

iPhone 14 Pro Contents

Contents

3 Introduction

Basics

- 6 Internal View
- 7 Orderable Parts
- 9 <u>Screws</u>
- 10 <u>Tools</u>

Safety

- 15 **Battery Safety**
- 18 **Broken Glass**

Procedures

- 20 First Steps
- 21 SIM Tray
- 22 **Display**
- 54 <u>Camera</u>
- 63 **Bottom Speaker**
- 67 Taptic Engine
- 72 <u>Battery</u>
- 86 Top Speaker
- 89 TrueDepth Camera

iPhone 14 Pro Introduction

Introduction

This manual includes technical instructions for replacing genuine Apple parts in iPhone and is intended for individual technicians with the knowledge, experience, and tools required to repair electronic devices.

Important

- Read the entire manual first. If you're not comfortable performing the repairs as instructed in this manual, don't proceed.
- Always use the latest version of this document available at support.apple.com/en_US/manuals/ iphone.



Warning

Failure to follow the repair instructions or to use genuine Apple parts or proper tools may cause fire or other safety issues and lead to personal injury or death.



Failure to follow the repair instructions or to use genuine Apple parts or proper tools may damage the iPhone, parts, or other property, or compromise the device's functionality or water resistance.

Warranty information

Damage caused by repairs performed outside of Apple or the Apple Authorized Service Provider network is not covered by Apple's warranty or AppleCare plans. Such damage may cause future repairs to be subject to out-of-warranty costs or render the device ineligible for future repairs by Apple or Apple Authorized Service Providers.

iPhone 14 Pro Introduction

Tools and parts

Hardware tools

Apple tools are designed to apply the appropriate heat, force, and torque during repairs, and to withstand high-volume professional use.

- The heated display removal fixture softens adhesive to allow separation of the display from the enclosure. The fixture is used with a heated display pocket designed for the device's specific dimensions.
- The display press applies the appropriate amount of pressure to secure new adhesive during display installation. The display press is used with a repair tray and display adhesive press plate designed for the device's specific dimensions.
- The battery press applies the appropriate amount of pressure to secure new adhesive during battery installation. The battery press is used with a repair tray designed for the device's specific dimensions.

Ordering tools and parts

You can learn how to order genuine Apple parts and tools at support.apple.com/self-service-repair. During the purchase process, enter the manual ID CBLXRW to indicate that you've read this manual in its entirety and agree that you have the knowledge and experience to perform your intended repair.

Software tools

A System Configuration step may be required at the end of your repair. System Configuration is a postrepair software tool that completes the repair for genuine Apple parts. Running System Configuration has a number of purposes that vary based on the part replaced.

What System Configuration does	Why it's important
Transfers factory calibration values	Certain parts like displays, cameras, and ambient light sensors have calibration values that are customized to each individual part during manufacturing. Transferring these values ensures maximum performance and quality after a repair.
Links Secure Enclave and biometric authentication parts	After repair of a logic board or a biometric authentication part (Touch ID or Face ID), linking the biometric sensors to the Secure Enclave on the logic board is required to ensure device security.
Ensures repair integrity	After a hardware repair, software checks are performed to ensure repair integrity. Repair integrity means that a genuine Apple part has been correctly installed.
Assigns wireless region	To comply with regional communications regulations, a wireless region must be assigned to your logic board.
Updates firmware	Keeping firmware up to date ensures that the device has all the latest security and performance features.

iPhone 14 Pro Introduction

System Configuration requirements

The minimum requirements for System Configuration include:

- The latest version of iOS—not a beta version—on the iPhone
- A strong Wi-Fi network capable of 1.0 Mbps download and upload speeds, with less than 400 ms latency and less than 2% packet loss. Estimated data usage to run System Configuration is 6-22 MB.

If the TrueDepth camera is replaced, System Configuration also requires:

- The latest version of Apple Service Utility installed on a Mac running macOS Monterey 12.4 or later
- Internet access for the Mac
- A Lightning cable

How to initiate System Configuration

Depending on the part replaced, you will initiate System Configuration through one of the following two methods:

Put the device into diagnostics mode. Tap Start Diagnostics and follow onscreen prompts.

or

Contact the online store where you purchased genuine Apple parts. See support.apple.com/selfservice-repair.

See the individual repair sections of this manual for more information.

Alerts

Failure to follow alerts could result in fire, injury, data loss, or damage to the device, parts, or other property.

Warning	Instructions for reducing risk of personal injury
Caution	Instructions for reducing risk of data loss or device hardware damage
Important	Supplemental information for successfully completing procedures; neither a Warning nor a Caution

iPhone 14 Pro Internal View

Internal View



- 1. Top speaker
- 2. Top speaker grille
- 3. TrueDepth camera assembly
- 4. Camera
- 5. Camera flex cables
- 6. Top battery adhesive tab
- 7. Battery
- 8. Bottom battery adhesive tabs
- Bottom speaker
- 10. Lightning connector

- 11. Bottom microphones
- 12. Taptic Engine
- 13. SIM reader (only in iPhone models purchased outside of the United States)
- 14. Battery flex cable
- 15. Display/Multi-Touch connector
- 16. Dock flex cable
- 17. Logic board
- 18. Ambient light/proximity sensor connector
- 19. TrueDepth camera flex cables
- 20. Grounding strap

iPhone 14 Pro Orderable Parts

Orderable Parts

Name	Numbers	Screws
Battery	661-30382	_
Battery shim	923-08537	_
Bottom speaker	923-08123	923-08147 (3) lower left, upper left, upper right 923-08377 (1) lower right
Camera	661-29369	_
Camera cowling	923-08125	923-08160 (4) lower left 923-08375 (1) top 923-08376 (1) lower right
Display	661-29370	_
Display adhesive	923-08094	_
Logic board cowling	923-08126	923-08155 (5) middle, lower right 923-08156 (1) left 923-08157 (2) upper right, middle left
Rubber gasket	923-08127	_
Security screws	_	923-08428 (2) space black 923-08429 (2) silver 923-08430 (2) gold 923-08431 (2) deep purple
SIM tray	923-08340 dual, space black 923-08341 dual, silver 923-08342 dual, gold 923-08343 dual, deep purple 923-08354 single, space black 923-08355 single, silver 923-08356 single, gold 923-08357 single, deep purple	_
Top speaker grille	923-08129	

iPhone 14 Pro Orderable Parts

Name	Numbers	Screws
Taptic Engine	923-08124	923-08149 (1) left 923-08151 (1) upper right (super screw) 923-08374 (1) bottom
Top speaker	923-08128	923-08159 (2) upper middle, lower right
Top speaker grille	923-08129	_
Top speaker grounding strap	923-08365	_
TrueDepth camera	661-29367	_

iPhone 14 Pro Screws

Screws



Warning

Never reinstall a screw after it has been removed. Install only new screws. iPhone screw grooves are covered in adhesive that can't be reused.

Use only the torque driver indicated to install new screws during reassembly. Both overtightened screws and loose screws can damage parts.

Note: You can use any torque driver to remove screws.



Torque driver (black, 0.35 kgf cm) Torque driver (green, 0.45 kgf cm)

Torque driver (gray, 0.55 kgf cm) Torque driver (blue, 0.65 kgf cm) Torque driver (teal, 0.75 kgf cm)

Crosshead screw Super screw*

Trilobe screw

Security screw

- Single screw
- Screw with super screw underneath

^{*}A super screw has a threaded hole that holds another screw.

iPhone 14 Pro Tools

Tools

Tools with part numbers are available for purchase from the Self Service Repair Store. Tools without part numbers can be purchased from electronics supply retailers.

923-07560 923-07561 661-29193 6.1-inch back protective cover 6.1-inch display protective cover 6.1-inch heated display pocket 923-08087 923-01092 923-02657 6.1-inch repair tray Adhesive cutter **Battery press** 923-08081 661-08916 **Cut-resistant gloves** Display adhesive press plate Display press

iPhone 14 Pro Tools

ESD mat



ESD-safe cleaning solution



ESD-safe tweezers



ESD wrist strap with clip or plug



Ethanol wipes¹



661-28152 Heated display removal fixture²



Heat-resistant gloves



IPA wipes



923-01290 Micro stix® bit



Nitrile or lint-free gloves




922-5065 Nylon probe (black stick)



Safety glasses with side shields



iPhone 14 Pro Tools

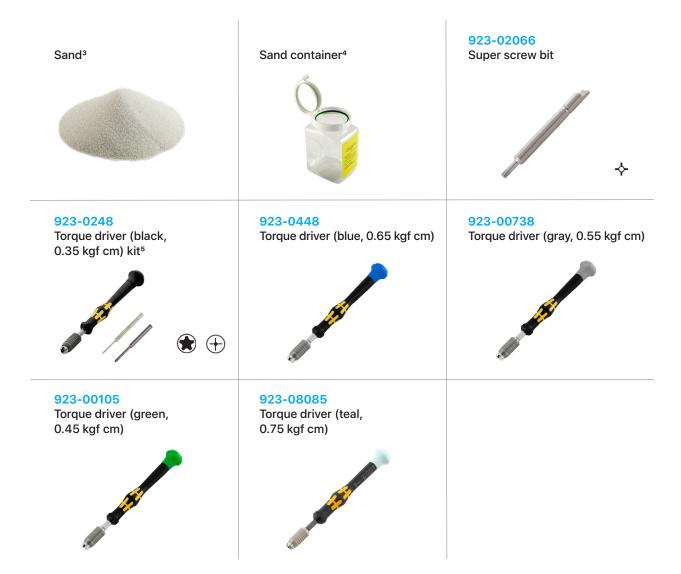

- ¹ Ethanol wipes must contain at least 90% ethanol and no additives except isopropyl alcohol.
- ² Refer to Heated Display Removal Fixture Operating Manual for general use and precautions.
- ³ Clean, dry, untreated sand (8–10 cups)
- ⁴ Sand container (wide-mouthed, quick pour, nonbreakable plastic container with a flip-top lid)
- ⁵ The black torque driver kit includes a black torque driver (0.35 kgf cm), Torx® security bit (923-0247), and JCIS bit (923-0246). The bits are also available separately.

Heated Display Removal Fixture

Note: A rented heated display removal fixture may have different packaging than shown. If your fixture came with a USB cable, set the cable aside. This setup doesn't require it.


1. Remove the fixture from the box. Then remove the packing foam.



Don't lift the fixture by the knob.




2. Cut and remove the zip tie from the handle.

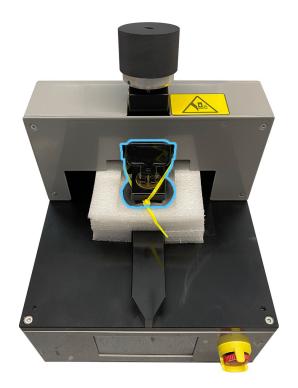

3. Turn the top knob on the fixture counterclockwise to raise the suction cup. Remove the packing foam.



4. Turn the emergency stop knob clockwise until it clicks and protrudes from the stop guard.

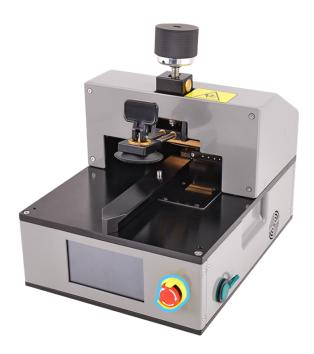

5. Plug the power cord into the fixture. The fixture won't turn on until you flip the switch on the back.

Battery Safety iPhone 14 Pro

Battery Safety



Warning

This device contains a built-in lithium-ion rechargeable battery with soft battery cells. Battery safety is the number one concern when repairing a device with a built-in lithium-ion battery.

- Only technicians with the knowledge, experience, and tools required to repair electronic devices should replace a battery.
- Improper battery replacement, improper handling of parts, failure to discharge the battery before repair, or failure to follow the provided instructions could cause battery overheating, swelling, venting, leaking, or a battery thermal event. These events could result in fire, injury, death, data loss, or damage to the device, parts, or other property.
- To avoid these potentially harmful events, follow the battery safety guidelines and work in a safety-focused workspace with the tools listed below. It's important to be prepared for all possible outcomes.

How to set up a workspace for battery safety

Tools

- Clean, dry, untreated sand (8–10 cups)
- Sand container (wide-mouthed, quick pour, nonbreakable plastic container with a flip-top lid)
- Heat-resistant gloves
- Safety glasses with side shields
- ESD-safe cleaning solution

Workspaces used to repair Apple devices should meet the following criteria:

- Nonflammable and electrostatic discharge (ESD)-safe work bench
- At least 2 feet away from paper and other combustible materials
- Sand container within reach (2 feet) on one side of the workspace, not above the workspace
- Adequate ventilation

iPhone 14 Pro Battery Safety



How to handle a battery thermal event

A battery thermal event is a rapid chemical chain reaction that occurs inside a battery cell. The energy stored in the battery is released suddenly, which can cause outgassing and fire. A battery thermal event can be triggered by physical damage to the battery, improper replacement or repair, or temperatures outside the battery's operating range.

Act immediately if you notice any of the following signs of a battery thermal event:

- The lithium-ion battery or a device that contains one begins to smoke or emit sparks or soot.
- The battery pouch suddenly and quickly puffs out.
- The lithium-ion battery or a device that contains one begins to emit hissing or popping sounds.

Do smother the battery or device immediately with plenty of clean, dry sand. Dump the sand all at once. Timing is critical — the faster you pour all the sand, the sooner the reaction will be contained.

Do contact local fire authorities if further assistance is needed.

Do leave the room for 30 minutes after the reaction is contained. Ventilate the area. Don't return until the area is clear of smoke.

Do wait 30 minutes before touching the device. Wear the heat-resistant gloves and safety glasses with side shields to remove the device from the sand.

Do wipe the affected area with water first. Then wipe the area with an ESD-safe cleaning solution.

Do dispose of the damaged battery or device (including any debris removed from the sand) according to local environmental laws and guidelines.

iPhone 14 Pro Battery Safety

How to handle batteries



Warning

Fully discharge the battery before you begin a repair. A discharged battery is less susceptible to a battery thermal event. If you can't determine the battery level, don't repair the device.

Perform the following steps to discharge the battery:

- Disconnect all external cables.
- Remove all cases and covers.
- Turn on the flashlight from the Lock Screen, in Control Center, or by asking Siri. Wait until the device has turned off and the flashlight is no longer illuminated.



(!) Caution

The flashlight produces heat. Keep the iPhone in a well-ventilated area while the flashlight is illuminated.

Best practices

- To avoid noxious fumes or a battery thermal event, don't puncture, strike, or crush a lithium-ion battery or a device that contains one.
- Keep your workspace clear of foreign objects and sharp materials.
- Be careful when using sharp tools near the battery.
- Don't leave loose screws, extra screws, or small parts inside the device.
- Don't use tools that conduct electricity.
- Don't throw or drop the battery.
- Don't expose the battery to excessive heat or sunlight, or temperatures outside the battery's operating range.
- Handle and dispose of waste batteries in accordance with local laws and regulations.

Broken Glass iPhone 14 Pro

Broken Glass



Warning

iPhone displays and some back covers are made of glass. The glass could break if the iPhone is dropped on a hard surface, receives a substantial impact, or is crushed, bent, or deformed. Don't attempt to remove chipped or cracked glass shards without protection.

Tools

- Back protective cover
- Cut-resistant gloves
- Display protective cover
- Heated display pocket
- Safety glasses with side shields
- Vacuum cleaner

If the iPhone glass is broken, perform the following steps before you begin a repair:

- 1. Put on safety glasses with side shields and the cut-resistant gloves.
- 2. Use a vacuum cleaner to remove glass pieces from your workspace and the iPhone.
- 3. Attach a protective cover to the broken glass to prevent injury or scattering of glass. Each protective cover has a release liner underneath. Slowly pull the release liner out from under the protective cover while pressing the cover onto the enclosure.
- 4. Fold the release liner. Use the shiny side of the release liner to firmly press the protective cover onto the broken glass and smooth out any air bubbles.



- 5. Wait at least 12 minutes for the bond between the protective cover and the glass to strengthen.
- 6. If the back glass is broken, place the iPhone into the heated display pocket.

iPhone 14 Pro Broken Glass

If the iPhone has any of the following conditions, stop the repair:

- There's no glass or insufficient glass for the protective cover to adhere to.
- The protective cover doesn't adhere to the iPhone.
- The iPhone doesn't fit in the heated display pocket.

You can find a service option at support.apple.com/repair.

iPhone 14 Pro First Steps

First Steps

Always perform the following steps before starting a repair:

- Back up the iPhone.
- Discharge the battery fully.
- Turn off the iPhone.
- Disconnect all cables.
- Remove all cases and covers.
- Clear and clean your workspace.
- Put on an ESD wrist strap and attach it to a properly grounded ESD mat.



Caution

ESD (electrostatic discharge, or the release of static electricity) can damage electronic components.

Be aware of the following while performing a repair:

- The manual for this model may show images of other models, but the procedures are the same. Ensure that you use the correct tools for the model you're repairing.
- Take your time. Thoroughly read all instructions and alerts.
- Magnetizing the torque drivers will make it easier to work with small screws.
- The end of each flex cable must align with its connector. Press the end of each flex cable to its connector until it clicks to ensure that it's secure.



Warning

Loose screws, extra screws, or small parts inside the device can damage the battery and cause safety issues. Set aside all parts and screws removed during the repair and account for them at the end of the repair.

iPhone 14 Pro SIM Tray

SIM Tray

Important

iPhone 14 models purchased in the United States don't have SIM trays.

Tools

SIM-eject tool or paper clip

Removal

- 1. Find your model to locate the SIM tray.
- 2. Insert a paper clip or SIM-eject tool into the hole next to the SIM tray.
- 3. Push the paper clip or SIM-eject tool toward the enclosure to eject the SIM tray.
- 4. Remove the SIM tray.

Reassembly

1. Press the SIM tray back into the side of the enclosure.

iPhone 14 Pro Display | Before You Begin

Display

Before You Begin




Warning

- Read <u>Battery Safety</u> and follow workspace and battery handling guidelines before you begin.
- Read Broken Glass before you begin.

Tools

- 6.1-inch heated display pocket
- 6.1-inch repair tray
- Adhesive cutter
- Display adhesive press plate
- Display press
- ESD-safe tweezers
- Ethanol wipes or isopropyl alcohol (IPA) wipes
- Heated display removal fixture
- Heat-resistant gloves
- Micro stix bit
- Nylon probe (black stick)
- Torque driver (gray, 0.55 kgf cm)
- Torque driver (green, 0.45 kgf cm)
- Torx security bit

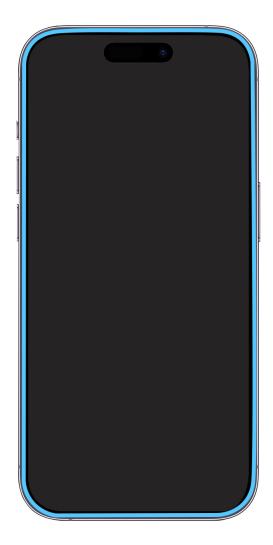



Caution

To avoid damaging the lenses, don't touch the TrueDepth camera assembly or nearby parts.





Caution

- Don't touch the back of the display. Touching the back of the display may affect image quality.
- This procedure requires **System Configuration**. After you've completed all removal and reassembly steps, follow the instructions to initiate System Configuration.

Important

Read <u>Heated Display Removal Fixture</u> if you're setting up the fixture for the first time.

Removal


1. Place the enclosure in the repair tray with the Lightning connector facing the cutout.

2. Use a torque driver and the Torx security bit to remove the two security screws, one from each side of the Lightning connector. Set aside the screws.



3. Flip the switch on the back of the heated display removal fixture to turn it on. The internal fan will turn on. Wait for a checkmark to appear on the screen.

> Note: If an error code appears on the screen, turn off the fixture and turn it back on.

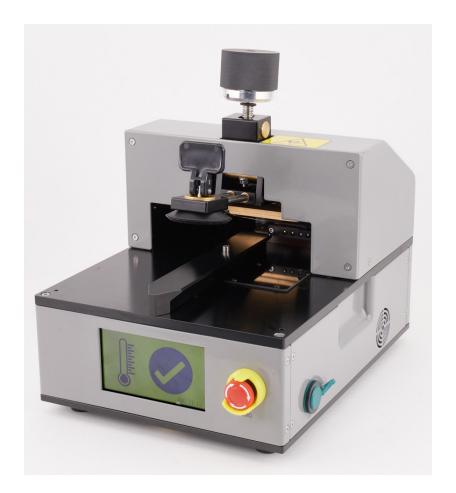

4. Take the iPhone out of the repair tray. Gently insert the iPhone into the heated display pocket with the display faceup and the Lightning connector facing the bottom of the pocket.




(Caution

Ensure that you don't scratch the iPhone as you insert it into the heated display pocket.

Important

Ensure that the clamp on the side of the pocket is flipped up.







iPhone 14 Pro Display | Removal

6. Put on the heat-resistant gloves. Align the cutout on the bottom of the pocket with the rail on the fixture. Slide the pocket with the iPhone onto the rail on the fixture.



Warning

Don't insert the pocket into the fixture without wearing the heat-resistant gloves.



iPhone 14 Pro Display | Removal

7. Slide the pocket into the fixture until the pocket clicks into place.



Note: The screen on the fixture will turn red and the timer will count down from 2 minutes while the pocket heats to the correct temperature. When the timer shows 0, the fixture will start to beep and the screen will turn green.



8. Turn the knob on the fixture clockwise to lower the suction cup as close to the iPhone as possible without touching the iPhone.



Caution

To avoid damaging the iPhone, don't turn the knob before the timer shows 0, the fixture beeps, and the screen has turned green.

Note: The fixture will beep until the suction cup is lowered.

9. Grasp the handle and slide the suction cup straight out until the edge of the suction cup aligns with the bottom edge of the display.



Caution

Failure to align the edges of the suction cup and the display may damage the iPhone.





iPhone 14 Pro Display | Removal

10. Turn the knob on the fixture clockwise to lower the suction cup onto the display (1). Then flip down the handle on the suction cup to secure the suction cup to the display (2).

Important

Once the suction cup is lowered onto the iPhone, the screen will begin a 15-minute countdown. When the timer shows 0, the heated display removal fixture will turn off. Ensure that you complete steps 11 and 12 within this time frame.



11. Slowly turn the knob on the fixture counterclockwise until the display begins to separate from the enclosure.

Important

If you don't see a gap between the display and the enclosure immediately, wait 30 seconds. If you still don't see a gap, turn the silver part of the knob counterclockwise until the display begins to separate from the enclosure.



12. Insert the edge of the adhesive cutter between the display and the enclosure. Run the cutter between the display and the enclosure to the right and left as shown until the display partially releases from the enclosure.








Caution

To avoid damaging the display flex connectors, don't tilt up the bottom of the display more than 5 degrees.

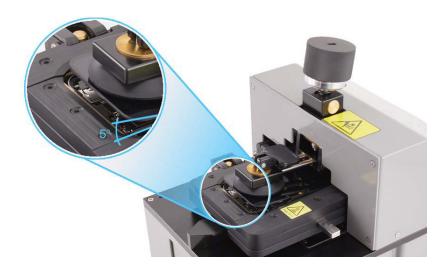

13. Flip up the handle to release the suction cup (1). Gently slide the flat end of the black stick under the edge of the suction cup to release it from the display (2).



Caution

Don't turn the knob. Turning the knob may damage the flex cables.



14. Press the eject button on the side of the pocket to release the pocket from the fixture.



15. Hold both sides of the pocket and slide it straight out of the fixture.



16. Flip up the clamp on the side of the pocket to release the iPhone (1). Hold the area outlined in blue and gently remove the iPhone from the pocket (2).



Caution

Don't scratch the iPhone as you remove it from the heated display pocket.



iPhone 14 Pro Display | Removal

17. Place the iPhone into the repair tray with the display faceup and the Lightning connector facing the cutout. Remove the gloves.

- 18. Slide the display slightly toward the bottom of the iPhone.
- 19. Insert the edge of the adhesive cutter into the top of the iPhone between the display and the enclosure. Hold the adhesive cutter at a 45-degree angle. Cut along the top and sides of the iPhone until the display is free.



Caution

To avoid damaging the display flex cables, don't tilt up the bottom of the display more than 5 degrees.





20. Insert the repair tray suction cups into the slots in the repair tray.



iPhone 14 Pro Display | Removal

21. Tilt up the display toward the suction cups. Press the top and bottom edges of the display to secure it to the suction cups.

> Note: The icon on the bottom of the repair tray shows the correct direction to tilt up the display.



(!) Caution

- To avoid damaging the enclosure or display, ensure that the internal display clips are released before you tilt up the display.
- Don't damage the flex cables as you tilt up the display.





Warning

If the battery is dented, punctured, or otherwise damaged, stop the repair. You can find a service option at support.apple.com/repair.

22. Use a torque driver and Micro stix bit to remove the eight trilobe screws from the logic board cowling. Set aside the screws.



23. Use ESD-safe tweezers to slightly lift the logic board cowling. Ensure that the bottom tab on the logic board cowling clears the display flex cable as you lift it.



24. Use ESD-safe tweezers to slide the logic board cowling out from under the ambient light sensor flex cable (1). Then lift the cowling out of the enclosure (2). Save the cowling for reassembly.



(1) Caution

Don't tear the ambient light sensor flex cable while removing the cowling.



iPhone 14 Pro Display | Removal

25. Use the black stick to lift the end of the battery flex cable (1) off the connector.



Caution

You must disconnect the battery flex cable first to ensure that the iPhone stays turned off.

26. Use the black stick to lift the ends of the display flex cable (2) and the ambient light sensor cable (3) off the connectors.




- 27. Hold the display by the edges. Pull the tabs on the suction cups to release them from the display. Then set the display facedown on a clean, flat surface.
- 28. Remove the suction cups from the repair tray.
- 29. Use ESD-safe tweezers to pick up the adhesive. Then pull the adhesive at 45-degree angle as shown to remove it from the enclosure. Repeat this process until all the adhesive is removed from the perimeter of the enclosure.



(!) Caution

Don't touch the TrueDepth camera assembly, grounding springs, or nearby parts.

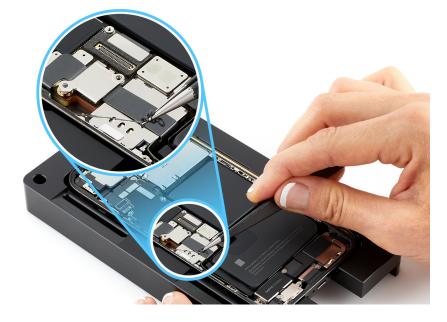

iPhone 14 Pro Display | Removal

30. Use ethanol wipes or IPA wipes to clean all residual adhesive from the enclosure.



Don't use ethanol wipes or IPA wipes on the display. Ethanol or isopropyl alcohol may damage the display and affect image quality.

 $\ @$ 2023 Apple Inc. All rights reserved.

Reassembly

1. Inspect the internal display clips for damage before reassembly. Ensure that the internal display clips are at a 90-degree angle and aren't bent or damaged.

Important

- If the internal display clips are damaged, you may need to replace the display.
- If you're installing a replacement display, peel the protective liner from the top and underside.
- 2. Place the enclosure in the repair tray with the Lightning connector facing the cutout.
- 3. Inspect the TrueDepth camera. Ensure that the top edge of the TrueDepth camera is under the lip of the enclosure.



(!) Caution

If the TrueDepth camera is positioned incorrectly, use the black stick to move it into the correct position.





Warning

Inspect the enclosure for loose or extra screws and small parts, which can damage the battery and cause safety issues.

4. Inspect the two pieces of foam on the top speaker grille. If either piece is missing or damaged, continue to step 5. If the foam is intact, skip to step 9.



5. Use ESD-safe tweezers to remove the top speaker grille from the enclosure.



6. Use ESD-safe tweezers to peel the adhesive liner off the back of the replacement top speaker grille.



7. Position the replacement top speaker grille in the cutout on the lip of the enclosure. Ensure that the adhesive side of the speaker grille faces the side of the enclosure.



8. Position the tip of the ESD-safe tweezers in the middle of the top speaker grille. Slightly move the tweezers from side to side to ensure that the speaker grille is firmly adhered to the enclosure and doesn't move.



9. Align the replacement display adhesive over the enclosure. Ensure that the top holes of the adhesive align over the TrueDepth camera assembly.



Caution


Ensure that you've removed all adhesive residue from the display and the enclosure before you apply the replacement display adhesive.

10. The replacement display adhesive has a top release liner, a middle release liner, and a flexible bottom release liner. Grasp the tab on the bottom release liner. Then slowly pull the bottom release liner (1) out from under the adhesive (2) while pressing the adhesive onto the enclosure.



Important

Don't remove the top release liner yet.







Note: The replacement display adhesive for your model may look different from the illustration, but the steps are the same.



11. Inspect the adhesive to ensure that it's positioned on the lip of the enclosure. If the adhesive isn't correctly positioned, repeat removal steps 29 and 30. Then repeat reassembly steps 1 through 10.

12. Place the display adhesive press plate on top of the enclosure with the icon in the top right corner as shown.



13. Position the repair tray with the iPhone in the display press. Pull down the lever until the display press locks.



14. Wait until the display press beeps and the timer shows 0. Pull down the lever (1) and pull out the release knob (2). Then lift the lever (3).



Caution

To ensure that the display adhesive bonds correctly to the enclosure, don't lift the lever until 30 seconds have passed.




15. Remove the repair tray from the display press and remove the press plate.

16. Remove the left section of the top release liner first (1). Then remove the three sections running along the top (2), right (3), and bottom (4).

Important

Don't remove the middle release liner yet.








- 17. Insert the suction cups into the repair tray.
- 18. Align the left edge of the display with the left edge of the enclosure. Gently press along the edges of the display to secure it to the suction cups.

19. Press the ends of the ambient light sensor flex cable (1) and display flex cable (2) to the connectors. Press evenly along the length of each connector.

20. Press the end of the battery flex cable (3) to the connector. Press evenly along the length of the connector.

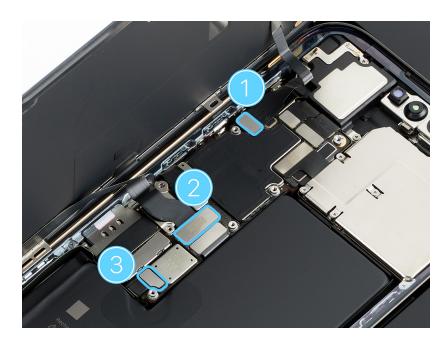


21. Use ESD-safe tweezers to slide the top tab of the logic board cowling behind the ambient light sensor flex cable (1). Then slide the edge of the cowling under the tab on the side of the enclosure (2) and slide the bottom tab behind the display flex cable (3). Lower the cowling over the ends of the flex cables.



22. Use the green torque driver and Micro stix bit to install the following eight new trilobe screws into the logic board:

- One trilobe screw (923-08156) (1)
- Two trilobe screws (923-08157) (2)
- Five trilobe screws (923-08155) (3)

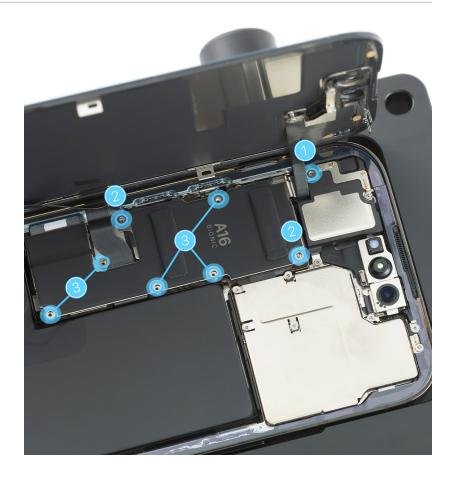


23. Peel the first strip from the middle release liner (1) clockwise, starting at the bottom right of the enclosure. Peel the second strip (2) counterclockwise, starting near the bottom right of the enclosure. Peel the third strip (3) clockwise, starting at the bottom left of the enclosure.



Caution

The third strip of the middle release liner runs under two flex cables. Don't damage the flex cables while removing the release liner.



Middle release liner



24. Inspect the display adhesive to ensure that it's in the correct position and isn't damaged or wrinkled. If the adhesive is damaged, remove it and apply replacement adhesive.

25. Inspect the TrueDepth camera. Ensure that the top edge of the TrueDepth camera is under the lip of the enclosure.



Caution

If the TrueDepth camera is positioned incorrectly, use the black stick to move it into the correct position.





Warning

Inspect the enclosure for loose or extra screws and small parts, which can damage the battery and cause safety issues.

- 26. Pull the tabs on the suction cups to release them from the display. Tilt down the display to rest on the enclosure.
- 27. Remove the suction cups from the repair tray.

28. Press all four corners of the display simultaneously. Then press along the edges of the display until the display clicks into place and is flush with the enclosure.




Raised edges



Caution

Ensure that the flex cables aren't trapped between the display and enclosure. Feel the edges of the display for variations or gaps. If the display isn't flush, repeat all removal steps and check the flex cables for damage. Then repeat reassembly steps 1 through 28.

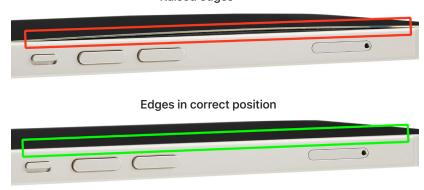

29. Position the repair tray with the iPhone in the display press. Pull down the lever until the display press locks.



30. Wait until the display press beeps and the timer shows 0. Pull down the lever (1) and pull out the release knob (2). Then lift the lever (3).



- 31. Remove the repair tray from the display press.
- 32. Use the gray torque driver and Torx security bit to install two new security screws, one on each side of the Lightning connector. As you install the screws, press lightly on the display near the Lightning connector. Count five clicks as you install each screw to ensure that the screws are fully installed.

Note: Use the correct screw color for your model.

- Deep purple (923-08431)
- Gold (923-08430)
- Silver (923-08429)
- Space black (923-08428)



!\ Caution

If the screws aren't flush, then remove and set aside the screws. Repeat step 32 to install another new set of screws. If the new screws still aren't flush, repeat all removal and reassembly steps.





System Configuration is required if you've installed a replacement battery, display, camera, or TrueDepth camera. Disregard notifications about iPhone features on the Lock Screen until you complete System Configuration.

- After you've completed all removal and reassembly steps, initiate System Configuration. The method of initiating System Configuration will vary depending on the part or parts replaced.
 - If you replaced the battery, or display, initiate System Configuration by putting the device into diagnostics mode. Tap Start Diagnostics and follow the onscreen prompts.
 - If you replaced the camera, learn how to initiate the System Configuration process at support.apple.com/self-service-repair.
 - If you replaced the TrueDepth camera, you will need the following:
 - The latest version of Apple Service Utility installed on a Mac running macOS 12.4 or later
 - Internet access
 - A Lightning cable

After you've installed Apple Service Utility on a Mac, learn how to initiate the System Configuration process at support.apple.com/self-service-repair.

Camera

Before You Begin



Warning

Read <u>Battery Safety</u> and follow workspace and battery handling guidelines before you begin.

Remove the following part before you begin:

Display

Tools

- 6.1-inch repair tray
- ESD-safe tweezers
- JCIS bit
- Micro stix bit
- Nitrile or lint-free gloves
- Nylon probe (black stick)
- Torque driver (black, 0.35 kgf cm)
- Torque driver (green, 0.45 kgf cm)
- Torque driver (teal, 0.75 kgf cm)





Caution

- To avoid damaging the lenses, don't touch the TrueDepth camera assembly or nearby parts.
- Avoid the grounding spring on the camera cowling.





Caution

This procedure requires System Configuration. After you've completed all removal and reassembly steps, learn how to initiate the System Configuration process at support.apple.com/self-service-repair. iPhone 14 Pro Camera | Removal

Removal

- 1. Place the enclosure in the repair tray with the Lightning connector facing the cutout.
- 2. Put on the gloves to prevent contamination of the camera lenses.
- 3. Use a torque driver and the Micro stix bit to remove the five trilobe screws (1) from the camera cowling. Set aside the screws.
- 4. Use a torque driver and the JCIS bit to remove the crosshead screw from the camera cowling (2). Set aside the screw.



5. Use ESD-safe tweezers to tilt up the camera cowling from the left side (1). Then slide the cowling tab out of the slot on the right side of the enclosure (2). Save the cowling for reassembly.



iPhone 14 Pro Camera | Removal

6. Position the ESD-safe tweezers under the top left corner of the top camera flex cable as shown. Then gently lift the end of the top camera flex cable off the connector.

> Note: One camera flex cable covers the other.



Caution

Ensure that you position the ESD-safe tweezers as shown to avoid damaging the top camera flex cable.



7. Position the ESD-safe tweezers under the bottom left corner of the bottom camera flex cable as shown. Then gently lift the end of the bottom camera flex cable off the connector.



Caution

Ensure that you position the ESD-safe tweezers as shown to avoid damaging the bottom camera flex cable.



Camera | Removal iPhone 14 Pro

8. Gently hold the camera flex cables together and lift the camera out of the enclosure.



Reassembly

1. Put on the gloves to prevent contamination of the camera lenses. Then hold the replacement camera with the lenses facedown and remove the protective cover from the camera lenses.

2. Hold the camera flex cables together. Then position the camera in the enclosure.



- 3. Press the end of the bottom camera flex cable to the connector.
- 4. Press the end of the top camera flex cable to the connector.
- 5. Lightly press the camera into the enclosure.

6. The camera cowling has a tab that fits into a slot under the lip on the right side of the enclosure. Hold the cowling with ESD-safe tweezers and slide the cowling tab into the slot. Then lower the cowling onto the camera.




Caution

- Ensure that the screw cutouts in the camera cowling align with the screw holes, and the tab is inside the slot in the enclosure. A misaligned cowling may affect display image quality.
- Ensure that the grounding spring on the camera cowling isn't damaged. Avoid touching the grounding spring as you reinstall the cowling.



7. Use the black torque driver and Micro stix bit to install four new trilobe screws (923-08160) (1) into the camera cowling.

- 8. Use the teal torque driver and JCIS bit to install one crosshead screw (923-08375) (2) into the camera cowling.
- 9. Use the green torque driver and Micro stix bit to install one new Micro stix screw (923-08376) (3) into the camera cowling.

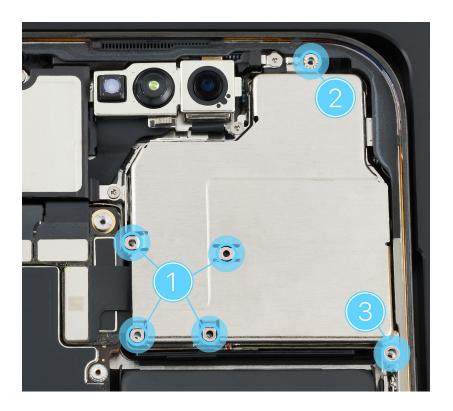

Reinstall the following part to complete reassembly:

Display




(1) Caution

After you've completed all removal and reassembly steps, learn how to initiate the System Configuration process at support.apple.com/self-service-repair.

During System Configuration, you will perform LiDAR Scanner calibration. Prepare for calibration by reviewing the following steps:

- 1. Use a well-lit area containing objects of different shapes and sizes.
- 2. Sit or stand 1 to 2 feet from the objects.
- 3. Hold the device vertically and rest your elbow on your body to help stabilize your arm.

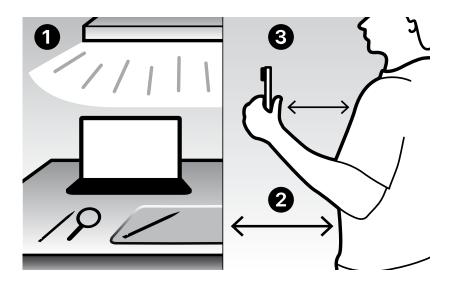

4. Start scanning by slowly panning back and forth to the left and right of the starting point. Follow the directions that appear on the device screen.



Note: The calibration process takes approximately 5 minutes.

Bottom Speaker

Before You Begin



Warning

Read <u>Battery Safety</u> and follow workspace and battery handling guidelines before you begin.

Remove the following part before you begin:

Display

Tools


- 6.1-inch repair tray
- ESD-safe tweezers
- JCIS bit
- Nylon probe (black stick)
- Torque driver (gray, 0.55 kgf cm)





(Caution

Avoid touching the grounding springs on the bottom speaker.

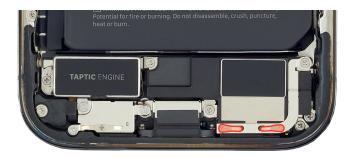


iPhone 14 Pro Bottom Speaker | Removal

Removal

1. Place the enclosure in the repair tray with the Lightning connector facing the cutout.

2. Use a torque driver and the JCIS bit to remove the four crosshead screws from the bottom speaker. Set aside the screws.

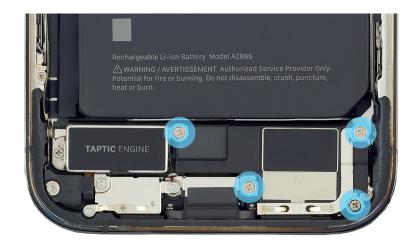

3. Slightly tilt up the bottom speaker as shown (1). Run the flat end of the black stick between the battery shim and the Taptic Engine and bottom speaker to loosen the adhesive on the battery shim (2).



4. Remove the bottom speaker from the enclosure.

Reassembly

1. Rotate the repair tray. Ensure that the rubber gasket is positioned as shown. If the gasket is out of position, use ESD-safe tweezers to reposition it.



2. Rotate the repair tray. Align the port on the bottom speaker with the rubber gasket. Then position the bottom speaker in the enclosure.



3. Use the gray torque driver and JCIS bit to install four new crosshead screws (923-08147) (1) (923-08377) (2) into the bottom speaker.



Caution

Don't damage the grounding springs on the speaker.



Reinstall the following part to complete reassembly:

Display

Taptic Engine

Before You Begin



Read <u>Battery Safety</u> and follow workspace and battery handling guidelines before you begin.

Remove the following parts before you begin:

- **Display**
- **Bottom speaker**

Tools

- 6.1-inch repair tray
- ESD-safe tweezers
- JCIS bit
- Nylon probe (black stick)
- Super screw bit
- Torque driver (blue, 0.65 kgf cm)
- Torque driver (teal, 0.75 kgf cm)




Taptic Engine | Removal iPhone 14 Pro

Removal

1. Place the enclosure in the repair tray with the Lightning connector facing the cutout.

2. Use a torque driver and the super screw bit to remove the super screw from the Taptic Engine. Set aside the screw.

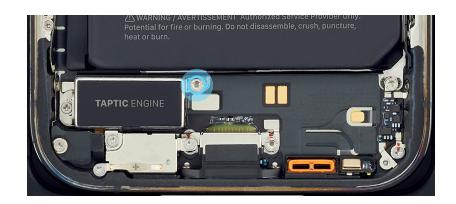

3. Use a torque driver and the JCIS bit to remove the two crosshead screws from the Taptic Engine. Set aside the screws.




iPhone 14 Pro Taptic Engine | Removal

4. Lift the end of the Taptic Engine flex cable off the connector.



5. Remove the Taptic Engine and battery shim from the enclosure.

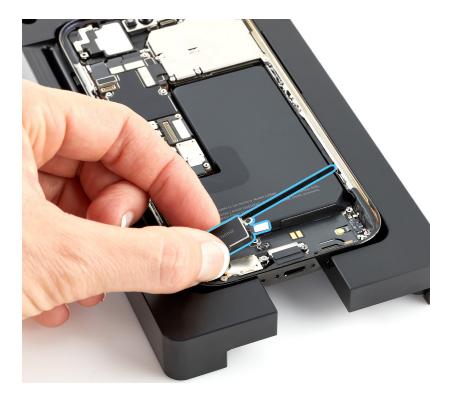

Reassembly

1. If you're reinstalling the existing Taptic Engine, keep the battery shim attached. If you're installing a replacement Taptic Engine, peel the battery shim off the original Taptic Engine and adhere it to the replacement.



- 2. Position the Taptic Engine and battery shim in the enclosure.
- 3. Press the end of the Taptic Engine flex cable to the connector.



4. Use the blue torque driver and super screw bit to install one new super screw (923-08151) into the Taptic Engine.



5. Use the teal torque driver and JCIS bit to install two new crosshead screws (923-08149) (1) (923-08374) (2) into the Taptic Engine.



Reinstall the following parts to complete reassembly:

- **Bottom speaker**
- Display

Battery

Before You Begin



Warning

- A battery should be replaced only by individual technicians with the knowledge and experience to repair electronic devices. Improper battery replacement, improper handling of parts, or failure to follow the provided instructions could result in fire, injury, data loss, or damage to the device, parts, or other property.
- Read Battery Safety and follow workspace and battery handling guidelines before you begin.

Remove the following parts before you begin:

- Display
- Bottom speaker
- **Taptic Engine**

Tools

- 6.1-inch repair tray
- Battery press
- ESD-safe cleaning solution
- ESD-safe tweezers
- Ethanol wipes or isopropyl alcohol (IPA) wipes
- Heat-resistant gloves
- Nylon probe (black stick)
- Safety glasses with side shields
- Sand
- Sand container





Caution

To avoid damaging the lenses, don't touch the TrueDepth camera assembly or nearby parts.





This procedure requires System Configuration. After you've completed all removal and reassembly steps, follow the instructions to initiate System Configuration.

Battery | Removal iPhone 14 Pro

Removal

1. Place the enclosure in the repair tray with the Lightning connector facing the cutout.

2. Use ESD-safe tweezers to grasp the bottom left battery adhesive tab. Gently peel the adhesive tab away from the battery.

> **Note:** The battery has three adhesive tabs.





Don't scrape or puncture the battery with the tweezers.




Battery | Removal iPhone 14 Pro

3. Hold down the iPhone. Use ESD-safe tweezers to continue peeling the adhesive tab from the battery.

Important


Peel the adhesive tab completely from the battery before twisting it around the tweezers.

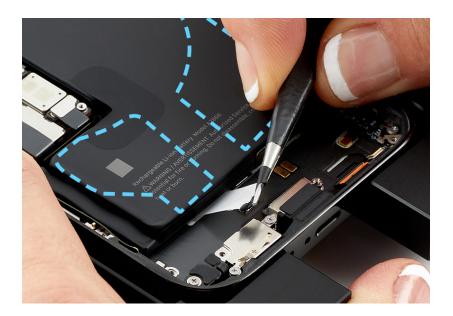

4. Keep the tweezers close and parallel to the battery and twist until you see white adhesive strip on the tweezers.

Important

Don't pull the tweezers until the white adhesive is wrapped around them.

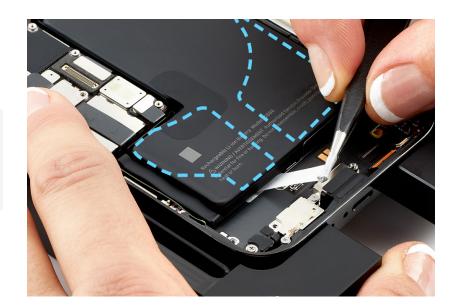

5. Pull the tweezers toward the Lightning connector at the bottom of the iPhone and continue to twist the adhesive until you've removed the entire strip.



(Caution

Don't pull the adhesive strip against parts or screws.

Important

If the battery adhesive tab or strip breaks off and you can still see it, attempt to retrieve it with the tweezers. Wrap the tab or strip around the tweezers and repeat steps 4 and 5. If you can't see the tab or strip, continue to step 6.

- 6. Use ESD-safe tweezers to grasp the bottom right battery adhesive tab. Gently peel the adhesive tab away from the battery.
- 7. Repeat steps 3 through 5 to remove the bottom right adhesive strip from the battery. If you remove the entire strip, continue to step 8.

Important

If the battery adhesive tab or strip breaks off and you can still see it, attempt to retrieve it with the tweezers. Wrap the tab or strip around the tweezers and repeat steps 4 and 5. If you can't see the tab or strip, continue to step 8.

8. Rotate the repair tray.


9. Hold down the iPhone. Use ESD-safe tweezers to gently peel the battery adhesive tab from the top of the battery.



10. Twist the tweezers to wrap the adhesive tab around them.

Important


Hold the tweezers close and parallel to the battery as you twist.

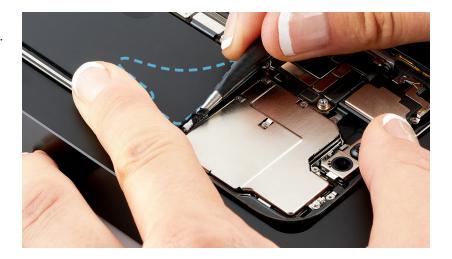

11. Keep the tweezers close to the channel between the battery and the camera cowling. Continue to slowly twist the tweezers until you've removed the entire adhesive strip.

Important

If the battery adhesive tab or strip breaks off and you can still see it, attempt to retrieve it with the tweezers. Wrap the tab or strip around the tweezers and repeat step 11. If you can't see the tab or strip, continue to step 12.

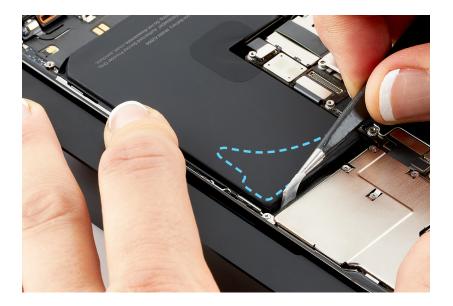

12. If all three battery adhesive strips were fully removed, continue to step 14. If at least one strip was fully removed, continue to step 13.



Warning


If all three strips were broken and can't be retrieved, don't forcibly pry the battery. Stop the repair. You can find a service option at support.apple.com/repair.

Battery | Removal iPhone 14 Pro



Caution

When using the black stick to remove the battery from the enclosure, don't damage the flex cables. Don't scrape, rip, tear, or otherwise damage the polyester film or other areas. If damage occurs, replace the iPhone.

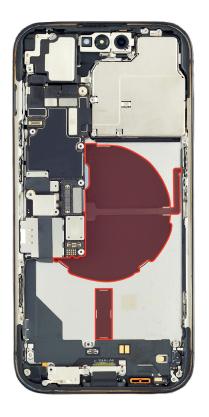

13. Insert the flat end of the black stick only into one of the insertion points as shown. Ensure that the black stick is inserted into a point where the battery strip has been fully removed. Don't insert the black stick into a point where the battery tab or strip is broken.



14. Slightly lift the battery with the black stick just enough to grasp underneath the battery.



(Caution

To avoid damage, don't press the black stick on the edge of the enclosure as you lift the battery.

15. Remove the battery from the enclosure. Then inspect the enclosure for damage. If the enclosure is damaged, replace the iPhone.



Warning

If you can't remove the battery, stop the repair. You can find a service option at <u>support.apple.com/repair</u>.

Battery | Reassembly iPhone 14 Pro

Reassembly

- Reinstall the **Taptic Engine**.
- 2. Reinstall the bottom speaker.
- 3. Use ethanol wipes or IPA wipes on the area shown in blue to remove any remaining adhesive from the enclosure.




Caution

Don't use ethanol wipes or IPA wipes on the areas outlined in red. Ethanol or isopropyl alcohol may damage the polyester film and wireless charging unit.



Warning

Inspect the enclosure for loose or extra screws and small parts, which can damage the battery and cause safety issues.

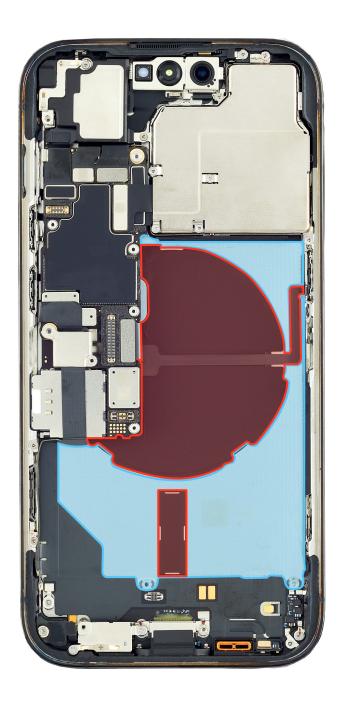

Battery | Reassembly iPhone 14 Pro

4. Peel the pink release liner from the underside of the replacement battery.

Important

Don't remove the battery protective cover from the top of the battery yet.




5. Hold the battery over the enclosure with the protective cover faceup. Align the bottom of the battery with the bottom speaker (1) and the right edge with the enclosure (2). Then lower the battery into the enclosure.

> Note: The protective cover for your replacement battery may look different, but the steps are the same.




iPhone 14 Pro Battery | Reassembly

6. The center of the repair tray has two slots. Position the repair tray and enclosure onto the battery press with the left slot over the pin as shown.

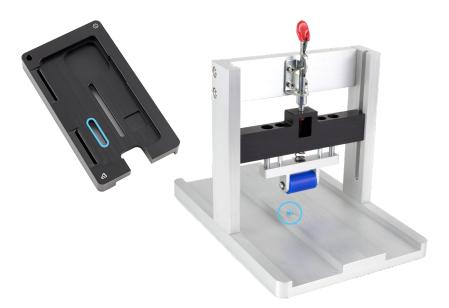


7. Flip down the red lever at the top of the battery press to lower the roller onto the battery.

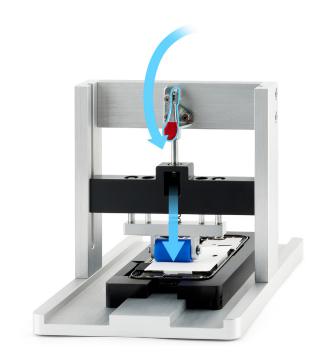

Battery | Reassembly iPhone 14 Pro

8. Slide the repair tray back and forth through the battery press three times to adhere the battery to the enclosure.



- 9. Flip up the lever.
- 10. Position the repair tray and enclosure onto the battery press with the right slot over the pin.



- 11. Flip down the lever.
- 12. Slide the repair tray back and forth through the battery press three times to adhere the battery to the enclosure.
- 13. Flip up the lever.

iPhone 14 Pro Battery | Reassembly

- 14. Remove the repair tray from the battery press.
- 15. Hold the edges of the battery protective cover. Pull the release tabs on the protective cover to remove it from the battery.

Important

Don't press the area over the tab you're releasing.



Reinstall the following part to complete reassembly:

Display



Warning

Gently shake the iPhone. If the battery sounds loose, remove the display and the battery. Then complete battery reassembly with another replacement battery.

Important

A new battery is not charged. After you've completed all removal and reassembly steps, charge the device for a few minutes.



(!) Caution

After you've completed all removal and reassembly steps, initiate System Configuration by putting the device into diagnostics mode. Tap Start Diagnostics and follow the onscreen prompts.

Top Speaker

Before You Begin



Warning


Read <u>Battery Safety</u> and follow workspace and battery handling guidelines before you begin.

Remove the following part before you begin:

Display

Tools

- 6.1-inch repair tray
- ESD-safe tweezers
- JCIS bit
- Nitrile or lint-free gloves
- Nylon probe (black stick)
- Torque driver (gray, 0.55 kgf cm)

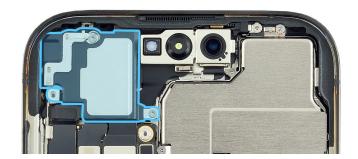



Caution

- To avoid damaging the lenses, don't touch the TrueDepth camera assembly or nearby parts.
- Avoid the grounding spring on the camera cowling.



iPhone 14 Pro Top Speaker | Removal

Removal

1. Place the enclosure in the repair tray with the Lightning connector facing the cutout.

- 2. Put on the gloves to prevent contamination of the camera lenses.
- 3. Use a torque driver and the JCIS bit to remove the two crosshead screws from the top speaker. Set aside the screws.



4. Use the black stick to tilt up the top speaker as shown. Then lift the top speaker out of the enclosure.



Reassembly

- 1. Position the top speaker in the enclosure.
- 2. Use the gray torque driver and JCIS bit to install two new crosshead screws (923-08159) into the top speaker.



Reinstall the following part to complete reassembly:

Display

TrueDepth Camera

Before You Begin



Warning

- Read Battery Safety and follow workspace and battery handling guidelines before you begin.
- The TrueDepth camera includes one or more lasers. Disassembly of the TrueDepth camera, damage to the TrueDepth camera, or failure to use genuine Apple parts could expose you to hazardous infrared laser emissions, possibly resulting in injuries to eyes or skin.

Remove the following parts before you begin:

- Display
- Top speaker

Tools

- 6.1-inch repair tray
- ESD-safe tweezers
- Nitrile or lint-free gloves
- Nylon probe (black stick)





(!\ Caution

This procedure requires System Configuration. To perform System Configuration you will need the following:

- The latest version of Apple Service Utility installed on a Mac running macOS Monterey 12.4 or later
- Internet access
- A Lightning cable

After you've completed all removal and reassembly steps and installed Apple Service Utility on a Mac, learn how to initiate the System Configuration process at support.apple.com/self-service-repair.

Removal

- 1. Place the enclosure in the repair tray with the Lightning connector facing the cutout.
- 2. Put on the gloves to prevent contamination of the camera lenses.
- 3. Use ESD-safe tweezers to lift the ends of the two TrueDepth camera flex cables off the connectors.



4. Gently hold the TrueDepth camera flex cables together and lift the TrueDepth camera out of the enclosure.




Reassembly

- 1. Put on the gloves to prevent contamination of the camera lenses.
- 2. Inspect the TrueDepth camera assembly to ensure that the grounding foam and grounding springs are intact. If either is missing or damaged, replace the TrueDepth camera assembly.
- 3. Position the TrueDepth camera in the enclosure.



(!) Caution

Don't remove the protective covers yet.

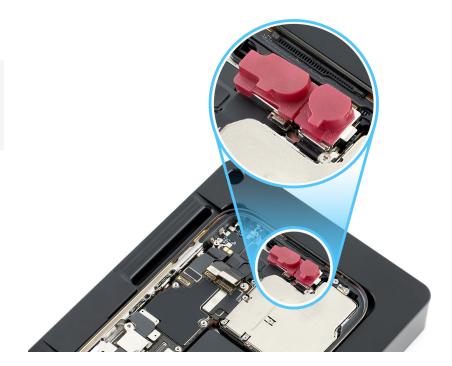

- 4. Reinstall the top speaker.
- 5. Remove the protective covers from the TrueDepth camera.
- 6. Inspect the TrueDepth camera assembly. Ensure that the top edge of the camera assembly is under the lip of the enclosure.



- If the TrueDepth camera is positioned incorrectly, use the black stick to move it into the correct position.
- Don't touch the front of the TrueDepth camera assembly after the protective covers are removed.

Reinstall the following part to complete reassembly:

Display



Caution

- After you've completed all removal and reassembly steps, learn how to initiate the System Configuration process at support.apple.com/self-service-repair.
- You will need a Mac with Apple Service Utility installed to perform System Configuration.

Micro stix® is a registered trademark of OSG CORPORATION. Torx® is a registered trademark of Acument Intellectual Properties, LLC.