

## Section 17 – Router Control Utility

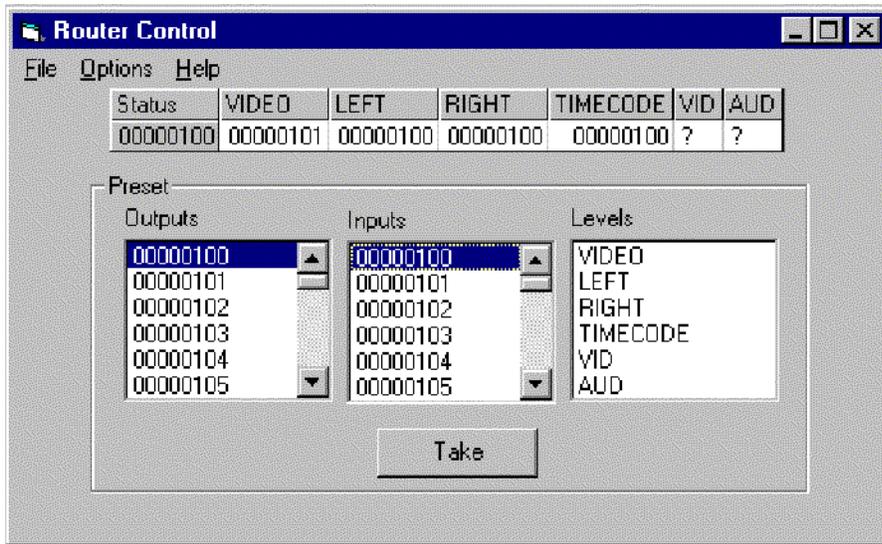


Figure 17-1.

This application allows the user to do simple Takes using any control panel input, output and level set in their currently active set.

### Configuration

When you first open the Router Control Utility, you will see the Configure window. You must select an input, output, and level set. These sets will be used when making switches.

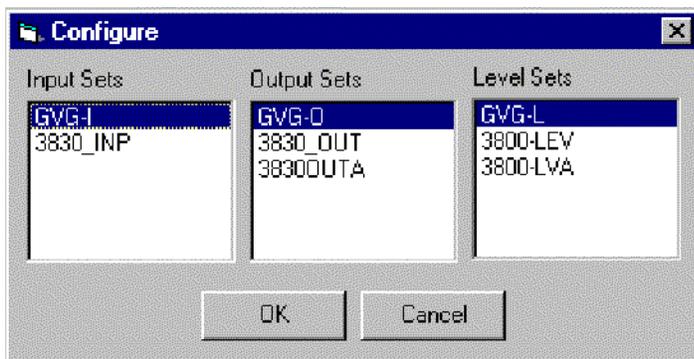


Figure 17-2.

Click on one of each set and then click on OK. The Configure dialog will disappear and the Outputs, Inputs, and Levels lists in the Router Control window will fill with entries from the selected control panel sets. You can return to the Configure dialog by selecting the "Configure" command from the Options menu.

## **Displaying Status**

The table at the top of the window displays the status for the currently selected output. Initially, the grid is empty because no output is selected. To display status for an output, select an output from the Outputs list. The name of the output appears in the first column, and status is displayed for each level in the selected level set. If nothing is currently switched to the output in any of the levels, “?” will appear. If the display will not fit across the window, a scroll bar will appear below the table. You can also resize the window to see more levels.

## **Doing Takes**

To do a Take, select one input, one output, and one or more levels. To deselect a level, click on it again. Click the Take button. The status display should update accordingly.

## **Menus**

### File

Exit - Close the application.

### Options

Configure – Display the Configuration dialog (see above).

### Help

About - Display the application’s about box with version information.