


Section 3 – Karrera, Kayenne, GV Korona - Survival Operations

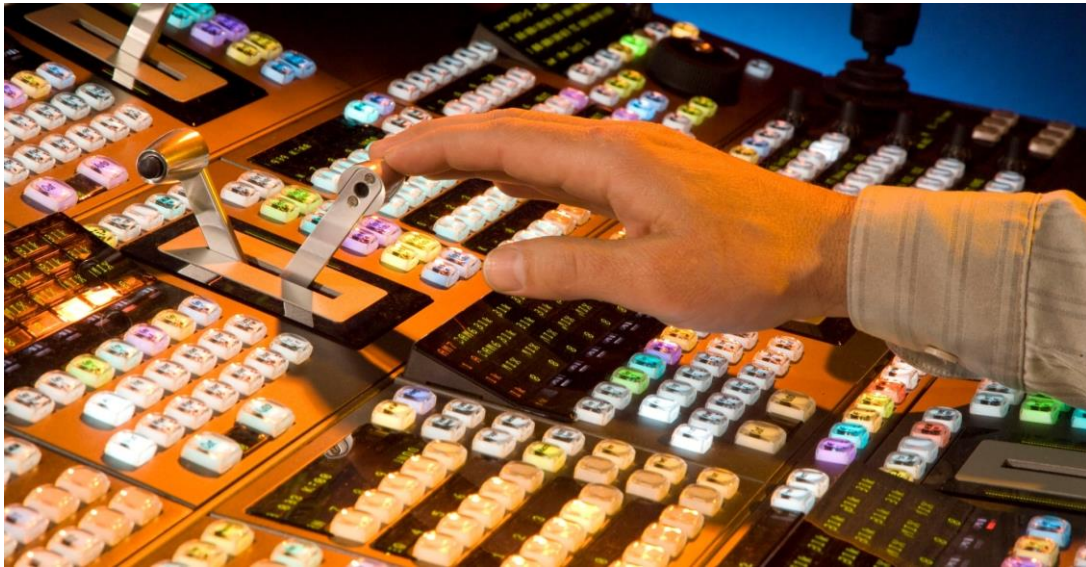

3-1

Section 3 – Karrera & Kayenne Survival Operations

- Source Selection Module
 - Delegations
- Transition Module
 - Display
 - Background Transitions
 - Key controls
- Multi Function Module
 - Keys, Mattes and Wipes
- Local E-MEM module
- Master E-MEM module
 - Basic Timelines
 - Basic iDPM
- Exercise



3-2

This section covers the layout and basic operation of switcher functions.

This is not an operators class and is provided to allow an engineer or technician to check out system operability.

[illegible]

Section 3 – Karrera & Kayenne Objectives

Section Objectives

- Understand how to use Bus Delegation
- Explain the ME Panel Transition panel operation
- Know the basic functions of the E-MEM module
- Understand the Multi-Function Module features
- Be able to set up and transition a Key
- Know how to select wipe patterns
- Understand how to store an ME setup in E-MEM
- Be able to explain the concept of E-MEM Levels and E-MEM Preferences
- Know how to build a simple timeline in Master E-MEM
- Demonstrate how to Set up a simple DPM Box Effect




3-3

This course covers the Kayenne and Karrera systems, starting with Version 5, the 3 Gbps compliant “K-Frame”. The same hardware is used for Karrera and Kayenne Panels and Menus. Older Non K-frame systems will remain at version 4.x.

This course is intended to cover all K-Frame products including the S-series and the differences between hardware and software as needed. When specifics are not called out, assume that they are the same for both products.

Kayenne Source Selection Module

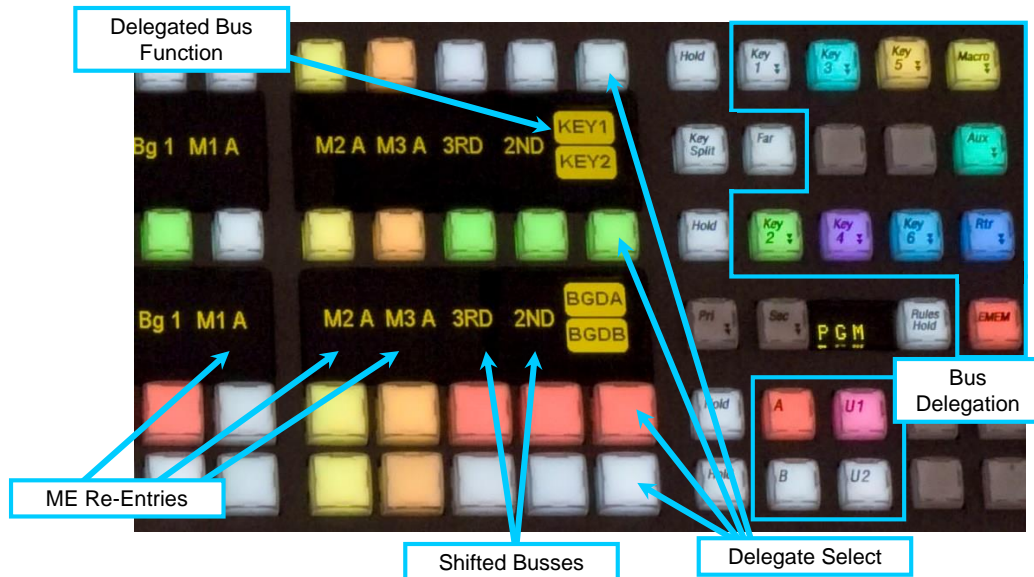

3-4

Bus Delegations include any of the 6 Keys, 6 Background busses (A, B, C, D, U1, U2) Macro, Aux, Router and E-MEM. These delegations are remembered as part of Panel Memory. Some bus delegations are not possible for some busses.

All bus sources including ME reentries, 2nd and 3rd Shift buttons and the bus delegate function can be mapped as needed to any button.

A single press and hold of the 2nd or 3rd (Shift) CrossPoint buttons above will temporarily change the selected bus to a shifted set of sources.


DPOP (Double Press Operation) will allow the user to lock certain buttons into another or second function. In some cases a DPOP will delegate a menu to the desired function. For example:

- DPOP a wipe key on any transition panel will select the wipe menu on the menu panel AND delegate that screen to the ME and Key or Background you are working with.
- DPOP the 2ND or 3RD CrossPoint buttons above will lock the bus into the 2nd or 3rd (shifted) source selections.

The Delegate Select buttons allow the user to change the function of a row of buttons. In the example above, the top row of white buttons is currently delegated to Key 1 Sources

To change the row delegation from Key 1 to Key 5 (or any other), press and hold the Delegate Select button for that row and while holding, select a choice from the Bus Delegation area. In this example, Key 5. Release buttons and display for the row will now show Key 5 instead of Key 1.


Kayenne Source Selection Module - K-Frame

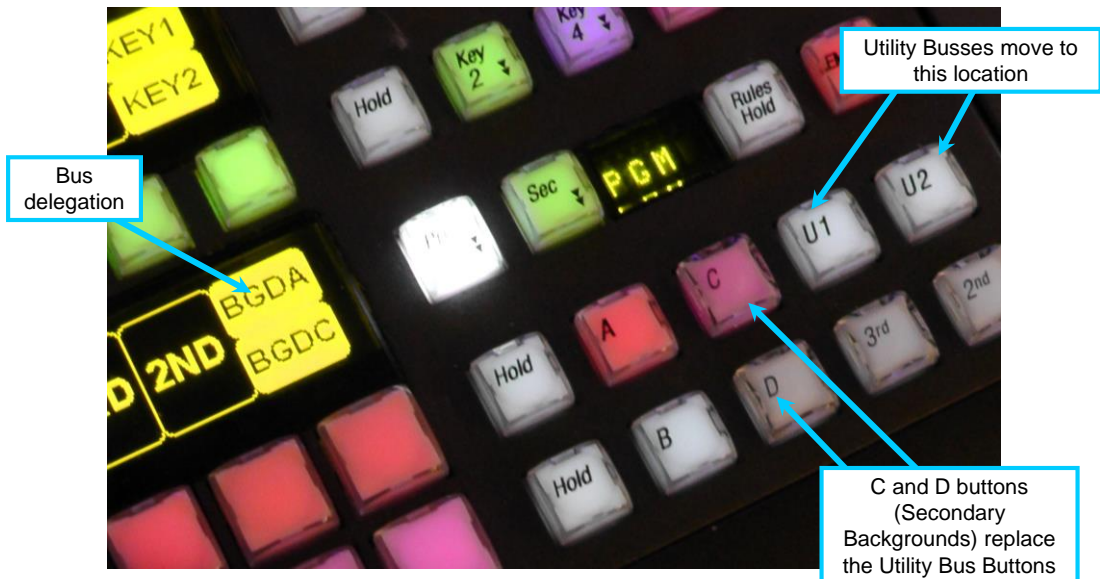

3-5

The K-Frame has 2 buttons for C and D which replace the Utility busses as the Secondary ME backgrounds. In the S-series the Utility busses are not present. The Utility buss functions are provided by the C and D buses in the S-series frames. The Karrera panel has a similar arrangement.

Karrera Source Selection Module

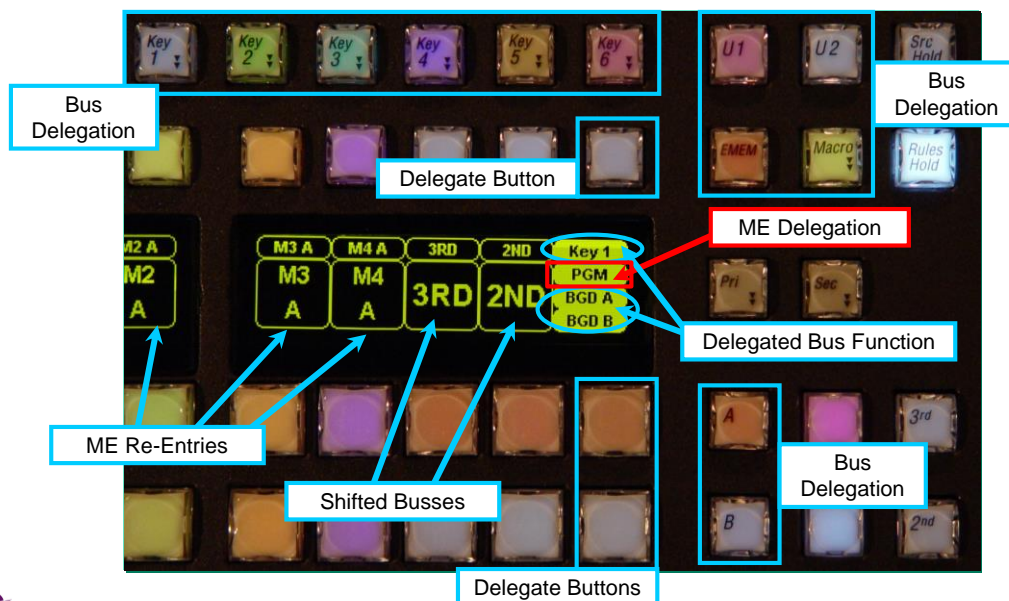

3-6

All bus sources including ME re-entries, 2nd and 3rd Shift buttons can be mapped as needed to any button. Bus Delegate function buttons cannot be remapped or assigned to different locations.

Source Selection. The display and bus colors will change to show the bus status. The delegated bus functions are displayed in the associated panel display.

Holding down a Bus Delegation button provides temporary access to the selected bus for quick

Holding down the Bus Delegation button while pressing the bus Delegate button changes the delegated bus assignment.

Some bus delegations are not possible for some busses.

Bus Delegations

Source Hold
Rules Hold
Primary
Secondary
3rd Shift
2nd Shift

Note: There are no A or B bus delegate buttons



3-7

To delegate back to A and B busses select 'Pri' and press the delegate button on the main bus row.

Karrera & Kayenne Transition Module

- Selecting Transition Components
 - Background A/B or C/D* and Keyers K1, K2, K3, K4, *K5, *K6
- Selecting Transition Modes
 - Mix
 - Primary and Secondary Wipes
 - User Transitions – Matte, FAM, NAM
 - Preset Black Transitions
 - Key Priority Transitions
- Previewing Transitions
- Setting Transition Rates
- Keyer Hot Cut/Mix Buttons
- Combining operation of Keys and Background Transitions




3-8

*There are no Keyers 5 and 6 on the S-series systems, and the C/D busses are used for the Utility Busses.

The C/D busses are only usable when the ME is in Split Mode.

The C/D busses do work as the Utility busses in the V and S-series frames

Kayenne Transition Module (1)

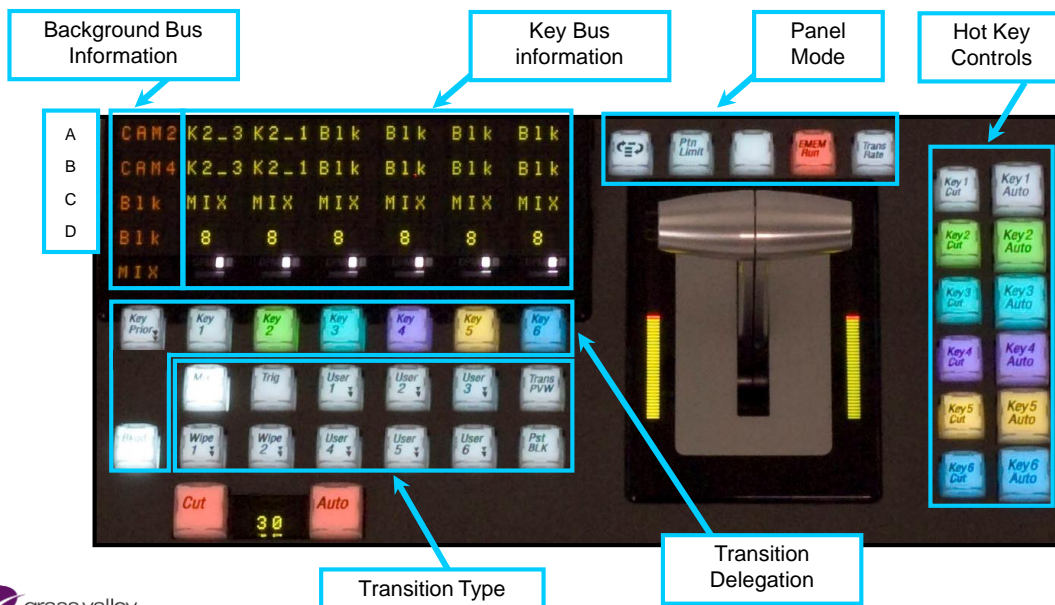

Transition delegation controls what will change when a transition is made.

The image resulting from delegation selections is shown on the ME Look Ahead Preview output.

The Transition type selects the type of transition – Mix , Wipe, User etc.

Display shows the sources on the A, B, C and D busses and the Key busses.

Transition type, rates and status is also displayed.

Note: Key 5 and Key 6 will be non operational on K Frame S-series systems.

Key Priority change

Split Key Bus Information

Red Tally information


iDPM active

Yellow Buttons are Active Replaced Macros

Key partition indicators
Primary (White)
Secondary (Green)

The display also shows Tally, Key partition, iDPM and Priority status information. Split keys are also displayed when the key is different from the source assignment. Any active replaced Macro buttons show yellow.

Karrera Transition Module

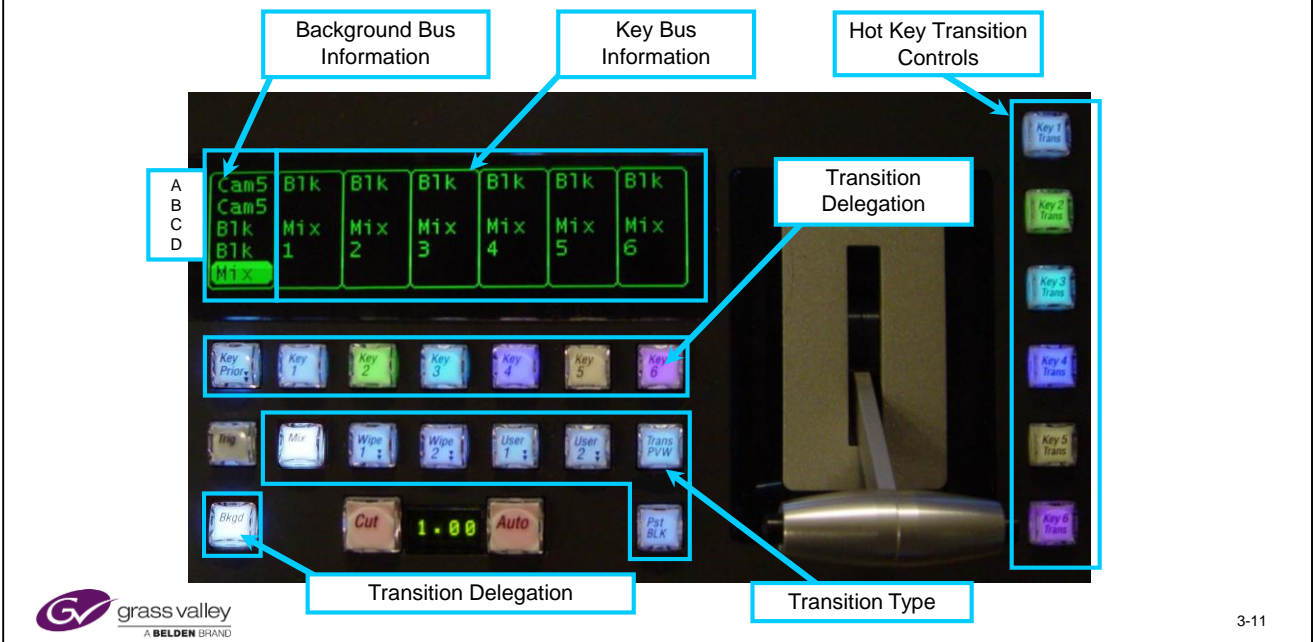

Transition Delegation buttons control what will change when a transition is made. Sometimes referred to as 'Next transition' buttons. The result of delegation selections is shown on the ME Look Ahead Preview output.

The Transition Type buttons select the type of transition – Mix , Wipe, User etc.

The Transition Display shows the current sources on the A, B, C and D and Key busses. Transition type, transition rates and key status is also displayed.


The Hot Key controls provide instant Key Cut or Key Mix control of all 6 Keyers on the ME.

Keyers 5 and 6 will be non-operational with K Frame S-series systems.

The double triangles on some buttons indicate a double press (D-Pop) will call up the associated menu page..

The Background, Mix and Key Priority buttons may be moved between these three locations for user convenience. (User Setups/Panel prefs)

Karrera Panel - Transition Module – S-series

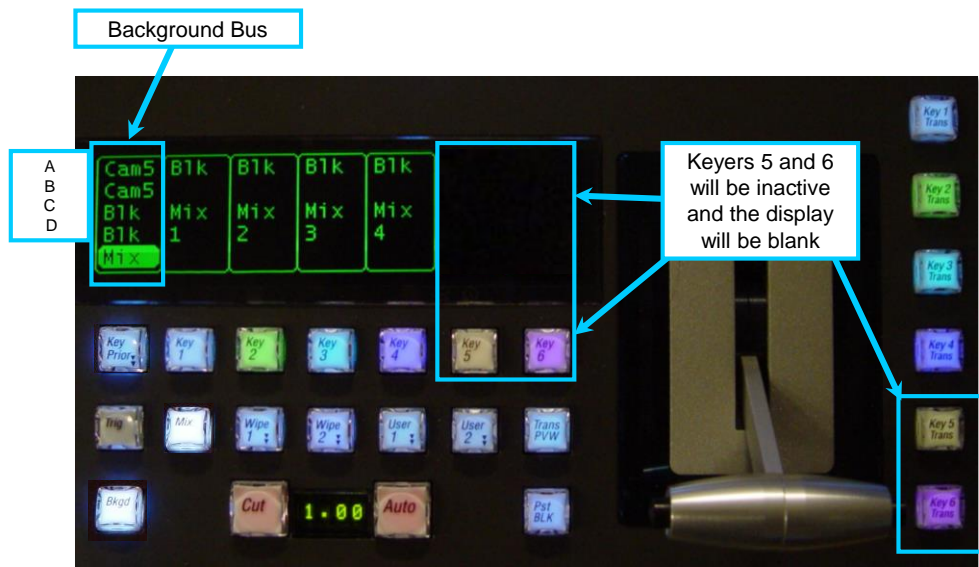


3-12

On the S-series and V-series frames the only changes are:

Keyers 5 and 6 will be inactive wherever they are present, such as the transition panel, bus delegation or the Multi Function Module.

The Utility 1 and 2 buttons will also be inactive.

GV Korona Panel - Transition Module

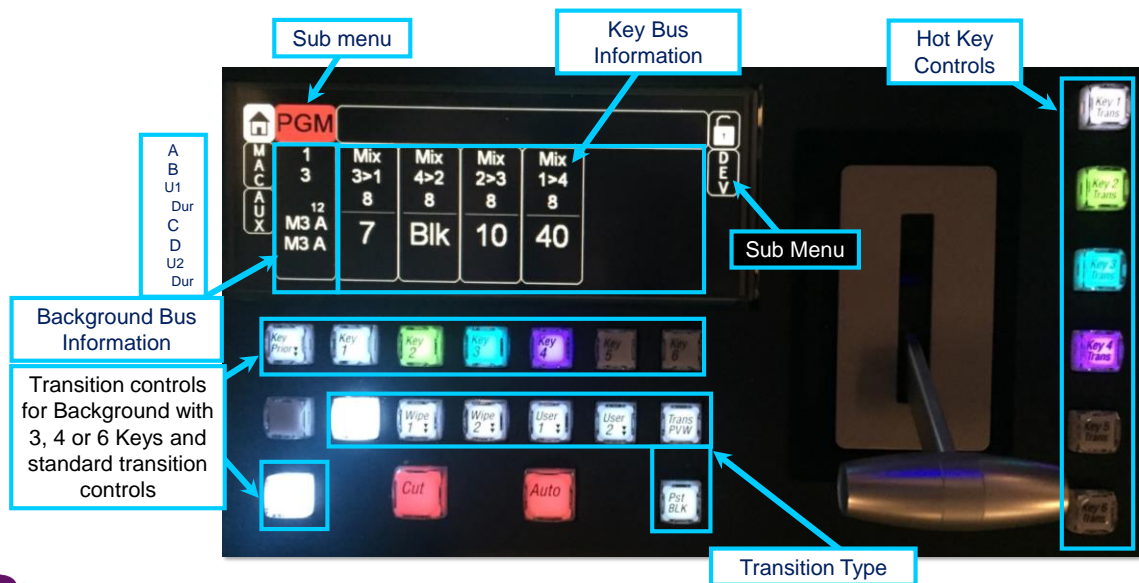

3-13

Transition Delegation buttons control what will change when a transition is made. Sometimes referred to as 'Next transition' buttons. The result of delegation selections is shown on the ME Look Ahead Preview output.

The Transition Type buttons select the type of transition – Mix , Wipe, User etc.


The Transition Display shows the current sources on the A, B, C, D and Key busses. Transition type, transition rates and key status is also displayed.

- The Hot Key controls provide instant Key Cut or Key Mix control of all 4 Keyers on the ME. (Keyers 5 and 6 are for use with a Large K-Frame system)

- The double triangles on some buttons indicate a double press (D-Pop) will call up the associated menu page.

- Note: The Background, Mix and Key Priority buttons may be moved to one of three locations for user convenience. See Panel Prefs Menu..

Transition Menu

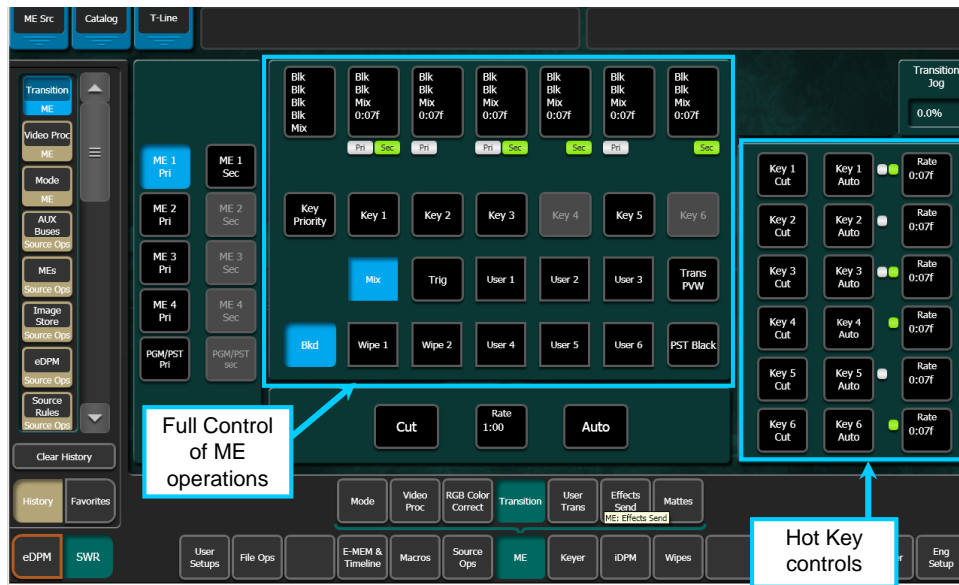

3-14

The Menu ME transition controls provide the same capability as the Transition panel buttons, except Macros.

Keyers 5 and 6 will be non-operational with K Frame S-series and V-series systems.


Background Display

K-Frame

A
B
C
D



Kayenne Transition Rates

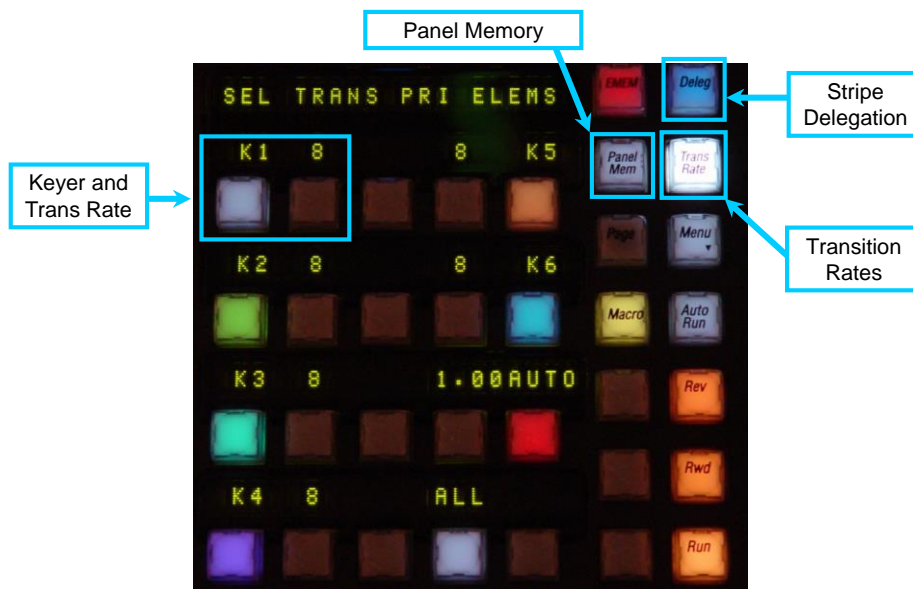


3-15

Transition rates can be entered as a number (frames), seconds by entering a '.' following a number, or seconds, '.', frames, '.', fields.

ie entering 50 will give 50 frames, entering 5. will give seconds, 1.3.1 will give 1 second, 3 frames and 1 field.

Keyers 5 and 6 will be missing with K Frame S-series and V-series systems.

Karrera Transition Rates

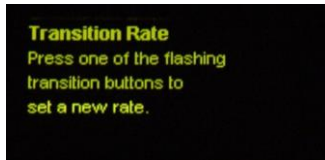

1. Press the "Menu" Button.
2. Select "Trans Rate" - The above display will show
3. Chose and press one of the flashing keys (Auto Trans & Hot Cut Keys)
4. Use the menu at right to set the rate



3-16

- Transition rates can be entered as a number (frames), seconds, '.', frames, or seconds, '.', frames, '.', fields

Kayenne Panel Multi Function Module - Home

- The Multi Function module provide access to many useful control groups these are:
 - Keys
 - Mask
 - 2DPM (Option)
 - iDPM
 - eDPM (Option)
 - Wipe
 - Devs (Devices)
 - Copy
 - Swap
 - Ssel (Source Select)
 - Cams
 - Matt
 - Panel




3-17

The Multi Function Module (MFM) provides fast access to many functions.

'Adel' (Auto Delegate) allows transition buttons on the ME's to keep the MFM in step with the operator's selections.

Keyers 5 and 6 will be non-operational with K Frame S-series systems.

Kayenne Multi Function Module - Keyer

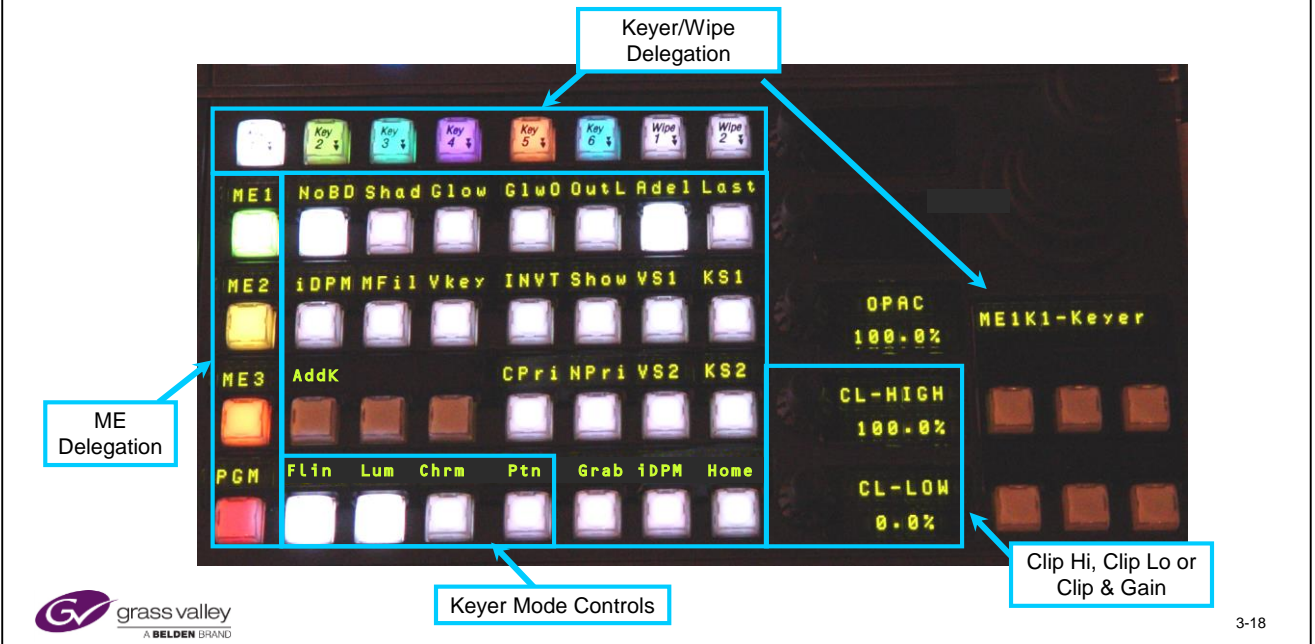


The Keyer panel mode of the Multi Function Module provides selection of the basic mode (Fixed Linear, Adjustable Linear, Luminance, Chrominance Keys or Preset Pattern). DPOP the Keyer button to access the Keyer menu.

Keyers 5 and 6 will be non-operational with K Frame S-series systems.

Karrera Multi Function Panel

- Keyer & DPM Delegation & Control

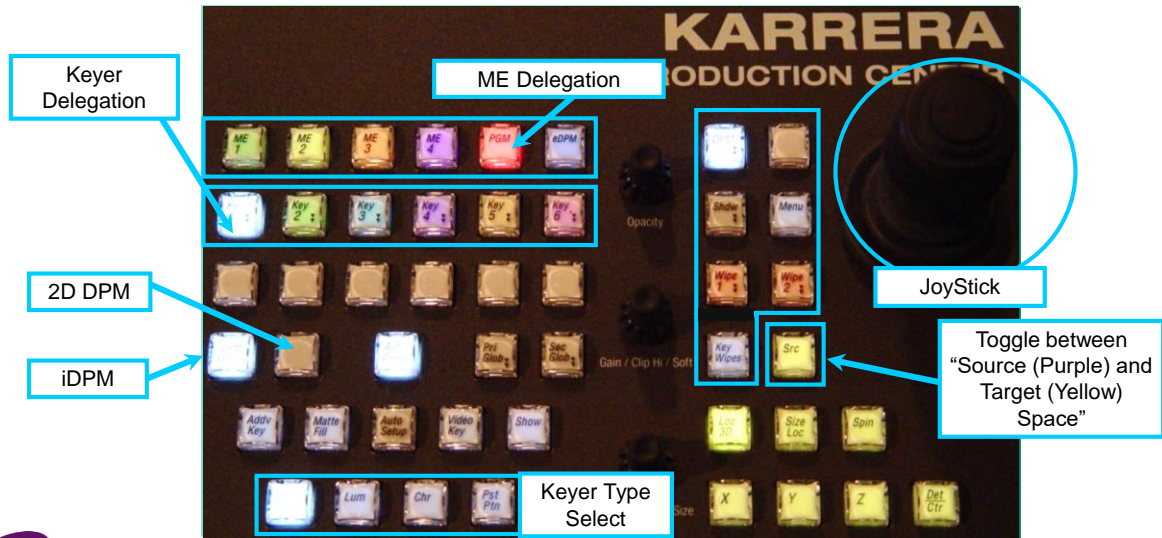

3-19

The Multi-Function section of the panel is delegated to the current ME and Keyer automatically if Auto Delegation is on. (Auto Deleg)


If "Auto Deleg" is off, all delegations will have to be made manually.

Many of the Transform Controls that are on the Kayenne MFM can only be accessed on Karrera from the Transform and Keyer Menus.

Keyers 5 and 6 will be non-operational with K Frame S-series systems.

Karrera Horizontal Keyer Control

- Horizontal Keyer Controls provide:
- Convenient Keyer Control Location
- Cut or Transition any Keyer, any ME regardless of Panel Stripe Delegation
- Color Coded for ME and Keyer identification
- All buttons are Hot Key buttons

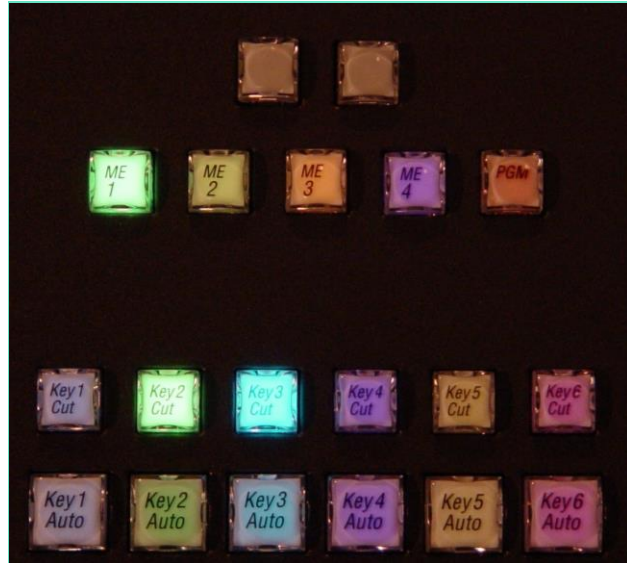

3-20

Horizontal Keyer Control is a new feature that has been requested by many Operators (TDs).

This section allows for fast (hot) control of either cutting or initiating the current transition via an Auto-Trans.

Fast access to any or all 6 Keys on all of the MEs regardless of Panel Stripe Delegation.

Keyers 5 and 6 will be non-operational with K Frame S-series systems.

Keyer Status and Mode selection



3-21


All Keyers on all of the MEs have Linear and Luminance key, Chroma Key (option), Preset Pattern, Masking and 2DPM or iDPM (option)

All Keyers in the K-frame have the same functionality: Chroma Key, Preset Patterns, Key Masks, and 2D-DPMs (if Licensed).


The only exception to this on the K-Frame is the Controller ME cannot use an iDPM channel.

Keyers 5 and 6 will be non-operational with K Frame -S-series and V-series systems.

Keyers on the K-Frame S-series and V-series do not have Key Stores

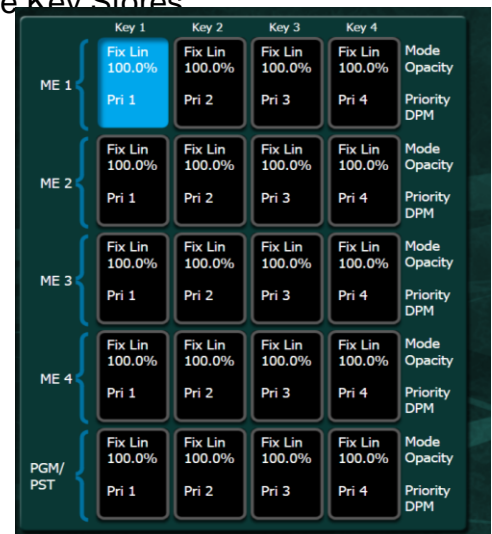

Keyer - Chroma Keyer

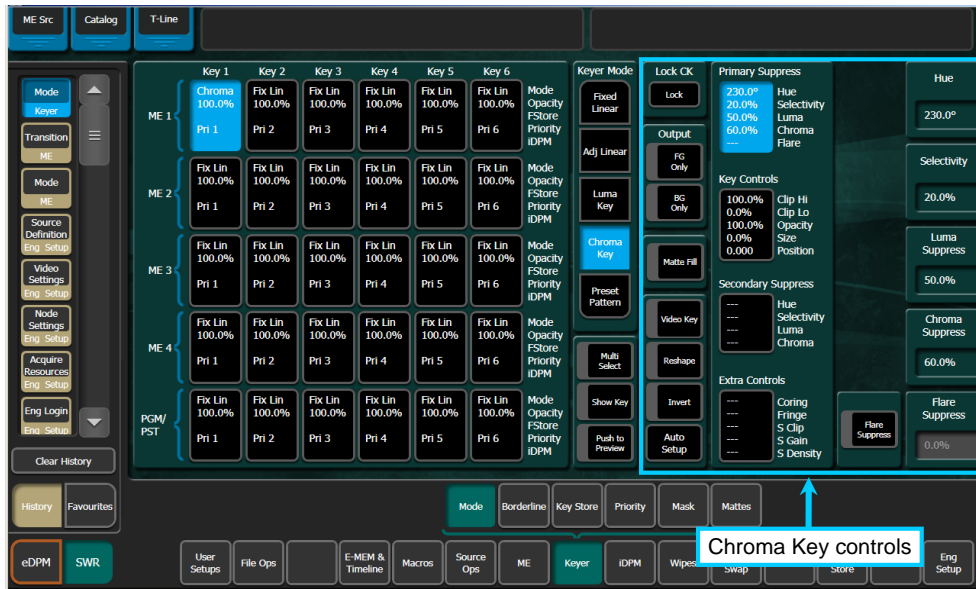


3-22

Use Auto setup to perform a quick Chroma Key. This sets the main Chroma Key parameters of Hue, Selectivity, Luma and Chroma Suppression and Clip Hi and Clip Lo settings for the chosen color.

All other Chroma Key controls must be set manually.

Keyers 5 and 6 will be missing with K Frame S-series and V-series systems.

Keyer - Key Stores

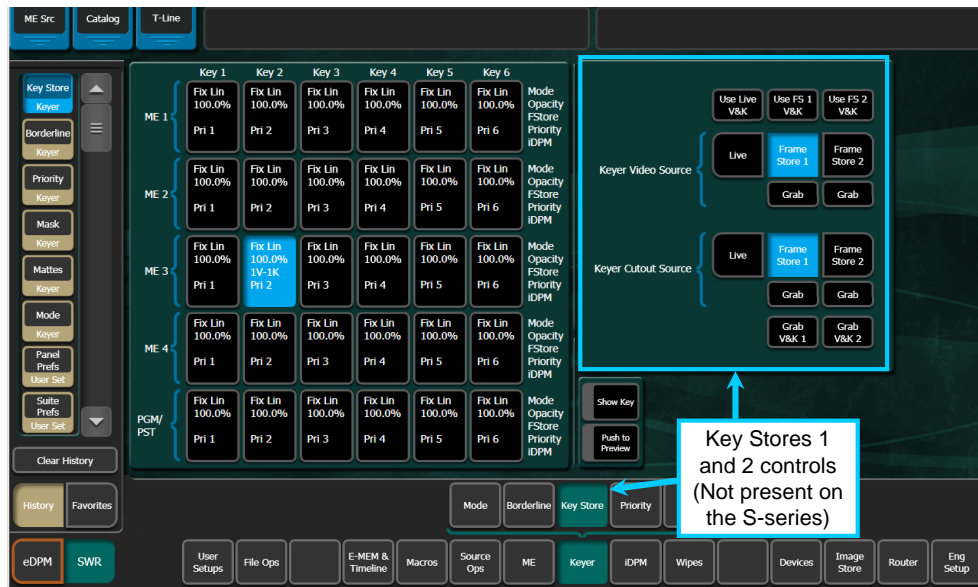


3-23


In the K-frame ALL Keyers have 2 Key Stores except for the K –Frame S-series and V-series, which has no Key Stores on any Keyers.

The Key 5 and 6 buttons will be missing from the menu.

ME – Keyers (S-series and V-series)

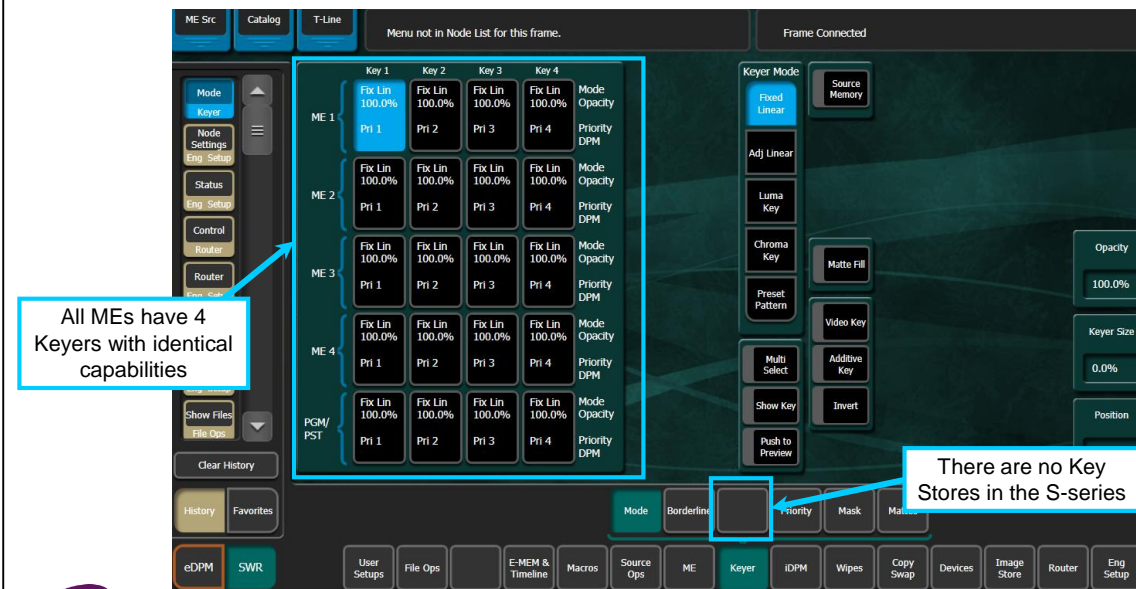


Source Ops - Source Rules

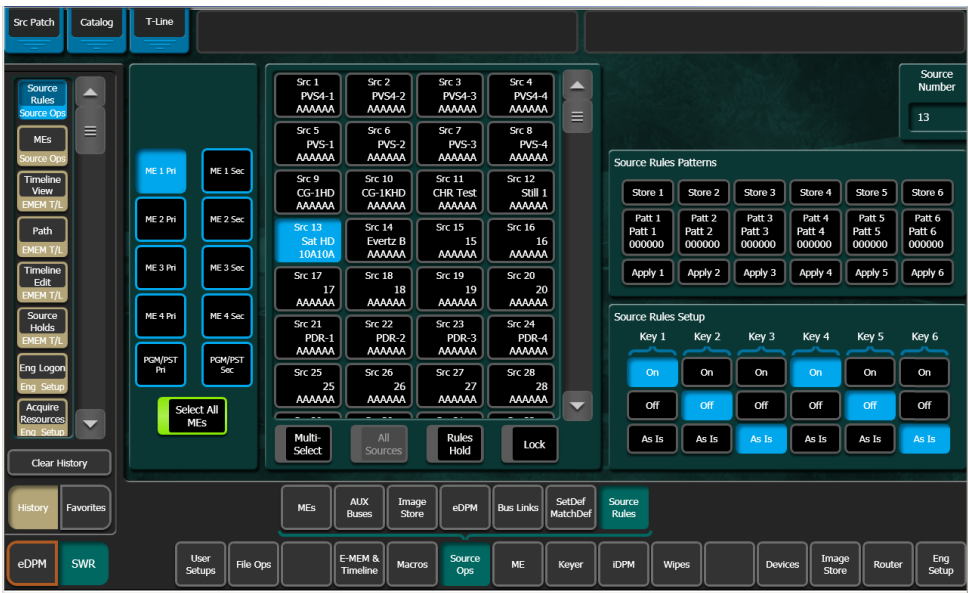

Source Rules showing Source 13 set to control keys 1, 2, 4 and 5.
Keyers 5 and 6 will be missing with K Frame S-series systems.

Keyer - Matte Menu (S-series and V-series)

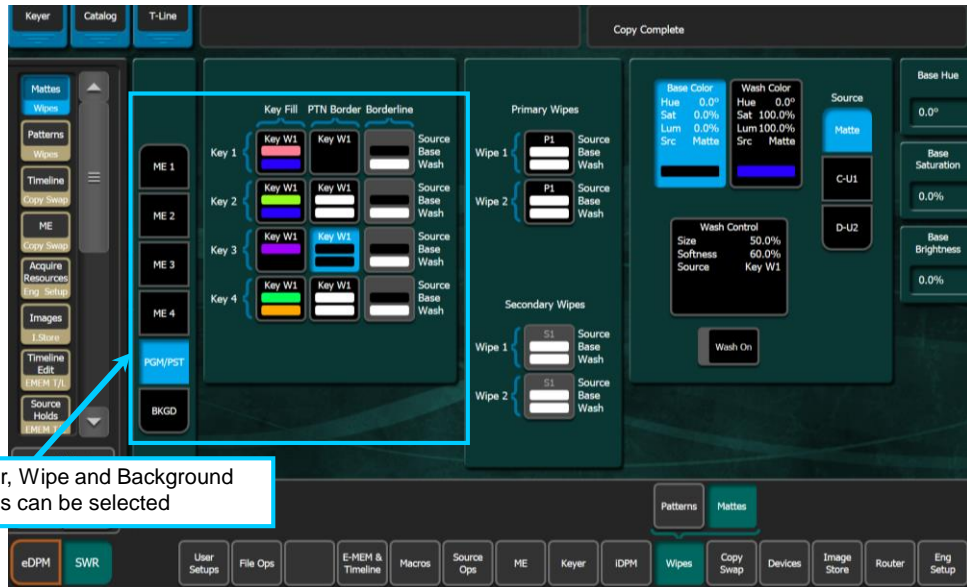

S-series Menu shown


3-26

Use Keyer - Matte (or Wipe – Matte) to access the Matte menu.

All Keyers in the K-Frame have all matte functionality – Pattern Borders and Borderline (if an iDPM is allocated to the Keyer).

Menu shows an S-Series with only 4 Keys.

Kayenne Multi Function Module - Wipes

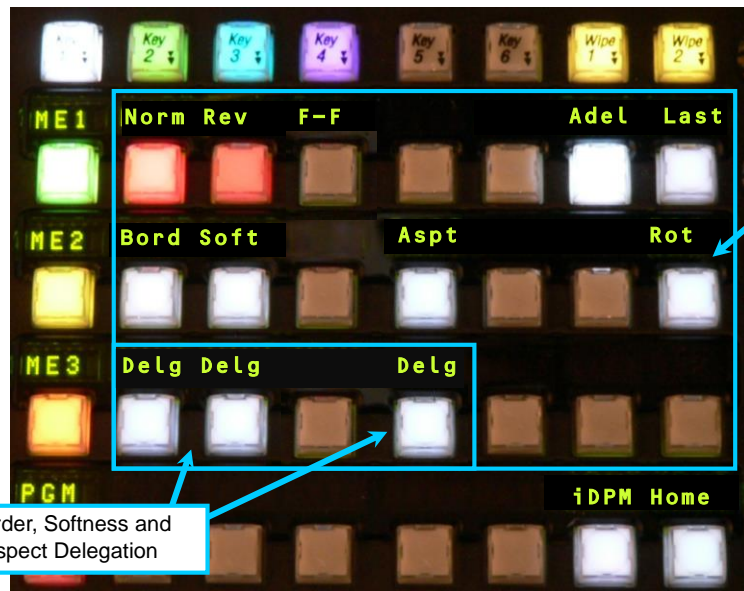


S-Series example shown

3-27

One Example of the Multi Function Module showing Wipe controls available.
Home returns to the Top Menu.

Wipe Menu

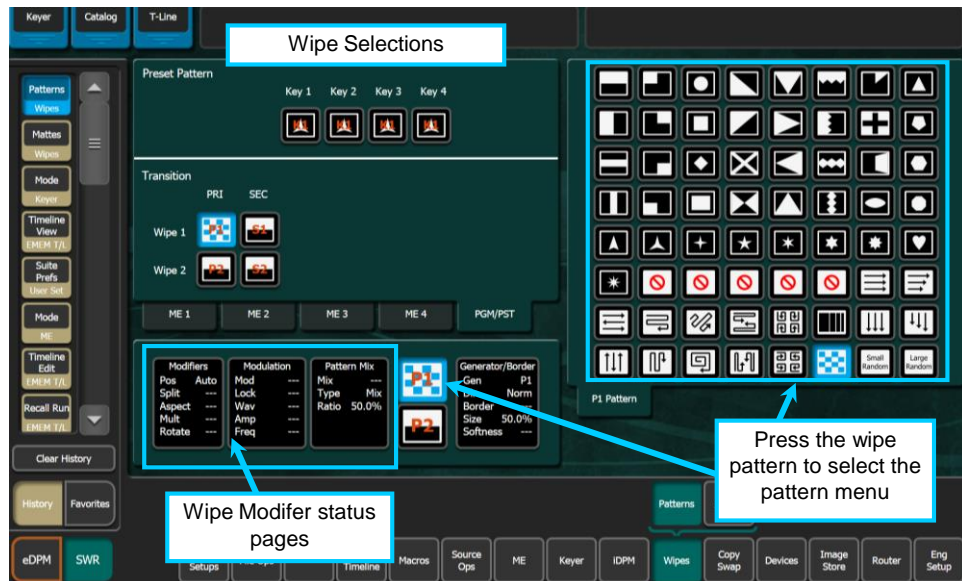

S-Series Menu shown

3-28

Full MEs have 2 Main Wipes on Primary (P1, P2) and Secondary (S1, S2) plus Keyer wipes on Keyers 1,2,3 and 4

Keyer wipes have some limited capabilities.

E-MEM Operations

- Each E-MEM level has 1000 E-MEM registers (000 - 999)
- These are split into Pages, Banks and Registers
- E-MEMs have Effect recall, Effects Dissolve, Sequence and Timeline Run control
- Timelines have to be build in the Master E-MEM panel or in the menu
- 1 button recalls can be performed within any bank
 - If you are in Page 0, Bank 5, pressing '6' recalls 056
- 3 button recalls can be performed with any page
 - If you are in Page 200, pressing 'Bank', '3', '6' recalls 236
- 5 button recalls can be performed to go to any register
 - Press 'Page', '4', 'Bank', '8', '2' - for register 482



3-29


E-MEM, Effects Memory allows the state of the selected parts of the switcher to be stored into a storage location or 'Register'

It has been designed for easy and fast operation. If working within a page and a bank only 2 button presses are required: Learn and the register number.

Recalls are even easier, simply press the register number!

Changing banks requires additional button presses but often staying within a few banks is all that is needed. Dedicated bank buttons are provided for the bottom 4 banks (0-3), double pressing these buttons selects the shifted bank number (4-7). This expands the learn to 80 registers with only 3 buttons to Learn or 2 for Recall operations.

Kayenne Local ME E-MEM Module

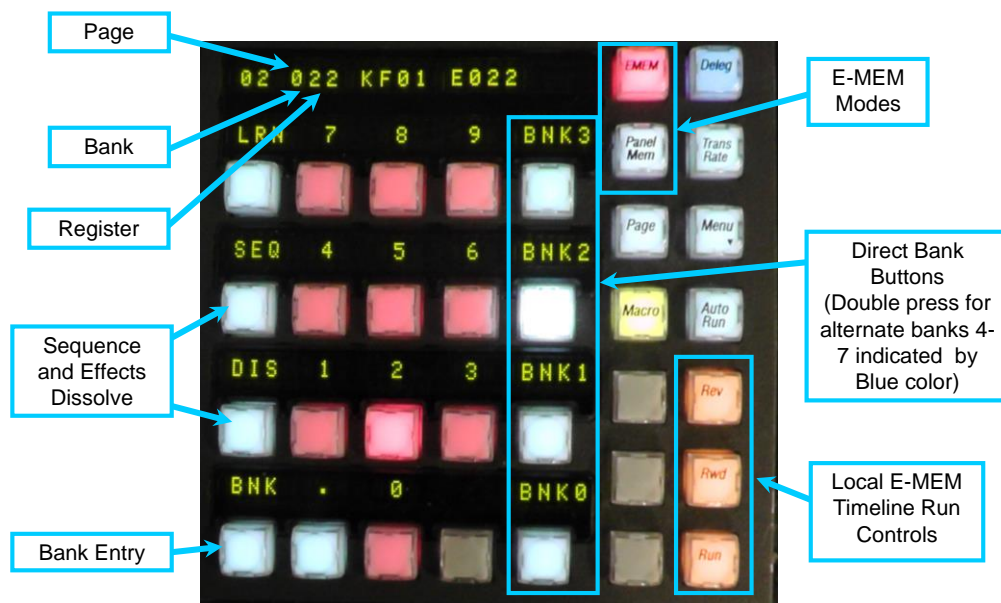

3-30

The Local E-MEM panel controls the same local ME status and any parameters assigned to the local E-MEM under the User Setups/ Suite Prefs/ E-MEM prefs menu.

The Local E-MEM effects are the same as those controlled by the Master E-MEM.

Karrera Local ME E-MEM Module




3-31

The local E-MEM panel has various modes. These are:

- Local E-MEM learn and Recall mode.
- The local E-MEM has 1000 registers designated as Page #, Bank # and Register #. (Sometimes simply referred to as register # 435)
- Effect run controls allow for direct control of Run, Auto Run, Rev and Rewind of timeline effects built in Master E-MEM.
- Accessed by pressing “Menu”:
 - Panel Stripe delegation
 - Panel Memory control
 - Macro Recall Mode
 - Network Addressing
 - Calibration Routines
 - Transition Rate control for the main and Key transitions.
 - Page entry when in E-MEM or Macro mode

Kayenne Master E-MEM Module

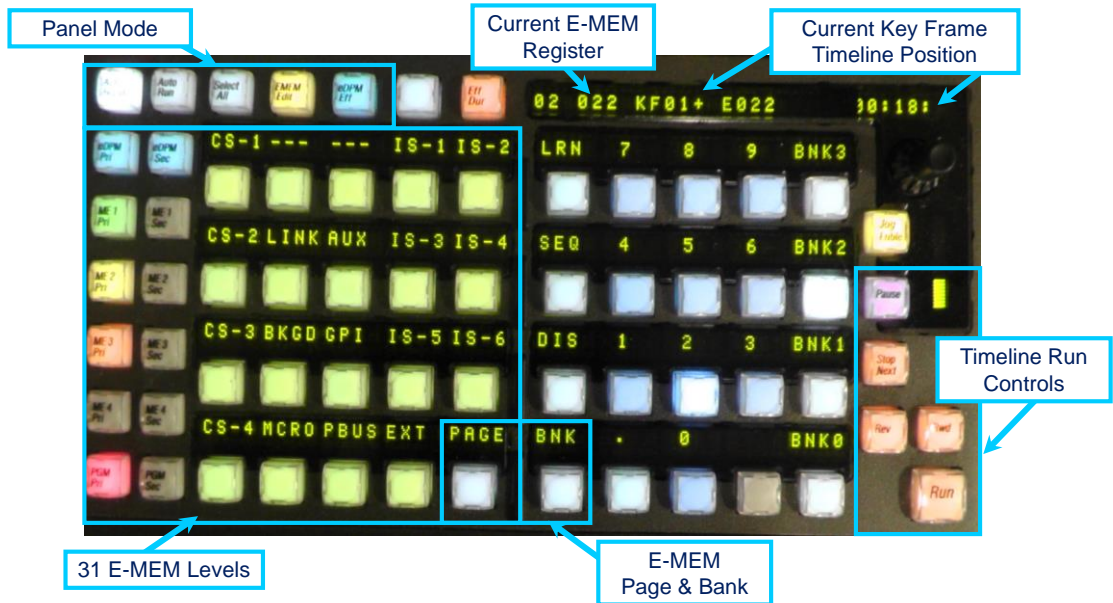

3-32

The 31 E-MEM Level buttons allow the various parts of the switcher to be controlled together in any combination (Auto Recall mode) or individually.

The ME buttons are dedicated to control the ME Primary and Secondary functions.

The yellow Miscellaneous buttons are definable and can be modified through the Daily Setup, Suite Prefs, E-MEM Prefs menu.


The Miscellaneous button labels can also be changed.

Each switcher Level has 1000 E-MEM registers split into Page, Bank and Register.

Effect run controls allow for direct control of Run, Rev and Rewind operations on an effect.

A Stop Next (Keyframe) button, Pause button and jog knob are provide to aide in building effects.

Karrera Master E-MEM Module

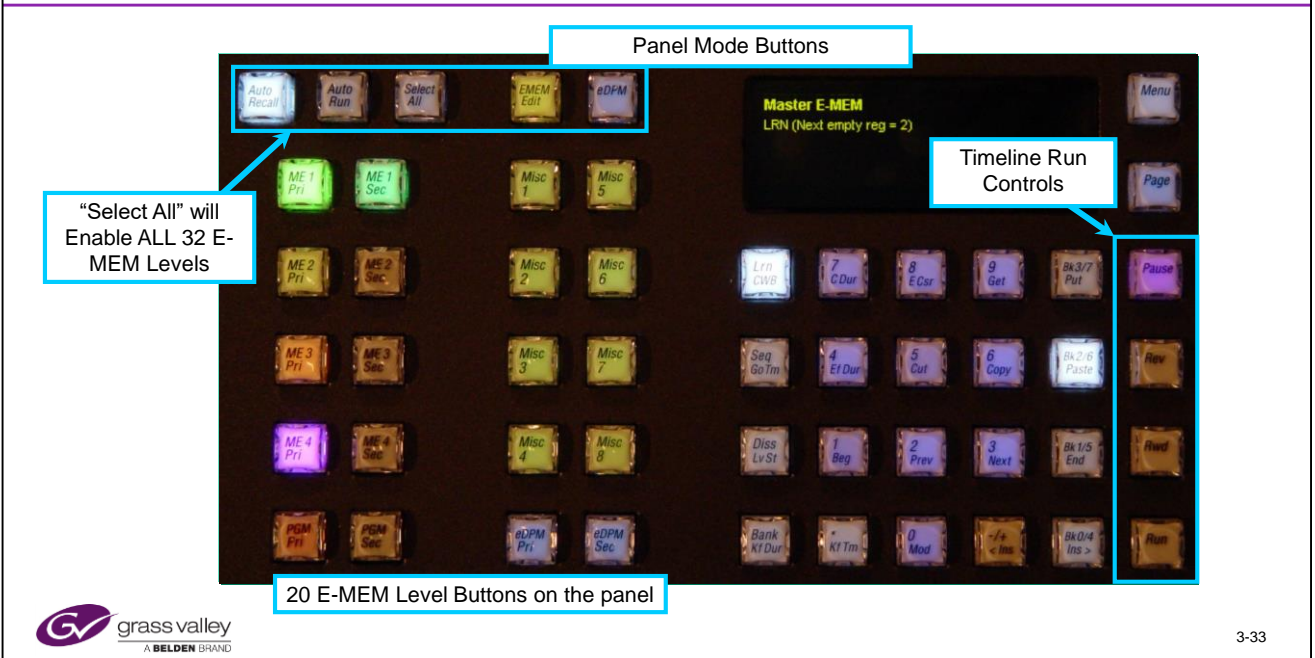

The 20 E-MEM Level buttons allow the various parts of the switcher to be controlled together in any combination (Auto Recall mode) or individually.

'Select All' selects ALL 31 levels. Those not on the panel can be enabled or disabled from the menu.

The ME buttons are dedicated to control the ME Primary and Secondary functions.

The yellow Miscellaneous buttons are definable and can be modified through the Daily Setup, Suite Prefs, E-MEM Prefs menu.

The Miscellaneous button labels can also be changed.

Each switcher Level has 1000 E-MEM registers split into Page, Bank and Register.

Effect run controls allow for direct control of Run, Rev and Rewind operations on an effect.

A Stop Next (Keyframe) button, Pause button and jog knob are provide to aide in building effects.

GV Korona Panel – Master E-MEM Panel

Master E-MEM area


2 - USB 3 ports

Auto Recall
eDPM Mode
E-MEM Edit

Standard Kayenne Master
E-MEM keypad

Level selections for
3 fixed ME levels
ME 1, 2 and PGM
eDPM

Miscellaneous Levels 1-6

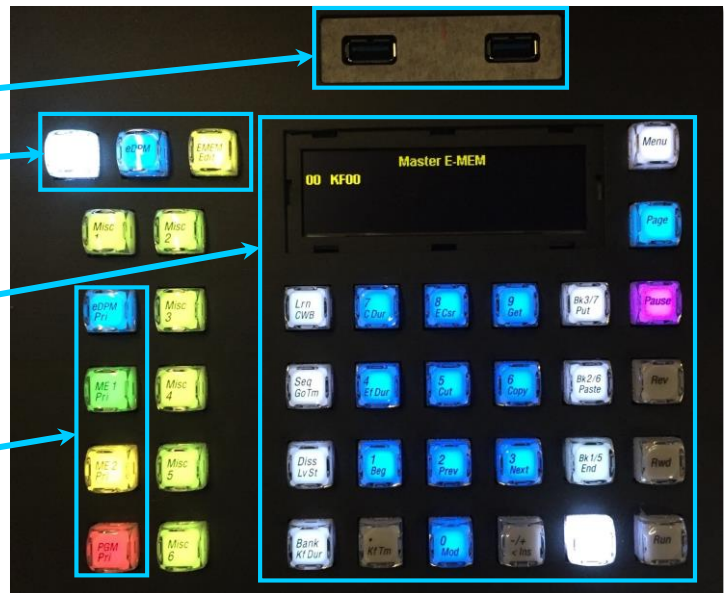


3-34

The GV Korona Master E-MEM panel has 3 dedicated ME buttons for ME 1, ME 2 and PGM.

It has an eDPM button and 6 Misc level buttons 1-6)

Suite Prefs - E-MEM Prefs

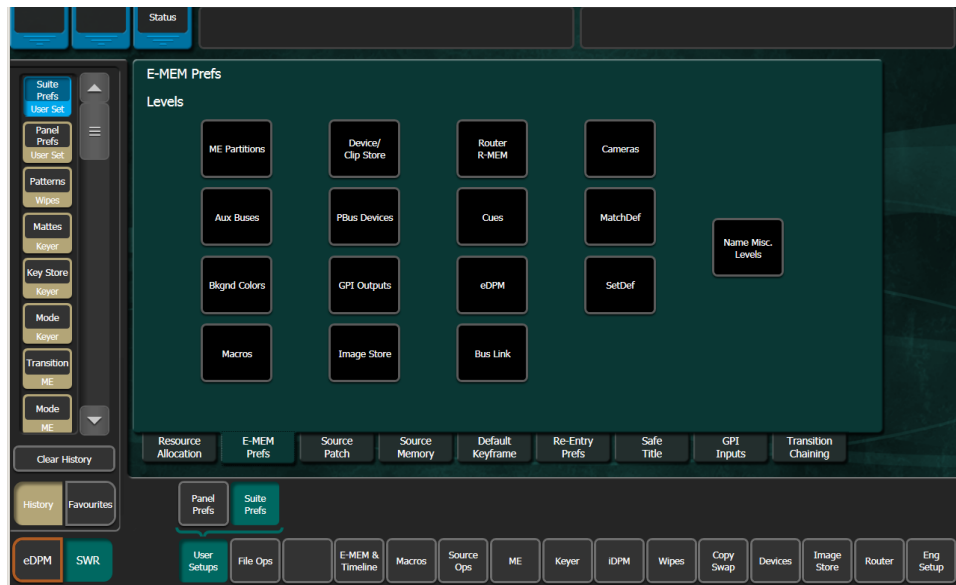

3-35

E-MEM Prefs allows the different switcher areas to be assigned to the E-MEM levels.

Each level can be named. (4 char)


K-Frame does not provide E-MEM control of the Set Def and Match Def features.

New E-MEM Prefs Defaults

The Default Master E-MEM Level Assignments have been changed in v11.1

This is to make the defaults more useful for the Karrera and GV Korona panel Master E-MEM buttons

Customer who update to version 11.1 will not see any difference IF they load their previous User Setup/Suite Preference File

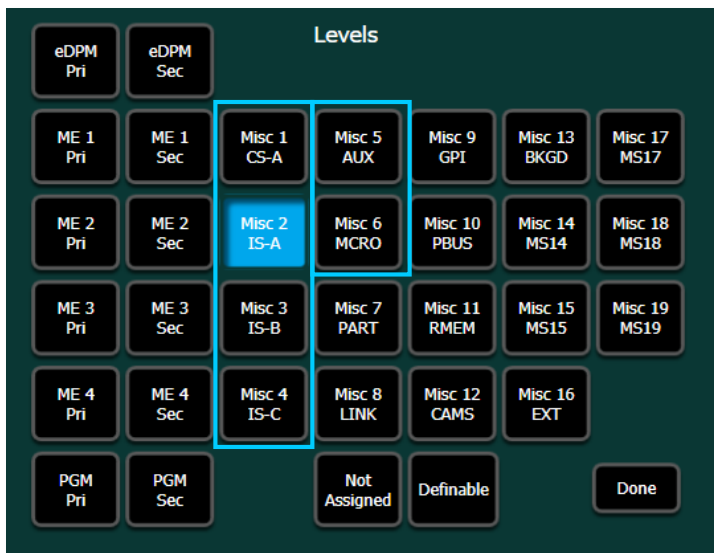

3-36


The standard E-MEM level assignment defaults has been changed.

This now provides more useful functionality for the GV Korona and Karrera panel Master E-MEM buttons.

If loaded into an existing system simply reload the earlier Suite Preference file to restore the prior defaults.

As in all systems the E-MEM level names and what is assigned to each button for level control can be changed in the Suite Preference, E-ME Prefs menu.

Suite Prefs - E-MEM Prefs - Image Store

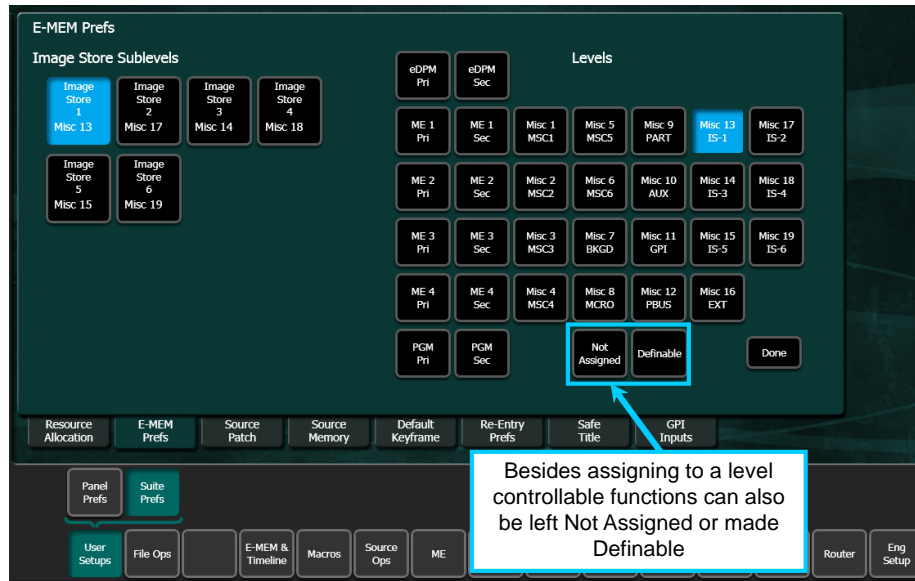


3-37

E-MEM control can be assigned to any Level button, left 'Not Assigned' to an E-MEM level or made 'Definable'.

'Definable' allows the control to be defined in the E-MEM Timeline menu.

Suite Prefs - E-MEM Prefs v11.0 - Image Store

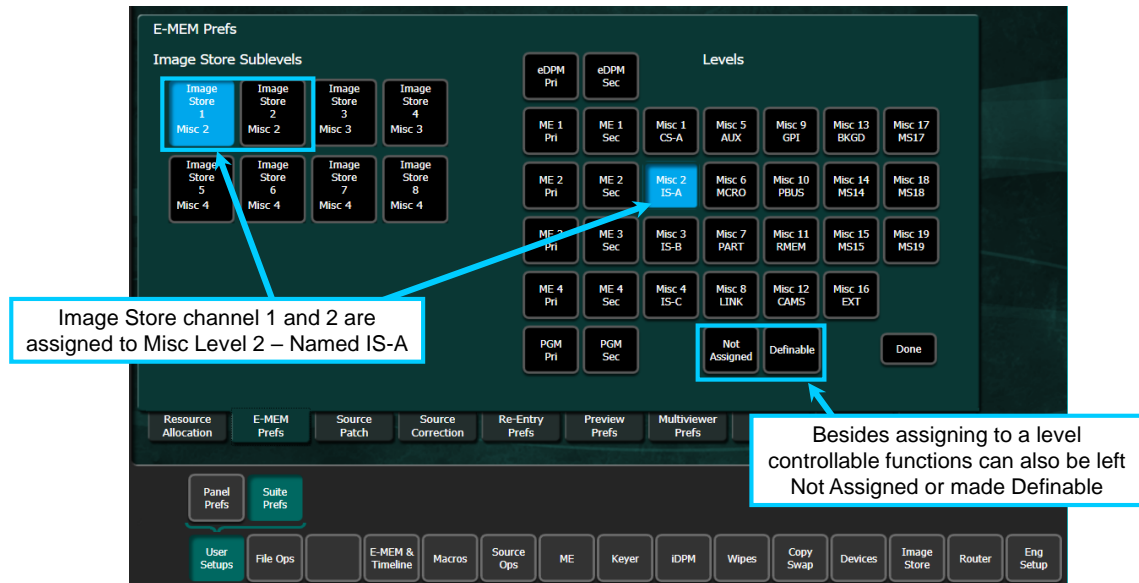

grass valley
A BELDEN BRAND

3-38


E-MEM control can be assigned to any Level button, left 'Not Assigned' to an E-MEM level or made 'Definable'.

Definable allows the control to be defined in the E-MEM Timeline menu.

Note the current assignments of the other Image Store Channels.

The GV Default assignments changed in version 11.0 to accommodate the GV Korona panel.


E-MEM Recall and Run

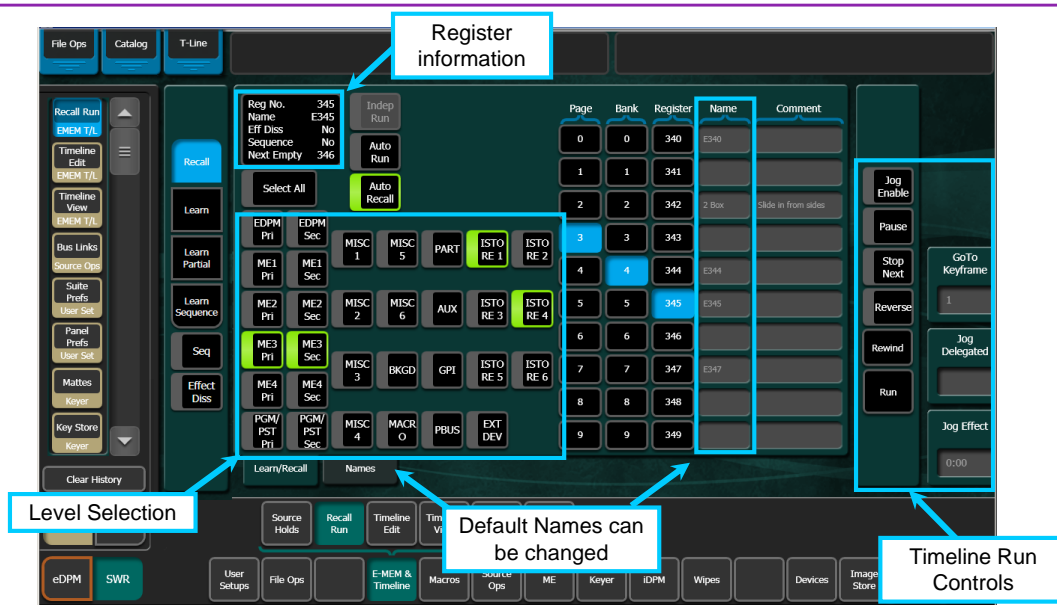

The Recall Run menu provides similar functions to the Master E-MEM panel showing all 31 Level Enables.

Effects can also be named and commented on.


ME - Modes

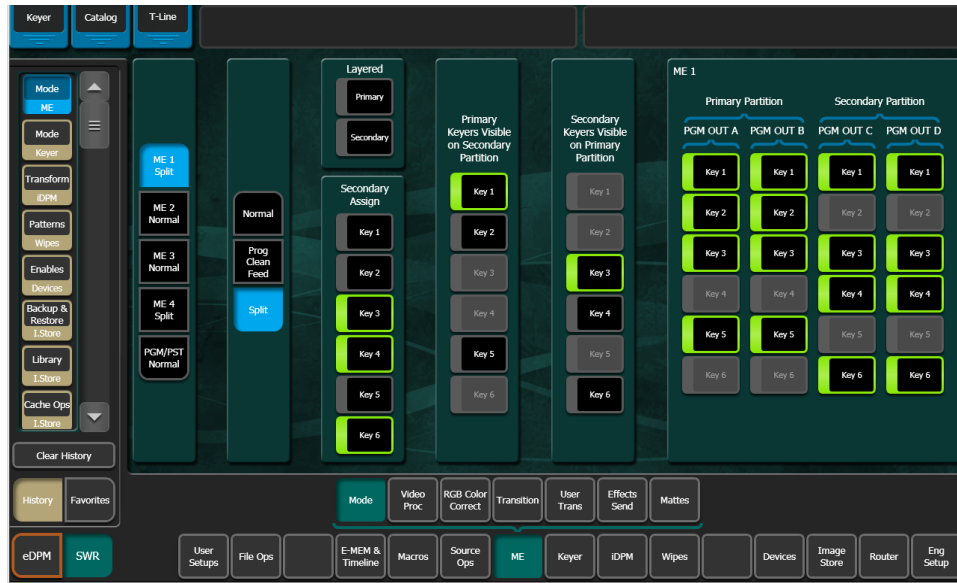

3-40

ME mode showing the ME1 Partition set for Split mode with 3 Key assignments controlled by the Secondary MEs E-MEM..

E-MEM and Timeline Edit

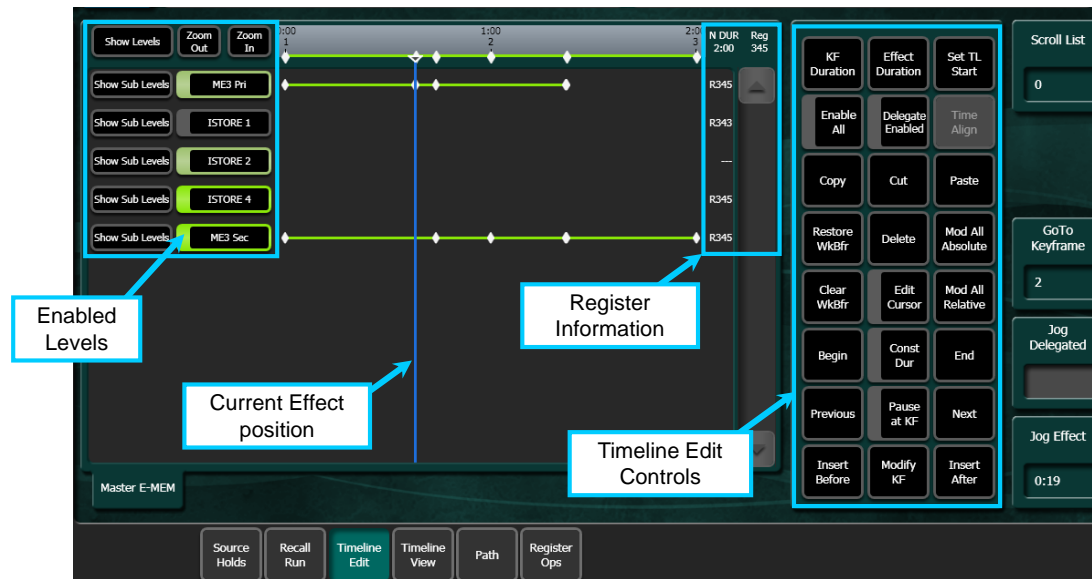


3-41

E-MEM and Timeline Menu showing Timeline Edit page and Sub levels

This is shown as an example only, for a complete discussion of switcher operations refer to the manual or attend a formal operations course.

Kayenne Master E-MEM Timeline Edit

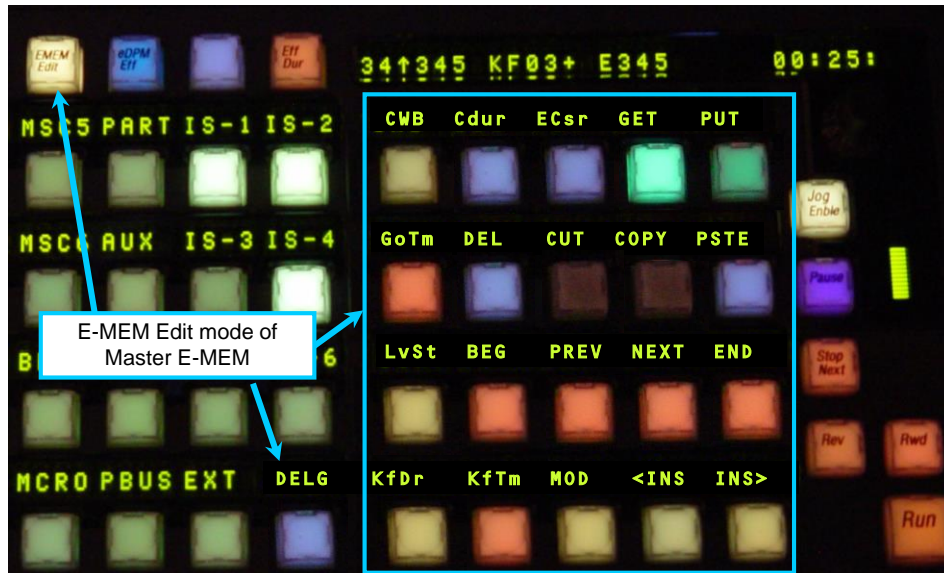

3-42

CWB = Clear Working Buffer – Clears the enabled E-MEM levels to the Default Keyframe state.

Orange buttons are navigation (BEG, Prv, Nxt, End, Go to KF, Go to Time, KF time and Level Start) Orange is also used for KF Duration and Effect Duration

Yellow buttons are editing (Mod, Insert Before, Insert After)


Green is used for Cursor control (Constant Duration, Time Cursor and Edit Cursor)

Blue is used for Cut, Copy, Paste and Delete.

Blue is also used for Delegate mode.

Display shows dissimilar registers (Up Arrow) and position between KFs (+)

E-MEM and Timeline Edit

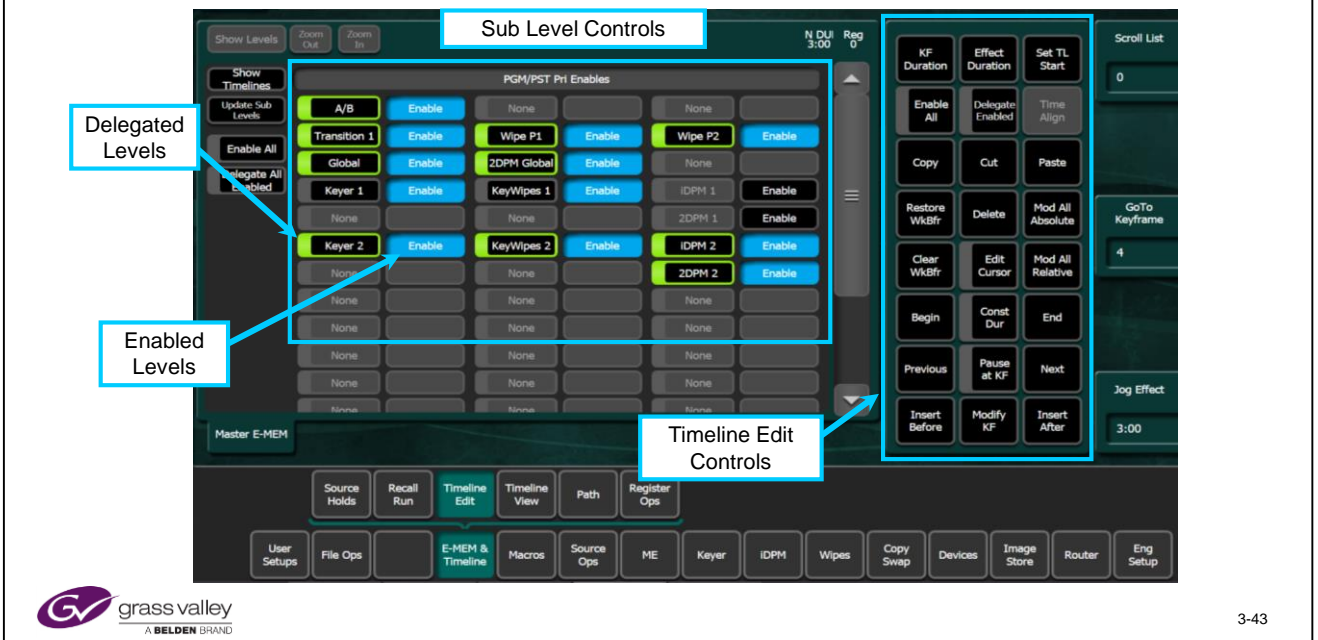

E-MEM and Timeline Menu showing Timeline Edit page showing Level Enables

E-MEM and Timeline Edit – v8.0

The screenshot displays the E-MEM and Timeline Edit interface. It features a grid of controls for various levels (ME1, ME2, ME3, ME4, PGM) and their sub-levels. The interface includes a 'Define E-MEM Enable Status' section with 'Update Levels' and 'EDPM Pri'/'EDPM Sec' buttons. A 'Primary assignment are white - Secondary assignments in green' callout points to the 'ME3 Pri' and 'ME3 Sec' sections. A 'Level Enables' callout points to the 'ME1 Pri' and 'ME1 Sec' sections. A 'Sub Level Enables' callout points to the 'ME2 Pri' and 'ME2 Sec' sections. An 'Additional Level Assignments' callout points to the 'ME3 Part' and 'ME3 Sec' sections. A callout with an arrow indicates more than 6 assignments: Primary > White, Secondary > green. The bottom of the interface shows a menu with 'Source', 'Rec', 'Timeline Edit', 'Timeline View', 'E-MEM & Timeline', 'Macros', 'Source Ops', 'ME', 'Keyer', 'IDPM', 'Wipes', 'Copy Swap', 'Devices', 'Image Store', 'Router', and 'Eng Setup'.

Level Enables

Sub Level Enables

Additional Level Assignments

Primary assignment are white - Secondary assignments in green

Arrow indicates more than 6 assignments: Primary > White
Secondary > green

grass valley
A BELDEN BRAND


3-44

E-MEM Timeline View Menu showing Level Overview page showing Level Enables.

The White (or Green) Arrows indicate if more that 6 assignable levels have been assigned to an ME.

The arrows also indicates if a Definable sub level has been Enabled.


E-MEM and Timeline

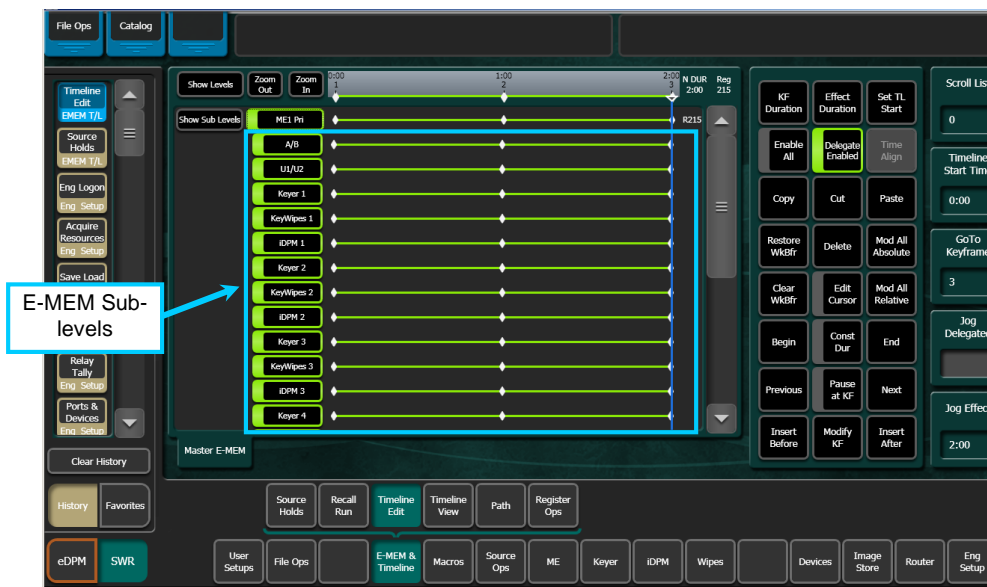

3-45

E-MEM and Timeline Menu showing Timeline Edit page and Sub levels.


MFM - Transform Home Page

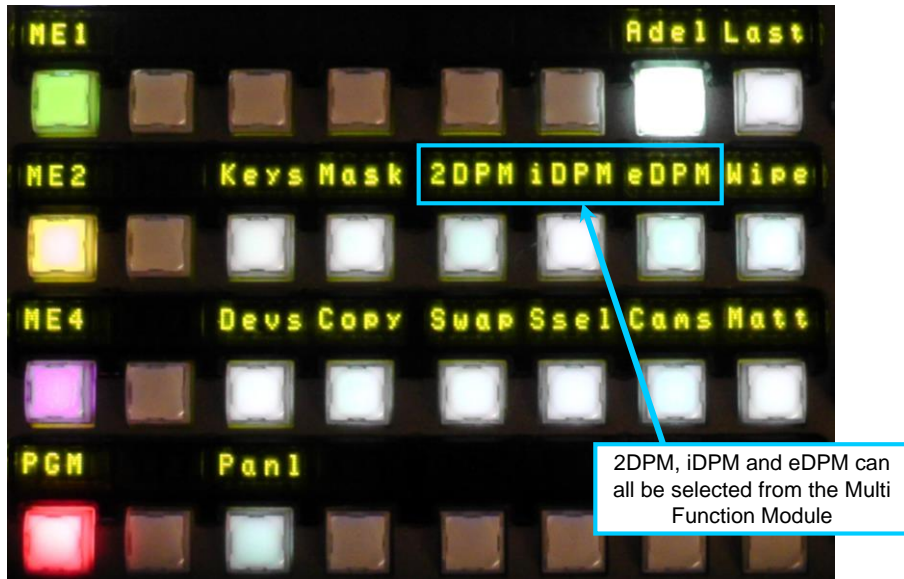

3-46


Multi Function Module showing the different DPM selections..

2D DPM - Transform Menu

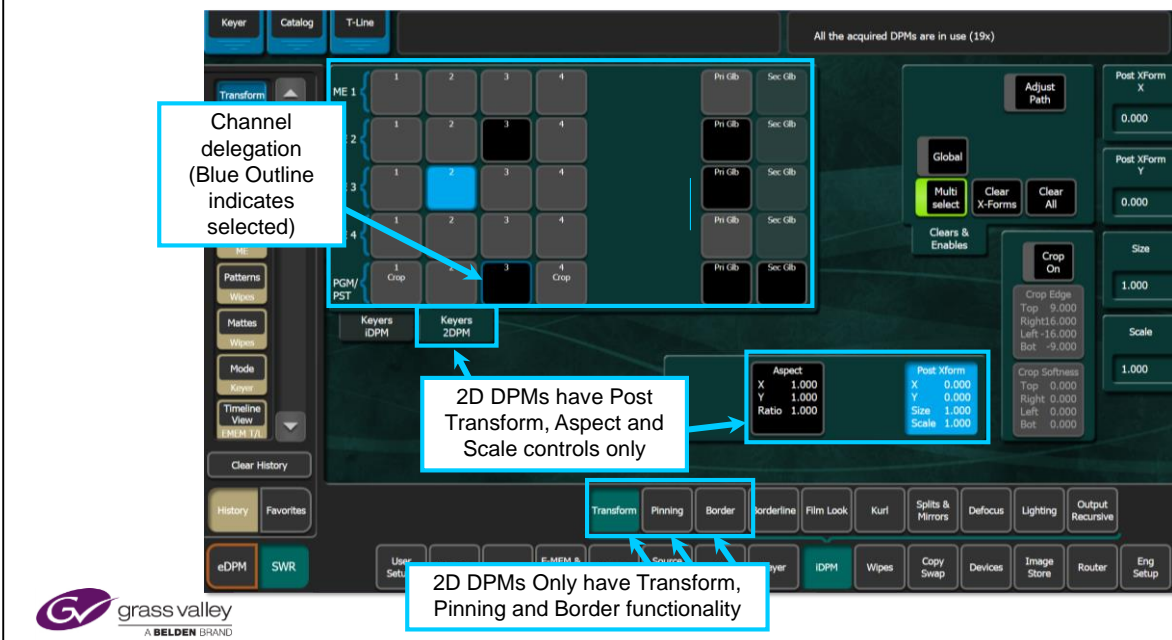

iDPM menu showing Transform sub menu and channel delegation.
Double click a channel to turn it on.

2D DPM - Transform Menu - v8.0

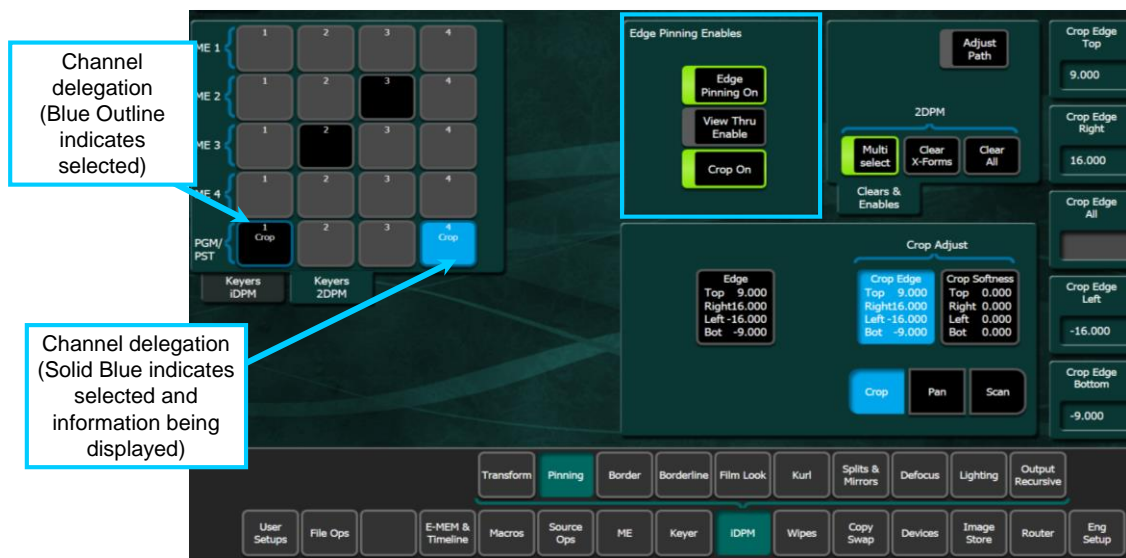


S-series Menu shown

3-48


2DPM menu showing Edge Pinning menu.

iDPM - Transform Menu

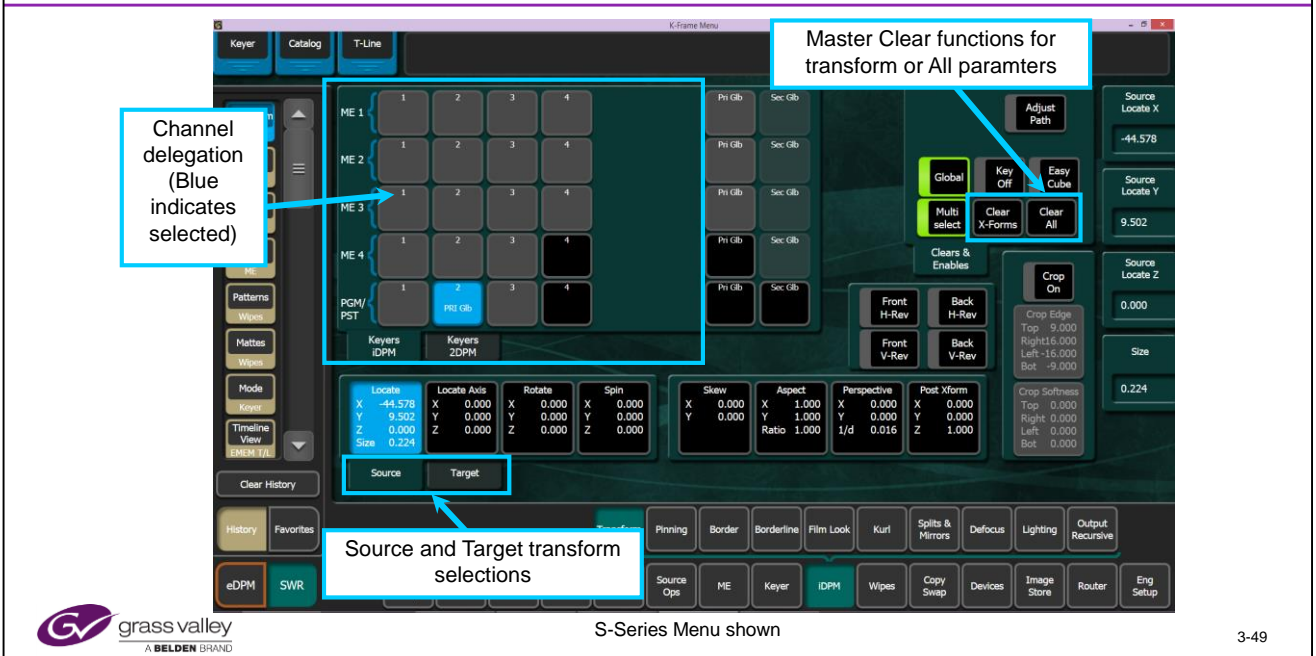

iDPM menu showing Transform sub menu and channel delegation.
Double click a channel to turn it on

ME - Effects Send

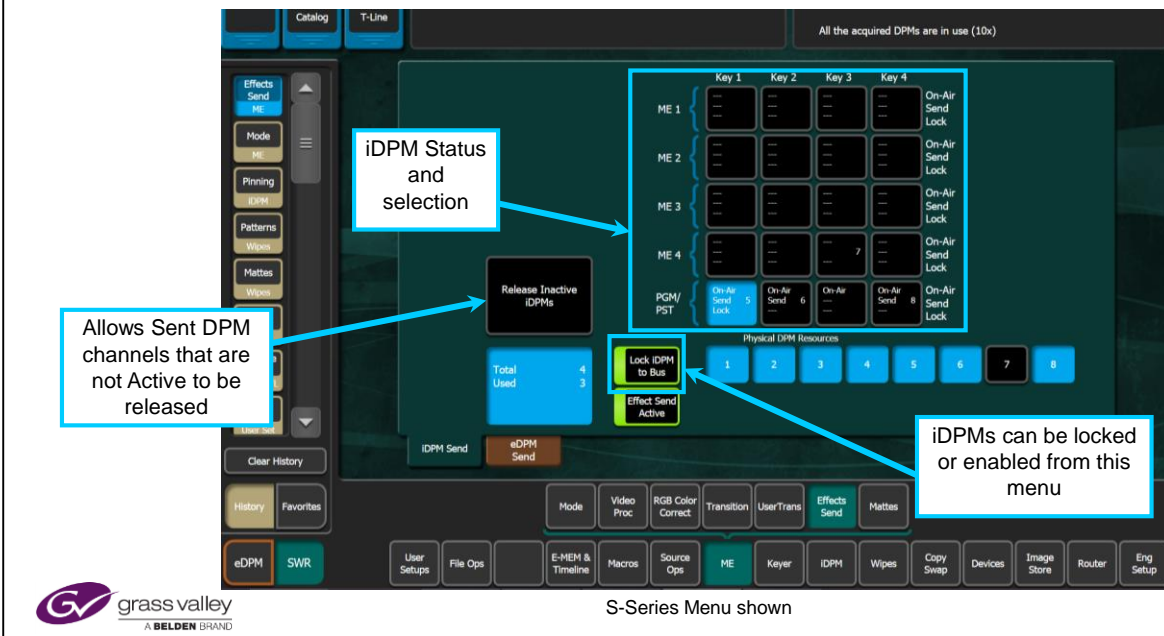

iDPMs are normally enabled from the Keyer or iDPM mode of the MFM.

This menu allows an operator to lock iDPMs to specific Keyers. This is useful if all of the iDPMs are not optioned and where there are not enough iDPMs for all Keyers.


Kayenne iDPM - Transform




3-51

Multi Function Module showing iDPM controls. Source and Target modes have different colors. Magenta for Source, Green for Target.


Locate and Axis Parameters - Screen Units

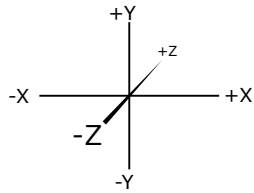

- X = Horizontal Axis, Left to Right
- Y = Vertical Axis, Top to Bottom
- Z = Depth Axis, Front to Back

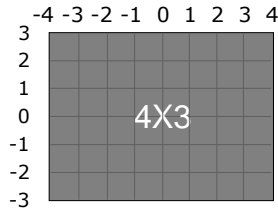

- X: Left edge = -4, Right edge = +4
- Y: Top = +3, Bottom = -3
- Z: (+) (CCW) Away from viewpoint to ∞ , (-) (CW) Toward the viewpoint = -16.67

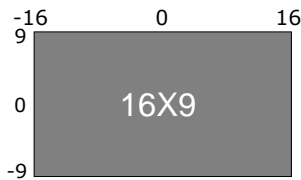

- X: Left edge = -16, Right edge = +16
- Y: Top = +9, Bottom = -9
- Z: (+) (CCW) Away from viewpoint, (-) (CW) Toward the viewpoint



grass valley
A BELDEN BRAND

3-52

iDPM Screen Units:

- Standard Definition screens (4:3 aspect ratio) are commonly divided into screen units based on the horizontal axis of minus 4 to plus 4 and the vertical axis divided into minus 3 to plus 3.
- High Definition and Standard Definition wide screen (16:9 aspect ratio) screens are divided the same way but with plus and minus 16 screen units horizontal and plus and minus 9 screen units in the vertical axis.
- The Z axis works the same for both SD and HD. At the plane of the screen, the Z axis value is 0 (zero). Transforming the image toward you from the screen is moving the image in the minus direction. Moving the image away from you and making it look smaller is moving in the plus direction.
- Even though the image looks smaller as you move it in the +Z axis, in video reality it is actually the same size as it was when the Z axis value was 0.
- Z Axis locate moves the image toward you or away from you but does not change the actual "size". This is like standing next to a train car on the track. It looks quite large. But when that same train car has moved 100 feet down the track, it appears smaller. The car has not changed in size.
- The "Size" function changes the actual size of the image, shrinking it or growing it.