



BTR-800 Base Station Back

TR-800 Metal Beltpack Transceiver

Overall

RF Frequency Range:	518 – 608 MHz, 614 – 740 MHz in 18 MHz TX and RX bands
Power Requirements:	6 "AA" Cells Alkaline (NiMH optional)
Current Draw:	140 mA (Push-to-Talk, Talk On)
Temperature Range:	-4°F to 130°F (-20°C to 55°C)
Dimensions:	3.75" W × 5.05" H × 1.65" D (9.5 cm × 12.8 cm × 4.2 cm)
Weight:	16 oz. (454 g) with alkaline batteries
Transmit Antenna:	1/4 Wave (supplied), Screw type
Receive Antenna:	1/4 Wave (supplied), Screw type
FCC ID:	B5DM515
Frequency Response:	300-8 KHz
Microphone Input Sensitivity:	7 mV
Local Headset Output:	40 mV output into 600 Ω (1% distortion)

Transmitter

Type:	Synthesized, 720 channels
Transmit Power:	50 mW Max. (Auto-power reduction when close to base)
Modulation Type:	FM
Deviation:	40 KHz
RF Frequency Stability:	0.005%
Modulation Limiter:	Peak-Responding Compressor
Radiated Harmonics & Spurious:	Exceeds FCC specifications

Receiver

Type:	Dual Conversion Superheterodyne, Synthesized, FM, 720 channels
RF Sensitivity:	<0.7 uV for 12 dB SINAD
Squelch Threshold:	20 dB SINAD (About 1.0 uV)
IF Selectivity:	3 dB at 230 KHz
Image Rejection:	70 dB or better
Squelch Quieting:	90 dB
RF Frequency Stability:	0.005%
Distortion:	<1% at full deviation

Ordering Information

Model No.	Description	Order by Cat.
BTR-800	AudioCom Version Base Transceiver	71305C6
TR-800	AudioCom Version Beltpack Transceiver	71306C6
BTR-800	RTS Version Base Transceiver	71305C6R
TR-800	RTS Version Beltpack Transceiver	71306C6R
BTR-800	RTS 5-Pin Version Base Transceiver	71305C6R5
TR-800	RTS 5-Pin Version Beltpack Transceiver	71306C6R5

All specifications are subject to change without notice.

Telex Communications, Inc.  
12000 Portland Avenue South  
Burnsville, MN 55337  
1-800-392-3497  
www.telex.com

All trademarks are the property of their respective owners.

BTR-800 Base Station Transceiver

Overall

RF Frequency Range:	518 – 608 MHz, 614 – 740 MHz in 18 MHz TX and RX bands
Power Requirement:	100-240 VAC, 50 - 60 Hz, IEC receptacle
Temp Range:	-4°F to 130°F (-20°C to 55°C)
Dimensions:	19.00" W × 1.72" H × 14.00" D (48.3 cm × 4.4 cm × 35.6 cm)
Weight:	7 lbs. 2 oz. (3.24 kg)
Transmit Antenna:	1/2 Wave (supplied) TNC Male Connector
Receive Antenna:	1/2 Wave (supplied) TNC Male Connector
FCC ID:	B5DM514
Frequency Response:	300-8 KHz
Four Wire Input:	Level Adjustable (2 Vrms typical)
Four Wire Output:	Level Adjustable (2 Vrms typical)
Telex® Intercom:	Input/Output Level Adjustable (1 Vrms typical), Line Impedance 300 Ω
RTS® Intercom:	Input/Output Level Adjustable (0.775 Vrms typical), Line Impedance 200 Ω
ClearCom® Intercom:	Input/Output Level Adjustable (1 Vrms typical), Line Impedance 200 Ω
Auxiliary Input:	Adjustable (2 Vrms typical)
Auxiliary Output:	Adjustable (2 Vrms typical into 600 Ω)
Stage Announce Output:	Internally Adjustable (1Vrms typical at rated deviation into 100 KΩ)
Stage Announce Relay:	Dry contact, rated at 1Amp, 24 V Max.
Microphone Input Sensitivity:	9 mV
Local Headset Output:	40 mW output into 600 Ω (1% Distortion)

Transmitter

Type:	Synthesized, 720 channels
Transmit Power:	100 mW Max. (High), 10 mW (Normal)
Modulation Type:	FM
Deviation:	40 KHz
RF Frequency Stability:	0.005%
Modulation Limiter:	Peak-Responding Compressor
Radiated Harmonics & Spurious:	Exceeds FCC specifications

Receiver

Type:	Dual Conversion Superheterodyne, Synthesized, FM, 720 channels
RF Sensitivity:	<0.7 uV for 12 dB SINAD
Squelch Threshold:	20dB SINAD (About 1.0uV)
IF Selectivity:	3 dB at 230 KHz
Image Rejection:	70 dB or better
Squelch Quieting:	90 dB
RF Frequency Stability:	0.005%
Distortion:	<1% at full deviation

Distributed by:

BTR800

RadioCom™

2-Channel UHF Fully User Synthesized Wireless Intercom

wireless that works™



The most versatile wireless intercom ever!

# BTR 800

frequency agile

1440 selectable frequencies

2 independent intercom channels

ClearScan™ auto frequency selection

stage announce output with relay closure


wireless talk around (broadcast ISO)

4 beltacks per base station

cast magnesium beltacks

and so much more

Screen sample of BTR-800 graphical user interface

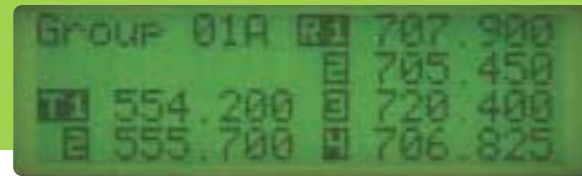

The new Telex® RadioCom™ BTR-800 UHF wireless intercom is truly different. The 800 offers a list of standard features that is unparalleled in the industry and will change the way wireless intercom is done forever. Features like full UHF operation, two intercom channel access from each beltack, stage announce output with relay closure, wireless talk around (ISO), Enhanced ClearScan™, talk/listen headset station at the base, and much, much more. Combine all of that with an easy-to-use graphical user interface that lets you get started right out of the box, and you've got the most innovative and versatile wireless intercom ever made. But features aren't the only story. The BTR-800 wireless intercom is a serious performer too. With technology leaps like Intelligent Power Control™, combination tone code/RF noise squelch and DSP digital audio processing, this is one wireless intercom that sounds great, even at a great distance! If your application requires the highest performance and utmost reliability, you need the new Telex RadioCom BTR-800 wireless intercom system.

RadioCom, wireless that works!™



BTR-800 battery charger

## 2-Channel UHF Fully User Synthesized Wireless Intercom

- **Four beltacks per base station.** Each BTR-800 base station can support up to four TR-800 wireless beltacks in fulltime transmit, full duplex operation. Multiple base station/beltacks systems can be used together to meet the needs of virtually any wireless communications application.
- **Frequency agile.** Choose from 1440 user selectable frequencies using the 800's new revolutionary graphical user interface. Frequencies can be selected from groups of intermod free choices, or any frequency in 25 KHz increments. Select from 720 TX and 720 RX frequencies each from independent 18 MHz operational windows.
- **UHF operation.** Both the BTR-800 and the TR-800s operate in the UHF band from 518 to 740 MHz. Bases and beltacks operate in specific 18 MHz operational bands. Contact Telex customer service for complete operational band details.
- **Enhanced ClearScan™ frequency auto selection.** Frequency selection has never been easier! This is an advanced form of our existing ClearScan technology. It actually looks at all of the available frequencies in the pre-intermoded groups and ranks them so that the user knows the best frequencies to use. Now you can walk into a new venue in a new city and have a clear set of frequencies in less than a minute with the push of a couple of buttons!
- **Intermodulation-free factory selected groups.** Each 800 system comes with 24 factory selected, pre-intermoded groups that allow even the most uninitiated user to get started right out of the box. Telex has done all of the work for you!
- **Two-channel intercom access from each beltack.** Each TR-800 beltack in the system can select between two hardwired intercom channels. Channels are run to the BTR-800 base station and can be 2-wire, 4-wire or mixed. The BTR-800 is fully compatible with AudioCom®, RTS™ and Clear-Com® hardwired intercom systems.
- **Two great battery options.** TR-800 beltacks can be operated from standard Alkaline AA batteries that provide over 14 hours of continuous duty operation. For applications where rechargeable batteries are required optional NiMH battery packs are available. NiMH batteries do not develop harmful memories like NiCads and offer a full 12 hours of operation. Drop-in chargers are also available in single and four-gang configurations.
- **Stage Announce output with relay closure.** Each beltack can initiate the Stage Announce feature. The user's audio is routed out the back of the base station via a 3-pin XLR connector. The signal is dry, line level +8 dB and adjustable. A convenient relay closure is provided for triggering two-way radios, IFB sends, green-room speakers or any other closure activated device.
- **Wireless Talk Around (Broadcast ISO).** Each beltack can momentarily route its audio only to the other wireless beltacks on its current channel with the push of a button. The user's audio is lifted off of the intercom bus so that only the other wireless beltacks can hear. This is great for private conversations in the heat of battle.
- **"Fifth Person" Talk/Listen station at base.** The BTR-800 base station features a full talk/listen headset station so that an additional user can communicate on one, the other, or both intercom channels at once.
- **Intelligent Power Control™.** This new breakthrough technology takes system range and performance to a whole new level. Each beltack senses when it is close to the base station and intelligently reduces its output by 10 dB. This effectively eliminates overloading the base station receiver front end which is the primary cause for the "near – far" desensing problem experienced in other wireless intercoms.
- **Cast magnesium beltacks.** TR-800 beltacks are constructed of extremely light, strong and durable cast magnesium. That's the metal "mag" wheels are made from! Using magnesium substantially decreases the weight of the beltack while assuring the utmost ruggedness and durability.
- **Graphical user interface.** Both the BTR-800 and the TR-800 have easy to use user interfaces utilizing state of the art LCD displays. Custom graphical menus on the BTR-800 allow access to all of the powerful features and system operational parameters. The menu structure has been specifically designed to be intuitive and easy to use right out of the box.
- **Detachable beltack antennas.** TR-800 beltacks feature detachable antennas that utilize stud type threaded connectors that do not have a fragile center pin to break off or bend. Detachable antennas make storage or shipping a breeze.