SONY

HD CAMERA CONTROL UNIT

# HDCU3300

SD ENCODER UNIT
**HKCU1001**

MULTI INTERFACE UNIT
**HKCU1003**

SDI OUTPUT EXPANSION UNIT
**HKCU1005**

*HD SUPER MOTION*

*Digital HDVS*

MAINTENANCE MANUAL
1st Edition
Serial No. 10001 and Higher : HDCU3300 (UC)
Serial No. 30001 and Higher : HDCU3300 (J)
Serial No. 40001 and Higher : HDCU3300 (CE)

## ⚠警告

このマニュアルは，サービス専用です。
お客様が，このマニュアルに記載された設置や保守，点検，修理などを行うと感電や火災，人身事故につながることがあります。
危険をさけるため，サービストレーニングを受けた技術者のみご使用ください。

## ⚠ WARNING

This manual is intended for qualified service personnel only.
To reduce the risk of electric shock, fire or injury, do not perform any servicing other than that contained in the operating instructions unless you are qualified to do so. Refer all servicing to qualified service personnel.

## ⚠ WARNUNG

Die Anleitung ist nur für qualifiziertes Fachpersonal bestimmt.
Alle Wartungsarbeiten dürfen nur von qualifiziertem Fachpersonal ausgeführt werden. Um die Gefahr eines elektrischen Schlages, Feuergefahr und Verletzungen zu vermeiden, sind bei Wartungsarbeiten strikt die Angaben in der Anleitung zu befolgen. Andere als die angegeben Wartungsarbeiten dürfen nur von Personen ausgeführt werden, die eine spezielle Befähigung dazu besitzen.

## ⚠ AVERTISSEMENT

Ce manual est destiné uniquement aux personnes compétentes en charge de l'entretien. Afin de réduire les risques de décharge électrique, d'incendie ou de blessure n'effectuer que les réparations indiquées dans le mode d'emploi à moins d'être qualifié pour en effectuer d'autres. Pour toute réparation faire appel à une personne compétente uniquement.

**CAUTION**

Use of controls or adjustments or performance of procedures other than those specified herein may result in hazardous radiation exposure.

**CAUTION**

The use of optical instruments with this product will increase eye hazard.

CLASS 1 LASER PRODUCT
LASER KLASSE 1 PRODUKT
LUOKAN 1 LASERLAITE
KLASS 1 LASER APPARAT

This HD camera control unit is classified as a CLASS 1 LASER PRODUCT.

安全のために，周辺機器を接続する際は，過大電圧を持つ可能性があるコネクターを以下のポートに接続しないでください。
: Ethernet　コネクター
上記のポートについては本書の指示に従ってください。

For safety, do not connect the connector for peripheral device wiring that might have excessive voltage to the following port(s).
: Ethernet connector
Follow the instructions for the above port(s).

**Attention-when the product is installed in Rack:**

1. **Prevention against overloading of branch circuit**
   When this product is installed in a rack and is supplied power from an outlet on the rack, please make sure that the rack does not overload the supply circuit.

2. **Providing protective earth**
   When this product is installed in a rack and is supplied power from an outlet on the rack, please confirm that the outlet is provided with a suitable protective earth connection.

3. **Internal air ambient temperature of the rack**
   When this product is installed in a rack, please make sure that the internal air ambient temperature of the rack is within the specified limit of this product.

4. **Prevention against achieving hazardous condition due to uneven mechanical loading**
   When this product is installed in a rack, please make sure that the rack does not achieve hazardous condition due to uneven mechanical loading.

5. **Install the equipment while taking the operating temperature of the equipment into consideration**
   For the operating temperature of the equipment, refer to the specifications of the Operation Manual.

**For the customers in the Netherlands**
**Voor de klanten in Nederland**

Hoe u de batterijen moet verwijderen, leest u in de tekst van deze handleiding.

Gooi de batterij niet weg maar lever deze in als klein chemisch afval (KCA).




**Für Kunden in Deutschland**

Entsorgungshinweis: Bitte werfen Sie nur entladene Batterien in die Sammelboxen beim Handel oder den Kommunen. Entladen sind Batterien in der Regel dann, wenn das Gerät abschaltet und signalisiert “Batterie leer” oder nach längerer Gebrauchsdauer der Batterien “nicht mehr einwandfrei funktioniert”. Um sicherzugehen, kleben Sie die Batteriepole z.B. mit einem Klebestreifen ab oder geben Sie die Batterien einzeln in einen Plastikbeutel.

**For the customers in Taiwan only**

廢電池請回收

**注意**

指定以外の電池に交換すると，破裂する危険があります。
使用済の電池は，説明書に従って処理してください。

**CAUTION**

Danger of explosion if battery is incorrectly replaced.

Replace only with the same or equivalent type recommended by the manufacturer.
Dispose of used batteries according to the manufacturer's instructions.

**Vorsicht!**

Explosionsgefahr bei unsachgemäßem Austausch der Batterie.

Ersatz nur durch denselben oder einen vom Hersteller empfohlenen ähnlichen Typ. Entsorgung gebrauchter Batterien nach Angaben des Herstellers.

**ATTENTION**

Il y a danger d'explosion s'il y a remplacement incorrect de la batterie.

Remplacer uniquement avec une batterie du même type ou d'un type équivalent recommandé par le constructeur.
Mettre au rebut les batteries usagées conformément aux instructions du fabricant.

**ADVARSEL!**

Lithiumbatteri-Eksplosionsfare ved fejlagtig håndtering.
Udskiftning må kun ske med batteri af samme fabrikat og type.
Levér det brugte batteri tilbage til leverandøren.

**ADVARSEL**

Lithiumbatteri - Eksplosjonsfare.
Ved utskifting benyttes kun batteri som anbefalt av apparatfabrikanten.
Brukt batteri returneres apparatleverandøren.

**VARNING**

Explosionsfara vid felaktigt batteribyte.
Använd samma batterityp eller en likvärdig typ som rekommenderas av apparattillverkaren.
Kassera använt batteri enligt gällande föreskrifter.

**VAROITUS**

Paristo voi räjähtää jos se on virheellisesti asennettu.
Vaihda paristo ainoastaan laitevalmistajan suosittelemaan tyyppiin.
Hävitä käytetty paristo valmistajan ohjeiden mukaisesti.

# Table of Contents

## Manual Structure


Purpose of this manual ..... 3 (E)
Related manuals ..... 3 (E)


## 1. Service Overview


1-1. Service Information ..... 1-1 (E)
1-1-1. Tools ..... 1-1 (E)
1-1-2. Cautions when Replacing the Lithium Battery ..... 1-1 (E)
1-2. Notes for Replacing the Parts ..... 1-1 (E)
1-3. Connecting/Disconnecting the Flexible Card Wire ..... 1-2 (E)
1-4. Writing and Rewriting the PLD Internal Data ..... 1-3 (E)
1-5. Circuit Protection Parts ..... 1-5 (E)
1-6. Circuit Description ..... 1-6 (E)
1-6-1. HDCU3300 Common ..... 1-6 (E)
1-6-2. HKCU1001 ..... 1-8 (E)
1-6-3. HKCU1003 ..... 1-8 (E)
1-6-4. HKCU1005 ..... 1-8 (E)
1-7. Notes on Repair Parts ..... 1-9 (E)
1-8. Unleaded Solder ..... 1-9 (E)


## 2. Replacement of Main Parts


2-1. Replacing the Main Parts ..... 2-1 (E)
2-1-1. Replacing the Power Supply Unit ..... 2-1 (E)
2-1-2. Replacing the Fuse ..... 2-3 (E)
2-1-3. Replacing the DC Fan ..... 2-4 (E)
2-1-4. Removing the Rear Panel ..... 2-5 (E)
2-1-5. Replacing the OTR-1 board ..... 2-6 (E)
2-1-6. Replacing the SPD-15 board ..... 2-6 (E)
2-1-7. Replacing the Right Side Fan ..... 2-7 (E)
2-1-8. Replacing the MB-1073 Board ..... 2-8 (E)
2-1-9. Replacing the CNB-21G Board ..... 2-9 (E)


## 3. Electrical Alignment


3-1. Preparation ..... 3-1 (E)
3-1-1. Required Equipment ..... 3-1 (E)
3-1-2. Notes on Adjustments ..... 3-1 (E)
3-1-3. Connection of Equipment ..... 3-2 (E)
3-1-4. Initialization Settings ..... 3-3 (E)
3-2. Audio System Adjustment ..... 3-4 (E)
3-2-1. Microphone Level Adjustment ..... 3-4 (E)
3-2-2. RTS Intercom Adjustment ..... 3-5 (E)
3-3. Video and Reference Signal System Adjustment ..... 3-6 (E)
3-3-1. 27 MHz VCO Free-run Adjustment ..... 3-6 (E)
3-3-2. Clock (74 MHz) Duty Adjustment ..... 3-6 (E)
3-3-3. Prompter 1/2 Level Adjustment ..... 3-7 (E)
3-4. Video Signal System Adjustment (Front board) ..... 3-7 (E)
3-4-1. SD-SDI Input VCO Free-run Adjustment ..... 3-7 (E)
3-4-2. STAIR CASE Adjustment ..... 3-8 (E)
3-5. SD Signal System Adjustment ..... 3-8 (E)
3-5-1. VBS Output Level Adjustment ..... 3-8 (E)
3-5-2. PIX Output Level Adjustment ..... 3-9 (E)
3-5-3. WF Output Level Adjustment ..... 3-9 (E)


## 4. Spare Parts


4-1. Notes on Repair Parts ..... 4-1
4-2. Exploded Views ..... 4-2
4-3. Electrical Parts List ..... 4-6
4-4. Packing Materials & Supplied Accessories ..... 4-127
4-5. Optional Fixtures List ..... 4-127


## 5. Semiconductor Pin Assignments

## 6. Block Diagrams


Overall ..... 6-2
AT-167S ..... 6-3
AU-302 ..... 6-5
AVP-6 ..... 6-6
CPU-395 ..... 6-7
DPR-271A ..... 6-9
DPR-271B ..... 6-10
DRX-5 ..... 6-11
DTX-5 ..... 6-12
EN-159A ..... 6-13
EN-159B ..... 6-13
HIF-25 ..... 6-14
HIF-26 ..... 6-14
HIF-27 ..... 6-14
SDI-85 ..... 6-14
CN-2674G ..... 6-15
SDI-86G ..... 6-15
SDP-15 ..... 6-16
VDA-64A ..... 6-17
VDA-64B ..... 6-17
VIF-34G ..... 6-18


## 7. Schematic Diagrams


ADO-10G ..... 7-2
AT-167S ..... 7-3
AU-302 ..... 7-13
AVP-6 ..... 7-14
CN-2672G ..... 7-23
CN-2673 ..... 7-24
CN-2674G ..... 7-24
CN-2700 ..... 7-25
CN-2718 ..... 7-25
CN-2805G ..... 7-25
CNB-21G ..... 7-26
CPU-395 ..... 7-29
DPR-271A ..... 7-34
DPR-271B ..... 7-50
DRX-5 ..... 7-66
DTX-5 ..... 7-75
EN-159A ..... 7-83
EN-159B ..... 7-91
HIF-25 ..... 7-99
HIF-26 ..... 7-100
HIF-27 ..... 7-101
MB-1073 ..... 7-103
OTR-1 ..... 7-106
SDI-85 ..... 7-118
SDI-86G ..... 7-119
SDP-15 ..... 7-121
VDA-64A ..... 7-128
VDA-64B ..... 7-129
VIF-34G ..... 7-131
Frame Wiring ..... 7-135


## 8. Board Layouts


AT-167 ..... 8-2
ADO-10 ..... 8-3
AU-302 ..... 8-3
AVP-6 ..... 8-4
CN-2672 ..... 8-5
CN-2673 ..... 8-5
CN-2674 ..... 8-5
CN-2700 ..... 8-5
CN-2718 ..... 8-5
CN-2805 ..... 8-5
CNB-21 ..... 8-6
CPU-395 ..... 8-7
DPR-271A ..... 8-8
DRX-5 ..... 8-9
DTX-5 ..... 8-10
EN-159 ..... 8-11
HIF-25 ..... 8-12
HIF-26 ..... 8-12
HIF-27 ..... 8-13
MB-1073 ..... 8-13
OTR-1 ..... 8-14
SDI-85 ..... 8-15
SDI-86 ..... 8-15
SDP-15 ..... 8-16
VDA-64 ..... 8-17
VIF-34 ..... 8-17

# Manual Structure

## Purpose of this manual

This manual is the maintenance manual of the following models :

| | |
|---|---|
| HD Camera Control Unit | HDCU3300 |
| SD Encoder Unit | HKCU1001 |
| Multi Interface Unit | HKCU1003 |
| SDI Output Expansion Unit | HKCU1005 |

This manual intended for use by trained system and service engineers describes (service overview and the circuit overview, the main part replacements, electrical alignment, parts list, semiconductor pin assignments, block diagrams, schematic diagrams, board layouts.) required for parts-level service.

## Related manuals

Beside this Installation Manual, the following manuals are available for the unit.

- **Operation Manual (Supplied with HDCU3300)**
  This manual describes how to operate the HDCU3300.

- **Installation Manual (Available on request)**
  This manual is intended for use by trained system and service engineers, and describes the information regarding the installation of the unit and the information that premises the service based on components replacement.
  For obtaining, contact your local Sony Sales Office/Service Center.
  Part number : 9-968-307-0X

- **“Semiconductor Pin Assignments” CD-ROM (Available on request)**
  This “Semiconductor Pin Assignments” CD-ROM allows you to search for semiconductors used in Broadcast and Professional equipment.
  This manual contains a complete list of semiconductors and their ID Nos., and thus should be used together with the CD-ROM.
  Part number: 9-968-546-0X

# Section 1
# Service Overview

## 1-1. Service Information

### 1-1-1. Tools

| Sony P/N | Name |
|---|---|
| A-1153-700-A | Extension board EX-982*1 |
| A-1153-701-A | Extension board EX-983*2 |
| A-1215-624-A | Extension board EX-1002*3 |
| J-6480-010-A | Alignment sleeve*4 |
| | Remover HC-001 |
| J-7120-140-A | PLD download tool*5 |
| – | Cotton swab*6 |

*1 : Extension board for front plug-in board
*2 : Extension board for rear plug-in board
*3 : Extension board for SDP-15 board
*4 : For female optical connector
*5 : PLD data download cable
*6 : Commercially available
For cleaning optical contact block (4 mm or less in diameter)

### 1-1-2. Cautions when Replacing the Lithium Battery

The lithium battery is installed on the AT-167S board. This lithium battery is used to back up the real-time clock (RTC). RTC stops operating when the battery life expires. Replace the battery and reset DATE/TIME on the C11 (C12*) DATE page in the configuration menu. (refer to Installation Manual Section 3 “Menu Settings”.)

* : Menu “C11” changes to “C12” when the EN-159 board is installed.

AT-167S board/CR2032: Sony part number (1-528-174-11)

**CAUTION**

Ensure that the battery is installed with + and – poles connected to the correct terminals. An incorrect connection may cause an explosion or leakage of fluid.

## 1-2. Notes for Replacing the Parts

The unit cannot use the following boards that are not G type.

| board name |
|---|
| CN-2672G |
| CN-2674G |
| CN-2805G |
| CNB-21G |
| SDI-86G |
| VIF-34G |

Also, flexible card wires with a silver contact (terminal) cannot be used.

## 1-3. Connecting/Disconnecting the Flexible Card Wire

The flexible card wires are used to connect between the following boards. Life of flexile card wire will be significantly shortened if it is bent. Be very careful not to bend the flexible card wire.
Three types of different-shaped connectors are used in HDCU3300. (Type A to type C)
Because the direction of the flexible card wire is different depending on the shape of the connector, be careful when connecting the flexible card wire.

### Disconnecting

1. Turn off the power.
2. Slide or raise the portion A in the direction of the arrow to unlock and pull out the flexible card wire.

### Connecting

**Notes**

- Do not insert the flexible card wire sideways.
- Confirm that there is no stain or dust on the contact surface of the flexible card wire.

1. Slide or raise the portion A in the direction of the arrow and securely insert the flexible card wire into the deep end of the connector.
2. Return the portion A to its original position and lock the connector.

**Note**

When connecting the flexible card wire, check the connector shape, and great care should be taken for the direction of the contact surface or isolation surface (blue).
(Refer to illustration of the type A to type C.)

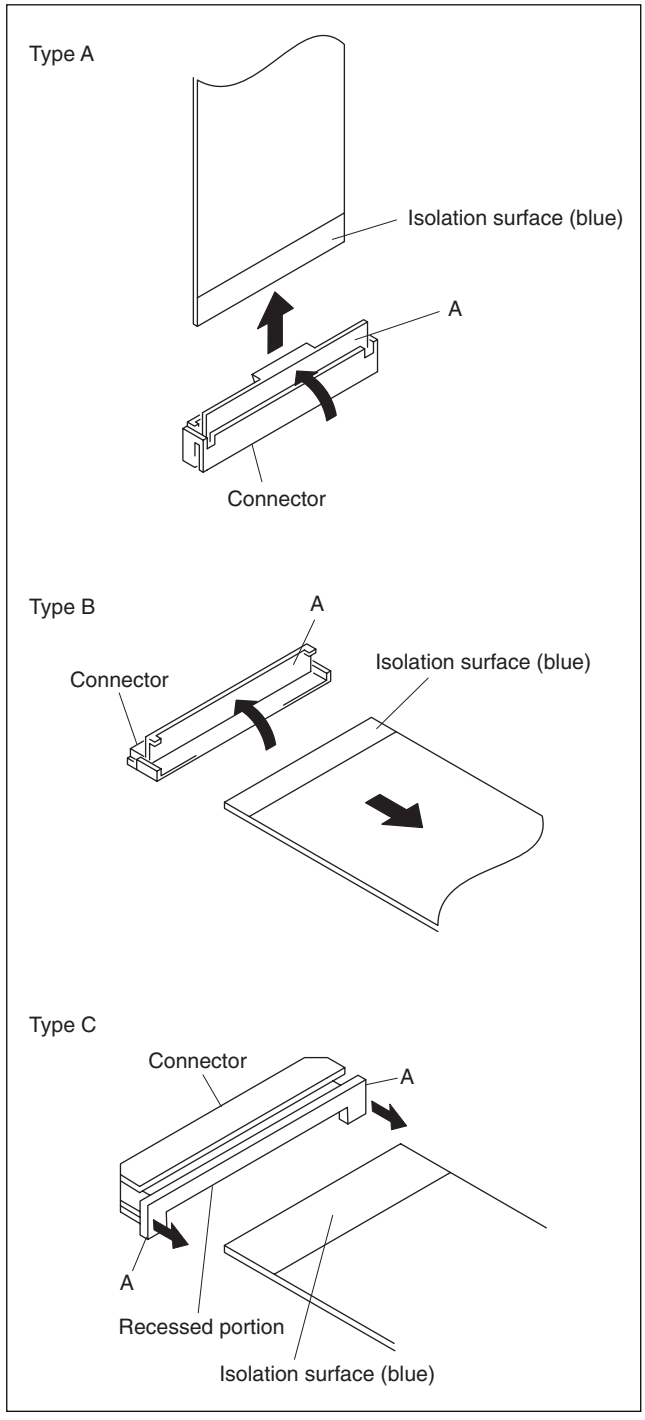

## 1-4. Writing and Rewriting the PLD Internal Data

HDCU3300 uses the PLD (Programmable Logic Device) that supports the e-Production (EPR) system to write and rewrite the internal data.
If the parts listed below needs to be replaced or if PLD needs to be upgraded, contact your local Sony Sales Office/Service Center.

**Note**

The part number of PLD (or ROM for PLD) in which data is not written yet, is shown in " Spare Parts".
Therefore, if part replacement is required, write the data by the following procedure.
In the case of the PLD type that runs on the program stored in external ROM, the PLD has only to be replaced and data needs not to be written only if the specific PLD is defective.

### e-Production system has the advantages shown below.

- To write/rewrite the PLD internal data:
  1. The standard fixture (cable) can be used.
  2. The standard software (PLD Download Tool) can be used.
- The PLD internal data is controlled in the Sony Database Server under the name Project file (E_xxx_xxx_xx_xx).
- The printed circuit board is equipped with the standard connector (EPR connector) to write the PLD internal data. The indication "EPR" is shown on the printed circuit board.

### Corresponding PLDs

| Board name<br>PLD/ROM | EPR connector | Project file No. |
|---|---|---|
| AT-167S<br>IC601∗1, IC603 | CN601 | E_000_001_93_xx |
| AVP-6<br>IC302, IC310∗2 | CN3 | E_000_001_94_xx |
| CPU-395<br>IC312∗3, IC315 | CN301 | E_000_002_00_xx |
| DTX-5<br>IC401, IC505∗4,<br>IC506∗4 | CN501 | E_000_001_95_xx |
| DPR-271A<br>IC211, IC401∗5, | CN301 | E_000_002_02_xx |
| DPR-271B<br>IC211, IC401∗5, | CN301 | E_000_002_03_xx |
| DRX-5<br>IC211, IC213∗6,<br>IC214∗6, IC215∗6 | CN3 | E_000_001_96_xx |
| SDP-15∗10<br>IC203, IC312,<br>IC307∗7 | CN301 | E_000_001_97_xx |
| OTR-1<br>IC1, IC601∗8, | CN601 | E_000_003_37_xx |
| EN-159A/159B<br>(HKCU1001/1003)<br>IC210, IC501,<br>IC502∗9, IC504∗9 | CN501 | E_000_001_98_xx |

∗1 : IC601/AT-167S is a ROM for IC603/AT-167S.
∗2 : IC310/AVP-6 is a ROM for IC302/AVP-6.
∗3 : IC312/CPU-395 is a ROM for IC315/CPU-395.
∗4 : IC505, IC506/DTX-5 is a ROM for IC401/DTX-5.
∗5 : IC302, 303, 304, 305, 306/DPR-271 is a ROM for IC211, IC401/DPR-271.
∗6 : IC213, IC214,IC215/DRX-5 is a ROM for IC211/DRX-5.
∗7 : IC307/SDP-15 is a ROM for IC203, IC312/SPD-15.
∗8 : IC601/OTR-1 is a ROM for IC1/OTR-1.
∗9 : IC502, IC504/EN-159A/159B is a ROM for IC210, IC501/EN-159A/159B.
∗10 : The data in the PLD of the SDP-15 board can also be written or rewritten via the AVP-6 board. Turn on switch S4-8 on the AVP-6 board.

**Note**

After having written or rewritten the data in the PLD of the SDP-15 board via the AVP-6 board, turn off switch S4-8 on the AVP-6 board.

### Equipment required

- PLD download tool (Sony part number : J-7120-140-A)
  The cable to connect PC to HDCU3300.
- PC
  A PC having parallel port.
  A PC in which the PLD Download Tool software is already installed.
  For the applicable OS and the operating environment, refer to “Download Tool Operating Instruction for Device Programming”.

### Data writing procedure

Data writing procedure in the PLD (or ROM for PLD) is outlined below.
For details of data writing procedure, refer to “Download Tool Operating Instruction for Device Programming”, which is available in the same site where the PLD Download Tool software is available.

Step 1 Prepare the Project file.

**Note**

Download the Project file from the Sony Database Server.

Step 2 Turn off the power of HDCU3300.
Connect the PC parallel port to the EPR connector of the target board using the PLD download tool (cable).

Step 3 Turn on the power of HDCU3300.
Start the PLD Download Tool software and read the Project file.

Step 4 Program the PLD (or ROM for PLD) with the PLD Download Tool software.

Step 5 Upon completion of programming, check that error message is not displayed. Turn off the power of HDCU3300 and back on.

## 1-5. Circuit Protection Parts

### Thermistors

HDCU3300 is provided with positive thermistors for power circuit. If an overcurrent flows in a positive thermistor or it heats up to a certain degree with the increase of the ambient temperature, its internal resistance increases sharply to limit the current flowing in the circuit. When a thermistor is activated, turn off the power and check the circuit of the unit. After the cause of the problem is removed and the device cools down, turn on the power again. The unit will work normally. It takes about one minute for the device to cool down.

| Borad name | Ref. No. | Address | Sony P/N |
|---|---|---|---|
| AT-167S | THP1 | H1 (A side) | ⚠ 1-533-817-21 |
| | THP2 | H1 (A side) | ⚠ 1-533-817-21 |
| | THP3 | C1 (A side) | ⚠ 1-804-458-21 |
| | THP4 | C2 (A side) | ⚠ 1-804-458-21 |
| | THP101 | C3 (A side) | ⚠ 1-803-353-21 |
| AVP-6 | THP100 | H4 (A side) | ⚠ 1-803-615-21 |
| | THP101 | H4 (A side) | ⚠ 1-803-615-21 |
| | THP102 | H2 (A side) | ⚠ 1-804-616-21 |
| | THP103 | H2 (A side) | ⚠ 1-804-458-21 |
| | THP104 | H3 (A side) | ⚠ 1-804-616-21 |
| | THP105 | H3 (A side) | ⚠ 1-804-616-21 |
| | THP106 | H2 (A side) | ⚠ 1-804-616-21 |
| CPU-395 | THP1 | H2 (A side) | ⚠ 1-804-458-21 |
| | THP2 | H3 (A side) | ⚠ 1-804-458-21 |
| | THP3 | H1 (A side) | ⚠ 1-533-817-21 |
| | THP4 | H1 (A side) | ⚠ 1-804-458-21 |
| | THP101 | B2 (B side) | ⚠ 1-803-353-21 |
| DTX-5 | THP101 | B1 (A side) | ⚠ 1-533-817-21 |
| | THP102 | E1 (A side) | ⚠ 1-533-817-21 |
| | THP103 | E1 (A side) | ⚠ 1-533-817-21 |
| | THP104 | D1 (A side) | ⚠ 1-533-817-21 |
| | THP105 | D1 (A side) | ⚠ 1-533-817-21 |
| | THP106 | C1 (A side) | ⚠ 1-533-817-21 |
| DPR-271A | THP3 | E1 (B side) | ⚠ 1-533-817-21 |
| | THP4 | E1 (B side) | ⚠ 1-533-817-21 |
| | THP5 | D5 (A side) | ⚠ 1-533-817-21 |
| | THP6 | E5 (A side) | ⚠ 1-533-817-21 |
| | THP8 | A2 (A side) | ⚠ 1-533-817-21 |
| DPR-271B | THP3 | E1 (B side) | ⚠ 1-533-817-21 |
| | THP4 | E1 (B side) | ⚠ 1-533-817-21 |
| | THP5 | D5 (A side) | ⚠ 1-533-817-21 |
| | THP6 | E5 (A side) | ⚠ 1-533-817-21 |
| | THP8 | A2 (A side) | ⚠ 1-533-817-21 |
| DRX-5 | THP1 | G1 (A side) | ⚠ 1-533-817-21 |
| | THP2 | G1 (A side) | ⚠ 1-533-817-21 |
| | THP3 | H1 (A side) | ⚠ 1-533-817-21 |
| | THP4 | H1 (A side) | ⚠ 1-533-817-21 |
| | THP5 | D4 (A side) | ⚠ 1-533-817-21 |
| | THP6 | D1 (A side) | ⚠ 1-533-817-21 |
| | THP7 | B4 (A side) | ⚠ 1-533-817-21 |
| VIF-34G | THP1 | A2 (B side) | ⚠ 1-804-458-21 |
| | THP2 | A2 (B side) | ⚠ 1-804-458-21 |
| | THP3 | C1 (B side) | ⚠ 1-803-615-21 |
| | THP4 | A2 (B side) | ⚠ 1-803-615-21 |
| | THP5 | A2 (B side) | ⚠ 1-803-615-21 |
| | THP6 | A1 (A side) | ⚠ 1-804-458-21 |
| EN-159A/ 159B | THP101 | B4 (A side) | ⚠ 1-533-817-21 |
| | THP102 | C4 (A side) | ⚠ 1-533-817-21 |
| | THP103 | H4 (A side) | ⚠ 1-533-817-21 |
| | THP104 | J1 (A side) | ⚠ 1-533-817-21 |
| | THP105 | H5 (A side) | ⚠ 1-533-817-21 |
| | THP106 | H4 (A side) | ⚠ 1-803-615-11 |
| | THP107 | H4 (A side) | ⚠ 1-803-615-11 |

## 1-6. Circuit Description

### 1-6-1. HDCU3300 Common

#### Front Boards

**AT-167S board**

The AT-167S board has the built-in microprocessor (SH2-DSP). It controls various circuit boards inside the HDCU3300 and the power supply. It also performs the system setup including a camera.
The board performs command communication with a camera, and with RCP, MSU, or CNU.
Also, it enables Ethernet connection by the Ethernet controller with the built-in microprocessor.
It has the built-in signal generator circuit generating HD and SD. This signal generator circuit establishes gen-lock with external (main) reference and also gen-lock between HD and SD. It controls phase of all video signal outputs.
It has the sync output of one channel enabling to switch between the HD ternary value sync signal and the SD sync signal.

**AVP-6 board**

The AVP-6 board processes the audio signal, tally, and trunk line. It has the following functions.

- D/A-converts and outputs the MIC signals supplied from the camera in digital format.
- A/D converts the intercom signals (ENG/PROD/PGM/Front-Intercom) input to the HDCU3300.
- Inputs the intercom signals sent from the camera in digital format and the A/D-converted audio signals of the HDCU3300 to the digital mix IC, and performs line selection, mixing, and volume control.
- D/A converts the signals processed at the digital mix IC, and outputs it to external circuits.
- R/G tally signal I/F
- Trunk line (RS-232C/422A) I/F

**CPU-395 board**

The CPU-395 board has a microprocessor (SH2) and controls the video process on the DPR-271 board.
It also communicates commands with the camera and the AT-167S board.

**DTX-5 board**

The DTX-5 board processes the return signals and the prompter signals.
This board can handle the HD-SDI/SD-SDI/VBS signals as return signals, and convert them to the specified signals and send them back to the camera.

- Phase adjustment is performed on the HD-SDI signal.
- The SD-SDI signal is up-converted to the pseudo-HD signal and its signal phase is adjusted.
- The VBS signal is converted to the digital signal equivalent to the SD-Digital-Component signal, and processed in the same way as the SD-SDI signal.

The signal input as a prompter is A/D-converted, embedded to the return signal and then sent to the camera.

**DPR-271A board**

The DPR-271A board performs the super motion output processing for the main-line signals from the camera.

- Phase adjustment and re-clocking using line memory
- Addition processing for generating the normal-speed signal as necessary
- Flicker correction function as necessary
- Camera signal (gamma, knee, detail, etc.) processing function
- Has the built-in HD color bar generator
- Matches the MIC signal from the camera to the delay of the video signal, and then multiplexes it to the SDI signal.
- 1080-to-720 conversion function as necessary

**DPR-271B board**

The DPR-271B board performs the HD-SDI output processing for the main-line signals from the camera.

- Phase adjustment and re-clocking using line memory
- Camera signal (gamma, knee, detail, etc.) processing function
- Has the built-in HD color bar generator
- Matches the MIC signal from the camera to the delay of the video signal, and then multiplexes it to the SDI signal.
- 1080-to-720 conversion function as necessary

**DRX-5 board**

The DRX-5 board processes the main-line signals from the camera.

- Phase adjustment and re-clocking using line memory
- Down-conversion function as necessary
- Has the built-in HD/SD signal color bar generator and supports multiple formats
- Matches the MIC signal from the camera to the delay of the video signal, and then multiplexes it to the SDI signal.
- Analog character output

### AU-302 board

The AU-302 board is an interface to the front INCOM connector, and has the intercom control switch and indicators.

## Rear boards

### SDP-15 board

The SDP-15 board processes the main-line signals sent from the OTR-1 board and the return signals to the OTR-1 board, and selects the VF signal. The board converts one channel of the six-channel main-line serial signal sent from the OTR-1 board from the serial to parallel signal.
Then, it separates the digital audio signal and the commands multiplexed to the main line, and sends the digital audio signal to the AVP-6 board and commands to the AT-167S board.
Also, the return video signal is sent from the DTX-5 board, the digital audio signal from the AVP-6 board, and commands from the AT-167S board. The board then multiplexes the digital audio signal and the commands to the return video signal. The return signal is then converted from the parallel to serial signal, and sent to the OTR-1 board as the serial signal.
The SDP-15 board selects one channel from the triple-speed VF video signal sent from the DPR-271A board and the normal-speed VF video signal sent from the DPR-271B board, and then sends the signal to the OTR-1 board.

### OTR-1 board

The OTR-1 board separates the main-line signals sent from the camera, and multiplexes the return signals to the camera. The board converts the main-line light serial signal sent from the camera from light to electricity and from the serial to parallel signal.
Then, it separates the multiplexed main-line signal into six channels, converts each of them from parallel to serial, and sends them to the SDP-15 board as the six-channel serial signal.
Also, the OTR-1 board converts the serial return video signal and the serial VF video signal sent from the SDP-15 board into the parallel signals and multiplexes them. The multiplexed return signal is then converted from the parallel to serial signal, and electricity to light, and sent to the camera as the light serial signal.

### VIF-34G board

I/F board that connects each connector on the rear panel

- I/F of MIC REMOTE, WFM REMOTE, and I/O PORT of the D-Sub 15 pin connector
- SYNC output, CHARACTER output
- Retains serial numbers in EEPROM.

### ADO-10 board

Relay board between the AVP-6 board and the rear panel connector

- INCOM/MIC/PGM
- TRUNK LINE
- AES/EBU

### HIF-25 board

The HIF-25 board has the co-axial connector for outputting the HD/SD-SDI signals to external devices.
The board outputs two systems of the main-line system HD/SD-SDI signal sent from the DRX-5 board, and outputs two systems of the monitor-system HD/SD-SDI signal.

### SDI-85 board

The SDI-85 board inputs the return signals of HD-SDI from external devices.
The board has four systems of the return input of the HD-SDI signal, which are selected and then sent to the DTX-5 board.

### SDI-86G board

The SDI-86G board mainly inputs the return signals of SD-SDI from external devices and the composite analog return signals.
The board has four systems of the return input of the SD-SDI signal, which are selected and then sent to the DTX-5 board. Apart from that, it has four systems of the return input of the composite analog signal from the CN-2674G board, which are selected and then sent to the DTX-5 board. It also has two systems of the amplifier for the prompter signal from the CN-2674G board that is amplified and then sent to the DTX-5 board.

### HIF-27 board

The HIF-27 board has the coaxial connector for outputting the HD/SD-SDI signals to external devices.
It outputs two systems of the main-line system HD/SD-SDI signals sent from the DRX-5 board, and outputs one system of the monitor-system HD/SD-SDI signals.

## 1-6-2. HKCU1001

The HKCU1001 supports the basic functions of VBS_OUT, PIX_OUT, and WFM_OUT.

### Front board

#### EN-159A board

The EN-159A board receives 8:4:4 component digital signal from the front side (DRX-5 board), and outputs the main-line system SD analog composite signals (VBS, PIX, and WFM signals). The board is equipped with the external synchronous circuit of the reference SC (sub carrier) of SD, and the composite signal whose external SC is locked can be output.

### Rear board

#### VDA-64A board

The VDA-64A board outputs the SD analog signals (VBS, PIX, and WFM signals) to external devices.

## 1-6-3. HKCU1003

In addition to the functions of the HKCU1001, the HKCU1003 supports functions including SUB_REF. (The synchronizing function of the sub reference cannot be used in the HDCU3300.)

### Front board

#### EN-159B board

The EN-159B board receives the 8:4:4 component digital signal from the front side (DRX-5 board), and outputs the main-line SD analog composite (VBS, PIX, and WFM signals).
Also, the board is equipped with the synchronous circuit of the sub reference signal, and the output of the staircase signal for the WFM sequential display.
(The synchronizing function of the sub reference cannot be used in the HDCU3300.)

### Rear boards

#### VDA-64A board

Same as the HKCU1001.
Insert this board to the rear side of the slot that has the EN-159B board inserted in its front side.

#### VDA-64B board

The VDA-64B board is used to output the SD analog signals (PIX, WFM signals), and to input or output Frame_Reference to external devices.
Insert this board to the rear side of the slot that has the EN-159B board inserted in its front side.

#### VDA-64C board

The VDA-64C board cannot be used in the HDCU3300.

## 1-6-4. HKCU1005

### Front boards

#### DRX-5 board

Same as the DRX-5 board common to HDCU3300.

#### HIF-26 board

The HIF-26 board has the coaxial connector for outputting the HD/SD-SDI signals to external devices.
It outputs two systems of the main-line system HD/SD-SDI signals sent from the DRX-5 board in the optional slot, and outputs two systems of the monitor-system HD/SD-SDI signals.

## 1-7. Notes on Repair Parts

**1. Safety Related Components Warning**

**WARNING**

Components marked ⚠ are critical to safe operation. Therefore, specified parts should be used in the case of replacement.

**2. Standardization of Parts**

Some repair parts supplied by Sony differ from those used for the unit. These are because of parts commonality and improvement.

Parts list has the present standardized repair parts.

**3. Stock of Parts**

Parts marked with “o” at SP (Supply Code) column of the spare parts list may not be stocked. Therefore, the delivery date will be delayed.

**4. Harness**

Harnesses with no part number are not registered as spare parts.

## 1-8. Unleaded Solder

Boards requiring use of unleaded solder are printed with a lead free mark (LF) indicating the solder contains no lead. (Caution: Some printed circuit boards may not come printed with the lead free mark due to their particular size.)

: LEAD FREE MARK

**Notes**

- Be sure to use the unleaded solder for the printed circuit board printed with the lead free mark.
- The unleaded solder melts at a temperature about 40 °C higher than the ordinary solder, therefore, it is recommended to use the soldering iron having a temperature regulator.
- The ordinary soldering iron can be used but the iron tip has to be applied to the solder joint for a slightly longer time. The printed pattern (copper foil) may peel away if the heated tip is applied for too long, so be careful.

# Section 2
# Replacement of Main Parts

## 2-1. Replacing the Main Parts

Before replacing or removing the parts, turn off the power and unplug the power cable from the wall outlet.

**Note**

Wait for at least three minutes before starting replacement, because even after turning off the power, a high voltage remains in the machine that could cause electric shock.

### 2-1-1. Replacing the Power Supply Unit

**WARNING**

The components marked ⚠ are critical to safe operation. If you replace with parts other than the specified ones, a fire or electric shock may result from that.

**CAUTION**

When repairing or replacing the power supply block, set the voltage. If the voltage is set incorrectly, a fire or electric shock may result from that.

- When repairing or replacing the power supply block, set to the same power supply voltage as that of repair work bench.
- When delivering to the user, adjust the power supply voltage to suit the user.

Gently remove or attach the power supply unit holding it by hand.
Otherwise, the power supply unit may fall, causing an injury.

---

**Replacement Part**

Part : Power supply unit
Part No. : ⚠ 1-468-945-21

1. Remove the front panel.
2. Remove the four screws and remove the flexible card wire from the connector J8.
3. Remove the PS panel assembly.

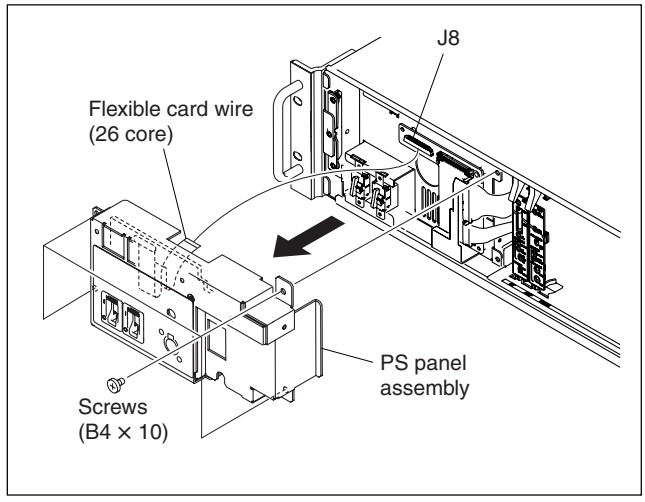


4. Disconnect the harnesses from the power supply unit board connectors J5, J6, and J7.
5. Remove the power supply unit from HDCU3300 in the direction of the arrow.

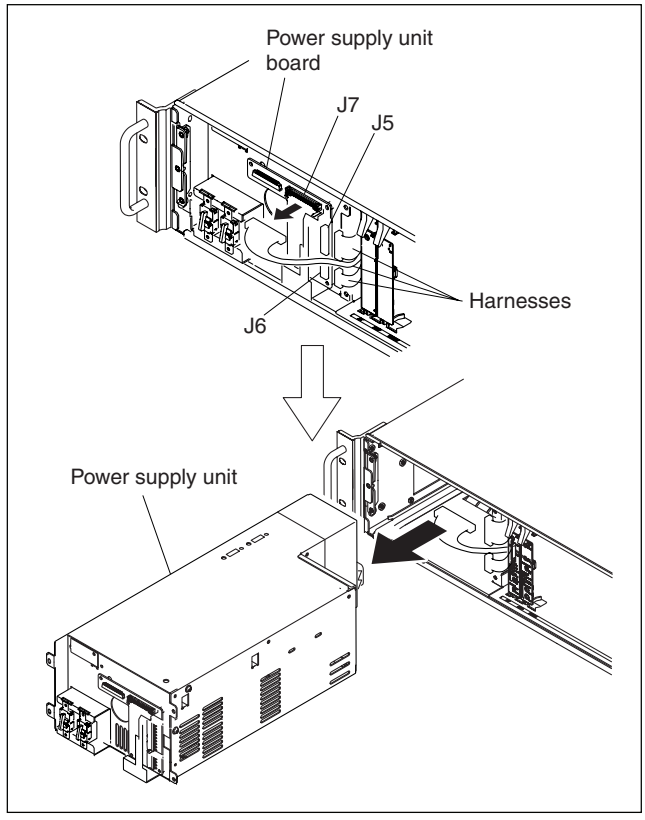

6. Set the two voltage selectors on the new power supply unit as shown in the following figure.

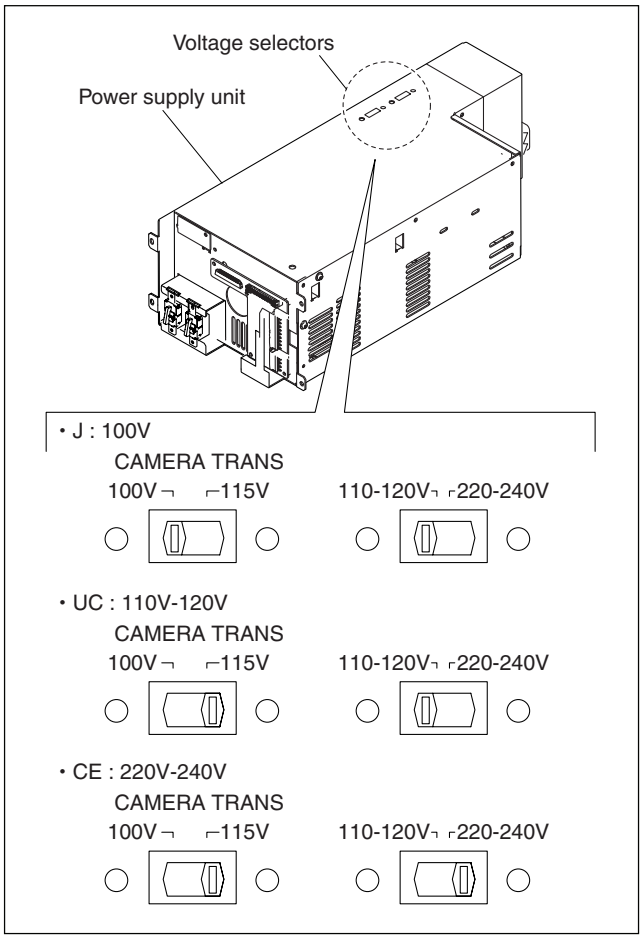


7. Confirm if the CAMERA fuse of the replacement power supply unit adapts to the working power supply voltage. If not, replace it with the one adapting to the working power supply voltage.
(Refer to Section 2-1-2.)

**Note**

If the rating of the fuse doesn't adapt to the working power supply voltage, the safety can not be ensured. So, the CAMERA fuse needs to be replaced with the one adapting to the working power supply voltage.

8. Install the power supply unit by reversing the steps of removal.

## 2-1-2. Replacing the Fuse

**WARNING**

The components marked ⚠ are critical to safe operation. If you replace with parts other than the specified ones, a fire or electric shock may result from that.

### Replacement Part

#### MAIN fuse

Part : Fuse (6.3 A, 250 V)
Part No. : ⚠ 1-576-233-51

#### CAMERA fuse

For UC
100 to 120 V
Part : Fuse ( 6.3 A, 250 V)
Part No. : ⚠ 1-576-233-51

For CE, CN
220 to 240 V
Part : Fuse (4 A, 250 V)
Part No. : ⚠ 1-576-231-51

### Replacement Procedure

1. Remove the PS panel assembly.
   (Refer to Section 2-1-1.)
2. Insert a flat-blade screwdriver into the groove of the fuse holder, and rotate it in the direction of arrow A (by about 90°) to unlock. (Fig. 1)
3. Remove the fuse with the fuse holder. (Fig. 2)
4. Remove the fuse from the fuse holder. (Fig. 3)

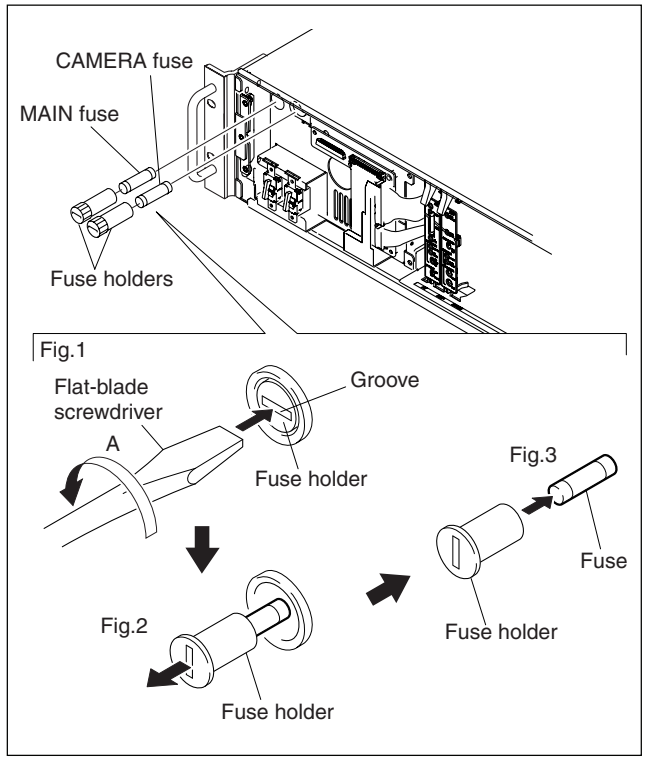


5. Attach the fuse in the reverse order.

   **Note**

   A spring is already attached in the fuse holder. When attaching a new fuse, rotate the flat-blade screwdriver in the direction of arrow C (by about 90°) while pressing it in the direction of arrow B to lock the fuse holder.

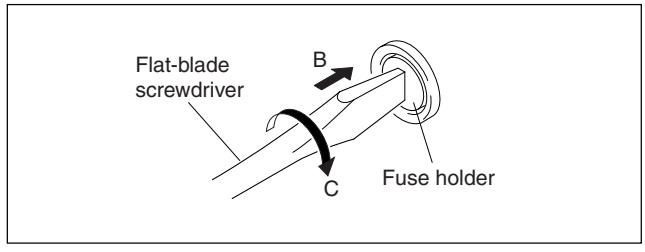

## 2-1-3. Replacing the DC Fan

**CAUTION**

If the fan is defective, the temperature inside HDCU3300 will rise. Touching the inside of the unit in this state may cause a burn.
Replace the parts after turning off the power and cooling the inside.

Periodical replacement of the fan installed on the rear panel of this unit is recommended.
The life of the fan is about 30,000 hours, which is about three and a half years under the condition where the unit is continually powered. We recommend that you replace the fan once this period is over.

1. Turn off the main power and disconnect the plug from the outlet.
2. Remove the power supply unit.
   (Refer to Section 2-1-1.)
3. Remove the seven screws and remove the cover.
4. Remove the harness from the wire clamp.
5. Disconnect the harness from the connector J19.
6. Remove the four screws and remove the fan portion.

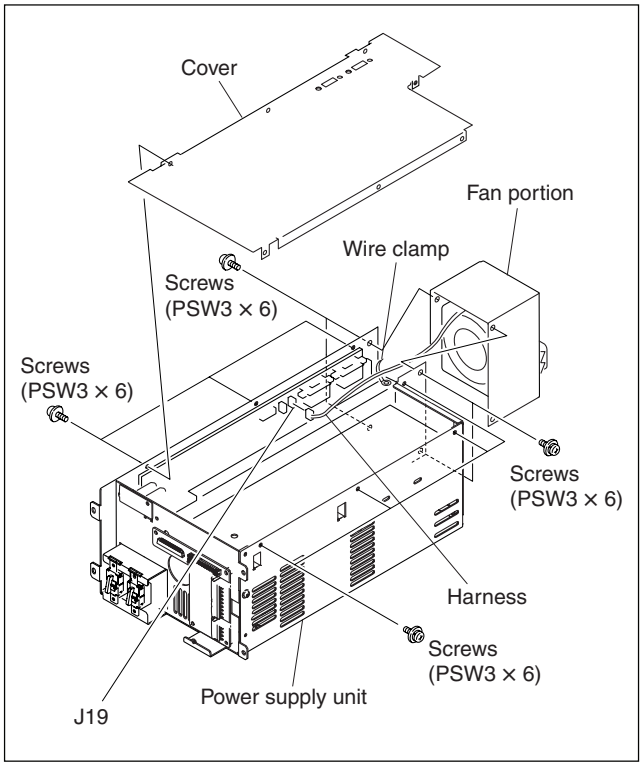


7. Remove the three screws and remove the fan bracket.
8. Remove the DC fan and mesh from the fan cover.

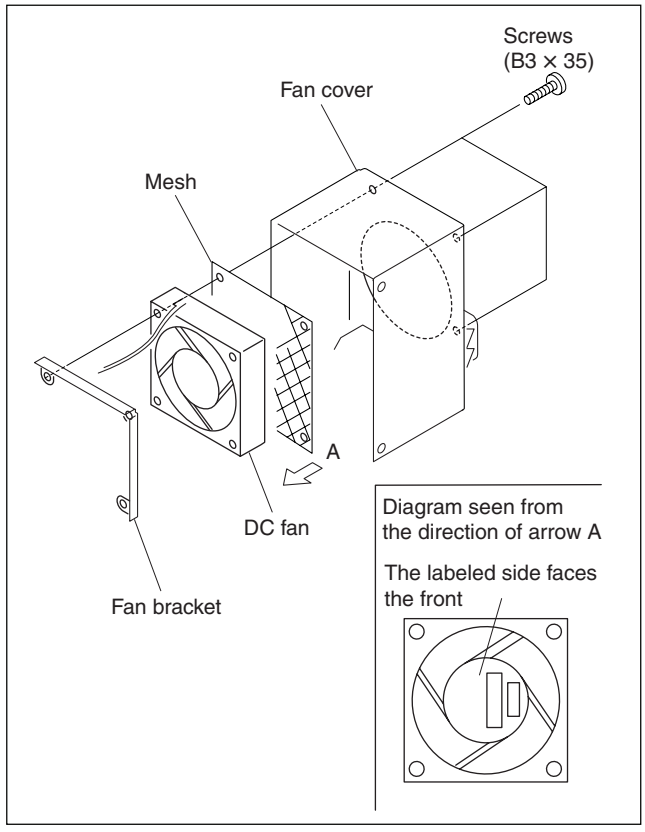


9. Install the DC fan by reversing the steps of removal.

   **Note**

   Install the DC fan in the direction shown in the diagram above.

## 2-1-4. Removing the Rear Panel

1. Remove the front panel.
2. Remove the 15 screws and remove the top cover.
3. Remove the seven screws and remove the heat spreader.
4. Remove the two screws and remove the HIF-26 board.

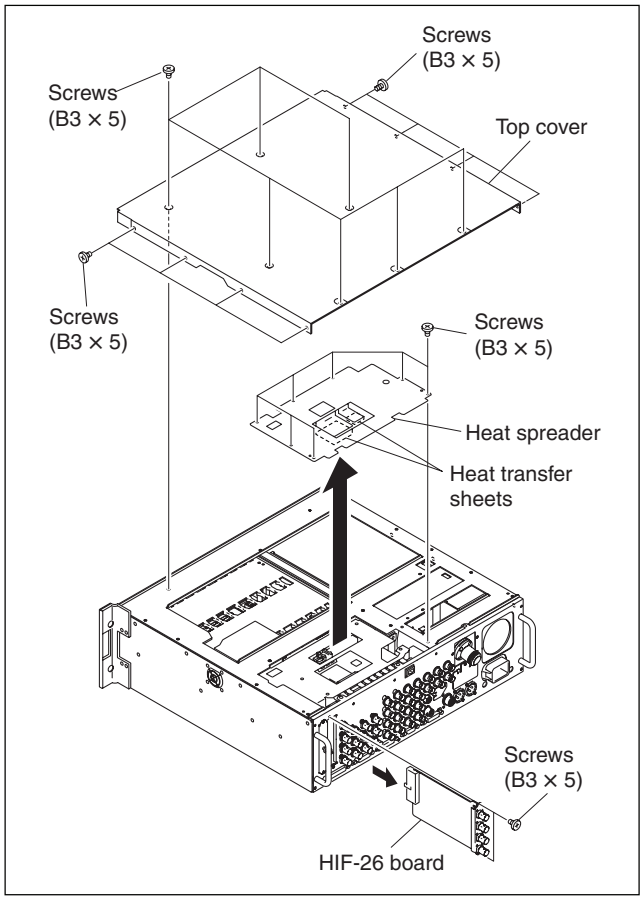


5. Remove the 11 screws and disconnect the harness from the connector CN1 on the CN-2718 board.

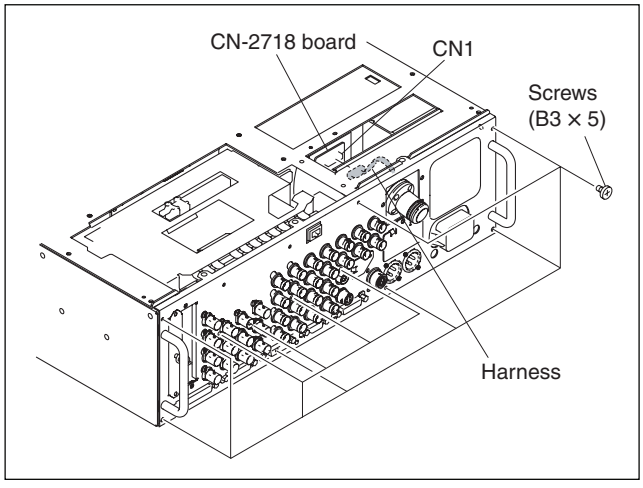


6. Disconnect the harness from connector CN104 on the SDP-15 board.
7. Slightly draw out rear panel with the SDP-15 board on, and disconnect the harness and the flexible card wire from connectors CN14 and CN15 on the CN-2672G board.

**Note**

Life of flexible card wire will be significantly shortened if it is folded. Be very careful not to fold the flexible card wire.

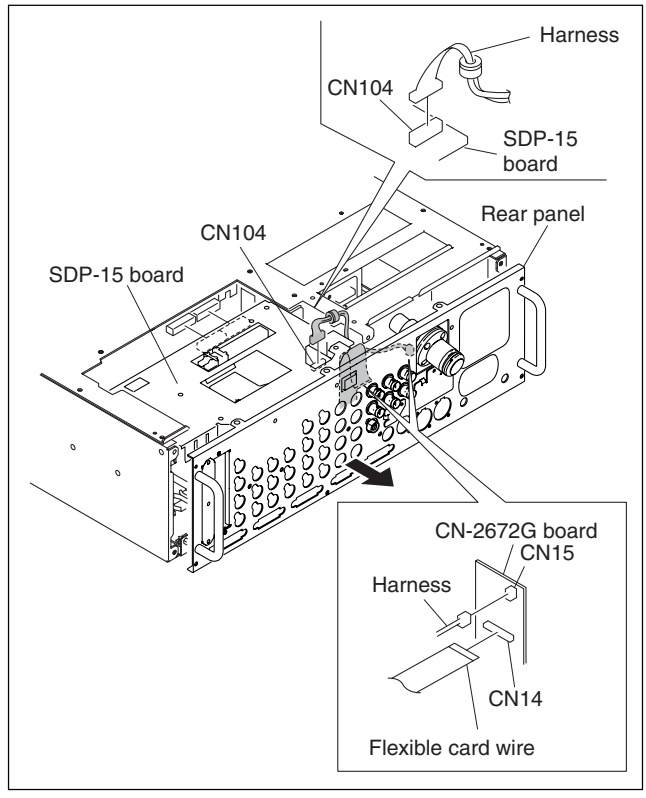


8. Remove the rear panel and the OTR-1/SDP-15 board together in the direction of the arrow.

**Note**

Be very careful in handling the optical cable when removing the rear panel and the OTR-1/SDP-15 board.

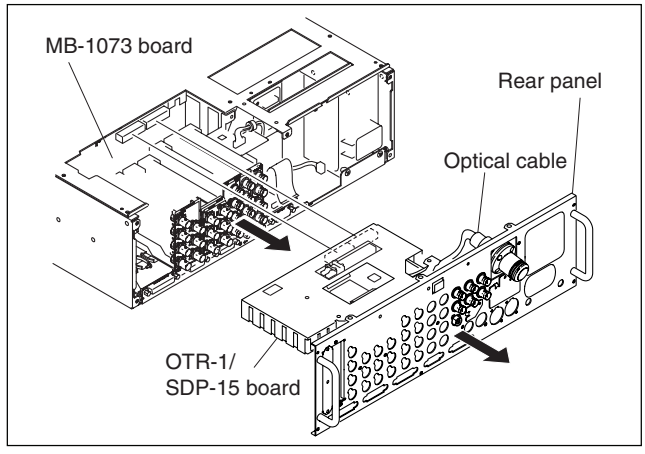

9. Remove the four screws and remove the SDP-15 cover.
10. Disconnect the harness from the connector CN103 on the SDP-15 board.
11. Disconnect the two optical cables from the connector CN1001 on the OTR-1 board and remove the rear panel.

**Disconnecting the optical cables**

① Hold the plug of the optical cable and press on the lock to release it.
② Pull out the unlocked optical cable.

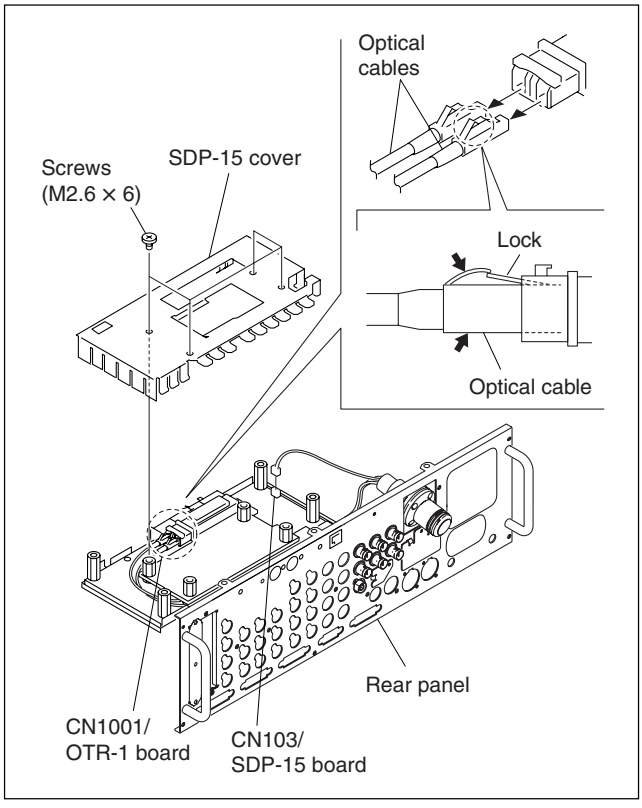


12. Install the rear panel by reversing the steps of removal.

## 2-1-5. Replacing the OTR-1 board

1. Remove the rear panel. (Refer to Section 2-1-4.)
2. Remove the four hexagonal bolts and remove the OTR-1 board.

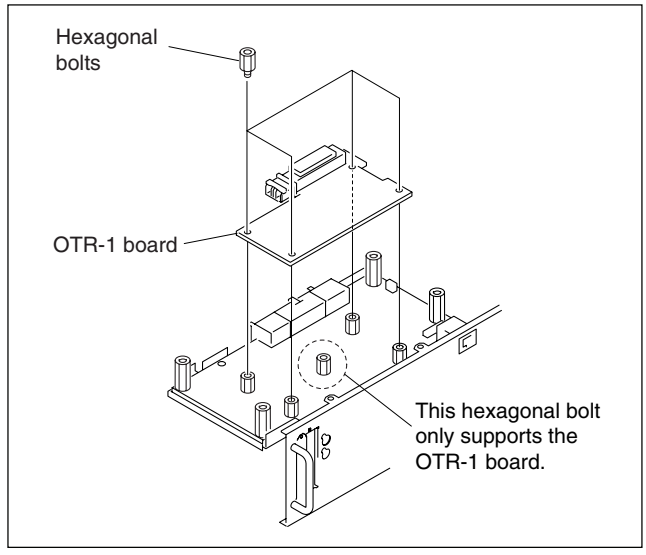


3. Install the OTR-1 board by reversing the steps of removal.

## 2-1-6. Replacing the SPD-15 board

1. Remove the rear panel. (Refer to Section 2-1-4.)
2. Remove the OTR-1 board. (Refer to Section 2-1-5.)
3. Remove the two screws, four spacers, five hexagonal bolts and remove the SDP-15 board.

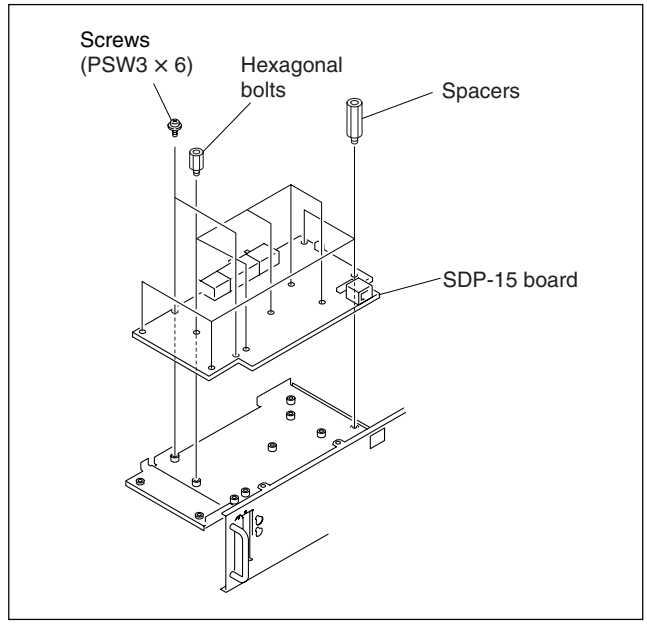


4. Install the SDP-15 board by reversing the steps of removal.

## 2-1-7. Replacing the Right Side Fan

1. Remove the rear panel. (Refer to Section 2-1-4.)
2. Pull the lever in the direction of the arrow and remove the two plug-in boards (DRX-5 board and the option board).

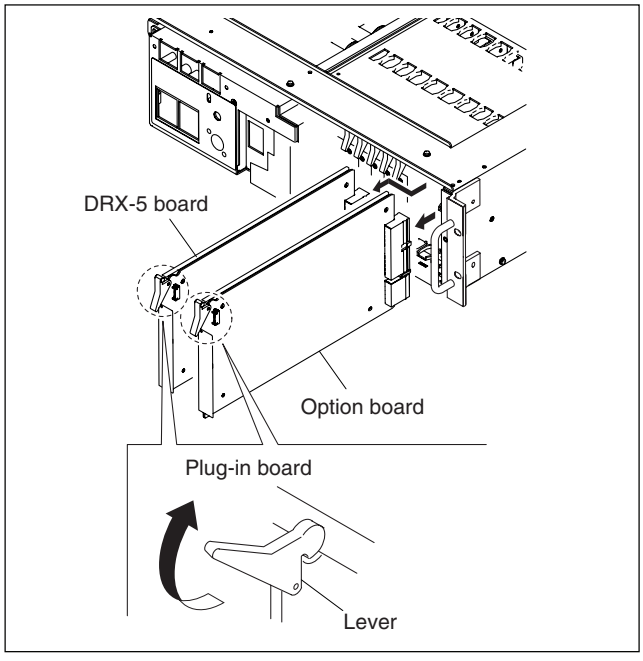


3. Remove the screw and remove the ventilation guide (upper).
4. Disconnect the fan harness from the connector CN33 on the MB-1073 board.

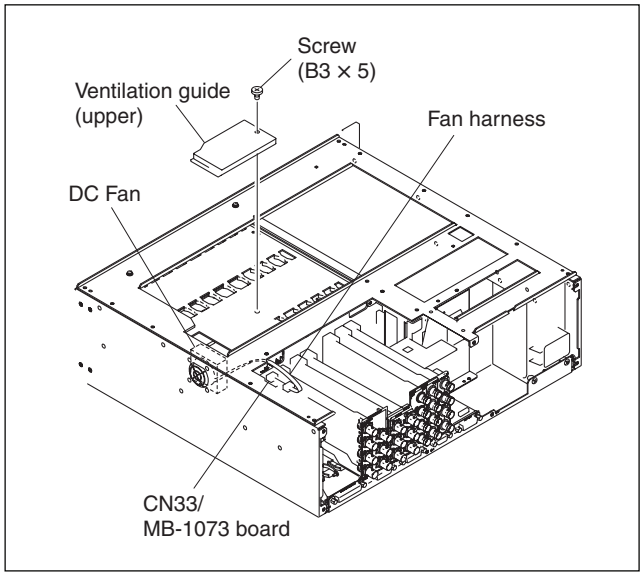


5. Remove the four screws and remove the ventilation guide, DC fan and fan guard.

**Note**

Hold the ventilation guide, DC fan and fan guard when removing them. Otherwise they will drop when unscrewed.

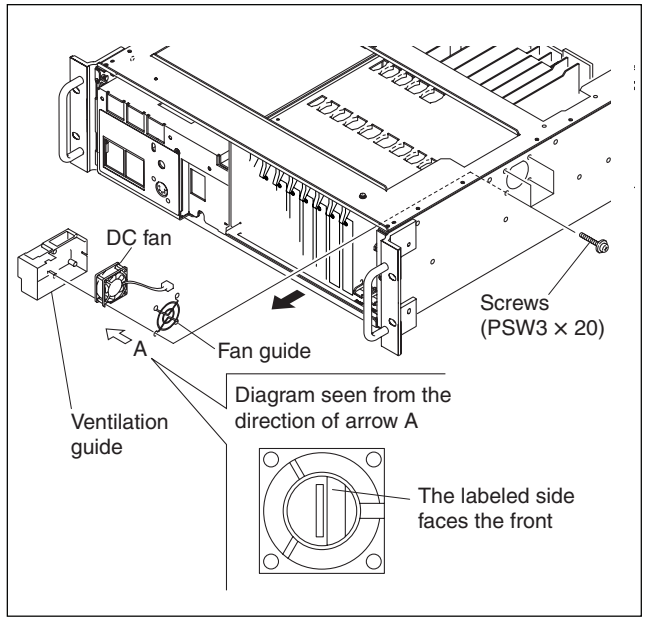


6. Install the DC fan by reversing the steps of removal.

**Note**

Install the DC fan in the orientation shown in the figure above.

## 2-1-8. Replacing the MB-1073 Board

1. Remove the rear panel.
   (Refer to steps 1 to 8 of Section 2-1-4.)
2. Remove all the plug-in boards.
   (Refer to step 2 of Section 2-1-7.)
3. Pull out the HIF-25 board, three HIF-27 boards, SDI-86G board, SDI-85 board and CN-2674G board in the direction of the arrow.

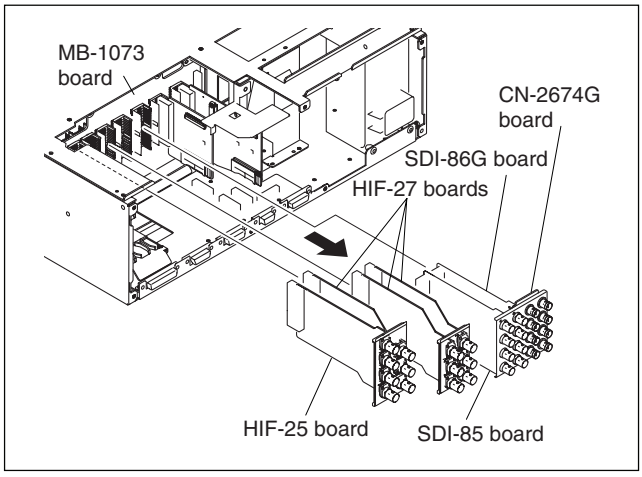


4. Remove the screw that fixes the VIF stopper.
5. Disconnect the two flexible card wires from connectors CN8 and CN9 on the CNB-21G board and pull out the VIF-34G board in the direction of the arrow.
6. Disconnect the flexible card wire from connector CN7 on the CNB-21G board, and pull out the ADO-10G board in the direction of the arrow.

**Note**

Life of flexible card wire will be significantly shortened if it is folded. Be very careful not to fold the flexible card wire.

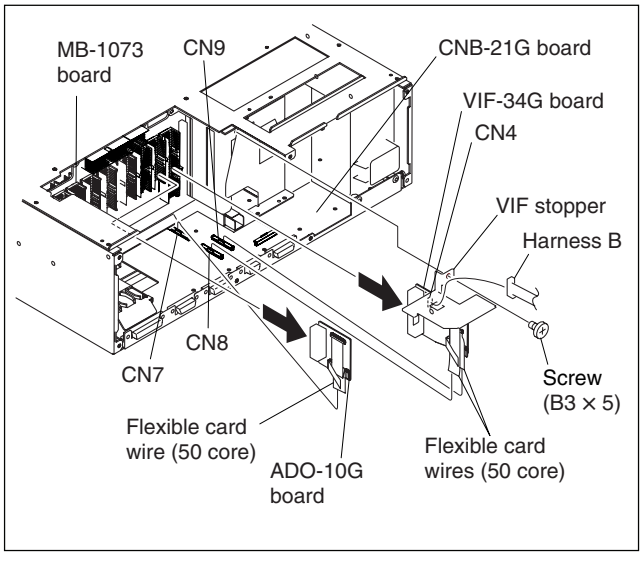


7. Remove the three screws and remove the rear board fixing plate.

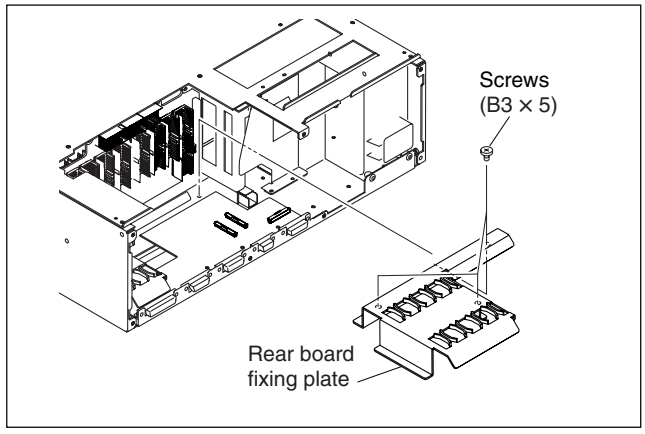


8. Remove the power supply unit.
   (Refer to steps 1 to 5 of Section 2-1-1.)
9. Remove the four rivets and remove the harness guide in the direction of the arrow.
10. Disconnect the harness from the connectors CN31 and CN32 on the MB-1073 board.

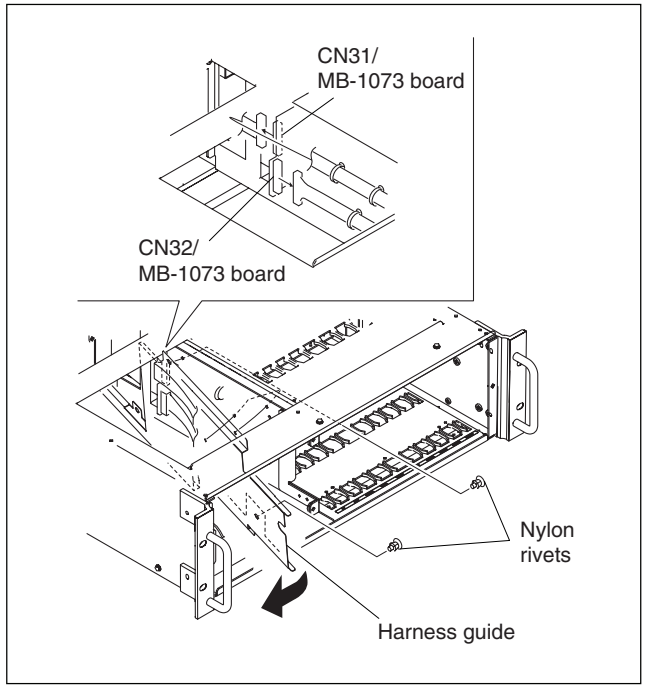

11. Disconnect the harness from the connector CN33 on the MB-1073 board.
12. Remove the eight screws and remove the MB-1073 board.

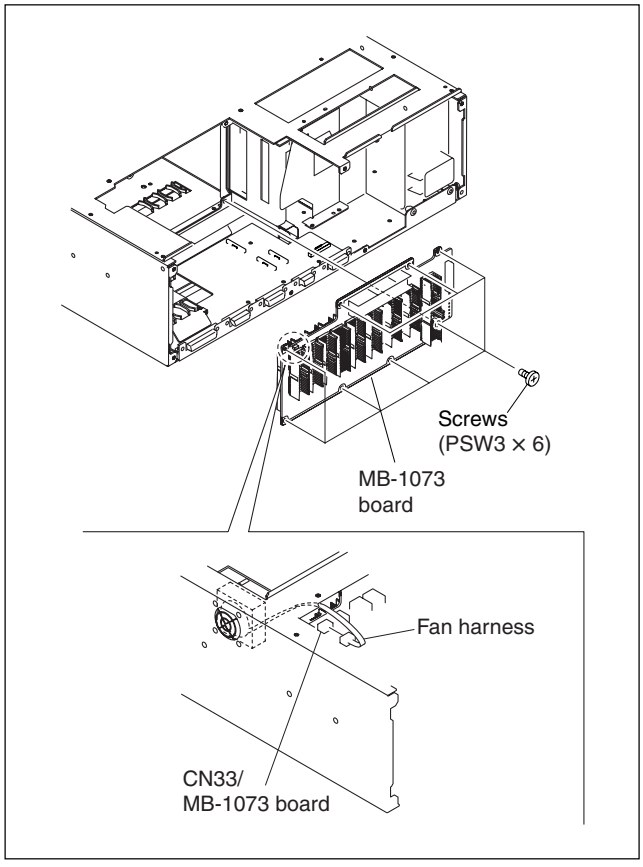


13. Install the MB-1073 board by reversing the steps of removal.

## 2-1-9. Replacing the CNB-21G Board

1. Remove the VIF-34G board and ADO-10 board. (Refer to steps 1 to 6 of Section 2-1-8.)
2. Remove the three screws and remove the rear board fixing plate.
3. Remove the ten hexagonal screws and remove the CNB-21G board.

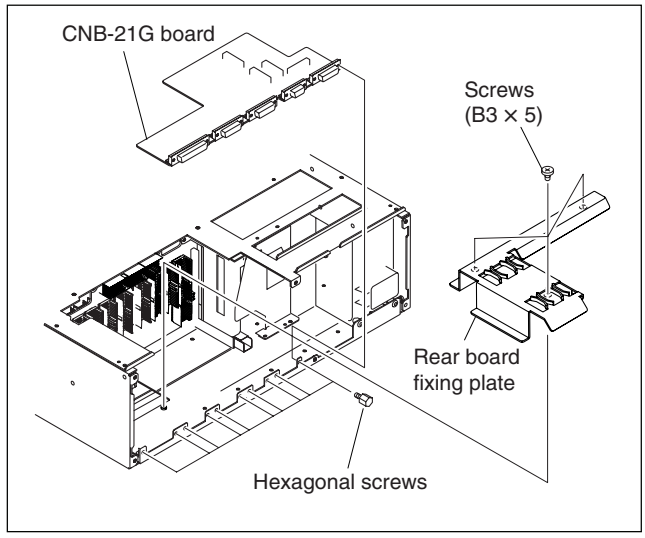


4. Install the CNB-21G board by reversing the steps of removal.

# Section 3
# Electrical Alignment

## 3-1. Preparation

### 3-1-1. Required Equipment

#### Measures

- Digital oscilloscope (300 MHz or higher)
  Tektronix TDS460A or equivalent
- SD waveform/Vector monitor
  Tektronix 1780R or equivalent (for NTSC)
  Tektronix 1781R or equivalent (for PAL)
- SD signal generator
  Tektronix TSG170A or equivalent (for NTSC)
  Tektronix TSG271 or equivalent (for PAL)
- Audio oscillator
  Tektronix SG-5010 or equivalent
- Frequency counter
  Advantest TR5821AK or equivalent

#### Related equipment

- HD color camera (HD super slow motion)
  HDC 3300
- Master setup unit
  MSU-900/950

#### Tools

- Front extension board EX-982
  (Sony P/N : A-1153-700-A)
- Rear extension board EX-983
  (Sony P/N : A-1153-701-A)
- Extension board EX-1002
  (for SDP-15 board extension)
  (Sony P/N : A-1215-624-A)

### 3-1-2. Notes on Adjustments

- Make sure all the measures have already been calibrated.
- Make sure “3-1-4. Initialization Settings” have already been finished.
- Make sure the adjustment of the HDC3300 has already been finished.
- Types of the color bars to be output from the built-in SG:

| Signal format | Y | C |
|---|---|---|
| HD-SDI | 100 % | 100 % |
| SD-SDI (D1) | 100 % | 75 % |
| SD-Composite-analog (HKCU1001) | 75 % | 75 % (SMPTE) |
| SD-Composite-analog (HKCU1001) | 100 % | 75 % (EBU) |

- To adjust HDCU3300, extend each plug-in board. Before pulling out the boards, be sure to turn off the main power.
- Before starting adjustment, warm up for about 10 minutes.
- Before using the MSU-900/950, check the version of the software. For details, refer to Section 1-1, “Checking the ROM and Software Version” of the separate Installation Manual for HDCU3300.

## 3-1-3. Connection of Equipment

### Adjusting the HDCU3300

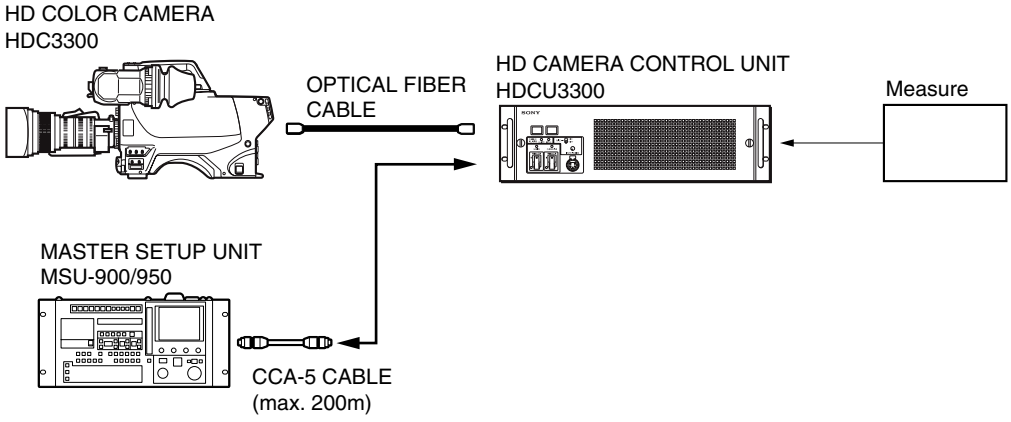


### Adjusting the HKCU1001/1003

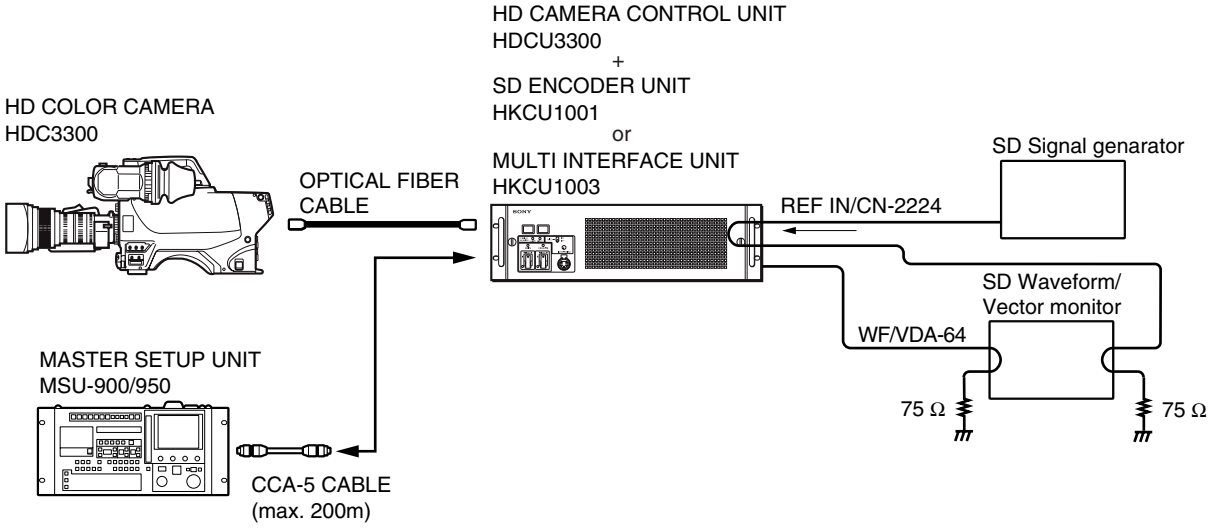

## 3-1-4. Initialization Settings

### HDCU3300

**Note**

When changing the switch settings from the customer's setting positions, it is recommended to write down the customer's setting positions in the following table. After completing the adjustment, be sure to return the switches to the customer's setting positions.

| Board | Switch | Setting during adjustment | Customer setting |
|---|---|---|---|
| AU-302 | S2 | PROD | |
| | S4 | CARBON | |
| AVP-6 | S500 | 0 dB | |
| | S501 | 0 dB | |
| | S600 | RTS | |
| | S601 | RTS | |
| | S602 | RTS | |
| | S603 | RTS | |

Set the switches other than the above to the state when shipped from the factory.
For details of the switch settings, refer to Section 1-6, "On-board Indicator/ Switch/Volume Functions" of the separate Installation Manual.

**When using the MSU-900:**

- Power supply and signal selector block
  - ALL button → OFF (Dark)
  - CAM PW button → ON (Lit)
  - TEST1 button → OFF (Dark)
  - TEST2 button → OFF (Dark)
  - BARS button → OFF (Dark)
  - CLOSE button → ON (Lit)

- Camera/CCU circuit ON/OFF block
  - DETAIL OFF button → OFF (Lit)
  - KNEE OFF button → ON (Dark)
  - AUTO KNEE button → OFF (Dark)
  - MATRIX OFF button → OFF (Lit)

- AUTO SETUP block
  - LEVEL button → OFF (Dark)
  - WHITE button → OFF (Dark)
  - BLACK button → OFF (Dark)

- Others
  - GAMMA OFF button → OFF (Dark)
  - MASTER GAIN selector button → 0

**When using the MSU-950:**

- Power supply and signal selector block
  - ALL button → OFF (Dark)
  - CAM PW button → ON (Lit)
  - TEST button → OFF (Dark)
  - BARS button → OFF (Dark)
  - CLOSE button → ON (Lit)

- AUTO SETUP block
  - LEVEL button → OFF (Dark)
  - WHITE button → OFF (Dark)
  - BLACK button → OFF (Dark)

- Others
  - GAMMA OFF* → ON (Not highlighted)
  - MASTER GAIN* → 0 (0 dB)

* : Press the function button and select it on the function menu display.

## 3-2. Audio System Adjustment

### 3-2-1. Microphone Level Adjustment

Measures : Oscilloscope, Audio oscillator

**Note**

This adjustment is described on the premise that the output impedance of the audio oscillator is 600 Ω.

**Preparation**

- To be extended : AVP-6 board (front side)
- To be extended : AU-298 board (camera side)
- Set CHU MIC GAIN CH1 on page "C05" of the configuration menu to 20 dB.
- Set CHU MIC GAIN CH2 on page "C05" of the configuration menu to 20 dB.
- S500 (F-3)/AVP-6 board → 0 dBu
- S501 (F-3)/AVP-6 board → 0 dBu
- Set the rear microphone on the camera side to MIC for both audio 1 and 2.

**Adjustment Procedure**

1. MIC1 level adjustment
   Input a sine wave of 1 kHz, 220 mV p-p (−20 dBu) from the audio oscillator to 185-pin (X), 183-pin (Y) and 181-pin (G) of the extension board (camera side).

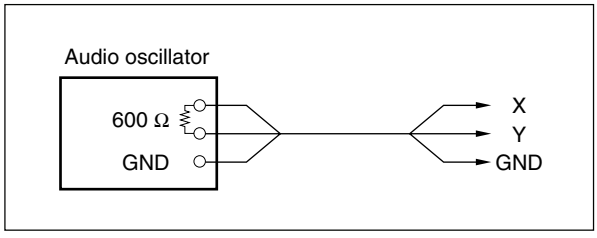


2. Measuring point : TP502 (G-3)/AVP-6 board
   Adjusting point : ◓RV500 (F-3)/AVP-6 board
   Specifications : A = 1100 ±50 mV p-p

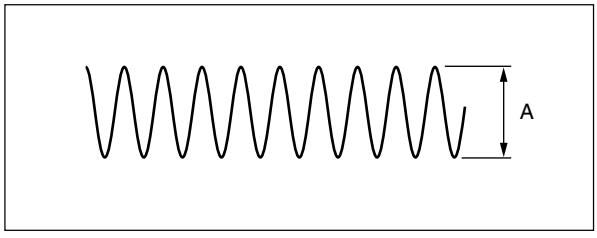


3. Remove the cable that is connected in step 1.

4. MIC2 level adjustment
   Input a sine wave of 1 kHz, 220 mV p-p (−20 dBu) from the audio oscillator to 155-pin (X), 153-pin (Y) and 151-pin (G) of the extension board (camera side).

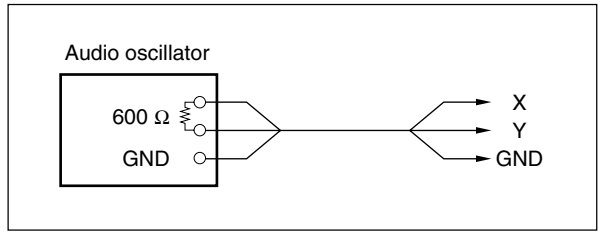


5. Measuring point : TP503 (G-3)/AVP-6 board
   Adjusting point : ◓RV501 (F-3)/AVP-6 board
   Specifications : B = 1100 ±50 mV p-p

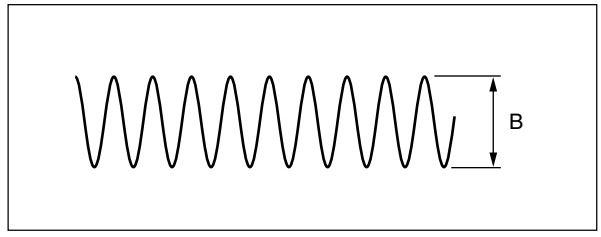


**Setting after Adjustment**

S500 (F-3), S501 (F-3)/AVP-6 board → Return to the original setting.

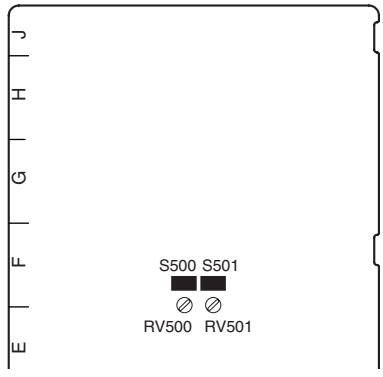


**AVP-6 board (A side)**

## 3-2-2. RTS Intercom Adjustment

Measures : Oscilloscope, Audio oscillator

### Note

- This adjustment is described on the premise that the output impedance of the audio oscillator is 600 Ω.
- When the intercom system is the RTS system, perform this adjustment.

### Preparation

- To be extended : AVP-6 board (front side)
- S4/AU-302 board → CARBON
- S602 (C-3)/AVP-6 board → RTS
- S600 (E-4)/AVP-6 board → RTS
- S603 (C-4)/AVP-6 board → RTS
- S601 (E-4)/AVP-6 board → RTS

HDCU3300

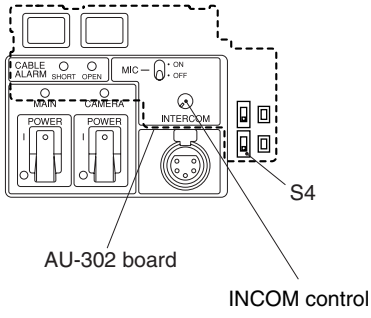


### Adjustment Procedure (PROD CANCEL)

1. S2 (INCOM SELECT)/AU-302 board panel side → PROD
2. Connect a resistance of 200 Ω between a8-pin (CN1 side) and C8-pin of the extension board.
3. Input a sine wave of 1 kHz, 220 mV p-p (−20 dBu) from the audio oscillator to 2-pin (X), 1-pin (Y) and 3-pin (G) of the INCOM connector on the HDCU front panel.

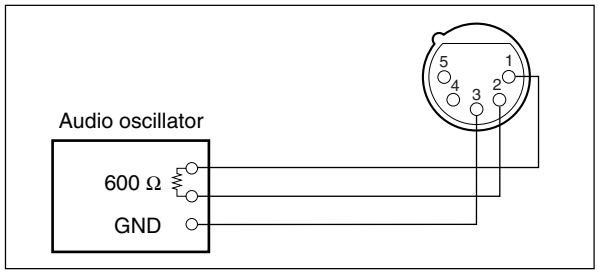


4. PROD CANCEL adjustment
   Measuring point : TP600 (B-4)/AVP-6 board
   Adjusting point : ⊘RV600 (PROD 2WIRE CANCEL)/AVP-6 board panel side
   Specifications : A = Minimize

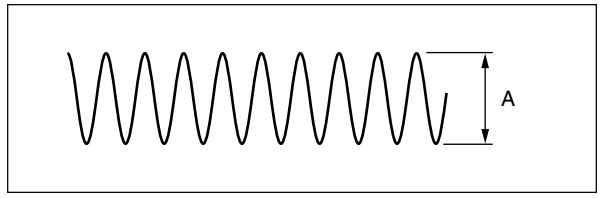


### Adjustment Procedure (ENG CANCEL)

1. S2 (INCOM SELECT)/AU-302 board panel side → ENG
2. Connect a resistance of 200 Ω between a7-pin (CN4 side) and C7-pin of the extension board.
3. Input a sine wave of 1 kHz, 220 mV p-p (−20 dBu) from the audio oscillator to 2-pin (X), 1-pin (Y) and 3-pin (G) of the INCOM connector on the HDCU front panel.

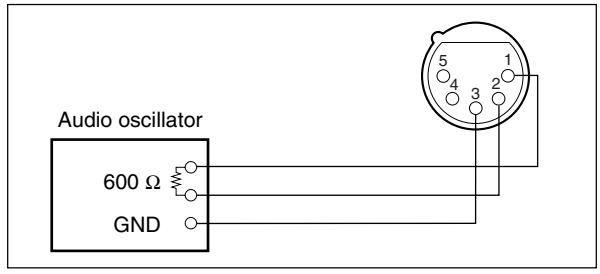


4. Measuring point : TP601 (B-4)/AVP-6 board
   Adjusting point : ⊘RV601 (ENG 2WIRE CANCEL)/AVP-6 board panel side
   Specifications : B = Minimize

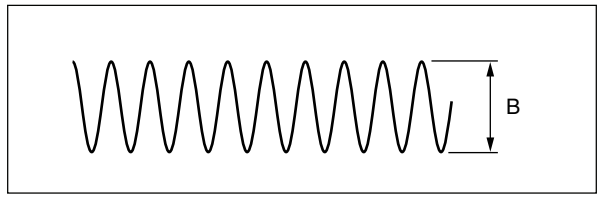


### Setting after Adjustment

After adjustment is completed, return the switches to the original setting.

## 3-3. Video and Reference Signal System Adjustment

### 3-3-1. 27 MHz VCO Free-run Adjustment

Measure : Frequency counter, Oscilloscope

#### Preparation

- To be extended : AT-167S board (front side)
- Remove the cable connected to the REFERENCE IN connector on the HDCU rear panel.
- S401 (REFERENCE)/AT-167S board panel side → SD
- Connect the measure as shown in the following figure.
- After turning on the power, wait for 10 minutes at least and start adjustment.

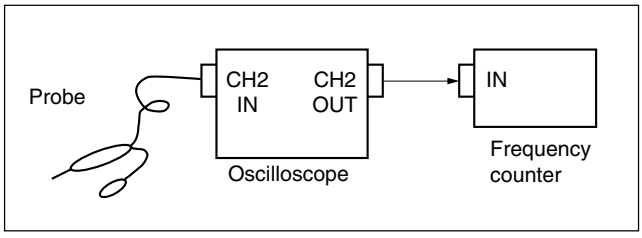


#### Adjustment Procedure

Measuring point : TP704 (F-4)/AT-167S board
Adjusting point : ⊘RV701 (F-2)/AT-167S board
Specifications : 27,000,000 ±10 Hz

#### Setting after Adjustment

After finishing the adjustment, return the switches to the original configuration. Reconnect the disconnected cables.

### 3-3-2. Clock (74 MHz) Duty Adjustment

Measure : Oscilloscope (20 MHz BWLimit: ON)

#### Adjustment Procedure

Measuring point : TP714 (H-1)/AT-167S board
Adjusting point : ⊘RV702 (G-1)/AT-167S board
Specifications : C = 1.60 ±0.04 Vdc

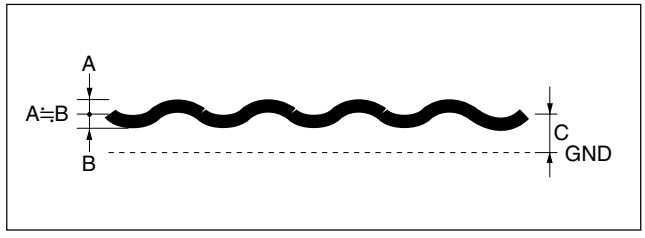


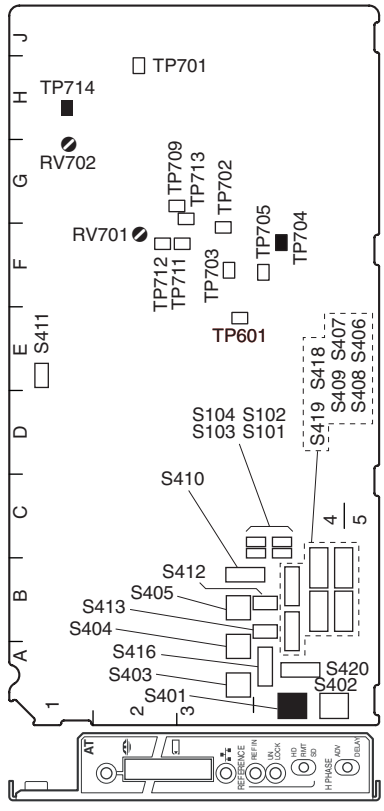


**AT-167S board (A side and panel side)**

### 3-3-3. Prompter 1/2 Level Adjustment

Measures : SD waveform monitor (NTSC or PAL)
SD signal generator (NTSC or PAL)

#### Preparation

Connect the SD signal generator (for NTSC : SMPTE color bar/for PAL : EBU color bar) to the PROMPTER IN connector on the HDCU rear panel.

#### Adjustment Procedure

1. PROMPTER 1 level adjustment
   Measuring point : PROMPTER 1 connector/CAMERA side
   Adjusting point : ◓RV301 (G-1)/DTX-5 board
   Specifications : A = 140 ±1 IRE
   (terminated at 75 Ω) (for NTSC)
   A = 1000 ±7 mV p-p
   (terminated at 75 Ω) (for PAL)

2. PROMPTER 2 level adjustment
   Measuring point : PROMPTER 2 connector/CAMERA side
   Adjusting point : ◓RV701 (G-2)/DTX-5 board
   Specifications : A = 140 ±1 IRE
   (terminated at 75 Ω) (for NTSC)
   A = 1000 ±7 mV p-p
   (terminated at 75 Ω) (for PAL)

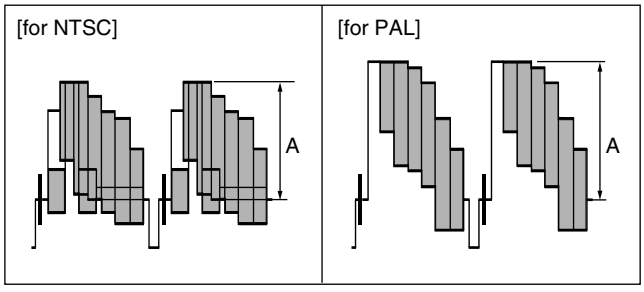


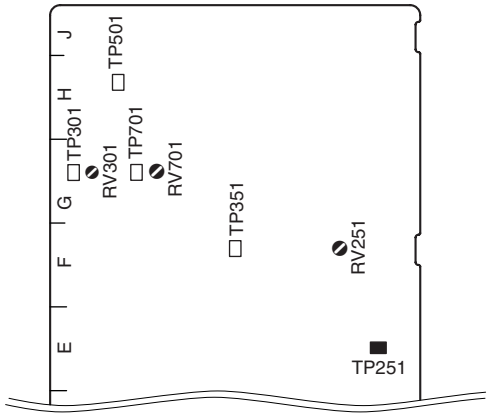


**DTX-5 board (A side)**

## 3-4. Video Signal System Adjustment (Front board)

### 3-4-1. SD-SDI Input VCO Free-run Adjustment

Measure : Frequency counter, Oscilloscope

#### Note

After replacing IC251 on the DTX-5 board only, perform this adjustment.

#### Preparation

- To be extended : DTX-5 board (front side)
- Disconnect the cables connected to the HD SDI1 connector on the HDCU rear panel, and the SD SDI1 connector on the HDCU rear panel.
- Connect the measure as shown in the following figure.
- After turning on the power, wait for 10 minutes at least and start adjustment.

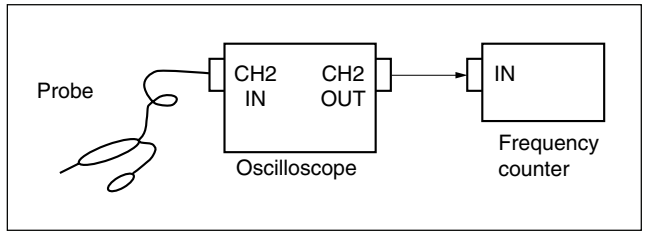


#### Adjustment Procedure

1. Measuring point : TP251 (E-4)/DTX-5 board
   Adjusting point : ◓RV251 (F-4)/DTX-5 board
   Specifications : 27.0 ±0.2 MHz

**Note**

After finishing the adjustment and waiting for 10 minutes at least, confirm that each specification is met.
If the specifications are not met, perform the adjustment again.

#### Setting after Adjustment

After finishing the adjustment, reconnect the disconnected cables.

### 3-4-2. STAIR CASE Adjustment

Measure : Oscilloscope

**Note**

Perform temporarily this adjustment after repairing. When the system is set up, perform the adjustment again according to the characteristic of the waveform monitor.

**Preparation**

To be extended : EN-159A/159B board (front side)

**Adjustment Procedure**

Measuring point : TP305 (E-3)/EN-159A/159B board
Adjusting point : ⊘RV302 (E-4)/EN-159A/159B board
⊘RV301 (E-4)/EN-159A/159B board
Specifications : A = 3.0 ±0.5 V p-p (⊘RV302)
B = 0 ±0.5 V dc (⊘RV301)

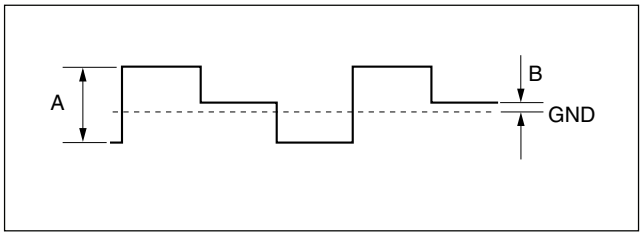


**Settings after Adjustment**

After finishing the adjustment, return the switches to the original setting.

## 3-5. SD Signal System Adjustment

### 3-5-1. VBS Output Level Adjustment

Measures : SD waveform monitor (NTSC or PAL)

**Note**

The adjustment can be performed using VBS on page "C09" of the configuration menu (Fine-adjustment can be performed when used as a system.)

**Preparation**

To be extended : EN-159A/159B board (front side)

**Adjustment Procedure**

1. Video level adjustment
   Measuring point : VBS OUT connector/VDA-64A board
   Adjusting point : ⊘RV303 (F-3)/EN-159A/159B board
   Specifications : A = 100 ±1 IRE
   (terminated at 75 Ω) (for NTSC)
   A = 700 ±7 mV
   (terminated at 75 Ω) (for PAL)

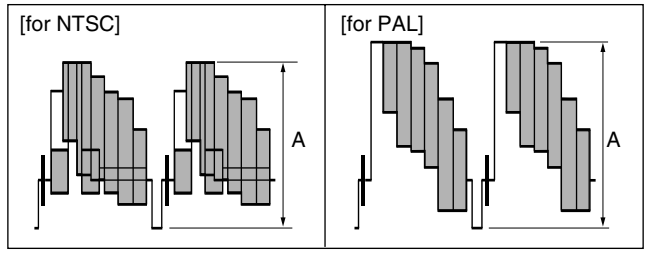


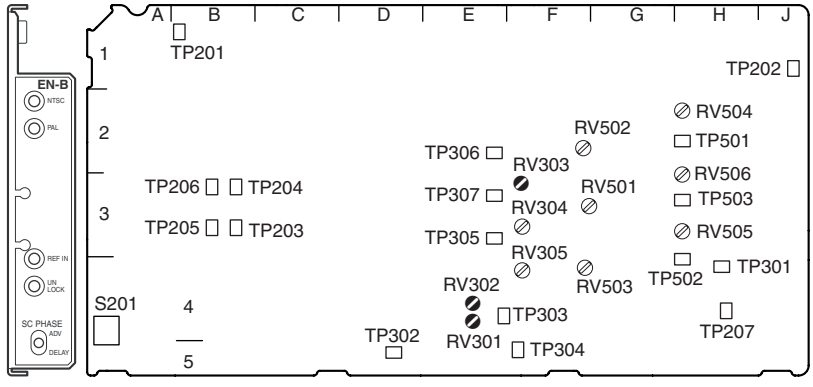


**EN-159A/159B board (A side and panel side)**

## 3-5-2. PIX Output Level Adjustment

Measures : SD waveform monitor (NTSC or PAL)

### Note

The adjustment can be performed using PIX on page "C09" of the configuration menu. (Fine-adjustment can be performed when used as a system.)

### Preparation

To be extended : EN-159A/159B board (front side)

### Adjustment Procedure

1. Video level adjustment
   Measuring point : PIX OUT connector/VDA-64A board
   Adjusting point : ⊘RV304 (F-3)/EN-159A/159B board
   Specifications : A = 100 ±1 IRE
   (terminated at 75 Ω) (for NTSC)
   A = 700 ±7 mV
   (terminated at 75 Ω) (for PAL)

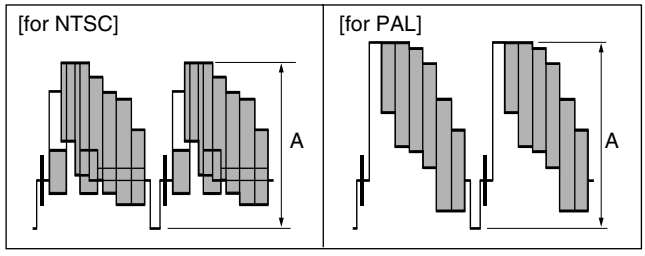


## 3-5-3. WF Output Level Adjustment

Measures : SD waveform monitor (NTSC or PAL)

### Note

The adjustment can be performed using WFM on page "C09" of the configuration menu. (Fine-adjustment can be performed when used as a system.)

### Preparation

To be extended : EN-159A/159B board (front side)

### Adjustment Procedure

1. Video level adjustment
   Measuring point : WF OUT connector/VDA-64A board
   Adjusting point : ⊘RV305 (F-4)/EN-159A/159B board
   Specifications : A = 100 ±1 IRE
   (terminated at 75 Ω) (for NTSC)
   A = 700 ±7 mV
   (terminated at 75 Ω) (for PAL)

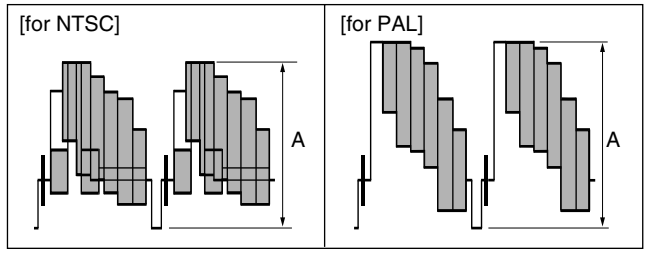


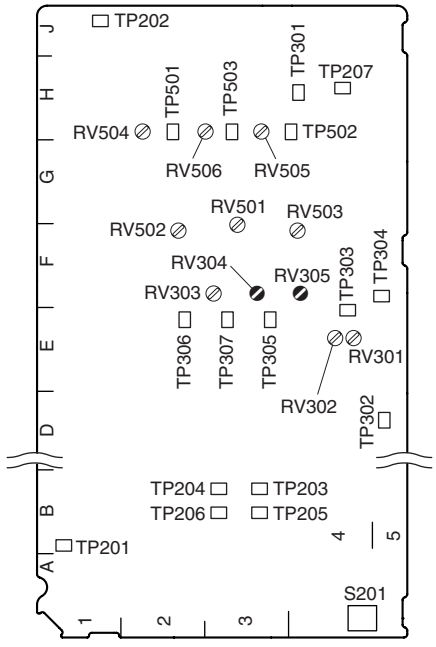


**EN-159A/159B board (A side)**

# Section 4
# Spare Parts

## 4-1. Notes on Repair Parts

### 1. Safety Related Components Warning

**WARNING**

Components marked ⚠ are critical to safe operation. Therefore, specified parts should be used in the case of replacement.

### 2. Standardization of Parts

Some repair parts supplied by Sony differ from those used for the unit. These are because of parts commonality and improvement.
Parts list has the present standardized repair parts.

### 3. Stock of Parts

Parts marked with “o” at SP (Supply Code) column of the spare parts list may not be stocked. Therefore, the delivery date will be delayed.

### 4. Harness

Harnesses with no part number are not registered as spare parts.

## 4-1. 補修部品注意事項

### 1. 安全重要部品

⚠警告

⚠印のついた部品は安全性を維持するために重要な部品です。したがって，交換する時は必ず指定の部品を使ってください。

### 2. 部品の共通化

ソニーから供給する補修用部品は，セットに使われているものと異なることがあります。
これは部品の共通化，改良等によるものです。
部品表には現時点での共通化された補修用部品が記載されています。

### 3. 部品の在庫

部品表のSP (Supply code) 欄に“o”で示される部品は在庫していないことがあり，納期が長くなることがあります。

### 4. ハーネス

部品番号が記載されていないハーネスは，サービス部品として登録されていません。

## 4-2. Exploded Views

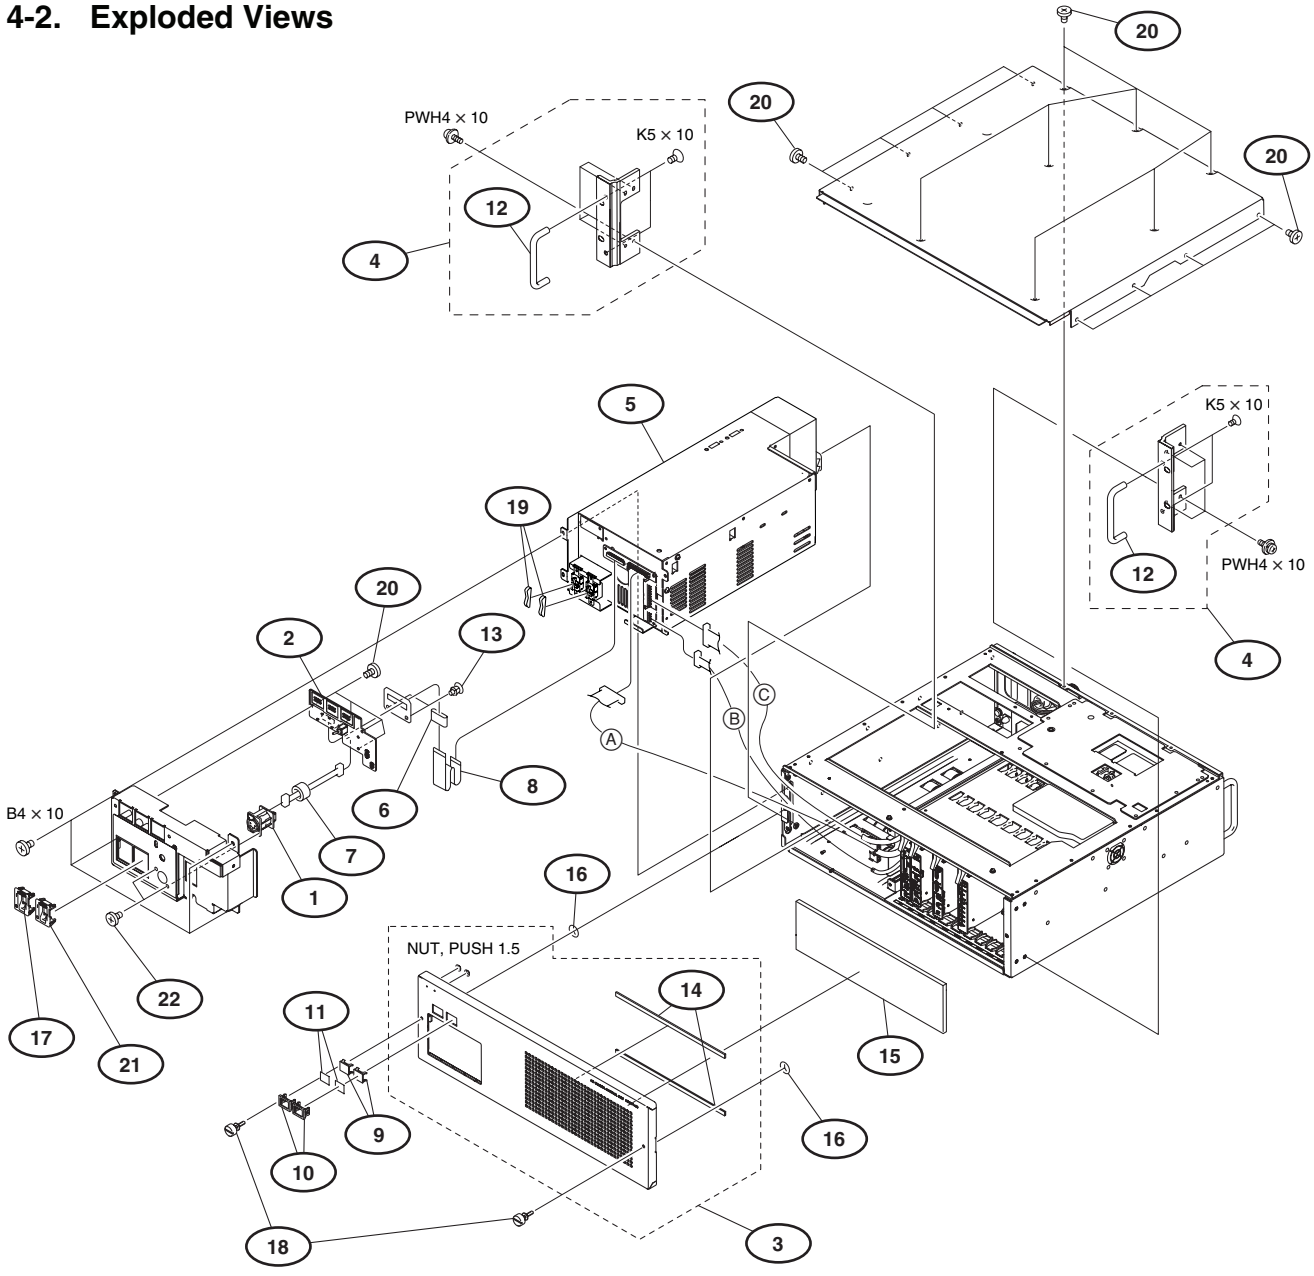


| No. | Part No. | SP | Description |
|---|---|---|---|
| 1 | A-1129-236-A | s | MOUNTED CIRCUIT BOARD, CN-2700 |
| 2 | A-1129-307-A | s | MOUNTED CIRCUIT BOARD, AU-302 |
| 3 | X-3704-909-2 | s | FRONT PANEL SUB ASSY (SSM) |
| 4 | X-3704-918-1 | s | ANGLE (3U) ASSY, RACK |
| 5 | ⚠ 1-468-945-21 | s | REGULATOR, SWITCHING (POWER SUPPLY UNIT) |
| 6 | 1-500-418-11 | s | CORE |
| 7 | 1-543-751-11 | o | CORE (TROIDAL) |
| 8 | 1-831-657-11 | s | CABLE, FLEXIBLE FLAT (26 CORE) |
| 9 | 2-139-192-01 | s | FRAME, INDICATOR WINDOW |
| 10 | 2-139-193-02 | s | WINDOW, INDICATOR |
| 11 | 2-249-353-01 | s | COVER, LAMP |
| 12 | 2-378-801-01 | s | HANDLE |
| 13 | 3-531-576-21 | s | RIVET |
| 14 | 3-602-574-01 | o | TAPE2, ADHENSIVE |
| 15 | 3-628-958-01 | o | FILTER |
| 16 | 3-650-537-01 | o | WASHER |
| 17 | 3-681-054-01 | o | POWER SW GUARD |
| 18 | 3-687-887-01 | s | SCREW (M4X20) |
| 19 | 3-688-814-01 | s | CAP, SWITCH |
| 20 | 3-725-295-21 | s | SCREW, (+) (B3) |
| 21 | 3-992-925-01 | s | SW GUARD |
| 22 | 4-674-315-01 | s | SCREW (M2.6X6) |
| | 7-624-200-01 | s | NUT, PUSH 1.5 |
| | 7-682-275-09 | s | SCREW, +K 5X10 |
| | 7-682-562-04 | s | SCREW, +B 4X10 |
| | 7-682-904-21 | s | SCREW, +PWH 4X10 |

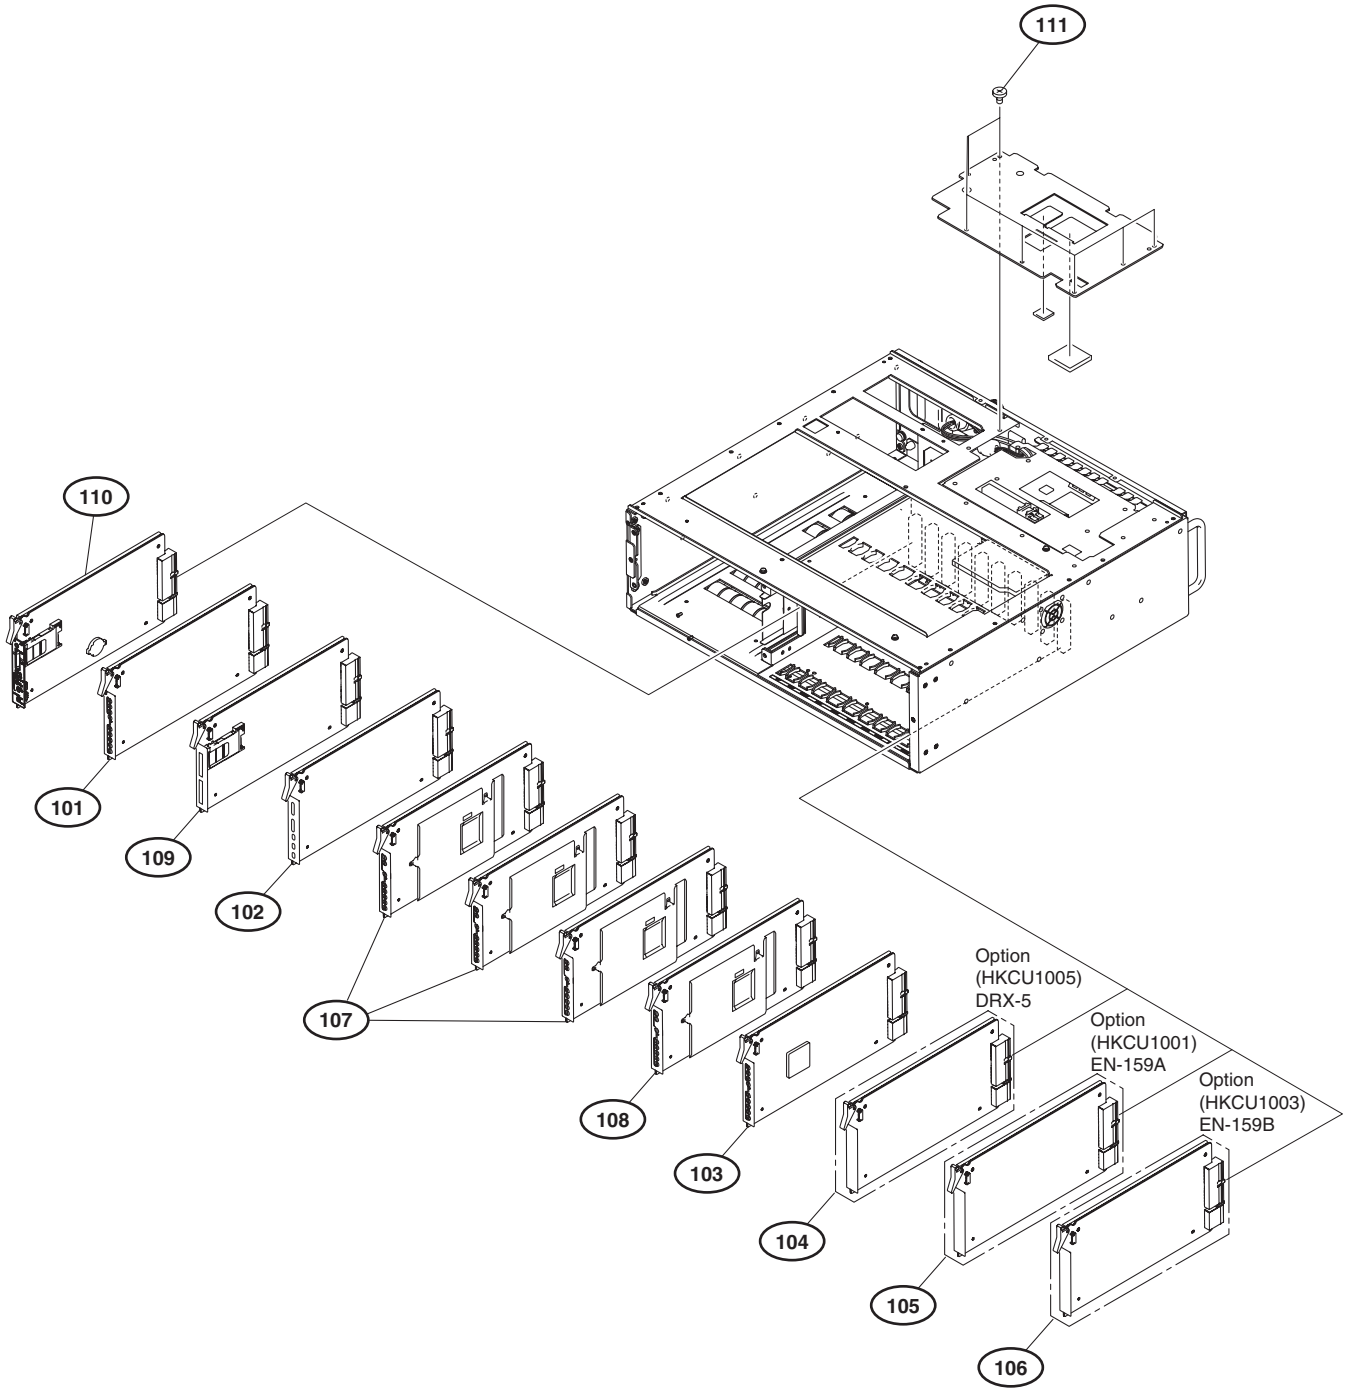


| No. | Part No. | SP | Description |
|---|---|---|---|
| 101 | A-1129-300-A | s | MOUNTED CIRCUIT BOARD, AVP-6 |
| 102 | A-1129-301-A | s | MOUNTED CIRCUIT BOARD, DTX-5 |
| 103 | A-1129-302-A | s | MOUNTED CIRCUIT BOARD, DRX-5 |
| 104 | A-1129-302-A | s | MOUNTED CIRCUIT BOARD, DRX-5 (OPTION) |
| 105 | A-1132-789-A | s | MOUNTED CIRCUIT BOARD, EN-159A (OPTION) |
| 106 | A-1132-790-A | s | MOUNTED CIRCUIT BOARD, EN-159B (OPTION) |
| 107 | A-1206-289-A | s | MOUNTED CIRCUIT BOARD, DPR-271A |
| 108 | A-1206-290-A | s | MOUNTED CIRCUIT BOARD, DPR-271B |
| 109 | A-1206-292-A | s | MOUNTED CIRCUIT BOARD, CPU-395 |
| 110 | A-1207-222-A | s | MOUNTED CIRCUIT BOARD, AT-167S |
| 111 | 3-725-295-21 | s | SCREW, (+) (B3) |

## Rear Panel Section

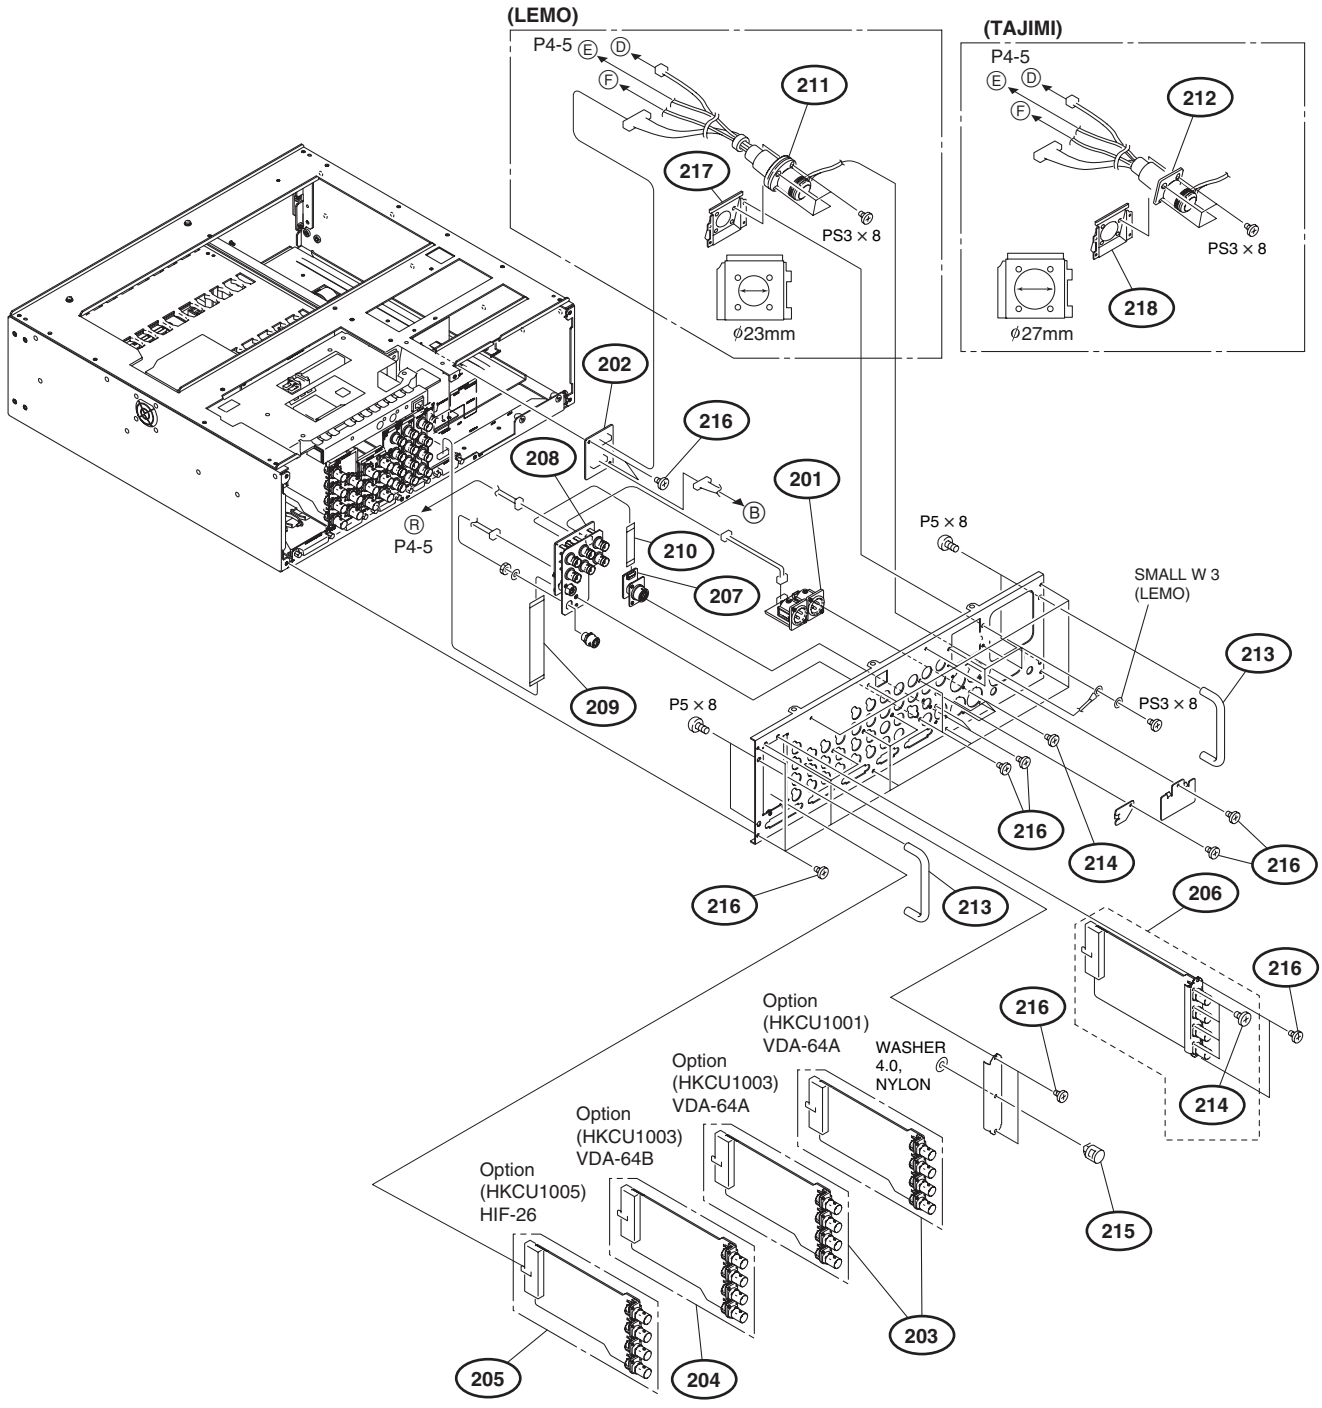


| No. | Part No. | SP | Description |
|---|---|---|---|
| 201 | A-1129-232-A | s | MOUNTED CIRCUIT BOARD, CN-2673 |
| 202 | A-1129-237-A | s | MOUNTED CIRCUIT BOARD, CN-2718 |
| 203 | A-1132-791-A | s | MOUNTED CIRCUIT BOARD, VDA-64A (OPTION) |
| 204 | A-1132-792-A | s | MOUNTED CIRCUIT BOARD, VDA-64B (OPTION) |
| 205 | A-1132-794-A | s | MOUNTED CIRCUIT BOARD, HIF-26 (OPTION) |
| 206 | A-1132-794-A | s | MOUNTED CIRCUIT BOARD, HIF-26 |
| 207 | A-1161-079-A | s | MOUNTED CIRCUIT BOARD, CN-2805G |
| 208 | A-1161-081-A | s | MOUNTED CIRCUIT BOARD, CN-2672G |
| 209 | 1-831-664-11 | s | CABLE, FLEXIBLE FLAT (50 CORE) |
| 210 | 1-831-666-11 | s | CABLE, FLEXIBLE FLAT (15 CORE) |
| 211 | ⚠ 1-833-305-11 | s | CABLE ASSEMBLY, ENCAPSULAT (F) (LEMO) |
| 212 | ⚠ 1-833-440-11 | s | OPTICAL MULTI CABLE ASSEMBLY (TAJIMI) |

| No. | Part No. | SP | Description |
|---|---|---|---|
| 213 | 2-378-801-01 | s | HANDLE |
| 214 | 3-364-941-01 | s | SCREW (+B) (2.6X5), NYLOK |
| 215 | 3-682-057-11 | s | SPACER (SMALL) |
| 216 | 3-725-295-21 | s | SCREW, (+) (B3) |
| 217 | 3-872-863-02 | s | FIBER CN HOLDER (LEMO) |
| 218 | 3-986-571-01 | s | FIBER CN HOLDER (TAJIMI) |
| | 7-623-925-11 | s | WASHER 4.0, NYLON |
| | 7-682-174-01 | s | SCREW, +P 5X8 |
| | 7-682-648-01 | s | SCREW, +PS 3X8 |
| | 7-688-003-03 | s | W 3, SMALL (LEMO) |

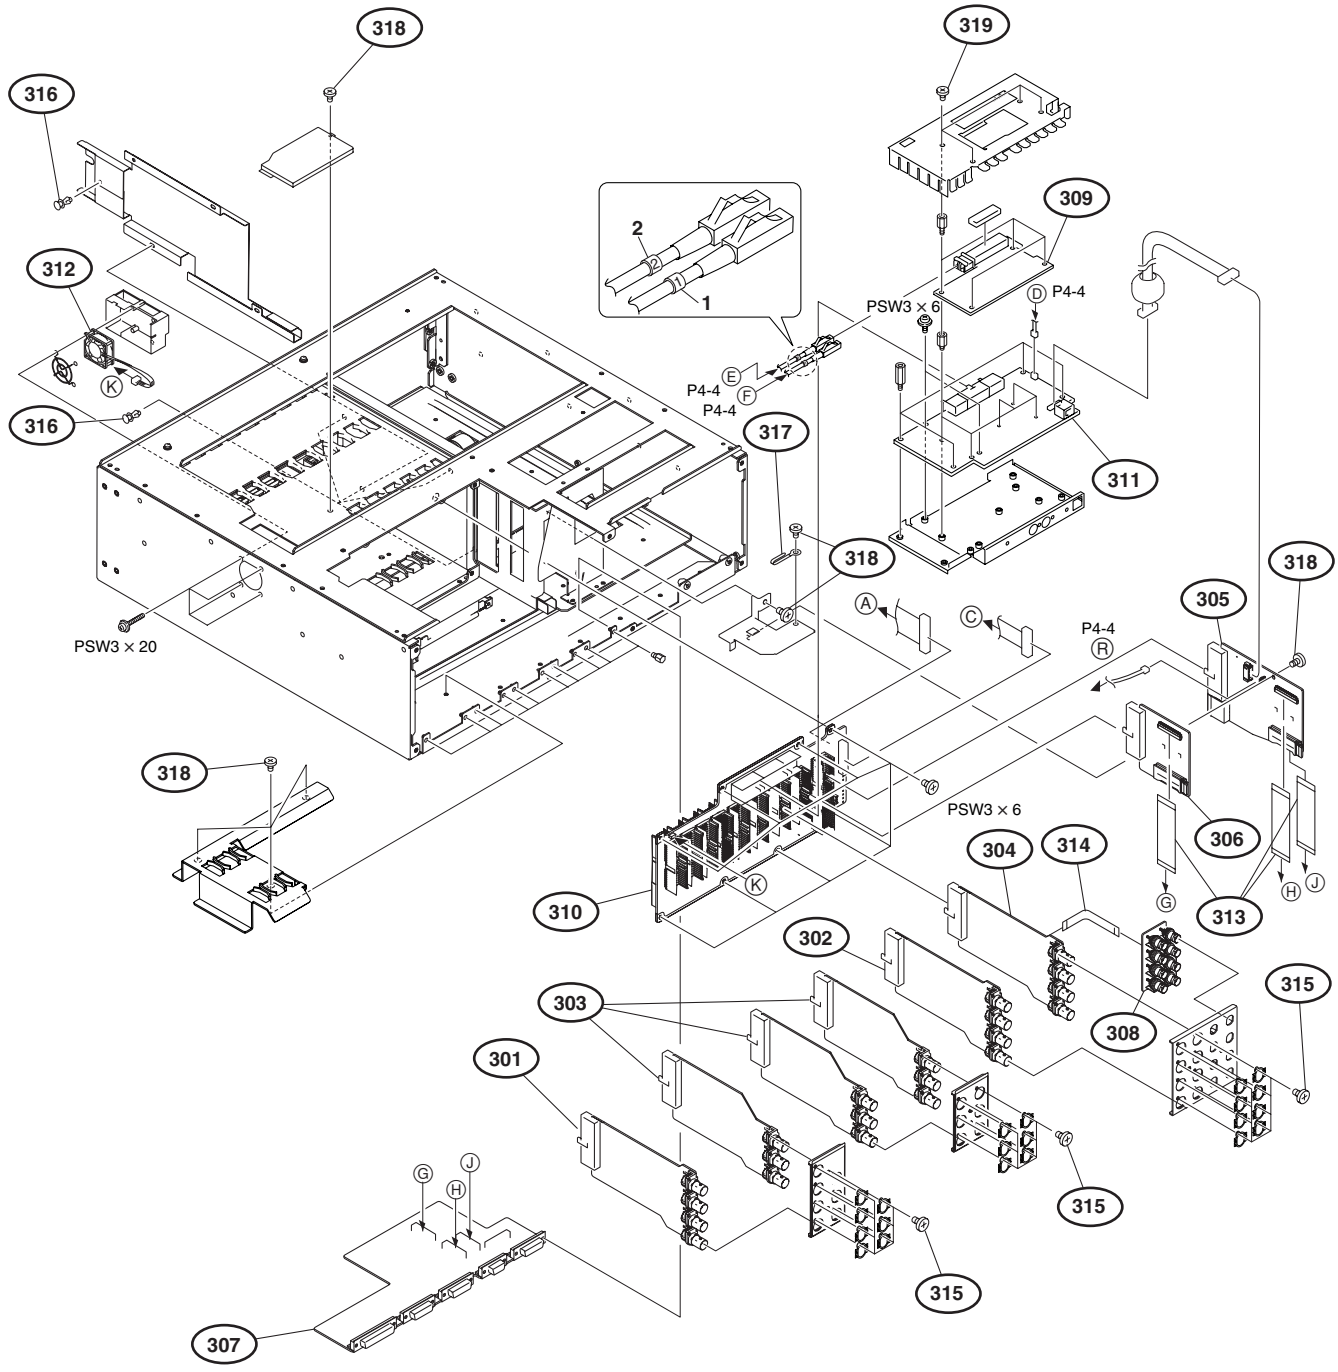


| No. | Part No. | SP | Description |
|---|---|---|---|
| 301 | A-1129-304-A | s | MOUNTED CIRCUIT BOARD, HIF-25 |
| 302 | A-1129-305-A | s | MOUNTED CIRCUIT BOARD, SDI-85 |
| 303 | A-1129-308-A | s | MOUNTED CIRCUIT BOARD, HIF-27 |
| 304 | A-1161-074-A | s | MOUNTED CIRCUIT BOARD, SDI-86G |
| 305 | A-1161-076-A | s | MOUNTED CIRCUIT BOARD, VIF-34G |
| 306 | A-1161-078-A | s | MOUNTED CIRCUIT BOARD, ADO-10G |
| 307 | A-1161-080-A | s | MOUNTED CIRCUIT BOARD, CNB-21G |
| 308 | A-1161-082-A | s | MOUNTED CIRCUIT BOARD, CN-2674G |
| 309 | A-1206-238-A | s | MOUNTED CIRCUIT BOARD, OTR-1 |
| 310 | A-1206-286-A | s | MOUNTED CIRCUIT BOARD, MB-1073 |
| 311 | A-1206-291-A | s | MOUNTED CIRCUIT BOARD, SDP-15 |
| 312 | ⚠ 1-763-256-21 | s | FAN, DC |

| No. | Part No. | SP | Description |
|---|---|---|---|
| 313 | 1-831-087-11 | s | CABLE, FLEXIBLE FLAT (50 CORE) |
| 314 | 1-831-666-11 | s | CABLE, FLEXIBLE FLAT (15 CORE) |
| 315 | 3-364-941-01 | s | SCREW (+B) (2.6X5), NYLOK |
| 316 | 3-531-576-21 | s | RIVET |
| 317 | 3-701-822-01 | s | HOLDER, WIRE |
| 318 | 3-725-295-21 | s | SCREW, (+) (B3) |
| 319 | 4-674-315-01 | s | SCREW (M2.6X6) |
| | 7-682-947-01 | s | SCREW +PSW 3X6 |
| | 7-682-953-01 | s | SCREW +PSW 3X20 |

## 4-3. Electrical Parts List

ADO-10G BOARD

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| 1pc | A-1161-078-A | s | MOUNTED CIRCUIT BOARD, ADO-10G |
| CN2 | 1-778-451-31 | s | CONNECTOR, FFC/FPC(ZIF) AN 50P |

AT-167S BOARD

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| 1pc | A-1207-222-A | s | MOUNTED CIRCUIT BOARD, AT-167S |
| 1pc | ⚠ 1-528-174-11 | s | BATTERY, LITHIUM (CR2032 TYPE) |
| 4pcs | 7-682-947-01 | s | SCREW +PSW 3X6 |
| BT101 | 1-756-076-21 | s | HOLDER, LITHIUM BATTERY |
| C1 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C2 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C3 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C4 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C5 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C6 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C7 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C8 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C9 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C10 | 1-127-573-91 | s | CAP, CHIP CERAMIC 1MF B (2012) |
| C11 | 1-127-573-91 | s | CAP, CHIP CERAMIC 1MF B (2012) |
| C12 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C13 | 1-126-391-21 | s | CAP, CHIP ELECT 47MF (5X5.7) |
| C14 | 1-126-396-21 | s | CAP, CHIP ELECT 47MF (6.3X5.7) |
| C15 | 1-126-396-21 | s | CAP, CHIP ELECT 47MF (6.3X5.7) |
| C16 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C18 | 1-164-874-81 | s | CAP,CHIP CERAMIC 100PF CH 1005 |
| C19 | 1-164-874-81 | s | CAP,CHIP CERAMIC 100PF CH 1005 |
| C20 | 1-164-874-81 | s | CAP,CHIP CERAMIC 100PF CH 1005 |
| C21 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C22 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C23 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C24 | 1-164-874-81 | s | CAP,CHIP CERAMIC 100PF CH 1005 |
| C25 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C26 | 1-164-874-81 | s | CAP,CHIP CERAMIC 100PF CH 1005 |
| C28 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C29 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C30 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C31 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C33 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C34 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C35 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C37 | 1-126-391-21 | s | CAP, CHIP ELECT 47MF (5X5.7) |
| C38 | 1-126-391-21 | s | CAP, CHIP ELECT 47MF (5X5.7) |
| C39 | 1-126-391-21 | s | CAP, CHIP ELECT 47MF (5X5.7) |
| C41 | 1-126-391-21 | s | CAP, CHIP ELECT 47MF (5X5.7) |
| C101 | 1-164-874-81 | s | CAP,CHIP CERAMIC 100PF CH 1005 |
| C102 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C103 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C104 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C105 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C107 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C108 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C109 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C110 | 1-104-905-11 | s | CAP, DOUBLE LAYERS 0.22F |
| C111 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C112 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C113 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C115 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C117 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C118 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C119 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C120 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C121 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |

(AT-167S BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C122 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C123 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C124 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C125 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C126 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C127 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C128 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C129 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C130 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C131 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C132 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C133 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C134 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C135 | 1-164-935-81 | s | CAP, CHIP CERAMIC 470PF B 1005 |
| C136 | 1-164-935-81 | s | CAP, CHIP CERAMIC 470PF B 1005 |
| C137 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C138 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C139 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C140 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C141 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C142 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C143 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C144 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C145 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C146 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C147 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C148 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C149 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C150 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C151 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C152 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C153 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C154 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C155 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C156 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C157 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C158 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C159 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C160 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C161 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C162 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C163 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C164 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C165 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C166 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C167 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C168 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C169 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C170 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C171 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C172 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C173 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C174 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C175 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C176 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C177 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C178 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C179 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C180 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |

(AT-167S BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C181 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C182 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C183 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C184 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C185 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C186 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C187 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C188 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C189 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C190 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C191 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C192 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C193 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C194 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C195 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C301 | 1-164-862-81 | s | CAP, CHIP CERAMIC 33PF CH 1005 |
| C302 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C303 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C304 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C305 | 1-164-862-81 | s | CAP, CHIP CERAMIC 33PF CH 1005 |
| C306 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C307 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C308 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C309 | 1-126-391-21 | s | CAP, CHIP ELECT 47MF (5X5.7) |
| C310 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C311 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C312 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C313 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C314 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C315 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C316 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C317 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C318 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C319 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C320 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C321 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C323 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C324 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C325 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C326 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C327 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C328 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C329 | 1-164-937-81 | s | CAP, CHIPCERAMIC 1000PF B 1005 |
| C330 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C331 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C332 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C333 | 1-164-937-81 | s | CAP, CHIPCERAMIC 1000PF B 1005 |
| C334 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C335 | 1-164-937-81 | s | CAP, CHIPCERAMIC 1000PF B 1005 |
| C336 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C337 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C338 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C339 | 1-164-937-81 | s | CAP, CHIPCERAMIC 1000PF B 1005 |
| C340 | 1-164-937-81 | s | CAP, CHIPCERAMIC 1000PF B 1005 |
| C341 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C342 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C343 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C344 | 1-164-850-81 | s | CAP, CHIP CERAMIC 10PF CH 1005 |
| C350 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |

(AT-167S BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C351 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C352 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C353 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C354 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C355 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C356 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C401 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C402 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C403 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C404 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C407 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C408 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C409 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C410 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C413 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C414 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C415 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C416 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C417 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C418 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C419 | 1-164-874-81 | s | CAP,CHIP CERAMIC 100PF CH 1005 |
| C601 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C602 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C605 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C606 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C607 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C608 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C609 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C610 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C611 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C612 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C613 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C614 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C615 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C616 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C617 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C618 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C619 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C620 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C621 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C622 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C623 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C624 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C625 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C626 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C627 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C628 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C629 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C630 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C631 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C632 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C701 | 1-126-391-21 | s | CAP, CHIP ELECT 47MF (5X5.7) |
| C702 | 1-126-391-21 | s | CAP, CHIP ELECT 47MF (5X5.7) |
| C703 | 1-164-866-81 | s | CAP, CHIP CERAMIC 47PF CH 1005 |
| C704 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C705 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C706 | 1-164-850-81 | s | CAP, CHIP CERAMIC 10PF CH 1005 |
| C708 | 1-164-858-81 | s | CAP, CHIP CERAMIC 22PF CH 1005 |
| C709 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |

(AT-167S BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C710 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C711 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C712 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C713 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C716 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C717 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C718 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C719 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C720 | 1-164-937-81 | s | CAP, CHIPCERAMIC 1000PF B 1005 |
| C721 | 1-164-937-81 | s | CAP, CHIPCERAMIC 1000PF B 1005 |
| C722 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C723 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C724 | 1-164-874-81 | s | CAP,CHIP CERAMIC 100PF CH 1005 |
| C725 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C726 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C727 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C728 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C729 | 1-164-874-81 | s | CAP,CHIP CERAMIC 100PF CH 1005 |
| C730 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C731 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C732 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C733 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C734 | 1-164-874-81 | s | CAP,CHIP CERAMIC 100PF CH 1005 |
| C735 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C736 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C738 | 1-126-391-21 | s | CAP, CHIP ELECT 47MF (5X5.7) |
| C739 | 1-164-850-81 | s | CAP, CHIP CERAMIC 10PF CH 1005 |
| C740 | 1-126-391-21 | s | CAP, CHIP ELECT 47MF (5X5.7) |
| C741 | 1-164-882-81 | s | CAP,CHIP CERAMIC 220PF CH 1005 |
| C742 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C743 | 1-164-882-81 | s | CAP,CHIP CERAMIC 220PF CH 1005 |
| C744 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C745 | 1-125-891-91 | s | CAP, CHIP CERAMIC0.47MF B 1608 |
| C746 | 1-126-391-21 | s | CAP, CHIP ELECT 47MF (5X5.7) |
| C747 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C748 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C749 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C750 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C751 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C752 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C753 | 1-126-391-21 | s | CAP, CHIP ELECT 47MF (5X5.7) |
| C754 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C755 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C756 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C757 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C758 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C759 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C760 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C761 | 1-164-878-81 | s | CAP,CHIP CERAMIC 150PF CH 1005 |
| C762 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C763 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C764 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C765 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C766 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C767 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C768 | 1-127-956-21 | s | CAP, CHIP FILM 0.1MF (3225) |
| C769 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C770 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C771 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |

(AT-167S BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C772 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C773 | 1-127-956-21 | s | CAP, CHIP FILM 0.1MF (3225) |
| C774 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C775 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C776 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C777 | 1-164-937-81 | s | CAP, CHIPCERAMIC 1000PF B 1005 |
| C778 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C779 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C780 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C781 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C782 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C783 | 1-164-850-81 | s | CAP, CHIP CERAMIC 10PF CH 1005 |
| C784 | 1-164-850-81 | s | CAP, CHIP CERAMIC 10PF CH 1005 |
| C785 | 1-164-850-81 | s | CAP, CHIP CERAMIC 10PF CH 1005 |
| C786 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C787 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C789 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C790 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C791 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C792 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C793 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C796 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C798 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C799 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C801 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C802 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C803 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C804 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C805 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C806 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C807 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C808 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C809 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C810 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C811 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C812 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C813 | 1-125-891-91 | s | CAP, CHIP CERAMIC0.47MF B 1608 |
| C814 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C815 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C816 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C817 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C818 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C819 | 1-164-858-81 | s | CAP, CHIP CERAMIC 22PF CH 1005 |
| C820 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C821 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C822 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C823 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C827 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C829 | 1-164-878-81 | s | CAP,CHIP CERAMIC 150PF CH 1005 |
| C830 | 1-126-391-21 | s | CAP, CHIP ELECT 47MF (5X5.7) |
| C831 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C833 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C834 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C835 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C836 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C837 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C840 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C841 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C842 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |

(AT-167S BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C843 | 1-127-956-21 | s | CAP, CHIP FILM 0.1MF (3225) |
| C844 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C845 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C846 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C847 | 1-127-956-21 | s | CAP, CHIP FILM 0.1MF (3225) |
| C848 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C849 | 1-127-956-21 | s | CAP, CHIP FILM 0.1MF (3225) |
| C850 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C851 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C852 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C853 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C854 | 1-164-937-81 | s | CAP, CHIPCERAMIC 1000PF B 1005 |
| C855 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C856 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C857 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C858 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C859 | 1-164-850-81 | s | CAP, CHIP CERAMIC 10PF CH 1005 |
| C860 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C861 | 1-164-874-81 | s | CAP,CHIP CERAMIC 100PF CH 1005 |
| C862 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C863 | 1-164-850-81 | s | CAP, CHIP CERAMIC 10PF CH 1005 |
| C864 | 1-164-850-81 | s | CAP, CHIP CERAMIC 10PF CH 1005 |
| C865 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C866 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C867 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C868 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C870 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C871 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C873 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C874 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C875 | 1-164-845-81 | s | CAP, CHIP CERAMIC 5PF CH 1005 |
| C876 | 1-164-845-81 | s | CAP, CHIP CERAMIC 5PF CH 1005 |
| CN103 | 1-794-917-11 | s | CONNECTOR, MEMORY STICK |
| CN104 | 1-793-093-91 | o | CONNECTOR, BOARD TO BOARD 60P |
| CN301 | 1-573-290-21 | s | PIN, CONNECTOR (1.5MM) (SMD)4P |
| CN601 | 1-764-093-21 | o | PIN, CONNECTOR (PC BOARD) 8P |
| D1 | 8-719-017-03 | s | DIODE 02DZ4.7-TPH3 |
| D2 | 8-719-017-03 | s | DIODE 02DZ4.7-TPH3 |
| D4 | 8-719-074-31 | s | DIODE CL-196YG-CD-T |
| D101 | 8-719-820-42 | s | DIODE 1SS302-TE85L |
| D102 | 8-719-070-20 | s | DIODE RB706F-40 |
| D103 | 8-719-820-42 | s | DIODE 1SS302-TE85L |
| D104 | 8-719-820-42 | s | DIODE 1SS302-TE85L |
| D105 | 8-719-820-42 | s | DIODE 1SS302-TE85L |
| D106 | 8-719-820-42 | s | DIODE 1SS302-TE85L |
| D107 | 8-719-820-42 | s | DIODE 1SS302-TE85L |
| D401 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D402 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D403 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D404 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D405 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D406 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D407 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D408 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D409 | 8-719-074-31 | s | DIODE CL-196YG-CD-T |
| D410 | 8-719-077-09 | s | DIODE CL-196HR-CD-T |
| D411 | 8-719-027-83 | s | DIODE CL-155UR/G-DT |
| D412 | 8-719-027-83 | s | DIODE CL-155UR/G-DT |

(AT-167S BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| D416 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D417 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D418 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D419 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D420 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D421 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D422 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D423 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D425 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D427 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D428 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D429 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D701 | 8-719-820-42 | s | DIODE 1SS302-TE85L |
| D702 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D703 | 8-719-820-42 | s | DIODE 1SS302-TE85L |
| D704 | 8-719-820-42 | s | DIODE 1SS302-TE85L |
| D705 | 8-719-820-42 | s | DIODE 1SS302-TE85L |
| D706 | 8-719-820-42 | s | DIODE 1SS302-TE85L |
| D707 | 8-719-820-42 | s | DIODE 1SS302-TE85L |
| D708 | 8-719-820-42 | s | DIODE 1SS302-TE85L |
| D709 | 8-719-070-20 | s | DIODE RB706F-40 |
| E1 | 1-535-877-22 | s | CHIP, CHECKER |
| E2 | 1-535-877-22 | s | CHIP, CHECKER |
| E4 | 1-535-877-22 | s | CHIP, CHECKER |
| FB701 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB702 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB703 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB704 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| IC1 | 6-704-976-01 | s | IC ADR381ARTZ-REEL7 |
| IC2 | 6-700-655-01 | s | IC LT1963ES8#TR |
| IC3 | 8-759-327-01 | s | IC NJM062V(TE2) |
| IC4 | 8-759-327-01 | s | IC NJM062V(TE2) |
| IC6 | 8-759-338-95 | s | IC NJM2903V(TE2) |
| IC101 | 6-710-018-01 | s | IC CAT24C02WI-GT3 |
| IC102 | 8-759-523-01 | s | IC TC74HC4052AFT(EL) |
| IC103 | 8-759-363-26 | s | IC RN5VD28AA-TL-FA |
| IC104 | 8-759-669-71 | s | IC PCF8591T/2 |
| IC105 | 8-759-648-04 | s | IC RTC-4574JE |
| IC106 | 8-759-669-44 | s | IC SN74LVC74APWR-12 |
| IC107 | 6-703-461-11 | s | IC CY2309ZXC-1HT |
| IC108 | 6-706-488-01 | s | IC TC7SH14FU(T5RSOYJF) |
| IC110 | 6-706-487-01 | s | IC TC7SH08FU(T5RSOYJF) |
| IC111 | 8-759-669-42 | s | IC SN74LVC138APWR-12 |
| IC112 | 8-759-669-42 | s | IC SN74LVC138APWR-12 |
| IC113 | 8-759-669-42 | s | IC SN74LVC138APWR-12 |
| IC114 | 8-759-669-68 | s | IC SN74CBT3253PWR-12 |
| IC116 | 6-706-487-01 | s | IC TC7SH08FU(T5RSOYJF) |
| IC118 | 8-759-557-85 | s | IC NC7SZ32P5X |
| IC119 | 6-705-721-01 | s | IC MT48LC8M16A2P-75-Y15WTR |
| IC120 | 6-705-721-01 | s | IC MT48LC8M16A2P-75-Y15WTR |
| IC121 | 8-759-669-42 | s | IC SN74LVC138APWR-12 |
| IC122 | 6-704-988-01 | s | IC FM18L08-70-STR |
| IC123 | 6-704-988-01 | s | IC FM18L08-70-STR |
| IC124 | 8-759-543-64 | s | IC NC7SZ08P5X |
| IC125 | 8-759-669-44 | s | IC SN74LVC74APWR-12 |
| IC126 | 8-759-557-84 | s | IC NC7SZ04P5X |
| IC127 | 8-759-557-84 | s | IC NC7SZ04P5X |
| IC128 | 8-759-543-64 | s | IC NC7SZ08P5X |

(AT-167S BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| IC129 | 8-759-584-32 | s | IC MB86189PFV-G-BND-ER-E1 |
| IC130 | 6-706-484-01 | s | IC TC7SH04FU(T5RSOYJF) |
| IC131 | 8-759-327-01 | s | IC NJM062V(TE2) |
| IC132 | 6-706-484-01 | s | IC TC7SH04FU(T5RSOYJF) |
| IC133 | 6-706-488-01 | s | IC TC7SH14FU(T5RSOYJF) |
| IC134 | 6-706-488-01 | s | IC TC7SH14FU(T5RSOYJF) |
| IC135 | 6-706-483-01 | s | IC TC7SH02FU(T5RSOYJF) |
| IC136 | 6-706-488-01 | s | IC TC7SH14FU(T5RSOYJF) |
| IC137 | 8-759-472-43 | s | IC 74VHC245MTCX |
| IC138 | 8-759-472-43 | s | IC 74VHC245MTCX |
| IC139 | 8-759-472-43 | s | IC 74VHC245MTCX |
| IC140 | 8-759-472-43 | s | IC 74VHC245MTCX |
| IC141 | 8-759-679-55 | s | IC SN74LVC08APWR |
| IC142 | 8-759-679-55 | s | IC SN74LVC08APWR |
| IC143 | 8-759-679-55 | s | IC SN74LVC08APWR |
| IC144 | 8-759-327-01 | s | IC NJM062V(TE2) |
| IC145 | 8-759-669-66 | s | IC TLC272CPWR-12 |
| IC146 | 8-759-543-64 | s | IC NC7SZ08P5X |
| IC147 | 8-759-543-64 | s | IC NC7SZ08P5X |
| IC148 | 8-759-543-64 | s | IC NC7SZ08P5X |
| IC149 | 8-759-679-55 | s | IC SN74LVC08APWR |
| IC150 | 8-759-543-64 | s | IC NC7SZ08P5X |
| IC151 | 6-706-487-01 | s | IC TC7SH08FU(T5RSOYJF) |
| IC301 | 8-759-594-17 | o | IC CXD9093R |
| IC302 | 6-706-487-01 | s | IC TC7SH08FU(T5RSOYJF) |
| IC303 | 6-706-484-01 | s | IC TC7SH04FU(T5RSOYJF) |
| IC304 | 8-759-594-17 | o | IC CXD9093R |
| IC305 | 6-702-691-01 | s | IC BCM5221A4KPT |
| IC306 | 8-759-531-92 | s | IC TC7WH04FU(TE12R) |
| IC307 | 8-759-471-91 | s | IC 74VHC04MTCX |
| IC308 | 8-759-092-83 | s | IC SN75158PSR |
| IC309 | 6-706-487-01 | s | IC TC7SH08FU(T5RSOYJF) |
| IC401 | 8-752-392-03 | s | IC CXD1095BR |
| IC402 | 6-706-357-01 | s | IC LTC1664IGN#TR |
| IC403 | 8-759-662-38 | s | IC 74VHCT08AMTCX |
| IC406 | 8-759-531-92 | s | IC TC7WH04FU(TE12R) |
| IC407 | 8-752-392-03 | s | IC CXD1095BR |
| IC408 | 8-759-472-43 | s | IC 74VHC245MTCX |
| IC409 | 8-759-531-92 | s | IC TC7WH04FU(TE12R) |
| IC410 | 8-759-471-96 | s | IC 74VHC08MTCX |
| IC411 | 8-759-471-96 | s | IC 74VHC08MTCX |
| IC602 | 8-759-363-26 | s | IC RN5VD28AA-TL-FA |
| IC607 | 6-706-487-01 | s | IC TC7SH08FU(T5RSOYJF) |
| IC701 | 8-759-561-46 | s | IC AD8014ARTZ-REEL7 |
| IC702 | 8-759-327-14 | s | IC TL712CPSR |
| IC703 | 8-759-327-14 | s | IC TL712CPSR |
| IC704 | 8-759-327-14 | s | IC TL712CPSR |
| IC705 | 8-759-344-12 | s | IC GS4981CTAE3 |
| IC706 | 8-759-669-41 | s | IC SN74LVC125APWR-12 |
| IC707 | 8-759-662-38 | s | IC 74VHCT08AMTCX |
| IC708 | 8-759-485-24 | s | IC MC74HC4046ADTR2 |
| IC709 | 8-759-184-65 | s | IC TC4W66FU(TE12R) |
| IC710 | 8-759-564-49 | s | IC TC7W53FU(TE12R) |
| IC711 | 8-759-564-49 | s | IC TC7W53FU(TE12R) |
| IC712 | 8-759-675-47 | s | IC SN74LVC04APWR |
| IC713 | 8-759-675-47 | s | IC SN74LVC04APWR |
| IC715 | 8-759-675-47 | s | IC SN74LVC04APWR |
| IC717 | 6-700-804-01 | s | IC SN74LVC574APWR |
| IC718 | 8-759-564-49 | s | IC TC7W53FU(TE12R) |

(AT-167S BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| IC719 | 8-759-344-12 | s | IC GS4981CTAE3 |
| IC720 | 8-759-327-14 | s | IC TL712CPSR |
| IC722 | 8-759-485-24 | s | IC MC74HC4046ADTR2 |
| IC723 | 8-759-564-49 | s | IC TC7W53FU(TE12R) |
| IC724 | 8-759-564-49 | s | IC TC7W53FU(TE12R) |
| IC726 | 6-700-804-01 | s | IC SN74LVC574APWR |
| IC727 | 8-759-471-91 | s | IC 74VHC04MTCX |
| IC728 | 8-759-561-46 | s | IC AD8014ARTZ-REEL7 |
| IC729 | 8-759-669-41 | s | IC SN74LVC125APWR-12 |
| IC730 | 8-759-675-47 | s | IC SN74LVC04APWR |
| IC732 | 8-759-669-66 | s | IC TLC272CPWR-12 |
| IC733 | 8-759-669-66 | s | IC TLC272CPWR-12 |
| IC734 | 8-759-669-66 | s | IC TLC272CPWR-12 |
| IC735 | 8-759-669-66 | s | IC TLC272CPWR-12 |
| IC736 | 8-759-669-66 | s | IC TLC272CPWR-12 |
| IC737 | 8-759-669-66 | s | IC TLC272CPWR-12 |
| IC738 | 8-759-669-66 | s | IC TLC272CPWR-12 |
| IC739 | 6-706-484-01 | s | IC TC7SH04FU(T5RSOYJF) |
| IC740 | 8-759-669-41 | s | IC SN74LVC125APWR-12 |
| IC741 | 8-759-663-35 | s | IC 74VHC4053MTCX |
| IC742 | 8-759-663-35 | s | IC 74VHC4053MTCX |
| IC743 | 8-759-523-04 | s | IC TC74HC4538AFT(EL) |
| IC744 | 6-706-476-01 | s | IC TC7SET04FU(T5RSOJF) |
| IC745 | 6-706-476-01 | s | IC TC7SET04FU(T5RSOJF) |
| IC746 | 6-706-489-01 | s | IC TC7SH32FU(T5RSOYJF) |
| IC747 | 6-706-478-01 | s | IC TC7SET08FU(T5RSOJF) |
| IC748 | 6-706-478-01 | s | IC TC7SET08FU(T5RSOJF) |
| IC749 | 8-759-523-04 | s | IC TC74HC4538AFT(EL) |
| IC750 | 8-759-669-41 | s | IC SN74LVC125APWR-12 |
| IC751 | 6-706-484-01 | s | IC TC7SH04FU(T5RSOYJF) |
| IC752 | 6-706-489-01 | s | IC TC7SH32FU(T5RSOYJF) |
| IC753 | 6-706-484-01 | s | IC TC7SH04FU(T5RSOYJF) |
| IC755 | 6-706-484-01 | s | IC TC7SH04FU(T5RSOYJF) |
| IC756 | 8-759-531-92 | s | IC TC7WH04FU(TE12R) |
| IC757 | 6-706-478-01 | s | IC TC7SET08FU(T5RSOJF) |
| IC758 | 6-706-478-01 | s | IC TC7SET08FU(T5RSOJF) |
| IC759 | 8-759-592-42 | s | IC TC7SZ00FU(TE85R) |
| IC760 | 8-759-592-42 | s | IC TC7SZ00FU(TE85R) |
| IC761 | 8-759-592-42 | s | IC TC7SZ00FU(TE85R) |
| IC762 | 8-759-592-42 | s | IC TC7SZ00FU(TE85R) |
| L1 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L101 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L102 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L103 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L104 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L105 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L106 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L107 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L108 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L109 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L110 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L111 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L113 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L114 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L301 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L302 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L303 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L304 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L305 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |

(AT-167S BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| L401 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L601 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L602 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L701 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L702 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L703 | 1-414-396-41 | s | INDUCTOR (SMD) 4.7UH |
| L704 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L705 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L706 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L707 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L708 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L709 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L710 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L711 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L712 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L713 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L714 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L715 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L716 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L717 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L718 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L719 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L720 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L724 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L725 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L726 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L727 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L728 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L729 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L730 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L733 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L734 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L735 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L736 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L737 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L738 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L739 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L740 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L741 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L742 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L743 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| PH1 | 8-749-011-37 | s | PHOTO COUPLER TLP181(BL-TPR) |
| PH301 | 8-749-014-35 | s | IC HCPL-0630-500 |
| PH302 | 8-749-014-35 | s | IC HCPL-0630-500 |
| Q1 | 8-729-035-99 | s | TRANSISTOR 2SA1615-Z-E2 |
| Q2 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q3 | 8-729-209-73 | s | TRANSISTOR 2SA1213Y-TE12L |
| Q4 | 8-729-209-77 | s | TRANSISTOR 2SC2873Y-TE12L |
| Q5 | 6-551-380-01 | s | TRANSISTOR SI4425BDY-T1 |
| Q6 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q101 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q102 | 8-729-209-73 | s | TRANSISTOR 2SA1213Y-TE12L |
| Q301 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q401 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q402 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q403 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q404 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q405 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |

(AT-167S BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| Q406 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q407 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q408 | 8-729-928-25 | s | TRANSISTOR 2SA1774TL-QR |
| Q409 | 8-729-928-25 | s | TRANSISTOR 2SA1774TL-QR |
| Q410 | 8-729-928-25 | s | TRANSISTOR 2SA1774TL-QR |
| Q411 | 8-729-928-25 | s | TRANSISTOR 2SA1774TL-QR |
| Q412 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q413 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q414 | 8-729-928-25 | s | TRANSISTOR 2SA1774TL-QR |
| Q415 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q416 | 8-729-928-25 | s | TRANSISTOR 2SA1774TL-QR |
| Q417 | 8-729-928-25 | s | TRANSISTOR 2SA1774TL-QR |
| Q418 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q419 | 8-729-928-25 | s | TRANSISTOR 2SA1774TL-QR |
| Q701 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q702 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q703 | 8-729-928-25 | s | TRANSISTOR 2SA1774TL-QR |
| Q704 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q705 | 8-729-142-11 | s | TRANSISTOR 2SA1226-T1E3E4 |
| Q706 | 8-729-928-25 | s | TRANSISTOR 2SA1774TL-QR |
| Q707 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q708 | 8-729-142-11 | s | TRANSISTOR 2SA1226-T1E3E4 |
| Q709 | 8-729-928-25 | s | TRANSISTOR 2SA1774TL-QR |
| Q710 | 8-729-928-25 | s | TRANSISTOR 2SA1774TL-QR |
| R1 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R2 | 1-208-875-81 | s | RES, CHIP 330 (1005) |
| R3 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R4 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R5 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R6 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R7 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R8 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R9 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R10 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R11 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R12 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R13 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R14 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R15 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R16 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R17 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R18 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R19 | 1-208-907-81 | s | RES, CHIP 6.8K (1005) |
| R20 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R22 | 1-208-931-81 | s | RES, CHIP 68K (1005) |
| R23 | 1-208-931-81 | s | RES, CHIP 68K (1005) |
| R33 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R34 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R35 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R36 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R41 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R43 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R44 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R48 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R49 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R50 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R51 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R101 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R102 | 1-208-911-81 | s | RES, CHIP 10K (1005) |

(AT-167S BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R103 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R104 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R105 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R106 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R107 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R108 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R109 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R110 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R111 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R112 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R113 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R115 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R116 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R117 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R118 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R119 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R120 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R121 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R122 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R123 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R124 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R125 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R128 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R129 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R130 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R131 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R132 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R133 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R134 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R135 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R136 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R137 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R139 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R140 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R142 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R144 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R147 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R148 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R150 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R151 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R152 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R153 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R154 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R155 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R156 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R157 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R158 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R159 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R160 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R161 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R162 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R163 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R164 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R165 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R166 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R167 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R168 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R169 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R170 | 1-208-911-81 | s | RES, CHIP 10K (1005) |

(AT-167S BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R171 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R172 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R173 | 1-220-878-81 | s | RES, CHIP 22 (1005) |
| R174 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R175 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R176 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R177 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R178 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R179 | 1-220-878-81 | s | RES, CHIP 22 (1005) |
| R180 | 1-220-878-81 | s | RES, CHIP 22 (1005) |
| R181 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R182 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R183 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R184 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R185 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R186 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R187 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R188 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R189 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R190 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R191 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R192 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R193 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R194 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R195 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R196 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R197 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R198 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R199 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R200 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R201 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R202 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R203 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R204 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R205 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R206 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R207 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R209 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R210 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R211 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R212 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R213 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R214 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R215 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R216 | 1-220-878-81 | s | RES, CHIP 22 (1005) |
| R217 | 1-220-878-81 | s | RES, CHIP 22 (1005) |
| R218 | 1-220-878-81 | s | RES, CHIP 22 (1005) |
| R219 | 1-220-878-81 | s | RES, CHIP 22 (1005) |
| R220 | 1-220-878-81 | s | RES, CHIP 22 (1005) |
| R221 | 1-220-878-81 | s | RES, CHIP 22 (1005) |
| R222 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R223 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R224 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R225 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R227 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R228 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R229 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R230 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R231 | 1-208-899-81 | s | RES, CHIP 3.3K (1005) |

(AT-167S BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R232 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R233 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R234 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R235 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R236 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R237 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R240 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R241 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R242 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R243 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R245 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R246 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R247 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R301 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R302 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R303 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R304 | 1-208-907-81 | s | RES, CHIP 6.8K (1005) |
| R305 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R306 | 1-208-907-81 | s | RES, CHIP 6.8K (1005) |
| R307 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R308 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R309 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R310 | 1-220-882-81 | s | RES, CHIP 33 (1005) |
| R311 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R312 | 1-208-907-81 | s | RES, CHIP 6.8K (1005) |
| R313 | 1-208-907-81 | s | RES, CHIP 6.8K (1005) |
| R314 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R315 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R316 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R317 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R318 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R319 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R320 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R321 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R322 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R323 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R324 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R325 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R326 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R327 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R328 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R329 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R330 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R331 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R332 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R333 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R334 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R335 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R337 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R338 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R339 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R340 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R341 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R342 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R343 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R344 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R345 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R346 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R347 | 1-220-878-81 | s | RES, CHIP 22 (1005) |

(AT-167S BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R348 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R349 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R350 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R351 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R352 | 1-220-882-81 | s | RES, CHIP 33 (1005) |
| R353 | 1-220-882-81 | s | RES, CHIP 33 (1005) |
| R354 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R355 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R356 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R357 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R358 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R359 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R360 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R361 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R362 | 1-208-891-81 | s | RES, CHIP 1.5K (1005) |
| R363 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R364 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R401 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R402 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R403 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R404 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R405 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R406 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R407 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R408 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R409 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R410 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R411 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R412 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R413 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R414 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R415 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R416 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R417 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R418 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R419 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R420 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R421 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R422 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R423 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R424 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R425 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R426 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R427 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R430 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R431 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R432 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R433 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R434 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R435 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R436 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R437 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R438 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R440 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R441 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R442 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R445 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R446 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R447 | 1-208-863-81 | s | RES, CHIP 100 (1005) |

(AT-167S BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R448 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R449 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R450 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R451 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R452 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R453 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R454 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R455 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R456 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R457 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R458 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R459 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R460 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R461 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R462 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R463 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R464 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R467 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R468 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R469 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R470 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R471 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R472 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R473 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R474 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R476 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R477 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R478 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R479 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R480 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R481 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R482 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R483 | 1-208-875-81 | s | RES, CHIP 330 (1005) |
| R484 | 1-208-875-81 | s | RES, CHIP 330 (1005) |
| R485 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R486 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R487 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R488 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R489 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R490 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R492 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R493 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R494 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R495 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R496 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R497 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R498 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R499 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R500 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R501 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R502 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R503 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R504 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R505 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R506 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R507 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R508 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R509 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R510 | 1-208-927-81 | s | RES, CHIP 47K (1005) |

(AT-167S BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R511 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R512 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R513 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R514 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R515 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R516 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R517 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R518 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R519 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R520 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R521 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R522 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R601 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R602 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R603 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R604 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R605 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R606 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R607 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R608 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R609 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R610 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R611 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R614 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R615 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R617 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R618 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R619 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R620 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R621 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R622 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R623 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R624 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R625 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R626 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R627 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R628 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R629 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R630 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R631 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R633 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R700 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R701 | 1-208-875-81 | s | RES, CHIP 330 (1005) |
| R702 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R703 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R704 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R705 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R706 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R707 | 1-208-891-81 | s | RES, CHIP 1.5K (1005) |
| R709 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R710 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R711 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R712 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R713 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R714 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R715 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R716 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R717 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R718 | 1-208-855-81 | s | RES, CHIP 47 (1005) |

(AT-167S BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R719 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R720 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R721 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R722 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R723 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R724 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R725 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R726 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R727 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R729 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R730 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R731 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R732 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R733 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R734 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R735 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R736 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R737 | 1-208-875-81 | s | RES, CHIP 330 (1005) |
| R738 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R739 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R740 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R741 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R742 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R743 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R744 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R745 | 1-208-899-81 | s | RES, CHIP 3.3K (1005) |
| R746 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R747 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R748 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R749 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R750 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R751 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R752 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R753 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R754 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R755 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R756 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R757 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R758 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R759 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R760 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R761 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R762 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R763 | 1-208-947-81 | s | RES, CHIP 330K (1005) |
| R764 | 1-208-955-81 | s | RES, CHIP 680K (1005) |
| R765 | 1-208-899-81 | s | RES, CHIP 3.3K (1005) |
| R766 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R767 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R768 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R769 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R770 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R771 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R772 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R773 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R774 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R775 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R776 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R777 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R778 | 1-208-863-81 | s | RES, CHIP 100 (1005) |

(AT-167S BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R779 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R780 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R781 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R782 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R783 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R784 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R785 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R786 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R787 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R788 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R789 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R790 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R791 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R792 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R793 | 1-208-955-81 | s | RES, CHIP 680K (1005) |
| R794 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R795 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R796 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R797 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R798 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R799 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R800 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R801 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R802 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R803 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R804 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R805 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R806 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R807 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R808 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R809 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R810 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R811 | 1-244-161-81 | s | RES, CHIP 2.2 (1005) |
| R812 | 1-244-161-81 | s | RES, CHIP 2.2 (1005) |
| R813 | 1-244-161-81 | s | RES, CHIP 2.2 (1005) |
| R814 | 1-244-161-81 | s | RES, CHIP 2.2 (1005) |
| R815 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R816 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R817 | 1-208-907-81 | s | RES, CHIP 6.8K (1005) |
| R818 | 1-244-161-81 | s | RES, CHIP 2.2 (1005) |
| R819 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R820 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R821 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R822 | 1-208-955-81 | s | RES, CHIP 680K (1005) |
| R823 | 1-208-939-81 | s | RES, CHIP 150K (1005) |
| R824 | 1-208-951-81 | s | RES, CHIP 470K (1005) |
| R825 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R826 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R827 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R828 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R829 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R830 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R831 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R832 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R833 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R834 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R835 | 1-244-161-81 | s | RES, CHIP 2.2 (1005) |
| R836 | 1-244-161-81 | s | RES, CHIP 2.2 (1005) |
| R837 | 1-244-161-81 | s | RES, CHIP 2.2 (1005) |

(AT-167S BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R839 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R840 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R841 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R842 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R843 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R844 | 1-208-899-81 | s | RES, CHIP 3.3K (1005) |
| R845 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R846 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R847 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R848 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R851 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R852 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R853 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R854 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R855 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R856 | 1-208-947-81 | s | RES, CHIP 330K (1005) |
| R857 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R858 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R859 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R861 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R862 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R863 | 1-208-899-81 | s | RES, CHIP 3.3K (1005) |
| R864 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R865 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R866 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R867 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R868 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R869 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R870 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R871 | 1-208-907-81 | s | RES, CHIP 6.8K (1005) |
| R872 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R879 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R880 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R883 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R885 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R887 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R888 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R889 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R890 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R891 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R893 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R894 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R897 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R900 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R902 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R903 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R904 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R905 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R906 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R907 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R908 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R909 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R910 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R911 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R912 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R913 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R914 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R915 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R916 | 1-220-870-81 | s | RES, CHIP 10 (1005) |

(AT-167S BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R917 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R918 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R919 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R920 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R921 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R922 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R923 | 1-244-161-81 | s | RES, CHIP 2.2 (1005) |
| R924 | 1-208-891-81 | s | RES, CHIP 1.5K (1005) |
| R925 | 1-208-891-81 | s | RES, CHIP 1.5K (1005) |
| R926 | 1-208-891-81 | s | RES, CHIP 1.5K (1005) |
| R927 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R928 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R929 | 1-244-161-81 | s | RES, CHIP 2.2 (1005) |
| R930 | 1-244-161-81 | s | RES, CHIP 2.2 (1005) |
| R931 | 1-244-161-81 | s | RES, CHIP 2.2 (1005) |
| R932 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R933 | 1-244-161-81 | s | RES, CHIP 2.2 (1005) |
| R934 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R935 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R936 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R937 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R938 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R939 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R940 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R941 | 1-208-899-81 | s | RES, CHIP 3.3K (1005) |
| R942 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R943 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R944 | 1-208-899-81 | s | RES, CHIP 3.3K (1005) |
| R945 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R946 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R947 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R948 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R950 | 1-208-875-81 | s | RES, CHIP 330 (1005) |
| R954 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R958 | 1-208-867-81 | s | RES, CHIP 150 (1005) |
| R959 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R960 | 1-208-867-81 | s | RES, CHIP 150 (1005) |
| R961 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R962 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R963 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R964 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R965 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R966 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R967 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R969 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R970 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R972 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R973 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| RB101 | 1-233-810-21 | s | RES, NETWORK 100K (3216) |
| RB102 | 1-233-810-21 | s | RES, NETWORK 100K (3216) |
| RB103 | 1-233-810-21 | s | RES, NETWORK 100K (3216) |
| RB104 | 1-233-810-21 | s | RES, NETWORK 100K (3216) |
| RB105 | 1-233-810-21 | s | RES, NETWORK 100K (3216) |
| RB106 | 1-233-810-21 | s | RES, NETWORK 100K (3216) |
| RB107 | 1-233-810-21 | s | RES, NETWORK 100K (3216) |
| RB108 | 1-233-810-21 | s | RES, NETWORK 100K (3216) |
| RB109 | 1-233-810-21 | s | RES, NETWORK 100K (3216) |
| RB110 | 1-233-810-21 | s | RES, NETWORK 100K (3216) |

(AT-167S BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| RB111 | 1-233-810-21 | s | RES, NETWORK 100K (3216) |
| RB112 | 1-233-810-21 | s | RES, NETWORK 100K (3216) |
| RB113 | 1-233-810-21 | s | RES, NETWORK 100K (3216) |
| RB114 | 1-233-810-21 | s | RES, NETWORK 100K (3216) |
| RB115 | 1-233-810-21 | s | RES, NETWORK 100K (3216) |
| RB116 | 1-233-810-21 | s | RES, NETWORK 100K (3216) |
| RB117 | 1-233-810-21 | s | RES, NETWORK 100K (3216) |
| RB118 | 1-233-810-21 | s | RES, NETWORK 100K (3216) |
| RB119 | 1-233-423-21 | s | RES, CHIP NETWORK 47 (3216) |
| RB120 | 1-233-423-21 | s | RES, CHIP NETWORK 47 (3216) |
| RB121 | 1-233-423-21 | s | RES, CHIP NETWORK 47 (3216) |
| RB123 | 1-233-423-21 | s | RES, CHIP NETWORK 47 (3216) |
| RB124 | 1-233-423-21 | s | RES, CHIP NETWORK 47 (3216) |
| RB125 | 1-233-423-21 | s | RES, CHIP NETWORK 47 (3216) |
| RB126 | 1-233-423-21 | s | RES, CHIP NETWORK 47 (3216) |
| RB401 | 1-233-810-21 | s | RES, NETWORK 100K (3216) |
| RB402 | 1-233-810-21 | s | RES, NETWORK 100K (3216) |
| RB403 | 1-233-810-21 | s | RES, NETWORK 100K (3216) |
| RB404 | 1-233-810-21 | s | RES, NETWORK 100K (3216) |
| RB405 | 1-233-810-21 | s | RES, NETWORK 100K (3216) |
| RB406 | 1-233-810-21 | s | RES, NETWORK 100K (3216) |
| RB407 | 1-233-810-21 | s | RES, NETWORK 100K (3216) |
| RB420 | 1-233-412-21 | s | RES, CHIP NETWORK 1.0K (3216) |
| RB421 | 1-233-412-21 | s | RES, CHIP NETWORK 1.0K (3216) |
| RB422 | 1-233-412-21 | s | RES, CHIP NETWORK 1.0K (3216) |
| RB423 | 1-233-415-21 | s | RES, CHIP NETWORK 10K (3216) |
| RB424 | 1-233-412-21 | s | RES, CHIP NETWORK 1.0K (3216) |
| RB425 | 1-233-412-21 | s | RES, CHIP NETWORK 1.0K (3216) |
| RB426 | 1-233-412-21 | s | RES, CHIP NETWORK 1.0K (3216) |
| RB427 | 1-233-412-21 | s | RES, CHIP NETWORK 1.0K (3216) |
| RB428 | 1-233-412-21 | s | RES, CHIP NETWORK 1.0K (3216) |
| RB429 | 1-233-412-21 | s | RES, CHIP NETWORK 1.0K (3216) |
| RB430 | 1-233-412-21 | s | RES, CHIP NETWORK 1.0K (3216) |
| RB431 | 1-233-412-21 | s | RES, CHIP NETWORK 1.0K (3216) |
| RB701 | 1-233-576-21 | s | RES, CHIP NETWORK 100 (3216) |
| RB703 | 1-233-576-21 | s | RES, CHIP NETWORK 100 (3216) |
| RB709 | 1-233-574-21 | s | RES, CHIP NETWORK 10 (3216) |
| RB710 | 1-233-423-21 | s | RES, CHIP NETWORK 47 (3216) |
| RB714 | 1-233-574-21 | s | RES, CHIP NETWORK 10 (3216) |
| RB715 | 1-233-574-21 | s | RES, CHIP NETWORK 10 (3216) |
| RB716 | 1-233-423-21 | s | RES, CHIP NETWORK 47 (3216) |
| RB717 | 1-233-423-21 | s | RES, CHIP NETWORK 47 (3216) |
| RV701 | 1-225-791-21 | s | RES, ADJ, CERMET 5K |
| RV702 | 1-225-793-21 | s | RES, ADJ, CERMET 20K |
| S101 | 1-771-709-41 | s | SWITCH, SLIDE |
| S102 | 1-771-709-41 | s | SWITCH, SLIDE |
| S103 | 1-771-709-41 | s | SWITCH, SLIDE |
| S104 | 1-771-709-41 | s | SWITCH, SLIDE |
| S401 | 1-762-118-21 | s | SWITCH, TOGGLE |
| S402 | 1-762-120-21 | s | SWITCH, TOGGLE |
| S403 | 1-572-658-21 | s | SWITCH, ROTARY |
| S404 | 1-572-658-21 | s | SWITCH, ROTARY |
| S405 | 1-572-658-21 | s | SWITCH, ROTARY |
| S406 | 1-692-271-41 | s | SWITCH, SLIDE |
| S407 | 1-692-271-41 | s | SWITCH, SLIDE |
| S408 | 1-692-271-41 | s | SWITCH, SLIDE |
| S409 | 1-692-271-41 | s | SWITCH, SLIDE |
| S410 | 1-762-217-31 | s | SWITCH, SLIDE |

(AT-167S BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| S411 | 1-570-711-33 | s | SWITCH, SLIDE |
| S412 | 1-570-711-33 | s | SWITCH, SLIDE |
| S413 | 1-570-711-33 | s | SWITCH, SLIDE |
| S416 | 1-762-217-31 | s | SWITCH, SLIDE |
| S418 | 1-762-217-31 | s | SWITCH, SLIDE |
| S419 | 1-762-217-31 | s | SWITCH, SLIDE |
| S420 | 1-762-217-31 | s | SWITCH, SLIDE |
| THP1 ⚠ | 1-533-817-21 | s | THERMISTOR |
| THP2 ⚠ | 1-533-817-21 | s | THERMISTOR |
| THP3 ⚠ | 1-804-458-21 | s | THERMISTOR, POSITIVE |
| THP4 ⚠ | 1-804-458-21 | s | THERMISTOR, POSITIVE |
| THP101 ⚠ | 1-803-353-21 | s | THERMISTOR, POSITIVE |
| TP601 | 1-535-877-22 | s | CHIP, CHECKER |
| TP701 | 1-535-877-22 | s | CHIP, CHECKER |
| TP702 | 1-535-877-22 | s | CHIP, CHECKER |
| TP703 | 1-535-877-22 | s | CHIP, CHECKER |
| TP704 | 1-535-877-22 | s | CHIP, CHECKER |
| TP705 | 1-535-877-22 | s | CHIP, CHECKER |
| TP709 | 1-535-877-22 | s | CHIP, CHECKER |
| TP711 | 1-535-877-22 | s | CHIP, CHECKER |
| TP712 | 1-535-877-22 | s | CHIP, CHECKER |
| TP713 | 1-535-877-22 | s | CHIP, CHECKER |
| TP714 | 1-535-877-22 | s | CHIP, CHECKER |
| X301 | 1-813-007-21 | s | OSCILLATOR, CRYSTAL (SMD) |
| X302 | 1-795-177-21 | s | OSCILLATOR, CRYSTAL |
| X701 | 1-813-212-11 | s | OSCILLATOR, CRYSTAL |
| X702 | 1-795-671-12 | s | OSCILLATOR, CRYSTAL (VCXO)3.3V |
| X703 | 1-795-670-12 | s | OSCILLATOR, CRYSTAL (VCXO)3.3V |

---

AU-302 BOARD

---

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| 1pc | A-1129-307-A | s | MOUNTED CIRCUIT BOARD, AU-302 |
| C1 | 1-164-937-81 | s | CAP, CHIPCERAMIC 1000PF B 1005 |
| C2 | 1-164-937-81 | s | CAP, CHIPCERAMIC 1000PF B 1005 |
| C5 | 1-164-937-81 | s | CAP, CHIPCERAMIC 1000PF B 1005 |
| C6 | 1-164-937-81 | s | CAP, CHIPCERAMIC 1000PF B 1005 |
| C7 | 1-164-937-81 | s | CAP, CHIPCERAMIC 1000PF B 1005 |
| C8 | 1-115-153-21 | s | CAP, ELECT 4.7MF |
| C9 | 1-115-153-21 | s | CAP, ELECT 4.7MF |
| C10 | 1-162-968-91 | s | CAP,CHIP CERAMIC 4700PF B 1608 |
| C11 | 1-165-176-91 | s | CAP,CERAMIC 47000PF B 1608 |
| C12 | 1-164-260-91 | s | CAP,CHIP CERAMIC 47PF RH(1608) |
| C13 | 1-115-339-91 | s | CAP, CERAMIC 0.1MF B (2012) |
| C14 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C15 | 1-100-505-91 | s | CAP, CERAMIC 0.1MF C (1005) |
| C16 | 1-100-505-91 | s | CAP, CERAMIC 0.1MF C (1005) |
| C17 | 1-100-505-91 | s | CAP, CERAMIC 0.1MF C (1005) |
| C18 | 1-100-505-91 | s | CAP, CERAMIC 0.1MF C (1005) |
| C21 | 1-164-937-81 | s | CAP, CHIPCERAMIC 1000PF B 1005 |
| C22 | 1-164-937-81 | s | CAP, CHIPCERAMIC 1000PF B 1005 |
| C23 | 1-107-823-91 | s | CAP, CERAMIC 470000PF B (2012) |
| C24 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C25 | 1-128-416-21 | s | CAP, CHIP ELECT 100MF |
| C26 | 1-107-823-91 | s | CAP, CERAMIC 470000PF B (2012) |
| CN1 | 1-766-198-51 | s | CONNECTOR, FPC 26P |
| CN2 | 1-764-080-21 | o | PIN, CONNECTOR (PC BOARD) 8P |
| D1 | 6-501-358-01 | s | DIODE CL-197HG5-CD-T |
| D2 | 6-501-358-01 | s | DIODE CL-197HG5-CD-T |
| D3 | 8-719-077-09 | s | DIODE CL-196HR-CD-T |
| D4 | 8-719-077-09 | s | DIODE CL-196HR-CD-T |
| D5 | 8-719-077-09 | s | DIODE CL-196HR-CD-T |
| D6 | 8-719-077-09 | s | DIODE CL-196HR-CD-T |
| D9 | 8-719-077-09 | s | DIODE CL-196HR-CD-T |
| D10 | 8-719-077-09 | s | DIODE CL-196HR-CD-T |
| D11 | 6-501-358-01 | s | DIODE CL-197HG5-CD-T |
| D12 | 6-501-358-01 | s | DIODE CL-197HG5-CD-T |
| D15 | 6-501-358-01 | s | DIODE CL-197HG5-CD-T |
| D16 | 6-501-358-01 | s | DIODE CL-197HG5-CD-T |
| D17 | 8-719-064-41 | s | DIODE CL-191Y-CD-T |
| D18 | 8-719-064-41 | s | DIODE CL-191Y-CD-T |
| D19 | 8-719-064-41 | s | DIODE CL-191Y-CD-T |
| D20 | 8-719-064-41 | s | DIODE CL-191Y-CD-T |
| D21 | 8-719-064-41 | s | DIODE CL-191Y-CD-T |
| D22 | 8-719-064-41 | s | DIODE CL-191Y-CD-T |
| D23 | 8-719-989-01 | s | DIODE DA221-TL |
| D24 | 8-719-989-01 | s | DIODE DA221-TL |
| FB1 | 1-414-864-21 | s | FERRITE, EMI (SMD) (1608) |
| IC1 | 8-759-278-58 | s | IC NJM4558V-TE2 |
| IC2 | 8-759-168-19 | s | IC TA78L09F-TE12L |
| JC1 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| L1 | 1-414-404-41 | s | INDUCTOR (SMD) 100.0UH |
| L2 | 1-414-404-41 | s | INDUCTOR (SMD) 100.0UH |
| L3 | 1-414-404-41 | s | INDUCTOR (SMD) 100.0UH |
| L4 | 1-414-404-41 | s | INDUCTOR (SMD) 100.0UH |
| L5 | 1-414-404-41 | s | INDUCTOR (SMD) 100.0UH |
| L6 | 1-414-404-41 | s | INDUCTOR (SMD) 100.0UH |

(AU-302 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| L7 | 1-414-404-41 | s | INDUCTOR (SMD) 100.0UH |
| R1 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R2 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R4 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R5 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R6 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R7 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R8 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R10 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R11 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R12 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R13 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R14 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R15 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R16 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R18 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R19 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R20 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R21 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R22 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R23 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R24 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R25 | 1-220-878-81 | s | RES, CHIP 22 (1005) |
| R26 | 1-208-943-81 | s | RES, CHIP 220K (1005) |
| R27 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R28 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R29 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R30 | 1-208-943-81 | s | RES, CHIP 220K (1005) |
| R31 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R32 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R33 | 1-208-943-81 | s | RES, CHIP 220K (1005) |
| R34 | 1-208-943-81 | s | RES, CHIP 220K (1005) |
| RV1 | 1-238-255-21 | s | RES, VAR, CARBON 10K |
| S1 | 1-762-122-11 | s | SWITCH, TOGGLE |
| S2 | 1-762-217-31 | s | SWITCH, SLIDE |
| S3 | 1-570-711-33 | s | SWITCH, SLIDE |
| S4 | 1-762-217-31 | s | SWITCH, SLIDE |
| S5 | 1-570-711-33 | s | SWITCH, SLIDE |

---

AVP-6 BOARD

---

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| 1pc | A-1129-300-A | s | MOUNTED CIRCUIT BOARD, AVP-6 |
| 4pcs | 7-682-947-01 | s | SCREW +PSW 3X6 |
| C100 | 1-100-505-91 | s | CAP, CERAMIC 0.1MF C (1005) |
| C101 | 1-127-692-91 | s | CAP, CHIP CERAMIC 10MF B 3225 |
| C102 | 1-127-573-91 | s | CAP, CHIP CERAMIC 1MF B (2012) |
| C103 | 1-127-573-91 | s | CAP, CHIP CERAMIC 1MF B (2012) |
| C104 | 1-127-573-91 | s | CAP, CHIP CERAMIC 1MF B (2012) |
| C105 | 1-127-573-91 | s | CAP, CHIP CERAMIC 1MF B (2012) |
| C106 | 1-127-573-91 | s | CAP, CHIP CERAMIC 1MF B (2012) |
| C107 | 1-126-396-21 | s | CAP, CHIP ELECT 47MF (6.3X5.7) |
| C108 | 1-126-396-21 | s | CAP, CHIP ELECT 47MF (6.3X5.7) |
| C109 | 1-126-396-21 | s | CAP, CHIP ELECT 47MF (6.3X5.7) |
| C110 | 1-126-396-21 | s | CAP, CHIP ELECT 47MF (6.3X5.7) |
| C111 | 1-126-396-21 | s | CAP, CHIP ELECT 47MF (6.3X5.7) |
| C112 | 1-127-692-91 | s | CAP, CHIP CERAMIC 10MF B 3225 |
| C113 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C114 | 1-100-505-91 | s | CAP, CERAMIC 0.1MF C (1005) |
| C115 | 1-164-874-81 | s | CAP,CHIP CERAMIC 100PF CH 1005 |
| C116 | 1-164-874-81 | s | CAP,CHIP CERAMIC 100PF CH 1005 |
| C117 | 1-164-874-81 | s | CAP,CHIP CERAMIC 100PF CH 1005 |
| C118 | 1-164-874-81 | s | CAP,CHIP CERAMIC 100PF CH 1005 |
| C119 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C120 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C121 | 1-127-692-91 | s | CAP, CHIP CERAMIC 10MF B 3225 |
| C123 | 1-127-573-91 | s | CAP, CHIP CERAMIC 1MF B (2012) |
| C124 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C125 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C126 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C127 | 1-126-396-21 | s | CAP, CHIP ELECT 47MF (6.3X5.7) |
| C129 | 1-127-573-91 | s | CAP, CHIP CERAMIC 1MF B (2012) |
| C130 | 1-119-923-81 | s | CAP, CERAMIC 0.047MF B 1005 |
| C131 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C132 | 1-127-573-91 | s | CAP, CHIP CERAMIC 1MF B (2012) |
| C133 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C134 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C135 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C136 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C137 | 1-164-874-81 | s | CAP,CHIP CERAMIC 100PF CH 1005 |
| C138 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C139 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C140 | 1-119-923-81 | s | CAP, CERAMIC 0.047MF B 1005 |
| C141 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C143 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C144 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C145 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C146 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C147 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C148 | 1-107-819-81 | s | CAP,CHIP CERAMIC 22000PF B1005 |
| C149 | 1-164-936-81 | s | CAP, CHIP CERAMIC 680PF B 1005 |
| C150 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C151 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C152 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C153 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C154 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C155 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C156 | 1-127-692-91 | s | CAP, CHIP CERAMIC 10MF B 3225 |
| C157 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C158 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |

(AVP-6 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C159 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C160 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C161 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C162 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C163 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C164 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C165 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C166 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C167 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C168 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C169 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C170 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C171 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C172 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C173 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C174 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C175 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C176 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C177 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C178 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C179 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C200 | 1-100-505-91 | s | CAP, CERAMIC 0.1MF C (1005) |
| C201 | 1-100-505-91 | s | CAP, CERAMIC 0.1MF C (1005) |
| C202 | 1-100-505-91 | s | CAP, CERAMIC 0.1MF C (1005) |
| C203 | 1-100-505-91 | s | CAP, CERAMIC 0.1MF C (1005) |
| C204 | 1-100-505-91 | s | CAP, CERAMIC 0.1MF C (1005) |
| C205 | 1-100-505-91 | s | CAP, CERAMIC 0.1MF C (1005) |
| C206 | 1-100-505-91 | s | CAP, CERAMIC 0.1MF C (1005) |
| C207 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C208 | 1-100-505-91 | s | CAP, CERAMIC 0.1MF C (1005) |
| C300 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C301 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C302 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C303 | 1-100-505-91 | s | CAP, CERAMIC 0.1MF C (1005) |
| C304 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C305 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C306 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C307 | 1-100-505-91 | s | CAP, CERAMIC 0.1MF C (1005) |
| C308 | 1-164-858-81 | s | CAP, CHIP CERAMIC 22PF CH 1005 |
| C309 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C310 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C311 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C312 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C313 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C314 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C315 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C316 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C317 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C318 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C319 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C320 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C321 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C322 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C323 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C324 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C325 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C326 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C327 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C328 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |

(AVP-6 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C329 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C330 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C331 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C332 | 1-100-505-91 | s | CAP, CERAMIC 0.1MF C (1005) |
| C333 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C334 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C335 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C336 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C337 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C338 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C339 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C340 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C341 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C342 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C343 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C344 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C345 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C346 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C347 | 1-100-505-91 | s | CAP, CERAMIC 0.1MF C (1005) |
| C348 | 1-127-573-91 | s | CAP, CHIP CERAMIC 1MF B (2012) |
| C349 | 1-164-854-81 | s | CAP, CHIP CERAMIC 15PF CH 1005 |
| C350 | 1-100-505-91 | s | CAP, CERAMIC 0.1MF C (1005) |
| C351 | 1-100-505-91 | s | CAP, CERAMIC 0.1MF C (1005) |
| C352 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C353 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C354 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C355 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C356 | 1-100-505-91 | s | CAP, CERAMIC 0.1MF C (1005) |
| C357 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C358 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C359 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C360 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C361 | 1-100-505-91 | s | CAP, CERAMIC 0.1MF C (1005) |
| C362 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C363 | 1-100-505-91 | s | CAP, CERAMIC 0.1MF C (1005) |
| C364 | 1-127-573-91 | s | CAP, CHIP CERAMIC 1MF B (2012) |
| C365 | 1-164-854-81 | s | CAP, CHIP CERAMIC 15PF CH 1005 |
| C366 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C367 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C368 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C369 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C400 | 1-164-850-81 | s | CAP, CHIP CERAMIC 10PF CH 1005 |
| C402 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C403 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C404 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C405 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C406 | 1-165-884-91 | s | CAP, CERAMIC 2.2MF (1608) |
| C407 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C408 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C409 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C410 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C411 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C412 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C413 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C414 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C415 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C416 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C417 | 1-164-937-81 | s | CAP, CHIPCERAMIC 1000PF B 1005 |
| C418 | 1-164-935-81 | s | CAP, CHIP CERAMIC 470PF B 1005 |

(AVP-6 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C419 | 1-165-884-91 | s | CAP, CERAMIC 2.2MF (1608) |
| C420 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C421 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C422 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C425 | 1-164-937-81 | s | CAP, CHIPCERAMIC 1000PF B 1005 |
| C426 | 1-164-935-81 | s | CAP, CHIP CERAMIC 470PF B 1005 |
| C428 | 1-164-937-81 | s | CAP, CHIPCERAMIC 1000PF B 1005 |
| C429 | 1-164-935-81 | s | CAP, CHIP CERAMIC 470PF B 1005 |
| C430 | 1-126-395-21 | s | CAP, CHIP ELECT 22MF (5X5.7) |
| C431 | 1-126-395-21 | s | CAP, CHIP ELECT 22MF (5X5.7) |
| C432 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C433 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C434 | 1-127-692-91 | s | CAP, CHIP CERAMIC 10MF B 3225 |
| C435 | 1-127-692-91 | s | CAP, CHIP CERAMIC 10MF B 3225 |
| C436 | 1-164-315-91 | s | CAP, CERAMIC 470PF CH (1608) |
| C438 | 1-164-935-81 | s | CAP, CHIP CERAMIC 470PF B 1005 |
| C439 | 1-162-964-91 | s | CAP,CHIP CERAMIC 1000PF B 1608 |
| C440 | 1-164-937-81 | s | CAP, CHIPCERAMIC 1000PF B 1005 |
| C441 | 1-107-781-21 | s | CAP, ELECT 47MF |
| C443 | 1-107-781-21 | s | CAP, ELECT 47MF |
| C445 | 1-100-505-91 | s | CAP, CERAMIC 0.1MF C (1005) |
| C446 | 1-100-505-91 | s | CAP, CERAMIC 0.1MF C (1005) |
| C447 | 1-117-142-21 | s | CAP, ELECT 0.22MF |
| C448 | 1-107-781-21 | s | CAP, ELECT 47MF |
| C450 | 1-117-142-21 | s | CAP, ELECT 0.22MF |
| C451 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C453 | 1-164-939-81 | s | CAP, CHIPCERAMIC 2200PF B 1005 |
| C454 | 1-164-939-81 | s | CAP, CHIPCERAMIC 2200PF B 1005 |
| C455 | 1-164-939-81 | s | CAP, CHIPCERAMIC 2200PF B 1005 |
| C456 | 1-164-939-81 | s | CAP, CHIPCERAMIC 2200PF B 1005 |
| C502 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C503 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C504 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C505 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C506 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C507 | 1-165-884-91 | s | CAP, CERAMIC 2.2MF (1608) |
| C508 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C509 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C510 | 1-165-884-91 | s | CAP, CERAMIC 2.2MF (1608) |
| C511 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C512 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C513 | 1-127-692-91 | s | CAP, CHIP CERAMIC 10MF B 3225 |
| C514 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C515 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C516 | 1-164-935-81 | s | CAP, CHIP CERAMIC 470PF B 1005 |
| C517 | 1-164-935-81 | s | CAP, CHIP CERAMIC 470PF B 1005 |
| C518 | 1-164-937-81 | s | CAP, CHIPCERAMIC 1000PF B 1005 |
| C519 | 1-164-937-81 | s | CAP, CHIPCERAMIC 1000PF B 1005 |
| C520 | 1-164-874-81 | s | CAP,CHIP CERAMIC 100PF CH 1005 |
| C521 | 1-164-858-81 | s | CAP, CHIP CERAMIC 22PF CH 1005 |
| C522 | 1-164-874-81 | s | CAP,CHIP CERAMIC 100PF CH 1005 |
| C523 | 1-164-858-81 | s | CAP, CHIP CERAMIC 22PF CH 1005 |
| C524 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C525 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C526 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C527 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C528 | 1-100-581-81 | s | CAP,CHIP CERAMIC0.0047MF B1005 |
| C529 | 1-100-581-81 | s | CAP,CHIP CERAMIC0.0047MF B1005 |
| C530 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |

(AVP-6 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C531 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C532 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C533 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C534 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C535 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C536 | 1-164-937-81 | s | CAP, CHIPCERAMIC 1000PF B 1005 |
| C538 | 1-164-935-81 | s | CAP, CHIP CERAMIC 470PF B 1005 |
| C539 | 1-164-937-81 | s | CAP, CHIPCERAMIC 1000PF B 1005 |
| C541 | 1-164-935-81 | s | CAP, CHIP CERAMIC 470PF B 1005 |
| C542 | 1-164-874-81 | s | CAP,CHIP CERAMIC 100PF CH 1005 |
| C543 | 1-164-874-81 | s | CAP,CHIP CERAMIC 100PF CH 1005 |
| C546 | 1-164-850-81 | s | CAP, CHIP CERAMIC 10PF CH 1005 |
| C547 | 1-164-850-81 | s | CAP, CHIP CERAMIC 10PF CH 1005 |
| C552 | 1-164-939-81 | s | CAP, CHIPCERAMIC 2200PF B 1005 |
| C553 | 1-164-939-81 | s | CAP, CHIPCERAMIC 2200PF B 1005 |
| C554 | 1-164-939-81 | s | CAP, CHIPCERAMIC 2200PF B 1005 |
| C555 | 1-164-939-81 | s | CAP, CHIPCERAMIC 2200PF B 1005 |
| C600 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C601 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C602 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C603 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C604 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C605 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C606 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C607 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C608 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C609 | 1-165-884-91 | s | CAP, CERAMIC 2.2MF (1608) |
| C610 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C611 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C612 | 1-164-935-81 | s | CAP, CHIP CERAMIC 470PF B 1005 |
| C613 | 1-164-935-81 | s | CAP, CHIP CERAMIC 470PF B 1005 |
| C614 | 1-126-395-21 | s | CAP, CHIP ELECT 22MF (5X5.7) |
| C615 | 1-126-395-21 | s | CAP, CHIP ELECT 22MF (5X5.7) |
| C616 | 1-100-505-91 | s | CAP, CERAMIC 0.1MF C (1005) |
| C617 | 1-100-505-91 | s | CAP, CERAMIC 0.1MF C (1005) |
| C618 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C619 | 1-164-937-81 | s | CAP, CHIPCERAMIC 1000PF B 1005 |
| C620 | 1-164-937-81 | s | CAP, CHIPCERAMIC 1000PF B 1005 |
| C621 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C622 | 1-126-395-21 | s | CAP, CHIP ELECT 22MF (5X5.7) |
| C623 | 1-126-395-21 | s | CAP, CHIP ELECT 22MF (5X5.7) |
| C624 | 1-100-505-91 | s | CAP, CERAMIC 0.1MF C (1005) |
| C625 | 1-100-505-91 | s | CAP, CERAMIC 0.1MF C (1005) |
| C626 | 1-127-573-91 | s | CAP, CHIP CERAMIC 1MF B (2012) |
| C627 | 1-127-573-91 | s | CAP, CHIP CERAMIC 1MF B (2012) |
| C628 | 1-126-395-21 | s | CAP, CHIP ELECT 22MF (5X5.7) |
| C629 | 1-126-395-21 | s | CAP, CHIP ELECT 22MF (5X5.7) |
| C630 | 1-126-395-21 | s | CAP, CHIP ELECT 22MF (5X5.7) |
| C631 | 1-126-395-21 | s | CAP, CHIP ELECT 22MF (5X5.7) |
| C632 | 1-107-781-21 | s | CAP, ELECT 47MF |
| C633 | 1-107-781-21 | s | CAP, ELECT 47MF |
| C634 | 1-107-781-21 | s | CAP, ELECT 47MF |
| C635 | 1-107-781-21 | s | CAP, ELECT 47MF |
| C636 | 1-127-692-91 | s | CAP, CHIP CERAMIC 10MF B 3225 |
| C637 | 1-127-692-91 | s | CAP, CHIP CERAMIC 10MF B 3225 |
| C640 | 1-126-395-21 | s | CAP, CHIP ELECT 22MF (5X5.7) |
| C641 | 1-126-395-21 | s | CAP, CHIP ELECT 22MF (5X5.7) |
| C642 | 1-126-395-21 | s | CAP, CHIP ELECT 22MF (5X5.7) |
| C643 | 1-126-395-21 | s | CAP, CHIP ELECT 22MF (5X5.7) |

(AVP-6 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C644 | 1-128-407-21 | s | CAP, ELECT 47MF 8X10 |
| C645 | 1-128-407-21 | s | CAP, ELECT 47MF 8X10 |
| C646 | 1-128-407-21 | s | CAP, ELECT 47MF 8X10 |
| C647 | 1-128-407-21 | s | CAP, ELECT 47MF 8X10 |
| C648 | 1-164-937-81 | s | CAP, CHIPCERAMIC 1000PF B 1005 |
| C649 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C650 | 1-164-935-81 | s | CAP, CHIP CERAMIC 470PF B 1005 |
| C651 | 1-164-937-81 | s | CAP, CHIPCERAMIC 1000PF B 1005 |
| C652 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C653 | 1-164-935-81 | s | CAP, CHIP CERAMIC 470PF B 1005 |
| C654 | 1-164-850-81 | s | CAP, CHIP CERAMIC 10PF CH 1005 |
| C655 | 1-164-939-81 | s | CAP, CHIPCERAMIC 2200PF B 1005 |
| C656 | 1-164-939-81 | s | CAP, CHIPCERAMIC 2200PF B 1005 |
| C700 | 1-107-819-81 | s | CAP,CHIP CERAMIC 22000PF B1005 |
| C701 | 1-107-819-81 | s | CAP,CHIP CERAMIC 22000PF B1005 |
| C702 | 1-107-819-81 | s | CAP,CHIP CERAMIC 22000PF B1005 |
| C703 | 1-107-819-81 | s | CAP,CHIP CERAMIC 22000PF B1005 |
| C704 | 1-107-819-81 | s | CAP,CHIP CERAMIC 22000PF B1005 |
| C705 | 1-107-819-81 | s | CAP,CHIP CERAMIC 22000PF B1005 |
| C706 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C707 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C708 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C709 | 1-100-581-81 | s | CAP,CHIP CERAMIC0.0047MF B1005 |
| C710 | 1-100-581-81 | s | CAP,CHIP CERAMIC0.0047MF B1005 |
| C711 | 1-100-581-81 | s | CAP,CHIP CERAMIC0.0047MF B1005 |
| C712 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C713 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C714 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C715 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C716 | 1-135-960-91 | s | CAP, CHIP CERAMIC 10MF B(3225) |
| C717 | 1-135-960-91 | s | CAP, CHIP CERAMIC 10MF B(3225) |
| C718 | 1-135-960-91 | s | CAP, CHIP CERAMIC 10MF B(3225) |
| C719 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C720 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C721 | 1-100-581-81 | s | CAP,CHIP CERAMIC0.0047MF B1005 |
| C722 | 1-100-581-81 | s | CAP,CHIP CERAMIC0.0047MF B1005 |
| C723 | 1-164-940-81 | s | CAP,CHIP CERAMIC 3300PF B 1005 |
| C724 | 1-164-940-81 | s | CAP,CHIP CERAMIC 3300PF B 1005 |
| C725 | 1-164-940-81 | s | CAP,CHIP CERAMIC 3300PF B 1005 |
| C726 | 1-164-940-81 | s | CAP,CHIP CERAMIC 3300PF B 1005 |
| C727 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C728 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| CN3 | 1-764-093-21 | o | PIN, CONNECTOR (PC BOARD) 8P |
| D100 | 8-719-017-03 | s | DIODE 02DZ4.7-TPH3 |
| D101 | 8-719-017-03 | s | DIODE 02DZ4.7-TPH3 |
| D102 | 8-719-017-03 | s | DIODE 02DZ4.7-TPH3 |
| D103 | 8-719-017-03 | s | DIODE 02DZ4.7-TPH3 |
| D104 | 8-719-074-31 | s | DIODE CL-196YG-CD-T |
| D105 | 8-719-074-31 | s | DIODE CL-196YG-CD-T |
| D106 | 8-719-074-31 | s | DIODE CL-196YG-CD-T |
| D107 | 8-719-064-41 | s | DIODE CL-191Y-CD-T |
| D400 | 8-719-421-28 | s | DIODE MA728-TX |
| D401 | 8-719-421-28 | s | DIODE MA728-TX |
| D402 | 8-719-421-28 | s | DIODE MA728-TX |
| D403 | 8-719-421-28 | s | DIODE MA728-TX |
| D404 | 8-719-016-84 | s | DIODE 02DZ2.0-TPH3 |
| D405 | 8-719-016-84 | s | DIODE 02DZ2.0-TPH3 |
| D406 | 8-719-421-28 | s | DIODE MA728-TX |

(AVP-6 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| D407 | 8-719-421-28 | s | DIODE MA728-TX |
| D408 | 8-719-016-84 | s | DIODE 02DZ2.0-TPH3 |
| D409 | 8-719-016-84 | s | DIODE 02DZ2.0-TPH3 |
| D410 | 8-719-016-84 | s | DIODE 02DZ2.0-TPH3 |
| D411 | 8-719-016-84 | s | DIODE 02DZ2.0-TPH3 |
| D500 | 8-719-421-28 | s | DIODE MA728-TX |
| D501 | 8-719-421-28 | s | DIODE MA728-TX |
| D502 | 8-719-421-28 | s | DIODE MA728-TX |
| D503 | 8-719-421-28 | s | DIODE MA728-TX |
| D504 | 8-719-016-84 | s | DIODE 02DZ2.0-TPH3 |
| D505 | 8-719-016-84 | s | DIODE 02DZ2.0-TPH3 |
| D506 | 8-719-016-84 | s | DIODE 02DZ2.0-TPH3 |
| D507 | 8-719-016-84 | s | DIODE 02DZ2.0-TPH3 |
| D600 | 8-719-421-28 | s | DIODE MA728-TX |
| D601 | 8-719-421-28 | s | DIODE MA728-TX |
| D602 | 8-719-421-28 | s | DIODE MA728-TX |
| D603 | 8-719-421-28 | s | DIODE MA728-TX |
| D604 | 8-719-016-84 | s | DIODE 02DZ2.0-TPH3 |
| D605 | 8-719-016-84 | s | DIODE 02DZ2.0-TPH3 |
| D606 | 8-719-016-84 | s | DIODE 02DZ2.0-TPH3 |
| D607 | 8-719-016-84 | s | DIODE 02DZ2.0-TPH3 |
| D700 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D701 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D702 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D703 | 8-719-024-83 | s | DIODE 1SS301-TE85L |
| D704 | 8-719-024-83 | s | DIODE 1SS301-TE85L |
| D705 | 8-719-024-83 | s | DIODE 1SS301-TE85L |
| D706 | 8-719-017-05 | s | DIODE 02DZ5.1-TPH3 |
| D707 | 8-719-017-05 | s | DIODE 02DZ5.1-TPH3 |
| D708 | 8-719-017-05 | s | DIODE 02DZ5.1-TPH3 |
| D709 | 8-719-024-83 | s | DIODE 1SS301-TE85L |
| D710 | 8-719-024-83 | s | DIODE 1SS301-TE85L |
| D711 | 8-719-024-83 | s | DIODE 1SS301-TE85L |
| D712 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D713 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D714 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D715 | 8-719-016-84 | s | DIODE 02DZ2.0-TPH3 |
| D716 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D717 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D718 | 8-719-024-83 | s | DIODE 1SS301-TE85L |
| D719 | 8-719-024-83 | s | DIODE 1SS301-TE85L |
| D720 | 8-719-016-84 | s | DIODE 02DZ2.0-TPH3 |
| E1 | 1-535-877-22 | s | CHIP, CHECKER |
| E2 | 1-535-877-22 | s | CHIP, CHECKER |
| E3 | 1-535-877-22 | s | CHIP, CHECKER |
| E4 | 1-535-877-22 | s | CHIP, CHECKER |
| FB100 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB101 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| IC100 | 8-759-327-01 | s | IC NJM062V(TE2) |
| IC101 | 8-759-327-01 | s | IC NJM062V(TE2) |
| IC102 | 8-759-338-95 | s | IC NJM2903V(TE2) |
| IC103 | 8-759-338-95 | s | IC NJM2903V(TE2) |
| IC104 | 6-701-572-01 | s | IC TPS54610PWPR |
| IC105 | 8-759-327-01 | s | IC NJM062V(TE2) |
| IC106 | 6-704-976-01 | s | IC ADR381ARTZ-REEL7 |
| IC107 | 8-759-471-96 | s | IC 74VHC08MTCX |
| IC108 | 8-759-648-61 | s | IC LTC1387CG |
| IC109 | 8-759-648-61 | s | IC LTC1387CG |

(AVP-6 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| IC200 | 8-759-392-77 | s | IC SN74LVC245APWR |
| IC201 | 8-759-392-77 | s | IC SN74LVC245APWR |
| IC202 | 8-759-392-77 | s | IC SN74LVC245APWR |
| IC203 | 8-759-472-18 | s | IC 74VHC138MTCX |
| IC204 | 8-759-363-26 | s | IC RN5VD28AA-TL-FA |
| IC205 | 6-706-489-01 | s | IC TC7SH32FU(T5RSOYJF) |
| IC206 | 8-752-392-03 | s | IC CXD1095BR |
| IC207 | 8-759-471-96 | s | IC 74VHC08MTCX |
| IC300 | 6-704-463-01 | s | IC CY7C1021CV33-15ZXCT |
| IC301 | 8-759-485-24 | s | IC MC74HC4046ADTR2 |
| IC303 | 8-759-669-66 | s | IC TLC272CPWR-12 |
| IC304 | 8-759-592-44 | s | IC TC7SZ04FU(TE85R) |
| IC305 | 8-759-471-96 | s | IC 74VHC08MTCX |
| IC308 | 8-759-392-77 | s | IC SN74LVC245APWR |
| IC309 | 8-759-392-77 | s | IC SN74LVC245APWR |
| IC311 | 8-759-561-46 | s | IC AD8014ARTZ-REEL7 |
| IC312 | 8-759-392-77 | s | IC SN74LVC245APWR |
| IC313 | 8-759-392-77 | s | IC SN74LVC245APWR |
| IC314 | 8-759-392-77 | s | IC SN74LVC245APWR |
| IC315 | 8-759-392-77 | s | IC SN74LVC245APWR |
| IC316 | 8-759-592-49 | s | IC TC7SZ125FU(TE85R) |
| IC317 | 8-759-592-49 | s | IC TC7SZ125FU(TE85R) |
| IC318 | 8-759-524-27 | s | IC TC74VHC244FT(EL) |
| IC319 | 8-759-441-31 | s | IC MC14053BDTR2 |
| IC320 | 8-759-561-46 | s | IC AD8014ARTZ-REEL7 |
| IC321 | 8-759-592-44 | s | IC TC7SZ04FU(TE85R) |
| IC401 | 6-700-563-01 | s | IC AK4552VT-E2 |
| IC402 | 6-700-563-01 | s | IC AK4552VT-E2 |
| IC403 | 8-759-278-58 | s | IC NJM4558V-TE2 |
| IC404 | 8-759-441-31 | s | IC MC14053BDTR2 |
| IC405 | 8-759-278-58 | s | IC NJM4558V-TE2 |
| IC406 | 8-759-422-21 | s | IC NJM4580V(TE2) |
| IC407 | 8-759-422-21 | s | IC NJM4580V(TE2) |
| IC409 | 8-759-278-58 | s | IC NJM4558V-TE2 |
| IC410 | 8-759-278-58 | s | IC NJM4558V-TE2 |
| IC500 | 6-700-563-01 | s | IC AK4552VT-E2 |
| IC501 | 6-700-563-01 | s | IC AK4552VT-E2 |
| IC502 | 8-759-278-58 | s | IC NJM4558V-TE2 |
| IC503 | 8-759-278-58 | s | IC NJM4558V-TE2 |
| IC504 | 8-759-278-58 | s | IC NJM4558V-TE2 |
| IC505 | 8-759-422-21 | s | IC NJM4580V(TE2) |
| IC506 | 8-759-422-21 | s | IC NJM4580V(TE2) |
| IC507 | 8-759-278-58 | s | IC NJM4558V-TE2 |
| IC508 | 8-759-278-58 | s | IC NJM4558V-TE2 |
| IC600 | 6-700-563-01 | s | IC AK4552VT-E2 |
| IC601 | 8-759-278-58 | s | IC NJM4558V-TE2 |
| IC602 | 8-759-278-58 | s | IC NJM4558V-TE2 |
| IC603 | 8-759-278-58 | s | IC NJM4558V-TE2 |
| IC604 | 8-759-278-58 | s | IC NJM4558V-TE2 |
| IC605 | 8-759-441-31 | s | IC MC14053BDTR2 |
| IC606 | 8-759-441-31 | s | IC MC14053BDTR2 |
| IC607 | 8-759-422-21 | s | IC NJM4580V(TE2) |
| IC608 | 8-759-422-21 | s | IC NJM4580V(TE2) |
| IC609 | 8-759-278-58 | s | IC NJM4558V-TE2 |
| IC610 | 8-759-278-58 | s | IC NJM4558V-TE2 |
| IC611 | 8-759-422-21 | s | IC NJM4580V(TE2) |
| IC612 | 8-759-422-21 | s | IC NJM4580V(TE2) |
| IC613 | 8-759-278-58 | s | IC NJM4558V-TE2 |
| IC614 | 8-759-278-58 | s | IC NJM4558V-TE2 |

(AVP-6 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| IC701 | 8-759-653-03 | s | IC NJM78M05DL1A-TE1 |
| IC702 | 8-759-653-03 | s | IC NJM78M05DL1A-TE1 |
| IC703 | 8-759-653-03 | s | IC NJM78M05DL1A-TE1 |
| JC100 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| JC201 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| JC500 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| JC503 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| JC504 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| JC507 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| JC700 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| JC701 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| JC702 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| JC703 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| JC704 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| L100 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L101 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L102 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L103 | 1-416-344-21 | s | COIL, CHOKE 10UH |
| L104 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L105 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L106 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L300 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L301 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L302 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L303 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L304 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L305 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L306 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L307 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L400 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L401 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L402 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L403 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L500 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L501 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L604 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L605 | 1-414-400-41 | s | INDUCTOR (SMD) 22.0UH |
| L606 | 1-414-400-41 | s | INDUCTOR (SMD) 22.0UH |
| L607 | 1-414-400-41 | s | INDUCTOR (SMD) 22.0UH |
| L608 | 1-414-400-41 | s | INDUCTOR (SMD) 22.0UH |
| L700 | 1-414-400-41 | s | INDUCTOR (SMD) 22.0UH |
| L701 | 1-414-400-41 | s | INDUCTOR (SMD) 22.0UH |
| L702 | 1-414-400-41 | s | INDUCTOR (SMD) 22.0UH |
| PH700 | 8-749-014-35 | s | IC HCPL-0630-500 |
| PH701 | 8-749-014-35 | s | IC HCPL-0630-500 |
| Q1 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q100 | 8-729-209-73 | s | TRANSISTOR 2SA1213Y-TE12L |
| Q101 | 8-729-209-77 | s | TRANSISTOR 2SC2873Y-TE12L |
| Q102 | 8-729-209-73 | s | TRANSISTOR 2SA1213Y-TE12L |
| Q103 | 8-729-209-73 | s | TRANSISTOR 2SA1213Y-TE12L |
| Q104 | 8-729-209-77 | s | TRANSISTOR 2SC2873Y-TE12L |
| Q105 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q106 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q107 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q108 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q109 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q110 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |

(AVP-6 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| Q600 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q601 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q602 | 8-729-928-25 | s | TRANSISTOR 2SA1774TL-QR |
| Q603 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q604 | 8-729-928-25 | s | TRANSISTOR 2SA1774TL-QR |
| Q605 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q606 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q607 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q608 | 8-729-928-25 | s | TRANSISTOR 2SA1774TL-QR |
| Q609 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q610 | 8-729-928-25 | s | TRANSISTOR 2SA1774TL-QR |
| Q611 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q700 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q701 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q702 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q703 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q704 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q705 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q706 | 8-729-141-76 | s | TRANSISTOR 2SD596T1-DV345 |
| Q707 | 8-729-141-76 | s | TRANSISTOR 2SD596T1-DV345 |
| Q710 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q711 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q712 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q713 | 8-729-928-25 | s | TRANSISTOR 2SA1774TL-QR |
| Q714 | 8-729-928-25 | s | TRANSISTOR 2SA1774TL-QR |
| Q715 | 8-729-928-25 | s | TRANSISTOR 2SA1774TL-QR |
| Q716 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| R100 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R101 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R102 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R103 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R104 | 1-208-931-81 | s | RES, CHIP 68K (1005) |
| R105 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R106 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R107 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R108 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R109 | 1-208-931-81 | s | RES, CHIP 68K (1005) |
| R110 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R111 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R113 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R114 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R115 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R116 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R117 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R118 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R119 | 1-208-931-81 | s | RES, CHIP 68K (1005) |
| R120 | 1-208-931-81 | s | RES, CHIP 68K (1005) |
| R121 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R122 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R123 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R124 | 1-208-891-81 | s | RES, CHIP 1.5K (1005) |
| R125 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R126 | 1-208-907-81 | s | RES, CHIP 6.8K (1005) |
| R127 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R128 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R129 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R130 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R131 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |

(AVP-6 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R132 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R133 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R134 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R135 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R136 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R137 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R138 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R139 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R141 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R144 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R146 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R147 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R148 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R149 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R150 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R151 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R152 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R154 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R155 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R156 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R157 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R159 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R160 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R161 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R162 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R163 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R164 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R165 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R166 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R167 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R200 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R201 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R202 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R203 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R204 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R205 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R206 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R207 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R209 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R210 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R211 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R212 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R217 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R219 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R220 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R222 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R223 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R224 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R300 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R301 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R302 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R303 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R304 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R305 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R306 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R307 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R308 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R309 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R310 | 1-208-863-81 | s | RES, CHIP 100 (1005) |

(AVP-6 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R311 | 1-208-959-81 | s | RES, CHIP 1M (1005) |
| R312 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R313 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R314 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R315 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R316 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R317 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R318 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R319 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R320 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R321 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R322 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R323 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R324 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R325 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R326 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R327 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R328 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R329 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R330 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R331 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R332 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R333 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R334 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R335 | 1-208-860-81 | s | RES, CHIP 75 (1005) |
| R336 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R337 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R338 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R339 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R340 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R341 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R342 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R343 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R344 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R345 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R346 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R347 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R348 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R349 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R350 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R351 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R352 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R353 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R354 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R355 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R356 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R357 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R358 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R359 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R360 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R361 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R362 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R363 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R364 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R365 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R366 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R367 | 1-208-860-81 | s | RES, CHIP 75 (1005) |
| R401 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R402 | 1-208-863-81 | s | RES, CHIP 100 (1005) |

(AVP-6 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R403 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R404 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R405 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R406 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R407 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R408 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R409 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R410 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R411 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R412 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R413 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R414 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R415 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R416 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R417 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R418 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R419 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R420 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R421 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R422 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R423 | 1-208-947-81 | s | RES, CHIP 330K (1005) |
| R424 | 1-208-947-81 | s | RES, CHIP 330K (1005) |
| R425 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R426 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R429 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R430 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R431 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R434 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R435 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R436 | 1-216-801-91 | s | RES, CHIP 22 (1608) |
| R438 | 1-216-801-91 | s | RES, CHIP 22 (1608) |
| R440 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R441 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R442 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R443 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R444 | 1-208-891-81 | s | RES, CHIP 1.5K (1005) |
| R445 | 1-208-905-81 | s | RES, CHIP 5.6K (1005) |
| R446 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R447 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R448 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R449 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R450 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R451 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R452 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R453 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R454 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R455 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R456 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R457 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R458 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R459 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R460 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R462 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R463 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R464 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R465 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R466 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R467 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R468 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |

(AVP-6 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R469 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R470 | 1-216-801-91 | s | RES, CHIP 22 (1608) |
| R472 | 1-216-801-91 | s | RES, CHIP 22 (1608) |
| R500 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R501 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R502 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R503 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R504 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R505 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R506 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R507 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R508 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R509 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R510 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R511 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R512 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R513 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R514 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R515 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R516 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R517 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R518 | 1-208-899-81 | s | RES, CHIP 3.3K (1005) |
| R519 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R520 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R521 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R522 | 1-208-899-81 | s | RES, CHIP 3.3K (1005) |
| R523 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R524 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R525 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R526 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R527 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R528 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R529 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R530 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R531 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R532 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R533 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R534 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R535 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R536 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R537 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R538 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R539 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R540 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R541 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R542 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R543 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R544 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R545 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R546 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R547 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R548 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R549 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R550 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R551 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R552 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R553 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R554 | 1-216-813-91 | s | RES, CHIP 220 (1608) |
| R556 | 1-216-813-91 | s | RES, CHIP 220 (1608) |

(AVP-6 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R558 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R559 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R560 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R561 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R562 | 1-216-813-91 | s | RES, CHIP 220 (1608) |
| R564 | 1-216-813-91 | s | RES, CHIP 220 (1608) |
| R566 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R567 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R568 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R569 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R570 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R571 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R572 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R573 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R580 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R581 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R582 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R583 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R584 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R585 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R586 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R587 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R588 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R589 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R590 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R591 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R594 | 1-216-813-91 | s | RES, CHIP 220 (1608) |
| R596 | 1-216-813-91 | s | RES, CHIP 220 (1608) |
| R598 | 1-216-813-91 | s | RES, CHIP 220 (1608) |
| R599 | 1-216-813-91 | s | RES, CHIP 220 (1608) |
| R600 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R601 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R602 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R603 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R604 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R605 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R606 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R607 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R608 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R609 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R610 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R611 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R612 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R613 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R614 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R615 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R616 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R617 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R618 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R619 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R620 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R621 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R622 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R623 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R624 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R625 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R626 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R627 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R628 | 1-208-911-81 | s | RES, CHIP 10K (1005) |

(AVP-6 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R629 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R630 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R631 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R632 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R633 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R634 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R635 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R636 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R637 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R638 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R639 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R640 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R641 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R642 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R643 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R644 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R645 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R646 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R647 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R648 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R649 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R650 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R651 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R652 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R653 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R654 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R655 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R656 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R657 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R658 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R659 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R660 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R661 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R662 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R663 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R664 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R665 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R666 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R667 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R668 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R669 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R670 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R671 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R672 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R673 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R674 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R675 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R676 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R677 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R678 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R679 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R680 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R681 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R682 | 1-216-813-91 | s | RES, CHIP 220 (1608) |
| R683 | 1-216-813-91 | s | RES, CHIP 220 (1608) |
| R684 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R685 | 1-216-813-91 | s | RES, CHIP 220 (1608) |
| R686 | 1-216-813-91 | s | RES, CHIP 220 (1608) |
| R687 | 1-208-933-81 | s | RES, CHIP 82K (1005) |

(AVP-6 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R688 | 1-208-933-81 | s | RES, CHIP 82K (1005) |
| R689 | 1-208-891-81 | s | RES, CHIP 1.5K (1005) |
| R690 | 1-208-891-81 | s | RES, CHIP 1.5K (1005) |
| R691 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R692 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R693 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R694 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R695 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R696 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R697 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R698 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R699 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R700 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R701 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R702 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R703 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R704 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R705 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R706 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R707 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R708 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R709 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R710 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R711 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R712 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R713 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R714 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R715 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R716 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R717 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R718 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R719 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R720 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R721 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R722 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R723 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R724 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R725 | 1-208-861-81 | s | RES, CHIP 82 (1005) |
| R726 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R727 | 1-208-861-81 | s | RES, CHIP 82 (1005) |
| R728 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R729 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R730 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R731 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R732 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R733 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R734 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R735 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R736 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R737 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R738 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R739 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R740 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R741 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R742 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R743 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R744 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R745 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R746 | 1-208-915-81 | s | RES, CHIP 15K (1005) |

(AVP-6 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R747 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R748 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R749 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R750 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R751 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R752 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R753 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R754 | 1-208-899-81 | s | RES, CHIP 3.3K (1005) |
| R755 | 1-208-899-81 | s | RES, CHIP 3.3K (1005) |
| R756 | 1-208-899-81 | s | RES, CHIP 3.3K (1005) |
| R757 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R758 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R759 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R760 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R761 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R762 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R763 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R764 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R765 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R766 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R767 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R768 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R769 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R770 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R771 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R772 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R773 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R774 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R775 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R776 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R777 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R778 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R779 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R780 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R781 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R782 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R783 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R784 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R785 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R786 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R787 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R788 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R789 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R790 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R791 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R792 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R793 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R794 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R795 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R796 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R797 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R798 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R799 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R800 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R801 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R802 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R803 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R804 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R805 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |

(AVP-6 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R806 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R807 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R808 | 1-244-161-81 | s | RES, CHIP 2.2 (1005) |
| R809 | 1-244-161-81 | s | RES, CHIP 2.2 (1005) |
| R810 | 1-244-161-81 | s | RES, CHIP 2.2 (1005) |
| R999 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R1003 | 1-216-813-91 | s | RES, CHIP 220 (1608) |
| R1004 | 1-216-813-91 | s | RES, CHIP 220 (1608) |
| R1005 | 1-216-813-91 | s | RES, CHIP 220 (1608) |
| R1006 | 1-216-813-91 | s | RES, CHIP 220 (1608) |
| RB102 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB103 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB104 | 1-234-375-21 | s | RES, NETWORK 1K (1005X4) |
| RB105 | 1-234-375-21 | s | RES, NETWORK 1K (1005X4) |
| RB200 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB201 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB202 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB203 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB204 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB205 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB206 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB207 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB208 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB209 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB210 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB211 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB212 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB213 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB214 | 1-234-375-21 | s | RES, NETWORK 1K (1005X4) |
| RB215 | 1-234-375-21 | s | RES, NETWORK 1K (1005X4) |
| RB216 | 1-234-375-21 | s | RES, NETWORK 1K (1005X4) |
| RB217 | 1-234-375-21 | s | RES, NETWORK 1K (1005X4) |
| RB218 | 1-234-375-21 | s | RES, NETWORK 1K (1005X4) |
| RB219 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB300 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB301 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB302 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB303 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB304 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB305 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB306 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB307 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB308 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB309 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB310 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB311 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB312 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB313 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB314 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB315 | 1-234-375-21 | s | RES, NETWORK 1K (1005X4) |
| RB316 | 1-234-375-21 | s | RES, NETWORK 1K (1005X4) |
| RB400 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB501 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB502 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB601 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RV500 | 1-225-793-21 | s | RES, ADJ, CERMET 20K |
| RV501 | 1-225-793-21 | s | RES, ADJ, CERMET 20K |
| RV600 | 1-241-264-41 | s | RES, ADJ, CERMET 10K |
| RV601 | 1-241-264-41 | s | RES, ADJ, CERMET 10K |

(AVP-6 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| S1 | 1-762-775-21 | s | SWITCH, TOGGLE |
| S4 | 1-692-271-41 | s | SWITCH, SLIDE |
| S11 | 1-570-711-33 | s | SWITCH, SLIDE |
| S12 | 1-570-711-33 | s | SWITCH, SLIDE |
| S21 | 1-570-711-33 | s | SWITCH, SLIDE |
| S22 | 1-570-711-33 | s | SWITCH, SLIDE |
| S31 | 1-570-711-33 | s | SWITCH, SLIDE |
| S32 | 1-570-711-33 | s | SWITCH, SLIDE |
| S500 | 1-570-711-33 | s | SWITCH, SLIDE |
| S501 | 1-570-711-33 | s | SWITCH, SLIDE |
| S502 | 1-570-711-33 | s | SWITCH, SLIDE |
| S503 | 1-570-711-33 | s | SWITCH, SLIDE |
| S600 | 1-570-711-33 | s | SWITCH, SLIDE |
| S601 | 1-570-711-33 | s | SWITCH, SLIDE |
| S602 | 1-570-711-33 | s | SWITCH, SLIDE |
| S603 | 1-570-711-33 | s | SWITCH, SLIDE |
| T700 | 1-443-158-11 | s | TRANSFORMER, DC-DC CONVERTER |
| T701 | 1-443-158-11 | s | TRANSFORMER, DC-DC CONVERTER |
| THP100 ⚠ | 1-803-615-21 | s | THERMISTOR, POSITIVE |
| THP101 ⚠ | 1-803-615-21 | s | THERMISTOR, POSITIVE |
| THP102 ⚠ | 1-804-616-21 | s | THERMISTOR, POSITIVE |
| THP103 ⚠ | 1-804-458-21 | s | THERMISTOR, POSITIVE |
| THP104 ⚠ | 1-804-616-21 | s | THERMISTOR, POSITIVE |
| THP105 ⚠ | 1-804-616-21 | s | THERMISTOR, POSITIVE |
| THP106 ⚠ | 1-804-616-21 | s | THERMISTOR, POSITIVE |
| TP300 | 1-535-877-22 | s | CHIP, CHECKER |
| TP301 | 1-535-877-22 | s | CHIP, CHECKER |
| TP302 | 1-535-877-22 | s | CHIP, CHECKER |
| TP400 | 1-535-877-22 | s | CHIP, CHECKER |
| TP401 | 1-535-877-22 | s | CHIP, CHECKER |
| TP402 | 1-535-877-22 | s | CHIP, CHECKER |
| TP403 | 1-535-877-22 | s | CHIP, CHECKER |
| TP404 | 1-535-877-22 | s | CHIP, CHECKER |
| TP405 | 1-535-877-22 | s | CHIP, CHECKER |
| TP500 | 1-535-877-22 | s | CHIP, CHECKER |
| TP501 | 1-535-877-22 | s | CHIP, CHECKER |
| TP502 | 1-535-877-22 | s | CHIP, CHECKER |
| TP503 | 1-535-877-22 | s | CHIP, CHECKER |
| TP504 | 1-535-877-22 | s | CHIP, CHECKER |
| TP505 | 1-535-877-22 | s | CHIP, CHECKER |
| TP600 | 1-535-877-22 | s | CHIP, CHECKER |
| TP601 | 1-535-877-22 | s | CHIP, CHECKER |
| X300 | 1-813-253-12 | s | OSCILLATOR, CRYSTAL (VCXO) 5V |

---

CN-2672G BOARD

---

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| 1pc | A-1161-081-A | s | MOUNTED CIRCUIT BOARD, CN-2672G |
| 2pcs | 3-165-162-01 | s | SCREW (+P2.6X5) (TYPE1) |
| 1pc | 3-725-295-21 | s | SCREW, (+) (B3) |
| C1 | 1-164-937-81 | s | CAP, CHIPCERAMIC 1000PF B 1005 |
| C2 | 1-164-937-81 | s | CAP, CHIPCERAMIC 1000PF B 1005 |
| C3 | 1-164-937-81 | s | CAP, CHIPCERAMIC 1000PF B 1005 |
| C4 | 1-164-937-81 | s | CAP, CHIPCERAMIC 1000PF B 1005 |
| CN1 | 1-561-336-41 | s | CONNECTOR, COAXIAL |
| CN2 | 1-561-336-41 | s | CONNECTOR, COAXIAL |
| CN3 | 1-561-336-41 | s | CONNECTOR, COAXIAL |
| CN4 | 1-561-336-41 | s | CONNECTOR, COAXIAL |
| CN5 | 1-561-336-41 | s | CONNECTOR, COAXIAL |
| CN6 | 1-561-336-41 | s | CONNECTOR, COAXIAL |
| CN7 | 1-766-696-11 | o | CONNECTOR, ROUND TYPE 8P |
| CN9 | 1-778-647-31 | s | CONNECTOR, FFC/FPC(ZIF) ST 15P |
| CN10 | 1-764-079-21 | s | PIN, CONNECTOR (PC BOARD) 4P |
| CN11 | 1-764-079-21 | s | PIN, CONNECTOR (PC BOARD) 4P |
| CN12 | 1-785-125-21 | o | CONNECTOR 6P |
| CN13 | 1-785-125-21 | o | CONNECTOR 6P |
| CN14 | 1-778-652-31 | s | CONNECTOR, FFC (ZIF) 50P |
| CN15 | 1-695-480-21 | o | PIN, CONNECTOR (PC BOARD) 2P |
| FL1 | 1-239-897-31 | s | FILTER, EMI (SMD) |
| FL2 | 1-239-897-31 | s | FILTER, EMI (SMD) |
| FL3 | 1-239-897-31 | s | FILTER, EMI (SMD) |
| FL4 | 1-239-897-31 | s | FILTER, EMI (SMD) |
| FL5 | 1-239-897-31 | s | FILTER, EMI (SMD) |
| FL6 | 1-239-897-31 | s | FILTER, EMI (SMD) |
| FL7 | 1-239-897-31 | s | FILTER, EMI (SMD) |
| FL8 | 1-239-897-31 | s | FILTER, EMI (SMD) |
| FL9 | 1-239-897-31 | s | FILTER, EMI (SMD) |
| FL10 | 1-239-897-31 | s | FILTER, EMI (SMD) |
| FL11 | 1-239-897-31 | s | FILTER, EMI (SMD) |
| FL12 | 1-239-897-31 | s | FILTER, EMI (SMD) |
| JC1 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| R2 | 1-220-870-81 | s | RES, CHIP 10 (1005) |

---
CN-2673 BOARD
---

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| 1pc | A-1129-232-A | s | MOUNTED CIRCUIT BOARD, CN-2673 |
| CN1 | 1-568-005-11 | s | CONNECTOR, XLR TYPE 3P |
| CN2 | 1-568-005-11 | s | CONNECTOR, XLR TYPE 3P |
| CN3 | 1-785-125-21 | o | CONNECTOR 6P |
| FL1 | 1-239-897-31 | s | FILTER, EMI (SMD) |
| FL2 | 1-239-897-31 | s | FILTER, EMI (SMD) |
| FL3 | 1-239-897-31 | s | FILTER, EMI (SMD) |
| FL4 | 1-239-897-31 | s | FILTER, EMI (SMD) |
| FL5 | 1-239-897-31 | s | FILTER, EMI (SMD) |
| FL6 | 1-239-897-31 | s | FILTER, EMI (SMD) |
| JC2 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| JC3 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| JC5 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| JC7 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| JC8 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| JC10 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |

---
CN-2674G BOARD
---

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| 1pc | A-1161-082-A | s | MOUNTED CIRCUIT BOARD, CN-2674G |
| 1pc | 3-725-295-21 | s | SCREW, (+) (B3) |
| CN1 | 1-561-336-41 | s | CONNECTOR, COAXIAL |
| CN2 | 1-561-336-41 | s | CONNECTOR, COAXIAL |
| CN3 | 1-561-336-41 | s | CONNECTOR, COAXIAL |
| CN4 | 1-561-336-41 | s | CONNECTOR, COAXIAL |
| CN5 | 1-561-336-41 | s | CONNECTOR, COAXIAL |
| CN6 | 1-561-336-41 | s | CONNECTOR, COAXIAL |
| CN7 | 1-561-336-41 | s | CONNECTOR, COAXIAL |
| CN8 | 1-561-336-41 | s | CONNECTOR, COAXIAL |
| CN9 | 1-778-647-31 | s | CONNECTOR, FFC/FPC(ZIF) ST 15P |
| R1 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R2 | 1-220-870-81 | s | RES, CHIP 10 (1005) |

---
CN-2700 BOARD
---

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| 1pc | A-1129-236-A | s | MOUNTED CIRCUIT BOARD, CN-2700 |
| CN1 | 1-784-602-11 | s | CONNECTOR, XLR (RECEPTACLE) 5P |
| CN2 | 1-764-080-21 | o | PIN, CONNECTOR (PC BOARD) 8P |
| FL1 | 1-239-897-31 | s | FILTER, EMI (SMD) |
| FL2 | 1-239-897-31 | s | FILTER, EMI (SMD) |
| FL3 | 1-239-897-31 | s | FILTER, EMI (SMD) |
| FL4 | 1-239-897-31 | s | FILTER, EMI (SMD) |
| FL5 | 1-239-897-31 | s | FILTER, EMI (SMD) |

---
CN-2718 BOARD
---

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| 1pc | A-1129-237-A | s | MOUNTED CIRCUIT BOARD, CN-2718 |
| CN1 | ⚠ 1-691-291-11 | o | PIN, CONNECTOR (PC BOARD) 5P |
| CN2 | ⚠ 1-691-291-11 | o | PIN, CONNECTOR (PC BOARD) 5P |

---
CN-2805G BOARD
---

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| 1pc | A-1161-079-A | s | MOUNTED CIRCUIT BOARD, CN-2805G |
| C1 | 1-164-937-81 | s | CAP, CHIPCERAMIC 1000PF B 1005 |
| C2 | 1-164-937-81 | s | CAP, CHIPCERAMIC 1000PF B 1005 |
| C3 | 1-164-937-81 | s | CAP, CHIPCERAMIC 1000PF B 1005 |
| CN1 | 1-819-262-11 | s | CONNECTOR, ROUND TYPE 12P |
| CN2 | 1-785-840-31 | s | CONNECTOR, FFC/FPC(ZIF) AN 15P |
| FL1 | 1-239-897-31 | s | FILTER, EMI (SMD) |
| FL2 | 1-239-897-31 | s | FILTER, EMI (SMD) |
| FL3 | 1-239-897-31 | s | FILTER, EMI (SMD) |
| FL4 | 1-239-897-31 | s | FILTER, EMI (SMD) |
| FL5 | 1-239-897-31 | s | FILTER, EMI (SMD) |
| FL6 | 1-239-897-31 | s | FILTER, EMI (SMD) |
| FL7 | 1-239-897-31 | s | FILTER, EMI (SMD) |
| FL8 | 1-239-897-31 | s | FILTER, EMI (SMD) |

---
CNB-21G BOARD
---

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| 1pc | A-1161-080-A | s | MOUNTED CIRCUIT BOARD, CNB-21G |
| 10pcs | 7-682-545-09 | s | SCREW +B 3X4 |
| C101 | 1-164-939-81 | s | CAP, CHIPCERAMIC 2200PF B 1005 |
| C102 | 1-164-939-81 | s | CAP, CHIPCERAMIC 2200PF B 1005 |
| C103 | 1-164-939-81 | s | CAP, CHIPCERAMIC 2200PF B 1005 |
| C104 | 1-164-939-81 | s | CAP, CHIPCERAMIC 2200PF B 1005 |
| C105 | 1-164-939-81 | s | CAP, CHIPCERAMIC 2200PF B 1005 |
| C106 | 1-164-939-81 | s | CAP, CHIPCERAMIC 2200PF B 1005 |
| C107 | 1-164-939-81 | s | CAP, CHIPCERAMIC 2200PF B 1005 |
| C108 | 1-164-939-81 | s | CAP, CHIPCERAMIC 2200PF B 1005 |
| C109 | 1-164-939-81 | s | CAP, CHIPCERAMIC 2200PF B 1005 |
| C110 | 1-164-939-81 | s | CAP, CHIPCERAMIC 2200PF B 1005 |
| C111 | 1-164-939-81 | s | CAP, CHIPCERAMIC 2200PF B 1005 |
| C112 | 1-164-939-81 | s | CAP, CHIPCERAMIC 2200PF B 1005 |
| C113 | 1-164-939-81 | s | CAP, CHIPCERAMIC 2200PF B 1005 |
| C114 | 1-164-939-81 | s | CAP, CHIPCERAMIC 2200PF B 1005 |
| C115 | 1-164-939-81 | s | CAP, CHIPCERAMIC 2200PF B 1005 |
| C116 | 1-164-939-81 | s | CAP, CHIPCERAMIC 2200PF B 1005 |
| C117 | 1-164-939-81 | s | CAP, CHIPCERAMIC 2200PF B 1005 |
| C118 | 1-164-939-81 | s | CAP, CHIPCERAMIC 2200PF B 1005 |
| C119 | 1-164-939-81 | s | CAP, CHIPCERAMIC 2200PF B 1005 |
| C120 | 1-164-939-81 | s | CAP, CHIPCERAMIC 2200PF B 1005 |
| C121 | 1-164-939-81 | s | CAP, CHIPCERAMIC 2200PF B 1005 |
| C122 | 1-164-939-81 | s | CAP, CHIPCERAMIC 2200PF B 1005 |
| C123 | 1-164-939-81 | s | CAP, CHIPCERAMIC 2200PF B 1005 |
| C124 | 1-164-939-81 | s | CAP, CHIPCERAMIC 2200PF B 1005 |
| C125 | 1-164-939-81 | s | CAP, CHIPCERAMIC 2200PF B 1005 |
| C126 | 1-164-939-81 | s | CAP, CHIPCERAMIC 2200PF B 1005 |
| C127 | 1-164-939-81 | s | CAP, CHIPCERAMIC 2200PF B 1005 |
| C128 | 1-164-939-81 | s | CAP, CHIPCERAMIC 2200PF B 1005 |
| C129 | 1-164-939-81 | s | CAP, CHIPCERAMIC 2200PF B 1005 |
| C130 | 1-164-939-81 | s | CAP, CHIPCERAMIC 2200PF B 1005 |
| C131 | 1-164-939-81 | s | CAP, CHIPCERAMIC 2200PF B 1005 |
| C132 | 1-164-939-81 | s | CAP, CHIPCERAMIC 2200PF B 1005 |
| C133 | 1-164-939-81 | s | CAP, CHIPCERAMIC 2200PF B 1005 |
| C134 | 1-164-939-81 | s | CAP, CHIPCERAMIC 2200PF B 1005 |
| C135 | 1-164-939-81 | s | CAP, CHIPCERAMIC 2200PF B 1005 |
| C136 | 1-164-939-81 | s | CAP, CHIPCERAMIC 2200PF B 1005 |
| C201 | 1-164-939-81 | s | CAP, CHIPCERAMIC 2200PF B 1005 |
| C202 | 1-164-939-81 | s | CAP, CHIPCERAMIC 2200PF B 1005 |
| C203 | 1-164-939-81 | s | CAP, CHIPCERAMIC 2200PF B 1005 |
| C204 | 1-164-939-81 | s | CAP, CHIPCERAMIC 2200PF B 1005 |
| C205 | 1-164-939-81 | s | CAP, CHIPCERAMIC 2200PF B 1005 |
| C206 | 1-164-939-81 | s | CAP, CHIPCERAMIC 2200PF B 1005 |
| C207 | 1-164-939-81 | s | CAP, CHIPCERAMIC 2200PF B 1005 |
| C208 | 1-164-939-81 | s | CAP, CHIPCERAMIC 2200PF B 1005 |
| C209 | 1-164-939-81 | s | CAP, CHIPCERAMIC 2200PF B 1005 |
| C210 | 1-164-939-81 | s | CAP, CHIPCERAMIC 2200PF B 1005 |
| C211 | 1-164-939-81 | s | CAP, CHIPCERAMIC 2200PF B 1005 |
| C212 | 1-164-939-81 | s | CAP, CHIPCERAMIC 2200PF B 1005 |
| C213 | 1-164-939-81 | s | CAP, CHIPCERAMIC 2200PF B 1005 |
| C214 | 1-164-939-81 | s | CAP, CHIPCERAMIC 2200PF B 1005 |
| C215 | 1-164-939-81 | s | CAP, CHIPCERAMIC 2200PF B 1005 |
| C216 | 1-164-939-81 | s | CAP, CHIPCERAMIC 2200PF B 1005 |
| C217 | 1-164-939-81 | s | CAP, CHIPCERAMIC 2200PF B 1005 |
| C218 | 1-164-939-81 | s | CAP, CHIPCERAMIC 2200PF B 1005 |
| C219 | 1-164-939-81 | s | CAP, CHIPCERAMIC 2200PF B 1005 |
| C220 | 1-164-939-81 | s | CAP, CHIPCERAMIC 2200PF B 1005 |

(CNB-21G BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C221 | 1-164-939-81 | s | CAP, CHIPCERAMIC 2200PF B 1005 |
| C222 | 1-164-939-81 | s | CAP, CHIPCERAMIC 2200PF B 1005 |
| C223 | 1-164-939-81 | s | CAP, CHIPCERAMIC 2200PF B 1005 |
| C224 | 1-164-939-81 | s | CAP, CHIPCERAMIC 2200PF B 1005 |
| C225 | 1-164-939-81 | s | CAP, CHIPCERAMIC 2200PF B 1005 |
| C226 | 1-164-939-81 | s | CAP, CHIPCERAMIC 2200PF B 1005 |
| C227 | 1-164-939-81 | s | CAP, CHIPCERAMIC 2200PF B 1005 |
| C228 | 1-164-939-81 | s | CAP, CHIPCERAMIC 2200PF B 1005 |
| CN1 | 1-794-400-11 | s | CONNECTOR, D SUB (SMD) 25P |
| CN2 | 1-794-399-11 | s | CONNECTOR, D SUB (SMD) 15P |
| CN3 | 1-794-399-11 | s | CONNECTOR, D SUB (SMD) 15P |
| CN4 | 1-794-398-11 | s | CONNECTOR, D SUB (SMD) 9P |
| CN5 | 1-794-399-11 | s | CONNECTOR, D SUB (SMD) 15P |
| CN6 | 1-778-652-31 | s | CONNECTOR, FFC (ZIF) 50P |
| CN7 | 1-778-652-31 | s | CONNECTOR, FFC (ZIF) 50P |
| CN8 | 1-778-652-31 | s | CONNECTOR, FFC (ZIF) 50P |
| CN9 | 1-778-652-31 | s | CONNECTOR, FFC (ZIF) 50P |
| FL101 | 1-239-896-31 | s | FILTER, EMI (SMD) |
| FL102 | 1-239-896-31 | s | FILTER, EMI (SMD) |
| FL103 | 1-239-896-31 | s | FILTER, EMI (SMD) |
| FL104 | 1-239-896-31 | s | FILTER, EMI (SMD) |
| FL105 | 1-239-896-31 | s | FILTER, EMI (SMD) |
| FL106 | 1-239-896-31 | s | FILTER, EMI (SMD) |
| FL107 | 1-239-896-31 | s | FILTER, EMI (SMD) |
| FL108 | 1-239-896-31 | s | FILTER, EMI (SMD) |
| FL109 | 1-239-896-31 | s | FILTER, EMI (SMD) |
| FL110 | 1-239-896-31 | s | FILTER, EMI (SMD) |
| JC1 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| JC3 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| JC5 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| JC6 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |

---
CPU-395 BOARD
---

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| 1pc | A-1206-292-A | s | MOUNTED CIRCUIT BOARD, CPU-395 |
| 4pcs | 7-682-947-01 | s | SCREW +PSW 3X6 |
| C1 | 1-127-573-91 | s | CAP, CHIP CERAMIC 1MF B (2012) |
| C2 | 1-127-573-91 | s | CAP, CHIP CERAMIC 1MF B (2012) |
| C3 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C4 | 1-126-396-21 | s | CAP, CHIP ELECT 47MF (6.3X5.7) |
| C5 | 1-126-396-21 | s | CAP, CHIP ELECT 47MF (6.3X5.7) |
| C6 | 1-126-391-21 | s | CAP, CHIP ELECT 47MF (5X5.7) |
| C7 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C8 | 1-164-874-81 | s | CAP,CHIP CERAMIC 100PF CH 1005 |
| C9 | 1-164-874-81 | s | CAP,CHIP CERAMIC 100PF CH 1005 |
| C11 | 1-119-923-81 | s | CAP, CERAMIC 0.047MF B 1005 |
| C12 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C13 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C14 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C15 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C16 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C17 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C18 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C19 | 1-164-874-81 | s | CAP,CHIP CERAMIC 100PF CH 1005 |
| C20 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C21 | 1-164-874-81 | s | CAP,CHIP CERAMIC 100PF CH 1005 |
| C22 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C23 | 1-127-573-91 | s | CAP, CHIP CERAMIC 1MF B (2012) |
| C24 | 1-119-923-81 | s | CAP, CERAMIC 0.047MF B 1005 |
| C25 | 1-127-573-91 | s | CAP, CHIP CERAMIC 1MF B (2012) |
| C26 | 1-127-573-91 | s | CAP, CHIP CERAMIC 1MF B (2012) |
| C27 | 1-126-391-21 | s | CAP, CHIP ELECT 47MF (5X5.7) |
| C28 | 1-126-391-21 | s | CAP, CHIP ELECT 47MF (5X5.7) |
| C29 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C30 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C31 | 1-126-391-21 | s | CAP, CHIP ELECT 47MF (5X5.7) |
| C32 | 1-107-819-81 | s | CAP,CHIP CERAMIC 22000PF B1005 |
| C33 | 1-164-936-81 | s | CAP, CHIP CERAMIC 680PF B 1005 |
| C34 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C35 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C36 | 1-126-391-21 | s | CAP, CHIP ELECT 47MF (5X5.7) |
| C37 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C38 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C39 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C40 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C41 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C42 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C43 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C44 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C45 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C46 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C47 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C48 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C101 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C102 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C103 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C104 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C105 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C106 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C107 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C108 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C109 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |

(CPU-395 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C110 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C111 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C112 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C113 | 1-164-935-81 | s | CAP, CHIP CERAMIC 470PF B 1005 |
| C114 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C115 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C116 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C117 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C118 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C119 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C120 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C121 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C122 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C123 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C124 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C125 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C126 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C127 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C128 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C129 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C130 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C131 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C132 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C133 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C134 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C135 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C136 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C137 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C138 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C139 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C140 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C141 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C142 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C143 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C144 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C145 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C146 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C147 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C148 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C150 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C151 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C152 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C153 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C154 | 1-127-573-91 | s | CAP, CHIP CERAMIC 1MF B (2012) |
| C155 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C156 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C157 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C158 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C159 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C160 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C161 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C162 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C163 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C164 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C301 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C302 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C303 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C304 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C305 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |

(CPU-395 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C306 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C307 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C308 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C309 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C310 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C311 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C312 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C313 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C314 | 1-164-850-81 | s | CAP, CHIP CERAMIC 10PF CH 1005 |
| C315 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C317 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C321 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C322 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C323 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C324 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C325 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C326 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C327 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C328 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C329 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C330 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C331 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C332 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C333 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C334 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C335 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C336 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C337 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C338 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C339 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C340 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C341 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C342 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C343 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C344 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C345 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C346 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C347 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C348 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C349 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C350 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C351 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C352 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C353 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C354 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C355 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C356 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| CN101 | 1-794-917-11 | s | CONNECTOR, MEMORY STICK |
| CN102 | 1-793-093-91 | o | CONNECTOR, BOARD TO BOARD 60P |
| CN103 | 1-580-057-21 | s | PIN, CONNECTOR (SMD) 4P |
| CN104 | 1-770-628-21 | s | PIN, CONNECTOR 11P |
| CN105 | 1-770-621-21 | s | PIN, CONNECTOR 4P |
| CN301 | 1-764-093-21 | o | PIN, CONNECTOR (PC BOARD) 8P |
| D1 | 8-719-017-03 | s | DIODE 02DZ4.7-TPH3 |
| D2 | 8-719-017-03 | s | DIODE 02DZ4.7-TPH3 |
| D3 | 8-719-074-31 | s | DIODE CL-196YG-CD-T |
| D5 | 8-719-017-03 | s | DIODE 02DZ4.7-TPH3 |
| D101 | 8-719-820-42 | s | DIODE 1SS302-TE85L |

(CPU-395 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| D102 | 8-719-027-83 | s | DIODE CL-155UR/G-DT |
| D301 | 8-719-027-83 | s | DIODE CL-155UR/G-DT |
| E1 | 1-535-877-22 | s | CHIP, CHECKER |
| E2 | 1-535-877-22 | s | CHIP, CHECKER |
| E3 | 1-535-877-22 | s | CHIP, CHECKER |
| E4 | 1-535-877-22 | s | CHIP, CHECKER |
| FB1 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB2 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB303 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB304 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| IC1 | 6-704-976-01 | s | IC ADR381ARTZ-REEL7 |
| IC2 | 6-701-572-01 | s | IC TPS54610PWPR |
| IC3 | 8-759-327-01 | s | IC NJM062V(TE2) |
| IC4 | 8-759-327-01 | s | IC NJM062V(TE2) |
| IC5 | 8-759-472-43 | s | IC 74VHC245MTCX |
| IC6 | 8-759-338-95 | s | IC NJM2903V(TE2) |
| IC7 | 8-759-472-43 | s | IC 74VHC245MTCX |
| IC8 | 8-759-472-43 | s | IC 74VHC245MTCX |
| IC9 | 8-752-392-03 | s | IC CXD1095BR |
| IC11 | 8-759-669-42 | s | IC SN74LVC138APWR-12 |
| IC13 | 6-706-487-01 | s | IC TC7SH08FU(T5RSOYJF) |
| IC101 | 6-703-421-01 | s | IC HD64F7145F50 |
| IC102 | 8-759-669-42 | s | IC SN74LVC138APWR-12 |
| IC103 | 8-759-669-42 | s | IC SN74LVC138APWR-12 |
| IC104 | 8-759-447-77 | s | IC TC7WH74FU(TE12R) |
| IC105 | 8-759-447-77 | s | IC TC7WH74FU(TE12R) |
| IC106 | 8-759-546-74 | s | IC TC7WH157FU(TE12R) |
| IC107 | 8-759-546-74 | s | IC TC7WH157FU(TE12R) |
| IC108 | 8-759-363-26 | s | IC RN5VD28AA-TL-FA |
| IC109 | 8-759-392-77 | s | IC SN74LVC245APWR |
| IC110 | 6-707-760-01 | s | IC MBM29DL161TE90TN |
| IC111 | 6-707-760-01 | s | IC MBM29DL161TE90TN |
| IC112 | 8-759-669-43 | s | IC SN74LVC157APWR-12 |
| IC113 | 8-759-669-42 | s | IC SN74LVC138APWR-12 |
| IC114 | 6-707-242-01 | s | IC R1LV0416CSB-5SI |
| IC115 | 6-707-242-01 | s | IC R1LV0416CSB-5SI |
| IC116 | 8-759-598-44 | s | IC TC7WH08FK(TE85R) |
| IC117 | 6-707-947-01 | s | IC MB85R256PFTN-G-BNDE1 |
| IC118 | 6-707-947-01 | s | IC MB85R256PFTN-G-BNDE1 |
| IC120 | 6-706-478-01 | s | IC TC7SET08FU(T5RSOJF) |
| IC121 | 6-707-947-01 | s | IC MB85R256PFTN-G-BNDE1 |
| IC122 | 6-707-947-01 | s | IC MB85R256PFTN-G-BNDE1 |
| IC123 | 8-759-584-32 | s | IC MB86189PFV-G-BND-ER-E1 |
| IC125 | 8-759-598-44 | s | IC TC7WH08FK(TE85R) |
| IC126 | 8-759-392-77 | s | IC SN74LVC245APWR |
| IC127 | 6-706-483-01 | s | IC TC7SH02FU(T5RSOYJF) |
| IC128 | 6-707-869-01 | s | IC TC74VHC14FT(EKJ) |
| IC129 | 8-759-598-43 | s | IC TC7WH04FK(TE85R) |
| IC130 | 8-759-591-61 | s | IC TC7WHU04FU(TE12R) |
| IC131 | 6-704-099-01 | s | IC TC7WZ08FK(TE85R) |
| IC132 | 6-707-877-01 | s | IC TC74VHC32FT(EKJ) |
| IC133 | 6-704-099-01 | s | IC TC7WZ08FK(TE85R) |
| IC134 | 8-759-675-53 | s | IC TC7WH32FK(TE85R) |
| IC135 | 8-759-675-53 | s | IC TC7WH32FK(TE85R) |
| IC136 | 8-759-598-44 | s | IC TC7WH08FK(TE85R) |
| IC137 | 8-759-598-44 | s | IC TC7WH08FK(TE85R) |
| IC138 | 8-759-675-53 | s | IC TC7WH32FK(TE85R) |
| IC140 | 8-759-669-44 | s | IC SN74LVC74APWR-12 |

(CPU-395 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| IC301 | 8-759-594-17 | o | IC CXD9093R |
| IC302 | 6-706-487-01 | s | IC TC7SH08FU(T5RSOYJF) |
| IC303 | 8-759-598-44 | s | IC TC7WH08FK(TE85R) |
| IC305 | 8-759-598-43 | s | IC TC7WH04FK(TE85R) |
| IC306 | 8-759-598-44 | s | IC TC7WH08FK(TE85R) |
| IC308 | 8-759-598-44 | s | IC TC7WH08FK(TE85R) |
| IC309 | 6-708-538-01 | s | IC CDCVF2510APWR |
| IC310 | 6-700-804-01 | s | IC SN74LVC574APWR |
| IC311 | 8-759-363-26 | s | IC RN5VD28AA-TL-FA |
| IC313 | 8-759-598-44 | s | IC TC7WH08FK(TE85R) |
| IC314 | 8-759-598-44 | s | IC TC7WH08FK(TE85R) |
| L1 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L2 | 1-416-344-21 | s | COIL, CHOKE 10UH |
| L101 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L102 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L103 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L104 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L105 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L302 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L303 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L304 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| Q1 | 8-729-035-99 | s | TRANSISTOR 2SA1615-Z-E2 |
| Q2 | 8-729-209-73 | s | TRANSISTOR 2SA1213Y-TE12L |
| Q3 | 8-729-209-77 | s | TRANSISTOR 2SC2873Y-TE12L |
| Q5 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q101 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q102 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q103 | 8-729-209-73 | s | TRANSISTOR 2SA1213Y-TE12L |
| Q104 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q301 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q302 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q303 | 8-729-928-82 | s | TRANSISTOR DTC144EE-TL |
| R1 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R3 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R4 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R5 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R9 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R10 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R11 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R12 | 1-208-931-81 | s | RES, CHIP 68K (1005) |
| R14 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R15 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R16 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R17 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R18 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R19 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R20 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R21 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R22 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R23 | 1-208-907-81 | s | RES, CHIP 6.8K (1005) |
| R24 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R25 | 1-208-931-81 | s | RES, CHIP 68K (1005) |
| R26 | 1-208-931-81 | s | RES, CHIP 68K (1005) |
| R27 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R28 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R29 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R32 | 1-208-919-81 | s | RES, CHIP 22K (1005) |

(CPU-395 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R33 | 1-208-891-81 | s | RES, CHIP 1.5K (1005) |
| R34 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R35 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R36 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R37 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R38 | 1-208-899-81 | s | RES, CHIP 3.3K (1005) |
| R39 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R40 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R43 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R44 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R45 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R46 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R47 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R48 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R49 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R50 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R51 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R52 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R53 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R55 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R57 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R59 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R62 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R64 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R68 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R69 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R70 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R71 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R101 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R102 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R103 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R104 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R105 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R106 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R107 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R108 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R109 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R110 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R111 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R112 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R113 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R114 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R115 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R116 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R117 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R118 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R119 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R120 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R121 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R122 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R123 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R124 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R125 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R126 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R127 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R128 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R129 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R130 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R131 | 1-208-863-81 | s | RES, CHIP 100 (1005) |

(CPU-395 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R132 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R134 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R135 | 1-208-899-81 | s | RES, CHIP 3.3K (1005) |
| R136 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R137 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R138 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R139 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R140 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R141 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R144 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R145 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R149 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R150 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R151 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R152 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R153 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R154 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R155 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R156 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R157 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R158 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R159 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R160 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R161 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R162 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R163 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R164 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R165 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R166 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R167 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R169 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R170 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R172 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R173 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R174 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R175 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R176 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R177 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R178 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R179 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R180 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R181 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R182 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R183 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R184 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R186 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R187 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R188 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R189 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R190 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R191 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R192 | 1-208-899-81 | s | RES, CHIP 3.3K (1005) |
| R193 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R194 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R195 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R196 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R197 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R198 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R199 | 1-208-935-81 | s | RES, CHIP 100K (1005) |

(CPU-395 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R200 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R201 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R202 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R203 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R204 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R205 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R206 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R207 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R208 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R301 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R302 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R303 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R304 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R305 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R306 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R307 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R308 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R309 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R310 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R311 | 1-220-878-81 | s | RES, CHIP 22 (1005) |
| R312 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R313 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R314 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R315 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R316 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R317 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R318 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R319 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R320 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R321 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R322 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R323 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R324 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R325 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R326 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R327 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R328 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R329 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R330 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R331 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R334 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R335 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R336 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R337 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R338 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R339 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R340 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R341 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R342 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R343 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R344 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R345 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R346 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R347 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R348 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R349 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R350 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R351 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R352 | 1-208-863-81 | s | RES, CHIP 100 (1005) |

(CPU-395 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R353 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R354 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R355 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R356 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R357 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R358 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R359 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R360 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R361 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R362 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R365 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R366 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R367 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R368 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R369 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R370 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R371 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R372 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R373 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R374 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R375 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R376 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R377 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R378 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R379 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R380 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R381 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R382 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R384 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R386 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R387 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R388 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R389 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R390 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R391 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R392 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R393 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R394 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R395 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R396 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R397 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R398 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| RB1 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB2 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB3 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB4 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB5 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB6 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB7 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB8 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB9 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB10 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB11 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB12 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB13 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB14 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB15 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB16 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |

(CPU-395 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| RB17 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB18 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB19 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB20 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB22 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB23 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB24 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB25 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB26 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB27 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB101 | 1-234-380-21 | s | RES, NETWORK 47K (1005X4) |
| RB102 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB103 | 1-234-375-21 | s | RES, NETWORK 1K (1005X4) |
| RB104 | 1-234-375-21 | s | RES, NETWORK 1K (1005X4) |
| RB105 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB106 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB107 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB108 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB109 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB110 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB111 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB112 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB113 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB114 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB115 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB116 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB117 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB118 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB119 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB120 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB121 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB122 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB123 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB124 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB125 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB301 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB303 | 1-234-378-21 | s | RES, NETWORK 10K (1005X4) |
| RB304 | 1-234-378-21 | s | RES, NETWORK 10K (1005X4) |
| RB305 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB306 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB307 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB308 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| S1 | 1-570-711-33 | s | SWITCH, SLIDE |
| S301 | 1-692-271-41 | s | SWITCH, SLIDE |
| THP1 | ⚠ 1-804-458-21 | s | THERMISTOR, POSITIVE |
| THP2 | ⚠ 1-804-458-21 | s | THERMISTOR, POSITIVE |
| THP3 | ⚠ 1-533-817-21 | s | THERMISTOR |
| THP4 | ⚠ 1-804-458-21 | s | THERMISTOR, POSITIVE |
| THP101 | ⚠ 1-803-353-21 | s | THERMISTOR, POSITIVE |
| TP302 | 1-535-877-22 | s | CHIP, CHECKER |
| X101 | 1-795-561-21 | s | VIBRATOR, CERAMIC |
| X301 | 1-795-177-21 | s | OSCILLATOR, CRYSTAL |

---
DPR-271A BOARD
---

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| 3pcs | A-1206-289-A | s | MOUNTED CIRCUIT BOARD, DPR-271A |
| 3pcs | 3-364-941-01 | s | SCREW (+B) (2.6X5), NYLOK |
| 4pcs | 7-682-947-01 | s | SCREW +PSW 3X6 |
| C1 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C2 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C3 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C4 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C5 | 1-112-015-91 | s | CAP, CHIP CERAMIC 47MF B 3225 |
| C6 | 1-112-015-91 | s | CAP, CHIP CERAMIC 47MF B 3225 |
| C7 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C8 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C9 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C10 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C11 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C12 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C13 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C15 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C16 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C17 | 1-164-874-81 | s | CAP,CHIP CERAMIC 100PF CH 1005 |
| C18 | 1-164-874-81 | s | CAP,CHIP CERAMIC 100PF CH 1005 |
| C21 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C22 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C23 | 1-107-819-81 | s | CAP,CHIP CERAMIC 22000PF B1005 |
| C24 | 1-164-874-81 | s | CAP,CHIP CERAMIC 100PF CH 1005 |
| C25 | 1-164-874-81 | s | CAP,CHIP CERAMIC 100PF CH 1005 |
| C29 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C30 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C31 | 1-112-015-91 | s | CAP, CHIP CERAMIC 47MF B 3225 |
| C32 | 1-112-015-91 | s | CAP, CHIP CERAMIC 47MF B 3225 |
| C35 | 1-112-015-91 | s | CAP, CHIP CERAMIC 47MF B 3225 |
| C36 | 1-112-015-91 | s | CAP, CHIP CERAMIC 47MF B 3225 |
| C37 | 1-112-300-91 | s | CAP, CERAMIC 4.7MF B (2012) |
| C39 | 1-112-300-91 | s | CAP, CERAMIC 4.7MF B (2012) |
| C40 | 1-119-923-81 | s | CAP, CERAMIC 0.047MF B 1005 |
| C42 | 1-119-923-81 | s | CAP, CERAMIC 0.047MF B 1005 |
| C43 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C45 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C46 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C47 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C50 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C51 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C52 | 1-119-923-81 | s | CAP, CERAMIC 0.047MF B 1005 |
| C54 | 1-119-923-81 | s | CAP, CERAMIC 0.047MF B 1005 |
| C55 | 1-112-015-91 | s | CAP, CHIP CERAMIC 47MF B 3225 |
| C57 | 1-112-015-91 | s | CAP, CHIP CERAMIC 47MF B 3225 |
| C59 | 1-112-015-91 | s | CAP, CHIP CERAMIC 47MF B 3225 |
| C60 | 1-112-015-91 | s | CAP, CHIP CERAMIC 47MF B 3225 |
| C61 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C64 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C65 | 1-107-819-81 | s | CAP,CHIP CERAMIC 22000PF B1005 |
| C66 | 1-164-936-81 | s | CAP, CHIP CERAMIC 680PF B 1005 |
| C69 | 1-107-819-81 | s | CAP,CHIP CERAMIC 22000PF B1005 |
| C70 | 1-164-936-81 | s | CAP, CHIP CERAMIC 680PF B 1005 |
| C71 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C73 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C74 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C75 | 1-119-923-81 | s | CAP, CERAMIC 0.047MF B 1005 |
| C76 | 1-112-300-91 | s | CAP, CERAMIC 4.7MF B (2012) |

(DPR-271A BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C77 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C78 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C79 | 1-119-923-81 | s | CAP, CERAMIC 0.047MF B 1005 |
| C80 | 1-107-819-81 | s | CAP,CHIP CERAMIC 22000PF B1005 |
| C81 | 1-164-936-81 | s | CAP, CHIP CERAMIC 680PF B 1005 |
| C82 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C83 | 1-112-015-91 | s | CAP, CHIP CERAMIC 47MF B 3225 |
| C84 | 1-112-015-91 | s | CAP, CHIP CERAMIC 47MF B 3225 |
| C85 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C88 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C89 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C90 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C91 | 1-119-923-81 | s | CAP, CERAMIC 0.047MF B 1005 |
| C92 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C93 | 1-162-970-91 | s | CAP, CERAMIC 10000PF B 1608 |
| C94 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C95 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C97 | 1-125-891-91 | s | CAP, CHIP CERAMIC0.47MF B 1608 |
| C101 | 1-162-970-91 | s | CAP, CERAMIC 10000PF B 1608 |
| C102 | 1-165-908-91 | s | CAP, CERAMIC 1000000PF B 1608 |
| C103 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C105 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C106 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C107 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C108 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C109 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C110 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C203 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C204 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C205 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C206 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C207 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C208 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C209 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C210 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C301 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C302 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C303 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C304 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C305 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C306 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C307 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C308 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C401 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C501 | 1-164-866-81 | s | CAP, CHIP CERAMIC 47PF CH 1005 |
| C502 | 1-164-866-81 | s | CAP, CHIP CERAMIC 47PF CH 1005 |
| C503 | 1-164-866-81 | s | CAP, CHIP CERAMIC 47PF CH 1005 |
| C504 | 1-164-866-81 | s | CAP, CHIP CERAMIC 47PF CH 1005 |
| C505 | 1-164-866-81 | s | CAP, CHIP CERAMIC 47PF CH 1005 |
| C506 | 1-164-866-81 | s | CAP, CHIP CERAMIC 47PF CH 1005 |
| C507 | 1-164-866-81 | s | CAP, CHIP CERAMIC 47PF CH 1005 |
| C508 | 1-164-866-81 | s | CAP, CHIP CERAMIC 47PF CH 1005 |
| C509 | 1-164-866-81 | s | CAP, CHIP CERAMIC 47PF CH 1005 |
| C510 | 1-164-866-81 | s | CAP, CHIP CERAMIC 47PF CH 1005 |
| C511 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C512 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C601 | 1-112-015-91 | s | CAP, CHIP CERAMIC 47MF B 3225 |
| C602 | 1-112-015-91 | s | CAP, CHIP CERAMIC 47MF B 3225 |
| C603 | 1-112-015-91 | s | CAP, CHIP CERAMIC 47MF B 3225 |

(DPR-271A BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C604 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C605 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C606 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C607 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C608 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C609 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C610 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C611 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C612 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C613 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C614 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C615 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C616 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C617 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C618 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C619 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C620 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C621 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C622 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C623 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C624 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C625 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C626 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C627 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C628 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C629 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C630 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C631 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C632 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C633 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C634 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C635 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C636 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C637 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C638 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C639 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C640 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C641 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C642 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C643 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C644 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C645 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C646 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C647 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C648 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C649 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C650 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C651 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C652 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C653 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C654 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C655 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C656 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C657 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C658 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C659 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C660 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C661 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C662 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |

(DPR-271A BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C663 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C664 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C665 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C666 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C667 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C668 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C669 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C701 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C702 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C703 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C704 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C705 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C706 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C707 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C708 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C709 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C710 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C711 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C712 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C713 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C714 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C715 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C716 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C717 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C718 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C719 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C720 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C721 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C722 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C723 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C724 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C725 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C726 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C727 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C728 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C729 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C730 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C731 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C732 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C733 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C734 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C735 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C736 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C737 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C738 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C739 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C740 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C741 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C742 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C743 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C744 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C745 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C746 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C747 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C748 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C749 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C750 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C751 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C752 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |

(DPR-271A BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C753 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C754 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C755 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C756 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C757 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C758 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C759 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C760 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C761 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C762 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C763 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C764 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C765 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C766 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C767 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C768 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C769 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C770 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C771 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C772 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C773 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C774 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C775 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C776 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C777 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C778 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C779 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C780 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C781 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C782 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C783 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C784 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C785 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C786 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C787 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C788 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C789 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C790 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C791 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C792 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C793 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C794 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C795 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C796 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C797 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C798 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C799 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C800 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C801 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C802 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C803 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C804 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C805 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C806 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C807 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C808 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C809 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C810 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C811 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |

(DPR-271A BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C812 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C813 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C814 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C815 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C816 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C817 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C818 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C819 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C820 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C821 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C822 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C823 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C824 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C825 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C826 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C827 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C828 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C829 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C830 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C831 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C832 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C833 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C834 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C835 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C836 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C837 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C838 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C839 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C840 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C841 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C842 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C843 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C844 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C845 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C846 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C847 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C848 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C849 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C850 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C851 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C852 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C853 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C854 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C855 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C856 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C857 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C858 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C859 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C860 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C861 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C862 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C871 | 1-164-882-81 | s | CAP,CHIP CERAMIC 220PF CH 1005 |
| C872 | 1-164-882-81 | s | CAP,CHIP CERAMIC 220PF CH 1005 |
| C874 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C875 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C876 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C877 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C878 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C901 | 1-107-819-81 | s | CAP,CHIP CERAMIC 22000PF B1005 |

(DPR-271A BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C902 | 1-107-819-81 | s | CAP,CHIP CERAMIC 22000PF B1005 |
| C903 | 1-107-819-81 | s | CAP,CHIP CERAMIC 22000PF B1005 |
| C904 | 1-107-819-81 | s | CAP,CHIP CERAMIC 22000PF B1005 |
| C905 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C906 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C907 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C908 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C909 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C910 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C911 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C912 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C913 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C914 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C915 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C916 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C917 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C918 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C919 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C920 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C921 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C922 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C923 | 1-107-819-81 | s | CAP,CHIP CERAMIC 22000PF B1005 |
| C924 | 1-107-819-81 | s | CAP,CHIP CERAMIC 22000PF B1005 |
| C925 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C926 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C927 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C928 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C929 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C930 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C931 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C932 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C933 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C934 | 1-107-819-81 | s | CAP,CHIP CERAMIC 22000PF B1005 |
| C935 | 1-107-819-81 | s | CAP,CHIP CERAMIC 22000PF B1005 |
| C936 | 1-107-819-81 | s | CAP,CHIP CERAMIC 22000PF B1005 |
| C937 | 1-107-819-81 | s | CAP,CHIP CERAMIC 22000PF B1005 |
| C938 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C939 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C940 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C941 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C942 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C943 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C944 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C945 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C946 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C947 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C948 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C949 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C950 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C951 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C952 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C953 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C954 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C955 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C956 | 1-107-819-81 | s | CAP,CHIP CERAMIC 22000PF B1005 |
| C957 | 1-107-819-81 | s | CAP,CHIP CERAMIC 22000PF B1005 |
| C958 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C959 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C960 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |

(DPR-271A BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C961 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C962 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C963 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C964 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C965 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C966 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C967 | 1-107-819-81 | s | CAP,CHIP CERAMIC 22000PF B1005 |
| C968 | 1-107-819-81 | s | CAP,CHIP CERAMIC 22000PF B1005 |
| C969 | 1-107-819-81 | s | CAP,CHIP CERAMIC 22000PF B1005 |
| C970 | 1-107-819-81 | s | CAP,CHIP CERAMIC 22000PF B1005 |
| C971 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C972 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C973 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C974 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C975 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C976 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C977 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C978 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C979 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C980 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C981 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C982 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C983 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C984 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C985 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C986 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C987 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C988 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C989 | 1-107-819-81 | s | CAP,CHIP CERAMIC 22000PF B1005 |
| C990 | 1-107-819-81 | s | CAP,CHIP CERAMIC 22000PF B1005 |
| C991 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C992 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C993 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C994 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C995 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C996 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C997 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C998 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C999 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C1007 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C1013 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C1014 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C1015 | 1-164-939-81 | s | CAP, CHIPCERAMIC 2200PF B 1005 |
| C1016 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C1019 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C1020 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C1021 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C1022 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C1023 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C1025 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C1026 | 1-127-573-91 | s | CAP, CHIP CERAMIC 1MF B (2012) |
| C1027 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C1029 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C1030 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C1031 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C1032 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C1033 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C1034 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C1035 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |

(DPR-271A BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C1036 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C1037 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C1039 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C1040 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C1041 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C1042 | 1-164-939-81 | s | CAP, CHIPCERAMIC 2200PF B 1005 |
| C1043 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C1044 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C1045 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C1046 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C1047 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C1048 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C1049 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C1050 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C1052 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C1053 | 1-127-573-91 | s | CAP, CHIP CERAMIC 1MF B (2012) |
| C1054 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C1056 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C1057 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C1058 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C1059 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C1060 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C1061 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C1062 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C1063 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C1064 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C1065 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C1066 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C1068 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C1070 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C1071 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C1072 | 1-164-939-81 | s | CAP, CHIPCERAMIC 2200PF B 1005 |
| C1073 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C1074 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C1075 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C1077 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C1078 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C1079 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C1080 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C1081 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C1082 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C1083 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C1084 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C1085 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C1086 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C1087 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C1088 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C1089 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C1090 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C1091 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C1092 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C1093 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C1094 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C1095 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C1096 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C1097 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C1098 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C1099 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C1100 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |

(DPR-271A BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C1101 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C1102 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C1103 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C1104 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C1105 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C1106 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C1108 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C1109 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C1110 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C1111 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C1112 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C1113 | 1-164-939-81 | s | CAP, CHIPCERAMIC 2200PF B 1005 |
| C1114 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C1115 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C1117 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C1118 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C1119 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C1120 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C1121 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C1122 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C1123 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C1124 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C1125 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C1126 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C1127 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C1128 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C1129 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C1130 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C1131 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C1132 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C1133 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C1134 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C1135 | 1-125-891-91 | s | CAP, CHIP CERAMIC0.47MF B 1608 |
| C1136 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C1138 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C1139 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C1140 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C1141 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C1142 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C1143 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C1144 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| CN301 | 1-764-093-21 | o | PIN, CONNECTOR (PC BOARD) 8P |
| D3 | 8-719-074-31 | s | DIODE CL-196YG-CD-T |
| D4 | 8-719-820-42 | s | DIODE 1SS302-TE85L |
| D5 | 8-719-820-42 | s | DIODE 1SS302-TE85L |
| D201 | 8-719-074-31 | s | DIODE CL-196YG-CD-T |
| D202 | 8-719-074-31 | s | DIODE CL-196YG-CD-T |
| D203 | 8-719-064-41 | s | DIODE CL-191Y-CD-T |
| D204 | 8-719-064-41 | s | DIODE CL-191Y-CD-T |
| D205 | 8-719-074-31 | s | DIODE CL-196YG-CD-T |
| D206 | 8-719-074-31 | s | DIODE CL-196YG-CD-T |
| D207 | 8-719-074-31 | s | DIODE CL-196YG-CD-T |
| D208 | 8-719-074-31 | s | DIODE CL-196YG-CD-T |
| D209 | 8-719-074-31 | s | DIODE CL-196YG-CD-T |
| D210 | 8-719-074-31 | s | DIODE CL-196YG-CD-T |
| D301 | 8-719-077-09 | s | DIODE CL-196HR-CD-T |
| D1001 | 8-719-820-42 | s | DIODE 1SS302-TE85L |

(DPR-271A BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| E1 | 1-535-877-22 | s | CHIP, CHECKER |
| E2 | 1-535-877-22 | s | CHIP, CHECKER |
| E3 | 1-535-877-22 | s | CHIP, CHECKER |
| E4 | 1-535-877-22 | s | CHIP, CHECKER |
| E5 | 1-535-877-22 | s | CHIP, CHECKER |
| FB1 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB2 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB5 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB6 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB7 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB8 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB9 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB501 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB502 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB801 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB802 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB901 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB902 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB903 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB904 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB905 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB906 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB907 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB908 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB909 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB910 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB911 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB912 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB913 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB914 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB915 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB916 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB917 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB918 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB919 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB920 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB921 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB922 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB923 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB924 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB925 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB926 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB927 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB1001 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB1002 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB1003 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB1004 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB1005 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB1006 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB1007 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB1008 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB1009 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB1010 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB1011 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB1012 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB1013 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB1014 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB1015 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB1016 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |

(DPR-271A BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| FB1017 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB1018 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB1019 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB1020 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB1021 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB1022 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB1023 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB1025 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB1027 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB1028 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB1029 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB1030 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB1031 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB1032 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB1033 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB1034 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB1035 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB1036 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB1037 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB1038 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB1039 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB1040 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB1041 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| IC2 | 6-704-976-01 | s | IC ADR381ARTZ-REEL7 |
| IC3 | 8-759-327-01 | s | IC NJM062V(TE2) |
| IC4 | 6-701-572-01 | s | IC TPS54610PWPR |
| IC6 | 6-701-572-01 | s | IC TPS54610PWPR |
| IC7 | 8-759-338-95 | s | IC NJM2903V(TE2) |
| IC104 | 8-759-363-26 | s | IC RN5VD28AA-TL-FA |
| IC106 | 6-706-482-01 | s | IC TC7SH00FU(T5RSOYJF) |
| IC107 | 6-701-572-01 | s | IC TPS54610PWPR |
| IC108 | 8-759-363-26 | s | IC RN5VD28AA-TL-FA |
| IC109 | 6-706-482-01 | s | IC TC7SH00FU(T5RSOYJF) |
| IC110 | 6-700-655-01 | s | IC LT1963ES8#TR |
| IC201 | 8-759-472-43 | s | IC 74VHC245MTCX |
| IC202 | 8-759-472-43 | s | IC 74VHC245MTCX |
| IC203 | 8-759-472-43 | s | IC 74VHC245MTCX |
| IC205 | 8-752-392-03 | s | IC CXD1095BR |
| IC301 | 8-759-472-43 | s | IC 74VHC245MTCX |
| IC307 | 8-759-592-47 | s | IC TC7SZ08FU(TE85R) |
| IC402 | 8-759-592-47 | s | IC TC7SZ08FU(TE85R) |
| IC501 | 6-704-463-01 | s | IC CY7C1021CV33-15ZXCT |
| IC502 | 8-759-472-43 | s | IC 74VHC245MTCX |
| IC701 | 6-702-787-01 | s | IC UPD6467GR-525-E2 |
| IC803 | 6-708-538-01 | s | IC CDCVF2510APWR |
| IC901 | 6-706-350-01 | s | IC EDD2516AKTA-6B-E |
| IC902 | 6-706-350-01 | s | IC EDD2516AKTA-6B-E |
| IC905 | 6-706-350-01 | s | IC EDD2516AKTA-6B-E |
| IC906 | 6-706-350-01 | s | IC EDD2516AKTA-6B-E |
| IC1001 | 6-709-052-01 | s | IC GS1561-CFE3 |
| IC1002 | 6-709-052-01 | s | IC GS1561-CFE3 |
| IC1008 | 6-702-535-01 | s | IC MC100LVEL11DTR2 |
| IC1013 | 8-759-592-49 | s | IC TC7SZ125FU(TE85R) |
| IC1014 | 8-759-592-49 | s | IC TC7SZ125FU(TE85R) |
| L1 | 1-416-948-21 | s | COIL, CHOKE 10UH |
| L5 | 1-416-344-21 | s | COIL, CHOKE 10UH |
| L6 | 1-416-344-21 | s | COIL, CHOKE 10UH |
| L7 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |

(DPR-271A BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| L8 | 1-416-344-21 | s | COIL, CHOKE 10UH |
| L9 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L10 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L11 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L12 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L201 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L202 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L601 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L602 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L603 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L604 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L605 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L606 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L701 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L702 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L703 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L704 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L705 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| Q3 | 8-729-209-73 | s | TRANSISTOR 2SA1213Y-TE12L |
| Q4 | 8-729-209-73 | s | TRANSISTOR 2SA1213Y-TE12L |
| Q6 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q7 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q8 | 8-729-928-82 | s | TRANSISTOR DTC144EE-TL |
| Q10 | 8-729-928-82 | s | TRANSISTOR DTC144EE-TL |
| Q11 | 8-729-928-82 | s | TRANSISTOR DTC144EE-TL |
| Q12 | 8-729-928-82 | s | TRANSISTOR DTC144EE-TL |
| Q202 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q203 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q204 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q205 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q206 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q207 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q208 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q209 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q210 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q211 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q212 | 8-729-928-82 | s | TRANSISTOR DTC144EE-TL |
| Q301 | 8-729-928-28 | s | TRANSISTOR DTA144EE-TL |
| Q1001 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q1002 | 8-729-928-25 | s | TRANSISTOR 2SA1774TL-QR |
| Q1003 | 8-729-928-82 | s | TRANSISTOR DTC144EE-TL |
| Q1006 | 8-729-041-23 | s | TRANSISTOR NDS356AP |
| Q1007 | 8-729-928-28 | s | TRANSISTOR DTA144EE-TL |
| Q1008 | 8-729-928-82 | s | TRANSISTOR DTC144EE-TL |
| Q1009 | 8-729-928-82 | s | TRANSISTOR DTC144EE-TL |
| R5 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R6 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R7 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R8 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R11 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R12 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R13 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R14 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R15 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R16 | 1-208-907-81 | s | RES, CHIP 6.8K (1005) |
| R17 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R18 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R19 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |

(DPR-271A BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R20 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R24 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R25 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R26 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R27 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R28 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R29 | 1-208-909-81 | s | RES, CHIP 8.2K (1005) |
| R30 | 1-208-931-81 | s | RES, CHIP 68K (1005) |
| R32 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R33 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R34 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R35 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R36 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R39 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R40 | 1-208-891-81 | s | RES, CHIP 1.5K (1005) |
| R41 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R42 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R46 | 1-208-891-81 | s | RES, CHIP 1.5K (1005) |
| R47 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R48 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R49 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R51 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R52 | 1-208-899-81 | s | RES, CHIP 3.3K (1005) |
| R54 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R55 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R56 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R57 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R59 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R60 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R61 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R63 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R64 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R101 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R102 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R103 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R170 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R172 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R173 | 1-208-891-81 | s | RES, CHIP 1.5K (1005) |
| R174 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R175 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R176 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R177 | 1-208-905-81 | s | RES, CHIP 5.6K (1005) |
| R178 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R179 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R180 | 1-208-867-81 | s | RES, CHIP 150 (1005) |
| R181 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R182 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R183 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R184 | 1-218-945-81 | s | RES, CHIP 220 |
| R185 | 1-218-969-81 | s | RES, CHIP 22K |
| R186 | 1-218-953-81 | s | RES, CHIP 1.0K |
| R187 | 1-218-957-81 | s | RES, CHIP 2.2K |
| R188 | 1-218-957-81 | s | RES, CHIP 2.2K |
| R189 | 1-218-973-81 | s | RES, CHIP 47K |
| R190 | 1-218-957-81 | s | RES, CHIP 2.2K |
| R203 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R204 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R205 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R206 | 1-208-891-81 | s | RES, CHIP 1.5K (1005) |

(DPR-271A BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R207 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R208 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R209 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R210 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R211 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R212 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R213 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R214 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R215 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R216 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R217 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R218 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R219 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R220 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R222 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R223 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R226 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R227 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R229 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R231 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R232 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R233 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R234 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R235 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R236 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R237 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R238 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R239 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R240 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R241 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R244 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R245 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R249 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R251 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R252 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R253 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R301 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R302 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R303 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R308 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R309 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R310 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R312 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R317 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R318 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R319 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R320 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R321 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R322 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R323 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R324 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R325 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R327 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R328 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R330 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R331 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R332 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R333 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R335 | 1-208-863-81 | s | RES, CHIP 100 (1005) |

(DPR-271A BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R336 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R337 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R339 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R340 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R341 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R343 | 1-208-899-81 | s | RES, CHIP 3.3K (1005) |
| R401 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R402 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R403 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R404 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R405 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R406 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R407 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R408 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R409 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R410 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R414 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R521 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R522 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R523 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R524 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R525 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R526 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R527 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R528 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R529 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R530 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R531 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R532 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R533 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R534 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R535 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R536 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R537 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R538 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R539 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R540 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R541 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R542 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R543 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R544 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R545 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R546 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R547 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R548 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R549 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R550 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R551 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R552 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R553 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R554 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R555 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R556 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R557 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R558 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R559 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R560 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R561 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R562 | 1-208-856-81 | s | RES, CHIP 51 (1005) |

(DPR-271A BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R563 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R564 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R565 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R566 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R567 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R568 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R569 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R570 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R571 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R572 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R573 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R574 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R575 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R576 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R577 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R578 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R579 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R580 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R581 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R582 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R583 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R584 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R585 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R586 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R587 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R588 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R589 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R590 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R591 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R592 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R593 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R594 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R595 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R596 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R597 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R598 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R599 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R600 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R601 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R602 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R603 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R604 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R605 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R606 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R607 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R608 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R609 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R650 | 1-220-878-81 | s | RES, CHIP 22 (1005) |
| R668 | 1-220-878-81 | s | RES, CHIP 22 (1005) |
| R669 | 1-220-878-81 | s | RES, CHIP 22 (1005) |
| R670 | 1-220-878-81 | s | RES, CHIP 22 (1005) |
| R671 | 1-220-878-81 | s | RES, CHIP 22 (1005) |
| R672 | 1-220-878-81 | s | RES, CHIP 22 (1005) |
| R701 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R702 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R703 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R704 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R705 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R710 | 1-208-855-81 | s | RES, CHIP 47 (1005) |

(DPR-271A BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R715 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R716 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R717 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R718 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R719 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R720 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R721 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R722 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R723 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R724 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R725 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R727 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R728 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R730 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R731 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R732 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R733 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R734 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R801 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R802 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R804 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R807 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R808 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R809 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R810 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R811 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R812 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R817 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R818 | 1-208-867-81 | s | RES, CHIP 150 (1005) |
| R819 | 1-208-867-81 | s | RES, CHIP 150 (1005) |
| R856 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R861 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R901 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R902 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R903 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R904 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R905 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R906 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R907 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R908 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R909 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R910 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R911 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R912 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R913 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R914 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R915 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R916 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R917 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R918 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R919 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R920 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R921 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R922 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R923 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R924 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R925 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R926 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R927 | 1-208-863-81 | s | RES, CHIP 100 (1005) |

(DPR-271A BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R928 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R929 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R930 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R931 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R932 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R933 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R934 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R935 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R936 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R1020 | 1-208-925-81 | s | RES, CHIP 39K (1005) |
| R1021 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R1023 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R1024 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R1025 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R1028 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R1030 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R1031 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R1033 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R1034 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R1035 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R1036 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R1037 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R1038 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R1039 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R1041 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R1047 | 1-208-925-81 | s | RES, CHIP 39K (1005) |
| R1048 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R1050 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R1051 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R1052 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R1055 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R1057 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R1058 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R1060 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R1061 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R1062 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R1063 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R1064 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R1065 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R1067 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R1069 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R1070 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R1071 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R1072 | 1-208-867-81 | s | RES, CHIP 150 (1005) |
| R1073 | 1-220-882-81 | s | RES, CHIP 33 (1005) |
| R1074 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R1075 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R1076 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R1077 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R1078 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R1079 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R1081 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R1083 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R1084 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R1085 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R1086 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R1087 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R1088 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R1089 | 1-208-899-81 | s | RES, CHIP 3.3K (1005) |

(DPR-271A BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R1090 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R1091 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R1092 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R1093 | 1-208-867-81 | s | RES, CHIP 150 (1005) |
| R1094 | 1-208-867-81 | s | RES, CHIP 150 (1005) |
| R1095 | 1-208-867-81 | s | RES, CHIP 150 (1005) |
| R1096 | 1-208-867-81 | s | RES, CHIP 150 (1005) |
| R1102 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R1103 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R1104 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R1105 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R1106 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R1107 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R1108 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R1109 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R1110 | 1-208-899-81 | s | RES, CHIP 3.3K (1005) |
| R1111 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R1112 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R1113 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R1114 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R1115 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R1116 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R1117 | 1-220-882-81 | s | RES, CHIP 33 (1005) |
| R1118 | 1-208-867-81 | s | RES, CHIP 150 (1005) |
| R1119 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R1120 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R1121 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R1122 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R1123 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R1124 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R1125 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R1127 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R1129 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R1130 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R1132 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R1133 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R1134 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R1135 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R1136 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R1138 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R1139 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R1140 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R1143 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R1145 | 1-218-945-81 | s | RES, CHIP 220 |
| R1146 | 1-218-953-81 | s | RES, CHIP 1.0K |
| R1147 | 1-218-969-81 | s | RES, CHIP 22K |
| R1148 | 1-218-957-81 | s | RES, CHIP 2.2K |
| R1149 | 1-218-957-81 | s | RES, CHIP 2.2K |
| R1150 | 1-218-973-81 | s | RES, CHIP 47K |
| R1151 | 1-218-957-81 | s | RES, CHIP 2.2K |
| RB201 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB202 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB203 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB204 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB205 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB206 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB207 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB208 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB209 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |

(DPR-271A BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| RB210 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB211 | 1-234-369-21 | s | RES, NETWORK 10 (1005X4) |
| RB212 | 1-234-369-21 | s | RES, NETWORK 10 (1005X4) |
| RB213 | 1-234-369-21 | s | RES, NETWORK 10 (1005X4) |
| RB214 | 1-234-369-21 | s | RES, NETWORK 10 (1005X4) |
| RB215 | 1-234-369-21 | s | RES, NETWORK 10 (1005X4) |
| RB216 | 1-234-369-21 | s | RES, NETWORK 10 (1005X4) |
| RB217 | 1-234-369-21 | s | RES, NETWORK 10 (1005X4) |
| RB218 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB219 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB220 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB222 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB223 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB224 | 1-234-378-21 | s | RES, NETWORK 10K (1005X4) |
| RB225 | 1-234-378-21 | s | RES, NETWORK 10K (1005X4) |
| RB226 | 1-234-378-21 | s | RES, NETWORK 10K (1005X4) |
| RB227 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB228 | 1-234-378-21 | s | RES, NETWORK 10K (1005X4) |
| RB230 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB232 | 1-234-369-21 | s | RES, NETWORK 10 (1005X4) |
| RB233 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB234 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB235 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB236 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB239 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB240 | 1-234-369-21 | s | RES, NETWORK 10 (1005X4) |
| RB301 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB302 | 1-234-378-21 | s | RES, NETWORK 10K (1005X4) |
| RB303 | 1-234-378-21 | s | RES, NETWORK 10K (1005X4) |
| RB401 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB402 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB403 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB404 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB405 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB406 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB407 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB408 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB409 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB410 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB411 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB412 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB413 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB414 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB415 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB416 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB417 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB418 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB419 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB420 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB421 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB422 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB423 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB502 | 1-234-369-21 | s | RES, NETWORK 10 (1005X4) |
| RB503 | 1-234-369-21 | s | RES, NETWORK 10 (1005X4) |
| RB504 | 1-234-369-21 | s | RES, NETWORK 10 (1005X4) |
| RB505 | 1-234-369-21 | s | RES, NETWORK 10 (1005X4) |
| RB506 | 1-234-369-21 | s | RES, NETWORK 10 (1005X4) |
| RB507 | 1-234-375-21 | s | RES, NETWORK 1K (1005X4) |
| RB508 | 1-234-375-21 | s | RES, NETWORK 1K (1005X4) |

(DPR-271A BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| RB509 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB510 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB511 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB512 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB513 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB514 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB515 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB701 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB702 | 1-234-378-21 | s | RES, NETWORK 10K (1005X4) |
| RB703 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB704 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB705 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB706 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB707 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB708 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB709 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB710 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB711 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB712 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB713 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB714 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB715 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB716 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB717 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB718 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB719 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB720 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB721 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB722 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB723 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB724 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB725 | 1-234-369-21 | s | RES, NETWORK 10 (1005X4) |
| RB726 | 1-234-369-21 | s | RES, NETWORK 10 (1005X4) |
| RB727 | 1-234-369-21 | s | RES, NETWORK 10 (1005X4) |
| RB728 | 1-234-369-21 | s | RES, NETWORK 10 (1005X4) |
| RB729 | 1-234-369-21 | s | RES, NETWORK 10 (1005X4) |
| RB901 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB902 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB903 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB904 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB905 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB906 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB907 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB908 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB909 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB910 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB911 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB912 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB913 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB914 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB915 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB916 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB917 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB918 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB919 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB920 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB921 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB922 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB923 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |

(DPR-271A BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| RB924 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB925 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB926 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB927 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB928 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB929 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB930 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB931 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB932 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB933 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB934 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB935 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB936 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB937 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB938 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB939 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB940 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB941 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB942 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB943 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB944 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB945 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB946 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB947 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB948 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB949 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB950 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB951 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB952 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB953 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB954 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB955 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB956 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB957 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB958 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB959 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB960 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB961 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB962 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB963 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB964 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB965 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB966 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB967 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB968 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB969 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB970 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB971 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB972 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB973 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB974 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB975 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB976 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB977 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB978 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB979 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB980 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB981 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB982 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |

(DPR-271A BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| RB983 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB984 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB985 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB986 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB987 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB988 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB989 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB990 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB991 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB992 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB993 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB994 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB995 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB996 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB997 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB998 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB999 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB1006 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB1007 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB1008 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB1009 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB1010 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB1017 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB1018 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB1019 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB1020 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB1021 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| S501 | 1-692-271-41 | s | SWITCH, SLIDE |
| THP3 | ⚠ 1-533-817-21 | s | THERMISTOR |
| THP4 | ⚠ 1-533-817-21 | s | THERMISTOR |
| THP5 | ⚠ 1-533-817-21 | s | THERMISTOR |
| THP6 | ⚠ 1-533-817-21 | s | THERMISTOR |
| THP8 | ⚠ 1-533-817-21 | s | THERMISTOR |
| TP501 | 1-535-877-22 | s | CHIP, CHECKER |
| TP801 | 1-535-877-22 | s | CHIP, CHECKER |
| X803 | 1-795-872-11 | s | OSCILLATOR |
| X804 | 1-795-872-11 | s | OSCILLATOR |
| X805 | 1-795-872-11 | s | OSCILLATOR |

---
DPR-271B BOARD
---

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| 1pc | A-1206-290-A | s | MOUNTED CIRCUIT BOARD, DPR-271B |
| 3pcs | 3-364-941-01 | s | SCREW (+B) (2.6X5), NYLOK |
| 4pcs | 7-682-947-01 | s | SCREW +PSW 3X6 |
| C1 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C2 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C3 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C4 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C5 | 1-112-015-91 | s | CAP, CHIP CERAMIC 47MF B 3225 |
| C6 | 1-112-015-91 | s | CAP, CHIP CERAMIC 47MF B 3225 |
| C7 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C8 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C9 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C10 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C11 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C12 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C13 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C15 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C16 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C17 | 1-164-874-81 | s | CAP,CHIP CERAMIC 100PF CH 1005 |
| C18 | 1-164-874-81 | s | CAP,CHIP CERAMIC 100PF CH 1005 |
| C21 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C22 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C23 | 1-107-819-81 | s | CAP,CHIP CERAMIC 22000PF B1005 |
| C24 | 1-164-874-81 | s | CAP,CHIP CERAMIC 100PF CH 1005 |
| C25 | 1-164-874-81 | s | CAP,CHIP CERAMIC 100PF CH 1005 |
| C29 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C30 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C31 | 1-112-015-91 | s | CAP, CHIP CERAMIC 47MF B 3225 |
| C32 | 1-112-015-91 | s | CAP, CHIP CERAMIC 47MF B 3225 |
| C35 | 1-112-015-91 | s | CAP, CHIP CERAMIC 47MF B 3225 |
| C36 | 1-112-015-91 | s | CAP, CHIP CERAMIC 47MF B 3225 |
| C37 | 1-112-300-91 | s | CAP, CERAMIC 4.7MF B (2012) |
| C39 | 1-112-300-91 | s | CAP, CERAMIC 4.7MF B (2012) |
| C40 | 1-119-923-81 | s | CAP, CERAMIC 0.047MF B 1005 |
| C42 | 1-119-923-81 | s | CAP, CERAMIC 0.047MF B 1005 |
| C43 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C45 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C46 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C47 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C50 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C51 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C52 | 1-119-923-81 | s | CAP, CERAMIC 0.047MF B 1005 |
| C54 | 1-119-923-81 | s | CAP, CERAMIC 0.047MF B 1005 |
| C55 | 1-112-015-91 | s | CAP, CHIP CERAMIC 47MF B 3225 |
| C57 | 1-112-015-91 | s | CAP, CHIP CERAMIC 47MF B 3225 |
| C59 | 1-112-015-91 | s | CAP, CHIP CERAMIC 47MF B 3225 |
| C60 | 1-112-015-91 | s | CAP, CHIP CERAMIC 47MF B 3225 |
| C61 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C64 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C65 | 1-107-819-81 | s | CAP,CHIP CERAMIC 22000PF B1005 |
| C66 | 1-164-936-81 | s | CAP, CHIP CERAMIC 680PF B 1005 |
| C69 | 1-107-819-81 | s | CAP,CHIP CERAMIC 22000PF B1005 |
| C70 | 1-164-936-81 | s | CAP, CHIP CERAMIC 680PF B 1005 |
| C71 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C73 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C74 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C75 | 1-119-923-81 | s | CAP, CERAMIC 0.047MF B 1005 |
| C76 | 1-112-300-91 | s | CAP, CERAMIC 4.7MF B (2012) |

(DPR-271B BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C77 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C78 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C79 | 1-119-923-81 | s | CAP, CERAMIC 0.047MF B 1005 |
| C80 | 1-107-819-81 | s | CAP,CHIP CERAMIC 22000PF B1005 |
| C81 | 1-164-936-81 | s | CAP, CHIP CERAMIC 680PF B 1005 |
| C82 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C83 | 1-112-015-91 | s | CAP, CHIP CERAMIC 47MF B 3225 |
| C84 | 1-112-015-91 | s | CAP, CHIP CERAMIC 47MF B 3225 |
| C85 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C88 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C89 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C90 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C91 | 1-119-923-81 | s | CAP, CERAMIC 0.047MF B 1005 |
| C92 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C93 | 1-162-970-91 | s | CAP, CERAMIC 10000PF B 1608 |
| C94 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C95 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C97 | 1-125-891-91 | s | CAP, CHIP CERAMIC0.47MF B 1608 |
| C101 | 1-162-970-91 | s | CAP, CERAMIC 10000PF B 1608 |
| C102 | 1-165-908-91 | s | CAP, CERAMIC 1000000PF B 1608 |
| C103 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C105 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C106 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C107 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C108 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C109 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C110 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C203 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C204 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C205 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C206 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C207 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C208 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C209 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C210 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C301 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C302 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C303 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C304 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C305 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C306 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C307 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C308 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C401 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C501 | 1-164-866-81 | s | CAP, CHIP CERAMIC 47PF CH 1005 |
| C502 | 1-164-866-81 | s | CAP, CHIP CERAMIC 47PF CH 1005 |
| C503 | 1-164-866-81 | s | CAP, CHIP CERAMIC 47PF CH 1005 |
| C504 | 1-164-866-81 | s | CAP, CHIP CERAMIC 47PF CH 1005 |
| C505 | 1-164-866-81 | s | CAP, CHIP CERAMIC 47PF CH 1005 |
| C506 | 1-164-866-81 | s | CAP, CHIP CERAMIC 47PF CH 1005 |
| C507 | 1-164-866-81 | s | CAP, CHIP CERAMIC 47PF CH 1005 |
| C508 | 1-164-866-81 | s | CAP, CHIP CERAMIC 47PF CH 1005 |
| C509 | 1-164-866-81 | s | CAP, CHIP CERAMIC 47PF CH 1005 |
| C510 | 1-164-866-81 | s | CAP, CHIP CERAMIC 47PF CH 1005 |
| C511 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C512 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C601 | 1-112-015-91 | s | CAP, CHIP CERAMIC 47MF B 3225 |
| C602 | 1-112-015-91 | s | CAP, CHIP CERAMIC 47MF B 3225 |
| C603 | 1-112-015-91 | s | CAP, CHIP CERAMIC 47MF B 3225 |

(DPR-271B BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C604 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C605 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C606 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C607 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C608 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C609 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C610 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C611 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C612 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C613 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C614 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C615 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C616 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C617 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C618 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C619 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C620 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C621 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C622 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C623 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C624 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C625 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C626 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C627 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C628 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C629 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C630 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C631 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C632 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C633 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C634 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C635 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C636 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C637 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C638 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C639 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C640 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C641 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C642 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C643 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C644 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C645 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C646 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C647 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C648 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C649 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C650 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C651 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C652 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C653 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C654 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C655 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C656 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C657 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C658 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C659 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C660 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C661 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C662 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |

(DPR-271B BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C663 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C664 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C665 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C666 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C667 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C668 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C669 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C701 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C702 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C703 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C704 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C705 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C706 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C707 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C708 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C709 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C710 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C711 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C712 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C713 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C714 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C715 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C716 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C717 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C718 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C719 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C720 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C721 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C722 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C723 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C724 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C725 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C726 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C727 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C728 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C729 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C730 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C731 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C732 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C733 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C734 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C735 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C736 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C737 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C738 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C739 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C740 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C741 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C742 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C743 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C744 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C745 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C746 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C747 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C748 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C749 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C750 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C751 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C752 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |

(DPR-271B BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C753 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C754 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C755 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C756 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C757 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C758 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C759 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C760 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C761 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C762 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C763 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C764 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C765 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C766 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C767 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C768 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C769 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C770 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C771 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C772 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C773 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C774 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C775 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C776 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C777 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C778 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C779 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C780 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C781 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C782 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C783 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C784 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C785 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C786 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C787 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C788 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C789 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C790 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C791 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C792 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C793 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C794 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C795 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C796 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C797 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C798 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C799 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C800 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C801 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C802 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C803 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C804 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C805 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C806 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C807 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C808 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C809 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C810 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C811 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |

(DPR-271B BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C812 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C813 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C814 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C815 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C816 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C817 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C818 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C819 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C820 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C821 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C822 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C823 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C824 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C825 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C826 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C827 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C828 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C829 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C830 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C831 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C832 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C833 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C834 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C835 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C836 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C837 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C838 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C839 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C840 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C841 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C842 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C843 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C844 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C845 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C846 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C847 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C848 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C849 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C850 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C851 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C852 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C853 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C854 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C855 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C856 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C857 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C858 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C859 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C860 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C861 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C862 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C871 | 1-164-882-81 | s | CAP,CHIP CERAMIC 220PF CH 1005 |
| C872 | 1-164-882-81 | s | CAP,CHIP CERAMIC 220PF CH 1005 |
| C874 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C875 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C876 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C877 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C878 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C901 | 1-107-819-81 | s | CAP,CHIP CERAMIC 22000PF B1005 |

(DPR-271B BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C902 | 1-107-819-81 | s | CAP,CHIP CERAMIC 22000PF B1005 |
| C903 | 1-107-819-81 | s | CAP,CHIP CERAMIC 22000PF B1005 |
| C904 | 1-107-819-81 | s | CAP,CHIP CERAMIC 22000PF B1005 |
| C905 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C906 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C907 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C908 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C909 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C910 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C911 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C912 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C913 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C914 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C915 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C916 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C917 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C918 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C919 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C920 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C921 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C922 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C923 | 1-107-819-81 | s | CAP,CHIP CERAMIC 22000PF B1005 |
| C924 | 1-107-819-81 | s | CAP,CHIP CERAMIC 22000PF B1005 |
| C925 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C926 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C927 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C928 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C929 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C930 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C931 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C932 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C933 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C934 | 1-107-819-81 | s | CAP,CHIP CERAMIC 22000PF B1005 |
| C935 | 1-107-819-81 | s | CAP,CHIP CERAMIC 22000PF B1005 |
| C936 | 1-107-819-81 | s | CAP,CHIP CERAMIC 22000PF B1005 |
| C937 | 1-107-819-81 | s | CAP,CHIP CERAMIC 22000PF B1005 |
| C938 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C939 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C940 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C941 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C942 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C943 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C944 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C945 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C946 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C947 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C948 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C949 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C950 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C951 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C952 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C953 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C954 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C955 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C956 | 1-107-819-81 | s | CAP,CHIP CERAMIC 22000PF B1005 |
| C957 | 1-107-819-81 | s | CAP,CHIP CERAMIC 22000PF B1005 |
| C958 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C959 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C960 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |

(DPR-271B BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C961 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C962 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C963 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C964 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C965 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C966 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C967 | 1-107-819-81 | s | CAP,CHIP CERAMIC 22000PF B1005 |
| C968 | 1-107-819-81 | s | CAP,CHIP CERAMIC 22000PF B1005 |
| C969 | 1-107-819-81 | s | CAP,CHIP CERAMIC 22000PF B1005 |
| C970 | 1-107-819-81 | s | CAP,CHIP CERAMIC 22000PF B1005 |
| C971 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C972 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C973 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C974 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C975 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C976 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C977 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C978 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C979 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C980 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C981 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C982 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C983 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C984 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C985 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C986 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C987 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C988 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C989 | 1-107-819-81 | s | CAP,CHIP CERAMIC 22000PF B1005 |
| C990 | 1-107-819-81 | s | CAP,CHIP CERAMIC 22000PF B1005 |
| C991 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C992 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C993 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C994 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C995 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C996 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C997 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C998 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C999 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C1007 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C1013 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C1014 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C1015 | 1-164-939-81 | s | CAP, CHIPCERAMIC 2200PF B 1005 |
| C1016 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C1019 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C1020 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C1021 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C1022 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C1023 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C1025 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C1026 | 1-127-573-91 | s | CAP, CHIP CERAMIC 1MF B (2012) |
| C1027 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C1029 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C1030 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C1031 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C1032 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C1033 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C1034 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C1035 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |

(DPR-271B BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C1036 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C1037 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C1039 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C1040 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C1041 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C1042 | 1-164-939-81 | s | CAP, CHIPCERAMIC 2200PF B 1005 |
| C1043 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C1044 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C1045 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C1046 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C1047 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C1048 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C1049 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C1050 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C1052 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C1053 | 1-127-573-91 | s | CAP, CHIP CERAMIC 1MF B (2012) |
| C1054 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C1056 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C1057 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C1058 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C1059 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C1060 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C1061 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C1062 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C1063 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C1064 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C1065 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C1066 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C1068 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C1070 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C1071 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C1072 | 1-164-939-81 | s | CAP, CHIPCERAMIC 2200PF B 1005 |
| C1073 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C1074 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C1075 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C1077 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C1078 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C1079 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C1080 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C1081 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C1082 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C1083 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C1084 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C1085 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C1086 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C1087 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C1088 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C1089 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C1090 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C1091 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C1092 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C1093 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C1094 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C1095 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C1096 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C1097 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C1098 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C1099 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C1100 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |

(DPR-271B BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C1101 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C1102 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C1103 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C1104 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C1105 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C1106 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C1108 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C1109 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C1110 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C1111 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C1112 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C1113 | 1-164-939-81 | s | CAP, CHIPCERAMIC 2200PF B 1005 |
| C1114 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C1115 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C1117 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C1118 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C1119 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C1120 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C1121 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C1122 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C1123 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C1124 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C1125 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C1126 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C1127 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C1128 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C1129 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C1130 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C1131 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C1132 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C1133 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C1134 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C1135 | 1-125-891-91 | s | CAP, CHIP CERAMIC0.47MF B 1608 |
| C1136 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C1138 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C1139 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C1140 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C1141 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C1142 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C1143 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C1144 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C5004 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C5005 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C5006 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| CN301 | 1-764-093-21 | o | PIN, CONNECTOR (PC BOARD) 8P |
| D3 | 8-719-074-31 | s | DIODE CL-196YG-CD-T |
| D4 | 8-719-820-42 | s | DIODE 1SS302-TE85L |
| D5 | 8-719-820-42 | s | DIODE 1SS302-TE85L |
| D201 | 8-719-074-31 | s | DIODE CL-196YG-CD-T |
| D202 | 8-719-074-31 | s | DIODE CL-196YG-CD-T |
| D203 | 8-719-064-41 | s | DIODE CL-191Y-CD-T |
| D204 | 8-719-064-41 | s | DIODE CL-191Y-CD-T |
| D205 | 8-719-074-31 | s | DIODE CL-196YG-CD-T |
| D206 | 8-719-074-31 | s | DIODE CL-196YG-CD-T |
| D207 | 8-719-074-31 | s | DIODE CL-196YG-CD-T |
| D208 | 8-719-074-31 | s | DIODE CL-196YG-CD-T |
| D209 | 8-719-074-31 | s | DIODE CL-196YG-CD-T |
| D210 | 8-719-074-31 | s | DIODE CL-196YG-CD-T |

(DPR-271B BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| D301 | 8-719-077-09 | s | DIODE CL-196HR-CD-T |
| D1001 | 8-719-820-42 | s | DIODE 1SS302-TE85L |
| E1 | 1-535-877-22 | s | CHIP, CHECKER |
| E2 | 1-535-877-22 | s | CHIP, CHECKER |
| E3 | 1-535-877-22 | s | CHIP, CHECKER |
| E4 | 1-535-877-22 | s | CHIP, CHECKER |
| E5 | 1-535-877-22 | s | CHIP, CHECKER |
| FB1 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB2 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB5 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB6 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB7 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB8 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB9 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB501 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB502 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB801 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB802 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB901 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB902 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB903 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB904 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB905 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB906 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB907 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB908 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB909 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB910 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB911 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB912 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB913 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB914 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB915 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB916 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB917 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB918 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB919 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB920 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB921 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB922 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB923 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB924 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB925 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB926 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB927 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB1001 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB1002 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB1003 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB1004 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB1005 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB1006 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB1007 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB1008 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB1009 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB1010 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB1011 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB1012 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB1013 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |

(DPR-271B BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| FB1014 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB1015 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB1016 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB1017 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB1018 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB1019 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB1020 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB1021 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB1022 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB1023 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB1025 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB1027 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB1028 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB1029 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB1030 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB1031 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB1032 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB1033 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB1034 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB1035 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB1036 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB1037 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB1038 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB1039 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB1040 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB1041 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| IC2 | 6-704-976-01 | s | IC ADR381ARTZ-REEL7 |
| IC3 | 8-759-327-01 | s | IC NJM062V(TE2) |
| IC4 | 6-701-572-01 | s | IC TPS54610PWPR |
| IC6 | 6-701-572-01 | s | IC TPS54610PWPR |
| IC7 | 8-759-338-95 | s | IC NJM2903V(TE2) |
| IC104 | 8-759-363-26 | s | IC RN5VD28AA-TL-FA |
| IC106 | 6-706-482-01 | s | IC TC7SH00FU(T5RSOYJF) |
| IC107 | 6-701-572-01 | s | IC TPS54610PWPR |
| IC108 | 8-759-363-26 | s | IC RN5VD28AA-TL-FA |
| IC109 | 6-706-482-01 | s | IC TC7SH00FU(T5RSOYJF) |
| IC110 | 6-700-655-01 | s | IC LT1963ES8#TR |
| IC201 | 8-759-472-43 | s | IC 74VHC245MTCX |
| IC202 | 8-759-472-43 | s | IC 74VHC245MTCX |
| IC203 | 8-759-472-43 | s | IC 74VHC245MTCX |
| IC205 | 8-752-392-03 | s | IC CXD1095BR |
| IC301 | 8-759-472-43 | s | IC 74VHC245MTCX |
| IC307 | 8-759-592-47 | s | IC TC7SZ08FU(TE85R) |
| IC402 | 8-759-592-47 | s | IC TC7SZ08FU(TE85R) |
| IC501 | 6-704-463-01 | s | IC CY7C1021CV33-15ZXCT |
| IC502 | 8-759-472-43 | s | IC 74VHC245MTCX |
| IC701 | 6-702-787-01 | s | IC UPD6467GR-525-E2 |
| IC803 | 6-708-538-01 | s | IC CDCVF2510APWR |
| IC905 | 6-706-350-01 | s | IC EDD2516AKTA-6B-E |
| IC906 | 6-706-350-01 | s | IC EDD2516AKTA-6B-E |
| IC1008 | 6-702-535-01 | s | IC MC100LVEL11DTR2 |
| IC1013 | 8-759-592-49 | s | IC TC7SZ125FU(TE85R) |
| IC1014 | 8-759-592-49 | s | IC TC7SZ125FU(TE85R) |
| IC1015 | 6-700-655-01 | s | IC LT1963ES8#TR |
| IC5004 | 6-700-804-01 | s | IC SN74LVC574APWR |
| IC5005 | 6-700-804-01 | s | IC SN74LVC574APWR |
| IC5006 | 6-700-804-01 | s | IC SN74LVC574APWR |

(DPR-271B BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| L1 | 1-416-948-21 | s | COIL, CHOKE 10UH |
| L5 | 1-416-344-21 | s | COIL, CHOKE 10UH |
| L6 | 1-416-344-21 | s | COIL, CHOKE 10UH |
| L7 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L8 | 1-416-344-21 | s | COIL, CHOKE 10UH |
| L9 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L10 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L11 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L12 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L201 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L202 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L601 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L602 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L603 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L604 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L605 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L606 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L701 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L702 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L703 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L704 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L705 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| Q3 | 8-729-209-73 | s | TRANSISTOR 2SA1213Y-TE12L |
| Q4 | 8-729-209-73 | s | TRANSISTOR 2SA1213Y-TE12L |
| Q6 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q7 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q8 | 8-729-928-82 | s | TRANSISTOR DTC144EE-TL |
| Q10 | 8-729-928-82 | s | TRANSISTOR DTC144EE-TL |
| Q11 | 8-729-928-82 | s | TRANSISTOR DTC144EE-TL |
| Q12 | 8-729-928-82 | s | TRANSISTOR DTC144EE-TL |
| Q202 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q203 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q204 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q205 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q206 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q207 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q208 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q209 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q210 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q211 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q212 | 8-729-928-82 | s | TRANSISTOR DTC144EE-TL |
| Q301 | 8-729-928-28 | s | TRANSISTOR DTA144EE-TL |
| Q1001 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q1002 | 8-729-928-25 | s | TRANSISTOR 2SA1774TL-QR |
| Q1003 | 8-729-928-82 | s | TRANSISTOR DTC144EE-TL |
| Q1006 | 8-729-041-23 | s | TRANSISTOR NDS356AP |
| Q1007 | 8-729-928-28 | s | TRANSISTOR DTA144EE-TL |
| Q1008 | 8-729-928-82 | s | TRANSISTOR DTC144EE-TL |
| Q1009 | 8-729-928-82 | s | TRANSISTOR DTC144EE-TL |
| R5 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R6 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R7 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R8 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R11 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R12 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R13 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R14 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R15 | 1-208-919-81 | s | RES, CHIP 22K (1005) |

(DPR-271B BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R16 | 1-208-907-81 | s | RES, CHIP 6.8K (1005) |
| R17 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R18 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R19 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R20 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R24 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R25 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R26 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R27 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R28 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R29 | 1-208-909-81 | s | RES, CHIP 8.2K (1005) |
| R30 | 1-208-931-81 | s | RES, CHIP 68K (1005) |
| R32 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R33 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R34 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R35 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R36 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R39 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R40 | 1-208-891-81 | s | RES, CHIP 1.5K (1005) |
| R41 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R42 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R46 | 1-208-891-81 | s | RES, CHIP 1.5K (1005) |
| R47 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R48 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R49 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R51 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R52 | 1-208-899-81 | s | RES, CHIP 3.3K (1005) |
| R54 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R55 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R56 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R57 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R59 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R60 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R61 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R63 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R64 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R101 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R102 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R103 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R170 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R172 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R173 | 1-208-891-81 | s | RES, CHIP 1.5K (1005) |
| R174 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R175 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R176 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R177 | 1-208-905-81 | s | RES, CHIP 5.6K (1005) |
| R178 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R179 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R180 | 1-208-867-81 | s | RES, CHIP 150 (1005) |
| R181 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R182 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R183 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R184 | 1-218-945-81 | s | RES, CHIP 220 |
| R185 | 1-218-969-81 | s | RES, CHIP 22K |
| R186 | 1-218-953-81 | s | RES, CHIP 1.0K |
| R187 | 1-218-957-81 | s | RES, CHIP 2.2K |
| R188 | 1-218-957-81 | s | RES, CHIP 2.2K |
| R189 | 1-218-973-81 | s | RES, CHIP 47K |
| R190 | 1-218-957-81 | s | RES, CHIP 2.2K |

(DPR-271B BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R203 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R204 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R205 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R206 | 1-208-891-81 | s | RES, CHIP 1.5K (1005) |
| R207 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R208 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R209 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R210 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R211 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R212 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R213 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R214 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R215 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R216 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R217 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R218 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R219 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R220 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R222 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R223 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R226 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R227 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R229 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R231 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R232 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R233 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R234 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R235 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R236 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R237 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R238 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R239 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R240 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R241 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R244 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R245 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R249 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R251 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R252 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R253 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R301 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R302 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R303 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R308 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R309 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R310 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R312 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R317 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R318 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R319 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R320 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R321 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R322 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R323 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R324 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R325 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R327 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R328 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R330 | 1-208-863-81 | s | RES, CHIP 100 (1005) |

(DPR-271B BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R331 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R332 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R333 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R335 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R336 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R337 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R339 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R340 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R341 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R343 | 1-208-899-81 | s | RES, CHIP 3.3K (1005) |
| R401 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R402 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R403 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R404 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R405 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R406 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R407 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R408 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R409 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R410 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R414 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R521 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R522 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R523 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R524 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R525 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R526 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R527 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R528 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R529 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R530 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R531 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R532 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R533 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R534 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R535 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R536 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R537 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R538 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R539 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R540 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R541 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R542 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R543 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R544 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R545 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R546 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R547 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R548 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R549 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R550 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R551 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R552 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R553 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R554 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R555 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R556 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R557 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R558 | 1-208-856-81 | s | RES, CHIP 51 (1005) |

(DPR-271B BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R559 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R560 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R561 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R562 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R563 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R604 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R605 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R606 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R607 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R608 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R650 | 1-220-878-81 | s | RES, CHIP 22 (1005) |
| R668 | 1-220-878-81 | s | RES, CHIP 22 (1005) |
| R669 | 1-220-878-81 | s | RES, CHIP 22 (1005) |
| R670 | 1-220-878-81 | s | RES, CHIP 22 (1005) |
| R671 | 1-220-878-81 | s | RES, CHIP 22 (1005) |
| R672 | 1-220-878-81 | s | RES, CHIP 22 (1005) |
| R701 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R702 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R703 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R704 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R705 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R710 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R715 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R716 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R717 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R718 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R719 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R720 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R721 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R722 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R723 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R724 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R725 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R727 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R728 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R730 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R731 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R732 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R733 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R734 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R801 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R802 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R804 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R807 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R808 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R809 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R810 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R811 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R812 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R814 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R817 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R818 | 1-208-867-81 | s | RES, CHIP 150 (1005) |
| R819 | 1-208-867-81 | s | RES, CHIP 150 (1005) |
| R856 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R861 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R901 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R902 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R903 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R904 | 1-208-863-81 | s | RES, CHIP 100 (1005) |

(DPR-271B BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R905 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R906 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R907 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R908 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R909 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R910 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R911 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R912 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R913 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R914 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R915 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R916 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R917 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R918 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R919 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R920 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R921 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R922 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R923 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R924 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R925 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R926 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R927 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R928 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R929 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R930 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R931 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R932 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R933 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R934 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R935 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R936 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R1020 | 1-208-925-81 | s | RES, CHIP 39K (1005) |
| R1021 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R1023 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R1024 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R1025 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R1028 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R1030 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R1031 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R1033 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R1034 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R1035 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R1036 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R1037 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R1038 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R1039 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R1041 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R1047 | 1-208-925-81 | s | RES, CHIP 39K (1005) |
| R1048 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R1050 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R1051 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R1052 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R1055 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R1057 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R1058 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R1060 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R1061 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R1062 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |

(DPR-271B BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R1063 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R1064 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R1065 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R1067 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R1069 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R1070 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R1071 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R1072 | 1-208-867-81 | s | RES, CHIP 150 (1005) |
| R1073 | 1-220-882-81 | s | RES, CHIP 33 (1005) |
| R1074 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R1075 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R1076 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R1077 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R1078 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R1079 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R1081 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R1083 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R1084 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R1085 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R1086 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R1087 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R1088 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R1089 | 1-208-899-81 | s | RES, CHIP 3.3K (1005) |
| R1090 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R1091 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R1092 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R1093 | 1-208-867-81 | s | RES, CHIP 150 (1005) |
| R1094 | 1-208-867-81 | s | RES, CHIP 150 (1005) |
| R1095 | 1-208-867-81 | s | RES, CHIP 150 (1005) |
| R1096 | 1-208-867-81 | s | RES, CHIP 150 (1005) |
| R1102 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R1103 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R1104 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R1105 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R1106 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R1107 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R1108 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R1109 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R1110 | 1-208-899-81 | s | RES, CHIP 3.3K (1005) |
| R1111 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R1112 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R1113 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R1114 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R1115 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R1116 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R1117 | 1-220-882-81 | s | RES, CHIP 33 (1005) |
| R1118 | 1-208-867-81 | s | RES, CHIP 150 (1005) |
| R1119 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R1120 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R1121 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R1122 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R1123 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R1124 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R1125 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R1127 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R1129 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R1130 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R1132 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R1133 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |

(DPR-271B BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R1134 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R1135 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R1136 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R1138 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R1139 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R1140 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R1143 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R1145 | 1-218-945-81 | s | RES, CHIP 220 |
| R1146 | 1-218-953-81 | s | RES, CHIP 1.0K |
| R1147 | 1-218-969-81 | s | RES, CHIP 22K |
| R1148 | 1-218-957-81 | s | RES, CHIP 2.2K |
| R1149 | 1-218-957-81 | s | RES, CHIP 2.2K |
| R1150 | 1-218-973-81 | s | RES, CHIP 47K |
| R1151 | 1-218-957-81 | s | RES, CHIP 2.2K |
| R5044 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R5045 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R5046 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R5049 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R5051 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R5052 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R5053 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R5054 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R5055 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R5056 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R5057 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R5058 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R5059 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R5060 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R5061 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R5062 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R5063 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R5064 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R5065 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R5066 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R5067 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R5068 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R5069 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R5070 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R5071 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R5072 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R5073 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R5074 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R5075 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R5076 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R5077 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R5078 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R5079 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R5080 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R5081 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R5082 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R5083 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R5084 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R5085 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R5086 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R5087 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R5088 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R5089 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R5090 | 1-220-870-81 | s | RES, CHIP 10 (1005) |

(DPR-271B BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| RB201 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB202 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB203 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB204 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB205 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB206 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB207 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB208 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB209 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB210 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB211 | 1-234-369-21 | s | RES, NETWORK 10 (1005X4) |
| RB212 | 1-234-369-21 | s | RES, NETWORK 10 (1005X4) |
| RB213 | 1-234-369-21 | s | RES, NETWORK 10 (1005X4) |
| RB214 | 1-234-369-21 | s | RES, NETWORK 10 (1005X4) |
| RB215 | 1-234-369-21 | s | RES, NETWORK 10 (1005X4) |
| RB216 | 1-234-369-21 | s | RES, NETWORK 10 (1005X4) |
| RB217 | 1-234-369-21 | s | RES, NETWORK 10 (1005X4) |
| RB218 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB219 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB220 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB222 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB223 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB224 | 1-234-378-21 | s | RES, NETWORK 10K (1005X4) |
| RB225 | 1-234-378-21 | s | RES, NETWORK 10K (1005X4) |
| RB226 | 1-234-378-21 | s | RES, NETWORK 10K (1005X4) |
| RB227 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB228 | 1-234-378-21 | s | RES, NETWORK 10K (1005X4) |
| RB230 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB232 | 1-234-369-21 | s | RES, NETWORK 10 (1005X4) |
| RB233 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB234 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB235 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB236 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB239 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB240 | 1-234-369-21 | s | RES, NETWORK 10 (1005X4) |
| RB301 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB302 | 1-234-378-21 | s | RES, NETWORK 10K (1005X4) |
| RB303 | 1-234-378-21 | s | RES, NETWORK 10K (1005X4) |
| RB401 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB402 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB403 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB404 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB405 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB406 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB407 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB408 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB409 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB410 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB411 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB412 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB413 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB414 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB415 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB416 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB417 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB418 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB419 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB420 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB421 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |

(DPR-271B BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| RB422 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB423 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB502 | 1-234-369-21 | s | RES, NETWORK 10 (1005X4) |
| RB503 | 1-234-369-21 | s | RES, NETWORK 10 (1005X4) |
| RB504 | 1-234-369-21 | s | RES, NETWORK 10 (1005X4) |
| RB505 | 1-234-369-21 | s | RES, NETWORK 10 (1005X4) |
| RB506 | 1-234-369-21 | s | RES, NETWORK 10 (1005X4) |
| RB507 | 1-234-375-21 | s | RES, NETWORK 1K (1005X4) |
| RB508 | 1-234-375-21 | s | RES, NETWORK 1K (1005X4) |
| RB509 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB510 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB511 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB512 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB513 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB514 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB515 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB701 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB702 | 1-234-378-21 | s | RES, NETWORK 10K (1005X4) |
| RB703 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB704 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB705 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB706 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB707 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB708 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB709 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB710 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB711 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB712 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB713 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB714 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB715 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB716 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB717 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB718 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB719 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB720 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB721 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB722 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB723 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB724 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB725 | 1-234-369-21 | s | RES, NETWORK 10 (1005X4) |
| RB726 | 1-234-369-21 | s | RES, NETWORK 10 (1005X4) |
| RB727 | 1-234-369-21 | s | RES, NETWORK 10 (1005X4) |
| RB728 | 1-234-369-21 | s | RES, NETWORK 10 (1005X4) |
| RB729 | 1-234-369-21 | s | RES, NETWORK 10 (1005X4) |
| RB901 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB902 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB903 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB904 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB905 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB906 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB907 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB908 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB909 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB910 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB911 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB912 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB913 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB914 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |

(DPR-271B BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| RB915 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB916 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB917 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB918 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB919 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB920 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB921 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB922 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB923 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB924 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB925 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB926 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB927 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB928 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB929 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB930 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB931 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB932 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB933 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB934 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB935 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB936 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB937 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB938 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB939 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB940 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB941 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB942 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB943 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB944 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB945 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB946 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB947 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB948 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB949 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB950 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB951 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB952 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB953 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB954 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB955 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB956 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB957 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB958 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB959 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB960 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB961 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB962 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB963 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB964 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB965 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB966 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB967 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB968 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB969 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB970 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB971 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB972 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB973 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |

(DPR-271B BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| RB974 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB975 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB976 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB977 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB978 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB979 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB980 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB981 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB982 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB983 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB984 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB985 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB986 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB987 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB988 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB989 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB990 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB991 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB992 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB993 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB994 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB995 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB996 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB997 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB998 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB999 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB1006 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB1007 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB1008 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB1009 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB1010 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB1017 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB1018 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB1019 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB1020 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB1021 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB5001 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB5002 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB5003 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB5004 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB5005 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB5006 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| S501 | 1-692-271-41 | s | SWITCH, SLIDE |
| THP3 | ⚠ 1-533-817-21 | s | THERMISTOR |
| THP4 | ⚠ 1-533-817-21 | s | THERMISTOR |
| THP5 | ⚠ 1-533-817-21 | s | THERMISTOR |
| THP6 | ⚠ 1-533-817-21 | s | THERMISTOR |
| THP8 | ⚠ 1-533-817-21 | s | THERMISTOR |
| TP501 | 1-535-877-22 | s | CHIP, CHECKER |
| TP801 | 1-535-877-22 | s | CHIP, CHECKER |
| X805 | 1-795-872-11 | s | OSCILLATOR |
| X806 | 1-795-872-11 | s | OSCILLATOR |

DRX-5 BOARD

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| 1pc | A-1129-302-A | s | MOUNTED CIRCUIT BOARD, DRX-5 |
| 4pcs | 7-682-947-01 | s | SCREW +PSW 3X6 |
| C1 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C2 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C3 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C4 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C5 | 1-128-589-21 | s | CAP, CHIP ELECT 47MF |
| C6 | 1-128-589-21 | s | CAP, CHIP ELECT 47MF |
| C13 | 1-164-874-81 | s | CAP,CHIP CERAMIC 100PF CH 1005 |
| C14 | 1-164-874-81 | s | CAP,CHIP CERAMIC 100PF CH 1005 |
| C17 | 1-164-874-81 | s | CAP,CHIP CERAMIC 100PF CH 1005 |
| C18 | 1-164-874-81 | s | CAP,CHIP CERAMIC 100PF CH 1005 |
| C19 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| C20 | 1-164-874-81 | s | CAP,CHIP CERAMIC 100PF CH 1005 |
| C21 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| C22 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| C23 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| C24 | 1-164-874-81 | s | CAP,CHIP CERAMIC 100PF CH 1005 |
| C25 | 1-164-874-81 | s | CAP,CHIP CERAMIC 100PF CH 1005 |
| C26 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| C27 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C28 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C29 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C30 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C31 | 1-128-589-21 | s | CAP, CHIP ELECT 47MF |
| C32 | 1-128-589-21 | s | CAP, CHIP ELECT 47MF |
| C33 | 1-128-589-21 | s | CAP, CHIP ELECT 47MF |
| C34 | 1-128-589-21 | s | CAP, CHIP ELECT 47MF |
| C35 | 1-128-589-21 | s | CAP, CHIP ELECT 47MF |
| C36 | 1-128-589-21 | s | CAP, CHIP ELECT 47MF |
| C37 | 1-127-692-91 | s | CAP, CHIP CERAMIC 10MF B 3225 |
| C38 | 1-127-692-91 | s | CAP, CHIP CERAMIC 10MF B 3225 |
| C39 | 1-127-692-91 | s | CAP, CHIP CERAMIC 10MF B 3225 |
| C40 | 1-119-923-81 | s | CAP, CERAMIC 0.047MF B 1005 |
| C41 | 1-119-923-81 | s | CAP, CERAMIC 0.047MF B 1005 |
| C42 | 1-119-923-81 | s | CAP, CERAMIC 0.047MF B 1005 |
| C43 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C44 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C45 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C46 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C47 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C48 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C49 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C50 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C51 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C52 | 1-119-923-81 | s | CAP, CERAMIC 0.047MF B 1005 |
| C53 | 1-119-923-81 | s | CAP, CERAMIC 0.047MF B 1005 |
| C54 | 1-119-923-81 | s | CAP, CERAMIC 0.047MF B 1005 |
| C55 | 1-112-015-91 | s | CAP, CHIP CERAMIC 47MF B 3225 |
| C56 | 1-112-015-91 | s | CAP, CHIP CERAMIC 47MF B 3225 |
| C57 | 1-112-015-91 | s | CAP, CHIP CERAMIC 47MF B 3225 |
| C58 | 1-112-015-91 | s | CAP, CHIP CERAMIC 47MF B 3225 |
| C59 | 1-112-015-91 | s | CAP, CHIP CERAMIC 47MF B 3225 |
| C60 | 1-112-015-91 | s | CAP, CHIP CERAMIC 47MF B 3225 |
| C61 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C62 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C63 | 1-112-015-91 | s | CAP, CHIP CERAMIC 47MF B 3225 |
| C64 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |

(DRX-5 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C65 | 1-107-819-81 | s | CAP,CHIP CERAMIC 22000PF B1005 |
| C66 | 1-164-936-81 | s | CAP, CHIP CERAMIC 680PF B 1005 |
| C67 | 1-107-819-81 | s | CAP,CHIP CERAMIC 22000PF B1005 |
| C68 | 1-164-936-81 | s | CAP, CHIP CERAMIC 680PF B 1005 |
| C69 | 1-107-819-81 | s | CAP,CHIP CERAMIC 22000PF B1005 |
| C70 | 1-164-936-81 | s | CAP, CHIP CERAMIC 680PF B 1005 |
| C71 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C72 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C73 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C80 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C81 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C82 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C83 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C84 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C85 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C86 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C87 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C88 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C89 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C90 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C91 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C92 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C93 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C94 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C101 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C103 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C105 | 1-164-939-81 | s | CAP, CHIPCERAMIC 2200PF B 1005 |
| C106 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C107 | 1-127-573-91 | s | CAP, CHIP CERAMIC 1MF B (2012) |
| C108 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C109 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C110 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C111 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C112 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C113 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C114 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C116 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C117 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C118 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C119 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C120 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C121 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C122 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C123 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C124 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C125 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C126 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C127 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C128 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C129 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C130 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C133 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C134 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C151 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C153 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C155 | 1-164-939-81 | s | CAP, CHIPCERAMIC 2200PF B 1005 |
| C156 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C157 | 1-127-573-91 | s | CAP, CHIP CERAMIC 1MF B (2012) |
| C158 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |

(DRX-5 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C159 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C160 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C161 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C162 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C163 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C164 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C166 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C167 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C168 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C169 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C170 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C171 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C172 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C173 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C174 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C175 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C176 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C177 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C178 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C179 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C180 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C183 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C184 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C201 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C202 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C203 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C204 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C205 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C206 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C207 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C208 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C209 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C210 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C211 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C212 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C213 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C214 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C215 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C216 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C217 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C218 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C219 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C251 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C310 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C401 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C402 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C403 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C404 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C405 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C406 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C407 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C408 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C409 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C410 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C411 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C412 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C413 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C414 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C415 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |

(DRX-5 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C416 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C417 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C418 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C419 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C420 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C421 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C422 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C423 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C424 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C425 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C426 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C427 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C428 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C429 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C430 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C450 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C451 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C452 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C453 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C454 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C455 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C456 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C457 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C458 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C459 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C460 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C461 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C462 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C463 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C464 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C465 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C466 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C467 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C468 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C469 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C470 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C471 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C472 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C473 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C478 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C479 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C501 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C504 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C505 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C507 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C508 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C509 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C510 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C511 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C512 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C513 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C514 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C515 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C517 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C518 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C519 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C520 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C521 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C522 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |

(DRX-5 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C523 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C601 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C602 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C603 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C604 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C605 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C606 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C607 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C608 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C609 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C610 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C611 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C612 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C613 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C614 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C615 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C616 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C617 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C618 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C619 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C620 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C621 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C622 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C623 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C624 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C625 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C626 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C627 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C628 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C629 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C630 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C631 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C632 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C701 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C702 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C703 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C704 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C705 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C706 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C707 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C708 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C709 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C710 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C711 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C712 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C713 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C714 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C715 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C716 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C717 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C718 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C719 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C720 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C721 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C722 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C723 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C724 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C725 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C726 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |

(DRX-5 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C727 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C728 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C729 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C730 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C731 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C732 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C733 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C734 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C735 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C736 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C737 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C738 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C739 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C740 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C741 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C742 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C743 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C744 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C745 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C746 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C747 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C748 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C749 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C750 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C751 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C752 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C753 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C754 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C755 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C756 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C757 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C758 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C759 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C802 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C803 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C804 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C805 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C806 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C821 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C822 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C823 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C824 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C825 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C826 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C901 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C911 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C912 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C913 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C914 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C915 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C916 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C917 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C918 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C919 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C920 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C921 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C922 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C923 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C924 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |

(DRX-5 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C925 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C926 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C927 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C928 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C929 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C930 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C931 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| CN3 | 1-764-093-21 | o | PIN, CONNECTOR (PC BOARD) 8P |
| D1 | 8-719-017-03 | s | DIODE 02DZ4.7-TPH3 |
| D2 | 8-719-017-03 | s | DIODE 02DZ4.7-TPH3 |
| D3 | 8-719-074-31 | s | DIODE CL-196YG-CD-T |
| D201 | 8-719-074-31 | s | DIODE CL-196YG-CD-T |
| D202 | 8-719-074-31 | s | DIODE CL-196YG-CD-T |
| D203 | 8-719-074-31 | s | DIODE CL-196YG-CD-T |
| D204 | 8-719-064-41 | s | DIODE CL-191Y-CD-T |
| D205 | 8-719-064-41 | s | DIODE CL-191Y-CD-T |
| D206 | 8-719-074-31 | s | DIODE CL-196YG-CD-T |
| D207 | 8-719-074-31 | s | DIODE CL-196YG-CD-T |
| D208 | 8-719-074-31 | s | DIODE CL-196YG-CD-T |
| D209 | 8-719-074-31 | s | DIODE CL-196YG-CD-T |
| D210 | 8-719-074-31 | s | DIODE CL-196YG-CD-T |
| E1 | 1-535-877-22 | s | CHIP, CHECKER |
| E2 | 1-535-877-22 | s | CHIP, CHECKER |
| E3 | 1-535-877-22 | s | CHIP, CHECKER |
| E4 | 1-535-877-22 | s | CHIP, CHECKER |
| FB1 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB2 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB3 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB4 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB5 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB6 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB101 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB102 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB103 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB104 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB105 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB106 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB107 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB108 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB109 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB151 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB152 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB153 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB154 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB155 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB156 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB157 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB158 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB159 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB501 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB502 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB801 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB802 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FL501 | 1-233-891-21 | s | FILTER, LOW PASS |
| IC1 | 8-759-327-01 | s | IC NJM062V(TE2) |
| IC2 | 6-704-976-01 | s | IC ADR381ARTZ-REEL7 |

(DRX-5 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| IC3 | 8-759-327-01 | s | IC NJM062V(TE2) |
| IC4 | 6-701-572-01 | s | IC TPS54610PWPR |
| IC5 | 6-701-572-01 | s | IC TPS54610PWPR |
| IC6 | 6-701-572-01 | s | IC TPS54610PWPR |
| IC7 | 8-759-338-95 | s | IC NJM2903V(TE2) |
| IC80 | 6-700-655-01 | s | IC LT1963ES8#TR |
| IC81 | 8-759-592-42 | s | IC TC7SZ00FU(TE85R) |
| IC101 | 6-703-693-01 | s | IC GS1532-CFE3 |
| IC151 | 6-703-693-01 | s | IC GS1532-CFE3 |
| IC201 | 8-759-472-43 | s | IC 74VHC245MTCX |
| IC202 | 8-759-472-43 | s | IC 74VHC245MTCX |
| IC203 | 8-759-472-43 | s | IC 74VHC245MTCX |
| IC205 | 8-752-392-03 | s | IC CXD1095BR |
| IC206 | 8-759-592-47 | s | IC TC7SZ08FU(TE85R) |
| IC207 | 8-759-592-47 | s | IC TC7SZ08FU(TE85R) |
| IC208 | 8-759-592-47 | s | IC TC7SZ08FU(TE85R) |
| IC210 | 8-759-363-26 | s | IC RN5VD28AA-TL-FA |
| IC216 | 8-759-472-39 | s | IC 74VHC244MTCX |
| IC217 | 8-759-592-47 | s | IC TC7SZ08FU(TE85R) |
| IC218 | 8-759-679-55 | s | IC SN74LVC08APWR |
| IC219 | 8-759-523-96 | s | IC TC74VHC86FT(EL) |
| IC402 | 8-759-592-42 | s | IC TC7SZ00FU(TE85R) |
| IC403 | 8-759-592-42 | s | IC TC7SZ00FU(TE85R) |
| IC404 | 6-700-804-01 | s | IC SN74LVC574APWR |
| IC405 | 6-700-804-01 | s | IC SN74LVC574APWR |
| IC406 | 6-700-804-01 | s | IC SN74LVC574APWR |
| IC407 | 6-700-804-01 | s | IC SN74LVC574APWR |
| IC408 | 6-700-804-01 | s | IC SN74LVC574APWR |
| IC409 | 6-700-804-01 | s | IC SN74LVC574APWR |
| IC411 | 8-759-592-42 | s | IC TC7SZ00FU(TE85R) |
| IC452 | 6-704-463-01 | s | IC CY7C1021CV33-15ZXCT |
| IC453 | 8-759-592-42 | s | IC TC7SZ00FU(TE85R) |
| IC454 | 8-759-592-42 | s | IC TC7SZ00FU(TE85R) |
| IC455 | 8-759-592-42 | s | IC TC7SZ00FU(TE85R) |
| IC502 | 6-706-471-01 | s | IC THS5661AIPWR |
| IC504 | 8-759-561-46 | s | IC AD8014ARTZ-REEL7 |
| IC505 | 6-700-804-01 | s | IC SN74LVC574APWR |
| IC506 | 6-700-804-01 | s | IC SN74LVC574APWR |
| IC507 | 6-700-804-01 | s | IC SN74LVC574APWR |
| IC510 | 8-759-675-47 | s | IC SN74LVC04APWR |
| IC513 | 8-759-592-49 | s | IC TC7SZ125FU(TE85R) |
| IC514 | 8-759-592-49 | s | IC TC7SZ125FU(TE85R) |
| IC515 | 6-706-484-01 | s | IC TC7SH04FU(T5RSOYJF) |
| IC601 | 6-709-435-01 | s | IC IS42S32200C1-6TL-TR |
| IC602 | 6-709-435-01 | s | IC IS42S32200C1-6TL-TR |
| IC603 | 6-709-435-01 | s | IC IS42S32200C1-6TL-TR |
| IC604 | 6-709-435-01 | s | IC IS42S32200C1-6TL-TR |
| IC701 | 6-702-787-01 | s | IC UPD6467GR-525-E2 |
| IC702 | 6-702-787-01 | s | IC UPD6467GR-525-E2 |
| IC703 | 6-702-787-01 | s | IC UPD6467GR-525-E2 |
| IC803 | 6-708-538-01 | s | IC CDCVF2510APWR |
| IC809 | 6-706-484-01 | s | IC TC7SH04FU(T5RSOYJF) |
| IC810 | 6-706-484-01 | s | IC TC7SH04FU(T5RSOYJF) |
| IC811 | 8-759-592-49 | s | IC TC7SZ125FU(TE85R) |
| IC812 | 8-759-592-49 | s | IC TC7SZ125FU(TE85R) |
| IC813 | 8-759-592-49 | s | IC TC7SZ125FU(TE85R) |
| IC814 | 8-759-592-49 | s | IC TC7SZ125FU(TE85R) |
| IC901 | 8-759-472-43 | s | IC 74VHC245MTCX |

(DRX-5 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| JC1 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| L1 | 1-416-344-21 | s | COIL, CHOKE 10UH |
| L2 | 1-416-344-21 | s | COIL, CHOKE 10UH |
| L3 | 1-416-344-21 | s | COIL, CHOKE 10UH |
| L4 | 1-416-344-21 | s | COIL, CHOKE 10UH |
| L5 | 1-416-344-21 | s | COIL, CHOKE 10UH |
| L6 | 1-416-344-21 | s | COIL, CHOKE 10UH |
| L80 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L201 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L202 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L203 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L401 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L402 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L403 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L450 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L451 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L452 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L501 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L502 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L503 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L504 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L505 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L601 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L602 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L603 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L604 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L701 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L702 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L703 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L704 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L705 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L911 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L912 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L913 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| Q1 | 8-729-209-73 | s | TRANSISTOR 2SA1213Y-TE12L |
| Q2 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q3 | 8-729-209-73 | s | TRANSISTOR 2SA1213Y-TE12L |
| Q4 | 8-729-209-73 | s | TRANSISTOR 2SA1213Y-TE12L |
| Q5 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q6 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q7 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q202 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q203 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q204 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q205 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q206 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q207 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q208 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q209 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q210 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q211 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| R1 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R2 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R3 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R4 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R5 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R6 | 1-208-863-81 | s | RES, CHIP 100 (1005) |

(DRX-5 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R7 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R8 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R9 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R10 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R11 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R12 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R13 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R14 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R15 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R16 | 1-208-907-81 | s | RES, CHIP 6.8K (1005) |
| R17 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R18 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R19 | 1-208-907-81 | s | RES, CHIP 6.8K (1005) |
| R20 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R21 | 1-208-931-81 | s | RES, CHIP 68K (1005) |
| R22 | 1-208-931-81 | s | RES, CHIP 68K (1005) |
| R23 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R24 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R25 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R26 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R27 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R28 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R29 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R30 | 1-208-931-81 | s | RES, CHIP 68K (1005) |
| R31 | 1-208-931-81 | s | RES, CHIP 68K (1005) |
| R32 | 1-208-931-81 | s | RES, CHIP 68K (1005) |
| R33 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R34 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R35 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R36 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R37 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R38 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R40 | 1-208-891-81 | s | RES, CHIP 1.5K (1005) |
| R41 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R42 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R43 | 1-208-891-81 | s | RES, CHIP 1.5K (1005) |
| R44 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R45 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R46 | 1-208-891-81 | s | RES, CHIP 1.5K (1005) |
| R47 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R48 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R49 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R50 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R51 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R52 | 1-208-899-81 | s | RES, CHIP 3.3K (1005) |
| R53 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R54 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R55 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R56 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R57 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R58 | 1-208-907-81 | s | RES, CHIP 6.8K (1005) |
| R59 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R60 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R61 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R62 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R63 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R64 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R65 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R66 | 1-218-953-81 | s | RES, CHIP 1.0K |

(DRX-5 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R67 | 1-218-953-81 | s | RES, CHIP 1.0K |
| R68 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R69 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R80 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R81 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R82 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R83 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R84 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R110 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R111 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R113 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R116 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R118 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R119 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R120 | 1-208-859-81 | s | RES, CHIP 68 (1005) |
| R121 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R122 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R123 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R124 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R125 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R127 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R129 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R130 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R131 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R132 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R133 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R135 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R136 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R137 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R138 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R160 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R161 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R163 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R166 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R168 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R169 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R170 | 1-208-859-81 | s | RES, CHIP 68 (1005) |
| R171 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R172 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R173 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R174 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R175 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R177 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R179 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R180 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R181 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R182 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R183 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R185 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R186 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R187 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R188 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R191 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R192 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R202 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R203 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R204 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R205 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R206 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |

(DRX-5 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R207 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R208 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R209 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R210 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R211 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R212 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R213 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R214 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R215 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R216 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R217 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R218 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R219 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R221 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R222 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R223 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R225 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R227 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R228 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R231 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R232 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R233 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R234 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R235 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R236 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R237 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R239 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R250 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R251 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R252 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R253 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R254 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R301 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R305 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R306 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R307 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R310 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R311 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R312 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R313 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R314 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R315 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R316 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R401 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R402 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R403 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R404 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R405 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R406 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R407 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R408 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R411 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R412 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R413 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R417 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R418 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R419 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R420 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R450 | 1-220-870-81 | s | RES, CHIP 10 (1005) |

(DRX-5 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R451 | 1-220-878-81 | s | RES, CHIP 22 (1005) |
| R454 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R455 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R456 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R457 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R458 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R460 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R463 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R470 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R501 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R502 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R504 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R505 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R506 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R507 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R508 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R509 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R512 | 1-208-955-81 | s | RES, CHIP 680K (1005) |
| R514 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R515 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R516 | 1-208-899-81 | s | RES, CHIP 3.3K (1005) |
| R517 | 1-208-899-81 | s | RES, CHIP 3.3K (1005) |
| R518 | 1-208-899-81 | s | RES, CHIP 3.3K (1005) |
| R519 | 1-208-875-81 | s | RES, CHIP 330 (1005) |
| R520 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R521 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R522 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R524 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R525 | 1-208-875-81 | s | RES, CHIP 330 (1005) |
| R526 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R527 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R528 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R529 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R530 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R532 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R533 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R534 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R536 | 1-208-875-81 | s | RES, CHIP 330 (1005) |
| R537 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R541 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R701 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R703 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R705 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R706 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R707 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R708 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R709 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R710 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R711 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R712 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R713 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R714 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R715 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R716 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R718 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R719 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R721 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R722 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R723 | 1-208-863-81 | s | RES, CHIP 100 (1005) |

(DRX-5 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R724 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R725 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R726 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R727 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R728 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R729 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R730 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R731 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R732 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R733 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R734 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R735 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R736 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R737 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R738 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R740 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R741 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R742 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R743 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R744 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R751 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R752 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R753 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R755 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R756 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R801 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R802 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R804 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R807 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R808 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R809 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R812 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R813 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R814 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R832 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R855 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R856 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R859 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R860 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R861 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R901 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R902 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R903 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R904 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R905 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R911 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R912 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R913 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R914 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R915 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R916 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| RB105 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB106 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB107 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB108 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB109 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB110 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB155 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |

(DRX-5 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| RB156 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB157 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB158 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB159 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB160 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB201 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB202 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB203 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB204 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB205 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB206 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB207 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB208 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB209 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB210 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB211 | 1-234-369-21 | s | RES, NETWORK 10 (1005X4) |
| RB212 | 1-234-369-21 | s | RES, NETWORK 10 (1005X4) |
| RB213 | 1-234-369-21 | s | RES, NETWORK 10 (1005X4) |
| RB214 | 1-234-369-21 | s | RES, NETWORK 10 (1005X4) |
| RB215 | 1-234-369-21 | s | RES, NETWORK 10 (1005X4) |
| RB216 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB217 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB218 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB219 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB220 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB221 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB222 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB223 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB225 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB226 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB227 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB229 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB230 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB231 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB232 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB233 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB234 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB235 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB236 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB301 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB302 | 1-234-378-21 | s | RES, NETWORK 10K (1005X4) |
| RB401 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB402 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB403 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB404 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB405 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB406 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB407 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB408 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB409 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB410 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB411 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB412 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB413 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB414 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB415 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB416 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB417 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB418 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |

(DRX-5 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| RB419 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB420 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB421 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB422 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB423 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB424 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB425 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB426 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB427 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB428 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB456 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB457 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB458 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB459 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB460 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB461 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB462 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB463 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB464 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB465 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB466 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB467 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB468 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB469 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB470 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB471 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB472 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB473 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB474 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB475 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB476 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB477 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB478 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB479 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB480 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB481 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB482 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB483 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB484 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB485 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB486 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB487 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB488 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB489 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB490 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB491 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB492 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB511 | 1-234-369-21 | s | RES, NETWORK 10 (1005X4) |
| RB513 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB514 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB515 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB522 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB523 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB524 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB525 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB526 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB527 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB528 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB529 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |

(DRX-5 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| RB530 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB531 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB532 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB533 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB601 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB602 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB603 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB604 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB605 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB606 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB607 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB608 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB609 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB610 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB611 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB612 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB613 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB614 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB615 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB616 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB617 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB618 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB619 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB620 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB621 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB622 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB623 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB624 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB625 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB626 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB627 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB628 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB629 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB630 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB631 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB632 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB633 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB634 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB635 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB636 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB637 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB638 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB639 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB640 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB641 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB642 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB643 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB644 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB645 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB646 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB647 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB648 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB649 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB650 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB651 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB652 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB701 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB705 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB706 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |

(DRX-5 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| RB707 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB708 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB901 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB902 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB903 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB904 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB911 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB912 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB913 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB914 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB915 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RV1 | 1-225-791-21 | s | RES, ADJ, CERMET 5K |
| S1 | 1-572-658-21 | s | SWITCH, ROTARY |
| S2 | 1-692-271-41 | s | SWITCH, SLIDE |
| S4 | 1-570-711-33 | s | SWITCH, SLIDE |
| THP1 | ⚠ 1-533-817-21 | s | THERMISTOR |
| THP2 | ⚠ 1-533-817-21 | s | THERMISTOR |
| THP3 | ⚠ 1-533-817-21 | s | THERMISTOR |
| THP4 | ⚠ 1-533-817-21 | s | THERMISTOR |
| THP5 | ⚠ 1-533-817-21 | s | THERMISTOR |
| THP6 | ⚠ 1-533-817-21 | s | THERMISTOR |
| THP7 | ⚠ 1-533-817-21 | s | THERMISTOR |
| TP1 | 1-535-877-22 | s | CHIP, CHECKER |
| TP2 | 1-535-877-22 | s | CHIP, CHECKER |
| TP501 | 1-535-877-22 | s | CHIP, CHECKER |
| TP801 | 1-535-877-22 | s | CHIP, CHECKER |
| X101 | 1-795-872-11 | s | OSCILLATOR |
| X151 | 1-795-872-11 | s | OSCILLATOR |

DTX-5 BOARD

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| 1pc | A-1129-301-A | s | MOUNTED CIRCUIT BOARD, DTX-5 |
| 4pcs | 7-682-947-01 | s | SCREW +PSW 3X6 |
| C101 | 1-127-573-91 | s | CAP, CHIP CERAMIC 1MF B (2012) |
| C102 | 1-127-573-91 | s | CAP, CHIP CERAMIC 1MF B (2012) |
| C103 | 1-126-396-21 | s | CAP, CHIP ELECT 47MF (6.3X5.7) |
| C104 | 1-126-396-21 | s | CAP, CHIP ELECT 47MF (6.3X5.7) |
| C105 | 1-164-874-81 | s | CAP,CHIP CERAMIC 100PF CH 1005 |
| C106 | 1-164-874-81 | s | CAP,CHIP CERAMIC 100PF CH 1005 |
| C107 | 1-127-692-91 | s | CAP, CHIP CERAMIC 10MF B 3225 |
| C108 | 1-164-874-81 | s | CAP,CHIP CERAMIC 100PF CH 1005 |
| C109 | 1-127-692-91 | s | CAP, CHIP CERAMIC 10MF B 3225 |
| C110 | 1-127-573-91 | s | CAP, CHIP CERAMIC 1MF B (2012) |
| C111 | 1-127-573-91 | s | CAP, CHIP CERAMIC 1MF B (2012) |
| C112 | 1-127-573-91 | s | CAP, CHIP CERAMIC 1MF B (2012) |
| C113 | 1-128-589-21 | s | CAP, CHIP ELECT 47MF |
| C114 | 1-128-589-21 | s | CAP, CHIP ELECT 47MF |
| C115 | 1-127-573-91 | s | CAP, CHIP CERAMIC 1MF B (2012) |
| C116 | 1-128-589-21 | s | CAP, CHIP ELECT 47MF |
| C117 | 1-164-874-81 | s | CAP,CHIP CERAMIC 100PF CH 1005 |
| C118 | 1-165-629-91 | s | CAP, CERAMIC 1000000PF B(3225) |
| C119 | 1-164-874-81 | s | CAP,CHIP CERAMIC 100PF CH 1005 |
| C120 | 1-127-573-91 | s | CAP, CHIP CERAMIC 1MF B (2012) |
| C121 | 1-128-589-21 | s | CAP, CHIP ELECT 47MF |
| C122 | 1-127-573-91 | s | CAP, CHIP CERAMIC 1MF B (2012) |
| C123 | 1-128-589-21 | s | CAP, CHIP ELECT 47MF |
| C124 | 1-164-874-81 | s | CAP,CHIP CERAMIC 100PF CH 1005 |
| C125 | 1-127-692-91 | s | CAP, CHIP CERAMIC 10MF B 3225 |
| C126 | 1-164-874-81 | s | CAP,CHIP CERAMIC 100PF CH 1005 |
| C127 | 1-127-573-91 | s | CAP, CHIP CERAMIC 1MF B (2012) |
| C128 | 1-128-589-21 | s | CAP, CHIP ELECT 47MF |
| C129 | 1-127-692-91 | s | CAP, CHIP CERAMIC 10MF B 3225 |
| C130 | 1-119-923-81 | s | CAP, CERAMIC 0.047MF B 1005 |
| C131 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C132 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C133 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C134 | 1-119-923-81 | s | CAP, CERAMIC 0.047MF B 1005 |
| C135 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C136 | 1-107-819-81 | s | CAP,CHIP CERAMIC 22000PF B1005 |
| C137 | 1-164-936-81 | s | CAP, CHIP CERAMIC 680PF B 1005 |
| C138 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C139 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C140 | 1-127-692-91 | s | CAP, CHIP CERAMIC 10MF B 3225 |
| C141 | 1-127-692-91 | s | CAP, CHIP CERAMIC 10MF B 3225 |
| C142 | 1-119-923-81 | s | CAP, CERAMIC 0.047MF B 1005 |
| C143 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C144 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C145 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C146 | 1-119-923-81 | s | CAP, CERAMIC 0.047MF B 1005 |
| C147 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C148 | 1-107-819-81 | s | CAP,CHIP CERAMIC 22000PF B1005 |
| C149 | 1-164-936-81 | s | CAP, CHIP CERAMIC 680PF B 1005 |
| C150 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C151 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C152 | 1-127-692-91 | s | CAP, CHIP CERAMIC 10MF B 3225 |
| C154 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C155 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C156 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C157 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |

(DTX-5 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C158 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C159 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C160 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C161 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C162 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C163 | 1-128-589-21 | s | CAP, CHIP ELECT 47MF |
| C164 | 1-128-589-21 | s | CAP, CHIP ELECT 47MF |
| C165 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C201 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C202 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C203 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C204 | 1-164-939-81 | s | CAP, CHIPCERAMIC 2200PF B 1005 |
| C205 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C208 | 1-165-871-21 | s | CAP, ELECT 22MF (4.0X5.5) |
| C209 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C210 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C211 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C212 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C213 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C215 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C216 | 1-127-573-91 | s | CAP, CHIP CERAMIC 1MF B (2012) |
| C217 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C219 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C220 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C221 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C222 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C223 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C224 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C225 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C226 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C227 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C228 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C251 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C252 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C253 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C254 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C255 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C256 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C257 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C258 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C259 | 1-164-850-81 | s | CAP, CHIP CERAMIC 10PF CH 1005 |
| C260 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C261 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C262 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C263 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C264 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C265 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C266 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C267 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C268 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C269 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C270 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C271 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C272 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C273 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C274 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C275 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C276 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C301 | 1-128-589-21 | s | CAP, CHIP ELECT 47MF |

(DTX-5 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C302 | 1-128-589-21 | s | CAP, CHIP ELECT 47MF |
| C303 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C304 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C305 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C306 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C307 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C308 | 1-128-589-21 | s | CAP, CHIP ELECT 47MF |
| C309 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C310 | 1-128-589-21 | s | CAP, CHIP ELECT 47MF |
| C311 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C312 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C313 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C315 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C316 | 1-128-589-21 | s | CAP, CHIP ELECT 47MF |
| C317 | 1-128-589-21 | s | CAP, CHIP ELECT 47MF |
| C319 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C353 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C354 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C355 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C356 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C357 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C358 | 1-128-589-21 | s | CAP, CHIP ELECT 47MF |
| C359 | 1-128-589-21 | s | CAP, CHIP ELECT 47MF |
| C360 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C361 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C362 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C363 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C365 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C367 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C368 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C369 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C370 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C371 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C372 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C374 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C401 | 1-164-882-81 | s | CAP,CHIP CERAMIC 220PF CH 1005 |
| C402 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C403 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C404 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C405 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C406 | 1-128-589-21 | s | CAP, CHIP ELECT 47MF |
| C407 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C408 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C409 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C410 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C411 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C412 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C413 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C414 | 1-128-589-21 | s | CAP, CHIP ELECT 47MF |
| C415 | 1-128-589-21 | s | CAP, CHIP ELECT 47MF |
| C416 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C417 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C418 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C419 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C420 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C421 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C422 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C423 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C424 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |

(DTX-5 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C425 | 1-128-589-21 | s | CAP, CHIP ELECT 47MF |
| C426 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C427 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C428 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C429 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C430 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C431 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C432 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C433 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C434 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C501 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C502 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C503 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C504 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C505 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C506 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C507 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C508 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C509 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C510 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C511 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C512 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C513 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C515 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C516 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C517 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C518 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C519 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C520 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C521 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C522 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C523 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C524 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C525 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C526 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C527 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C528 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C529 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C530 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C531 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C532 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C533 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C534 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C535 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C536 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C537 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C538 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C539 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C540 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C541 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C542 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C601 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C602 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C603 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C604 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C605 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C606 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C607 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C608 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |

(DTX-5 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C609 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C610 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C611 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C612 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C701 | 1-128-589-21 | s | CAP, CHIP ELECT 47MF |
| C702 | 1-128-589-21 | s | CAP, CHIP ELECT 47MF |
| C703 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C704 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C705 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C706 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C707 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C708 | 1-128-589-21 | s | CAP, CHIP ELECT 47MF |
| C709 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C710 | 1-128-589-21 | s | CAP, CHIP ELECT 47MF |
| C711 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C712 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C713 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C715 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C716 | 1-128-589-21 | s | CAP, CHIP ELECT 47MF |
| C717 | 1-128-589-21 | s | CAP, CHIP ELECT 47MF |
| C719 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| CN501 | 1-764-093-21 | o | PIN, CONNECTOR (PC BOARD) 8P |
| D101 | 8-719-017-03 | s | DIODE 02DZ4.7-TPH3 |
| D102 | 8-719-017-03 | s | DIODE 02DZ4.7-TPH3 |
| D103 | 8-719-074-31 | s | DIODE CL-196YG-CD-T |
| D301 | 8-719-820-42 | s | DIODE 1SS302-TE85L |
| D601 | 8-719-074-31 | s | DIODE CL-196YG-CD-T |
| D602 | 8-719-064-41 | s | DIODE CL-191Y-CD-T |
| D603 | 8-719-077-09 | s | DIODE CL-196HR-CD-T |
| D604 | 8-719-074-31 | s | DIODE CL-196YG-CD-T |
| D605 | 8-719-064-41 | s | DIODE CL-191Y-CD-T |
| D606 | 8-719-077-09 | s | DIODE CL-196HR-CD-T |
| D701 | 8-719-820-42 | s | DIODE 1SS302-TE85L |
| E101 | 1-535-877-22 | s | CHIP, CHECKER |
| E102 | 1-535-877-22 | s | CHIP, CHECKER |
| E103 | 1-535-877-22 | s | CHIP, CHECKER |
| E104 | 1-535-877-22 | s | CHIP, CHECKER |
| FB101 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB102 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB103 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB104 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB201 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB202 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB203 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB204 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB205 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB206 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB207 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB401 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB402 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB403 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB404 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB503 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB504 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FL301 | 1-234-076-21 | s | FILTER, LOW PASS |
| FL701 | 1-234-076-21 | s | FILTER, LOW PASS |

(DTX-5 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| IC101 | 8-759-327-01 | s | IC NJM062V(TE2) |
| IC102 | 6-704-976-01 | s | IC ADR381ARTZ-REEL7 |
| IC103 | 8-759-327-01 | s | IC NJM062V(TE2) |
| IC104 | 6-701-572-01 | s | IC TPS54610PWPR |
| IC105 | 6-701-572-01 | s | IC TPS54610PWPR |
| IC106 | 8-759-338-95 | s | IC NJM2903V(TE2) |
| IC107 | 8-759-338-95 | s | IC NJM2903V(TE2) |
| IC108 | 8-759-346-27 | s | IC LM45BIM3X |
| IC109 | 6-706-482-01 | s | IC TC7SH00FU(T5RSOYJF) |
| IC201 | 6-709-052-01 | s | IC GS1561-CFE3 |
| IC251 | 8-752-078-34 | s | IC CXB1342R |
| IC301 | 8-759-561-46 | s | IC AD8014ARTZ-REEL7 |
| IC302 | 8-752-349-19 | s | IC CXD1176Q-T4 |
| IC351 | 6-708-506-01 | s | IC ML86V7666TBZ03A |
| IC402 | 8-759-472-43 | s | IC 74VHC245MTCX |
| IC403 | 6-700-804-01 | s | IC SN74LVC574APWR |
| IC404 | 6-700-804-01 | s | IC SN74LVC574APWR |
| IC405 | 6-700-804-01 | s | IC SN74LVC574APWR |
| IC502 | 8-759-472-43 | s | IC 74VHC245MTCX |
| IC503 | 6-700-804-01 | s | IC SN74LVC574APWR |
| IC504 | 8-759-472-43 | s | IC 74VHC245MTCX |
| IC507 | 6-702-787-01 | s | IC UPD6467GR-525-E2 |
| IC509 | 6-709-435-01 | s | IC IS42S32200C1-6TL-TR |
| IC510 | 6-709-435-01 | s | IC IS42S32200C1-6TL-TR |
| IC511 | 8-759-592-44 | s | IC TC7SZ04FU(TE85R) |
| IC512 | 8-759-592-44 | s | IC TC7SZ04FU(TE85R) |
| IC513 | 8-759-592-44 | s | IC TC7SZ04FU(TE85R) |
| IC514 | 8-759-592-44 | s | IC TC7SZ04FU(TE85R) |
| IC601 | 8-759-472-43 | s | IC 74VHC245MTCX |
| IC602 | 8-759-472-43 | s | IC 74VHC245MTCX |
| IC603 | 8-759-472-43 | s | IC 74VHC245MTCX |
| IC604 | 8-759-472-18 | s | IC 74VHC138MTCX |
| IC605 | 8-759-363-26 | s | IC RN5VD28AA-TL-FA |
| IC606 | 8-752-392-03 | s | IC CXD1095BR |
| IC608 | 8-759-523-79 | s | IC TC74VHC02FT(EL) |
| IC609 | 6-706-491-01 | s | IC TC7SH86FU(T5RSOYJF) |
| IC610 | 8-759-592-44 | s | IC TC7SZ04FU(TE85R) |
| IC611 | 8-752-392-03 | s | IC CXD1095BR |
| IC701 | 8-759-561-46 | s | IC AD8014ARTZ-REEL7 |
| IC702 | 8-752-349-19 | s | IC CXD1176Q-T4 |
| JC502 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| L101 | 1-416-344-21 | s | COIL, CHOKE 10UH |
| L102 | 1-416-344-21 | s | COIL, CHOKE 10UH |
| L103 | 1-416-344-21 | s | COIL, CHOKE 10UH |
| L104 | 1-416-344-21 | s | COIL, CHOKE 10UH |
| L201 | 1-414-459-21 | s | INDUCTOR, CHIP (S) 4.7NH |
| L202 | 1-414-459-21 | s | INDUCTOR, CHIP (S) 4.7NH |
| L251 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L252 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L253 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L254 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L301 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L302 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L303 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L304 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L305 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L306 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L351 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |

(DTX-5 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| L352 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L353 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L354 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L355 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L356 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L401 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L402 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L501 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L601 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L701 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L702 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L703 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L704 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L705 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L706 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| Q101 | 8-729-209-73 | s | TRANSISTOR 2SA1213Y-TE12L |
| Q102 | 8-729-209-77 | s | TRANSISTOR 2SC2873Y-TE12L |
| Q103 | 8-729-209-73 | s | TRANSISTOR 2SA1213Y-TE12L |
| Q104 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q105 | 8-729-209-73 | s | TRANSISTOR 2SA1213Y-TE12L |
| Q106 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q107 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q108 | 8-729-928-28 | s | TRANSISTOR DTA144EE-TL |
| Q109 | 8-729-041-24 | s | TRANSISTOR NDS355AN |
| Q201 | 8-729-046-30 | s | TRANSISTOR 2SC5245-4/5-TL-E |
| Q202 | 8-729-046-30 | s | TRANSISTOR 2SC5245-4/5-TL-E |
| Q301 | 8-729-928-25 | s | TRANSISTOR 2SA1774TL-QR |
| Q302 | 8-729-928-25 | s | TRANSISTOR 2SA1774TL-QR |
| Q303 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q304 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q351 | 8-729-928-25 | s | TRANSISTOR 2SA1774TL-QR |
| Q601 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q602 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q603 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q604 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q605 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q606 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q607 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q701 | 8-729-928-25 | s | TRANSISTOR 2SA1774TL-QR |
| Q702 | 8-729-928-25 | s | TRANSISTOR 2SA1774TL-QR |
| Q703 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q704 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| R101 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R102 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R103 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R104 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R105 | 1-208-931-81 | s | RES, CHIP 68K (1005) |
| R106 | 1-208-931-81 | s | RES, CHIP 68K (1005) |
| R107 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R108 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R109 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R110 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R111 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R112 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R113 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R114 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R115 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R116 | 1-208-863-81 | s | RES, CHIP 100 (1005) |

(DTX-5 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R117 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R118 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R119 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R120 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R121 | 1-208-931-81 | s | RES, CHIP 68K (1005) |
| R122 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R123 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R124 | 1-208-931-81 | s | RES, CHIP 68K (1005) |
| R125 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R126 | 1-208-891-81 | s | RES, CHIP 1.5K (1005) |
| R127 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R128 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R129 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R130 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R131 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R132 | 1-208-931-81 | s | RES, CHIP 68K (1005) |
| R133 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R134 | 1-208-891-81 | s | RES, CHIP 1.5K (1005) |
| R135 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R136 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R137 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R138 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R139 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R140 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R141 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R142 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R143 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R144 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R145 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R146 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R147 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R148 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R149 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R150 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R151 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R152 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R153 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R154 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R155 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R156 | 1-216-817-91 | s | RES, CHIP 470 (1608) |
| R157 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R158 | 1-218-831-91 | s | RES, CHIP 220 (1608) |
| R159 | 1-218-847-91 | s | RES, CHIP 1.0K (1608) |
| R160 | 1-218-847-91 | s | RES, CHIP 1.0K (1608) |
| R161 | 1-216-809-91 | s | RES, CHIP 100 (1608) |
| R201 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R202 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R203 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R204 | 1-208-875-81 | s | RES, CHIP 330 (1005) |
| R205 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R206 | 1-208-875-81 | s | RES, CHIP 330 (1005) |
| R207 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R208 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R209 | 1-208-925-81 | s | RES, CHIP 39K (1005) |
| R210 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R212 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R213 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R214 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R217 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |

(DTX-5 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R218 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R219 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R221 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R222 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R223 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R224 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R225 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R251 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R252 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R253 | 1-208-907-81 | s | RES, CHIP 6.8K (1005) |
| R254 | 1-208-860-81 | s | RES, CHIP 75 (1005) |
| R255 | 1-208-860-81 | s | RES, CHIP 75 (1005) |
| R256 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R257 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R258 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R259 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R260 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R261 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R262 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R263 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R264 | 1-208-891-81 | s | RES, CHIP 1.5K (1005) |
| R265 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R267 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R301 | 1-208-875-81 | s | RES, CHIP 330 (1005) |
| R302 | 1-220-882-81 | s | RES, CHIP 33 (1005) |
| R303 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R304 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R305 | 1-208-891-81 | s | RES, CHIP 1.5K (1005) |
| R306 | 1-208-891-81 | s | RES, CHIP 1.5K (1005) |
| R307 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R308 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R309 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R310 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R311 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R312 | 1-208-891-81 | s | RES, CHIP 1.5K (1005) |
| R313 | 1-208-875-81 | s | RES, CHIP 330 (1005) |
| R314 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R315 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R316 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R317 | 1-208-875-81 | s | RES, CHIP 330 (1005) |
| R318 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R319 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R320 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R321 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R322 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R323 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R324 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R325 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R351 | 1-208-875-81 | s | RES, CHIP 330 (1005) |
| R352 | 1-220-882-81 | s | RES, CHIP 33 (1005) |
| R353 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R354 | 1-208-891-81 | s | RES, CHIP 1.5K (1005) |
| R355 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R356 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R357 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R358 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R360 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R361 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R363 | 1-220-870-81 | s | RES, CHIP 10 (1005) |

(DTX-5 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R364 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R365 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R366 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R367 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R369 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R371 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R373 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R375 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R377 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R378 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R379 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R381 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R382 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R383 | 1-220-878-81 | s | RES, CHIP 22 (1005) |
| R385 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R386 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R387 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R388 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R389 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R401 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R402 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R403 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R404 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R405 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R406 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R407 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R408 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R409 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R410 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R411 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R412 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R413 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R414 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R415 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R416 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R417 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R418 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R419 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R420 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R422 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R423 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R424 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R425 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R426 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R427 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R428 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R501 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R502 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R503 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R505 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R507 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R508 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R510 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R511 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R512 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R513 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R514 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R515 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R516 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |

(DTX-5 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R517 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R518 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R519 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R520 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R521 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R522 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R523 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R524 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R525 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R526 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R527 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R528 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R529 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R530 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R531 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R532 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R533 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R536 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R537 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R538 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R539 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R540 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R541 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R542 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R545 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R548 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R549 | 1-208-899-81 | s | RES, CHIP 3.3K (1005) |
| R601 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R602 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R603 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R604 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R606 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R607 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R608 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R609 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R610 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R612 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R613 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R614 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R615 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R616 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R618 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R619 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R621 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R623 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R625 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R627 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R628 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R629 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R630 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R631 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R632 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R633 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R634 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R635 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R636 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R637 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R638 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R639 | 1-208-927-81 | s | RES, CHIP 47K (1005) |

(DTX-5 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R640 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R701 | 1-208-875-81 | s | RES, CHIP 330 (1005) |
| R702 | 1-220-882-81 | s | RES, CHIP 33 (1005) |
| R703 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R704 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R705 | 1-208-891-81 | s | RES, CHIP 1.5K (1005) |
| R706 | 1-208-891-81 | s | RES, CHIP 1.5K (1005) |
| R707 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R708 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R709 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R710 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R711 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R712 | 1-208-891-81 | s | RES, CHIP 1.5K (1005) |
| R713 | 1-208-875-81 | s | RES, CHIP 330 (1005) |
| R714 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R715 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R716 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R717 | 1-208-875-81 | s | RES, CHIP 330 (1005) |
| R718 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R719 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R720 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R721 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R722 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R723 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R724 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R725 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| RB401 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB402 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB403 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB404 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB405 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB406 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB407 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB408 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB409 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB410 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB411 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB412 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB413 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB414 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB415 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB416 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB417 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB418 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB419 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB420 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB421 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB422 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB423 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB424 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB501 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB502 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB503 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB504 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB505 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB601 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB602 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB603 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |

(DTX-5 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| RB604 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB605 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB606 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB607 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB608 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB609 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB610 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB611 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB612 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB613 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB614 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB615 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB616 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB617 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB618 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB619 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB620 | 1-234-375-21 | s | RES, NETWORK 1K (1005X4) |
| RB621 | 1-234-375-21 | s | RES, NETWORK 1K (1005X4) |
| RB622 | 1-234-375-21 | s | RES, NETWORK 1K (1005X4) |
| RB623 | 1-234-375-21 | s | RES, NETWORK 1K (1005X4) |
| RB624 | 1-234-375-21 | s | RES, NETWORK 1K (1005X4) |
| RB625 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB626 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB627 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB628 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB629 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB630 | 1-234-375-21 | s | RES, NETWORK 1K (1005X4) |
| RB631 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB632 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB633 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB634 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RV251 | 1-225-789-21 | s | RES, ADJ, CERMET 2K |
| RV301 | 1-225-788-21 | s | RES, ADJ, CERMET 1K |
| RV701 | 1-225-788-21 | s | RES, ADJ, CERMET 1K |
| S601 | 1-692-271-41 | s | SWITCH, SLIDE |
| S602 | 1-572-658-21 | s | SWITCH, ROTARY |
| S603 | 1-762-118-21 | s | SWITCH, TOGGLE |
| S604 | 1-762-120-21 | s | SWITCH, TOGGLE |
| S605 | 1-762-120-21 | s | SWITCH, TOGGLE |
| THP101 ⚠ | 1-533-817-21 | s | THERMISTOR |
| THP102 ⚠ | 1-533-817-21 | s | THERMISTOR |
| THP103 ⚠ | 1-533-817-21 | s | THERMISTOR |
| THP104 ⚠ | 1-533-817-21 | s | THERMISTOR |
| THP105 ⚠ | 1-533-817-21 | s | THERMISTOR |
| THP106 ⚠ | 1-533-817-21 | s | THERMISTOR |
| TP251 | 1-535-877-22 | s | CHIP, CHECKER |
| TP301 | 1-535-877-22 | s | CHIP, CHECKER |
| TP351 | 1-535-877-22 | s | CHIP, CHECKER |
| TP501 | 1-535-877-22 | s | CHIP, CHECKER |
| TP701 | 1-535-877-22 | s | CHIP, CHECKER |
| X201 | 1-795-872-11 | s | OSCILLATOR |

---

EN-159A BOARD

---

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| 1pc | A-1132-789-A | s | MOUNTED CIRCUIT BOARD, EN-159A |
| 4pcs | 7-682-947-01 | s | SCREW +PSW 3X6 |
| C101 | 1-127-692-91 | s | CAP, CHIP CERAMIC 10MF B 3225 |
| C102 | 1-127-692-91 | s | CAP, CHIP CERAMIC 10MF B 3225 |
| C103 | 1-165-176-91 | s | CAP,CERAMIC 47000PF B 1608 |
| C104 | 1-165-176-91 | s | CAP,CERAMIC 47000PF B 1608 |
| C105 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C106 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C107 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C108 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C109 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C110 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C111 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C112 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C113 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| C114 | 1-128-589-21 | s | CAP, CHIP ELECT 47MF |
| C115 | 1-162-927-91 | s | CAP, CERAMIC 100PF CH 1608 |
| C116 | 1-162-927-91 | s | CAP, CERAMIC 100PF CH 1608 |
| C117 | 1-165-176-91 | s | CAP,CERAMIC 47000PF B 1608 |
| C118 | 1-165-176-91 | s | CAP,CERAMIC 47000PF B 1608 |
| C120 | 1-100-620-91 | s | CAP, CHIP CERAMIC 47MF B(3225) |
| C121 | 1-100-620-91 | s | CAP, CHIP CERAMIC 47MF B(3225) |
| C122 | 1-100-620-91 | s | CAP, CHIP CERAMIC 47MF B(3225) |
| C123 | 1-100-620-91 | s | CAP, CHIP CERAMIC 47MF B(3225) |
| C124 | 1-162-970-91 | s | CAP, CERAMIC 10000PF B 1608 |
| C125 | 1-162-970-91 | s | CAP, CERAMIC 10000PF B 1608 |
| C126 | 1-164-227-91 | s | CAP,CERAMIC 22000PF B 1608 |
| C127 | 1-115-412-91 | s | CAP,CHIP CERAMIC 680PF CH 1608 |
| C128 | 1-164-227-91 | s | CAP,CERAMIC 22000PF B 1608 |
| C129 | 1-115-412-91 | s | CAP,CHIP CERAMIC 680PF CH 1608 |
| C130 | 1-127-692-91 | s | CAP, CHIP CERAMIC 10MF B 3225 |
| C131 | 1-162-927-91 | s | CAP, CERAMIC 100PF CH 1608 |
| C132 | 1-127-692-91 | s | CAP, CHIP CERAMIC 10MF B 3225 |
| C133 | 1-127-692-91 | s | CAP, CHIP CERAMIC 10MF B 3225 |
| C134 | 1-115-416-91 | s | CAP,CHIP CERAMIC1000PF CH 1608 |
| C135 | 1-165-908-91 | s | CAP, CERAMIC 1000000PF B 1608 |
| C136 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C137 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C138 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C139 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C140 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C141 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C142 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C143 | 1-128-589-21 | s | CAP, CHIP ELECT 47MF |
| C144 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C145 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C146 | 1-128-589-21 | s | CAP, CHIP ELECT 47MF |
| C147 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C148 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C149 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| C150 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| C151 | 1-128-589-21 | s | CAP, CHIP ELECT 47MF |
| C152 | 1-128-589-21 | s | CAP, CHIP ELECT 47MF |
| C153 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C155 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C156 | 1-115-340-91 | s | CAP, CERAMIC 0.22MF B (2012) |
| C157 | 1-115-340-91 | s | CAP, CERAMIC 0.22MF B (2012) |
| C158 | 1-126-399-21 | s | CAP, CHIP ELECT 10MF (5X5.7) |

(EN-159A BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C159 | 1-126-399-21 | s | CAP, CHIP ELECT 10MF (5X5.7) |
| C160 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C161 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C162 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C163 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C164 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C165 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C166 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C167 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C201 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C202 | 1-165-908-91 | s | CAP, CERAMIC 1000000PF B 1608 |
| C205 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C231 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C232 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C233 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C234 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C235 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C236 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C237 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C238 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C239 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C240 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C241 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C242 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C243 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C244 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C245 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C246 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C247 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C248 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C249 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C301 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C302 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C303 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C304 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C305 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C306 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C307 | 1-162-923-91 | s | CAP, CERAMIC 47PF CH 1608 |
| C308 | 1-162-915-91 | s | CAP, CERAMIC 10PF CH 1608 |
| C309 | 1-162-919-91 | s | CAP, CERAMIC 22PF CH 1608 |
| C310 | 1-115-416-91 | s | CAP,CHIP CERAMIC1000PF CH 1608 |
| C311 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C312 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C313 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C314 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C315 | 1-127-954-21 | s | CAP, CHIP FILM 0.047MF (3216) |
| C316 | 1-115-416-91 | s | CAP,CHIP CERAMIC1000PF CH 1608 |
| C317 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C318 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C319 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C320 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C321 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C322 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C323 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C324 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C325 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C326 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C328 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C329 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |

(EN-159A BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C330 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C331 | 1-165-872-21 | s | CAP, ELECT 47MF (5.0X6.5) |
| C332 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C333 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C334 | 1-126-396-21 | s | CAP, CHIP ELECT 47MF (6.3X5.7) |
| C335 | 1-127-573-91 | s | CAP, CHIP CERAMIC 1MF B (2012) |
| C336 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C337 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C338 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C339 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C340 | 1-126-396-21 | s | CAP, CHIP ELECT 47MF (6.3X5.7) |
| C341 | 1-127-573-91 | s | CAP, CHIP CERAMIC 1MF B (2012) |
| C342 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C343 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C344 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C345 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C346 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C347 | 1-162-915-91 | s | CAP, CERAMIC 10PF CH 1608 |
| C348 | 1-162-919-91 | s | CAP, CERAMIC 22PF CH 1608 |
| C349 | 1-162-923-91 | s | CAP, CERAMIC 47PF CH 1608 |
| C350 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C351 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C352 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C353 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C354 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C355 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C356 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C357 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C358 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C359 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C360 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C361 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C362 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C363 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C364 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C365 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C366 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C367 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C368 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C369 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C370 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C371 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C372 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C373 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C374 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C375 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C376 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C377 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C378 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C379 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C380 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C381 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C382 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C383 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C384 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C385 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C386 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C387 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C388 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |

(EN-159A BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C389 | 1-162-923-91 | s | CAP, CERAMIC 47PF CH 1608 |
| C390 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C391 | 1-162-923-91 | s | CAP, CERAMIC 47PF CH 1608 |
| C392 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C393 | 1-162-923-91 | s | CAP, CERAMIC 47PF CH 1608 |
| C394 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C395 | 1-162-910-91 | s | CAP, CERAMIC 5.0PF CH 1608 |
| C396 | 1-162-915-91 | s | CAP, CERAMIC 10PF CH 1608 |
| C397 | 1-162-910-91 | s | CAP, CERAMIC 5.0PF CH 1608 |
| C398 | 1-162-915-91 | s | CAP, CERAMIC 10PF CH 1608 |
| C399 | 1-162-910-91 | s | CAP, CERAMIC 5.0PF CH 1608 |
| C400 | 1-162-915-91 | s | CAP, CERAMIC 10PF CH 1608 |
| C401 | 1-162-923-91 | s | CAP, CERAMIC 47PF CH 1608 |
| C402 | 1-162-923-91 | s | CAP, CERAMIC 47PF CH 1608 |
| C403 | 1-162-923-91 | s | CAP, CERAMIC 47PF CH 1608 |
| C404 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C405 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C406 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C407 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C408 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C409 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C410 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C411 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C412 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C413 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C414 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C415 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C416 | 1-162-915-91 | s | CAP, CERAMIC 10PF CH 1608 |
| C417 | 1-162-913-91 | s | CAP, CERAMIC 8.0PF CH 1608 |
| C418 | 1-162-915-91 | s | CAP, CERAMIC 10PF CH 1608 |
| C419 | 1-162-913-91 | s | CAP, CERAMIC 8.0PF CH 1608 |
| C420 | 1-162-915-91 | s | CAP, CERAMIC 10PF CH 1608 |
| C421 | 1-162-913-91 | s | CAP, CERAMIC 8.0PF CH 1608 |
| C501 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C502 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C503 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C504 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C505 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C506 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C507 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C508 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C509 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C510 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C511 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C512 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C513 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C514 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C515 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C516 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C517 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C518 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C524 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C618 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C619 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C620 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C621 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| CN501 | 1-764-093-21 | o | PIN, CONNECTOR (PC BOARD) 8P |

(EN-159A BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| D101 | 8-719-017-03 | s | DIODE 02DZ4.7-TPH3 |
| D102 | 8-719-017-03 | s | DIODE 02DZ4.7-TPH3 |
| D202 | 8-719-064-52 | s | DIODE CL-191YG-CD-T |
| D203 | 8-719-064-52 | s | DIODE CL-191YG-CD-T |
| D301 | 8-719-024-83 | s | DIODE 1SS301-TE85L |
| D302 | 8-719-820-42 | s | DIODE 1SS302-TE85L |
| E101 | 1-535-877-22 | s | CHIP, CHECKER |
| E102 | 1-535-877-22 | s | CHIP, CHECKER |
| E103 | 1-535-877-22 | s | CHIP, CHECKER |
| E104 | 1-535-877-22 | s | CHIP, CHECKER |
| FB101 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB102 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB103 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB104 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB301 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB302 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| IC101 | 8-759-327-01 | s | IC NJM062V(TE2) |
| IC102 | 8-759-327-01 | s | IC NJM062V(TE2) |
| IC104 | 6-701-572-01 | s | IC TPS54610PWPR |
| IC105 | 6-701-572-01 | s | IC TPS54610PWPR |
| IC106 | 6-704-976-01 | s | IC ADR381ARTZ-REEL7 |
| IC107 | 8-759-472-43 | s | IC 74VHC245MTCX |
| IC108 | 8-759-472-43 | s | IC 74VHC245MTCX |
| IC109 | 8-759-472-43 | s | IC 74VHC245MTCX |
| IC110 | 8-752-392-03 | s | IC CXD1095BR |
| IC111 | 8-759-662-38 | s | IC 74VHCT08AMTCX |
| IC112 | 8-759-472-18 | s | IC 74VHC138MTCX |
| IC113 | 6-706-478-01 | s | IC TC7SET08FU(T5RSOJF) |
| IC114 | 8-759-685-34 | s | IC M62352AGP-D60Q |
| IC116 | 6-706-491-01 | s | IC TC7SH86FU(T5RSOYJF) |
| IC117 | 6-706-482-01 | s | IC TC7SH00FU(T5RSOYJF) |
| IC118 | 8-759-338-95 | s | IC NJM2903V(TE2) |
| IC201 | 8-759-675-47 | s | IC SN74LVC04APWR |
| IC202 | 8-759-675-47 | s | IC SN74LVC04APWR |
| IC207 | 8-759-472-65 | s | IC 74VHC574MTCX |
| IC208 | 8-759-472-65 | s | IC 74VHC574MTCX |
| IC209 | 8-759-472-65 | s | IC 74VHC574MTCX |
| IC301 | 8-752-371-56 | s | IC CXD1171M-TH |
| IC302 | 6-700-572-01 | s | IC UPD6466GS-515-E2 |
| IC303 | 6-700-572-01 | s | IC UPD6466GS-515-E2 |
| IC304 | 6-706-484-01 | s | IC TC7SH04FU(T5RSOYJF) |
| IC305 | 8-752-363-45 | s | IC CXD1216M-TH |
| IC306 | 8-759-276-25 | s | IC TLC272CPSR |
| IC307 | 8-752-349-19 | s | IC CXD1176Q-T4 |
| IC308 | 6-706-484-01 | s | IC TC7SH04FU(T5RSOYJF) |
| IC309 | 8-759-472-65 | s | IC 74VHC574MTCX |
| IC310 | 8-759-662-38 | s | IC 74VHCT08AMTCX |
| IC311 | 6-707-556-01 | s | IC CXD9184R |
| IC312 | 8-759-256-45 | s | IC NJM4560M-TE2 |
| IC313 | 8-759-561-46 | s | IC AD8014ARTZ-REEL7 |
| IC314 | 8-752-391-99 | s | IC CXD2315Q-T4 |
| IC315 | 6-706-478-01 | s | IC TC7SET08FU(T5RSOJF) |
| IC316 | 8-752-391-99 | s | IC CXD2315Q-T4 |
| IC317 | 6-706-478-01 | s | IC TC7SET08FU(T5RSOJF) |
| IC318 | 8-752-391-99 | s | IC CXD2315Q-T4 |
| IC319 | 8-759-561-46 | s | IC AD8014ARTZ-REEL7 |
| IC320 | 8-759-561-46 | s | IC AD8014ARTZ-REEL7 |

(EN-159A BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| IC321 | 8-759-561-46 | s | IC AD8014ARTZ-REEL7 |
| IC502 | 6-700-387-01 | s | IC EPC2LC20N-TP |
| IC513 | 8-759-472-65 | s | IC 74VHC574MTCX |
| IC514 | 8-759-472-65 | s | IC 74VHC574MTCX |
| IC515 | 8-759-472-65 | s | IC 74VHC574MTCX |
| L101 | 1-416-344-21 | s | COIL, CHOKE 10UH |
| L102 | 1-416-344-21 | s | COIL, CHOKE 10UH |
| L103 | 1-416-344-21 | s | COIL, CHOKE 10UH |
| L104 | 1-416-344-21 | s | COIL, CHOKE 10UH |
| L105 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L106 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L206 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L207 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L301 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L302 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L303 | 1-412-947-21 | s | INDUCTOR 4.7UH (2520) |
| L304 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L305 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L306 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L307 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L308 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L309 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L310 | 1-412-955-21 | s | INDUCTOR, SMALL TYPE 22UH 2520 |
| L311 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L312 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L313 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L314 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L315 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L316 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L317 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L318 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L319 | 1-412-947-21 | s | INDUCTOR 4.7UH (2520) |
| L320 | 1-412-947-21 | s | INDUCTOR 4.7UH (2520) |
| L321 | 1-412-947-21 | s | INDUCTOR 4.7UH (2520) |
| L322 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L323 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L324 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L325 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L326 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L327 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L501 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L502 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| Q101 | 8-729-209-73 | s | TRANSISTOR 2SA1213Y-TE12L |
| Q102 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q103 | 8-729-209-73 | s | TRANSISTOR 2SA1213Y-TE12L |
| Q104 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q105 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q206 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q207 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| R101 | 1-218-883-91 | s | RES, CHIP 33K (1608) |
| R102 | 1-218-855-91 | s | RES, CHIP 2.2K (1608) |
| R103 | 1-218-875-91 | s | RES, CHIP 15K (1608) |
| R104 | 1-218-875-91 | s | RES, CHIP 15K (1608) |
| R105 | 1-218-879-91 | s | RES, CHIP 22K (1608) |
| R106 | 1-218-855-91 | s | RES, CHIP 2.2K (1608) |
| R107 | 1-218-891-91 | s | RES, CHIP 68K (1608) |
| R108 | 1-218-891-91 | s | RES, CHIP 68K (1608) |
| R109 | 1-218-875-91 | s | RES, CHIP 15K (1608) |

(EN-159A BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R110 | 1-218-883-91 | s | RES, CHIP 33K (1608) |
| R111 | 1-218-831-91 | s | RES, CHIP 220 (1608) |
| R112 | 1-218-871-91 | s | RES, CHIP 10K (1608) |
| R113 | 1-218-855-91 | s | RES, CHIP 2.2K (1608) |
| R114 | 1-218-875-91 | s | RES, CHIP 15K (1608) |
| R115 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R116 | 1-218-831-91 | s | RES, CHIP 220 (1608) |
| R117 | 1-218-831-91 | s | RES, CHIP 220 (1608) |
| R118 | 1-218-831-91 | s | RES, CHIP 220 (1608) |
| R119 | 1-218-847-91 | s | RES, CHIP 1.0K (1608) |
| R120 | 1-218-847-91 | s | RES, CHIP 1.0K (1608) |
| R121 | 1-218-831-91 | s | RES, CHIP 220 (1608) |
| R122 | 1-218-851-91 | s | RES, CHIP 1.5K (1608) |
| R123 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| R124 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R125 | 1-218-851-91 | s | RES, CHIP 1.5K (1608) |
| R126 | 1-218-871-91 | s | RES, CHIP 10K (1608) |
| R127 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R128 | 1-218-871-91 | s | RES, CHIP 10K (1608) |
| R129 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| R130 | 1-218-855-91 | s | RES, CHIP 2.2K (1608) |
| R131 | 1-218-871-91 | s | RES, CHIP 10K (1608) |
| R132 | 1-218-879-91 | s | RES, CHIP 22K (1608) |
| R133 | 1-218-879-91 | s | RES, CHIP 22K (1608) |
| R134 | 1-218-859-91 | s | RES, CHIP 3.3K (1608) |
| R135 | 1-218-871-91 | s | RES, CHIP 10K (1608) |
| R136 | 1-218-879-91 | s | RES, CHIP 22K (1608) |
| R137 | 1-218-887-91 | s | RES, CHIP 47K (1608) |
| R138 | 1-218-879-91 | s | RES, CHIP 22K (1608) |
| R139 | 1-218-879-91 | s | RES, CHIP 22K (1608) |
| R140 | 1-218-871-91 | s | RES, CHIP 10K (1608) |
| R141 | 1-218-855-91 | s | RES, CHIP 2.2K (1608) |
| R142 | 1-218-863-91 | s | RES, CHIP 4.7K (1608) |
| R143 | 1-218-887-91 | s | RES, CHIP 47K (1608) |
| R144 | 1-218-887-91 | s | RES, CHIP 47K (1608) |
| R145 | 1-218-879-91 | s | RES, CHIP 22K (1608) |
| R146 | 1-218-867-91 | s | RES, CHIP 6.8K (1608) |
| R147 | 1-218-883-91 | s | RES, CHIP 33K (1608) |
| R148 | 1-218-831-91 | s | RES, CHIP 220 (1608) |
| R149 | 1-218-831-91 | s | RES, CHIP 220 (1608) |
| R150 | 1-218-831-91 | s | RES, CHIP 220 (1608) |
| R151 | 1-218-831-91 | s | RES, CHIP 220 (1608) |
| R152 | 1-218-831-91 | s | RES, CHIP 220 (1608) |
| R153 | 1-211-969-91 | s | RES, CHIP 10 (1608) |
| R154 | 1-211-969-91 | s | RES, CHIP 10 (1608) |
| R155 | 1-218-871-91 | s | RES, CHIP 10K (1608) |
| R156 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R157 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R158 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R159 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R160 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R161 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R165 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R166 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R168 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R171 | 1-218-871-91 | s | RES, CHIP 10K (1608) |
| R174 | 1-218-895-91 | s | RES, CHIP 100K (1608) |
| R175 | 1-218-895-91 | s | RES, CHIP 100K (1608) |
| R176 | 1-218-847-91 | s | RES, CHIP 1.0K (1608) |

(EN-159A BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R177 | 1-218-847-91 | s | RES, CHIP 1.0K (1608) |
| R204 | 1-211-985-91 | s | RES, CHIP 47 (1608) |
| R206 | 1-218-855-91 | s | RES, CHIP 2.2K (1608) |
| R210 | 1-211-985-91 | s | RES, CHIP 47 (1608) |
| R211 | 1-211-985-91 | s | RES, CHIP 47 (1608) |
| R213 | 1-218-863-91 | s | RES, CHIP 4.7K (1608) |
| R214 | 1-218-863-91 | s | RES, CHIP 4.7K (1608) |
| R221 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R223 | 1-211-985-91 | s | RES, CHIP 47 (1608) |
| R224 | 1-211-985-91 | s | RES, CHIP 47 (1608) |
| R225 | 1-211-985-91 | s | RES, CHIP 47 (1608) |
| R226 | 1-211-985-91 | s | RES, CHIP 47 (1608) |
| R227 | 1-211-985-91 | s | RES, CHIP 47 (1608) |
| R228 | 1-211-985-91 | s | RES, CHIP 47 (1608) |
| R229 | 1-211-985-91 | s | RES, CHIP 47 (1608) |
| R230 | 1-211-985-91 | s | RES, CHIP 47 (1608) |
| R231 | 1-211-985-91 | s | RES, CHIP 47 (1608) |
| R232 | 1-211-985-91 | s | RES, CHIP 47 (1608) |
| R259 | 1-218-863-91 | s | RES, CHIP 4.7K (1608) |
| R260 | 1-211-985-91 | s | RES, CHIP 47 (1608) |
| R261 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R262 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R263 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R264 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R265 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R266 | 1-218-887-91 | s | RES, CHIP 47K (1608) |
| R267 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R268 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R269 | 1-218-887-91 | s | RES, CHIP 47K (1608) |
| R270 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R271 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R272 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R273 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R274 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R275 | 1-218-887-91 | s | RES, CHIP 47K (1608) |
| R276 | 1-218-847-91 | s | RES, CHIP 1.0K (1608) |
| R277 | 1-218-887-91 | s | RES, CHIP 47K (1608) |
| R278 | 1-218-847-91 | s | RES, CHIP 1.0K (1608) |
| R279 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R298 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R301 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R302 | 1-218-839-91 | s | RES, CHIP 470 (1608) |
| R303 | 1-218-855-91 | s | RES, CHIP 2.2K (1608) |
| R305 | 1-218-883-91 | s | RES, CHIP 33K (1608) |
| R306 | 1-218-879-91 | s | RES, CHIP 22K (1608) |
| R307 | 1-218-847-91 | s | RES, CHIP 1.0K (1608) |
| R308 | 1-218-839-91 | s | RES, CHIP 470 (1608) |
| R309 | 1-218-839-91 | s | RES, CHIP 470 (1608) |
| R311 | 1-218-895-91 | s | RES, CHIP 100K (1608) |
| R312 | 1-218-831-91 | s | RES, CHIP 220 (1608) |
| R313 | 1-218-871-91 | s | RES, CHIP 10K (1608) |
| R314 | 1-218-871-91 | s | RES, CHIP 10K (1608) |
| R315 | 1-211-985-91 | s | RES, CHIP 47 (1608) |
| R316 | 1-211-985-91 | s | RES, CHIP 47 (1608) |
| R317 | 1-211-985-91 | s | RES, CHIP 47 (1608) |
| R318 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R319 | 1-211-985-91 | s | RES, CHIP 47 (1608) |
| R320 | 1-218-871-91 | s | RES, CHIP 10K (1608) |
| R321 | 1-218-871-91 | s | RES, CHIP 10K (1608) |

(EN-159A BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R322 | 1-218-847-91 | s | RES, CHIP 1.0K (1608) |
| R323 | 1-218-855-91 | s | RES, CHIP 2.2K (1608) |
| R324 | 1-218-835-91 | s | RES, CHIP 330 (1608) |
| R325 | 1-218-851-91 | s | RES, CHIP 1.5K (1608) |
| R326 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R327 | 1-211-969-91 | s | RES, CHIP 10 (1608) |
| R329 | 1-218-879-91 | s | RES, CHIP 22K (1608) |
| R331 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R332 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R333 | 1-211-985-91 | s | RES, CHIP 47 (1608) |
| R334 | 1-218-871-91 | s | RES, CHIP 10K (1608) |
| R341 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R342 | 1-218-871-91 | s | RES, CHIP 10K (1608) |
| R343 | 1-218-871-91 | s | RES, CHIP 10K (1608) |
| R344 | 1-218-871-91 | s | RES, CHIP 10K (1608) |
| R345 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| R346 | 1-218-871-91 | s | RES, CHIP 10K (1608) |
| R347 | 1-218-863-91 | s | RES, CHIP 4.7K (1608) |
| R348 | 1-218-863-91 | s | RES, CHIP 4.7K (1608) |
| R349 | 1-211-969-91 | s | RES, CHIP 10 (1608) |
| R350 | 1-218-831-91 | s | RES, CHIP 220 (1608) |
| R351 | 1-218-871-91 | s | RES, CHIP 10K (1608) |
| R352 | 1-218-871-91 | s | RES, CHIP 10K (1608) |
| R353 | 1-218-871-91 | s | RES, CHIP 10K (1608) |
| R354 | 1-218-863-91 | s | RES, CHIP 4.7K (1608) |
| R355 | 1-218-847-91 | s | RES, CHIP 1.0K (1608) |
| R356 | 1-218-847-91 | s | RES, CHIP 1.0K (1608) |
| R357 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| R358 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| R360 | 1-218-831-91 | s | RES, CHIP 220 (1608) |
| R361 | 1-218-831-91 | s | RES, CHIP 220 (1608) |
| R362 | 1-218-831-91 | s | RES, CHIP 220 (1608) |
| R363 | 1-218-831-91 | s | RES, CHIP 220 (1608) |
| R364 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R365 | 1-211-985-91 | s | RES, CHIP 47 (1608) |
| R366 | 1-218-855-91 | s | RES, CHIP 2.2K (1608) |
| R367 | 1-218-831-91 | s | RES, CHIP 220 (1608) |
| R368 | 1-218-831-91 | s | RES, CHIP 220 (1608) |
| R369 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R370 | 1-218-831-91 | s | RES, CHIP 220 (1608) |
| R371 | 1-218-831-91 | s | RES, CHIP 220 (1608) |
| R372 | 1-218-831-91 | s | RES, CHIP 220 (1608) |
| R373 | 1-218-847-91 | s | RES, CHIP 1.0K (1608) |
| R375 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| R376 | 1-218-855-91 | s | RES, CHIP 2.2K (1608) |
| R377 | 1-218-851-91 | s | RES, CHIP 1.5K (1608) |
| R378 | 1-211-985-91 | s | RES, CHIP 47 (1608) |
| R379 | 1-218-851-91 | s | RES, CHIP 1.5K (1608) |
| R380 | 1-218-843-91 | s | RES, CHIP 680 (1608) |
| R381 | 1-218-851-91 | s | RES, CHIP 1.5K (1608) |
| R382 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| R383 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| R384 | 1-218-843-91 | s | RES, CHIP 680 (1608) |
| R387 | 1-218-827-91 | s | RES, CHIP 150 (1608) |
| R390 | 1-218-831-91 | s | RES, CHIP 220 (1608) |
| R391 | 1-218-827-91 | s | RES, CHIP 150 (1608) |
| R392 | 1-218-827-91 | s | RES, CHIP 150 (1608) |
| R393 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R394 | 1-218-823-91 | s | RES, CHIP 100 (1608) |

(EN-159A BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R396 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R398 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R400 | 1-218-859-91 | s | RES, CHIP 3.3K (1608) |
| R401 | 1-218-859-91 | s | RES, CHIP 3.3K (1608) |
| R402 | 1-218-859-91 | s | RES, CHIP 3.3K (1608) |
| R403 | 1-218-831-91 | s | RES, CHIP 220 (1608) |
| R404 | 1-218-831-91 | s | RES, CHIP 220 (1608) |
| R405 | 1-218-831-91 | s | RES, CHIP 220 (1608) |
| R406 | 1-218-835-91 | s | RES, CHIP 330 (1608) |
| R407 | 1-218-835-91 | s | RES, CHIP 330 (1608) |
| R408 | 1-218-835-91 | s | RES, CHIP 330 (1608) |
| R409 | 1-218-851-91 | s | RES, CHIP 1.5K (1608) |
| R410 | 1-218-851-91 | s | RES, CHIP 1.5K (1608) |
| R411 | 1-218-855-91 | s | RES, CHIP 2.2K (1608) |
| R412 | 1-218-851-91 | s | RES, CHIP 1.5K (1608) |
| R413 | 1-218-851-91 | s | RES, CHIP 1.5K (1608) |
| R414 | 1-218-855-91 | s | RES, CHIP 2.2K (1608) |
| R415 | 1-218-851-91 | s | RES, CHIP 1.5K (1608) |
| R416 | 1-218-851-91 | s | RES, CHIP 1.5K (1608) |
| R417 | 1-218-855-91 | s | RES, CHIP 2.2K (1608) |
| R418 | 1-218-887-91 | s | RES, CHIP 47K (1608) |
| R419 | 1-218-903-91 | s | RES, CHIP 220K (1608) |
| R420 | 1-218-887-91 | s | RES, CHIP 47K (1608) |
| R421 | 1-218-903-91 | s | RES, CHIP 220K (1608) |
| R422 | 1-218-887-91 | s | RES, CHIP 47K (1608) |
| R423 | 1-218-903-91 | s | RES, CHIP 220K (1608) |
| R424 | 1-218-875-91 | s | RES, CHIP 15K (1608) |
| R425 | 1-218-875-91 | s | RES, CHIP 15K (1608) |
| R426 | 1-218-875-91 | s | RES, CHIP 15K (1608) |
| R427 | 1-218-835-91 | s | RES, CHIP 330 (1608) |
| R428 | 1-218-835-91 | s | RES, CHIP 330 (1608) |
| R429 | 1-218-835-91 | s | RES, CHIP 330 (1608) |
| R430 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R431 | 1-218-851-91 | s | RES, CHIP 1.5K (1608) |
| R432 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R433 | 1-218-851-91 | s | RES, CHIP 1.5K (1608) |
| R434 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R435 | 1-218-851-91 | s | RES, CHIP 1.5K (1608) |
| R436 | 1-218-851-91 | s | RES, CHIP 1.5K (1608) |
| R437 | 1-218-867-91 | s | RES, CHIP 6.8K (1608) |
| R438 | 1-218-843-91 | s | RES, CHIP 680 (1608) |
| R439 | 1-218-851-91 | s | RES, CHIP 1.5K (1608) |
| R440 | 1-218-867-91 | s | RES, CHIP 6.8K (1608) |
| R441 | 1-218-843-91 | s | RES, CHIP 680 (1608) |
| R442 | 1-218-851-91 | s | RES, CHIP 1.5K (1608) |
| R443 | 1-218-867-91 | s | RES, CHIP 6.8K (1608) |
| R444 | 1-218-843-91 | s | RES, CHIP 680 (1608) |
| R445 | 1-211-989-91 | s | RES, CHIP 68 (1608) |
| R446 | 1-211-989-91 | s | RES, CHIP 68 (1608) |
| R447 | 1-211-989-91 | s | RES, CHIP 68 (1608) |
| R448 | 1-218-843-91 | s | RES, CHIP 680 (1608) |
| R449 | 1-218-843-91 | s | RES, CHIP 680 (1608) |
| R450 | 1-218-843-91 | s | RES, CHIP 680 (1608) |
| R451 | 1-218-831-91 | s | RES, CHIP 220 (1608) |
| R452 | 1-218-831-91 | s | RES, CHIP 220 (1608) |
| R453 | 1-218-831-91 | s | RES, CHIP 220 (1608) |
| R454 | 1-218-831-91 | s | RES, CHIP 220 (1608) |
| R455 | 1-218-831-91 | s | RES, CHIP 220 (1608) |
| R456 | 1-218-831-91 | s | RES, CHIP 220 (1608) |

(EN-159A BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R457 | 1-218-831-91 | s | RES, CHIP 220 (1608) |
| R458 | 1-211-969-91 | s | RES, CHIP 10 (1608) |
| R459 | 1-211-969-91 | s | RES, CHIP 10 (1608) |
| R501 | 1-218-871-91 | s | RES, CHIP 10K (1608) |
| R502 | 1-218-871-91 | s | RES, CHIP 10K (1608) |
| R503 | 1-218-847-91 | s | RES, CHIP 1.0K (1608) |
| R504 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R505 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R506 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R507 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R508 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R509 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R510 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R511 | 1-218-871-91 | s | RES, CHIP 10K (1608) |
| R512 | 1-218-871-91 | s | RES, CHIP 10K (1608) |
| R513 | 1-218-871-91 | s | RES, CHIP 10K (1608) |
| R514 | 1-211-985-91 | s | RES, CHIP 47 (1608) |
| R515 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| R516 | 1-218-847-91 | s | RES, CHIP 1.0K (1608) |
| R517 | 1-211-985-91 | s | RES, CHIP 47 (1608) |
| R525 | 1-218-847-91 | s | RES, CHIP 1.0K (1608) |
| R526 | 1-218-847-91 | s | RES, CHIP 1.0K (1608) |
| R527 | 1-218-847-91 | s | RES, CHIP 1.0K (1608) |
| R528 | 1-218-847-91 | s | RES, CHIP 1.0K (1608) |
| R547 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R663 | 1-218-879-91 | s | RES, CHIP 22K (1608) |
| R667 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R668 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R669 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R670 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R671 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R672 | 1-218-887-91 | s | RES, CHIP 47K (1608) |
| R901 | 1-218-895-91 | s | RES, CHIP 100K (1608) |
| R902 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R911 | 1-218-847-91 | s | RES, CHIP 1.0K (1608) |
| R912 | 1-218-847-91 | s | RES, CHIP 1.0K (1608) |
| R913 | 1-218-831-91 | s | RES, CHIP 220 (1608) |
| RB101 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB102 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB103 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB104 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB105 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB106 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB107 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB108 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB109 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB110 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB111 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB112 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB113 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB114 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB115 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB116 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB117 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB118 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB119 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB120 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB121 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |

(EN-159A BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| RB122 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB123 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB124 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB125 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB127 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB128 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB202 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB203 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB204 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB205 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB206 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB207 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB210 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB211 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB212 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB213 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB214 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB215 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB216 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB217 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB218 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB219 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB220 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB221 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB222 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB223 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB224 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB225 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB226 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB227 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB228 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB229 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB230 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB231 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB232 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB233 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB234 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB235 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB236 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB237 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB238 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB239 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB240 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB241 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB242 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB243 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB254 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB255 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB301 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB302 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB303 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB304 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB305 | 1-234-379-21 | s | RES, NETWORK 22K (1005X4) |
| RB306 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB307 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB308 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB309 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB311 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB312 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |

(EN-159A BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| RB313 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB314 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB315 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB316 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB317 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB318 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB319 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB320 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB321 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB322 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB323 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB324 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB325 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB326 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB327 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB328 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB329 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB330 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB331 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB501 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB502 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB503 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB504 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB505 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB506 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB507 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB508 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB529 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB530 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB531 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB532 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB533 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB534 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB539 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB540 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB541 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB542 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB543 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB544 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RV301 | 1-225-793-21 | s | RES, ADJ, CERMET 20K |
| RV302 | 1-225-792-21 | s | RES, ADJ, CERMET 10K |
| RV303 | 1-225-787-21 | s | RES, ADJ, CERMET 500 |
| RV304 | 1-225-787-21 | s | RES, ADJ, CERMET 500 |
| RV305 | 1-225-787-21 | s | RES, ADJ, CERMET 500 |
| S201 | 1-762-120-21 | s | SWITCH, TOGGLE |
| S301 | 1-570-711-33 | s | SWITCH, SLIDE |
| THP101 ⚠ | 1-533-817-21 | s | THERMISTOR |
| THP102 ⚠ | 1-533-817-21 | s | THERMISTOR |
| THP103 ⚠ | 1-533-817-21 | s | THERMISTOR |
| THP104 ⚠ | 1-533-817-21 | s | THERMISTOR |
| THP105 ⚠ | 1-533-817-21 | s | THERMISTOR |
| THP106 ⚠ | 1-803-615-21 | s | THERMISTOR, POSITIVE |
| THP107 ⚠ | 1-803-615-21 | s | THERMISTOR, POSITIVE |
| TP202 | 1-535-877-22 | s | CHIP, CHECKER |
| TP207 | 1-535-877-22 | s | CHIP, CHECKER |
| TP301 | 1-535-877-22 | s | CHIP, CHECKER |
| TP302 | 1-535-877-22 | s | CHIP, CHECKER |
| TP303 | 1-535-877-22 | s | CHIP, CHECKER |

(EN-159A BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| TP304 | 1-535-877-22 | s | CHIP, CHECKER |
| TP305 | 1-535-877-22 | s | CHIP, CHECKER |
| TP306 | 1-535-877-22 | s | CHIP, CHECKER |
| TP307 | 1-535-877-22 | s | CHIP, CHECKER |

---

EN-159B BOARD

---

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| 1pc | A-1132-790-A | s | MOUNTED CIRCUIT BOARD, EN-159B |
| 4pcs | 7-682-947-01 | s | SCREW +PSW 3X6 |
| C101 | 1-127-692-91 | s | CAP, CHIP CERAMIC 10MF B 3225 |
| C102 | 1-127-692-91 | s | CAP, CHIP CERAMIC 10MF B 3225 |
| C103 | 1-165-176-91 | s | CAP,CERAMIC 47000PF B 1608 |
| C104 | 1-165-176-91 | s | CAP,CERAMIC 47000PF B 1608 |
| C105 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C106 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C107 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C108 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C109 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C110 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C111 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C112 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C113 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| C114 | 1-128-589-21 | s | CAP, CHIP ELECT 47MF |
| C115 | 1-162-927-91 | s | CAP, CERAMIC 100PF CH 1608 |
| C116 | 1-162-927-91 | s | CAP, CERAMIC 100PF CH 1608 |
| C117 | 1-165-176-91 | s | CAP,CERAMIC 47000PF B 1608 |
| C118 | 1-165-176-91 | s | CAP,CERAMIC 47000PF B 1608 |
| C120 | 1-100-620-91 | s | CAP, CHIP CERAMIC 47MF B(3225) |
| C121 | 1-100-620-91 | s | CAP, CHIP CERAMIC 47MF B(3225) |
| C122 | 1-100-620-91 | s | CAP, CHIP CERAMIC 47MF B(3225) |
| C123 | 1-100-620-91 | s | CAP, CHIP CERAMIC 47MF B(3225) |
| C124 | 1-162-970-91 | s | CAP, CERAMIC 10000PF B 1608 |
| C125 | 1-162-970-91 | s | CAP, CERAMIC 10000PF B 1608 |
| C126 | 1-164-227-91 | s | CAP,CERAMIC 22000PF B 1608 |
| C127 | 1-115-412-91 | s | CAP,CHIP CERAMIC 680PF CH 1608 |
| C128 | 1-164-227-91 | s | CAP,CERAMIC 22000PF B 1608 |
| C129 | 1-115-412-91 | s | CAP,CHIP CERAMIC 680PF CH 1608 |
| C130 | 1-127-692-91 | s | CAP, CHIP CERAMIC 10MF B 3225 |
| C131 | 1-162-927-91 | s | CAP, CERAMIC 100PF CH 1608 |
| C132 | 1-127-692-91 | s | CAP, CHIP CERAMIC 10MF B 3225 |
| C133 | 1-127-692-91 | s | CAP, CHIP CERAMIC 10MF B 3225 |
| C134 | 1-115-416-91 | s | CAP,CHIP CERAMIC1000PF CH 1608 |
| C135 | 1-165-908-91 | s | CAP, CERAMIC 1000000PF B 1608 |
| C136 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C137 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C138 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C139 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C140 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C141 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C142 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C143 | 1-128-589-21 | s | CAP, CHIP ELECT 47MF |
| C144 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C145 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C146 | 1-128-589-21 | s | CAP, CHIP ELECT 47MF |
| C147 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C148 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C149 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| C150 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| C151 | 1-128-589-21 | s | CAP, CHIP ELECT 47MF |
| C152 | 1-128-589-21 | s | CAP, CHIP ELECT 47MF |
| C153 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C155 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C156 | 1-115-340-91 | s | CAP, CERAMIC 0.22MF B (2012) |
| C157 | 1-115-340-91 | s | CAP, CERAMIC 0.22MF B (2012) |
| C158 | 1-126-399-21 | s | CAP, CHIP ELECT 10MF (5X5.7) |

(EN-159B BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C159 | 1-126-399-21 | s | CAP, CHIP ELECT 10MF (5X5.7) |
| C160 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C161 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C162 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C163 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C164 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C165 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C166 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C167 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C201 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C202 | 1-165-908-91 | s | CAP, CERAMIC 1000000PF B 1608 |
| C203 | 1-126-391-21 | s | CAP, CHIP ELECT 47MF (5X5.7) |
| C204 | 1-126-391-21 | s | CAP, CHIP ELECT 47MF (5X5.7) |
| C205 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C206 | 1-162-923-91 | s | CAP, CERAMIC 47PF CH 1608 |
| C207 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C208 | 1-162-915-91 | s | CAP, CERAMIC 10PF CH 1608 |
| C209 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C210 | 1-162-919-91 | s | CAP, CERAMIC 22PF CH 1608 |
| C211 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C212 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C213 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C214 | 1-162-910-91 | s | CAP, CERAMIC 5.0PF CH 1608 |
| C215 | 1-126-390-21 | s | CAP, CHIP ELECT 22MF (4X5.7) |
| C216 | 1-126-390-21 | s | CAP, CHIP ELECT 22MF (4X5.7) |
| C217 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C218 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C219 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C220 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C221 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| C222 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C223 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| C224 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| C225 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C226 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| C227 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| C228 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| C229 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| C230 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C231 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C232 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C233 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C234 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C235 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C236 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C237 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C238 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C239 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C240 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C241 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C242 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C243 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C244 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C245 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C246 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C247 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C248 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C249 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C250 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |

(EN-159B BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C251 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C252 | 1-165-872-21 | s | CAP, ELECT 47MF (5.0X6.5) |
| C253 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C254 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C255 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C256 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C257 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C258 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C259 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C260 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C261 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C262 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C263 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C264 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C265 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C266 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C267 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C268 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C301 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C302 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C303 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C304 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C305 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C306 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C307 | 1-162-923-91 | s | CAP, CERAMIC 47PF CH 1608 |
| C308 | 1-162-915-91 | s | CAP, CERAMIC 10PF CH 1608 |
| C309 | 1-162-919-91 | s | CAP, CERAMIC 22PF CH 1608 |
| C310 | 1-115-416-91 | s | CAP,CHIP CERAMIC1000PF CH 1608 |
| C311 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C312 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C313 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C314 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C315 | 1-127-954-21 | s | CAP, CHIP FILM 0.047MF (3216) |
| C316 | 1-115-416-91 | s | CAP,CHIP CERAMIC1000PF CH 1608 |
| C317 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C318 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C319 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C320 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C321 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C322 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C323 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C324 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C325 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C326 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C328 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C329 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C330 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C331 | 1-165-872-21 | s | CAP, ELECT 47MF (5.0X6.5) |
| C332 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C333 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C334 | 1-126-396-21 | s | CAP, CHIP ELECT 47MF (6.3X5.7) |
| C335 | 1-127-573-91 | s | CAP, CHIP CERAMIC 1MF B (2012) |
| C336 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C337 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C338 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C339 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C340 | 1-126-396-21 | s | CAP, CHIP ELECT 47MF (6.3X5.7) |
| C341 | 1-127-573-91 | s | CAP, CHIP CERAMIC 1MF B (2012) |
| C342 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |

(EN-159B BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C343 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C344 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C345 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C346 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C347 | 1-162-915-91 | s | CAP, CERAMIC 10PF CH 1608 |
| C348 | 1-162-919-91 | s | CAP, CERAMIC 22PF CH 1608 |
| C349 | 1-162-923-91 | s | CAP, CERAMIC 47PF CH 1608 |
| C350 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C351 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C352 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C353 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C354 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C355 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C356 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C357 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C358 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C359 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C360 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C361 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C362 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C363 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C364 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C365 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C366 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C367 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C368 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C369 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C370 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C371 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C372 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C373 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C374 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C375 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C376 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C377 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C378 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C379 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C380 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C381 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C382 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C383 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C384 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C385 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C386 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C387 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C388 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C389 | 1-162-923-91 | s | CAP, CERAMIC 47PF CH 1608 |
| C390 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C391 | 1-162-923-91 | s | CAP, CERAMIC 47PF CH 1608 |
| C392 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C393 | 1-162-923-91 | s | CAP, CERAMIC 47PF CH 1608 |
| C394 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C395 | 1-162-910-91 | s | CAP, CERAMIC 5.0PF CH 1608 |
| C396 | 1-162-915-91 | s | CAP, CERAMIC 10PF CH 1608 |
| C397 | 1-162-910-91 | s | CAP, CERAMIC 5.0PF CH 1608 |
| C398 | 1-162-915-91 | s | CAP, CERAMIC 10PF CH 1608 |
| C399 | 1-162-910-91 | s | CAP, CERAMIC 5.0PF CH 1608 |
| C400 | 1-162-915-91 | s | CAP, CERAMIC 10PF CH 1608 |
| C401 | 1-162-923-91 | s | CAP, CERAMIC 47PF CH 1608 |

(EN-159B BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C402 | 1-162-923-91 | s | CAP, CERAMIC 47PF CH 1608 |
| C403 | 1-162-923-91 | s | CAP, CERAMIC 47PF CH 1608 |
| C404 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C405 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C406 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C407 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C408 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C409 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C410 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C411 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C412 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C413 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C414 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C415 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C416 | 1-162-915-91 | s | CAP, CERAMIC 10PF CH 1608 |
| C417 | 1-162-913-91 | s | CAP, CERAMIC 8.0PF CH 1608 |
| C418 | 1-162-915-91 | s | CAP, CERAMIC 10PF CH 1608 |
| C419 | 1-162-913-91 | s | CAP, CERAMIC 8.0PF CH 1608 |
| C420 | 1-162-915-91 | s | CAP, CERAMIC 10PF CH 1608 |
| C421 | 1-162-913-91 | s | CAP, CERAMIC 8.0PF CH 1608 |
| C501 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C502 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C503 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C504 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C505 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C506 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C507 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C508 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C509 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C510 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C511 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C512 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C513 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C514 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C515 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C516 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C517 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C518 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C519 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C520 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C521 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C522 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C523 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C524 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C525 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C526 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C527 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C528 | 1-162-923-91 | s | CAP, CERAMIC 47PF CH 1608 |
| C529 | 1-162-923-91 | s | CAP, CERAMIC 47PF CH 1608 |
| C530 | 1-162-923-91 | s | CAP, CERAMIC 47PF CH 1608 |
| C531 | 1-162-912-91 | s | CAP, CERAMIC 7.0PF CH 1608 |
| C532 | 1-162-919-91 | s | CAP, CERAMIC 22PF CH 1608 |
| C533 | 1-162-912-91 | s | CAP, CERAMIC 7.0PF CH 1608 |
| C534 | 1-162-919-91 | s | CAP, CERAMIC 22PF CH 1608 |
| C535 | 1-162-912-91 | s | CAP, CERAMIC 7.0PF CH 1608 |
| C536 | 1-162-919-91 | s | CAP, CERAMIC 22PF CH 1608 |
| C537 | 1-162-923-91 | s | CAP, CERAMIC 47PF CH 1608 |
| C538 | 1-162-923-91 | s | CAP, CERAMIC 47PF CH 1608 |
| C539 | 1-162-923-91 | s | CAP, CERAMIC 47PF CH 1608 |

(EN-159B BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C540 | 1-162-919-91 | s | CAP, CERAMIC 22PF CH 1608 |
| C541 | 1-162-919-91 | s | CAP, CERAMIC 22PF CH 1608 |
| C542 | 1-162-919-91 | s | CAP, CERAMIC 22PF CH 1608 |
| C543 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C544 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C545 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C546 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C547 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C548 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C549 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C550 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C551 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C552 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C553 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C554 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C555 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C556 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C557 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C558 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C559 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C560 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C561 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C562 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C563 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C564 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C565 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C566 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C567 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C568 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C569 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C570 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C571 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C572 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C573 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C574 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C575 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C576 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C577 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C578 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C579 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C580 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C581 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C582 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C583 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C584 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C585 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C586 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C587 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C588 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C589 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C590 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C591 | 1-162-923-91 | s | CAP, CERAMIC 47PF CH 1608 |
| C592 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C593 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C594 | 1-162-915-91 | s | CAP, CERAMIC 10PF CH 1608 |
| C595 | 1-162-919-91 | s | CAP, CERAMIC 22PF CH 1608 |
| C596 | 1-162-923-91 | s | CAP, CERAMIC 47PF CH 1608 |
| C597 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C598 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |

(EN-159B BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C599 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C600 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C601 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C602 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C603 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C604 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C605 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C606 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C607 | 1-162-915-91 | s | CAP, CERAMIC 10PF CH 1608 |
| C608 | 1-162-915-91 | s | CAP, CERAMIC 10PF CH 1608 |
| C609 | 1-162-915-91 | s | CAP, CERAMIC 10PF CH 1608 |
| C610 | 1-162-915-91 | s | CAP, CERAMIC 10PF CH 1608 |
| C611 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C612 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C613 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C614 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C615 | 1-162-915-91 | s | CAP, CERAMIC 10PF CH 1608 |
| C616 | 1-162-910-91 | s | CAP, CERAMIC 5.0PF CH 1608 |
| C617 | 1-162-915-91 | s | CAP, CERAMIC 10PF CH 1608 |
| C618 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C619 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C620 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| CN501 | 1-764-093-21 | o | PIN, CONNECTOR (PC BOARD) 8P |
| D101 | 8-719-017-03 | s | DIODE 02DZ4.7-TPH3 |
| D102 | 8-719-017-03 | s | DIODE 02DZ4.7-TPH3 |
| D201 | 8-719-024-71 | s | DIODE 1SS362-TE85L |
| D202 | 8-719-064-52 | s | DIODE CL-191YG-CD-T |
| D203 | 8-719-064-52 | s | DIODE CL-191YG-CD-T |
| D204 | 8-719-074-31 | s | DIODE CL-196YG-CD-T |
| D205 | 8-719-077-09 | s | DIODE CL-196HR-CD-T |
| D301 | 8-719-024-83 | s | DIODE 1SS301-TE85L |
| D302 | 8-719-820-42 | s | DIODE 1SS302-TE85L |
| D501 | 8-719-024-83 | s | DIODE 1SS301-TE85L |
| D502 | 8-719-820-42 | s | DIODE 1SS302-TE85L |
| D503 | 8-719-820-42 | s | DIODE 1SS302-TE85L |
| D504 | 8-719-820-42 | s | DIODE 1SS302-TE85L |
| E101 | 1-535-877-22 | s | CHIP, CHECKER |
| E102 | 1-535-877-22 | s | CHIP, CHECKER |
| E103 | 1-535-877-22 | s | CHIP, CHECKER |
| E104 | 1-535-877-22 | s | CHIP, CHECKER |
| FB101 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB102 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB103 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB104 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB301 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB302 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FL501 | 1-813-437-11 | s | FILTER, LOW PASS (10MHZ) |
| FL502 | 1-813-437-11 | s | FILTER, LOW PASS (10MHZ) |
| FL503 | 1-813-437-11 | s | FILTER, LOW PASS (10MHZ) |
| IC101 | 8-759-327-01 | s | IC NJM062V(TE2) |
| IC102 | 8-759-327-01 | s | IC NJM062V(TE2) |
| IC104 | 6-701-572-01 | s | IC TPS54610PWPR |
| IC105 | 6-701-572-01 | s | IC TPS54610PWPR |
| IC106 | 6-704-976-01 | s | IC ADR381ARTZ-REEL7 |
| IC107 | 8-759-472-43 | s | IC 74VHC245MTCX |
| IC108 | 8-759-472-43 | s | IC 74VHC245MTCX |

(EN-159B BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| IC109 | 8-759-472-43 | s | IC 74VHC245MTCX |
| IC110 | 8-752-392-03 | s | IC CXD1095BR |
| IC111 | 8-759-662-38 | s | IC 74VHCT08AMTCX |
| IC112 | 8-759-472-18 | s | IC 74VHC138MTCX |
| IC113 | 6-706-478-01 | s | IC TC7SET08FU(T5RSOJF) |
| IC114 | 8-759-685-34 | s | IC M62352AGP-D60Q |
| IC116 | 6-706-491-01 | s | IC TC7SH86FU(T5RSOYJF) |
| IC117 | 6-706-482-01 | s | IC TC7SH00FU(T5RSOYJF) |
| IC118 | 8-759-338-95 | s | IC NJM2903V(TE2) |
| IC201 | 8-759-675-47 | s | IC SN74LVC04APWR |
| IC202 | 8-759-675-47 | s | IC SN74LVC04APWR |
| IC203 | 8-759-561-46 | s | IC AD8014ARTZ-REEL7 |
| IC204 | 8-759-184-65 | s | IC TC4W66FU(TE12R) |
| IC205 | 8-759-344-12 | s | IC GS4981CTAE3 |
| IC206 | 8-759-472-43 | s | IC 74VHC245MTCX |
| IC207 | 8-759-472-65 | s | IC 74VHC574MTCX |
| IC208 | 8-759-472-65 | s | IC 74VHC574MTCX |
| IC209 | 8-759-472-65 | s | IC 74VHC574MTCX |
| IC211 | 6-707-557-01 | s | IC CXD9186R |
| IC212 | 8-759-327-01 | s | IC NJM062V(TE2) |
| IC213 | 8-759-472-14 | s | IC 74VHC125MTCX |
| IC301 | 8-752-371-56 | s | IC CXD1171M-TH |
| IC302 | 6-700-572-01 | s | IC UPD6466GS-515-E2 |
| IC303 | 6-700-572-01 | s | IC UPD6466GS-515-E2 |
| IC304 | 6-706-484-01 | s | IC TC7SH04FU(T5RSOYJF) |
| IC305 | 8-752-363-45 | s | IC CXD1216M-TH |
| IC306 | 8-759-276-25 | s | IC TLC272CPSR |
| IC307 | 8-752-349-19 | s | IC CXD1176Q-T4 |
| IC308 | 6-706-484-01 | s | IC TC7SH04FU(T5RSOYJF) |
| IC309 | 8-759-472-65 | s | IC 74VHC574MTCX |
| IC310 | 8-759-662-38 | s | IC 74VHCT08AMTCX |
| IC311 | 6-707-556-01 | s | IC CXD9184R |
| IC312 | 8-759-256-45 | s | IC NJM4560M-TE2 |
| IC313 | 8-759-561-46 | s | IC AD8014ARTZ-REEL7 |
| IC314 | 8-752-391-99 | s | IC CXD2315Q-T4 |
| IC315 | 6-706-478-01 | s | IC TC7SET08FU(T5RSOJF) |
| IC316 | 8-752-391-99 | s | IC CXD2315Q-T4 |
| IC317 | 6-706-478-01 | s | IC TC7SET08FU(T5RSOJF) |
| IC318 | 8-752-391-99 | s | IC CXD2315Q-T4 |
| IC319 | 8-759-561-46 | s | IC AD8014ARTZ-REEL7 |
| IC320 | 8-759-561-46 | s | IC AD8014ARTZ-REEL7 |
| IC321 | 8-759-561-46 | s | IC AD8014ARTZ-REEL7 |
| IC502 | 6-700-387-01 | s | IC EPC2LC20N-TP |
| IC503 | 8-752-414-92 | s | IC CXD2309AQ-T6 |
| IC505 | 8-752-391-99 | s | IC CXD2315Q-T4 |
| IC506 | 8-752-391-99 | s | IC CXD2315Q-T4 |
| IC507 | 8-752-391-99 | s | IC CXD2315Q-T4 |
| IC508 | 6-706-478-01 | s | IC TC7SET08FU(T5RSOJF) |
| IC509 | 6-706-478-01 | s | IC TC7SET08FU(T5RSOJF) |
| IC510 | 8-759-561-46 | s | IC AD8014ARTZ-REEL7 |
| IC511 | 8-759-561-46 | s | IC AD8014ARTZ-REEL7 |
| IC512 | 8-759-561-46 | s | IC AD8014ARTZ-REEL7 |
| IC516 | 8-759-523-02 | s | IC TC74HC4053AFT(EL) |
| IC517 | 8-759-523-02 | s | IC TC74HC4053AFT(EL) |
| IC518 | 8-759-662-38 | s | IC 74VHCT08AMTCX |
| IC519 | 8-759-662-37 | s | IC 74VHCT00AMTCX |
| L101 | 1-416-344-21 | s | COIL, CHOKE 10UH |
| L102 | 1-416-344-21 | s | COIL, CHOKE 10UH |

(EN-159B BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| L103 | 1-416-344-21 | s | COIL, CHOKE 10UH |
| L104 | 1-416-344-21 | s | COIL, CHOKE 10UH |
| L105 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L106 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L201 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L202 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L203 | 1-412-947-21 | s | INDUCTOR 4.7UH (2520) |
| L204 | 1-414-400-41 | s | INDUCTOR (SMD) 22.0UH |
| L205 | 1-414-400-41 | s | INDUCTOR (SMD) 22.0UH |
| L206 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L207 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L208 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L209 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L301 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L302 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L303 | 1-412-947-21 | s | INDUCTOR 4.7UH (2520) |
| L304 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L305 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L306 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L307 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L308 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L309 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L310 | 1-412-955-21 | s | INDUCTOR, SMALL TYPE 22UH 2520 |
| L311 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L312 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L313 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L314 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L315 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L316 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L317 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L318 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L319 | 1-412-947-21 | s | INDUCTOR 4.7UH (2520) |
| L320 | 1-412-947-21 | s | INDUCTOR 4.7UH (2520) |
| L321 | 1-412-947-21 | s | INDUCTOR 4.7UH (2520) |
| L322 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L323 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L324 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L325 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L326 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L327 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L501 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L502 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L503 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L504 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L505 | 1-412-947-21 | s | INDUCTOR 4.7UH (2520) |
| L506 | 1-412-947-21 | s | INDUCTOR 4.7UH (2520) |
| L507 | 1-412-947-21 | s | INDUCTOR 4.7UH (2520) |
| L508 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L509 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L510 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L511 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L512 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L513 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L514 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L515 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L516 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L517 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L518 | 1-412-955-21 | s | INDUCTOR, SMALL TYPE 22UH 2520 |
| L519 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |

(EN-159B BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| L520 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L521 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L522 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L523 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L524 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| Q101 | 8-729-209-73 | s | TRANSISTOR 2SA1213Y-TE12L |
| Q102 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q103 | 8-729-209-73 | s | TRANSISTOR 2SA1213Y-TE12L |
| Q104 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q105 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q201 | 8-729-928-25 | s | TRANSISTOR 2SA1774TL-QR |
| Q202 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q203 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q204 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q205 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q206 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q207 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q208 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q209 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q501 | 8-729-144-81 | s | TRANSISTOR 2SC4176T1B33B34B35 |
| Q502 | 8-729-144-81 | s | TRANSISTOR 2SC4176T1B33B34B35 |
| Q503 | 8-729-144-81 | s | TRANSISTOR 2SC4176T1B33B34B35 |
| Q504 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q505 | 8-729-928-25 | s | TRANSISTOR 2SA1774TL-QR |
| R101 | 1-218-883-91 | s | RES, CHIP 33K (1608) |
| R102 | 1-218-855-91 | s | RES, CHIP 2.2K (1608) |
| R103 | 1-218-875-91 | s | RES, CHIP 15K (1608) |
| R104 | 1-218-875-91 | s | RES, CHIP 15K (1608) |
| R105 | 1-218-879-91 | s | RES, CHIP 22K (1608) |
| R106 | 1-218-855-91 | s | RES, CHIP 2.2K (1608) |
| R107 | 1-218-891-91 | s | RES, CHIP 68K (1608) |
| R108 | 1-218-891-91 | s | RES, CHIP 68K (1608) |
| R109 | 1-218-875-91 | s | RES, CHIP 15K (1608) |
| R110 | 1-218-883-91 | s | RES, CHIP 33K (1608) |
| R111 | 1-218-831-91 | s | RES, CHIP 220 (1608) |
| R112 | 1-218-871-91 | s | RES, CHIP 10K (1608) |
| R113 | 1-218-855-91 | s | RES, CHIP 2.2K (1608) |
| R114 | 1-218-875-91 | s | RES, CHIP 15K (1608) |
| R115 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R116 | 1-218-831-91 | s | RES, CHIP 220 (1608) |
| R117 | 1-218-831-91 | s | RES, CHIP 220 (1608) |
| R118 | 1-218-831-91 | s | RES, CHIP 220 (1608) |
| R119 | 1-218-847-91 | s | RES, CHIP 1.0K (1608) |
| R120 | 1-218-847-91 | s | RES, CHIP 1.0K (1608) |
| R121 | 1-218-831-91 | s | RES, CHIP 220 (1608) |
| R122 | 1-218-851-91 | s | RES, CHIP 1.5K (1608) |
| R123 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| R124 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R125 | 1-218-851-91 | s | RES, CHIP 1.5K (1608) |
| R126 | 1-218-871-91 | s | RES, CHIP 10K (1608) |
| R127 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R128 | 1-218-871-91 | s | RES, CHIP 10K (1608) |
| R129 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| R130 | 1-218-855-91 | s | RES, CHIP 2.2K (1608) |
| R131 | 1-218-871-91 | s | RES, CHIP 10K (1608) |
| R132 | 1-218-879-91 | s | RES, CHIP 22K (1608) |
| R133 | 1-218-879-91 | s | RES, CHIP 22K (1608) |
| R134 | 1-218-859-91 | s | RES, CHIP 3.3K (1608) |
| R135 | 1-218-871-91 | s | RES, CHIP 10K (1608) |

(EN-159B BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R136 | 1-218-879-91 | s | RES, CHIP 22K (1608) |
| R137 | 1-218-887-91 | s | RES, CHIP 47K (1608) |
| R138 | 1-218-879-91 | s | RES, CHIP 22K (1608) |
| R139 | 1-218-879-91 | s | RES, CHIP 22K (1608) |
| R140 | 1-218-871-91 | s | RES, CHIP 10K (1608) |
| R141 | 1-218-855-91 | s | RES, CHIP 2.2K (1608) |
| R142 | 1-218-863-91 | s | RES, CHIP 4.7K (1608) |
| R143 | 1-218-887-91 | s | RES, CHIP 47K (1608) |
| R144 | 1-218-887-91 | s | RES, CHIP 47K (1608) |
| R145 | 1-218-879-91 | s | RES, CHIP 22K (1608) |
| R146 | 1-218-867-91 | s | RES, CHIP 6.8K (1608) |
| R147 | 1-218-883-91 | s | RES, CHIP 33K (1608) |
| R148 | 1-218-831-91 | s | RES, CHIP 220 (1608) |
| R149 | 1-218-831-91 | s | RES, CHIP 220 (1608) |
| R150 | 1-218-831-91 | s | RES, CHIP 220 (1608) |
| R151 | 1-218-831-91 | s | RES, CHIP 220 (1608) |
| R152 | 1-218-831-91 | s | RES, CHIP 220 (1608) |
| R153 | 1-211-969-91 | s | RES, CHIP 10 (1608) |
| R154 | 1-211-969-91 | s | RES, CHIP 10 (1608) |
| R155 | 1-218-871-91 | s | RES, CHIP 10K (1608) |
| R156 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R157 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R158 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R159 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R160 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R161 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R165 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R166 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R168 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R171 | 1-218-871-91 | s | RES, CHIP 10K (1608) |
| R174 | 1-218-895-91 | s | RES, CHIP 100K (1608) |
| R175 | 1-218-895-91 | s | RES, CHIP 100K (1608) |
| R176 | 1-218-847-91 | s | RES, CHIP 1.0K (1608) |
| R177 | 1-218-847-91 | s | RES, CHIP 1.0K (1608) |
| R201 | 1-218-835-91 | s | RES, CHIP 330 (1608) |
| R202 | 1-218-839-91 | s | RES, CHIP 470 (1608) |
| R203 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R204 | 1-211-985-91 | s | RES, CHIP 47 (1608) |
| R205 | 1-218-855-91 | s | RES, CHIP 2.2K (1608) |
| R206 | 1-218-855-91 | s | RES, CHIP 2.2K (1608) |
| R207 | 1-218-859-91 | s | RES, CHIP 3.3K (1608) |
| R208 | 1-218-859-91 | s | RES, CHIP 3.3K (1608) |
| R209 | 1-218-887-91 | s | RES, CHIP 47K (1608) |
| R210 | 1-211-985-91 | s | RES, CHIP 47 (1608) |
| R211 | 1-211-985-91 | s | RES, CHIP 47 (1608) |
| R212 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R213 | 1-218-863-91 | s | RES, CHIP 4.7K (1608) |
| R214 | 1-218-863-91 | s | RES, CHIP 4.7K (1608) |
| R215 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R216 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R217 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R218 | 1-218-871-91 | s | RES, CHIP 10K (1608) |
| R219 | 1-218-863-91 | s | RES, CHIP 4.7K (1608) |
| R220 | 1-218-847-91 | s | RES, CHIP 1.0K (1608) |
| R221 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R222 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R223 | 1-211-985-91 | s | RES, CHIP 47 (1608) |
| R224 | 1-211-985-91 | s | RES, CHIP 47 (1608) |
| R225 | 1-211-985-91 | s | RES, CHIP 47 (1608) |

(EN-159B BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R226 | 1-211-985-91 | s | RES, CHIP 47 (1608) |
| R227 | 1-211-985-91 | s | RES, CHIP 47 (1608) |
| R228 | 1-211-985-91 | s | RES, CHIP 47 (1608) |
| R229 | 1-211-985-91 | s | RES, CHIP 47 (1608) |
| R230 | 1-211-985-91 | s | RES, CHIP 47 (1608) |
| R231 | 1-211-985-91 | s | RES, CHIP 47 (1608) |
| R232 | 1-211-985-91 | s | RES, CHIP 47 (1608) |
| R233 | 1-218-919-91 | s | RES, CHIP 1M (1608) |
| R234 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R235 | 1-218-907-91 | s | RES, CHIP 330K (1608) |
| R236 | 1-218-871-91 | s | RES, CHIP 10K (1608) |
| R237 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R238 | 1-218-871-91 | s | RES, CHIP 10K (1608) |
| R239 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R240 | 1-218-907-91 | s | RES, CHIP 330K (1608) |
| R241 | 1-218-879-91 | s | RES, CHIP 22K (1608) |
| R242 | 1-218-899-91 | s | RES, CHIP 150K (1608) |
| R243 | 1-218-895-91 | s | RES, CHIP 100K (1608) |
| R244 | 1-218-879-91 | s | RES, CHIP 22K (1608) |
| R245 | 1-218-879-91 | s | RES, CHIP 22K (1608) |
| R246 | 1-218-855-91 | s | RES, CHIP 2.2K (1608) |
| R247 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| R248 | 1-218-879-91 | s | RES, CHIP 22K (1608) |
| R249 | 1-218-859-91 | s | RES, CHIP 3.3K (1608) |
| R250 | 1-218-915-91 | s | RES, CHIP 680K (1608) |
| R251 | 1-218-911-91 | s | RES, CHIP 470K (1608) |
| R252 | 1-218-915-91 | s | RES, CHIP 680K (1608) |
| R253 | 1-218-871-91 | s | RES, CHIP 10K (1608) |
| R254 | 1-218-843-91 | s | RES, CHIP 680 (1608) |
| R255 | 1-218-871-91 | s | RES, CHIP 10K (1608) |
| R256 | 1-218-871-91 | s | RES, CHIP 10K (1608) |
| R257 | 1-218-871-91 | s | RES, CHIP 10K (1608) |
| R258 | 1-218-895-91 | s | RES, CHIP 100K (1608) |
| R259 | 1-218-863-91 | s | RES, CHIP 4.7K (1608) |
| R260 | 1-211-985-91 | s | RES, CHIP 47 (1608) |
| R261 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R262 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R263 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R264 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R265 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R266 | 1-218-887-91 | s | RES, CHIP 47K (1608) |
| R267 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R268 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R269 | 1-218-887-91 | s | RES, CHIP 47K (1608) |
| R271 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R272 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R273 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R274 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R275 | 1-218-887-91 | s | RES, CHIP 47K (1608) |
| R276 | 1-218-847-91 | s | RES, CHIP 1.0K (1608) |
| R277 | 1-218-887-91 | s | RES, CHIP 47K (1608) |
| R278 | 1-218-847-91 | s | RES, CHIP 1.0K (1608) |
| R279 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R280 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R281 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R282 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R283 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R284 | 1-218-831-91 | s | RES, CHIP 220 (1608) |
| R285 | 1-218-871-91 | s | RES, CHIP 10K (1608) |

(EN-159B BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R286 | 1-211-969-91 | s | RES, CHIP 10 (1608) |
| R287 | 1-218-871-91 | s | RES, CHIP 10K (1608) |
| R288 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R289 | 1-218-871-91 | s | RES, CHIP 10K (1608) |
| R290 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R291 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R292 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R293 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R294 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R295 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R296 | 1-218-871-91 | s | RES, CHIP 10K (1608) |
| R297 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R298 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R299 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R301 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R302 | 1-218-839-91 | s | RES, CHIP 470 (1608) |
| R303 | 1-218-855-91 | s | RES, CHIP 2.2K (1608) |
| R305 | 1-218-883-91 | s | RES, CHIP 33K (1608) |
| R306 | 1-218-879-91 | s | RES, CHIP 22K (1608) |
| R307 | 1-218-847-91 | s | RES, CHIP 1.0K (1608) |
| R308 | 1-218-839-91 | s | RES, CHIP 470 (1608) |
| R309 | 1-218-839-91 | s | RES, CHIP 470 (1608) |
| R311 | 1-218-895-91 | s | RES, CHIP 100K (1608) |
| R312 | 1-218-831-91 | s | RES, CHIP 220 (1608) |
| R313 | 1-218-871-91 | s | RES, CHIP 10K (1608) |
| R314 | 1-218-871-91 | s | RES, CHIP 10K (1608) |
| R315 | 1-211-985-91 | s | RES, CHIP 47 (1608) |
| R316 | 1-211-985-91 | s | RES, CHIP 47 (1608) |
| R317 | 1-211-985-91 | s | RES, CHIP 47 (1608) |
| R318 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R319 | 1-211-985-91 | s | RES, CHIP 47 (1608) |
| R320 | 1-218-871-91 | s | RES, CHIP 10K (1608) |
| R321 | 1-218-871-91 | s | RES, CHIP 10K (1608) |
| R322 | 1-218-847-91 | s | RES, CHIP 1.0K (1608) |
| R323 | 1-218-855-91 | s | RES, CHIP 2.2K (1608) |
| R324 | 1-218-835-91 | s | RES, CHIP 330 (1608) |
| R325 | 1-218-851-91 | s | RES, CHIP 1.5K (1608) |
| R326 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R327 | 1-211-969-91 | s | RES, CHIP 10 (1608) |
| R329 | 1-218-879-91 | s | RES, CHIP 22K (1608) |
| R331 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R332 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R333 | 1-211-985-91 | s | RES, CHIP 47 (1608) |
| R334 | 1-218-871-91 | s | RES, CHIP 10K (1608) |
| R341 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R342 | 1-218-871-91 | s | RES, CHIP 10K (1608) |
| R343 | 1-218-871-91 | s | RES, CHIP 10K (1608) |
| R344 | 1-218-871-91 | s | RES, CHIP 10K (1608) |
| R345 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| R346 | 1-218-871-91 | s | RES, CHIP 10K (1608) |
| R347 | 1-218-863-91 | s | RES, CHIP 4.7K (1608) |
| R348 | 1-218-863-91 | s | RES, CHIP 4.7K (1608) |
| R349 | 1-211-969-91 | s | RES, CHIP 10 (1608) |
| R350 | 1-218-831-91 | s | RES, CHIP 220 (1608) |
| R351 | 1-218-871-91 | s | RES, CHIP 10K (1608) |
| R352 | 1-218-871-91 | s | RES, CHIP 10K (1608) |
| R353 | 1-218-871-91 | s | RES, CHIP 10K (1608) |
| R354 | 1-218-863-91 | s | RES, CHIP 4.7K (1608) |
| R355 | 1-218-847-91 | s | RES, CHIP 1.0K (1608) |

(EN-159B BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R356 | 1-218-847-91 | s | RES, CHIP 1.0K (1608) |
| R357 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| R358 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| R360 | 1-218-831-91 | s | RES, CHIP 220 (1608) |
| R361 | 1-218-831-91 | s | RES, CHIP 220 (1608) |
| R362 | 1-218-831-91 | s | RES, CHIP 220 (1608) |
| R363 | 1-218-831-91 | s | RES, CHIP 220 (1608) |
| R364 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R365 | 1-211-985-91 | s | RES, CHIP 47 (1608) |
| R366 | 1-218-855-91 | s | RES, CHIP 2.2K (1608) |
| R367 | 1-218-831-91 | s | RES, CHIP 220 (1608) |
| R368 | 1-218-831-91 | s | RES, CHIP 220 (1608) |
| R369 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R370 | 1-218-831-91 | s | RES, CHIP 220 (1608) |
| R371 | 1-218-831-91 | s | RES, CHIP 220 (1608) |
| R372 | 1-218-831-91 | s | RES, CHIP 220 (1608) |
| R373 | 1-218-847-91 | s | RES, CHIP 1.0K (1608) |
| R375 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| R376 | 1-218-855-91 | s | RES, CHIP 2.2K (1608) |
| R377 | 1-218-851-91 | s | RES, CHIP 1.5K (1608) |
| R378 | 1-211-985-91 | s | RES, CHIP 47 (1608) |
| R379 | 1-218-851-91 | s | RES, CHIP 1.5K (1608) |
| R380 | 1-218-843-91 | s | RES, CHIP 680 (1608) |
| R381 | 1-218-851-91 | s | RES, CHIP 1.5K (1608) |
| R382 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| R383 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| R384 | 1-218-843-91 | s | RES, CHIP 680 (1608) |
| R387 | 1-218-827-91 | s | RES, CHIP 150 (1608) |
| R390 | 1-218-831-91 | s | RES, CHIP 220 (1608) |
| R391 | 1-218-827-91 | s | RES, CHIP 150 (1608) |
| R392 | 1-218-827-91 | s | RES, CHIP 150 (1608) |
| R393 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R394 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R396 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R398 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R400 | 1-218-859-91 | s | RES, CHIP 3.3K (1608) |
| R401 | 1-218-859-91 | s | RES, CHIP 3.3K (1608) |
| R402 | 1-218-859-91 | s | RES, CHIP 3.3K (1608) |
| R403 | 1-218-831-91 | s | RES, CHIP 220 (1608) |
| R404 | 1-218-831-91 | s | RES, CHIP 220 (1608) |
| R405 | 1-218-831-91 | s | RES, CHIP 220 (1608) |
| R406 | 1-218-835-91 | s | RES, CHIP 330 (1608) |
| R407 | 1-218-835-91 | s | RES, CHIP 330 (1608) |
| R408 | 1-218-835-91 | s | RES, CHIP 330 (1608) |
| R409 | 1-218-851-91 | s | RES, CHIP 1.5K (1608) |
| R410 | 1-218-851-91 | s | RES, CHIP 1.5K (1608) |
| R411 | 1-218-855-91 | s | RES, CHIP 2.2K (1608) |
| R412 | 1-218-851-91 | s | RES, CHIP 1.5K (1608) |
| R413 | 1-218-851-91 | s | RES, CHIP 1.5K (1608) |
| R414 | 1-218-855-91 | s | RES, CHIP 2.2K (1608) |
| R415 | 1-218-851-91 | s | RES, CHIP 1.5K (1608) |
| R416 | 1-218-851-91 | s | RES, CHIP 1.5K (1608) |
| R417 | 1-218-855-91 | s | RES, CHIP 2.2K (1608) |
| R418 | 1-218-887-91 | s | RES, CHIP 47K (1608) |
| R419 | 1-218-903-91 | s | RES, CHIP 220K (1608) |
| R420 | 1-218-887-91 | s | RES, CHIP 47K (1608) |
| R421 | 1-218-903-91 | s | RES, CHIP 220K (1608) |
| R422 | 1-218-887-91 | s | RES, CHIP 47K (1608) |
| R423 | 1-218-903-91 | s | RES, CHIP 220K (1608) |

(EN-159B BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R424 | 1-218-875-91 | s | RES, CHIP 15K (1608) |
| R425 | 1-218-875-91 | s | RES, CHIP 15K (1608) |
| R426 | 1-218-875-91 | s | RES, CHIP 15K (1608) |
| R427 | 1-218-835-91 | s | RES, CHIP 330 (1608) |
| R428 | 1-218-835-91 | s | RES, CHIP 330 (1608) |
| R429 | 1-218-835-91 | s | RES, CHIP 330 (1608) |
| R430 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R431 | 1-218-851-91 | s | RES, CHIP 1.5K (1608) |
| R432 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R433 | 1-218-851-91 | s | RES, CHIP 1.5K (1608) |
| R434 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R435 | 1-218-851-91 | s | RES, CHIP 1.5K (1608) |
| R436 | 1-218-851-91 | s | RES, CHIP 1.5K (1608) |
| R437 | 1-218-867-91 | s | RES, CHIP 6.8K (1608) |
| R438 | 1-218-843-91 | s | RES, CHIP 680 (1608) |
| R439 | 1-218-851-91 | s | RES, CHIP 1.5K (1608) |
| R440 | 1-218-867-91 | s | RES, CHIP 6.8K (1608) |
| R441 | 1-218-843-91 | s | RES, CHIP 680 (1608) |
| R442 | 1-218-851-91 | s | RES, CHIP 1.5K (1608) |
| R443 | 1-218-867-91 | s | RES, CHIP 6.8K (1608) |
| R444 | 1-218-843-91 | s | RES, CHIP 680 (1608) |
| R445 | 1-211-989-91 | s | RES, CHIP 68 (1608) |
| R446 | 1-211-989-91 | s | RES, CHIP 68 (1608) |
| R447 | 1-211-989-91 | s | RES, CHIP 68 (1608) |
| R448 | 1-218-843-91 | s | RES, CHIP 680 (1608) |
| R449 | 1-218-843-91 | s | RES, CHIP 680 (1608) |
| R450 | 1-218-843-91 | s | RES, CHIP 680 (1608) |
| R451 | 1-218-831-91 | s | RES, CHIP 220 (1608) |
| R452 | 1-218-831-91 | s | RES, CHIP 220 (1608) |
| R453 | 1-218-831-91 | s | RES, CHIP 220 (1608) |
| R454 | 1-218-831-91 | s | RES, CHIP 220 (1608) |
| R455 | 1-218-831-91 | s | RES, CHIP 220 (1608) |
| R456 | 1-218-831-91 | s | RES, CHIP 220 (1608) |
| R457 | 1-218-831-91 | s | RES, CHIP 220 (1608) |
| R458 | 1-211-969-91 | s | RES, CHIP 10 (1608) |
| R459 | 1-211-969-91 | s | RES, CHIP 10 (1608) |
| R501 | 1-218-871-91 | s | RES, CHIP 10K (1608) |
| R502 | 1-218-871-91 | s | RES, CHIP 10K (1608) |
| R503 | 1-218-847-91 | s | RES, CHIP 1.0K (1608) |
| R504 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R505 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R506 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R507 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R508 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R509 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R510 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R511 | 1-218-871-91 | s | RES, CHIP 10K (1608) |
| R512 | 1-218-871-91 | s | RES, CHIP 10K (1608) |
| R513 | 1-218-871-91 | s | RES, CHIP 10K (1608) |
| R514 | 1-211-985-91 | s | RES, CHIP 47 (1608) |
| R515 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| R516 | 1-218-847-91 | s | RES, CHIP 1.0K (1608) |
| R517 | 1-211-985-91 | s | RES, CHIP 47 (1608) |
| R518 | 1-218-867-91 | s | RES, CHIP 6.8K (1608) |
| R519 | 1-218-847-91 | s | RES, CHIP 1.0K (1608) |
| R520 | 1-218-859-91 | s | RES, CHIP 3.3K (1608) |
| R521 | 1-218-855-91 | s | RES, CHIP 2.2K (1608) |
| R522 | 1-218-835-91 | s | RES, CHIP 330 (1608) |
| R523 | 1-218-835-91 | s | RES, CHIP 330 (1608) |

(EN-159B BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R524 | 1-218-835-91 | s | RES, CHIP 330 (1608) |
| R525 | 1-218-847-91 | s | RES, CHIP 1.0K (1608) |
| R526 | 1-218-847-91 | s | RES, CHIP 1.0K (1608) |
| R527 | 1-218-847-91 | s | RES, CHIP 1.0K (1608) |
| R528 | 1-218-847-91 | s | RES, CHIP 1.0K (1608) |
| R529 | 1-218-859-91 | s | RES, CHIP 3.3K (1608) |
| R530 | 1-218-837-91 | s | RES, CHIP 390 (1608) |
| R531 | 1-218-859-91 | s | RES, CHIP 3.3K (1608) |
| R532 | 1-218-837-91 | s | RES, CHIP 390 (1608) |
| R533 | 1-218-859-91 | s | RES, CHIP 3.3K (1608) |
| R534 | 1-218-837-91 | s | RES, CHIP 390 (1608) |
| R535 | 1-218-847-91 | s | RES, CHIP 1.0K (1608) |
| R536 | 1-218-847-91 | s | RES, CHIP 1.0K (1608) |
| R537 | 1-218-847-91 | s | RES, CHIP 1.0K (1608) |
| R538 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R539 | 1-218-863-91 | s | RES, CHIP 4.7K (1608) |
| R540 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R541 | 1-218-863-91 | s | RES, CHIP 4.7K (1608) |
| R542 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R543 | 1-218-863-91 | s | RES, CHIP 4.7K (1608) |
| R544 | 1-211-985-91 | s | RES, CHIP 47 (1608) |
| R545 | 1-211-985-91 | s | RES, CHIP 47 (1608) |
| R546 | 1-211-985-91 | s | RES, CHIP 47 (1608) |
| R547 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R548 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R549 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R550 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R551 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R552 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R553 | 1-211-985-91 | s | RES, CHIP 47 (1608) |
| R554 | 1-211-985-91 | s | RES, CHIP 47 (1608) |
| R555 | 1-211-985-91 | s | RES, CHIP 47 (1608) |
| R556 | 1-218-843-91 | s | RES, CHIP 680 (1608) |
| R557 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| R558 | 1-218-843-91 | s | RES, CHIP 680 (1608) |
| R559 | 1-218-859-91 | s | RES, CHIP 3.3K (1608) |
| R560 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| R561 | 1-218-843-91 | s | RES, CHIP 680 (1608) |
| R562 | 1-218-859-91 | s | RES, CHIP 3.3K (1608) |
| R563 | 1-218-859-91 | s | RES, CHIP 3.3K (1608) |
| R564 | 1-218-831-91 | s | RES, CHIP 220 (1608) |
| R565 | 1-218-831-91 | s | RES, CHIP 220 (1608) |
| R566 | 1-218-831-91 | s | RES, CHIP 220 (1608) |
| R567 | 1-218-831-91 | s | RES, CHIP 220 (1608) |
| R568 | 1-218-899-91 | s | RES, CHIP 150K (1608) |
| R569 | 1-218-831-91 | s | RES, CHIP 220 (1608) |
| R570 | 1-218-835-91 | s | RES, CHIP 330 (1608) |
| R571 | 1-218-835-91 | s | RES, CHIP 330 (1608) |
| R572 | 1-218-835-91 | s | RES, CHIP 330 (1608) |
| R573 | 1-218-847-91 | s | RES, CHIP 1.0K (1608) |
| R574 | 1-218-863-91 | s | RES, CHIP 4.7K (1608) |
| R575 | 1-218-883-91 | s | RES, CHIP 33K (1608) |
| R576 | 1-218-847-91 | s | RES, CHIP 1.0K (1608) |
| R577 | 1-218-863-91 | s | RES, CHIP 4.7K (1608) |
| R578 | 1-218-883-91 | s | RES, CHIP 33K (1608) |
| R579 | 1-218-847-91 | s | RES, CHIP 1.0K (1608) |
| R580 | 1-218-859-91 | s | RES, CHIP 3.3K (1608) |
| R581 | 1-218-855-91 | s | RES, CHIP 2.2K (1608) |
| R582 | 1-218-847-91 | s | RES, CHIP 1.0K (1608) |

(EN-159B BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R583 | 1-218-859-91 | s | RES, CHIP 3.3K (1608) |
| R584 | 1-218-855-91 | s | RES, CHIP 2.2K (1608) |
| R585 | 1-218-847-91 | s | RES, CHIP 1.0K (1608) |
| R586 | 1-218-859-91 | s | RES, CHIP 3.3K (1608) |
| R587 | 1-218-855-91 | s | RES, CHIP 2.2K (1608) |
| R588 | 1-218-871-91 | s | RES, CHIP 10K (1608) |
| R589 | 1-218-875-91 | s | RES, CHIP 15K (1608) |
| R590 | 1-218-875-91 | s | RES, CHIP 15K (1608) |
| R591 | 1-218-875-91 | s | RES, CHIP 15K (1608) |
| R592 | 1-218-855-91 | s | RES, CHIP 2.2K (1608) |
| R593 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R594 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R595 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R596 | 1-218-871-91 | s | RES, CHIP 10K (1608) |
| R597 | 1-218-859-91 | s | RES, CHIP 3.3K (1608) |
| R598 | 1-218-887-91 | s | RES, CHIP 47K (1608) |
| R599 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R600 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R601 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R602 | 1-218-851-91 | s | RES, CHIP 1.5K (1608) |
| R603 | 1-218-887-91 | s | RES, CHIP 47K (1608) |
| R604 | 1-218-831-91 | s | RES, CHIP 220 (1608) |
| R605 | 1-218-831-91 | s | RES, CHIP 220 (1608) |
| R606 | 1-218-859-91 | s | RES, CHIP 3.3K (1608) |
| R607 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| R608 | 1-218-847-91 | s | RES, CHIP 1.0K (1608) |
| R609 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| R610 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R611 | 1-218-827-91 | s | RES, CHIP 150 (1608) |
| R612 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R613 | 1-218-827-91 | s | RES, CHIP 150 (1608) |
| R614 | 1-218-859-91 | s | RES, CHIP 3.3K (1608) |
| R615 | 1-218-859-91 | s | RES, CHIP 3.3K (1608) |
| R616 | 1-218-859-91 | s | RES, CHIP 3.3K (1608) |
| R617 | 1-218-859-91 | s | RES, CHIP 3.3K (1608) |
| R618 | 1-218-851-91 | s | RES, CHIP 1.5K (1608) |
| R619 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R620 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R621 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R622 | 1-218-851-91 | s | RES, CHIP 1.5K (1608) |
| R623 | 1-218-827-91 | s | RES, CHIP 150 (1608) |
| R624 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R625 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R626 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R627 | 1-218-863-91 | s | RES, CHIP 4.7K (1608) |
| R628 | 1-218-871-91 | s | RES, CHIP 10K (1608) |
| R629 | 1-218-887-91 | s | RES, CHIP 47K (1608) |
| R630 | 1-218-843-91 | s | RES, CHIP 680 (1608) |
| R631 | 1-218-871-91 | s | RES, CHIP 10K (1608) |
| R632 | 1-218-887-91 | s | RES, CHIP 47K (1608) |
| R633 | 1-218-843-91 | s | RES, CHIP 680 (1608) |
| R634 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R635 | 1-211-977-91 | s | RES, CHIP 22 (1608) |
| R636 | 1-218-851-91 | s | RES, CHIP 1.5K (1608) |
| R637 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| R638 | 1-211-989-91 | s | RES, CHIP 68 (1608) |
| R639 | 1-211-989-91 | s | RES, CHIP 68 (1608) |
| R640 | 1-218-843-91 | s | RES, CHIP 680 (1608) |
| R641 | 1-218-823-91 | s | RES, CHIP 100 (1608) |

(EN-159B BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R642 | 1-218-831-91 | s | RES, CHIP 220 (1608) |
| R643 | 1-218-843-91 | s | RES, CHIP 680 (1608) |
| R644 | 1-218-859-91 | s | RES, CHIP 3.3K (1608) |
| R645 | 1-218-851-91 | s | RES, CHIP 1.5K (1608) |
| R646 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R647 | 1-218-831-91 | s | RES, CHIP 220 (1608) |
| R648 | 1-218-875-91 | s | RES, CHIP 15K (1608) |
| R649 | 1-218-879-91 | s | RES, CHIP 22K (1608) |
| R650 | 1-218-839-91 | s | RES, CHIP 470 (1608) |
| R651 | 1-218-851-91 | s | RES, CHIP 1.5K (1608) |
| R652 | 1-218-835-91 | s | RES, CHIP 330 (1608) |
| R653 | 1-218-831-91 | s | RES, CHIP 220 (1608) |
| R654 | 1-218-827-91 | s | RES, CHIP 150 (1608) |
| R655 | 1-218-827-91 | s | RES, CHIP 150 (1608) |
| R656 | 1-211-989-91 | s | RES, CHIP 68 (1608) |
| R657 | 1-218-827-91 | s | RES, CHIP 150 (1608) |
| R658 | 1-218-827-91 | s | RES, CHIP 150 (1608) |
| R659 | 1-218-843-91 | s | RES, CHIP 680 (1608) |
| R660 | 1-218-831-91 | s | RES, CHIP 220 (1608) |
| R661 | 1-218-827-91 | s | RES, CHIP 150 (1608) |
| R662 | 1-218-827-91 | s | RES, CHIP 150 (1608) |
| R664 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| R665 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| R666 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| R671 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R672 | 1-218-887-91 | s | RES, CHIP 47K (1608) |
| R674 | 1-218-863-91 | s | RES, CHIP 4.7K (1608) |
| R675 | 1-218-863-91 | s | RES, CHIP 4.7K (1608) |
| R901 | 1-218-895-91 | s | RES, CHIP 100K (1608) |
| R902 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R903 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R904 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R905 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R906 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R907 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R908 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R909 | 1-218-887-91 | s | RES, CHIP 47K (1608) |
| R910 | 1-218-887-91 | s | RES, CHIP 47K (1608) |
| R911 | 1-218-847-91 | s | RES, CHIP 1.0K (1608) |
| R912 | 1-218-847-91 | s | RES, CHIP 1.0K (1608) |
| R913 | 1-218-831-91 | s | RES, CHIP 220 (1608) |
| R914 | 1-218-843-91 | s | RES, CHIP 680 (1608) |
| RB101 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB102 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB103 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB104 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB105 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB106 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB107 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB108 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB109 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB110 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB111 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB112 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB113 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB114 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB115 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB116 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |

(EN-159B BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| RB117 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB118 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB119 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB120 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB121 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB122 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB123 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB124 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB125 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB127 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB128 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB201 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB202 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB203 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB204 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB205 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB206 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB207 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB208 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB209 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB210 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB211 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB212 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB213 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB214 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB215 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB216 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB217 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB218 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB219 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB220 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB221 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB222 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB223 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB224 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB225 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB226 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB227 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB228 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB229 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB230 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB231 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB232 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB233 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB234 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB235 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB236 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB237 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB238 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB239 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB240 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB241 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB242 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB243 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB244 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB245 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB246 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB247 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB248 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |

(EN-159B BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| RB249 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB250 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB251 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB252 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB253 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB254 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB255 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB301 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB302 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB303 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB304 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB305 | 1-234-379-21 | s | RES, NETWORK 22K (1005X4) |
| RB306 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB307 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB308 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB309 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB311 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB312 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB313 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB314 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB315 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB316 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB317 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB318 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB319 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB320 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB321 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB322 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB323 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB324 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB325 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB326 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB327 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB328 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB329 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB330 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB331 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB501 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB502 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB503 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB504 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB505 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB506 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB507 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB508 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB509 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB510 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB511 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB512 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB513 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB514 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB515 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB516 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB517 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB518 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB519 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB520 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB521 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB522 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |

(EN-159B BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| RB523 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB524 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB525 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB526 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB527 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB528 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB535 | 1-234-523-21 | s | RES, CHIP NETWORK 0 (3216) |
| RB536 | 1-234-523-21 | s | RES, CHIP NETWORK 0 (3216) |
| RB537 | 1-234-523-21 | s | RES, CHIP NETWORK 0 (3216) |
| RB538 | 1-234-523-21 | s | RES, CHIP NETWORK 0 (3216) |
| RB544 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RV301 | 1-225-793-21 | s | RES, ADJ, CERMET 20K |
| RV302 | 1-225-792-21 | s | RES, ADJ, CERMET 10K |
| RV303 | 1-225-787-21 | s | RES, ADJ, CERMET 500 |
| RV304 | 1-225-787-21 | s | RES, ADJ, CERMET 500 |
| RV305 | 1-225-787-21 | s | RES, ADJ, CERMET 500 |
| RV501 | 1-225-792-21 | s | RES, ADJ, CERMET 10K |
| RV502 | 1-225-791-21 | s | RES, ADJ, CERMET 5K |
| RV503 | 1-225-791-21 | s | RES, ADJ, CERMET 5K |
| RV504 | 1-225-787-21 | s | RES, ADJ, CERMET 500 |
| RV505 | 1-225-787-21 | s | RES, ADJ, CERMET 500 |
| RV506 | 1-225-787-21 | s | RES, ADJ, CERMET 500 |
| S201 | 1-762-120-21 | s | SWITCH, TOGGLE |
| S301 | 1-570-711-33 | s | SWITCH, SLIDE |
| THP101 ⚠ | 1-533-817-21 | s | THERMISTOR |
| THP102 ⚠ | 1-533-817-21 | s | THERMISTOR |
| THP103 ⚠ | 1-533-817-21 | s | THERMISTOR |
| THP104 ⚠ | 1-533-817-21 | s | THERMISTOR |
| THP105 ⚠ | 1-533-817-21 | s | THERMISTOR |
| THP106 ⚠ | 1-803-615-21 | s | THERMISTOR, POSITIVE |
| THP107 ⚠ | 1-803-615-21 | s | THERMISTOR, POSITIVE |
| TP201 | 1-535-877-22 | s | CHIP, CHECKER |
| TP202 | 1-535-877-22 | s | CHIP, CHECKER |
| TP203 | 1-535-877-22 | s | CHIP, CHECKER |
| TP204 | 1-535-877-22 | s | CHIP, CHECKER |
| TP205 | 1-535-877-22 | s | CHIP, CHECKER |
| TP206 | 1-535-877-22 | s | CHIP, CHECKER |
| TP207 | 1-535-877-22 | s | CHIP, CHECKER |
| TP301 | 1-535-877-22 | s | CHIP, CHECKER |
| TP302 | 1-535-877-22 | s | CHIP, CHECKER |
| TP303 | 1-535-877-22 | s | CHIP, CHECKER |
| TP304 | 1-535-877-22 | s | CHIP, CHECKER |
| TP305 | 1-535-877-22 | s | CHIP, CHECKER |
| TP306 | 1-535-877-22 | s | CHIP, CHECKER |
| TP307 | 1-535-877-22 | s | CHIP, CHECKER |
| TP501 | 1-535-877-22 | s | CHIP, CHECKER |
| TP502 | 1-535-877-22 | s | CHIP, CHECKER |
| TP503 | 1-535-877-22 | s | CHIP, CHECKER |

---
HIF-25 BOARD
---

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| 1pc | A-1129-304-A | s | MOUNTED CIRCUIT BOARD, HIF-25 |
| 4pcs | 3-364-941-01 | s | SCREW (+B) (2.6X5), NYLOK |
| C1 | 1-128-589-21 | s | CAP, CHIP ELECT 47MF |
| C2 | 1-126-396-21 | s | CAP, CHIP ELECT 47MF (6.3X5.7) |
| C3 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C4 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C6 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C7 | 1-126-394-21 | s | CAP, CHIP ELECT 10MF (4X5.7) |
| C11 | 1-128-589-21 | s | CAP, CHIP ELECT 47MF |
| C101 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C102 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C103 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C104 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C105 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C106 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C107 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C201 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C202 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C203 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C204 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C205 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C206 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C207 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| CN102 | 1-793-324-11 | o | CONNECTOR, COAXIAL (BNC TYPE) |
| CN103 | 1-793-324-11 | o | CONNECTOR, COAXIAL (BNC TYPE) |
| CN104 | 1-793-324-11 | o | CONNECTOR, COAXIAL (BNC TYPE) |
| CN105 | 1-793-324-11 | o | CONNECTOR, COAXIAL (BNC TYPE) |
| E1 | 1-535-877-22 | s | CHIP, CHECKER |
| FB101 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB102 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB201 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB202 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| IC1 | 8-759-327-01 | s | IC NJM062V(TE2) |
| IC2 | 6-704-976-01 | s | IC ADR381ARTZ-REEL7 |
| IC101 | 6-702-621-01 | s | IC GS1528-CKAE3 |
| IC201 | 6-702-621-01 | s | IC GS1528-CKAE3 |
| L1 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L2 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L101 | 1-414-457-21 | s | INDUCTOR, CHIP (S) 3.3NH |
| L102 | 1-414-457-21 | s | INDUCTOR, CHIP (S) 3.3NH |
| L201 | 1-414-457-21 | s | INDUCTOR, CHIP (S) 3.3NH |
| L202 | 1-414-457-21 | s | INDUCTOR, CHIP (S) 3.3NH |
| Q1 | 8-729-209-73 | s | TRANSISTOR 2SA1213Y-TE12L |
| Q2 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q3 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| R1 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R2 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R3 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R4 | 1-208-907-81 | s | RES, CHIP 6.8K (1005) |
| R5 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R6 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R7 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R8 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R9 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R10 | 1-208-927-81 | s | RES, CHIP 47K (1005) |

(HIF-25 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R11 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R12 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R101 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R102 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R103 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R104 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R105 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R106 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R107 | 1-208-860-81 | s | RES, CHIP 75 (1005) |
| R108 | 1-208-860-81 | s | RES, CHIP 75 (1005) |
| R109 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R110 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R113 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R114 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R119 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R120 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R123 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| R124 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| R201 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R202 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R203 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R204 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R205 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R206 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R207 | 1-208-860-81 | s | RES, CHIP 75 (1005) |
| R208 | 1-208-860-81 | s | RES, CHIP 75 (1005) |
| R209 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R210 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R211 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R213 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R217 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R218 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R221 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| R222 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| R225 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R226 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |

---
HIF-26 BOARD
---

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| 1pc | A-1132-794-A | s | MOUNTED CIRCUIT BOARD, HIF-26 |
| 8pcs | 3-364-941-01 | s | SCREW (+B) (2.6X5), NYLOK |
| C1 | 1-128-589-21 | s | CAP, CHIP ELECT 47MF |
| C2 | 1-126-396-21 | s | CAP, CHIP ELECT 47MF (6.3X5.7) |
| C3 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C4 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C6 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C7 | 1-126-394-21 | s | CAP, CHIP ELECT 10MF (4X5.7) |
| C11 | 1-128-589-21 | s | CAP, CHIP ELECT 47MF |
| C101 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C102 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C103 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C104 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C105 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C106 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C107 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C201 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C202 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C203 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C204 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C205 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C206 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C207 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| CN102 | 1-793-324-11 | o | CONNECTOR, COAXIAL (BNC TYPE) |
| CN103 | 1-793-324-11 | o | CONNECTOR, COAXIAL (BNC TYPE) |
| CN104 | 1-793-324-11 | o | CONNECTOR, COAXIAL (BNC TYPE) |
| CN105 | 1-793-324-11 | o | CONNECTOR, COAXIAL (BNC TYPE) |
| E1 | 1-535-877-22 | s | CHIP, CHECKER |
| FB101 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB102 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB201 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB202 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| IC1 | 8-759-327-01 | s | IC NJM062V(TE2) |
| IC2 | 6-704-976-01 | s | IC ADR381ARTZ-REEL7 |
| IC101 | 6-702-621-01 | s | IC GS1528-CKAE3 |
| IC201 | 6-702-621-01 | s | IC GS1528-CKAE3 |
| L1 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L2 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L101 | 1-414-457-21 | s | INDUCTOR, CHIP (S) 3.3NH |
| L102 | 1-414-457-21 | s | INDUCTOR, CHIP (S) 3.3NH |
| L201 | 1-414-457-21 | s | INDUCTOR, CHIP (S) 3.3NH |
| L202 | 1-414-457-21 | s | INDUCTOR, CHIP (S) 3.3NH |
| Q1 | 8-729-209-73 | s | TRANSISTOR 2SA1213Y-TE12L |
| Q2 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q3 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| R1 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R2 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R3 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R4 | 1-208-907-81 | s | RES, CHIP 6.8K (1005) |
| R5 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R6 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R7 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R8 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R9 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R10 | 1-208-927-81 | s | RES, CHIP 47K (1005) |

(HIF-26 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R11 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R12 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R101 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R102 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R103 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R104 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R105 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R106 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R107 | 1-208-860-81 | s | RES, CHIP 75 (1005) |
| R108 | 1-208-860-81 | s | RES, CHIP 75 (1005) |
| R109 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R110 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R113 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R114 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R119 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R120 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R123 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| R124 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| R201 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R202 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R203 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R204 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R205 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R206 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R207 | 1-208-860-81 | s | RES, CHIP 75 (1005) |
| R208 | 1-208-860-81 | s | RES, CHIP 75 (1005) |
| R209 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R210 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R211 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R213 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R217 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R218 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R221 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| R222 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |

## HIF-27 BOARD

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| 3pcs | A-1129-308-A | s | MOUNTED CIRCUIT BOARD, HIF-27 |
| 3pcs | 3-364-941-01 | s | SCREW (+B) (2.6X5), NYLOK |
| C1 | 1-128-589-21 | s | CAP, CHIP ELECT 47MF |
| C2 | 1-126-396-21 | s | CAP, CHIP ELECT 47MF (6.3X5.7) |
| C3 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C4 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C6 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C7 | 1-126-394-21 | s | CAP, CHIP ELECT 10MF (4X5.7) |
| C11 | 1-128-589-21 | s | CAP, CHIP ELECT 47MF |
| C101 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C102 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C103 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C104 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C105 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C106 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C107 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C201 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C202 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C203 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C204 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C205 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C206 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C207 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| CN102 | 1-793-324-11 | o | CONNECTOR, COAXIAL (BNC TYPE) |
| CN103 | 1-793-324-11 | o | CONNECTOR, COAXIAL (BNC TYPE) |
| CN104 | 1-793-324-11 | o | CONNECTOR, COAXIAL (BNC TYPE) |
| E1 | 1-535-877-22 | s | CHIP, CHECKER |
| FB101 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB102 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB201 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB202 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| IC1 | 8-759-327-01 | s | IC NJM062V(TE2) |
| IC2 | 6-704-976-01 | s | IC ADR381ARTZ-REEL7 |
| IC101 | 6-702-621-01 | s | IC GS1528-CKAE3 |
| IC201 | 6-702-621-01 | s | IC GS1528-CKAE3 |
| L1 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L2 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L101 | 1-414-457-21 | s | INDUCTOR, CHIP (S) 3.3NH |
| L102 | 1-414-457-21 | s | INDUCTOR, CHIP (S) 3.3NH |
| L201 | 1-414-457-21 | s | INDUCTOR, CHIP (S) 3.3NH |
| L202 | 1-414-457-21 | s | INDUCTOR, CHIP (S) 3.3NH |
| Q1 | 8-729-209-73 | s | TRANSISTOR 2SA1213Y-TE12L |
| Q2 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q3 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| R1 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R2 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R3 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R4 | 1-208-907-81 | s | RES, CHIP 6.8K (1005) |
| R5 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R6 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R7 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R8 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R9 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R10 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R11 | 1-208-863-81 | s | RES, CHIP 100 (1005) |

(HIF-27 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R12 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R101 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R102 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R103 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R104 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R105 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R106 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R107 | 1-208-860-81 | s | RES, CHIP 75 (1005) |
| R108 | 1-208-860-81 | s | RES, CHIP 75 (1005) |
| R109 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R110 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R113 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R114 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R119 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R120 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R123 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| R124 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| R201 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R202 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R203 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R204 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R205 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R206 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R207 | 1-208-860-81 | s | RES, CHIP 75 (1005) |
| R208 | 1-208-860-81 | s | RES, CHIP 75 (1005) |
| R209 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R210 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R211 | 1-208-860-81 | s | RES, CHIP 75 (1005) |
| R213 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R217 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R218 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R221 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| R222 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| R225 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R226 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |

## MB-1073 BOARD

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| 1pc | A-1206-286-A | s | MOUNTED CIRCUIT BOARD, MB-1073 |
| CN31 | 1-580-547-11 | o | PIN, CONNECTOR (PC BOARD) 36P |
| CN32 | 1-779-092-11 | s | PIN, CONNECTOR (PC BOARD) 10P |
| CN33 | 1-564-506-51 | o | PLUG, CONNECTOR 3P |

## OTR-1 BOARD

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| 1pc | A-1206-238-A | s | MOUNTED CIRCUIT BOARD, OTR-1 |
| 1pc | ⚠ 1-797-716-11 | s | MODULE,OPTICAL (XFP) |
| C1 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C2 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C3 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C4 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C5 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C6 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C7 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C8 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C9 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C10 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C11 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C12 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C13 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C14 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C15 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C16 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C17 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C18 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C19 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C20 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C21 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C22 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C23 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C24 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C25 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C26 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C27 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C28 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C29 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C30 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C31 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C32 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C33 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C34 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C35 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C36 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C37 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C38 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C39 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C40 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C41 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C42 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C43 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C44 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C45 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C46 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C47 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C48 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C49 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C50 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C51 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C52 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C53 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C54 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C55 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C56 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |

## (OTR-1 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C57 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C58 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C59 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C60 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C61 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C62 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C63 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C64 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C65 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C66 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C67 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C68 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C69 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C70 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C71 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C72 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C73 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C74 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C75 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C76 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C77 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C78 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C79 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C80 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C81 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C82 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C83 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C84 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C85 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C86 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C87 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C88 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C89 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C90 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C91 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C92 | 1-112-015-91 | s | CAP, CHIP CERAMIC 47MF B 3225 |
| C93 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C94 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C95 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C96 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C97 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C98 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C99 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C100 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C101 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C102 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C103 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C104 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C105 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C106 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C107 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C108 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C109 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C110 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C111 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C112 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C113 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C114 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C115 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |

(OTR-1 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C116 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C117 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C118 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C119 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C120 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C121 | 1-112-015-91 | s | CAP, CHIP CERAMIC 47MF B 3225 |
| C201 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C202 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C203 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C204 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C401 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C402 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C403 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C404 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C405 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C406 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C531 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C532 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C533 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C534 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C535 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C536 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C537 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C538 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C539 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C540 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C541 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C542 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C543 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C544 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C545 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C546 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C547 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C548 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C549 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C550 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C551 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C552 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C553 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C554 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C555 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C556 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C557 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C558 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C559 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C560 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C561 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C562 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C563 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C564 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C565 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C566 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C567 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C568 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C569 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C570 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C571 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C572 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C573 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |

(OTR-1 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C574 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C601 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C602 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C603 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C604 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C605 | 1-100-415-91 | s | CAP, CHIP CERAMIC 0.47MF(1005) |
| C606 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C607 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C701 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C702 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C703 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C704 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C705 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C706 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C707 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C708 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C709 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C710 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C711 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C712 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C713 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C714 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C715 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C716 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C717 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C718 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C719 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C720 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C721 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C722 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C723 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C724 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C725 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C726 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C727 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C728 | 1-164-874-81 | s | CAP,CHIP CERAMIC 100PF CH 1005 |
| C729 | 1-164-874-81 | s | CAP,CHIP CERAMIC 100PF CH 1005 |
| C732 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C733 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C734 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C736 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C737 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C801 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C802 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C803 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C805 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C806 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C807 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C808 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C809 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C810 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C811 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C812 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C813 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C814 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C815 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C816 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C817 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C818 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |

(OTR-1 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C819 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C820 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C821 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C822 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C823 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C824 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C825 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C826 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C827 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C828 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C829 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C830 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C831 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C832 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C833 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C834 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C835 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C836 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C837 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C838 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C839 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C840 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C841 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C842 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C843 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C844 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C845 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C846 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C847 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C848 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C849 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C850 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C851 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C852 | 1-164-866-81 | s | CAP, CHIP CERAMIC 47PF CH 1005 |
| C854 | 1-164-866-81 | s | CAP, CHIP CERAMIC 47PF CH 1005 |
| C856 | 1-164-866-81 | s | CAP, CHIP CERAMIC 47PF CH 1005 |
| C857 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C859 | 1-164-866-81 | s | CAP, CHIP CERAMIC 47PF CH 1005 |
| C861 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C862 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C863 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C864 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C866 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C868 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C869 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C870 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C920 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C921 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C922 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C923 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C924 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C925 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C926 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C927 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C928 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C929 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C930 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C931 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C932 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |

(OTR-1 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C933 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C934 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C935 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C936 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C937 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C938 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C939 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C940 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C941 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C942 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C943 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C944 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C945 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C946 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C947 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C948 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C949 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C950 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C951 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C952 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C953 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C954 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C955 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C956 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C957 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C958 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C959 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C960 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C961 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C962 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C963 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C964 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C965 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C966 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C967 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C968 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C969 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C970 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C971 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C972 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C973 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C974 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C975 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C976 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C977 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C978 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C979 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C980 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C981 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C982 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C983 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C984 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C985 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C986 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C987 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C988 | 1-164-937-81 | s | CAP, CHIPCERAMIC 1000PF B 1005 |
| C989 | 1-164-937-81 | s | CAP, CHIPCERAMIC 1000PF B 1005 |
| C990 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C991 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |

(OTR-1 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C1001 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C1002 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C1003 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C1004 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C1005 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C1006 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C1007 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C1008 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C1009 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C1010 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C1011 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| C1101 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C1102 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| C1103 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| C1104 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C1105 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C1106 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| C1107 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| C1108 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C1109 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| C1110 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C1111 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C1112 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C1113 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C1114 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C1115 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C1116 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C1117 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C1118 | 1-135-342-21 | s | CAP, ELECT 56MF (6.3X6) |
| C1119 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C1120 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C1121 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C1122 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C1123 | 1-119-923-81 | s | CAP, CERAMIC 0.047MF B 1005 |
| C1124 | 1-119-923-81 | s | CAP, CERAMIC 0.047MF B 1005 |
| C1125 | 1-119-923-81 | s | CAP, CERAMIC 0.047MF B 1005 |
| C1126 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C1127 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C1128 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C1129 | 1-119-923-81 | s | CAP, CERAMIC 0.047MF B 1005 |
| C1130 | 1-119-923-81 | s | CAP, CERAMIC 0.047MF B 1005 |
| C1131 | 1-119-923-81 | s | CAP, CERAMIC 0.047MF B 1005 |
| C1132 | 1-112-015-91 | s | CAP, CHIP CERAMIC 47MF B 3225 |
| C1133 | 1-112-015-91 | s | CAP, CHIP CERAMIC 47MF B 3225 |
| C1134 | 1-112-015-91 | s | CAP, CHIP CERAMIC 47MF B 3225 |
| C1135 | 1-164-227-91 | s | CAP,CERAMIC 22000PF B 1608 |
| C1136 | 1-164-936-81 | s | CAP, CHIP CERAMIC 680PF B 1005 |
| C1137 | 1-164-227-91 | s | CAP,CERAMIC 22000PF B 1608 |
| C1138 | 1-164-936-81 | s | CAP, CHIP CERAMIC 680PF B 1005 |
| C1139 | 1-164-227-91 | s | CAP,CERAMIC 22000PF B 1608 |
| C1140 | 1-164-936-81 | s | CAP, CHIP CERAMIC 680PF B 1005 |
| C1141 | 1-112-015-91 | s | CAP, CHIP CERAMIC 47MF B 3225 |
| C1142 | 1-112-015-91 | s | CAP, CHIP CERAMIC 47MF B 3225 |
| C1143 | 1-112-015-91 | s | CAP, CHIP CERAMIC 47MF B 3225 |
| C1144 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C1145 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C1146 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C1147 | 1-112-015-91 | s | CAP, CHIP CERAMIC 47MF B 3225 |
| C1148 | 1-112-015-91 | s | CAP, CHIP CERAMIC 47MF B 3225 |

(OTR-1 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C1149 | 1-112-015-91 | s | CAP, CHIP CERAMIC 47MF B 3225 |
| C1150 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C1151 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C1152 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C1153 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C1154 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C1155 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C1156 | 1-112-015-91 | s | CAP, CHIP CERAMIC 47MF B 3225 |
| C1157 | 1-112-015-91 | s | CAP, CHIP CERAMIC 47MF B 3225 |
| C1158 | 1-112-015-91 | s | CAP, CHIP CERAMIC 47MF B 3225 |
| CN601 | 1-764-093-21 | o | PIN, CONNECTOR (PC BOARD) 8P |
| CN1001 | 1-820-732-11 | s | CONNECTOR, XFP |
| CN1002 | 1-785-551-21 | o | CONNECTOR, BOARD TO BOARD 120P |
| D201 | 8-719-074-31 | s | DIODE CL-196YG-CD-T |
| D202 | 8-719-074-31 | s | DIODE CL-196YG-CD-T |
| D203 | 8-719-074-31 | s | DIODE CL-196YG-CD-T |
| D204 | 8-719-074-31 | s | DIODE CL-196YG-CD-T |
| D205 | 8-719-077-09 | s | DIODE CL-196HR-CD-T |
| D206 | 8-719-077-09 | s | DIODE CL-196HR-CD-T |
| D207 | 8-719-077-09 | s | DIODE CL-196HR-CD-T |
| D208 | 8-719-077-09 | s | DIODE CL-196HR-CD-T |
| D301 | 8-719-077-09 | s | DIODE CL-196HR-CD-T |
| D302 | 8-719-077-09 | s | DIODE CL-196HR-CD-T |
| D303 | 8-719-077-09 | s | DIODE CL-196HR-CD-T |
| D304 | 8-719-077-09 | s | DIODE CL-196HR-CD-T |
| D305 | 8-719-077-09 | s | DIODE CL-196HR-CD-T |
| D306 | 8-719-077-09 | s | DIODE CL-196HR-CD-T |
| D307 | 8-719-077-09 | s | DIODE CL-196HR-CD-T |
| D308 | 8-719-077-09 | s | DIODE CL-196HR-CD-T |
| D309 | 8-719-077-09 | s | DIODE CL-196HR-CD-T |
| D310 | 8-719-077-09 | s | DIODE CL-196HR-CD-T |
| D311 | 8-719-077-09 | s | DIODE CL-196HR-CD-T |
| D312 | 8-719-077-09 | s | DIODE CL-196HR-CD-T |
| D313 | 8-719-077-09 | s | DIODE CL-196HR-CD-T |
| D314 | 8-719-077-09 | s | DIODE CL-196HR-CD-T |
| D315 | 8-719-077-09 | s | DIODE CL-196HR-CD-T |
| D316 | 8-719-077-09 | s | DIODE CL-196HR-CD-T |
| D601 | 8-719-077-09 | s | DIODE CL-196HR-CD-T |
| D701 | 8-719-077-09 | s | DIODE CL-196HR-CD-T |
| D702 | 8-719-077-09 | s | DIODE CL-196HR-CD-T |
| D703 | 8-719-077-09 | s | DIODE CL-196HR-CD-T |
| D801 | 8-719-077-09 | s | DIODE CL-196HR-CD-T |
| D802 | 8-719-077-09 | s | DIODE CL-196HR-CD-T |
| D803 | 8-719-077-09 | s | DIODE CL-196HR-CD-T |
| D804 | 8-719-077-09 | s | DIODE CL-196HR-CD-T |
| D805 | 8-719-077-09 | s | DIODE CL-196HR-CD-T |
| D806 | 8-719-077-09 | s | DIODE CL-196HR-CD-T |
| D920 | 8-719-077-09 | s | DIODE CL-196HR-CD-T |
| D921 | 8-719-077-09 | s | DIODE CL-196HR-CD-T |
| D922 | 8-719-077-09 | s | DIODE CL-196HR-CD-T |
| D923 | 8-719-077-09 | s | DIODE CL-196HR-CD-T |
| D1001 | 8-719-077-09 | s | DIODE CL-196HR-CD-T |
| D1002 | 8-719-077-09 | s | DIODE CL-196HR-CD-T |
| D1003 | 8-719-077-09 | s | DIODE CL-196HR-CD-T |
| D1004 | 8-719-077-09 | s | DIODE CL-196HR-CD-T |
| D1101 | 8-719-077-09 | s | DIODE CL-196HR-CD-T |
| E1 | 1-535-877-22 | s | CHIP, CHECKER |
| E2 | 1-535-877-22 | s | CHIP, CHECKER |

(OTR-1 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| E3 | 1-535-877-22 | s | CHIP, CHECKER |
| FB201 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB202 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB401 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB402 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB403 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB404 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB531 | 1-400-382-21 | s | EMI FERRITE (SMD) (1608) |
| FB532 | 1-400-382-21 | s | EMI FERRITE (SMD) (1608) |
| FB533 | 1-400-382-21 | s | EMI FERRITE (SMD) (1608) |
| FB534 | 1-400-382-21 | s | EMI FERRITE (SMD) (1608) |
| FB535 | 1-400-382-21 | s | EMI FERRITE (SMD) (1608) |
| FB536 | 1-400-382-21 | s | EMI FERRITE (SMD) (1608) |
| FB537 | 1-400-382-21 | s | EMI FERRITE (SMD) (1608) |
| FB538 | 1-400-382-21 | s | EMI FERRITE (SMD) (1608) |
| FB539 | 1-400-382-21 | s | EMI FERRITE (SMD) (1608) |
| FB540 | 1-400-382-21 | s | EMI FERRITE (SMD) (1608) |
| FB541 | 1-400-382-21 | s | EMI FERRITE (SMD) (1608) |
| FB542 | 1-400-382-21 | s | EMI FERRITE (SMD) (1608) |
| FB543 | 1-400-382-21 | s | EMI FERRITE (SMD) (1608) |
| FB544 | 1-400-382-21 | s | EMI FERRITE (SMD) (1608) |
| FB545 | 1-400-382-21 | s | EMI FERRITE (SMD) (1608) |
| FB546 | 1-400-382-21 | s | EMI FERRITE (SMD) (1608) |
| FB547 | 1-400-382-21 | s | EMI FERRITE (SMD) (1608) |
| FB548 | 1-400-382-21 | s | EMI FERRITE (SMD) (1608) |
| FB549 | 1-400-382-21 | s | EMI FERRITE (SMD) (1608) |
| FB550 | 1-400-382-21 | s | EMI FERRITE (SMD) (1608) |
| FB551 | 1-400-382-21 | s | EMI FERRITE (SMD) (1608) |
| FB552 | 1-400-382-21 | s | EMI FERRITE (SMD) (1608) |
| FB553 | 1-400-382-21 | s | EMI FERRITE (SMD) (1608) |
| FB554 | 1-400-382-21 | s | EMI FERRITE (SMD) (1608) |
| FB555 | 1-400-382-21 | s | EMI FERRITE (SMD) (1608) |
| FB556 | 1-400-382-21 | s | EMI FERRITE (SMD) (1608) |
| FB557 | 1-400-382-21 | s | EMI FERRITE (SMD) (1608) |
| FB558 | 1-400-382-21 | s | EMI FERRITE (SMD) (1608) |
| FB559 | 1-400-382-21 | s | EMI FERRITE (SMD) (1608) |
| FB560 | 1-400-382-21 | s | EMI FERRITE (SMD) (1608) |
| FB561 | 1-400-382-21 | s | EMI FERRITE (SMD) (1608) |
| FB562 | 1-400-382-21 | s | EMI FERRITE (SMD) (1608) |
| FB563 | 1-400-382-21 | s | EMI FERRITE (SMD) (1608) |
| FB564 | 1-400-382-21 | s | EMI FERRITE (SMD) (1608) |
| FB565 | 1-400-382-21 | s | EMI FERRITE (SMD) (1608) |
| FB566 | 1-400-382-21 | s | EMI FERRITE (SMD) (1608) |
| FB567 | 1-400-382-21 | s | EMI FERRITE (SMD) (1608) |
| FB568 | 1-400-382-21 | s | EMI FERRITE (SMD) (1608) |
| FB569 | 1-400-382-21 | s | EMI FERRITE (SMD) (1608) |
| FB570 | 1-400-382-21 | s | EMI FERRITE (SMD) (1608) |
| FB601 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB602 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB701 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB702 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB703 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB704 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB705 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB801 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB802 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB803 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB804 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |

(OTR-1 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| FB805 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB806 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB807 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB808 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB809 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB810 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB920 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB921 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB922 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB923 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB924 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB925 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB926 | 1-400-382-21 | s | EMI FERRITE (SMD) (1608) |
| FB927 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB928 | 1-400-382-21 | s | EMI FERRITE (SMD) (1608) |
| FB1001 | 1-400-382-21 | s | EMI FERRITE (SMD) (1608) |
| FB1002 | 1-400-382-21 | s | EMI FERRITE (SMD) (1608) |
| FB1003 | 1-400-382-21 | s | EMI FERRITE (SMD) (1608) |
| FB1004 | 1-400-382-21 | s | EMI FERRITE (SMD) (1608) |
| FB1101 | 1-400-382-21 | s | EMI FERRITE (SMD) (1608) |
| FB1102 | 1-400-382-21 | s | EMI FERRITE (SMD) (1608) |
| FB1103 | 1-400-382-21 | s | EMI FERRITE (SMD) (1608) |
| FB1104 | 1-400-382-21 | s | EMI FERRITE (SMD) (1608) |
| FB1105 | 1-400-382-21 | s | EMI FERRITE (SMD) (1608) |
| FB1106 | 1-400-382-21 | s | EMI FERRITE (SMD) (1608) |
| FB1107 | 1-400-382-21 | s | EMI FERRITE (SMD) (1608) |
| FB1108 | 1-400-382-21 | s | EMI FERRITE (SMD) (1608) |
| FB1109 | 1-400-382-21 | s | EMI FERRITE (SMD) (1608) |
| FB1110 | 1-400-382-21 | s | EMI FERRITE (SMD) (1608) |
| FB1111 | 1-400-382-21 | s | EMI FERRITE (SMD) (1608) |
| FB1112 | 1-400-382-21 | s | EMI FERRITE (SMD) (1608) |
| IC401 | 6-710-109-01 | s | IC NB100LVEP56MNR2G |
| IC602 | 8-759-363-26 | s | IC RN5VD28AA-TL-FA |
| IC603 | 8-759-592-50 | s | IC TC7SZ126FU(TE85R) |
| IC604 | 6-706-487-01 | s | IC TC7SH08FU(T5RSOYJF) |
| IC605 | 6-706-487-01 | s | IC TC7SH08FU(T5RSOYJF) |
| IC701 | 6-702-536-01 | s | IC MC100LVEL16DTR2 |
| IC702 | 8-759-592-43 | s | IC TC7SZ02FU(TE85R) |
| IC704 | 6-702-535-01 | s | IC MC100LVEL11DTR2 |
| IC705 | 8-759-669-66 | s | IC TLC272CPWR-12 |
| IC801 | 8-759-592-43 | s | IC TC7SZ02FU(TE85R) |
| IC803 | 6-710-109-01 | s | IC NB100LVEP56MNR2G |
| IC804 | 8-759-592-50 | s | IC TC7SZ126FU(TE85R) |
| IC805 | 8-759-592-49 | s | IC TC7SZ125FU(TE85R) |
| IC806 | 6-702-536-01 | s | IC MC100LVEL16DTR2 |
| IC809 | 8-759-669-66 | s | IC TLC272CPWR-12 |
| IC1001 | 6-707-839-01 | s | IC TC74LCX04FT(EKJ) |
| IC1002 | 8-759-346-27 | s | IC LM45BIM3X |
| IC1101 | 6-700-655-01 | s | IC LT1963ES8#TR |
| IC1102 | 8-759-474-95 | s | IC RN5VD42AA-TL-FA |
| IC1103 | 8-759-592-47 | s | IC TC7SZ08FU(TE85R) |
| IC1104 | 6-701-572-01 | s | IC TPS54610PWPR |
| IC1105 | 6-701-572-01 | s | IC TPS54610PWPR |
| IC1106 | 6-701-572-01 | s | IC TPS54610PWPR |
| IC1107 | 8-759-592-42 | s | IC TC7SZ00FU(TE85R) |
| L701 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L801 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L802 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |

(OTR-1 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| L1001 | 1-419-630-21 | s | COIL, CHOKE 4.7UH |
| L1002 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L1101 | 1-416-948-21 | s | COIL, CHOKE 10UH |
| L1102 | 1-416-948-21 | s | COIL, CHOKE 10UH |
| L1103 | 1-416-948-21 | s | COIL, CHOKE 10UH |
| L1104 | 1-416-948-21 | s | COIL, CHOKE 10UH |
| Q201 | 8-729-928-82 | s | TRANSISTOR DTC144EE-TL |
| Q202 | 8-729-928-82 | s | TRANSISTOR DTC144EE-TL |
| Q203 | 8-729-928-82 | s | TRANSISTOR DTC144EE-TL |
| Q204 | 8-729-928-82 | s | TRANSISTOR DTC144EE-TL |
| Q205 | 8-729-928-82 | s | TRANSISTOR DTC144EE-TL |
| Q206 | 8-729-928-82 | s | TRANSISTOR DTC144EE-TL |
| Q207 | 8-729-928-82 | s | TRANSISTOR DTC144EE-TL |
| Q208 | 8-729-928-82 | s | TRANSISTOR DTC144EE-TL |
| Q301 | 8-729-928-82 | s | TRANSISTOR DTC144EE-TL |
| Q302 | 8-729-928-82 | s | TRANSISTOR DTC144EE-TL |
| Q303 | 8-729-928-82 | s | TRANSISTOR DTC144EE-TL |
| Q304 | 8-729-928-82 | s | TRANSISTOR DTC144EE-TL |
| Q305 | 8-729-928-82 | s | TRANSISTOR DTC144EE-TL |
| Q306 | 8-729-928-82 | s | TRANSISTOR DTC144EE-TL |
| Q307 | 8-729-928-82 | s | TRANSISTOR DTC144EE-TL |
| Q308 | 8-729-928-82 | s | TRANSISTOR DTC144EE-TL |
| Q309 | 8-729-928-82 | s | TRANSISTOR DTC144EE-TL |
| Q310 | 8-729-928-82 | s | TRANSISTOR DTC144EE-TL |
| Q311 | 8-729-928-82 | s | TRANSISTOR DTC144EE-TL |
| Q312 | 8-729-928-82 | s | TRANSISTOR DTC144EE-TL |
| Q313 | 8-729-928-82 | s | TRANSISTOR DTC144EE-TL |
| Q314 | 8-729-928-82 | s | TRANSISTOR DTC144EE-TL |
| Q315 | 8-729-928-82 | s | TRANSISTOR DTC144EE-TL |
| Q316 | 8-729-928-82 | s | TRANSISTOR DTC144EE-TL |
| Q601 | 8-729-928-25 | s | TRANSISTOR 2SA1774TL-QR |
| Q701 | 8-729-928-82 | s | TRANSISTOR DTC144EE-TL |
| Q702 | 8-729-928-25 | s | TRANSISTOR 2SA1774TL-QR |
| Q703 | 8-729-928-82 | s | TRANSISTOR DTC144EE-TL |
| Q704 | 8-729-928-25 | s | TRANSISTOR 2SA1774TL-QR |
| Q705 | 8-729-928-25 | s | TRANSISTOR 2SA1774TL-QR |
| Q706 | 8-729-928-25 | s | TRANSISTOR 2SA1774TL-QR |
| Q707 | 8-729-928-25 | s | TRANSISTOR 2SA1774TL-QR |
| Q708 | 8-729-928-25 | s | TRANSISTOR 2SA1774TL-QR |
| Q709 | 8-729-928-25 | s | TRANSISTOR 2SA1774TL-QR |
| Q710 | 8-729-928-25 | s | TRANSISTOR 2SA1774TL-QR |
| Q801 | 8-729-928-82 | s | TRANSISTOR DTC144EE-TL |
| Q802 | 8-729-209-73 | s | TRANSISTOR 2SA1213Y-TE12L |
| Q803 | 8-729-928-25 | s | TRANSISTOR 2SA1774TL-QR |
| Q804 | 8-729-928-82 | s | TRANSISTOR DTC144EE-TL |
| Q805 | 8-729-209-73 | s | TRANSISTOR 2SA1213Y-TE12L |
| Q806 | 8-729-928-25 | s | TRANSISTOR 2SA1774TL-QR |
| Q807 | 8-729-928-82 | s | TRANSISTOR DTC144EE-TL |
| Q808 | 8-729-928-25 | s | TRANSISTOR 2SA1774TL-QR |
| Q809 | 8-729-928-25 | s | TRANSISTOR 2SA1774TL-QR |
| Q810 | 8-729-928-25 | s | TRANSISTOR 2SA1774TL-QR |
| Q811 | 8-729-928-25 | s | TRANSISTOR 2SA1774TL-QR |
| Q812 | 8-729-928-25 | s | TRANSISTOR 2SA1774TL-QR |
| Q813 | 8-729-928-25 | s | TRANSISTOR 2SA1774TL-QR |
| Q814 | 8-729-928-25 | s | TRANSISTOR 2SA1774TL-QR |
| Q815 | 8-729-928-25 | s | TRANSISTOR 2SA1774TL-QR |
| Q816 | 8-729-928-25 | s | TRANSISTOR 2SA1774TL-QR |
| Q1101 | 8-729-928-82 | s | TRANSISTOR DTC144EE-TL |

(OTR-1 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| Q1102 | 8-729-928-82 | s | TRANSISTOR DTC144EE-TL |
| Q1103 | 8-729-928-55 | s | TRANSISTOR DTA123JE-TL |
| R201 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R211 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R212 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R213 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R214 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R217 | 1-208-959-81 | s | RES, CHIP 1M (1005) |
| R221 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R223 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R224 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R225 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R301 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R303 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R304 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R305 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R306 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R307 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R308 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R309 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R310 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R311 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R312 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R313 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R314 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R315 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R316 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R317 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R318 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R319 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R320 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R321 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R322 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R323 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R324 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R325 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R326 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R327 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R338 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R363 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R364 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R401 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R405 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R406 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R407 | 1-220-884-81 | s | RES, CHIP 39 (1005) |
| R408 | 1-208-860-81 | s | RES, CHIP 75 (1005) |
| R409 | 1-220-884-81 | s | RES, CHIP 39 (1005) |
| R410 | 1-208-860-81 | s | RES, CHIP 75 (1005) |
| R411 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R412 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R413 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R414 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R415 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R416 | 1-220-884-81 | s | RES, CHIP 39 (1005) |
| R417 | 1-208-860-81 | s | RES, CHIP 75 (1005) |
| R418 | 1-220-884-81 | s | RES, CHIP 39 (1005) |
| R419 | 1-208-860-81 | s | RES, CHIP 75 (1005) |
| R420 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |

(OTR-1 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R421 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R422 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R431 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R432 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R433 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R501 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R502 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R503 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R504 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R505 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R506 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R507 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R508 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R509 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R510 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R511 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R512 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R513 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R514 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R515 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R516 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R531 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R532 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R533 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R534 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R535 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R536 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R537 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R538 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R555 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R556 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R557 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R558 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R559 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R560 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R561 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R562 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R563 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R564 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R565 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R566 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R567 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R568 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R569 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R570 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R587 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R588 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R589 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R590 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R591 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R592 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R593 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R594 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R601 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R602 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R603 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R604 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R605 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R606 | 1-208-863-81 | s | RES, CHIP 100 (1005) |

(OTR-1 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R607 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R608 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R609 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R610 | 1-208-875-81 | s | RES, CHIP 330 (1005) |
| R611 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R612 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R613 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R614 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R615 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R616 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R617 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R618 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R619 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R621 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R622 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R623 | 1-208-951-81 | s | RES, CHIP 470K (1005) |
| R624 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R625 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R626 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R627 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R628 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R629 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R630 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R631 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R632 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R701 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R702 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R703 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R704 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R705 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R706 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R707 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R712 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R713 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R714 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R715 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R716 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R717 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R718 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R719 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R720 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R721 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R722 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R723 | 1-208-869-81 | s | RES, CHIP 180 (1005) |
| R724 | 1-208-869-81 | s | RES, CHIP 180 (1005) |
| R725 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R726 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R727 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R728 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R729 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R730 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R731 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R732 | 1-208-913-81 | s | RES, CHIP 12K (1005) |
| R733 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R734 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R735 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R736 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R737 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R738 | 1-208-863-81 | s | RES, CHIP 100 (1005) |

(OTR-1 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R739 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R740 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R741 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R742 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R743 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R744 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R745 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R746 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R747 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R748 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R750 | 1-208-867-81 | s | RES, CHIP 150 (1005) |
| R752 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R753 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R754 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R755 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R756 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R757 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R758 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R760 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R761 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R762 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R763 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R764 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R765 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R766 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R767 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R768 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R769 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R770 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R777 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R778 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R779 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R780 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R781 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R782 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R801 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R802 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R803 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R804 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R805 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R806 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R807 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R808 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R809 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R810 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R811 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R812 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R813 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R814 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R815 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R816 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R817 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R818 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R819 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R820 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R821 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R822 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R823 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R824 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |

(OTR-1 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R825 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R826 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R827 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R828 | 1-208-869-81 | s | RES, CHIP 180 (1005) |
| R829 | 1-208-869-81 | s | RES, CHIP 180 (1005) |
| R830 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R831 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R832 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R833 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R834 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R835 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R836 | 1-208-867-81 | s | RES, CHIP 150 (1005) |
| R837 | 1-208-867-81 | s | RES, CHIP 150 (1005) |
| R838 | 1-208-867-81 | s | RES, CHIP 150 (1005) |
| R839 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R840 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R841 | 1-208-867-81 | s | RES, CHIP 150 (1005) |
| R842 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R843 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R844 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R845 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R846 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R847 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R848 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R849 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R850 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R851 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R852 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R853 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R854 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R855 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R856 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R857 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R858 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R859 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R860 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R861 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R862 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R863 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R864 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R865 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R866 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R867 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R868 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R869 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R870 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R871 | 1-208-913-81 | s | RES, CHIP 12K (1005) |
| R872 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R873 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R874 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R875 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R876 | 1-208-913-81 | s | RES, CHIP 12K (1005) |
| R877 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R878 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R879 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R880 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R881 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R882 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R883 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |

(OTR-1 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R884 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R885 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R886 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R887 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R888 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R889 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R891 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R892 | 1-208-867-81 | s | RES, CHIP 150 (1005) |
| R895 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R896 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R897 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R898 | 1-208-867-81 | s | RES, CHIP 150 (1005) |
| R901 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R902 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R903 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R904 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R906 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R907 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R908 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R909 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R910 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R911 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R912 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R913 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R914 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R915 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R916 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R917 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R920 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R921 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R922 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R923 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R924 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R925 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R926 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R927 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R928 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R929 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R930 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R931 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R932 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R933 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R934 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R935 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R936 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R937 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R938 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R939 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R940 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R941 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R942 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R943 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R944 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R945 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R946 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R947 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R948 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R949 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R950 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |

(OTR-1 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R951 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R952 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R953 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R954 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R955 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R956 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R957 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R958 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R959 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R960 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R961 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R962 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R965 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R966 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R967 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R968 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R1001 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R1002 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R1006 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R1007 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R1008 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R1009 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R1010 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R1015 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R1016 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R1017 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R1018 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R1019 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R1020 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R1021 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R1022 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R1023 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R1024 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R1025 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R1026 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R1101 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R1102 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R1103 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R1104 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R1105 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R1107 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R1108 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R1109 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R1110 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R1111 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R1113 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R1114 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R1115 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R1116 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R1117 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R1118 | 1-208-933-81 | s | RES, CHIP 82K (1005) |
| R1119 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R1120 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R1121 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R1122 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R1124 | 1-208-891-81 | s | RES, CHIP 1.5K (1005) |
| R1125 | 1-208-891-81 | s | RES, CHIP 1.5K (1005) |
| R1126 | 1-208-891-81 | s | RES, CHIP 1.5K (1005) |
| R1127 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |

(OTR-1 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R1128 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R1129 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R1130 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R1131 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R1132 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R1133 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R1134 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R1135 | 1-208-907-81 | s | RES, CHIP 6.8K (1005) |
| R1136 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R1137 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R1138 | 1-208-907-81 | s | RES, CHIP 6.8K (1005) |
| R1139 | 1-208-891-81 | s | RES, CHIP 1.5K (1005) |
| R1140 | 1-208-867-81 | s | RES, CHIP 150 (1005) |
| R1141 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R1142 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| RB200 | 1-234-380-21 | s | RES, NETWORK 47K (1005X4) |
| RB201 | 1-234-375-21 | s | RES, NETWORK 1K (1005X4) |
| RB202 | 1-234-375-21 | s | RES, NETWORK 1K (1005X4) |
| RB300 | 1-234-375-21 | s | RES, NETWORK 1K (1005X4) |
| RB301 | 1-234-375-21 | s | RES, NETWORK 1K (1005X4) |
| RB302 | 1-234-375-21 | s | RES, NETWORK 1K (1005X4) |
| RB303 | 1-234-375-21 | s | RES, NETWORK 1K (1005X4) |
| RB304 | 1-234-380-21 | s | RES, NETWORK 47K (1005X4) |
| RB305 | 1-234-380-21 | s | RES, NETWORK 47K (1005X4) |
| RB306 | 1-234-380-21 | s | RES, NETWORK 47K (1005X4) |
| RB600 | 1-234-375-21 | s | RES, NETWORK 1K (1005X4) |
| RB700 | 1-234-380-21 | s | RES, NETWORK 47K (1005X4) |
| RB800 | 1-234-380-21 | s | RES, NETWORK 47K (1005X4) |
| RB801 | 1-234-380-21 | s | RES, NETWORK 47K (1005X4) |
| RB1000 | 1-234-375-21 | s | RES, NETWORK 1K (1005X4) |
| S201 | 1-771-721-21 | s | SWITCH, TACTILE |
| S202 | 1-771-721-21 | s | SWITCH, TACTILE |
| S203 | 1-771-721-21 | s | SWITCH, TACTILE |
| S301 | 1-692-270-41 | s | SWITCH, SLIDE |
| S302 | 1-692-270-41 | s | SWITCH, SLIDE |
| S303 | 1-692-270-41 | s | SWITCH, SLIDE |
| S601 | 1-692-270-41 | s | SWITCH, SLIDE |
| X701 | 1-795-670-12 | s | OSCILLATOR, CRYSTAL (VCXO)3.3V |
| X702 | 1-795-671-12 | s | OSCILLATOR, CRYSTAL (VCXO)3.3V |
| X801 | 1-813-908-11 | s | OSCILLATOR, SAW (VCSO) |
| X802 | 1-813-909-11 | s | OSCILLATOR, SAW (VCSO) |
| X803 | 1-795-670-12 | s | OSCILLATOR, CRYSTAL (VCXO)3.3V |
| X804 | 1-795-671-12 | s | OSCILLATOR, CRYSTAL (VCXO)3.3V |

---

SDI-85 BOARD

---

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| 1pc | A-1129-305-A | s | MOUNTED CIRCUIT BOARD, SDI-85 |
| 4pcs | 3-364-941-01 | s | SCREW (+B) (2.6X5), NYLOK |
| C1 | 1-128-589-21 | s | CAP, CHIP ELECT 47MF |
| C2 | 1-126-396-21 | s | CAP, CHIP ELECT 47MF (6.3X5.7) |
| C3 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C4 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C6 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C7 | 1-126-394-21 | s | CAP, CHIP ELECT 10MF (4X5.7) |
| C10 | 1-128-589-21 | s | CAP, CHIP ELECT 47MF |
| C101 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C102 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C103 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C104 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C105 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C106 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C107 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C108 | 1-127-760-91 | s | CAP, CHIP CERAMIC 4.7MF B 2012 |
| C109 | 1-127-760-91 | s | CAP, CHIP CERAMIC 4.7MF B 2012 |
| C110 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C111 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C112 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C113 | 1-164-845-81 | s | CAP, CHIP CERAMIC 5PF CH 1005 |
| C114 | 1-164-845-81 | s | CAP, CHIP CERAMIC 5PF CH 1005 |
| C115 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C201 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C202 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C203 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C204 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C205 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C206 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C207 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C208 | 1-127-760-91 | s | CAP, CHIP CERAMIC 4.7MF B 2012 |
| C209 | 1-127-760-91 | s | CAP, CHIP CERAMIC 4.7MF B 2012 |
| C210 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C211 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C212 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C213 | 1-164-845-81 | s | CAP, CHIP CERAMIC 5PF CH 1005 |
| C214 | 1-164-845-81 | s | CAP, CHIP CERAMIC 5PF CH 1005 |
| C301 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C302 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C303 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C304 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C305 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C306 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C307 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C308 | 1-127-760-91 | s | CAP, CHIP CERAMIC 4.7MF B 2012 |
| C309 | 1-127-760-91 | s | CAP, CHIP CERAMIC 4.7MF B 2012 |
| C310 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C401 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C402 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C403 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C404 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C405 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C406 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C407 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C408 | 1-127-760-91 | s | CAP, CHIP CERAMIC 4.7MF B 2012 |
| C409 | 1-127-760-91 | s | CAP, CHIP CERAMIC 4.7MF B 2012 |
| C410 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |

(SDI-85 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| CN102 | 1-793-324-11 | o | CONNECTOR, COAXIAL (BNC TYPE) |
| CN103 | 1-793-324-11 | o | CONNECTOR, COAXIAL (BNC TYPE) |
| CN104 | 1-793-324-11 | o | CONNECTOR, COAXIAL (BNC TYPE) |
| CN105 | 1-793-324-11 | o | CONNECTOR, COAXIAL (BNC TYPE) |
| E1 | 1-535-877-22 | s | CHIP, CHECKER |
| E2 | 1-535-877-22 | s | CHIP, CHECKER |
| FB101 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB102 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB201 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB202 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB301 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB401 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| IC1 | 8-759-327-01 | s | IC NJM062V(TE2) |
| IC2 | 6-704-976-01 | s | IC ADR381ARTZ-REEL7 |
| IC101 | 6-702-620-01 | s | IC GS1524-CKDE3 |
| IC102 | 6-701-084-01 | s | IC MC10EP57DTR2 |
| IC103 | 8-759-471-91 | s | IC 74VHC04MTCX |
| IC201 | 6-702-620-01 | s | IC GS1524-CKDE3 |
| IC202 | 6-701-084-01 | s | IC MC10EP57DTR2 |
| IC301 | 6-702-620-01 | s | IC GS1524-CKDE3 |
| IC401 | 6-702-620-01 | s | IC GS1524-CKDE3 |
| L1 | 1-416-344-21 | s | COIL, CHOKE 10UH |
| L2 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L101 | 1-414-461-41 | s | INDUCTOR, CHIP (K) 6.8NH |
| L201 | 1-414-461-41 | s | INDUCTOR, CHIP (K) 6.8NH |
| L301 | 1-414-461-41 | s | INDUCTOR, CHIP (K) 6.8NH |
| L401 | 1-414-461-41 | s | INDUCTOR, CHIP (K) 6.8NH |
| Q1 | 8-729-209-73 | s | TRANSISTOR 2SA1213Y-TE12L |
| Q2 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q3 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q101 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q102 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q201 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q202 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| R1 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R2 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R3 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R4 | 1-208-907-81 | s | RES, CHIP 6.8K (1005) |
| R5 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R6 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R7 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R8 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R9 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R10 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R11 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R12 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R13 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R101 | 1-208-860-81 | s | RES, CHIP 75 (1005) |
| R102 | 1-208-860-81 | s | RES, CHIP 75 (1005) |
| R103 | 1-208-860-81 | s | RES, CHIP 75 (1005) |
| R104 | 1-208-860-81 | s | RES, CHIP 75 (1005) |
| R105 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R106 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R107 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R108 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R109 | 1-208-856-81 | s | RES, CHIP 51 (1005) |

(SDI-85 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R110 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R111 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R112 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R113 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R114 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R115 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R116 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R117 | 1-208-931-81 | s | RES, CHIP 68K (1005) |
| R118 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R119 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R120 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R121 | 1-208-931-81 | s | RES, CHIP 68K (1005) |
| R122 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R123 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R124 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R125 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R126 | 1-220-878-81 | s | RES, CHIP 22 (1005) |
| R127 | 1-220-878-81 | s | RES, CHIP 22 (1005) |
| R133 | 1-208-886-81 | s | RES, CHIP 910 (1005) |
| R134 | 1-220-872-81 | s | RES, CHIP 12 (1005) |
| R135 | 1-208-886-81 | s | RES, CHIP 910 (1005) |
| R201 | 1-208-860-81 | s | RES, CHIP 75 (1005) |
| R202 | 1-208-860-81 | s | RES, CHIP 75 (1005) |
| R203 | 1-208-860-81 | s | RES, CHIP 75 (1005) |
| R204 | 1-208-860-81 | s | RES, CHIP 75 (1005) |
| R205 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R206 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R207 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R208 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R209 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R210 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R211 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R212 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R213 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R214 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R215 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R216 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R217 | 1-208-931-81 | s | RES, CHIP 68K (1005) |
| R218 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R219 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R220 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R221 | 1-208-931-81 | s | RES, CHIP 68K (1005) |
| R222 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R223 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R224 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R225 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R226 | 1-220-878-81 | s | RES, CHIP 22 (1005) |
| R227 | 1-220-878-81 | s | RES, CHIP 22 (1005) |
| R228 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R229 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R233 | 1-208-886-81 | s | RES, CHIP 910 (1005) |
| R234 | 1-220-872-81 | s | RES, CHIP 12 (1005) |
| R235 | 1-208-886-81 | s | RES, CHIP 910 (1005) |
| R301 | 1-208-860-81 | s | RES, CHIP 75 (1005) |
| R302 | 1-208-860-81 | s | RES, CHIP 75 (1005) |
| R303 | 1-208-860-81 | s | RES, CHIP 75 (1005) |
| R304 | 1-208-860-81 | s | RES, CHIP 75 (1005) |
| R305 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R306 | 1-208-911-81 | s | RES, CHIP 10K (1005) |

(SDI-85 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R307 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R308 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R309 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R310 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R311 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R333 | 1-208-886-81 | s | RES, CHIP 910 (1005) |
| R334 | 1-220-872-81 | s | RES, CHIP 12 (1005) |
| R335 | 1-208-886-81 | s | RES, CHIP 910 (1005) |
| R401 | 1-208-860-81 | s | RES, CHIP 75 (1005) |
| R402 | 1-208-860-81 | s | RES, CHIP 75 (1005) |
| R403 | 1-208-860-81 | s | RES, CHIP 75 (1005) |
| R404 | 1-208-860-81 | s | RES, CHIP 75 (1005) |
| R405 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R406 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R407 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R408 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R409 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R410 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R411 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R433 | 1-208-886-81 | s | RES, CHIP 910 (1005) |
| R434 | 1-220-872-81 | s | RES, CHIP 12 (1005) |
| R435 | 1-208-886-81 | s | RES, CHIP 910 (1005) |

---

SDI-86G BOARD

---

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| 1pc | A-1161-074-A | s | MOUNTED CIRCUIT BOARD, SDI-86G |
| 4pcs | 3-364-941-01 | s | SCREW (+B) (2.6X5), NYLOK |
| C1 | 1-128-589-21 | s | CAP, CHIP ELECT 47MF |
| C2 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C4 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C6 | 1-126-394-21 | s | CAP, CHIP ELECT 10MF (4X5.7) |
| C7 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C8 | 1-128-589-21 | s | CAP, CHIP ELECT 47MF |
| C9 | 1-126-396-21 | s | CAP, CHIP ELECT 47MF (6.3X5.7) |
| C10 | 1-126-396-21 | s | CAP, CHIP ELECT 47MF (6.3X5.7) |
| C11 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C12 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C15 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C17 | 1-126-394-21 | s | CAP, CHIP ELECT 10MF (4X5.7) |
| C18 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C19 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C20 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C21 | 1-128-589-21 | s | CAP, CHIP ELECT 47MF |
| C22 | 1-128-589-21 | s | CAP, CHIP ELECT 47MF |
| C23 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C101 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C102 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C103 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C104 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C105 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C106 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C107 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C108 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C109 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C110 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C111 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C112 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C113 | 1-164-866-81 | s | CAP, CHIP CERAMIC 47PF CH 1005 |
| C114 | 1-126-394-21 | s | CAP, CHIP ELECT 10MF (4X5.7) |
| C115 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C116 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C117 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C118 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C119 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C120 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C121 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C122 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C123 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C124 | 1-164-845-81 | s | CAP, CHIP CERAMIC 5PF CH 1005 |
| C125 | 1-164-845-81 | s | CAP, CHIP CERAMIC 5PF CH 1005 |
| C127 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C128 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C201 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C202 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C203 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C204 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C205 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C206 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C207 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C208 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C209 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C210 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C211 | 1-164-866-81 | s | CAP, CHIP CERAMIC 47PF CH 1005 |

(SDI-86G BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C212 | 1-126-394-21 | s | CAP, CHIP ELECT 10MF (4X5.7) |
| C214 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C215 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C216 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C217 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C218 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C219 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C220 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C221 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C222 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C223 | 1-164-845-81 | s | CAP, CHIP CERAMIC 5PF CH 1005 |
| C224 | 1-164-845-81 | s | CAP, CHIP CERAMIC 5PF CH 1005 |
| C225 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C226 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C301 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C302 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C303 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C401 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C402 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C403 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C501 | 1-100-620-91 | s | CAP, CHIP CERAMIC 47MF B(3225) |
| C502 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C503 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C505 | 1-164-845-81 | s | CAP, CHIP CERAMIC 5PF CH 1005 |
| C506 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C507 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C508 | 1-128-589-21 | s | CAP, CHIP ELECT 47MF |
| C509 | 1-128-589-21 | s | CAP, CHIP ELECT 47MF |
| C510 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C511 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C601 | 1-100-620-91 | s | CAP, CHIP CERAMIC 47MF B(3225) |
| C602 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C603 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C605 | 1-164-845-81 | s | CAP, CHIP CERAMIC 5PF CH 1005 |
| C606 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C607 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C608 | 1-128-589-21 | s | CAP, CHIP ELECT 47MF |
| C609 | 1-128-589-21 | s | CAP, CHIP ELECT 47MF |
| C610 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C611 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C701 | 1-100-620-91 | s | CAP, CHIP CERAMIC 47MF B(3225) |
| C702 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C703 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C801 | 1-100-620-91 | s | CAP, CHIP CERAMIC 47MF B(3225) |
| C802 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C803 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C904 | 1-128-589-21 | s | CAP, CHIP ELECT 47MF |
| C905 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C906 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C907 | 1-128-589-21 | s | CAP, CHIP ELECT 47MF |
| C908 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C909 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| CN102 | 1-793-324-11 | o | CONNECTOR, COAXIAL (BNC TYPE) |
| CN103 | 1-793-324-11 | o | CONNECTOR, COAXIAL (BNC TYPE) |
| CN104 | 1-793-324-11 | o | CONNECTOR, COAXIAL (BNC TYPE) |
| CN105 | 1-793-324-11 | o | CONNECTOR, COAXIAL (BNC TYPE) |
| CN108 | 1-778-647-31 | s | CONNECTOR, FFC/FPC(ZIF) ST 15P |
| D1 | 8-719-017-03 | s | DIODE 02DZ4.7-TPH3 |

(SDI-86G BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| D2 | 8-719-017-03 | s | DIODE 02DZ4.7-TPH3 |
| D101 | 8-719-421-45 | s | DIODE MA80WK-TX |
| D102 | 8-719-421-45 | s | DIODE MA80WK-TX |
| D103 | 8-719-421-45 | s | DIODE MA80WK-TX |
| D201 | 8-719-421-45 | s | DIODE MA80WK-TX |
| D202 | 8-719-421-45 | s | DIODE MA80WK-TX |
| D203 | 8-719-421-45 | s | DIODE MA80WK-TX |
| D301 | 8-719-421-45 | s | DIODE MA80WK-TX |
| D302 | 8-719-421-45 | s | DIODE MA80WK-TX |
| D303 | 8-719-421-45 | s | DIODE MA80WK-TX |
| D401 | 8-719-421-45 | s | DIODE MA80WK-TX |
| D402 | 8-719-421-45 | s | DIODE MA80WK-TX |
| D403 | 8-719-421-45 | s | DIODE MA80WK-TX |
| E1 | 1-535-877-22 | s | CHIP, CHECKER |
| E2 | 1-535-877-22 | s | CHIP, CHECKER |
| FB101 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB102 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB103 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB201 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB202 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB203 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB301 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB302 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB401 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB402 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| IC1 | 8-759-327-01 | s | IC NJM062V(TE2) |
| IC2 | 8-759-327-01 | s | IC NJM062V(TE2) |
| IC3 | 6-704-976-01 | s | IC ADR381ARTZ-REEL7 |
| IC4 | 8-759-338-95 | s | IC NJM2903V(TE2) |
| IC101 | 8-752-080-61 | s | IC CXB1340N |
| IC102 | 8-759-523-02 | s | IC TC74HC4053AFT(EL) |
| IC201 | 8-752-080-61 | s | IC CXB1340N |
| IC202 | 8-759-523-02 | s | IC TC74HC4053AFT(EL) |
| IC501 | 8-759-561-46 | s | IC AD8014ARTZ-REEL7 |
| IC502 | 8-759-523-02 | s | IC TC74HC4053AFT(EL) |
| IC601 | 8-759-561-46 | s | IC AD8014ARTZ-REEL7 |
| IC602 | 8-759-523-02 | s | IC TC74HC4053AFT(EL) |
| IC902 | 8-759-561-46 | s | IC AD8014ARTZ-REEL7 |
| IC903 | 8-759-561-46 | s | IC AD8014ARTZ-REEL7 |
| L1 | 1-416-344-21 | s | COIL, CHOKE 10UH |
| L2 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L3 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L101 | 1-414-465-41 | s | INDUCTOR, CHIP (J) 15NH |
| L102 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L103 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L201 | 1-414-465-41 | s | INDUCTOR, CHIP (J) 15NH |
| L203 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L204 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L301 | 1-414-465-41 | s | INDUCTOR, CHIP (J) 15NH |
| L401 | 1-414-465-41 | s | INDUCTOR, CHIP (J) 15NH |
| L501 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L502 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L601 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L602 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L901 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L902 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| Q1 | 8-729-209-73 | s | TRANSISTOR 2SA1213Y-TE12L |

(SDI-86G BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| Q2 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q3 | 8-729-209-73 | s | TRANSISTOR 2SA1213Y-TE12L |
| Q4 | 8-729-209-77 | s | TRANSISTOR 2SC2873Y-TE12L |
| Q5 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q101 | 8-729-111-97 | s | TRANSISTOR 2SC3356-T1K |
| Q102 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q103 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q104 | 8-729-111-97 | s | TRANSISTOR 2SC3356-T1K |
| Q201 | 8-729-111-97 | s | TRANSISTOR 2SC3356-T1K |
| Q202 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q203 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q204 | 8-729-111-97 | s | TRANSISTOR 2SC3356-T1K |
| Q301 | 8-729-111-97 | s | TRANSISTOR 2SC3356-T1K |
| Q302 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q303 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q401 | 8-729-111-97 | s | TRANSISTOR 2SC3356-T1K |
| Q402 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q403 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q501 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q502 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q503 | 8-729-928-25 | s | TRANSISTOR 2SA1774TL-QR |
| Q504 | 8-729-928-25 | s | TRANSISTOR 2SA1774TL-QR |
| Q505 | 8-729-928-25 | s | TRANSISTOR 2SA1774TL-QR |
| Q506 | 8-729-928-25 | s | TRANSISTOR 2SA1774TL-QR |
| Q507 | 8-729-928-28 | s | TRANSISTOR DTA144EE-TL |
| Q508 | 8-729-928-82 | s | TRANSISTOR DTC144EE-TL |
| Q509 | 8-729-928-28 | s | TRANSISTOR DTA144EE-TL |
| Q510 | 8-729-928-82 | s | TRANSISTOR DTC144EE-TL |
| Q511 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q512 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q513 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q514 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q601 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q602 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q603 | 8-729-928-25 | s | TRANSISTOR 2SA1774TL-QR |
| Q604 | 8-729-928-25 | s | TRANSISTOR 2SA1774TL-QR |
| Q605 | 8-729-928-25 | s | TRANSISTOR 2SA1774TL-QR |
| Q606 | 8-729-928-25 | s | TRANSISTOR 2SA1774TL-QR |
| Q607 | 8-729-928-28 | s | TRANSISTOR DTA144EE-TL |
| Q608 | 8-729-928-82 | s | TRANSISTOR DTC144EE-TL |
| Q609 | 8-729-928-28 | s | TRANSISTOR DTA144EE-TL |
| Q610 | 8-729-928-82 | s | TRANSISTOR DTC144EE-TL |
| Q611 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q612 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q613 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q614 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q701 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q702 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q703 | 8-729-928-25 | s | TRANSISTOR 2SA1774TL-QR |
| Q704 | 8-729-928-25 | s | TRANSISTOR 2SA1774TL-QR |
| Q705 | 8-729-928-25 | s | TRANSISTOR 2SA1774TL-QR |
| Q706 | 8-729-928-25 | s | TRANSISTOR 2SA1774TL-QR |
| Q707 | 8-729-928-28 | s | TRANSISTOR DTA144EE-TL |
| Q708 | 8-729-928-82 | s | TRANSISTOR DTC144EE-TL |
| Q709 | 8-729-928-28 | s | TRANSISTOR DTA144EE-TL |
| Q710 | 8-729-928-82 | s | TRANSISTOR DTC144EE-TL |
| Q801 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q802 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q803 | 8-729-928-25 | s | TRANSISTOR 2SA1774TL-QR |

(SDI-86G BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| Q804 | 8-729-928-25 | s | TRANSISTOR 2SA1774TL-QR |
| Q805 | 8-729-928-25 | s | TRANSISTOR 2SA1774TL-QR |
| Q806 | 8-729-928-25 | s | TRANSISTOR 2SA1774TL-QR |
| Q807 | 8-729-928-28 | s | TRANSISTOR DTA144EE-TL |
| Q808 | 8-729-928-82 | s | TRANSISTOR DTC144EE-TL |
| Q809 | 8-729-928-28 | s | TRANSISTOR DTA144EE-TL |
| Q810 | 8-729-928-82 | s | TRANSISTOR DTC144EE-TL |
| R1 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R2 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R3 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R4 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R5 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R6 | 1-208-931-81 | s | RES, CHIP 68K (1005) |
| R7 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R8 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R9 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R10 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R11 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R12 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R13 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R14 | 1-208-931-81 | s | RES, CHIP 68K (1005) |
| R15 | 1-208-931-81 | s | RES, CHIP 68K (1005) |
| R16 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R17 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R18 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R19 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R20 | 1-208-907-81 | s | RES, CHIP 6.8K (1005) |
| R21 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R22 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R23 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R24 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R25 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R26 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R27 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R28 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R29 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R30 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R101 | 1-208-860-81 | s | RES, CHIP 75 (1005) |
| R102 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R103 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R104 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R105 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R106 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R107 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R108 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R109 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R110 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R111 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R112 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R113 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R114 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R115 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R116 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R117 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R118 | 1-220-882-81 | s | RES, CHIP 33 (1005) |
| R119 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R120 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R121 | 1-208-911-81 | s | RES, CHIP 10K (1005) |

(SDI-86G BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R122 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R123 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R124 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R125 | 1-208-860-81 | s | RES, CHIP 75 (1005) |
| R126 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R127 | 1-208-875-81 | s | RES, CHIP 330 (1005) |
| R128 | 1-208-875-81 | s | RES, CHIP 330 (1005) |
| R129 | 1-220-878-81 | s | RES, CHIP 22 (1005) |
| R130 | 1-220-878-81 | s | RES, CHIP 22 (1005) |
| R131 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R132 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R136 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R137 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R138 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R139 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R201 | 1-208-860-81 | s | RES, CHIP 75 (1005) |
| R202 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R203 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R204 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R205 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R206 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R207 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R208 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R209 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R210 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R211 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R212 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R213 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R214 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R215 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R216 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R217 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R218 | 1-220-882-81 | s | RES, CHIP 33 (1005) |
| R219 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R220 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R221 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R222 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R223 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R224 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R225 | 1-208-860-81 | s | RES, CHIP 75 (1005) |
| R226 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R227 | 1-208-875-81 | s | RES, CHIP 330 (1005) |
| R228 | 1-208-875-81 | s | RES, CHIP 330 (1005) |
| R229 | 1-220-878-81 | s | RES, CHIP 22 (1005) |
| R230 | 1-220-878-81 | s | RES, CHIP 22 (1005) |
| R231 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R232 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R233 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R234 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R301 | 1-208-860-81 | s | RES, CHIP 75 (1005) |
| R302 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R303 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R304 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R305 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R306 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R307 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R308 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R309 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R310 | 1-208-919-81 | s | RES, CHIP 22K (1005) |

(SDI-86G BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R311 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R312 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R313 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R401 | 1-208-860-81 | s | RES, CHIP 75 (1005) |
| R402 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R403 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R404 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R405 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R406 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R407 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R408 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R409 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R410 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R411 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R412 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R413 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R501 | 1-208-867-81 | s | RES, CHIP 150 (1005) |
| R502 | 1-208-867-81 | s | RES, CHIP 150 (1005) |
| R503 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R504 | 1-208-899-81 | s | RES, CHIP 3.3K (1005) |
| R505 | 1-208-943-81 | s | RES, CHIP 220K (1005) |
| R506 | 1-208-899-81 | s | RES, CHIP 3.3K (1005) |
| R507 | 1-208-899-81 | s | RES, CHIP 3.3K (1005) |
| R508 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R509 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R510 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R511 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R512 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R513 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R514 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R515 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R516 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R517 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R518 | 1-208-899-81 | s | RES, CHIP 3.3K (1005) |
| R519 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R520 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R521 | 1-208-875-81 | s | RES, CHIP 330 (1005) |
| R522 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R523 | 1-208-891-81 | s | RES, CHIP 1.5K (1005) |
| R524 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R525 | 1-208-875-81 | s | RES, CHIP 330 (1005) |
| R526 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R527 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R528 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R529 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R530 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R601 | 1-208-867-81 | s | RES, CHIP 150 (1005) |
| R602 | 1-208-867-81 | s | RES, CHIP 150 (1005) |
| R603 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R604 | 1-208-899-81 | s | RES, CHIP 3.3K (1005) |
| R605 | 1-208-943-81 | s | RES, CHIP 220K (1005) |
| R606 | 1-208-899-81 | s | RES, CHIP 3.3K (1005) |
| R607 | 1-208-899-81 | s | RES, CHIP 3.3K (1005) |
| R608 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R609 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R610 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R611 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R612 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R613 | 1-208-911-81 | s | RES, CHIP 10K (1005) |

(SDI-86G BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R614 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R615 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R616 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R617 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R618 | 1-208-899-81 | s | RES, CHIP 3.3K (1005) |
| R619 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R620 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R621 | 1-208-875-81 | s | RES, CHIP 330 (1005) |
| R622 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R623 | 1-208-891-81 | s | RES, CHIP 1.5K (1005) |
| R624 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R625 | 1-208-875-81 | s | RES, CHIP 330 (1005) |
| R626 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R627 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R628 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R629 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R630 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R701 | 1-208-867-81 | s | RES, CHIP 150 (1005) |
| R702 | 1-208-867-81 | s | RES, CHIP 150 (1005) |
| R703 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R704 | 1-208-899-81 | s | RES, CHIP 3.3K (1005) |
| R705 | 1-208-943-81 | s | RES, CHIP 220K (1005) |
| R706 | 1-208-899-81 | s | RES, CHIP 3.3K (1005) |
| R707 | 1-208-899-81 | s | RES, CHIP 3.3K (1005) |
| R708 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R709 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R710 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R711 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R712 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R713 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R801 | 1-208-867-81 | s | RES, CHIP 150 (1005) |
| R802 | 1-208-867-81 | s | RES, CHIP 150 (1005) |
| R803 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R804 | 1-208-899-81 | s | RES, CHIP 3.3K (1005) |
| R805 | 1-208-943-81 | s | RES, CHIP 220K (1005) |
| R806 | 1-208-899-81 | s | RES, CHIP 3.3K (1005) |
| R807 | 1-208-899-81 | s | RES, CHIP 3.3K (1005) |
| R808 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R809 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R810 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R811 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R812 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R813 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R913 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R914 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R915 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R916 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R917 | 1-208-875-81 | s | RES, CHIP 330 (1005) |
| R918 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R919 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R920 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R921 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R922 | 1-208-875-81 | s | RES, CHIP 330 (1005) |

---

SDP-15 BOARD

---

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| 1pc | A-1206-291-A | s | MOUNTED CIRCUIT BOARD, SDP-15 |
| 2pcs | 7-682-947-01 | s | SCREW +PSW 3X6 |
| C1 | 1-165-872-21 | s | CAP, ELECT 47MF (5.0X6.5) |
| C4 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C6 | 1-165-872-21 | s | CAP, ELECT 47MF (5.0X6.5) |
| C7 | 1-165-872-21 | s | CAP, ELECT 47MF (5.0X6.5) |
| C9 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C11 | 1-126-394-21 | s | CAP, CHIP ELECT 10MF (4X5.7) |
| C13 | 1-165-872-21 | s | CAP, ELECT 47MF (5.0X6.5) |
| C14 | 1-165-872-21 | s | CAP, ELECT 47MF (5.0X6.5) |
| C16 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C17 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C20 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C22 | 1-126-394-21 | s | CAP, CHIP ELECT 10MF (4X5.7) |
| C23 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C24 | 1-112-015-91 | s | CAP, CHIP CERAMIC 47MF B 3225 |
| C25 | 1-112-015-91 | s | CAP, CHIP CERAMIC 47MF B 3225 |
| C26 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C29 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C30 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C31 | 1-128-416-21 | s | CAP, CHIP ELECT 100MF |
| C32 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C33 | 1-119-923-81 | s | CAP, CERAMIC 0.047MF B 1005 |
| C34 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C35 | 1-119-923-81 | s | CAP, CERAMIC 0.047MF B 1005 |
| C36 | 1-112-015-91 | s | CAP, CHIP CERAMIC 47MF B 3225 |
| C37 | 1-112-015-91 | s | CAP, CHIP CERAMIC 47MF B 3225 |
| C38 | 1-107-819-81 | s | CAP,CHIP CERAMIC 22000PF B1005 |
| C39 | 1-164-936-81 | s | CAP, CHIP CERAMIC 680PF B 1005 |
| C40 | 1-112-015-91 | s | CAP, CHIP CERAMIC 47MF B 3225 |
| C41 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C42 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C43 | 1-165-872-21 | s | CAP, ELECT 47MF (5.0X6.5) |
| C44 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C45 | 1-119-923-81 | s | CAP, CERAMIC 0.047MF B 1005 |
| C46 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C47 | 1-119-923-81 | s | CAP, CERAMIC 0.047MF B 1005 |
| C48 | 1-112-015-91 | s | CAP, CHIP CERAMIC 47MF B 3225 |
| C49 | 1-112-015-91 | s | CAP, CHIP CERAMIC 47MF B 3225 |
| C50 | 1-107-819-81 | s | CAP,CHIP CERAMIC 22000PF B1005 |
| C51 | 1-164-936-81 | s | CAP, CHIP CERAMIC 680PF B 1005 |
| C52 | 1-112-015-91 | s | CAP, CHIP CERAMIC 47MF B 3225 |
| C53 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C55 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C56 | 1-165-872-21 | s | CAP, ELECT 47MF (5.0X6.5) |
| C57 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C58 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C101 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C102 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C103 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C104 | 1-126-394-21 | s | CAP, CHIP ELECT 10MF (4X5.7) |
| C105 | 1-126-394-21 | s | CAP, CHIP ELECT 10MF (4X5.7) |
| C106 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C107 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C108 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C109 | 1-125-891-91 | s | CAP, CHIP CERAMIC0.47MF B 1608 |
| C110 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C111 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |

(SDP-15 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C112 | 1-125-891-91 | s | CAP, CHIP CERAMIC0.47MF B 1608 |
| C113 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C114 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C115 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C116 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C117 | 1-164-850-81 | s | CAP, CHIP CERAMIC 10PF CH 1005 |
| C118 | 1-164-850-81 | s | CAP, CHIP CERAMIC 10PF CH 1005 |
| C119 | 1-164-937-81 | s | CAP, CHIPCERAMIC 1000PF B 1005 |
| C120 | 1-164-937-81 | s | CAP, CHIPCERAMIC 1000PF B 1005 |
| C121 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C122 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C123 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C124 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C125 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C221 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C225 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C226 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C227 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C228 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C229 | 1-164-939-81 | s | CAP, CHIPCERAMIC 2200PF B 1005 |
| C230 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C231 | 1-164-939-81 | s | CAP, CHIPCERAMIC 2200PF B 1005 |
| C232 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C233 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C234 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C235 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C236 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C237 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C238 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C239 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C246 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C248 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C249 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C250 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C251 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C252 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C253 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C254 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C255 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C256 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C257 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C258 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C259 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C260 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C261 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C262 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C263 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C264 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C265 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C266 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C267 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C268 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C269 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C270 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C271 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C301 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C302 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C303 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C305 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |

(SDP-15 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C308 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C309 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C313 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C314 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C316 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C317 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C319 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C320 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C321 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C322 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C323 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C324 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C325 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C326 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C327 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C328 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C329 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C330 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C331 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C332 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C333 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C334 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C335 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C336 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C337 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C338 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C339 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C340 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C341 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C342 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C343 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C344 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C345 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C346 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C347 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C348 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C349 | 1-164-939-81 | s | CAP, CHIPCERAMIC 2200PF B 1005 |
| C350 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C351 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C354 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C355 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C356 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C357 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C358 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C359 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C360 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C361 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C362 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C363 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C365 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C366 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C368 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C369 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C401 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C402 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C403 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C408 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C410 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C412 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |

(SDP-15 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C413 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C414 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C415 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C416 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C417 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C418 | 1-164-939-81 | s | CAP, CHIPCERAMIC 2200PF B 1005 |
| C419 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C420 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C423 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C424 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C425 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C426 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C428 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C429 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C430 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C431 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C432 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C433 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C436 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C437 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C439 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C440 | 1-128-416-21 | s | CAP, CHIP ELECT 100MF |
| C447 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C448 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C449 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C450 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C451 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C452 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C453 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C454 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C455 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C456 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C457 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C459 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C460 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C461 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| C462 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| C466 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| C467 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| C471 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| C472 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| C476 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| C477 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| C481 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C483 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| C484 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| C488 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C489 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C502 | 1-112-015-91 | s | CAP, CHIP CERAMIC 47MF B 3225 |
| C503 | 1-112-015-91 | s | CAP, CHIP CERAMIC 47MF B 3225 |
| C701 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C702 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C703 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C704 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C705 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C706 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C707 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C708 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C709 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |

(SDP-15 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C710 | 1-125-891-91 | s | CAP, CHIP CERAMIC0.47MF B 1608 |
| C711 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C712 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C713 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C715 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C717 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C718 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C719 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C720 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C721 | 1-164-939-81 | s | CAP, CHIPCERAMIC 2200PF B 1005 |
| C722 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C723 | 1-164-939-81 | s | CAP, CHIPCERAMIC 2200PF B 1005 |
| C724 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C725 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C726 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C727 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C728 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C729 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C731 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C732 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| CN103 | 1-695-480-21 | o | PIN, CONNECTOR (PC BOARD) 2P |
| CN104 | 1-770-470-21 | o | PIN, CONNECTOR (PC BOARD) 6P |
| CN105 | 1-815-921-11 | s | JACK, MODULAR |
| CN301 | 1-764-080-21 | o | PIN, CONNECTOR (PC BOARD) 8P |
| CN401 | 1-785-553-21 | o | CONNECTOR, BOARD TO BOARD 120P |
| D1 | 8-719-017-03 | s | DIODE 02DZ4.7-TPH3 |
| D2 | 8-719-017-03 | s | DIODE 02DZ4.7-TPH3 |
| D3 | 8-719-017-03 | s | DIODE 02DZ4.7-TPH3 |
| D4 | 8-719-017-03 | s | DIODE 02DZ4.7-TPH3 |
| D5 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D101 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D102 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D103 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D401 | 8-719-989-77 | s | DIODE SC802-04-TE12RA |
| D402 | 8-719-989-77 | s | DIODE SC802-04-TE12RA |
| E1 | 1-535-877-22 | s | CHIP, CHECKER |
| E2 | 1-535-877-22 | s | CHIP, CHECKER |
| E3 | 1-535-877-22 | s | CHIP, CHECKER |
| FB1 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB2 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB3 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB4 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB5 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB6 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB101 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB203 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB204 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB205 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB206 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB207 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB208 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB209 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB210 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB211 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB301 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB302 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB303 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB305 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |

(SDP-15 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| FB306 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB307 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB308 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB309 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB311 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB401 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB402 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB403 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB404 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB405 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB407 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB408 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB409 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB410 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB412 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB414 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB701 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB702 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB703 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB704 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB705 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB707 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB708 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB709 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB710 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB711 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| IC1 | 8-759-327-01 | s | IC NJM062V(TE2) |
| IC2 | 8-759-327-01 | s | IC NJM062V(TE2) |
| IC3 | 6-704-976-01 | s | IC ADR381ARTZ-REEL7 |
| IC4 | 8-759-327-01 | s | IC NJM062V(TE2) |
| IC5 | 6-706-482-01 | s | IC TC7SH00FU(T5RSOYJF) |
| IC6 | 6-701-572-01 | s | IC TPS54610PWPR |
| IC7 | 6-701-572-01 | s | IC TPS54610PWPR |
| IC9 | 8-759-338-95 | s | IC NJM2903V(TE2) |
| IC10 | 8-759-338-95 | s | IC NJM2903V(TE2) |
| IC101 | 8-759-338-95 | s | IC NJM2903V(TE2) |
| IC102 | 8-759-338-95 | s | IC NJM2903V(TE2) |
| IC103 | 8-759-471-85 | s | IC 74VHC00MTCX |
| IC104 | 8-759-327-01 | s | IC NJM062V(TE2) |
| IC105 | 8-759-327-01 | s | IC NJM062V(TE2) |
| IC106 | 8-759-346-27 | s | IC LM45BIM3X |
| IC107 | 8-759-523-01 | s | IC TC74HC4052AFT(EL) |
| IC108 | 6-708-346-01 | s | IC DAC7512N |
| IC201 | 6-709-052-01 | s | IC GS1561-CFE3 |
| IC204 | 8-759-472-43 | s | IC 74VHC245MTCX |
| IC205 | 8-759-592-44 | s | IC TC7SZ04FU(TE85R) |
| IC301 | 6-700-804-01 | s | IC SN74LVC574APWR |
| IC302 | 6-700-804-01 | s | IC SN74LVC574APWR |
| IC303 | 6-700-804-01 | s | IC SN74LVC574APWR |
| IC304 | 8-759-592-44 | s | IC TC7SZ04FU(TE85R) |
| IC305 | 8-759-472-43 | s | IC 74VHC245MTCX |
| IC306 | 8-759-669-43 | s | IC SN74LVC157APWR-12 |
| IC307 | 6-707-945-01 | s | IC EPC4QC100N |
| IC309 | 8-759-363-26 | s | IC RN5VD28AA-TL-FA |
| IC310 | 8-759-471-96 | s | IC 74VHC08MTCX |
| IC319 | 8-759-592-44 | s | IC TC7SZ04FU(TE85R) |
| IC320 | 8-759-592-44 | s | IC TC7SZ04FU(TE85R) |
| IC321 | 8-759-592-44 | s | IC TC7SZ04FU(TE85R) |

(SDP-15 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| IC401 | 6-701-084-01 | s | IC MC10EP57DTR2 |
| IC408 | 6-702-535-01 | s | IC MC100LVEL11DTR2 |
| IC418 | 6-706-487-01 | s | IC TC7SH08FU(T5RSOYJF) |
| IC703 | 6-706-483-01 | s | IC TC7SH02FU(T5RSOYJF) |
| IC704 | 8-759-592-49 | s | IC TC7SZ125FU(TE85R) |
| IC705 | 6-706-482-01 | s | IC TC7SH00FU(T5RSOYJF) |
| IC706 | 8-759-592-44 | s | IC TC7SZ04FU(TE85R) |
| JC101 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| JC102 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| JC401 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| JC402 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| JC403 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| JC404 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| L1 | 1-457-205-21 | s | COIL, CHOKE (SMD) 3.3UH |
| L2 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L3 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L4 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L5 | 1-416-344-21 | s | COIL, CHOKE 10UH |
| L6 | 1-416-344-21 | s | COIL, CHOKE 10UH |
| L7 | 1-416-948-21 | s | COIL, CHOKE 10UH |
| L101 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L203 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L204 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L205 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L301 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L302 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L401 | 1-469-529-21 | s | INDUCTOR, (SMD) 10UH |
| L402 | 1-416-344-21 | s | COIL, CHOKE 10UH |
| L403 | 1-416-344-21 | s | COIL, CHOKE 10UH |
| L701 | 1-414-461-41 | s | INDUCTOR, CHIP (K) 6.8NH |
| Q1 | 8-729-209-73 | s | TRANSISTOR 2SA1213Y-TE12L |
| Q2 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q3 | 8-729-209-73 | s | TRANSISTOR 2SA1213Y-TE12L |
| Q4 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q5 | 8-729-928-25 | s | TRANSISTOR 2SA1774TL-QR |
| Q6 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q7 | 8-729-928-25 | s | TRANSISTOR 2SA1774TL-QR |
| Q8 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q101 | 8-729-928-25 | s | TRANSISTOR 2SA1774TL-QR |
| Q102 | 8-729-928-25 | s | TRANSISTOR 2SA1774TL-QR |
| Q103 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q104 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q105 | 8-729-928-25 | s | TRANSISTOR 2SA1774TL-QR |
| Q106 | 8-729-928-25 | s | TRANSISTOR 2SA1774TL-QR |
| Q401 | 8-729-928-28 | s | TRANSISTOR DTA144EE-TL |
| Q402 | 8-729-928-82 | s | TRANSISTOR DTC144EE-TL |
| Q403 | 8-729-928-82 | s | TRANSISTOR DTC144EE-TL |
| Q404 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q405 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q406 | 8-729-928-28 | s | TRANSISTOR DTA144EE-TL |
| Q701 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q702 | 8-729-928-25 | s | TRANSISTOR 2SA1774TL-QR |
| Q703 | 8-729-928-28 | s | TRANSISTOR DTA144EE-TL |
| Q704 | 8-729-928-82 | s | TRANSISTOR DTC144EE-TL |
| Q705 | 8-729-041-23 | s | TRANSISTOR NDS356AP |
| Q706 | 8-729-041-23 | s | TRANSISTOR NDS356AP |

(SDP-15 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R1 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R2 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R3 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R4 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R5 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R6 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R7 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R8 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R9 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R10 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R11 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R12 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R13 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R14 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R15 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R16 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R17 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R18 | 1-208-931-81 | s | RES, CHIP 68K (1005) |
| R19 | 1-208-931-81 | s | RES, CHIP 68K (1005) |
| R20 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R21 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R22 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R23 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R24 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R25 | 1-208-931-81 | s | RES, CHIP 68K (1005) |
| R26 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R27 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R28 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R29 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R30 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R31 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R32 | 1-208-891-81 | s | RES, CHIP 1.5K (1005) |
| R33 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R34 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R35 | 1-208-907-81 | s | RES, CHIP 6.8K (1005) |
| R36 | 1-208-907-81 | s | RES, CHIP 6.8K (1005) |
| R37 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R38 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R39 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R40 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R41 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R42 | 1-208-891-81 | s | RES, CHIP 1.5K (1005) |
| R43 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R44 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R45 | 1-208-907-81 | s | RES, CHIP 6.8K (1005) |
| R46 | 1-208-891-81 | s | RES, CHIP 1.5K (1005) |
| R47 | 1-208-891-81 | s | RES, CHIP 1.5K (1005) |
| R51 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R52 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R53 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R54 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R55 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R56 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R57 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R58 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R59 | 1-208-907-81 | s | RES, CHIP 6.8K (1005) |
| R60 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R61 | 1-208-931-81 | s | RES, CHIP 68K (1005) |
| R62 | 1-208-911-81 | s | RES, CHIP 10K (1005) |

(SDP-15 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R63 | 1-208-907-81 | s | RES, CHIP 6.8K (1005) |
| R64 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R65 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R66 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R67 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R68 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R69 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R70 | 1-208-867-81 | s | RES, CHIP 150 (1005) |
| R71 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R72 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R101 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R102 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R103 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R104 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R105 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R106 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R107 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R108 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R109 | 1-208-899-81 | s | RES, CHIP 3.3K (1005) |
| R110 | 1-208-875-81 | s | RES, CHIP 330 (1005) |
| R111 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R112 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R113 | 1-208-907-81 | s | RES, CHIP 6.8K (1005) |
| R114 | 1-208-891-81 | s | RES, CHIP 1.5K (1005) |
| R115 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R116 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R117 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R118 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R119 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R120 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R121 | 1-208-907-81 | s | RES, CHIP 6.8K (1005) |
| R122 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R123 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R124 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R125 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R126 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R127 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R128 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R129 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R130 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R131 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R132 | 1-208-907-81 | s | RES, CHIP 6.8K (1005) |
| R133 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R134 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R135 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R136 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R139 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R140 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R141 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R142 | 1-208-907-81 | s | RES, CHIP 6.8K (1005) |
| R143 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R144 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R145 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R146 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R147 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R148 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R149 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R150 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R151 | 1-208-863-81 | s | RES, CHIP 100 (1005) |

(SDP-15 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R152 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R153 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R154 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R155 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R157 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R158 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R159 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R161 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R162 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R163 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R164 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R165 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R166 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R167 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R168 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R226 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R227 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R228 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R230 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R236 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| R237 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| R238 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R239 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R240 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R241 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R242 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R243 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R244 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R245 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R246 | 1-208-907-81 | s | RES, CHIP 6.8K (1005) |
| R248 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R249 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R251 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R252 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R253 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R254 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R255 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R256 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R257 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R259 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R260 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R262 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R263 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R264 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R265 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R268 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R269 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R270 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R271 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R272 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R273 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R274 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R275 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R276 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R277 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R278 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R280 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R281 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R282 | 1-208-911-81 | s | RES, CHIP 10K (1005) |

(SDP-15 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R283 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R284 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R285 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R286 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R287 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R288 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R290 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R291 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R298 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R299 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R301 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R302 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R303 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R305 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R306 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R307 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R308 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R311 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R312 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R313 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R314 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R315 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R316 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R317 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R318 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R319 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R320 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R321 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R322 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R323 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R324 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R325 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R326 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R327 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R328 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R329 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R330 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R331 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R332 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R333 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R334 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R335 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R336 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R337 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R338 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R339 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R340 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R342 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R343 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R345 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R346 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R347 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R348 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R349 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R350 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R351 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R352 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R353 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R354 | 1-208-863-81 | s | RES, CHIP 100 (1005) |

(SDP-15 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R355 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R358 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R359 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R360 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R361 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R362 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R363 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R364 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R365 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R366 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R367 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R368 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R369 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R370 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R371 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R372 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R373 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R374 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R375 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R376 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R378 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R379 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R380 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R383 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R387 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R388 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R390 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R391 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R392 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R393 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R394 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R395 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R396 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R397 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R398 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R399 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R401 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R402 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R403 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R404 | 1-208-899-81 | s | RES, CHIP 3.3K (1005) |
| R405 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R406 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R407 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R408 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R409 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R410 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R411 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R412 | 1-208-907-81 | s | RES, CHIP 6.8K (1005) |
| R413 | 1-208-891-81 | s | RES, CHIP 1.5K (1005) |
| R414 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R415 | 1-208-907-81 | s | RES, CHIP 6.8K (1005) |
| R416 | 1-208-891-81 | s | RES, CHIP 1.5K (1005) |
| R417 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R418 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R419 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R423 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R425 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R428 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R429 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |

(SDP-15 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R430 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R431 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R432 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R433 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R434 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R435 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R437 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R438 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R439 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R440 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R441 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R442 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R443 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R444 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R445 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R446 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R447 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R448 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R449 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R453 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R454 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R456 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R458 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R460 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R467 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R468 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R470 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R471 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R474 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R475 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R476 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R477 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R478 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R479 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R480 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R481 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R482 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R483 | 1-208-899-81 | s | RES, CHIP 3.3K (1005) |
| R484 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R485 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R486 | 1-208-867-81 | s | RES, CHIP 150 (1005) |
| R487 | 1-208-867-81 | s | RES, CHIP 150 (1005) |
| R517 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R518 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R519 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R520 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R521 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R522 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R523 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R524 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R525 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R526 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R527 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| R528 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| R529 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R530 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R531 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R532 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R533 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |

(SDP-15 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R534 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R535 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R536 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R537 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R538 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R539 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R540 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R541 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R542 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R543 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R545 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R546 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R548 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R549 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R550 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R551 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R552 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R553 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R624 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R632 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R633 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R634 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R701 | 1-208-860-81 | s | RES, CHIP 75 (1005) |
| R702 | 1-208-860-81 | s | RES, CHIP 75 (1005) |
| R703 | 1-208-860-81 | s | RES, CHIP 75 (1005) |
| R704 | 1-208-860-81 | s | RES, CHIP 75 (1005) |
| R705 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R706 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R707 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R708 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R709 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R710 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R711 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R712 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R713 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R714 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R715 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| R716 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| R719 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R720 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R721 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R722 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R723 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R725 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R727 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R728 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R729 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R731 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R732 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R733 | 1-208-907-81 | s | RES, CHIP 6.8K (1005) |
| R735 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R736 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R737 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R739 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R740 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R741 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R742 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R744 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R745 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |

(SDP-15 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R746 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R747 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R749 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R750 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R751 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R752 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R753 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R754 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R757 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R758 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R759 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R760 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R761 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R762 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R763 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R986 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| RB201 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB202 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB203 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB204 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB205 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB206 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB207 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB208 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB213 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB301 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB302 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB303 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB304 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB305 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB306 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB307 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB308 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB309 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB310 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB311 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB312 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB313 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB314 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB315 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB316 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB317 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB318 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB319 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB325 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB326 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB327 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB328 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB329 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB401 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB402 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB403 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB404 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB405 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB412 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB413 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB414 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB415 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |

(SDP-15 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| RB416 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB701 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB702 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB703 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB704 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB705 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| S301 | 1-692-271-41 | s | SWITCH, SLIDE |
| THP401 ⚠ | 1-804-458-21 | s | THERMISTOR, POSITIVE |
| TP201 | 1-535-877-22 | s | CHIP, CHECKER |
| TP301 | 1-535-877-22 | s | CHIP, CHECKER |
| TP701 | 1-535-877-22 | s | CHIP, CHECKER |
| X201 | 1-795-872-11 | s | OSCILLATOR |
| X301 | 1-795-872-11 | s | OSCILLATOR |

---

VDA-64A BOARD

---

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| 1pc | A-1132-791-A | s | MOUNTED CIRCUIT BOARD, VDA-64A |
| 8pcs | 3-364-941-01 | s | SCREW (+B) (2.6X5), NYLOK |
| C1 | 1-126-396-21 | s | CAP, CHIP ELECT 47MF (6.3X5.7) |
| C2 | 1-126-396-21 | s | CAP, CHIP ELECT 47MF (6.3X5.7) |
| C3 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| C4 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| C7 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| C9 | 1-126-394-21 | s | CAP, CHIP ELECT 10MF (4X5.7) |
| C10 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| C11 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C12 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C13 | 1-128-589-21 | s | CAP, CHIP ELECT 47MF |
| C14 | 1-128-589-21 | s | CAP, CHIP ELECT 47MF |
| C101 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C102 | 1-128-589-21 | s | CAP, CHIP ELECT 47MF |
| C103 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C104 | 1-128-589-21 | s | CAP, CHIP ELECT 47MF |
| C105 | 1-128-589-21 | s | CAP, CHIP ELECT 47MF |
| C106 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C107 | 1-128-589-21 | s | CAP, CHIP ELECT 47MF |
| C108 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C201 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C202 | 1-128-589-21 | s | CAP, CHIP ELECT 47MF |
| C203 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C204 | 1-128-589-21 | s | CAP, CHIP ELECT 47MF |
| C205 | 1-128-589-21 | s | CAP, CHIP ELECT 47MF |
| C206 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C207 | 1-128-589-21 | s | CAP, CHIP ELECT 47MF |
| C208 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C211 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| CN1 | 1-793-324-11 | o | CONNECTOR, COAXIAL (BNC TYPE) |
| CN2 | 1-793-324-11 | o | CONNECTOR, COAXIAL (BNC TYPE) |
| CN3 | 1-793-324-11 | o | CONNECTOR, COAXIAL (BNC TYPE) |
| CN4 | 1-793-324-11 | o | CONNECTOR, COAXIAL (BNC TYPE) |
| D1 | 8-719-017-03 | s | DIODE 02DZ4.7-TPH3 |
| D2 | 8-719-017-03 | s | DIODE 02DZ4.7-TPH3 |
| D201 | 8-719-024-83 | s | DIODE 1SS301-TE85L |
| E101 | 1-535-877-22 | s | CHIP, CHECKER |
| E102 | 1-535-877-22 | s | CHIP, CHECKER |
| FL101 | 1-813-437-11 | s | FILTER, LOW PASS (10MHZ) |
| FL201 | 1-813-437-11 | s | FILTER, LOW PASS (10MHZ) |
| FL202 | 1-813-437-11 | s | FILTER, LOW PASS (10MHZ) |
| IC1 | 6-704-976-01 | s | IC ADR381ARTZ-REEL7 |
| IC2 | 8-759-327-01 | s | IC NJM062V(TE2) |
| IC3 | 8-759-338-95 | s | IC NJM2903V(TE2) |
| IC101 | 8-759-561-46 | s | IC AD8014ARTZ-REEL7 |
| IC102 | 8-759-561-46 | s | IC AD8014ARTZ-REEL7 |
| IC201 | 8-759-561-46 | s | IC AD8014ARTZ-REEL7 |
| IC202 | 8-759-561-46 | s | IC AD8014ARTZ-REEL7 |
| L1 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L2 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L101 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L102 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L103 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L104 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L201 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |

(VDA-64A BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| L202 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L203 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L204 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L205 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| Q1 | 8-729-209-73 | s | TRANSISTOR 2SA1213Y-TE12L |
| Q2 | 8-729-209-77 | s | TRANSISTOR 2SC2873Y-TE12L |
| Q3 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q201 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q202 | 8-729-928-25 | s | TRANSISTOR 2SA1774TL-QR |
| Q203 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| R2 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| R3 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| R12 | 1-218-831-91 | s | RES, CHIP 220 (1608) |
| R13 | 1-218-831-91 | s | RES, CHIP 220 (1608) |
| R14 | 1-218-883-91 | s | RES, CHIP 33K (1608) |
| R15 | 1-218-855-91 | s | RES, CHIP 2.2K (1608) |
| R16 | 1-218-875-91 | s | RES, CHIP 15K (1608) |
| R17 | 1-218-875-91 | s | RES, CHIP 15K (1608) |
| R18 | 1-218-879-91 | s | RES, CHIP 22K (1608) |
| R19 | 1-218-855-91 | s | RES, CHIP 2.2K (1608) |
| R20 | 1-218-883-91 | s | RES, CHIP 33K (1608) |
| R21 | 1-218-887-91 | s | RES, CHIP 47K (1608) |
| R22 | 1-218-883-91 | s | RES, CHIP 33K (1608) |
| R23 | 1-218-891-91 | s | RES, CHIP 68K (1608) |
| R24 | 1-218-891-91 | s | RES, CHIP 68K (1608) |
| R25 | 1-218-855-91 | s | RES, CHIP 2.2K (1608) |
| R26 | 1-218-879-91 | s | RES, CHIP 22K (1608) |
| R27 | 1-218-879-91 | s | RES, CHIP 22K (1608) |
| R28 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R102 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R107 | 1-218-847-91 | s | RES, CHIP 1.0K (1608) |
| R109 | 1-218-831-91 | s | RES, CHIP 220 (1608) |
| R111 | 1-218-839-91 | s | RES, CHIP 470 (1608) |
| R114 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R117 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| R118 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| R119 | 1-218-847-91 | s | RES, CHIP 1.0K (1608) |
| R120 | 1-218-847-91 | s | RES, CHIP 1.0K (1608) |
| R121 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R122 | 1-218-843-91 | s | RES, CHIP 680 (1608) |
| R123 | 1-218-843-91 | s | RES, CHIP 680 (1608) |
| R126 | 1-218-843-91 | s | RES, CHIP 680 (1608) |
| R127 | 1-218-843-91 | s | RES, CHIP 680 (1608) |
| R134 | 1-211-990-91 | s | RES, CHIP 75 (1608) |
| R135 | 1-211-990-91 | s | RES, CHIP 75 (1608) |
| R142 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| R143 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| R202 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R204 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R205 | 1-218-887-91 | s | RES, CHIP 47K (1608) |
| R207 | 1-218-847-91 | s | RES, CHIP 1.0K (1608) |
| R208 | 1-218-847-91 | s | RES, CHIP 1.0K (1608) |
| R209 | 1-218-831-91 | s | RES, CHIP 220 (1608) |
| R210 | 1-218-831-91 | s | RES, CHIP 220 (1608) |
| R212 | 1-218-839-91 | s | RES, CHIP 470 (1608) |
| R214 | 1-218-839-91 | s | RES, CHIP 470 (1608) |
| R215 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| R216 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |

(VDA-64A BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R217 | 1-218-847-91 | s | RES, CHIP 1.0K (1608) |
| R218 | 1-218-847-91 | s | RES, CHIP 1.0K (1608) |
| R219 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R220 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R221 | 1-218-843-91 | s | RES, CHIP 680 (1608) |
| R222 | 1-218-843-91 | s | RES, CHIP 680 (1608) |
| R225 | 1-218-843-91 | s | RES, CHIP 680 (1608) |
| R226 | 1-218-843-91 | s | RES, CHIP 680 (1608) |
| R227 | 1-211-990-91 | s | RES, CHIP 75 (1608) |
| R228 | 1-211-990-91 | s | RES, CHIP 75 (1608) |
| R229 | 1-218-887-91 | s | RES, CHIP 47K (1608) |
| R230 | 1-218-887-91 | s | RES, CHIP 47K (1608) |
| R231 | 1-218-887-91 | s | RES, CHIP 47K (1608) |
| R232 | 1-211-977-91 | s | RES, CHIP 22 (1608) |
| R235 | 1-218-859-91 | s | RES, CHIP 3.3K (1608) |
| R236 | 1-218-887-91 | s | RES, CHIP 47K (1608) |
| R237 | 1-211-977-91 | s | RES, CHIP 22 (1608) |
| RY201 | 1-755-380-21 | s | RELAY |

---
VDA-64B BOARD
---

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| 1pc | A-1132-792-A | s | MOUNTED CIRCUIT BOARD, VDA-64B |
| 8pcs | 3-364-941-01 | s | SCREW (+B) (2.6X5), NYLOK |
| C1 | 1-126-396-21 | s | CAP, CHIP ELECT 47MF (6.3X5.7) |
| C2 | 1-126-396-21 | s | CAP, CHIP ELECT 47MF (6.3X5.7) |
| C3 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| C4 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| C7 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| C9 | 1-126-394-21 | s | CAP, CHIP ELECT 10MF (4X5.7) |
| C10 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| C11 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C12 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C13 | 1-128-589-21 | s | CAP, CHIP ELECT 47MF |
| C14 | 1-128-589-21 | s | CAP, CHIP ELECT 47MF |
| C103 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C104 | 1-128-589-21 | s | CAP, CHIP ELECT 47MF |
| C107 | 1-128-589-21 | s | CAP, CHIP ELECT 47MF |
| C108 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C111 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C112 | 1-128-589-21 | s | CAP, CHIP ELECT 47MF |
| C116 | 1-128-589-21 | s | CAP, CHIP ELECT 47MF |
| C117 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C118 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C201 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C202 | 1-128-589-21 | s | CAP, CHIP ELECT 47MF |
| C203 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C204 | 1-128-589-21 | s | CAP, CHIP ELECT 47MF |
| C205 | 1-128-589-21 | s | CAP, CHIP ELECT 47MF |
| C206 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C207 | 1-128-589-21 | s | CAP, CHIP ELECT 47MF |
| C208 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C211 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| CN1 | 1-793-324-11 | o | CONNECTOR, COAXIAL (BNC TYPE) |
| CN2 | 1-793-324-11 | o | CONNECTOR, COAXIAL (BNC TYPE) |
| CN3 | 1-793-324-11 | o | CONNECTOR, COAXIAL (BNC TYPE) |
| CN4 | 1-793-324-11 | o | CONNECTOR, COAXIAL (BNC TYPE) |
| D1 | 8-719-017-03 | s | DIODE 02DZ4.7-TPH3 |
| D2 | 8-719-017-03 | s | DIODE 02DZ4.7-TPH3 |
| D101 | 8-719-024-83 | s | DIODE 1SS301-TE85L |
| D201 | 8-719-024-83 | s | DIODE 1SS301-TE85L |
| E101 | 1-535-877-22 | s | CHIP, CHECKER |
| E102 | 1-535-877-22 | s | CHIP, CHECKER |
| FL102 | 1-813-437-11 | s | FILTER, LOW PASS (10MHZ) |
| FL201 | 1-813-437-11 | s | FILTER, LOW PASS (10MHZ) |
| FL202 | 1-813-437-11 | s | FILTER, LOW PASS (10MHZ) |
| IC1 | 6-704-976-01 | s | IC ADR381ARTZ-REEL7 |
| IC2 | 8-759-327-01 | s | IC NJM062V(TE2) |
| IC3 | 8-759-338-95 | s | IC NJM2903V(TE2) |
| IC102 | 8-759-561-46 | s | IC AD8014ARTZ-REEL7 |
| IC103 | 8-759-561-46 | s | IC AD8014ARTZ-REEL7 |
| IC201 | 8-759-561-46 | s | IC AD8014ARTZ-REEL7 |
| IC202 | 8-759-561-46 | s | IC AD8014ARTZ-REEL7 |
| L1 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L2 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L102 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L104 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L105 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |

(VDA-64B BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| L106 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L107 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L201 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L202 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L203 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L204 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L205 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| Q1 | 8-729-209-73 | s | TRANSISTOR 2SA1213Y-TE12L |
| Q2 | 8-729-209-77 | s | TRANSISTOR 2SC2873Y-TE12L |
| Q3 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q101 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q102 | 8-729-928-25 | s | TRANSISTOR 2SA1774TL-QR |
| Q103 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q201 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q202 | 8-729-928-25 | s | TRANSISTOR 2SA1774TL-QR |
| Q203 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| R2 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| R12 | 1-218-831-91 | s | RES, CHIP 220 (1608) |
| R13 | 1-218-831-91 | s | RES, CHIP 220 (1608) |
| R14 | 1-218-883-91 | s | RES, CHIP 33K (1608) |
| R15 | 1-218-855-91 | s | RES, CHIP 2.2K (1608) |
| R16 | 1-218-875-91 | s | RES, CHIP 15K (1608) |
| R17 | 1-218-875-91 | s | RES, CHIP 15K (1608) |
| R18 | 1-218-879-91 | s | RES, CHIP 22K (1608) |
| R19 | 1-218-855-91 | s | RES, CHIP 2.2K (1608) |
| R20 | 1-218-883-91 | s | RES, CHIP 33K (1608) |
| R21 | 1-218-887-91 | s | RES, CHIP 47K (1608) |
| R22 | 1-218-883-91 | s | RES, CHIP 33K (1608) |
| R23 | 1-218-891-91 | s | RES, CHIP 68K (1608) |
| R24 | 1-218-891-91 | s | RES, CHIP 68K (1608) |
| R25 | 1-218-855-91 | s | RES, CHIP 2.2K (1608) |
| R26 | 1-218-879-91 | s | RES, CHIP 22K (1608) |
| R27 | 1-218-879-91 | s | RES, CHIP 22K (1608) |
| R28 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R104 | 1-218-859-91 | s | RES, CHIP 3.3K (1608) |
| R105 | 1-218-887-91 | s | RES, CHIP 47K (1608) |
| R108 | 1-218-839-91 | s | RES, CHIP 470 (1608) |
| R110 | 1-211-985-91 | s | RES, CHIP 47 (1608) |
| R113 | 1-218-839-91 | s | RES, CHIP 470 (1608) |
| R116 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R118 | 1-211-985-91 | s | RES, CHIP 47 (1608) |
| R120 | 1-218-839-91 | s | RES, CHIP 470 (1608) |
| R123 | 1-218-839-91 | s | RES, CHIP 470 (1608) |
| R127 | 1-218-843-91 | s | RES, CHIP 680 (1608) |
| R129 | 1-218-835-91 | s | RES, CHIP 330 (1608) |
| R130 | 1-218-859-91 | s | RES, CHIP 3.3K (1608) |
| R133 | 1-218-847-91 | s | RES, CHIP 1.0K (1608) |
| R135 | 1-211-990-91 | s | RES, CHIP 75 (1608) |
| R136 | 1-218-871-91 | s | RES, CHIP 10K (1608) |
| R137 | 1-218-831-91 | s | RES, CHIP 220 (1608) |
| R138 | 1-218-887-91 | s | RES, CHIP 47K (1608) |
| R139 | 1-218-887-91 | s | RES, CHIP 47K (1608) |
| R140 | 1-218-887-91 | s | RES, CHIP 47K (1608) |
| R141 | 1-211-977-91 | s | RES, CHIP 22 (1608) |
| R144 | 1-218-859-91 | s | RES, CHIP 3.3K (1608) |
| R145 | 1-218-887-91 | s | RES, CHIP 47K (1608) |
| R146 | 1-211-977-91 | s | RES, CHIP 22 (1608) |
| R202 | 1-218-823-91 | s | RES, CHIP 100 (1608) |

(VDA-64B BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R204 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R205 | 1-218-887-91 | s | RES, CHIP 47K (1608) |
| R207 | 1-218-847-91 | s | RES, CHIP 1.0K (1608) |
| R208 | 1-218-847-91 | s | RES, CHIP 1.0K (1608) |
| R209 | 1-218-831-91 | s | RES, CHIP 220 (1608) |
| R210 | 1-218-831-91 | s | RES, CHIP 220 (1608) |
| R212 | 1-218-839-91 | s | RES, CHIP 470 (1608) |
| R214 | 1-218-839-91 | s | RES, CHIP 470 (1608) |
| R215 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| R216 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| R217 | 1-218-847-91 | s | RES, CHIP 1.0K (1608) |
| R218 | 1-218-847-91 | s | RES, CHIP 1.0K (1608) |
| R219 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R220 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R221 | 1-218-843-91 | s | RES, CHIP 680 (1608) |
| R222 | 1-218-843-91 | s | RES, CHIP 680 (1608) |
| R225 | 1-218-843-91 | s | RES, CHIP 680 (1608) |
| R226 | 1-218-843-91 | s | RES, CHIP 680 (1608) |
| R227 | 1-211-990-91 | s | RES, CHIP 75 (1608) |
| R228 | 1-211-990-91 | s | RES, CHIP 75 (1608) |
| R229 | 1-218-887-91 | s | RES, CHIP 47K (1608) |
| R230 | 1-218-887-91 | s | RES, CHIP 47K (1608) |
| R231 | 1-218-887-91 | s | RES, CHIP 47K (1608) |
| R232 | 1-211-977-91 | s | RES, CHIP 22 (1608) |
| R235 | 1-218-859-91 | s | RES, CHIP 3.3K (1608) |
| R236 | 1-218-887-91 | s | RES, CHIP 47K (1608) |
| R237 | 1-211-977-91 | s | RES, CHIP 22 (1608) |
| R238 | 1-211-990-91 | s | RES, CHIP 75 (1608) |
| RY101 | 1-755-380-21 | s | RELAY |
| RY201 | 1-755-380-21 | s | RELAY |

---

VIF-34G BOARD

---

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| 1pc | A-1161-076-A | s | MOUNTED CIRCUIT BOARD, VIF-34G |
| C1 | 1-127-573-91 | s | CAP, CHIP CERAMIC 1MF B (2012) |
| C2 | 1-127-573-91 | s | CAP, CHIP CERAMIC 1MF B (2012) |
| C3 | 1-126-395-21 | s | CAP, CHIP ELECT 22MF (5X5.7) |
| C4 | 1-126-395-21 | s | CAP, CHIP ELECT 22MF (5X5.7) |
| C5 | 1-164-874-81 | s | CAP,CHIP CERAMIC 100PF CH 1005 |
| C6 | 1-164-874-81 | s | CAP,CHIP CERAMIC 100PF CH 1005 |
| C7 | 1-100-505-91 | s | CAP, CERAMIC 0.1MF C (1005) |
| C8 | 1-100-505-91 | s | CAP, CERAMIC 0.1MF C (1005) |
| C9 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C10 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C11 | 1-164-874-81 | s | CAP,CHIP CERAMIC 100PF CH 1005 |
| C12 | 1-127-573-91 | s | CAP, CHIP CERAMIC 1MF B (2012) |
| C13 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C14 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C15 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C16 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C17 | 1-127-573-91 | s | CAP, CHIP CERAMIC 1MF B (2012) |
| C18 | 1-115-340-91 | s | CAP, CERAMIC 0.22MF B (2012) |
| C19 | 1-115-340-91 | s | CAP, CERAMIC 0.22MF B (2012) |
| C20 | 1-128-589-21 | s | CAP, CHIP ELECT 47MF |
| C21 | 1-126-399-21 | s | CAP, CHIP ELECT 10MF (5X5.7) |
| C22 | 1-126-399-21 | s | CAP, CHIP ELECT 10MF (5X5.7) |
| C23 | 1-164-874-81 | s | CAP,CHIP CERAMIC 100PF CH 1005 |
| C24 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C25 | 1-164-874-81 | s | CAP,CHIP CERAMIC 100PF CH 1005 |
| C26 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C27 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C28 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C29 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C31 | 1-100-505-91 | s | CAP, CERAMIC 0.1MF C (1005) |
| C32 | 1-100-505-91 | s | CAP, CERAMIC 0.1MF C (1005) |
| C33 | 1-100-505-91 | s | CAP, CERAMIC 0.1MF C (1005) |
| C34 | 1-100-505-91 | s | CAP, CERAMIC 0.1MF C (1005) |
| C35 | 1-100-505-91 | s | CAP, CERAMIC 0.1MF C (1005) |
| C36 | 1-100-505-91 | s | CAP, CERAMIC 0.1MF C (1005) |
| C101 | 1-100-505-91 | s | CAP, CERAMIC 0.1MF C (1005) |
| C102 | 1-100-505-91 | s | CAP, CERAMIC 0.1MF C (1005) |
| C103 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C104 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C105 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C106 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C107 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C108 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C109 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C110 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C111 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C112 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C113 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C114 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C115 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C116 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C117 | 1-164-874-81 | s | CAP,CHIP CERAMIC 100PF CH 1005 |
| C120 | 1-127-573-91 | s | CAP, CHIP CERAMIC 1MF B (2012) |
| C121 | 1-127-573-91 | s | CAP, CHIP CERAMIC 1MF B (2012) |
| C122 | 1-100-505-91 | s | CAP, CERAMIC 0.1MF C (1005) |
| CN3 | 1-778-451-31 | s | CONNECTOR, FFC/FPC(ZIF) AN 50P |
| CN4 | 1-770-161-21 | s | PIN, CONNECTOR (PC BOARD) 6P |

(VIF-34G BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| CN5 | 1-778-451-31 | s | CONNECTOR, FFC/FPC(ZIF) AN 50P |
| CN101 | 1-695-480-21 | o | PIN, CONNECTOR (PC BOARD) 2P |
| D1 | 8-719-017-03 | s | DIODE 02DZ4.7-TPH3 |
| D2 | 8-719-017-03 | s | DIODE 02DZ4.7-TPH3 |
| D3 | 8-719-017-03 | s | DIODE 02DZ4.7-TPH3 |
| D4 | 8-719-046-86 | s | DIODE F1J6TP |
| D31 | 8-719-421-28 | s | DIODE MA728-TX |
| D32 | 8-719-421-28 | s | DIODE MA728-TX |
| D33 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D34 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D35 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D36 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D37 | 8-719-421-28 | s | DIODE MA728-TX |
| D38 | 8-719-421-28 | s | DIODE MA728-TX |
| D39 | 8-719-421-28 | s | DIODE MA728-TX |
| D40 | 8-719-421-28 | s | DIODE MA728-TX |
| D41 | 8-719-421-28 | s | DIODE MA728-TX |
| D42 | 8-719-421-28 | s | DIODE MA728-TX |
| D43 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D44 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D45 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D46 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D47 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D48 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D49 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D50 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D51 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D52 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D53 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D54 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D55 | 8-719-421-28 | s | DIODE MA728-TX |
| D56 | 8-719-421-28 | s | DIODE MA728-TX |
| D57 | 8-719-421-28 | s | DIODE MA728-TX |
| D58 | 8-719-421-28 | s | DIODE MA728-TX |
| D59 | 8-719-421-28 | s | DIODE MA728-TX |
| D60 | 8-719-421-28 | s | DIODE MA728-TX |
| D61 | 8-719-421-28 | s | DIODE MA728-TX |
| D62 | 8-719-421-28 | s | DIODE MA728-TX |
| D63 | 8-719-421-28 | s | DIODE MA728-TX |
| D64 | 8-719-421-28 | s | DIODE MA728-TX |
| D65 | 8-719-421-28 | s | DIODE MA728-TX |
| D66 | 8-719-421-28 | s | DIODE MA728-TX |
| D67 | 8-719-421-28 | s | DIODE MA728-TX |
| D68 | 8-719-421-28 | s | DIODE MA728-TX |
| D69 | 8-719-421-28 | s | DIODE MA728-TX |
| D70 | 8-719-421-28 | s | DIODE MA728-TX |
| D71 | 8-719-421-28 | s | DIODE MA728-TX |
| D72 | 8-719-421-28 | s | DIODE MA728-TX |
| D73 | 8-719-421-28 | s | DIODE MA728-TX |
| D74 | 8-719-421-28 | s | DIODE MA728-TX |
| D75 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D76 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D77 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D78 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D79 | 8-719-421-28 | s | DIODE MA728-TX |
| D80 | 8-719-421-28 | s | DIODE MA728-TX |
| D81 | 8-719-421-28 | s | DIODE MA728-TX |
| D82 | 8-719-421-28 | s | DIODE MA728-TX |

(VIF-34G BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| D83 | 8-719-421-28 | s | DIODE MA728-TX |
| D84 | 8-719-421-28 | s | DIODE MA728-TX |
| D85 | 8-719-421-28 | s | DIODE MA728-TX |
| D86 | 8-719-421-28 | s | DIODE MA728-TX |
| D101 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D102 | 8-719-421-28 | s | DIODE MA728-TX |
| D103 | 8-719-421-28 | s | DIODE MA728-TX |
| D104 | 8-719-421-28 | s | DIODE MA728-TX |
| D105 | 8-719-421-28 | s | DIODE MA728-TX |
| D106 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D107 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D108 | 8-719-421-28 | s | DIODE MA728-TX |
| D109 | 8-719-421-28 | s | DIODE MA728-TX |
| D110 | 8-719-421-28 | s | DIODE MA728-TX |
| D111 | 8-719-421-28 | s | DIODE MA728-TX |
| D112 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D113 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D114 | 8-719-421-28 | s | DIODE MA728-TX |
| D115 | 8-719-421-28 | s | DIODE MA728-TX |
| D116 | 8-719-421-28 | s | DIODE MA728-TX |
| D117 | 8-719-421-28 | s | DIODE MA728-TX |
| D118 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D119 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D120 | 8-719-421-28 | s | DIODE MA728-TX |
| D121 | 8-719-421-28 | s | DIODE MA728-TX |
| D122 | 8-719-421-28 | s | DIODE MA728-TX |
| D123 | 8-719-421-28 | s | DIODE MA728-TX |
| D124 | 8-719-421-28 | s | DIODE MA728-TX |
| D125 | 8-719-421-28 | s | DIODE MA728-TX |
| D126 | 8-719-421-28 | s | DIODE MA728-TX |
| D127 | 8-719-421-28 | s | DIODE MA728-TX |
| D128 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D129 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| E1 | 1-535-877-22 | s | CHIP, CHECKER |
| IC1 | 8-759-327-01 | s | IC NJM062V(TE2) |
| IC2 | 6-704-976-01 | s | IC ADR381ARTZ-REEL7 |
| IC3 | 8-759-561-46 | s | IC AD8014ARTZ-REEL7 |
| IC4 | 8-759-327-01 | s | IC NJM062V(TE2) |
| IC31 | 8-759-472-18 | s | IC 74VHC138MTCX |
| IC32 | 8-752-392-03 | s | IC CXD1095BR |
| IC33 | 8-759-472-43 | s | IC 74VHC245MTCX |
| IC34 | 8-759-662-39 | s | IC 74VHCT245AMTCX |
| IC35 | 8-759-524-04 | s | IC TC74VHC125FT(EL) |
| IC36 | 8-759-524-04 | s | IC TC74VHC125FT(EL) |
| IC101 | 8-752-392-03 | s | IC CXD1095BR |
| IC102 | 8-759-662-39 | s | IC 74VHCT245AMTCX |
| IC103 | 8-759-564-49 | s | IC TC7W53FU(TE12R) |
| IC104 | 8-759-561-46 | s | IC AD8014ARTZ-REEL7 |
| IC105 | 8-759-561-46 | s | IC AD8014ARTZ-REEL7 |
| IC106 | 8-759-561-46 | s | IC AD8014ARTZ-REEL7 |
| IC107 | 8-759-256-45 | s | IC NJM4560M-TE2 |
| IC108 | 6-710-018-01 | s | IC CAT24C02WI-GT3 |
| L1 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L2 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L3 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L4 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L101 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |

(VIF-34G BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| L102 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L103 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L104 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L105 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L106 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| Q1 | 8-729-209-73 | s | TRANSISTOR 2SA1213Y-TE12L |
| Q2 | 8-729-209-77 | s | TRANSISTOR 2SC2873Y-TE12L |
| Q3 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q5 | 6-551-380-01 | s | TRANSISTOR SI4425BDY-T1 |
| Q6 | 8-729-209-73 | s | TRANSISTOR 2SA1213Y-TE12L |
| Q31 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q32 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q33 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q34 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q35 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q36 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q37 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q38 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q39 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q40 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q41 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q42 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q43 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q44 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q45 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q46 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q101 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q102 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q103 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q104 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q105 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q106 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q107 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q108 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q109 | 8-729-928-25 | s | TRANSISTOR 2SA1774TL-QR |
| R1 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R2 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R3 | 1-208-875-81 | s | RES, CHIP 330 (1005) |
| R4 | 1-208-899-81 | s | RES, CHIP 3.3K (1005) |
| R5 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R6 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R7 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R8 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R9 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R10 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R11 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R12 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R14 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R15 | 1-208-931-81 | s | RES, CHIP 68K (1005) |
| R16 | 1-208-931-81 | s | RES, CHIP 68K (1005) |
| R19 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R22 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R23 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R24 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R25 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R26 | 1-208-907-81 | s | RES, CHIP 6.8K (1005) |
| R27 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R31 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R32 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |

(VIF-34G BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R33 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R34 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R35 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R36 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R37 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R38 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R39 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R40 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R41 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R42 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R43 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R44 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R45 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R46 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R47 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R48 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R49 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R50 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R51 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R52 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R53 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R54 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R55 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R56 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R57 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R58 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R59 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R60 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R61 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R62 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R63 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R64 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R65 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R66 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R67 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R101 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R102 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R103 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R104 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R105 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R106 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R107 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R108 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R109 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R110 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R111 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R112 | 1-208-875-81 | s | RES, CHIP 330 (1005) |
| R113 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R114 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R115 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R116 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R119 | 1-208-899-81 | s | RES, CHIP 3.3K (1005) |
| R121 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R122 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R123 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R124 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R126 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R128 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R129 | 1-208-875-81 | s | RES, CHIP 330 (1005) |

(VIF-34G BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R130 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R132 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R133 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R134 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R136 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R137 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R138 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R139 | 1-208-867-81 | s | RES, CHIP 150 (1005) |
| R140 | 1-208-867-81 | s | RES, CHIP 150 (1005) |
| R141 | 1-208-867-81 | s | RES, CHIP 150 (1005) |
| R142 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R143 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R144 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R145 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R146 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R147 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R148 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R149 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R150 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R151 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R152 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R153 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R154 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R155 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R156 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R157 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R158 | 1-208-867-81 | s | RES, CHIP 150 (1005) |
| R159 | 1-208-867-81 | s | RES, CHIP 150 (1005) |
| R160 | 1-208-867-81 | s | RES, CHIP 150 (1005) |
| R161 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R162 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R163 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R164 | 1-208-899-81 | s | RES, CHIP 3.3K (1005) |
| R165 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R166 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| RB31 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB32 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB33 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB34 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB35 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB36 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB37 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB38 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB39 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB40 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB41 | 1-233-577-21 | s | RES, CHIP NETWORK 470 (3216) |
| RB42 | 1-233-577-21 | s | RES, CHIP NETWORK 470 (3216) |
| RB43 | 1-233-810-21 | s | RES, NETWORK 100K (3216) |
| RB44 | 1-234-378-21 | s | RES, NETWORK 10K (1005X4) |
| RB45 | 1-234-378-21 | s | RES, NETWORK 10K (1005X4) |
| RB46 | 1-233-810-21 | s | RES, NETWORK 100K (3216) |
| RB47 | 1-233-810-21 | s | RES, NETWORK 100K (3216) |
| RB48 | 1-233-810-21 | s | RES, NETWORK 100K (3216) |
| RB49 | 1-233-578-21 | s | RES, CHIP NETWORK 47K (3216) |
| RB50 | 1-233-578-21 | s | RES, CHIP NETWORK 47K (3216) |
| RB51 | 1-233-577-21 | s | RES, CHIP NETWORK 470 (3216) |
| RB52 | 1-233-578-21 | s | RES, CHIP NETWORK 47K (3216) |
| RB53 | 1-233-577-21 | s | RES, CHIP NETWORK 470 (3216) |
| RB54 | 1-233-578-21 | s | RES, CHIP NETWORK 47K (3216) |

(VIF-34G BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| RB55 | 1-234-380-21 | s | RES, NETWORK 47K (1005X4) |
| RB56 | 1-233-578-21 | s | RES, CHIP NETWORK 47K (3216) |
| RB57 | 1-233-578-21 | s | RES, CHIP NETWORK 47K (3216) |
| RB58 | 1-234-380-21 | s | RES, NETWORK 47K (1005X4) |
| RB62 | 1-233-577-21 | s | RES, CHIP NETWORK 470 (3216) |
| RB63 | 1-233-577-21 | s | RES, CHIP NETWORK 470 (3216) |
| RB101 | 1-233-810-21 | s | RES, NETWORK 100K (3216) |
| RB102 | 1-233-810-21 | s | RES, NETWORK 100K (3216) |
| RB103 | 1-233-810-21 | s | RES, NETWORK 100K (3216) |
| RB104 | 1-234-378-21 | s | RES, NETWORK 10K (1005X4) |
| RB105 | 1-233-577-21 | s | RES, CHIP NETWORK 470 (3216) |
| RB106 | 1-233-578-21 | s | RES, CHIP NETWORK 47K (3216) |
| RB107 | 1-233-577-21 | s | RES, CHIP NETWORK 470 (3216) |
| RB108 | 1-233-578-21 | s | RES, CHIP NETWORK 47K (3216) |
| THP1 | ⚠ 1-804-458-21 | s | THERMISTOR, POSITIVE |
| THP2 | ⚠ 1-804-458-21 | s | THERMISTOR, POSITIVE |
| THP3 | ⚠ 1-803-615-21 | s | THERMISTOR, POSITIVE |
| THP4 | ⚠ 1-803-615-21 | s | THERMISTOR, POSITIVE |
| THP5 | ⚠ 1-803-615-21 | s | THERMISTOR, POSITIVE |
| THP6 | ⚠ 1-804-458-21 | s | THERMISTOR, POSITIVE |

## 4-4. Packing Materials & Supplied Accessories

--------
HDCU3300
--------

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| 1pc | A-8278-054-B | s | REMOTE INDICATOR ASSY |
| 1pc | ⚠ 1-576-230-51 | s | FUSE (H.B.C.) (3.15A/250V) |
| 1pc | ⚠ 1-576-231-51 | s | FUSE (H.B.C.) (4A/250V) (for CE) |
| 1pc | ⚠ 1-576-233-51 | s | FUSE (H.B.C.) (6.3A/250V) |
| 1pc | ⚠ 3-992-774-01 | s | OPERATION MANUAL |

-------------
HKCU1001/1003
-------------

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| 1pc | 1-560-155-00 | s | CONNECTOR (PLUG) (for HKCU1001/1003) |

## 4-5. Optional Fixtures List

| Part No. | SP | Description |
|---|---|---|
| A-1153-700-A | s | MOUNTED CIRCUIT BOARD, EX-982 |
| A-1153-701-A | s | MOUNTED CIRCUIT BOARD, EX-983 |
| A-1215-624-A | s | MOUNTED CIRCUIT BOARD, EX-1002 |
| J-6480-010-A | o | ALIGNMENT SLEEVE REMOVER |
| J-7120-140-A | o | PLD DOWNLOAD JIG |

# Section 5
# Semiconductor Pin Assignments

The following describes the semiconductor types used in this unit.
For semiconductors marked with page numbers in the index, refer to the corresponding pages in this section. However, in some cases incompatible types are also listed, therefore, when a part is to be replaced, also refer to the Spare Parts section.
In addition, for semiconductors with ID Nos., refer to the separate CD-ROM titled “Semiconductor Pin Assignments” (Sony Part No. 9-968-546-xx) that allows searching for parts by semiconductor type or ID No.
The semiconductors in the manual or on the CD-ROM are listed by equivalent types. Thus the external view or the index mark indication may differ from the actual type.
Pin assignments and block diagrams are based on the IC manufacturer’s data book.

本機に使用されている半導体型名の一覧を下記に示します。
索引中，ページが記載されている半導体は，本章の該当ページを参照してください。ただし，互換性のない型名を併記している場合がありますので，部品を交換するときは，Spare Partsの章を参照してください。
また，ID番号が記載されている半導体は，別途発行の “Semiconductor Pin Assignments” CD−ROM版 (ソニー部品番号：9−968−546−xx)を参照してください。
半導体型名またはID番号から検索ができます。
マニュアルまたはCD−ROMに掲載されている半導体は，それぞれの機能を等価的に表わしたものです。
外観やインデックスマークの表示方法が実物と異なる場合があります。
ピン配置およびブロック図はICメーカーのデータブックに従いました。


**DIODE** — **Page or ID No.**

02DZ2.0-TPH3 ..... DC008-04
02DZ4.7-TPH3 ..... DC008-04
02DZ5.1-TPH3 ..... DC008-04

1SS300-TE85L ..... DC001-02
1SS301-TE85L ..... DC001-03
1SS302-TE85L ..... DC001-01
1SS362-TE85L ..... DC001-01

F1J6TP ..... LC001-01

MA728-TX ..... DC008-01

RB706F-40 ..... DC001-01

SC802-04-TE12RA ..... DC008-02

**LED** — **Page or ID No.**

CL-191Y-CD-T ..... LC004-01
CL-191YG-CD-T ..... LC004-01
CL-196HR-CD-T ..... LC001-01
CL-196YG-CD-T ..... LC001-01

**TRANSISTOR** — **Page or ID No.**

2SA1213Y-TE12L ..... TC002-01
2SA1226-T1E3E4 ..... TC001-01
2SC3356-T1K ..... TC001-02
2SC4176T1B33B34B35 ..... TC001-02

DTA123JE-TL ..... TC001-04
DTA144EE-TL ..... TC001-04
DTC144EE-TL ..... TC001-03

NDS355AN ..... TC001-07
NDS356AP ..... TC001-20

# Index


| IC | Page or ID No. |
|---|---|
| 74VHC00MTCX | TC74HC00P |
| 74VHC04MTCX | TC74HC04P |
| 74VHC08MTCX | TC74HC08P |
| 74VHC125MTCX | MC74HC125N |
| 74VHC138MTCX | TC74HC138P |
| 74VHC244MTCX | TC74HC244P |
| 74VHC245MTCX | TC74HC245P |
| 74VHC32MTCX | TC74HC32P |
| 74VHC4053MTCX | MC74HC4053F |
| 74VHC574MTCX | TC74HC574P |
| 74VHCT00AMTCX | TC74HC00P |
| 74VHCT08AMTCX | TC74HC08P |
| 74VHCT245AMTCX | TC74HC245P |
| AK4552VT-E2 | AK4552VT-E2 |
| BCM5221A4KPT | BCM5221A4KPT |
| CXB1340N | CXB1340N |
| CXB1342R | CXB1342R |
| CXD1095BR | CXD1095AR |
| CXD1176Q-T4 | CXD1176Q |
| CXD1216M-TH | CXD1216M |
| CXD2309AQ-T6 | CXD2309Q-T6 |
| CXD2315Q-T4 | CXD2306Q |
| CXD9093R | CXD9093R |
| EPC2LC20N-TP | EPC2LC20 |
| FM18L08-70-STR | FM1808-70-STR |
| HCPL-0630-500 | MA009-01 |
| HD64F7145F50 | HD64F7145F50 |
| LM45BIM3X | LM45BIM3X |
| LM45BIM3X/NOPB | LM45BIM3X |
| MC100LVEL11DTR2 | MC10EL11DR2 |
| MC100LVEL16DTR2 | MC10EL16DR2 |
| MC10EP57DTR2 | MC10EP57DTR2 |
| MC14053BDTR2 | MC74HC4053F |
| MC74HC4046ADTR2 | CD4046BE |
| MT48LC8M16A2P-75-Y15WTR | HY57V281620AT-P |
| NC7SZ04P5X | TC7S04F |
| NC7SZ32P5X | TC7S32F |
| NJM062V(TE2) | RC4558 |
| NJM062V(TE2) | RC4558 |
| NJM2903V(TE2) | UA393DC |
| NJM4558V-TE2 | RC4558 |
| NJM4580V(TE2) | RC4558 |
| NJM78M05DL1A-TE1 | NJM78M12DLA_TE1 |
| SN74CBT3253PWR-12 | SN74CBT3253PW-E20 |
| SN74LVC04APWR | TC74HC04P |
| SN74LVC08APWR | TC74HC08P |
| SN74LVC125APWR-12 | MC74HC125N |
| SN74LVC138APWR-12 | TC74HC138P |
| SN74LVC245APWR | TC74HC245P |
| SN74LVC574APWR | TC74HC574P |
| SN74LVC74APWR-12 | TC74HC74P |
| TA78L09F-TE12L | NJM78L12UA |
| TC4W66FU(TE12R) | TC4W66F |
| TC74HC4052AFT(EL) | MC74HC4052N |
| TC74HC4053AFT(EL) | MC74HC4053F |
| TC74HC4538AFT(EL) | MC74HC4538N |
| TC74VHC02FT(EL) | TC74HC02P |
| TC74VHC125FT(EL) | MC74HC125N |
| TC74VHC244FT(EL) | TC74HC244P |
| TC74VHC86FT(EL) | TC74HC86P |
| TC7SZ00FU(TE85R) | TC7S00F |
| TC7SZ02FU(TE85R) | TC4S01F |
| TC7SZ04FU(TE85R) | TC7S04F |
| TC7SZ08FU(TE85R) | TC7S08F |
| TC7SZ125FU(TE85R) | NC7SZ125P5 |
| TC7SZ126FU(TE85R) | NC7SZ126P5 |
| TC7W53FU(TE12R) | TC4W53FU |
| TC7WH04FK(TE85R) | TC7W04F |
| TC7WH04FU(TE12R) | TC7W04F |
| TC7WH08FK(TE85R) | TC7W08F |
| TC7WH157FU(TE12R) | TC7WH157FU_TE12R |
| TC7WH74FU(TE12R) | TC7W74FU |
| TLC272CPWR-12 | RC4558 |
| TPS54610PWPR | TPS54610PWPR |
| UPD6467GR-525-E2 | UPD6466GS-502-E2 |

# Section 6
# Block Diagrams

## Index


| Board Name | Function | Page |
|---|---|---|
| Overall | – | 6-2 |
| AT-167S | SYSTEM CONTROLLER | 6-3 |
| AU-302 | FRONT INTERCOM INTERFACE | 6-5 |
| AVP-6 | AUDIO, TALLY | 6-6 |
| CN-2674G | CONNECTOR (VBS/PROMPTER) | 6-15 |
| CPU-395 | CPU UNIT | 6-7 |
| DPR-271A | VIDEO PROCESSOR UNIT | 6-9 |
| DPR-271B | VIDEO PROCESSOR UNIT | 6-10 |
| DRX-5 | VIDEO PROCESSOR | 6-11 |
| DTX-5 | HD/SD/VBS RETURN SIGNAL CONVERTER | 6-12 |
| EN-159A | SD ENCODER UNIT | 6-13 |
| EN-159B | SD ENCODER & COMPONENT VIDEO UNIT | 6-13 |
| HIF-25 | SDI OUTPUT | 6-14 |
| HIF-26 | SDI OUTPUT | 6-14 |
| HIF-27 | SDI OUTPUT | 6-14 |
| SDI-85 | RETURN HD INPUT | 6-14 |
| SDI-86G | RETURN SD INPUT | 6-15 |
| SDP-15 | OPTICAL INTERFACE | 6-16 |
| VDA-64A | SD ANALOG VIDEO OUTPUT | 6-17 |
| VDA-64B | FRAME REFERENCE INPUT & SD ANALOG VIDEO OUTPUT | 6-17 |
| VIF-34G | CONNECTOR INTERFACE | 6-18 |


## Board List

| Board Name | HDCU3300 | HKCU1001 | HKCU1003 | HKCU1005 |
|---|---|---|---|---|
| ADO-10G | ○ | – | – | – |
| AT-167S | ○ | – | – | – |
| AU-302 | ○ | – | – | – |
| AVP-6 | ○ | – | – | – |
| CN-2672G | ○ | – | – | – |
| CN-2673 | ○ | – | – | – |
| CN-2674G | ○ | – | – | – |
| CN-2700 | ○ | – | – | – |
| CN-2718 | ○ | – | – | – |
| CN-2805G | ○ | – | – | – |
| CNB-21G | ○ | – | – | – |
| CPU-395 | ○ | – | – | – |
| DPR-271A | ○ | – | – | – |
| DPR-271B | ○ | – | – | – |
| DRX-5 | ○ | – | – | ○ |
| DTX-5 | ○ | – | – | – |
| EN-159A | – | ○ | – | – |
| EN-159B | – | – | ○ | – |
| HIF-25 | ○ | – | – | – |
| HIF-26 | ○ | – | – | ○ |
| HIF-27 | ○ | – | – | – |
| MB-1073 | ○ | – | – | – |
| OTR-1 | ○ | – | – | – |
| SDI-85 | ○ | – | – | – |
| SDI-86G | ○ | – | – | – |
| SDP-15 | ○ | – | – | – |
| VDA-64A | – | ○ | ○ | – |
| VDA-64B | – | – | ○ | – |
| VIF-34G | ○ | – | – | – |

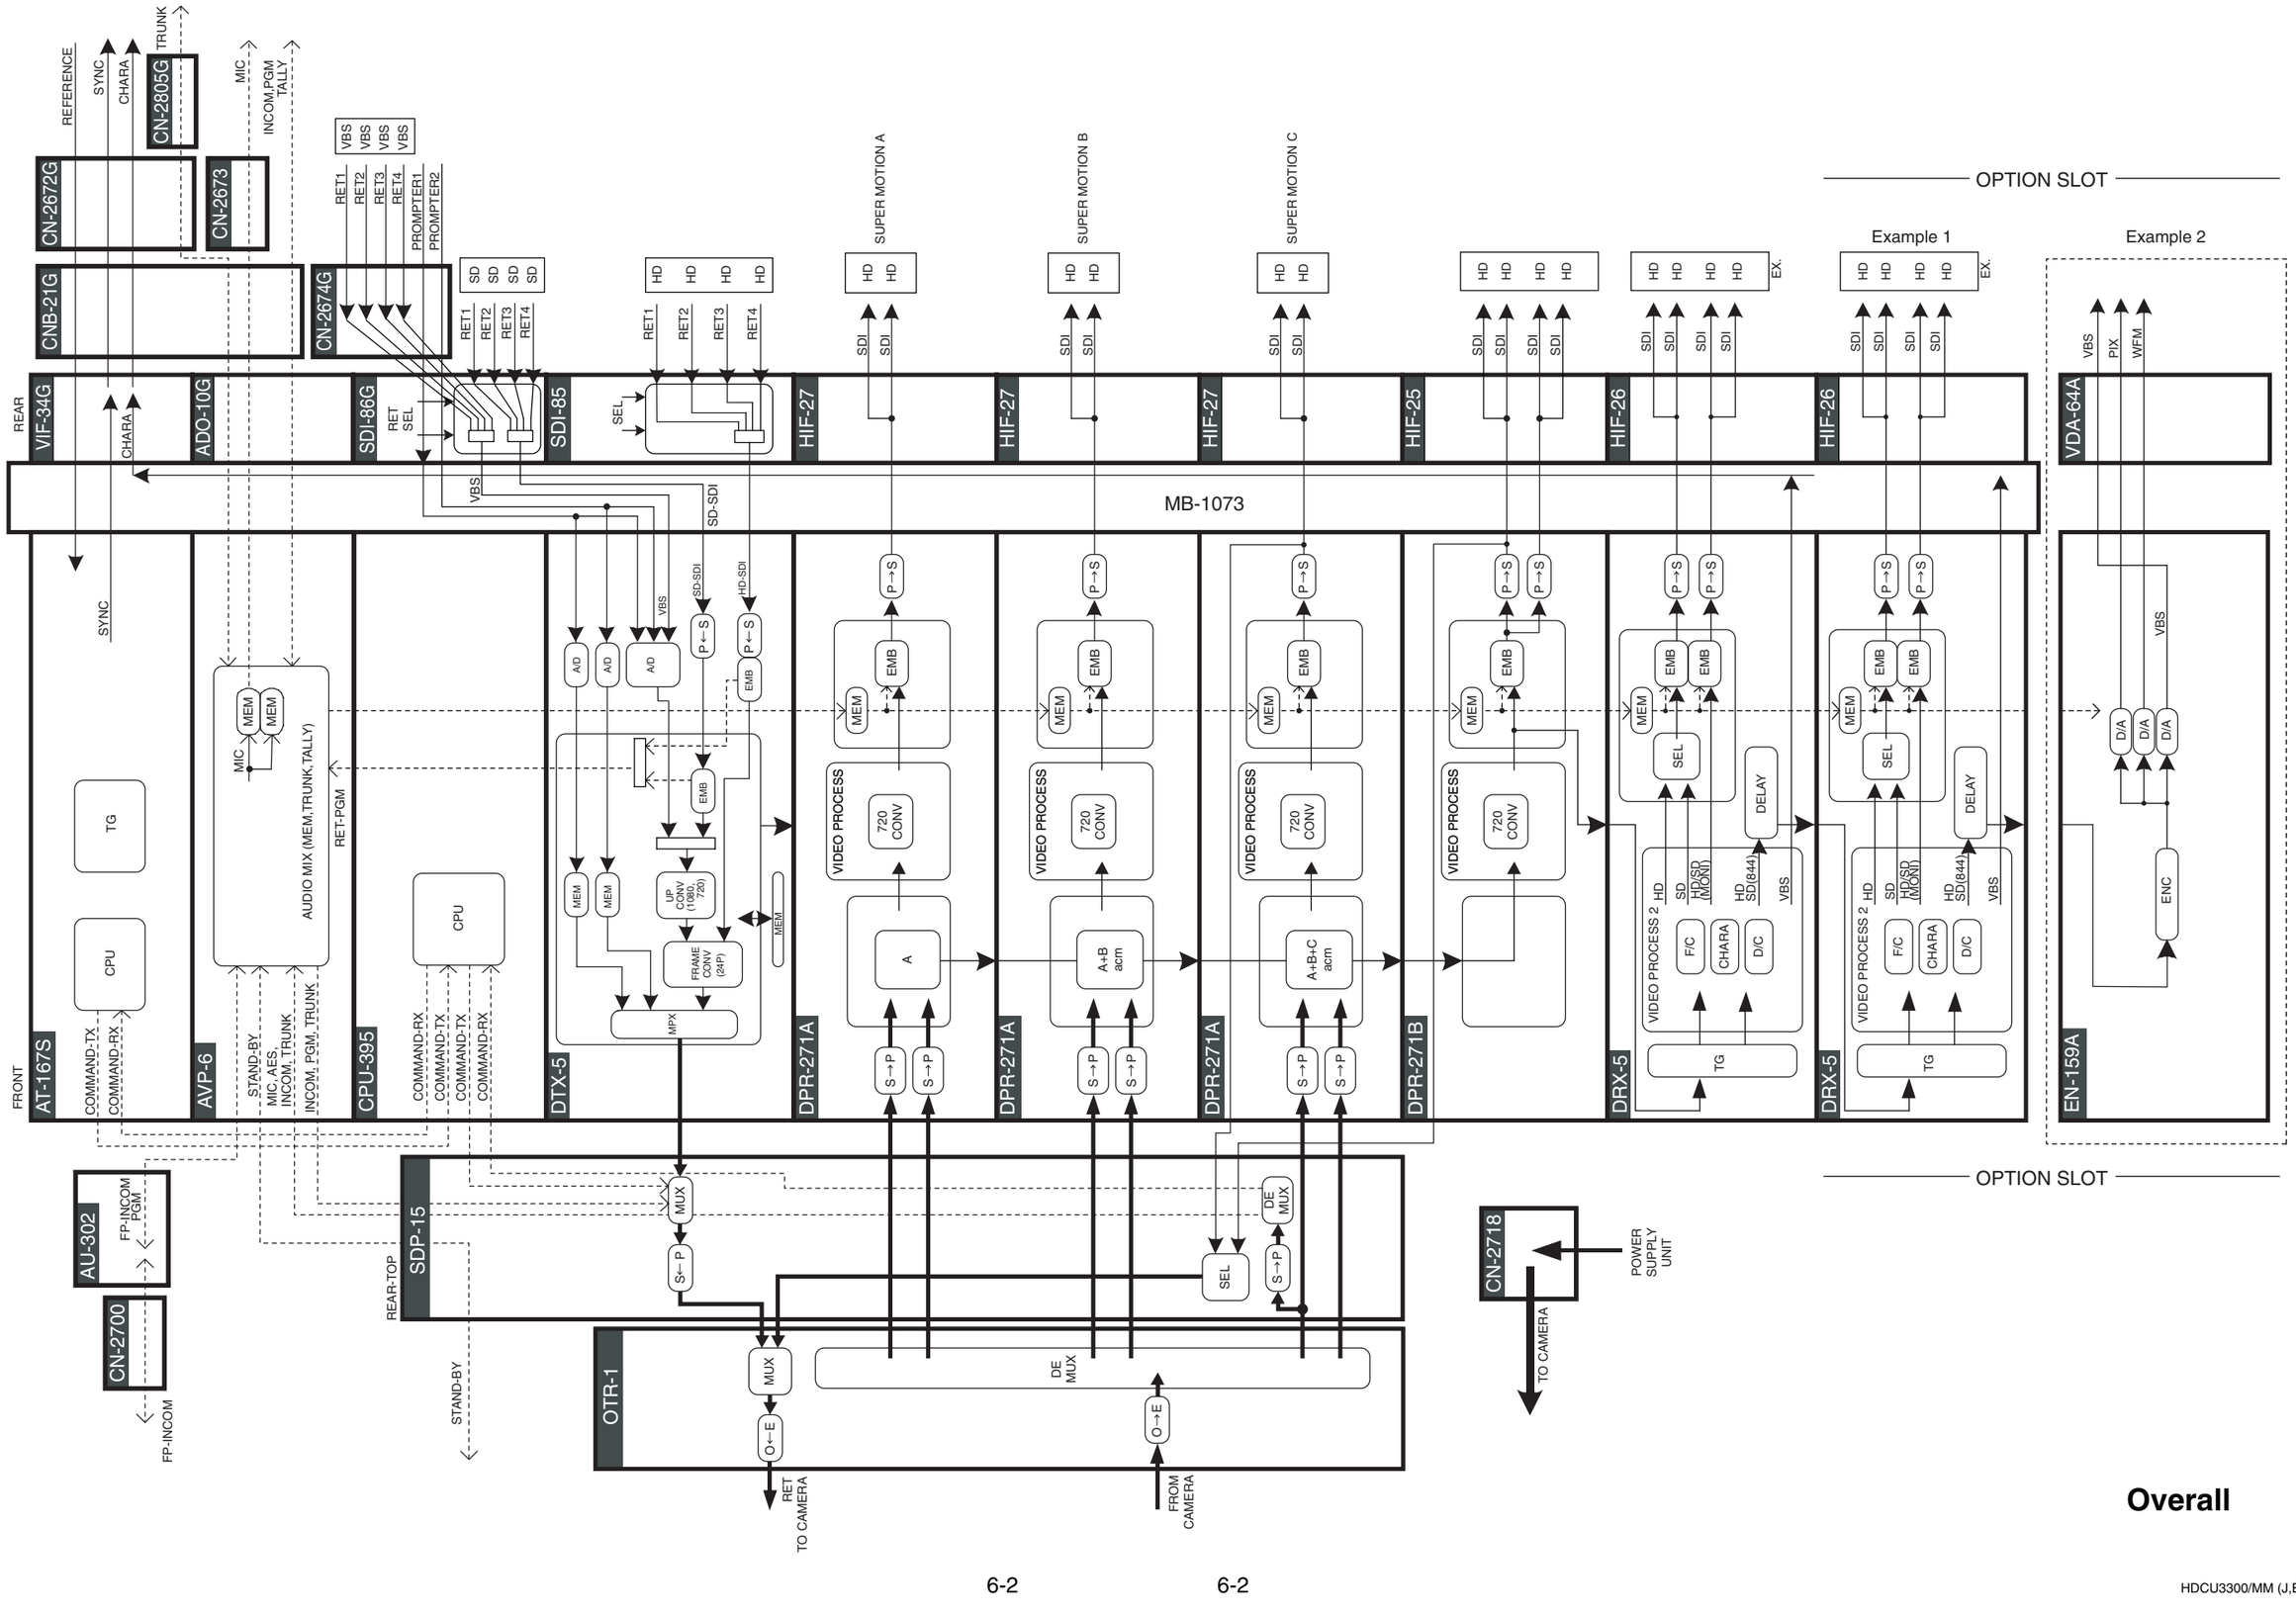
REFERENCE
SYNC
CHARA
TRUNK
CN-2805G
MIC
INCOM,PGM
TALLY
CN-2672G
CN-2673
CNB-21G
CN-2674G
VBS
RET1
RET2
RET3
RET4
PROMPTER1
PROMPTER2
SD
HD
SUPER MOTION A
SUPER MOTION B
SUPER MOTION C
OPTION SLOT
Example 1
Example 2
REAR
VIF-34G
ADO-10G
SDI-86G
RET
SEL
SDI-85
HIF-27
HIF-25
HIF-26
EX.
VDA-64A
PIX
WFM
MB-1073
SD-SDI
HD-SDI
A/D
P→S
S←P
EMB
MEM
SEL
VIDEO PROCESS
720 CONV
A
A+B acm
A+B+C acm
DELAY
VIDEO PROCESS 2
F/C
CHARA
D/C
TG
CPU
AUDIO MIX (MEM,TRUNK,TALLY)
RET-PGM
LIP CONV (1080, 720)
FRAME CONV (24P)
MPX
D/A
ENC
FRONT
AT-167S
COMMAND-TX
COMMAND-RX
AVP-6
STAND-BY
MIC, AES,
INCOM, TRUNK
INCOM, PGM, TRUNK
CPU-395
DTX-5
DPR-271A
DPR-271B
DRX-5
EN-159A
AU-302
FP-INCOM PGM
CN-2700
FP-INCOM
SDP-15
REAR-TOP
MUX
DE MUX
OTR-1
O←E
O→E
RET TO CAMERA
FROM CAMERA
CN-2718
POWER SUPPLY UNIT
TO CAMERA



Overall

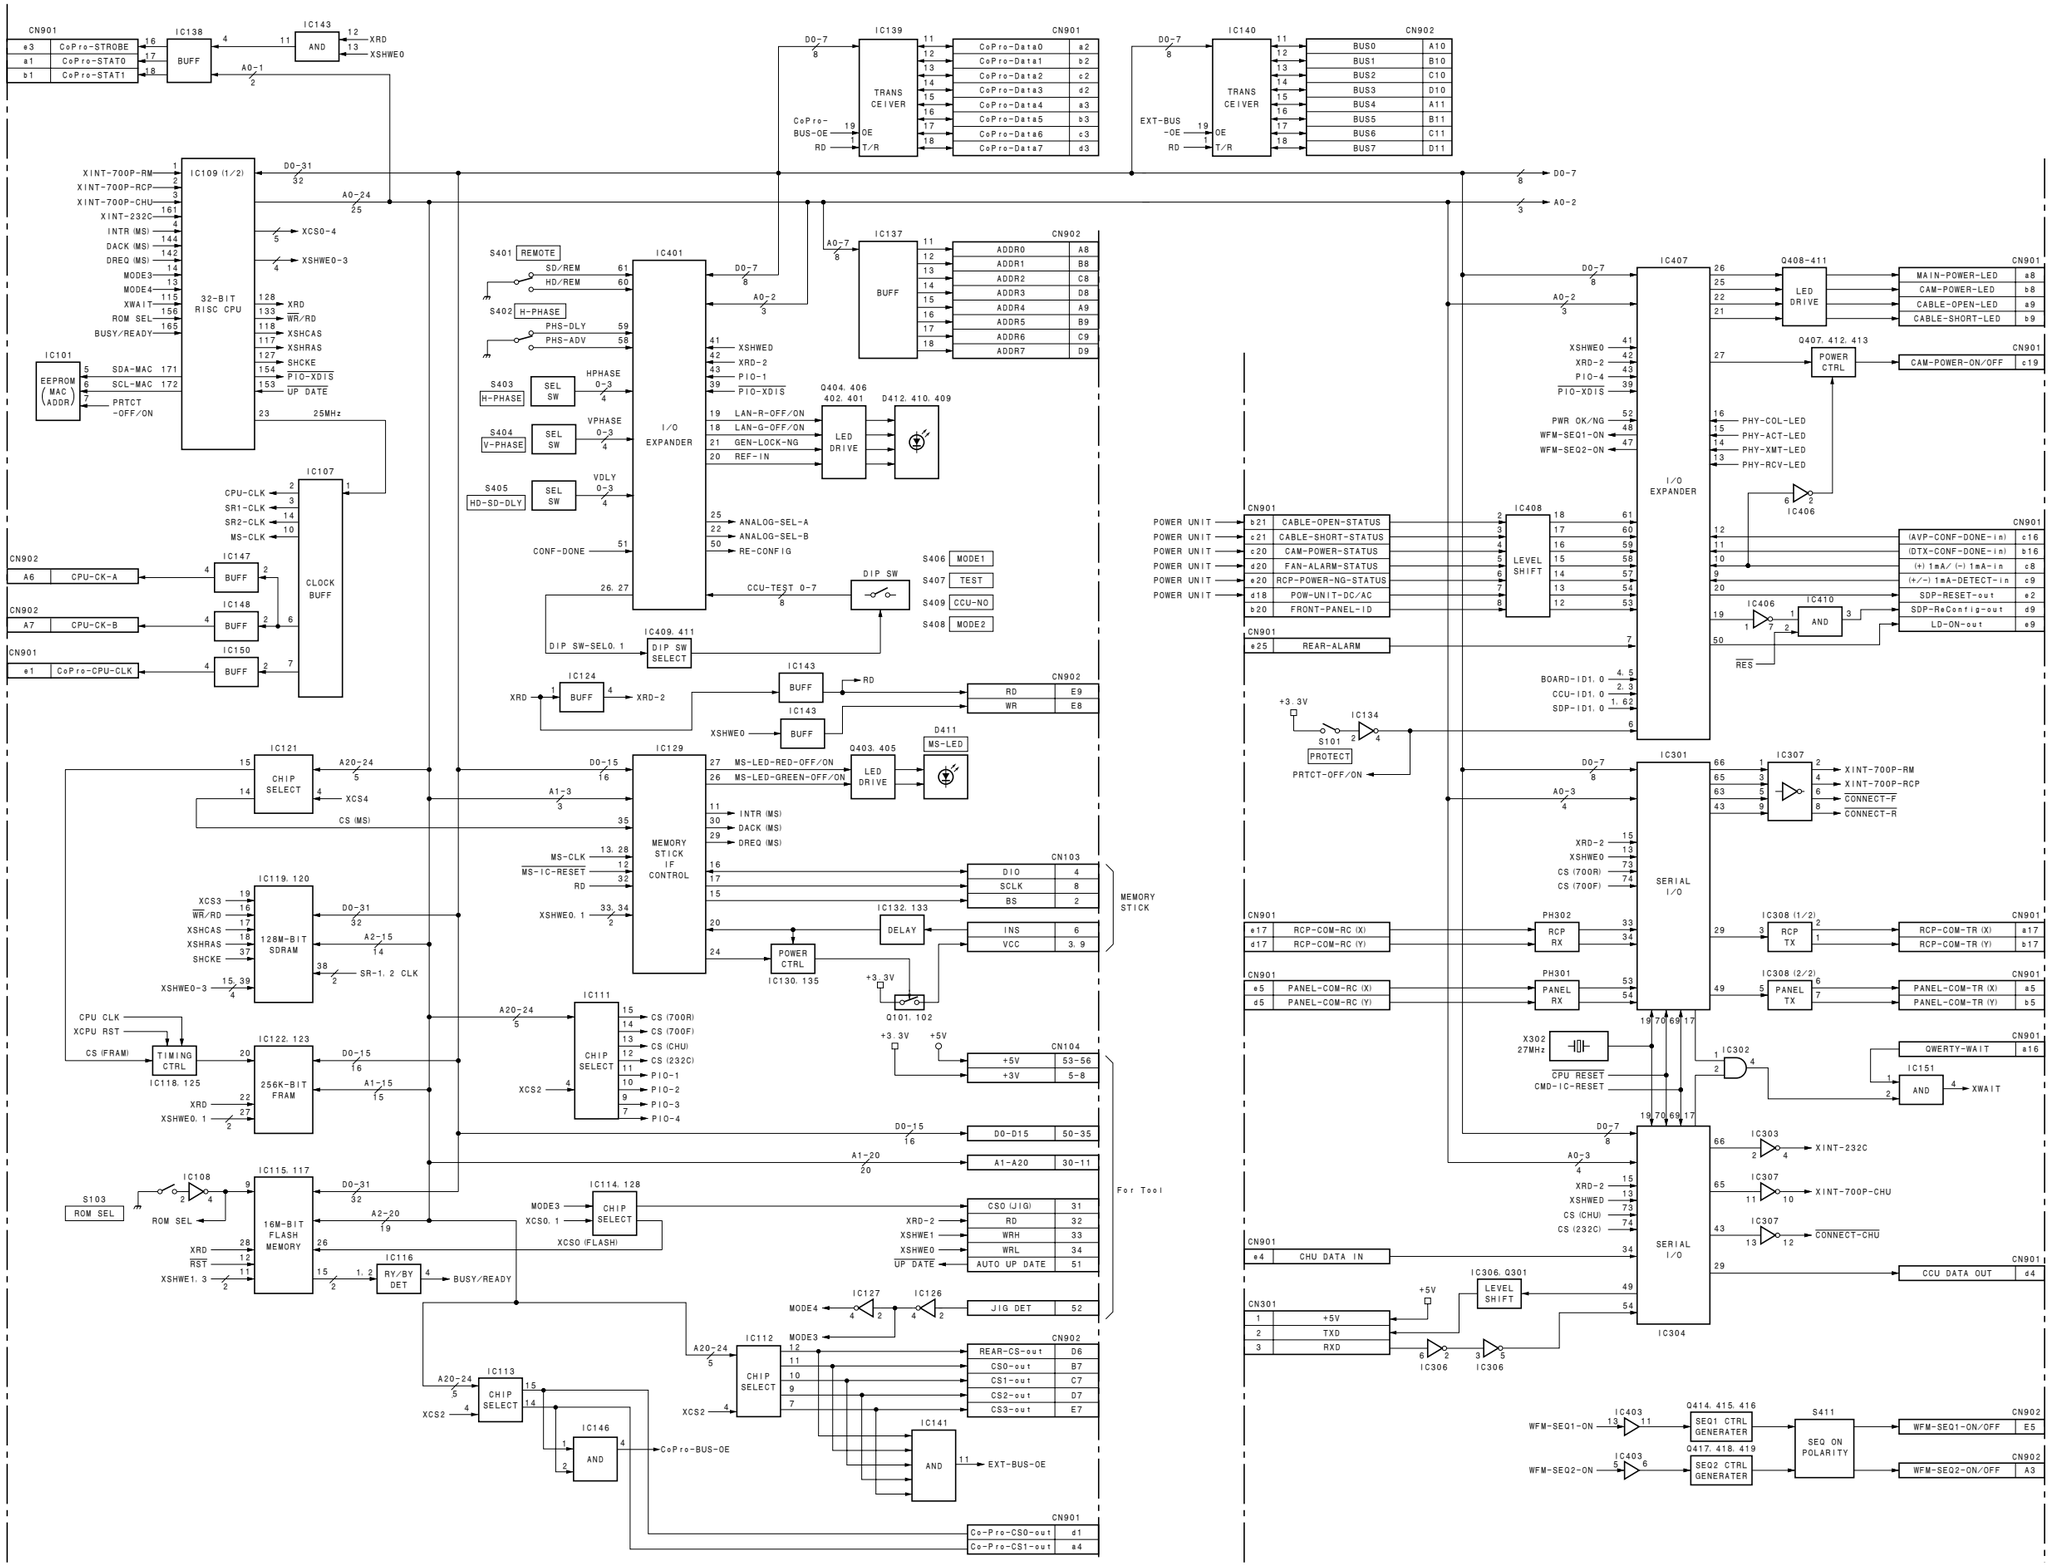


SYSTEM CONTROLLER
**AT-167S (1/2)**

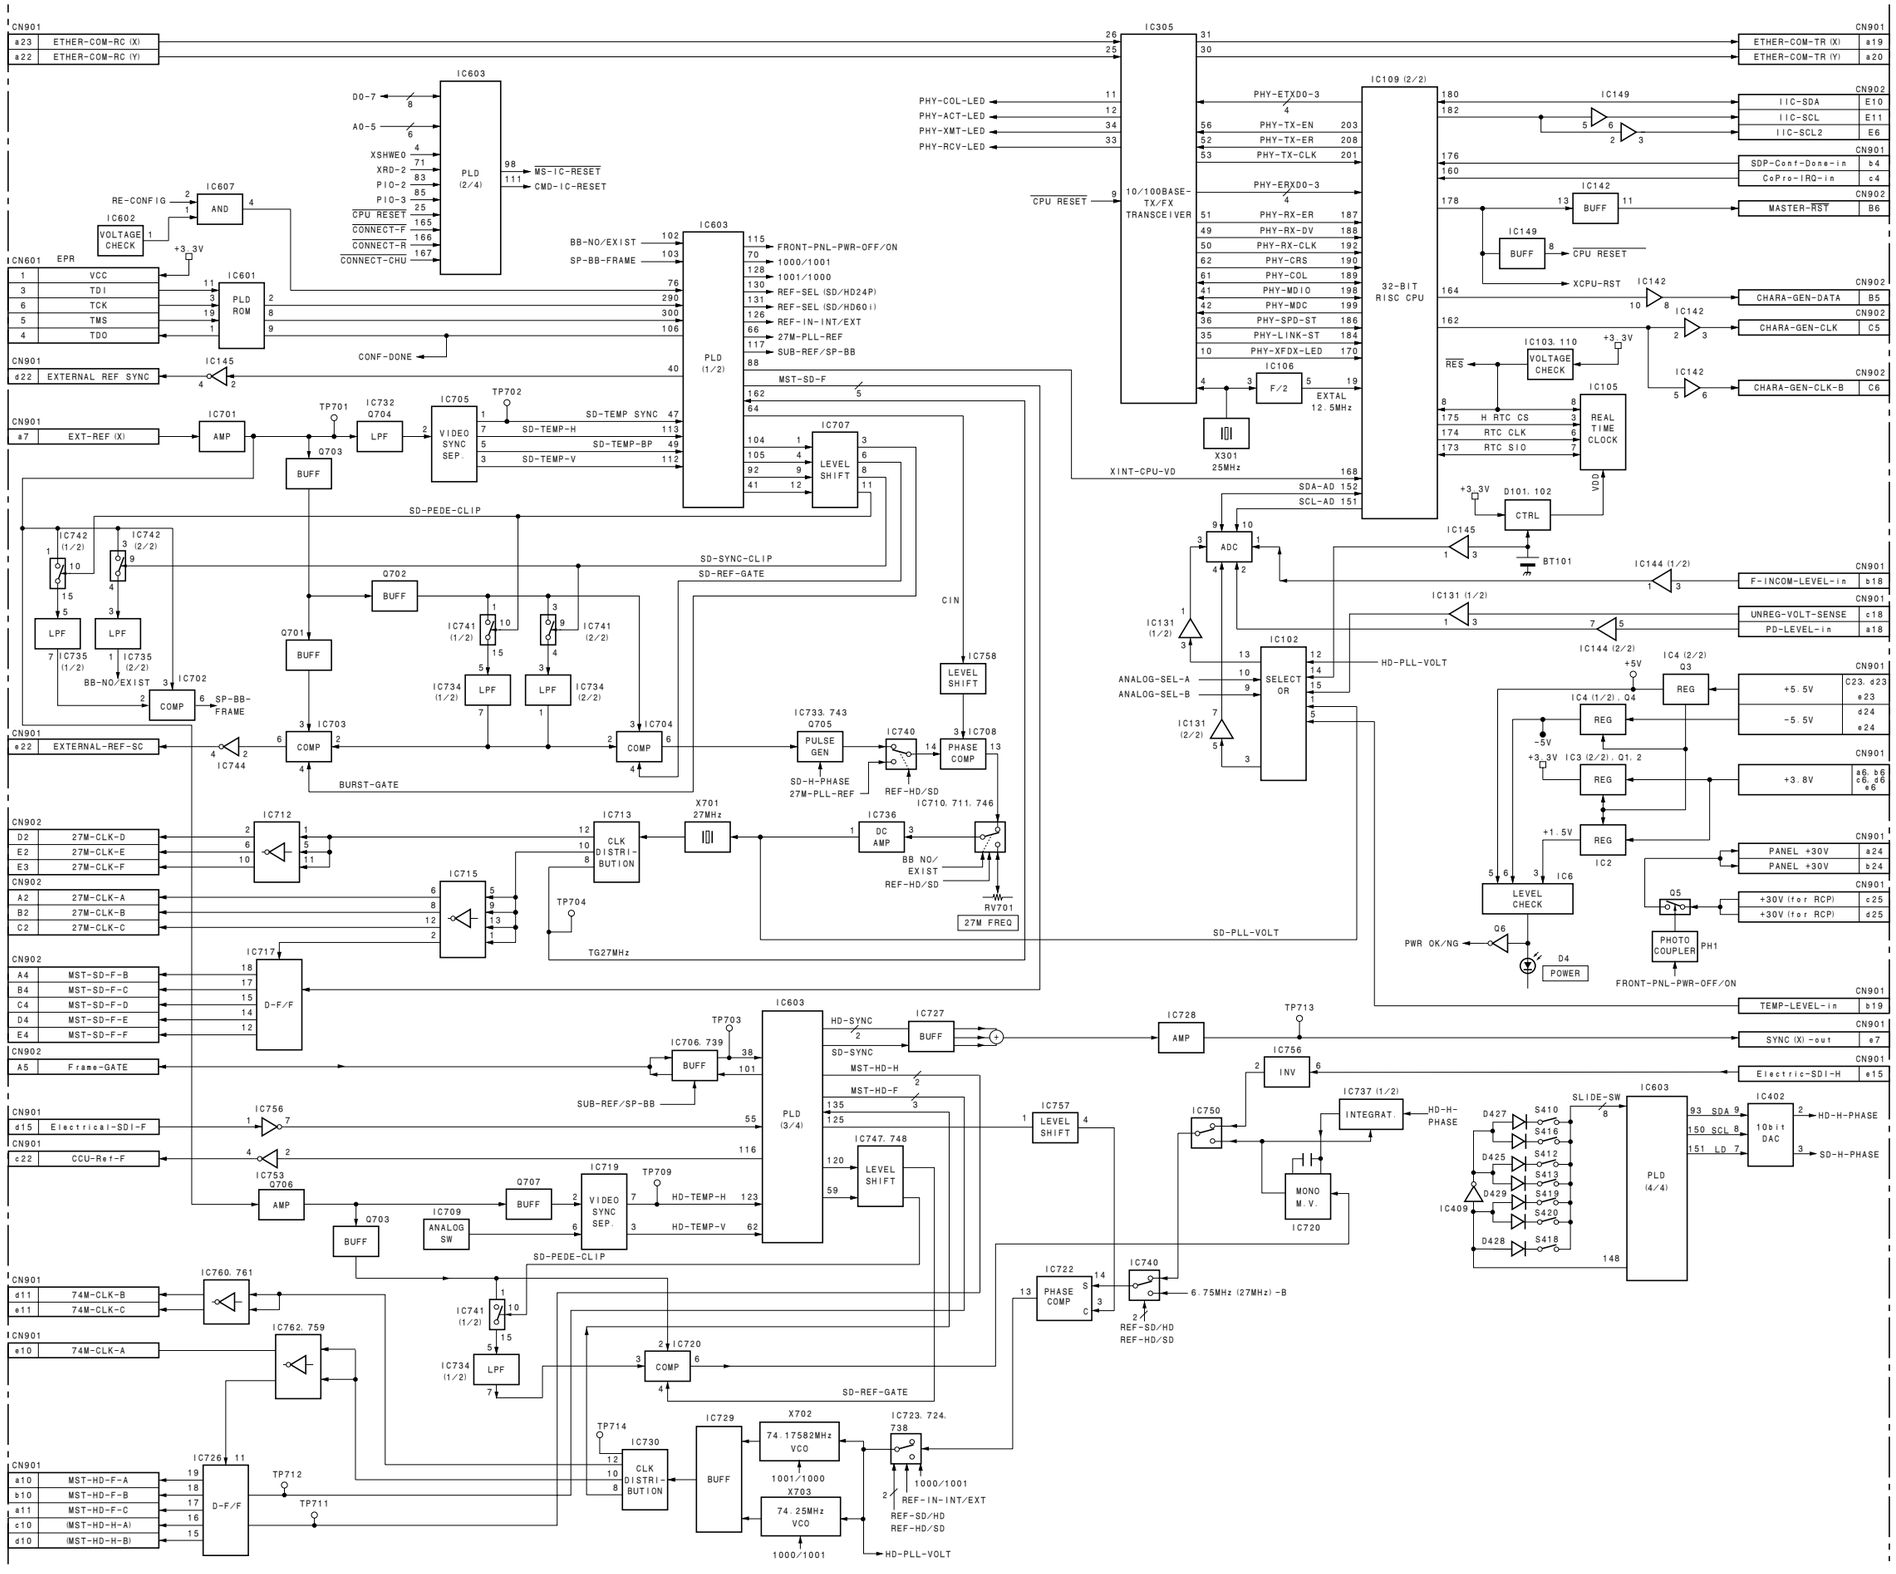


SYSTEM CONTROLLER
**AT-167S (2/2)**

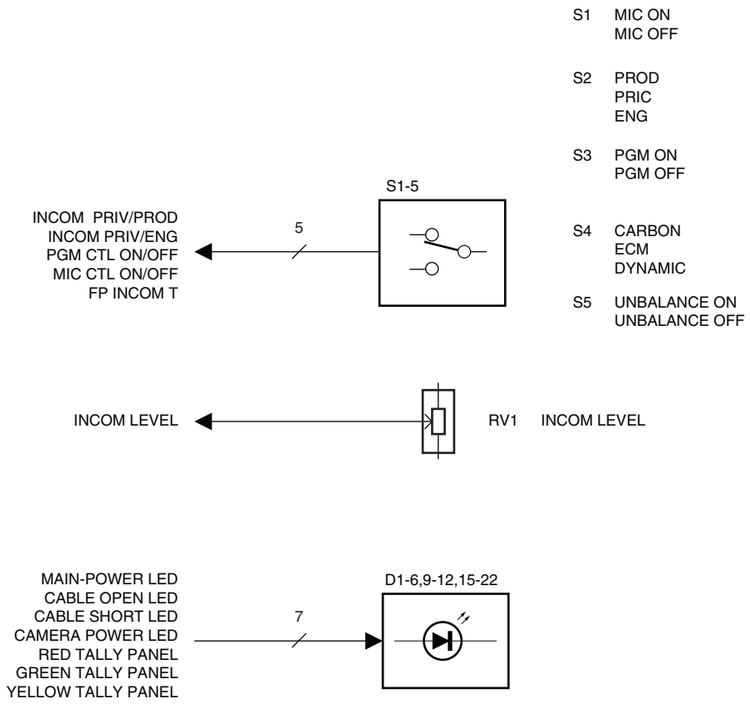
S1 MIC ON
MIC OFF
S2 PROD
PRIC
ENG
S3 PGM ON
PGM OFF
S4 CARBON
ECM
DYNAMIC
S5 UNBALANCE ON
UNBALANCE OFF
S1-5
INCOM PRIV/PROD
INCOM PRIV/ENG
PGM CTL ON/OFF
MIC CTL ON/OFF
FP INCOM T
5
INCOM LEVEL
RV1 INCOM LEVEL
MAIN-POWER LED
CABLE OPEN LED
CABLE SHORT LED
CAMERA POWER LED
RED TALLY PANEL
GREEN TALLY PANEL
YELLOW TALLY PANEL
7
D1-6,9-12,15-22

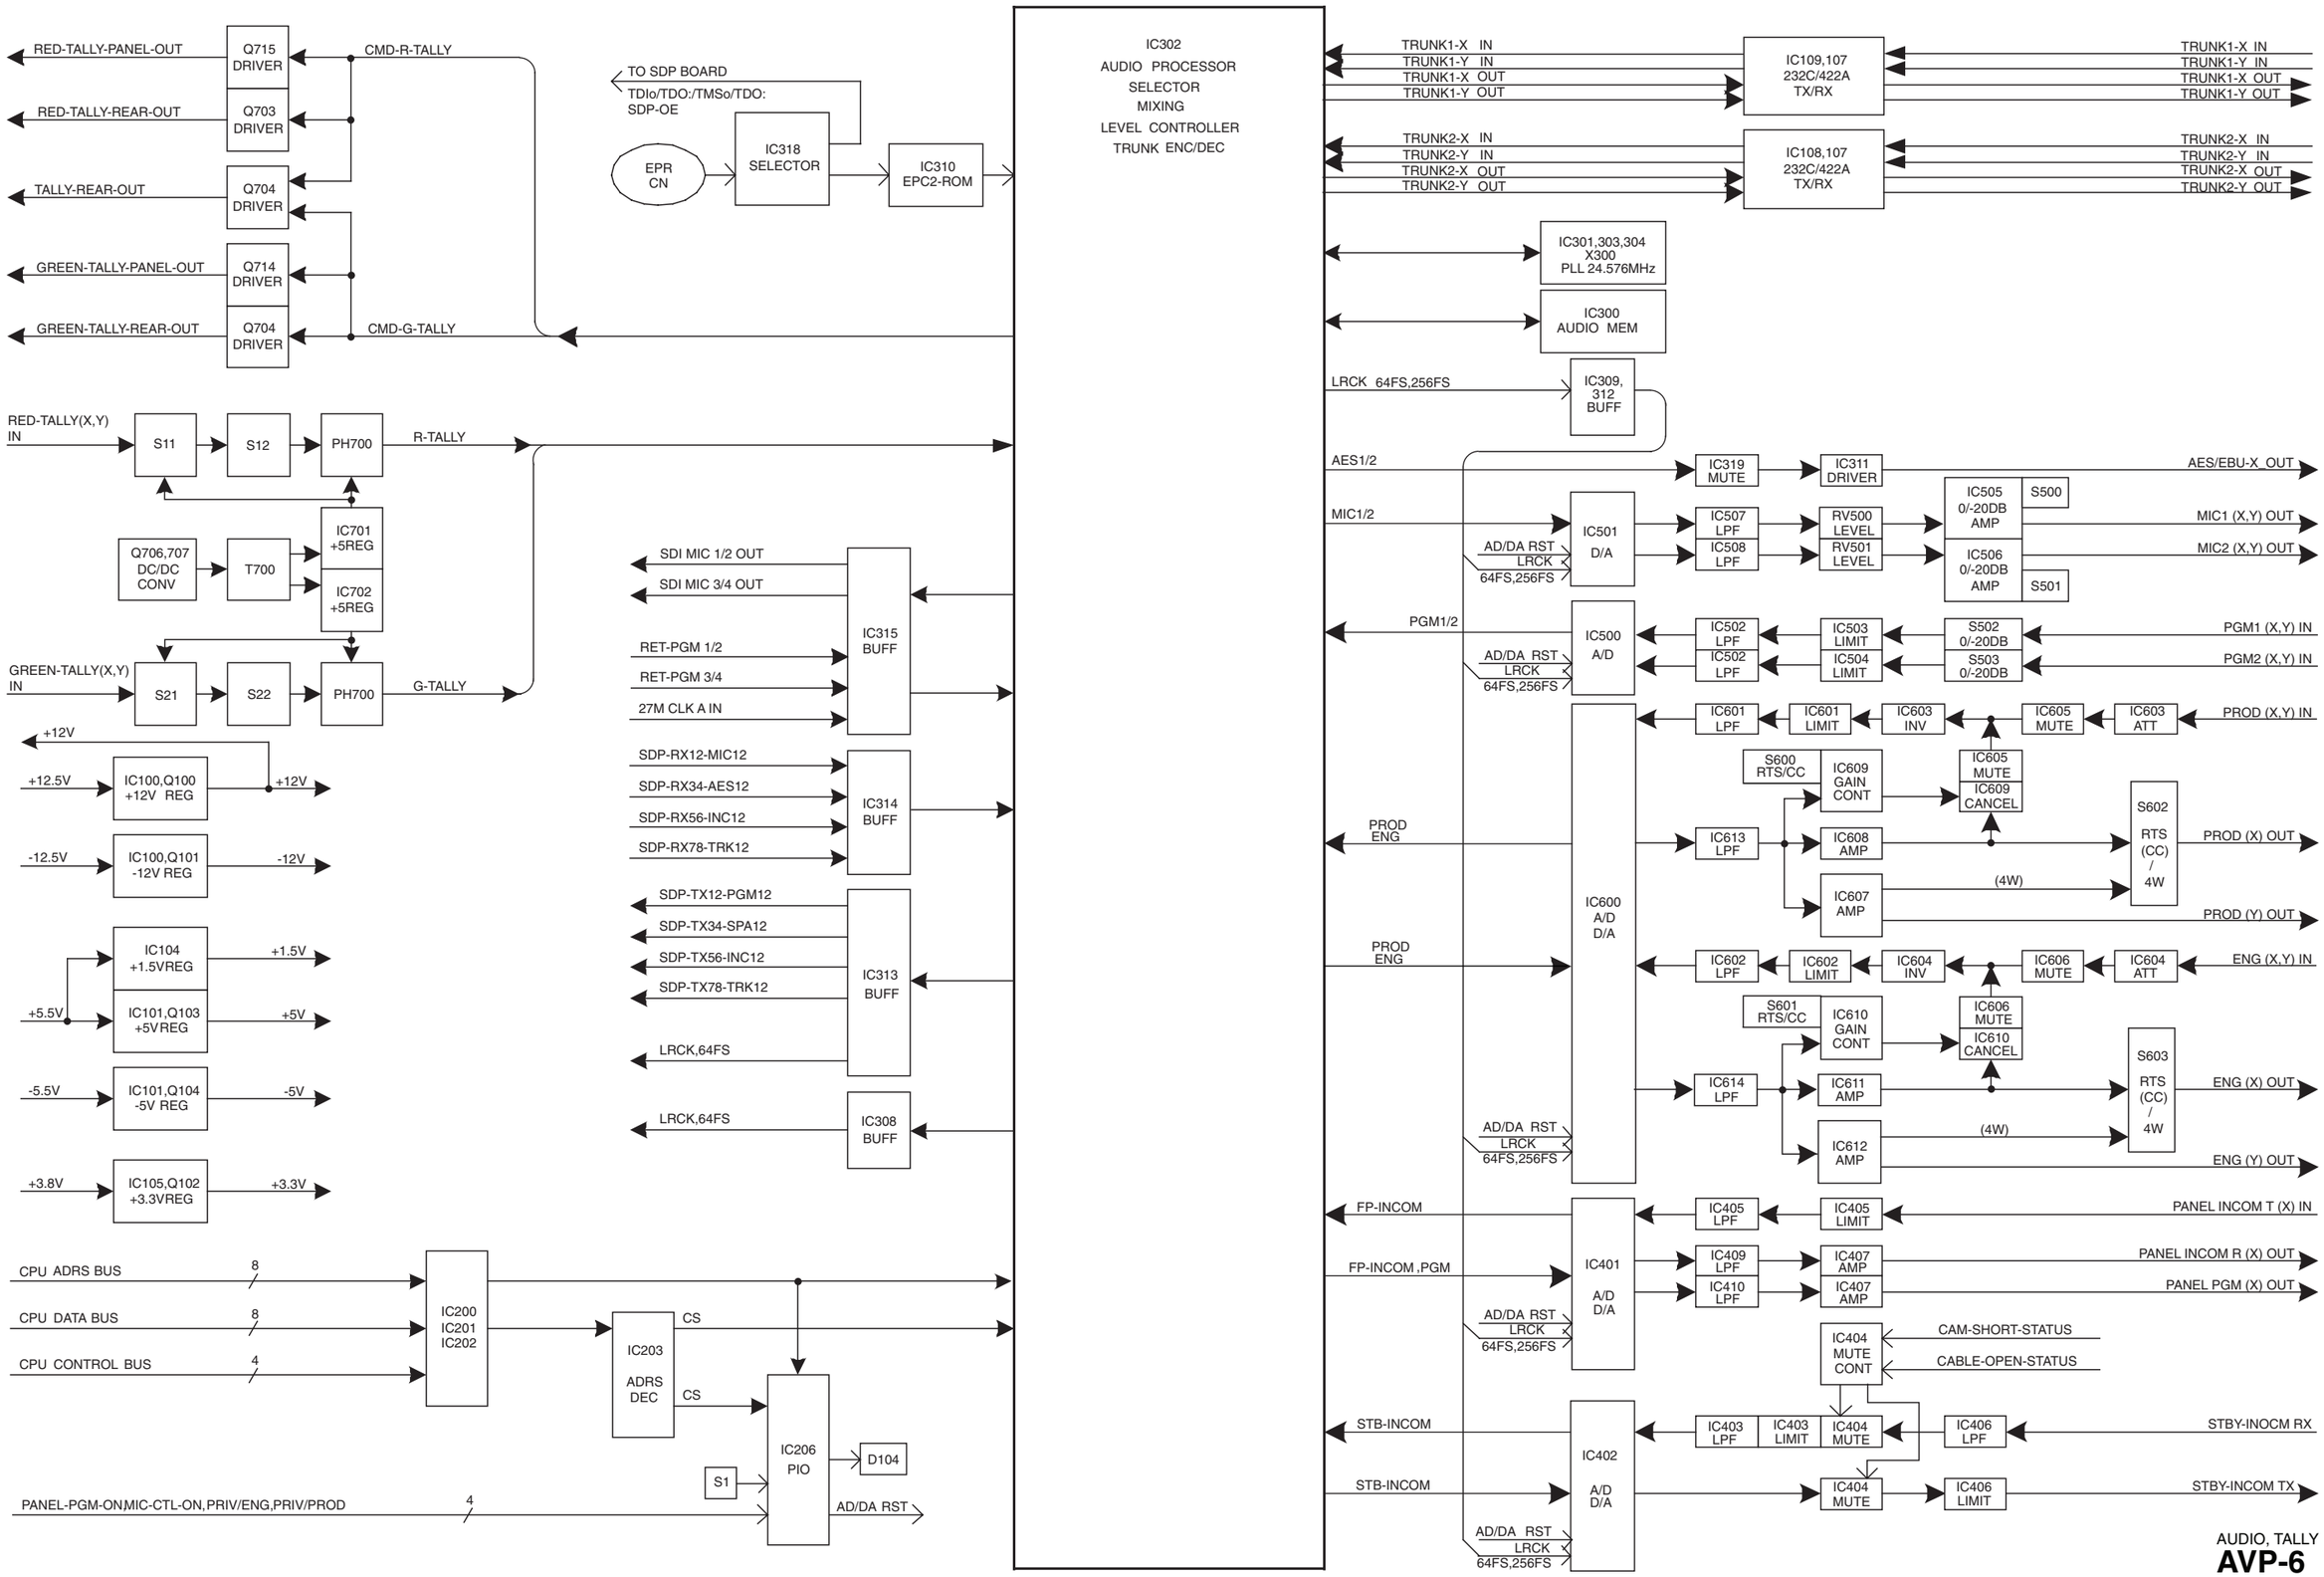


AUDIO, TALLY
**AVP-6**

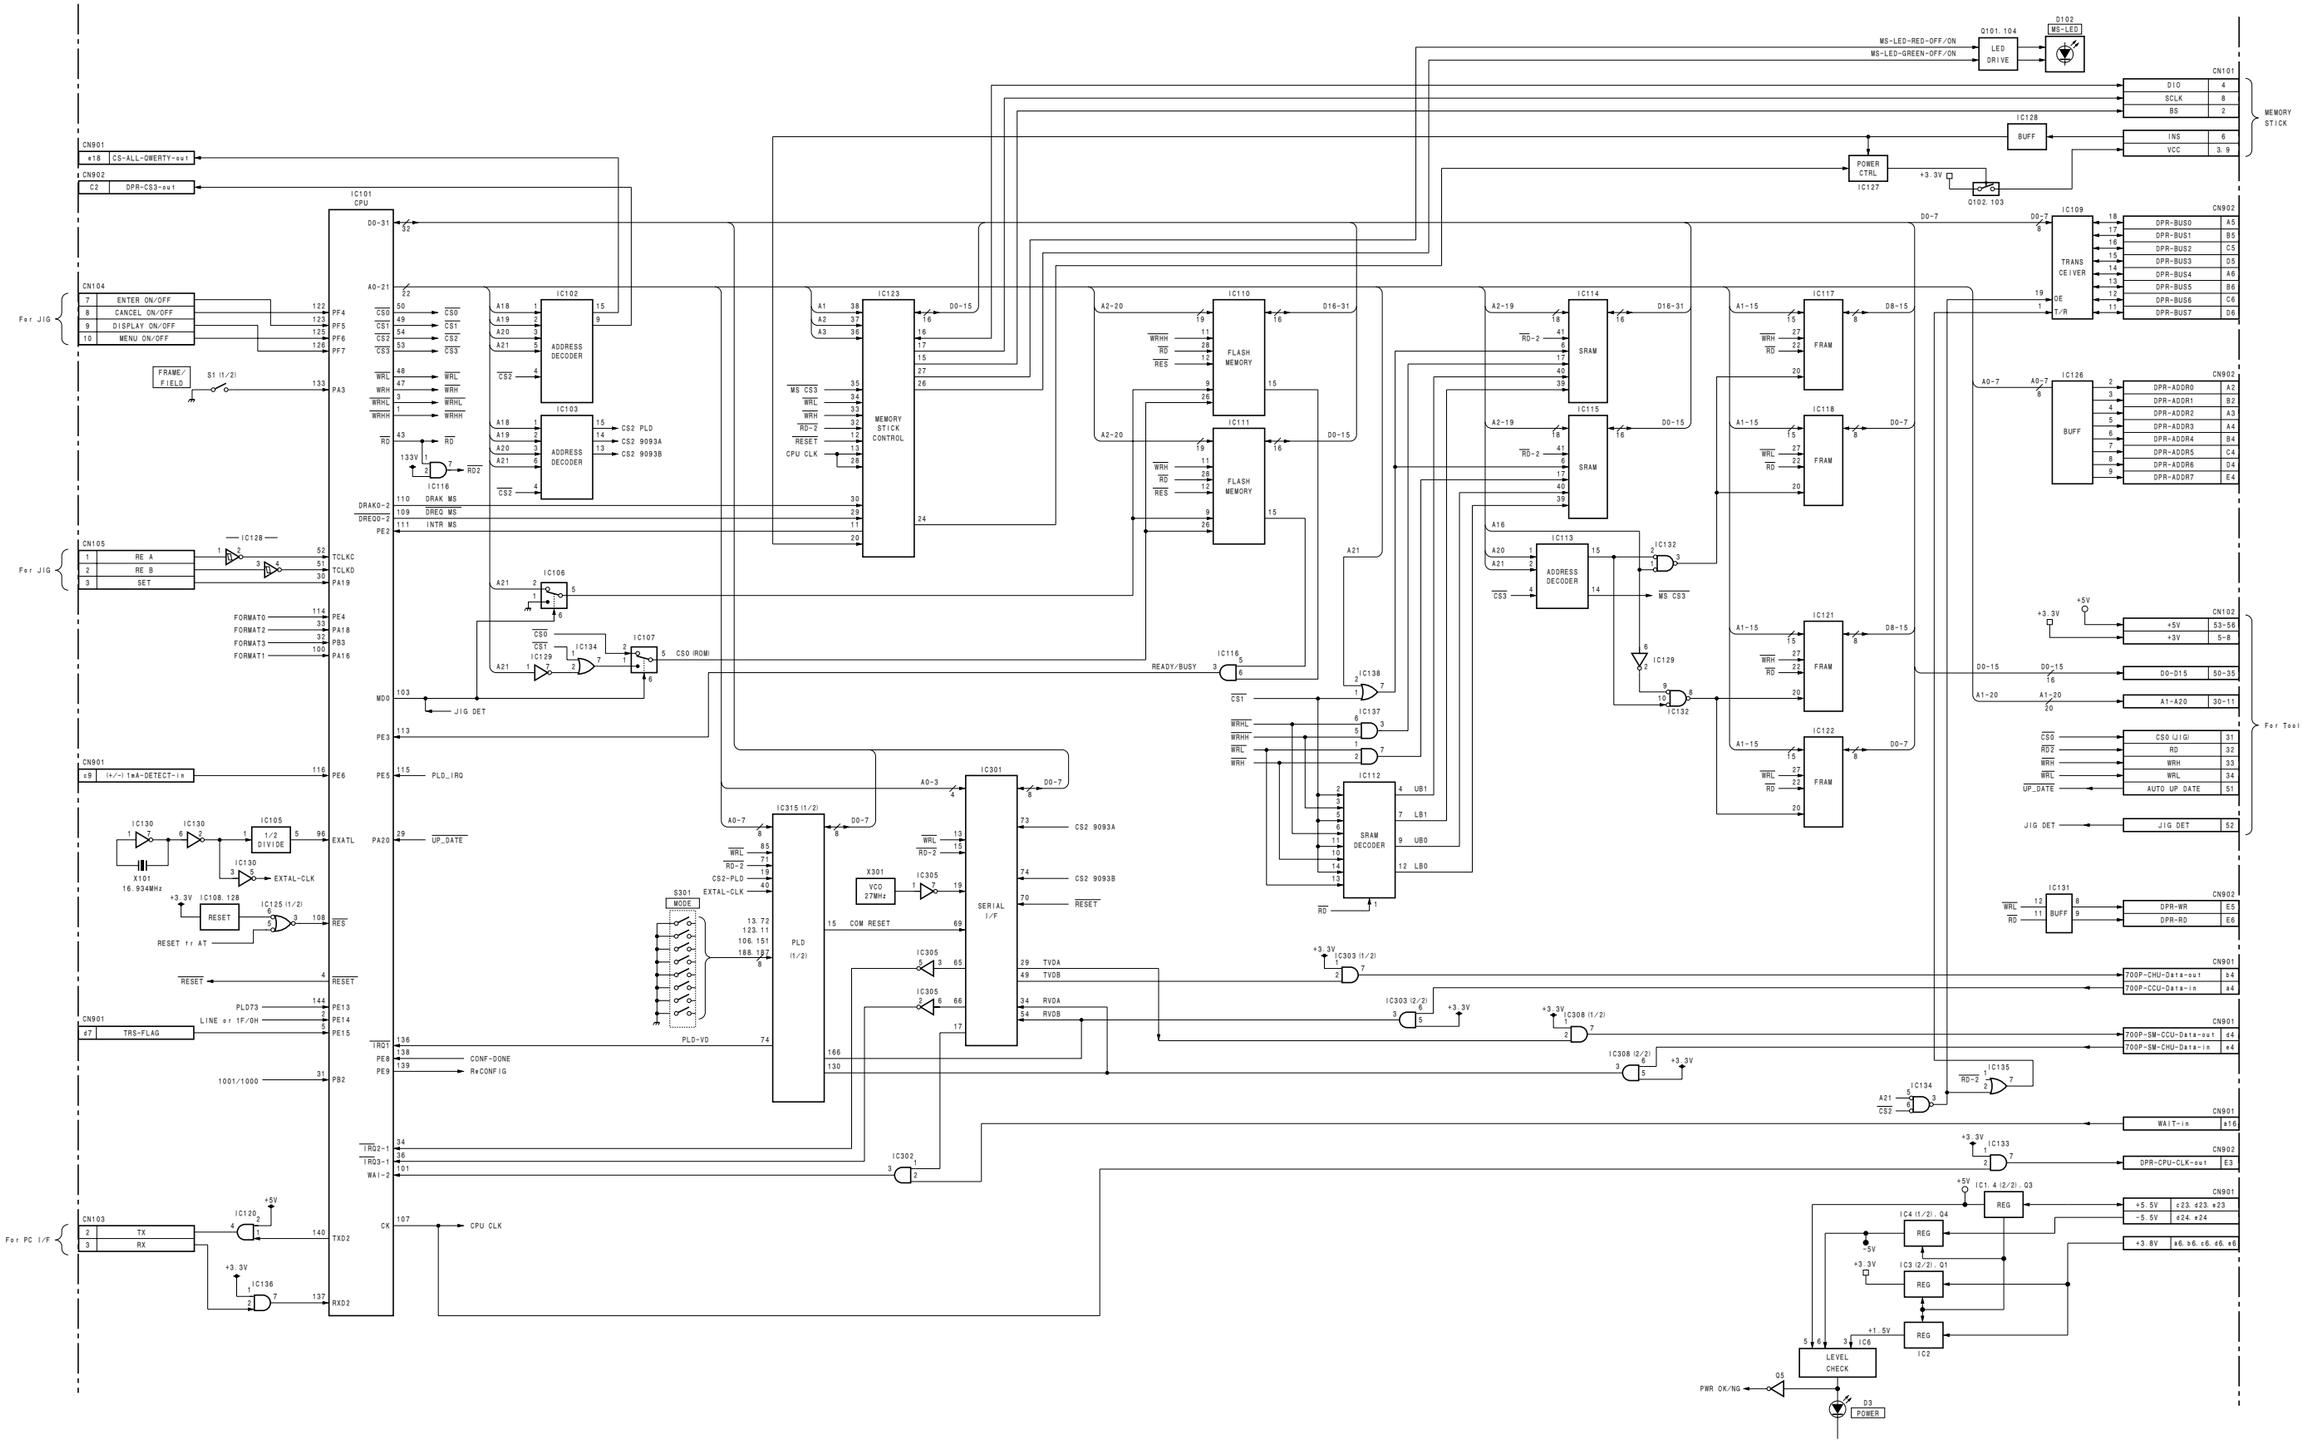


CPU UNIT
**CPU-395 (1/2)**

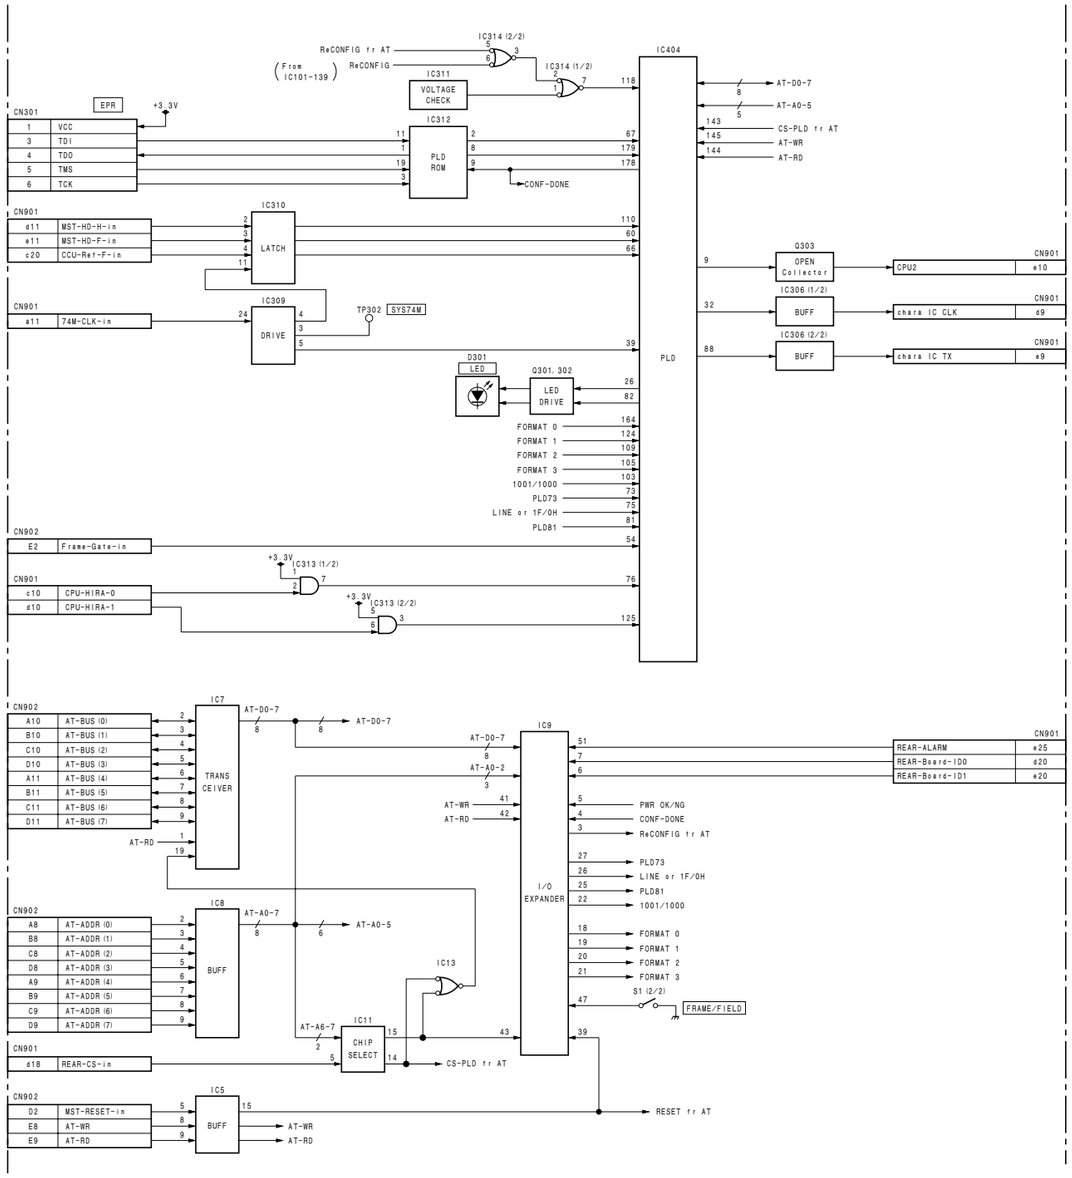


CPU UNIT
## CPU-395 (2/2)

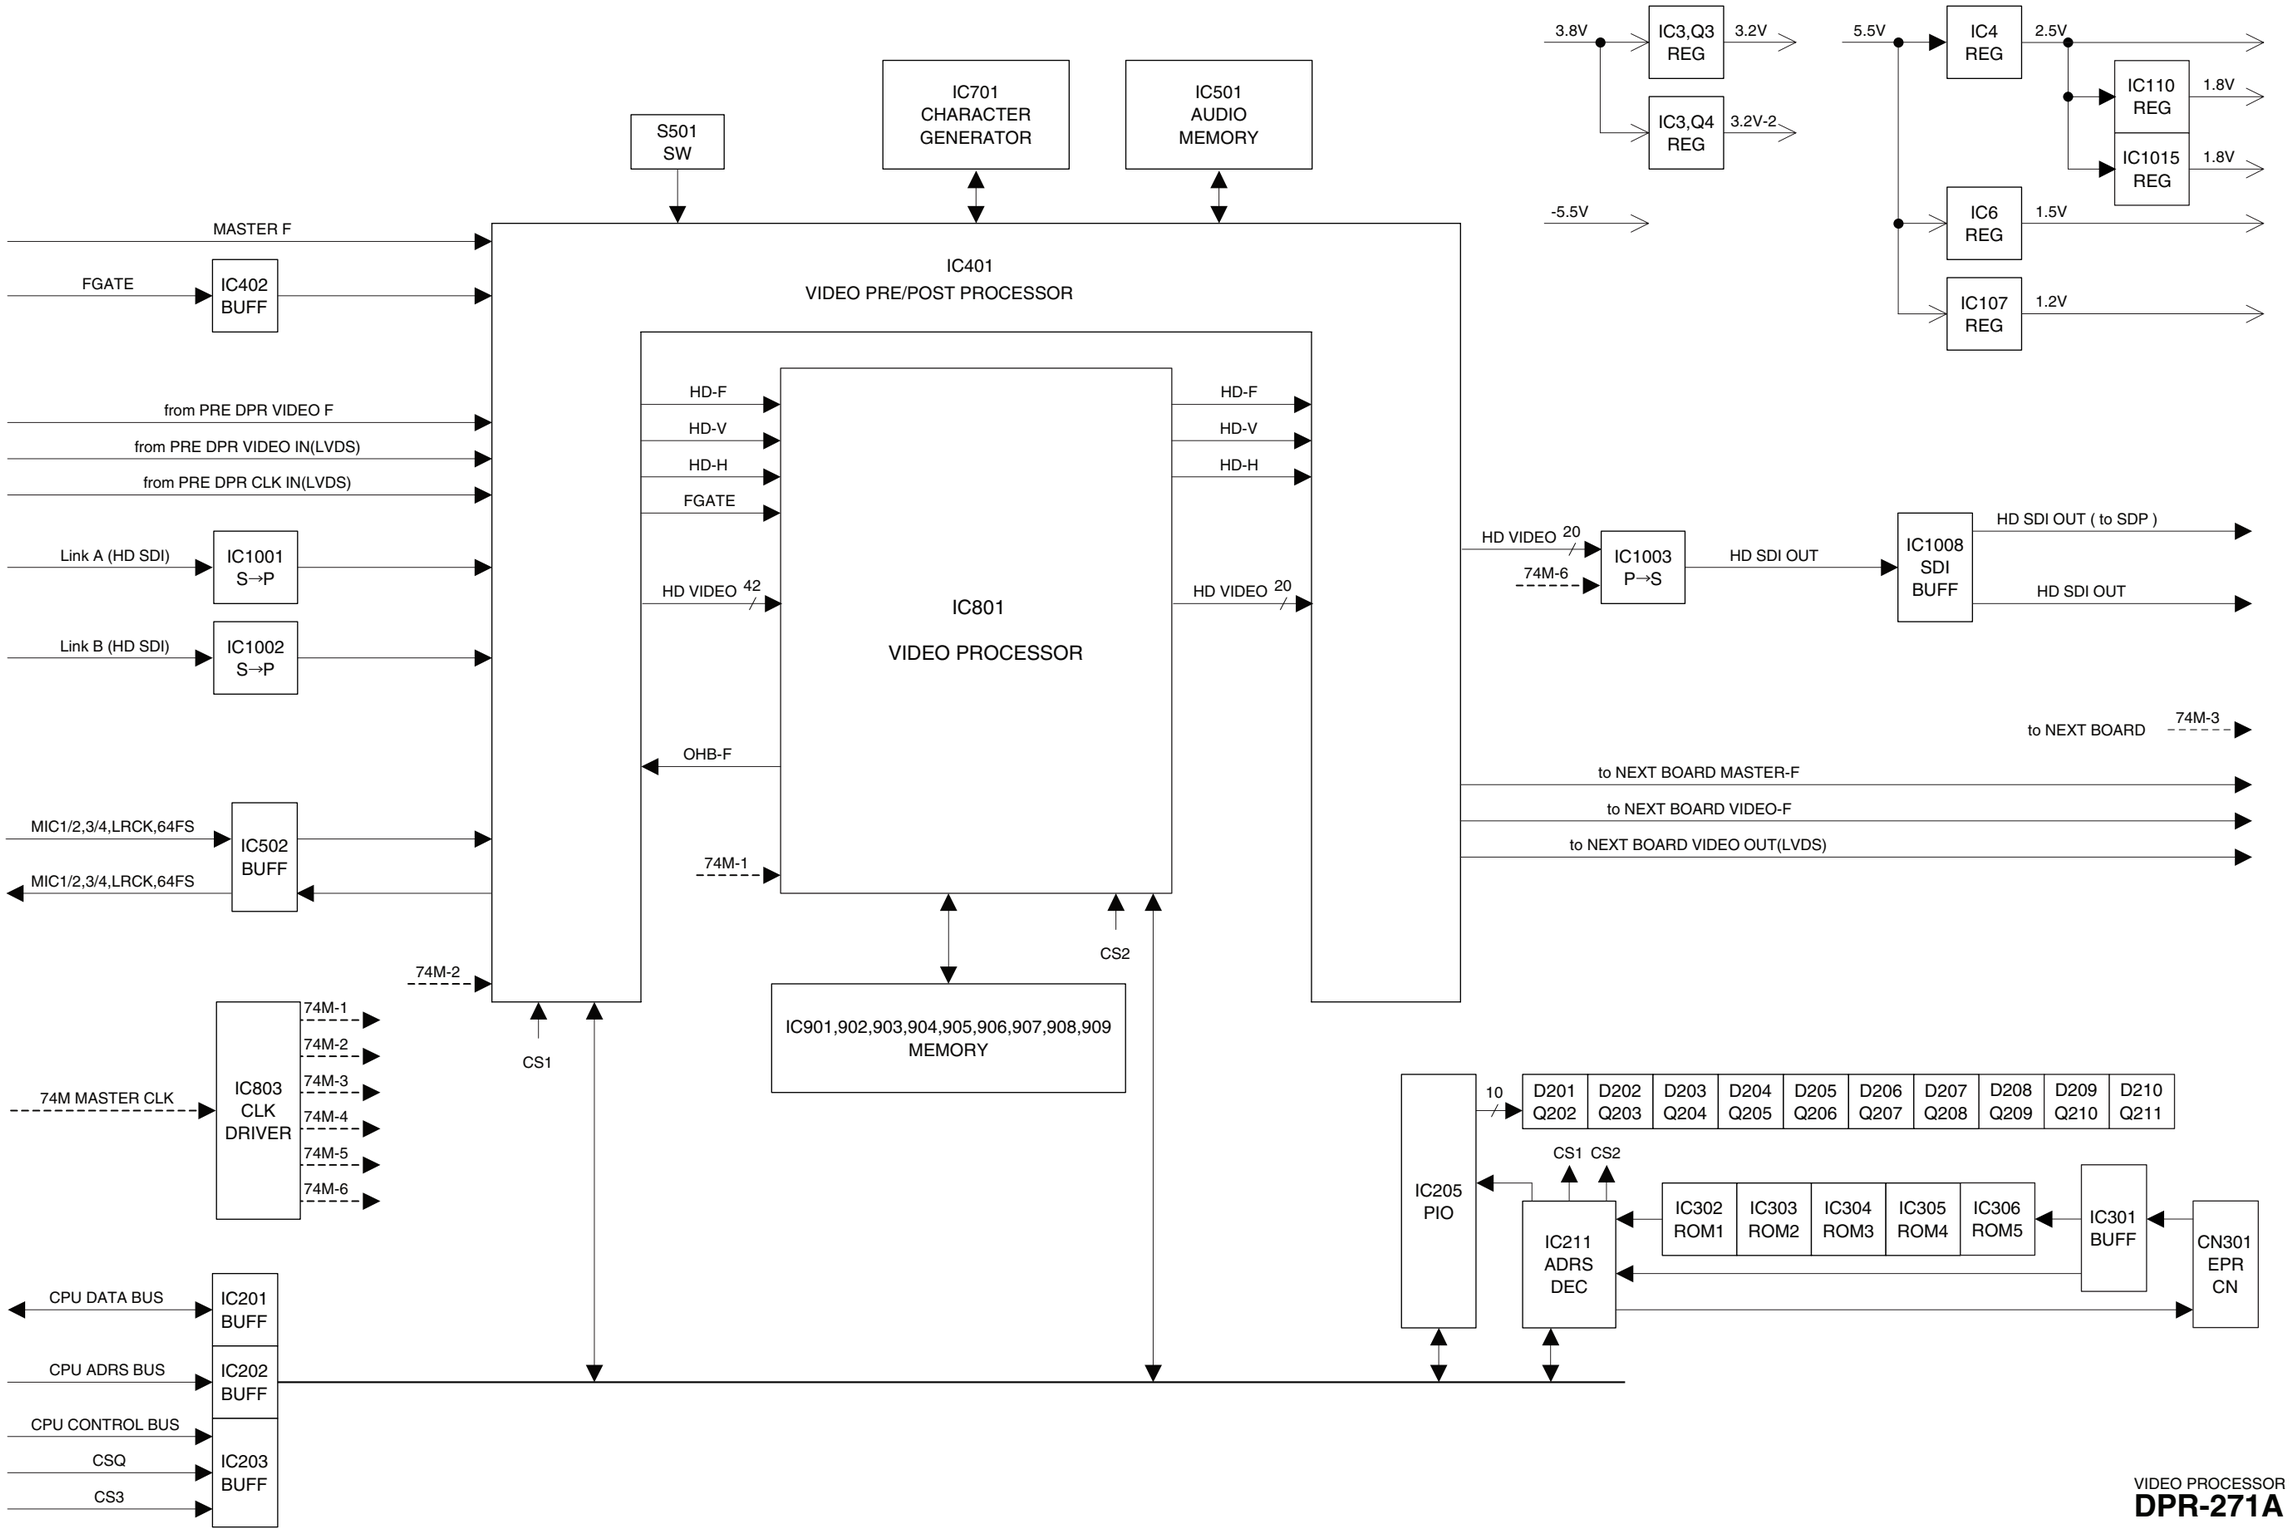


VIDEO PROCESSOR UNIT
**DPR-271A**

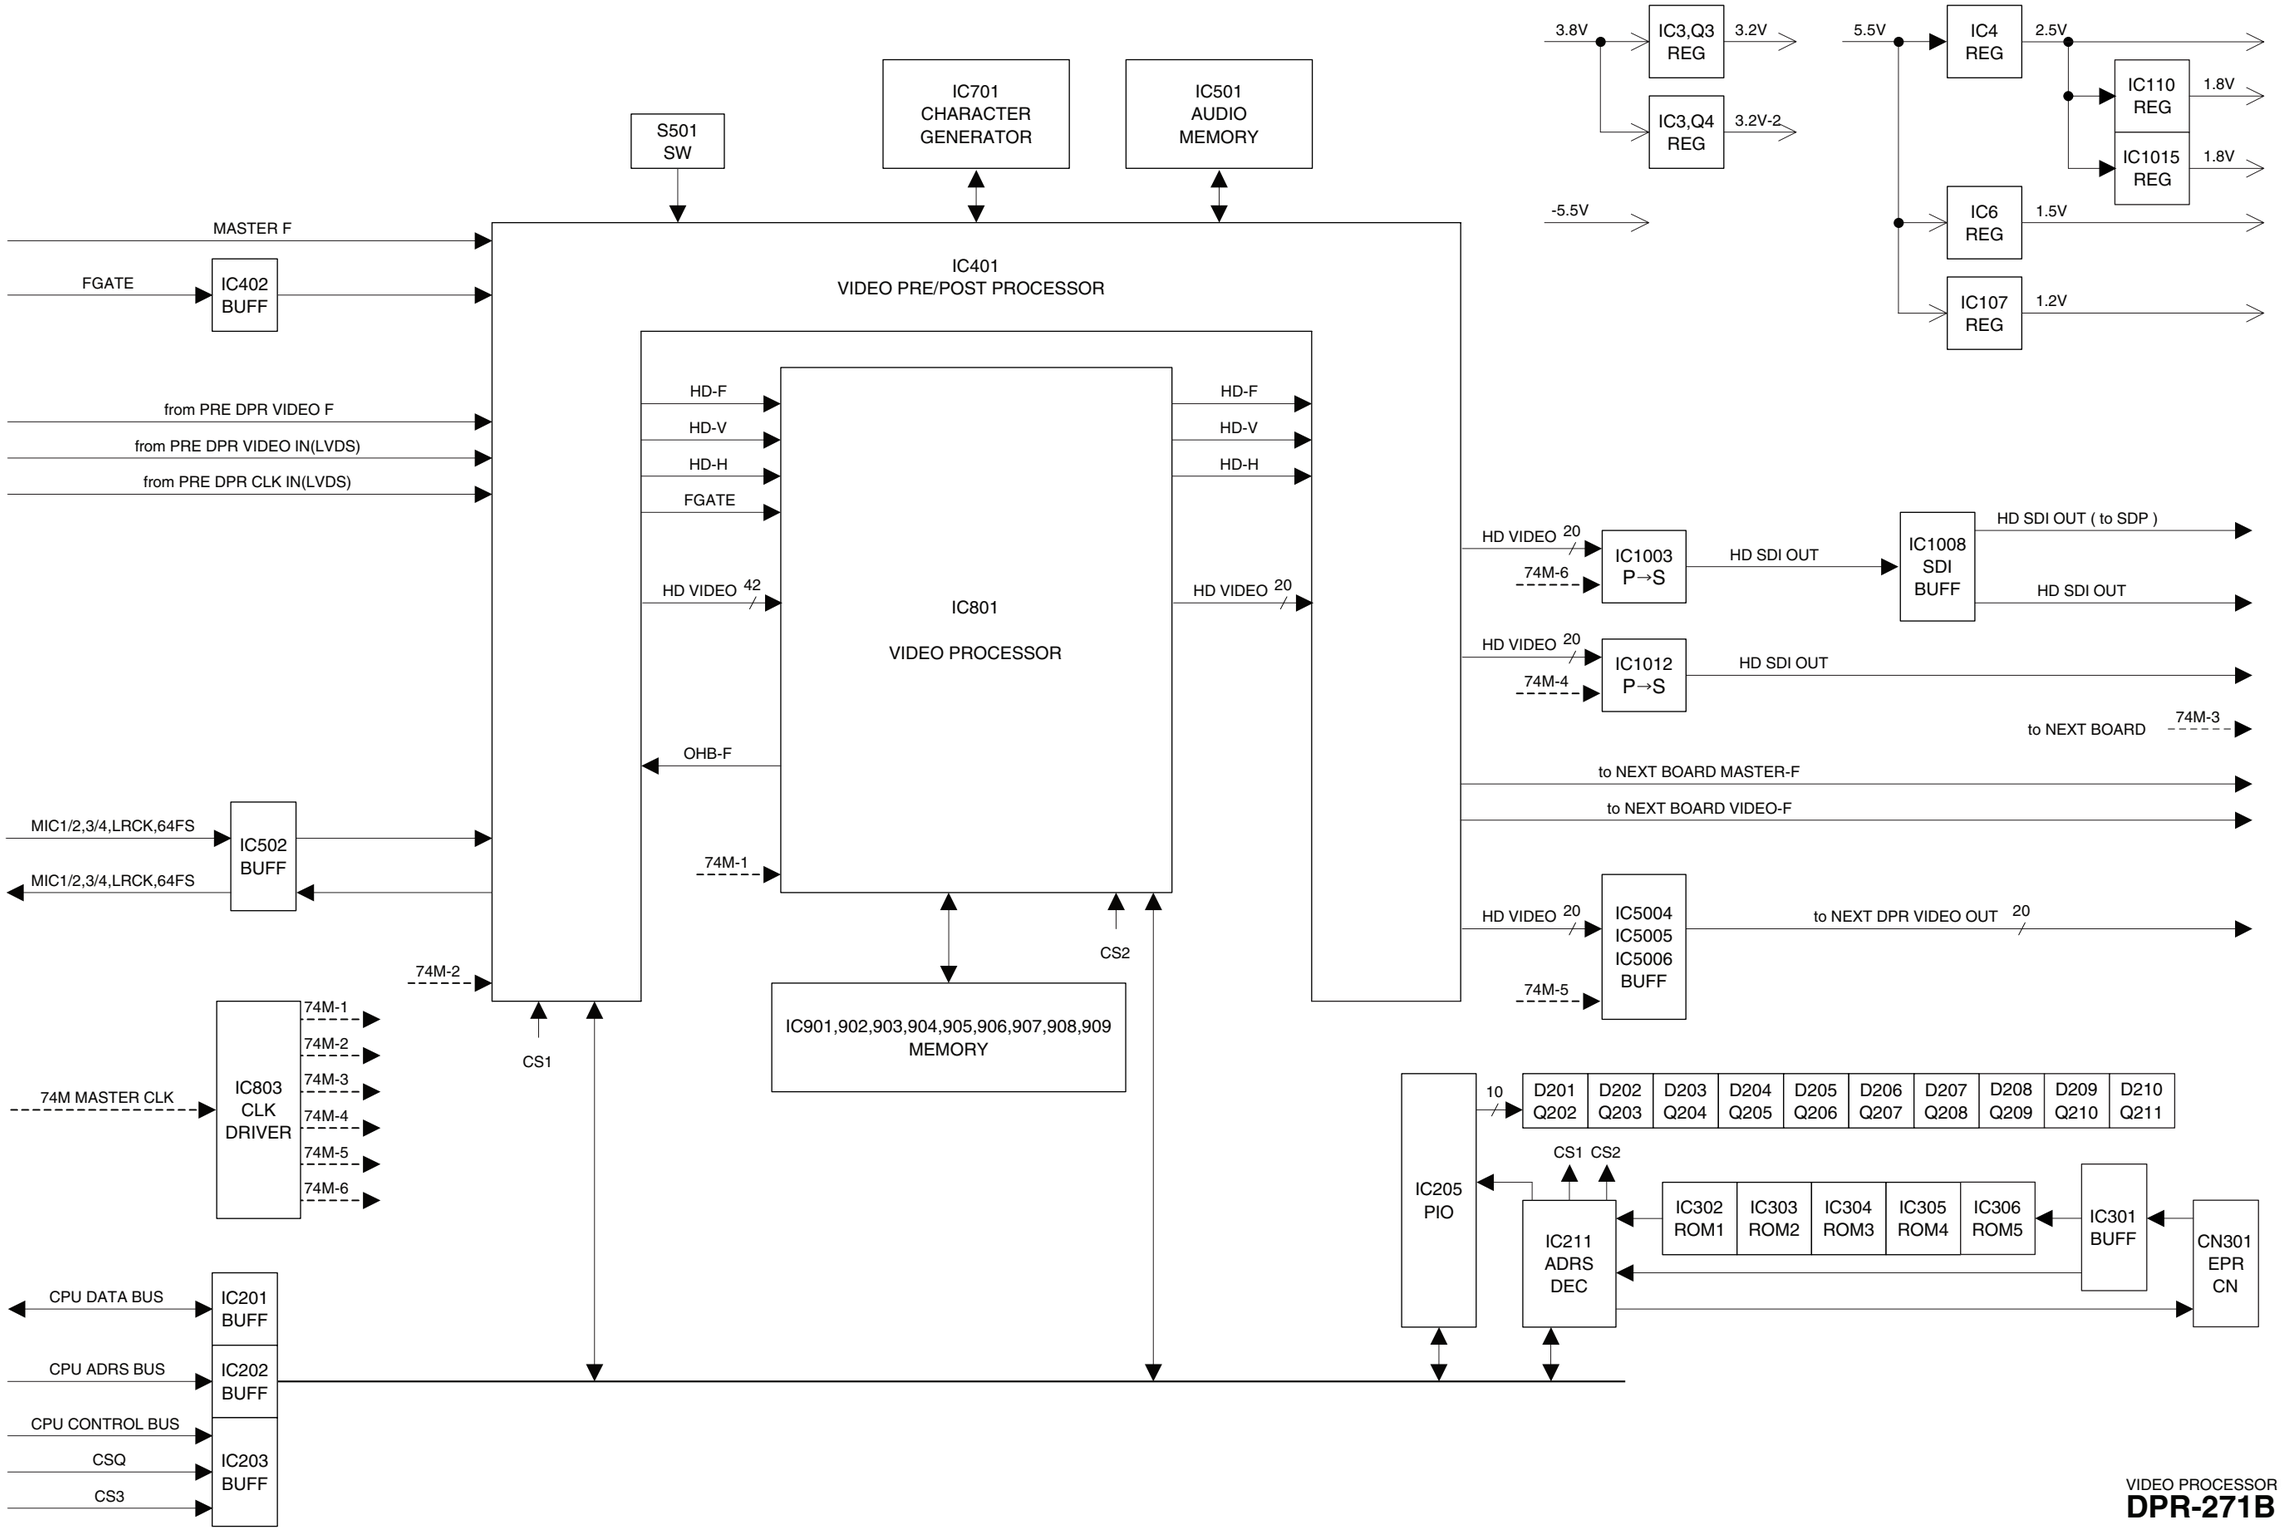


VIDEO PROCESSOR UNIT
**DPR-271B**

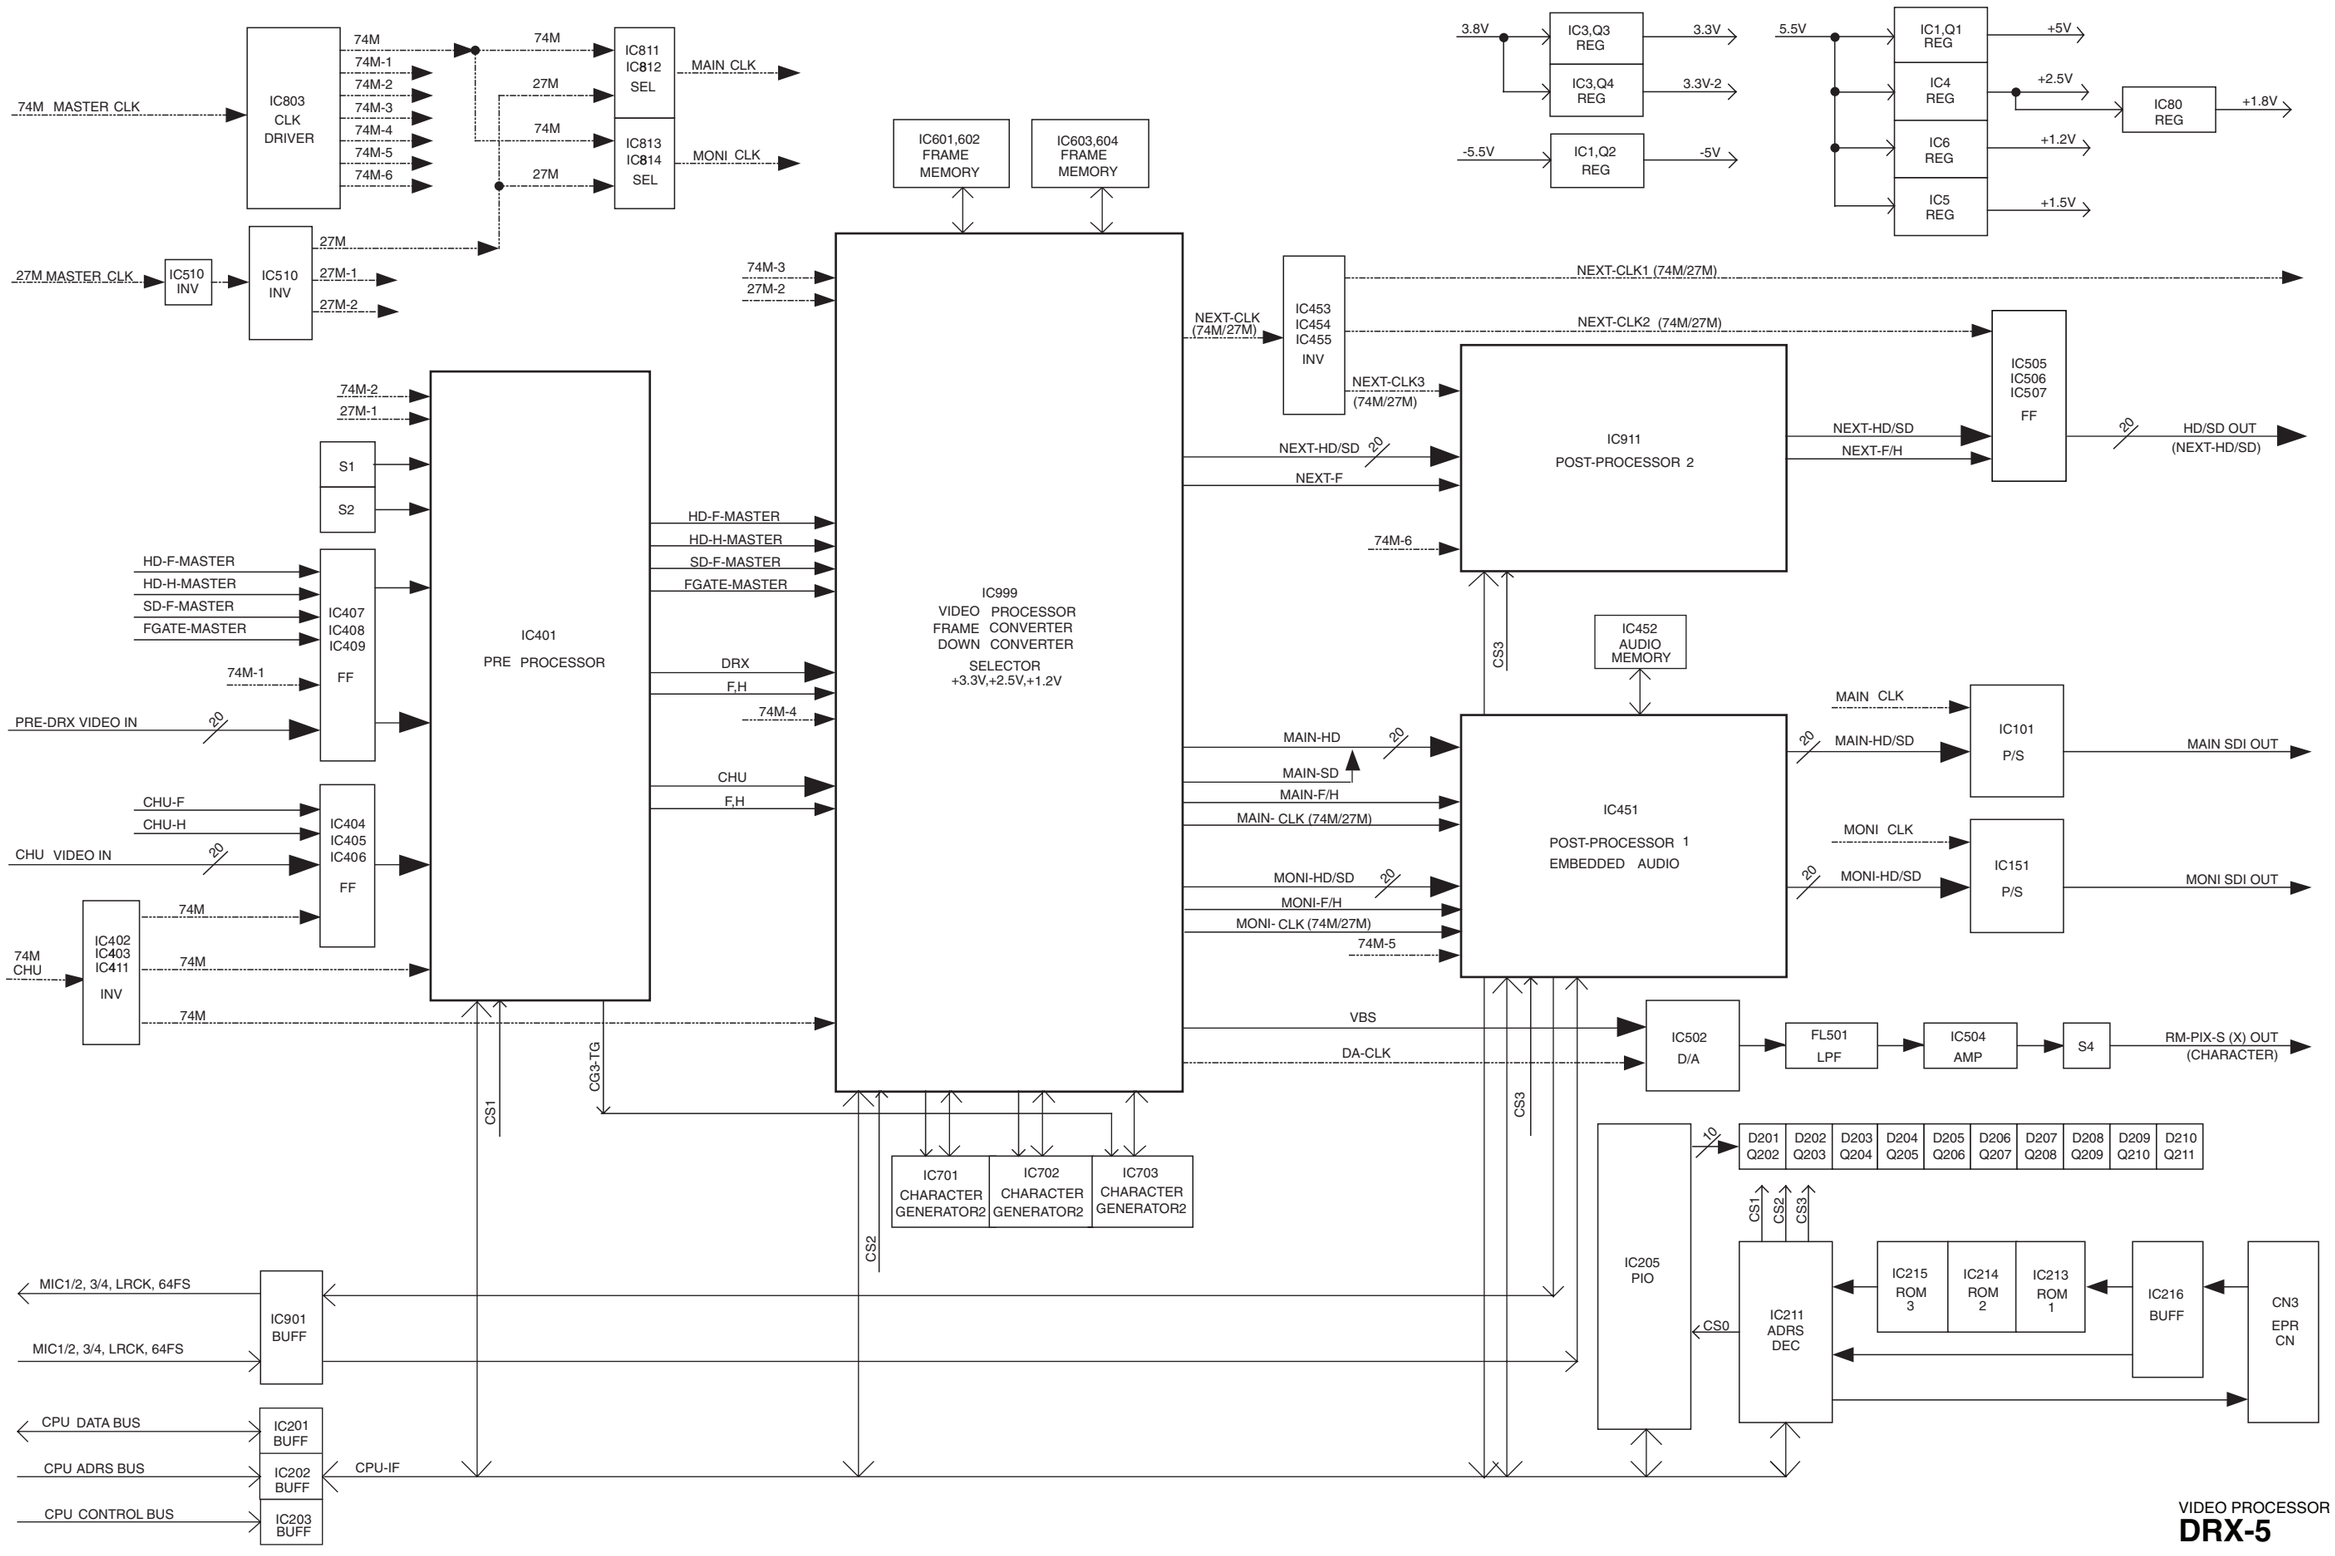


VIDEO PROCESSOR
**DRX-5**

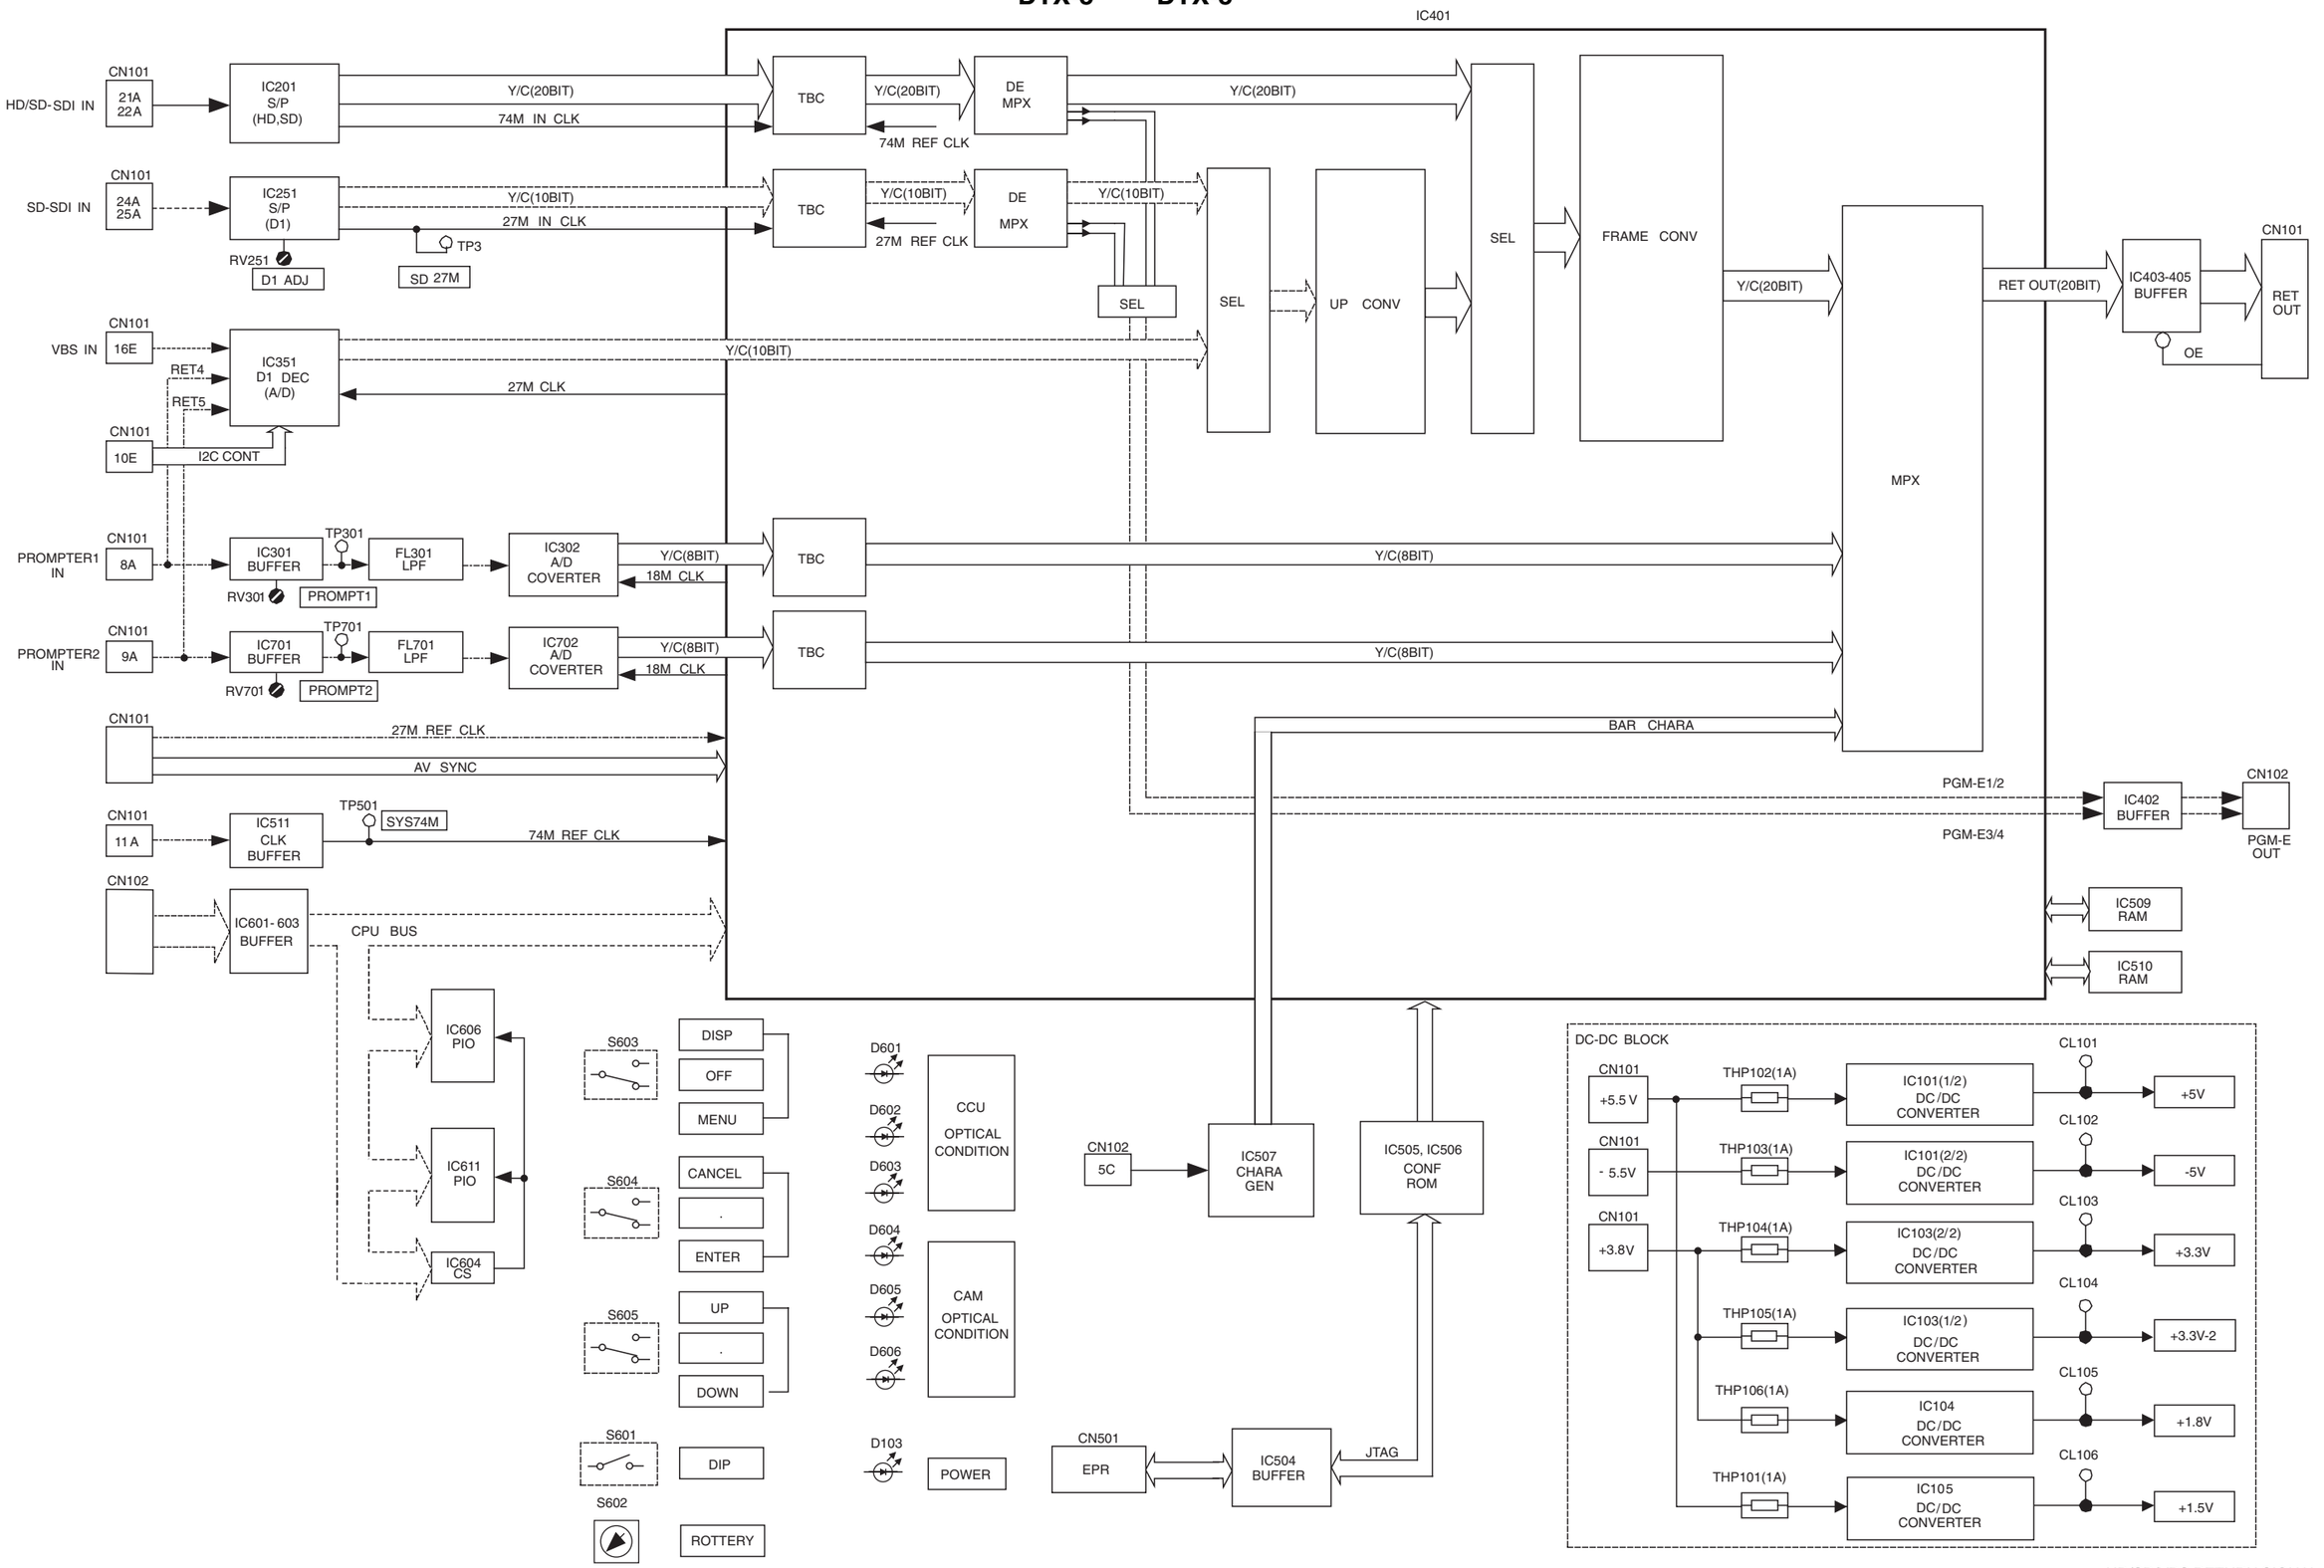




HD/SD/VBS RETURN SIGNAL CONVERTER

**DTX-5**

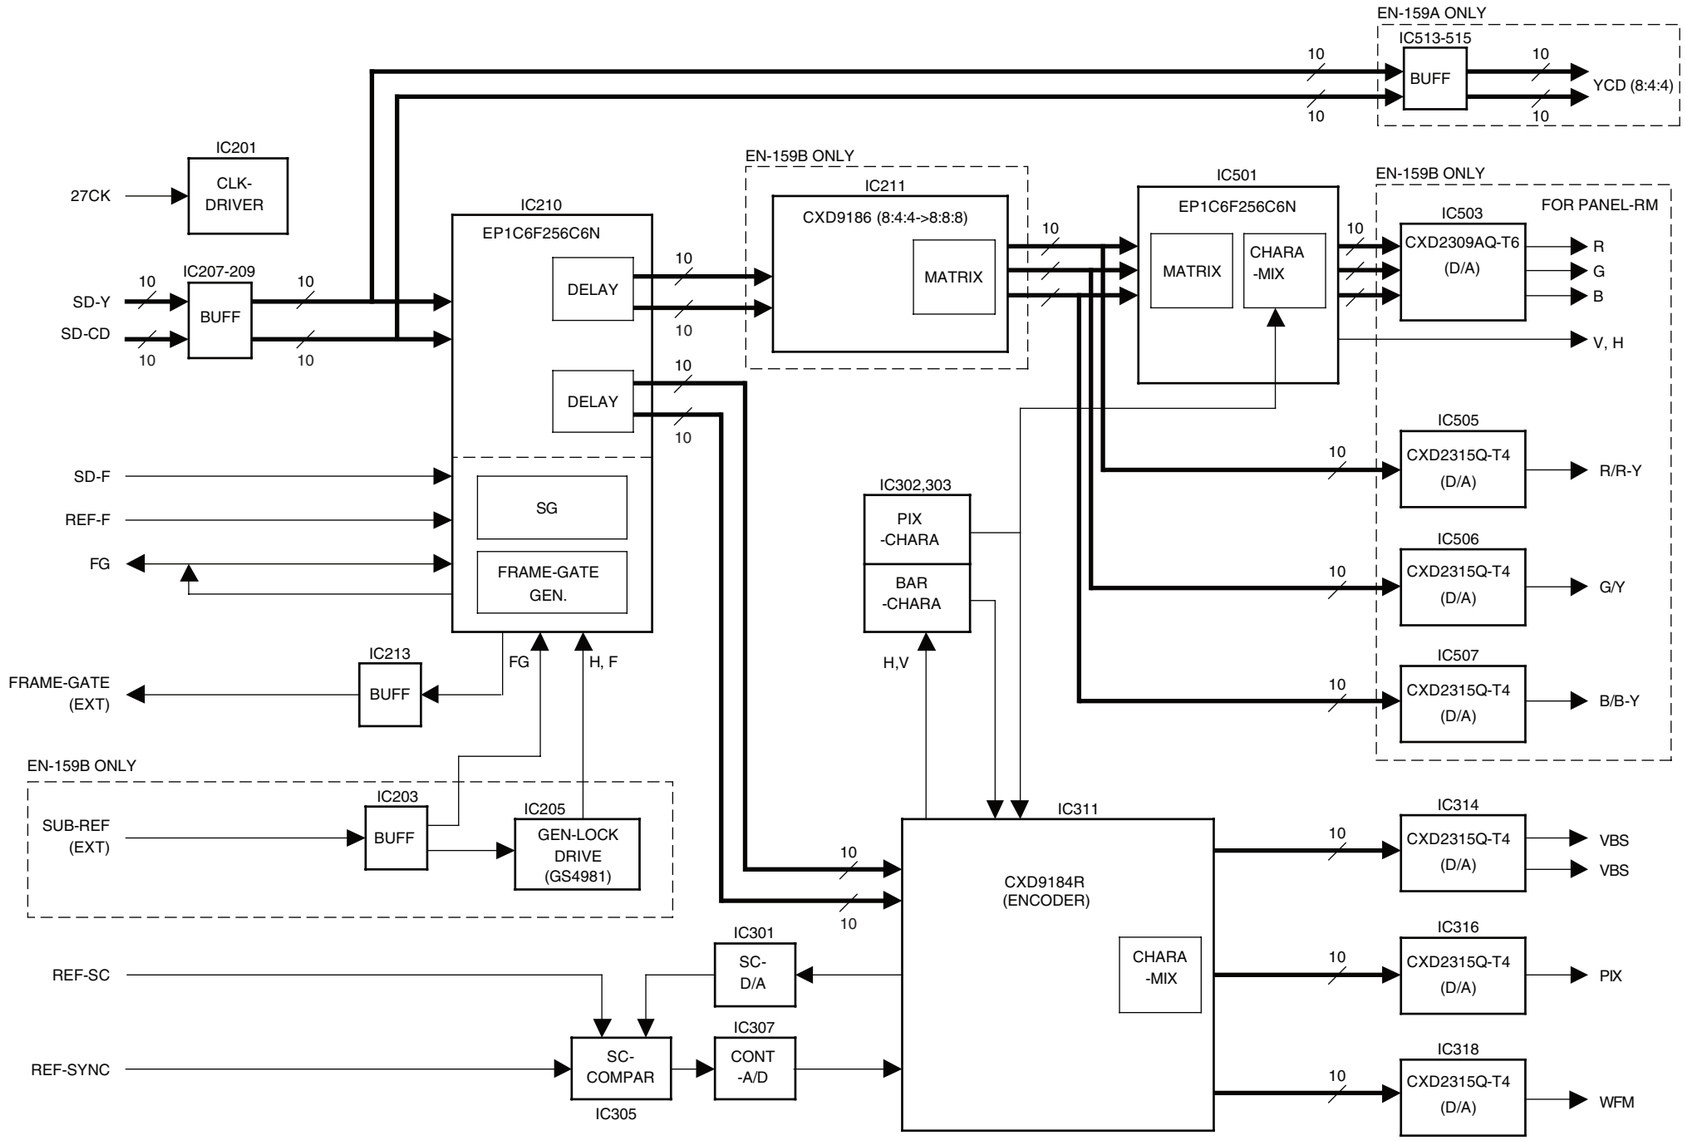


SD ENCODER UNIT
**EN-159A**

SD ENCODER & COMPONENT
VIDEO UNIT
**EN-159B**

HIF-25, HIF-26, HIF-27, SDI-85

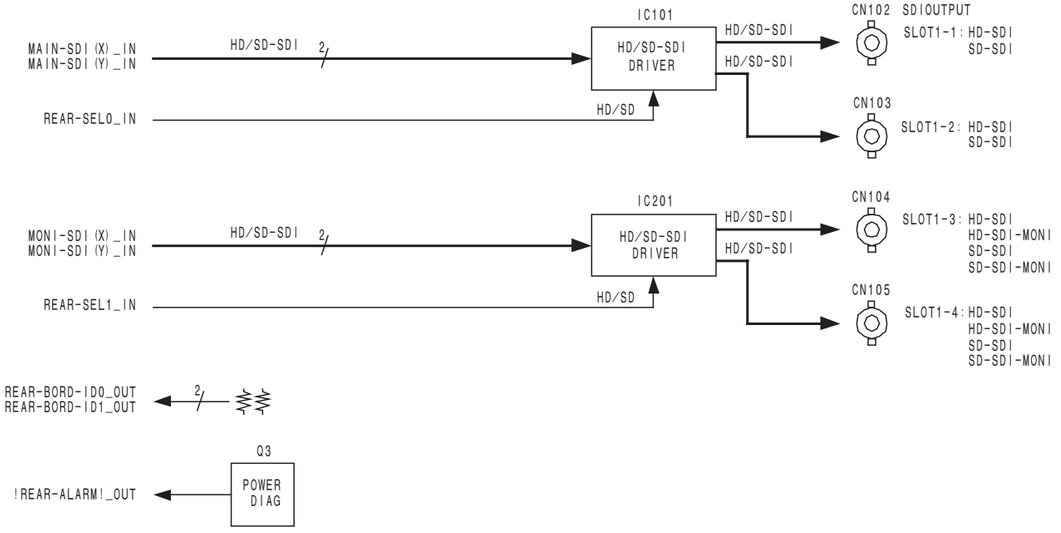


SDI OUTPUT
**HIF-25**

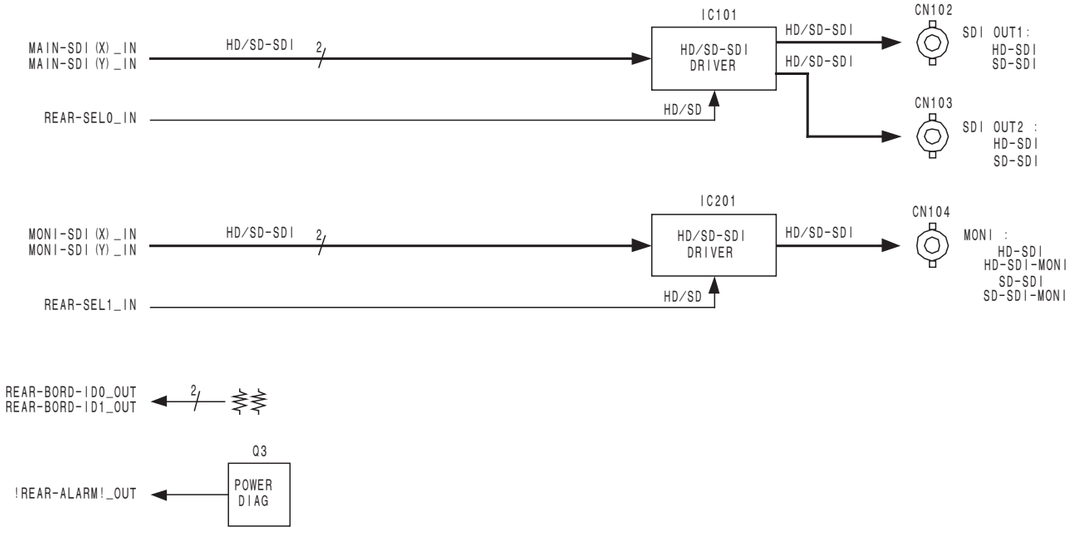


SDI OUTPUT
**HIF-27**

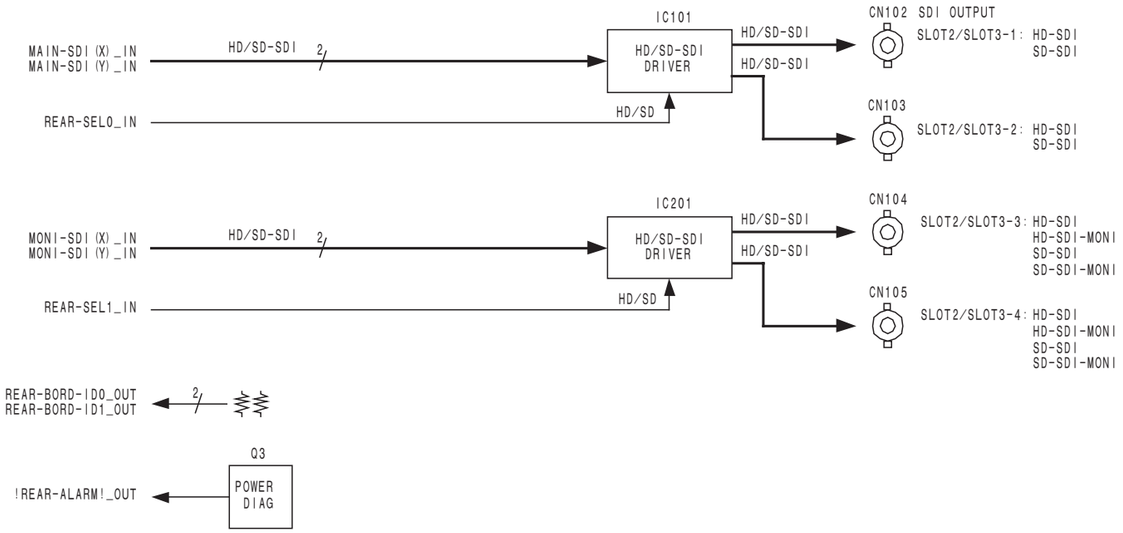


SDI OUTPUT
**HIF-26**

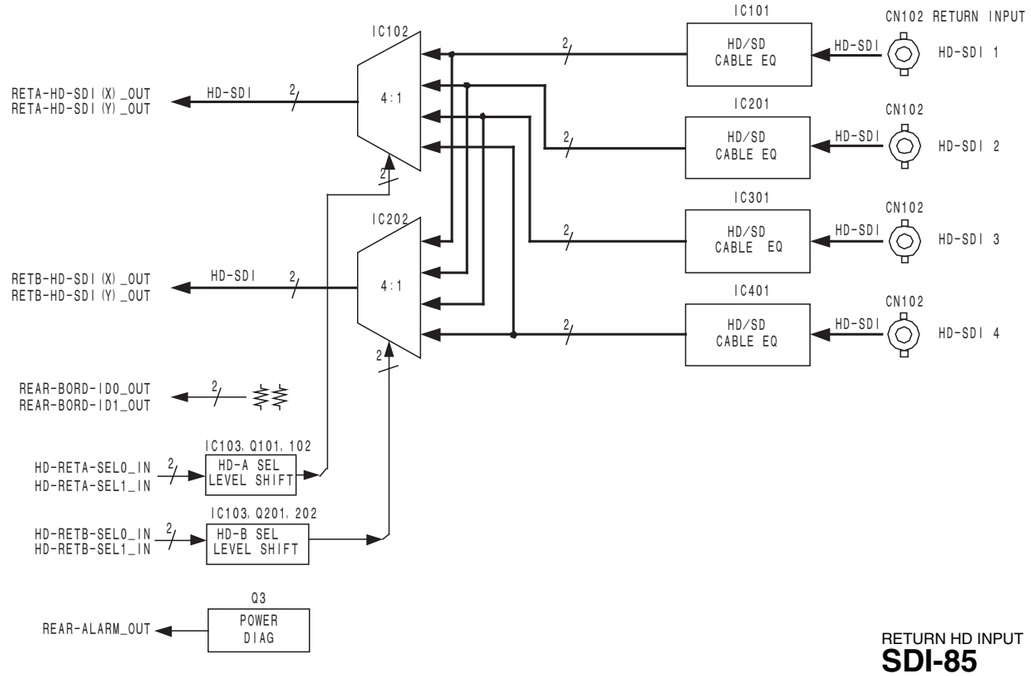


RETURN HD INPUT
**SDI-85**



6-14

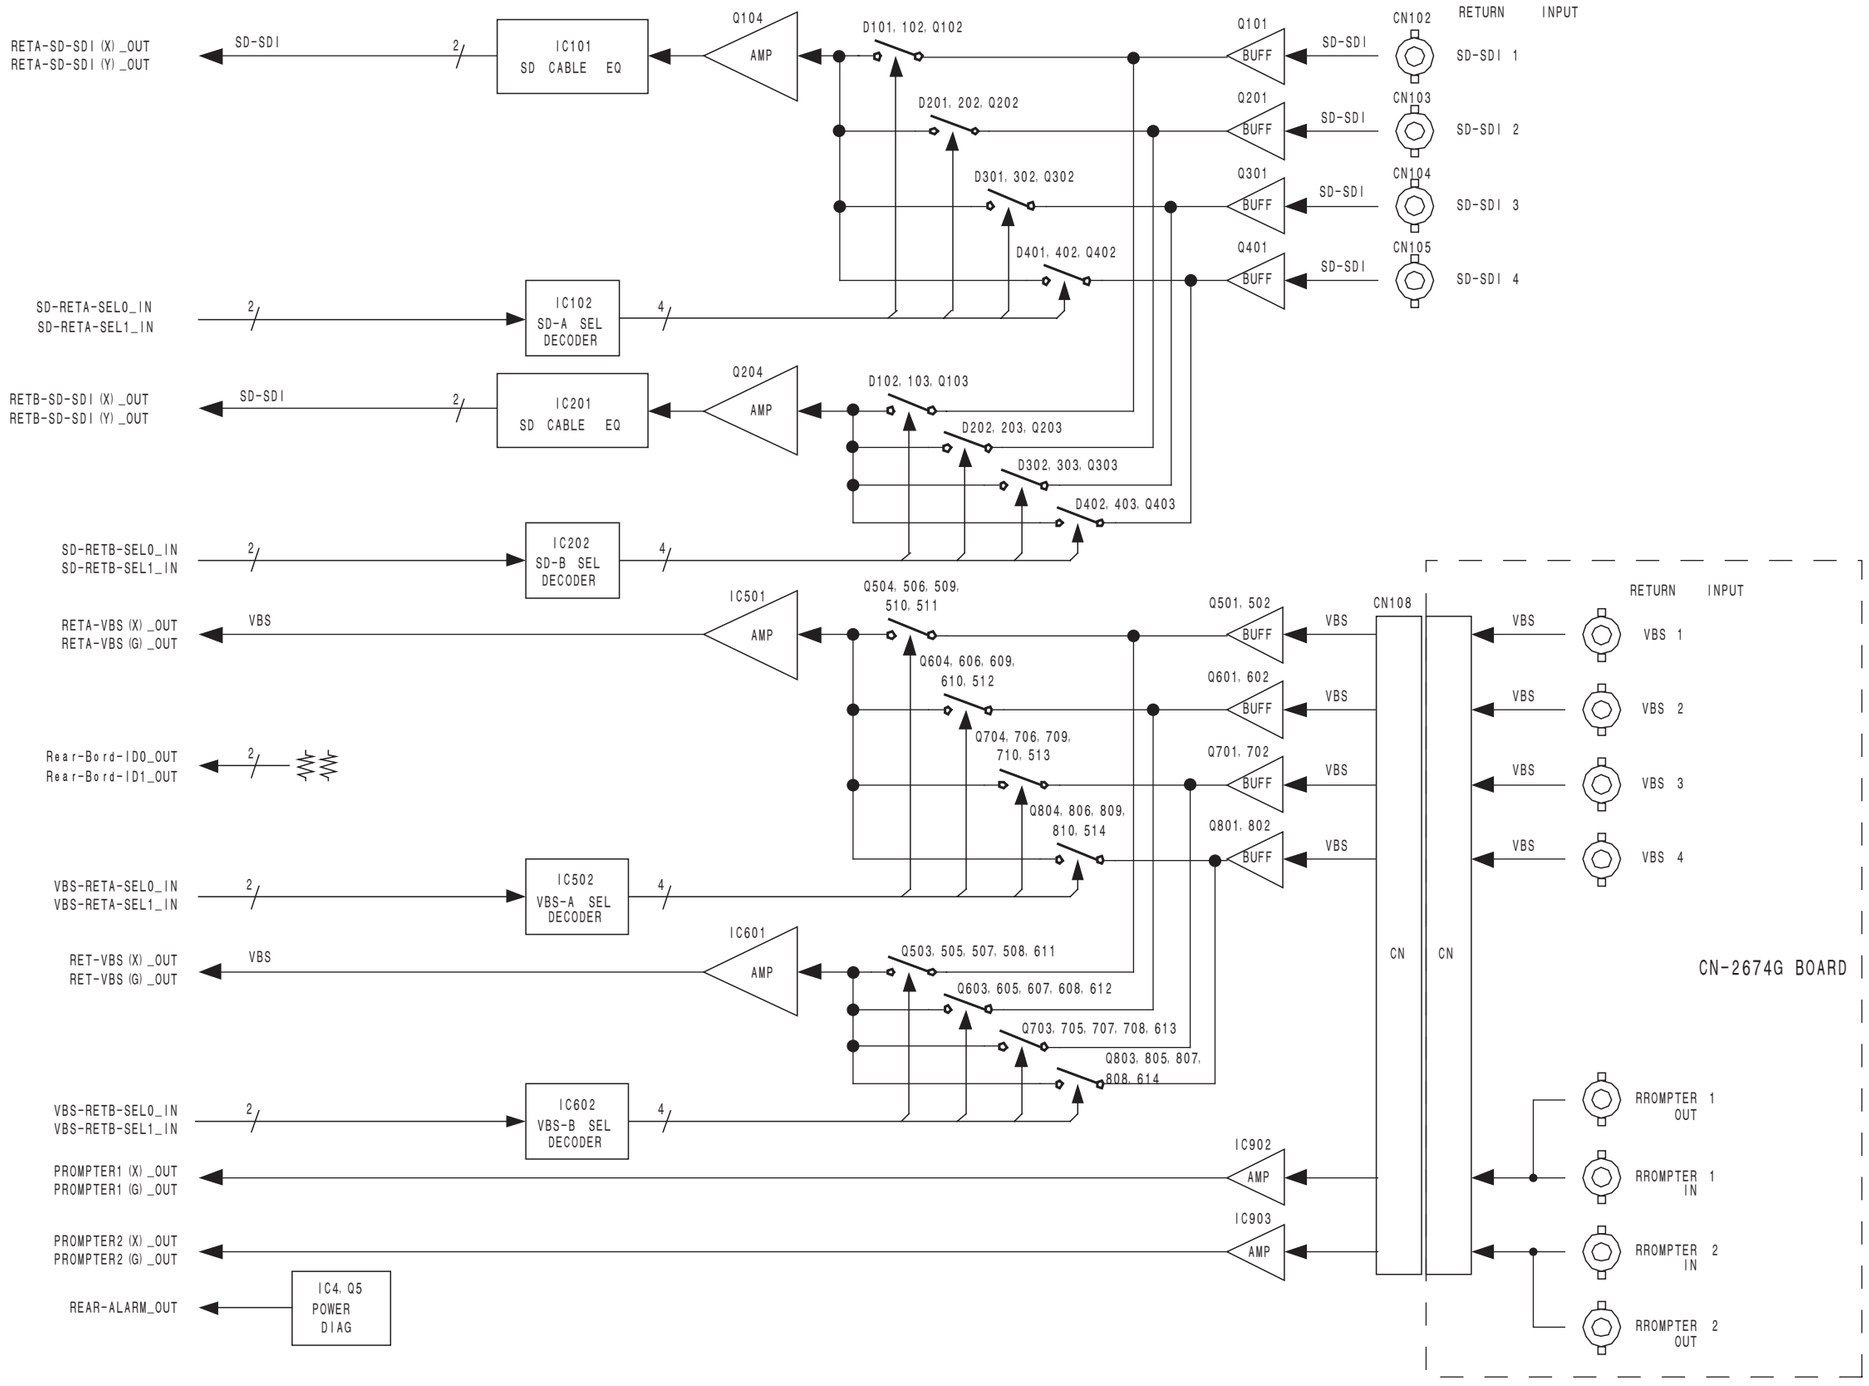


CONNECTOR (VBS PROMPTER)
**CN-2674G**

RETURN SD INPUT
**SDI-86G**

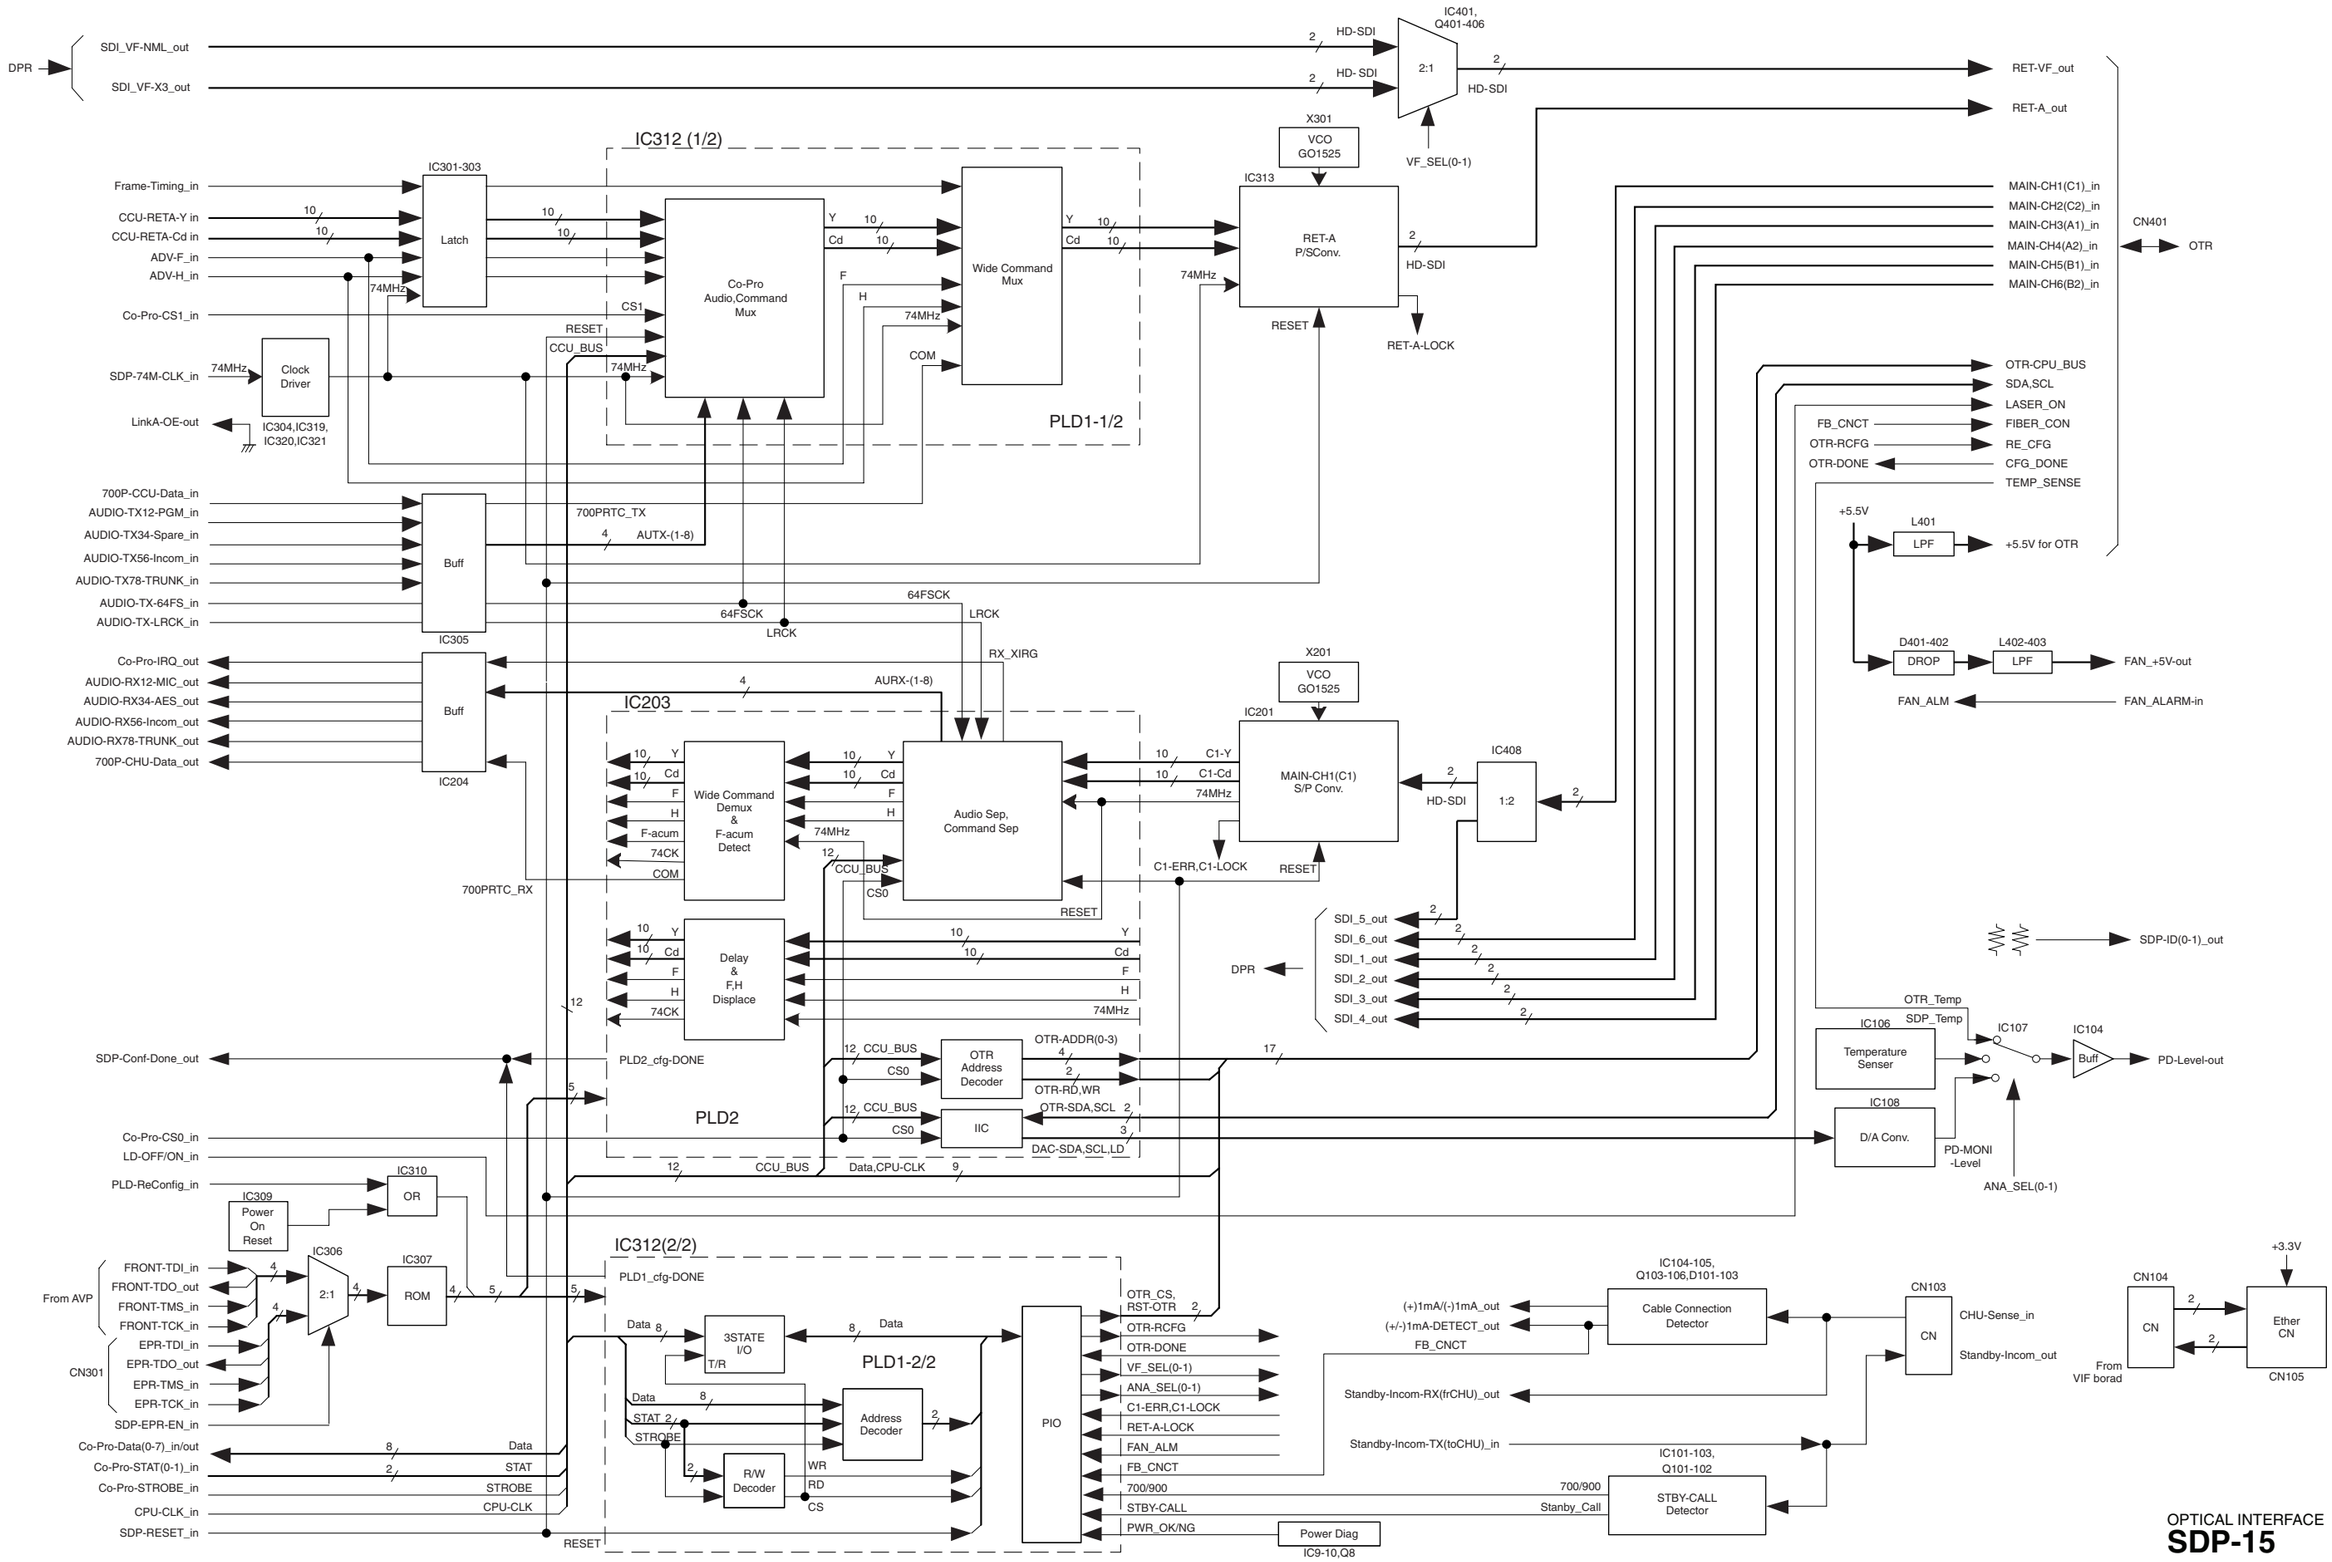


OPTICAL INTERFACE
**SDP-15**

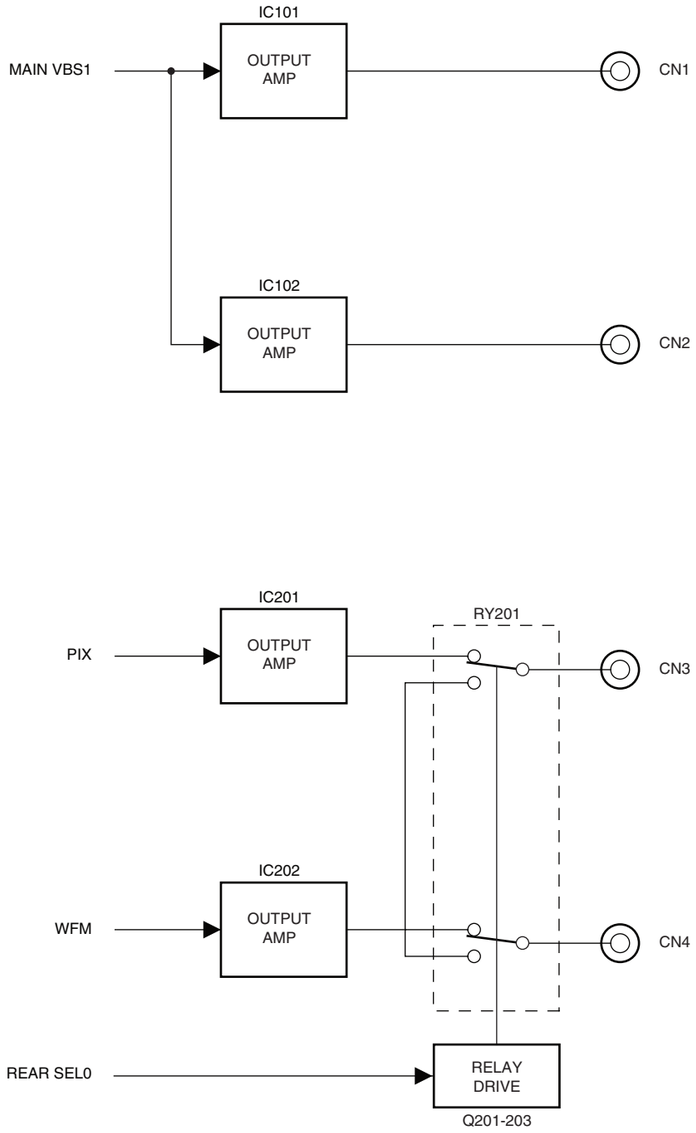


**VDA-64A**

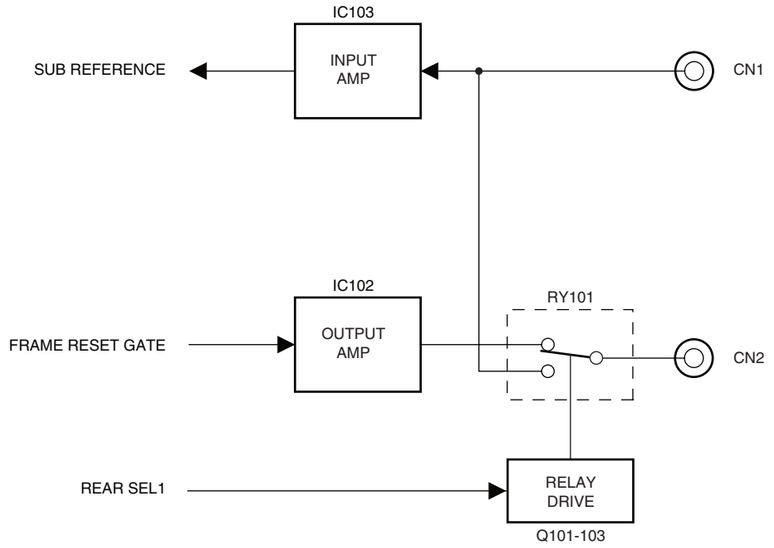


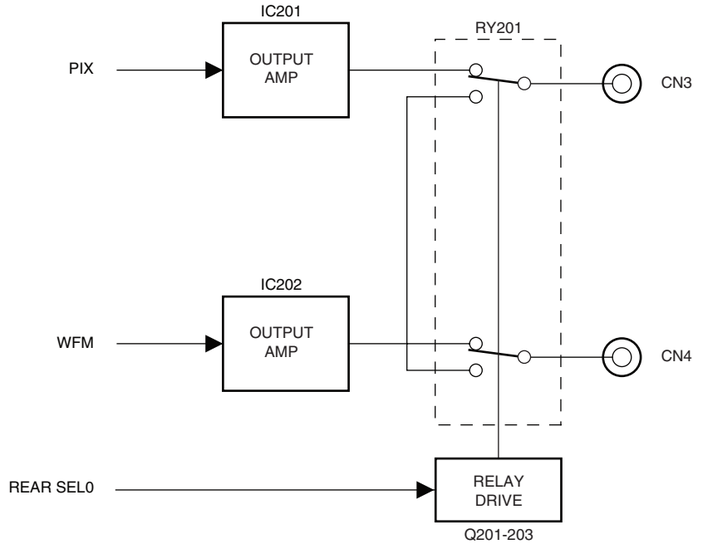


**VDA-64B**

SD ANALOG VIDEO OUTPUT
**VDA-64A**

FRAME REFERENCE INPUT &
SD ANALOG VIDEO OUTPUT
**VDA-64B**

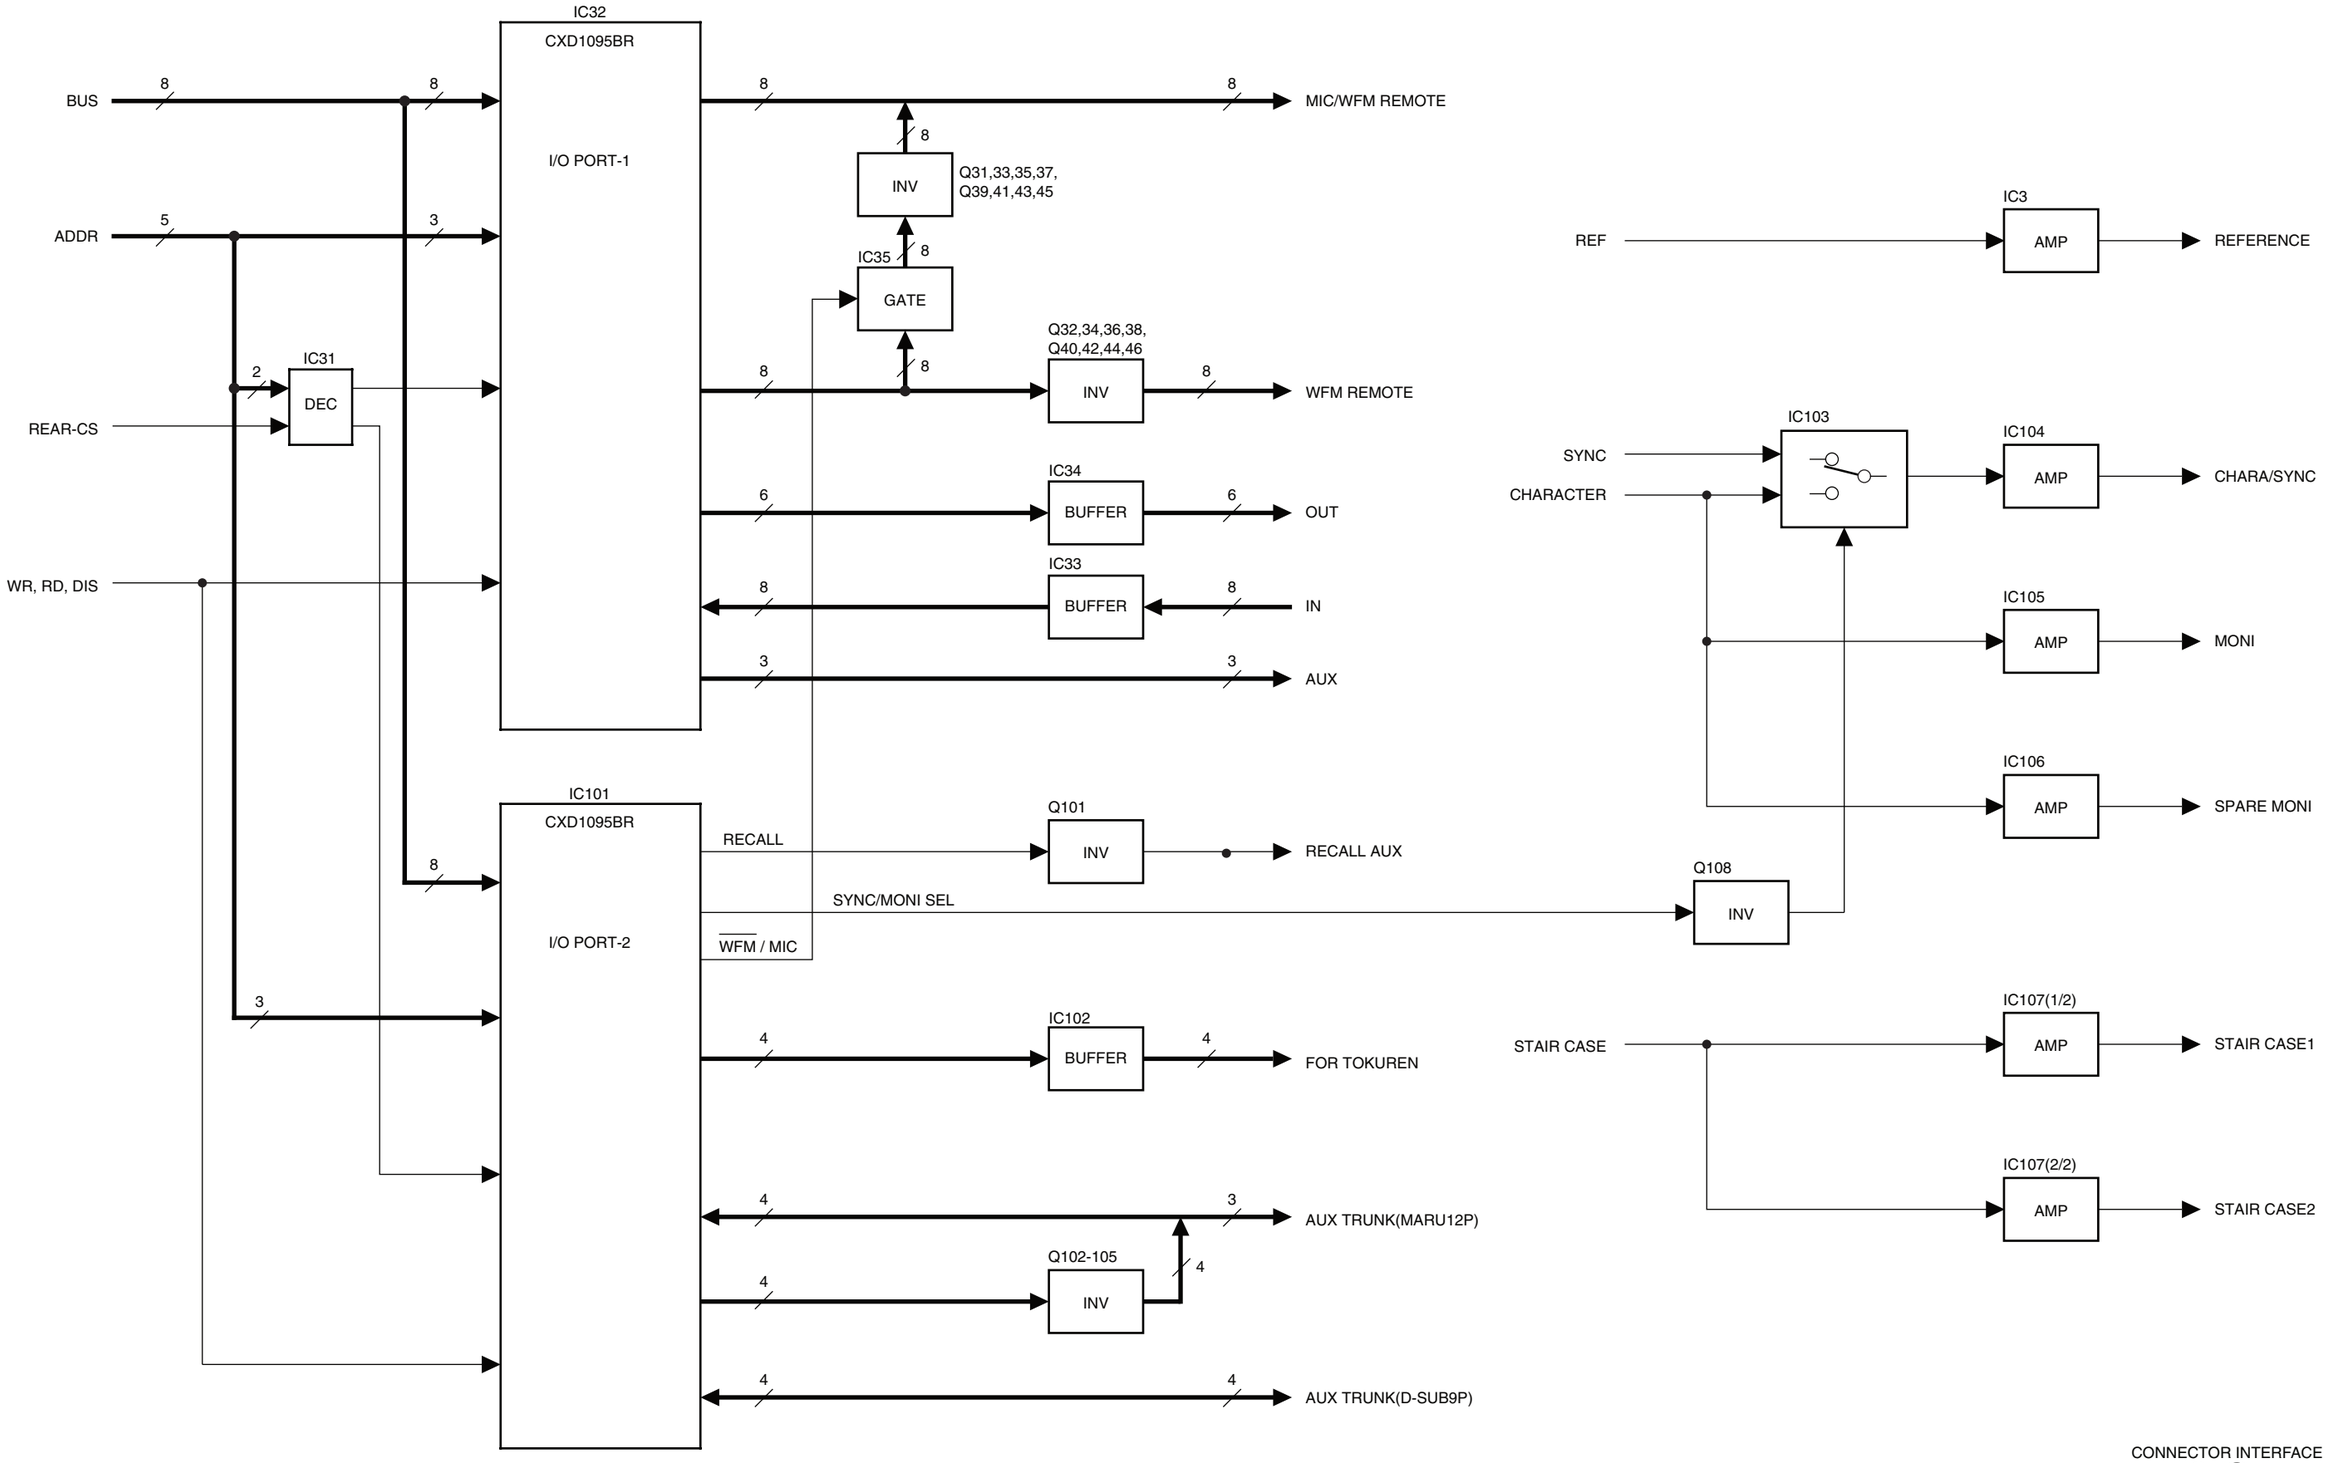


CONNECTOR INTERFACE
**VIF-34G**

# Section 7
# Schematic Diagrams

## Index


| Board Name | Page |
|---|---|
| ADO-10G | 7-2 |
| AT-167S | 7-3 |
| AU-302 | 7-13 |
| AVP-6 | 7-14 |
| CN-2672G | 7-23 |
| CN-2673 | 7-24 |
| CN-2674G | 7-24 |
| CN-2700 | 7-25 |
| CN-2718 | 7-25 |
| CN-2805G | 7-25 |
| CNB-21G | 7-26 |
| CPU-395 | 7-29 |
| DPR-271A | 7-34 |
| DPR-271B | 7-50 |
| DRX-5 | 7-66 |
| DTX-5 | 7-75 |
| EN-159A | 7-83 |
| EN-159B | 7-91 |
| HIF-25 | 7-99 |
| HIF-26 | 7-100 |
| HIF-27 | 7-101 |
| MB-1073 | 7-103 |
| OTR-1 | 7-106 |
| SDI-85 | 7-118 |
| SDI-86G | 7-119 |
| SDP-15 | 7-121 |
| VDA-64A | 7-128 |
| VDA-64B | 7-129 |
| VIF-34G | 7-131 |
| Frame Wiring | 7-135 |


## Board List

| Board Name | HDCU3300 | HKCU1001 | HKCU1003 | HKCU1005 |
|---|---|---|---|---|
| ADO-10G | ○ | – | – | – |
| AT-167S | ○ | – | – | – |
| AU-302 | ○ | – | – | – |
| AVP-6 | ○ | – | – | – |
| CN-2672G | ○ | – | – | – |
| CN-2673 | ○ | – | – | – |
| CN-2674G | ○ | – | – | – |
| CN-2700 | ○ | – | – | – |
| CN-2718 | ○ | – | – | – |
| CN-2805G | ○ | – | – | – |
| CNB-21G | ○ | – | – | – |
| CPU-395 | ○ | – | – | – |
| DPR-271A | ○ | – | – | – |
| DPR-271B | ○ | – | – | – |
| DRX-5 | ○ | – | – | ○ |
| DTX-5 | ○ | – | – | – |
| EN-159A | – | ○ | – | – |
| EN-159B | – | – | ○ | – |
| HIF-25 | ○ | – | – | – |
| HIF-26 | ○ | – | – | ○ |
| HIF-27 | ○ | – | – | – |
| MB-1073 | ○ | – | – | – |
| OTR-1 | ○ | – | – | – |
| SDI-85 | ○ | – | – | – |
| SDI-86G | ○ | – | – | – |
| SDP-15 | ○ | – | – | – |
| VDA-64A | – | ○ | ○ | – |
| VDA-64B | – | – | ○ | – |
| VIF-34G | ○ | – | – | – |

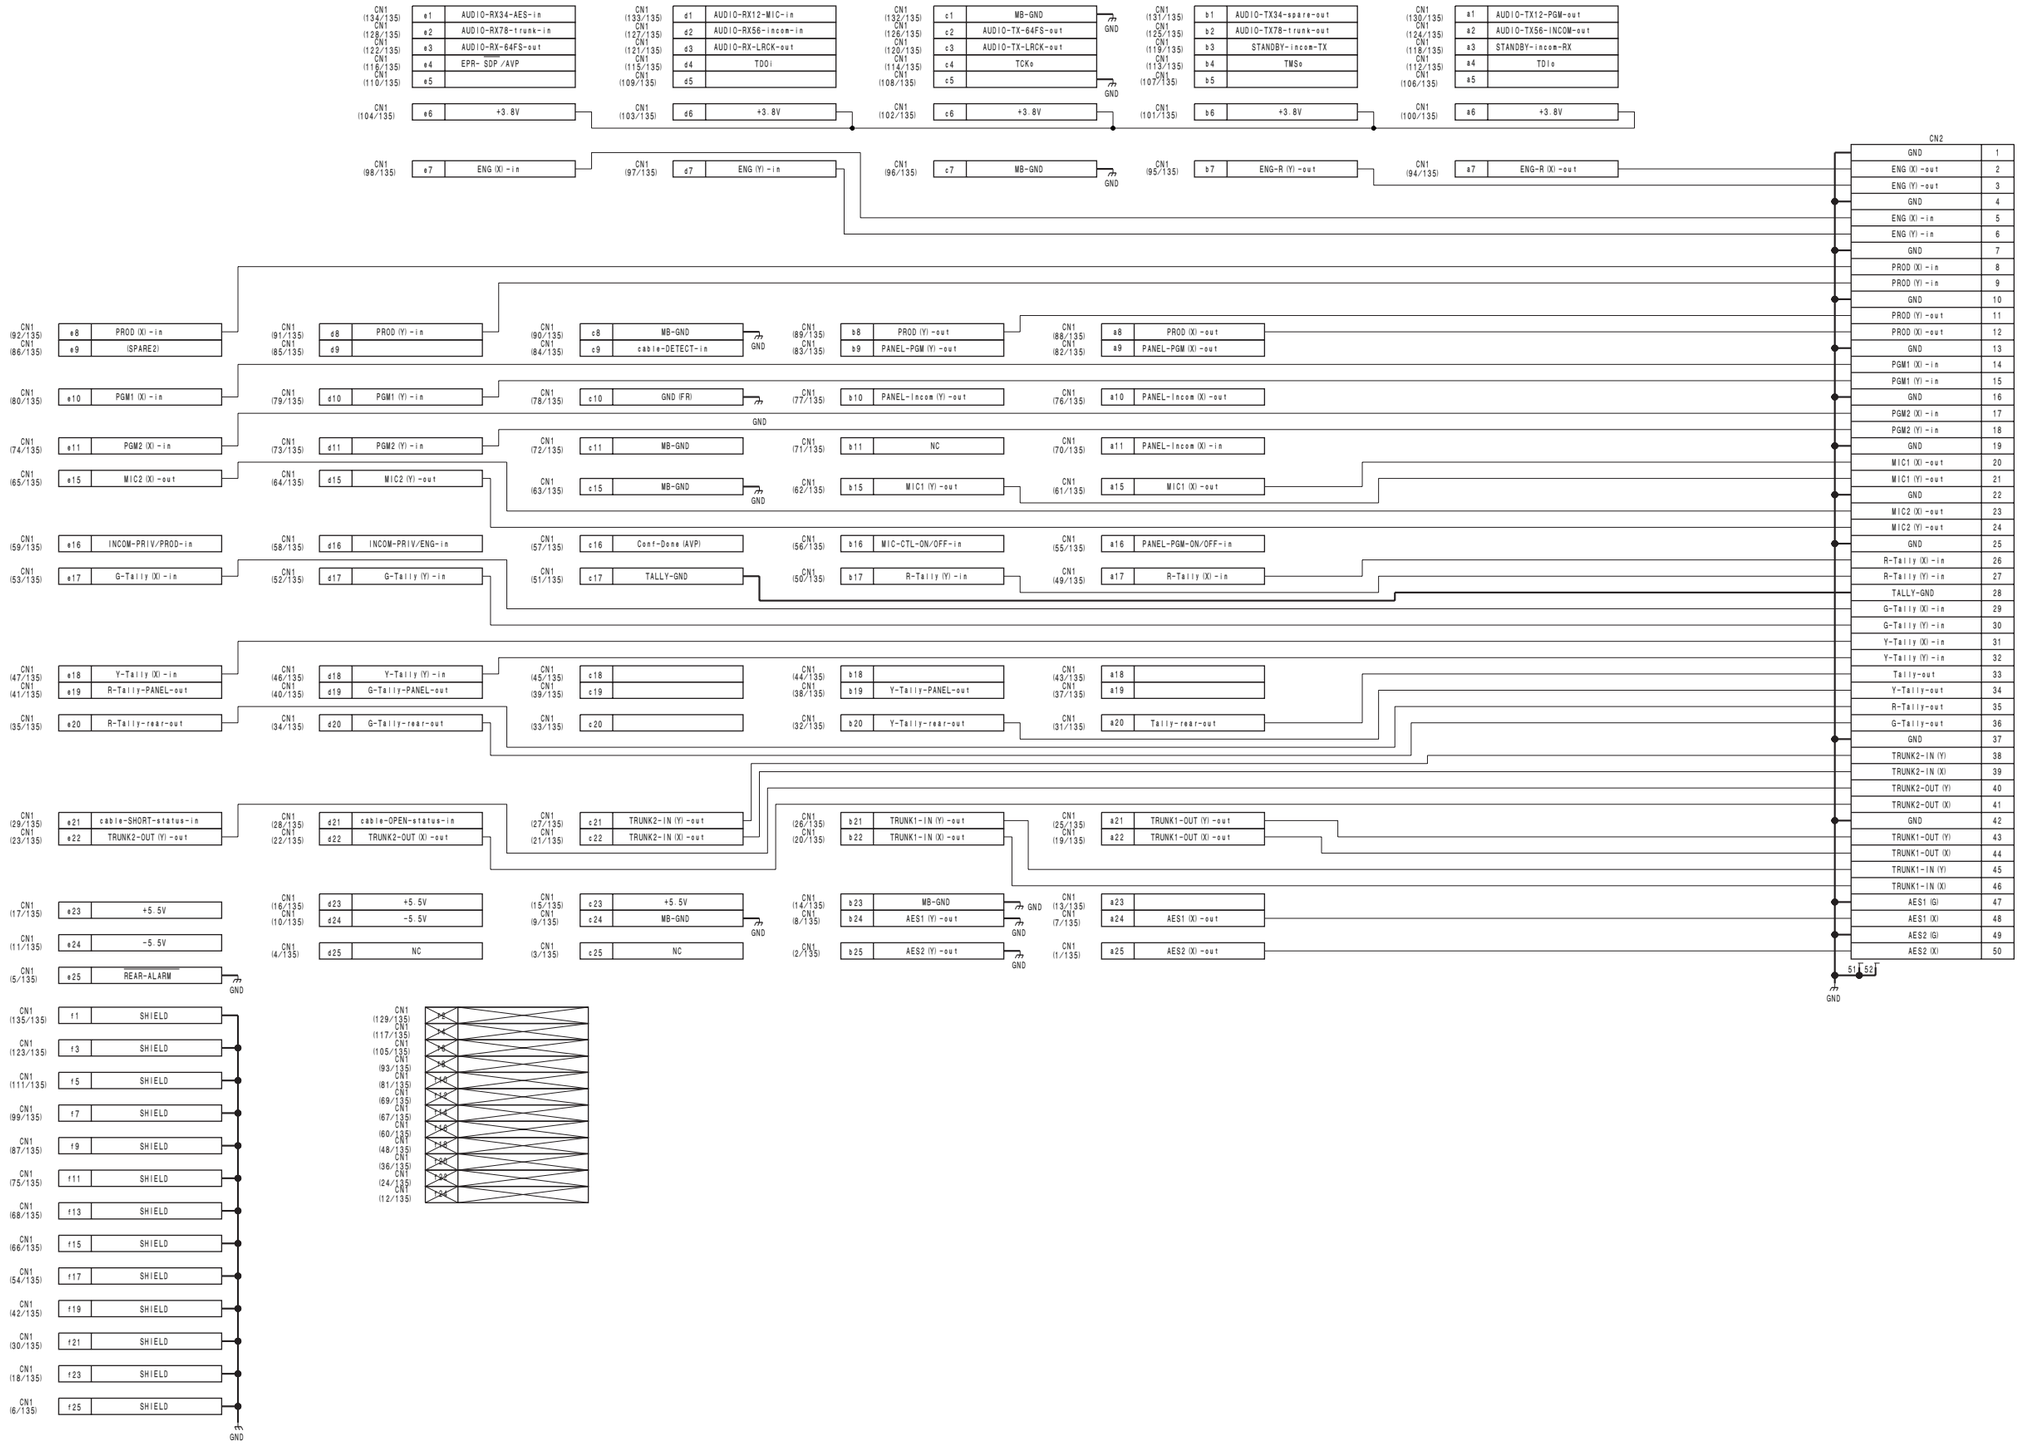


**ADO-10G**
BOARD NO. 1-867-886-11
HDCU1000_ADO-10_011_1

# AT-167S (1/6)

**SUFFIX: -13**

AT-167S (1/6)
SUFFIX: -13

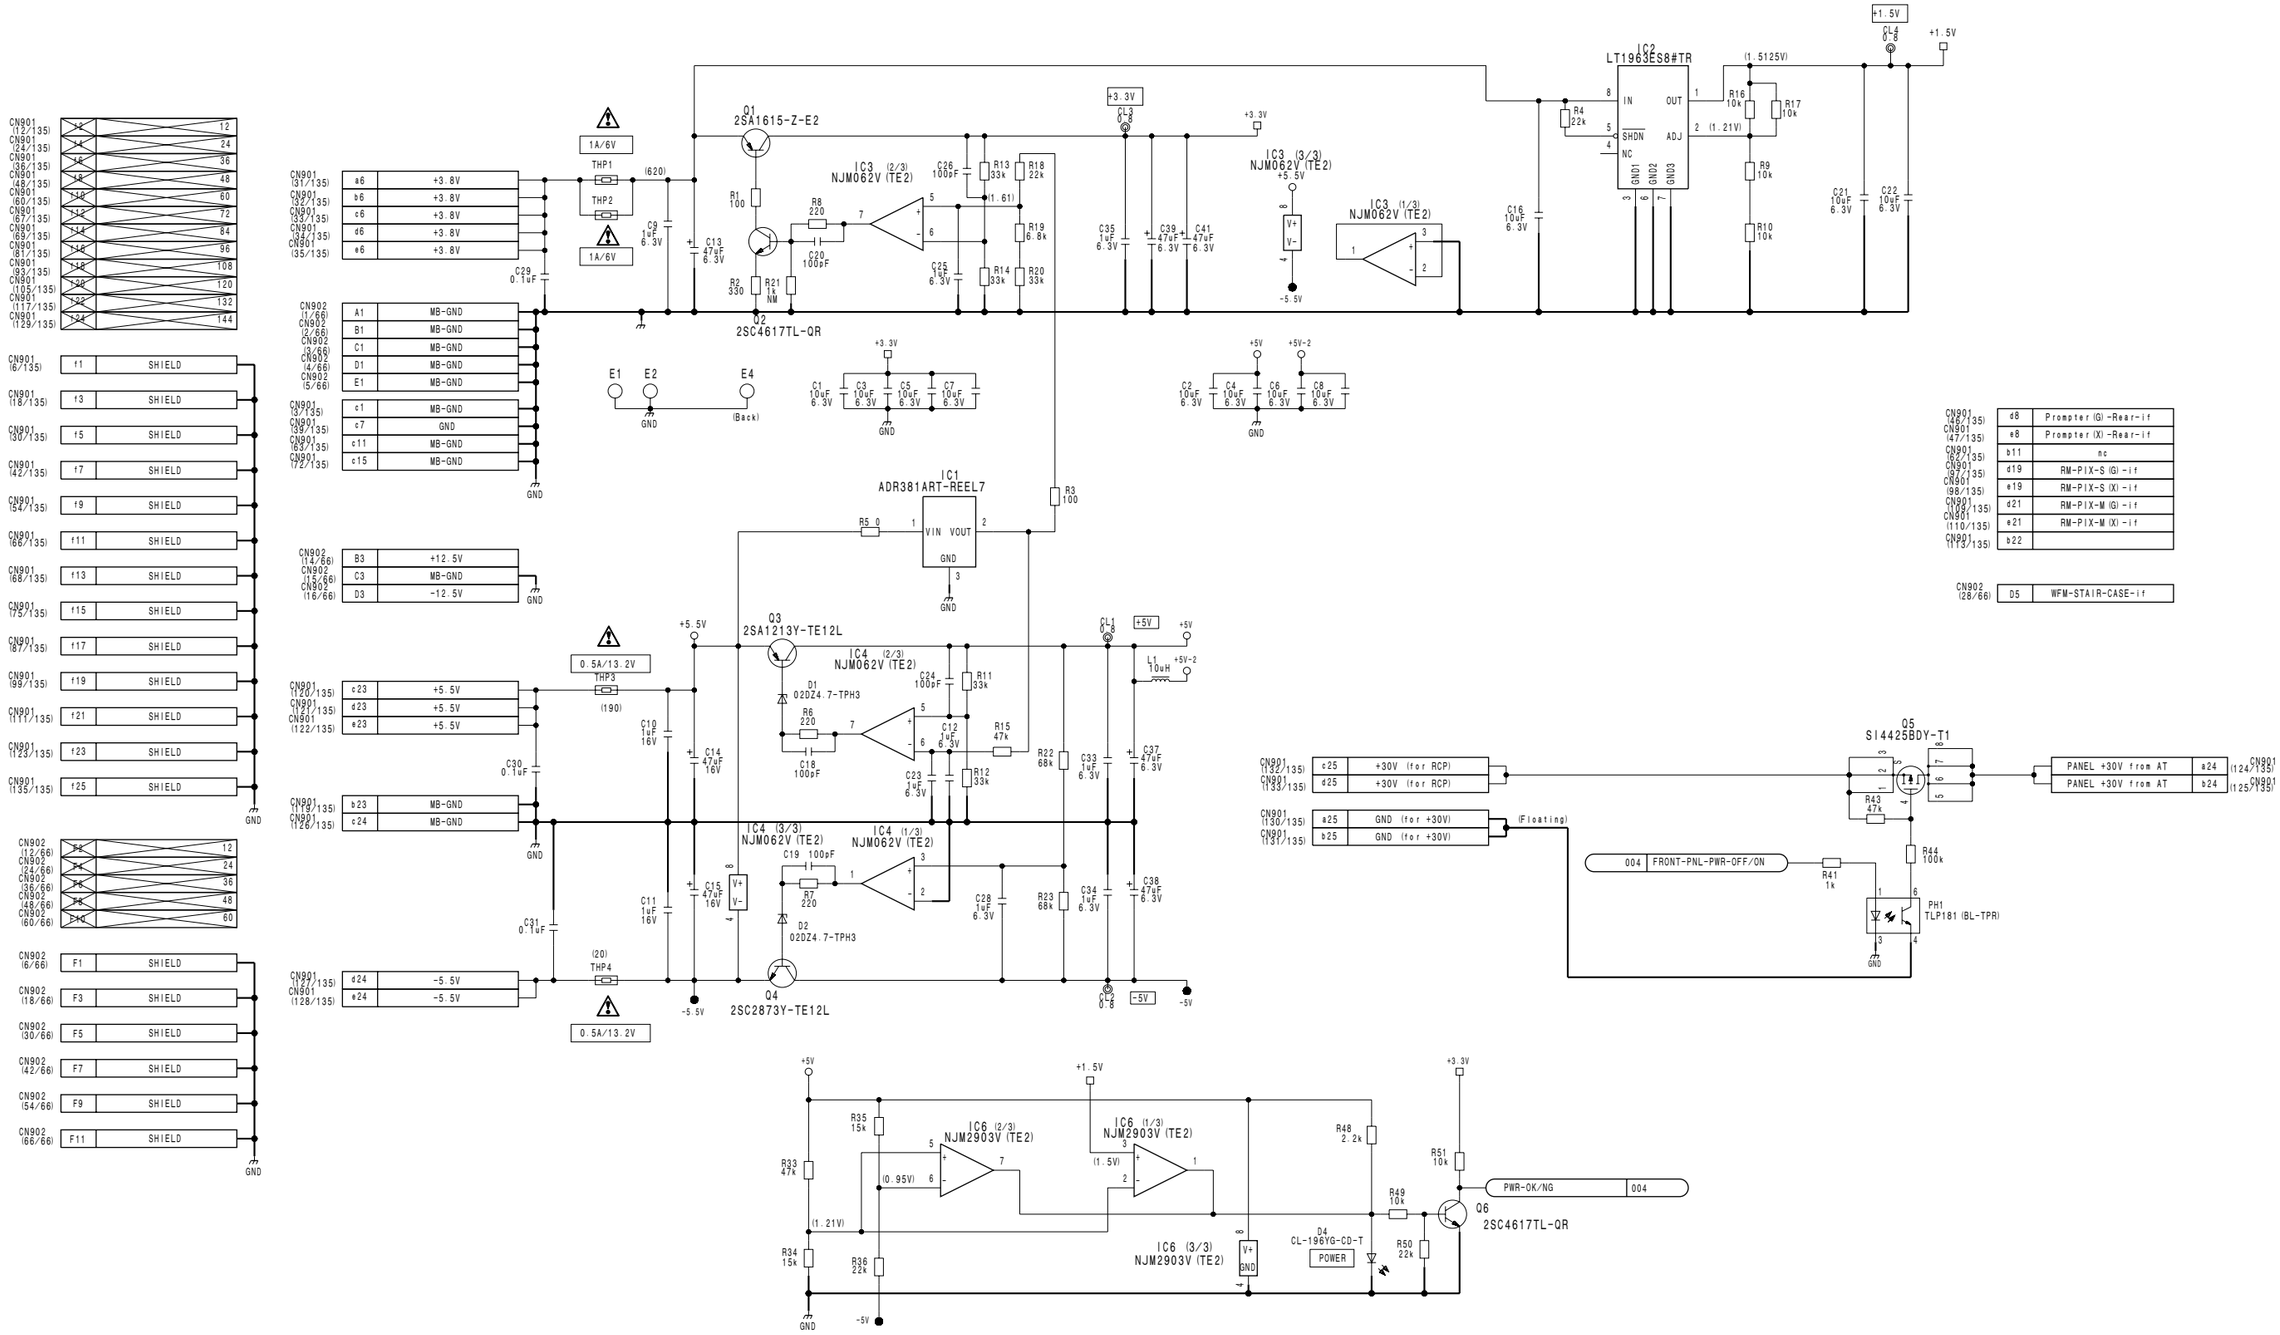


**AT-167S (1/6)**

BOARD NO. 1-867-877-13

HDCU1000_AT-167_013_1

# AT-167S (2/6)
SUFFIX: -13

# AT-167S (2/6)
SUFFIX: -13

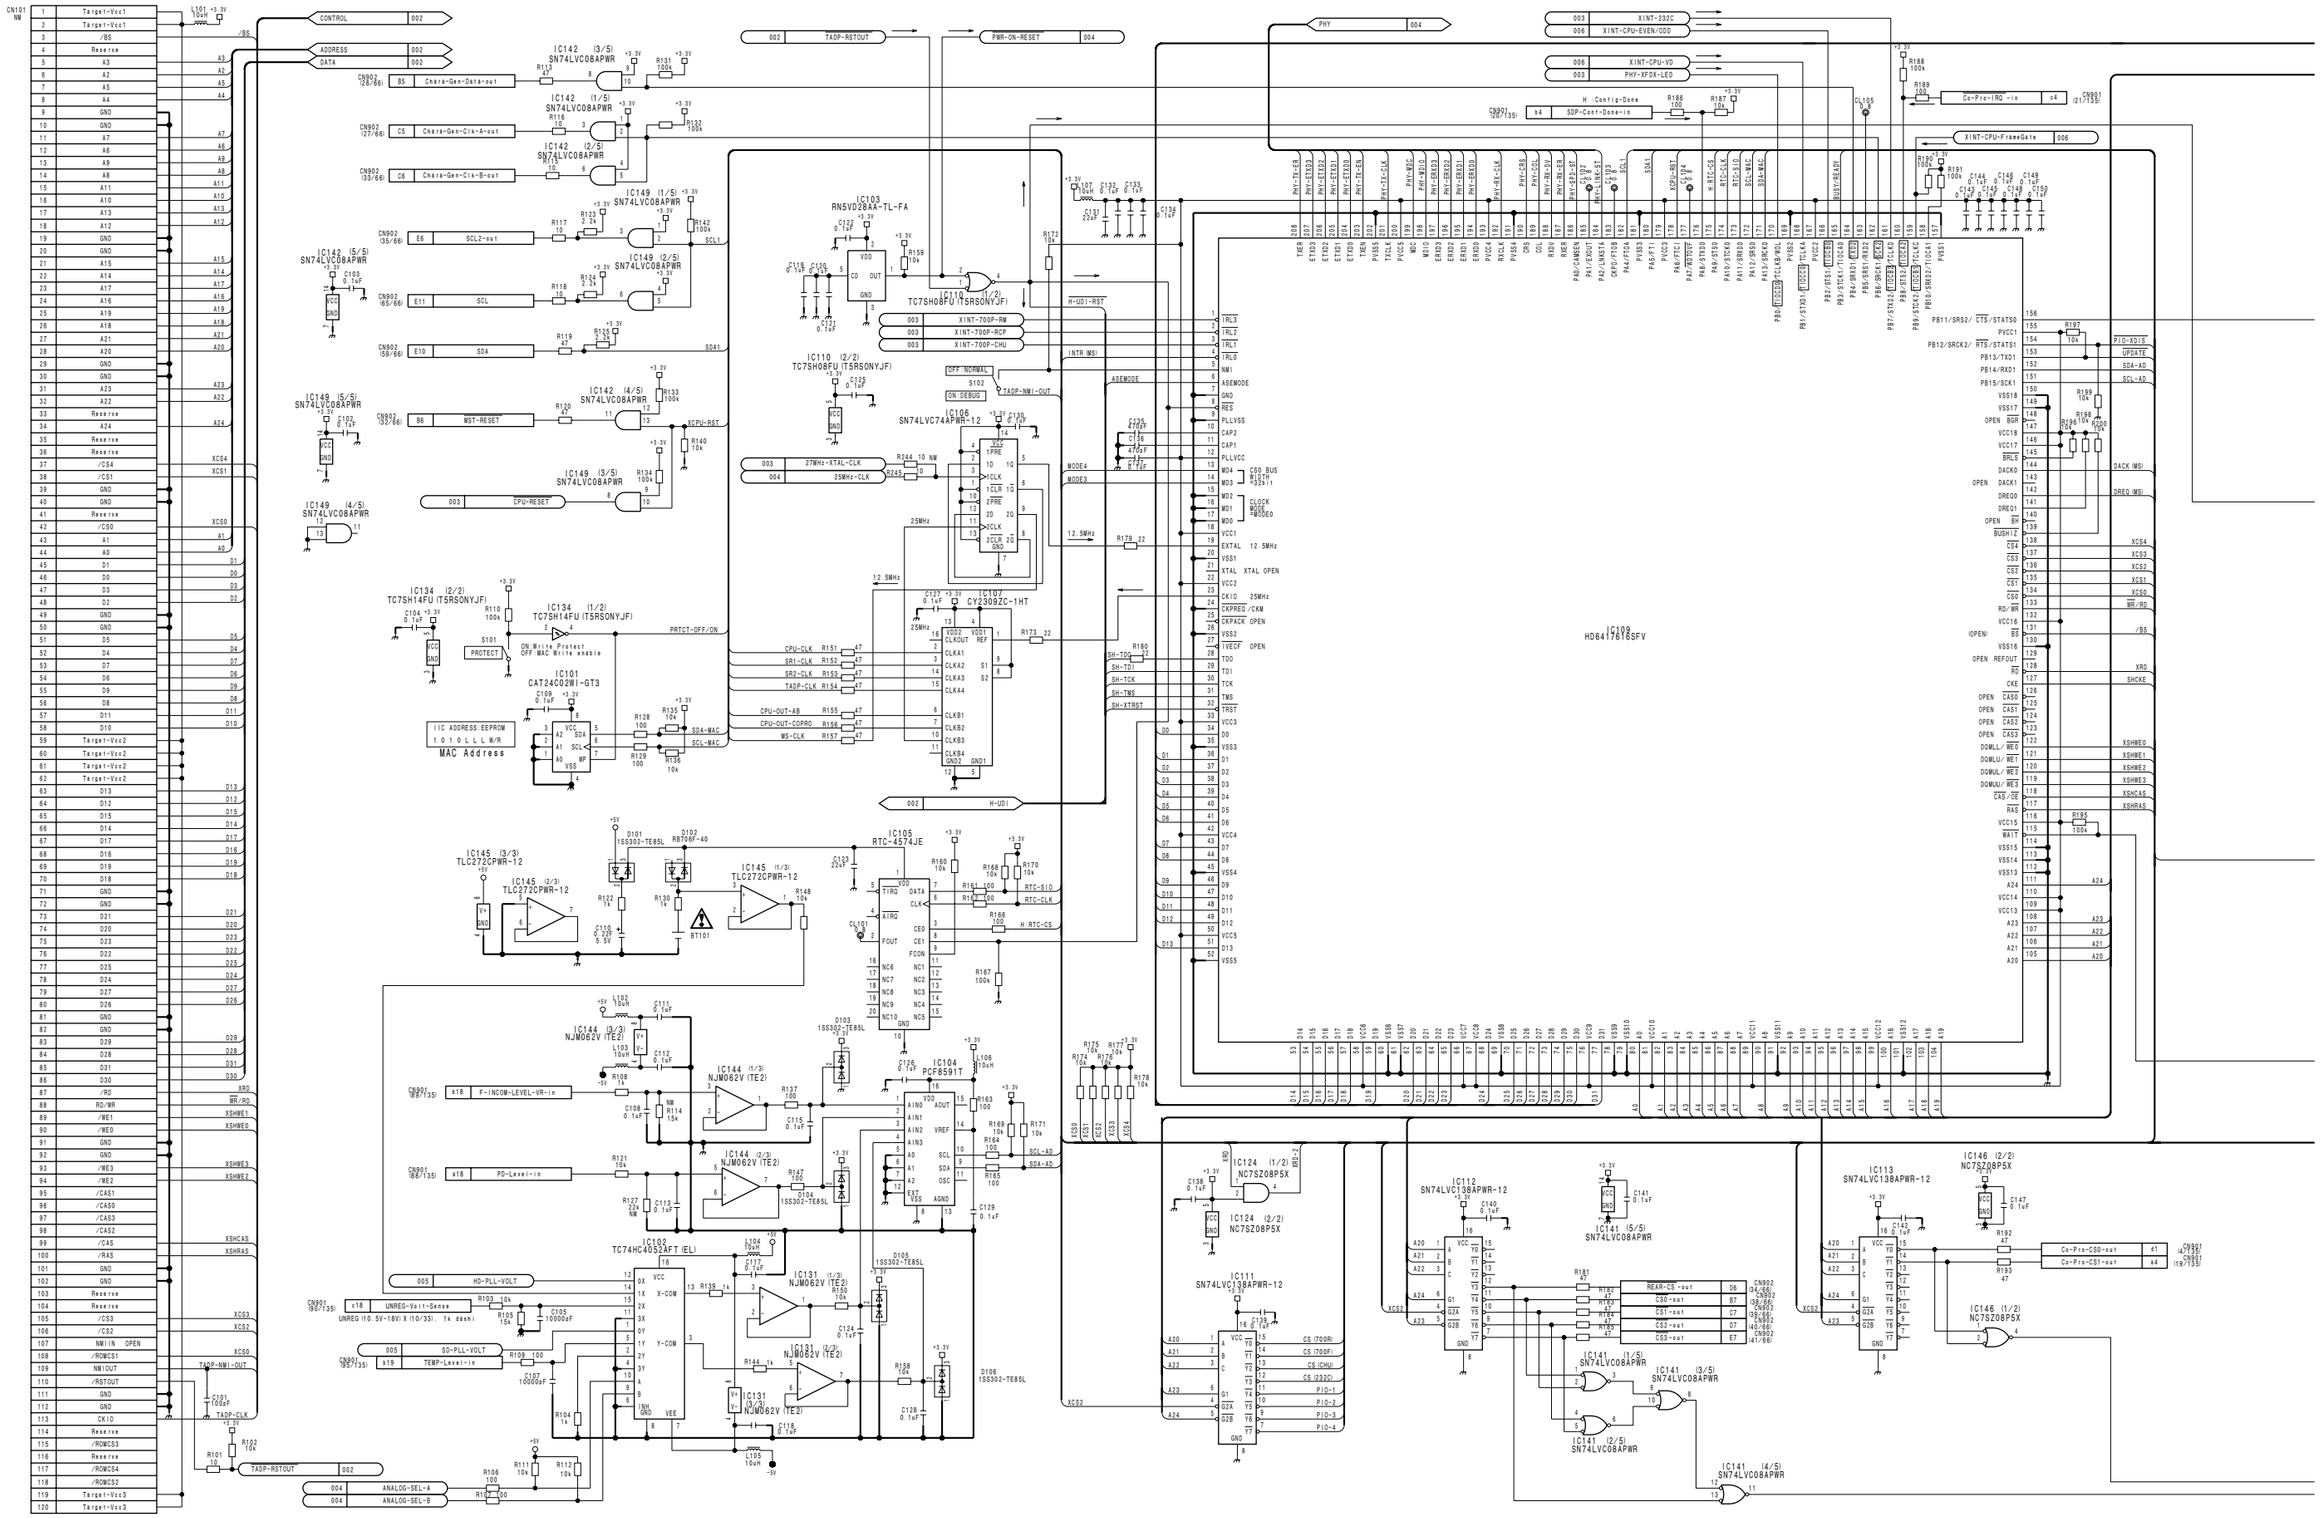

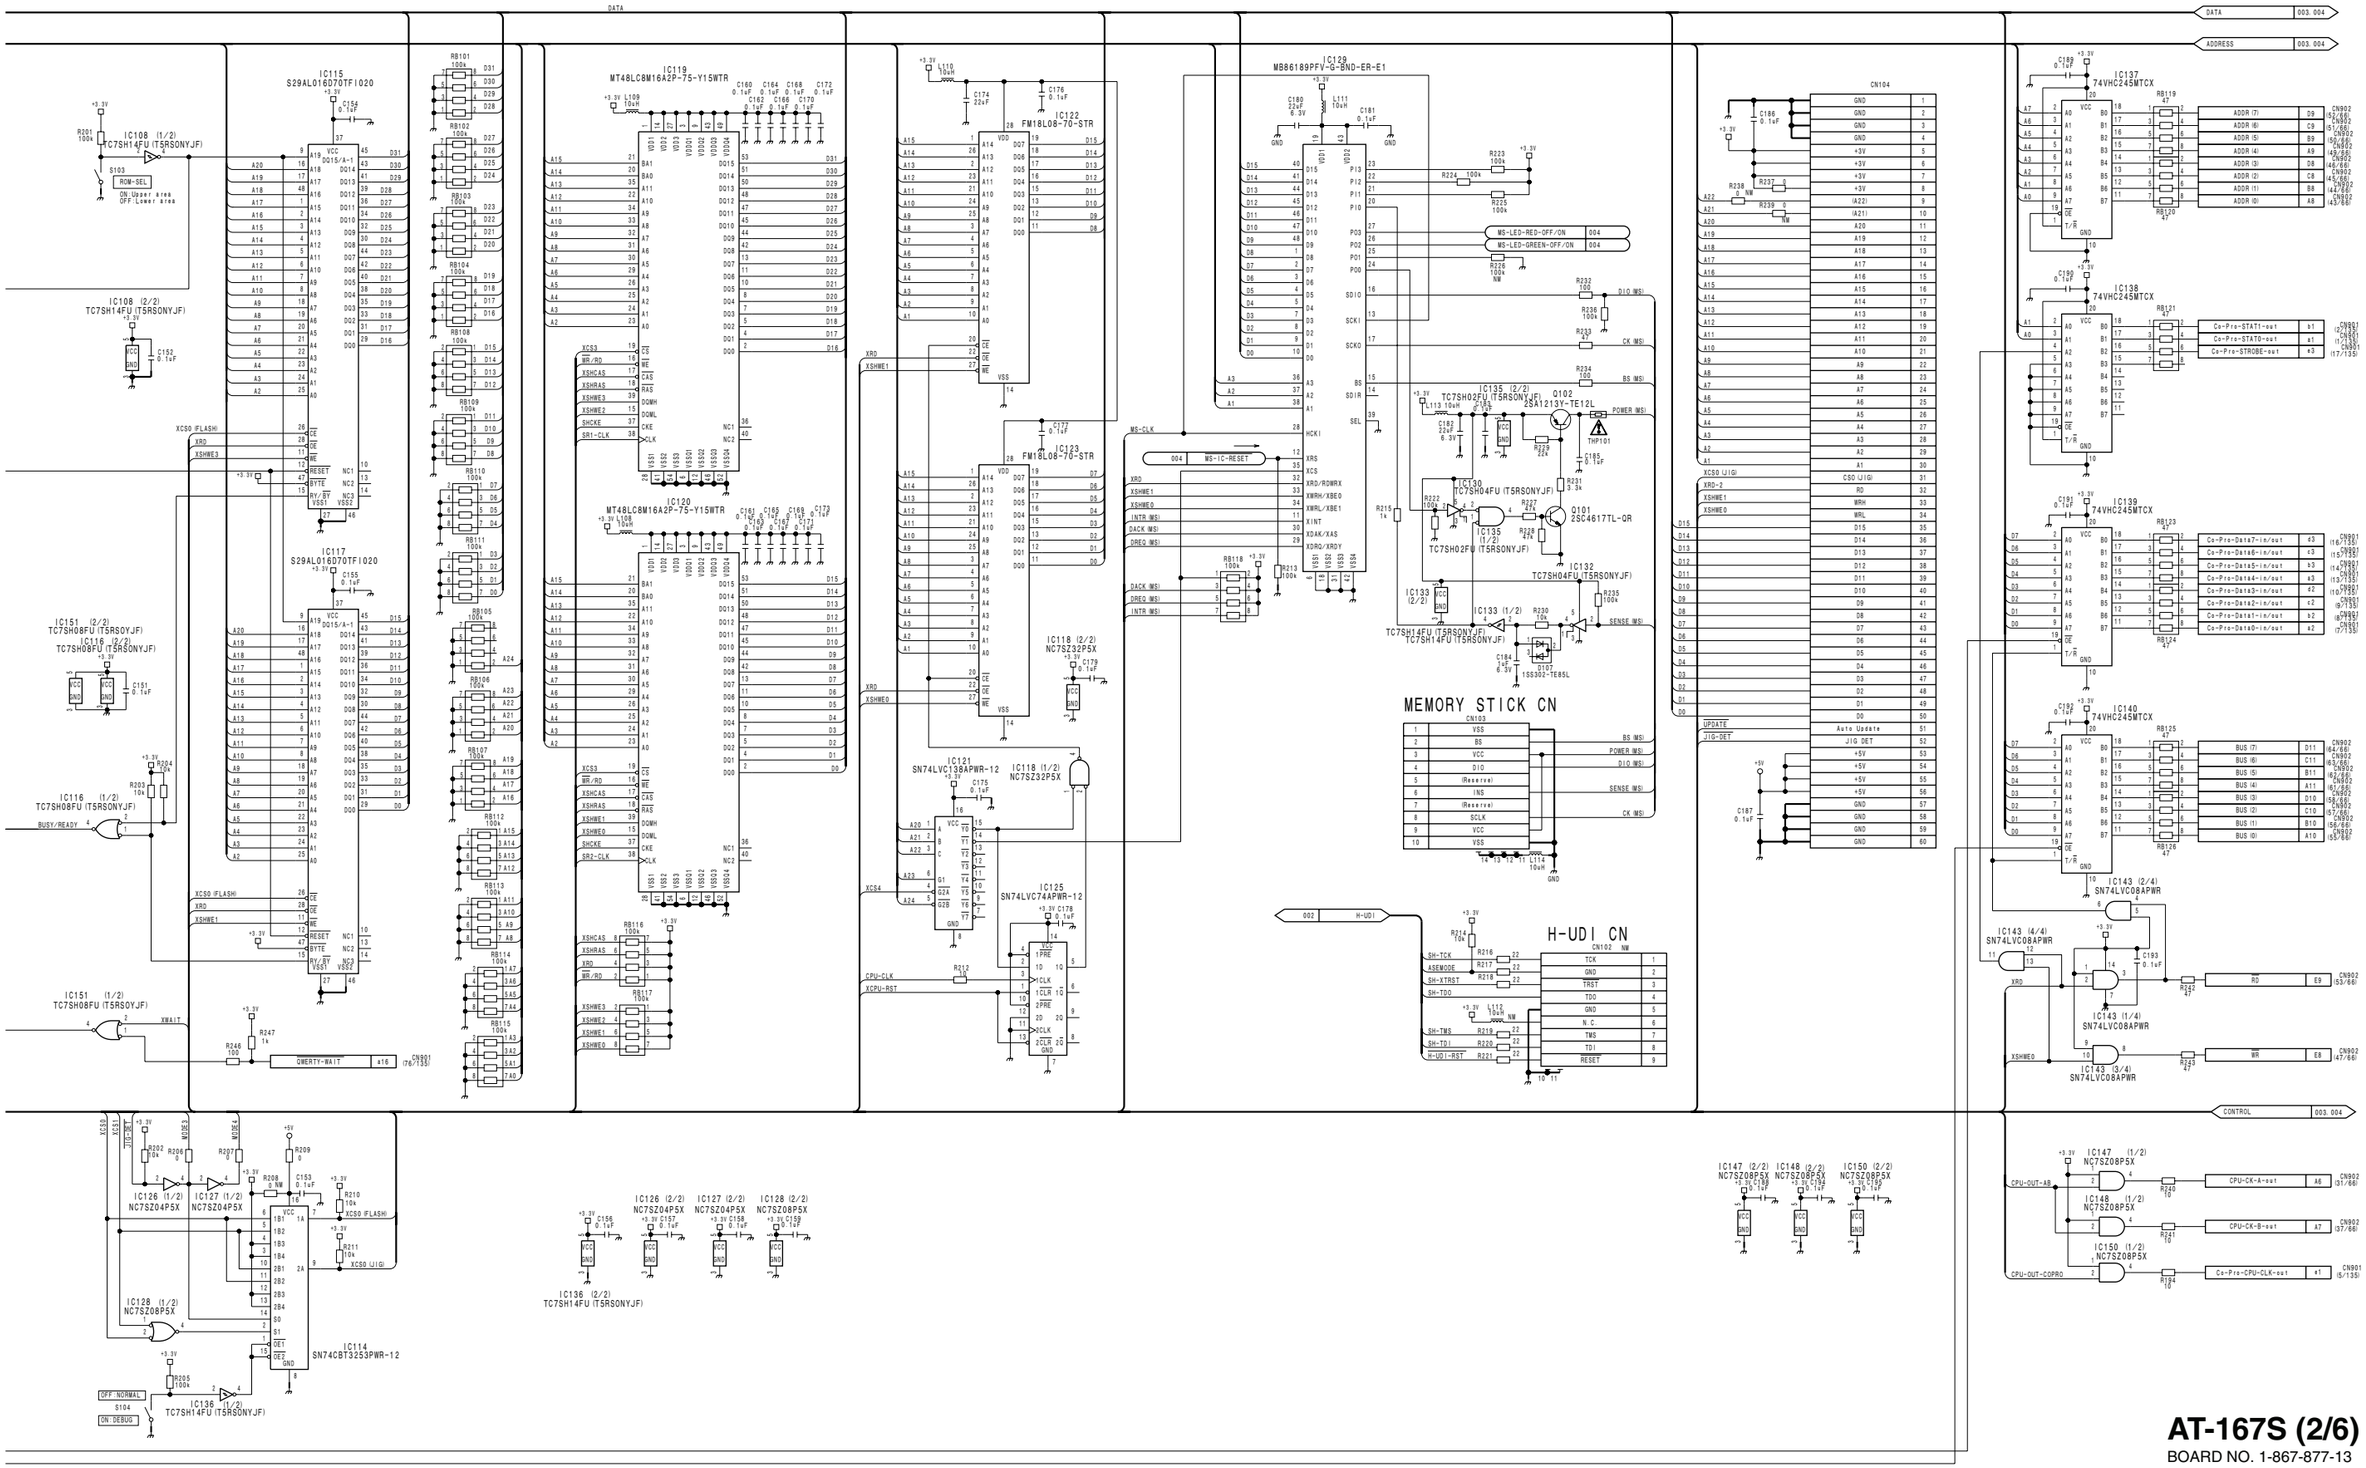


**AT-167S (2/6)**
BOARD NO. 1-867-877-13
HDCU1000_AT-167_013_2

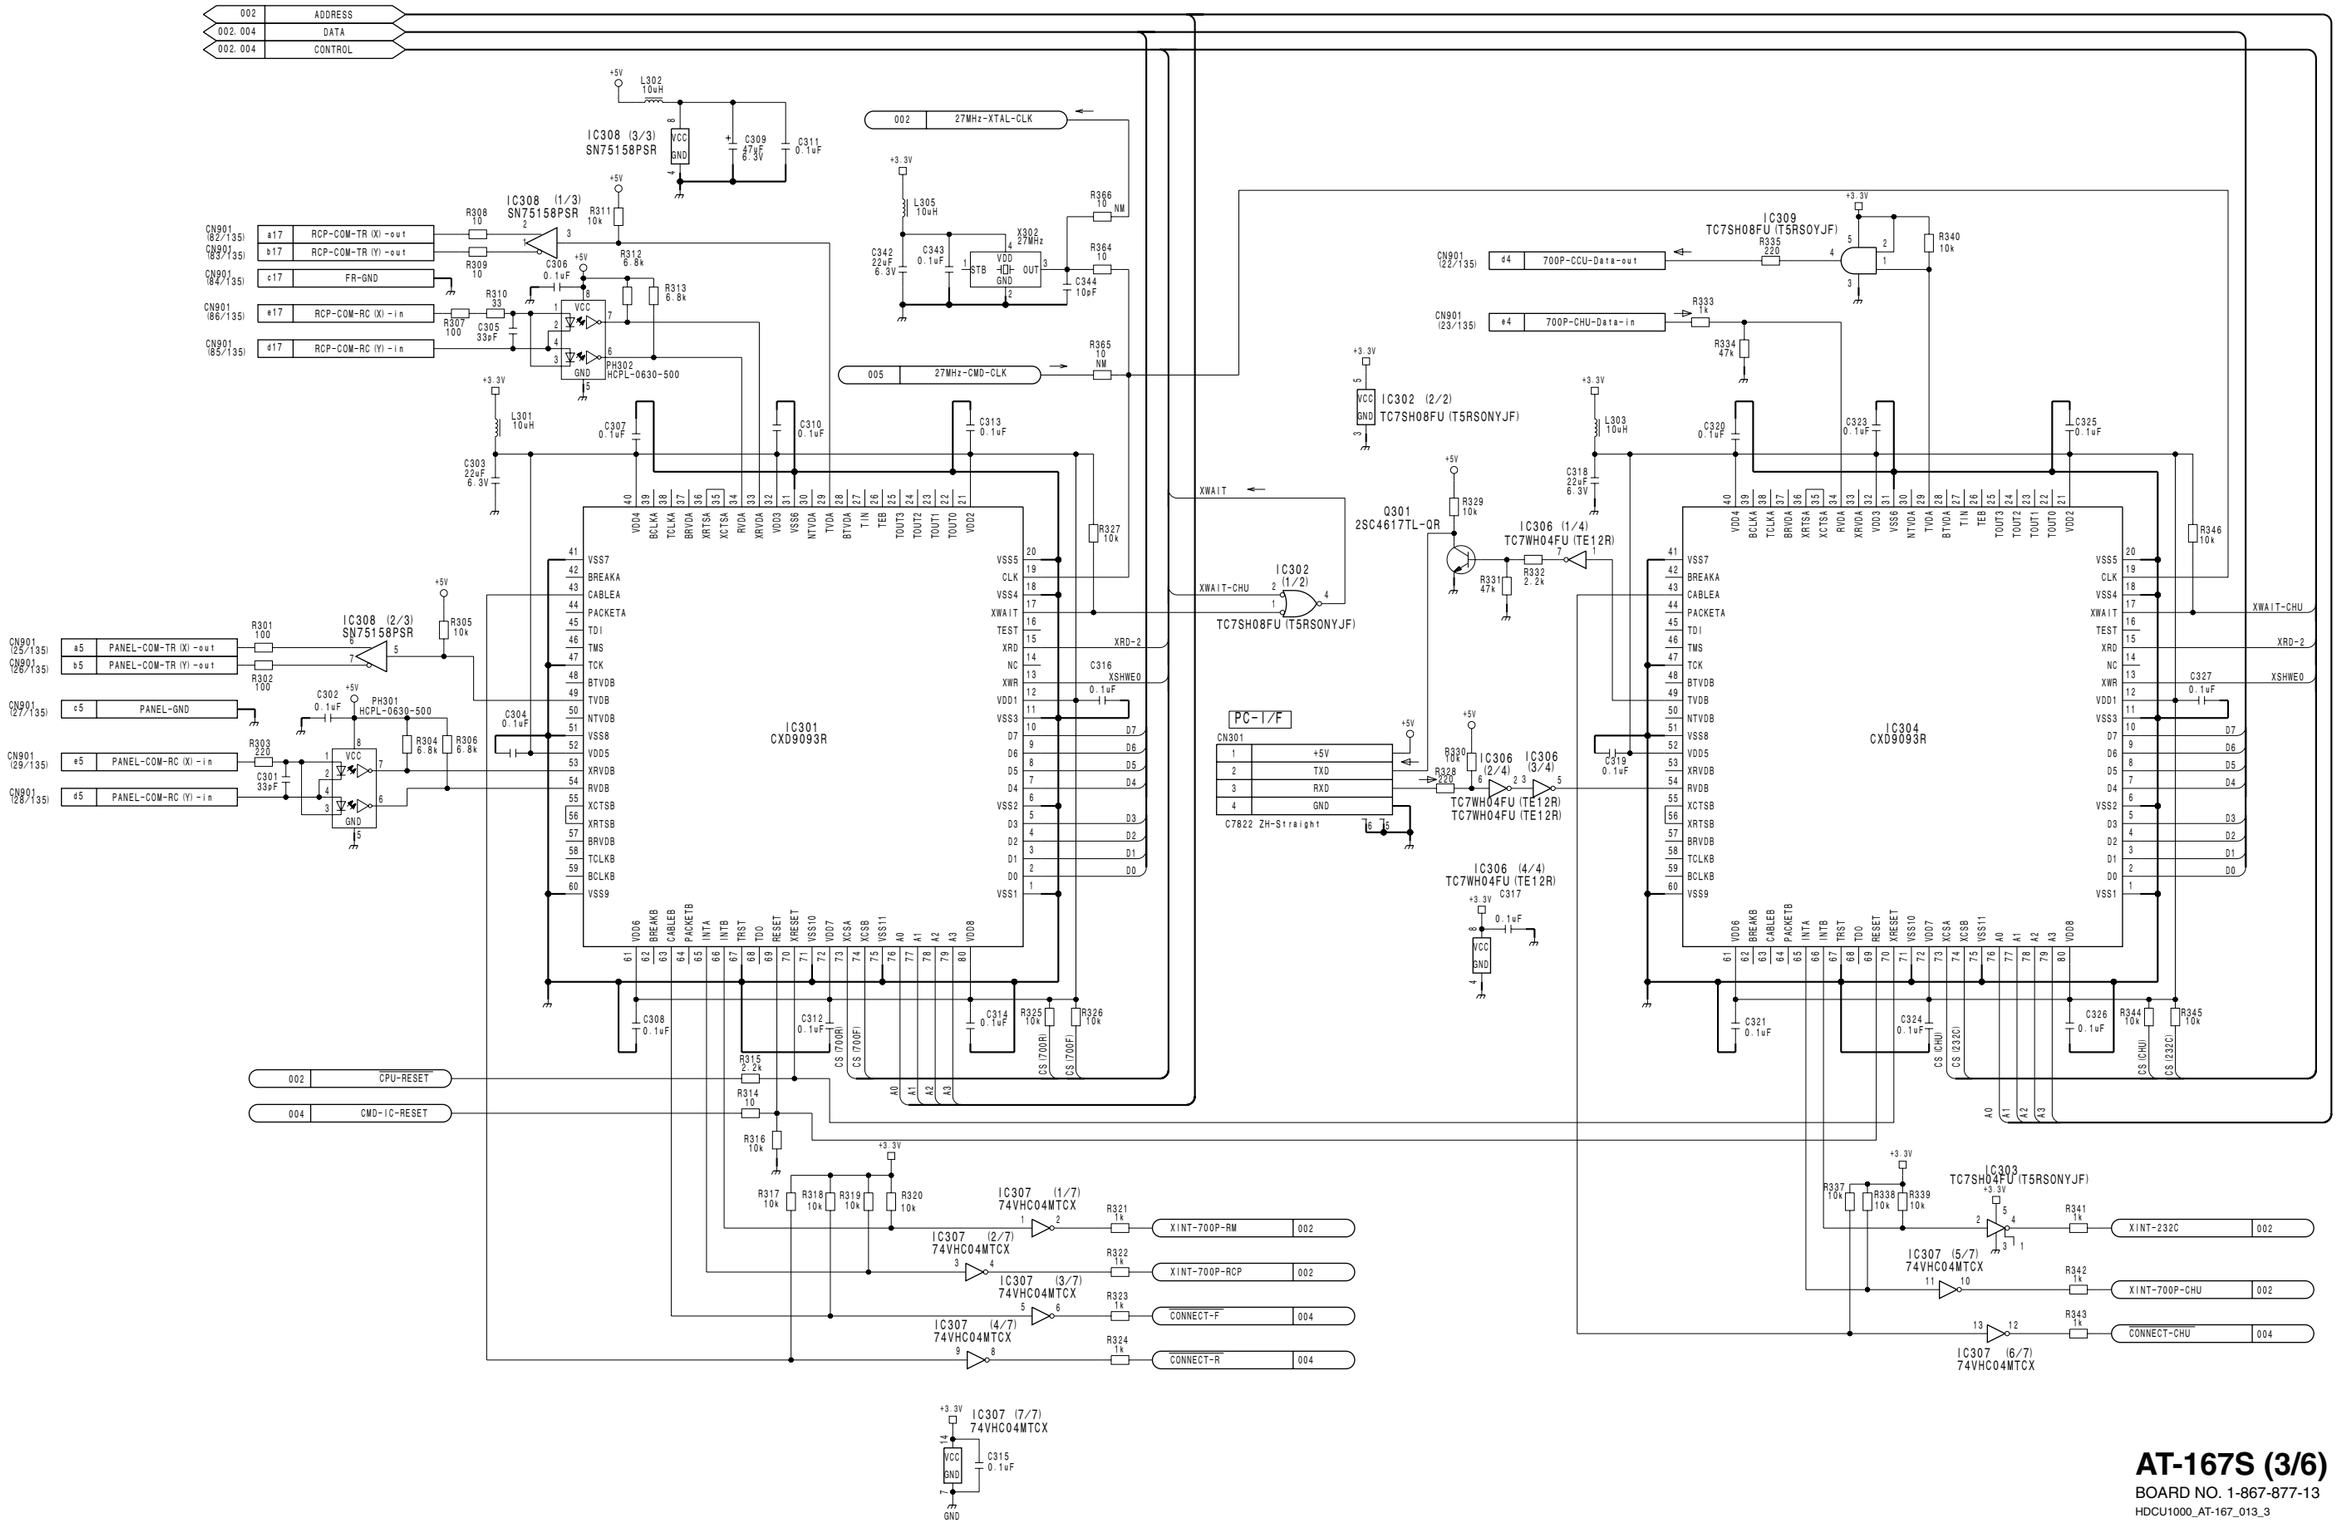


**AT-167S (3/6)**
BOARD NO. 1-867-877-13
HDCU1000_AT-167_013_3

# AT-167S (4/6)
**SUFFIX: -13**


# AT-167S (4/6)
**SUFFIX: -13**


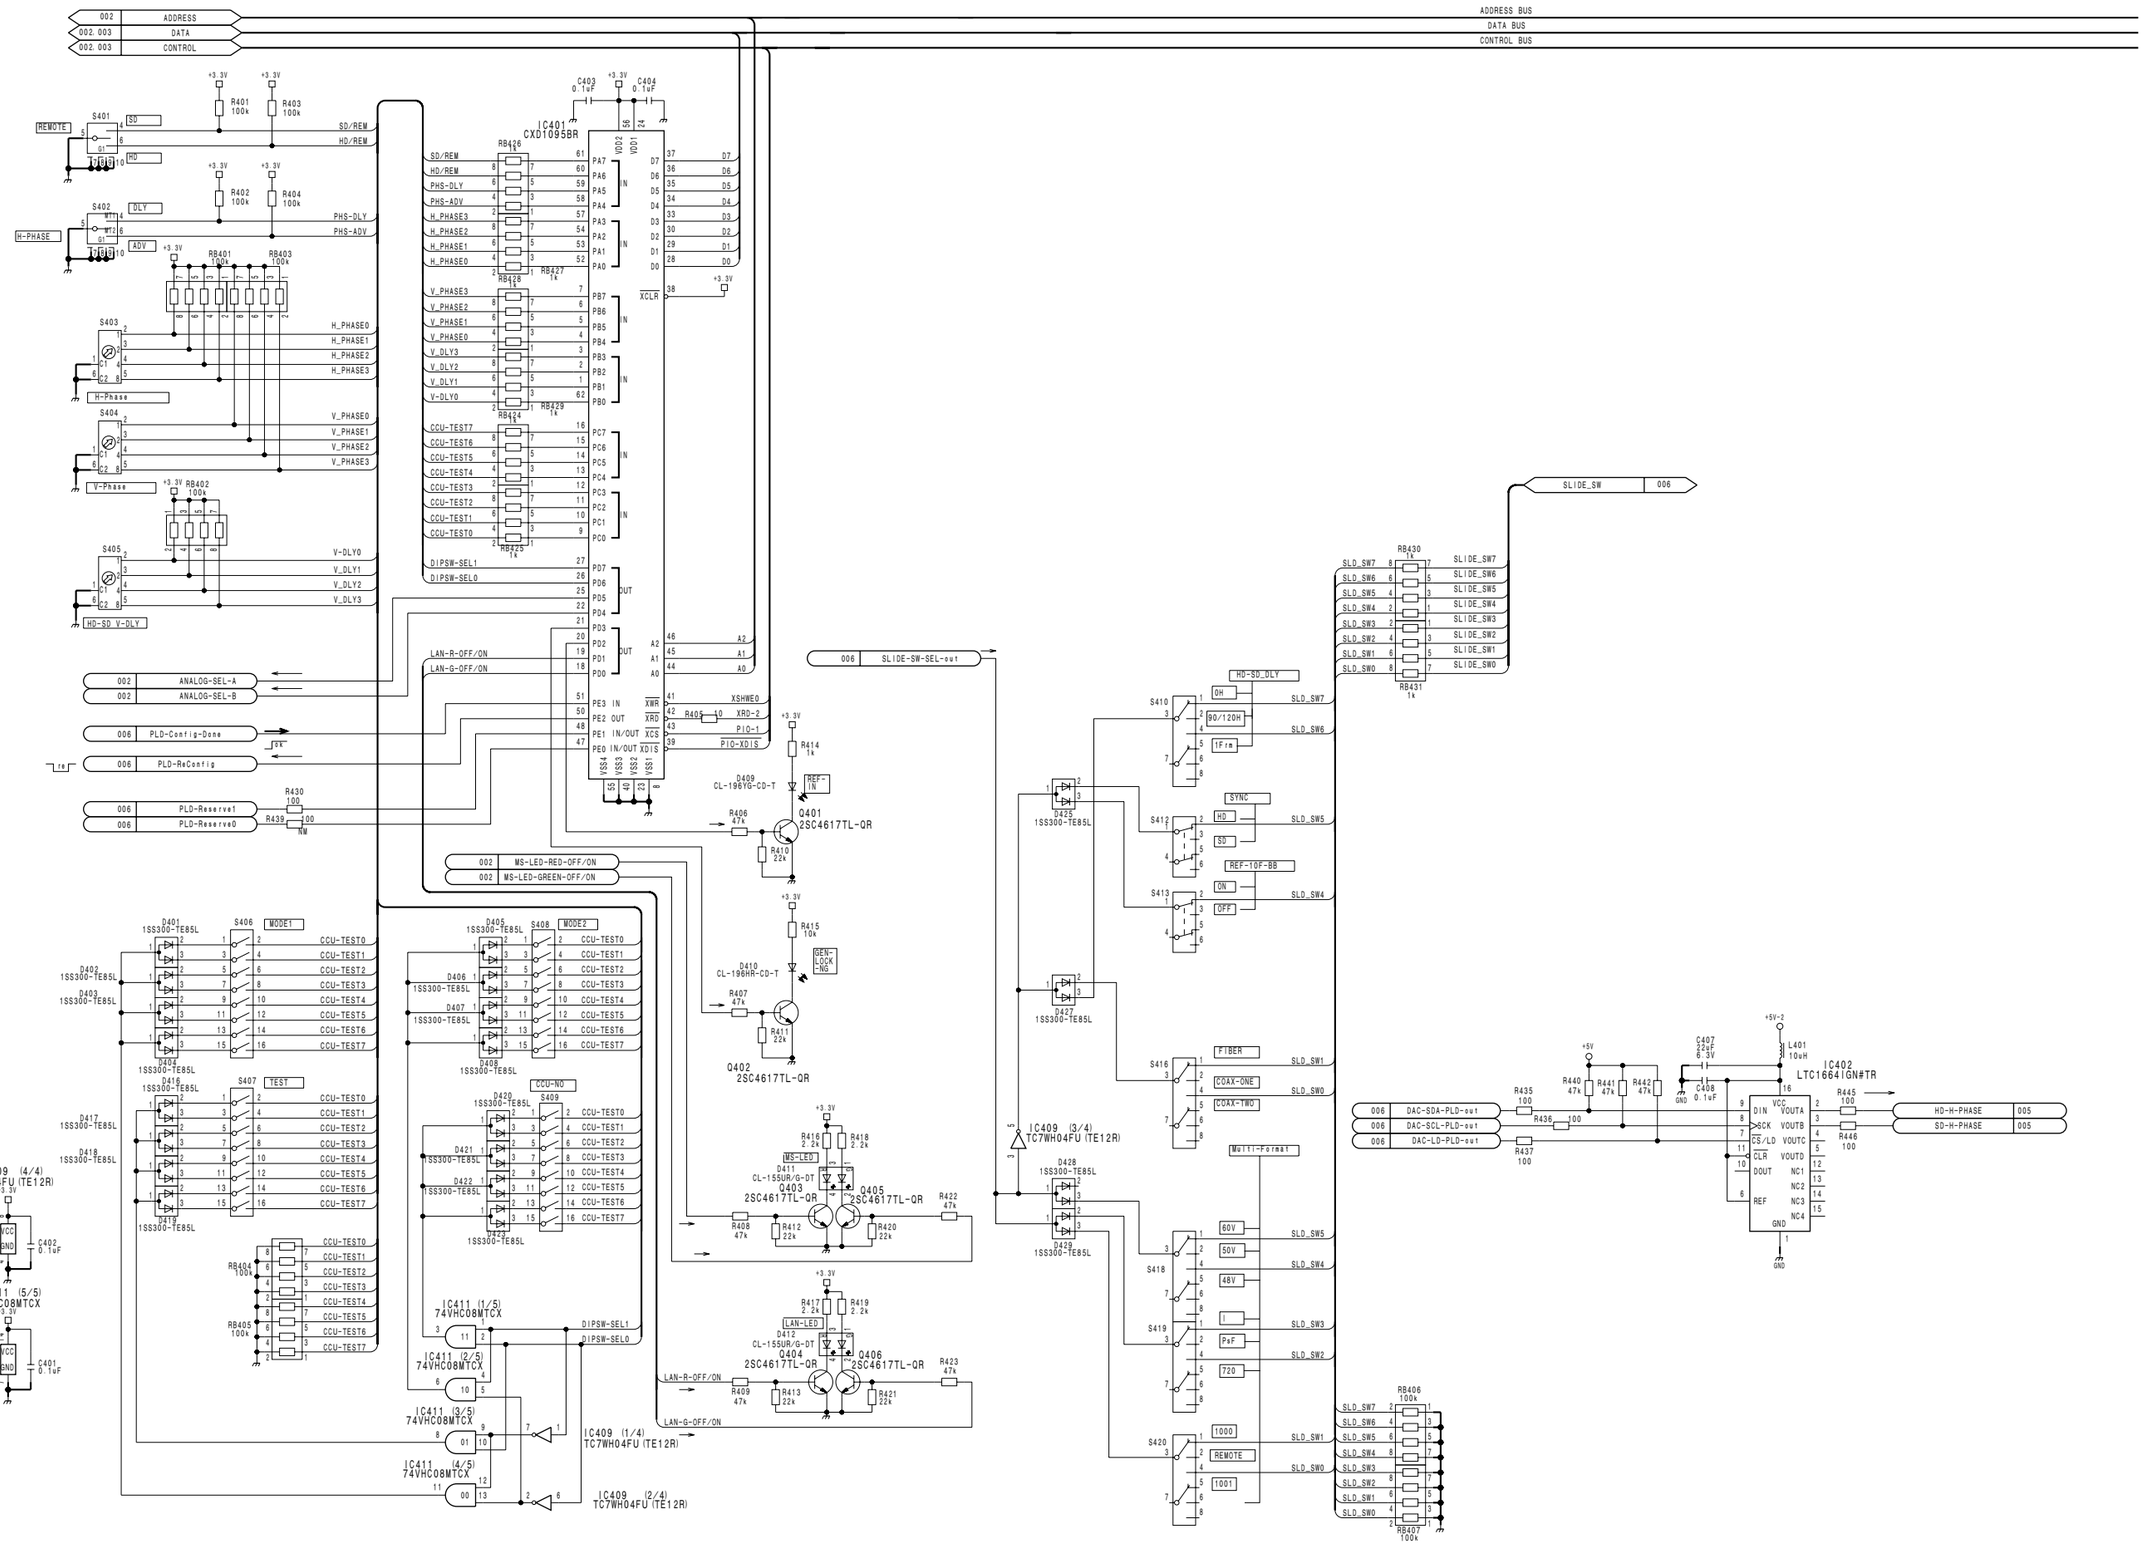

# AT-167S (4/6)
**SUFFIX: -13**

AT-167S (4/6)
SUFFIX: -13

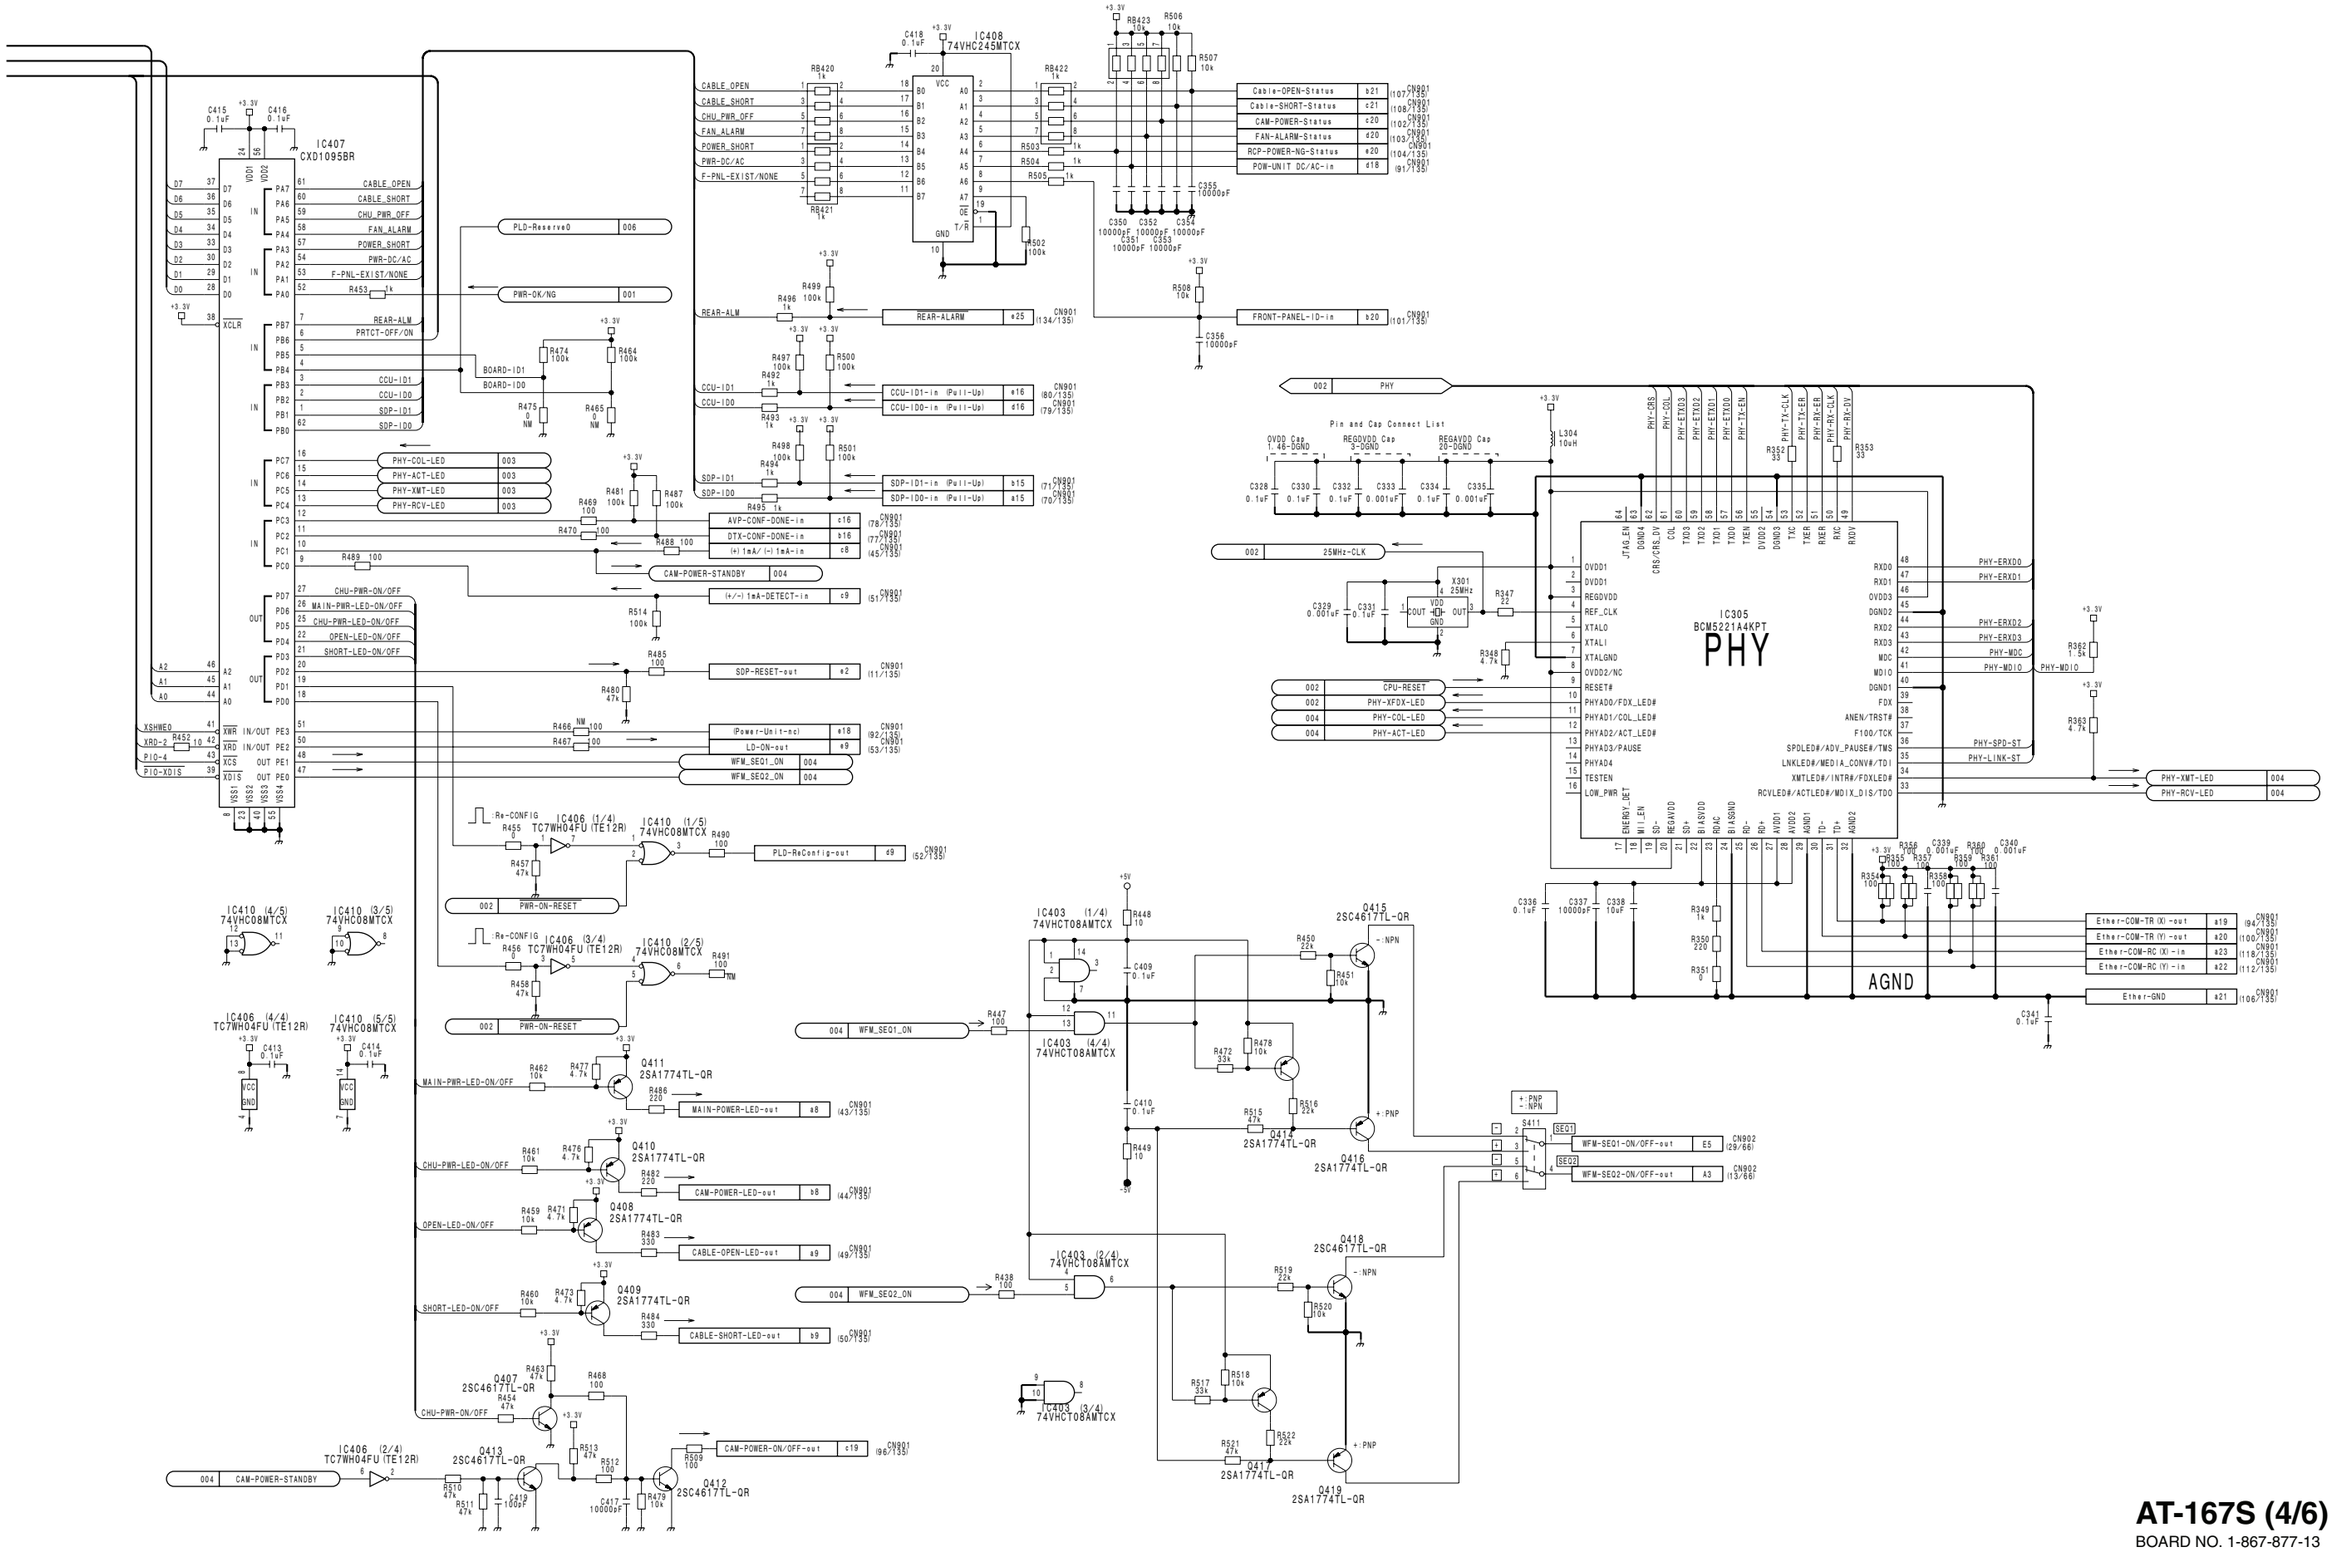

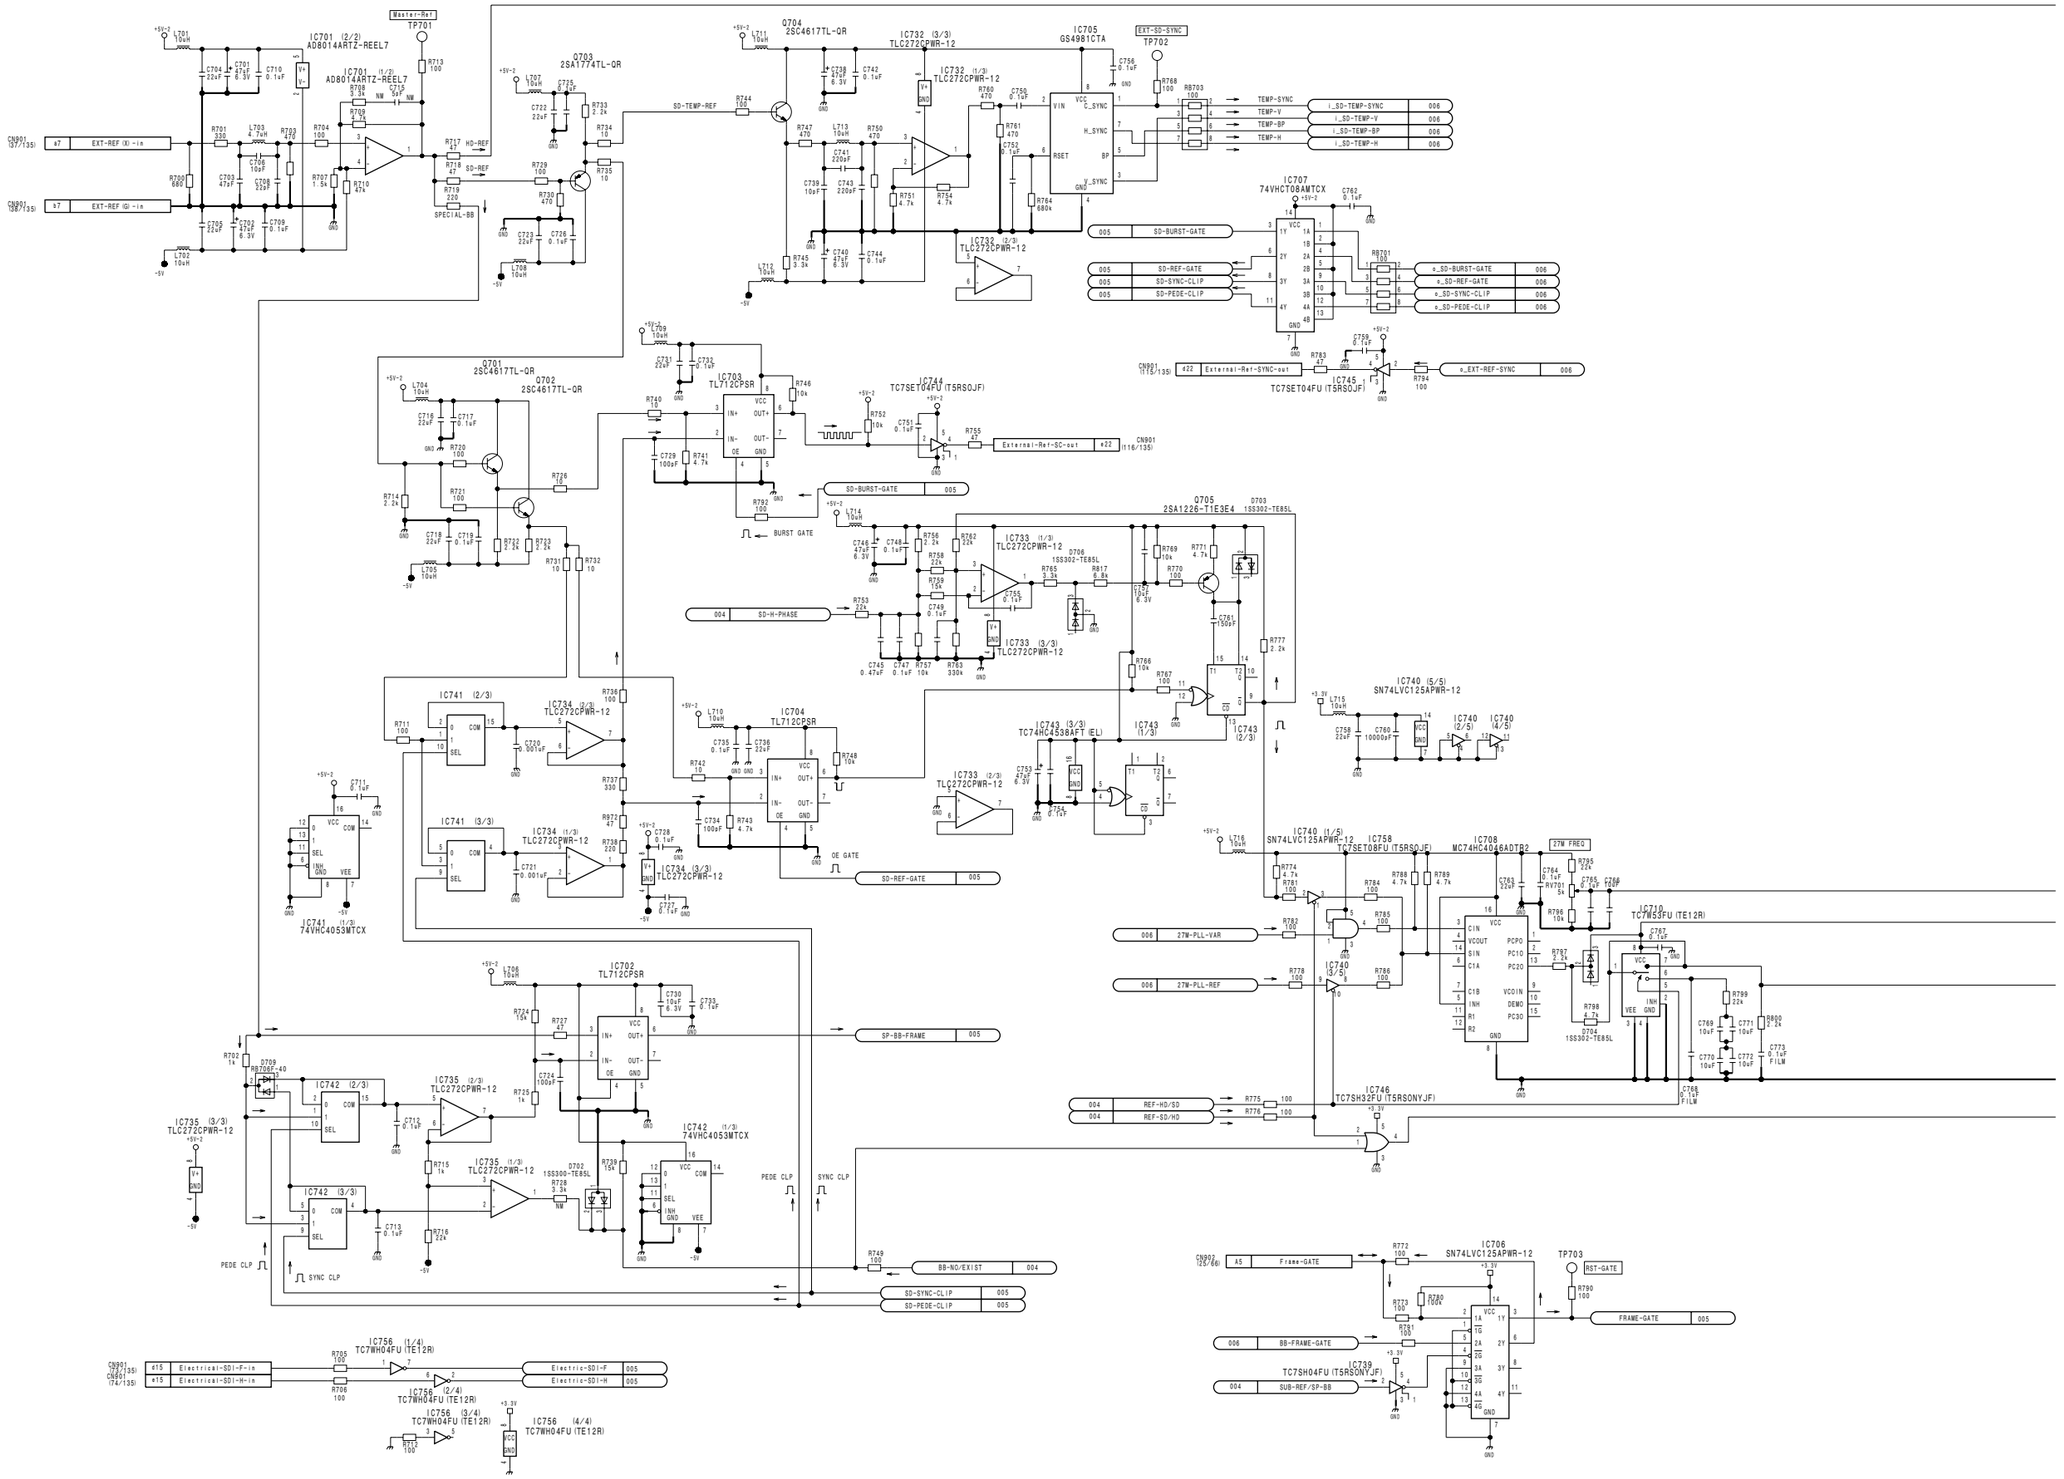
Master-Ref
TP701
IC701 (2/2) AD8014ARTZ-REEL7
IC701 (1/2) AD8014ARTZ-REEL7
EXT-REF (R) -in
EXT-REF (G) -in
HD-REF
SD-REF
SPECIAL-BB
Q703 2SA1774TL-QR
SD-TEMP-REF
Q704 2SC4617TL-QR
IC732 (3/3) TLC272CPWR-12
IC732 (1/3) TLC272CPWR-12
IC705 GS4981CTA
EXT-SD-SYNC
TP702
IC733 (2/3) TLC272CPWR-12
IC707 74VHCT08AMTCX
IC745 TC7SET04FU (T5RSOJF)
Q701 2SC4617TL-QR
Q702 2SC4617TL-QR
IC703 TL712CPSR
IC744 TC7SET04FU (T5RSOJF)
BURST GATE
Q705 2SA1226-T1E3E4
IC733 (1/3) TLC272CPWR-12
IC733 (3/3) TLC272CPWR-12
IC741 (2/3)
IC734 (3/3) TLC272CPWR-12
IC704 TL712CPSR
IC743 (3/3) TC74HC4538AFT (EL)
IC743 (1/3)
IC743 (2/3)
IC740 (5/5) SN74LVC125APWR-12
IC740 (2/5)
IC740 (4/5)
IC741 (3/3)
IC734 (1/3) TLC272CPWR-12
IC734 (2/3) TLC272CPWR-12
OE GATE
SD-REF-GATE
IC741 (1/3) 74VHC4053MTCX
IC740 (1/5) SN74LVC125APWR-12
IC758 TC7SET08FU (T5RSOJF)
IC708 MC74HC4046ADTR2
27M FREQ
IC710 TC7W53FU (TE12R)
IC702 TL712CPSR
IC735 (3/3) TLC272CPWR-12
IC735 (2/3) TLC272CPWR-12
IC735 (1/3) TLC272CPWR-12
IC742 (2/3)
IC742 (3/3)
IC742 (1/3) 74VHC4053MTCX
IC740 (3/5)
IC746 TC7SH32FU (T5RSONYJF)
PEDE CLP
SYNC CLP
IC706 SN74LVC125APWR-12
IC739 TC7SH04FU (T5RSONYJF)
IC756 (1/4) TC7WH04FU (TE12R)
IC756 (2/4) TC7WH04FU (TE12R)
IC756 (3/4) TC7WH04FU (TE12R)
IC756 (4/4) TC7WH04FU (TE12R)
SP-BB-FRAME
BB-NO/EXIST
SD-SYNC-CLIP
SD-PEDE-CLIP
FRAME-GATE
RST-GATE
TEMP-SYNC
TEMP-V
TEMP-BP
TEMP-H
SD-BURST-GATE
SD-REF-GATE
SD-SYNC-CLIP
SD-PEDE-CLIP
External-Ref-SYNC-out
External-Ref-SC-out
27M-PLL-VAR
27M-PLL-REF
REF-HD/SD
REF-SD/HD
Frame-GATE
BB-FRAME-GATE
SUB-REF/SP-BB
Electrical-SDI-F-in
Electrical-SDI-H-in
Electric-SDI-F
Electric-SDI-H
SD-H-PHASE

# AT-167S (5/6)
SUFFIX: -13

AT-167S (5/6)
SUFFIX: -13

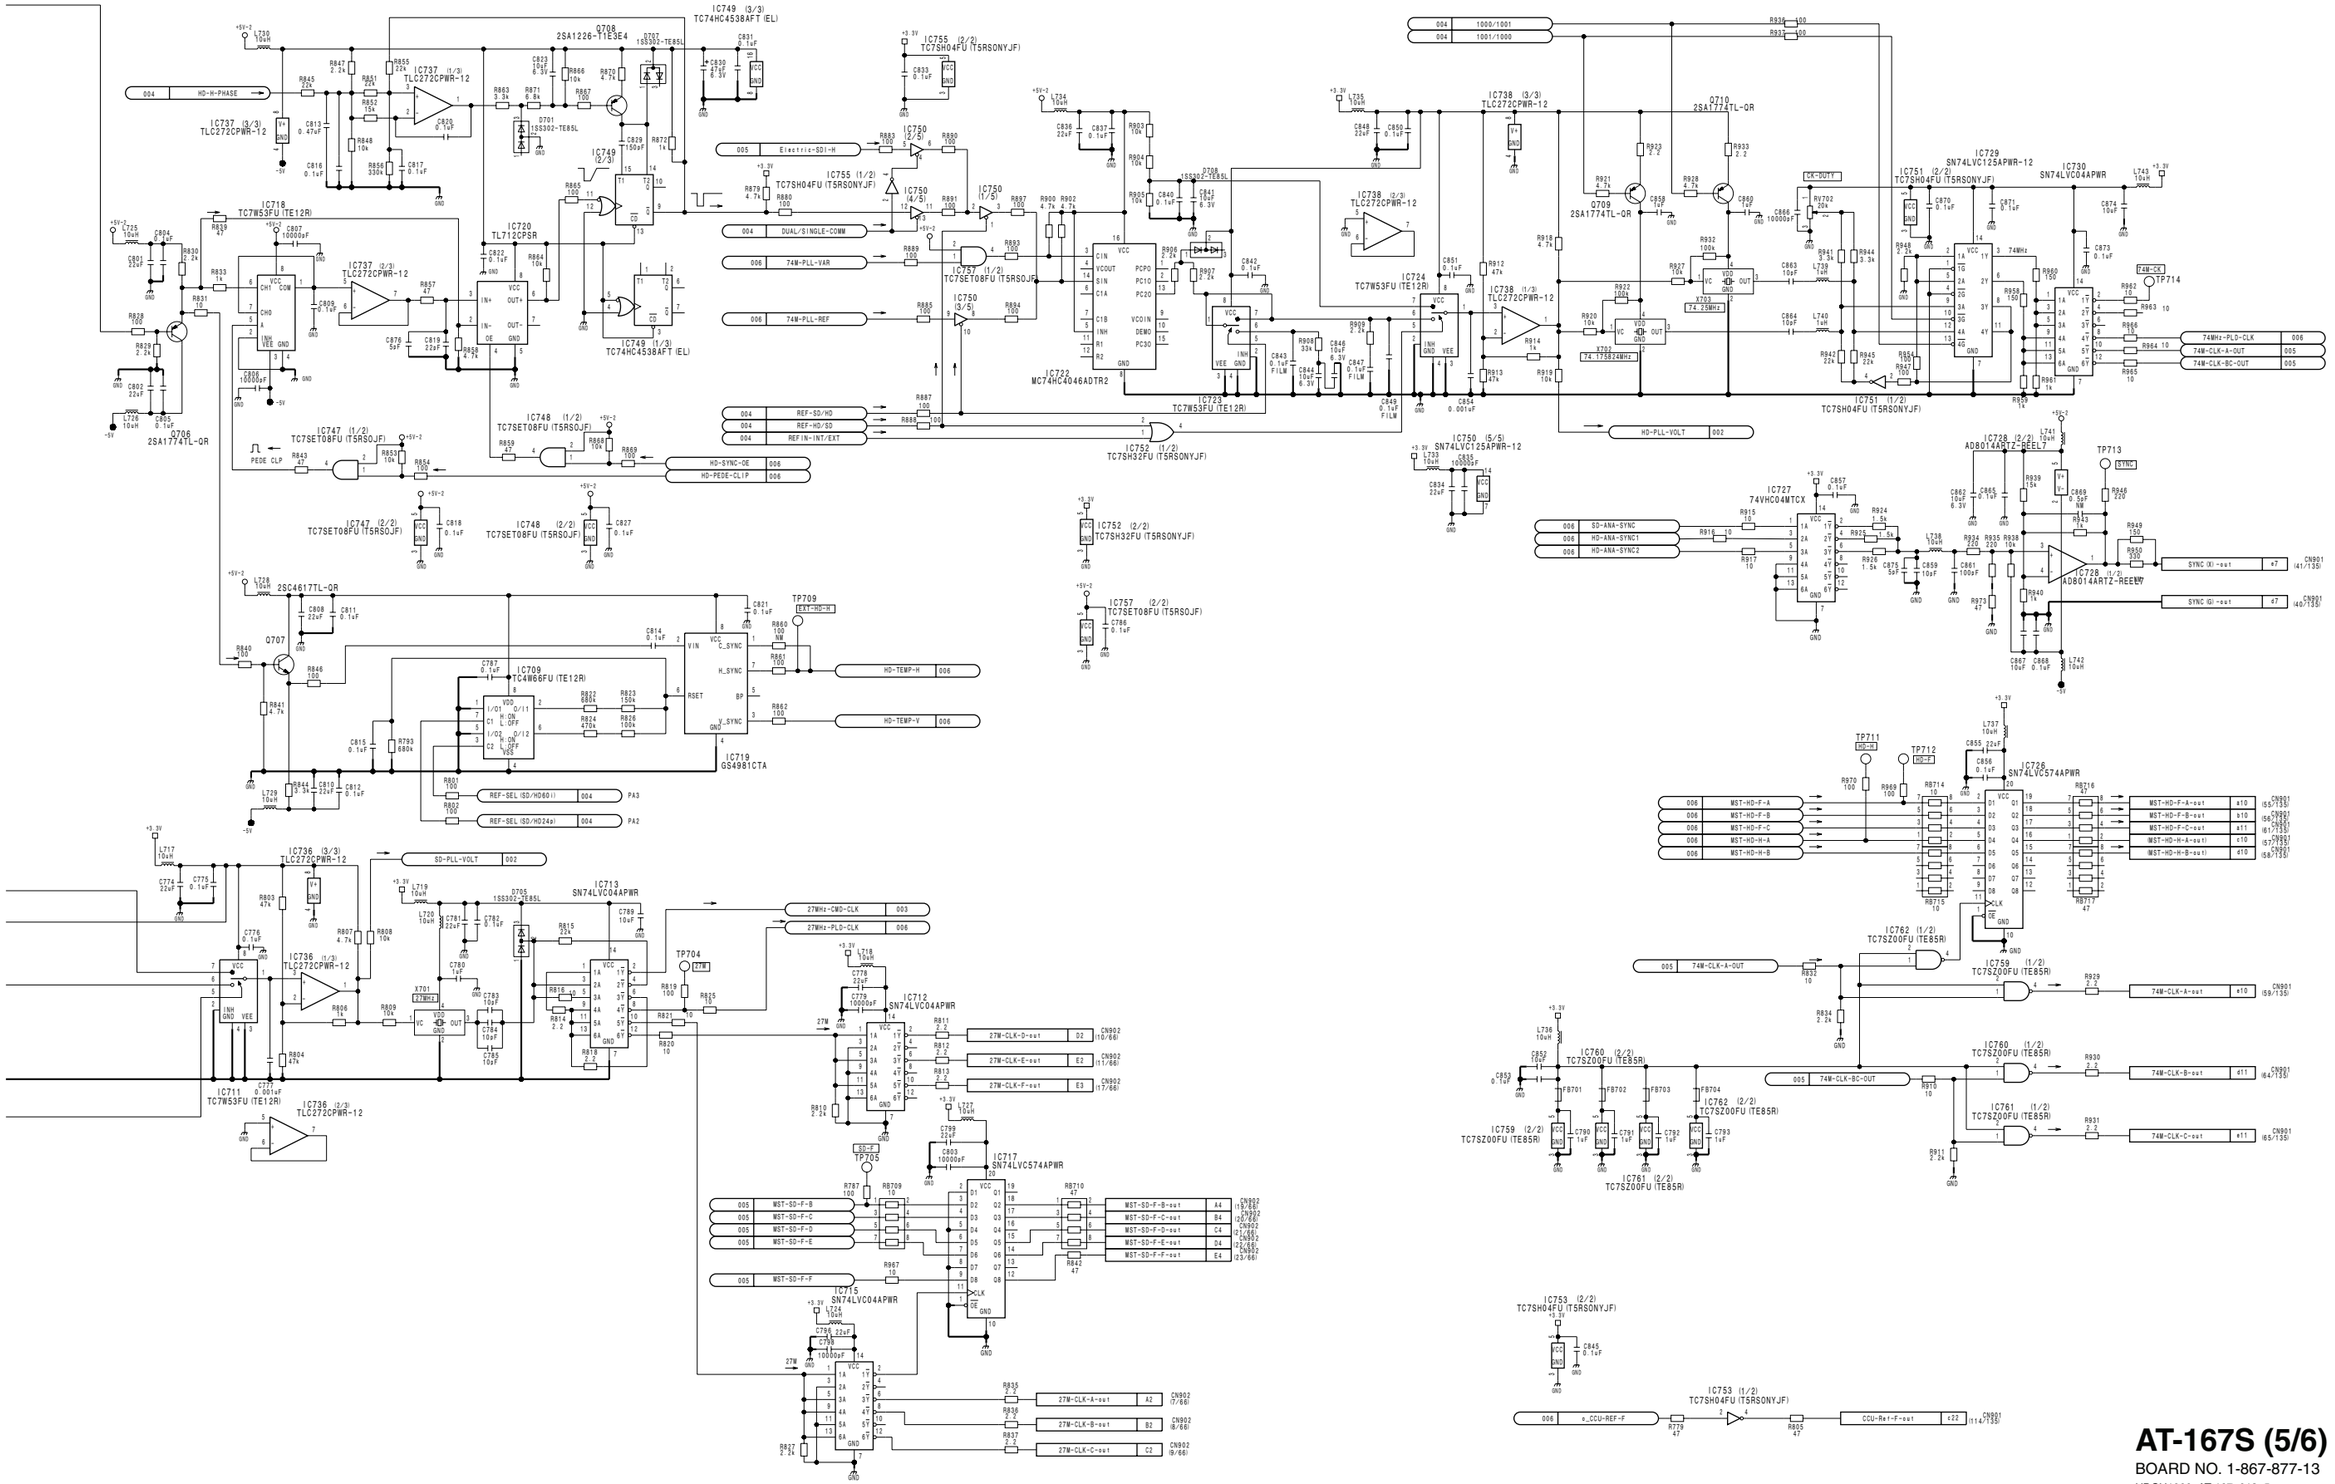


AT-167S (5/6)
BOARD NO. 1-867-877-13
HDCU1000_AT-167_013_5

HDCU3300/MM (J,E)

7-11

7-11

I J K L M N O P

# AT-167S (6/6)
**SUFFIX: -13**

AT-167S (6/6)
SUFFIX: -13

PLD:Revolutions!
EP1C12F324C8N (300)

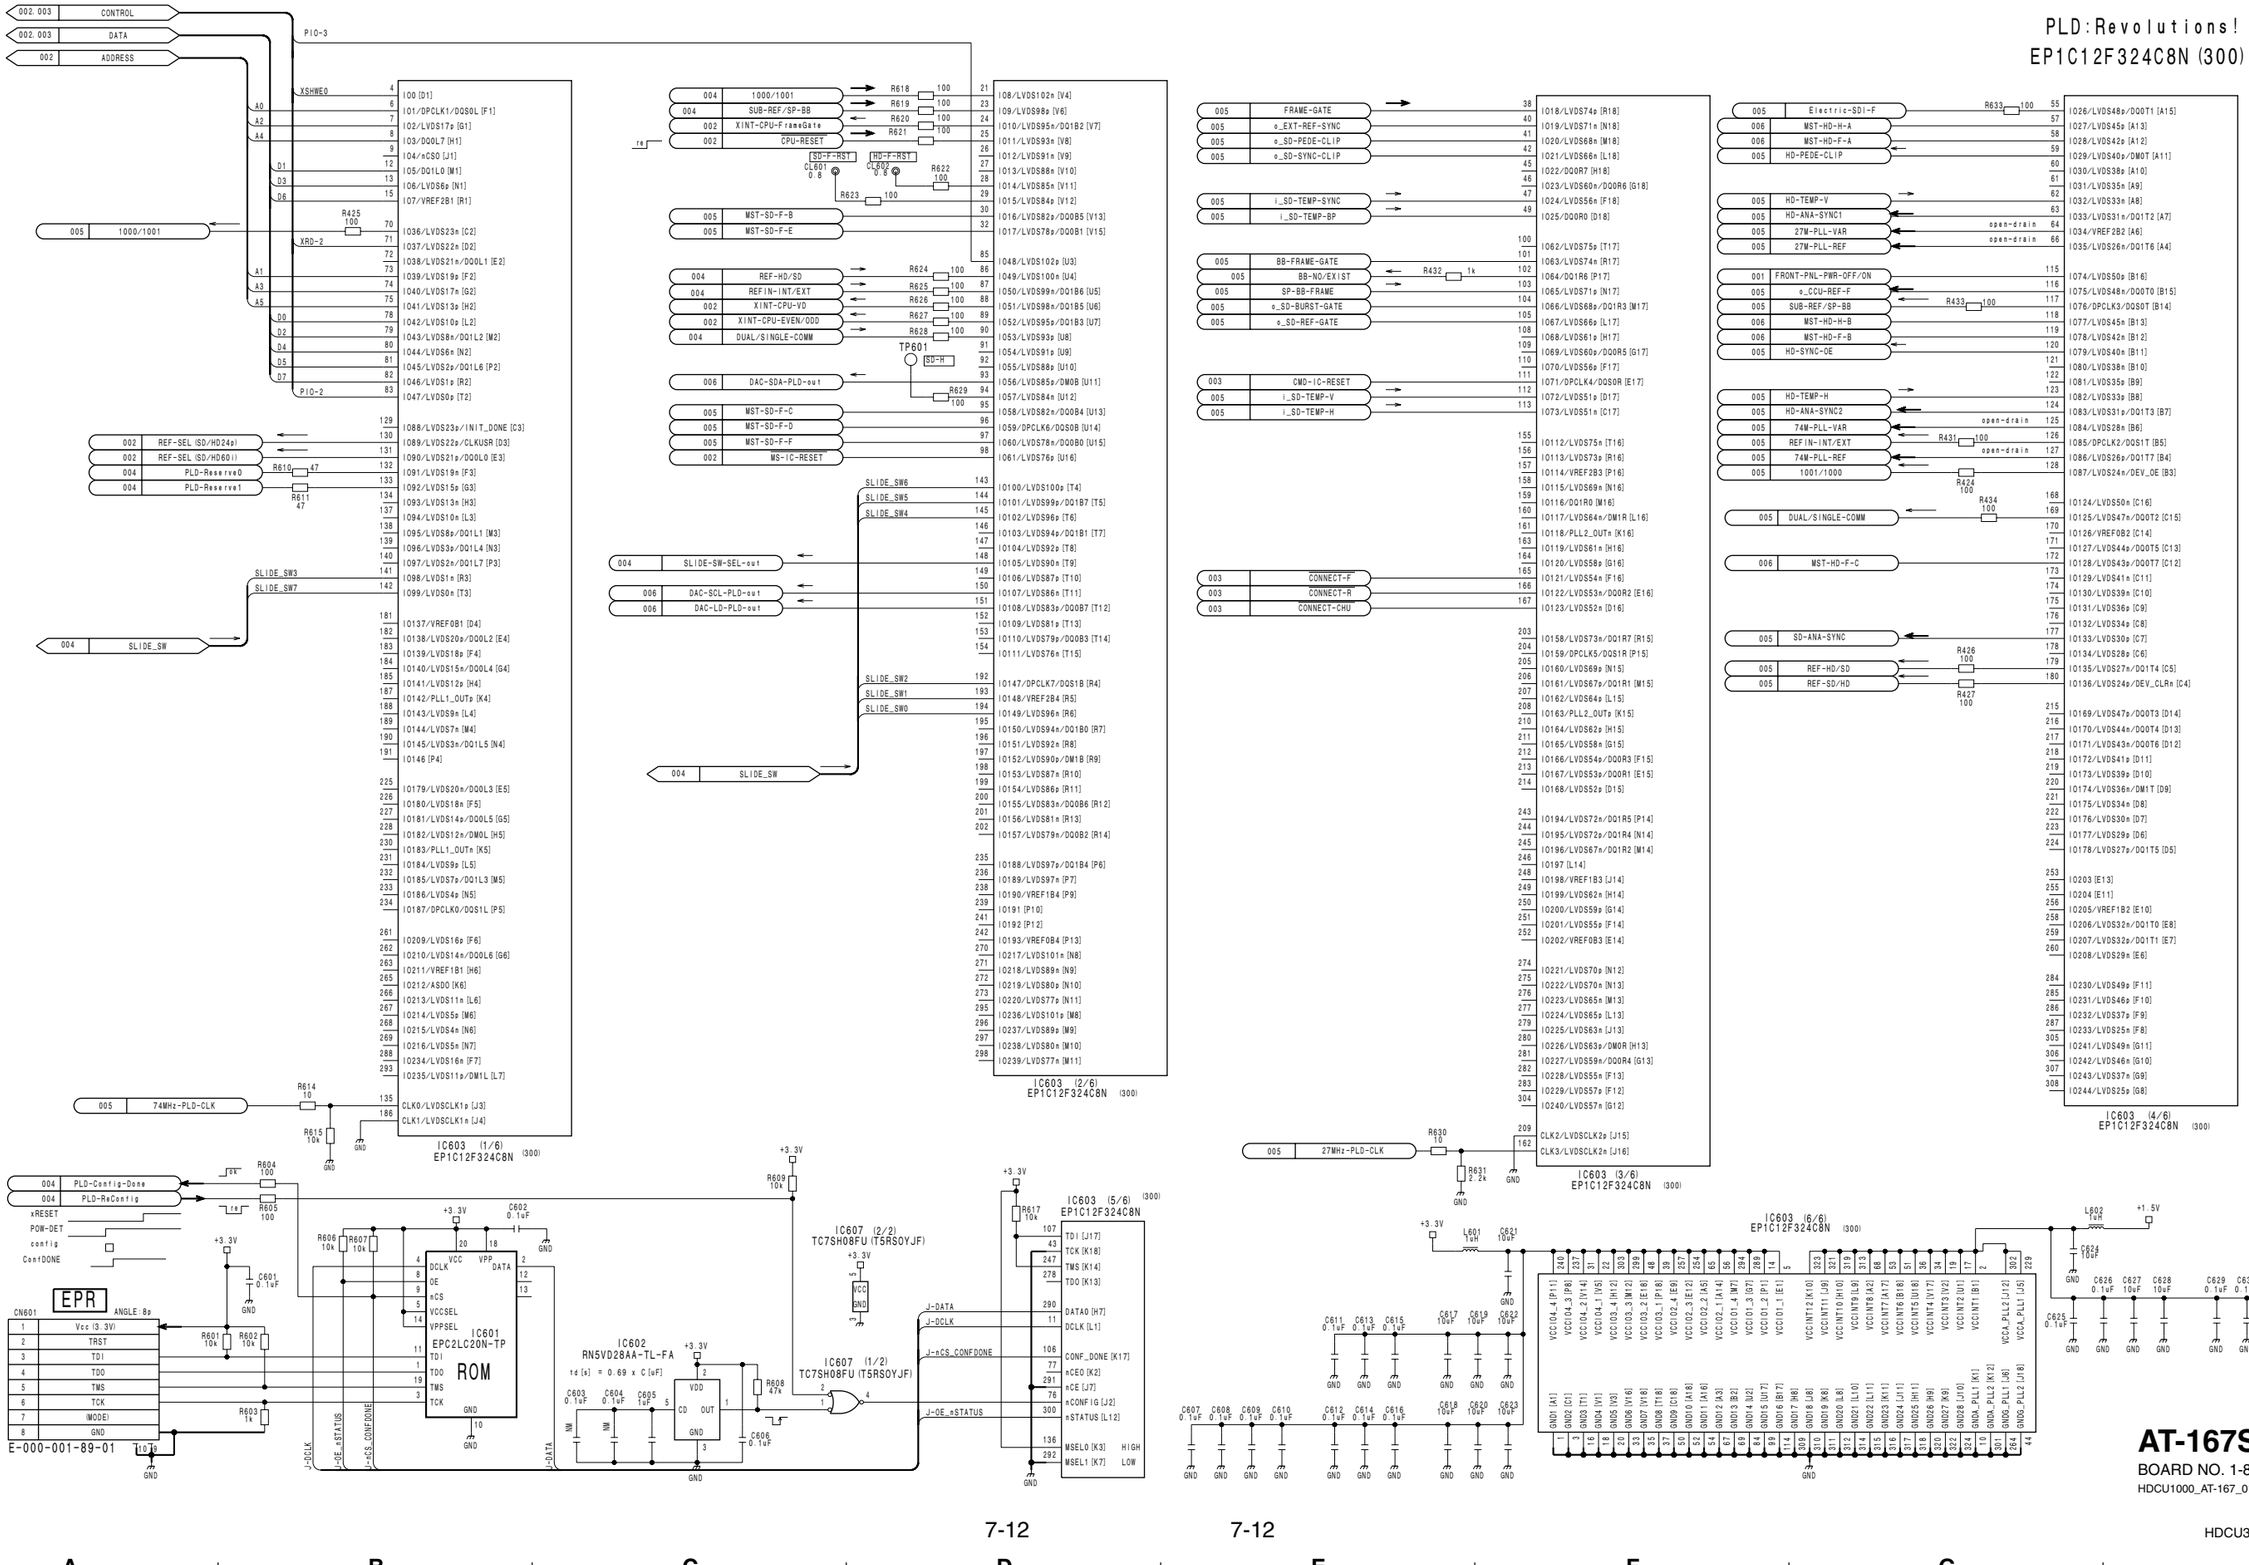


**AT-167S (6/6)**
BOARD NO. 1-867-877-13
HDCU1000_AT-167_013_6



7-12

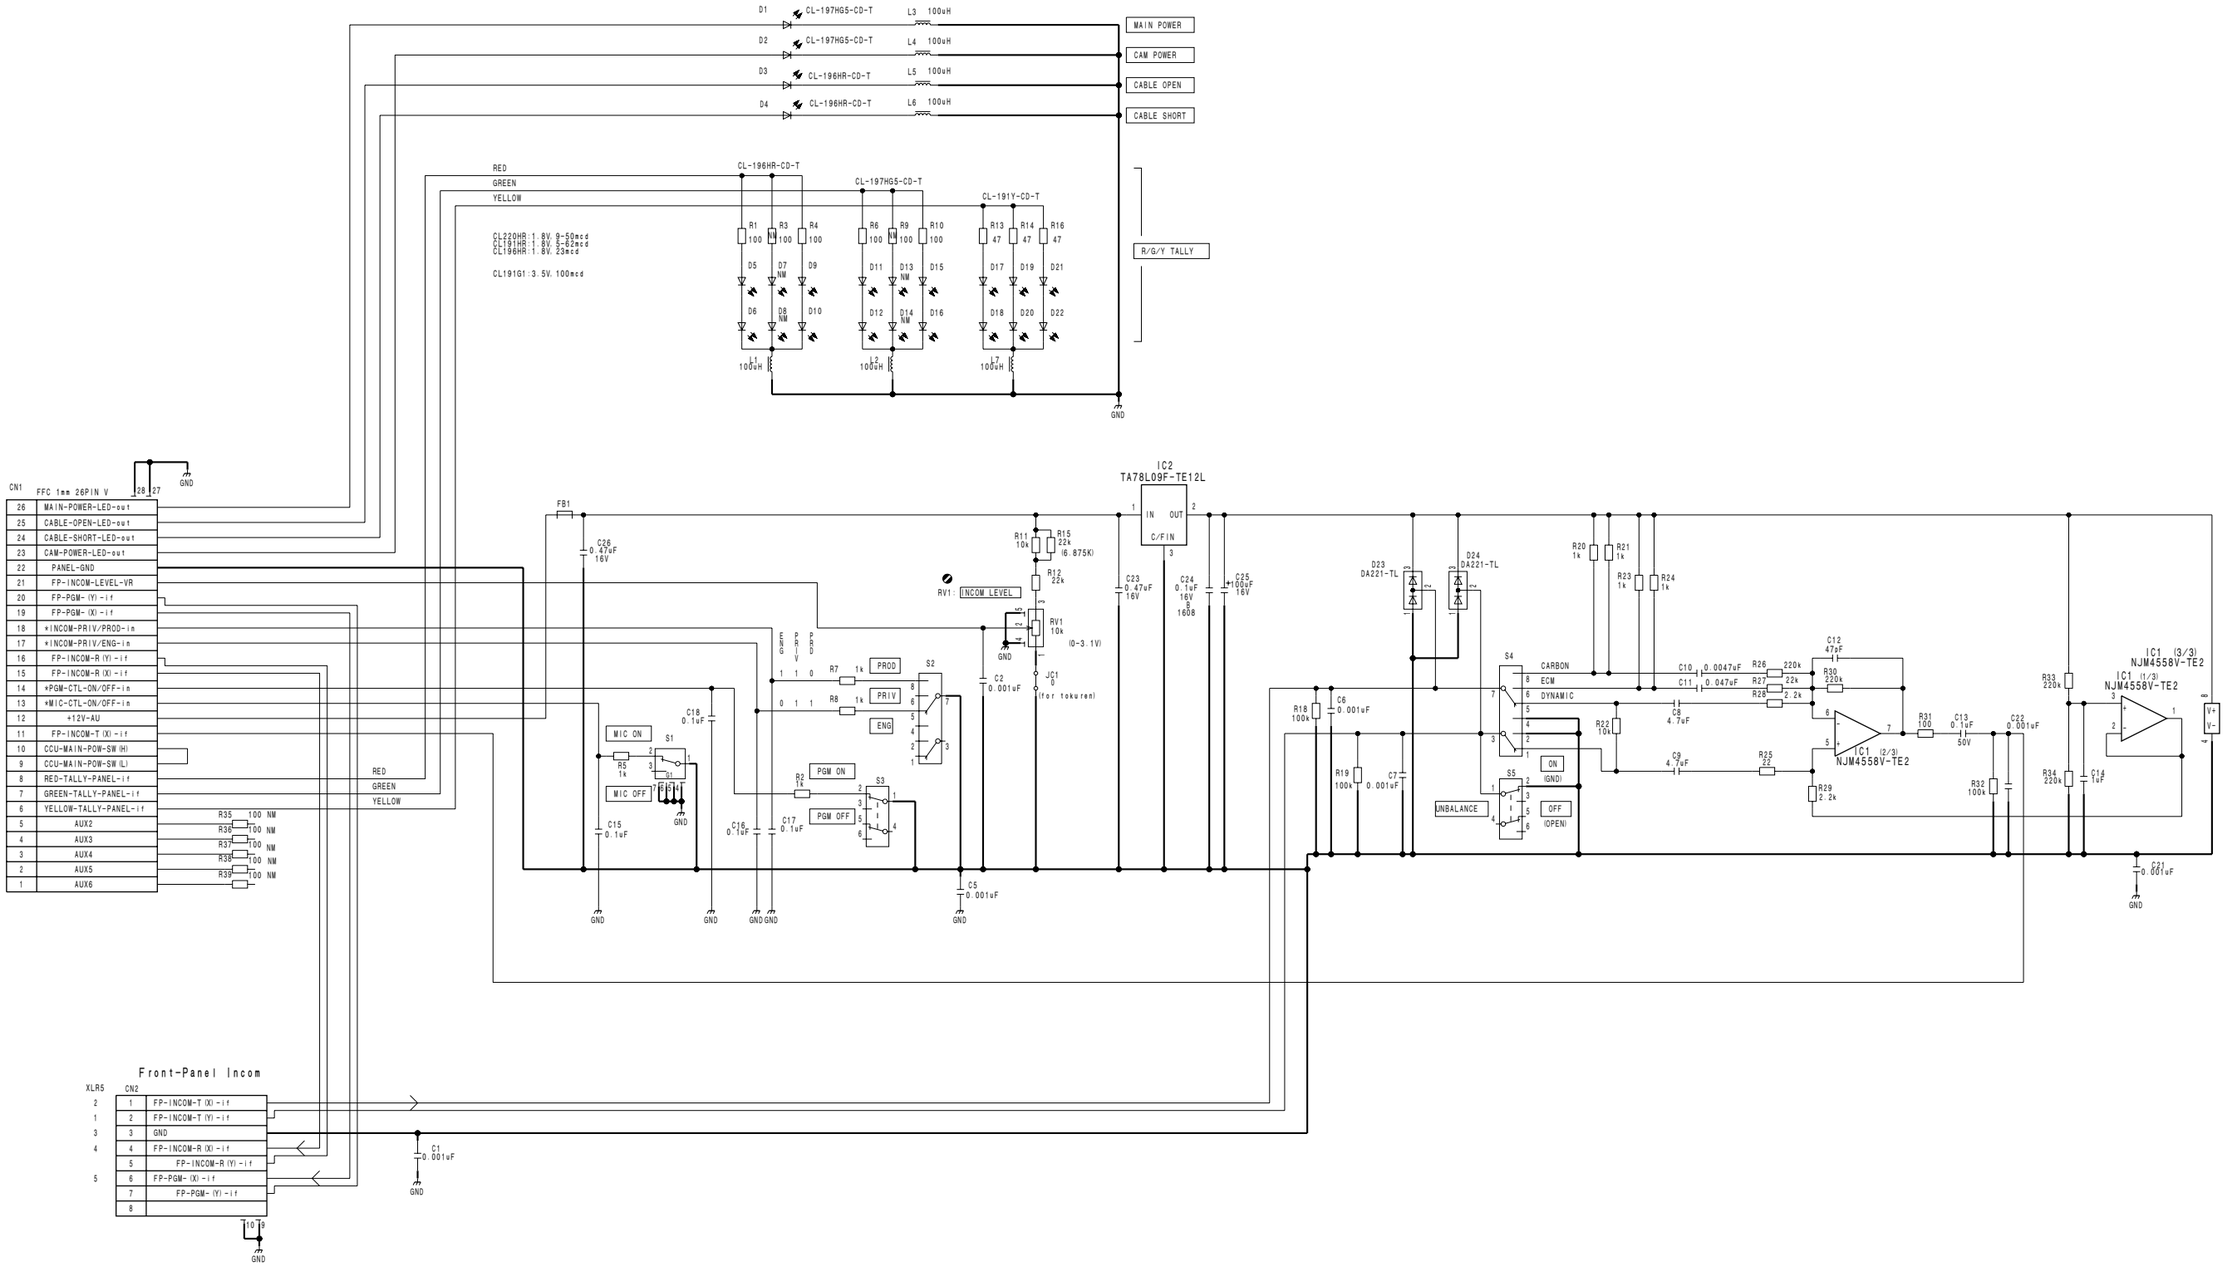


**AU-302**
BOARD NO. 1-867-884-13
HDCU1000_AU-302_013_1

**AVP-6 (1/8)**
**SUFFIX: -12**

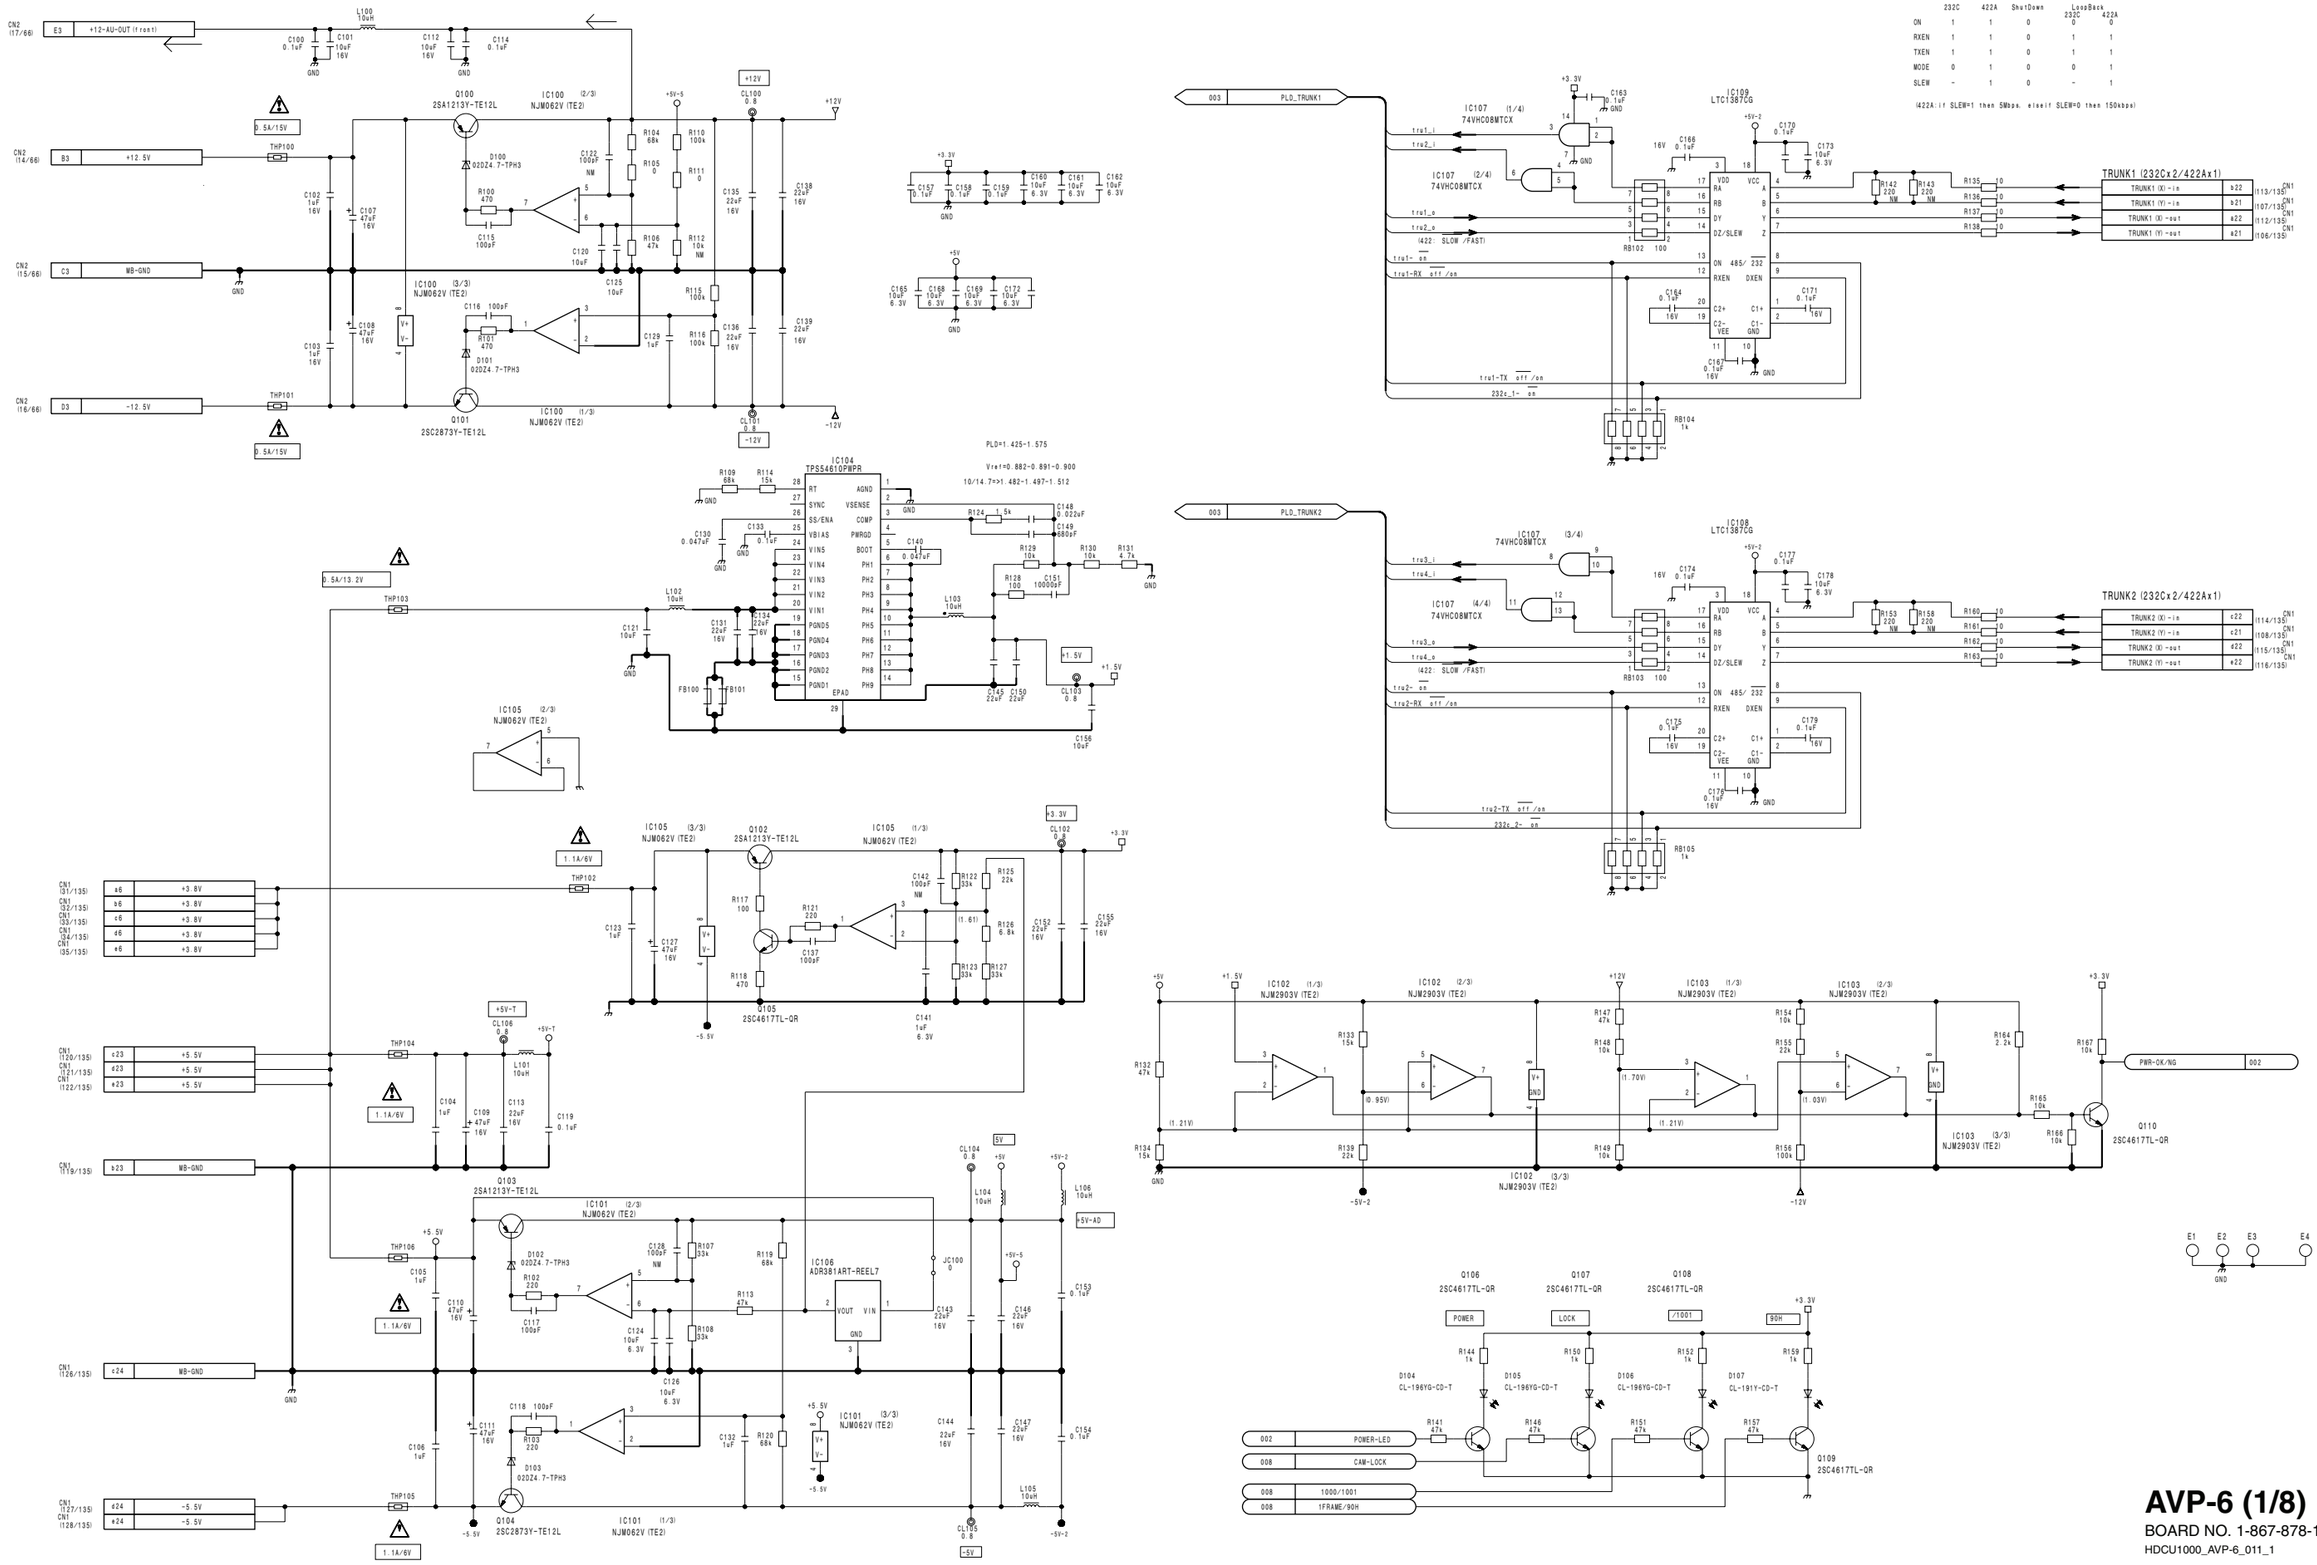




7-14

**AVP-6 (1/8)**
BOARD NO. 1-867-878-12
HDCU1000_AVP-6_011_1

HDCU3300/MM (J,E)

# AVP-6 (2/8)
SUFFIX: -12

AVP-6 (2/8)
SUFFIX: -12

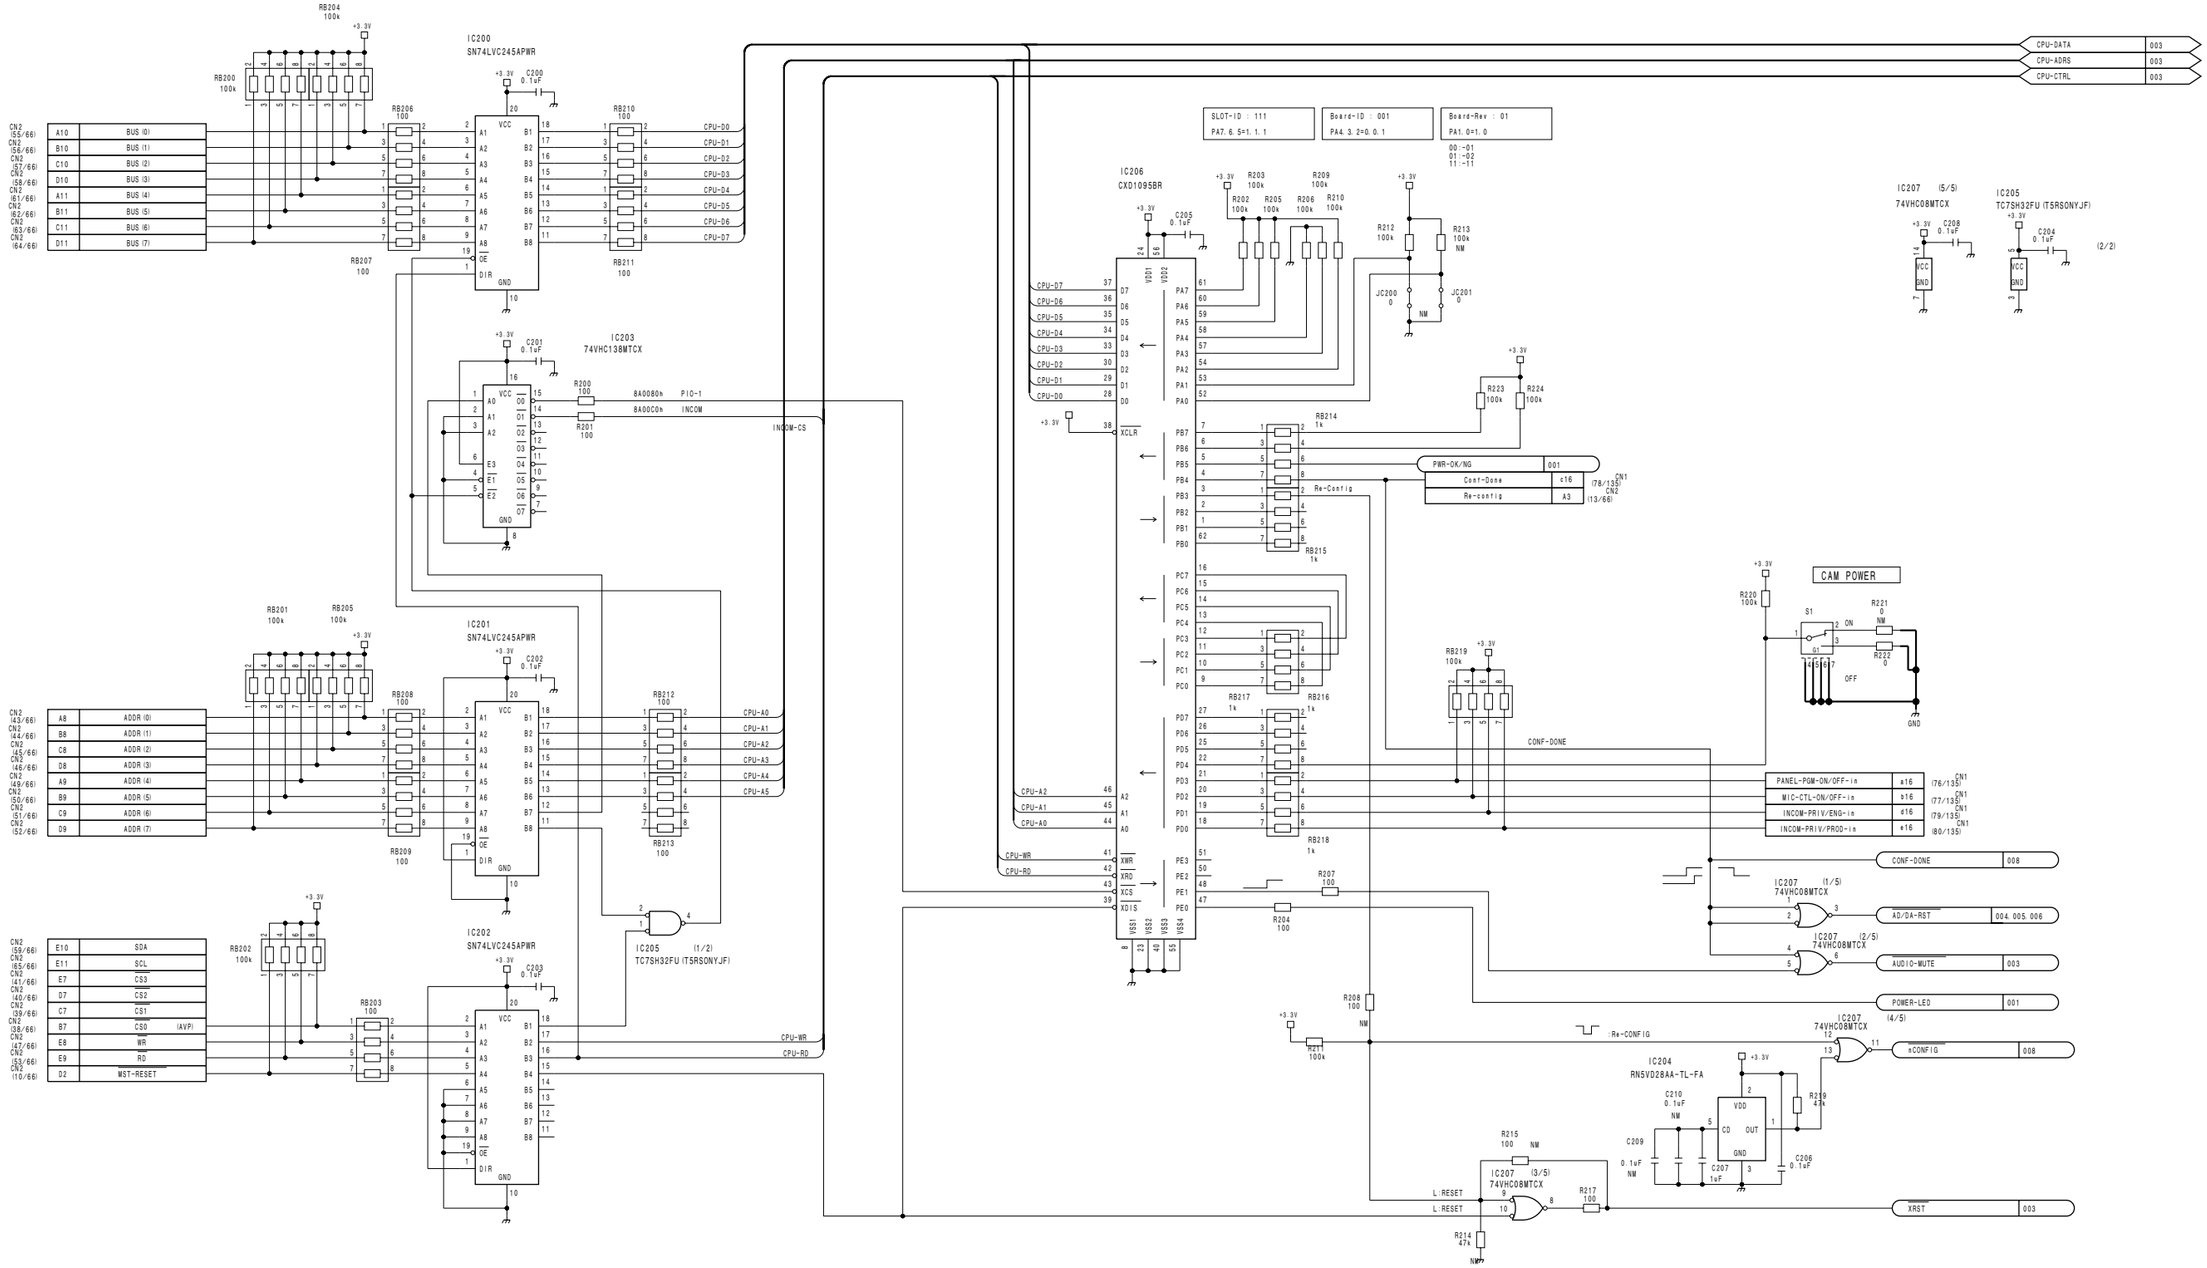


# AVP-6 (2/8)
BOARD NO. 1-867-878-12
HDCU1000_AVP-6_011_2

**AVP-6 (3/8)**
**SUFFIX: -12**


7-16

# AVP-6 (3/8)

BOARD NO. 1-867-878-12

HDCU1000_AVP-6_011_3

HDCU3300/MM (J,E)

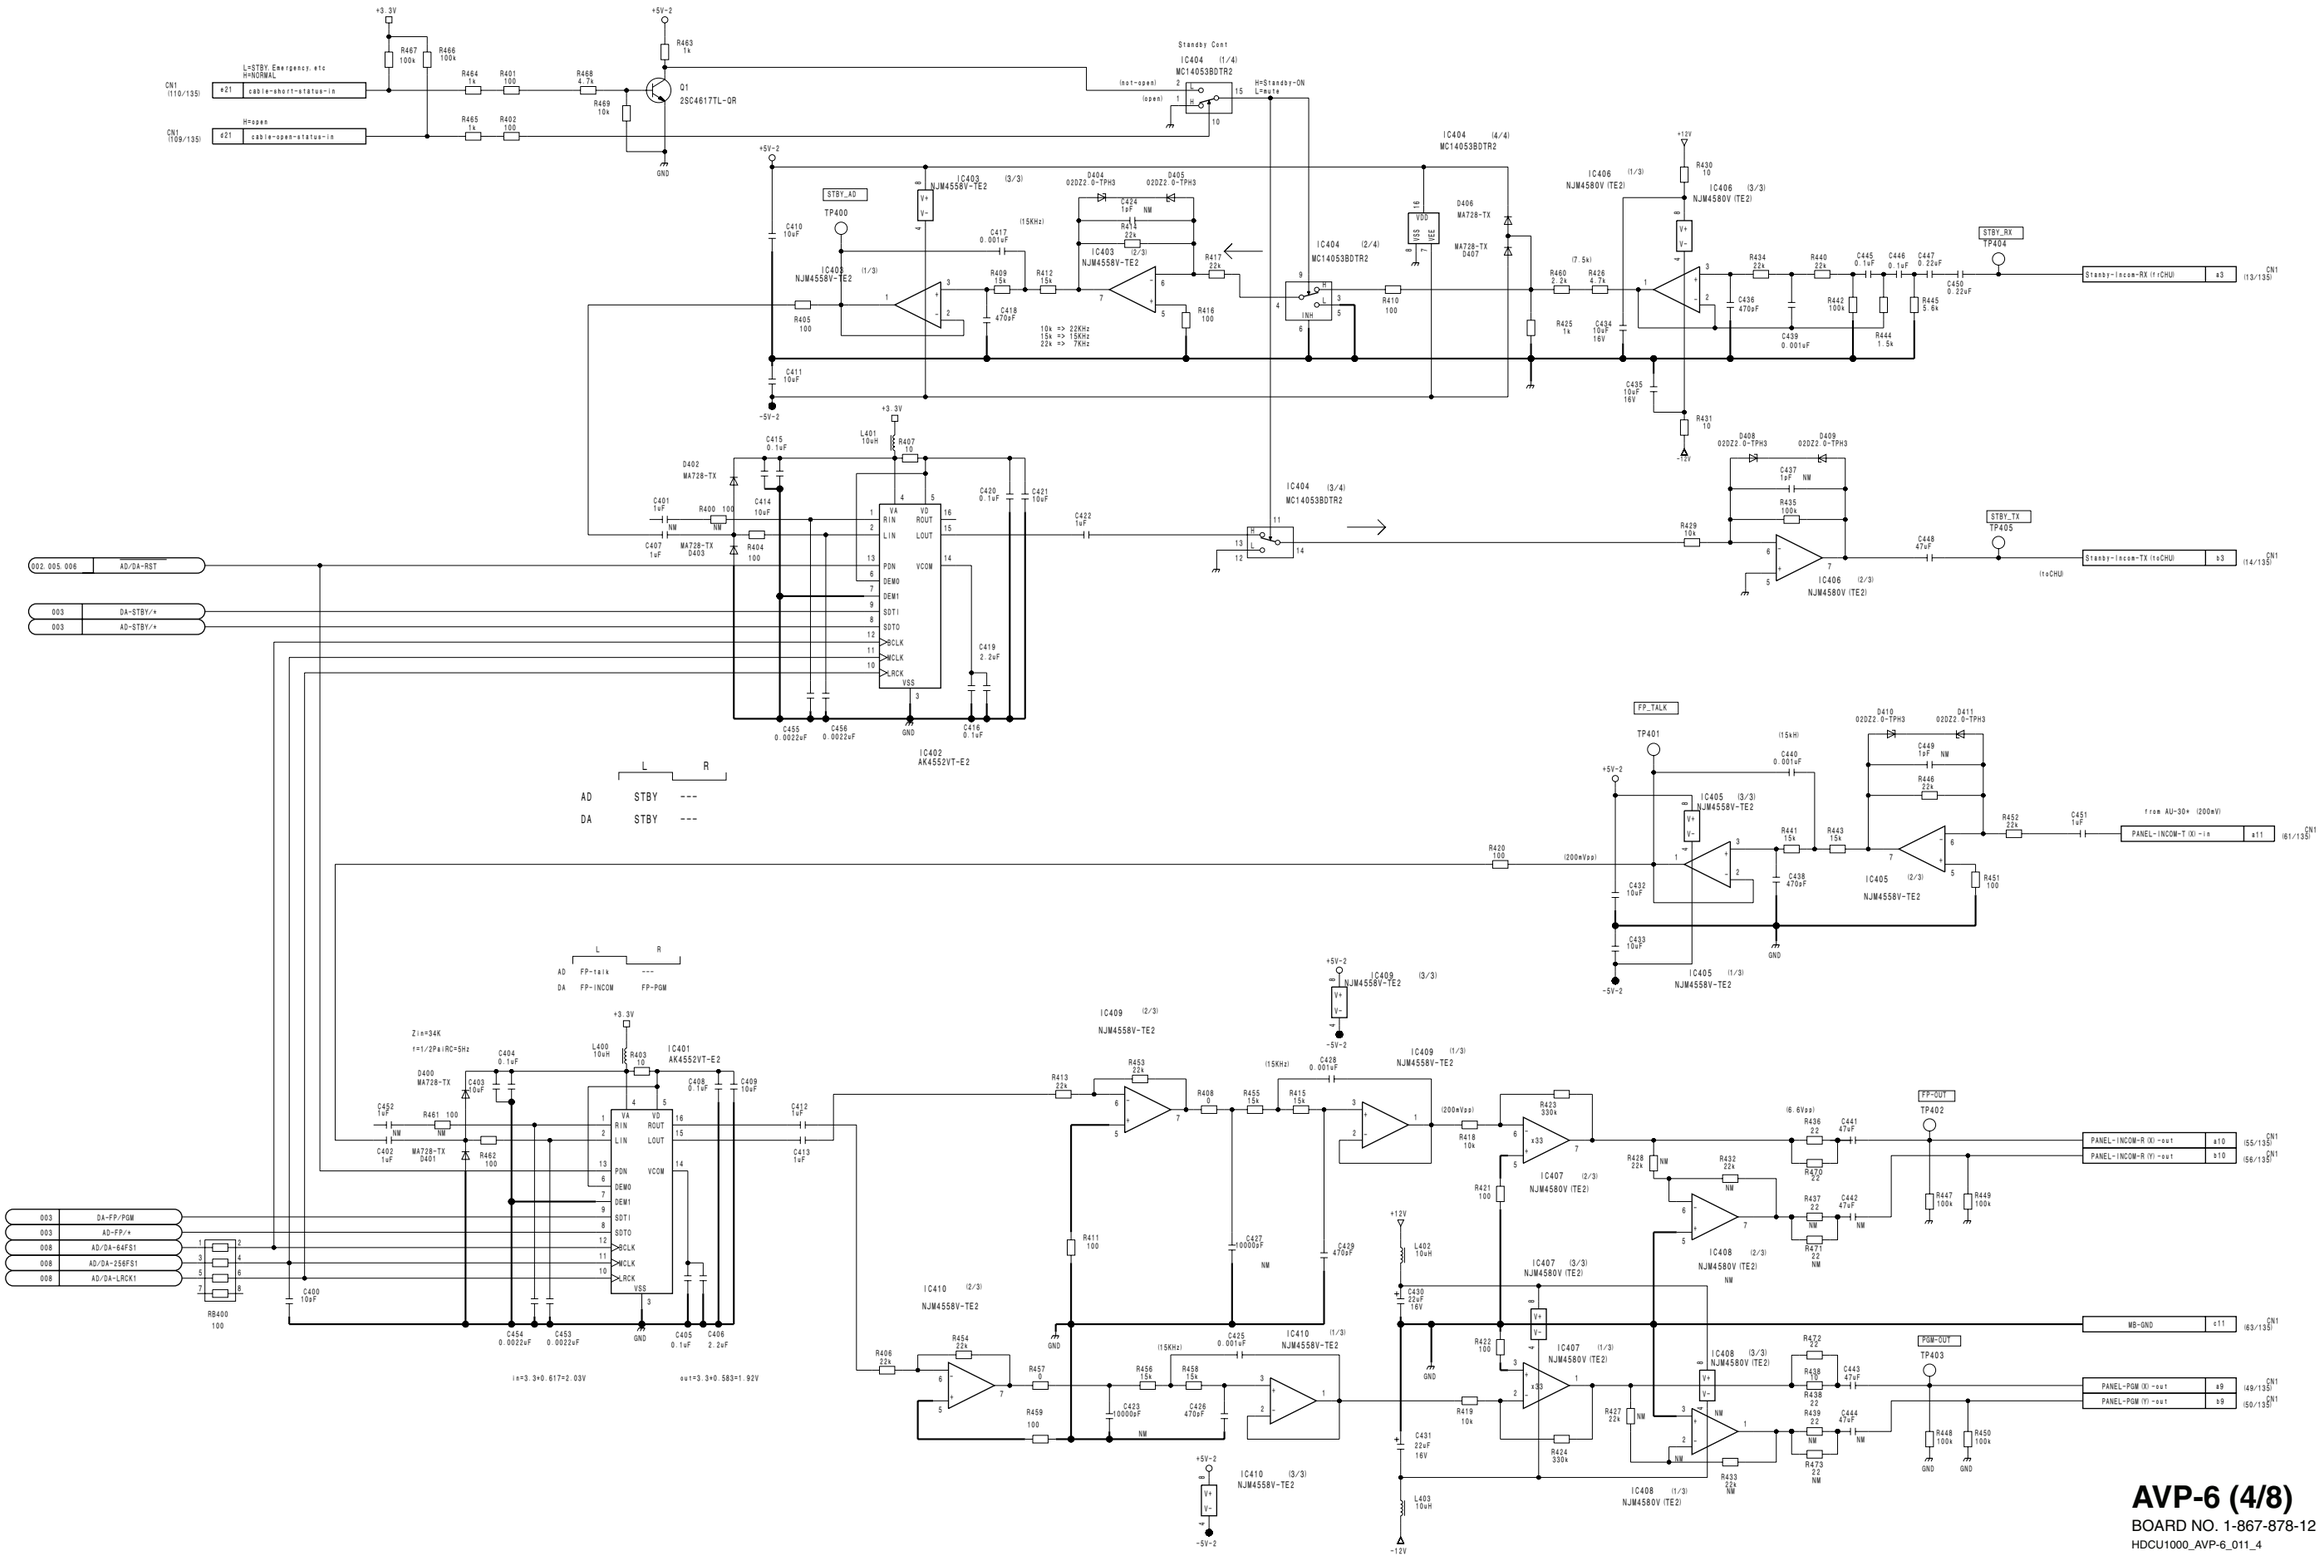


**AVP-6 (4/8)**
BOARD NO. 1-867-878-12
HDCU1000_AVP-6_011_4

**AVP-6 (5/8)**
**SUFFIX: -12**

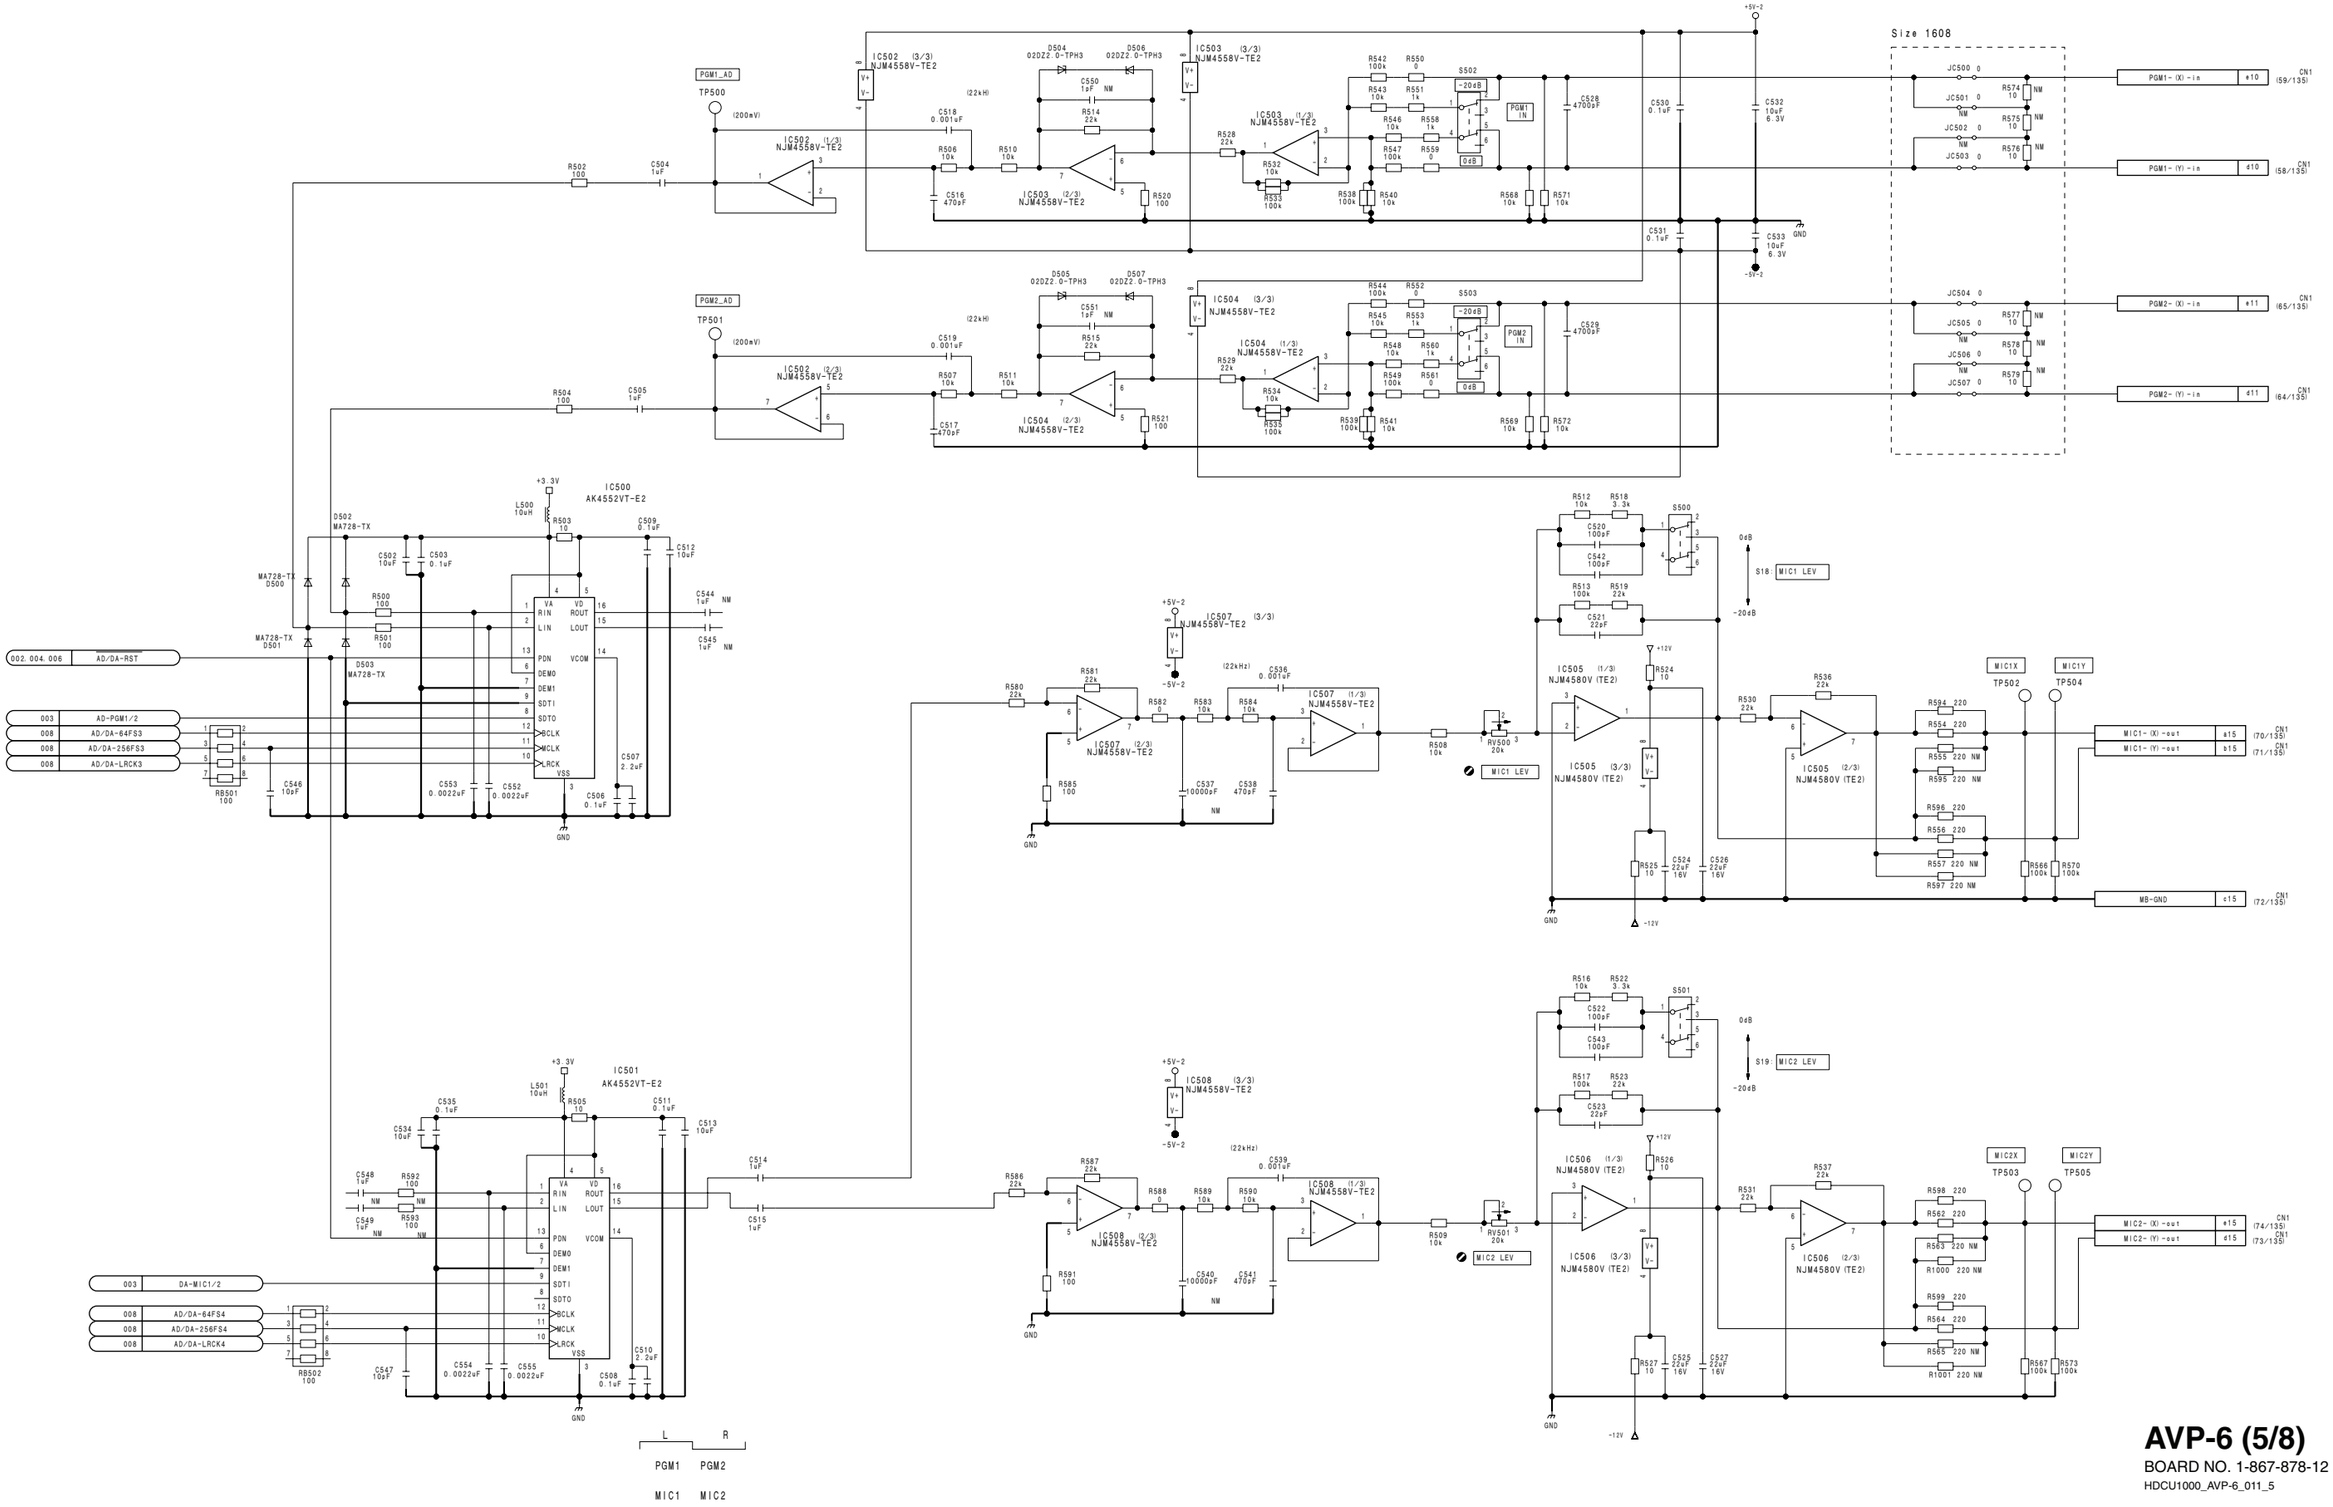



7-18

**AVP-6 (5/8)**
BOARD NO. 1-867-878-12
HDCU1000_AVP-6_011_5

HDCU3300/MM (J,E)

# AVP-6 (6/8)
**SUFFIX: -12**

AVP-6 (6/8)
SUFFIX: -12

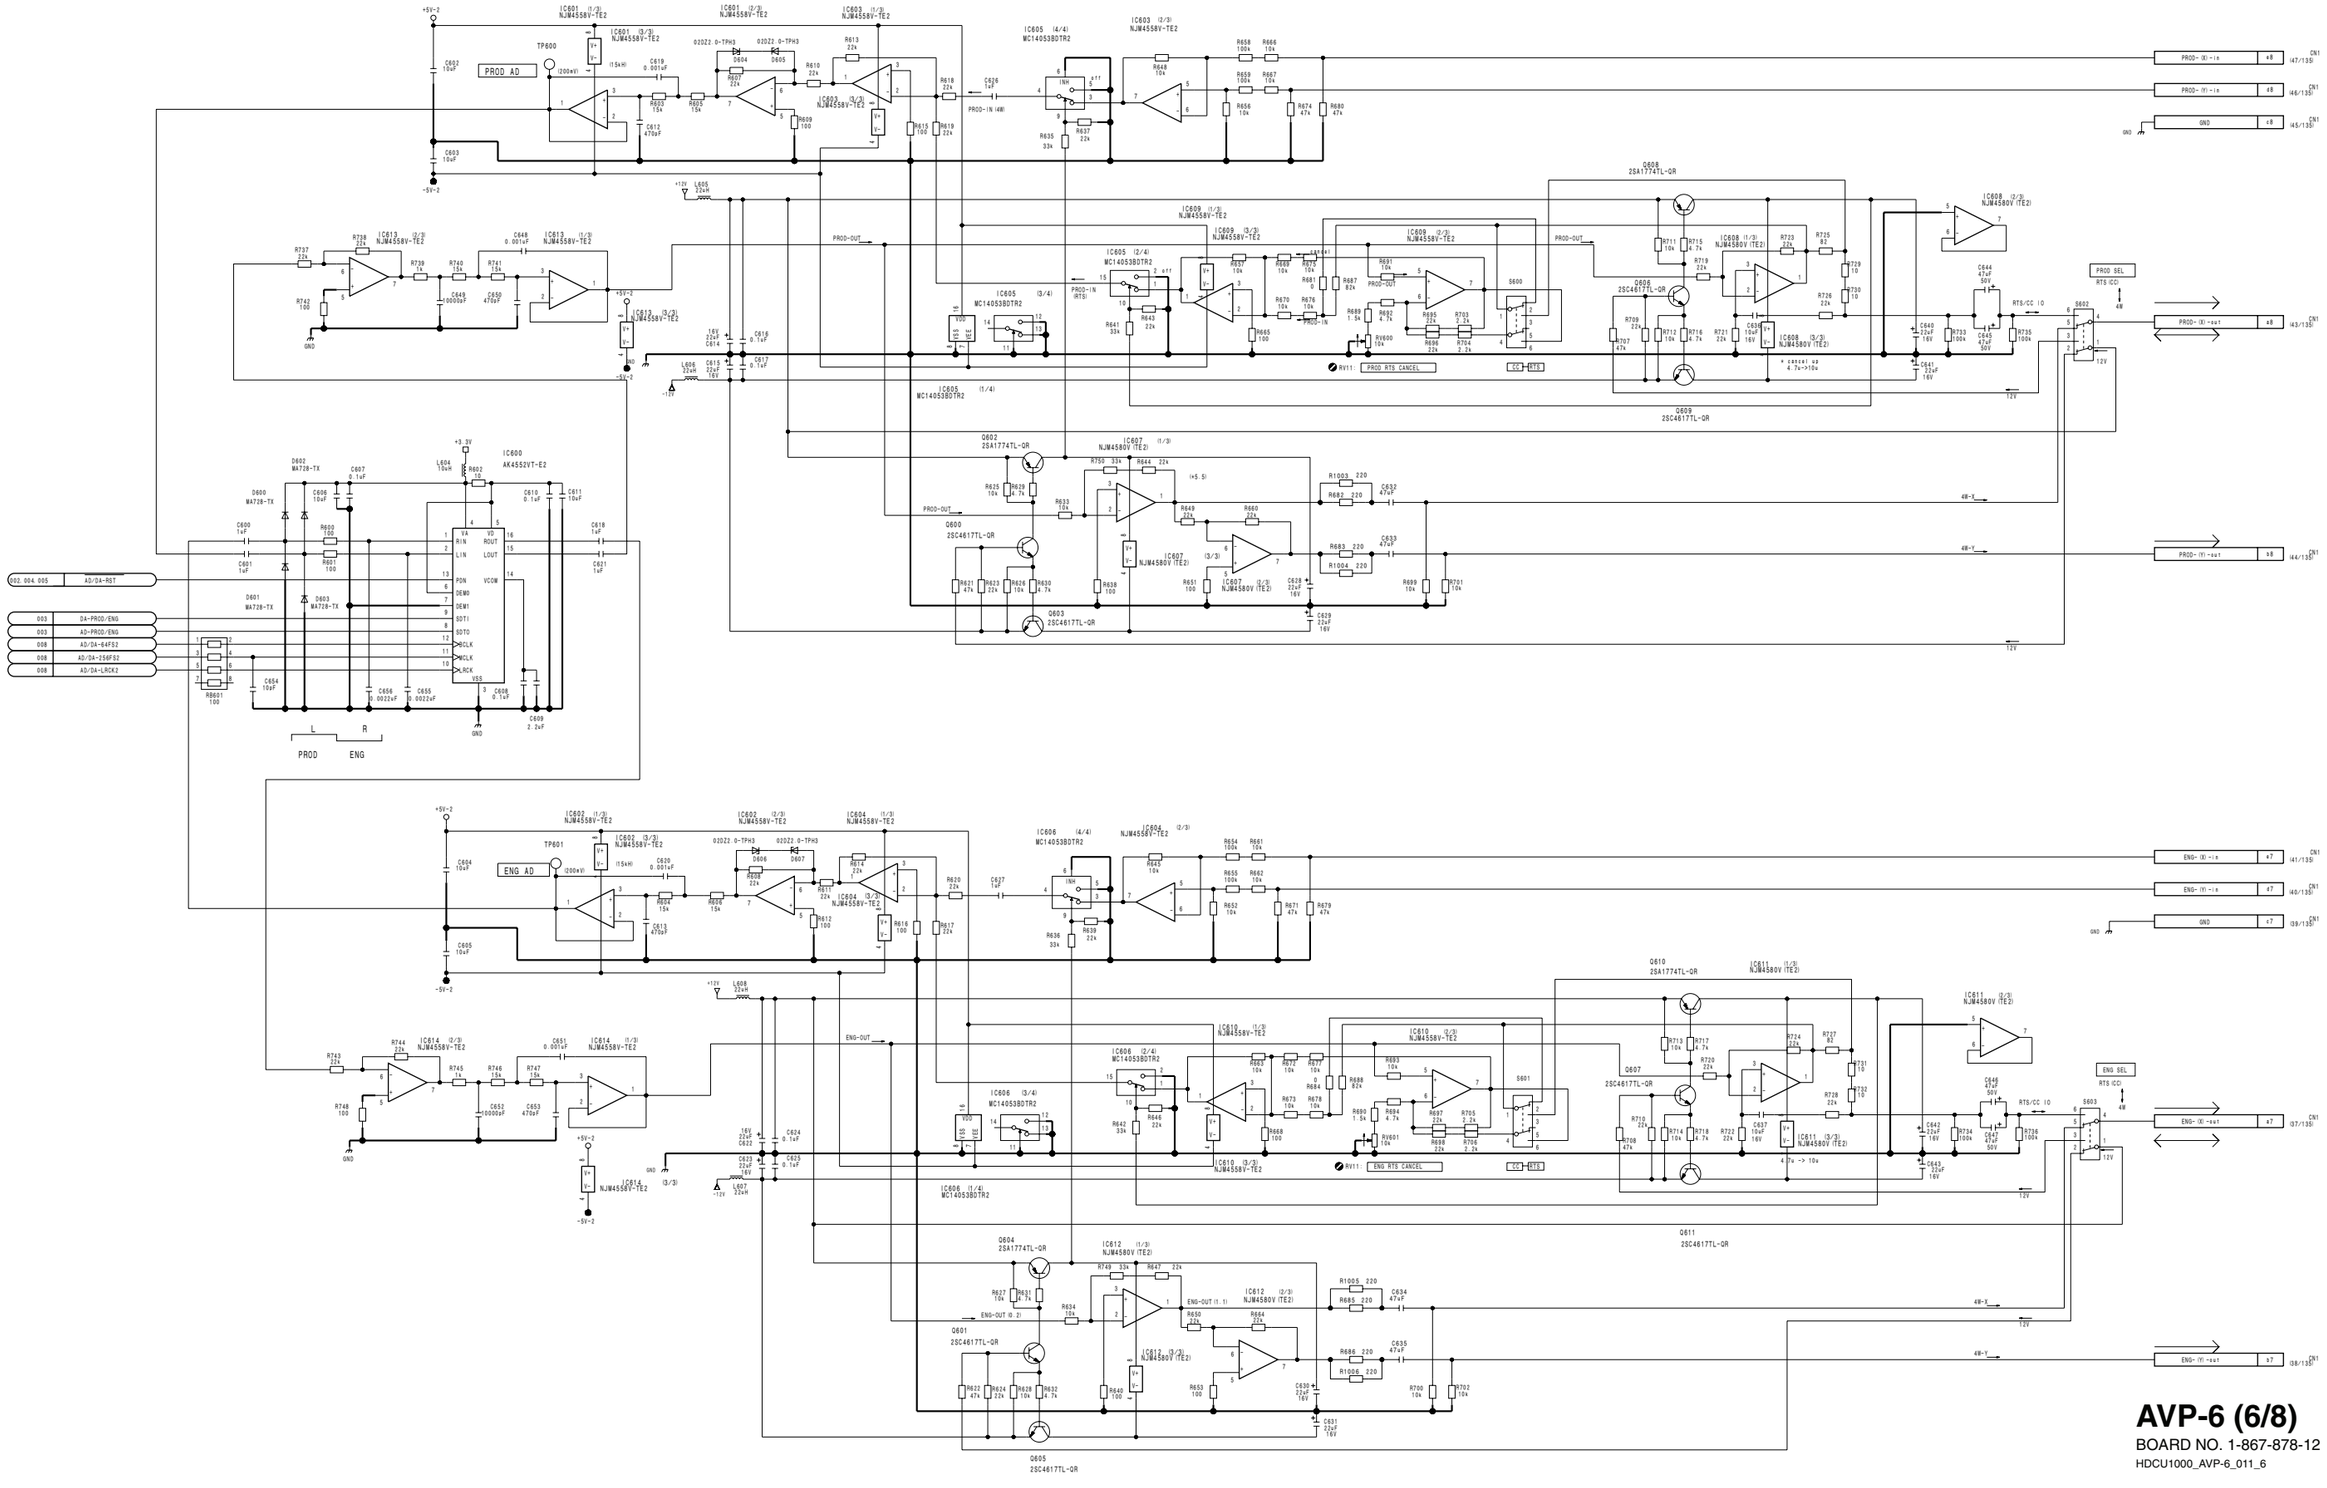


# AVP-6 (6/8)
BOARD NO. 1-867-878-12
HDCU1000_AVP-6_011_6

**AVP-6 (7/8)**
**SUFFIX: -12**

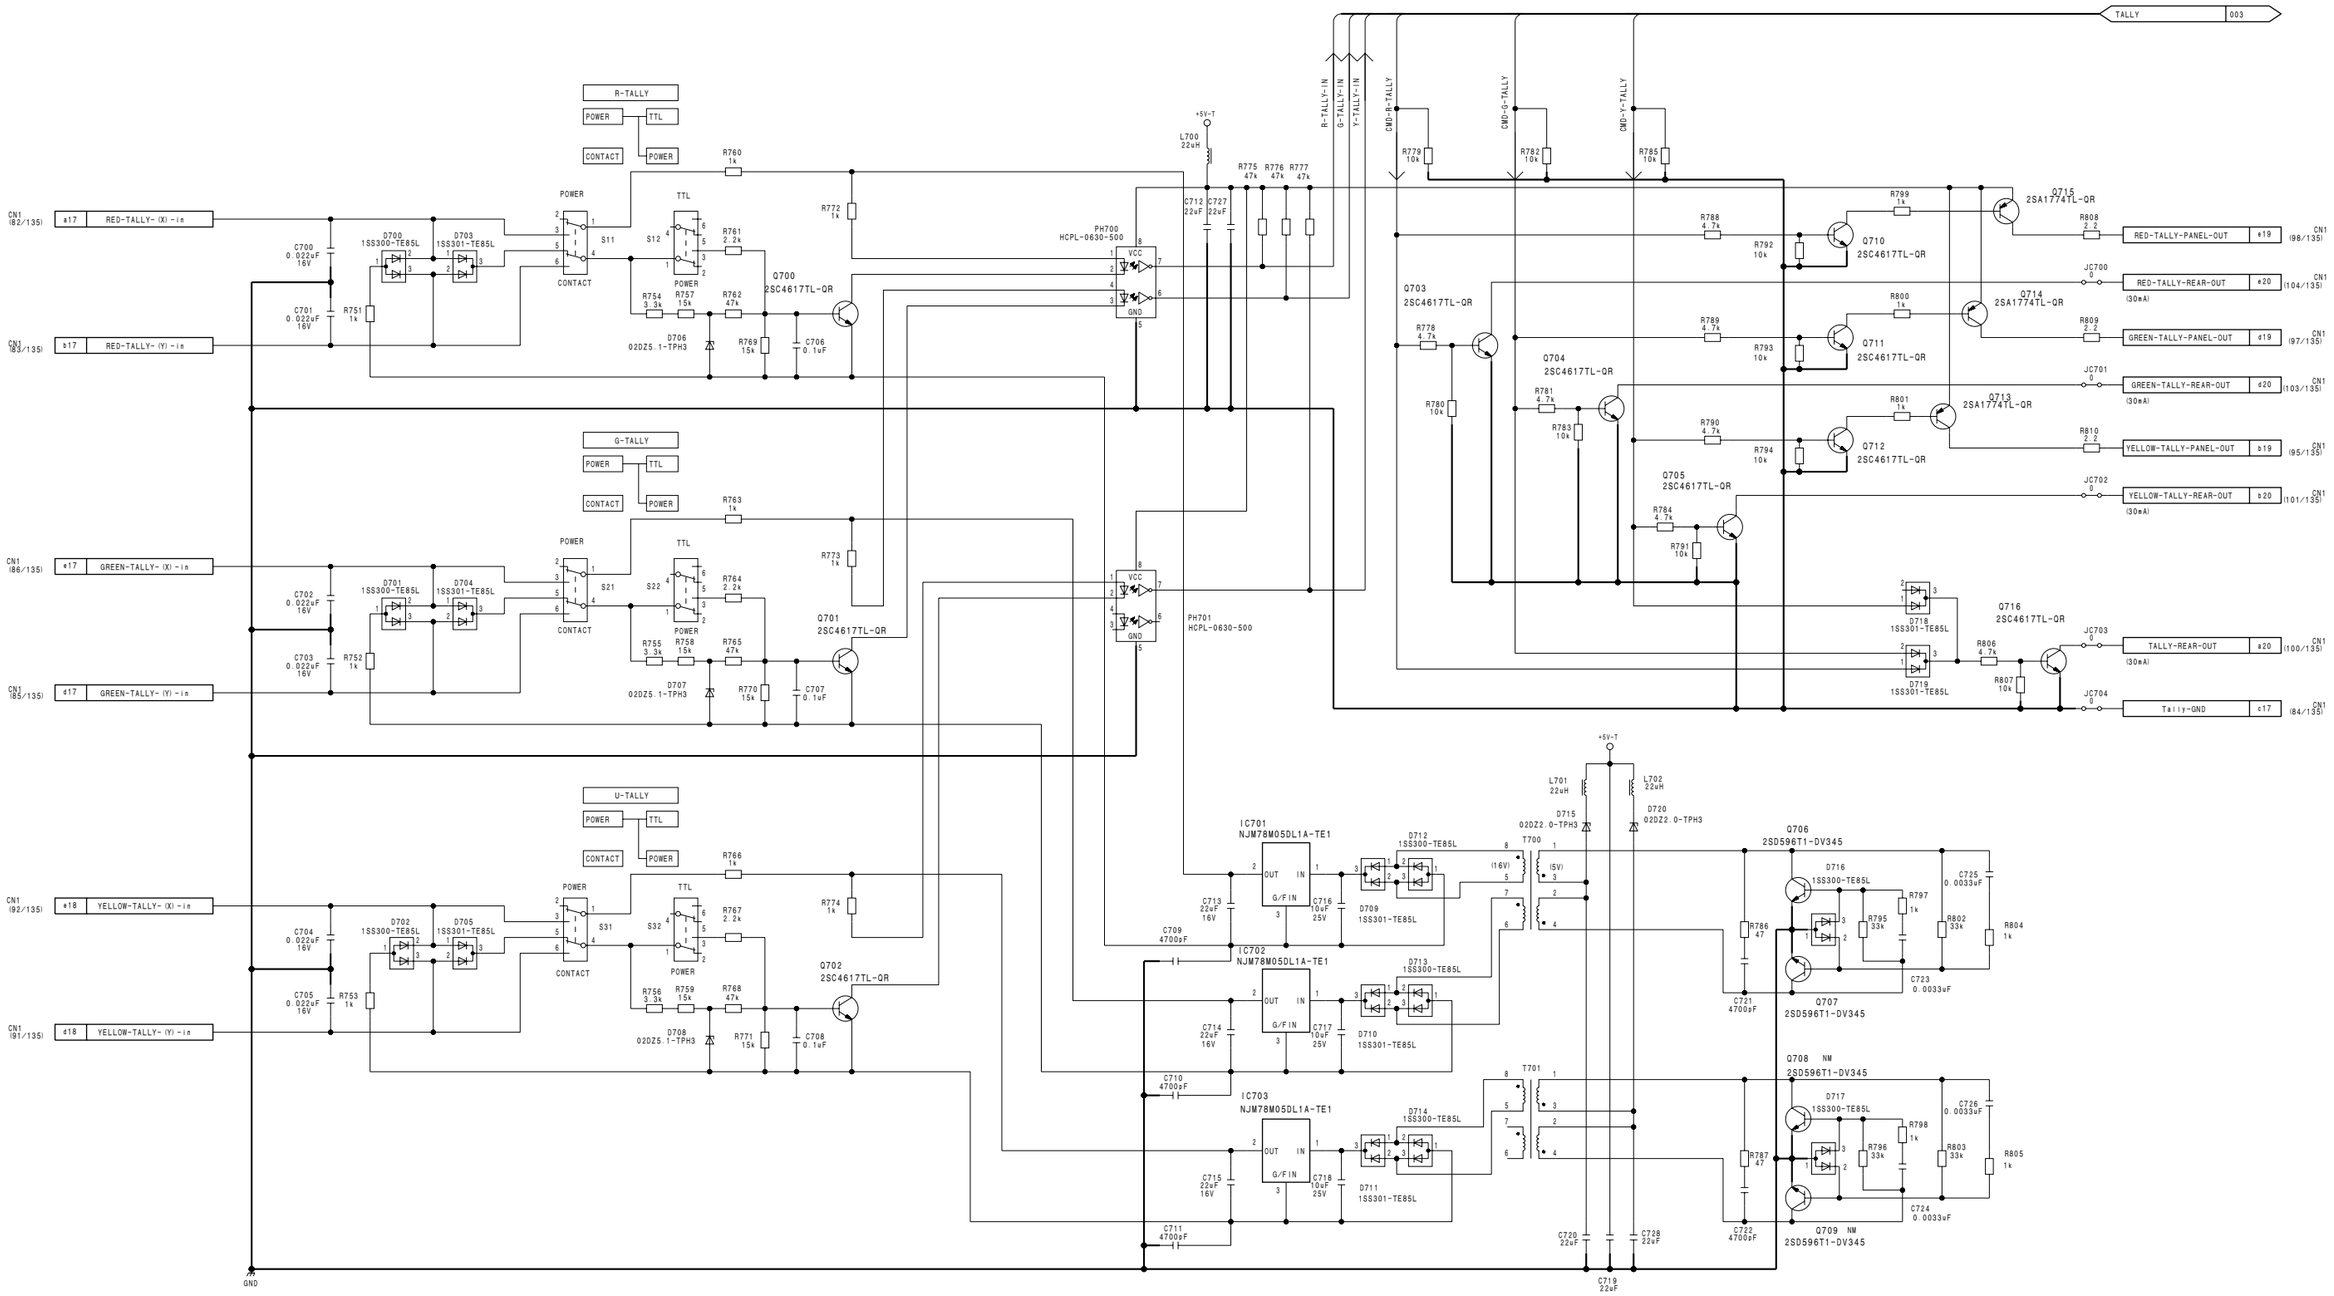


**AVP-6 (7/8)**
BOARD NO. 1-867-878-12
HDCU1000_AVP-6_011_7

# AVP-6 (8/8)
**SUFFIX: -12**


# AVP-6 (8/8)
**SUFFIX: -12**


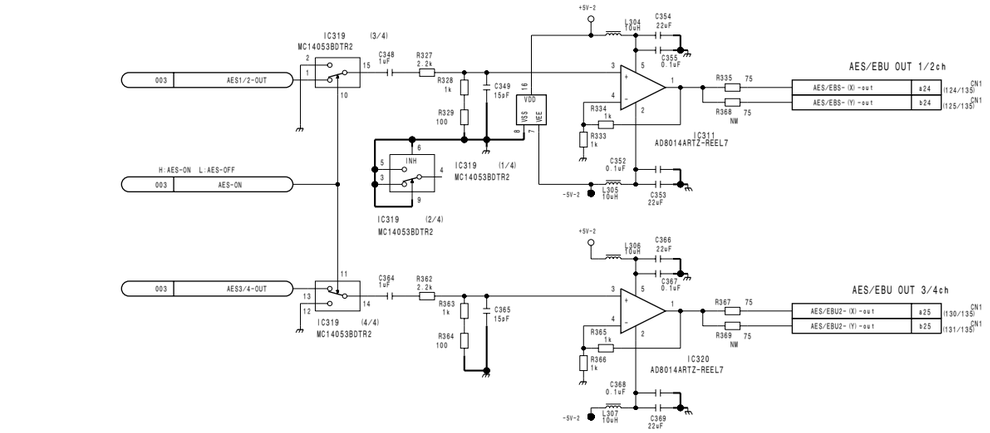


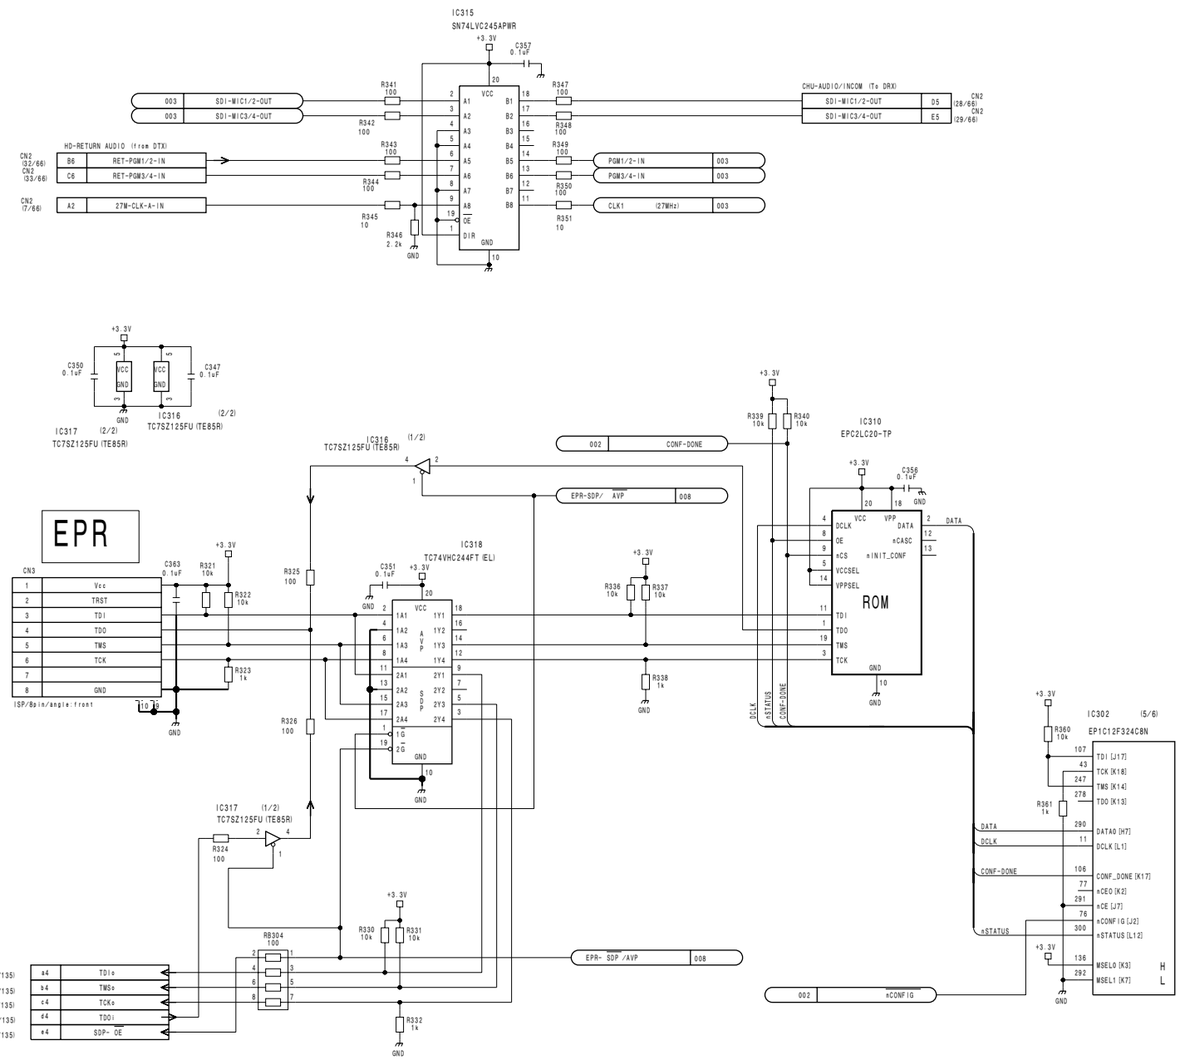


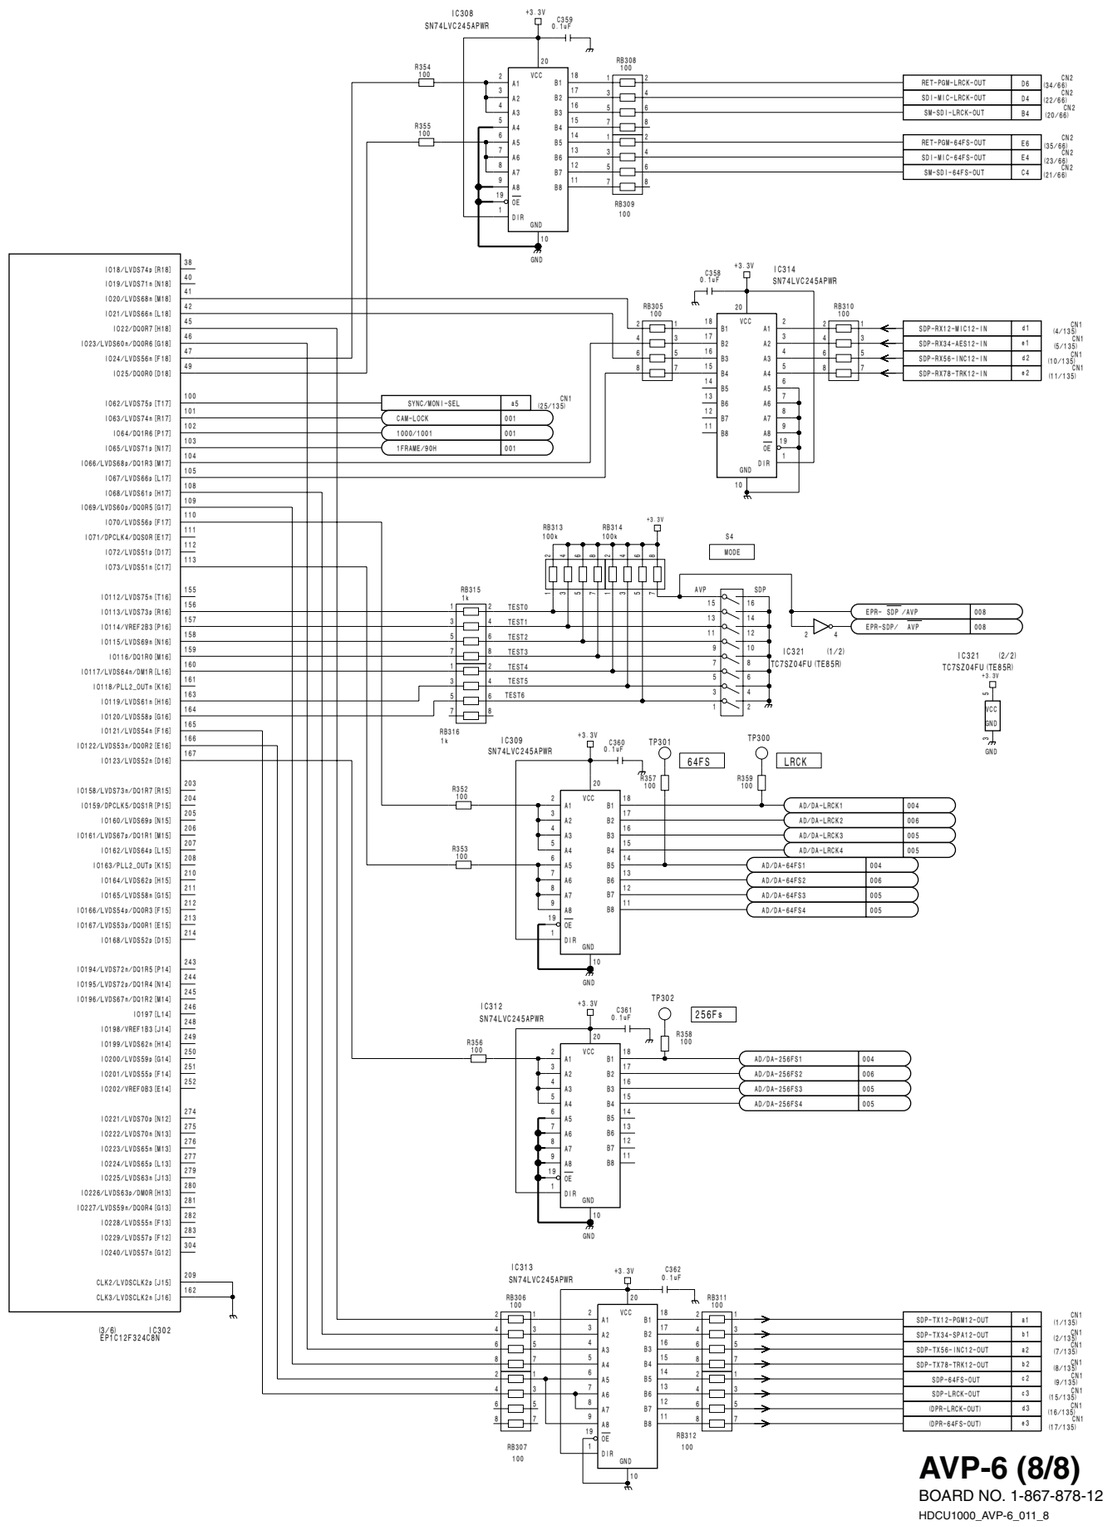


**AVP-6 (8/8)**
BOARD NO. 1-867-878-12
HDCU1000_AVP-6_011_8

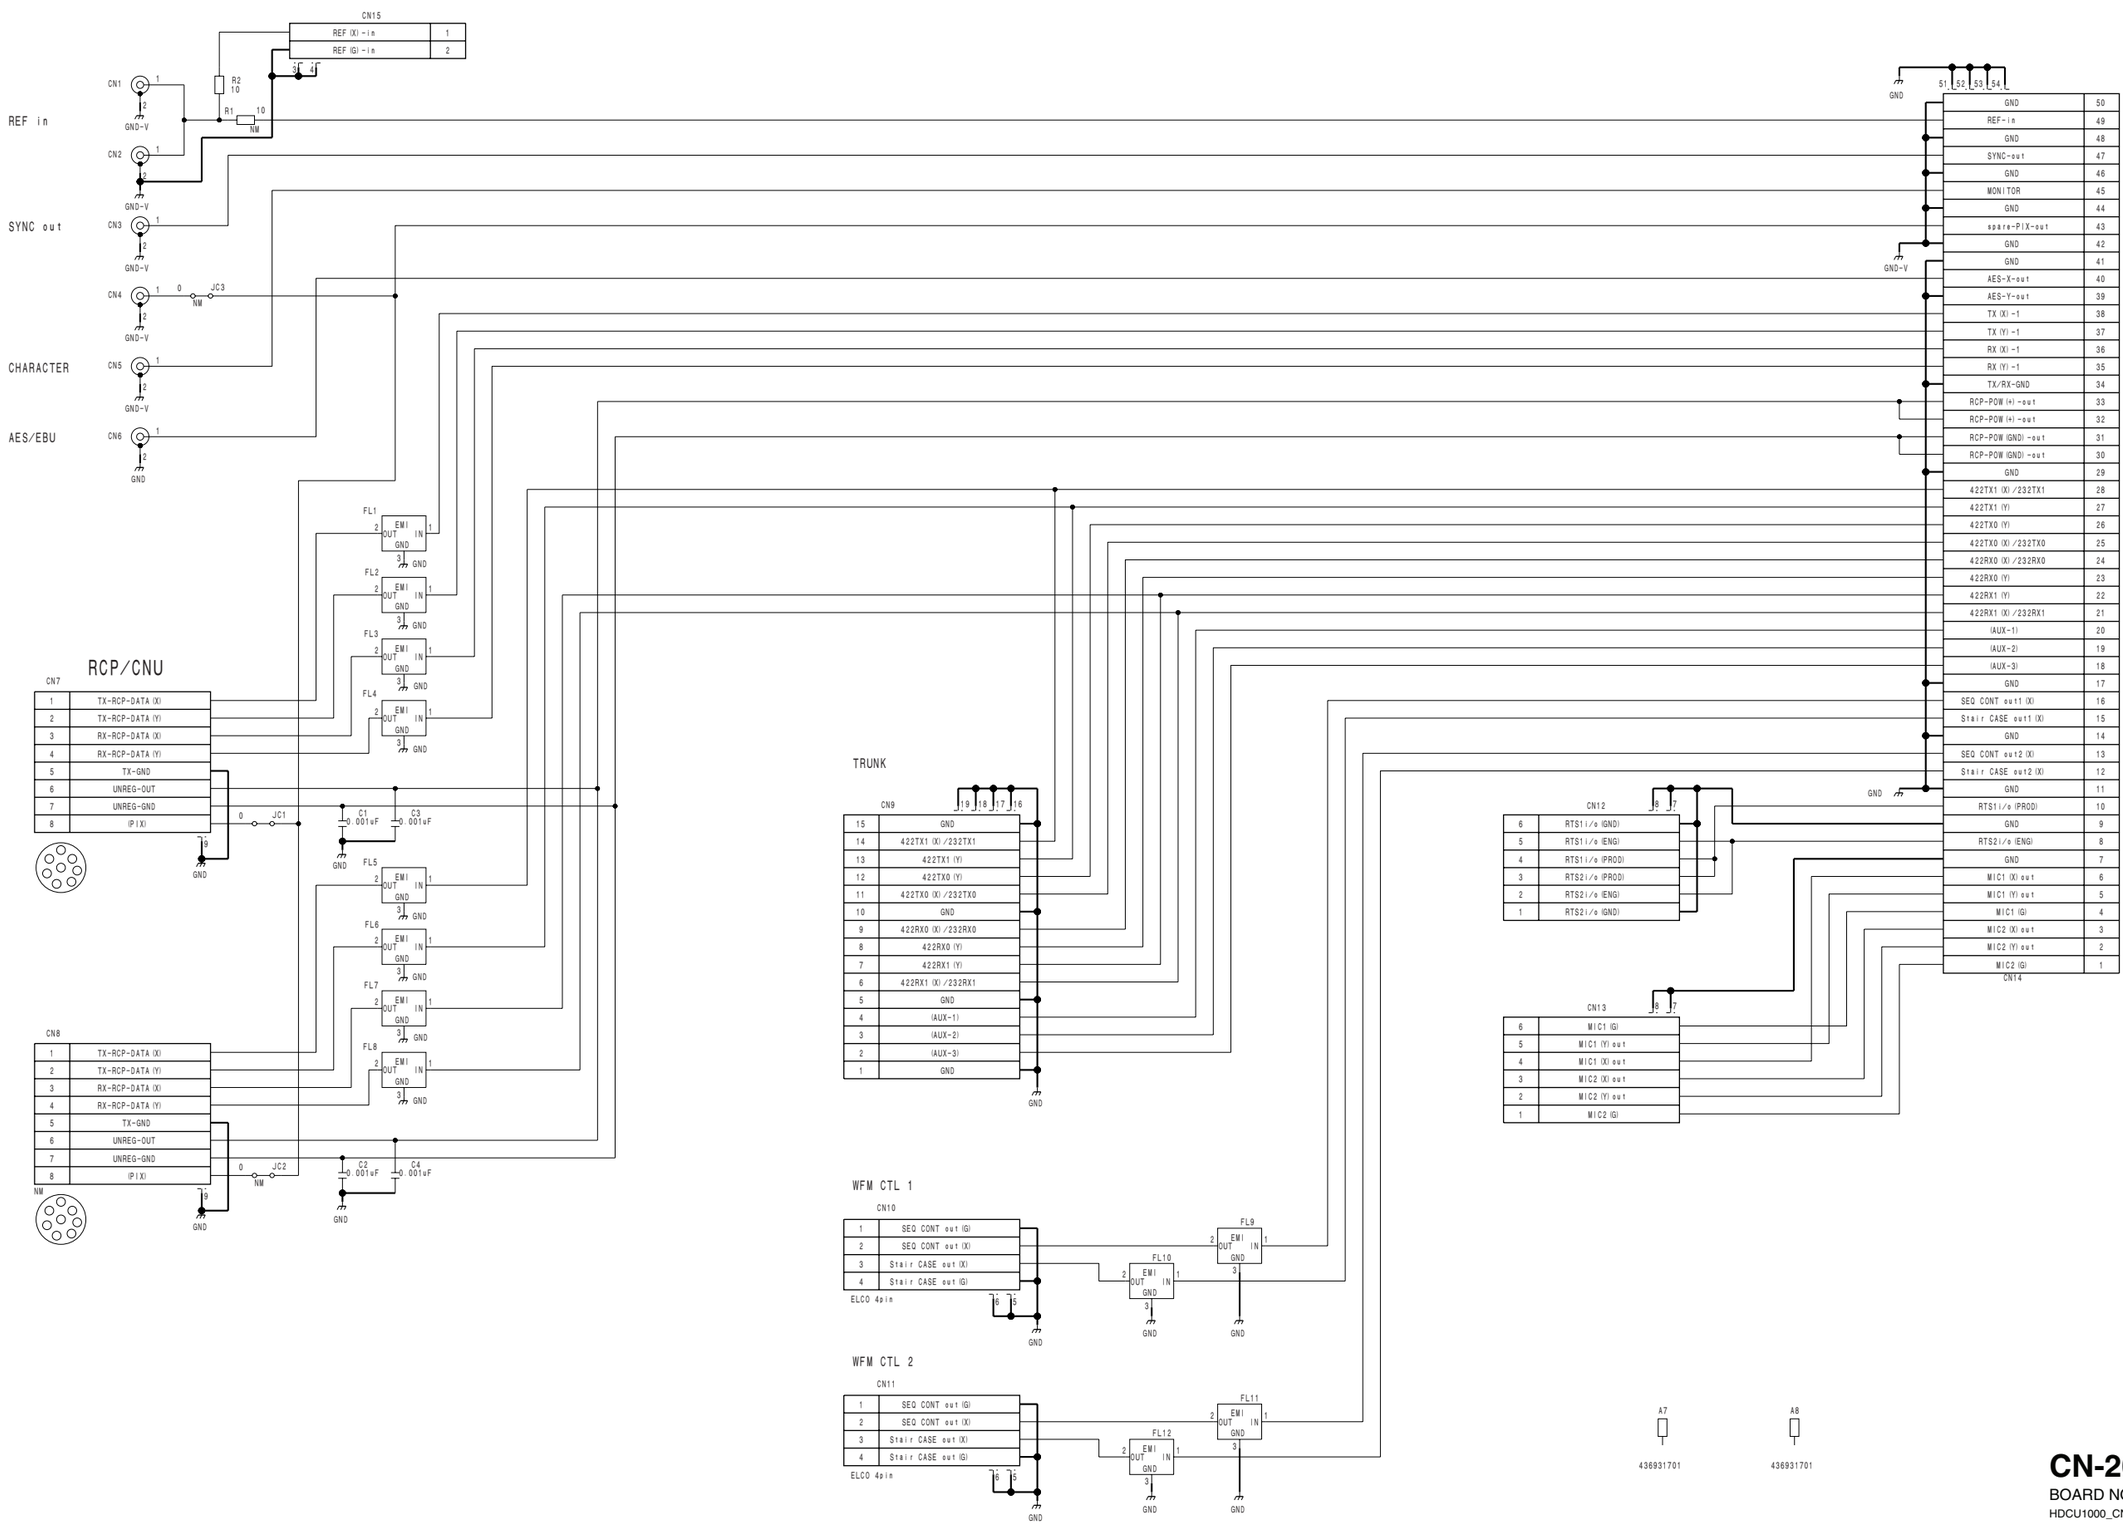


**CN-2672G**
BOARD NO. 1-867-890-11
HDCU1000_CN-2672_011_1

HDCU3300/MM (J,E)

## MIC1 (RTS1)

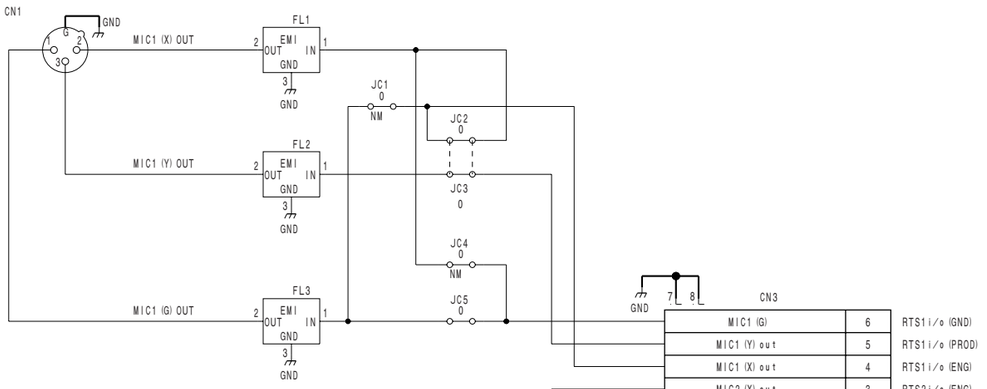


## MIC2 (RTS2)

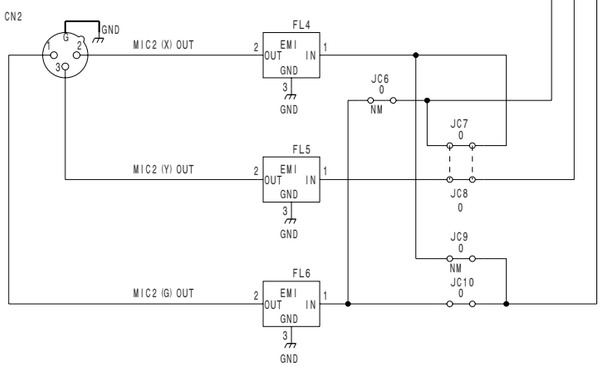


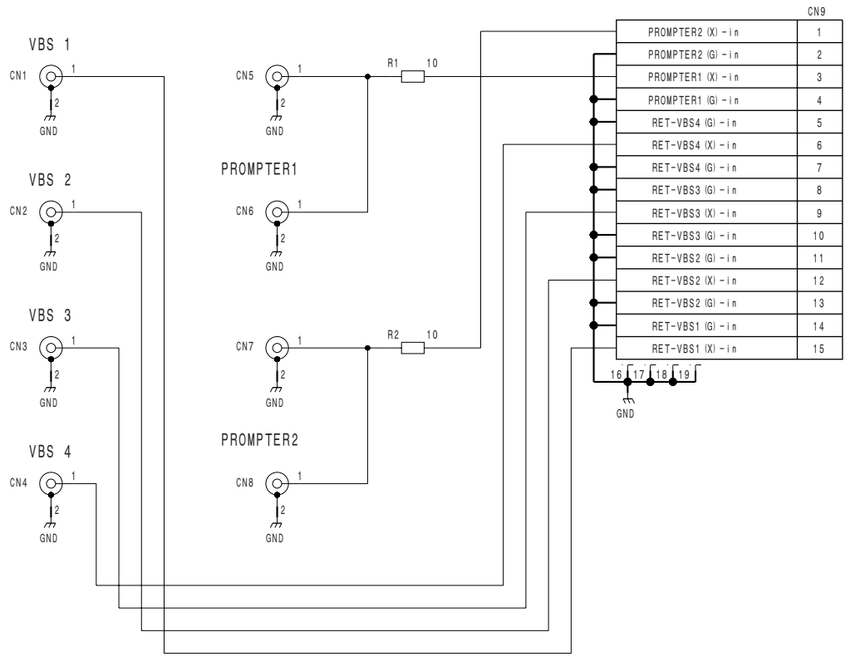


**CN-2673**
BOARD NO. 1-867-887-11
HDCU1000_CN-2673_011_1

**CN-2674G**
BOARD NO. 1-867-891-11
HDCU1000_CN-2674_011_1

CN-2700, CN-2718, CN-2805G
SUFFIX: -11 SUFFIX: -11 SUFFIX: -11

1 : Talk-Y
2 : Talk-X
3 : GND
4 : Receive
5 : PGM

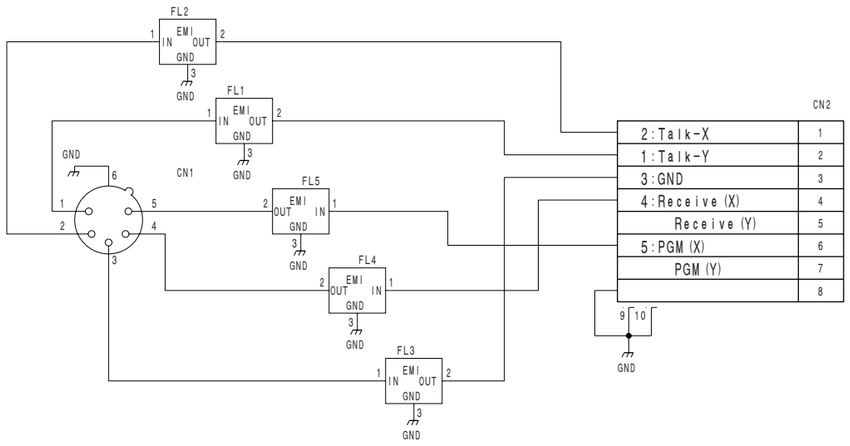


## CN-2700

BOARD NO. 1-867-874-11

HDCU1000_CN-2700_011_1

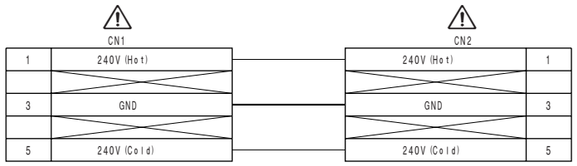


## CN-2718

BOARD NO. 1-867-875-11

HDCU1000_CN-2718_011_1

TRUNK

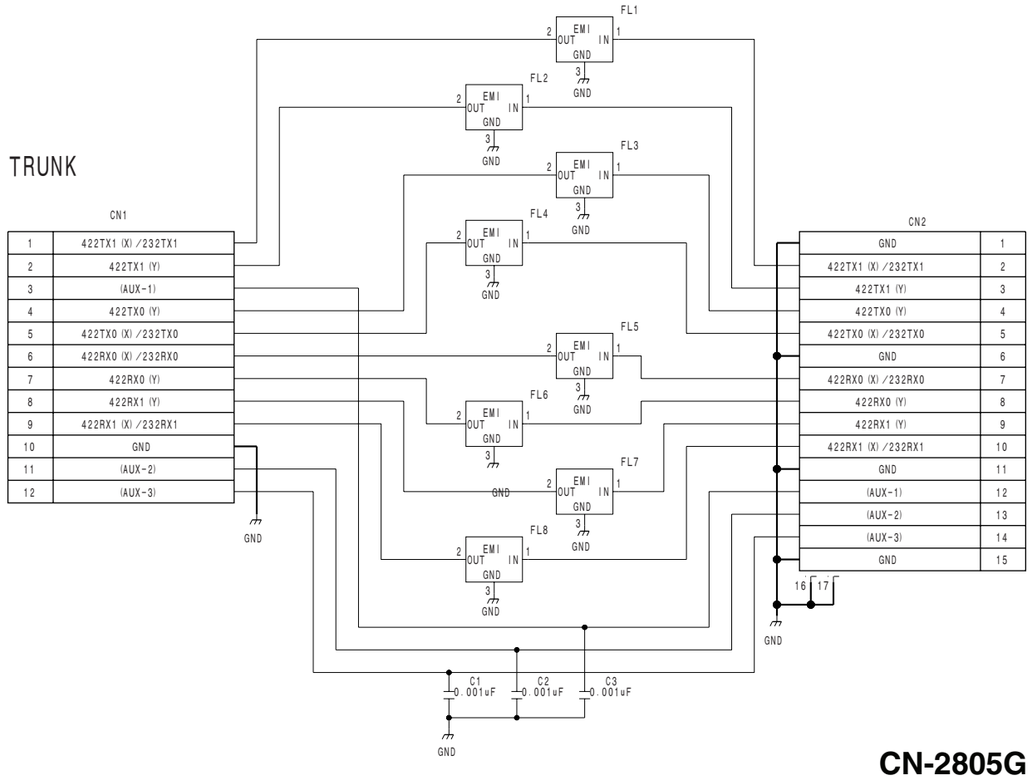


## CN-2805G

BOARD NO. 1-867-873-11

HDCU1000_CN-2805_011_1

**CNB-21G (1/2)**
**SUFFIX: -11**


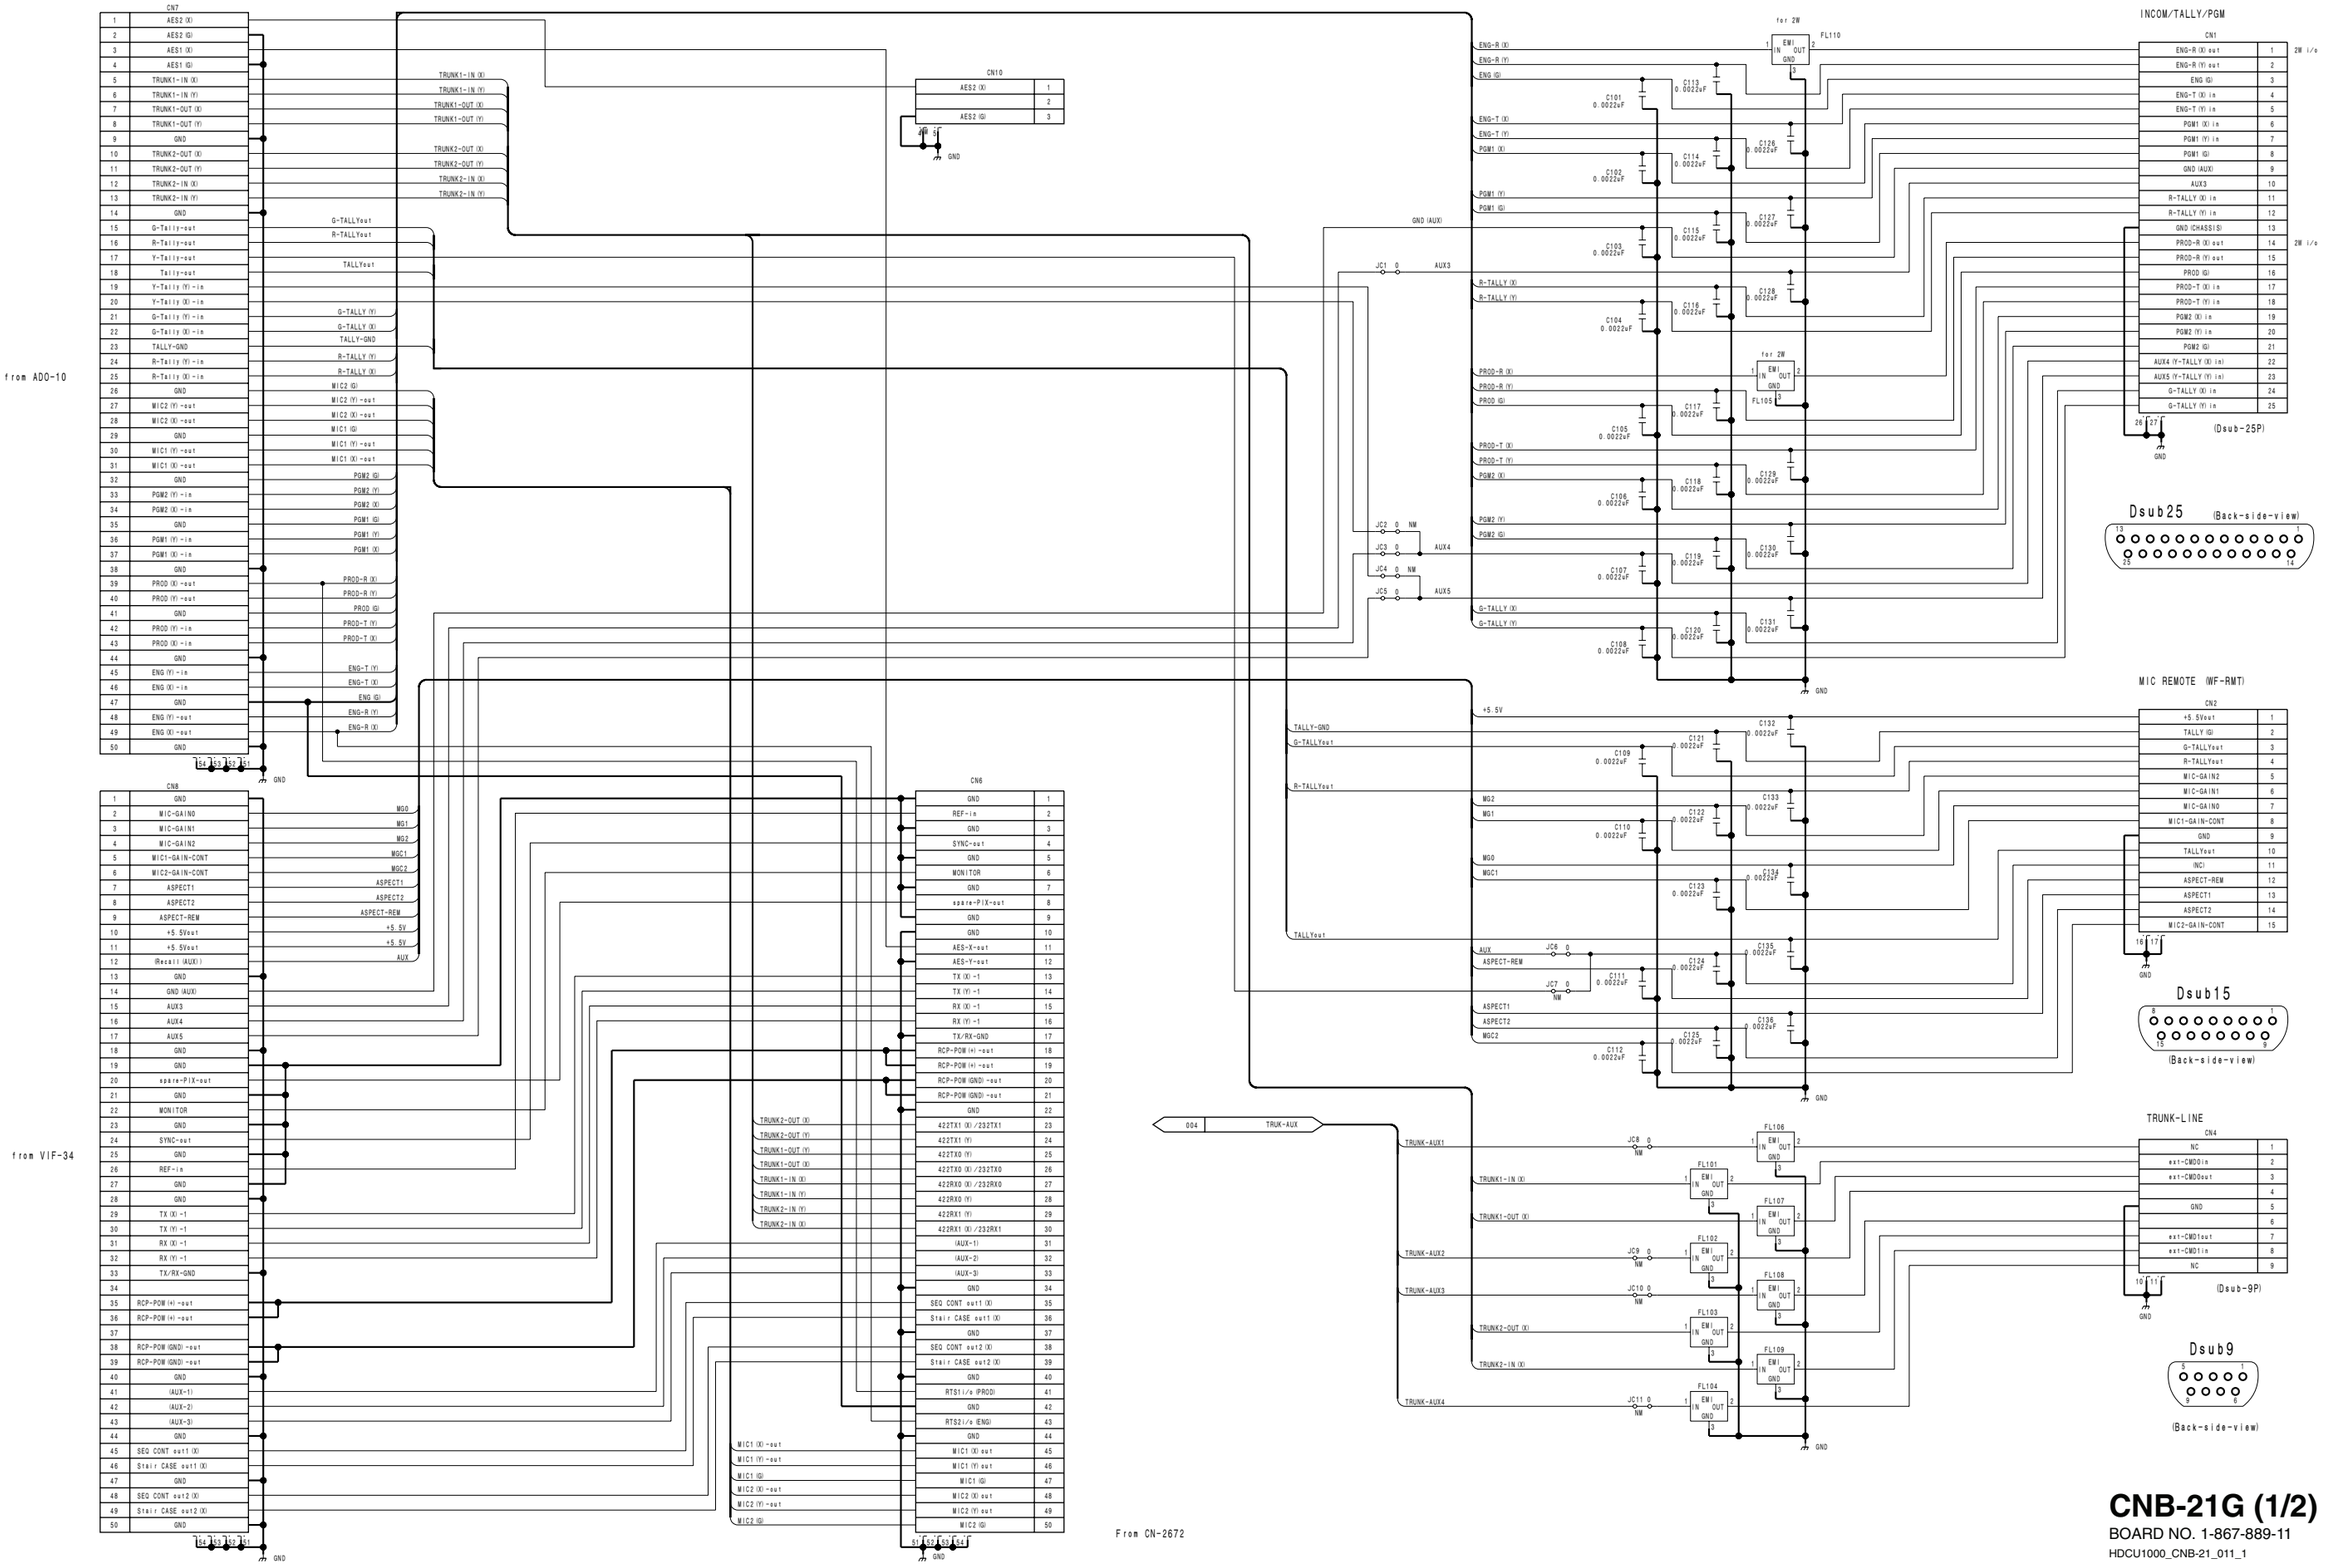




7-26


**CNB-21G (1/2)**
BOARD NO. 1-867-889-11
HDCU1000_CNB-21_011_1

HDCU3300/MM (J,E)

**CNB-21G (2/2)** **SUFFIX: -11**

from VIF-34

CN9

| | |
|---|---|
| 1 | GND |
| 2 | (30/35HD-1) |
| 3 | (30/35HD-2) |
| 4 | (30/35HD-10) |
| 5 | (30/35HD-3) |
| 6 | (30/35HD-11) |
| 7 | (30/35HD-4) |
| 8 | Recall5 (ENC) |
| 9 | Recall2 (G) |
| 10 | Recall6 (R+B) |
| 11 | Recall3 (B) |
| 12 | Recall7 (R+G) |
| 13 | Recall (R) |
| 14 | Recall8 (G+B) |
| 15 | Recall4 (SEQ) |
| 16 | GND |
| 17 | TRUNK-AUX1 |
| 18 | TRUNK-AUX2 |
| 19 | TRUNK-AUX3 |
| 20 | TRUNK-AUX4 |
| 21 | GND |
| 22 | in8 |
| 23 | out6 |
| 24 | in7 |
| 25 | out5 |
| 26 | in6 |
| 27 | out4 |
| 28 | in5 |
| 29 | out3 |
| 30 | in4 |
| 31 | out2 |
| 32 | in3 |
| 33 | out1 |
| 34 | in2 |
| 35 | in1 |
| 36 | GND |
| 37 | GND |
| 38 | GND |
| 39 | GND |
| 40 | GND |
| 41 | GND |
| 42 | GND |
| 43 | GND |
| 44 | GND |
| 45 | GND |
| 46 | GND |
| 47 | GND |
| 48 | GND |
| 49 | GND |
| 50 | GND |

54 53 52 51 GND

(30/35HD-1) (30/35HD-2) (30/35HD-10) (30/35HD-3) (30/35HD-11) (30/35HD-4) Recall5 (ENC) Recall2 (G) Recall6 (R+B) Recall3 (B) Recall7 (R+G) Recall (R) Recall8 (G+B) Recall4 (SEQ)

TRUNK-AUX1 TRUNK-AUX2 TRUNK-AUX3 TRUNK-AUX4

TRUK-AUX 004

in8 out6 in7 out5 in6 out4 in5 out3 in4 out2 in3 out1 in2 in1

WF-REMOTE (1735HD/1730HD)

CN3

| | |
|---|---|
| (30/35HD-1) | 1 |
| (30/35HD-2) | 2 |
| (30/35HD-3) | 3 |
| (30/35HD-4) | 4 |
| Recall2 (G) | 5 |
| Recall3 (B) | 6 |
| Recall (R) | 7 |
| Recall4 (SEQ) | 8 |
| GND | 9 |
| (30/35HD-10) | 10 |
| (30/35HD-11) | 11 |
| Recall5 (ENC) | 12 |
| Recall6 (R+B) | 13 |
| Recall7 (R+G) | 14 |
| Recall8 (G+B) | 15 |

16 17 GND (Dsub-15P)

(30/35HD-1) (30/35HD-2) (30/35HD-3) (30/35HD-4) Recall2 (G) Recall3 (B) Recall (R) Recall4 (SEQ) (30/35HD-10) (30/35HD-11) Recall5 (ENC) Recall6 (R+B) Recall7 (R+G) Recall8 (G+B)

C201 C202 C203 C204 C205 C206 C207 C208 C209 C210 C211 C212 C213 C214 C215 C216 C217 C218 0.0022uF

C219 C220 C221 C222 C223 C224 C225 C226 C227 C228 0.0022uF

GND

Dsub15 (Back-side-view)

8 1 15 9

I/O

CN5

| | |
|---|---|
| in1 | 1 |
| in2 | 2 |
| in3 | 3 |
| in4 | 4 |
| in5 | 5 |
| in6 | 6 |
| in7 | 7 |
| in8 | 8 |
| GND | 9 |
| out1 | 10 |
| out2 | 11 |
| out3 | 12 |
| out4 | 13 |
| out5 | 14 |
| out6 | 15 |

16 17 GND (Dsub-15P)

in1 in2 in3 in4 in5 in6 in7 in8 out1 out2 out3 out4 out5 out6

C201 C202 C203 C204 C205 C206 C207 C208 C209 C210 C211 C212 C213 C214 C215 C216 C217 C218 0.0022uF

C219 C220 C221 C222 C223 C224 C225 C226 C227 C228 0.0022uF

GND

Dsub15 (Back-side-view)

8 1 15 9

**CNB-21G (2/2)**
BOARD NO. 1-867-889-11
HDCU1000_CNB-21_011_2

# CPU-395 (1/3)
**SUFFIX: -11**

CPU-395 (1/3)
SUFFIX: -11

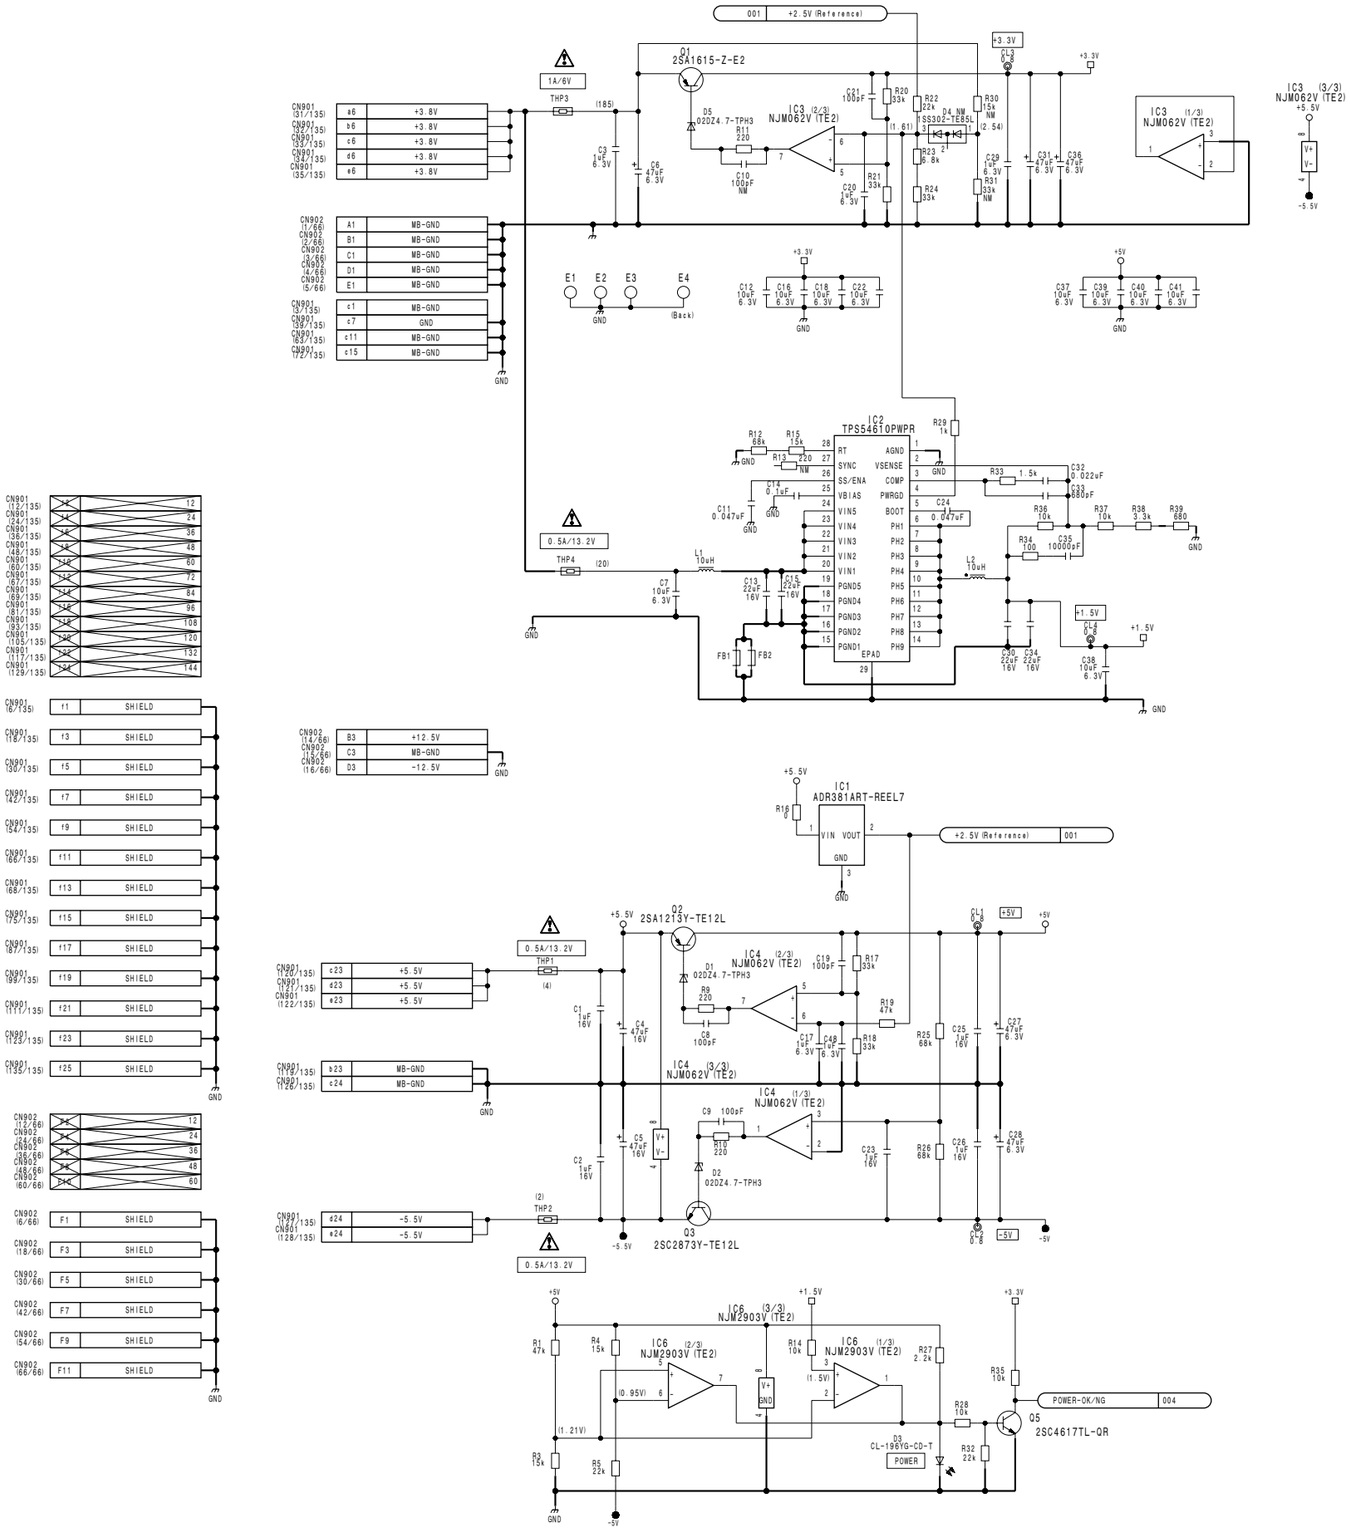


| | | |
|---|---|---|
| CN901 (7/135) | a1 | nc |
| CN901 (9/135) | b1 | nc |
| CN901 (3/135) | d1 | nc |
| CN901 (5/135) | e1 | nc |
| CN901 (7/135) | a2 | nc |
| CN901 (8/135) | b2 | nc |
| CN901 (9/135) | c2 | nc |
| CN901 (10/135) | d2 | nc |
| CN901 (11/135) | e2 | nc |
| CN901 (13/135) | a3 | nc |
| CN901 (14/135) | b3 | nc |
| CN901 (15/135) | c3 | nc |
| CN901 (16/135) | d3 | nc |
| CN901 (17/135) | e3 | nc |
| CN901 (19/135) | a4 | nc |
| CN901 (20/135) | b4 | nc |
| CN901 (21/135) | c4 | nc |
| CN901 (25/135) | a5 | PANEL-COM-TR (X) -out |
| CN901 (26/135) | b5 | PANEL-COM-TR (Y) -out |
| CN901 (27/135) | c5 | PANEL-GND |
| CN901 (29/135) | d5 | PANEL-COM-RC (Y) -in |
| CN901 (28/135) | e5 | PANEL-COM-RC (X) -in |
| CN901 (37/135) | a7 | nc |
| CN901 (38/135) | b7 | nc |
| CN901 (41/135) | a7 | nc |
| CN901 (43/135) | a8 | nc |
| CN901 (44/135) | b8 | nc |
| CN901 (45/135) | c8 | nc |
| CN901 (46/135) | d8 | nc |
| CN901 (47/135) | e8 | nc |
| CN901 (49/135) | a9 | TC (X) -in |
| CN901 (50/135) | b9 | TC (Y) -in |
| CN901 (55/135) | a10 | nc |
| CN901 (56/135) | b10 | nc |
| CN901 (70/135) | a15 | nc |
| CN901 (71/135) | b15 | nc |
| CN901 (72/135) | d15 | nc |
| CN901 (74/135) | e15 | nc |
| CN901 (75/135) | a16 | nc |
| CN901 (76/135) | c16 | nc |
| CN901 (77/135) | d16 | nc |
| CN901 (80/135) | e16 | nc |
| CN901 (82/135) | a17 | nc |
| CN901 (83/135) | b17 | nc |
| CN901 (84/135) | c17 | nc |
| CN901 (85/135) | d17 | nc |
| CN901 (86/135) | e17 | nc |
| CN901 (88/135) | a18 | nc |
| CN901 (89/135) | b18 | nc |
| CN901 (90/135) | c18 | nc |
| CN901 (94/135) | a19 | nc |
| CN901 (95/135) | b19 | nc |
| CN901 (96/135) | c19 | nc |
| CN901 (97/135) | d19 | nc |
| CN901 (98/135) | e19 | nc |
| CN901 (100/135) | a20 | nc |
| CN901 (101/135) | b20 | nc |
| CN901 (106/135) | a21 | nc |
| CN901 (107/135) | b21 | nc |
| CN901 (108/135) | c21 | nc |
| CN901 (112/135) | a22 | nc |
| CN901 (113/135) | b22 | nc |
| CN901 (114/135) | c22 | nc |
| CN901 (115/135) | d22 | nc |
| CN901 (116/135) | e22 | nc |
| CN901 (118/135) | a23 | nc |
| CN901 (124/135) | a24 | nc |
| CN901 (125/135) | b24 | nc |
| CN901 (130/135) | a25 | nc |
| CN901 (131/135) | b25 | nc |
| CN901 (132/135) | c25 | nc |
| CN901 (133/135) | d25 | nc |



7-28

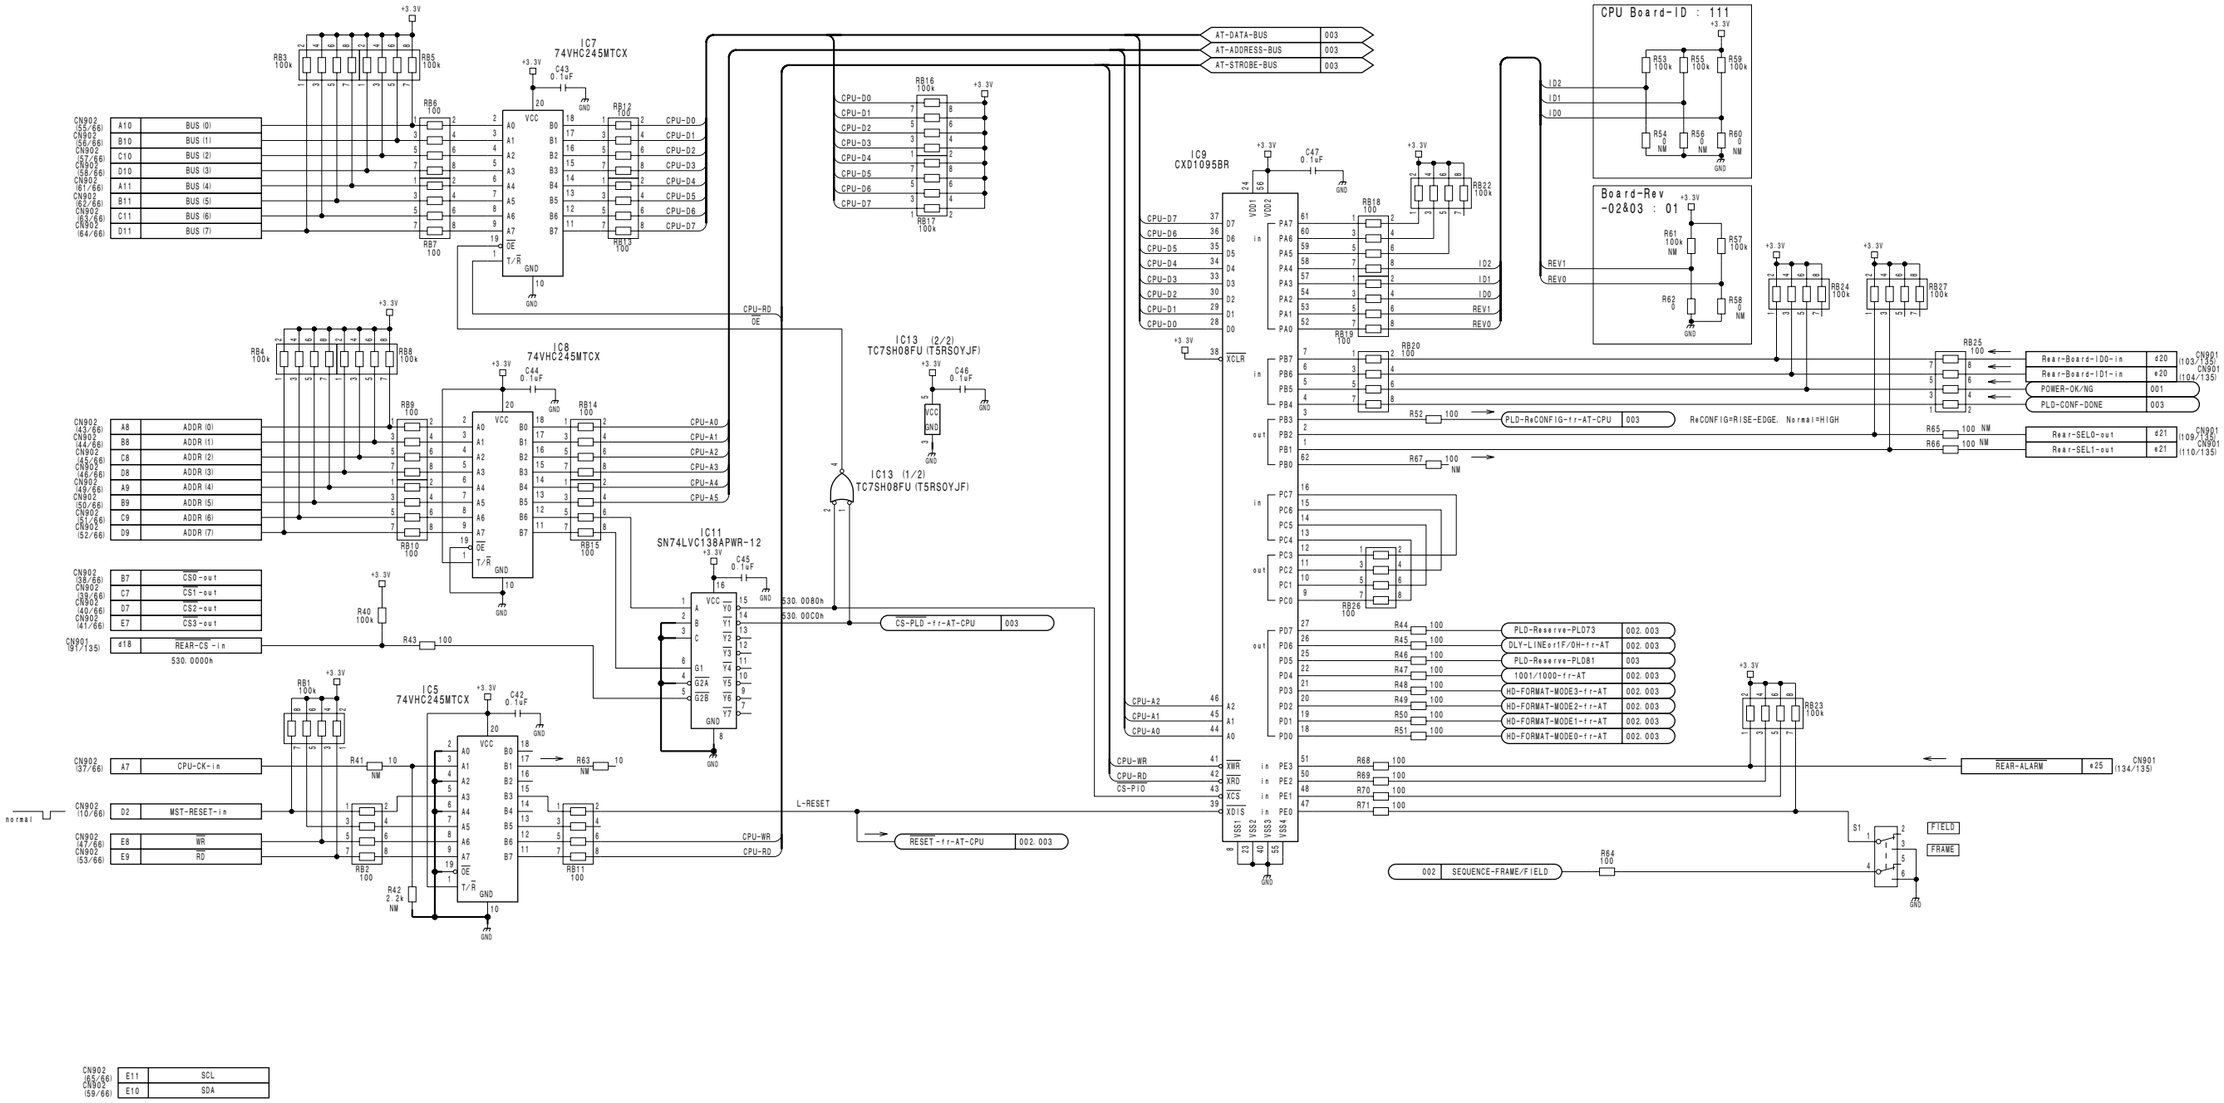


# CPU-395 (1/3)

BOARD NO. 1-871-675-11

HDCU3300_CPU-395_011_1

# CPU-395 (2/3)
SUFFIX: -11

# CPU-395 (2/3)
SUFFIX: -11

# CPU-395 (2/3)
SUFFIX: -11

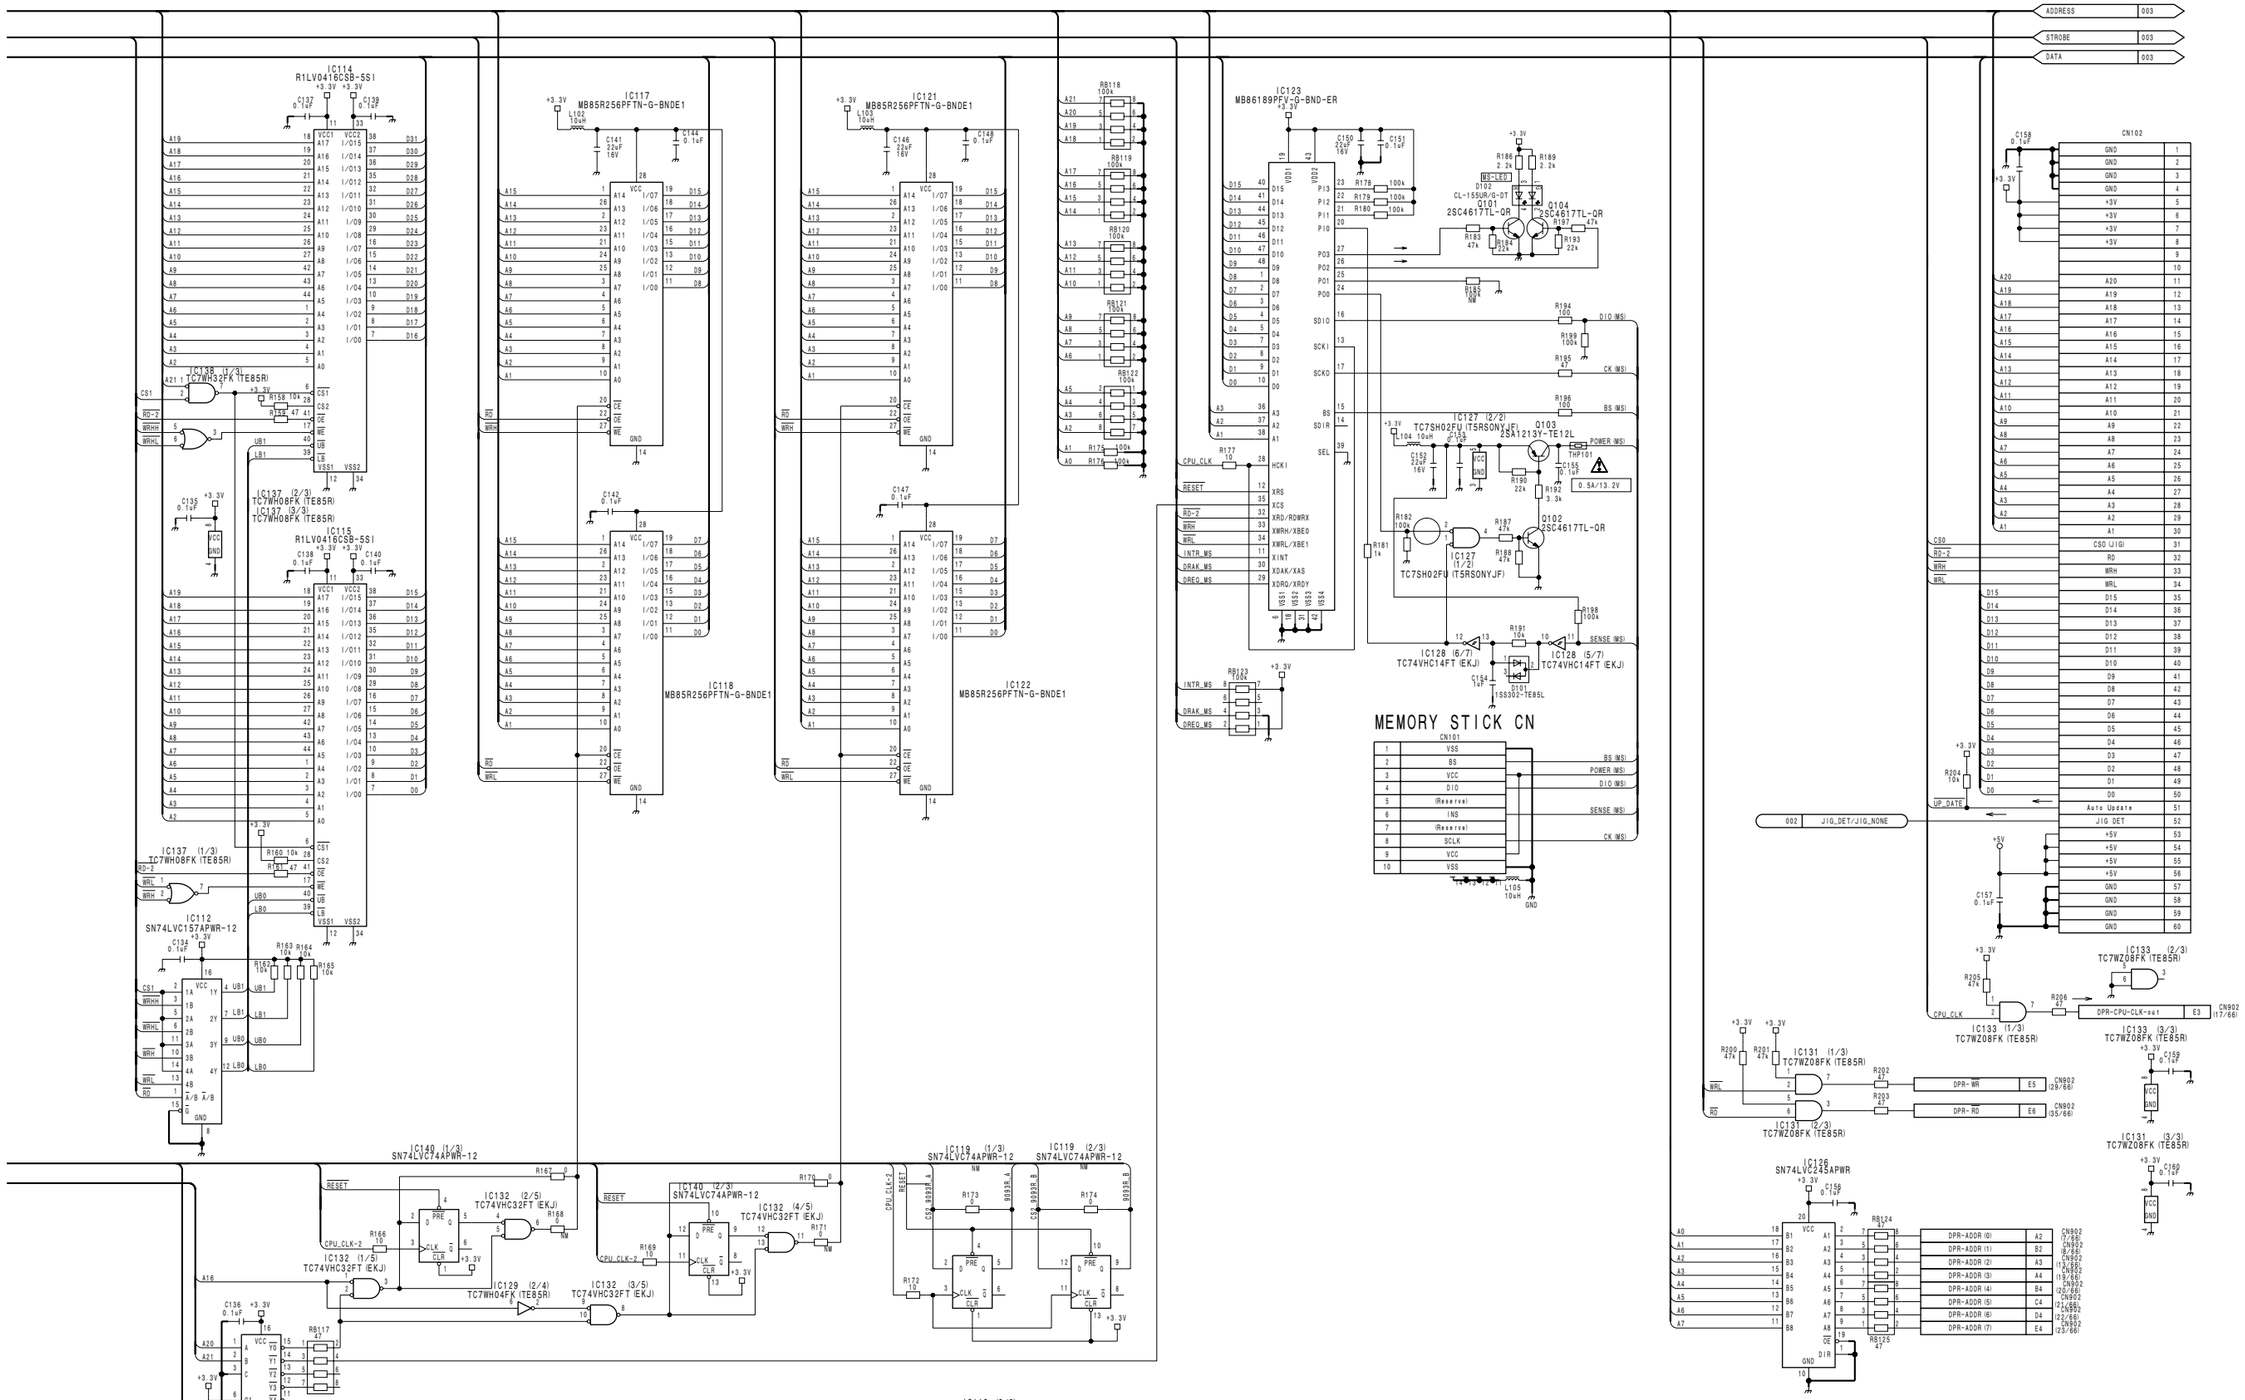


# CPU-395 (2/3)

BOARD NO. 1-871-675-11

HDCU3300_CPU-395_011_2

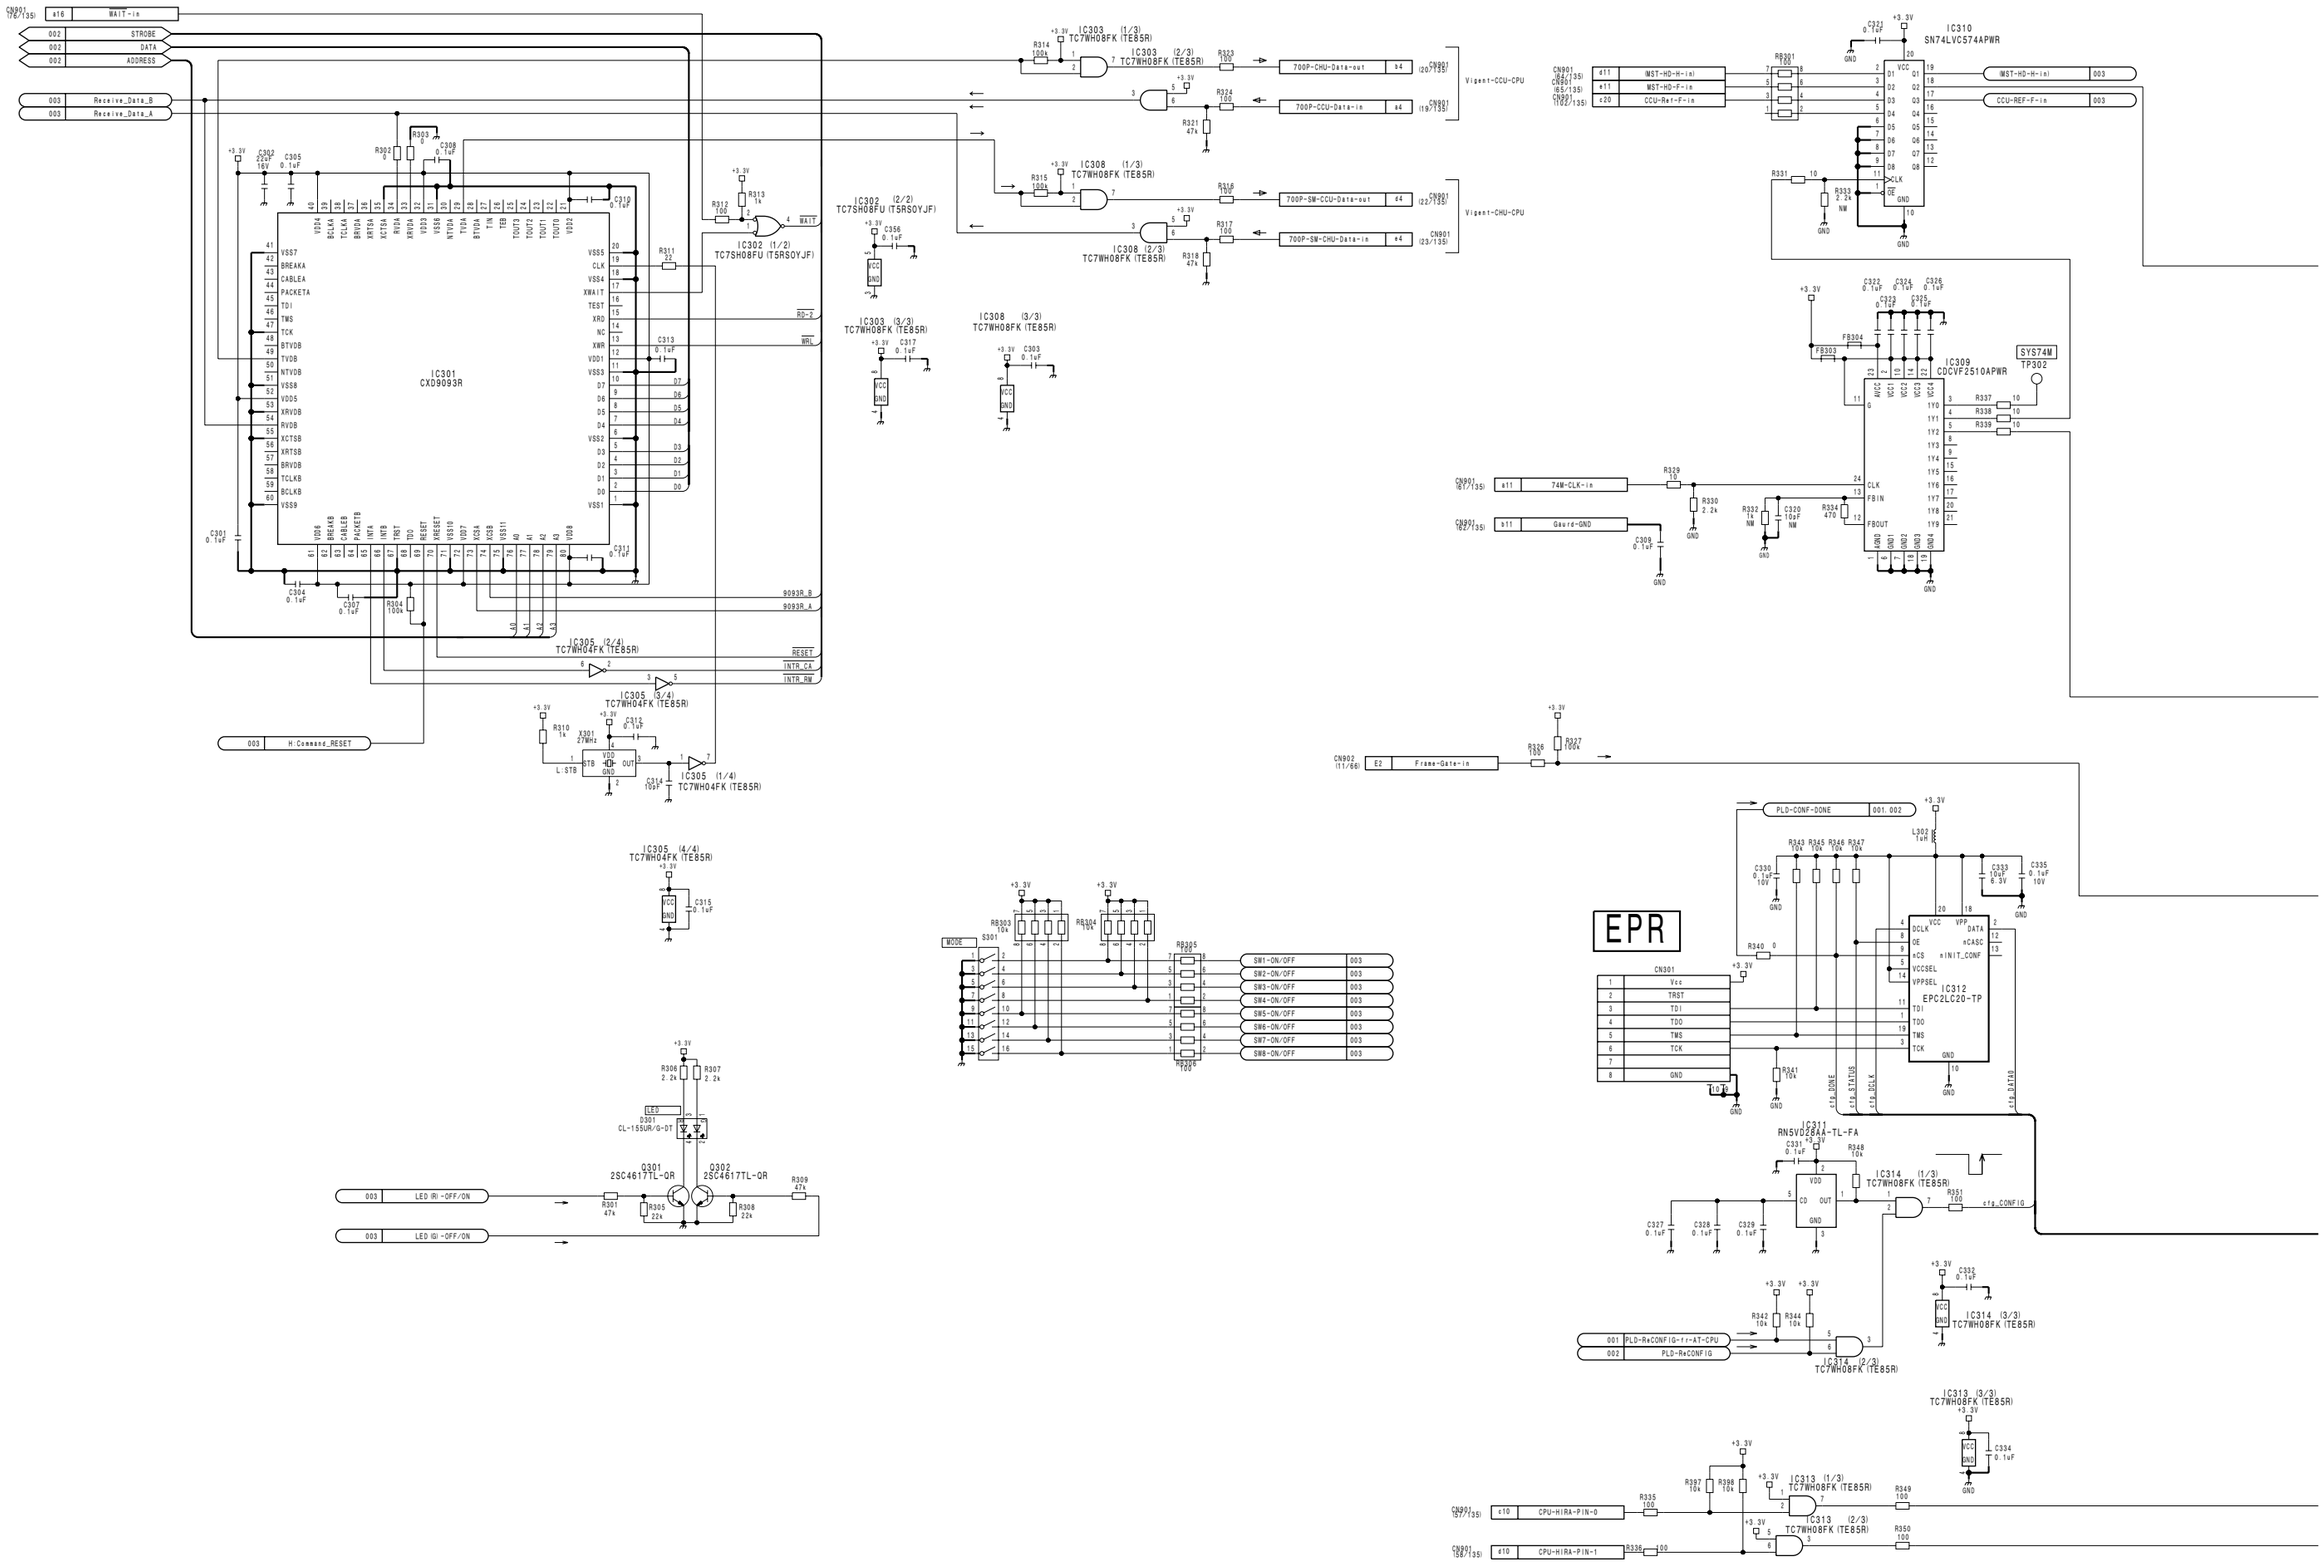
IC301 CXD9093R
IC302 (1/2) TC7SH08FU (T5RSOYJF)
IC302 (2/2) TC7SH08FU (T5RSOYJF)
IC303 (1/3) TC7WH08FK (TE85R)
IC303 (2/3) TC7WH08FK (TE85R)
IC303 (3/3) TC7WH08FK (TE85R)
IC305 (2/4) TC7WH04FK (TE85R)
IC305 (3/4) TC7WH04FK (TE85R)
IC305 (4/4) TC7WH04FK (TE85R)
IC308 (1/3) TC7WH08FK (TE85R)
IC308 (2/3) TC7WH08FK (TE85R)
IC308 (3/3) TC7WH08FK (TE85R)
IC310 SN74LVC574APWR
IC309 CDCVF2510APWR
IC311 RN5VD28AA-TL-FA
IC312 EPC2LC20-TP
IC313 (1/3) TC7WH08FK (TE85R)
IC313 (2/3) TC7WH08FK (TE85R)
IC313 (3/3) TC7WH08FK (TE85R)
IC314 (1/3) TC7WH08FK (TE85R)
IC314 (2/3) TC7WH08FK (TE85R)
IC314 (3/3) TC7WH08FK (TE85R)
EPR
WAIT-in
STROBE
DATA
ADDRESS
Receive_Data_B
Receive_Data_A
H:Command_RESET
700P-CHU-Data-out
700P-CCU-Data-in
700P-SW-CCU-Data-out
700P-SW-CHU-Data-in
Vigent-CCU-CPU
Vigent-CHU-CPU
MST-HD-H-in
MST-HD-F-in
CCU-Ref-F-in
MST-HD-H-in
CCU-REF-F-in
74M-CLK-in
Gaurd-GND
SYS74M
Frame-Gate-in
PLD-CONF-DONE
PLD-ReCONFIG-fr-AT-CPU
PLD-ReCONFIG
cfg_CONFIG
CPU-HIRA-PIN-0
CPU-HIRA-PIN-1
LED (R)-OFF/ON
LED (G)-OFF/ON
SW1-ON/OFF
SW2-ON/OFF
SW3-ON/OFF
SW4-ON/OFF
SW5-ON/OFF
SW6-ON/OFF
SW7-ON/OFF
SW8-ON/OFF
RD-2
WRL
RESET
INTR_CK
INTR_RW
9093R_B
9093R_A

# CPU-395 (3/3)
SUFFIX: -11

CPU-395 (3/3)
SUFFIX: -11

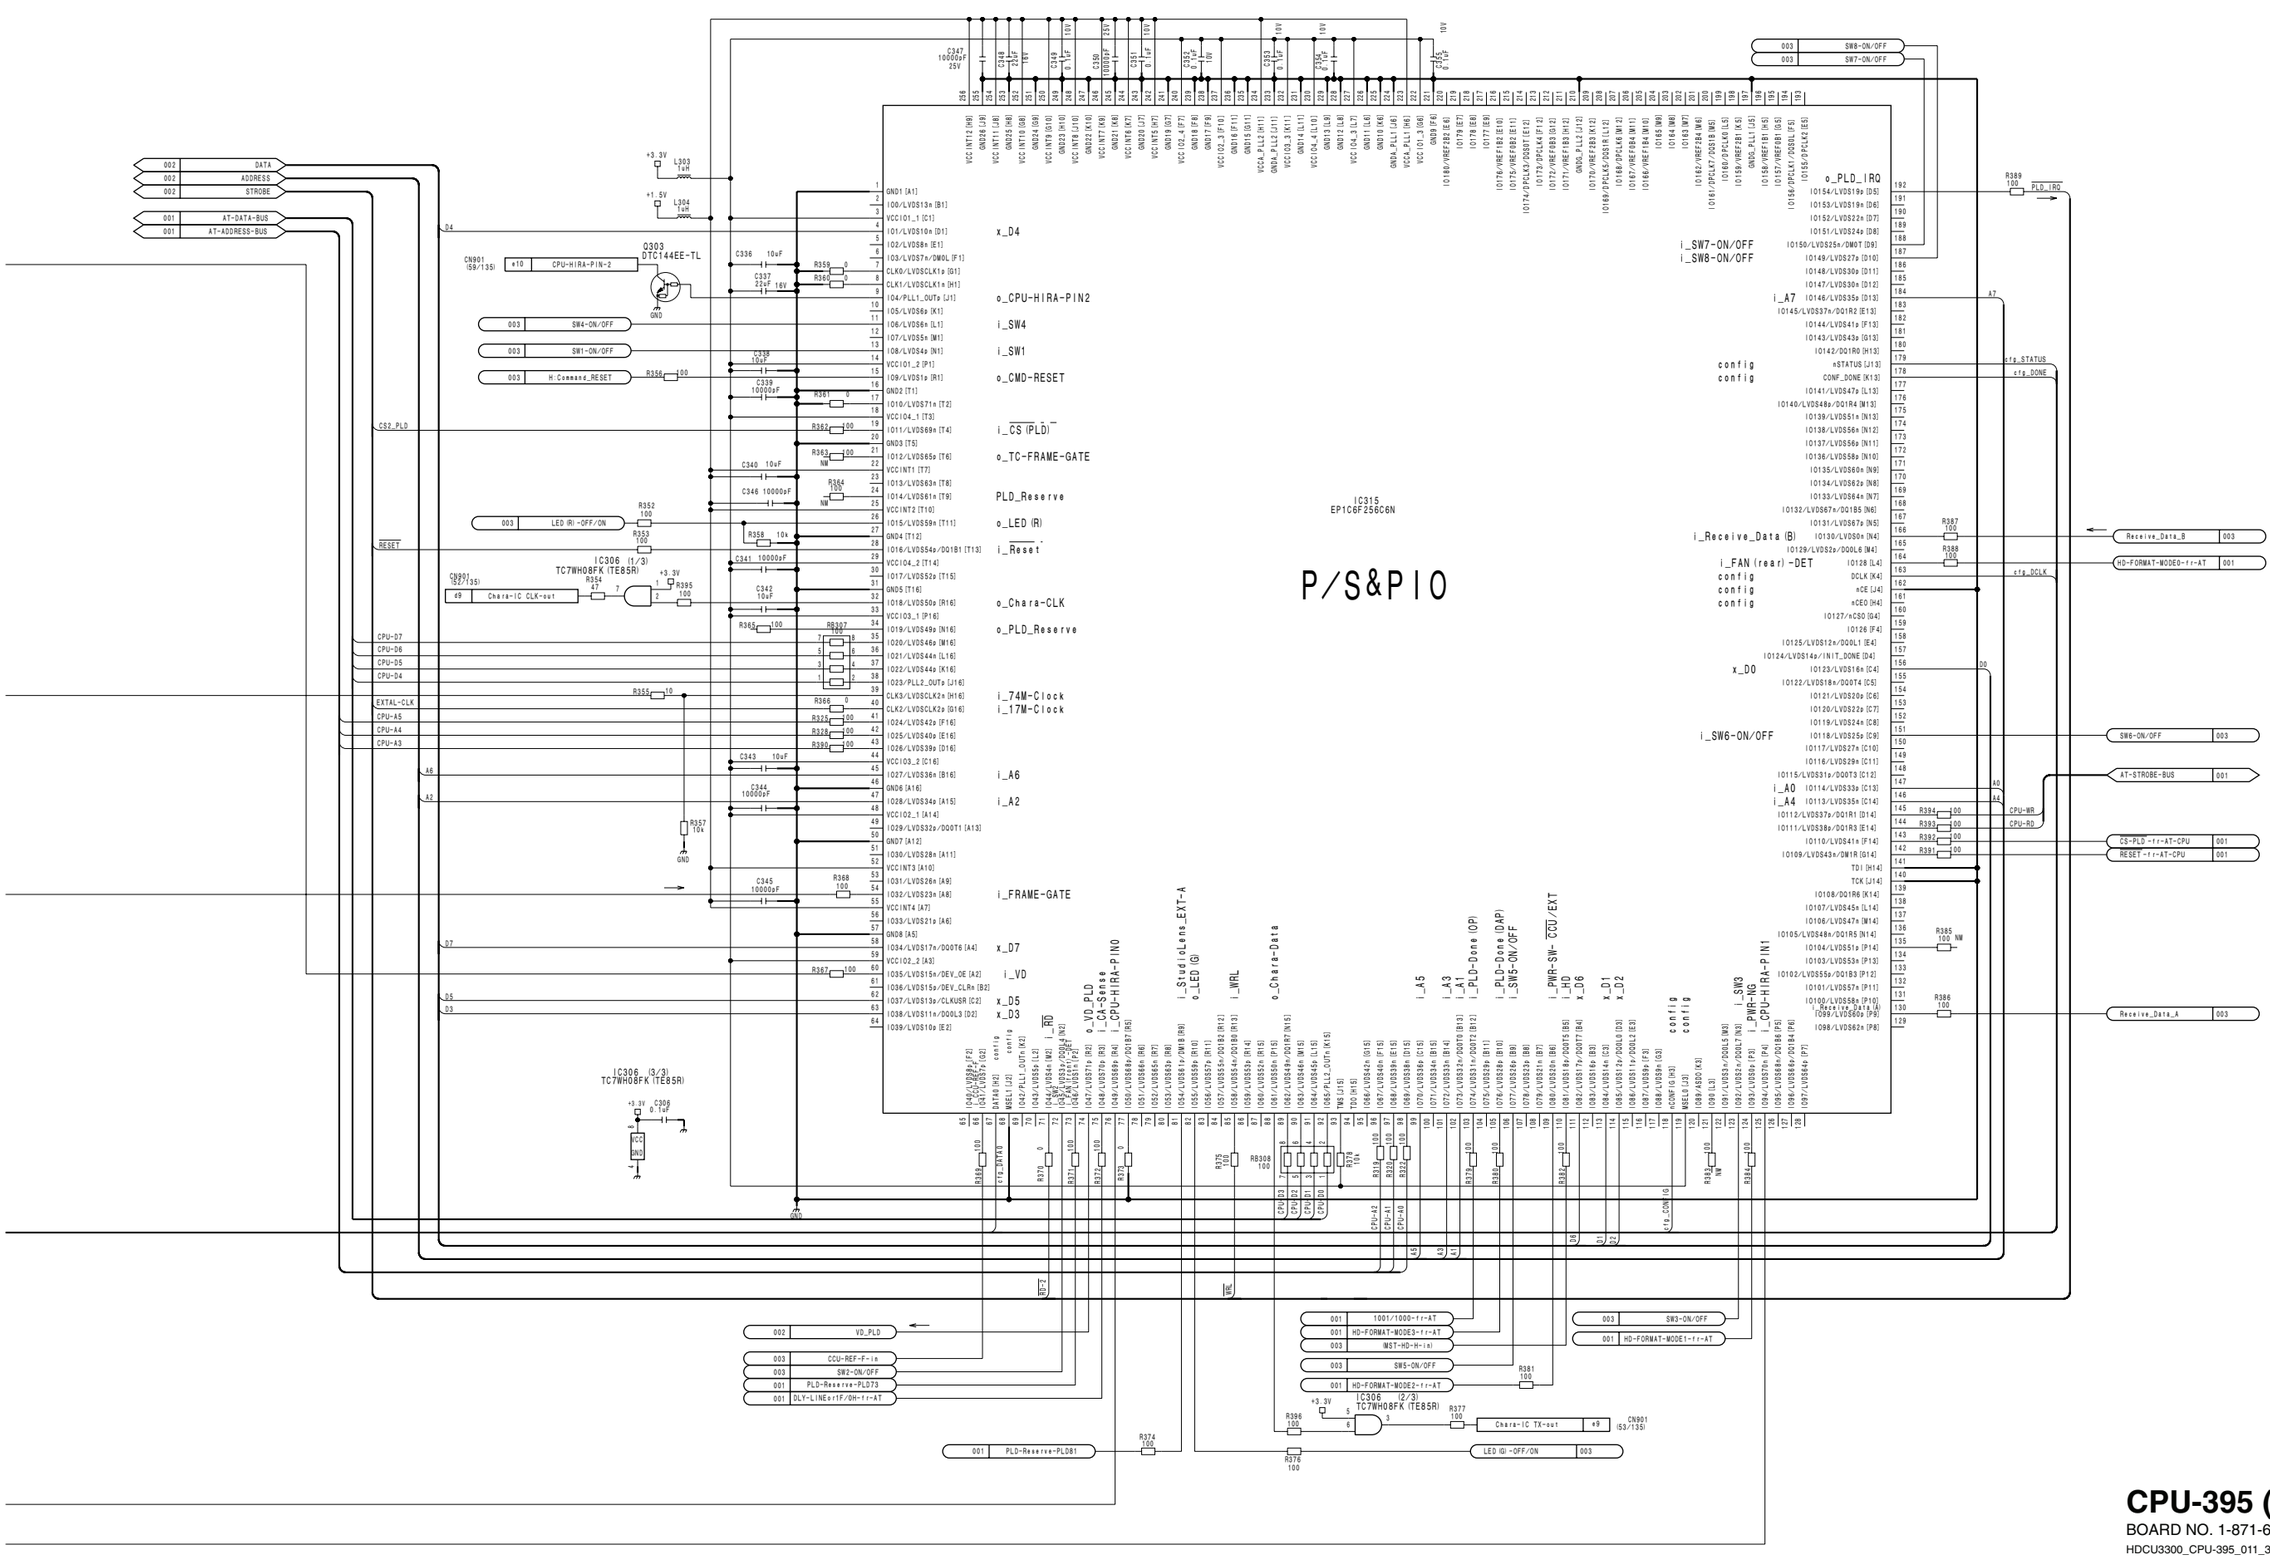


# CPU-395 (3/3)
BOARD NO. 1-871-675-11
HDCU3300_CPU-395_011_3

**DPR-271A (1/9)**
**SUFFIX: -11**

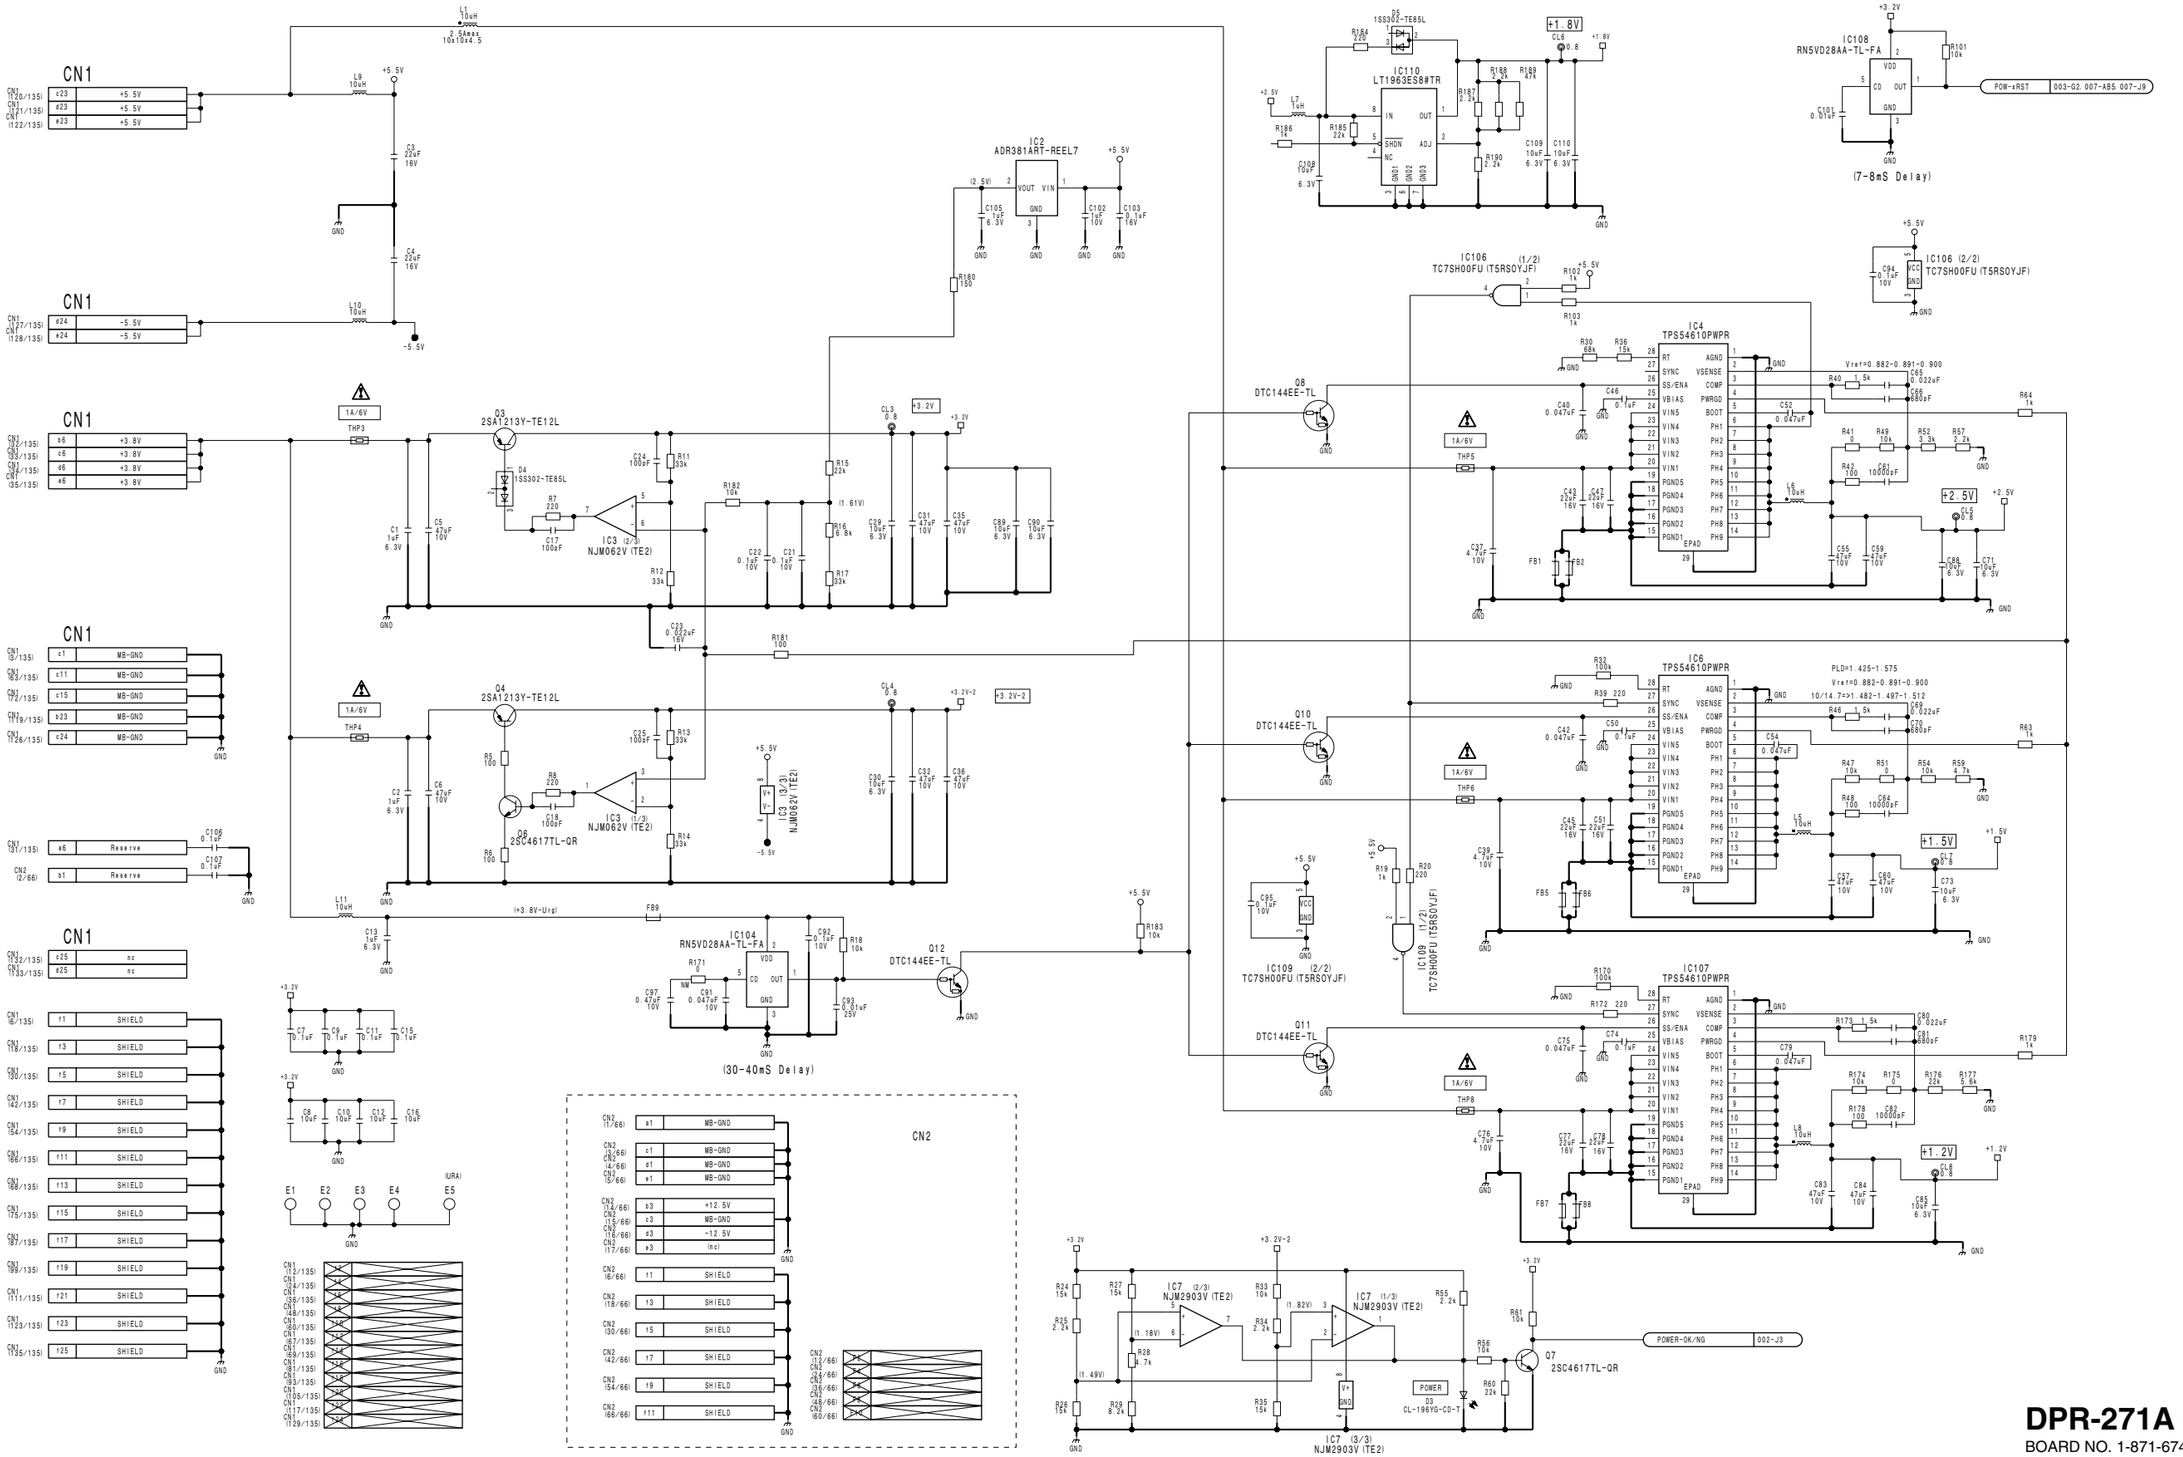


**DPR-271A (1/9)**
BOARD NO. 1-871-674-11
HDCU3300_DPR-271A_011_1

**DPR-271A (2/9)**
**SUFFIX: -11**

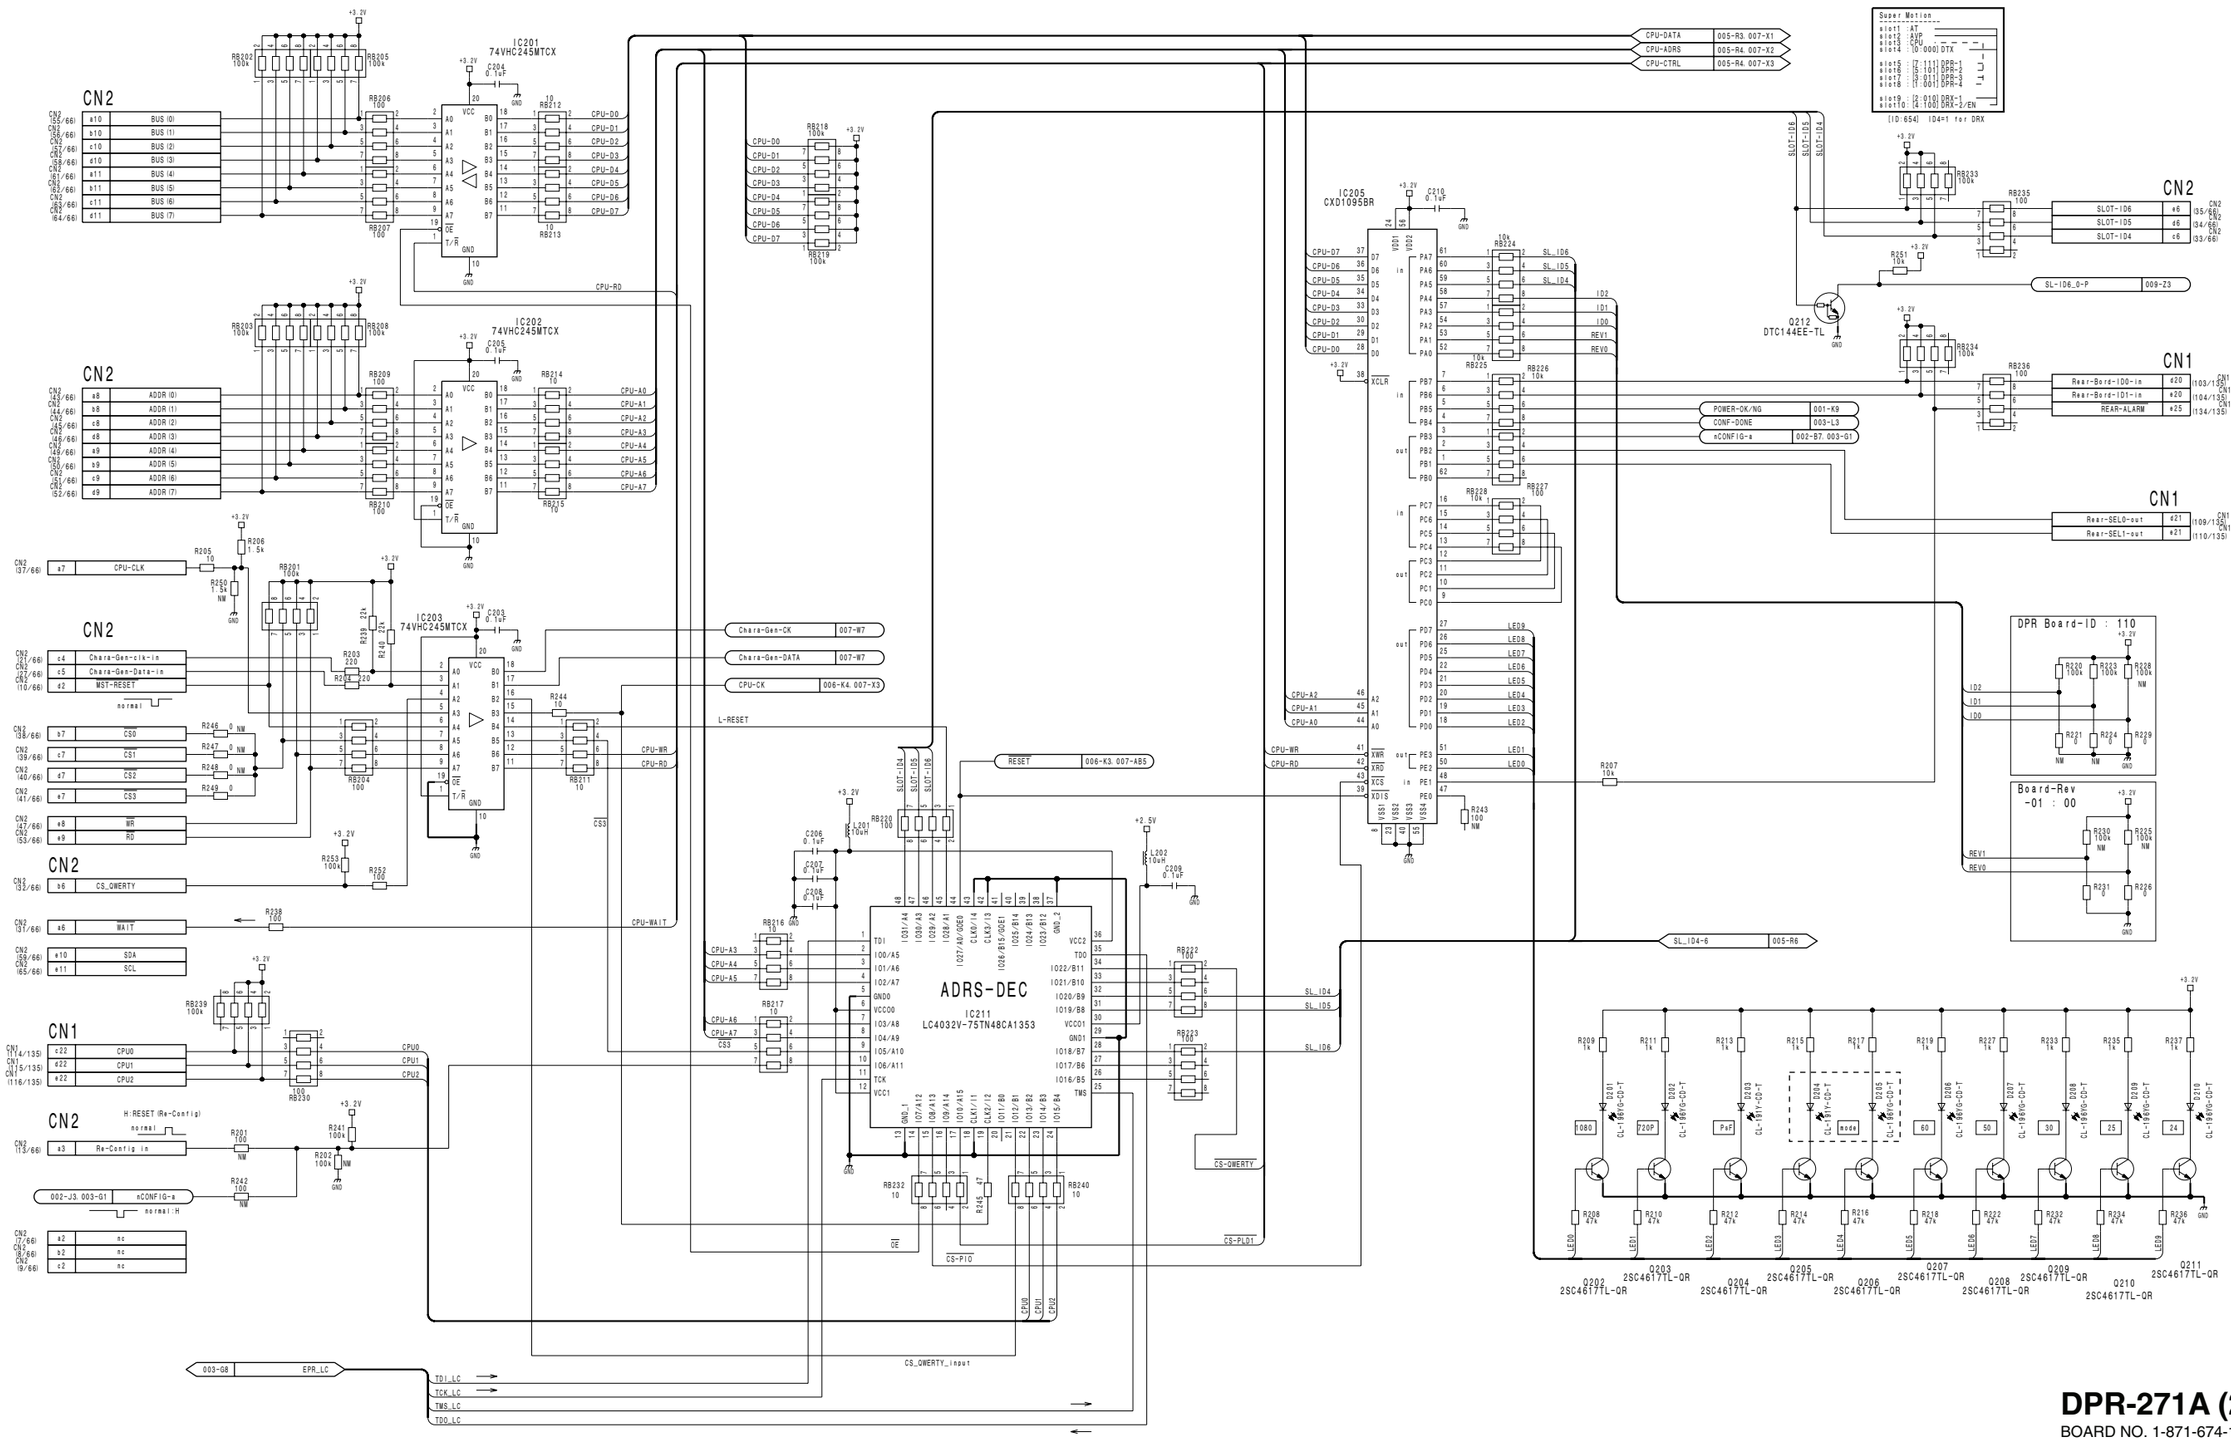


# DPR-271A (2/9)

BOARD NO. 1-871-674-11

HDCU3300_DPR-271A_011_2


7-35

DPR-271A (3/9)
SUFFIX: -11

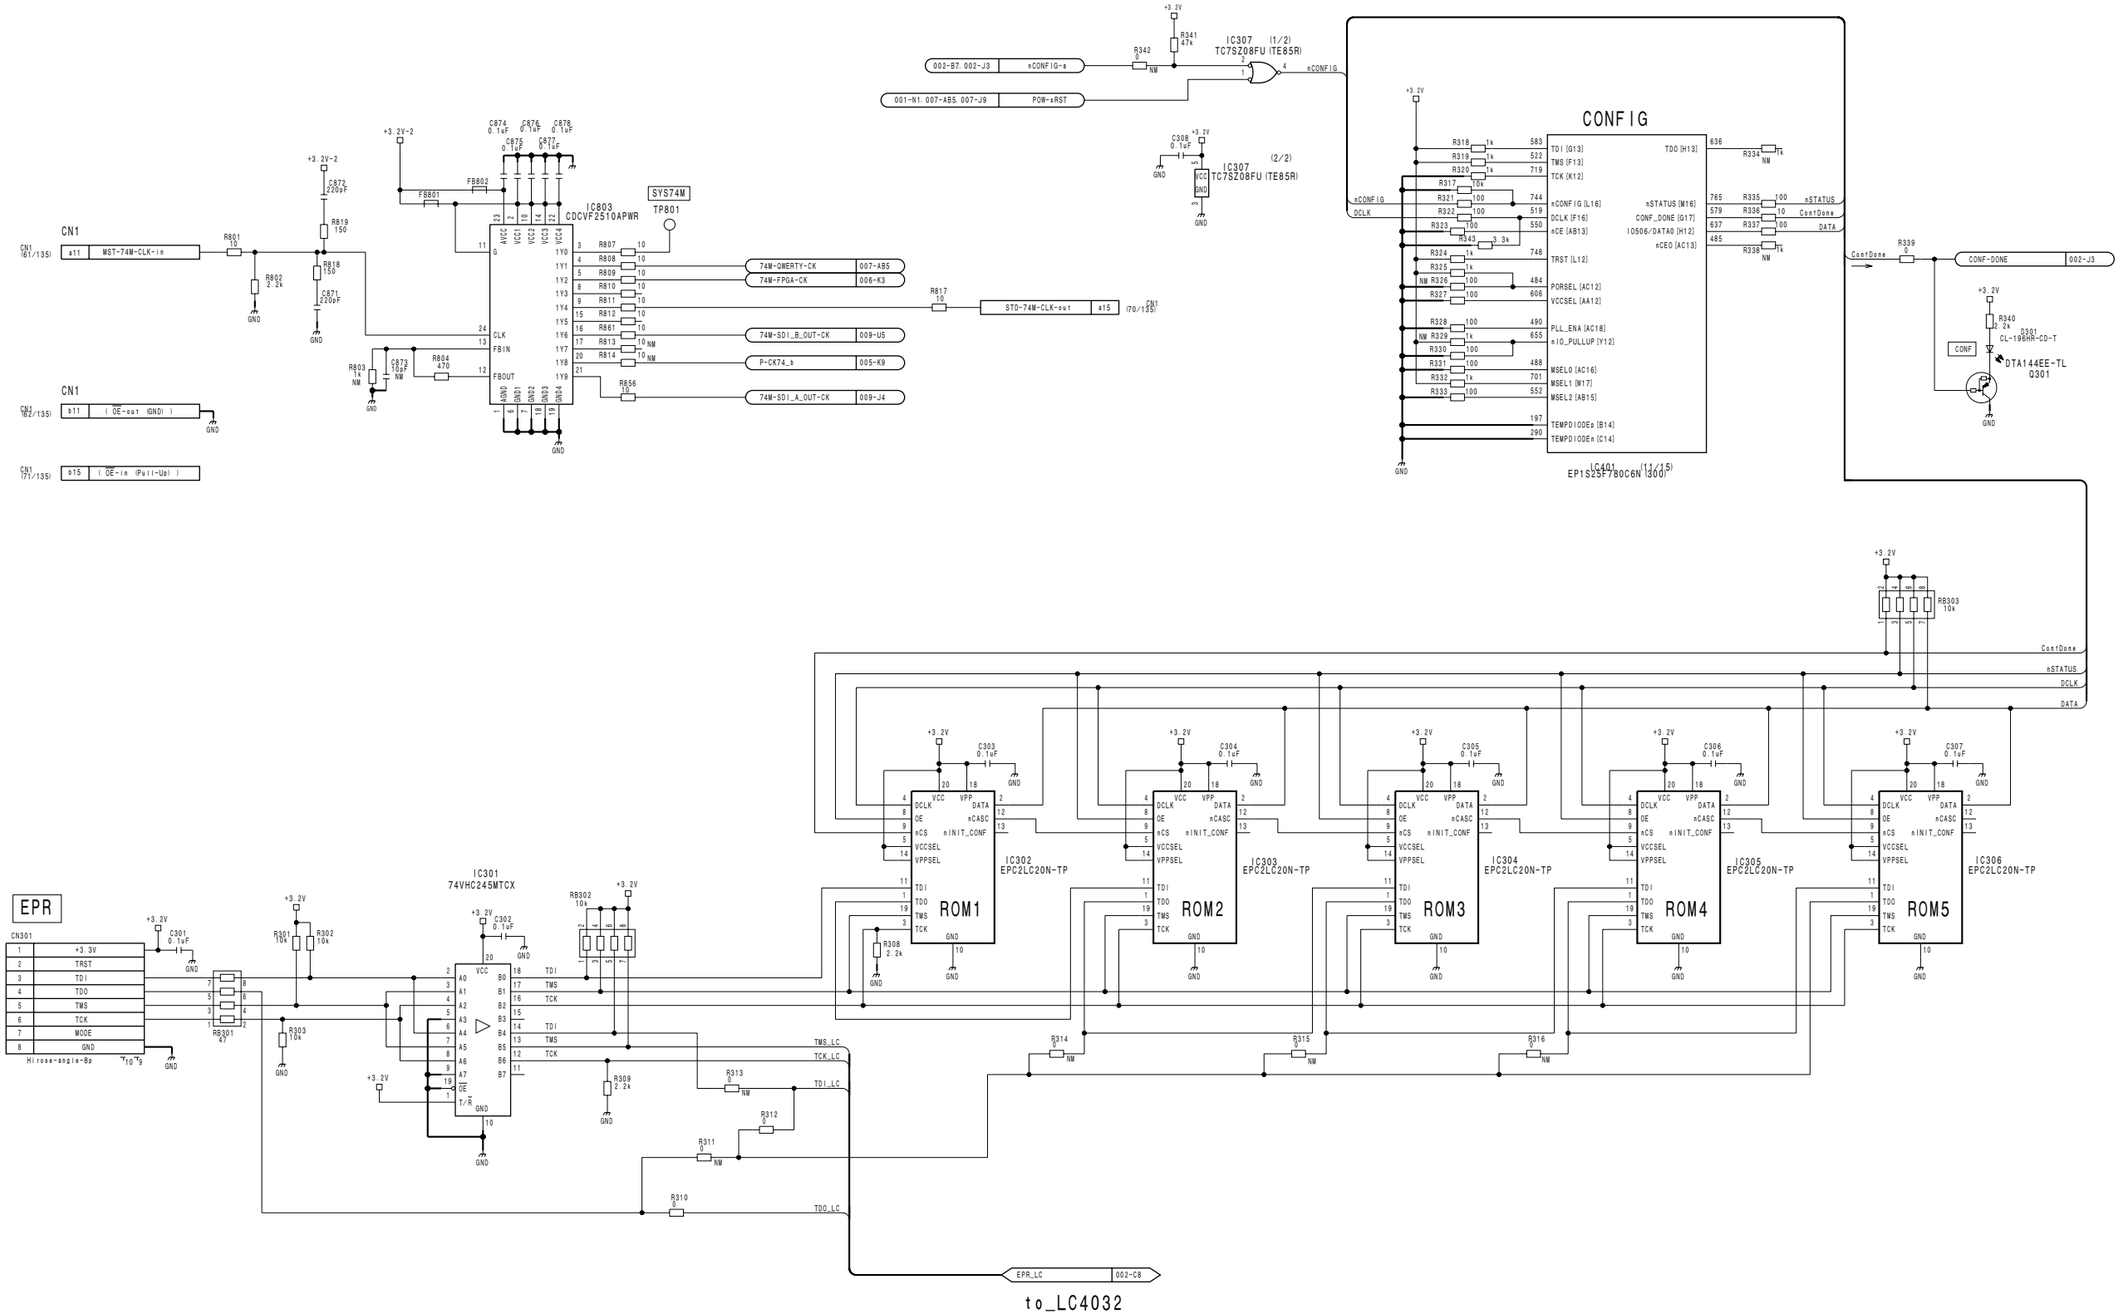

DPR-271A (4/9)
SUFFIX: -11

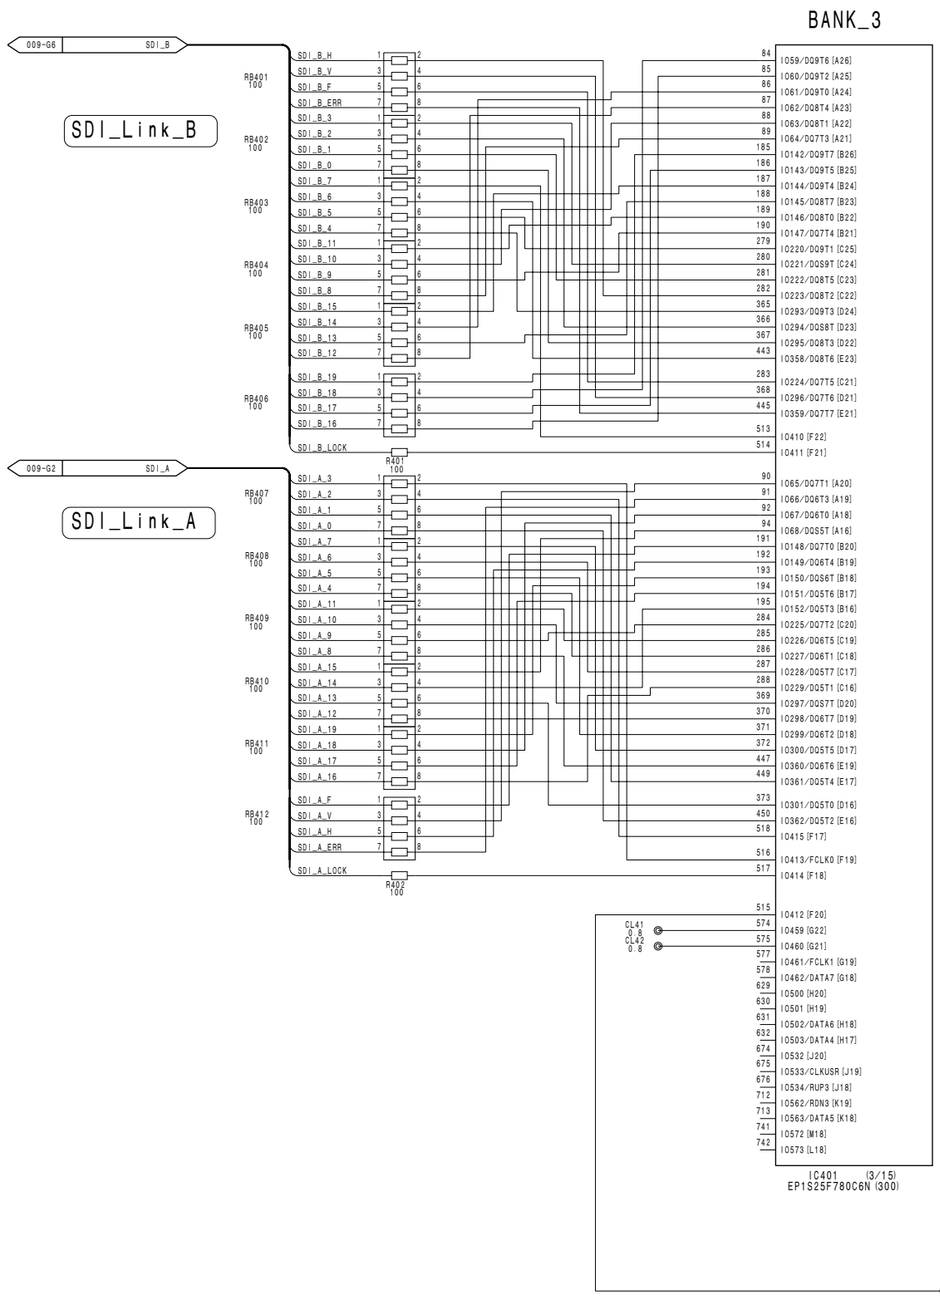


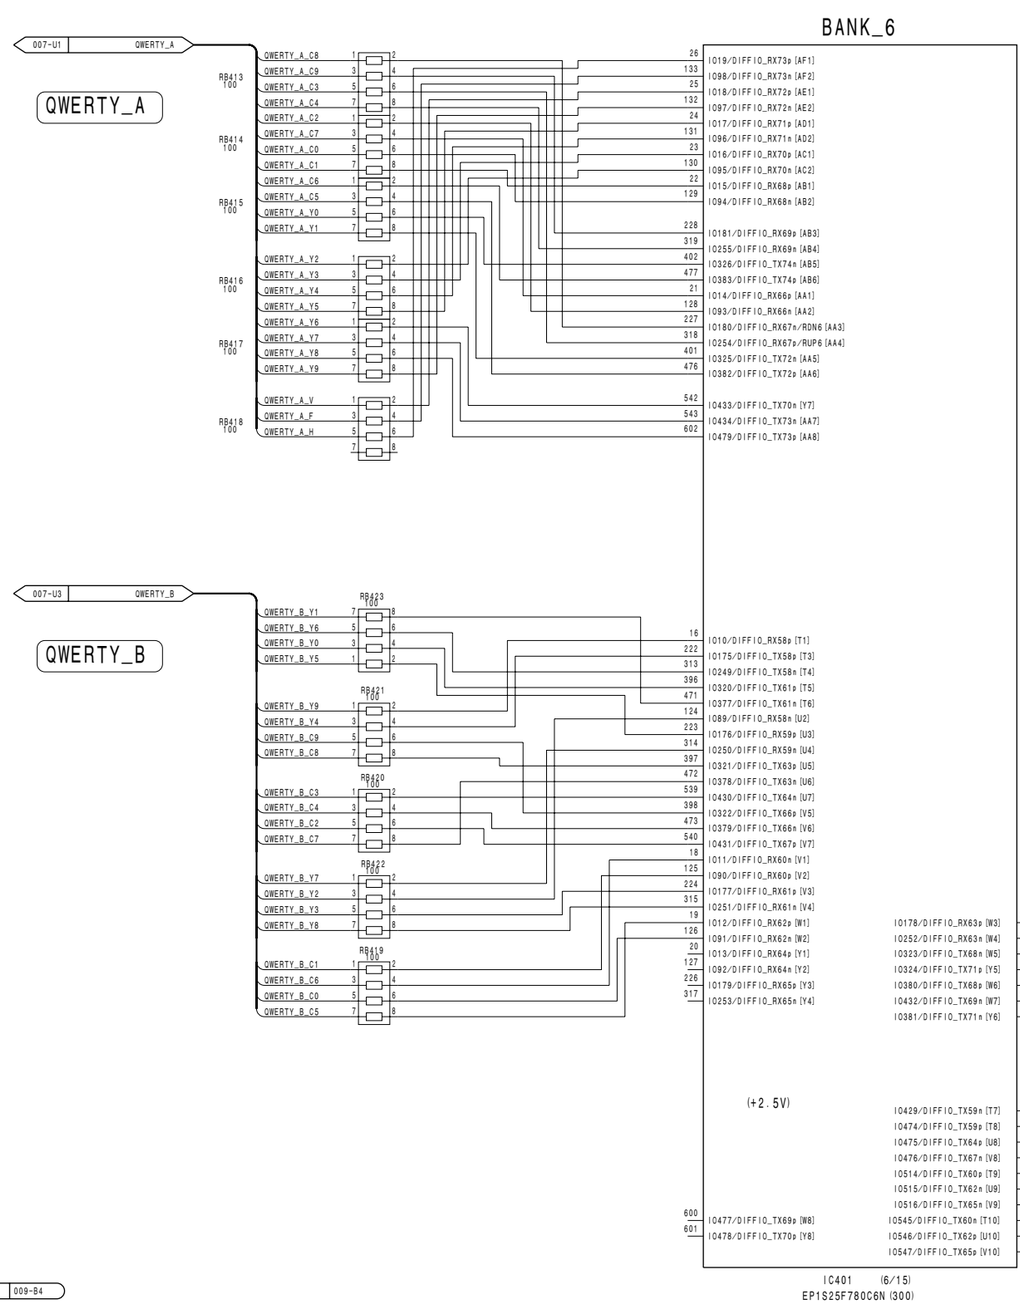



7-38

**DPR-271A (4/9)**
**SUFFIX: -11**

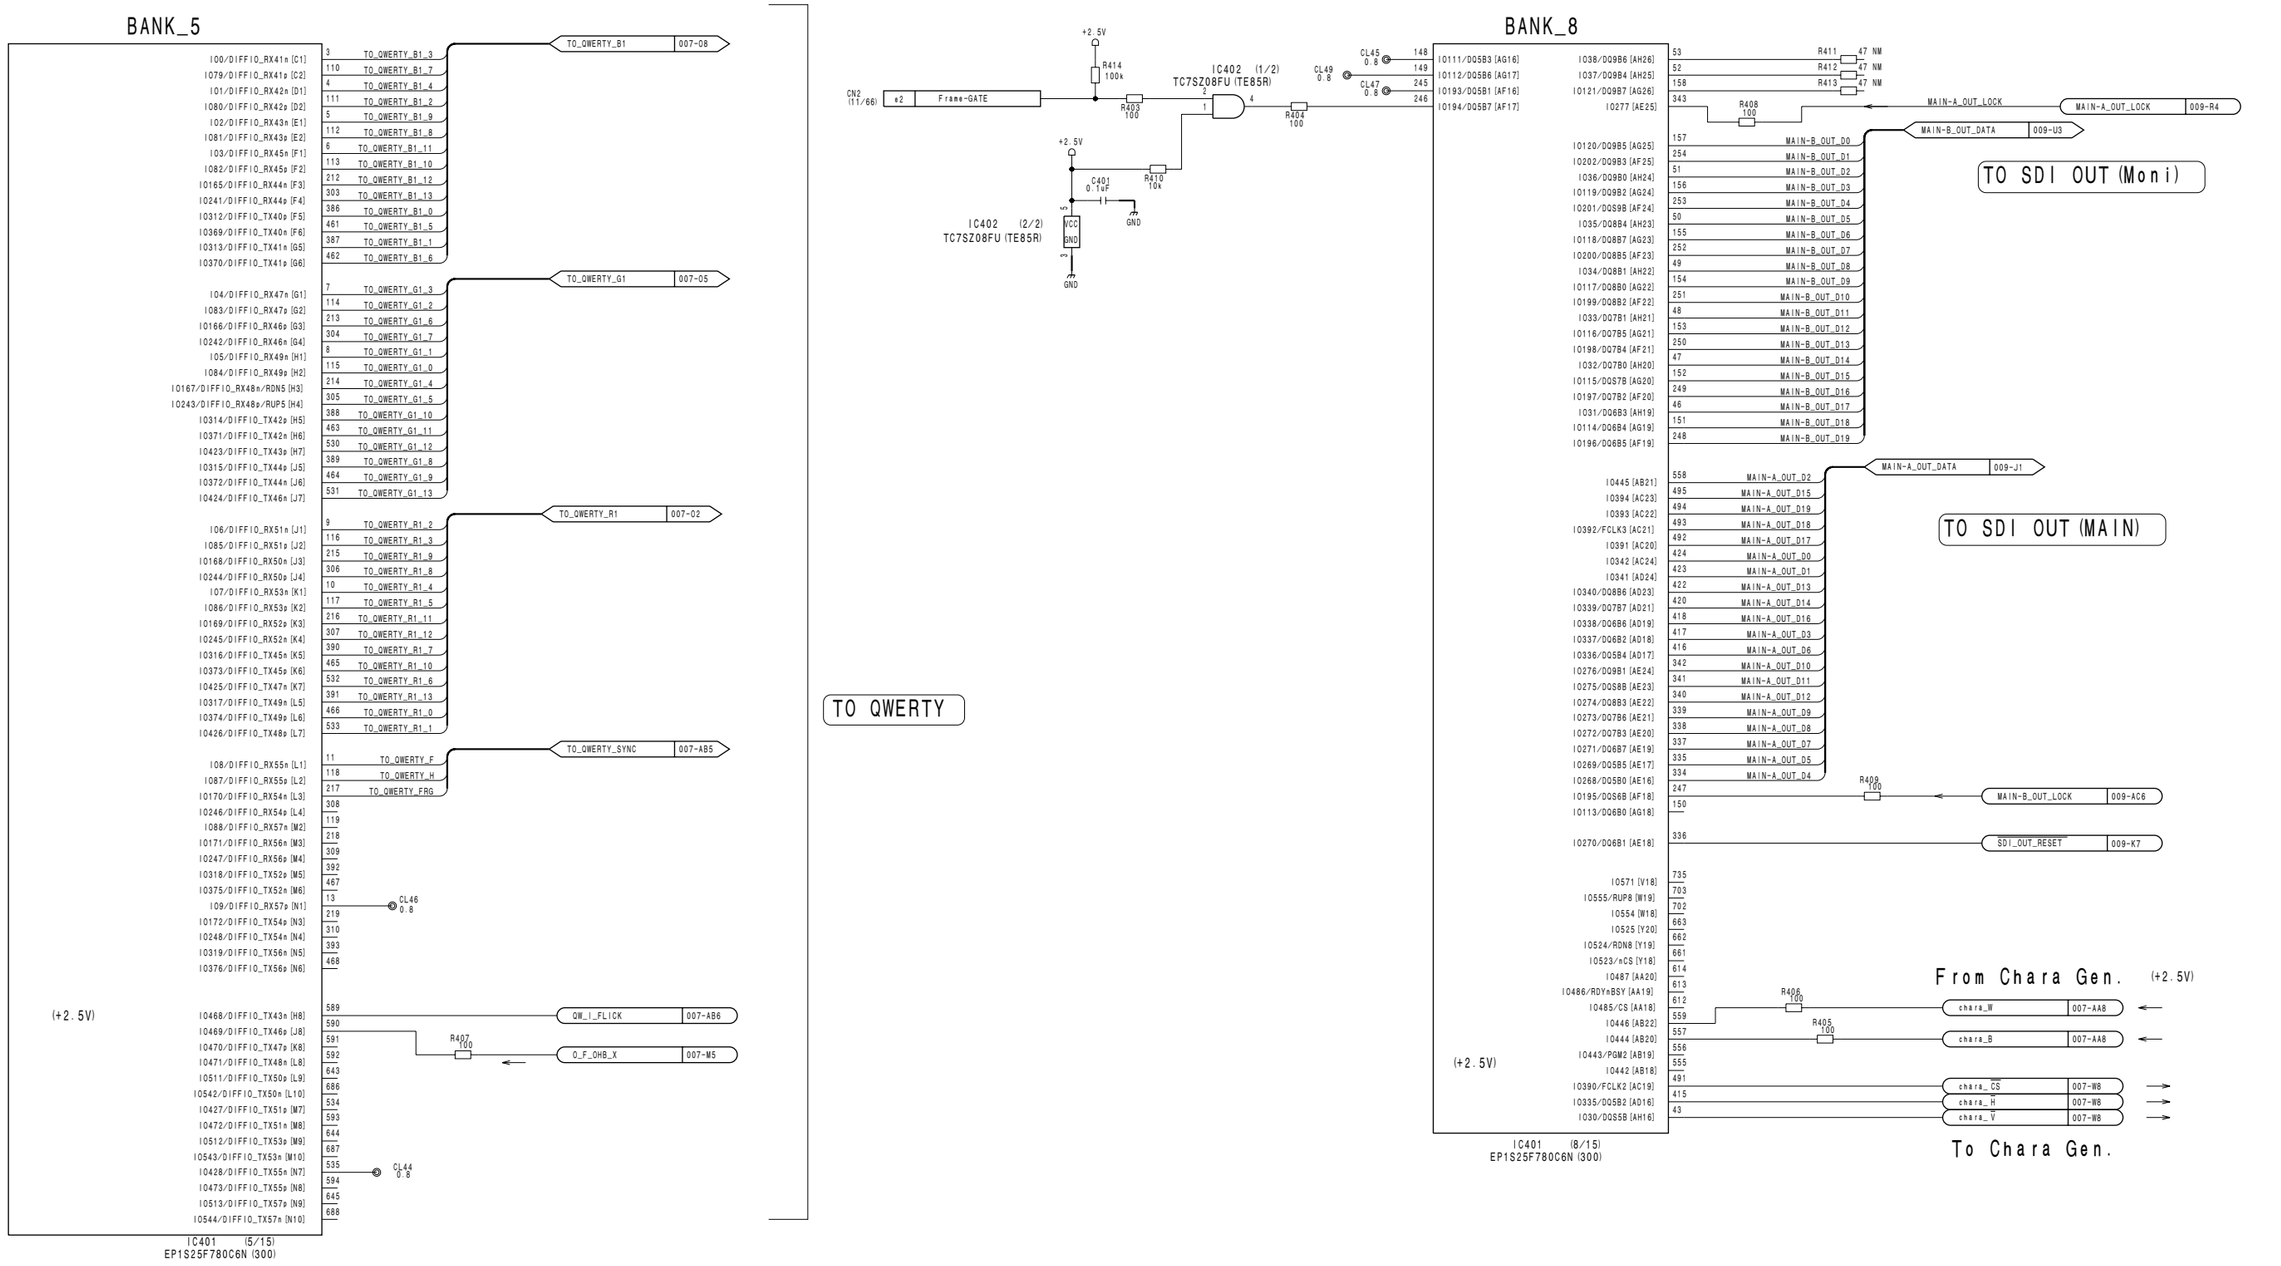

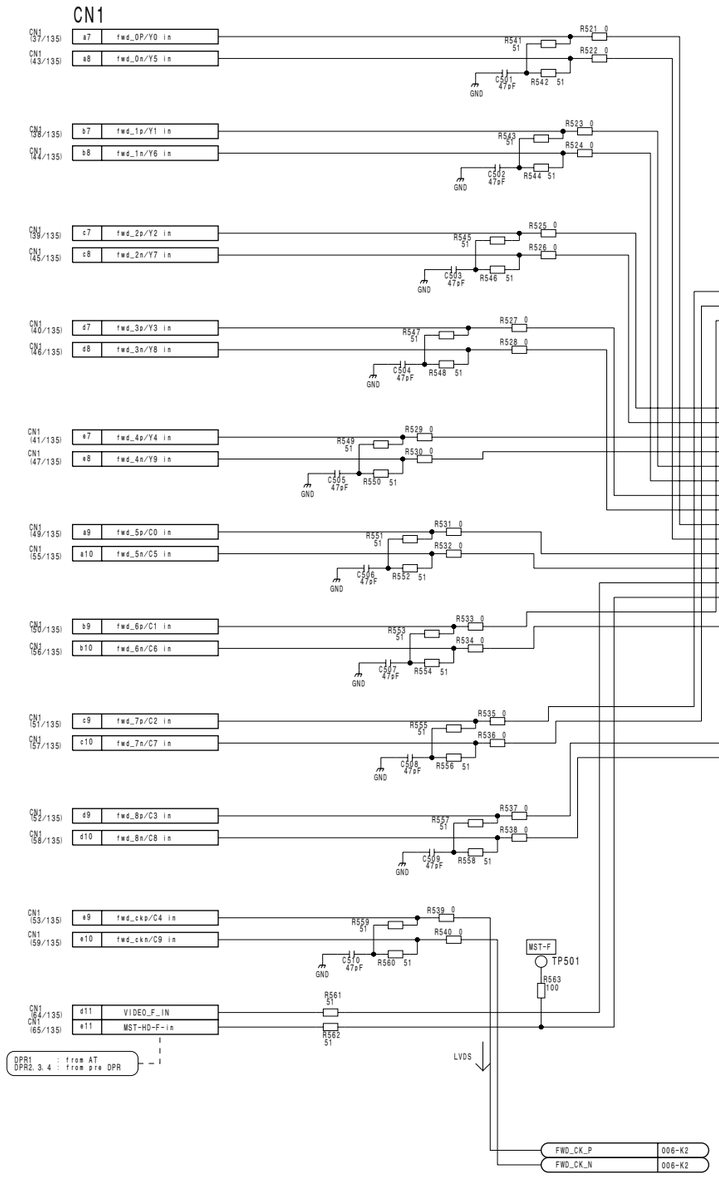


fwd in (LVDS)

fwd out (LVDS)

**DPR-271A (5/9)**
**SUFFIX: -11**

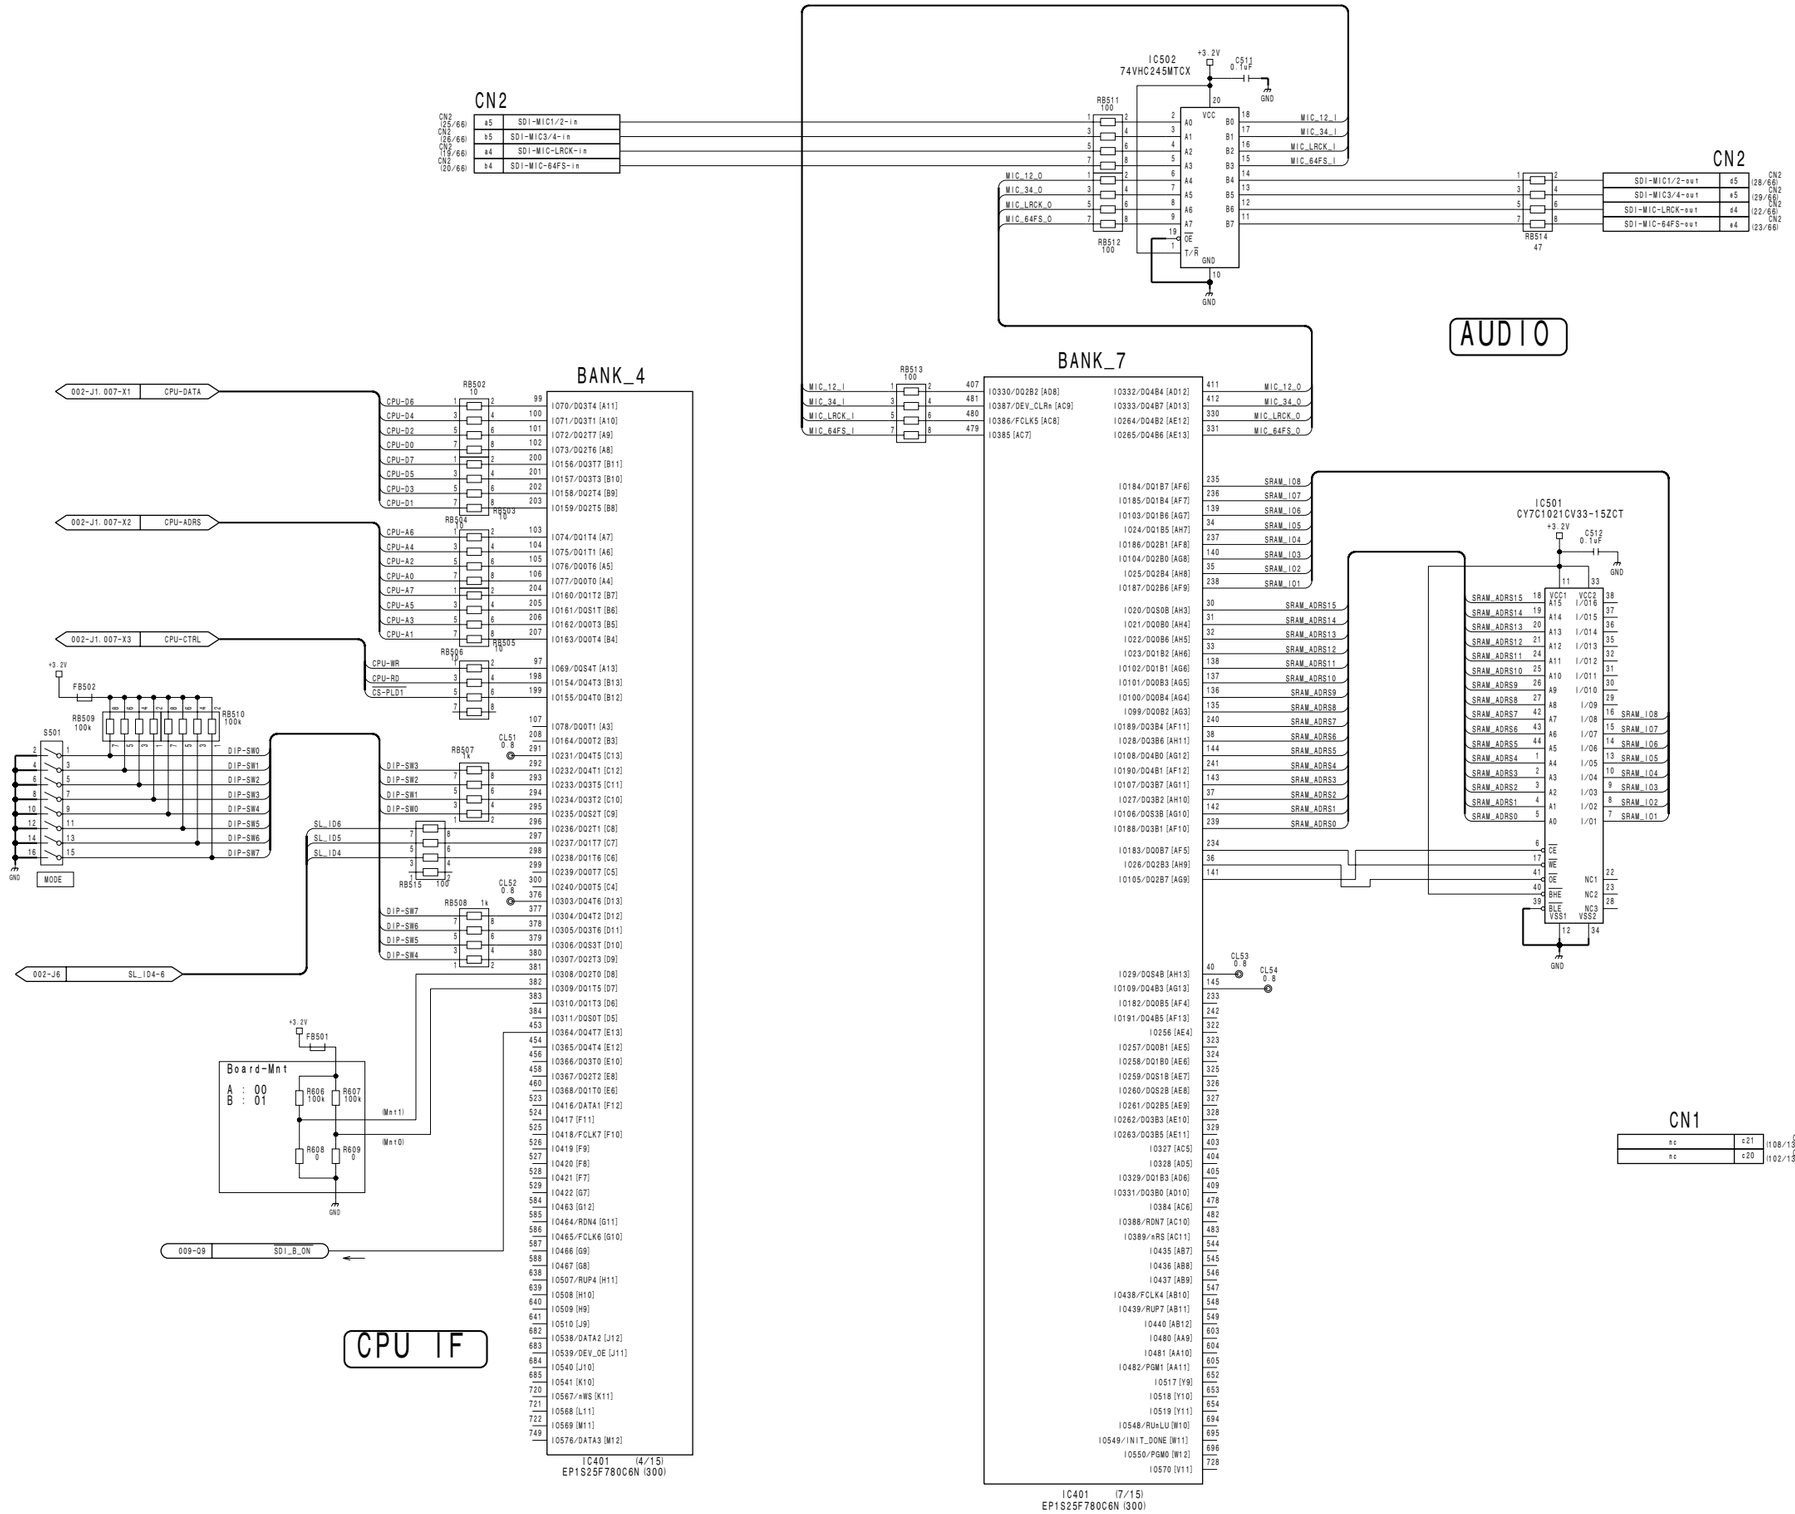


**DPR-271A (5/9)**
BOARD NO. 1-871-674-11
HDCU3300_DPR-271A_011_5

## GND

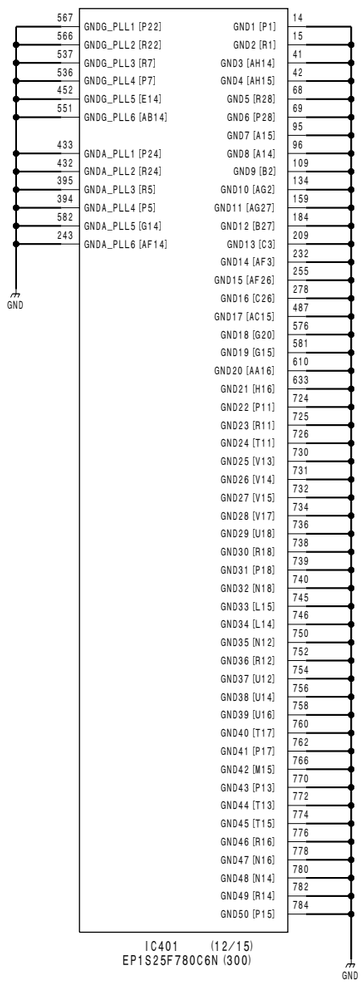


## NC




## VCC

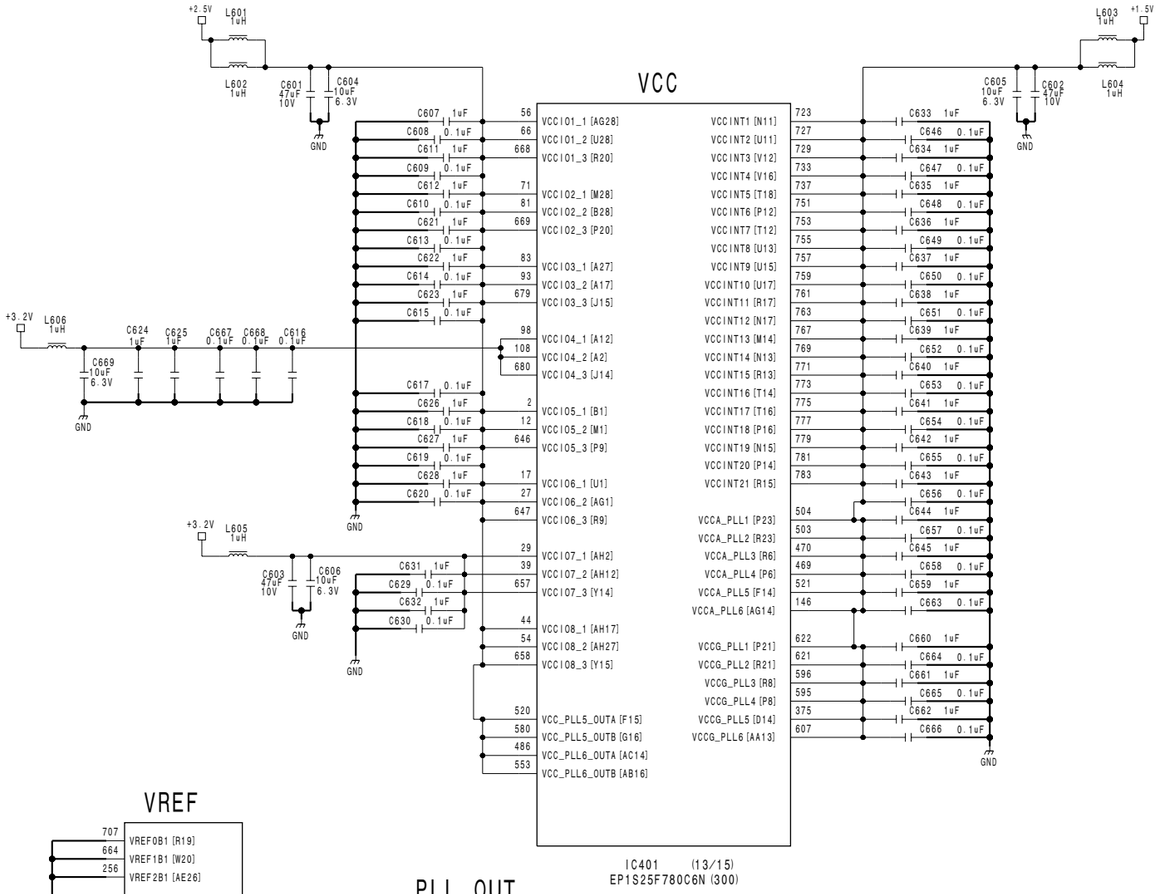


## VREF

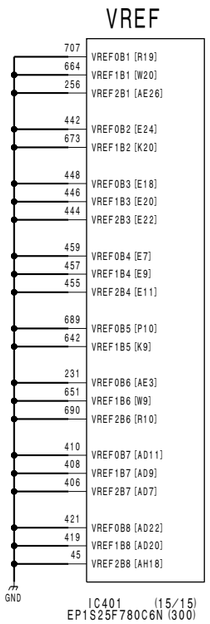


## PLL_OUT

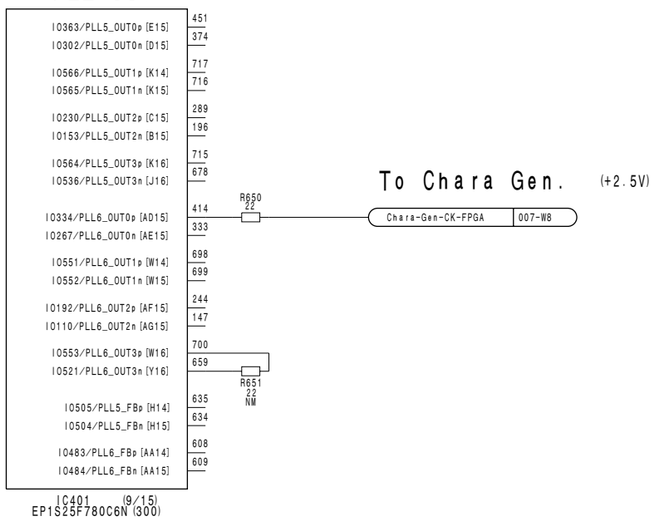


## To Chara Gen. (+2.5V)

Chara-Gen-CK-FPGA — 007-W8

## CLK

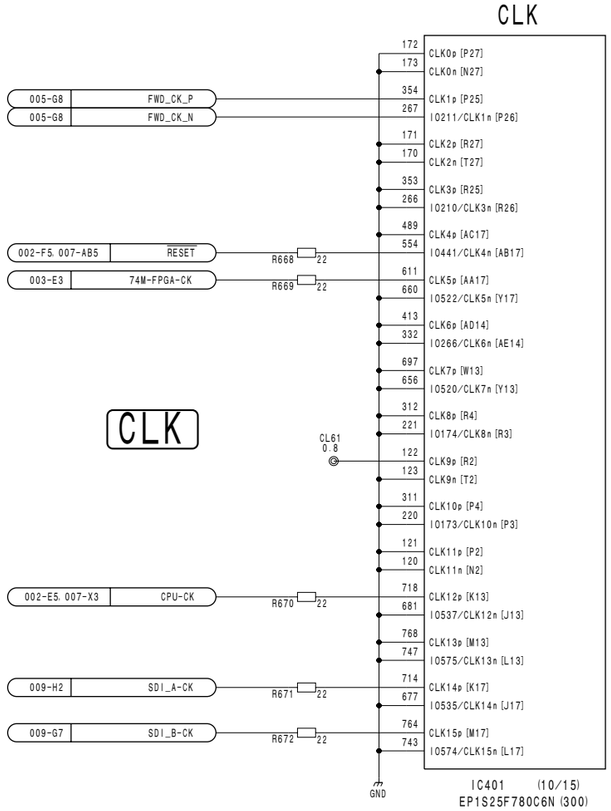


**DPR-271A (6/9)**
BOARD NO. 1-871-674-11
HDCU3300_DPR-271A_011_6

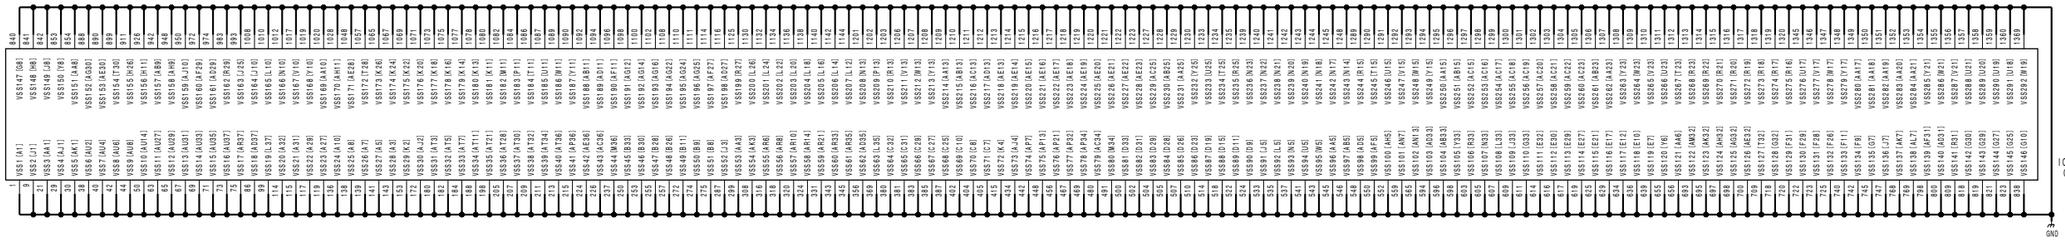
IC801 (16/19)
CXD9187GG-P
GND

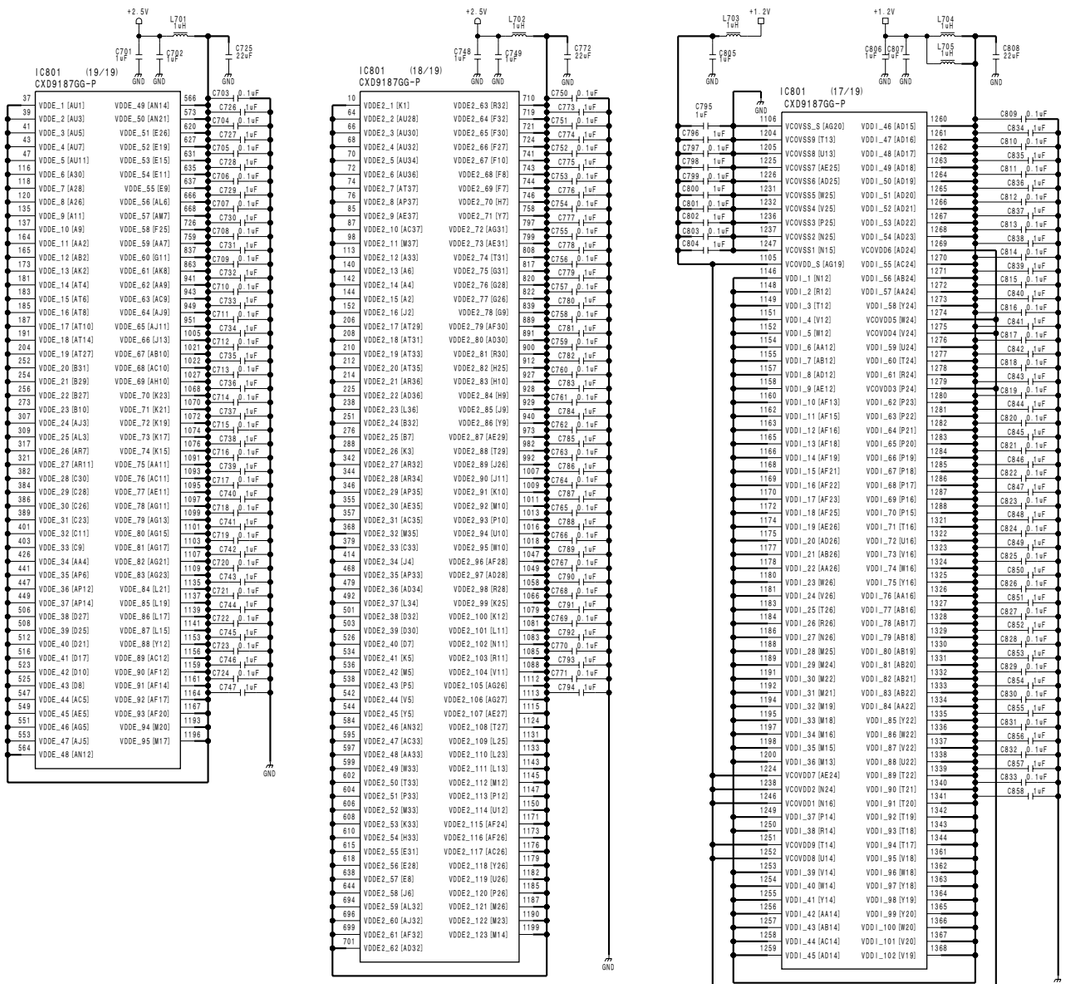
IC801 (19/19)
CXD9187GG-P
IC801 (18/19)
CXD9187GG-P
IC801 (17/19)
CXD9187GG-P
+2.5V
+1.2V
GND

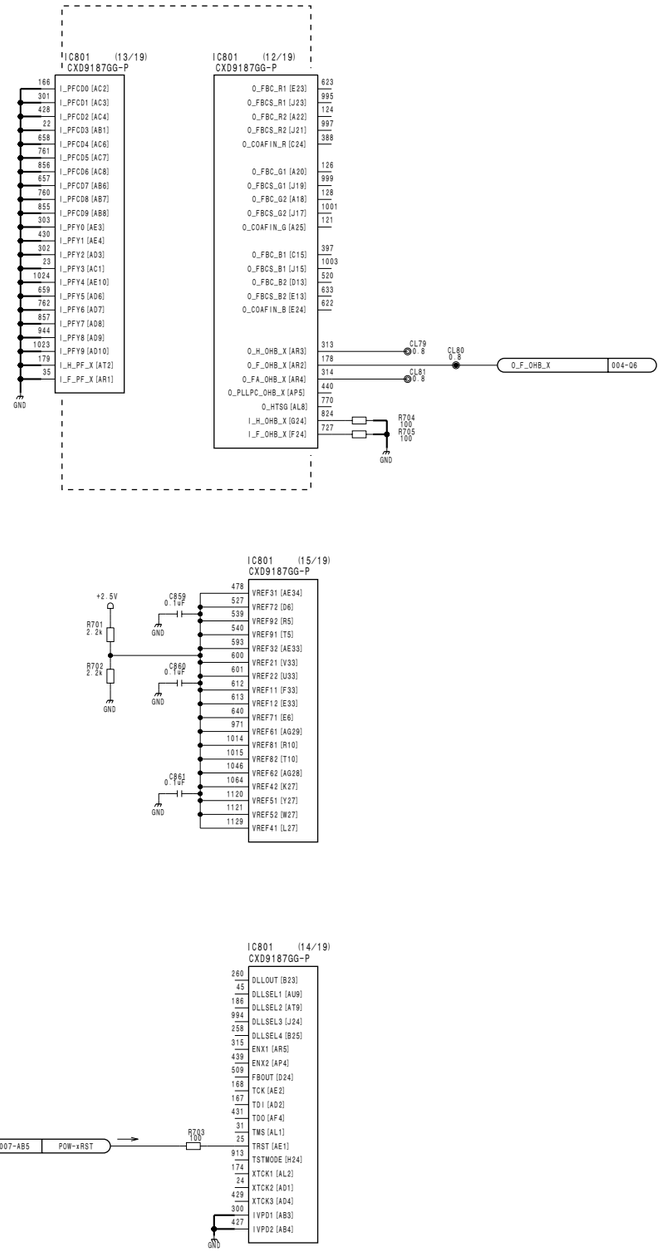
IC801 (13/19)
CXD9187GG-P
IC801 (12/19)
CXD9187GG-P
IC801 (15/19)
CXD9187GG-P
IC801 (14/19)
CXD9187GG-P
001-N1. 003-G2. 007-ABS
POW-xRST
GND

**DPR-271A (7/9)** **SUFFIX: -11**

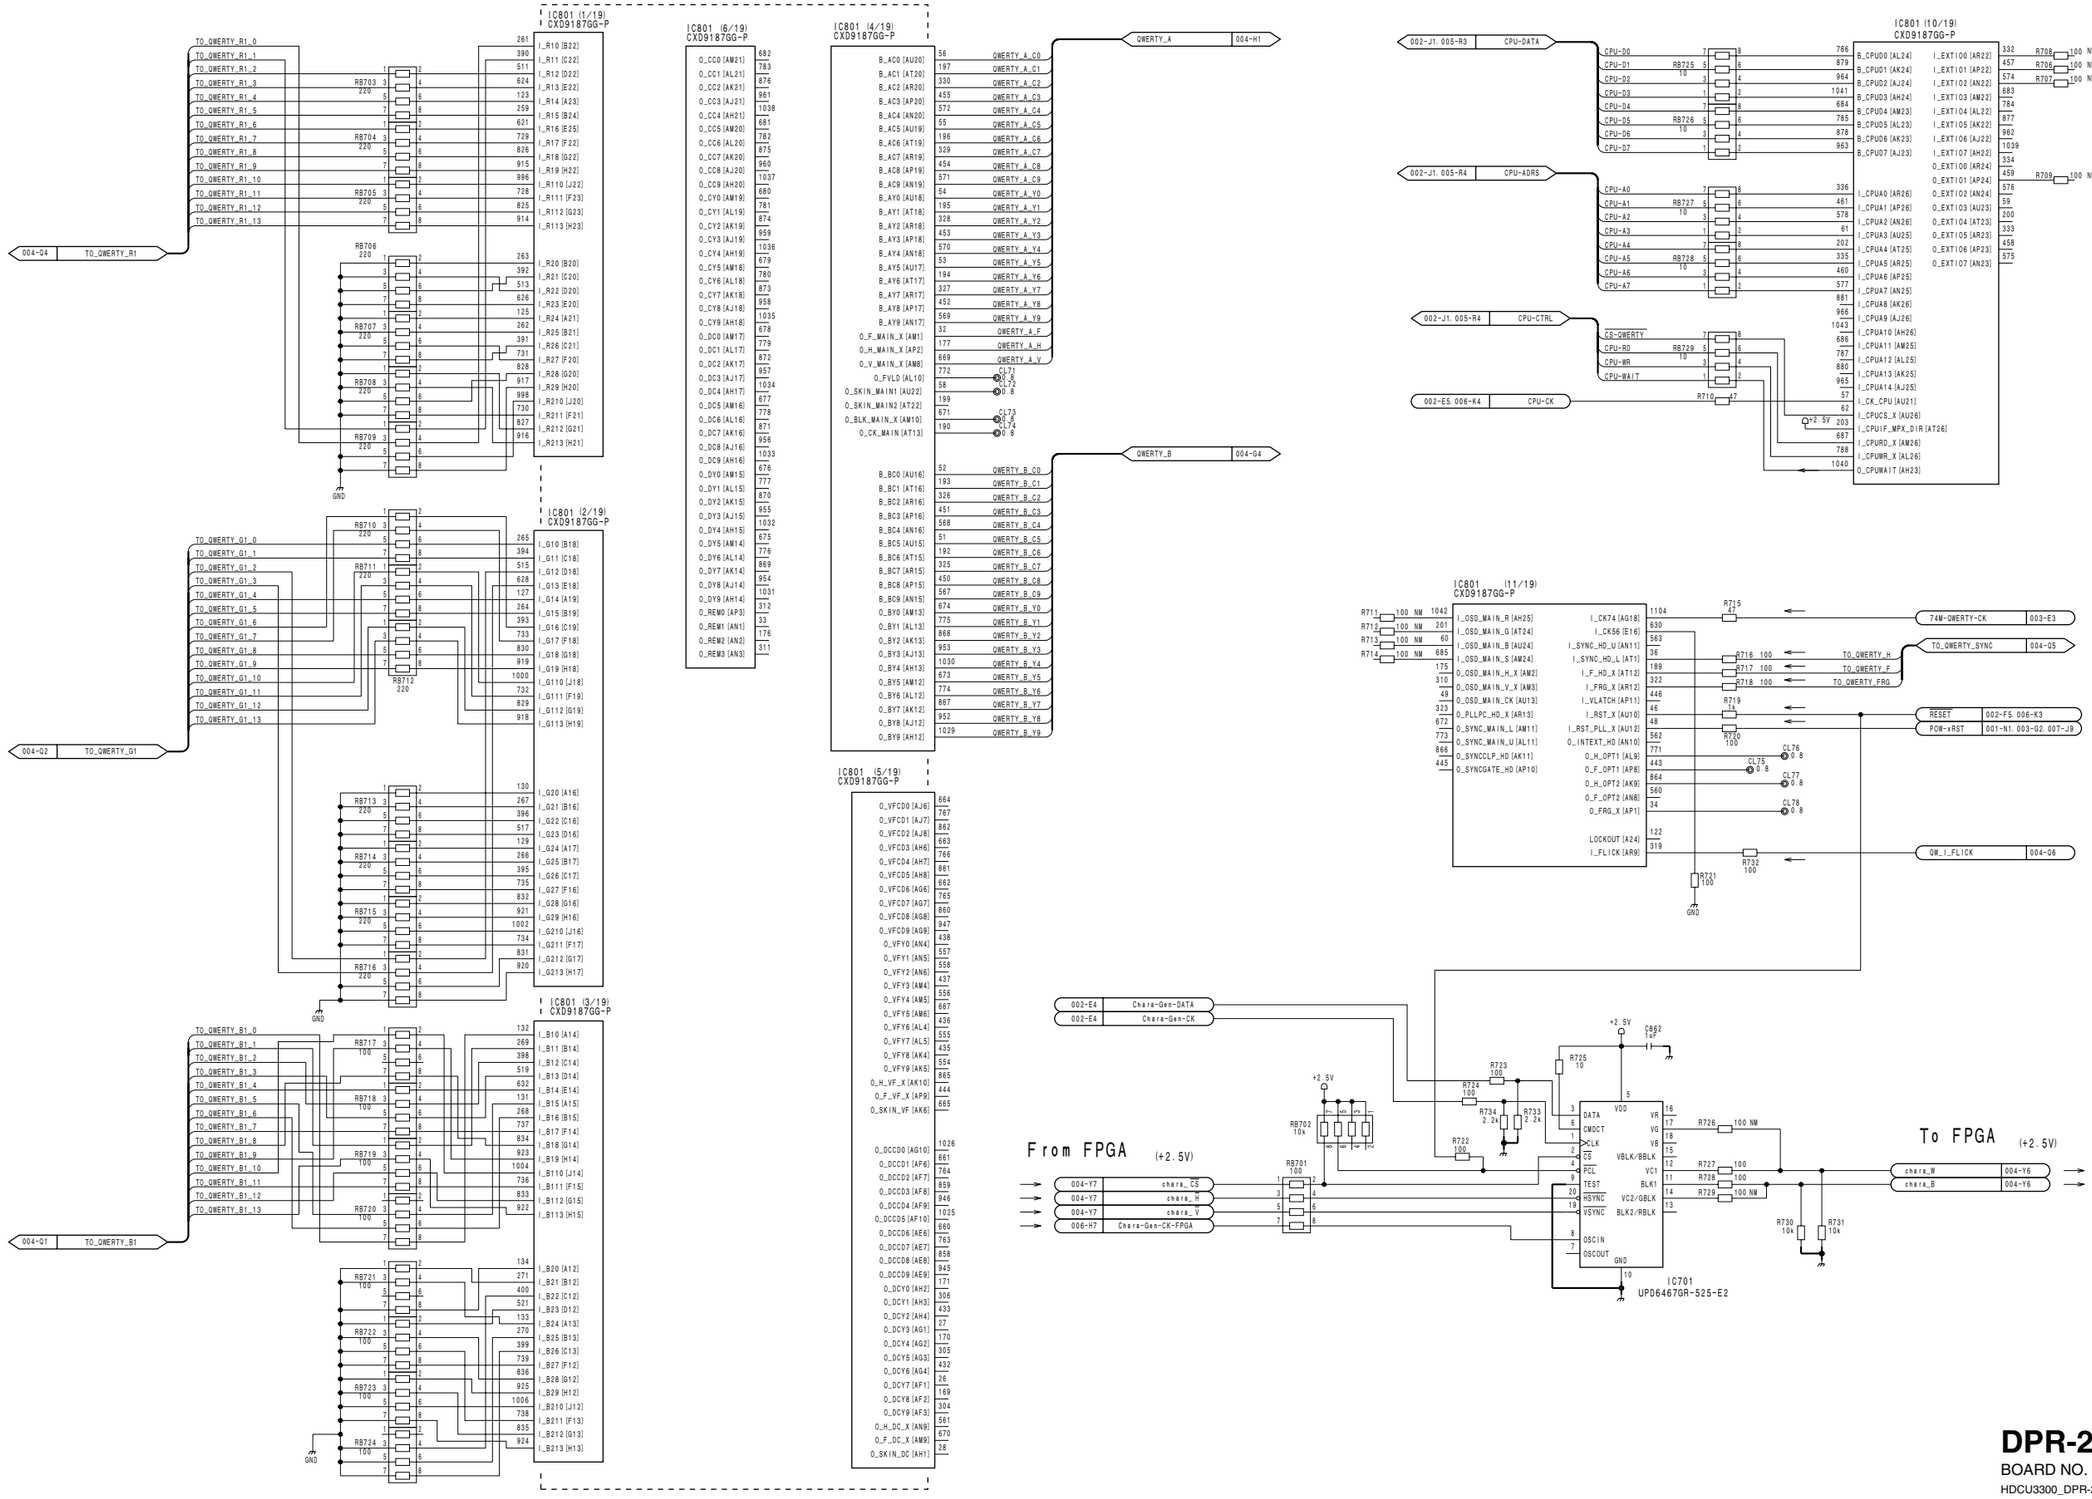


**DPR-271A (7/9)**
BOARD NO. 1-871-674-11
HDCU3300_DPR-271A_011_7

DPR-271A (8/9)
SUFFIX: -11

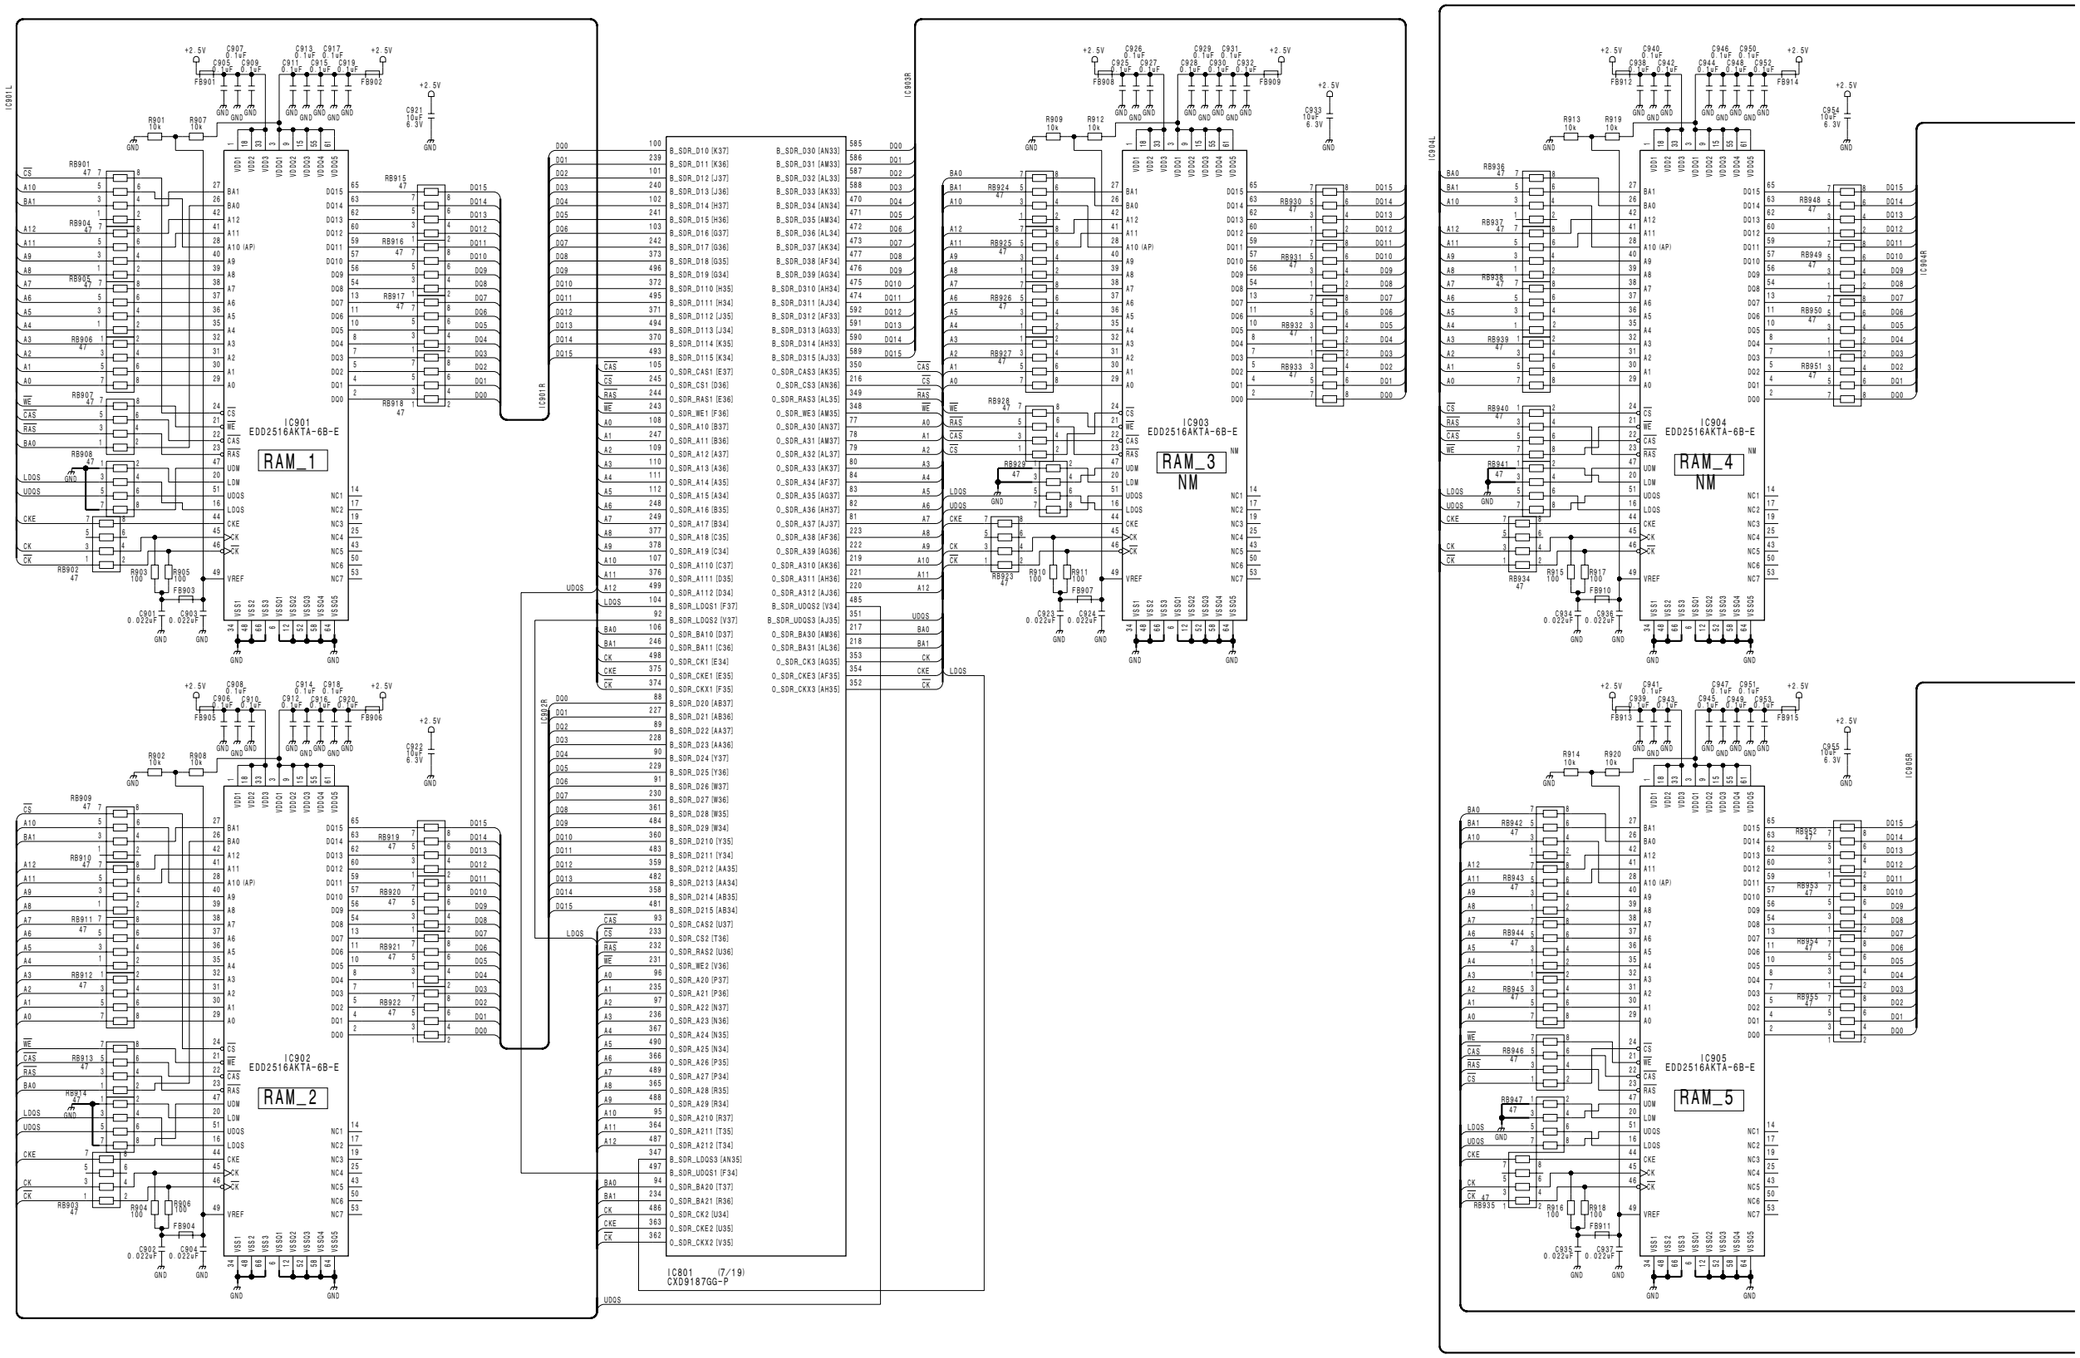



7-46

# DPR-271A (8/9)

SUFFIX: -11

DPR-271A (8/9)

SUFFIX: -11

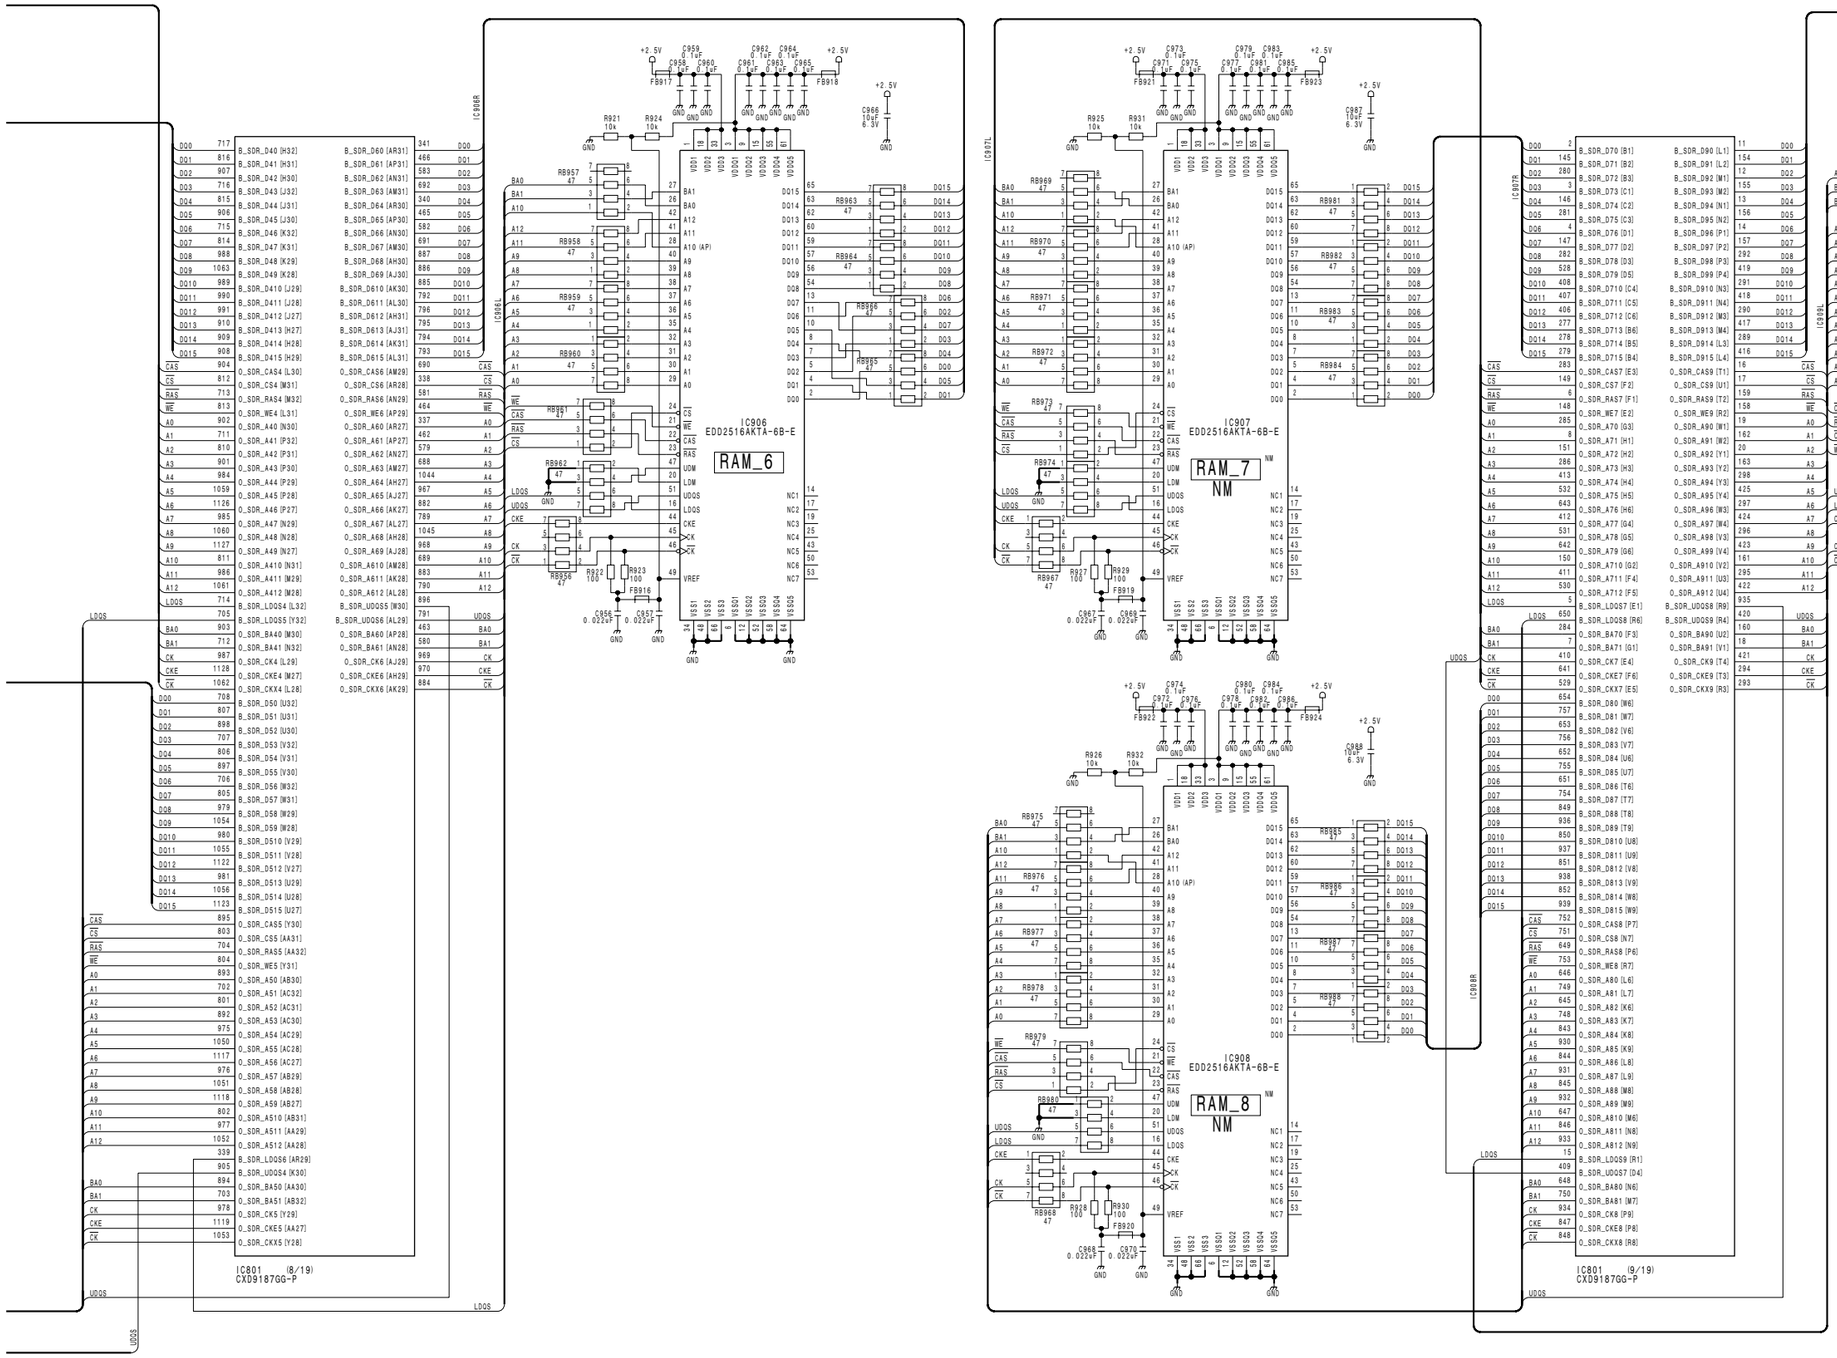

SDI-A_IN

SDI-B_IN

SDI_A-OUT

From SDP CN1

From SDP CN1

IC1001 GS1561-CFE3

IC1002 GS1561-CFE3

IC1003 GS1531-CBE2

CN1 (N.C.)

| | | |
|---|---|---|
| CN7 (1/135) | d1 | (NC) |
| CN7 (5/135) | e1 | (NC) |
| CN7 (9/135) | b2 | (NC) |
| CN7 (13/135) | c2 | (NC) |
| CN3 (15/135) | d2 | (NC) |
| CN7 (11/135) | e2 | (NC) |
| CN3 (13/135) | a3 | (NC) |
| CN2 (9/135) | b3 | (NC) |
| CN2 (5/135) | c3 | (NC) |
| CN3 (11/135) | b4 | (NC) |
| CN7 (7/135) | c4 | (NC) |
| CN2 (1/135) | b5 | (NC) |
| CN3 (27/135) | c5 | (NC) |

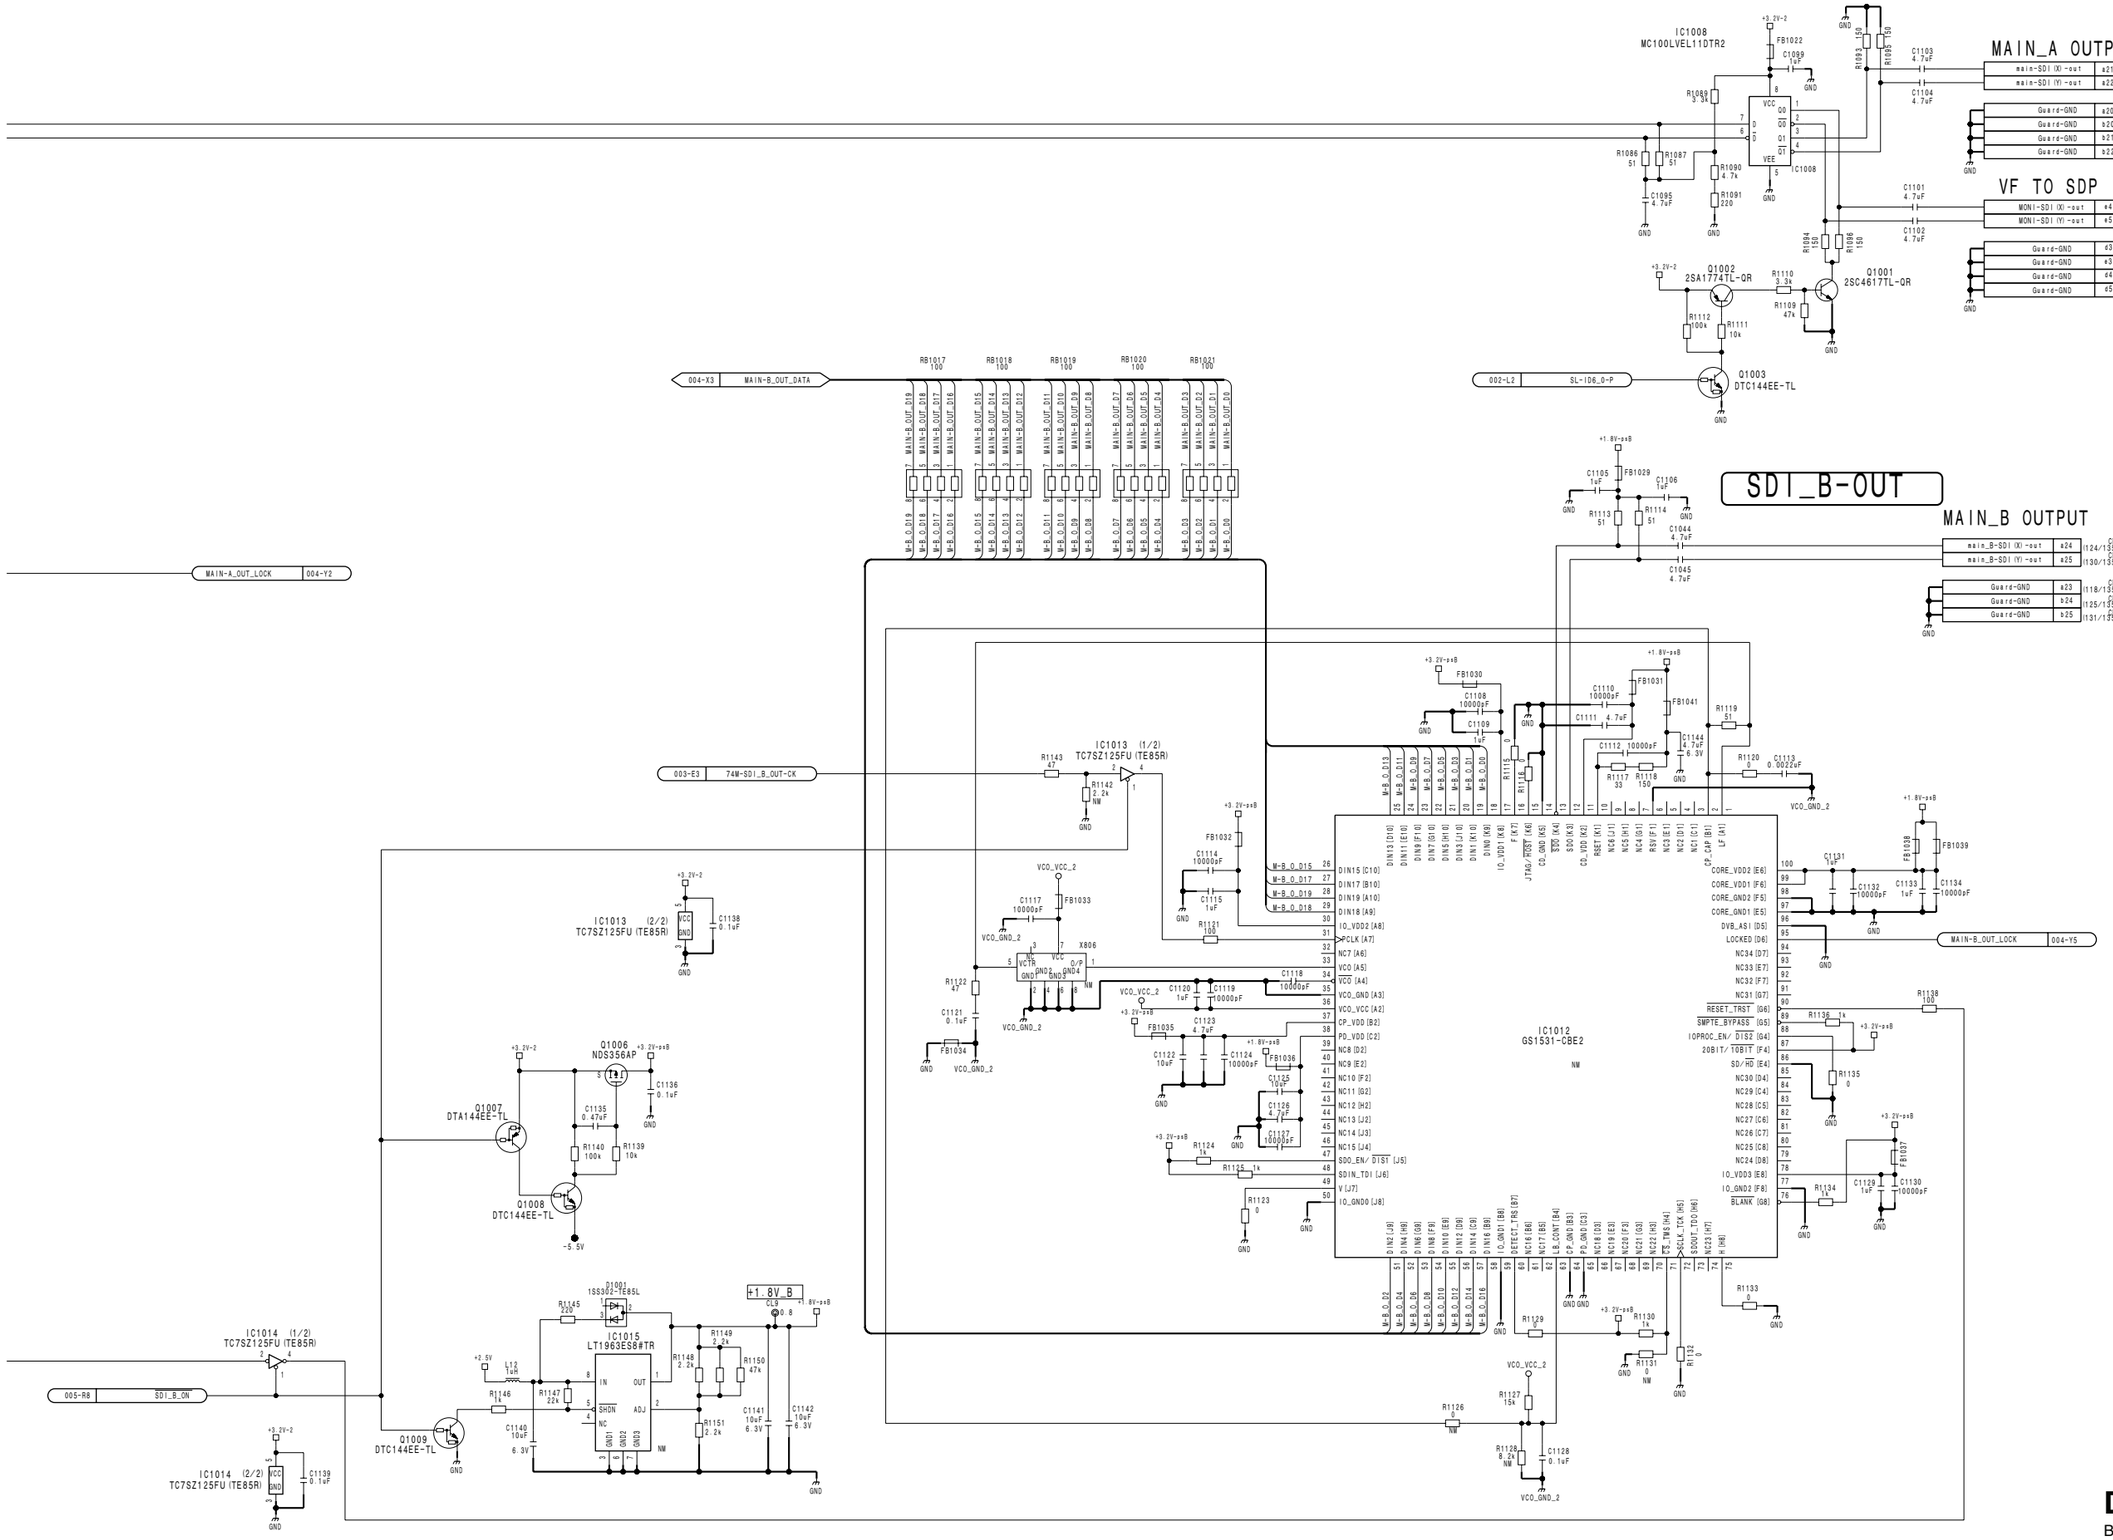




**DPR-271A (9/9)**
BOARD NO. 1-871-674-11
HDCU3300_DPR-271A_011_9

**DPR-271B (1/9)**
**SUFFIX: -11**

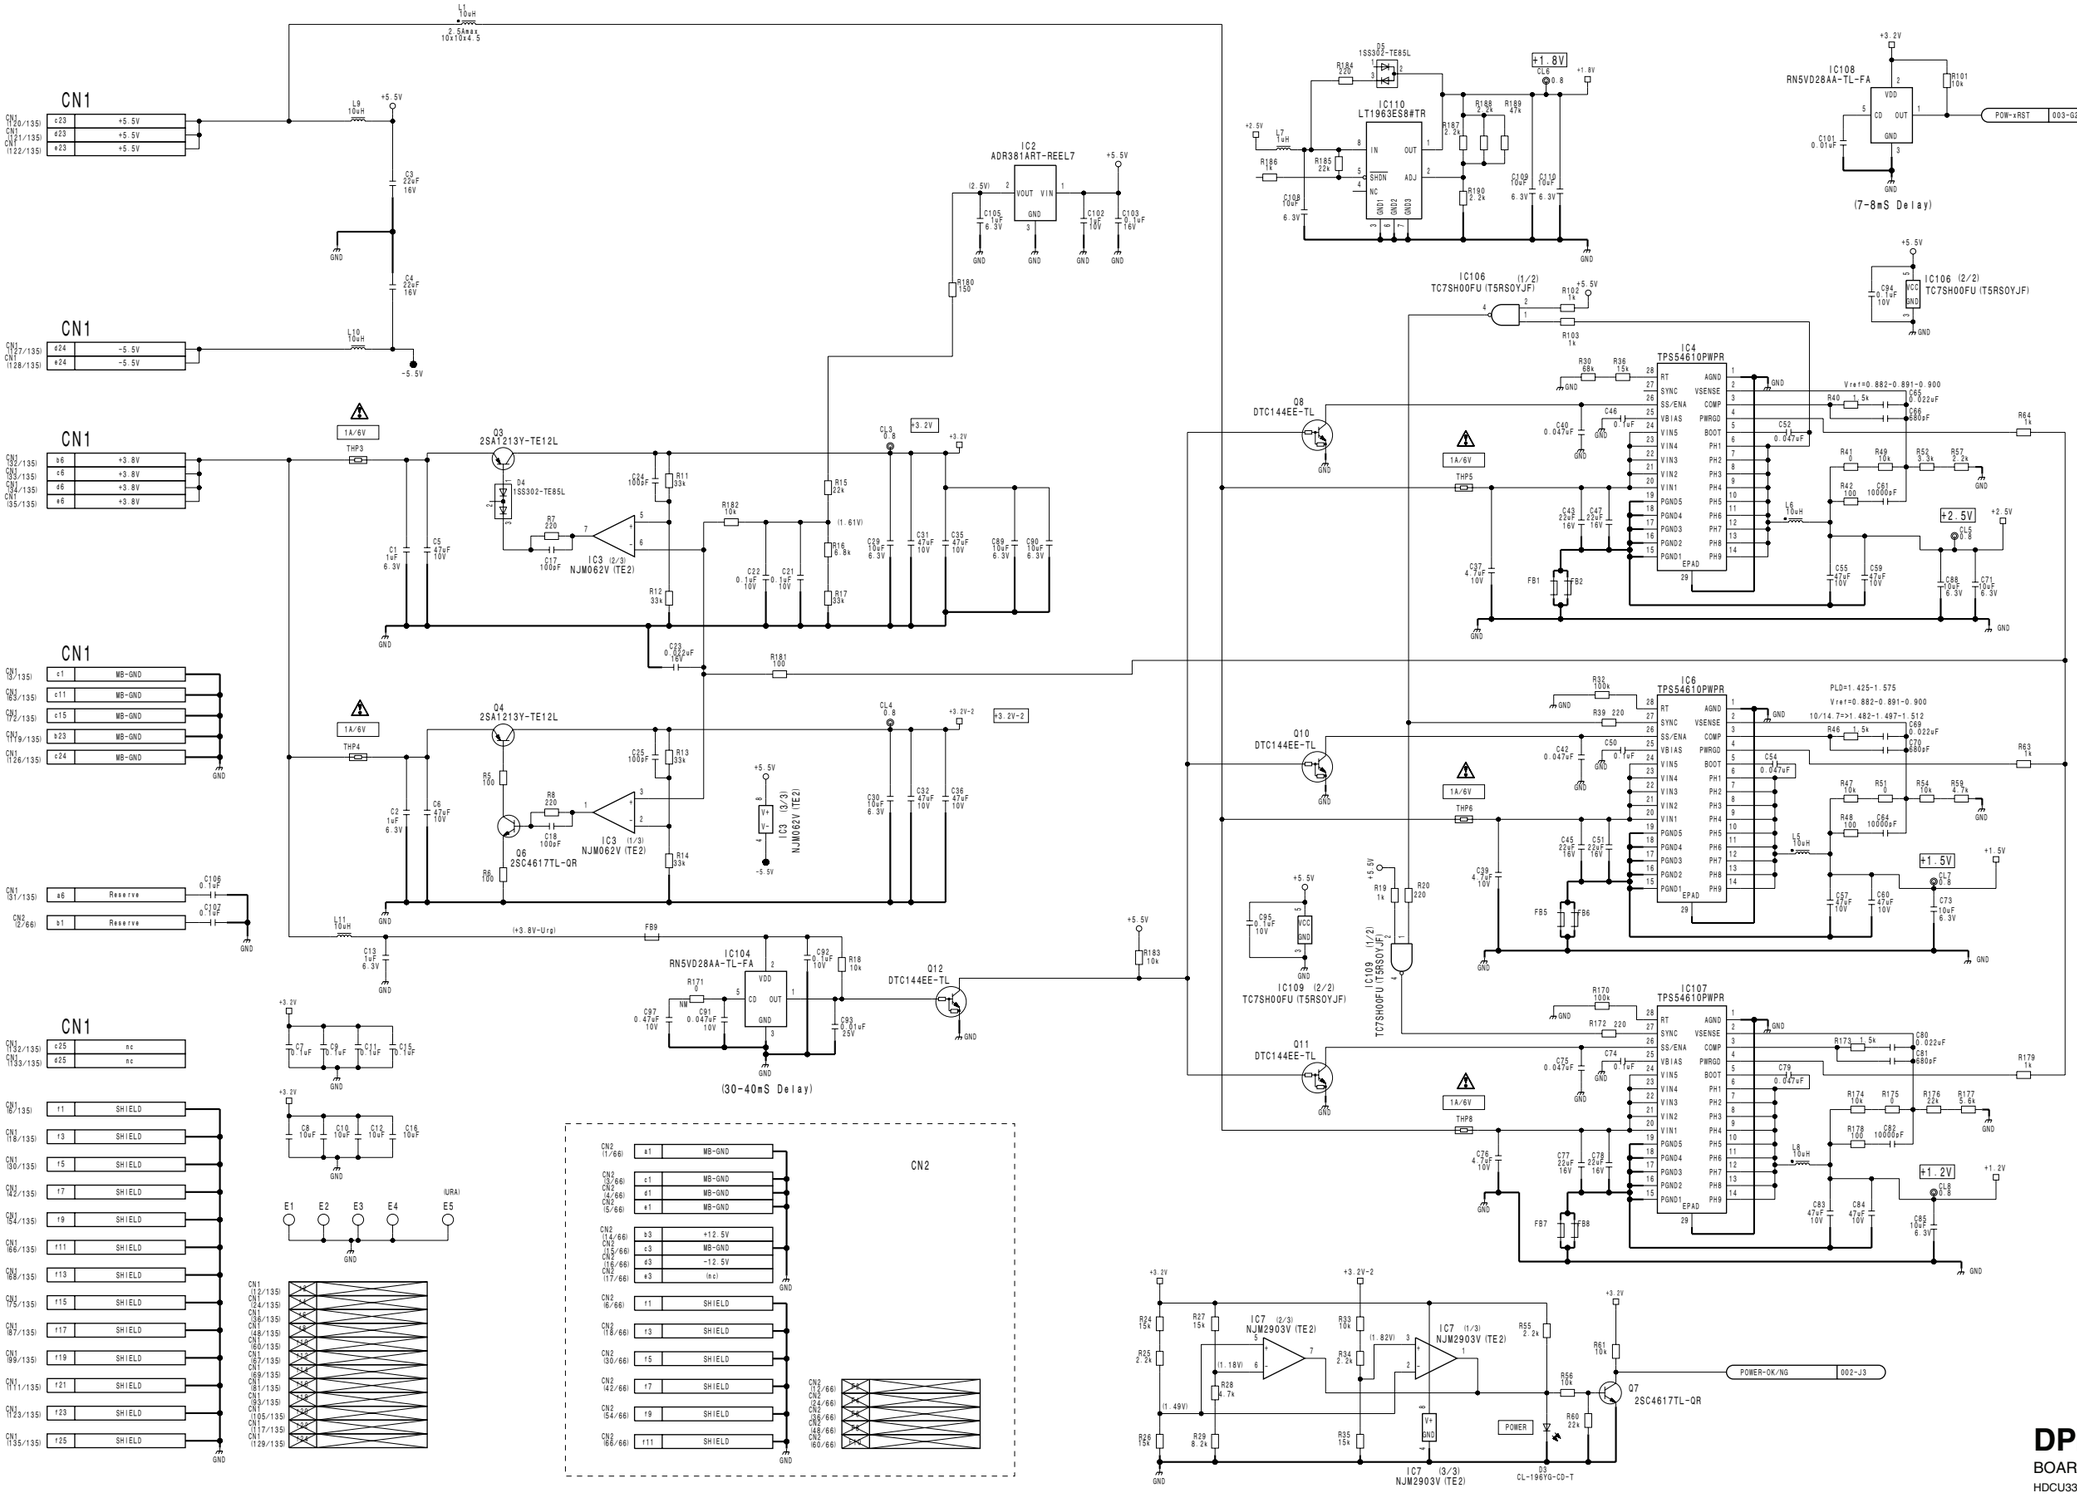


**DPR-271B (1/9)**
BOARD NO. 1-871-674-11
HDCU3300_DPR-271B_011_1

# DPR-271B (2/9)
**SUFFIX: -11**

DPR-271B (2/9)
SUFFIX: -11

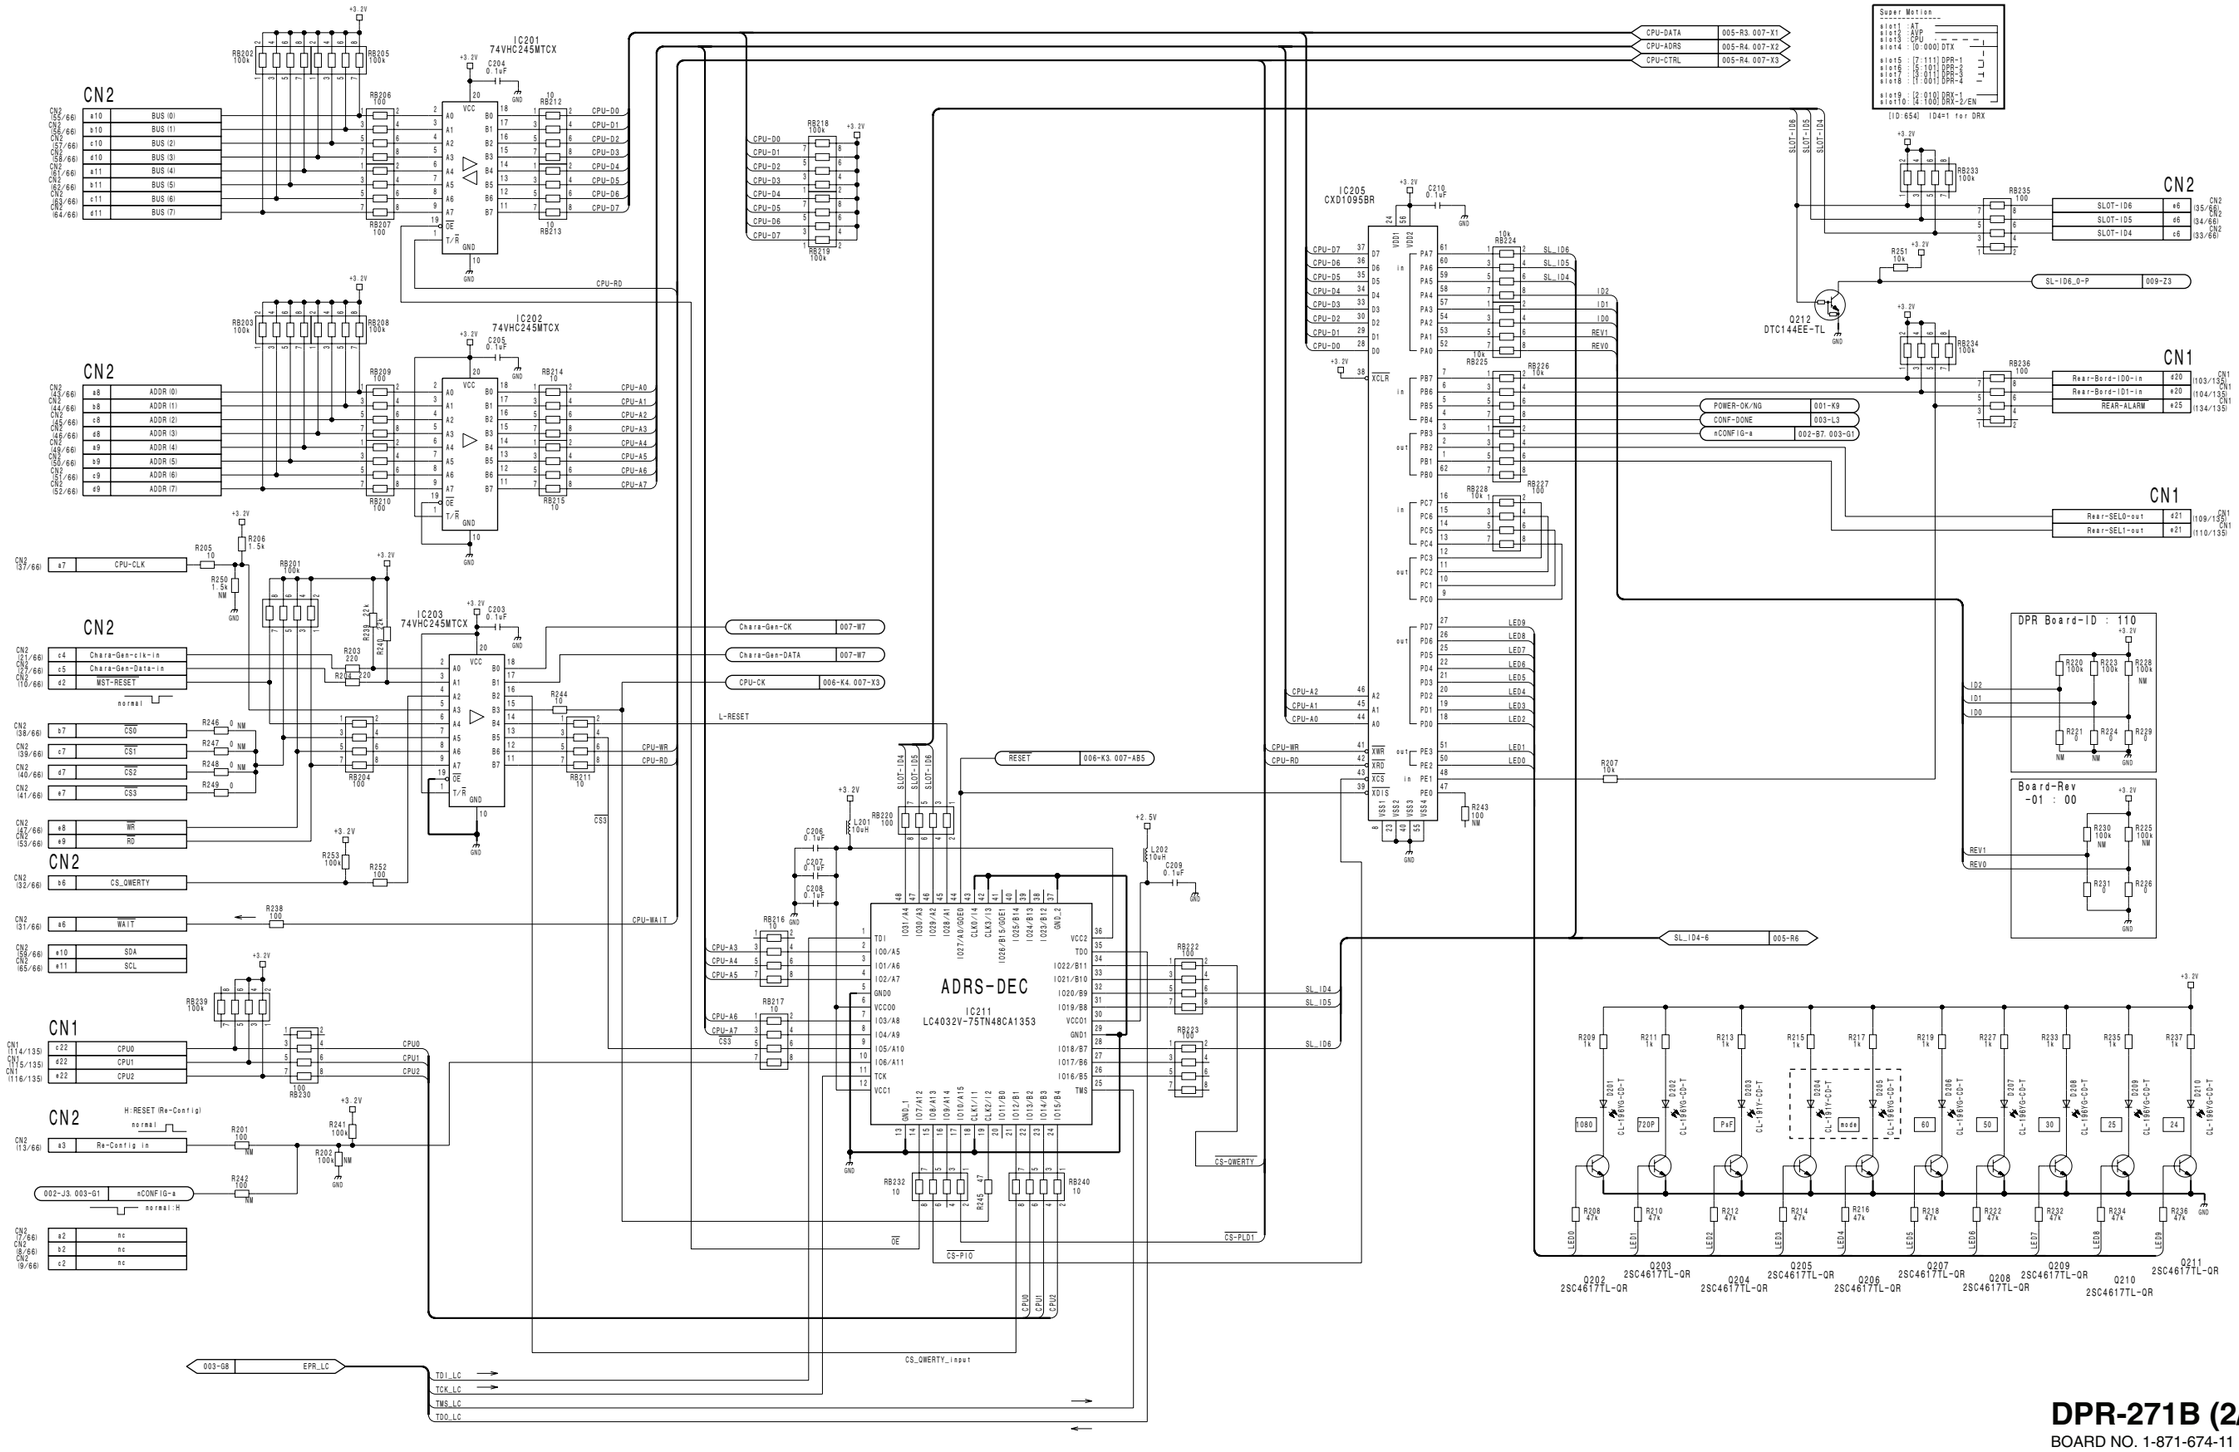


# DPR-271B (2/9)
BOARD NO. 1-871-674-11
HDCU3300_DPR-271B_011_2

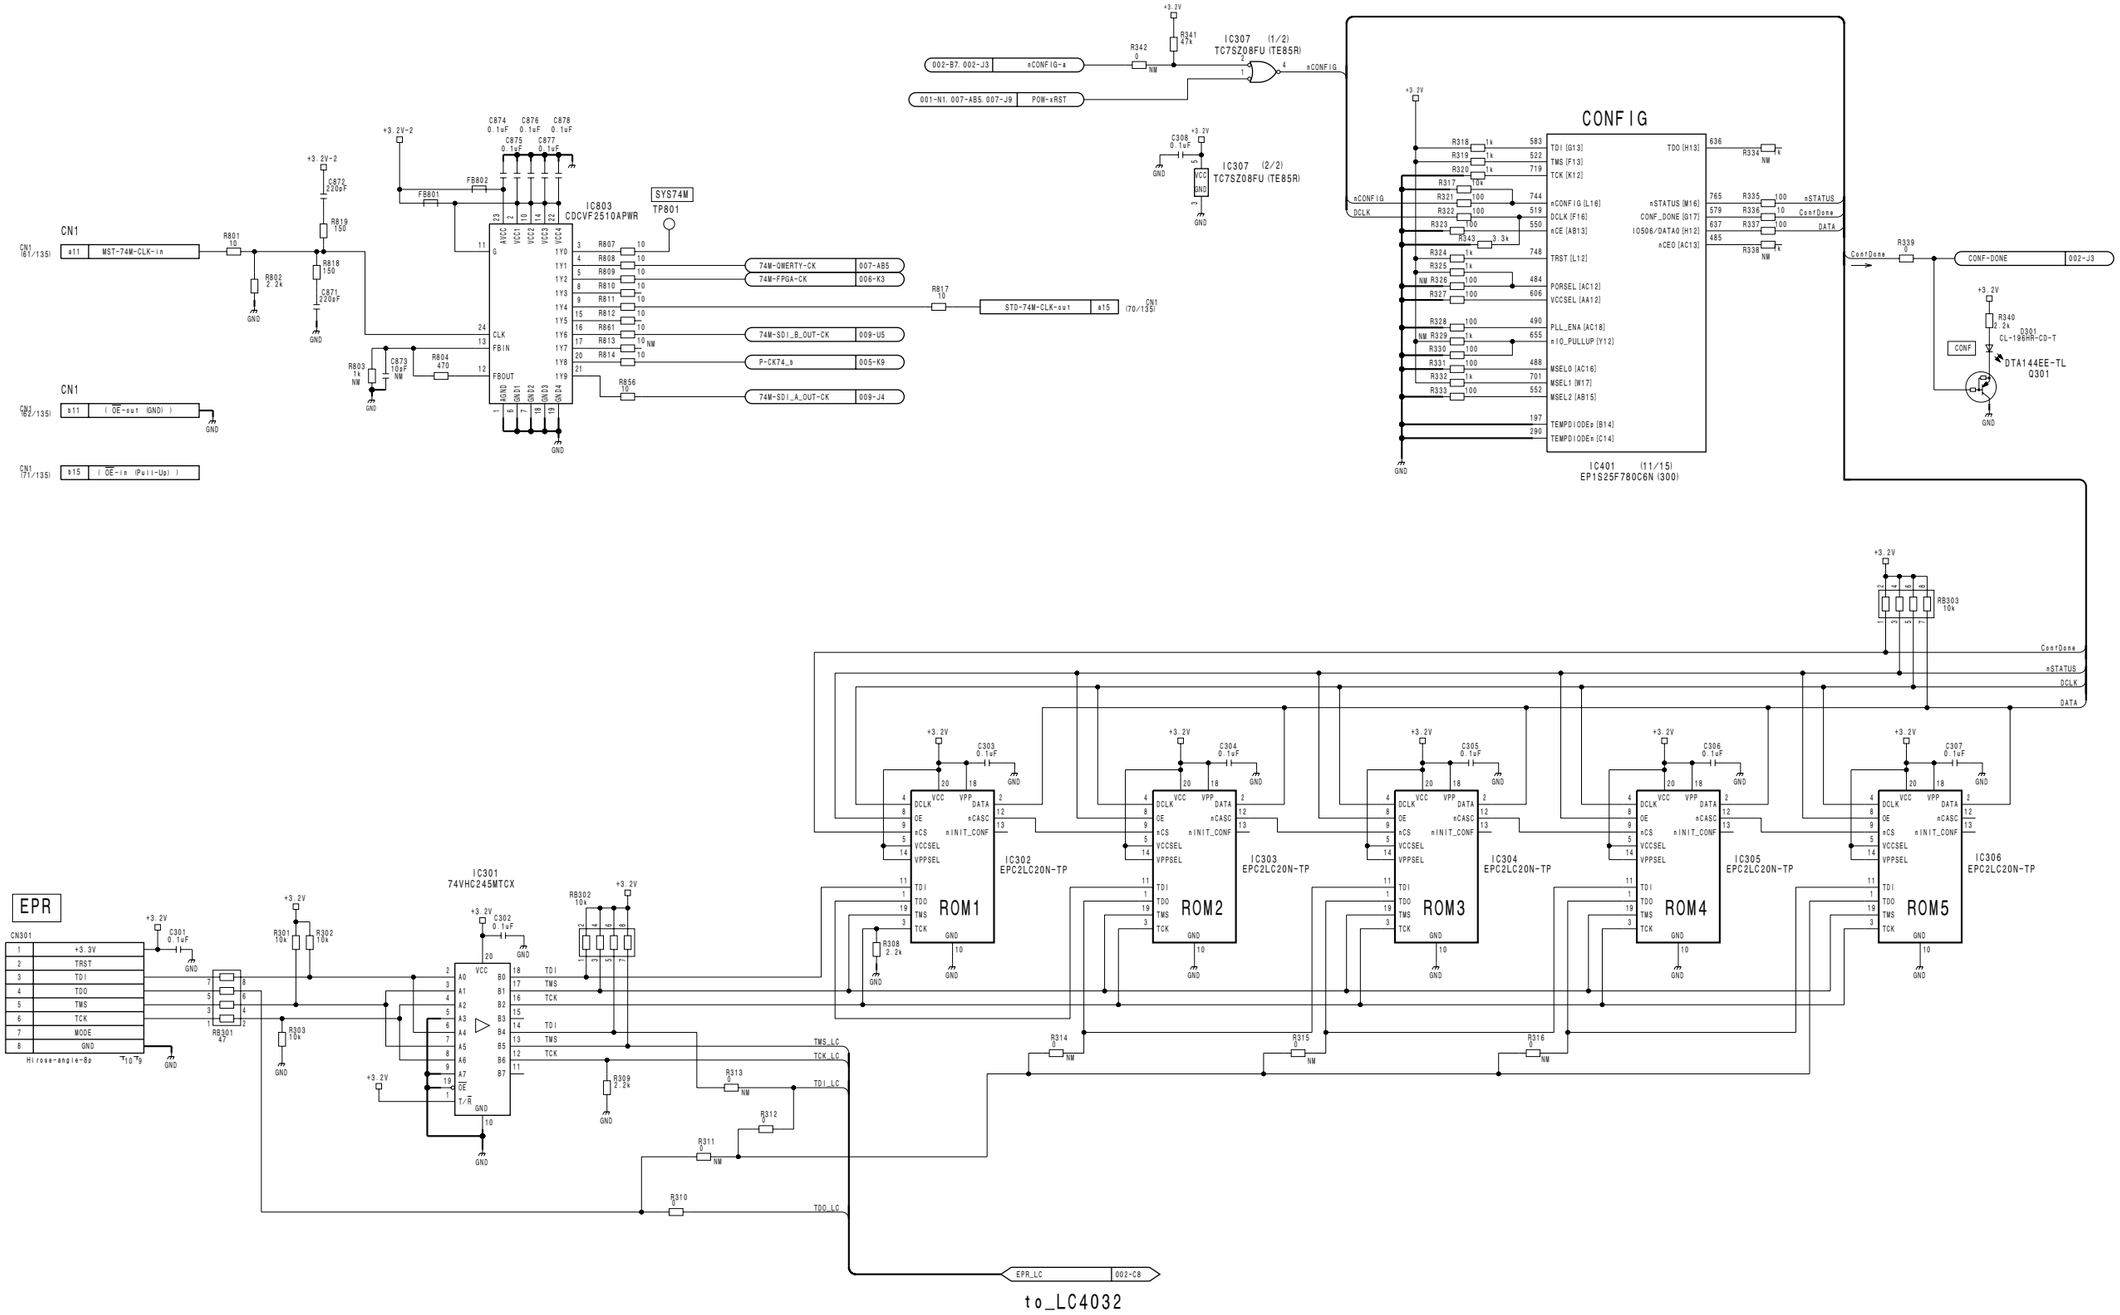


**DPR-271B (3/9)**
BOARD NO. 1-871-674-11
HDCU3300_DPR-271B_011_3

DPR-271B (4/9)
SUFFIX: -11

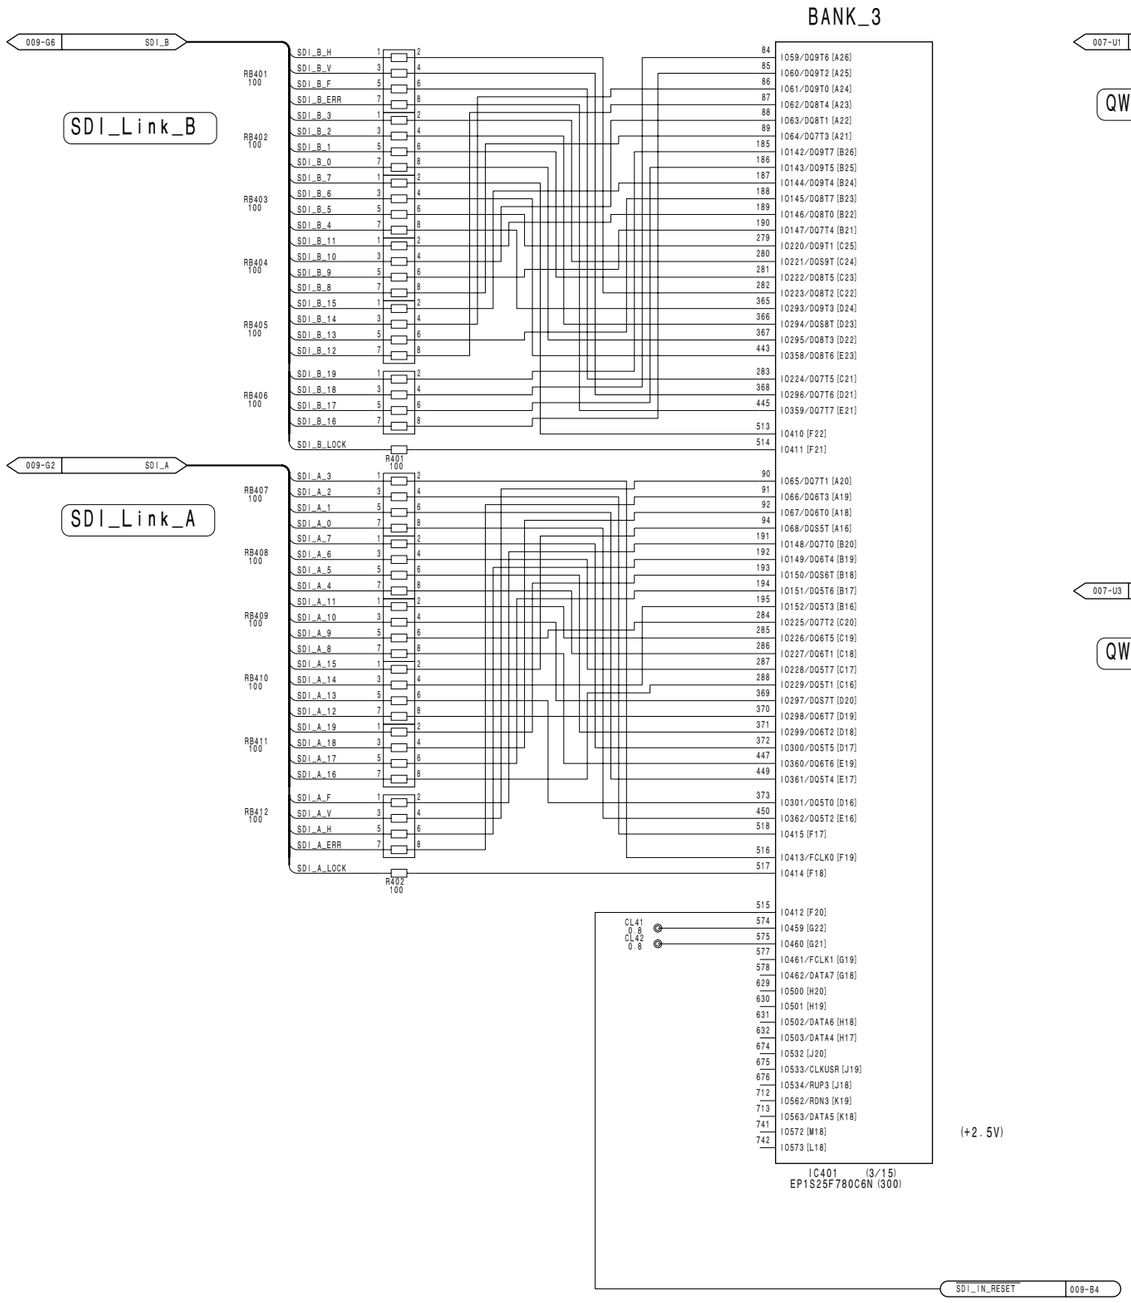


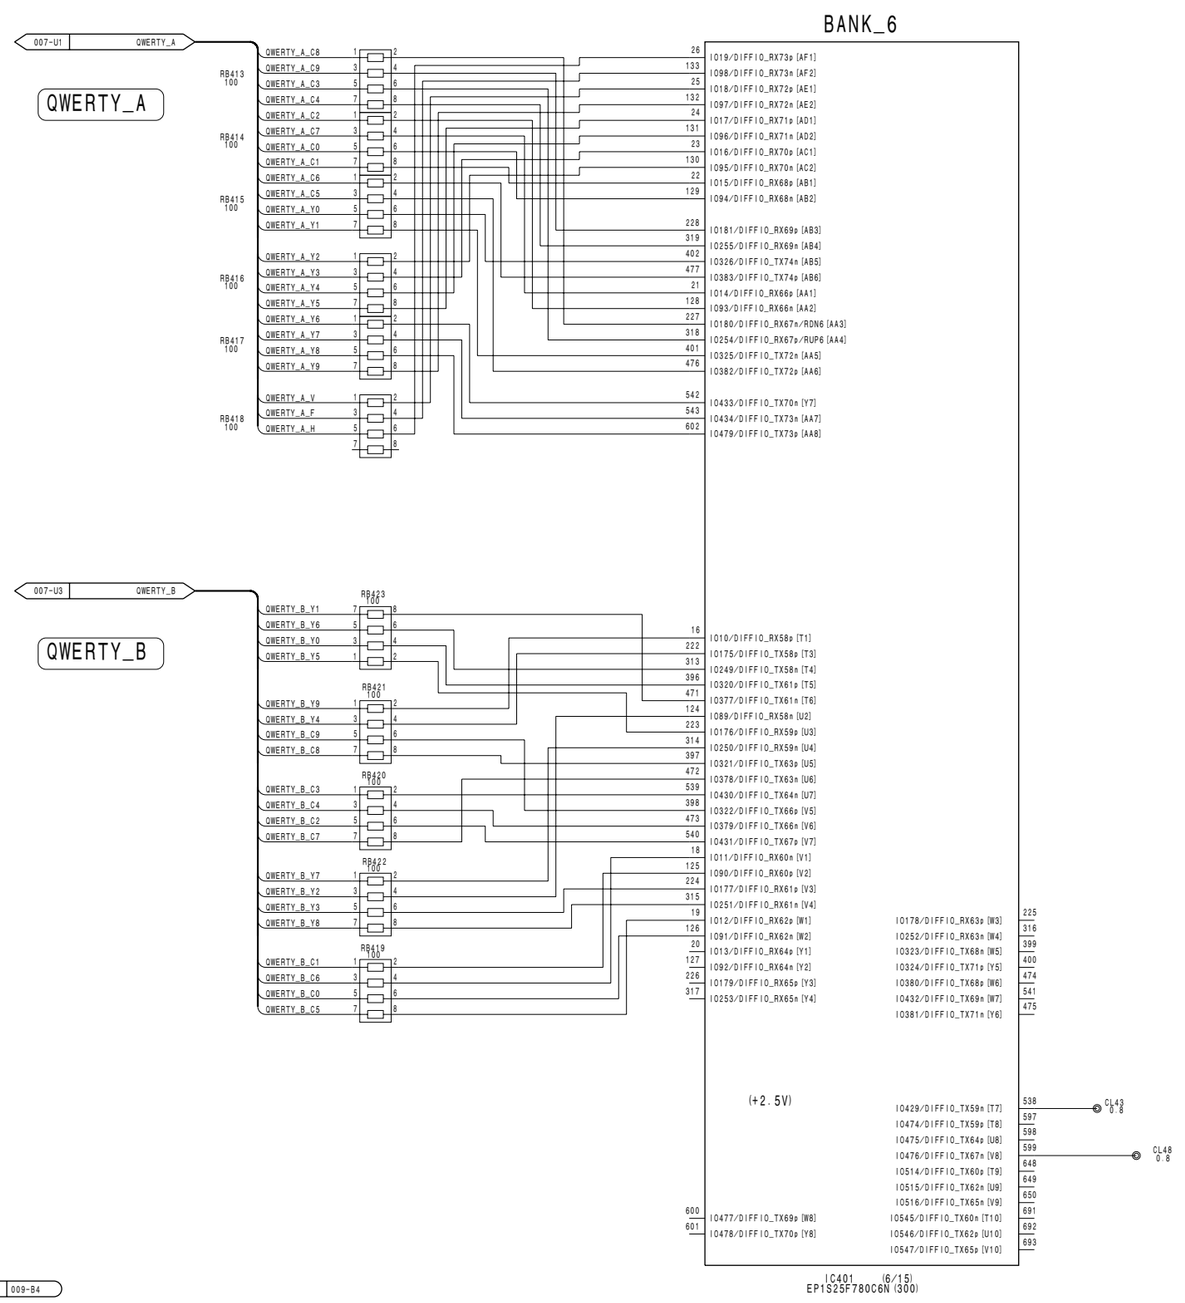

BANK_5

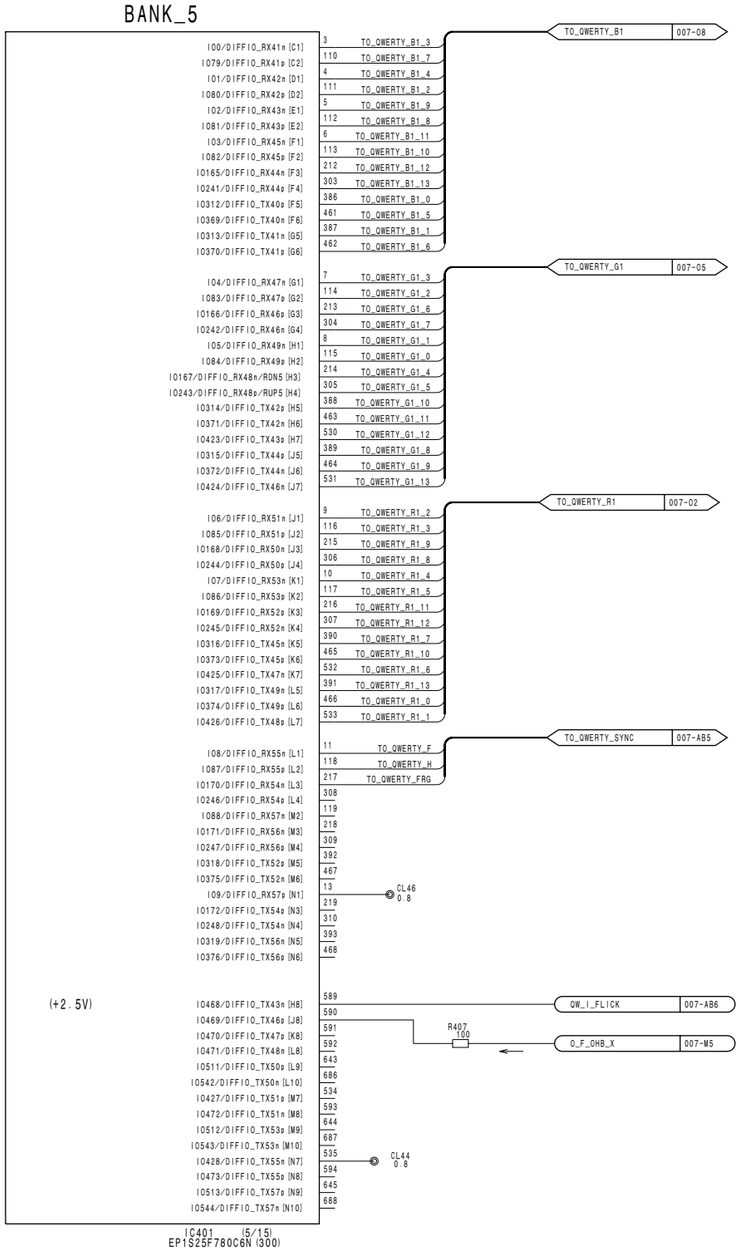

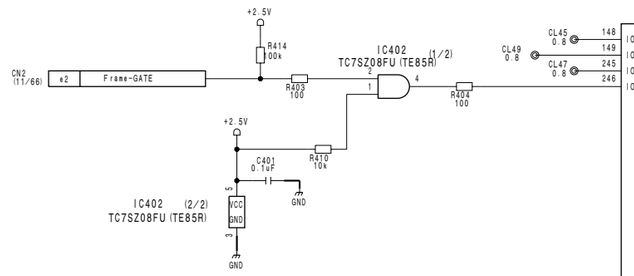


BANK_8

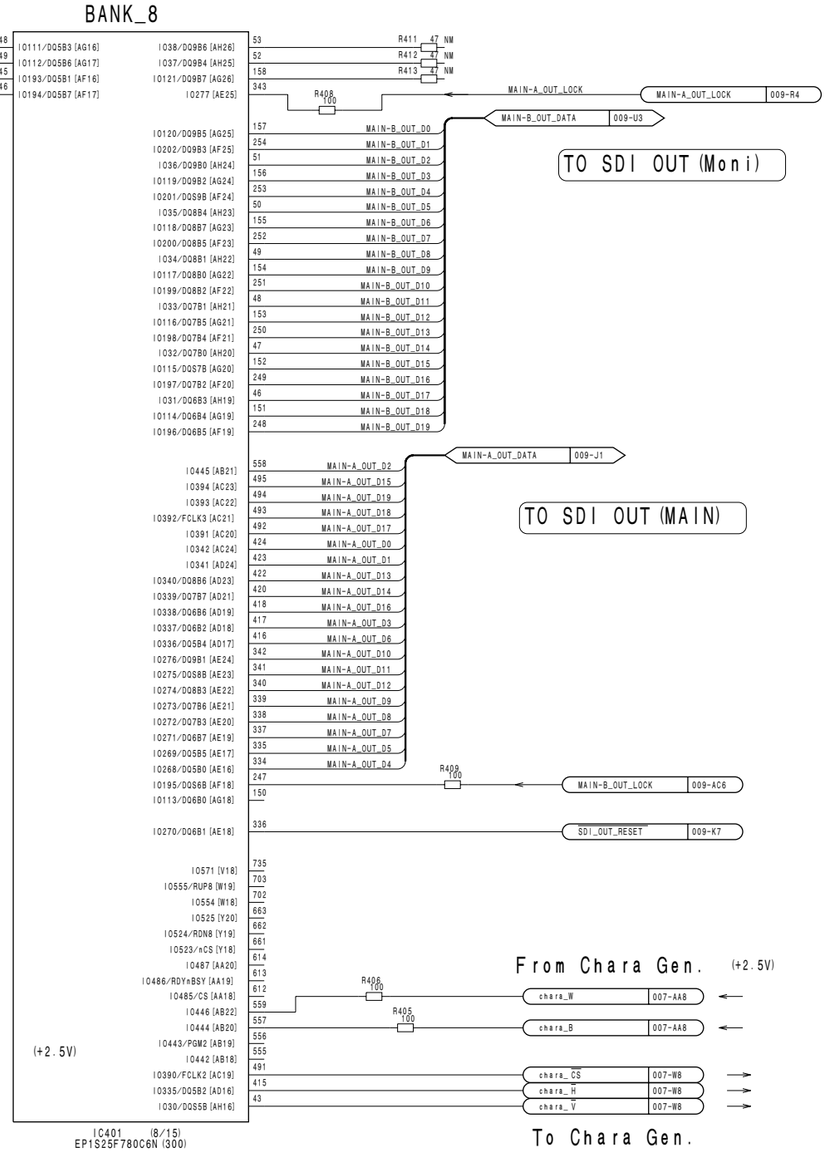


**DPR-271B (4/9)**
BOARD NO. 1-871-674-11
HDCU3300_DPR-271B_011_4

**DPR-271B (5/9)** **SUFFIX: -11**

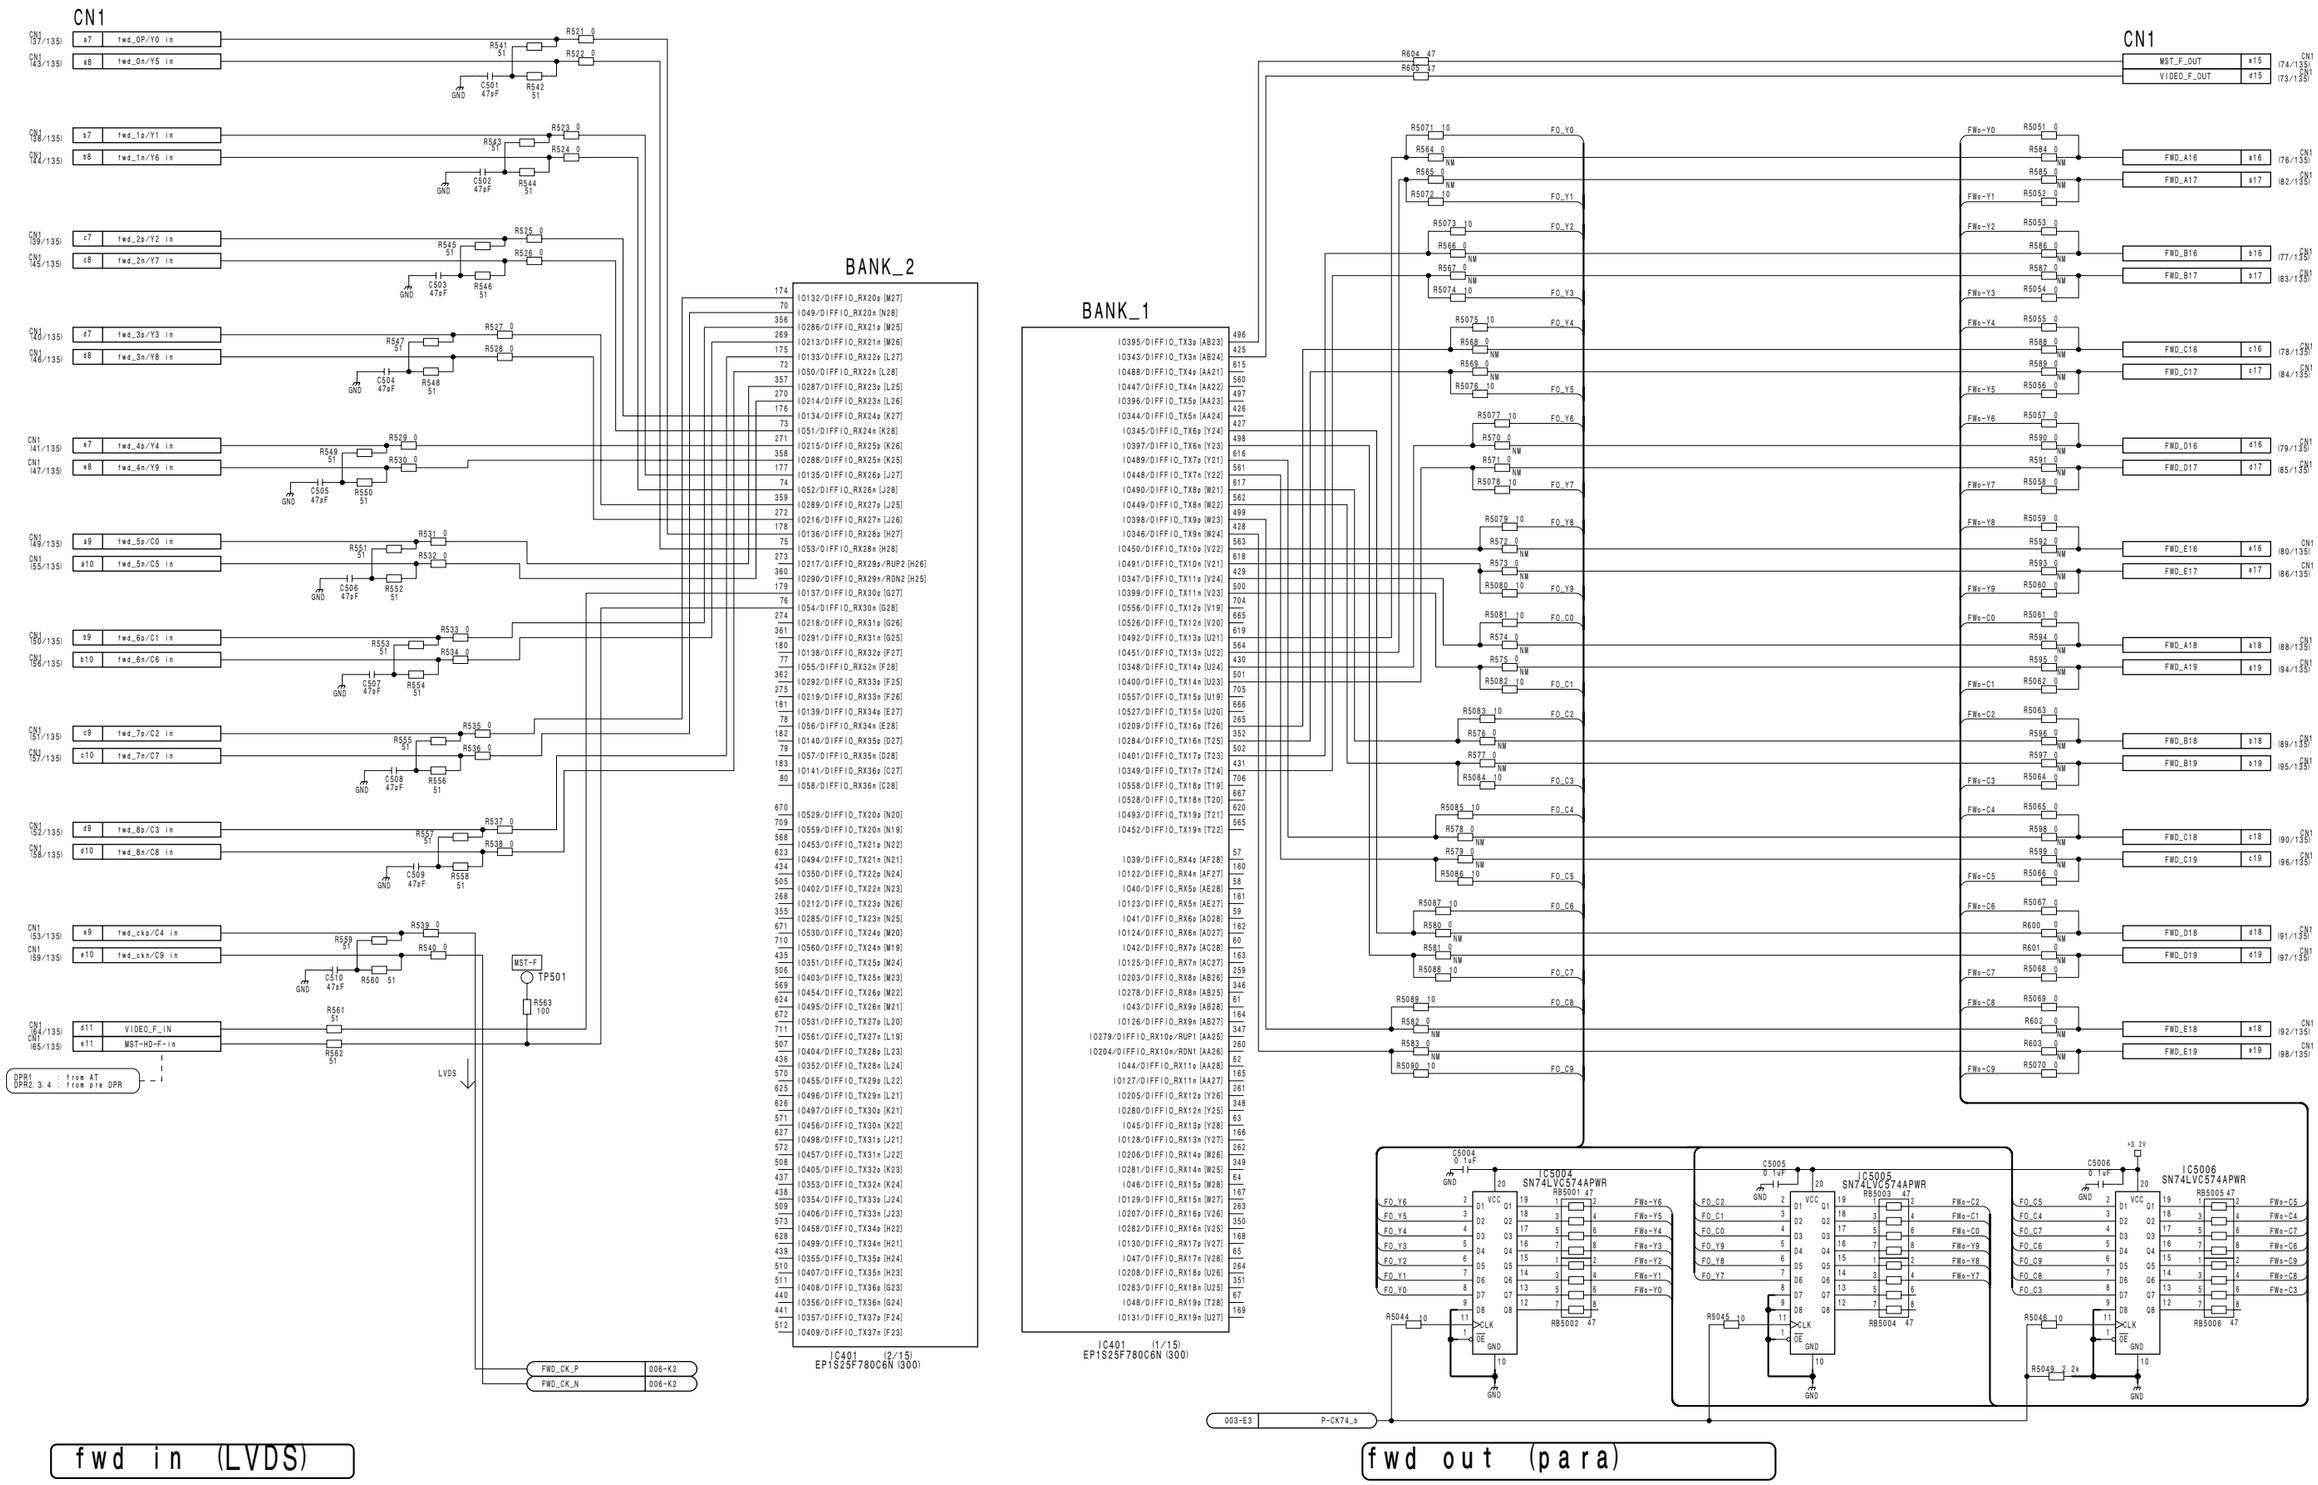

**DPR-271B (5/9)**
**SUFFIX: -11**

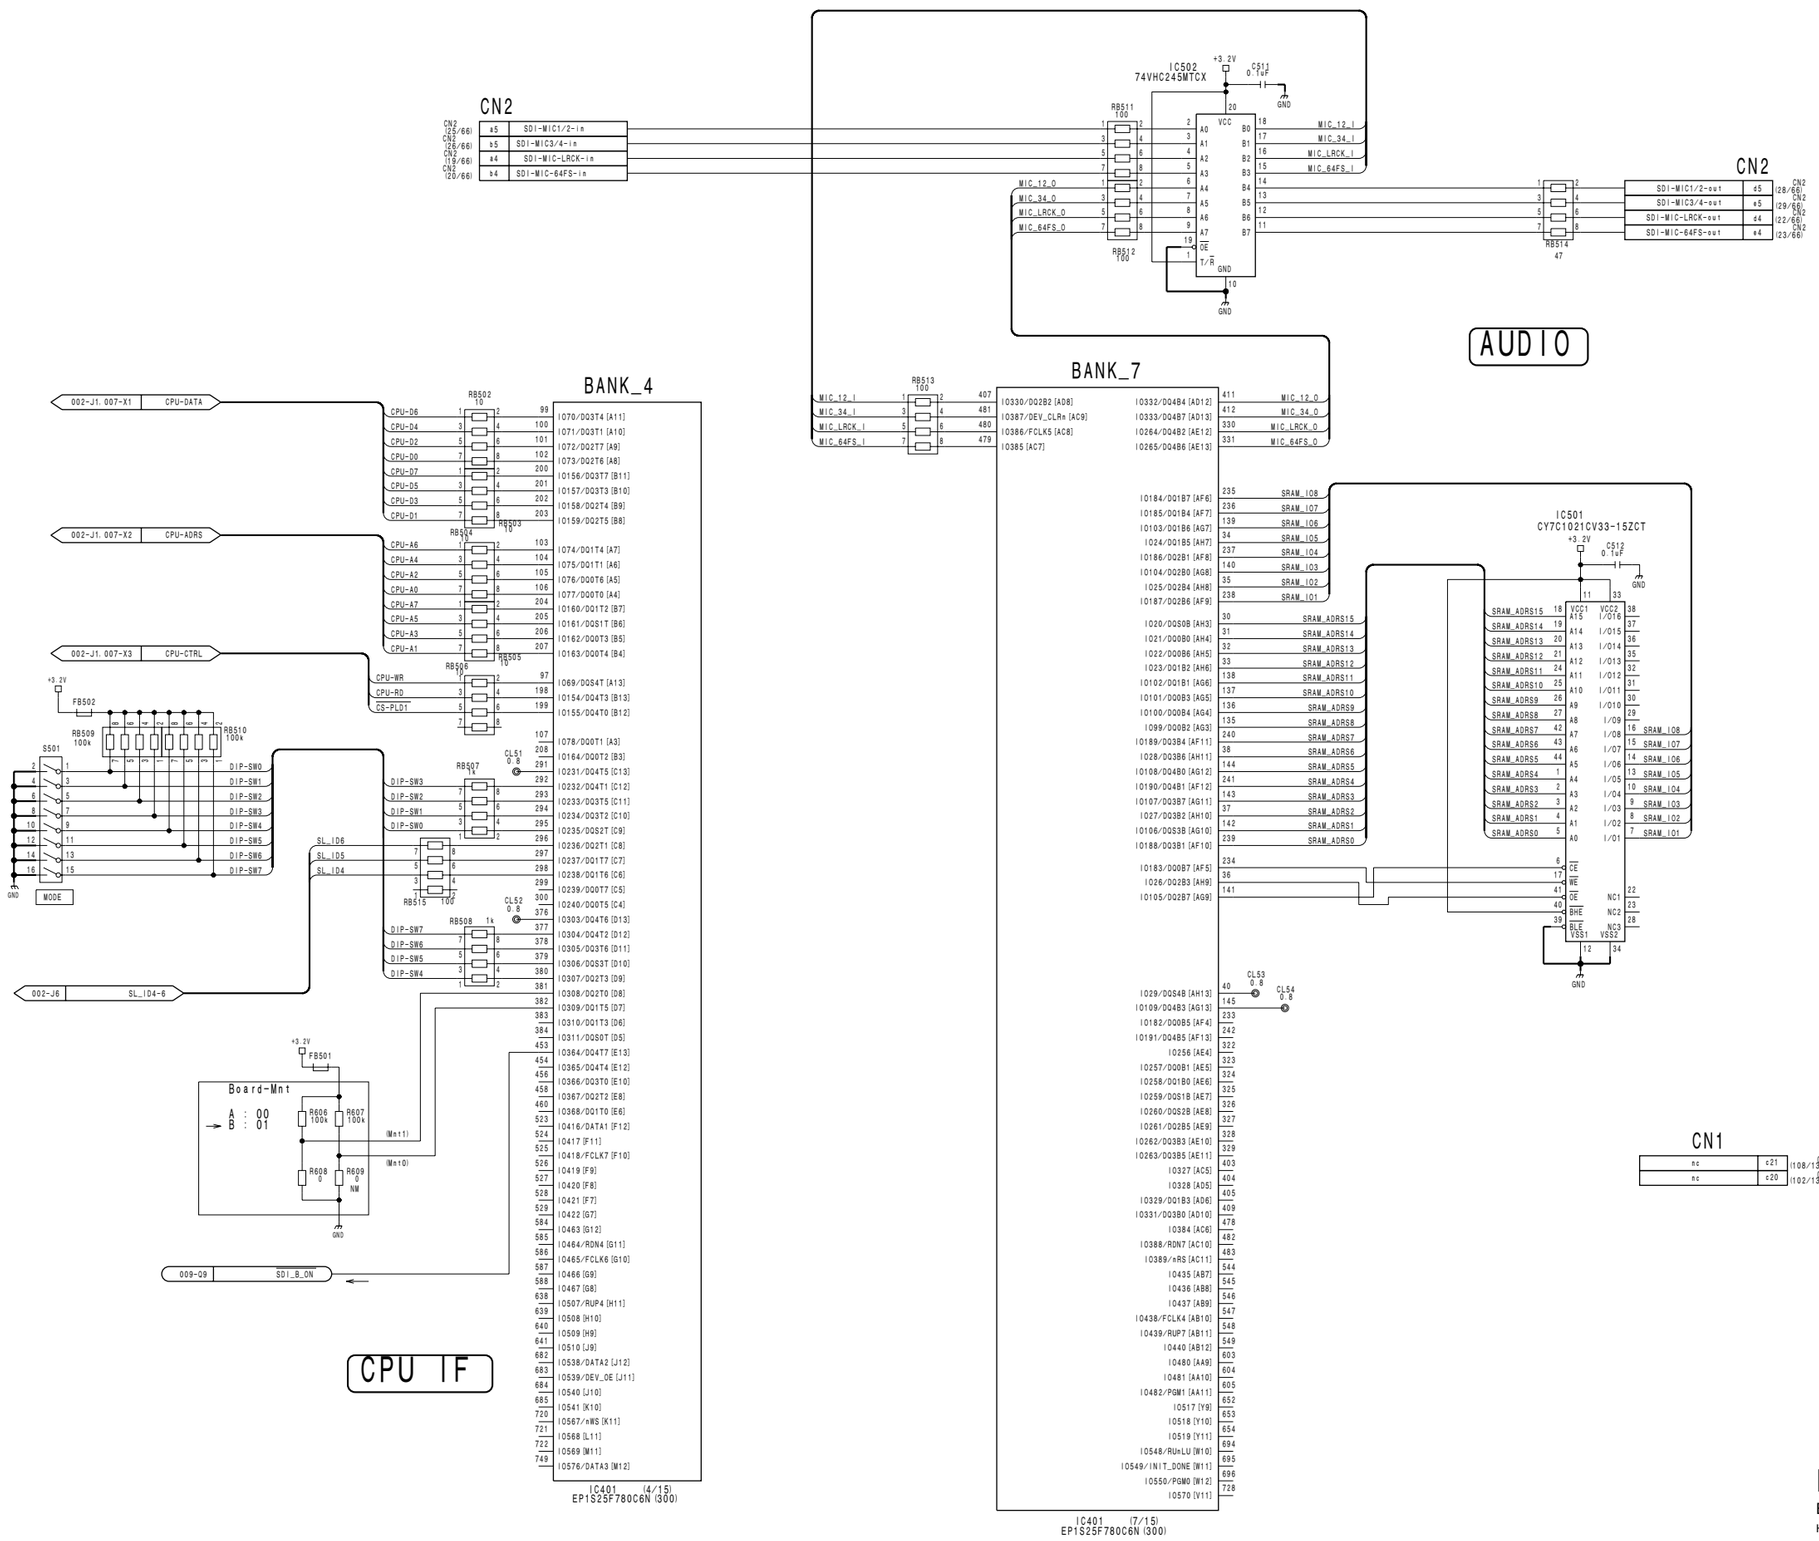


**DPR-271B (5/9)**
BOARD NO. 1-871-674-11
HDCU3300_DPR-271B_011_5

## GND

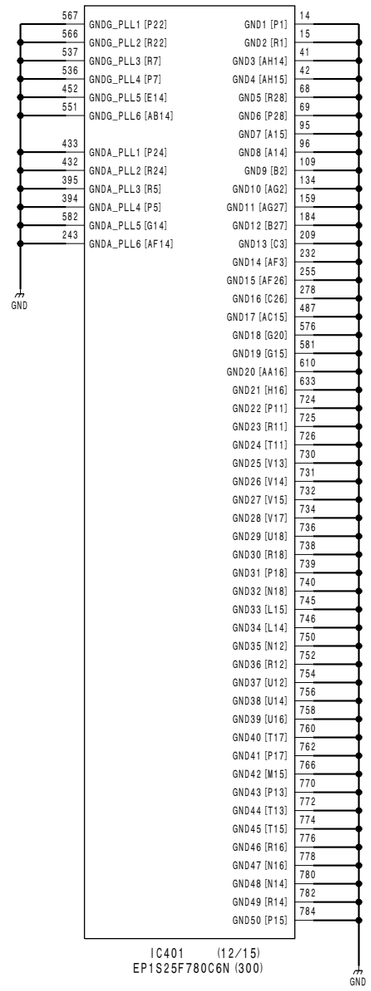


## NC




## VCC

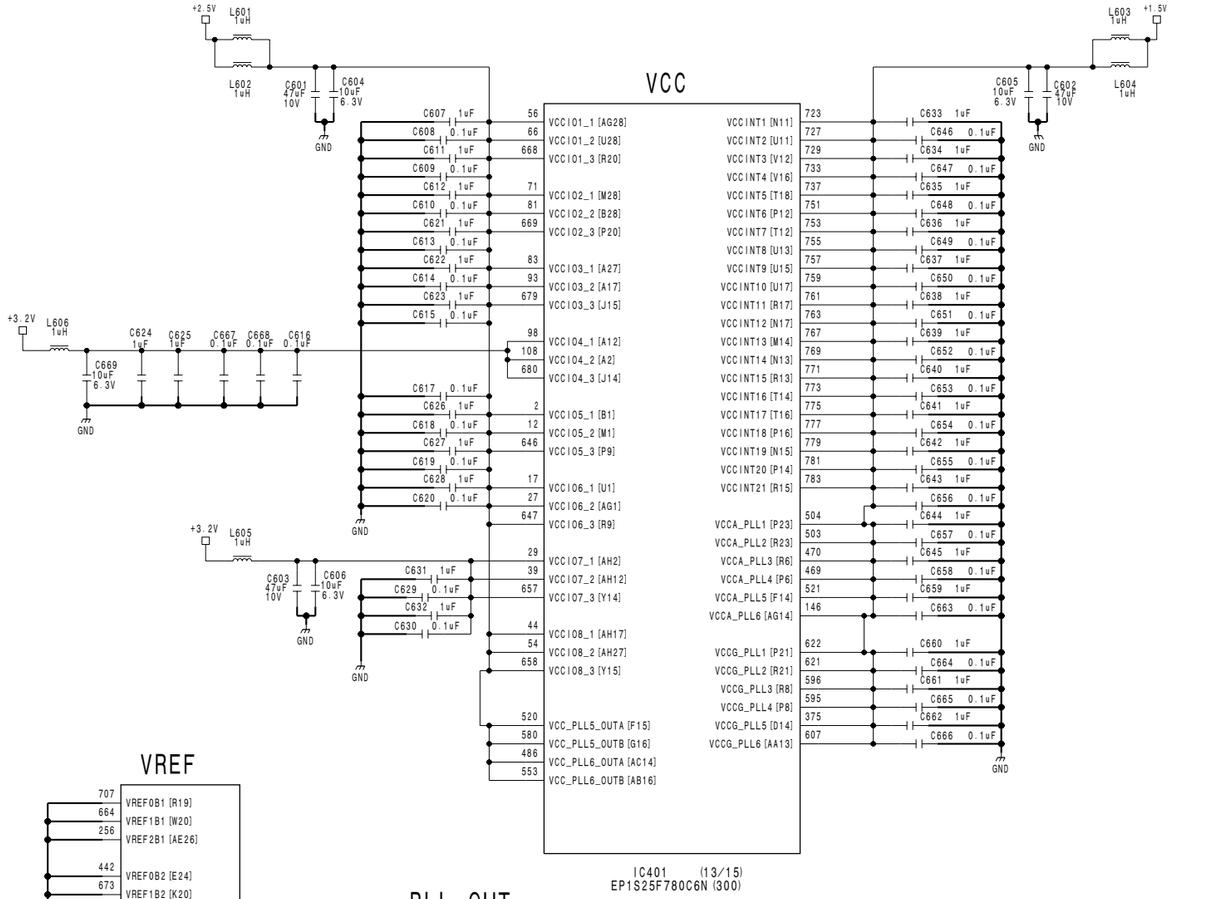


## VREF

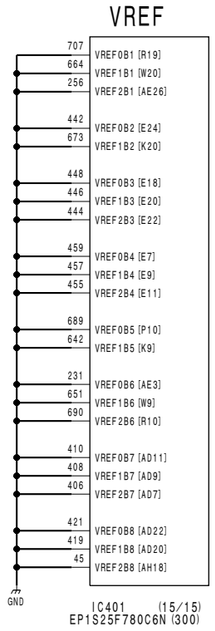


## PLL_OUT

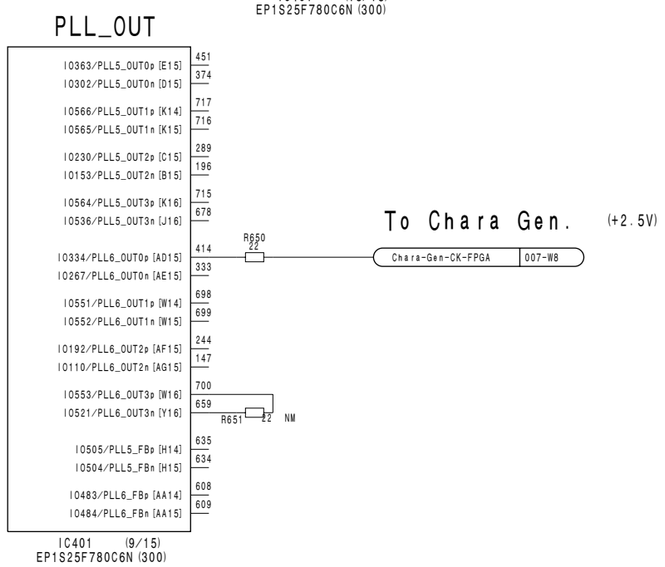


To Chara Gen. (+2.5V)

Chara-Gen-CK-FPGA | 007-W8

## CLK

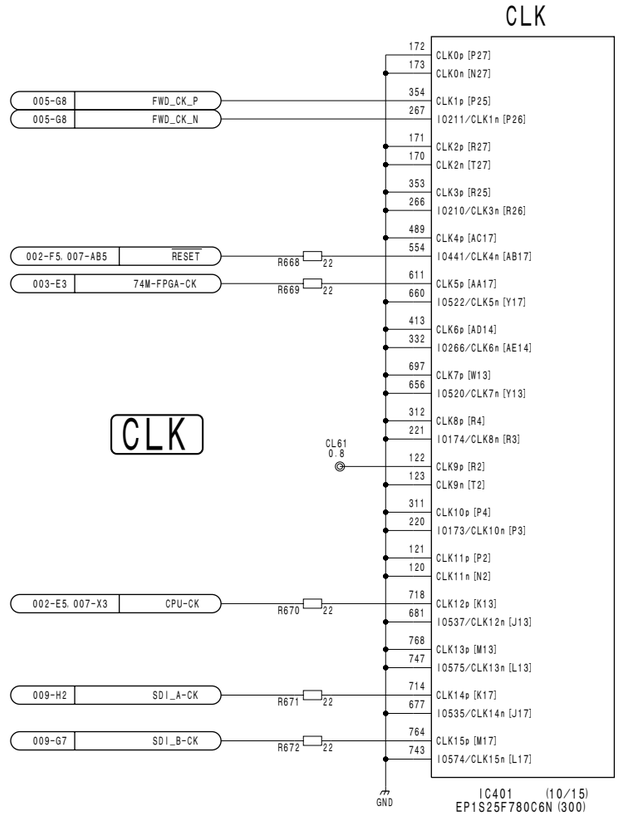


**DPR-271B (6/9)**
BOARD NO. 1-871-674-11
HDCU3300_DPR-271B_011_6

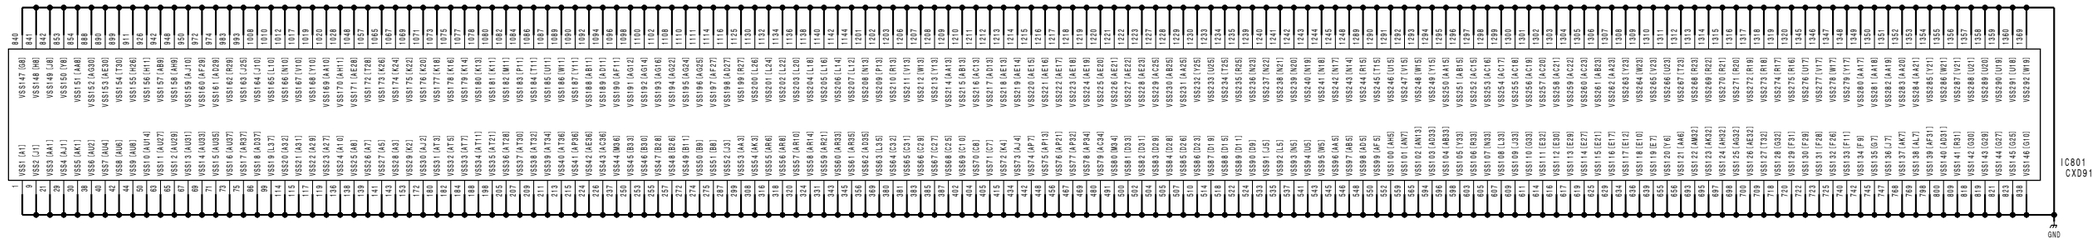
IC801 (16/19)
CXD9187GG-P
GND

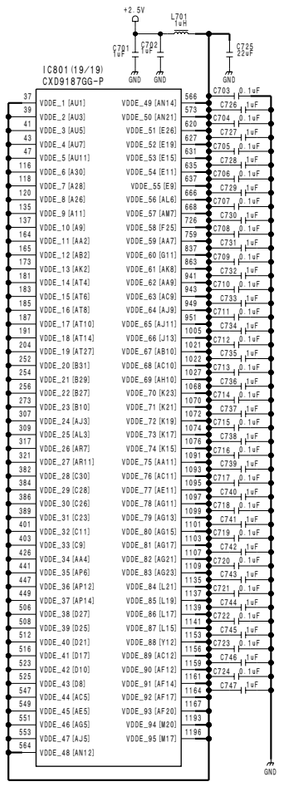
+2.5V
L701
1uH
C701 1uF
C702 1uF
C705 22uF
GND
IC801 (19/19)
CXD9187GG-P
VDDE_1 [AU1]
VDDE_2 [AU3]
VDDE_3 [AU5]
VDDE_4 [AU7]
VDDE_5 [AU11]
VDDE_6 [A30]
VDDE_7 [A28]
VDDE_8 [A26]
VDDE_9 [A11]
VDDE_10 [A9]
VDDE_11 [AA2]
VDDE_12 [AB2]
VDDE_13 [AK2]
VDDE_14 [AT4]
VDDE_15 [AT6]
VDDE_16 [AT8]
VDDE_17 [AT10]
VDDE_18 [AT14]
VDDE_19 [AT27]
VDDE_20 [B31]
VDDE_21 [B29]
VDDE_22 [B27]
VDDE_23 [B10]
VDDE_24 [AJ3]
VDDE_25 [AL3]
VDDE_26 [AR7]
VDDE_27 [AR11]
VDDE_28 [C30]
VDDE_29 [C28]
VDDE_30 [C26]
VDDE_31 [C23]
VDDE_32 [C11]
VDDE_33 [C9]
VDDE_34 [AA4]
VDDE_35 [AP6]
VDDE_36 [AP12]
VDDE_37 [AP14]
VDDE_38 [D27]
VDDE_39 [D25]
VDDE_40 [D21]
VDDE_41 [D17]
VDDE_42 [D10]
VDDE_43 [D8]
VDDE_44 [AC5]
VDDE_45 [AE5]
VDDE_46 [AG5]
VDDE_47 [AJ5]
VDDE_48 [AN12]
VDDE_49 [AN14]
VDDE_50 [AN21]
VDDE_51 [E26]
VDDE_52 [E19]
VDDE_53 [E15]
VDDE_54 [E11]
VDDE_55 [E9]
VDDE_56 [AL6]
VDDE_57 [AM7]
VDDE_58 [F25]
VDDE_59 [AA7]
VDDE_60 [G11]
VDDE_61 [AK8]
VDDE_62 [AA9]
VDDE_63 [AC9]
VDDE_64 [AJ9]
VDDE_65 [AJ11]
VDDE_66 [J13]
VDDE_67 [AB10]
VDDE_68 [AC10]
VDDE_69 [AH10]
VDDE_70 [K23]
VDDE_71 [K21]
VDDE_72 [K19]
VDDE_73 [K17]
VDDE_74 [K15]
VDDE_75 [AA11]
VDDE_76 [AC11]
VDDE_77 [AE11]
VDDE_78 [AG11]
VDDE_79 [AG13]
VDDE_80 [AG15]
VDDE_81 [AG17]
VDDE_82 [AG21]
VDDE_83 [AG23]
VDDE_84 [L21]
VDDE_85 [L19]
VDDE_86 [L17]
VDDE_87 [L15]
VDDE_88 [Y12]
VDDE_89 [AC12]
VDDE_90 [AF12]
VDDE_91 [AF14]
VDDE_92 [AF17]
VDDE_93 [AF20]
VDDE_94 [M20]
VDDE_95 [M17]
GND

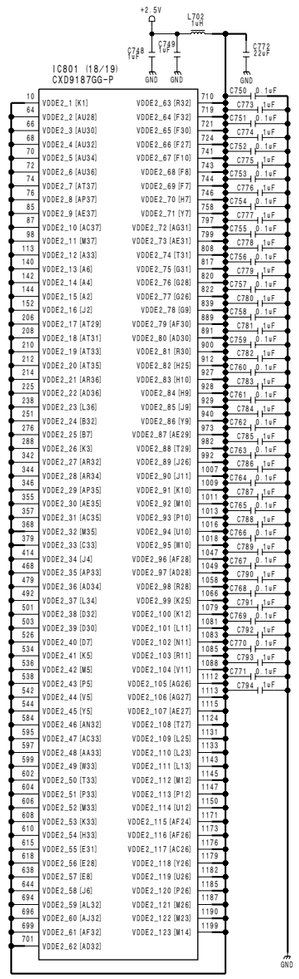
+2.5V
L702
1uH
C748 1uF
C749 1uF
C773 22uF
GND
IC801 (18/19)
CXD9187GG-P
VDDE2_1 [K1]
VDDE2_2 [AU28]
VDDE2_3 [AU30]
VDDE2_4 [AU32]
VDDE2_5 [AU34]
VDDE2_6 [AU36]
VDDE2_7 [AT37]
VDDE2_8 [AT37]
VDDE2_9 [AE37]
VDDE2_10 [AC37]
VDDE2_11 [M37]
VDDE2_12 [A33]
VDDE2_13 [A6]
VDDE2_14 [A4]
VDDE2_15 [A2]
VDDE2_16 [J2]
VDDE2_17 [AT29]
VDDE2_18 [AT31]
VDDE2_19 [AT33]
VDDE2_20 [AT35]
VDDE2_21 [AR36]
VDDE2_22 [AD36]
VDDE2_23 [L36]
VDDE2_24 [B32]
VDDE2_25 [B7]
VDDE2_26 [K3]
VDDE2_27 [AR32]
VDDE2_28 [AR34]
VDDE2_29 [AP35]
VDDE2_30 [AE35]
VDDE2_31 [AC35]
VDDE2_32 [M35]
VDDE2_33 [C33]
VDDE2_34 [J4]
VDDE2_35 [AP33]
VDDE2_36 [AD34]
VDDE2_37 [L34]
VDDE2_38 [D32]
VDDE2_39 [D30]
VDDE2_40 [D7]
VDDE2_41 [K5]
VDDE2_42 [M5]
VDDE2_43 [P5]
VDDE2_44 [V5]
VDDE2_45 [Y5]
VDDE2_46 [AN32]
VDDE2_47 [AC33]
VDDE2_48 [AA33]
VDDE2_49 [W33]
VDDE2_50 [T33]
VDDE2_51 [P33]
VDDE2_52 [M33]
VDDE2_53 [K33]
VDDE2_54 [H33]
VDDE2_55 [E31]
VDDE2_56 [E28]
VDDE2_57 [E8]
VDDE2_58 [J6]
VDDE2_59 [AL32]
VDDE2_60 [AJ32]
VDDE2_61 [AF32]
VDDE2_62 [AD32]
VDDE2_63 [R32]
VDDE2_64 [F32]
VDDE2_65 [F30]
VDDE2_66 [F27]
VDDE2_67 [F10]
VDDE2_68 [F8]
VDDE2_69 [F7]
VDDE2_70 [H7]
VDDE2_71 [Y7]
VDDE2_72 [AG31]
VDDE2_73 [AE31]
VDDE2_74 [T31]
VDDE2_75 [G31]
VDDE2_76 [G28]
VDDE2_77 [G26]
VDDE2_78 [G9]
VDDE2_79 [AF30]
VDDE2_80 [AD30]
VDDE2_81 [R30]
VDDE2_82 [H25]
VDDE2_83 [H10]
VDDE2_84 [H9]
VDDE2_85 [J9]
VDDE2_86 [Y9]
VDDE2_87 [AE29]
VDDE2_88 [T29]
VDDE2_89 [J26]
VDDE2_90 [J11]
VDDE2_91 [K10]
VDDE2_92 [M10]
VDDE2_93 [P10]
VDDE2_94 [U10]
VDDE2_95 [W10]
VDDE2_96 [AF28]
VDDE2_97 [AD28]
VDDE2_98 [R28]
VDDE2_99 [K25]
VDDE2_100 [K12]
VDDE2_101 [L11]
VDDE2_102 [N11]
VDDE2_103 [R11]
VDDE2_104 [V11]
VDDE2_105 [AG26]
VDDE2_106 [AG27]
VDDE2_107 [AE27]
VDDE2_108 [T27]
VDDE2_109 [L25]
VDDE2_110 [L23]
VDDE2_111 [L13]
VDDE2_112 [M12]
VDDE2_113 [P12]
VDDE2_114 [U12]
VDDE2_115 [AF24]
VDDE2_116 [AF26]
VDDE2_117 [AC26]
VDDE2_118 [Y26]
VDDE2_119 [U26]
VDDE2_120 [P26]
VDDE2_121 [M26]
VDDE2_122 [M23]
VDDE2_123 [M14]
GND

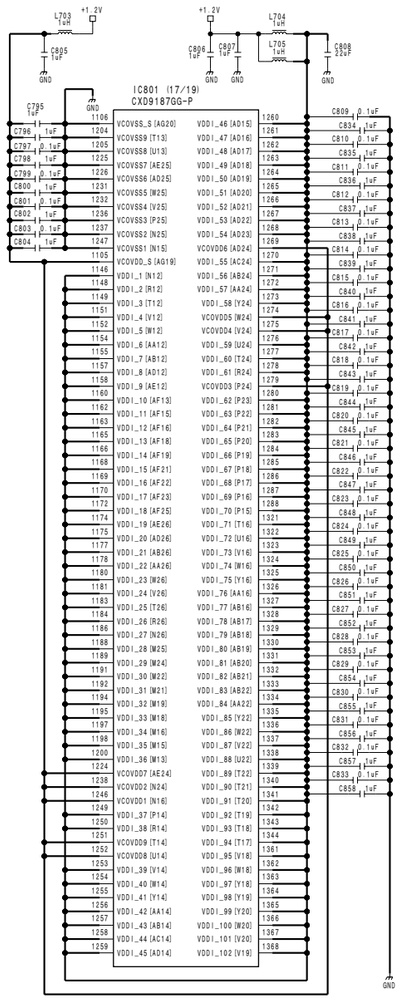
+1.2V
L703
1uH
C805 1uF
GND
C795 1uF
C796 1uF
C797 0.1uF
C798 1uF
C799 0.1uF
C800 1uF
C801 0.1uF
C802 1uF
C803 0.1uF
C804 1uF
IC801 (17/19)
CXD9187GG-P
VCOVSS_S [AG20]
VCOVSS9 [T13]
VCOVSS8 [U13]
VCOVSS7 [AE25]
VCOVSS6 [AD25]
VCOVSS5 [W25]
VCOVSS4 [V25]
VCOVSS3 [P25]
VCOVSS2 [N25]
VCOVSS1 [N15]
VCOVDD_S [AG19]
VDD I_1 [N12]
VDD I_2 [R12]
VDD I_3 [T12]
VDD I_4 [V12]
VDD I_5 [W12]
VDD I_6 [AA12]
VDD I_7 [AB12]
VDD I_8 [AD12]
VDD I_9 [AE12]
VDD I_10 [AF13]
VDD I_11 [AF15]
VDD I_12 [AF16]
VDD I_13 [AF18]
VDD I_14 [AF19]
VDD I_15 [AF21]
VDD I_16 [AF22]
VDD I_17 [AF23]
VDD I_18 [AF25]
VDD I_19 [AE26]
VDD I_20 [AD26]
VDD I_21 [AB26]
VDD I_22 [AA26]
VDD I_23 [W26]
VDD I_24 [V26]
VDD I_25 [T26]
VDD I_26 [R26]
VDD I_27 [N26]
VDD I_28 [M25]
VDD I_29 [M24]
VDD I_30 [M22]
VDD I_31 [M21]
VDD I_32 [M19]
VDD I_33 [M18]
VDD I_34 [M16]
VDD I_35 [M15]
VDD I_36 [M13]
VCOVDD7 [AE24]
VCOVDD2 [N24]
VCOVDD1 [N16]
VDD I_37 [P14]
VDD I_38 [R14]
VCOVDD9 [T14]
VCOVDD8 [U14]
VDD I_39 [V14]
VDD I_40 [W14]
VDD I_41 [Y14]
VDD I_42 [AA14]
VDD I_43 [AB14]
VDD I_44 [AC14]
VDD I_45 [AD14]
+1.2V
L704
1uH
C806 1uF
C807 1uF
C808 22uF
GND
C809 0.1uF
C834 1uF
C810 0.1uF
C835 1uF
C811 0.1uF
C836 1uF
C812 0.1uF
C837 1uF
C813 0.1uF
C838 1uF
C814 0.1uF
C839 1uF
C815 0.1uF
C840 1uF
C816 0.1uF
C841 1uF
C817 0.1uF
C842 1uF
C818 0.1uF
C843 1uF
C819 0.1uF
C844 1uF
C820 0.1uF
C845 1uF
C821 0.1uF
C846 1uF
C822 0.1uF
C847 1uF
C823 0.1uF
C848 1uF
C824 0.1uF
C849 1uF
C825 0.1uF
C850 1uF
C826 0.1uF
C851 1uF
C827 0.1uF
C852 1uF
C828 0.1uF
C853 1uF
C829 0.1uF
C854 1uF
C830 0.1uF
C855 1uF
C831 0.1uF
C856 1uF
C832 0.1uF
C857 1uF
C833 0.1uF
C858 1uF
VDD I_46 [AD15]
VDD I_47 [AD16]
VDD I_48 [AD17]
VDD I_49 [AD18]
VDD I_50 [AD19]
VDD I_51 [AD20]
VDD I_52 [AD21]
VDD I_53 [AD22]
VDD I_54 [AD23]
VCOVDD6 [AD24]
VDD I_55 [AC24]
VDD I_56 [AB24]
VDD I_57 [AA24]
VDD I_58 [Y24]
VCOVDDS [W24]
VCOVDD4 [V24]
VDD I_59 [U24]
VDD I_60 [T24]
VDD I_61 [R24]
VCOVDD3 [P24]
VDD I_62 [P23]
VDD I_63 [P22]
VDD I_64 [P21]
VDD I_65 [P20]
VDD I_66 [P19]
VDD I_67 [P18]
VDD I_68 [P17]
VDD I_69 [P16]
VDD I_70 [P15]
VDD I_71 [T16]
VDD I_72 [U16]
VDD I_73 [V16]
VDD I_74 [W16]
VDD I_75 [Y16]
VDD I_76 [AA16]
VDD I_77 [AB16]
VDD I_78 [AB17]
VDD I_79 [AB18]
VDD I_80 [AB19]
VDD I_81 [AB20]
VDD I_82 [AB21]
VDD I_83 [AB22]
VDD I_84 [AA22]
VDD I_85 [Y22]
VDD I_86 [W22]
VDD I_87 [V22]
VDD I_88 [U22]
VDD I_89 [T22]
VDD I_90 [T21]
VDD I_91 [T20]
VDD I_92 [T19]
VDD I_93 [T18]
VDD I_94 [T17]
VDD I_95 [V18]
VDD I_96 [W18]
VDD I_97 [Y18]
VDD I_98 [Y19]
VDD I_99 [Y20]
VDD I_100 [W20]
VDD I_101 [V20]
VDD I_102 [V19]
GND

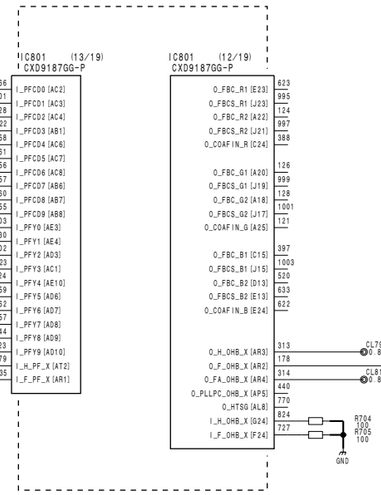
IC801 (13/19)
CXD9187GG-P
I_PFCD0 [AC2]
I_PFCD1 [AC3]
I_PFCD2 [AC4]
I_PFCD3 [AB1]
I_PFCD4 [AC6]
I_PFCD5 [AC7]
I_PFCD6 [AC8]
I_PFCD7 [AB6]
I_PFCD8 [AB7]
I_PFCD9 [AB8]
I_PFY0 [AE3]
I_PFY1 [AE4]
I_PFY2 [AD3]
I_PFY3 [AC1]
I_PFY4 [AE10]
I_PFY5 [AD6]
I_PFY6 [AD7]
I_PFY7 [AD8]
I_PFY8 [AD9]
I_PFY9 [AD10]
I_H_PF_X [AT2]
I_F_PF_X [AR1]
GND
IC801 (12/19)
CXD9187GG-P
O_FBC_R1 [E23]
O_FBCS_R1 [J23]
O_FBC_R2 [A22]
O_FBCS_R2 [J21]
O_COAFIN_R [C24]
O_FBC_G1 [A20]
O_FBCS_G1 [J19]
O_FBC_G2 [A18]
O_FBCS_G2 [J17]
O_COAFIN_G [A25]
O_FBC_B1 [C15]
O_FBCS_B1 [J15]
O_FBC_B2 [D13]
O_FBCS_B2 [E13]
O_COAFIN_B [E24]
O_H_OHB_X [AR3]
O_F_OHB_X [AR2]
O_FA_OHB_X [AP4]
O_PLLPC_OHB_X [AP5]
O_HTSG [AL8]
I_H_OHB_X [G24]
I_F_OHB_X [F24]
CL79 0 Ω
CL80 0 Ω
CL81 0 Ω
O_F_OHB_X
604-G6
R704 100
R705 100
GND


IC801 (15/19)
CXD9187GG-P
+2.5V
R701 2.2K
R702 2.2K
C859 0.1uF
C860 0.1uF
C861 0.1uF
GND
VREF31 [AE34]
VREF72 [D6]
VREF92 [R5]
VREF91 [T5]
VREF32 [AE33]
VREF21 [V33]
VREF22 [U33]
VREF11 [F33]
VREF12 [E33]
VREF71 [E6]
VREF61 [AG29]
VREF81 [R10]
VREF82 [T10]
VREF62 [AG28]
VREF42 [K27]
VREF51 [Y27]
VREF52 [M27]
VREF41 [L27]

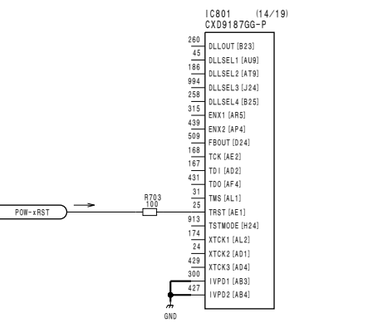
IC801 (14/19)
CXD9187GG-P
DLLOUT [B23]
DLLSEL1 [AU9]
DLLSEL2 [AT9]
DLLSEL3 [J24]
DLLSEL4 [B25]
ENX1 [AR5]
ENX2 [AP4]
FBOUT [D24]
TCK [AE2]
TDI [AD2]
TDO [AF4]
TMS [AL1]
TRST [AE1]
TSTMODE [H24]
XTCK1 [AL2]
XTCK2 [AD1]
XTCK3 [AD4]
IVPD1 [AB3]
IVPD2 [AB4]
001-N1. 003-G2. 007-AB5
POW-xRST
R703 100
GND

**DPR-271B (7/9)**
**SUFFIX: -11**

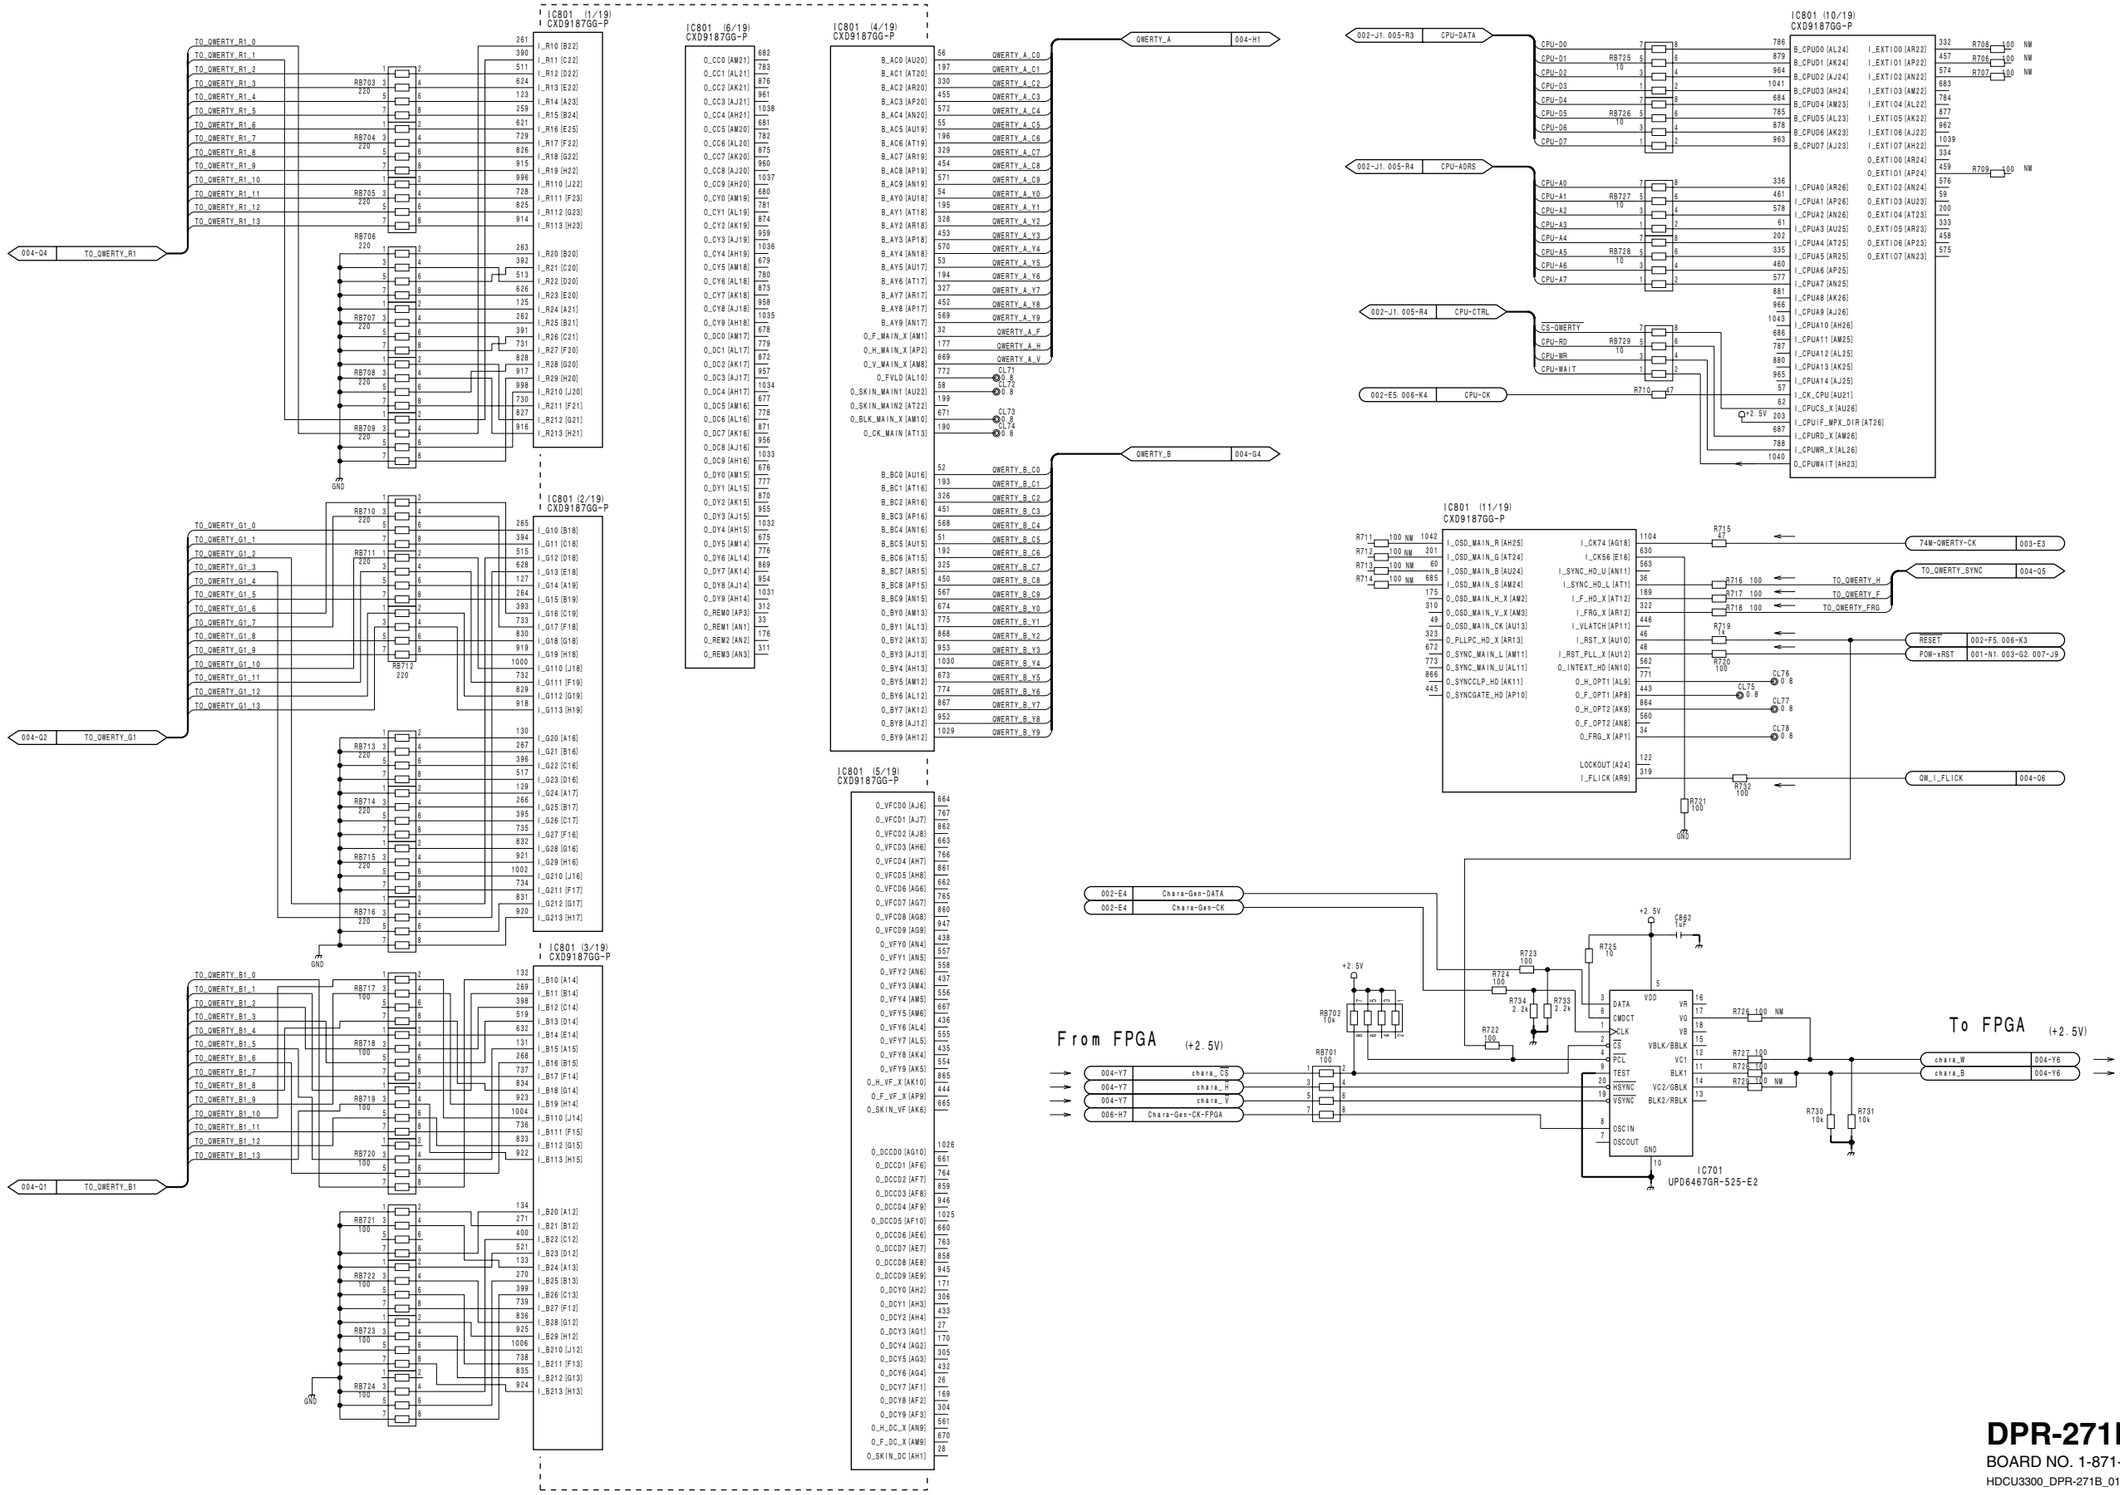



7-61

**DPR-271B (7/9)**
BOARD NO. 1-871-674-11
HDCU3300_DPR-271B_011_7

DPR-271B (8/9)
SUFFIX: -11

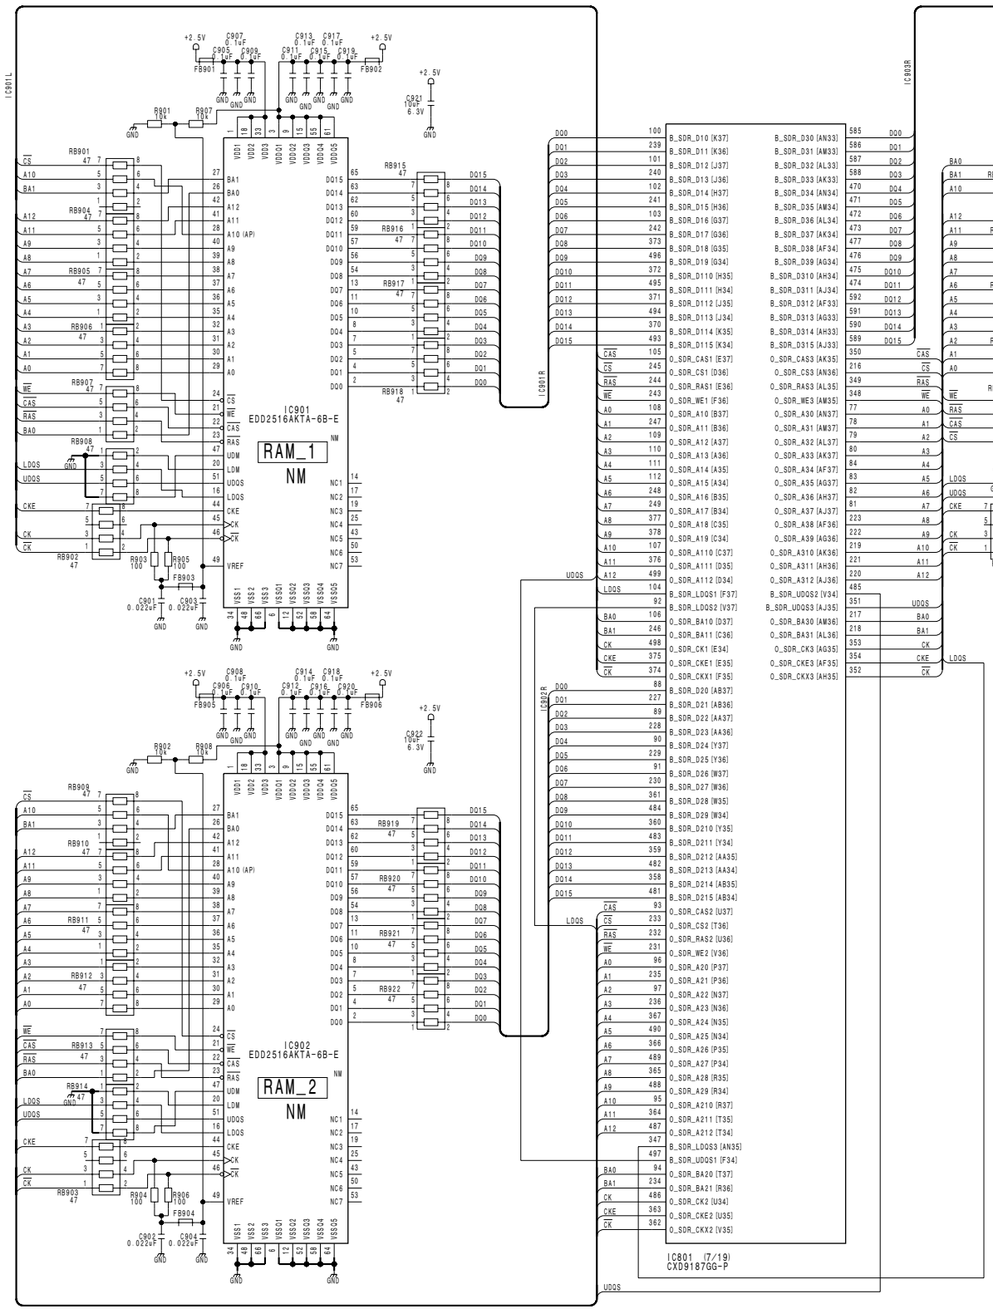



7-62

**DPR-271B (8/9)**
SUFFIX: -11

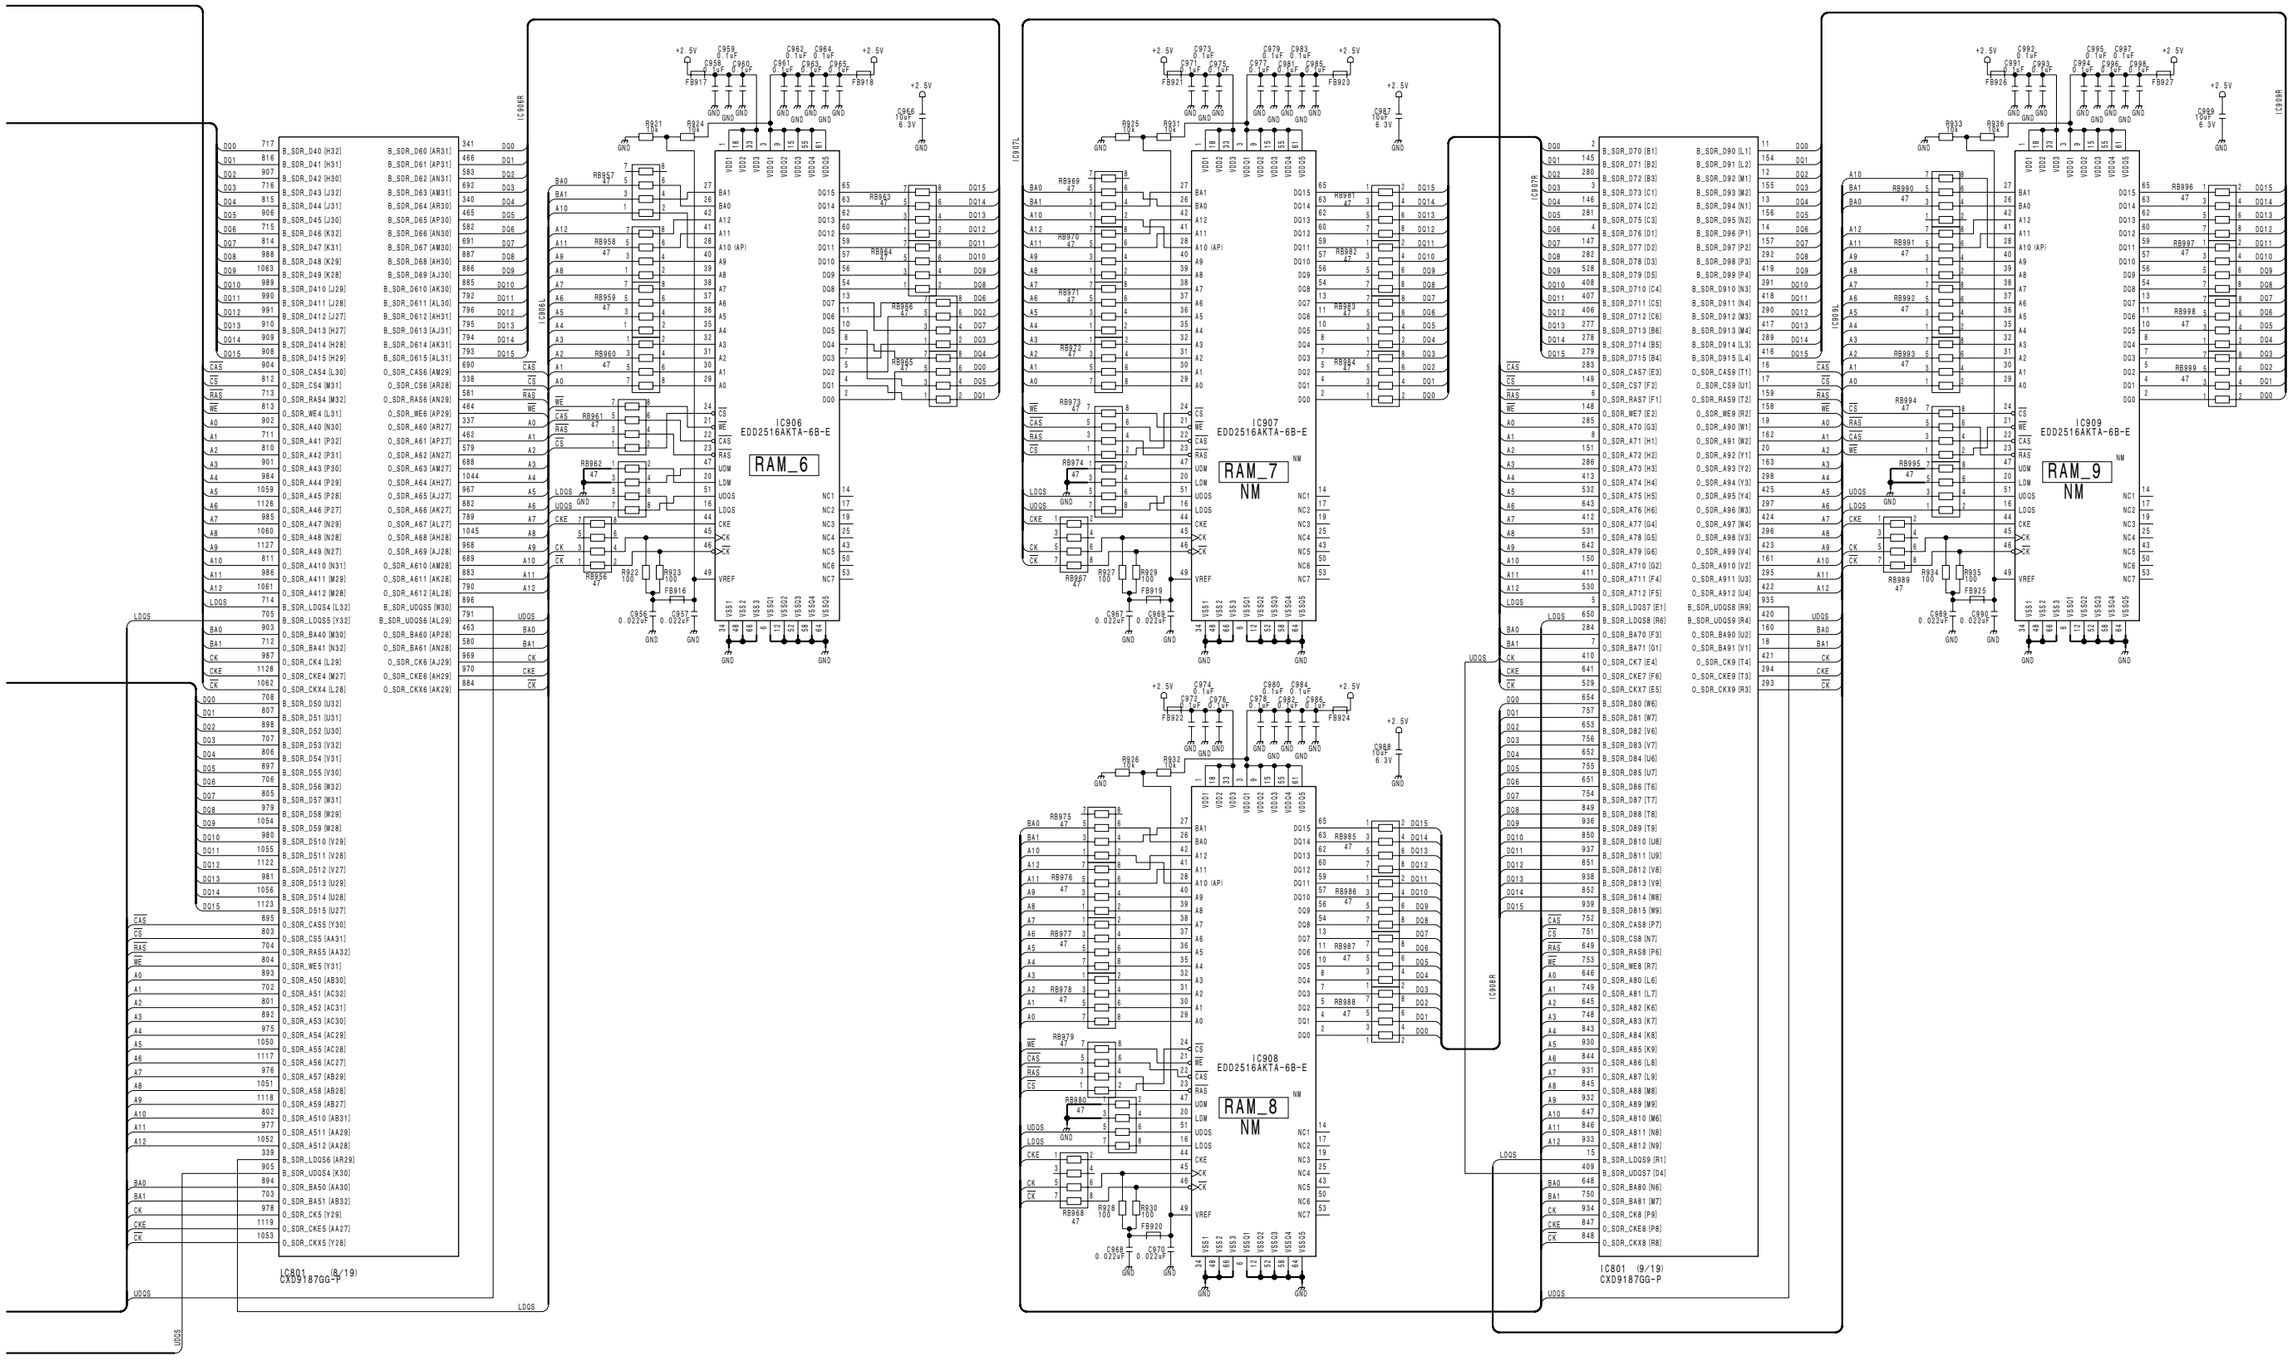

**DPR-271B (9/9)** **SUFFIX: -11**

SDI-A_IN

SDI-B_IN

SDI_A-OUT

From SDP CN1

From SDP CN1

IC1001 GS1561-CFE3

IC1002 GS1561-CFE3

IC1003 GS1531-CBE2

CN1 (N.C.)

| | | |
|---|---|---|
| CN1 (25/135) | a1 | NC |
| CN1 (5/135) | a2 | NC |
| CN1 (8/135) | a3 | NC |
| CN1 (9/135) | a4 | NC |
| CN1 (10/135) | a5 | NC |
| CN1 (11/135) | b1 | NC |
| CN1 (13/135) | b2 | NC |
| CN1 (14/135) | b3 | NC |
| CN1 (15/135) | b4 | NC |
| CN1 (20/135) | c1 | NC |
| CN1 (21/135) | c2 | NC |
| CN1 (26/135) | c3 | NC |
| CN1 (27/135) | c4 | NC |
| | c5 | NC |

DPR-271B (9/9)
SUFFIX: -11

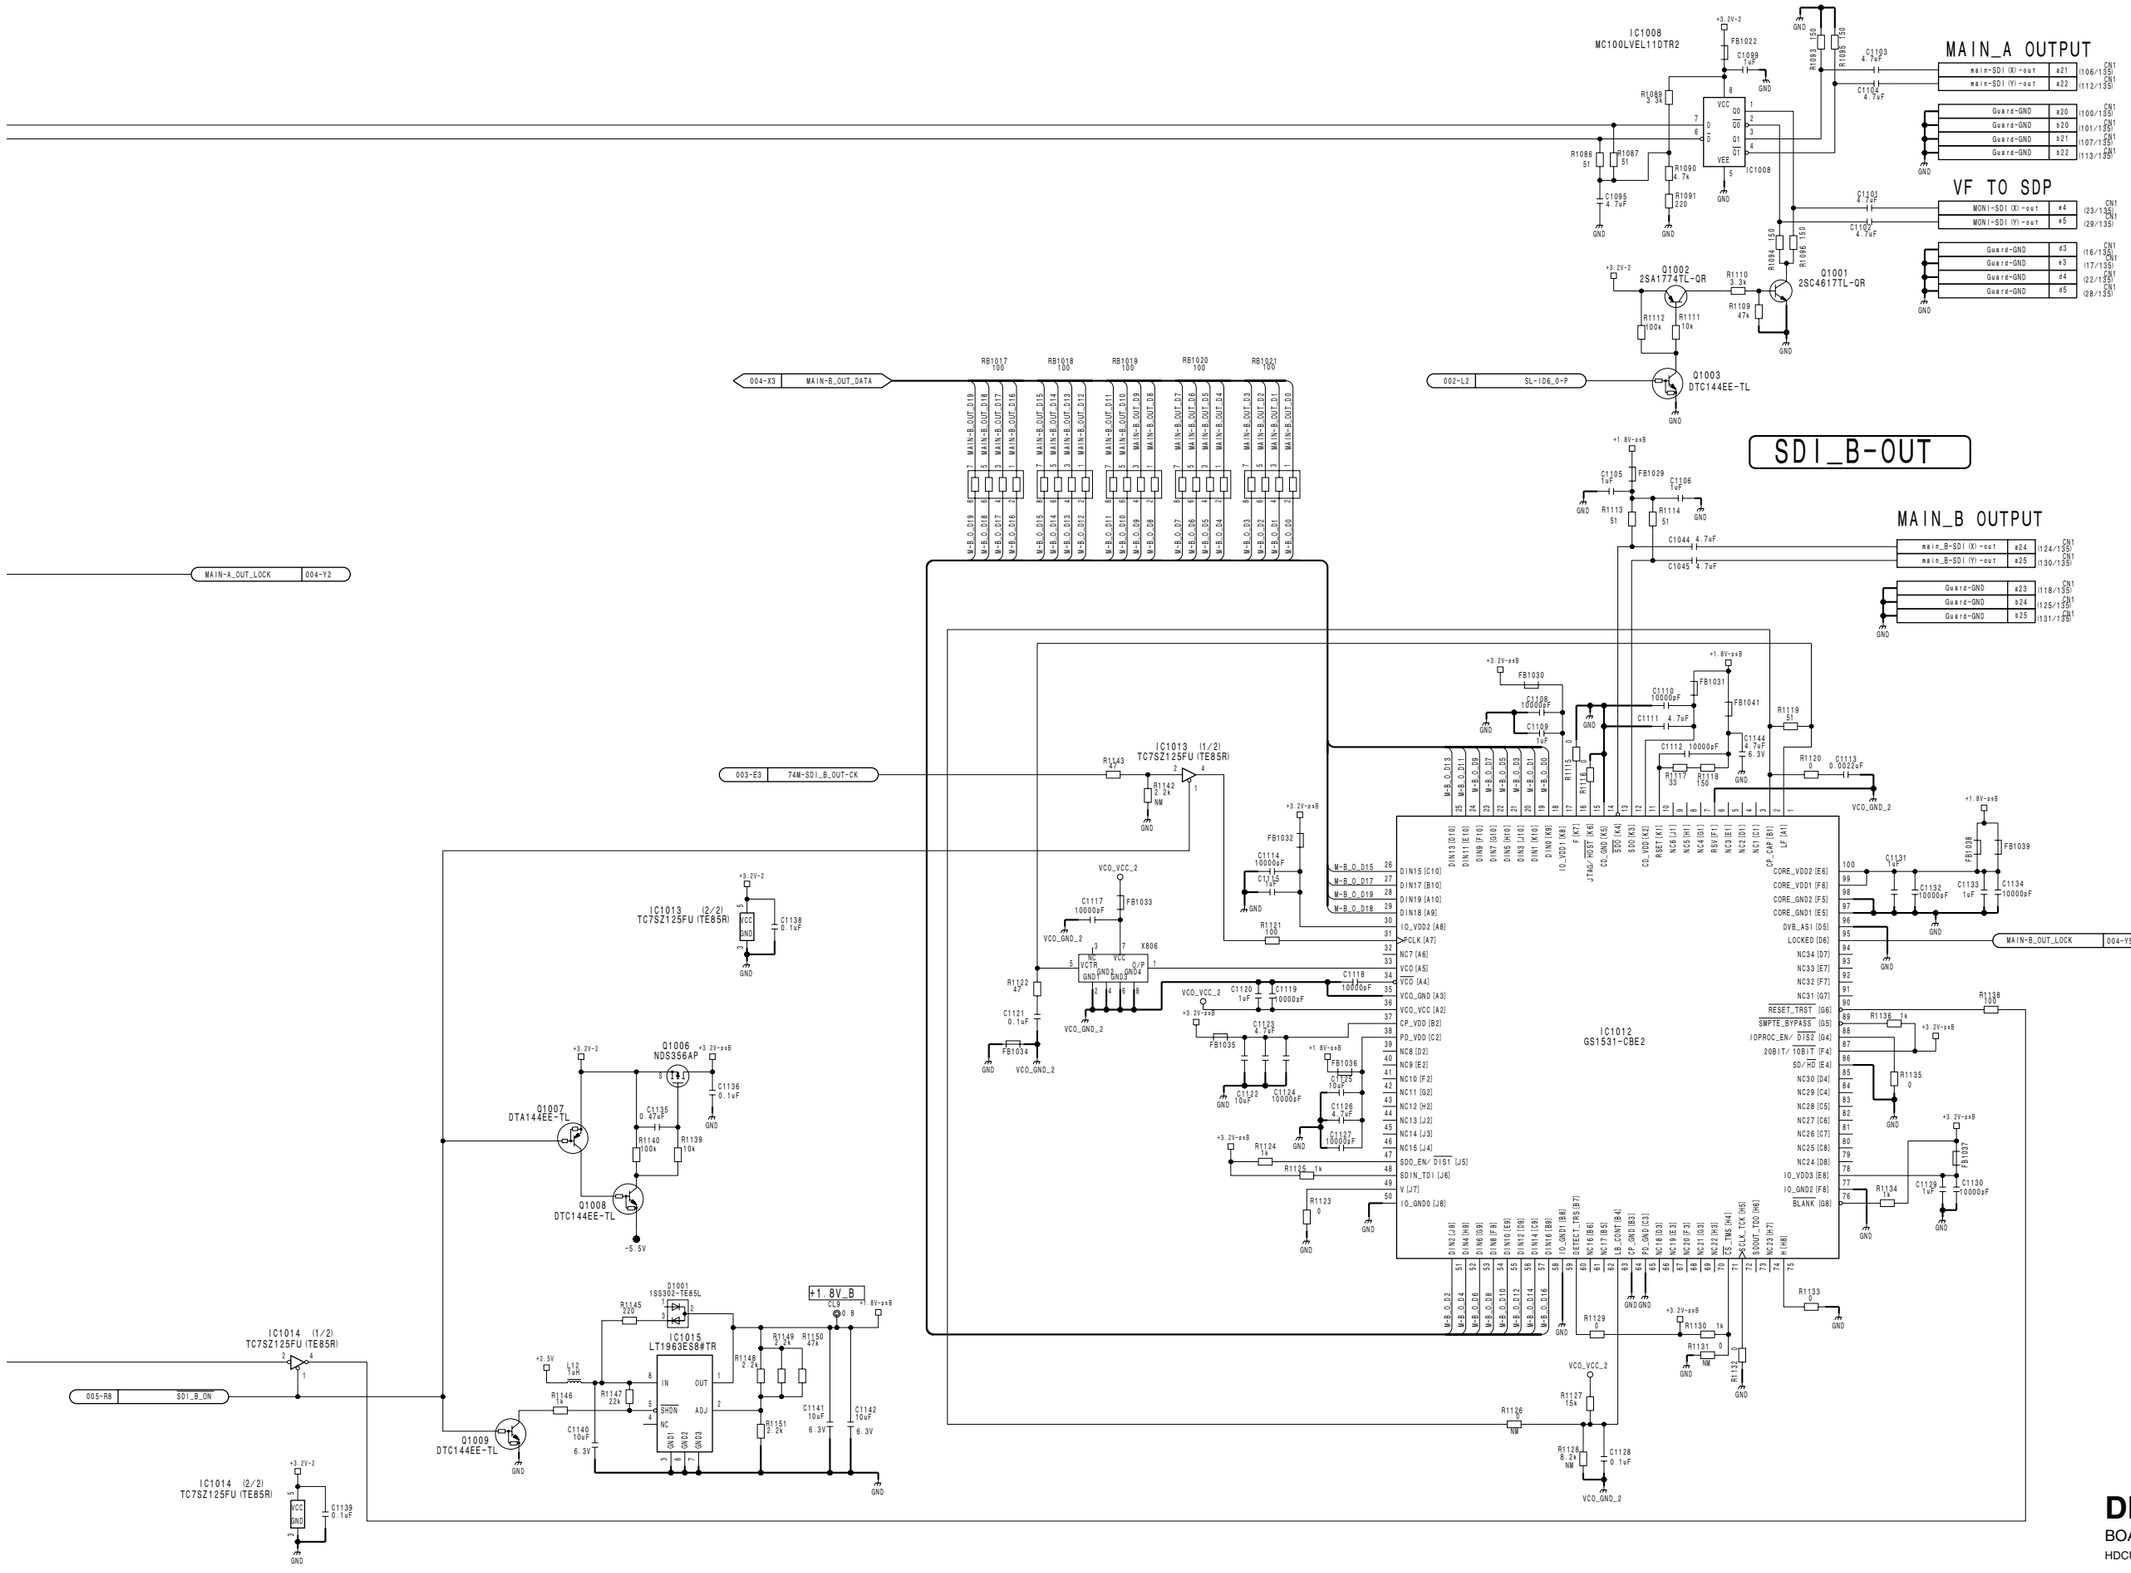

# DRX-5 (1/9)
**SUFFIX: -13**

DRX-5 (1/9)
SUFFIX: -13

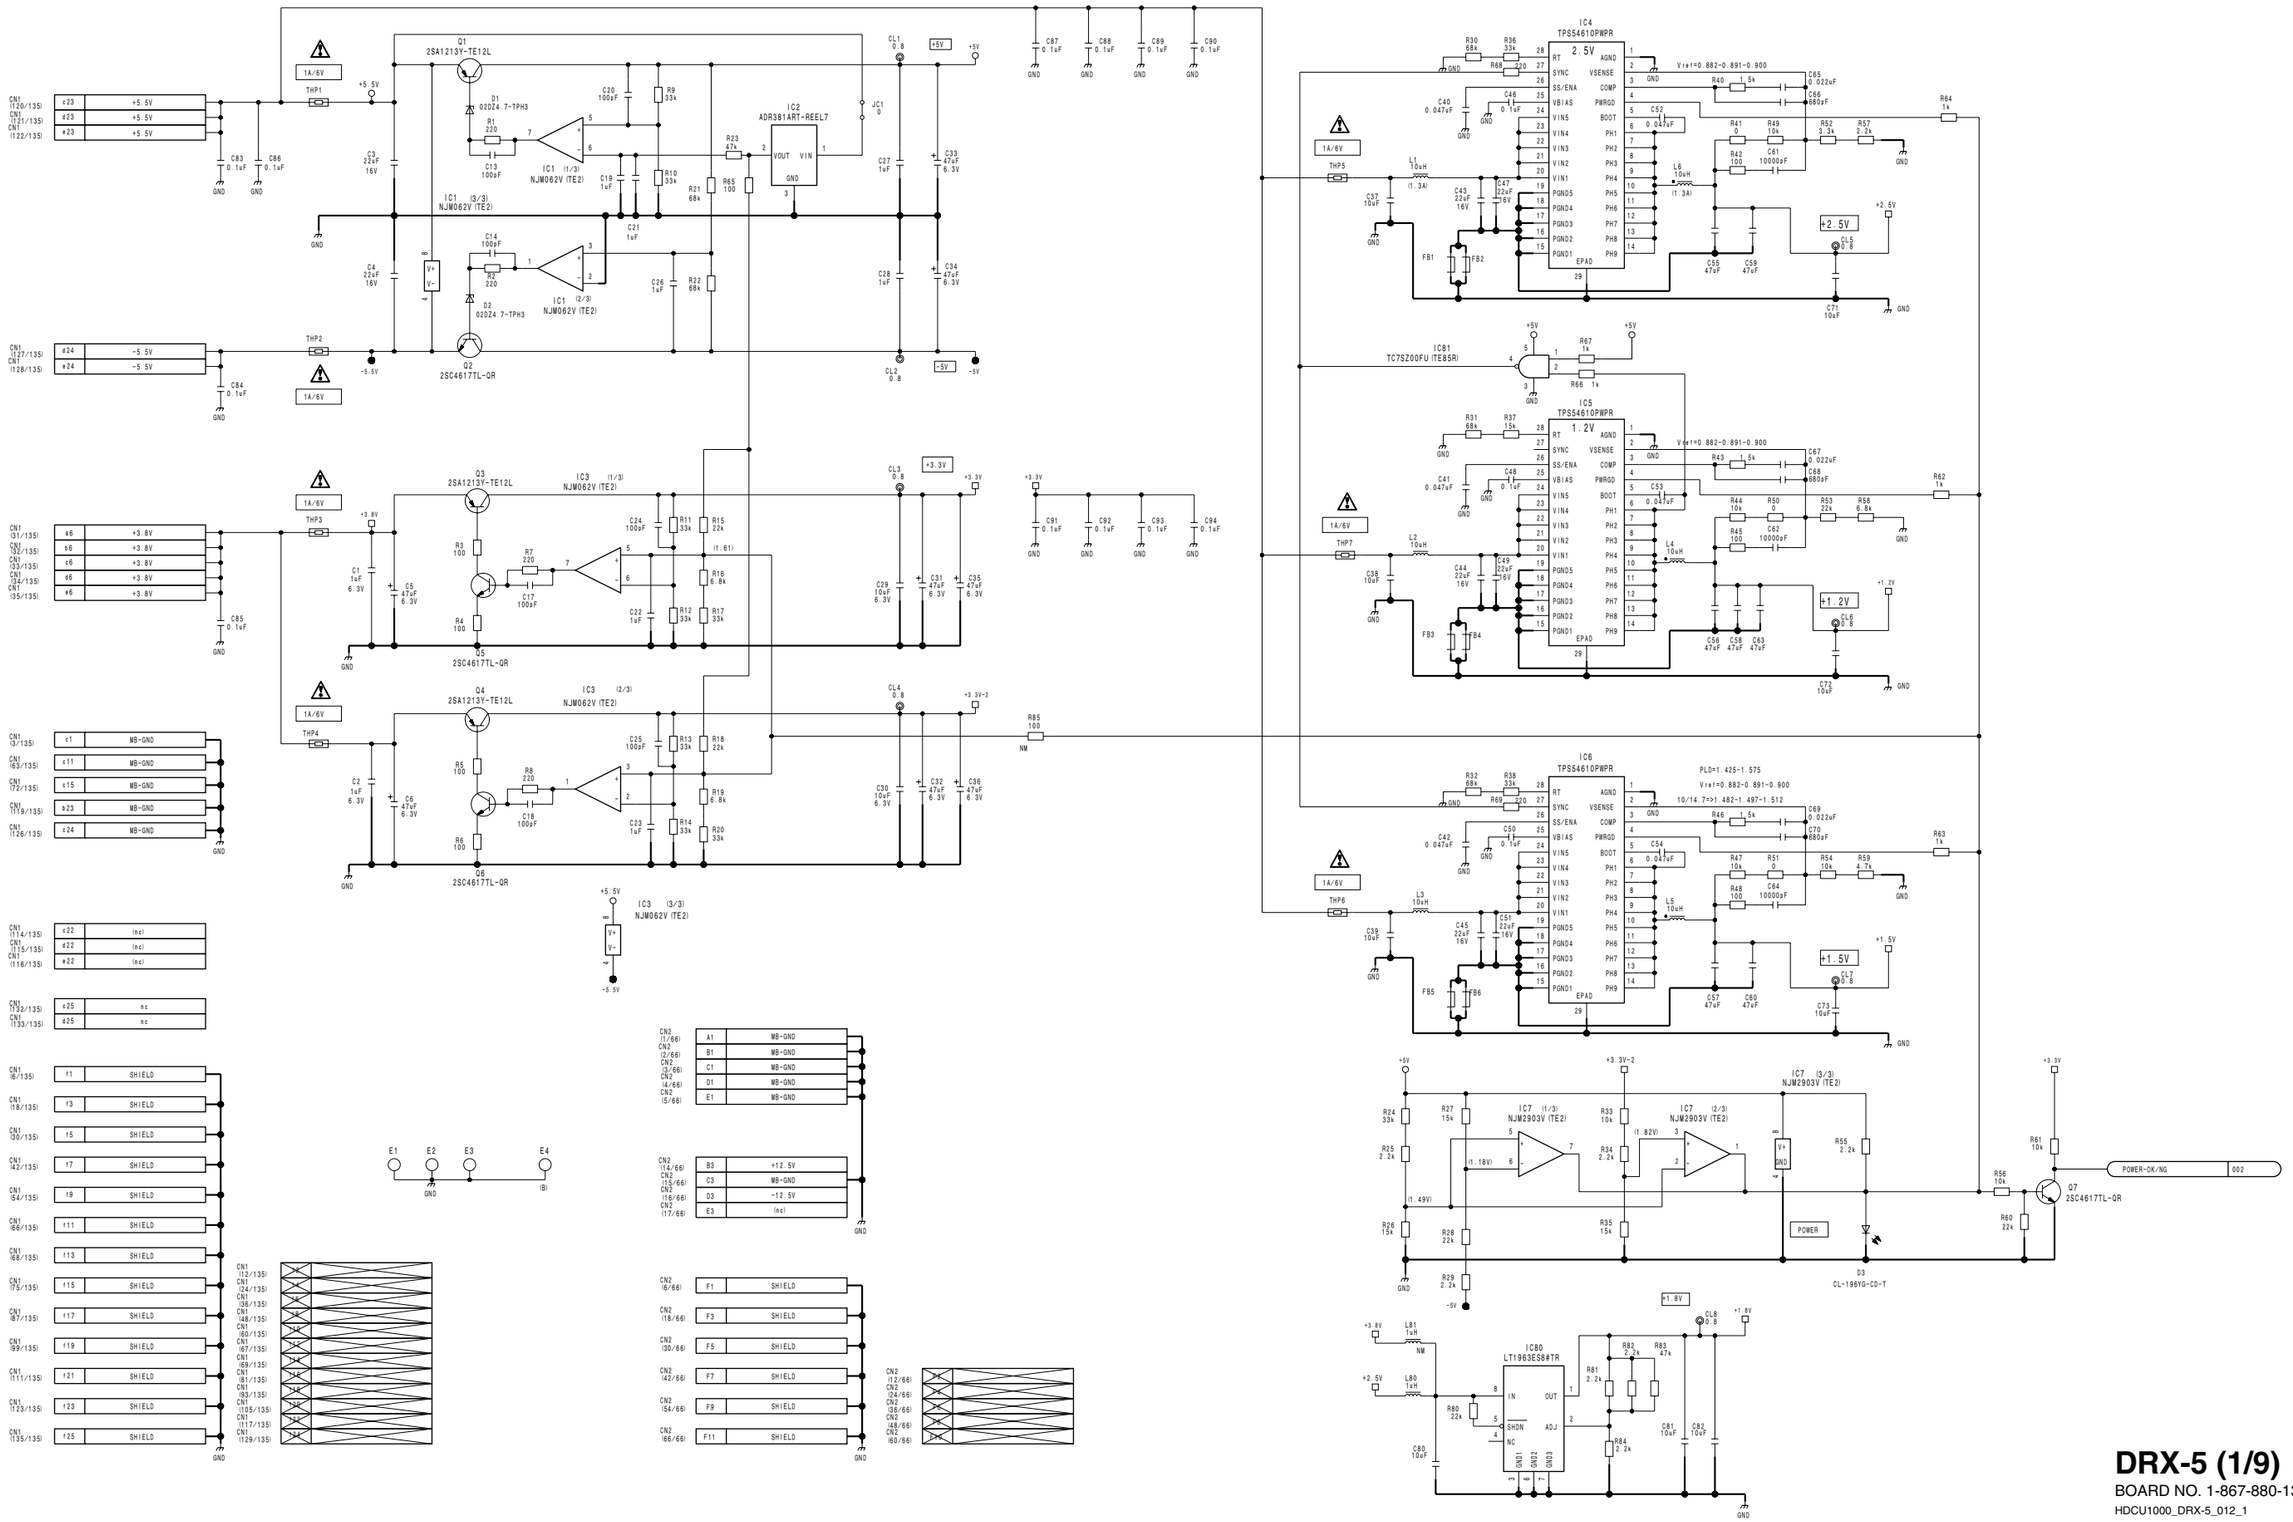




7-66

## DRX-5 (1/9)
BOARD NO. 1-867-880-13
HDCU1000_DRX-5_012_1

HDCU3300/MM (J,E)

# DRX-5 (2/9)
SUFFIX: -13

DRX-5 (2/9)
SUFFIX: -13

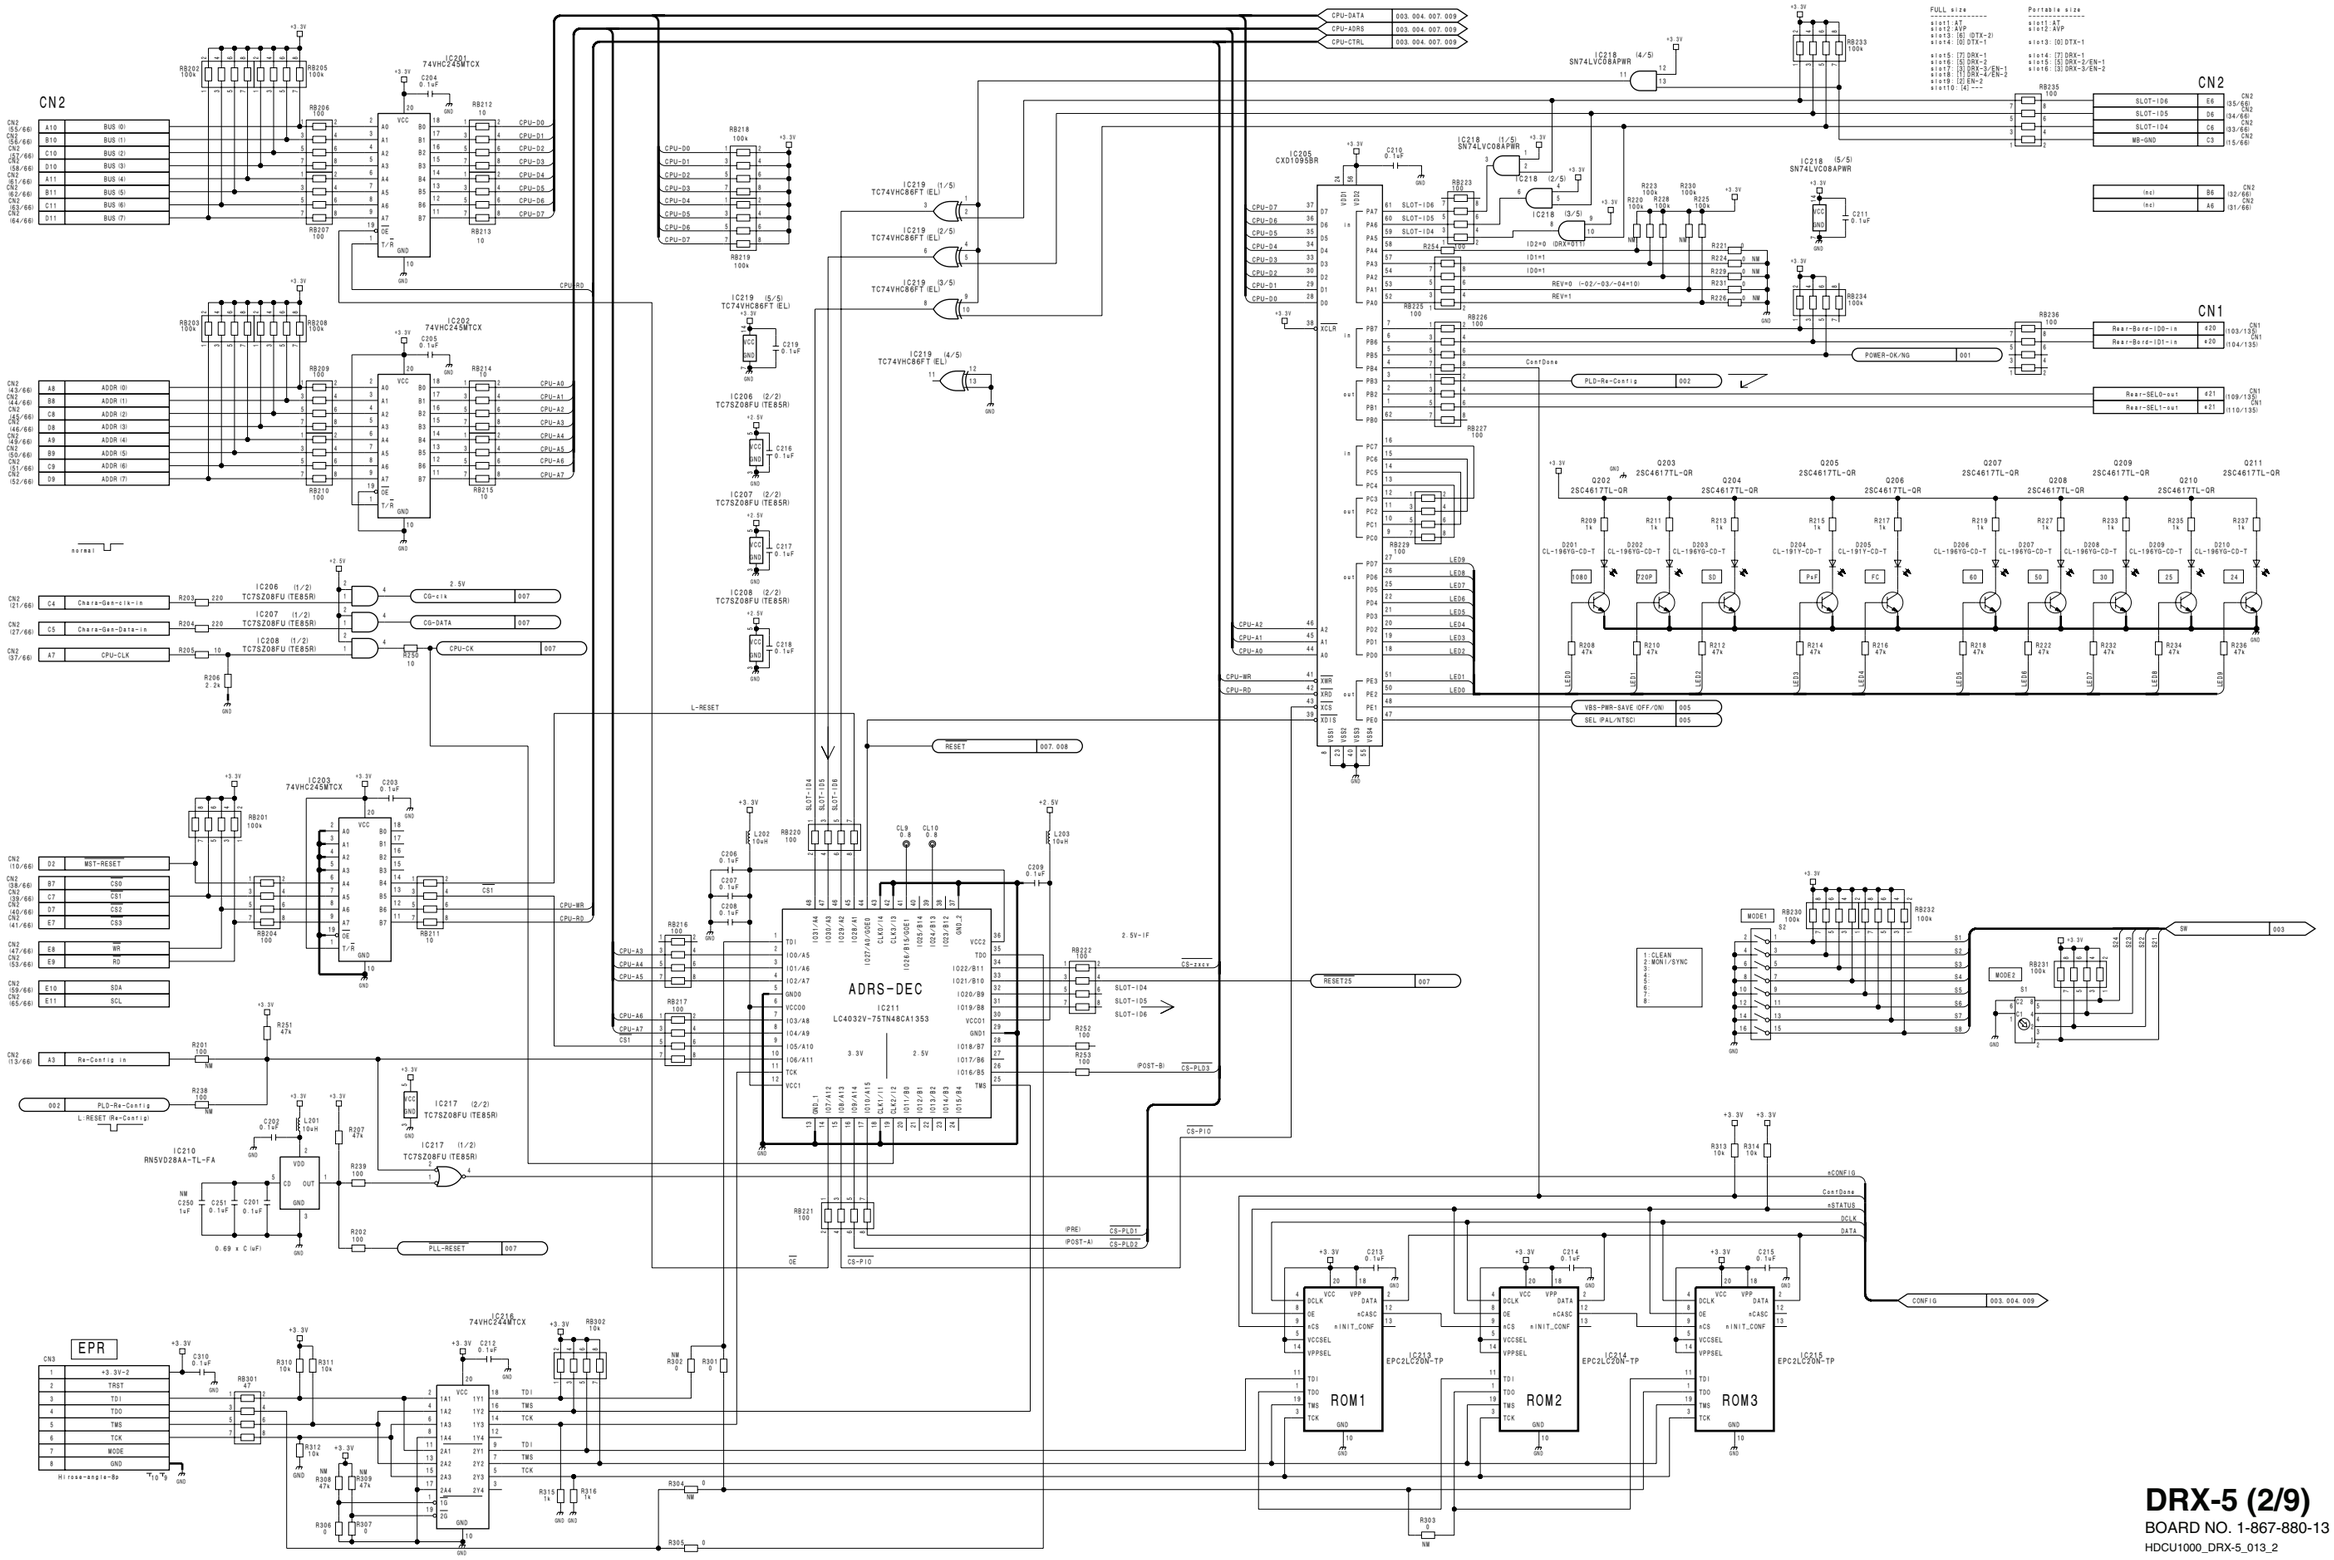


HDCU3300/MM (J,E)



7-67

# DRX-5 (2/9)
BOARD NO. 1-867-880-13
HDCU1000_DRX-5_013_2

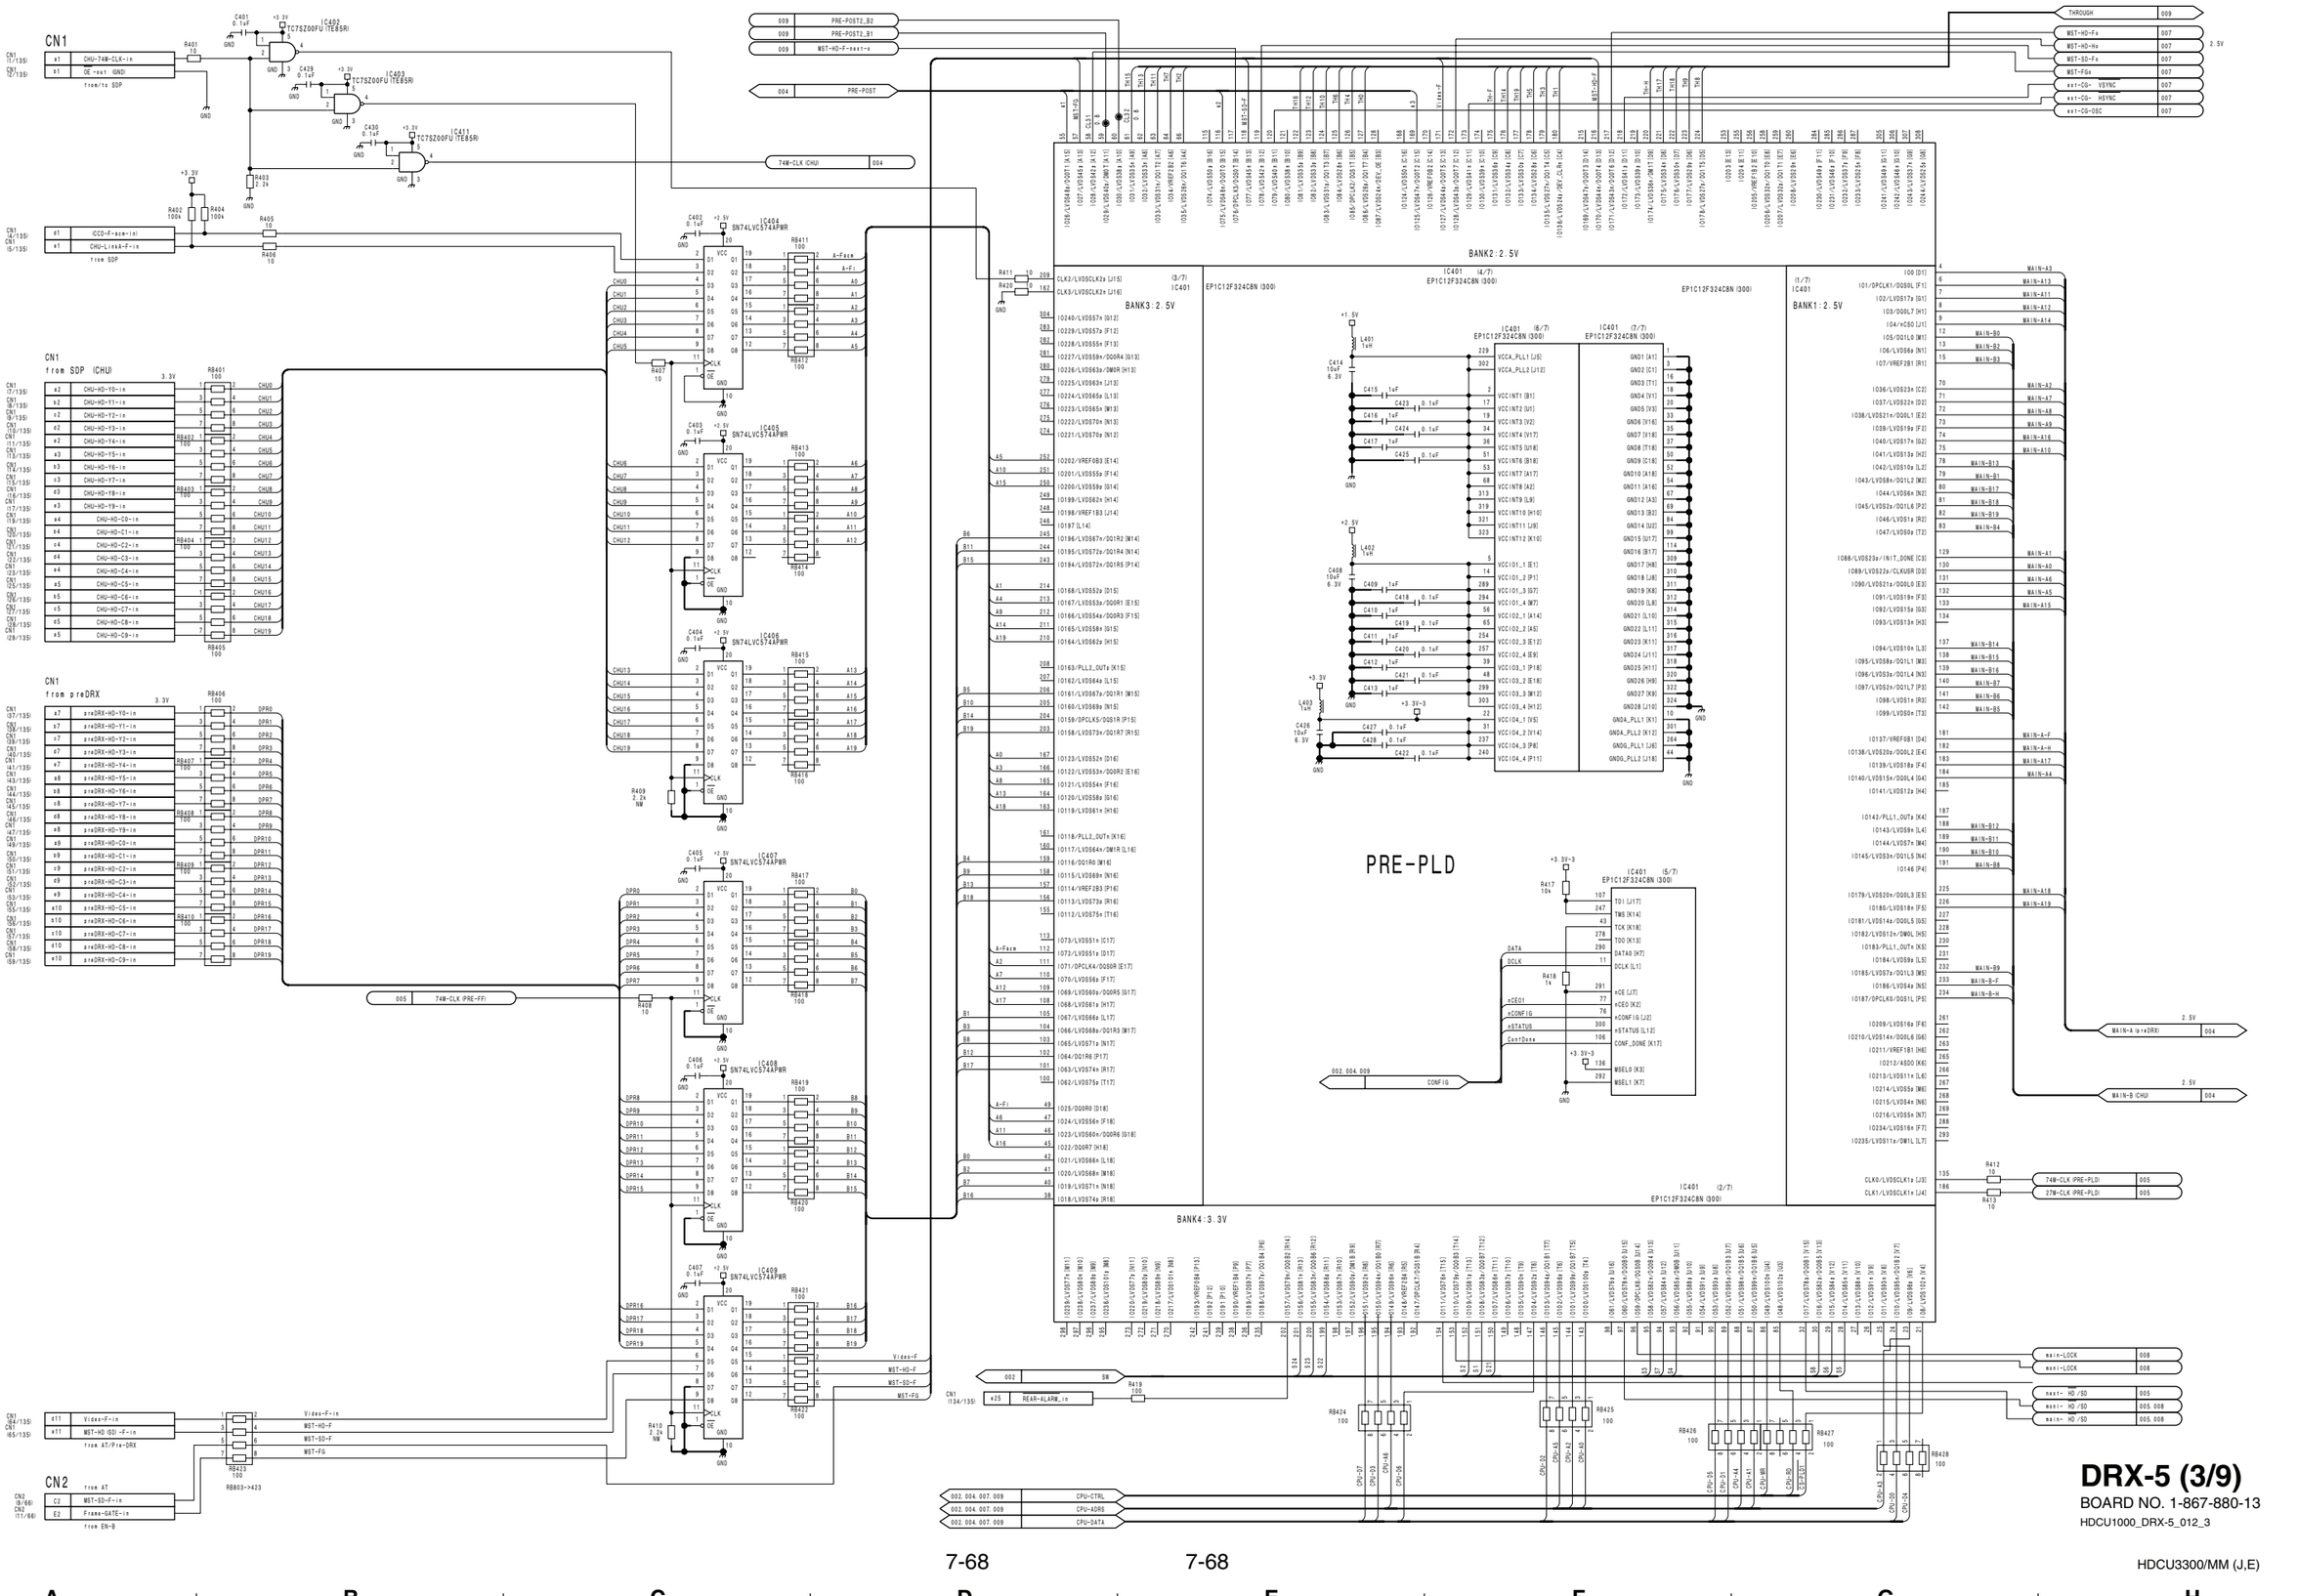




**DRX-5 (3/9)**
BOARD NO. 1-867-880-13
HDCU1000_DRX-5_012_3

# DRX-5 (4/9)
SUFFIX: -13

DRX-5 (4/9)
SUFFIX: -13

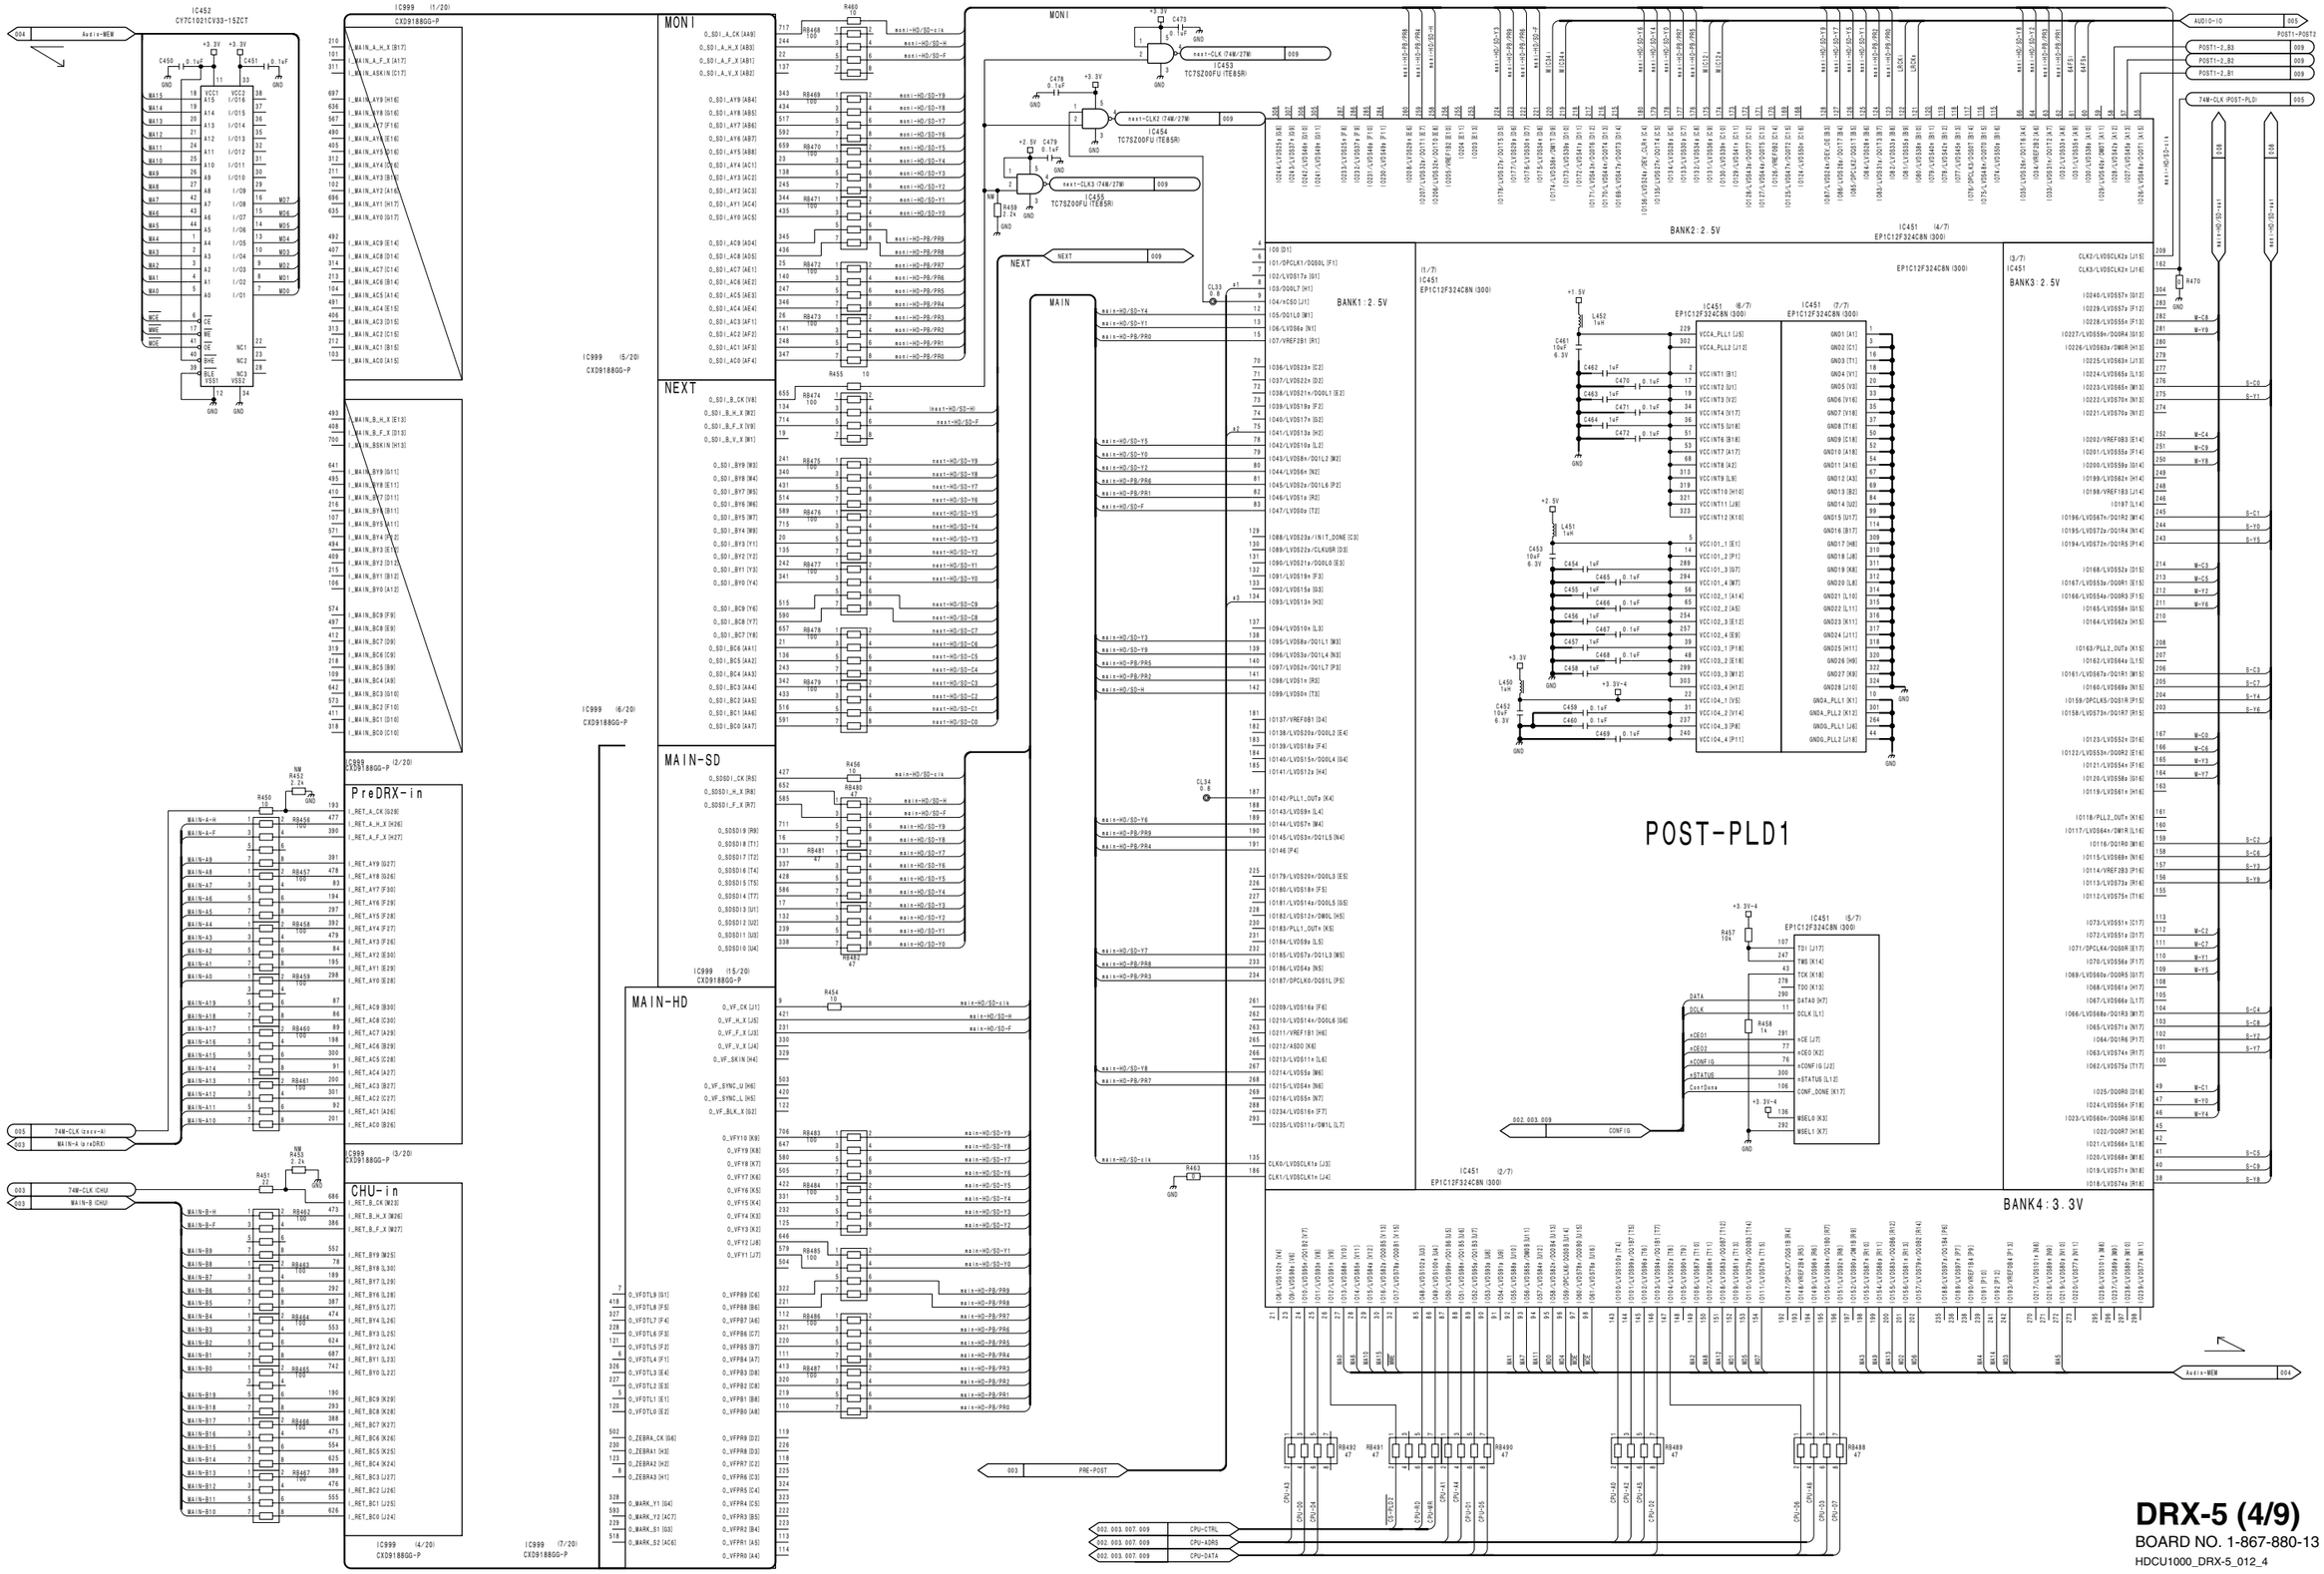


HDCU3300/MM (J,E)



7-69

**DRX-5 (4/9)**
BOARD NO. 1-867-880-13
HDCU1000_DRX-5_012_4

# DRX-5 (5/9)
**SUFFIX: -13**

DRX-5 (5/9)
SUFFIX: -13

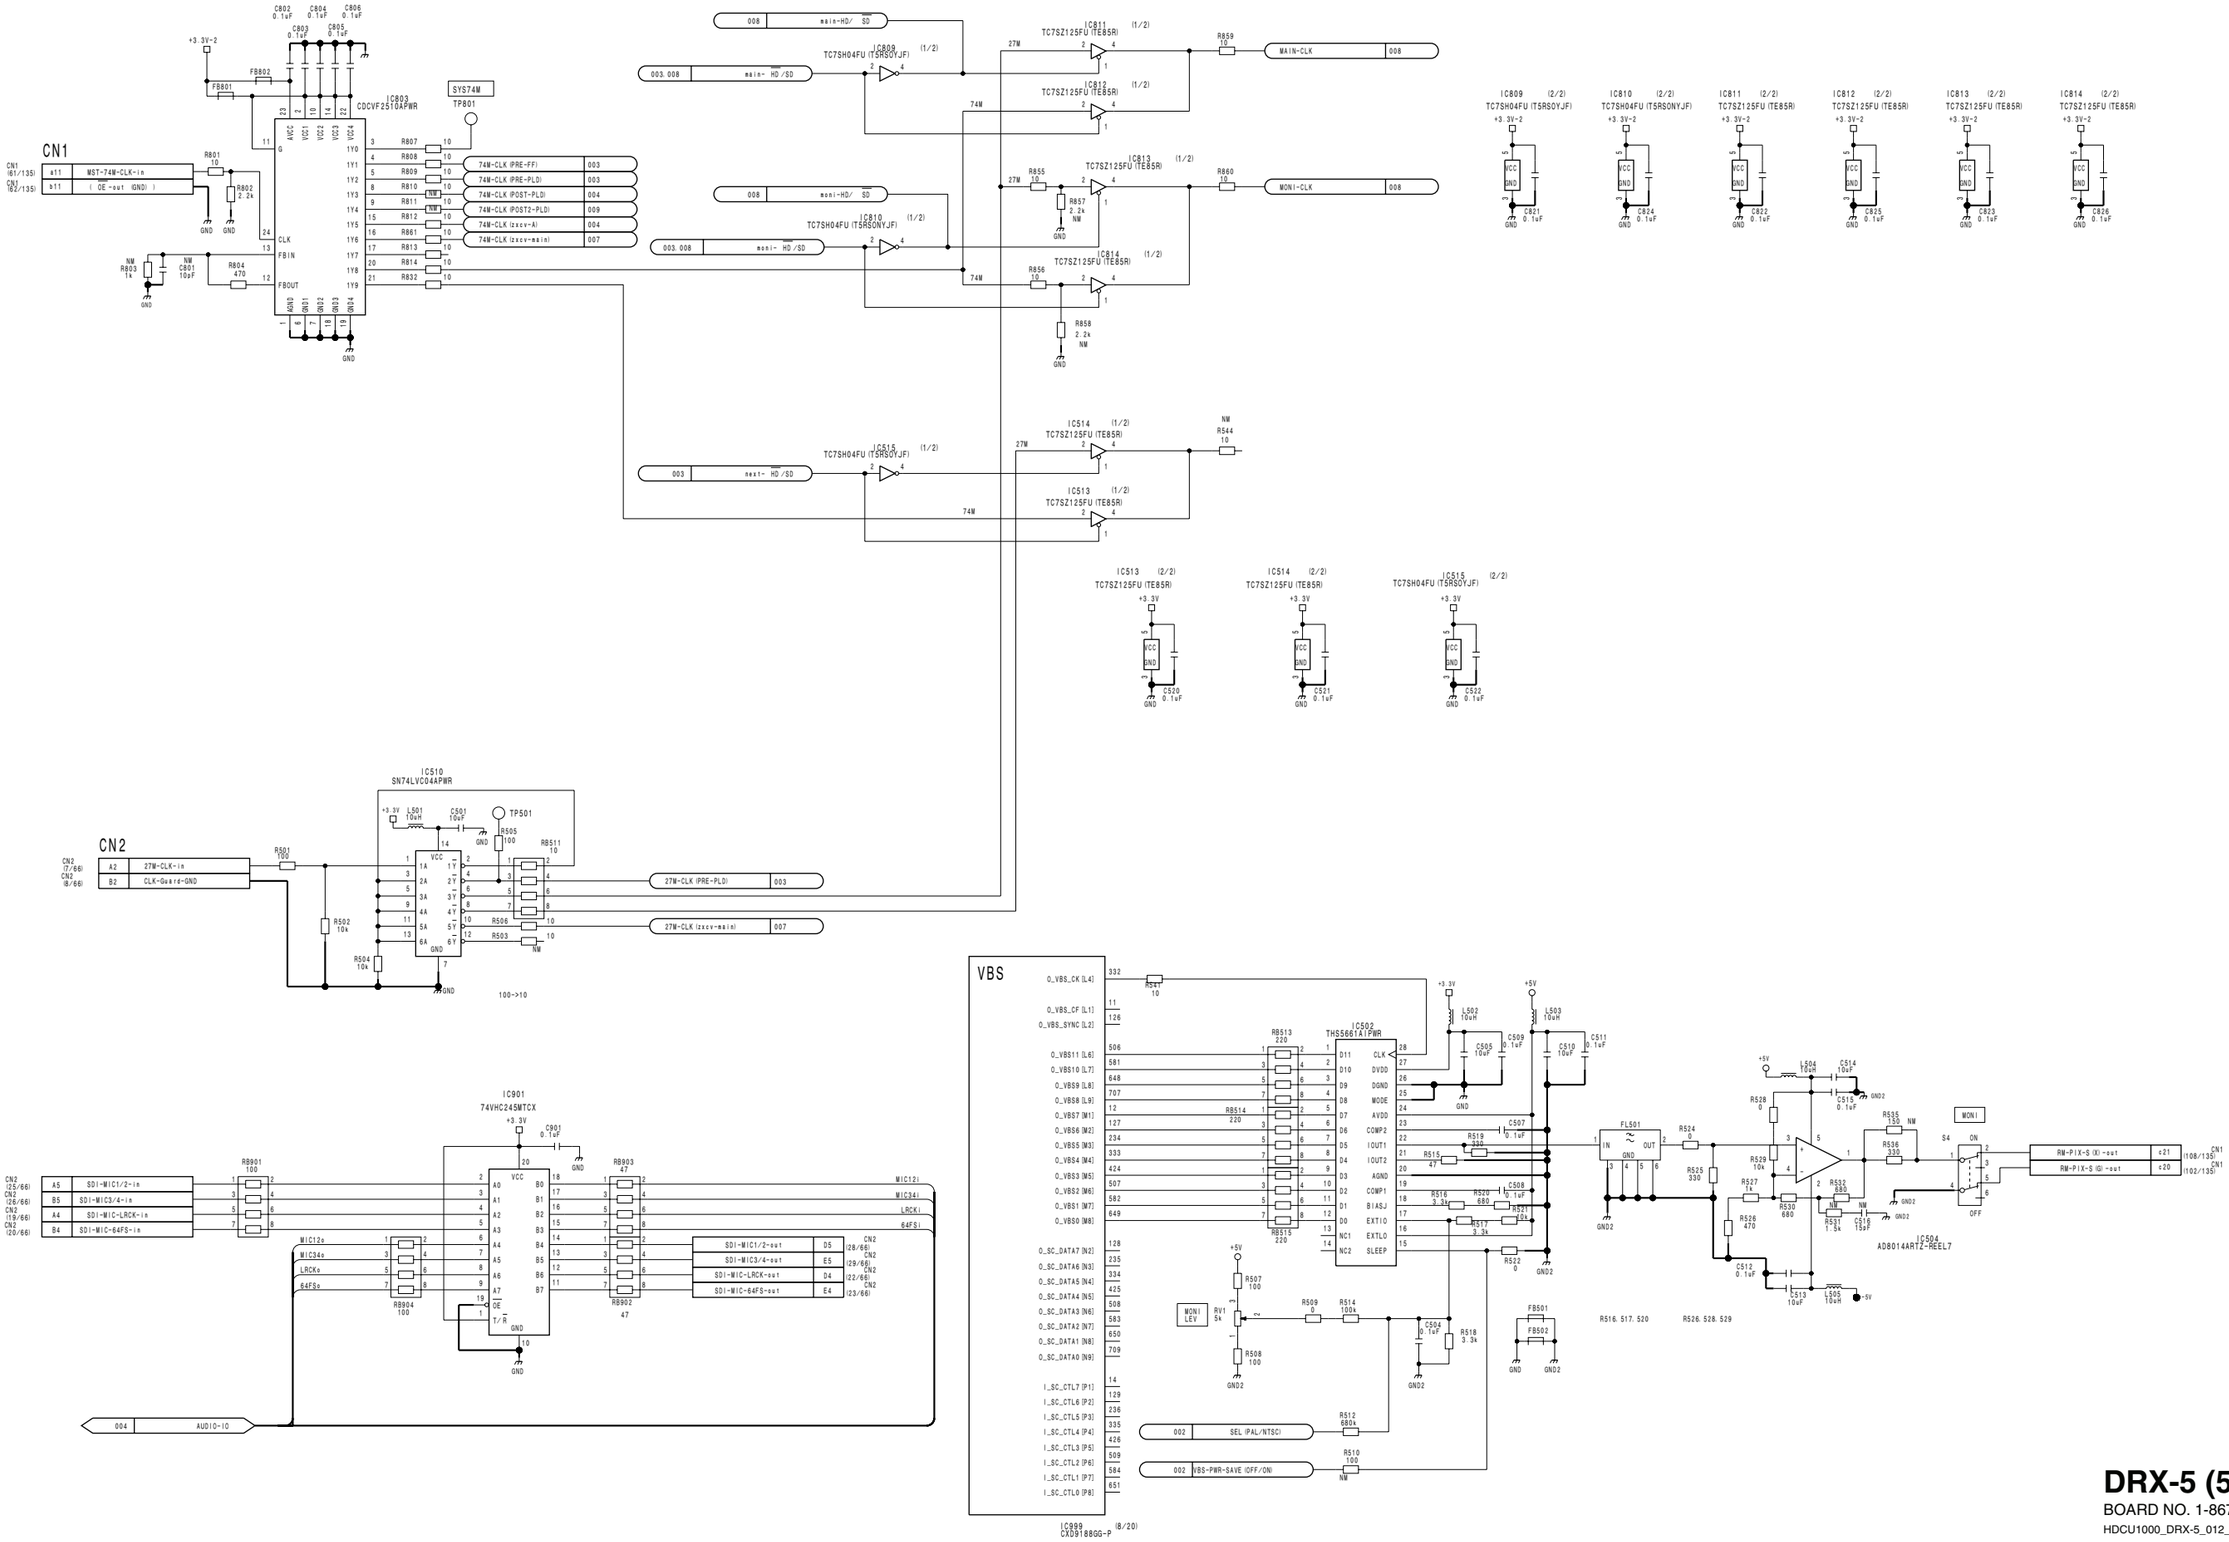




7-70

## DRX-5 (5/9)
BOARD NO. 1-867-880-13
HDCU1000_DRX-5_012_5

HDCU3300/MM (J,E)

DRX-5 (6/9)
SUFFIX: -13

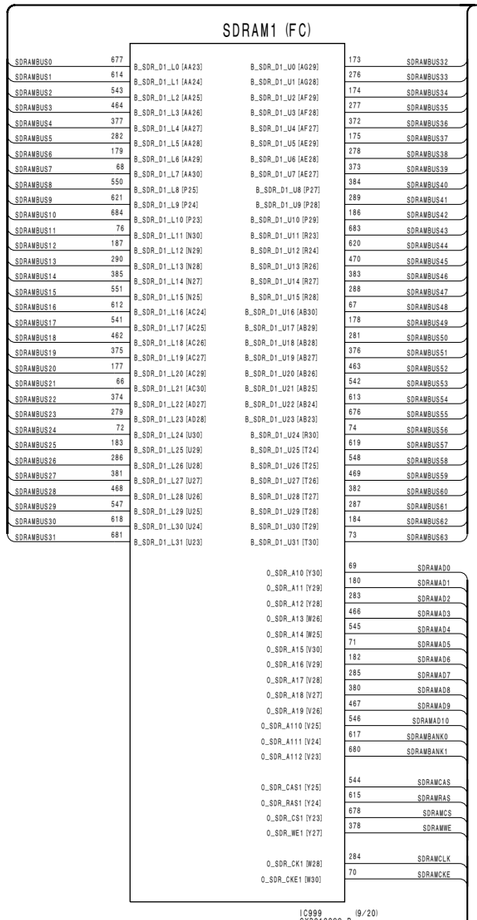


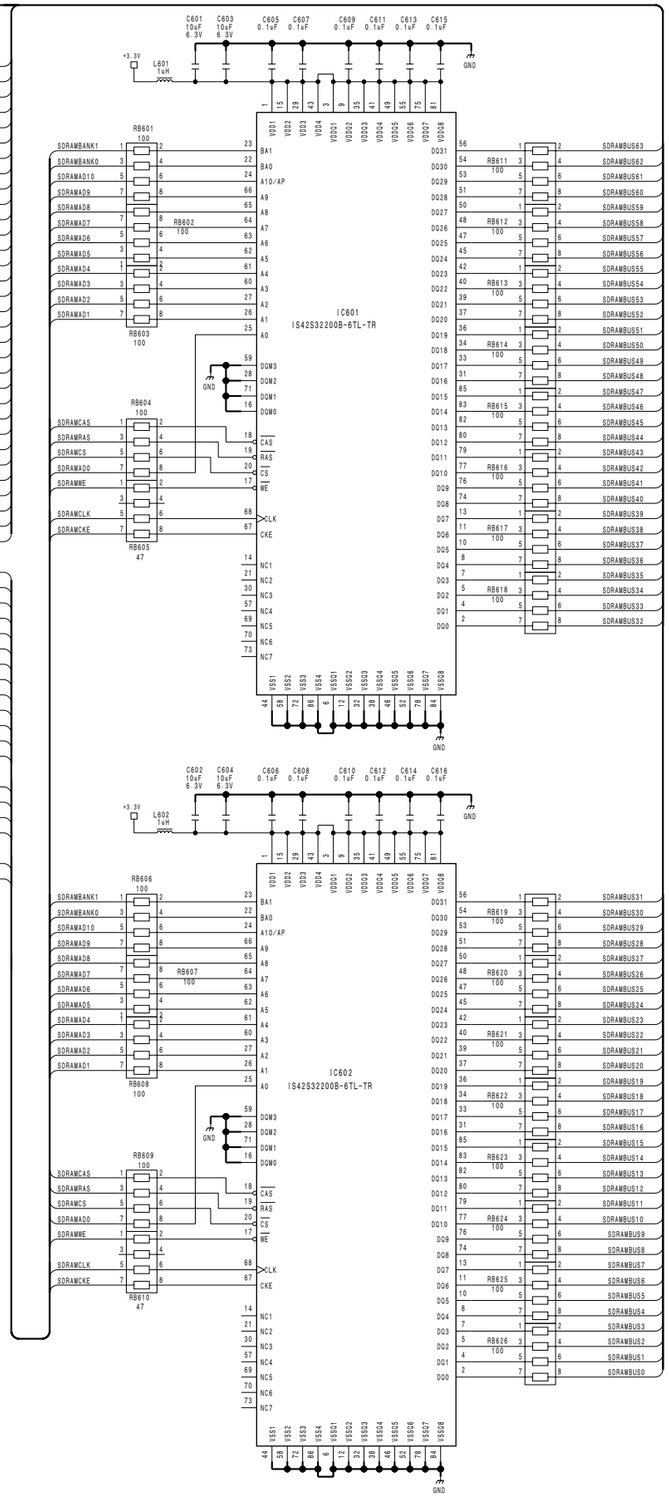


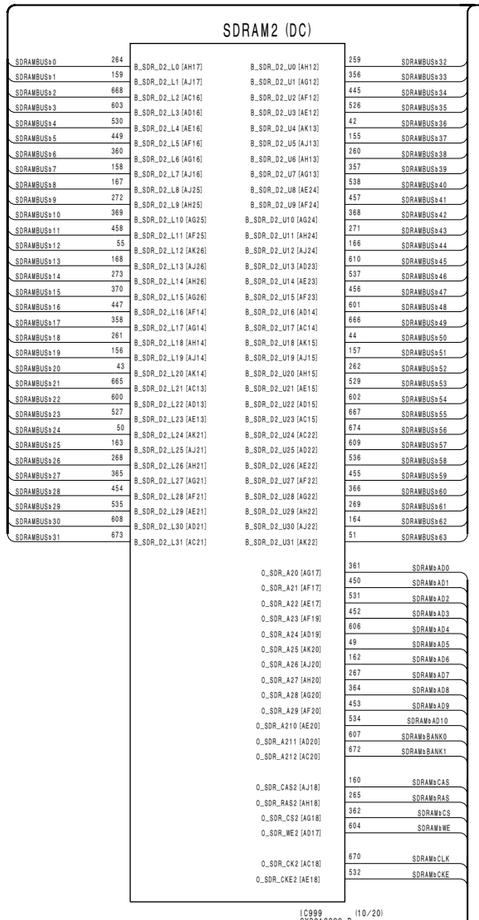


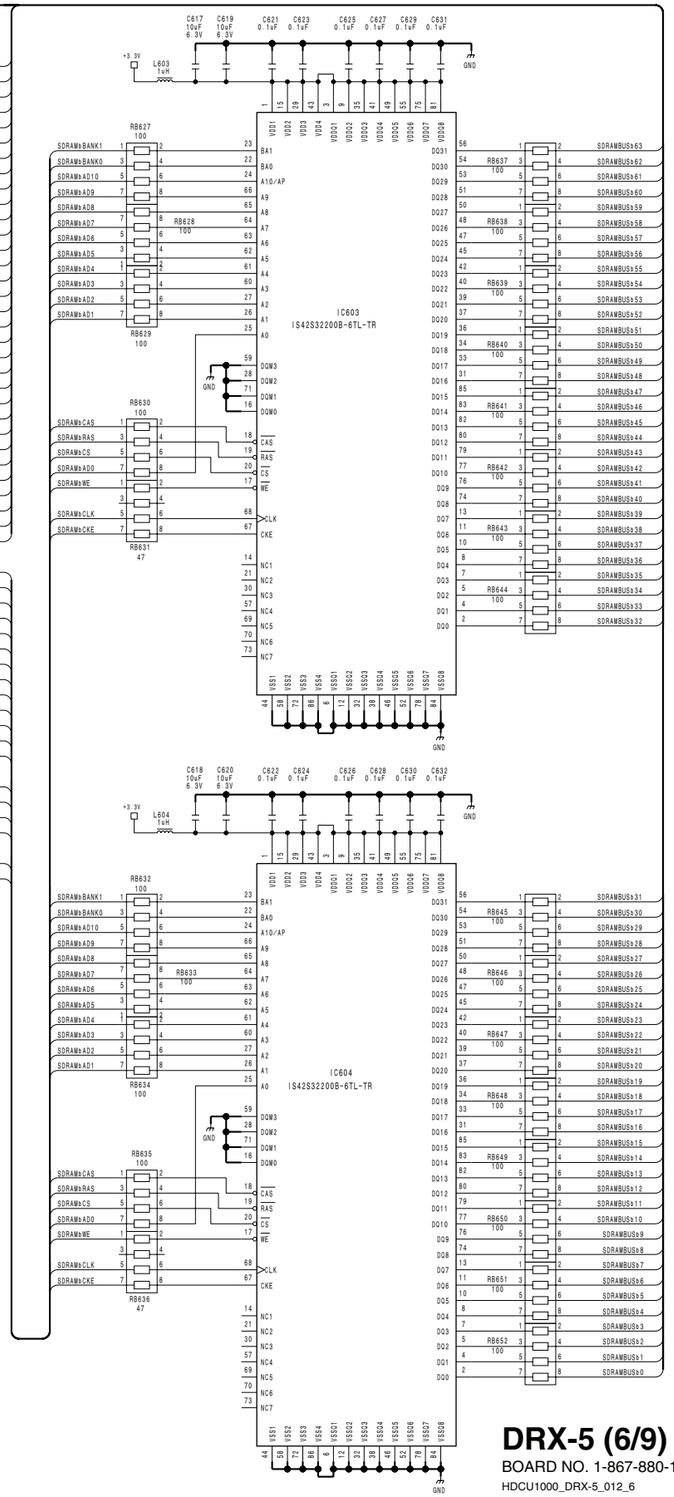


**DRX-5 (6/9)**
BOARD NO. 1-867-880-13
HDCU1000_DRX-5_012_6

**DRX-5 (7/9)**
**SUFFIX: -13**

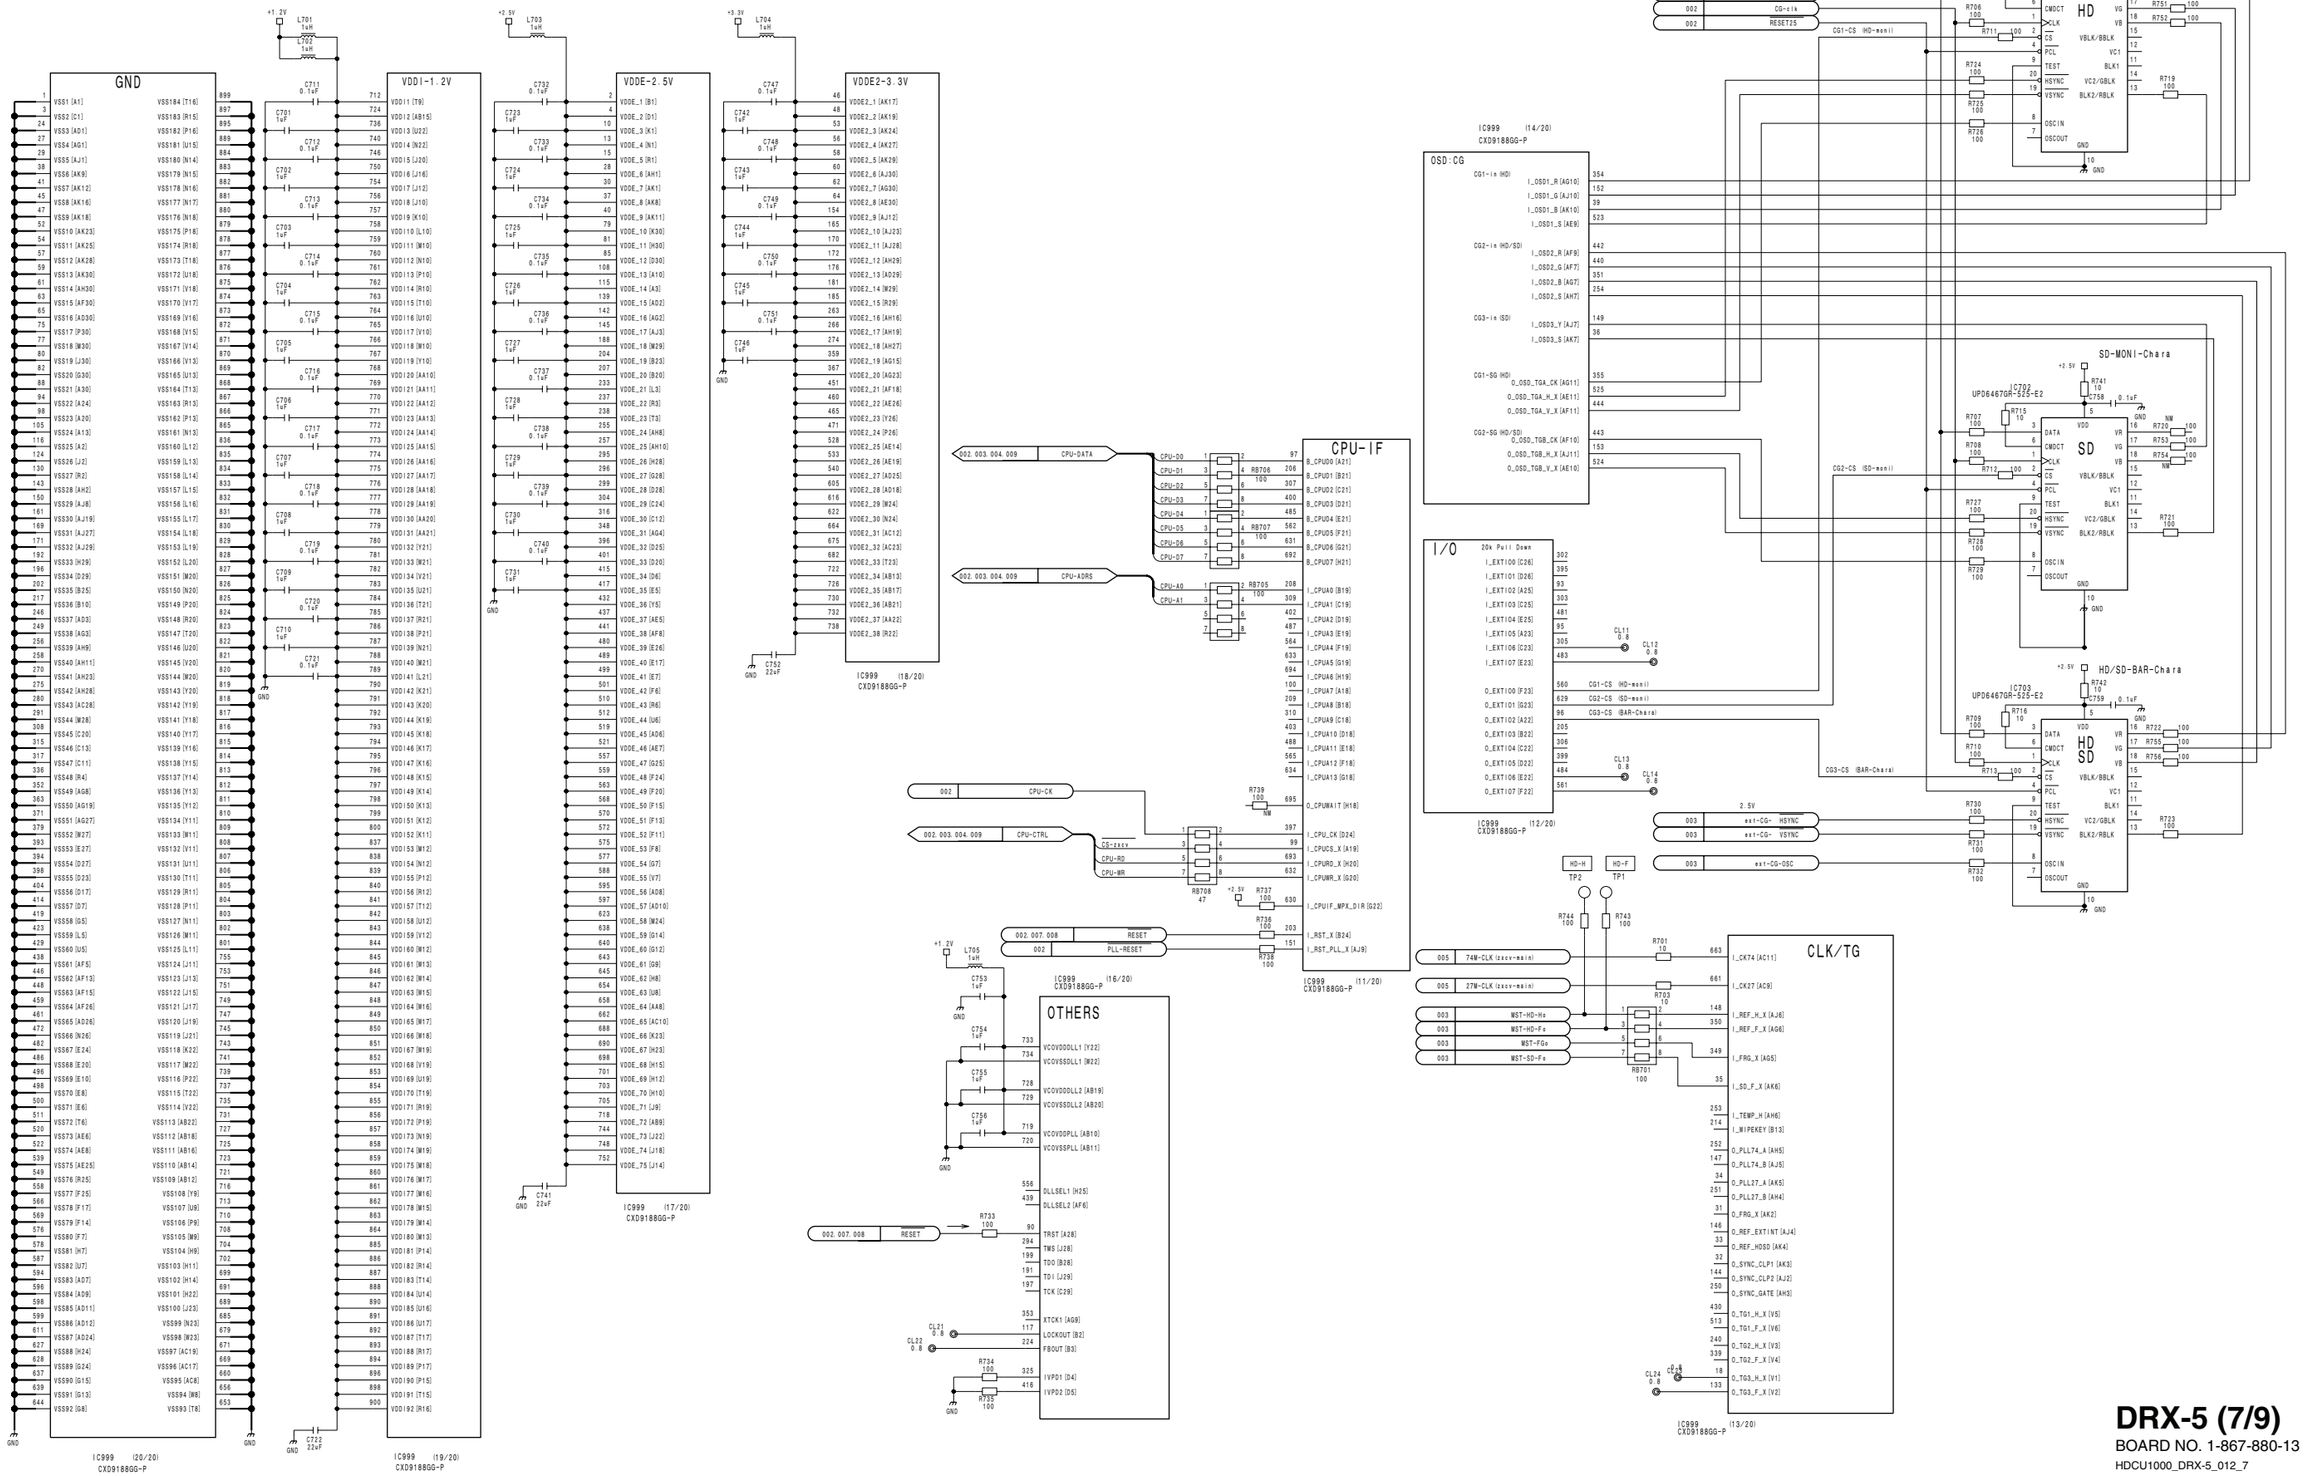



7-72

**DRX-5 (7/9)**
BOARD NO. 1-867-880-13
HDCU1000_DRX-5_012_7

HDCU3300/MM (J,E)

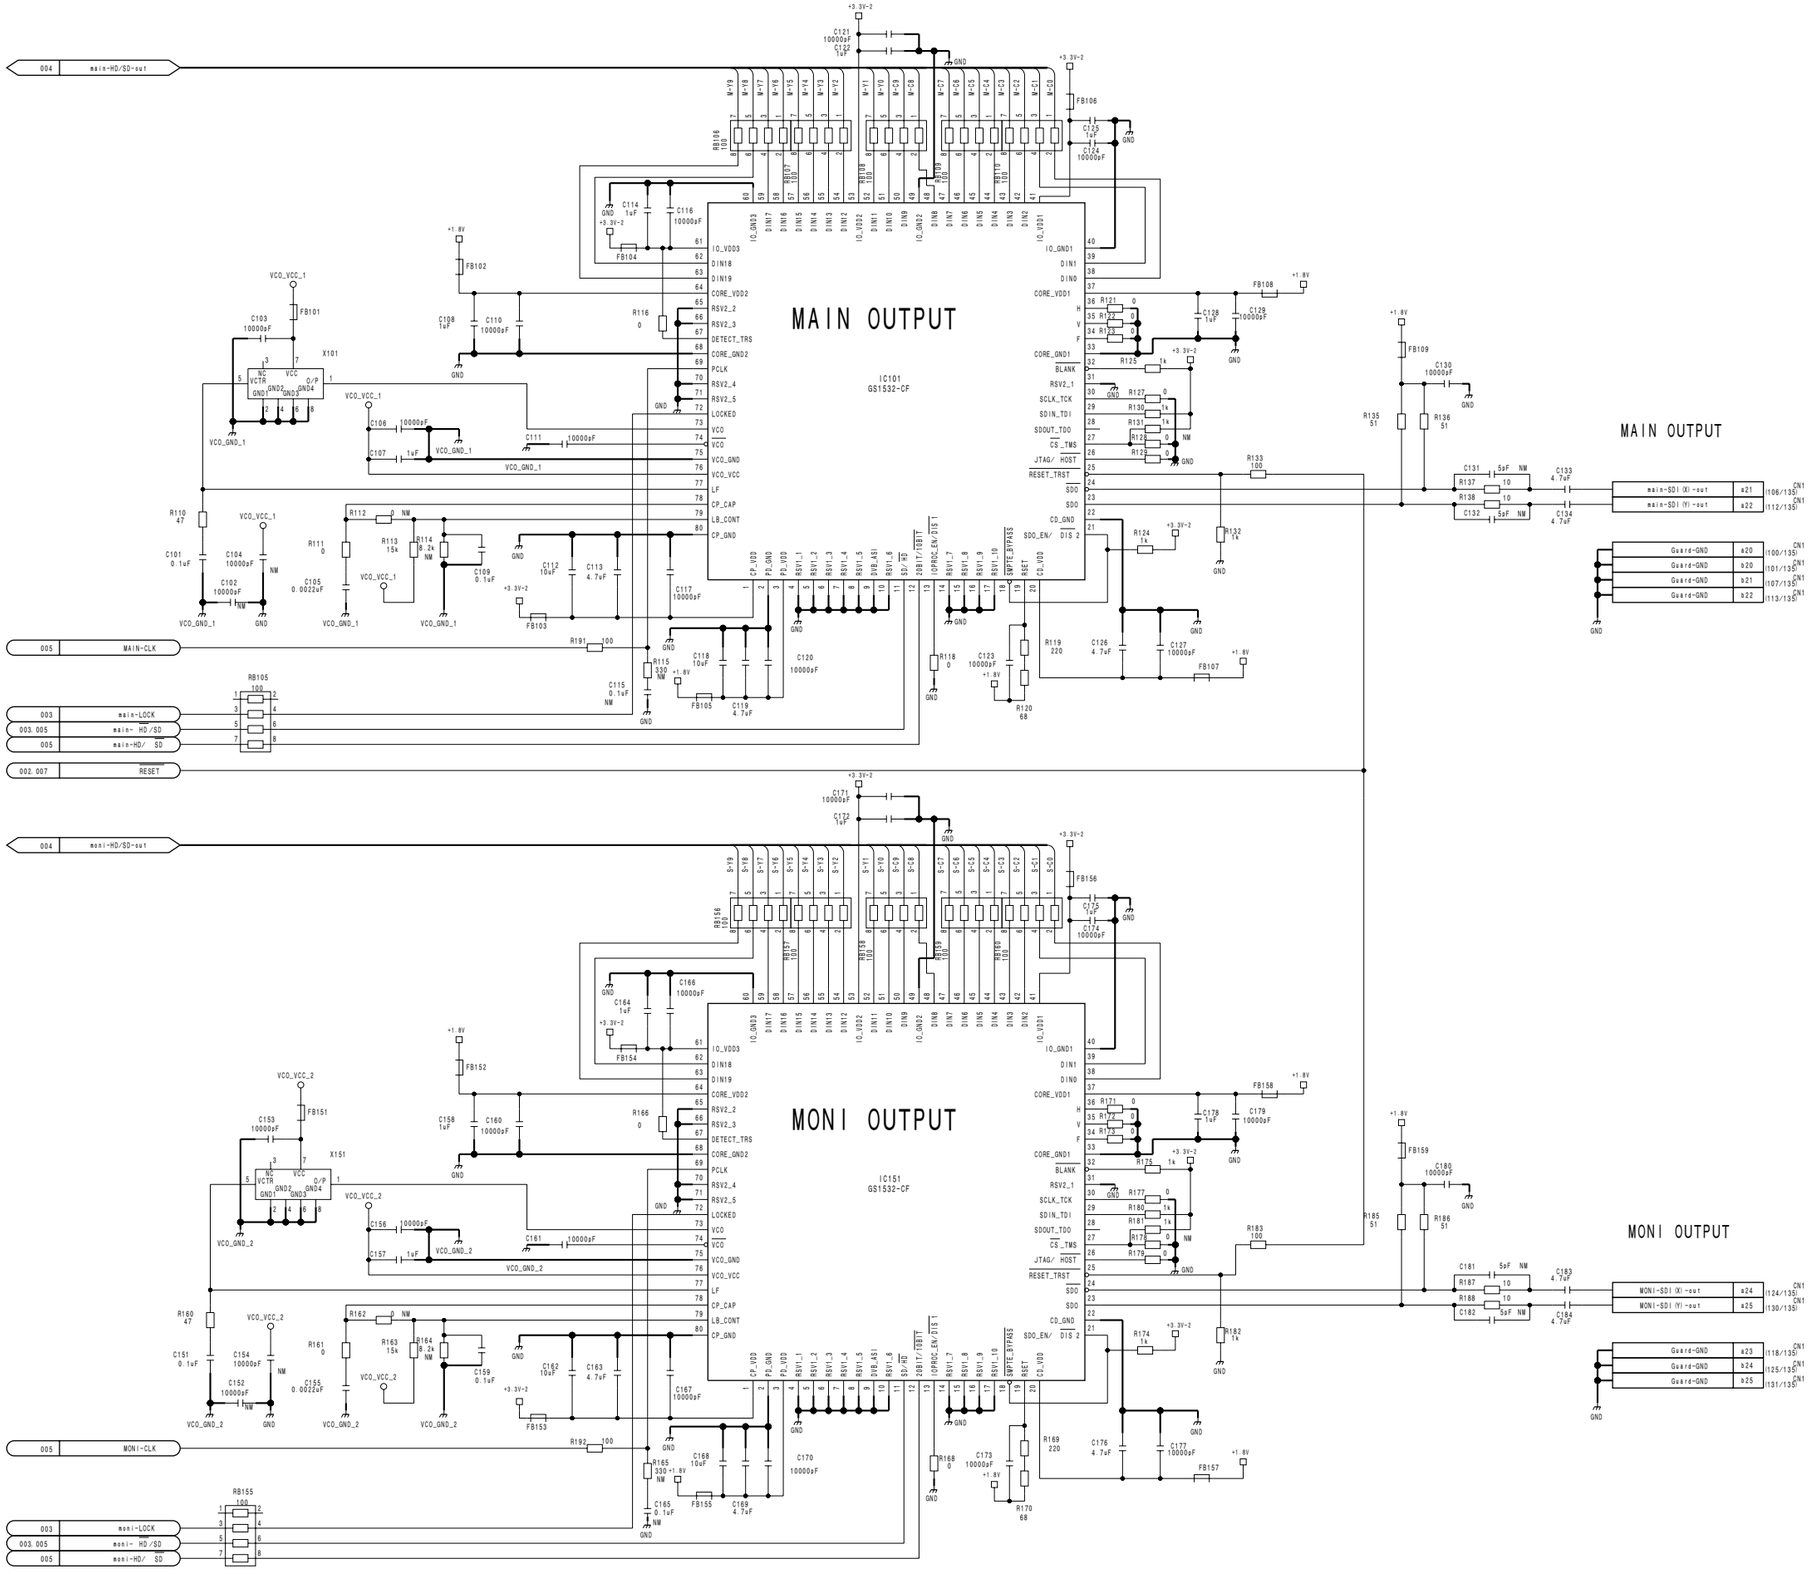


**DRX-5 (8/9)**
BOARD NO. 1-867-880-13
HDCU1000_DRX-5_012_8

**DRX-5 (9/9)**
**SUFFIX: -13**

# POST-PLD2 (NEXT)

# NEXT out

BANK1 : 2.5V
BANK2 : 2.5V
BANK3 : 3.3V
BANK4 : 3.3V

IC911 EP1C12F324C8N (300)

IC505 IC506 IC507 SN74LVC574APWR

CN1


7-74

**DRX-5 (9/9)**
BOARD NO. 1-867-880-13
HDCU1000_DRX-5_012_9

HDCU3300/MM (J,E)

DTX-5 (1/7)
SUFFIX: -11

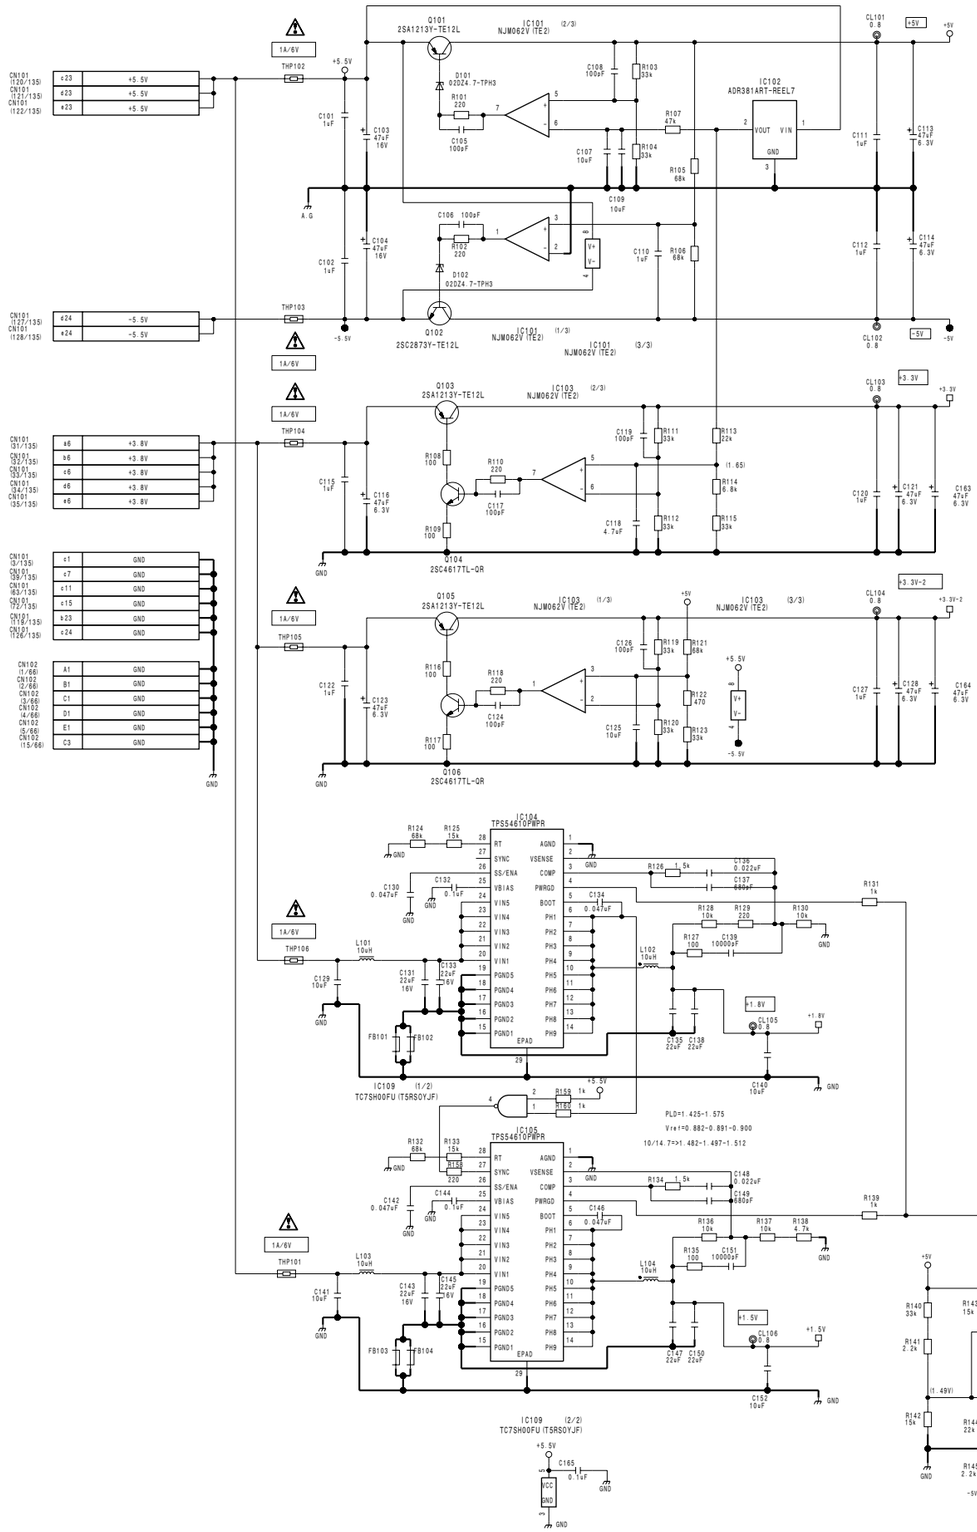





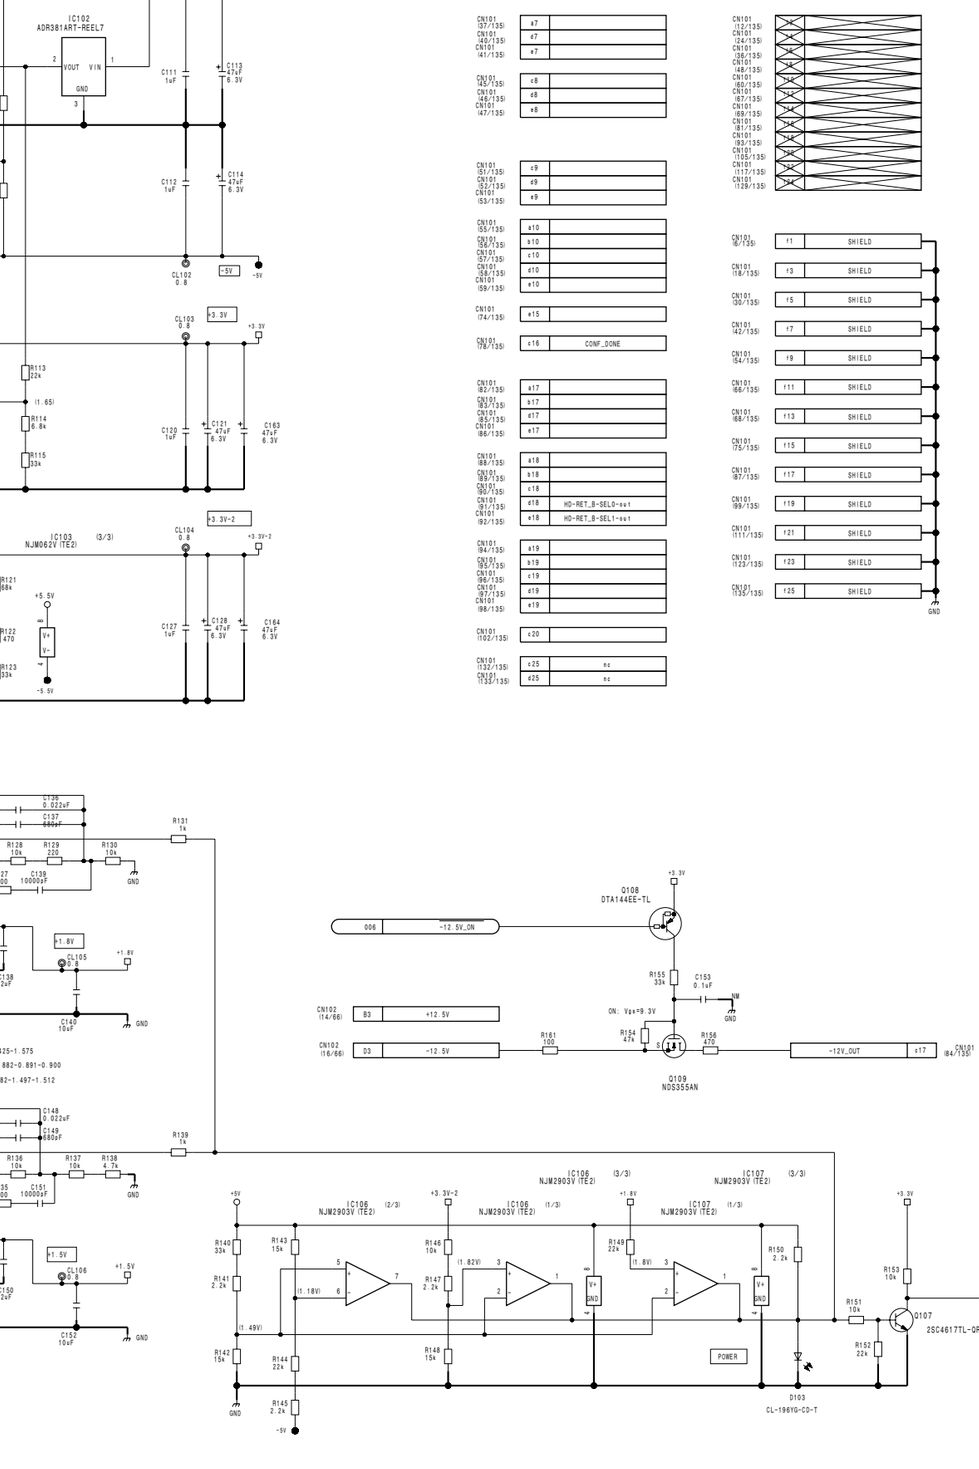




















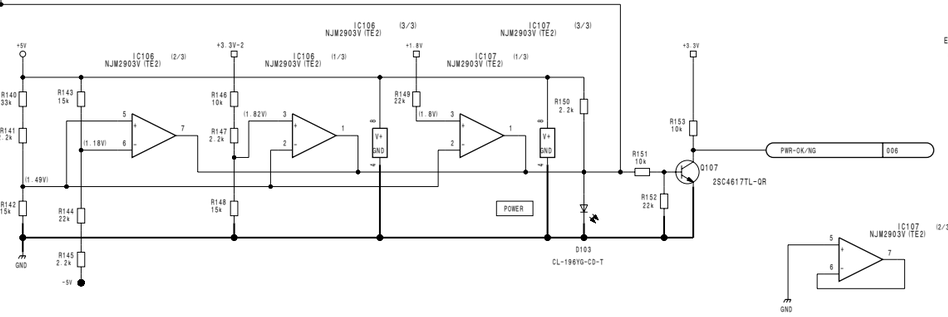


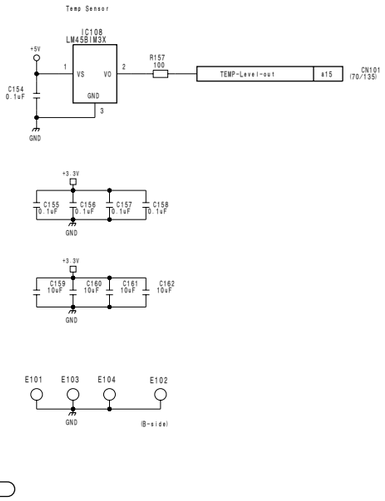




DTX-5 (1/7)
BOARD NO. 1-867-879-11
HDCU1000_DTX-5_011_1

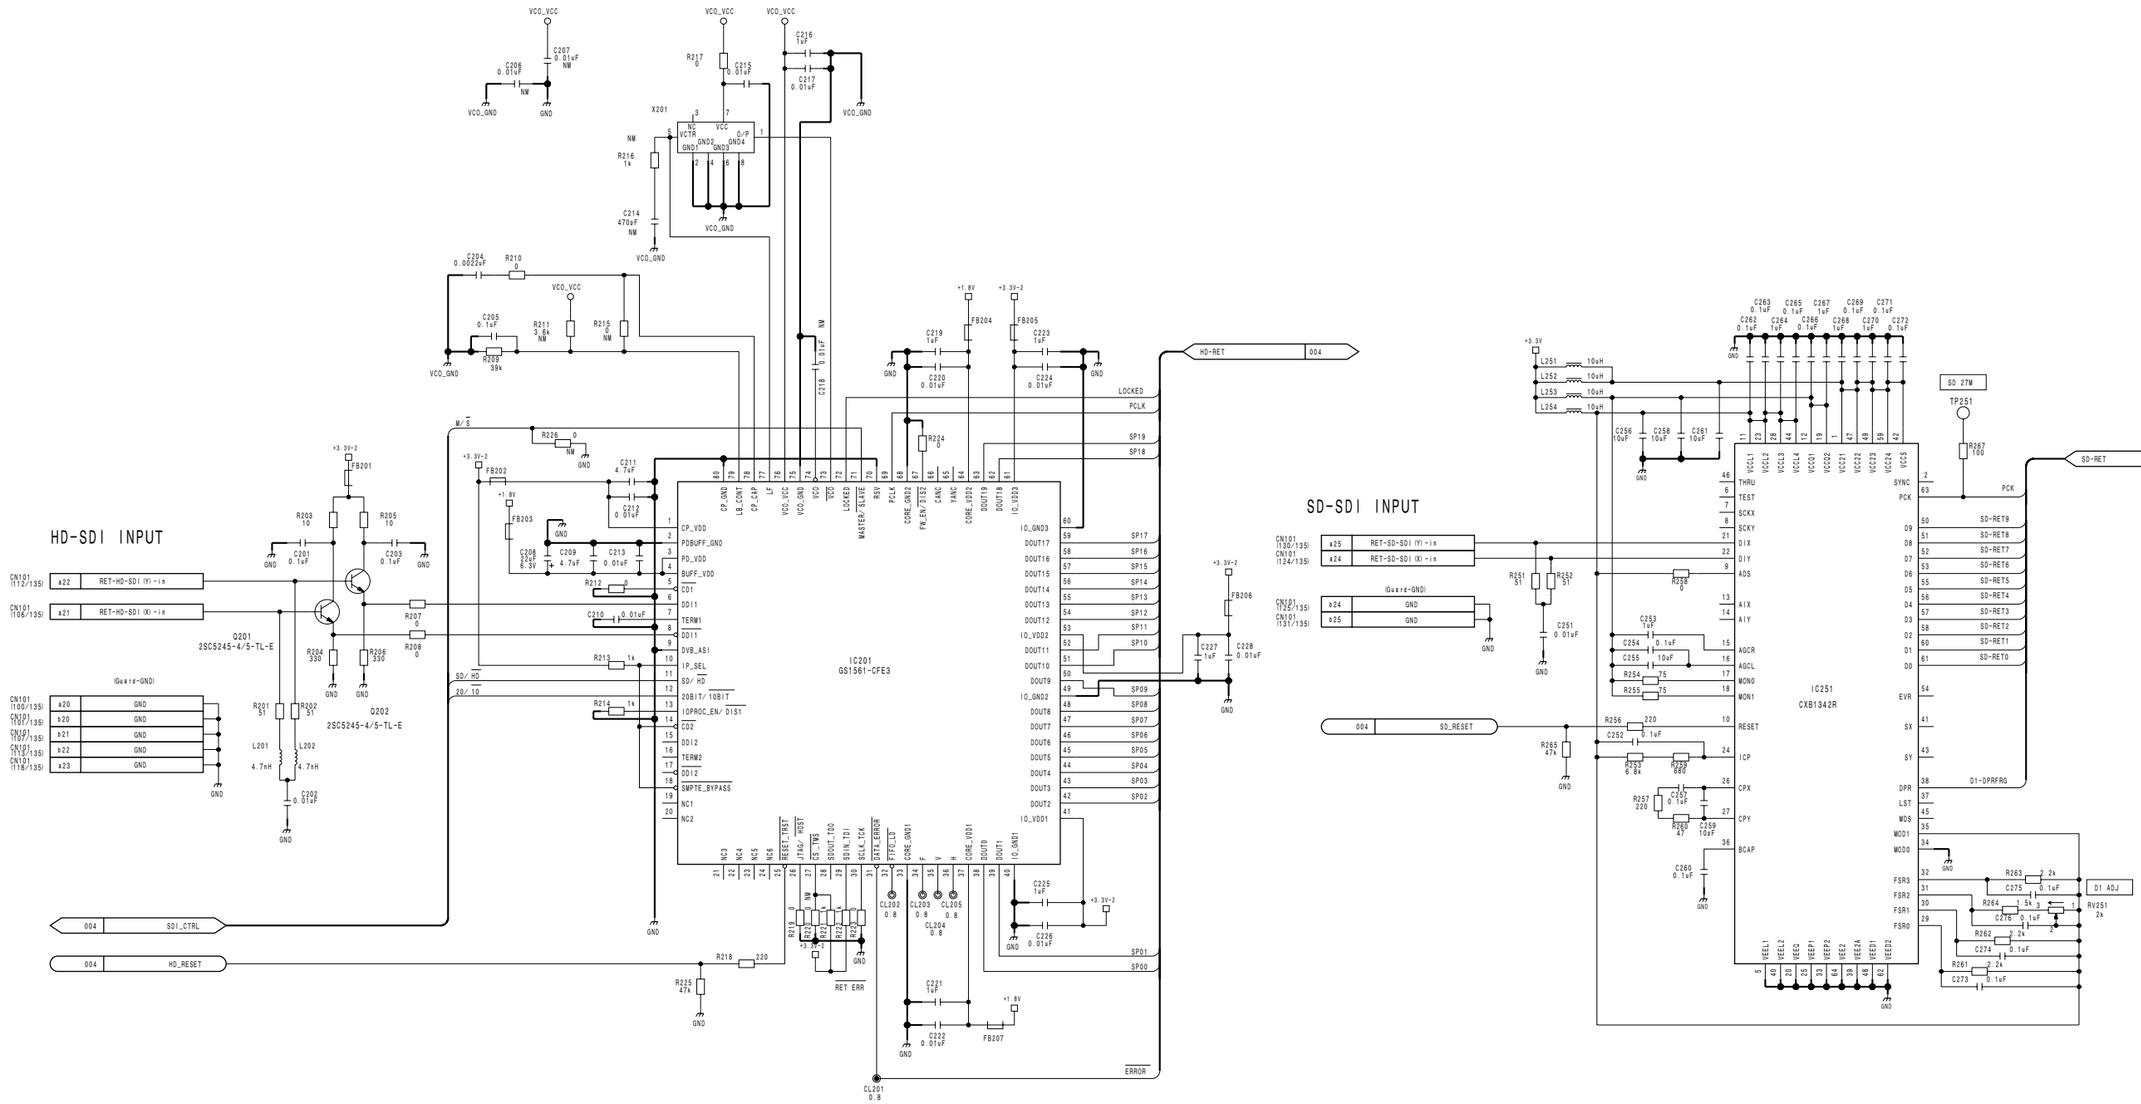




**DTX-5 (2/7)**
BOARD NO. 1-867-879-11
HDCU1000_DTX-5_011_2

HDCU3300/MM (J,E)

DTX-5 (3/7)
SUFFIX: -11

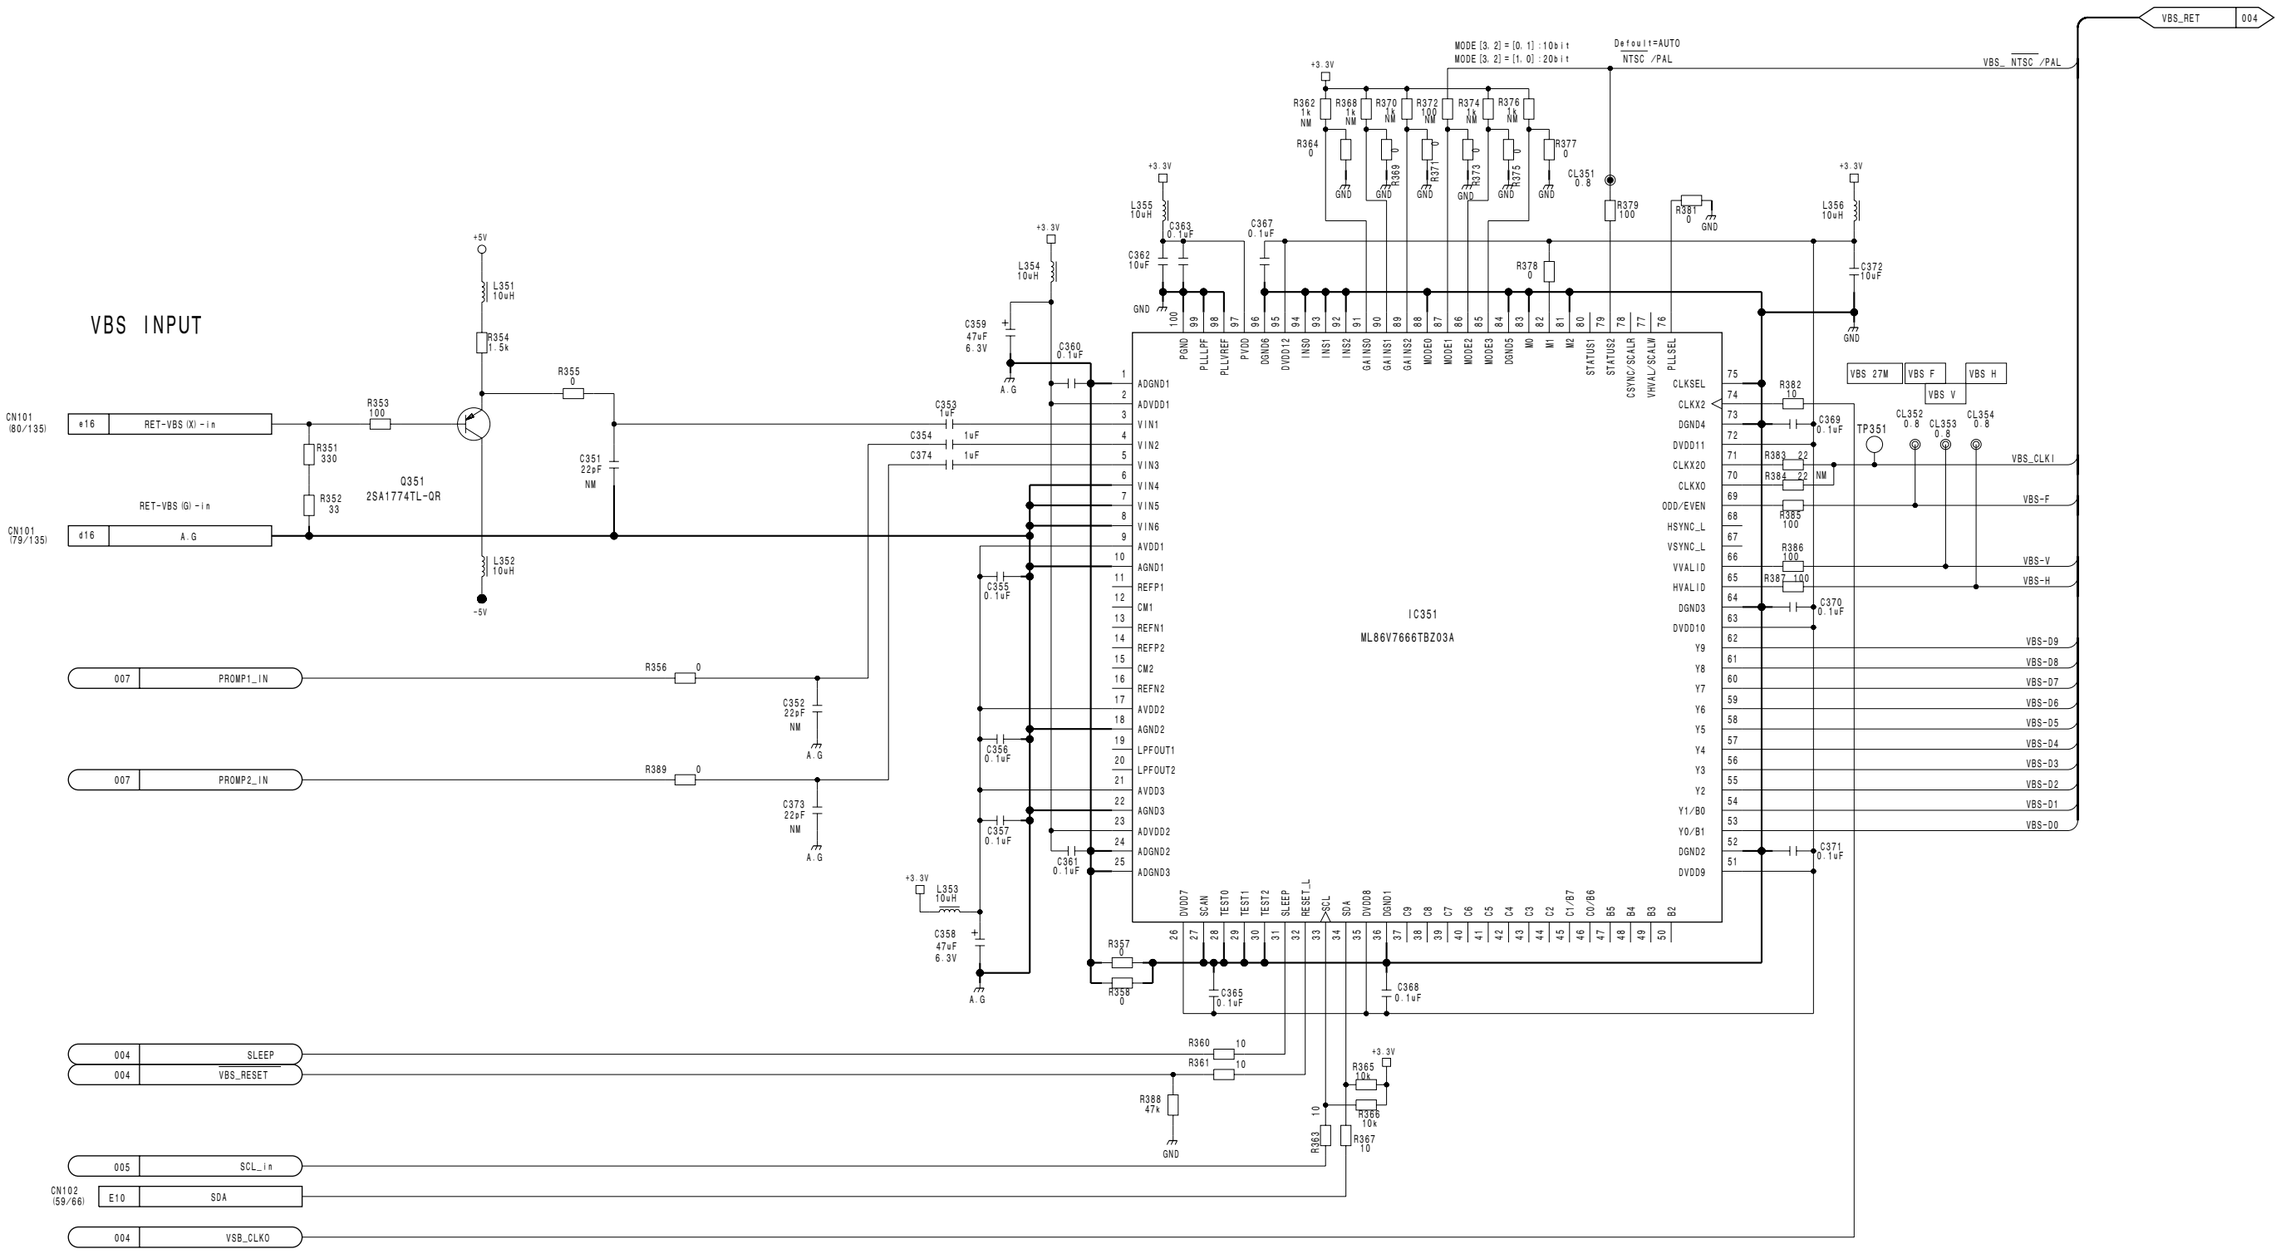


# DTX-5 (3/7)

BOARD NO. 1-867-879-11

HDCU1000_DTX-5_011_3

# DTX-5 (4/7)
**SUFFIX: -11**

DTX-5 (4/7)
SUFFIX: -11

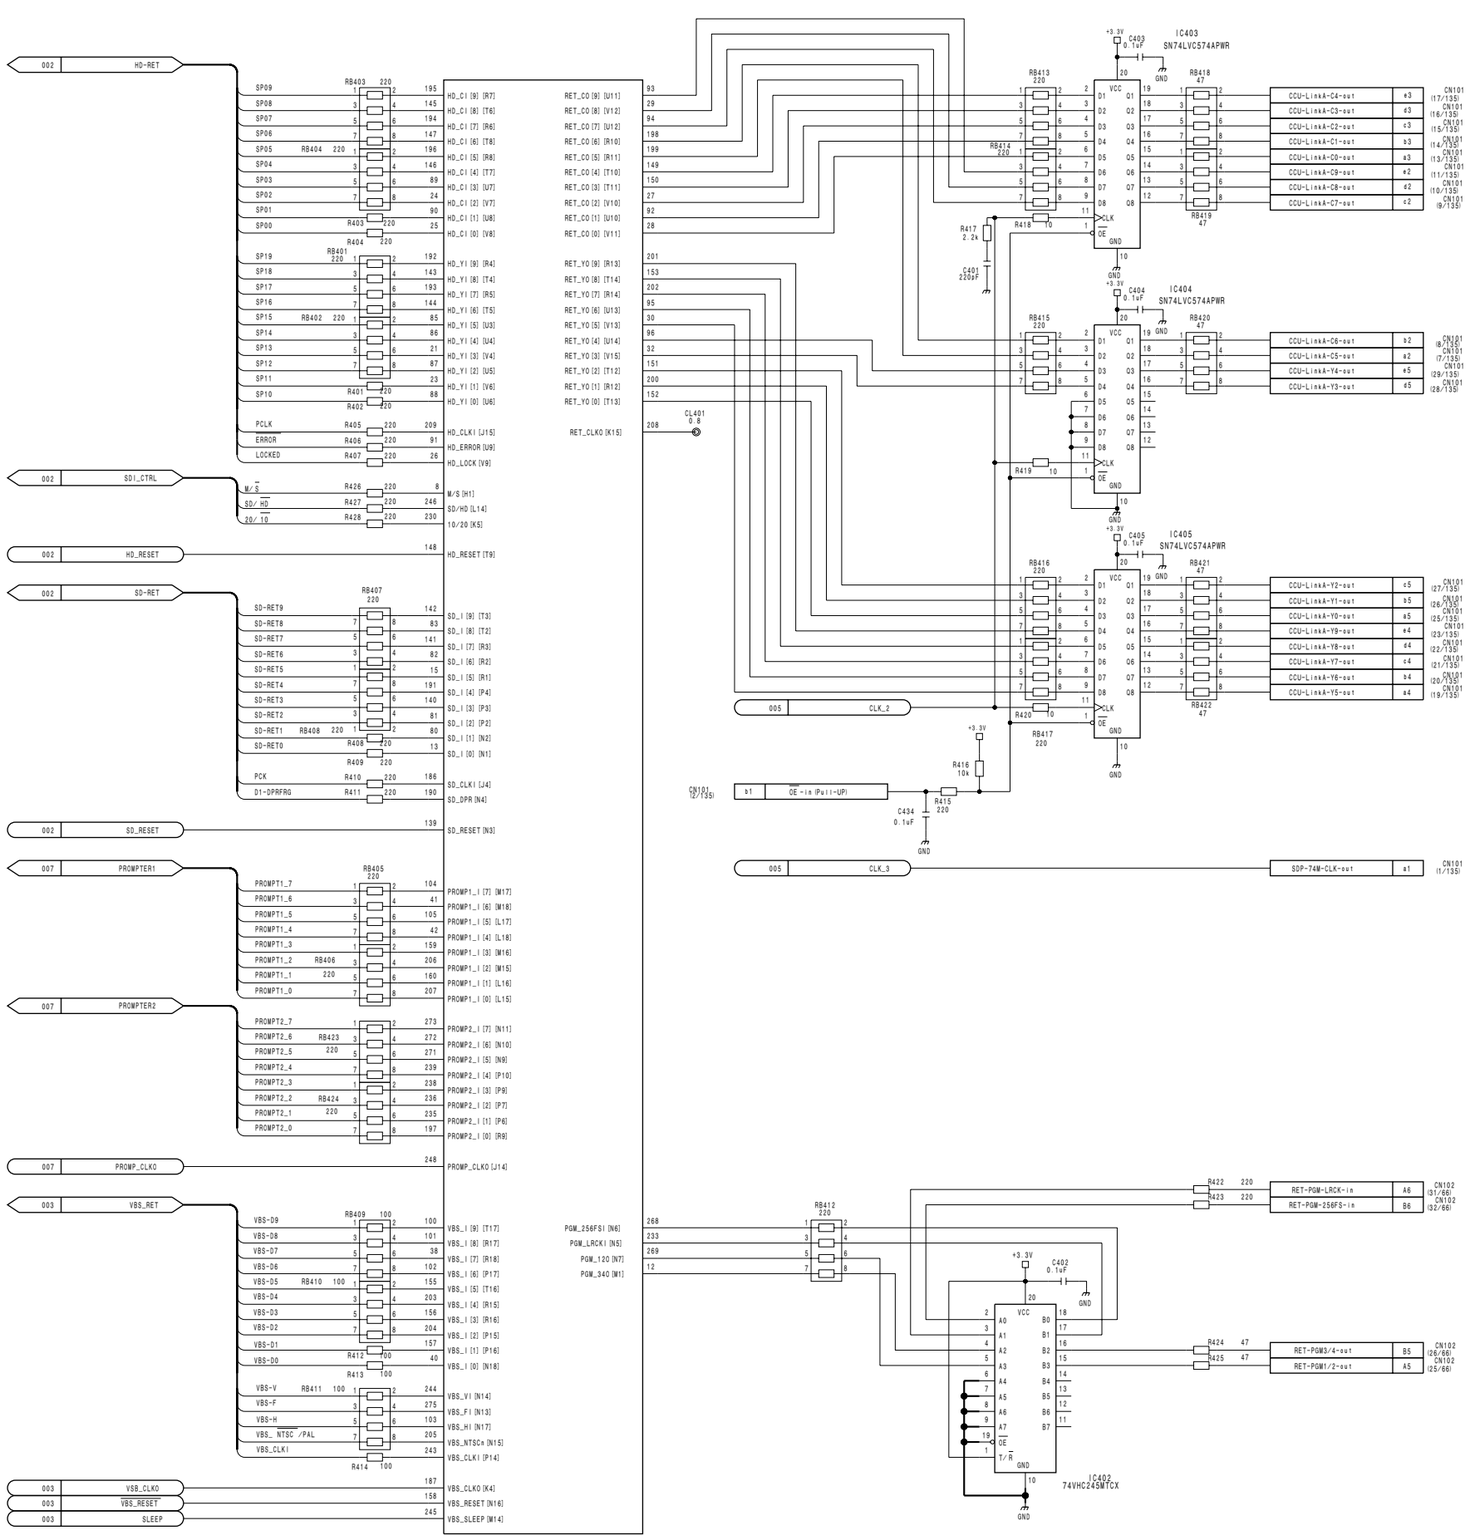


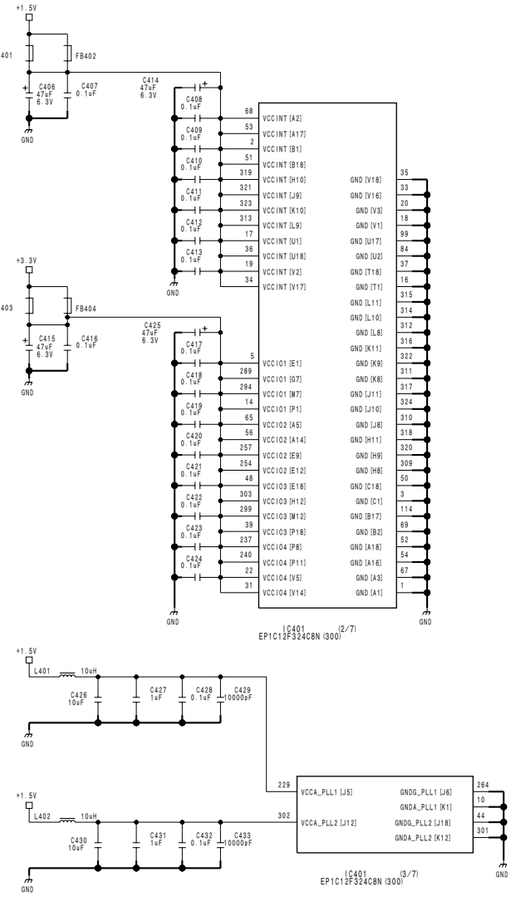








# DTX-5 (4/7)
BOARD NO. 1-867-879-11
HDCU1000_DTX-5_011_4



7-78

HDCU3300/MM (J,E)

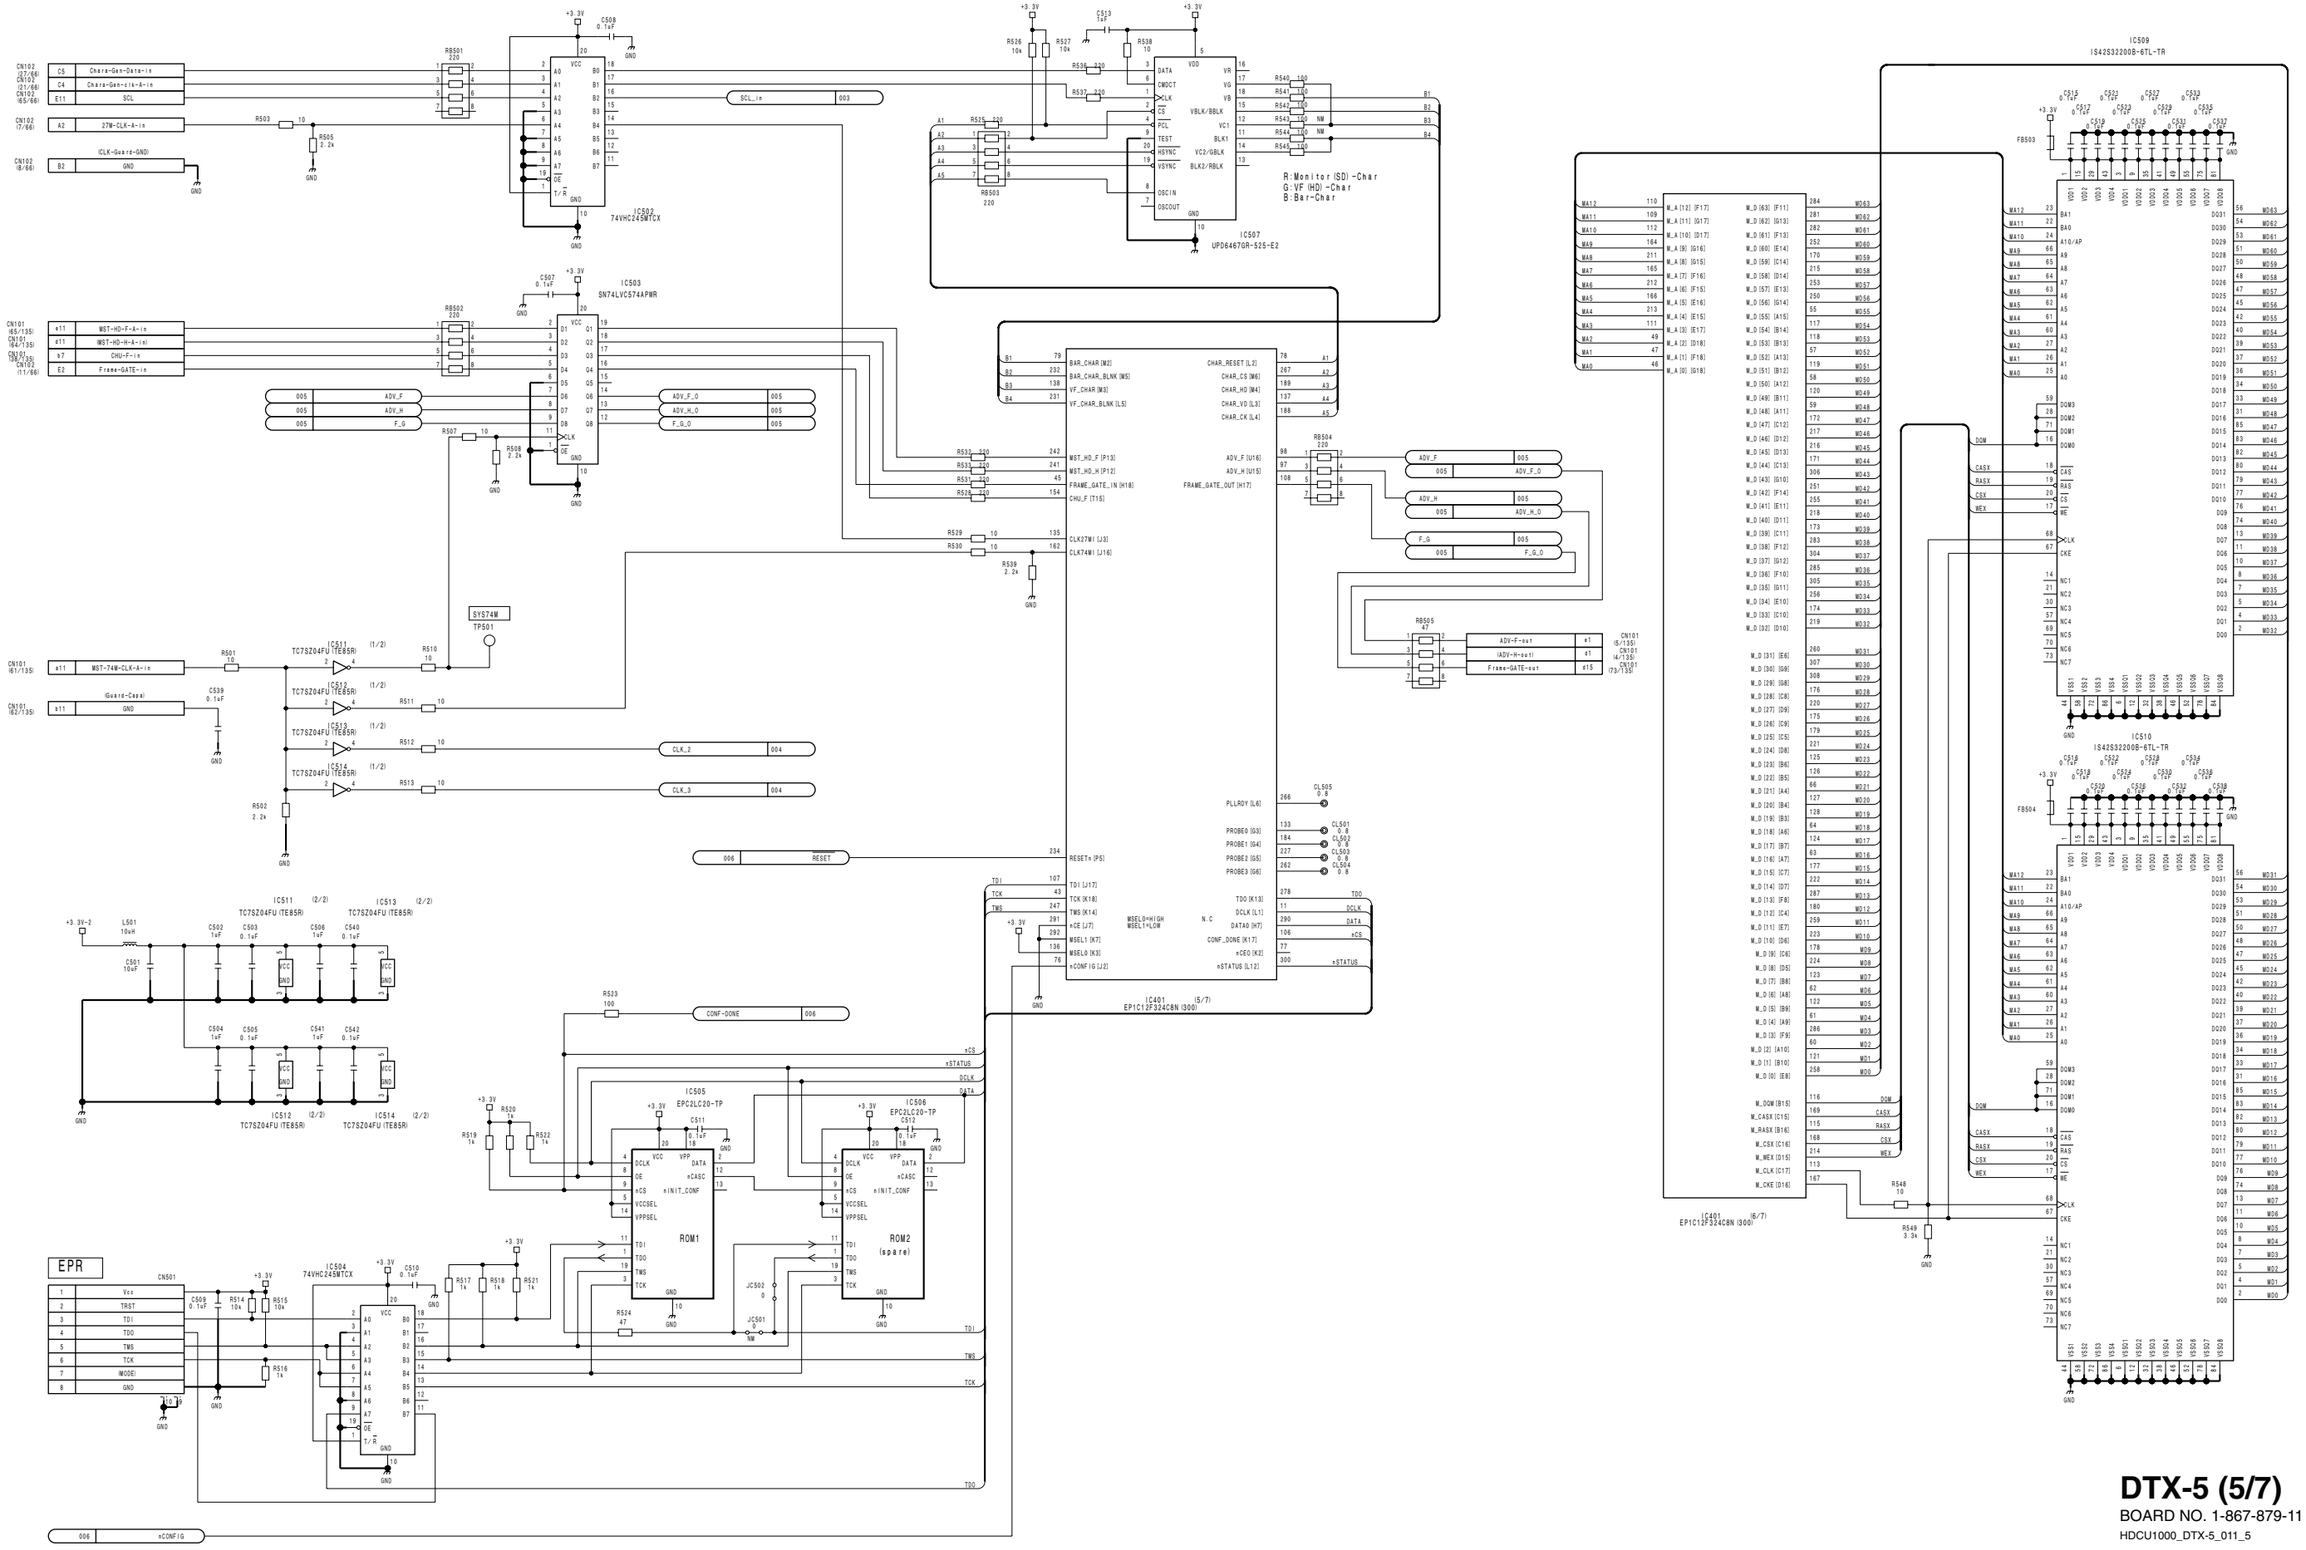


**DTX-5 (5/7)**
BOARD NO. 1-867-879-11
HDCU1000_DTX-5_011_5

DTX-5 (6/7)
SUFFIX: -11

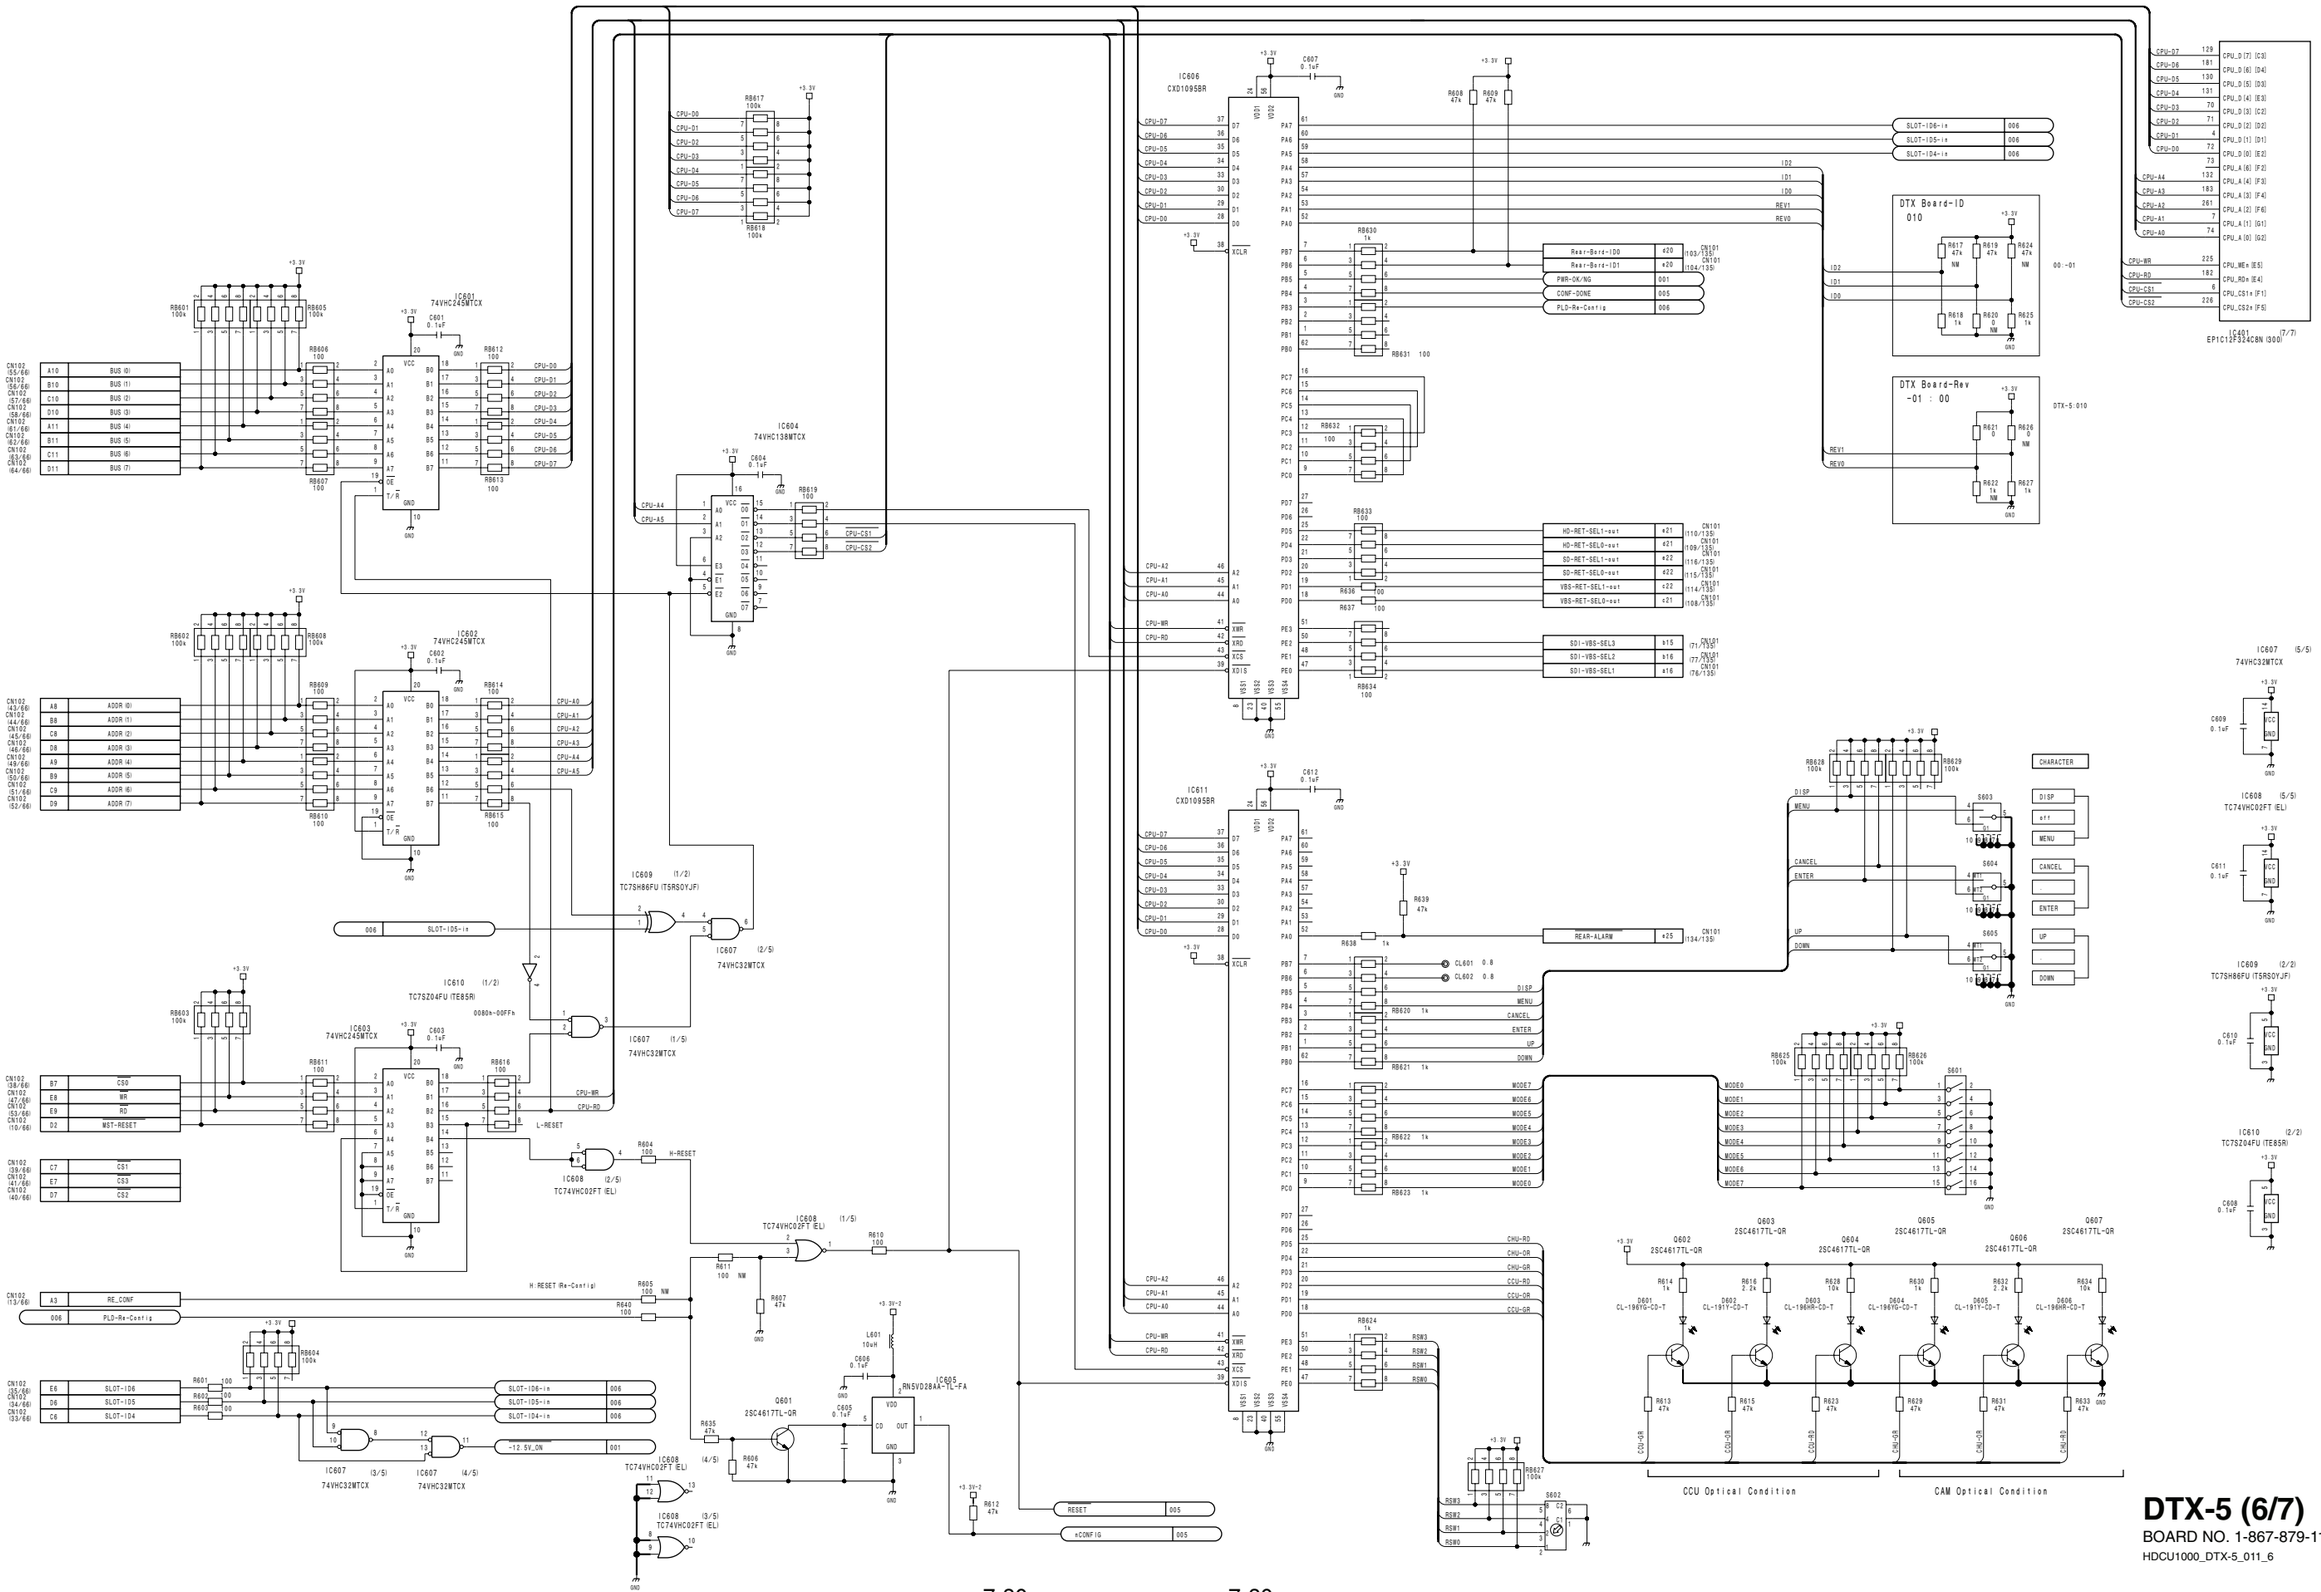




# DTX-5 (6/7)

BOARD NO. 1-867-879-11

HDCU1000_DTX-5_011_6

HDCU3300/MM (J,E)

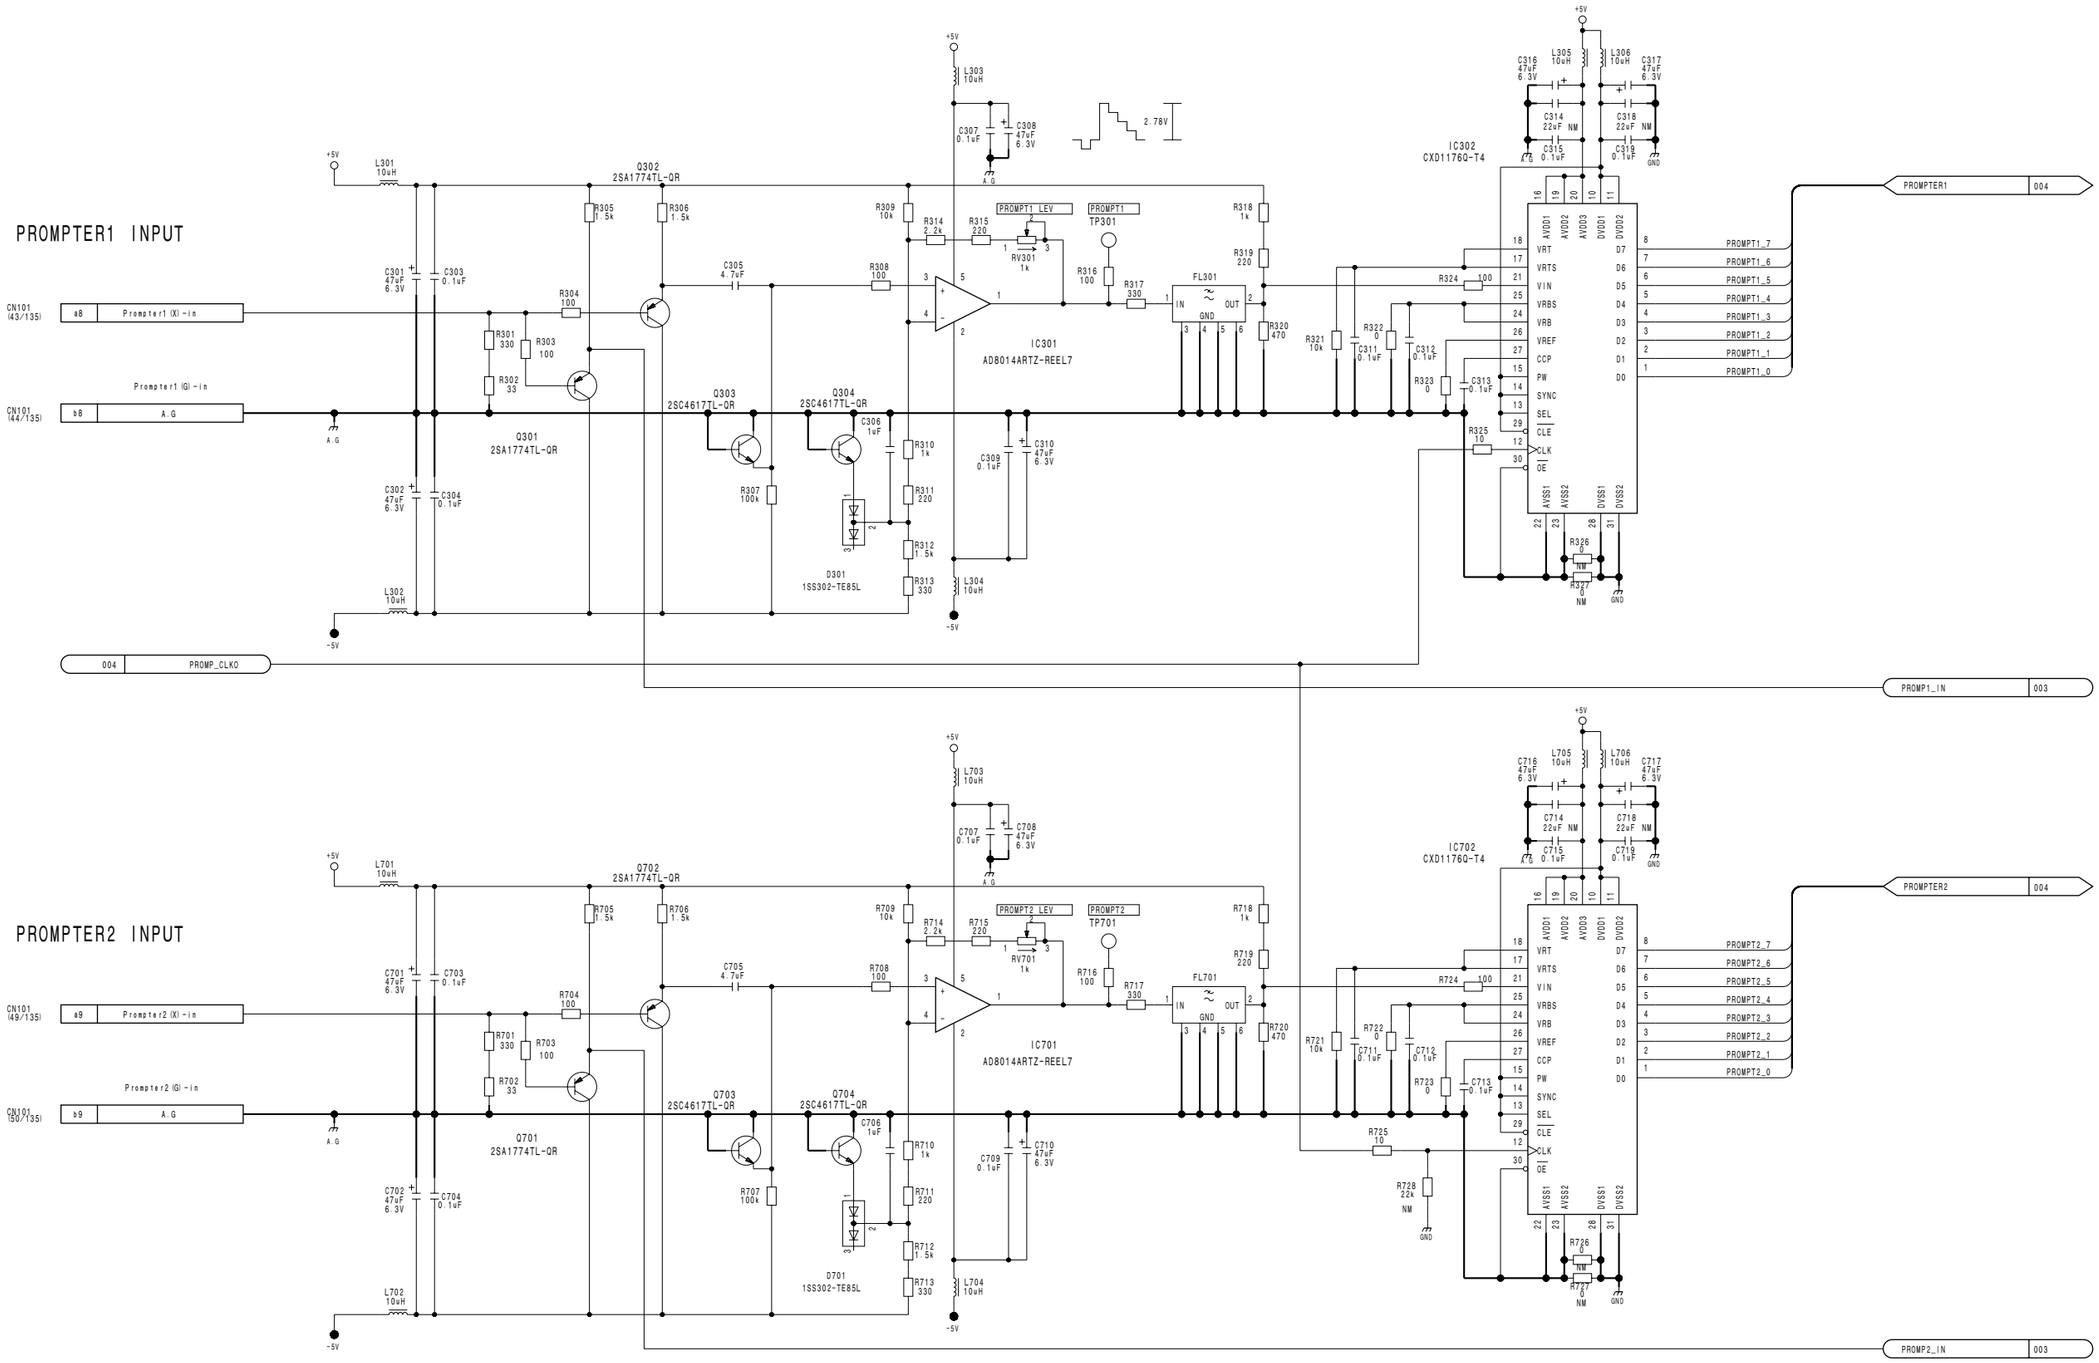
PROMPTER1 INPUT
PROMPTER2 INPUT
IC301
AD8014ARTZ-REEL7
IC302
CXD1176Q-T4
IC702
CXD1176Q-T4
Q301
2SA1774TL-QR
Q302
2SA1774TL-QR
Q303
2SC4617TL-QR
Q304
2SC4617TL-QR
Q701
2SA1774TL-QR
Q702
2SA1774TL-QR
Q703
2SC4617TL-QR
Q704
2SC4617TL-QR
D301
1SS302-TE85L
D701
1SS302-TE85L
TP301
TP701
RV301
1k
RV701
1k
PROMPT1_LEV
PROMPT2_LEV
FL301
FL701
2.78V
PROMPTER1
PROMPTER2
PROMPT1_IN
PROMPT2_IN
PROMPT1_0
PROMPT1_1
PROMPT1_2
PROMPT1_3
PROMPT1_4
PROMPT1_5
PROMPT1_6
PROMPT1_7
PROMPT2_0
PROMPT2_1
PROMPT2_2
PROMPT2_3
PROMPT2_4
PROMPT2_5
PROMPT2_6
PROMPT2_7
PROMP_CLKO
Prompter1 (X) -in
Prompter1 (G) -in
Prompter2 (X) -in
Prompter2 (G) -in
A.G
GND
+5V
-5V

# EN-159A (1/4)
SUFFIX: -11

EN-159A (1/4)
SUFFIX: -11

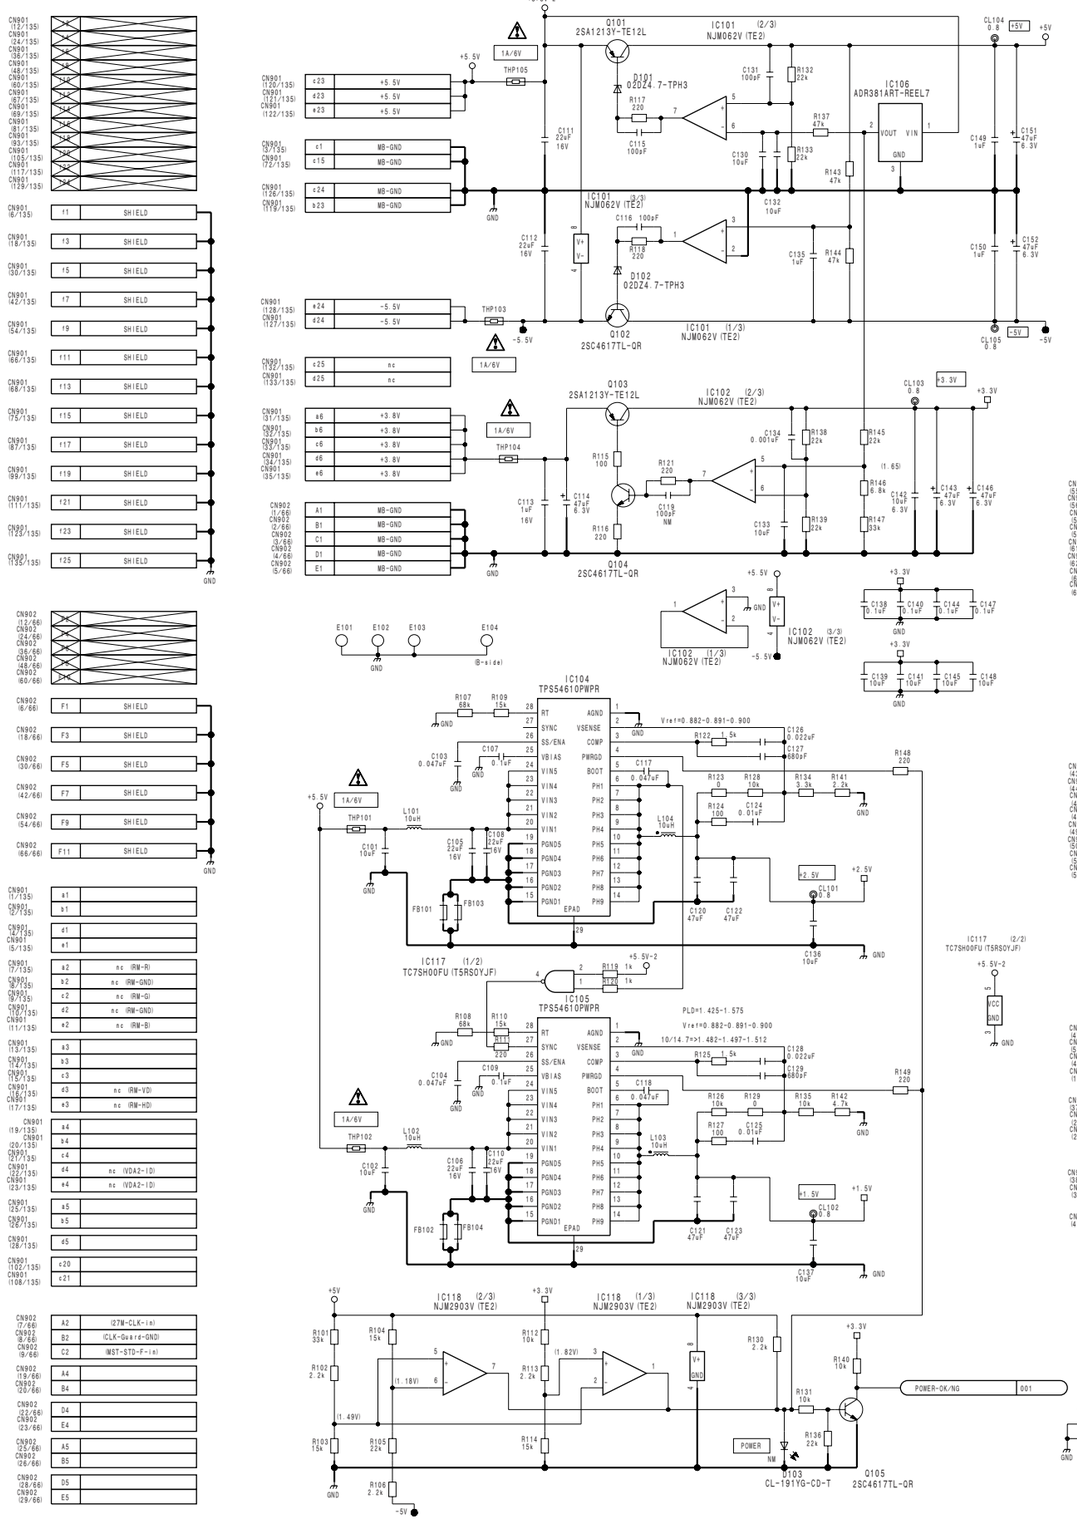


EN-159A (1/4)
BOARD NO. 1-868-002-11
HKCU1001_EN-159A_011_1

EN-159A (2/4)
SUFFIX: -11

**EN-159A (2/4)**
**SUFFIX: -11**

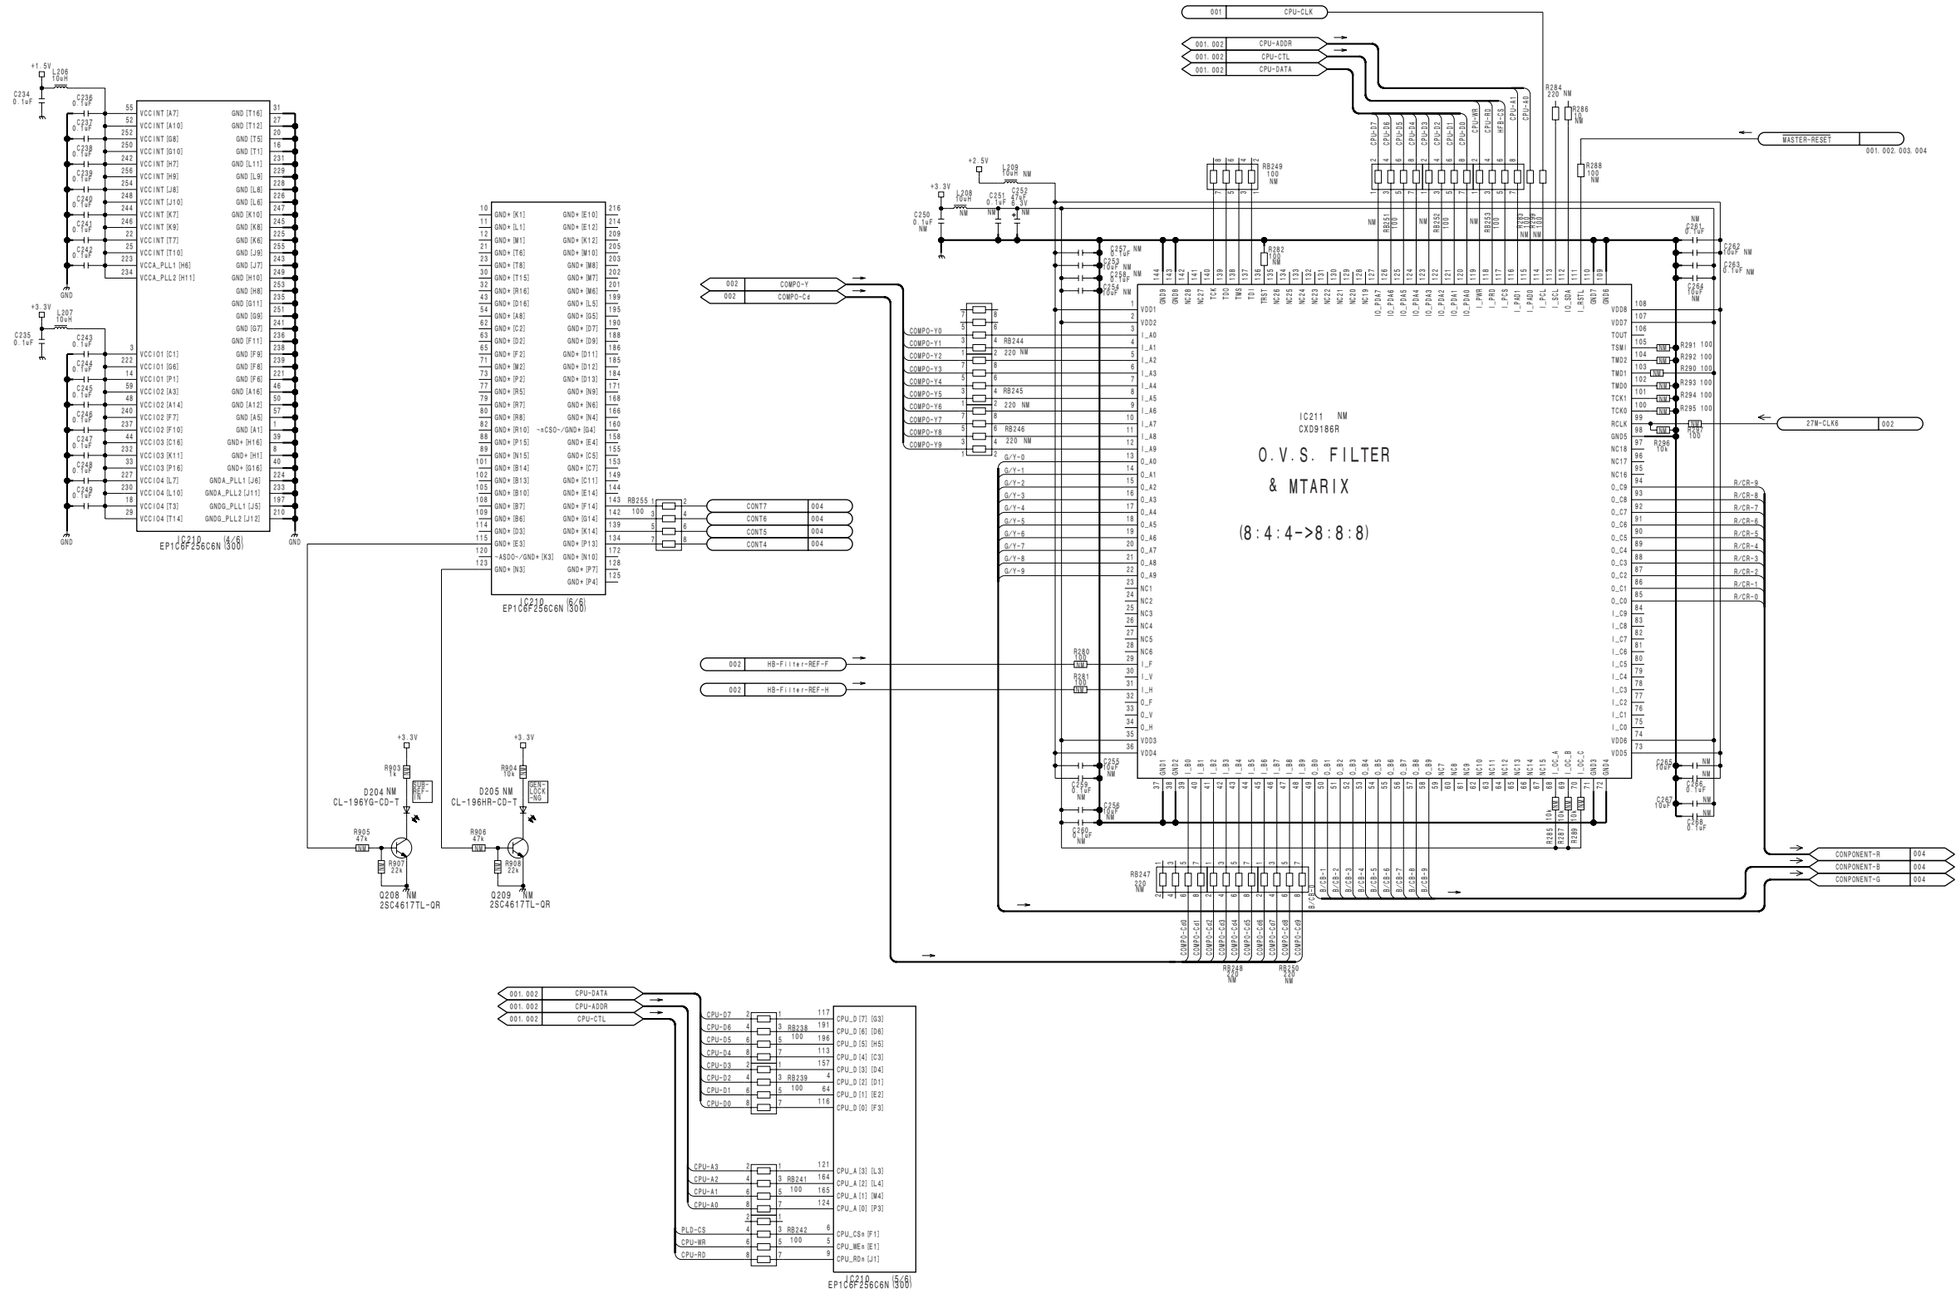

# EN-159A (3/4)
**SUFFIX: -11**

EN-159A (3/4)
SUFFIX: -11






7-86

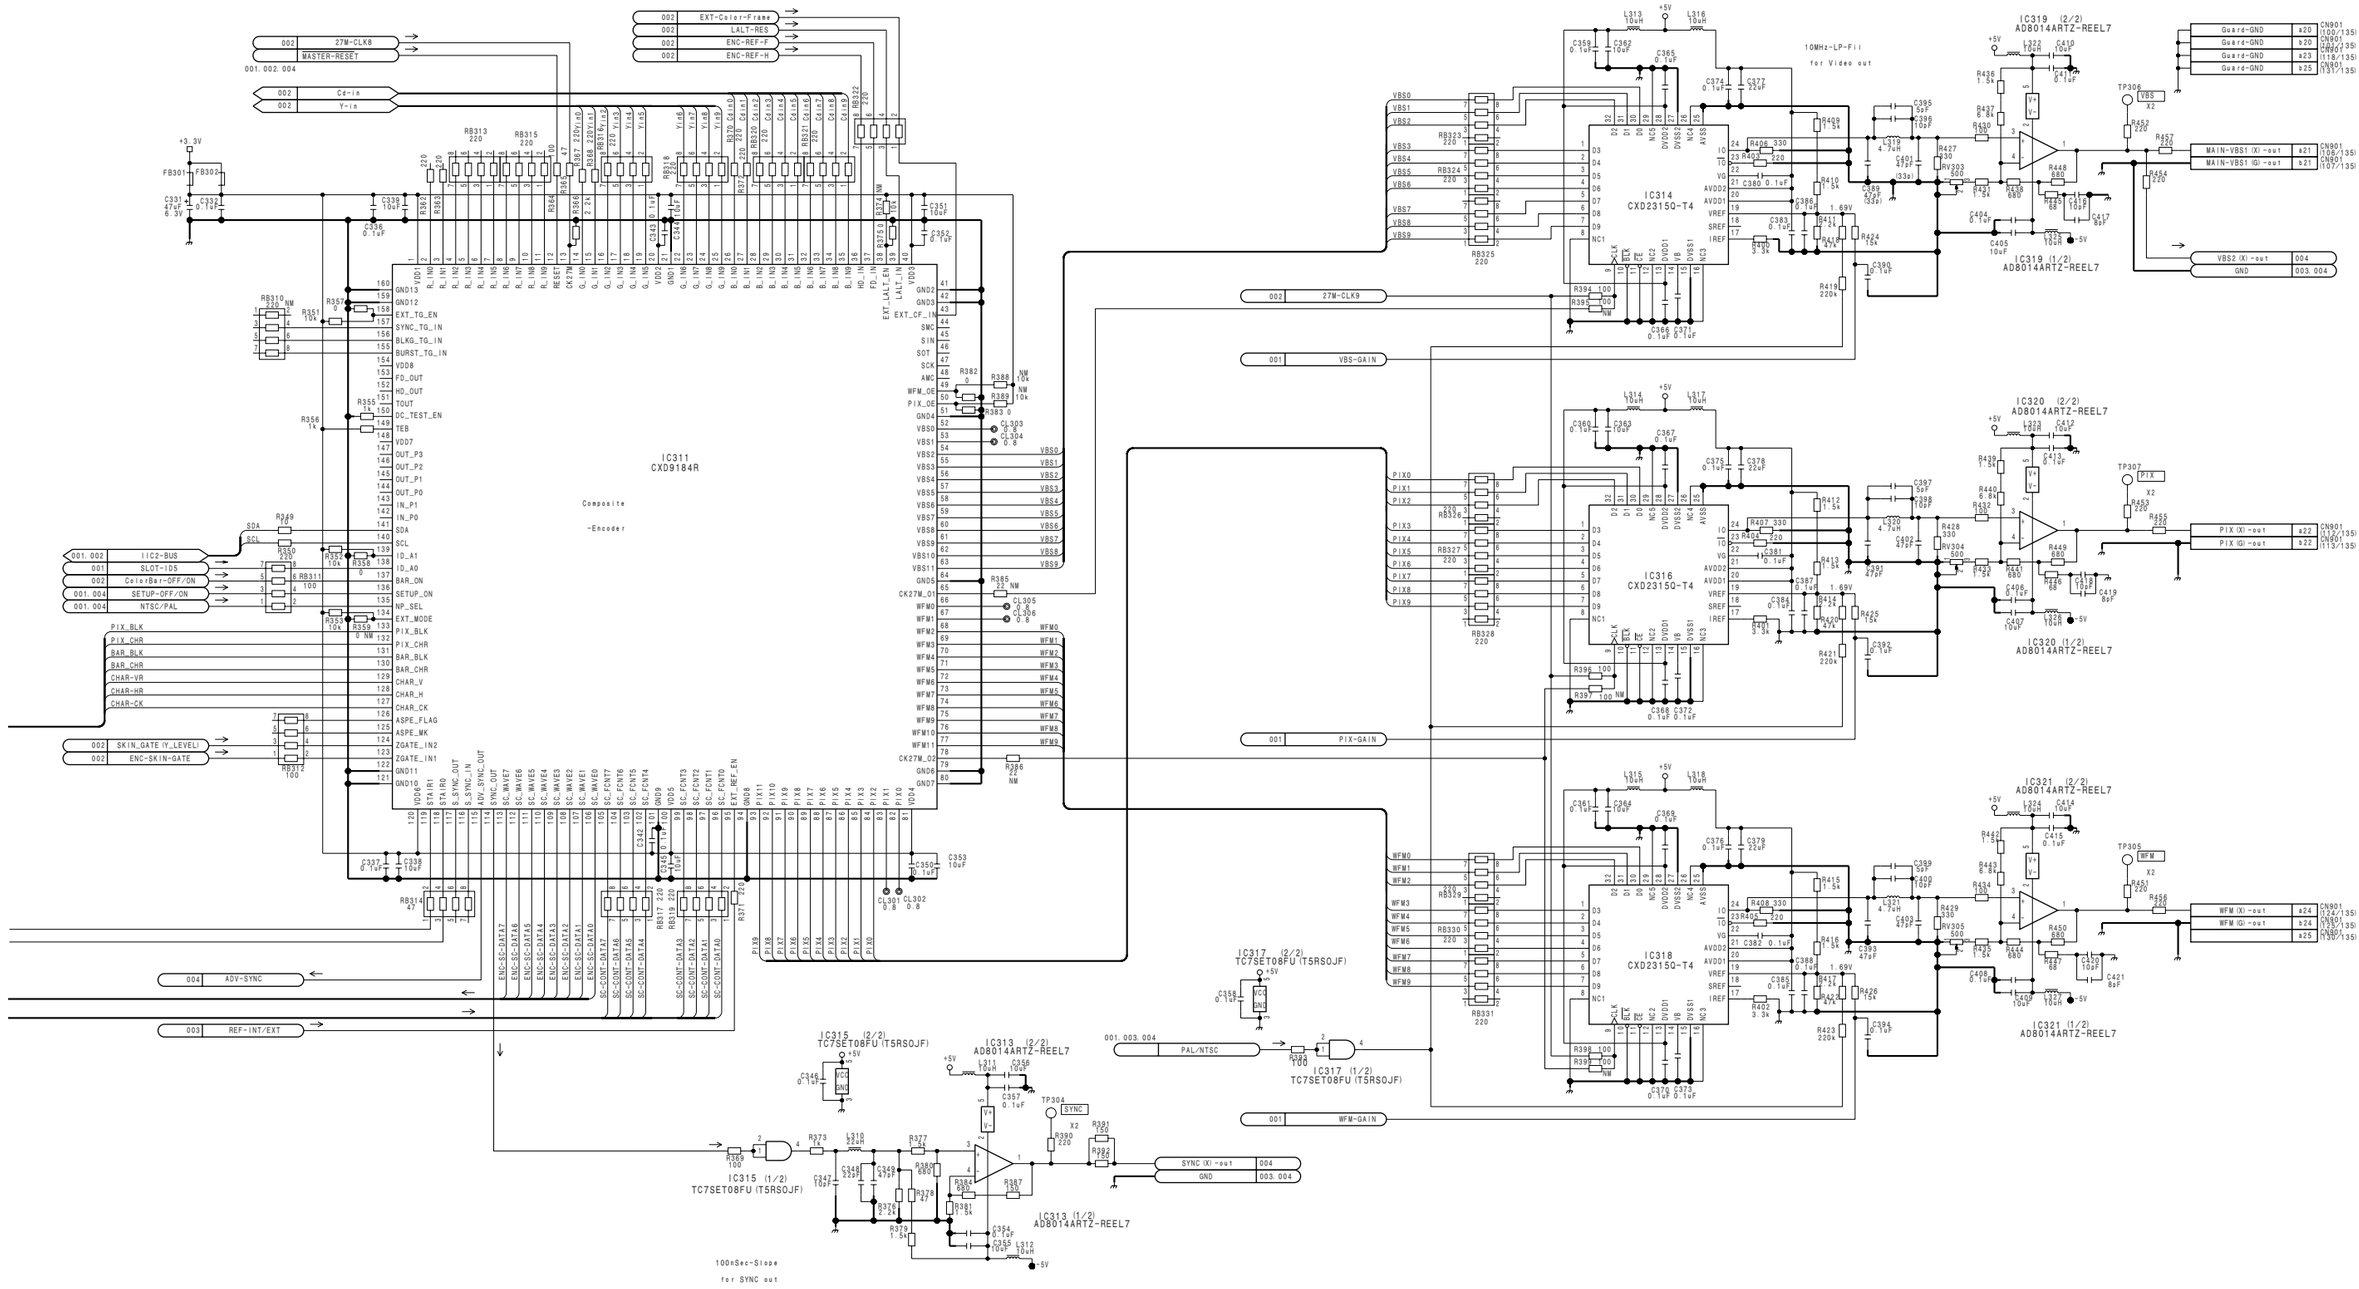


**EN-159A (3/4)**
BOARD NO. 1-868-002-11
HKCU1001_EN-159A_011_3

EN-159A (4/4)
SUFFIX: -11


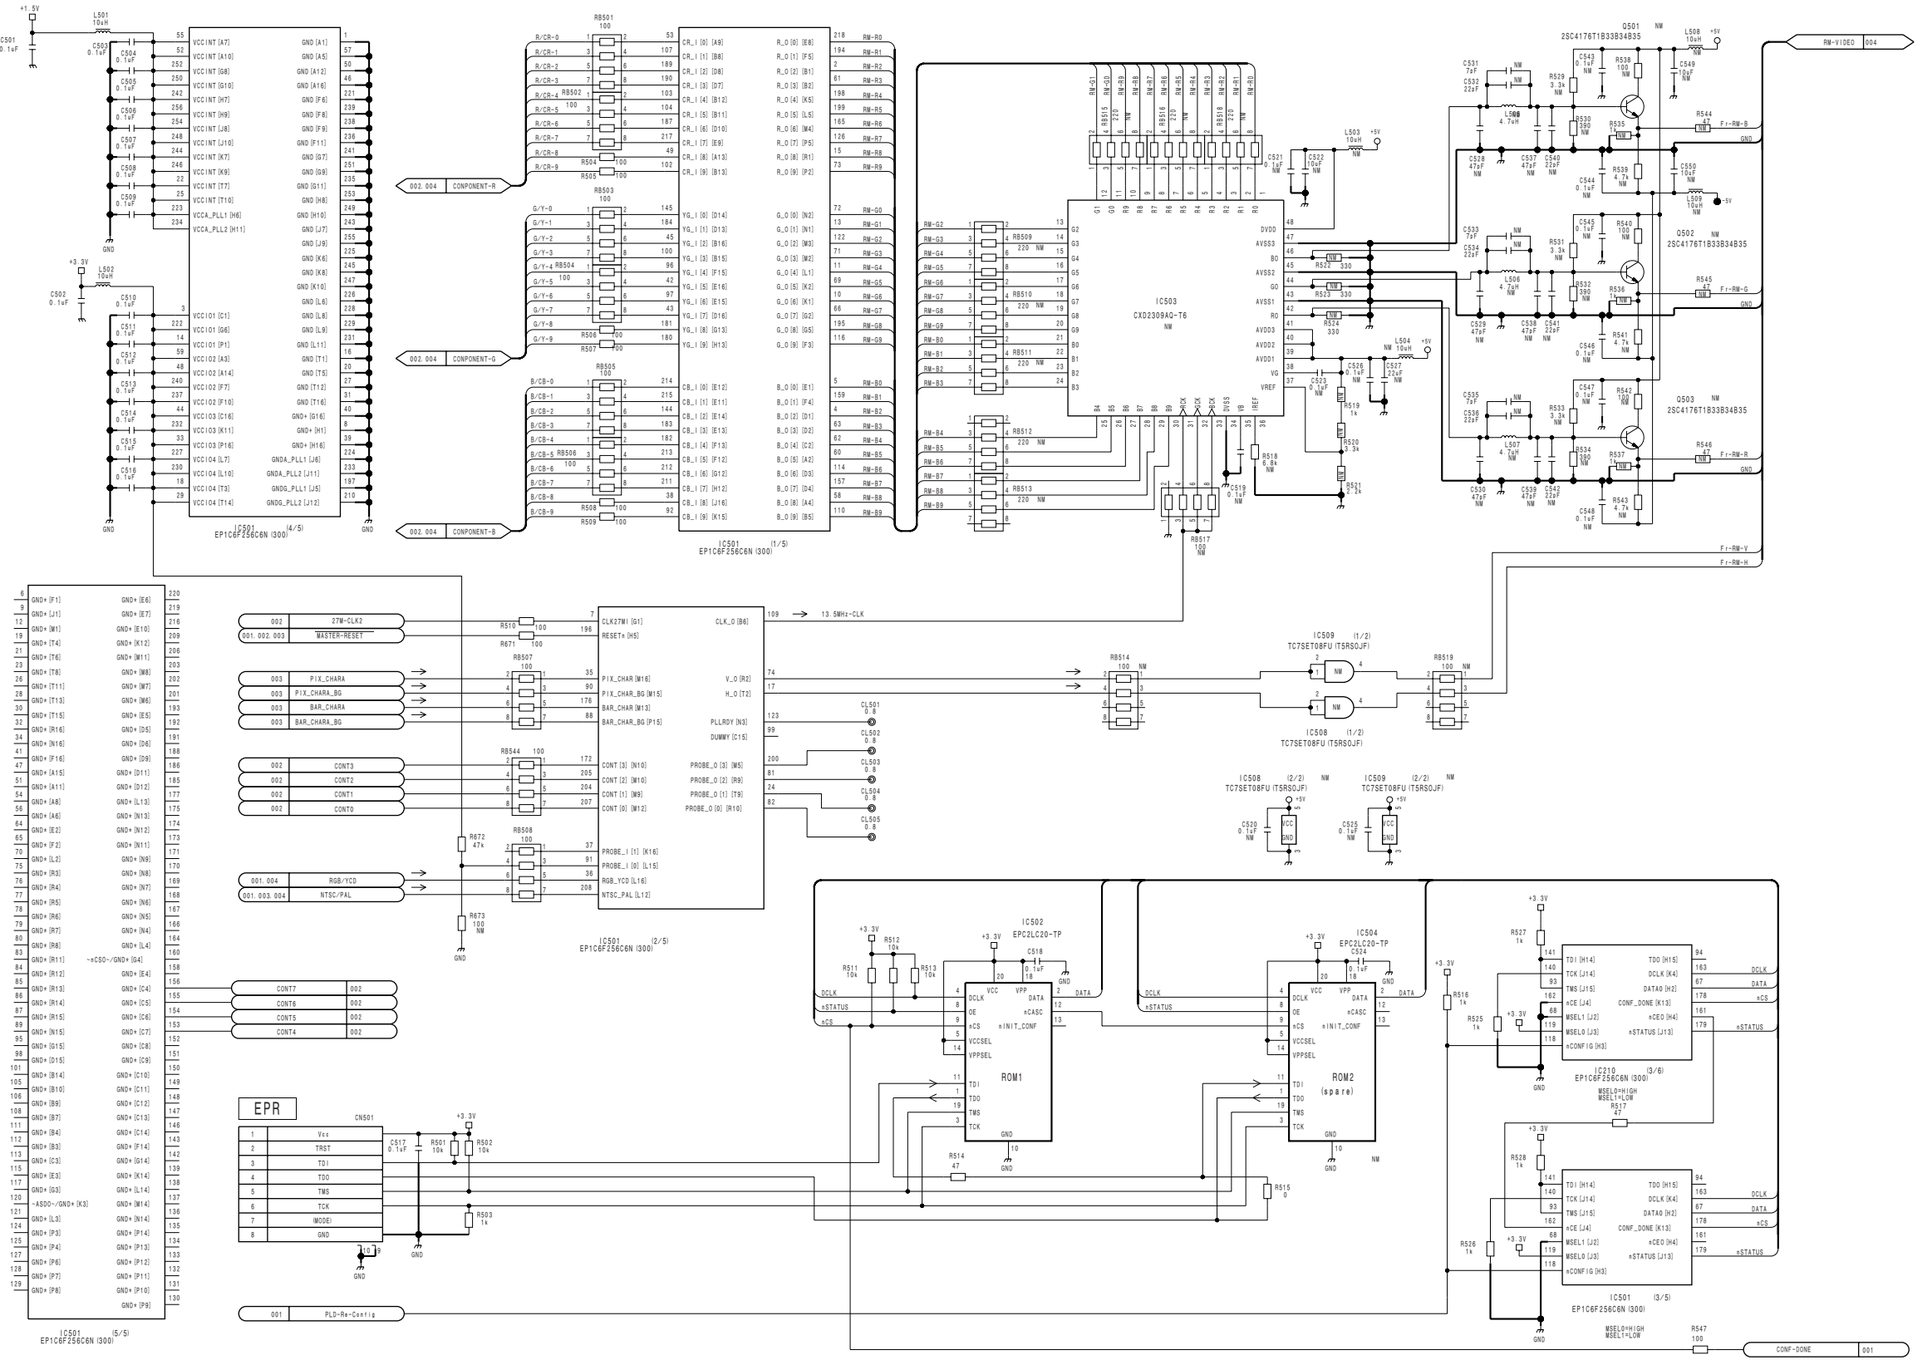

# EN-159A (4/4)
SUFFIX: -11

EN-159A (4/4)
SUFFIX: -11

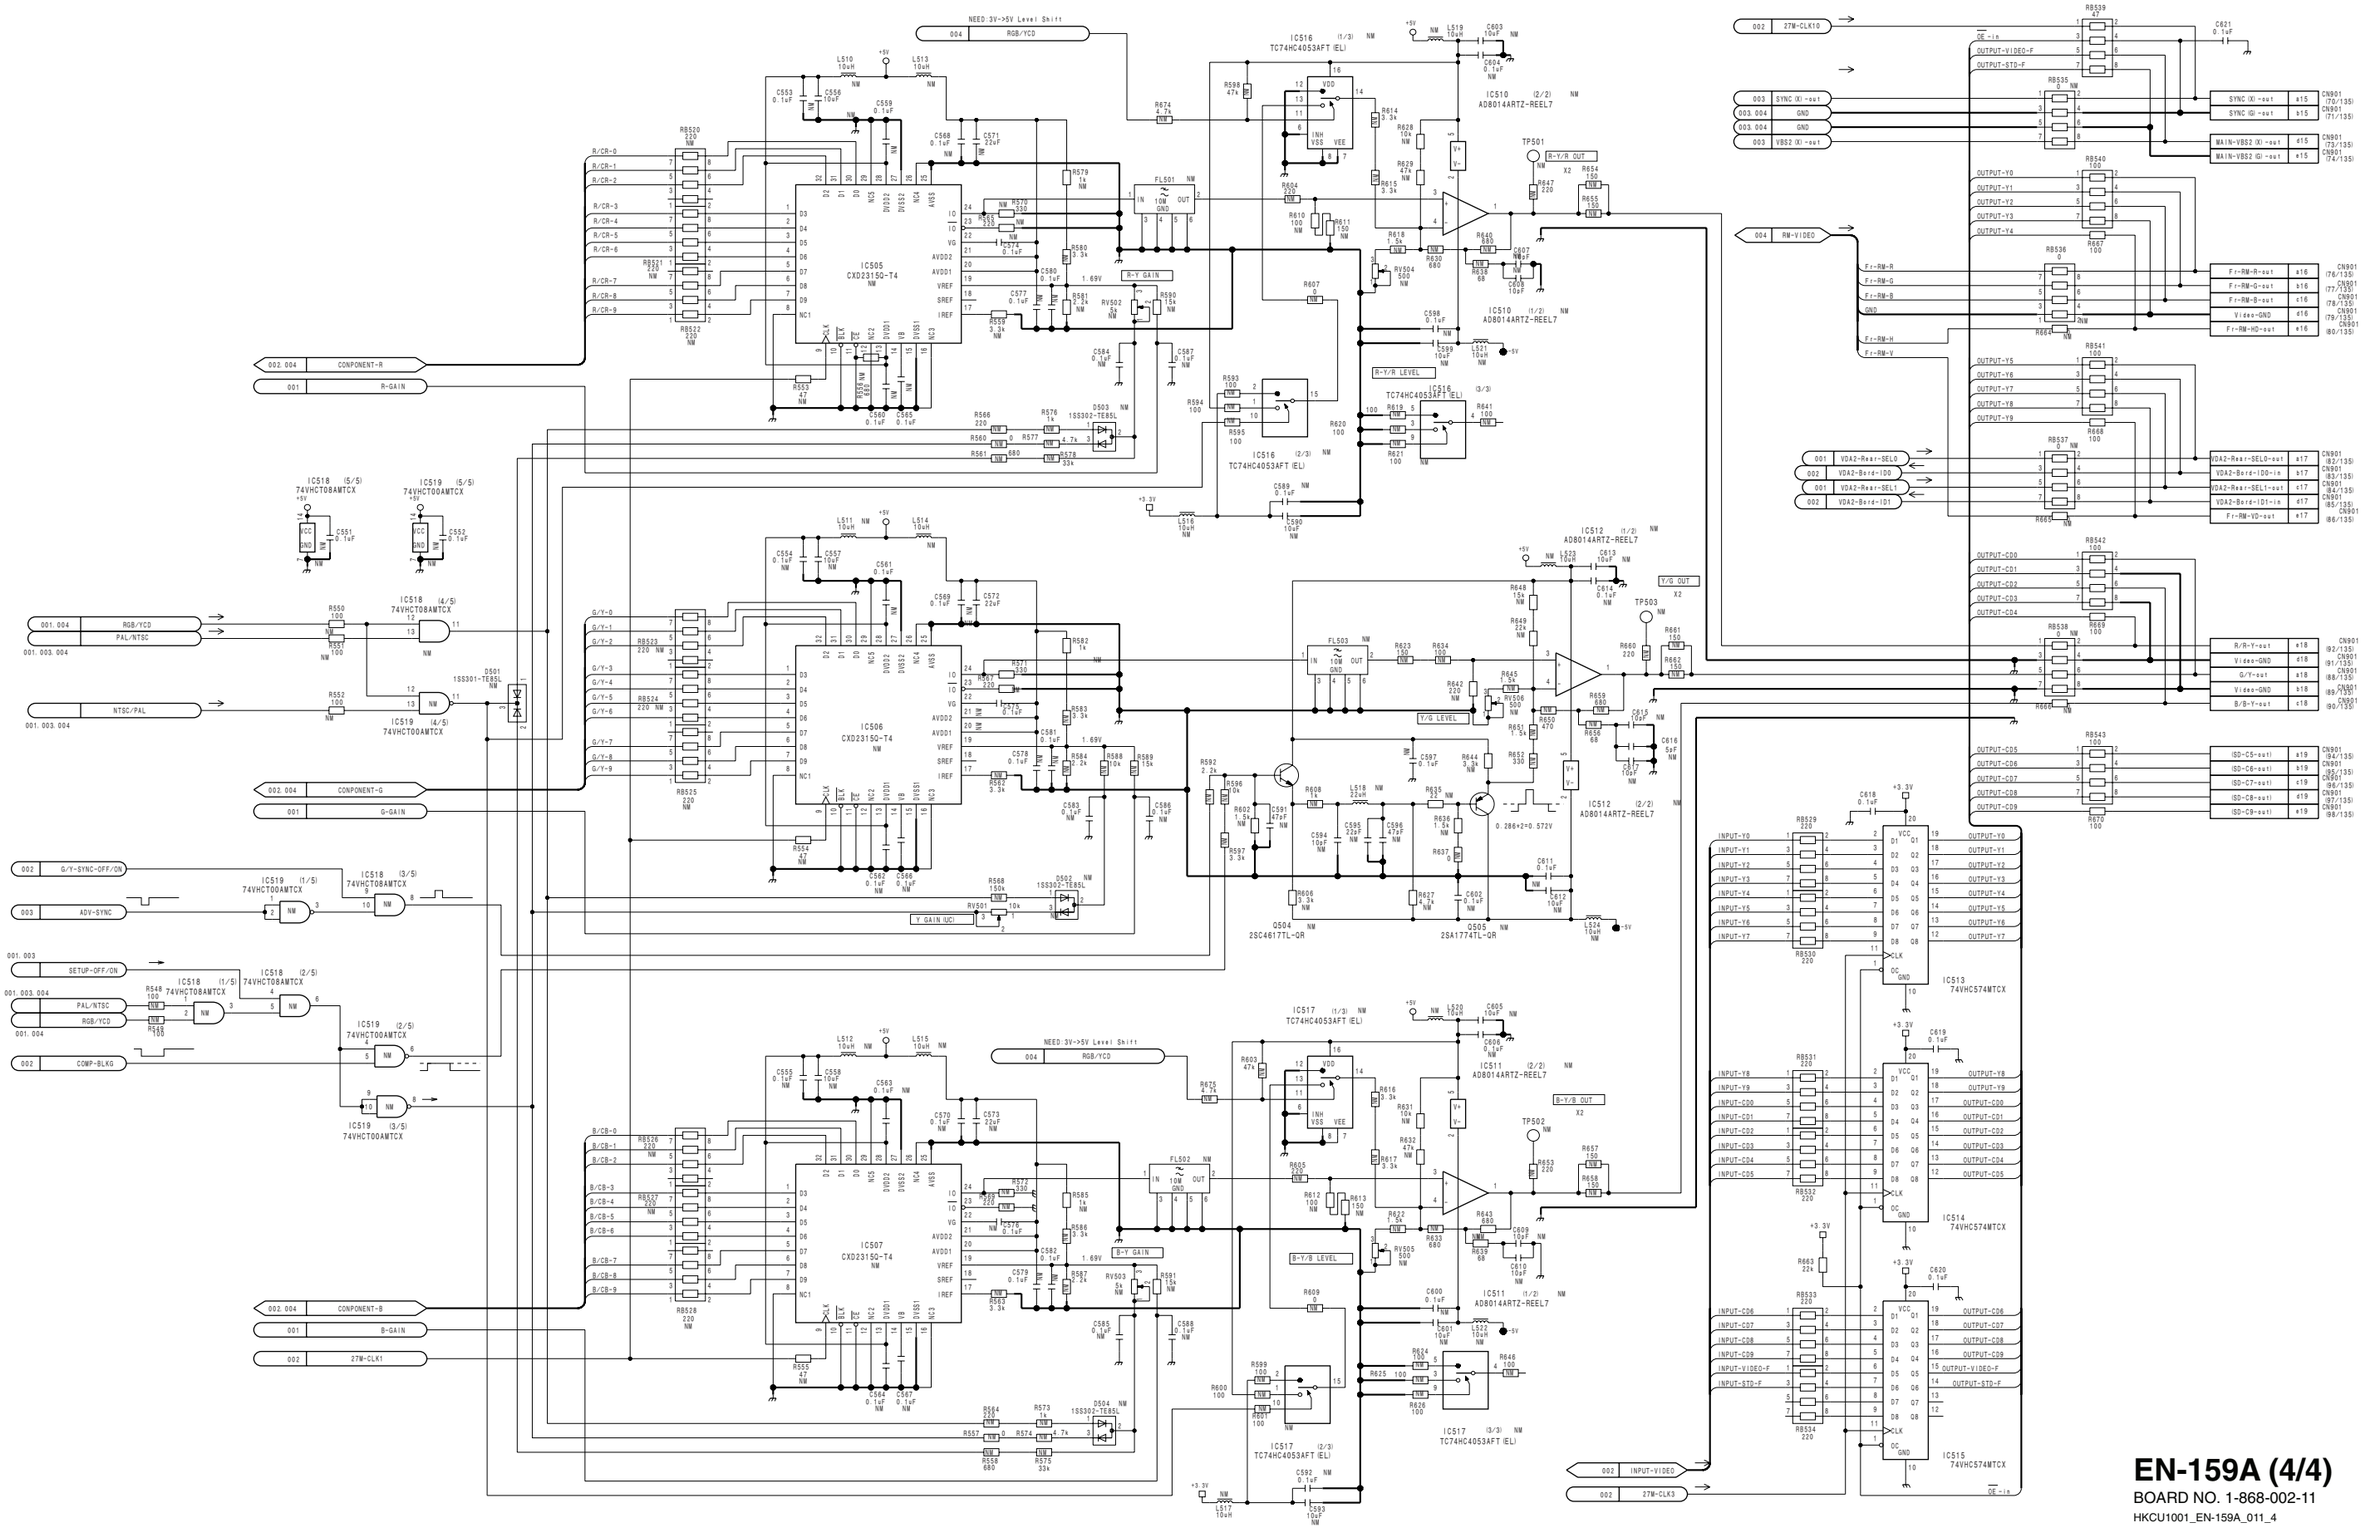


# EN-159A (4/4)
BOARD NO. 1-868-002-11
HKCU1001_EN-159A_011_4

# EN-159B (1/4)
**SUFFIX: -11**

EN-159B (1/4)
SUFFIX: -11

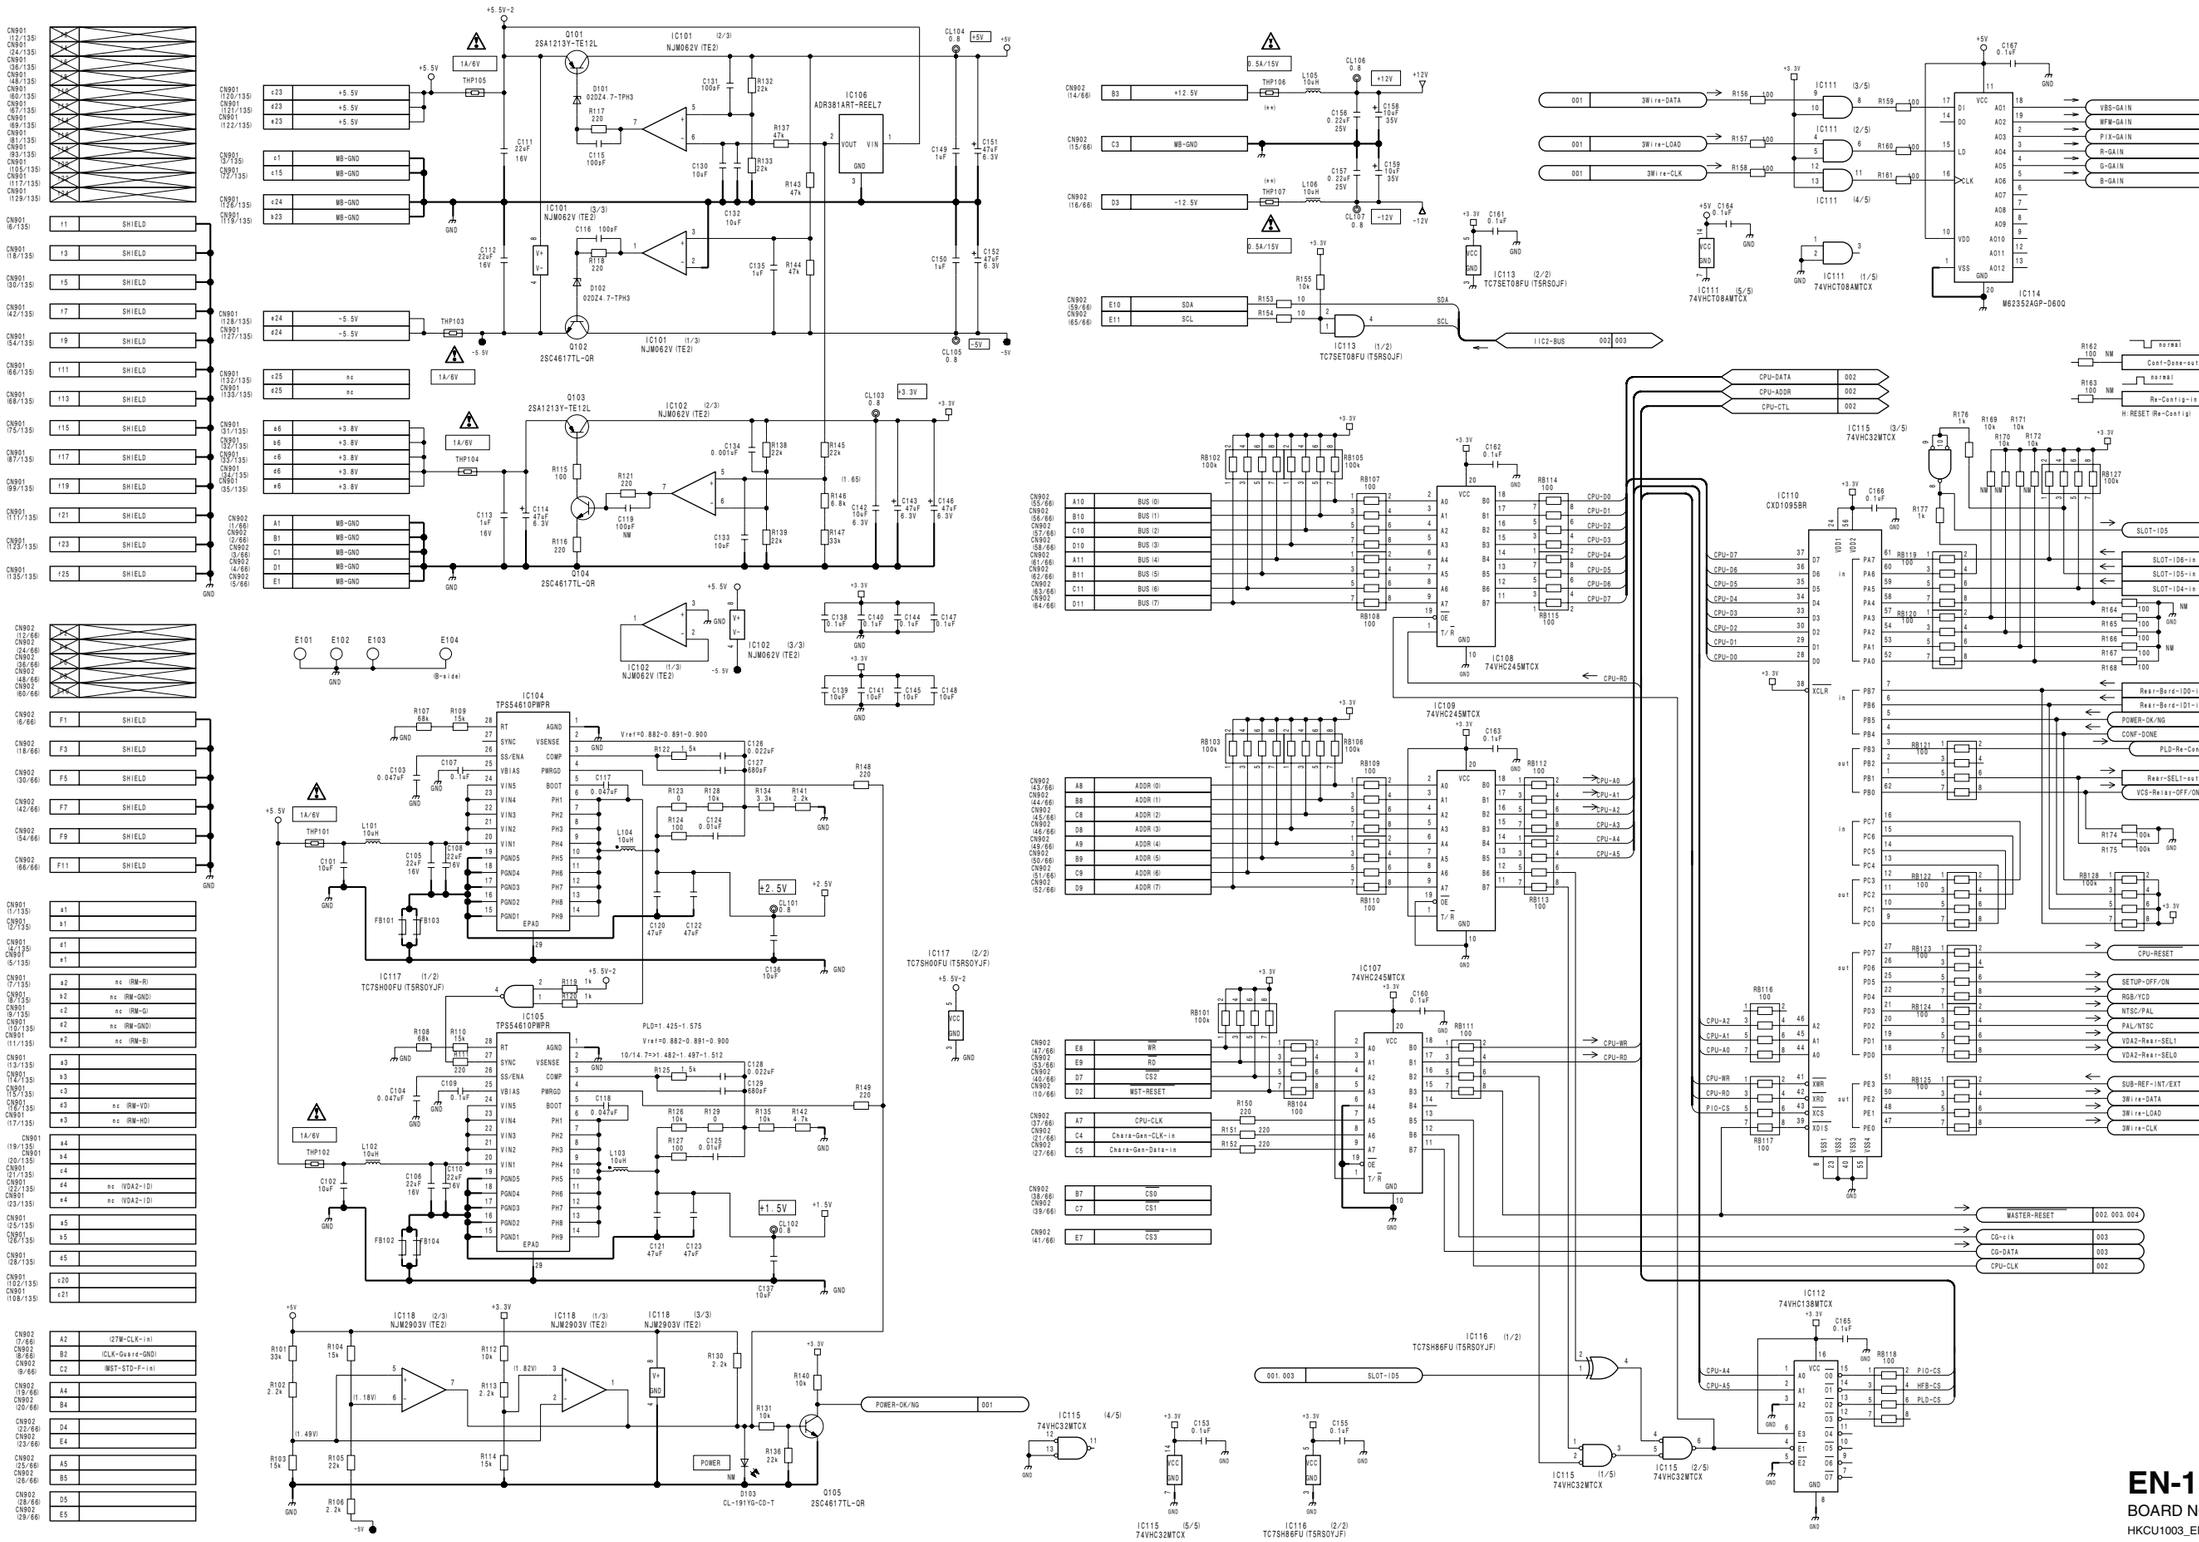


EN-159B (1/4)

BOARD NO. 1-868-002-11

HKCU1003_EN-159B_011_1

HDCU3300/MM (J,E)

# EN-159B (2/4)
SUFFIX: -11


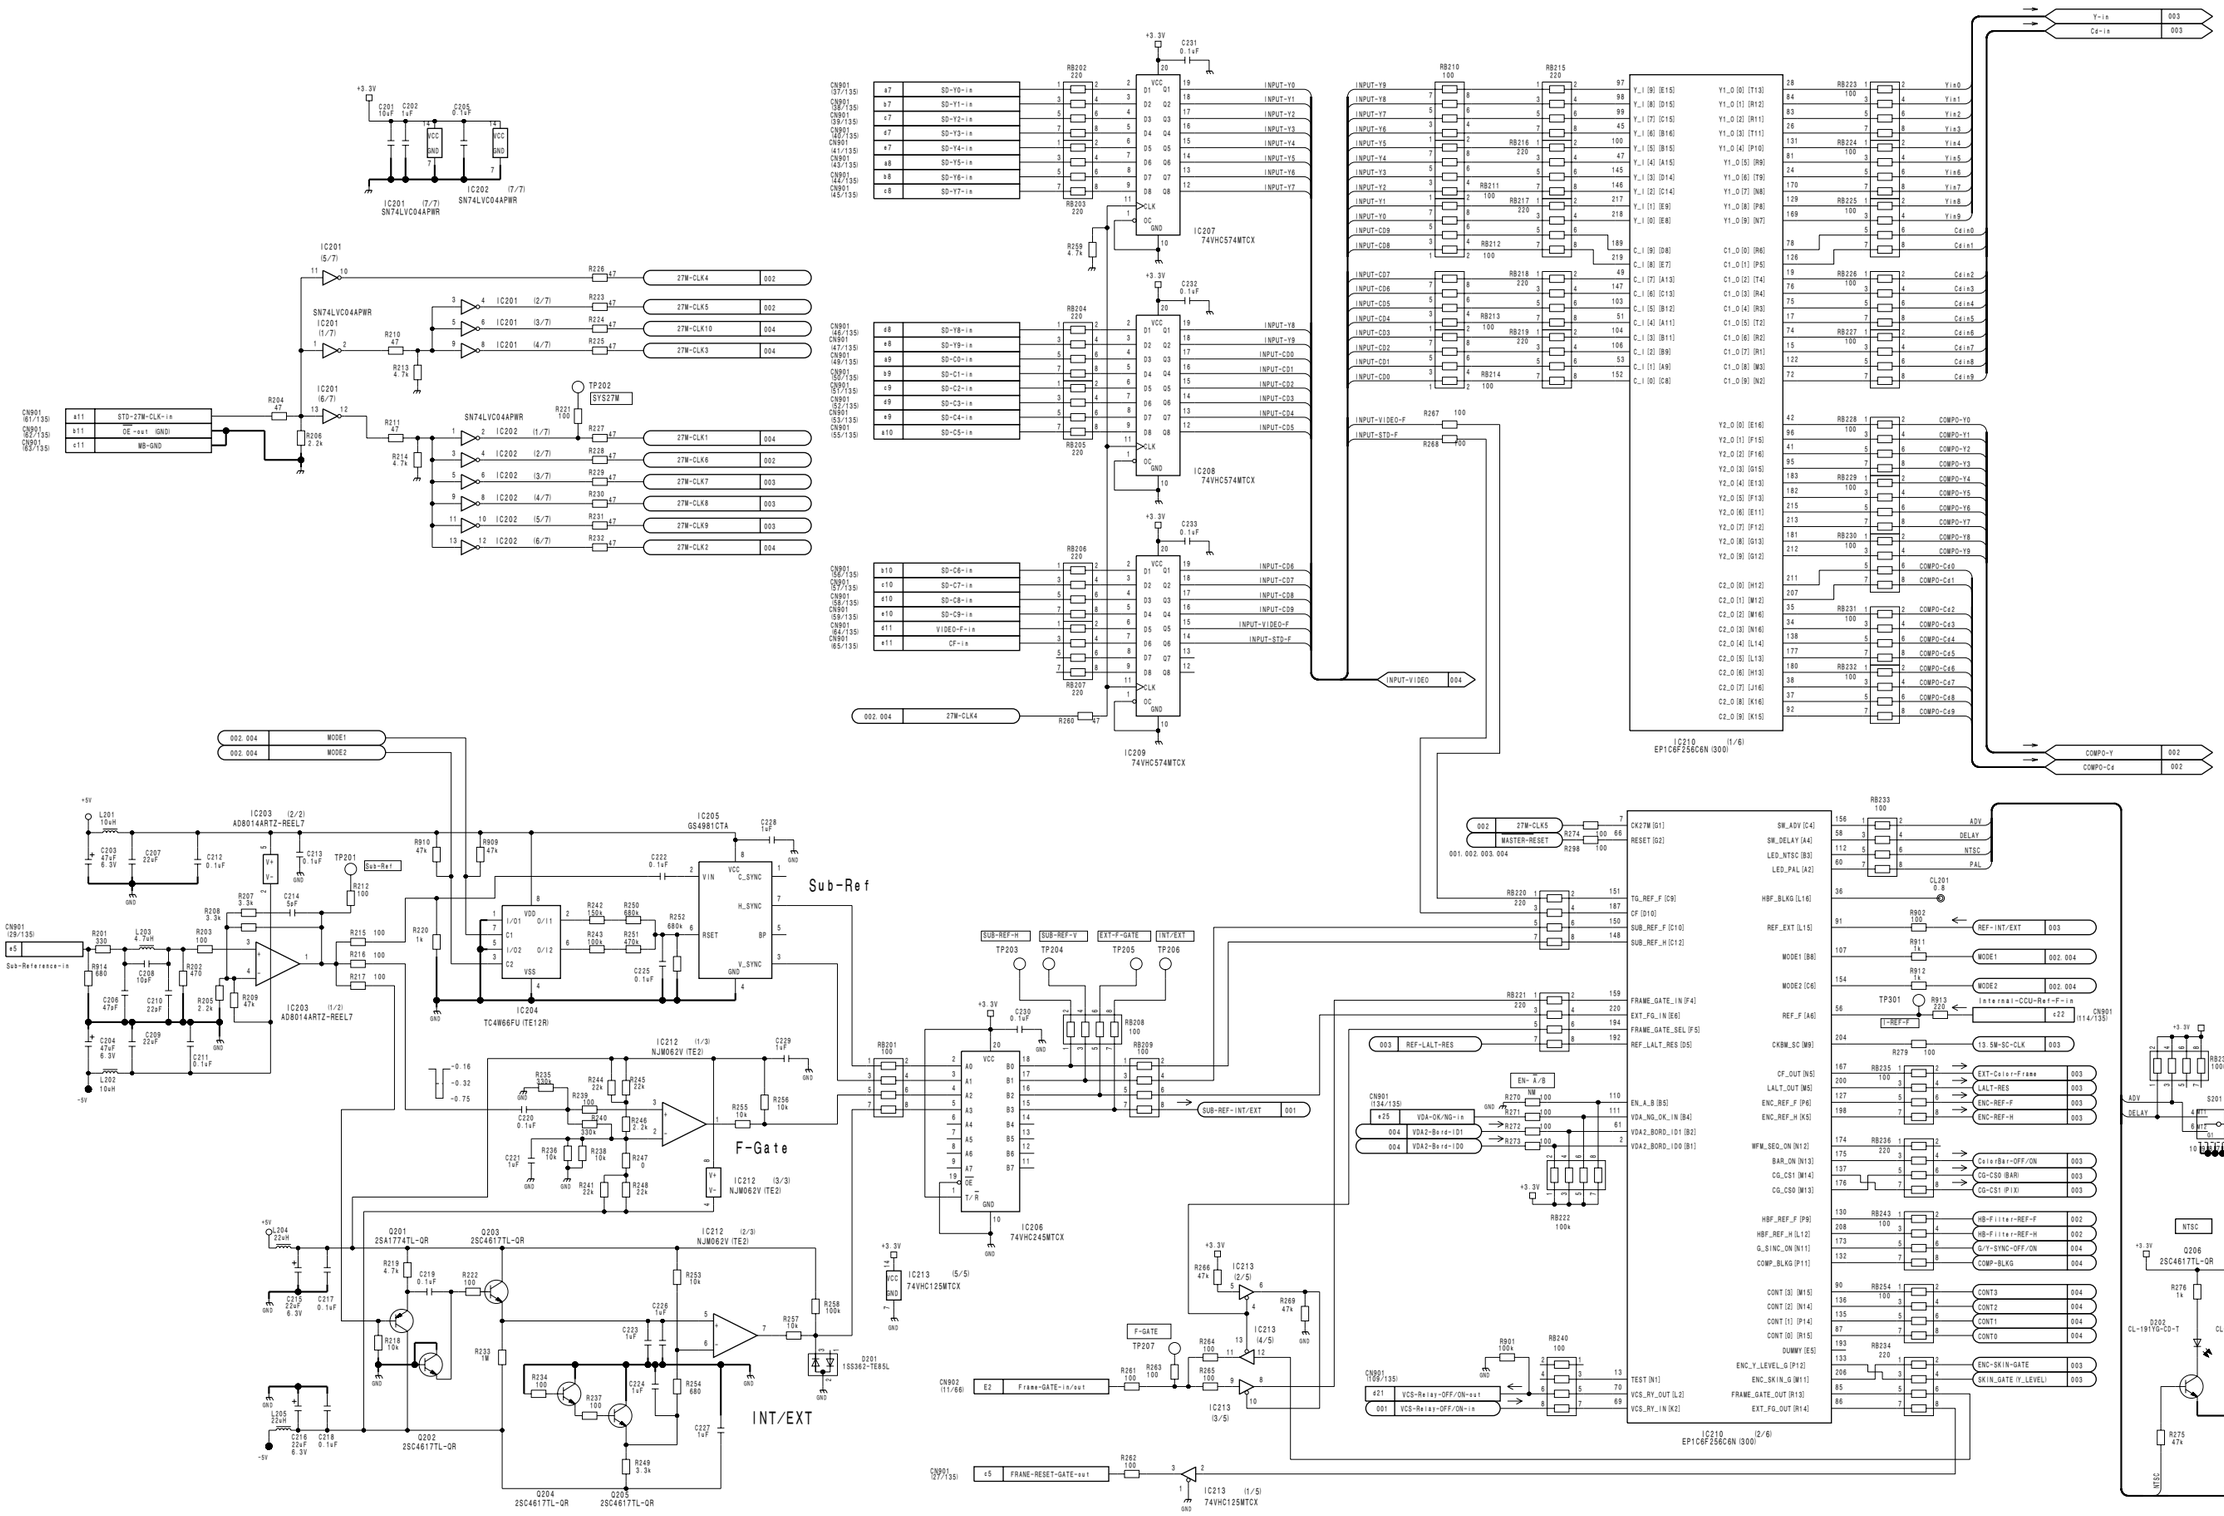




7-92

EN-159B (2/4)
SUFFIX: -11

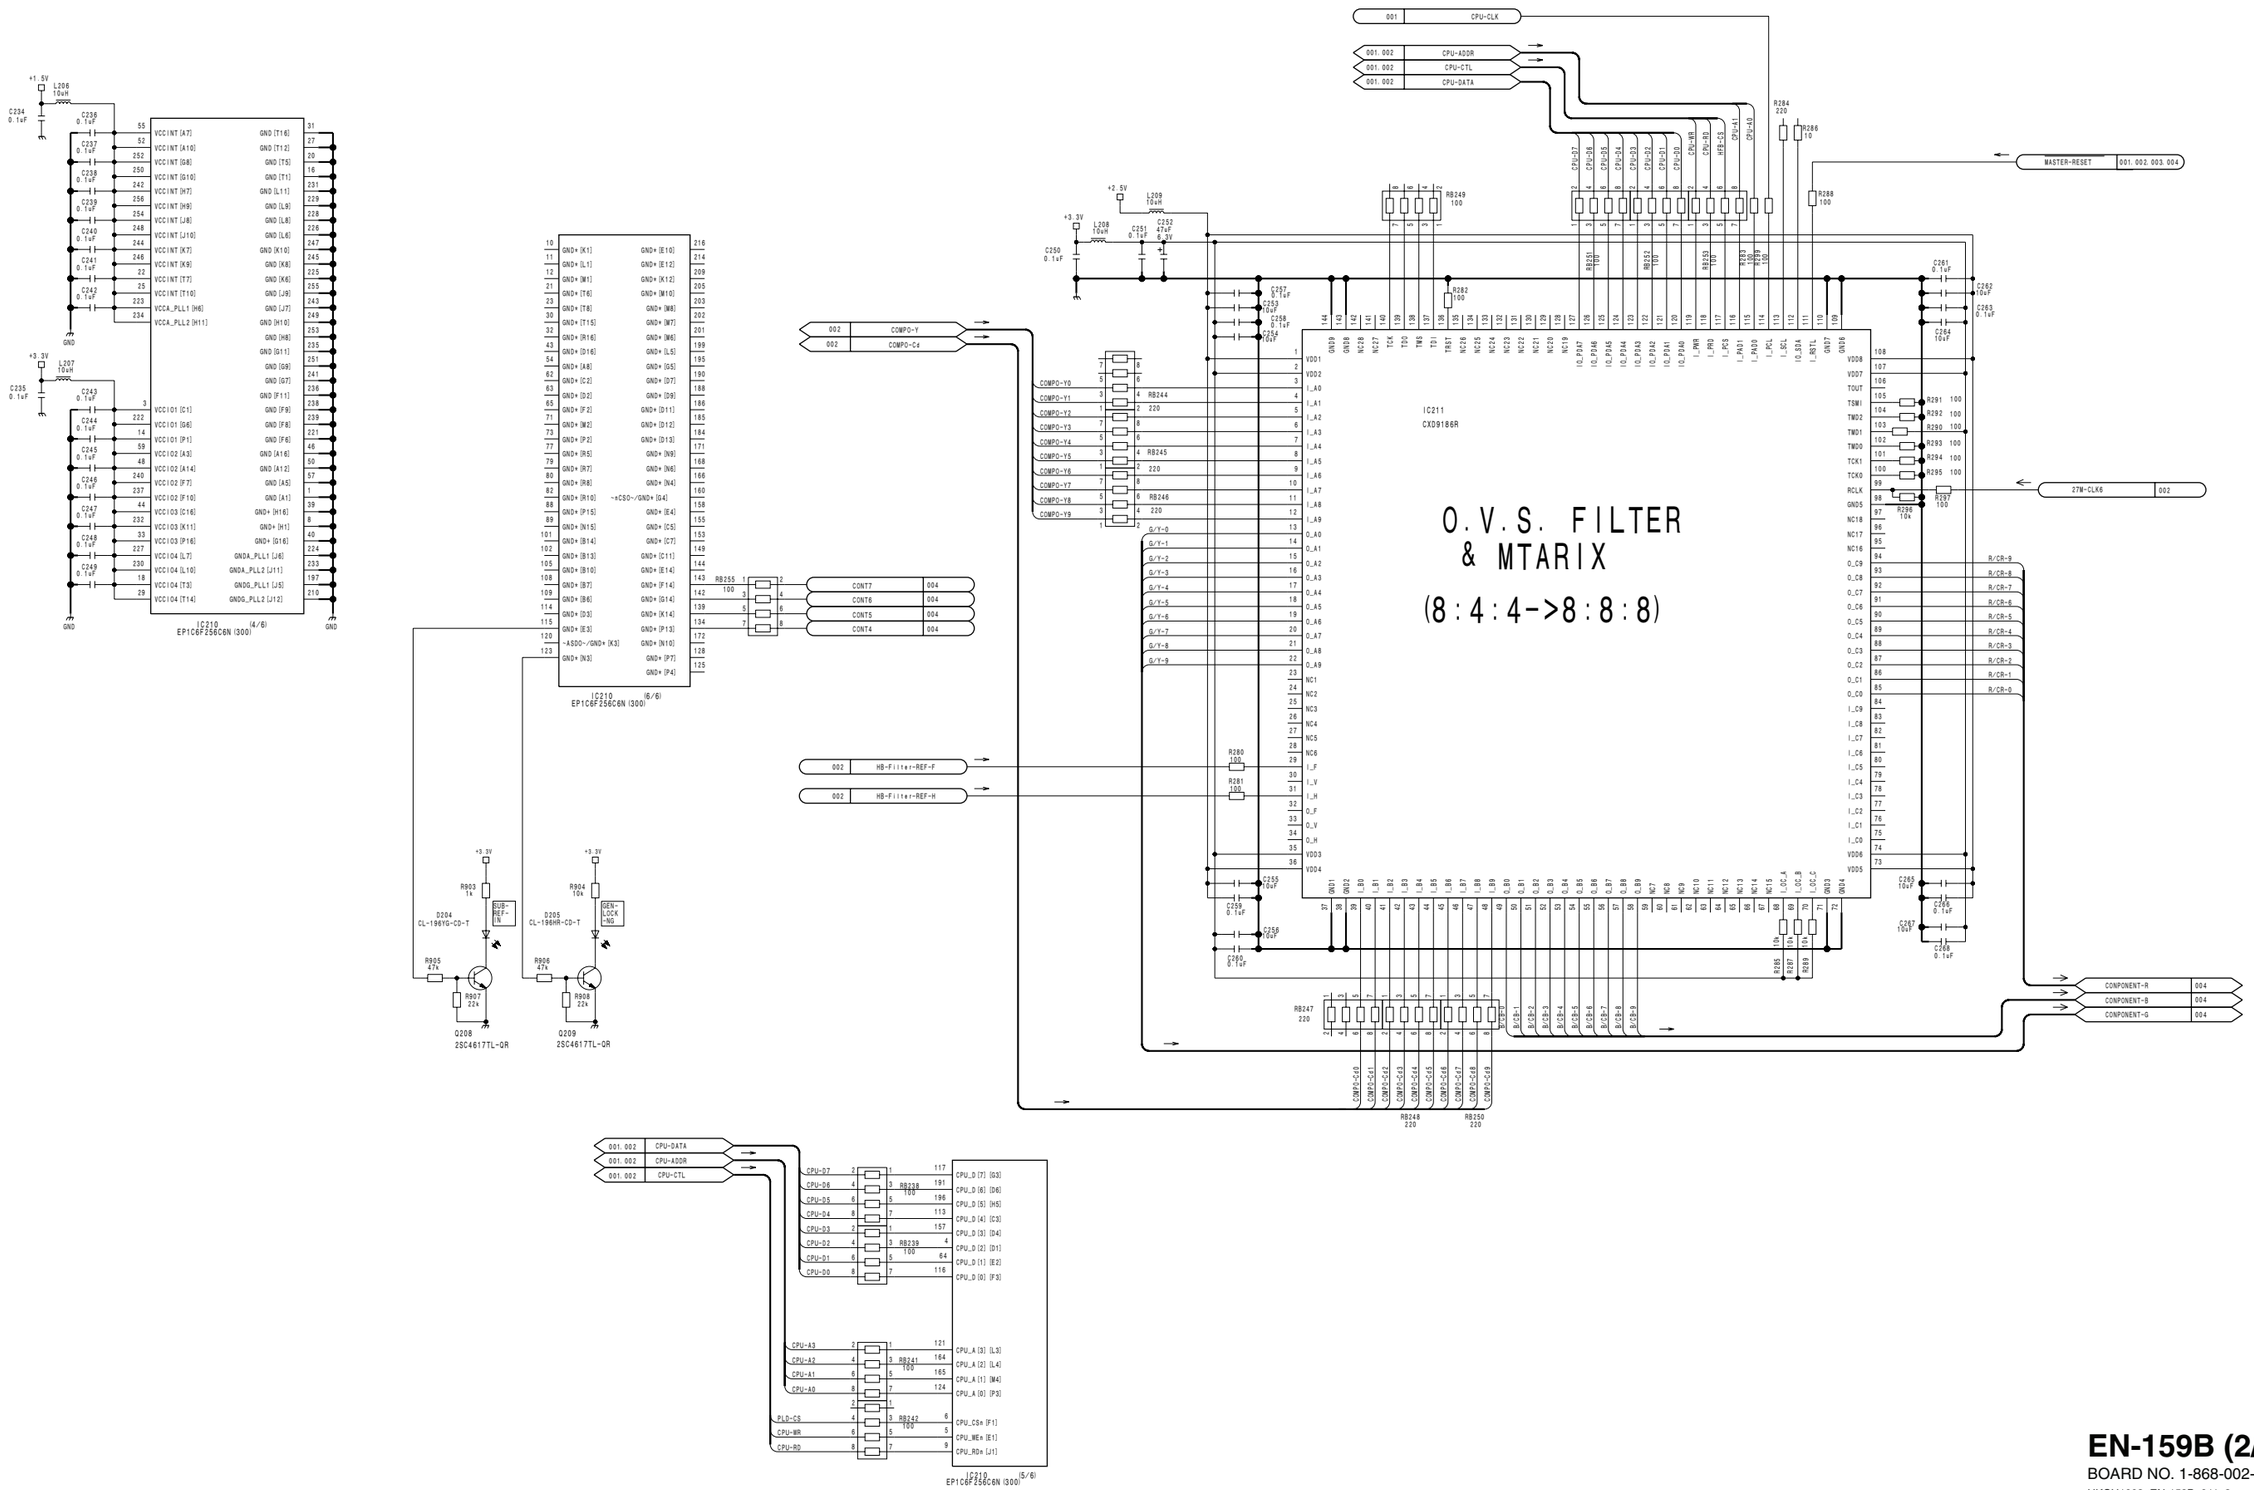




**EN-159B (2/4)**
BOARD NO. 1-868-002-11
HKCU1003_EN-159B_011_2

EN-159B (3/4)
SUFFIX: -11

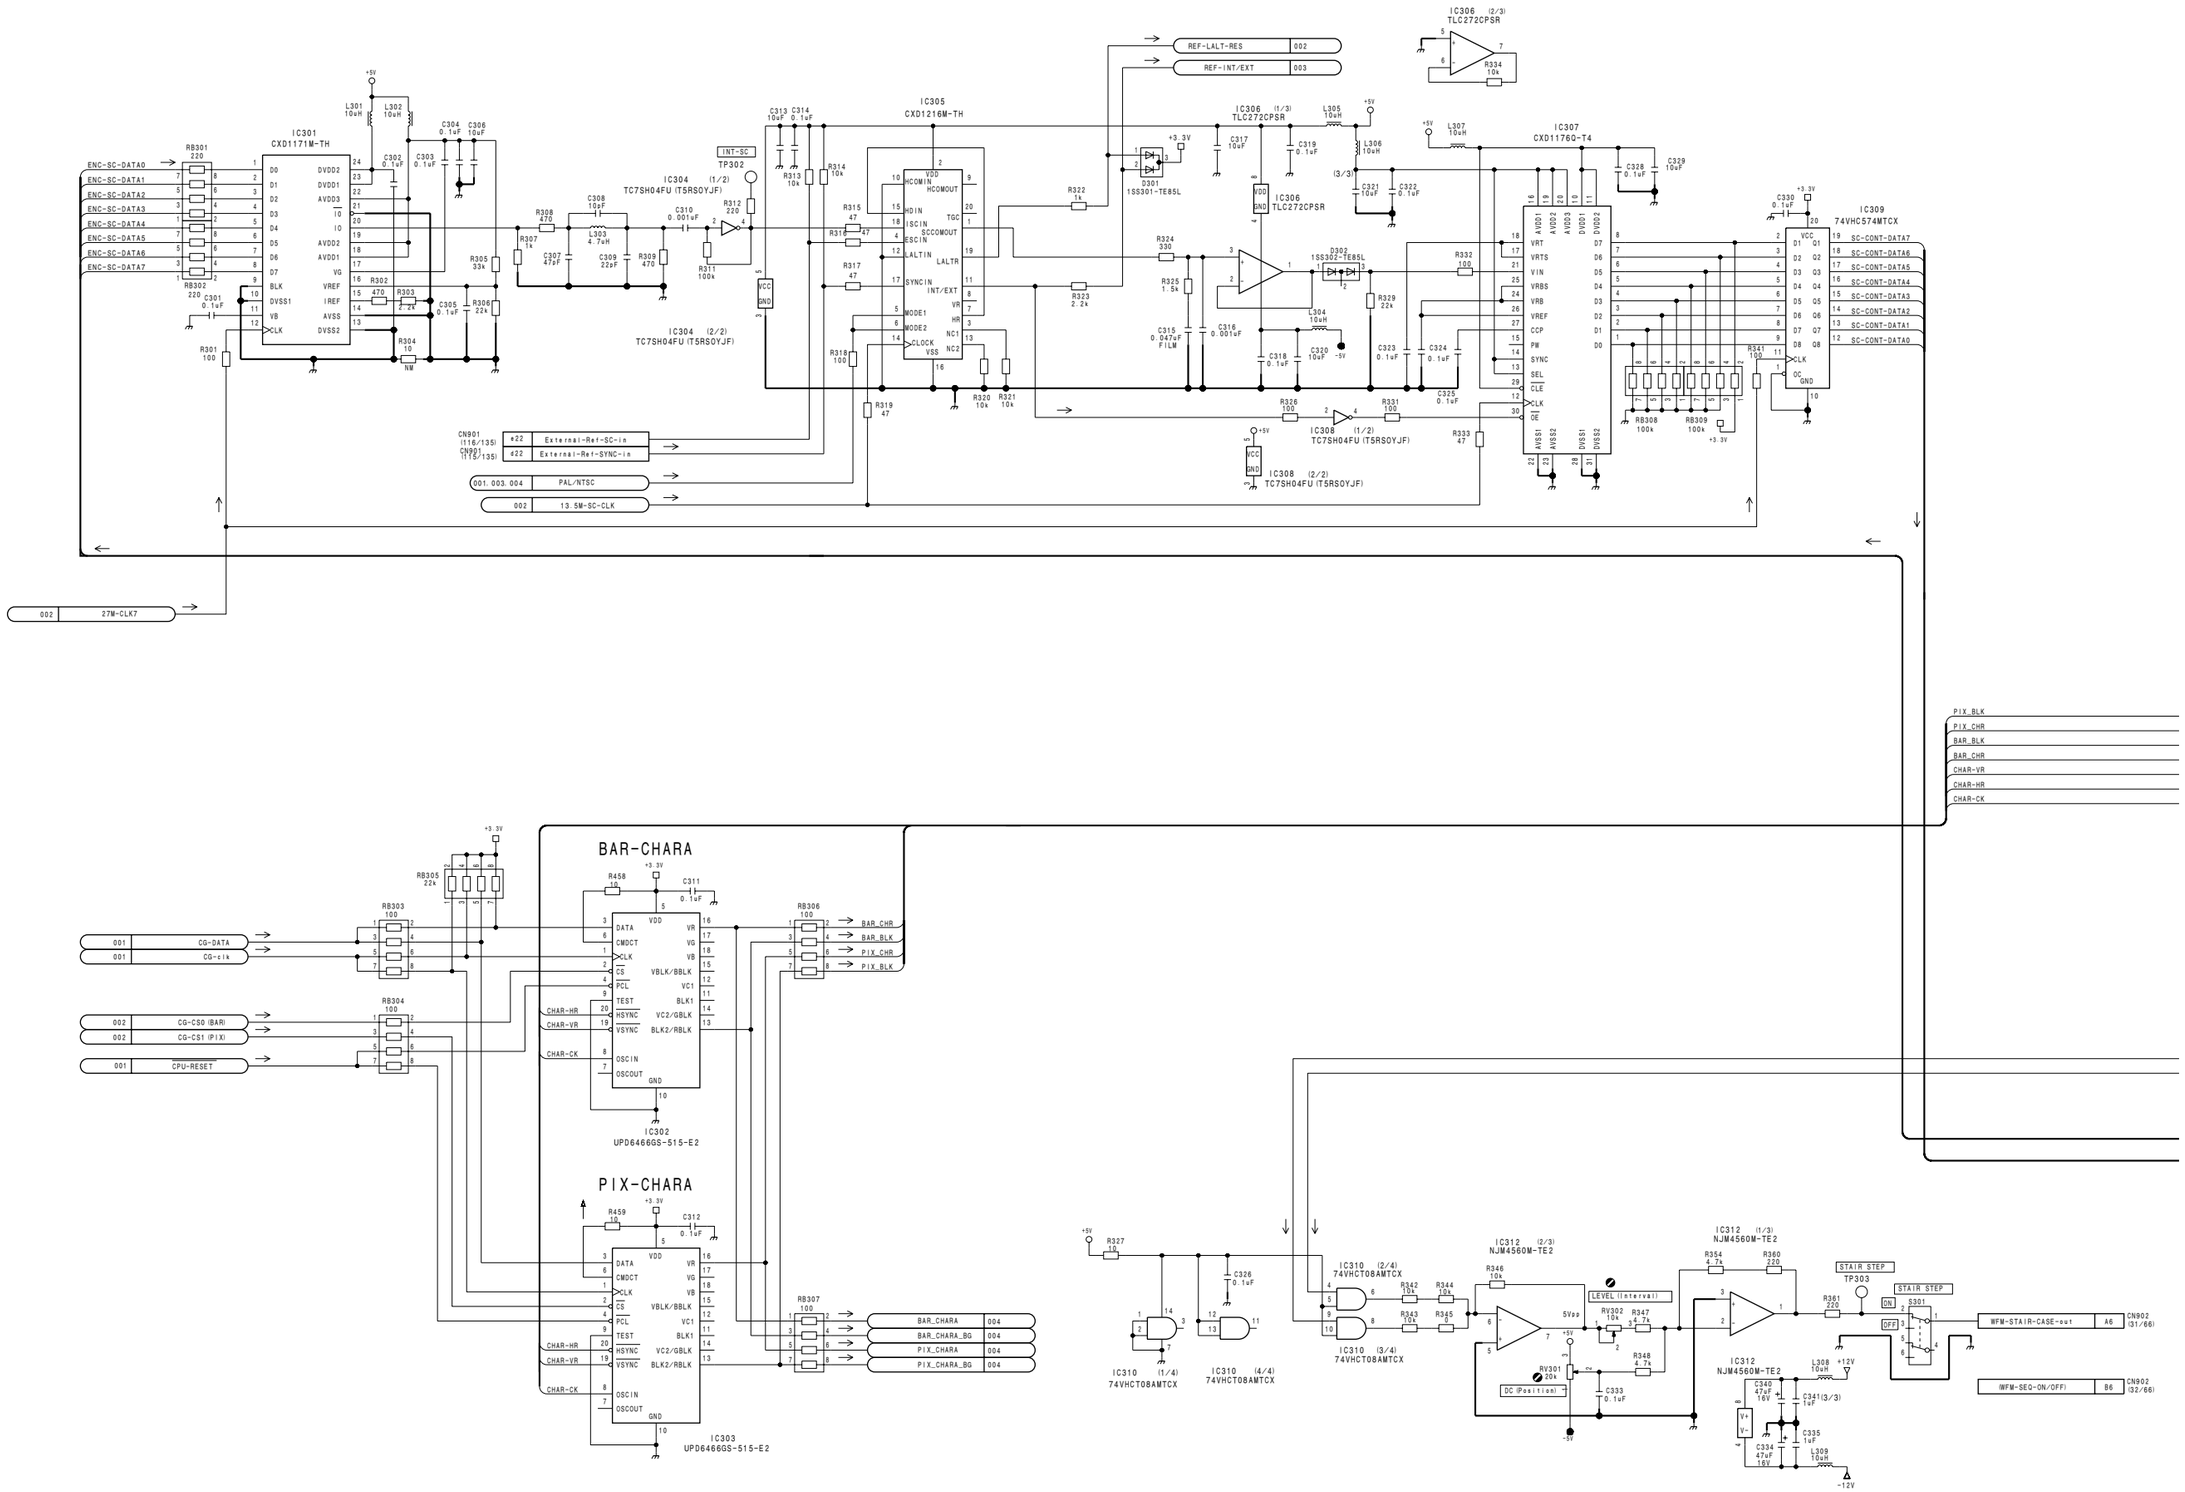



7-94

# EN-159B (3/4)
SUFFIX: -11

EN-159B (3/4)
SUFFIX: -11

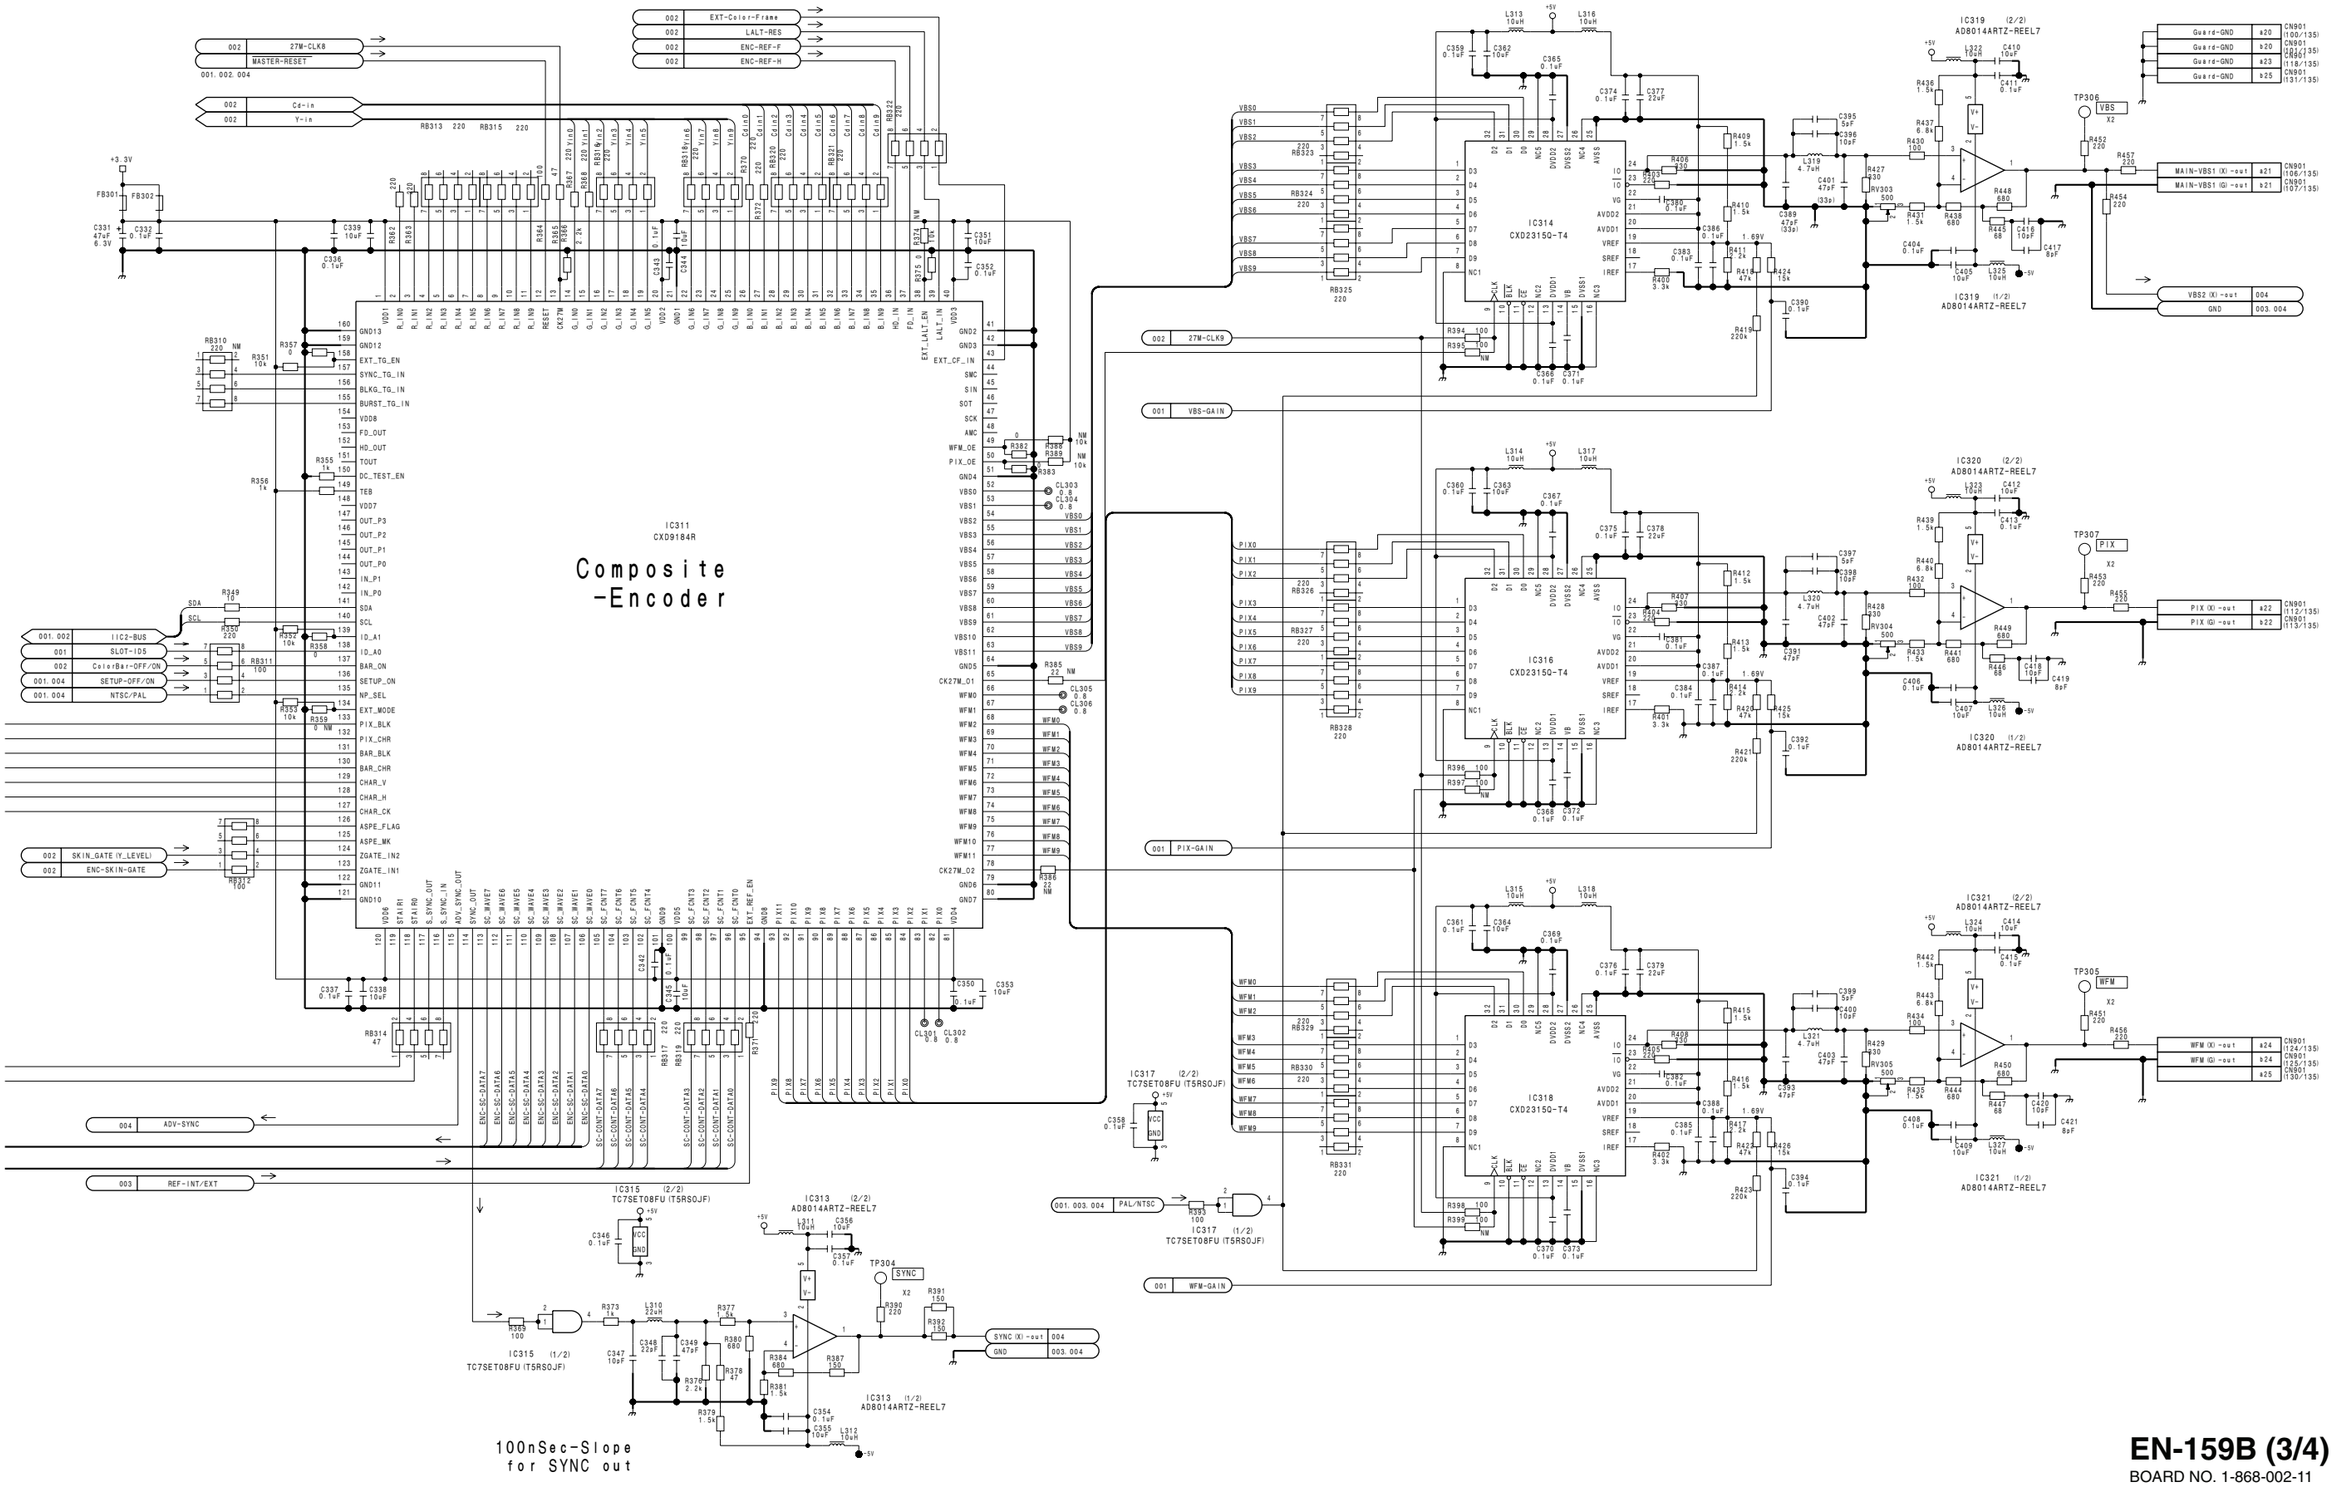


HDCU3300/MM (J,E)

7-95

7-95

# EN-159B (3/4)
BOARD NO. 1-868-002-11
HKCU1003_EN-159B_011_3

EN-159B (4/4)
SUFFIX: -11

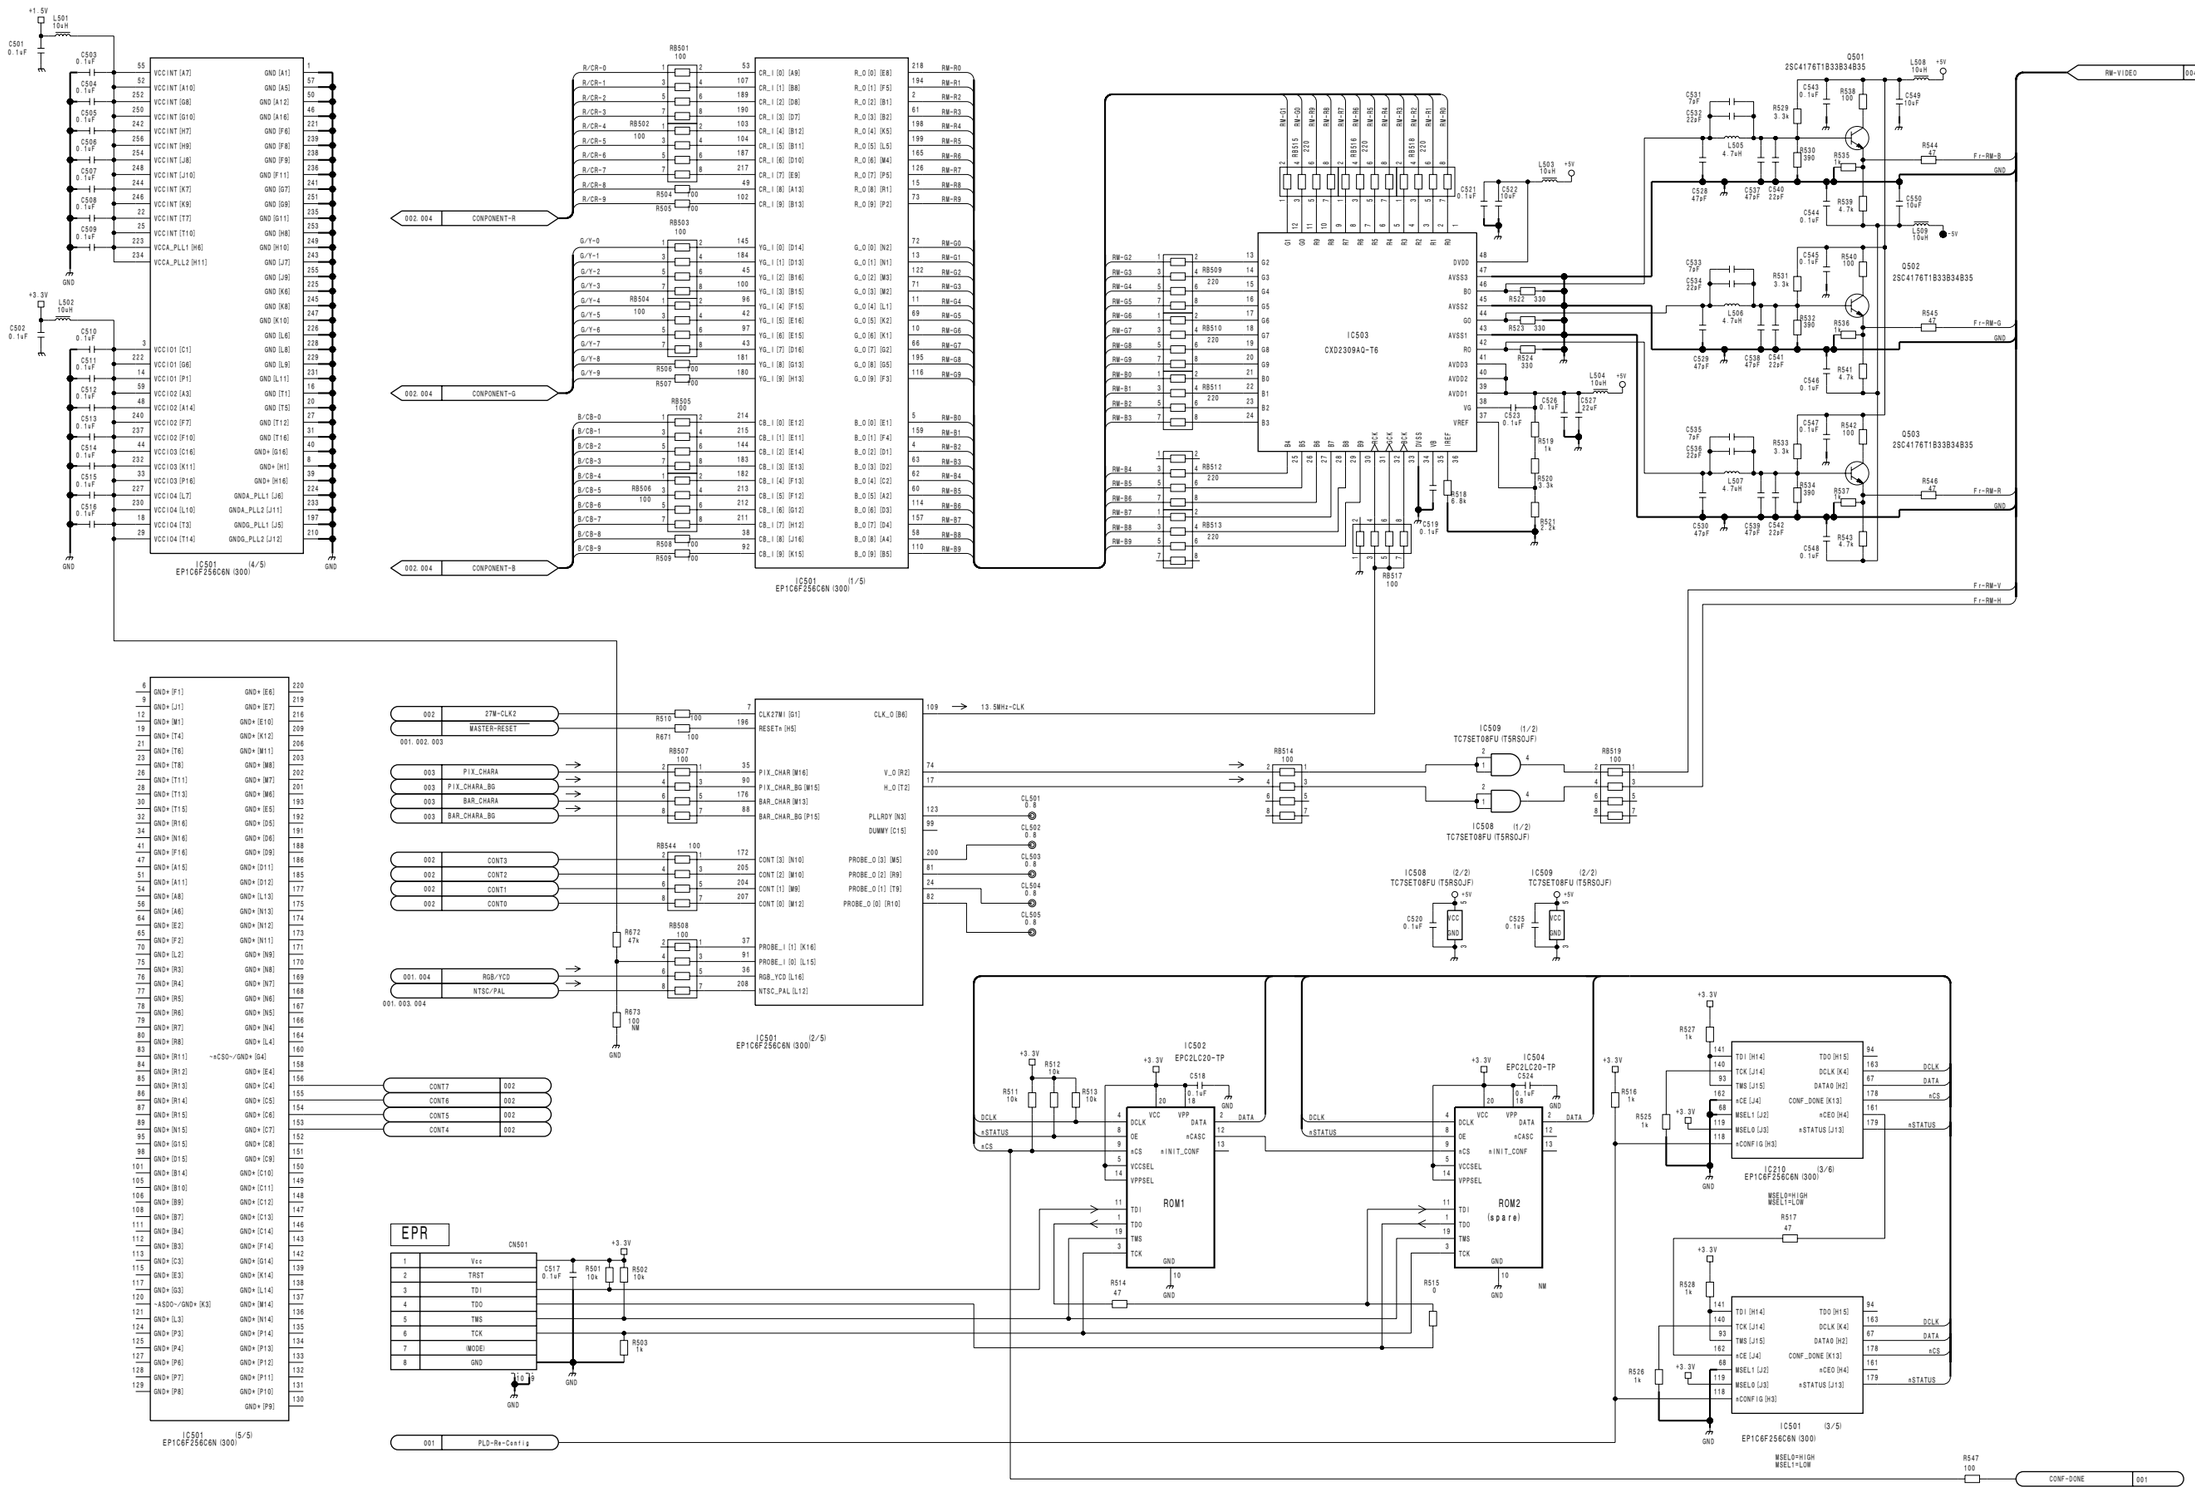



7-96

# EN-159B (4/4)
SUFFIX: -11

# EN-159B (4/4)
SUFFIX: -11

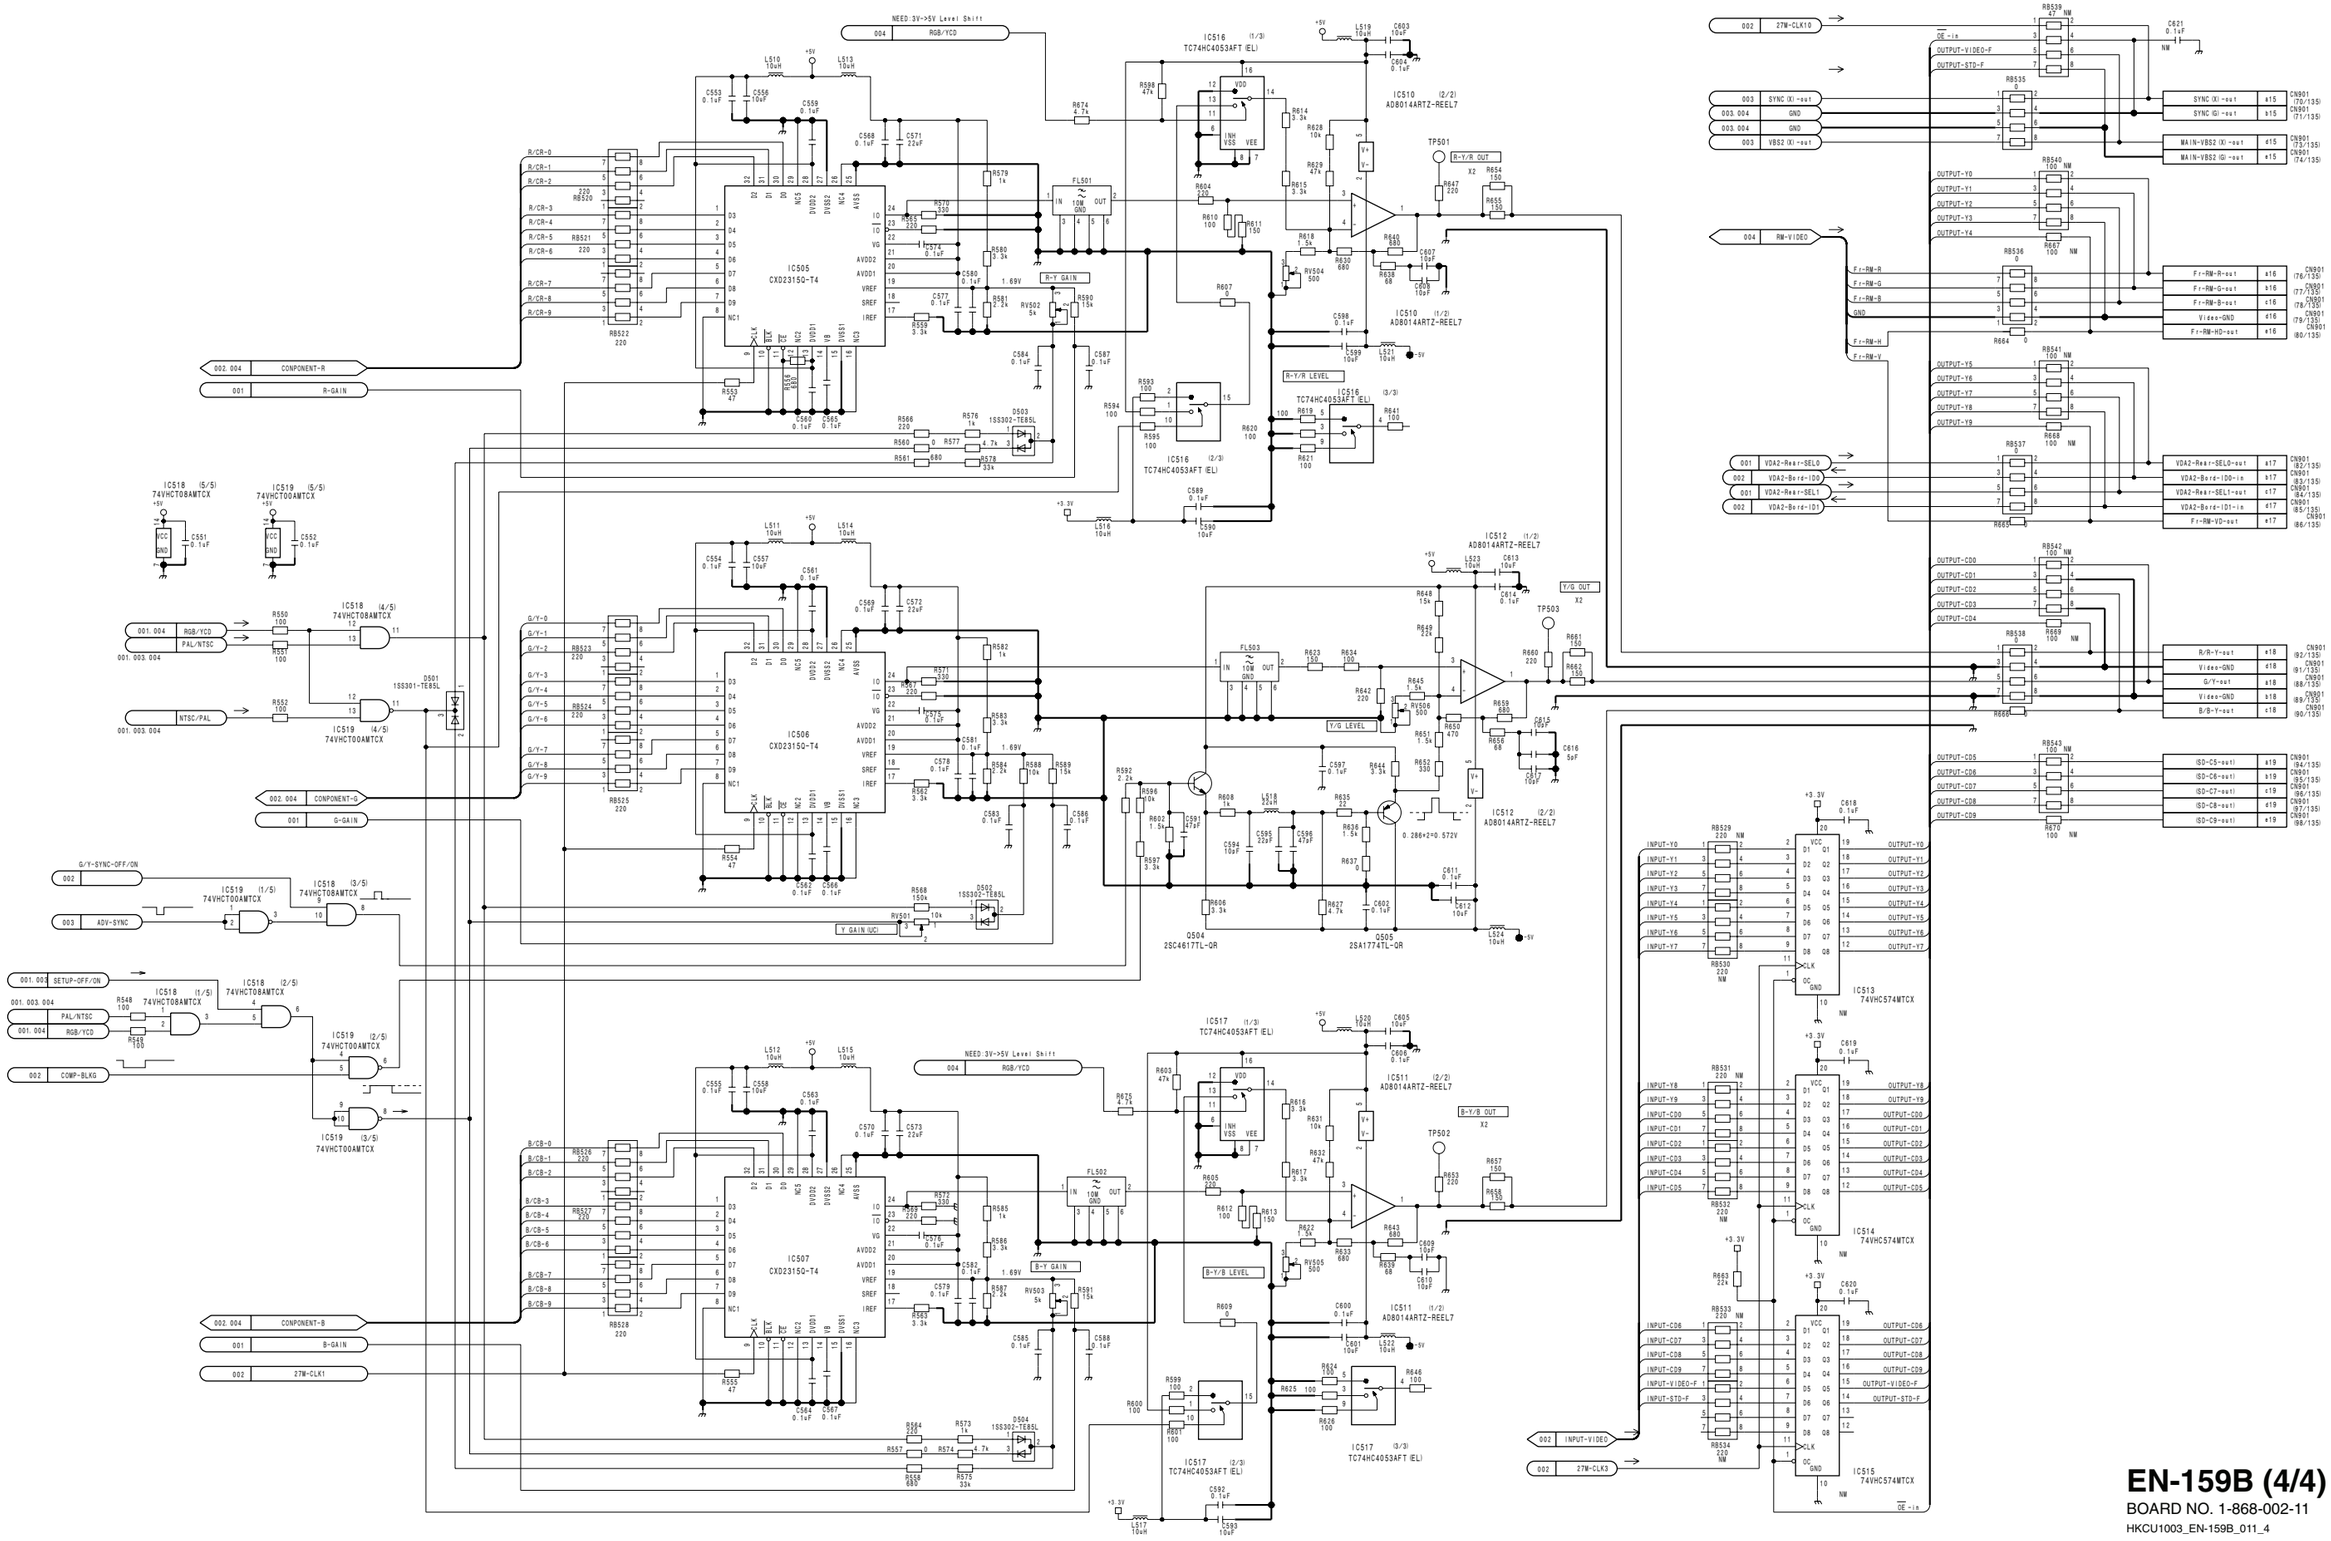


# EN-159B (4/4)
BOARD NO. 1-868-002-11
HKCU1003_EN-159B_011_4

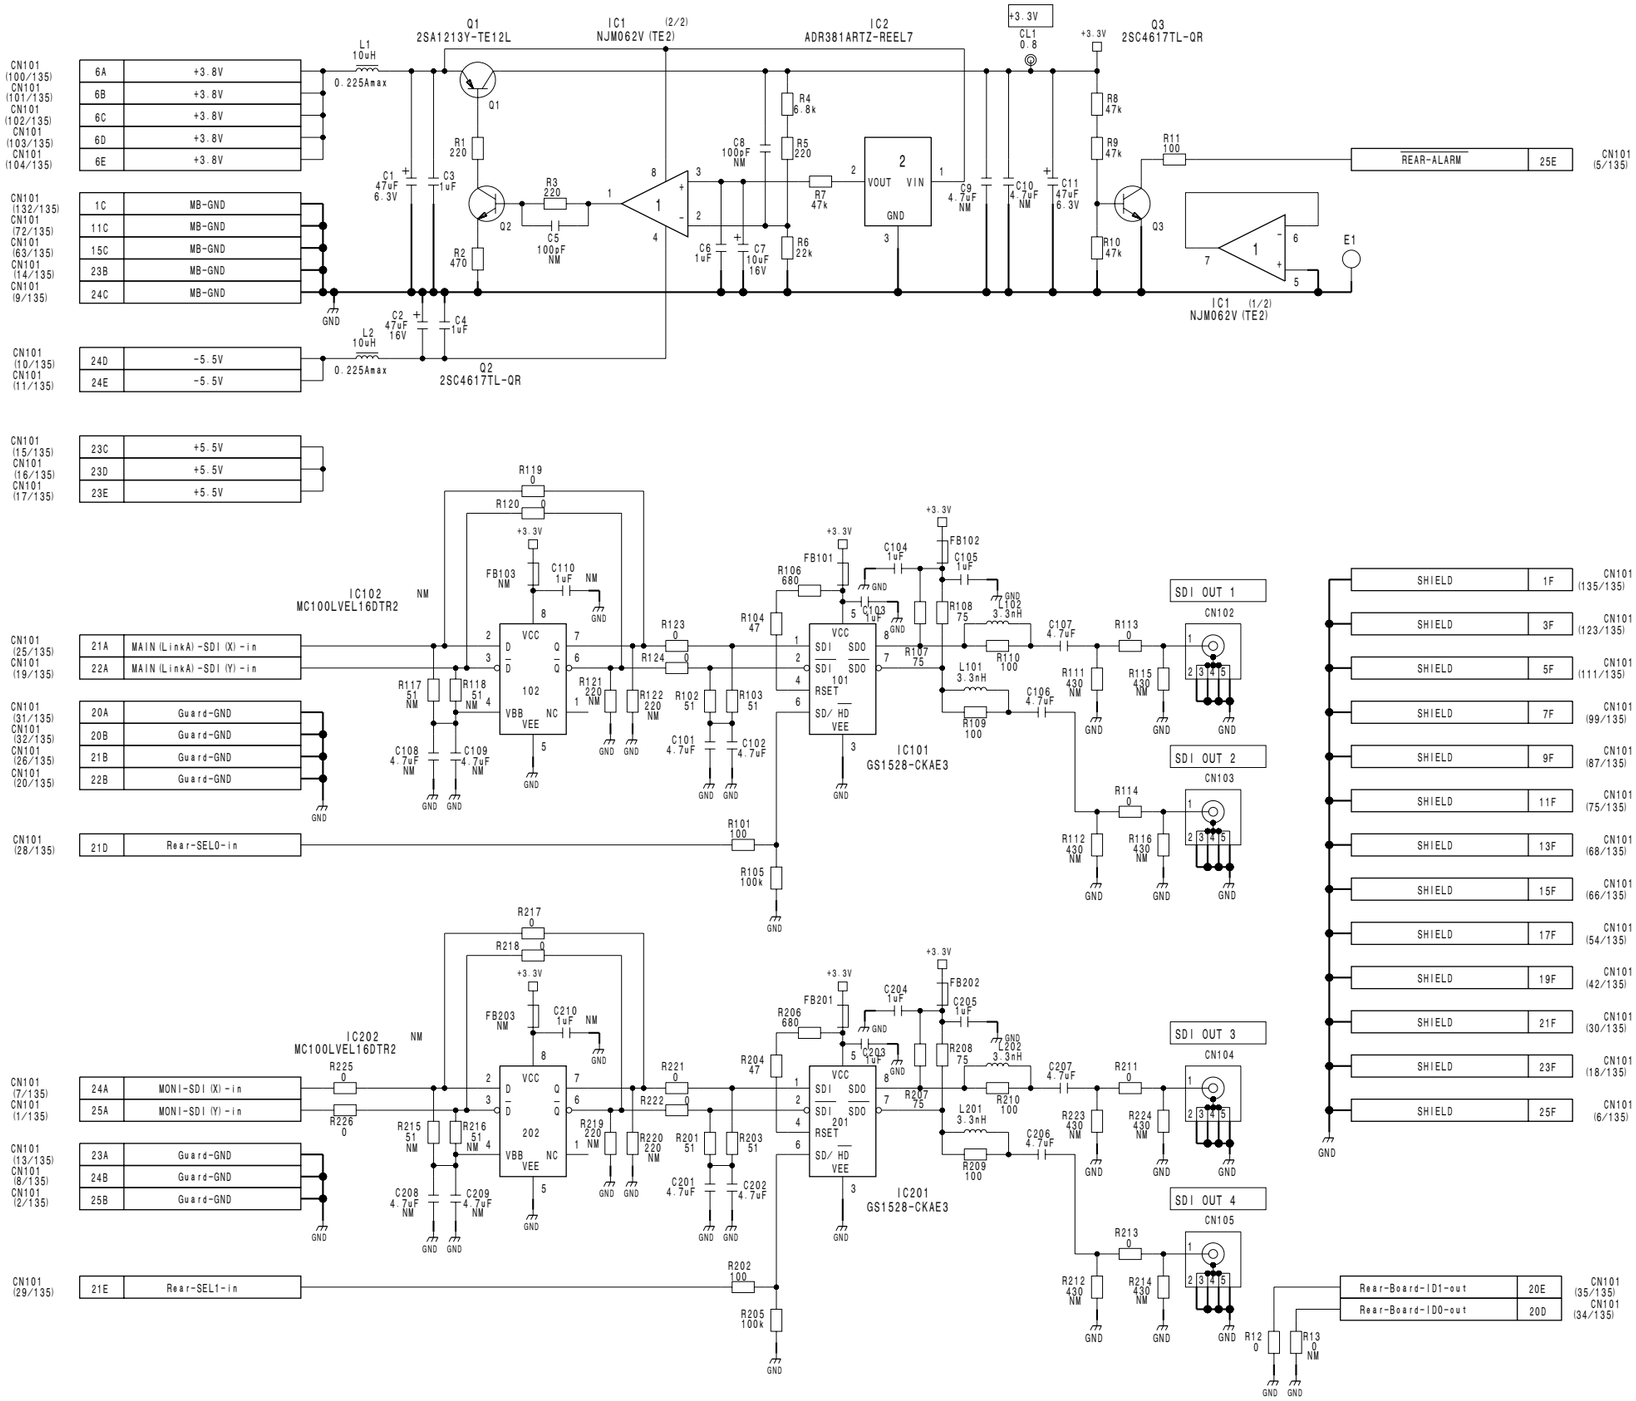


| | | |
|---|---|---|
| SDT-74M-CLK-out | 15A | CN101 (61/135) |
| OE-in | 15B | CN101 (62/135) |
| SKIN-Gate-out | 15D | CN101 (64/135) |
| SDTD-HD/SD-F-out | 15E | CN101 (65/135) |
| HD-LinkA-Y0-out | 16A | CN101 (55/135) |
| HD-LinkA-Y1-out | 16B | CN101 (56/135) |
| HD-LinkA-Y2-out | 16C | CN101 (57/135) |
| HD-LinkA-Y3-out | 16D | CN101 (58/135) |
| HD-LinkA-Y4-out | 16E | CN101 (59/135) |
| HD-LinkA-Y5-out | 17A | CN101 (49/135) |
| HD-LinkA-Y6-out | 17B | CN101 (50/135) |
| HD-LinkA-Y7-out | 17C | CN101 (51/135) |
| HD-LinkA-Y8-out | 17D | CN101 (52/135) |
| HD-LinkA-Y9-out | 17E | CN101 (53/135) |
| HD-LinkA-C0-out | 18A | CN101 (43/135) |
| HD-LinkA-C1-out | 18B | CN101 (44/135) |
| HD-LinkA-C2-out | 18C | CN101 (45/135) |
| HD-LinkA-C3-out | 18D | CN101 (46/135) |
| HD-LinkA-C4-out | 18E | CN101 (47/135) |
| HD-LinkA-C5-out | 19A | CN101 (37/135) |
| HD-LinkA-C6-out | 19B | CN101 (38/135) |
| HD-LinkA-C7-out | 19C | CN101 (39/135) |
| HD-LinkA-C8-out | 19D | CN101 (40/135) |
| HD-LinkA-C9-out | 19E | CN101 (41/135) |
| RM-PIX-S(G)-out | 20C | CN101 (33/135) |
| RM-PIX-S(X)-out | 21C | CN101 (27/135) |
| CCU-Ref-F-in | 22C | CN101 (21/135) |
| External-Ref-SYNC-in | 22D | CN101 (22/135) |
| External-Ref-SC-in | 22E | CN101 (23/135) |
| nc | 25C | CN101 (3/135) |
| nc | 25D | CN101 (4/135) |

| | | |
|---|---|---|
| CHU-74M-CLK-in | 1A | CN101 (130/135) |
| OE-out | 1B | CN101 (131/135) |
| CCD-F-acm-in | 1D | CN101 (133/135) |
| CHU-LinkA-F-in | 1E | CN101 (134/135) |
| CHU-LinkA-Y0-in | 2A | CN101 (124/135) |
| CHU-LinkA-Y1-in | 2B | CN101 (125/135) |
| CHU-LinkA-Y2-in | 2C | CN101 (126/135) |
| CHU-LinkA-Y3-in | 2D | CN101 (127/135) |
| CHU-LinkA-Y4-in | 2E | CN101 (128/135) |
| CHU-LinkA-Y5-in | 3A | CN101 (118/135) |
| CHU-LinkA-Y6-in | 3B | CN101 (119/135) |
| CHU-LinkA-Y7-in | 3C | CN101 (120/135) |
| CHU-LinkA-Y8-in | 3D | CN101 (121/135) |
| CHU-LinkA-Y9-in | 3E | CN101 (122/135) |
| CHU-LinkA-C0-in | 4A | CN101 (112/135) |
| CHU-LinkA-C1-in | 4B | CN101 (113/135) |
| CHU-LinkA-C2-in | 4C | CN101 (114/135) |
| CHU-LinkA-C3-in | 4D | CN101 (115/135) |
| CHU-LinkA-C4-in | 4E | CN101 (116/135) |
| CHU-LinkA-C5-in | 5A | CN101 (106/135) |
| CHU-LinkA-C6-in | 5B | CN101 (107/135) |
| CHU-LinkA-C7-in | 5C | CN101 (108/135) |
| CHU-LinkA-C8-in | 5D | CN101 (109/135) |
| CHU-LinkA-C9-in | 5E | CN101 (110/135) |
| | 7A | CN101 (94/135) |
| | 7B | CN101 (95/135) |
| | 7C | CN101 (96/135) |
| | 7D | CN101 (97/135) |
| | 7E | CN101 (98/135) |
| | 8A | CN101 (88/135) |
| | 8B | CN101 (89/135) |
| | 8C | CN101 (90/135) |
| | 8D | CN101 (91/135) |
| | 8E | CN101 (92/135) |
| | 9A | CN101 (82/135) |
| | 9B | CN101 (83/135) |
| | 9C | CN101 (84/135) |
| | 9D | CN101 (85/135) |
| | 9E | CN101 (86/135) |
| | 10A | CN101 (76/135) |
| | 10B | CN101 (77/135) |
| | 10C | CN101 (78/135) |
| | 10D | CN101 (79/135) |
| | 10E | CN101 (80/135) |
| MST-74M-CLK-B-in | 11A | CN101 (70/135) |
| OE-out | 11B | CN101 (71/135) |
| MST-HD-H-B-in | 11D | CN101 (73/135) |
| MST-HD-F-B-in | 11E | CN101 (74/135) |

**HIF-25**
BOARD NO. 1-867-882-11
HDCU1000_HIF-25_011_1

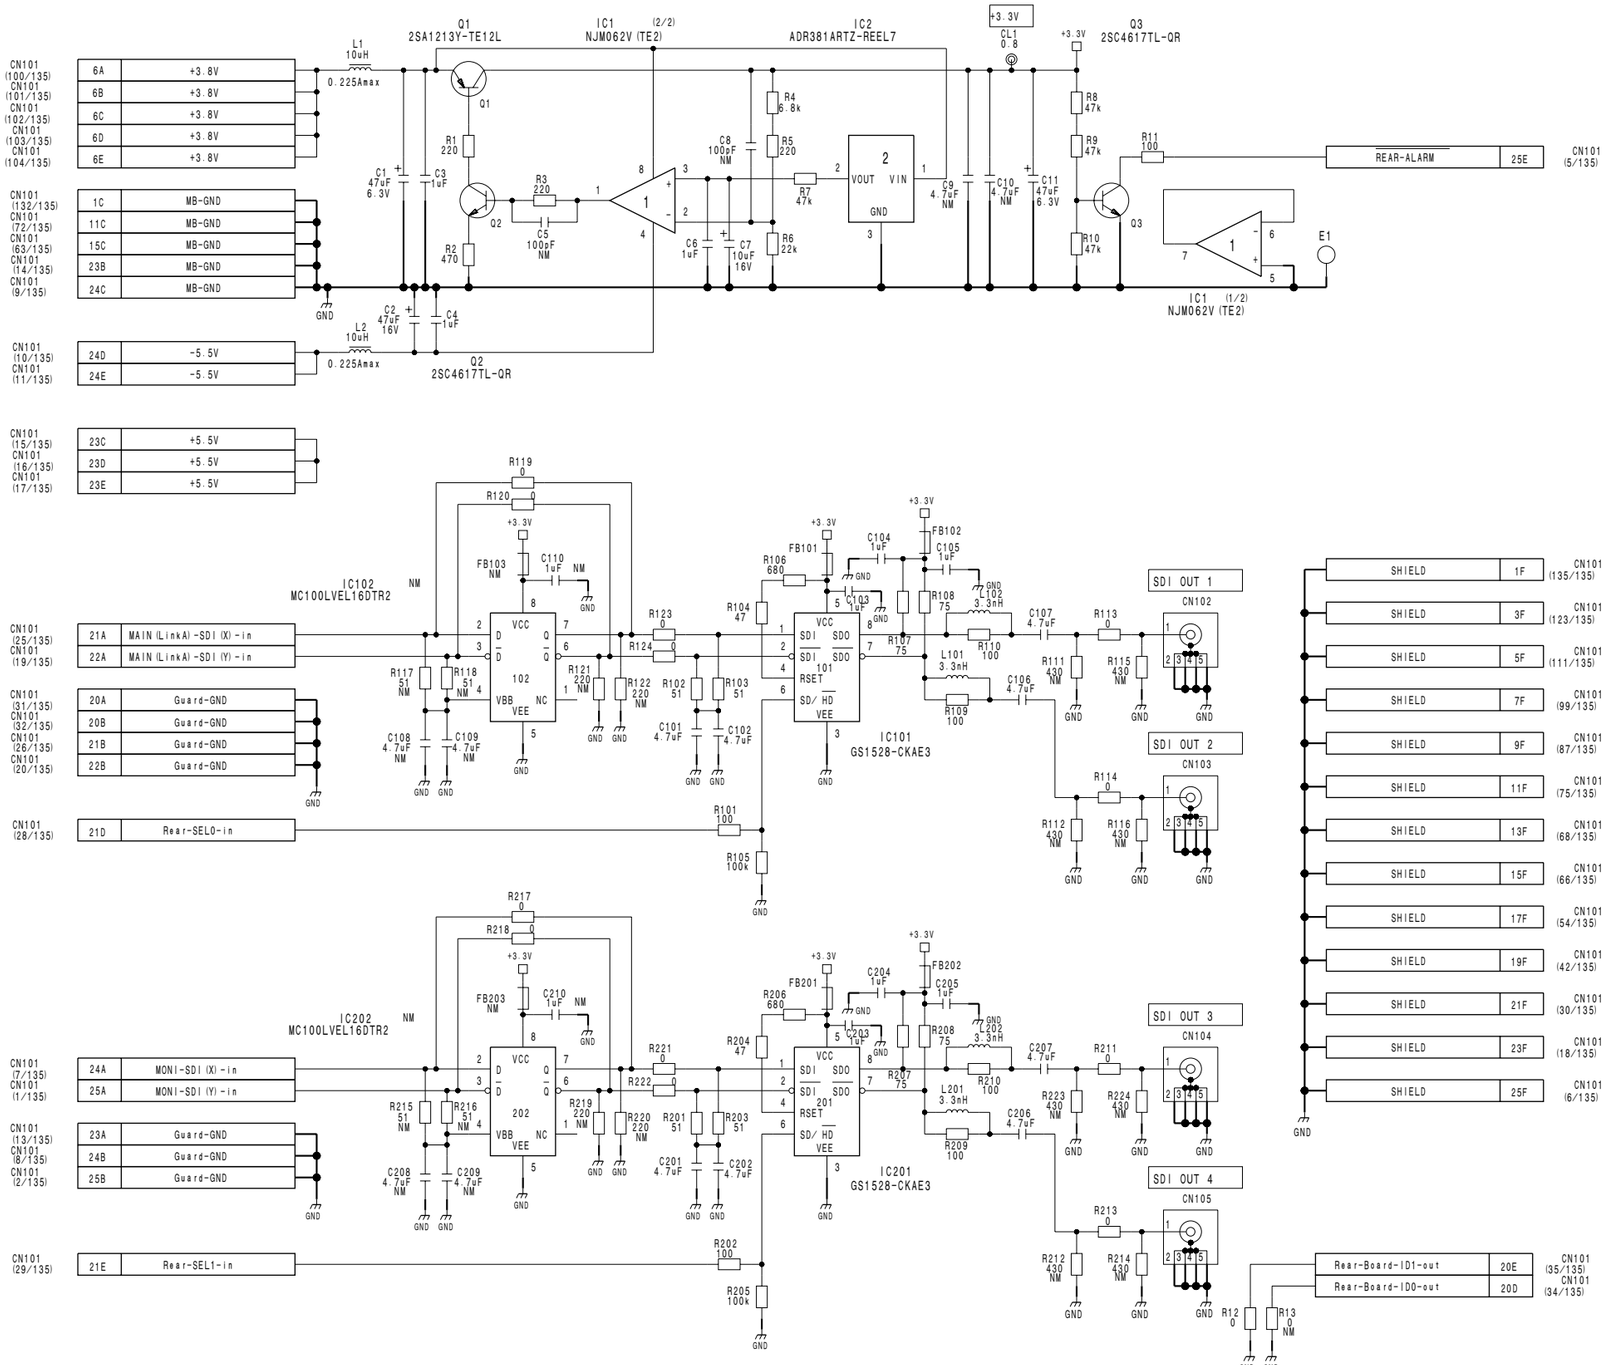
Q1 2SA1213Y-TE12L
IC1 NJM062V (TE2) (2/2)
IC2 ADR381ARTZ-REEL7
Q3 2SC4617TL-QR
Q2 2SC4617TL-QR
IC1 NJM062V (TE2) (1/2)
IC102 MC100LVEL16DTR2
IC101 GS1528-CKAE3
IC202 MC100LVEL16DTR2
IC201 GS1528-CKAE3
SDI OUT 1
SDI OUT 2
SDI OUT 3
SDI OUT 4
CN101 (100/135) 6A +3.8V
CN101 (101/135) 6B +3.8V
CN101 (102/135) 6C +3.8V
CN101 (103/135) 6D +3.8V
CN101 (104/135) 6E +3.8V
CN101 (132/135) 1C MB-GND
CN101 (72/135) 11C MB-GND
CN101 (63/135) 15C MB-GND
CN101 (14/135) 23B MB-GND
CN101 (9/135) 24C MB-GND
CN101 (10/135) 24D -5.5V
CN101 (11/135) 24E -5.5V
CN101 (15/135) 23C +5.5V
CN101 (16/135) 23D +5.5V
CN101 (17/135) 23E +5.5V
CN101 (25/135) 21A MAIN(LinkA)-SDI(X)-in
CN101 (19/135) 22A MAIN(LinkA)-SDI(Y)-in
CN101 (31/135) 20A Guard-GND
CN101 (32/135) 20B Guard-GND
CN101 (26/135) 21B Guard-GND
CN101 (20/135) 22B Guard-GND
CN101 (28/135) 21D Rear-SEL0-in
CN101 (7/135) 24A MONI-SDI(X)-in
CN101 (1/135) 25A MONI-SDI(Y)-in
CN101 (13/135) 23A Guard-GND
CN101 (8/135) 24B Guard-GND
CN101 (2/135) 25B Guard-GND
CN101 (29/135) 21E Rear-SEL1-in
REAR-ALARM 25E CN101 (5/135)
SHIELD 1F CN101 (135/135)
SHIELD 3F CN101 (123/135)
SHIELD 5F CN101 (111/135)
SHIELD 7F CN101 (99/135)
SHIELD 9F CN101 (87/135)
SHIELD 11F CN101 (75/135)
SHIELD 13F CN101 (68/135)
SHIELD 15F CN101 (66/135)
SHIELD 17F CN101 (54/135)
SHIELD 19F CN101 (42/135)
SHIELD 21F CN101 (30/135)
SHIELD 23F CN101 (18/135)
SHIELD 25F CN101 (6/135)
Rear-Board-ID1-out 20E CN101 (35/135)
Rear-Board-ID0-out 20D CN101 (34/135)
SDT-74M-CLK-out 15A CN101 (61/135)
OE-in 15B CN101 (62/135)
SKIN-Gate-out 15D CN101 (64/135)
SDTD-HD/SD-F-out 15E CN101 (65/135)
HD-LinkA-Y0-out 16A CN101 (55/135)
HD-LinkA-Y1-out 16B CN101 (56/135)
HD-LinkA-Y2-out 16C CN101 (57/135)
HD-LinkA-Y3-out 16D CN101 (58/135)
HD-LinkA-Y4-out 16E CN101 (59/135)
HD-LinkA-Y5-out 17A CN101 (49/135)
HD-LinkA-Y6-out 17B CN101 (50/135)
HD-LinkA-Y7-out 17C CN101 (51/135)
HD-LinkA-Y8-out 17D CN101 (52/135)
HD-LinkA-Y9-out 17E CN101 (53/135)
HD-LinkA-C0-out 18A CN101 (43/135)
HD-LinkA-C1-out 18B CN101 (44/135)
HD-LinkA-C2-out 18C CN101 (45/135)
HD-LinkA-C3-out 18D CN101 (46/135)
HD-LinkA-C4-out 18E CN101 (47/135)
HD-LinkA-C5-out 19A CN101 (37/135)
HD-LinkA-C6-out 19B CN101 (38/135)
HD-LinkA-C7-out 19C CN101 (39/135)
HD-LinkA-C8-out 19D CN101 (40/135)
HD-LinkA-C9-out 19E CN101 (41/135)
RM-PIX-S(G)-out 20C CN101 (33/135)
RM-PIX-S(X)-out 22C CN101 (27/135)
CCU-Ref-F-in 22D CN101 (21/135)
External-Ref-SYNC-in 22E CN101 (22/135)
nc 25C CN101 (23/135)
nc 25D CN101 (3/135)
CN101 (4/135)
CHU-74M-CLK-in 1A CN101 (130/135)
OE-out 1B CN101 (131/135)
CCD-F-acm-in 1D CN101 (133/135)
CHU-LinkA-F-in 1E CN101 (134/135)
CHU-LinkA-Y0-in 2A CN101 (124/135)
CHU-LinkA-Y1-in 2B CN101 (125/135)
CHU-LinkA-Y2-in 2C CN101 (126/135)
CHU-LinkA-Y3-in 2D CN101 (127/135)
CHU-LinkA-Y4-in 2E CN101 (128/135)
CHU-LinkA-Y5-in 3A CN101 (118/135)
CHU-LinkA-Y6-in 3B CN101 (119/135)
CHU-LinkA-Y7-in 3C CN101 (120/135)
CHU-LinkA-Y8-in 3D CN101 (121/135)
CHU-LinkA-Y9-in 3E CN101 (122/135)
CHU-LinkA-C0-in 4A CN101 (112/135)
CHU-LinkA-C1-in 4B CN101 (113/135)
CHU-LinkA-C2-in 4C CN101 (114/135)
CHU-LinkA-C3-in 4D CN101 (115/135)
CHU-LinkA-C4-in 4E CN101 (116/135)
CHU-LinkA-C5-in 5A CN101 (106/135)
CHU-LinkA-C6-in 5B CN101 (107/135)
CHU-LinkA-C7-in 5C CN101 (108/135)
CHU-LinkA-C8-in 5D CN101 (109/135)
CHU-LinkA-C9-in 5E CN101 (110/135)
7A CN101 (94/135)
7B CN101 (95/135)
7C CN101 (96/135)
7D CN101 (97/135)
7E CN101 (98/135)
8A CN101 (88/135)
8B CN101 (89/135)
8C CN101 (90/135)
8D CN101 (91/135)
8E CN101 (92/135)
9A CN101 (82/135)
9B CN101 (83/135)
9C CN101 (84/135)
9D CN101 (85/135)
9E CN101 (86/135)
10A CN101 (76/135)
10B CN101 (77/135)
10C CN101 (78/135)
10D CN101 (79/135)
10E CN101 (80/135)
MST-74M-CLK-B-in 11A CN101 (70/135)
OE-out 11B CN101 (71/135)
MST-HD-H-B-in 11D CN101 (73/135)
MST-HD-F-B-in 11E CN101 (74/135)
144 2F CN101 (129/135)
132 4F CN101 (117/135)
120 6F CN101 (105/135)
108 8F CN101 (93/135)
96 10F CN101 (81/135)
84 12F CN101 (69/135)
72 14F CN101 (67/135)
60 16F CN101 (60/135)
48 18F CN101 (48/135)
36 20F CN101 (36/135)
24 22F CN101 (24/135)
12 24F CN101 (12/135)
+3.8V +5.5V -5.5V +3.3V GND MB-GND Guard-GND
L1 10uH 0.225Amax
L2 10uH 0.225Amax
CL1 0.8
R1 220
R2 470
R3 220
R4 6.8k
R5 220
R6 22k
R7 47k
R8 47k
R9 47k
R10 47k
R11 100
C1 47uF 6.3V
C2 47uF 16V
C3 1uF
C4 1uF
C5 100pF NM
C6 1uF
C7 10uF 16V
C8 100pF NM
C9 4.7uF NM
C10 4.7uF NM
C11 47uF 6.3V
R101 100
R105 100k
R202 100
R205 100k
R119 0
R120 0
R217 0
R218 0
C110 1uF NM
C210 1uF NM
FB101 FB102 FB103 FB201 FB202 FB203
C104 1uF
C105 1uF
C204 1uF
C205 1uF
C103 1uF
C203 1uF
R106 680
R206 680
R107 75
R207 75
R108 75
R208 75
L101 3.3nH
L102 3.3nH
L201 3.3nH
L202 3.3nH
R109 100
R110 100
R209 100
R210 100
C106 4.7uF
C107 4.7uF
C206 4.7uF
C207 4.7uF
R111 430 NM
R112 430 NM
R113 0
R114 0
R115 430 NM
R116 430 NM
R211 0
R212 430 NM
R213 0
R214 430 NM
R223 430 NM
R224 430 NM
R104 47
R204 47
R123 0
R124 0
R221 0
R222 0
R102 51
R103 51
R201 51
R203 51
R117 51 NM
R118 51 NM
R215 51 NM
R216 51 NM
R121 220 NM
R122 220 NM
R219 220 NM
R220 220 NM
C101 4.7uF
C102 4.7uF
C201 4.7uF
C202 4.7uF
C108 4.7uF NM
C109 4.7uF NM
C208 4.7uF NM
C209 4.7uF NM
R12 0
R13 0 NM
E1
CN102
CN103
CN104
CN105

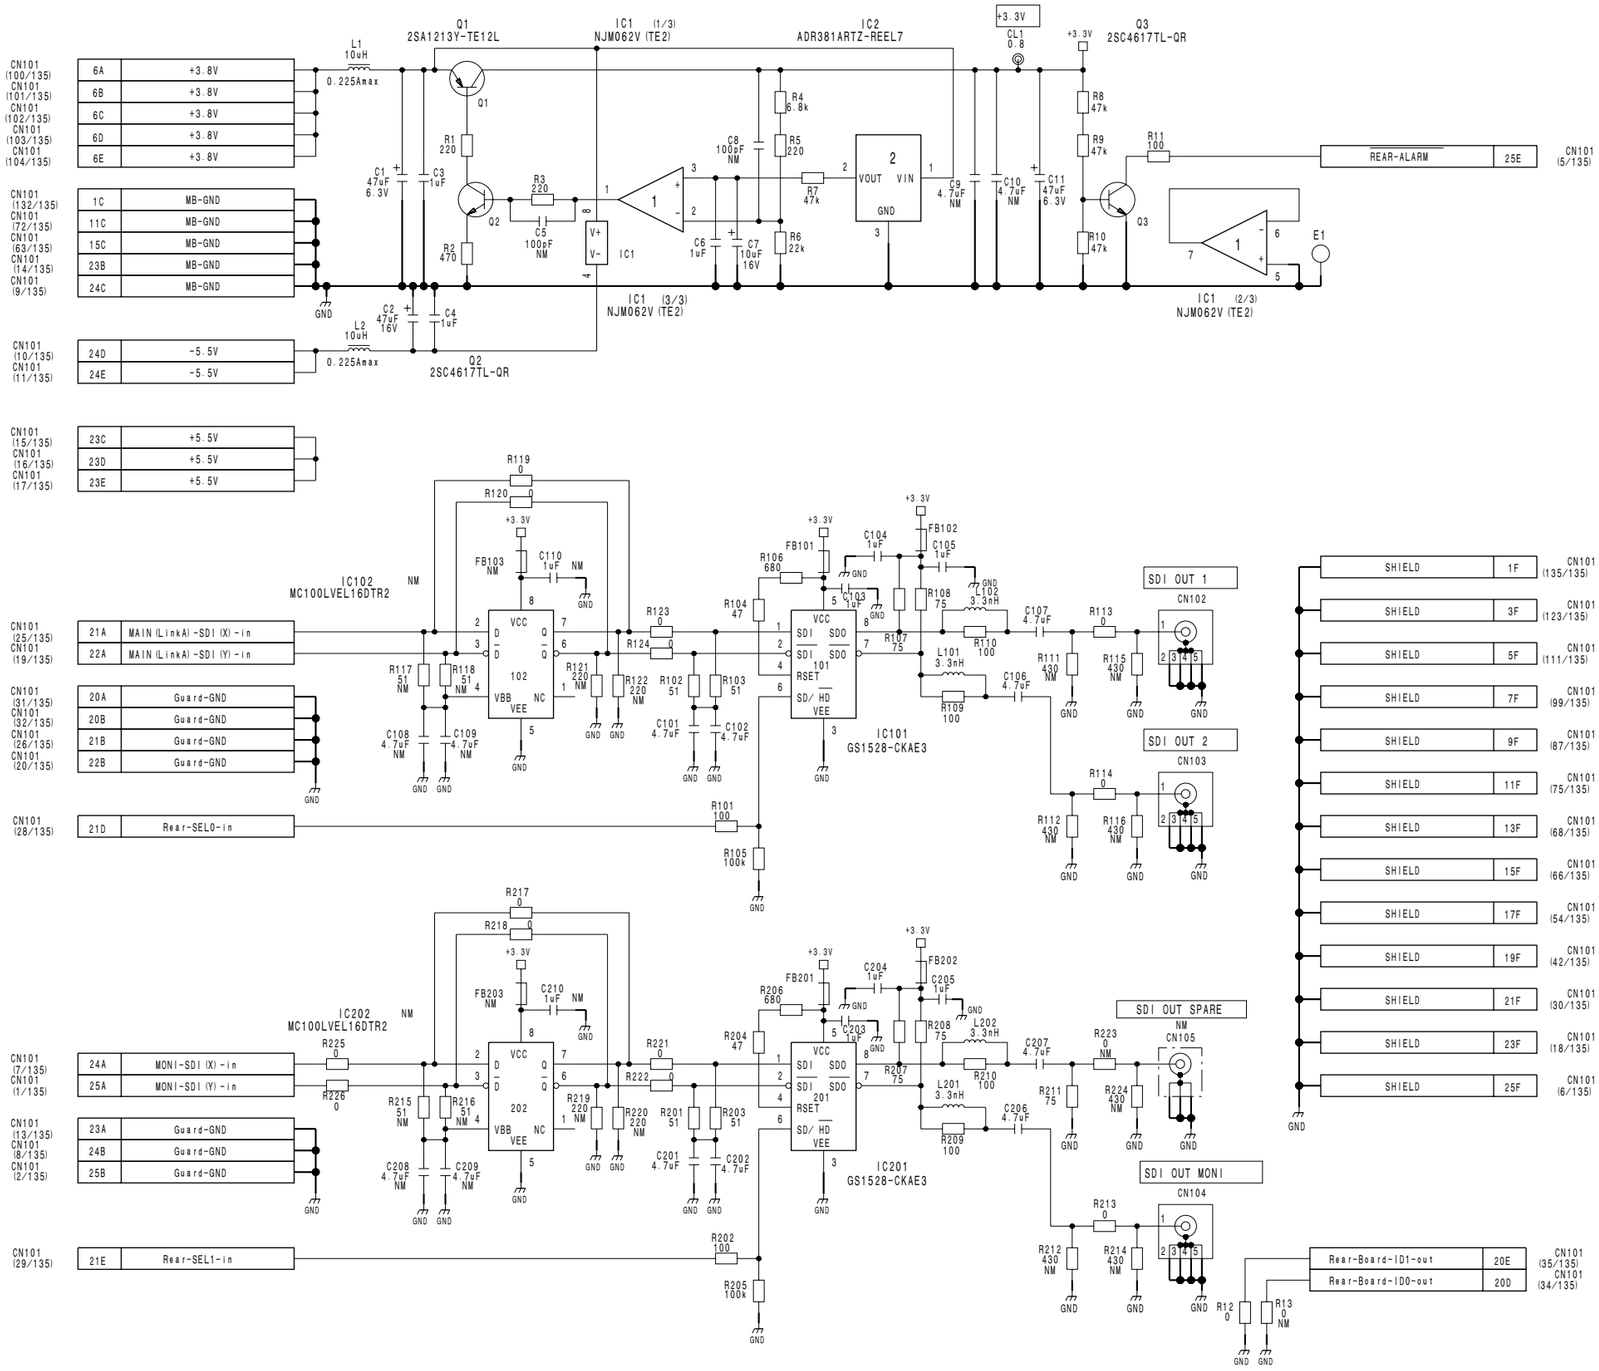


**HIF-27**
BOARD NO. 1-867-893-11
HDCU1500_HIF-27_011_1

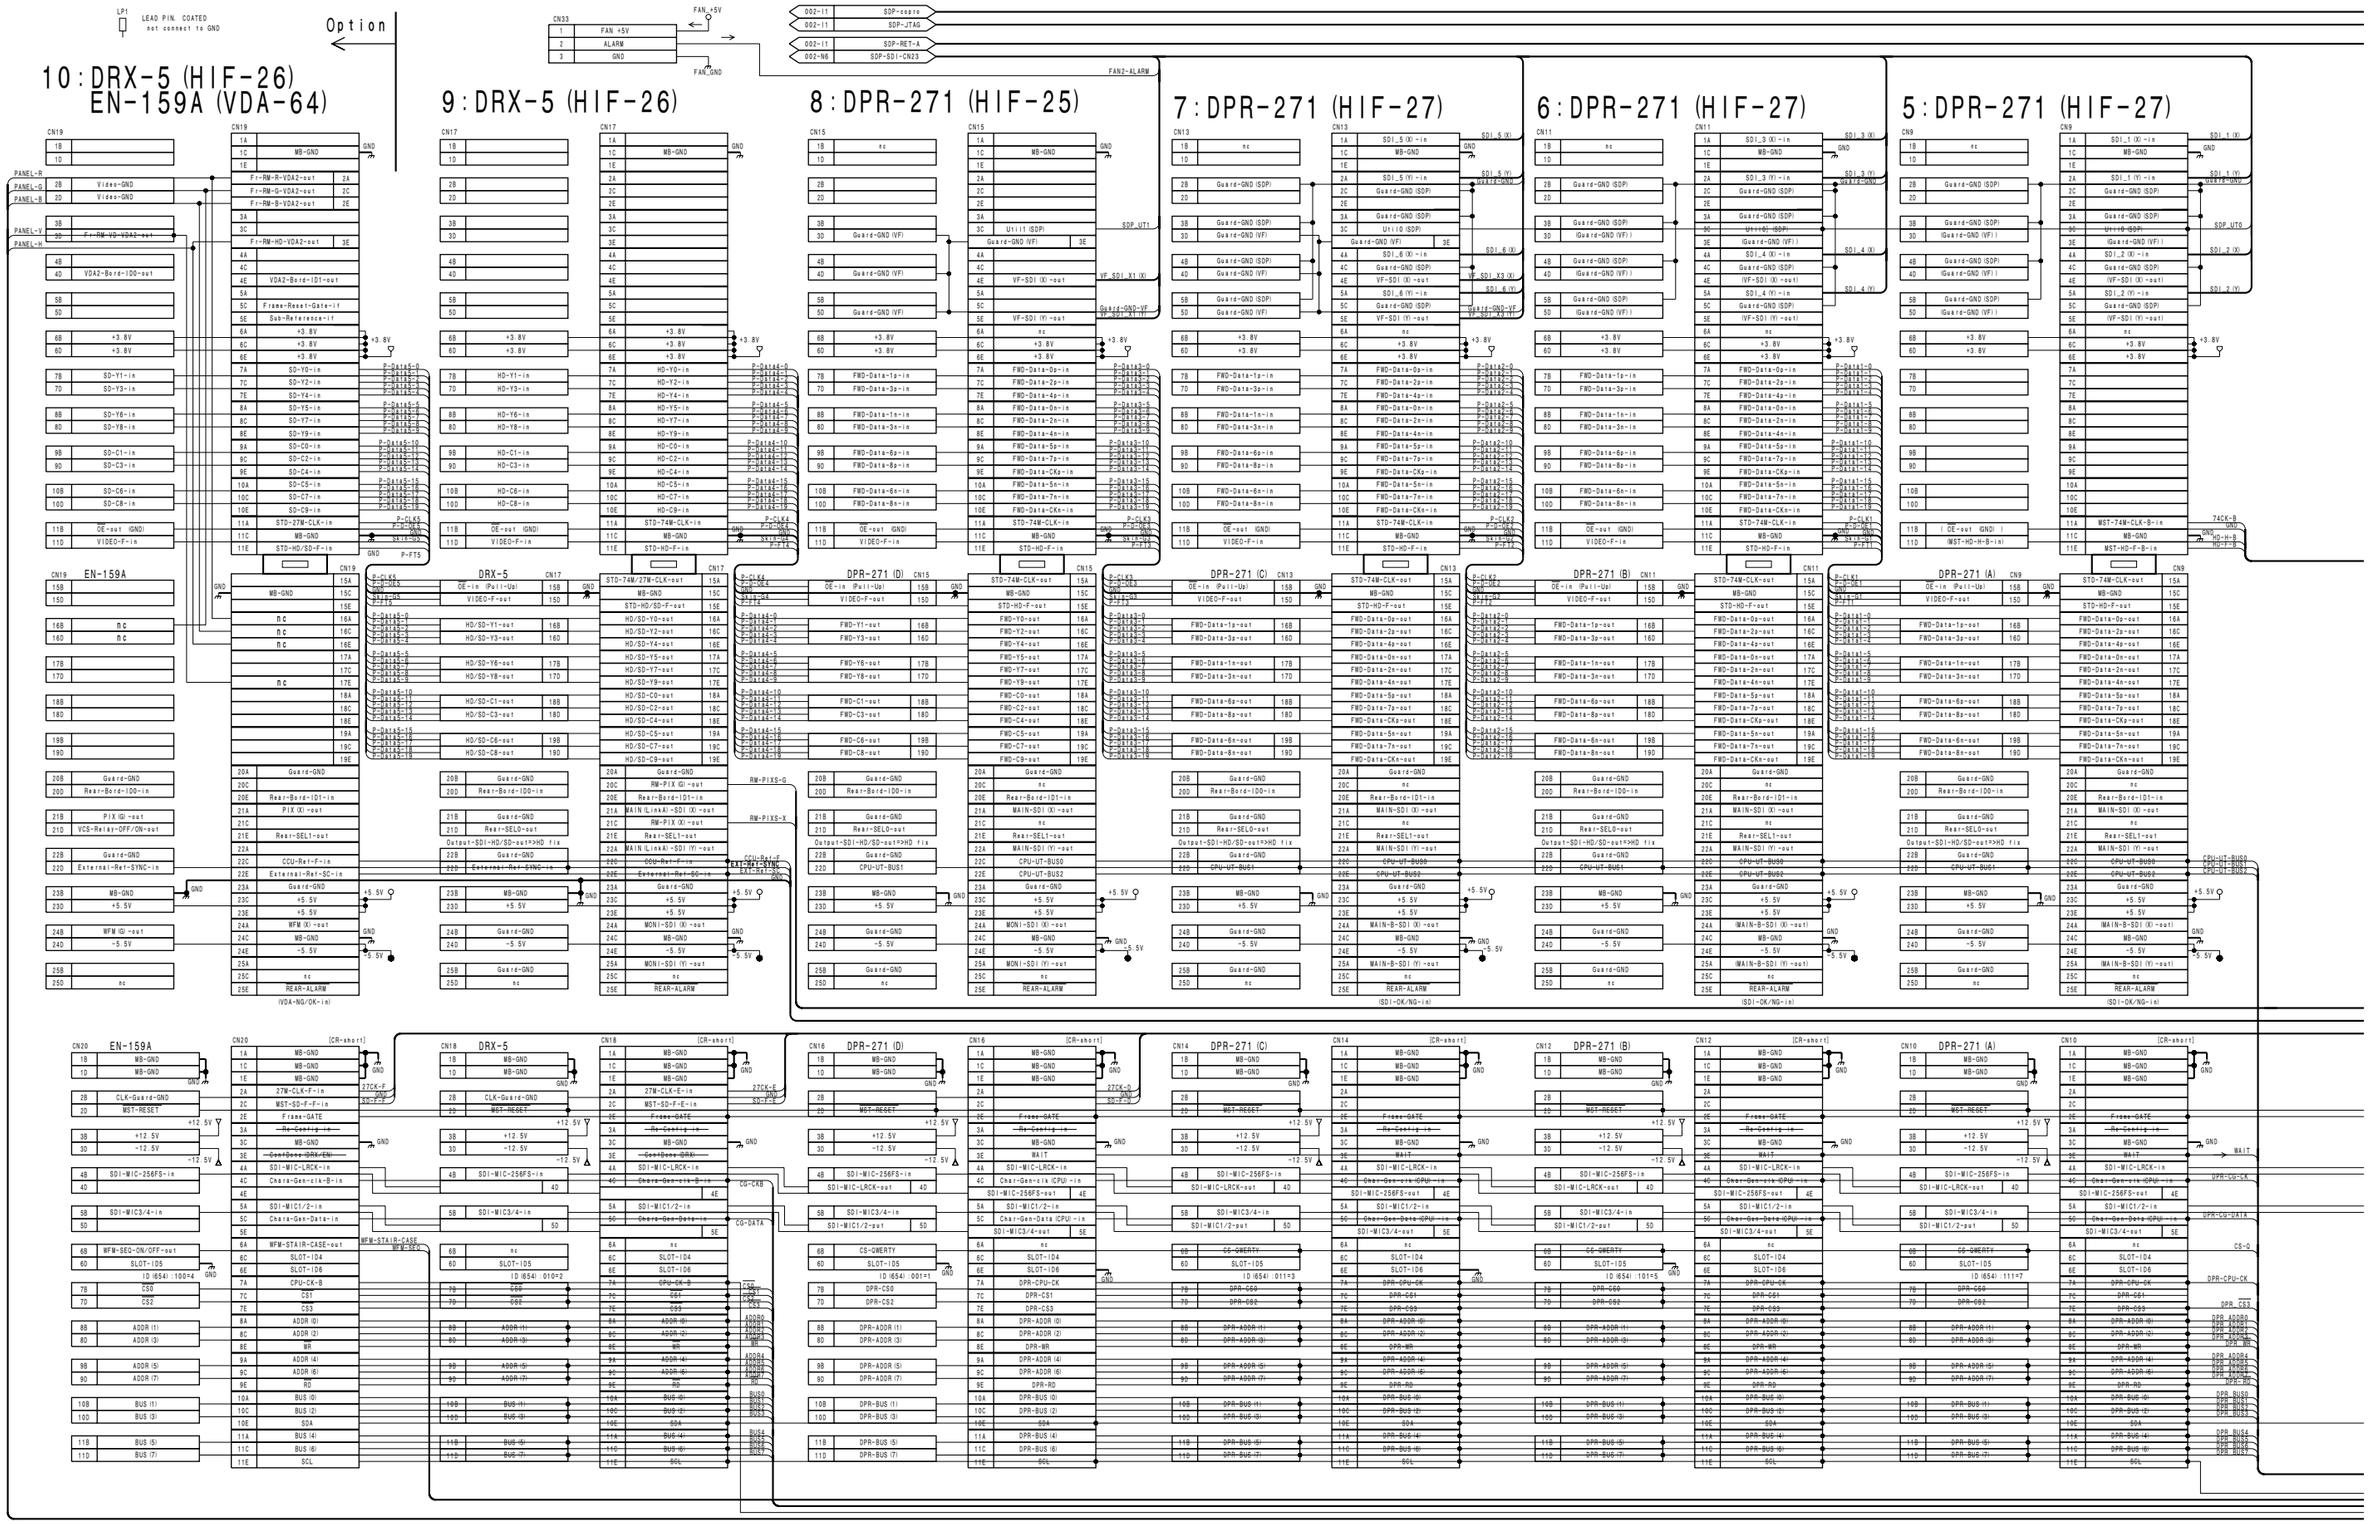
Option
LP1 LEAD P.N. COATED not connect to GND
CN33 FAN +5V ALARM GND FAN_+5V FAN_GND
002-11 SDP-copro
002-11 SDP-JTAG
002-11 SDP-RET-A
002-N6 SDP-SDI-CN23
10 : DRX-5 (HIF-26) EN-159A (VDA-64)
9 : DRX-5 (HIF-26)
8 : DPR-271 (HIF-25)
7 : DPR-271 (HIF-27)
6 : DPR-271 (HIF-27)
5 : DPR-271 (HIF-27)
FAN2-ALARM
SDP_UT1
VF_SDI_X1 (X)
Guard-GND-VF
VF_SDI_X1 (Y)
SDP_UT0
SDI_1 (X)
SDI_1 (Y)
SDI_2 (X)
SDI_2 (Y)
SDI_3 (X)
SDI_3 (Y)
SDI_4 (X)
SDI_4 (Y)
SDI_5 (X)
SDI_5 (Y)
SDI_6 (X)
SDI_6 (Y)
PANEL-R
PANEL-G
PANEL-B
PANEL-V
PANEL-H
Video-GND
Fr-RM-R-VDA2-out
Fr-RM-G-VDA2-out
Fr-RM-B-VDA2-out
Fr-RM-V0-VDA2-out
Fr-RM-HD-VDA2-out
VDA2-Bord-IDD-out
Frame-Reset-Gate-if
Sub-Reference-if
+3.8V
SD-Y0-in
SD-Y1-in
SD-Y2-in
SD-Y3-in
SD-Y4-in
SD-Y5-in
SD-Y6-in
SD-Y7-in
SD-Y8-in
SD-Y9-in
SD-C0-in
SD-C1-in
SD-C2-in
SD-C3-in
SD-C4-in
SD-C5-in
SD-C6-in
SD-C7-in
SD-C8-in
SD-C9-in
STD-27M-CLK-in
VIDEO-F-in
STD-HD/SD-F-in
MB-GND
EN-159A
DRX-5
DPR-271 (D)
DPR-271 (C)
DPR-271 (B)
DPR-271 (A)
OE-in (Pull-Up)
VIDEO-F-out
nc
HD/SD-Y1-out
HD/SD-Y3-out
HD/SD-Y6-out
HD/SD-Y8-out
HD/SD-C1-out
HD/SD-C3-out
HD/SD-C6-out
HD/SD-C8-out
Guard-GND
Rear-Bord-IDD-in
Rear-Bord-IDI-in
PIX (G) -out
VCS-Relay-OFF/ON-out
Rear-SEL1-out
Output-SDI-HD/SD-out*HD fix
CCU-Ref-F-in
External-Ref-SYNC-in
External-Ref-SC-in
MB-GND
+5.5V
WFM (X) -out
WFM (G) -out
-5.5V
REAR-ALARM
(VDA-NG/OK-in)
(SDI-OK/NG-in)
RM-PIXS-G
RM-PIXS-X
EXT-Ref-SYNC
CCU-Ref-F
EXT-Ref-SC
MAIN (LinkA) -SDI (X) -out
MAIN (LinkA) -SDI (Y) -out
MAIN-SDI (X) -out
MAIN-SDI (Y) -out
MAIN-B-SDI (X) -out
MAIN-B-SDI (Y) -out
CPU-UT-BUS0
CPU-UT-BUS1
CPU-UT-BUS2
MONI-SDI (X) -out
MONI-SDI (Y) -out
Rear-SEL0-out
Rear-SEL1-out
Rear-SEL-out
Output-SDI-HD/SD-out*HD fix
CPU-UT-BUS1
Guard-GND (VF)
Guard-GND (SDP)
Util (SDP)
VF-SDI (X) -out
VF-SDI (Y) -out
nc
FWD-Data-0n-in
FWD-Data-1n-in
FWD-Data-2n-in
FWD-Data-3n-in
FWD-Data-4n-in
FWD-Data-5n-in
FWD-Data-6n-in
FWD-Data-7n-in
FWD-Data-8n-in
FWD-Data-9n-in
FWD-Data-Zn-in
FWD-Data-An-in
FWD-Data-Bn-in
FWD-Data-Cn-in
FWD-Data-Dn-in
FWD-Data-En-in
FWD-Data-CKn-in
STD-74M-CLK-in
STD-74M-CLK-out
STD-HD-F-in
STD-HD-F-out
FWD-Y0-out
FWD-Y1-out
FWD-Y2-out
FWD-Y3-out
FWD-Y4-out
FWD-Y5-out
FWD-Y6-out
FWD-Y7-out
FWD-Y8-out
FWD-Y9-out
FWD-C0-out
FWD-C1-out
FWD-C2-out
FWD-C3-out
FWD-C4-out
FWD-C5-out
FWD-C6-out
FWD-C7-out
FWD-C8-out
FWD-C9-out
MST-74M-CLK-B-in
MST-HD-H-B-in
74CK-B
HD-H-B
WFM-STAIR-CASE
WFM-SEQ
SLOT-ID4
SLOT-ID5
ID (654) : 100=4
SLOT-ID6
CPU-CK-B
CS0
CS1
CS2
CS3
ADDR (0)
ADDR (1)
ADDR (2)
ADDR (3)
ADDR (4)
ADDR (5)
ADDR (6)
ADDR (7)
WR
RD
BUS (0)
BUS (1)
BUS (2)
BUS (3)
BUS (4)
BUS (5)
BUS (6)
BUS (7)
SDA
SCL
CN19
CN17
CN15
CN13
CN11
CN9
CN20
CN18
CN16
CN14
CN12
CN10
(CR-short)
CG-CKB
CG-DATA
CS-CWERTY
CS-Q
DPR-CPU-CK
DPR-CS0
DPR-CS1
DPR-CS2
DPR-CS3
DPR-ADDR0
DPR-ADDR1
DPR-ADDR2
DPR-ADDR3
DPR-WR
DPR-ADDR4
DPR-ADDR5
DPR-ADDR6
DPR-ADDR7
DPR-RD
DPR-BUS0
DPR-BUS1
DPR-BUS2
DPR-BUS3
DPR-BUS4
DPR-BUS5
DPR-BUS6
DPR-BUS7
WAIT
DPR-CG-CK
DPR-CG-DATA

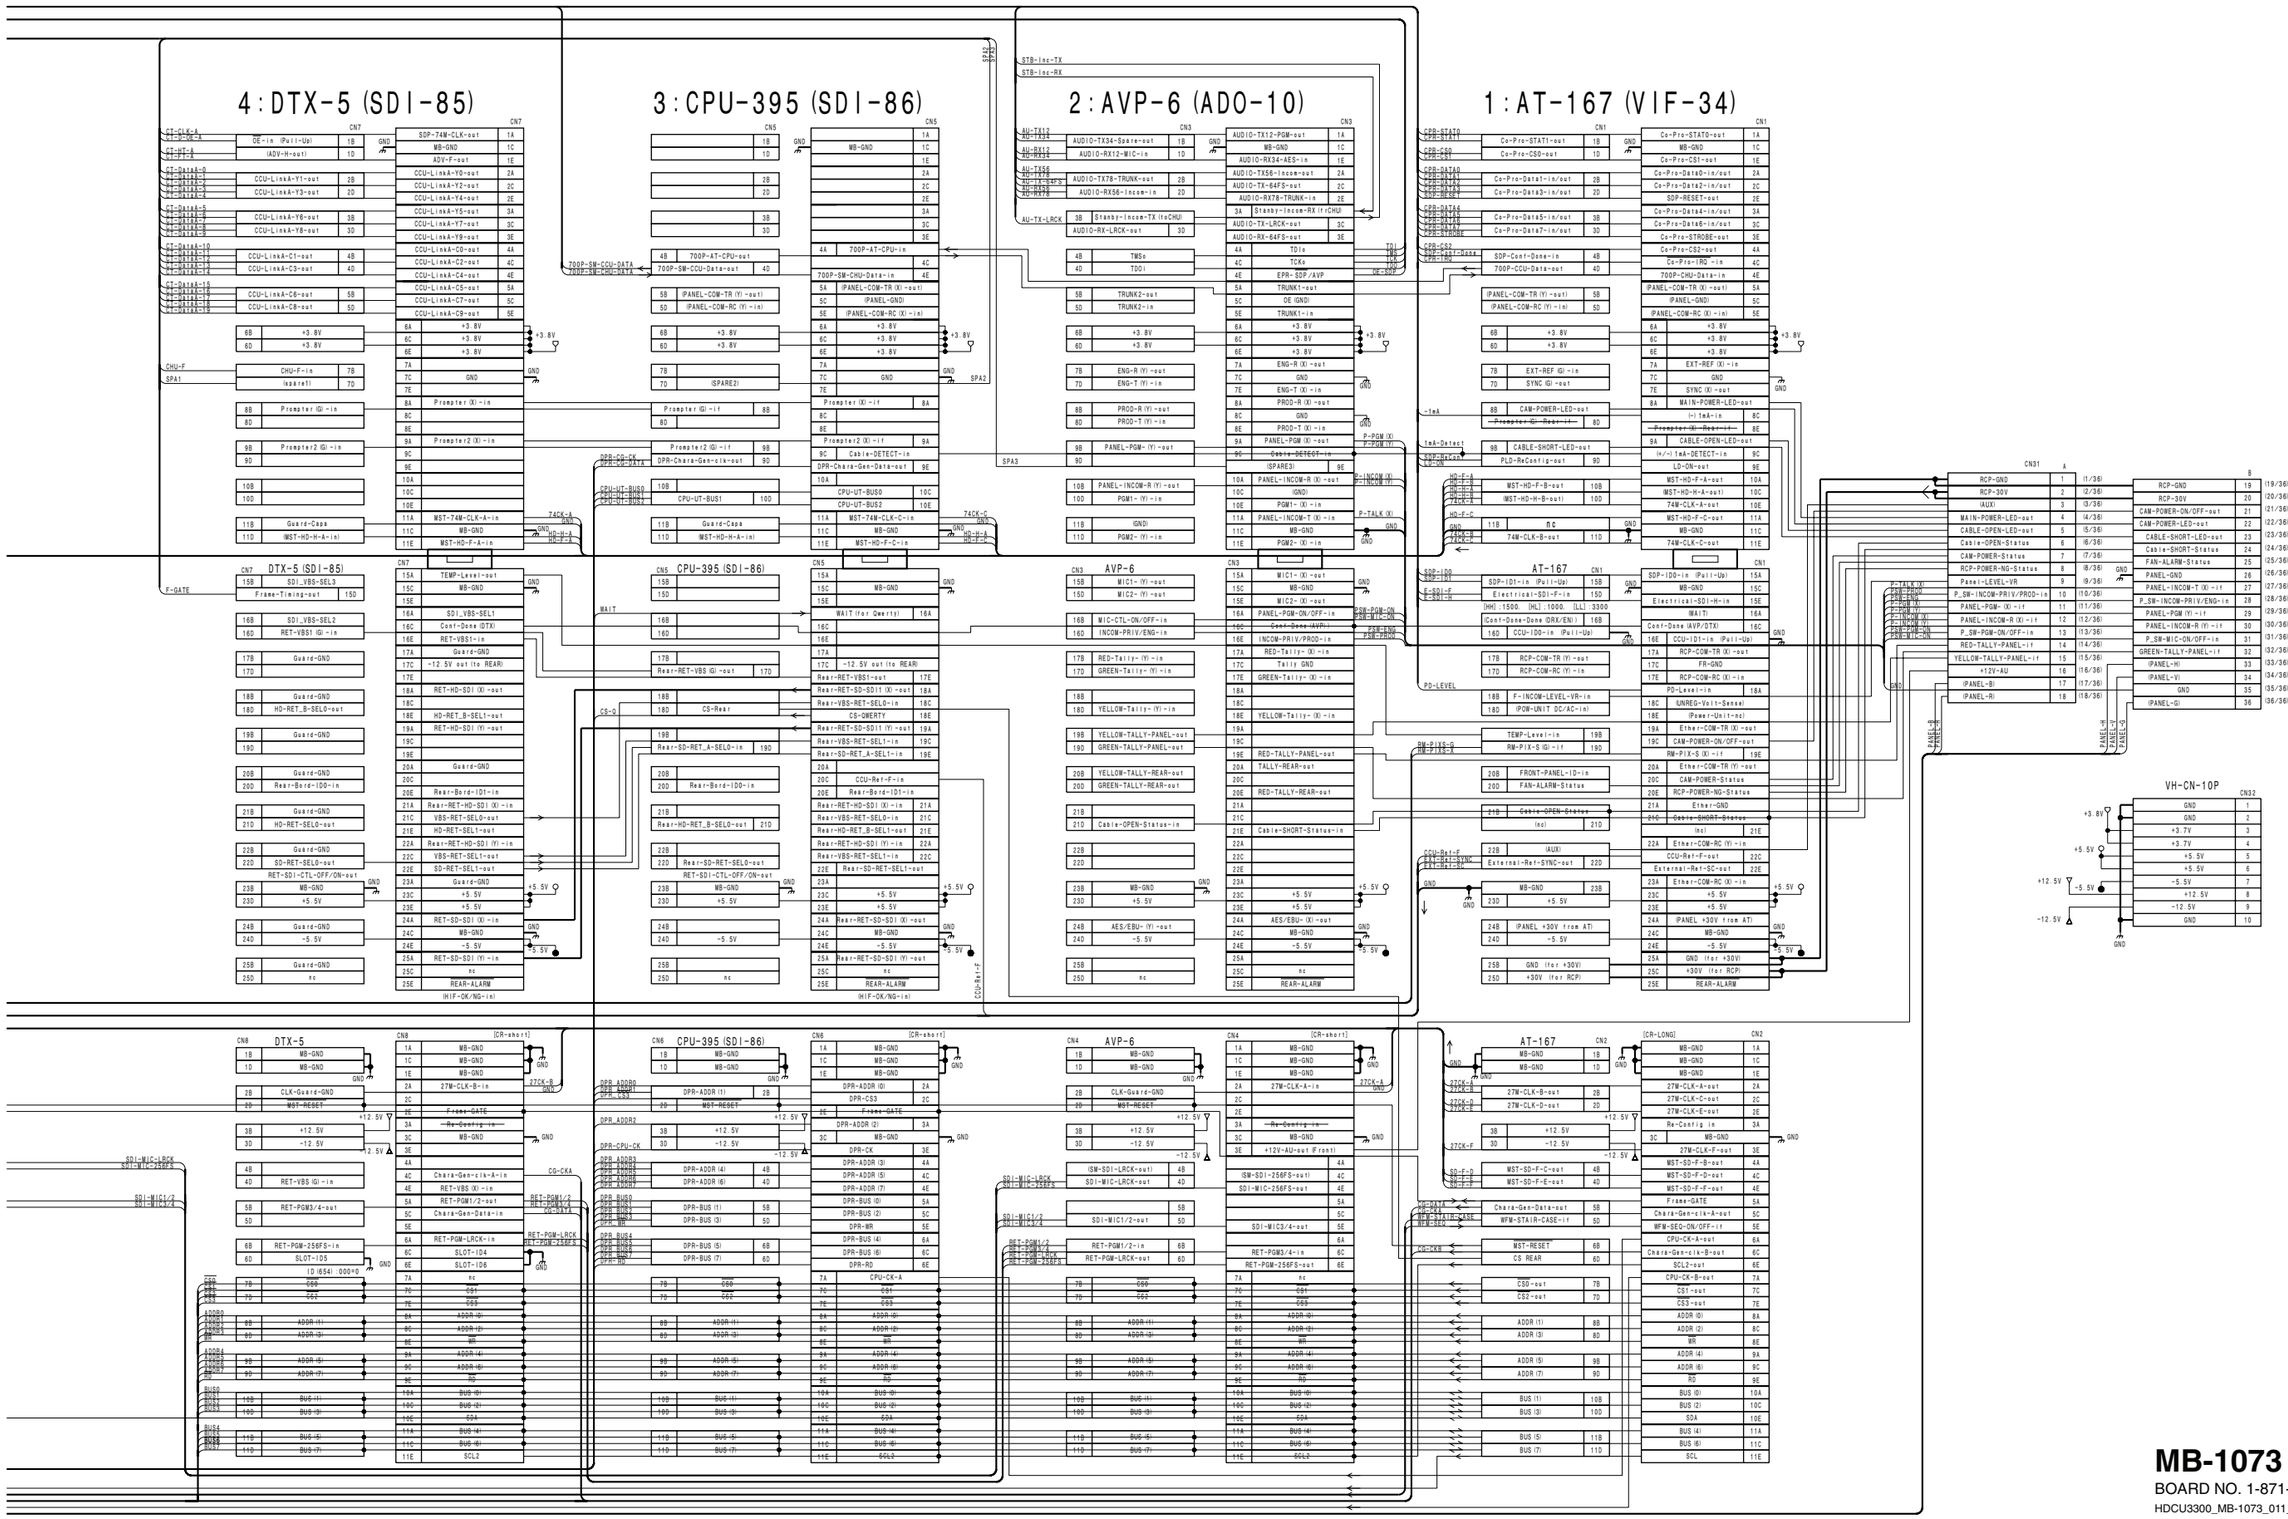




**MB-1073 (1/3)**
BOARD NO. 1-871-677-11
HDCU3300_MB-1073_011_1

MB-1073 (2/3)
SUFFIX: -11

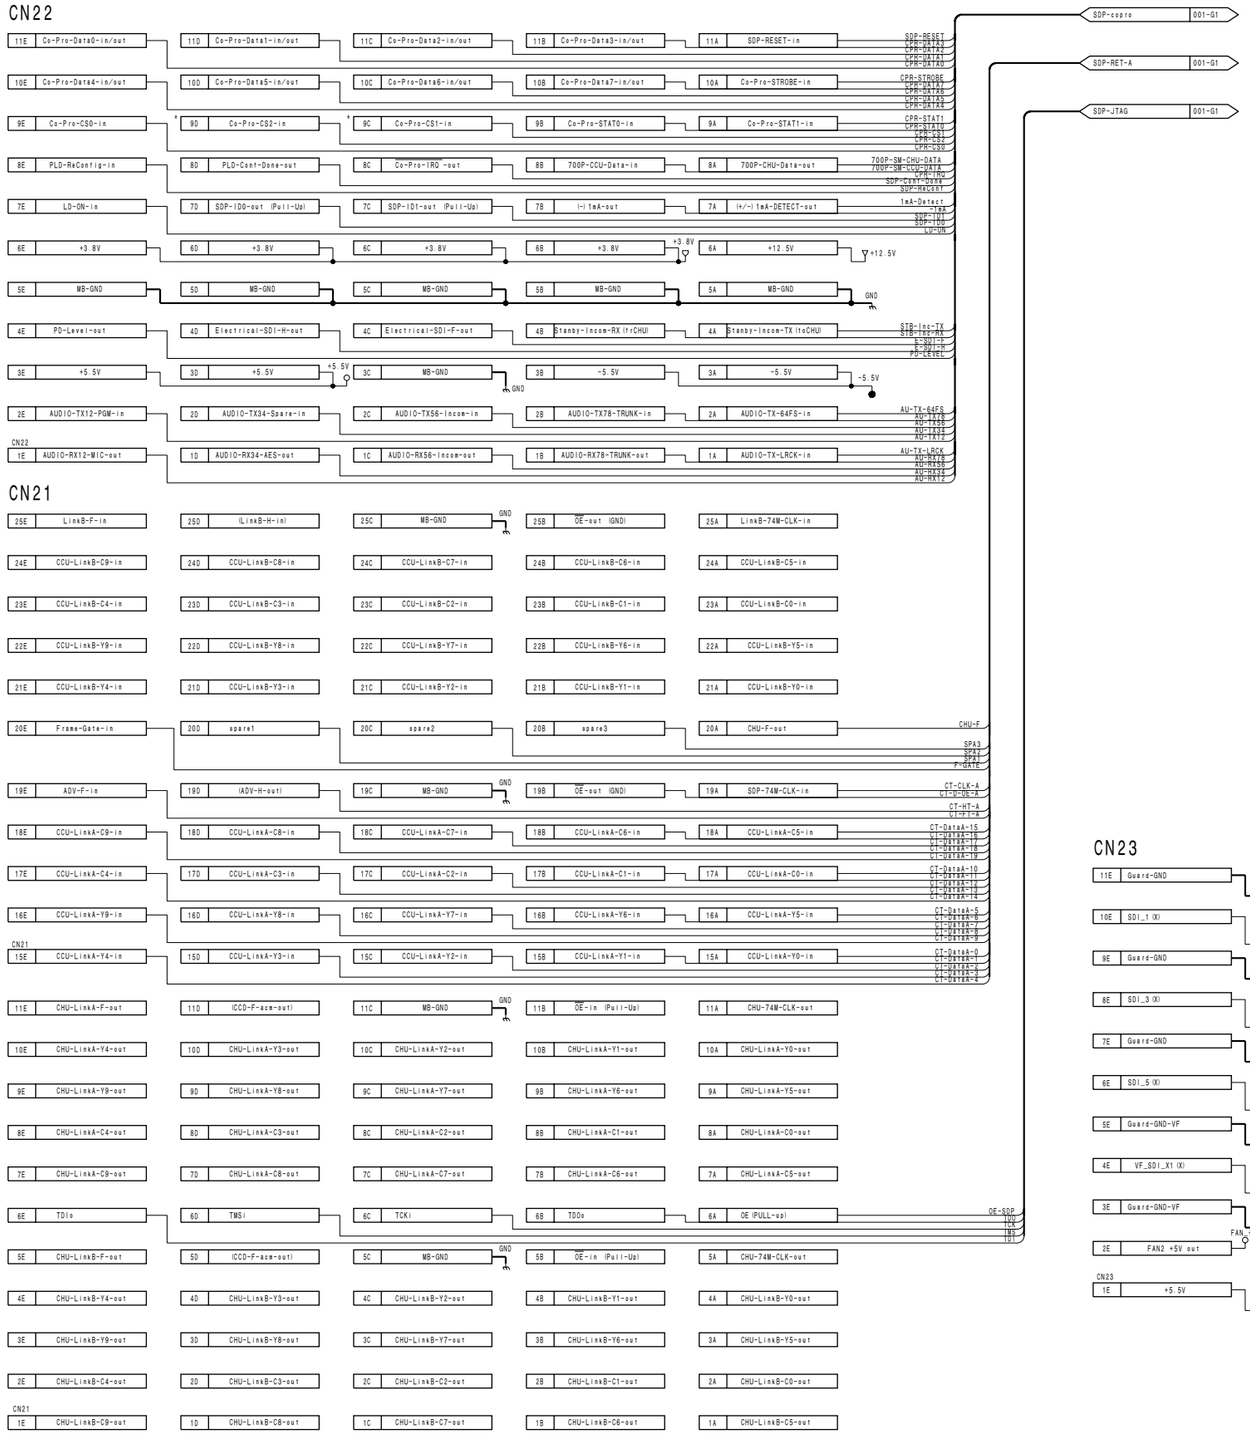


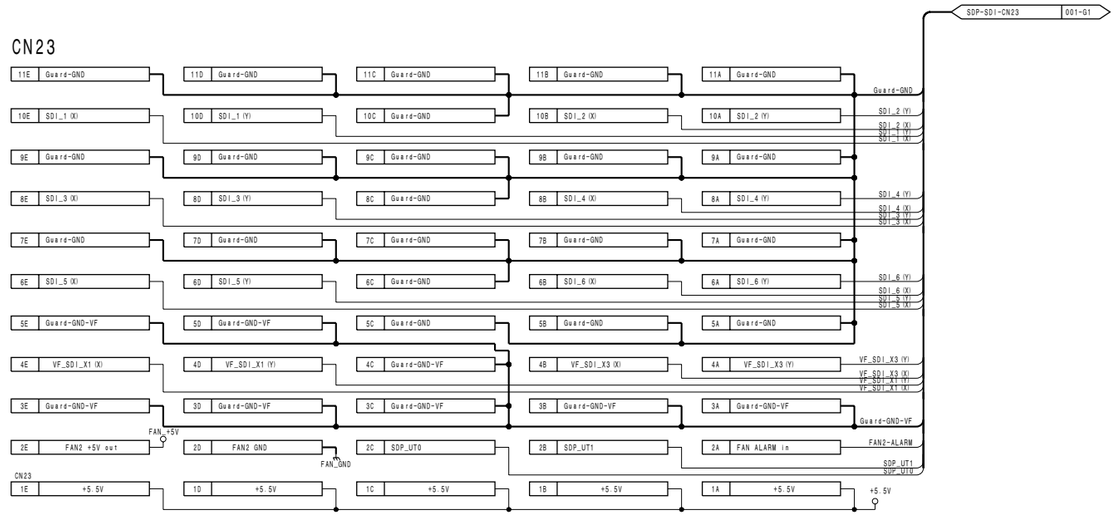


**MB-1073 (2/3)**
BOARD NO. 1-871-677-11
HDCU3300_MB-1073_011_2

# MB-1073 (3/3)
SUFFIX: -11

# MB-1073 (3/3)
SUFFIX: -11

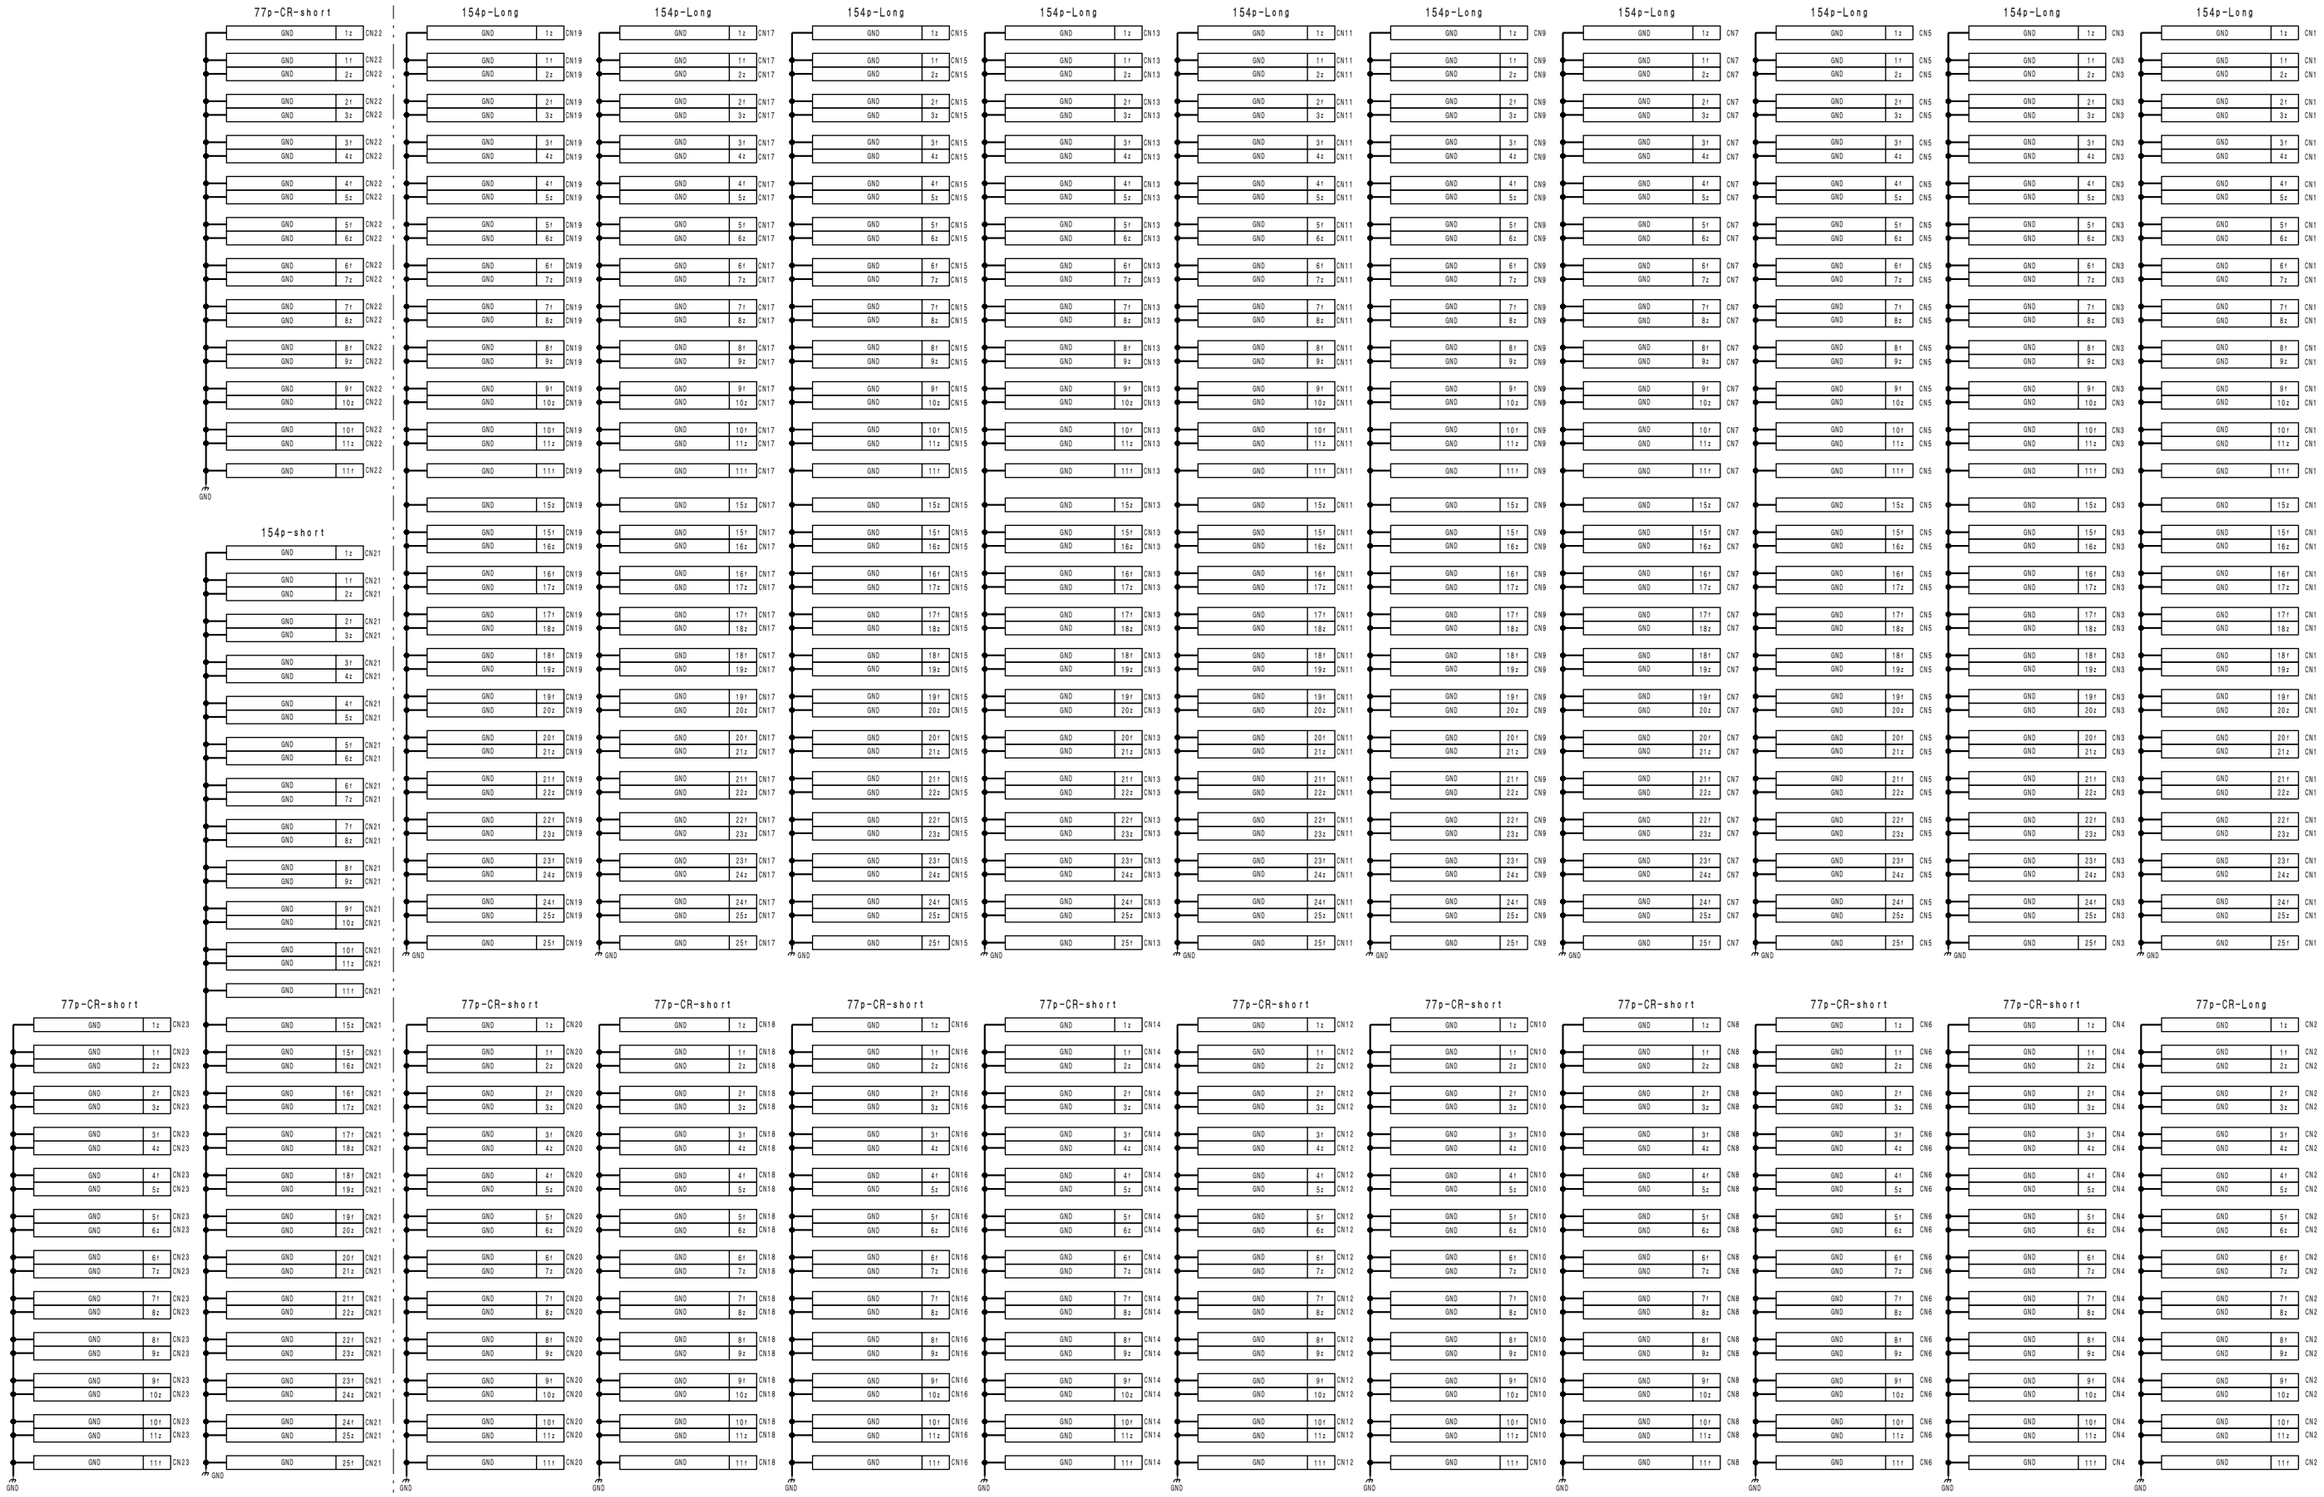


# MB-1073 (3/3)
BOARD NO. 1-871-677-11
HDCU3300_MB-1073_011_3

# OTR-1 (1/12)
**SUFFIX: -11**

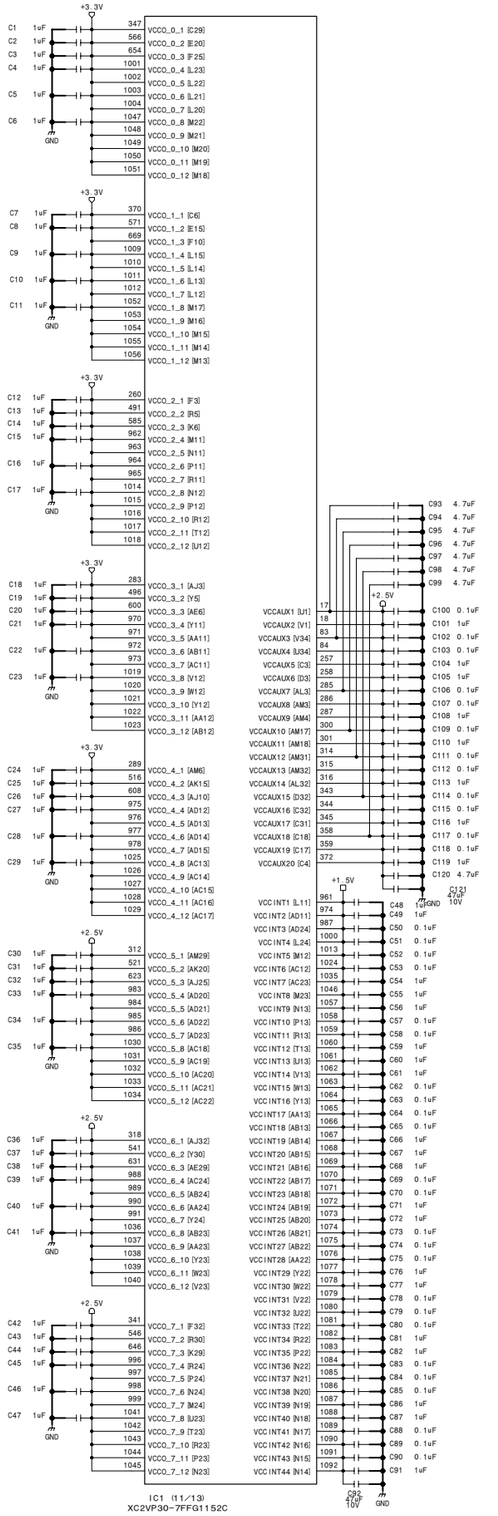




OTR-1 (1/12)
SUFFIX: -11

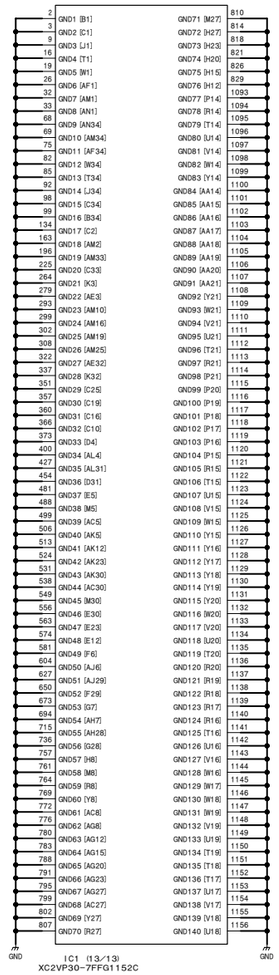

7-106

OTR-1 (1/12)
BOARD NO. 1-871-661-11
HDC3300_OTR-1_011_1

OTR-1 (2/12)
SUFFIX: -11

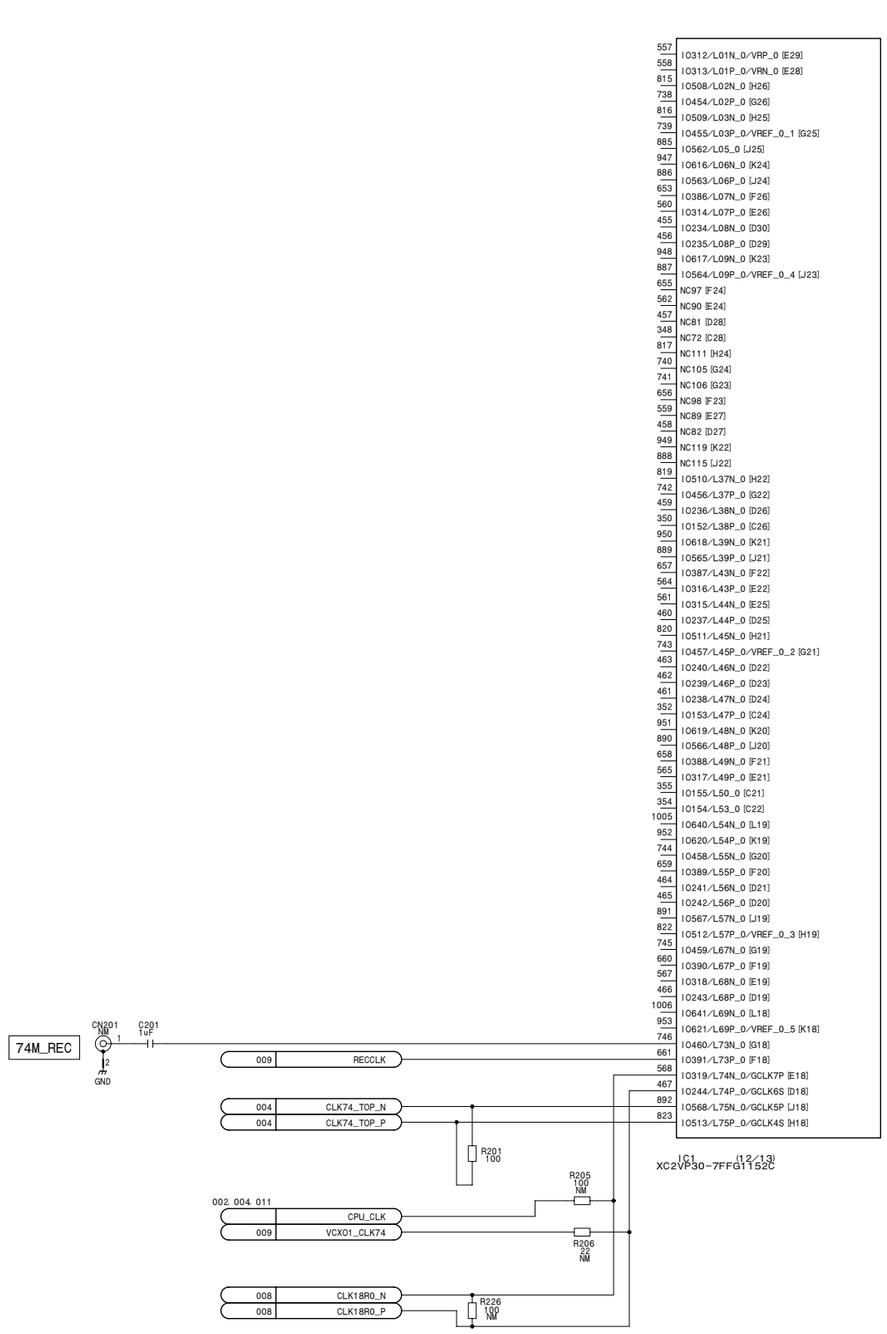


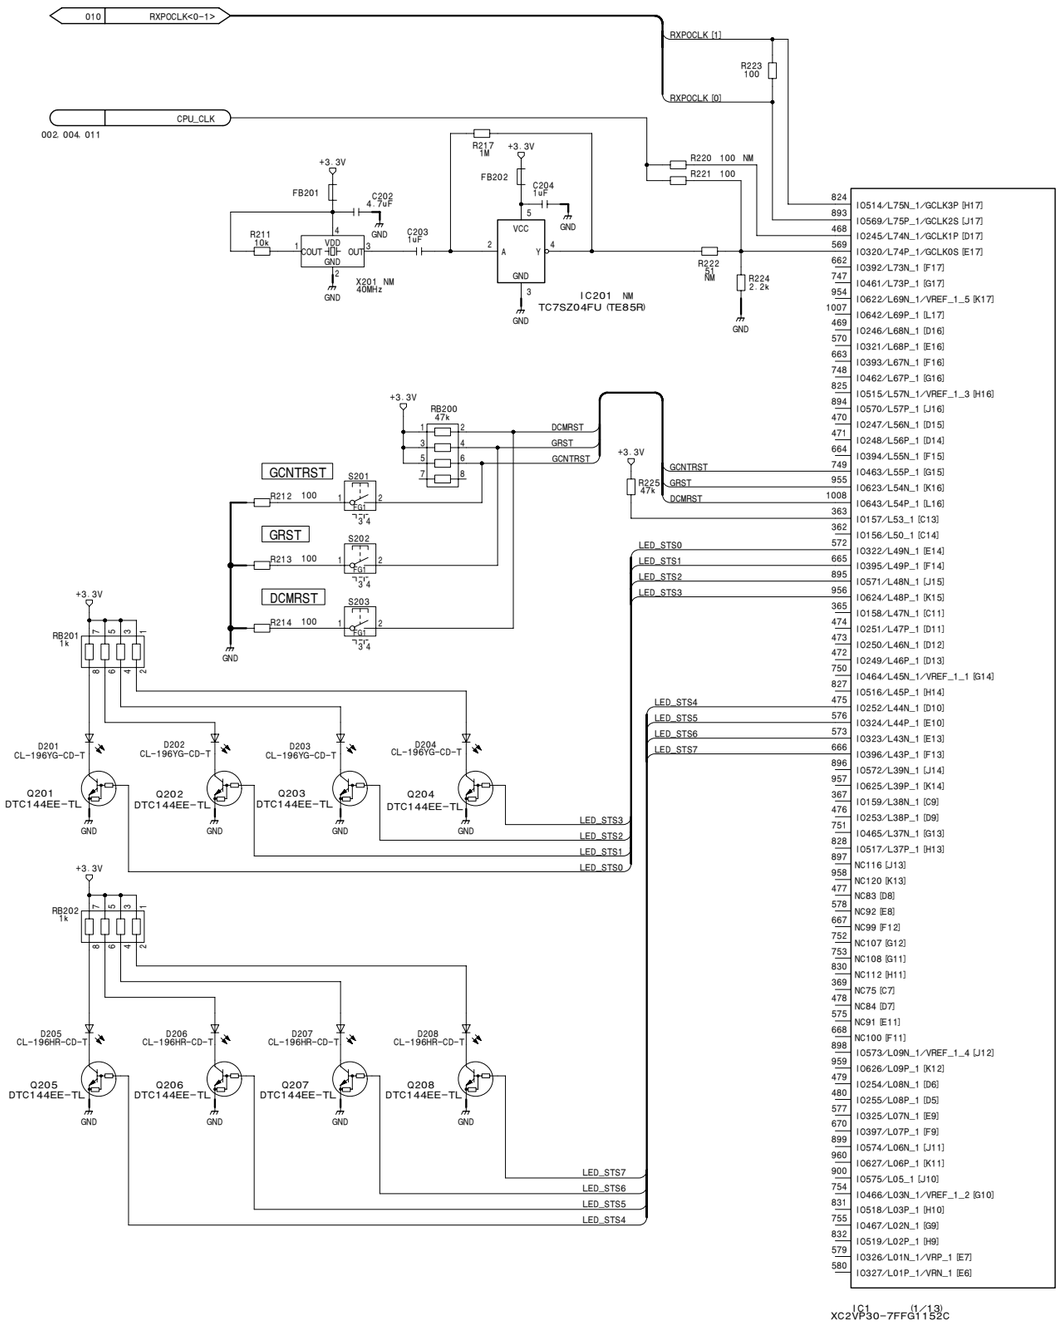


# OTR-1 (2/12)

BOARD NO. 1-871-661-11

HDC3300_OTR-1_011_2

# OTR-1 (3/12)
**SUFFIX: -11**

OTR-1 (3/12)
SUFFIX: -11

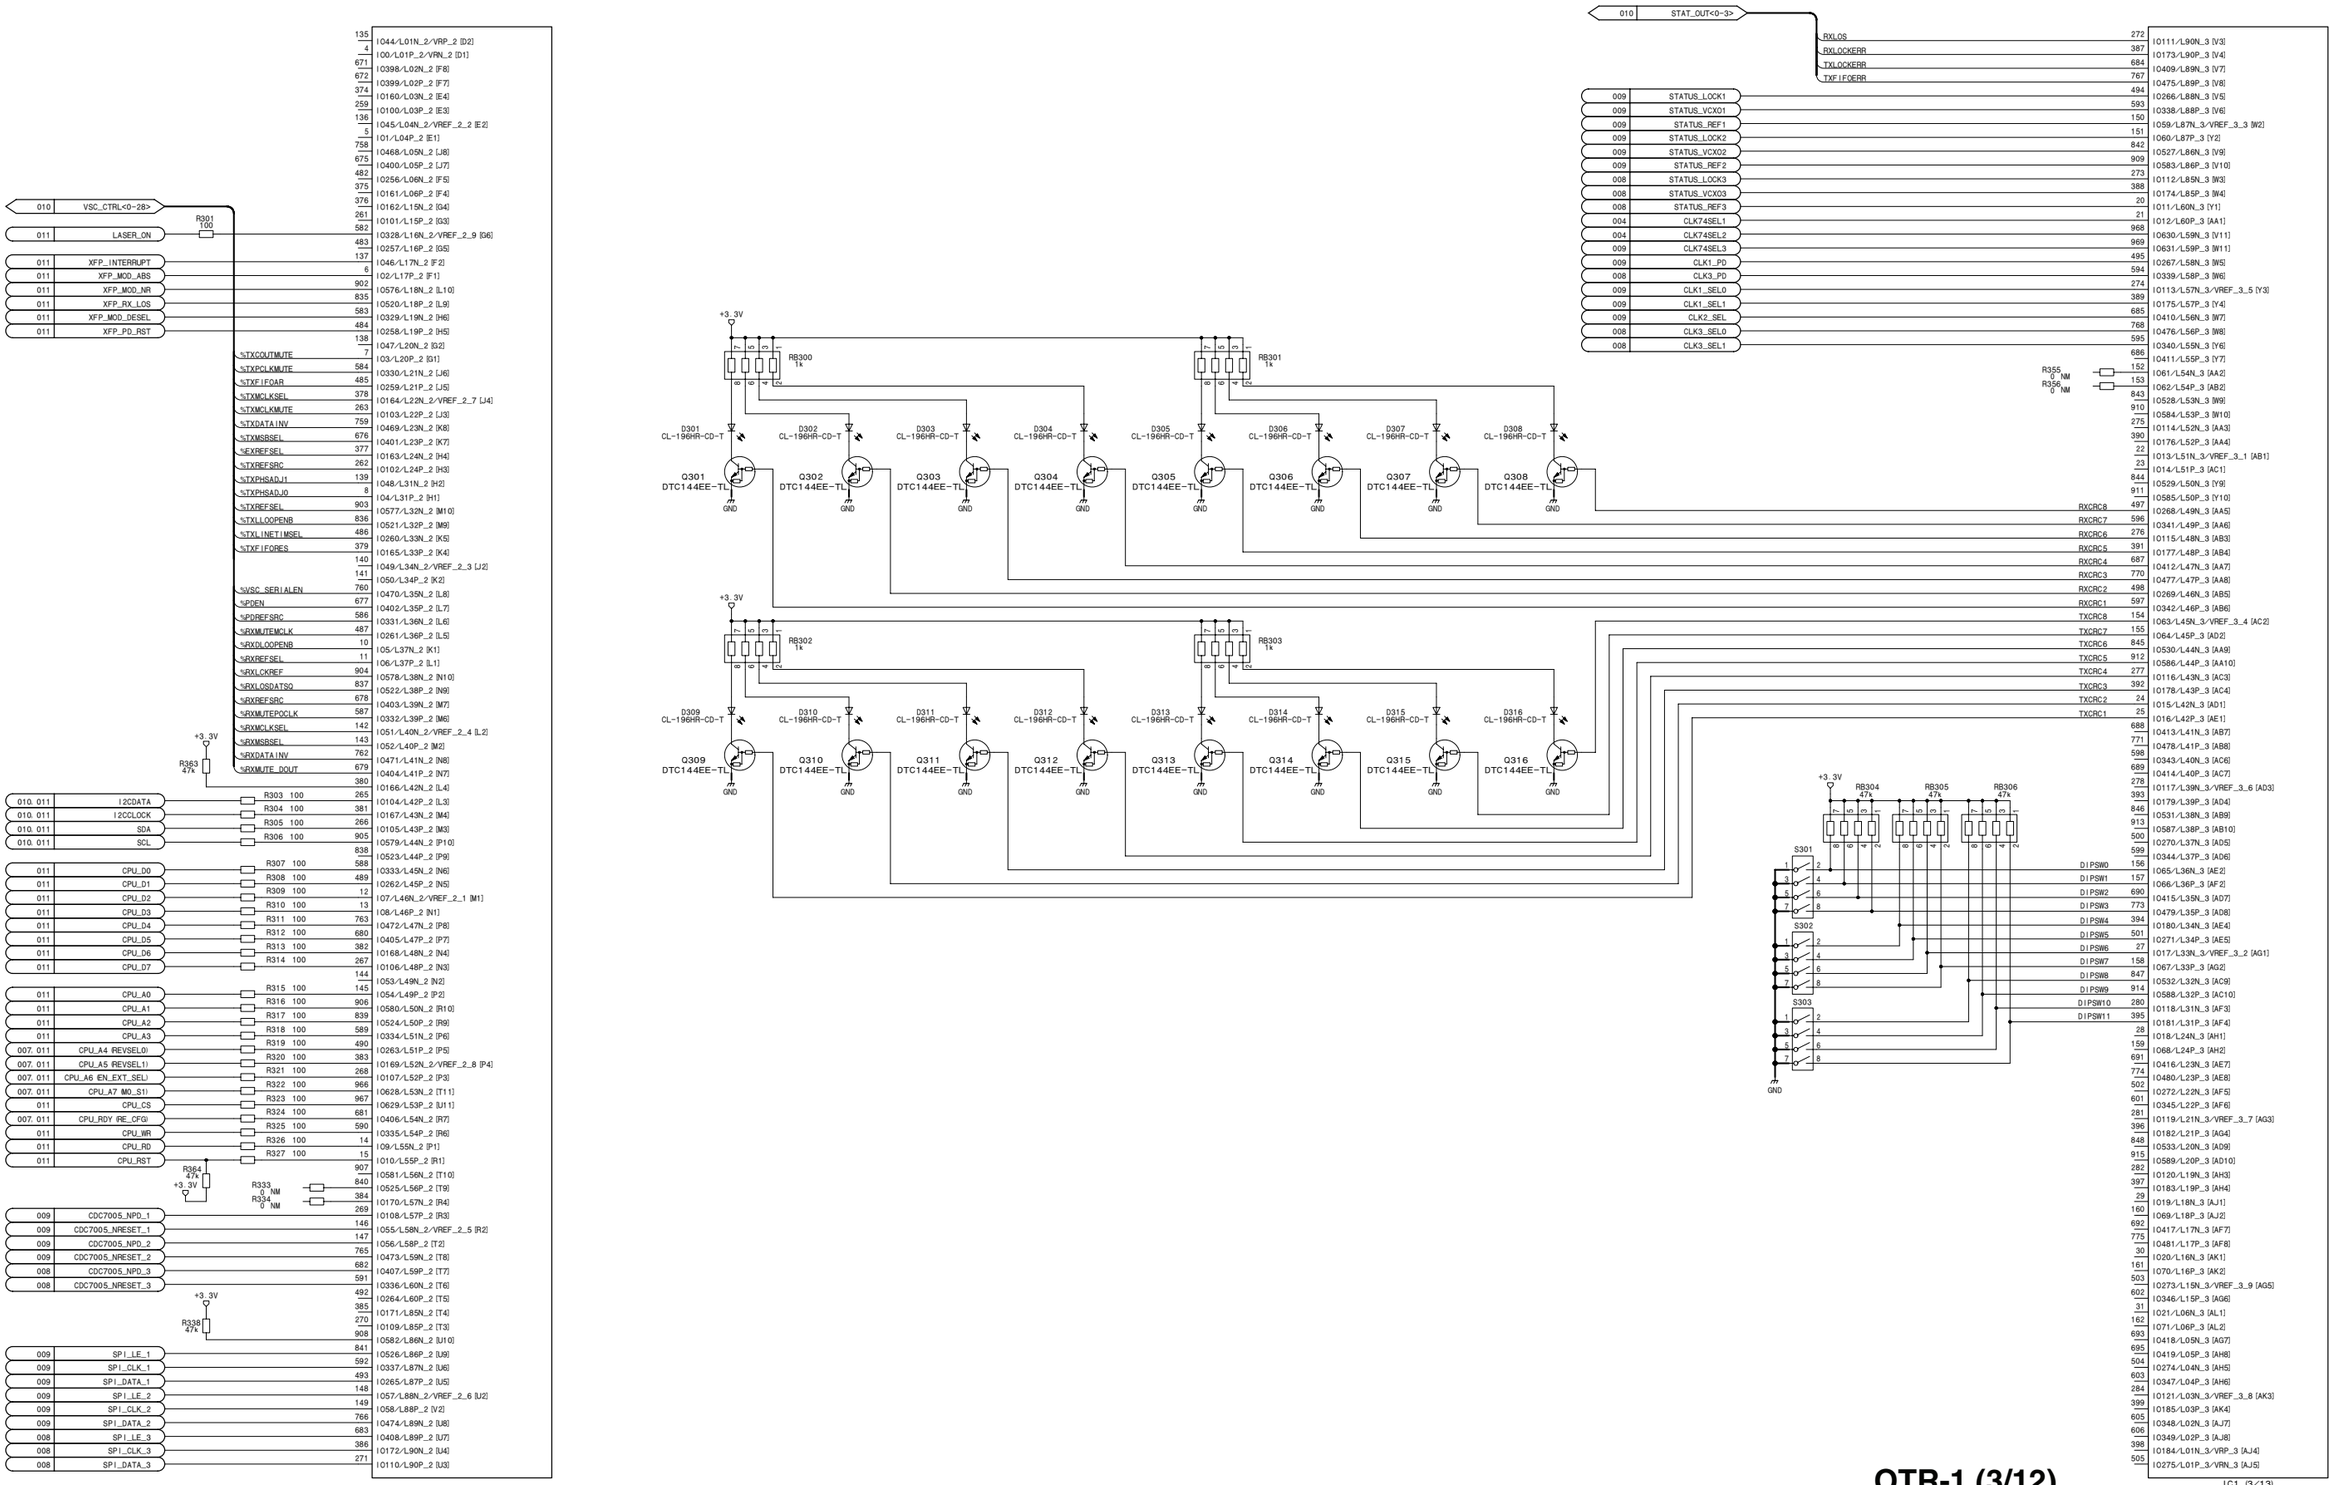


OTR-1 (3/12)
BOARD NO. 1-871-661-11
HDC3300_OTR-1_011_3


7-108
HDCU3300/MM (J,E)

# OTR-1 (4/12)
**SUFFIX: -11**


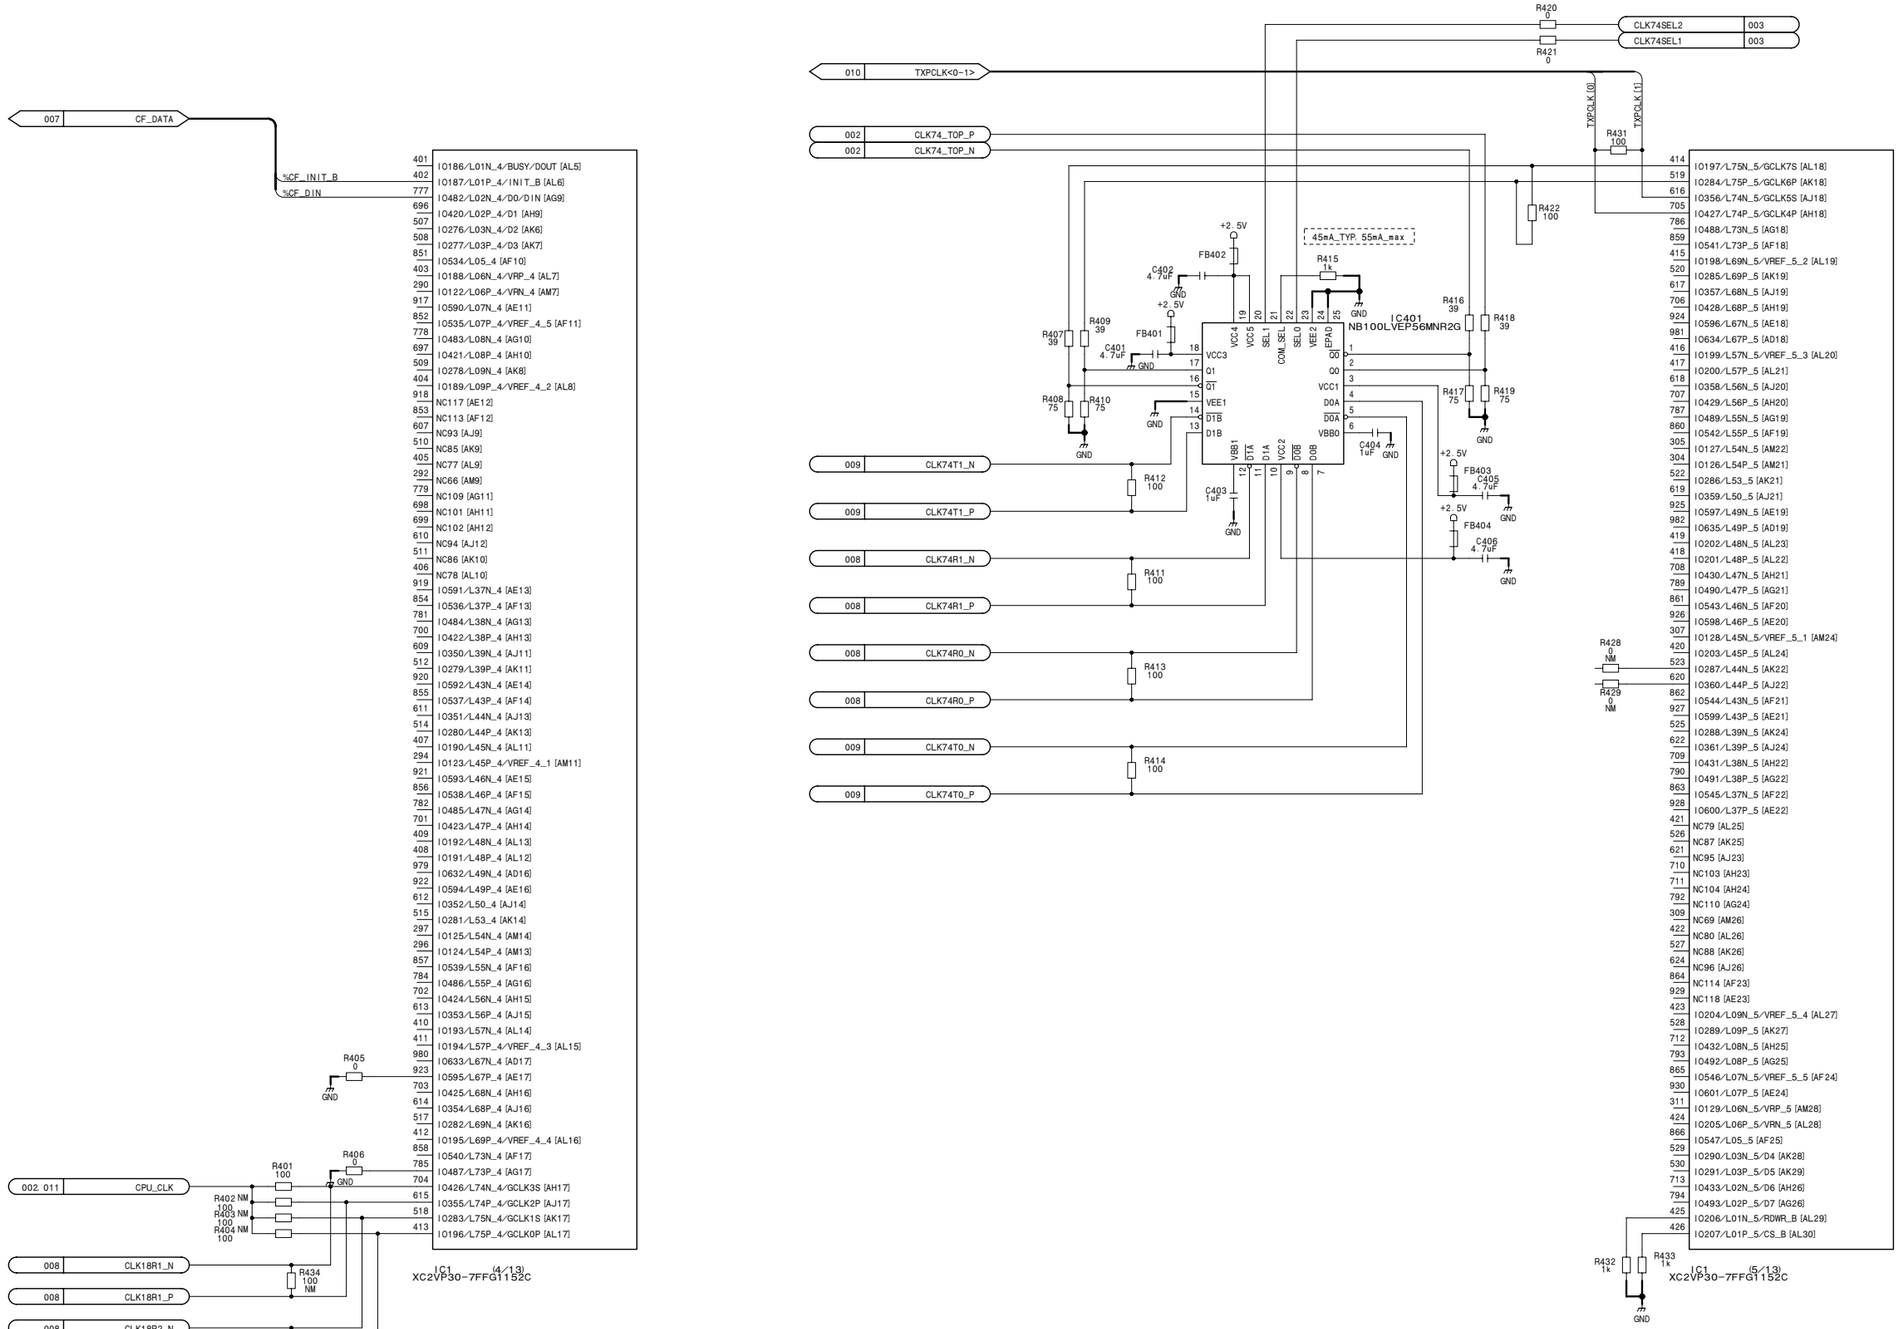


# OTR-1 (4/12)
BOARD NO. 1-871-661-11
HDC3300_OTR-1_011_4

# OTR-1 (5/12)
**SUFFIX: -11**

OTR-1 (5/12)
SUFFIX: -11

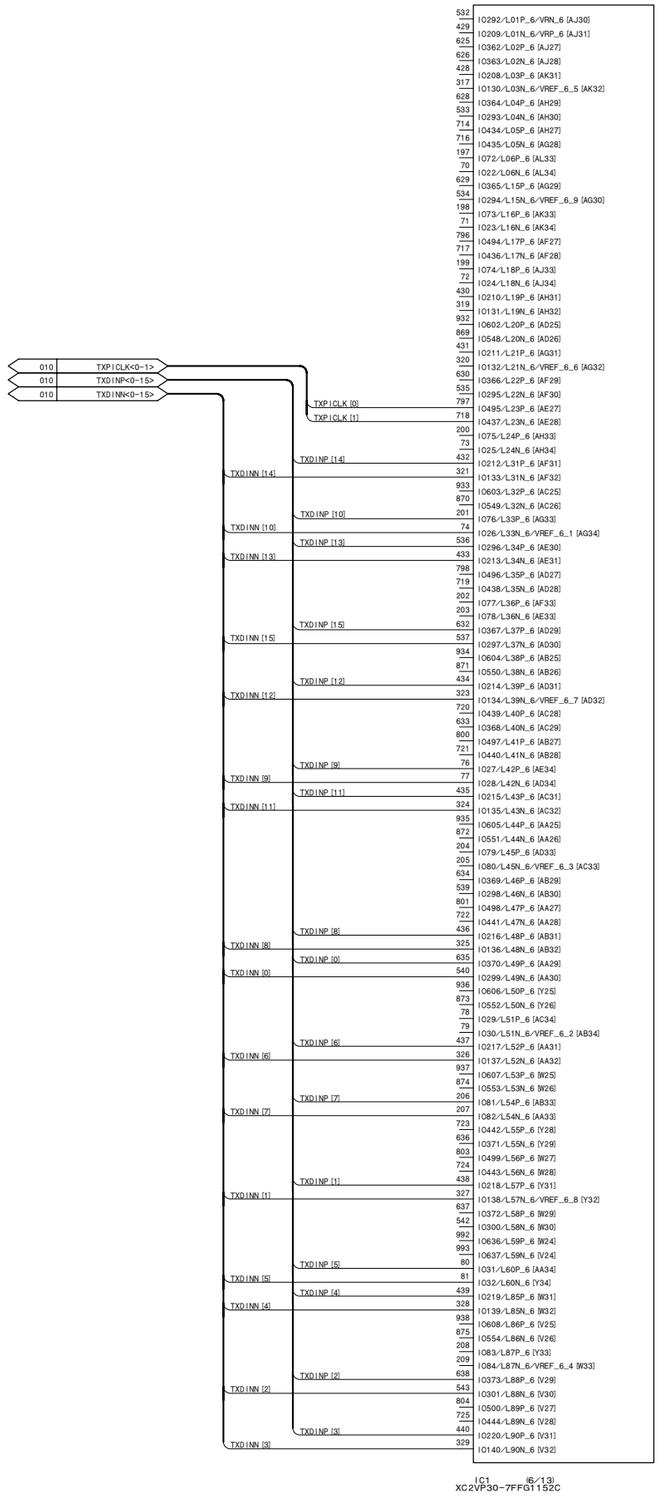


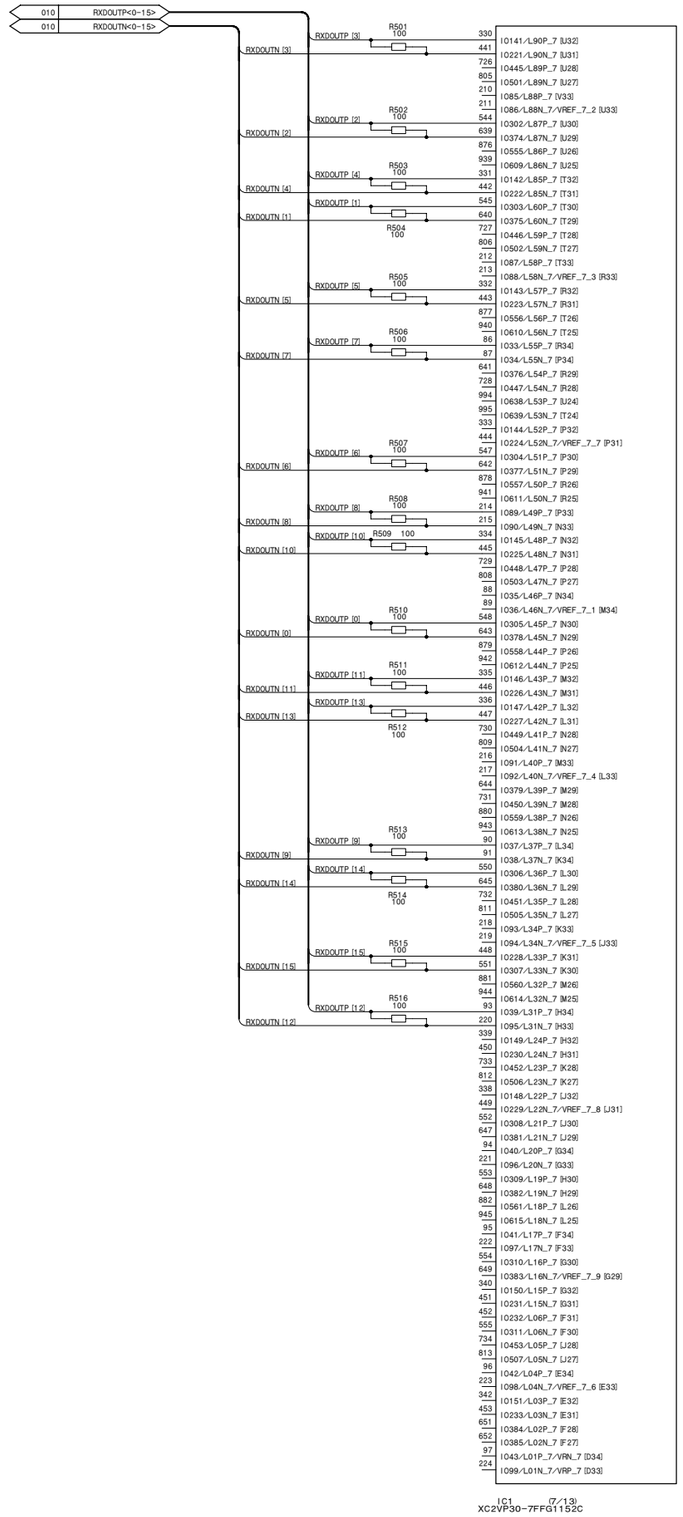


# OTR-1 (5/12)
BOARD NO. 1-871-661-11
HDC3300_OTR-1_011_5

# OTR-1 (6/12)

**SUFFIX: -11**

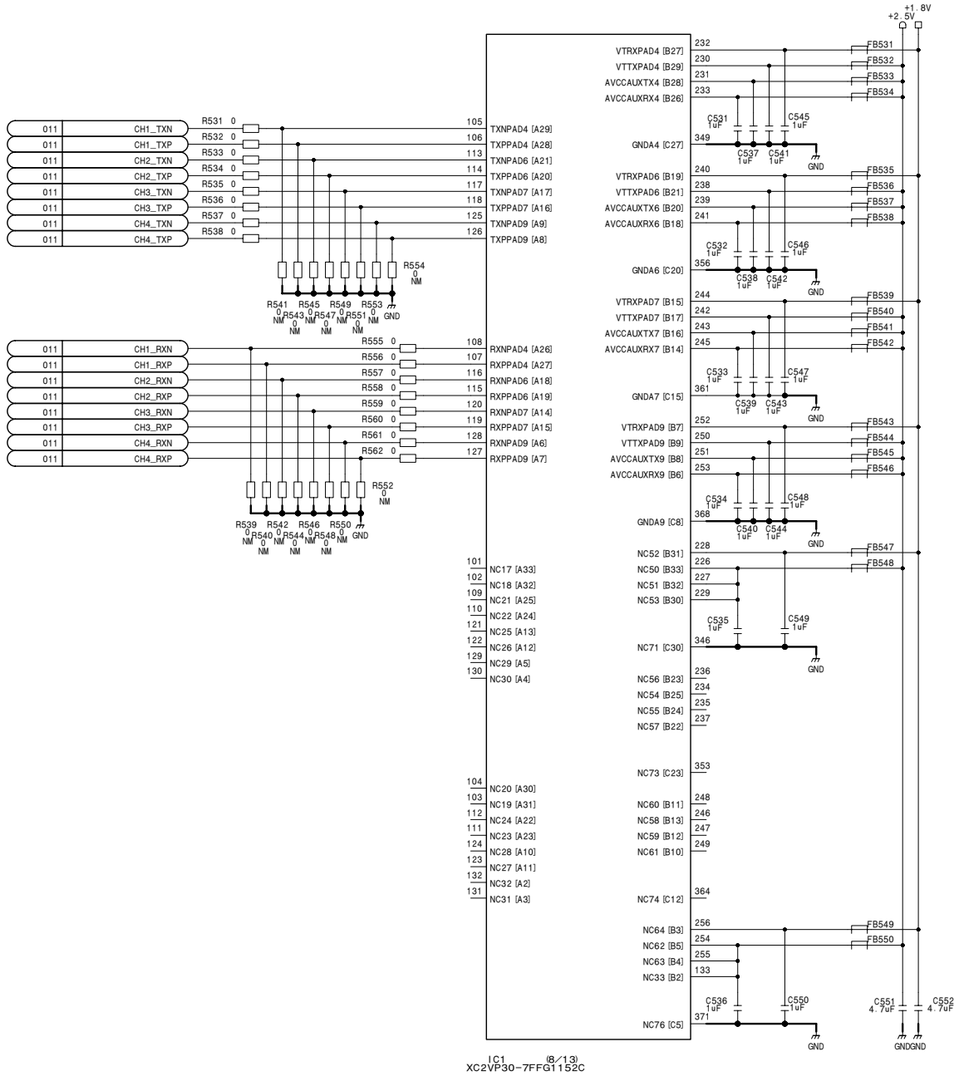


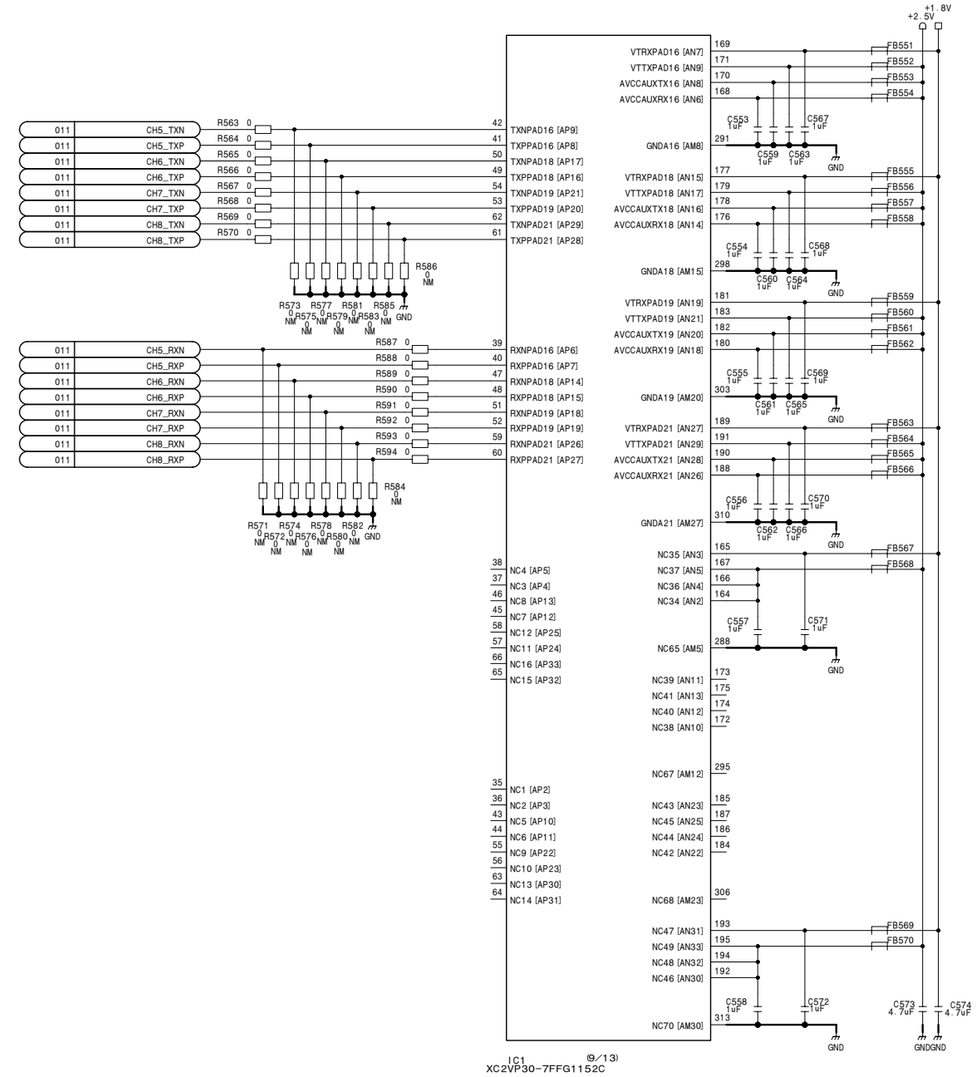


# OTR-1 (6/12)

BOARD NO. 1-871-661-11

HDC3300_OTR-1_011_6

| M2 | M1 | M0 | |
|---|---|---|---|
| 0 | 0 | 0 | Master Serial Mode |
| 1 | 1 | 1 | Slave Serial Mode |
| 0 | 1 | 1 | Master Select MAP Mode |
| 1 | 1 | 0 | Slave Select MAP Mode |
| 1 | 0 | 1 | Boundary Scan Mode |

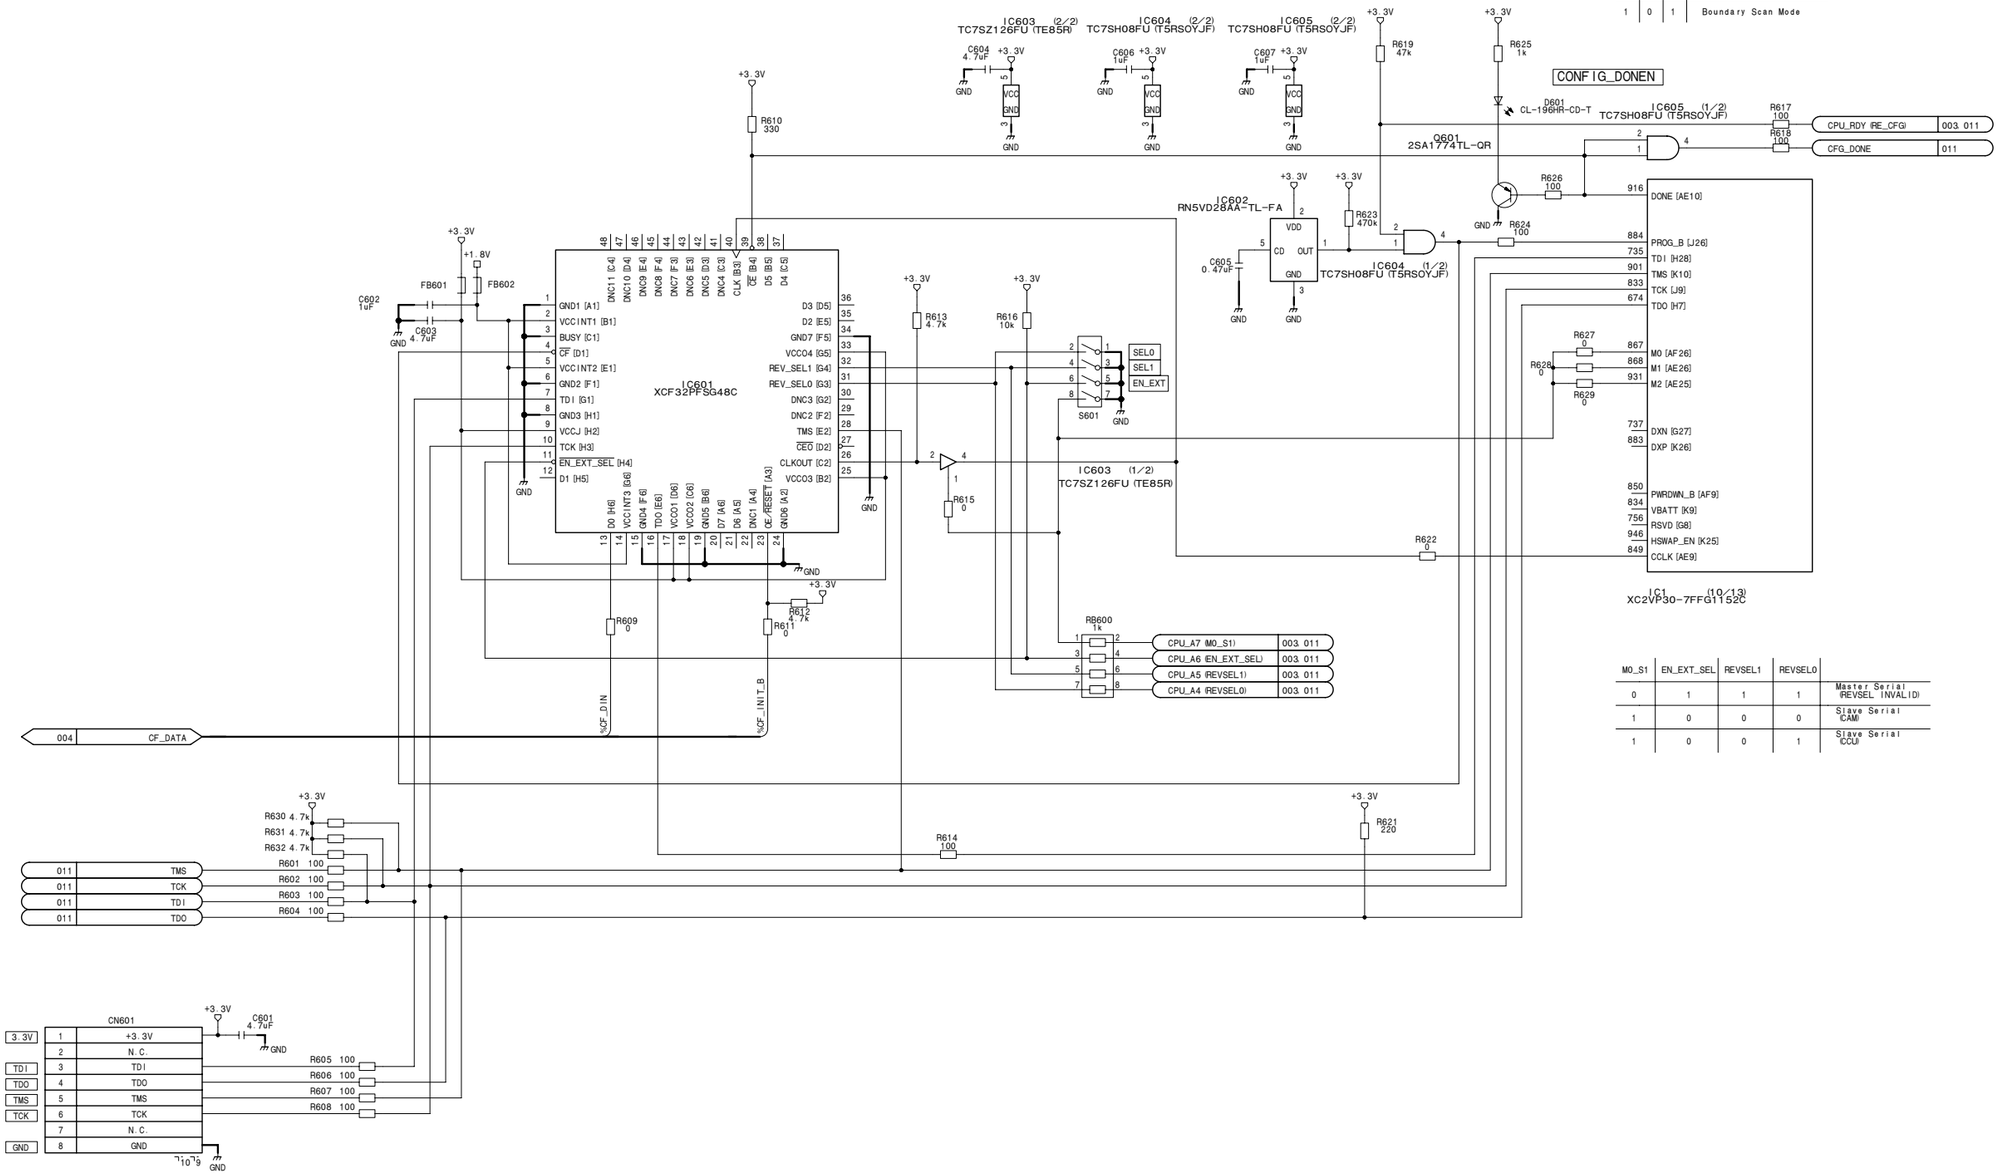


| MO_S1 | EN_EXT_SEL | REVSEL1 | REVSEL0 | |
|---|---|---|---|---|
| 0 | 1 | 1 | 1 | Master Serial (REVSEL INVALID) |
| 1 | 0 | 0 | 0 | Slave Serial (CAM) |
| 1 | 0 | 0 | 1 | Slave Serial (CCU) |

**OTR-1 (7/12)**
BOARD NO. 1-871-661-11
HDC3300_OTR-1_011_7

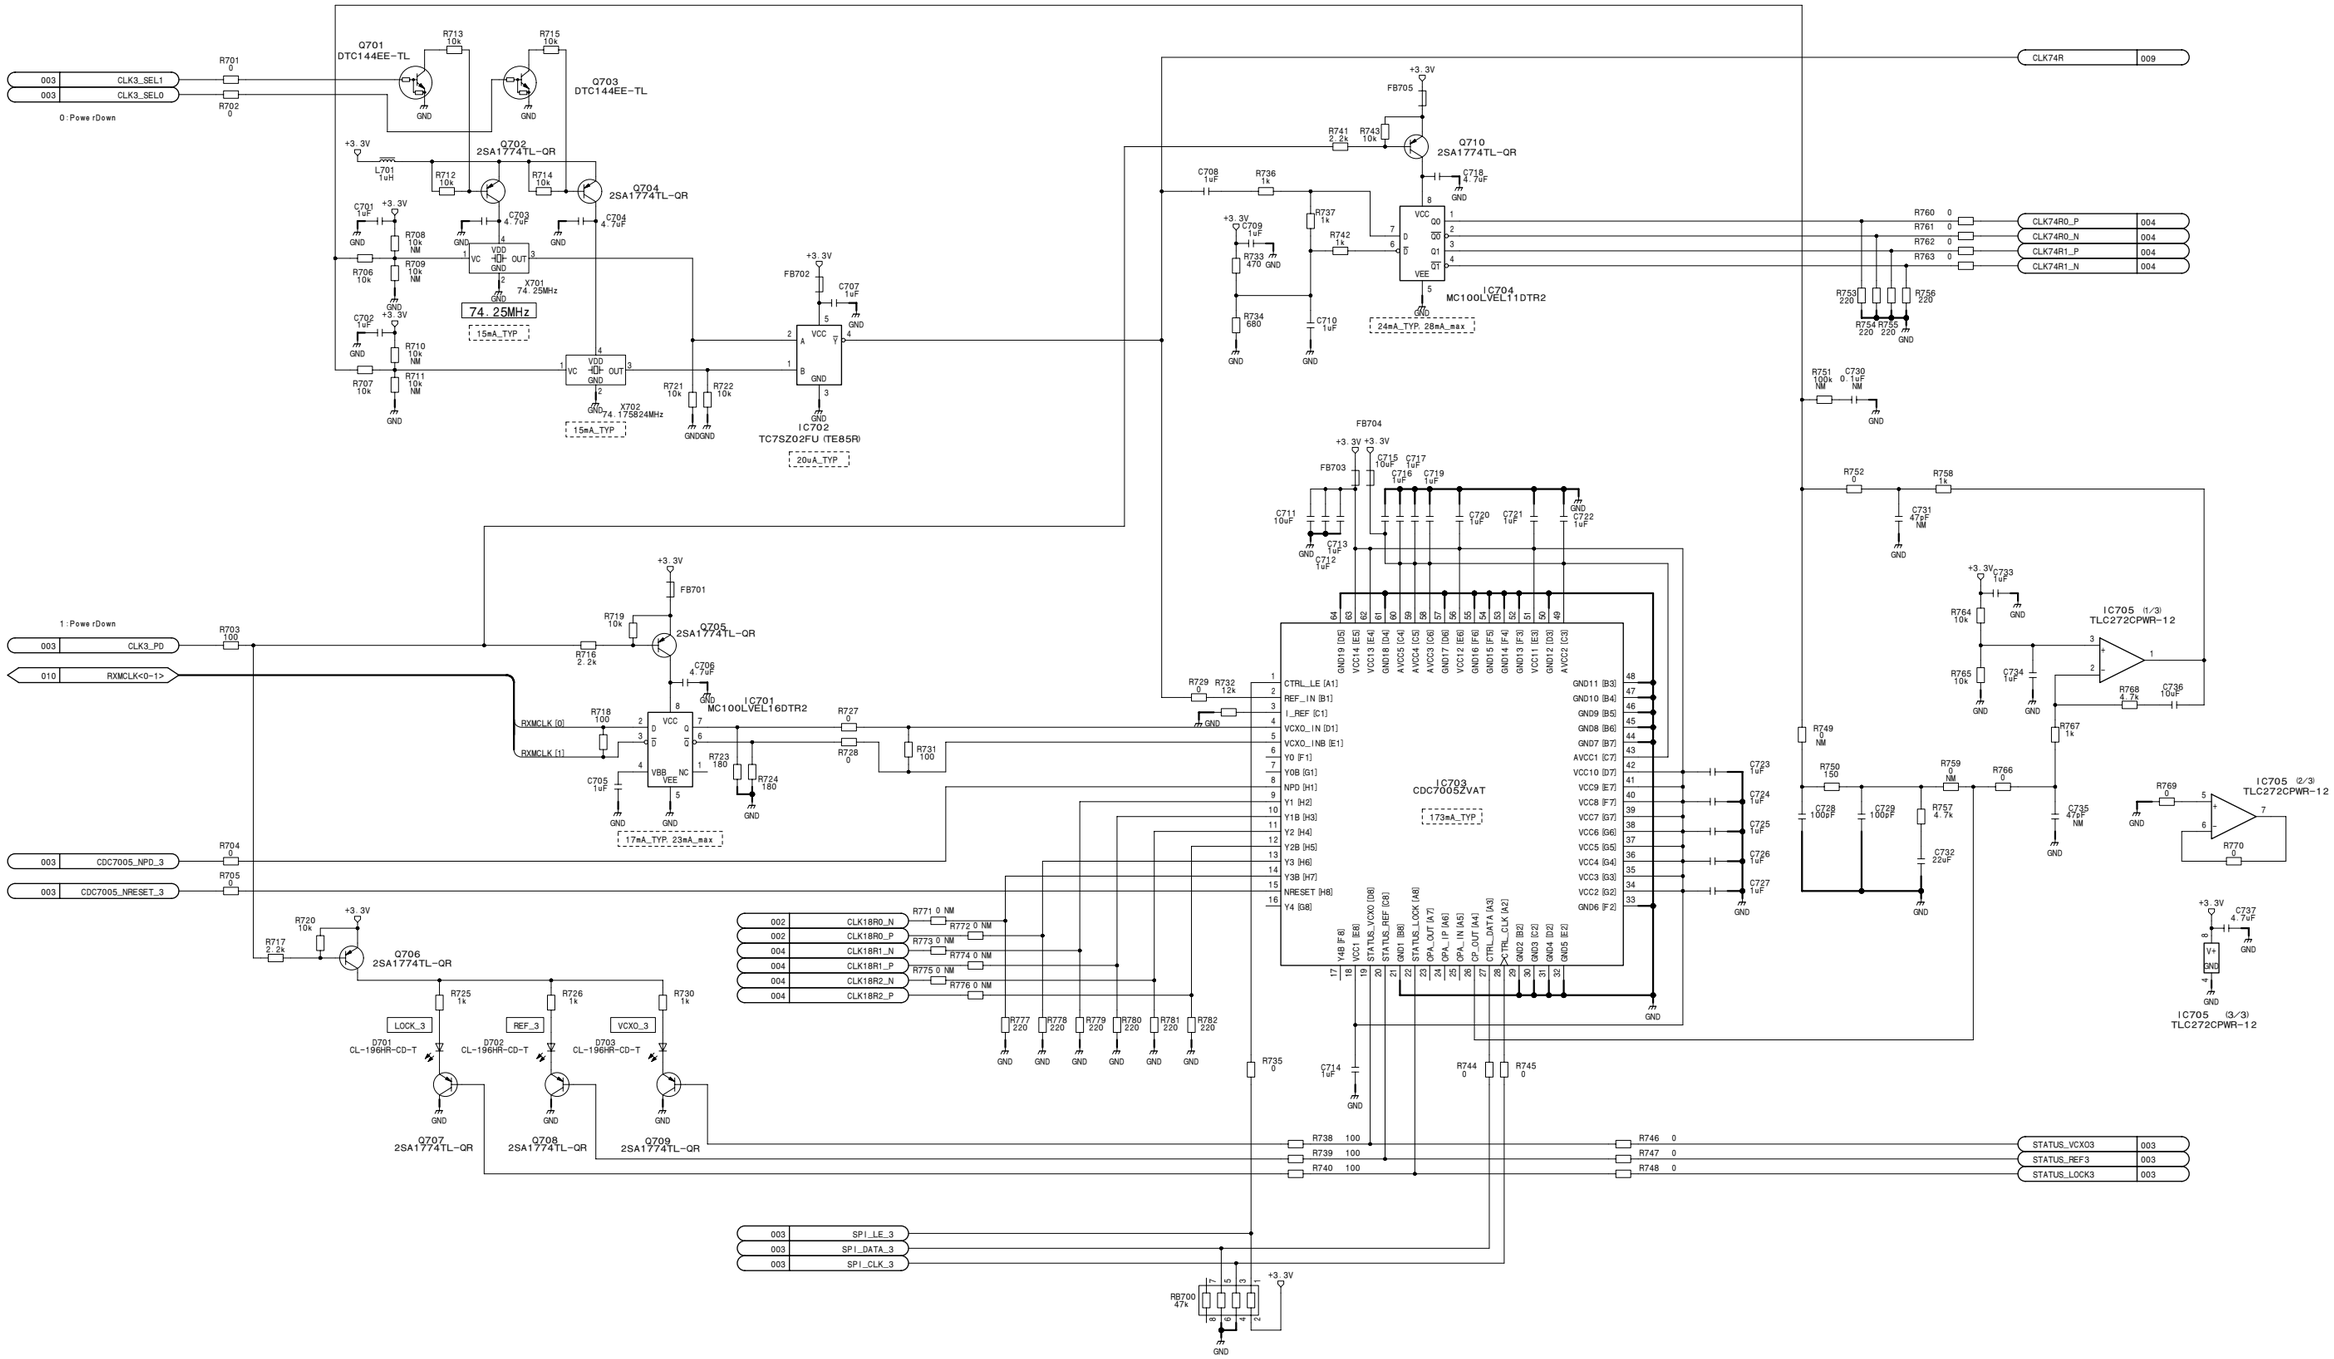


**OTR-1 (8/12)**
BOARD NO. 1-871-661-11
HDC3300_OTR-1_011_8

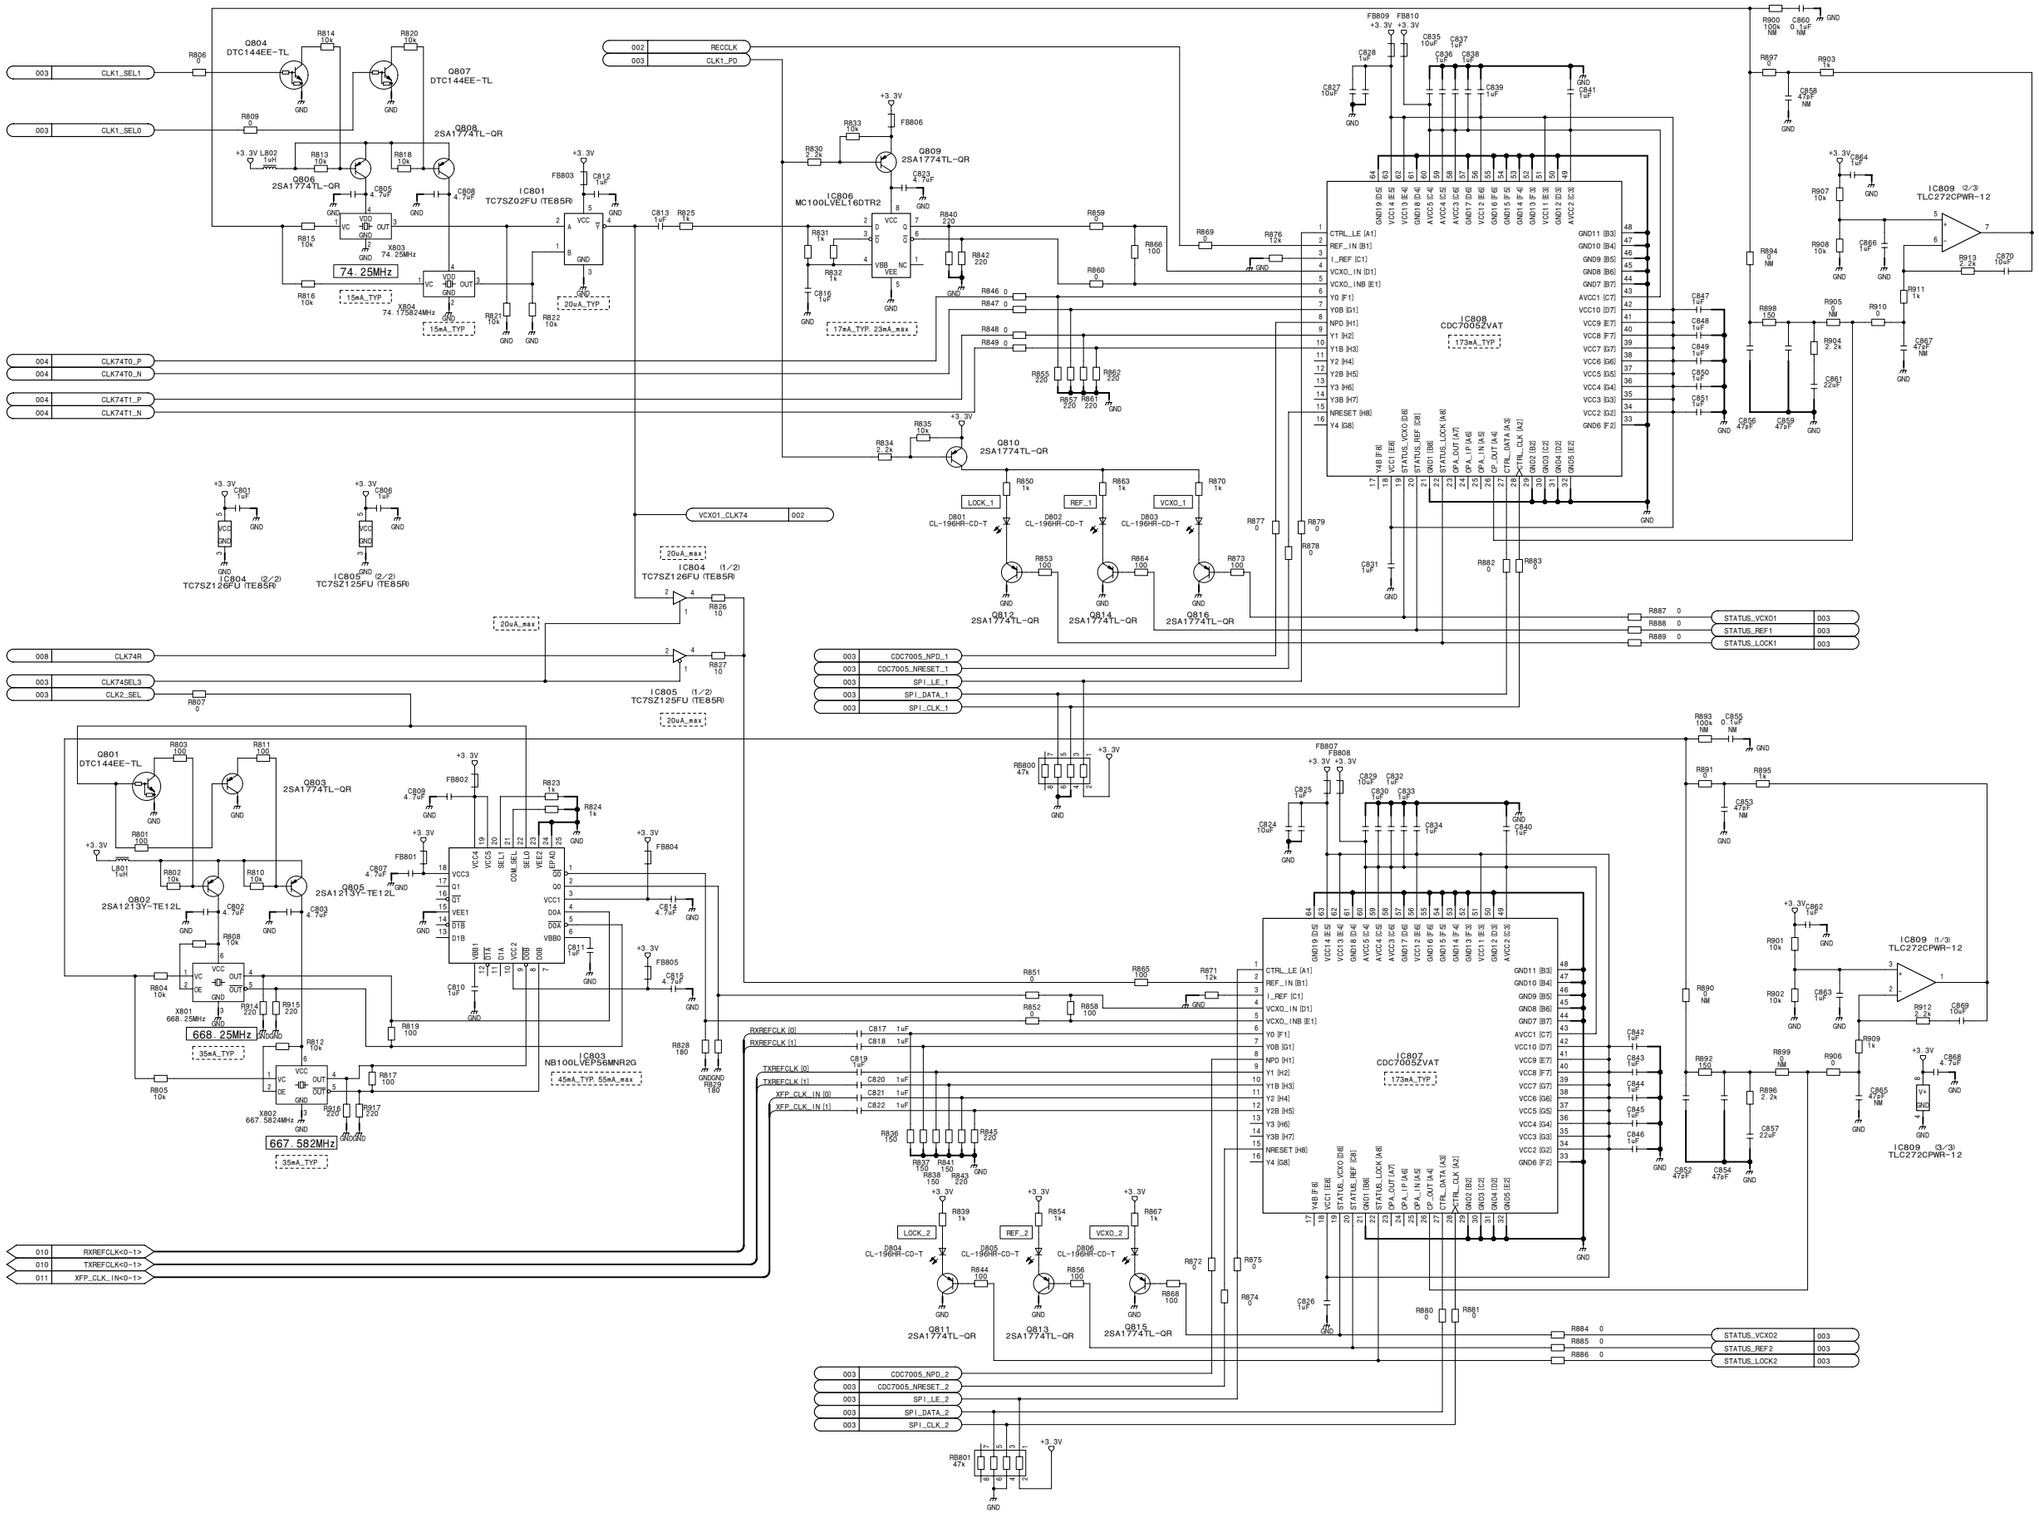


**OTR-1 (9/12)**
BOARD NO. 1-871-661-11
HDC3300_OTR-1_011_9

OTR-1 (10/12)
SUFFIX: -11

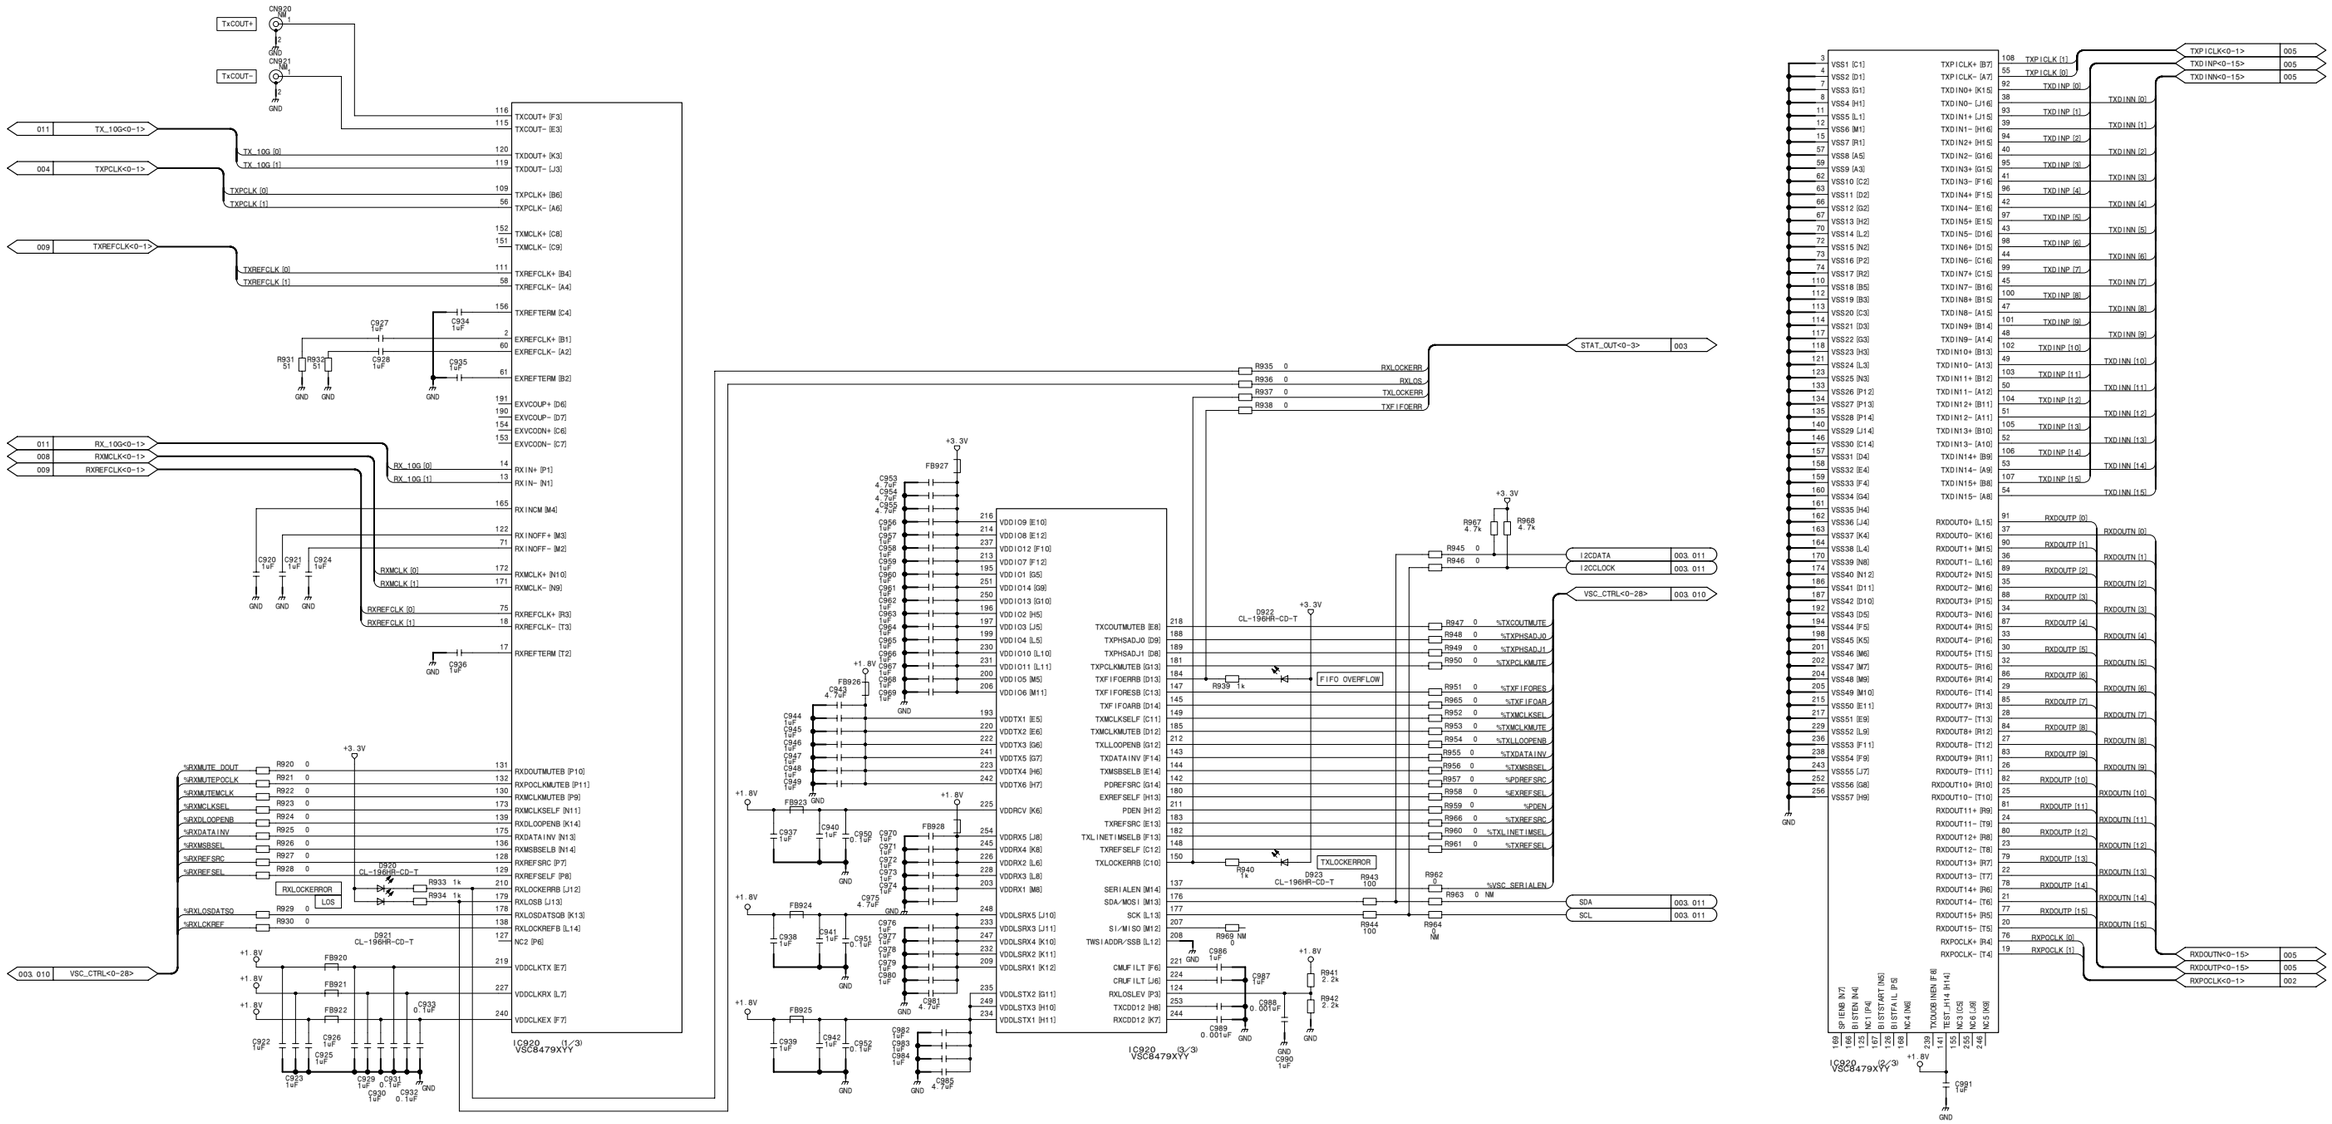


**OTR-1 (10/12)**
BOARD NO. 1-871-661-11
HDC3300_OTR-1_011_10

OTR-1 (11/12)
SUFFIX: -11

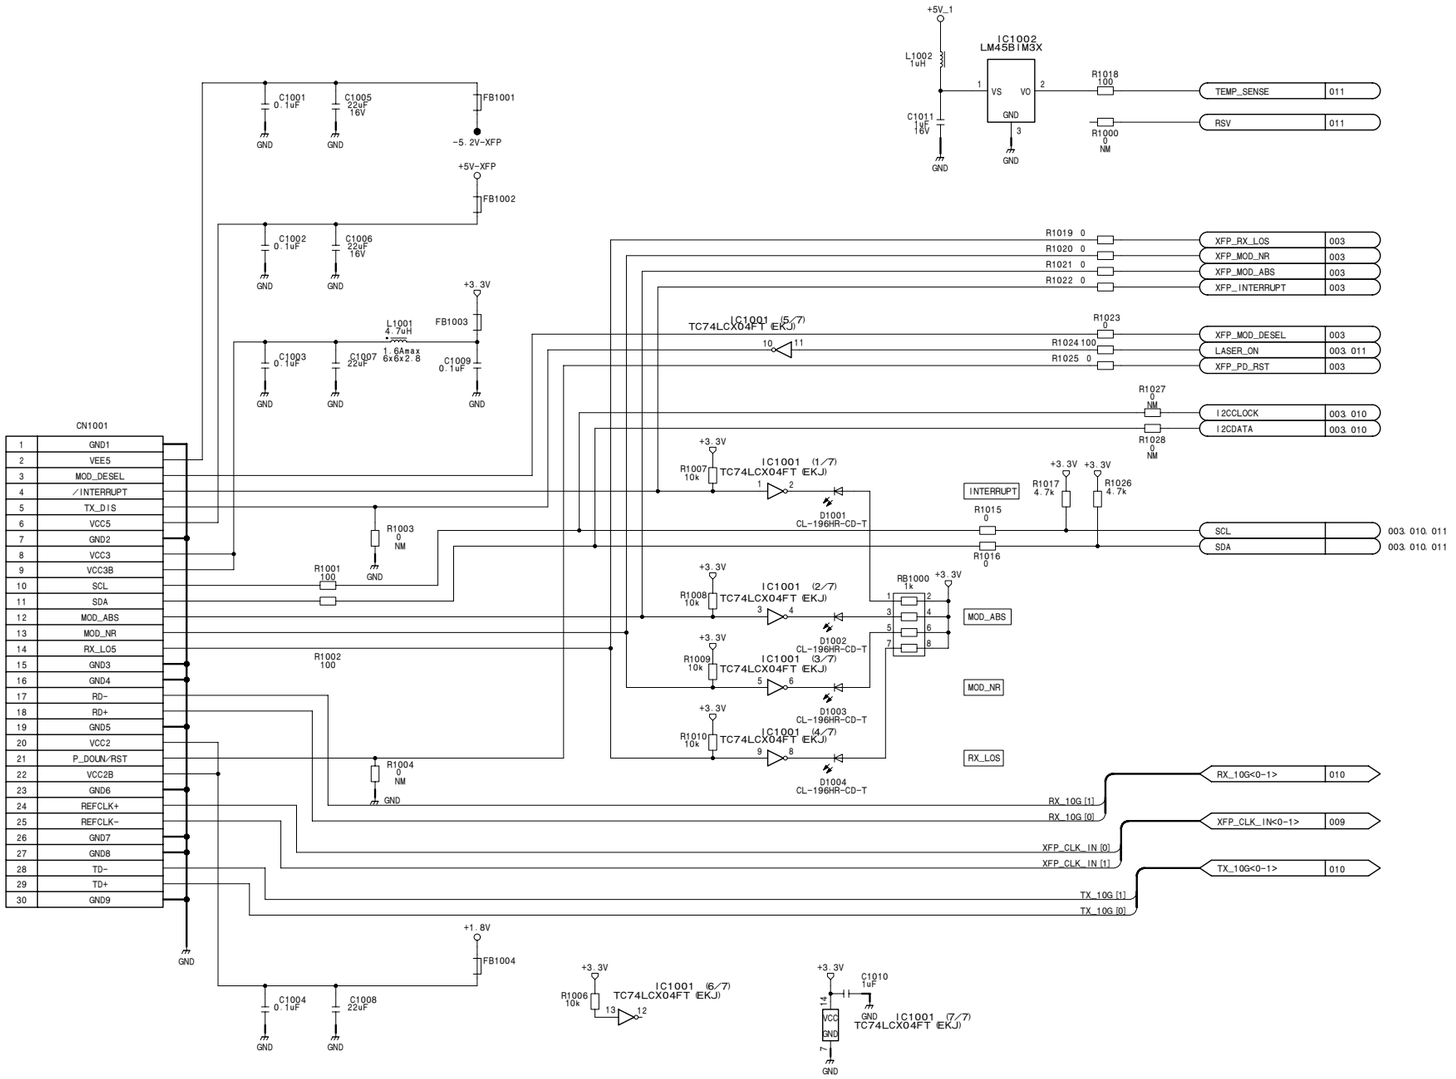


CN1002

| | | | |
|---|---|---|---|
| 1 | GND | 2 | GND |
| 3 | GND | 4 | GND |
| 5 | TEMP_SENSE | 6 | CH1_TXN |
| 7 | GND | 8 | CH1_TXP |
| 9 | GND | 10 | GND |
| 11 | SCL | 12 | CH1_RXP |
| 13 | SDA | 14 | CH1_RXN |
| 15 | GND | 16 | GND |
| 17 | CFG_DONE | 18 | CH2_TXN |
| 19 | RSV | 20 | CH2_TXP |
| 21 | LASER_ON | 22 | GND |
| 23 | TCK | 24 | CH2_RXP |
| 25 | TMS | 26 | CH2_RXN |
| 27 | GND | 28 | GND |
| 29 | TDI | 30 | CH3_TXN |
| 31 | TDO | 32 | CH3_TXP |
| 33 | GND | 34 | GND |
| 35 | CPU_RST | 36 | CH3_RXP |
| 37 | CPU_RDY (RE_CFG) | 38 | CH3_RXN |
| 39 | GND | 40 | GND |
| 41 | CPU_D0 | 42 | CH4_TXN |
| 43 | CPU_D1 | 44 | CH4_TXP |
| 45 | GND | 46 | GND |
| 47 | CPU_D2 | 48 | CH4_RXP |
| 49 | CPU_D3 | 50 | CH4_RXN |
| 51 | GND | 52 | GND |
| 53 | CPU_D4 | 54 | CH5_TXN |
| 55 | CPU_D5 | 56 | CH5_TXP |
| 57 | GND | 58 | GND |
| 59 | CPU_D6 | 60 | CH5_RXP |
| 61 | CPU_D7 | 62 | CH5_RXN |
| 63 | GND | 64 | GND |
| 65 | CPU_CS | 66 | CH6_TXN |
| 67 | CPU_A7 (M0_S1) | 68 | CH6_TXP |
| 69 | CPU_A6 (EN_EXT_SEL) | 70 | GND |
| 71 | CPU_A5 (REVSEL1) | 72 | CH6_RXP |
| 73 | CPU_A4 (REVSEL0) | 74 | CH6_RXN |
| 75 | GND | 76 | GND |
| 77 | CPU_A3 | 78 | CH7_TXN |
| 79 | CPU_A2 | 80 | CH7_TXP |
| 81 | GND | 82 | GND |
| 83 | CPU_A1 | 84 | CH7_RXP |
| 85 | CPU_A0 | 86 | CH7_RXN |
| 87 | GND | 88 | GND |
| 89 | CPU_WR | 90 | CH8_TXN |
| 91 | CPU_RD | 92 | CH8_TXP |
| 93 | GND | 94 | GND |
| 95 | CPU_CLK | 96 | CH8_RXP |
| 97 | GND | 98 | CH8_RXN |
| 99 | GND | 100 | GND |
| 101 | GND | 102 | GND |
| 103 | GND | 104 | GND |
| 105 | +5V | 106 | +5V |
| 107 | +5V | 108 | +5V |
| 109 | +5V | 110 | +5V |
| 111 | +5V | 112 | +5V |
| 113 | +5V | 114 | +5V |
| 115 | +5V | 116 | +5V |
| 117 | +5V | 118 | +5V |
| 119 | +5V | 120 | +5V |





7-116

**OTR-1 (11/12)**
BOARD NO. 1-871-661-11
HDC3300_OTR-1_011_11

HDCU3300/MM (J,E)

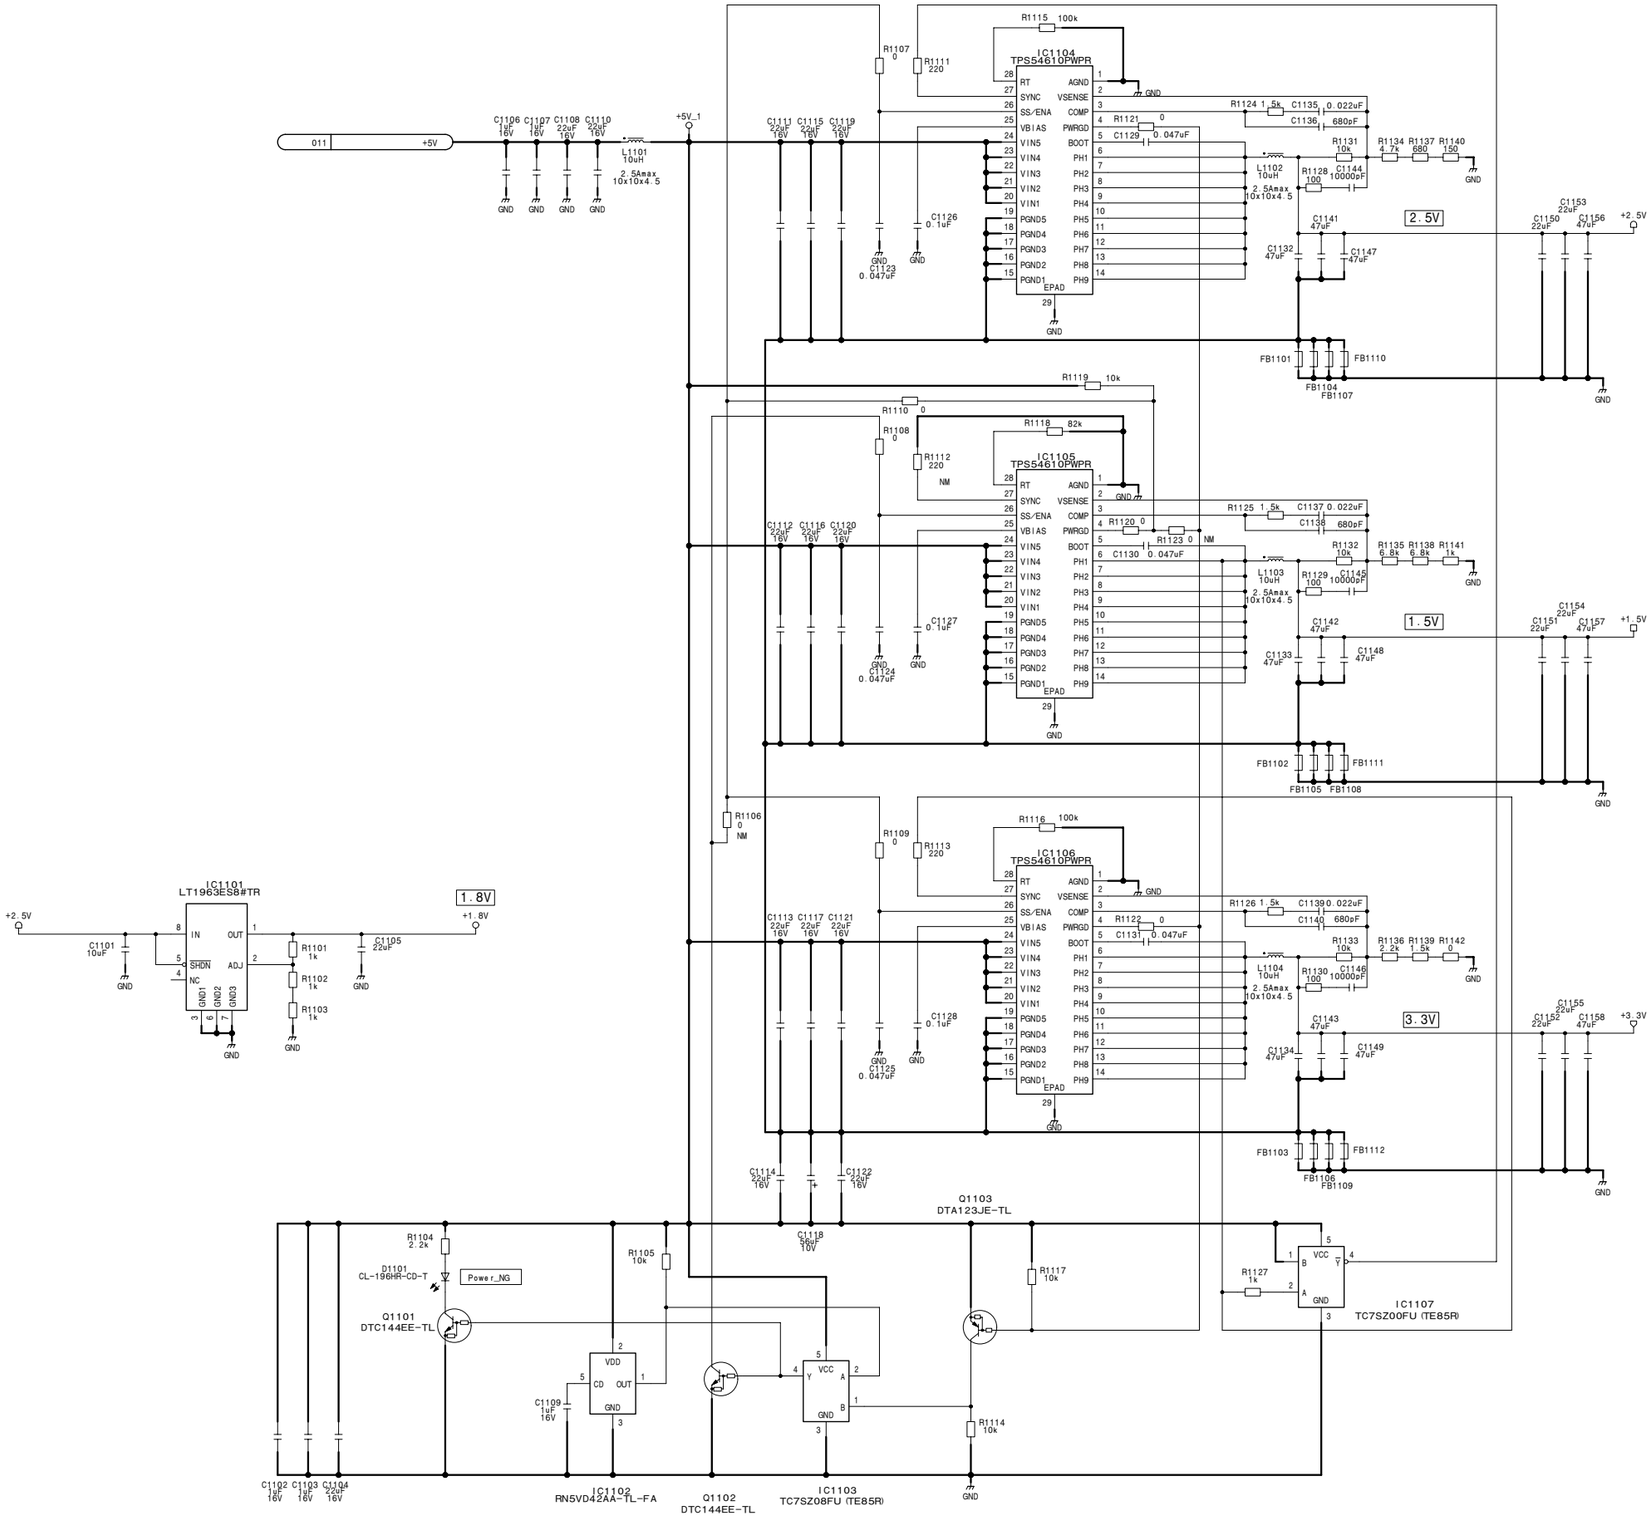


7-117 7-117

**OTR-1 (12/12)**
BOARD NO. 1-871-661-11
HDC3300_OTR-1_011_12

HDCU3300/MM (J,E)

A B C D E F G H

1 2 3 4 5

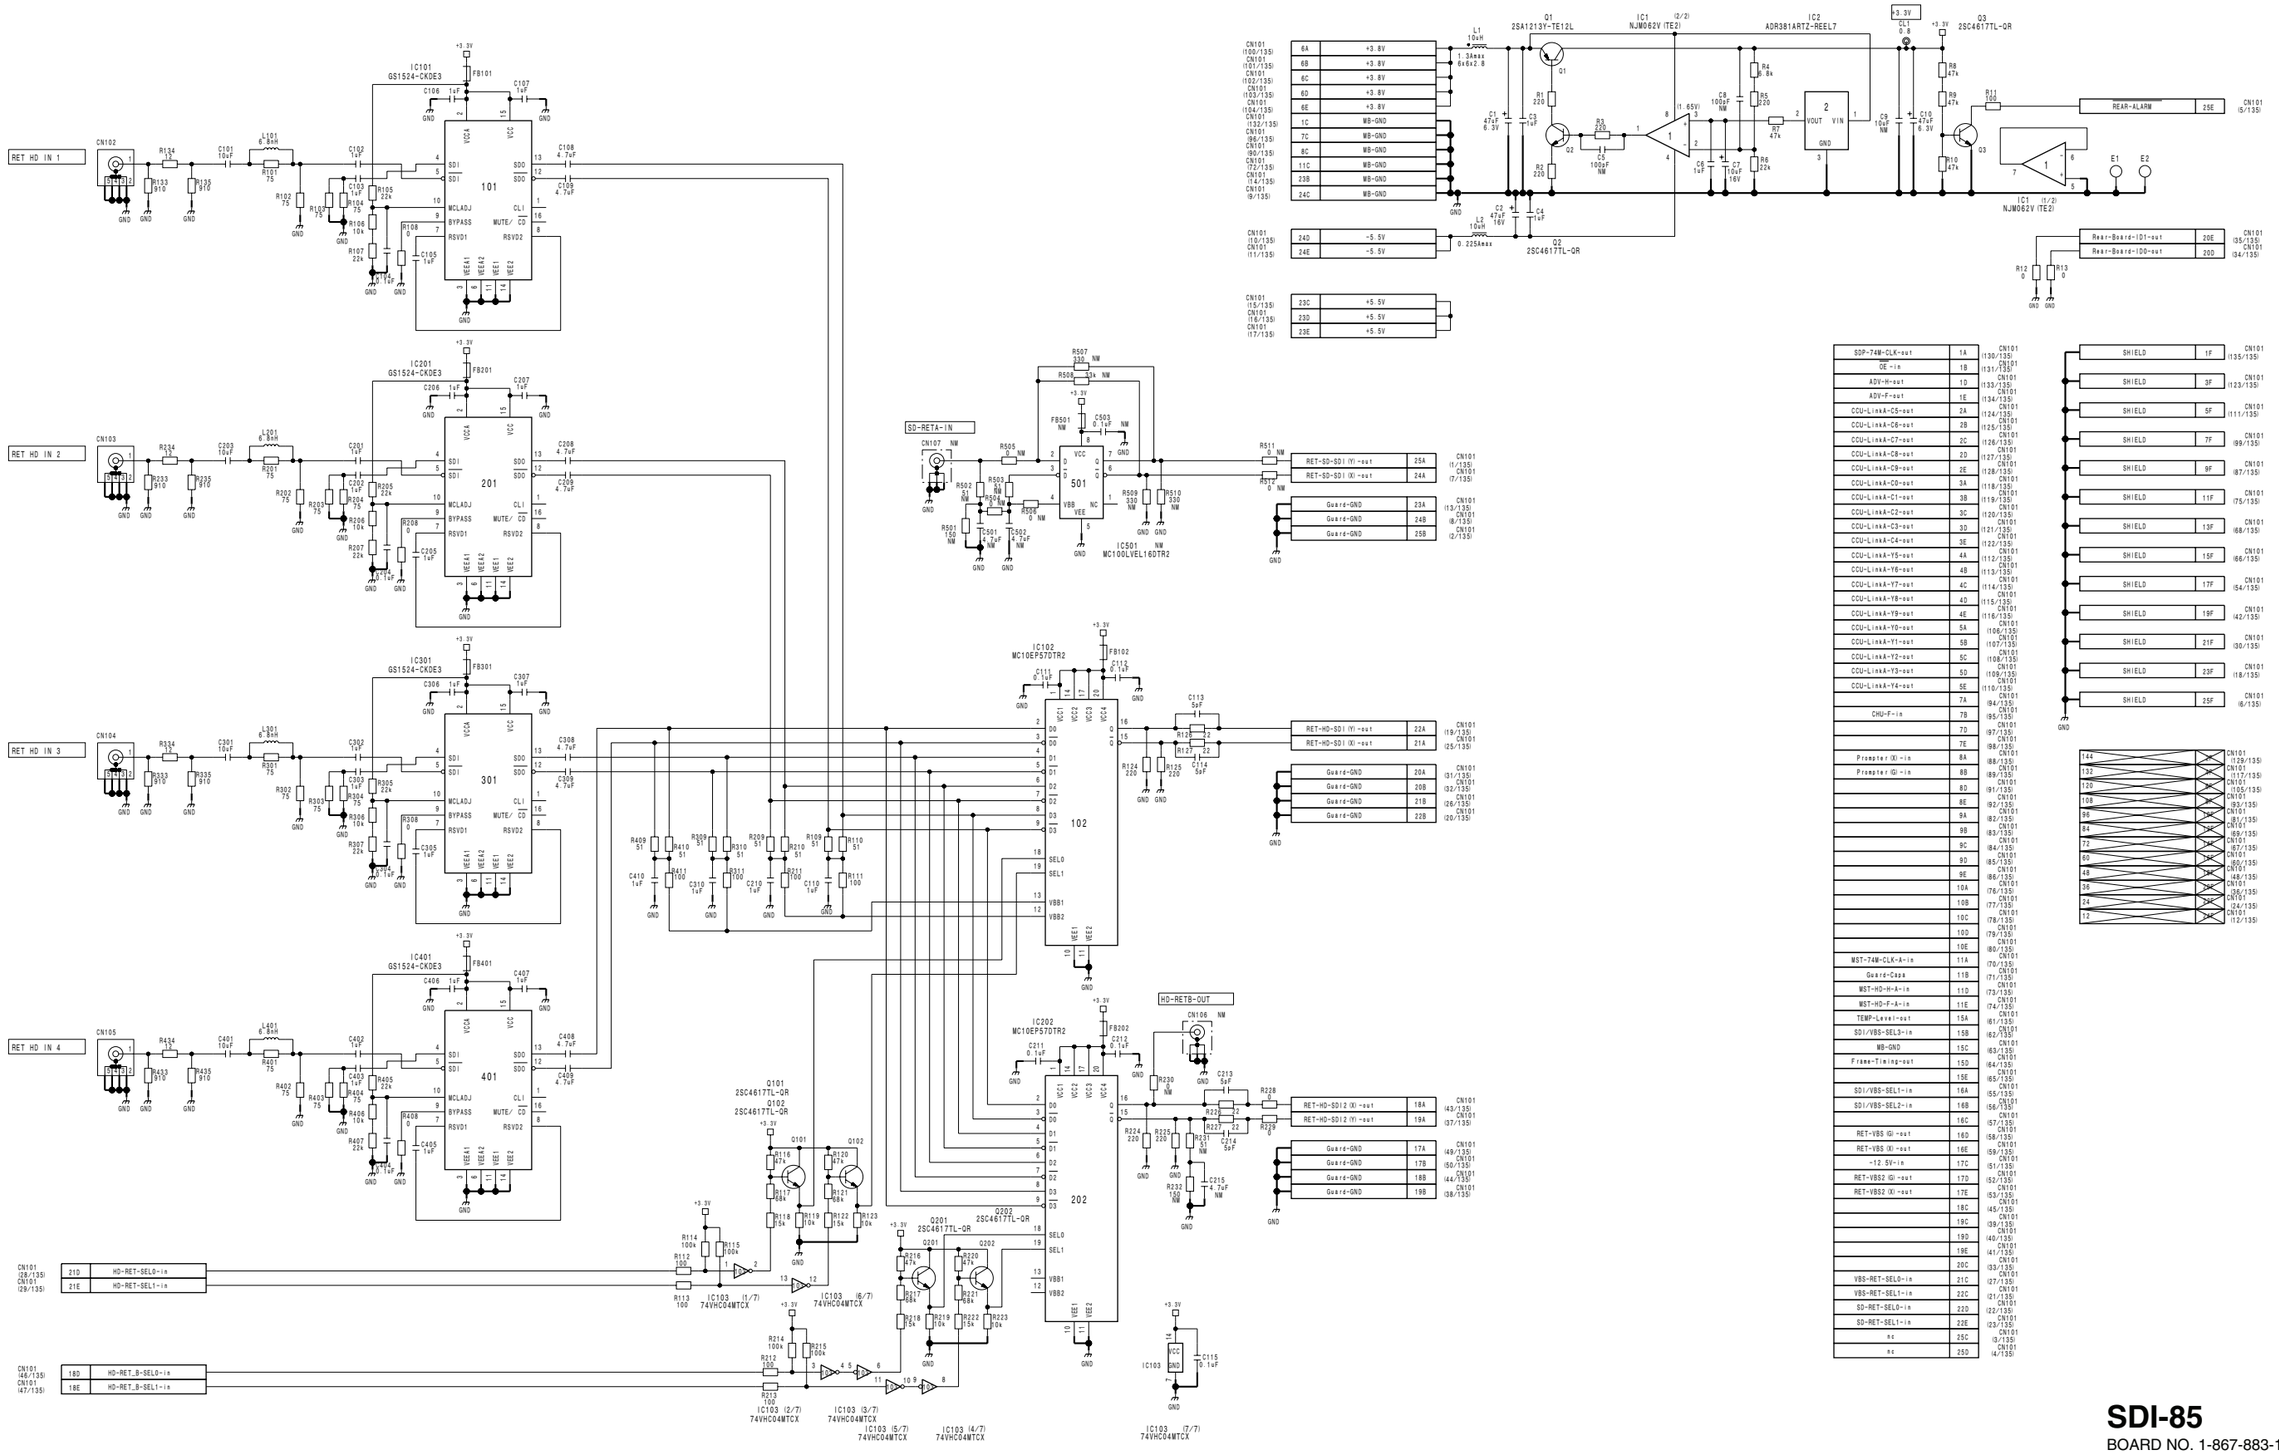


| | | |
|---|---|---|
| SDP-74W-CLK-out | 1A | CN101 (130/135) |
| OE-in | 1B | CN101 (131/135) |
| AZV-H-out | 1D | CN101 (133/135) |
| AZV-F-out | 1E | CN101 (134/135) |
| CCU-LinkA-C5-out | 2A | CN101 (124/135) |
| CCU-LinkA-C6-out | 2B | CN101 (125/135) |
| CCU-LinkA-C7-out | 2C | CN101 (126/135) |
| CCU-LinkA-C8-out | 2D | CN101 (127/135) |
| CCU-LinkA-C9-out | 2E | CN101 (128/135) |
| CCU-LinkA-C0-out | 3A | CN101 (118/135) |
| CCU-LinkA-C1-out | 3B | CN101 (119/135) |
| CCU-LinkA-C2-out | 3C | CN101 (120/135) |
| CCU-LinkA-C3-out | 3D | CN101 (121/135) |
| CCU-LinkA-C4-out | 3E | CN101 (122/135) |
| CCU-LinkA-Y5-out | 4A | CN101 (112/135) |
| CCU-LinkA-Y6-out | 4B | CN101 (113/135) |
| CCU-LinkA-Y7-out | 4C | CN101 (114/135) |
| CCU-LinkA-Y8-out | 4D | CN101 (115/135) |
| CCU-LinkA-Y9-out | 4E | CN101 (116/135) |
| CCU-LinkA-Y0-out | 5A | CN101 (106/135) |
| CCU-LinkA-Y1-out | 5B | CN101 (107/135) |
| CCU-LinkA-Y2-out | 5C | CN101 (108/135) |
| CCU-LinkA-Y3-out | 5D | CN101 (109/135) |
| CCU-LinkA-Y4-out | 5E | CN101 (110/135) |
| | 7A | CN101 (94/135) |
| CHU-F-in | 7B | CN101 (95/135) |
| | 7D | CN101 (97/135) |
| | 7E | CN101 (98/135) |
| Prompter (X)-in | 8A | CN101 (88/135) |
| Prompter (Y)-in | 8B | CN101 (89/135) |
| | 8D | CN101 (91/135) |
| | 8E | CN101 (92/135) |
| | 9A | CN101 (82/135) |
| | 9B | CN101 (83/135) |
| | 9C | CN101 (84/135) |
| | 9D | CN101 (85/135) |
| | 9E | CN101 (86/135) |
| | 10A | CN101 (76/135) |
| | 10B | CN101 (77/135) |
| | 10C | CN101 (78/135) |
| | 10D | CN101 (79/135) |
| | 10E | CN101 (80/135) |
| MST-74W-CLK-A-in | 11A | CN101 (70/135) |
| Guard-Caps | 11B | CN101 (71/135) |
| MST-HD-H-A-in | 11D | CN101 (73/135) |
| MST-HD-F-A-in | 11E | CN101 (74/135) |
| TEMP-Level-out | 15A | CN101 (61/135) |
| SDI/VBS-SEL3-in | 15B | CN101 (62/135) |
| MB-GND | 15C | CN101 (63/135) |
| Frame-Timing-out | 15D | CN101 (64/135) |
| | 15E | CN101 (65/135) |
| SDI/VBS-SEL1-in | 16A | CN101 (55/135) |
| SDI/VBS-SEL2-in | 16B | CN101 (56/135) |
| | 16C | CN101 (57/135) |
| RET-VBS (G)-out | 16D | CN101 (58/135) |
| RET-VBS (X)-out | 16E | CN101 (59/135) |
| -12.5V-in | 17C | CN101 (51/135) |
| RET-VBS2 (G)-out | 17D | CN101 (52/135) |
| RET-VBS2 (X)-out | 17E | CN101 (53/135) |
| | 18C | CN101 (45/135) |
| | 19C | CN101 (39/135) |
| | 19D | CN101 (40/135) |
| | 19E | CN101 (41/135) |
| | 20C | CN101 (33/135) |
| VBS-RET-SEL0-in | 21C | CN101 (27/135) |
| VBS-RET-SEL1-in | 22C | CN101 (21/135) |
| SD-RET-SEL0-in | 22D | CN101 (22/135) |
| SD-RET-SEL1-in | 22E | CN101 (23/135) |
| nc | 25C | CN101 (3/135) |
| nc | 25D | CN101 (4/135) |

| | | |
|---|---|---|
| SHIELD | 1F | CN101 (135/135) |
| SHIELD | 3F | CN101 (123/135) |
| SHIELD | 5F | CN101 (111/135) |
| SHIELD | 7F | CN101 (99/135) |
| SHIELD | 9F | CN101 (87/135) |
| SHIELD | 11F | CN101 (75/135) |
| SHIELD | 13F | CN101 (63/135) |
| SHIELD | 15F | CN101 (66/135) |
| SHIELD | 17F | CN101 (54/135) |
| SHIELD | 19F | CN101 (42/135) |
| SHIELD | 21F | CN101 (30/135) |
| SHIELD | 23F | CN101 (18/135) |
| SHIELD | 25F | CN101 (6/135) |

| | | |
|---|---|---|
| 144 | 1A | CN101 (129/135) |
| 132 | 1B | CN101 (117/135) |
| 120 | 1C | CN101 (105/135) |
| 108 | 1D | CN101 (93/135) |
| 96 | 1E | CN101 (81/135) |
| 84 | 2A | CN101 (69/135) |
| 72 | 2B | CN101 (57/135) |
| 60 | 2C | CN101 (45/135) |
| 48 | 2D | CN101 (33/135) |
| 36 | 2E | CN101 (21/135) |
| 24 | 3A | CN101 (9/135) |
| 12 | 3B | CN101 (12/135) |

**SDI-85**
BOARD NO. 1-867-883-11
HDCU1000_SDI-85_011_1

HDCU3300/MM (J,E)

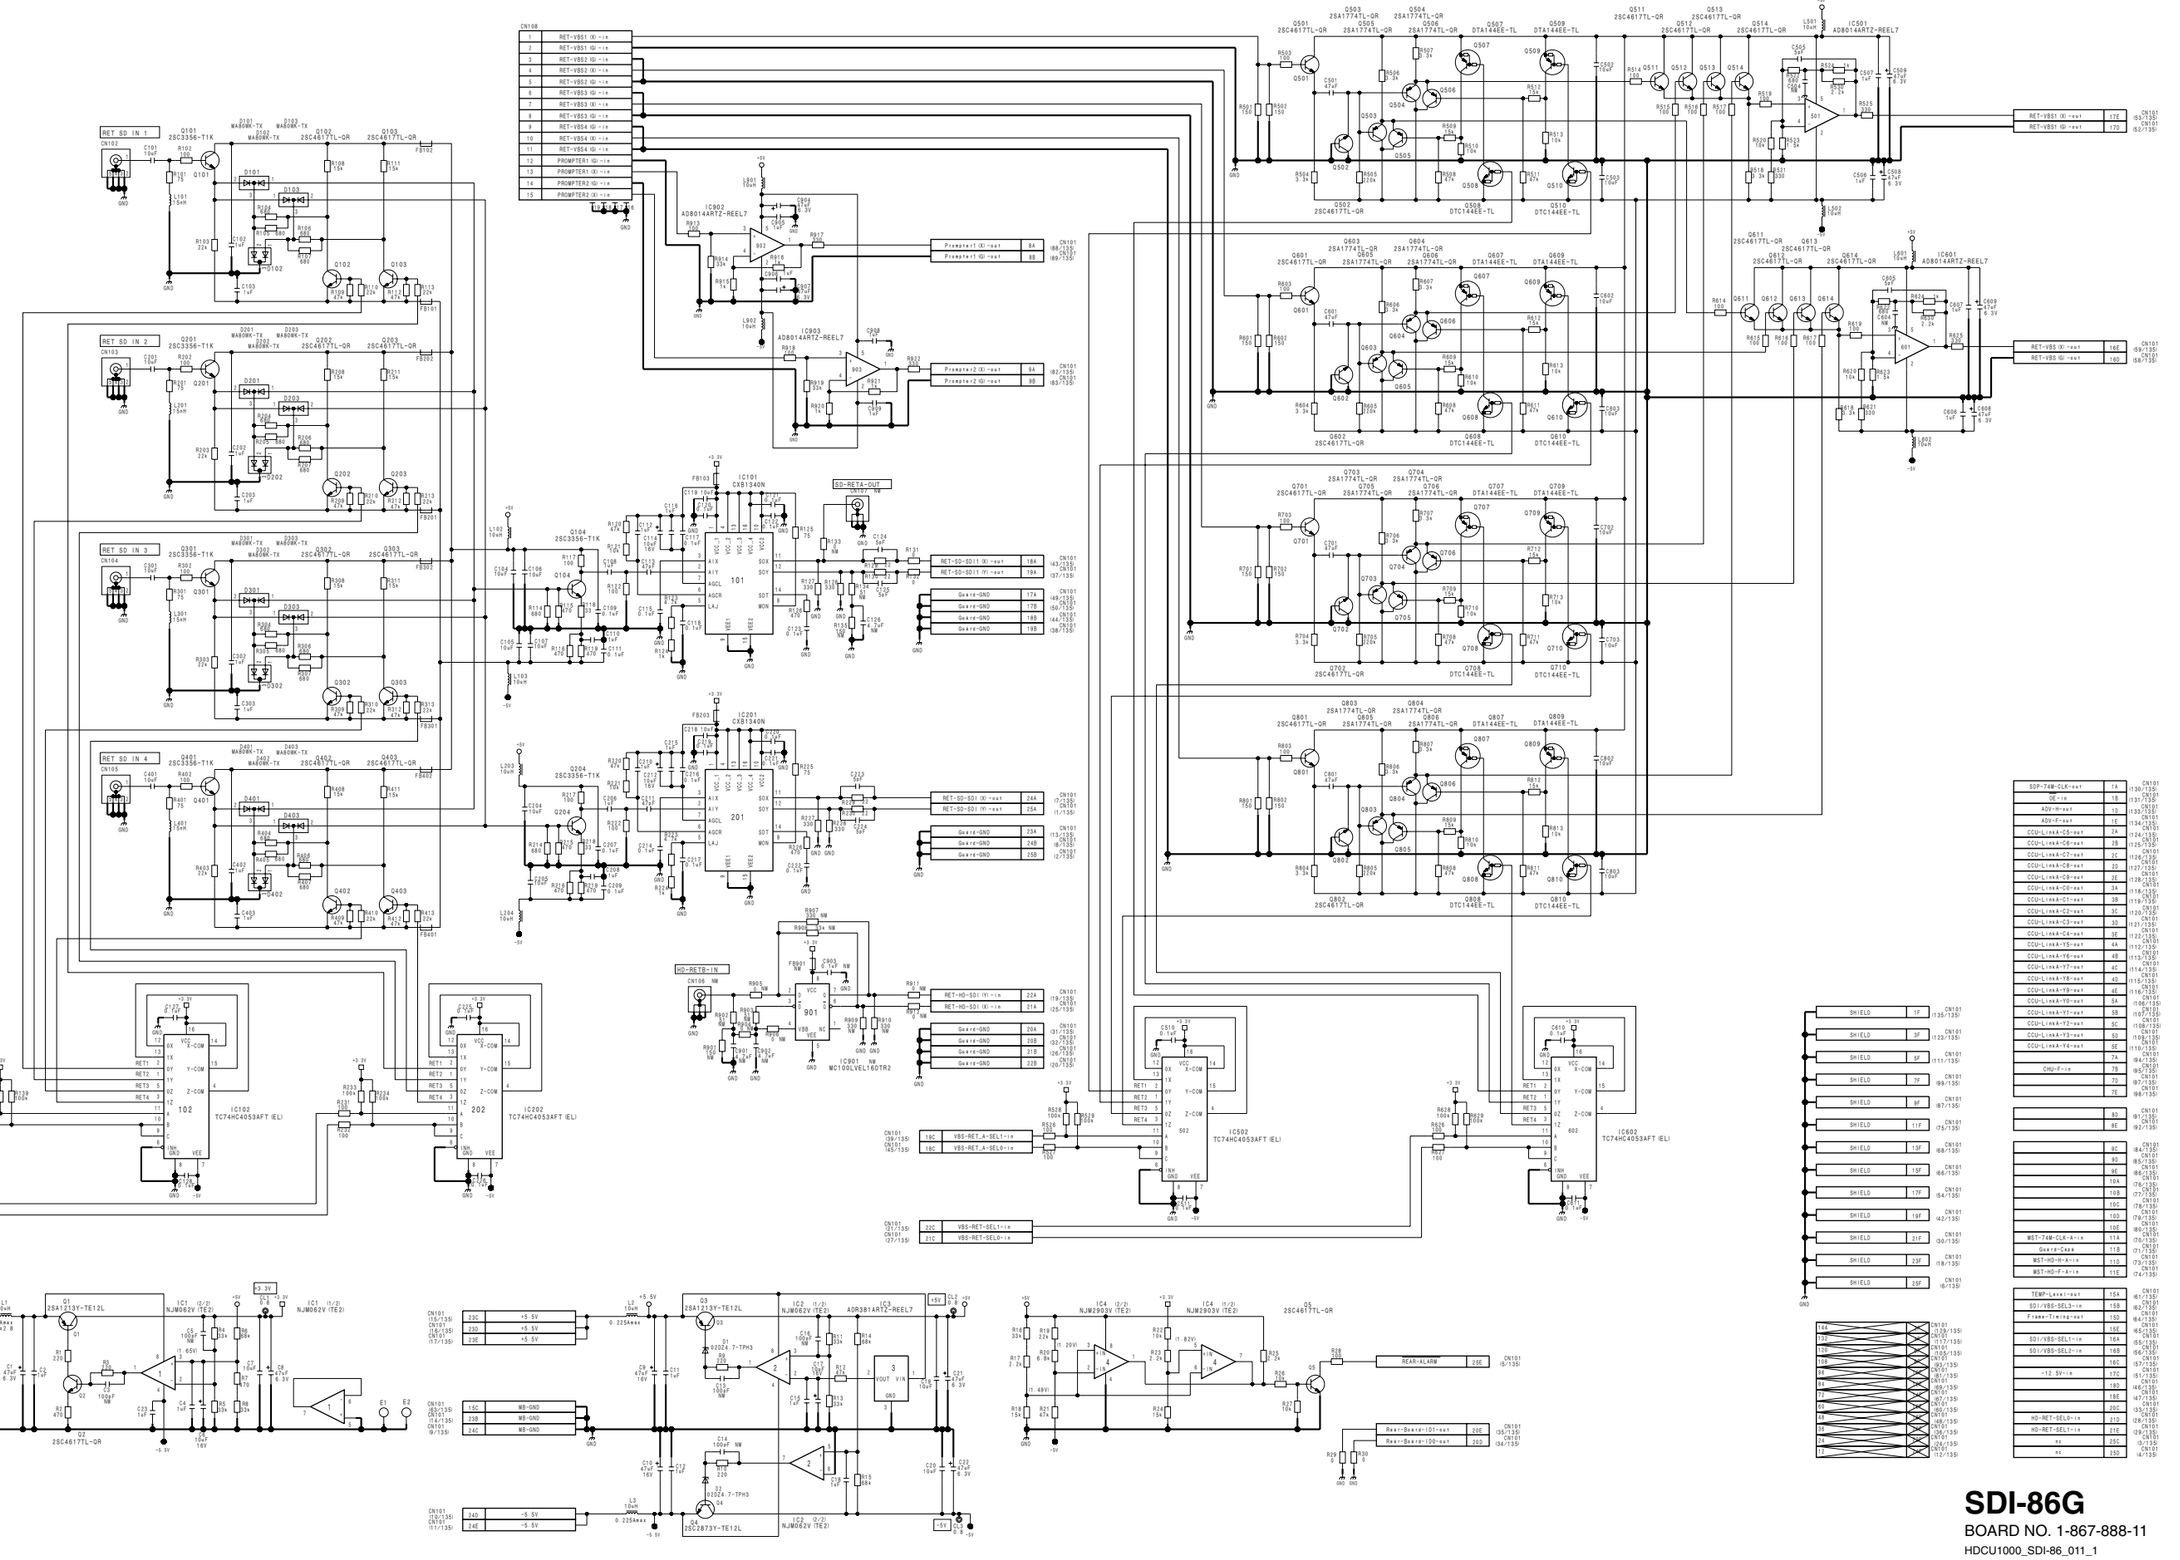


**SDI-86G**
BOARD NO. 1-867-888-11
HDCU1000_SDI-86_011_1

**SDP-15 (1/4)**
**SUFFIX: -11**

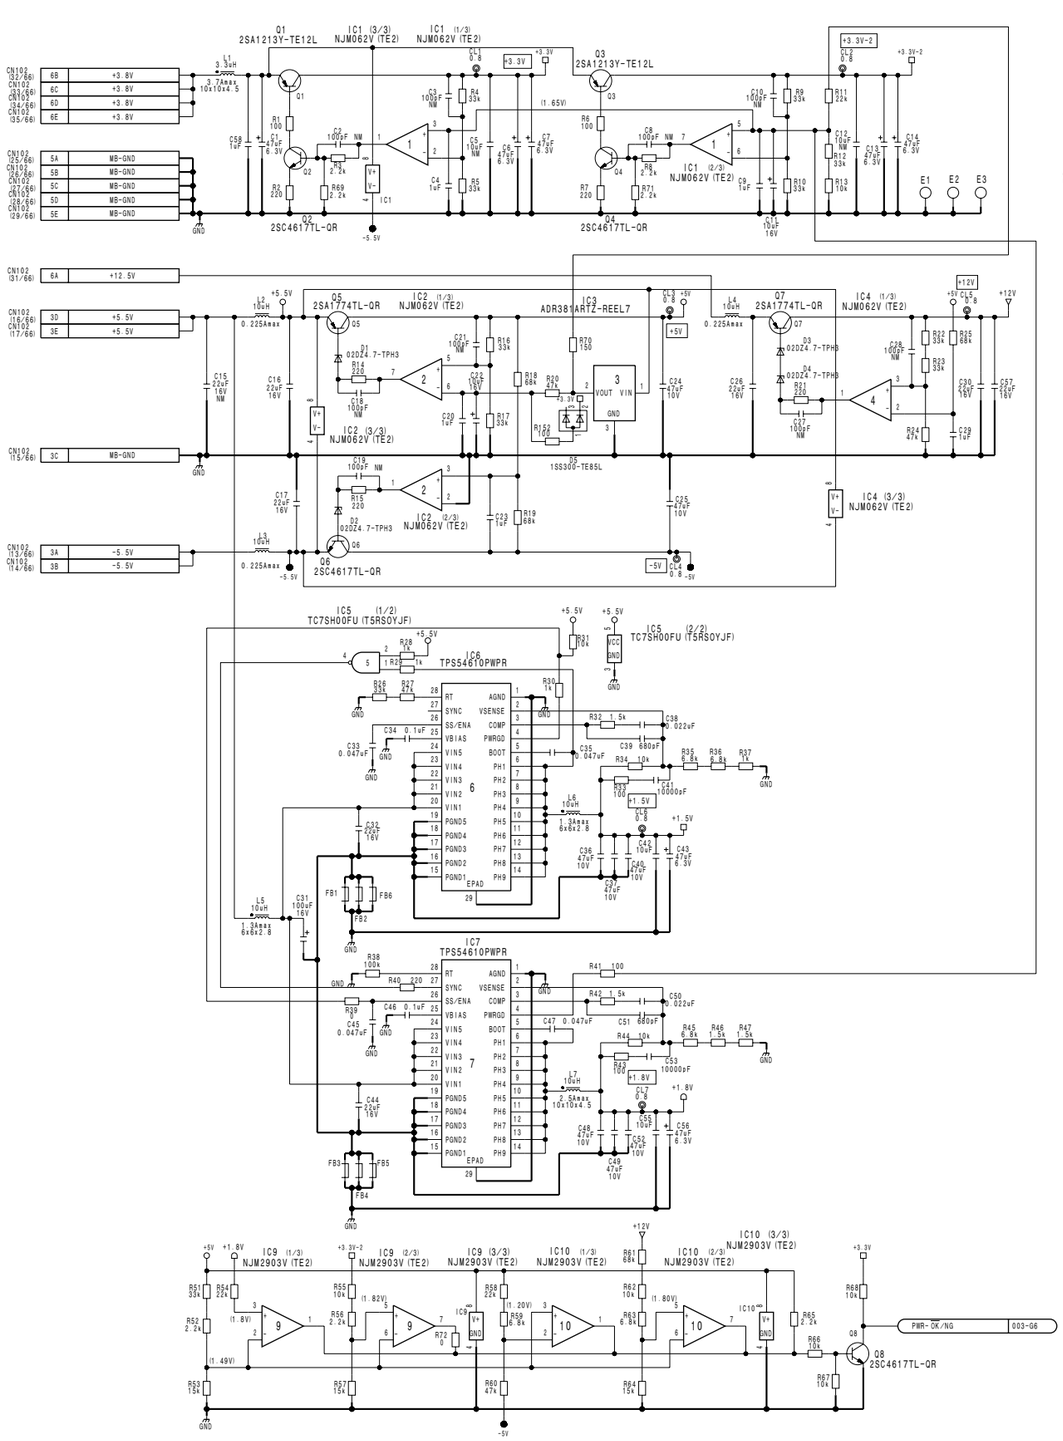


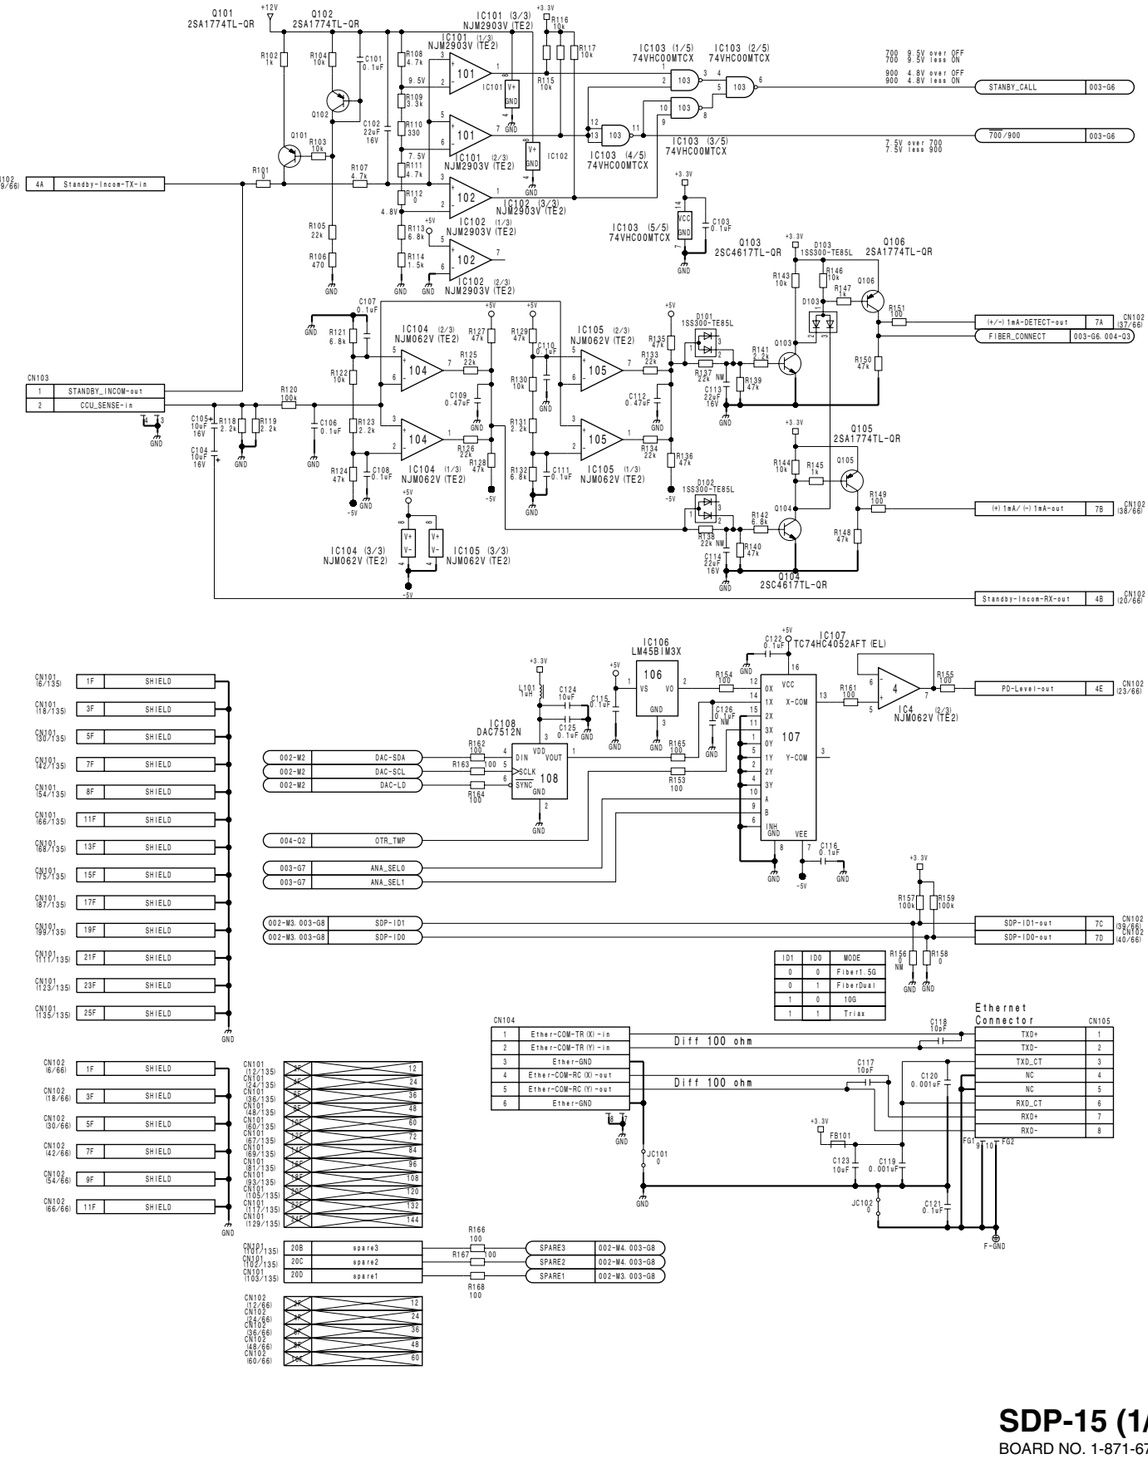





**SDP-15 (1/4)**
BOARD NO. 1-871-676-11
HDCU3300_SDP-15_011_1

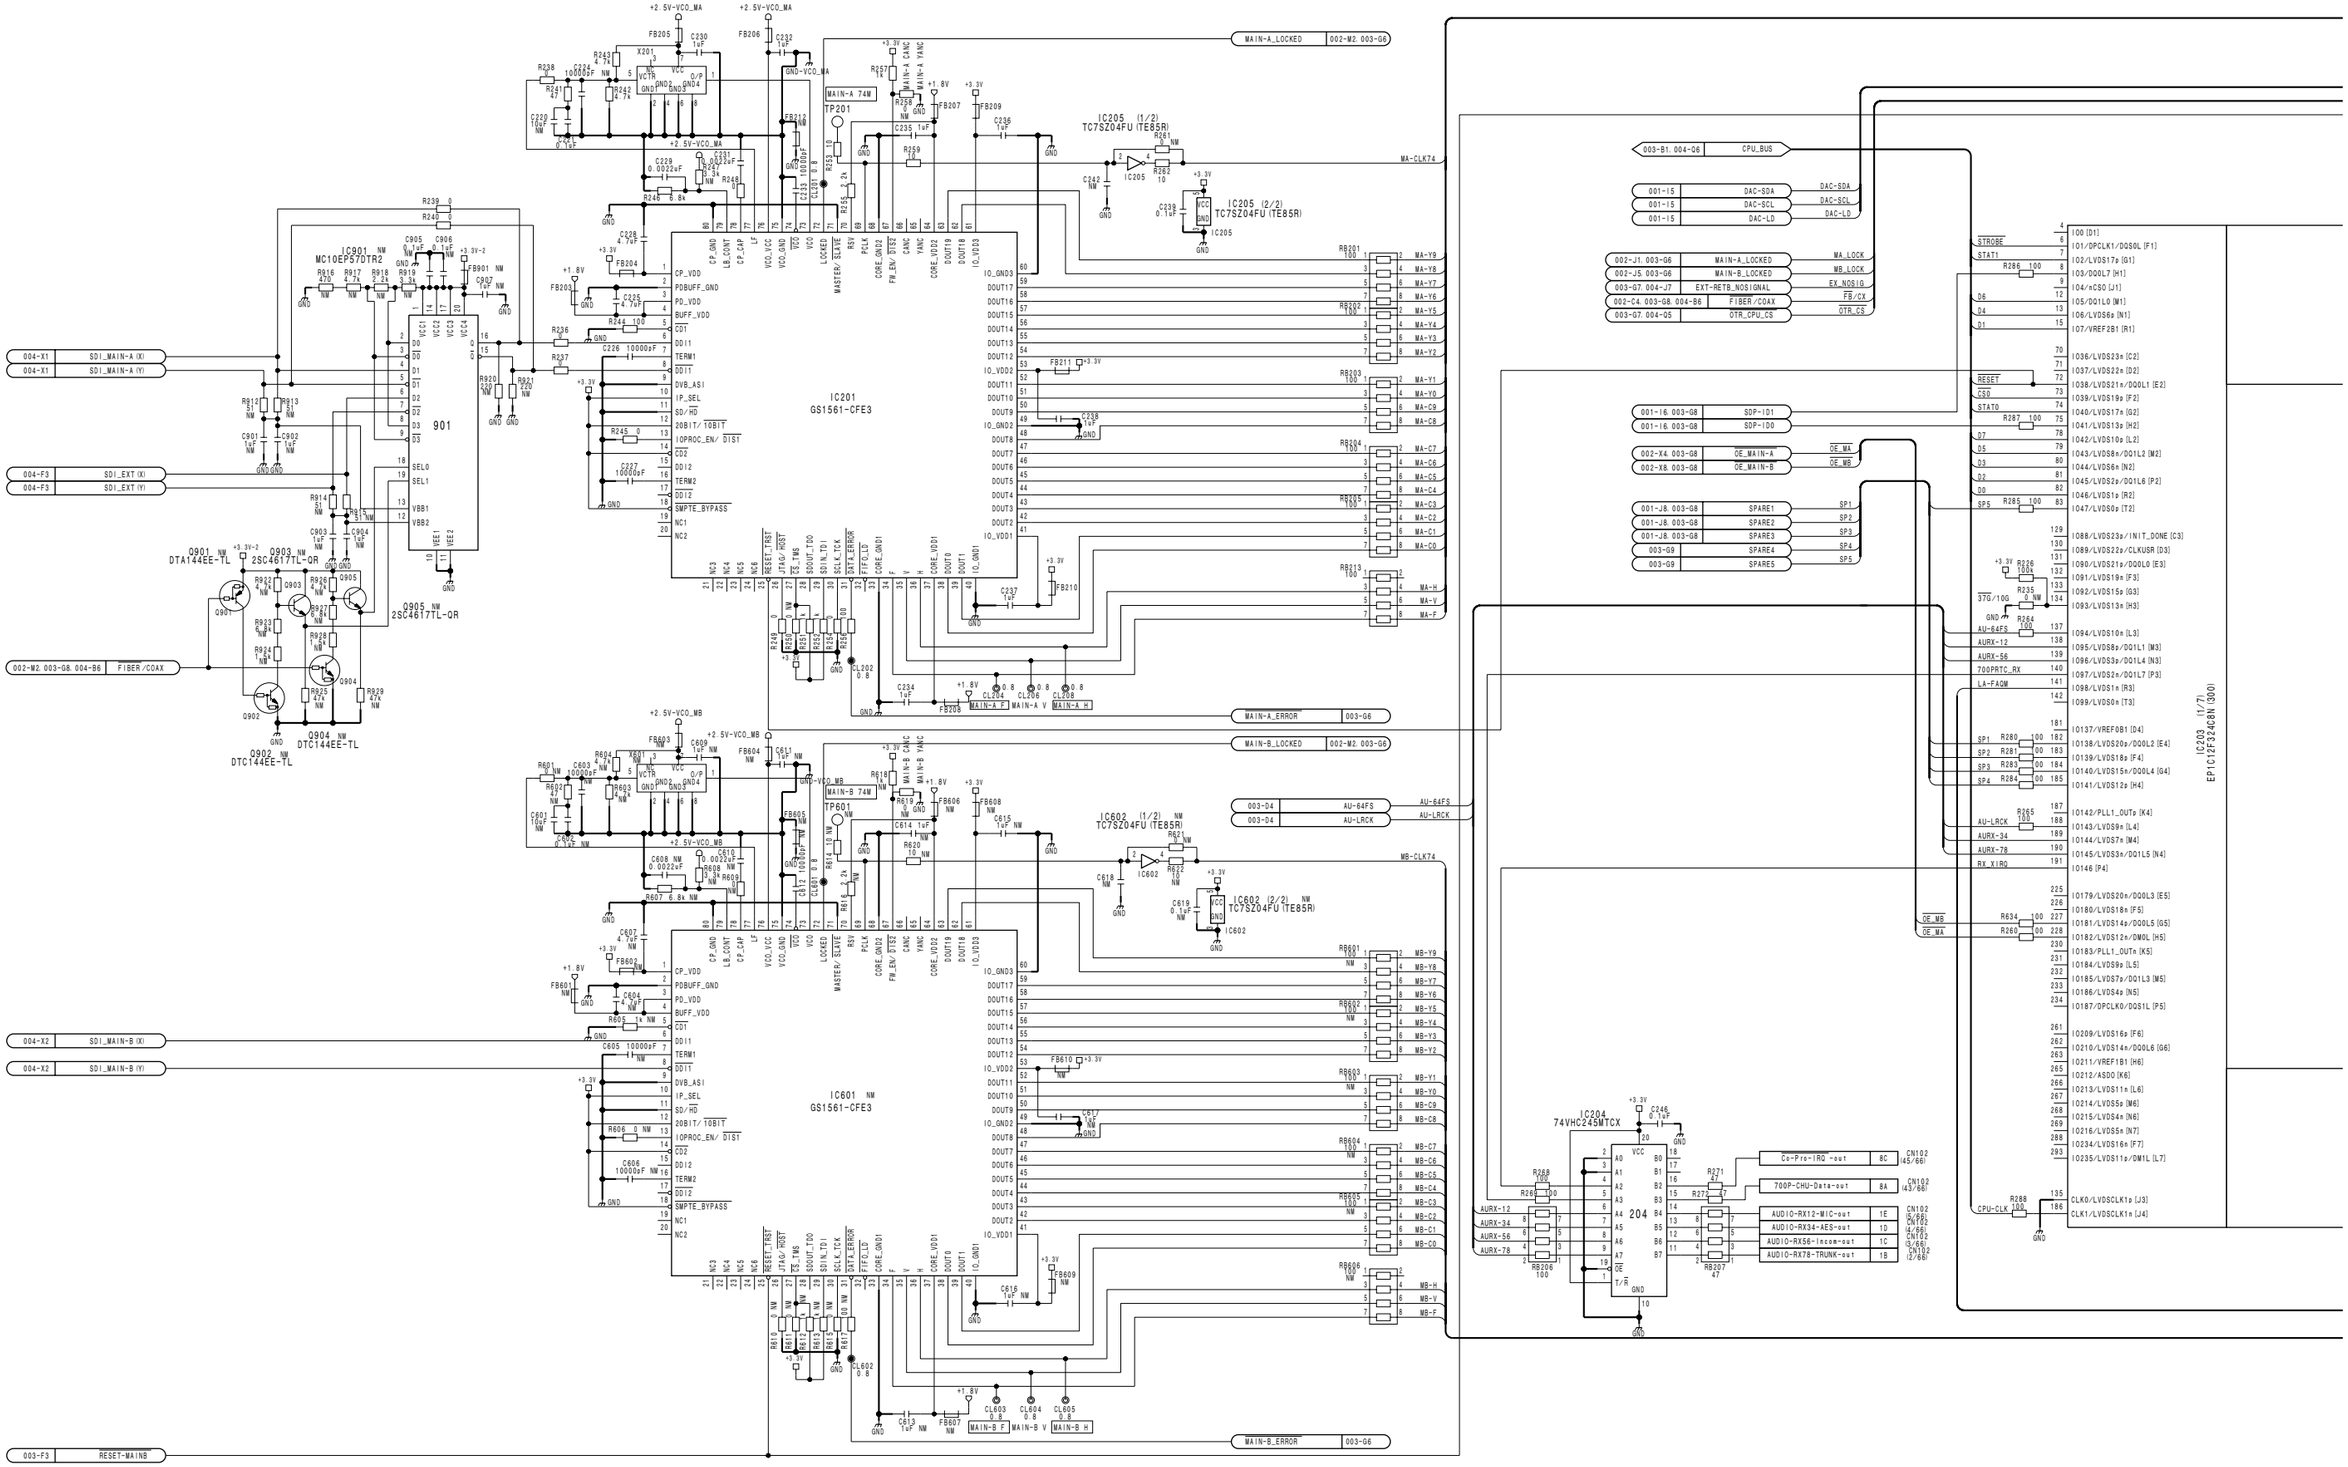
IC201
GS1561-CFE3
IC601 NM
GS1561-CFE3
IC205 (1/2)
TC7SZ04FU (TE85R)
IC205 (2/2)
TC7SZ04FU (TE85R)
IC602 (1/2) NM
TC7SZ04FU (TE85R)
IC602 (2/2) NM
TC7SZ04FU (TE85R)
IC204
74VHC245MTCX
IC209 (1/7)
EP1C12F324C8N (90)
MAIN-A_LOCKED
002-M2. 003-G6
MAIN-B_LOCKED
002-M2. 003-G6
MAIN-A_ERROR
003-G6
MAIN-B_ERROR
003-G6
CPU_BUS
003-B1. 004-G6
DAC-SDA
DAC-SCL
DAC-LD
MA_LOCK
MB_LOCK
EX_NOSIG
FB/CX
OTR_CS
OE_MA
OE_MB
SDP-ID1
SDP-ID0
SPARE1
SPARE2
SPARE3
SPARE4
SPARE5
AU-64FS
AU-LRCK
MA-CLK74
MB-CLK74
SDI_MAIN-A (X)
SDI_MAIN-A (Y)
SDI_MAIN-B (X)
SDI_MAIN-B (Y)
SDI_EXT (X)
SDI_EXT (Y)
FIBER/COAX
RESET-MAINB
Co-Pro-IRQ -out
700P-CHU-Data-out
AUDIO-RX12-MIC-out
AUDIO-RX34-AES-out
AUDIO-RX56-Iscom-out
AUDIO-RX78-TRUNK-out
AURX-12
AURX-34
AURX-56
AURX-78
RX_XIRQ
CPU-CLK
AU-64FS
AURX-12
AURX-34
AURX-56
700PRTC_RX
LA-FAQM
RX_XIRQ

**SDP-15 (2/4)**
**SUFFIX: -11**

# COMMAND DEMUX

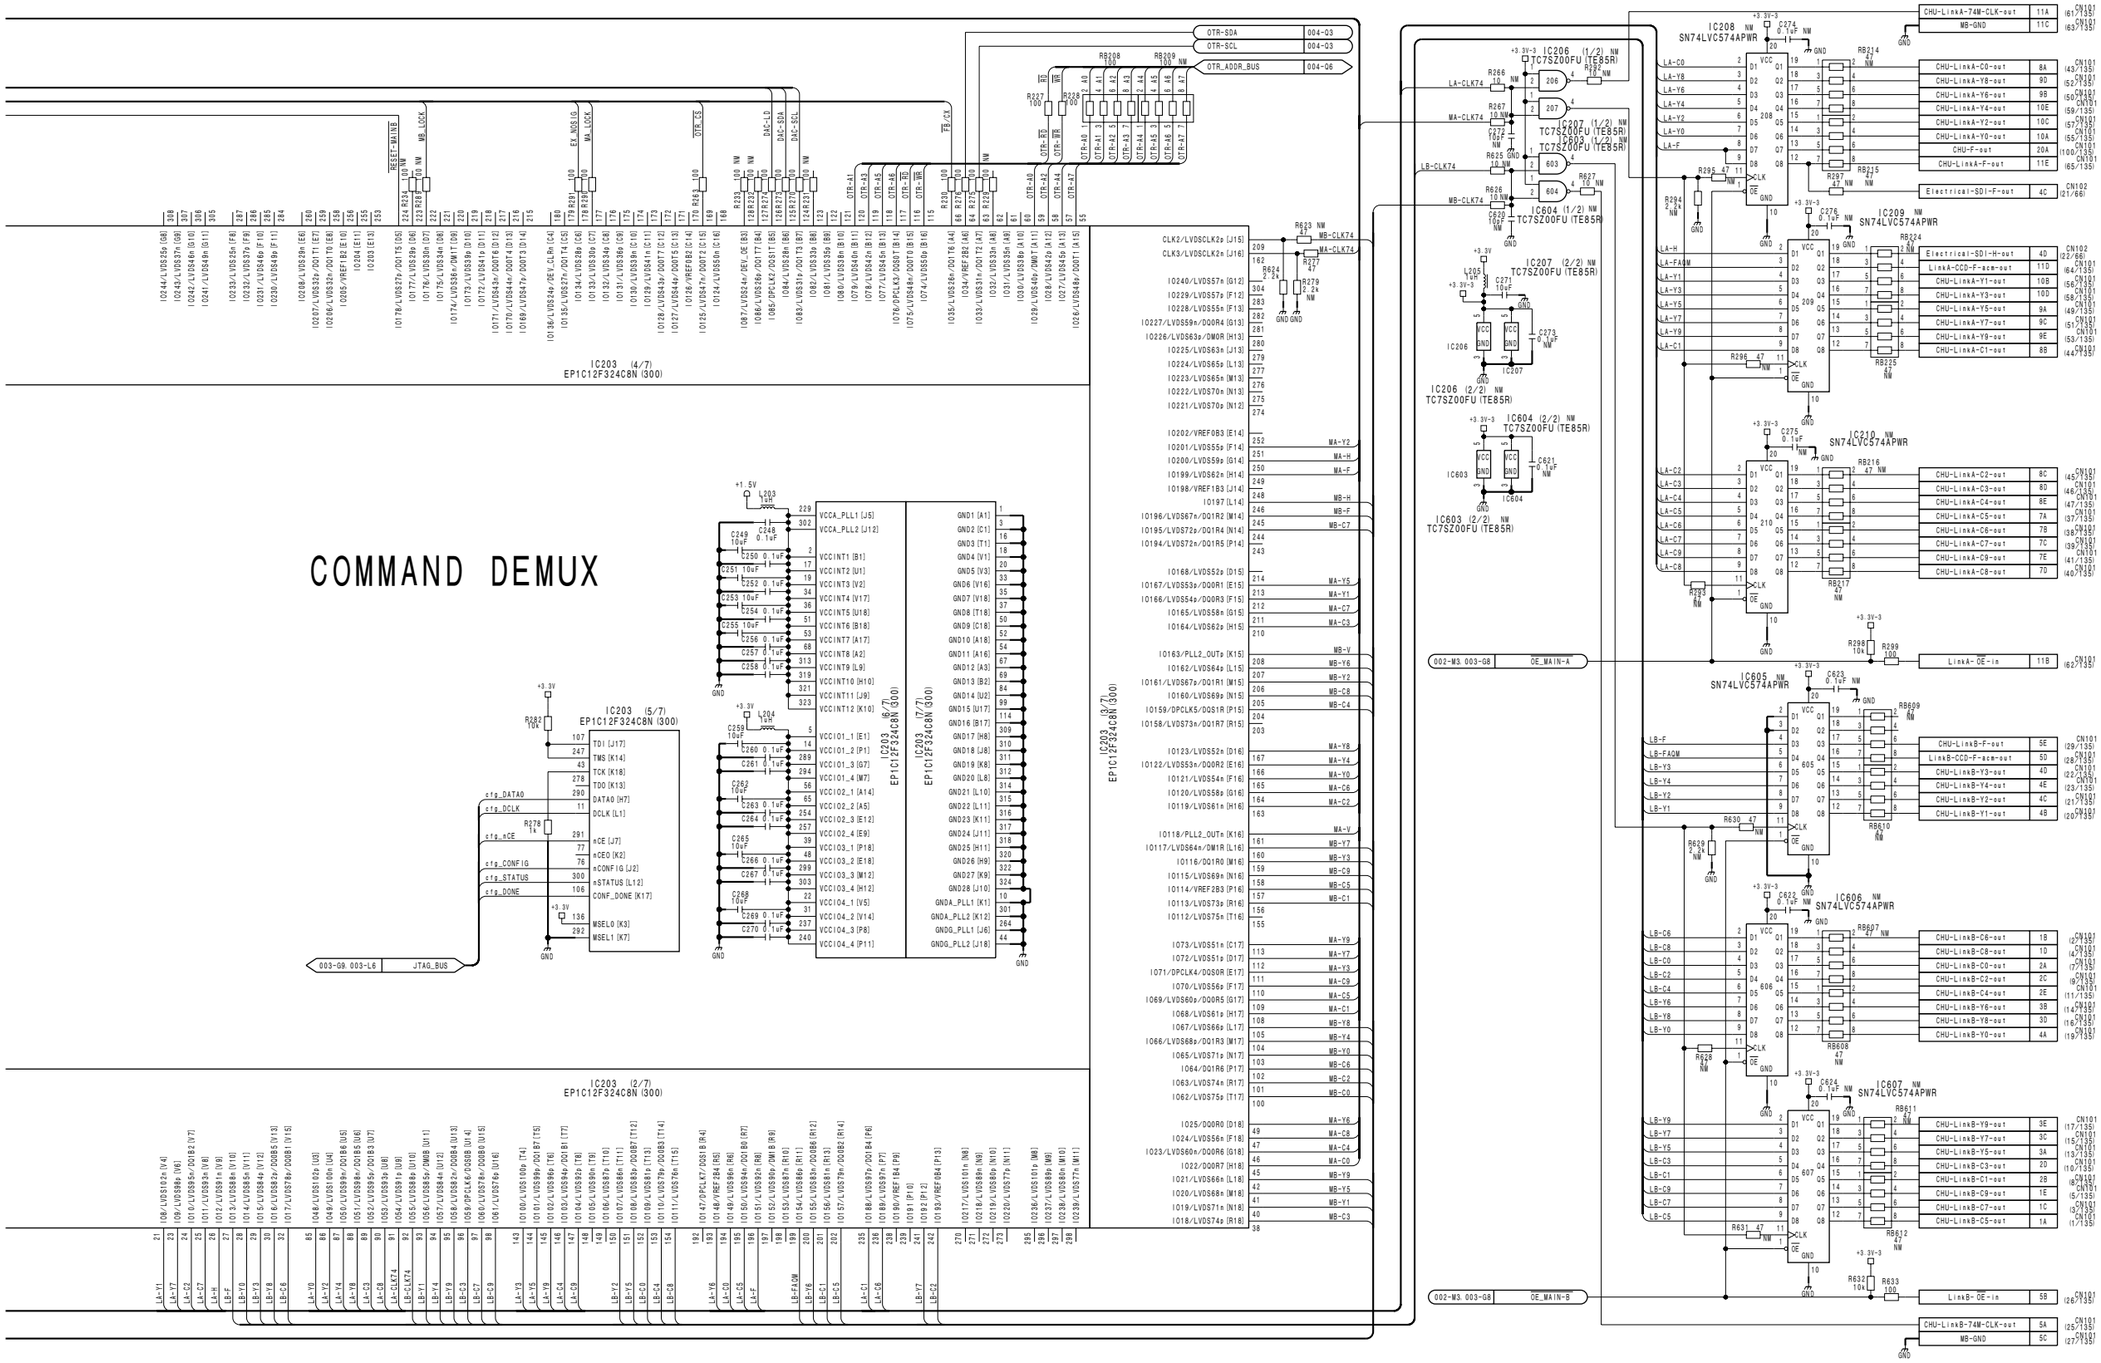


**SDP-15 (2/4)**
BOARD NO. 1-871-676-11
HDCU3300_SDP-15_011_2

# COMMAND MUX

# EPR

SDP-15 (3/4)
SUFFIX: -11

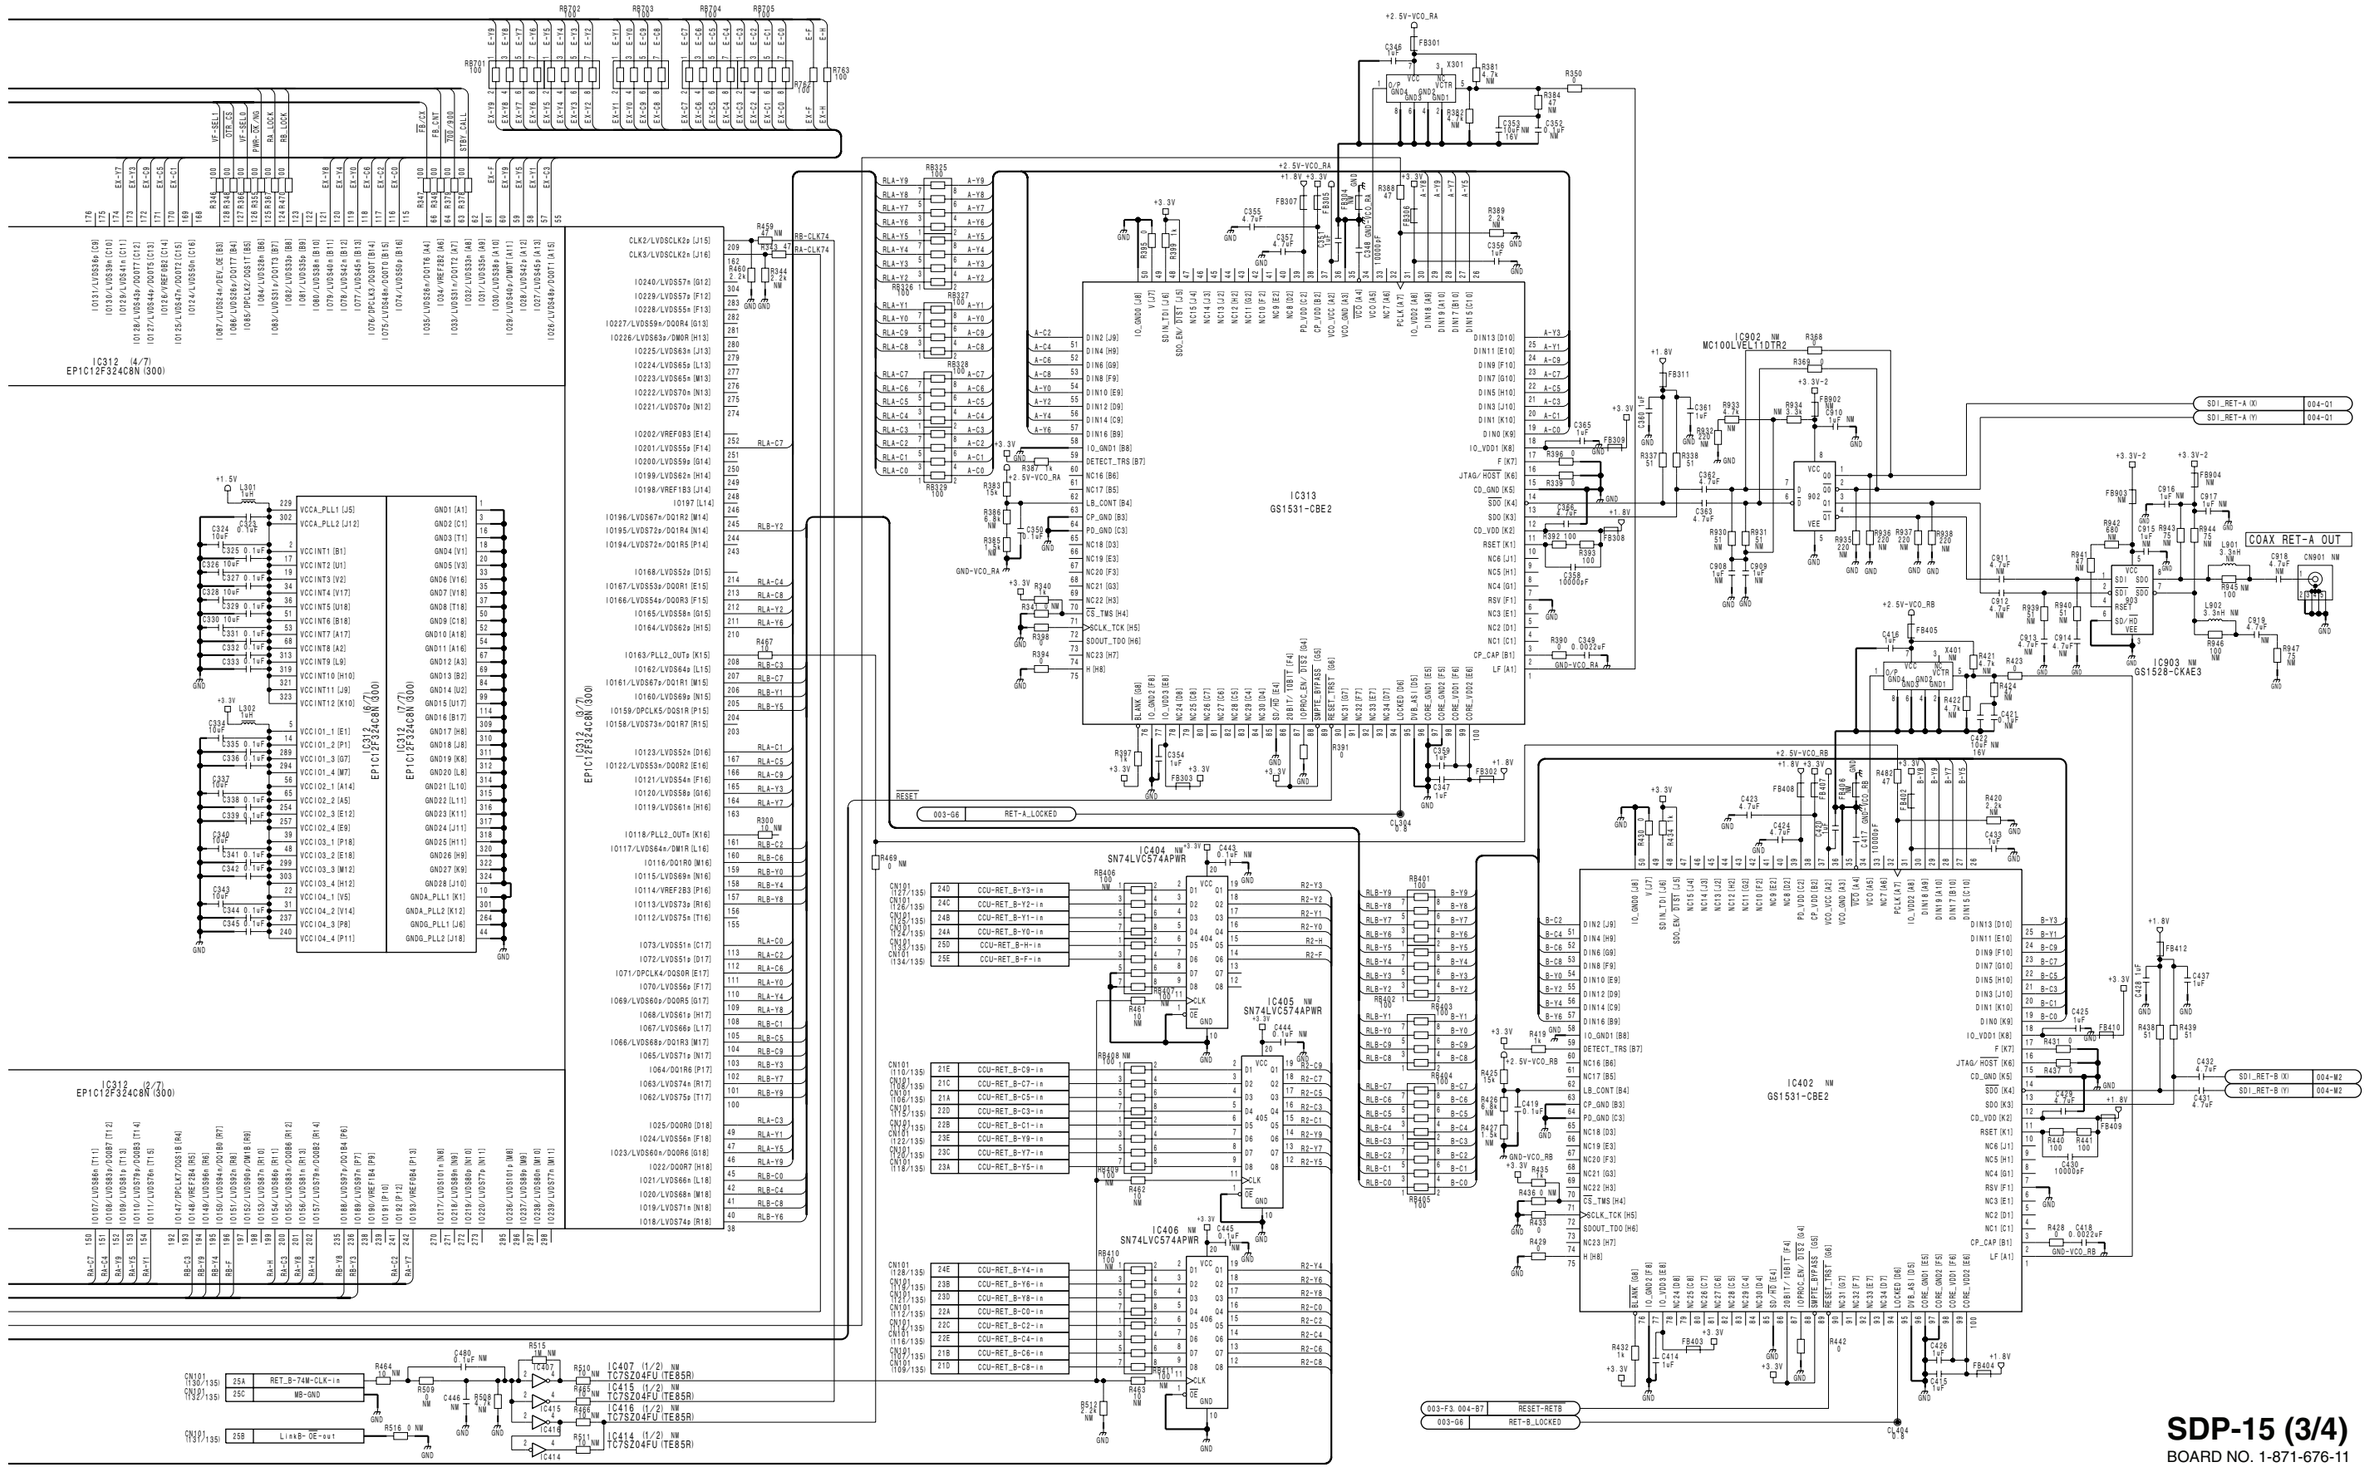




**SDP-15 (3/4)**
BOARD NO. 1-871-676-11
HDCU3300_SDP-15_011_3

**SDP-15 (4/4)** **SUFFIX: -11**

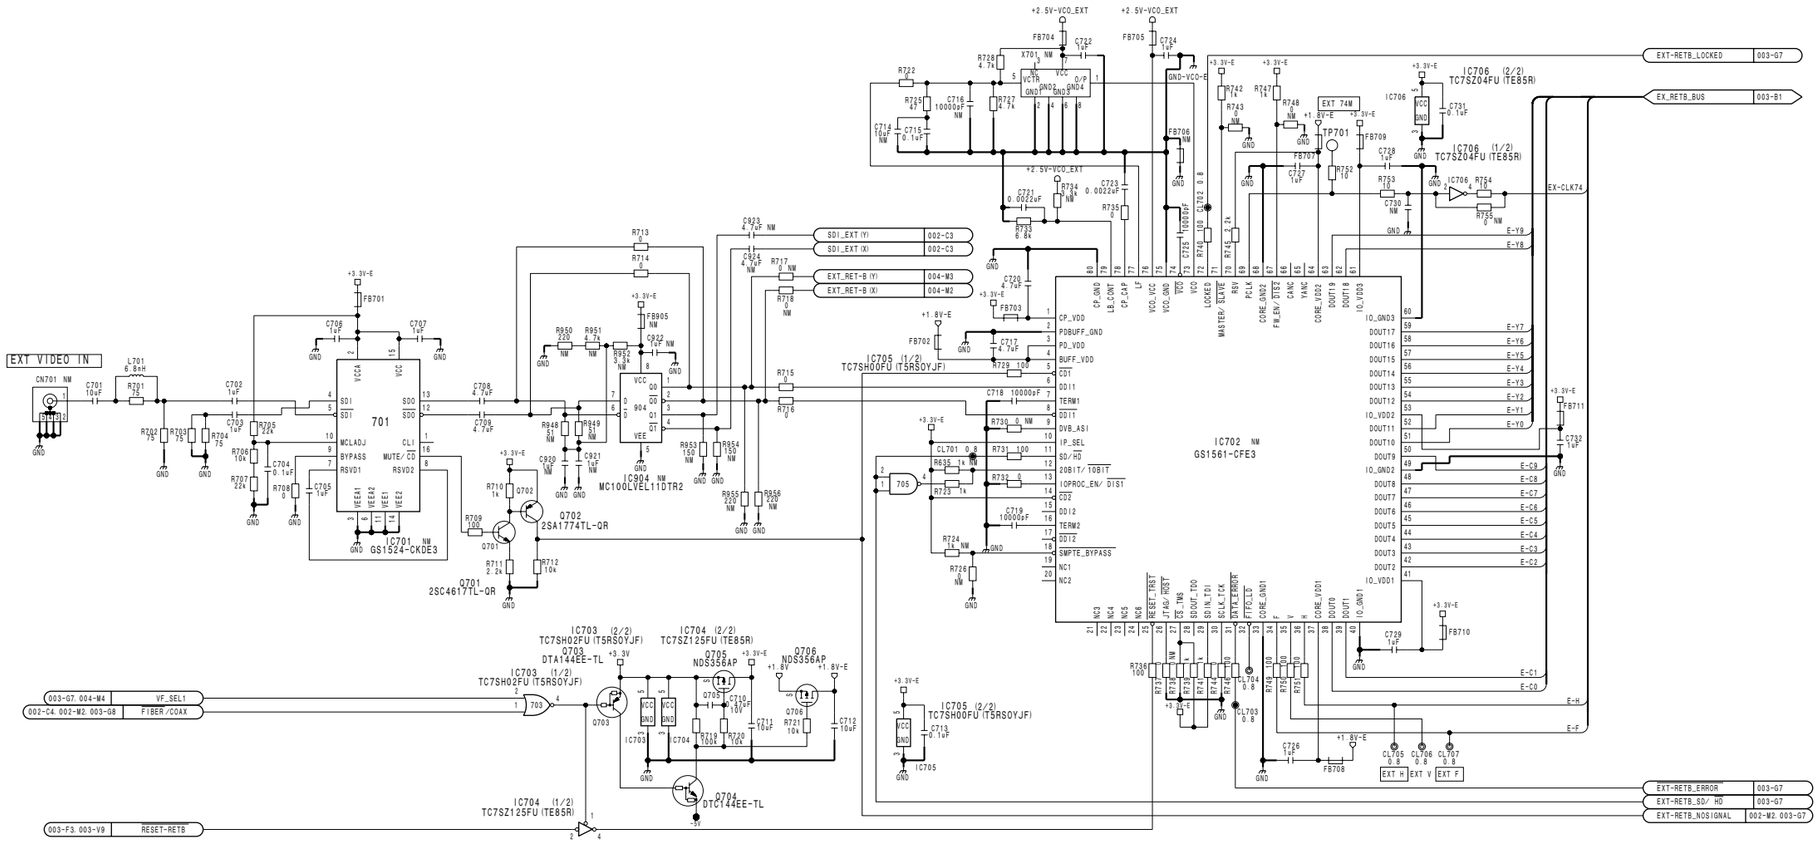

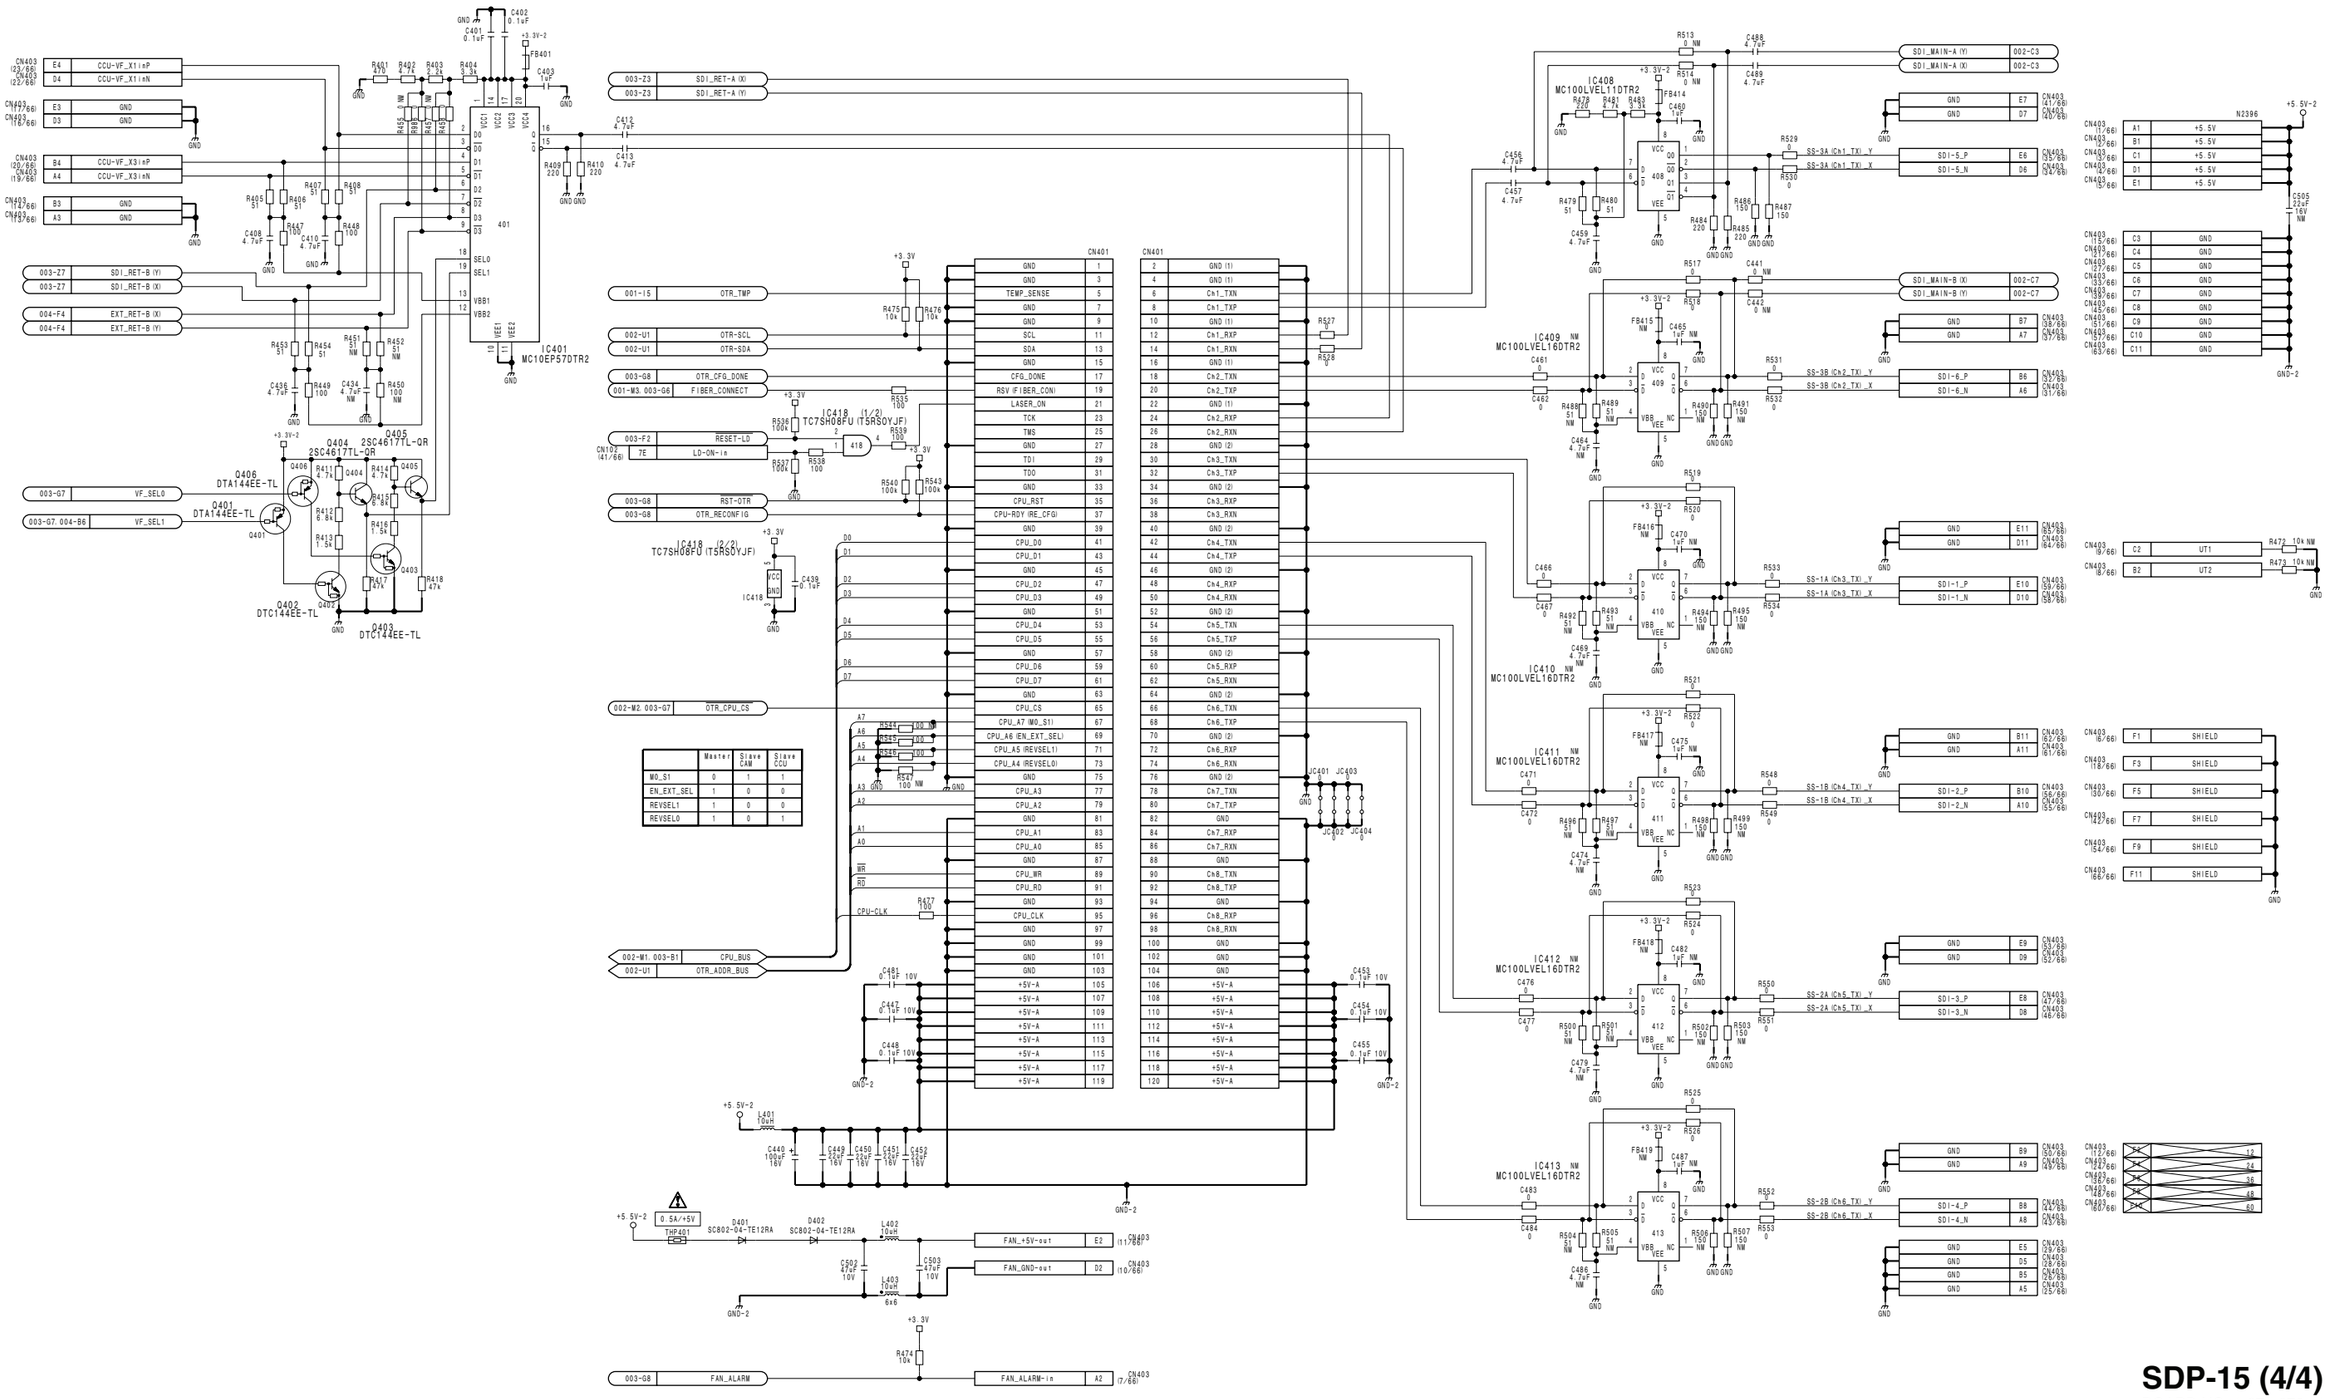


| | Master | Slave CAM | Slave CCU |
|---|---|---|---|
| MO_S1 | 0 | 1 | 1 |
| EN_EXT_SEL | 1 | 0 | 0 |
| REVSEL1 | 1 | 0 | 0 |
| REVSEL0 | 1 | 0 | 1 |

**SDP-15 (4/4)**
BOARD NO. 1-871-676-11
HDCU3300_SDP-15_011_4

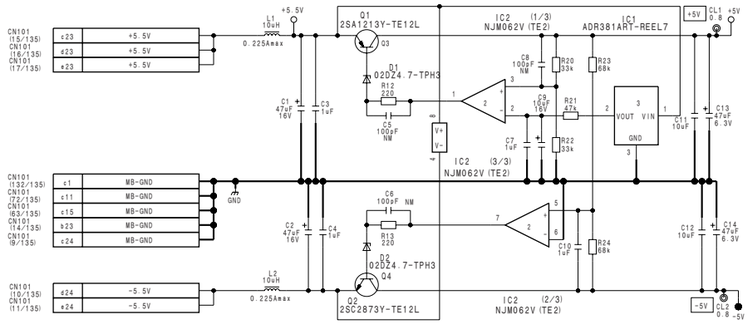


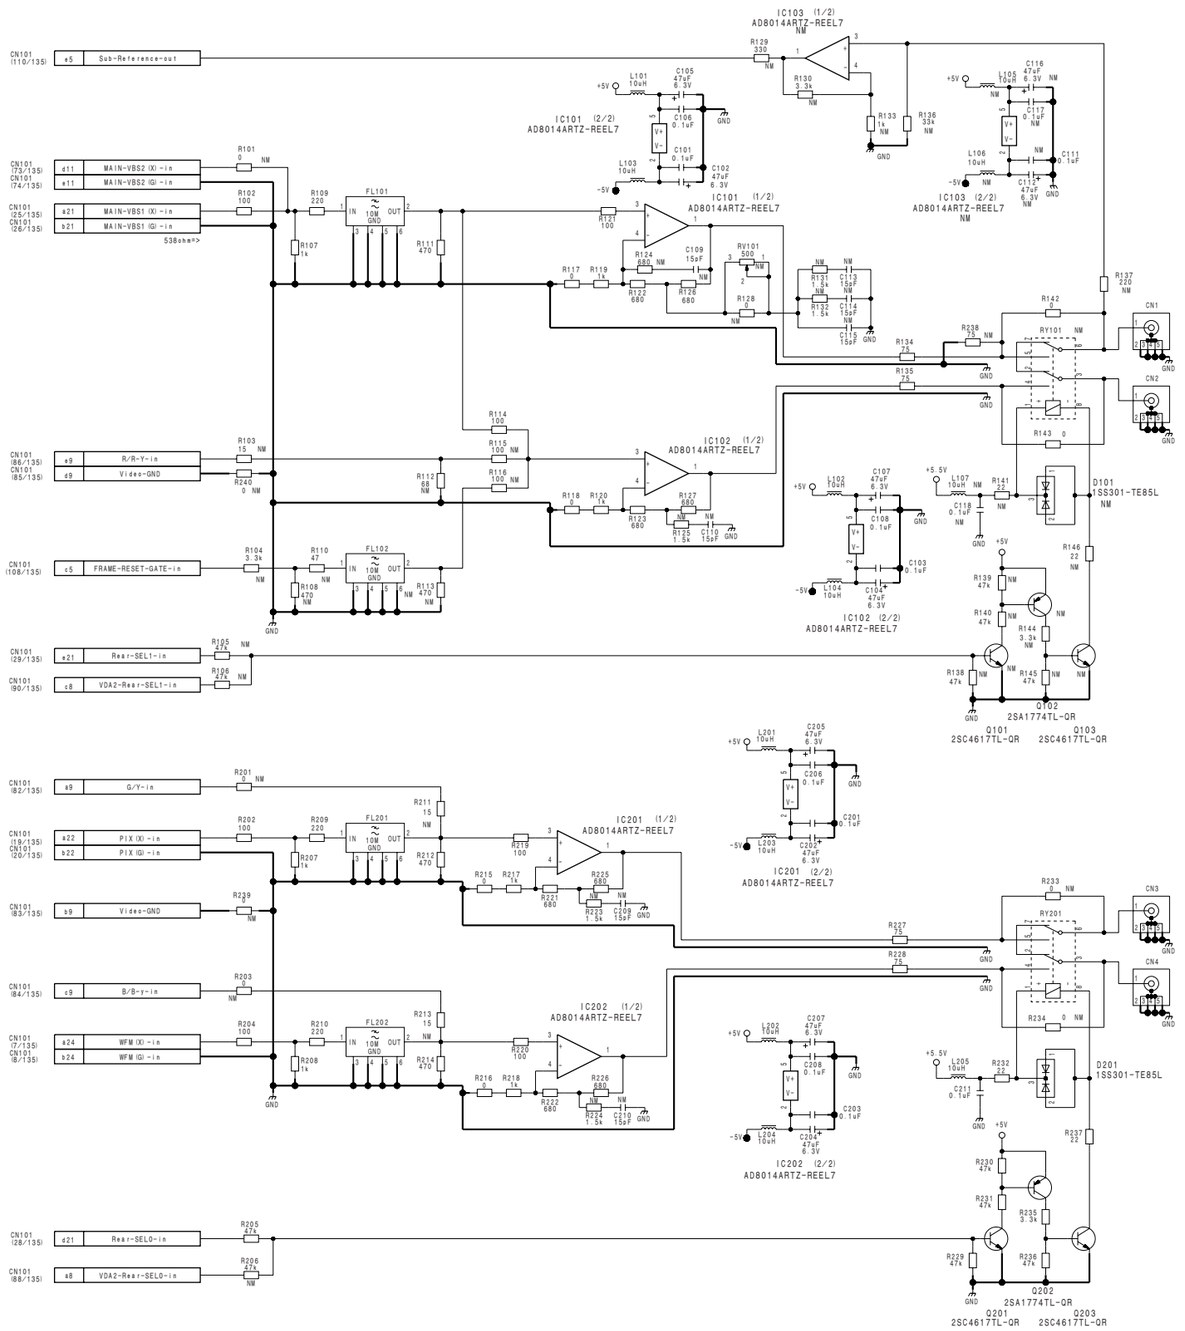


**VDA-64A**
BOARD NO. 1-868-003-12
HKCU1001_VDA-64A_011_1

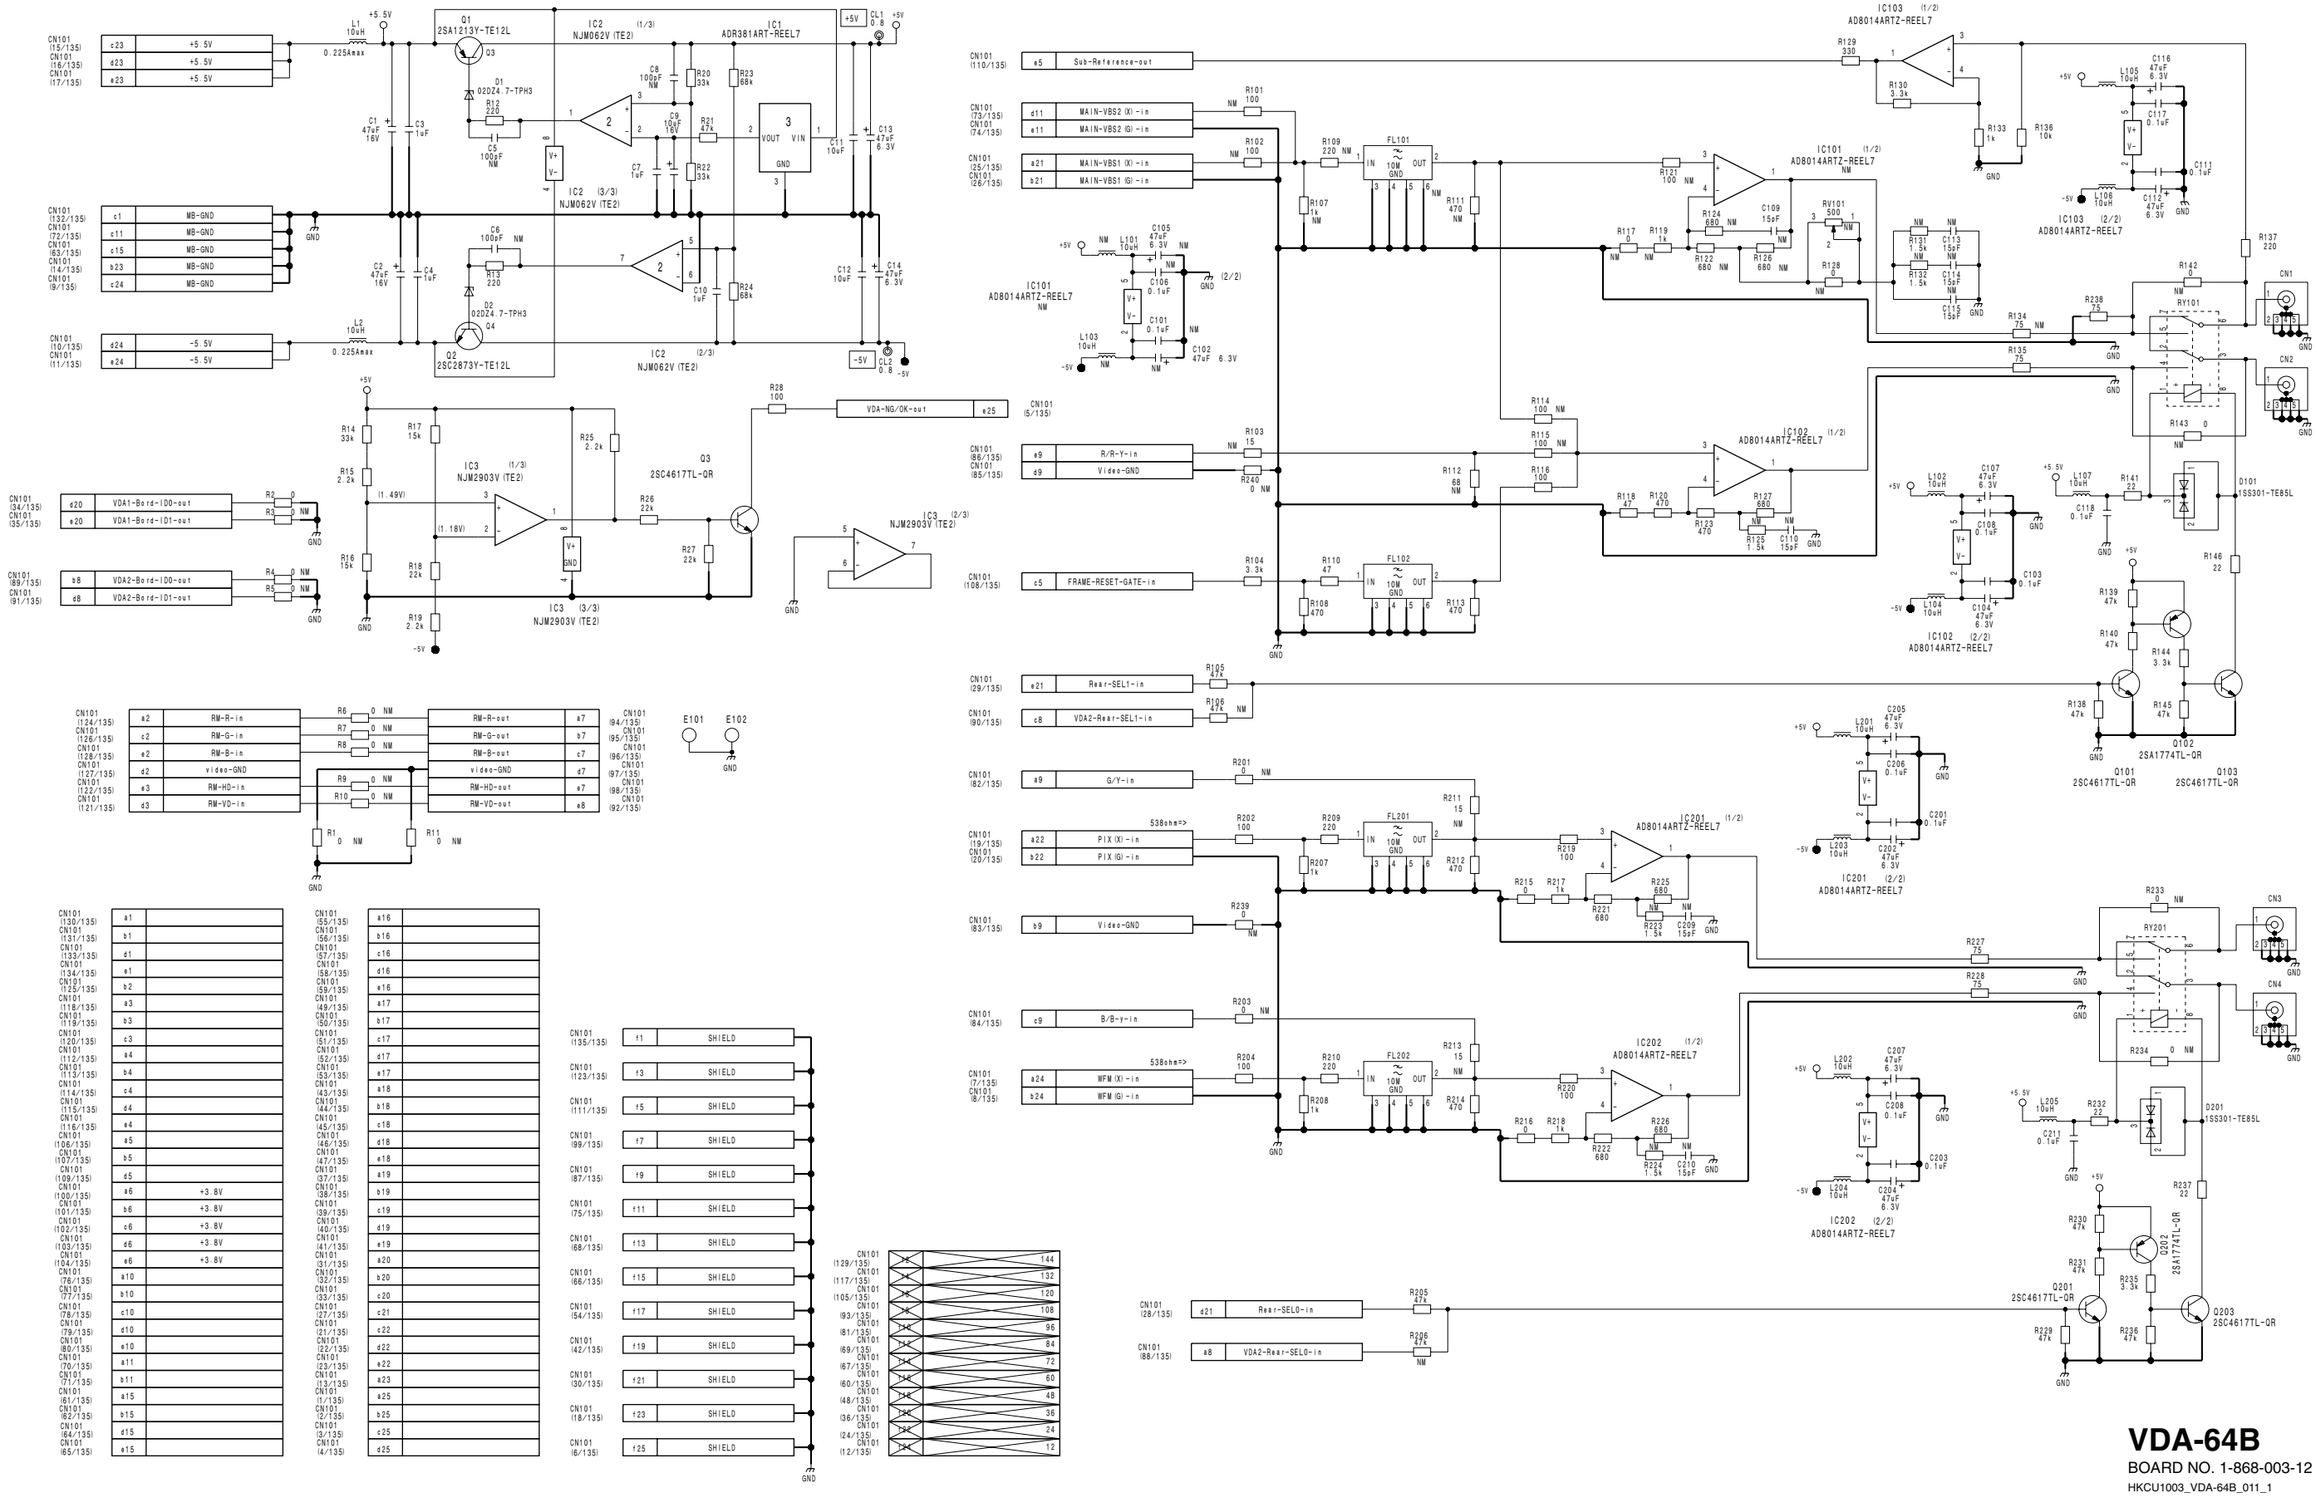


**VDA-64B**
BOARD NO. 1-868-003-12
HKCU1003_VDA-64B_011_1

# VIF-34G (1/3)
**SUFFIX: -11**

VIF-34G (1/3)
SUFFIX: -11

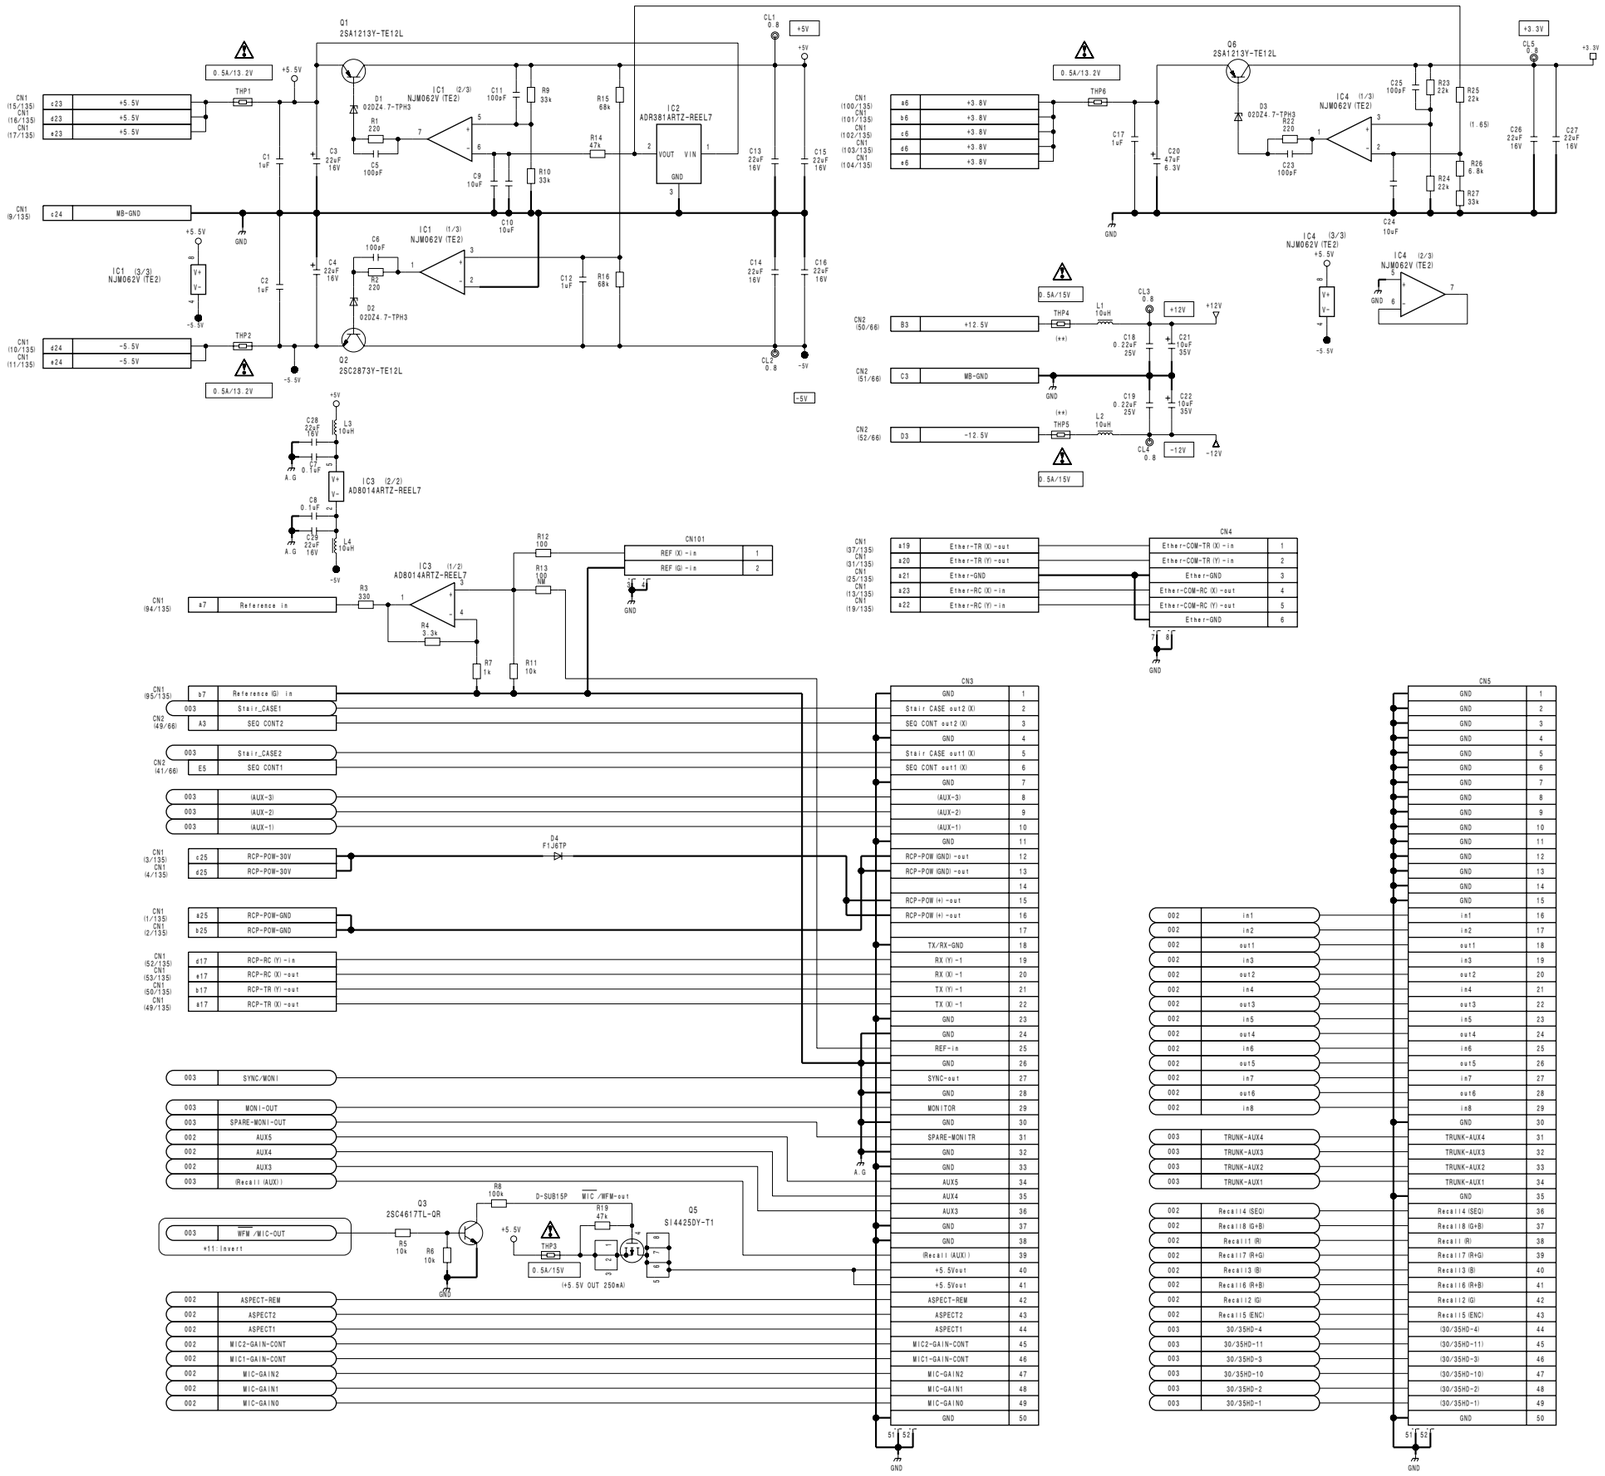


# VIF-34G (1/3)
BOARD NO. 1-867-885-11
HDCU1000_VIF-34_011_1

VIF-34G (2/3)
SUFFIX: -11

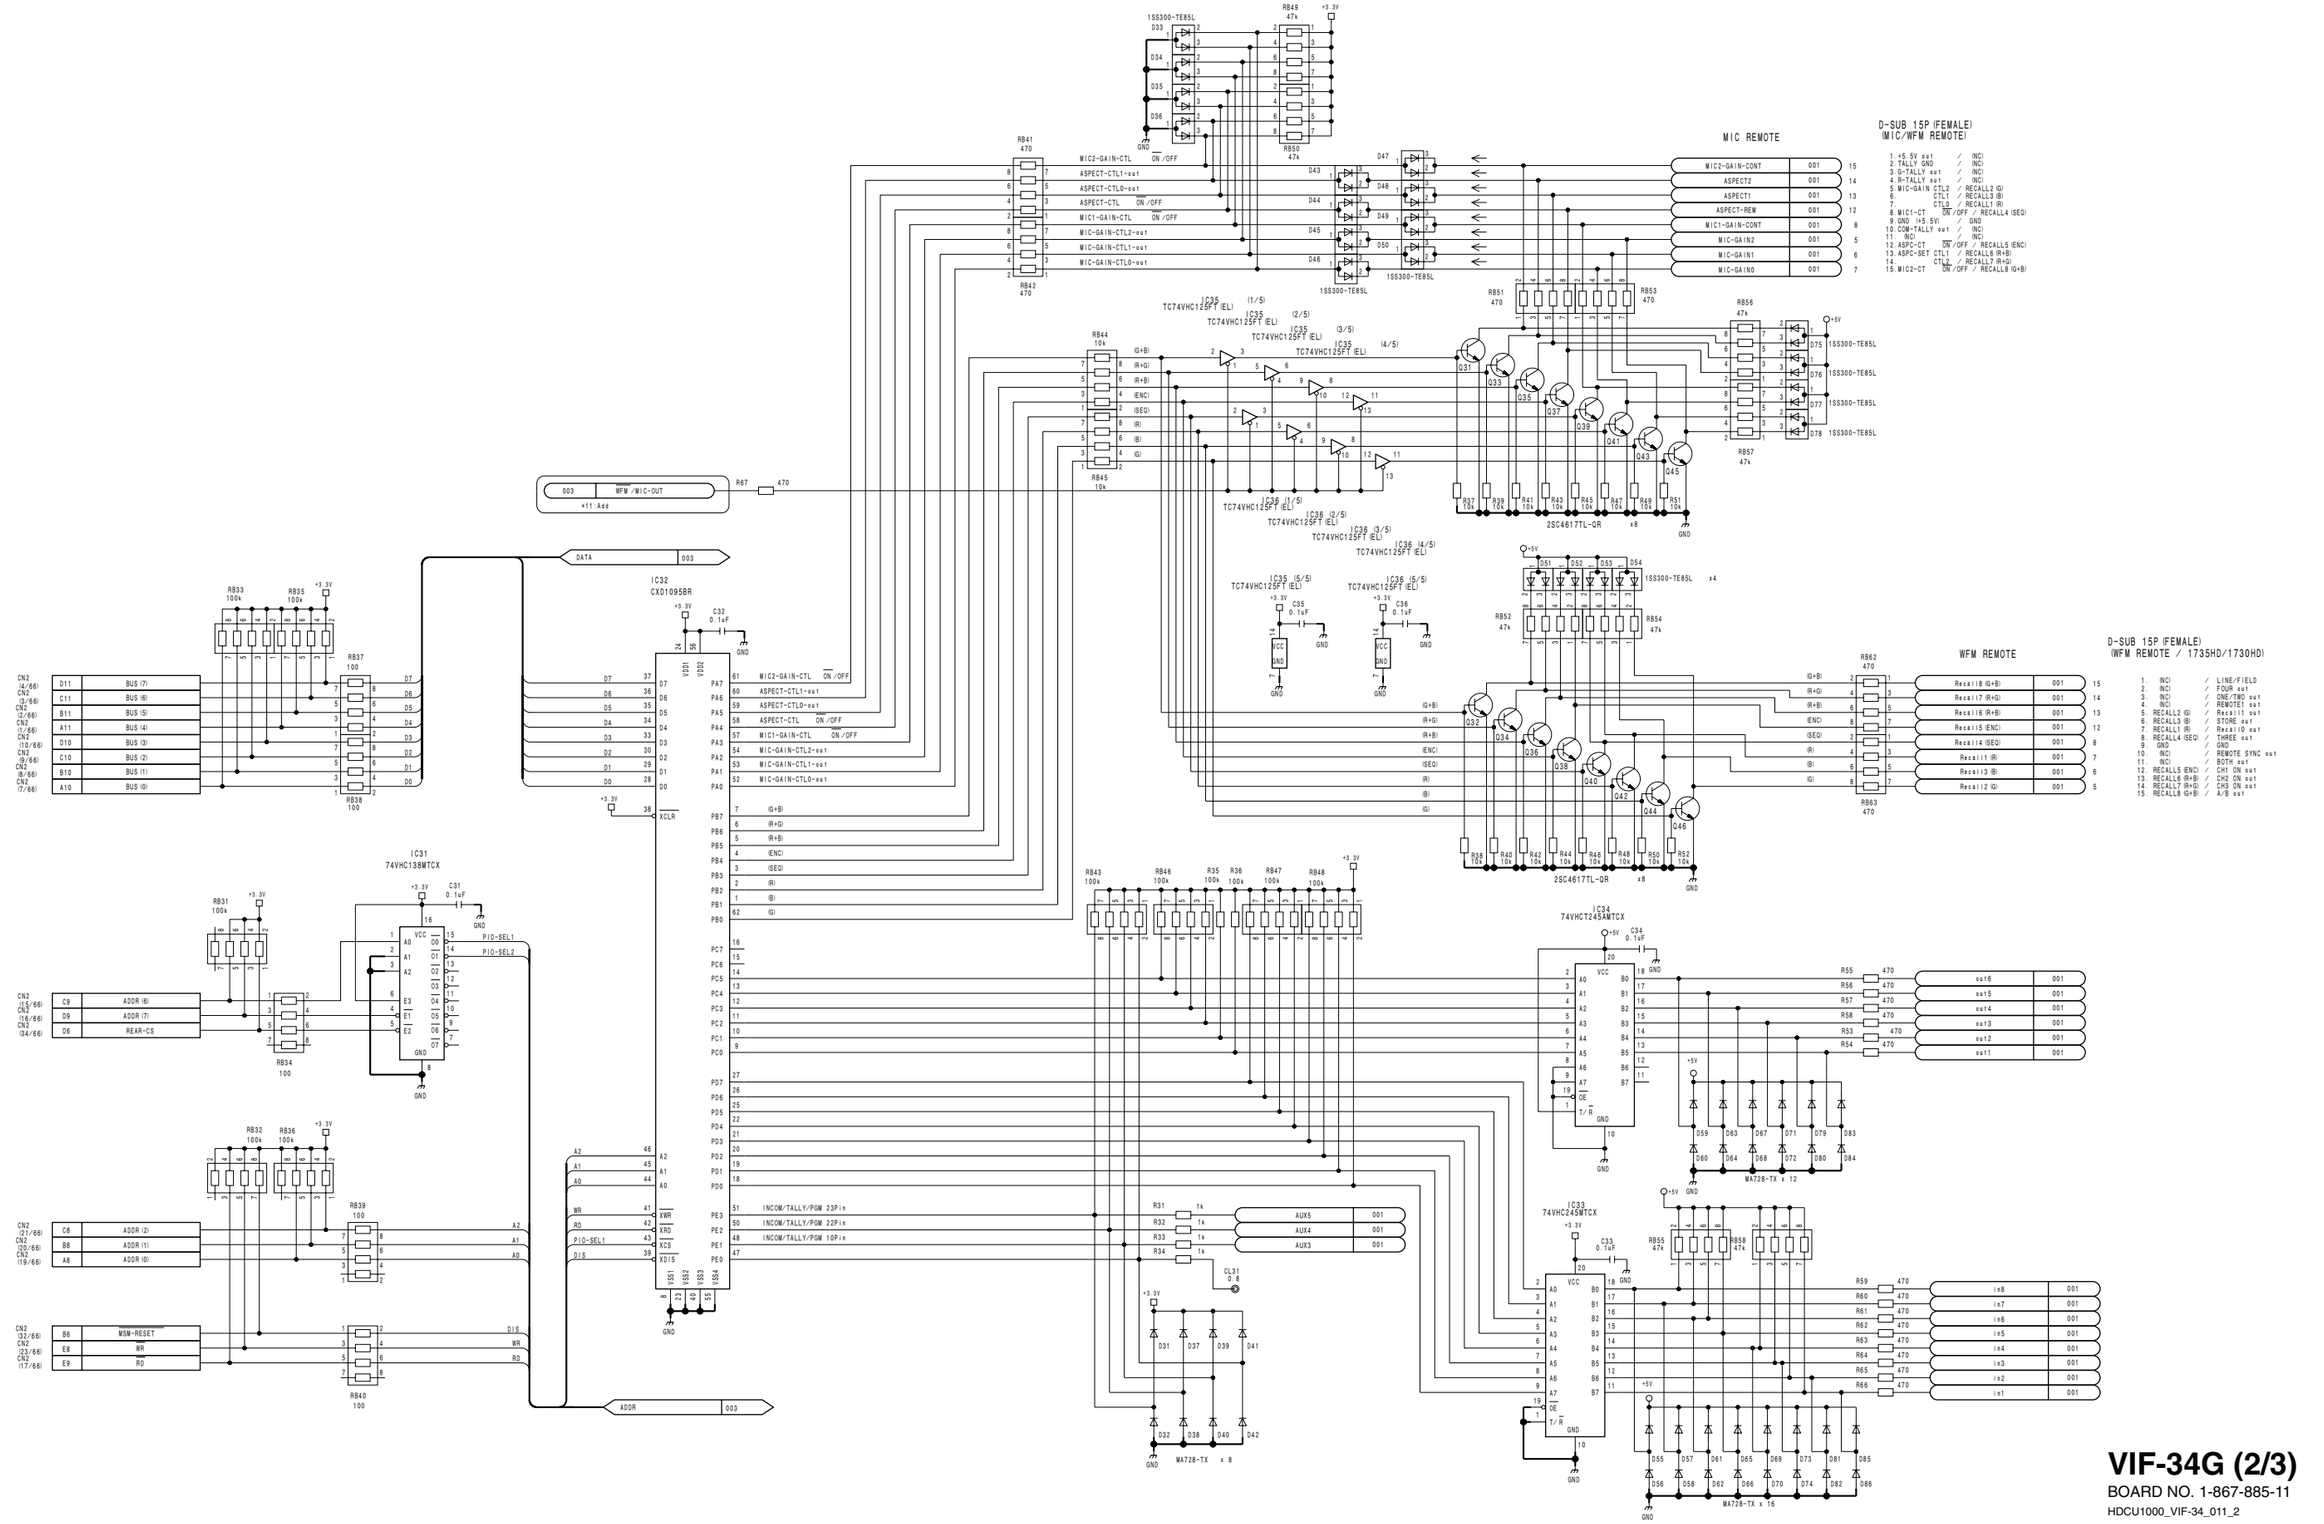



7-132

**VIF-34G (2/3)**
BOARD NO. 1-867-885-11
HDCU1000_VIF-34_011_2

HDCU3300/MM (J,E)

# VIF-34G (3/3)
**SUFFIX: -11**

VIF-34G (3/3)
SUFFIX: -11

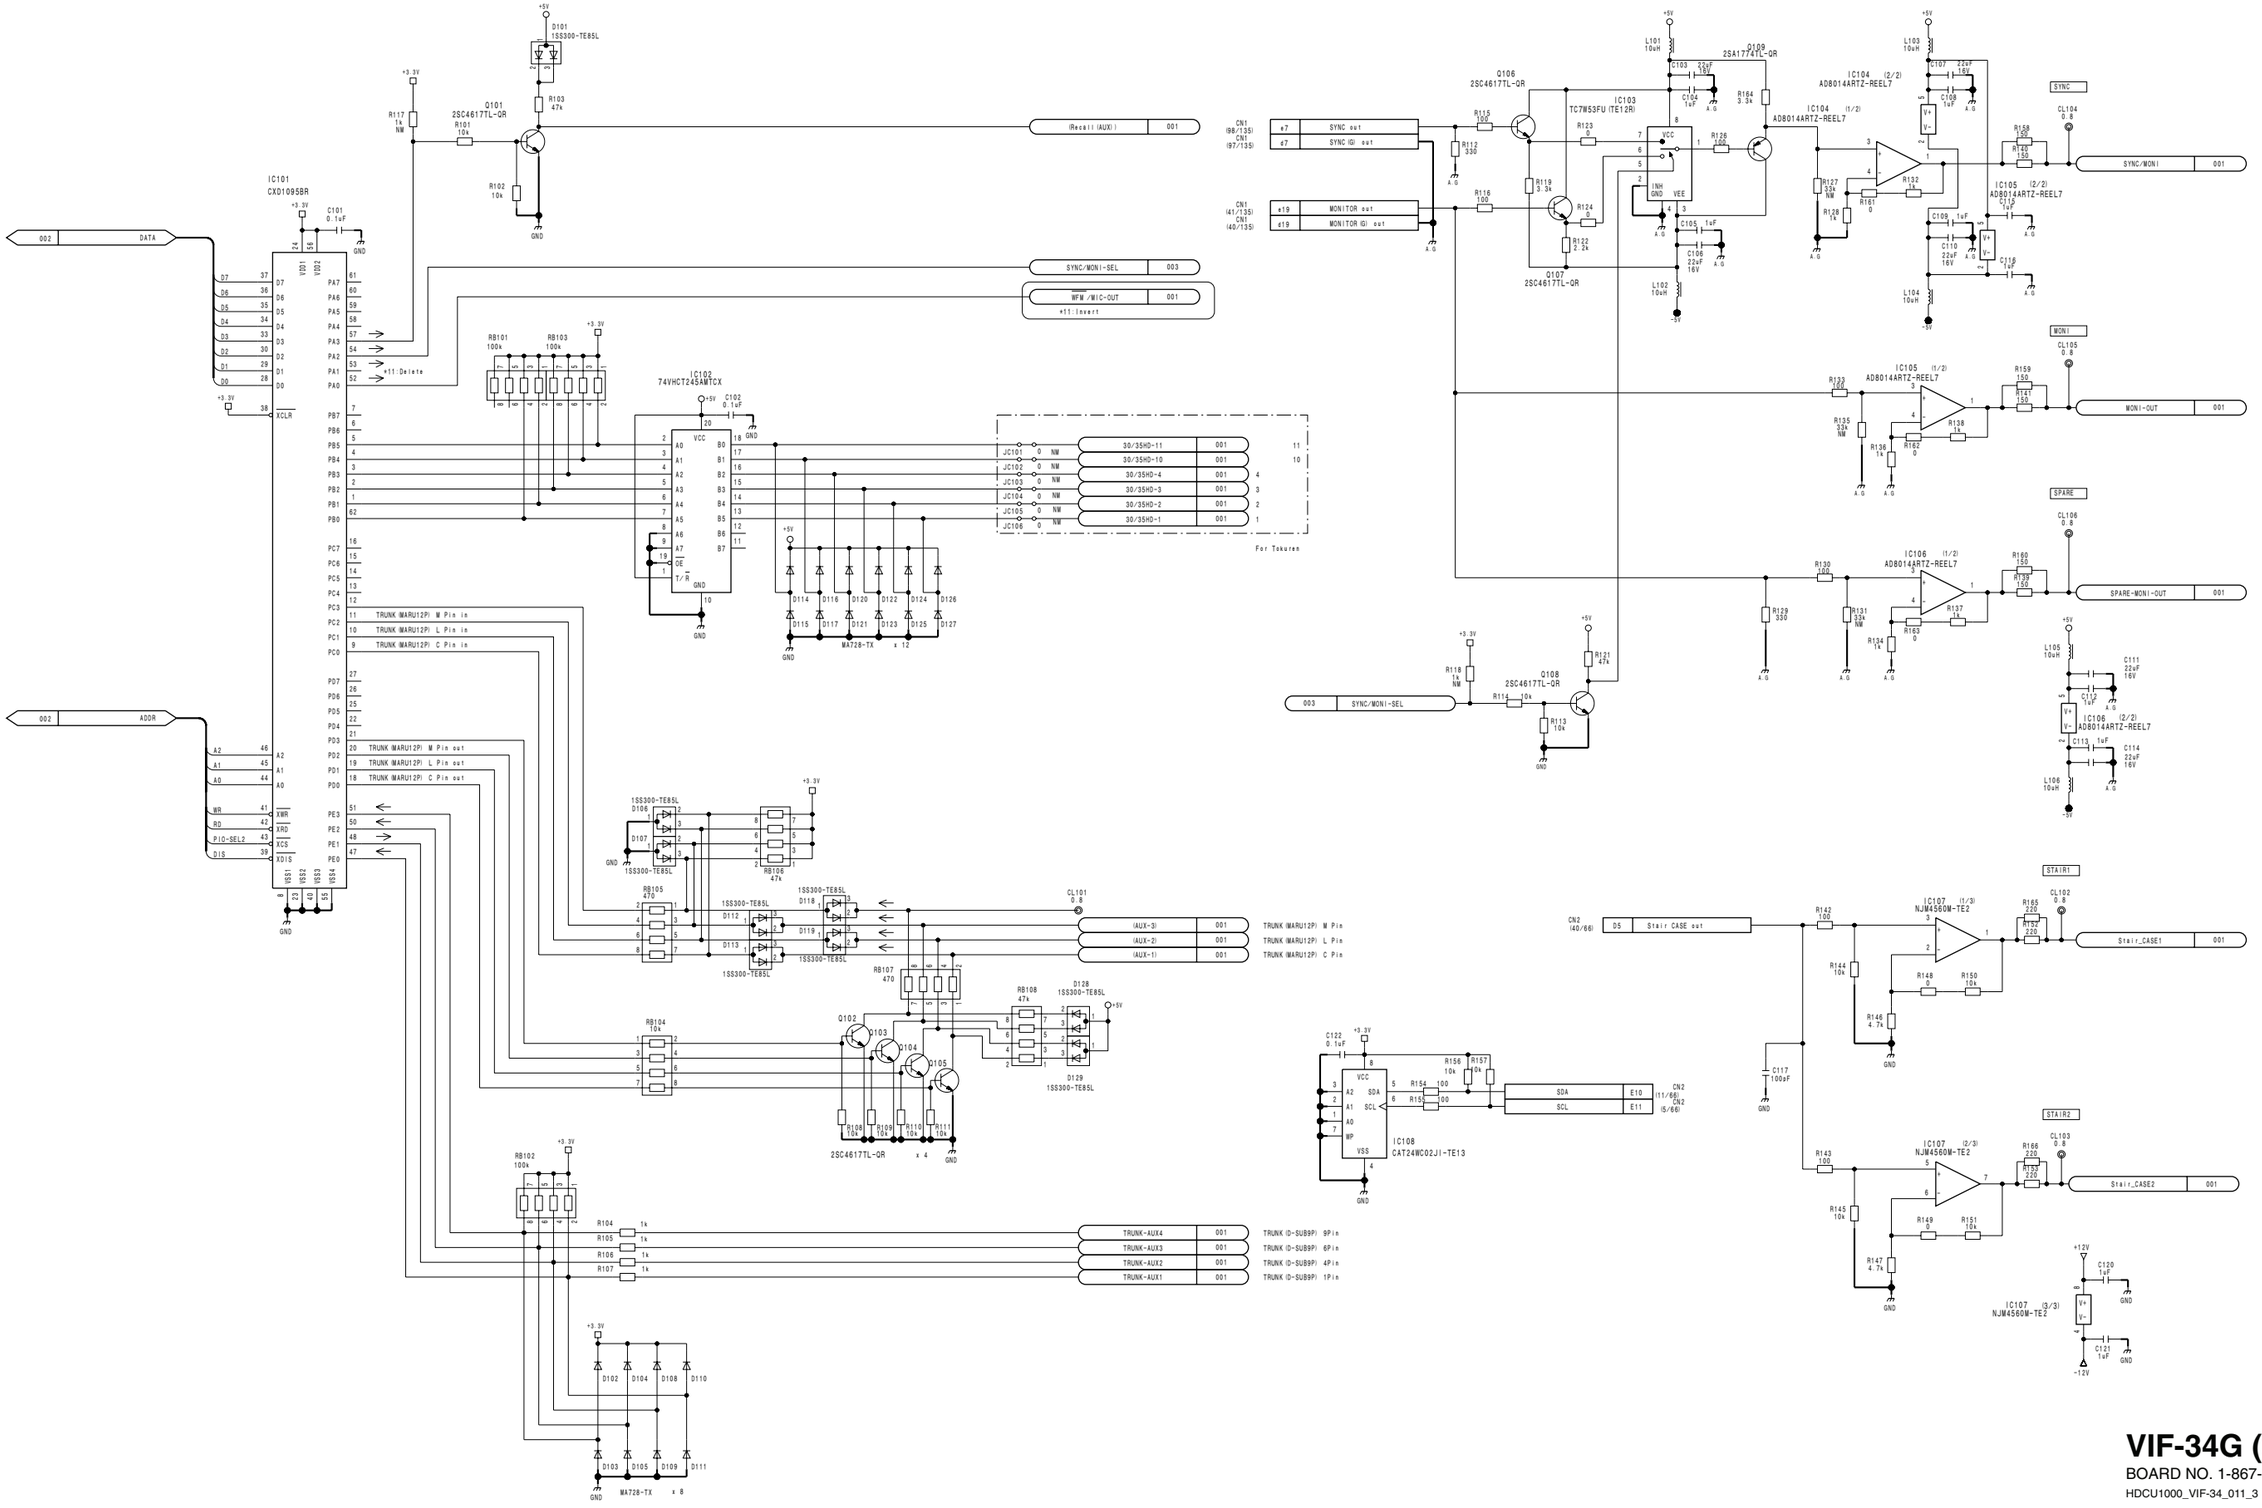


# VIF-34G (3/3)
BOARD NO. 1-867-885-11
HDCU1000_VIF-34_011_3

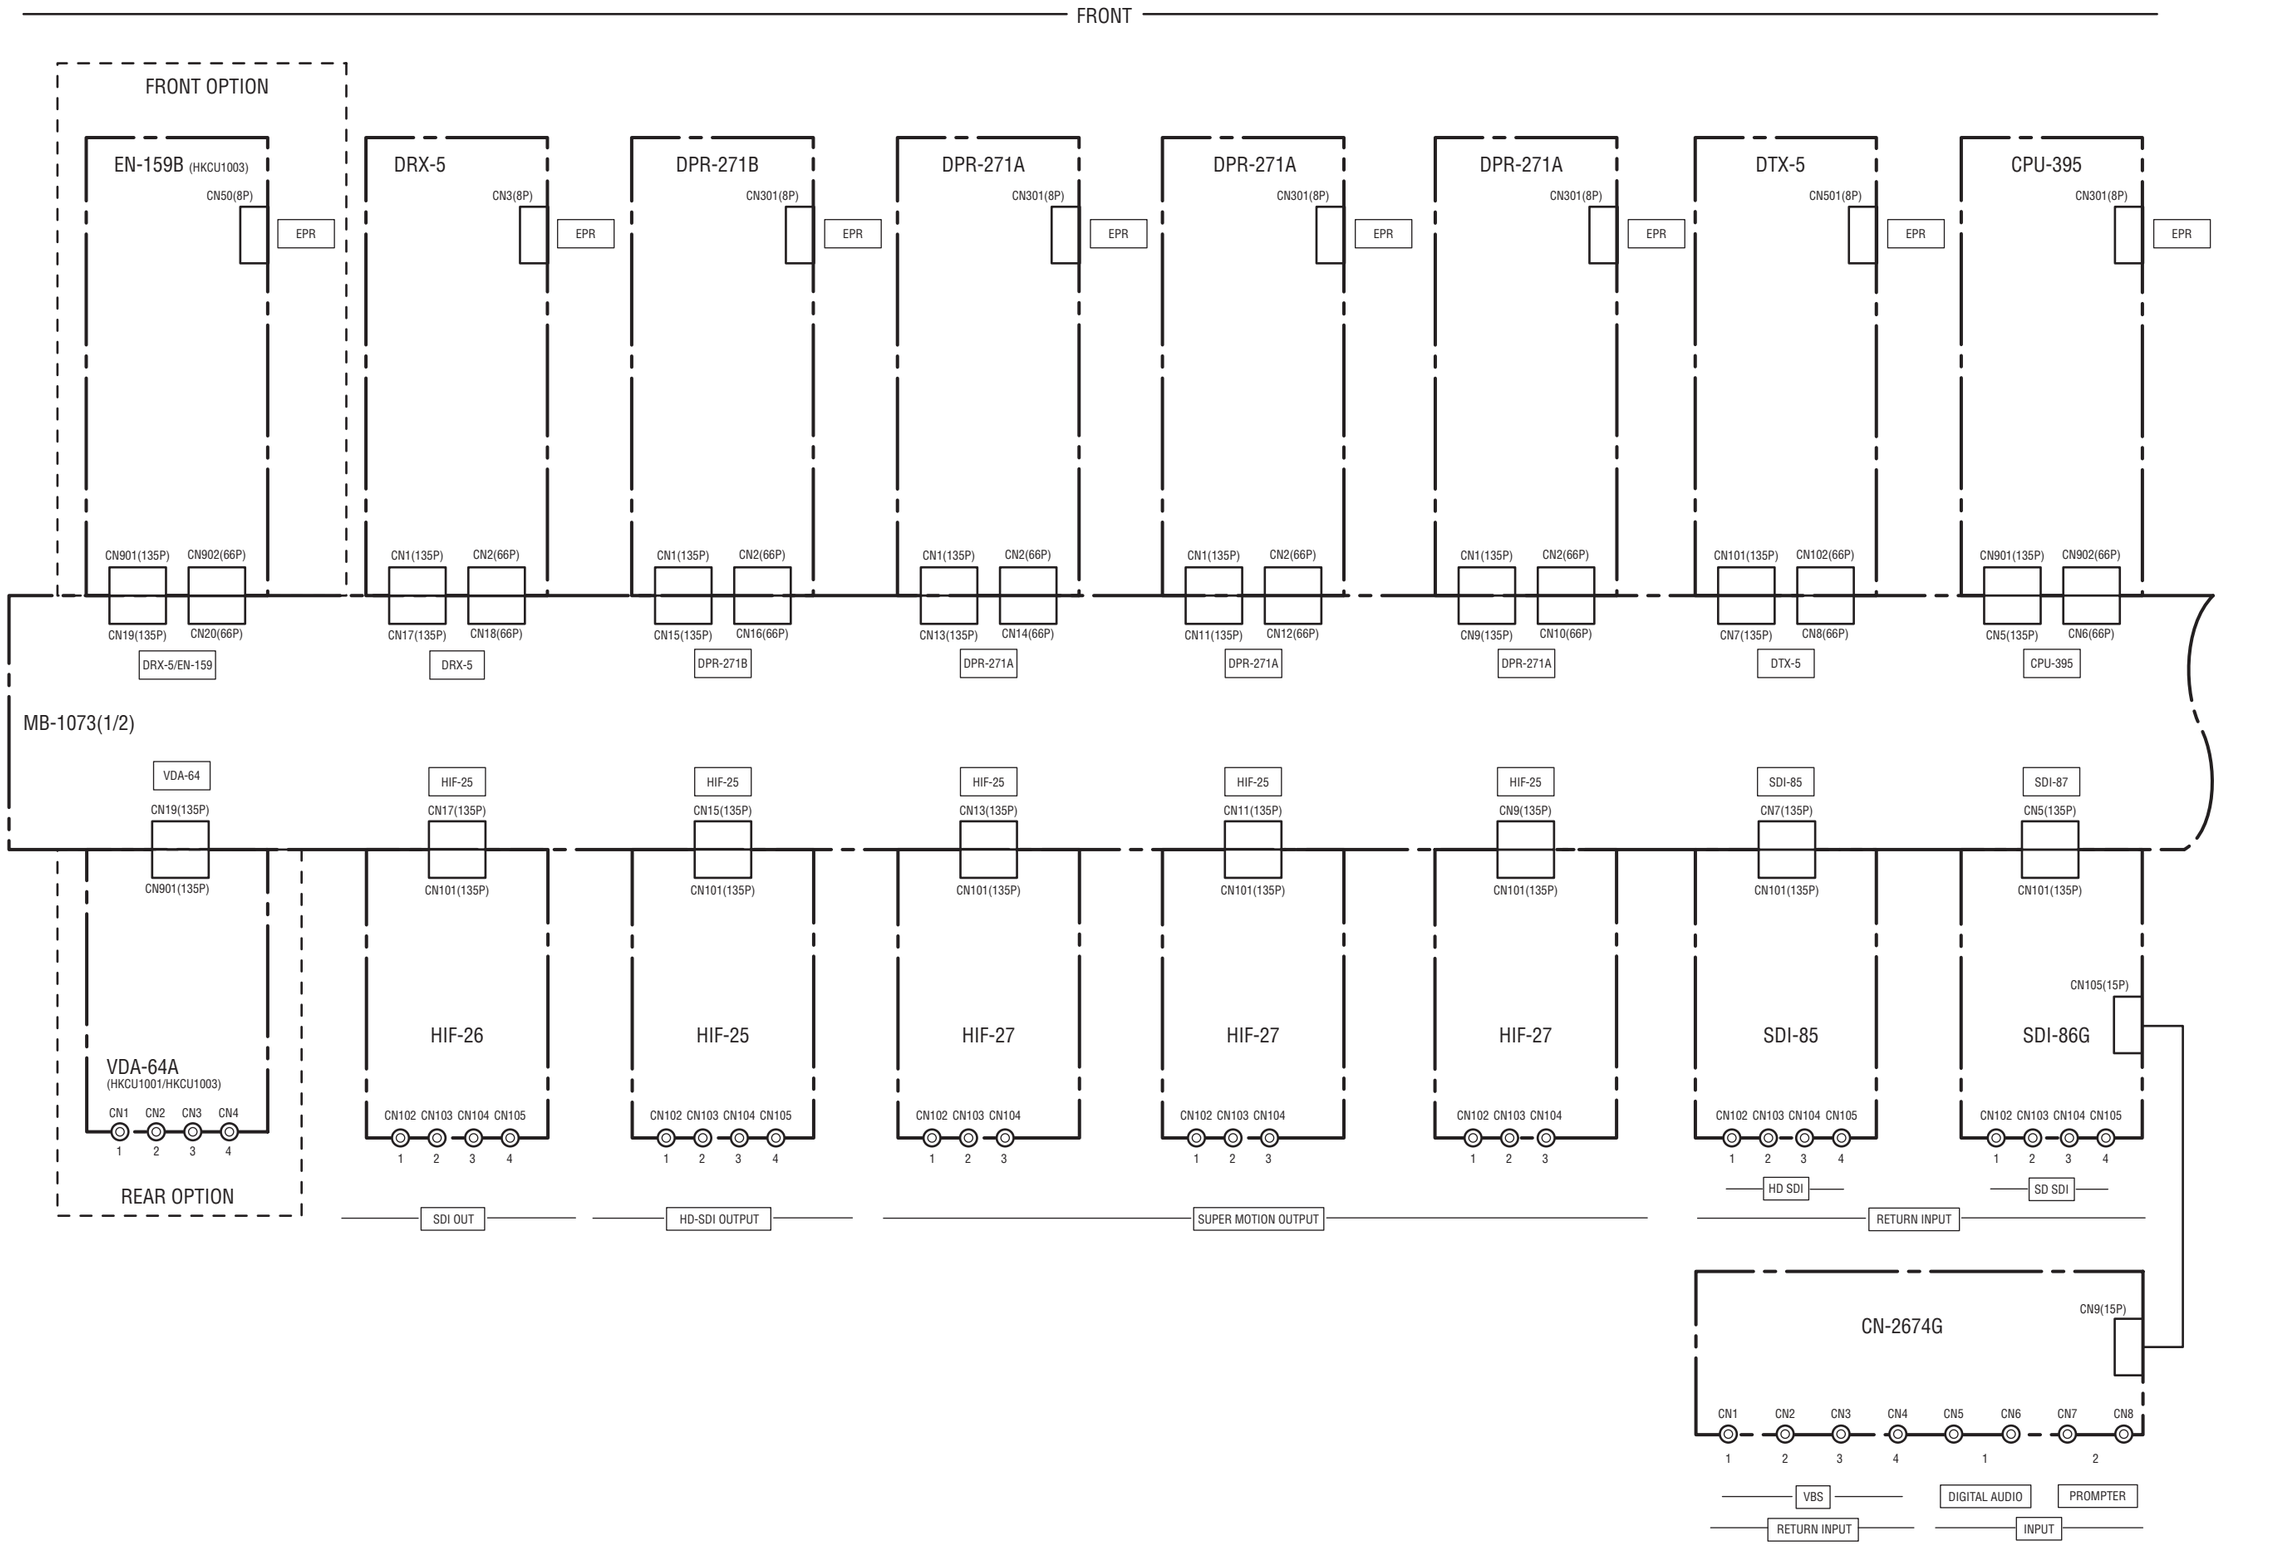
FRONT
FRONT OPTION
EN-159B (HKCU1003)
CN50(8P)
EPR
CN901(135P)
CN902(66P)
CN19(135P)
CN20(66P)
DRX-5/EN-159
DRX-5
CN3(8P)
CN1(135P)
CN2(66P)
CN17(135P)
CN18(66P)
DPR-271B
CN301(8P)
CN15(135P)
CN16(66P)
DPR-271A
CN13(135P)
CN14(66P)
CN11(135P)
CN12(66P)
CN9(135P)
CN10(66P)
DTX-5
CN501(8P)
CN101(135P)
CN102(66P)
CN7(135P)
CN8(66P)
CPU-395
CN5(135P)
CN6(66P)
MB-1073(1/2)
VDA-64
HIF-25
HIF-26
HIF-27
SDI-85
SDI-87
SDI-86G
CN101(135P)
CN105(15P)
VDA-64A
(HKCU1001/HKCU1003)
CN1 CN2 CN3 CN4
REAR OPTION
CN102 CN103 CN104 CN105
SDI OUT
HD-SDI OUTPUT
SUPER MOTION OUTPUT
HD SDI
SD SDI
RETURN INPUT
CN-2674G
CN9(15P)
CN1 CN2 CN3 CN4 CN5 CN6 CN7 CN8
VBS
RETURN INPUT
DIGITAL AUDIO
INPUT
PROMPTER

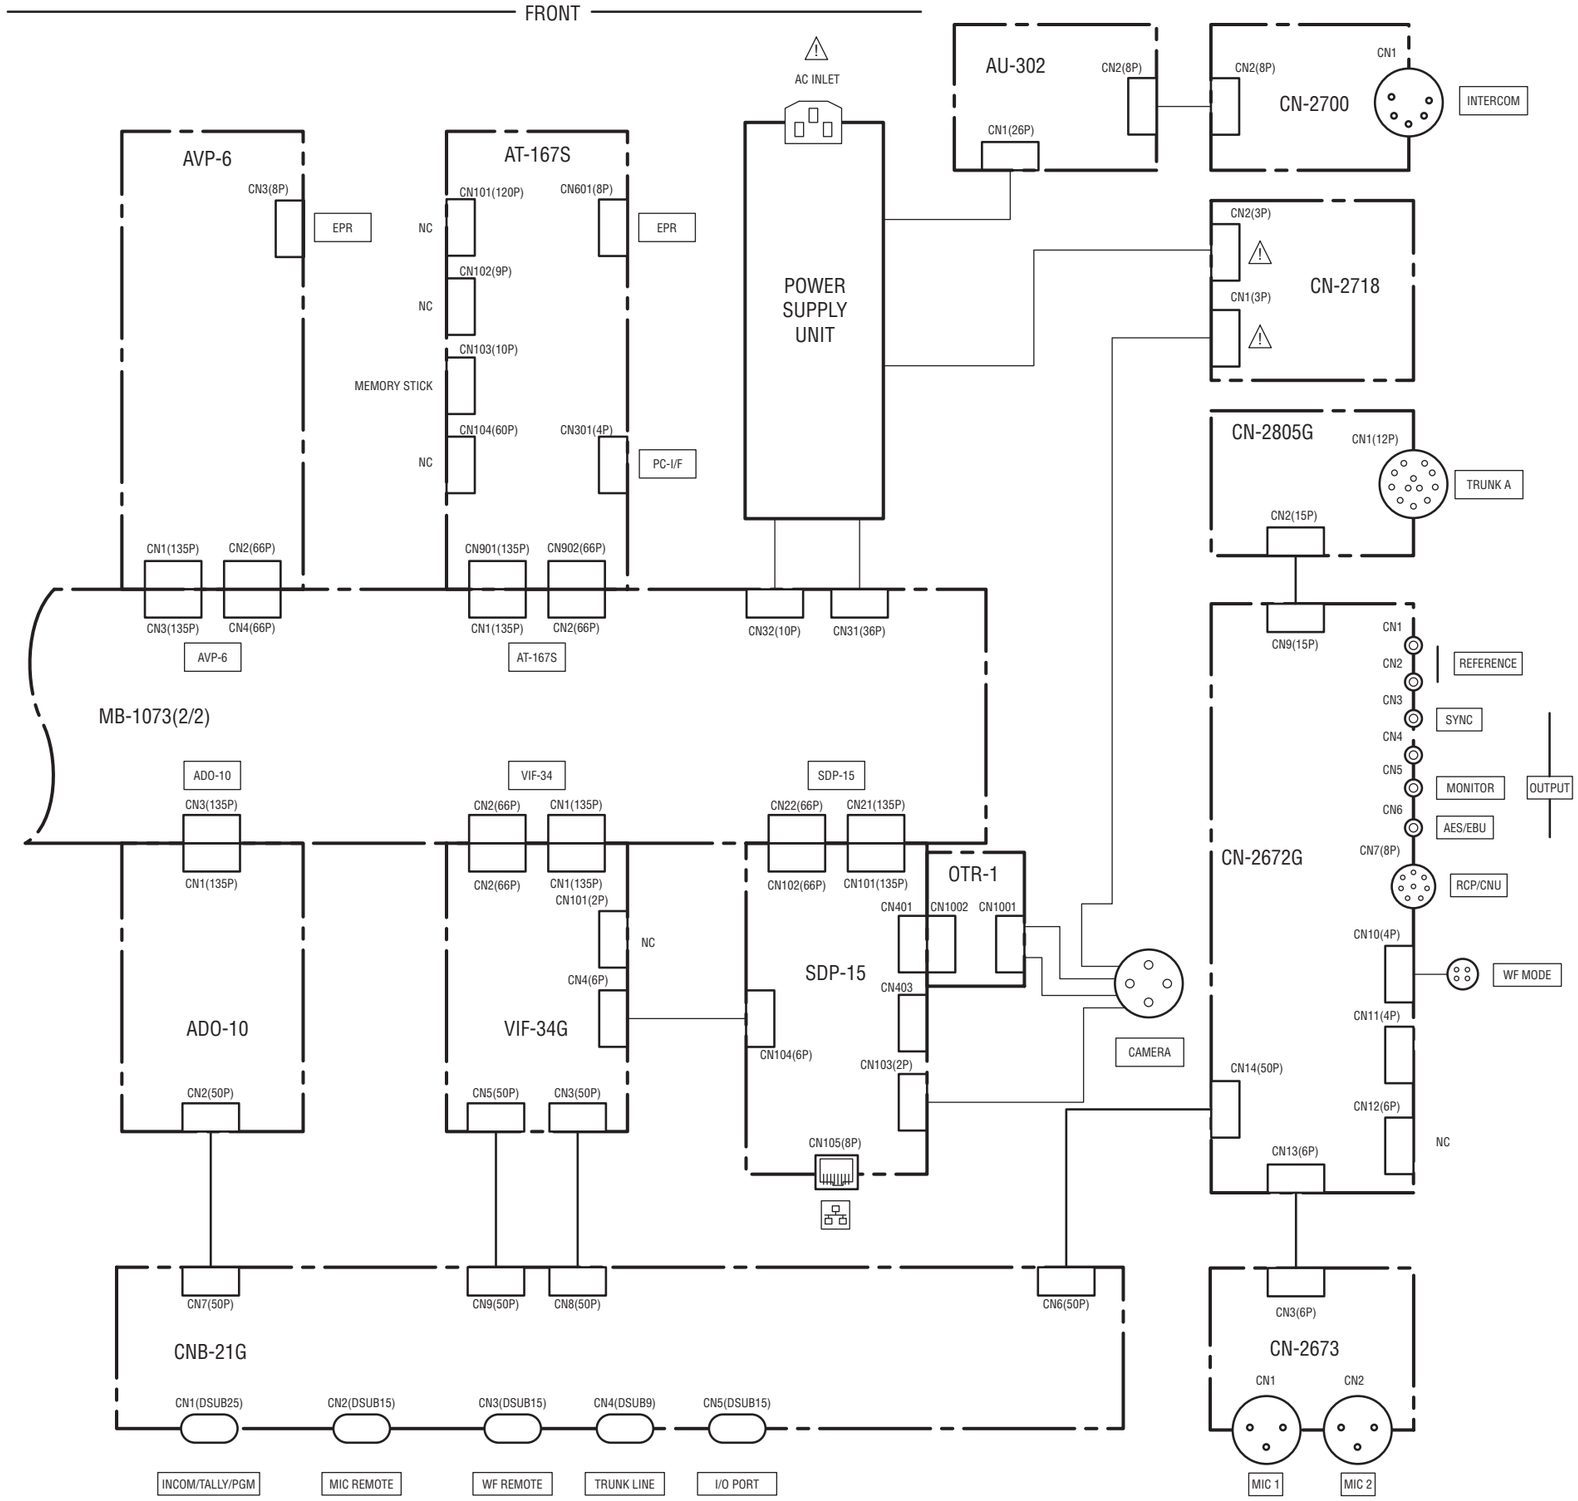
FRONT
AC INLET
AU-302
CN2(8P)
CN1(26P)
CN2(8P)
CN1
CN-2700
INTERCOM
AVP-6
CN3(8P)
EPR
AT-167S
CN101(120P)
NC
CN601(8P)
EPR
CN102(9P)
NC
CN103(10P)
MEMORY STICK
CN104(60P)
NC
CN301(4P)
PC-I/F
POWER SUPPLY UNIT
CN2(3P)
CN1(3P)
CN-2718
CN-2805G
CN1(12P)
TRUNK A
CN2(15P)
CN1(135P)
CN2(66P)
CN3(135P)
CN4(66P)
AVP-6
CN901(135P)
CN902(66P)
CN1(135P)
CN2(66P)
AT-167S
CN32(10P)
CN31(36P)
CN9(15P)
CN1
CN2
REFERENCE
CN3
SYNC
CN4
CN5
MONITOR
OUTPUT
CN6
AES/EBU
CN7(8P)
RCP/CNU
MB-1073(2/2)
ADO-10
CN3(135P)
CN1(135P)
VIF-34
CN2(66P)
CN1(135P)
CN2(66P)
CN1(135P)
CN101(2P)
NC
CN4(6P)
SDP-15
CN22(66P)
CN21(135P)
CN102(66P)
CN101(135P)
OTR-1
CN401
CN1002
CN1001
SDP-15
CN403
CN103(2P)
CN104(6P)
CAMERA
CN105(8P)
CN-2672G
CN10(4P)
WF MODE
CN11(4P)
CN12(6P)
NC
CN14(50P)
CN13(6P)
ADO-10
CN2(50P)
VIF-34G
CN5(50P)
CN3(50P)
CN7(50P)
CN9(50P)
CN8(50P)
CN6(50P)
CN3(6P)
CN-2673
CNB-21G
CN1
CN2
CN1(DSUB25)
CN2(DSUB15)
CN3(DSUB15)
CN4(DSUB9)
CN5(DSUB15)
MIC 1
MIC 2
INCOM/TALLY/PGM
MIC REMOTE
WF REMOTE
TRUNK LINE
I/O PORT

# Section 8
# Board Layouts

## Index


| Board Name | Page |
|---|---|
| ADO-10 | 8-3 |
| AT-167 | 8-2 |
| AU-302 | 8-3 |
| AVP-6 | 8-4 |
| CN-2672 | 8-5 |
| CN-2673 | 8-5 |
| CN-2674 | 8-5 |
| CN-2700 | 8-5 |
| CN-2718 | 8-5 |
| CN-2805 | 8-5 |
| CNB-21 | 8-6 |
| CPU-395 | 8-7 |
| DPR-271A | 8-8 |
| DRX-5 | 8-9 |
| DTX-5 | 8-10 |
| EN-159 | 8-11 |
| HIF-25 | 8-12 |
| HIF-26 | 8-12 |
| HIF-27 | 8-13 |
| MB-1073 | 8-13 |
| OTR-1 | 8-14 |
| SDI-85 | 8-15 |
| SDI-86 | 8-15 |
| SDP-15 | 8-16 |
| VDA-64 | 8-17 |
| VIF-34 | 8-17 |


## Board List

| Board Name | HDCU3300 | HKCU1001 | HKCU1003 | HKCU1005 |
|---|---|---|---|---|
| ADO-10G | ○ | – | – | – |
| AT-167S | ○ | – | – | – |
| AU-302 | ○ | – | – | – |
| AVP-6 | ○ | – | – | – |
| CN-2672G | ○ | – | – | – |
| CN-2673 | ○ | – | – | – |
| CN-2674G | ○ | – | – | – |
| CN-2700 | ○ | – | – | – |
| CN-2718 | ○ | – | – | – |
| CN-2805G | ○ | – | – | – |
| CNB-21G | ○ | – | – | – |
| CPU-395 | ○ | – | – | – |
| DPR-271A | ○ | – | – | – |
| DPR-271B | ○ | – | – | – |
| DRX-5 | ○ | – | – | ○ |
| DTX-5 | ○ | – | – | – |
| EN-159A | – | ○ | – | – |
| EN-159B | – | – | ○ | – |
| HIF-25 | ○ | – | – | – |
| HIF-26 | ○ | – | – | ○ |
| HIF-27 | ○ | – | – | – |
| MB-1073 | ○ | – | – | – |
| OTR-1 | ○ | – | – | – |
| SDI-85 | ○ | – | – | – |
| SDI-86G | ○ | – | – | – |
| SDP-15 | ○ | – | – | – |
| VDA-64A | – | ○ | ○ | – |
| VDA-64B | – | – | ○ | – |
| VIF-34G | ○ | – | – | – |

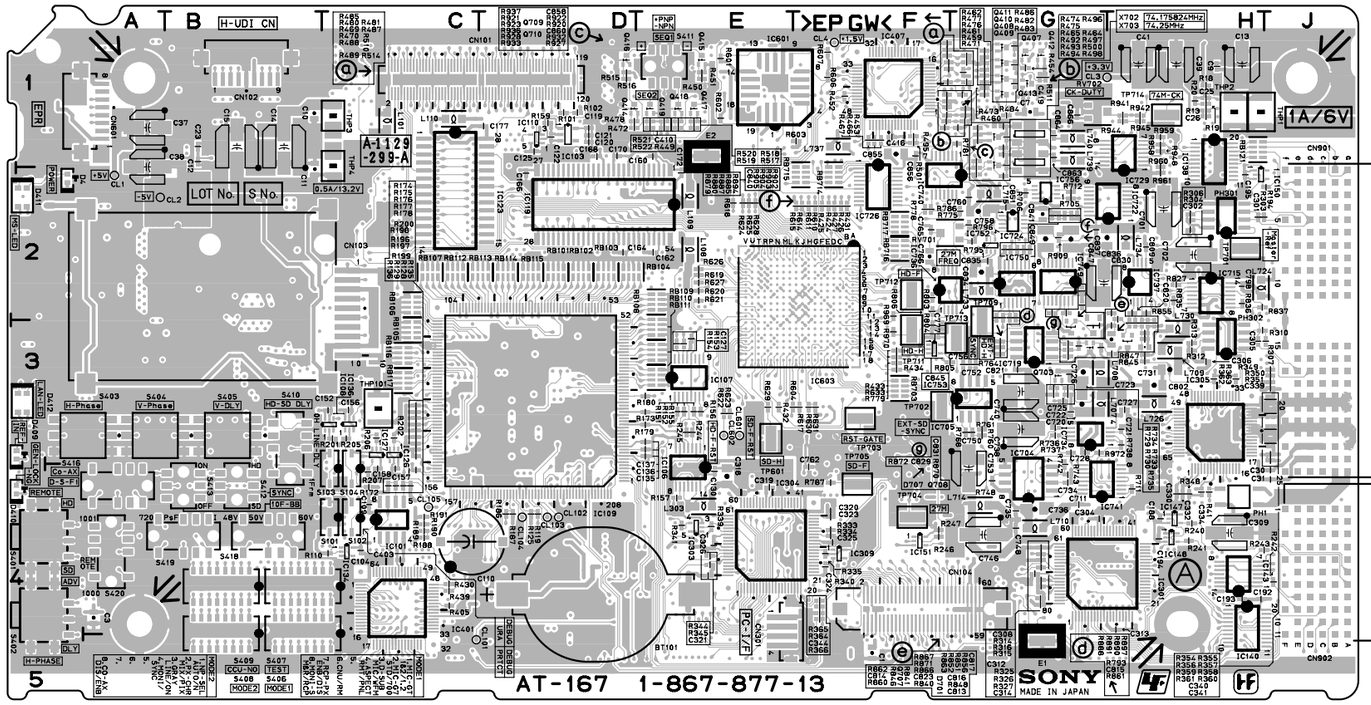


**AT-167** -A SIDE-
SUFFIX: -13

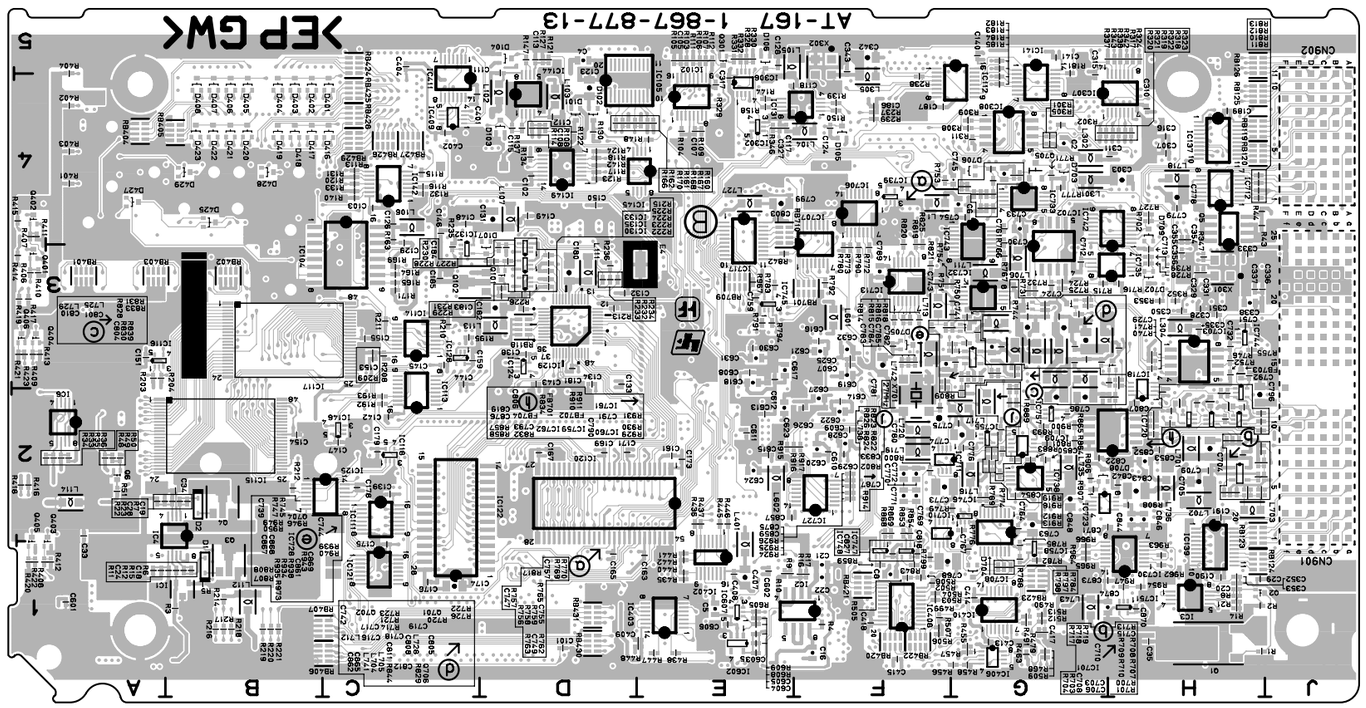


**AT-167** -B SIDE-
SUFFIX: -13

---
AT-167 (1-867-877-13)
---

*:B SIDE

| | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| BT101 | D4 | IC108 | C3 | IC727 | *F2 | L736 | *H2 | TP705 | F4 | | |
| | | IC109 | D3 | IC728 | *G3 | L737 | F1 | TP709 | G3 | | |
| CL1 | A2 | IC110 | D1 | IC729 | H1 | L738 | *G2 | TP711 | F3 | | |
| CL2 | A2 | IC111 | *C2 | IC730 | *H1 | L739 | G1 | TP712 | F2 | | |
| CL3 | G1 | IC112 | *F5 | IC732 | *G3 | L740 | G1 | TP713 | G3 | | |
| CL4 | F1 | IC113 | *C2 | IC733 | *G4 | L741 | *G3 | TP714 | H1 | | |
| CL101 | C5 | IC114 | *C3 | IC734 | H3 | L742 | *F3 | | | | |
| CL102 | D4 | IC115 | *B2 | IC735 | *H3 | L743 | *G1 | X301 | *H3 | | |
| CL103 | D4 | IC116 | *A3 | IC736 | F2 | | | X302 | *F5 | | |
| CL104 | D4 | IC117 | *B3 | IC737 | H2 | PH1 | H4 | X701 | *F2 | | |
| CL105 | C4 | IC118 | *C2 | IC738 | *G2 | PH301 | H2 | X702 | G1 | | |
| CL601 | E3 | IC119 | E2 | IC739 | *F4 | PH302 | H3 | X703 | G1 | | |
| CL602 | E3 | IC120 | *E2 | IC740 | G1 | | | | | | |
| | | IC121 | *C1 | IC741 | H4 | Q1 | *H1 | | | | |
| CN101 | D1 | IC122 | *D1 | IC742 | *H4 | Q2 | *H1 | | | | |
| CN102 | B1 | IC123 | C1 | IC743 | *G4 | Q3 | *B1 | | | | |
| CN103 | B2 | IC124 | *D3 | IC744 | *H3 | Q4 | *B2 | | | | |
| CN104 | F4 | IC125 | *B2 | IC745 | *E3 | Q5 | *H4 | | | | |
| CN301 | E4 | IC126 | C3 | IC746 | *G2 | Q6 | *A2 | | | | |
| CN601 | A1 | IC127 | C3 | IC747 | *F1 | Q101 | *D3 | | | | |
| CN901 | J3 | IC128 | *C3 | IC748 | *F1 | Q102 | *C3 | | | | |
| CN902 | J5 | IC129 | *D3 | IC749 | G2 | Q301 | *E5 | | | | |
| | | IC130 | *D3 | IC750 | G2 | Q401 | *A3 | | | | |
| D1 | *B1 | IC131 | *F4 | IC751 | *H1 | Q402 | *A4 | | | | |
| D2 | *B2 | IC132 | *C3 | IC752 | G2 | Q403 | *A1 | | | | |
| D4 | A2 | IC133 | *D3 | IC753 | F3 | Q404 | *A3 | | | | |
| D101 | *D4 | IC134 | C4 | IC755 | *G2 | Q405 | *A1 | | | | |
| D102 | *D4 | IC135 | *D3 | IC756 | G2 | Q406 | *A3 | | | | |
| D103 | *D4 | IC136 | C3 | IC757 | *G2 | Q407 | G1 | | | | |
| D104 | *D5 | IC137 | *H4 | IC758 | *G1 | Q408 | G1 | | | | |
| D105 | *F4 | IC138 | H1 | IC759 | *H2 | Q409 | G1 | | | | |
| D106 | *E5 | IC139 | *H2 | IC760 | *H2 | Q410 | G1 | | | | |
| D107 | *D3 | IC140 | H4 | IC761 | *H2 | Q411 | G1 | | | | |
| D401 | *C4 | IC141 | *G5 | IC762 | *H2 | Q412 | G1 | | | | |
| D402 | *B4 | IC142 | *C4 | | | Q413 | G1 | | | | |
| D403 | *B4 | IC143 | H4 | L1 | *F4 | Q414 | D1 | | | | |
| D404 | *B4 | IC144 | *D4 | L101 | C1 | Q415 | E1 | | | | |
| D405 | *B4 | IC145 | *E4 | L102 | *D4 | Q416 | D1 | | | | |
| D406 | *B4 | IC146 | *C2 | L103 | *D4 | Q417 | E1 | | | | |
| D407 | *B4 | IC147 | H4 | L104 | *F4 | Q418 | E1 | | | | |
| D408 | *B4 | IC148 | H4 | L105 | *E5 | Q419 | E1 | | | | |
| D409 | A3 | IC149 | *D4 | L106 | *C4 | Q701 | *G3 | | | | |
| D410 | A4 | IC150 | H2 | L107 | *D4 | Q702 | *G3 | | | | |
| D411 | A2 | IC151 | F4 | L108 | E2 | Q703 | G3 | | | | |
| D412 | A3 | IC301 | G4 | L109 | E2 | Q704 | *G3 | | | | |
| D416 | *C4 | IC302 | *E4 | L110 | C1 | Q705 | *G4 | | | | |
| D417 | *B4 | IC303 | E4 | L111 | *D3 | Q706 | *H3 | | | | |
| D418 | *B4 | IC304 | E4 | L112 | *B1 | Q707 | G3 | | | | |
| D419 | *B4 | IC305 | H3 | L113 | *D3 | Q708 | G3 | | | | |
| D420 | *B4 | IC306 | *E4 | L114 | *A2 | Q709 | G1 | | | | |
| D421 | *B4 | IC307 | *G4 | L301 | *G4 | Q710 | G1 | | | | |
| D422 | *B4 | IC308 | *G4 | L302 | *G4 | | | | | | |
| D423 | *B4 | IC309 | F4 | L303 | E4 | RV701 | F2 | | | | |
| D425 | *B4 | IC401 | C4 | L304 | *H3 | RV702 | G1 | | | | |
| D427 | *A4 | IC402 | *E2 | L305 | *F4 | | | | | | |
| D428 | *B4 | IC403 | *E1 | L401 | *E1 | S101 | C4 | | | | |
| D429 | *B4 | IC406 | *G1 | L601 | *F3 | S102 | C4 | | | | |
| D701 | H3 | IC407 | F1 | L602 | *E2 | S103 | C4 | | | | |
| D702 | *H3 | IC408 | *F1 | L701 | *H2 | S104 | C4 | | | | |
| D703 | *G4 | IC409 | *C4 | L702 | *H2 | S401 | A4 | | | | |
| D704 | *G1 | IC410 | *G1 | L703 | *H2 | S402 | A4 | | | | |
| D705 | *F3 | IC411 | *C5 | L704 | *G3 | S403 | A3 | | | | |
| D706 | *G4 | IC601 | E1 | L705 | *G3 | S404 | A3 | | | | |
| D707 | G3 | IC602 | *E1 | L706 | *G3 | S405 | B3 | | | | |
| D708 | *G2 | IC603 | F2 | L707 | G3 | S406 | B4 | | | | |
| D709 | *H4 | IC607 | *E1 | L708 | G3 | S407 | B4 | | | | |
| | | IC701 | *H2 | L709 | H3 | S408 | B4 | | | | |
| E1 | G5 | IC702 | *G3 | L710 | G4 | S409 | B4 | | | | |
| E2 | E1 | IC703 | *H3 | L711 | *G3 | S410 | B3 | | | | |
| E4 | *E3 | IC704 | G4 | L712 | *G3 | S411 | E1 | | | | |
| | | IC705 | G3 | L713 | *F3 | S412 | B4 | | | | |
| FB701 | *H2 | IC706 | *F4 | L714 | G4 | S413 | B4 | | | | |
| FB702 | *H2 | IC707 | *F3 | L715 | G2 | S416 | A4 | | | | |
| FB703 | *H3 | IC708 | *G2 | L716 | *G2 | S418 | B4 | | | | |
| FB704 | *H2 | IC709 | *G2 | L717 | *G2 | S419 | B4 | | | | |
| | | IC710 | *F2 | L718 | *H4 | S420 | A4 | | | | |
| IC1 | *B1 | IC711 | *F2 | L719 | *F2 | | | | | | |
| IC2 | *F1 | IC712 | *H4 | L720 | *F2 | THP1 | H1 | | | | |
| IC3 | *H1 | IC713 | *F3 | L724 | H2 | THP2 | H1 | | | | |
| IC4 | *B2 | IC715 | H2 | L725 | *G3 | THP3 | C1 | | | | |
| IC6 | *A2 | IC717 | *E4 | L726 | H3 | THP4 | C1 | | | | |
| IC101 | C4 | IC718 | *H2 | L727 | *E4 | THP101 | C3 | | | | |
| IC102 | *E4 | IC719 | G3 | L728 | *G3 | | | | | | |
| IC103 | D1 | IC720 | *H2 | L729 | *G3 | TP601 | E3 | | | | |
| IC104 | *B4 | IC722 | H2 | L730 | H3 | TP701 | H2 | | | | |
| IC105 | *D4 | IC723 | *G2 | L733 | G2 | TP702 | F3 | | | | |
| IC106 | E3 | IC724 | G2 | L734 | H2 | TP703 | F3 | | | | |
| IC107 | E3 | IC726 | F2 | L735 | *G2 | TP704 | F4 | | | | |

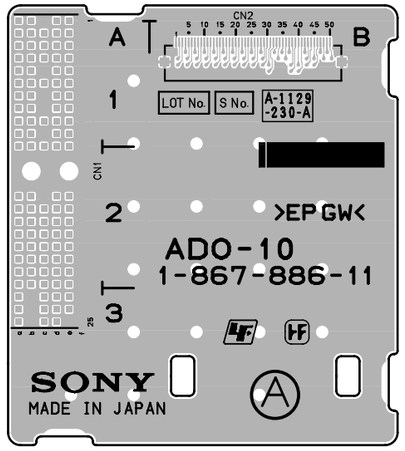


**ADO-10** -A SIDE-
SUFFIX: -11

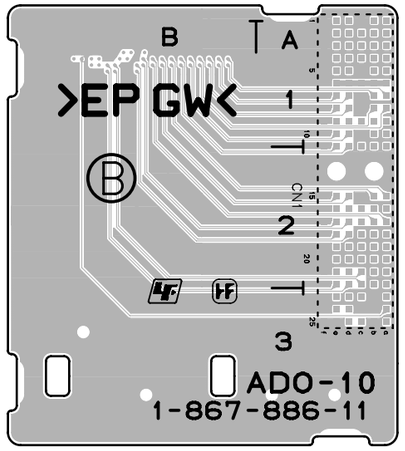


**ADO-10** -B SIDE-
SUFFIX: -11

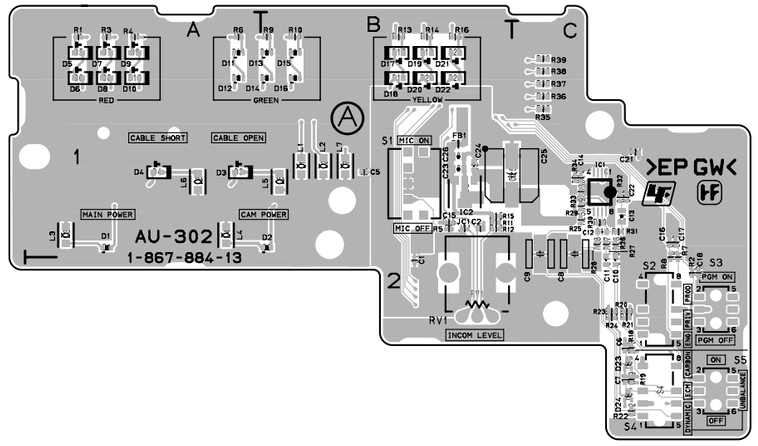


**AU-302** -A SIDE-
SUFFIX: -13

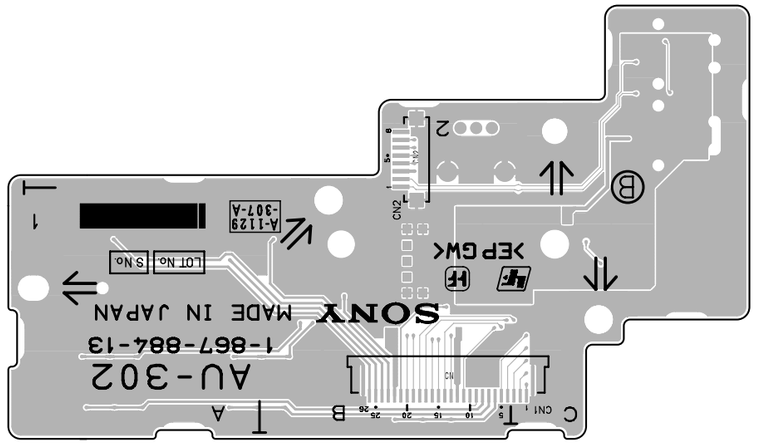


**AU-302** -B SIDE-
SUFFIX: -13

---
AU-302 (1-867-884-13)
---

*:B SIDE

| | |
|---|---|
| CN1 | *B1 |
| CN2 | *B2 |
| D1 | A1 |
| D2 | B1 |
| D3 | A1 |
| D4 | A1 |
| D5 | A1 |
| D6 | A1 |
| D7 | A1 |
| D8 | A1 |
| D9 | A1 |
| D10 | A1 |
| D11 | A1 |
| D12 | A1 |
| D13 | B1 |
| D14 | B1 |
| D15 | B1 |
| D16 | B1 |
| D17 | B1 |
| D18 | B1 |
| D19 | B1 |
| D20 | B1 |
| D21 | B1 |
| D22 | B1 |
| D23 | C2 |
| D24 | C2 |
| FB1 | B1 |
| IC1 | C1 |
| IC2 | B1 |
| L1 | B1 |
| L2 | B1 |
| L3 | A1 |
| L4 | A1 |
| L5 | B1 |
| L6 | A1 |
| L7 | B1 |
| RV1 | B2 |
| S1 | B1 |
| S2 | C2 |
| S3 | C2 |
| S4 | C2 |
| S5 | C2 |

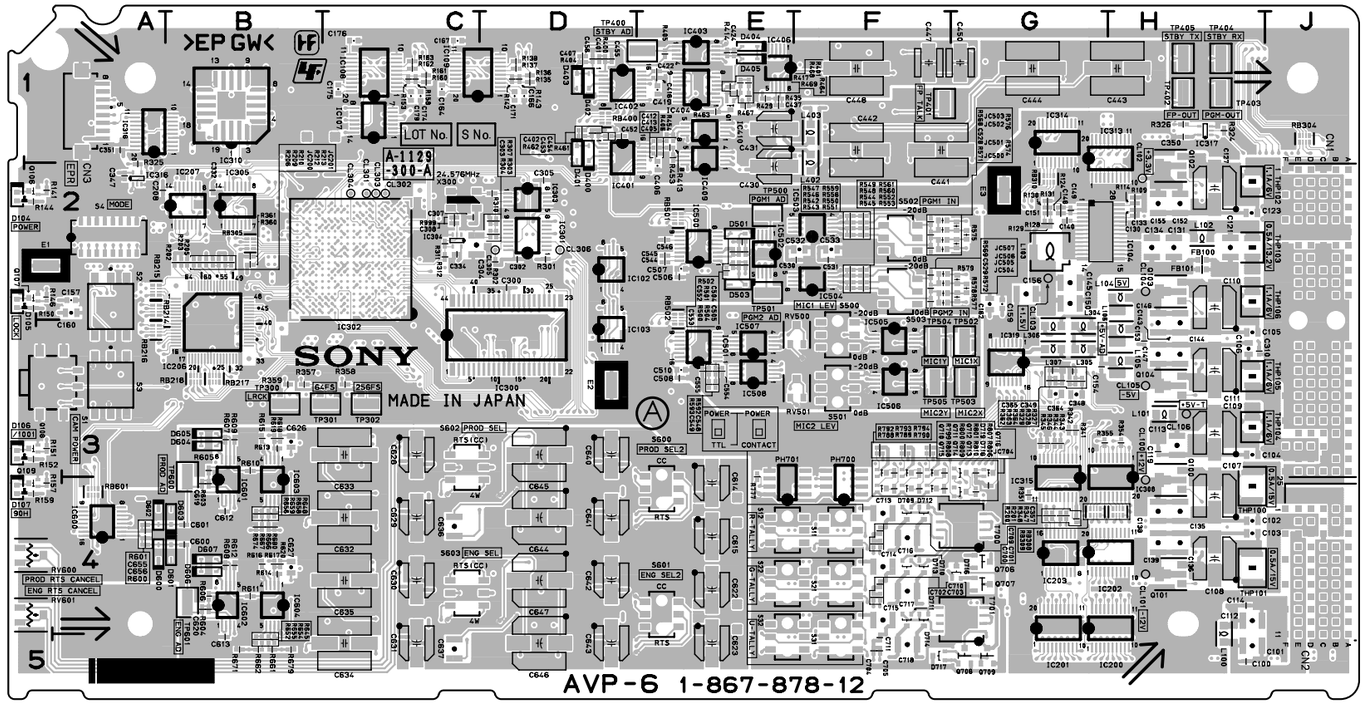


**AVP-6** -A SIDE-
SUFFIX: -12

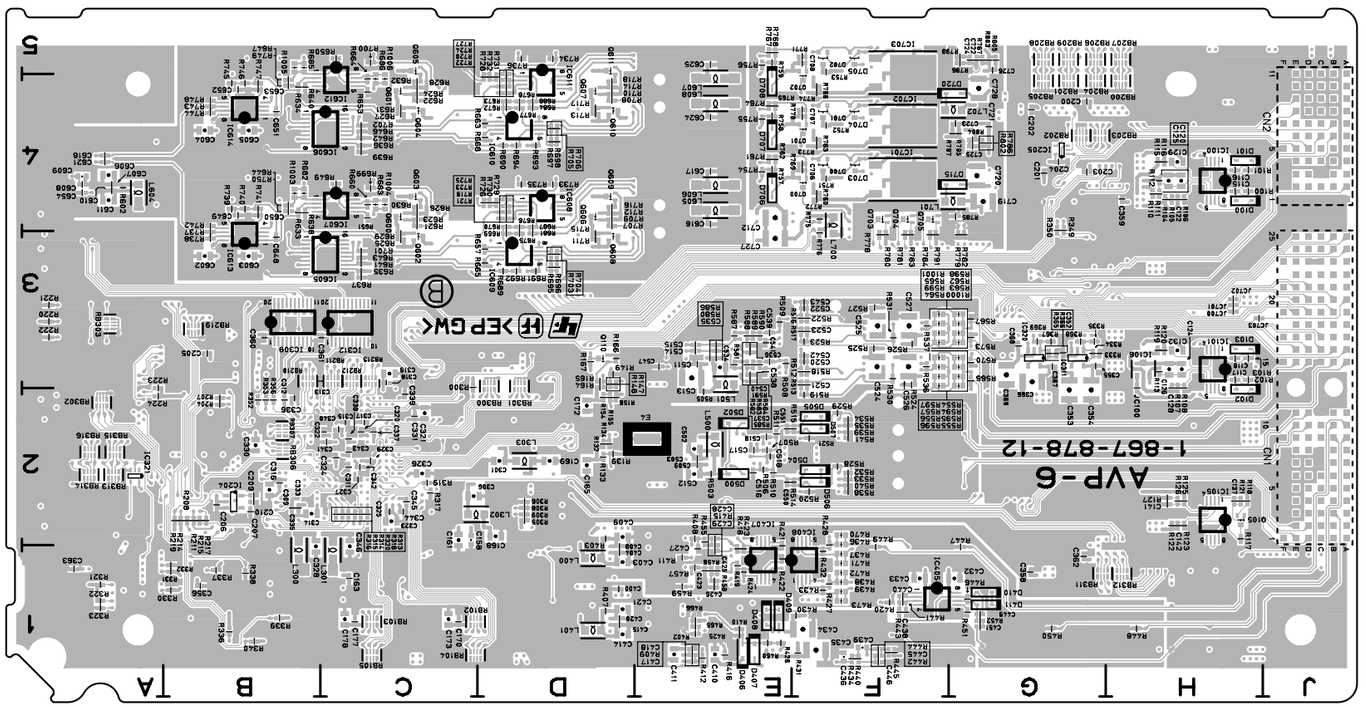


**AVP-6** -B SIDE-
SUFFIX: -12

---
AVP-6 (1-867-878-12)
---

*:B SIDE

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| CL100 | H4 | IC106 | *H3 | L501 | *E3 | TP300 | B3 |
| CL101 | H4 | IC107 | C1 | L604 | *A4 | TP301 | C3 |
| CL102 | H2 | IC108 | C1 | L605 | *E4 | TP302 | C3 |
| CL103 | G2 | IC109 | D1 | L606 | *E4 | TP400 | E1 |
| CL104 | H2 | IC200 | G5 | L607 | *E4 | TP401 | F1 |
| CL105 | H3 | IC201 | G5 | L608 | *E4 | TP402 | H1 |
| CL106 | H3 | IC202 | G4 | L700 | *F4 | TP403 | H1 |
| CL301 | C2 | IC203 | G4 | L701 | *G4 | TP404 | H1 |
| CL302 | C2 | IC204 | *B2 | L702 | *G4 | TP405 | H1 |
| CL303 | C2 | IC205 | *G4 | | | TP500 | E2 |
| CL304 | C2 | IC206 | B3 | PH700 | F4 | TP501 | E2 |
| CL305 | D2 | IC207 | B2 | PH701 | E4 | TP502 | G3 |
| CL306 | D2 | IC300 | C3 | | | TP503 | G3 |
| | | IC301 | D2 | Q1 | E1 | TP504 | F3 |
| CN1 | J3 | IC302 | C2 | Q100 | H4 | TP505 | F3 |
| CN2 | J5 | IC303 | D2 | Q101 | H4 | TP600 | B4 |
| CN3 | A1 | IC304 | C2 | Q102 | H2 | TP601 | B4 |
| | | IC305 | B2 | Q103 | H2 | | |
| D100 | *H4 | IC308 | H3 | Q104 | H3 | X300 | C2 |
| D101 | *H4 | IC309 | *B3 | Q105 | *H2 | | |
| D102 | *H2 | IC310 | B1 | Q106 | A2 | | |
| D103 | *H3 | IC311 | *G3 | Q107 | A2 | | |
| D104 | A2 | IC312 | *C3 | Q108 | A3 | | |
| D105 | A2 | IC313 | G2 | Q109 | A4 | | |
| D106 | A3 | IC314 | G1 | Q110 | *D3 | | |
| D107 | A4 | IC315 | G3 | Q600 | *C4 | | |
| D400 | D1 | IC316 | A2 | Q601 | *C4 | | |
| D401 | D1 | IC317 | H1 | Q602 | *C3 | | |
| D402 | D1 | IC318 | B1 | Q603 | *C4 | | |
| D403 | D1 | IC319 | G3 | Q604 | *C4 | | |
| D404 | E1 | IC320 | *G3 | Q605 | *C5 | | |
| D405 | E1 | IC321 | *A2 | Q606 | *D4 | | |
| D406 | *E1 | IC401 | D1 | Q607 | *D4 | | |
| D407 | *E1 | IC402 | D1 | Q608 | *D3 | | |
| D408 | *E1 | IC403 | E1 | Q609 | *D4 | | |
| D409 | *E1 | IC404 | E1 | Q610 | *D4 | | |
| D410 | *G1 | IC405 | *F1 | Q611 | *D5 | | |
| D411 | *G1 | IC406 | E1 | Q700 | *F4 | | |
| D500 | *E2 | IC407 | *E1 | Q701 | *F4 | | |
| D501 | E2 | IC408 | *F1 | Q702 | *F4 | | |
| D502 | *E2 | IC409 | E2 | Q703 | *F4 | | |
| D503 | E2 | IC410 | E1 | Q704 | *F4 | | |
| D504 | *F2 | IC500 | E2 | Q705 | *F4 | | |
| D505 | *F2 | IC501 | E3 | Q706 | G4 | | |
| D506 | *F2 | IC502 | E2 | Q707 | G4 | | |
| D507 | *F2 | IC503 | F2 | Q708 | G5 | | |
| D600 | A4 | IC504 | F2 | Q709 | G5 | | |
| D601 | B4 | IC505 | F3 | Q710 | F3 | | |
| D602 | A4 | IC506 | F3 | Q711 | F3 | | |
| D603 | B4 | IC507 | E3 | Q712 | F3 | | |
| D604 | B3 | IC508 | E3 | Q713 | F4 | | |
| D605 | B3 | IC600 | A4 | Q714 | F4 | | |
| D606 | B4 | IC601 | B4 | Q715 | F4 | | |
| D607 | B4 | IC602 | B4 | Q716 | G3 | | |
| D700 | *F4 | IC603 | B3 | | | | |
| D701 | *F4 | IC604 | B4 | RV500 | F3 | | |
| D702 | *F5 | IC605 | *B3 | RV501 | F3 | | |
| D703 | *F4 | IC606 | *B4 | RV600 | A4 | | |
| D704 | *F4 | IC607 | *B4 | RV601 | A4 | | |
| D705 | *F5 | IC608 | *D4 | | | | |
| D706 | *E4 | IC609 | *D3 | S1 | A3 | | |
| D707 | *E4 | IC610 | *D4 | S2 | A2 | | |
| D708 | *E4 | IC611 | *D4 | S3 | A3 | | |
| D709 | F4 | IC612 | *B5 | S4 | A2 | | |
| D710 | F4 | IC613 | *B3 | S11 | F4 | | |
| D711 | F4 | IC614 | *B4 | S12 | E4 | | |
| D712 | F4 | IC701 | *F4 | S21 | F4 | | |
| D713 | F4 | IC702 | *F4 | S22 | E4 | | |
| D714 | F4 | IC703 | *F5 | S31 | F5 | | |
| D715 | *G4 | | | S32 | E5 | | |
| D716 | G4 | L100 | H5 | S500 | F3 | | |
| D717 | F5 | L101 | H3 | S501 | F3 | | |
| D718 | G4 | L102 | H2 | S502 | F2 | | |
| D719 | G3 | L103 | G2 | S503 | F2 | | |
| D720 | *G4 | L104 | H2 | S600 | E4 | | |
| | | L105 | H3 | S601 | E4 | | |
| E1 | A2 | L106 | H3 | S602 | C3 | | |
| E2 | D3 | L300 | *B1 | S603 | C4 | | |
| E3 | G2 | L301 | *C1 | | | | |
| E4 | *E2 | L302 | *C2 | T700 | G4 | | |
| | | L303 | *D2 | T701 | G4 | | |
| FB100 | H2 | L304 | G3 | | | | |
| FB101 | H2 | L305 | G3 | THP100 | H4 | | |
| | | L306 | G3 | THP101 | H4 | | |
| IC100 | *H4 | L307 | G3 | THP102 | H2 | | |
| IC101 | *H3 | L400 | *D1 | THP103 | H2 | | |
| IC102 | D2 | L401 | *D1 | THP104 | H3 | | |
| IC103 | D3 | L402 | F2 | THP105 | H3 | | |
| IC104 | G2 | L403 | F1 | THP106 | H2 | | |
| IC105 | *H2 | L500 | *E2 | | | | |

CN-2672, CN-2673, CN-2674, CN-2700, CN-2718, CN-2805

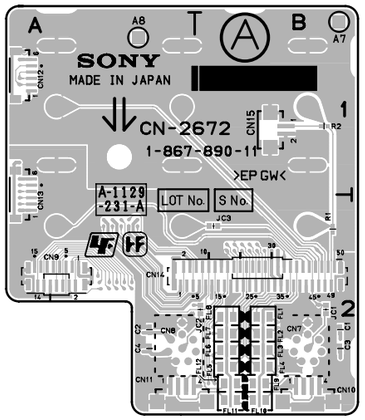


**CN-2672** -A SIDE-
SUFFIX: -11

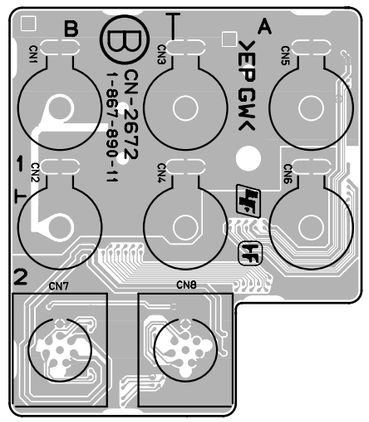


**CN-2672** -B SIDE-
SUFFIX: -11

**CN-2700** -A SIDE-
SUFFIX: -11




**CN-2700** -B SIDE-
SUFFIX: -11




**CN-2805** -A SIDE-
SUFFIX: -11




**CN-2805** -B SIDE-
SUFFIX: -11




**CN-2673** -A SIDE-
SUFFIX: -11




**CN-2673** -B SIDE-
SUFFIX: -11




**CN-2718** -A SIDE-
SUFFIX: -11




**CN-2718** -B SIDE-
SUFFIX: -11

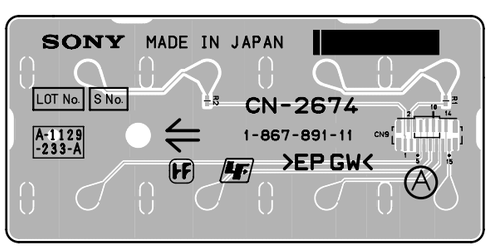


**CN-2674** -A SIDE-
SUFFIX: -11

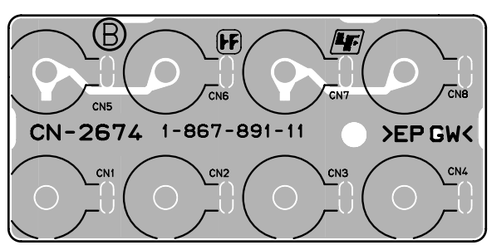


**CN-2674** -B SIDE-
SUFFIX: -11

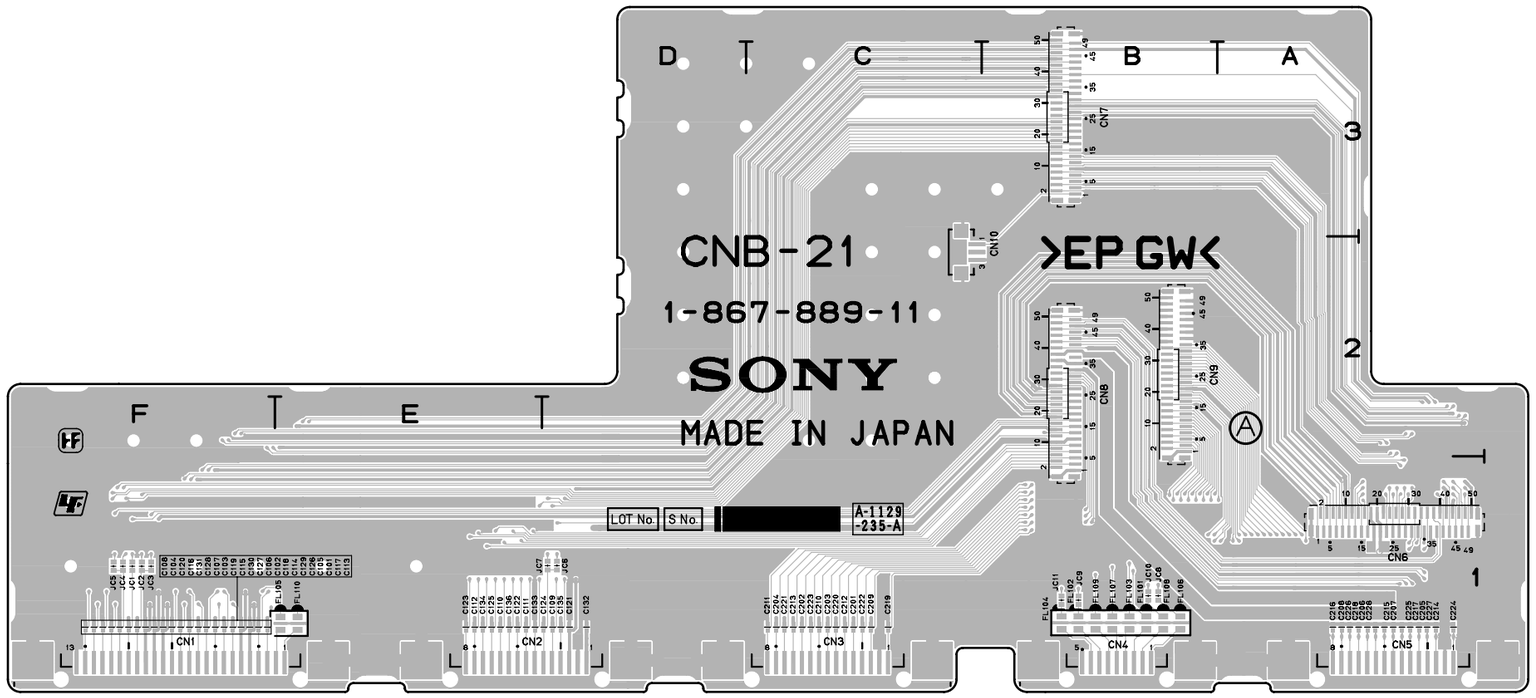


**CNB-21** -A SIDE-
SUFFIX: -11

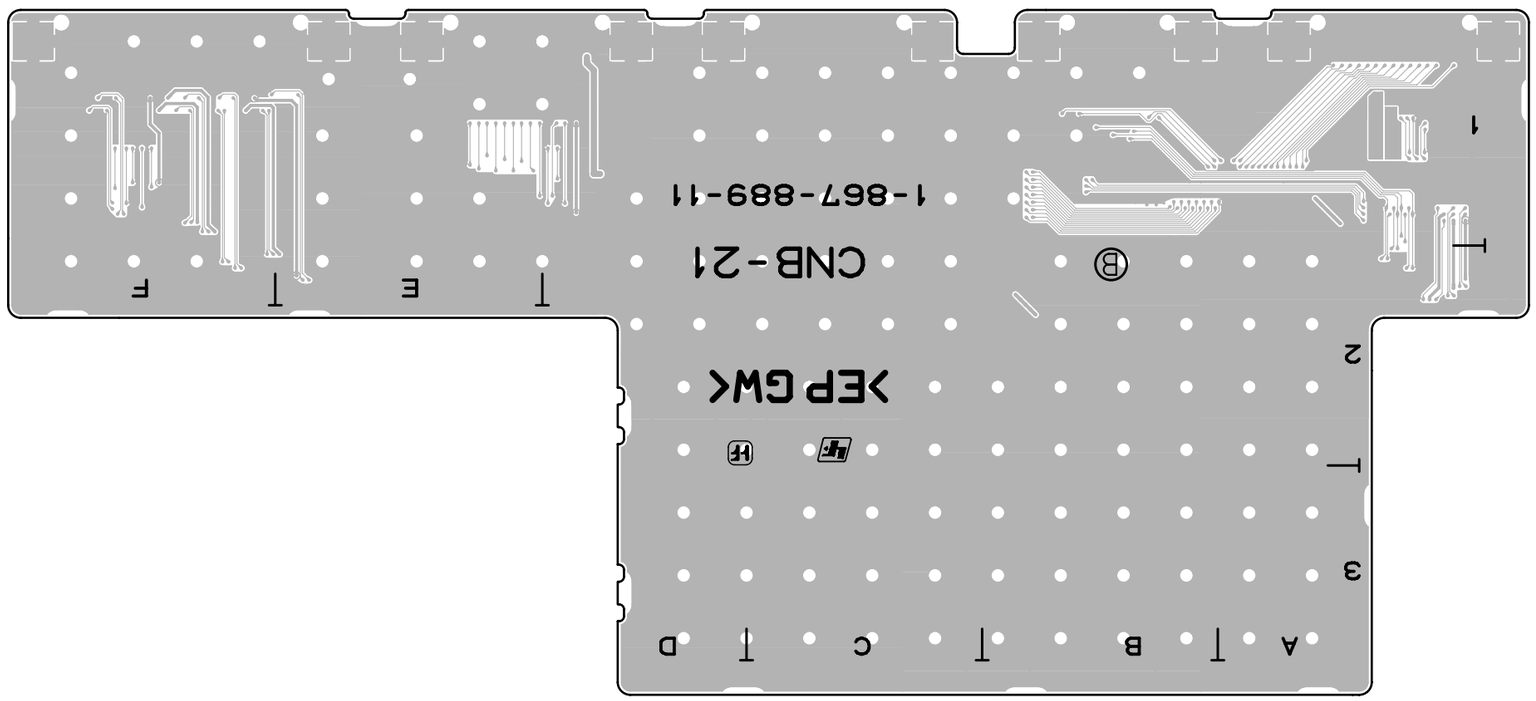


**CNB-21** -B SIDE-
SUFFIX: -11

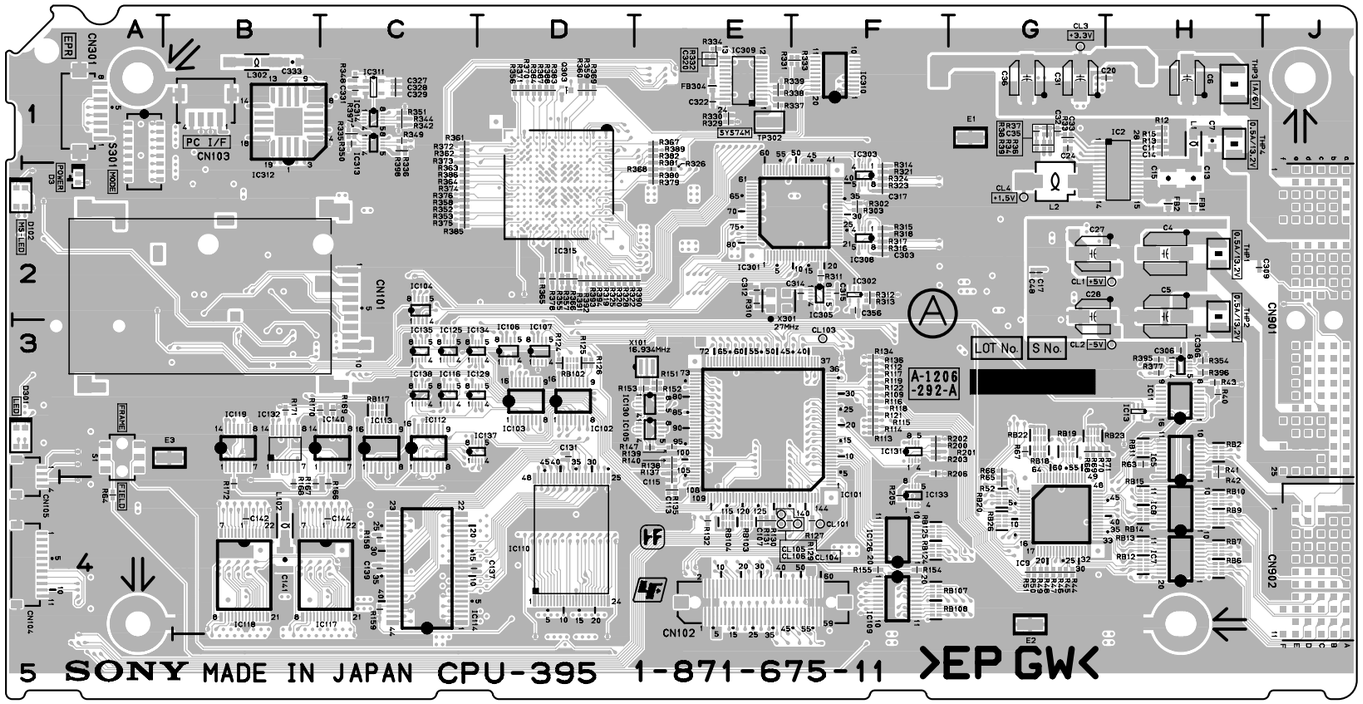


**CPU-395** -A SIDE-
SUFFIX: -11

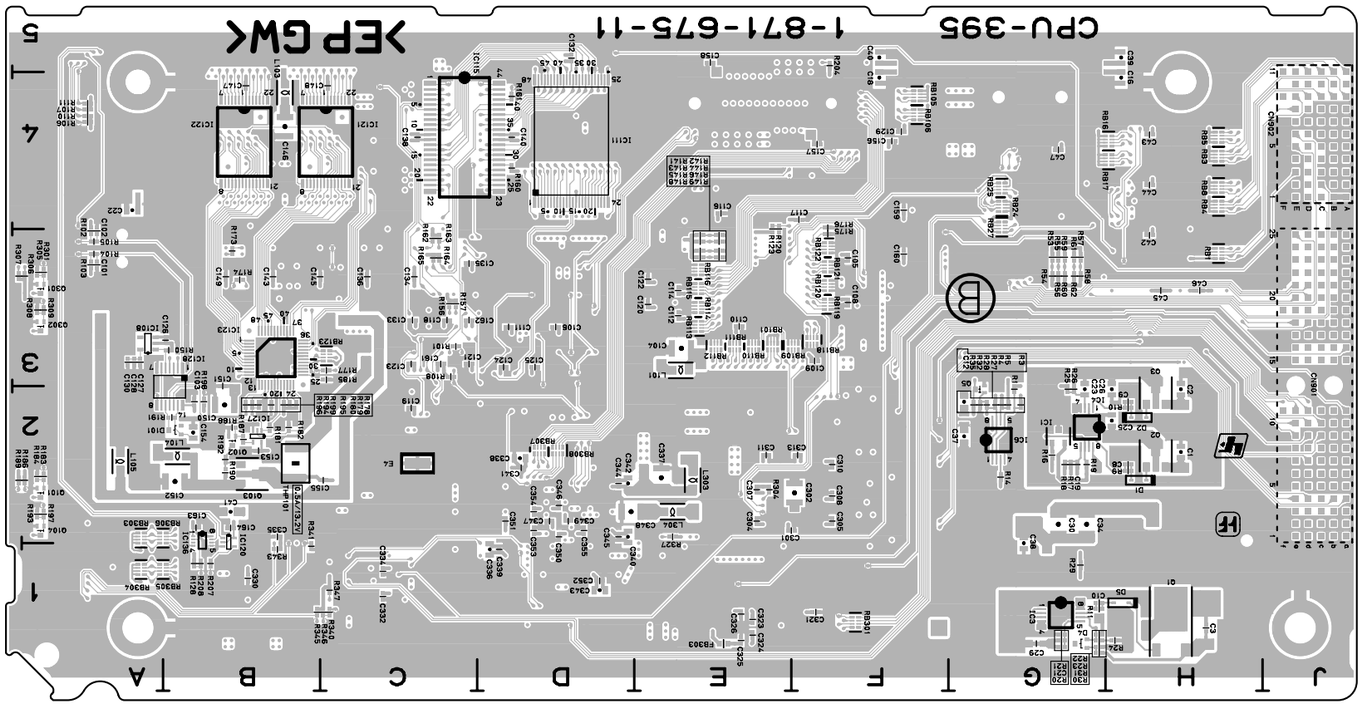


**CPU-395** -B SIDE-
SUFFIX: -11

---

CPU-395 (1-871-675-11)

---

*:B SIDE

| | | | |
|---|---|---|---|
| CL1 | H2 | IC302 | F2 |
| CL2 | H3 | IC303 | F2 |
| CL3 | G1 | IC305 | F2 |
| CL4 | G2 | IC306 | H3 |
| CL101 | F4 | IC308 | F2 |
| CL103 | F3 | IC309 | E1 |
| CL104 | F4 | IC310 | F1 |
| CL105 | E4 | IC311 | C1 |
| CL106 | E4 | IC312 | B1 |
| | | IC313 | C1 |
| CN101 | B2 | IC314 | C1 |
| CN102 | E4 | IC315 | D2 |
| CN103 | B1 | | |
| CN104 | A4 | L1 | H1 |
| CN105 | A4 | L2 | G2 |
| CN301 | A1 | L101 | *E3 |
| CN901 | J3 | L102 | B4 |
| CN902 | J5 | L103 | *B4 |
| | | L104 | *B2 |
| D1 | *H2 | L105 | *A2 |
| D2 | *H2 | L302 | B1 |
| D3 | A2 | L303 | *E2 |
| D4 | *G1 | L304 | *E2 |
| D5 | *H1 | | |
| D101 | *B2 | Q1 | *H1 |
| D102 | A2 | Q2 | *H2 |
| D301 | A3 | Q3 | *H2 |
| | | Q5 | *G2 |
| E1 | G1 | Q101 | *A2 |
| E2 | G4 | Q102 | *B2 |
| E3 | B3 | Q103 | *B2 |
| E4 | *C2 | Q104 | *A2 |
| | | Q301 | *A3 |
| FB1 | H2 | Q302 | *A3 |
| FB2 | H2 | Q303 | D1 |
| FB303 | *E1 | | |
| FB304 | E1 | S1 | A3 |
| | | S301 | A1 |
| IC1 | *G2 | | |
| IC2 | H2 | THP1 | H2 |
| IC3 | *G1 | THP2 | H2 |
| IC4 | *G2 | THP3 | H1 |
| IC5 | H4 | THP4 | H1 |
| IC6 | *G2 | THP101 | *B2 |
| IC7 | H4 | | |
| IC8 | H4 | TP302 | E1 |
| IC9 | G4 | | |
| IC11 | H3 | X101 | E3 |
| IC13 | H3 | X301 | E2 |
| IC101 | E3 | | |
| IC102 | D3 | | |
| IC103 | D3 | | |
| IC104 | C2 | | |
| IC105 | E3 | | |
| IC106 | D3 | | |
| IC107 | D3 | | |
| IC108 | *A3 | | |
| IC109 | F4 | | |
| IC110 | D4 | | |
| IC111 | *D4 | | |
| IC112 | C3 | | |
| IC113 | C3 | | |
| IC114 | C4 | | |
| IC115 | *C4 | | |
| IC116 | C3 | | |
| IC117 | C4 | | |
| IC118 | B4 | | |
| IC119 | B3 | | |
| IC120 | *B2 | | |
| IC121 | *C4 | | |
| IC122 | *B4 | | |
| IC123 | *B3 | | |
| IC125 | C3 | | |
| IC126 | F4 | | |
| IC127 | *B2 | | |
| IC128 | *B2 | | |
| IC129 | C3 | | |
| IC130 | E3 | | |
| IC131 | F3 | | |
| IC132 | B3 | | |
| IC133 | F4 | | |
| IC134 | C3 | | |
| IC135 | C3 | | |
| IC136 | *B2 | | |
| IC137 | C3 | | |
| IC138 | C3 | | |
| IC140 | B3 | | |
| IC301 | F2 | | |

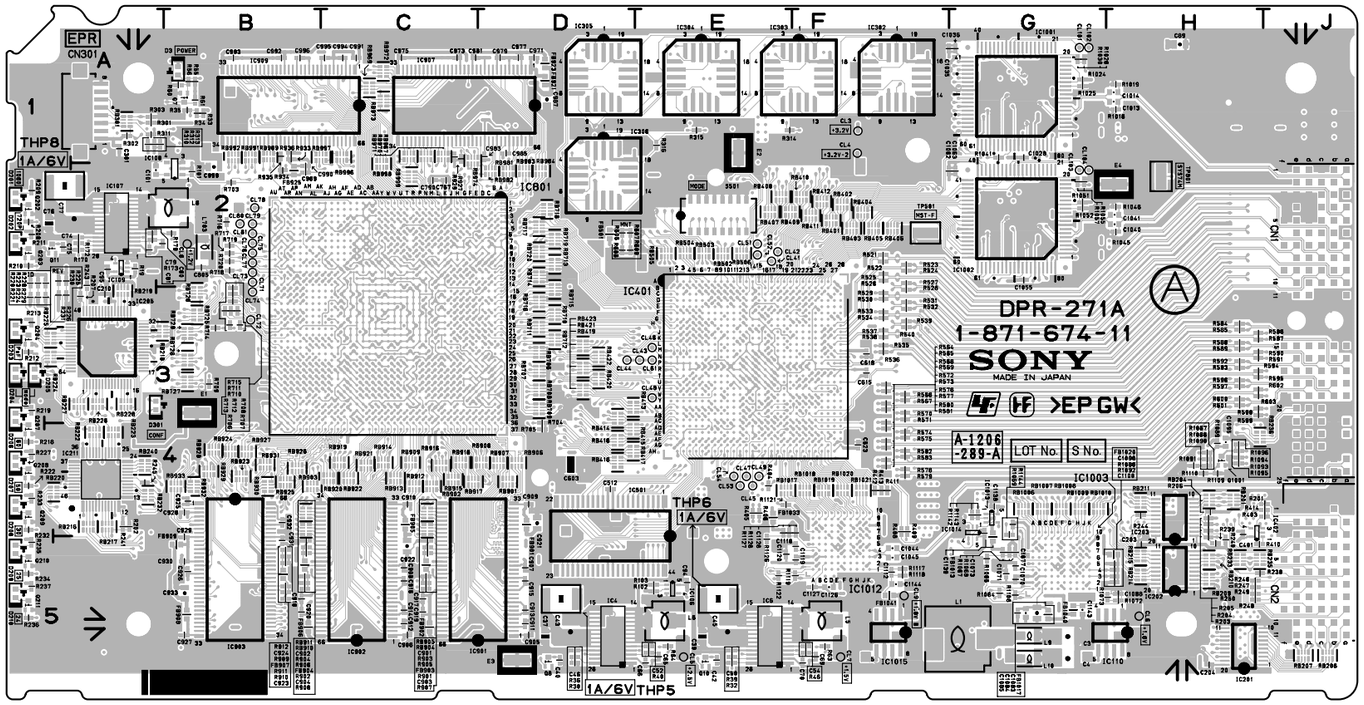


**DPR-271A** -A SIDE-
SUFFIX: -11

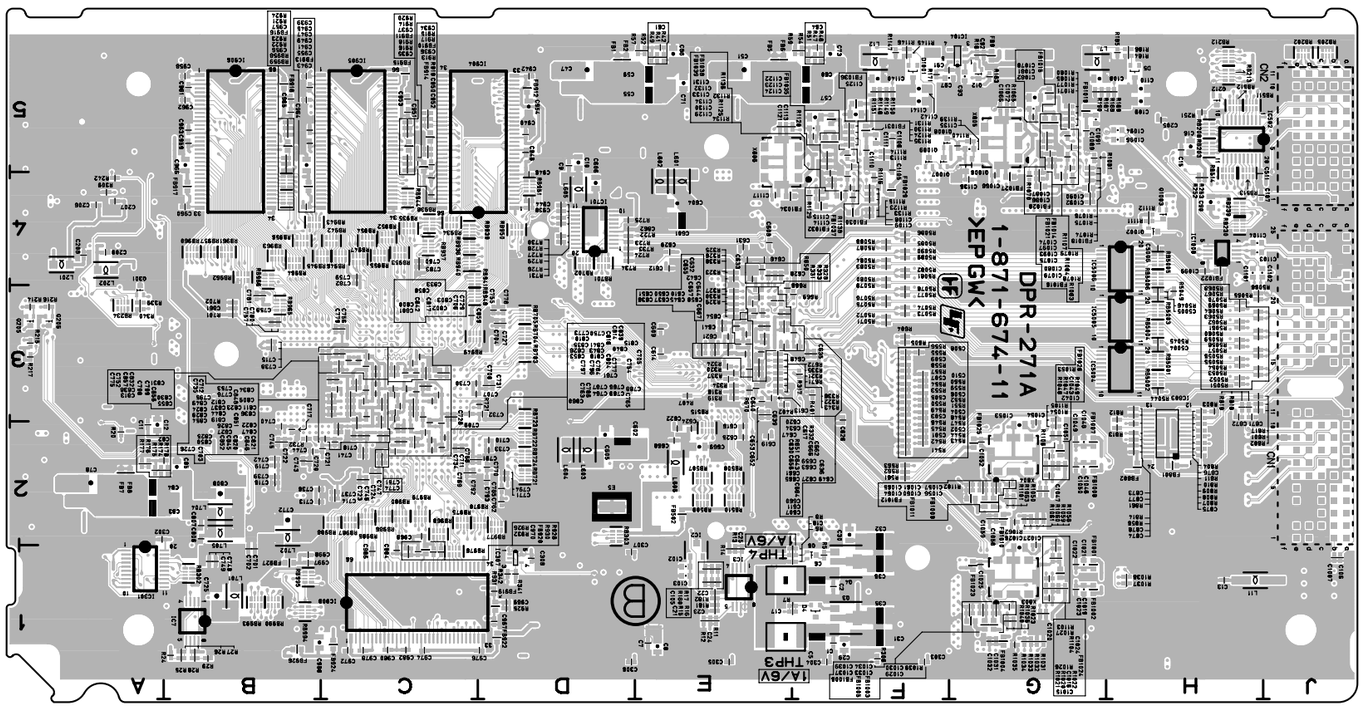


**DPR-271A** -B SIDE-
SUFFIX: -11

---
DPR-271A (1-871-674-11)
---

*:B SIDE

| | | | | | |
|---|---|---|---|---|---|
| CL3 | F1 | FB917 | *B4 | IC908 | *C1 |
| CL4 | F1 | FB918 | *B5 | IC909 | C1 |
| CL5 | E5 | FB919 | *D1 | IC1001 | G1 |
| CL6 | H5 | FB920 | *C1 | IC1002 | G2 |
| CL7 | F5 | FB921 | D1 | IC1003 | G5 |
| CL8 | B2 | FB922 | *D1 | IC1008 | *H4 |
| CL9 | F5 | FB923 | D1 | IC1012 | F5 |
| CL41 | E2 | FB924 | *C1 | IC1013 | G4 |
| CL42 | E2 | FB925 | B2 | IC1014 | G4 |
| CL43 | E3 | FB926 | *B1 | IC1015 | F5 |
| CL44 | D3 | FB927 | *B1 | IC5004 | *G3 |
| CL45 | E4 | FB1001 | *G1 | IC5005 | *G3 |
| CL46 | E3 | FB1002 | *G1 | IC5006 | *G4 |
| CL47 | E4 | FB1003 | *G1 | | |
| CL48 | E3 | FB1004 | *G1 | L1 | G5 |
| CL49 | E4 | FB1005 | *G1 | L5 | F5 |
| CL51 | E2 | FB1006 | *G1 | L6 | E5 |
| CL52 | E2 | FB1007 | *G2 | L7 | *G5 |
| CL53 | E4 | FB1008 | *G2 | L8 | B2 |
| CL54 | E4 | FB1009 | *G2 | L9 | G5 |
| CL61 | E3 | FB1010 | *G2 | L10 | G5 |
| CL71 | B2 | FB1011 | *G2 | L11 | *H1 |
| CL72 | B3 | FB1012 | *G2 | L12 | *F5 |
| CL73 | B2 | FB1013 | G5 | L201 | *A4 |
| CL74 | B3 | FB1014 | *G5 | L202 | *A4 |
| CL75 | B2 | FB1015 | *G5 | L601 | *E4 |
| CL76 | B2 | FB1016 | *G4 | L602 | *E4 |
| CL77 | B2 | FB1017 | G5 | L603 | *D2 |
| CL78 | B2 | FB1018 | *G4 | L604 | *D2 |
| CL79 | B2 | FB1019 | *G5 | L605 | *D4 |
| CL80 | B2 | FB1020 | H5 | L606 | *E2 |
| CL81 | B2 | FB1021 | *G5 | L701 | *B1 |
| CL101 | G1 | FB1022 | *H4 | L702 | *B2 |
| CL102 | G1 | FB1023 | *G1 | L703 | B2 |
| CL103 | G2 | FB1024 | *G1 | L704 | *B2 |
| CL104 | G2 | FB1025 | *G2 | L705 | *B2 |
| | | FB1026 | *G2 | | |
| CN1 | J3 | FB1027 | *G4 | Q3 | *F1 |
| CN2 | J5 | FB1028 | *G4 | Q4 | *F1 |
| CN301 | A1 | FB1029 | *F4 | Q6 | *F1 |
| | | FB1030 | *F4 | Q7 | B1 |
| D3 | B1 | FB1031 | *F5 | Q8 | D5 |
| D4 | *F1 | FB1032 | *F4 | Q10 | E5 |
| D5 | *H5 | FB1033 | E4 | Q11 | A2 |
| D201 | A2 | FB1034 | *E4 | Q12 | *G5 |
| D202 | A2 | FB1035 | *F5 | Q202 | A2 |
| D203 | A3 | FB1036 | *F5 | Q203 | A2 |
| D204 | A3 | FB1037 | *F4 | Q204 | A3 |
| D205 | A3 | FB1038 | *F5 | Q205 | *A3 |
| D206 | A3 | FB1039 | *F5 | Q206 | *A3 |
| D207 | A4 | FB1040 | G5 | Q207 | A4 |
| D208 | A4 | FB1041 | F5 | Q208 | A4 |
| D209 | A5 | | | Q209 | A4 |
| D210 | A5 | IC2 | *E1 | Q210 | A5 |
| D301 | A3 | IC3 | *E1 | Q211 | A5 |
| D1001 | *F5 | IC4 | D5 | Q212 | *H5 |
| | | IC6 | E5 | Q301 | *A3 |
| E1 | B3 | IC7 | *B1 | Q1001 | H4 |
| E2 | E1 | IC104 | *G5 | Q1002 | *H4 |
| E3 | D5 | IC106 | E5 | Q1003 | *H4 |
| E4 | H2 | IC107 | A2 | Q1006 | *G5 |
| E5 | *D2 | IC108 | B2 | Q1007 | *F5 |
| | | IC109 | A2 | Q1008 | *F5 |
| FB1 | *D5 | IC110 | H5 | Q1009 | *F5 |
| FB2 | *D5 | IC201 | H5 | | |
| FB5 | *E5 | IC202 | H5 | S501 | E2 |
| FB6 | *E5 | IC203 | H4 | | |
| FB7 | *A2 | IC205 | A3 | THP3 | *E1 |
| FB8 | *A2 | IC211 | A4 | THP4 | *E1 |
| FB9 | *G5 | IC301 | *A1 | THP5 | D5 |
| FB501 | D2 | IC302 | F1 | THP6 | E5 |
| FB502 | *E2 | IC303 | F1 | THP8 | A2 |
| FB801 | *H2 | IC304 | E1 | | |
| FB802 | *H2 | IC305 | D1 | TP501 | F2 |
| FB901 | D4 | IC306 | D2 | TP801 | H2 |
| FB902 | C5 | IC307 | *D1 | | |
| FB903 | C5 | IC401 | E3 | X803 | *G1 |
| FB904 | B5 | IC402 | H4 | X804 | *G2 |
| FB905 | C4 | IC501 | E4 | X805 | *G5 |
| FB906 | B5 | IC502 | *H5 | X806 | *E5 |
| FB907 | B5 | IC701 | *D4 | | |
| FB908 | B5 | IC801 | C3 | | |
| FB909 | B5 | IC803 | *H2 | | |
| FB910 | *C5 | IC901 | D5 | | |
| FB911 | *C5 | IC902 | C5 | | |
| FB912 | *D5 | IC903 | B4 | | |
| FB913 | *B4 | IC904 | *D4 | | |
| FB914 | *C5 | IC905 | *C5 | | |
| FB915 | *C5 | IC906 | *B5 | | |
| FB916 | *B5 | IC907 | D1 | | |

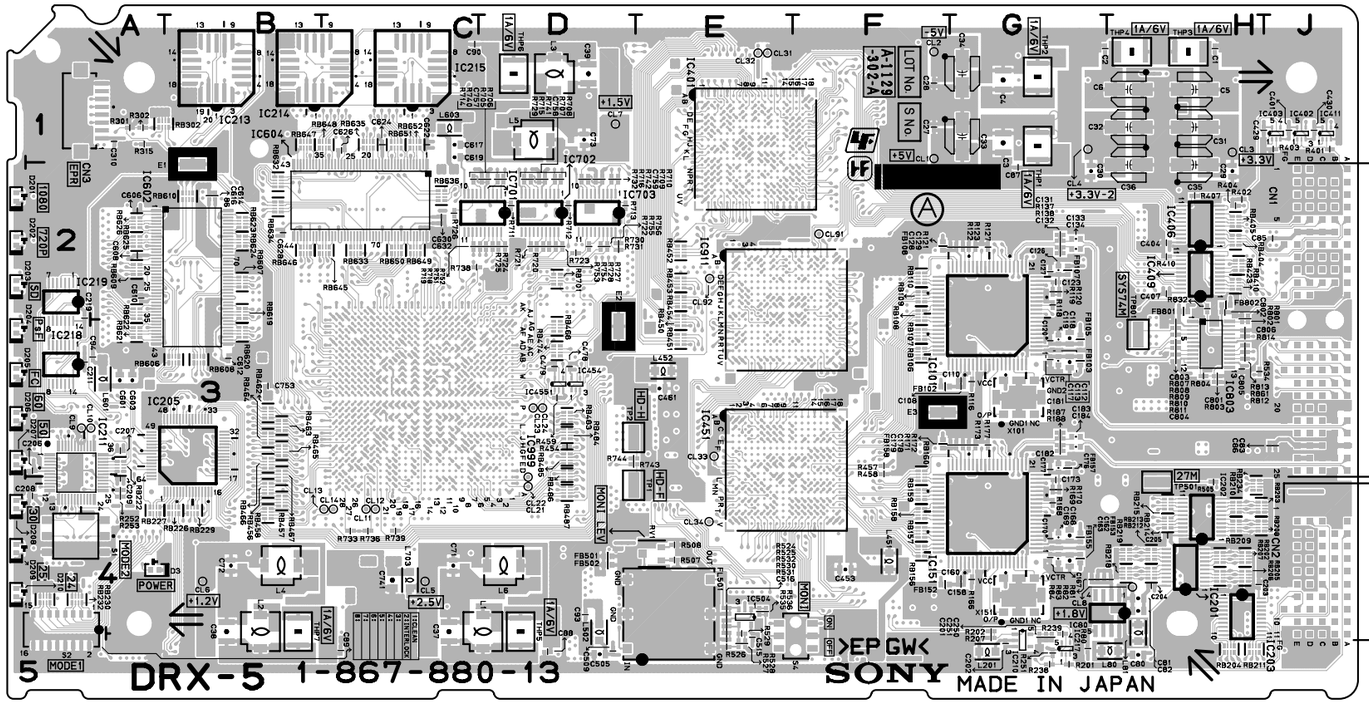


**DRX-5** -A SIDE-
SUFFIX: -13

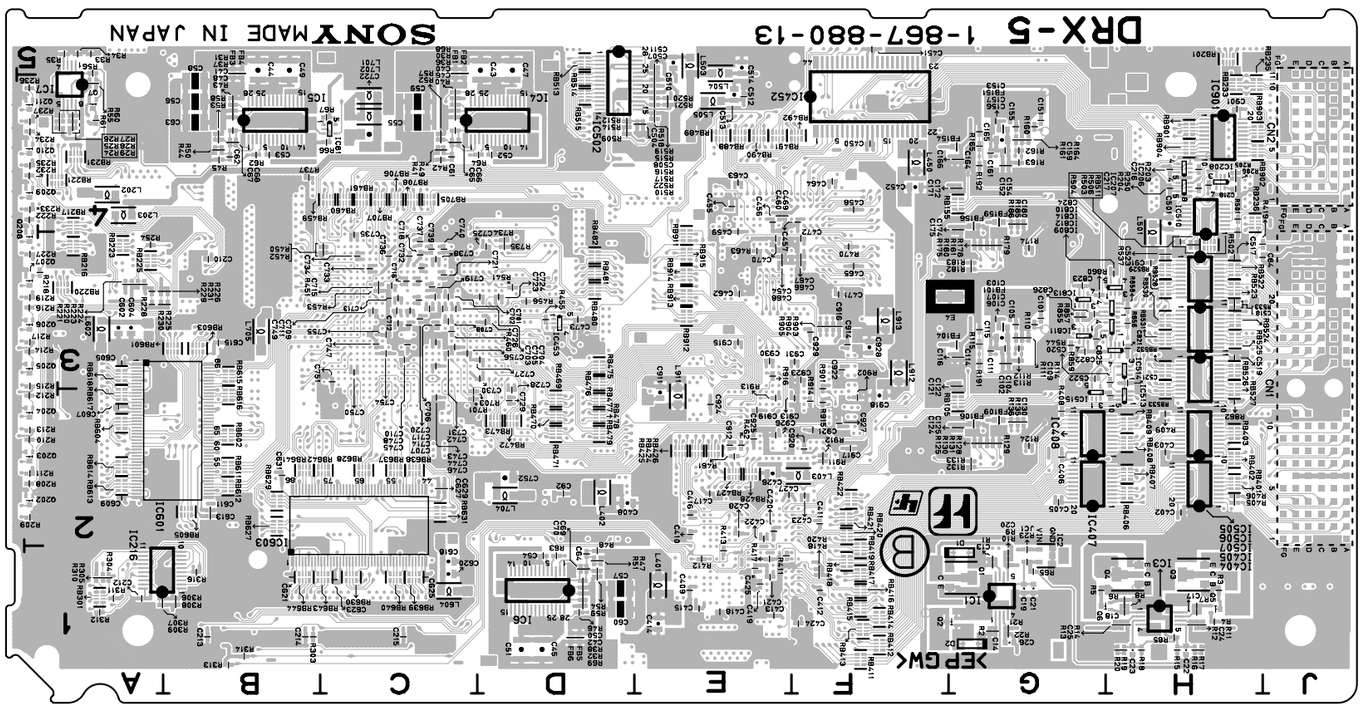


**DRX-5** -B SIDE-
SUFFIX: -13

---
DRX-5 (1-867-880-13)
---

*:B SIDE

| | | | | | |
|---|---|---|---|---|---|
| CL1 | F1 | IC201 | H4 | L912 | *F3 |
| CL2 | F1 | IC202 | H4 | L913 | *F3 |
| CL3 | H1 | IC203 | H4 | | |
| CL4 | G1 | IC205 | B3 | Q1 | *G1 |
| CL5 | C4 | IC206 | *H4 | Q2 | *G1 |
| CL6 | B4 | IC207 | *H4 | Q3 | *H1 |
| CL7 | D1 | IC208 | *H4 | Q4 | *H1 |
| CL8 | H4 | IC210 | G5 | Q5 | *H1 |
| CL9 | A3 | IC211 | A3 | Q6 | *G1 |
| CL10 | A3 | IC213 | B1 | Q7 | *A4 |
| CL11 | C4 | IC214 | B1 | Q202 | *A2 |
| CL12 | C4 | IC215 | C1 | Q203 | *A2 |
| CL13 | C4 | IC216 | *B1 | Q204 | *A2 |
| CL14 | C4 | IC217 | G5 | Q205 | *A3 |
| CL21 | D4 | IC218 | A3 | Q206 | *A3 |
| CL22 | D4 | IC219 | A2 | Q207 | *A3 |
| CL23 | D3 | IC401 | E1 | Q208 | *A3 |
| CL24 | D3 | IC402 | J1 | Q209 | *A4 |
| CL31 | E1 | IC403 | J1 | Q210 | *A4 |
| CL32 | E1 | IC404 | *H2 | Q211 | *A4 |
| CL33 | E3 | IC405 | *H2 | | |
| CL34 | E4 | IC406 | H2 | RV1 | E4 |
| CL91 | F2 | IC407 | *H2 | | |
| CL92 | E2 | IC408 | *H2 | S1 | A4 |
| | | IC409 | H2 | S2 | A4 |
| CN1 | J3 | IC411 | J1 | S4 | F5 |
| CN2 | J5 | IC451 | E3 | | |
| CN3 | A1 | IC452 | *F4 | THP1 | G1 |
| | | IC453 | *D3 | THP2 | G1 |
| D1 | *G1 | IC454 | D3 | THP3 | H1 |
| D2 | *G1 | IC455 | D3 | THP4 | H1 |
| D3 | A4 | IC502 | *D5 | THP5 | D4 |
| D201 | A2 | IC504 | E4 | THP6 | D1 |
| D202 | A2 | IC505 | *H3 | THP7 | B4 |
| D203 | A2 | IC506 | *H3 | | |
| D204 | A3 | IC507 | *H3 | TP1 | D4 |
| D205 | A3 | IC510 | *H4 | TP2 | D3 |
| D206 | A3 | IC513 | *H2 | TP501 | H4 |
| D207 | A3 | IC514 | *H3 | TP801 | H3 |
| D208 | A4 | IC515 | *G2 | | |
| D209 | A4 | IC601 | *B2 | X101 | G3 |
| D210 | A4 | IC602 | B2 | X151 | G4 |
| | | IC603 | *C2 | | |
| E1 | B2 | IC604 | C2 | | |
| E2 | D3 | IC701 | D2 | | |
| E3 | F3 | IC702 | D2 | | |
| E4 | *G3 | IC703 | D2 | | |
| | | IC803 | H3 | | |
| FB1 | *C5 | IC809 | *H3 | | |
| FB2 | *C5 | IC810 | *H3 | | |
| FB3 | *B5 | IC811 | *G3 | | |
| FB4 | *B5 | IC812 | *H3 | | |
| FB5 | *D1 | IC813 | *G3 | | |
| FB6 | *D1 | IC814 | *H3 | | |
| FB101 | *G3 | IC901 | *H4 | | |
| FB102 | F3 | IC911 | E2 | | |
| FB103 | G3 | IC999 | C3 | | |
| FB104 | *G3 | | | | |
| FB105 | G3 | L1 | D4 | | |
| FB106 | *G2 | L2 | B4 | | |
| FB107 | G2 | L3 | D1 | | |
| FB108 | F2 | L4 | B4 | | |
| FB109 | *G2 | L5 | D1 | | |
| FB151 | *G4 | L6 | D4 | | |
| FB152 | F4 | L80 | H5 | | |
| FB153 | G4 | L81 | H4 | | |
| FB154 | *G4 | L201 | G5 | | |
| FB155 | G4 | L202 | *A4 | | |
| FB156 | *G4 | L203 | *A4 | | |
| FB157 | G3 | L401 | *E1 | | |
| FB158 | F3 | L402 | *D2 | | |
| FB159 | *G4 | L403 | *F2 | | |
| FB501 | D4 | L450 | *F4 | | |
| FB502 | D4 | L451 | F4 | | |
| FB801 | H2 | L452 | E3 | | |
| FB802 | H2 | L501 | *H3 | | |
| | | L502 | D4 | | |
| FL501 | E4 | L503 | *E5 | | |
| | | L504 | *E5 | | |
| IC1 | *G1 | L505 | *E4 | | |
| IC2 | *G1 | L601 | A3 | | |
| IC3 | *H1 | L602 | *A3 | | |
| IC4 | *C4 | L603 | C1 | | |
| IC5 | *B4 | L604 | *C1 | | |
| IC6 | *D1 | L701 | *C4 | | |
| IC7 | *A5 | L702 | *C4 | | |
| IC80 | H4 | L703 | C4 | | |
| IC81 | *C4 | L704 | *D2 | | |
| IC101 | G2 | L705 | *B3 | | |
| IC151 | G4 | L911 | *E2 | | |

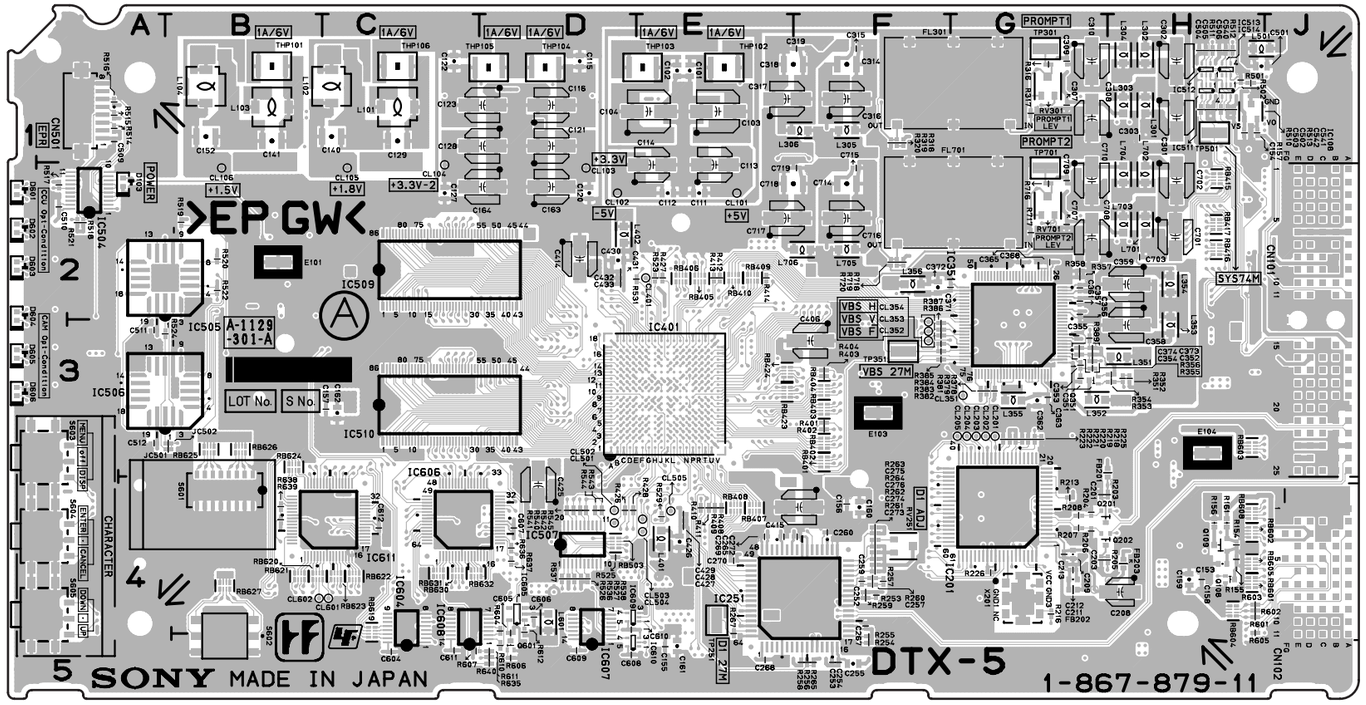


**DTX-5** -A SIDE-
SUFFIX: -11

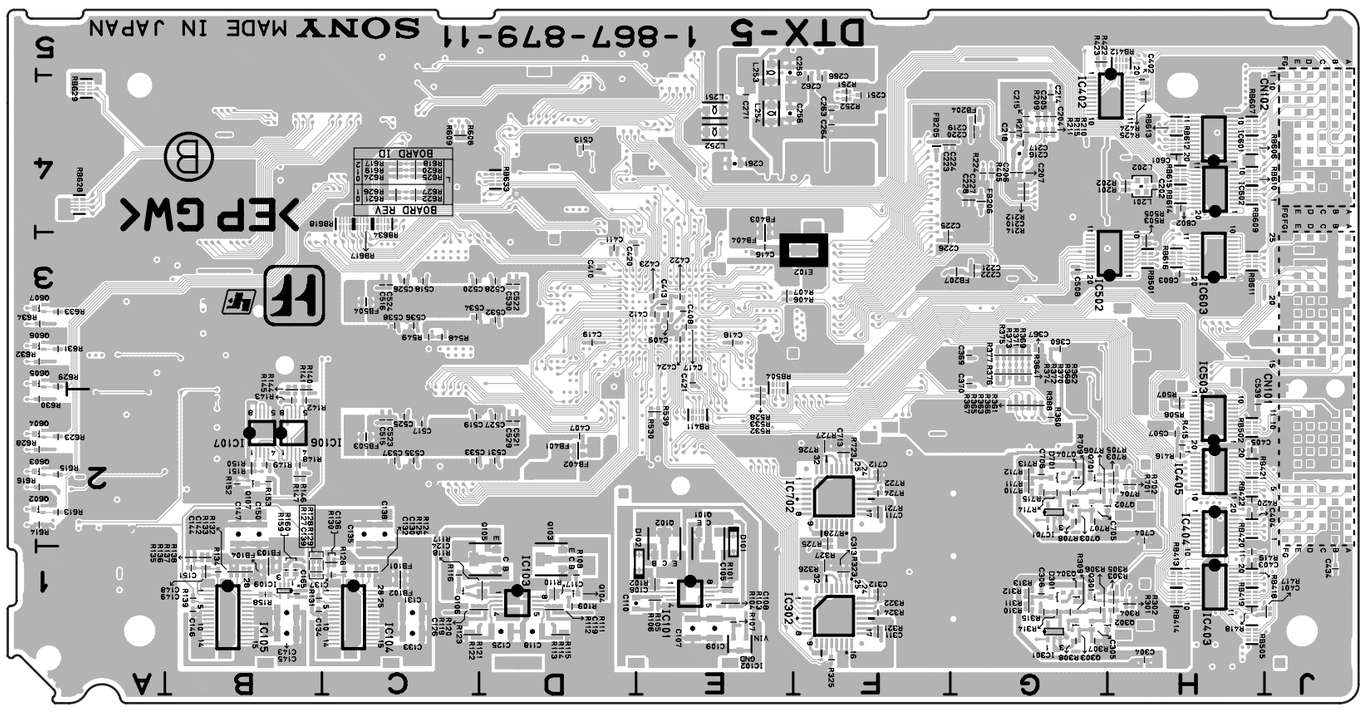


**DTX-5** -B SIDE-
SUFFIX: -11

---
DTX-5 (1-867-879-11)
---

*:B SIDE

| | | | | | |
|---|---|---|---|---|---|
| CL101 | E2 | IC509 | C2 | THP101 | B1 |
| CL102 | D2 | IC510 | C3 | THP102 | E1 |
| CL103 | D2 | IC511 | H1 | THP103 | E1 |
| CL104 | C2 | IC512 | H1 | THP104 | D1 |
| CL105 | C2 | IC513 | H1 | THP105 | D1 |
| CL106 | B2 | IC514 | H1 | THP106 | C1 |
| CL201 | G3 | IC601 | *H4 | | |
| CL202 | G3 | IC602 | *H4 | TP251 | E4 |
| CL203 | G3 | IC603 | *H3 | TP301 | G1 |
| CL204 | G3 | IC604 | C5 | TP351 | F3 |
| CL205 | G3 | IC605 | D4 | TP501 | H1 |
| CL351 | G3 | IC606 | C4 | TP701 | G2 |
| CL352 | F3 | IC607 | D5 | | |
| CL353 | F3 | IC608 | D5 | X201 | G4 |
| CL354 | F3 | IC609 | D4 | | |
| CL401 | E2 | IC610 | D5 | | |
| CL501 | D4 | IC611 | C4 | | |
| CL502 | D4 | IC701 | *G2 | | |
| CL503 | E4 | IC702 | *F2 | | |
| CL504 | E4 | | | | |
| CL505 | E4 | L101 | C1 | | |
| CL601 | C4 | L102 | C1 | | |
| CL602 | B4 | L103 | B1 | | |
| | | L104 | B1 | | |
| CN101 | J3 | L201 | *H4 | | |
| CN102 | J5 | L202 | *H4 | | |
| CN501 | A1 | L251 | *E4 | | |
| | | L252 | *E4 | | |
| D101 | *E2 | L253 | *E5 | | |
| D102 | *E1 | L254 | *E4 | | |
| D103 | A2 | L301 | H1 | | |
| D301 | *G1 | L302 | H1 | | |
| D601 | A2 | L303 | H1 | | |
| D602 | A2 | L304 | H1 | | |
| D603 | A2 | L305 | F1 | | |
| D604 | A2 | L306 | F1 | | |
| D605 | A3 | L351 | H3 | | |
| D606 | A3 | L352 | G3 | | |
| D701 | *G2 | L353 | H3 | | |
| | | L354 | H2 | | |
| E101 | B2 | L355 | G3 | | |
| E102 | *F3 | L356 | F2 | | |
| E103 | F3 | L401 | E4 | | |
| E104 | H3 | L402 | D2 | | |
| | | L501 | H1 | | |
| FB101 | *C1 | L601 | D4 | | |
| FB102 | *C1 | L701 | H2 | | |
| FB103 | *B1 | L702 | H2 | | |
| FB104 | *B1 | L703 | H2 | | |
| FB201 | G3 | L704 | H2 | | |
| FB202 | G4 | L705 | F2 | | |
| FB203 | H4 | L706 | F2 | | |
| FB204 | *G4 | | | | |
| FB205 | *F4 | Q101 | *E2 | | |
| FB206 | *G4 | Q102 | *E2 | | |
| FB207 | *G3 | Q103 | *D1 | | |
| FB401 | *D2 | Q104 | *D1 | | |
| FB402 | *D2 | Q105 | *D1 | | |
| FB403 | *E4 | Q106 | *C1 | | |
| FB404 | *E3 | Q107 | *B2 | | |
| FB503 | *C2 | Q108 | H4 | | |
| FB504 | *C3 | Q109 | H4 | | |
| | | Q201 | G4 | | |
| FL301 | G1 | Q202 | G4 | | |
| FL701 | G2 | Q301 | *G1 | | |
| | | Q302 | *G1 | | |
| IC101 | *E1 | Q303 | *G1 | | |
| IC102 | *E1 | Q304 | *G1 | | |
| IC103 | *D1 | Q351 | G3 | | |
| IC104 | *C1 | Q601 | D5 | | |
| IC105 | *B1 | Q602 | *A2 | | |
| IC106 | *B2 | Q603 | *A2 | | |
| IC107 | *B2 | Q604 | *A2 | | |
| IC108 | H1 | Q605 | *A3 | | |
| IC109 | *B1 | Q606 | *A3 | | |
| IC201 | G4 | Q607 | *A3 | | |
| IC251 | F4 | Q701 | *G2 | | |
| IC301 | *G1 | Q702 | *G2 | | |
| IC302 | *F1 | Q703 | *G2 | | |
| IC351 | G3 | Q704 | *G2 | | |
| IC401 | E3 | | | | |
| IC402 | *G4 | RV251 | F4 | | |
| IC403 | *H1 | RV301 | G1 | | |
| IC404 | *H2 | RV701 | G2 | | |
| IC405 | *H2 | | | | |
| IC502 | *H3 | S601 | B4 | | |
| IC503 | *H2 | S602 | B5 | | |
| IC504 | A2 | S603 | A3 | | |
| IC505 | A2 | S604 | A4 | | |
| IC506 | A3 | S605 | A4 | | |
| IC507 | D4 | | | | |

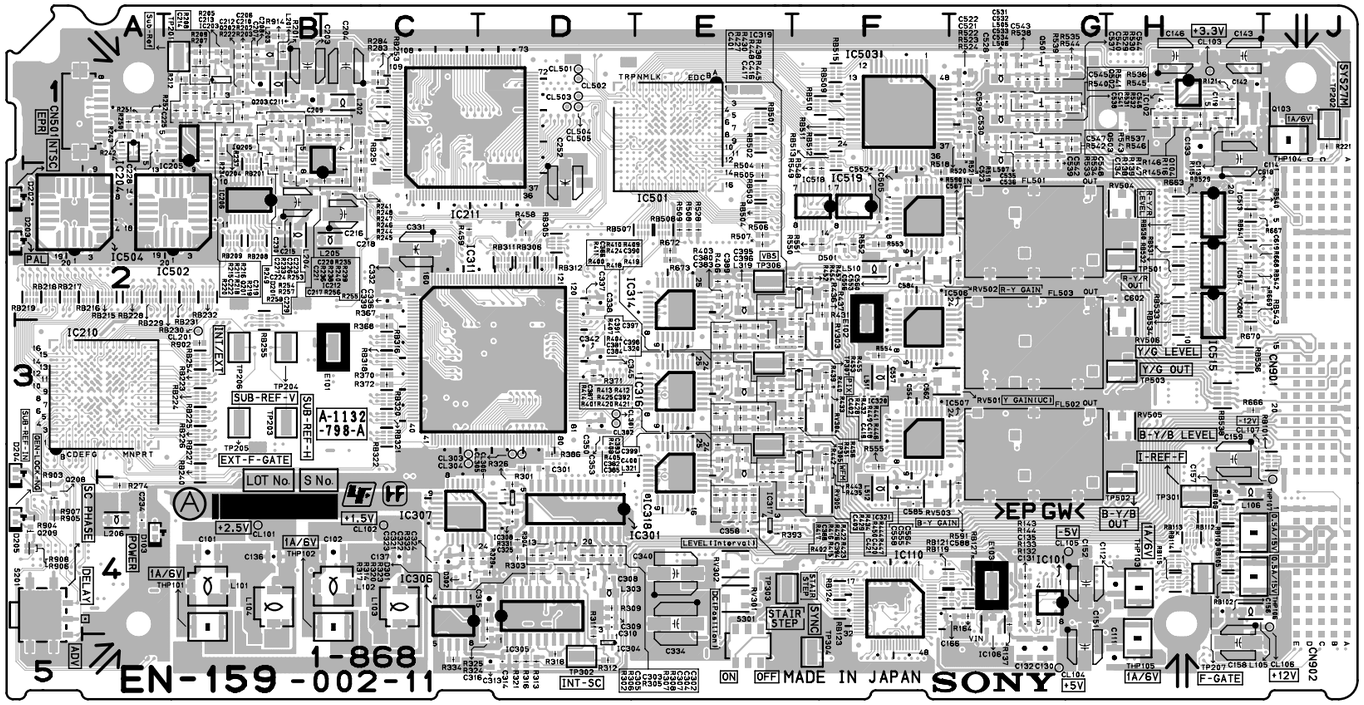


**EN-159** -A SIDE-
SUFFIX: -11

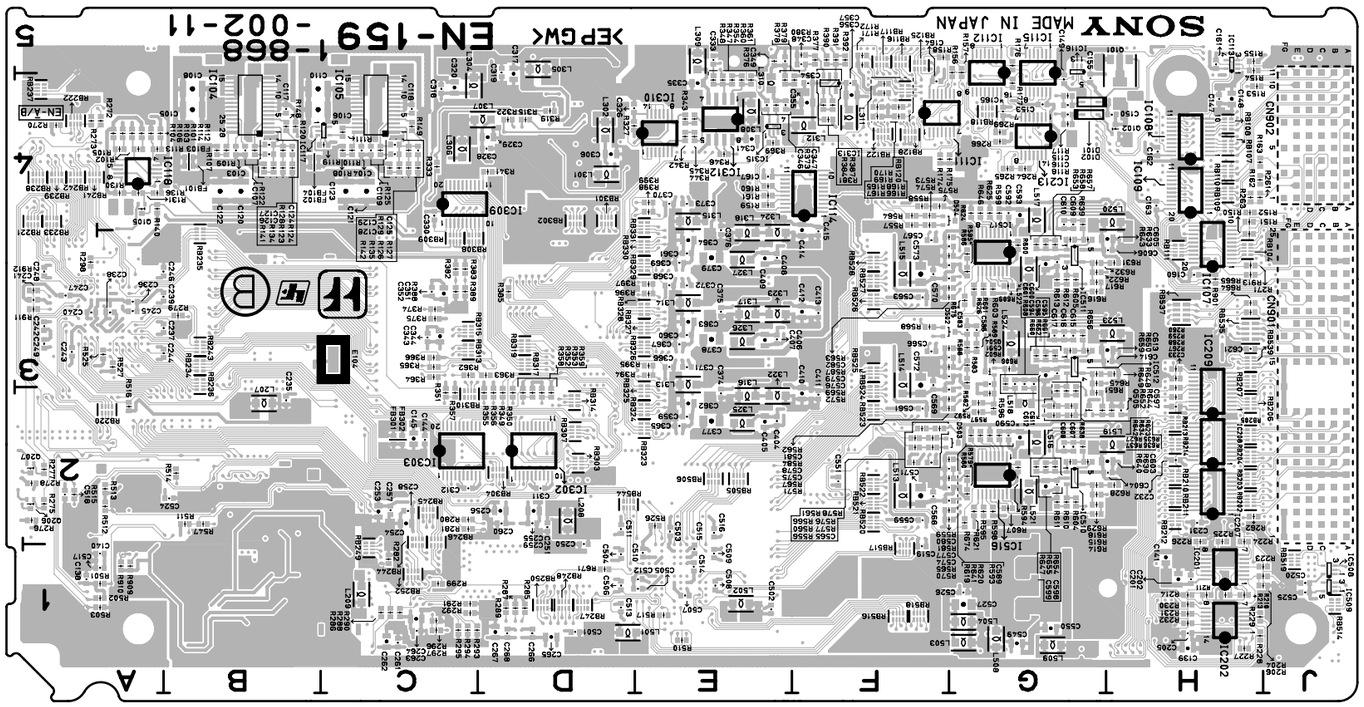


**EN-159** -B SIDE-
SUFFIX: -11

---

EN-159 (1-868-002-11)

*:B SIDE

| | | | | | |
|---|---|---|---|---|---|
| CL101 | B4 | IC306 | C4 | L513 | *F2 |
| CL102 | C4 | IC307 | C4 | L514 | *F3 |
| CL103 | H1 | IC308 | D4 | L515 | *F3 |
| CL104 | G5 | IC309 | *C4 | L516 | *G2 |
| CL105 | G4 | IC310 | *E4 | L517 | *G4 |
| CL106 | J4 | IC311 | D3 | L518 | *G2 |
| CL107 | J4 | IC312 | *E4 | L519 | *H2 |
| CL201 | B3 | IC313 | *F4 | L520 | *H4 |
| CL301 | D3 | IC314 | E2 | L521 | *G2 |
| CL302 | D3 | IC315 | *E4 | L522 | *G3 |
| CL303 | C3 | IC316 | E3 | L523 | *H3 |
| CL304 | C3 | IC317 | E4 | L524 | *G3 |
| CL305 | D3 | IC318 | E3 | | |
| CL306 | D3 | IC319 | F2 | Q101 | *H5 |
| CL501 | D1 | IC320 | F3 | Q102 | *H4 |
| CL502 | D1 | IC321 | F3 | Q103 | H1 |
| CL503 | D1 | IC501 | E1 | Q104 | H1 |
| CL504 | D1 | IC502 | B2 | Q105 | *A4 |
| CL505 | D1 | IC503 | F1 | Q201 | B1 |
| | | IC504 | A2 | Q202 | B1 |
| CN501 | A1 | IC505 | F2 | Q203 | B1 |
| CN901 | J3 | IC506 | F3 | Q204 | B1 |
| CN902 | J5 | IC507 | F3 | Q205 | B1 |
| | | IC508 | *J1 | Q206 | *A2 |
| D101 | *G4 | IC509 | *J1 | Q207 | *A2 |
| D102 | *G4 | IC510 | *G2 | Q208 | A4 |
| D103 | A4 | IC511 | *G3 | Q209 | A4 |
| D201 | B1 | IC512 | *G3 | Q501 | G1 |
| D202 | A2 | IC513 | H2 | Q502 | G1 |
| D203 | A2 | IC514 | H2 | Q503 | G1 |
| D204 | A3 | IC515 | H2 | Q504 | *G3 |
| D205 | A4 | IC516 | *G2 | Q505 | *G2 |
| D301 | D4 | IC517 | *G3 | | |
| D302 | C4 | IC518 | F2 | RV301 | E4 |
| D501 | F2 | IC519 | F2 | RV302 | E4 |
| D502 | *F3 | | | RV303 | F3 |
| D503 | *G2 | L101 | B4 | RV304 | F3 |
| D504 | *F4 | L102 | C4 | RV305 | F4 |
| | | L103 | C4 | RV501 | F3 |
| E101 | C3 | L104 | B4 | RV502 | F2 |
| E102 | F2 | L105 | H4 | RV503 | F4 |
| E103 | G4 | L106 | H4 | RV504 | H2 |
| E104 | *C3 | L201 | B1 | RV505 | H3 |
| | | L202 | C1 | RV506 | H3 |
| FB101 | *B4 | L203 | B1 | | |
| FB102 | *B4 | L204 | B2 | S201 | A4 |
| FB103 | *B4 | L205 | C2 | S301 | E5 |
| FB104 | *B4 | L206 | A4 | | |
| FB301 | *C2 | L207 | *B2 | THP101 | B4 |
| FB302 | *C2 | L208 | *D2 | THP102 | C4 |
| | | L209 | *C1 | THP103 | H4 |
| FL501 | G2 | L301 | *D4 | THP104 | J1 |
| FL502 | G3 | L302 | *D4 | THP105 | H5 |
| FL503 | G3 | L303 | D4 | THP106 | H4 |
| | | L304 | *C4 | THP107 | H4 |
| IC101 | G4 | L305 | *D5 | | |
| IC102 | H1 | L306 | *C4 | TP201 | B1 |
| IC104 | *B4 | L307 | *D4 | TP202 | J1 |
| IC105 | *C4 | L308 | *E4 | TP203 | B3 |
| IC106 | G4 | L309 | *E5 | TP204 | B3 |
| IC107 | *H3 | L310 | *E4 | TP205 | B3 |
| IC108 | *H4 | L311 | *F4 | TP206 | B3 |
| IC109 | *H4 | L312 | *F4 | TP207 | H4 |
| IC110 | F4 | L313 | *E3 | TP301 | H4 |
| IC111 | *F4 | L314 | *E3 | TP302 | D5 |
| IC112 | *G5 | L315 | *E4 | TP303 | E4 |
| IC113 | *H5 | L316 | *E2 | TP304 | F5 |
| IC114 | *F4 | L317 | *E3 | TP305 | E3 |
| IC115 | *G5 | L318 | *E3 | TP306 | E2 |
| IC116 | *G5 | L319 | E2 | TP307 | E3 |
| IC117 | *C4 | L320 | E3 | TP501 | H2 |
| IC118 | *A4 | L321 | E3 | TP502 | H4 |
| IC201 | *H1 | L322 | *E2 | TP503 | H3 |
| IC202 | *H1 | L323 | *E3 | | |
| IC203 | B1 | L324 | *E3 | | |
| IC204 | A1 | L325 | *E2 | | |
| IC205 | B1 | L326 | *E3 | | |
| IC206 | B2 | L327 | *E3 | | |
| IC207 | *H2 | L501 | *D1 | | |
| IC208 | *H2 | L502 | *E1 | | |
| IC209 | *H2 | L503 | *G1 | | |
| IC210 | A3 | L504 | *G1 | | |
| IC211 | C1 | L505 | G1 | | |
| IC212 | C2 | L506 | G1 | | |
| IC213 | *G4 | L507 | G1 | | |
| IC301 | D4 | L508 | *G1 | | |
| IC302 | *D2 | L509 | *G1 | | |
| IC303 | *C2 | L510 | F2 | | |
| IC304 | D5 | L511 | F3 | | |
| IC305 | D5 | L512 | F4 | | |

HIF-25, HIF-26

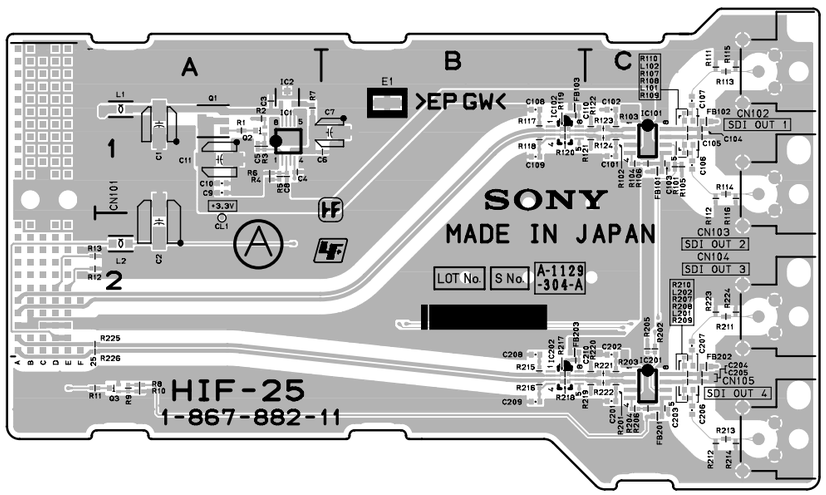


**HIF-25** -A SIDE-
SUFFIX: -11

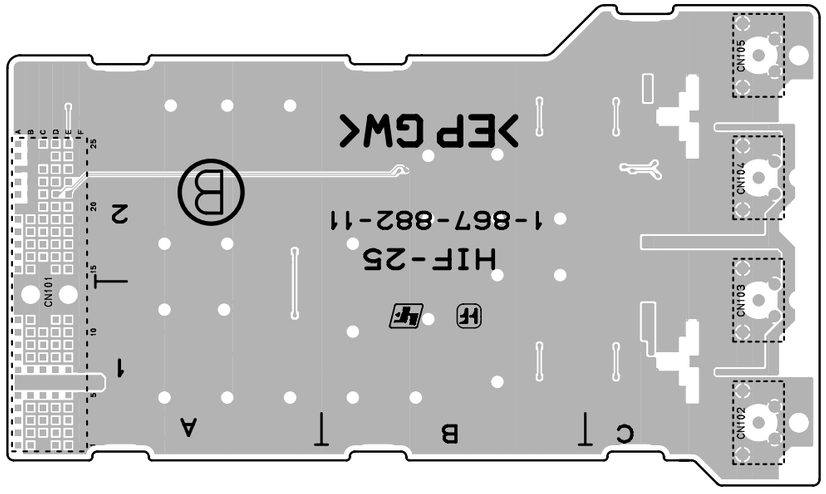


**HIF-25** -B SIDE-
SUFFIX: -11

HIF-25 (1-867-882-11)

| | |
|---|---|
| CL1 | A2 |
| CN101 | A1 |
| CN102 | C1 |
| CN103 | C1 |
| CN104 | C2 |
| CN105 | C2 |
| E1 | B1 |
| FB101 | C1 |
| FB102 | C1 |
| FB103 | B1 |
| FB201 | C2 |
| FB202 | C2 |
| FB203 | B2 |
| IC1 | A1 |
| IC2 | A1 |
| IC101 | C1 |
| IC102 | B1 |
| IC201 | C2 |
| IC202 | B2 |
| L1 | A1 |
| L2 | A2 |
| L101 | C1 |
| L102 | C1 |
| L201 | C2 |
| L202 | C2 |
| Q1 | A1 |
| Q2 | A1 |
| Q3 | A2 |

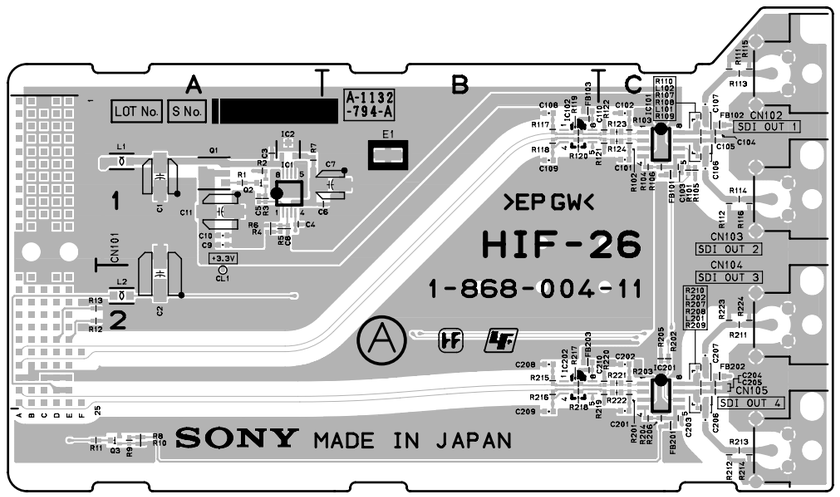


**HIF-26** -A SIDE-
SUFFIX: -11

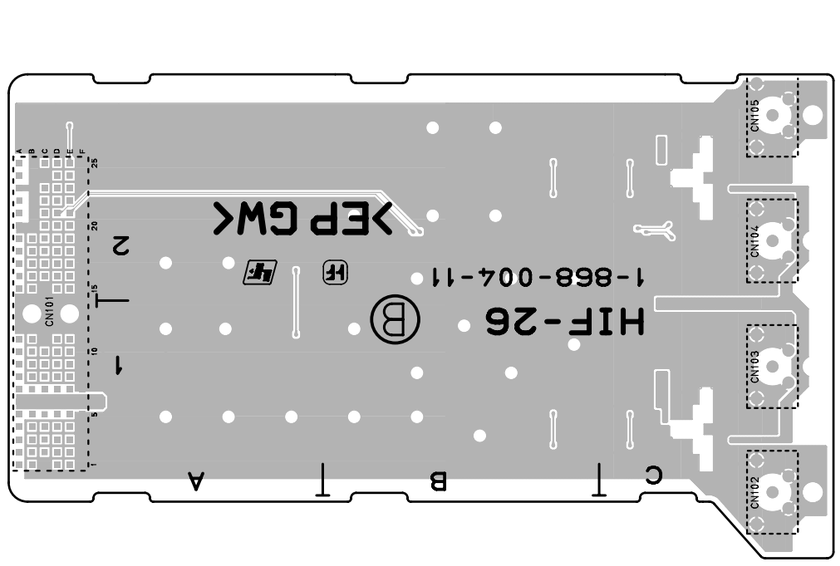


**HIF-26** -B SIDE-
SUFFIX: -11

HIF-26 (1-868-004-11)

| | |
|---|---|
| CL1 | A2 |
| CN101 | A1 |
| CN102 | C1 |
| CN103 | C1 |
| CN104 | C2 |
| CN105 | C2 |
| E1 | B1 |
| FB101 | C1 |
| FB102 | C1 |
| FB103 | B1 |
| FB201 | C2 |
| FB202 | C2 |
| FB203 | B2 |
| IC1 | A1 |
| IC2 | A1 |
| IC101 | C1 |
| IC102 | B1 |
| IC201 | C2 |
| IC202 | B2 |
| L1 | A1 |
| L2 | A2 |
| L101 | C1 |
| L102 | C1 |
| L201 | C2 |
| L202 | C2 |
| Q1 | A1 |
| Q2 | A1 |
| Q3 | A2 |


8-12

HIF-27, MB-1073

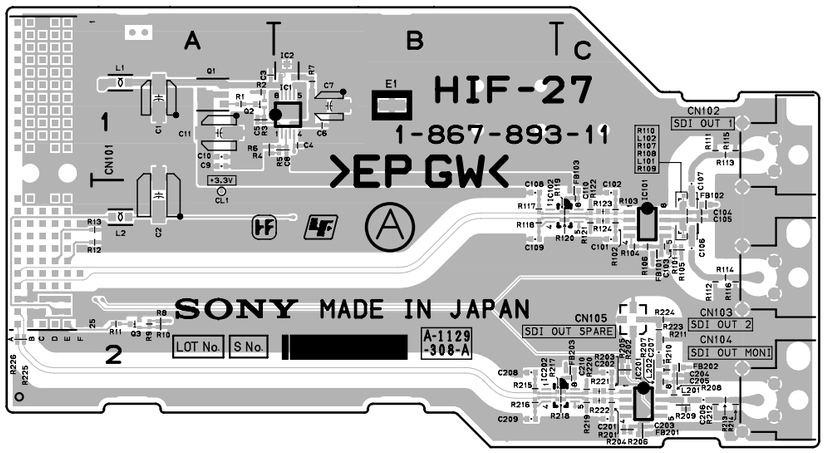


**HIF-27** -A SIDE-
SUFFIX: -11

```
-------------------
HIF-27 (1-867-893-11)
-------------------

CL1     A2

CN101   A1
CN102   C1
CN103   C2
CN104   C2
CN105   C2

E1      B1

FB101   C2
FB102   C2
FB103   C2
FB201   C2
FB202   C2
FB203   C2

IC1     B1
IC2     B1
IC101   C2
IC102   B2
IC201   C2
IC202   B2

L1      A1
L2      A2
L101    C2
L102    C2
L201    C2
L202    C2

Q1      A1
Q2      A1
Q3      A2
```

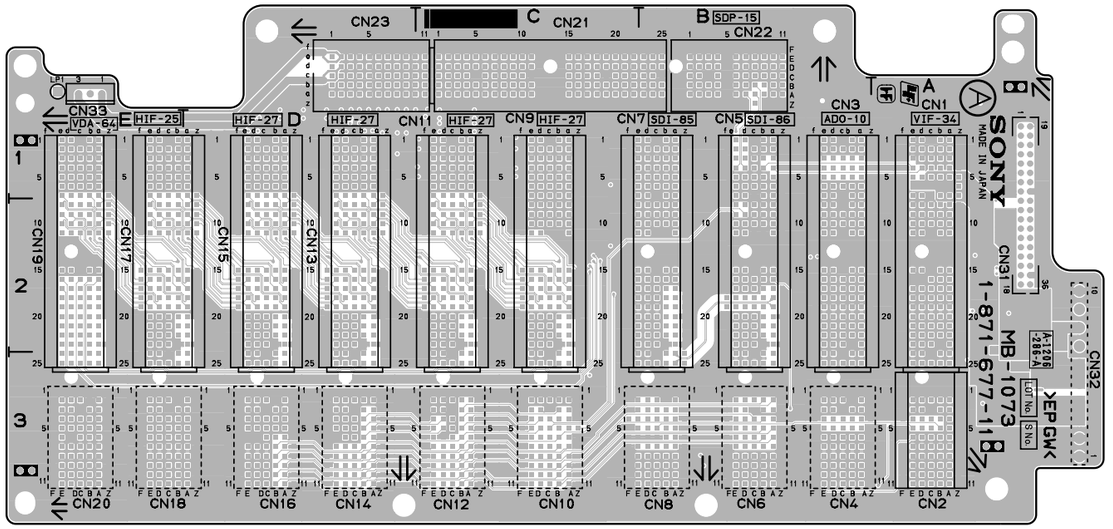


**MB-1073** -A SIDE-
SUFFIX: -11

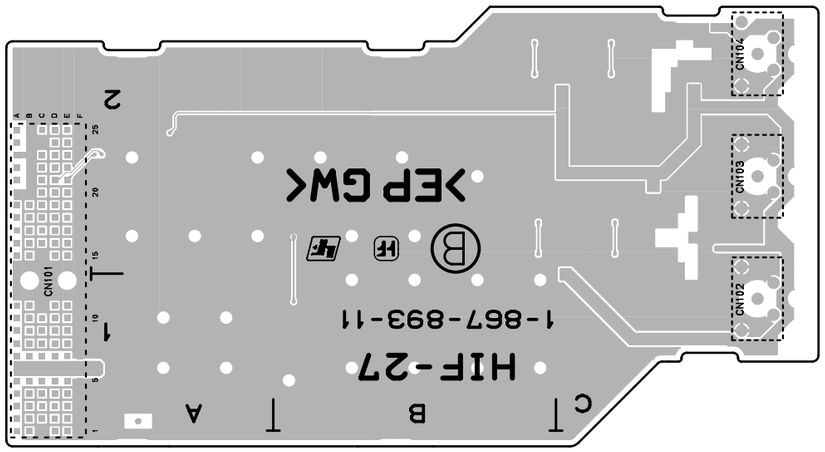


**HIF-27** -B SIDE-
SUFFIX: -11

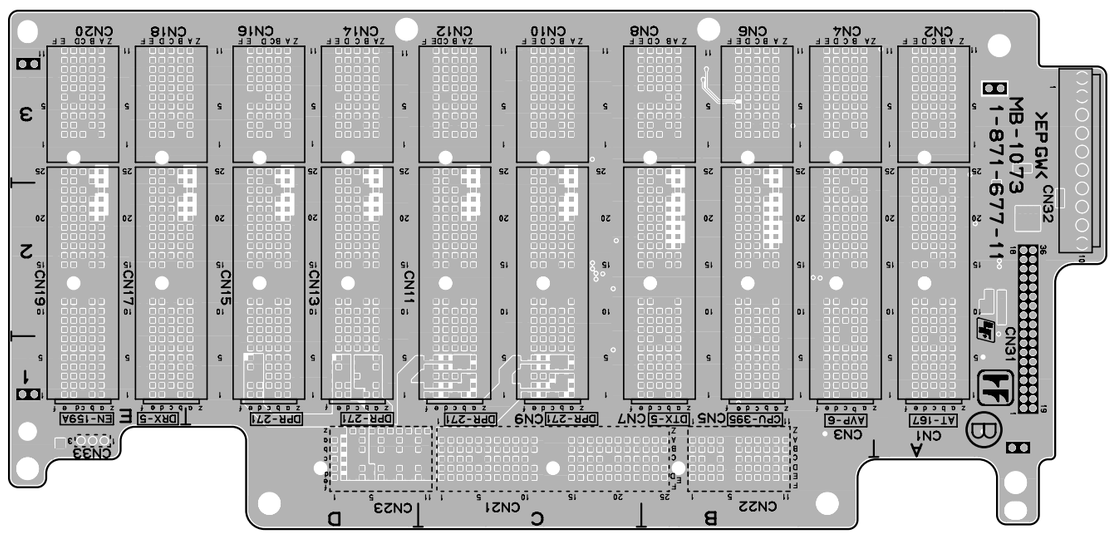


**MB-1073** -B SIDE-
SUFFIX: -11

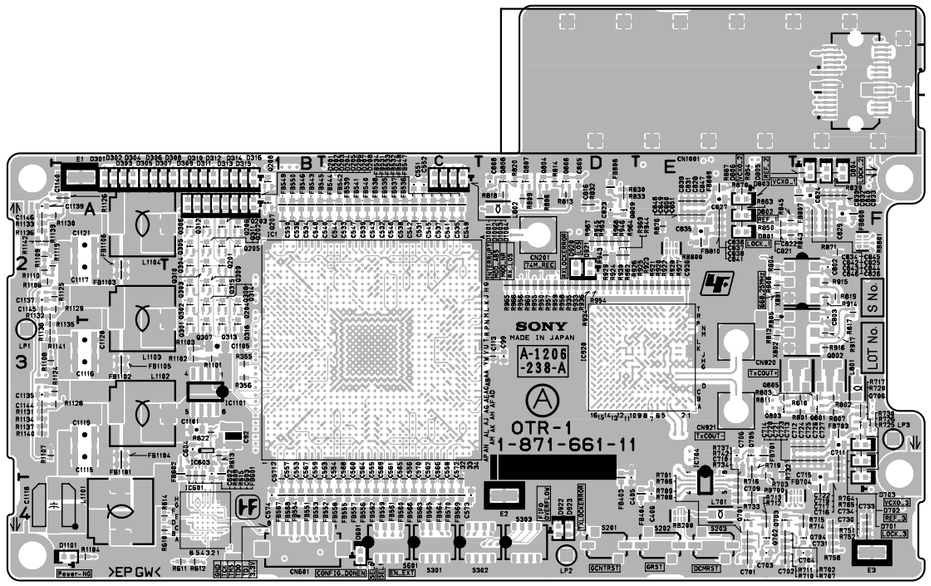


**OTR-1** -A SIDE-
SUFFIX: -11

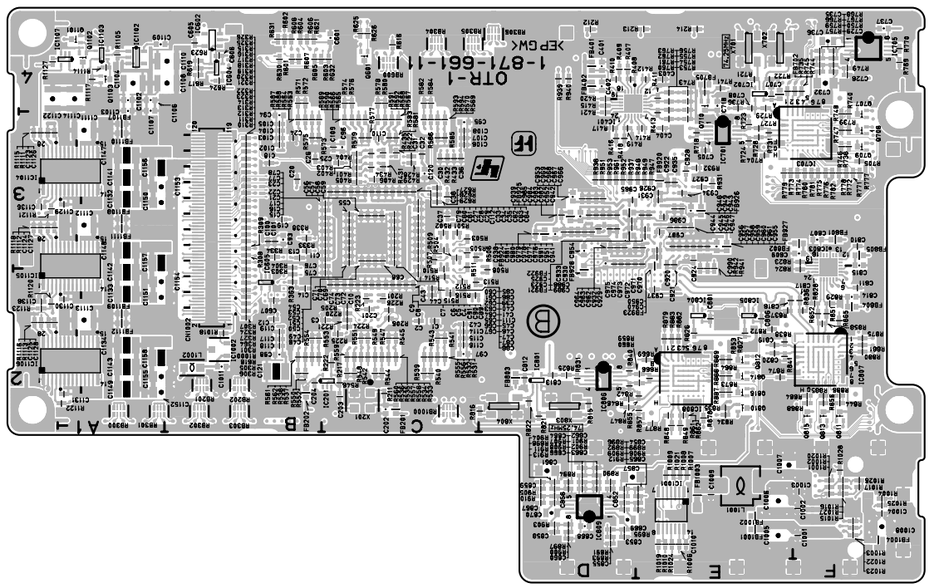


**OTR-1** -B SIDE-
SUFFIX: -11

---
OTR-1 (1-871-661-11)
---

*:B SIDE

| | | | | | |
|---|---|---|---|---|---|
| CN201 | D2 | FB558 | C4 | L701 | E4 |
| CN601 | B4 | FB559 | C4 | L801 | F3 |
| CN920 | E3 | FB560 | C4 | L802 | D2 |
| CN921 | E3 | FB561 | C4 | L1001 | *E1 |
| CN1001 | F1 | FB562 | C4 | L1002 | *B2 |
| CN1002 | *B3 | FB563 | C4 | L1101 | A4 |
| | | FB564 | C4 | L1102 | A3 |
| D201 | B2 | FB565 | C4 | L1103 | A2 |
| D202 | B2 | FB566 | C4 | L1104 | A2 |
| D203 | B2 | FB567 | B4 | | |
| D204 | B2 | FB568 | B4 | LP1 | A3 |
| D205 | B2 | FB569 | C4 | LP2 | D4 |
| D206 | B2 | FB570 | C4 | LP3 | F3 |
| D207 | B2 | FB601 | B3 | | |
| D208 | B2 | FB602 | B3 | Q201 | B2 |
| D301 | A2 | FB701 | E3 | Q202 | B2 |
| D302 | A2 | FB702 | *E4 | Q203 | B2 |
| D303 | A2 | FB703 | F3 | Q204 | B2 |
| D304 | A2 | FB704 | F4 | Q205 | B2 |
| D305 | A2 | FB705 | *E4 | Q206 | B2 |
| D306 | A2 | FB801 | *F3 | Q207 | B2 |
| D307 | A2 | FB802 | *F3 | Q208 | B2 |
| D308 | B2 | FB803 | *D2 | Q301 | B3 |
| D309 | B2 | FB804 | *F2 | Q302 | B2 |
| D310 | B2 | FB805 | *F3 | Q303 | B2 |
| D311 | B2 | FB806 | D2 | Q304 | B2 |
| D312 | B2 | FB807 | F2 | Q305 | B2 |
| D313 | B2 | FB808 | F2 | Q306 | B2 |
| D314 | B2 | FB809 | E2 | Q307 | B3 |
| D315 | B2 | FB810 | E2 | Q308 | B2 |
| D316 | B2 | FB920 | *E3 | Q309 | B2 |
| D601 | C4 | FB921 | *D3 | Q310 | B2 |
| D701 | F4 | FB922 | *D3 | Q311 | B2 |
| D702 | F3 | FB923 | *E3 | Q312 | B2 |
| D703 | F3 | FB924 | *D3 | Q313 | B3 |
| D801 | E2 | FB925 | *D3 | Q314 | B2 |
| D802 | E2 | FB926 | *E3 | Q315 | B2 |
| D803 | E2 | FB927 | *E3 | Q316 | B3 |
| D804 | F2 | FB928 | *D2 | Q601 | *C4 |
| D805 | F2 | FB1001 | *E1 | Q701 | E4 |
| D806 | F2 | FB1002 | *E1 | Q702 | E4 |
| D920 | D2 | FB1003 | *E1 | Q703 | E4 |
| D921 | D2 | FB1004 | *F1 | Q704 | F4 |
| D922 | D4 | FB1101 | A3 | Q705 | E3 |
| D923 | D4 | FB1102 | A3 | Q706 | F3 |
| D1001 | C2 | FB1103 | A2 | Q707 | *F3 |
| D1002 | C2 | FB1104 | A3 | Q708 | *F3 |
| D1003 | C2 | FB1105 | A3 | Q709 | *F3 |
| D1004 | C2 | FB1106 | A2 | Q710 | *E4 |
| D1101 | A4 | FB1107 | *A3 | Q801 | F3 |
| | | FB1108 | *A3 | Q802 | F3 |
| E1 | A2 | FB1109 | *A2 | Q803 | E3 |
| E2 | D4 | FB1110 | *A3 | Q804 | D2 |
| E3 | F4 | FB1111 | *A3 | Q805 | F3 |
| | | FB1112 | *A2 | Q806 | D2 |
| FB201 | *C2 | | | Q807 | D2 |
| FB202 | *B2 | IC1 | C3 | Q808 | D2 |
| FB401 | *D4 | IC201 | *C2 | Q809 | D2 |
| FB402 | *D4 | IC401 | *D4 | Q810 | *E2 |
| FB403 | D4 | IC601 | B4 | Q811 | *F2 |
| FB404 | E4 | IC602 | *B4 | Q812 | *E2 |
| FB531 | C2 | IC603 | B3 | Q813 | *F2 |
| FB532 | C2 | IC604 | *B4 | Q814 | *E2 |
| FB533 | C2 | IC605 | *B2 | Q815 | *F2 |
| FB534 | C2 | IC701 | *E3 | Q816 | *E2 |
| FB535 | C2 | IC702 | *E4 | Q1101 | *A4 |
| FB536 | C2 | IC703 | *F3 | Q1102 | *A4 |
| FB537 | C2 | IC704 | E3 | Q1103 | *A4 |
| FB538 | C2 | IC705 | *F4 | | |
| FB539 | C2 | IC801 | *D2 | S201 | D4 |
| FB540 | C2 | IC803 | *F3 | S202 | E4 |
| FB541 | C2 | IC804 | *E2 | S203 | E4 |
| FB542 | C2 | IC805 | *E2 | S301 | C4 |
| FB543 | B2 | IC806 | *D2 | S302 | D4 |
| FB544 | C2 | IC807 | *F2 | S303 | D4 |
| FB545 | B2 | IC808 | *E2 | S601 | C4 |
| FB546 | B2 | IC809 | *D1 | | |
| FB547 | C2 | IC920 | E3 | X201 | *C2 |
| FB548 | C2 | IC1001 | *E1 | X701 | *E4 |
| FB549 | B2 | IC1002 | *B2 | X702 | *E4 |
| FB550 | B2 | IC1101 | B3 | X801 | F2 |
| FB551 | B4 | IC1102 | *A4 | X802 | F3 |
| FB552 | C4 | IC1103 | *A4 | X803 | *D2 |
| FB553 | B4 | IC1104 | *A3 | X804 | *D2 |
| FB554 | B4 | IC1105 | *A3 | | |
| FB555 | C4 | IC1106 | *A2 | | |
| FB556 | C4 | IC1107 | *A4 | | |
| FB557 | C4 | | | | |

SDI-85, SDI-86

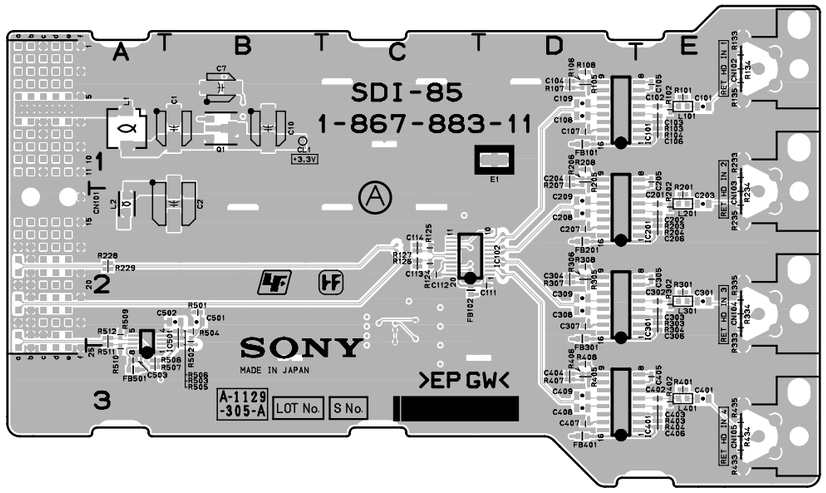


**SDI-85** -A SIDE-
SUFFIX: -11

SDI-85 (1-867-883-11)

*:B SIDE

| | |
|---|---|
| CL1 | B1 |
| CN101 | A2 |
| CN102 | E1 |
| CN103 | E2 |
| CN104 | E2 |
| CN105 | E3 |
| CN106 | *C2 |
| CN107 | *B2 |
| E1 | D1 |
| E2 | *D1 |
| FB101 | D1 |
| FB102 | C2 |
| FB201 | D2 |
| FB202 | *C2 |
| FB301 | D2 |
| FB401 | D3 |
| FB501 | A3 |
| IC1 | *B1 |
| IC2 | *B1 |
| IC101 | E1 |
| IC102 | D2 |
| IC103 | *C3 |
| IC201 | E2 |
| IC202 | *D2 |
| IC301 | E2 |
| IC401 | E3 |
| IC501 | A3 |
| L1 | A1 |
| L2 | A2 |
| L101 | E1 |
| L201 | E2 |
| L301 | E2 |
| L401 | E3 |
| Q1 | B1 |
| Q2 | *B1 |
| Q3 | *A3 |
| Q101 | *C3 |
| Q102 | *C2 |
| Q201 | *C2 |
| Q202 | *C2 |

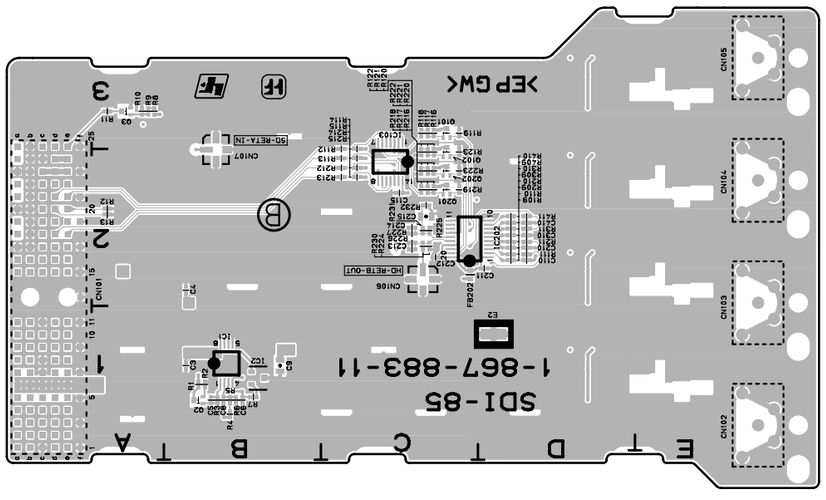


**SDI-85** -B SIDE-
SUFFIX: -11

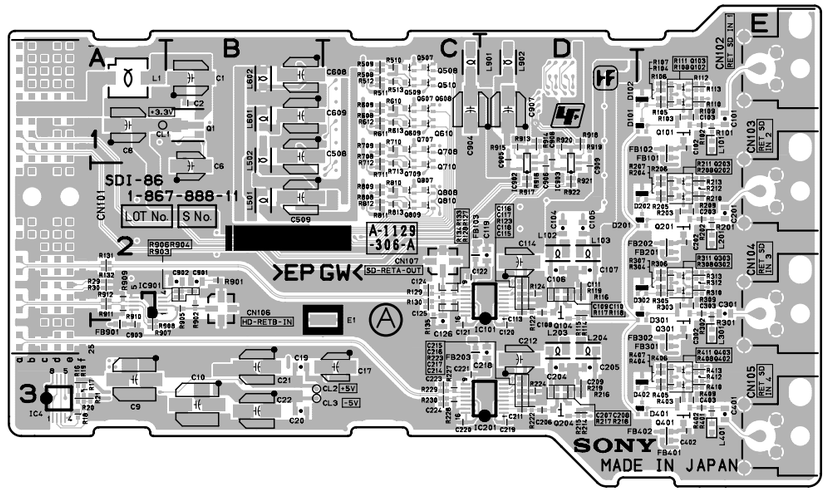


**SDI-86** -A SIDE-
SUFFIX: -11

SDI-86 (1-867-888-11)

*:B SIDE

| | | | |
|---|---|---|---|
| CL1 | A1 | Q1 | B1 |
| CL2 | B3 | Q2 | *B1 |
| CL3 | B3 | Q3 | *B3 |
| | | Q4 | *B3 |
| CN101 | A2 | Q5 | *A3 |
| CN102 | E1 | Q101 | E1 |
| CN103 | E2 | Q102 | E1 |
| CN104 | E2 | Q103 | E1 |
| CN105 | E3 | Q104 | D2 |
| CN106 | B2 | Q201 | E2 |
| CN107 | C2 | Q202 | E2 |
| CN108 | *D1 | Q203 | E2 |
| | | Q204 | D3 |
| D1 | *B3 | Q301 | E3 |
| D2 | *B3 | Q302 | E2 |
| D101 | E1 | Q303 | E2 |
| D102 | E1 | Q401 | E3 |
| D103 | *E1 | Q402 | E3 |
| D201 | E2 | Q403 | E3 |
| D202 | E2 | Q501 | *C1 |
| D203 | *E2 | Q502 | *C1 |
| D301 | E2 | Q503 | *C1 |
| D302 | E2 | Q504 | *C1 |
| D303 | *E2 | Q505 | *C1 |
| D401 | E3 | Q506 | *C1 |
| D402 | E3 | Q507 | C1 |
| D403 | *E3 | Q508 | C1 |
| | | Q509 | C1 |
| E1 | B3 | Q510 | C1 |
| E2 | *C2 | Q511 | *B1 |
| | | Q512 | *B2 |
| FB101 | E1 | Q513 | *B2 |
| FB102 | E1 | Q514 | *B2 |
| FB103 | C2 | Q601 | *C1 |
| FB201 | E2 | Q602 | *C1 |
| FB202 | E2 | Q603 | *C1 |
| FB203 | C3 | Q604 | *C1 |
| FB301 | E3 | Q605 | *C1 |
| FB302 | E3 | Q606 | *C1 |
| FB401 | E3 | Q607 | C1 |
| FB402 | E3 | Q608 | C1 |
| FB901 | A3 | Q609 | C1 |
| | | Q610 | C1 |
| IC1 | *B1 | Q611 | *B1 |
| IC2 | *B3 | Q612 | *B1 |
| IC3 | *C3 | Q613 | *B1 |
| IC4 | A3 | Q614 | *B1 |
| IC101 | D2 | Q701 | *C2 |
| IC102 | *D1 | Q702 | *C1 |
| IC201 | D3 | Q703 | *C1 |
| IC202 | *D1 | Q704 | *C2 |
| IC501 | *B2 | Q705 | *C1 |
| IC502 | *B2 | Q706 | *C2 |
| IC601 | *B1 | Q707 | C1 |
| IC602 | *B2 | Q708 | C1 |
| IC901 | A2 | Q709 | C2 |
| IC902 | D2 | Q710 | C2 |
| IC903 | D2 | Q801 | *C2 |
| | | Q802 | *C2 |
| L1 | A1 | Q803 | *C2 |
| L2 | *A3 | Q804 | *C2 |
| L3 | *A3 | Q805 | *C2 |
| L101 | E1 | Q806 | *C2 |
| L102 | D2 | Q807 | C2 |
| L103 | D2 | Q808 | C2 |
| L201 | E2 | Q809 | C2 |
| L203 | D3 | Q810 | C2 |
| L204 | D3 | | |
| L301 | E3 | | |
| L401 | E3 | | |
| L501 | B2 | | |
| L502 | B1 | | |
| L601 | B1 | | |
| L602 | B1 | | |
| L901 | C1 | | |
| L902 | D1 | | |

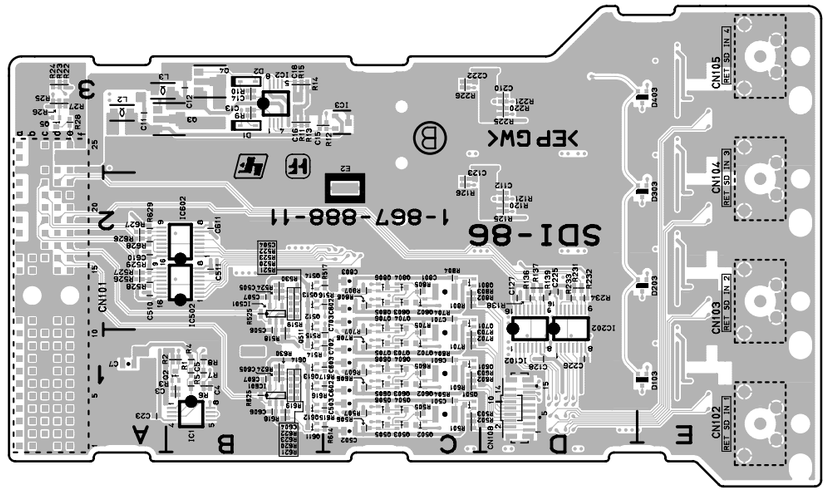


**SDI-86** -B SIDE-
SUFFIX: -11

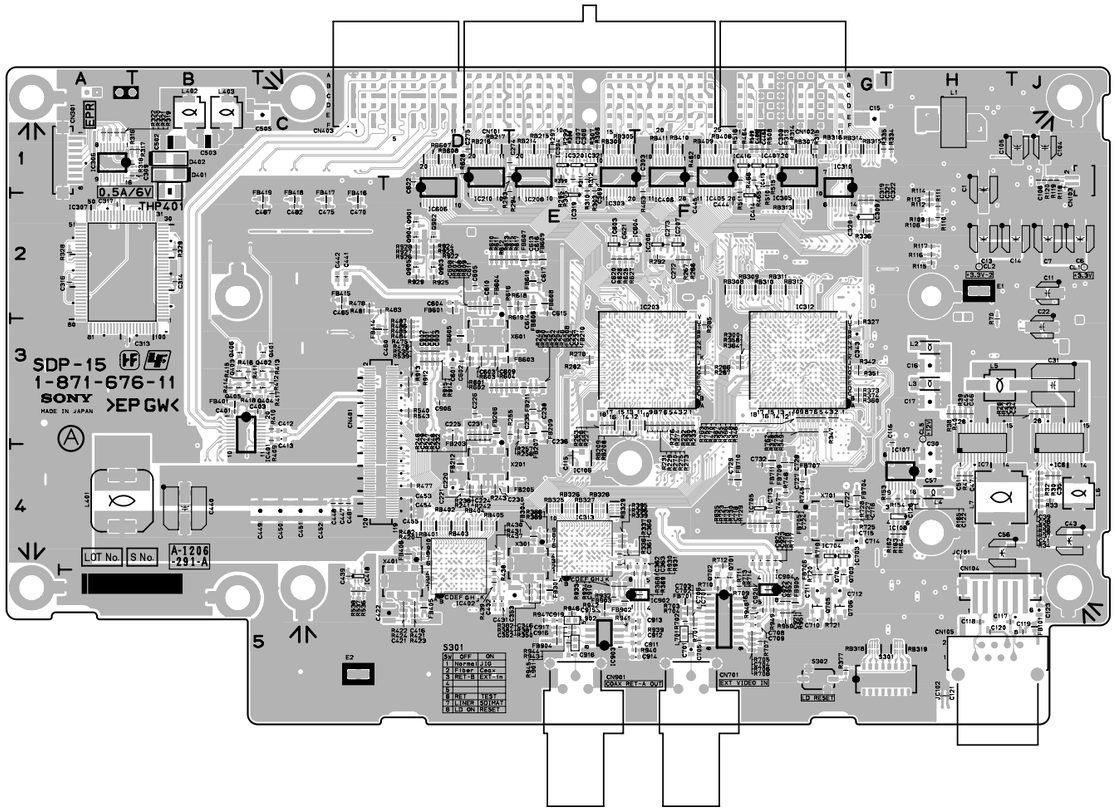


**SDP-15** -A SIDE-
SUFFIX: -11

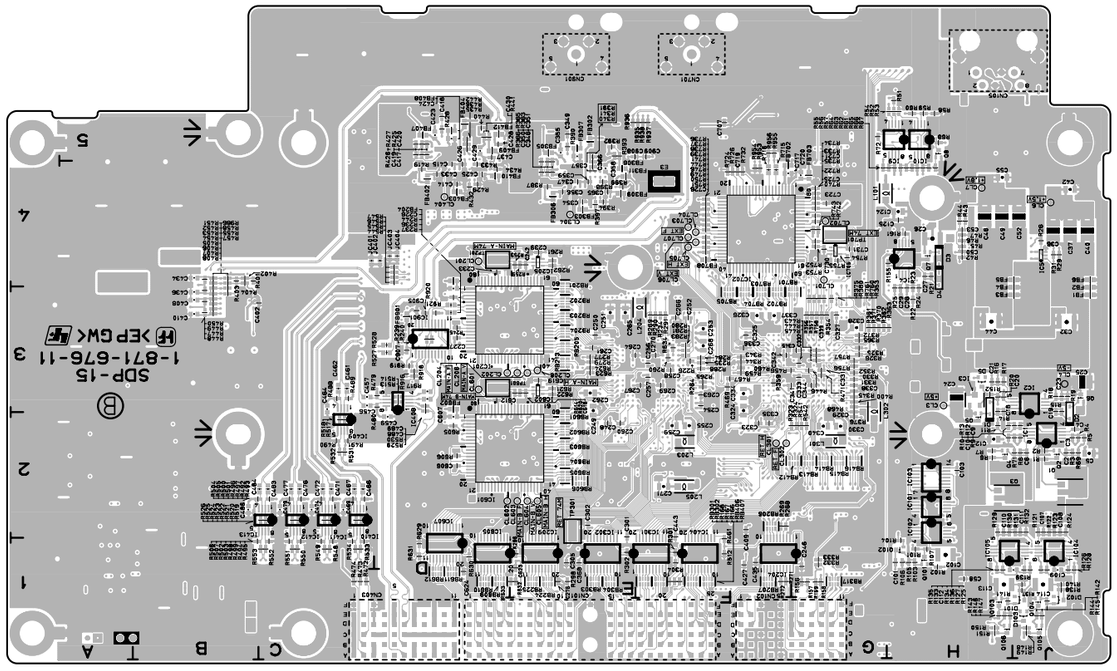


**SDP-15** -B SIDE-
SUFFIX: -11

---
SDP-15 (1-871-676-11)
---

*:B SIDE

| | | | | | |
|---|---|---|---|---|---|
| CL1 | J2 | FB409 | *D5 | IC416 | F1 |
| CL2 | H2 | FB410 | *D4 | IC418 | C5 |
| CL3 | *H3 | FB412 | *D5 | IC601 | *D2 |
| CL4 | *J3 | FB414 | C3 | IC602 | *E3 |
| CL5 | H3 | FB415 | C2 | IC603 | E2 |
| CL6 | *J4 | FB416 | C2 | IC604 | E2 |
| CL7 | *H4 | FB417 | C2 | IC605 | *D2 |
| CL201 | *D4 | FB418 | C2 | IC606 | D2 |
| CL202 | *D3 | FB419 | C2 | IC607 | *D2 |
| CL204 | *E3 | FB601 | D2 | IC701 | F5 |
| CL206 | *E3 | FB602 | *D3 | IC702 | *F4 |
| CL208 | *E3 | FB603 | D3 | IC703 | G4 |
| CL301 | *G2 | FB604 | D2 | IC704 | G4 |
| CL302 | *G2 | FB605 | D3 | IC705 | F4 |
| CL304 | *E4 | FB606 | E2 | IC706 | *G4 |
| CL404 | *D4 | FB607 | E2 | IC901 | *D3 |
| CL601 | *D3 | FB608 | E2 | IC902 | E5 |
| CL602 | *D2 | FB609 | E2 | IC903 | E5 |
| CL603 | *E2 | FB610 | E2 | IC904 | G5 |
| CL604 | *E2 | FB701 | F5 | | |
| CL605 | *E2 | FB702 | *G4 | L1 | H1 |
| CL701 | *G4 | FB703 | *G4 | L2 | H3 |
| CL702 | *G4 | FB704 | G4 | L3 | H3 |
| CL703 | *F4 | FB705 | G4 | L4 | H4 |
| CL704 | *F4 | FB706 | G4 | L5 | H3 |
| CL705 | *F4 | FB707 | G4 | L6 | J4 |
| CL706 | *F4 | FB708 | *F4 | L7 | H4 |
| CL707 | *F4 | FB709 | G4 | L101 | *G4 |
| | | FB710 | F4 | L203 | *F2 |
| CN101 | E1 | FB711 | G4 | L204 | *F3 |
| CN102 | G1 | FB901 | *D3 | L205 | *F2 |
| CN103 | J1 | FB902 | E5 | L301 | *G2 |
| CN104 | H5 | FB903 | E5 | L302 | *G3 |
| CN105 | H5 | FB904 | E5 | L401 | A4 |
| CN301 | A1 | FB905 | G5 | L402 | B1 |
| CN401 | C3 | | | L403 | B1 |
| CN403 | D1 | IC1 | *J2 | L701 | F5 |
| CN701 | F5 | IC2 | *J3 | L901 | E5 |
| CN901 | E5 | IC3 | *H3 | L902 | E5 |
| | | IC4 | *H4 | | |
| D1 | *H3 | IC5 | *J4 | Q1 | *J2 |
| D2 | *J2 | IC6 | J3 | Q2 | *J2 |
| D3 | *H4 | IC7 | H3 | Q3 | *H2 |
| D4 | *H4 | IC9 | *H5 | Q4 | *H2 |
| D5 | *H3 | IC10 | *H5 | Q5 | *H2 |
| D101 | *J1 | IC101 | *H2 | Q6 | *J3 |
| D102 | *J1 | IC102 | *H2 | Q7 | *H4 |
| D103 | *J1 | IC103 | *H2 | Q8 | *H5 |
| D401 | B1 | IC104 | *J1 | Q101 | *H1 |
| D402 | B1 | IC105 | *J1 | Q102 | *H1 |
| | | IC106 | E4 | Q103 | *H1 |
| E1 | H2 | IC107 | H4 | Q104 | *J1 |
| E2 | C5 | IC108 | H4 | Q105 | *J1 |
| E3 | *F4 | IC201 | *D3 | Q106 | *H1 |
| | | IC203 | F3 | Q401 | C3 |
| FB1 | *J3 | IC204 | *G1 | Q402 | C3 |
| FB2 | *J3 | IC205 | *E4 | Q403 | B3 |
| FB3 | *J3 | IC206 | F2 | Q404 | C3 |
| FB4 | *J3 | IC207 | F2 | Q405 | B3 |
| FB5 | *J4 | IC208 | E2 | Q406 | B3 |
| FB6 | *J4 | IC209 | *E2 | Q701 | F5 |
| FB101 | J5 | IC210 | D2 | Q702 | F5 |
| FB203 | D3 | IC301 | *F1 | Q703 | G5 |
| FB204 | *D4 | IC302 | *E1 | Q704 | G5 |
| FB205 | D4 | IC303 | E1 | Q705 | G5 |
| FB206 | D3 | IC304 | E1 | Q706 | G5 |
| FB207 | E3 | IC305 | G1 | Q901 | D2 |
| FB208 | E3 | IC306 | A1 | Q902 | D2 |
| FB209 | E3 | IC307 | A2 | Q903 | D2 |
| FB210 | E3 | IC309 | G2 | Q904 | D2 |
| FB211 | E3 | IC310 | G1 | Q905 | D2 |
| FB212 | D4 | IC312 | G3 | | |
| FB301 | E5 | IC313 | E4 | S301 | G5 |
| FB302 | *E5 | IC319 | E2 | S302 | G5 |
| FB303 | *E4 | IC320 | E1 | | |
| FB304 | E4 | IC321 | E1 | THP401 | B1 |
| FB305 | *E5 | IC401 | B3 | | |
| FB306 | *E4 | IC402 | D4 | TP201 | *D4 |
| FB307 | *E5 | IC404 | *F1 | TP301 | *E2 |
| FB308 | *E4 | IC405 | F1 | TP601 | *D3 |
| FB309 | *E4 | IC406 | F1 | TP701 | *G4 |
| FB311 | *E4 | IC407 | G1 | | |
| FB401 | B3 | IC408 | *D3 | X201 | D4 |
| FB402 | *D4 | IC409 | *C3 | X301 | E4 |
| FB403 | *D4 | IC410 | *C2 | X401 | D5 |
| FB404 | *D5 | IC411 | *C2 | X601 | D3 |
| FB405 | D5 | IC412 | *C2 | X701 | G4 |
| FB406 | D4 | IC413 | *C2 | | |
| FB407 | *D5 | IC414 | F2 | | |
| FB408 | *D5 | IC415 | F1 | | |

VDA-64, VIF-34

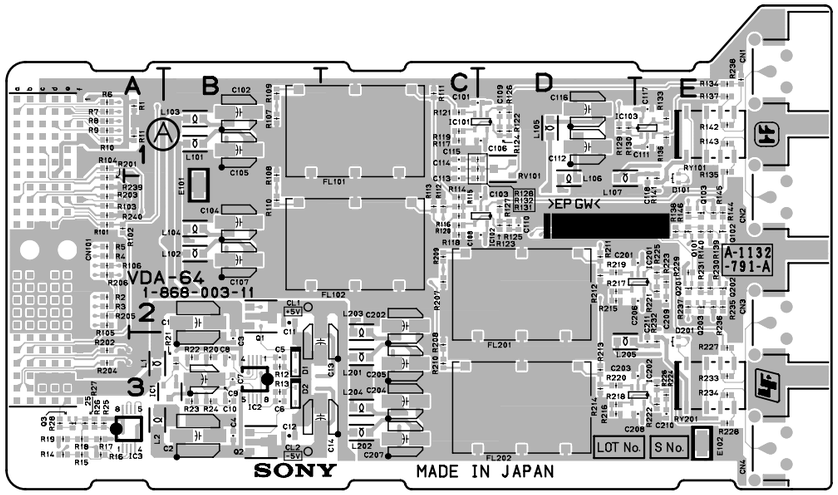


**VDA-64** -A SIDE-
SUFFIX: -12

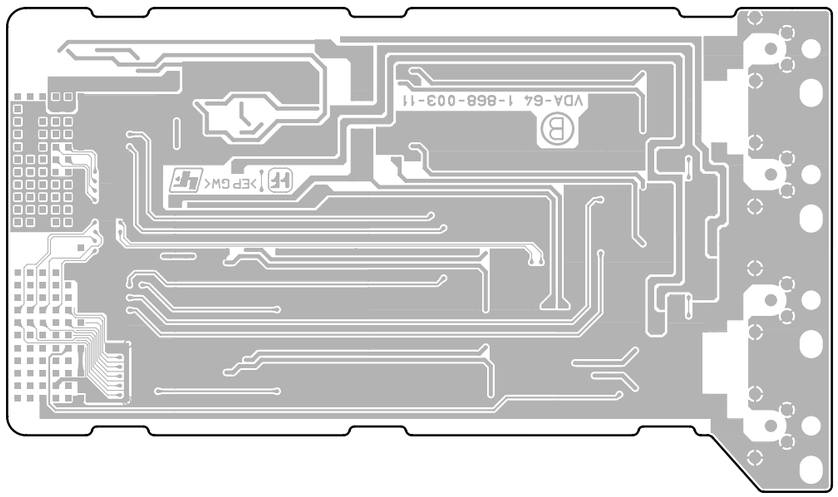


**VDA-64** -B SIDE-
SUFFIX: -12

VDA-64 (1-868-003-12)

*:B SIDE

| | |
|---|---|
| CL1 | B2 |
| CL2 | B3 |
| CN1 | E1 |
| CN2 | E2 |
| CN3 | E2 |
| CN4 | E3 |
| CN101 | A2 |
| D1 | B3 |
| D2 | B3 |
| D101 | E2 |
| D201 | E3 |
| E101 | B2 |
| E102 | E3 |
| FL101 | C1 |
| FL102 | C2 |
| FL201 | D2 |
| FL202 | D3 |
| IC1 | B3 |
| IC2 | B3 |
| IC3 | A3 |
| IC101 | D1 |
| IC102 | D2 |
| IC103 | E1 |
| IC201 | E2 |
| IC202 | E3 |
| L1 | A3 |
| L2 | A3 |
| L101 | B1 |
| L102 | B2 |
| L103 | B1 |
| L104 | B2 |
| L105 | D1 |
| L106 | D2 |
| L107 | D2 |
| L201 | C3 |
| L202 | C3 |
| L203 | C3 |
| L204 | C3 |
| L205 | D3 |
| Q1 | B2 |
| Q2 | B3 |
| Q3 | A3 |
| Q101 | E2 |
| Q102 | E2 |
| Q103 | E2 |
| Q201 | E2 |
| Q202 | E2 |
| Q203 | E2 |
| RV101 | D1 |
| RY101 | E1 |
| RY201 | E3 |

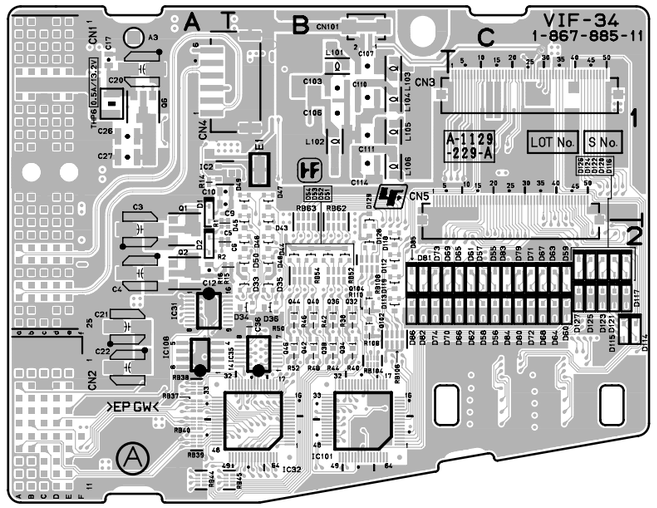


**VIF-34** -A SIDE-
SUFFIX: -11

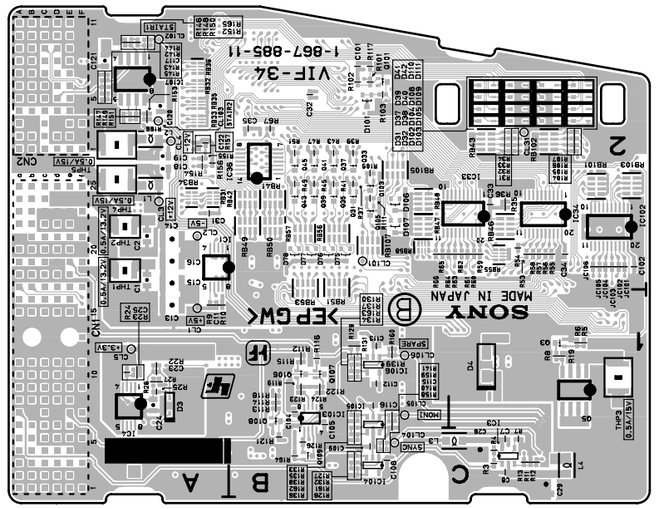


**VIF-34** -B SIDE-
SUFFIX: -11

VIF-34 (1-867-885-11)

*:B SIDE

| | | | | | |
|---|---|---|---|---|---|
| CL1 | *A1 | D104 | *C2 | Q104 | B2 |
| CL2 | *A2 | D105 | *C2 | Q105 | *B2 |
| CL3 | *A2 | D106 | *B2 | Q106 | *B1 |
| CL4 | *A2 | D107 | *B2 | Q107 | *B1 |
| CL5 | *A1 | D108 | *C2 | Q108 | *B1 |
| CL31 | *C2 | D109 | *C2 | Q109 | *B1 |
| CL101 | *B2 | D110 | *C2 | | |
| CL102 | *A2 | D111 | *C2 | THP1 | *A2 |
| CL103 | *A2 | D112 | B2 | THP2 | *A2 |
| CL104 | *B1 | D113 | B2 | THP3 | *C1 |
| CL105 | *B1 | D114 | C2 | THP4 | *A2 |
| CL106 | *B1 | D115 | C2 | THP5 | *A2 |
| | | D116 | C2 | THP6 | A1 |
| CN1 | A1 | D117 | C2 | | |
| CN2 | A2 | D118 | B2 | | |
| CN3 | C1 | D119 | B2 | | |
| CN4 | B1 | D120 | C2 | | |
| CN5 | C1 | D121 | C2 | | |
| CN101 | B1 | D122 | C2 | | |
| | | D123 | C2 | | |
| D1 | A1 | D124 | C2 | | |
| D2 | A2 | D125 | C2 | | |
| D3 | *A1 | D126 | C2 | | |
| D4 | *C1 | D127 | C2 | | |
| D31 | *C2 | D128 | B2 | | |
| D32 | *C2 | D129 | B2 | | |
| D33 | B2 | | | | |
| D34 | B2 | E1 | B1 | | |
| D35 | B2 | | | | |
| D36 | B2 | IC1 | *A2 | | |
| D37 | *C2 | IC2 | A1 | | |
| D38 | *C2 | IC3 | *C1 | | |
| D39 | *C2 | IC4 | *A1 | | |
| D40 | *C2 | IC31 | A2 | | |
| D41 | *C2 | IC32 | B2 | | |
| D42 | *C2 | IC33 | *C2 | | |
| D43 | B2 | IC34 | *C2 | | |
| D44 | B2 | IC35 | B2 | | |
| D45 | B2 | IC36 | *B2 | | |
| D46 | B2 | IC101 | B2 | | |
| D47 | B1 | IC102 | *C2 | | |
| D48 | B2 | IC103 | *B1 | | |
| D49 | B1 | IC104 | *B1 | | |
| D50 | B2 | IC105 | *B1 | | |
| D51 | B2 | IC106 | *B1 | | |
| D52 | B2 | IC107 | *A2 | | |
| D53 | B2 | IC108 | A2 | | |
| D54 | B2 | | | | |
| D55 | C2 | L1 | *A2 | | |
| D56 | C2 | L2 | *A2 | | |
| D57 | C2 | L3 | *C1 | | |
| D58 | C2 | L4 | *C1 | | |
| D59 | C2 | L101 | B1 | | |
| D60 | C2 | L102 | B1 | | |
| D61 | C2 | L103 | B1 | | |
| D62 | C2 | L104 | B1 | | |
| D63 | C2 | L105 | B1 | | |
| D64 | C2 | L106 | B1 | | |
| D65 | C2 | | | | |
| D66 | C2 | Q1 | A2 | | |
| D67 | C2 | Q2 | A2 | | |
| D68 | C2 | Q3 | *C1 | | |
| D69 | B2 | Q5 | *C1 | | |
| D70 | B2 | Q6 | A1 | | |
| D71 | C2 | Q31 | *B2 | | |
| D72 | C2 | Q32 | B2 | | |
| D73 | B2 | Q33 | *B2 | | |
| D74 | B2 | Q34 | B2 | | |
| D75 | *B2 | Q35 | *B2 | | |
| D76 | *B2 | Q36 | B2 | | |
| D77 | *B2 | Q37 | *B2 | | |
| D78 | *B2 | Q38 | B2 | | |
| D79 | C2 | Q39 | *B2 | | |
| D80 | C2 | Q40 | B2 | | |
| D81 | B2 | Q41 | *B2 | | |
| D82 | B2 | Q42 | B2 | | |
| D83 | C2 | Q43 | *B2 | | |
| D84 | C2 | Q44 | B2 | | |
| D85 | B2 | Q45 | *B2 | | |
| D86 | B2 | Q46 | B2 | | |
| D101 | *B2 | Q101 | *B2 | | |
| D102 | *C2 | Q102 | B2 | | |
| D103 | *C2 | Q103 | *B2 | | |

## SAFETY CHECK-OUT

After correcting the original service problem, perform the following safety checks before releasing the set to the customer :

Check the metal trim, “metallized” knobs, screws, and all other exposed metal parts for AC leakage. Check leakage as described below.

### LEAKAGE TEST

The AC leakage from any exposed metal part to earth ground and from all exposed metal parts to any exposed metal part having a return to chassis, must not exceed 3.5 mA. Leakage current can be measured by any one of three methods.

1. A commercial leakage tester, such as the Simpson 229 or RCA WT-540A. Follow the manufacturers’ instructions to use these instruments.
2. A battery-operated AC milliammeter. The Data Precision 245 digital multimeter is suitable for this job.
3. Measuring the voltage drop across a resistor by means of a VOM or battery-operated AC voltmeter. The “limit” indication is 5.25 V, so analog meters must have an accurate low-voltage scale. The Simpson 250 and Sanwa SH-63Trd are examples of a passive VOM that is suitable. Nearly all battery operated digital multimeters that have a 20 V AC range are suitable. (See Fig. A)

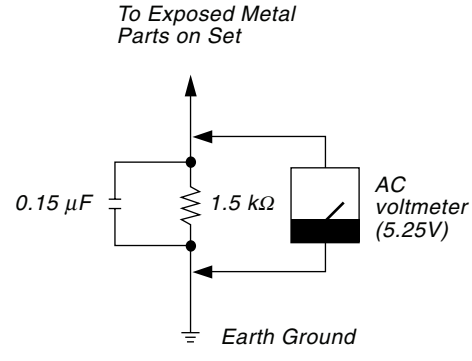


*Fig A. Using an AC voltmeter to check AC leakage.*

HDCU3300 (UC)
HDCU3300 (J)
HDCU3300 (CE)
HKCU1001 (SY)
HKCU1003 (SY)
HKCU1005 (SY) J, E
9-968-308-01

Sony Corporation

Printed in Japan
2006. 10 16
©2006