

## TABLE OF CONTENTS

<b>1. OVERVIEW.....</b>	<b>1</b>
<b>1.1. TYPICAL CONFIGURATION.....</b>	<b>3</b>
1.1.1. Uni-directional Bypass Switch .....	3
<b>2. INSTALLATION.....</b>	<b>4</b>
<b>2.1. GPIO .....</b>	<b>5</b>
<b>3. SPECIFICATIONS.....</b>	<b>6</b>
<b>3.1. RF INPUT/OUTPUT.....</b>	<b>6</b>
<b>3.2. GENERAL PURPOSE INPUTS .....</b>	<b>6</b>
<b>3.3. GENERAL PURPOSE OUTPUTS .....</b>	<b>6</b>
<b>3.4. ELECTRICAL .....</b>	<b>6</b>
<b>3.5. PHYSICAL .....</b>	<b>6</b>
<b>4. STATUS INDICATORS AND DISPLAYS .....</b>	<b>7</b>
<b>4.1. STATUS INDICATOR LEDS.....</b>	<b>7</b>
<b>4.2. DOT-MATRIX DISPLAY ( 7703BPX-IF ONLY ).....</b>	<b>7</b>
4.2.1. Displaying the RF Power of Input A and Input B .....	8
4.2.2. Displaying the GPI1 and GPI2 State .....	9
4.2.3. Displaying the Active Channel .....	9
4.2.4. Displaying the Operating Mode Status .....	9
4.2.5. Displaying the Firmware Version .....	9
4.2.6. Selecting the Switch Mode .....	10
4.2.7. Setting the RF Power Threshold for Auto Mode Switching.....	10
4.2.8. Changing the Orientation of the Text on the Display .....	11
4.2.9. Selecting High or Low as GPI Active State.....	11
4.2.10.Performing a Factory Reset .....	11
<b>5. DIP SWITCHES ( 7702BPX-IF ONLY ).....</b>	<b>12</b>
<b>5.1. CONTROLLING THE SWITCH OPERATING MODE .....</b>	<b>12</b>
<b>5.2. CONTROLLING THE SWITCH USING GPI INPUTS.....</b>	<b>13</b>
<b>6. JUMPERS.....</b>	<b>14</b>
<b>6.1. SELECTING WHETHER LOCAL FAULTS WILL BE MONITORED         BY THE GLOBAL FRAME STATUS .....</b>	<b>15</b>
<b>6.2. MONITORING AND CONTROL OF 7703BPX-IF CARDS THROUGH SNMP         OR CARD EDGE MENU SYSTEM.....</b>	<b>15</b>
<b>6.3. CONFIGURING THE MODULE FOR FIRMWARE UPGRADES (7703BPX-IF ONLY) .....</b>	<b>15</b>

6.4.	SELECTING THE GPI PULL-UP VOLTAGE .....	15
6.5.	USING THE GPO OUTPUTS .....	15
7.	VISTALINK <sup>®</sup> REMOTE MONITORING/CONTROL (7703BPX-IF ONLY).....	16
7.1.	WHAT IS VISTALINK <sup>®</sup> ? .....	16
7.2.	VISTALINK <sup>®</sup> MONITORED PARAMETERS .....	16
7.3.	VISTALINK <sup>®</sup> CONTROLLED PARAMETERS .....	17
7.4.	VISTALINK <sup>®</sup> TRAPS .....	17

## Figures

Figure 1-1:	7703BPX-IF Block Diagram.....	2
Figure 1-2:	7702BPX-IF Block Diagram.....	2
Figure 1-3:	Typical Application of Protection Switch in IF Uplink Transport System .....	3
Figure 2-1:	7702BPX-IF and 7703BPX-IF Rear Panels.....	4
Figure 2-2:	GPI Input Circuitry .....	5
Figure 2-3:	GPO Configuration .....	5
Figure 6-1:	Location of Jumpers – 7702BPX-IF.....	14
Figure 6-2:	Location of Jumpers – 7703BPX-IF.....	14

## Tables

Table 4-1:	Setting the Switch Mode via the SET/MODE menu.....	10
Table 4-2:	Controlling the Switch Using GPI Inputs – 7703BPX-IF .....	10
Table 5-1:	DIP Switch Functions.....	12
Table 5-2:	Operating Mode Switch Settings .....	12
Table 5-3:	GPI Active State Switch Settings .....	13
Table 5-4:	Controlling the switch Using GPI Inputs – 7702BPX-IF.....	13
Table 7-1:	VistaLINK <sup>®</sup> Monitored Parameters.....	16
Table 7-2:	VistaLINK <sup>®</sup> Controlled Parameters .....	17
Table 7-3:	VistaLINK <sup>®</sup> Traps .....	17

## REVISION HISTORY

<u>REVISION</u>	<u>DESCRIPTION</u>	<u>DATE</u>
1.0	First Version	Jan 05
1.1	Minor typographical errors fixed	Aug 05
1.2	Updated specs and menu formatting	Sept 09

Information contained in this manual is believed to be accurate and reliable. However, Evertz assumes no responsibility for the use thereof nor for the rights of third parties, which may be effected in any way by the use thereof. Any representations in this document concerning performance of Evertz products are for informational use only and are not warranties of future performance, either express or implied. The only warranty offered by Evertz in relation to this product is the Evertz standard limited warranty, stated in the sales contract or order confirmation form.

Although every attempt has been made to accurately describe the features, installation and operation of this product in this manual, no warranty is granted nor liability assumed in relation to any errors or omissions unless specifically undertaken in the Evertz sales contract or order confirmation. Information contained in this manual is periodically updated and changes will be incorporated into subsequent editions. If you encounter an error, please notify Evertz Customer Service department. Evertz reserves the right, without notice or liability, to make changes in equipment design or specifications.

*This page left intentionally blank*

## 1. OVERVIEW

The 7702BPX-IF and 7703BPX-IF modules are wide band 2 x 1 RF protection switches that provide auto-changeover capability by detecting a change in the input power level. Manual control or automation control via the GPI port is also provided. This is a latching switch which maintains switch state on loss of power. It is designed for intermediate frequency satellite earth station links or CATV signals and operates over a wide frequency range of 10MHz to 850MHz.

The 7703BPX-IF model has integrated *VistaLINK*<sup>®</sup> technology for remote control and monitoring capability via SNMP. This provides the user with the ability to locally or remotely configure and monitor parameters such as module status, selected input, power level and switching threshold.

In the auto-changeover application, both products can be configured to have a *Main* input and a *Standby* input. In this configuration, it will automatically switch to the *Standby* input when the *Main* input power is weak or lost. Switch-back to the Main input when the signal is re-established may be configured to occur automatically or manually. The 7702/7702BPX-IF may also be configured to operate manually as a 2:1 switch, which may be controlled locally or remotely via GPI or SNMP (7703 model only).

The 7702BPX-IF and 7703BPX-IF occupy one card slot and can be housed in a 1RU frame that will hold up to 3 modules, a 3RU frame that will hold up to 15 modules, a 350FR portable frame that will hold up to 7 modules or a standalone enclosure which holds 1 module.

### Features:

- Wide operating frequency range, 10MHz to 850MHz
- Intelligent auto switching with input power detection
- User-definable threshold levels on 7703BPX-IF version
- Maintains switch state and RF channel on loss of power to card or frame
- Supports automatic or manual control via GPI or SNMP on 7703BPX-IF
- Switch state indication via GPO
- Card edge LEDs indicate active input channels, output channel and power levels below threshold
- Fully hot-swappable from front of frame
- Comprehensive signal and card status monitoring via four digit card edge display or remotely through SNMP and *VistaLINK*<sup>®</sup> on 7703 version
- *VistaLINK*<sup>®</sup> capability is available when 7703BPX-IF modules are used with the 3RU 7800FR or 350FR portable frame and a 7700FC *VistaLINK*<sup>®</sup> Frame Controller module in slot 1 of the frame

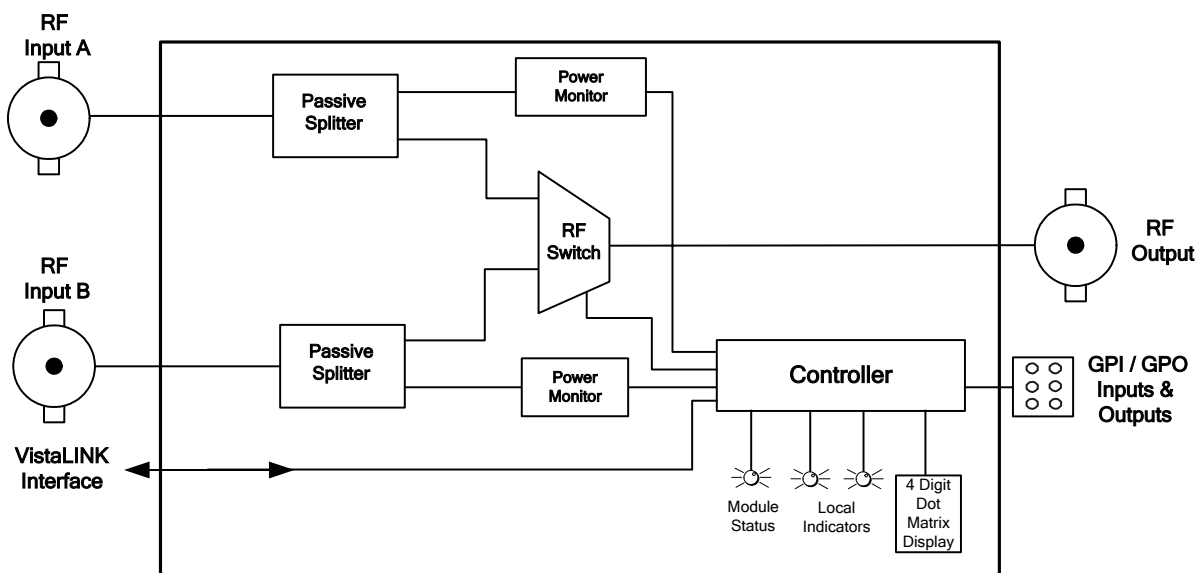


Figure 1-1: 7703BPX-IF Block Diagram


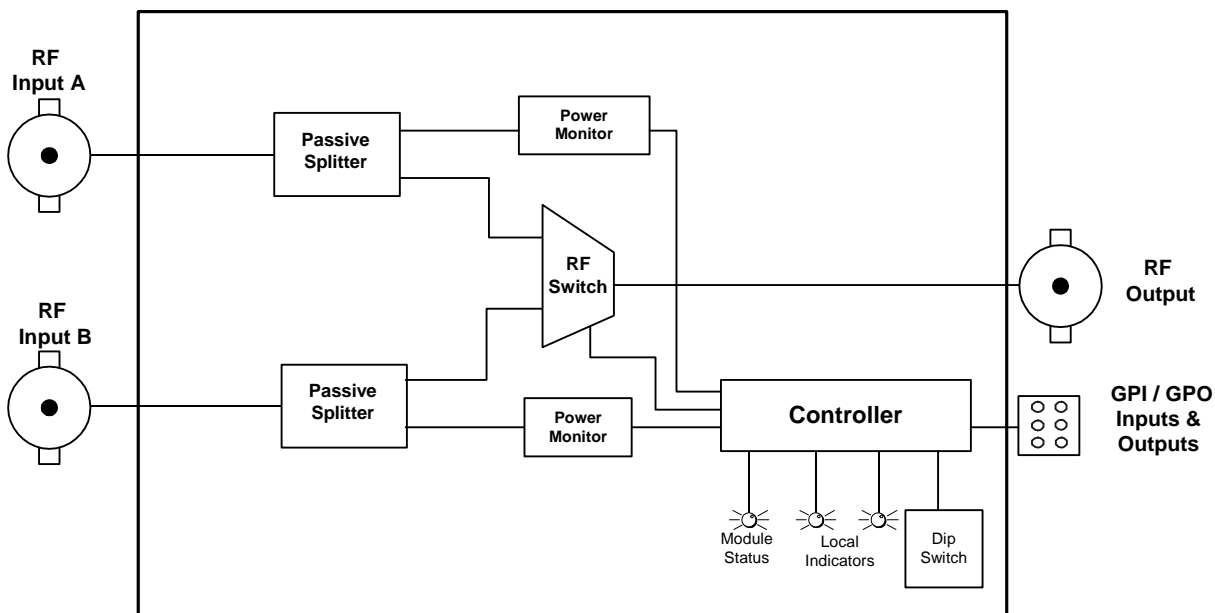


Figure 1-2: 7702BPX-IF Block Diagram

## 1.1. TYPICAL CONFIGURATION

### 1.1.1. Uni-directional Bypass Switch

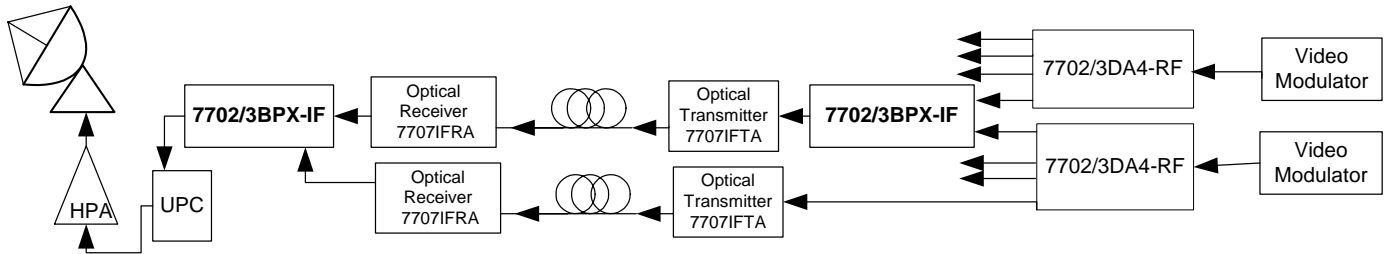

**Figure 1-3: Typical Application of Protection Switch in IF Uplink Transport System**

Figure 1-3 illustrates the use of the BPX-IF as a protection switch in an earth station IF satellite uplink transport system. The modulated video signal at 70 / 140MHz intermediate frequency is fed into the Evertz Microsystems 7702/3DA4-RF 1x4 active splitter for distribution to multiple transmit paths. Two signals from different sources are directed to the 7702/3BPX-IF, one acting as a primary source and the other as a backup signal if the primary fails. The IF signal is then transported over optical fiber up to 60km using the optical transmitter / receiver pair, 7707IFTA and 7707IFRA from Evertz Microsystems from the NOC ( Network Operations Centre ) to the dish. The protection switch can also be used to provide redundancy to the fiber optic link as shown in the above diagram. This protects against a fiber break or optical transmitter / receiver failure. The switch is a latching switch, maintaining the switch state on loss of power.

## 2. INSTALLATION

The 7702BPX-IF and 7703BPX-IF both come with a companion rear plate that has three BNC (F type optional) connectors and a six pin terminal strip. For information on mounting the rear plate and inserting the module into the frame see section 3 of the 7700FR chapter.

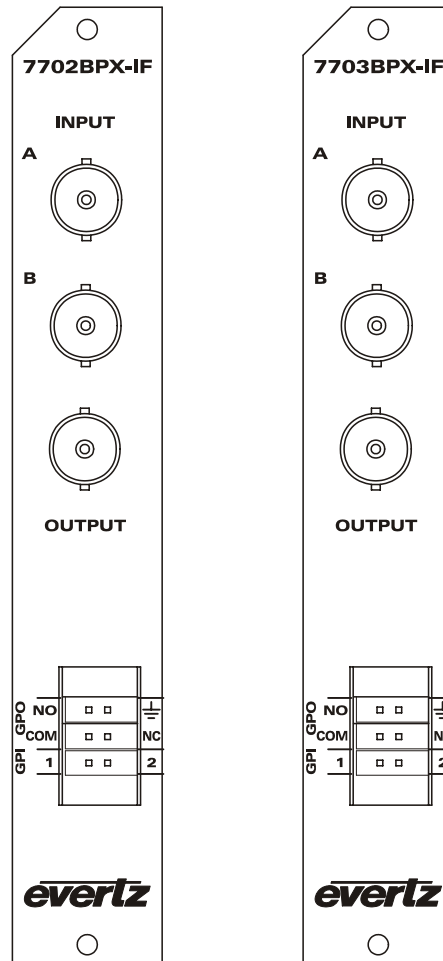


Figure 2-1: 7702BPX-IF and 7703BPX-IF Rear Panels

**INPUT A, B:** The two BNC ( F type optional ) connectors are RF inputs that accept frequencies over the range of 10MHz to 850MHz. The A connector is for the *Main* input and the B connector is for the *Standby* input.


**OUTPUT:** This BNC ( F type optional ) connector is the output from the switch.



## 2.1. GPIO


A 6-pin removable terminal block labeled **GPIO** contains 2 GPI inputs and 2 GPI outputs

**GPI:** The two top pins on the 6 pin terminal strip are used for two General Purpose inputs (GPI). The GPIs can be configured as active high or low by setting DIP switch 3. GPIs are active low when Dip switch 3 is Off and GPIs are active high when Dip switch 3 is in On (positioned closest to the PCB). The GPI inputs are opto isolated with an internal pullup resistor to +5V or +12V as shown in Figure 2-2. See section 6.4 for information on selecting the pull-up voltage.

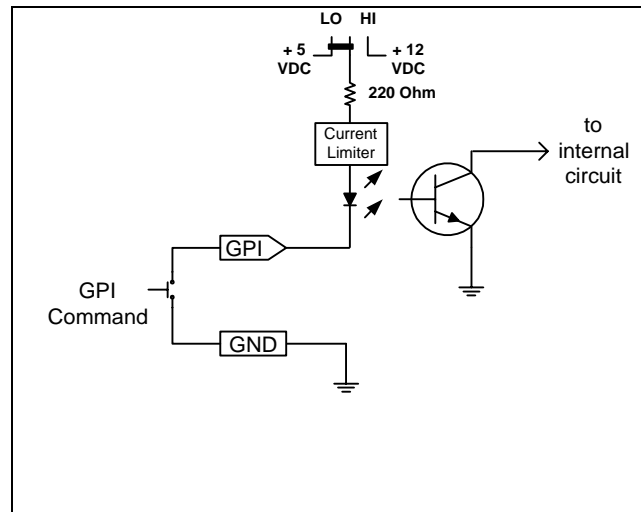

**Figure 2-2: GPI Input Circuitry**

**GPO:** The **NC**, **NO** and **COM** pins on the 6 pin terminal strip are used for the General Purpose Output (GPO). The GPO output is a set of normally open and normally closed relay contacts as shown in Figure 2-3.

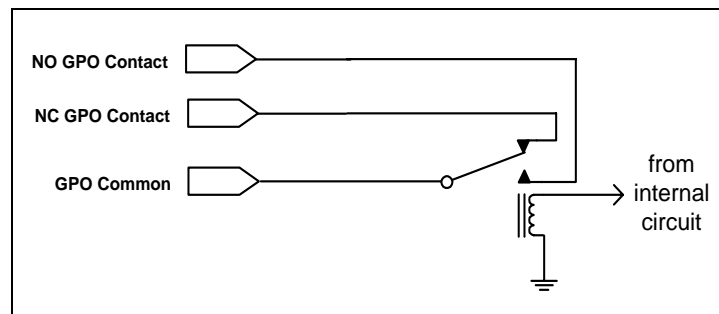

**Figure 2-3: GPO Configuration**

### 3. SPECIFICATIONS

#### 3.1. RF INPUT/OUTPUT

Inputs:	2
Outputs:	1
Connectors:	BNC per IEC 60169-8 Annex A ( F type optional )
I/O Impedance:	75Ω , 50Ω optional
Frequency Response:	
10-200MHz:	< ±0.25dB
10-850MHz:	< ±0.5dB
Insertion Loss:	< 4dB
Return Loss:	
10-200MHz:	< 15dB
10-850MHz:	< 17dB
Isolation:	> 50dB (10-850MHz)
Input Power Range:	0dBm to -50dBm

#### 3.2. GENERAL PURPOSE INPUTS

Number of Inputs:	2
Type:	Opto-isolated, active low with internal pull-ups to +5V
Connector:	2 pins plus ground on 6 pin terminal strip
Signal Level:	
+5V Pullup:	Low: -5 to +2.5 VDC, High: 3.5 to 10 VDC
+12V Pullup:	Low: -5 to +9.5 VDC, High: 10.5 to 15 VDC
Max Sink Current:	(input shorted to ground) 15 mA
Max Leakage Current for Input High:	200 μA

#### 3.3. GENERAL PURPOSE OUTPUTS

Number of Outputs:	1
Type:	“Dry Contact” relay contacts - normally open and normally closed contact provided
Connector:	3 pins on 6 pin terminal strip

#### 3.4. ELECTRICAL

Voltage:	+12VDC
Power:	3 Watts
EMI/RFI:	Complies with FCC regulations for class A devices Complies with EU EMC directive

#### 3.5. PHYSICAL

7700 or 7701 frame mounting:	
Number of slots:	1

## **4. STATUS INDICATORS AND DISPLAYS**

The 7702BPX-IF and 7703BPX-IF have 9 LED Status indicators on the front card edge to show operational status of the card at a glance. The 7703BPX-IF also has an alphanumeric dot matrix display, toggle switch and push button. The card edge pushbutton and toggle switch is for user input. Figure 6-1 shows the location of the LEDs and card edge controls.

### **4.1. STATUS INDICATOR LEDS**

Two large LEDs on the front of the board indicate the general health of the module

**LOCAL FAULT:** This Red LED indicates poor module health and will be On during the absence of a valid IF input signal or if a board power fault exists (i.e.: a blown fuse). The LOCAL FAULT indication can also be reported to the frame through the FRAME STATUS jumper.

**MODULE OK:** This Green LED indicates good module health. It will be On when a valid IF input signal is present, and the board power is good.

There are four small LEDs beside the LED display that indicate the status of the module.

**CH A ACTIVE:** This Green LED indicates that Channel A has power above threshold.

**CH A PWR LOW:** This Red LED indicates when the received power on Channel A is below the switching threshold set for Channel A. (See section 4.2.7)

**CH B ACTIVE:** This Green LED indicates that Channel B has power above threshold.

**CH B PWR LOW:** This Red LED indicates when the received power on Channel B is below the switching threshold set for Channel B. (See section 4.2.7)

**OUTPUT INDICATOR:** This Green LED is ON when Channel A is connected to the output and OFF when Channel B is connected to the output.

**AUTO MODE:** This Yellow LED is ON when Auto Mode is selected and OFF when Auto mode is not selected.

**SWITCH BACK:** This Yellow LED is OFF when Switch Back Mode is selected (For auto mode only).

### **4.2. DOT-MATRIX DISPLAY ( 7703BPX-IF ONLY )**

Additional signal and status monitoring and control over the card's parameters are provided via the 4-digit alphanumeric display located on the card edge. To select one of two menu display modes, press the toggle switch. To go to the sub-menu press the pushbutton once to select the sub-menu display, and then press the toggle switch. When in a particular display mode, press the pushbutton to display the value and use the toggle switch to change values (if applicable) and to see what status is being displayed for the particular menu item. The following display messages indicate what is being displayed. The details of each of the displays are described in the sections 4.2.1 to 4.2.6.

OK

MON

- PWRA Display the input power of channel A
- PWRB Display the input power of channel B
- GPI1 GPI1 state
- GPI2 GPI2 state
- CHAN Indicates whether input A or input B is the active channel
- MODE Indicates operational mode status
  - AUTO Indicates Auto – No switch back
  - ASB Indicates Auto - Switch Back
  - EXT Indicates external (GPI ) mode status
  - CHAN A Indicates external mode status
  - CHAN B Indicates external mode status
- VER Display firmware version

SET

- MODE Sets operating mode
  - AUTO Auto – No switch back
  - ASB Auto - Switch Back
  - EXT External ( GPI ) mode
  - CHAN A Switch to channel A
  - CHAN B Switch to channel B
- MINA Set Channel A's minimum power threshold
- MINB Set Channel B's minimum power threshold
- DISP Set Display Orientation ( HORZ / VERT )
- ACTV Sets High or Low as GPI Active State
- FRST Factory Reset

4.2.1. Displaying the RF Power of Input A and Input B

The 7703BPX-IF detects the input RF power of both inputs and displays this on the four-digit card edge display. Enter the *MON* menu, then toggle to *PWRA* or *PWRB*, and press the pushbutton. This displays the corresponding input power. The following list describes possible displays and their meaning.

MON
PWRA
PWRB
OVR
-10 to -50
LOW

The video standard will be displayed from the list below:

- OVR Indicates RF input power is above threshold
- 10 to -50 Numerical value of RF input power in dBm
- LOW Indicates RF input power is below threshold



The power reading is reliable to –45dBm.  
Do not set the threshold for switching below –45dBm.

#### 4.2.2. Displaying the GPI1 and GPI2 State

The 7703BPX-IF detects the status of the GPI inputs and displays this on the four-digit card edge display. Enter the *MON* menu item, then use the toggle switch to select *GPI1* or *GPI2*, then press the pushbutton.

<i>MON</i>	The following list describes the possible menu display options:	
<i>GPI1</i>		
<i>GPI2</i>		
<i>High</i> <i>Low</i>		
	<b>HIGH</b>	Indicates that the selected GPI input is high
	<b>LOW</b>	Indicates that the selected GPI input is low

#### 4.2.3. Displaying the Active Channel

The 7703BPX-IF detects the active channel and displays this on the four-digit card edge display. Enter the *MON* menu item, then use the toggle switch to select *CHAN*, and press the pushbutton.

<i>MON</i>	The following list describes the possible menu display options:	
<i>CHAN</i>		
<i>CH A</i>		
<i>CH B</i>		
	<b>CH A</b>	Indicates that A is active channel
	<b>CH B</b>	Indicates that B is active channel

#### 4.2.4. Displaying the Operating Mode Status

The 7703BPX-LB detects the operating mode status and displays this on the four-digit card edge display. Enter the *MON* menu item, then use the toggle switch to select *GPI1* or *GPI2*, and press the pushbutton.

<i>MON</i>	The following list describes the possible menu display options:	
<i>MODE</i>		
<i>AUTO</i>		
<i>ASB</i>		
<i>EXT</i>		
<i>CH A</i>		
<i>CH B</i>		
	<b>AUTO</b>	Indicates Auto – No switch back
	<b>ASB</b>	Indicates that A is active channel
	<b>EXT</b>	Indicates external (GPI) mode status
	<b>CHAN A</b>	Indicates external mode status
	<b>CHAN B</b>	Indicates external mode status

#### 4.2.5. Displaying the Firmware Version

To view the current firmware version enter the *MON* menu, then toggle to the *VER* menu option.

<i>MON</i>	Displays the current firmware version on the card
<i>VER</i>	

#### 4.2.6. Selecting the Switch Mode

To select the desired operating mode, navigate to the SET menu and toggle to the MODE menu item. The following list of modes will be displayed (AUTO, ASB, CH A (Manual), CH B (Manual) or EXT (External Mode)). Table 4-1 shows the operating modes for each selection.

SETTING	MODE	DESCRIPTION
<b>AUTO</b>	<b>Auto</b>	If channel A is active, it will switch to channel B if A falls below threshold (and if B is above threshold). If A rises above threshold, channel B will remain active channel, unless channel B falls below threshold, then the module will switch back to A (if A is above threshold)
<b>ASB</b>	<b>Auto Switch Back</b>	Channel A is the main input and Channel B is standby. If A falls below threshold, it will switch to B (if B is above threshold). When A returns to a level above threshold, it will switch back to A.
<b>CH A or CH B</b>	<b>Manual</b>	The active channel is selected as either Channel A or Channel B
<b>EXT</b>	<b>External (GPI)</b>	Operating mode is selectable via the GPIs

**Table 4-1: Setting the Switch Mode via the SET/MODE menu**

To operate in external (GPI) mode, set the EXT item to ON. The Switch mode is now selectable based on the GPI1 and GPI2 settings. Table 4-2 shows the settings to achieve the desired switch state. The *Auto Switch Back* and *No Auto Switch Back* Modes operate as described in Table 4-1. The *SET / ACTV* menu item controls whether the active GPI state is high or low.

Operating Mode	Manual		Auto	
	CH A	CH B	Switch Back	No Switch Back
<b>GPI1</b>	Active	Inactive	Inactive	Active
<b>GPI2</b>	Inactive	Active	Inactive	Active

**Table 4-2: Controlling the Switch Using GPI Inputs – 7703BPX-IF**

#### 4.2.7. Setting the RF Power Threshold for Auto Mode Switching

The *MINA* and *MINB* display in the *SET* menu allows the user to set the minimum input RF power threshold for each channel before the auto switch function will occur. To increase the RF power threshold press the toggle switch up. To decrease the RF power threshold press the toggle switch down. The threshold will be shown in dBm.

<b>SET</b>
<i>MINA</i>
<i>MINB</i>
<i>dbm threshold</i>

The threshold will be shown in dBm.



**The power reading is reliable to –45dBm.**

**Do not set the threshold for switching below –45dBm.**

#### 4.2.8. Changing the Orientation of the Text on the Display

The *DISP* display allows the user to select a horizontal or vertical orientation for the displays to accommodate mounting the module in the 3RU or 1RU frames. To change the orientation of the display press the toggle switch.

SET
DISP
HORZ
VERT

The following list describes the available menu options.

**VERT** Vertical orientation suitable for modules installed in the 3RU frame  
**HOR** Horizontal orientation suitable for modules installed in the 1RU frame

#### 4.2.9. Selecting High or Low as GPI Active State

The 7703BPX-IF allows setting the Active state of the GPIs as high or low. Enter the SET menu and toggle to the ACTV menu item.

SET
ACTV
HIGH
LOW

The following list describes the available menu options.

**HIGH** Sets the selected GPI input to high  
**LOW** Sets the selected GPI input to low

#### 4.2.10. Performing a Factory Reset

The 7703BPX-IF allows performing a factory reset of card parameters. Enter the SET menu and navigate to the FRST menu item, then toggle to 'YES' and hit the pushbutton. This restores the default parameters of the card. The default operating mode is External and the default threshold levels are -45dBm for both channels.

SET
FRST

Selecting the *FRST* menu item will restore the card's parameters to factory default.

## 5. DIP SWITCHES ( 7702BPX-IF ONLY )

The 7702BPX-IF is equipped with a 4 position DIP switch to allow the user to select the operating modes. DIP switch 1 is located at the top of the DIP switch (farthest from to the card ejector). Table 5-1 gives an overview of the DIP switch functions. Sections 5.1 and 5.2 give a detailed description of each of the DIP switch functions. The On position is down, or closest to the printed circuit board. See section 4.2.6 for a description of the operating modes.

DIP Switch	Function
1	Manual Mode Enable
2	CH A/B ( Manual Mode) – Switch Back Select ( Auto Mode )
3	External GPI Mode Enable
4	GPI Active HIGH / Active LOW select

**Table 5-1: DIP Switch Functions**

### 5.1. CONTROLLING THE SWITCH OPERATING MODE

DIP switches 1, 2, and 3 allow the user to select one of four operating modes for the 7702BPX-IF.

DIP 1	DIP 2	DIP 3	Mode	Description
Off	Off	Off	Auto	If channel A is active, it will switch to channel B if A falls below threshold (and if B is above threshold). If A rises above threshold, channel B will remain the active channel, unless channel B falls below threshold, then the module will switch back to A (if A is above threshold)
Off	On	Off	Auto Switch Back	Channel A is the main input and Channel B is standby. If A falls below threshold, it will switch to B (if B is above threshold). When A returns to a level above threshold, it will switch back to A.
On	Off	Off	Manual Mode	Selects Channel A
On	On	Off		Selects Channel B
Off	Off	On	External GPI	Operating mode controlled via GPIs. See section 5.2 for controlling operating modes via GPI in external mode.

**Table 5-2: Operating Mode Switch Settings**



## 5.2. CONTROLLING THE SWITCH USING GPI INPUTS

In External GPI mode, the Switch mode is selectable based on the GPI1 and GPI2 settings. Table 5-4 shows the settings to achieve the desired switch state. The *Auto Switch Back* and *No Auto Switch Back* Modes operate as described in Table 5-2. DIP switch 4 controls whether GPIs are active when high or low in external mode. When the module is in Manual mode or one of the Auto modes, DIP 4 has no effect.

DIP 4	GPI Active State
Off	Active low
On	Active high

**Table 5-3: GPI Active State Switch Settings**

Operating	Manual		Auto	
Mode	CH A	CH B	Switch Back	No Switch Back
GPI1	Active	Inactive	Inactive	Active
GPI2	Inactive	Active	Inactive	Active

**Table 5-4: Controlling the switch Using GPI Inputs – 7702BPX-IF**

## 6. JUMPERS

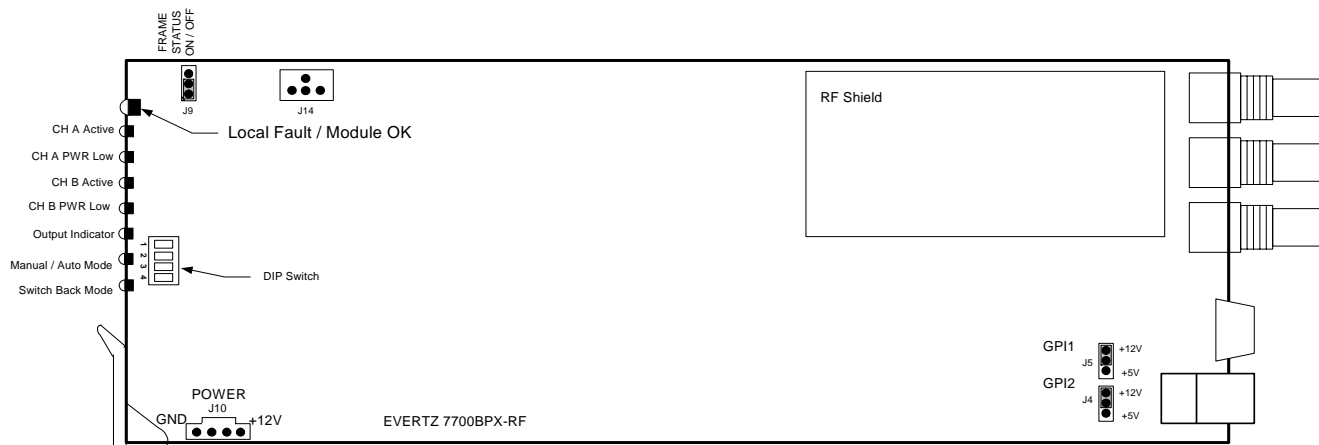


Figure 6-1: Location of Jumpers – 7702BPX-IF

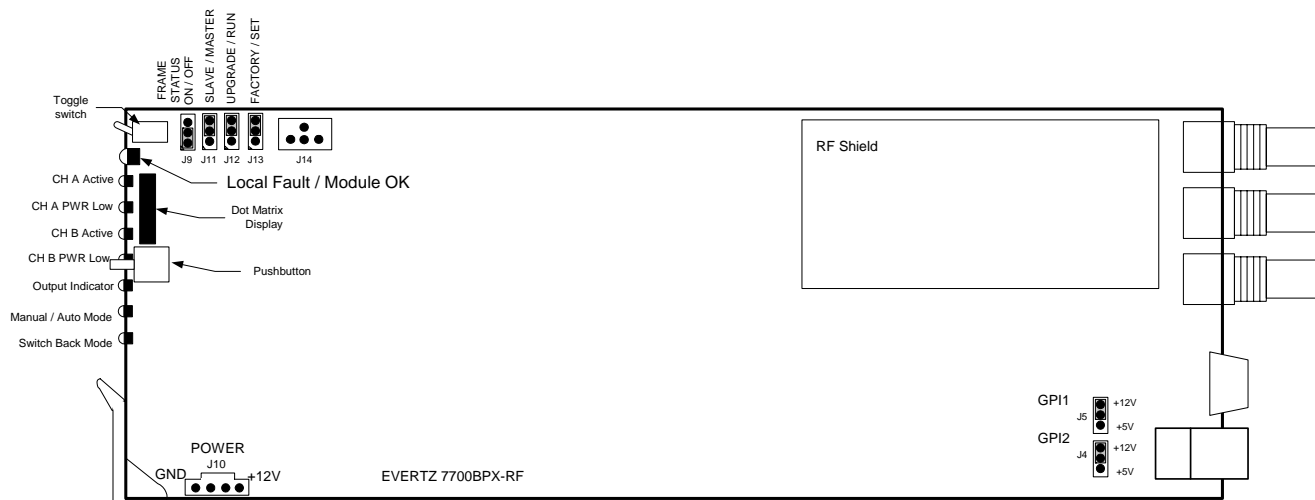


Figure 6-2: Location of Jumpers – 7703BPX-IF

### **6.1. SELECTING WHETHER LOCAL FAULTS WILL BE MONITORED BY THE GLOBAL FRAME STATUS**

The FRAME STATUS jumper J9 located at the front of the module determines whether local faults (as shown by the Local Fault indicator) will be connected to the 7700FR frame's global status bus.

**FRAME STATUS:** To monitor faults on this module with the frame status indicators (on the Power Supply FRAME STATUS LED's and on the Frame's Fault Tally output) install this jumper in the On position. (Default)

When this jumper is installed in the Off position local faults on this module will not be monitored.

### **6.2. MONITORING AND CONTROL OF 7703BPX-IF CARDS THROUGH SNMP OR CARD EDGE MENU SYSTEM**

The card does not require any reconfiguration or adjustment to monitor and control through SNMP or the card edge menu system. Updates to configuration and status are visible in both systems.

### **6.3. CONFIGURING THE MODULE FOR FIRMWARE UPGRADES (7703BPX-IF ONLY)**

**UPGRADE:** The UPGRADE jumper J12 is used when firmware upgrades are being done to the module. For normal operation it should be installed in the *RUN* position. See the *Upgrading Firmware* chapter in the front of the manual binder for more information.

To upgrade the firmware in the module unit pull it out of the frame. Move the UPGRADE jumper into the *UPGRADE* position. Install the Upgrade cable provided (located in the vinyl pouch in the front of this manual) onto the SERIAL header J14 at the card edge. Re-install the module into the frame. Run the upgrade as described in the *Upgrading Firmware* chapter of this manual. Once the upgrade is completed, remove the module from the frame, move the UPGRADE jumper into the *RUN* position, remove the upgrade cable and re-install the module. The module is now ready for normal operation.

### **6.4. SELECTING THE GPI PULL-UP VOLTAGE**

The GPI jumpers J4 and J5, located at the rear of the module, selects whether the general purpose inputs GPI1 and GPI2 will be pulled up to +5 volts or +12 Volts. Figure 2-2 shows the jumper configuration and the GPI input schematic. Jumper J5 is used for GPI1 and J4 is used for GPI2.

**GPI:** To set the pull-up voltage to +5 volts set the jumper to the LO position,  
To set the pull-up voltage to +12 volts set the jumper to the HI position,

### **6.5. USING THE GPO OUTPUTS**

There are three pins on the 6 pin terminal strip dedicated to the GPO, NC (Normally Closed), NO (Normally Open) and Common, connected as shown in the circuit diagram of section 2.1. The common connection will switch between NC and NO on a change in state of the RF switch. This GPO is intended to indicate a change in state of the switch. The signals on NC and NO are to be provided by the user.

## 7. VistaLINK® REMOTE MONITORING/CONTROL (7703BPX-IF ONLY)

### 7.1. What is VistaLINK®?

VistaLINK® is Evertz's remote monitoring and configuration platform which operates over an Ethernet network using Simple Network Management Protocol (SNMP). SNMP is a standard computer network protocol that enables different devices sharing the same network to communicate with each other. VistaLINK® provides centralized alarm management, which monitors, reports, and logs all incoming alarm events and dispatches alerts to all the VLPro Clients connected to the server. Card configuration through VistaLINK® PRO can be performed on an individual or multi-card basis using simple copy and paste routines, which reduces the time to configure each module separately. Finally, VistaLINK® enables the user to configure devices in the network from a central station and receive feedback that the configuration has been carried out.

There are 3 components of SNMP:

1. An SNMP manager also known as a Network Management System (NMS) is a computer running special software that communicates with the devices in the network. Evertz VistaLINK® Pro Manager graphical user interface (GUI), third party or custom manager software may be used to monitor and control Evertz VistaLINK® enabled fiber optic products.
2. Managed devices (such as 7703BPX-IF cards), each with a unique address (OID), communicate with the NMS through an SNMP Agent. Evertz VistaLINK® enabled 7700 series modules reside in the 3RU 7700FR-C MultiFrame and communicate with the manager via the 7700FC VistaLINK® frame controller module, which serves as the Agent.
3. A virtual database known as the Management Information Base (MIB) lists all the variables being monitored, which both the Manager and Agent understand. Please contact Evertz for further information about obtaining a copy of the MIB for interfacing to a third party Manager/NMS.

For more information on connecting and configuring the VistaLINK® network, see the 7700FC Frame Controller chapter.

### 7.2. VistaLINK® MONITORED PARAMETERS

The following parameters can be remotely monitored through the VistaLINK® interface.

Parameter	Description
Input A RF Power	A range of values describing received RF power at the input A
Input B RF Power	A range of values describing received RF power at the input B
GPI1 State	Indicates the state of the GPI1 input
GPI2 State	Indicates the state of the GPI2 input
Active Channel	Indicates input A or B as the active channel
Card Type	Indicates card type as 7703BPX-IF

**Table 7-1: VistaLINK® Monitored Parameters**

### 7.3. VistaLINK® CONTROLLED PARAMETERS

The following parameters can be remotely controlled through the VistaLINK® interface.

Parameter	Description
Operating Mode	Sets the operating mode for the module: <ul style="list-style-type: none"><li>- External ( Controlled by GPIs )</li><li>- Auto / No Switch Back</li><li>- Auto / Switch Back</li><li>- Channel A</li><li>- Channel B</li></ul>
RF Threshold A	Sets the value of the Input A RF threshold
RF Threshold B	Sets the value of the Input B RF threshold
Active State for GPIs	Sets the active state for GPIs - High or Low

**Table 7-2: VistaLINK® Controlled Parameters**

### 7.4. VistaLINK® TRAPS

The following traps can be controlled through the VistaLINK® interface. Each trap will indicate a fault condition when its value is True.

Trap	Description for True Condition
ChannelAweak	Channel A input power is below the threshold
ChannelBweak	Channel B input power is below the threshold

**Table 7-3: VistaLINK® Traps**

*This page left intentionally blank*