



**CONFIDENCE IS EVERYTHING.™**

---

World Leader of In-Rack, Audio, Video, Data Monitoring, and Closed Captioning Solutions

---

## **HRS-1S**

Half Rack Analog Stereo Audio Speaker  
Monitor

User Guide

**Part Number 821535, Revision D**

---

© 2010 Wohler Technologies, Inc. and PANORAMA. All rights reserved.

This publication is protected by federal copyright law. No part of this publication may be copied or distributed, stored in a retrieval system, or translated into any human or computer language in any form or by any means electronic, mechanical, manual, magnetic, or otherwise, or disclosed to third parties without the express written permission of Wohler Technologies.

## Reproduction

Licensed users and authorized distributors of Wohler Technologies, Inc. products may copy this document for use with Wohler Technologies, Inc. products provided that the copyright notice above is included in all reproductions.

## Customer Support

Wohler Technologies, Inc.  
31055 Huntwood Avenue  
Hayward, CA 94544  
www.wohler.com

Phone: 510-870-0810  
FAX: 510-870-0811  
US Toll Free: 1-888-596-4537  
(1-888-5-WOHLER)  
Web: www.wohler.com  
Sales: sales@wohler.com  
Support: support@wohler.com

## Disclaimers

Even though Wohler Technologies, Inc. has tested its equipment and software, and reviewed the documentation, Wohler Technologies, Inc. makes no warranty or representation, either express or implied, with respect to software, documentation, their quality, performance, merchantability, or fitness for a particular purpose.

Wohler Technologies, Inc. reserves the right to change or improve our products at any time and without notice.

In no event will Wohler Technologies, Inc. be liable for direct, indirect, special, incidental, or consequential damages resulting from any defect in the hardware, software, or its documentation, even if advised of the possibility of such damages.

Some states do not allow the exclusion or limitation for incidental or consequential damages, so the above exclusion or limitation may not apply to you.

## Printing

This document is intended to be printed on a duplex printer, such that the copy appears on both sides of each page. This ensures that all new chapters start on a right-facing page.

This document looks best when printed on a color printer since some images may be indistinct when printed on a black and white printer.

## Other Technologies and Products

Dolby, Dolby Digital, Dolby D, and Dolby E are registered trademark of Dolby Laboratories, Inc.

Microsoft Windows, and Internet Explorer are registered trademarks of Microsoft Corporation.

## Last Update

September 20, 2010

# HRS-1S User Guide

---

## Introduction

### Overview

---

The HRS-1S audio monitor provides self-powered, fidelity monitoring in the very smallest rack space possible. The HRS-1S contains two high performance transducers driven by two separate power amplifiers. One amplifier/driver combination handles midrange and high frequency information, while the other channel reproduces information below the 500 Hz crossover point. Stereo signals are summed to the midrange/woofer combo for reproduction through the monaural speaker system, while the full dual channel signal is sent to a headphone output for full stereo (left and right channel) monitoring.

### Topics

---

Topics	Page
Introduction	1
Safety Instructions	2
Installation Recommendations	3
Description	3
Features	4
Specifications	5
Front Panel Features	6
Rear Panel Connectors	7
Technical Functional Overview	8

# Safety Instructions

1. Read, keep, and follow all of these instructions; heed all warnings.
2. Do not use this equipment near water.
3. Use only a dry cloth to clean the equipment.
4. Do not block any ventilation openings. Install only in accordance with the instructions in the section entitled, "[Installation Recommendations](#)" on [page 3](#).
5. Do not install near any heat source such as a radiator, heat register, amplifier, or stove.
6. Do not expose the equipment to rain or moisture.
7. Do not attempt to plug the unit into a two-blade outlet (with only two prongs of equal width).

**IMPORTANT:** By design, these monitors will only plug into a three-prong outlet for your safety. If the plug does not fit into your outlet, contact an electrician to replace the obsolete outlet.

8. Protect the power cord from being walked on or pinched, particularly at plug's source on the equipment and at the socket.
9. Use only the attachments/accessories specified by the manufacturer.
10. Unplug the equipment during lightning storms or when unused for long periods of time.
11. Refer all servicing to qualified service personnel. Servicing will be required under all of the following conditions:
  - The equipment has been damaged in any way, such as when the power-supply cord or plug is damaged.
  - Liquid had been spilled or objects have fallen onto the equipment.
  - The equipment has been exposed to rain or moisture.
  - The equipment does not operate normally.
  - The equipment has been dropped.

# Installation Recommendations

## Mounting

---

The unit is designed to install into a standard 19" rack mounted at eye level for best visual observation of the monitor screens.

## Heat Dissipation

---

The ambient temperature inside the mounting enclosure should not exceed 40° Celsius (104° Fahrenheit). Adjacent devices can be rack mounted (or stacked) in proximity to the unit if the above temperature is not exceeded. Allow a 1RU (1.75"/44.45mm) space above and below the unit for air circulation.

**Important:** To reduce noise, the monitor does not have any fans. As a result, the heat generated by the class D power amplifiers, power supplies, and other components is vented by slots in the side of the unit. Therefore, as a safety precaution, we advise you to be sure to allow proper ventilation on both sides of the unit.

## Power

---

The unit comes with a standard 24VDC/3.0A external power supply that connects an A/C mains power source (65W, 100 to 240 VAC, 50/60Hz) to the IEC connector provided on the rear panel of the unit.

## Description

The HRS-1S comes equipped with a ganged stereo volume control, power indication LED, stereo/mono toggle switch, and headphone output. Output limiter circuits are incorporated to protect the speakers, and extensive magnetic shielding allows placement immediately adjacent to video monitors with no color impurities.

The HRS-1S features one pair of balanced XLR inputs and one pair of XLR loop-through connectors for connecting to downstream equipment.

## Features

- 95 dB SPL at two feet
- Only one rack space high and one half-rack wide
- Excellent high frequency response for positive detection of background whine and noise
- Audible indication of phase/polarity problems
- Thorough magnetic shielding for placement next to video monitors
- Quick and easy installation: simply slide in the rack and connect audio and AC power
- Stereo inputs summed to the monaural midrange/woofer speaker system
- Full stereo monitoring through the headphone output
- Two analog inputs on balanced XLR connectors
- Two analog loop-through outputs on balanced XLR connectors
- Stereo/mono toggle switch on front panel
- Green power indication light and volume control on front panel

# Specifications

The specifications of the HRS-1S are listed below.


**Table 1–1 HRS-1S Specifications**

Specification	Domain Range
Input Impedance	40K $\Omega$ (balanced)
Input Level for Maximum Output (Volume Full On)	0 dBv balanced; +10 dB unbalanced
Input Overload	+26 dBv balanced; +14 dBv unbalanced
Peak Acoustic Output (at 2 ft.)	95 dB SPL
Response (6th Octave)	80 Hz - 16 kHz $\pm$ 7 dB (-10 dB @ 50 Hz, 22 kHz)
Power output	
RMS Mid-Range	10 W transient / 5 W continuous
RMS Bass	20 W transient / 10 W continuous
Distortion, Electrical	Less than 0.15% at any level below limit threshold
Distortion, Acoustic	8% or less at worst case frequencies above 180 Hz including cabinet resonance; typically less than 2%
Hum and Noise	Better than -68 dB below full output
Magnetic Shielding	Less than 1 Gauss any adjacent surface
Input Connectors	Balanced: XLR
Power Consumption (Average Maximum)	35 W
AC Mains input:	100-240VAC, 50-60 Hz
Dimensions (H x W xD)	1.75 x 8.5 x 7.5 inches 44.5 x 216 x 190 mm
Weight:	7 lbs. (3.2 kg)

**Note:** All of the specifications listed above are subject to change without notice.

# Front Panel Features

Figure 1–1 Front Panel Features

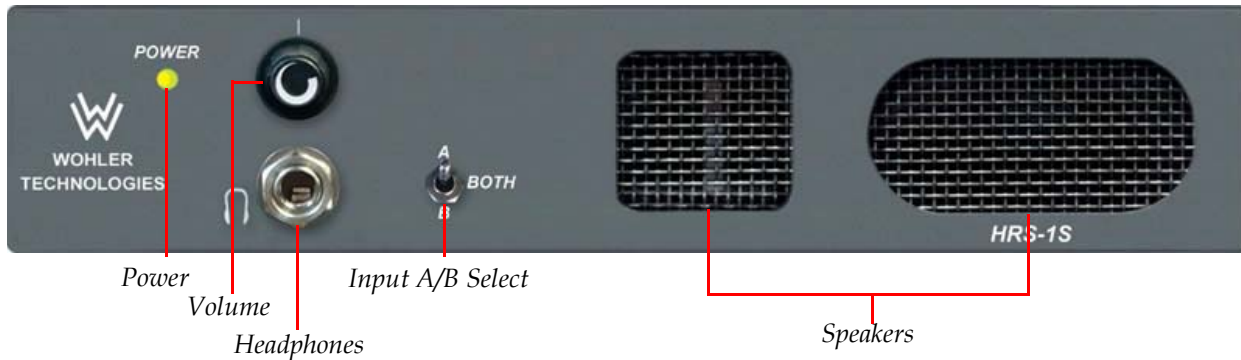


- **Power Indication** (Green LED): This LED glows green to indicate the HRS-1S is connected to operational mains power.
- **Headphone Output** (1/4" Jack): For full stereo monitoring use the headphone output feature. Note that in order to monitor the audio in stereo through the headphones you will need to place the A/B select switch to both. When you plug in headphones, the internal speakers will mute. This jack accepts a standard 1/4" phone type stereo plug.
- **Volume Control** (Rotary Pot): This controls the loudness of the audio reproduced by the internal speakers or connected headphone. Clockwise rotation of this control increases the loudness of the monitored audio.
- **A/B Select** (Three-Position Toggle Switch): Use both to sum the two channel stereo signals together, or A (or B) to select only one channel for monaural monitoring through the speakers or headphones. Note that this switch has no effect on the line output.
- **Speakers**: The HRS-1S internal speaker system is comprised of one mid-range/tweeter speaker and one woofer speaker. The mid-range speaker reproduces only the mid and high frequencies, while the woofer speaker reproduces the low frequencies. The two channels of the stereo input signal are summed together into a monaural signal for reproduction from the speaker system.




# Rear Panel Connectors

Figure 1–2 Rear Panel Connectors

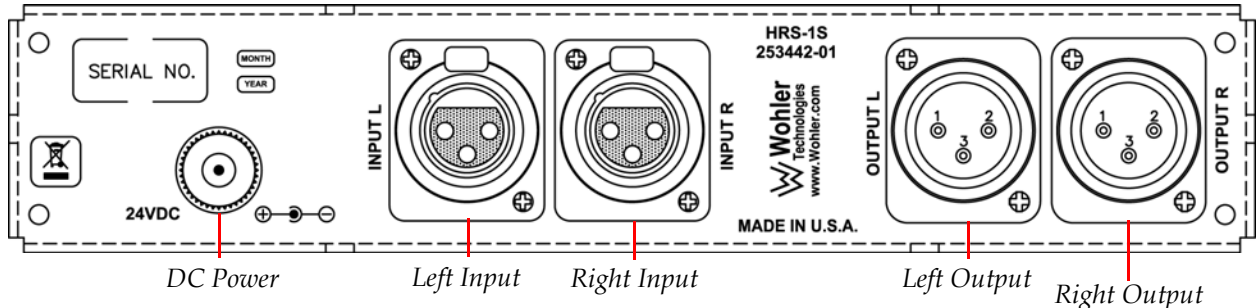


- **Power** (External Power Supply Connector): Attach the supplied 24 VDC power supply module between this connector and mains power (100 - 250VAC, 50/60 Hz). The front panel power LED will glow green to indicate operating voltages are present.
- **Balanced Inputs** (L and R - Three-Pin Female XLR Connectors): These two balanced XLR connectors (left and right) accept standard analog audio signals. Pinout information for connectors is shown below.

Figure 1–3 Female XLR Pin-Out

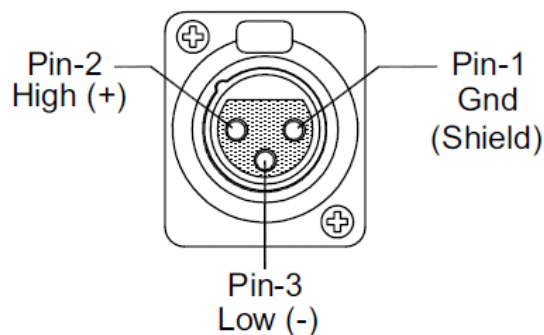

- **Loop-Through Outputs** (L and R - Three-Pin Male XLR Connectors): These two XLR connectors output a balanced analog audio loop-through of the signals entering the balanced inputs. Pinout information for connectors is shown below.

Figure 1–4 Male XLR Pin-Out

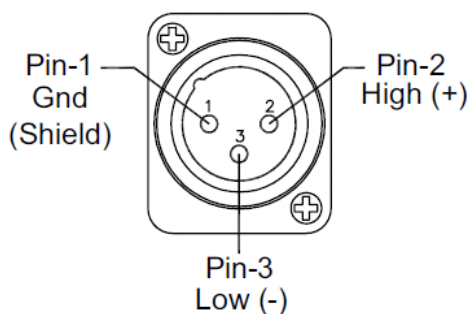

## Technical Functional Overview

Figure 1–5 illustrates the functionality of the HRS-1S.

Figure 1–5 HRS-1S Block Diagram

