

TABLE OF CONTENTS

1. OVERVIEW	1-1
1.1. SUMMARY	1-1
1.2. HOW TO USE THIS MANUAL	1-2
1.3. DEFINITIONS	1-3
2. INSTALLATION	2-1
2.1. REAR PANEL OVERVIEW	2-1
2.1.1. Video Connections	2-1
2.1.2. Reference Video Connections	2-2
2.1.3. Serial I/O Connections	2-2
2.1.3.1. Serial Port Pin Out Definitions	2-4
2.1.4. GPI/O Connections	2-4
2.1.5. Ethernet Network Connections	2-5
2.2. MOUNTING	2-5
2.3. POWER REQUIREMENTS	2-5
2.4. CONNECTING THE REMOTE CONTROL PANEL	2-5
2.5. CONNECTING THE VIDEO	2-6
2.5.1. Video Inputs	2-6
2.5.2. Video Outputs	2-7
2.5.3. Genlock Reference	2-7
2.6. CONNECTING THE LINEAR TIME CODE	2-7
2.7. CONNECTING TO AN ETHERNET NETWORK	2-7
2.8. CONNECTING THE GENERAL PURPOSE INPUTS AND OUTPUTS	2-8
2.9. CONNECTING THE OPTIONAL TEMPERATURE PROBE	2-12
2.10. MODULE CONFIGURATION	2-13
2.11. CONFIGURING THE MODULE USING THE MODULE SERIAL PORT	2-13
2.11.1. Network Configuration	2-14
2.12. HOW TO INCORPORATE A ROUTER	2-15
2.12.1. Using a Xenon Router	2-15
2.12.2. Using a X1200 Series Router	2-15
3. HOW TO OPERATE THE DOWNSTREAM KEYER USING VISTALINK® PRO	3-1
3.1. WHAT IS VISTALINK®?	3-1
3.2. VIDEO TAB	3-2
3.2.1. Video Standard	3-2
3.2.2. Reference Type	3-3
3.2.3. Horizontal Output Offset	3-3
3.2.4. Vertical Output Offset	3-3
3.2.5. Video Mandatory Input	3-3

3.3. TIME TAB.....	3-4
3.3.1. Displaying Real Time Clock	3-5
3.3.2. Displaying the Universal Time Clock Time	3-5
3.3.3. Displaying the Local Time	3-5
3.3.4. Displaying the Local Date	3-5
3.3.5. Displaying the Universal Date	3-5
3.3.6. Displaying the Real Time Date	3-5
3.3.7. Enabling Daylight Saving Time Compensation	3-6
3.3.8. Selecting Whether the Time Code Input is UTC or Local Time	3-6
3.3.9. Setting the LTC Date Format	3-6
3.3.10. LTC Presence Detection Enabled.....	3-6
3.3.11. Synchronizing the Real Time Clock to the UTC Time	3-7
3.3.12. Setting the Time Zone Offset	3-7
3.3.13. Up Down Timer	3-7
3.3.13.1. Setting the Up Down Timer	3-7
3.4. NETWORK TAB.....	3-8
3.4.1. Network IP Address	3-8
3.4.2. Sub Net Mask	3-8
3.4.3. Gateway.....	3-8
3.4.4. MAC Address.....	3-9
3.5. GENERAL TAB.....	3-9
3.5.1. Firmware Version.....	3-9
3.5.1.1. Monitoring the Build Number	3-9
3.5.1.2. Enabling Reboot.....	3-9
3.5.2. Port Entry	3-9
3.5.3. General	3-11
3.5.3.1. Automation Debug and M2100 Debug Functions	3-11
3.5.4. Controls.....	3-11
3.5.4.1. Monitoring the Genlock Status	3-11
3.5.4.2. Setting the Router Enable	3-11
3.5.4.3. Configuring the Router Select	3-11
3.5.5. MCP Controls.....	3-12
3.6. DSK TAB.....	3-12
3.6.1.1. Setting the Key Type	3-13
3.6.1.2. Setting the Key Gain	3-13
3.6.1.3. Setting the Key Offset	3-13
3.6.1.4. Setting the Key Threshold	3-13
3.6.1.5. Setting the Auto Key Enable	3-13
3.7. MATTE TAB.....	3-14
3.7.1. Matte Parameters	3-14
3.7.1.1. Setting the Matte Enable Function	3-14
3.7.2. Setting a User Defined Matte Aspect Ratio	3-14
3.7.2.1. Setting the Matte Top	3-14
3.7.2.2. Setting the Matte Bottom.....	3-14
3.7.3. Setting the Matte Aspect Ratio	3-15
3.8. GPI/GPO CONTROL TAB.....	3-15
3.8.1. Configuring the GPO Outputs	3-16
3.8.2. Configuring the GPI Inputs.....	3-17
3.8.2.1. Target Logo	3-17

3.8.2.2.	Configuring the Perform Transition Function	3-17
3.8.2.3.	Configuring the Load Preset Function.....	3-17
3.8.2.4.	Configuring the Action.....	3-18
3.8.2.5.	Configuring the Logo Function	3-18
3.9.	TEMPERATURE TAB	3-19
3.9.1.	Setting the Temperature Format.....	3-19
3.9.2.	Setting the Temperature Source.....	3-19
3.9.3.	Setting the Static Temperature	3-20
3.9.4.	Temperature Read Loss	3-20
3.10.	TRANSITION TAB	3-20
3.10.1.	Setting the Transition Type.....	3-20
3.10.2.	Setting the Transition Rate	3-21
3.10.3.	Setting the Transition Swap Mode	3-21
3.10.4.	Pausing a Transition	3-22
3.10.5.	Setting Program Bus Change	3-22
3.11.	EAS TAB	3-22
3.11.1.	EAS over TCP/IP	3-22
3.11.1.1.	Setting the EAS Vertical Position	3-23
3.11.1.2.	Setting the EAS Font.....	3-23
3.11.1.3.	Setting the EAS Height	3-23
3.11.1.4.	Setting the EAS Rate	3-23
3.11.2.	EAS Colour Settings	3-23
3.12.	PRESETS TAB.....	3-24
3.13.	MEDIA TAB.....	3-25
3.13.1.	General Control.....	3-25
3.13.1.1.	Setting the Control Bypass.....	3-25
3.13.2.	Preview Channel.....	3-26
3.13.2.1.	Setting the Video Input.....	3-26
3.13.2.2.	Setting the DSK Layer.....	3-26
3.13.2.3.	Setting the Logo Layer	3-26
3.13.2.4.	Setting the DSK 2 Layer.....	3-26
3.13.3.	Program Control.....	3-26
3.13.3.1.	Setting the Video Input.....	3-26
3.13.3.2.	Setting the DSK Layer.....	3-26
3.13.3.3.	Setting the Logo Layer	3-26
3.13.3.4.	Setting the DSK Layer 2.....	3-26
3.13.4.	Voice Over Control.....	3-27
3.13.5.	Transition Control.....	3-27
3.13.6.	Command Status	3-27
3.13.7.	Media All Out	3-28
3.13.8.	Static Logo Configuration Settings.....	3-28
3.13.8.1.	Setting the Logo Horizontal Position	3-28
3.13.8.2.	Setting the Logo Vertical Position	3-28
3.13.8.3.	Setting the Logo Transparency (Gain)	3-29
3.13.8.4.	Setting the Logo Fade In Duration	3-29
3.13.8.5.	Setting the Logo Display Time (Hold)	3-29
3.13.8.6.	Setting the Logo Fade Out Duration	3-29
3.13.8.7.	Setting the Up Down Timer	3-29
3.13.9.	Crawl Logo Configuration Settings	3-29

3.13.9.1. Setting the Crawl Logo Horizontal Position	3-30
3.13.9.2. Setting the Crawl Logo Vertical Position	3-30
3.13.9.3. Setting the Crawl Logo Transparency (Gain)	3-30
3.13.9.4. Setting the Crawl Logo Fade In Duration	3-30
3.13.9.5. Setting the Crawl Logo Display Time (Hold)	3-31
3.13.9.6. Setting the Crawl Logo Fade Out Duration	3-31
3.13.9.7. Setting the Up Down Timer	3-31
3.13.9.8. Setting the Crawl Rate	3-31
3.13.9.9. Setting the Crawl Repeats Count.....	3-31
3.13.9.10. Setting the Crawl Pause Frequency	3-31
3.13.9.11. Setting the Crawl BG Opacity	3-31
3.13.9.12. Setting the Font Height.....	3-32
3.13.9.13. Setting the Font Name.....	3-32
3.13.10. Setting the Crawl Logo Colours	3-32
3.13.10.1. Setting the Crawl Outline Opacity.....	3-32
3.13.10.2. Setting the Logo Layer	3-32
3.13.10.3. Logo Quick In/Fade Out Effect	3-33
3.13.11. Selecting a Logo or Media Item and Issuing a Fade/Cue/Fade Out.....	3-33
3.13.12. Audio Clip Configuration Settings.....	3-34
3.13.13. Setting the Audio Clip Repeat Count.....	3-34
3.14. AUDIO CONTROL TAB	3-35
3.14.1. Parameters	3-35
3.14.2. Settings	3-36
3.14.3. Wav File Playback	3-37
4. HOW TO OPERATE THE DOWNSTREAM KEYER	
USING THE REMOTE CONTROL PANEL.....	4-1
4.1. AN OVERVIEW OF KEY AND DISPLAY FUNCTIONS.....	4-1
4.1.1. Preview Bus Button Group.....	4-1
4.1.2. Program Bus Button Group.....	4-2
4.1.3. The Function Button Group.....	4-2
4.1.4. Setup Button Group	4-3
4.1.5. Control Panel Status Indicators	4-4
4.1.5.1. Preview Bus Status Indicators.....	4-4
4.1.5.2. Program Bus Status Indicators.....	4-4
4.1.5.3. Function Status Indicators.....	4-4
4.1.6. Electronics Unit Status Indicators	4-5
4.1.7. Front Panel Display Functions	4-5
4.2. OVERVIEW OF FRONT REMOTE CONTROL PANEL OPERATION.....	4-5
4.2.1. Displaying Logos.....	4-5
4.3. AN OVERVIEW OF THE SETUP MENU SYSTEM.....	4-5
4.4. NAVIGATING THE SETUP MENU.....	4-6
4.5. FRONT PANEL SETUP MENU – MAIN MENU	4-8
4.6. GENERAL CONFIGURATION ITEMS.....	4-9
4.6.1. Selecting the Video Standard	4-10
4.6.2. Setting the Video Output Timing With Respect To Reference	4-10
4.6.3. Viewing the Firmware Version and Performing an Upgrade	4-11
4.6.4. Configuring the Real Time Clock	4-11

4.6.4.1.	Displaying the Local Time	4-12
4.6.4.2.	Displaying the UTC Time	4-12
4.6.4.3.	Setting the Real Time Clock.....	4-12
4.6.4.4.	Setting the Time Zone Offset	4-13
4.6.4.5.	Enabling Daylight Saving Time Compensation	4-13
4.6.4.6.	Selecting Whether the Time Code input is UTC or Local Time.....	4-13
4.6.4.7.	Synchronizing the Real Time Clock to the UTC Time	4-14
4.6.4.8.	Displaying the Local Date	4-14
4.6.4.9.	Displaying the UTC Date.....	4-14
4.6.4.10.	Setting the Real Time Date	4-14
4.6.4.11.	Setting the LTC Date Format	4-15
4.6.5.	Setting Up the Network Addresses	4-15
4.6.5.1.	Setting Up the IP Address	4-15
4.6.5.2.	Setting Up the Sub Net Mask.....	4-15
4.6.5.3.	Setting Up the Gateway	4-15
4.6.5.4.	Displaying the Ethernet Hardware Address	4-16
4.6.6.	Displaying SNMP Trap Destination.....	4-16
4.6.7.	Displaying AFD Logo Trigger.....	4-16
4.6.8.	Setting the Serial Protocol for COM Ports D and E	4-16
4.6.9.	Setting the Genlock Status	4-17
4.6.10.	Protecting Line 21 Captions.....	4-18
4.6.11.	Setting the Unit Name.....	4-18
4.6.12.	Setting the Up Down Timer.....	4-18
4.6.13.	Automation Debug Functions.....	4-19
4.7.	FILE MANAGEMENT CONFIGURATION ITEMS.....	4-20
4.7.1.	Selecting the Source Media	4-20
4.7.2.	Selecting the Media File Name	4-20
4.7.3.	Selecting the Destination Media	4-21
4.7.4.	Deleting a File	4-21
4.7.5.	Erasing all the Files from a Media Disk.....	4-21
4.8.	MATTE CONFIGURATION ITEMS	4-21
4.8.1.	Turning the Matte On and Off	4-22
4.8.2.	Setting the Matte Aspect Ratio	4-22
4.8.3.	Setting a User Defined Matte Aspect Ratio	4-22
4.9.	DOWNSTREAM KEYS CONFIGURATION ITEMS.....	4-23
4.9.1.	Setting the Downstream Key Type	4-23
4.9.2.	Setting the Downstream Key Object Transparency	4-23
4.9.3.	Setting the Downstream Key Object Offset	4-24
4.9.4.	Setting the Downstream Self Key Threshold	4-24
4.9.5.	Allowing Automation to Control the Media Layer	4-24
4.10.	TRANSITION CONFIGURATION ITEMS.....	4-24
4.10.1.	Setting the Transition Type	4-25
4.10.2.	Setting the Transition Rate	4-25
4.10.3.	Setting the Transition Swap Mode	4-25
4.10.4.	Pausing a Transition	4-26
4.10.5.	Setting Program Bus Change	4-26
4.11.	PRESET CONFIGURATION ITEMS	4-26
4.11.1.	Configuring the GPI Inputs.....	4-27
4.11.1.1.	Selecting One of the GPI Inputs to Configure	4-27

4.11.1.2. Configuring the GPI Actions	4-28
4.11.2. Configuring the GPO Outputs	4-30
4.11.3. Recalling a User Preset	4-31
4.11.4. Storing a User Preset.....	4-31
4.11.5. Exporting a User Preset.....	4-31
4.11.6. Selecting the Source of the Preset Settings	4-31
4.12. TEMPERATURE CONFIGURATION ITEMS	4-32
4.12.1. Setting the Temperature Source	4-32
4.12.2. Setting the Temperature Format.....	4-32
4.12.3. Setting the Static Temperature	4-33
4.12.4. Temperature Read Loss	4-33
4.13. EAS CONFIGURATION ITEMS (+E OPTIONED UNITS ONLY).....	4-34
4.13.1. TCP/IP	4-34
4.13.2. Setting the Vertical Position of EAS Crawl Display	4-35
4.13.3. Setting the Font used for the EAS Crawl Display	4-35
4.13.4. Setting the Font Size for the EAS Crawl Display	4-35
4.13.5. Setting the Crawl Rate for the EAS Crawl Display.....	4-35
4.13.6. Setting the Colours for the EAS Crawl Display	4-35
4.14. MEDIA CONFIGURATION ITEMS.....	4-37
4.14.1. Setting the Logo Horizontal Position.....	4-38
4.14.2. Setting the Logo Vertical Position	4-38
4.14.3. Setting the Logo Transparency.....	4-38
4.14.4. Setting the Logo Fade In Duration	4-38
4.14.5. Setting the Logo Display Time	4-39
4.14.6. Setting the Logo Fade Out Duration	4-39
4.14.7. Setting the Up Down Timer.....	4-39
4.14.8. Crawl Logo Configuration Items (Crawl Optioned Units Only).....	4-39
4.14.8.1. Setting the Crawl Logo Horizontal Crawl Rate	4-39
4.14.8.2. Setting the Crawl Logo Repeat Count.....	4-40
4.14.8.3. Setting the Crawl Logo Pause Time between Repeats.....	4-40
4.14.8.4. Setting the Crawl Logo Text Font Size.....	4-40
4.14.8.5. Setting the Crawl Logo Text Font.....	4-40
4.14.8.6. Setting the Crawl Logo Transparency	4-40
4.14.8.7. Setting the Crawl Logo Colours.....	4-41
4.14.9. Audio Clip Configuration Items	4-41
4.14.9.1. Setting the Audio Clip Repeat Count.....	4-41
4.14.9.2. Audio Clip Configuration	4-41
5. PLAYLIST COMMANDS.....	5-1
6. HTML AUDIO SETUP PAGE.....	6-1
6.1. HTML SETUP PAGE.....	6-1
6.1.1. Main Index Page	6-1
6.1.2. Wav File Payout.....	6-4
6.1.3. METAR Setup Page.....	6-5
6.1.4. Reboot Page	6-6

7.	HOW TO OPERATE THE DOWNSTREAM KEYS USING THE DESKTOP CONTROL PANEL.....	7-1
7.1.	AN OVERVIEW OF KEY AND DISPLAY FUNCTIONS.....	7-2
7.1.1.	Output Bus Button Group.....	7-2
7.1.2.	Transition Button Group.....	7-3
7.1.3.	Function Button Group.....	7-4
7.1.4.	Shaft Encoder Knobs.....	7-5
7.1.5.	Setup Button Group.....	7-5
7.1.6.	Control Panel Status Indicators.....	7-6
7.2.	OVERVIEW OF DESKTOP CONTROL PANEL OPERATION.....	7-6
7.2.1.	Displaying Logos.....	7-6
7.3.	AN OVERVIEW OF THE SETUP MENU SYSTEM.....	7-6
7.3.1.	Navigating the Setup Menu.....	7-6
8.	TECHNICAL DESCRIPTION	8-1
8.1.	SPECIFICATIONS.....	8-1
8.1.1.	Serial Digital Video Input.....	8-1
8.1.2.	Serial Digital Video Outputs.....	8-1
8.1.3.	Video Reference	8-1
8.1.4.	LTC Reader (on breakout cable)	8-1
8.1.5.	Control (on breakout cable)	8-1
8.1.6.	General Purpose Inputs and Outputs	8-2
8.1.7.	Electrical	8-2
8.1.8.	Physical.....	8-2
8.2.	SLOT BLOCKER	8-3
9.	UPGRADING THE FIRMWARE.....	9-1
9.1.	OVERVIEW	9-1
9.2.	FIRMWARE UPGRADE VIA OVERTURE APPLICATION (RECOMMENDED PROCEDURE)	9-2
9.3.	FIRMWARE UPGRADE VIA TERMINAL PROGRAM.....	9-3
9.3.1.	Step 1: Transferring the File to the CF.....	9-3
9.3.1.1.	Method 1: Using Overture 2	9-3
9.3.1.2.	Method 2: Copy Using a CF Reader	9-4
9.3.2.	Step 2: Serial Upgrade Procedure.....	9-4
9.3.2.1.	Terminal Program Setup	9-4
9.3.2.2.	Initiating Firmware Upgrade Mode from the Terminal Program	9-5
9.3.2.3.	Uploading the New Firmware.....	9-6
9.3.2.4.	Completing the Upgrade	9-7
10.	APPENDIX A.....	10-1
10.1.	GPI SCRIPTING	10-1
10.1.1.	Scripting Object Syntax.....	10-3
10.1.2.	Scenario Samples SAP Programming	10-6
10.1.3.	Bring Up a Trouble Slide Called “trouble”	10-7

11. INDEX.....	11-8
-----------------------	-------------

Figures

Figure 1-1: 7825DSK2-LG-HD Block Diagram.....	1-2
Figure 2-1: 7825DSK2-LG-HD Rear Panel	2-1
Figure 2-2: Keyer GPIO Opto Isolator Circuitry.....	2-9
Figure 2-3: Powering the General Purpose Input Opto-Isolators from the Unit.....	2-10
Figure 2-4: Powering the General Purpose Input Opto-Isolators from an External Power Supply	2-10
Figure 2-5: Powering the General Purpose Output Opto-Isolators from the Unit	2-11
Figure 2-6: Powering the General Purpose Output Opto-Isolators from an External Power Supply	2-11
Figure 2-7: HyperTerminal – Main Menu.....	2-14
Figure 2-8: HyperTerminal – Network Configuration.....	2-14
Figure 3-1: Video Window	3-2
Figure 3-2: Video Mandatory Input Parameters	3-4
Figure 3-3: Time Window	3-4
Figure 3-4: Network Window	3-8
Figure 3-5: General Window.....	3-9
Figure 3-6: DSK Window	3-12
Figure 3-7: Matte Window	3-14
Figure 3-8: GPI/GPO Control Window	3-15
Figure 3-9: Temperature Window.....	3-19
Figure 3-10: Transition Window	3-20
Figure 3-11: Wipe Pattern Angles	3-21
Figure 3-12: EAS Window	3-22
Figure 3-13: Presets Window	3-24
Figure 3-14: Media Window.....	3-25
Figure 3-15: Voice Over Control Options	3-27
Figure 3-16: Static Logo Configuration Settings	3-28
Figure 3-17: Crawl Logo Configuration Settings	3-30
Figure 3-18: “Choose a Colour” Dialog Box	3-32
Figure 3-19: Issuing a Fade/Cue/Fade Out.....	3-33
Figure 3-20: Command Status Table	3-33
Figure 3-21: Audio Clip Configuration Settings	3-34
Figure 3-22: Audio Control Tab	3-35
Figure 4-1: 7825DSK2-LG-HD – Front Remote Control Panel Layout	4-1
Figure 4-2: 7825DSK2-LG-HD – Back Remote Control Panel Layout.....	4-1
Figure 4-3: Overview of the Setup Menu System.....	4-7
Figure 6-1: Main Index Page	6-1
Figure 6-2: HTML Audio Setup Page	6-2
Figure 6-3: Metar Setup Page	6-5
Figure 6-4: HTML Reboot Page	6-6
Figure 7-1: 7825DSK2-LG-HD – Desktop Control Panel Layout	7-1
Figure 8-1: Slot Blocker	8-3
Figure 9-1: Upgrading via Overture.....	9-2
Figure 9-2: Transferring File in Overture	9-4
Figure 9-3: 7700FC Boot Monitor	9-5
Figure 9-4: Second Stage Boot Loader.....	9-6
Figure 9-5: Main Menu	9-6

Tables

Table 2-1: Remote Panel Port Pin Definitions	2-2
Table 2-2: Serial Port C and D – RS422 Pin Definitions	2-3
Table 2-3: Serial Port Pin Definitions.....	2-4
Table 2-4: GPI/O Connector Pin Definitions.....	2-4
Table 2-5: Remote Control Panel Extender Cable	2-6
Table 2-6: Video Input Formats	2-6
Table 2-7: Standard RJ45 Wiring Colour Codes	2-7
Table 2-8: GPIO Maximum Ratings.....	2-12
Table 2-9: Temperature Probe Extender Cable	2-12
Table 4-1: Top Level of the General Setup Menu	4-9
Table 4-2: Top Level of the Manage Files Setup Menu	4-20
Table 4-3: Top Level of the Matte Setup Menu	4-21
Table 4-4: Top Level of the DSK Setup Menu.....	4-23
Table 4-5: Top Level of the Transition Setup Menu	4-24
Table 4-6: Top Level of the Preset Setup Menu.....	4-27
Table 4-7: Top Level of the EAS Setup Menu	4-34
Table 4-8: Top Level of the Media Setup Menu	4-37

REVISION HISTORY

<u>REVISION</u>	<u>DESCRIPTION</u>	<u>DATE</u>
1.0	Original Version	Oct 08
1.1	Updated VistaLINK section	May 09

Information contained in this manual is believed to be accurate and reliable. However, Evertz assumes no responsibility for the use thereof nor for the rights of third parties, which may be affected in any way by the use thereof. Any representations in this document concerning performance of Evertz products are for informational use only and are not warranties of future performance, either expressed or implied. The only warranty offered by Evertz in relation to this product is the Evertz standard limited warranty, stated in the sales contract or order confirmation form.

Although every attempt has been made to accurately describe the features, installation and operation of this product in this manual, no warranty is granted nor liability assumed in relation to any errors or omissions unless specifically undertaken in the Evertz sales contract or order confirmation. Information contained in this manual is periodically updated and changes will be incorporated into subsequent editions. If you encounter an error, please notify Evertz Customer Service department. Evertz reserves the right, without notice or liability, to make changes in equipment design or specifications.

CHAPTER 1
TABLE OF CONTENTS

1. OVERVIEW 1-1

1.1. SUMMARY 1-1

1.2. HOW TO USE THIS MANUAL..... 1-2

1.3. DEFINITIONS 1-3

Figures

 Figure 1-1: 7825DSK2-LG-HD Block Diagram 1-2

This page left intentionally blank

1. OVERVIEW

1.1. SUMMARY

The Evertz 7825DSK2-LG-HD Downstream Keyer and Logo Inserter is a complete package that will insert simultaneous static or animated logos over a full bandwidth HD/SD program video signal. The 7825DSK2-LG-HD has been designed to manage and store multiple logo objects. Logos are stored in non-volatile Flash memory and may be downloaded to the hardware via Ethernet FTP using the Overture™ software. The 7825DSK2-LG-HD has 2 key and fill inputs to allow for two simultaneous independent external keyer sources. It supports two video input sources and preview and program bus outputs.

In addition to the support for an external keyer, up to 16 logos can be keyed simultaneously with independent fade control for each logo. The size of each logo varies and ranges from 1/25th to full screen. The position of the logo, fade rates, clip association and animation rates are also user controllable. The 7825DSK2-LG comes with a playout cache that is upgradeable by the user and 1GB compact flash storage.

The onboard preview allows you to cue your logos for position and content verification prior to going "On Air". Audio clips are stored as stereo 16-bit, 48kHz WAV format. The optional features of the 7825DSK2-LG-HD are: a crawl option that provides the ability to insert crawls with static content and an Emergency Alert Systems (EAS) option for use over Ethernet.

Features

- HD/SD mixer or downstream keyer with full preview.
- Supports 525i/59.94, 16x9 525i, 625i/50, 720p/50, 720p/59.94, 1080i/50, and 1080i/59.94 video formats.
- 64MB CPU Memory
- Variety of smooth transitions including cut, fade and 8 angles of wipes.
- Full 12 bit linear keyer with video fade-in and fade-out processing.
- Stores and inserts up to 16 static logos with independent control of logo position, transparency and offset. Independent controls of fade in and fade out for static logos.
- Download logos from a standard PC via Ethernet using overture software.
- 384MB of playout cache; 1GB of compact flash storage.
- LTC input for analog or digital 'Breakfast Clock' logos.
- 2 DSK Layers.
- Built-in Black Generator.
- 8 channel embedded audio support.
- Automatic equalization up to 250m (Belden 8281 or equivalent cable).
- Video input bypass relays for power failure bypass protection.
- Multiple control interface options including GPI, RS232 automation control.
- Optional rack mount control panel.
- Optional support for static crawls.
- Optional desktop remote control panel available.
- Optional support for Ethernet based Emergency Alert System (EAS)
- Optional temperature probe for temperature logos.

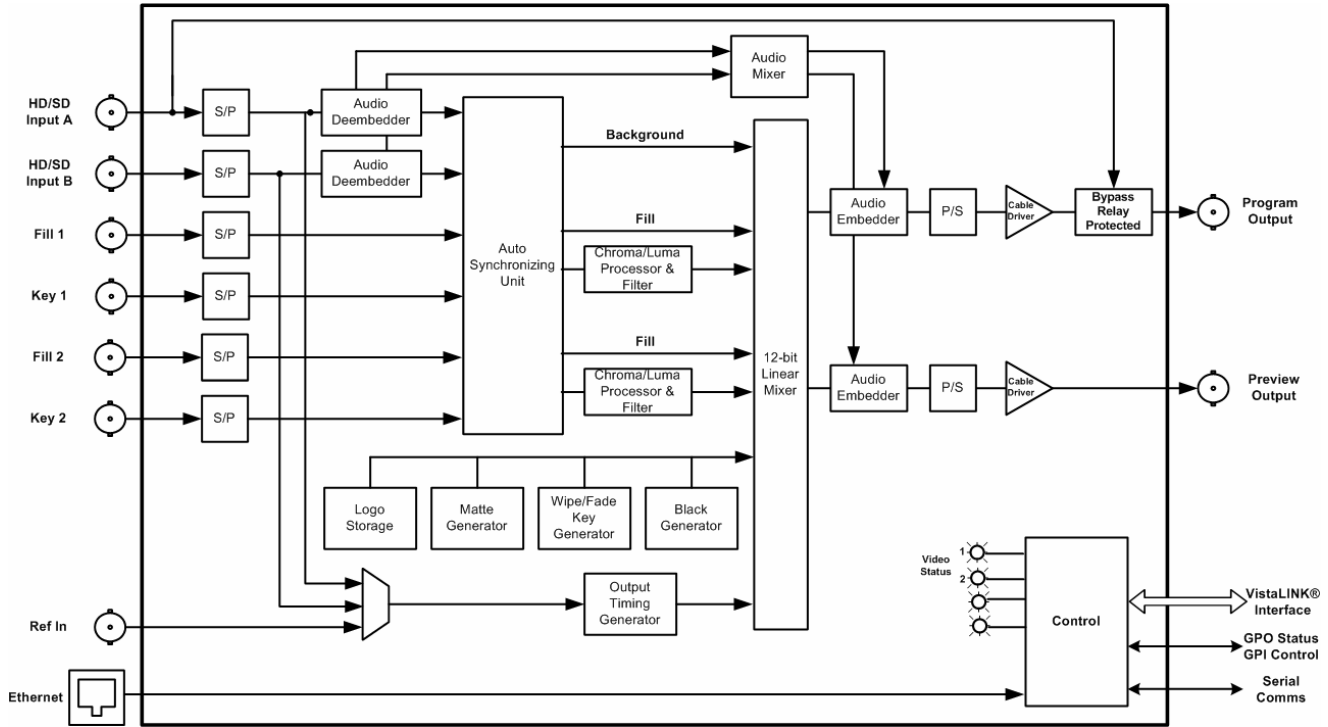


Figure 1-1: 7825DSK2-LG-HD Block Diagram

1.2. HOW TO USE THIS MANUAL

This manual is organized into 8 main chapters: Overview, Installation, *VistaLINK*[®] PRO Front Panel Operation, HTML Audio Setup, Desktop Remote Panel Operation, Technical Description, and Upgrading the Firmware. The overview section contains a brief overview of the 7825DSK2-LG-HD operations, technical features and a glossary to define concepts and terms used throughout the remainder of the manual. We highly recommend taking the time to become familiar with the terms and concepts described here before proceeding further into the manual.

Chapter 2 provides a detailed description of the rear panel connectors, and how the 7825DSK2-LG-HD should be connected into your system.

Chapter 3 describes how to operate the 7825DSK2-LG-HD using *VistaLINK*[®] PRO.

Chapter 4 describes how to operate the 7825DSK2-LG-HD using the Front Panel Controls or Rackmount Remote Control Panel. This chapter also includes information on the Setup Menu system.

Chapter 5 provides an overview of the HTML setup page.

Chapter 6 describes how to control the 7825DSK2-LG-HD using the Desktop Remote Control Panel.

Chapter 7 provides technical information such as the specifications.

Chapter 8 describes how to upgrade the firmware in the 7825DSK2-LG-HD.



Items of special note are indicated with a double box like this.

1.3. DEFINITIONS

4:2:2: The sampling ratio used in the HDTV digital video signal. For every 4 samples of luminance there are 2 samples each of R-Y (Red minus Luminance) and B-Y (Blue minus Luminance).

16x9: A widescreen television format such as HDTV in which the aspect ratio of the screen is 16 units wide by 9 high as opposed to the 4x3 of normal TV.

AES/EBU: (Sometimes abbreviated as AES) Refers to the digital audio standard (AES3-1992) set by the Audio Engineering Society and European Broadcast Union and used by most forms of digital audio from CDs to professional digital video.

Aspect Ratio: The ratio of width to height in a picture. Theatre screens generally have an aspect ratio of 1.85 to 1, widescreen TV (16x9) is 1.77 to 1, and normal TV (4x3) is 1.33 to 1.

CCIR (International Radio Consultative Committee): An international standards committee. (This organization is now known as ITU.)

CCIR-601: See ITU-R601.

Cliff effect: (also referred to as the 'digital cliff') This is a phenomenon found in digital video systems that describes the sudden deterioration of picture quality when due to excessive bit errors, often caused by excessive cable lengths. The digital signal will be perfect even though one of its signal parameters is approaching or passing the specified limits. At a given moment however, the parameter will reach a point where the data can no longer be interpreted correctly, and the picture will be totally unrecognisable.

Component analog: The non-encoded output of a camera, video tape recorder, etc., consisting of the three primary colour signals: red, green, and blue (RGB) that together convey all necessary picture information. In some component video formats these three components have been translated into a luminance signal and two colour difference signals, for example Y, B-Y, R-Y.

Component digital: A digital representation of a component analog signal set, most often Y, B-Y, R-Y. The encoding parameters are specified by ITU-R709 for HDTV signals. SMPTE 274M and SMPTE 296M specify the parallel interface.

Composite analog: An encoded video signal such as NTSC or PAL video that includes horizontal and vertical synchronising information.

Composite digital: A digitally encoded video signal, such as NTSC or PAL video that includes horizontal and vertical synchronising information.

D1: A component digital video recording format that uses data conforming to the ITU-R601 standard. Records on 19 mm magnetic tape. (Often used incorrectly to refer to component digital video.)

D2: A composite digital video recording format that uses data conforming to SMPTE 244M. Records on 19 mm magnetic tape. (Often used incorrectly to refer to composite digital video.)

D3: A composite digital video recording format that uses data conforming to SMPTE 244M. Records on 1/2" magnetic tape.

- D5:** A component digital video recording format that uses data conforming to the ITU-R601 standard. Records on 1/2" magnetic tape.
- Drop frame:** In NTSC systems, where the frame rate is 29.97002618 frames per second, the drop frame mode permits time of day indexing of the frame numbers by dropping certain frame numbers. Specifically frames 0, and 1 at the beginning of each minute except minutes 0,10,20,30,40, & 50, are omitted, to compensate for an approximate timing error of 108 frames (3 seconds 18 frames) per hour. A flag bit is set in the time code to signal when the drop frame mode is in effect.
- DVS/168:** A standard for carrying EAS notifications over TCP/IP. Crawl text (.txt) and sound (.wav) files are copied via FTP, then activated by a notification over a custom TCP/IP port.
- EAS:** Emergency Alert System, a national warning system employed in the U.S.
- EBU (European Broadcasting Union):** An organisation of European broadcasters that among other activities provides technical recommendations for the 625/50 line television systems.
- Embedded audio:** Digital audio is multiplexed onto a serial digital video data stream.
- ITU:** The United Nations regulatory body governing all forms of communications. ITU-R (previously CCIR) regulates the radio frequency spectrum, while ITU-T (previously CCITT) deals with the telecommunications standards.
- ITU-R601:** An international standard for standard definition component digital television from which was derived SMPTE 125M and EBU 3246-E standards. ITU-R601 defines the sampling systems, matrix values and filter characteristics for Y, B-Y, R-Y and RGB component digital television signals.
- Letterbox:** Placing a wide screen image on a conventional TV by placing black bands at the top and bottom of the screen.
- Linear time code:** (Also known as Longitudinal Time Code) A digital code used for timing and control purposes on videotape and associated audio tape machines. It is recorded on a linear track with audio characteristics and is referred to as LTC. Each 80 bit code word is associated with one television frame, and consists of 26 time bits, 6 flag bits, 32 user bits and 16 sync bits. This time code may run at 24, 25 or 30 frames per second depending on the video format. See also SMPTE 12M
- LTC:** See Linear Time Code
- NTSC:** National Television Standards Committee established the television and video standard in use in the United States, Canada, Japan and several other countries. NTSC video consists of 525 horizontal lines at a field rate of approximately 60 fields per second. (Two fields equal one complete Frame). Only 487 of these lines are used for picture. The rest are used for sync or extra information such as VITC and Closed Captioning.
- PAL:** Phase Alternating Line. The television and video standard in use in most of Europe. Consists of 625 horizontal lines at a field rate of 50 fields per second. (Two fields equal one complete Frame). Only 576 of these lines are used for picture. The rest are used for sync or extra information such as VITC and Teletext.

Pixel: The smallest distinguishable and resolvable area in a video image. A single point on the screen. In digital video, a single sample of the picture. Derived from the words *picture element*.

Serial digital: Digital information that is transmitted in serial form. Often used informally to refer to serial digital television signals.

SMPTE (Society of Motion Picture and Television Engineers): A professional organisation that recommends standards for the film and television industries.

SMPTE 12M: The SMPTE standard for Time and address code. SMPTE 12M defines the parameters required for both linear and vertical interval time codes.

SMPTE 125M: The SMPTE standard for bit parallel digital interface for component video signals. SMPTE 125M defines the parameters required to generate and distribute component video signals on a parallel interface.

SMPTE 259M-C: The SMPTE standard for 525 and 625 line serial digital component and composite interfaces.

SMPTE 272M: The SMPTE standard for embedding audio in serial digital standard definition (SMPTE 259M-C) video signals.

SMPTE 274M: The SMPTE standard for bit parallel digital interface for high definition component video signals with an active picture of 1080 lines x 1920 pixels.

SMPTE 276M: The SMPTE standard for transmission of AES/EBU Digital Audio Signals Over Coaxial Cable

SMPTE 292M: The SMPTE standard for high definition serial digital component interfaces.

SMPTE 296M: The SMPTE standard for bit parallel digital interface for high definition component video signals with an active picture of 720 lines x 1280 pixels.

SMPTE 299M: The SMPTE standard for embedding audio in serial digital high definition (SMPTE 292M) video signals.

TRS: Timing reference signals used in composite digital systems. (It is four words long).

TRS-ID: Abbreviation for "Timing Reference Signal Identification". A reference signal used to maintain timing in composite digital systems. (It is four words long.)

This page left intentionally blank

CHAPTER 2

TABLE OF CONTENTS

2. INSTALLATION	2-1
2.1. REAR PANEL OVERVIEW	2-1
2.1.1. Video Connections	2-1
2.1.2. Reference Video Connections	2-2
2.1.3. Serial I/O Connections	2-2
2.1.3.1. Serial Port Pin Out Definitions.....	2-4
2.1.4. GPI/O Connections	2-4
2.1.5. Ethernet Network Connections	2-5
2.2. MOUNTING	2-5
2.3. POWER REQUIREMENTS	2-5
2.4. CONNECTING THE REMOTE CONTROL PANEL	2-5
2.5. CONNECTING THE VIDEO	2-6
2.5.1. Video Inputs	2-6
2.5.2. Video Outputs	2-7
2.5.3. Genlock Reference	2-7
2.6. CONNECTING THE LINEAR TIME CODE	2-7
2.7. CONNECTING TO AN ETHERNET NETWORK.....	2-7
2.8. CONNECTING THE GENERAL PURPOSE INPUTS AND OUTPUTS	2-8
2.9. CONNECTING THE OPTIONAL TEMPERATURE PROBE	2-12
2.10. MODULE CONFIGURATION	2-13
2.11. CONFIGURING THE MODULE USING THE MODULE SERIAL PORT	2-13
2.11.1. Network Configuration	2-14
2.12. HOW TO INCORPORATE A ROUTER.....	2-15
2.12.1. Using a Xenon Router.....	2-15
2.12.2. Using a X1200 Series Router	2-15

Figures

Figure 2-1: 7825DSK2-LG-HD Rear Panel	2-1
Figure 2-2: Keyer GPIO Opto Isolator Circuitry	2-9
Figure 2-3: Powering the General Purpose Input Opto-Isolators from the Unit	2-10
Figure 2-4: Powering the General Purpose Input Opto-Isolators from an External Power Supply	2-10
Figure 2-5: Powering the General Purpose Output Opto-Isolators from the Unit	2-11
Figure 2-6: Powering the General Purpose Output Opto-Isolators from an External Power Supply	2-11
Figure 2-7: HyperTerminal – Main Menu	2-14
Figure 2-8: HyperTerminal – Network Configuration	2-14

Tables

Table 2-1: Remote Panel Port Pin Definitions	2-2
Table 2-2: Serial Port C and D – RS422 Pin Definitions	2-3
Table 2-3: Serial Port Pin Definitions	2-4
Table 2-4: GPI/O Connector Pin Definitions	2-4
Table 2-5: Remote Control Panel Extender Cable	2-6
Table 2-6: Video Input Formats	2-6
Table 2-7: Standard RJ45 Wiring Colour Codes	2-7
Table 2-8: GPIO Maximum Ratings	2-12
Table 2-9: Temperature Probe Extender Cable	2-12

2. INSTALLATION

2.1. REAR PANEL OVERVIEW

Figure 2-1 shows the rear panel of the 7825DSK2-LG-HD module. Sections 2.1.1 to 2.1.5 describe the specific video, audio, and control signals that should be connected to the 7825DSK2-LG-HD rear plate. Sections 2.4 to 2.8 describe how to connect the module into your system.

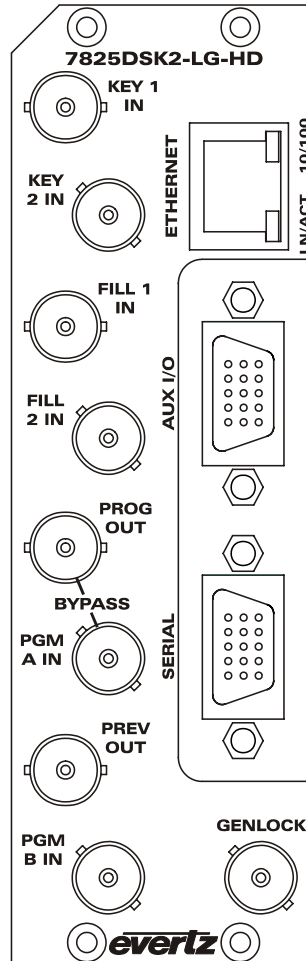


Figure 2-1: 7825DSK2-LG-HD Rear Panel

2.1.1. Video Connections

PGM IN A: This BNC connector is the program input A to the 7825DSK2-LG-HD.

PGM IN B: This BNC connector is the program input B to the 7825DSK2-LG-HD.

FILL IN 1 & 2 and KEY IN 1 & 2: These BNC connectors are the key and fill HD/SD inputs to the 7825DSK2-LG-HD. There are two FILL IN BNC connectors (FILL IN 1 and FILL IN 2) and two KEY IN BNC connectors (KEY IN 1 and KEY IN 2) on the rear plate.

PREV OUT: This output BNC connector is the serial component preview video output from the 7825DSK2-LG-HD. This preview output connector is normally connected to a preview monitor.

PROG OUT: This output BNC connector is the serial component program video output from the 7825DSK2-LG-HD. Connect this output to the next video device in your output path. This output is protected by a bypass relay to the adjacent **PGM IN A** input BNC. When the bypass relay is activated on power loss to the keyer, the **PROG OUT** will be a direct relay connection to the **PGM IN A** input.

2.1.2. Reference Video Connections

GENLOCK: This 75 ohm terminated input is for connecting an analog video reference. Connect the **GENLOCK** connector to the reference input sync. The 7825DSK2-LG-HD can also be set to derive its timing from the input video connected to the **PGM IN A** input using the *REFERENCE* menu.

2.1.3. Serial I/O Connections

A breakout cable (Evertz Part # WP-SERIAL-COM-1-0) is provided with each 7825DSK2-LG-HD. This breakout cable connects to the **SERIAL DB9** (Serial Control) connector on the rear plate. The serial connectors on the breakout cable have the following serial I/O connections.

LTC IN: This female XLR connector is an input for SMPTE/EBU linear time code, which drives the internal clock for the insertion of “Breakfast” clock style logos.

COM B: This 9 pin female D connector provides an RS-422 serial interface for connection to the Remote Control Panel. This port is wired as a SMPTE 207M Tributary as shown in Table 2-1. See section 2.4 for information on connecting the remote control panel.

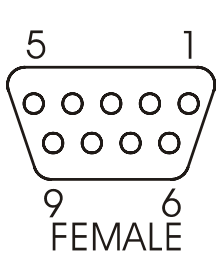
	Pin #	Name	Description
	1	GND	Chassis ground
	2	Tx-	RS-422 Tx-(A) Output
	3	Rx+	RS-422 Rx+(B) Input
	4	GND	
	5		
	6	GND	
	7	Tx+	RS-422 Tx+(B) Output
	8	Rx-	RS-422 Rx-(A) Input
	9	GND	

Table 2-1: Remote Panel Port Pin Definitions

COM C and COM D: These 9 pin female D connectors provide serial interfaces designed for connection to Automation Systems including the Evertz MetaCast 2 software. The ports are also used for optional temperature probe. These ports can be individually changed to run in either RS422 or RS232 mode by reconfiguring jumpers J19 or J20 on the 7700FC card inside the unit. The SERIAL CONTROL C port is controlled with jumper J19 and the COM D port is controlled with jumper J20. When they are set for the RS-232 mode of operation, the ports have the same pinout as Port A. When they are set for the RS-422 mode of operation the ports have the pinout shown in Table 2-2.



The RS-422 pinout for the SERIAL CONTROL and COM D ports is not a standard SMPTE RS422 pinout. You will have to make a custom cable in order to use these ports in the RS422 configuration.

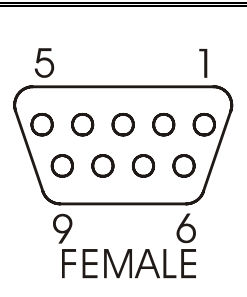
	Pin #	Name	Description
	1	GND	Chassis ground
	2	Tx-	RS-422 Tx-(A) Output
	3	Rx-	RS-422 Rx-(A) Input
	4		
	5	GND	
	6		
	7	Rx+	RS-422 Rx+(B) Input
	8	Tx+	RS-422 Tx+(B) Output
	9	GND	

Table 2-2: Serial Port C and D – RS422 Pin Definitions

The function of each port must be configured using the *Serial Control* and *Com D* menu items on the *GENERAL* menu. (See section 3.5.2 for VLPRO Configuration Settings and section 4.6.8 for Remote Control Configuration Settings).

2.1.3.1. Serial Port Pin Out Definitions

Table 2-3 shows the pin out definitions for the 15 pin serial port on the rear plate.

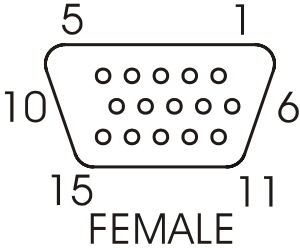
	Pin #	Name	Description
	1	CTS+ Comm Port B	Clear To Send
	2	RTS+ Comm Port B	Request To Send
	3	RXD+ Comm Port B	Receive Data
	4	RTS- Comm Port B	Request To Send
	5	GND	Ground
	6	Tx Comm Port C	Transmit Data
	7	RTS Comm Port C	Request To Send
	8	Rx Comm Port C	Receive Data
	9	CTS Comm Port C	Clear To Send
	10	LTC -	Local Time Code
	11	RTS Comm Port D	Request To Send
	12	Rx Comm Port D	Receive Data
	13	Tx Comm Port D	Transmit Data
	14	CTS Comm Port D	Clear To Send
	15	LTC +	Local Time Code

Table 2-3: Serial Port Pin Definitions

2.1.4. GPI/O Connections

GPI/O: This 15 pin female high density 'D' connector (**AUX I/O**) contains several general-purpose control inputs and outputs. The inputs are used to connect manual or automatic triggers for the display or insertion of media. The outputs provide feedback on internal unit status of the downstream keyer. See section 2.8 for information on connecting the general-purpose inputs and outputs. For information on configuring the GPI and GPO functions, see section 3.8 for VLPRO Configuration and sections 4.11.1 and 4.11.2 for RCP Configuration.

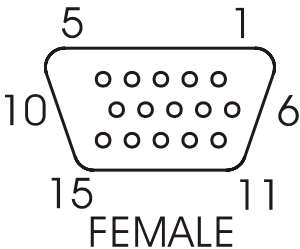
	Pin #	Name	Description
	1	GND	Chassis ground
	2	GPOUT B	General purpose output B
	3	GPOUT A	General purpose output A
	4	GPOUT C	General purpose output C
	5	GPIN C	General Purpose Input C
	6	GPOUT D	General Purpose Output D
	7	GPIN E	General Purpose Input E
	8	GPIN A	General Purpose Input A
	9	GPIN D	General Purpose Input D
	10	+3.3V	Power
	11	GPIN H	General Purpose Input H
	12	GPIN F	General Purpose Input F
	13	GPIN G	General Purpose Input G
	14	GPIN B	General Purpose Input B
	15	VEXT	External Power Supply for the Inputs2

Table 2-4: GPI/O Connector Pin Definitions

2.1.5. Ethernet Network Connections

ETHERNET: This RJ-45 connector is an Ethernet port used for high-speed firmware upgrades and FTP logo transfers. See section 2.7 for information on connecting to an Ethernet network. See section 4.6.5 in the *General* menu descriptions for information on configuring the network addresses for the downstream keyer.

2.2. MOUNTING

The rack mount Remote Control Panel (RCP) is equipped with rack mounting angles and fits into a standard 19 inches by 1.75 inches by 3.75 inches (483 mm x 45 mm x 150mm) rack space. The optional Desktop Remote Control Panel (DCP) is designed to be mounted on a control panel desk and is fitted with rubber feet to keep it from sliding on the desktop.

2.3. POWER REQUIREMENTS

The standard 7825DSK2-LG-HD is a 2 slot card contained within the 7800FR. The 7800FR frame comes standard with one auto-ranging power supply that automatically senses the input voltage over the range of 100 to 240 VAC. An additional power supply (7800PS) can be ordered to provide fully redundant powering of the frame. Power should be applied by connecting a 3-wire grounding type power supply cord to the power entry module on the rear panel of each power supply. The power cord should be minimum 18 AWG wire size; type SVT marked VW-1, maximum 2.5m in length.

The power entry modules contain a standard IEC power inlet connector, two 5 x 20 mm fuse holders and an EMI line filter.



CAUTION – TO REDUCE THE RISK OF ELECTRICAL SHOCK, GROUNDING OF THE GROUND PIN OF THE MAINS PLUG MUST BE MAINTAINED.

2.4. CONNECTING THE REMOTE CONTROL PANEL

The 7825DSK2-LG-HD is available with a rack mountable or desktop remote control panel. The remote control panel is connected to the **SERIAL CONTROL** connector on the Keyer units using COM B of the breakout cable (Evertz Part # WP-SERIAL-COM-1-0), provided. For longer distances, simply make your own cable of the required length according to the diagram in Table 2-5. Communications to the remote panel is through a standard straight-through RS-422 connection, enabling the panel to be located up to 1000 feet from the main electronics unit.



7825DSK2-LG-HD End			Remote Panel End			
	9 pin D Male	Pin	Belden 9729	9 pin D Female	Pin	
		1			1	
	Tx-	2	-----1a-----	Rx-	2	
	Rx+	3	-----2b-----	Tx+	3	
	Rx Gnd	4	---drain 2---	Rx Gnd	4	
		5				
	Tx Gnd	6	---drain 1---	Tx Gnd	6	
	Tx+	7	-----1b-----	Rx+	7	
	Rx-	8	-----2a-----	Tx-	8	
		9			9	
	Frame Gnd	Shield	---drain 1---	Frame Gnd	Shield	

Table 2-5: Remote Control Panel Extender Cable

2.5. CONNECTING THE VIDEO

2.5.1. Video Inputs

The HD or SD program video source should be connected to the **PGM IN A** BNC. If you are using the 7825DSK2-LG-HD as a two input standard definition video keyer, the alternate video source should be connected to the **PGM IN B** BNC. If you are using a downstream key source for the downstream keyer, the Key video should be connected to a **KEY 1 IN** or **KEY 2 IN** BNC and the fill should be connected to the corresponding **FILL 1 IN** or **FILL 2 IN** BNC. The 7825DSK2-LG-HD supports HD or SD digital video in the formats shown in Table 2-6. The video standard must be set manually to match the incoming video type (see section 3.2.1 for VLPRO Configuration and section 4.6.1 for RCP Configuration).

Common Name	Pixels / Active Lines	Frame Rate	Progressive /Interlace	Standard	Valid Genlock Types
525i/59.94	720 x 486	29.97 (30/1.001)	I	SMPTE 125M	NTSC
16x9 525i	720 x 486	29.97	I	SMPTE 125M	NTSC
625i/50	720 x 576	25	I	EBU TECH 3267-E	PAL
720p/50	1280 x 720	25	P	SMPTE 296M	PAL
720p/59.94	1280 x 720	59.94 (60/1.001)	P	SMPTE 296M	NTSC
1080i/50	1920 x 1080	25	I	SMPTE 274M	PAL
1080i/59.94	1920 x 1080	29.97 (30/1.001)	I	SMPTE 274M	NTSC

Table 2-6: Video Input Formats

2.5.2. Video Outputs

The **PROG OUT** output contains the video output from the Program Bus and should be connected to the main broadcast chain of your facility. The **PROG OUT** output is protected by a bypass relay. When the relay is active, the **PROG OUT** output is directly connected to the **PGM IN A** input.

The **PREV OUT** output contains the video output from the preview and will normally be connected to a HD/SD monitor to allow you to view the program output before it goes on air. When the bypass relay is active, the **PREV OUT** output will not have any video on it.

2.5.3. Genlock Reference

For proper switching of the video and audio signals an analog video genlock reference must be supplied. Connect a composite analog NTSC or PAL colour black video signal to the GENLOCK connector. Make sure that the signal type is correct for the video standard in use. (See Table 2-6)

2.6. CONNECTING THE LINEAR TIME CODE

The 7825DSK2-LG-HD has a linear time code (LTC) input used to provide time information for the analog or digital clock logos. Connect the LTC output from your house master time code source to the LTC IN XLR connector. When using an unbalanced input to the reader, the signal should be applied to pin 3 of the reader input connector. Normally, the unused input (pin 2) should be connected to ground (pin 1).

2.7. CONNECTING TO AN ETHERNET NETWORK

The 7825DSK2-LG-HD is designed to be used with either 10Base-T (10 Mbps) or 100Base-TX (100 Mbps) also known as *Fast Ethernet*, twisted pair Ethernet cabling systems. When connecting for 10Base-T systems, category 3, 4, or 5 UTP cable as well as EIA/TIA – 568 100Ω STP cable may be used. When connecting for 100Base-TX systems, category 5 UTP cable is required. The cable must be “straight through” with a RJ-45 connector at each end. Create a network connection by plugging one end of the cable into the RJ-45 receptacle of the 7825DSK2-LG-HD and the other end into a port of the supporting network device.

The straight-through RJ-45 cable can be purchased or can be constructed using the pinout information in Table 2-7. A colour code wiring table is provided in Table 2-7 for the current RJ 45 standards (AT&T 258A or EIA/TIA 258B colour coding shown). Also refer to the notes following the table for additional wiring guide information.


	Pin #	Signal	EIA/TIA 568A	AT&T 258A or EIA/TIA 568B	10BaseT or 100BaseT
	1	Transmit +	White/Green	White/Orange	X
	2	Transmit –	Green/White or White	Orange/White or Orange	X
	3	Receive +	White/Orange	White/Green	X
	4	N/A	Blue/White or Blue	Blue/White or Blue	Not used (required)
	5	N/A	White/Blue	White/Blue	Not used (required)
	6	Receive –	Orange/White or Orange	Green/White or Green	X
	7	N/A	White/Brown	White/Brown	Not used (required)
	8	N/A	Brown/White or Brown	Brown/White or Brown	Not used (required)

Table 2-7: Standard RJ45 Wiring Colour Codes

Note the following cabling information for this wiring guide:

- Only two pairs of wires are used in the 8-pin RJ 45 connector to carry Ethernet signals.
- Even though pins 4, 5, 7 and 8 are not used, it is mandatory that they be present in the cable.
- 10BaseT and 100BaseT use the same pins; a crossover cable made for one will also work with the other.
- Pairs may be solid colours and not have a stripe.
- Category 5 cable must use Category 5 rated connectors.

The maximum cable run between the downstream keyer and the supporting hub is 300 ft (90 m). The maximum combined cable run between any two end points (i.e. downstream keyer and PC/laptop via network hub) is 675 feet (205 m).

Devices on the Ethernet network continually monitor the receive data path for activity as a means of checking that the link is working correctly. When the network is idle, the devices also send a link test signal to one another to verify link integrity. The downstream keyer rear panel is fitted with two LEDs to monitor the Ethernet connection.

10/100: This LED is ON when a 100Base-TX link is last detected. The LED is OFF when a 10Base-T link is last detected. Upon power-up the LED is OFF as the last detected rate is not known and therefore defaults to the 10Base-T state until rate detection is completed.

LN/ACT: This dual purpose Green LED indicates that the 7825DSK2-LG-HD has established a valid linkage to its hub, and it determines whether the 7825DSK2-LG-HD is sending or receiving data. This LED will be ON when the 7825DSK2-LG-HD has established a good link to its supporting hub. This gives you a good indication that the segment is wired correctly. The LED will BLINK when the 7825DSK2-LG-HD is sending or receiving data. The LED will be OFF if there is no valid connection.

2.8. CONNECTING THE GENERAL PURPOSE INPUTS AND OUTPUTS

Figure 2-2 shows a simplified schematic diagram of the GPIO circuitry. The user can connect GP+3.3V supplied from the keyer unit into the Vext pin to provide power to the GPIO opto-isolator circuitry. In this configuration the user can activate GPIs simply by connecting the GPI input pins to Ground (see Figure 2-3). This can be done with a button, switch, relay or an open collector transistor. In this configuration the GPOs will be internally pulled up to 3.3 volts (see Figure 2-5). 3.3 volts is available to the user to be used for driving external circuitry. Care must be taken to limit the load to 0.5W ensuring that there is no affect on the power supply source on the unit.



Warning: Do not connect GP+3.3V from one unit to another unit's GP+3.3V output.

Alternately, the user can connect an external power source for the opto-isolator circuitry. The Vext voltage must be greater than the voltage supplied to GPI by at least 3v. Figure 2-4 and Figure 2-6 show how to wire the GPIs and GPOs from an external power supply.

The tally outputs are active low with an internal pull up (10k Ohm) resistor to the Vext pin. When active, the output will go low and is able to sink up to 10mA. When inactive, the signal will go high (to the voltage applied to the Vext pin). Do not attempt to source more than 100µA from the output.

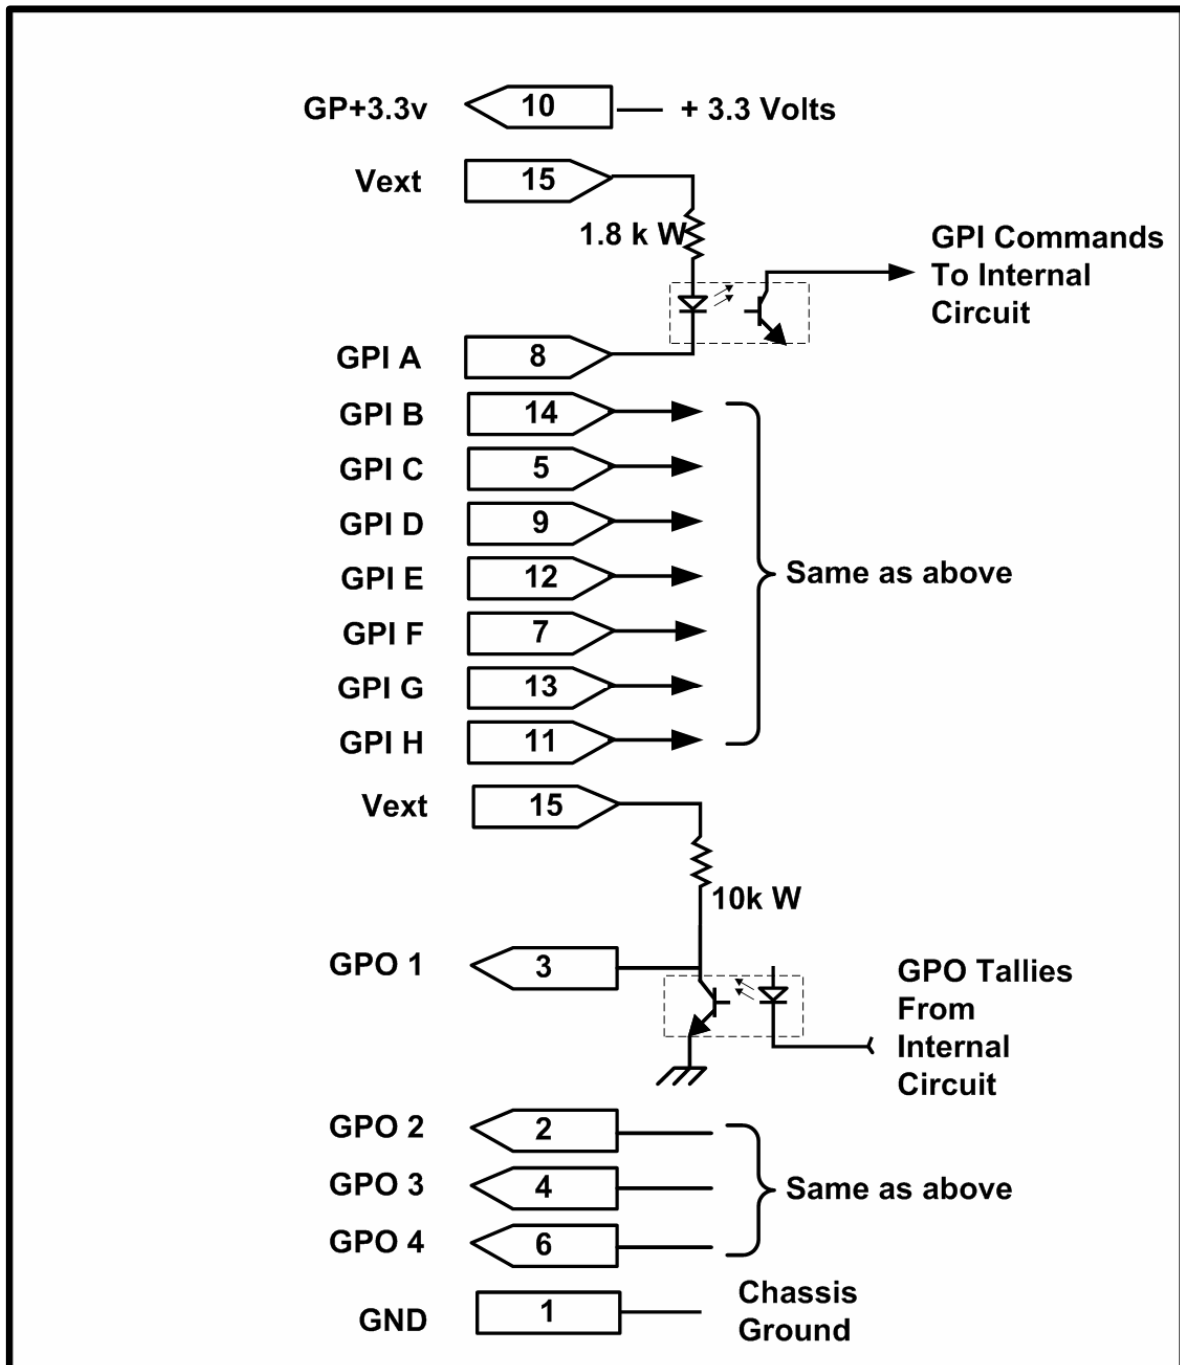


Figure 2-2: Keyer GPIO Opto Isolator Circuitry

All GPI inputs are level triggered. Lowering the GPI input to a potential below Vext will select the allocated preset definition. The 8 GPIs (A through H) are dedicated as load logo controls. When one of these GPI inputs is activated, the corresponding logo is loaded into active video. If multiple inputs are active both commands are ignored until a single input is recognized.

The GPI to logo allocation is programmable using the *GPI Setup* menu item on the *PRESET* menu. (See section 4.11.5). See section 3.12 of the Preset Control Window for VLPRO Configuration Settings.

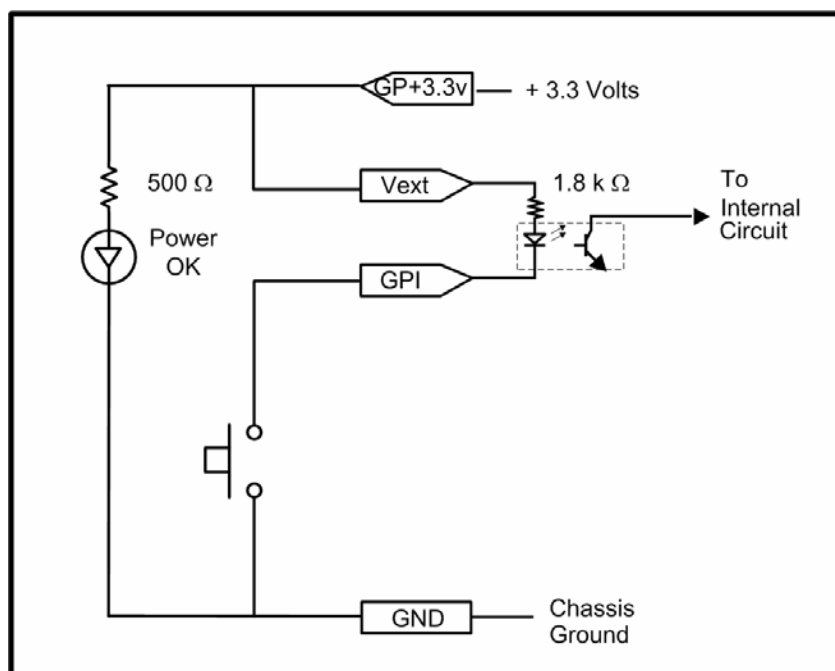


Figure 2-3: Powering the General Purpose Input Opto-Isolators from the Unit

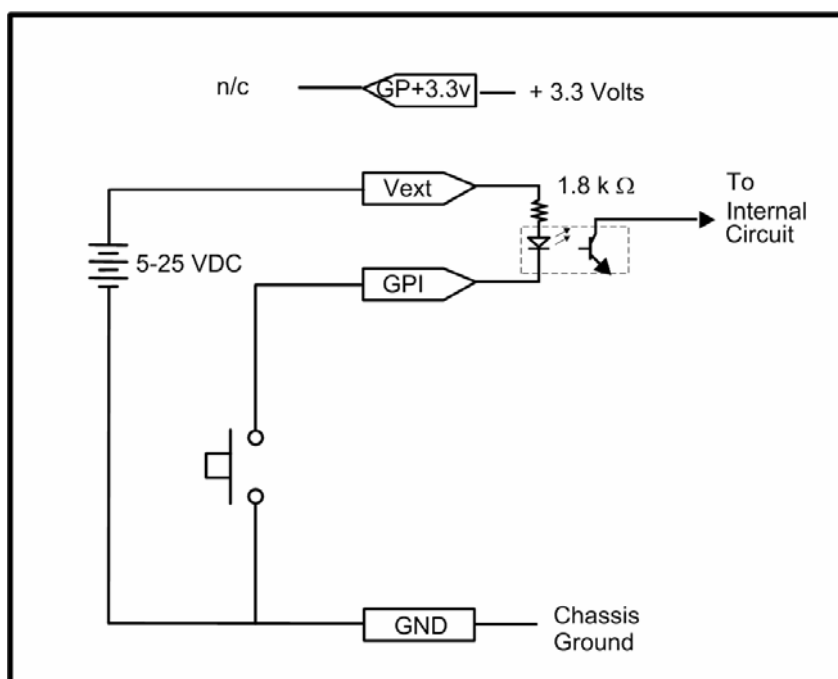


Figure 2-4: Powering the General Purpose Input Opto-Isolators from an External Power Supply

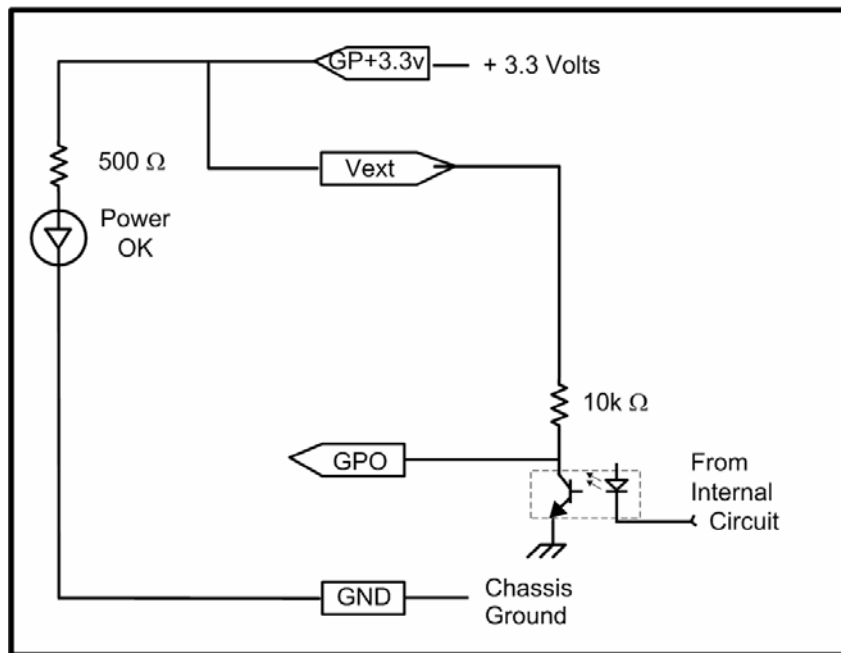


Figure 2-5: Powering the General Purpose Output Opto-Isolators from the Unit

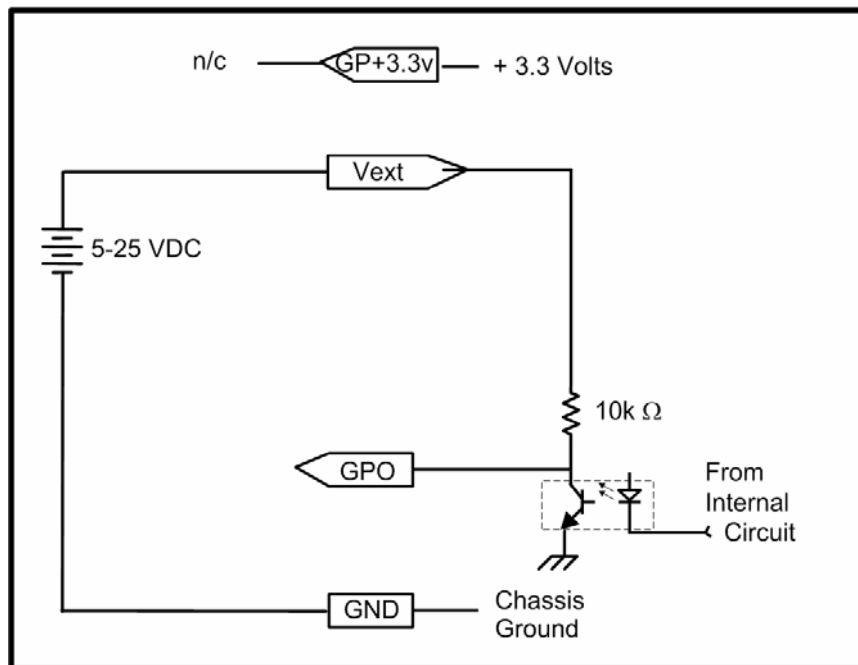


Figure 2-6: Powering the General Purpose Output Opto-Isolators from an External Power Supply

Table 2-8 shows the maximum limits that the user must adhere to so that no circuitry is damaged.

Description	Name	Value
Maximum GP+3.3V current load	I _{GP+3.3V} max	100 mA
Minimum input voltage for a high	V _{gpi} high min	3 V
Maximum input voltage for a low	V _{gpi} low max	0.8 V
Maximum GPO sink current	I _{gpo} max	25 mA

Table 2-8: GPIO Maximum Ratings

2.9. CONNECTING THE OPTIONAL TEMPERATURE PROBE

The 7825DSK2-LG-HD is available with an optional temperature probe that is used to input data for display in a temperature logo. Consult the temperature probe manual for information on installing the temperature probe. Connect the temperature probe power adapter to the probe unit. Connect the temperature probe to the **COM D** or **COM C** connector on the 7825DSK2-LG-HD. The temperature probe ships with an adapter cable to convert its RJ-45 connector to a standard 9 pin D connector. The RJ-45 plugs into the temperature probe. You will need to create a straight-through 9 pin male to female cable of the desired length according to the diagram in Table 2-5 to connect the probe to the 7825DSK2-LG-HD. The serial port on the 7825DSK2-LG-HD must be set for RS-232 operation as described in section 2.1.3.



The temperature probe cable should not exceed 1000 feet.



7825DSK2-LG-HD End				Temperature Probe End		
	9 pin D Male	Pin	Belden 9729	9 pin D Female	Pin	
		1			1	
	TxD	2	-----1a-----	RxD	2	
	RxD	3	-----1b-----	TxD	3	
		4		Rx Gnd	4	
	Gnd	5	---drain 1---	Gnd		
		6			6	
		7			7	
		8			8	
		9			9	
	Frame Gnd	Shield	---drain 2---	Frame Gnd	Shield	

Table 2-9: Temperature Probe Extender Cable

In order for the temperature probe to communicate to the 7825DSK2-LG-HD you must configure the **COM C** or **COM D** port for the correct protocol and baud rate. The *SERIAL CONTROL* or *COM D* menu items on the *General* menu are used to accomplish this (depending on which communications port is used for the temperature probe). Set the RCP *General* menu item to *temperature* in order for the temperature probe to communicate to the 7825DSK2-LG-HD. See section 4.6.8 for information on setting the serial port protocol.

2.10. MODULE CONFIGURATION

The 7825DSK2-LG-HD module's features and parameters are configured through the following tools:

Module Serial Port: Module IP address network identification.

Remote Control Panel or Desktop Control Panel: Use external control panels (via serial port) to configure (see section 4 for further details)

VistaLINK® PRO: An SNMP software tool that is used to configure the module's parameters for normal operation.

Web Server Interface: A web browser can be used to connect to the 7825DSK2-LG-HD to configure some of the audio and time parameters. This interface does not require any additional software to be installed, just web browser software.

Overture: Allows the user to manage and control the media on the 7825DSK2-LG-HD.

2.11. CONFIGURING THE MODULE USING THE MODULE SERIAL PORT

- 1) Through the card edge's serial port, and using the serial 7700 upgrade cable connected to a PC's serial port running HyperTerminal (or equivalent), the 7825DSK2-LG-HD module's IP address and subnet are identified. The 7700 upgrade cable supplied with the 7800FR frame is a multi-coloured ribbon cable with a six pin header socket on one end and a female 9 pin D connector on the other end (Evertz part number WA-S76). This cable is normally in the vinyl pouch at the front of the manual binder. Configure the port settings of the terminal program as follows:

Baud	57600
Parity	no
Data bits	8
Stop bits	2
Flow Control	None

- 2) When the card is powered-up, the HyperTerminal connection displays boot-up status information and once completed, ends with the "Status Message" as shown in Figure 2-7.
- 3) Press the <Enter> key to see the main Menu. In the Main Menu, the options shown in Figure 2-7 are present for module configuration.

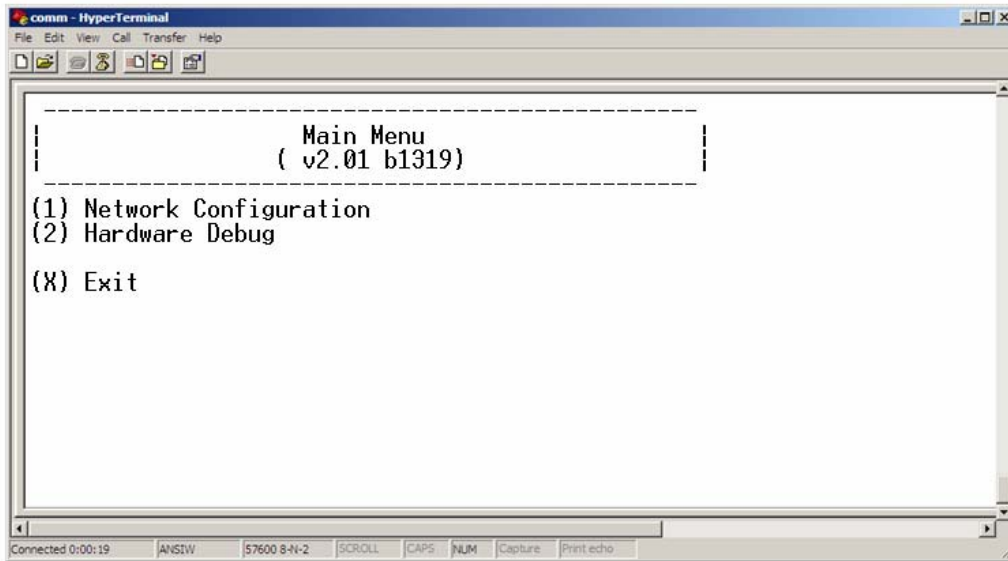


Figure 2-7: HyperTerminal – Main Menu

2.11.1. Network Configuration

- 4) To open a menu item, type the corresponding number from the list, and then press <ENTER>. Select option (1) *Network Configuration* from the Main Menu to set the IP parameters for the 7825DSK2-LG-HD module.

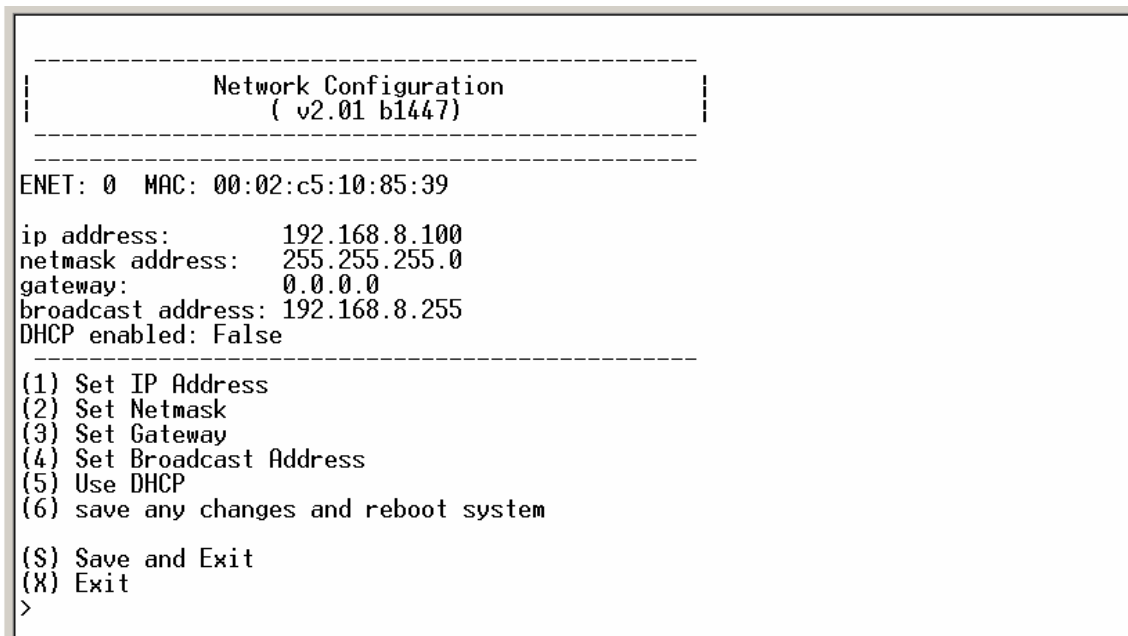


Figure 2-8: HyperTerminal – Network Configuration

- 5) In the Network Configuration menu item, type the corresponding number from the list, and then press <ENTER>. **Remember to SAVE (S or 6) when a change has been made before exiting the menu.** In the above menu (Figure 2-8), selecting options (1) through (4) allows the user to set the networking parameters of the 7825DSK2-LG-HD.
- 6) Once changes are completed and saved, the 7825DSK2-LG-HD module should be power-cycled for the changes to take effect. Once networked, further configuration is performed using VLPro or the RCP.

2.12. HOW TO INCORPORATE A ROUTER

The 7825DSK2-LG-HD has the ability to control an upstream router. This control is done serially using either GVG Ten XL or Quartz Router control protocols. Details on the specific routers can be found in their individual manuals.

2.12.1. Using a Xenon Router

The 7825DSK2-LG-HD can control a Xenon router (or other Quartz router) using the Quartz Router control protocol. In conjunction with a QMC-DCP, users can router ANY input source to the PGM IN A, PGM IN B, FILL IN 1 & 2 and KEY IN 1 & 2. The communication between the Xenon and 7825DSK2-LG-HD is done over a serial cable.

If multiple 7825DSK2-LG-HDs are to be connected to a single Xenon router, then a 7700R-SC will be required to bridge the serial connections to the single router. Please call the factory for more information on this configuration.

2.12.2. Using a X1200 Series Router

The 7825DSK2-LG-HD can control X1200 series router using the GVG Ten XL protocol. In conjunction with a QMC-DCP, users can router ANY input source to the PGM IN A, PGM IN B, FILL IN 1 & 2, and KEY IN 1 & 2. The communication between the X1200 series router and 7825DSK2-LG-HD is done over a serial cable.

This page left intentionally blank

CHAPTER 3

TABLE OF CONTENTS

3. HOW TO OPERATE THE DOWNSTREAM KEYER USING VISTALINK® PRO.....	3-1
3.1. WHAT IS VISTALINK®?	3-1
3.2. VIDEO TAB	3-2
3.2.1. Video Standard	3-2
3.2.2. Reference Type	3-3
3.2.3. Horizontal Output Offset	3-3
3.2.4. Vertical Output Offset.....	3-3
3.2.5. Video Mandatory Input.....	3-3
3.3. TIME TAB.....	3-4
3.3.1. Displaying Real Time Clock	3-5
3.3.2. Displaying the Universal Time Clock Time	3-5
3.3.3. Displaying the Local Time	3-5
3.3.4. Displaying the Local Date	3-5
3.3.5. Displaying the Universal Date	3-5
3.3.6. Displaying the Real Time Date	3-5
3.3.7. Enabling Daylight Saving Time Compensation	3-6
3.3.8. Selecting Whether the Time Code Input is UTC or Local Time	3-6
3.3.9. Setting the LTC Date Format	3-6
3.3.10. LTC Presence Detection Enabled.....	3-6
3.3.11. Synchronizing the Real Time Clock to the UTC Time.....	3-7
3.3.12. Setting the Time Zone Offset	3-7
3.3.13. Up Down Timer	3-7
3.3.13.1. Setting the Up Down Timer	3-7
3.4. NETWORK TAB.....	3-8
3.4.1. Network IP Address	3-8
3.4.2. Sub Net Mask	3-8
3.4.3. Gateway	3-8
3.4.4. MAC Address	3-9
3.5. GENERAL TAB.....	3-9
3.5.1. Firmware Version	3-9
3.5.1.1. Monitoring the Build Number.....	3-9
3.5.1.2. Enabling Reboot.....	3-9
3.5.2. Port Entry	3-9
3.5.3. General	3-11
3.5.3.1. Automation Debug and M2100 Debug Functions	3-11
3.5.4. Controls.....	3-11
3.5.4.1. Monitoring the Genlock Status	3-11
3.5.4.2. Setting the Router Enable	3-11
3.5.4.3. Configuring the Router Select	3-11
3.5.5. MCP Controls.....	3-12
3.6. DSK TAB.....	3-12
3.6.1.1. Setting the Key Type	3-13
3.6.1.2. Setting the Key Gain	3-13

3.6.1.3. Setting the Key Offset	3-13
3.6.1.4. Setting the Key Threshold	3-13
3.6.1.5. Setting the Auto Key Enable	3-13
3.7. MATTE TAB	3-14
3.7.1. Matte Parameters	3-14
3.7.1.1. Setting the Matte Enable Function	3-14
3.7.2. Setting a User Defined Matte Aspect Ratio	3-14
3.7.2.1. Setting the Matte Top	3-14
3.7.2.2. Setting the Matte Bottom	3-14
3.7.3. Setting the Matte Aspect Ratio	3-15
3.8. GPI/GPO CONTROL TAB	3-15
3.8.1. Configuring the GPO Outputs	3-16
3.8.2. Configuring the GPI Inputs	3-17
3.8.2.1. Target Logo	3-17
3.8.2.2. Configuring the Perform Transition Function	3-17
3.8.2.3. Configuring the Load Preset Function	3-17
3.8.2.4. Configuring the Action	3-18
3.8.2.5. Configuring the Logo Function	3-18
3.9. TEMPERATURE TAB	3-19
3.9.1. Setting the Temperature Format	3-19
3.9.2. Setting the Temperature Source	3-19
3.9.3. Setting the Static Temperature	3-20
3.9.4. Temperature Read Loss	3-20
3.10. TRANSITION TAB	3-20
3.10.1. Setting the Transition Type	3-20
3.10.2. Setting the Transition Rate	3-21
3.10.3. Setting the Transition Swap Mode	3-21
3.10.4. Pausing a Transition	3-22
3.10.5. Setting Program Bus Change	3-22
3.11. EAS TAB	3-22
3.11.1. EAS over TCP/IP	3-22
3.11.1.1. Setting the EAS Vertical Position	3-23
3.11.1.2. Setting the EAS Font	3-23
3.11.1.3. Setting the EAS Height	3-23
3.11.1.4. Setting the EAS Rate	3-23
3.11.2. EAS Colour Settings	3-23
3.12. PRESETS TAB	3-24
3.13. MEDIA TAB	3-25
3.13.1. General Control	3-25
3.13.1.1. Setting the Control Bypass	3-25
3.13.2. Preview Channel	3-26
3.13.2.1. Setting the Video Input	3-26
3.13.2.2. Setting the DSK Layer	3-26
3.13.2.3. Setting the Logo Layer	3-26
3.13.2.4. Setting the DSK 2 Layer	3-26
3.13.3. Program Control	3-26
3.13.3.1. Setting the Video Input	3-26
3.13.3.2. Setting the DSK Layer	3-26

3.13.3.3. Setting the Logo Layer	3-26
3.13.3.4. Setting the DSK Layer 2	3-26
3.13.4. Voice Over Control	3-27
3.13.5. Transition Control	3-27
3.13.6. Command Status	3-27
3.13.7. Media All Out	3-28
3.13.8. Static Logo Configuration Settings	3-28
3.13.8.1. Setting the Logo Horizontal Position	3-28
3.13.8.2. Setting the Logo Vertical Position	3-28
3.13.8.3. Setting the Logo Transparency (Gain)	3-29
3.13.8.4. Setting the Logo Fade In Duration	3-29
3.13.8.5. Setting the Logo Display Time (Hold)	3-29
3.13.8.6. Setting the Logo Fade Out Duration	3-29
3.13.8.7. Setting the Up Down Timer	3-29
3.13.9. Crawl Logo Configuration Settings	3-29
3.13.9.1. Setting the Crawl Logo Horizontal Position	3-30
3.13.9.2. Setting the Crawl Logo Vertical Position	3-30
3.13.9.3. Setting the Crawl Logo Transparency (Gain)	3-30
3.13.9.4. Setting the Crawl Logo Fade In Duration	3-30
3.13.9.5. Setting the Crawl Logo Display Time (Hold)	3-31
3.13.9.6. Setting the Crawl Logo Fade Out Duration	3-31
3.13.9.7. Setting the Up Down Timer	3-31
3.13.9.8. Setting the Crawl Rate	3-31
3.13.9.9. Setting the Crawl Repeats Count	3-31
3.13.9.10. Setting the Crawl Pause Frequency	3-31
3.13.9.11. Setting the Crawl BG Opacity	3-31
3.13.9.12. Setting the Font Height	3-32
3.13.9.13. Setting the Font Name	3-32
3.13.10. Setting the Crawl Logo Colours	3-32
3.13.10.1. Setting the Crawl Outline Opacity	3-32
3.13.10.2. Setting the Logo Layer	3-32
3.13.10.3. Logo Quick In/Fade Out Effect	3-33
3.13.11. Selecting a Logo or Media Item and Issuing a Fade/Cue/Fade Out	3-33
3.13.12. Audio Clip Configuration Settings	3-34
3.13.13. Setting the Audio Clip Repeat Count	3-34

Figures

Figure 3-1: Video Window	3-2
Figure 3-2: Video Mandatory Input Parameters	3-4
Figure 3-3: Time Window	3-4
Figure 3-4: Network Window	3-8
Figure 3-5: General Window.....	3-9
Figure 3-6: DSK Window	3-12
Figure 3-7: Matte Window	3-14
Figure 3-8: GPI/GPO Control Window	3-15
Figure 3-9: Temperature Window.....	3-19
Figure 3-10: Transition Window	3-20
Figure 3-11: Wipe Pattern Angles	3-21
Figure 3-12: EAS Window	3-22
Figure 3-13: Presets Window	3-24
Figure 3-14: Media Window.....	3-25
Figure 3-15: Voice Over Control Options	3-27
Figure 3-16: Static Logo Configuration Settings	3-28
Figure 3-17: Crawl Logo Configuration Settings	3-30
Figure 3-18: "Choose a Colour" Dialog Box.....	3-32
Figure 3-19: Issuing a Fade/Cue/Fade Out.....	3-33
Figure 3-20: Command Status Table	3-33
Figure 3-21: Audio Clip Configuration Settings	3-34

3. HOW TO OPERATE THE DOWNSTREAM KEYER USING VISTALINK® PRO

3.1. WHAT IS *VistaLINK*®?

VistaLINK® is Evertz's remote monitoring and configuration platform which operates over an Ethernet network using Simple Network Management Protocol (SNMP). SNMP is a standard computer network protocol that enables different devices sharing the same network to communicate with each other. *VistaLINK*® provides centralized alarm management, which monitors, reports, and logs all incoming alarm events and dispatches alerts to all the VLPro Clients connected to the server. Card configuration through *VistaLINK*® PRO can be performed on an individual or multi-card basis using simple copy and paste routines, which reduces the time to configure each module separately. Finally, *VistaLINK*® enables the user to configure devices in the network from a central station and receive feedback that the configuration has been carried out.

There are 3 components of SNMP:

1. An SNMP manager, also known as a Network Management System (NMS), is a computer running special software that communicates with the devices in the network. Evertz *VistaLINK*® Pro Manager graphical user interface (GUI), third party or custom manager software may be used to monitor and control Evertz *VistaLINK*® enabled fiber optic products.
2. Managed devices (such as 7825DSK2-LG-HD), each with a unique address (OID), communicate with the NMS through an SNMP Agent. Evertz *VistaLINK*® enabled 7800 series modules reside in the 3RU 7800FR MultiFrame and communicate with the manager via the 7700FC *VistaLINK*® frame controller module, which serves as the Agent.
3. A virtual database, known as the Management Information Base (MIB), lists all the variables being monitored, which both the Manager and Agent understand. Please contact Evertz for further information about obtaining a copy of the MIB for interfacing to a third party Manager/NMS.

For more information on connecting and configuring the *VistaLINK*® network, see the 7700FC Frame Controller chapter.

3.2. VIDEO TAB

The *Video* tab enables the user to set the parameters for the video connections.

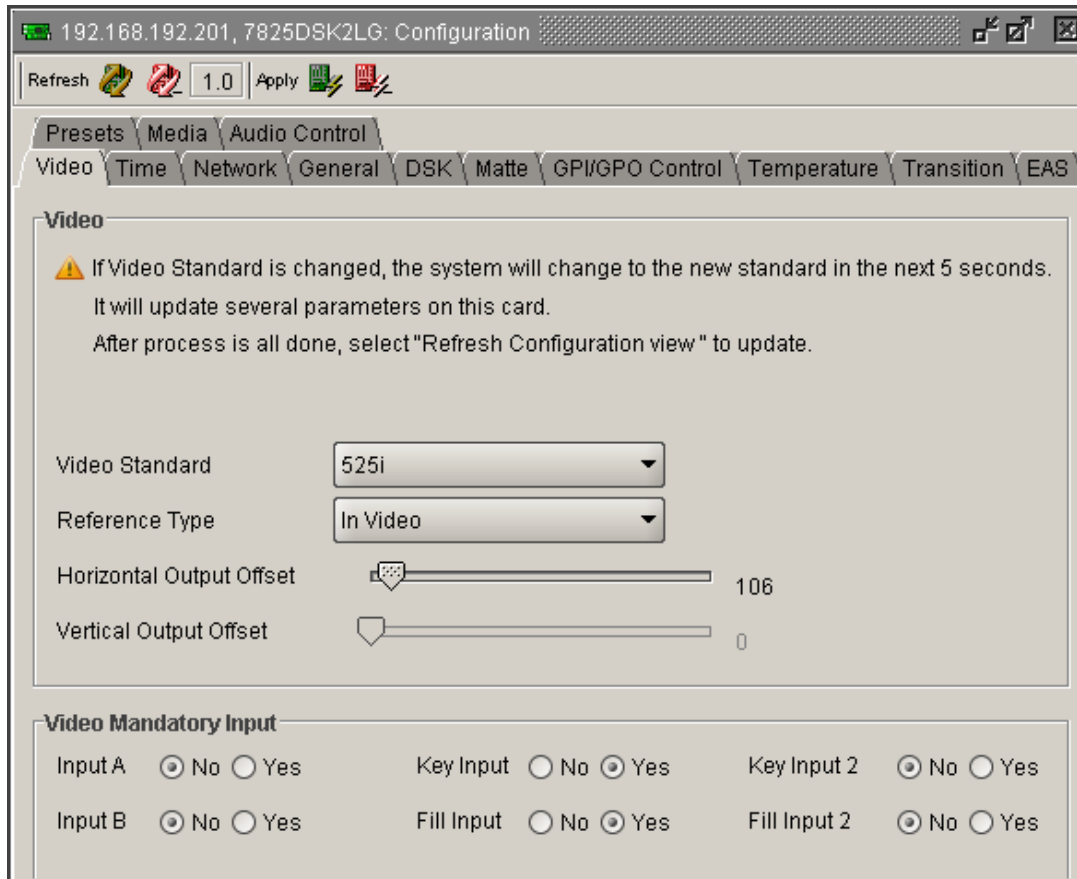


Figure 3-1: Video Window

3.2.1. Video Standard

This option is used to set the video standard in use. Use the *Video Standard* drop down menu to select the desired video standard. The following video standard options are available.

- 525i/59.94:** Select *525i/59.94* for operation with 4 x 3 aspect ratio 525i/59.94 video conforming to SMPTE 125M.
- 16x9 525i:** Select *16x9 525i* for operation with 16 x 9 aspect ratio 525i video conforming to SMPTE 125M.
- 625i/50:** Select *625i/50* for operation with 4 x 3 aspect ratio 625i/50 video conforming to EBU TECH 3267-E.
- 720p/50:** Select *720p/50* for operation with 720p/50 video conforming to SMPTE 296M.
- 720p/59.94:** Select *720p/59.94* for operation with 720p/59.94 video conforming to SMPTE 296M.

1080i/50: Select *1080i/50* for operation with 1080i/50 video conforming to SMPTE 274M.

1080i/59.94: Select *1080i/59.94* for operation with 1080i/59.94 video conforming to SMPTE 274M.

3.2.2. Reference Type

This option allows the user to set the reference type (*In Video*, *In Genlock*, *Genlock Frame 1*, or *Genlock Frame 2*). The downstream keyer can be referenced by the input video or by the source applied to the **GENLOCK** BNC.

Selecting Genlock Frame 1 or Genlock Frame 2 sets the frame genlock reference mode 1 or 2 respectively.

Frame genlock is where the genlock signal is connected to the 7800 frame and run through the backplane to each board that is plugged in. It has the same function as the genlock input, but it requires only one connector per frame rather than one per card. There are two connectors on the 7800 frame for a choice of two genlock inputs. Therefore, the user can choose either *In Video* (use input video signal's frame sync), *In Genlock* (backplate), *Frame Genlock 1* or *Frame Genlock 2*.

3.2.3. Horizontal Output Offset

This option allows the user to set the horizontal timing of the output video with respect to the genlock reference input. Setting this control to 0 keeps the output video in time with the genlock reference.

Increasing the value will delay the output video in one-sample increments. In order to advance the horizontal timing of the output video with respect to the genlock video, set the control to the maximum number of samples per line for the output video standard minus the number of samples that you wish to advance the output video. (i.e. for 1080i/59.94 output video the total number of samples per line is 2200, so to advance the output video 5 samples set the value to 2195.)

3.2.4. Vertical Output Offset

This option allows the user to set the vertical timing of the output video with respect to the genlock reference input. Setting this control to 0 keeps the output video in time with the genlock reference.

Increasing the value will delay the output video in one-line increments. In order to advance the vertical timing of the output video with respect to the genlock video, set the control to the maximum number of samples per line for the output video standard minus the number of samples that you wish to advance the output video. (i.e. for 1080i/59.94 output video the total number of samples per line is 2200, so to advance the output video 5 samples set the value to 2195.)



The *H and V Phase Offset* adjustment is a REAL TIME ADJUSTMENT and will affect the output video timing immediately. These settings should not be adjusted when the output video is in the broadcast chain.

3.2.5. Video Mandatory Input

The *Video Mandatory Input* parameter enables the user to mute the output video.

Video Mandatory Input			
Input A	<input checked="" type="radio"/> No <input type="radio"/> Yes	Key Input	<input type="radio"/> No <input checked="" type="radio"/> Yes
Input B	<input checked="" type="radio"/> No <input type="radio"/> Yes	Fill Input	<input type="radio"/> No <input checked="" type="radio"/> Yes
		Key Input 2	<input checked="" type="radio"/> No <input type="radio"/> Yes
		Fill Input 2	<input checked="" type="radio"/> No <input type="radio"/> Yes

Figure 3-2: Video Mandatory Input Parameters

When an input is set to Yes, the output video will become muted if the input becomes invalid or is absent, regardless of whether or not that input is currently selected to be routed to the output.

3.3. TIME TAB

The *Time* tab enables the user to set the time settings for the 7825DSK2-LG-HD.

192.168.192.192, 7825DSK2LG: Configuration

Refresh 1.0 Apply

Presets Media Audio Control

Video Time Network General DSK Matte GPI/GPO Control Temperature Transition EAS

Time

Real Time Clock RTC 3:31:25

Universal Time Clock UTC 3:31:23

Local Time LOCAL 3:31:23

Local Date LDate 2/17/2056

Universal Date UDate 2/17/2056

Real Date RDate 2/17/2056

Daylight Saving Time Off

LTC Time Zone Utc

LTC Date Encode Auto

Jam RTC From UTC

LTC Presence Detection Enabled Yes

Zone Time Difference +00:00:00

NOTE - Proper Format for Zone Time Difference: -hh:mm:ss or +hh:mm:ss

Time zone difference limits are -11:59:59 to +11:59:59

Up/Down Timer

	Hours	Minutes	Seconds	Direction
Timer 1	0	1	0	Down
Timer 2	0	1	0	Down

Figure 3-3: Time Window

3.3.1. Displaying Real Time Clock

The 7825DSK2-LG-HD contains a real time clock that is used to drive the clock display logos that can be placed on the screen. This battery backed up real time clock (known as RTC) free runs on an internal oscillator and can be set from the front panel. When the 7825DSK2-LG-HD is powered up with a valid video input, a separate clock (known as the UTC) is initialized from the RTC and maintains Universal Coordinated time (UTC) accurately from the video input so that it will not drift. The 7825DSK2-LG-HD automatically updates the RTC clock from the UTC clock to minimize long term time drift. In order to keep the UTC clock in sync with your house master time code it should also be locked to incoming linear time code connected to the LTC IN connector. The UTC clock time is internally maintained as Universal Coordinated Time (UTC) but can also be adjusted for time zone offsets from UTC and for daylight saving time, and displayed as local time (Local).

3.3.2. Displaying the Universal Time Clock Time

This option is used to display the UTC time clock. The time displays are always shown in the 24 hour time format.

3.3.3. Displaying the Local Time

This option is used to display the clock time as local time. (UTC time adjusted for the time zone offset and DST adjustment). The time displays are always shown in the 24 hour time format.

3.3.4. Displaying the Local Date

This option is used to display the local date which is the UTC date adjusted by the time zone in yy:mm:dd format.



When there is a valid LTC input to the 7825DSK2-LG-HD, the LTC time will overwrite the Real Time clock that has been entered.

3.3.5. Displaying the Universal Date

This option is used to display the UTC date in yy:mm:dd format.

3.3.6. Displaying the Real Time Date

This option is used to display and set the real time date in the keyer.



When there is a valid LTC input to the keyer with the date encoded in the user bits, the LTC date will overwrite the Real Time date that has been entered.

3.3.7. Enabling Daylight Saving Time Compensation

This option item allows the user to control whether Daylight Saving Time (DST) compensation will be applied to derive the local time.

When set to *off*, Daylight Saving Time compensation will not be applied.

When set to *on*, Daylight Saving Time compensation will be applied and the local time will be adjusted back by 1 hour.



The 7825DSK2-LG-HD must be manually changed from Daylight Saving time to Standard time using this menu setting. If you want to automatically keep the time clock in the 7825DSK2-LG-HD in sync with the correct local time, connect a source of linear time code that contains local time to the LTC IN connector.

3.3.8. Selecting Whether the Time Code Input is UTC or Local Time

This option allows the user to select whether incoming time code will be in UTC or local time. This information is necessary to correctly update the RTC clock from the time code.

Select *Local*, when the incoming LTC is local time.

Select *UTC*, when the incoming LTC is Universal Coordinated time.

3.3.9. Setting the LTC Date Format

This option is used to select the format of the date encoded in the user bits of the LTC. Use the drop down menu to choose from the Date Formats.

The **LTC DATA ENCODE** drop down menu lists the following options:

- AUTO
- SKOTEL
- SMPTE MJD
- SMPTE BCD
- Production
- Legacy
- None

For Skotel time code generators, choose *Skotel*. For all other time code generators choose *Auto*.

3.3.10. LTC Presence Detection Enabled

The *LTC Presence Detection Enabled* parameter is modifiable. It allows the user enable or disable the reading of the LTC Input. The user can tell the system to ignore the LTC Input, which may be necessary to avoid false readings due to floating input signals.

3.3.11. Synchronizing the Real Time Clock to the UTC Time

The hardware real time clock (RTC) will drift slightly from the video rate UTC Clock time under normal operation. When this drift exceeds 5 seconds the RTC will be automatically resynchronized to the UTC time. This option allows the user to synchronize the RTC to the UTC Clock time immediately.



Note: In order to enable this option, the *Jam RTC* from the *UTC* option must be selected.

3.3.12. Setting the Time Zone Offset

This option allows the user to set a time zone offset between the UTC time and the Local time. This time zone offset will be added to the UTC time along with the Daylight Saving time correction to obtain the Local time. Time zones are normally in one hour or 30 minute increments and can be + or – from UTC. (Time zones east of Greenwich are +, and time zones west of Greenwich are -)

3.3.13. Up Down Timer

3.3.13.1. Setting the Up Down Timer

This item lets you configure the behaviour of Timer 1 and Timer 2. Clock logos can be configured to use these timers for countdowns or visible timing references. Once configured, timers are activated by GPI or playlist scripts.

HOURS: This item sets the hours for the timer. It can be set to values from 0 to 23 hours.

MINUTES: Sets the minutes for the timer. It can be set to values from 0 to 59 minutes.

SECONDS: This menu item sets the seconds for the timer. It can be set to values from 0 to 59 seconds.

DIRECTION: This item sets the direction for the Timer.

3.4. NETWORK TAB

The *Network* tab enables the user to view the network settings.



None of the network settings can be changed with *VistaLINK*® Pro. The network settings can be changed either in the serial menu or the Remote Control Panel menu.

The screenshot shows a configuration window titled "192.168.192.192, 7825DSK2LG: Configuration". It features a toolbar with "Refresh", "Apply", and "1.0" buttons. Below the toolbar are tabs for "Presets", "Media", "Audio Control", "Video", "Time", "Network", "General", "DSK", "Matte", "GPI/GPO Control", "Temperature", "Transition", and "EAS". The "Network" tab is selected, displaying the following settings:

Network IP Address (0 to 255)	192.168.192.192
Subnet Mask (0 to 255)	255.255.255. 0
Gateway (0 to 255)	0. 0. 0. 0
MAC Address	0:2:C5:10:C6:9B

NOTE:
Please note that changing the Network IP address will cause Keyer to reboot in 45 seconds!

Figure 3-4: Network Window

3.4.1. Network IP Address

This option displays the unique IP address of the 7825DSK2-LG-HD within the network. 192.168.1.XXX is an example of an IP address in a private (internal) network.

3.4.2. Sub Net Mask

This option displays the "subnet mask" of the network. Specifically, this parameter outlines all the IP addresses that can communicate with the 7825DSK2-LG-HD.

3.4.3. Gateway


This option identifies the IP address of the "gateway" (commonly referred to as the "firewall").

3.4.4. MAC Address

This item displays the Network hardware (MAC) address of the unit (which can not be changed).

3.5. GENERAL TAB

The *General* tab enables the user to configure the port, firmware, AFD and MCP controls for the 7825DSK2-LG-HD.

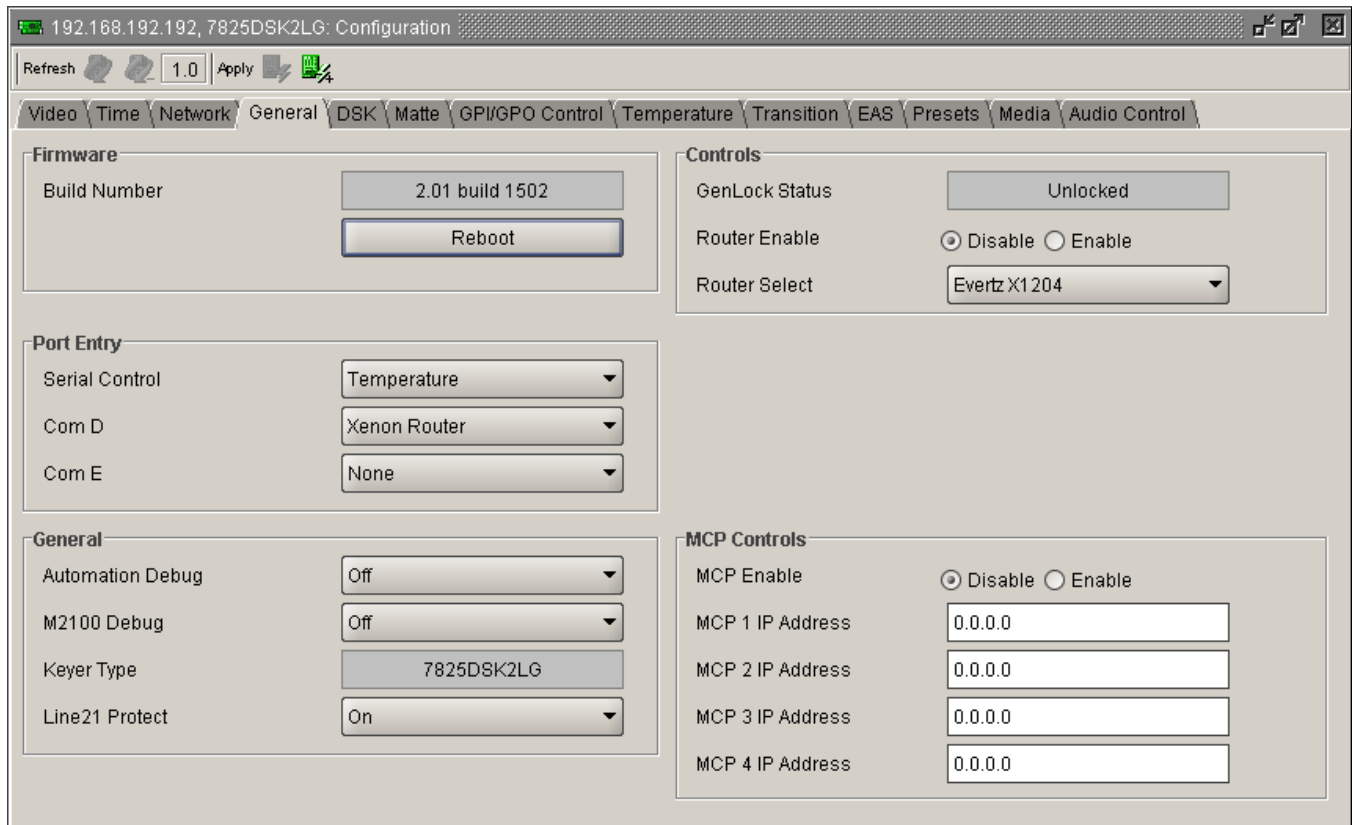

The screenshot shows the 'General' tab of the 7825DSK2LG Configuration window. The window title is '192.168.192.192, 7825DSK2LG: Configuration'. The interface includes a toolbar with 'Refresh', '1.0', and 'Apply' buttons. The 'General' tab is selected, showing several configuration sections:

- Firmware:** Build Number (2.01 build 1502) and a Reboot button.
- Port Entry:** Serial Control (Temperature), Com D (Xenon Router), and Com E (None).
- General:** Automation Debug (Off), M2100 Debug (Off), Keyer Type (7825DSK2LG), and Line21 Protect (On).
- Controls:** GenLock Status (Unlocked), Router Enable (Disable selected), and Router Select (Evertz X1204).
- MCP Controls:** MCP Enable (Disable selected) and four MCP IP Address fields (all 0.0.0.0).

Figure 3-5: General Window

3.5.1. Firmware Version

3.5.1.1. Monitoring the Build Number

The **Build Number** parameter provides the user with the build number.

3.5.1.2. Enabling Reboot

The reboot button allows the user to reboot the unit. Once selected, a message will appear in order to confirm whether the user would like to proceed with the reboot.

3.5.2. Port Entry

The menu items for Serial Control, COM D, and COM E are the same. For simplicity, only the COM D menu items will be shown in the manual. The following items are available in the drop down menu.

Serial Control: Configures the function of the SERIAL CONTROL (COM C) Port.

- COM D:** This option allows you to set the communications protocol that will be used on COM Port D. Select *None* to disable the use of COM Port D.
- COM E:** Configures the function of the virtual serial port (COM E). Select *None* to disable the use of COM Port D. Use a serial to Ethernet converter to access COM Port E through the card's Ethernet connection



NOTE: The COM E option is provided to add more connections. You can convert your serial device to Ethernet and talk to the card that way.

The menu items for *Serial Control*, *COM D*, and *COM E* are the same. For simplicity, only the COM D menu items will be shown in the manual. The following items are available in the drop down menu:

Select *Temperature* when you have the optional temperature probe connected to the port. See section 2.9 for more information about connecting the temperature probe. The temperature is displayed using a preformatted Temperature logo, which is created using Overture™ software. See the Overture™ manual for information on creating the Temperature logo.

Select *Control Panel* when you want to enable the RCP (in addition to VLPro based access; this is generally not necessary if you are using VLPro to configure the card). Plug the breakout cable marked COM PORT B to the back of the RCP.

Select *Console* to view the system console output.

There are three settings that are used when the 7825DSK2-LG-HD is under automation control. See your automation vendor for information about the protocols that are supported.

Select *Automation* when you want to control the 7825DSK2-LG-HD using the Evertz automation protocol. This is the setting you should use when you are controlling the 7825DSK2-LG-HD from the Evertz MetaCast 2 software.

Select *M2100-AUTO* when you want to control the 7825DSK2-LG-HD using the Grass Valley M2100 7825DSK2-LG-HD automation protocol.

Select *XY-AUTO* when you want to control the 7825DSK2-LG-HD using the xy logo inserter automation protocol. Note that only logo functions of the 7825DSK2-LG-HD can be controlled using the xy automation protocol.

Select *Xenon Router* when you want to control the 7825DSK2-LG-HD while using the Xenon Router.

Select the *Ten XL Control* when you want to control the 7825DSK2-LG-HD using a router.

3.5.3. General

3.5.3.1. Automation Debug and M2100 Debug Functions

Two automation debug functions are provided in the *GENERAL* window. One is for the Evertz automation protocol and is called *Automation Debug*. The other is for the M2100 automation protocol and is called *M2100 Auto Debug*. Both work in essentially the same way. When you turn on one of the automation debug functions, the data packets being received from the automation system are output to the Upgrade RS-232 serial port. To view the data, use a terminal program with the following settings: baud rate: 57600, data bits: 8, parity: none, stop bits: 2, flow control: none.

These functions are used to view the commands that are being sent by the automation system. If you are having problems with a unit that is being controlled from automation, Evertz service personnel may ask you to provide a capture of the data being output on the serial port when the debug function is turned on.

Automation Debug: Select *Automation Debug* when you want to control the 7825DSK2-LG-HD using the Evertz automation protocol. This setting should be used when you are controlling the 7825DSK2-LG-HD from the Evertz MetaCast 2 software.

M2100 Debug: Select *M2100 Debug* when you want to control the 7825DSK2-LG-HD using the Grass Valley M2100 7825DSK2-LG-HD automation protocol.

Keyer Type: This field the current product model number. (ie. 7825DSKLG))

Line 21 Protect: This menu item allows the user to control whether logos can be placed on line 21, where closed captions are located in North American television systems. When the video standard is set to one of the 625 line standards, the setting of this menu item is ignored.

When set to *off*, logos can be placed vertically beginning at line 21.

When set to *on*, logos can be placed vertically beginning at line 22, preserving any closed caption information that is encoded on line 21.

3.5.4. Controls

3.5.4.1. Monitoring the Genlock Status

This **Genlock Status** field displays the status of the keyer in regards to genlock. The status will indicate whether the keyer is locked to reference or not.

3.5.4.2. Setting the Router Enable

The **Router Enable** option allows the user to enable or disable the router controls.

3.5.4.3. Configuring the Router Select

The **Router Select** option allows the user to select the desired router type.

3.5.5. MCP Controls

In order for a QMC-DCP to control a 7825DSK2, the 7825DSK2 must contact the QMC-DCP first. The *MCP Controls* fields enable you to configure the IP address of up to four QMC-DCP panels. Once configured the QMC-DCP should allow the user to select and control the 7825DSK2.



Please refer to the QMC-DCP manual for configuration of communications to the 7825DSK2-LG-HD. In the QMC-DCP manual, configuration to control a PKG9625SW and a 7825DSK2-LG-HD are equivalent.

3.6. DSK TAB

The 7825DSK2-LG-HD has a downstream keyer layer that allows the user to key objects into the output video. The *DSK Setup* window is used to configure the downstream keyer functions – key type, gain, and thresholds.

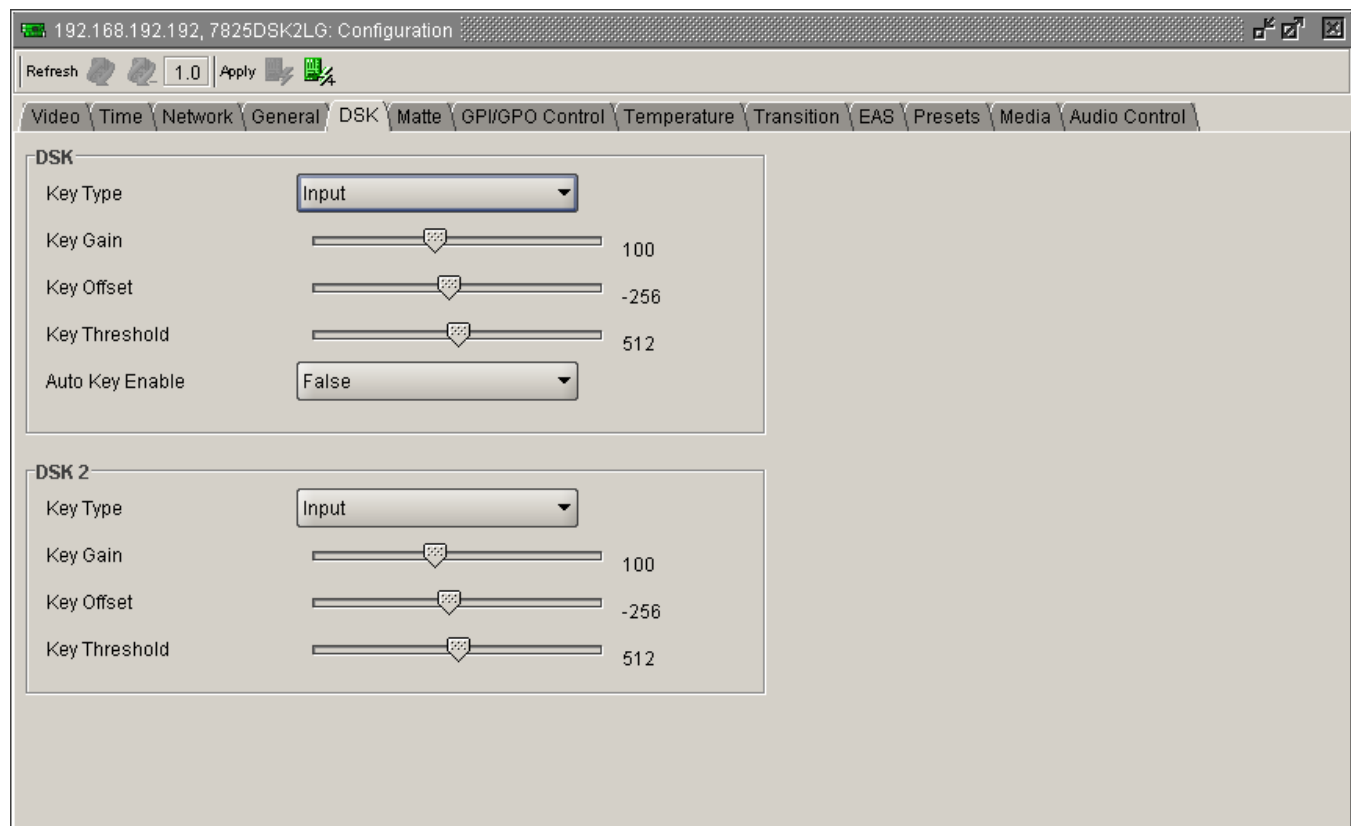


Figure 3-6: DSK Window

The DSK tab has two parts: DSK and DSK 2. Both of these items have the same parameters; therefore, the descriptions below apply to both DSK parts.

3.6.1.1. Setting the Key Type

This option is used to select whether the downstream keyer will use the key and fill input to perform the keying function or whether it will perform a self-key.

Select *input* to use the key and fill inputs provided on the **KEY** and **FILL** video inputs of the 7825DSK2-LG-HD respectively.

Select *self* to perform a hard self-key of the **FILL** video input using the **FILL** luminance threshold value set in the *Key Threshold* menu item.

3.6.1.2. Setting the Key Gain

This option is used to modify the opacity (transparency) of the keyed object used in *input* key mode.

The default *Key Gain* value of 100 will leave the transparency of the keyed object unmodified from that defined by the key signal. Lowering the *Key Gain* value will reduce the opacity of the keyed object (i.e. make it more transparent). Increasing the *Key Gain* value will increase the opacity of the keyed object (i.e. make it less transparent).

3.6.1.3. Setting the Key Offset

This option is used to modify the key offset value used in *input* key mode. This value is the level that will be considered as black on the key input, and should not normally be changed from its default value of 0.

3.6.1.4. Setting the Key Threshold

This option is used to modify the threshold value used in *Self Key* mode. The *Self Key* is a hard key based on the luminance value of the fill signal applied to the **FILL** video input. All luminance values that are above the *Key Threshold* will be keyed from the Fill signal. All values from the key that fall below the *Key Threshold* will be keyed from the background video.

The default value for the *Key Threshold* is 4, which is black.

3.6.1.5. Setting the Auto Key Enable

Some automation systems do not create a distinction between the Media layer (used for keying logos) and the Downstream Keyer layers. This control is provided to prevent the automation from turning the Media layer on and off at the same time as the DSK layers. Verify the functionality of your automation system before changing this menu item.

3.7. MATTE TAB

The 7825DSK2-LG-HD has a black overlay matte that blacks out video and produces a letterbox effect on the output video. The *MATTE Setup* window is used to configure the black overlay matte that can be applied over the program video.

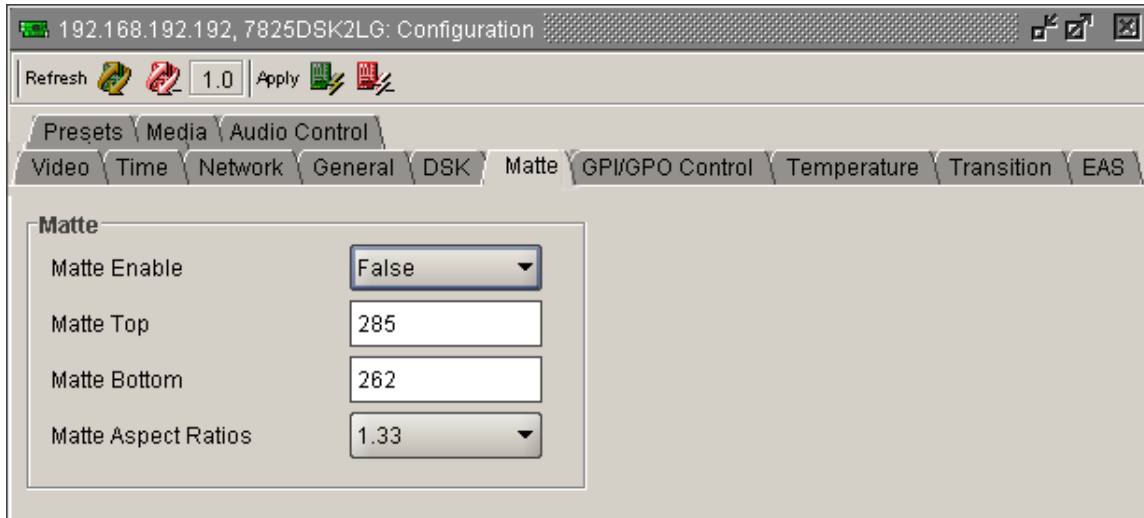


Figure 3-7: Matte Window

3.7.1. Matte Parameters

3.7.1.1. Setting the Matte Enable Function

This option is used to turn the matte on and off.

Select *True* to turn on the black matte overlay. This matte is on the top layer of the keyer and will overwrite all the video on the respective lines of the active picture. The matte does not blank the lines in the vertical interval.

Select *False* to turn off the black matte overlay.

3.7.2. Setting a User Defined Matte Aspect Ratio

There are two options that allow the user to define custom aspect ratios for the matte. Selecting a pre-defined aspect ratios will lose any changes you have made to the *Matte Top* and *Matte Bottom* options unless they are stored using the user presets (see section 3.12). When you manually change the *Matte Top* and *Matte Bottom* settings the *Matte Aspect* will show the aspect ratio as *(user)*.

3.7.2.1. Setting the Matte Top

The Matte Top parameter is used to set the bottom line of the *Top* matte.

3.7.2.2. Setting the Matte Bottom

The Matte Top parameter is used to set the top line of the *Bottom* matte.

3.7.3. Setting the Matte Aspect Ratio


This option is used to set the aspect ratio of the matte.

There are three pre-defined aspect ratios available. When you select one of these aspect ratios the 7825DSK2-LG-HD will automatically set the *Matte Top* and *Matte Bottom* menu items.

In addition you can set a user defined aspect ratio by manually changing the *Matte Top* and *Matte Bottom* menu items. (See section 3.7.2)

3.8. GPI/GPO CONTROL TAB

The *GPI/GPO Control* enables the user to configure the General Purpose Inputs and Outputs.

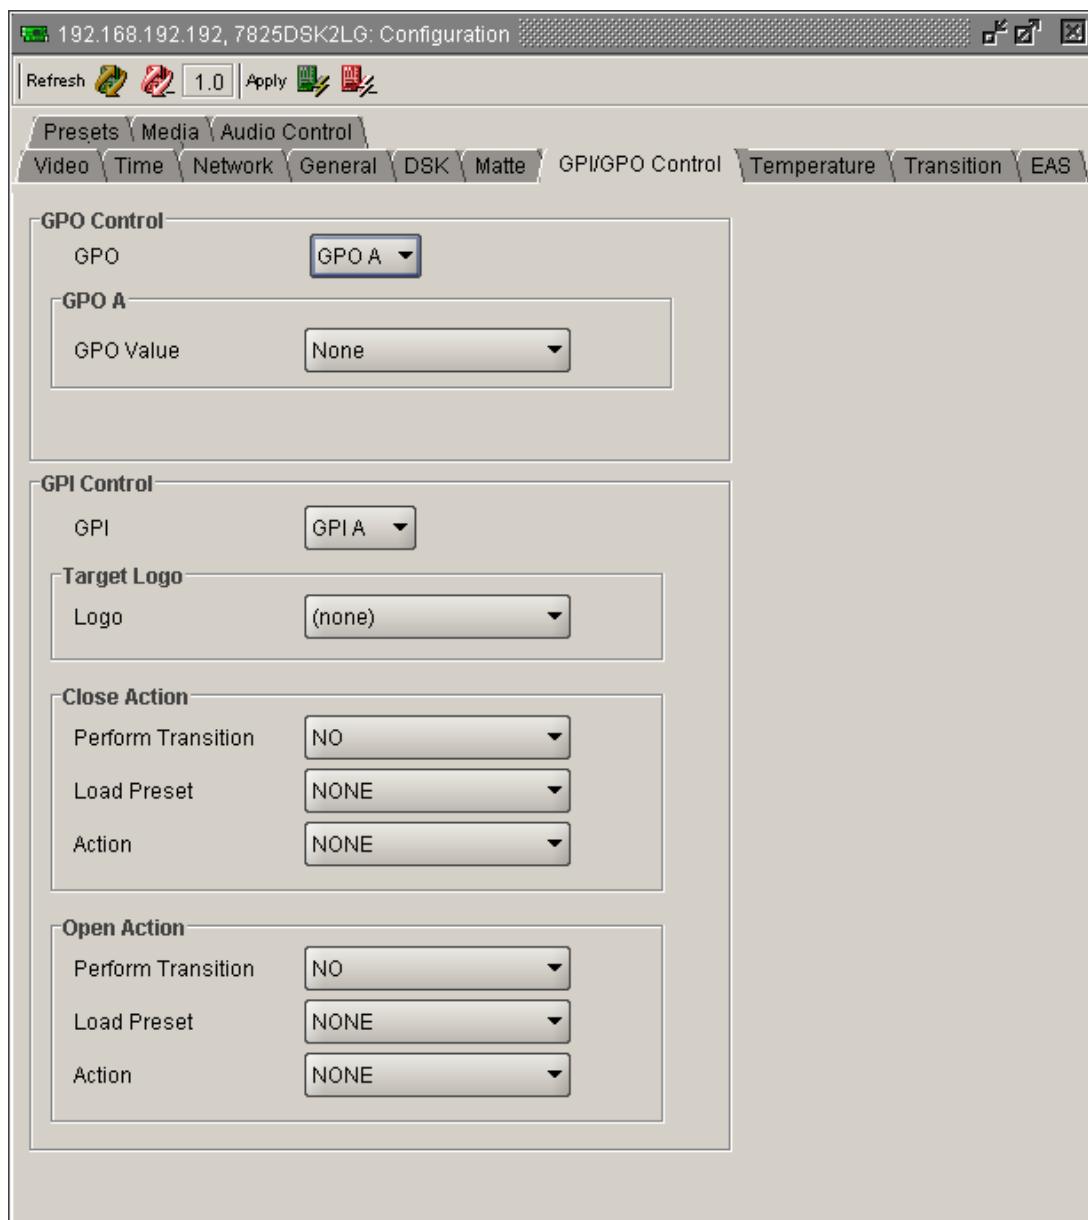

192.168.192.192, 7825DSK2LG: Configuration

Refresh Apply 1.0

Presets Media Audio Control

Video Time Network General DSK Matte GPI/GPO Control Temperature Transition EAS

GPO Control

GPO GPO A

GPO A

GPO Value None

GPI Control

GPI GPI A

Target Logo

Logo (none)

Close Action

Perform Transition NO

Load Preset NONE

Action NONE

Open Action

Perform Transition NO

Load Preset NONE

Action NONE

Figure 3-8: GPI/GPO Control Window

3.8.1. Configuring the GPO Outputs

The 7825DSK2-LG-HD is fitted with four contact closure general-purpose outputs (GPOs) that can be used as tallies for various functions. There are individual menu items to configure each of the GPOs. For simplicity, only the menu for GPO A will be discussed.

The **GPO VALUE** is used to select the function of the GPO A general-purpose output. The output will be low when it is active.

None: Select *none* to disable the output.

Bypass: Select *Bypass* to indicate the unit is running bypass mode.

Transition Status: Select *Transition Status* to indicate the transitions.

Video A- C Val: Select *Video A- C Val* to indicate that the signal is present and valid.

Video A - C Inv: Select *Video A - C Inv* to indicate that the signal is not present.

Voice Over: Select *Voice Over* to activate the output when the voiceover on the program output bus is active.

Media and Logo Status: Select *Media and Logo Status* to make the GPO low when the media layer is turned on and a logo is being keyed on the Program bus.

Media Status: Select *Media Status* to make the GPO low when the media layer is turned on for the Program bus.

Logo Status: Select *Logo Status* to activate the output when the media key layer on the program output bus is active.

DSK Status: Select *DSK Status* to activate the output when the DSK layers on the program output bus is active.

Program Black: Select *Program Black* to activate the output when the program output bus input is the internal black generator.

Program B: Select *Program B* to activate the output when the program output bus input is **PGM IN B**.

Program A: Select *Program A* to activate the output when the program output bus input is **PGM IN A**.

3.8.2. Configuring the GPI Inputs

The 7825DSK2-LG-HD is fitted with 8 general purpose inputs (GPIs) that can be configured to trigger 2 different actions - *On Closure* and *On Open*. For example, the *On Closure* event can be used to load a preset and perform a transition to the Program Bus. The *On Open* event for the same GPI can be used to load a different user preset and perform a transition to the Program Bus. For each event you can configure a preset to load, transition to perform and logo to display.

GPI can also be configured using GPI script files, which are text-based files that can be programmed in a text editor and sent to your unit by Overture™. The syntax is important as the script represents programming code that will be executed when the allocated GPI trigger event occurs. There are 8 GPI inputs. Each input has 2 events: close and open. You can program scripts for each of these 16 events. If a script file is present on the flash file system then the unit will process the script when the event is triggered. If the script file is not present when a GPI event is triggered, then the internal GPI menu settings will be used. The internal GPI settings can reference media, and actions can be configured to cause media to be brought in or out when the GPI is triggered. Note: GPI scripts referred to above are distinct from playlist scripts. Playlist scripts can be configured in the Playlist Editor. For the purposes of GPI configuration, a playlist script is considered to be a logo – you can associate a GPI action with a playlist script explicitly in the GPI configuration menu (again, providing there is no gpi script file present to override the GPI configuration).

The GPI script files are text files therefore they can be easily edited in notepad. They must be named correctly in order to trigger. For example, a script named `gpi_3_close` would run when the third GPI is closed. The full syntax and naming is documented in section 5 and section 10 Appendix A.

GPI CONTROL: This option is used to select one of the GPI inputs (A to H) that will be configured using the other menu items in the *GPI SETUP* menu branch.

The Open action section enables the user to configure the GPI Actions. There are 4 options that configure the actions when the selected GPI closes (*CTransition*, *CLoad*, *CAction*, and *CLogo*). There are also 4 options that configure the actions when the selected GPI opens (*OTransition*, *OLoad*, *OAction*, and *OLogo*). For the sake of brevity in the manual, only the *On Close* event options will be shown.

3.8.2.1. Target Logo

The *Target Logo* drop down menu displays a list of logos available on the unit. The user can select a target logo from this list.

3.8.2.2. Configuring the Perform Transition Function

The **Perform Transition** option is used to select whether a transition will occur when the GPI is closed to ground. The following items are available in the drop down menu:

NO: If you do **not** want to perform a transition when the GPI is closed, select the *NO* item.

YES: Select *YES* to perform a transition when the GPI is closed.

3.8.2.3. Configuring the Load Preset Function

The **Load Preset** option is used to select the preset that will be loaded when the GPI input is closed to ground. The following items are available in the drop down menu:

NONE: If you do **not** want to load a user preset when the GPI is closed, select the *NONE* item. If *NONE* is selected then the existing settings will be used.

1 to 10: Select *1* to *10* to load a specific user preset when the GPI is closed.

3.8.2.4. Configuring the Action

The **Action** option is used to select the action that will occur when the GPI input is closed to ground. The following items are available in the drop down menu:

NONE: If you do not wish to perform any action, select *NONE*.

CUE: Select *CUE* to load the logo selected by the *CLogo* menu item into memory. The logo will not be displayed by this action.

IN: Select *IN* to load the logo selected by the *CLogo* menu item into memory and fade it in.

OUT: Select *OUT* to fade out the logo selected by the *CLogo* menu item.

TOGGLE: Select *TOGGLE* when the GPI is closed.

DUCK IN: Select *DUCK IN* to begin a 'Duck Audio Insert'.

DUCK OUT: Select *DUCK OUT* to end a 'Duck Audio Insert'.

DUCK: Select *DUCK* to toggle the state of the 'Duck Audio Insert'. If a 'Duck Audio Insert' is in effect it will be stopped or if a 'Duck Audio Insert' is not in effect it will be started. This function is useful if you want to use a momentary contact closure as opposed to a maintained contact closure to trigger a voice-over, but the disadvantage is that the current state of the voice-over is not guaranteed.

ALL OUT: Select *ALL OUT* to fade out all logos.

TIMER1 or TIMER2: Select *TIMER1* or *TIMER2* to initiate a count up or count down function for a time logo.

3.8.2.5. Configuring the Logo Function

The **Logo** option is used to select a logo to be acted on if the "Closed Action" item is set to *CUE*, *IN* or *OUT*.

NONE: Select *NONE* to disable any logo actions.

3.9. TEMPERATURE TAB

The 7825DSK2-LG-HD has the ability to insert a logo that displays the current local temperature. The *Temperature* setup window is used to configure parameters relating to these types of logos.

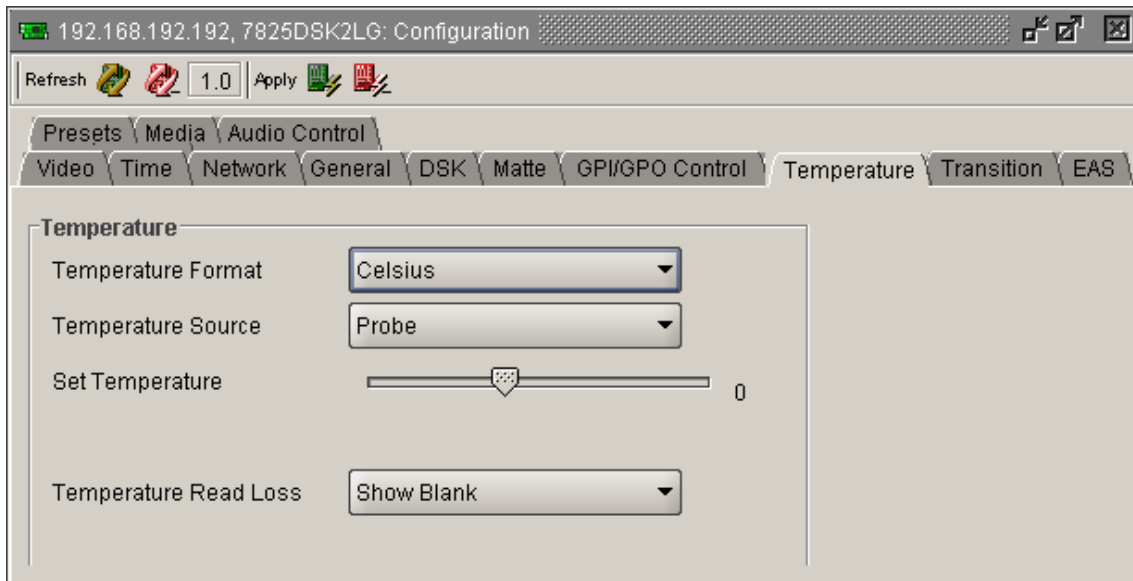


Figure 3-9: Temperature Window

3.9.1. Setting the Temperature Format

This option is used to configure the format of the temperature as set by the *Set Temperature* menu item. Using the Temperature Format menu, the user can select the following options from the drop down menu:

Fahrenheit: Select *Fahrenheit* if the temperature entered is in degrees Fahrenheit.

Celsius: Select *Celsius* if the temperature entered is in degrees Celsius.



Note: This option is only used when the *Temperature Source* option is set to "Manual." When you create a temperature logo, you select the format as well. If, for example, you have created a temperature logo that is formatted for Celsius and you manually set the temperature in degrees Fahrenheit, the 7825DSK2-LG-HD will automatically convert the value to degrees Celsius so that the correct value is displayed in the logo.

3.9.2. Setting the Temperature Source

This option is used to select the source of the temperature that will be displayed in temperature type logos. The following items are available in the drop down menu:

Probe: Select *Probe* to take the temperature from the optional temperature probe.

See section 2.9 for more information on using the temperature probe.

Manual: Select *Manual* to manually set the temperature via the *Set Temperature* menu item.

METAR: Select *METAR* to take the temperature from METAR data acquired via the Internet.

3.9.3. Setting the Static Temperature

This option is used to set the temperature to be displayed in temperature type logos when the "Temperature Source" is set to *Manual*.

3.9.4. Temperature Read Loss

This option is used to set the behaviour when the temperature source is lost. The following items are available in the drop down menu:

Show Blank: Selecting *Show Blank* will display nothing.

Last Valid: Selecting *Last Valid* will display the last valid temperature.

3.10. TRANSITION TAB

The 7825DSK2-LG-HD can transition between the video sources using a variety of standard transition types. The *TRANSITION* setup window is used to configure the transition type, rate, pause, and swap mode.

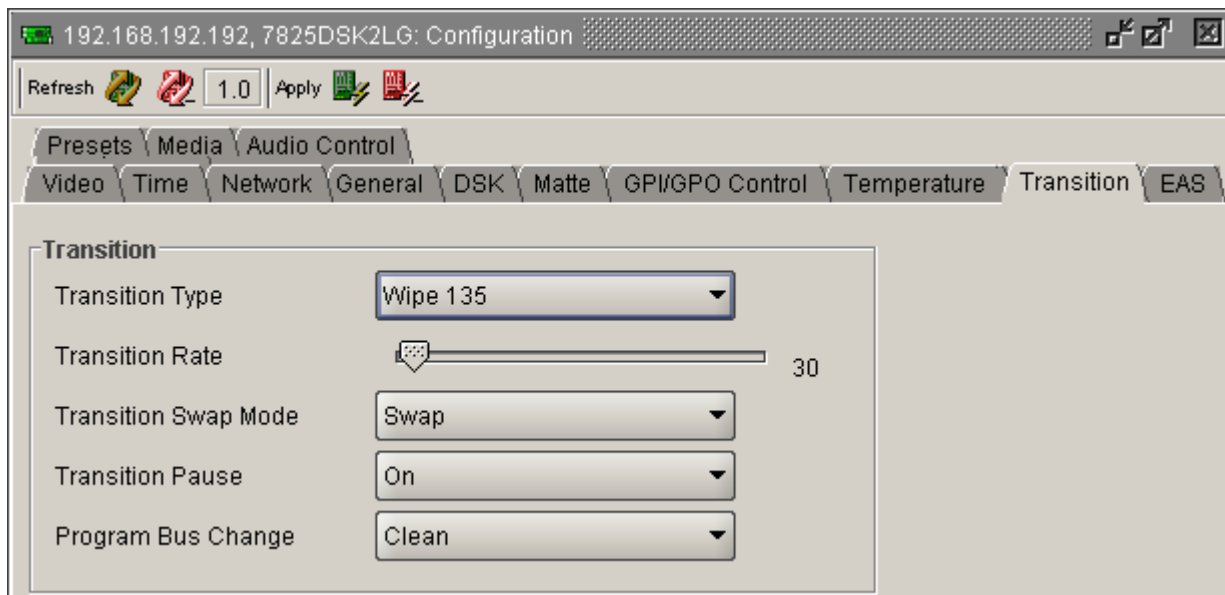


Figure 3-10: Transition Window

3.10.1. Setting the Transition Type

This option is used to select the type of transition you would like applied when the *DO TRANSITION* button is pressed. (See section 3.13.5) Transition effects only appear on the program output bus. Transitions on the preview output bus are always a Cut type performed at the end of the transition to program. The following items are available in the drop down menu:

Fade	Box Out	BL Box
Cut	Box In	Wipe 315
Fade-Cut	TB Split	Wipe 270
Fade-Fade	LR Split	Wipe 225
Cut-Fade	TB Curtain	Wipe 180
Diamond Out	LR Curtain	Wipe 135
Diamond In	TR Box	Wipe 90
Circle Out	TL Box	Wipe 45
Circle In	BR Box	Wipe 0

In order to select the desired transition type, choose from the following drop down menu options under the *Transition Type* tab:



The numbers following the wipe patterns reference the angle of the wipe and direction of the wipe. Arrows indicate the direction of the wipe. For example, a *Wipe 45* transition will start a 45 degree wipe that will progress from the top left of the screen to the bottom right of the screen. Please refer to Figure 3-11.

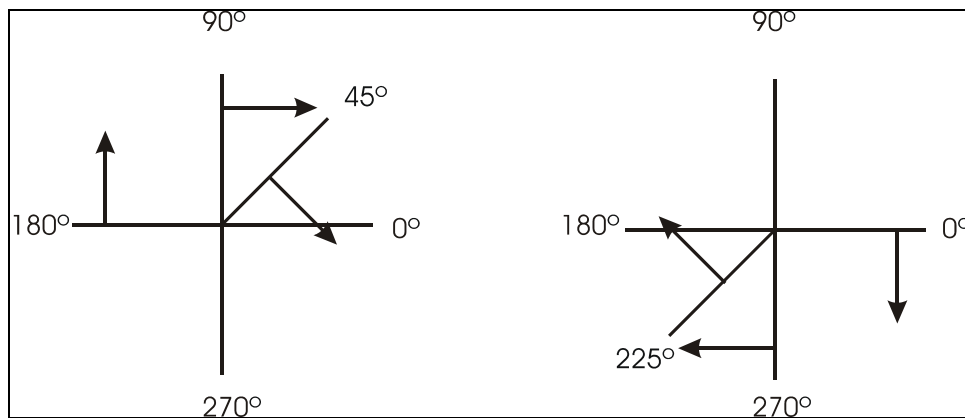


Figure 3-11: Wipe Pattern Angles

3.10.2. Setting the Transition Rate

This option is used to set the duration (time) of the transition. The duration is measured in frames.

3.10.3. Setting the Transition Swap Mode

When set to *Swap* the input video and audio of the Preview Bus and the Program Bus will be swapped at the end of the transition. Logos and other media being keyed on the respective buses will also be swapped with the inputs.

When set to *No Swap* the input video and audio of the Preview Bus will be transferred to the Program Bus transition. Logos and other media being keyed on the Preview Bus will also be transferred to the Program Bus. The Preview Bus will remain unchanged.

3.10.4. Pausing a Transition

This option is used to set whether the Transition can be paused. The following items are available in the drop down menu:

When set to *On*, the transition may be paused by pressing the *TAKE* button while the transition is being performed. To continue the transition, press the *TAKE* button again.

When set to *Off*, the transition cannot be paused.

3.10.5. Setting Program Bus Change

This menu describes the action when the user makes a “Hot cut” on the program bus. For instance, rather than selecting the next source on the Preset bus and then executing a transition, the next source will cut out directly onto the Program bus. The following items are available in the drop down menu:

Clean: When set to *Clean*, the audio and video transition will be a clean, smooth action.

Hard: When set to *Hard*, the audio and video transition will be a hard, abrupt action.

3.11. EAS TAB

The *EAS* tab enables the user to configure the EAS parameters.

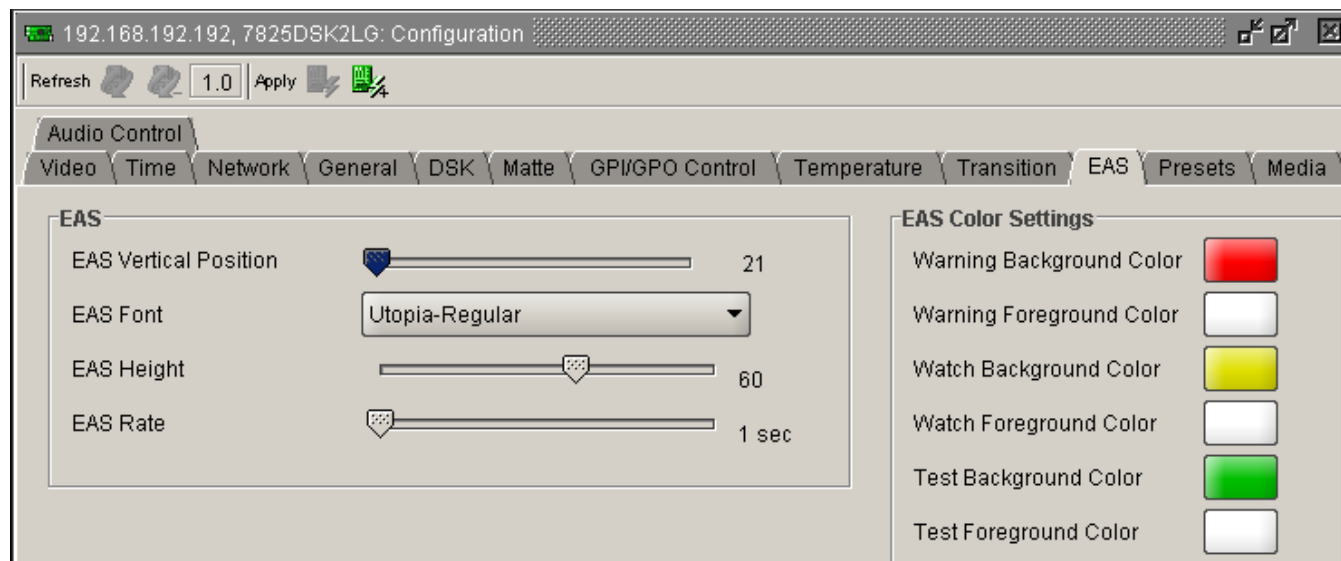


Figure 3-12: EAS Window

3.11.1. EAS over TCP/IP

The 7825DSK2-LG-HD firmware implements the DVS/168 protocol, referred to informally as EAS over TCP/IP. FTP is used to send text files to insert as crawls and WAV files to play as audio clips. Refer to the HTML section 6 to configure the playback of the EAS audio.

EAS over TCP/IP (EAS over Ethernet) is supported with Trilithic's EASy Plus box. For further details, refer to the step-by-step instructions in the Trilithic “EASyPlus” Setup Tech Note. EAS over TCP/IP is also supported by the Dasdec device. For further details refer to Dasdec’s documentation or support.

3.11.1.1. Setting the EAS Vertical Position

The **EAS Vertical Position** option is used to set the vertical position of the EAS scrolling text message. The *Vert Pos'n* value is the video line where the top of the scrolling message will be placed. The range for placement is from 21 to 379 as set by the FCC rules.

3.11.1.2. Setting the EAS Font

The **EAS Font** option is used to set the font that will be used for the EAS scrolling text message.

3.11.1.3. Setting the EAS Height

The **EAS Height** option is used to set the font size that will be used for the EAS scrolling text message.

The EAS height is the vertical size of the font measured in lines of video.

3.11.1.4. Setting the EAS Rate

The **EAS Rate** option is used to set the speed with which the scrolling text moves from right to left across the screen measured in samples per field.

The default is 16.0 samples. The parameter is adjusted in 0.1 sample increments.

3.11.2. EAS Colour Settings

There are three different levels of EAS messages – warning messages, watch messages and test messages. Each message typically has a different background and foreground colour associated with it so that the viewer will immediately know the severity of the EAS alert.

In order to change colour settings for the background and foreground parameters, select the colour palette on the right of the EAS screen and the “Choose a Colour” dialog box will appear. In this dialog box the user can select a colour using Swatches, HSB, and RGB formats.

3.12. PRESETS TAB

The 7825DSK2-LG-HD has 10 user presets that can store pre-defined configurations for such things as Matte settings, Transition settings and DSK settings. The parameter values stored are the menu settings that are currently based on the status of the Program Bus. Therefore, if you would like to store a preset that has a 2.35 matte applied, you must first configure the “Matte Aspect” and “Matte Enable” options, and then store the preset at one of the user preset addresses. When presets are recalled, the settings are recalled to the Preview Bus and will not show on the Program Bus until the *DO TRANSITION* button is pressed, or a GPI trigger invokes the transition.

The *PRESET* setup window is used to store and recall user presets.



After upgrading the 7825DSK2-LG-HD with new firmware, all presets should be recalled using the *Recall Preset* menu item, the values for new features must be set, and the preset must be saved again using the *Store Preset* menu item.

IF THIS IS NOT DONE, OLD PRESETS COULD BE RECALLED WITH UNDESIRABLE SETTINGS.

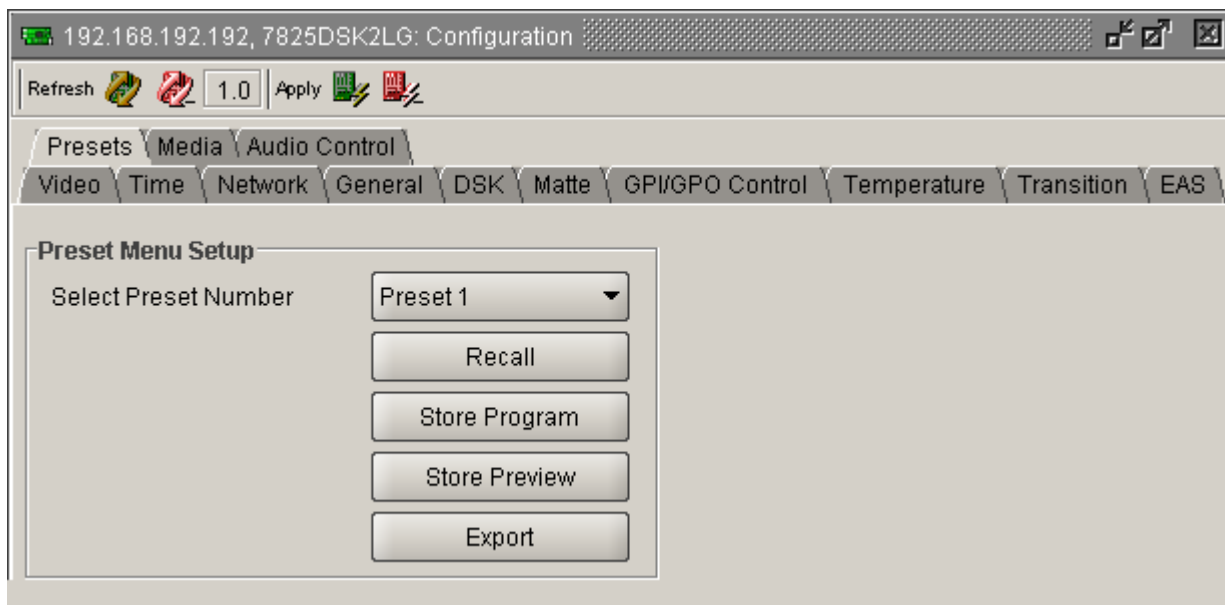



Figure 3-13: Presets Window

- PRESET:** Using the drop down menu, select the preset number to store or recall.
- RECALL:** This item is used to recall 1 of the 10 user presets to the Preview Bus.
- STORE PROGRAM:** This item is used to store the Program Bus settings to 1 of the 10 user presets. Select *Store Program* to use the Program Bus as the source of the preset settings.
- STORE PREVIEW:** Select *Store Preview* to use the Preview Bus as the source of the preset settings.

EXPORT: This menu item is used to send the settings to 1 of the 10 user presets to the console serial port (UPGRADE 232) as ASCII text. This function is useful in archiving the settings of the presets or for diagnostic purposes.

3.13. MEDIA TAB

The *MEDIA* setup window controls all the parameters for individual logos and media. It also controls the Program and Preview bus for the 7825DSK2-LG-HD.

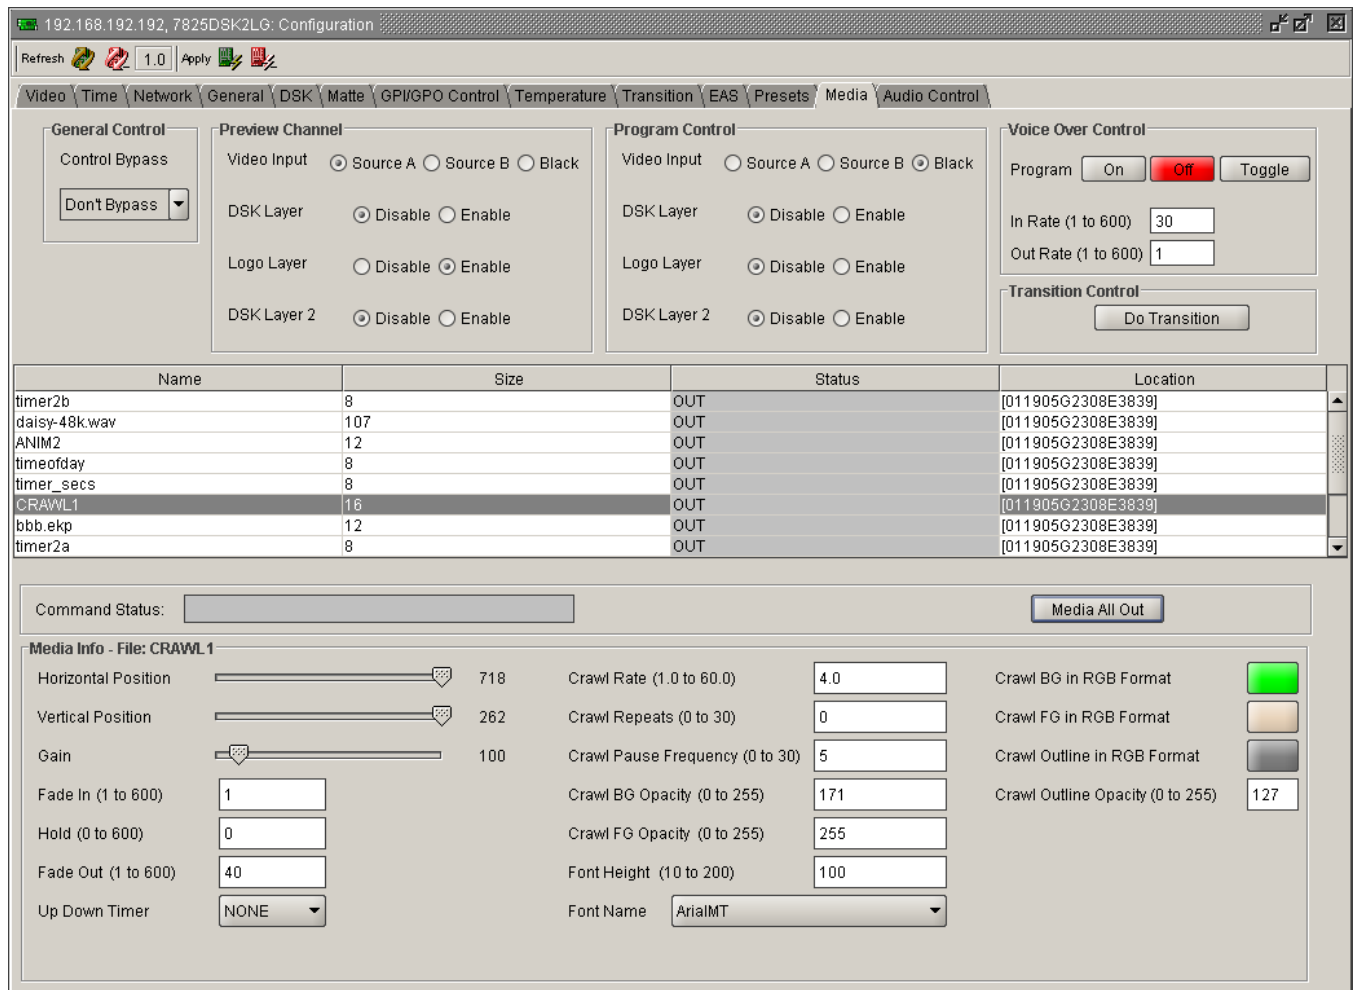

192.168.192.192, 7825DSK2LG: Configuration

Refresh [Icons] 1.0 Apply [Icons]

Video Time Network General DSK Matte GPI/GPO Control Temperature Transition EAS Presets **Media** Audio Control

General Control
Control Bypass

Preview Channel
Video Input ☒ Source A ☐ Source B ☐ Black
DSK Layer ☒ Disable ☐ Enable
Logo Layer ☐ Disable ☒ Enable
DSK Layer 2 ☒ Disable ☐ Enable

Program Control
Video Input ☐ Source A ☐ Source B ☒ Black
DSK Layer ☒ Disable ☐ Enable
Logo Layer ☒ Disable ☐ Enable
DSK Layer 2 ☒ Disable ☐ Enable

Voice Over Control
Program
In Rate (1 to 600)
Out Rate (1 to 600)
Transition Control

Name	Size	Status	Location
timer2b	8	OUT	[011905G2308E3839]
daisy-48k.wav	107	OUT	[011905G2308E3839]
ANIM2	12	OUT	[011905G2308E3839]
timeofday	8	OUT	[011905G2308E3839]
timer_secs	8	OUT	[011905G2308E3839]
CRAWL1	16	OUT	[011905G2308E3839]
bbb.ekp	12	OUT	[011905G2308E3839]
timer2a	8	OUT	[011905G2308E3839]

Command Status:

Media Info - File: CRAWL1

Horizontal Position
Vertical Position
Gain
Fade In (1 to 600)
Hold (0 to 600)
Fade Out (1 to 600)
Up Down Timer

Crawl Rate (1.0 to 60.0)
Crawl Repeats (0 to 30)
Crawl Pause Frequency (0 to 30)
Crawl BG Opacity (0 to 255)
Crawl FG Opacity (0 to 255)
Font Height (10 to 200)
Font Name

Crawl BG in RGB Format ☒
Crawl FG in RGB Format ☐
Crawl Outline in RGB Format ☐
Crawl Outline Opacity (0 to 255)

Figure 3-14: Media Window

3.13.1. General Control

3.13.1.1. Setting the Control Bypass

The **Control Bypass** option controls the bypass relay. When the *Don't Bypass* option is selected, the unit will run in normal operating mode. When the *Bypass* option is selected, the unit will run in bypass mode.

3.13.2. Preview Channel

3.13.2.1. Setting the Video Input

The **Video Input** section allows the user to select one of the following three sources: *Source A*, *Source B*, or *Black* (internal black video generator) as the source for the preview video bus.

3.13.2.2. Setting the DSK Layer

The **DSK Layer** control allows the user to enable or disable the downstream keyer layer for the Preview Bus.

3.13.2.3. Setting the Logo Layer

The **Logo Layer** allows the user to enable or disable the media key layer for the Preview Bus.

3.13.2.4. Setting the DSK 2 Layer

The **DSK 2 Layer** control allows the user to enable or disable the second downstream keyer layer for the Preview Bus.

3.13.3. Program Control

3.13.3.1. Setting the Video Input

The **Video Input** control allows the user to select one of the following three video inputs: *Source A*, *Source B*, or *Black* (internal black video generator) as the source for the program video bus.

3.13.3.2. Setting the DSK Layer

The **DSK Layer** allows the user to enable or disable the downstream keyer layer for the Program Bus.

3.13.3.3. Setting the Logo Layer

The **Logo Layer** control allows the user to enable or disable the media key layer for the Program Bus.

3.13.3.4. Setting the DSK Layer 2

The **DSK Layer 2** allows the user to enable or disable the second downstream keyer layer for the Program Bus.

3.13.4. Voice Over Control

The *Voice Over* control allows the user to adjust the Voice Over options.

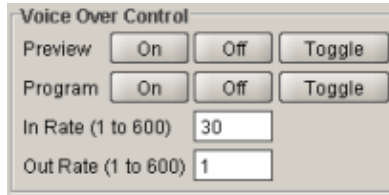


Figure 3-15: Voice Over Control Options

The following options are available for the Preview and Program Voice Over sections.

- On:** Selecting the *On* tab (on the Preview or Program bus) will enable the Voice Over control in preview and program outputs.
- Off:** Selecting the *Off* tab will disable the Voice Over control.
- Toggle:** Selecting the *Toggle* tab will enable the user to toggle between Voice Over controls.
- Voice Over In Rate:** Determines the rate at which the Voice Over fades in with program audio and is measured in fields.
- Voice Over Out Rate:** Determines the rate at which Voice Over fades out with program audio and is measured in fields.

3.13.5. Transition Control

The *DO TRANSITION* button starts a transition of what is displayed on the Preview Bus to the Program Bus. The transition “Type,” “Rate” and “Swap Mode” are set using the options in the *Transition* window (see section 3.10). Transitions can also be triggered using GPI, or automation control.

Within the “Transition” window, when the “Transition Swap Mode” is set to *Swap* the input video and audio of the Preview Bus and the Program Bus will be swapped at the end of the transition. Logos and other media being keyed on the respective buses will also be swapped with the inputs.

When the “Transition Swap Mode” is set to *No Swap* the input video and audio of the Preview Bus will be transferred to the Program Bus. Logos and other media being keyed on the Preview Bus will also be transferred to the Program Bus. The Preview Bus will remain unchanged.

If the *Enable Dynamic Apply* icon is selected, all changes will apply automatically.

3.13.6. Command Status

The *Command Status* field indicates the status of the media command. It will display the current status of the selected command.

3.13.7. Media All Out

Selecting the *Media All Out* button will take out all the media that is currently in *Cue* or *In* status.

3.13.8. Static Logo Configuration Settings

A standard logo refers to an image or an animation. In order to configure a standard logo, click on a logo name in the media list (as illustrated in Figure 3-16) and the media control menu will appear at the bottom of the view.

192.168.192.192, 7825DSK2LG: Configuration

Refresh 1.0 Apply

Video Time Network General DSK Matte GPI/GPO Control Temperature Transition EAS Presets Media Audio Control

General Control
Control Bypass
Don't Bypass

Preview Channel
Video Input ☒ Source A ☐ Source B ☐ Black
DSK Layer ☒ Disable ☐ Enable
Logo Layer ☐ Disable ☒ Enable
DSK Layer 2 ☒ Disable ☐ Enable

Program Control
Video Input ☐ Source A ☐ Source B ☒ Black
DSK Layer ☒ Disable ☐ Enable
Logo Layer ☒ Disable ☐ Enable
DSK Layer 2 ☒ Disable ☐ Enable

Voice Over Control
Program
In Rate (1 to 600)
Out Rate (1 to 600)
Transition Control

Name	Size	Status	Location
timer2b	8	OUT	[011905G2308E3839]
daisy-48k.wav	107	OUT	[011905G2308E3839]
ANIM2	12	OUT	[011905G2308E3839]
timeofday	8	OUT	[011905G2308E3839]
timer_secs	8	OUT	[011905G2308E3839]
CRAWL1	16	OUT	[011905G2308E3839]
bbb.e kp	12	OUT	[011905G2308E3839]
timer2a	8	OUT	[011905G2308E3839]

Command Status:

Media Info - File: timer2b
Horizontal Position
Vertical Position
Gain
Fade In (1 to 600)
Hold (0 to 600)
Fade Out (1 to 600)
Up Down Timer

Figure 3-16: Static Logo Configuration Settings

3.13.8.1. Setting the Logo Horizontal Position

This option is used to set the horizontal position for the current logo. The position is referenced to the left edge of the logo. The range of values depends on video standard in use.

3.13.8.2. Setting the Logo Vertical Position

This option is used to set the vertical position for the current logo. The position is referenced to the top edge of the logo. The range of values depends on the video standard in use.

3.13.8.3. Setting the Logo Transparency (Gain)

This option is used to adjust the opacity (the inverse of transparency) of the logo as a percentage of the original opacity when the logo was created. When the *Gain* value is set at its default value of 100 the logo will be displayed at its original opacity.

For example, if the logo is created at 10% opaque, adjusting the *Gain* value to 200 will render the logo as 20% opaque. If the logo is created at 50% opaque, adjusting the *Gain* value to 200 will render the logo as 100% opaque. *Gain* values resulting in opacity levels above 100% are ignored.

3.13.8.4. Setting the Logo Fade In Duration

This option is used to set the fade in rate for the current logo. The range of values is 1 to 600 frames. The *Fade In* option only applies to static and crawl logos.

3.13.8.5. Setting the Logo Display Time (Hold)

This option is used to set how long the current logo will be displayed. The range of values is 1 to 600 frames. The logo will automatically fade out after the *Hold* time has been completed. Setting the value to *manual* will cause the logo to be displayed until it is manually faded out. The *Hold* option only applies to static and crawl logos.

3.13.8.6. Setting the Logo Fade Out Duration

This option is used to set the fade out rate for the current logo. The range of values is 1 to 600 frames. The *Fade* option only applies to static and crawl logos.

3.13.8.7. Setting the Up Down Timer

The UD Timer (Up Down Timer) selects 1 of the 2 timers for the selected media. The default for the UD Timer is *NONE*.



Note: The Up Down Timer is only used for time objects.

3.13.9. Crawl Logo Configuration Settings

When the Crawl (+CLH) option is added to the 7825DSK2-LG-HD, it has the ability to key scrolling text messages over the program video. In order to set up the crawl logo and enter the text from the crawl logo you will need to use the Overture™ software. The crawl is rendered by Overture™ into a logo (EVL) file and sent to the 7825DSK2-LG-HD. See the Overture™ manual for more information on preparing crawl logos.

The *Media tab* has several items that are used to configure crawl logos, and these items are only available when you select a crawl logo on units fitted with the crawl option. Sections 3.13.9.8 to 3.13.10.1 provide detailed information about each of the settings.

Click on a logo in the media list and the media control menu will appear at the bottom of the view.

Name	Size	Status	Location
MLogo	105	OUT	[card1]
SDEStation	3	OUT	[card1]
HDEMaple2	3	OUT	[card1]
time	5	OUT	[card1]
SDELine	4	OUT	[card1]
SDEMaple	2	OUT	[card1]
HDEStation2	5	OUT	[card1]
crawl	7	OUT	[card1]

Command Status:
Media All Out

Media Info - File: crawl

Horizontal Position	<input type="text" value="0"/>	Crawl Rate (1.0 to 60.0)	<input type="text" value="8.0"/>	Crawl BG in RGB Format	<input checked="" type="checkbox"/>
Vertical Position	<input type="text" value="113"/>	Crawl Repeats (0 to 30)	<input type="text" value="1"/>	Crawl FG in RGB Format	<input type="checkbox"/>
Gain	<input type="text" value="100"/>	Crawl Pause Frequency (0 to 30)	<input type="text" value="5"/>	Logo Layer (-99 to 999)	<input type="text" value="998"/>
Fade In (1 to 600)	<input type="text" value="8"/>	Crawl BG Opacity (0 to 255)	<input type="text" value="128"/>	Logo Quick Fade In Effect	fade
Hold (0 to 600)	<input type="text" value="0"/>	Crawl FG Opacity (0 to 255)	<input type="text" value="255"/>	Logo Quick Fade Out Effect	fade
Fade Out (1 to 600)	<input type="text" value="8"/>	Font Height (10 to 200)	<input type="text" value="48"/>	Crawl Mode	RAMP
		Font Name	Utopia-Regular		

Figure 3-17: Crawl Logo Configuration Settings

3.13.9.1. Setting the Crawl Logo Horizontal Position

This option is used to set the horizontal position for vertical crawls. The position is referenced to the left edge of the logo. The range of values depends on video standard in use.

3.13.9.2. Setting the Crawl Logo Vertical Position

This option is used to set the vertical position for the horizontal crawls. The position is referenced to the top edge of the logo. The range of values depends on video standard in use.

3.13.9.3. Setting the Crawl Logo Transparency (Gain)

This option is used to adjust the opacity (the inverse of transparency) of the logo as a percentage of the original opacity when the logo was created. When the *Gain* value is set at its default value of 100 the logo will be displayed at its original opacity.

For example, if the logo is created at 10% opaque, adjusting the *Gain* value to 200 will render the logo as 20% opaque. If the logo is created at 50% opaque, adjusting the *Gain* value to 200 will render the logo as 100% opaque. *Gain* values resulting in opacity levels above 100% are ignored.

3.13.9.4. Setting the Crawl Logo Fade In Duration

This option is used to set the fade in rate for the current logo. The range of values is 1 to 600 frames. The *Fade In* option only applies to static and crawl logos.

3.13.9.5. Setting the Crawl Logo Display Time (Hold)

This option is used to set how long the current logo will be displayed. The range of values is 1 to 600 frames. The logo will automatically fade out after the *Hold* time has been completed. Setting the value to *manual* will cause the logo to be displayed until it is manually faded out. The *Hold* option only applies to static and crawl logos.

3.13.9.6. Setting the Crawl Logo Fade Out Duration

This option is used to set the fade out rate for the current logo. The range of values is 1 to 600 frames. The *Fade* option only applies to static and crawl logos.

3.13.9.7. Setting the Up Down Timer

The UD Timer (Up Down Timer) selects 1 of the 2 timers for the selected media. The default for the UD Timer is *NONE*.

3.13.9.8. Setting the Crawl Rate

This option is used to set the speed with which the scrolling text moves from right to left across the screen measured in seconds per screen.

For example, it will take 8 seconds for the text to scroll across a screen with a scroll rate of 8. This default value of 8 should provide a comfortable rate, however should you change the size of the font, you should also adjust the scrolling speed.

3.13.9.9. Setting the Crawl Repeats Count

This option is used to set the number of times that the text will scroll across the screen.

- If you set the *Repeat* value to 0 the text will scroll continuously.

3.13.9.10. Setting the Crawl Pause Frequency

This option is used to set the length of time (in seconds) before a new crawl begins. The pause time is measured between the time that the text disappears on the left side of the screen until it appears back on the right side of the screen.

3.13.9.11. Setting the Crawl BG Opacity

There are two options used to set the text (foreground) and background opacity (inverse of transparency) of the crawl logo. For the sake of simplicity, only the option for setting the background opacity (*Crawl BG Opacity*) will be discussed in the manual. The other menu item is used in the same way.

The *Crawl BG opacity* menu item is used to set the background opacity (the inverse of transparency) for the crawl logo.

The opacity value ranges from 0 to 255. Setting the opacity to a value of 255 makes the background completely opaque. Setting the opacity to a value 0 makes the background completely transparent.

3.13.9.12. Setting the Font Height

This option is used to set the font size that will be used for the crawl logo scrolling text message.

The *Font Height* is the vertical size of the font measured in lines of video.

3.13.9.13. Setting the Font Name

This option is used to set the font that will be used for the crawl logo scrolling text message.

3.13.10. Setting the Crawl Logo Colours

There are two menu items used to set the text (foreground) and background colours of the crawl logo. For the sake of simplicity, only the menu item for setting the background colour will be described in the manual. The *Crawl FG in RGB Format* is set the same way.

The *Crawl BG in RGB Format* option is used to set the background colour for the crawl logo.

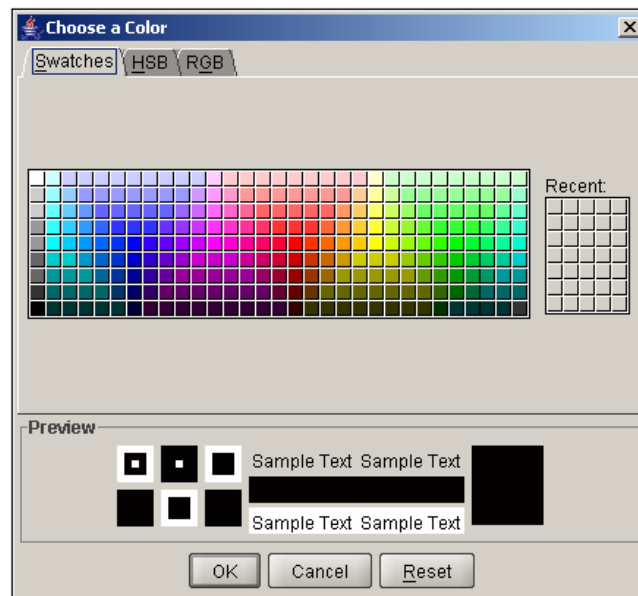


Figure 3-18: “Choose a Colour” Dialog Box

In order to change the colour settings for crawls, select the colour palette on the bottom right of the screen and the “Choose a Colour” dialog box will appear as illustrated in Figure 3-18. In this dialog box the user can select a colour using Swatches, HSB, and RGB formats.

3.13.10.1. Setting the Crawl Outline Opacity

The *Crawl Outline Opacity* control is used to set the opacity of the crawl outline. The opacity value ranges from 0 to 255. Setting the opacity to a value of 255 creates a completely opaque crawl outline. Setting the opacity to a value of 0 creates a completely transparent crawl outline.

3.13.10.2. Setting the Logo Layer

This field allows the user to set the layer level of the selected crawl logo ranging from -99 to 999.

3.13.10.3. Logo Quick In/Fade Out Effect

These drop down menus enable the user to choose a fade in/fade out effect for the selected crawl logo. Both menus provide the following fade in/fade out effects:

Fade	Wipe t -> b (top to bottom)	Push r -> l
Wipe l -> r (left to right)	Wipe b -> t (bottom to top)	Push t -> b
Wipe r -> l (right to left)	Push l -> r	Push b -> t

3.13.11. Selecting a Logo or Media Item and Issuing a Fade/Cue/Fade Out

Name ^	Size	Status	Location
01	5	OUT	[012619I2307L1100]
02	23	OUT	[012619I2307L1100]
1080_CC	9	IN	[012619I2307L1100]
1080_CP	9	OUT	[012619I2307L1100]
1080_DP	8	OUT	[012619I2307L1100]
1080_IP	23	CUED	[012619I2307L1100]
1080_NP	23	OUT	[012619I2307L1100]

Figure 3-19: Issuing a Fade/Cue/Fade Out

Upon selecting a logo or media item under the “Name” column, the user can click on the “Status” column, adjacent to the desired logo, and a drop down screen for selecting ‘IN’, ‘CUED’, and ‘OUT’ will appear. This option allows the user to cue, fade in, and fade out the logo or media item.

Command Status indication will be displayed in the middle of the screen to indicate that the command has been processed and the logo action is successful.



Note: The logos or media items can be ordered alphabetically (using the “Name” column), numerically (by “Size”), or by IN/CUE/OUT status (using the “Status” tab). Simply click on one of the three column headings to view logos or media items in the preferred order.

Name ^	Size	Status	Location
01	5	OUT	[012619I2307L1100]
02	23	OUT	[012619I2307L1100]
1080_CC	9	IN	[012619I2307L1100]
1080_CP	9	OUT	[012619I2307L1100]
1080_DP	8	CUED	[012619I2307L1100]
1080_IP	23	OUT	[012619I2307L1100]
1080_NP	23	OUT	[012619I2307L1100]

Command Status: Processing...

Figure 3-20: Command Status Table

As shown in Figure 3-20, logos that are “on air” are highlighted in green, and logos that are cued are highlighted in orange.

3.13.12. Audio Clip Configuration Settings

The 7825DSK2-LG-HD has the ability to insert audio clips into the program audio path. These clips can be played by themselves or associated with logos in a playlist.

Name	Size	Status	Location
3U	6	OUT	[01261912307L1100]
5old_001	29	OUT	[01261912307L1100]
7_cbig	22	OUT	[01261912307L1100]
7_clock	92	OUT	[01261912307L1100]
7_clock.wav	6	OUT	[01261912307L1100]
7_crawl	12	OUT	[01261912307L1100]
7_crawlO	16	OUT	[01261912307L1100]
7_stat	5	OUT	[01261912307L1100]
7_stat1	5	OUT	[01261912307L1100]
7_time	8	OUT	[01261912307L1100]

Media Info - File: 7_clock.wav
 Audio Clip Repeats (0 to 100)

Figure 3-21: Audio Clip Configuration Settings

3.13.13. Setting the Audio Clip Repeat Count

This menu item is used to set the number of times the audio clip will play.

- If you set the *Repeat* control to 0 the audio clip will play continuously. Otherwise enter into the *Audio Clip Repeats (0 to 100)* field, the appropriate number of times which you wish the audio to repeat.

3.14. AUDIO CONTROL TAB

The *AUDIO CONTROL* tab controls the audio parameters for the selected audio.

192.168.192.192, 7825DSK2LG: Configuration

Refresh 1.0 Apply

Video Time Network General DSK Matte GPI/GPO Control Temperature Transition EAS Presets Media **Audio Control**

Layer	Black		Bkg/A		Fill/B	
	Source	Gain(dB)	Source	Gain(dB)	Source	Gain(dB)
1L	silence	0.0	AEMB1L	0.0	BEMB1L	0.0
1R	silence	0.0	AEMB1R	0.0	BEMB1R	0.0
2L	silence	0.0	AEMB2L	0.0	BEMB2L	0.0
2R	silence	0.0	AEMB2R	0.0	BEMB2R	0.0
3L	silence	0.0	AEMB3L	0.0	BEMB3L	0.0
3R	silence	0.0	AEMB3R	0.0	BEMB3R	0.0
4L	silence	0.0	AEMB4L	0.0	BEMB4L	0.0
4R	silence	0.0	AEMB4R	0.0	BEMB4R	0.0

Layer	Audio Keyer			Audioclip			Voiceover		
	Source	Gain(dB)	Duck(dB)	Source	Gain(dB)	Duck(dB)	Source	Gain(dB)	Duck(dB)
1L	silence	0.0	0.0	CLIP1L	0.0	0.0	silence	0.0	0.0
1R	silence	0.0	0.0	CLIP1R	0.0	0.0	silence	0.0	0.0
2L	silence	0.0	0.0	CLIP1L	0.0	0.0	silence	0.0	0.0
2R	silence	0.0	0.0	CLIP1R	0.0	0.0	silence	0.0	0.0
3L	silence	0.0	0.0	CLIP1L	0.0	0.0	silence	0.0	0.0
3R	silence	0.0	0.0	CLIP1R	0.0	0.0	silence	0.0	0.0
4L	silence	0.0	0.0	CLIP1L	0.0	0.0	silence	0.0	0.0
4R	silence	0.0	0.0	CLIP1R	0.0	0.0	silence	0.0	0.0

PCM

	Non-PCM (A)		Non-PCM (B)	
1L	<input type="radio"/> Yes	<input checked="" type="radio"/> No	<input type="radio"/> Yes	<input checked="" type="radio"/> No
1R	<input type="radio"/> Yes	<input checked="" type="radio"/> No	<input type="radio"/> Yes	<input checked="" type="radio"/> No
2L	<input type="radio"/> Yes	<input checked="" type="radio"/> No	<input type="radio"/> Yes	<input checked="" type="radio"/> No
2R	<input type="radio"/> Yes	<input checked="" type="radio"/> No	<input type="radio"/> Yes	<input checked="" type="radio"/> No
3L	<input type="radio"/> Yes	<input checked="" type="radio"/> No	<input type="radio"/> Yes	<input checked="" type="radio"/> No
3R	<input type="radio"/> Yes	<input checked="" type="radio"/> No	<input type="radio"/> Yes	<input checked="" type="radio"/> No
4L	<input type="radio"/> Yes	<input checked="" type="radio"/> No	<input type="radio"/> Yes	<input checked="" type="radio"/> No
4R	<input type="radio"/> Yes	<input checked="" type="radio"/> No	<input type="radio"/> Yes	<input checked="" type="radio"/> No

Figure 3-22: Audio Control Tab

3.14.1. Parameters

LAYER: This represents the output audio channel for the embedded audio out.

BLACK: This column configures the audio that is used when the 7825DSK2-LG-HD is outputting black. The black function is only accessible via automation commands.

BKG/A: This column configures the background audio that is used when 7825DSK2-LG-HD is passing the video, which is connected to the INPUT BNC connector.

FILL/B: This column configures the fill audio that is used when the 7825DSK2-LG-HD is passing the video, which is connected to the INPUT BNC connector.

AUDIO KEYER: The gain settings boost the associated input audio channel and the duck affects the Bkg layer. The setting above is only active when the unit is in the DSK mode as indicated by the Front Panel LED bus selection. Switching to DSK mode can be executed through the front panel or automation control protocol.

AUDIOCLIP: This column configures which channel(s) the audioclip audio is to be inserted onto. Using this item you can also specify the desired mix levels for audio clips. The audioclip layer is on top of the Black/Bkg/Fill/Audio Keyer layers, therefore the gain settings boost the clip playout and the duck affects the Black/Bkg/Fill/Audio Keyer layer. The above setting provides for the audio clips (when playing) to output on all audio channels, the audio is mixed with the left and right channels of the pre-recorded audioclip. The left and right channels are then mixed with all the output audio channels. You must configure the audioclip layer in order to hear audio clips on the desired output channels. The logo layer must be enabled as indicated by the LED on the front panel in order for audio clips to be mixed. If the logo layer is off, audio clips will play out in memory, but they will not be mixed with the output audio. The audioclip layer is only active when an audioclip is playing out. EAS over TCP messages are played according to the audio clip settings, since the audio is transferred to the keyer as a wav file and played as a normal audio clip.

VOICEOVER: This column is used to configure the input source, which is to be used for voice overs as well as the output channel(s), which the voice over audio is to be inserted into. You can also specify the desired mix levels for voiceovers here.

3.14.2. Settings

SOURCE: Specifies the input source for the output audio channel. The following is a description of each of the choices.

- AEMB1L** - group 1 channel 1 of embedded audio on the input video
- AEMB1R** - group 1 channel 2 of embedded audio on the input video
- AEMB2L** - group 1 channel 3 of embedded audio on the input video
- AEMB2R** - group 1 channel 4 of embedded audio on the input video
- AEMB3L** - group 2 channel 1 of embedded audio on the input video
- AEMB3R** - group 2 channel 2 of embedded audio on the input video
- AEMB4L** - group 2 channel 3 of embedded audio on the input video
- AEMB4R** - group 2 channel 4 of embedded audio on the input video
- AEMB1M** - mono mix of group 1 channels 1 + 2 of embedded audio on the input video
- AEMB2M** - mono mix of group 1 channels 3 + 4 of embedded audio on the input video
- AEMB3M** - mono mix of group 2 channels 1 + 2 of embedded audio on the input video
- AEMB4M** - mono mix of group 2 channels 3 + 4 of embedded audio on the input video
- CLIP1L** - audio clip (wav file playout) 1, left channel
- CLIP1R** - audio clip (wav file playout) 1, right channel
- Silence** - the output audio channel will contain silence

- GAIN:** Sets the output gain for the audio channel in question. To pass the audio through at the received level, set the gain to 0. To boost the audio level, set the gain to a positive value. To reduce the audio level set the gain to a negative value.
- DUCK:** Sets the gain for the program audio when an audio mix is in effect. To pass the background audio through at the received level, set the duck to 0. To boost the background audio level set the duck to a positive value. To reduce the background audio level set the duck to a negative value.
- NON-PCM:** Selects whether the embedded audio is PCM. If the audio is PCM, set Non-PCM to No. If the audio is not PCM, such as Dolby-E, set Non-PCM to Yes.

3.14.3. Wav File Payout

Wav files must either be 48KHz 16bit Stereo uncompressed audio, or 8KHz 8 bit Mono uncompressed audio. The Audioclip layer is on top of the Black/Bkg/Fill/Audio Keyer layers, therefore the gain settings boost the clip payout and the duck affects the active layer of the Black/Bkg/Fill/Audio Keyer layer. The setting above provides for the audio clips (in play mode) to output on all audio channels, the audio is mixed with the left and right channels of the pre-recorded audio clip. The left and right channels are then mixed with all the output audio channels. The audioclip layer must be configured in order to hear audio clips on the desired output channels. The logo layer must be enabled as indicated by the LED on the front panel in order for audio clips to be mixed. If the logo layer is OFF, audio clips will play out in memory, but they will not be mixed with the output audio. In the above example the active audio is lowered by 24dB when a clip plays, and the clip level is raised by 6dB. The audio clip layer is only active when an audio clip is playing out.

Audio clips and logos are treated exactly the same in the media keyers. The naming conventions for both the audio clips and logos are the same.

Alphanumeric can be used for logos and audio clips; however the M2100/Quartz and XY protocol only support numeric file names. If you are controlling them from automation, the logos and audio clips must be numerically named following the protocol of 2 digits (i.e. 01 02, etc).

This page left intentionally blank

CHAPTER 4

TABLE OF CONTENTS

4. HOW TO OPERATE THE DOWNSTREAM KEYS	
USING THE REMOTE CONTROL PANEL.....	4-1
4.1. AN OVERVIEW OF KEY AND DISPLAY FUNCTIONS.....	4-1
4.1.1. Preview Bus Button Group.....	4-1
4.1.2. Program Bus Button Group.....	4-2
4.1.3. The Function Button Group.....	4-2
4.1.4. Setup Button Group	4-3
4.1.5. Control Panel Status Indicators	4-4
4.1.5.1. Preview Bus Status Indicators	4-4
4.1.5.2. Program Bus Status Indicators	4-4
4.1.5.3. Function Status Indicators.....	4-4
4.1.6. Electronics Unit Status Indicators	4-5
4.1.7. Front Panel Display Functions	4-5
4.2. OVERVIEW OF FRONT REMOTE CONTROL PANEL OPERATION	4-5
4.2.1. Displaying Logos.....	4-5
4.3. AN OVERVIEW OF THE SETUP MENU SYSTEM.....	4-5
4.4. NAVIGATING THE SETUP MENU	4-6
4.5. FRONT PANEL SETUP MENU – MAIN MENU	4-8
4.6. GENERAL CONFIGURATION ITEMS.....	4-9
4.6.1. Selecting the Video Standard	4-10
4.6.2. Setting the Video Output Timing With Respect To Reference.....	4-10
4.6.3. Viewing the Firmware Version and Performing an Upgrade.....	4-11
4.6.4. Configuring the Real Time Clock	4-11
4.6.4.1. Displaying the Local Time	4-12
4.6.4.2. Displaying the UTC Time	4-12
4.6.4.3. Setting the Real Time Clock.....	4-12
4.6.4.4. Setting the Time Zone Offset	4-13
4.6.4.5. Enabling Daylight Saving Time Compensation	4-13
4.6.4.6. Selecting Whether the Time Code input is UTC or Local Time.....	4-13
4.6.4.7. Synchronizing the Real Time Clock to the UTC Time	4-14
4.6.4.8. Displaying the Local Date	4-14
4.6.4.9. Displaying the UTC Date.....	4-14
4.6.4.10. Setting the Real Time Date	4-14
4.6.4.11. Setting the LTC Date Format	4-15
4.6.5. Setting Up the Network Addresses	4-15
4.6.5.1. Setting Up the IP Address.....	4-15
4.6.5.2. Setting Up the Sub Net Mask.....	4-15
4.6.5.3. Setting Up the Gateway	4-15
4.6.5.4. Displaying the Ethernet Hardware Address	4-16
4.6.6. Displaying SNMP Trap Destination.....	4-16
4.6.7. Displaying AFD Logo Trigger.....	4-16
4.6.8. Setting the Serial Protocol for COM Ports D and E	4-16
4.6.9. Setting the Genlock Status	4-17
4.6.10. Protecting Line 21 Captions.....	4-18

4.6.11. Setting the Unit Name	4-18
4.6.12. Setting the Up Down Timer	4-18
4.6.13. Automation Debug Functions	4-19
4.7. FILE MANAGEMENT CONFIGURATION ITEMS.....	4-20
4.7.1. Selecting the Source Media	4-20
4.7.2. Selecting the Media File Name	4-20
4.7.3. Selecting the Destination Media	4-21
4.7.4. Deleting a File	4-21
4.7.5. Erasing all the Files from a Media Disk.....	4-21
4.8. MATTE CONFIGURATION ITEMS	4-21
4.8.1. Turning the Matte On and Off	4-22
4.8.2. Setting the Matte Aspect Ratio	4-22
4.8.3. Setting a User Defined Matte Aspect Ratio	4-22
4.9. DOWNSTREAM KEYS CONFIGURATION ITEMS.....	4-23
4.9.1. Setting the Downstream Key Type	4-23
4.9.2. Setting the Downstream Key Object Transparency	4-23
4.9.3. Setting the Downstream Key Object Offset	4-24
4.9.4. Setting the Downstream Self Key Threshold	4-24
4.9.5. Allowing Automation to Control the Media Layer	4-24
4.10. TRANSITION CONFIGURATION ITEMS.....	4-24
4.10.1. Setting the Transition Type	4-25
4.10.2. Setting the Transition Rate	4-25
4.10.3. Setting the Transition Swap Mode	4-25
4.10.4. Pausing a Transition	4-26
4.10.5. Setting Program Bus Change	4-26
4.11. PRESET CONFIGURATION ITEMS	4-26
4.11.1. Configuring the GPI Inputs.....	4-27
4.11.1.1. Selecting One of the GPI Inputs to Configure	4-27
4.11.1.2. Configuring the GPI Actions	4-28
4.11.2. Configuring the GPO Outputs	4-30
4.11.3. Recalling a User Preset	4-31
4.11.4. Storing a User Preset.....	4-31
4.11.5. Exporting a User Preset.....	4-31
4.11.6. Selecting the Source of the Preset Settings	4-31
4.12. TEMPERATURE CONFIGURATION ITEMS	4-32
4.12.1. Setting the Temperature Source	4-32
4.12.2. Setting the Temperature Format.....	4-32
4.12.3. Setting the Static Temperature	4-33
4.12.4. Temperature Read Loss	4-33
4.13. EAS CONFIGURATION ITEMS (+E OPTIONED UNITS ONLY).....	4-34
4.13.1. TCP/IP	4-34
4.13.2. Setting the Vertical Position of EAS Crawl Display	4-35
4.13.3. Setting the Font used for the EAS Crawl Display	4-35
4.13.4. Setting the Font Size for the EAS Crawl Display	4-35
4.13.5. Setting the Crawl Rate for the EAS Crawl Display.....	4-35
4.13.6. Setting the Colours for the EAS Crawl Display	4-35
4.14. MEDIA CONFIGURATION ITEMS.....	4-37
4.14.1. Setting the Logo Horizontal Position.....	4-38

4.14.2. Setting the Logo Vertical Position	4-38
4.14.3. Setting the Logo Transparency	4-38
4.14.4. Setting the Logo Fade In Duration	4-38
4.14.5. Setting the Logo Display Time	4-39
4.14.6. Setting the Logo Fade Out Duration	4-39
4.14.7. Setting the Up Down Timer	4-39
4.14.8. Crawl Logo Configuration Items (Crawl Optioned Units Only)	4-39
4.14.8.1. Setting the Crawl Logo Horizontal Crawl Rate	4-39
4.14.8.2. Setting the Crawl Logo Repeat Count	4-40
4.14.8.3. Setting the Crawl Logo Pause Time between Repeats	4-40
4.14.8.4. Setting the Crawl Logo Text Font Size	4-40
4.14.8.5. Setting the Crawl Logo Text Font	4-40
4.14.8.6. Setting the Crawl Logo Transparency	4-40
4.14.8.7. Setting the Crawl Logo Colours	4-41
4.14.9. Audio Clip Configuration Items	4-41
4.14.9.1. Setting the Audio Clip Repeat Count	4-41
4.14.9.2. Audio Clip Configuration	4-41

Figures

Figure 4-1: 7825DSK2-LG-HD – Front Remote Control Panel Layout	4-1
Figure 4-2: 7825DSK2-LG-HD – Back Remote Control Panel Layout	4-1
Figure 4-3: Overview of the Setup Menu System	4-7

Tables

Table 4-1: Top Level of the General Setup Menu	4-9
Table 4-2: Top Level of the Manage Files Setup Menu	4-20
Table 4-3: Top Level of the Matte Setup Menu	4-21
Table 4-4: Top Level of the DSK Setup Menu	4-23
Table 4-5: Top Level of the Transition Setup Menu	4-24
Table 4-6: Top Level of the Preset Setup Menu	4-27
Table 4-7: Top Level of the EAS Setup Menu	4-34
Table 4-8: Top Level of the Media Setup Menu	4-37

This page left intentionally blank

4. HOW TO OPERATE THE DOWNSTREAM KEYER USING THE REMOTE CONTROL PANEL

The standard 7825DSK2-LG-HD is a 2 slot card contained within the 7800FR. The 7825DSK2-LG-HD is operated by a 1RU rack mount panel or desktop control panel. This chapter describes the operation of the 7825DSK2-LG-HD using the remote control panel. For information about controlling the 7825DSK2-LG-HD using the desktop control panel see section 7. For information about connecting the remote control panel to the 7825DSK2-LG-HD see section 2.4.

4.1. AN OVERVIEW OF KEY AND DISPLAY FUNCTIONS

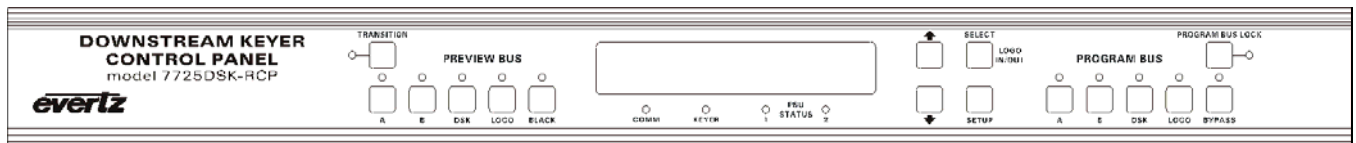


Figure 4-1: 7825DSK2-LG-HD – Front Remote Control Panel Layout



Figure 4-2: 7825DSK2-LG-HD – Back Remote Control Panel Layout

The remote control panel consists of a 16 digit alphanumeric display, 16 buttons and 16 LED status indicators.

The buttons are used to provide control of the 7825DSK2-LG-HD, to switch the various input sources, and to navigate the front panel *Setup* menu system. The front panel control provides a quick and simple method of configuring the 7825DSK2-LG-HD Downstream Keyer for your application.

4.1.1. Preview Bus Button Group

- A:** This button selects the video from the **PGM IN A** input for the preview video output bus.
- B:** This button selects the video from the **PGM IN B** input for the preview video output bus.
- DSK:** This button controls the downstream keyer layer for the preview video output bus. If the LED is not illuminated, then the downstream keyer layers are not active on the Preview Bus. If the LED is ON then the downstream keyer layers are enabled on the Preview Bus.

When the downstream keyer layer is enabled, the video present on the **FILL** video input is mixed with the background video (**PGM IN A or B**) based on the key signal provided on the **KEY** video input, or it can be self-keyed, using user defined thresholds. See section 4.9 for information about setting up the *DSK MODE* and other settings.

LOGO: This button controls the complete media key layer for the preview output bus. The media key layer includes the logo layer for the video and the voiceover layer for the audio. Logos cannot be displayed when the media key layer is off. If the LED is not illuminated, then the media key layer is not active. If the button LED is ON then the media key layer is enabled on the preview output bus.

BLACK: This button selects the internal black generator as the source for the applicable video output bus. When the LED above the Black button is ON then the black generator is the source for the preview video output bus. When the LEDs above the Program Bus **A**, **B** and **DSK** buttons are OFF then the black generator is the source for the program video output bus. This can be accomplished by selecting Black as the Preview Bus source and then pressing the **TRANSITION** button.

4.1.2. Program Bus Button Group

A: This button selects the video from the **PGM IN A** input for the program video output bus.

B: This button selects the video from the **PGM IN B** input for the program video output bus.

DSK: This button controls the downstream keyer layers for the program video output bus. If the LED is not illuminated, then the downstream keyer layers are not active on the Program Bus. If the LED is ON then the downstream keyer layers are enabled on the Program Bus.

When the downstream keyer layer is enabled, the video present on the **FILL** video input is mixed with the background video (on the **PGM IN A or B**) based on the key signal provided on the **KEY** video input, or it can be self-keyed using user defined thresholds. See section 4.9 for information about setting up the *DSK MODE* and other settings.

LOGO: This button controls the complete media key layer for the program output bus. The media key layer includes the logo layer for the video and the voiceover layer for the audio. Logos cannot be displayed and voiceovers cannot be performed when the media key layer is off. If the LED is not illuminated, then the media key layer is not active. If the button LED is ON then the media key layer is enabled on the program output bus.

BYPASS: This button controls the bypass relays. The LED indicates that the unit is in manual *Bypass* mode when it is On. When the unit is in *Bypass* mode, the program input video is directly connected to the **PGM IN A** video output. The unit will revert to *Bypass* mode in the event of a power loss also.

4.1.3. The Function Button Group

TRANSITION: This button starts a transition of what is displayed on the Preview Bus to the Program Bus. The transition *Type*, *Rate* and *Swap Mode* are set using the menu items in the *Transition* menu item (see section 4.10). Transitions can also be triggered using GPI, or automation control. The LED indicates that a transition from the Preview Bus to the Program Bus is in progress when it is illuminated, regardless of how the transition was triggered.

When the *Transition Swap Mode* is set to *Swap* the input video and audio of the Preview Bus and the Program Bus will be swapped at the end of the transition. Logos and other media being keyed on the respective buses will also be swapped with the inputs.

When the *Transition Swap Mode* is set to *No Swap* the input video and audio of the Preview Bus will be transferred to the Program Bus. Logos and other media being keyed on the Preview Bus will also be transferred to the Program Bus. The Preview Bus will remain unchanged.

PROGRAM BUS LOCK: This button will lock the front panel PROGRAM BUS controls so that changes cannot be made to the program output bus. The **PGM BUS LOCK** LED will turn ON indicating that the front panel PROGRAM BUS buttons are disabled. When any of these buttons are pressed, the front panel display will show the message *Pgm Bus Locked* for a few seconds. Pressing the **PGM BUS LOCK** button again will return the front panel keys to their normal functions and the LED key will turn OFF indicating that the front panel controls can now affect the Program Bus.



The 7825DSK2-LG-HD may still be controlled from the GPI inputs or the automation when the PROGRAM BUS is Locked. Transitions will also be allowed using the TRANSITION button.

LOGO IN/OUT: This button (also labelled **SELECT**) controls whether a selected logo (the logo shown on the front panel display) is being keyed into the video on the buses with the media key layer enabled. To control whether a logo is keyed or not, you must first enable the media key layer by pressing the **LOGO** button for the bus you want the logo to appear on. The **LOGO** LED for the respective bus must be illuminated for logos to display on that bus. Scroll to the logo required using the **↑** & **↓** buttons. If the logo is currently being keyed its name will flash in the front panel display. To key the logo into the output video buses with the media layer enabled, press the **LOGO IN/OUT** button. The logo will fade in according to its programmed fade in time and the logo name display will begin flashing. If the logo is not currently loaded into memory, a progress indicator will appear to the right of the logo name while it is loading into memory. To remove a keyed logo from the output video buses, press the **LOGO IN/OUT** button when the logo name is flashing. The logo will fade out according to its programmed fade out time and the logo name display will stop flashing.

4.1.4. Setup Button Group

SETUP: This button is used to enter the *Setup* menu, which is used to configure the operating modes of the 7825DSK2-LG-HD. (See section 4.3 for an overview of the *Setup* menu.) When you are in the *Setup* menu, this button is also used to back out of menu selections to the next higher menu level or to exit the *Setup* menu and return to normal panel operation.

SELECT: When in the *Setup* menu, this button is used to choose a sub-menu and navigate to the next level down in the menu structure. When you are at the bottom level of the menu system it also accepts numeric values or makes the displayed menu option the active value for that menu item. When not in the *Setup* menu, this button is also used to fade logos in and out on the selected output bus.



When in the *Setup* menu, the **↑** and **↓** arrow keys are used to move to various items at the current menu level in the menu system. The **↑** and **↓** arrow keys are also used to enter numeric values for menu choices at the bottom level of the menu system.

When not in the *Setup* menu, the **↑** and **↓** arrow keys are used to select a logo to display.

4.1.5. Control Panel Status Indicators

4.1.5.1. Preview Bus Status Indicators

- A:** This LED indicates that the **PGM IN A** video input is selected as the source for the preview video bus.
- B:** This LED indicates that the **PGM IN B** video input is selected as the source for the preview video bus.
- DSK:** This LED indicates that the downstream keyer layer is enabled on the Preview Bus when it is ON. When it is OFF it indicates that the downstream keyer layer is disabled on the Preview Bus.
- LOGO:** This LED indicates that the media key layer is enabled on the Preview Bus when it is ON. When it is OFF it indicates that the logo key layer is disabled on the Preview Bus.
- BLACK:** This button LED indicates that the internal black video generator is selected as the source for the preview video bus when the LED is flashing and for the program video bus when it is ON solid.

4.1.5.2. Program Bus Status Indicators

- A:** This LED indicates that the **PGM IN A** video input is selected as the source for the program video bus.
- B:** This LED indicates that the **PGM IN B** video input is selected as the source for the program video bus.
- DSK:** This LED indicates that the downstream keyer layer is enabled on the Program Bus when it is ON. When it is OFF it indicates that the downstream keyer layer is disabled on the Program Bus.
- LOGO:** This LED indicates that the media key layer is enabled on the Program Bus when it is ON. When it is OFF it indicates that the logo key layer is disabled on the Program Bus.
- BYPASS:** This LED indicates that the unit is in manual *Bypass* mode when it is On.

4.1.5.3. Function Status Indicators

- PGM BUS LOCK:** This LED indicates that the *Panel Lock* function is active and the remainder of the front panel buttons are disabled.
- TRANSITION:** This LED indicates that a transition from the Preview Bus to the Program Bus is in process when it is ON. When it is OFF it indicates that no transition is currently in progress.
- KEYER:** This LED indicates that the downstream keyer layer is enabled on the Program Bus when it is ON and on the Preview Bus when it is flashing. When it is OFF it indicates that the downstream keyer layers are disabled on both buses.

COMM: This LED is used to signal two types of communication to the 7825DSK2-LG-HD. Flashing ON approximately every 1.5 seconds indicates that the control panel is communicating with the main microprocessor in the unit. When the 7825DSK2-LG-HD is under automation control, or logos or other media files are being transferred to or from the unit using Overture™ software, the LED will be on when the unit is receiving data from the control source.

The control panel has lost communication with the main unit if this LED is OFF continuously. In that case check the cabling if you are using a remote control panel. Otherwise the unit may require a reboot if the control buttons on the control panel are not responding.

4.1.6. Electronics Unit Status Indicators

PSU STATUS 1, 2: These green LEDs indicate that the corresponding power to the 7825DSK2-LG-HD is functioning normally. **PSU STATUS 2** LED will be OFF all the time and is not applicable. These LEDs are the only ones present on the electronic units of the remote control versions.

4.1.7. Front Panel Display Functions

The 16 character alphanumeric display is used to show the name of the logo that will be faded in or out by pressing the **LOGO IN/OUT** button. The display is also used to show the *Setup* menu items to configure the downstream keyer.

4.2. OVERVIEW OF FRONT REMOTE CONTROL PANEL OPERATION

4.2.1. Displaying Logos

To control whether a logo is keyed or not, you must first enable the media key layer by pressing the **LOGO** button for the bus you want the logo to appear on. The **LOGO** LED for the respective bus must be illuminated for logos to display on that bus. Scroll to the logo required using the **↑** & **↓** buttons. If the logo is currently being keyed its name will flash in the front panel display. To key the logo into the output video buses with the media layer enabled, press the **LOGO IN/OUT** button. The logo will fade in according to its programmed fade in time and the logo name display will begin flashing. If the logo is not currently loaded into memory, a progress indicator will appear to the right of the logo name while it is loading into memory. To remove a keyed logo from the output video buses, press the **LOGO IN/OUT** button when the logo name is flashing. The logo will fade out according to its programmed fade out time and the logo name display will stop flashing.

4.3. AN OVERVIEW OF THE SETUP MENU SYSTEM

The *SETUP* menu system uses the 16 digit alphanumeric display and provides a quick, intuitive method of configuring the 7825DSK2-LG-HD. These items are often only required to be set up at the time of installation, and do not pertain to the day-to-day operation of the unit. Figure 4-3 provides an overview of the *Setup* menu system.

4.4. NAVIGATING THE SETUP MENU

To enter the *Setup* menu, press the **SETUP** button. This will bring you to the main *Setup* menu where you can use the **↑** & **↓** buttons to move up and down the list of available sub-menus. Once you have chosen the desired sub-menu, press the **SELECT** button to select the next menu level.

Once in a sub-menu, there may be another menu layer, or there may be a list of parameters to adjust. If there is another set of menu options, use the **↑** & **↓** buttons to select the desired menu item and press the **SELECT** button. Continue this process until you get to the bottom of the menu tree where the list of parameters to be adjusted is shown.

To adjust any parameter, use the **↑** & **↓** buttons to move up or down the parameter list to the desired parameter. To view the possible values for that item, press the **SELECT** button. The current value for that parameter will be shown with an asterisk (*). Pressing the **↑** & **↓** buttons allows you to show the possible values for the selected parameter. The various parameter values that are not currently selected will NOT have an asterisk (*). When you have stopped at the desired value, press the **SELECT** button to save your selection. The value will be shown with an asterisk (*), indicating that it is now the current value. To move up one level in the menu press the **SETUP** button.

You can select other parameters from that sub-menu by using the **↑** & **↓** buttons, followed by the **SELECT** button. Alternately you can move up one menu item by pressing the **SETUP** button.

When you have made all the desired changes, press the **SETUP** button one or more times until you return to the top of the Menu tree and exit the *Setup* menu.

Each of the menu items, with function explanations, is described in the following sections.

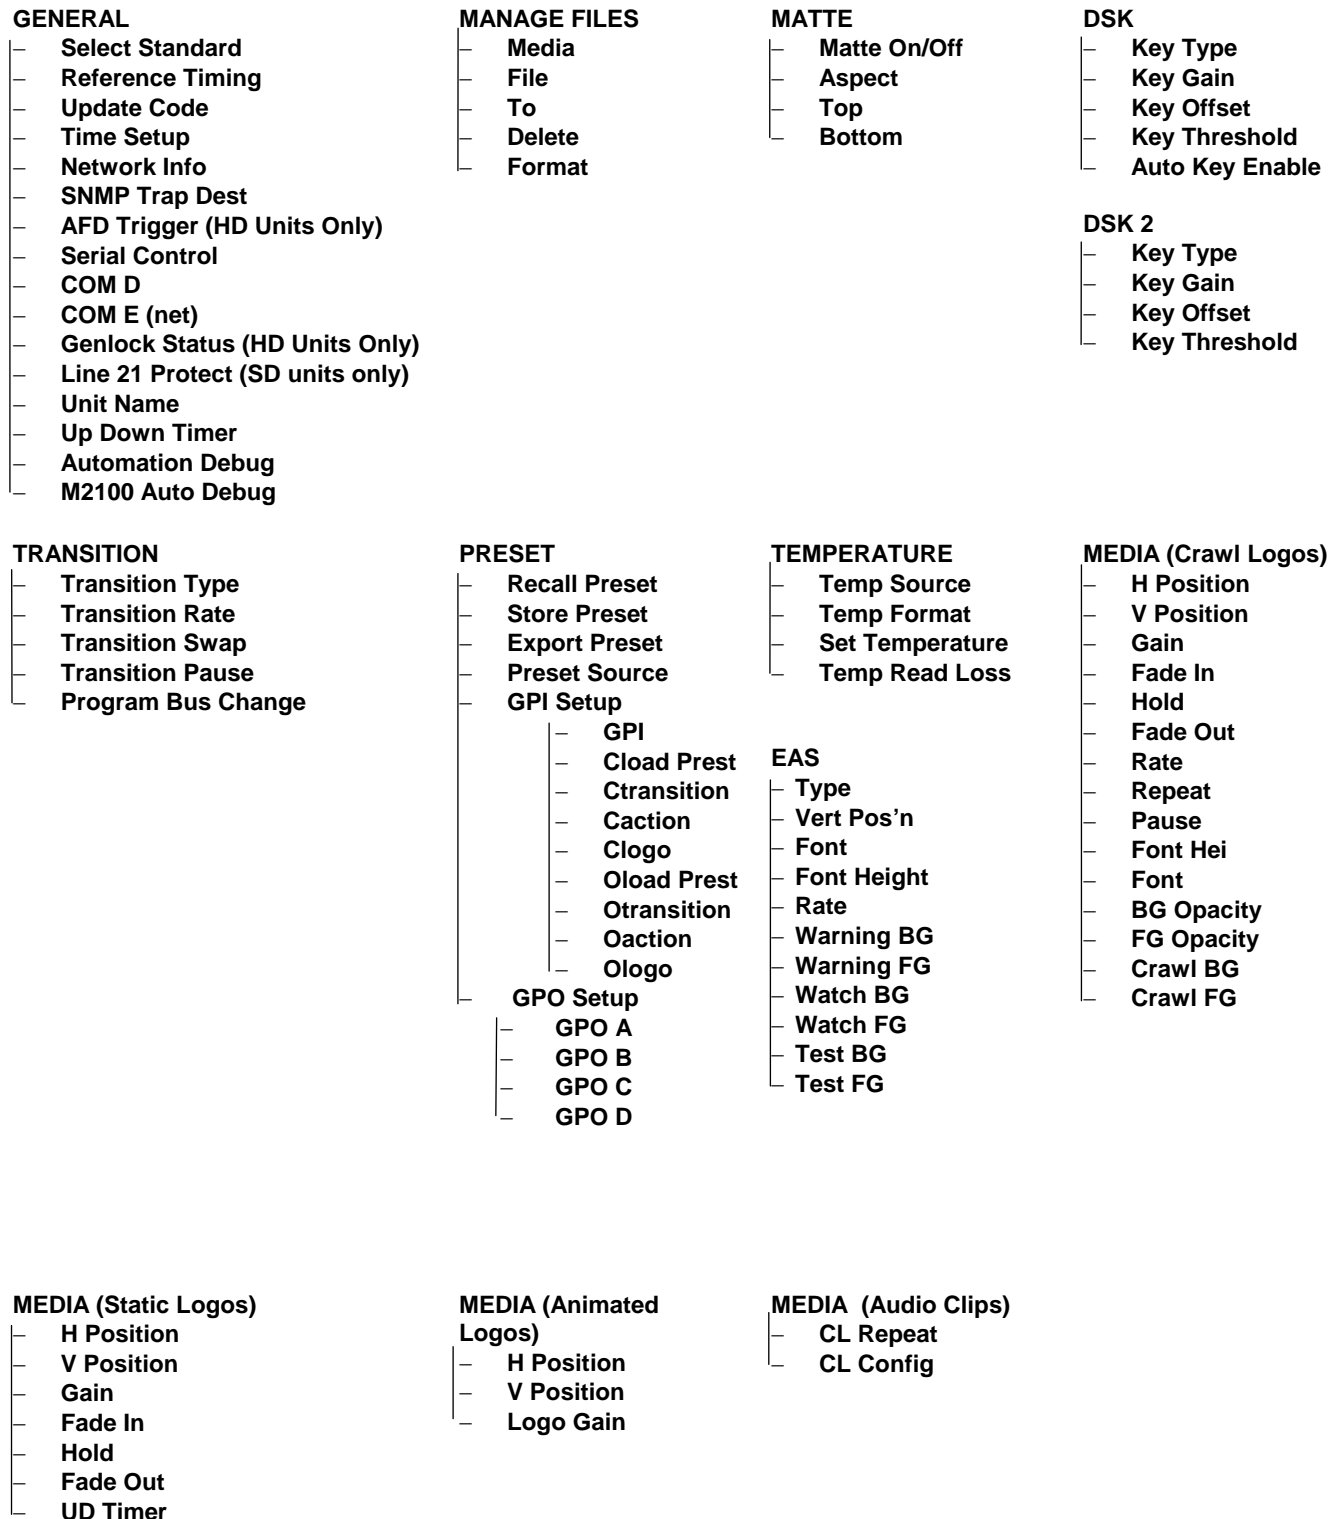


Figure 4-3: Overview of the Setup Menu System

4.5. FRONT PANEL SETUP MENU – MAIN MENU

The front panel *Setup* menu is arranged in a layered structure that groups similar configuration items together. The following section provides a brief description of the first level of menus that appear when you enter the menu. Selecting one of these items will take you to the next menu level. Sections 4.6 to 4.14 provide detailed descriptions of each of the sub-menus. The tables in these sections are arranged in an indented structure to indicate the path taken to reach the control. Menu items or parameters that are underlined indicate the factory default values.

<i>GENERAL</i>	This menu is used to set up the video standard, COM ports, network address, time and other miscellaneous settings and to update firmware.
<i>MANAGE FILES</i>	This is used to set up various items related to moving and managing logo files.
<i>MATTE</i>	This menu is used to configure the black overlay matte attributes.
<i>DSK</i>	This menu is used to configure the DSK functions – key type, gain, and thresholds.
<i>TRANSITION</i>	This menu is used to set up the transition type, rate and swap mode.
<i>PRESET</i>	This menu is used to save and recall user presets, and to configure the General Purpose inputs and outputs.
<i>TEMPERATURE</i>	This menu is used for setting temperature source, format and temperature.
<i>EAS</i>	This menu is used to configure the EAS crawl functions – speed, position, font type and height, and colours (only on EAS optioned units)
<i>MEDIA</i>	This menu is used to adjust media parameters such as to set their fade in, hold and fade out time etc.

4.6. GENERAL CONFIGURATION ITEMS

The *GENERAL Setup* menu is used to set up various items related to the overall operation of the 7825DSK2-LG-HD such as Video Standard, Time settings, Network info, COM port settings and firmware versions. Table 4-1 shows the items available in the *GENERAL Setup* menu. Sections 4.6.1 to 4.6.13 provide detailed information about each of the sub-menus.

<i>Select Standard</i>	Sets the video standard
<i>Reference Timing</i>	Configures the reference timing of the device
<i>Update Code</i>	Displays product name, firmware version, and option to upgrade unit
<i>Time Setup</i>	Configures the real time clock and LTC timecode input
<i>Network Info</i>	Configures the Ethernet Network Address for FTP uploads
<i>SNMP Trap Dest</i>	Configures the IP address for SNMP Traps
<i>AFD Trigger</i>	Configures the handling of AFD triggers.
<i>Serial Control</i>	Configures the function of the SERIAL CONTROL (COM C) Port
<i>COM D</i>	Configures the function of the COM D serial port
<i>COM E (net)</i>	Configures the function of the virtual serial port (COM E)
<i>Genlock Status</i>	Displays genlock status
<i>Line 21 Protect</i>	Controls whether logos can be placed on Line 21.
<i>Unit Name</i>	Sets the unit name when used with a M2100 control panel
<i>Up Down Timer</i>	Configures the two up/down timers for time logos
<i>Automation Debug</i>	Debugging tool for the Evertz automation protocol
<i>M2100 Auto Debug</i>	Debugging tool for the M2100 automation protocol

Table 4-1: Top Level of the General Setup Menu

4.6.1. Selecting the Video Standard

GENERAL
<i>Select Standard</i>
<i>525i</i>
<i>16x9 525i</i>
<i>625i</i>
<i>720p/50</i>
<i>720p/59.94</i>
<i>1080i/50</i>
<i>1080i/59.94</i>

The *Select Standard* menu item is used to set the video standard in use.

Select *525i/59.94* for operation with 4 x 3 aspect ratio 525i/59.94 video conforming to SMPTE 125M.

Select *16x9 525i* for operation with 16 x 9 aspect ratio 525i video conforming to SMPTE 125M.

Select *625i/50* for operation with 4 x 3 aspect ratio 625i/50 video conforming to EBU TECH 3267-E.

Select *720p/50* for operation with 720p/50 video conforming to SMPTE 296M.

Select *720p/59.94* for operation with 720p/59.94 video conforming to SMPTE 296M.

Select *1080i/50* for operation with 1080i/50 video conforming to SMPTE 274M.

Select *1080i/59.94* for operation with 1080i/59.94 video conforming to SMPTE 274M.

4.6.2. Setting the Video Output Timing With Respect To Reference

GENERAL
<i>Reference Timing</i>
<i>Type</i>
<i>In Video</i>
<i>In Genlock</i>
<i>Ref 1</i>
<i>Ref 2</i>

This menu item allows the user to set the reference type. The downstream keyer can be referenced by the input video or by the source applied to the **GENLOCK** BNC.

Selecting REF 1 or REF 2 sets the frame genlock reference to genlock (frame 1) or genlock (frame 2).

Frame genlock is where the genlock signal is connected to the 7800 frame and run through the backplane to each board that is plugged in. It has the same function as the genlock input, but it requires only one connector per frame rather than one per card. There are two connectors on the 7800 frame for a choice of two genlock inputs. Therefore, the user can choose either *In Video* (use input video signal's frame sync), *In Genlock* (backplane), *Ref 1* (frame, 1) or *Ref 2* (frame, 2).



The *H and V Phase Offset* adjustment is a REAL TIME ADJUSTMENT and will affect the output video timing immediately. These settings should not be adjusted when the output video is in the broadcast chain.

GENERAL

<i>Reference Timing</i>

<i>H: 0 to max samples</i>

This menu item allows you to set the horizontal timing of the output video with respect to the genlock reference input. Setting this control to 0 keeps the output video in time with the genlock reference.

Increasing the value will delay the output video in one-sample increments. In order to advance the horizontal timing of the output video with respect to the genlock video, set the control to the maximum number of samples per line for the output video standard minus the number of samples that you wish to advance the output video. (E.g. for 1080i/59.94 output video the total number of samples per line is 2200, so to advance the output video 5 samples set the value to 2195.)

GENERAL

<i>Reference Timing</i>

<i>V: 0 to max lines</i>

This menu item allows you to set the vertical timing of the output video with respect to the genlock reference input. Setting this control to 0 keeps the output video in time with the genlock reference.

Increasing the value will delay the output video in one-line increments. In order to advance the vertical timing of the output video with respect to the genlock video, set the control to the maximum number of samples per line for the output video standard minus the number of samples that you wish to advance the output video. (E.g. for 1080i/59.94 output video the total number of samples per line is 2200, so to advance the output video 5 samples set the value to 2195.)

4.6.3. Viewing the Firmware Version and Performing an Upgrade

GENERAL

<i>Update Code</i>

7825DSK2LG-HD x.xx build xxx boot 1.01 yes-upgrade now no-don't upgrade

This menu will inform the user of the product name, firmware, and boot firmware.

It will also give the user an option if they would like to upgrade the firmware in the unit.

(Note: Firmware upgrades can be performed using Overture, refer to section 9)

4.6.4. Configuring the Real Time Clock

The 7825DSK2-LG-HD contains a real time clock that is used to drive the clock display logos that can be placed on the screen. This battery backed up real time clock (known as RTC) free runs on an internal oscillator and can be set from the front panel. When the 7825DSK2-LG-HD is powered up with a valid video input, a separate clock (known as the UTC) is initialized from the RTC and maintains Universal Coordinated time (UTC) accurately from the video input so that it will not drift. The 7825DSK2-LG-HD automatically updates the RTC clock from the UTC clock to minimize long term time drift. In order to keep the UTC clock in sync with your house master time code it should also be locked to incoming linear time code connected to the LTC IN connector. The UTC clock time is internally maintained as Universal Coordinated Time (UTC) but can also be adjusted for time zone offsets from UTC and for daylight saving time, and displayed as local time (Local). The *Time Setup* sub-menus of the *General* setup menu are used to configure the real time clock and display the UTC and Local times.

4.6.4.1. Displaying the Local Time

GENERAL
Time Setup
Local 12:34:50

This menu item is used to display the clock time as local time. (UTC time adjusted for the time zone offset and DST adjustment). The time displays are always shown in the 24 hour time format.

4.6.4.2. Displaying the UTC Time

GENERAL
Time Setup
UTC 12:34:50

This menu item is used to display the UTC time clock. The time displays are always shown in the 24 hour time format.

4.6.4.3. Setting the Real Time Clock

GENERAL
Time Setup
RTC 12:34:50

This menu item is used to display and set the hardware real time clock in the 7825DSK2-LG-HD. The time displays are always shown in the 24 hour time format.

When you press the **SELECT** button, the display shows the current real time clock time which will look similar to the following:

12:34:50

To set the real time clock press the **SELECT** button and the hours digits will be flashing to indicate that they are in entry mode. Use the **↑** or **↓** buttons to change the hours to the desired value. Then press the **SELECT** button and the minute's digits will begin flashing to indicate that they are in entry mode. Set the minutes and seconds in the same way. When you have entered the correct time press the **SELECT** button to update the hardware real time clock. The second's digits will stop flashing and the time will begin incrementing to indicate that the Real Time Clock has been set. When you set the hardware real time clock the UTC clock time will automatically be adjusted.



When there is a valid LTC input to the 7825DSK2-LG-HD, the LTC time will overwrite the Real Time clock that has been entered.

4.6.4.4. Setting the Time Zone Offset

GENERAL
Time Setup
Zone +00:00:00

This menu item allows the user to set a time zone offset between the UTC time and the Local time. This time zone offset will be added to the UTC time along with the Daylight Saving time correction (see section 4.6.4.5) to obtain the Local time. Time zones are normally in one hour or 30 minute increments and can be + or – from UTC. (Time zones east of Greenwich are +, and time zones west of Greenwich are -)

To set the time zone press the **SELECT** button and the hours digits will begin flashing to indicate that they are in entry mode. Use the **↑** or **↓** buttons to change the hours to the desired value. To set negative time zone offsets continue pressing the **↑** or **↓** buttons until the hours values show a negative sign. Then press the **SELECT** button and the minutes digits will begin flashing to indicate that they are in entry mode. Set the minutes and seconds in the same way. When you have entered the correct time press the **SELECT** button to set the time zone offset. The seconds digits will stop flashing to indicate that the time zone offset has been set.

4.6.4.5. Enabling Daylight Saving Time Compensation

GENERAL
Time Setup
DST Active
<u>off</u>
on

This menu item allows the user to control whether Daylight Saving Time (DST) compensation will be applied to derive the local time.

When set to *off*, Daylight Saving Time compensation will not be applied.

When set to *on* Daylight Saving Time compensation will be applied and the local time will be adjusted back by 1 hour.



The 7825DSK2-LG-HD must be manually changed from Daylight Saving time to Standard time using this menu setting. If you want to automatically keep the time clock in the 7825DSK2-LG-HD in sync with the correct local time, connect a source of linear time code that contains local time to the LTC IN connector. See section 4.6.4.6

4.6.4.6. Selecting Whether the Time Code input is UTC or Local Time

GENERAL
Time Setup
LTC Time Zone
<u>Local</u>
UTC

This menu item allows the user to select whether incoming time code will be in UTC or local time. This information is necessary to correctly update the RTC clock from the time code.

Select *Local*, when the incoming LTC is local time.

Select *UTC*, when the incoming LTC is Universal Coordinated time.

4.6.4.7. Synchronizing the Real Time Clock to the UTC Time

GENERAL
Time Setup
Jam RTC from UTC
SELECT=Confirm

The hardware real time clock (RTC) will drift slightly from the video rate UTC Clock time under normal operation. When this drift exceeds 5 seconds the RTC will be automatically resynchronized to the UTC time. This menu item allows the user to synchronize the RTC to the UTC Clock time immediately.

To synchronize the RTC time immediately, press the **SELECT** button when RTC force jam is shown on the display. The front panel display will show RTC JAMMED for 1 second after the time has been synchronized.

4.6.4.8. Displaying the Local Date

GENERAL
Time Setup
LDate 00:12:30

This menu item is used to display the local date which is the UTC date adjusted by the time zone in yy:mm:dd format.

4.6.4.9. Displaying the UTC Date

GENERAL
Time Setup
UDate 00:12:30

This menu item is used to display the UTC date in yy:mm:dd format.

4.6.4.10. Setting the Real Time Date

GENERAL
Time Setup
RDate 00:12:30

This menu item is used to display and set the real time date in the keyer

When you press the **SELECT** button, the display shows the current real time date in yy:mm:dd format.

To set the date press the **SELECT** button and the year digits will begin flashing to indicate that they are in entry mode. Use the **↑** or **↓** pushbuttons to change the year to the desired value. Then press the **SELECT** button and the month digits will begin flashing to indicate that they are in entry mode. Set the month and day in the same way. When you have entered the correct date press the **SELECT** button to update the real time date. When you set the real time date, the UTC date will automatically be adjusted.



When there is a valid LTC input to the keyer with the date encoded in the userbits, the LTC date will overwrite the Real Time date that has been entered.

4.6.4.11. Setting the LTC Date Format

GENERAL
Time Setup
LTC Date Encode
Auto
Skotel

This menu item is used to select the format of the date encoded in the user bits of the LTC. For Skotel time code generators, choose *Skotel*. For all other time code generators choose *Auto*.

4.6.5. Setting Up the Network Addresses

The *Network Info* sub-menus of the *General Setup* menu are used to configure the 7825DSK2-LG-HD for FTP uploads of logos and other media. In most cases you will only have to plug in your Ethernet cable and configure the network IP address (A) to contain an unused IP address in the valid range. Entries are made in standard IP address format. Please consult your Network administrator for IP address allocations, netmask and gateway requirements.

To set the various *Network Info* parameters, press the **SELECT** button when the desired parameter is shown on the front panel display (indicated by the letter on the left side of the display). The left group of digits will be flashing to indicate that they are in entry mode. Use the **↑** or **↓** buttons to change this group to the desired value. Then press the **SELECT** button and the next group of digits will be flashing to indicate that they are in entry mode. Set the remaining groups of digits in the same way. When you have entered the correct value for the right group of digits, press the **SELECT** button to set the parameter. The display will stop flashing to indicate that the parameter value has been set.

The settings become active immediately after you return to the *Network Info* menu level. A reboot is not required.

4.6.5.1. Setting Up the IP Address

GENERAL
Network Info
A 196.168.1.1

This menu item sets the unique IP address of the 7825DSK2-LG-HD within the network. 192.168.1.XXX is an example of an IP address in a private (internal) network. If connecting multiple 7825DSK2-LG-HDs, take care not to use the same IP address for each.

4.6.5.2. Setting Up the Sub Net Mask

GENERAL
Network Info
M 255.255.255.0

This menu item sets the “subnet mask” of the network. Specifically, this parameter outlines all the IP addresses that can communicate with the 7825DSK2-LG-HD. This parameter is usually set to 255.255.255.0 for a private network.

4.6.5.3. Setting Up the Gateway

GENERAL
Network Info
G 192.168.1.1

This menu item identifies the IP address of the “gateway” (commonly referred to as the “firewall”). In its simplest sense the gateway could be the PC directly connected to the 7825DSK2-LG-HD and running the network application software (i.e. Overture™). In a private network, this gateway could be identified as 192.168.1.YYY.

4.6.5.4. Displaying the Ethernet Hardware Address

GENERAL
Network Info
0:2:C5:00:4F:7E

This menu item displays the Ethernet hardware address of the unit (which cannot be changed).

4.6.6. Displaying SNMP Trap Destination

GENERAL
SNMP Trap Dest
+ 0 .0. 0. 0

This menu item allows the user to configure an IP address for the trap destinations to be used in an SNMP agent.

4.6.7. Displaying AFD Logo Trigger

GENERAL
AFD Trigger
AFD code: off
AFD code:xxxx

This parameter allows the user to detect a particular AFD code in the HD VANC. The codes are based on SMTPE 2016.

This feature is only available in an HD video standard.

GENERAL
AFD Trigger
L:

This allows the user to specify the line from which AFD is decoded.

This feature is only available in an HD video standard.

GENERAL
AFD Trigger
Mode: <u>DSK</u>
Mode: Logo

This parameter allows the user to select what action will be taken when a trigger is received.

When set to *DSK* mode the downstream keyer will be turned on.

When set to *Logo* mode the logo that is specified will be turned on when a trigger is received.

This feature is only available on HD units.

4.6.8. Setting the Serial Protocol for COM Ports D and E

The three serial ports (COM C, D and E) and the breakout cable for the 7825DSK2-LG-HD are used for various functions. The SERIAL CONTROL (COM C) port and COM D ports are programmable and can be used for a variety of functions. The menu items for COM B, COM C, and COM D are the same. For simplicity, only one of these menu items will be shown in the manual. COM E is a virtual serial port that can also be configured the same way, but requires physical input from Ethernet. The external serial device has to be converted to Ethernet with a serial-to-Ethernet adapter. This device is only required if all the other ports are already in use.



Please note that COM A and COM B ports are for the serial console and Remote Configuration Panel respectively, and are not configurable.

GENERAL

COM D

<i>None</i> <i>Temperature</i> <i>Automation</i> <i>M2100_AUTO</i> <i>XY_AUTO</i> <i>Xenon Router</i> <i>Ten XL</i>

This menu item allows you to set the communications protocol that will be used on COM Port D.

Select *None* to disable the use of COM Port D

Select *Temperature* when you have the optional temperature probe connected to the port. See section 2.9 for more information about connecting the temperature probe. The temperature is displayed using a preformatted Temperature logo, which is created using Overture™ software. See the Overture™ manual for information on creating the Temperature logo.

There are three settings that are used when the 7825DSK2-LG-HD is under automation control. See your automation vendor for information about the protocols that are supported.

Select *Automation* when you want to control the 7825DSK2-LG-HD using the Evertz automation protocol. This is the setting you should use when you are controlling the 7825DSK2-LG-HD from the Evertz MetaCast 2 software.

Select *M2100-AUTO* when you want to control the 7825DSK2-LG-HD using the Grass Valley M2100 7825DSK2-LG-HD automation protocol.

Select *XY-AUTO* when you want to control the 7825DSK2-LG-HD using the xy logo inserter automation protocol. Note that only logo functions of the 7825DSK2-LG-HD can be controlled using the xy automation protocol.

Select *Xenon Router* when you want to control the 7825DSK2-LG-HD while using the Xenon Router.

Select the *Ten XL Control* when you want to control the 7825DSK2-LG-HD using a router.

4.6.9. Setting the Genlock Status

GENERAL

Genlock Status

<i>Ref is unlocked</i> <i>Ref is locked</i>
--

This menu item displays the status of the keyer in regards to genlock. The status will indicate whether the keyer is locked to reference or not.

4.6.10. Protecting Line 21 Captions

GENERAL
Line 21 Protect
L21 Prot: Yes
L21 Prot: No

This menu item allows the user to control logos that can be placed on line 21 where closed captions are located in North American television systems. When the video standard is set to one of the 625 line standards, the setting of this menu item is ignored.

When set to *Yes*, logos can be placed vertically beginning at line 22, preserving any closed caption information that is encoded on line 21.

When set to *No*, logos can be placed vertically beginning at line 21.

This feature is available when the unit is in SD video mode.

4.6.11. Setting the Unit Name

GENERAL
Unit Name
EVZx

This menu item allows the user to set the keyer unit name required when the 7825DSK2-LG-HD keyer is used in conjunction with a M2100 control panel. Each keyer connected to the panel must have a unique name assigned.

EVZ1 through EVZ8 are available. EVZ1 is the default.

4.6.12. Setting the Up Down Timer

GENERAL
Up Down Timer
Timer: Timer1
Timer: Timer2

This menu item selects which of the 2 timers the rest of the sub-menu items will affect.

Timer 1 is selected by default. To select Timer 2, press the **SELECT** button and use the ↓ pushbutton to scroll to *Timer2*, then press the **SELECT** button again.

GENERAL
Up Down Timer
Hour: 0

This menu item sets the hours for the timer. It can be set to values from 0 to 23 hours.

To change the value press the **SELECT** button then use the ↑ or ↓ pushbuttons to change the hours for the timer. Pressing **SELECT** again will set the value.

GENERAL
Up Down Timer
Minute: 0

This menu item sets the minutes for the timer. It can be set to values from 0 to 59 minutes.

To change the value press the **SELECT** button then use the ↑ or ↓ pushbuttons to change the minutes for the timer. Pressing **SELECT** again will set the value.

GENERAL
Up Down Timer
Second: 0

This menu item sets the seconds for the timer. It can be set to values from 0 to 59 seconds.

To change the value, press the **SELECT** button and then use the **↑** or **↓** pushbuttons to change the seconds for the timer. Pressing **SELECT** again will set the value.

GENERAL
Up Down Timer
Direction: Down
Direction: Up

This menu item sets the direction for the Timer.

To change the direction, press the **SELECT** button and then use the **↑** or **↓** pushbuttons to scroll through the options. Pressing **SELECT** button again will set the value.

4.6.13. Automation Debug Functions

Two automation debug functions are provided in the *GENERAL* menu. One is for the Evertz automation protocol and is called *Automation Debug*. The other is for the M2100 automation protocol and is called *M2100 Auto Debug*. Both work in essentially the same way. When you turn on one of the automation debug functions, the data packets being received from the automation system are output to the Upgrade RS-232 serial port. To view the data, use a terminal program with the following settings: baud rate: 57600, data bits: 8, parity: none, stop bits: 2, flow control: none.

These functions are used to view the commands that are being sent by the automation system. If you are having problems with a unit that is being controlled from automation, Evertz service personnel may ask you to provide a capture of the data being output on the serial port when the debug function is turned on.

GENERAL
Automation Debug
Off
On

This menu item sets the Automation Debug ON or OFF.

The OFF command is selected by default. To set the Automation Debug, press the **SELECT** button and then use the **↑** or **↓** pushbuttons to scroll through the options. Pressing the **SELECT** button again will set the value.

GENERAL
M2100 Auto Debug
Off
On

This menu item sets the M2100 Auto Debug ON or OFF.

The OFF command is selected by default. To set the M2100 Auto Debug, press the **SELECT** button and then use the **↑** or **↓** pushbuttons to scroll through the options. Pressing the **SELECT** button again will set the value.

4.7. FILE MANAGEMENT CONFIGURATION ITEMS

The 7825DSK2-LG-HD comes standard with a 1GB removable compact flash memory for storing logos and other media files. The *MANAGE FILES Setup* menu is used to set up various items related to moving logo files between these different media drives. Table 4-2 shows the items available in the *MANAGE FILES Setup* menu. Sections 4.7.1 to 4.7.5 provide detailed information about each of the sub-menus.

<i>Media</i>	Selects the source media for the file operation
<i>File</i>	Selects the media file for the file operation
<i>To</i>	Selects the destination media for the file operation
<i>Delete</i>	Deletes the media File from the Source media
<i>Format</i>	Erases the Destination media

Table 4-2: Top Level of the Manage Files Setup Menu

4.7.1. Selecting the Source Media

<i>MANAGE FILES</i>
<i>Media</i>
<i>[serial number]</i>

This menu item is used to select the source media drive that you are working with. Each media drive is identified by the serial number of the compact flash media that is currently in the drive. Units that are not fitted with one of the compact flash expansion drives will only have 1 item in this list.

Use the **↑** or **↓** buttons to display the serial number of the media that will be the source for the file operation and press the **SELECT** button.

4.7.2. Selecting the Media File Name

<i>MANAGE FILES</i>
<i>File: boot</i>
<i>[file name]</i>

This menu item is used to select the file name of the logo or other media file that you want to perform the file operation on.

Use the **↑** or **↓** buttons to display a list of all the media files on the drive selected with the *Media* menu item. When you have selected the desired media file press the **SELECT** button.

4.7.3. Selecting the Destination Media

MANAGE FILES
To
[serial number]

This menu item is used to select the destination media drive that you are working with. Each media drive is identified by the serial number of the compact flash media that is currently in the drive. Units that are not fitted with one of the compact flash expansion drives will only have 1 item in this list.

Use the **↑** or **↓** buttons to display the serial number of the media that will be the source for the file operation and press the **SELECT** button to choose the displayed item.

4.7.4. Deleting a File

MANAGE FILES
Delete

This menu item is used to delete the file specified by the *File* menu item from the source media (chosen by the *Media* menu item).

Press the **SELECT** button to initiate the delete function. If the file is active (i.e. the logo is being keyed), the delete function will fail.

4.7.5. Erasing all the Files from a Media Disk

MANAGE FILES
Format

This menu item is used to delete all the files from the source media (chosen by the *Media* menu item).

Press the **SELECT** button to initiate the format function. If there are active files on the media (e.g. one or more of the logo files are being keyed), the format function will fail.



Warning: this function is not recommended but is provided as last resort. The FORMAT function will completely remove all Media items, logos etc., from the device specified in the MEDIA sub-menu. There is no undo provided.

4.8. MATTE CONFIGURATION ITEMS

The 7825DSK2-LG-HD has a black overlay matte that blacks out video and produces a letterbox effect on the output video. The *MATTE Setup* menu is used to configure the black overlay matte that can be applied over the program video. Table 4-3 shows the items available in the *MATTE Setup* menu. Sections 4.8.1 to 4.8.3 provide detailed information about each of the sub-menus.

Matte On/Off
Aspect
Top
Bottom

Selects whether the matte is being keyed over the video or not

Sets the aspect ratio of the matte

Sets the last line of the top matte in user defined aspect ratio mode

Sets the first line of the bottom matte in user defined aspect ratio mode

Table 4-3: Top Level of the Matte Setup Menu

4.8.1. Turning the Matte On and Off

MATTE
Matte On/Off
Matte: Enable
Matte: Disable

This menu item is used to turn the matte on and off.

Select *enabled* to turn on the black matte overlay. This matte is on the top layer of the keyer and will overwrite all the video on the respective lines of the active picture. The matte does not blank the lines in the vertical interval.

Select *disabled* to turn off the black matte overlay.

4.8.2. Setting the Matte Aspect Ratio

MATTE
Aspect (user)
aspect: 1.33 *
aspect: 1.77
aspect: 1.85
aspect: 2.35
aspect: user

This menu item is used to set the aspect ratio of the matte.

There are three pre-defined aspect ratios available. When you select one of these aspect ratios the 7825DSK2-LG-HD will automatically set the *Matte Top* and *Matte Bottom* menu items.

In addition you can set a user defined aspect ratio by manually changing the *Matte Top* and *Matte Bottom* menu items. (See section 4.8.3.)

***Please note that aspect 1.33 is only available when the unit is in SD video mode.**

4.8.3. Setting a User Defined Matte Aspect Ratio

There are two menu items that allow the user to define custom aspect ratios for the matte. Selecting a pre-defined aspect ratio will lose any changes you have made to the *Matte Top* and *Matte Bottom* menu items unless they are stored using the user presets (see section 4.11). When you manually change the *Matte Top* and *Matte Bottom* settings the *Matte Aspect* will show the aspect ratio as *(user)*.

MATTE
Top
Top: x

This menu item is used to set the bottom line of the *Top* matte.

Use the **↑** or **↓** buttons to change the line number to the desired value. Either field 1 or field 2 lines can be used.

MATTE
Bottom
Bottom: x

This menu item is used to set the top line of the *Bottom* matte.

Use the **↑** or **↓** buttons to change the line number to the desired value. Either field 1 or field 2 lines can be used.

4.9. DOWNSTREAM KEYER CONFIGURATION ITEMS

The 7825DSK2-LG-HD has two downstream keyer layers that allow the user to key objects into the output video. The *DSK Setup* menu is used to configure the downstream keyer functions – key type, gain, and thresholds. The 7825DSK2-LG-HD has two DSK layers in which all of the controls are identical, therefore, for the sake of brevity only one DSK layer will be discussed. Table 4-4 shows the items available in the *DSK Setup* menu. Sections 4.9.1 to 4.9.5 provide detailed information about each of the sub-menus.



<i>Key Type</i>	Selects whether the DSK will perform a self key or use the supplied key and fill signals
<i>Key Gain</i>	Adjusts the transparency of the keyed object with respect to the key input
<i>Key Offset</i>	Shifts the base level for the entire range of colour values with respect to the key input
<i>Key Threshold</i>	Sets the level of the Fill signal where the self key will occur
<i>Auto Key Enable</i>	Selects whether automation can turn the Media layer ON and OFF

Table 4-4: Top Level of the DSK Setup Menu

4.9.1. Setting the Downstream Key Type

<i>DSK</i>	<p>This menu item is used to select whether the downstream keyer will use the key and fill input to perform the keying function or whether it will perform a self-key.</p> <p>Select <i>input</i> to use the key and fill inputs provided on the KEY and FILL video inputs of the 7825DSK2-LG-HD respectively.</p> <p>Select <i>self</i> to perform a hard self-key of the FILL video input using the FILL luminance threshold value set in the <i>Key Threshold</i> menu item.</p>
<i>Key Type</i>	
<i>Type: input</i> <i>Type: self</i>	

4.9.2. Setting the Downstream Key Object Transparency

<i>DSK</i>	<p>This menu item is used to modify the opacity (transparency) of the keyed object used in <i>input</i> key mode.</p> <p>Use the  or  buttons to change the <i>Key Gain</i> value. The default <i>Key Gain</i> value of 100 will leave the transparency of the keyed object unmodified from that defined by the key signal. Lowering the <i>Key Gain</i> value will reduce the opacity of the keyed object (i.e. make it more transparent). Increasing the <i>Key Gain</i> value will increase the opacity of the keyed object (i.e. make it less transparent).</p>
<i>Key Gain</i>	
<i>Gain: 100</i> <i>Gain: 50 to 170</i>	

4.9.3. Setting the Downstream Key Object Offset

DSK
Key Offset
Offset: 0
Offset: -4096 to 4095

This menu item is used to modify the key offset value used in *input* key mode. This value is the level that will be considered as black on the key input, and should not normally be changed from its default value of 0.

4.9.4. Setting the Downstream Self Key Threshold

DSK
Key Threshold
Thresh.: 4
Thresh: 4 to 1020

This menu item is used to modify the threshold value used in *Self Key* mode. The *Self Key* is a hard key based on the luminance value of the fill signal applied to the **FILL** video input. All luminance values that are above the *Key Threshold* will be keyed from the Fill signal. All values from the key that fall below the *Key Threshold* will be keyed from the background video.

The default value for the *Key Threshold* is 4, which is black.

4.9.5. Allowing Automation to Control the Media Layer

DSK
Auto Key Enable
Ctrl media: yes
Ctrl media: no

Some automation systems do not create a distinction between the Media layer (used for keying logos) and the Downstream Keyer layers. This control is provided to prevent the automation from turning the Media layer on and off at the same time as the DSK layers. Verify the functionality of your automation system before changing this menu item.



Please note that the Auto Key Enable control is not present of the DSK 2 Layer.

4.10. TRANSITION CONFIGURATION ITEMS

The 7825DSK2-LG-HD can transition between the video sources using a variety of standard transition types. The *TRANSITION Setup* menu is used to configure the transition type, rate, pause, and swap mode. Table 4-5 shows the items available in the *TRANSITION Setup* menu. Sections 4.10.1 to 4.10.5 provide detailed information about each of the sub-menus.

Transition Type	Selects the type of video transition
Transition Rate	Adjusts the rate of the video transition
Transition Swap	Selects whether the Program and Preview Buses will swap after the transition
Transition Pause	Selects whether the transition can be paused
Program Bus Change	Sets the transition type of a hot cut on the program bus

Table 4-5: Top Level of the Transition Setup Menu

4.10.1. Setting the Transition Type


TRANSITION

Transition Type

Type: Fade
 Type: Cut
 Type: Fade-Cut
 Type: Fade-Fade
 Type: Cut-Fade
 Type: Diamond Out
 Type: Diamond In
 Type: Circle Out
 Type: Circle In
 Type: Box Out
 Type: Box In
 Type: TB Split
 Type: LR Split
 Type: TB Curtain
 Type: LR Curtain
 Type: TR Box
 Type: TL Box
 Type: BR Box
 Type: BL Box
 Type: Wipe 315
 Type: Wipe 270
 Type: Wipe 225
 Type: Wipe 180
 Type: Wipe 135
 Type: Wipe 90
 Type: Wipe 45
 Type: Wipe 0

This menu item is used to select the type of transition that the user would like applied when the **TRANSITION** button is pressed. Transition effects only appear on the program output bus. Transitions on the preview output bus are always a Cut type performed at the end of the transition to program.

The numbers following the wipe patterns reference the angle of the wipe and direction of the wipe. Arrows indicate direction of wipe. For example, a *Wipe 45* transition will start a 45 degree wipe that will progress from the top left of the screen to the bottom right of the screen.

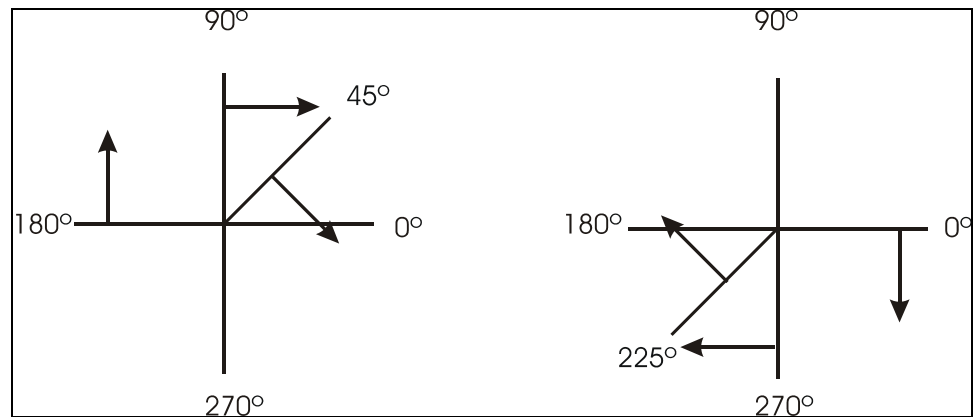

4.10.2. Setting the Transition Rate

TRANSITION

Transition Rate

Rate: 1 to 600

This menu item is used to set duration (time) of the transition. The duration is measured in frames.

Use the **↑** or **↓** buttons to change the *Transition Rate* value and press the **SELECT** button.

4.10.3. Setting the Transition Swap Mode

TRANSITION

Transition Swap

Swap: Swap
 Swap: No Swap

When set to *Swap* the input video and audio of the Preview Bus and the Program Bus will be swapped at the end of the transition. Logos and other media being keyed on the respective buses will also be swapped with the inputs.

When set to *No Swap* the input video and audio of the Preview Bus will be transferred to the Program Bus transition. Logos and other media being keyed on the Preview Bus will also be transferred to the Program Bus. The Preview Bus will remain unchanged.

4.10.4. Pausing a Transition

TRANSITION
Transition Pause
Pause: On
Pause: Off

This menu item is used to set whether the Transition can be paused.

When set to *On*, the transition may be paused by pressing the **TAKE** button while the transition is being performed. To continue the transition, press the **TAKE** button again.

When set to *Off*, the transition cannot be paused.

4.10.5. Setting Program Bus Change

TRANSITION
Program Bus Change
Switch: Clean
Switch: Hard

This menu describes the action when the user makes a “Hot cut” on the program bus. For instance, rather than selecting the next source on the Preset bus and then executing a transition, the next source will cut directly onto the Program bus.

When set to *Clean*, the audio and video transition will be a clean, smooth action.

When set to *Hard*, the audio and video transition will be a hard, abrupt action.

4.11. PRESET CONFIGURATION ITEMS

The 7825DSK2-LG-HD has 10 user presets that can store pre-defined configurations for such things as Matte settings, Transition settings and DSK settings. The parameter values stored are the menu settings that are currently based on the status of the Program Bus. Therefore, if you would like to store a preset that has a 2.35 matte applied, you must first configure the *Matte Aspect* and *Matte Enable* menu items, and then store the preset at one of the user preset addresses. When presets are recalled, the settings are recalled to the Preview Bus and will not show on the Program Bus until the **TRANSITION** button is pressed, or a GPI trigger invokes the transition.

The *PRESET Setup* menu is used to store and recall user presets as well as to configure the GPI and GPO functions. Table 4-6 shows the items available in the *PRESET Setup* menu. Sections 4.11.1 to 4.11.6 provide detailed information about each of the sub-menus.



After upgrading the 7825DSK2-LG-HD with new firmware, all presets should be recalled using the *Recall Preset* menu item, the values for new features must be set, and the preset must be saved again using the *Store Preset* menu item.

IF THIS IS NOT DONE, OLD PRESETS COULD BE RECALLED WITH UNDESIRABLE SETTINGS.

<i>GPI Setup</i>	Configures the actions triggered by the GPI inputs
<i>GPO Setup</i>	Configures the actions of the GPO outputs
<i>Store Preset</i>	Stores the Program Bus settings to 1 of the 10 user presets
<i>Recall Preset</i>	Recalls 1 of the 10 user presets to the Preview Bus
<i>Export Preset</i>	Exports 1 of the 10 user presets to the COM A port as ASCII text
<i>Preset Source</i>	Selects whether the settings of the Preview Bus or the Program Bus will be saved as a preset

Table 4-6: Top Level of the Preset Setup Menu

4.11.1. Configuring the GPI Inputs

The 7825DSK2-LG-HD is fitted with 8 general purpose inputs (GPIs) that can be configured to trigger 2 different actions - *On Closure* and *On Open*. For example, the *On Closure* event can be used to load a preset and perform a transition to the Program Bus. The *On Open* event for the same GPI can be used to load a different user preset and perform a transition to the Program Bus. For each event you can configure a preset to load, transition to perform and logo to display.

GPI can also be configured using GPI script files, which are text-based files that can be programmed and sent to your unit by Overture™. The syntax is important as the script represents programming code that will be executed when the allocated GPI trigger event occurs. There are 8 GPI inputs. Each input has 2 events: close and open. You can program scripts for each of these 16 events. If a script file is present on the flash file system then the unit will process the script when the event is triggered. If the script file is not present when a GPI event is triggered, then the internal GPI menu settings will be used.

The GPI script files are text files therefore they can be easily edited in notepad. See appendix 10 for more information on GPI scripting.

4.11.1.1. Selecting One of the GPI Inputs to Configure

<i>PRESET</i>	This menu item is used to select one of the GPI inputs that will be configured using the other menu items in the <i>GPI SETUP</i> menu branch.
<i>GPI Setup</i>	
<i>Configure GPI:A</i>	
<i>GPI=A to H</i>	
	When you first enter this menu branch the selected GPI input will be shown. To change to configuring another GPI input press the SELECT button. The display will show GPI=A indicating that the GPI input can be changed. Use the ↑ or ↓ buttons to select the GPI input you wish to configure and press the SELECT button. You can configure the preset to load, transition to make and logo to display when the selected GPI input is closed and opened using the other menu items in the <i>GPI SETUP</i> menu branch.

4.11.1.2. Configuring the GPI Actions

There are 4 menu items that configure the actions when the selected GPI closes (*CTransition*, *CLoad*, *CAction*, and *CLogo*). There are also 4 menu items that configure the actions when the selected GPI opens (*OTransition*, *OLoad*, *OAction*, and *OLogo*). For the sake of brevity only the *On Close* event menu items will be shown. The applicable GPI is shown on the left of the front panel display. Each GPI can be independently configured by first selecting the GPI using the *GPI* menu item described in section 4.11.1.1.

PRESET
GPI Setup
A CTransition
A CTransition: No
A CTransition: Ye

This menu item is used to select whether a transition will occur when the GPI is closed to ground.

If you do not want to perform a transition when the GPI is closed, select the *No* item.

Select *Ye* (yes) to perform a transition when the GPI is closed.

PRESET
GPI Setup
A CLoad Prest:NON
NON
1 to 10

This menu item is used to select the preset that will be loaded when the GPI input is closed to ground.

If you do **not** want to load a user preset when the GPI is closed, select *none* item. If *none* is selected then the existing settings will be used.

Select *1* to *10* to load a specific user preset when the GPI is closed.

PRESET
GPI Setup
A CAction
A CAction: NONE
A CAction: CUE
A CAction: IN
A CAction: OUT
A CAction: TOGGLE
A CAction: DUCK IN
A CAction: DUCK O
A CAction: DUCK
A CAction: ALL OU
A CAction: TIMER1
A CAction: TIMER2

This menu item is used to select the action that will occur when the GPI input is closed to ground.

Select *None* to not perform any action.

Select *Cue* to load the logo selected by the *CLogo* menu item into memory. The logo will not be displayed by this action.

Select *In* to load the logo selected by the *CLogo* menu item into memory and fade it in.

Select *Out* to fade out the logo selected by the *CLogo* menu item.

Select *Toggle* when the GPI is closed.

Select *DUCK IN* to begin a 'Duck Audio Insert'.

Select *DUCK OUT* to end a 'Duck Audio Insert'.

Select *DUCK* to toggle the state of the 'Duck Audio Insert'. If a 'Duck Audio Insert' is in effect it will be stopped or if a 'Duck Audio Insert' is not in effect it will be started. This function is useful if you want to use a momentary contact closure as opposed to a maintained contact closure to trigger a voice-over, but the disadvantage is that the current state of the voice-over is not guaranteed.

Select *All Out* to fade out all logos.

Select *TIMER1* or *TIMER2* to initiate a count up or count down function for a time logo.

PRESET
GPI Setup
A CLogo: (none)
None
List of logos

This menu item is used to select a logo to be acted on if the *CAction* menu item is set to *Cue*, *In* or *Out*

Select *None* to disable any logo actions.

Use the **↑** or **↓** buttons to select from the list of available logos and press the **SELECT** button to make this the active logo for the *CAction* menu item.

4.11.2. Configuring the GPO Outputs

The 7825DSK2-LG-HD is fitted with four contact closure general-purpose outputs (GPOs) that can be used as tallies for various functions. There are individual menu items to configure each of the GPOs. For simplicity, only the menu for GPO A will be shown.

PRESET
GPO Setup
GPO A
GPO A: <i>none</i>
GPO A: <i>Bypass</i>
GPO A: <i>Trans</i>
GPO A: <i>Vid C Inv</i>
GPO A: <i>Vid C Val</i>
GPO A: <i>Vid B Inv</i>
GPO A: <i>Vid B Val</i>
GPO A: <i>Vid A Inv</i>
GPO A: <i>Vid A Val</i>
GPO A: <i>Voice Ove</i>
GPO A: <i>Logo+Medi</i>
GPO A: <i>Media Sta</i>
GPO A: <i>Logo Stat</i>
GPO A: <i>DSK Statu</i>
GPO A: <i>Prog B</i>
GPO A: <i>Prog A</i>
GPO A: <i>Prog BLK</i>

This menu item is used to select the function of the GPO A general-purpose output. The output will be low when it is active.

Select *none* to disable the output.

Select *Bypass* to enable the bypass.

Select *Trans* to enable the transitions.

Select *Vid A- C Val* to indicate that the signal is present.

Select *Vid A - C Inv* to indicate that the signal is not present.

Select *Voice Ove* to activate the output when the voiceover on the program output bus is active.

Select *Logo+Medi* to make the GPO low when the media layer is turned on and a logo is being keyed on the Program bus.

Select *Media Sta* to make the GPO low when the media layer is turned on for the Program bus.

Select *Logo Stat* to activate the output when the media key layer on the program output bus is active.

Select *DSK Statu* to activate the output when the DSK layer on the program output bus is active.

Select *Prog BLK* to activate the output when the program output bus input is the internal black generator.

Select *Prog B* to activate the output when the program output bus input is **PGM IN B**.

Select *Prog A* to activate the output when the program output bus input is **PGM IN A**.

4.11.3. Recalling a User Preset

PRESET
Recall Preset
Recall # 1

This menu item is used to recall 1 of the 10 user presets to the Preview Bus.

Use the **↑** or **↓** buttons to select the preset to restore. When you press the **SELECT** button the preset will be restored to the Preview Bus overwriting the active preset. These settings will show on the Program Bus when the **TAKE** button is pressed, or a GPI trigger invokes the transition.

4.11.4. Storing a User Preset

PRESET
Store Preset
Store # 1

This menu item is used to store the Program Bus settings to 1 of the 10 user presets.

Use the **↑** or **↓** buttons to select which preset to save the settings to. When you press the **SELECT** button the settings will be saved overwriting any preset that was previously stored at that location.

4.11.5. Exporting a User Preset

PRESET
Export Preset
dump preset # 1

This menu item is used to send the settings to 1 of the 10 user presets to the console serial port (UPGRADE 232) as ASCII text. This function is useful in archiving the settings of the presets or for diagnostic purposes.

Use the **↑** or **↓** buttons to select the preset that you want to export. When you press the **SELECT** button the settings will be sent as ASCII text to the UPGRADE 232 serial port. To capture these settings you can use any terminal program such as HyperTerminal. Connect the computer using the instruction in section 9.3.2.1, and then use the Text capture function of your terminal program to save the ASCII text.

4.11.6. Selecting the Source of the Preset Settings

PRESET
Preset Source
<u>store program</u>
store preview

This menu item is used to select the source of the preset settings.

Select *store program* to use the Program Bus as the source of the preset settings.

Select *store preview* to use the Preview Bus as the source of the preset settings.

4.12. TEMPERATURE CONFIGURATION ITEMS

The 7825DSK2-LG-HD has the ability to insert a logo that displays the current local temperature. The *Temperature* setup menu is used to configure parameters relating to these types of logos. The following section provides detailed information about each of the sub-menu items:

<i>Temperature Source</i>	Configures the source of the temperature
<i>Temperature Format</i>	Configures the format of the temperature
<i>Set Temperature</i>	Sets the static temperature
<i>Temp Read Loss</i>	Configures the behaviour on the loss of the temperature source

4.12.1. Setting the Temperature Source

<i>Temperature</i>	This menu item is used to select the source of the temperature that will be displayed in temperature type logos.
<i>Temp Source</i>	
<i>Source: Probe</i>	Select <i>Probe</i> to take the temperature from the optional temperature probe.
<i>Source: Manual</i>	See section 2.9 for more information on using the temperature probe.
<i>Source: METAR</i>	Select <i>Manual</i> to manually set the temperature via the <i>Set Temperature</i> menu item.
	Select <i>METAR</i> to take the temperature from METAR data acquired via the Internet. See section 6.1.3 for more information on configuring the 7825DSK2-LG-HD to acquire METAR data.

4.12.2. Setting the Temperature Format

<i>Temperature</i>	This menu item is used to set the format of the temperature as set by the <i>Set Temperature</i> menu item.
<i>Temp Format</i>	
<i>Format: Fahrenheit</i>	Select <i>Fahrenheit</i> if the temperature entered is in degrees Fahrenheit.
<i>Format: Celsius</i>	Select <i>Celsius</i> if the temperature entered is in degrees Celsius.
	Note: This menu item is only used when the <i>Temp Source</i> menu item is set to <i>Manual</i> . When you create a temperature logo, you select the format as well. If, for example, you have created a temperature logo that is formatted for Celsius and you manually set the temperature in degrees Fahrenheit, the 7825DSK2-LG-HD will automatically convert the value to degrees Celsius so that the correct value is displayed in the logo.

4.12.3. Setting the Static Temperature

<i>Temperature</i>
<i>Set Temperature</i>
<i>Degree: 22</i>
<i>-600 to 600</i>

This menu item is used to set the temperature to be displayed in the temperature type logos when the *Temp Source* menu item is set to *Manual*.

Use the ↑ or ↓ pushbuttons to change the temperature value and press the **SELECT** button to set your desired temperature.

4.12.4. Temperature Read Loss

<i>Temperature</i>
<i>Temp Read Loss</i>
<i>Show: Blank</i>
<i>Show: Last Valid</i>

This menu item is used to set the behaviour when the temperature source is lost.

Nothing will be displayed if *Blank* is selected.

Selecting *Last Valid* will display the last valid temperature.

4.13. EAS CONFIGURATION ITEMS (+E OPTIONED UNITS ONLY)

4.13.1. TCP/IP

Alternately, the 7825DSK2-LG-HD can be configured to receive EAS messages and audio over TCP. The 7825DSK2-LG-HD firmware implements the DVS/168 protocol, referred to informally as EAS over TCP/IP. FTP is used to send text files to insert as crawls and WAV files to play as audio clips.

EAS over TCP/IP (EAS over Ethernet) is supported with Trilithic's EASy Plus box and DASDEC. For further details, refer to the step-by-step instructions in the Trilithic "EASyPlus" Setup Tech Note.

The *EAS Setup* menu is used to configure items related to the EAS option and is only available on units fitted with the option. Table 4-7 shows the items available in the *EAS Setup* menu. Sections 4.13.2 to 4.13.6 provide detailed information about each of the sub-menus.

<i>Type</i>	Selects how the EAS Crawl will transition onto the video
<i>Vert Pos'n</i>	Sets the vertical position of the EAS crawl
<i>Font</i>	Sets the font used to display the EAS crawl
<i>Font Height</i>	Sets the font size used to display the EAS crawl
<i>Rate</i>	Sets the crawl rate of the EAS crawl
<i>Warning BG</i>	Sets the colour of the background for EAS warning messages
<i>Warning FG</i>	Sets the font colour for EAS warning messages
<i>Watch BG</i>	Sets the colour of the background for EAS watch messages
<i>Watch FG</i>	Sets the font colour for EAS watch messages
<i>Test BG</i>	Sets the colour of the background for EAS test messages
<i>Test FG</i>	Sets the font colour for EAS test messages

Table 4-7: Top Level of the EAS Setup Menu

4.13.2. Setting the Vertical Position of EAS Crawl Display

EAS
Vert Pos'n
20
20 to 248

This menu item is used to set the vertical position of the EAS scrolling text message. The *Vert Pos'n* value is the video line where the top of the scrolling message will be placed. The range for placement is from 21 to 379 as set by the FCC rules.

When you first enter this menu branch the selected current position will be shown. To change the vertical position, press the **SELECT** button. The display will show *vert pos'n=21* indicating that the line number can be changed. Use the **↑** or **↓** buttons to select the line number and press the **SELECT** button. The display will show *vert pos'n:xx* indicating that this is the new display position.

4.13.3. Setting the Font used for the EAS Crawl Display

EAS
Font
Font Name

This menu item is used to set the font that will be used for the EAS scrolling text message.

When you first enter this menu branch the current font name will be shown. If there are no true type fonts loaded then the display will show *font* as the default font name. To change the font to another true type font press the **SELECT** button. The display will show *font=font* indicating that the font can be changed. Use the **↑** or **↓** buttons to select the from the available true type fonts that have been loaded using the Overture™ software. When you press the **SELECT** button the display will show *font:fontname* indicating that this is the new display font.

4.13.4. Setting the Font Size for the EAS Crawl Display

EAS
Font Height
10
10 to 200

This menu item is used to set the font size that will be used for the EAS scrolling text message.

The EAS height is the vertical size of the font measured in lines of video.

4.13.5. Setting the Crawl Rate for the EAS Crawl Display

EAS
Rate
16.0
1.0 to 60.0

This menu item is used to set the speed with which the scrolling text moves from right to left across the screen measured in samples per field.

The default is 16.0 samples. The parameter is adjusted in 0.1 sample increments.

4.13.6. Setting the Colours for the EAS Crawl Display

There are three different levels of EAS messages – warning messages, watch messages and test messages. Each message typically has a different background and foreground colour associated with it so that the viewer will immediately know the severity of the EAS alert. There are six menu items used to set the foreground and background colours. For the sake of simplicity only the menu item for setting the warning background colour will be shown in the manual. The other menu items are used in the same way.

EAS
Warning BG
R:255G:B 0 G: 0

This menu item is used to set the background colour for the warning messages. When you first enter this menu item you will be shown a set of colour values for each of the RGB colour components. The display will show a value similar to the following:

R:255G:B 0 G: 0

To change the colour value, press the **SELECT** button. The colon (:) after the R will change to an equals (=) sign indicating that you can change the R value. Use the **↑** or **↓** buttons to change the red colour component value. When you press the **SELECT** button the colon after the G will change to an equals sign indicating that you can change the G value. Proceed to set the G and B values in the same way. After changing the B value, press the **SELECT** button and the display will show a value similar to the following:

R:255G:B 128 G: 128

4.14. MEDIA CONFIGURATION ITEMS

The *MEDIA Setup* menu controls all the parameters for individual logos and audio clips. Table 4-8 shows the items available in the *MEDIA Setup* menu. Sections 4.14.1 to 4.14.3 provide detailed information about each of the sub-menus. Specific menu items apply to certain media types only.

To configure a specific logo exit the *Setup* menu and use the **↑** or **↓** buttons to select a particular media item. If you want to see the logo as you are positioning it then press the **LOGO IN/OUT** key to fade the logo in. The media key layer must be enabled for the output bus you are viewing in order for the logo to be visible. Press the **SETUP** button to enter the *Setup* menu. Navigate to the *Media* menu using the **↑** or **↓** buttons, then press the **SELECT** button to enter the *Media* menu. If the media key layer is active on the program output bus and the PGM BUS LOCK LED is ON, you will not be able to make changes to the logo settings.

<i>H</i>	Sets the horizontal position of the selected logo
<i>V</i>	Sets the vertical position of the selected logo
<i>Gain</i>	Sets the opacity (inverse of transparency) for the selected logo
<i>Fade In</i>	Sets the fade in duration for the selected logo
<i>Hold</i>	Sets how long the selected logo will be displayed
<i>Fade Out</i>	Sets the fade out duration for the selected logo
<i>UD Timer</i>	Configures the up down timer for the selected logo
<i>Rate</i>	Sets the crawl rate for the selected crawl logo
<i>Repeat</i>	Sets the repeat count for the selected crawl logo
<i>Pause</i>	Sets the pause time between repetitions of the selected crawl logo
<i>Font</i>	Sets the font used to display the text on the selected crawl logo
<i>Font Hei</i>	Sets the font size used to display the text on the selected crawl logo
<i>BG Opacity</i>	Sets the background opacity for the selected crawl logo
<i>FG Opacity</i>	Sets the font opacity for the selected crawl logo
<i>Crawl BG</i>	Sets the colour of the background for the selected crawl logo
<i>Crawl FG</i>	Sets the font colour for the selected crawl logo
<i>CL Repeat</i>	Sets the repeat count for the selected audio clip
<i>CL config</i>	Directs the customer to configure the audio clip through the HTML Setup page

Table 4-8: Top Level of the Media Setup Menu

4.14.1. Setting the Logo Horizontal Position

MEDIA
H
H:0
0 to max pixels

This menu item is used to set the horizontal position for the current logo. The position is referenced to the left edge of the logo. The range of values depends on video standard in use.

Use the **↑** or **↓** buttons to adjust the position. The logo will move on the screen as you adjust its position.

4.14.2. Setting the Logo Vertical Position

MEDIA
V
V:0
0 to max lines

This menu item is used to set the vertical position for the current logo. The position is referenced to the top edge of the logo. The range of values depends on the video standard in use.

Use the **↑** or **↓** buttons to adjust the position. The logo will move on the screen as you adjust its position.

4.14.3. Setting the Logo Transparency

MEDIA
Gain
Gain: 100%

This menu item is used to adjust the opacity (the inverse of transparency) of the logo as a percentage of the original opacity when the logo was created. When the *Logo Gain* is set at its default value of 100 the logo will be displayed at its original opacity.

For example, if the logo is created at 10% opaque, adjusting the *Gain* value to 200 will render the logo as 20% opaque. If the logo is created at 50% opaque, adjusting the *Gain* value to 200 will render the logo as 100% opaque. *Gain* values resulting in opacity levels above 100% are ignored.

Use the **↑** or **↓** buttons to adjust the *Gain* and then press the **SELECT** button to set the change.

4.14.4. Setting the Logo Fade In Duration

MEDIA
Fade In
Fade In: 30f

This menu item is used to set the fade in rate for the current logo. The range of values is 1 to 600 frames. The *Fade In* menu item only applies to static and crawl logos.

Use the **↑** or **↓** buttons to adjust the *Fade In* time and then press the **SELECT** button to set the *Fade In* time.

4.14.5. Setting the Logo Display Time

MEDIA
Hold
Hold: manual
Hold: 1 to 600f

This menu item is used to set how long the current logo will be displayed. The range of values is 1 to 600 frames. The logo will automatically fade out after the *Hold Time* has been completed. Setting the value to *manual* will cause the logo to be displayed until it is manually faded out. The *Hold Time* menu item only applies to static and crawl logos.

Use the **↑** or **↓** buttons to adjust the *Hold Time* and then press the **SELECT** button to set the *hold*.

4.14.6. Setting the Logo Fade Out Duration

MEDIA
Fade Out
Fade out: 30f

This menu item is used to set the fade out rate for the current logo. The range of values is 1 to 600 frames. The *Fade out* menu item only applies to static and crawl logos.

Use the **↑** or **↓** buttons to adjust the *Fade Out* time and then press the **SELECT** button to set the *Fade Out*.

4.14.7. Setting the Up Down Timer

MEDIA
UD Timer
UD Timer: None
UD Timer: Timer2
UD Timer: Timer1

The UD Timer (Up Down Timer) selects 1 of the 2 timers for the selected media.

The default for the UD Timer is *None*. To change the value press the **SELECT** button then use the **↑** or **↓** pushbuttons to scroll through the Timer options. Pressing **SELECT** again will set the value.

4.14.8. Crawl Logo Configuration Items (Crawl Optioned Units Only)

When the Crawl (+CLH) option is added to the 7825DSK2-LG-HD, it has the ability to key scrolling text messages over the program video. In order to set up the crawl logo and enter the text from the crawl logo you will need to use the Overture™ software. The crawl is rendered by Overture™ into a logo (EVL) file and sent to the 7825DSK2-LG-HD. See the Overture™ manual for more information on preparing crawl logos.

The *Media Setup* menu has several items that are used to configure crawl logos, and these items are only available when you select a crawl logo on units fitted with the crawl option. Sections 4.14.8.1 to 4.14.8.7 provide detailed information about each of the sub-menus.

4.14.8.1. Setting the Crawl Logo Horizontal Crawl Rate

MEDIA
Rate
Rate: 6
1 to 15

This menu item is used to set the speed with which the scrolling text moves from right to left across the screen measured in seconds per field.

For example, it will take 8 seconds for the text to scroll across a screen with a scroll rate of 8. This default value of 8 should provide a comfortable rate, however should you change the size of the font, you should also adjust the scrolling speed.

4.14.8.2. Setting the Crawl Logo Repeat Count

MEDIA
Repeat
Repeat: 0
0 to 30

This menu item is used to set the number of times that the text will scroll across the screen.

If you set the *Repeat* control to 0 the text will scroll continuously.

4.14.8.3. Setting the Crawl Logo Pause Time between Repeats

MEDIA
Pause
Pause: 0
0 to 30

This menu item is used to set the length of time (in seconds) before a new crawl begins. The pause time is measured between the time that the text disappears on the left side of the screen until it appears back on the right side of the screen.

4.14.8.4. Setting the Crawl Logo Text Font Size

MEDIA
Font Hei
Font Hei: 30
5 to 100

This menu item is used to set the font size that will be used for the crawl logo scrolling text message.

The *Crawl Height* is the vertical size of the font measured in lines of video.

4.14.8.5. Setting the Crawl Logo Text Font

MEDIA
Font
Font: font
Font=font

This menu item is used to set the font that will be used for the crawl logo scrolling text message.

When you first enter this menu branch the current font name will be shown. If there are no true type fonts loaded then the display will show *font* as the default font name. To change the font to another true type font, press the **SELECT** button. The display will show *font=font* indicating that the font can be changed. Use the **↑** or **↓** buttons to select from the available true type fonts that have been loaded using the Overture™ software. When you press the **SELECT** button the display will show *font:fontname*, indicating that this is the new the display font.

4.14.8.6. Setting the Crawl Logo Transparency

There are two menu items used to set the text (foreground) and background opacity (inverse of transparency) of the crawl logo. For the sake of simplicity, only the menu item for setting the background opacity will be shown in the manual. The other menu item is used in the same way.

MEDIA
BG Opacity
Bg Opacity: 0-255

This menu item is used to set the background opacity (the inverse of transparency) for the crawl logo.

Setting the opacity to 255 makes the background completely opaque.

Setting the opacity to 0 makes the background completely transparent.

4.14.8.7. Setting the Crawl Logo Colours

There are two menu items used to set the text (foreground) and background colours of the crawl logo. For the sake of simplicity, only the menu item for setting the background colour will be described in the manual. The other menu item is used in the same way.

<i>MEDIA</i>
<i>Crawl BG</i>
<i>R:255G:B 0 G: 0</i>

This menu item is used to set the background colour for the crawl logo. When you first enter this menu item you will be shown a set of colour values for each of the RGB colour components. The display will be similar to the following:

R:255G:B 0 G: 0

To change the colour value, press the **SELECT** button. The colon (:) after the R will change to an equals (=) sign indicating that you can change the R value. Use the **↑** or **↓** buttons to change the red colour component value. When you press the **SELECT** button the colon after the G will change to an equals sign indicating that you can change the G value. Proceed to set the G and B values in the same way. After changing the B value, press the **SELECT** button and the display will be similar to the following:

R:255G:B 128 G: 128

This indicates that the background colour value has been changed.

4.14.9. Audio Clip Configuration Items

The 7825DSK2-LG-HD has the ability to insert audio clips into the program audio path.

Please note that the 7825DSK2-LG-HD does not currently support playlists, and therefore the audio clips can only be played by themselves.

The *Media Setup* menu has a few items that are used to configure audio clips, and these items are only available when you select an audio clip.

4.14.9.1. Setting the Audio Clip Repeat Count

<i>MEDIA</i>
<i>CL Repeat:</i>
<i>CL Repeat:0</i>
<i>CL Repeat:1 to 100</i>

This menu item is used to set the number of times the audio clip will play.

If you set the *Repeat* control to 0 the audio clip will play continuously.

4.14.9.2. Audio Clip Configuration

<i>MEDIA</i>
<i>CL config:</i>
<i>CL config: HTML</i>

This menu points the user to configure the audio clip in the HTML Setup page.

This page left intentionally blank

CHAPTER 5
TABLE OF CONTENTS

5.	PLAYLIST COMMANDS.....	5-1
-----------	-------------------------------	------------

This page left intentionally blank

5. PLAYLIST COMMANDS

Playlist files are created in Overture Playlist Editor OMM allows the user to build these scripts, which are compiled as “.ekp” files. Playlist scripts encompass the playlist functionality of earlier releases (one logo/one animation plus one audio together) therefore they have the same file extension.

A user could create a playlist to bring in media (Media In), wait for a certain amount of time (Wait For), and then take the media out (Media Out). The combination of commands is defined by the end user's selections. Commands can appear more than once in the same playlist.

The following is a list of the playlist commands and a description of their functions:

Command	Description
Media Cue	Loads the specified media on the preview channel only.
Media In	Loads the specified media on the program channel.
Media Out	Removes the specified media from the preview and program channel.
Wait_For	Blocks execution of the next playlist item until the specified period of time elapses. Time can be programmed in fields, frames or seconds. For example, if the command stated “30 s 5 fr 1 fi” it would wait for 30 seconds plus 5 frames and one field
Wait For LTC	Blocks execution of the next playlist item until the specified timecode value has been reached.
Wait_media_in	Blocks execution until the referenced media finishes coming in.
Wait_media_out	Blocks execution until the referenced media finishes going out.
Udt_reload	Sets the referenced time (1 or 2) to its initial value.
Udt_start	Starts the timer counting.
Udt_stop	Stops the timer.
Run_after_reboot	With an argument of “true” will cause the script to run immediately after boot. It will wait until any referenced media is found (scanned) before execution begins. This can be used to bring in a logo after a power failure.
Rewind	Rewind to the start of the script and begin again. This will repeat the specified number of times (or forever with the argument 0).
Debug	Set to “on” or “off” to make the playlist print to the serial console each line as it executes.

GPI's can be configured to invoke playlist scripts. The user can set up a media name to associate with the open and close action. If you set the media name on a GPI configuration to a playlist script name, then that playlist script will run when the associated GPI is triggered. GPI scripts take precedence. For example, when the user opens a gpi n, it performs the following operation:

1. Is there a script called gpi-n-open? If so execute it.
2. If not, is there media associated with the GPI? If so, bring it in or out as configured. If that media is in fact a playlist script, then bringing it IN indicates that it will be "run".

CHAPTER 6

TABLE OF CONTENTS

6. HTML AUDIO SETUP PAGE	6-1
6.1. HTML SETUP PAGE.....	6-1
6.1.1. Main Index Page	6-1
6.1.2. Wav File Playout	6-4
6.1.3. METAR Setup Page.....	6-5
6.1.4. Reboot Page	6-6

Figures

Figure 6-1: Main Index Page	6-1
Figure 6-2: HTML Audio Setup Page	6-2
Figure 6-3: Metar Setup Page	6-5
Figure 6-4: HTML Reboot Page	6-6

This page left intentionally blank

6. HTML AUDIO SETUP PAGE

6.1. HTML SETUP PAGE

The Audio Setup for the 7825DSK2-LG-HD is configured through an HTML Setup page. The HTML Setup page also allows the user to configure the unit to acquire METAR data for use with temperature logos. You can access the HTML Setup page by launching your Internet browser and entering the IP address of the 7825DSK2-LG-HD in the address bar. The following sections provide a description of the features available on the HTML Setup page.

6.1.1. Main Index Page

After upgrading the unit, log into the HTML server and configure the audio settings. Type the IP address (i.e. 192.xxx.xxx.xxx) into the address line of a browser. This will open the device's Index page. A banner of the product model name and links to the Index, Audio Setup, METAR Server Setup and Reboot should be displayed in the window.

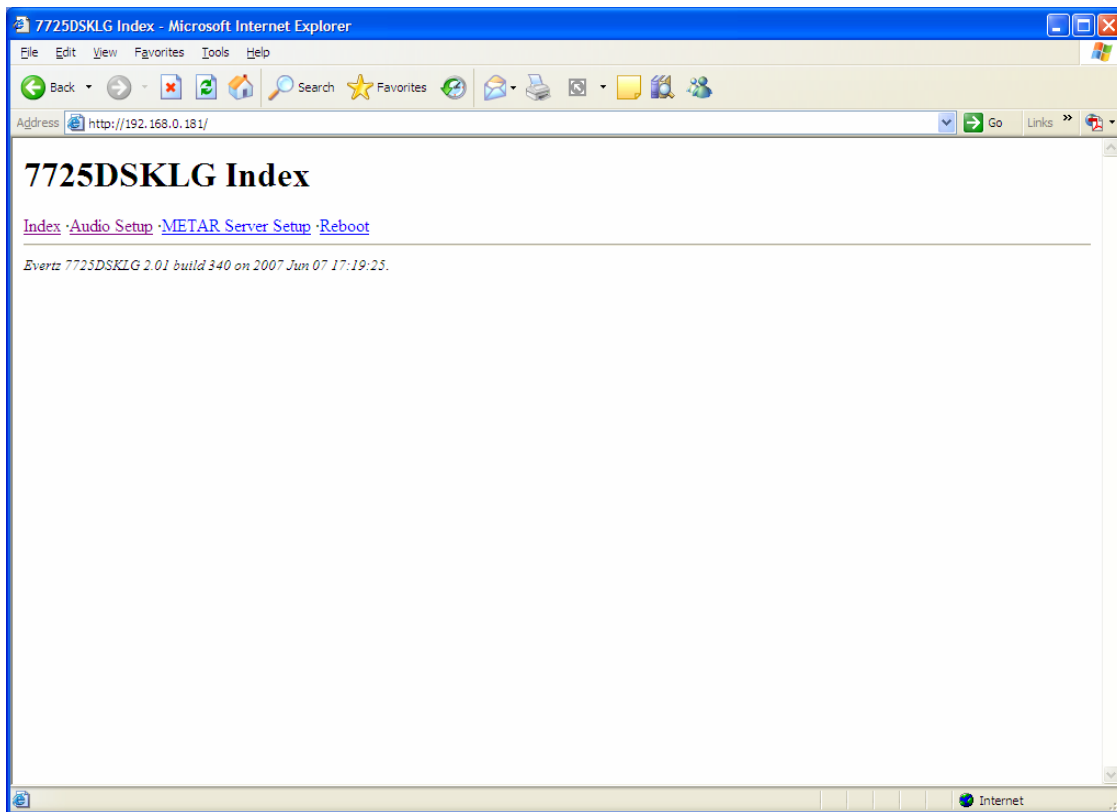


Figure 6-1: Main Index Page

If you select the Audio Setup button, a window similar to the following screen will be displayed:

7725DSKLG Audio Setup

[Index](#) · [Audio Setup](#) · [METAR Server Setup](#) · [Reboot](#)

Layer	Black		Bkg/A		Fill/B	
	Source	Gain (dB)	Source	Gain (dB)	Source	Gain (dB)
1L	AEMB1L	0.0	AEMB1L	0.0	BEMB1L	0.0
1R	AEMB1L	0.0	AEMB1R	0.0	BEMB1R	0.0
2L	AEMB1L	0.0	AEMB2L	0.0	BEMB2L	0.0
2R	AEMB1L	0.0	AEMB2R	0.0	BEMB2R	0.0
3L	AEMB1L	0.0	AEMB3L	0.0	BEMB3L	0.0
3R	AEMB1L	0.0	AEMB3R	0.0	BEMB3R	0.0
4L	AEMB1L	0.0	AEMB4L	0.0	BEMB4L	0.0
4R	AEMB1L	0.0	AEMB4R	0.0	BEMB4R	0.0

Layer	Audio Keyer			Audioclip			Voiceover		
	Source	Gain (dB)	Duck (dB)	Source	Gain (dB)	Duck (dB)	Source	Gain (dB)	Duck (dB)
1L	AEMB1L	0.0	0.0	CLIP1L	0.0	0.0	AEMB1L	-6.0	-6.0
1R	AEMB1L	0.0	0.0	CLIP1L	0.0	0.0	AEMB1L	-6.0	-6.0
2L	AEMB1L	0.0	0.0	CLIP1L	0.0	0.0	AEMB1L	-6.0	-6.0
2R	AEMB1L	0.0	0.0	CLIP1L	0.0	0.0	AEMB1L	-6.0	-6.0
3L	AEMB1L	0.0	0.0	CLIP1L	0.0	0.0	AEMB1L	-6.0	-6.0
3R	AEMB1L	0.0	0.0	CLIP1L	0.0	0.0	AEMB1L	-6.0	-6.0

Figure 6-2: HTML Audio Setup Page

LAYER: This represents the output audio channel for the embedded audio out.

BLACK: This column configures the audio that is used when the 7825DSK2-LG-HD is outputting black. The black function is only accessible via automation commands.

INPUT: This column configures the audio that is used when the 7825DSK2-LG-HD is passing the video, which is connected to the INPUT BNC connector. The 7825DSK2-LG-HD has 2 video inputs that can be used for extracting embedded audio. They are marked as **PGM IN A** and **PGM IN B** on the rear panel. The 7825DSK2-LG-HD can be set to activate these inputs on the preview or program output using the front panel buttons or automation control. The audio settings in the respective columns will be active when the output is set to these bus selections.

AUDIO KEYER: The gain settings boost the associated input audio channel and the duck affects the Bkg layer. The setting above is only active when the unit is in the DSK mode as indicated by the Front Panel LED bus selection. Switching to DSK mode can be executed through the front panel or automation control protocol.

AUDIOCLIP: This column configures which channel(s) the audioclip audio is to be inserted onto. Using this item you can also specify the desired mix levels for audio clips. The audioclip layer is on top of the Black/Bkg/Fill/Audio Keyer layers, therefore the gain settings boost the clip playout and the duck affects the Black/Bkg/Fill/Audio Keyer layer. The above setting provides for the audio clips (when playing) to output on all audio channels, the audio is mixed with the left and right channels of the pre-recorded audioclip. The left and right channels are then mixed with all the output audio channels. You must configure the audioclip layer in order to hear audio clips on the desired output channels. The logo layer must be enabled as indicated by the LED on the front panel in order for audio clips to be mixed. If the logo layer is off, audio clips will play out in memory, but they will not be mixed with the output audio. The audioclip layer is only active when an audioclip is playing out. EAS over TCP messages are played according to the audio clip settings, since the audio is transferred to the keyer as a wav file and played as a normal audio clip.

VOICEOVER: This column is used to configure the input source, which is to be used for voice overs as well as the output channel(s), which the voice over audio is to be inserted into. You can also specify the desired mix levels for voiceovers here.

SOURCE: Specifies the input source for the output audio channel. The following is a description of each of the choices.

- AEMB1L** - group 1 channel 1 of embedded audio on the input video
- AEMB1R** - group 1 channel 2 of embedded audio on the input video
- AEMB2L** - group 1 channel 3 of embedded audio on the input video
- AEMB2R** - group 1 channel 4 of embedded audio on the input video
- AEMB3L** - group 2 channel 1 of embedded audio on the input video
- AEMB3R** - group 2 channel 2 of embedded audio on the input video
- AEMB4L** - group 2 channel 3 of embedded audio on the input video
- AEMB4R** - group 2 channel 4 of embedded audio on the input video
- AEMB1M** - mono mix of group 1 channels 1 + 2 of embedded audio on the input video
- AEMB2M** - mono mix of group 1 channels 3 + 4 of embedded audio on the input video
- AEMB3M** - mono mix of group 2 channels 1 + 2 of embedded audio on the input video
- AEMB4M** - mono mix of group 2 channels 3 + 4 of embedded audio on the input video
- Silence** - the output audio channel will contain silence

GAIN: Sets the output gain for the audio channel in question. To pass the audio through at the received level, set the gain to 0. To boost the audio level, set the gain to a positive value. To reduce the audio level set the gain to a negative value.

DUCK: Sets the gain for the program audio when an audio mix is in effect. To pass the background audio through at the received level, set the duck to 0. To boost the background audio level set the duck to a positive value. To reduce the background audio level set the duck to a negative value.

NON-PCM: Selects whether the embedded audio is PCM. If the audio is PCM, set Non-PCM to No. If the audio is not PCM, such as Dolby-E, set Non-PCM to Yes.

Once the unit is set up as per the above specification, select the *Submit* button to send the configuration to the unit.

The *Update* button captures the changes from the unit that may be applied by GPIs or Automation control and displays the results in the HTML Setup page.

The *Revert* button, removes any changes that were applied but not submitted.

6.1.2. Wav File Payout

Wav files must either be 48KHz 16bit Stereo uncompressed audio, or 8KHz 8 bit Mono uncompressed audio. The Audioclip layer is on top of the Black/Bkg/Fill/Audio Keyer layers, therefore the gain settings boost the clip payout and the duck affects the active layer of the Black/Bkg/Fill/Audio Keyer layer. The setting above provides for the audio clips (in play mode) to output on all audio channels, the audio is mixed with the left and right channels of the pre-recorded audio clip. The left and right channels are then mixed with all the output audio channels. The audioclip layer must be configured in order to hear audio clips on the desired output channels. The logo layer must be enabled as indicated by the LED on the front panel in order for audio clips to be mixed. If the logo layer is OFF, audio clips will play out in memory, but they will not be mixed with the output audio. In the above example the active audio is lowered by 24dB when a clip plays, and the clip level is raised by 6dB. The audio clip layer is only active when an audio clip is playing out.

Audio clips and logos are treated exactly the same in the media keyers. The naming conventions for both the audio clips and logos are the same.

Alphanumeric can be used for logos and audio clips, however the M2100/Quartz and XY protocol only support numeric file names. If you are controlling them from automation, the logos and audio clips must be numerically named following the protocol of 2 digits (i.e. 01 02, etc).

6.1.3. METAR Setup Page

METAR is widely used in the aviation industry to obtain meteorological data from airports. The 7825DSK2-LG-HD can extract the temperature from the data and use it for temperature logos. Use of this feature requires a connection to the Internet.

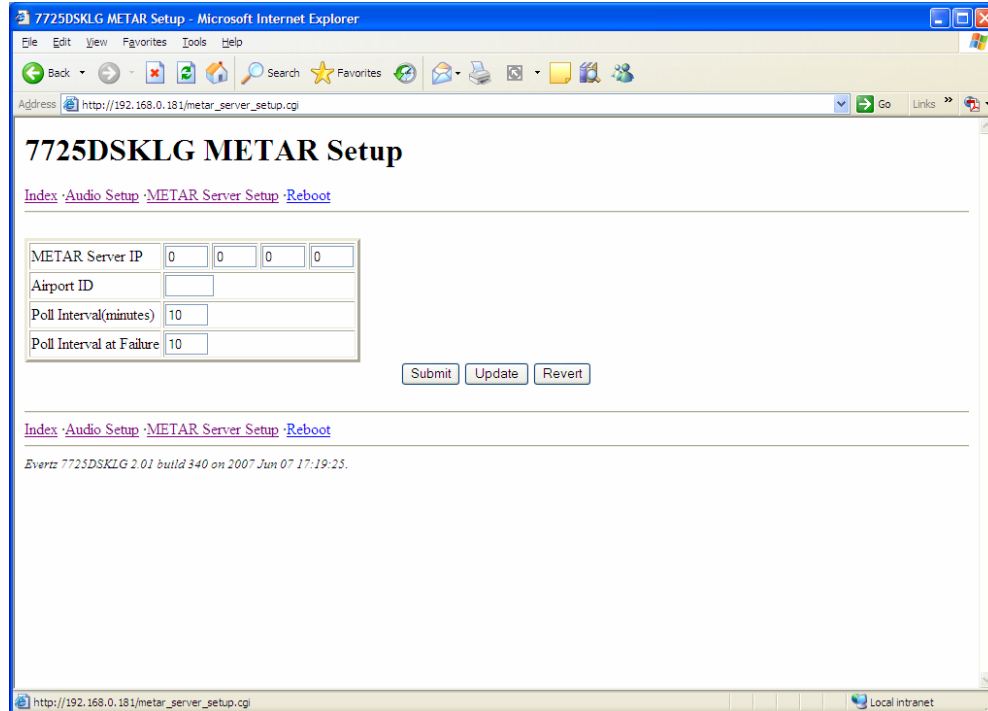


Figure 6-3: Metar Setup Page

METAR SERVER IP: Enter the IP address of the desired METAR server. A known IP address for one METAR server is 140.90.128.71.

AIRPORT ID: Enter the airport code for the desired airport from which to obtain the temperature. The *Airport ID* must be entered in all upper case letters.

POLL INTERVAL: Enter how often you would like the 7825DSK2-LG-HD to obtain the temperature. Temperature logos will be immediately updated each time the temperature is retrieved from the METAR server.

POLL INTERVAL AT FAILURE: Enter the desired length of time the 7825DSK2-LG-HD is to wait before trying to retrieve the temperature from the METAR server after a failed attempt.

6.1.4. Reboot Page

The reboot page allows the user to reboot the 7825DSK2-LG-HD remotely. After the Reboot button is selected, the unit will reboot. The user will have to refresh the HTML page after the unit has completed its reboot.

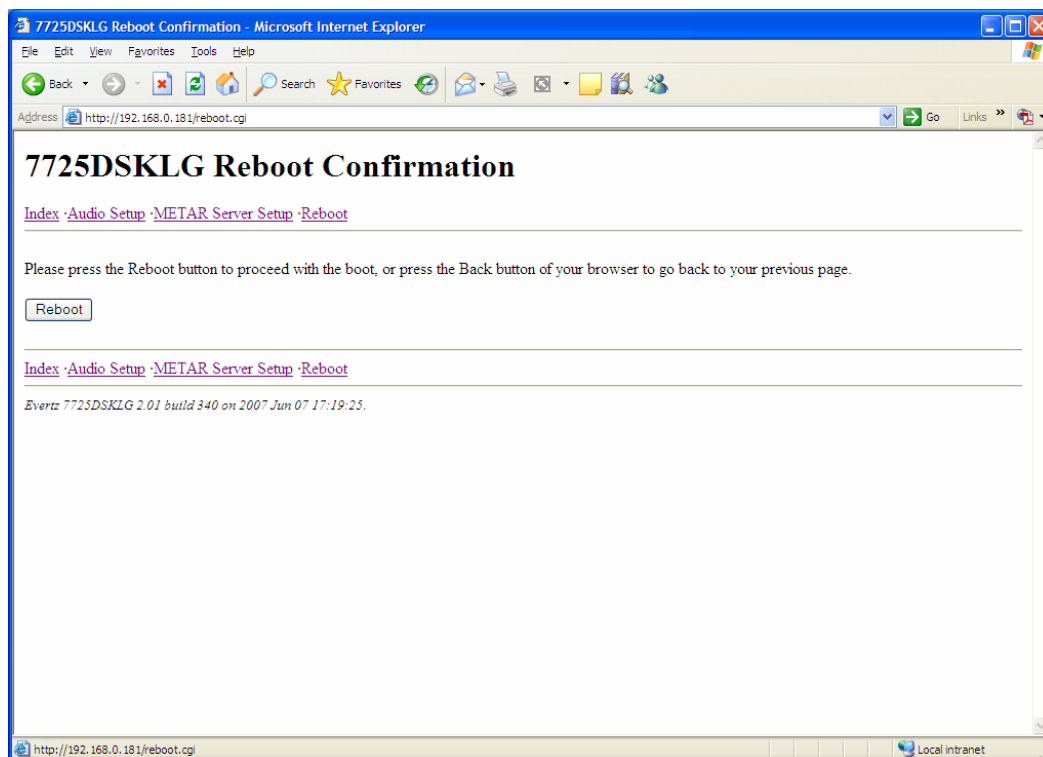


Figure 6-4: HTML Reboot Page

CHAPTER 7

TABLE OF CONTENTS

7. HOW TO OPERATE THE DOWNSTREAM KEYER USING THE DESKTOP CONTROL PANEL.....	7-1
7.1. AN OVERVIEW OF KEY AND DISPLAY FUNCTIONS.....	7-2
7.1.1. Output Bus Button Group.....	7-2
7.1.2. Transition Button Group.....	7-3
7.1.3. Function Button Group.....	7-4
7.1.4. Shaft Encoder Knobs	7-5
7.1.5. Setup Button Group	7-5
7.1.6. Control Panel Status Indicators	7-6
7.2. OVERVIEW OF DESKTOP CONTROL PANEL OPERATION.....	7-6
7.2.1. Displaying Logos.....	7-6
7.3. AN OVERVIEW OF THE SETUP MENU SYSTEM.....	7-6
7.3.1. Navigating the Setup Menu.....	7-6

Figures

Figure 7-1: 7825DSK2-LG-HD – Desktop Control Panel Layout	7-1
---	-----

This page left intentionally blank

7. HOW TO OPERATE THE DOWNSTREAM KEYER USING THE DESKTOP CONTROL PANEL

The 7825DSK2-LG-HD also supports 1RU desktop remote control panel. This chapter describes the operation of the 7825DSK2-LG-HD using the desktop remote control panel. For information about connecting the desktop remote control panel to the 7825DSK2-LG-HD see section 2.4.

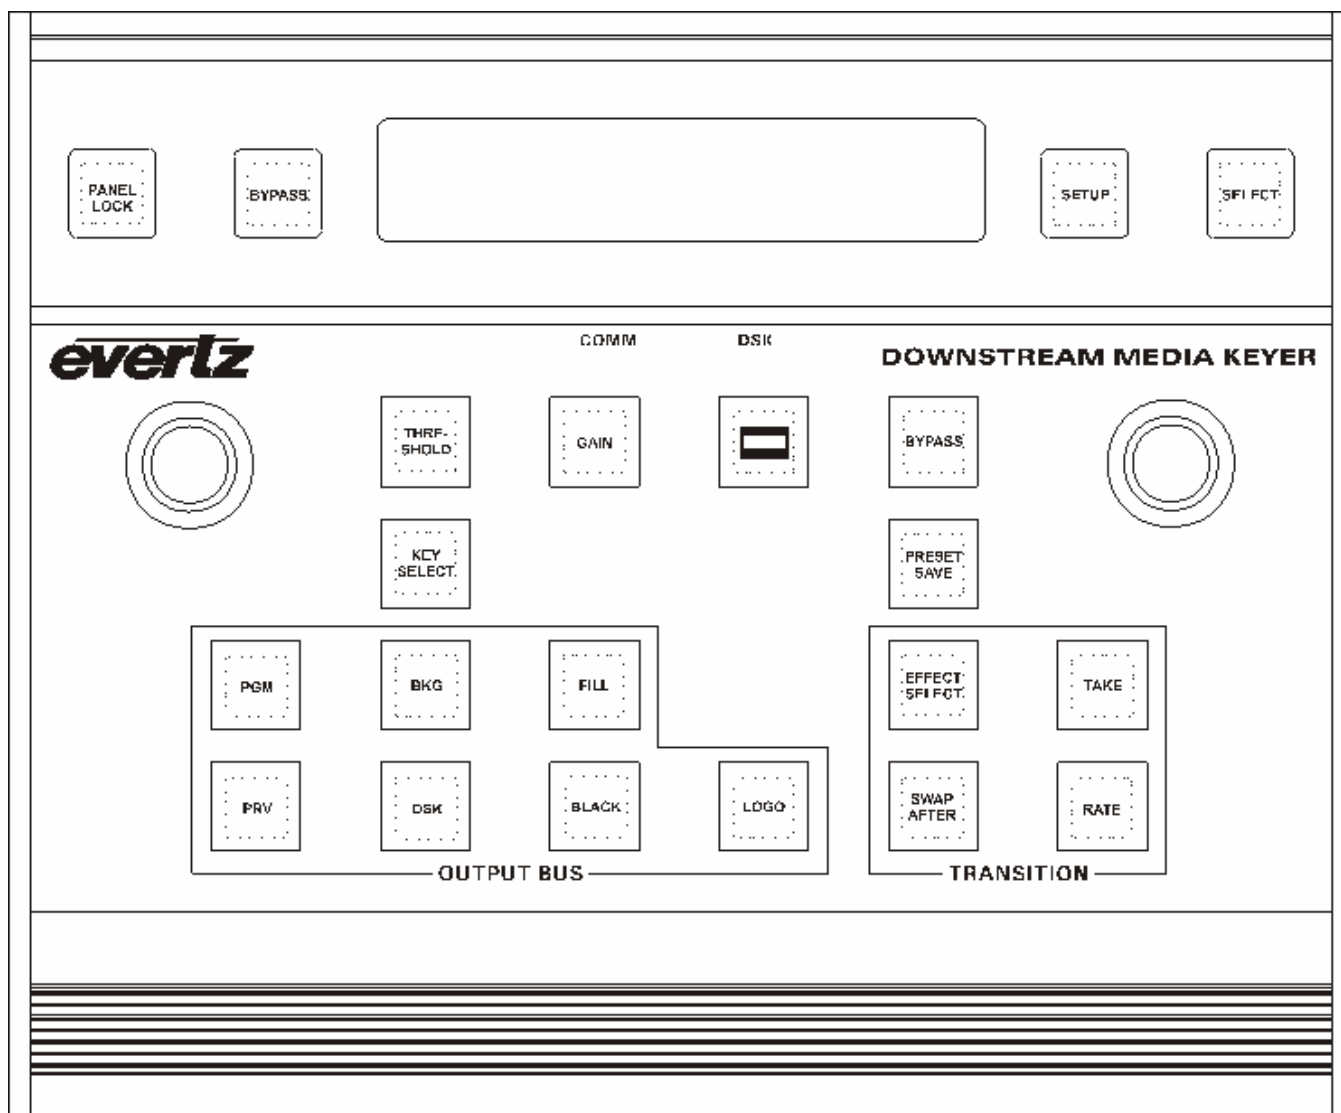


Figure 7-1: 7825DSK2-LG-HD – Desktop Control Panel Layout

7.1. AN OVERVIEW OF KEY AND DISPLAY FUNCTIONS

The Desktop panel controls consist of two shaft encoder knobs, a 16 digit alphanumeric display, and 25 illuminated buttons. The illuminated buttons will come ON to indicate that their controlled function is active.

The buttons are used to provide control of the 7825DSK2-LG-HD, to switch the various input sources, and to navigate the front panel *Setup* menu system, a quick and simple method of configuring the 7825DSK2-LG-HD Downstream Keyer for your application. See sections 4.3 to 4.14 for information on configuring the 7825DSK2-LG-HD using the *Setup* menu system.

7.1.1. Output Bus Button Group

PGM: This button sets the other buttons in the Output Bus button group so that they operate on the Program Bus. If the button LED is ON solid, then the **BKG**, **FILL**, **DSK**, **BLACK** and **LOGO** buttons are controlling the Program Bus. The LEDs in the **BKG**, **FILL**, **DSK**, **BLACK** and **LOGO** buttons will be ON solid if they are active on the Program Bus and flashing if they are active on the Preview Bus.

PRV: This button sets the other buttons in the Output Bus button group so that they operate on the Preview Bus. If the button LED is ON, then the **BKG**, **FILL**, **DSK**, **BLACK** and **LOGO** buttons are controlling the Preview Bus. The LEDs in the **BKG**, **FILL**, **DSK**, **BLACK** and **LOGO** buttons will be flashing if they are active on the Preview Bus and ON solid if they are active on the Program Bus.

BKG: This button selects the video from the **PGM IN A** input, as well as selecting the audio source. If the button LED is flashing then the **PGM IN A** video and associated audio is being output on the Preview Bus. If the button LED is ON solid then the **PGM IN A** video and associated audio is being output on the Program Bus. Selecting **BKG** deselects the **FILL**, **BLACK** and **DSK** buttons for the applicable bus. You can use the **PGM** and **PRV** buttons to toggle control/status between the two buses to verify the input status for each bus.

DSK: This button controls the downstream keyer layers for the selected output bus. If the button LED is not illuminated, then the downstream keyer layer is not active. If the button LED is flashing then the downstream keyer layer is enabled on the Preview Bus. If the button LED is ON solid then the downstream keyer layer is enabled on the Program Bus. Selecting **DSK** deselects the **BKG**, **FILL** and **BLACK** buttons for the applicable bus. You can use the **PGM** and **PRV** buttons to toggle control/status between the two buses to verify the downstream keyer layer status for each bus.

To control the downstream keyer layer, first select the bus you want the downstream key to appear on using the **PGM** and **PRV** buttons. To enable the downstream keyer layer on the selected output video bus, press the **DSK** button. The button LED will be illuminated (On Solid for Program Bus, flashing for Preview Bus). To disable the logo key layer from the selected output video bus, press the **DSK** button. The button LED will be OFF.

When the downstream keyer layer is enabled, the video present on the **FILL** video input is mixed with the background video (on the **PGM IN A or B**) based on the key signal provided on the **KEY** video input, or it can be self-keyed, using user defined thresholds. See section 4.9 for information about setting up the *DSK MODE* and other settings.

FILL: This button selects the video from the **PGM IN B** input, as well as selecting the audio source. If the button LED is flashing then the **PGM IN B** video and associated audio is being output on the Preview Bus. If the button LED is ON solid then the FILL/B video and associated audio is being output on the Program Bus. Selecting **FILL** deselects the **BKG**, **BLACK** and **DSK** buttons for the applicable bus. You can use the **PGM** and **PRV** buttons to toggle control/status between the two buses to verify the input status for each bus.

BLACK: This button selects the video from the built in Black generator. If the button LED is flashing then the Black video is being output on the Preview Bus. If the button LED is ON solid then the Black video is being output on the Program Bus. Selecting **BLACK** deselects the **BKG**, **FILL** and **DSK** buttons for the applicable bus. You can use the **PGM** and **PRV** buttons to toggle control/status between the two buses to verify the input status for each bus.

LOGO: This button controls the complete media key layer for the selected output bus. The media key layer includes the logo layer for the video and the voiceover layer for the audio. Logos cannot be displayed and voiceovers cannot be performed when the media key layer is off. If the button LED is not illuminated, then the media key layer is not active. If the button LED is flashing then the media key layer is enabled on the Preview Bus. If the button LED is ON solid then the media key layer is enabled on the Program Bus. You can use the **PGM** and **PRV** buttons to toggle control/status between the two buses to verify the downstream keyer layer status for each bus.

To control the media key layer, first select the bus you want the media key layer to appear on using the **PGM** and **PRV** buttons. To enable the media key layer on the selected output bus, press the **LOGO** button. The button LED will be illuminated (On Solid for Program Bus, flashing for Preview Bus). To disable the media key layer from the selected output video bus, press the **LOGO** button. The button LED will be OFF.

7.1.2. Transition Button Group

EFFECT SELECT: This button provides immediate access to the *Transition Type* menu item of the *TRANSITION* menu. See section 4.10.1 for more information on the *Transition Type* menu item. After pressing the **EFFECT SELECT** button you may use the shaft encoders to cycle through the Transition types available. Press **SELECT** to accept the changes or **SETUP** to escape without making any changes.

TAKE: This button starts a transition of what is displayed on the Preview Bus to the Program Bus. The transition *Type*, *Rate* and *Swap Mode* are set using the **EFFECT SELECT**, **RATE** and **SWAP MODE** buttons or using the menu items in the *Transition* menu item (see section 4.10). Transitions can also be triggered using GPI, or automation control (see section 4.11.5). The button LED indicates that a transition from the Preview Bus to the Program Bus is in progress when it is illuminated, regardless of how the transition was triggered.

SWAP AFTER: This button provides immediate access to the *Transition Swap* menu item of the *TRANSITION* menu. See section 4.10.3 for more information on the *Transition Swap* menu item. After pressing the **SWAP AFTER** button you may use the shaft encoders to choose *Swap* or *No Swap* mode. Press **SELECT** to accept the changes or **SETUP** to escape without making any changes.

When the *Transition Swap Mode* is set to *Swap* the input video and audio of the Preview Bus and the Program Bus will be swapped at the end of the transition. Logos and other media being keyed on the respective buses will also be swapped with the inputs.

When the *Transition Swap Mode* is set to *No Swap* the input video and audio of the Preview Bus will be transferred to the Program Bus transition. Logos and other media being keyed on the Preview Bus will also be transferred to the Program Bus. The Preview Bus will remain unchanged.

RATE: This button provides immediate access to the *Transition Rate* menu item of the *TRANSITION* menu. See section 4.10.2 for more information on the *Transition Type* menu item. After pressing the **RATE** button you may use the shaft encoders to cycle through the Transition rate range measured in video frames. Press **SELECT** to accept the changes or **SETUP** to escape without making any changes.

7.1.3. Function Button Group

KEY SELECT: This button provides immediate access to the *Key Type* menu item of the *DSK* menu. See section 4.9.1 for more information on the *Key Type* menu item. After pressing the **KEY SELECT** button you may use the shaft encoders to choose *Input* or *Self Key* DSK *Key Type*. Press **SELECT** to accept the changes or **SETUP** to escape without making any changes.

THRESHOLD: This button provides immediate access to the *Key Threshold* menu item of the *DSK* menu. This menu item is used to set the luminance value of the Fill signal that will be used to key the image when the *Key Type* is set to *Self Key*. See section 4.9.4 for more information on the *Key Threshold* menu item. After pressing the **THRESHOLD** button you may use the shaft encoders to cycle through the *Key Threshold* values. Press **SELECT** to accept the changes or **SETUP** to escape without making any changes.

GAIN: This button provides immediate access to the *Key Gain* menu item of the *DSK* menu. This menu item is used to adjust the transparency of the keyed image from the transparency of the Key signal when the *Key Type* is set to *Input*. See section 4.9.2 for more information on the *Key Gain* menu item. After pressing the **GAIN** button you may use the shaft encoders to cycle through the *Key Gain* values. Press **SELECT** to accept the changes or **SETUP** to escape without making any changes.

PRESET SAVE: This button provides immediate access to the *Store Preset* menu item of the *PRESETS* menu. This menu item is used to save the settings of the unit to one of ten user preset areas so they can be recalled later. See section 4.11.4 for more information on the *Store Preset* menu item. After pressing the **PRESET SAVE** button you may use the shaft encoders to select the preset number to save the settings to. When you press the **SELECT** button, the settings will be saved overwriting any preset that was previously stored at that location. Press **SETUP** to escape without saving the preset.

BYPASS: This button is used to operate the bypass relays in the 7825DSK2-LG-HD. When the bypass relays are in Bypass mode, the **PGM IN A** video input will be directly connected to the **PGM OUT**. The **PREV OUT** will not have any signals on them when the bypass relays are active. The button LED will turn ON when the bypass relays are in Bypass mode. Pressing the **BYPASS** button again will return the bypass relays to their normal mode and the button LED key will go OFF indicating that the video and audio signals are being processed by the 7825DSK2-LG-HD. The bypass relays will also operate in bypass mode if the 7825DSK2-LG-HD loses power preserving the output video and audio paths.

MATTE: This button allows the user to turn the black overlay matte on and off. See section 4.8 for more information on the *MATTE* menu which is used to configure the aspect ratio of the matte.

7.1.4. Shaft Encoder Knobs

SHAFT ENCODER: When the 7825DSK2-LG-HD is in one of the *Setup* menus, the **SHAFT ENCODER** knob is used to move to various items in the menu system or change a menu item's parameter value. (See also section 4.2)

When the 7825DSK2-LG-HD is not in one of the *Setup* menus, the **SHAFT ENCODER** knob is used to select logos and audio clips that are stored in the file system. When the desired logo or audio clip is shown on the display, press the **SELECT** button to fade in the logo or play the audio clip.

7.1.5. Setup Button Group

PANEL LOCK: This button is used to lock the control panel interface from accidental changes. The button LED will turn ON indicating that the control panel keys are disabled. When any of these buttons are pressed, the front panel display will show the message *Panel Locked* for a few seconds. Pressing the **PANEL LOCK** key again will return the front panel keys to their normal functions and the button LED key will go OFF indicating that the panel controls are enabled.

SETUP: This button is used to enter the *Setup* menu, which is used to configure the operating modes of the downstream keyer. (See section 4.2 for an overview of the *Setup* menu.) Once in the *Setup* menu, this button is used to back out of menu selections to the next higher menu level or to exit the *Setup* menu and return to normal panel operation.

SELECT: When in the *Setup* menu, this button is used to choose a sub-menu and navigate to the next level down in the menu structure. When you are at the bottom level of the menu system this button is also used to accept numeric values or to make the displayed menu choice the active value for that menu item.

When you are not in the *Setup* menu, this button is also used to fade logos in and out on the selected output bus.

SHAFT ENCODER: When in the *Setup* menu, the **SHAFT ENCODERS** are used to move to various items at the current menu level in the menu system. The **SHAFT ENCODERS** are also used to enter numeric parameter values at the bottom level of the menu system. Both **SHAFT ENCODERS** operate the same when you are in the menu system.

7.1.6. Control Panel Status Indicators

The illuminated buttons show operational status of the 7825DSK2-LG-HD at a glance. When they are on they indicate that the function associated with the button is active. The solid LED Output Bus buttons indicate the status for the Program output bus, and when the buttons are flashing the status of the preview output bus is indicated.

DSK: This LED indicates that the downstream keyer or media key layer is enabled on the Program Bus when it is ON. When it is OFF it indicates that the keyer layers are both disabled on the Program Bus.

COMM: This LED is used to signal two types of communication to the 7825DSK2-LG-HD. The LED flashing ON approximately every 1.5 seconds indicates that the control panel is communicating with the main microprocessor in the unit. When the 7825DSK2-LG-HD is under automation control, or logos or other media files are being transferred to or from the unit using the Overture™ software, the LED will be ON when the unit is receiving data from the control source.

If the LED is continuously OFF then the control panel has lost communications with the main unit. If this occurs and you are using a remote control panel, check the cabling to make sure it is correct. Otherwise the unit may require a reboot if the control buttons on the control panel are not responding.

7.2. OVERVIEW OF DESKTOP CONTROL PANEL OPERATION

7.2.1. Displaying Logos

To control whether a logo is keyed or not, you must first enable the media key layer by pressing the **LOGO** button for the bus you want the logo to appear on. The **LOGO** LED for the respective bus must be illuminated for logos to display on that bus (see section 7.1.1). Scroll to the logo required using the **SHAFT ENCODERS**. If the logo is currently being keyed its name will flash in the front panel display. To key the logo into the output video bus with the media layer enabled, press the **SELECT** button. The logo name display will be flashing. To remove a keyed logo from the selected output video bus, press the **SELECT** button. The logo name display will stop flashing.

7.3. AN OVERVIEW OF THE SETUP MENU SYSTEM

The *SETUP* menu system uses the 16 digit alphanumeric display and provides a quick, intuitive method of configuring the 7825DSK2-LG-HD. These items are often only required to be set up at installation time, and do not pertain to the day-to-day operation of the unit.

7.3.1. Navigating the Setup Menu

To enter the *Setup* menu, press the **SETUP** button. This will bring you to the main *Setup* menu where you can use the **SHAFT ENCODERS** to move up and down the list of available sub-menus. Top level menu items are shown in UPPERCASE. Once you have chosen the desired sub-menu, press the **SELECT** button to select the next menu level.

Once in a sub-menu, there may be another menu layer (shown in Title Case), or there may be a list of parameters to adjust (shown in lower case). If there is another set of menu choices, use **SHAFT ENCODERS** to select the desired menu item and press the **SELECT** button. Continue this process until you get to the bottom of the menu tree where the list of parameters to be adjusted is shown.

To adjust any parameter, use the **SHAFT ENCODERS** to move up or down the parameter list to the desired parameter. To view the possible values for that item, press the **SELECT** button. The current value for that parameter will be shown with an asterisk (*). Turning one of the **SHAFT ENCODERS** allows you to show the possible values for the selected parameter. The various parameter values that are not currently selected will NOT have an asterisk (*). When you have stopped at the desired value, press the **SELECT** button to save your selection. The value will be shown with an asterisk (*) indicating that it is now the current value. To move up one level in the menu press the **SETUP** button.

You can select other parameters from that sub-menu by using the **SHAFT ENCODERS**, followed by the **SELECT** button. Alternately you can move up one menu item by pressing the **SETUP** button.

When you have made all the desired changes, press the **SETUP** button one or more times until you return to the top of the Menu tree and exit the *Setup* menu.

Each of the menu items, with a function explanation, is described in sections 4.5 to 4.14.

This page left intentionally blank

CHAPTER 8

TABLE OF CONTENTS

8. TECHNICAL DESCRIPTION	8-1
8.1. SPECIFICATIONS.....	8-1
8.1.1. Serial Digital Video Input.....	8-1
8.1.2. Serial Digital Video Outputs	8-1
8.1.3. Video Reference	8-1
8.1.4. LTC Reader (on breakout cable)	8-1
8.1.5. Control (on breakout cable)	8-1
8.1.6. General Purpose Inputs and Outputs	8-2
8.1.7. Electrical	8-2
8.1.8. Physical.....	8-2
8.2. SLOT BLOCKER	8-3

Figures

Figure 8-1: Slot Blocker	8-3
--------------------------------	-----

This page left intentionally blank

8. TECHNICAL DESCRIPTION

8.1. SPECIFICATIONS

8.1.1. Serial Digital Video Input

Standard: 270Mb/sec SMPTE 259M-C, 525 or 625 line component
1.5Gb/sec SMPTE 292M

Number of Inputs: 2 Background, 2 Fill, 2 Key

Connector: BNC per IEC 61169-8 Annex A

Equalization: Automatic 300m @ 270 Mb/s, 100m @
1.5Gb/s with Belden 1694 or equivalent cable

Return Loss: > 15dB up to 1.5Gb/s

8.1.2. Serial Digital Video Outputs

Standard: Same as input

Number of Outputs: 1 Program, 1 Preview

Connectors: BNC per IEC 61169-8 Annex A

Signal Level: 800mV nominal

DC Offset: 0V \pm 0.5V

Rise and Fall Time: 750ps nominal

Overshoot: <10% of amplitude

Wide Band Jitter: 0.2 UI

8.1.3. Video Reference

Type: NTSC or PAL Colour Black 1 V p-p

Connectors: BNC per IEC 61169-8 Annex A

Termination: 75 Ω

Frame Genlock: REF1 or REF 2

8.1.4. LTC Reader (on breakout cable)

Standard: SMPTE 12M-1

Frame Rate: 25 and 30 Fps nominal

Connectors: 3 pin female XLR type connector

Level: 0.2 to 4V p-p, balanced or unbalanced

8.1.5. Control (on breakout cable)

Remote Panel Port: 9 pin female "D", RS-422 9600 baud, 8 bits, no parity
Remote control panel interface (only available on RCP or DCP versions)

Serial Control Port: 9 pin female "D", RS-232/422 8 bits, no parity, baud rate depends on
protocol

COM D Port:	9 pin female "D", RS-232/422 8 bits, no parity, baud rate depends on protocol
Selectable Protocol:	Automation, temperature probe interface
Ethernet Port:	RJ-45 100Base T Ethernet, TCP/IP, logo transfers, Virtual serial ports

8.1.6. General Purpose Inputs and Outputs

Number of Inputs:	8, programmable control functions
Number of Outputs:	4, programmable tally functions
Type:	Opto-isolated, active low
Connector:	15 pin female High-density D
Signal Level:	Pulled up to Vext supplied voltage 3.3V DC provided

8.1.7. Electrical

Voltage:	+12VDC
Power:	22W
EMI/RFI:	Complies with FCC Part 15 Class A, EU EMC Directive

8.1.8. Physical

7800 Multiframe

Number of Slots:	2 (use frame genlock REF 1 or REF 2 or backplate or input)
-------------------------	--

7700 Multiframe

Number of Slots:	3 (7825DSK2-LG-HD with fan attached, slot blocker installed, and only backplate genlock or input mode)
-------------------------	--

8.2. SLOT BLOCKER

The 7825DSK2-LG-HD series modules are designed to take two slots in the Evertz 7800FR frame. The 7800FR frame has higher per slot power ratings than the Evertz 7700FR-C. When a 7725DS series module is installed in the 7700FR-C, the module must occupy 3 slots to ensure that the frame power is managed properly. This is accomplished by installing the “Slot Blocker” on the bottom side of the board. If the “Slot Blocker” is not installed on the card and the card is inserted into the 7700FR, the card will not power-up. The “Slot Blocker” must be installed for the card to power-up in the 7700FR-C. When installing the card in a 7800FR, the “Slot Blocker” may be removed and it will power-up and operate normally. If the “Slot Blocker” remains installed and the card is inserted into the 7800FR, the card will also power-up and operate normally.

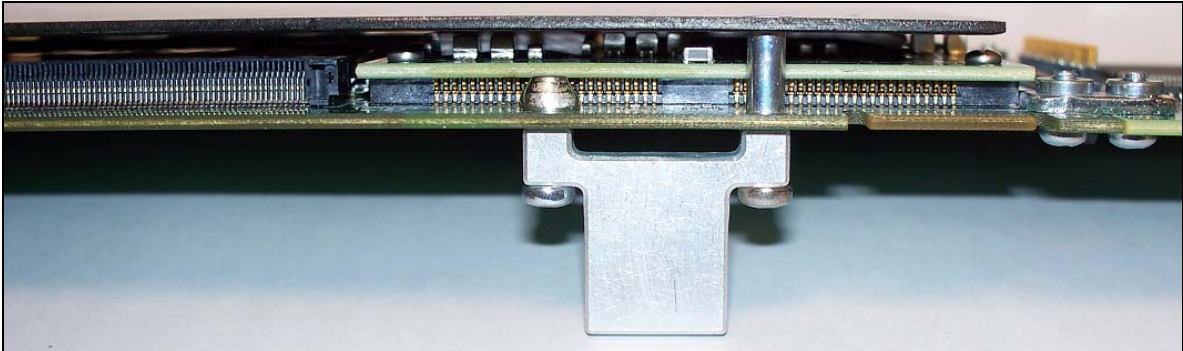


Figure 8-1: Slot Blocker

This page left intentionally blank

CHAPTER 9

TABLE OF CONTENTS

9. UPGRADING THE FIRMWARE.....	9-1
9.1. OVERVIEW	9-1
9.2. FIRMWARE UPGRADE VIA OVERTURE APPLICATION (RECOMMENDED PROCEDURE)	9-2
9.3. FIRMWARE UPGRADE VIA TERMINAL PROGRAM.....	9-3
9.3.1. Step 1: Transferring the File to the CF.....	9-3
9.3.1.1. Method 1: Using Overture 2	9-3
9.3.1.2. Method 2: Copy Using a CF Reader	9-4
9.3.2. Step 2: Serial Upgrade Procedure	9-4
9.3.2.1. Terminal Program Setup	9-4
9.3.2.2. Initiating Firmware Upgrade Mode from the Terminal Program	9-5
9.3.2.3. Uploading the New Firmware	9-6
9.3.2.4. Completing the Upgrade	9-7

Figures

Figure 9-1: Upgrading via Overture	9-2
Figure 9-2: Transferring File in Overture	9-4
Figure 9-3: 7700FC Boot Monitor	9-5
Figure 9-4: Second Stage Boot Loader	9-6
Figure 9-5: Main Menu.....	9-6

This page left intentionally blank

9. UPGRADING THE FIRMWARE

9.1. OVERVIEW

The firmware in the 7825DSK2-LG-HD is contained on a FLASH EPROM. Occasionally firmware updates will be provided to add additional features to the unit. The firmware update can be initiated using either the front panel, a terminal program or through the Overture™ software applications. The Overture™ based upgrade is the recommended method.

You will need the following equipment in order to update the Firmware:

- A PC with an available communications port. The communication speed is 57600 baud, therefore a 486 PC or better with a 16550 UART based communications port is recommended.
- “Straight-thru” serial extension cable (DB9 female to DB9 male).
- Terminal program that is capable of Xmodem file transfer protocol (such as HyperTerminal).
- Overture™ application (recommended).
- New firmware supplied by Evertz.
- Available Ethernet port
- Available serial port



After upgrading the 7825DSK2-LG-HD with new firmware, all presets should be recalled using the *Recall Preset* menu item, the values for new features must be set, and the preset must be saved again using the *Store Preset* menu item.

IF THIS IS NOT DONE, OLD PRESETS COULD BE RECALLED WITH UNDESIRABLE SETTINGS.

9.2. FIRMWARE UPGRADE VIA OVERTURE APPLICATION (RECOMMENDED PROCEDURE)

When updating firmware through Overture, Overture and the 7825DSK2-LG-HD communicate with each other through Ethernet. Using Overture to upgrade the firmware is the recommended procedure as it is a simple 1-Step Upgrade mechanism. Before you upgrade your unit, ensure that you are running Overture Suite 2. Please refer to the Overture Suite 2 manual for Overture installation and operation instructions.



If you are running Overture Version 1 then your upgrade will not work as it does not support the 1-step upgrade process.

1. When opening Overture 2, the Media Manager will have the device information listed in the *Configuration View*. If the device has not been added in Overture, right mouse click the *Devices* option in the Network panel. Select the *New Device...* option from the menu. Once the *New Device* window appears, enter a device name and the IP address, then select *OK*.
2. Select the newly created 7825DSK2-LG-HD device in the Network list and Right-click the mouse button.

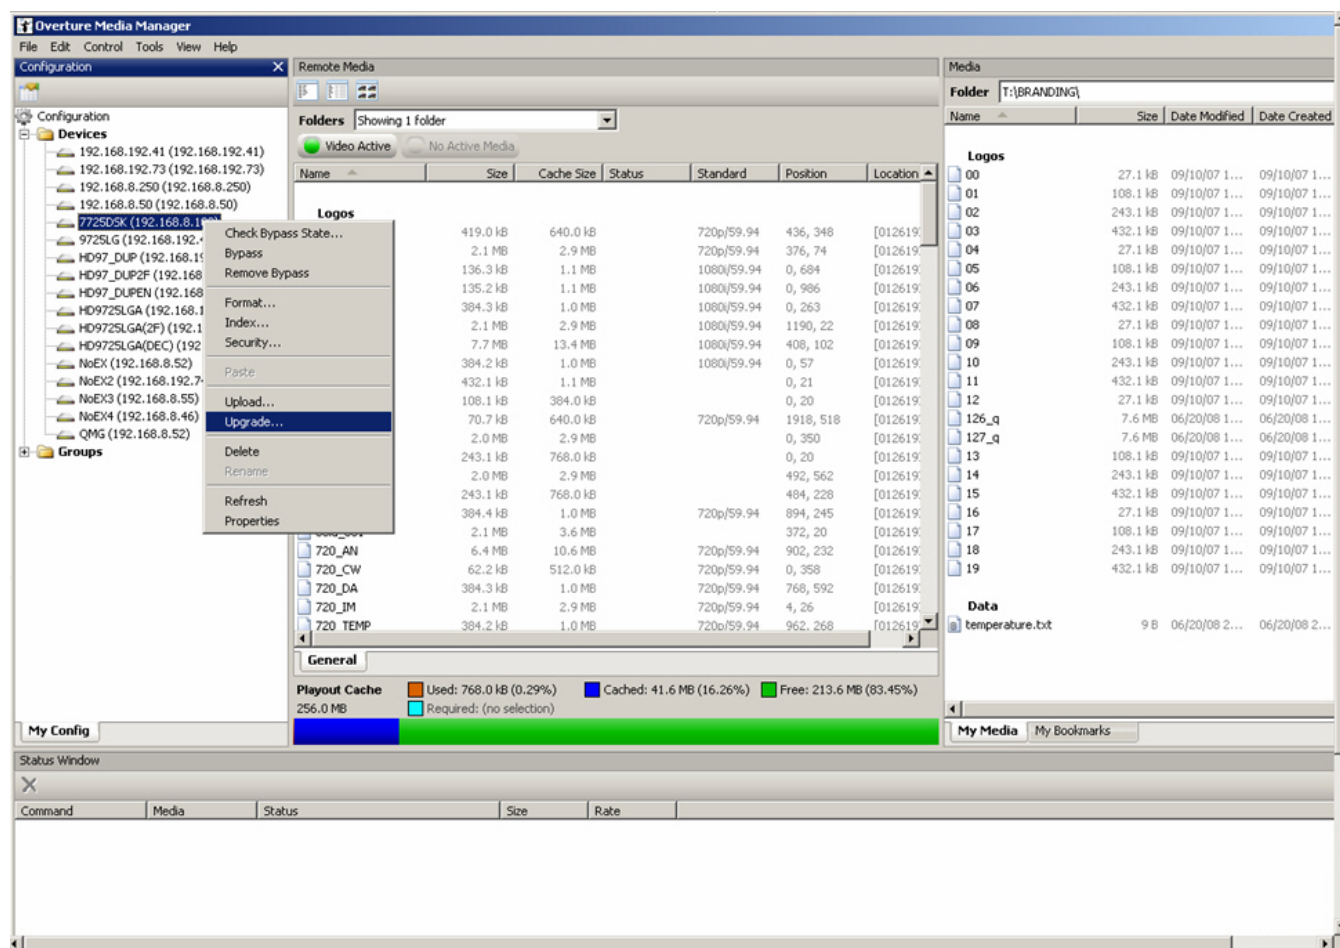


Figure 9-1: Upgrading via Overture

3. To upgrade the firmware, the user must select the **Upgrade...** button at the bottom of the drop down menu.
4. An upgrade window will appear. The user will then select the location of the BIN file required for the firmware upgrade. The bin file required will be "firmware_7825DSK2LG" for running HD and SD.
5. Click the "Open" button to start the firmware upgrade. In the console menu of Overture it will indicate the status of the firmware file being uploaded. When the upgrade process finishes, the unit will re-boot automatically.
6. Since the upgrade was performed using Overture Suite 2, the 7825DSK2-LG-HD will reboot automatically.

9.3. FIRMWARE UPGRADE VIA TERMINAL PROGRAM

Upgrading the firmware using the terminal program is a two step process.

9.3.1. Step 1: Transferring the File to the CF

The user must transfer a file called "firmware_7825DSK2LG" onto the Compact Flash (CF). The user can transfer this file in one of two ways.

9.3.1.1. Method 1: Using Overture 2

The user can transfer the "firmware_7825DSK2LG " file using Overture 2.

1. Navigate to the Compact Flash on the selected device to display the items located on the CF.
2. Navigate to the appropriate folder in the *Media* pane which contains the "firmware_7825DSK2LG " file.
3. To transfer the file to the compact flash, highlight the file from the *Media* pane and drag it into the *Remote Media* window.



Note: When "firmware_7825DSK2LG" file is transferred it will not be visible in the Remote Media pane of Overture, this is made intentionally to prevent the file from being deleted.

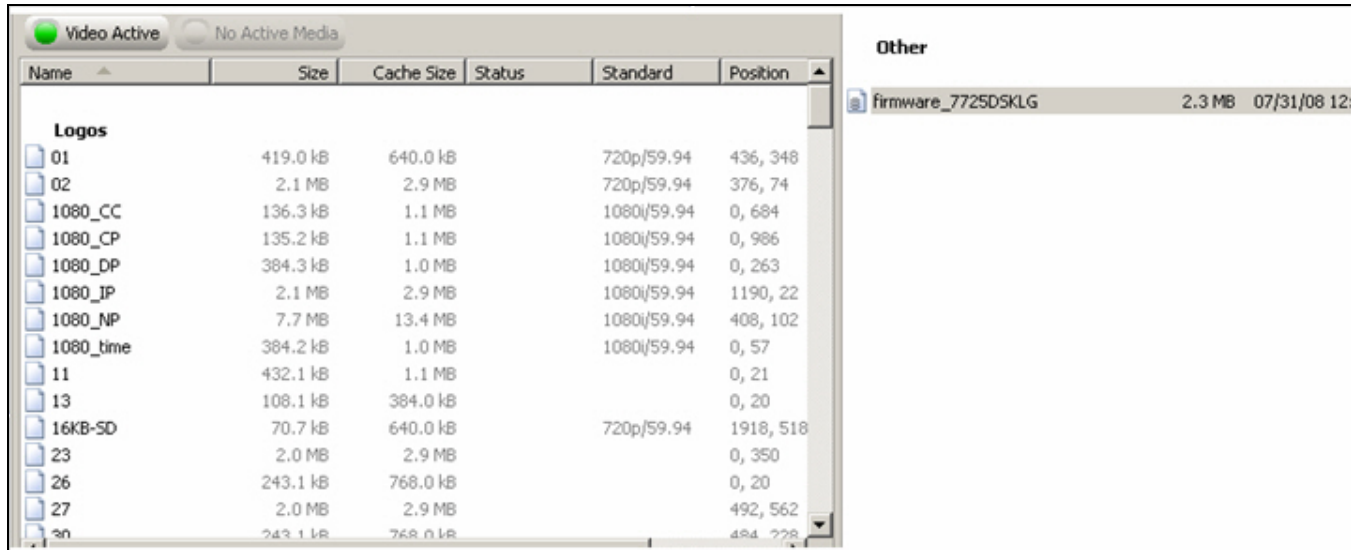


Figure 9-2: Transferring File in Overture

9.3.1.2. Method 2: Copy Using a CF Reader

The user can transfer the "firmware_7825DSK2LG" to the CF using a CF reader.

1. To transfer this file, remove the CF card from the 7825DSK2 and insert it into a CF reader. Once in the CF reader, copy the "firmware_7825DSK2LG" file.
2. Once the "firmware_7825DSK2LG" file resides on the CF, place the CF back in the 7825DSK2-LG-HD unit. The user can then proceed to step 2 (section 9.3.2).

9.3.2. Step 2: Serial Upgrade Procedure

9.3.2.1. Terminal Program Setup

1. In order to upgrade your unit serially, you will be required to download the hdsd7825dsk2lg_2v01_xxx.bin file (zipped file) from the Evertz website, which contains the following items:

- boot2.bin
- The firmware file is "firmware_7825DSK2LG"

The "firmware_7825DSK2LG" file is put onto the CF, and boot2.bin is applied using the "upgrade" command in the serial prompt.

2. When you are updating the keyer unit firmware, connect the rainbow cable (Evertz part # WA-S76) to the four pin connector on the front of the 7825DSK2-LG-HD module. Connect the other end of the rainbow cable to the serial connector.
3. Connect the 9 pin connector on the end of the serial update cable to the PCs' RS-232 communications port.
4. Start the terminal program.

5. Configure the port settings of the terminal program as follows:

Baud	57600
Parity	None
Data bits	8
Stop bits	2
Flow Control	None

5. Power up the unit.

9.3.2.2. Initiating Firmware Upgrade Mode from the Terminal Program

You may send commands to the keyer unit boot monitor in order to upgrade the application firmware.

6. Move the upgrade jumper into UPGRADE mode. Re-insert the card.
7. Power up the unit. After the unit powers up, user should hit CTRLX 5 times and a banner with the boot code version information should appear in the terminal window. The cursor to the right of the word "BOOT>" should be spinning. The user should now type in the word *upgrade*. Please refer to Figure 9-3.

For example:

```
EVERTZ 7700FC BOOT MONITOR
MON8240 1.1 BUILD 9
COPYRIGHT 2000 EVERTZ MICROSYSTEMS LTD. ALL RIGHTS RESERVED
UPGRADE JUMPER PRESENT
UPLOAD MAIN PROGRAM
```

```
EVERTZ 7700FC BOOT MONITOR.
MON8240 1.1 BUILD 9.
COPYRIGHT 2000 EVERTZ MICROSYSTEMS LTD. ALL RIGHTS RESERVED.
UPGRADE JUMPER PRESENT
UPLOAD MAIN PROGRAM
$↑↑B↑B0↑↑B↑B0↑
UPLOAD CANCELLED
ENTERING COMMAND LOOP
>
>
> upgrade
UPLOAD MAIN PROGRAM
$$$$$
```

Figure 9-3: 7700FC Boot Monitor

9.3.2.3. Uploading the New Firmware

8. You should now see a prompt asking you to upload the file. Please refer to Figure 9-3.
9. Upload the "boot2.bin" file supplied using the X-Modem transfer protocol of your terminal program. If you do not start the upload within 10 minutes the unit's Boot code will time out. You can restart the upgrade process by power cycling the unit.
10. After "boot2.bin" finishes loading a confirmation messages such as UPLOAD OKAY should appear and at this stage user should type in the word *boot*.

```
UPLOAD MAIN PROGRAM
$$$$
UPLOAD OKAY
> boot
```

11. After the user types in the word *boot*, the message displayed in Figure 9-4 will be displayed. The message is referring to the "firmware_7825DSK2LG" file that was transferred previously in step 1. This is a confirmation message. The user should press *enter* in order to continue loading the file.

```
*****
*****
This is the second stage boot loader:
Upgrade jumper is present:
To upload the keyer firmware file: "firmware_7725DSKLG" to the CF, use Overture.

To see the command menu, press Enter
*****
*****
```

Figure 9-4: Second Stage Boot Loader

12. Once the user presses *enter*, the following menu shown in Figure 9-5 will appear.

```
-----
|                               |
|           Main Menu          |
|        ( v2.01 b149)         |
|                               |
|-----|
(1) Network Configuration
(2) boot full firmware
(X) Exit
```

Figure 9-5: Main Menu

13. The user should type in the number 2 to initiate the unit to boot fully. The upgrade process will be completed and the unit will fully boot.

14. The following is a list of possible reasons for a failed upload:

- If you get the message "transfer cancelled by remote" you must restart the terminal program and load the bin file, then remove and install the module again.
- The supplied "*.bin" file is corrupt.
- Wrong file specified to be uploaded.
- Wrong file transfer protocol used – make sure you specify Xmodem, not Xmodem 1K.
- The PCs' RS-232 communications port cannot handle a port speed of 57600.
- Noise induced into the Serial Upgrade cable.

15. The following is a list of possible reasons for failed communications:

- Defective Serial Upgrade cable.
- Wrong communications port selected in the terminal program.
- Improper port settings in the terminal program. (Refer to step 4 for settings). Note that HyperTerminal will not change port settings while connected. Click on HyperTerminal's "Disconnect" Button then click the "Reconnect" button to activate changes to the port settings.

9.3.2.4. Completing the Upgrade

14. Remove the upgrade jumper and power cycle the card or frame. The unit should now reboot.

15. You can now close the terminal program and disconnect the RS-232 serial cable from the PC.

This page left intentionally blank

10. APPENDIX A

10.1. GPI SCRIPTING

GPI script files are text-based files that can be programmed and sent to your unit by Overture™. The syntax is important as the script represents programming code that will be executed when the allocated GPI trigger event occurs. There are 8 GPI inputs. Each input has 2 events: close and open. You can program scripts for each of these 16 events. If a script file is present on the flash file system the unit will process the script when the event is triggered. If the script file is not present when a GPI event is triggered, then the internal GPI menu settings will be used.

The GPI script files are text files, which can be easily edited using notepad.

The title of a script is used by the system to determine which GPI event this file is applicable to.

i.e. gpi-h-close, gpi-a-open

In this case, *gpi* states that the script will be running off the state of a GPI trigger. The *h* represents which specific GPI trigger the script will react to. GPI triggers range from A to H. *Close* shows that the script will run when the GPI is in a closed state.

In the programming language the script utilizes, a comment is represented by the symbol **#**. Any text that follows this symbol on a line of code will not execute a command or conduct any sort of action.

i.e. # this file describes the complete state of the keyer

CMD represents a command that is to be executed by the script when it runs.

i.e. cmd load_preset(1)

There are many different kinds of commands that can be run, and each command will perform a specific action when the script is run.

- **cmd load_preset(1):** This command will load preset 1.
- **cmd udt_start(1):** This command will start up/down timer #1.
- **cmd media_all_out():** This command fades out all logos and audio clips.
- **cmd media_cue("02.evl"):** This command will cue up logo "02.evl".
- **cmd media_in("03.evl"):** This command will fade in logo "03.evl".
- **cmd media_out("04.evl"):** This command will fade out logo "04.evl".
- **cmd media_toggle("05.evl"):** This command will toggle the state of logo "05.evl", if the logo is faded out it will be faded in, if it is faded in then it will be faded out.
- **cmd udt_stop(2):** This command will stop up/down timer #2.
- **cmd udt_toggle(1):** This command will toggle the start/stop state of the up/down timer #1, if the timer is started it will stop, if stopped it will start.
- **cmd udt_reload(2):** This command will reset up/down timer #2 to the timer start time.
- **cmd voiceover_enable():** This command will enable the voiceover function.
- **cmd voiceover_disable():** This command will disable the voiceover function.
- **cmd voiceover_toggle():** This command will toggle the state of the voiceover function, if

- the state is enabled it will be disabled, if disabled it will be enabled.
- **cmd transition("video"):** This command will enable a video transition setting the Preview Bus to the Program Bus using the transition settings specified either in the script or from the panel.
 - **cmd transition("audio"):** This command will enable an audio transition from the device.
 - **cmd transition("key,audio"):** This command will enable the DSK layer and enable an audio transition from the device.
 - **cmd transition("bg,audio"):** This command will transition the background video and audio.

The script can also direct the actions of channels coming from the device.

```
object bus_setup ("1") {  
object channel ("1L") {  
source = "AEMB1L" gain = 0 router = "1" }  
}
```

In this case, the script is telling the channel "1L" of input 1 that both its sources will come from the discrete input 1L of ABO 1 side A and the gain on will be 0.

Transition options are as follows:

- "Cut", mode_cut
- "Fade", mode_fade
- "BarWipeTopToBottom", mode_wipe_0
- "DiagonalWipeTopLeft", mode_wipe_45
- "BarWipeLeftToRight", mode_wipe_90
- "DiagonalWipeBottomLeft", mode_wipe_135
- "BarWipeBottomToTop", mode_wipe_180
- "DiagonalWipeBottomRight", mode_wipe_225
- "BarWipeRightToLeft", mode_wipe_270
- "DiagonalWipeTopRight", mode_wipe_315
- "BoxWipeBottomLeft", mode_wipe_blbox
- "BoxWipeBottomRight", mode_wipe_brbox
- "BoxWipeTopLeft", mode_wipe_tlbox
- "BoxWipeTopRight", mode_wipe_trbox
- "BarnDoorWipeVerticalClose", mode_wipe_lrcurt
- "BarnDoorWipeHorizontalClose", mode_wipe_tbcurt
- "BarnDoorWipeVerticalOpen", mode_wipe_lrsplit
- "BarnDoorWipeHorizontalOpen", mode_wipe_tbsplit
- "IrisWipeRectangleClose", mode_wipe_box_in
- "IrisWipeRectangleOpen", mode_wipe_box_out
- "IrisWipeCircleClose", mode_wipe_circle_in
- "IrisWipeCircleOpen", mode_wipe_circle_out
- "IrisWipeDiamondClose", mode_wipe_diamond_in
- "IrisWipeDiamondOpen", mode_wipe_diamond_out
- "CutFade", mode_cut_fade
- "FadeFade", mode_fade_fade
- "FadeCut", mode_fade_cut

Audio channel setups are handled as an object configuration:

```
object bus_setup ("1") {  
  object channel ("1L") {  
    source = "AEMB1L" gain = 0 router = "1" }  
  object channel ("2R") {  
    source = "Silence" gain = 0 router = "none" }  
  object channel ("4L") {  
    source = "AEMB4L" gain = 0 router = "12"}  
}
```

The values for the router property are "1", "2", ..., "12", "none". One router property is needed for each channel pair (the latter one overwrites the first if different router values are specified for both left and right channels).

This example sets the output audio channel 1L to the AES discrete input 1L, which is the first channel of the first AES BNC in the program BNC block on the rear of the unit. This input will be active whenever you select the Bkg/A from the front panel, gpi or automation. This will also be the source for the background audio when the unit is in DSK mode.

10.1.1. Scripting Object Syntax

```
object TYPE (name) {  
  object TYPE (name)  
  PROPERTY = value  
  command  
}
```



Note: 'obj' can be used in place of object

Defined TYPE

bus_setup
channel
router
transition
matte
key
audio
source
misc

Defined PROPERTY

pgm_source
PRV_source
key_source
fill_source
type
swap
rate
enable
top

bottom
source
router
mode
offset
threshold
gain
nonpcm
line21_protect
b_blanking

Individual object constructs

```
object bus_setup ("bus names")
{
object channel ("channel names")
{
source = "audio_source_name"
gain = "gain_db"
router = "1", ..., "12", "none"
nonpcm = "1" or "0"
}
}
```



Source, gain, and router do not have to be specified all in one object. Left and right channels are routed in pairs. As a result, the latter router definition for a pair overrides the earlier one if there is any.

nonpcm is not implemented in current version

bus names
"black"
"white"
"1", "2", "3", "4", "5", "6", "7", "8", "9", "10", "11", "12"

channel names
"1L", "1R", "2L", "2R", "3L", "3R", "4L", "4R"

audio_source_names
AES1L, AES1R, AES2L, AES2R,
AES3L, AES3R, AES4L, AES4R,
AES1M, AES2M, AES3M, AES4M,
EMB1L, EMB1R, EMB2L, EMB2R,
EMB3L, EMB3R, EMB4L, EMB4R,
EMB1M, EMB2M, EMB3M, EMB4M
Silence

```
object router()
{
pgm_source = "bus_name"
PRV_source = "bus_name"
key_source = "bus_name"
fill_source = "bus_name"
}
```



**Values for bus_name are the same as for object bus_setup.
key_source and fill_source are not implemented in the current version.**

```
object transition()
{
type = "transition type"
rate = "integer number of fields"
swap = "1" or "0"
}
```



Note: "1" to enable swap.

transition type
Cut, Fade,
BarWipeTopToBottom, DiagonalWipeTopLeft,
BarWipeLeftToRight, DiagonalWipeBottomLeft,
BarWipeBottomToTop, DiagonalWipeBottomRight,
BarWipeRightToLeft, DiagonalWipeTopRight,
BoxWipeBottomLeft, BoxWipeBottomRight,
BarnDoorWipeVerticalClose, BarnDoorWipeHorizontalClose,
BarnDoorWipeVerticalOpen, BarnDoorWipeHorizontalOpen,
IrisWipeRectangleClose, IrisWipeRectangleOpen,
IrisWipeCircleClose, IrisWipeCircleOpen,
IrisWipeDiamondClose, IrisWipeDiamondOpen,
CutFade, FadeFade, FadeCut

```
object matte()
{
enable = "1" or "0"
top = "integer number of lines"
bottom = "integer number of lines"
}
```



Note: "1" to enable matte.

```
object key ()
{
mode = "input" or "self"
offset = "integer offset"
threshold = "integer threshold"
}
```

```
object misc ()
{
line21_protect = "1" or "0"
b_blanking = "1" or "0"
}
```



Note: "1" to enable line 21 protect or b_blanking.

10.1.2. Scenario Samples SAP Programming

Audio must always be present on audio channel 3 (Group 1 Pair 2 channel 1).

Default operation is mono mix of 1 & 2 on 3.

GPI scripts are used to configure the audio from automation control.

GPI_A_Close Pass 3 to 3 – file name: gpi-a-close

Source Bus A Config

```
object bus_setup ("a") {
object channel ("2L") {
source = "AES2L" gain = 0 }
}
```

GPI_A_Open Revert to Mono Mix of 1 & 2 on 3 – file name: gpi-a-open

Source Bus A Config

```
object bus_setup ("a") {
object channel ("2L") {
source = "AES1M" gain = 0 }
}
```

GPI_B_Close Remap channel 4 to channel 3 – file name: gpi-b-close

Source Bus A Config

```
object bus_setup ("a") {
object channel ("2L") {
source = "AES2R" gain = 0 }
}
```

GPI_B_Open Revert to Mono Mix of 1 & 2 on 3 – file name: gpi-b-open

Source Bus A Config

```
object bus_setup ("a") {
object channel ("2L") {
source = "AES1M" gain = 0 }
}
```


10.1.3. Bring Up a Trouble Slide Called “trouble”

These 2 GPI scripts will fade out all displayed logos and stop all audio clips as well as invoke a full screen logo called “trouble” or a trouble slide. The slide must first be prepared in InstaLogo™ or Overture™ and uploaded to the unit.

```
GPI_H_Close – file name: gpi-h-close  
# Logo commands  
cmd media_all_out()  
cmd media_in("trouble")  
GPI_H_Open – file name: gpi-h-open  
# Logo commands  
cmd media_all_out()
```

The Logo Layer must be enabled for logos and audio clips to playout on the desired output bus of 7825DSK2-LG-HD. If you want to preview an audio clip, make sure the logo layer for the Preview Bus is enabled and disable the logo layer on the Program Bus for the 7825DSK2-LG-HD. Use Cue in the LGA units, however, there is a known bug in that cued audio clips playout on the program output.

11. INDEX

A	
AFD Trigger.....	4-16
Arrow buttons.....	4-3
Audio Clips	
Pause Time.....	4-41
Repeat Count.....	3-38, 4-41
Automation Debug	4-19
B	
BKG	
DCP Button	7-2
BKG/A	2-1
LED	4-4
BKG/A Button	
Preview Bus.....	4-1
Program Bus.....	4-2
BLACK	
Button	4-2
DCP Button	7-3
LED	4-4
BUS SELECT	
LED	4-4
Buttons	
↑, ↓ Arrow buttons	4-3
BKG/A.....	4-1, 4-2
BLACK	4-2
BYPASS	4-2
DSK	4-1, 4-2
FILL/B	4-1, 4-2
LOGO	4-2
LOGO IN/OUT	4-3
PGM BUS LOCK.....	4-3
SELECT	4-3
SETUP	4-3
TRANSITION	4-2
BYPASS	
Button	4-2
DCP Button	7-5
C	
Captions	
Protecting Line 21 from Logos.....	4-18
COM C	2-3
Com D	3-10, 4-17
COMM	
LED	4-5
Connecting the GPIs.....	2-8
Connecting the GPOs	2-8
Connecting the Linear Time Code.....	2-7
Connecting the Video	
Genlock Reference	2-7
Outputs	2-7
Connecting to an Ethernet Network	2-7
Crawl Logos	
Colours	3-32, 4-41
Crawl Rate.....	3-31, 4-39
Font	3-32, 4-40
Font Size	3-32, 4-40
Overview.....	3-29, 4-39
Pause Time	4-40
Repeat Count	3-31, 4-40
Transparency.....	3-31, 4-40
D	
Daylight Saving Time	4-13
DCP	
Buttons	
BKG	7-2
BLACK	7-3
BYPASS.....	7-5
DSK.....	7-2
EFFECT SELECT	7-3
FILL	7-3
GAIN	7-4
KEY SELECT	7-4
MATTE.....	7-5
PANEL LOCK	7-5
PGM.....	7-2
PRESET SAVE	7-4
PVW.....	7-2
RATE	7-4
SELECT	7-5
SETUP	7-5
SWAP AFTER.....	7-3
TAKE.....	7-3
THRESHOLD	7-4
Displaying Logos	
Basic Operation	7-6
LEDS	
COMM.....	7-6
DSK.....	7-6
Operation	
Overview	7-6
Setup Menu	

Navigation	7-6
Overview	7-6
Shaft Encoders	7-5
Desktop Control Panel Operation	
Overview	7-6
Displaying Logos	
Basic Operation	4-5
DSK	
Auto Key Enable	4-24
DCP Button	7-2
DCP LED	7-6
Key Gain	4-23
Key Offset	4-24
Key Type	4-23
LED	4-4
Opacity	4-23
Self Key Threshold	4-24
Transparency	4-23
DSK Button	
Preview Bus	4-1
Program Bus	4-2
DSK Menu	
Overview	3-12, 4-23
E	
EAS	
Colours	3-23, 4-35
Crawl Rate	4-35
Font	4-35
Font Size	4-35
Position	4-35
EFFECT SELECT	
DCP Button	7-3
Ethernet Connections	2-5
F	
Features	1-1
FILL	
DCP Button	7-3
FILL/B	
LED	4-4
FILL/B and KEY/C	2-1
FILL/B Button	
Preview Bus	4-1
Program Bus	4-2
Firmware Upgrade via Nomad	9-2
G	
GAIN	
DCP Button	7-4

GENERAL Menu	
Overview	4-9
Genlock Reference	
Connections	2-7
GPI	
Actions when the GPI Closes	3-17, 4-28
Overview	3-17, 4-27
Selecting a GPI to Configure	4-27
GPI Scripting	10-1
GPIO Connections	2-4
GPO Functions	3-16, 4-30
H	
HTML Audio	
Voiceover	3-36, 6-3
HTML Audio Setup Page	6-2
Audio Keyer	3-36, 6-2
Audioclip	3-36, 6-3
Black	3-35, 6-2
Duck	3-37, 6-3
Gain	3-37, 6-3
Layer	3-35, 6-2
Non-pcm	3-37, 6-3
Source	3-36, 6-3
Wav File Payout	3-37, 6-4
HTML Setup Page	6-1
Audio Mapping	6-1, 6-6
K	
KEY SELECT	
DCP Button	7-4
KEYER	
LED	4-4, 7-6
L	
LEDS	
BKG/A	4-4
BLACK	4-4
COMM	4-5
DSK	4-4
FILL/B	4-4
KEYER	4-4
LOGO	4-4
PGM BUS LOCK	4-4
PSU 1	4-5
PSU 2	4-5
TRANSITION	4-4
Local Date	4-14
Local Time	
Displaying	3-5, 4-12
DST Compensation	4-13

Time Zone Offset	3-7, 4-13
LOGO	
LED	4-4
LOGO Button	
Preview Bus	4-2, 7-3
Program Bus	4-2
LOGO IN/OUT	
Button	4-3
LTC IN	2-2
LTC Input	
UTC or Local time	3-6, 4-13

M

M2100 Auto Debug	4-19
Manage Files	
Delete	4-21
Destination Media	4-21
File	4-20
Format	4-21
Source Media	4-20
To	4-21

MANAGE FILES Menu	
Overview	4-20

Matte	
Aspect Ratio	3-14, 4-22
Bottom	3-14, 4-22
DCP Button	7-5
Top	3-14, 4-22
Turning On and Off	3-14, 4-22
User Aspect Ratio	3-14, 4-22

MATTE Menu	
Overview	3-14, 4-21

MEDIA	
BG Opacity	3-31, 4-40
Clip Pause	4-41
Clip Repeat	3-38, 4-41
Crawl BG	3-32, 4-41
Crawl FG	3-32, 4-41
Crawl Font	3-32, 4-40
Crawl Height	3-32, 4-40
Crawl Pause	4-40
Crawl Rate	3-31, 4-39
Crawl Repeat	3-31, 4-40
Fade In Time	3-29, 3-31, 4-38
Fade Out Time	3-29, 3-31, 4-39
FG Opacity	3-31, 4-40
Gain	3-29, 3-30, 4-38
Hold Time	3-29, 3-31, 4-39
Horizontal Position	3-28, 3-30, 4-38
Transparency	3-29, 3-30, 4-38
UD Timer	3-29, 3-31, 4-39
Vertical Position	4-38

MEDIA Menu	
Overview	3-28, 4-37

Menus	
Navigation	4-6
Overview	4-5
DSK	3-12, 4-23
GENERAL	4-9
MANAGE FILES	4-20
MATTE	3-14, 4-21
MEDIA	3-28, 4-37
PRESET	3-24, 4-26
Top Level	4-8
TRANSITION	3-20, 4-24

METAR Setup Page	6-5
Airport ID	6-5
METAR Server IP	6-5
Poll Interval	6-5
Poll Interval at Failure	6-5

N

Network	
Ethernet Hardware Address	4-16
Setting Network Addresses	4-15
Setting the Gateway	4-15
Setting the IP address	3-8, 4-15
Setting the Sub Net Mask	3-8, 4-15
Network Info	4-15

O

Opacity	4-23
Overview	1-1

P

PANEL LOCK	
DCP Button	7-5

PGM	
DCP Button	7-2

PGM BUS LOCK	
Button	4-3

Preset	
Exporting	3-25, 4-31
Preset Source	4-31
Recalling	3-24, 4-31
Storing	3-24, 4-31

PRESET Menu	
Overview	3-24, 4-26

PRESET SAVE	
DCP Button	7-4

Preview Bus	
BKG/A Buttons	4-1
DSK Button	4-1

FILL/B Buttons	4-1
Preview Bus LOGO Button	4-2, 7-3
Preview Out.....	2-2
Program Bus	
BKG/A Buttons.....	4-2
DSK Button	4-2
FILL/B Buttons	4-2
LOGO Button	4-2
Program Out	2-2
PSU 1	
LED.....	4-5
PSU 2	
LED.....	4-5
PVW	
DCP Button.....	7-2
R	
RATE	
DCP Button.....	7-4
Real Time Clock	
Displaying	4-12
General Info	4-11
Setting.....	4-12
Synchronizing to the UTC Time.....	3-7, 4-14
REF IN.....	2-2
Reference Timing	
H 0 to Max Samples	3-3, 4-11
Type.....	4-10
V 0 to Max Samples.....	4-11
Remote Control Panel	
Connecting.....	2-5
S	
Scripting Object Syntax.....	10-3
SDI Video In:	2-1
SELECT	
Button	4-3
DCP Button.....	7-5
Serial Ports	
COM D.....	2-3
Remote Panel	2-2
Serial Protocol	
Com Port D	3-10, 4-16, 4-17
SERIAL CONTROL Port C	4-16
Set Temperature	3-20, 4-33
SETUP	
Button	4-3
DCP Button.....	7-5
SETUP MENU	
Top Level Menu	4-8

Shaft Encoders	
DCP Button.....	7-5
SNMP Trap Destination	4-16
Specifications.....	8-1
Control.....	8-1
Dimensions	8-2
Electrical	8-2
EMI/RFI	8-2
GPI	8-2
GPO.....	8-2
LTC.....	8-1
Reference Video.....	8-1
SDI Video	8-1
TimeCode	8-1
SWAP AFTER	
DCP Button.....	7-3
T	
TAKE	
DCP Button.....	7-3
Temperature Configuration Items ..	3-19, 4-32
Temperature Probe	
Connecting	2-12
Temperature Read Loss	3-20, 4-33
THRESHOLD	
DCP Button.....	7-4
Time Setup	
LTC Date	4-15
Real Date.....	3-5, 4-14
Transition	
Pause	3-22, 4-26
Rate	3-21, 4-25
Swap.....	3-21, 4-25
Type.....	3-21, 4-25
TRANSITION	
Button	4-2
LED.....	4-4
TRANSITION Menu	
Overview.....	3-20, 4-24
Transparency.....	4-23
Trouble Slide	10-7
U	
Unit Name	4-18
Up Down Timer.....	3-7, 4-18
Upgrading Firmware	
Initiating from Terminal Program	9-5
Overview.....	9-1
Terminal Program Setup	9-4

- Uploading the New Firmware9-6**
- UTC Date4-14**
- UTC Time**
 - Displaying3-5, 4-12

V

Video Output Timing	4-10
Video Reference	2-2
Setting the Timing Reference	4-11
Video Standard	
Setting the Video Standard.....	4-10