



## **RCP-1500**

Joystick type of Remote Control Panel for HDC/HSC/HXC series cameras

## **RCP-1501**

Dial type of Remote Control Panel for HDC/HSC/HXC series cameras

## **RCP-1530**

Joystick type of Remote control panel for HDC/HSC/HXC series cameras (slim)

Software Release Notes

Version 3.70

Date: Jun 9<sup>th</sup>, 2021

## **Copyright Information**

The material in this document consists of information that is the property of Sony Electronics Inc. and is intended for use by the purchasers of the equipment described in this document. Sony Electronics Inc. expressly prohibits the duplication of any portion of this document or the use thereof for any purpose other than the operation or maintenance of the equipment described in this document without the express written permission of Sony Electronics Inc.

## NEW FEATURES

### 1. Added SR Live MetaFile Store/Recall function

Added FILE-> SR Live MetaFile-> Store / Recall.

You can perform Store / Recall / Recall Cancel operations of SR Live MetaFile saved in the device that supports SR Live MetaFile. You can also edit the file name using the MSU software keyboard with the Edit Name function.

At present, the device that supports SR Live MetaFile is HDRC-4000.




### 2. Added SR Live MetaFile file transfer function

Added FILE-> SR Live MetaFile-> Transfer.


Supports transfer of SR Live MetaFile stored in the device that supports SR Live MetaFile to a MemoryStick attached to the MSU, or vice versa.

At present, the device that supports SR Live MetaFile is HDRC-4000.

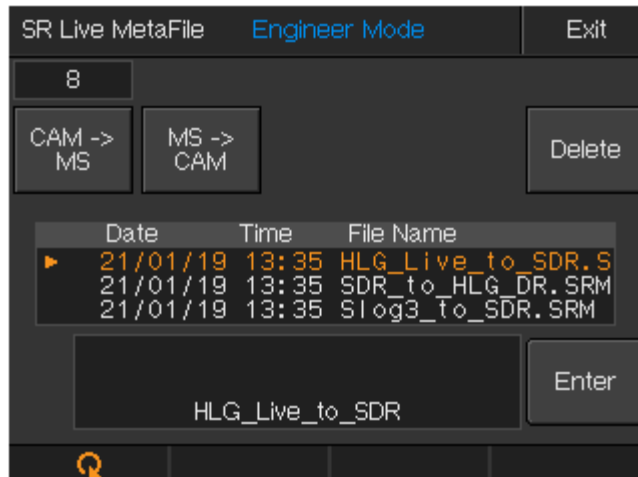

### 3. Added HDR Target White display

Added HDR Target White value display to HDR Operation in Paint menu. HDR Target White is the number of nits displayed in HDR when shooting white with a brightness of 100 nits (= 100%) in SDR when both HDR and SDR are output from the camera.

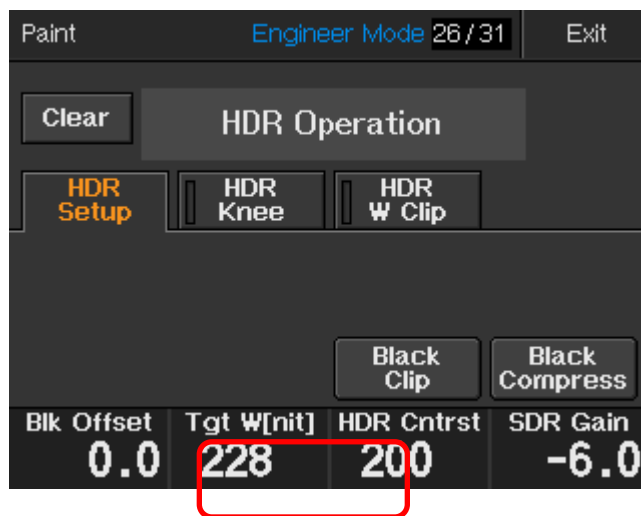

### 4. Supported HDRC-4000 signal input status warning display

Supports the function to display a warning message on the LCD screen when there is no input signal of HDRC-4000 or when there is a defect (for example, only 3 out of 4 are included). To enable this function, change the settings on the HDRC-4000.

- When there is no input signal: SDI Input NG (No Signal)
- When there is a defect in the input signal: SDI Input NG (Not Complete)

## 5. Supported Master Black knob function customization (RCP-1501 only)

Added Config-> RCP-> Customize-> MB Knob Customize.

Master Flare function can be assigned to the Master Black knob. The value of the assigned function is displayed on the MASTER BLACK display.




## FUNCTION CHANGE / FUNCTION IMPROVEMENT

### 1. Changed Converter All-Settings Store / Recall function menu UI

Improved the Store / Recall menu of Converter All-Settings and unified the operability with the Store / Recall menu of SR Live MetaFile.

You can perform Store / Recall / Recall Cancel operations of this setting file for HDRC-4000. You can also edit the file name using the MSU software keyboard with the Edit Name function.

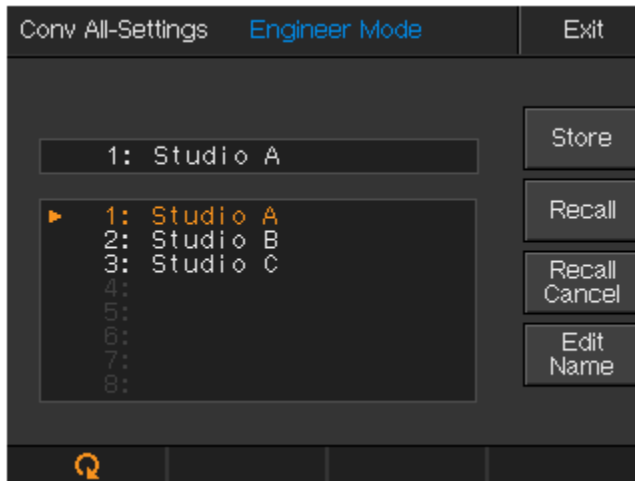

### 2. The network security is enhanced.

## CONFIRMATION AFTER UPDATE

Confirm if the version of the MAIN is V3.70 and the version of the LOADER is V2.10.

You can also check it in Config> MSU> Information> Version.

MAIN	V3.70
BOOT	V2.00
LOADER	V2.10
SUBSYS	V2.10