

Appendix C

Probe Connections and Protocol

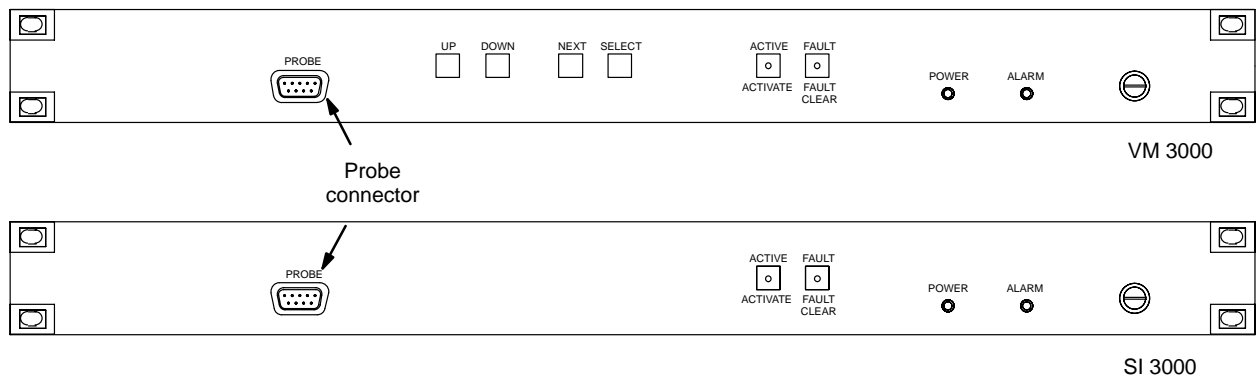


Figure C-1. Location of Probe connectors.

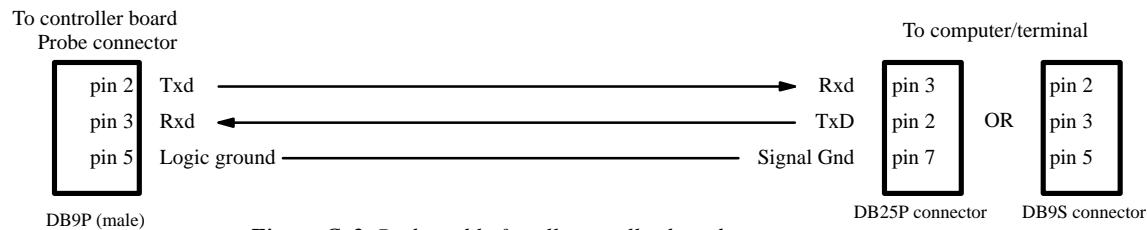


Figure C-2. Probe cable for all controller boards.

The Probe connection is provided for test purposes. The protocol for this port is 9600 baud, 8 data bits, 1 stop bit, no parity.

All boards can be reset by momentarily shorting pin 7 to pin 5 on the Probe port.