

TSI1000 PINOUTS

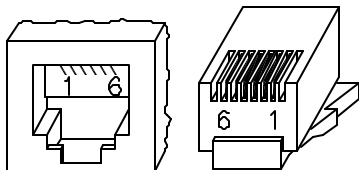
The pinout for the TSI000 DB9 connectors (COM7-COM12) is as follows:

- 3 - TX+
- 8 - TX-
- 4 - TX gnd
- 7 - RX+
- 2 - RX-
- 6 - RX gnd
- 1 - Chassis gnd
- 9 - Chassis gnd

The pinout for the 4211 DB9 connector is as follows:

- 3 - RX+
- 8 - RX-
- 4 - RX gnd
- 7 - TX+
- 2 - TX-
- 6 - TX gnd
- 1 - Chassis gnd
- 9 - Chassis gnd

TSI1000 RJ12 pinouts

<i>Pin</i>	<i>Function</i>		
1	Rx-		
2	Gnd		
3	Tx+		
4	Tx-		
5	Not used		
6	Rx+		
		RJ-12 JACK	RJ-12 PLUG

NOTE: RDU1500's connected to COM3-COM6 use only the center four conductors, and are a pin-to-pin connection (pin2 to pin2, pin3 to pin 3, etc.)