

## Data Sheet

Rev. 2008-10-16

## Central Control 2


FC Preset, Dynamics, EQ, Filter, Panning, Monitoring

961/12

## • Note

This datasheet contains particulars about indicators, power consumption, dimensions and weight.

## Panel Front View

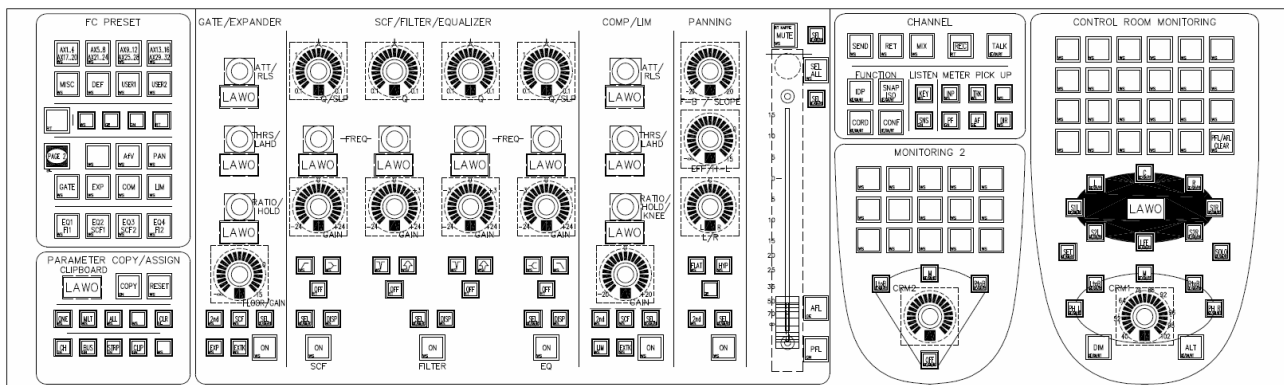

## Copyright/Disclaimer

All rights reserved. Permission to reprint or electronically reproduce any document or graphic in whole or in part for any reason is expressly prohibited, unless prior written consent is obtained from the Lawo AG.

All trademarks and registered trademarks belong to their respective owners. It cannot be guaranteed that all product names, products, trademarks, requisitions, regulations, guidelines, specifications and norms are free from trade mark rights of third parties.

All entries in this document have been thoroughly checked, however no guarantee for correctness can be given. Lawo AG cannot be held responsible for any misleading or incorrect information provided throughout this manual.

Lawo AG reserves the right to change specifications at any time without notice

© Lawo AG, October 2008

## General

Parameter	Conditions	Min.	Typ.	Max.	Unit
<b>Cooling requirement</b>					
Power dissipation	12V		9.0		W
<b>Mechanical data</b>					
Height			185		mm
Width			622		mm
Depth	incl. knobs		70		mm
Weight			3064		g

## Power Supply

Parameter	Conditions	Min.	Typ.	Max.	Unit
Operating supply voltage	DC	10.8	12	13.2	V
Nominal supply current	12V		750		mA
Nominal power consumption	12V		9.0		W

## Indicators

Indicator	Function	Status	Condition
<b>Left Side</b>			
H1	LCA	static red/Off	LCA not booted/normal operation
H2	USB Controller	red	not used
H3	USB Controller	green blinking	normal operation
H4	USB Controller	yellow blinking	Data transmission USB
H5	LCA	green	not used
H6	LCA	yellow	not used
<b>Right Side</b>			
H1	Fader Controller	green blinking	normal operation
H2	LCA	static red/Off	LCA not booted/normal operation
H3	USB Controller	green blinking	normal operation
H4	USB Controller	yellow blinking	Data transmission USB
H5	USB Controller	red	not used
H6	LCA	green	not used
H7	LCA	yellow	not used

## Further particulars/explanatory notes

- Power Consumption**

All particulars are typical and can increase in worst case.

