

SECTION 7

EXPLODED VIEWS & REPLACEMENT PARTS LIST

Model No. : **AG-HPX170P, AG-HPX171E, AG-HPX172EN**
AG-HPX173MC

Note:

1. *Be sure to make your orders of replacement parts according to this list.
2. Unless otherwise specified, all resistors are in OHMS, K=1,000 OHMS, all capacitors are in MICROFARADS (μ F), P= μ F.
3. The P.C. Board unit marked with "■" shown below the main assembled parts.
4. The parts marked with Ⓔ on the exploded view show the electric parts.
5. IMPORTANT SAFETY NOTICE
Components identified with the mark ⚠ have the special characteristics for safety. When replacing any of these components, use only the same type.
6. The marking (RTL) indicates the retention time is limited for this item.
After the discontinuation of this assembly in production, it will no longer be available.
7. "M" in Remark column indicates needed in the periodical maintenance.

CONTENTS

MAIN FRAME PARTS ASSEMBLY	MPL-1
EVF PARTS ASSEMBLY	MPL-3
SIDE CASE PARTS ASSEMBLY	MPL-5
REAR JACK & BACK CASE PARTS ASSEMBLY.....	MPL-7
GRIP CASE PARTS ASSEMBLY	MPL-9
LCD PARTS ASSEMBLY	MPL-11
PACKING PARTS ASSEMBLY	MPL-13
ELECTRICAL REPLACEMENT PARTS LIST	EPL-1

VYK2U90
AUDIO SW COV

VYK2U90
AUDIO SW COVER U


MAIN FRAME PARTS ASSEMBLY

Components identified with the mark have the special characteristics for safety. When replacing any of these components, use only the same type.

[illegible][illegible]

EVF PARTS ASSEMBLY

Components identified with the mark  have the special characteristics for safety. When replacing any of these components, use only the same type.

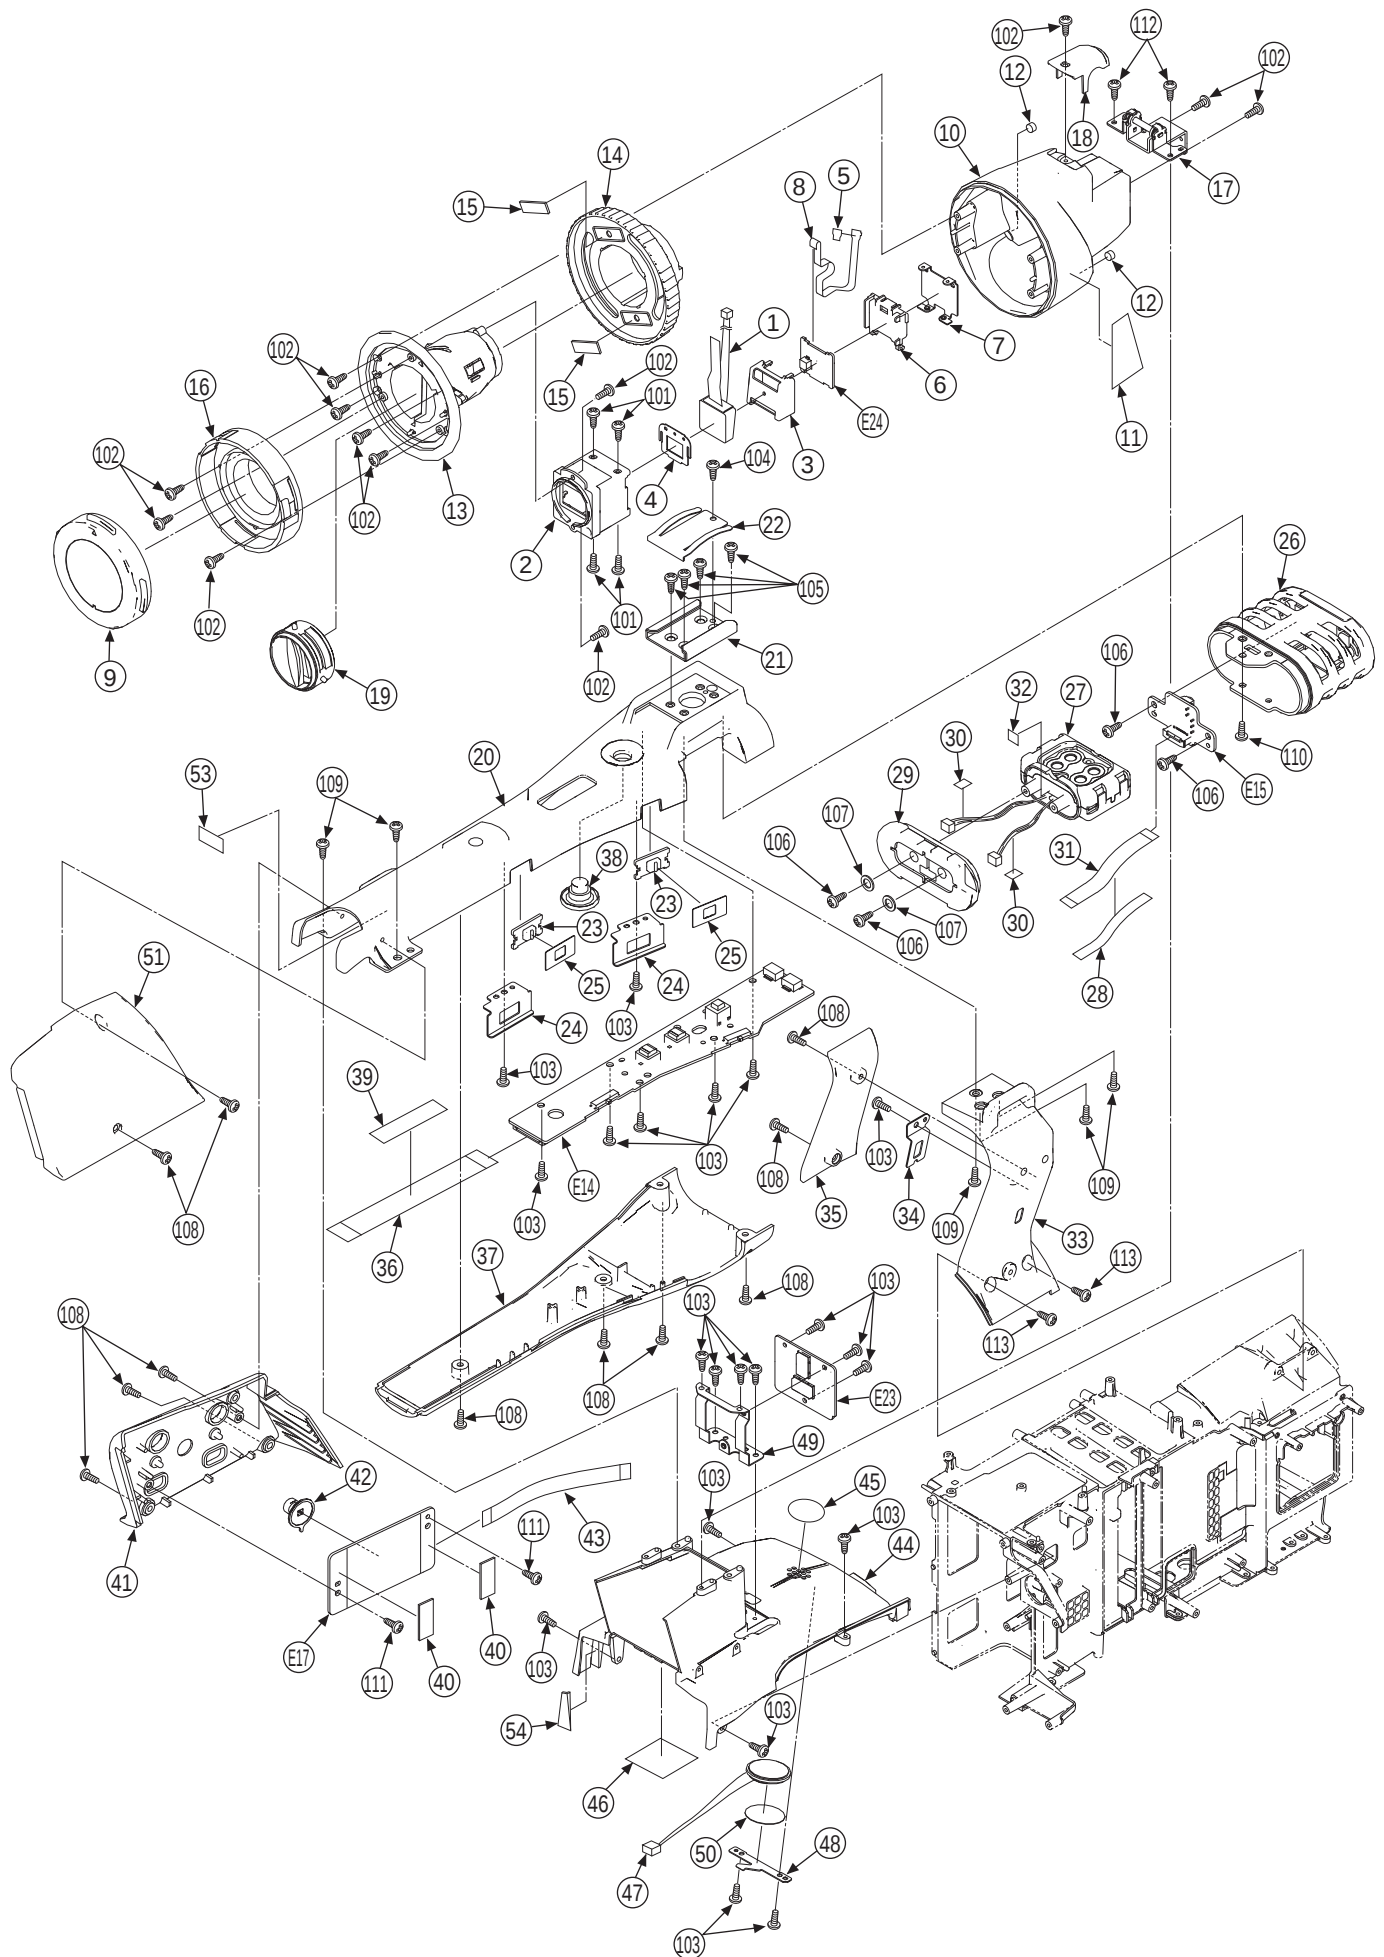


EVF PARTS ASSEMBLY

Components identified with the mark have the special characteristics for safety. When replacing any of these components, use only the same type.

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
1	L5EDDXM00003	ELECTRIC VIEW FINDER	1	
2	VG00A84	LCD CASE	1	
3	VMX3685	P. C. BOARD SPACER	1	
4	VG07088	LCD MASK SHEET	1	
5	VMZ3799	EVF SHEET	1	
6	VG00A85	LCD CASE COVER	1	
7	VMP9179	LCD CASE ANGLE	1	
8	VWJ1805	PRINTED FLEXIBLE CABLE	1	
9	VYK1V99	EYE CAP U	1	
10	VG6251	EVF CASE	1	
11	VQL1U26	SUNLIGHT CAUTION LABEL	1	
12	VMG1286	CUSHION RUBBER	2	
13	VDK0187	HELICOID CAM TUBE	1	
14	VG00A82	ADJUST RING	1	
15	VMT1931	RING SPACER	2	
16	VG00A83	EYE CAP BASE	1	
17	VKC0621	EVF HINGE	1	
18	VG00A87	EVF HINGE COVER	1	
19	VXW0991	EVF LENS	1	
20	VKH0437	HANDLE	1	
21	VJF1421	SHOE	1	
22	VMC1697	SPRING	1	
23	VGUD027	SLIDE SWITCH KNOB	2	
24	VMP9170	SLIDE SW KNOB PLATE	2	
25	VGH4857	SLIDE KNOB SHEET	2	
26	VYK2U82	MIC CASE 1U	1	
27	VYK1R40	MIC U	1	
28	VMZ3775	ABSORPTION SHEET	1	
29	VMG1732	MIC DUMPER RUBBER	1	
30	VMZ3776	ABSORPTION SHEET	2	
31	VWJ10G6065L0	PRINTED FLEXIBLE CABLE	1	
32	VMT1767	MIC DUMPER SHEET	1	
33	VKH0438	HANDLE STAY	1	
34	VMP9171	PLATE	1	
35	VG00A65	HANDLE STAY COVER	1	
36	VWJ24G7060L0	PRINTED FLEXIBLE CABLE	1	
37	VG00A64	HANDLE GRIP	1	
38	VGU9988	REC BUTTON	1	
39	VMZ3474	LCD INSULATOR	1	
40	VMT1948	GASKET	2	
41	VYK2U89	VF CASE R 1 U	1	
42	VGUD040	MENU MODE KNOB	1	
43	VWJ10G7060L0	PRINTED FLEXIBLE CABLE	1	
44	VGM2282	TOP CASE	1	
45	VMZ3712	SPEAKER NET	1	
46	VMZ3789	SD CARD BARRIER	1	
47	LOAA02A00054	SPEAKER	1	
48	VMP9177	SPEAKER ANGLE	1	
49	VMP9233	TOP CON ANGLE	1	
50	VMG1286	CUSHION RUBBER	1	
51	VG6249	VF CASE L	1	
△ 52	VGN1B86	RATING LABEL	1	FOR AG-HPX170P
△ 52	VGN1B87	RATING LABEL	1	FOR AG-HPX171E
△ 52	VGN1B88	RATING LABEL	1	FOR AG-HPX172EN
△ 52	VGN1B89	RATING LABEL	1	FOR AG-HPX173MC
53	VMT1767	MIC DAMPER SHEET	1	
54	VMZ3805	SHADING SHEET	1	
101	XQN16+C3FJ	SCREW	4	
102	XQN2+BJ5FJK	SCREW	13	
103	XQN2+B4FN	SCREW	21	
104	XSN2+4FC	SCREW	1	
105	XSS2+4FJK	SCREW	4	
106	XQN2+BJ4FJ	SCREW	4	
107	XWG2FJ	WASHER	2	
108	XQN2+B4FJK	SCREW	11	
109	XYN26+J6FJ	SCREW	5	
110	XYN2+F5FJ	SCREW	1	
111	XQN2+BJ5FN	SCREW	2	
112	XYN2+F6FJ	SCREW	2	
113	XYN26+J6FJK	SCREW	2	

[illegible]


SIDE CASE PARTS ASSEMBLY

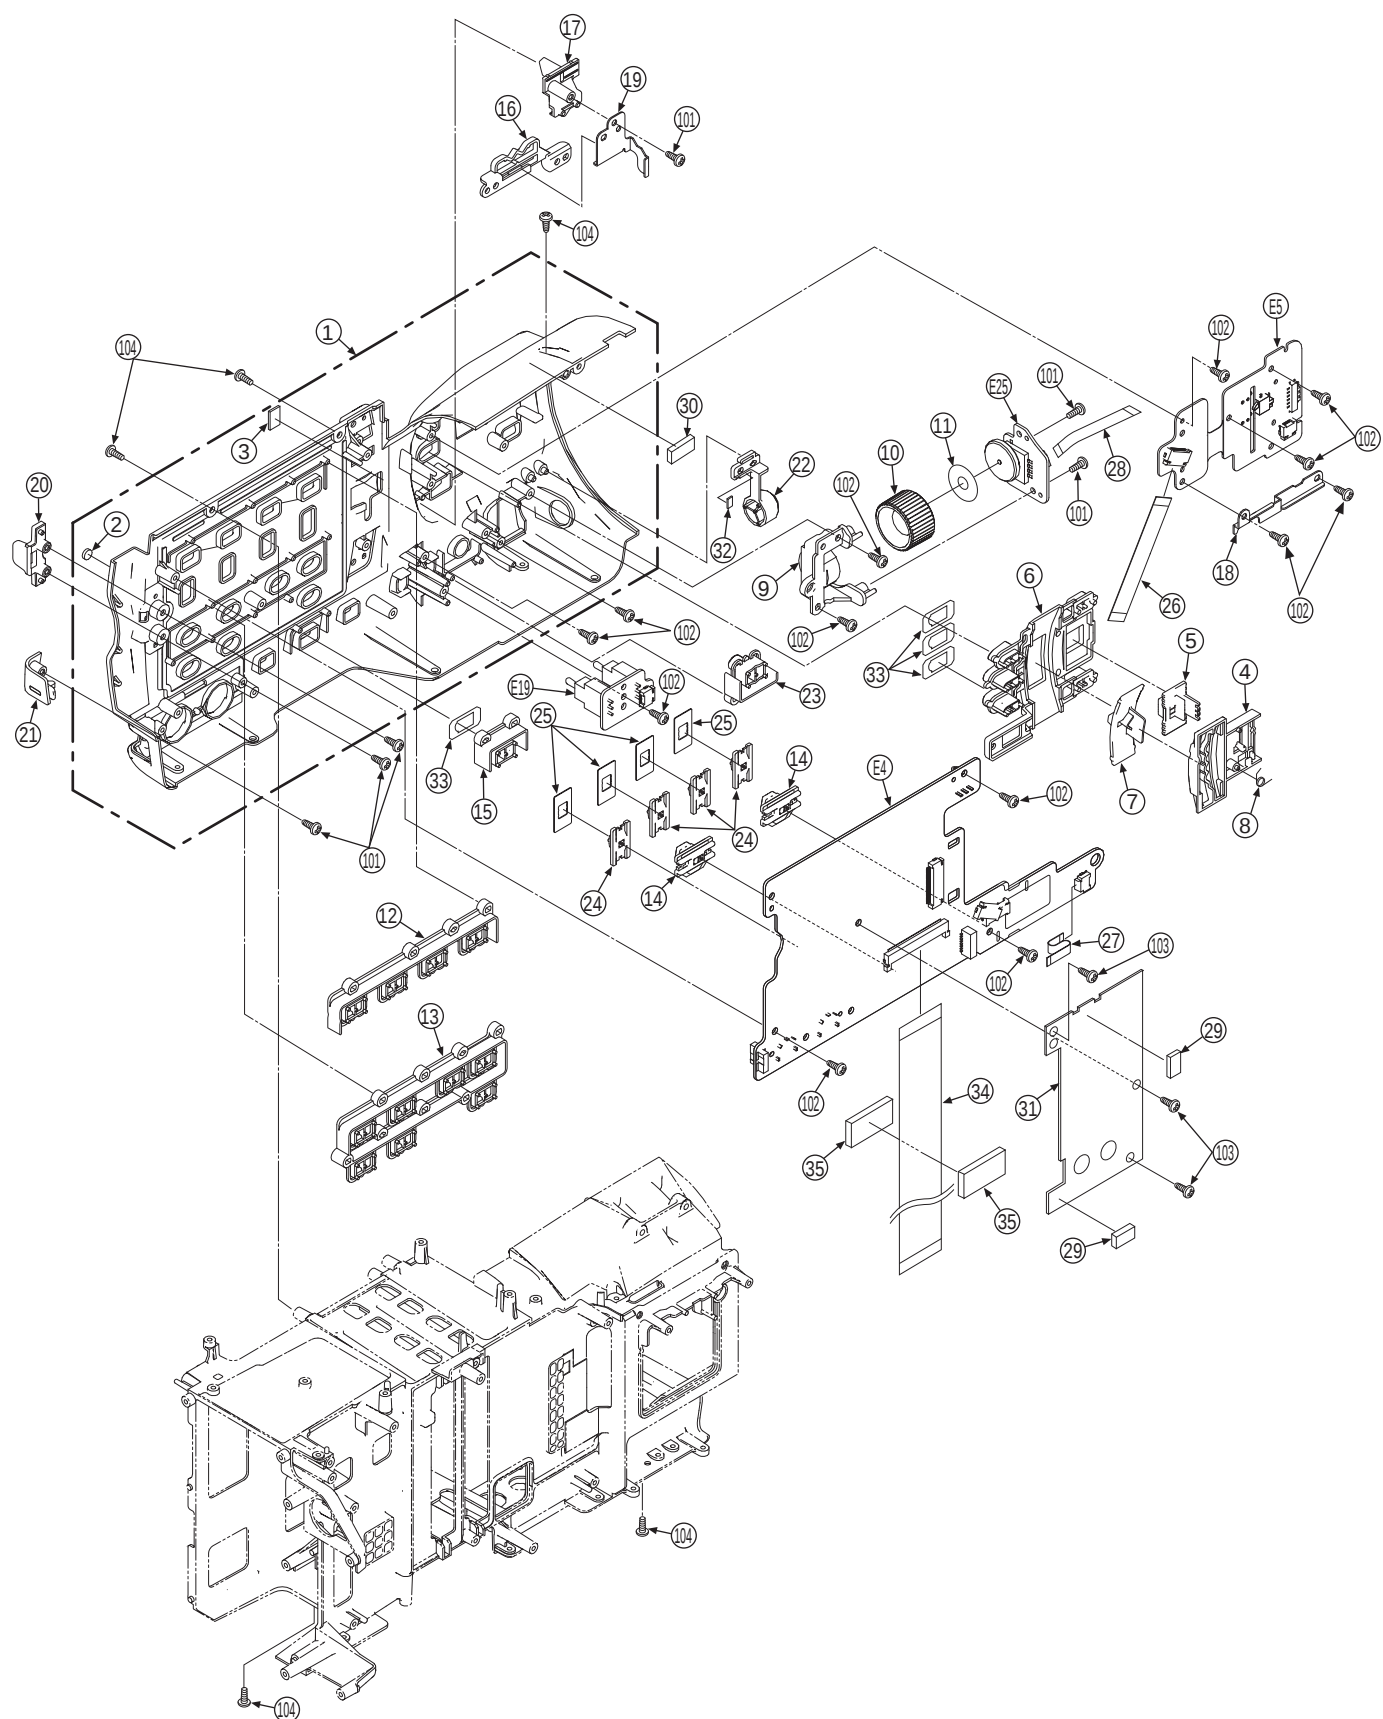

SIDE CASE PARTS ASSEMBLY

[illegible]


REAR JACK & BACK CASE PARTS ASSEMBLY

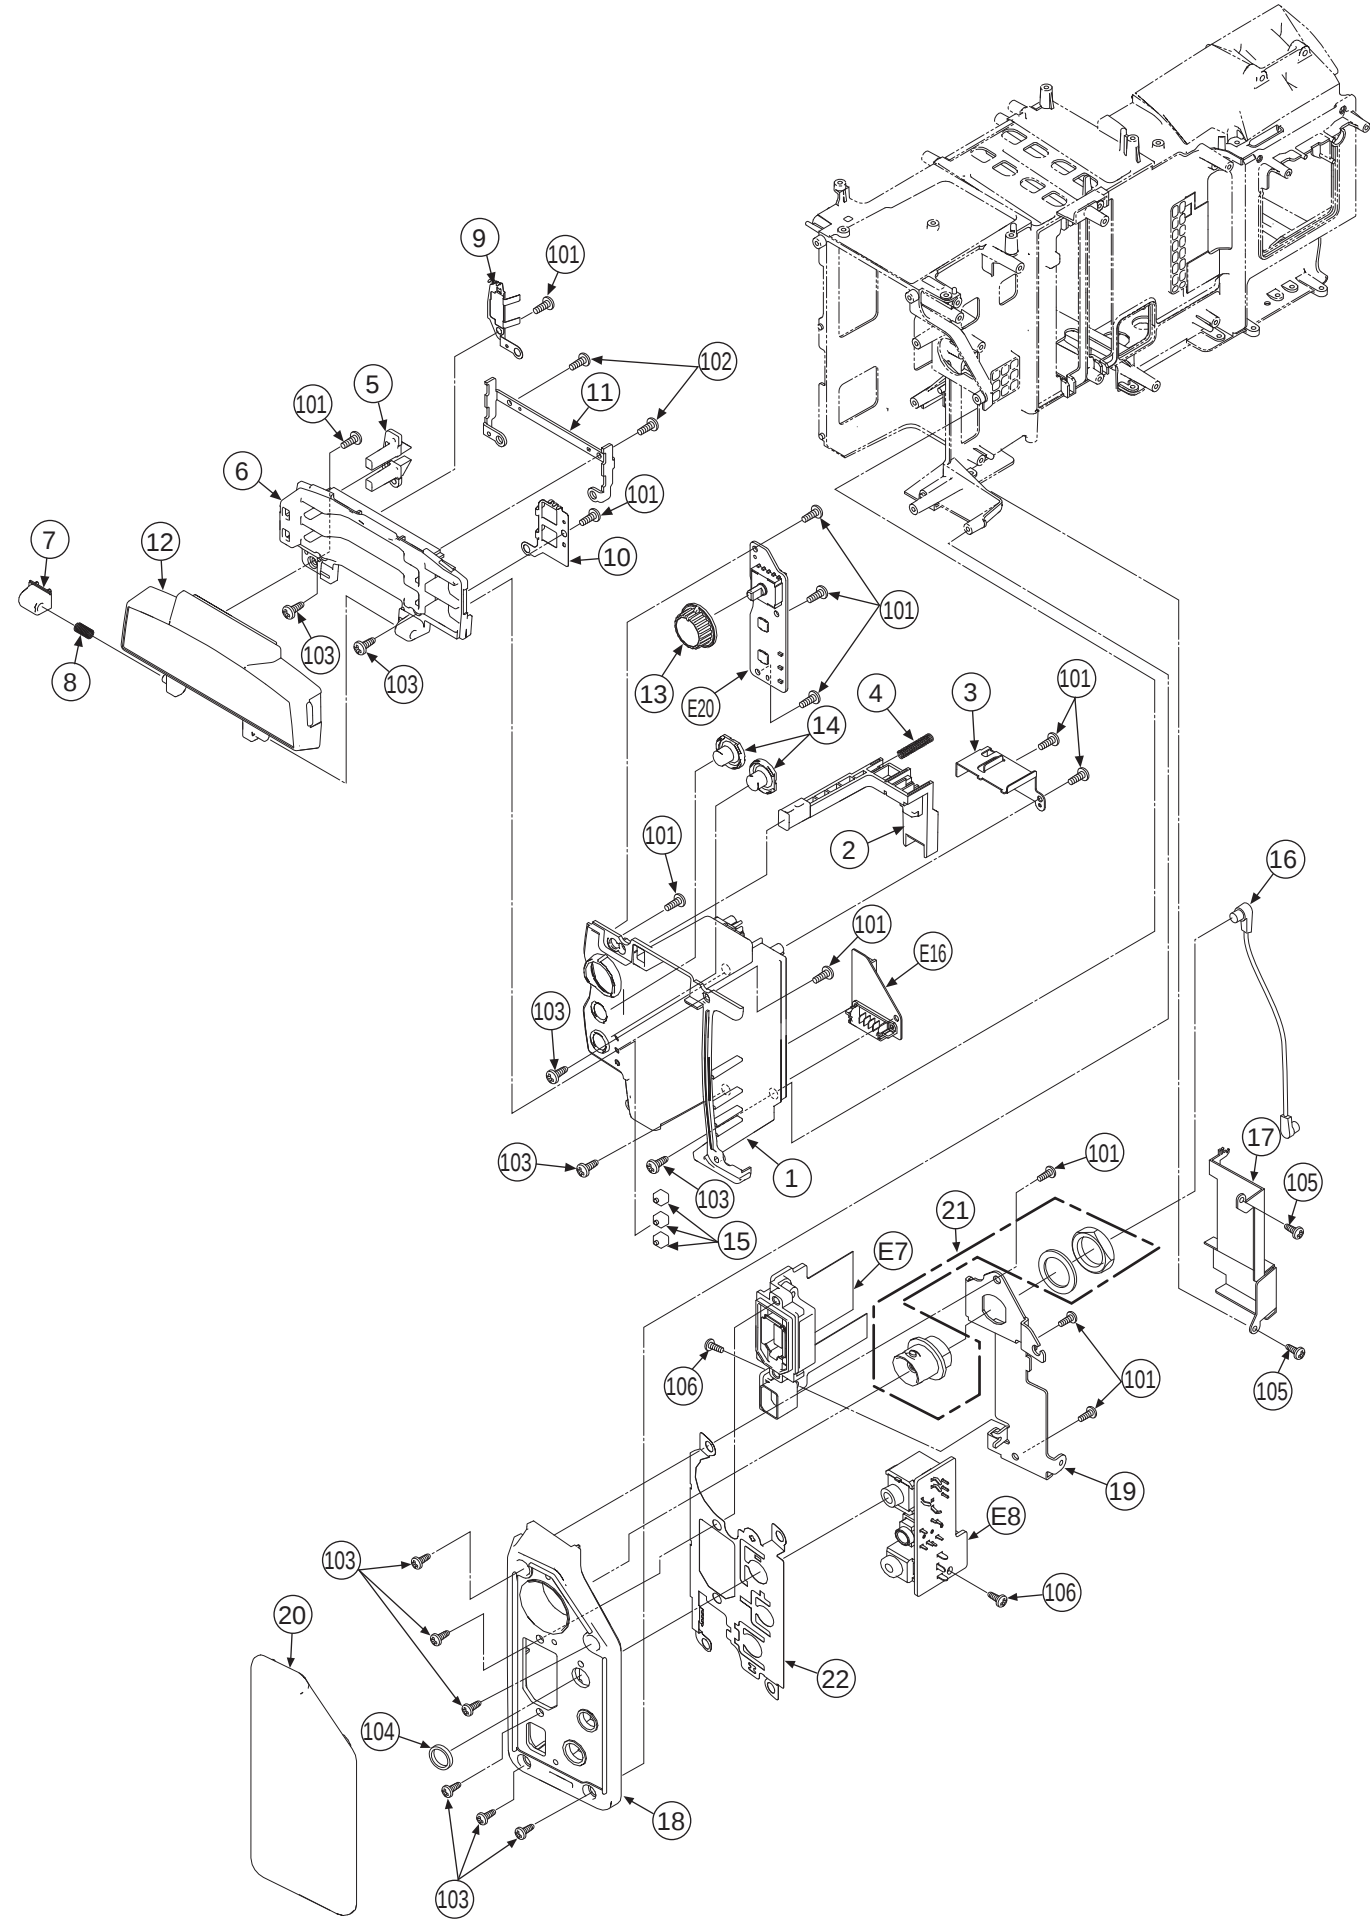

REAR JACK & BACK CASE PARTS ASSEMBLY

[illegible]


GRIP CASE PARTS ASSEMBLY

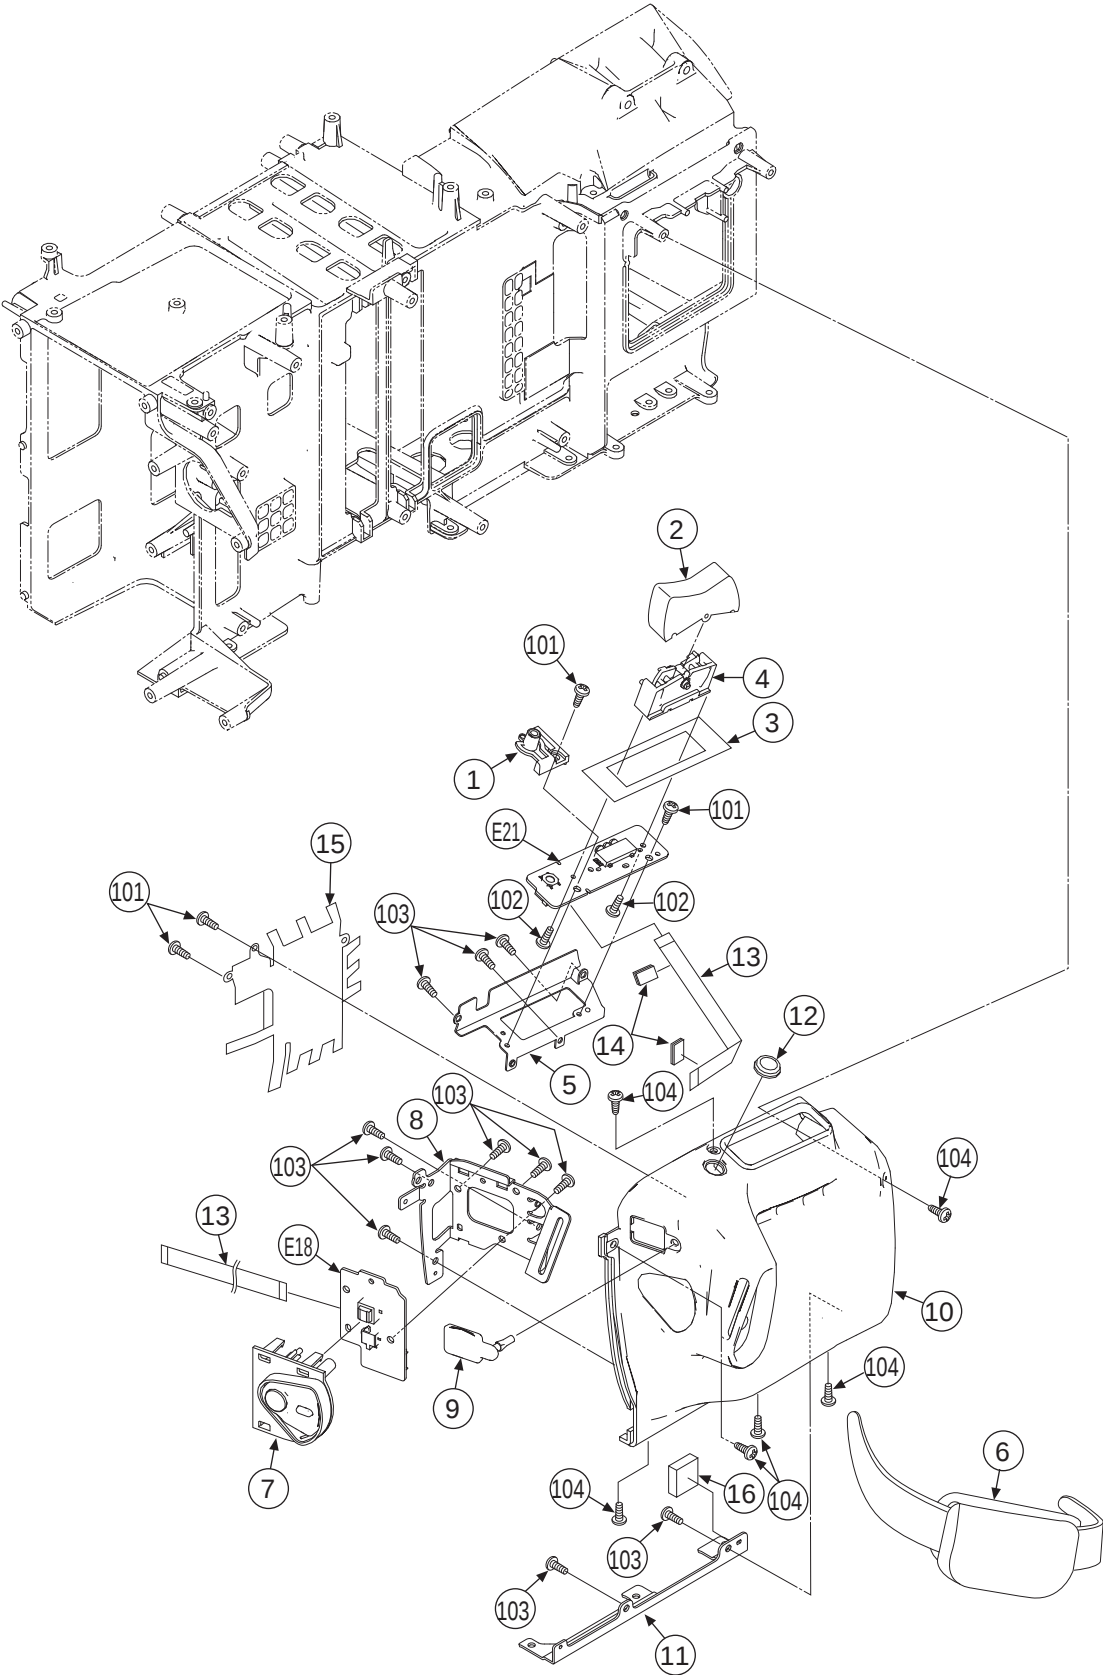

GRIP CASE PARTS ASSEMBLY

[illegible]

LCD PARTS ASSEMBLY

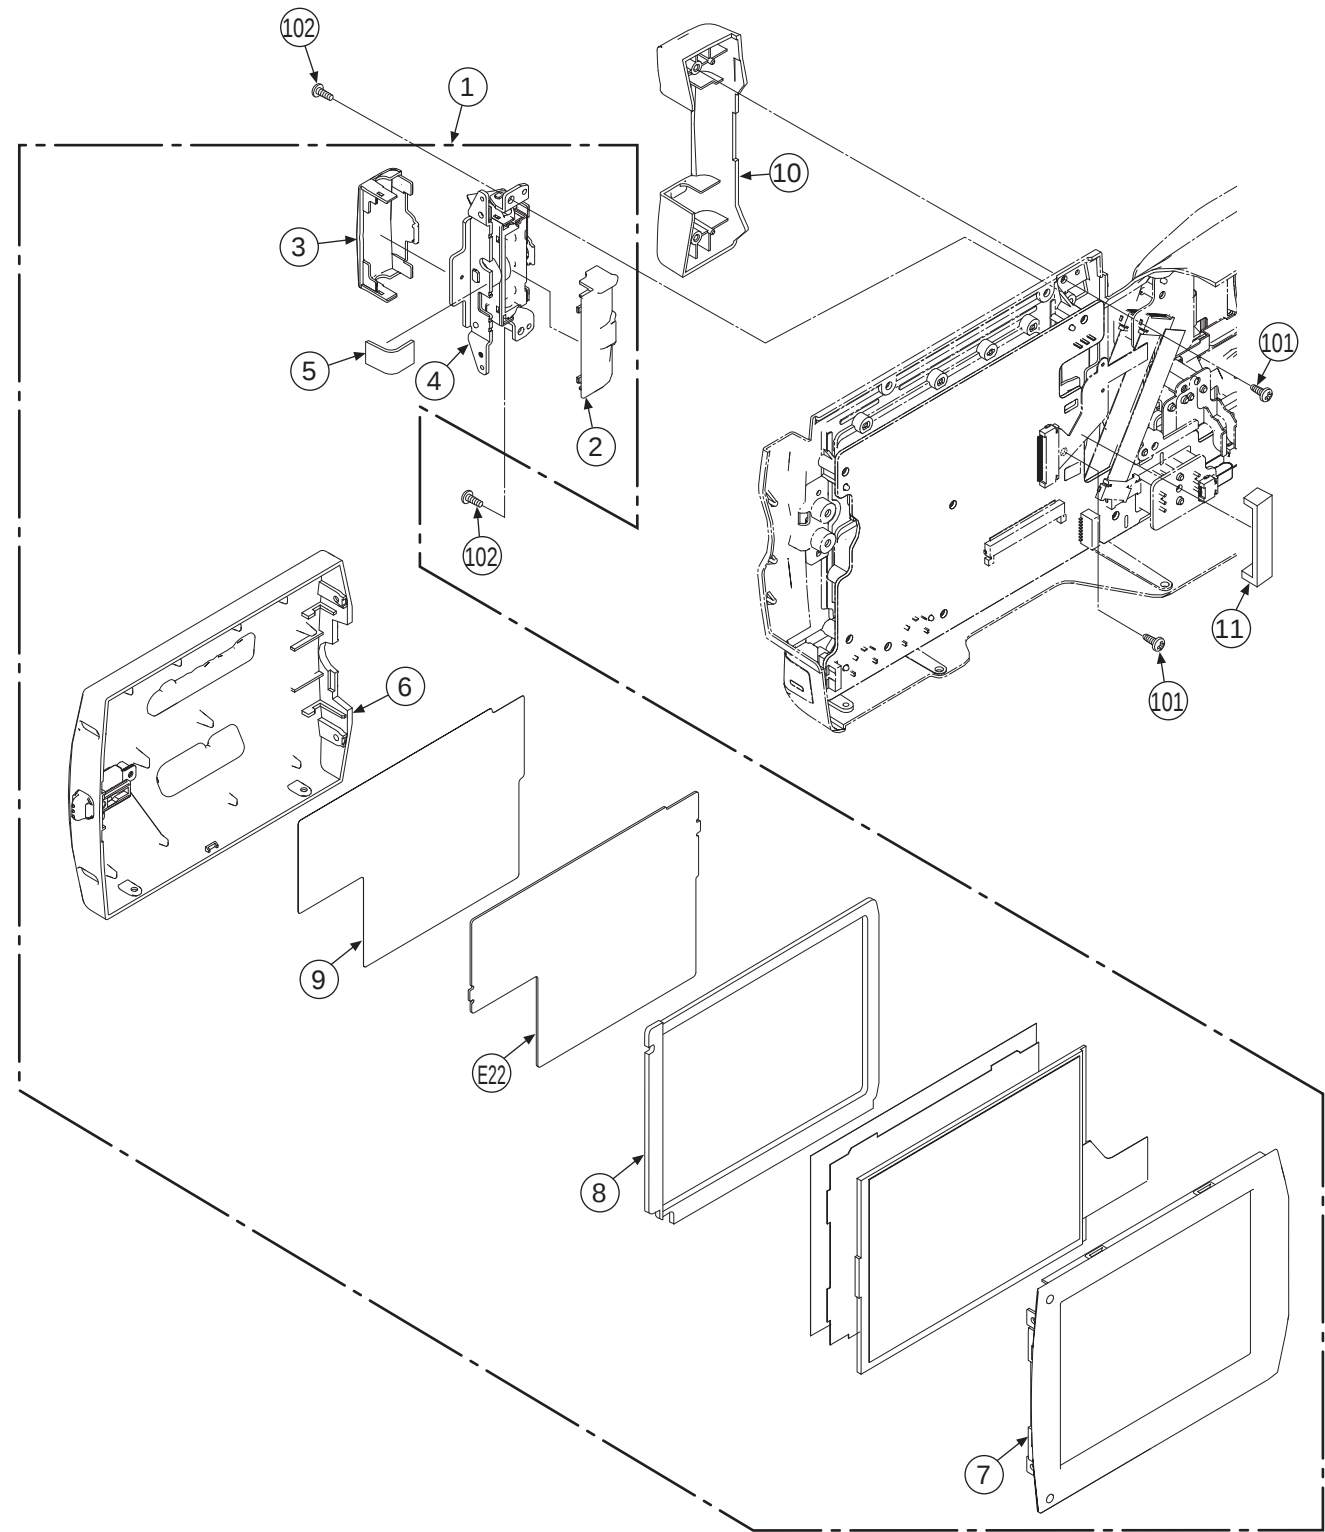


LCD PARTS ASSEMBLY

[illegible]

PACKING PARTS ASSEMBLY

Components identified with the mark  have the special characteristics for safety. When replacing any of these components, use only the same type.

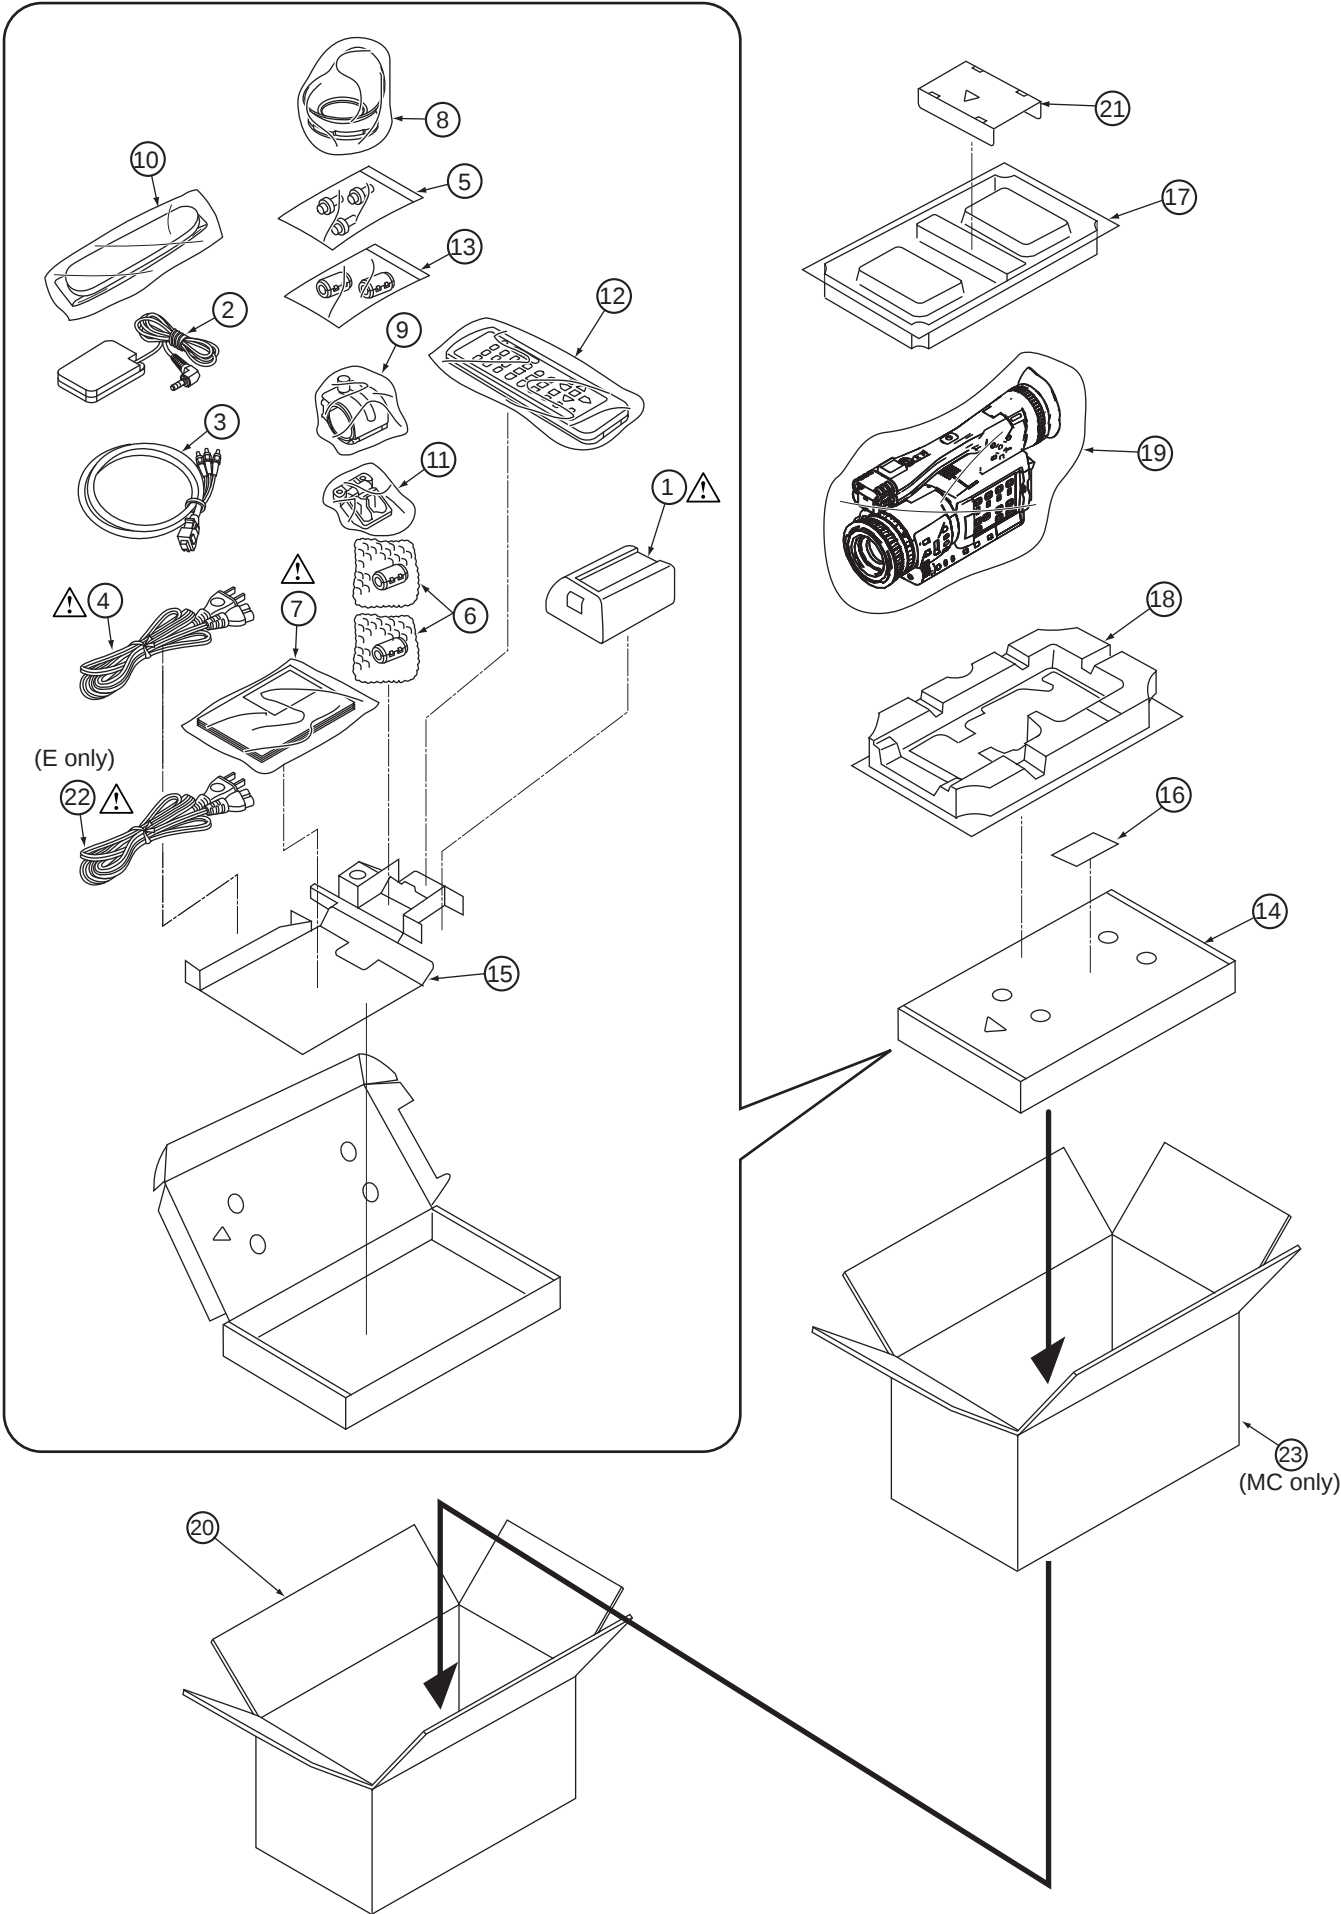

PACKING PARTS ASSEMBLY

Components identified with the mark have the special characteristics for safety. When replacing any of these components, use only the same type.

[illegible]

ELECTRICAL REPLACEMENT PARTS LIST

[illegible]

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
■ E1	VEB0864A	DIGITAL MAIN P. C. BOARD	1	(RTL) FOR AG-HPX170P/EN/MC
■ E1	VEP03H47A	DIGITAL MAIN P. C. BOARD	1	(RTL) FOR AG-HPX171E
C100, 01	ECJOEB1A104K	C. CAPACITOR CH 10V 0. 1U	2	
C102	ECJ1VB0J225K	C. CAPACITOR CH6. 3V 2. 2U	1	
C103	ECJOEB1A104K	C. CAPACITOR CH 10V 0. 1U	1	
C104, 05	ECJ1VB0J225K	C. CAPACITOR CH6. 3V 2. 2U	2	
C106	ECJOEB1A104K	C. CAPACITOR CH 10V 0. 1U	1	
C107	ECJ1VB0J225K	C. CAPACITOR CH6. 3V 2. 2U	1	
C109-11	ECJOEB1A104K	C. CAPACITOR CH 10V 0. 1U	3	
C112, 13	ECJOEB1C223K	C. CAPACITOR CH 16V 0. 022U	2	
C117, 18	ECJOEB1A104K	C. CAPACITOR CH 10V 0. 1U	2	
C119	ECJOEB1C223K	C. CAPACITOR CH 16V 0. 022U	1	
C120, 21	ECJOEB1A104K	C. CAPACITOR CH 10V 0. 1U	2	
C122	ECJOEB1C223K	C. CAPACITOR CH 16V 0. 022U	1	
C200, 01	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	2	
C202, 03	ECJ1VB0J225K	C. CAPACITOR CH6. 3V 2. 2U	2	
C204	ECJOEB1A104K	C. CAPACITOR CH 10V 0. 1U	1	
C205	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	1	
C206-13	ECJOEB1A104K	C. CAPACITOR CH 10V 0. 1U	8	
C214, 15	ECJOEB1C103K	C. CAPACITOR CH 16V 0. 01U	2	
C216-19	ECJOEB1A104K	C. CAPACITOR CH 10V 0. 1U	4	
C220, 21	ECJOEB1C103K	C. CAPACITOR CH 16V 0. 01U	2	
C222	ECJOEB1A104K	C. CAPACITOR CH 10V 0. 1U	1	
C223, 24	ECJOEB1C103K	C. CAPACITOR CH 16V 0. 01U	2	
C225	ECJOEB1A104K	C. CAPACITOR CH 10V 0. 1U	1	
C226, 27	ECJOEB1C103K	C. CAPACITOR CH 16V 0. 01U	2	
C228	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	1	
C229-31	ECJOEB1A104K	C. CAPACITOR CH 10V 0. 1U	3	
C232, 33	ECJOEC1H080D	C. CAPACITOR CH 50V 8P	2	
C234	ECJ1VB0J225K	C. CAPACITOR CH6. 3V 2. 2U	1	
C235	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	1	
C236	ECJOEB1A104K	C. CAPACITOR CH 10V 0. 1U	1	
C239	ECJOEB1C103K	C. CAPACITOR CH 16V 0. 01U	1	
C240-43	ECJOEB1A104K	C. CAPACITOR CH 10V 0. 1U	4	
C246-49	ECJOEB1A104K	C. CAPACITOR CH 10V 0. 1U	4	
C252-61	ECJOEB1A104K	C. CAPACITOR CH 10V 0. 1U	10	
C262	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	1	
C263	ECJOEB1A104K	C. CAPACITOR CH 10V 0. 1U	1	
C264	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	1	
C400-07	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	8	
C408-18	ECJOEB1A104K	C. CAPACITOR CH 10V 0. 1U	11	
C420, 21	ECJOEB1A104K	C. CAPACITOR CH 10V 0. 1U	2	
C422, 23	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	2	
C425-29	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	5	
C430	ECJ1VB0J225K	C. CAPACITOR CH6. 3V 2. 2U	1	
C431-40	ECJOEB1A104K	C. CAPACITOR CH 10V 0. 1U	10	
C441-44	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	4	
C445-48	ECJOEB1A104K	C. CAPACITOR CH 10V 0. 1U	4	
C452-54	ECJ1VB0J225K	C. CAPACITOR CH6. 3V 2. 2U	3	
C456	ECJOEB1A104K	C. CAPACITOR CH 10V 0. 1U	1	
C501	ECJOEB1A104K	C. CAPACITOR CH 10V 0. 1U	1	
C504	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1	
C505-08	ECJOEB1A104K	C. CAPACITOR CH 10V 0. 1U	4	
C510	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1	
C511-14	ECJOEB1A104K	C. CAPACITOR CH 10V 0. 1U	4	
C521-24	ECJOEB1A104K	C. CAPACITOR CH 10V 0. 1U	4	
C534	ECJOEB1A104K	C. CAPACITOR CH 10V 0. 1U	1	
C535	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	1	
C536	ECJOEB1A104K	C. CAPACITOR CH 10V 0. 1U	1	
C537	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	1	
C538	ECJOEB1A104K	C. CAPACITOR CH 10V 0. 1U	1	
C539	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	1	
C540	ECJOEB1A104K	C. CAPACITOR CH 10V 0. 1U	1	
C541	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	1	
C542	ECJOEB1A104K	C. CAPACITOR CH 10V 0. 1U	1	
C543	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	1	
C544	ECJOEB1A104K	C. CAPACITOR CH 10V 0. 1U	1	
C545	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	1	
C546	ECJOEB1A104K	C. CAPACITOR CH 10V 0. 1U	1	
C547	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	1	
C548	ECJOEB1A104K	C. CAPACITOR CH 10V 0. 1U	1	
C549	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	1	
C550	ECJOEB1A104K	C. CAPACITOR CH 10V 0. 1U	1	
C551	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	1	
C552	ECJOEB1A104K	C. CAPACITOR CH 10V 0. 1U	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks	Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
C553	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	1		C749	F3G1A476A019	T. CAPACITOR CH 10V 47U	1	
C554	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		C750	ECJOEC1H560J	C. CAPACITOR CH 50V 56P	1	
C555	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	1		C751	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1	
C556	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		C752	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
C557	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	1		C753	ECJ2FB0J106K	C. CAPACITOR CH 50V 10U	1	
C558	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		C754	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
C559	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	1		C755	ECJ2FB0J106K	C. CAPACITOR CH 50V 10U	1	
C560	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		C756	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
C561	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	1		C757	ECJOEB1E103K	C. CAPACITOR CH 25V 0.01U	1	
C562	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		C758	ECJ2FB0J106K	C. CAPACITOR CH 50V 10U	1	
C563	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	1		C759	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
C564	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		C760	ECJ2FB0J106K	C. CAPACITOR CH 50V 10U	1	
C565	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	1		C761	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
C566	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		C762	F3H1A107A060	T. CAPACITOR CH 10V 100U	1	
C567	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	1		C763	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1	
C568	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		C764	ECJ2FB0J106K	C. CAPACITOR CH 50V 10U	1	
C569	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	1		C765, 66	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	2	
C570	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		C767	ECJOEF1A224Z	C. CAPACITOR CH 10V 0.22U	1	
C571	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	1		C768, 69	ECJ2FB0J106K	C. CAPACITOR CH 50V 10U	2	
C572	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		C770	F1J1A335A003	C. CAPACITOR CH 10V 3.3U	1	
C573	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	1		C771	F3H1A107A060	T. CAPACITOR CH 10V 100U	1	
C574	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		C772	F1J1A335A003	C. CAPACITOR CH 10V 3.3U	1	
C575	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	1		C773	F3H1A107A060	T. CAPACITOR CH 10V 100U	1	
C576	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		C774	F1J1A335A003	C. CAPACITOR CH 10V 3.3U	1	
C577	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	1		C775	F3H1A107A060	T. CAPACITOR CH 10V 100U	1	
C578	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		C776	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
C579	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	1		C777-80	ECJ2FB1C225K	C. CAPACITOR CH 16V 2.2U	4	
C580	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		C800-03	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	4	
C581	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	1		C805	F3H1C106A063	T. CAPACITOR CH 10V 10U	1	
C582	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		C806	ECJOEB1C103K	C. CAPACITOR CH 16V 0.01U	1	
C583	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	1		C807	F3H1A336A070	T. CAPACITOR CH 10V 33U	1	
C584	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		C808-12	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	5	
C585	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	1		C813, 14	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	2	
C586	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		C815, 16	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	2	
C587	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	1		C817-19	ECJOEB1C103K	C. CAPACITOR CH 16V 0.01U	3	
C588	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		C820-22	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	3	
C589	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	1		C823-25	ECJOEB1C103K	C. CAPACITOR CH 16V 0.01U	3	
C590	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		C827-29	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	3	
C591	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	1		C830	ECJOEB1C103K	C. CAPACITOR CH 16V 0.01U	1	
C592	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		C831, 32	F1H0J475A009	C. CAPACITOR CH6.3V 4.7U	2	
C593	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	1		C901	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1	
C594, 95	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	2		C902	ECUX1A474KBV	C. CAPACITOR CH 10V 0.1U	1	
C596	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	1		C903	F1J0J475A008	C. CAPACITOR CH6.3V 4.7U	1	
C597	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		C904	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1	
C598	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	1		C905	ECJOEB1E103K	C. CAPACITOR CH 25V 0.01U	1	
C599	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		C907	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
C600	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	1		C908	F1L1A4760003	C. CAPACITOR CH 16V 47U	1	
C601	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		C909, 10	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	2	
C603-06	ECJ1VB0J225K	C. CAPACITOR CH6.3V 2.2U	4		C911	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1	
C607	ECJOEB1C103K	C. CAPACITOR CH 16V 0.01U	1		C912	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
C700-03	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	4		C913	ECJ2FB1C225K	C. CAPACITOR CH 16V 2.2U	1	
C704-06	ECJ1VB0J225K	C. CAPACITOR CH6.3V 2.2U	3		C915	F1L1A4760003	C. CAPACITOR CH 16V 47U	1	
C707	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1		C917, 18	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	2	
C708	ECJ1VB0J225K	C. CAPACITOR CH6.3V 2.2U	1		C919, 20	ECJOEF1C104Z	C. CAPACITOR CH 16V 0.1U	2	
C709, 10	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	2		C921, 22	F3G1A476A019	T. CAPACITOR CH 10V 47U	2	
C711	ECJ1VB0J225K	C. CAPACITOR CH6.3V 2.2U	1		C923	ECJ2FB0J106K	C. CAPACITOR CH 50V 10U	1	
C712-14	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	3		C924-27	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	4	
C715, 16	ECJ1VB0J225K	C. CAPACITOR CH6.3V 2.2U	2		C928	F3H1C476A049	T. CAPACITOR CH 16V 47U	1	
C717	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		C929, 30	ECJOEF1C104Z	C. CAPACITOR CH 16V 0.1U	2	
C718	ECJ1VB0J225K	C. CAPACITOR CH6.3V 2.2U	1		C931-34	ECJ3YB1E106K	C. CAPACITOR CH 25V 10U	4	
C719-24	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	6		C935	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1	
C725	ECJ1VB0J225K	C. CAPACITOR CH6.3V 2.2U	1		C936	ECJ2FB0J106K	C. CAPACITOR CH 50V 10U	1	
C726	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		C937	ECJOEF1C104Z	C. CAPACITOR CH 16V 0.1U	1	
C727-31	ECJ1VB0J225K	C. CAPACITOR CH6.3V 2.2U	5		C938	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
C732	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		C939, 40	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	2	
C733	ECJOEC1H220J	C. CAPACITOR CH 50V 22P	1		C941-43	ECJOEF1C104Z	C. CAPACITOR CH 16V 0.1U	3	
C734, 35	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	2		C944	F3H1V106A031	T. CAPACITOR CH 35V 10U	1	
C736	ECJOEB1E472K	C. CAPACITOR CH 25V 4700P	1		C945	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
C737	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		C946, 47	ECJ2FB0J106K	C. CAPACITOR CH 50V 10U	2	
C738-40	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	3		C948, 49	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	2	
C741, 42	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	2		C950, 51	ECJ2FB0J106K	C. CAPACITOR CH 50V 10U	2	
C743	ECJ2FB0J106K	C. CAPACITOR CH 50V 10U	1		C952	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
C744	ECJOEC1H220J	C. CAPACITOR CH 50V 22P	1		C953	ECJ2FB0J106K	C. CAPACITOR CH 50V 10U	1	
C745	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		C954, 55	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	2	
C746	ECJOEC1H680J	C. CAPACITOR CH 50V 68P	1		C956	ECJ2FB0J106K	C. CAPACITOR CH 50V 10U	1	
C747	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1		C957	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
C748	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		C958	ECJ2FB0J106K	C. CAPACITOR CH 50V 10U	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks	Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
C959	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		C1445	ECJ1VB0J225K	C. CAPACITOR CH6.3V 2.2U	1	
C960	ECJ2FB0J106K	C. CAPACITOR CH 50V 10U	1		C1446-49	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	4	
C961	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		C1450-53	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	4	
C962	ECJ2FB0J106K	C. CAPACITOR CH 50V 10U	1		C1454	ECJ1VB0J225K	C. CAPACITOR CH6.3V 2.2U	1	
C1000	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1		C1455	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
C1001, 02	ECJOEB1C103K	C. CAPACITOR CH 16V 0.01U	2		C1456	ECJ1VB0J225K	C. CAPACITOR CH6.3V 2.2U	1	
C1003	F3F1A226A026	T. CAPACITOR CH 10V 22U	1		C1457-60	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	4	
C1004	ECJOEB1C103K	C. CAPACITOR CH 16V 0.01U	1		C1461-64	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	4	
C1005	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		C1465	ECJ1VB0J225K	C. CAPACITOR CH6.3V 2.2U	1	
C1006	F3G1A476A019	T. CAPACITOR CH 10V 47U	1		C1466	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
C1007	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		C1467	ECJ1VB0J225K	C. CAPACITOR CH6.3V 2.2U	1	
C1008	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1		C1468-71	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	4	
C1009	ECJ2FB0J106K	C. CAPACITOR CH 50V 10U	1		C1472-75	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	4	
C1010	F3G1A476A019	T. CAPACITOR CH 10V 47U	1		C1500	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	1	
C1011	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		C1501	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
C1012	ECJOEC1H020C	T. CAPACITOR CH 50V 2P	1		C1502, 03	ECJ1VB0J225K	C. CAPACITOR CH6.3V 2.2U	2	
C1014	F3F1A226A026	T. CAPACITOR CH 10V 22U	1		C1504	ECJOEB1C103K	C. CAPACITOR CH 16V 0.01U	1	
C1015-18	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	4		C1505-13	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	9	
C1019	ECJOEB1C103K	C. CAPACITOR CH 16V 0.01U	1		C1514	ECJ1VB0J225K	C. CAPACITOR CH6.3V 2.2U	1	
C1020, 21	ECJOEC1H070D	C. CAPACITOR CH 50V 7P	2		C1515	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
C1022-30	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	9		C1516	ECJOEC1H330J	C. CAPACITOR CH 50V 33P	1	
C1031	ECJOEB1C103K	C. CAPACITOR CH 16V 0.01U	1		C1517	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1	
C1032	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		C1518	ECJOEC1H330J	C. CAPACITOR CH 50V 33P	1	
C1033	ECJOEB1C103K	C. CAPACITOR CH 16V 0.01U	1		C1519	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
C1034-38	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	5		C1520, 21	ECJOEB1C103K	C. CAPACITOR CH 16V 0.01U	2	
C1039	ECJOEB1C103K	C. CAPACITOR CH 16V 0.01U	1		C1522-28	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	7	
C1041	ECJOEB1C103K	C. CAPACITOR CH 16V 0.01U	1		C1529	ECJOEC1H080D	C. CAPACITOR CH 50V 8P	1	
C1042	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		C1530	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
C1043	ECJ1VB0J225K	C. CAPACITOR CH6.3V 2.2U	1		C1531	ECJOEC1H080D	C. CAPACITOR CH 50V 8P	1	
C1044	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		C1532	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
C1045, 46	ECJ1VB0J225K	C. CAPACITOR CH6.3V 2.2U	2		C1533-35	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	3	
C1047	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		C1536	ECJ1VB0J225K	C. CAPACITOR CH6.3V 2.2U	1	
C1048, 49	ECJ1VB0J225K	C. CAPACITOR CH6.3V 2.2U	2		C1537	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
C1050	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		C1538, 39	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	2	
C1051	ECJ1VB0J225K	C. CAPACITOR CH6.3V 2.2U	1		C1540	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
C1052, 53	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	2		C1541-43	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	3	
C1054-57	ECJOEB1C103K	C. CAPACITOR CH 16V 0.01U	4		C1544	ECJ1VB0J225K	C. CAPACITOR CH6.3V 2.2U	1	
C1058	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		C1545	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
C1059	ECJ1VB1C104K	C. CAPACITOR CH 16V 0.1U	1		C1546-49	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	4	
C1200, 01	ECJOEC1H080D	C. CAPACITOR CH 50V 8P	2		C1550	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
C1203	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1		C1551-59	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	9	
C1204	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		C1560	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
C1207	ECJ1VB0J225K	C. CAPACITOR CH6.3V 2.2U	1		C1561	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	1	
C1208	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		C1562, 63	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	2	
C1209, 10	ECJ1VB0J225K	C. CAPACITOR CH6.3V 2.2U	2		C1564	ECJ1VB0J225K	C. CAPACITOR CH6.3V 2.2U	1	
C1211	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		C1565	ECJ1VB1A224K	T. CAPACITOR CH 10V 0.22U	1	
C1212	ECJ1VB0J225K	C. CAPACITOR CH6.3V 2.2U	1		C1566, 67	ECJ1VB0J225K	C. CAPACITOR CH6.3V 2.2U	2	
C1213-18	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	6		C1568	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
C1219-24	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	6		C1569, 70	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	2	
C1225	ECJ1VB0J225K	C. CAPACITOR CH6.3V 2.2U	1		C1600, 01	ECJOEC1H080D	C. CAPACITOR CH 50V 8P	2	
C1226	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		C1602	F3F1A226A026	T. CAPACITOR CH 10V 22U	1	
C1227, 28	ECJ1VB0J225K	C. CAPACITOR CH6.3V 2.2U	2		C1603	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
C1229	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	1		C1604	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	1	
C1230	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		C1605, 06	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	2	
C1231-33	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	3		C1607	ECJOEB1H221K	C. CAPACITOR CH 50V 220P	1	
C1234-36	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	3		C1608	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1	
C1237	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	1		C1609	ECJ1VB0J225K	C. CAPACITOR CH6.3V 2.2U	1	
C1238	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		C1610	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
C1239-41	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	3		C1611	ECJ1VB0J225K	C. CAPACITOR CH6.3V 2.2U	1	
C1242-44	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	3		C1612-14	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	3	
C1245-48	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	4		C1615-17	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	3	
C1249-58	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	10		C1618	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	1	
C1259-68	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	10		C1619-23	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	5	
C1269-78	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	10		C1624-28	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	5	
C1279-84	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	6		C1629-33	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	5	
C1420	ECJ1VB0J225K	C. CAPACITOR CH6.3V 2.2U	1		C1634-40	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	7	
C1421	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		C1641-43	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	3	
C1422	ECJ1VB0J225K	C. CAPACITOR CH6.3V 2.2U	1		C1700	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	1	
C1424-27	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	4		C1701	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
C1428-31	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	4		C1702	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	1	
C1432	ECJ1VB0J225K	C. CAPACITOR CH6.3V 2.2U	1		C1703-06	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	4	
C1433	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		C1707-11	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	5	
C1434	ECJ1VB0J225K	C. CAPACITOR CH6.3V 2.2U	1		C1712	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
C1435-38	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	4		C1713, 14	ECJOEC1H060D	C. CAPACITOR CH 50V 6P	2	
C1439-42	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	4		C1715-19	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	5	
C1443	ECJ1VB0J225K	C. CAPACITOR CH6.3V 2.2U	1		C1720, 21	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	2	
C1444	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		C1722, 23	ECJOEB1H271K	C. CAPACITOR CH 50V 270P	2	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks	Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
C1724	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		FL1700, 01	F1H0J1050022	C. CAPACITOR CH6.3V 1U	2	
C1725, 26	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	2		IC100	COJBZA0002192	IC	1	
C1727, 28	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	2		IC101	COEBA0000039	IC	1	
C1729	ECJ1VB0J225K	C. CAPACITOR CH6.3V 2.2U	1		IC103	COEBD0000224	IC	1	
C1730	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		IC104	COEBE0000348	IC	1	
C1731, 32	ECJ1VB0J225K	C. CAPACITOR CH6.3V 2.2U	2		IC106	COEBE0000348	IC	1	
C1733	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		IC107	COEBA0000039	IC	1	
C1734	ECJ1VB0J225K	C. CAPACITOR CH6.3V 2.2U	1		IC108	COEBC0000156	IC	1	
C1800-02	ECJ1VB0J225K	C. CAPACITOR CH6.3V 2.2U	3		IC209	COJBAB000660	IC	1	
C1803, 04	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	2		IC213-15	COJBAA000362	IC	3	
C1805	ECJ2FB1C225K	C. CAPACITOR CH 16V 2.2U	1		IC400	C1AB00002486	IC	1	
C1806	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		IC401	COJBAB000660	IC	1	
C1809	F1L1E1050001	C. CAPACITOR CH 25V 1U	1		IC402	COCBAC000072	IC	1	
C1810, 11	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	2		IC403	COJBAU000031	IC	1	
C1815	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1		IC500	C1ZBZ0003923	IC	1	
C1817-19	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	3		IC501	COJBZA0002192	IC	1	
C1820	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1		IC506	COJBAA000307	IC	1	
C1821, 22	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	2		IC507	COCBAC000061	IC	1	
C1823	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1		IC700	COCBAC000084	IC	1	
C1824-26	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	3		IC701	COCBBC000053	IC	1	
C1827	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1		IC702	COCBDC000008	IC	1	
C1828, 29	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	2		IC703	COFBBF000069	IC	1	
C1831	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		IC704	COFBZH000020	IC	1	
C1832	ECJOEC1H101J	C. CAPACITOR CH 50V 100P	1		IC801	COCBAC000039	IC	1	
C1833-35	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	3		IC802	C1ZBZ0003926	IC	1	
C1837	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		IC803	COCBBC000049	IC	1	
C1839	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		IC900	COFBY0000039	IC	1	
C1840	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1		IC901	C1AB00002729	IC	1	
C1901	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		IC902, 03	COJBZA000602	IC	2	
C1902-05	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	4		IC904	COABBB000271	IC	1	
C1906, 07	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	2		IC905	COABAB000121	IC	1	
C1908, 09	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	2		IC906	COABBB000271	IC	1	
C1910-13	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	4		IC907	COABAB000121	IC	1	
C1914	ECJ2FB1H104K	C. CAPACITOR CH 50V 0.1U	1		IC908	AN77L09M	IC	1	
C1915	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		IC909	COCBBC000053	IC	1	
C1916	ECJ1VB0J225K	C. CAPACITOR CH6.3V 2.2U	1		IC1005-07	COJBAA000362	IC	3	
C1917	ECJ2FB1H104K	C. CAPACITOR CH 50V 0.1U	1		IC1009	C1ZBZ0002602	IC	1	
C1918-25	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	8		IC1010	COEBE0000240	IC	1	
C1927	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		IC1011	COEBK0000066	IC	1	
C2100, 01	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	2		IC1204	C1AB00002377	IC	1	
C2102-04	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	3		IC1205	COCBAC000072	IC	1	
CN100	K1KAC0AA0045	CONNECTOR (MALE)	1		IC1400-04	C3ABRY000032	IC	5	
CN101	K1KA50AA0240	CONNECTOR (MALE)	1		IC1500	COCBBC000048	IC	1	
CN102	K1KA70BA0028	CONNECTOR (FEMALE)	1		IC1501	COZBZ0000830	IC	1	
CN103	K1KAC0AA0592	CONNECTOR (MALE)	1		IC1502	BH7086KV	IC	1	
CN104	K1KB30AA0006	CONNECTOR (FEMALE)	1		IC1503	COFBZY000002	IC	1	
CN901	K1KY08AA0710	CONNECTOR	1		IC1505	C1ZBZ0002771	IC	1	
CN2000, 01	K1MR70B00003	CONNECTOR	2		IC1506	COJBAU000031	IC	1	
CN2002	K1MR70B00004	CONNECTOR	1		IC1507	COJBZA0002934	IC	1	
CN2003	K1KB50BA0015	CONNECTOR (FEMALE)	1		IC1508	COJBAU000031	IC	1	
CN2100	K1MN10BA0059	CONNECTOR	1		IC1509, 10	COJBAB000662	IC	2	
CN2101	K1MN50AA0018	CONNECTOR	1		IC1511, 12	COJBAB000660	IC	2	
CN2103	K1MN61BA0132	CONNECTOR	1		IC1513, 14	COJBAB000662	IC	2	
CN2105	K1MN30AA0018	CONNECTOR	1		IC1515	COJBAU000031	IC	1	
CN2106	K1MN40BA0079	CONNECTOR	1		IC1516	COJBAA000374	IC	1	
D100, 01	D4ED1270A008	VARIATOR	2		IC1517	COCBBC000053	IC	1	
D103	MA2SD2400L	D1ODE	1		IC1600	C1DB00000956	IC	1	
D104	D4ED1270A008	VARIATOR	1		IC1702	C1DB00001225	IC	1	
D900	MA3J14300L	D1ODE	1		IC1703	COJBAA000362	IC	1	
D901-03	MA142WK	D1ODE	3		IC1801	COJBAC000362	IC	1	
D904, 05	MA3J142D0L	D1ODE	2		IC1803	COCBBC000053	IC	1	
D906	MA111	D1ODE	1		IC1804	COCBAGE00012	IC	1	
D1001	MA2SD2400L	D1ODE	1		IC1807	COJBZA0001591	IC	1	
D1003	MA3J14700L	D1ODE	1		IC1808	COJBAU000031	IC	1	
D1005	MA2SD2400L	D1ODE	1		IC1811	C1AB00002388	IC	1	
D1006-09	MA3J14700L	D1ODE	4		IC1812	COJBZA0001539	IC	1	
D1200	MA111	D1ODE	1		IC1900	COJBZA0002276	IC	1	
D1500	MA111	D1ODE	1		IC1901-04	COJBAF000625	IC	4	
D1800	MA3J14700L	D1ODE	1		IC1905	COABHA000020	IC	1	
FL401-03	F1H0J1050022	C. CAPACITOR CH6.3V 1U	3		IC1907, 08	COJBAA000307	IC	2	
FL500-03	F1H0J1050022	C. CAPACITOR CH6.3V 1U	4		IC1909	COJBAA000374	IC	1	
FL1000	F1H0J1050022	C. CAPACITOR CH6.3V 1U	1		IC1910, 11	COJBAA000307	IC	2	
FL1200, 01	F1H0J1050022	C. CAPACITOR CH6.3V 1U	2		IC1912, 13	COJBAA000374	IC	2	
FL1600	F1H0J1050022	C. CAPACITOR CH6.3V 1U	1		IC1915-17	COCBBC000053	IC	3	
					IC1918	COJBAU000031	IC	1	
					IC1921	COJBZA000851	IC	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks	Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
IC2100, 01	COJBAZ001539	IC	2		R146	ERJ2GEJ100	M. RESISTOR CH 1/16W 10	1	
IC2102	COJBAB000660	IC	1		R147	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	1	
					R200-02	DOYAR0000007	M. RESISTOR CH 1/16W 0	3	
IP200, 01	C3EBJG000001	IC	2		R203-05	ERJ2RHD183	M. RESISTOR CH 1/16W 18K	3	
IP1013	C3EBGG000016	IC	1		R206-08	ERJ2RHD153	M. RESISTOR CH 1/16W 15K	3	
					R209	DOYAR0000007	M. RESISTOR CH 1/16W 0	1	
JK800	VJP4131	CONNECTOR (MALE)	1		R210	ERJ2GEJ101	M. RESISTOR CH 1/16W 100	1	
					R211-13	DOYAR0000007	M. RESISTOR CH 1/16W 0	3	
L100, 01	JOJDC0000102	ELECTRICAL FILTERFILTER	2		R214, 15	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	2	
L200	JOJHC0000032	ELECTRICAL FILTERFILTER	1		R216	DOYAR0000007	M. RESISTOR CH 1/16W 0	1	
L201-03	JOJDC0000102	ELECTRICAL FILTERFILTER	3		R217, 18	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	2	
L400	JOJDC0000102	ELECTRICAL FILTERFILTER	1		R219	DOYAR0000007	M. RESISTOR CH 1/16W 0	1	
L402	JOJDC0000102	ELECTRICAL FILTERFILTER	1		R220, 21	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	2	
L403	JOJHC0000032	ELECTRICAL FILTERFILTER	1		R222	DOYAR0000007	M. RESISTOR CH 1/16W 0	1	
L404-06	JOJDC0000102	ELECTRICAL FILTERFILTER	3		R223, 24	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	2	
L501-13	JOJDC0000102	ELECTRICAL FILTERFILTER	13		R225	ERJ2GEJ102	M. RESISTOR CH 1/16W 1K	1	
L514	JOJHC0000032	ELECTRICAL FILTERFILTER	1		R226, 27	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	2	
L700-05	JOJDC0000102	ELECTRICAL FILTERFILTER	6		R228, 29	ERJ2GEJ105	M. RESISTOR CH 1/16W 1M	2	
L706	G1C100KA0115	COIL 10UH	1		R235	ERJ2GEJ102	M. RESISTOR CH 1/16W 1K	1	
L707	G1C220JA0041	COIL 22UH	1		R236	ERJ2GEJ105	M. RESISTOR CH 1/16W 1M	1	
L708	G1C100KA0115	COIL 10UH	1		R237	ERJ2GEJ471	M. RESISTOR CH 1/16W 470	1	
L709	G1C220JA0041	COIL 22UH	1		R238	DOYAR0000007	M. RESISTOR CH 1/16W 0	1	
L710	G1C6R8JA0041	COIL 6.8UH	1		R240, 41	ERJ2GEJ102	M. RESISTOR CH 1/16W 1K	2	
L711-16	G1C100KA0115	COIL 10UH	6		R251, 52	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	2	
L800	JOJDC0000102	ELECTRICAL FILTERFILTER	1		R253	DOYAR0000007	M. RESISTOR CH 1/16W 0	1	
L802-04	JOJDC0000102	ELECTRICAL FILTERFILTER	3		R270-72	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	3	
L805, 06	G1C4N7Z00007	COIL 4.7UH	2		R273, 74	ERJ2GEJ153	M. RESISTOR CH 1/16W 15K	2	
L807, 08	JOJDC0000102	ELECTRICAL FILTERFILTER	2		R275-77	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	3	
L900	JOJDC0000102	ELECTRICAL FILTERFILTER	1		R278	ERJ2GEJ102	M. RESISTOR CH 1/16W 1K	1	
L902	JOJHC0000032	ELECTRICAL FILTERFILTER	1		R283, 84	ERJ2GEJ222	M. RESISTOR CH 1/16W 2.2K	2	
L903, 04	JOJDC0000102	ELECTRICAL FILTERFILTER	2		R285, 86	ERJ2GEJ102	M. RESISTOR CH 1/16W 1K	2	
L905	G1C100KA0115	COIL 10UH	1		R287	ERJ2GEJ332	M. RESISTOR CH 1/16W 3.3K	1	
L906, 07	JOJHC0000032	ELECTRICAL FILTERFILTER	2		R288, 89	DOYAR0000007	M. RESISTOR CH 1/16W 0	2	
L1000-05	JOJDC0000102	ELECTRICAL FILTERFILTER	6		R290	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1	
L1200, 01	JOJHC0000032	ELECTRICAL FILTERFILTER	2		R291, 92	ERJ2GEJ222	M. RESISTOR CH 1/16W 2.2K	2	
L1202, 03	JOJDC0000102	ELECTRICAL FILTERFILTER	2		R293, 94	ERJ2GEJ102	M. RESISTOR CH 1/16W 1K	2	
L1204	JOJHC0000032	ELECTRICAL FILTERFILTER	1		R298	EXB28V103J	COMBI. R-R 10K	1	
L1410-14	JOJDC0000102	ELECTRICAL FILTERFILTER	5		R299	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	1	
L1500	G1C120JA0041	COIL 12UH	1		R300, 01	EXB28V102J	COMBI. R-R 1K	2	
L1502-08	JOJDC0000102	ELECTRICAL FILTERFILTER	7		R302	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1	
L1600	JOJDC0000102	ELECTRICAL FILTERFILTER	1		R303	DOYAR0000007	M. RESISTOR CH 1/16W 0	1	
L1604-07	JOJDC0000102	ELECTRICAL FILTERFILTER	4		R304	ERJ2GEJ101	M. RESISTOR CH 1/16W 100	1	
L1701, 02	JOJAB0000212	ELECTRICAL FILTER	2		R305	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1	
L1703, 04	JOJDC0000102	ELECTRICAL FILTERFILTER	2		R306-08	ERJ2GEJ101	M. RESISTOR CH 1/16W 100	3	
L1800-06	JOJDC0000102	ELECTRICAL FILTERFILTER	7		R309, 10	ERJ2GEJ102	M. RESISTOR CH 1/16W 1K	2	
L1900-11	JOJDC0000102	ELECTRICAL FILTERFILTER	12		R311	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	1	
L2100, 01	JOJDC0000102	ELECTRICAL FILTERFILTER	2		R314, 15	DOYAR0000007	M. RESISTOR CH 1/16W 0	2	
					R316-19	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	4	
Q200-02	XN0460100L	TRANSISTOR-RESISTOR	3		R320	EXB28V102J	COMBI. R-R 1K	1	
Q204	UNR9211J0L	TRANSISTOR	1		R321, 22	EXB28V473J	COMBI. R-R 47K	2	
Q900-05	UNR9213J0L	TRANSISTOR	6		R403	DOYAR0000007	M. RESISTOR CH 1/16W 0	1	
Q906-10	UNR9113J0L	TRANSISTOR	5		R406-11	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	6	
Q911	UNR9213J0L	TRANSISTOR	1		R412-14	DOYAR0000007	M. RESISTOR CH 1/16W 0	3	
Q912	UNR9113J0L	TRANSISTOR	1		R416	DOYAR0000007	M. RESISTOR CH 1/16W 0	1	
Q913, 14	2SB1219A0L	TRANSISTOR	2		R419	DOYAR0000007	M. RESISTOR CH 1/16W 0	1	
Q915-18	2SD197900L	TRANSISTOR	4		R420	ERJ2GEJ470	M. RESISTOR CH 1/16W 47	1	
Q1000	2SB0970X0L	TRANSISTOR	1		R421	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1	
Q1001	UNR211500L	TRANSISTOR	1		R422, 23	DOYAR0000007	M. RESISTOR CH 1/16W 0	2	
Q1002, 03	XP0411500L	TRANSISTOR	2		R424	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1	
Q1006	UNR9214J0L	TRANSISTOR	1		R425	DOYAR0000007	M. RESISTOR CH 1/16W 0	1	
Q1007	UNR9213J0L	TRANSISTOR	1		R429, 30	DOYAR0000007	M. RESISTOR CH 1/16W 0	2	
Q1800	XP0431N00L	TRANSISTOR	1		R435	ERJ2GEJ330	M. RESISTOR CH 1/16W 33	1	
Q1801	2SD2216J0L	TRANSISTOR	1		R436	DOYAR0000007	M. RESISTOR CH 1/16W 0	1	
Q1802	2SB1462J0L	TRANSISTOR	1		R437-41	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	5	
Q1803, 04	XP0431N00L	TRANSISTOR	2		R442-45	EXB28V470J	COMBI. R-R 47	4	
					R446-55	EXB28V220J	COMBI. R-R 22	10	
R100, 01	DOYAR0000007	M. RESISTOR CH 1/16W 0	2		R458, 59	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	2	
R102	ERJ2GEJ472	M. RESISTOR CH 1/16W 4.7K	1		R460	DOYAR0000007	M. RESISTOR CH 1/16W 0	1	
R103-08	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	6		R461-64	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	4	
R109	EXB28V102J	COMBI. R-R 1K	1		R467	EXB28V220J	COMBI. R-R 22	1	
R111, 12	DOYAR0000007	M. RESISTOR CH 1/16W 0	2		R468-71	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	4	
R114-17	DOYAR0000007	M. RESISTOR CH 1/16W 0	4		R472, 73	DOYAR0000007	M. RESISTOR CH 1/16W 0	2	
R120-28	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	9		R474	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	1	
R129-32	DOYAR0000007	M. RESISTOR CH 1/16W 0	4		R501	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	1	
R133, 34	ERJ2GEJ100	M. RESISTOR CH 1/16W 10	2		R504	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	1	
R135, 36	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	2		R505-10	EXB28V220J	COMBI. R-R 22	6	
R144, 45	DOYAR0000007	M. RESISTOR CH 1/16W 0	2		R516	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks	Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
R517	ERJ2GEJ470	M. RESISTOR CH 1/16W 47	1		R933	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	1	
R518-23	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	6		R934-36	ERJ2RHD104	M. RESISTOR CH 1/16W 100K	3	
R524	EXB28V103J	COMBI. R-R	10K	1	R938	ERJ2GEJ105	M. RESISTOR CH 1/16W 1M	1	
R526	DOYAR0000007	M. RESISTOR CH 1/16W 0	1		R939-42	ERJ2RHD104	M. RESISTOR CH 1/16W 100K	4	
R529	DOYAR0000007	M. RESISTOR CH 1/16W 0	1		R943, 44	ERJ2RHD392	M. RESISTOR CH 1/16W 3.9K	2	
R531-33	DOYAR0000007	M. RESISTOR CH 1/16W 0	3		R945, 46	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	2	
R534	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1		R947, 48	ERJ2RHD132		2	
R535	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	1		R949, 50	ERJ2RHD104	M. RESISTOR CH 1/16W 100K	2	
R537	ERJ2GEJ101	M. RESISTOR CH 1/16W 100	1		R951, 52	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	2	
R538, 39	DOYAR0000007	M. RESISTOR CH 1/16W 0	2		R953-64	ERJ2RHD333	M. RESISTOR CH 1/16W 33K	12	
R540-42	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	3		R970-73	ERJ2RHD104	M. RESISTOR CH 1/16W 100K	4	
R544, 45	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	2		R974-76	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	3	
R546-51	EXB28V220J	COMBI. R-R	22	6	R977	DOYAR0000007	M. RESISTOR CH 1/16W 0	1	
R559	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	1		R979	DOYAR0000007	M. RESISTOR CH 1/16W 0	1	
R560-64	EXB28V220J	COMBI. R-R	22	5	R1001	ERJ3GEYJ561	M. RESISTOR CH 1/16W 560	1	
R565, 66	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	2		R1003	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1	
R567	ERJ2GEJ470	M. RESISTOR CH 1/16W 47	1		R1004	ERJ2RHD223	M. RESISTOR CH 1/16W 22K	1	
R568, 69	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	2		R1006-11	DOYAR0000007	M. RESISTOR CH 1/16W 0	6	
R571-74	DOYAR0000007	M. RESISTOR CH 1/16W 0	4		R1012	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1	
R575	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	1		R1014	ERJ2GEJ104	M. RESISTOR CH 1/16W 100K	1	
R576-79	DOYAR0000007	M. RESISTOR CH 1/16W 0	4		R1015	DOYAR0000007	M. RESISTOR CH 1/16W 0	1	
R580	ERJ2GEJ100X	M. RESISTOR CH 1/16W 10	1		R1016	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1	
R581-87	DOYAR0000007	M. RESISTOR CH 1/16W 0	7		R1017	DOYAR0000007	M. RESISTOR CH 1/16W 0	1	
R588, 89	ERJ2GEJ101	M. RESISTOR CH 1/16W 100	2		R1020	ERJ2GEJ102	M. RESISTOR CH 1/16W 1K	1	
R700	DOYAR0000007	M. RESISTOR CH 1/16W 0	1		R1021, 22	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	2	
R703-09	DOYAR0000007	M. RESISTOR CH 1/16W 0	7		R1023	ERJ2GEJ474	M. RESISTOR CH 1/16W 470K	1	
R710	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1		R1024	EXB28V473J	COMBI. R-R	47K	1
R711	DOYAR0000007	M. RESISTOR CH 1/16W 0	1		R1025	DOYAR0000007	M. RESISTOR CH 1/16W 0	1	
R713	ERJ2GEJ102	M. RESISTOR CH 1/16W 1K	1		R1027	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1	
R714	ERJ2RHD392	M. RESISTOR CH 1/16W 3.9K	1		R1028	ERJ2GEJ393	M. RESISTOR CH 1/16W 39K	1	
R715	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1		R1029	DOYAR0000007	M. RESISTOR CH 1/16W 0	1	
R716	ERJ2RHD301	M. RESISTOR CH 1/16W 300	1		R1032	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1	
R717	ERJ2RHD151	M. RESISTOR CH 1/16W 150	1		R1033	DOYAR0000007	M. RESISTOR CH 1/16W 0	1	
R718, 19	ERJ2RHD301	M. RESISTOR CH 1/16W 300	2		R1034	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1	
R720, 21	DOYAR0000007	M. RESISTOR CH 1/16W 0	2		R1035, 36	DOYAR0000007	M. RESISTOR CH 1/16W 0	2	
R723	ERJ3GEYJ3R3	M. RESISTOR CH 1/16W 3.3	1		R1038	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	1	
R724, 25	DOYAR0000007	M. RESISTOR CH 1/16W 0	2		R1040	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1	
R726, 27	ERJ2RHD301	M. RESISTOR CH 1/16W 300	2		R1041-43	EXB28V103J	COMBI. R-R	10K	3
R728	DOYAR0000007	M. RESISTOR CH 1/16W 0	1		R1044	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	1	
R729	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1		R1045	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1	
R730, 31	ERJ2GEJ221	M. RESISTOR CH 1/16W 220	2		R1046	EXB28V473J	COMBI. R-R	47K	1
R732	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1		R1047, 48	ERJ2GEJ101	M. RESISTOR CH 1/16W 100	2	
R733	ERJ2GEJ221	M. RESISTOR CH 1/16W 220	1		R1049-51	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	3	
R734, 35	DOYAR0000007	M. RESISTOR CH 1/16W 0	2		R1052	ERJ2GEJ102	M. RESISTOR CH 1/16W 1K	1	
R736	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1		R1053	ERJ2GEJ105	M. RESISTOR CH 1/16W 1M	1	
R737, 38	ERJ2RHD301	M. RESISTOR CH 1/16W 300	2		R1054	ERJ2GEJ101	M. RESISTOR CH 1/16W 100	1	
R739	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	1		R1055	DOYAR0000007	M. RESISTOR CH 1/16W 0	1	
R741	DOYAR0000007	M. RESISTOR CH 1/16W 0	1		R1056	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1	
R742	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1		R1057	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	1	
R743	ERJ3RED750	M. RESISTOR CH 1/16W 75	1		R1058	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	1	
R744-46	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	3		R1059, 60	ERJ2GEJ470	M. RESISTOR CH 1/16W 47	2	
R747-49	ERJ3RED750	M. RESISTOR CH 1/16W 75	3		R1061-64	ERJ2GEJ330	M. RESISTOR CH 1/16W 33	4	
R801	DOYAR0000007	M. RESISTOR CH 1/16W 0	1		R1065	ERJ2GEJ102	M. RESISTOR CH 1/16W 1K	1	
R803	ERJ3GEYJ6R8	M. RESISTOR CH 1/16W 6.8	1		R1066	EXB28V473J	COMBI. R-R	47K	1
R804	ERJ3GEYJ3R3	M. RESISTOR CH 1/16W 3.3	1		R1067	ERJ2GEJ102	M. RESISTOR CH 1/16W 1K	1	
R805	ERJ3EKF1002	M. RESISTOR CH 1/16W 10K	1		R1068	ERJ2GEJ152	M. RESISTOR CH 1/16W 1.5K	1	
R806-10	DOYAR0000007	M. RESISTOR CH 1/16W 0	5		R1069-71	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	3	
R812-20	DOYAR0000007	M. RESISTOR CH 1/16W 0	9		R1072	ERJ2GEJ152	M. RESISTOR CH 1/16W 1.5K	1	
R821	ERJ3RBD751	M. RESISTOR CH 1/16W 750	1		R1073	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1	
R822, 23	ERJ3RBD750	M. RESISTOR CH 1/16W 75	2		R1074, 75	ERJ2GEJ332	M. RESISTOR CH 1/16W 3.3K	2	
R824, 25	ERJ3RBD151	M. RESISTOR CH 1/16W 150	2		R1076	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1	
R826	ERJ3RED750	M. RESISTOR CH 1/16W 75	1		R1077	ERJ2GEJ105	M. RESISTOR CH 1/16W 1M	1	
R827-34	ERJ2GEJ221	M. RESISTOR CH 1/16W 220	8		R1078	ERJ2GEJ474	M. RESISTOR CH 1/16W 470K	1	
R835-41	DOYAR0000007	M. RESISTOR CH 1/16W 0	7		R1079-82	EXB28V330J	COMBI. R-R	33	4
R900-03	ERJ2GEJ221	M. RESISTOR CH 1/16W 220	4		R1083	DOYAR0000007	M. RESISTOR CH 1/16W 0	1	
R904	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	1		R1084-87	EXB28V330J	COMBI. R-R	33	4
R905-08	ERJ2RHD104	M. RESISTOR CH 1/16W 100K	4		R1088	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1	
R909	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	1		R1089	ERJ2GEJ822	M. RESISTOR CH 1/16W 8.2K	1	
R910	ERJ2RHD333	M. RESISTOR CH 1/16W 33K	1		R1090, 91	DOYAR0000007	M. RESISTOR CH 1/16W 0	2	
R911	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	1		R1092	ERJ2GEJ102	M. RESISTOR CH 1/16W 1K	1	
R912	ERJ2RHD683	M. RESISTOR CH 1/16W 68K	1		R1093	DOYAR0000007	M. RESISTOR CH 1/16W 0	1	
R913-20	ERJ2RHD333	M. RESISTOR CH 1/16W 33K	8		R1094	ERJ2GEJ105	M. RESISTOR CH 1/16W 1M	1	
R922, 23	ERJ3GEYJ561	M. RESISTOR CH 1/16W 560	2		R1095	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	1	
R925-28	ERJ6GEYJ680	M. RESISTOR CH 1/10W 68	4		R1096	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1	
R929	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	1		R1097	ERJ2GEJ472	M. RESISTOR CH 1/16W 4.7K	1	
R930, 31	ERJ2RHD104	M. RESISTOR CH 1/16W 100K	2		R1098-00	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	3	
R932	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1		R1101	DOYAR0000007	M. RESISTOR CH 1/16W 0	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks	Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
R1103	DOYAR0000007	M. RESISTOR CH 1/16W	0	1	R1532, 33	ERJ2GEJ105	M. RESISTOR CH 1/16W	1M	2
R1105, 06	ERJ2GEJ103	M. RESISTOR CH 1/16W	10K	2	R1534	DOYAR0000007	M. RESISTOR CH 1/16W	0	1
R1108	ERJ2GEJ100	M. RESISTOR CH 1/16W	10	1	R1535, 36	ERJ2GEJ220	M. RESISTOR CH 1/16W	22	2
R1109	ERJ2GEJ102	M. RESISTOR CH 1/16W	1K	1	R1537, 38	ERJ2GEJ330	M. RESISTOR CH 1/16W	33	2
R1110	ERJ2GEJ473	M. RESISTOR CH 1/16W	47K	1	R1540	ERJ2GEJ100	M. RESISTOR CH 1/16W	10	1
R1201-04	EXB28V820J	COMBI. R-R	82	4	R1541	ERJ2GEJ560	M. RESISTOR CH 1/16W	56	1
R1205-08	EXB28V470J	COMBI. R-R	47	4	R1542, 43	ERJ2GEJ470	M. RESISTOR CH 1/16W	47	2
R1209-11	EXB28V100J	COMBI. R-R	10	3	R1545	ERJ2GEJ105	M. RESISTOR CH 1/16W	1M	1
R1212	ERJ2GEJ100	M. RESISTOR CH 1/16W	10	1	R1547	DOYAR0000007	M. RESISTOR CH 1/16W	0	1
R1213-17	ERJ2GEJ470	M. RESISTOR CH 1/16W	47	5	R1548	ERJ2GEJ681	M. RESISTOR CH 1/16W	680	1
R1218	ERJ2GEJ103	M. RESISTOR CH 1/16W	10K	1	R1549	ERJ2GEJ473	M. RESISTOR CH 1/16W	47K	1
R1219-23	ERJ2GEJ100	M. RESISTOR CH 1/16W	10	5	R1550	ERJ2GEJ100	M. RESISTOR CH 1/16W	10	1
R1224	EXB28V100J	COMBI. R-R	10	1	R1551, 52	ERJ2GEJ330	M. RESISTOR CH 1/16W	33	2
R1225-29	ERJ2GEJ100	M. RESISTOR CH 1/16W	10	5	R1553, 54	ERJ2GEJ100	M. RESISTOR CH 1/16W	10	2
R1231	ERJ2GEJ473	M. RESISTOR CH 1/16W	47K	1	R1555	ERJ2GEJ470	M. RESISTOR CH 1/16W	47	1
R1233	EXB28V100J	COMBI. R-R	10	1	R1556-60	DOYAR0000007	M. RESISTOR CH 1/16W	0	5
R1234, 35	EXB28V470J	COMBI. R-R	47	2	R1562	DOYAR0000007	M. RESISTOR CH 1/16W	0	1
R1236	EXB28V100J	COMBI. R-R	10	1	R1565	ERJ2RHD471	M. RESISTOR CH 1/16W	470	1
R1237	ERJ2GEJ100	M. RESISTOR CH 1/16W	10	1	R1600, 01	DOYAR0000007	M. RESISTOR CH 1/16W	0	2
R1238-40	EXB28V100J	COMBI. R-R	10	3	R1603	ERJ2GEJ105	M. RESISTOR CH 1/16W	1M	1
R1241-44	EXB28V560J	COMBI. R-R	56	4	R1604-06	ERJ2GEJ100	M. RESISTOR CH 1/16W	10	3
R1245-50	ERJ2GEJ100	M. RESISTOR CH 1/16W	10	6	R1607	ERJ2GEJ560	M. RESISTOR CH 1/16W	56	1
R1251	ERJ2GEJ220	M. RESISTOR CH 1/16W	22	1	R1608, 09	ERJ2GEJ103	M. RESISTOR CH 1/16W	10K	2
R1252	ERJ2GEJ471	M. RESISTOR CH 1/16W	470	1	R1610	DOYAR0000007	M. RESISTOR CH 1/16W	0	1
R1253-55	ERJ2GEJ100	M. RESISTOR CH 1/16W	10	3	R1614	ERJ2GEJ101	M. RESISTOR CH 1/16W	100	1
R1256	DOYAR0000007	M. RESISTOR CH 1/16W	0	1	R1615	ERJ2GEJ100	M. RESISTOR CH 1/16W	10	1
R1257	EXB28V100J	COMBI. R-R	10	1	R1616	ERJ2RHD471	M. RESISTOR CH 1/16W	470	1
R1258	ERJ2GEJ105	M. RESISTOR CH 1/16W	1M	1	R1617	ERJ2RHD562	M. RESISTOR CH 1/16W	5.6K	1
R1259	EXB28V100J	COMBI. R-R	10	1	R1618	ERJ2RHD271	M. RESISTOR CH 1/16W	270	1
R1260	ERJ2GEJ330	M. RESISTOR CH 1/16W	33	1	R1619	ERJ2GEJ100	M. RESISTOR CH 1/16W	10	1
R1261-73	ERJ2GEJ100	M. RESISTOR CH 1/16W	10	13	R1620	DOYAR0000007	M. RESISTOR CH 1/16W	0	1
R1274-77	EXB28V330J	COMBI. R-R	33	4	R1621	ERJ2GEJ100	M. RESISTOR CH 1/16W	10	1
R1278	ERJ2GEJ101	M. RESISTOR CH 1/16W	100	1	R1622	EXB28V103J	COMBI. R-R	10K	1
R1279	ERJ2GEJ473	M. RESISTOR CH 1/16W	47K	1	R1623, 24	ERJ2GEJ100	M. RESISTOR CH 1/16W	10	2
R1280	ERJ2GEJ560	M. RESISTOR CH 1/16W	56	1	R1626, 27	ERJ2GEJ221	M. RESISTOR CH 1/16W	220	2
R1281-84	EXB28V330J	COMBI. R-R	33	4	R1628, 29	ERJ3GEYJ221	M. RESISTOR CH 1/16W	220	2
R1285-92	ERJ2GEJ103	M. RESISTOR CH 1/16W	10K	8	R1630	ERJ2GEJ221	M. RESISTOR CH 1/16W	220	1
R1293, 94	ERJ2GEJ473	M. RESISTOR CH 1/16W	47K	2	R1631, 32	ERJ2RKD560	M. RESISTOR CH 1/16W	56	2
R1295	ERJ2GEJ103	M. RESISTOR CH 1/16W	10K	1	R1633, 34	ERJ2GEJ100	M. RESISTOR CH 1/16W	10	2
R1296	DOYAR0000007	M. RESISTOR CH 1/16W	0	1	R1635	ERJ2RKD560	M. RESISTOR CH 1/16W	56	1
R1297	ERJ2GEJ473	M. RESISTOR CH 1/16W	47K	1	R1636-39	EXB28V100J	COMBI. R-R	10	4
R1298	ERJ2GEJ330	M. RESISTOR CH 1/16W	33	1	R1640	ERJ2RKD560	M. RESISTOR CH 1/16W	56	1
R1299, 00	DOYAR0000007	M. RESISTOR CH 1/16W	0	2	R1641	ERJ2RHD512	M. RESISTOR CH 1/16W	5.1K	1
R1301	EXB28V103J	COMBI. R-R	10K	1	R1642, 43	ERJ2GEJ221	M. RESISTOR CH 1/16W	220	2
R1302, 03	DOYAR0000007	M. RESISTOR CH 1/16W	0	2	R1644-47	EXB28V100J	COMBI. R-R	10	4
R1304-07	EXB28V100J	COMBI. R-R	10	4	R1648-53	ERJ2GEJ100	M. RESISTOR CH 1/16W	10	6
R1308, 09	ERJ2GEJ100	M. RESISTOR CH 1/16W	10	2	R1700	ERJ2GEJ472	M. RESISTOR CH 1/16W	4.7K	1
R1316-18	ERJ2GEJ103	M. RESISTOR CH 1/16W	10K	3	R1701	ERJ2GEJ560	M. RESISTOR CH 1/16W	56	1
R1319	DOYAR0000007	M. RESISTOR CH 1/16W	0	1	R1702	ERJ2GEJ102	M. RESISTOR CH 1/16W	1K	1
R1320-22	ERJ2GEJ473	M. RESISTOR CH 1/16W	47K	3	R1703	ERJ2GEJ103	M. RESISTOR CH 1/16W	10K	1
R1323	EXB28V100J	COMBI. R-R	10	1	R1704	ERJ2GEJ102	M. RESISTOR CH 1/16W	1K	1
R1324	DOYAR0000007	M. RESISTOR CH 1/16W	0	1	R1705	ERJ2GEJ470	M. RESISTOR CH 1/16W	47	1
R1325	EXB28V100J	COMBI. R-R	10	1	R1706	ERJ2GEJ472	M. RESISTOR CH 1/16W	4.7K	1
R1326-28	DOYAR0000007	M. RESISTOR CH 1/16W	0	3	R1707	DOYAR0000007	M. RESISTOR CH 1/16W	0	1
R1329, 30	ERJ2GEJ330	M. RESISTOR CH 1/16W	33	2	R1708	ERJ2GEJ101	M. RESISTOR CH 1/16W	100	1
R1331, 32	ERJ2GEJ100	M. RESISTOR CH 1/16W	10	2	R1711	ERJ2RHD104	M. RESISTOR CH 1/16W	100K	1
R1400-15	EXB28V220J	COMBI. R-R	22	16	R1714	ERJ2RHD912	M. RESISTOR CH 1/16W	9.1K	1
R1500	DOYAR0000007	M. RESISTOR CH 1/16W	0	1	R1715-21	ERJ2RKD560	M. RESISTOR CH 1/16W	56	7
R1501-03	ERJ2GEJ102	M. RESISTOR CH 1/16W	1K	3	R1722	ERJ2RHD512	M. RESISTOR CH 1/16W	5.1K	1
R1504	ERJ2GEJ222	M. RESISTOR CH 1/16W	2.2K	1	R1723	ERJ2RKD560	M. RESISTOR CH 1/16W	56	1
R1506	ERJ2GEJ330	M. RESISTOR CH 1/16W	33	1	R1724	ERJ2RHD512	M. RESISTOR CH 1/16W	5.1K	1
R1507	ERJ2GEJ102	M. RESISTOR CH 1/16W	1K	1	R1725	EXB28V103J	COMBI. R-R	10K	1
R1508	ERJ2GEJ183	M. RESISTOR CH 1/16W	18K	1	R1802	ERJ2RHD472	M. RESISTOR CH 1/16W	4.7K	1
R1510	ERJ2GEJ183	M. RESISTOR CH 1/16W	18K	1	R1803	ERJ2GEJ473	M. RESISTOR CH 1/16W	47K	1
R1511	ERJ2GEJ472	M. RESISTOR CH 1/16W	4.7K	1	R1804	ERJ2GEJ470	M. RESISTOR CH 1/16W	47	1
R1512	ERJ2GEJ102	M. RESISTOR CH 1/16W	1K	1	R1805-07	ERJ2GEJ101	M. RESISTOR CH 1/16W	100	3
R1514	ERJ2GEJ473	M. RESISTOR CH 1/16W	47K	1	R1808	DOYAR0000007	M. RESISTOR CH 1/16W	0	1
R1515, 16	ERJ2GEJ330	M. RESISTOR CH 1/16W	33	2	R1810	DOYAR0000007	M. RESISTOR CH 1/16W	0	1
R1517, 18	ERJ2GEJ103	M. RESISTOR CH 1/16W	10K	2	R1811	ERJ2GEJ472	M. RESISTOR CH 1/16W	4.7K	1
R1519	DOYAR0000007	M. RESISTOR CH 1/16W	0	1	R1812	ERJ2GEJ182	M. RESISTOR CH 1/16W	1.8K	1
R1520	ERJ2RHD101	M. RESISTOR CH 1/16W	100	1	R1813	ERJ2GEJ821	M. RESISTOR CH 1/16W	820	1
R1523	ERJ2GEJ103	M. RESISTOR CH 1/16W	10K	1	R1817	DOYAR0000007	M. RESISTOR CH 1/16W	0	1
R1524	DOYAR0000007	M. RESISTOR CH 1/16W	0	1	R1820, 21	EXB28V470J	COMBI. R-R	47	2
R1527	DOYAR0000007	M. RESISTOR CH 1/16W	0	1	R1822-24	ERJ2GEJ101	M. RESISTOR CH 1/16W	100	3
R1528	ERJ2GEJ102	M. RESISTOR CH 1/16W	1K	1	R1825	ERJ2GEJ470	M. RESISTOR CH 1/16W	47	1
R1529, 30	ERJ2GEJ101	M. RESISTOR CH 1/16W	100	2	R1900-05	ERJ2GEJ470	M. RESISTOR CH 1/16W	47	6
R1531	DOYAR0000007	M. RESISTOR CH 1/16W	0	1	R1906	ERJ2GEJ330	M. RESISTOR CH 1/16W	33	1

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks	Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
R1907-14	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	8		C322, 23	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	2	
R1915	ERJ3RBD471	M. RESISTOR CH 1/16W 470	1		C324, 25	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	2	
R1916	ERJ3RBD473	M. RESISTOR CH 1/16W 47K	1		C340, 41	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	2	
R1917, 18	ERJ3RBD223	M. RESISTOR CH 1/16W 22K	2		C343	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
R1919	ERJ3RBD153	M. RESISTOR CH 1/16W 15K	1		C345	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
R1920	ERJ3RED474	M. RESISTOR CH 1/16W 470K	1		C347	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
R1921	ERJ3RBD103	M. RESISTOR CH 1/16W 10K	1		C348-51	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	4	
R1922	ERJ2GEJ330	M. RESISTOR CH 1/16W 33	1		C352, 53	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	2	
R1923-25	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	3		C355	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
R1926	ERJ2GEJ222	M. RESISTOR CH 1/16W 2.2K	1		C356	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	1	
R1927, 28	ERJ2GEJ330	M. RESISTOR CH 1/16W 33	2		C360, 61	ECJ2FBOJ106K	C. CAPACITOR CH 50V 10U	2	
R1929	ERJ2GEJ121	M. RESISTOR CH 1/16W 120	1		C362-64	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	3	
R1930	ERJ2GEJ100	M. RESISTOR CH 1/16W 10	1		C366	ECJOEB1C103K	C. CAPACITOR CH 16V 0.01U	1	
R2100-02	ERJ2GEJ101	M. RESISTOR CH 1/16W 100	3		C400	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1	
R2105-12	ERJ2GEJ101	M. RESISTOR CH 1/16W 100	8		C401	FIK1E1050001	C. CAPACITOR CH 25V 1U	1	
R2113	DOYAR0000007	M. RESISTOR CH 1/16W 0	1		C402	F3F1D475A041	T. CAPACITOR CH 20V 4.7U	1	
R2114	ERJ2GEJ101	M. RESISTOR CH 1/16W 100	1		C403	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
					C404	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	1	
X200	HOJ180500014	CRYSTAL OSCILLATOR	1		C409	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
X800	H4G1487B0005	CRYSTAL OSCILLATOR	1		C417-19	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	3	
X1000	HOJ327200115	CRYSTAL OSCILLATOR	1		C420-25	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	6	
X1001	HOJ135500031	CRYSTAL OSCILLATOR	1		C426-31	ECJ3YB1E106K	C. CAPACITOR CH 25V 10U	6	
X1200	HOJ180500014	CRYSTAL OSCILLATOR	1		C432-34	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	3	
X1500	HOJ330500008	CRYSTAL OSCILLATOR	1		C435	ECJ3YB1E106K	C. CAPACITOR CH 25V 10U	1	
X1600	HOJ246500002	CRYSTAL OSCILLATOR	1		C500	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1	
X1700	HOJ246500002	CRYSTAL OSCILLATOR	1		C501	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
X1900	H1C2705B0020	CRYSTAL OSCILLATOR	1		C502	FIK1E1050001	C. CAPACITOR CH 25V 1U	1	
					C503-06	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	4	
ZA100	K4CD01000017	TERMINAL	1		C507	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	1	
					C508-10	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	3	
		MISCELLANEOUS			C511, 12	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	2	
					C513	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1	
	VSC6073	DIGITAL MAIN HEAT SINK	1		C514, 15	ECJ1VB1H472K	C. CAPACITOR CH 50V 4700P	2	
	XQN2+B4FN	SCREW	1		C516-19	F3F1C685A045	T. CAPACITOR CH 16V 6.8U	4	
					C520	F1L1E1060018	C. CAPACITOR CH 25V 10U	1	
					C521-24	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	4	
					C525	F1L1E1060018	C. CAPACITOR CH 25V 10U	1	
					C526	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1	
					C527	FIK1E1050001	C. CAPACITOR CH 25V 1U	1	
■ E2	VEP23678A	CAMERA P. C. BOARD	1	(RTL)	C528	F3F1D475A041	T. CAPACITOR CH 20V 4.7U	1	
					C530	ECJ1VF1E104Z	C. CAPACITOR CH 25V 0.1U	1	
					C531-36	ECJ3YB1E106K	C. CAPACITOR CH 25V 10U	6	
C100-02	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	3		C540, 41	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	2	
C103	F3F1A106A046	T. CAPACITOR CH 10V 10U	1		C600-02	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	3	
C104-11	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	8		C603	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1	
C113	F3F1A106A046	T. CAPACITOR CH 10V 10U	1		C604	ECJOEC1H330J	C. CAPACITOR CH 50V 33P	1	
C114-20	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	7		C605	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1	
C121-23	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	3		C606-08	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	3	
C124-26	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	3		C609	ECJOEB1E103K	C. CAPACITOR CH 25V 0.01U	1	
C203-05	ECJ2FBOJ106K	C. CAPACITOR CH 50V 10U	3		C610	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
C206-08	F3F1V105A032	T. CAPACITOR CH 35V 1U	3		C611	ECJOEB1E103K	C. CAPACITOR CH 25V 0.01U	1	
C209-11	ECJ2FBOJ106K	C. CAPACITOR CH 50V 10U	3		C612	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
C212-19	ECJ1VBOJ105K	C. CAPACITOR CH 35V 1M	8		C616, 17	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	2	
C220, 21	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	2		C618	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
C222	ECJ1VBOJ105K	C. CAPACITOR CH 35V 1M	1		C619	ECJOEB1E103K	C. CAPACITOR CH 25V 0.01U	1	
C223-26	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	4		C621	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
C227-29	F1L1A4760003	C. CAPACITOR CH 16V 47U	3		C622, 23	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	2	
C230-35	ECJ2FBOJ106K	C. CAPACITOR CH 50V 10U	6		C700	ECJOEB1E103K	C. CAPACITOR CH 25V 0.01U	1	
C236, 37	ECJ1VBOJ105K	C. CAPACITOR CH 35V 1M	2		C701	ECJOEB1H272K	C. CAPACITOR CH 50V 2700P	1	
C238, 39	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	2		C702	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1	
C240-43	F3F1A106A046	T. CAPACITOR CH 10V 10U	4		C704	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1	
C244-47	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	4		C705	ECJOEB1E103K	C. CAPACITOR CH 25V 0.01U	1	
C248, 49	F3F1A106A046	T. CAPACITOR CH 10V 10U	2		C707	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	1	
C250-52	F3G1A336A035	T. CAPACITOR CH6. 3V 33U	3		C708	F1G1C822A004	C. CAPACITOR CH 16V 8200P	1	
C253	F3F1A106A046	T. CAPACITOR CH 10V 10U	1		C709	ECJOEC1H390J	C. CAPACITOR CH 50V 39P	1	
C254-59	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	6		C710	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
C260	ECJ1VBOJ105K	C. CAPACITOR CH 35V 1M	1		C712	ECJ2FBOJ106K	C. CAPACITOR CH 50V 10U	1	
C261	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		C713	ECJOEB1E103K	C. CAPACITOR CH 25V 0.01U	1	
C301	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		C714	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	1	
C302	ECJ2FBOJ106K	C. CAPACITOR CH 50V 10U	1		C715, 16	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	2	
C304	ECJ1VBOJ105K	C. CAPACITOR CH 35V 1M	1		C717	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1	
C305	ECJ2FBOJ106K	C. CAPACITOR CH 50V 10U	1		C800	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1	
C306	ECJ1VBOJ105K	C. CAPACITOR CH 35V 1M	1		C801	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
C307	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		C802	ECJOEB1E103K	C. CAPACITOR CH 25V 0.01U	1	
C309	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		C803	ECJOEB1H471K	C. CAPACITOR CH 50V 470P	1	
C310-13	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	4		C804	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1	
C314-17	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	4		C805	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks	Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
C806	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	1		IC104	COJBAA000374	IC	1	
C807	ECJOEB1A473K	C. CAPACITOR CH 10V 0.047U	1		IC105	COJBFA000625	IC	1	
C808	ECJOEC1H151J	C. CAPACITOR CH 50V 150P	1		IC106	COJBAA000374	IC	1	
C809	ECUX1A224KBV	C. CAPACITOR CH 10V 0.22U	1		IC108	COJBAA000374	IC	1	
C810	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1		IC200-02	COZBZ0001532	IC	3	
C811	ECJOEB1E472K	C. CAPACITOR CH 25V 4700P	1		IC203	COCBAC000060	IC	1	
C900, 01	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	2		IC204-06	COCBBC000048	IC	3	
C902	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		IC207	COCBAD000008	IC	1	
C904-06	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	3		IC301	C1ZBZ0003921	IC	1	
C907	ECJOEB1E103K	C. CAPACITOR CH 25V 0.01U	1		IC302	COCBAC000061	IC	1	
C908	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		IC304	COJBAB000619	IC	1	
C909	ECJOEB1E103K	C. CAPACITOR CH 25V 0.01U	1		IC307	COJBAB002248	IC	1	
C910	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1		IC308	COJBAB000606	IC	1	
C911	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		IC309, 10	COJBAB002906	IC	2	
C913-15	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	3		IC401-03	C1AB00002039	IC	3	
C916, 17	ECJOEB1E103K	C. CAPACITOR CH 25V 0.01U	2		IC500	COBCEZ000009	IC	1	
C918-20	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	3		IC501, 02	COCBDC000008	IC	2	
C921, 22	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	2		IC600	COGBF0000016	IC	1	
C923	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		IC601	C1BB00001090	IC	1	
C924	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1		IC603	COCBDC000008	IC	1	
C1000	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		IC604	COCBDC000039	IC	1	
C1001, 02	ECJOEB1E103K	C. CAPACITOR CH 25V 0.01U	2		IC605	COABCA000064	IC	1	
C1003	ECJ2FBOJ106K	C. CAPACITOR CH 50V 10U	1		IC700	COCBBC000048	IC	1	
C1005	ECJOEB1E103K	C. CAPACITOR CH 25V 0.01U	1		IC701	C1AB00002467	IC	1	
C1007, 08	ECJOEB1H471K	C. CAPACITOR CH 50V 470P	2		IC702, 03	COJBAB000621	IC	2	
C1009, 10	ECJOEB1A473K	C. CAPACITOR CH 10V 0.047U	2		IC800	COABCA000064	IC	1	
C1011, 12	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	2		IC801	COABBA000201	IC	1	
C1013	F1G1E392A062	C. CAPACITOR CH 25V 3900P	1		IC900, 01	COGBG0000028	IC	2	
C1014	ECJOEB1E103K	C. CAPACITOR CH 25V 0.01U	1		IC902	COCBDC000039	IC	1	
C1015	F1G1E392A062	C. CAPACITOR CH 25V 3900P	1		IC903	COABCA000064	IC	1	
C1016, 17	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	2		IC904	COCBDC000039	IC	1	
C1018	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1		IC1000	C1AB00002145	IC	1	
C1019	ECUX1C105KBN	C. CAPACITOR CH 10V 1U	1		IC1100	C1AB00002467	IC	1	
C1020	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1		IC1101	COFBAG000068	IC	1	
C1022	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		IC1200	C1AB00002467	IC	1	
C1023, 24	ECJOEB1E472K	C. CAPACITOR CH 25V 4700P	2		IC1300	COEBA0000039	IC	1	
C1100	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1		IC1301	COEBD0000224	IC	1	
C1102	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1		IC1302	COEBE0000348	IC	1	
C1103	ECJOEB1E103K	C. CAPACITOR CH 25V 0.01U	1		IC1303	COEBJ0000243	IC	1	
C1105	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	1		IC1304	COJBAB000619	IC	1	
C1106	F1G1C822A004	C. CAPACITOR CH 16V 8200P	1						
C1107	ECJOEC1H390J	C. CAPACITOR CH 50V 39P	1		L100-05	JOJDC0000102	ELECTRICAL FILTERFILTER	6	
C1108	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		L107	JOJDC0000102	ELECTRICAL FILTERFILTER	1	
C1110	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1		L200-17	JOJCC0000405	FERRITE CORE	18	
C1111	ECJ2FBOJ106K	C. CAPACITOR CH 50V 10U	1		L218-23	JOJCC0000119	ELECTRICAL FILTERFILTER	6	
C1112	ECJOEB1H222K	C. CAPACITOR CH 50V 2200P	1		L300	JOJHC0000032	ELECTRICAL FILTERFILTER	1	
C1113	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		L301-03	JOJDC0000102	ELECTRICAL FILTERFILTER	3	
C1114	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	1		L304	JOJHC0000032	ELECTRICAL FILTERFILTER	1	
C1200, 01	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	2		L305-09	JOJDC0000102	ELECTRICAL FILTERFILTER	5	
C1203	ECJOEB1E103K	C. CAPACITOR CH 25V 0.01U	1		L400, 01	JOJCC0000119	ELECTRICAL FILTERFILTER	2	
C1205	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	1		L402	JOJHC0000032	ELECTRICAL FILTERFILTER	1	
C1206	F1G1C822A004	C. CAPACITOR CH 16V 8200P	1		L500-05	JOJCC0000119	ELECTRICAL FILTERFILTER	6	
C1207	ECJOEC1H390J	C. CAPACITOR CH 50V 39P	1		L600, 01	JOJCC0000119	ELECTRICAL FILTERFILTER	2	
C1208	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		L701	JOJCC0000119	ELECTRICAL FILTERFILTER	1	
C1210	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1		L800	JOJDC0000102	ELECTRICAL FILTERFILTER	1	
C1211	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	1		L900, 01	JOJCC0000119	ELECTRICAL FILTERFILTER	2	
C1300, 01	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	2		L1001, 02	JOJDC0000102	ELECTRICAL FILTERFILTER	2	
C1302	ECJOEB1C223K	C. CAPACITOR CH 16V 0.022U	1		L1100	JOJDC0000102	ELECTRICAL FILTERFILTER	1	
C1303	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		L1200	JOJDC0000102	ELECTRICAL FILTERFILTER	1	
C1304	ECJOEB1C223K	C. CAPACITOR CH 16V 0.022U	1						
C1305	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		Q500	UNR9113JOL	TRANSISTOR	1	
C1307	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		Q501	2SD2216JOL	TRANSISTOR	1	
C1308	ECJOEB1C223K	C. CAPACITOR CH 16V 0.022U	1		Q502	2SB1462JOL	TRANSISTOR	1	
					Q503	2SD2216JOL	TRANSISTOR	1	
CN1	K1KA60BA0028	CONNECTOR (MALE)	1		Q504	UNR9113JOL	TRANSISTOR	1	
CN2	K1MN51B00014	CONNECTOR	1		Q505	2SD2216JOL	TRANSISTOR	1	
CN3	K1KAC0BA0029	CONNECTOR (FEMALE)	1		Q506	XP1401	TRANSISTOR-RESISTOR	1	
CN4	K1KB50BA0015	CONNECTOR (FEMALE)	1		Q507	XP1501	TRANSISTOR-RESISTOR	1	
					Q508	2SB1218AOL	TRANSISTOR	1	
D401	MA6X12100L	DIODE	1		Q509	2SD2216JOL	TRANSISTOR	1	
					Q510	2SB1462JOL	TRANSISTOR	1	
FL200-11	F1H0J1050022	C. CAPACITOR CH6. 3V 1U	12		Q511	2SD1819AOL	TRANSISTOR	1	
FL300, 01	F1H0J1050022	C. CAPACITOR CH6. 3V 1U	2		Q700	UNR9215JOL	TRANSISTOR	1	
					Q800, 01	2SC6054JOL	TRANSISTOR	2	
IC100, 01	COCBBC000048	IC	2						
IC102	COJBAB000717	IC	1		R1-R6	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	6	
IC103	COJBAB000307	IC	1		R100	DOYAR0000007	M. RESISTOR CH 1/16W 0	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks	Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
R102, 03	ERJ2GEJ100X	M. RESISTOR CH 1/16W 10	2		R603	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1	
R104	JOJDC0000102	ELECTRICAL FILTER/FILTER	1		R604	ERJ2RHD683	M. RESISTOR CH 1/16W 68K	1	
R105, 06	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	2		R605	ERJ2RHD153	M. RESISTOR CH 1/16W 15K	1	
R108-10	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	3		R608	ERJ2RHD362	M. RESISTOR CH 1/16W 3.6K	1	
R112-14	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	3		R609	ERAS39J5R6V	M. RESISTOR CH 1/16W 5.6	1	
R115	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	1		R610	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	1	
R116	ERJ2GEJ470	M. RESISTOR CH 1/16W 47	1		R611, 12	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	2	
R208-10	DOYAR0000007	M. RESISTOR CH 1/16W 0	3		R613	ERJ2GEJ101	M. RESISTOR CH 1/16W 100	1	
R214-25	ERJ2GEJ100X	M. RESISTOR CH 1/16W 10	12		R614	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	1	
R244-50	DOYAR0000007	M. RESISTOR CH 1/16W 0	7		R615	ERJ2RHD393	M. RESISTOR CH 1/16W 39K	1	
R256	EXB28V473J	COMBI. R-R 47K	1		R616	ERJ2RHD153	M. RESISTOR CH 1/16W 15K	1	
R257	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1		R617	ERJ2GEJ273	M. RESISTOR CH 1/16W 27K	1	
R259-76	DOYAR0000007	M. RESISTOR CH 1/16W 0	18		R622	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	1	
R300-08	ERJ2GEJ101	M. RESISTOR CH 1/16W 100	9		R626	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	1	
R311	ERJ2GEJ100X	M. RESISTOR CH 1/16W 10	1		R700, 01	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	2	
R312	DOYAR0000007	M. RESISTOR CH 1/16W 0	1		R702	ERJ2GEJ472	M. RESISTOR CH 1/16W 4.7K	1	
R313-21	EXBN8V330J	COMBI. R-R 33	9		R703	ERJ2GEJ102	M. RESISTOR CH 1/16W 1K	1	
R322	DOYAR0000007	M. RESISTOR CH 1/16W 0	1		R704	ERJ2GEJ681	M. RESISTOR CH 1/16W 680	1	
R324, 25	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	2		R705	DOGB1R5JA057	M. RESISTOR CH 1/16W 1.5	1	
R326	ERJ2GEJ330	M. RESISTOR CH 1/16W 33	1		R706	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	1	
R327-29	EXBN8V330J	COMBI. R-R 33	3		R707	ERJ2GEJ272	M. RESISTOR CH 1/16W 2.7K	1	
R330-32	DOYAR0000007	M. RESISTOR CH 1/16W 0	3		R708, 09	ERJ2GEJ124	M. RESISTOR CH 1/16W 120K	2	
R333	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	1		R710, 11	ERJ2GEJ272	M. RESISTOR CH 1/16W 2.7K	2	
R334	DOYAR0000007	M. RESISTOR CH 1/16W 0	1		R712, 13	ERJ2GEJ224	M. RESISTOR CH 1/16W 220K	2	
R335, 36	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	2		R714, 15	ERJ2GEJ472	M. RESISTOR CH 1/16W 4.7K	2	
R337	DOYAR0000007	M. RESISTOR CH 1/16W 0	1		R716	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	1	
R338-41	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	4		R717, 18	ERJ2GEJ472	M. RESISTOR CH 1/16W 4.7K	2	
R346, 47	ERJ2GEJ330	M. RESISTOR CH 1/16W 33	2		R719	ERJ2GEJ391	M. RESISTOR CH 1/16W 390	1	
R348, 49	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	2		R720, 21	ERJ2GEJ102	M. RESISTOR CH 1/16W 1K	2	
R351, 52	DOYAR0000007	M. RESISTOR CH 1/16W 0	2		R722, 23	ERJ2GEJ104	M. RESISTOR CH 1/16W 100K	2	
R355	DOYAR0000007	M. RESISTOR CH 1/16W 0	1		R728, 29	DOYAR0000007	M. RESISTOR CH 1/16W 0	2	
R358	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	1		R734-36	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	3	
R359	EXB28V473J	COMBI. R-R 47K	1		R737	ERJ2GEJ150	M. RESISTOR CH 1/16W 15	1	
R361	EXB28V473J	COMBI. R-R 47K	1		R800	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	1	
R362	DOYAR0000007	M. RESISTOR CH 1/16W 0	1		R803	ERJ2GEJ472	M. RESISTOR CH 1/16W 4.7K	1	
R363	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1		R804	ERJ2GEJ104	M. RESISTOR CH 1/16W 100K	1	
R365	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	1		R805	ERJ3GEY682	M. RESISTOR CH 1/16W 6.8K	1	
R366	ERJ2GEJ102	M. RESISTOR CH 1/16W 1K	1		R806	ERJ2GEJ121	M. RESISTOR CH 1/16W 120	1	
R367, 68	DOYAR0000007	M. RESISTOR CH 1/16W 0	2		R807	ERJ2GEJ224	M. RESISTOR CH 1/16W 220K	1	
R370	DOYAR0000007	M. RESISTOR CH 1/16W 0	1		R808, 09	ERJ2GEJ472	M. RESISTOR CH 1/16W 4.7K	2	
R375	ERJ2GEJ102	M. RESISTOR CH 1/16W 1K	1		R810	ERJ3GEYJ224	M. RESISTOR CH 1/16W 220K	1	
R376, 77	ERJ2GEJ101	M. RESISTOR CH 1/16W 100	2		R811	ERJ2GEJ474	M. RESISTOR CH 1/16W 470K	1	
R400-02	ERJ2GEJ332	M. RESISTOR CH 1/16W 3.3K	3		R812	ERJ2GEJ223	M. RESISTOR CH 1/16W 22K	1	
R403-05	ERJ2RHD104	M. RESISTOR CH 1/16W 100K	3		R813, 14	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	2	
R407	DOYAR0000007	M. RESISTOR CH 1/16W 0	1		R815	DOYAR0000007	M. RESISTOR CH 1/16W 0	1	
R409	DOYAR0000007	M. RESISTOR CH 1/16W 0	1		R816	ERJ2GEJ221	M. RESISTOR CH 1/16W 220	1	
R411	DOYAR0000007	M. RESISTOR CH 1/16W 0	1		R817	ERJ2GEJ154	M. RESISTOR CH 1/16W 150K	1	
R421-23	ERJ2GEJ105	M. RESISTOR CH 1/16W 1M	3		R818	ERJ3GEYJ223	M. RESISTOR CH 1/16W 22K	1	
R500	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1		R819	ERJ3GEY6472	M. RESISTOR CH 1/16W 4.7K	1	
R501	ERJ2GEJ224	M. RESISTOR CH 1/16W 220K	1		R820	ERJ2GEJ332	M. RESISTOR CH 1/16W 3.3K	1	
R502	ERJ2GEJ223	M. RESISTOR CH 1/16W 22K	1		R821	ERJ2GEJ563	M. RESISTOR CH 1/16W 56K	1	
R503	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	1		R822	ERJ2GEJ224	M. RESISTOR CH 1/16W 220K	1	
R504	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1		R823	ERJ2GEJ124	M. RESISTOR CH 1/16W 120K	1	
R505	ERJ2GEJ102	M. RESISTOR CH 1/16W 1K	1		R824	ERJ2GEJ221	M. RESISTOR CH 1/16W 220	1	
R506	ERJ2GEJ222	M. RESISTOR CH 1/16W 2.2K	1		R826	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	1	
R507	ERJ2GEJ224	M. RESISTOR CH 1/16W 220K	1		R830, 31	DOYAR0000007	M. RESISTOR CH 1/16W 0	2	
R508	ERJ2GEJ102	M. RESISTOR CH 1/16W 1K	1		R902	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	1	
R509	ERJ2GEJ332	M. RESISTOR CH 1/16W 3.3K	1		R903	ERJ2RHD333	M. RESISTOR CH 1/16W 33K	1	
R510	ERJ2GEJ223	M. RESISTOR CH 1/16W 22K	1		R904	ERJ2GEJ101	M. RESISTOR CH 1/16W 100	1	
R511	ERJ2GEJ562	M. RESISTOR CH 1/16W 5.6K	1		R905	ERJ2RHD104	M. RESISTOR CH 1/16W 100K	1	
R512	ERJ2GEJ222	M. RESISTOR CH 1/16W 2.2K	1		R906	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	1	
R513	ERJ2GEJ104	M. RESISTOR CH 1/16W 100K	1		R907	ERJ3GEYJ3R3	M. RESISTOR CH 1/16W 3.3	1	
R515	ERJ2GEJ563	M. RESISTOR CH 1/16W 56K	1		R908	ERJ2RHD104	M. RESISTOR CH 1/16W 100K	1	
R517, 18	ERJ2GEJ222	M. RESISTOR CH 1/16W 2.2K	2		R909	ERJ2RHD203	M. RESISTOR CH 1/16W 20K	1	
R519, 20	ERJ2GEJ221	M. RESISTOR CH 1/16W 220	2		R910	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	1	
R521	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1		R911	ERJ2RHD333	M. RESISTOR CH 1/16W 33K	1	
R524	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1		R912	ERJ2GEJ101	M. RESISTOR CH 1/16W 100	1	
R527	ERJ2RDK224	M. RESISTOR CH 1/16W 220K	1		R913	ERJ2RHD104	M. RESISTOR CH 1/16W 100K	1	
R528	DOYAR0000007	M. RESISTOR CH 1/16W 0	1		R914	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	1	
R529	ERJ2RDK124	M. RESISTOR CH 1/16W 120K	1		R915	ERJ3GEYJ3R3	M. RESISTOR CH 1/16W 3.3	1	
R530	ERJ2RHD563	M. RESISTOR CH 1/16W 56K	1		R916	ERJ2RHD104	M. RESISTOR CH 1/16W 100K	1	
R531	ERJ2RHD182	M. RESISTOR CH 1/16W 1.8K	1		R917	ERJ2RHD203	M. RESISTOR CH 1/16W 20K	1	
R532	ERJ2RHD563	M. RESISTOR CH 1/16W 56K	1		R918, 19	ERJ2GEJ273	M. RESISTOR CH 1/16W 27K	2	
R536, 37	DOYAR0000007	M. RESISTOR CH 1/16W 0	2		R1000	ERJ2GEJ101	M. RESISTOR CH 1/16W 100	1	
R600	ERAS39J5R6	M. RESISTOR 5.6	1		R1001	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	1	
R601	ERJ2RHD223	M. RESISTOR CH 1/16W 22K	1		R1002	DOYAR0000007	M. RESISTOR CH 1/16W 0	1	
R602	ERJ2RHD821	M. RESISTOR CH 1/16W 820	1		R1005	DOYAR0000007	M. RESISTOR CH 1/16W 0	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks	Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
R1006	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	1		C259	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
R1007	ERJ2GEJ101	M. RESISTOR CH 1/16W 100	1		C401-04	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	4	
R1008	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	1		C405	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
R1009	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1		C406	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	1	
R1010-12	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	3		C407	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
R1013, 14	D0GB154JA057	M. RESISTOR CH 1/16W 150K	2		C408	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	1	
R1015-17	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	3		C409-12	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	4	
R1018, 19	ERJ2GEJ182	M. RESISTOR CH 1/16W 1.8K	2		C414-17	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	4	
R1020, 21	ERJ2GEJ393	M. RESISTOR CH 1/16W 39K	2		C418-21	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	4	
R1022	ERJ3GEYJ433	M. RESISTOR CH 1/16W 43K	1		C504-07	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	4	
R1025	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1						
R1026	ERJ3GEYJ333	M. RESISTOR CH 1/16W 33K	1		CN100	K1MR70B00004	CONNECTOR	1	
R1027	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1		CN101	K1KA70BA0028	CONNECTOR (FEMALE)	1	
R1028, 29	ERJ3GEYJ3R3	M. RESISTOR CH 1/16W 3.3	2		CN104	K1MN16BA00059	CONNECTOR	1	
R1033, 34	DOYAR0000007	M. RESISTOR CH 1/16W 0	2						
R1100	ERJ2GEJ102	M. RESISTOR CH 1/16W 1K	1		D200	MA3J14700L	DIODE	1	
R1101	ERJ2GEJ681	M. RESISTOR CH 1/16W 680	1						
R1102	ERJ2GEJ100X	M. RESISTOR CH 1/16W 10	1		FL100, 01	F1H0J1050022	C. CAPACITOR CH6. 3V 1U	2	
R1103	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	1						
R1104	ERJ2GEJ272	M. RESISTOR CH 1/16W 2.7K	1		IC100	C0EBB0000122	IC	1	
R1105, 06	ERJ2GEJ124	M. RESISTOR CH 1/16W 120K	2		IC101	C0EBE0000348	IC	1	
R1107, 08	ERJ2GEJ272	M. RESISTOR CH 1/16W 2.7K	2		IC200	C2GBC0000332	IC	1	
R1109, 10	ERJ2GEJ224	M. RESISTOR CH 1/16W 220K	2		IC201	COJBFAF000545	IC	1	
R1111, 12	ERJ2GEJ472	M. RESISTOR CH 1/16W 4.7K	2		IC203	COJBAA000362	IC	1	
R1113	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	1		IC204, 05	COJBZ0001537	IC	2	
R1114, 15	ERJ2GEJ472	M. RESISTOR CH 1/16W 4.7K	2		IC206, 07	C1ZBZ0002771	IC	2	
R1116	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	1		IC208	COJBAA000362	IC	1	
R1117	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	1		IC402, 03	C3ABRY000032	IC	2	
R1200	ERJ2GEJ102	M. RESISTOR CH 1/16W 1K	1		IC500	COJBZ0000855	IC	1	
R1201	ERJ2GEJ681	M. RESISTOR CH 1/16W 680	1		IC501, 02	COJBFAE000321	IC	2	
R1202	ERJ2GEJ100X	M. RESISTOR CH 1/16W 10	1		IC506	COJBFAF000545	IC	1	
R1203	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	1						
R1204	ERJ2GEJ272	M. RESISTOR CH 1/16W 2.7K	1		IP404	VEF0079	IC	1	
R1205, 06	ERJ2GEJ124	M. RESISTOR CH 1/16W 120K	2		IP407	VEF0080	IC	1	
R1207, 08	ERJ2GEJ272	M. RESISTOR CH 1/16W 2.7K	2						
R1209, 10	ERJ2GEJ224	M. RESISTOR CH 1/16W 220K	2		L100, 01	JOJHC0000032	ELECTRICAL FILTERFILTER	2	
R1211, 12	ERJ2GEJ472	M. RESISTOR CH 1/16W 4.7K	2		L201-03	JOJDC0000102	ELECTRICAL FILTERFILTER	3	
R1213	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	1		L204-07	JOJHC0000032	ELECTRICAL FILTERFILTER	4	
R1214, 15	ERJ2GEJ472	M. RESISTOR CH 1/16W 4.7K	2		L400-03	JOJHC0000032	ELECTRICAL FILTERFILTER	4	
R1216-18	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	3						
R1300	ERJ2GEJ472	M. RESISTOR CH 1/16W 4.7K	1		R108-11	DOYAR0000007	M. RESISTOR CH 1/16W 0	4	
R1301-08	DOYAR0000007	M. RESISTOR CH 1/16W 0	8		R200	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	1	
					R201, 02	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	2	
X100	H1A7415B0004	CRYSTAL OSCILLATOR	1		R203, 04	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	2	
X101	H1A7425B0001	CRYSTAL OSCILLATOR	1		R205, 06	ERJ2GEJ822	M. RESISTOR CH 1/16W 8.2K	2	
					R207, 08	ERJ2GEJ100X	M. RESISTOR CH 1/16W 10	2	
					R209, 10	ERJ2GEJ102	M. RESISTOR CH 1/16W 1K	2	
					R211, 12	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	2	
					R213-16	DOYAR0000007	M. RESISTOR CH 1/16W 0	4	
■ E3	VEP03H48A	SH P. C. BOARD	1	(RTL)	R217, 18	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	2	
					R219, 20	ERJ2GEJ102	M. RESISTOR CH 1/16W 1K	2	
					R221	DOYAR0000007	M. RESISTOR CH 1/16W 0	1	
					R222-24	ERJ2GEJ272	M. RESISTOR CH 1/16W 2.7K	3	
C100	ECJ2FBOJ106K	C. CAPACITOR CH 50V 10U	1		R225	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1	
C101	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		R226	ERJ2GEJ272	M. RESISTOR CH 1/16W 2.7K	1	
C102, 03	ECJ2FBOJ106K	C. CAPACITOR CH 50V 10U	2		R227	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	1	
C104	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		R228, 29	ERJ2GEJ272	M. RESISTOR CH 1/16W 2.7K	2	
C105	ECJ2FBOJ106K	C. CAPACITOR CH 50V 10U	1		R230	EXB28V473J	COMBI. R-R 47K	1	
C106	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		R231	ERJ2GEJ272	M. RESISTOR CH 1/16W 2.7K	1	
C107	ECJOEB1C223K	C. CAPACITOR CH 16V 0.022U	1		R232	ERJ2GEJ100X	M. RESISTOR CH 1/16W 10	1	
C108	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		R233	ERJ2GEJ272	M. RESISTOR CH 1/16W 2.7K	1	
C109	ECJOEB1C223K	C. CAPACITOR CH 16V 0.022U	1		R234	ERJ2GEJ330	M. RESISTOR CH 1/16W 33	1	
C200	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		R235, 36	DOYAR0000007	M. RESISTOR CH 1/16W 0	2	
C203	ECJOEB1C103K	C. CAPACITOR CH 16V 0.01U	1		R237	ERJ2GEJ330	M. RESISTOR CH 1/16W 33	1	
C204	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		R238	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	1	
C206	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		R239-41	ERJ2GEJ102	M. RESISTOR CH 1/16W 1K	3	
C208	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		R243, 44	ERJ2GEJ100X	M. RESISTOR CH 1/16W 10	2	
C209	ECJOEC1H070D	C. CAPACITOR CH 50V 7P	1		R245	ERJ2GEJ680	M. RESISTOR CH 1/16W 68	1	
C210	ECJOEC1H060D	C. CAPACITOR CH 50V 6P	1		R246-48	ERJ2GEJ560	M. RESISTOR CH 1/16W 56	3	
C211-14	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	4		R249	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	1	
C215	ECJ2FBOJ106K	C. CAPACITOR CH 50V 10U	1		R250	ERJ2GEJ680	M. RESISTOR CH 1/16W 68	1	
C216	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		R251, 52	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	2	
C217	ECJ3YB1E106K	C. CAPACITOR CH 25V 10U	1		R253-55	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	3	
C218-34	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	17		R257-67	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	11	
C235, 36	ECJ2FBOJ106K	C. CAPACITOR CH 50V 10U	2		R268, 69	ERJ2GEJ822	M. RESISTOR CH 1/16W 8.2K	2	
C237, 38	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	2		R270, 71	ERJ2GEJ100X	M. RESISTOR CH 1/16W 10	2	
C239-58	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	20		R272	ERJ2GEJ822	M. RESISTOR CH 1/16W 8.2K	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks	Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
R273	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	1		C1449	ECJOEC1H220J	C. CAPACITOR CH 50V 22P	1	
R274-76	ERJ2GEJ822	M. RESISTOR CH 1/16W 8.2K	3		C1451	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1	
R277	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	1		C1452	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
R278-86	EXB28V330J	COMBI. R-R	33	9	C1453	ECJ2FBOJ106K	C. CAPACITOR CH 50V 10U	1	
R287	ERJ2GEJ330	M. RESISTOR CH 1/16W 33	1		C1455-57	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	3	
R288	ERJ2GEJ100X	M. RESISTOR CH 1/16W 10	1		C1464	ECJ3YB1C225K	C. CAPACITOR CH 16V 2.2M	1	
R289	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1		C1466, 67	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	2	
R290	DOYAR0000007	M. RESISTOR CH 1/16W 0	1		C1468	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1	
R291	ERJ2GEJ100X	M. RESISTOR CH 1/16W 10	1		C1469	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
R292	ERJ2GEJ330	M. RESISTOR CH 1/16W 33	1		C1471	ECJ1VB1C104K	C. CAPACITOR CH 16V 0.1U	1	
R293, 94	ERJ2GEJ680	M. RESISTOR CH 1/16W 68	2		C1472	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1	
R298, 99	ERJ2GEJ100X	M. RESISTOR CH 1/16W 10	2		C1473	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
R300, 01	ERJ2GEJ470	M. RESISTOR CH 1/16W 47	2		C1474	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1	
R302-07	EXB28V470J	COMBI. R-R	47	6	C1475, 76	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	2	
R308	ERJ2GEJ102	M. RESISTOR CH 1/16W 1K	1		C1477	F1K1A225A007	C. CAPACITOR CH 10V 2.2U	1	
R309	ERJ2GEJ470	M. RESISTOR CH 1/16W 47	1		C1478	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
R310-13	ERJ2GEJ560	M. RESISTOR CH 1/16W 56	4		C1479	F1K1A225A007	C. CAPACITOR CH 10V 2.2U	1	
R314	ERJ2GEJ330	M. RESISTOR CH 1/16W 33	1		C1480	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1	
R315	ERJ2GEJ680	M. RESISTOR CH 1/16W 68	1		C1481	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
R316	ERJ2GEJ330	M. RESISTOR CH 1/16W 33	1		C1482	F3G1C156A028	T. CAPACITOR CH 16V 15U	1	
R317	ERJ2GEJ820	M. RESISTOR CH 1/16W 82	1		C1483	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
R318	ERJ2GEJ560	M. RESISTOR CH 1/16W 56	1		C1484	F1K1A225A007	C. CAPACITOR CH 10V 2.2U	1	
R319-22	ERJ2RHD101	M. RESISTOR CH 1/16W 100	4		C1485	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1	
R325	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1		C1487	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
R327-29	ERJ2GEJ100X	M. RESISTOR CH 1/16W 10	3		C1490	ECJ2FBOJ106K	C. CAPACITOR CH 50V 10U	1	
R330-33	DOYAR0000007	M. RESISTOR CH 1/16W 0	4						
R334-37	ERJ2GEJ100X	M. RESISTOR CH 1/16W 10	4		CN1400	K1MN50B00043	CONNECTOR	1	
R339-41	ERJ2GEJ100X	M. RESISTOR CH 1/16W 10	3		CN1401	K1KY08AA0710	CONNECTOR	1	
R342, 43	ERJ2GEJ330	M. RESISTOR CH 1/16W 33	2		CN1402	K1MN16BA0059	CONNECTOR	1	
R400, 01	EXB28V330J	COMBI. R-R	33	2	CN1403	K1MN06BA0252	CONNECT	1	
R402	EXB28V470J	COMBI. R-R	47	1	CN1404	K1MN30BA0059	CONNECTOR	1	
R404-08	EXB28V470J	COMBI. R-R	47	5					
R410-13	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	4		D1400	MA111	DIODE	1	
R414, 15	EXB28V330J	COMBI. R-R	33	2	D1401-04	MA3S781D0L	DIODE	4	
R416-21	EXB28V470J	COMBI. R-R	47	6	D1408-15	MA3S781D0L	DIODE	8	
R500, 01	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	2		D1416	B3AAB0000197	LED	1	
R502, 03	ERJ2GEJ330	M. RESISTOR CH 1/16W 33	2		D1417	MA3S781D0L	DIODE	1	
R504, 05	DOYAR0000007	M. RESISTOR CH 1/16W 0	2						
R506, 07	ERJ2GEJ100X	M. RESISTOR CH 1/16W 10	2		IC1400	AN77L09M	IC	1	
R508	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	1		IC1401	COABBB000271	IC	1	
R509	DOYAR0000007	M. RESISTOR CH 1/16W 0	1		IC1405	COBCBC000053	IC	1	
R510	ERJ2GEJ560	M. RESISTOR CH 1/16W 56	1		IC1409	COCBAGE00012	IC	1	
R511	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1		IC1410	C1AB00002388	IC	1	
R512	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	1		IC1411, 12	COJBAS000249	IC	2	
R513, 14	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	2						
R515, 16	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	2		L1401, 02	JOJDC0000102	ELECTRICAL FILTERFILTER	2	
R517, 18	EXB28V330J	COMBI. R-R	33	2	L1405, 06	JOJDC0000102	ELECTRICAL FILTERFILTER	2	
R519, 20	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	2						
R521	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1		Q1400	XP0431N00L	TRANSISTOR	1	
R522, 23	ERJ2GEJ100X	M. RESISTOR CH 1/16W 10	2		Q1401	2SB095600L	TRANSISTOR	1	
R524	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1		Q1402	2SD2216J0L	TRANSISTOR	1	
					Q1403	XP0431N00L	TRANSISTOR	1	
X200	HOJ327200115	CRYSTAL OSCILLATOR	1						
		MISCELLANEOUS			R1400, 01	ERJ6GEYG102	M. RESISTOR CH 1/10W 1K	2	
					R1404, 05	ERJ3RBD104	M. RESISTOR CH 1/16W 100K	2	
					R1406-09	ERJ3RBD223	M. RESISTOR CH 1/16W 22K	4	
	VSC6072	SH HEAT SINK	1		R1410	ERJ3RBD822	M. RESISTOR CH 1/16W 8.2K	1	
					R1411	ERJ3RBD562	M. RESISTOR CH 1/16W 5.6K	1	
					R1412	ERJ3RBD822	M. RESISTOR CH 1/16W 8.2K	1	
					R1413	ERJ3RBD562	M. RESISTOR CH 1/16W 5.6K	1	
					R1414-31	ERJ2GEJ560	M. RESISTOR CH 1/16W 56	18	
					R1432, 33	ERJ2GEJ101	M. RESISTOR CH 1/16W 100	2	
■ E4	VEP001W7A	R SIDE P. C. BOARD	1 (RTL)		R1435	ERJ2GEJ101	M. RESISTOR CH 1/16W 100	1	
					R1438-40	ERJ2GEJ101	M. RESISTOR CH 1/16W 100	3	
B1400	N4EZH27Z0001	BATTERY	1		R1442-44	ERJ2GEJ101	M. RESISTOR CH 1/16W 100	3	
					R1445, 46	EXBN8V470J	COMBI. R-R	47	2
C1400	F3H1V106A049	T. CAPACITOR CH 35V 10U	1		R1447-49	ERJ2GEJ101	M. RESISTOR CH 1/16W 100	3	
C1401, 02	ECJ1VB1C104K	C. CAPACITOR CH 16V 0.1U	2		R1451-53	ERJ2GEJ101	M. RESISTOR CH 1/16W 100	3	
C1403	ECJ3YB1E106K	C. CAPACITOR CH 25V 10U	1		R1457	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1	
C1404	ECJ1VB1C104K	C. CAPACITOR CH 16V 0.1U	1		R1458	ERJ2GEJ102	M. RESISTOR CH 1/16W 1K	1	
C1405, 06	F3H1C226A063	T. CAPACITOR CH 25V 22U	2		R1467	ERJ3GEYJ470	M. RESISTOR CH 1/16W 47	1	
C1407, 08	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	2		R1468	ERJ2GEJ181	M. RESISTOR CH 1/16W 180	1	
C1434-36	ECJOEC1H220J	C. CAPACITOR CH 50V 22P	3		R1470	ERJ2GEJ332	M. RESISTOR CH 1/16W 3.3K	1	
C1437, 38	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	2		R1471	ERJ2GEJ821	M. RESISTOR CH 1/16W 820	1	
C1441, 42	ECJOEC1H220J	C. CAPACITOR CH 50V 22P	2		R1472	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	1	
C1445, 46	ECJOEC1H220J	C. CAPACITOR CH 50V 22P	2		R1473	ERJ2GEJ332	M. RESISTOR CH 1/16W 3.3K	1	
					R1474	ERJ2GEJ272	M. RESISTOR CH 1/16W 2.7K	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks	Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
R1475	DOYAR0000007	M. RESISTOR CH 1/16W 0	1		C1209	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
R1481	DOYAR0000007	M. RESISTOR CH 1/16W 0	1		C1210, 11	F1H1C105A095	C. CAPACITOR CH 16V 1U	2	
R1482	ERJ3RBD103	M. RESISTOR CH 1/16W 10K	1		C1212	ECJOEB1E472K	C. CAPACITOR CH 25V 4700P	1	
R1483	ERJ3RBD102	M. RESISTOR CH 1/16W 1K	1		C1213, 14	ECJ3YB1C106K	C. CAPACITOR CH 16V 10U	2	
R1484	ERJ3RBD103	M. RESISTOR CH 1/16W 10K	1		C1215	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	1	
R1485	ERJ3RBD102	M. RESISTOR CH 1/16W 1K	1		C1216	F1H1C105A095	C. CAPACITOR CH 16V 1U	1	
R1486	ERJ26EJ330	M. RESISTOR CH 1/16W 33	1		C1217	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	1	
RM1400	B3RBB0000011	DIODE	1		C1218	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
SW1400, 01	EVQPLPA08	SWITCH	2		C1219	ECJOEB1H222K	C. CAPACITOR CH 50V 2200P	1	
SW1402, 03	KOH1BA000442	SWITCH	2		C1220	ECJOEB1A683K	C. CAPACITOR CH 10V 0.068U	1	
SW1404	KOKABA000013	SWITCH	1		C1221, 22	F1H1C105A095	C. CAPACITOR CH 16V 1U	2	
SW1405	KOD122A00126	SWITCH	1		C1223	ECJOEB1E472K	C. CAPACITOR CH 25V 4700P	1	
SW1409	KOD122A00126	SWITCH	1		C1224	ECJ2FB0J106K	C. CAPACITOR CH 50V 10U	1	
SW1410, 11	KOH1BA000442	SWITCH	2		C1225, 26	EEFCX06151	E. CAPACITOR 4V 150U	2	
SW1412	KOD122A00126	SWITCH	1		C1227	F1H1C105A095	C. CAPACITOR CH 16V 1U	1	
SW1413	KOD123A00076	SWITCH	1		C1301	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
SW1414-16	KOH1BA000442	SWITCH	3		C1303	ECJOEB1E562K	C. CAPACITOR CH 25V 5600P	1	
SW1417	KOD122A00126	SWITCH	1		C1305	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
SW1418-21	KOH1BA000442	SWITCH	4		C1306	ECJ1VB1C683K	C. CAPACITOR CH 16V 0.063U	1	
SW1422	KOD122A00126	SWITCH	1		C1307	ECJOEC1H151J	C. CAPACITOR CH 50V 150P	1	
VR1400, 01	D2BBA14A0002	V. RESISTOR 10K	2		C1308	ECJOEB1H222K	C. CAPACITOR CH 50V 2200P	1	
VR1402, 03	EVMS3YSX50B14	V. RESISTOR 10K	2		C1309	ECJOEC1H181J	C. CAPACITOR CH 50V 180P	1	
		MISCELLANEOUS			C1310	ECJOEC1H560J	C. CAPACITOR CH 50V 56P	1	
	VG08615	AUDIO VR COVER	1		C1311	ECJOEB1C223K	C. CAPACITOR CH 16V 0.022U	1	
	VGUD057	AUDIO ROTARY KNOB	2		C1312	F1G1C1040010	C. CAPACITOR CH 16V 0.1U	1	
	VGH5072	KNOB HINGE SEAL	1		C1315	ECJOEB1E682K	C. CAPACITOR CH 25V 6800P	1	
					C1316	ECJOEB1E472K	C. CAPACITOR CH 25V 4700P	1	
					C1317	ECJOEB1E682K	C. CAPACITOR CH 25V 6800P	1	
■ E5	VEP001W1A	CAM OP P. C. BOARD	1	(RTL)	C1318	ECJOEB1E103K	C. CAPACITOR CH 25V 0.01U	1	
					C1319	ECJOEB1H222K	C. CAPACITOR CH 50V 2200P	1	
CN100	K1MN16BA0059	CONNECTOR	1		C1320	ECJOEB1E472K	C. CAPACITOR CH 25V 4700P	1	
CN101	K1MN06BA0252	CONNECT	1		C1322	ECJOEB1E103K	C. CAPACITOR CH 25V 0.01U	1	
					C1323	ECJOEB1H331K	C. CAPACITOR CH 50V 330P	1	
D100-05	MA3S781D0L	DIODE	6		C1324	ECJ3YB1C106K	C. CAPACITOR CH 16V 10U	1	
D107	MA3S781D0L	DIODE	1		C1326	ECJ3YB1C106K	C. CAPACITOR CH 16V 10U	1	
SW100	KOD113B00029	SWITCH	1		C1327	F1G1C473A004	C. CAPACITOR CH 16V 0.047U	1	
SW101-03	KOMZ11000005	SWITCH	3		C1328	ECJOEC1H151J	C. CAPACITOR CH 50V 150P	1	
SW104-08	EVQPLPA08	SWITCH	5		C1329	F1H1C105A095	C. CAPACITOR CH 16V 1U	1	
					C1332	ECJ2VB1C224K	C. CAPACITOR CH 16V 0.22U	1	
					C1333, 34	ECJ3YB1C106K	C. CAPACITOR CH 16V 10U	2	
					C1335	ECJ2FB1C475K	C. CAPACITOR CH 16V 4.7U	1	
					C1336	ECJOEB1H331K	C. CAPACITOR CH 50V 330P	1	
					C1337	ECJ2FB1C475K	C. CAPACITOR CH 16V 4.7U	1	
					C1338-40	ECJOEB1H331K	C. CAPACITOR CH 50V 330P	3	
					C1341-43	ECJ2FB0J106K	C. CAPACITOR CH 50V 10U	3	
					C1344	ECJ2FB1A475K	C. CAPACITOR CH 10V 4.7U	1	
					C1346	ECJ3YB1E106K	C. CAPACITOR CH 25V 10U	1	
					C1347, 48	ECJ2FB0J106K	C. CAPACITOR CH 50V 10U	2	
					C1349, 50	F1H1C105A095	C. CAPACITOR CH 16V 1U	2	
					C1351, 52	F3G1C106A028	T. CAPACITOR CH 16V 10U	2	
■ E6	VEP01A06A	POWER P. C. BOARD	1	(RTL)	C1353, 54	F1H1C105A095	C. CAPACITOR CH 16V 1U	2	
					C1355, 56	F3G1C106A028	T. CAPACITOR CH 16V 10U	2	
					C1357	ECJ3YB1E106K	C. CAPACITOR CH 25V 10U	1	
C1002	F1H1C105A095	C. CAPACITOR CH 16V 1U	1		C1502	ECJOEB1E562K	C. CAPACITOR CH 25V 5600P	1	
C1003	ECJ1VB1H104K	C. CAPACITOR CH 50V 0.1U	1		C1504	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
C1007, 08	ECJOEB1E103K	C. CAPACITOR CH 25V 0.01U	2		C1505	F1G1C1040010	C. CAPACITOR CH 16V 0.1U	1	
C1013	F1H1C105A095	C. CAPACITOR CH 16V 1U	1		C1506	ECJ1VB1C683K	C. CAPACITOR CH 16V 0.063U	1	
C1014	ECJ2VB1H102K	C. CAPACITOR CH 50V 1000P	1		C1507	ECJOEC1H151J	C. CAPACITOR CH 50V 150P	1	
C1017, 18	ECJ1VB1H104K	C. CAPACITOR CH 50V 0.1U	2		C1508	ECJOEB1E562K	C. CAPACITOR CH 25V 5600P	1	
C1019	ECJ2FB1C475K	C. CAPACITOR CH 16V 4.7U	1		C1509	ECJOEB1H222K	C. CAPACITOR CH 50V 2200P	1	
C1020	F1H1C105A095	C. CAPACITOR CH 16V 1U	1		C1510	ECJOEC1H181J	C. CAPACITOR CH 50V 180P	1	
C1021	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	1		C1511	ECJOEB1H561K	C. CAPACITOR CH 50V 560P	1	
C1022	ECJ2FB1E105K	C. CAPACITOR CH 25V 1U	1		C1512	ECJOEB1C223K	C. CAPACITOR CH 16V 0.022U	1	
C1023, 24	F1H1C224A074	C. CAPACITOR CH 16V 0.22U	2		C1513	ECJOEB1E562K	C. CAPACITOR CH 25V 5600P	1	
C1025	ECJOEB1H331K	C. CAPACITOR CH 50V 330P	1		C1516, 17	ECJOEB1H152K	C. CAPACITOR CH 50V 1500P	2	
C1026	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	1		C1518	ECJOEB1E472K	C. CAPACITOR CH 25V 4700P	1	
C1027-40	F1H1C105A095	C. CAPACITOR CH 16V 1U	14		C1519	ECJOEB1E682K	C. CAPACITOR CH 25V 6800P	1	
C1042	ECJ1VB1H104K	C. CAPACITOR CH 50V 0.1U	1		C1520	ECJOEB1E103K	C. CAPACITOR CH 25V 0.01U	1	
C1044	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		C1521	ECJOEB1H222K	C. CAPACITOR CH 50V 2200P	1	
C1045	ECJOEB1E103K	C. CAPACITOR CH 25V 0.01U	1		C1522	ECJOEB1C223K	C. CAPACITOR CH 16V 0.022U	1	
C1047	F1G1C473A004	C. CAPACITOR CH 16V 0.047U	1		C1525	ECJOEB1E103K	C. CAPACITOR CH 25V 0.01U	1	
C1050	ECJ2FB1C225K	C. CAPACITOR CH 16V 2.2U	1		C1526	ECJOEC1H221J	C. CAPACITOR CH 50V 220P	1	
C1201, 02	EEFCB0D151R	E. CAPACITOR 2V 150U	2		C1527	ECJ3YB1C106K	C. CAPACITOR CH 16V 10U	1	
C1203	ECJ2FB0J106K	C. CAPACITOR CH 50V 10U	1		C1529	ECJ3YB1C106K	C. CAPACITOR CH 16V 10U	1	
C1204	ECJOEB1H331K	C. CAPACITOR CH 50V 330P	1		C1530	F1G1C473A004	C. CAPACITOR CH 16V 0.047U	1	
C1207	F1G1C473A004	C. CAPACITOR CH 16V 0.047U	1		C1531	ECJOEC1H151J	C. CAPACITOR CH 50V 150P	1	
C1208	ECJ3YB1C106K	C. CAPACITOR CH 16V 10U	1		C1532	F1H1C105A095	C. CAPACITOR CH 16V 1U	1	

Components identified with the mark Δ have the special characteristics for safety.
When replacing any of these components, use only the same type.

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C1535, 36	F1H1C105A095	C. CAPACITOR CH 16V 1U	2		D1201	MA22D2800L	D1ODE	1	
C1537-39	ECJ3YB1C106K	C. CAPACITOR CH 16V 10U	3		D1202, 03	BOJCMD000024	D1ODE	2	
C1540	ECJ2FB1C475K	C. CAPACITOR CH 16V 4.7U	1		D1204-06	MA22D2800L	D1ODE	3	
C1541-45	ECJOEB1H331K	C. CAPACITOR CH 50V 330P	5		D1301-06	MA2S11100L	D1ODE	6	
C1547, 48	ECJOEC1H221J	C. CAPACITOR CH 50V 220P	2		D1308	MA22D2800L	D1ODE	1	
C1549	ECJ2FB1A475K	C. CAPACITOR CH 10V 4.7U	1		D1309	BOJCMD000024	D1ODE	1	
C1550, 51	ECJ2FB0J106K	C. CAPACITOR CH 50V 10U	2		D1310	MA8130-M	D1ODE	1	
C1553, 54	ECJOEC1H221J	C. CAPACITOR CH 50V 220P	2		D1311	MA2S11100L	D1ODE	1	
C1555, 56	ECJ2FB0J106K	C. CAPACITOR CH 50V 10U	2		D1314	MA22D2800L	D1ODE	1	
C1557	EEFCX0G151	E. CAPACITOR 4V 150U	1		D1316	BOJCMD000024	D1ODE	1	
C1558, 59	ECJ3YB1E106K	C. CAPACITOR CH 25V 10U	2		D1317	MA22D2800L	D1ODE	1	
C1560	ECJ2FB1E105K	C. CAPACITOR CH 25V 1U	1		D1501-06	MA2S11100L	D1ODE	6	
C1561	ECJ1VB1H104K	C. CAPACITOR CH 50V 0.1U	1		D1508	MA22D2800L	D1ODE	1	
C1562	ECJ3YB1E106K	C. CAPACITOR CH 25V 10U	1		D1509	BOJCPD000030	D1ODE	1	
C1563	F1H1C105A095	C. CAPACITOR CH 16V 1U	1		D1510	MA2Z00100L	D1ODE	1	
C1565	ECJ2FB0J106K	C. CAPACITOR CH 50V 10U	1		D1511, 12	BOHCM000014	D1ODE	2	
C1566	F1H1C105A095	C. CAPACITOR CH 16V 1U	1		D1513	MA2Z00100L	D1ODE	1	
C1567	ECJ2FB1A475K	C. CAPACITOR CH 10V 4.7U	1		D1515	MAZ81800HL	D1ODE	1	
C1569, 70	ECJ1VB1H104K	C. CAPACITOR CH 50V 0.1U	2		D1516	MA2S11100L	D1ODE	1	
C1571	ECJ2FB0J106K	C. CAPACITOR CH 50V 10U	1		D1517	MA3S132DOL	D1ODE	1	
C1572	F3G1C106A028	T. CAPACITOR CH 16V 10U	1		D1521	MA22D2800L	D1ODE	1	
C1573	ECJ2FB1A475K	C. CAPACITOR CH 10V 4.7U	1		D1522	MA2S11100L	D1ODE	1	
C1574	F1H1C105A095	C. CAPACITOR CH 16V 1U	1		D1701	MA3S132EOL	D1ODE	1	
C1575	ECJOEB1E103K	C. CAPACITOR CH 25V 0.01U	1		D1702, 03	MA2S11100L	D1ODE	2	
C1576	EEFCX0G151	E. CAPACITOR 4V 150U	1		D1706, 07	BOJCMD000024	D1ODE	2	
C1577	ECJ2FB0J106K	C. CAPACITOR CH 50V 10U	1		D1708	BOHCM000014	D1ODE	1	
C1578	ECJOEB1E103K	C. CAPACITOR CH 25V 0.01U	1		D1709, 10	MAZ80820HL	D1ODE	2	
C1586	ECJ1VB1C683K	C. CAPACITOR CH 16V 0.063U	1		D1711, 12	MA2S11100L	D1ODE	2	
C1587	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1		D1713	MAZ82200ML	D1ODE	1	
C1588	ECJ1VB1H104K	C. CAPACITOR CH 50V 0.1U	1		D1714, 15	MAZ82700ML	D1ODE	2	
C1589	ECJOEB1H271K	C. CAPACITOR CH 50V 270P	1		D1716	MA2S11100L	D1ODE	1	
C1594	ECJOEB1E103K	C. CAPACITOR CH 25V 0.01U	1		D1718	BOHCM000014	D1ODE	1	
C1701	F1H1C22A074	C. CAPACITOR CH 16V 0.22U	1		D1719	BOJCMD000024	D1ODE	1	
C1702	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1						
C1703	ECJ2VB1H223K	C. CAPACITOR CH 50V 0.022U	1		Δ F1001	K5H8013A0025	FUSE	1	
C1704	ECJ3YB1C106K	C. CAPACITOR CH 16V 10U	1						
C1705	ECJOEB1H331K	C. CAPACITOR CH 50V 330P	1		IC1003	C0CBABB00075	IC	1	
C1706, 07	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	2		IC1004	C0EBD0000224	IC	1	
C1709, 10	ECJ2FB1A475K	C. CAPACITOR CH 10V 4.7U	2		IC1006	C0EBH0000254	IC	1	
C1711	ECJ1VB1H104K	C. CAPACITOR CH 50V 0.1U	1		IC1007	C0EBC0000090	IC	1	
C1712	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		IC1201	C0DBAYY00392	IC	1	
C1713, 14	ECJOEB1H561K	C. CAPACITOR CH 50V 560P	2		IC1301	C0DBAZZ00094	IC	1	
C1715-17	F1L2A105A010	C. CAPACITOR CH100V 1U	3		IC1501	C0DBAZZ00094	IC	1	
C1718	ECJOEB1E103K	C. CAPACITOR CH 25V 0.01U	1		IC1502	C0DBAHA00020	IC	1	
C1719	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		IC1703-05	C0DBAYY00386	IC	3	
C1720	F1H1C105A095	C. CAPACITOR CH 16V 1U	1		IC1708	C0BBAB000020	IC	1	
C1721, 22	ECJ2FB1A475K	C. CAPACITOR CH 10V 4.7U	2						
C1724, 25	ECJ2FB1A475K	C. CAPACITOR CH 10V 4.7U	2		L1001	JOJHC0000018	ELECTRICAL FILTERFILTER	1	
C1728-30	F1L2A105A010	C. CAPACITOR CH100V 1U	3		L1002	G1C3R0ZA0049	COIL 3UH	1	
C1735, 36	ECJOEB1E103K	C. CAPACITOR CH 25V 0.01U	2		L1201	G1C2R2MA0182	COIL 2.2UH	1	
C1740, 41	ECJOEB1E103K	C. CAPACITOR CH 25V 0.01U	2		L1202	G1C100MA0106	COIL 10UH	1	
C1742	ECJ2FB1E105K	C. CAPACITOR CH 25V 1U	1		L1203, 04	JOJBC0000107	ELECTRICAL FILTERFILTER	2	
					L1205	G1C220Z00008	COIL 22UH	1	
CN1001	K1KA06BA0104	CONNECTOR (MALE)	1		L1206	G1C4R7MA0072	COIL 4.7UH	1	
CN1002	K1KYCOAA0555	CONNECTOR	1		L1207	G1C2R2MA0182	COIL 2.2UH	1	
					L1301-04	JOJBC0000107	ELECTRICAL FILTERFILTER	4	
D1003	D4ED18R00008	VARISTOR	1		L1305	G1C101MA0024	COIL 100UH	1	
D1004	BOFCAM000002	D1ODE	1		L1306	G1C220Z00008	COIL 22UH	1	
D1007	MA3S132EOL	D1ODE	1		L1307	G1A150GA0032	COIL 15UH	1	
D1013	MAZ81000HL	D1ODE	1		L1308	G1C680MA0226	COIL 68UH	1	
D1014	MAZ80910HL	D1ODE	1		L1309	G1C4R7ZA0040	COIL 4.7UH	1	
D1016	MA8100-M	D1ODE	1		L1310, 11	G1C2R2ZA0040	COIL 2.2UH	2	
D1017	MA3S132DOL	D1ODE	1		L1312	G1C4R7MA0072	COIL 4.7UH	1	
D1021	MAZ80510ML	D1ODE	1		L1313	G1C4R7ZA0040	COIL 4.7UH	1	
D1022, 23	MAZ80560ML	D1ODE	2		L1314	G1C4R7MA0072	COIL 4.7UH	1	
D1024	BOADDJO00019	D1ODE	1		L1501-05	JOJBC0000107	ELECTRICAL FILTERFILTER	5	
D1025	MA3S132EOL	D1ODE	1		L1506	G1C680MA0226	COIL 68UH	1	
D1028	MA2S11100L	D1ODE	1		L1507	G1C470MA0090	COIL 47UH	1	
D1029	MA3S132EOL	D1ODE	1		L1508	G1C220MA0226	COIL 22UH	1	
D1032, 33	MA2S11100L	D1ODE	2		L1509	G1C220Z00008	COIL 22UH	1	
D1034	MA8043-M	D1ODE	1		L1510-13	G1C100KA0055	COIL 10UH	4	
D1035	MAZ80360HL	D1ODE	1		L1514	G1C4R7ZA0040	COIL 4.7UH	1	
D1036	MAZ80300LL	D1ODE	1		L1515	G1C3R9MA0024	COIL 3.9UH	1	
D1037	MAZ80360HL	D1ODE	1		L1516	G1C4R7ZA0040	COIL 4.7UH	1	
D1038	MA8043-M	D1ODE	1		L1517	G1C3R9MA0024	COIL 3.9UH	1	
D1040	MA3S132EOL	D1ODE	1		L1518	JOJBC0000107	ELECTRICAL FILTERFILTER	1	
D1041	MA2S11100L	D1ODE	1		L1701, 02	G1C680MA0024	COIL 68UH	2	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks	Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
L1703	G1C220MA0226	COIL 22UH	1		R1057	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	1	
L1704-06	G1C100KA0055	COIL 10UH	3		R1060	DOYAR0000007	M. RESISTOR CH 1/16W 0	1	
L1707-09	JOJBC0000107	ELECTRICAL FILTER	3		R1062	ERJ2RHD683	M. RESISTOR CH 1/16W 68K	1	
Q1003	2SD2216JOL	TRANSISTOR	1		R1063	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	1	
Q1004	UNR9214JOL	TRANSISTOR	1		R1065	ERJ2GEJ102	M. RESISTOR CH 1/16W 1K	1	
Q1005	UNR9113JOL	TRANSISTOR	1		R1069, 70	ERJ3GEYJ222	M. RESISTOR CH 1/16W 2.2K	2	
Q1006	2SB1462JOL	TRANSISTOR	1		R1072	ERJ2RKD224	M. RESISTOR CH 1/16W 220K	1	
Q1007	UNR9113JOL	TRANSISTOR	1		R1073	ERJ2GEJ105	M. RESISTOR CH 1/16W 1M	1	
Q1009	B1CHRD000001	TRANSISTOR	1		R1075	ERJ2GEJ105	M. RESISTOR CH 1/16W 1M	1	
Q1010	UNR9113JOL	TRANSISTOR	1		R1076	ERJ2RKD154	M. RESISTOR CH 1/16W 150K	1	
Q1012	XP0421600L	TRANSISTOR	1		R1077	ERJ2RHD333	M. RESISTOR CH 1/16W 33K	1	
Q1013	UNR9215JOL	TRANSISTOR	1		R1078	ERJ2RHD223	M. RESISTOR CH 1/16W 22K	1	
Q1014	UNR9113JOL	TRANSISTOR	1		R1081, 82	ERJ3GEYJ151	M. RESISTOR CH 1/16W 150	2	
Q1015	UNR9215JOL	TRANSISTOR	1		R1083, 84	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	2	
Q1016	UNR9113JOL	TRANSISTOR	1		R1095	ERJ2RKD124	M. RESISTOR CH 1/16W 120K	1	
Q1018	B1CBGD000001	TRANSISTOR	1		R1096	ERJ2RHD683	M. RESISTOR CH 1/16W 68K	1	
Q1020	UNR9213JOL	TRANSISTOR	1		R1097	ERJ2RHD273	M. RESISTOR CH 1/16W 27K	1	
Q1021, 22	B1CHGD000006	TRANSISTOR	2		R1098	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	1	
Q1023	2SD2216JOL	TRANSISTOR	1		R1099	ERJ2RKD124	M. RESISTOR CH 1/16W 120K	1	
Q1025	UNR9113JOL	TRANSISTOR	1		R1100	ERJ2RHD683	M. RESISTOR CH 1/16W 68K	1	
Q1027-40	XP0450100L	TRANSISTOR	14		R1101	ERJ2RKD224	M. RESISTOR CH 1/16W 220K	1	
Q1041	B1CBGD000001	TRANSISTOR	1		R1102	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	1	
Q1042	2SB1218AOL	TRANSISTOR	1		R1103	ERJ2RKD124	M. RESISTOR CH 1/16W 120K	1	
Q1043, 44	2SD2216JOL	TRANSISTOR	2		R1104	ERJ2RHD683	M. RESISTOR CH 1/16W 68K	1	
Q1045	UNR9113JOL	TRANSISTOR	1		R1105	ERJ2RKD224	M. RESISTOR CH 1/16W 220K	1	
Q1047	UNR9113JOL	TRANSISTOR	1		R1106	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	1	
Q1201, 02	B1MBEDA00015	TRANSISTOR	2		R1107	DOYAR0000007	M. RESISTOR CH 1/16W 0	1	
Q1301	UNR9113JOL	TRANSISTOR	1		R1108	ERJ2RKD124	M. RESISTOR CH 1/16W 120K	1	
Q1302	2SD2216JOL	TRANSISTOR	1		R1109	ERJ2RHD683	M. RESISTOR CH 1/16W 68K	1	
Q1303, 04	XP0450100L	TRANSISTOR	2		R1110	ERJ2RKD124	M. RESISTOR CH 1/16W 120K	1	
Q1306	2SD2216JOL	TRANSISTOR	1		R1111	ERJ2RHD683	M. RESISTOR CH 1/16W 68K	1	
Q1307	B1CHGD000008	TRANSISTOR	1		R1112	ERJ2RKD224	M. RESISTOR CH 1/16W 220K	1	
Q1308-11	XP0440100L	TRANSISTOR	4		R1113	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	1	
Q1312	B1CFRD000002	TRANSISTOR	1		R1114	ERJ2RHD223	M. RESISTOR CH 1/16W 22K	1	
Q1313, 14	B1CHGD000009	TRANSISTOR	2		R1115	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	1	
Q1315	B1DHBC000005	TRANSISTOR	1		R1116	ERJ2RKD124	M. RESISTOR CH 1/16W 120K	1	
Q1317	B1DFCD000012	TRANSISTOR	1		R1117	ERJ2RHD683	M. RESISTOR CH 1/16W 68K	1	
Q1501	UNR9113JOL	TRANSISTOR	1		R1118	ERJ2RKD124	M. RESISTOR CH 1/16W 120K	1	
Q1502	2SD2216JOL	TRANSISTOR	1		R1119	ERJ2RHD683	M. RESISTOR CH 1/16W 68K	1	
Q1503, 04	XP0450100L	TRANSISTOR	2		R1121	ERJ2RHD683	M. RESISTOR CH 1/16W 68K	1	
Q1505	2SD2216JOL	TRANSISTOR	1		R1122	ERJ2RHD393	M. RESISTOR CH 1/16W 39K	1	
Q1507	2SD2216JOL	TRANSISTOR	1		R1123	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	1	
Q1510-14	XP0440100L	TRANSISTOR	5		R1124	ERJ2RHD823	M. RESISTOR CH 1/16W 82K	1	
Q1515	B1DFDL000003	TRANSISTOR	1		R1125	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	1	
Q1516	B1CFRD000002	TRANSISTOR	1		R1126	ERJ2RKD684	M. RESISTOR CH 1/16W 680K	1	
Q1517	B1DHBC000005	TRANSISTOR	1		R1127	ERJ2RHD683	M. RESISTOR CH 1/16W 68K	1	
Q1518	B1CHGD000009	TRANSISTOR	1		R1128	ERJ2RKD124	M. RESISTOR CH 1/16W 120K	1	
Q1519	B1DHBC000005	TRANSISTOR	1		R1129	ERJ2RHD683	M. RESISTOR CH 1/16W 68K	1	
Q1520	B1CHGD000009	TRANSISTOR	1		R1130	ERJ2RKD124	M. RESISTOR CH 1/16W 120K	1	
Q1521	XP0421600L	TRANSISTOR	1		R1131	ERJ2RHD683	M. RESISTOR CH 1/16W 68K	1	
Q1523	2SD2216JOL	TRANSISTOR	1		R1132	ERJ2RKD124	M. RESISTOR CH 1/16W 120K	1	
Q1701	UNR9111JOL	TRANSISTOR	1		R1133	ERJ2RHD683	M. RESISTOR CH 1/16W 68K	1	
Q1704	UNR9214JOL	TRANSISTOR	1		R1134	ERJ2RKD124	M. RESISTOR CH 1/16W 120K	1	
Q1705	B1CHGD000008	TRANSISTOR	1		R1135	ERJ2RHD683	M. RESISTOR CH 1/16W 68K	1	
Q1706	XP0440100L	TRANSISTOR	1		R1136	ERJ2RKD124	M. RESISTOR CH 1/16W 120K	1	
Q1707, 08	B1DFCD000012	TRANSISTOR	2		R1137	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	1	
Q1709	B1DFCL000008	TRANSISTOR	1		R1138	ERJ2RKD154	M. RESISTOR CH 1/16W 150K	1	
Q1715	XP0450100L	TRANSISTOR	1		R1139	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	1	
					R1140	ERJ2RKD124	M. RESISTOR CH 1/16W 120K	1	
					R1141	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	1	
R1009	DOYAR0000007	M. RESISTOR CH 1/16W 0	1		R1142	ERJ2RKD224	M. RESISTOR CH 1/16W 220K	1	
R1019	ERJ2RHD104	M. RESISTOR CH 1/16W 100K	1		R1143	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	1	
R1024	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	1		R1144	ERJ2RKD124	M. RESISTOR CH 1/16W 120K	1	
R1025	ERJ2RHD223	M. RESISTOR CH 1/16W 22K	1		R1145	ERJ2RHD683	M. RESISTOR CH 1/16W 68K	1	
R1028	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1		R1146	ERJ2RKD124	M. RESISTOR CH 1/16W 120K	1	
R1031	ERJ2GEJ472	M. RESISTOR CH 1/16W 4.7K	1		R1147	ERJ2RHD683	M. RESISTOR CH 1/16W 68K	1	
R1032	ERJ2RHD273	M. RESISTOR CH 1/16W 27K	1		R1148	ERJ2RKD124	M. RESISTOR CH 1/16W 120K	1	
R1034-36	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	3		R1149	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	1	
R1038	ERJ2RHD222	M. RESISTOR CH 1/16W 2.2M	1		R1150	ERJ2RKD224	M. RESISTOR CH 1/16W 220K	1	
R1039	ERJ2RHD104	M. RESISTOR CH 1/16W 100K	1		R1151	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	1	
R1041	ERJ2GEJ334	M. RESISTOR CH 1/16W 330K	1		R1152	ERJ2RKD124	M. RESISTOR CH 1/16W 120K	1	
R1042, 43	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	2		R1153	DOYAR0000007	M. RESISTOR CH 1/16W 0	1	
R1045	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1		R1154	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	1	
R1048	ERJ2GEJ102	M. RESISTOR CH 1/16W 1K	1		R1155	ERJ2RHD104	M. RESISTOR CH 1/16W 100K	1	
R1050, 51	ERJ2GEJ102	M. RESISTOR CH 1/16W 1K	2		R1156	ERJ2RKD224	M. RESISTOR CH 1/16W 220K	1	
R1053	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1		R1159	ERJ2RHD223	M. RESISTOR CH 1/16W 22K	1	
R1054	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	1		R1160, 61	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	2	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks	Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
R1166	ERJ2GEJ104	M. RESISTOR CH 1/16W 100K	1		R1374	ERJ2RHD104	M. RESISTOR CH 1/16W 100K	1	
R1167	ERJ2GEJ224	M. RESISTOR CH 1/16W 220K	1		R1376	ERJ2RHD104	M. RESISTOR CH 1/16W 100K	1	
R1201	DOYAR0000007	M. RESISTOR CH 1/16W 0	1		R1379	ERJ2RHD104	M. RESISTOR CH 1/16W 100K	1	
R1202	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1		R1383	ERJ2RHD104	M. RESISTOR CH 1/16W 100K	1	
R1203	DOYAR0000007	M. RESISTOR CH 1/16W 0	1		R1386	ERJ2RHD104	M. RESISTOR CH 1/16W 100K	1	
R1204	ERJ2RHD183	M. RESISTOR CH 1/16W 18K	1		R1387	ERJ2RHD222	M. RESISTOR CH 1/16W 2. 2M	1	
R1205	ERJ2GEJ101	M. RESISTOR CH 1/16W 100	1		R1388	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	1	
R1206	ERJ2RHD333	M. RESISTOR CH 1/16W 33K	1		R1501-03	DOYAR0000007	M. RESISTOR CH 1/16W 0	3	
R1208	DOYAR0000007	M. RESISTOR CH 1/16W 0	1		R1504	ERJ2RHD683	M. RESISTOR CH 1/16W 68K	1	
R1210	ERJ2GEJ101	M. RESISTOR CH 1/16W 100	1		R1505	ERJ2RHD223	M. RESISTOR CH 1/16W 22K	1	
R1211-14	ERJ3RSJR10	M. RESISTOR CH 1/16W 0. 1	4		R1507	ERJ2GEJ102	M. RESISTOR CH 1/16W 1K	1	
R1215	ERJ6GEYOR00	M. RESISTOR CH 1/10W 0	1		R1508	ERJ2RHD752	M. RESISTOR CH 1/16W 7. 5K	1	
R1217	ERJ2RHD104	M. RESISTOR CH 1/16W 100K	1		R1509	ERJ2RHD393	M. RESISTOR CH 1/16W 39K	1	
R1218-21	ERJ3RSJR10	M. RESISTOR CH 1/16W 0. 1	4		R1511	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1	
R1222	ERJ2GEJ101	M. RESISTOR CH 1/16W 100	1		R1512	ERJ2GEJ102	M. RESISTOR CH 1/16W 1K	1	
R1223	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1		R1513	ERJ2RHD333	M. RESISTOR CH 1/16W 33K	1	
R1224	ERJ2RHD223	M. RESISTOR CH 1/16W 22K	1		R1514	ERJ2RHD223	M. RESISTOR CH 1/16W 22K	1	
R1225	DOYAR0000007	M. RESISTOR CH 1/16W 0	1		R1515	ERJ2RHD821	M. RESISTOR CH 1/16W 820	1	
R1226	ERJ2GEJ101	M. RESISTOR CH 1/16W 100	1		R1516	DOYAR0000007	M. RESISTOR CH 1/16W 0	1	
R1227	ERJ2RHD683	M. RESISTOR CH 1/16W 68K	1		R1517	ERJ2RHD243	M. RESISTOR CH 1/16W 24K	1	
R1228	DOYAR0000007	M. RESISTOR CH 1/16W 0	1		R1518, 19	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	2	
R1232	ERJ2RHD104	M. RESISTOR CH 1/16W 100K	1		R1522	ERJ2RHD681	M. RESISTOR CH 2W 680	1	
R1234	ERJ2RHD104	M. RESISTOR CH 1/16W 100K	1		R1523	ERJ2RHD223	M. RESISTOR CH 1/16W 22K	1	
R1236	ERJ2RHD104	M. RESISTOR CH 1/16W 100K	1		R1527, 28	ERJ2RHD153	M. RESISTOR CH 1/16W 15K	2	
R1238	ERJ2RHD104	M. RESISTOR CH 1/16W 100K	1		R1529	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1	
R1301	ERJ2GEJ101	M. RESISTOR CH 1/16W 100	1		R1530	ERJ2RHD273	M. RESISTOR CH 1/16W 27K	1	
R1302-04	DOYAR0000007	M. RESISTOR CH 1/16W 0	3		R1531	ERJ2RHD153	M. RESISTOR CH 1/16W 15K	1	
R1305	ERJ2RHD683	M. RESISTOR CH 1/16W 68K	1		R1532	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1	
R1306	ERJ2RHD223	M. RESISTOR CH 1/16W 22K	1		R1534	ERJ2RHD153	M. RESISTOR CH 1/16W 15K	1	
R1308	ERJ2RHD752	M. RESISTOR CH 1/16W 7. 5K	1		R1537	ERJ2RHD333	M. RESISTOR CH 1/16W 33K	1	
R1309	DOYAR0000007	M. RESISTOR CH 1/16W 0	1		R1538	ERJ2RHD561	M. RESISTOR CH 1/16W 560	1	
R1311	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1		R1539	ERJ2RHD273	M. RESISTOR CH 1/16W 27K	1	
R1312	DOYAR0000007	M. RESISTOR CH 1/16W 0	1		R1542	ERJ2RHD153	M. RESISTOR CH 1/16W 15K	1	
R1313	ERJ2RHD333	M. RESISTOR CH 1/16W 33K	1		R1543	DOYAR0000007	M. RESISTOR CH 1/16W 0	1	
R1314	DOYAR0000007	M. RESISTOR CH 1/16W 0	1		R1544	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1	
R1315	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	1		R1545	DOYAR0000007	M. RESISTOR CH 1/16W 0	1	
R1316, 17	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	2		R1546	ERJ2RHD223	M. RESISTOR CH 1/16W 22K	1	
R1318	ERJ2RHD271	M. RESISTOR CH 1/16W 270	1		R1547	ERJ2RHD152	M. RESISTOR CH 1/16W 1. 5K	1	
R1319	ERJ2RHD223	M. RESISTOR CH 1/16W 22K	1		R1548	ERJ2RHD273	M. RESISTOR CH 1/16W 27K	1	
R1320	DOYAR0000007	M. RESISTOR CH 1/16W 0	1		R1549	DOYAR0000007	M. RESISTOR CH 1/16W 0	1	
R1322	ERJ2GEJ123	M. RESISTOR CH 1/16W 12K	1		R1550	ERJ2RKD224	M. RESISTOR CH 1/16W 220K	1	
R1323	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1		R1553	ERJ2RHD273	M. RESISTOR CH 1/16W 27K	1	
R1324	ERJ2RHD273	M. RESISTOR CH 1/16W 27K	1		R1554	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1	
R1325	ERJ2RHD153	M. RESISTOR CH 1/16W 15K	1		R1555	DOYAR0000007	M. RESISTOR CH 1/16W 0	1	
R1326	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1		R1556	ERJ2RHD273	M. RESISTOR CH 1/16W 27K	1	
R1327	ERJ2RHD153	M. RESISTOR CH 1/16W 15K	1		R1563-67	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	5	
R1329	ERJ2RHD223	M. RESISTOR CH 1/16W 22K	1		R1569	ERJ8RQJR27	M. RESISTOR CH 1/8W 0. 27	1	
R1330	ERJ2RHD222	M. RESISTOR CH 1/16W 2. 2M	1		R1572	ERJ8RSJR10	M. RESISTOR CH 1/8W 0. 1	1	
R1331	ERJ2RHD273	M. RESISTOR CH 1/16W 27K	1		R1575, 76	ERJ8RSJR10	M. RESISTOR CH 1/8W 0. 1	2	
R1333	ERJ2RHD243	M. RESISTOR CH 1/16W 24K	1		R1577	ERJ8RQJR22	M. RESISTOR CH 1/8W 0. 22	1	
R1335	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1		R1579	ERJ2RHD182	M. RESISTOR CH 1/16W 1. 8K	1	
R1336	DOYAR0000007	M. RESISTOR CH 1/16W 0	1		R1580, 81	ERJ2GEJ101	M. RESISTOR CH 1/16W 100	2	
R1337	ERJ2RHD183	M. RESISTOR CH 1/16W 18K	1		R1582	ERJ2RHD182	M. RESISTOR CH 1/16W 1. 8K	1	
R1338	ERJ2RHD182	M. RESISTOR CH 1/16W 1. 8K	1		R1583	ERJ2GEJ101	M. RESISTOR CH 1/16W 100	1	
R1339	ERJ2RHD273	M. RESISTOR CH 1/16W 27K	1		R1584	ERJ2RHD182	M. RESISTOR CH 1/16W 1. 8K	1	
R1340	DOYAR0000007	M. RESISTOR CH 1/16W 0	1		R1585	ERJ2GEJ101	M. RESISTOR CH 1/16W 100	1	
R1341	ERJ2RKD154	M. RESISTOR CH 1/16W 150K	1		R1586	ERJ2RHD182	M. RESISTOR CH 1/16W 1. 8K	1	
R1344	ERJ2RHD273	M. RESISTOR CH 1/16W 27K	1		R1587	ERJ2GEJ101	M. RESISTOR CH 1/16W 100	1	
R1345	DOYAR0000007	M. RESISTOR CH 1/16W 0	1		R1588	ERJ2RHD182	M. RESISTOR CH 1/16W 1. 8K	1	
R1346	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1		R1591	ERJ2RHD104	M. RESISTOR CH 1/16W 100K	1	
R1347	ERJ2RHD222	M. RESISTOR CH 1/16W 2. 2M	1		R1593, 94	ERJ2RHD104	M. RESISTOR CH 1/16W 100K	2	
R1348	ERJ2RHD104	M. RESISTOR CH 1/16W 100K	1		R1597	ERJ2RHD104	M. RESISTOR CH 1/16W 100K	1	
R1349	ERJ2GEJ105	M. RESISTOR CH 1/16W 1M	1		R1599	ERJ2RHD104	M. RESISTOR CH 1/16W 100K	1	
R1353-55	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	3		R1600	ERJ8GEYJ100	M. RESISTOR CH 1/8W 10	1	
R1357	ERJ8RSJR10	M. RESISTOR CH 1/8W 0. 1	1		R1601	ERJ2RHD104	M. RESISTOR CH 1/16W 100K	1	
R1360	ERJ8RSJR10	M. RESISTOR CH 1/8W 0. 1	1		R1604	ERJ8GEYJ151	M. RESISTOR CH 1/8W 150	1	
R1362	ERJ8RQJR22	M. RESISTOR CH 1/8W 0. 22	1		R1606	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1	
R1364	ERJ2GEJ101	M. RESISTOR CH 1/16W 100	1		R1607	ERJ2GEJ105	M. RESISTOR CH 1/16W 1M	1	
R1365	ERJ2RHD182	M. RESISTOR CH 1/16W 1. 8K	1		R1608	ERJ2RKD474	M. RESISTOR CH 1/10W 470K	1	
R1366	ERJ2GEJ101	M. RESISTOR CH 1/16W 100	1		R1609	ERJ2GEJ105	M. RESISTOR CH 1/16W 1M	1	
R1367	ERJ2RHD182	M. RESISTOR CH 1/16W 1. 8K	1		R1610	ERJ2RKD684	M. RESISTOR CH 1/16W 680K	1	
R1368	ERJ2GEJ101	M. RESISTOR CH 1/16W 100	1		R1611	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	1	
R1369	ERJ2RHD182	M. RESISTOR CH 1/16W 1. 8K	1		R1612	ERJ2RKD154	M. RESISTOR CH 1/16W 150K	1	
R1370	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	1		R1613	ERJ2RHD223	M. RESISTOR CH 1/16W 22K	1	
R1371	ERJ8RQJR22	M. RESISTOR CH 1/8W 0. 22	1		R1614	ERJ2RHD122	M. RESISTOR CH 1/16W 1. 2K	1	
R1372	ERJ2RHD182	M. RESISTOR CH 1/16W 1. 8K	1		R1615	ERJ6GEYOR00	M. RESISTOR CH 1/10W 0	1	
R1373	ERJ2GEJ101	M. RESISTOR CH 1/16W 100	1		R1616	ERJ2RHD563	M. RESISTOR CH 1/16W 56K	1	

Components identified with the mark have the special characteristics for safety. When replacing any of these components, use only the same type.

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
R1617	DOYAR0000007	M. RESISTOR CH 1/16W 0	1	
R1618	ERJ6GEYF822	M. RESISTOR CH 1/10W 8.2K	1	
R1626	DOYAR0000007	M. RESISTOR CH 1/16W 0	1	
R1627-29	ERJ8RSJR15	M. RESISTOR CH 1/8W 0.15	3	
R1630	ERJ2GEJ102	M. RESISTOR CH 1/16W 1K	1	
R1631	DOYAR0000007	M. RESISTOR CH 1/16W 0	1	
R1634	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1	
R1635	ERJ2RHD273	M. RESISTOR CH 1/16W 27K	1	
R1701	ERJ2RHD223	M. RESISTOR CH 1/16W 22K	1	
R1703	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1	
R1705	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1	
R1706	ERJ2RHD222	M. RESISTOR CH 1/16W 2.2M	1	
R1707	ERJ2RHD104	M. RESISTOR CH 1/16W 100K	1	
R1712	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	1	
R1713	ERJ8RQJR24	M. RESISTOR CH 1/8W 0.24	1	
R1714	ERJ2GEJ101	M. RESISTOR CH 1/16W 100	1	
R1715	ERJ2RHD122	M. RESISTOR CH 1/16W 1.2K	1	
R1720	ERJ2RKD474	M. RESISTOR CH 1/10W 470K	1	
R1721	ERJ2RKD684	M. RESISTOR CH 1/16W 680K	1	
R1723, 24	DOYAR0000007	M. RESISTOR CH 1/16W 0	2	
R1725, 26	ERJ2RHD104	M. RESISTOR CH 1/16W 100K	2	
R1729	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	1	
R1730	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1	
R1731	ERJ2RHD111	M. RESISTOR CH 1/16W 110	1	
R1732	ERJ2RHD563	M. RESISTOR CH 1/16W 56K	1	
R1733	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1	
R1734	ERJ2RHD391	M. RESISTOR CH 1/16W 390	1	
R1735	ERJ2RKD204	M. RESISTOR CH 1/16W 20K	1	
R1737	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1	
R1738	ERJ2RKD274	M. RESISTOR CH 1/16W 270K	1	
R1739	ERJ2RKD204	M. RESISTOR CH 1/16W 20K	1	
R1741, 42	DOYAR0000007	M. RESISTOR CH 1/16W 0	2	
R1743	ERJ2RHD223	M. RESISTOR CH 1/16W 22K	1	
R1744	ERJ2RKD474	M. RESISTOR CH 1/10W 470K	1	
R1745-47	ERJ2GEJ102	M. RESISTOR CH 1/16W 1K	3	
R1750	ERJ2RHD104	M. RESISTOR CH 1/16W 100K	1	
R1753	ERJ6GEYOR00	M. RESISTOR CH 1/10W 0	1	
R1757	DOYAR0000007	M. RESISTOR CH 1/16W 0	1	
R1760, 61	ERJ2RKD274	M. RESISTOR CH 1/16W 270K	2	
R1762	ERJ2RHD333	M. RESISTOR CH 1/16W 33K	1	
R1763	ERJ2RHD104	M. RESISTOR CH 1/16W 100K	1	
R1764	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	1	
R1765	ERJ2RKD184	M. RESISTOR CH 1/16W 180K	1	
R1766	ERJ2RHD683	M. RESISTOR CH 1/16W 68K	1	
R1767	ERJ2RKD124	M. RESISTOR CH 1/16W 120K	1	
R1768	ERJ2RHD683	M. RESISTOR CH 1/16W 68K	1	
R1769	ERJ2RKD684	M. RESISTOR CH 1/16W 680K	1	
R1771, 72	DOYAR0000007	M. RESISTOR CH 1/16W 0	2	
R1773	ERJ2RHD223	M. RESISTOR CH 1/16W 22K	1	
R1774	ERJ2RKD474	M. RESISTOR CH 1/10W 470K	1	
R1775	ERJ2RKD684	M. RESISTOR CH 1/16W 680K	1	
T1501	G5DYA0000124	SWITCHING TRANSFORMER	1	
		MISCELLANEOUS		
	VSC6076	SHIELD PLATE A	1	
	VSC6077	SHIELD PLATE B	1	
■ E7	VEP03H51A	REAR JACK P.C. BOARD	1 (RTL)	
CN300	K2HZ110E0003	JACK	1	
CN302	K1KB06BA0028	CONNECTOR (FEMALE)	1	
D300-03	D4ED12700007	DIODE	4	
D304	B0KB00000041	DIODE	1	
D305-07	D4ED1270A008	VARISTOR	3	
L300-03	J0JBC0000107	ELECTRICAL FILTER/FILTER	4	
△ PA300-03	K5H2012A0007	FUSE	4	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
R304-06	DOYAR0000007	M. RESISTOR CH 1/16W 0	3	
		MISCELLANEOUS		
	VJF1555	CONNECTOR HOLDER A	1	
	VJF1491	CONNECTOR HOLDER B	1	
	XYN2+J6FJ	SCREW	2	
■ E8	VEP04939A	REAR JACK 2 P.C. BOARD	1 (RTL)	
C303-07	ECJ0EB1H102K	C. CAPACITOR CH 50V 1000P	5	
C310	ECJ0EB1H102K	C. CAPACITOR CH 50V 1000P	1	
C312, 13	ECJ0EB1H102K	C. CAPACITOR CH 50V 1000P	2	
CN301	K1MN16AA0018	CONNECTOR	1	
D308, 09	D4ED1220A006	VARISTOR	2	
JK300	K2HC103B0202	JACK	1	
JK301	K2HC106B0010	AC POWER PLUG	1	
JK302	K2HD103B0015	JACK	1	
L306-08	J0JBC0000019	ELECTRICAL FILTER/FILTER	3	
R311-16	ERJ2GEJ331	M. RESISTOR CH 1/16W 330	6	
■ E9	VEP04938A	SIDE JACK P.C. BOARD	1 (RTL)	
C200	EEEFK1J4R7	E. CAPACITOR 63V 4.7U	1	
C204	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1	
C208, 09	ECJ0EF1C104Z	C. CAPACITOR CH 16V 0.1U	2	
C210	F3H1V106A049	T. CAPACITOR CH 35V 10U	1	
C214	ECJ1VF1H103Z	C. CAPACITOR CH 50V 0.01U	1	
C215, 16	ECJ1VB2A471K	C. CAPACITOR CH100V 470P	2	
C217, 18	F2A2A1050001	E. CAPACITOR 100V 1M	2	
C219	F1J2A104A023	C. CAPACITOR CH100V 0.1U	1	
C220	ECJ0EF1C104Z	C. CAPACITOR CH 16V 0.1U	1	
C221, 22	ECJ0EC1H330J	C. CAPACITOR CH 50V 33P	2	
C223	ECJ0EF1C104Z	C. CAPACITOR CH 16V 0.1U	1	
C224	ECJ0EC1H330J	C. CAPACITOR CH 50V 33P	1	
C225	ECJ0EF1C104Z	C. CAPACITOR CH 16V 0.1U	1	
C226	ECJ3YB1E106K	C. CAPACITOR CH 25V 10U	1	
C227, 28	ECJ0EF1C104Z	C. CAPACITOR CH 16V 0.1U	2	
C229, 30	ECJ3YB1E106K	C. CAPACITOR CH 25V 10U	2	
C231	ECJ0EF1C104Z	C. CAPACITOR CH 16V 0.1U	1	
C253	F2A1J330A452	E. CAPACITOR 63V 33U	1	
CN201	K1MN10BA0059	CONNECTOR	1	
D203	MA111	DIODE	1	
D207, 08	MA3J14300L	DIODE	2	
IC200	AN77L09M	IC	1	
IC201	COABB0000396	IC	1	
IC202	COABB0000271	IC	1	
IC203	COJBAR0000432	IC	1	
IC204	COABAB0000121	IC	1	
JK201	K1AB103A0011	CONNECTOR (FEMALE)	1	
L202-04	J0JBC0000014	ELECTRICAL FILTER/FILTER	3	
L205, 06	G1C100JA0041	COIL 10UH	2	
Q200	2SD182400L	TRANSISTOR	1	
Q201	2SB12200RL	TRANSISTOR	1	
Q202	2SD18210HL	TRANSISTOR	1	
Q203-06	UNR9213J0L	TRANSISTOR	4	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
Q207	UNR9113JOL	TRANSISTOR	1		R417	ERJ2RHD511	M. RESISTOR CH 1/16W 510	1	
Q208	UNR9213JOL	TRANSISTOR	1		R418	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	1	
					R419-23	ERJ2RHD472	M. RESISTOR CH 1/16W 4.7K	5	
R205	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1		R425	ERJ2RHD472	M. RESISTOR CH 1/16W 4.7K	1	
R209, 10	ERJ12YJ682	M. RESISTOR CH 1/2W 6.8K	2		R426	ERJ2RHD183	M. RESISTOR CH 1/16W 18K	1	
R211	ERJ2GEJ105	M. RESISTOR CH 1/16W 1M	1		R427	ERJ2RHD393	M. RESISTOR CH 1/16W 39K	1	
R212-14	ERJ2RHD104	M. RESISTOR CH 1/16W 100K	3		R428	ERJ2RHD104	M. RESISTOR CH 1/16W 100K	1	
R215	ERJ2GEJ474	M. RESISTOR CH 1/16W 470K	1		R429, 30	ERJ2RHD223	M. RESISTOR CH 1/16W 22K	2	
R216, 17	ERJ2RHD273	M. RESISTOR CH 1/16W 27K	2		R431	ERJ2RHD104	M. RESISTOR CH 1/16W 100K	1	
R218	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	1		R432, 33	ERJ2RHD223	M. RESISTOR CH 1/16W 22K	2	
R220	ERJ2RHD392	M. RESISTOR CH 1/16W 3.9K	1						
R221	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	1		SW401	KOD142A00023	SWITCH	1	
R222	ERJ2RHD393	M. RESISTOR CH 1/16W 39K	1						
R223	ERJ2GEJ105	M. RESISTOR CH 1/16W 1M	1						
R224	ERJ2RHD511	M. RESISTOR CH 1/16W 510	1						
R225	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	1						
R226-30	ERJ2RHD472	M. RESISTOR CH 1/16W 4.7K	5						
R232	ERJ2RHD472	M. RESISTOR CH 1/16W 4.7K	1		■ E11	VEP04943A	RCA JACK P. C. BOARD	1	(RTL)
R233	ERJ2RHD183	M. RESISTOR CH 1/16W 18K	1						
R234	ERJ2RHD393	M. RESISTOR CH 1/16W 39K	1						
R235, 36	ERJ2RHD104	M. RESISTOR CH 1/16W 100K	2		C205, 06	ECJ0EB1E682K	C. CAPACITOR CH 25V 6800P	2	
R237-40	ERJ2RHD223	M. RESISTOR CH 1/16W 22K	4		CN200	K1MN10BA0059	CONNECTOR	1	
					D200, 01	D4ED1220A006	VARISTOR	2	
SW200	KOD142A00023	SWITCH	1		D202	D4ED1270A008	VARISTOR	1	
■ E10	VEP04942A	SIDE JACK 2 P. C. BOARD	1	(RTL)					
C404	ECJ1VF1H103Z	C. CAPACITOR CH 50V 0.01U	1						
C405, 06	ECJ1VB2A471K	C. CAPACITOR CH100V 470P	2						
C407, 08	F2A2A1050001	E. CAPACITOR 100V 1M	2						
C409	F1J2A104A023	C. CAPACITOR CH100V 0.1U	1		■ E12	VEP03H49A	P2 CARD P. C. BOARD	1	(RTL)
C410	ECJ0EF1C104Z	C. CAPACITOR CH 16V 0.1U	1						
C411, 12	ECJ0EC1H330J	C. CAPACITOR CH 50V 33P	2						
C413	ECJ0EF1C104Z	C. CAPACITOR CH 16V 0.1U	1		C100	ECJ2FBOJ106K	C. CAPACITOR CH 50V 10U	1	
C414	ECJ0EC1H330J	C. CAPACITOR CH 50V 33P	1		C101, 02	ECJ0EB1A104K	C. CAPACITOR CH 10V 0.1U	2	
C415	ECJ0EF1C104Z	C. CAPACITOR CH 16V 0.1U	1		C103	ECJ0EB1H222K	C. CAPACITOR CH 50V 2200P	1	
C416	ECJ3YB1E106K	C. CAPACITOR CH 25V 10U	1		C104	ECJ2FBOJ106K	C. CAPACITOR CH 50V 10U	1	
C417, 18	ECJ0EF1C104Z	C. CAPACITOR CH 16V 0.1U	2		C105	ECJ0EB1A104K	C. CAPACITOR CH 10V 0.1U	1	
C419	ECJ3YB1E106K	C. CAPACITOR CH 25V 10U	1		C106, 07	ECJ2FBOJ106K	C. CAPACITOR CH 50V 10U	2	
C420	ECJ0EF1C104Z	C. CAPACITOR CH 16V 0.1U	1		C108	ECJ0EB1A104K	C. CAPACITOR CH 10V 0.1U	1	
C421	ECJ3YB1E106K	C. CAPACITOR CH 25V 10U	1		C109	ECJ2FBOJ106K	C. CAPACITOR CH 50V 10U	1	
					C110	ECJ0EB1A104K	C. CAPACITOR CH 10V 0.1U	1	
CN401	K1MN10BA0059	CONNECTOR	1		C111, 12	ECJ2FBOJ106K	C. CAPACITOR CH 50V 10U	2	
					C113	ECJ0EB1A104K	C. CAPACITOR CH 10V 0.1U	1	
D404, 05	MA3J14300L	DIODE	2		C114	ECJ2FBOJ106K	C. CAPACITOR CH 50V 10U	1	
					C115	ECJ0EB1A104K	C. CAPACITOR CH 10V 0.1U	1	
IC401	COABBB000396	IC	1		C116	ECJ0EB1C223K	C. CAPACITOR CH 16V 0.022U	1	
IC402	COABBB000271	IC	1		C117	ECJ0EB1A104K	C. CAPACITOR CH 10V 0.1U	1	
IC403	COJBAR000432	IC	1		C118	ECJ0EB1C223K	C. CAPACITOR CH 16V 0.022U	1	
IC404	COABAB000121	IC	1		C119-21	EEFUEOJ151	E. CAPACITOR 6.3V 150P	3	
					C123, 24	ECJ0EB1A104K	C. CAPACITOR CH 10V 0.1U	2	
JK401	K1AB103A0011	CONNECTOR (FEMALE)	1		C200	EEFUEOJ151	E. CAPACITOR 6.3V 150P	1	
					C201	ECJ2FBOJ106K	C. CAPACITOR CH 50V 10U	1	
L401-03	JOJBC0000014	ELECTRICAL FILTER/FILTER	3		C202-04	ECJ0EB1E103K	C. CAPACITOR CH 25V 0.01U	3	
L404, 05	G1C100JA0041	COIL 10UH	2		C205	ECJ2FBOJ106K	C. CAPACITOR CH 50V 10U	1	
					C206, 07	ECJ0EB1E103K	C. CAPACITOR CH 25V 0.01U	2	
Q401	2SB12200RL	TRANSISTOR	1		C208	F1G1A474A018	C. CAPACITOR CH 10V 0.47U	1	
Q402	2SD18210HL	TRANSISTOR	1		C209	ECJ0EB1E103K	C. CAPACITOR CH 25V 0.01U	1	
Q403-06	UNR9213JOL	TRANSISTOR	4		C210	F1G1A474A018	C. CAPACITOR CH 10V 0.47U	1	
Q407	UNR9113JOL	TRANSISTOR	1		C211	ECJ0EB1E103K	C. CAPACITOR CH 25V 0.01U	1	
Q408	UNR9213JOL	TRANSISTOR	1		C212	ECJ2FBOJ106K	C. CAPACITOR CH 50V 10U	1	
					C213	ECJ0EB1E103K	C. CAPACITOR CH 25V 0.01U	1	
R402, 03	ERJ12YJ682	M. RESISTOR CH 1/2W 6.8K	2		C214	ECJ2FBOJ106K	C. CAPACITOR CH 50V 10U	1	
R404	ERJ2GEJ105	M. RESISTOR CH 1/16W 1M	1		C215	ECJ0EB1E103K	C. CAPACITOR CH 25V 0.01U	1	
R405-07	ERJ2RHD104	M. RESISTOR CH 1/16W 100K	3		C216, 17	ECJ0EB1H271K	C. CAPACITOR CH 50V 270P	2	
R408	ERJ2GEJ474	M. RESISTOR CH 1/16W 470K	1		C218	ECJ0EC1H181J	C. CAPACITOR CH 50V 180P	1	
R409, 10	ERJ2RHD273	M. RESISTOR CH 1/16W 27K	2		C219	ECJ0EB1E103K	C. CAPACITOR CH 25V 0.01U	1	
R411	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	1		C220	ECJ0EC1H181J	C. CAPACITOR CH 50V 180P	1	
R413	ERJ2RHD392	M. RESISTOR CH 1/16W 3.9K	1		C221	ECJ0EB1E103K	C. CAPACITOR CH 25V 0.01U	1	
R414	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	1		C224	ECJ2FBOJ106K	C. CAPACITOR CH 50V 10U	1	
R415	ERJ2RHD393	M. RESISTOR CH 1/16W 39K	1		C225-28	ECJ0EB1E103K	C. CAPACITOR CH 25V 0.01U	4	
R416	ERJ2GEJ105	M. RESISTOR CH 1/16W 1M	1		C231-33	ECJ0EB1E103K	C. CAPACITOR CH 25V 0.01U	3	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks	Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
C234, 35	ECJOEC1H181J	C. CAPACITOR CH 50V 180P	2		R131	ERJ2GEJ181	M. RESISTOR CH 1/16W 180	1	
C236	ECJOEB1E103K	C. CAPACITOR CH 25V 0.01U	1		R132	ERJ2GEJ821	M. RESISTOR CH 1/16W 820	1	
C237	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		R133	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1	
C238	EEFUE0J151	E. CAPACITOR 6.3V 150P	1		R134	EXB28V473J	COMBI. R-R	47K	1
C239	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		R135, 36	ERJ2GEJ330	M. RESISTOR CH 1/16W 33	2	
C241	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		R137, 38	ERJ2GEJ181	M. RESISTOR CH 1/16W 180	2	
C243	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		R139, 40	ERJ2GEJ821	M. RESISTOR CH 1/16W 820	2	
C244	ECJ2FBOJ106K	C. CAPACITOR CH 50V 10U	1		R141	ERJ2GEJ330	M. RESISTOR CH 1/16W 33	1	
C245	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		R142	DOYAR0000007	M. RESISTOR CH 1/16W 0	1	
C246	ECJ2FBOJ106K	C. CAPACITOR CH 50V 10U	1		R145	ERJ2GEJ101	M. RESISTOR CH 1/16W 100	1	
C247	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		R146	DOYAR0000007	M. RESISTOR CH 1/16W 0	1	
C300, 01	ECJ2FBOJ106K	C. CAPACITOR CH 50V 10U	2		R147	ERJ3GEYJ220	M. RESISTOR CH 1/16W 22	1	
C302-04	ECJOEB1E103K	C. CAPACITOR CH 25V 0.01U	3		R148-51	DOYAR0000007	M. RESISTOR CH 1/16W 0	4	
C305	ECJ2FBOJ106K	C. CAPACITOR CH 50V 10U	1		R156	ERJ2GEJ472	M. RESISTOR CH 1/16W 4.7K	1	
C306-18	ECJOEB1E103K	C. CAPACITOR CH 25V 0.01U	13		R158	DOYAR0000007	M. RESISTOR CH 1/16W 0	1	
C319	ECJOEC1H070C	C. CAPACITOR CH 50V 7P	1		R200-08	EXB28V330J	COMBI. R-R	33	9
C320	ECJ2FBOJ106K	C. CAPACITOR CH 50V 10U	1		R211	ERJ2GEJ330	M. RESISTOR CH 1/16W 33	1	
C321	ECJOEC1H070C	C. CAPACITOR CH 50V 7P	1		R212	ERJ2GEJ101	M. RESISTOR CH 1/16W 100	1	
C322	ECJOEB1E103K	C. CAPACITOR CH 25V 0.01U	1		R213, 14	ERJ2GEJ330	M. RESISTOR CH 1/16W 33	2	
C324	ECJ2FBOJ106K	C. CAPACITOR CH 50V 10U	1		R216	DOYAR0000007	M. RESISTOR CH 1/16W 0	1	
C325	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		R217	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	1	
C326, 27	ECJ2FBOJ106K	C. CAPACITOR CH 50V 10U	2		R218	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	1	
C328	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		R220, 21	ERJ2GEJ104	M. RESISTOR CH 1/16W 100K	2	
C329	ECJ2FBOJ106K	C. CAPACITOR CH 50V 10U	1		R223	ERJ2GEJ102	M. RESISTOR CH 1/16W 1K	1	
C332	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	1		R225-27	DOYAR0000007	M. RESISTOR CH 1/16W 0	3	
C334	ECJ2FBOJ106K	C. CAPACITOR CH 50V 10U	1		R229	ERJ2GEJ102	M. RESISTOR CH 1/16W 1K	1	
					R231	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	1	
					R234	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	1	
CN100	K1MN16BA0059	CONNECTOR	1		R237-39	DOYAR0000007	M. RESISTOR CH 1/16W 0	3	
CN101	K1MR70B00003	CONNECTOR	1		R240	ERJ2GEJ104	M. RESISTOR CH 1/16W 100K	1	
CN102	K1KA50AA0240	CONNECTOR (MALE)	1		R243, 44	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	2	
CN200	K1NA68E00091	CONNECTOR	1		R246	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	1	
CN201	K1NA68E00090	CONNECTOR	1		R248	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	1	
CN202	K1YYZZ000048	CARD HOLDER A	1		R251	ERJ3GEYG102	M. RESISTOR CH 1/16W 1K	1	
CN203	K1YYZZ000049	CARD HOLDER B	1		R252	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	1	
CN300	K1FY105E0001	CONNECTOR	1		R254	ERJ2GEJ104	M. RESISTOR CH 1/16W 100K	1	
					R255	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	1	
D100-03	LNJ115W88RA	DIODE	4		R256-70	EXB28V750J	COMBI. R-R	75	15
D300, 01	EZJZ0V80010	DIODE	2		R271-73	ERJ2GEJ750	M. RESISTOR CH 1/16W 75	3	
D302	B0KB00000041	DIODE	1		R274, 75	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	2	
					R284, 85	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	2	
FL100, 01	F1H0J1050022	C. CAPACITOR CH6.3V 1U	2		R286-88	ERJ2GEJ750	M. RESISTOR CH 1/16W 75	3	
FL300	F1H0J1050022	C. CAPACITOR CH6.3V 1U	1		R289-03	EXB28V750J	COMBI. R-R	75	15
FL329	F1H0J1050022	C. CAPACITOR CH6.3V 1U	1		R304	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	1	
					R305	ERJ2GEJ104	M. RESISTOR CH 1/16W 100K	1	
IC100	C1ZB00002771	IC	1		R306	ERJ2GEJ332	M. RESISTOR CH 1/16W 3.3K	1	
IC101-03	COEBE0000348	IC	3		R307	ERJ2GEJ223	M. RESISTOR CH 1/16W 22K	1	
IC104	COJBZ002192	IC	1		R308	ERJ2GEJ332	M. RESISTOR CH 1/16W 3.3K	1	
IC105	COJBAA000362	IC	1		R309	ERJ2GEJ223	M. RESISTOR CH 1/16W 22K	1	
IC201	C1DB00001179	IC	1		R310-12	ERJ2GEJ330	M. RESISTOR CH 1/16W 33	3	
IC203, 04	COJBAA000362	IC	2		R313	ERJ3GEYJ220	M. RESISTOR CH 1/16W 22	1	
IC205	C1DB00001181	IC	1		R318-25	ERJ2GEJ330	M. RESISTOR CH 1/16W 33	8	
IC300	COBCAC000061	IC	1		R348-56	EXB28V100J	COMBI. R-R	10	9
IC301	C1DB00001355	IC	1		R357	ERJ2GEJ101	M. RESISTOR CH 1/16W 100	1	
					R358, 59	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	2	
L100-03	JOJHC0000032	ELECTRICAL FILTER/FILTER	4		R361	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1	
L200-03	JOJHC0000032	ELECTRICAL FILTER/FILTER	4		R362	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	1	
L204-06	JOJDC0000102	ELECTRICAL FILTER/FILTER	3		R363	ERJ6ENF2431	M. RESISTOR CH 1/10W 430	1	
L207, 08	JOJHC0000032	ELECTRICAL FILTER/FILTER	2		R364, 65	ERJ6ENF39R2	M. RESISTOR CH 1/10W 39	2	
L300-02	JOJHC0000032	ELECTRICAL FILTER/FILTER	3		R366	ERJ2GEJ152	M. RESISTOR CH 1/16W 1.5K	1	
L303	JOMAB00000220	ELECTRICAL FILTER/FILTER	1		R367	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1	
L304, 05	JOJCC00000059	ELECTRICAL FILTER/FILTER	2		R368	ERJ6ENF2432	M. RESISTOR CH 1/10W 4.3K	1	
L306, 07	JOJHC0000032	ELECTRICAL FILTER/FILTER	2		R369	ERJ2GEJ105	M. RESISTOR CH 1/16W 1M	1	
					R370	DOYAR0000007	M. RESISTOR CH 1/16W 0	1	
Q100	UNR211500L	TRANSISTOR	1		R371	ERJ2GEJ101	M. RESISTOR CH 1/16W 100	1	
Q101, 02	XP0411500L	TRANSISTOR	2		R372	EXB28V103J	COMBI. R-R	10K	1
Q200, 01	B1DHC0000036	TRANSISTOR	2		R373, 74	DOYAR0000007	M. RESISTOR CH 1/16W 0	2	
					R375-86	ERJ2GEJ100X	M. RESISTOR CH 1/16W 10	12	
R100	ERJ2GEJ470	M. RESISTOR CH 1/16W 47	1						
R101-10	EXB28V330J	COMBI. R-R	33	10	X300	HOJ300500024	CRYSTAL OSCILLATOR		1
R111-17	ERJ2GEJ330	M. RESISTOR CH 1/16W 33	7						
R119	ERJ2GEJ330	M. RESISTOR CH 1/16W 33	1		ZA100, 01	K4CD01000017	TERMINAL		2
R121, 22	ERJ2GEJ330	M. RESISTOR CH 1/16W 33	2						
R123	EXB28V330J	COMBI. R-R	33	1					
R124-26	ERJ2GEJ330	M. RESISTOR CH 1/16W 33	3						
R127	ERJ2GEJ101	M. RESISTOR CH 1/16W 100	1						
R128, 29	ERJ2GEJ181	M. RESISTOR CH 1/16W 180	2						
R130	ERJ2GEJ821	M. RESISTOR CH 1/16W 820	1			VMP9173	CARD ANGLE A		1
						VMP9174	CARD ANGLE B		1

Components identified with the mark  have the special characteristics for safety.
When replacing any of these components, use only the same type.

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks	Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
	VMP9175	USB PLATE	1		R1028-31	ERJ3GEYJ223	M. RESISTOR CH 1/16W 22K	4	
	VMZ3784	P2 SLOT PROTECTION SHEET	1		R1032, 33	ERJ3GEYG332	M. RESISTOR CH 1/16W 3.3K	2	
	VMZ3478	CARD SLOT BARRIER B	1		R1034-37	ERJ3GEYG472	M. RESISTOR CH 1/16W 4.7K	4	
	VMZ3630	CARD SLOT BARRIER	1		R1038, 39	ERJ3GEYJ104	M. RESISTOR CH 1/16W 100K	2	
	VEE1F51	USB GND CABLE U	1		R1040, 41	ERJ3GEYG472	M. RESISTOR CH 1/16W 4.7K	2	
	XYN2+J6FJ	SCREW	2		R1042, 43	ERJ3GEYJ183	M. RESISTOR CH 1/16W 18K	2	
					R1044, 45	ERJ3GEYJ242	M. RESISTOR CH 1/16W 2.4K	2	
					R1046, 47	ERJ3GEYJ223	M. RESISTOR CH 1/16W 22K	2	
					R1048, 49	ERJ3GEYG332	M. RESISTOR CH 1/16W 3.3K	2	
					R1050, 51	ERJ3GEYJ181	M. RESISTOR CH 1/16W 180	2	
■ E13	VEP001V6A	SD CARD P.C. BOARD	1	(RTL)	SW1000	KOD113B00029	SWITCH	1	
					SW1001	KOD112B00142	SWITCH	1	
					SW1002	KOH1BA000550	SWITCH	1	
C900	ECJ2FB0J106K	C. CAPACITOR CH 50V 10U	1		SW1003, 04	KOH1BA000338	SWITCH	2	
C901	ECJOEB1C103K	C. CAPACITOR CH 16V 0.01U	1				MISCELLANEOUS		
CN900	K1NA09E00038	CONNECTOR	1						
CN901	K1MN16BA0059	CONNECTOR	1						
D900	LNJ310M6URA	DIODE	1						
■ E14	VEP04940A	HANDLE P. C. BOARD	1	(RTL)					
C1001	ECJ3YB1E106K	C. CAPACITOR CH 25V 10U	1						
C1002, 03	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	2						
C1004, 05	ECJ2FB0J106K	C. CAPACITOR CH 50V 10U	2		■ E15	VEP001X7A	REMOCON F P. C. BOARD	1	(RTL)
C1006	F3G1D106A020	T. CAPACITOR CH 20V 10U	1						
C1007	F3F1A106A046	T. CAPACITOR CH 10V 10U	1						
C1008-11	ECJ1VB1E223K	C. CAPACITOR CH 25V 0.022U	4						
C1012	F3G1D106A020	T. CAPACITOR CH 20V 10U	1		C301	ECJ1VB1C104K	C. CAPACITOR CH 16V 0.1U	1	
C1013	ECJ1VB1H102K	C. CAPACITOR CH 50V 1000P	1		C302, 03	ECJ1VB1A224K	T. CAPACITOR CH 10V 0.22U	2	
C1014	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	1		C304	ECJ1VB1H104K	C. CAPACITOR CH 50V 0.1U	1	
C1016	ECJ1VB1H102K	C. CAPACITOR CH 50V 1000P	1		C305	F3G1C156A028	T. CAPACITOR CH 16V 15U	1	
C1018	F3F1A106A046	T. CAPACITOR CH 10V 10U	1						
C1019	ECJ1VB1E223K	C. CAPACITOR CH 25V 0.022U	1		CN301	K1MN10AA0058	CONNECTOR	1	
C1020, 21	ECUX1A224KBV	C. CAPACITOR CH 10V 0.22U	2						
C1022	ECJ1VB1E223K	C. CAPACITOR CH 25V 0.022U	1		D301	MA3S132D0L	DIODE	1	
C1023	ECJ3YB1E106K	C. CAPACITOR CH 25V 10U	1		D302	B3AAB0000129	LED	1	
C1024	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	1						
C1025, 26	ECJ1VC1H330J	C. CAPACITOR CH 50V 33P	2		Q301	2SD103000L	TRANSISTOR	1	
C1027, 28	ECUV1C823KBV	C. CAPACITOR CH 16V 0.082U	2		Q302	2SD2216J0L	TRANSISTOR	1	
C1029, 30	ECJ1VB1E223K	C. CAPACITOR CH 25V 0.022U	2						
C1031, 32	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	2		R301	ERJ2GEJ225	M. RESISTOR CH 1/16W 2.2M	1	
C1033	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	1		R302	ERJ2GEJ106	M. RESISTOR CH 1/16W 10M	1	
C1034, 35	F1J1A335A003	C. CAPACITOR CH 10V 3.3U	2		R303	ERJ3GEYJ181	M. RESISTOR CH 1/16W 180	1	
C1036	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		R304	ERJ2GEJ334	M. RESISTOR CH 1/16W 330K	1	
C1037	ECJ2FB0J106K	C. CAPACITOR CH 50V 10U	1		R305	ERJ2GEJ470	M. RESISTOR CH 1/16W 47	1	
					R306	ERJ2GEJ182	M. RESISTOR CH 1/16W 1.8K	1	
					R307	ERJ2GEJ472	M. RESISTOR CH 1/16W 4.7K	1	
CN1000	K1MN24BA0059	CONNECTOR	1						
CN1002, 03	K1KA04BA0014	CONNECTOR (MALE)	2		RM301	B3RAB0000073	DIODE	1	
CN1201	K1MN10BA0059	CONNECTOR	1						
					SN301	B3GA00000041	DIODE	1	
D1000, 01	MA3S781D0L	DIODE	2						
IC1000	COABCB000051	IC	1						
IC1001, 02	COABBA000166	IC	2						
L1000-03	G1C100KA0115	COIL 10UH	4		■ E16	VEP01A07A	BATTERY P. C. BOARD	1	(RTL)
Q1000-03	2SD1819A0L	TRANSISTOR	4						
R1006	ERJ3RBD472	M. RESISTOR CH 1/16W 4.7K	1		CN1	K4ZZ04000038	CONNECTOR	1	
R1007, 08	ERJ6GEYG392	M. RESISTOR CH 1/10W 3.9K	2		CN2	K1KA06BA0104	CONNECTOR (MALE)	1	
R1009, 10	ERJ3RBD223	M. RESISTOR CH 1/16W 22K	2						
R1011, 12	ERJ6GEYG392	M. RESISTOR CH 1/10W 3.9K	2		△ F1	K5H402300003	FUSE	1	
R1013	ERJ3RBD472	M. RESISTOR CH 1/16W 4.7K	1						
R1014-17	ERJ3GEYJ273	M. RESISTOR CH 1/16W 27K	4						
R1020	ERJ3GEYJ273	M. RESISTOR CH 1/16W 27K	1						
R1021, 22	ERJ3RBD223	M. RESISTOR CH 1/16W 22K	2						
R1023-25	ERJ3GEYJ273	M. RESISTOR CH 1/16W 27K	3						
R1026, 27	ERJ3RBD223	M. RESISTOR CH 1/16W 22K	2		■ E17	VEP001V9A	MENU P. C. BOARD	1	(RTL)

[illegible]