



Riedel AIO



4-5 RX (in)
7-8 TX (out)

BTR800
3-4 TX (out)
2-5 RX (in)




Adam Port



3-4 RX (in)
2-5 TX (out)

ClearCom CCI
4-5 RX (in)
3-6 TX (out)

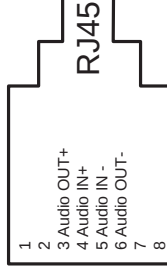


Original Clear-Com IMF 15 pin 4-wire connection

IMF-1 Interface Chassis Matrix Connection DB-15F

pin #	Use
1	NC
2	NC
3	+ Audio Talk (output)
4	+ Audio Listen (input)
5	Call Send Return
6	Ground
7	Interface Sel-0
8	Ground
9	Interface Sel-3
10	NC
11	- Audio Talk (output)
12	Ground
13	Call Send
14	Interface Sel-1
15	Interface Sel-2

ClearCom old CCI DB9
To plug directly into Riedel

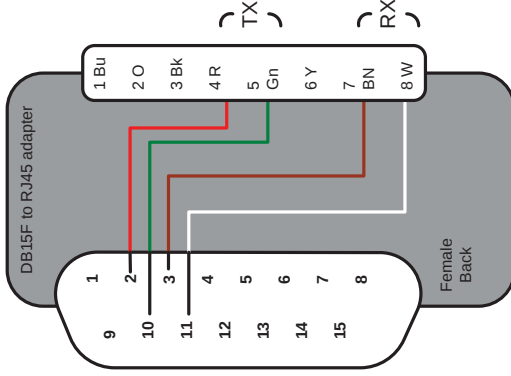

ClearCom old CCI DB9
To pin out like a new CCI22

