

SONY®

COLOR VIDEO CAMERA

BVP-900

BVP-900P

BVP-900WSPK

CAMERA UPGRADE UNIT

BKP-7090

SUPPLEMENT-4

FOR MAINTENANCE MANUAL Volume 2

Some of the pages in the manual for this model have been revised.
Please update the manual in your possession by adding or replacing
the indicated pages with those supplied as part of this supplement.

Applicable Manual (Manual Code)

1st Edition Revised 3 (3-194-738-04)

Contents

Additional information for engineering design changes.

Section 1 Spare Parts

Section 3 Block Diagrams

Section 4 Schematic Diagrams

Section 5 Board Layouts

BVP-900 (J, UC)

BVP-900P (CE)

BVP-900WSPK (CE)

BKP-7090 (SY) J, E

9-967-790-04

Sony Corporation
B&P Company

Printed in Japan

2000. 1 08

© 1999

No.	Part No.	SP Description
201	2-280-511-12	o BRACKET, ADJUSTMENT, ANGLE
202	2-623-773-11	s BOLT (M3X8), STAINLESS
203	3-165-162-01	s SCREW (+P2.6X5) (TYPE1)
204	3-185-871-01	o TAPE, DROP PROTECTION SHIELD
205	3-185-878-01	s WASHER
206	3-185-879-01	o BOSS
207	3-695-847-01	o SCREW, KNOB
208	3-185-888-01	o PLATE, PROTECTION
209	3-185-890-01	s BOLT, SHOULDER
210	3-612-402-01	o HANDLE COVER (C)
211	3-613-317-02	o SHEET, NAME (L) (for UC, J)
	3-613-319-02	o SHEET, NAME (L) (for CE)
212	3-615-750-61	s SHIELD CUSHION (C)
213	3-701-505-00	s SET SCREW, DOUBLE POINT 3X3
214	3-701-510-00	s SET SCREW, DOUBLE POINT 4X4
215	3-740-815-31	o PIPE, HANDLE
216	3-740-817-11	o ESCUTCHEON, PIPE
217	4-367-209-00	s SPRING, COMPRESSION


This exploded view diagram illustrates the assembly of a mechanical component, likely a door handle or latch. The diagram shows the following parts and their assembly sequence:

- Part 316:** A long cylindrical shaft or pin.
- Part 317:** Two small circular end caps or washers for the shaft.
- Part 315:** A small cylindrical pin or bush.
- Part 318:** A small cylindrical pin or bush.
- Part 307:** A small cylindrical pin or bush.
- Part 311:** A small cylindrical pin or bush.
- Part 312:** A long, thin rectangular plate or bracket.
- Part 313:** A large, complex bracket or housing.
- Part 304:** A small rectangular plate or bracket.
- Part 306:** A small rectangular plate or bracket.
- Part 308:** A small rectangular plate or bracket.
- Part 305:** A small cylindrical pin or bush.
- Part 303:** A small rectangular plate or bracket.
- Part 310:** A small rectangular plate or bracket.
- Part 315:** A small cylindrical pin or bush.
- Part 309:** A small cylindrical pin or bush.
- Part 301:** A small cylindrical pin or bush.
- Part 302:** A small cylindrical pin or bush.
- Part 309:** A small cylindrical pin or bush.
- Part 309:** A small cylindrical pin or bush.

The diagram also includes a screw specification: **PWH3 x 6**, indicating the size and type of screw used for assembly.

No.	Part No.	SP Description
301	2-280-511-12	o BRACKET, ADJUSTMENT, ANGLE
302	2-623-773-11	s BOLT (M3X8), STAINLESS
303	3-165-162-01	s SCREW (+P2.6X5) (TYPE1)
304	3-185-871-01	o TAPE, DROP PROTECTION SHIELD
305	3-185-878-01	s WASHER
306	3-185-879-01	o BOSS
307	3-695-847-01	o SCREW, KNOB
308	3-185-888-01	o PLATE, PROTECTION
309	3-185-890-01	s BOLT, SHOULDER
310	3-185-908-01	o CUSHION, PC BOARD RETAINER
311	3-612-402-01	o HANDLE COVER (C)
312	3-613-316-02	o SHEET, NAME (R) (for UC, J)
	3-613-318-02	o SHEET, NAME (R) (for CE)
313	3-615-750-61	s SHIELD CUSHION (C)
314	3-701-505-00	s SET SCREW, DOUBLE POINT 3X3
315	3-701-510-00	s SET SCREW, DOUBLE POINT 4X4
316	3-740-815-31	o PIPE, HANDLE
317	3-740-817-11	o ESCUTCHEON, PIPE
318	4-367-209-00	s SPRING, COMPRESSION

Board Block

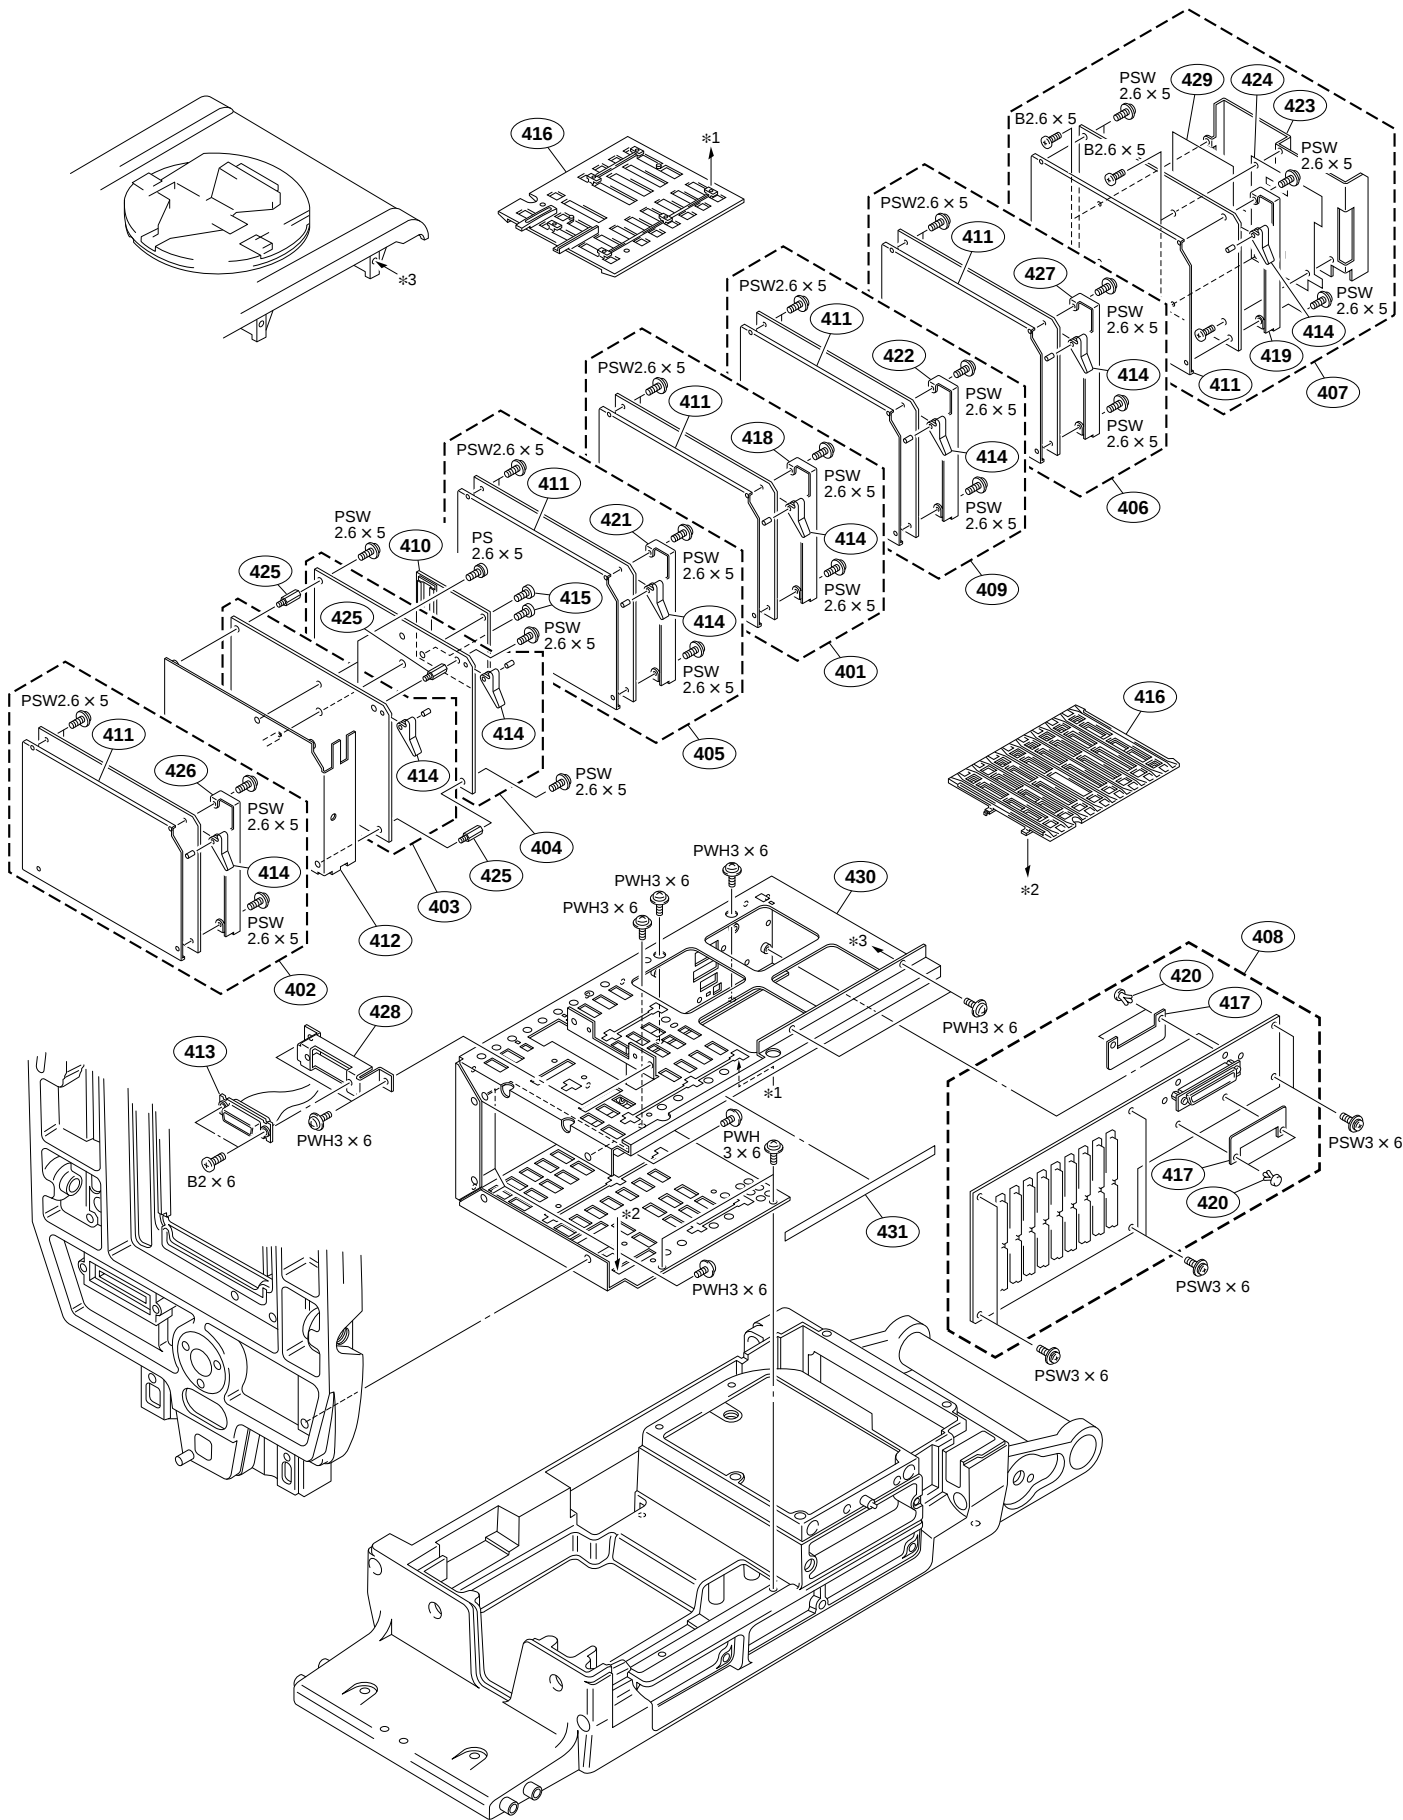

(AD-148 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC304	8-759-655-63	s	IC ADS805U/1K
IC321	8-759-456-26	s	IC 74LCX541MTCX
IC325	8-759-456-26	s	IC 74LCX541MTCX
IC326	8-759-456-26	s	IC 74LCX541MTCX
IC327	8-759-456-26	s	IC 74LCX541MTCX
IC329	8-759-456-26	s	IC 74LCX541MTCX
IC401	8-759-054-61	s	IC CLC505AJE
IC402	8-759-173-16	s	IC TL062CPW
IC404	8-759-655-63	s	IC ADS805U/1K
IC501	8-759-054-61	s	IC CLC505AJE
IC502	8-759-173-16	s	IC TL062CPW
IC504	8-759-655-63	s	IC ADS805U/1K
IC700	8-759-082-53	s	IC TLC274CPW
IC702	8-759-470-51	s	IC MB88141APFV-ER
IC703	8-759-059-50	s	IC MB88351PFV
IC704	8-759-470-51	s	IC MB88141APFV-ER
IC705	8-759-470-51	s	IC MB88141APFV-ER
IC706	8-759-059-50	s	IC MB88351PFV
IC801	8-759-058-62	s	IC TC7S08FU(TE85R)
IC802	8-759-058-54	s	IC TC7S00FU(TE85R)
IC803	8-759-058-62	s	IC TC7S08FU(TE85R)
JW1	1-216-864-11	s	METAL, CHIP 0 5% 1/16W
L1	1-412-026-11	s	INDUCTOR CHIP 1uH
L2	1-412-026-11	s	INDUCTOR CHIP 1uH
L3	1-412-026-11	s	INDUCTOR CHIP 1uH
L4	1-412-026-11	s	INDUCTOR CHIP 1uH
L5	1-412-029-11	s	INDUCTOR CHIP 10uH
L6	1-412-026-11	s	INDUCTOR CHIP 1uH
L7	1-412-026-11	s	INDUCTOR CHIP 1uH
L8	1-412-026-11	s	INDUCTOR CHIP 1uH
L101	1-412-026-11	s	INDUCTOR CHIP 1uH
L102	1-412-026-11	s	INDUCTOR CHIP 1uH
L103	1-412-026-11	s	INDUCTOR CHIP 1uH
L201	1-412-026-11	s	INDUCTOR CHIP 1uH
L202	1-412-026-11	s	INDUCTOR CHIP 1uH
L203	1-412-026-11	s	INDUCTOR CHIP 1uH
L300	1-412-026-11	s	INDUCTOR CHIP 1uH
L400	1-412-026-11	s	INDUCTOR CHIP 1uH
L500	1-412-026-11	s	INDUCTOR CHIP 1uH
L700	1-412-029-11	s	INDUCTOR CHIP 10uH
L701	1-412-029-11	s	INDUCTOR CHIP 10uH
L702	1-412-029-11	s	INDUCTOR CHIP 10uH
L703	1-412-029-11	s	INDUCTOR CHIP 10uH
L704	1-412-029-11	s	INDUCTOR CHIP 10uH
Q1	8-729-230-38	s	TRANSISTOR 2SC4215Y
Q2	8-729-024-56	s	TRANSISTOR 2SA1808
Q3	8-729-026-31	s	TRANSISTOR XP6435
Q4	8-729-040-48	s	TRANSISTOR 2SA1688-4-SONY-TL
Q6	8-729-024-56	s	TRANSISTOR 2SA1808
Q7	8-729-026-31	s	TRANSISTOR XP6435
Q8	8-729-040-48	s	TRANSISTOR 2SA1688-4-SONY-TL
Q9	8-729-821-88	s	TRANSISTOR 2SK1332-3
Q10	8-729-821-88	s	TRANSISTOR 2SK1332-3
Q12	8-729-026-31	s	TRANSISTOR XP6435
Q101	8-729-230-38	s	TRANSISTOR 2SC4215Y
Q102	8-729-024-56	s	TRANSISTOR 2SA1808
Q103	8-729-026-31	s	TRANSISTOR XP6435

(AD-148 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
Q104	8-729-040-48	s	TRANSISTOR 2SA1688-4-SONY-TL
Q106	8-729-024-56	s	TRANSISTOR 2SA1808
Q107	8-729-026-31	s	TRANSISTOR XP6435
Q108	8-729-040-48	s	TRANSISTOR 2SA1688-4-SONY-TL
Q109	8-729-821-88	s	TRANSISTOR 2SK1332-3
Q110	8-729-821-88	s	TRANSISTOR 2SK1332-3
Q112	8-729-026-31	s	TRANSISTOR XP6435
Q201	8-729-230-38	s	TRANSISTOR 2SC4215Y
Q202	8-729-024-56	s	TRANSISTOR 2SA1808
Q203	8-729-026-31	s	TRANSISTOR XP6435
Q204	8-729-040-48	s	TRANSISTOR 2SA1688-4-SONY-TL
Q206	8-729-024-56	s	TRANSISTOR 2SA1808
Q207	8-729-026-31	s	TRANSISTOR XP6435
Q208	8-729-040-48	s	TRANSISTOR 2SA1688-4-SONY-TL
Q209	8-729-821-88	s	TRANSISTOR 2SK1332-3
Q210	8-729-821-88	s	TRANSISTOR 2SK1332-3
Q212	8-729-026-31	s	TRANSISTOR XP6435
Q301	8-729-040-48	s	TRANSISTOR 2SA1688-4-SONY-TL
Q401	8-729-040-48	s	TRANSISTOR 2SA1688-4-SONY-TL
Q501	8-729-040-48	s	TRANSISTOR 2SA1688-4-SONY-TL
Q700	8-729-101-07	s	TRANSISTOR 2SB798
Q701	8-729-101-07	s	TRANSISTOR 2SB798
Q702	8-729-807-51	s	TRANSISTOR 2SD1623-S
Q703	8-729-101-07	s	TRANSISTOR 2SB798
R1	1-218-693-11	s	CHIP, METAL 1.1K 0.50% 1/16W
R2	1-218-710-11	s	CHIP, METAL 5.6K 0.50% 1/16W
R3	1-218-710-11	s	CHIP, METAL 5.6K 0.50% 1/16W
R4	1-218-705-11	s	METAL 3.6K 0.50% 1/16W
R5	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R6	1-218-704-11	s	METAL 3.3K 0.50% 1/16W
R7	1-218-705-11	s	METAL 3.6K 0.50% 1/16W
R8	1-218-722-11	s	CHIP, METAL 18K 0.50% 1/16W
R9	1-218-724-11	s	CHIP, METAL 22K 0.50% 1/16W
R10	1-218-704-11	s	METAL 3.3K 0.50% 1/16W
R11	1-218-716-11	s	METAL 10K 0.50% 1/16W
R12	1-218-668-11	s	CHIP, METAL 100 0.50% 1/16W
R13	1-218-702-11	s	CHIP, METAL 2.7K 0.50% 1/16W
R14	1-218-703-11	s	CHIP, METAL 3K 0.50% 1/16W
R15	1-218-668-11	s	CHIP, METAL 100 0.50% 1/16W
R16	1-218-699-11	s	CHIP, METAL 2K 0.50% 1/16W
R17	1-218-668-11	s	CHIP, METAL 100 0.50% 1/16W
R18	1-218-713-11	s	CHIP, METAL 7.5K 0.50% 1/16W
R19	1-218-668-11	s	CHIP, METAL 100 0.50% 1/16W
R20	1-218-708-11	s	METAL 4.7K 0.50% 1/16W
R21	1-218-714-11	s	METAL 8.2K 0.50% 1/16W
R22	1-218-679-91	s	CHIP, METAL 300 0.50% 1/16W
R23	1-218-700-11	s	METAL 2.2K 0.50% 1/16W
R24	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R25	1-218-668-11	s	CHIP, METAL 100 0.50% 1/16W
R26	1-218-699-11	s	CHIP, METAL 2K 0.50% 1/16W
R27	1-218-724-11	s	CHIP, METAL 22K 0.50% 1/16W
R28	1-218-680-11	s	METAL 330 0.50% 1/16W
R29	1-218-740-11	s	METAL 100K 0.50% 1/16W
R30	1-218-692-11	s	CHIP, METAL 1K 0.50% 1/16W
R31	1-218-744-11	s	METAL 150K 0.50% 1/16W
R32	1-218-724-11	s	CHIP, METAL 22K 0.50% 1/16W
R33	1-218-702-11	s	CHIP, METAL 2.7K 0.50% 1/16W
R34	1-218-716-11	s	METAL 10K 0.50% 1/16W
R35	1-218-668-11	s	CHIP, METAL 100 0.50% 1/16W

(AD-148 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R36	1-218-660-91	s CHIP, METAL 47 0.50% 1/16W
R37	1-218-668-11	s CHIP, METAL 100 0.50% 1/16W
R38	1-218-668-11	s CHIP, METAL 100 0.50% 1/16W
R39	1-218-716-11	s METAL 10K 0.50% 1/16W
R40	1-218-724-11	s CHIP, METAL 22K 0.50% 1/16W
R41	1-216-864-11	s METAL, CHIP 0 5% 1/16W
R42	1-218-680-11	s METAL 330 0.50% 1/16W
R43	1-218-728-11	s METAL 33K 0.50% 1/16W
R44	1-218-723-11	s METAL 20K 0.50% 1/16W
R45	1-218-716-11	s METAL 10K 0.50% 1/16W
R46	1-218-702-11	s CHIP, METAL 2.7K 0.50% 1/16W
R47	1-218-680-11	s METAL 330 0.50% 1/16W
R48	1-218-716-11	s METAL 10K 0.50% 1/16W
R49	1-218-702-11	s CHIP, METAL 2.7K 0.50% 1/16W
R50	1-218-702-11	s CHIP, METAL 2.7K 0.50% 1/16W
R51	1-218-714-11	s METAL 8.2K 0.50% 1/16W
R52	1-218-716-11	s METAL 10K 0.50% 1/16W
R53	1-218-712-11	s CHIP, METAL 6.8K 0.50% 1/16W
R54	1-218-724-11	s CHIP, METAL 22K 0.50% 1/16W
R55	1-218-724-11	s CHIP, METAL 22K 0.50% 1/16W
R56	1-218-732-11	s METAL 47K 0.50% 1/16W
R57	1-218-699-11	s CHIP, METAL 2K 0.50% 1/16W
R58	1-218-668-11	s CHIP, METAL 100 0.50% 1/16W
R59	1-218-724-11	s CHIP, METAL 22K 0.50% 1/16W
R60	1-218-729-11	s CHIP, METAL 36K 0.50% 1/16W
R61	1-218-720-11	s METAL 15K 0.50% 1/16W
R62	1-218-740-11	s METAL 100K 0.50% 1/16W
R65	1-216-851-11	s METAL, CHIP 330K 5% 1/16W
R68	1-218-720-11	s METAL 15K 0.50% 1/16W
R70	1-218-707-11	s CHIP, METAL 4.3K 0.50% 1/16W
R73	1-218-692-11	s CHIP, METAL 1K 0.50% 1/16W
R74	1-218-692-11	s CHIP, METAL 1K 0.50% 1/16W
R75	1-216-851-11	s METAL, CHIP 330K 5% 1/16W
R76	1-218-692-11	s CHIP, METAL 1K 0.50% 1/16W
R77	1-218-692-11	s CHIP, METAL 1K 0.50% 1/16W
R78	1-218-711-11	s METAL 6.2K 0.50% 1/16W
R79	1-218-702-11	s CHIP, METAL 2.7K 0.50% 1/16W
R80	1-218-704-11	s METAL 3.3K 0.50% 1/16W
R101	1-218-693-11	s CHIP, METAL 1.1K 0.50% 1/16W
R102	1-218-710-11	s CHIP, METAL 5.6K 0.50% 1/16W
R103	1-218-710-11	s CHIP, METAL 5.6K 0.50% 1/16W
R104	1-218-705-11	s METAL 3.6K 0.50% 1/16W
R106	1-218-704-11	s METAL 3.3K 0.50% 1/16W
R107	1-218-705-11	s METAL 3.6K 0.50% 1/16W
R108	1-218-722-11	s CHIP, METAL 18K 0.50% 1/16W
R109	1-218-724-11	s CHIP, METAL 22K 0.50% 1/16W
R110	1-218-704-11	s METAL 3.3K 0.50% 1/16W
R111	1-218-716-11	s METAL 10K 0.50% 1/16W
R112	1-218-702-11	s CHIP, METAL 2.7K 0.50% 1/16W
R113	1-218-703-11	s CHIP, METAL 3K 0.50% 1/16W
R115	1-218-699-11	s CHIP, METAL 2K 0.50% 1/16W
R116	1-218-668-11	s CHIP, METAL 100 0.50% 1/16W
R117	1-218-713-11	s CHIP, METAL 7.5K 0.50% 1/16W
R118	1-218-668-11	s CHIP, METAL 100 0.50% 1/16W
R119	1-218-708-11	s METAL 4.7K 0.50% 1/16W
R120	1-218-714-11	s METAL 8.2K 0.50% 1/16W
R121	1-218-679-91	s CHIP, METAL 300 0.50% 1/16W
R122	1-218-700-11	s METAL 2.2K 0.50% 1/16W
R123	1-218-692-11	s CHIP, METAL 1K 0.50% 1/16W

(AD-148 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R125	1-218-699-11	s CHIP, METAL 2K 0.50% 1/16W
R126	1-218-724-11	s CHIP, METAL 22K 0.50% 1/16W
R127	1-218-680-11	s METAL 330 0.50% 1/16W
R130	1-218-744-11	s METAL 150K 0.50% 1/16W
R131	1-218-724-11	s CHIP, METAL 22K 0.50% 1/16W
R132	1-218-702-11	s CHIP, METAL 2.7K 0.50% 1/16W
R134	1-218-668-11	s CHIP, METAL 100 0.50% 1/16W
R135	1-218-660-91	s CHIP, METAL 47 0.50% 1/16W
R136	1-218-668-11	s CHIP, METAL 100 0.50% 1/16W
R137	1-218-668-11	s CHIP, METAL 100 0.50% 1/16W
R138	1-218-716-11	s METAL 10K 0.50% 1/16W
R139	1-218-724-11	s CHIP, METAL 22K 0.50% 1/16W
R140	1-216-864-11	s METAL, CHIP 0 5% 1/16W
R141	1-218-680-11	s METAL 330 0.50% 1/16W
R142	1-218-728-11	s METAL 33K 0.50% 1/16W
R144	1-218-716-11	s METAL 10K 0.50% 1/16W
R145	1-218-702-11	s CHIP, METAL 2.7K 0.50% 1/16W
R146	1-218-702-11	s CHIP, METAL 2.7K 0.50% 1/16W
R147	1-218-680-11	s METAL 330 0.50% 1/16W
R148	1-218-716-11	s METAL 10K 0.50% 1/16W
R149	1-218-702-11	s CHIP, METAL 2.7K 0.50% 1/16W
R150	1-218-714-11	s METAL 8.2K 0.50% 1/16W
R151	1-218-716-11	s METAL 10K 0.50% 1/16W
R152	1-218-712-11	s CHIP, METAL 6.8K 0.50% 1/16W
R153	1-218-724-11	s CHIP, METAL 22K 0.50% 1/16W
R155	1-218-732-11	s METAL 47K 0.50% 1/16W
R156	1-218-699-11	s CHIP, METAL 2K 0.50% 1/16W
R157	1-218-668-11	s CHIP, METAL 100 0.50% 1/16W
R164	1-216-851-11	s METAL, CHIP 330K 5% 1/16W
R167	1-218-720-11	s METAL 15K 0.50% 1/16W
R169	1-218-707-11	s CHIP, METAL 4.3K 0.50% 1/16W
R172	1-218-692-11	s CHIP, METAL 1K 0.50% 1/16W
R173	1-218-692-11	s CHIP, METAL 1K 0.50% 1/16W
R174	1-216-851-11	s METAL, CHIP 330K 5% 1/16W
R175	1-218-692-11	s CHIP, METAL 1K 0.50% 1/16W
R176	1-218-692-11	s CHIP, METAL 1K 0.50% 1/16W
R177	1-218-711-11	s METAL 6.2K 0.50% 1/16W
R179	1-218-702-11	s CHIP, METAL 2.7K 0.50% 1/16W
R180	1-218-704-11	s METAL 3.3K 0.50% 1/16W
R201	1-218-693-11	s CHIP, METAL 1.1K 0.50% 1/16W
R202	1-218-710-11	s CHIP, METAL 5.6K 0.50% 1/16W
R203	1-218-710-11	s CHIP, METAL 5.6K 0.50% 1/16W
R204	1-218-705-11	s METAL 3.6K 0.50% 1/16W
R206	1-218-704-11	s METAL 3.3K 0.50% 1/16W
R207	1-218-705-11	s METAL 3.6K 0.50% 1/16W
R208	1-218-722-11	s CHIP, METAL 18K 0.50% 1/16W
R209	1-218-724-11	s CHIP, METAL 22K 0.50% 1/16W
R210	1-218-704-11	s METAL 3.3K 0.50% 1/16W
R211	1-218-716-11	s METAL 10K 0.50% 1/16W
R212	1-218-702-11	s CHIP, METAL 2.7K 0.50% 1/16W
R213	1-218-703-11	s CHIP, METAL 3K 0.50% 1/16W
R215	1-218-699-11	s CHIP, METAL 2K 0.50% 1/16W
R216	1-218-668-11	s CHIP, METAL 100 0.50% 1/16W
R217	1-218-713-11	s CHIP, METAL 7.5K 0.50% 1/16W
R218	1-218-668-11	s CHIP, METAL 100 0.50% 1/16W
R219	1-218-708-11	s METAL 4.7K 0.50% 1/16W
R220	1-218-714-11	s METAL 8.2K 0.50% 1/16W
R221	1-218-679-91	s CHIP, METAL 300 0.50% 1/16W
R222	1-218-700-11	s METAL 2.2K 0.50% 1/16W

(AT-120 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C53	1-164-156-11	s	CERAMIC, CHIP 0.1uF 25V
C54	1-164-156-11	s	CERAMIC, CHIP 0.1uF 25V
C55	1-164-156-11	s	CERAMIC, CHIP 0.1uF 25V
C56	1-164-156-11	s	CERAMIC, CHIP 0.1uF 25V
C57	1-164-156-11	s	CERAMIC, CHIP 0.1uF 25V
C58	1-164-156-11	s	CERAMIC, CHIP 0.1uF 25V
C59	1-164-156-11	s	CERAMIC, CHIP 0.1uF 25V
C60	1-164-156-11	s	CERAMIC, CHIP 0.1uF 25V
C61	1-164-156-11	s	CERAMIC, CHIP 0.1uF 25V
C62	1-164-156-11	s	CERAMIC, CHIP 0.1uF 25V
C63	1-164-156-11	s	CERAMIC, CHIP 0.1uF 25V
C65	1-164-156-11	s	CERAMIC, CHIP 0.1uF 25V
C67	1-104-851-11	s	TANTALUM, CHIP 10uF 20% 10V
C68	1-104-851-11	s	TANTALUM, CHIP 10uF 20% 10V
C69	1-104-851-11	s	TANTALUM, CHIP 10uF 20% 10V
C70	1-104-851-11	s	TANTALUM, CHIP 10uF 20% 10V
C71	1-104-851-11	s	TANTALUM, CHIP 10uF 20% 10V
C72	1-164-156-11	s	CERAMIC, CHIP 0.1uF 25V
C73	1-164-156-11	s	CERAMIC, CHIP 0.1uF 25V
C74	1-164-156-11	s	CERAMIC, CHIP 0.1uF 25V
C75	1-164-156-11	s	CERAMIC, CHIP 0.1uF 25V
C76	1-164-156-11	s	CERAMIC, CHIP 0.1uF 25V
C77	1-164-156-11	s	CERAMIC, CHIP 0.1uF 25V
C78	1-164-156-11	s	CERAMIC, CHIP 0.1uF 25V
C79	1-164-156-11	s	CERAMIC, CHIP 0.1uF 25V
C80	1-164-156-11	s	CERAMIC, CHIP 0.1uF 25V
C81	1-164-156-11	s	CERAMIC, CHIP 0.1uF 25V
C82	1-164-156-11	s	CERAMIC, CHIP 0.1uF 25V
C83	1-104-851-11	s	TANTALUM, CHIP 10uF 20% 10V
C84	1-135-177-21	s	TANTALUM, CHIP 1uF 10% 25V
C85	1-113-642-11	s	TANTALUM, CHIP 47uF 20% 10V
C86	1-164-217-11	s	CERAMIC, CHIP 150PF 5% 50V
C87	1-164-156-11	s	CERAMIC, CHIP 0.1uF 25V
C88	1-164-156-11	s	CERAMIC, CHIP 0.1uF 25V
C90	1-164-217-11	s	CERAMIC, CHIP 150PF 5% 50V
C91	1-164-217-11	s	CERAMIC, CHIP 150PF 5% 50V
C92	1-162-964-11	s	CERAMIC, CHIP 0.001uF 10% 50V
C93	1-164-217-11	s	CERAMIC, CHIP 150PF 5% 50V
C94	1-164-217-11	s	CERAMIC, CHIP 150PF 5% 50V
C95	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C96	1-135-177-21	s	TANTALUM, CHIP 1uF 10% 25V
C97	1-135-177-21	s	TANTALUM, CHIP 1uF 10% 25V
C98	1-164-217-11	s	CERAMIC, CHIP 150PF 5% 50V
C99	1-162-921-11	s	CERAMIC, CHIP 33PF 5% 50V
C100	1-135-177-21	s	TANTALUM, CHIP 1uF 10% 25V
C101	1-164-217-11	s	CERAMIC, CHIP 150PF 5% 50V
C102	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C103	1-162-964-11	s	CERAMIC, CHIP 0.001uF 10% 50V
C104	1-135-176-21	s	TANTALUM, CHIP 0.68uF 20% 35V
C105	1-164-156-11	s	CERAMIC, CHIP 0.1uF 25V
C106	1-164-156-11	s	CERAMIC, CHIP 0.1uF 25V
C107	1-164-156-11	s	CERAMIC, CHIP 0.1uF 25V
C108	1-164-156-11	s	CERAMIC, CHIP 0.1uF 25V
C109	1-164-156-11	s	CERAMIC, CHIP 0.1uF 25V
C110	1-162-964-11	s	CERAMIC, CHIP 0.001uF 10% 50V
C111	1-162-919-11	s	CERAMIC, CHIP 22PF 5% 50V
C112	1-162-919-11	s	CERAMIC, CHIP 22PF 5% 50V
C113	1-162-919-11	s	CERAMIC, CHIP 22PF 5% 50V
C114	1-162-919-11	s	CERAMIC, CHIP 22PF 5% 50V

(AT-120 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C115	1-162-919-11	s	CERAMIC, CHIP 22PF 5% 50V
C116	1-162-919-11	s	CERAMIC, CHIP 22PF 5% 50V
C117	1-162-919-11	s	CERAMIC, CHIP 22PF 5% 50V
C118	1-162-919-11	s	CERAMIC, CHIP 22PF 5% 50V
C119	1-162-919-11	s	CERAMIC, CHIP 22PF 5% 50V
C120	1-162-919-11	s	CERAMIC, CHIP 22PF 5% 50V
C121	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C122	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C123	1-104-851-11	s	TANTALUM, CHIP 10uF 20% 10V
CNI8	1-251-350-11	o	SOCKET, IC (PLCC) 32P
CNI9	1-251-350-11	o	SOCKET, IC (PLCC) 32P
D1	8-719-041-68	s	DIODE RD3.3UH-T1
D2	8-719-041-68	s	DIODE RD3.3UH-T1
D3	8-759-185-42	s	IC LM4040AIM3-2.5
D4	8-719-041-68	s	DIODE RD3.3UH-T1
D5	8-719-059-59	s	DIODE MA3J74200LSO
D6	8-719-404-35	s	DIODE MA141WK
D7	8-719-404-35	s	DIODE MA141WK
D8	8-719-059-59	s	DIODE MA3J74200LSO
D9	8-719-059-59	s	DIODE MA3J74200LSO
D10	8-719-059-59	s	DIODE MA3J74200LSO
D11	8-719-059-59	s	DIODE MA3J74200LSO
D12	8-719-059-59	s	DIODE MA3J74200LSO
D13	8-719-059-59	s	DIODE MA3J74200LSO
D14	8-719-059-59	s	DIODE MA3J74200LSO
D15	8-719-059-59	s	DIODE MA3J74200LSO
D16	8-719-059-59	s	DIODE MA3J74200LSO
D17	8-719-059-59	s	DIODE MA3J74200LSO
D18	8-719-404-35	s	DIODE MA141WK
D19	8-719-404-35	s	DIODE MA141WK
D20	8-719-404-35	s	DIODE MA141WK
D21	8-719-404-35	s	DIODE MA141WK
D22	8-719-404-35	s	DIODE MA141WK
D23	8-719-404-35	s	DIODE MA141WK
D24	8-719-404-35	s	DIODE MA141WK
IC1	8-759-082-53	s	IC TLC274CPW
IC2	8-759-173-16	s	IC TL062CPW
IC3	8-759-076-06	s	IC TL064CPW
IC4	8-759-076-06	s	IC TL064CPW
IC5	8-759-523-02	s	IC TC74HC4053AFT(EL)
IC6	8-759-487-51	s	IC HN58C257AT-10
IC7	8-759-399-56	s	IC STK12C68-S45
IC8	8-759-662-01	o	IC 29F040-BVP900H-V1.22
IC9	8-759-662-02	o	IC 29F040-BVP900L-V1.22
IC10	8-759-533-95	s	IC UPD6466GS-515
IC11	8-759-389-33	s	IC 74LCX244MTCX
IC12	8-759-082-55	s	IC TC7W00FU
IC13	8-759-337-74	s	IC HM62V256LT8Z
IC14	8-759-337-74	s	IC HM62V256LT8Z
IC15	8-759-524-18	s	IC TC74VHC163FT(EL)
IC16	8-759-524-18	s	IC TC74VHC163FT(EL)
IC17	8-759-524-18	s	IC TC74VHC163FT(EL)
IC18	8-759-182-95	s	IC HD151015T
IC19	8-759-182-95	s	IC HD151015T
IC20	8-759-996-82	s	IC MSM82C55A-2GS
IC21	8-759-487-32	s	IC HD6417032VF12
IC22	8-759-996-82	s	IC MSM82C55A-2GS
IC23	8-759-491-48	s	IC TC74VHCT138AFT(EL)

(AT-120 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC24	8-759-389-25	s	IC 74LCX02MTCX
IC25	8-759-654-94	s	IC MSM82C51A-2GS-KR1
IC26	8-759-277-99	s	IC CXD8889R
IC27	8-759-058-54	s	IC TC7S00FU(TE85R)
IC28	8-759-491-50	s	IC TC74VHCT244AFT(EL)
IC29	8-759-654-94	s	IC MSM82C51A-2GS-KR1
IC30	8-759-277-99	s	IC CXD8889R
IC31	8-759-083-94	s	IC TC7W74FU
IC32	8-759-285-09	s	IC CXD8892Q
IC33	8-759-092-81	s	IC SN75158PS
IC34	8-759-050-06	s	IC SN74HC157APW
IC35	8-759-082-58	s	IC TC7W08FU
IC36	8-759-059-50	s	IC MB88351PFV
IC37	8-759-049-56	s	IC SN74HC02APW-E05
IC38	8-759-389-33	s	IC 74LCX244MTCX
IC39	8-759-521-15	s	IC MAX232CWE
IC41	8-759-369-92	s	IC M51958AFP600D
JC1	1-216-864-11	s	METAL, CHIP 0 5% 1/16W
JC4	1-216-864-11	s	METAL, CHIP 0 5% 1/16W
L1	1-412-029-11	s	INDUCTOR, CHIP 10uH
L2	1-412-029-11	s	INDUCTOR, CHIP 10uH
L3	1-412-029-11	s	INDUCTOR, CHIP 10uH
L4	1-412-029-11	s	INDUCTOR, CHIP 10uH
L5	1-412-029-11	s	INDUCTOR, CHIP 10uH
L6	1-412-029-11	s	INDUCTOR, CHIP 10uH
L7	1-412-029-11	s	INDUCTOR, CHIP 10uH
L8	1-412-029-11	s	INDUCTOR, CHIP 10uH
L9	1-412-029-11	s	INDUCTOR, CHIP 10uH
L10	1-410-388-31	s	INDUCTOR, CHIP 39uH
L11	1-412-032-11	s	INDUCTOR, CHIP 100uH
PH1	8-749-014-35	s	IC HCPL-0630-500
Q1	8-729-101-07	s	TRANSISTOR 2SB798
Q2	8-729-807-51	s	TRANSISTOR 2SD1623-S
Q3	8-729-101-07	s	TRANSISTOR 2SB798
Q4	8-729-920-48	s	TRANSISTOR IMH2
Q5	8-729-924-39	s	TRANSISTOR DTC143XU
Q6	8-729-920-48	s	TRANSISTOR IMH2
Q7	8-729-920-48	s	TRANSISTOR IMH2
Q8	8-729-920-48	s	TRANSISTOR IMH2
Q9	8-729-028-88	s	TRANSISTOR DTA143XUA-T106
Q10	8-729-402-19	s	TRANSISTOR XN6501
Q11	8-729-920-48	s	TRANSISTOR IMH2
R1	1-218-716-11	s	METAL, CHIP 10K 0.50% 1/16W
R2	1-218-716-11	s	METAL, CHIP 10K 0.50% 1/16W
R3	1-218-716-11	s	METAL, CHIP 10K 0.50% 1/16W
R4	1-218-723-11	s	METAL, CHIP 20K 0.50% 1/16W
R5	1-218-718-11	s	METAL, CHIP 12K 0.50% 1/16W
R6	1-218-716-11	s	METAL, CHIP 10K 0.50% 1/16W
R7	1-218-692-11	s	METAL, CHIP 1K 0.50% 1/16W
R8	1-218-723-11	s	METAL, CHIP 20K 0.50% 1/16W
R9	1-218-716-11	s	METAL, CHIP 10K 0.50% 1/16W
R10	1-218-737-11	s	METAL, CHIP 75K 0.50% 1/16W
R11	1-218-881-11	s	METAL, CHIP 27K 0.50% 1/16W
R12	1-218-723-11	s	METAL, CHIP 20K 0.50% 1/16W
R13	1-218-718-11	s	METAL, CHIP 12K 0.50% 1/16W
R14	1-218-692-11	s	METAL, CHIP 1K 0.50% 1/16W

(AT-120 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R15	1-218-723-11	s	METAL, CHIP 20K 0.50% 1/16W
R16	1-218-718-11	s	METAL, CHIP 12K 0.50% 1/16W
R17	1-218-708-11	s	METAL, CHIP 4.7K 0.50% 1/16W
R18	1-218-728-11	s	METAL, CHIP 33K 0.50% 1/16W
R19	1-218-736-11	s	METAL, CHIP 68K 0.50% 1/16W
R20	1-218-692-11	s	METAL, CHIP 1K 0.50% 1/16W
R21	1-218-728-11	s	METAL, CHIP 33K 0.50% 1/16W
R22	1-218-736-11	s	METAL, CHIP 68K 0.50% 1/16W
R23	1-218-692-11	s	METAL, CHIP 1K 0.50% 1/16W
R24	1-218-728-11	s	METAL, CHIP 33K 0.50% 1/16W
R25	1-218-736-11	s	METAL, CHIP 68K 0.50% 1/16W
R26	1-218-692-11	s	METAL, CHIP 1K 0.50% 1/16W
R27	1-218-701-11	s	METAL, CHIP 2.4K 0.50% 1/16W
R28	1-218-710-11	s	METAL, CHIP 5.6K 0.50% 1/16W
R29	1-218-710-11	s	METAL, CHIP 5.6K 0.50% 1/16W
R30	1-218-692-11	s	METAL, CHIP 1K 0.50% 1/16W
R31	1-218-716-11	s	METAL, CHIP 10K 0.50% 1/16W
R32	1-218-716-11	s	METAL, CHIP 10K 0.50% 1/16W
R33	1-218-730-11	s	METAL, CHIP 39K 0.50% 1/16W
R34	1-218-746-11	s	METAL, CHIP 180K 0.50% 1/16W
R35	1-218-716-11	s	METAL, CHIP 10K 0.50% 1/16W
R36	1-218-692-11	s	METAL, CHIP 1K 0.50% 1/16W
R37	1-218-716-11	s	METAL, CHIP 10K 0.50% 1/16W
R38	1-218-716-11	s	METAL, CHIP 10K 0.50% 1/16W
R39	1-218-730-11	s	METAL, CHIP 39K 0.50% 1/16W
R40	1-218-746-11	s	METAL, CHIP 180K 0.50% 1/16W
R41	1-218-716-11	s	METAL, CHIP 10K 0.50% 1/16W
R42	1-218-692-11	s	METAL, CHIP 1K 0.50% 1/16W
R43	1-218-692-11	s	METAL, CHIP 1K 0.50% 1/16W
R44	1-218-716-11	s	METAL, CHIP 10K 0.50% 1/16W
R45	1-218-716-11	s	METAL, CHIP 10K 0.50% 1/16W
R46	1-218-692-11	s	METAL, CHIP 1K 0.50% 1/16W
R47	1-218-690-11	s	METAL, CHIP 820 0.50% 1/16W
R48	1-218-722-11	s	METAL, CHIP 18K 0.50% 1/16W
R49	1-216-855-11	s	METAL, CHIP 680K 5% 1/16W
R50	1-218-692-11	s	METAL, CHIP 1K 0.50% 1/16W
R51	1-218-716-11	s	METAL, CHIP 10K 0.50% 1/16W
R52	1-218-716-11	s	METAL, CHIP 10K 0.50% 1/16W
R53	1-218-716-11	s	METAL, CHIP 10K 0.50% 1/16W
R54	1-218-716-11	s	METAL, CHIP 10K 0.50% 1/16W
R55	1-218-668-11	s	METAL, CHIP 100 0.50% 1/16W
R56	1-218-692-11	s	METAL, CHIP 1K 0.50% 1/16W
R57	1-218-740-11	s	METAL, CHIP 100K 0.50% 1/16W
R58	1-218-692-11	s	METAL, CHIP 1K 0.50% 1/16W
R59	1-218-692-11	s	METAL, CHIP 1K 0.50% 1/16W
R60	1-218-692-11	s	METAL, CHIP 1K 0.50% 1/16W
R61	1-218-740-11	s	METAL, CHIP 100K 0.50% 1/16W
R62	1-218-740-11	s	METAL, CHIP 100K 0.50% 1/16W
R63	1-218-740-11	s	METAL, CHIP 100K 0.50% 1/16W
R64	1-218-740-11	s	METAL, CHIP 100K 0.50% 1/16W
R65	1-218-740-11	s	METAL, CHIP 100K 0.50% 1/16W
R66	1-218-740-11	s	METAL, CHIP 100K 0.50% 1/16W
R67	1-216-862-11	s	METAL, CHIP 2.7M 5% 1/16W
R68	1-218-716-11	s	METAL, CHIP 10K 0.50% 1/16W
R69	1-218-712-11	s	METAL, CHIP 6.8K 0.50% 1/16W
R70	1-218-712-11	s	METAL, CHIP 6.8K 0.50% 1/16W
R71	1-218-708-11	s	METAL, CHIP 4.7K 0.50% 1/16W
R72	1-218-716-11	s	METAL, CHIP 10K 0.50% 1/16W
R73	1-218-724-11	s	METAL, CHIP 22K 5% 1/16W

(MS-57A/57B/57P BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C861	1-164-156-11	s	CERAMIC, CHIP 0.1uF 25V
C862	1-104-851-11	s	TANTALUM, CHIP 10uF 20% 10V
C863	1-104-852-11	s	TANTALUM, CHIP 22uF 20% 10V
C864	1-104-851-11	s	TANTALUM, CHIP 10uF 20% 10V
C865	1-164-156-11	s	CERAMIC, CHIP 0.1uF 25V
C866	1-164-156-11	s	CERAMIC, CHIP 0.1uF 25V
C867	1-104-852-11	s	TANTALUM, CHIP 22uF 20% 10V
C868	1-164-156-11	s	CERAMIC, CHIP 0.1uF 25V
C869	1-164-739-11	s	CERAMIC, CHIP 560PF 5% 50V
C870	1-104-852-11	s	TANTALUM, CHIP 22uF 20% 10V
C872	1-104-752-11	s	TANTALUM, CHIP 33uF 20% 6.3V
C874	1-104-851-11	s	TANTALUM, CHIP 10uF 20% 10V
C875	1-104-851-11	s	TANTALUM, CHIP 10uF 20% 10V
C876	1-162-917-11	s	CERAMIC, CHIP 15PF 5% 50V
C877	1-162-923-11	s	CERAMIC, CHIP 47PF 5% 50V
C878	1-162-923-11	s	CERAMIC, CHIP 47PF 5% 50V
C879	1-162-923-11	s	CERAMIC, CHIP 47PF 5% 50V
C880	1-162-917-11	s	CERAMIC, CHIP 15PF 5% 50V
C881	1-162-923-11	s	CERAMIC, CHIP 47PF 5% 50V
C882	1-162-917-11	s	CERAMIC, CHIP 15PF 5% 50V
C883	1-162-923-11	s	CERAMIC, CHIP 47PF 5% 50V
C884	1-162-923-11	s	CERAMIC, CHIP 47PF 5% 50V
C885	1-164-505-11	s	CERAMIC, CHIP 2.2uF 16V
C886	1-164-505-11	s	CERAMIC, CHIP 2.2uF 16V
C887	1-164-505-11	s	CERAMIC, CHIP 2.2uF 16V
C888	1-104-851-11	s	TANTALUM, CHIP 10uF 20% 10V
C889	1-104-851-11	s	TANTALUM, CHIP 10uF 20% 10V
C890	1-104-851-11	s	TANTALUM, CHIP 10uF 20% 10V
C891	1-164-156-11	s	CERAMIC, CHIP 0.1uF 25V
C892	1-164-156-11	s	CERAMIC, CHIP 0.1uF 25V
C893	1-104-852-11	s	TANTALUM, CHIP 22uF 20% 10V
C894	1-164-156-11	s	CERAMIC, CHIP 0.1uF 25V
C895	1-135-180-21	s	TANTALUM, CHIP 33uF 10% 10V
C896	1-164-156-11	s	CERAMIC, CHIP 0.1uF 25V
C897	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
C898	1-104-852-11	s	TANTALUM, CHIP 22uF 20% 10V
C899	1-135-210-11	s	TANTALUM, CHIP 4.7uF 20% 10V
C900	1-164-156-11	s	CERAMIC, CHIP 0.1uF 25V
C901	1-135-210-11	s	TANTALUM, CHIP 4.7uF 20% 10V
C902	1-164-156-11	s	CERAMIC, CHIP 0.1uF 25V
C903	1-104-852-11	s	TANTALUM, CHIP 22uF 20% 10V
C904	1-162-916-11	s	CERAMIC, CHIP 12PF 5% 50V
C905	1-162-912-11	s	CERAMIC, CHIP 7PF 50V
C906	1-162-912-11	s	CERAMIC, CHIP 7PF 50V
C907	1-162-923-11	s	CERAMIC, CHIP 47PF 5% 50V
C908	1-162-919-11	s	CERAMIC, CHIP 22PF 5% 50V
C909	1-162-919-11	s	CERAMIC, CHIP 22PF 5% 50V
C910	1-162-923-11	s	CERAMIC, CHIP 47PF 5% 50V
C911	1-162-919-11	s	CERAMIC, CHIP 22PF 5% 50V
C912	1-162-919-11	s	CERAMIC, CHIP 22PF 5% 50V
C913	1-104-852-11	s	TANTALUM, CHIP 22uF 20% 10V
C914	1-104-913-11	s	TANTALUM, CHIP 10uF 20% 16V
C915	1-164-505-11	s	CERAMIC, CHIP 2.2uF 16V
C916	1-164-505-11	s	CERAMIC, CHIP 2.2uF 16V
C917	1-164-505-11	s	CERAMIC, CHIP 2.2uF 16V
C918	1-164-505-11	s	CERAMIC, CHIP 2.2uF 16V
C919	1-164-505-11	s	CERAMIC, CHIP 2.2uF 16V
C920	1-164-505-11	s	CERAMIC, CHIP 2.2uF 16V
C921	1-104-851-11	s	TANTALUM, CHIP 10uF 20% 10V

(MS-57A/57B/57P BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C922	1-104-752-11	s	TANTALUM, CHIP 33uF 20% 6.3V
C923	1-164-739-11	s	CERAMIC, CHIP 560PF 5% 50V
C924	1-104-851-11	s	TANTALUM, CHIP 10uF 20% 10V
C925	1-135-179-21	s	TANTALUM, CHIP 2.2uF 10% 16V
C926	1-104-852-11	s	TANTALUM, CHIP 22uF 20% 10V
C927	1-104-851-11	s	TANTALUM, CHIP 10uF 20% 10V
C928	1-162-928-11	s	CERAMIC, CHIP 120PF 5% 50V
C929	1-162-928-11	s	CERAMIC, CHIP 120PF 5% 50V
C930	1-164-156-11	s	CERAMIC, CHIP 0.1uF 25V
C931	1-162-915-11	s	CERAMIC, CHIP 10PF 50V
C932	1-104-847-11	s	TANTALUM, CHIP 22uF 20% 4V
C933	1-104-851-11	s	TANTALUM, CHIP 10uF 20% 10V
C935	1-162-928-11	s	CERAMIC, CHIP 120PF 5% 50V
C936	1-104-852-11	s	TANTALUM, CHIP 22uF 20% 10V
C937	1-104-851-11	s	TANTALUM, CHIP 10uF 20% 10V
C938	1-162-919-11	s	CERAMIC, CHIP 22PF 5% 50V
C939	1-162-957-11	s	CERAMIC, CHIP 220PF 5% 50V
CV800	1-141-368-11	s	CAP, CHIP TRIMMER 30PF
D500	8-719-820-41	s	DIODE 1SS302
D501	8-719-820-41	s	DIODE 1SS302
D502	8-719-404-35	s	DIODE MA141WK
D700	8-719-041-68	s	DIODE RD3.3UH-T1
D701	8-719-041-68	s	DIODE RD3.3UH-T1
D702	8-759-274-67	s	IC LM4040BIM3X-5.0
D703	8-719-041-68	s	DIODE RD3.3UH-T1
D704	8-719-820-41	s	DIODE 1SS302
D705	8-719-820-41	s	DIODE 1SS302
D706	8-719-820-41	s	DIODE 1SS302
D708	8-719-059-59	s	DIODE MA3J74200LSO
D800	8-719-820-41	s	DIODE 1SS302
D801	8-719-404-35	s	DIODE MA141WK
DL800	1-415-487-11	s	DELAY LINE 140nS
IC1	8-759-082-61	s	IC TC4W53FU
IC2	8-759-209-69	s	IC TC4S11F
IC3	8-759-209-69	s	IC TC4S11F
IC4	8-759-209-69	s	IC TC4S11F
IC5	8-759-054-61	s	IC CLC505AJE
IC6	8-759-082-61	s	IC TC4W53FU
IC7	8-759-058-62	s	IC TC7S08FU(TE85R)
IC8	8-759-196-93	s	IC TC7SH00FU-TE85R
IC9	8-759-470-51	s	IC MB88141APFV-ER
IC10	8-759-058-54	s	IC TC7S00FU(TE85R)
IC11	8-759-058-55	s	IC TC7S02FU-TE85L
IC12	8-759-196-97	s	IC TC7SH32FU-TE85R
IC13	8-759-058-62	s	IC TC7S08FU(TE85R)
IC14	8-759-058-62	s	IC TC7S08FU(TE85R)
IC100	8-759-082-61	s	IC TC4W53FU
IC200	8-759-082-61	s	IC TC4W53FU
IC300	8-759-049-60	s	IC SN74HC08APW-E05
IC301	8-759-260-55	s	IC TLC272CPW-E05
IC303	8-759-082-61	s	IC TC4W53FU
IC400	8-759-049-58	s	IC SN74HC04APW-E05
IC401	8-759-271-18	s	IC NJM1496V
IC402	8-759-058-64	s	IC TC7S32FU(TE85R)
IC403	8-759-082-61	s	IC TC4W53FU
IC404	8-759-276-00	s	IC TC7W139FU(TE12R)

[for BVP-900(UC)]

(MS-57A/57B/57P BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC405	8-759-058-54	s	IC TC7S00FU(TE85R) [for BVP-900(UC)]
IC406	8-759-082-61	s	IC TC4W53FU
IC407	8-759-058-55	s	IC TC7S02FU-TE85L
IC408	8-759-195-81	s	IC TC7S86FU
IC409	8-759-058-62	s	IC TC7S08FU(TE85R)
IC410	8-759-058-55	s	IC TC7S02FU-TE85L
IC500	8-759-987-27	s	IC LM1881M
IC501	8-759-049-58	s	IC SN74HC04APW-E05
IC502	8-759-066-55	s	IC TA75W393FU
IC602	8-759-008-84	s	IC MC14015BF
IC700	8-759-082-53	s	IC TLC274CPW
IC701	8-759-049-96	s	IC SN74HC32APW-E05
IC702	8-759-050-00	s	IC SN74HC86APW-E05
IC703	8-759-147-84	s	IC CXD8072Q
IC704	8-759-523-02	s	IC TC74HC4053AFT(EL)
IC705	8-759-076-06	s	IC TL064CPW
IC706	8-759-049-60	s	IC SN74HC08APW-E05
IC707	8-759-058-62	s	IC TC7S08FU(TE85R)
IC710	8-759-058-62	s	IC TC7S08FU(TE85R)
IC711	8-759-064-36	s	IC MB88346BPFV
IC712	8-759-058-54	s	IC TC7S00FU(TE85R)
IC800	8-752-372-78	s	IC CXD2024AQ
IC801	8-759-603-54	s	IC M51271FP
IC802	8-759-523-02	s	IC TC74HC4053AFT(EL)
IC803	8-759-049-56	s	IC SN74HC02APW-E05
IC804	8-759-987-27	s	IC LM1881M
IC805	8-759-523-04	s	IC TC74HC4538AFT(EL)
IC807	8-759-050-06	s	IC SN74HC157APW
IC808	8-759-523-02	s	IC TC74HC4053AFT(EL)
IC809	8-759-271-16	s	IC MN8232A
IC810	8-759-170-98	s	IC TC524256BJ-10-EL
IC811	8-759-271-17	s	IC MN6790S
IC812	8-759-523-02	s	IC TC74HC4053AFT(EL)
IC813	8-759-987-27	s	IC LM1881M
IC814	8-759-058-54	s	IC TC7S00FU(TE85R)
IC815	8-759-523-04	s	IC TC74HC4538AFT(EL)
IC816	8-759-058-54	s	IC TC7S00FU(TE85R)
JC800	1-216-864-11	s	METAL, CHIP 0 5% 1/16W [for BVP-900(J), BVP-900(UC)]
JC801	1-216-864-11	s	METAL, CHIP 0 5% 1/16W [for BVP-900P(CE)]
JC802	1-216-864-11	s	METAL, CHIP 0 5% 1/16W [for BVP-900P(CE)]
JC803	1-216-864-11	s	METAL, CHIP 0 5% 1/16W [for BVP-900(J), BVP-900(UC)]
JC804	1-216-864-11	s	METAL, CHIP 0 5% 1/16W [for BVP-900P(CE)]
L1	1-412-026-11	s	INDUCTOR, CHIP 1uH
L2	1-412-026-11	s	INDUCTOR, CHIP 1uH
L3	1-412-026-11	s	INDUCTOR, CHIP 1uH
L4	1-412-029-11	s	INDUCTOR, CHIP 10uH
L100	1-412-026-11	s	INDUCTOR, CHIP 1uH
L101	1-412-026-11	s	INDUCTOR, CHIP 1uH
L102	1-412-026-11	s	INDUCTOR, CHIP 1uH
L200	1-412-026-11	s	INDUCTOR, CHIP 1uH
L201	1-412-026-11	s	INDUCTOR, CHIP 1uH
L202	1-412-026-11	s	INDUCTOR, CHIP 1uH
L300	1-412-026-11	s	INDUCTOR, CHIP 1uH

(MS-57A/57B/57P BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
L301	1-412-026-11	s	INDUCTOR, CHIP 1uH
L302	1-412-026-11	s	INDUCTOR, CHIP 1uH
L400	1-412-026-11	s	INDUCTOR, CHIP 1uH
L401	1-412-026-11	s	INDUCTOR, CHIP 1uH
L402	1-412-026-11	s	INDUCTOR, CHIP 1uH
L404	1-412-026-11	s	INDUCTOR, CHIP 1uH
L405	1-412-026-11	s	INDUCTOR, CHIP 1uH
L406	1-410-374-11	s	INDUCTOR, CHIP 2.7uH
L407	1-410-379-31	s	INDUCTOR, CHIP 6.8uH
L500	1-412-026-11	s	INDUCTOR, CHIP 1uH
L501	1-412-026-11	s	INDUCTOR, CHIP 1uH
L502	1-412-026-11	s	INDUCTOR, CHIP 1uH
L700	1-412-029-11	s	INDUCTOR, CHIP 10uH
L701	1-412-029-11	s	INDUCTOR, CHIP 10uH
L702	1-412-029-11	s	INDUCTOR, CHIP 10uH
L703	1-412-029-11	s	INDUCTOR, CHIP 10uH
L704	1-412-029-11	s	INDUCTOR, CHIP 10uH
L800	1-412-026-11	s	INDUCTOR, CHIP 1uH
L801	1-412-029-11	s	INDUCTOR, CHIP 10uH
L802	1-410-384-31	s	INDUCTOR, CHIP 18uH
L803	1-410-384-31	s	INDUCTOR, CHIP 18uH
L804	1-410-378-11	s	INDUCTOR, CHIP 5.6uH
L805	1-412-026-11	s	INDUCTOR, CHIP 1uH
L806	1-410-393-11	s	INDUCTOR, CHIP 100uH
L807	1-410-393-11	s	INDUCTOR, CHIP 100uH
L808	1-412-026-11	s	INDUCTOR, CHIP 1uH
L809	1-412-026-11	s	INDUCTOR, CHIP 1uH
L810	1-412-029-11	s	INDUCTOR, CHIP 10uH
L811	1-410-388-31	s	INDUCTOR, CHIP 39uH
L812	1-410-388-31	s	INDUCTOR, CHIP 39uH
L813	1-410-388-31	s	INDUCTOR, CHIP 39uH
L814	1-412-026-11	s	INDUCTOR, CHIP 1uH
L815	1-412-029-11	s	INDUCTOR, CHIP 10uH
L816	1-412-029-11	s	INDUCTOR, CHIP 10uH
L817	1-410-385-11	s	INDUCTOR, CHIP 22uH
L818	1-410-388-31	s	INDUCTOR, CHIP 39uH
L819	1-410-388-31	s	INDUCTOR, CHIP 39uH
L820	1-412-026-11	s	INDUCTOR, CHIP 1uH
Q1	8-729-040-48	s	TRANSISTOR 2SA1688-4-SONY-TL
Q2	8-729-040-48	s	TRANSISTOR 2SA1688-4-SONY-TL
Q3	8-729-230-38	s	TRANSISTOR 2SC4215Y
Q4	8-729-230-38	s	TRANSISTOR 2SC4215Y
Q5	8-729-230-38	s	TRANSISTOR 2SC4215Y
Q6	8-729-040-48	s	TRANSISTOR 2SA1688-4-SONY-TL
Q8	8-729-040-48	s	TRANSISTOR 2SA1688-4-SONY-TL
Q9	8-729-040-48	s	TRANSISTOR 2SA1688-4-SONY-TL
Q10	8-729-040-48	s	TRANSISTOR 2SA1688-4-SONY-TL
Q11	8-729-040-48	s	TRANSISTOR 2SA1688-4-SONY-TL
Q12	8-729-230-38	s	TRANSISTOR 2SC4215Y
Q13	8-729-230-38	s	TRANSISTOR 2SC4215Y
Q14	8-729-024-56	s	TRANSISTOR 2SA1808
Q15	8-729-230-38	s	TRANSISTOR 2SC4215Y
Q16	8-729-040-48	s	TRANSISTOR 2SA1688-4-SONY-TL
Q17	8-729-230-38	s	TRANSISTOR 2SC4215Y
Q18	8-729-040-48	s	TRANSISTOR 2SA1688-4-SONY-TL
Q19	8-729-425-41	s	TRANSISTOR 2SK1374
Q20	8-729-026-32	s	TRANSISTOR XP6534
Q21	8-729-026-31	s	TRANSISTOR XP6435

(MS-57A/57B/57P BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R1040	1-218-692-11	s METAL, CHIP 1K 0.50% 1/16W
R1041	1-218-692-11	s METAL, CHIP 1K 0.50% 1/16W
R1042	1-218-710-11	s METAL, CHIP 5.6K 0.50% 1/16W
R1044	1-216-857-11	s METAL, CHIP 1M 5% 1/16W
R1045	1-216-857-11	s METAL, CHIP 1M 5% 1/16W
R1046	1-218-692-11	s METAL, CHIP 1K 0.50% 1/16W
R1047	1-218-700-11	s METAL, CHIP 2.2K 0.50% 1/16W
R1048	1-218-692-11	s METAL, CHIP 1K 0.50% 1/16W
R1049	1-218-724-11	s METAL, CHIP 22K 5% 1/16W
R1051	1-218-716-11	s METAL, CHIP 10K 0.50% 1/16W
R1052	1-218-684-11	s METAL, CHIP 470 0.50% 1/16W
R1053	1-218-714-11	s METAL, CHIP 8.2K 0.50% 1/16W
R1054	1-218-698-11	s METAL, CHIP 1.8K 0.50% 1/16W
R1055	1-218-668-11	s METAL, CHIP 100 0.50% 1/16W
R1056	1-218-712-11	s METAL, CHIP 6.8K 0.50% 1/16W
R1057	1-218-722-11	s METAL, CHIP 18K 0.50% 1/16W
RB300	1-239-024-11	s MATRIX RESISTOR
RV1	1-237-036-11	s RES, ADJ METAL 10K
RV3	1-237-039-11	s RES, ADJ METAL 100K
RV4	1-237-036-11	s RES, ADJ METAL 10K
RV170	1-237-036-11	s RES, ADJ METAL 10K
RV200	1-237-036-11	s RES, ADJ METAL 10K
RV300	1-237-034-11	s RES, ADJ METAL 2K
RV301	1-237-034-11	s RES, ADJ METAL 2K
RV302	1-237-038-11	s RES, ADJ METAL 50K
RV303	1-237-033-11	s RES, ADJ METAL 1K
RV304	1-237-035-11	s RES, ADJ METAL 5K
RV305	1-237-038-11	s RES, ADJ METAL 50K [for BVP-900(UC)]
RV700	1-241-266-11	s RES, ADJ, METAL 50K
RV701	1-241-266-11	s RES, ADJ, METAL 50K
RV800	1-237-036-11	s RES, ADJ METAL 10K
RV801	1-237-036-11	s RES, ADJ METAL 10K
RV802	1-237-031-11	s RES, ADJ METAL 200
RV803	1-237-034-11	s RES, ADJ METAL 2K
RV804	1-237-034-11	s RES, ADJ METAL 2K
RV805	1-237-034-11	s RES, ADJ METAL 2K
S401	1-762-118-21	s SWITCH, TOGGLE
S700	1-692-530-11	s SWITCH, TOGGLE
S701	1-692-530-11	s SWITCH, TOGGLE
X800	1-579-994-12	s CRYSTAL 14.31818MHz [for BVP-900(J), BVP-900(UC)]
X800	1-579-995-12	s CRYSTAL 17.7344750MHz [for BVP-900P(CE)]

PR-237 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8317-916-A	o MOUNTED CIRCUIT BOARD, PR-237
3pcs	3-729-061-01	s SCREW (M2X4.5) (TYPE 1)
1pc	2-251-622-01	o LEVER, PC BOARD
C1	1-104-913-11	s TANTALUM, CHIP 10uF 20% 16V
C4	1-162-921-11	s CERAMIC, CHIP 33PF 5% 50V
C5	1-162-915-11	s CERAMIC, CHIP 10PF 50V
C6	1-162-915-11	s CERAMIC, CHIP 10PF 50V
C7	1-162-921-11	s CERAMIC, CHIP 33PF 5% 50V
C8	1-128-390-11	s ELECT 220uF 20% 6.3V
C9	1-164-505-11	s CERAMIC, CHIP 2.2uF 16V
C12	1-164-156-11	s CERAMIC, CHIP 0.1uF 25V
C13	1-107-686-11	s TANTALUM, CHIP 4.7uF 20% 16V
C15	1-104-913-11	s TANTALUM, CHIP 10uF 20% 16V
C16	1-104-913-11	s TANTALUM, CHIP 10uF 20% 16V
C17	1-164-505-11	s CERAMIC, CHIP 2.2uF 16V
C18	1-164-505-11	s CERAMIC, CHIP 2.2uF 16V
C19	1-164-505-11	s CERAMIC, CHIP 2.2uF 16V
C20	1-113-682-11	s TANTALUM, CHIP 33uF 20% 10V
C21	1-104-852-11	s TANTALUM, CHIP 22uF 20% 10V
C22	1-164-505-11	s CERAMIC, CHIP 2.2uF 16V
C23	1-113-682-11	s TANTALUM, CHIP 33uF 20% 10V
C24	1-104-851-11	s TANTALUM, CHIP 10uF 20% 10V
C25	1-104-851-11	s TANTALUM, CHIP 10uF 20% 10V
C26	1-104-851-11	s TANTALUM, CHIP 10uF 20% 10V
C27	1-104-913-11	s TANTALUM, CHIP 10uF 20% 16V
C28	1-164-156-11	s CERAMIC, CHIP 0.1uF 25V
C29	1-164-505-11	s CERAMIC, CHIP 2.2uF 16V
C30	1-164-505-11	s CERAMIC, CHIP 2.2uF 16V
C31	1-164-156-11	s CERAMIC, CHIP 0.1uF 25V
C32	1-164-156-11	s CERAMIC, CHIP 0.1uF 25V
C33	1-164-156-11	s CERAMIC, CHIP 0.1uF 25V
C34	1-164-156-11	s CERAMIC, CHIP 0.1uF 25V
C35	1-113-682-11	s TANTALUM, CHIP 33uF 20% 10V
C36	1-164-505-11	s CERAMIC, CHIP 2.2uF 16V
C37	1-164-505-11	s CERAMIC, CHIP 2.2uF 16V
C38	1-104-913-11	s TANTALUM, CHIP 10uF 20% 16V
C39	1-164-505-11	s CERAMIC, CHIP 2.2uF 16V
C40	1-104-851-11	s TANTALUM, CHIP 10uF 20% 10V
C41	1-104-851-11	s TANTALUM, CHIP 10uF 20% 10V
C42	1-113-682-11	s TANTALUM, CHIP 33uF 20% 10V
C43	1-164-505-11	s CERAMIC, CHIP 2.2uF 16V
C44	1-164-505-11	s CERAMIC, CHIP 2.2uF 16V
C45	1-113-682-11	s TANTALUM, CHIP 33uF 20% 10V
C46	1-164-156-11	s CERAMIC, CHIP 0.1uF 25V
C47	1-164-505-11	s CERAMIC, CHIP 2.2uF 16V
C48	1-104-851-11	s TANTALUM, CHIP 10uF 20% 10V
C49	1-113-682-11	s TANTALUM, CHIP 33uF 20% 10V
C50	1-164-505-11	s CERAMIC, CHIP 2.2uF 16V
C51	1-164-505-11	s CERAMIC, CHIP 2.2uF 16V
C52	1-164-505-11	s CERAMIC, CHIP 2.2uF 16V
C53	1-113-682-11	s TANTALUM, CHIP 33uF 20% 10V
C54	1-113-682-11	s TANTALUM, CHIP 33uF 20% 10V
C55	1-104-851-11	s TANTALUM, CHIP 10uF 20% 10V
C56	1-164-156-11	s CERAMIC, CHIP 0.1uF 25V
C57	1-104-851-11	s TANTALUM, CHIP 10uF 20% 10V
C58	1-164-156-11	s CERAMIC, CHIP 0.1uF 25V
C59	1-164-156-11	s CERAMIC, CHIP 0.1uF 25V
C60	1-164-505-11	s CERAMIC, CHIP 2.2uF 16V

(PR-237 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C61	1-164-505-11	s CERAMIC, CHIP 2.2uF 16V
C62	1-128-390-11	s ELECT 220uF 20% 6.3V
C63	1-164-156-11	s CERAMIC, CHIP 0.1uF 25V
C64	1-113-682-11	s TANTALUM, CHIP 33uF 20% 10V
C65	1-113-682-11	s TANTALUM, CHIP 33uF 20% 10V
C66	1-164-505-11	s CERAMIC, CHIP 2.2uF 16V
C67	1-164-505-11	s CERAMIC, CHIP 2.2uF 16V
C68	1-164-156-11	s CERAMIC, CHIP 0.1uF 25V
C69	1-128-390-11	s ELECT 220uF 20% 6.3V
C70	1-164-505-11	s CERAMIC, CHIP 2.2uF 16V
C71	1-164-505-11	s CERAMIC, CHIP 2.2uF 16V
C72	1-113-682-11	s TANTALUM, CHIP 33uF 20% 10V
C73	1-113-682-11	s TANTALUM, CHIP 33uF 20% 10V
C74	1-164-505-11	s CERAMIC, CHIP 2.2uF 16V
C75	1-104-913-11	s TANTALUM, CHIP 10uF 20% 16V
C76	1-107-686-11	s TANTALUM, CHIP 4.7uF 20% 16V
C77	1-113-987-11	s TANTALUM, CHIP 4.7uF 20% 25V
C78	1-104-913-11	s TANTALUM, CHIP 10uF 20% 16V
C79	1-164-156-11	s CERAMIC, CHIP 0.1uF 25V
C80	1-104-915-11	s TANTALUM, CHIP 2.2uF 20% 20V
C81	1-107-686-11	s TANTALUM, CHIP 4.7uF 20% 16V
C82	1-164-505-11	s CERAMIC, CHIP 2.2uF 16V
C83	1-113-682-11	s TANTALUM, CHIP 33uF 20% 10V
C84	1-104-915-11	s TANTALUM, CHIP 2.2uF 20% 20V
C85	1-164-505-11	s CERAMIC, CHIP 2.2uF 16V
C86	1-128-390-11	s ELECT 220uF 20% 6.3V
C87	1-104-913-11	s TANTALUM, CHIP 10uF 20% 16V
C88	1-113-682-11	s TANTALUM, CHIP 33uF 20% 10V
C89	1-113-682-11	s TANTALUM, CHIP 33uF 20% 10V
C90	1-164-505-11	s CERAMIC, CHIP 2.2uF 16V
C91	1-164-505-11	s CERAMIC, CHIP 2.2uF 16V
C92	1-164-156-11	s CERAMIC, CHIP 0.1uF 25V
C93	1-104-913-11	s TANTALUM, CHIP 10uF 20% 16V
C94	1-104-913-11	s TANTALUM, CHIP 10uF 20% 16V
C95	1-164-156-11	s CERAMIC, CHIP 0.1uF 25V
C104	1-164-156-11	s CERAMIC, CHIP 0.1uF 25V
C111	1-115-156-11	s CERAMIC 1uF 25V
C112	1-164-156-11	s CERAMIC, CHIP 0.1uF 25V
C113	1-162-924-11	s CERAMIC 56PF 5% 50V
C114	1-162-924-11	s CERAMIC 56PF 5% 50V
D1	8-719-059-59	s DIODE MA3J74200LSO
D2	8-719-041-68	s DIODE RD3.3UH-T1
D4	8-719-041-68	s DIODE RD3.3UH-T1
D6	8-719-059-59	s DIODE MA3J74200LSO
FL1	1-234-040-21	s FILTER, LOW PASS
FL2	1-234-040-21	s FILTER, LOW PASS
FL3	1-234-040-21	s FILTER, LOW PASS
IC1	8-759-528-99	s IC TC74VHC221AFT(EL)
IC2	8-759-491-46	s IC TC74VHCT04AFT(EL)
IC3	8-759-447-77	s IC TC7WH74FU(TE12R)
IC4	8-759-528-99	s IC TC74VHC221AFT(EL)
IC5	8-759-260-55	s IC TLC272CPW-E05
IC7	8-759-389-26	s IC 74LCX08MTCX
IC9	8-752-357-62	s IC CXD2307R
IC10	8-759-182-95	s IC HD151015T
IC11	8-759-497-31	s IC LC35256DT-70-TLM
IC12	8-759-050-50	s IC SN74HCT04APW-E05
IC13	8-759-076-06	s IC TL064CPW

(PR-237 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
IC14	8-759-082-61	s IC TC4W53FU
IC15	8-759-918-65	s IC TL7700CPS
IC16	8-759-082-61	s IC TC4W53FU
IC17	8-759-059-50	s IC MB88351PFV
IC18	8-759-082-60	s IC TC7S66FU
IC19	8-759-082-61	s IC TC4W53FU
IC20	8-759-082-60	s IC TC7S66FU
IC21	8-759-082-61	s IC TC4W53FU
IC22	8-759-386-27	s IC 74LCX04MTCX
IC23	8-759-051-48	s IC SN74HCT541APW-E05
IC25	8-759-051-48	s IC SN74HCT541APW-E05
IC26	8-759-058-54	s IC TC7S00FU(TE85R)
IC30	8-759-456-26	s IC 74LCX541MTCX
IC31	8-759-260-55	s IC TLC272CPW-E05
IC36	8-759-466-55	s IC 74LCX74MTCX
IC37	8-759-274-67	s IC LM4040BIM3X-5.0
L1	1-412-026-11	s INDUCTOR, CHIP 1uH
L2	1-412-026-11	s INDUCTOR, CHIP 1uH
L3	1-412-026-11	s INDUCTOR, CHIP 1uH
L4	1-412-026-11	s INDUCTOR, CHIP 1uH
L5	1-412-026-11	s INDUCTOR, CHIP 1uH
L6	1-412-026-11	s INDUCTOR, CHIP 1uH
L7	1-412-026-11	s INDUCTOR, CHIP 1uH
L8	1-412-026-11	s INDUCTOR, CHIP 1uH
L9	1-412-026-11	s INDUCTOR, CHIP 1uH
L10	1-412-026-11	s INDUCTOR, CHIP 1uH
L11	1-412-026-11	s INDUCTOR, CHIP 1uH
L12	1-412-029-11	s INDUCTOR, CHIP 10uH
L13	1-412-029-11	s INDUCTOR, CHIP 10uH
L14	1-412-026-11	s INDUCTOR, CHIP 1uH
L15	1-412-029-11	s INDUCTOR, CHIP 10uH
L16	1-412-026-11	s INDUCTOR, CHIP 1uH
L17	1-412-029-11	s INDUCTOR, CHIP 10uH
L18	1-412-026-11	s INDUCTOR, CHIP 1uH
Q1	8-729-117-16	s TRANSISTOR 2SA1611-M6
Q2	8-729-117-16	s TRANSISTOR 2SA1611-M6
Q3	8-729-117-16	s TRANSISTOR 2SA1611-M6
Q4	8-729-924-39	s TRANSISTOR DTC143XU
Q5	8-729-101-07	s TRANSISTOR 2SB798
Q6	8-729-807-51	s TRANSISTOR 2SD1623-S
R1	1-218-728-11	s METAL, CHIP 33K 0.50% 1/16W
R2	1-218-690-11	s METAL, CHIP 820 0.50% 1/16W
R3	1-218-734-11	s METAL, CHIP 56K 5% 1/16W
R4	1-218-690-11	s METAL, CHIP 820 0.50% 1/16W
R5	1-216-851-11	s METAL, CHIP 330K 5% 1/16W
R7	1-218-736-11	s METAL, CHIP 68K 0.50% 1/16W
R8	1-218-676-11	s METAL, CHIP 220 0.50% 1/16W
R9	1-216-864-11	s METAL, CHIP 0 5% 1/16W
R12	1-218-740-11	s METAL, CHIP 100K 0.50% 1/16W
R14	1-218-668-11	s METAL, CHIP 100 0.50% 1/16W
R15	1-216-851-11	s METAL, CHIP 330K 5% 1/16W
R16	1-218-740-11	s METAL, CHIP 100K 0.50% 1/16W
R17	1-218-740-11	s METAL, CHIP 100K 0.50% 1/16W
R18	1-218-692-11	s METAL, CHIP 1K 0.50% 1/16W
R19	1-218-676-11	s METAL, CHIP 220 0.50% 1/16W
R20	1-216-864-11	s METAL, CHIP 0 5% 1/16W
R21	1-216-864-11	s METAL, CHIP 0 5% 1/16W

1-4. Supplied Accessories List

Ref. No. or Q'ty	Part No.	SP Description
2pcs	2-280-511-01	o BRACKET, ADJUSTMENT, ANGLE
2pcs	3-185-945-01	s PLATE, NO
2pcs	3-612-712-01	s BAND, CLAMP
1pc	3-612-749-01	s PLATE, NUMBER
1pc	3-701-648-00	s BAG, POLYETHYLENE
1pc	4-027-937-01	s PLATE, NUMBER

1-5. Optional Fixtures List

Part No.	SP Description
7-320-000-90	o RTV ADHESIVE
A-8314-124-A	o EXTENSION BOARD, EX-439
J-6394-290-A	o OHB EXTENSION HARNESS
J-6470-430-A	o POWER ASSY EXTENSION HARNESS

1-6. Changed Parts

NOTE: The numbers identified by marking with) are matching with each serial numbers.
See the table matched with each serial numbers.

711) Serial No. 10041-(UC), 30011-(J), 40021-(CE)
801) Serial No. 10076-15000(UC), 30011-35000(J), 40031-45000(CE)
802) Serial No. 10076-(UC), 30011-(J), 40031-(CE)
803) Serial No. 10076-(UC), 30021-(J), 40031-(CE)
804) Serial No. 15001-(UC), 35001-(J), 45001-(CE)
911) Serial No. 18001-(UC), 38001-(J), 48001-(CE)

AD-148 BOARD

711) IC706	NOT IN USE.	---	8-759-059-50	s	IC MB88351PFV
711) IC801	NOT IN USE.	---	8-759-058-62	s	IC TC7S08FU(TE85R)
711) IC802	NOT IN USE.	---	8-759-058-54	s	IC TC7S00FU(TE85R)
711) IC803	NOT IN USE.	---	8-759-058-62	s	IC TC7S08FU(TE85R)
803) R65	1-218-752-11 s METAL 330K 0.50% 1/16W	---	1-216-851-11	s	METAL,CHIP 330K 5% 1/16W
803) R75	1-218-752-11 s METAL 330K 0.50% 1/16W	---	1-216-851-11	s	METAL,CHIP 330K 5% 1/16W
803) R164	1-218-752-11 s METAL 330K 0.50% 1/16W	---	1-216-851-11	s	METAL,CHIP 330K 5% 1/16W
803) R174	1-218-752-11 s METAL 330K 0.50% 1/16W	---	1-216-851-11	s	METAL,CHIP 330K 5% 1/16W
803) R263	1-218-752-11 s METAL 330K 0.50% 1/16W	---	1-216-851-11	s	METAL,CHIP 330K 5% 1/16W
803) R273	1-218-752-11 s METAL 330K 0.50% 1/16W	---	1-216-851-11	s	METAL,CHIP 330K 5% 1/16W
803) R305	1-218-752-11 s METAL 330K 0.50% 1/16W	---	1-216-851-11	s	METAL,CHIP 330K 5% 1/16W
803) R405	1-218-752-11 s METAL 330K 0.50% 1/16W	---	1-216-851-11	s	METAL,CHIP 330K 5% 1/16W
803) R505	1-218-752-11 s METAL 330K 0.50% 1/16W	---	1-216-851-11	s	METAL,CHIP 330K 5% 1/16W
911) IC304	8-759-498-15 s IC ADS805U	---	8-759-655-63	s	IC ADS805U/1K
911) IC404	8-759-498-15 s IC ADS805U	---	8-759-655-63	s	IC ADS805U/1K
911) IC504	8-759-498-15 s IC ADS805U	---	8-759-655-63	s	IC ADS805U/1K

AT-120 BOARD

711) C121	NOT IN USE.	---	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
711) C122	NOT IN USE.	---	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V
711) R79	1-218-740-11 s METAL 100K 0.50% 1/16W	---	1-218-748-11	s	METAL, CHIP 220K 0.50% 1/16W
711) R81	1-218-740-11 s METAL 100K 0.50% 1/16W	---	1-218-748-11	s	METAL, CHIP 220K 0.50% 1/16W
711) R104	NOT IN USE.	---	1-218-737-11	s	METAL, CHIP 75K 0.50% 1/16W
711) R105	NOT IN USE.	---	1-218-737-11	s	METAL, CHIP 75K 0.50% 1/16W
802) R17	1-218-692-11 s CHIP, METAL 1K 0.5% 1/16W	---	1-218-708-11	s	CHIP, METAL 4.7K 0.5% 1/16W
802) R44	1-218-740-11 s METAL 100K 0.5% 1/16W	---	1-218-716-11	s	METAL, CHIP 10K 0.5% 1/16W
802) R45	1-218-692-11 s CHIP, METAL 1K 0.5% 1/16W	---	1-218-716-11	s	METAL, CHIP 10K 0.5% 1/16W
804) C123	NOT IN USE.	---	1-104-851-11	s	TANTALUM, CHIP 10uF 20% 10V
804) R103	1-247-855-11 s CARBON 10K 5% 1/4W	---	1-218-732-11	s	METAL, CHIP 47K 0.50% 1/16W
911) IC25	8-759-458-89 s IC MSM82C51A-2GS-K	---	8-759-654-94	s	IC MSM82C51A-2GS-KR1
911) IC29	8-759-458-89 s IC MSM82C51A-2GS-K	---	8-759-654-94	s	IC MSM82C51A-2GS-KR1
911) IC41	8-759-632-39 s IC M51958A-T1	---	8-759-369-92	s	IC M51958AFP600D

LE-172/216 BOARD

804) 1pc	A-8273-190-A o MOUNTED CIRCUIT BOARD, LE-172	---	A-8320-191-A o MOUNTED CIRCUIT BOARD, LE-216
----------	--	-----	--

MS-57A/57B/57P BOARD

804) 4pcs	7-682-902-01 s SCREW +PWH 2.6X4 [for BVP-900P(CE)]	---	7-621-759-35	s	+PSW, 2.6X5
804) IC810	8-759-271-15 s IC HM53461JP-12	---	8-759-170-98	s	IC TC524256BJ-10-EL
804) R517	1-218-752-11 s METAL, CHIP 330K 0.50% 1/16W	---	1-216-851-11	s	METAL, CHIP 330K 5% 1/16W
804) R580	1-218-720-11 s METAL, CHIP 15K 0.50% 1/16W	---	1-218-696-11	s	METAL, CHIP 1.5K 0.50% 1/16W
911) IC14	NOT IN USE.	---	8-759-058-62	s	IC TC7S08FU (TE85R)

PR-237 BOARD

801) C112 NOT IN USE.
802) C111 NOT IN USE.
804) C112 1-162-806-11 s CERAMIC 0.1uF 10% 50V
804) C113 NOT IN USE.
804) C114 NOT IN USE.

804) IC7 8-759-386-28 s IC 74LCX00MTCX
804) IC36 NOT IN USE.
804) R5 1-218-752-11 s METAL, CHIP 330K 0.50% 1/16W
804) R15 1-218-752-11 s METAL, CHIP 330K 0.50% 1/16W
804) R21 NOT IN USE.


804) R126 1-218-668-11 s METAL, CHIP 100 0.50% 1/16W
804) R149 1-216-864-11 s METAL, CHIP 0 5% 1/16W
911) D3 8-759-274-67 s IC LM4040BIM3X-5.0
911) IC37 NOT IN USE.


---> 1-162-806-11 s CERAMIC 0.1uF 10% 50V
---> 1-115-156-11 s CERAMIC 1uF 25V
---> 1-164-156-11 s CERAMIC, CHIP 0.1uF 25V
---> 1-162-924-11 s CERAMIC 56PF 5% 50V
---> 1-162-924-11 s CERAMIC 56PF 5% 50V

---> 8-759-389-26 s IC 74LCX08MTCX
---> 8-759-466-55 s IC 74LCX74MTCX
---> 1-216-851-11 s METAL, CHIP 330K 5% 1/16W
---> 1-216-851-11 s METAL, CHIP 330K 5% 1/16W
---> 1-216-864-11 s METAL, CHIP 0 5% 1/16W

---> DELETED.
---> DELETED.
---> DELETED.
---> 8-759-274-67 s IC LM4040BIM3X-5.0



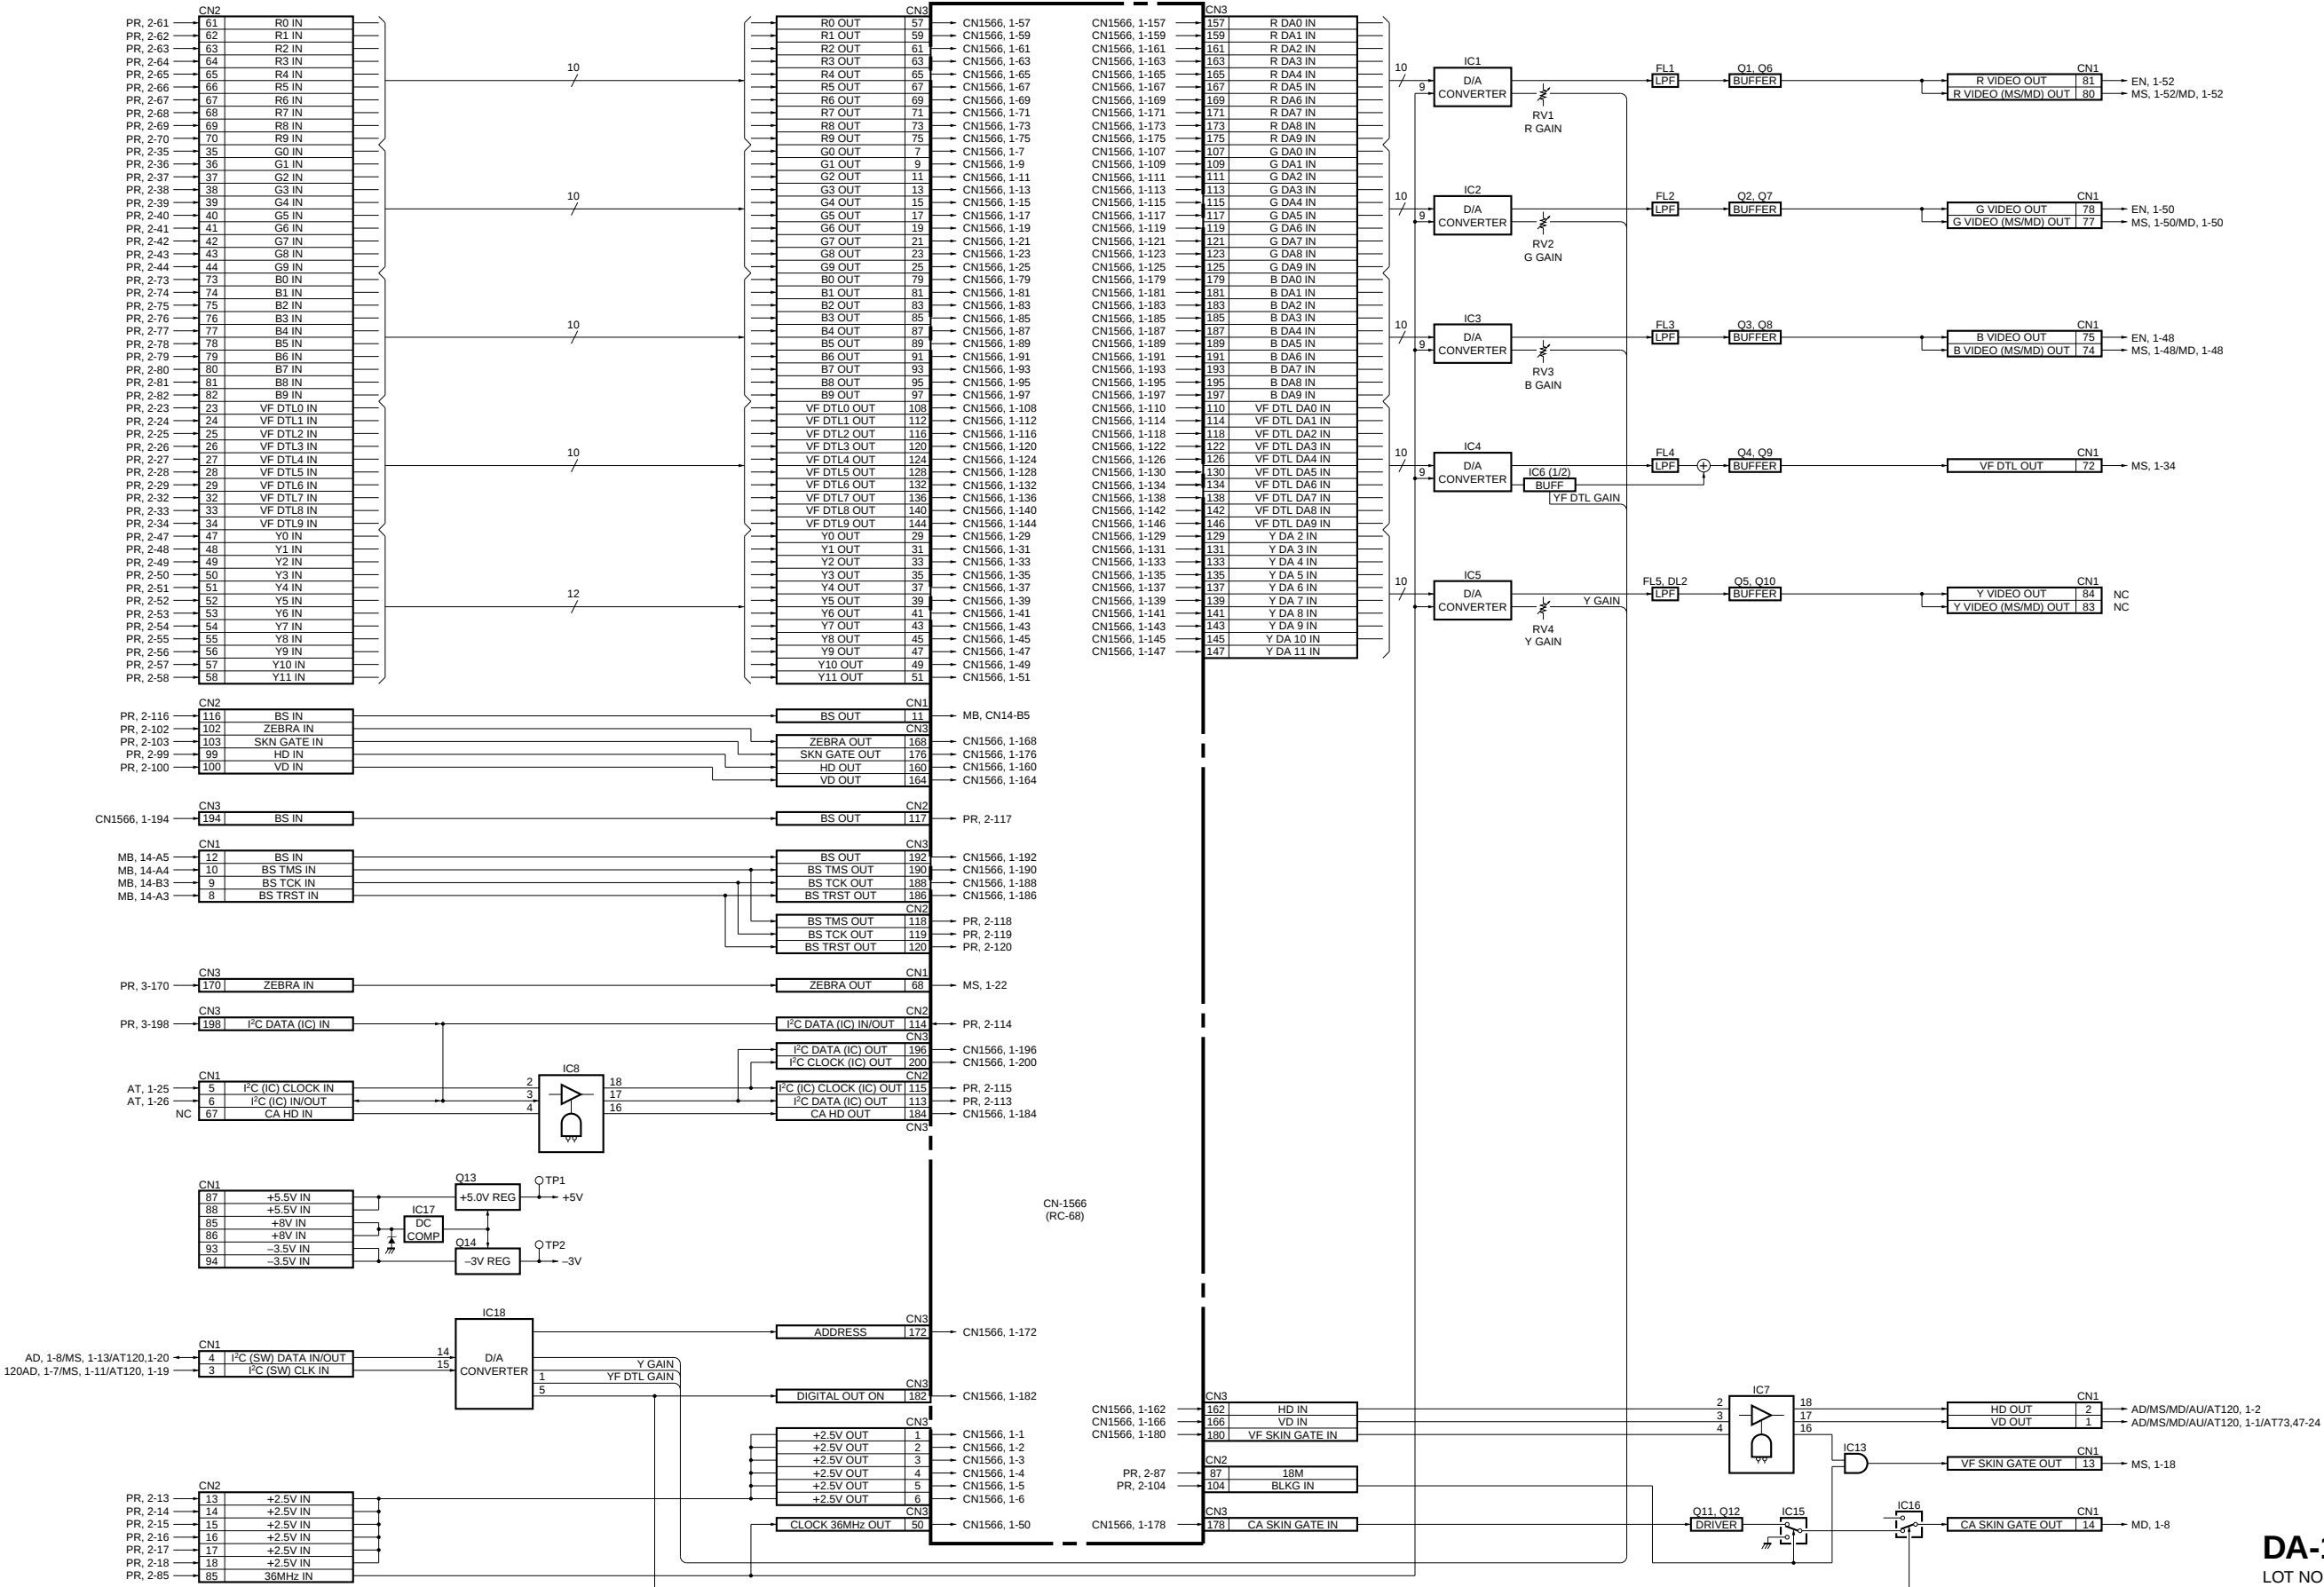


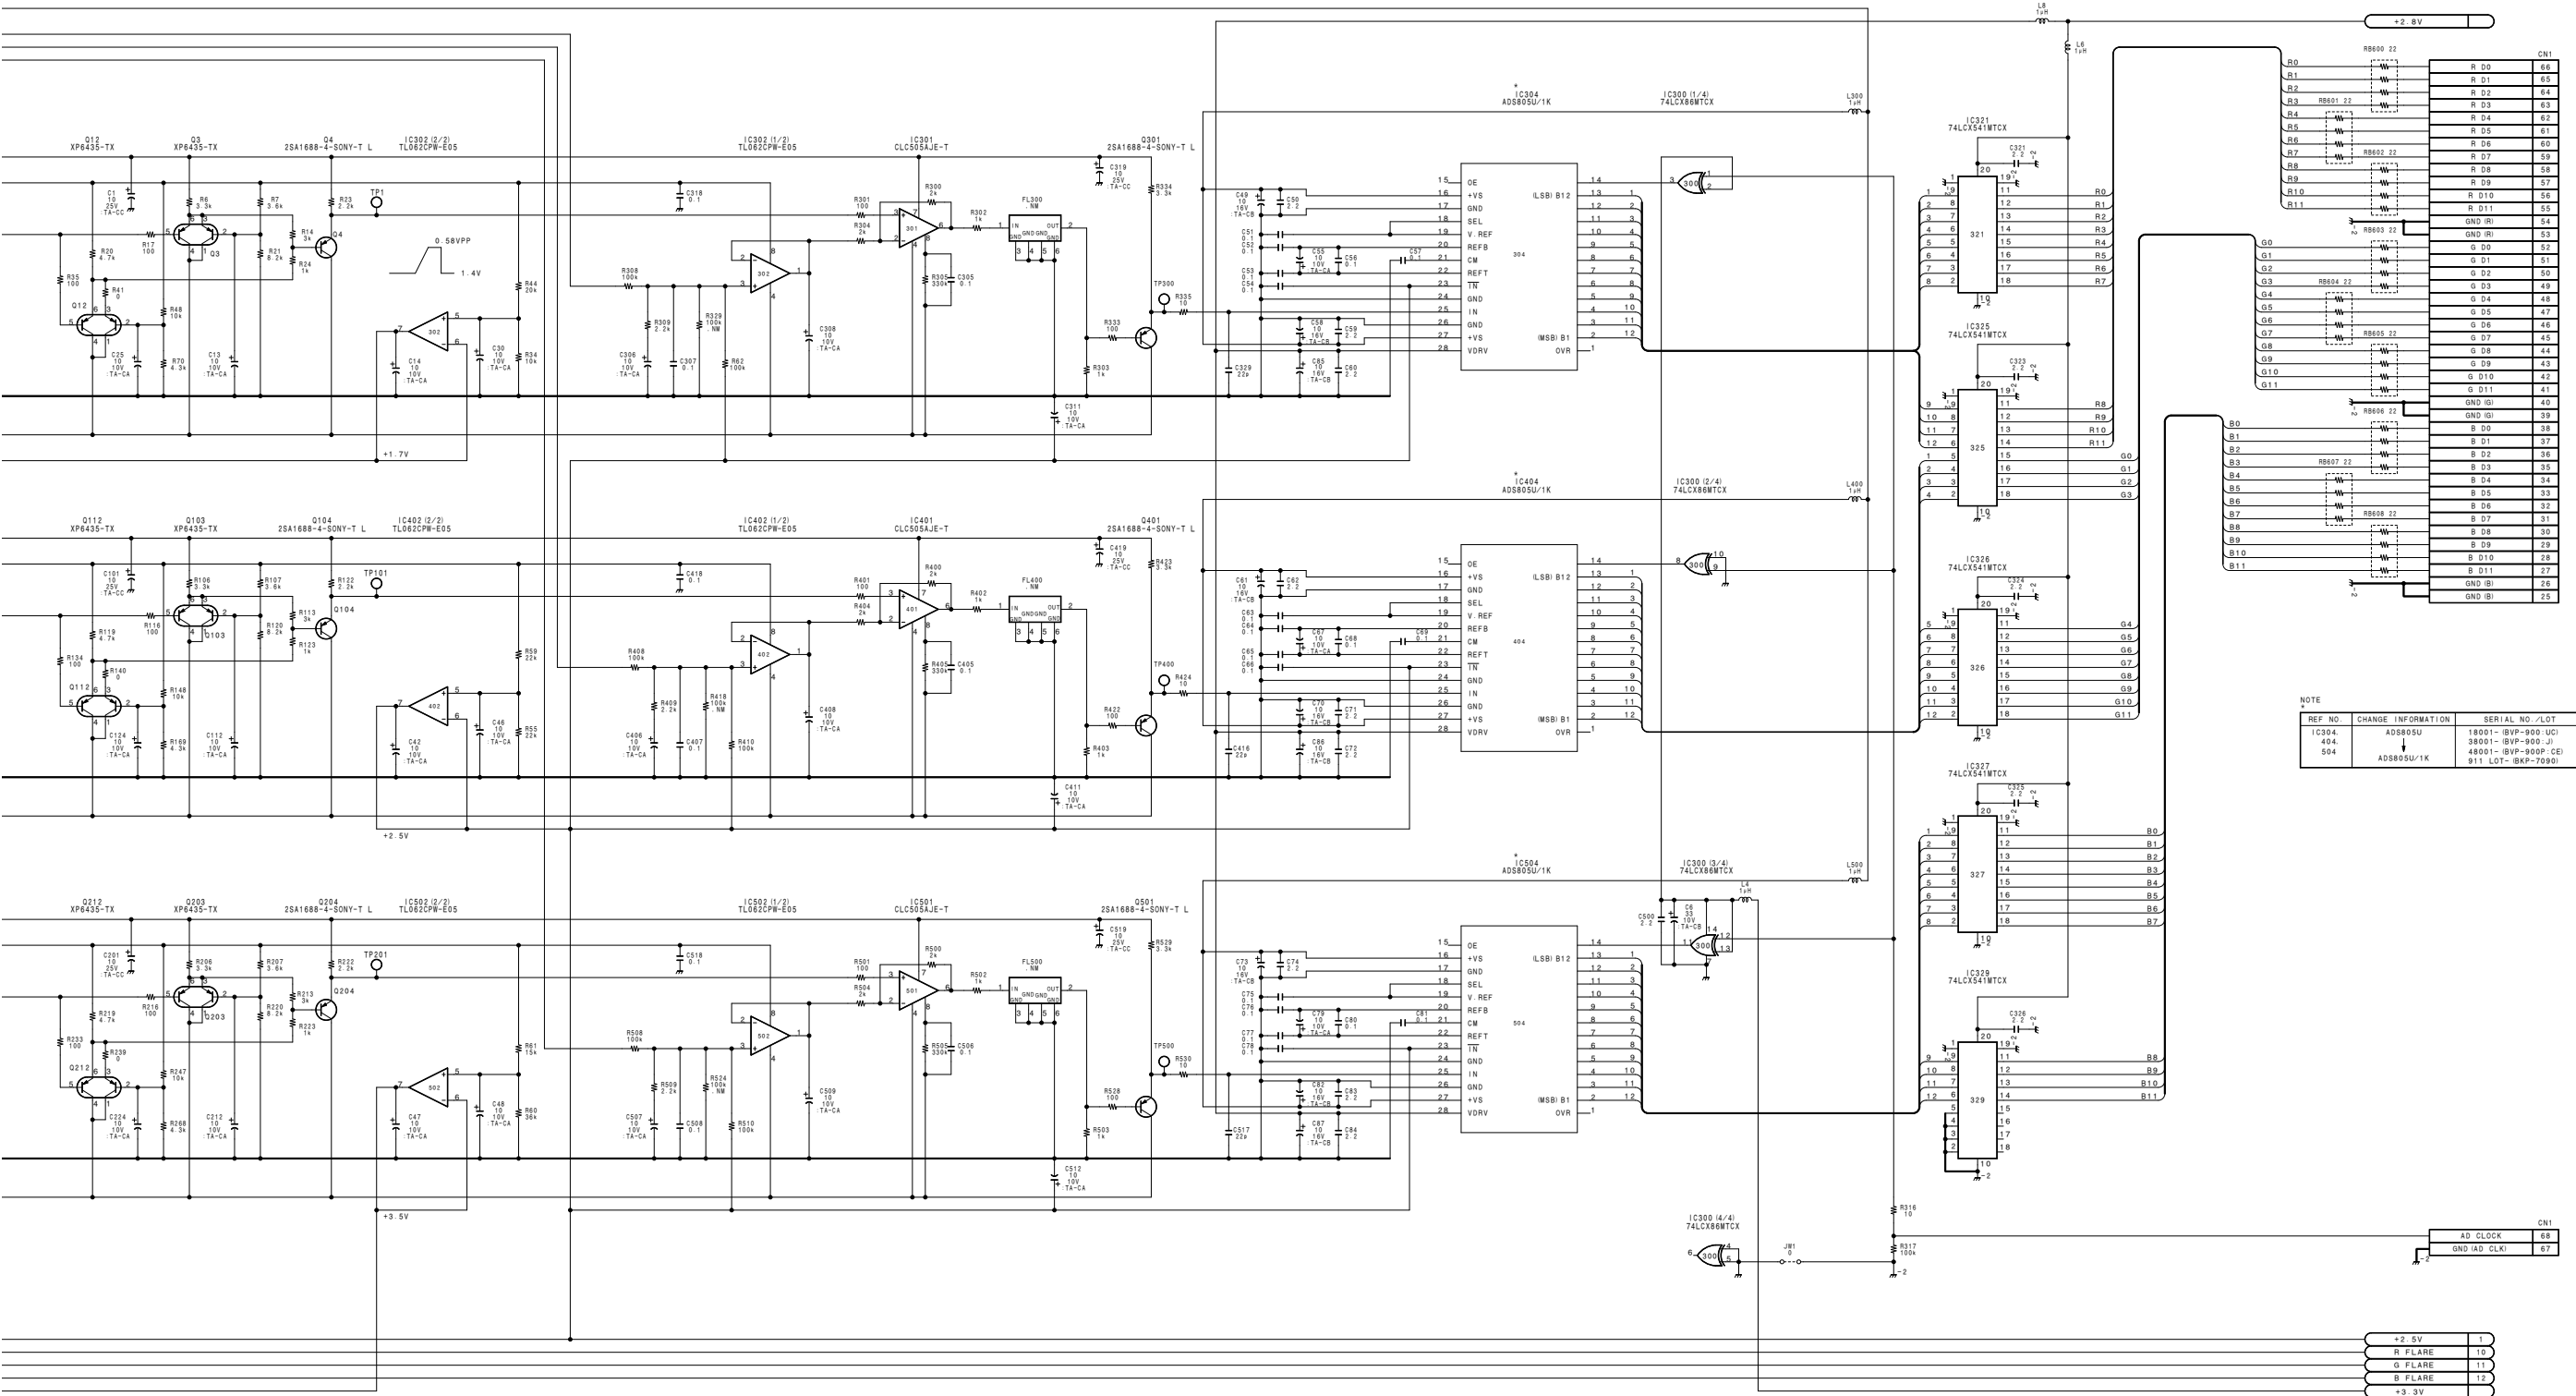


AD-148 (1/2)

BOARD NO. 1-667-971-12, 13
LOT NO. 709-
B-YBVP900-AD148-13@-M

BVP-900 (UC)
BVP-900 (J)
BVP-900P (CE)

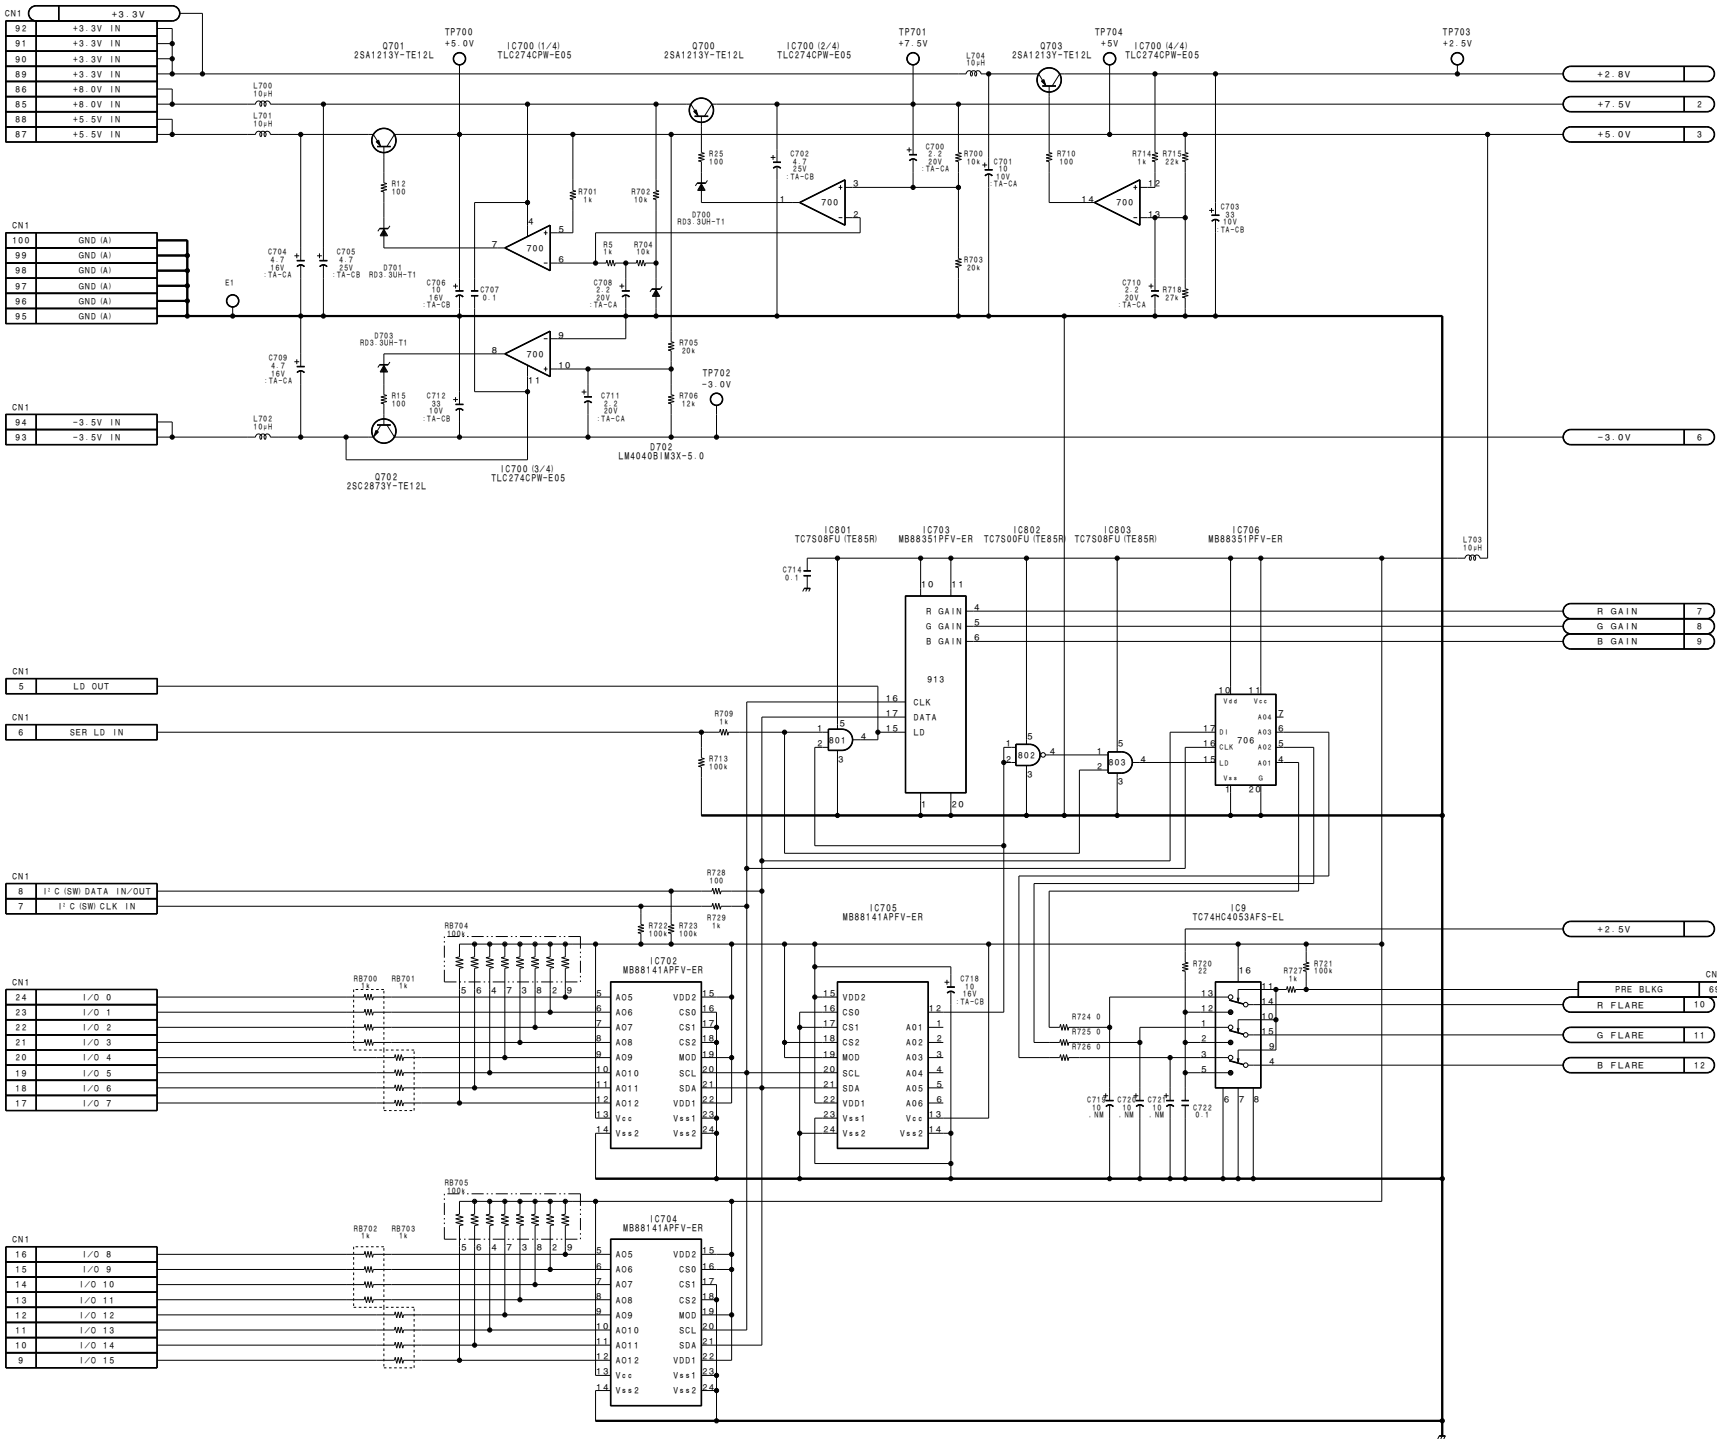

AD-148 (2/2)
BOARD NO. 1-667-971-12, 13
LOT NO. 709-
B-VBVP900-AD148-13@-M

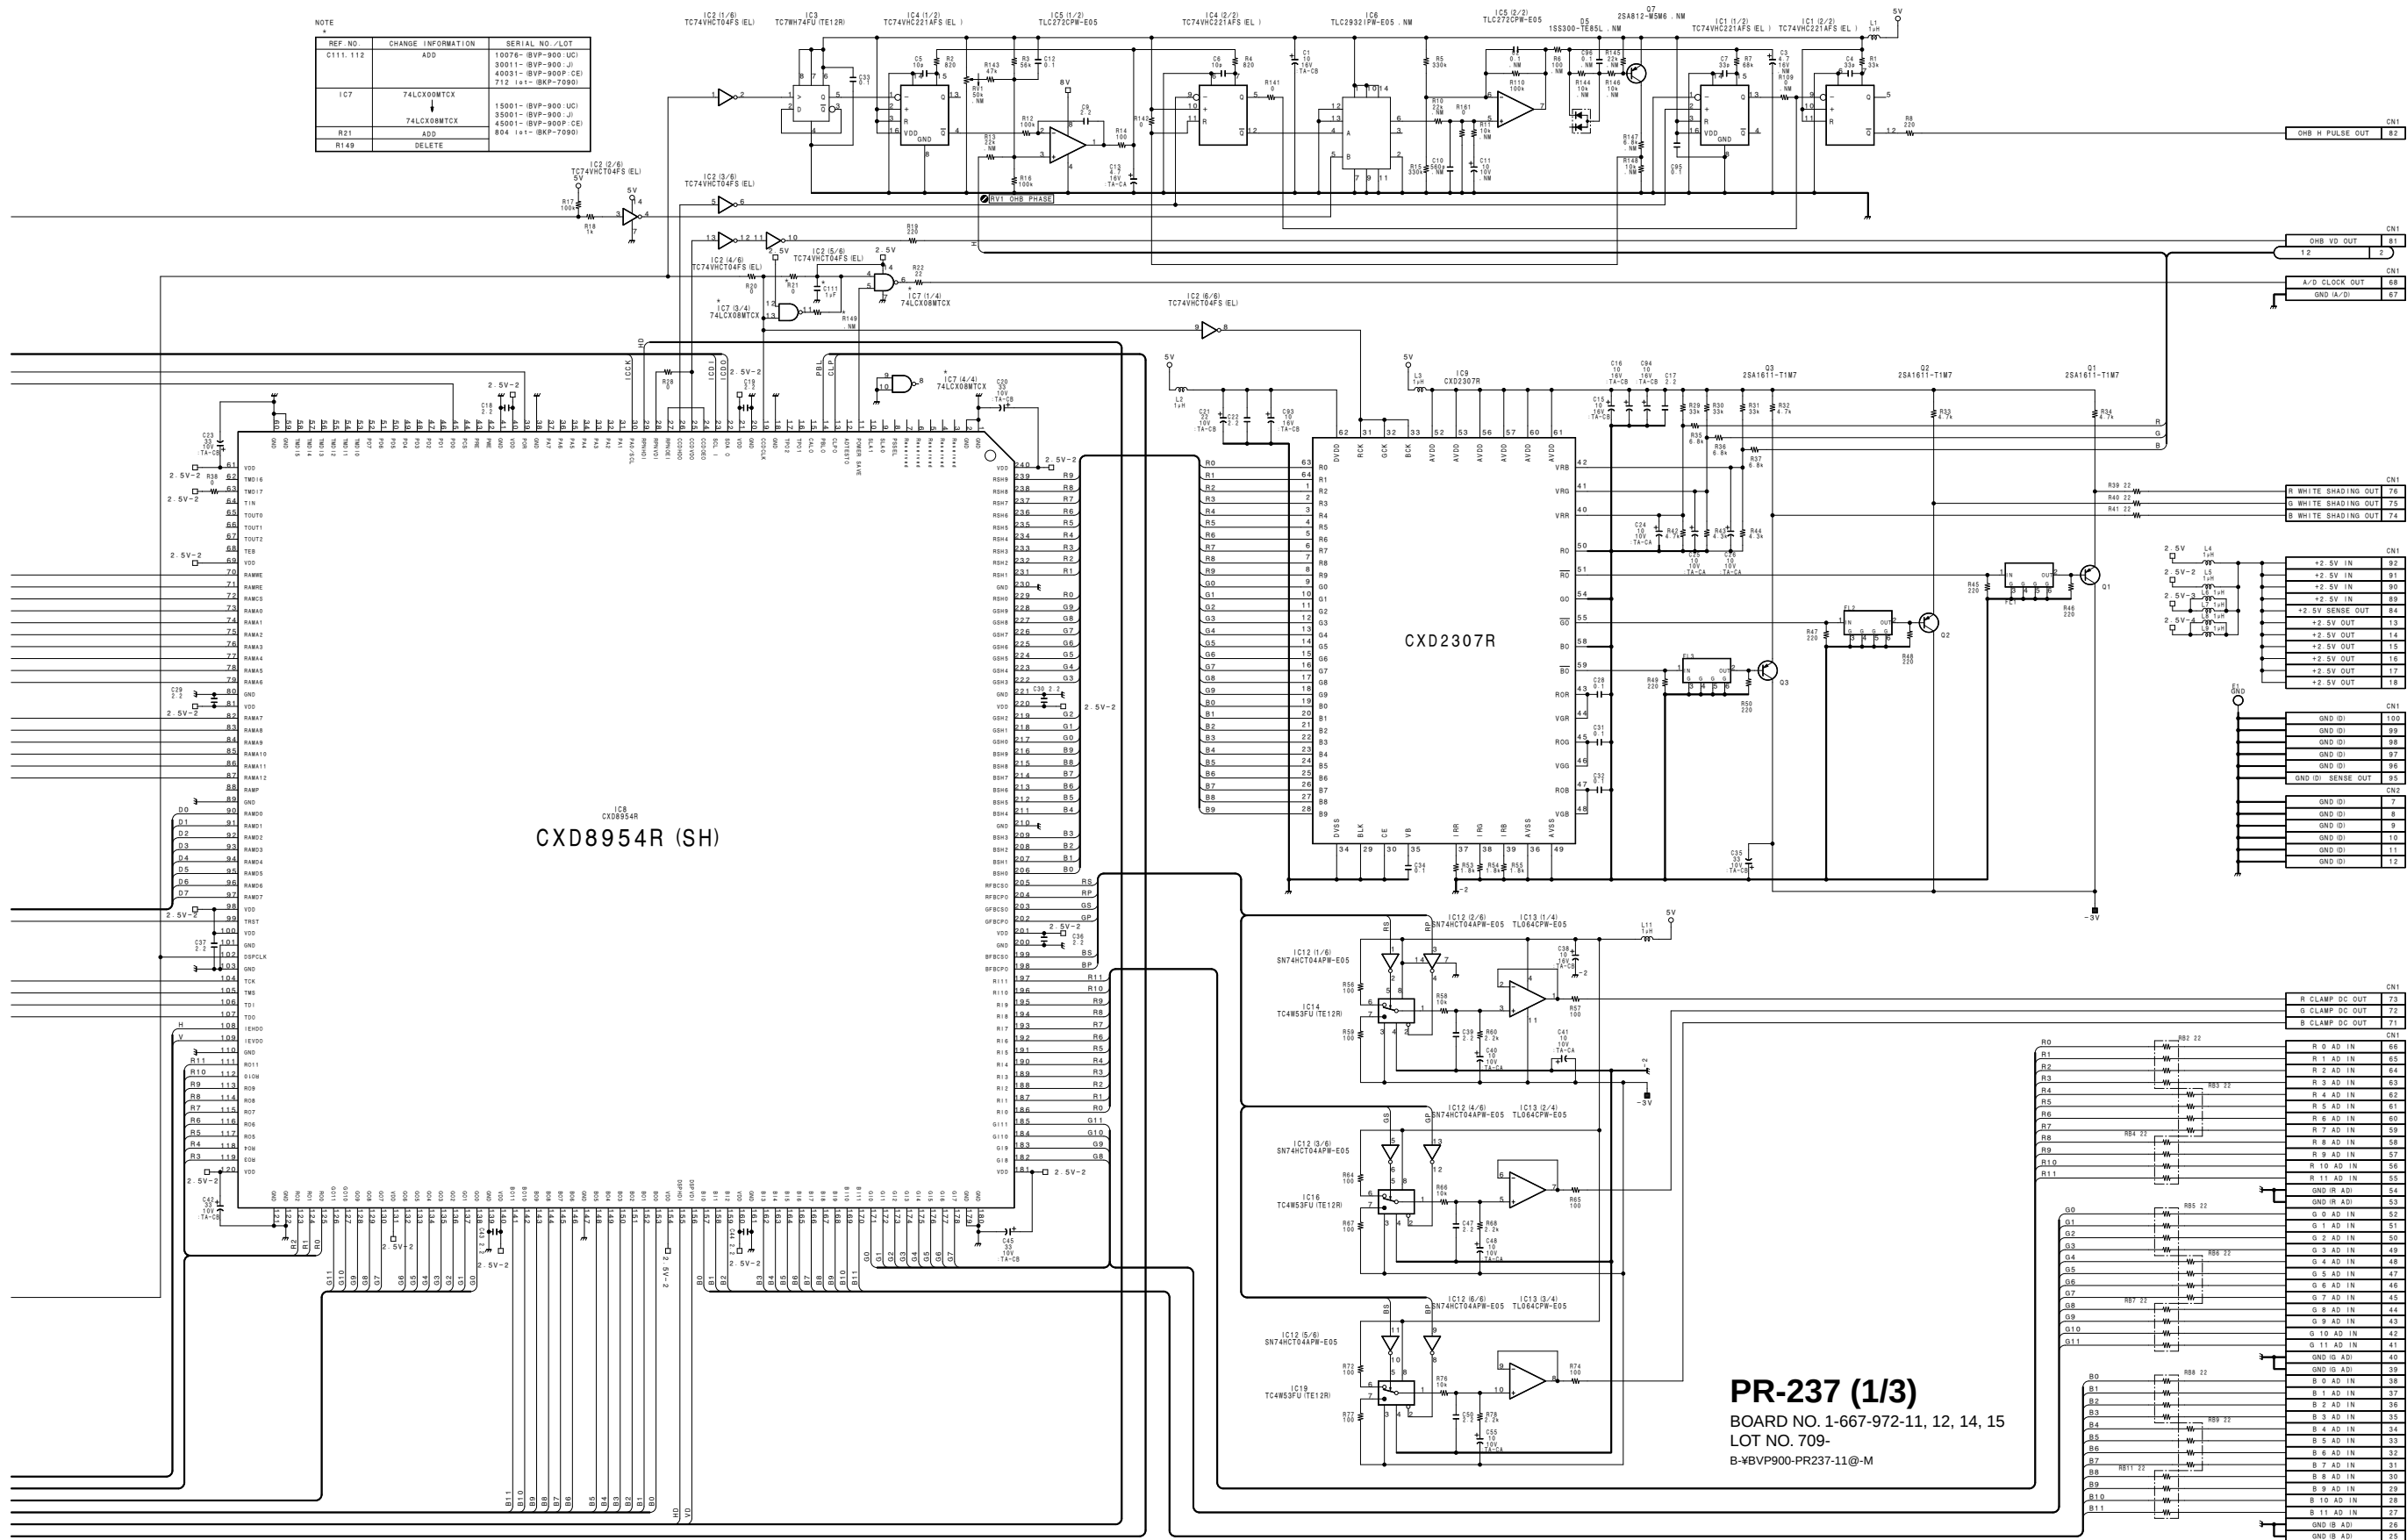


PR-237 (1/3)

BOARD NO. 1-667-972-11, 12, 14, 15
LOT NO. 709-
B-WBP900-PR237-11@-M

BVP-900 (UC)
BVP-900 (J)
BVP-900P (CE)

1

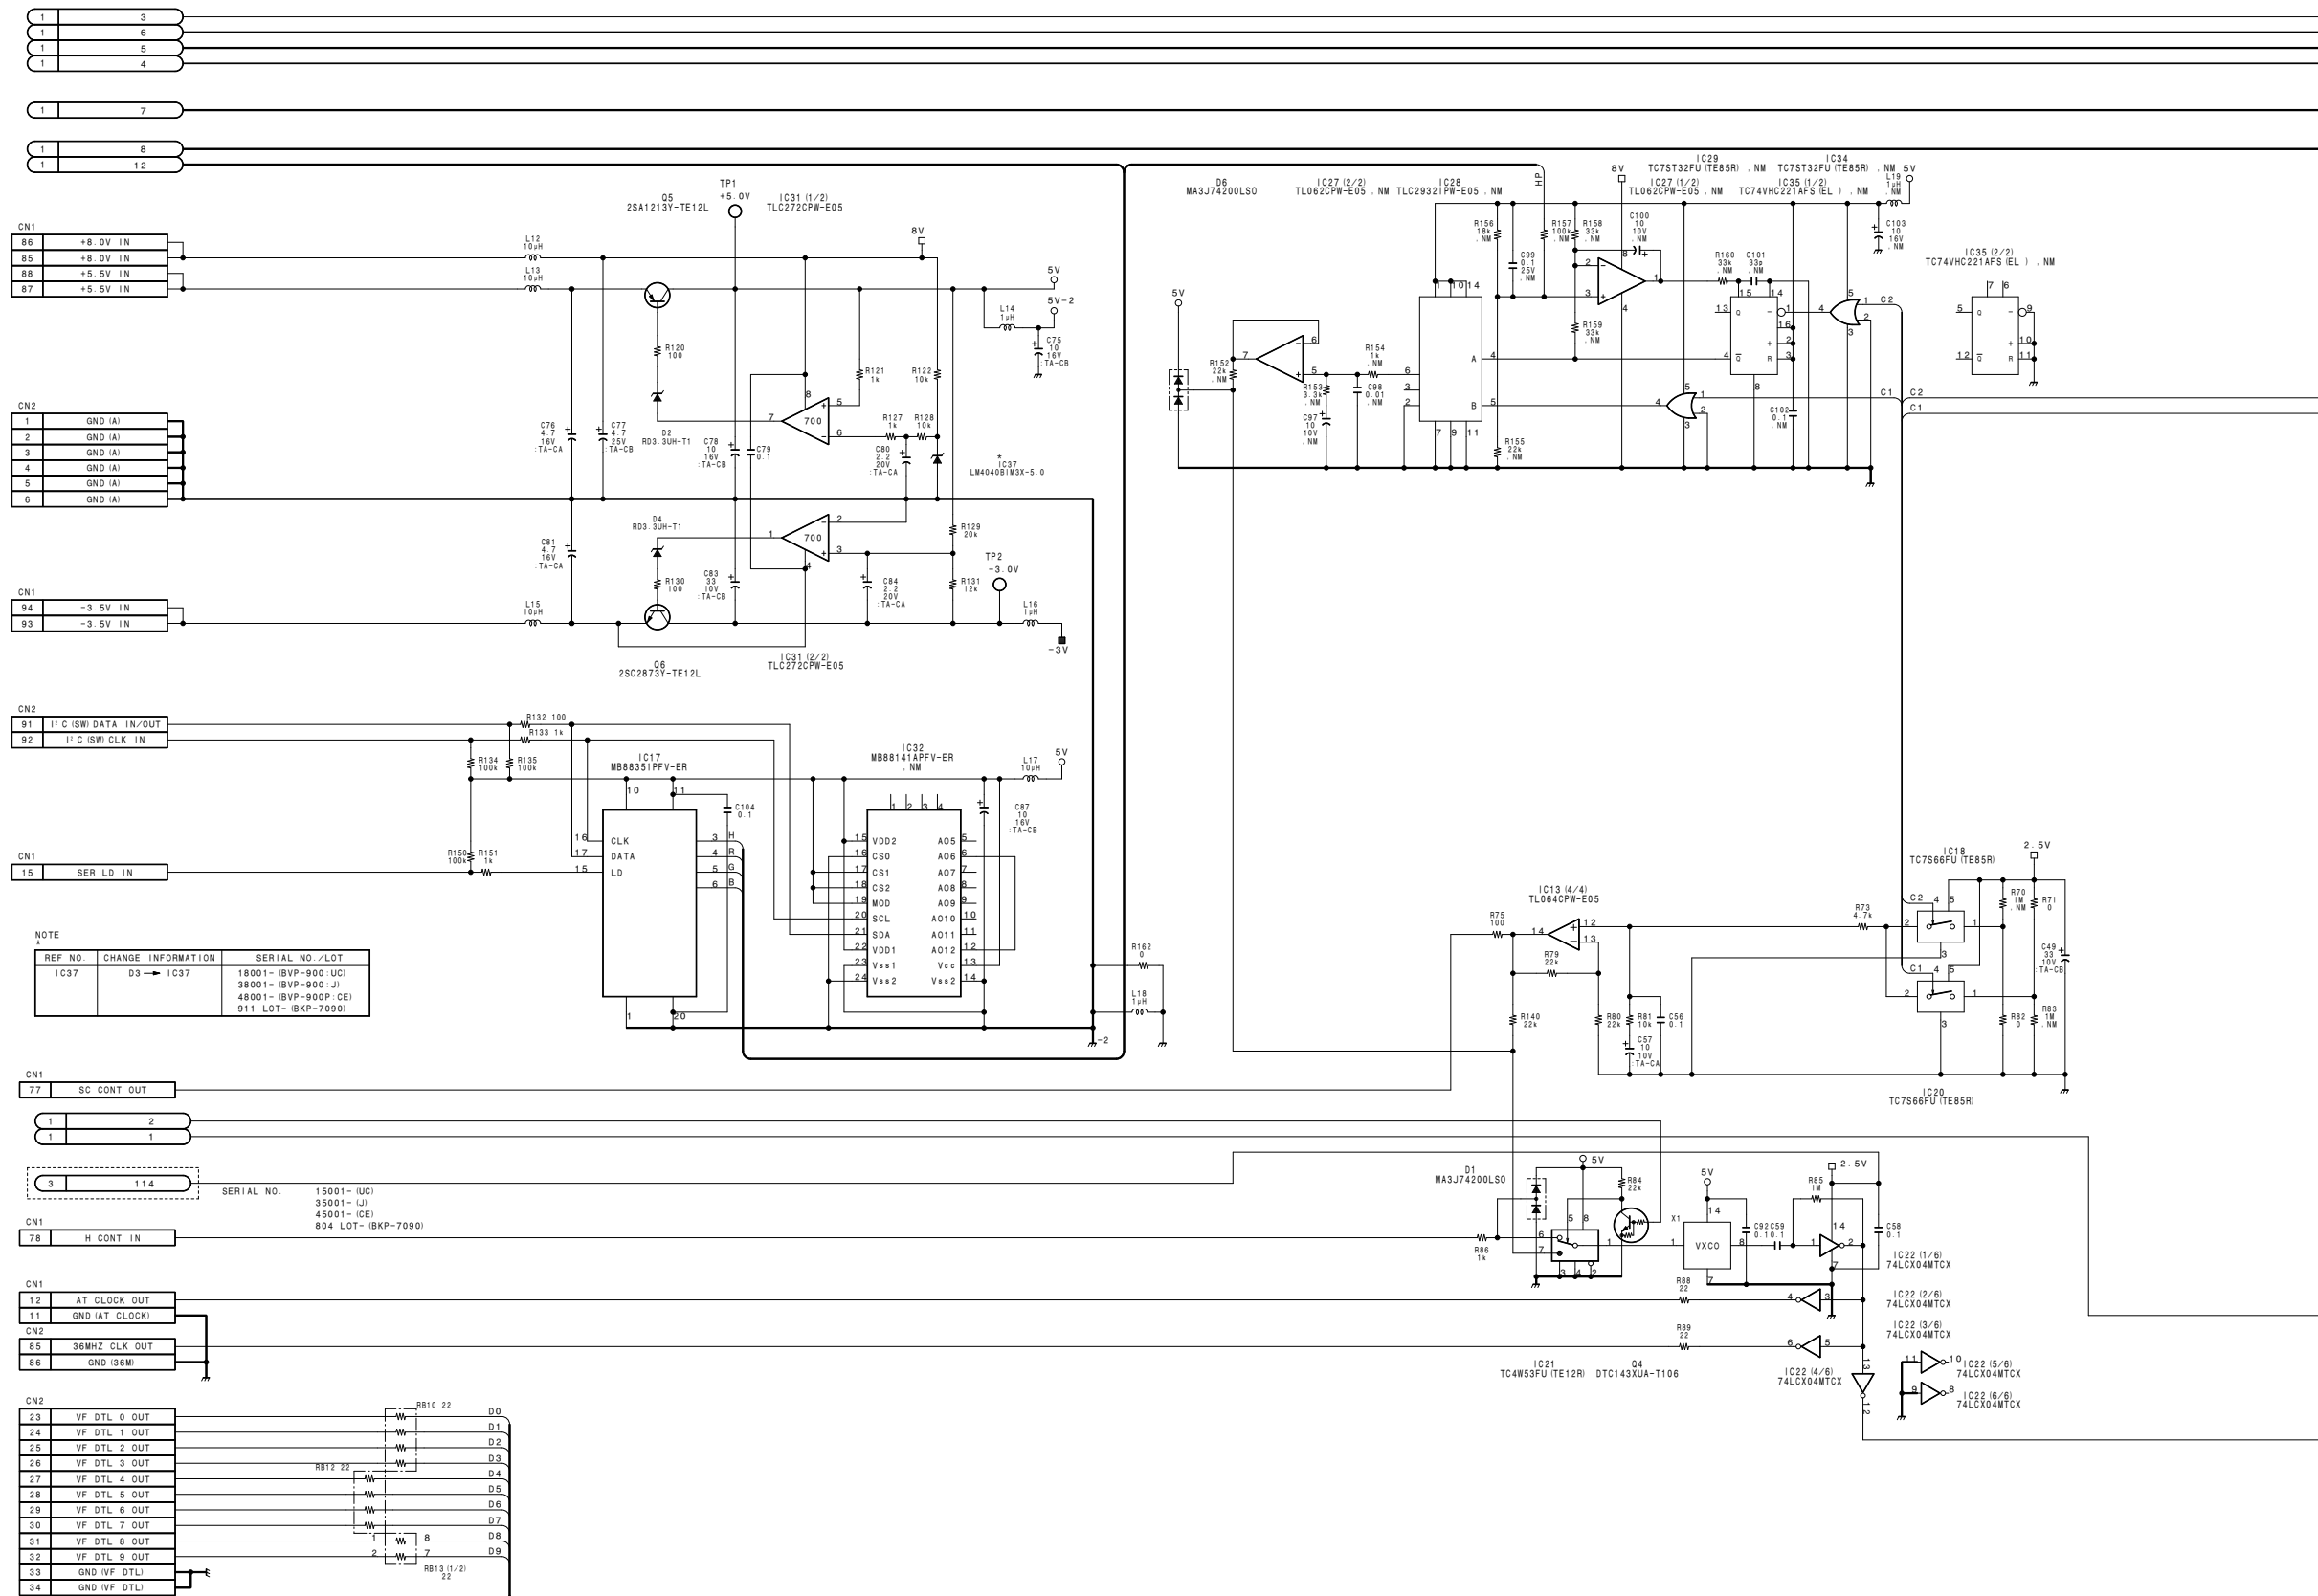

2

3

4

5

4-8

4-8

A

B

C


D

E

F

G

H



BVP-900 (UC)
BVP-900 (J)
BVP-900P (CE)


1

2


3

4

5

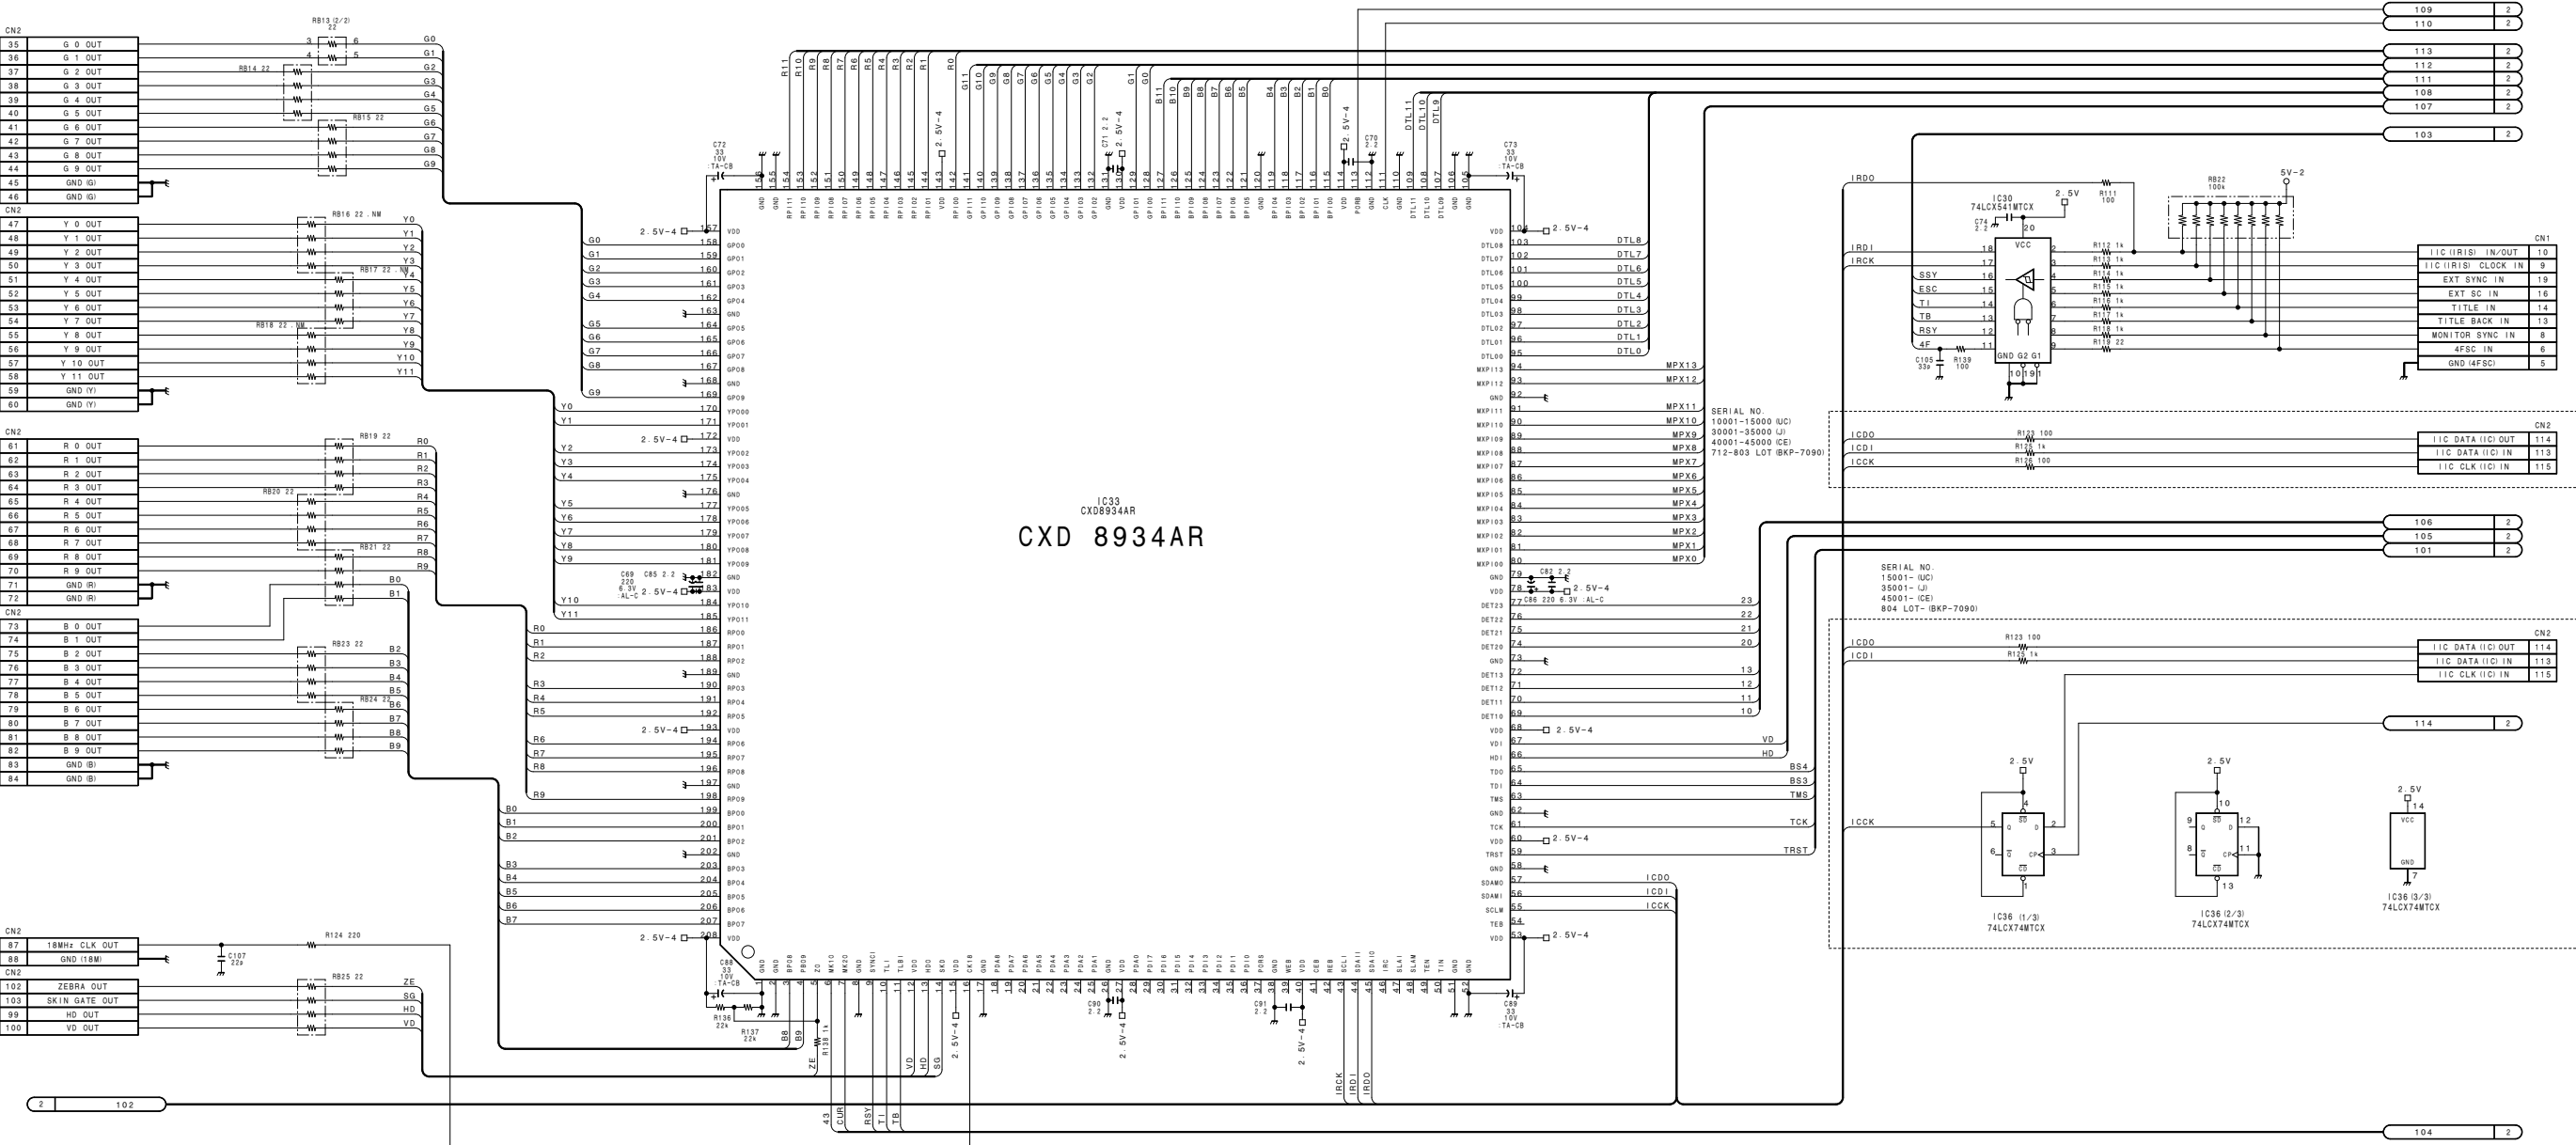



BVP-900 (UC)
BVP-900 (J)
BVP-900P (CE)

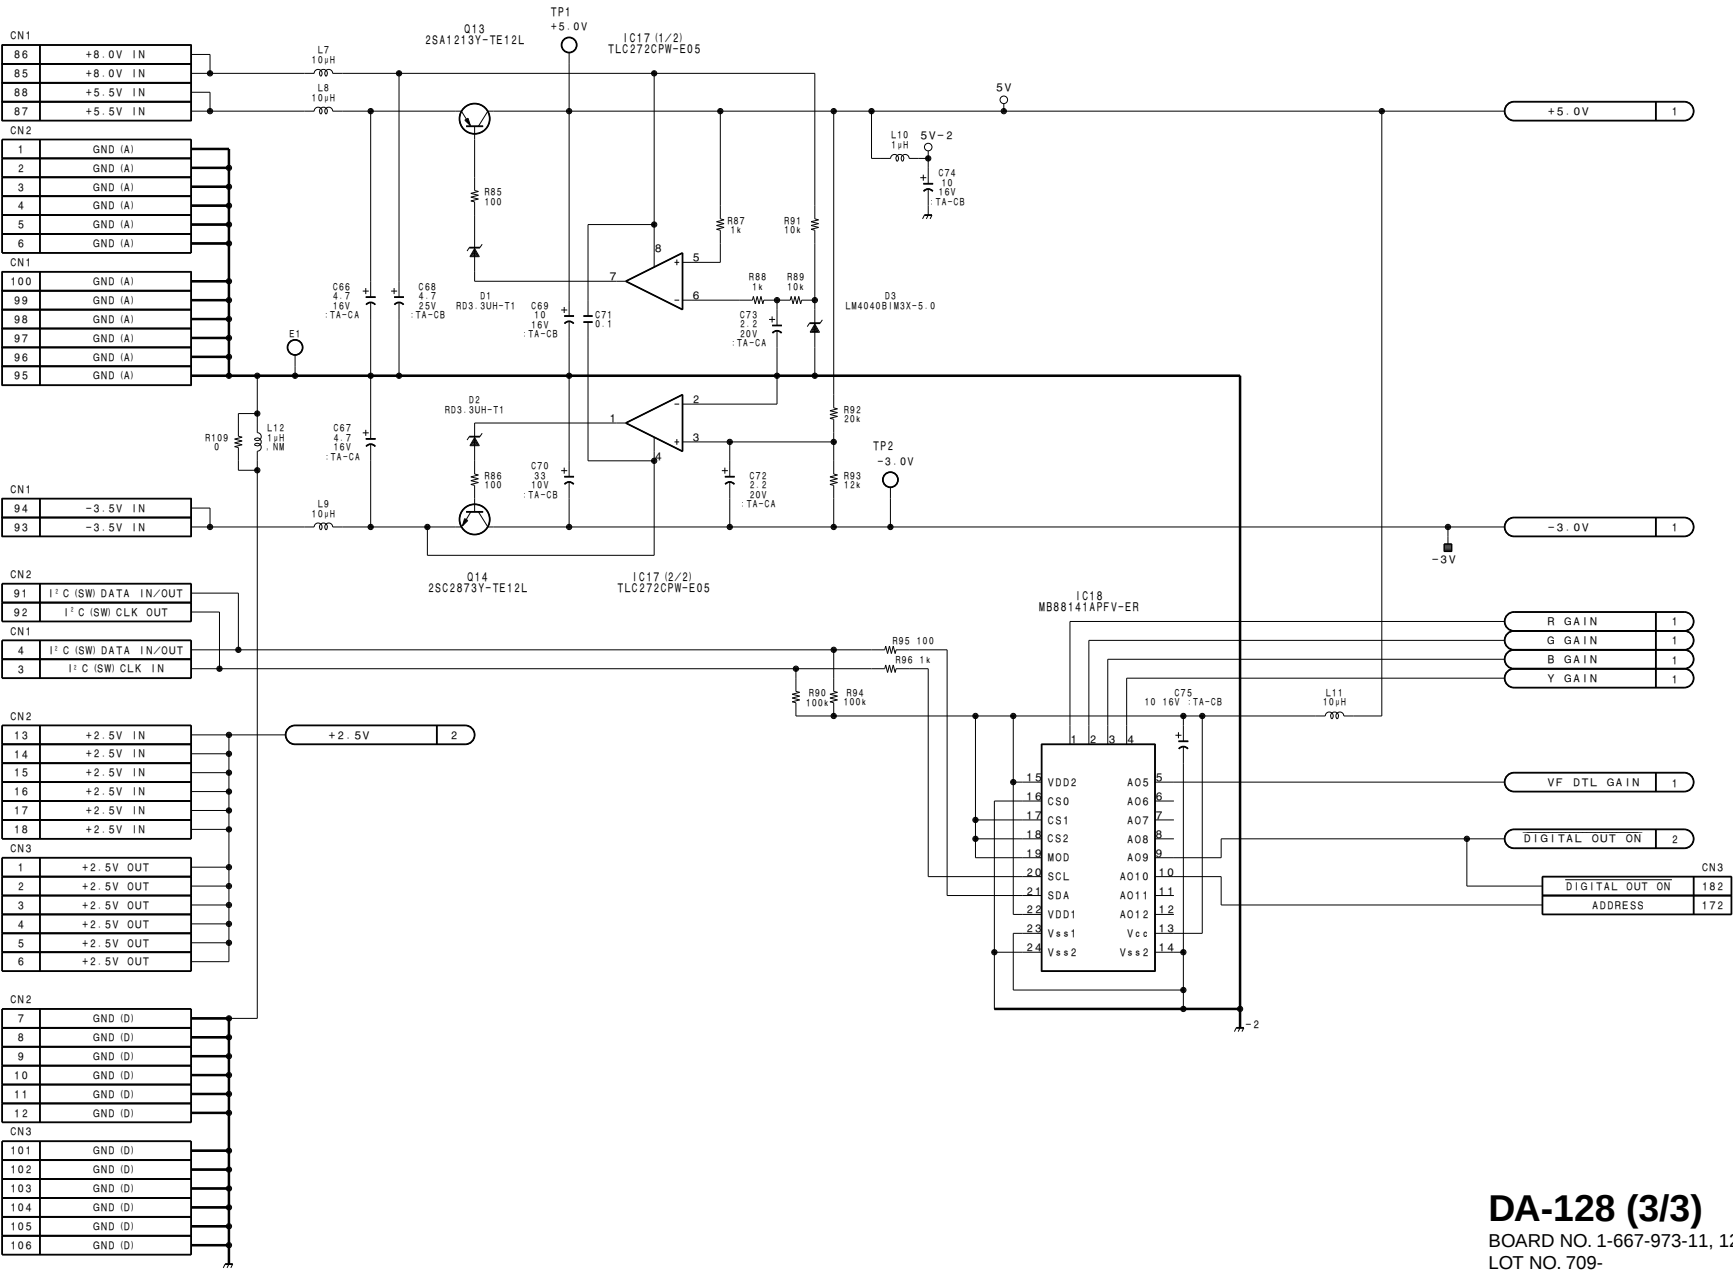


DA-128 (3/3)
BOARD NO. 1-667-973-11, 12
LOT NO. 709-
B-VBVP900-DA128-12@

BVP-900 (UC)
BVP-900 (J)
BVP-900P (CE)


MS-57 CN1		
Pin	I/O	Destinations
1	I	DA, 1-1
2	I	DA, 1-2
3	I	AT-120, 1-57
4	I	AT-120, 1-54
5	I	AT-120, 1-53
7	I	PR, 1-2
9	O	AT-120, 1-6
10	O	AT-120, 1-5
		PR, 1-8
11	I	AT-120, 1-19
12	I	AT-120, 1-12
13	I/O	AT-120, 1-20
		DA, 1-4
		AD, 1-8
14	I	AT-120, 1-11
15	O	PS-351, 10-16
16	I	PR, 1-7
17	O	PR, 1-1
18	I	DA, 1-13
19	I	PR, 1-21
20	I	MB, 15-A9
22	I	DA, 1-68
23	O	MB, 15-A8
24	O	LENS, 12-A1
25	O	PS-492, 1-29
26	O	LE41-2
27	O	PS-492, 1-30
28	O	PS-492, 1-31
29	O	VF, 23-B6
30	O	VF, 23-A6
34	I	DA, 1-72
36	I	AT-73, 47-17
44	O	CN-1689, 44-A1
46	O	CN-1690, 45-A12
48	I	DA, 1-74
50	I	DA, 1-77
52	I	DA, 1-80
56	I	EN, 1-58
60	O	VF, 23-A4
62	O	VF, 23-A3
64	O	VF, 23-A2
68	O	VF, 23-A8
72	I	MB, 15-A7
74	I	DM, 33-A1
75	O	VF, 23-B10
76	O	VF, 23-A10
77	I	VF, 23-A1
78	O	VF, 23-B1
79		AT-73, 47-21
80		AT-73, 47-20
81		AT-73, 47-19
82		AT-73, 47-18
84		AT-120, 1-78
		LENS, 12-B9
86	O	OHB, 24-B10
		EN, 1-86
		MD, 1-86
87	I	PR, 1-22

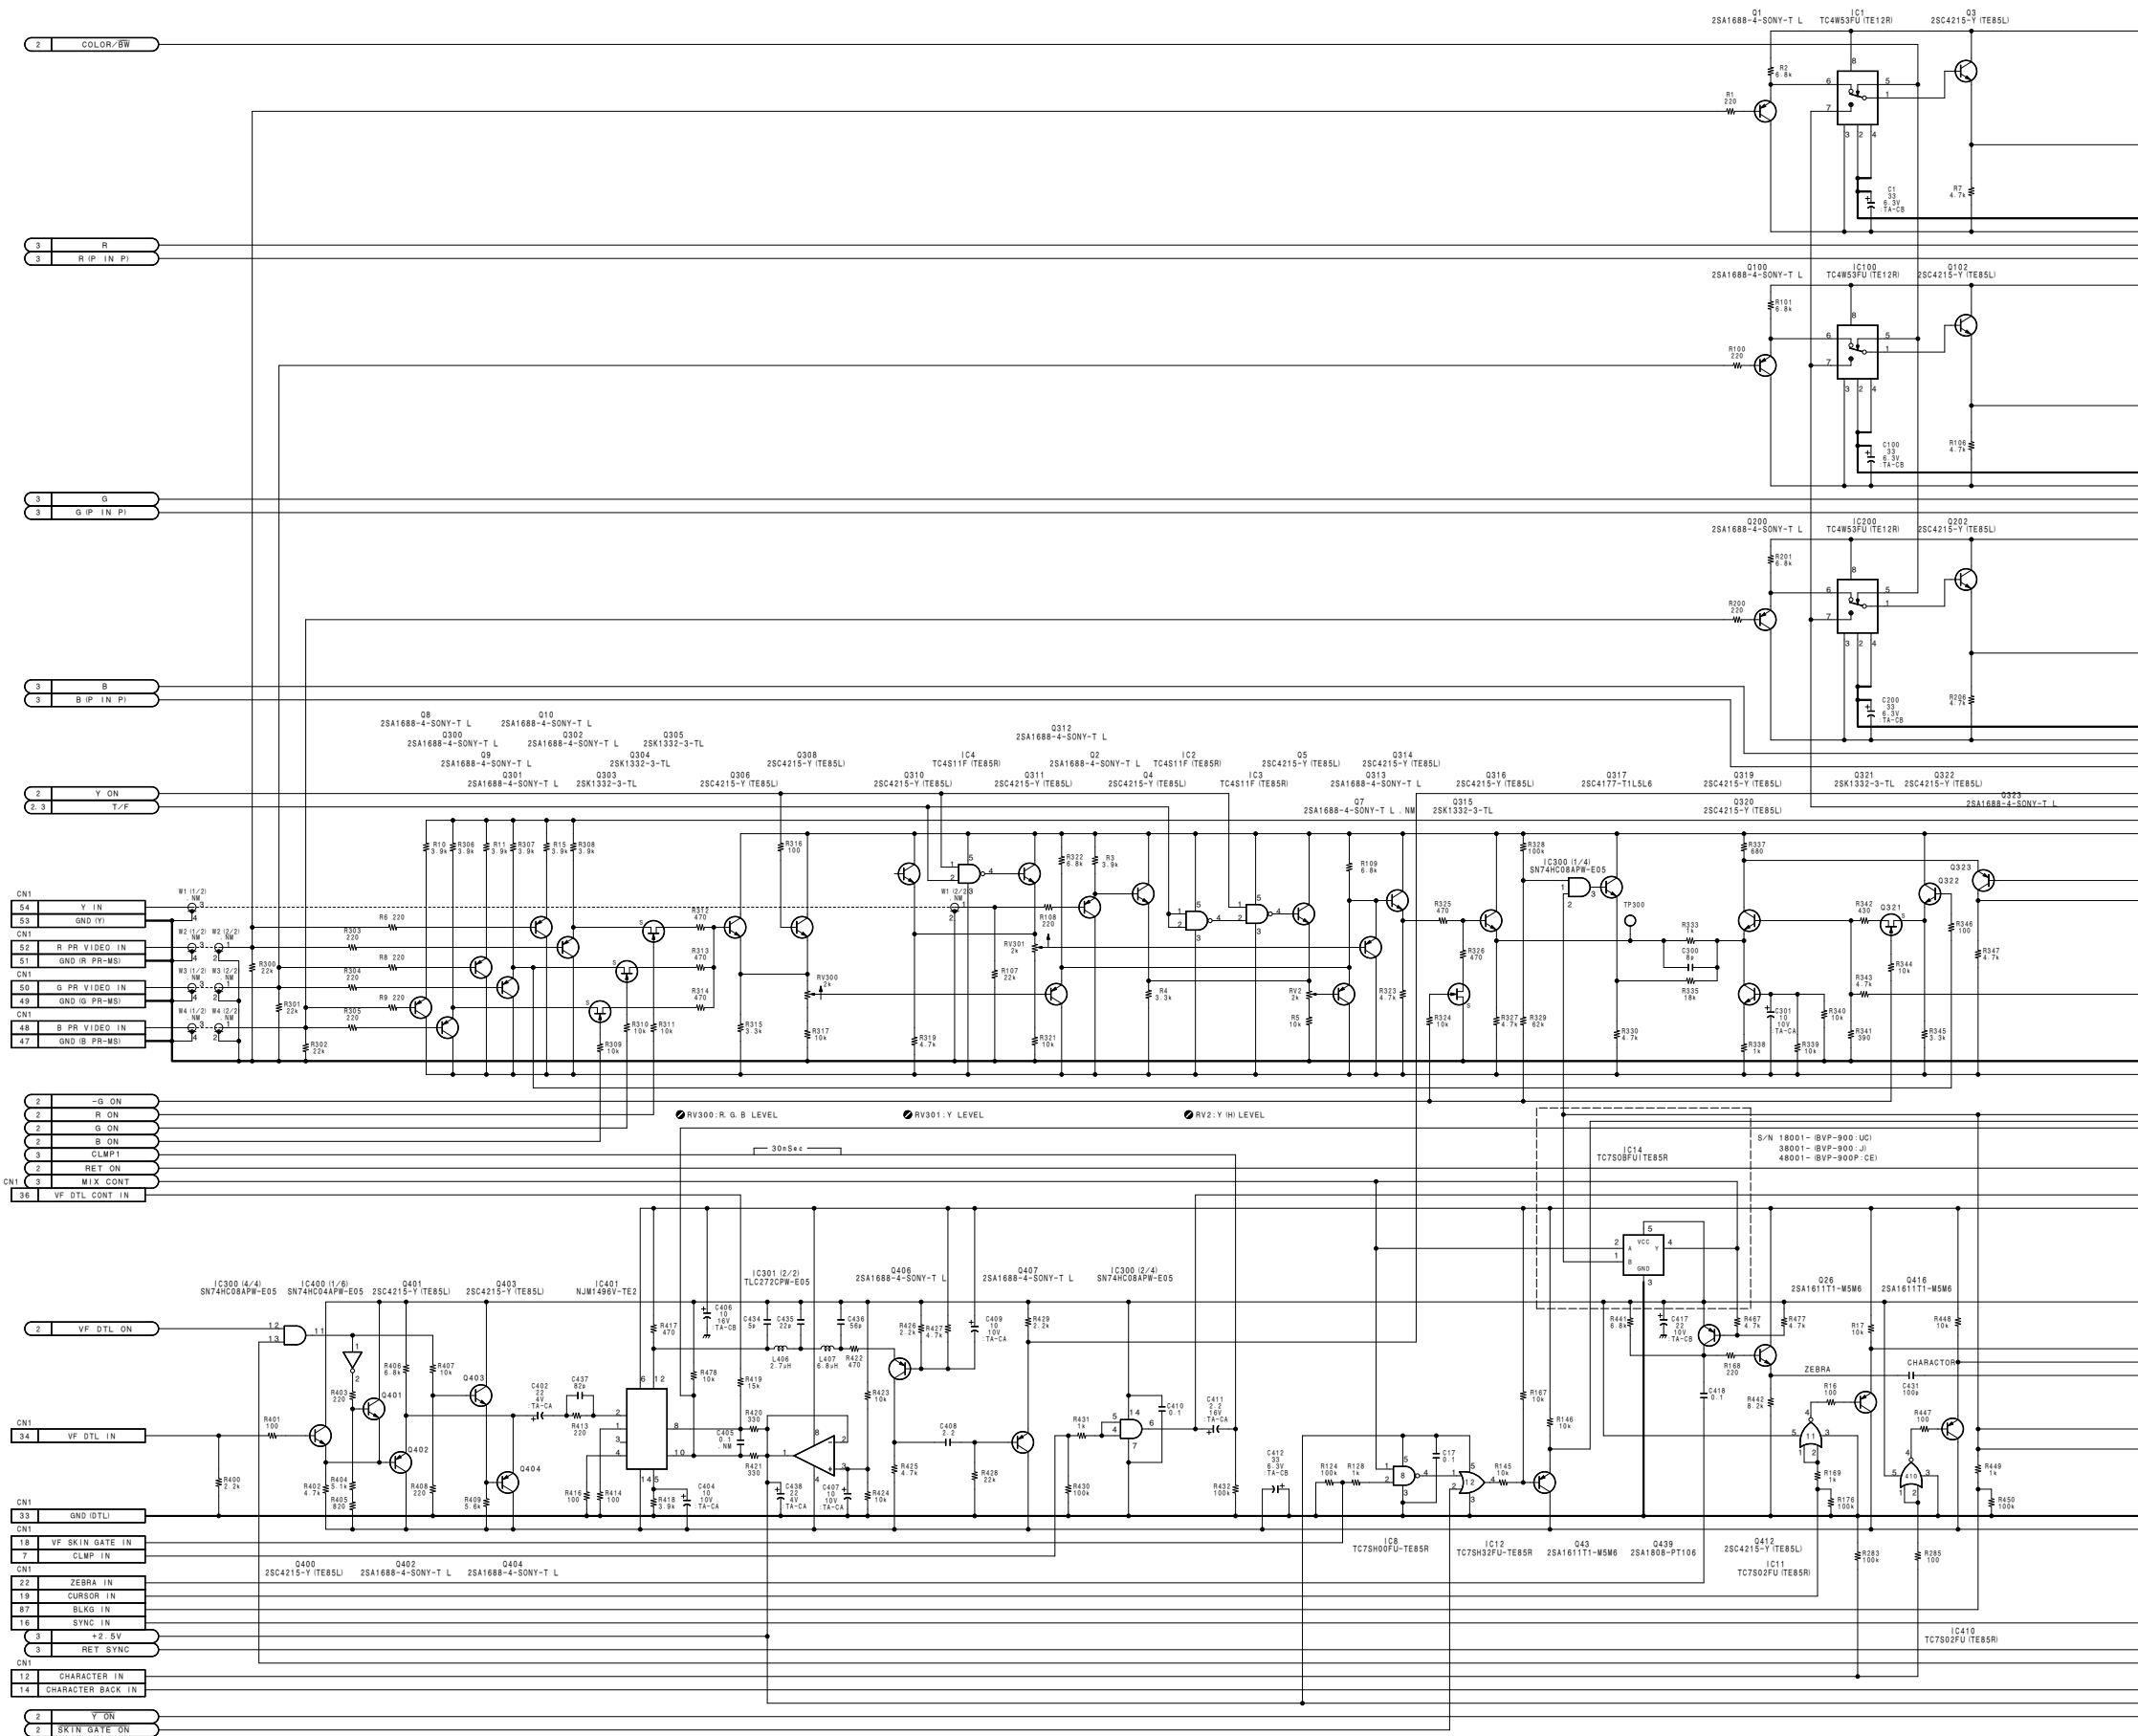


上記以外のコネクタの接続先については、FRAME WIRING (4-46 ページ) を参照。
Refer to FRAME WIRING (Page 4-46) in regard to destinations of connectors other than above.

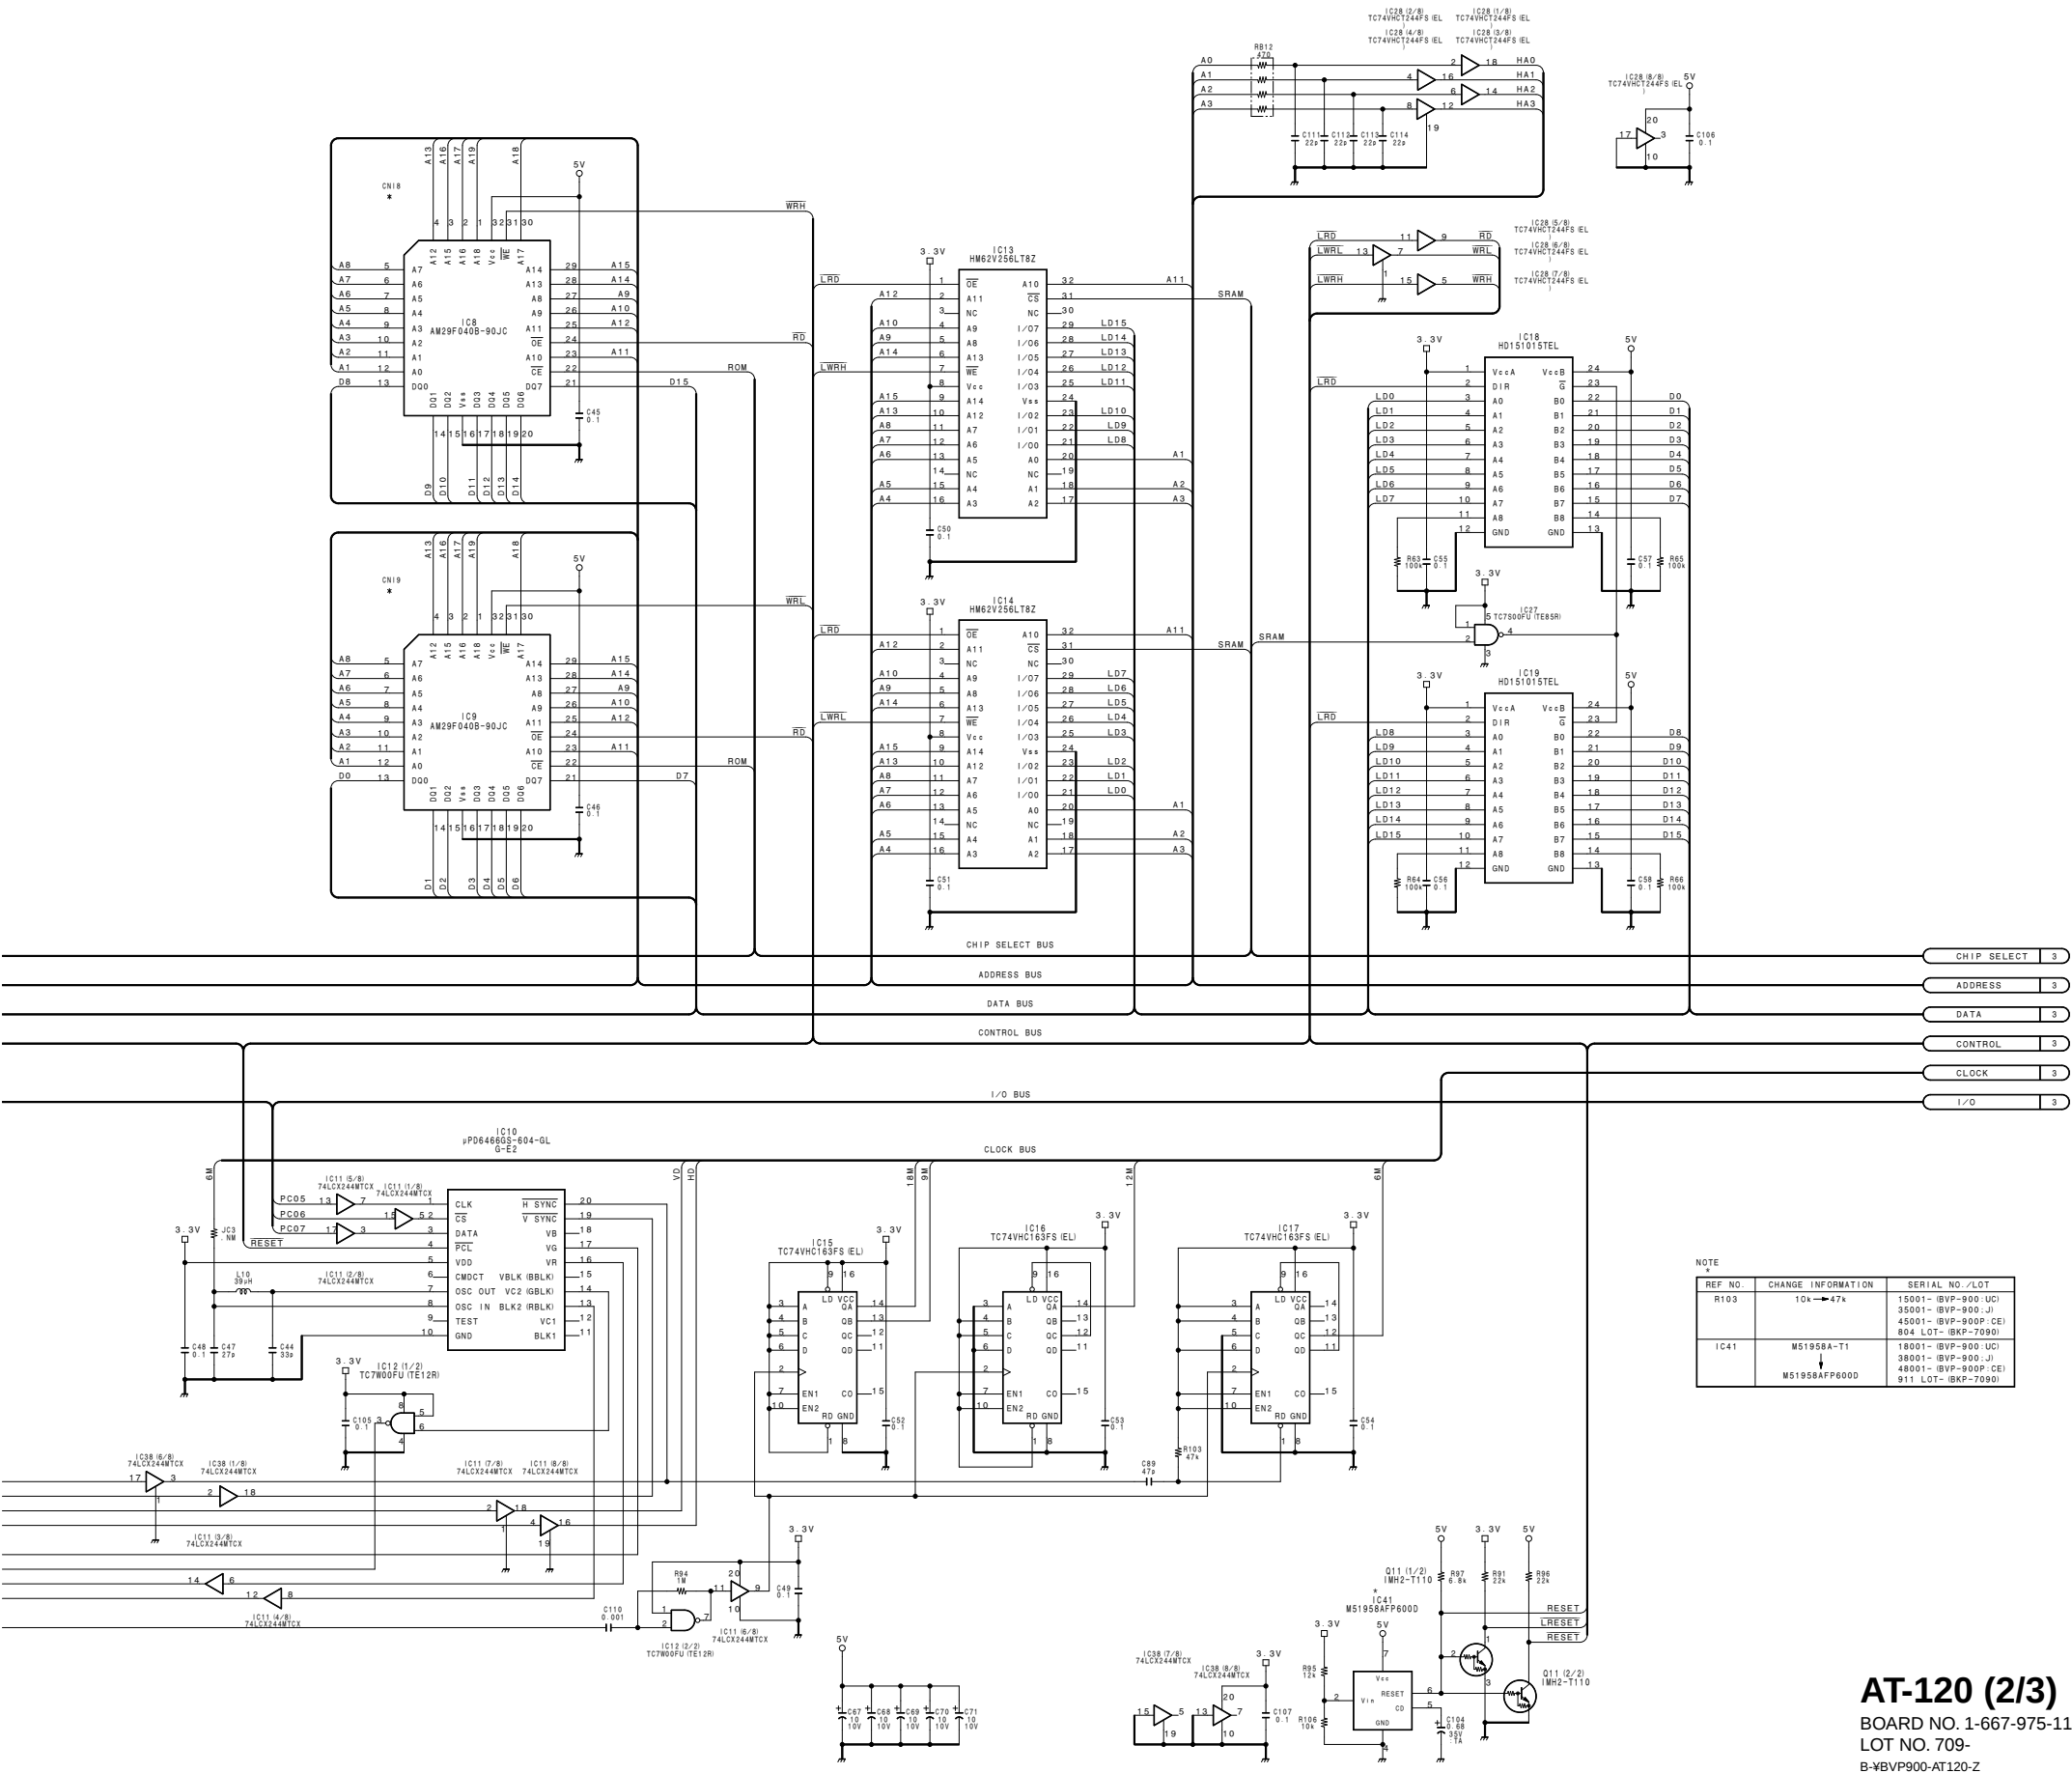

BVP-900 (UC)
BVP-900 (J)
BVP-900P (CE)

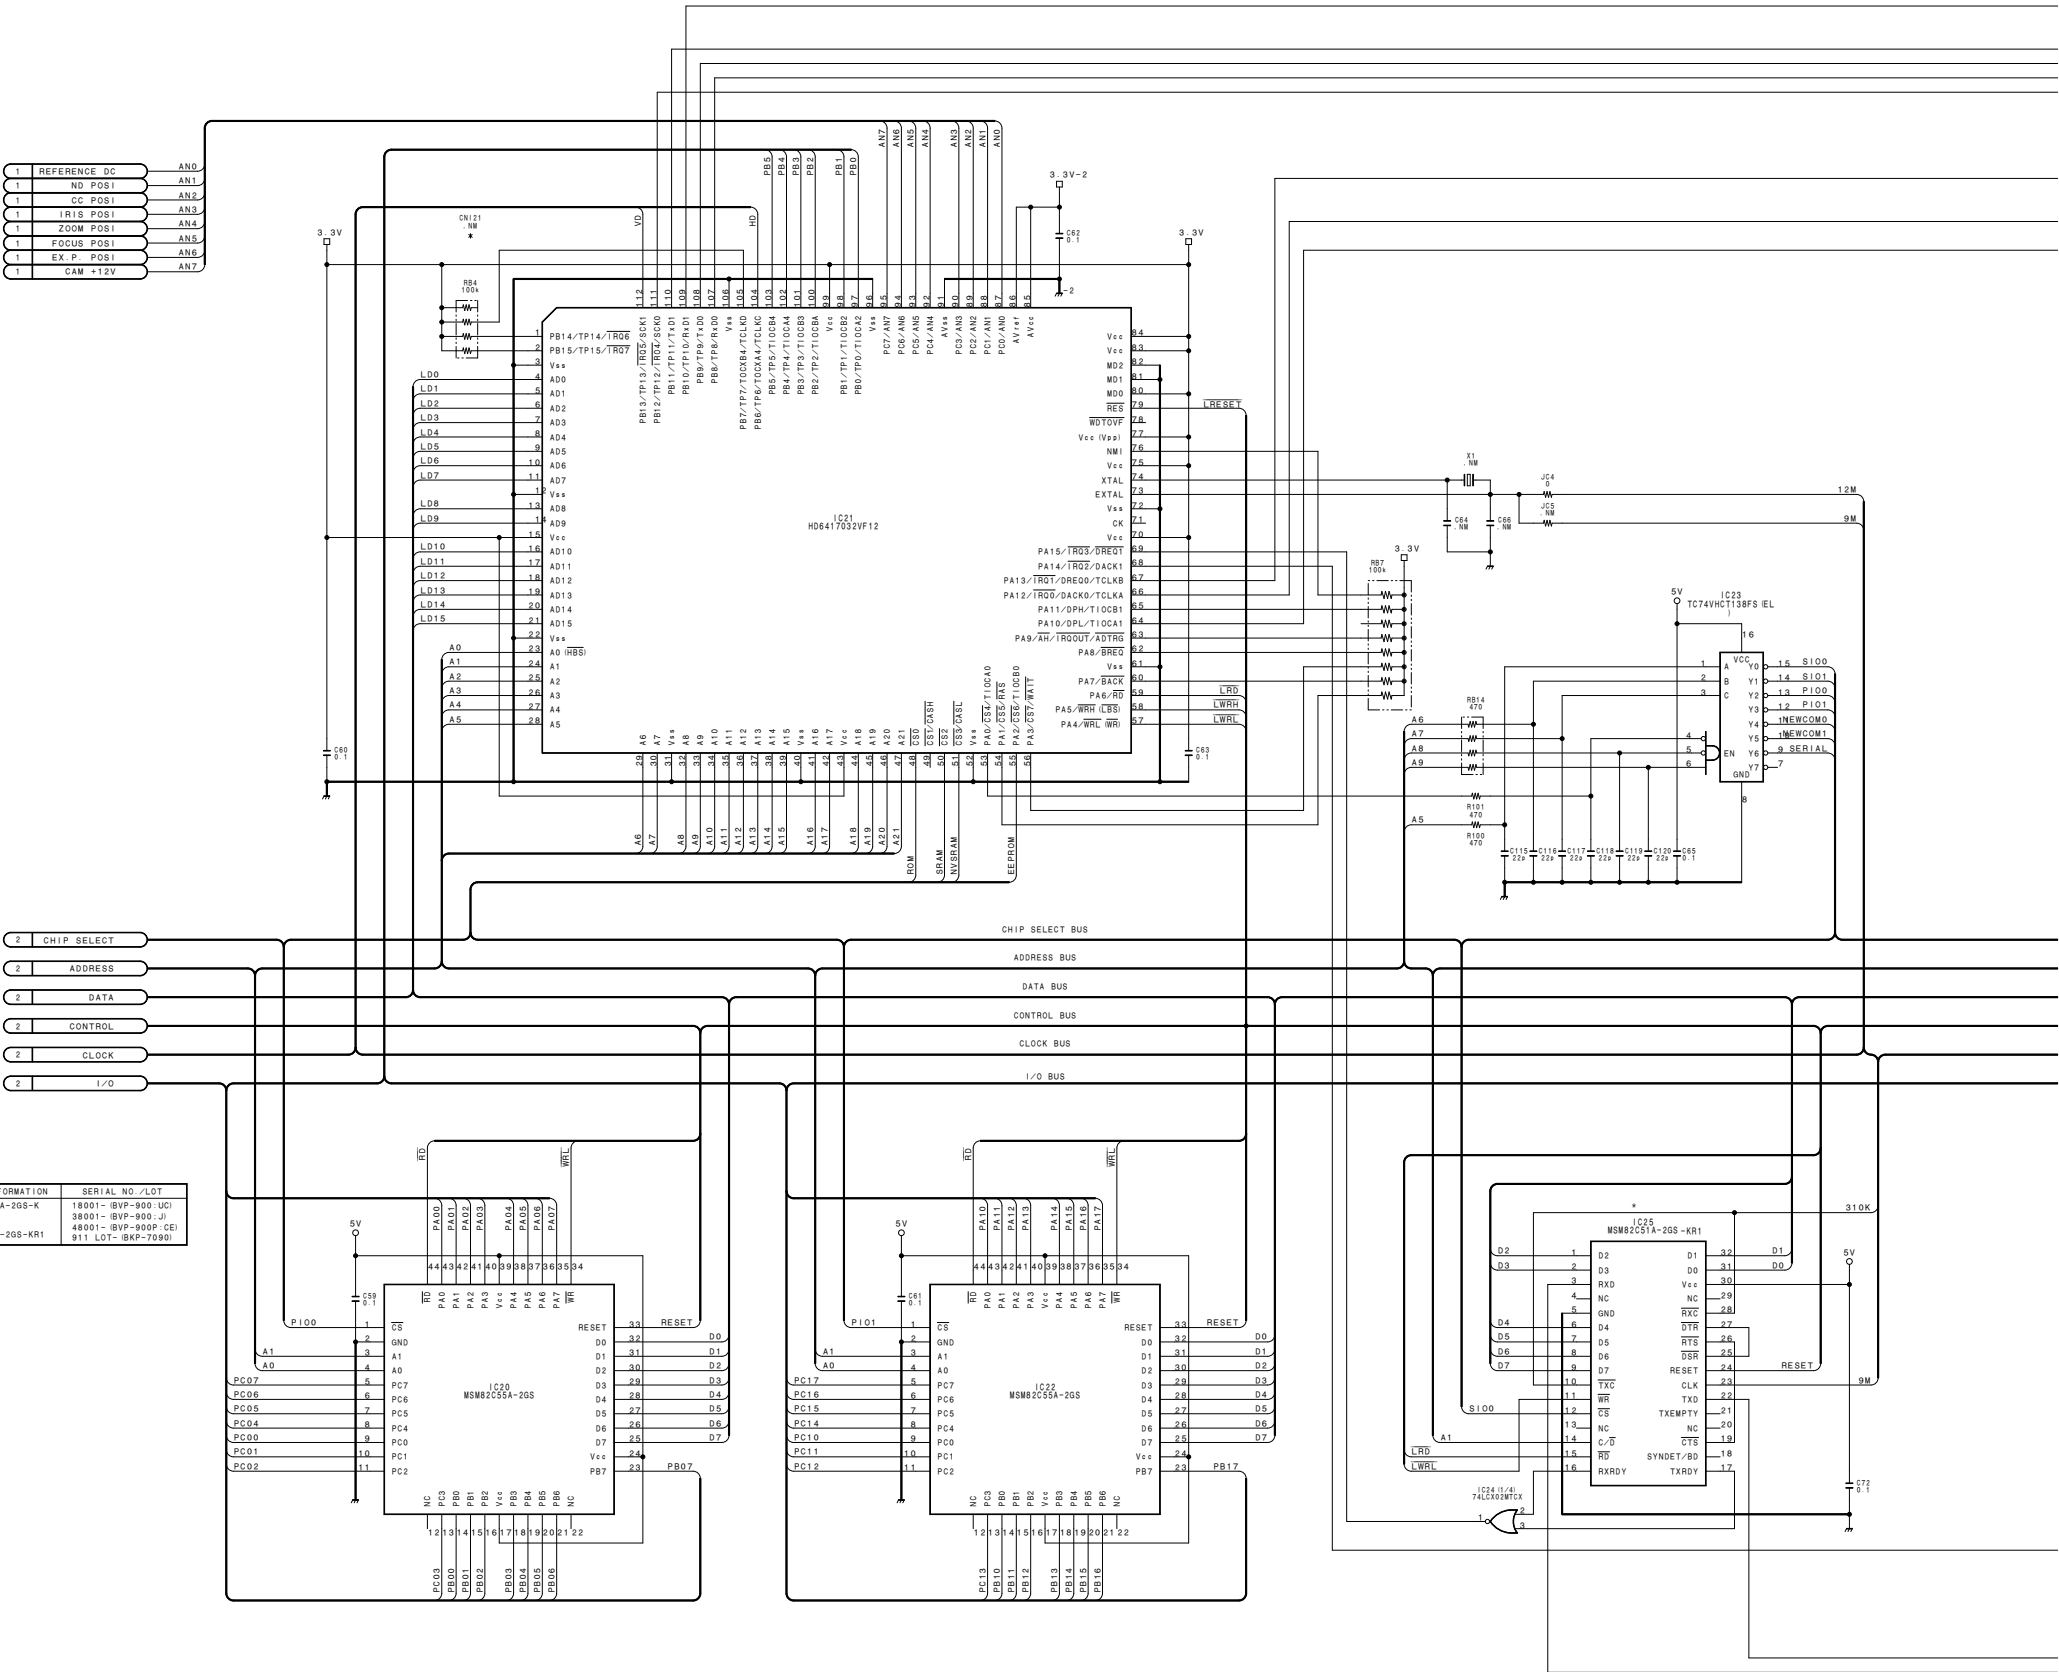


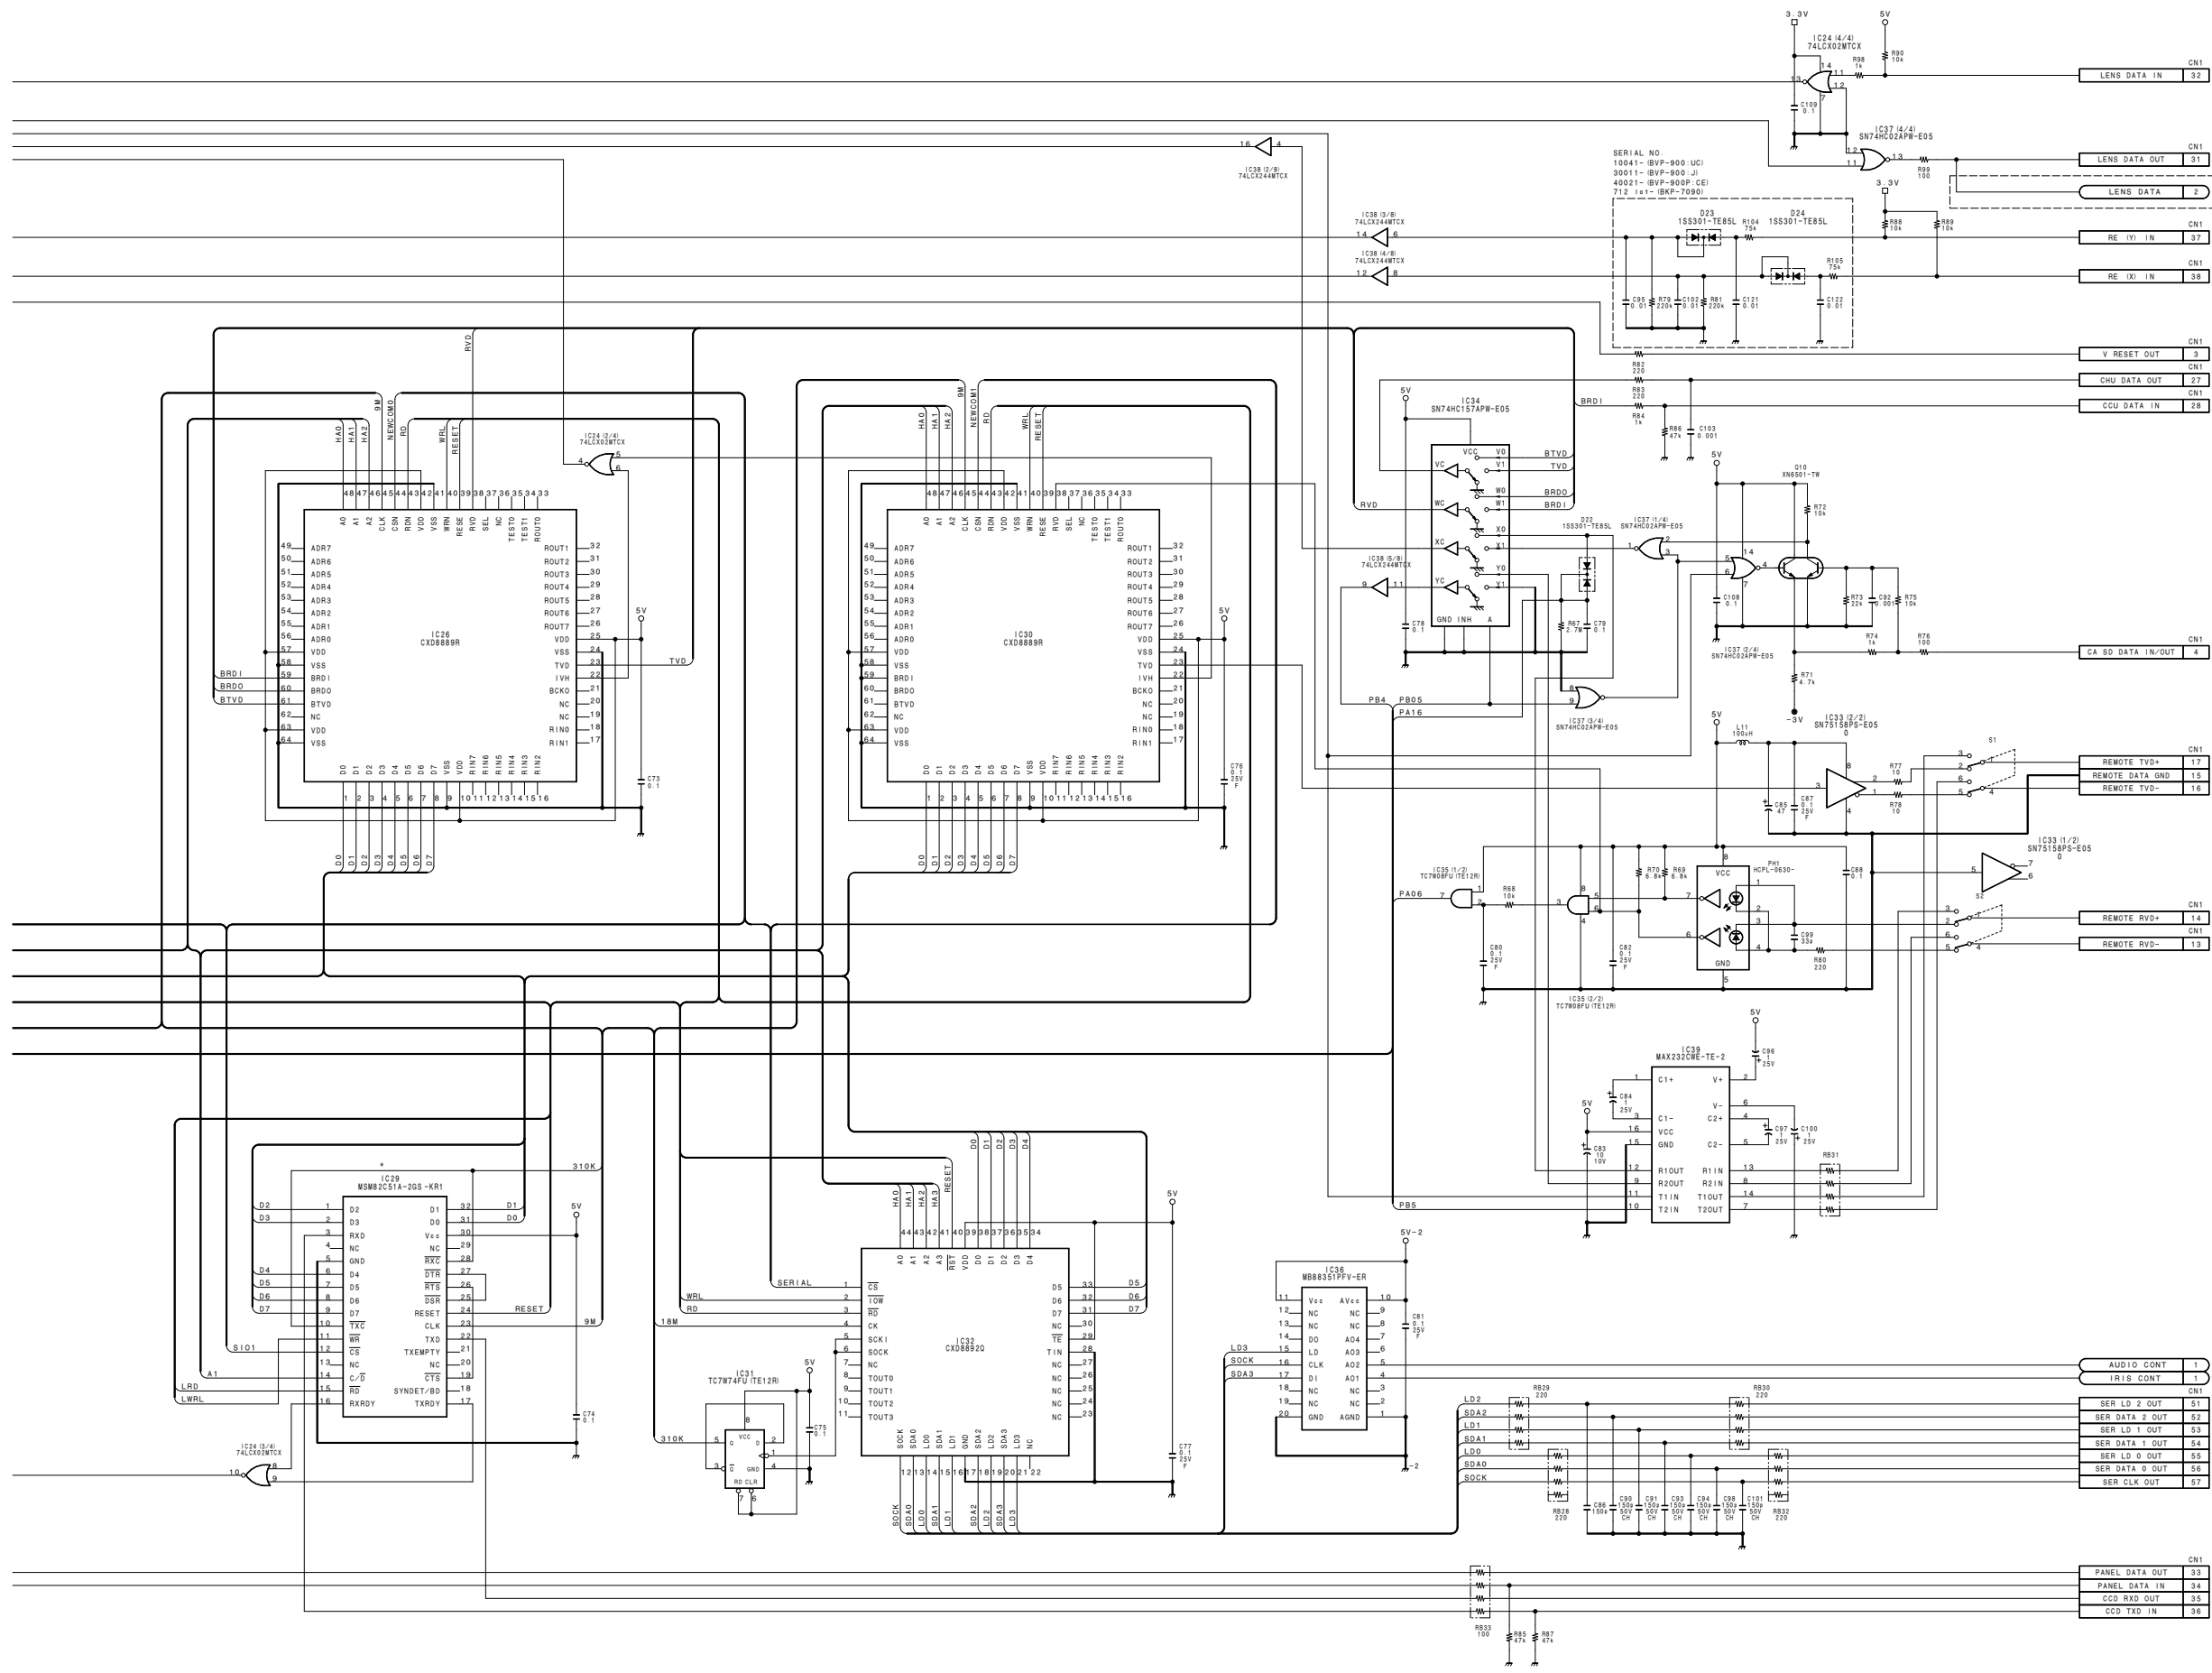

AT-120 (3/3)


BOARD NO. 1-667-975-11, 12, 13
LOT NO. 709-
B-VBP900-AT120-Z

BVP-900 (UC)
BVP-900 (J)
BVP-900P (CE)

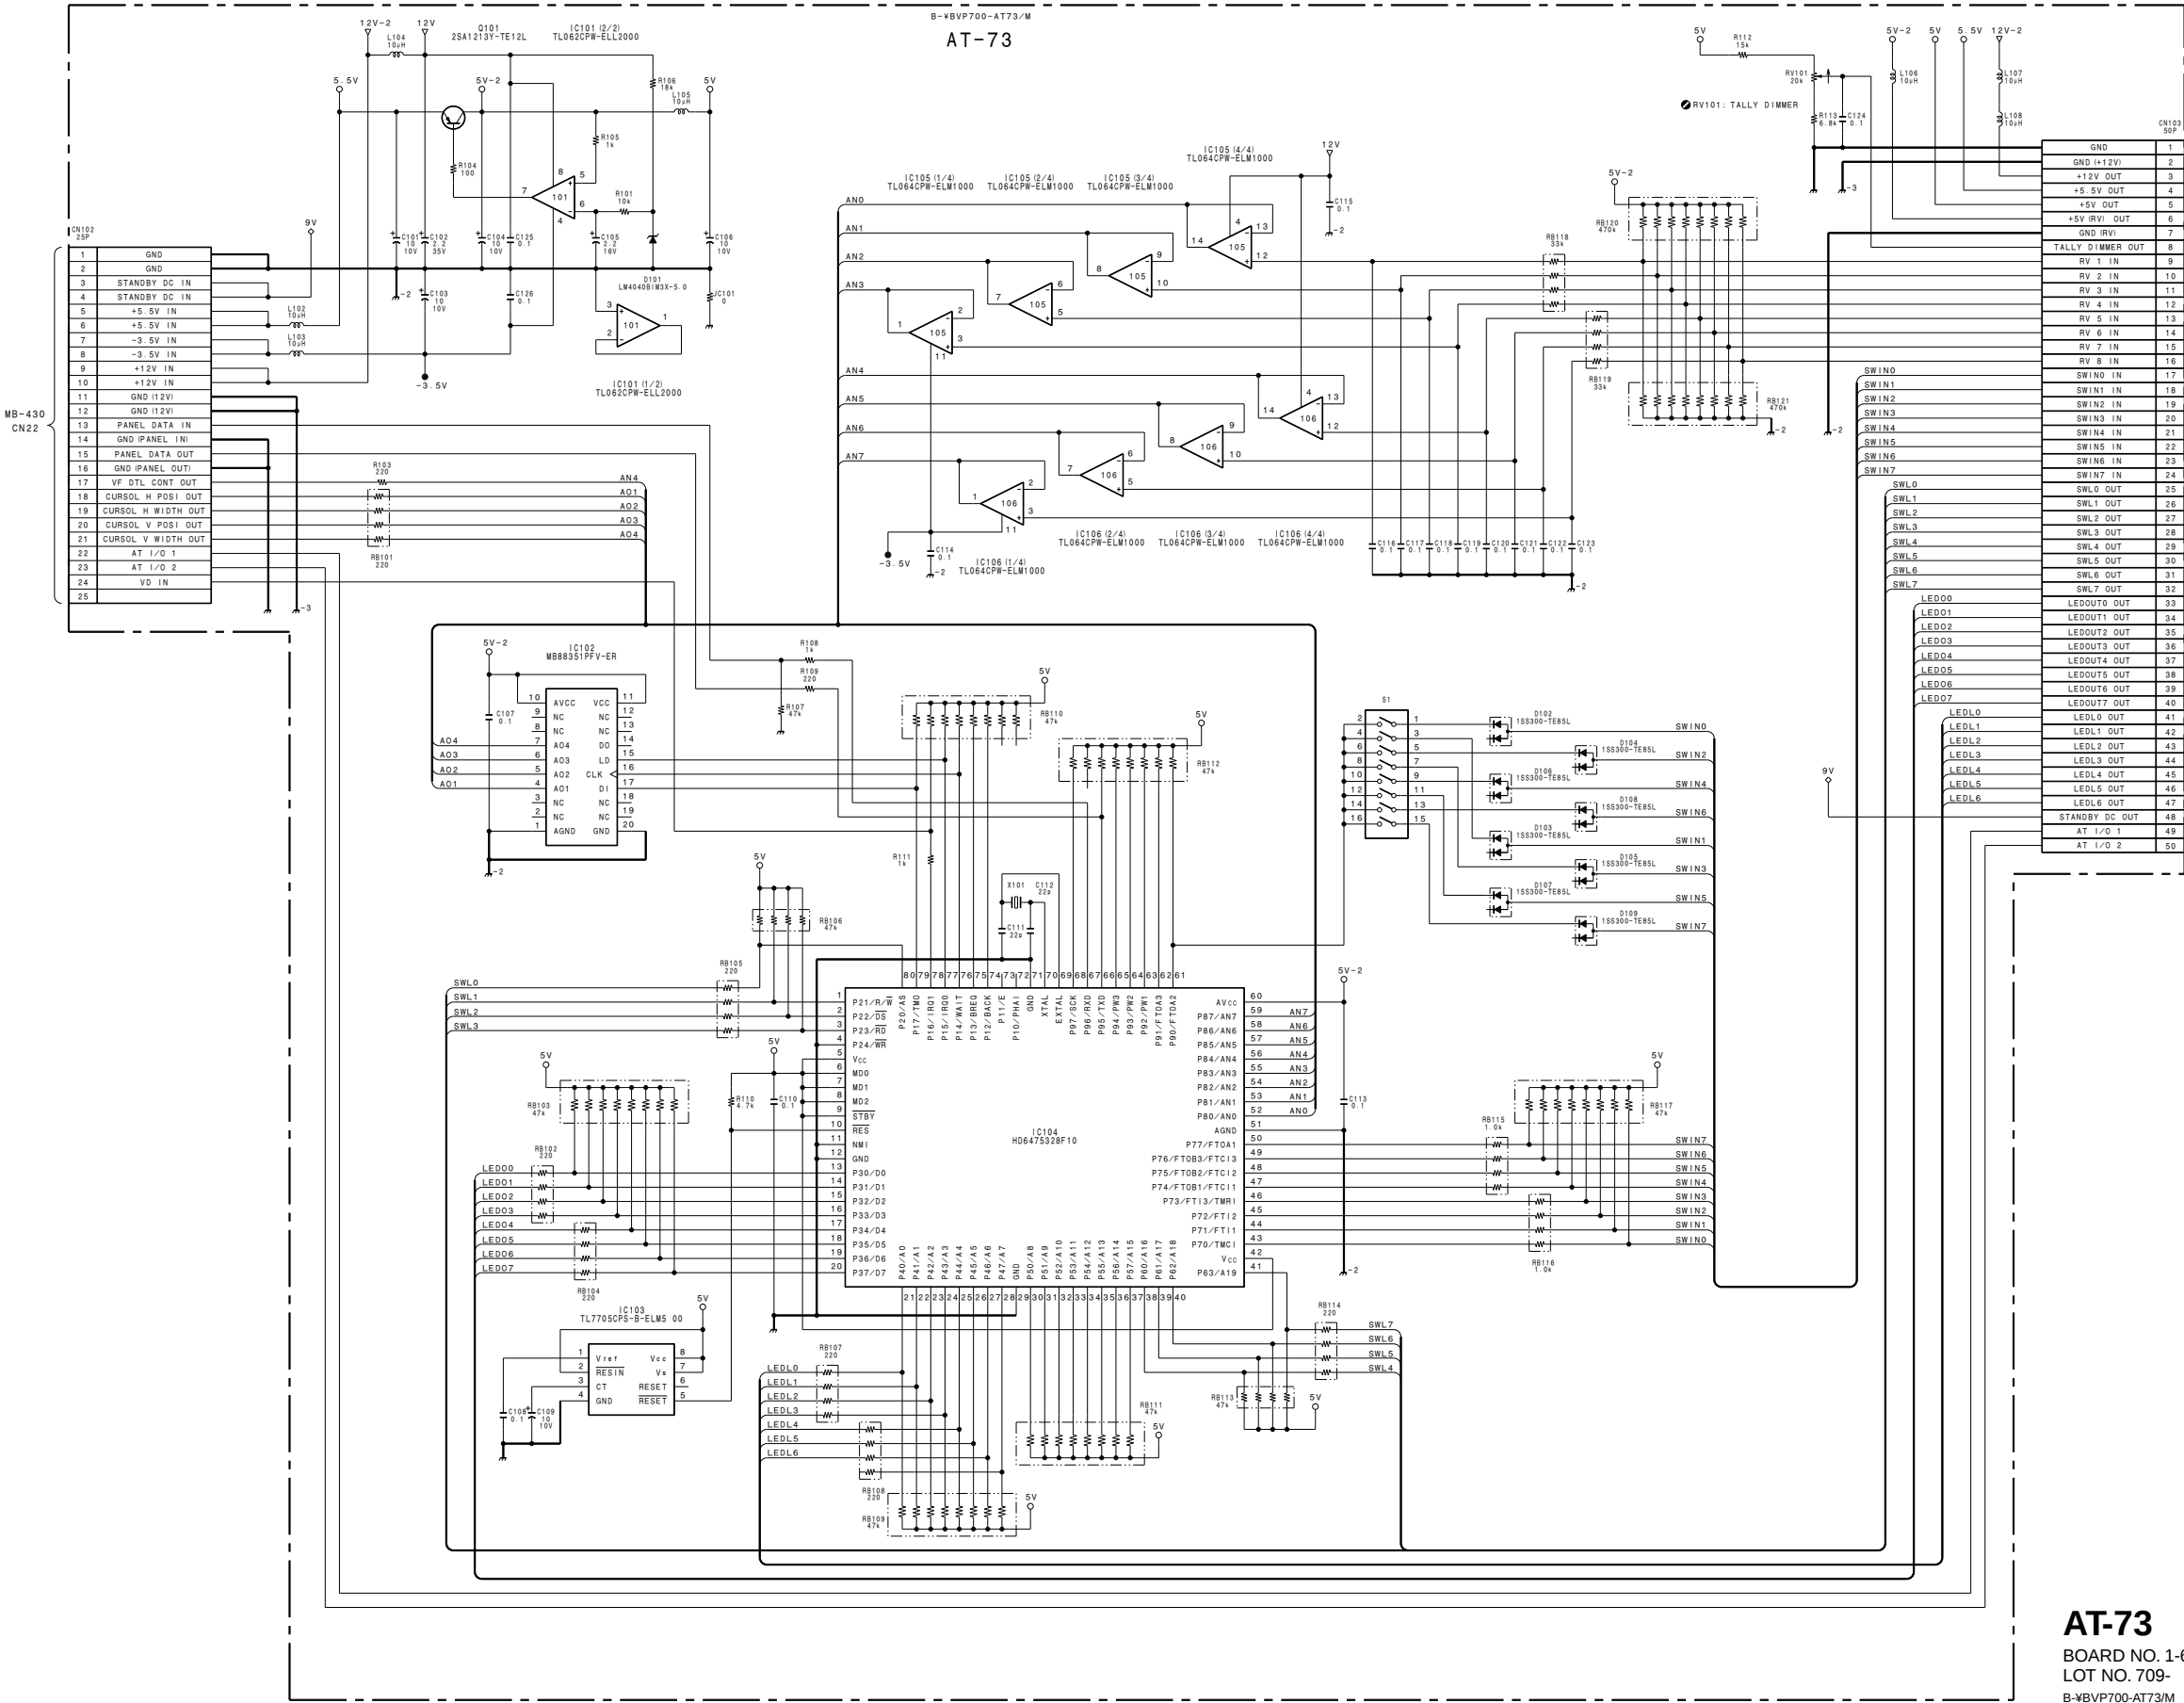

AT-73
BOARD NO. 1-653-464-11
LOT NO. 709-
B-BVP700-AT73/M


上記以外のコネクタの接続先については、FRAME WIRING (4-46 ページ) を参照。
Refer to FRAME WIRING (Page 4-46) in regard to destinations of connectors other than above.

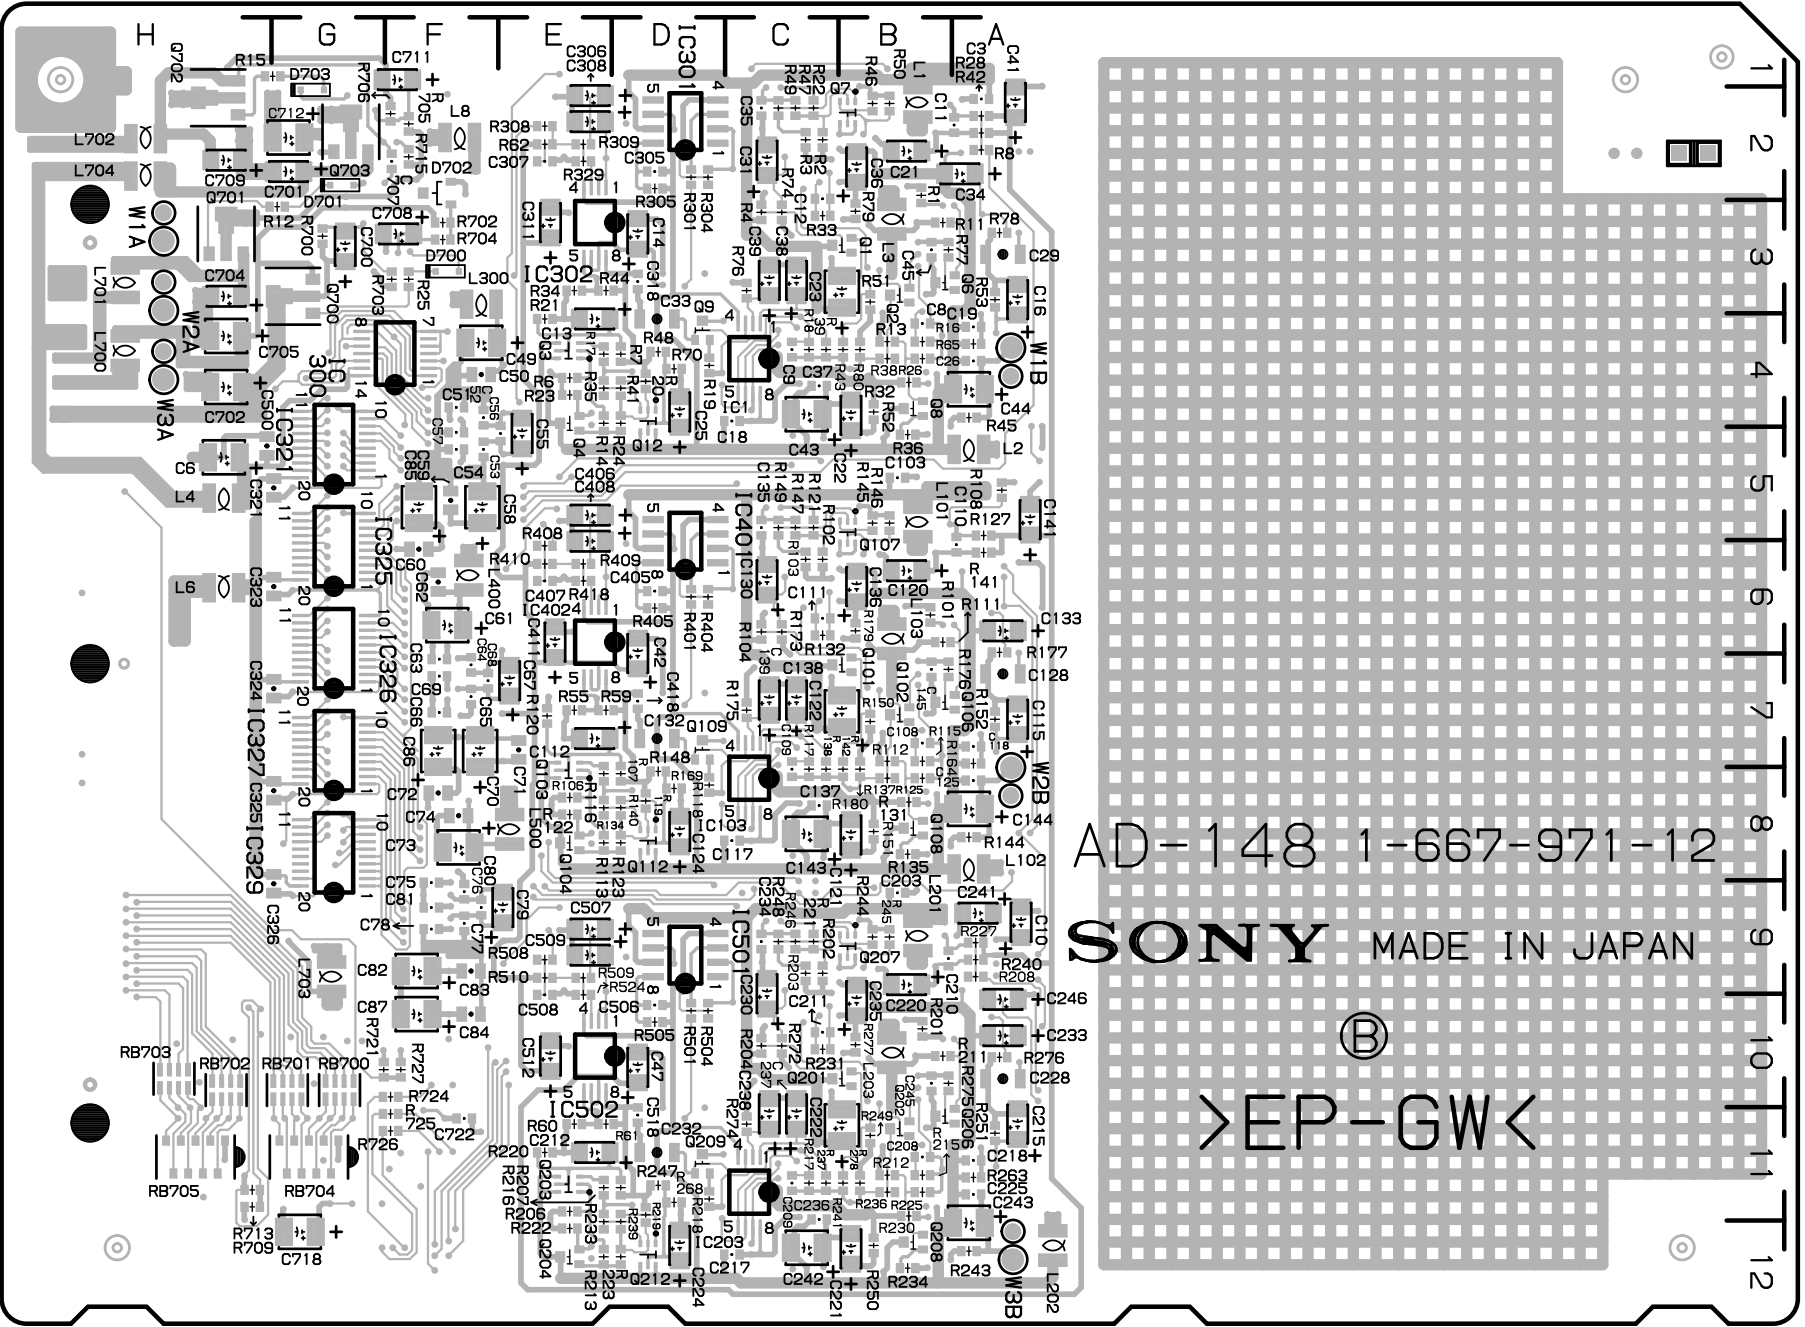

AD-148 -B SIDE-
SUFFIX : -12


R36	*B5	R169	*D8	R404	*D6
R37	A3	R172	C7	R405	*D6
R38	*B4	R173	*C6	R408	*E6
R39	*C4	R174	B8	R409	*E6
R40	C3	R175	*C7	R410	*E6
R41	*D4	R176	*B7	R418	*E6
R42	*A2	R177	*A6	R422	E6
R43	*B4	R179	*B6	R423	E5
R44	*E3	R180	*B8	R424	E5
R45	*A4	R184	C5	R500	D9
R46	*B2	R201	*B10	R501	*D10
R47	*C2	R202	*C9	R502	D9
R48	*D4	R203	*C9	R503	E9
R49	*C2	R204	*C10	R504	*D10
R50	*B2	R206	*E11	R505	*D10
R51	*B3	R207	*D11	R508	*E9
R52	*B4	R208	*A9	R509	*E9
R53	*A3	R209	B9	R510	*E9
R54	A3	R210	B11	R524	*E10
R55	*E7	R211	*B10	R528	E9
R56	C2	R212	*B11	R529	E9
R57	B3	R213	*E12	R530	E9
R58	B3	R215	*B11	R700	*G3
R59	*E7	R216	*E11	R701	G2
R60	*E11	R217	*C11	R702	*F3
R61	*E11	R218	*D11	R703	*F3
R62	*E2	R219	*D11	R704	*F3
R65	*A4	R220	*E11	R705	*F2
R68	B5	R221	*C9	R706	*F2
R69	A3	R222	*E12	R709	*H11
R70	*D4	R223	*D12	R710	G2
R73	C3	R224	C11	R713	*H11
R74	*C3	R225	*B11	R714	G1
R75	B4	R226	C11	R715	*F2
R76	*C3	R227	*A9	R718	G1
R77	*B3	R229	C12	R720	F10
R78	*A3	R230	*B11	R721	*G10
R79	*B3	R231	*C10	R722	G9
R80	*B4	R233	*E12	R723	G9
R84	C2	R234	*B12	R724	*F10
R101	*B6	R235	A10	R725	*F11
R102	*C6	R236	*B11	R726	*F11
R103	*C6	R237	*C11	R727	*F10
R104	*C6	R238	C10	R728	G10
R106	*E8	R239	*D12	R729	G10
R107	*D8	R240	*A9		
R108	*A5	R241	*B11	RB600	G4
R109	B6	R243	*A12	RB601	G5
R110	B7	R244	*B9	RB602	G5
R111	*B6	R245	*B9	RB603	G6
R112	*B7	R246	*C9	RB604	G6
R113	*E8	R247	*D11	RB605	G7
R115	*B7	R248	*C9	RB606	G7
R116	*E8	R249	*B11	RB607	G8
R117	*C8	R250	*B12	RB608	G8
R118	*D8	R251	*A11	RB700	*G10
R119	*D8	R252	A10	RB701	*G10
R120	*E7	R254	C9	RB702	*H10
R121	*C5	R255	B10	RB703	*H10
R122	*E8	R256	B10	RB704	*G11
R123	*D8	R263	*A11	RB705	*H11
R125	*B8	R266	B12		
R126	C7	R267	A10	RV1	A4
R127	*A5	R268	*D11	RV3	C3
R130	C8	R272	*C10	RV101	A8
R131	*B8	R273	B12	RV103	C6
R132	*C6	R274	*C11	RV201	A12
R134	*E8	R275	*B10	RV203	C10
R135	*B8	R276	*A10		
R136	A7	R277	*B10	TP1	E4
R137	*B8	R278	*B11	TP101	E8
R138	*C8	R286	A8	TP201	E12
R139	C7	R287	A12	TP300	D2
R140	*D8	R288	C9	TP400	D5
R141	*A6	R300	D2	TP500	D9
R142	*B8	R301	*D2	TP700	G3
R144	*A8	R302	D2	TP701	F3
R145	*B5	R303	E2	TP702	H2
R146	*B5	R304	*D2	TP703	G2
R147	*C5	R305	*D2	TP704	F2
R148	*D8	R308	*E2		
R149	*C5	R309	*E2	W1A	H3
R150	*B7	R316	H4	W1B	A4
R151	*B8	R317	H5	W2A	H3
R152	*A7	R329	*E2	W2B	A8
R153	A6	R333	E2	W3A	H4
R155	C6	R334	E1	W3B	A12
R156	B7	R335	E1		
R157	B6	R400	D6		
R164	*A7	R401	*D6		
R167	B8	R402	D6		
R168	A7	R403	E6		

*: B SIDE

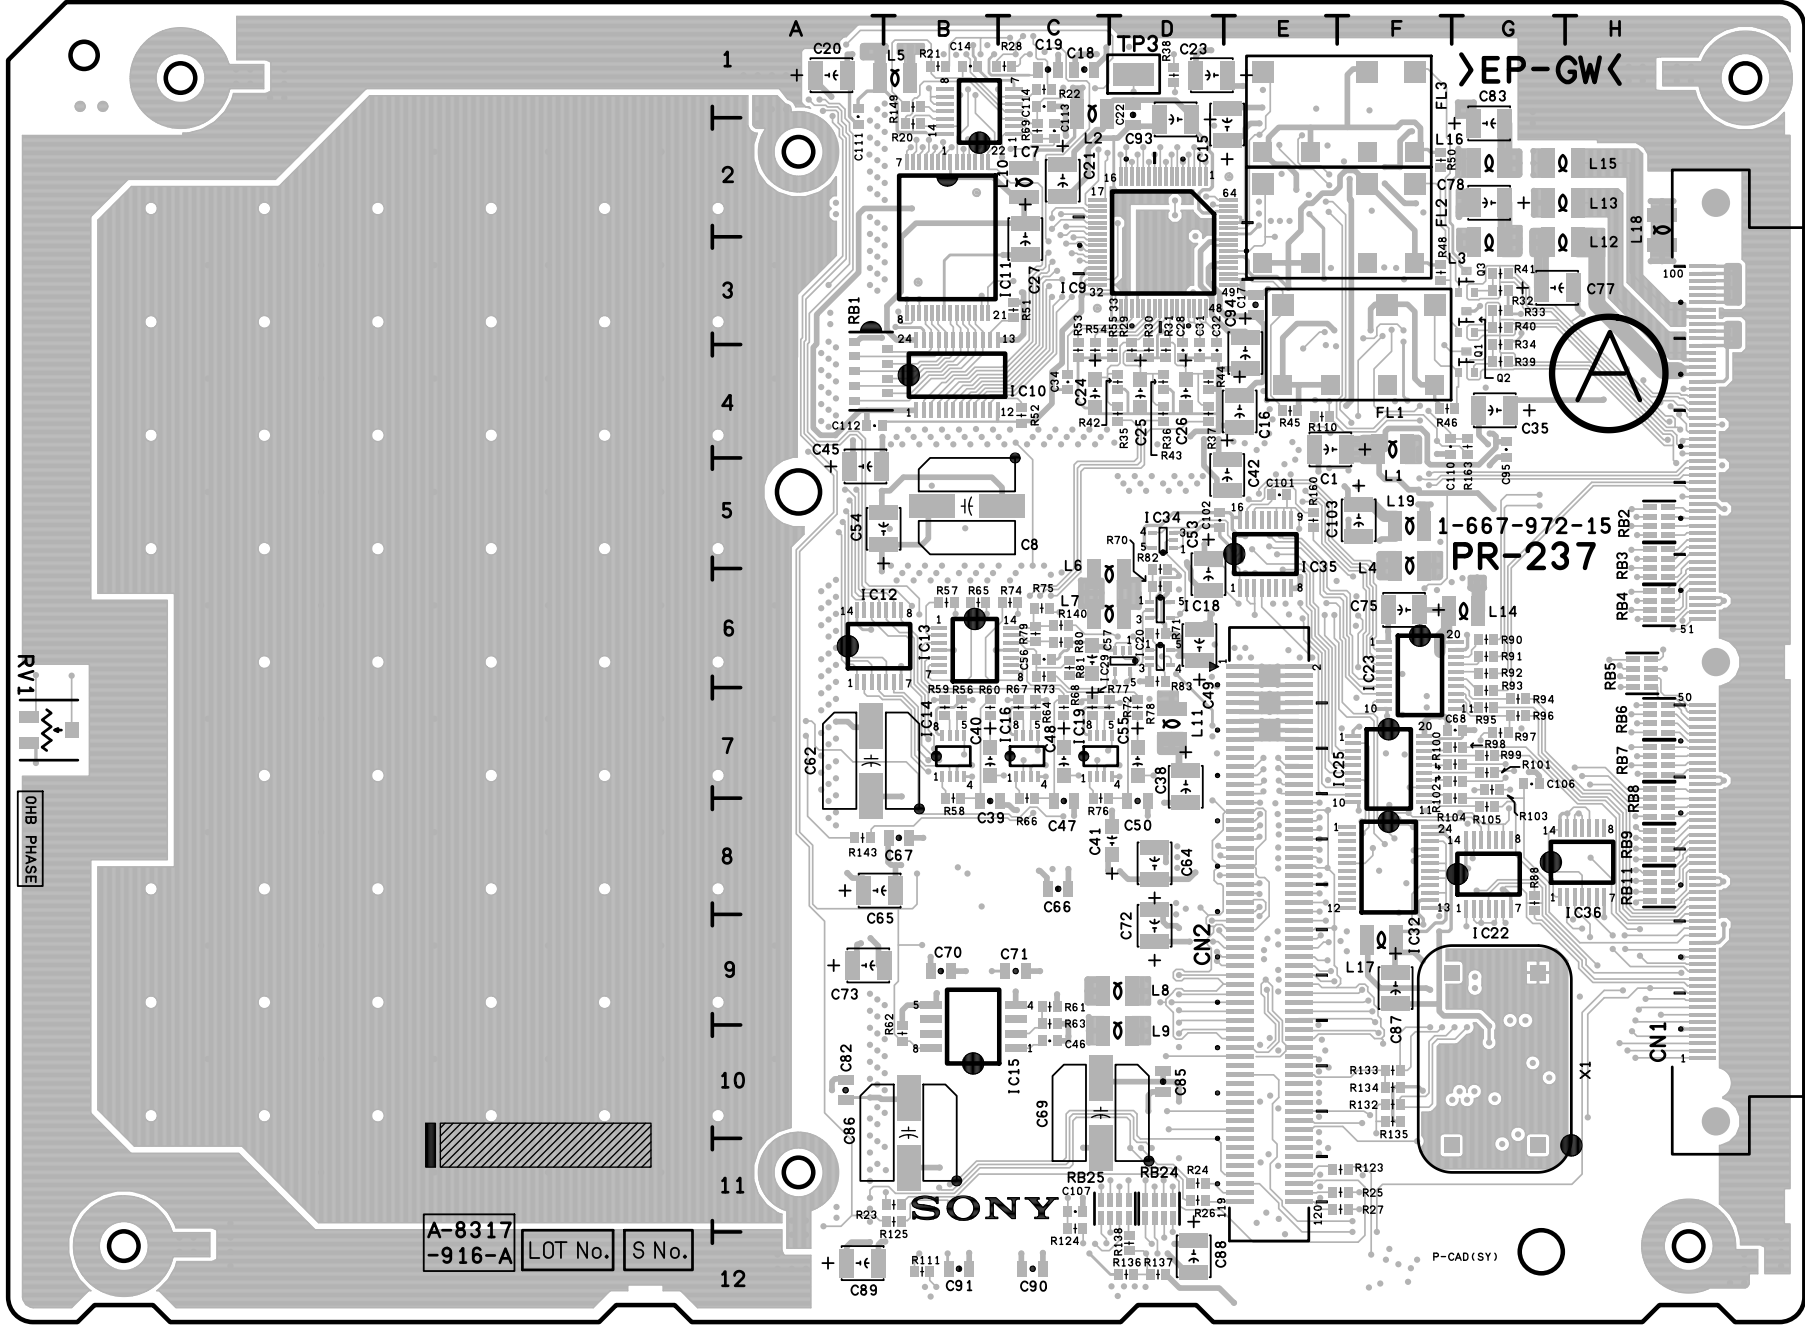

BVP-900 (UC) : S/N 18001 and Higher
BVP-900 (J) : S/N 38001 and Higher
BVP-900P (CE) : S/N 48001 and Higher


PR-237 -A SIDE-
SUFFIX : -15

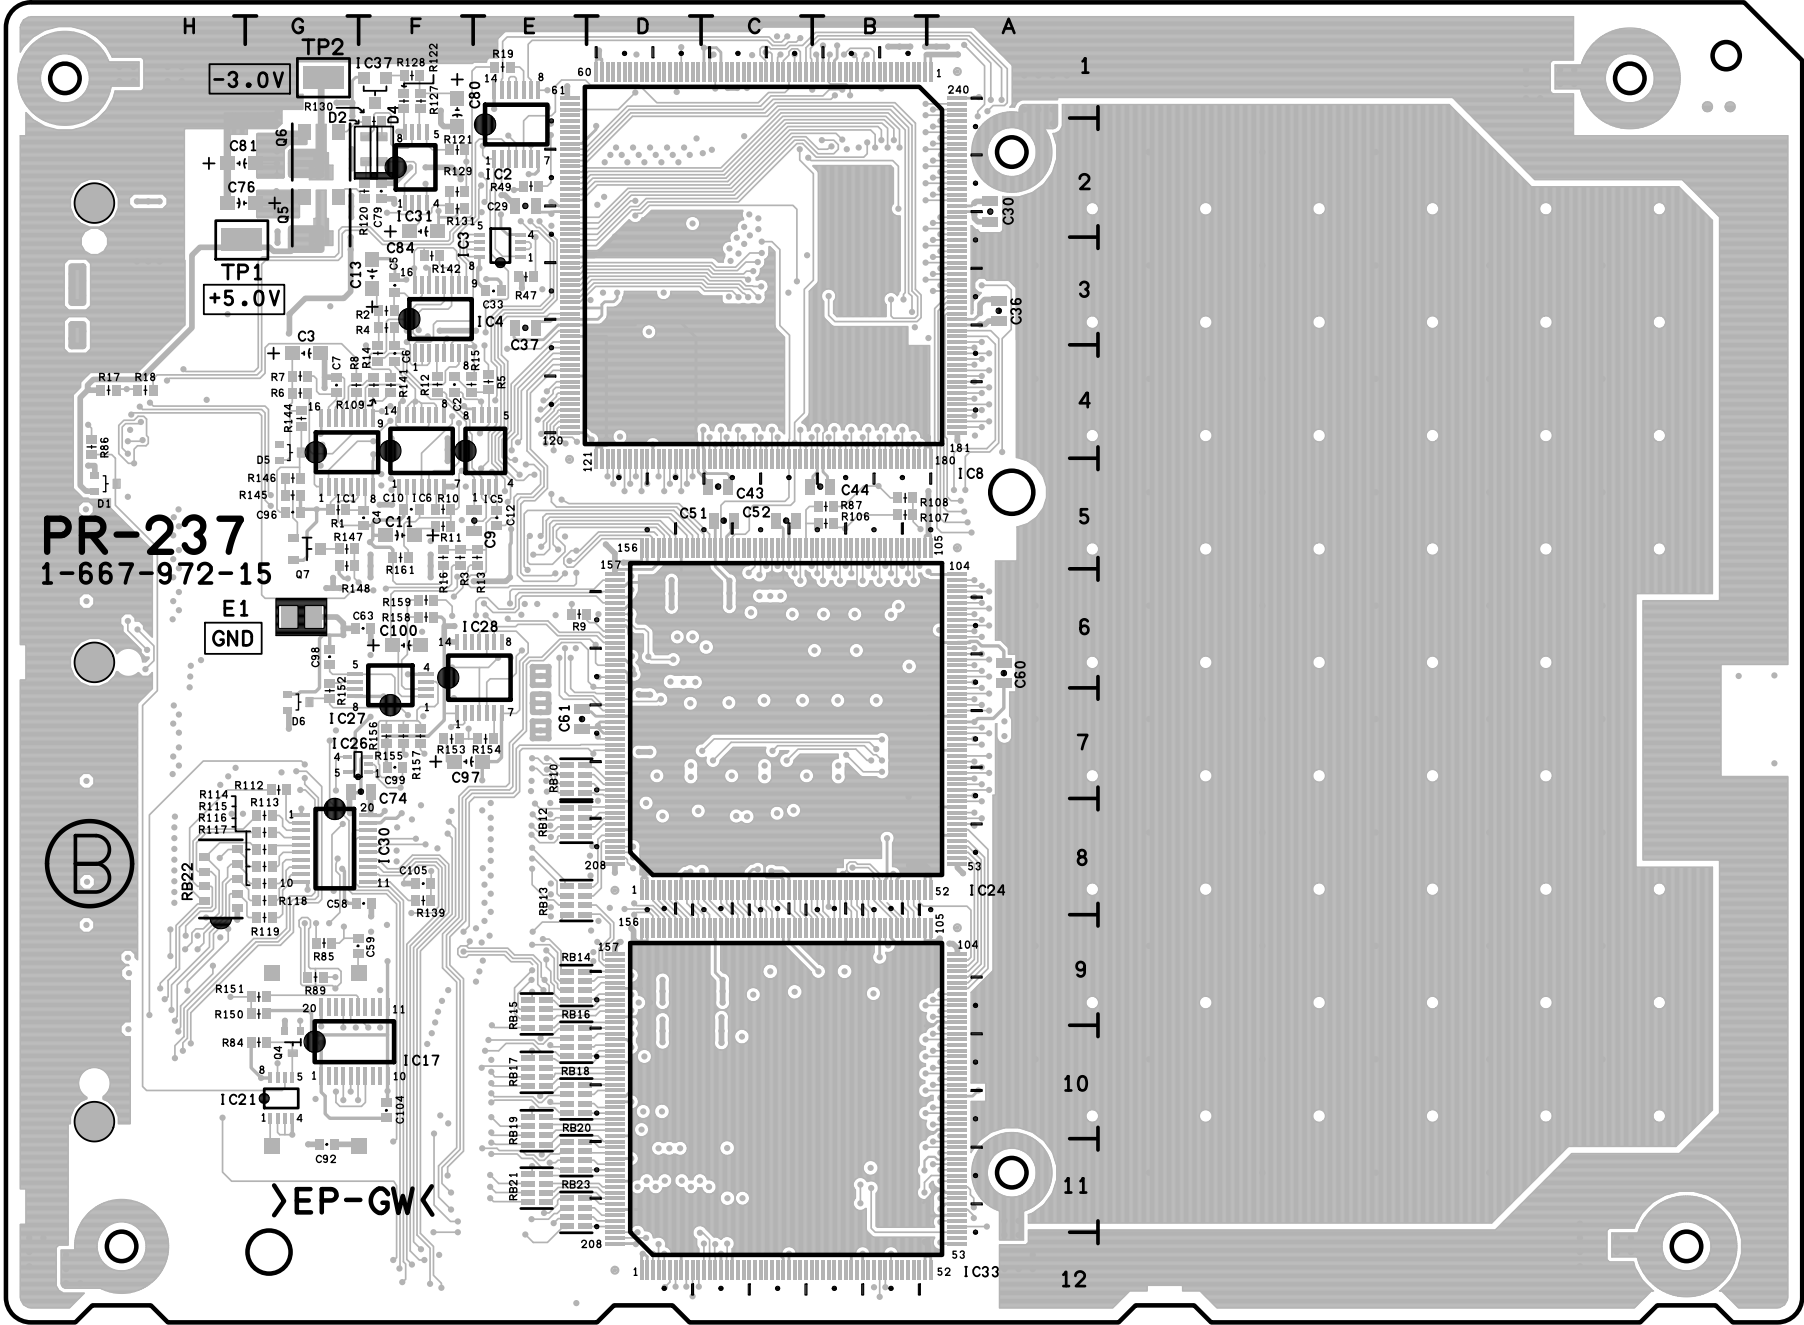

PR-237 -B SIDE-
SUFFIX : -15


PR-237(1-667-972-15)

C1	E4	C93	D2	L19	F5	R83	D6	RB13	*E8
C2	*F4	C94	E4			R84	*G10	RB14	*E9
C3	*G4	C95	G4	Q1	G4	R85	*G9	RB15	*E9
C4	*F5	C96	*G5	Q2	G3	R86	*H4	RB16	*E10
C5	*F3	C97	*F7	Q3	G3	R87	*B5	RB17	*E10
C6	*F4	C98	*G6	Q4	*G10	R88	G8	RB18	*E10
C7	*G4	C99	*F7	Q5	*G2	R89	*G9	RB19	*E10
C8	B5	C100	*F6	Q6	*G2	R90	G6	RB20	*E11
C9	*E5	C101	E5	Q7	*G5	R91	G6	RB21	*E11
C10	*F5	C102	D5			R92	G6	RB22	*H8
C11	*F5	C103	F5	R1	*G5	R93	G7	RB23	*E11
C12	*E5	C104	*F10	R2	*F3	R94	G7	RB24	D11
C13	*F3	C105	*F8	R3	*F5	R95	G7	RB25	D11
C14	B1	C106	G7	R4	*F3	R96	G7		
C15	E2	C107	C11	R5	*E4	R97	G7	RV1	A7
C16	E4	C110	F4	R6	*G4	R98	G7		
C17	E3	C111	A1	R7	*G4	R99	G7	TP1	*H3
C18	C1	C112	A4	R8	*G4	R100	G7	TP2	*G1
C19	C1	C113	C2	R9	*E6	R101	G7	TP3	D1
C20	A1	C114	C1	R10	*F5	R102	G7		
C21	C2			R11	*F5	R103	G7	X1	G10
C22	D1	CN1	H6	R12	*F4	R104	G8		
C23	D1	CN2	E9	R13	*E5	R105	G8		
C24	C4			R14	*F4	R106	*B5		
C25	D4	D1	*H5	R15	*F4	R107	*B5		
C26	D4	D2	*F2	R16	*F5	R108	*B5		
C27	C3	D4	*F2	R17	*H4	R109	*F4		
C28	D4	D5	*G4	R18	*H4	R110	E4		
C29	*E2	D6	*G7	R19	*E1	R111	B12		
C30	*A2			R20	B2	R112	*G7		
C31	D4	E1	*G6	R21	B1	R113	*G8		
C32	D4			R22	C1	R114	*G8		
C33	*E3	FL1	F4	R23	B11	R115	*G8		
C34	C4	FL2	F2	R24	D11	R116	*G8		
C35	G4	FL3	F1	R25	F11	R117	*G8		
C36	*A3			R26	D11	R118	*G8		
C37	*E3	IC1	*G4	R27	F11	R119	*G9		
C38	D7	IC2	*E2	R28	C1	R120	*F2		
C39	B8	IC3	*E3	R29	D4	R121	*F2		
C40	B7	IC4	*F3	R30	D4	R122	*F1		
C41	D8	IC5	*E4	R31	D4	R123	F11		
C42	E5	IC6	*F4	R32	G3	R124	C11		
C43	*C5	IC7	B1	R33	G3	R125	B11		
C44	*B5	IC8	*C3	R34	G4	R127	*F1		
C45	A5	IC9	D3	R35	D4	R128	*F1		
C46	C10	IC10	B4	R36	D4	R129	*F2		
C47	C8	IC11	B3	R37	D4	R130	*F2		
C48	C7	IC12	A6	R38	D1	R131	*F2		
C49	D6	IC13	B6	R39	G4	R132	F10		
C50	D8	IC14	B7	R40	G3	R133	F10		
C51	*C5	IC15	B10	R41	G3	R134	F10		
C52	*C5	IC16	C7	R42	D4	R135	F10		
C53	D6	IC17	*G10	R43	D4	R136	D12		
C54	A5	IC18	D6	R44	D4	R137	D12		
C55	D7	IC19	C7	R45	E4	R138	D12		
C56	C6	IC20	D6	R46	F4	R139	*F8		
C57	C6	IC21	*G10	R47	*E3	R140	C6		
C58	*F8	IC22	G8	R48	F3	R141	*F4		
C59	*G9	IC23	F6	R49	*E2	R142	*F3		
C60	*A6	IC24	*C7	R50	F2	R143	A8		
C61	*E7	IC25	F7	R51	C3	R144	*G4		
C62	A7	IC26	*G7	R52	C4	R145	*G5		
C63	*F6	IC27	*F6	R53	C4	R146	*G5		
C64	D8	IC28	*E6	R54	C4	R147	*G5		
C65	A8	IC29	D6	R55	D4	R148	*G5		
C66	C8	IC30	*G8	R56	B7	R149	B1		
C67	B8	IC31	*F2	R57	B6	R150	*G9		
C68	G7	IC32	F8	R58	B8	R151	*G9		
C69	C10	IC33	*C10	R59	B7	R152	*G7		
C70	B9	IC34	D5	R60	B7	R153	*F7		
C71	C9	IC35	E5	R61	C9	R154	*E7		
C72	D9	IC36	H8	R62	B10	R155	*F7		
C73	A9	IC37	*F1	R63	C9	R156	*F7		
C74	*F7			R64	C7	R157	*F7		
C75	F6	L1	F4	R65	B6	R158	*F6		
C76	*H2	L2	C1	R66	C8	R159	*F6		
C77	G3	L3	G3	R67	C7	R160	E5		
C78	G2	L4	F5	R68	C7	R161	*F5		
C79	*F2	L5	B1	R69	C2	R163	G4		
C80	*F1	L6	C6	R70	D6				
C81	*H2	L7	C6	R71	D6	RB1	A4		
C82	A10	L8	D9	R72	C7	RB2	H5		
C83	G2	L9	D10	R73	C6	RB3	H5		
C84	*F2	L10	C2	R74	C6	RB4	H6		
C85	D10	L11	D7	R75	C6	RB5	H6		
C86	B10	L12	G3	R76	C8	RB6	H7		
C87	F9	L13	G2	R77	C7	RB7	H7		
C88	D12	L14	G6	R78	D7	RB8	H8		
C89	A12	L15	G2	R79	C6	RB9	H8		
C90	C12	L16	G2	R80	C6	RB10	*E7		
C91	B12	L17	F9	R81	C6	RB11	H8		
C92	*G11	L18	H2	R82	D6	RB12	*E8		

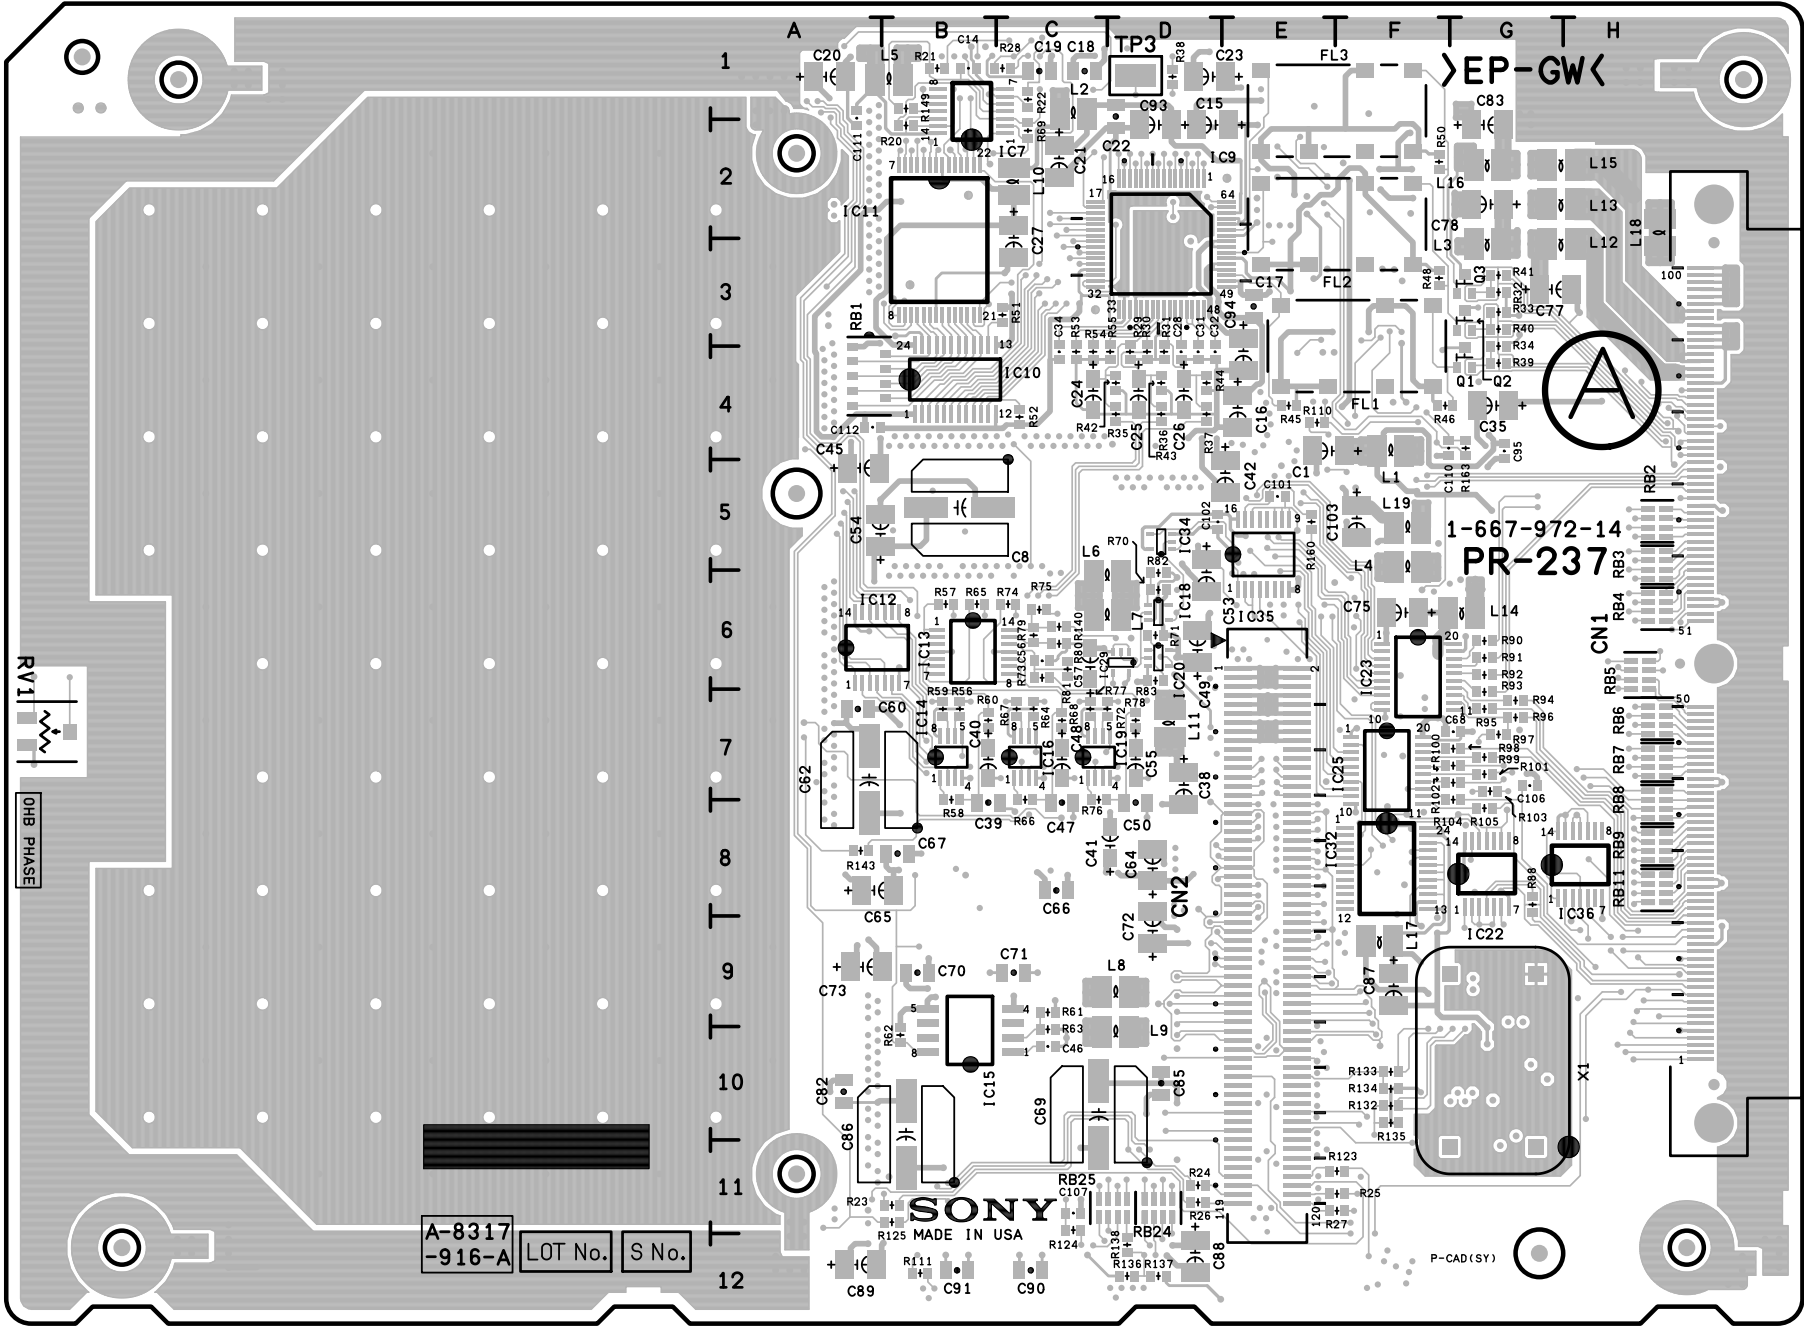

BVP-900 (UC) : S/N 15001 through 18000
BVP-900 (J) : S/N 35001 through 38000
BVP-900P (CE) : S/N 45001 through 48000


PR-237 -A SIDE-
SUFFIX : -14

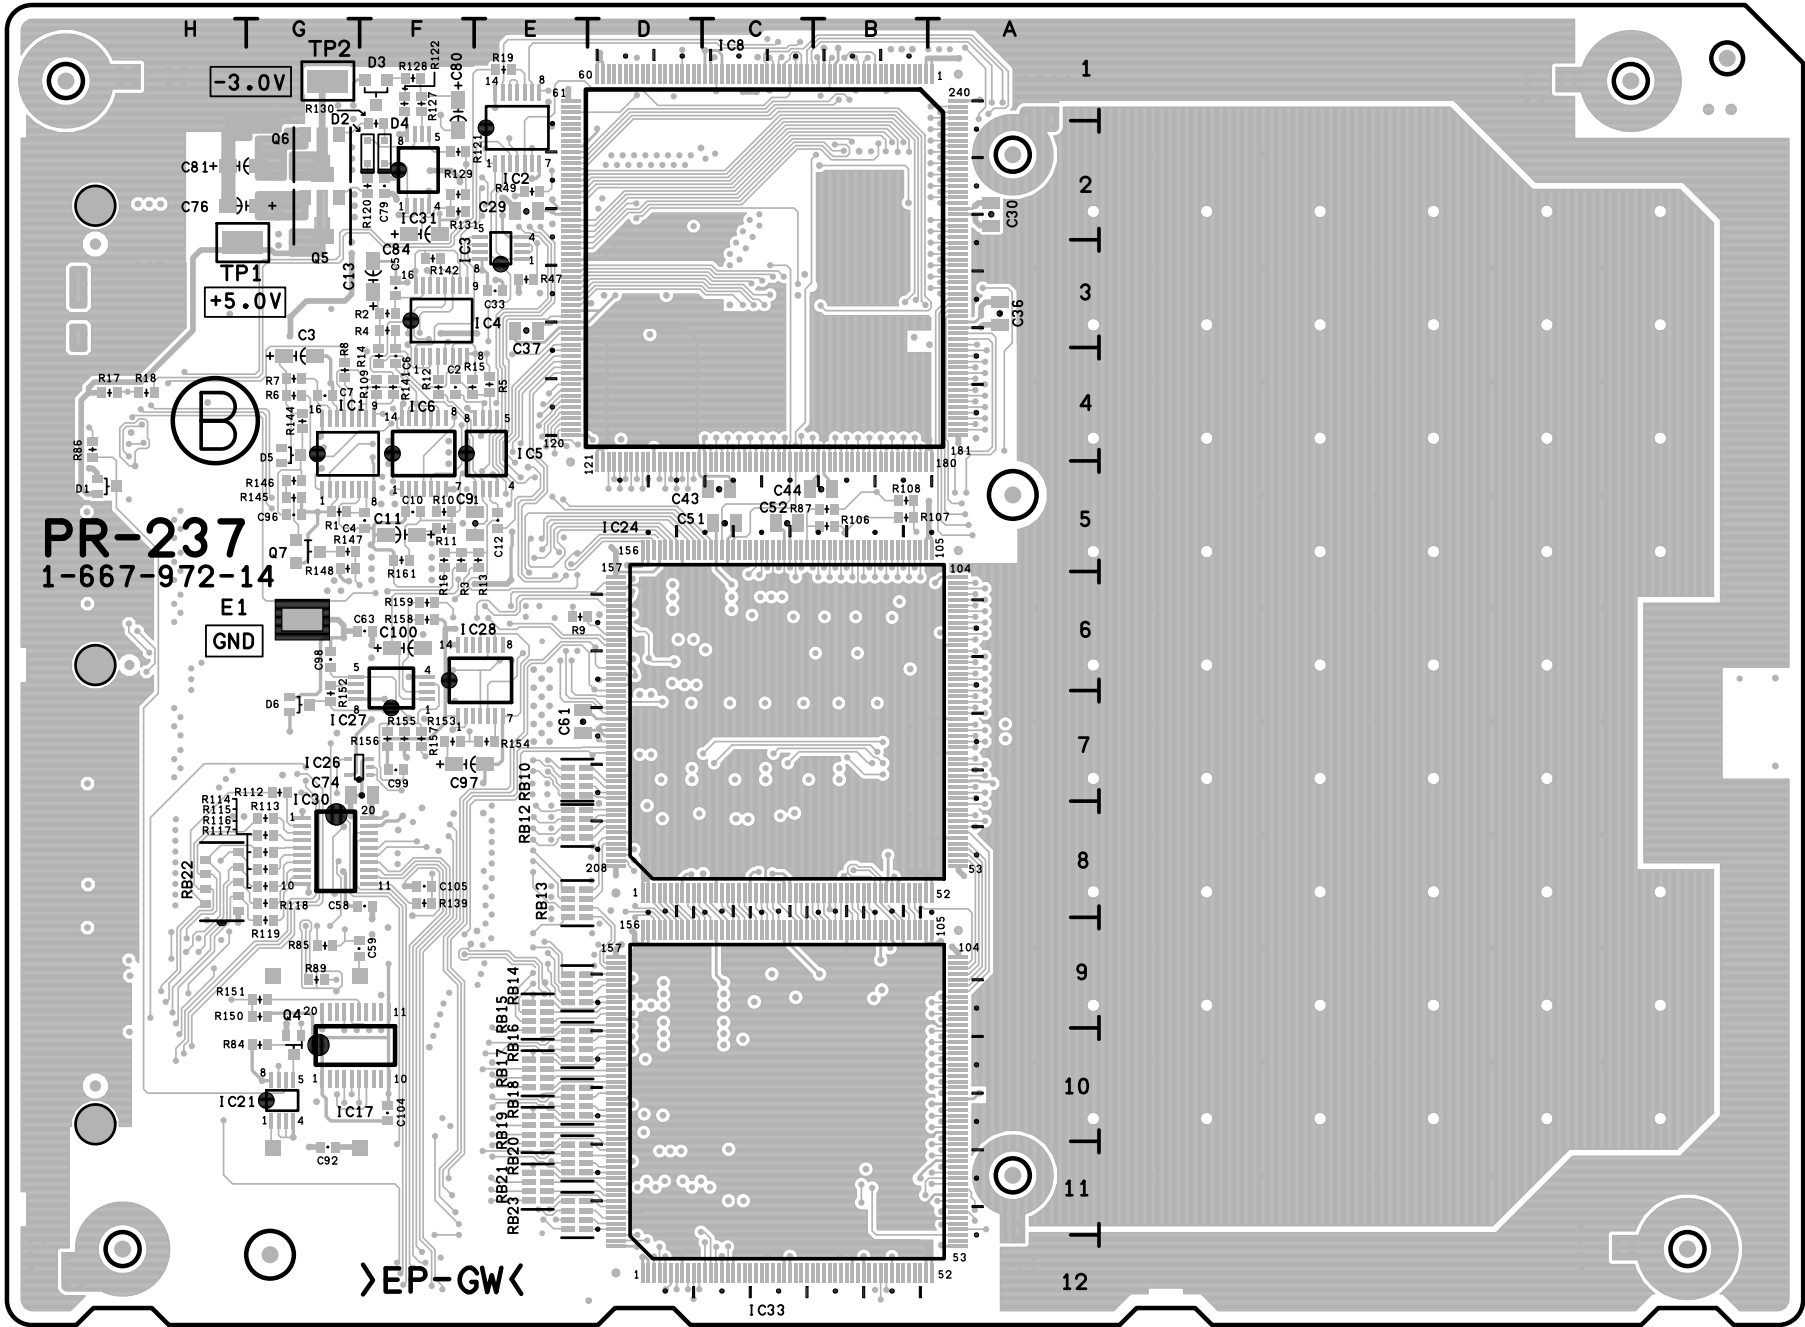

PR-237 -B SIDE-
SUFFIX : -14

PR-237(1-667-972-14)

C1	E4	C93	D2	Q1	G4	R85	*G9	RB15	*E9
C2	*F4	C94	E4	Q2	G3	R86	*H4	RB16	*E10
C3	*G4	C95	G4	Q3	G3	R87	*B5	RB17	*E10
C4	*F5	C96	*G5	Q4	*G10	R88	G8	RB18	*E10
C5	*F3	C97	*F7	Q5	*G2	R89	*G9	RB19	*E10
C6	*F4	C98	*G6	Q6	*G2	R90	G6	RB20	*E11
C7	*G4	C99	*F7	Q7	*G5	R91	G6	RB21	*E11
C8	B5	C100	*F6			R92	G6	RB22	*H8
C9	*E5	C101	E5	R1	*G5	R93	G7	RB23	*E11
C10	*F5	C102	D5	R2	*F3	R94	G7	RB24	D11
C11	*F5	C103	F5	R3	*F5	R95	G7	RB25	D11
C12	*E5	C104	*F10	R4	*F3	R96	G7		
C13	*F3	C105	*F8	R5	*E4	R97	G7	RV1	A7
C14	B1	C106	G7	R6	*G4	R98	G7		
C15	D2	C107	C11	R7	*G4	R99	G7	TP1	*H3
C16	E4	C110	F4	R8	*G4	R100	G7	TP2	*G1
C17	E3	C111	A1	R9	*E6	R101	G7	TP3	D1
C18	C1	C112	A4	R10	*F5	R102	G7		
C19	C1			R11	*F5	R103	G7	X1	G10
C20	A1	CN1	H6	R12	*F4	R104	G8		
C21	C2	CN2	E9	R13	*E5	R105	G8		
C22	D1			R14	*F4	R106	*B5		
C23	D1	D1	*H5	R15	*F4	R107	*B5		
C24	C4	D2	*F2	R16	*F5	R108	*B5		
C25	D4	D3	*F1	R17	*H4	R109	*F4		
C26	D4	D4	*F2	R18	*H4	R110	E4		
C27	C3	D5	*G4	R19	*E1	R111	B12		
C28	D4	D6	*G7	R20	B2	R112	*G7		
C29	*E2			R21	B1	R113	*G8		
C30	*A2	E1	*G6	R22	C1	R114	*G8		
C31	D4			R23	B11	R115	*G8		
C32	D4	FL1	F4	R24	D11	R116	*G8		
C33	*E3	FL2	F2	R25	F11	R117	*G8		
C34	C4	FL3	F1	R26	D11	R118	*G8		
C35	G4			R27	F11	R119	*G9		
C36	*A3	IC1	*G4	R28	C1	R120	*F2		
C37	*E3	IC2	*E2	R29	D4	R121	*F2		
C38	D7	IC3	*E3	R30	D4	R122	*F1		
C39	B8	IC4	*F3	R31	D4	R123	F11		
C40	B7	IC5	*E4	R32	G3	R124	C11		
C41	D8	IC6	*F4	R33	G3	R125	B11		
C42	E5	IC7	B1	R34	G4	R127	*F1		
C43	*C5	IC8	*C3	R35	D4	R128	*F1		
C44	*B5	IC9	D3	R36	D4	R129	*F2		
C45	A5	IC10	B4	R37	D4	R130	*F2		
C46	C10	IC11	B3	R38	D1	R131	*F2		
C47	C8	IC12	A6	R39	G4	R132	F10		
C48	C7	IC13	B6	R40	G3	R133	F10		
C49	D6	IC14	B7	R41	G3	R134	F10		
C50	D8	IC15	B10	R42	D4	R135	F10		
C51	*C5	IC16	C7	R43	D4	R136	D12		
C52	*C5	IC17	*G10	R44	D4	R137	D12		
C53	D6	IC18	D6	R45	E4	R138	D12		
C54	A5	IC19	C7	R46	F4	R139	*F8		
C55	D7	IC20	D6	R47	*E3	R140	C6		
C56	C6	IC21	*G10	R48	F3	R141	*F4		
C57	C6	IC22	G8	R49	*E2	R142	*F3		
C58	*F8	IC23	F6	R50	F2	R143	A8		
C59	*G9	IC24	*C7	R51	C3	R144	*G4		
C60	A7	IC25	F7	R52	C4	R145	*G5		
C61	*E7	IC26	*G7	R53	C4	R146	*G5		
C62	A7	IC27	*F6	R54	C4	R147	*G5		
C63	*F6	IC28	*E6	R55	D4	R148	*G5		
C64	D8	IC29	D6	R56	B7	R149	B1		
C65	A8	IC30	*G8	R57	B6	R150	*G9		
C66	C8	IC31	*F2	R58	B8	R151	*G9		
C67	B8	IC32	F8	R59	B7	R152	*G7		
C68	G7	IC33	*C10	R60	B7	R153	*F7		
C69	C10	IC34	D5	R61	C9	R154	*E7		
C70	B9	IC35	E5	R62	B10	R155	*F7		
C71	C9	IC36	H8	R63	C10	R156	*F7		
C72	D9			R64	C7	R157	*F7		
C73	A9	L1	F4	R65	B6	R158	*F6		
C74	*F7	L2	C1	R66	C8	R159	*F6		
C75	F6	L3	G3	R67	C7	R160	E5		
C76	*H2	L4	F5	R68	C7	R161	*F5		
C77	G3	L5	B1	R69	C2	R163	G4		
C78	G2	L6	C6	R70	D6				
C79	*F2	L7	C6	R71	D6	RB1	A4		
C80	*F1	L8	D9	R72	C7	RB2	H5		
C81	*H2	L9	D10	R73	C6	RB3	H5		
C82	A10	L10	C2	R74	C6	RB4	H6		
C83	G2	L11	D7	R75	C6	RB5	H6		
C84	*F2	L12	G3	R76	C8	RB6	H7		
C85	D10	L13	G2	R77	C7	RB7	H7		
C86	B10	L14	G6	R78	D7	RB8	H8		
C87	F9	L15	G2	R79	C6	RB9	H8		
C88	D12	L16	G2	R80	C6	RB10	*E7		
C89	A12	L17	F9	R81	C6	RB11	H8		
C90	C12	L18	H2	R82	D6	RB12	*E8		
C91	B12	L19	F5	R83	D6	RB13	*E8		
C92	*G11			R84	*G10	RB14	*E9		

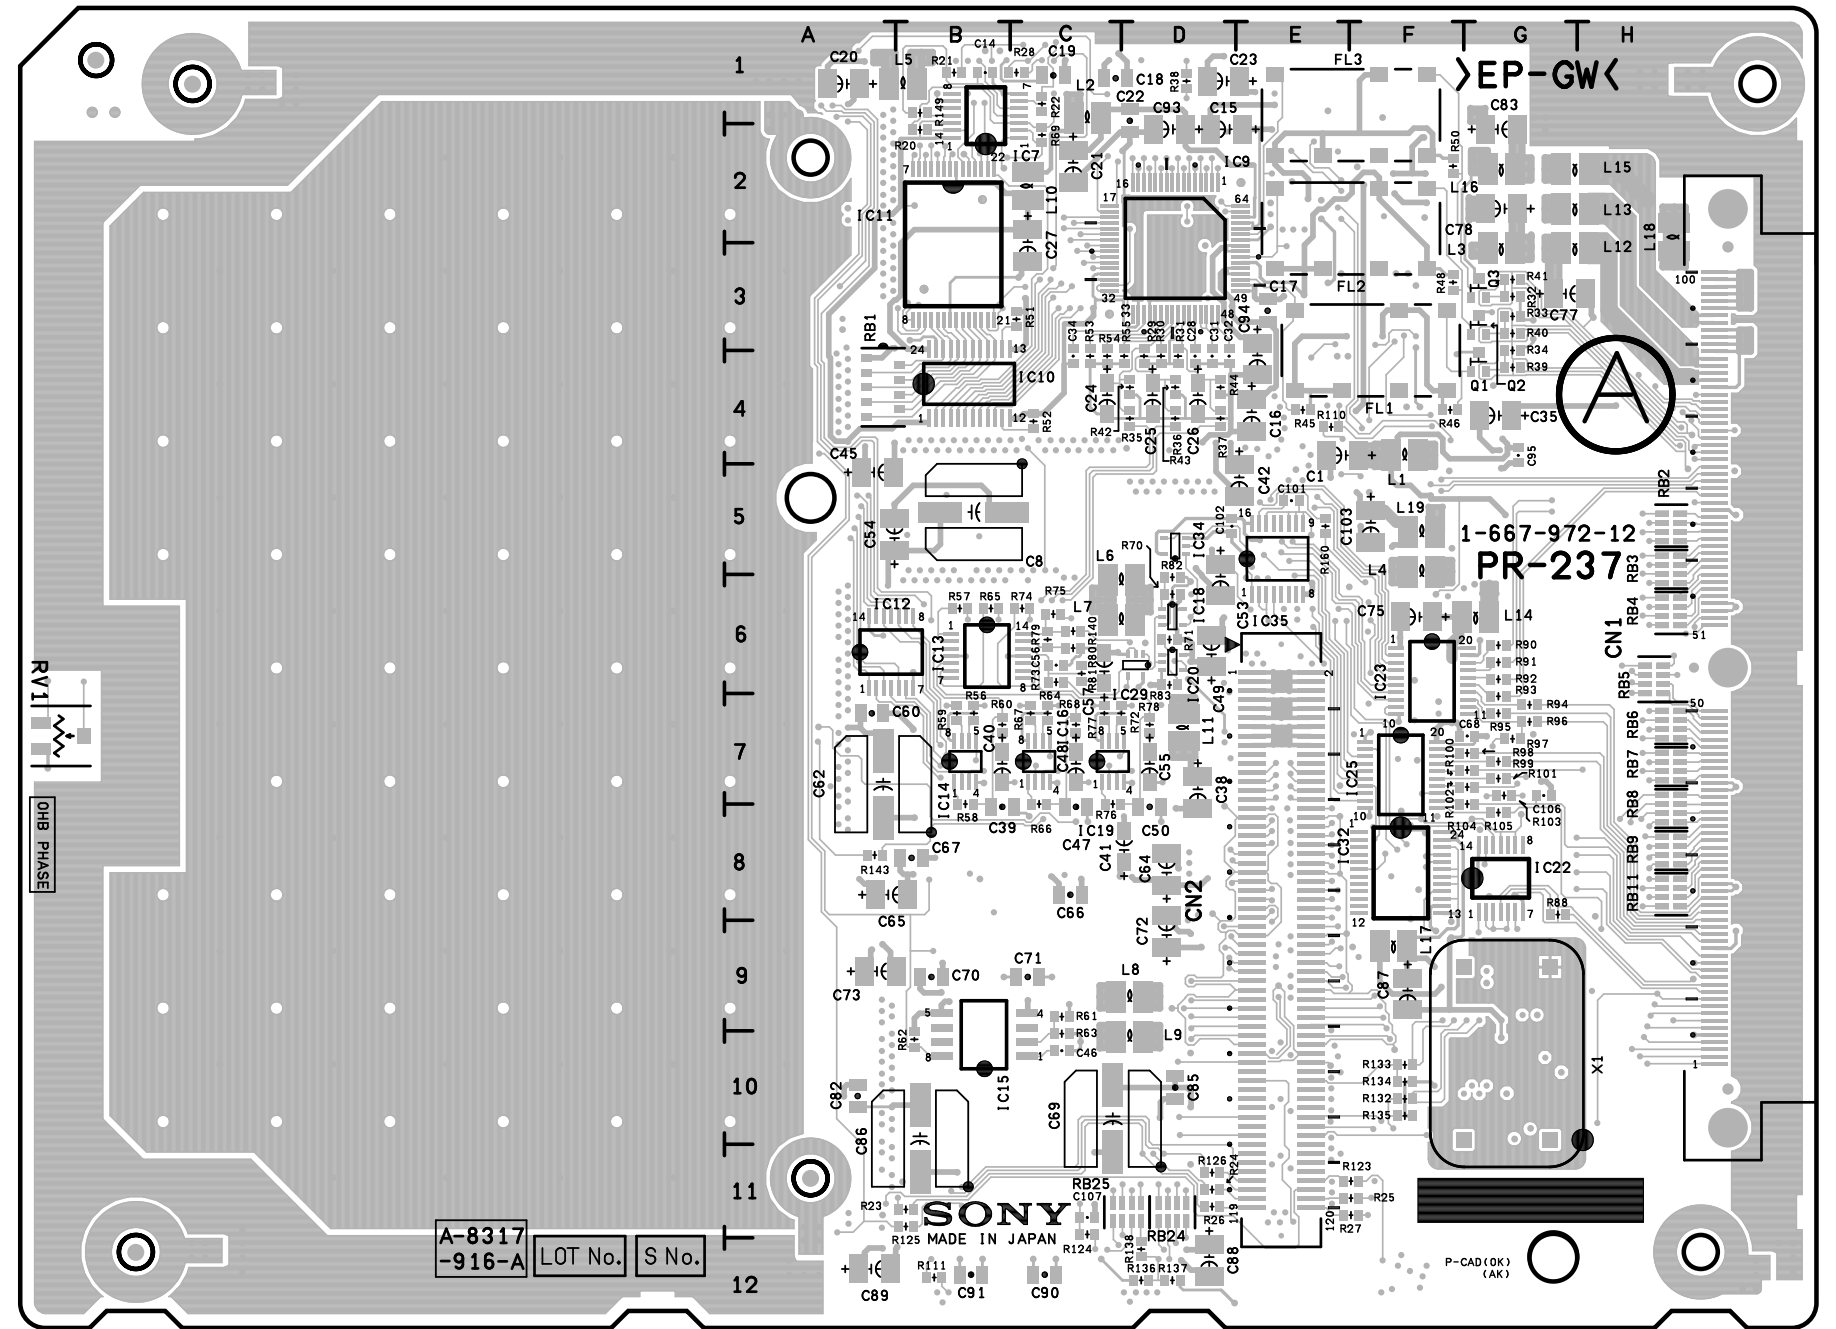

BVP-900 (UC) : S/N 10076 through 15000
BVP-900 (J) : S/N 30011 through 35000
BVP-900P (CE) : S/N 40031 through 45000

PR-237 -A SIDE-SUFFIX : -12

