

SONY®

CAMERA SYSTEM ADAPTOR

CA4000

CAMERA POWER BOOST KIT

SKC-PB40

F65 ADAPTOR

SKC-4065

FACTORY SERVICE MANUAL

1st Edition (Revised 1)

警告

このマニュアルは、サービス専用です。
お客様が、このマニュアルに記載された設置や保守、点検、修理などを行うと感電や火災、人身事故につながる可能性があります。
危険をさけるため、サービストレーニングを受けた技術者のみご使用ください。

WARNING

This manual is intended for qualified service personnel only.
To reduce the risk of electric shock, fire or injury, do not perform any servicing other than that contained in the operating instructions unless you are qualified to do so. Refer all servicing to qualified service personnel.

WARNUNG

Die Anleitung ist nur für qualifiziertes Fachpersonal bestimmt.
Alle Wartungsarbeiten dürfen nur von qualifiziertem Fachpersonal ausgeführt werden. Um die Gefahr eines elektrischen Schlages, Feuergefahr und Verletzungen zu vermeiden, sind bei Wartungsarbeiten strikt die Angaben in der Anleitung zu befolgen. Andere als die angegeben Wartungsarbeiten dürfen nur von Personen ausgeführt werden, die eine spezielle Befähigung dazu besitzen.

AVERTISSEMENT

Ce manuel est destiné uniquement aux personnes compétentes en charge de l'entretien. Afin de réduire les risques de décharge électrique, d'incendie ou de blessure n'effectuer que les réparations indiquées dans le mode d'emploi à moins d'être qualifié pour en effectuer d'autres. Pour toute réparation faire appel à une personne compétente uniquement.

Model Name	Serial No.
CA4000 (SY): LEMO Optical Fiber Connector	10001 and Higher
CA4000 (CED): LEMO Optical Fiber Connector	40001 and Higher
CA4000 (J): Tajimi Optical Fiber Connector	30001 and Higher

目次

このマニュアルについて

本書の目的.....	3
関連マニュアル.....	3
商標について.....	3
非公開の基板について.....	3
基板名について.....	3

1. Spare Parts

1-1. Note on Repair Parts.....	1-1
1-2. Electrical Parts List.....	1-2

2. Schematic Diagrams

AT-189.....	2-1
CN-3601.....	2-5
CN-3602.....	2-6
CN-3603.....	2-6
CN-3605.....	2-6
CN-3606.....	2-6
CN-3607.....	2-7
CN-3616.....	2-7
CN-3617.....	2-7
CN-3624.....	2-7
DPR-351.....	2-8
IF-1231.....	2-22
IF-1262.....	2-23
LE-391.....	2-24
SW-1592.....	2-24
SW-1592A.....	2-25
SW-1594.....	2-26
SW-1595.....	2-26
SY-427.....	2-27
TX-146.....	2-41

3. Board Layouts

AT-189.....	3-1
CN-3601.....	3-1
CN-3602.....	3-1
CN-3603.....	3-2
CN-3605.....	3-2
CN-3606.....	3-2
CN-3607.....	3-2
CN-3616.....	3-2
CN-3617.....	3-2
CN-3624.....	3-3

DPR-351.....	3-4
IF-1231.....	3-5
IF-1262.....	3-5
LE-391.....	3-5
SW-1592/1592A.....	3-5
SW-1594.....	3-5
SW-1595.....	3-6
SY-427.....	3-7
TX-146.....	3-8
Board Parts Location.....	3-9

このマニュアルについて

本書の目的

本書は、システムエンジニアやサービスエンジニアの方々にご使用いただくことを想定し、本機の保守に関する情報、部品レベルまでのサービスを前提とした情報 (パーツリスト、回路図、マウント図) を記載しています。

点検や修理を行う前に、別冊のサービスマニュアルの 安全に関する注意文を必ずお読みください。

関連マニュアル

本機には、この「ファクトリーサービスマニュアル」のほかに、下記のマニュアルが用意されています。

- オペレーションガイド (本機に付属)
- オペレーションマニュアル CD-ROM (本機に付属)
本機を実際に運用および操作するのに必要なマニュアルです。
- インストレーションマニュアル (別途用意)
本機の納入設置時に必要な情報を記載しています。
- サービスマニュアル (別途用意)
ブロックレベルまでのサービスに必要な情報として、本機のサービスインフォメーション、主要部品の交換等を記載しています。

商標について

このマニュアルに記載されている商標および登録商標は下記のとおりです。

- FRAM は、米国ラムトロンインターナショナル社の登録商標です。

その他、記載されているシステム名、製品名は、一般に各開発メーカーの登録商標または商標です。

非公開の基板について

下記の基板はマウント基板およびマウント部品個々での交換はできません。したがって回路図、マウント図および部品表は、公開していません。

- PS-869
- PS-869B
- PS-874
- RE-313
- RE-313B

基板名について

このファクトリーサービスマニュアルでは、基板名を以下のように記載している場合があります。

- AT-189S 基板を AT-189 基板と記載
- TX-146A 基板を TX-146 基板と記載

Table of Contents

Manual Structure

Purpose of this manual.....	3
Related manuals.....	3
Trademarks.....	3
Non-disclosed boards.....	3
Board names.....	3

1. Spare Parts

1-1. Note on Repair Parts.....	1-1
1-2. Electrical Parts List.....	1-2

2. Schematic Diagrams

AT-189.....	2-1
CN-3601.....	2-5
CN-3602.....	2-6
CN-3603.....	2-6
CN-3605.....	2-6
CN-3606.....	2-6
CN-3607.....	2-7
CN-3616.....	2-7
CN-3617.....	2-7
CN-3624.....	2-7
DPR-351.....	2-8
IF-1231.....	2-22
IF-1262.....	2-23
LE-391.....	2-24
SW-1592.....	2-24
SW-1592A.....	2-25
SW-1594.....	2-26
SW-1595.....	2-26
SY-427.....	2-27
TX-146.....	2-41

3. Board Layouts

AT-189.....	3-1
CN-3601.....	3-1
CN-3602.....	3-1
CN-3603.....	3-2
CN-3605.....	3-2
CN-3606.....	3-2
CN-3607.....	3-2
CN-3616.....	3-2
CN-3617.....	3-2
CN-3624.....	3-3

DPR-351.....3-4

IF-1231.....3-5

IF-1262.....3-5

LE-391.....3-5

SW-1592/1592A.....3-5

SW-1594.....3-5

SW-1595.....3-6

SY-427.....3-7

TX-146.....3-8

Board Parts Location.....3-9

Manual Structure

Purpose of this manual

This manual describes the information items that premise the service based on the components parts such as parts list, schematic diagrams, and board layouts, assuming use of system engineers and service engineers.

For the safety precautions, refer to the Service Manual provided separately from this Factory Service Manual.

Related manuals

The following manual is provided for this unit in addition to this “Factory Service Manual”.

- Operation Guide (Supplied with this unit)
- Operation Manual CD-ROM (Supplied with this unit)
This manual contains information required to operate and use the unit.
- Installation Manual (Available on request)
This manual describes the information on installing the unit.
- Service Manual (Available on request)
This manual describes service overview, replacement of main parts, and etc. of the unit to provide information required for block-level service.

Trademarks

Trademarks and registered trademarks used in this manual are follows.

- FRAM is a registered trademark of Ramtron International Corporation.

Other system names and product names written in this manual are usually registered trademarks or trademarks of respective development manufacturers.

Non-disclosed boards

Replacement in units of mount boards or mount components is not possible for boards shown below. Therefore, their circuit diagrams, mount drawings, and components lists are not disclosed.

- PS-869
- PS-869B
- PS-874
- RE-313
- RE-313B

Board names

In this Factory Service Manual, board names are described as follows in some cases.

- AT-189S board: Described as AT-189 board
- TX-146A board: Described as TX-146 board

Section 1

Spare Parts

1-1. Note on Repair Parts

1. Safety Related Components Warning

WARNING

Components marked $\triangle$ are critical to safe operation. Therefore, specified parts should be used in the case of replacement.

2. Standardization of Parts

Some repair parts supplied by Sony differ from those used for the unit. These are because of parts commonality and improvement.

3. Stock of Parts

Parts marked with “o” at SP (Supply Code) column of the spare parts list may not be stocked. Therefore, the delivery date will be delayed.

4. Harness

Harnesses with no part number are not registered as spare parts.

1. 安全重要部品

$\triangle$ 警告

$\triangle$ 印のついた部品は安全性を維持するために重要な部品です。したがって、交換する時は必ず指定の部品を使ってください。

2. 部品の共通化

ソニーから供給する補修用部品は、セットに使われているものと異なることがあります。これは部品の共通化、改良等によるものです。

3. 部品の在庫

部品表の SP (Supply code) 欄に “o” で示される部品は在庫していないことがあります。納期が長くなる場合があります。

4. ハーネス

部品番号の記載されていないハーネスは、サービス部品として登録されていません。

AT-189/189S BOARD

Ref. No. or Q'ty	Part No.	SP Description
CN100	1-818-655-21 s	CONNECTOR, BOARD TO BOARD 120P
FB100	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB101	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB102	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB300	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB304	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB400	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB401	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FL100	1-234-939-21 s	FILTER, EMI REMOVAL (SMD)
FL101	1-234-939-21 s	FILTER, EMI REMOVAL (SMD)
FL300	1-234-939-21 s	FILTER, EMI REMOVAL (SMD)
FL301	1-234-939-21 s	FILTER, EMI REMOVAL (SMD)
FL302	1-234-939-21 s	FILTER, EMI REMOVAL (SMD)
FL400	1-234-939-21 s	FILTER, EMI REMOVAL (SMD)
FL401	1-234-939-21 s	FILTER, EMI REMOVAL (SMD)
FL402	1-234-939-21 s	FILTER, EMI REMOVAL (SMD)
IC100	6-706-220-01 s	IC LTC3411EMS#TR
IC101	6-706-220-01 s	IC LTC3411EMS#TR
IC102	6-712-135-01 o	IC R1173H001D-T1-FE
IC103	6-712-135-01 o	IC R1173H001D-T1-FE
IC111	8-759-598-43 s	IC TC7WH04FK
IC112	6-704-566-01 s	IC R3112N291A-TR-FE
IC113	6-710-943-01 s	IC TC74VHC164FK(EL,K)
IC300	6-715-036-01 s	IC TC7SZ04FU,RSonyJ
IC301	6-715-039-01 s	IC TC7SZ08FU,RSonyJ
IC303	6-715-036-01 s	IC TC7SZ04FU,RSonyJ
IC305	6-715-036-01 s	IC TC7SZ04FU,RSonyJ
IC309	6-715-039-01 s	IC TC7SZ08FU,RSonyJ
IC310	6-715-039-01 s	IC TC7SZ08FU,RSonyJ
IC311	6-715-039-01 s	IC TC7SZ08FU,RSonyJ
IC401	6-719-918-01 o	IC THGBM5G5A1JBair
L100	1-419-630-21 s	COIL, CHOKE 4.7UH
L101	1-419-630-21 s	COIL, CHOKE 4.7UH
Q100	8-729-928-91 s	TRANSISTOR DTC114EE-TL
Q101	8-729-928-91 s	TRANSISTOR DTC114EE-TL
R100	1-208-927-81 s	RES, CHIP 47K (1005)
R101	1-208-923-81 s	RES, CHIP 33K (1005)
R102	1-208-927-81 s	RES, CHIP 47K (1005)
R103	1-208-923-81 s	RES, CHIP 33K (1005)
R106	1-208-935-81 s	RES, CHIP 100K (1005)
R107	1-208-943-81 s	RES, CHIP 220K (1005)
R108	1-208-935-81 s	RES, CHIP 100K (1005)
R109	1-208-943-81 s	RES, CHIP 220K (1005)
R110	1-208-911-81 s	RES, CHIP 10K (1005)
R114	1-208-919-81 s	RES, CHIP 22K (1005)
R115	1-208-887-81 s	RES, CHIP 1.0K (1005)
R116	1-208-911-81 s	RES, CHIP 10K (1005)
R117	1-208-895-81 s	RES, CHIP 2.2K (1005)
R118	1-208-903-81 s	RES, CHIP 4.7K (1005)
R119	1-208-911-81 s	RES, CHIP 10K (1005)
R120	1-208-911-81 s	RES, CHIP 10K (1005)
R121	1-208-935-81 s	RES, CHIP 100K (1005)
R122	1-208-919-81 s	RES, CHIP 22K (1005)
R123	1-208-935-81 s	RES, CHIP 100K (1005)
R124	1-208-919-81 s	RES, CHIP 22K (1005)
R125	1-208-927-81 s	RES, CHIP 47K (1005)
R132	1-208-943-81 s	RES, CHIP 220K (1005)
R133	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R135	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R137	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R139	1-208-927-81 s	RES, CHIP 47K (1005)
R140	1-208-919-81 s	RES, CHIP 22K (1005)
R141	1-208-951-81 s	RES, CHIP 470K (1005)

AT-189/189S BOARD

Ref. No. or Q'ty	Part No.	SP Description
R142	1-208-911-81 s	RES, CHIP 10K (1005)
R144	1-208-943-81 s	RES, CHIP 220K (1005)
R146	1-208-935-81 s	RES, CHIP 100K (1005)
R147	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R149	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R200	1-208-855-81 s	RES, CHIP 47 (1005)
R201	1-208-855-81 s	RES, CHIP 47 (1005)
R202	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R203	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R204	1-208-863-81 s	RES, CHIP 100 (1005)
R205	1-220-878-81 s	RES, CHIP 22 (1005)
R206	1-208-911-81 s	RES, CHIP 10K (1005)
R207	1-208-903-81 s	RES, CHIP 4.7K (1005)
R208	1-208-903-81 s	RES, CHIP 4.7K (1005)
R209	1-208-903-81 s	RES, CHIP 4.7K (1005)
R210	1-208-903-81 s	RES, CHIP 4.7K (1005)
R211	1-220-878-81 s	RES, CHIP 22 (1005)
R212	1-220-878-81 s	RES, CHIP 22 (1005)
R213	1-220-878-81 s	RES, CHIP 22 (1005)
R214	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R215	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R216	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R217	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R218	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R219	1-208-863-81 s	RES, CHIP 100 (1005)
R220	1-208-863-81 s	RES, CHIP 100 (1005)
R221	1-208-863-81 s	RES, CHIP 100 (1005)
R222	1-208-863-81 s	RES, CHIP 100 (1005)
R223	1-208-863-81 s	RES, CHIP 100 (1005)
R224	1-208-863-81 s	RES, CHIP 100 (1005)
R226	1-208-863-81 s	RES, CHIP 100 (1005)
R227	1-220-878-81 s	RES, CHIP 22 (1005)
R228	1-220-878-81 s	RES, CHIP 22 (1005)
R229	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R230	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R231	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R232	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R233	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R234	1-208-911-81 s	RES, CHIP 10K (1005)
R235	1-208-911-81 s	RES, CHIP 10K (1005)
R236	1-208-855-81 s	RES, CHIP 47 (1005)
R237	1-208-855-81 s	RES, CHIP 47 (1005)
R245	1-208-863-81 s	RES, CHIP 100 (1005)
R304	1-208-863-81 s	RES, CHIP 100 (1005)
R305	1-208-863-81 s	RES, CHIP 100 (1005)
R306	1-208-863-81 s	RES, CHIP 100 (1005)
R307	1-208-863-81 s	RES, CHIP 100 (1005)
R308	1-208-863-81 s	RES, CHIP 100 (1005)
R310	1-208-863-81 s	RES, CHIP 100 (1005)
R312	1-208-911-81 s	RES, CHIP 10K (1005)
R313	1-208-911-81 s	RES, CHIP 10K (1005)
R314	1-208-911-81 s	RES, CHIP 10K (1005)
R315	1-208-911-81 s	RES, CHIP 10K (1005)
R316	1-208-911-81 s	RES, CHIP 10K (1005)
R317	1-208-911-81 s	RES, CHIP 10K (1005)
R319	1-208-911-81 s	RES, CHIP 10K (1005)
R320	1-208-911-81 s	RES, CHIP 10K (1005)
R321	1-208-863-81 s	RES, CHIP 100 (1005)
R322	1-208-863-81 s	RES, CHIP 100 (1005)
R323	1-208-863-81 s	RES, CHIP 100 (1005)
R324	1-208-863-81 s	RES, CHIP 100 (1005)
R325	1-208-863-81 s	RES, CHIP 100 (1005)
R326	1-208-863-81 s	RES, CHIP 100 (1005)
R327	1-208-863-81 s	RES, CHIP 100 (1005)
R328	1-208-863-81 s	RES, CHIP 100 (1005)

AT-189/189S BOARD

Ref. No. or Q'ty	Part No.	SP Description
R329	1-208-891-81 s	RES, CHIP 1.5K (1005)
R330	1-208-891-81 s	RES, CHIP 1.5K (1005)
R331	1-208-855-81 s	RES, CHIP 47 (1005)
R332	1-220-878-81 s	RES, CHIP 22 (1005)
R333	1-208-855-81 s	RES, CHIP 47 (1005)
R334	1-208-855-81 s	RES, CHIP 47 (1005)
R335	1-208-863-81 s	RES, CHIP 100 (1005)
R336	1-208-863-81 s	RES, CHIP 100 (1005)
R337	1-208-863-81 s	RES, CHIP 100 (1005)
R338	1-208-911-81 s	RES, CHIP 10K (1005)
R340	1-208-903-81 s	RES, CHIP 4.7K (1005)
R341	1-208-863-81 s	RES, CHIP 100 (1005)
R342	1-208-863-81 s	RES, CHIP 100 (1005)
R343	1-208-863-81 s	RES, CHIP 100 (1005)
R344	1-208-863-81 s	RES, CHIP 100 (1005)
R345	1-208-863-81 s	RES, CHIP 100 (1005)
R346	1-208-903-81 s	RES, CHIP 4.7K (1005)
R347	1-208-903-81 s	RES, CHIP 4.7K (1005)
R349	1-208-863-81 s	RES, CHIP 100 (1005)
R350	1-208-863-81 s	RES, CHIP 100 (1005)
R351	1-208-863-81 s	RES, CHIP 100 (1005)
R352	1-208-863-81 s	RES, CHIP 100 (1005)
R353	1-208-863-81 s	RES, CHIP 100 (1005)
R354	1-208-863-81 s	RES, CHIP 100 (1005)
R400	1-220-878-81 s	RES, CHIP 22 (1005)
R401	1-220-878-81 s	RES, CHIP 22 (1005)
R402	1-220-878-81 s	RES, CHIP 22 (1005)
R403	1-220-878-81 s	RES, CHIP 22 (1005)
R404	1-220-878-81 s	RES, CHIP 22 (1005)
R405	1-220-878-81 s	RES, CHIP 22 (1005)
R406	1-220-878-81 s	RES, CHIP 22 (1005)
R407	1-220-878-81 s	RES, CHIP 22 (1005)
R408	1-220-878-81 s	RES, CHIP 22 (1005)
R409	1-220-878-81 s	RES, CHIP 22 (1005)
R410	1-220-878-81 s	RES, CHIP 22 (1005)
R411	1-220-878-81 s	RES, CHIP 22 (1005)
R412	1-208-871-81 s	RES, CHIP 220 (1005)
R414	1-220-878-81 s	RES, CHIP 22 (1005)
R415	1-220-878-81 s	RES, CHIP 22 (1005)
R416	1-220-878-81 s	RES, CHIP 22 (1005)
R417	1-220-878-81 s	RES, CHIP 22 (1005)
R418	1-220-878-81 s	RES, CHIP 22 (1005)
R419	1-220-878-81 s	RES, CHIP 22 (1005)
R420	1-220-878-81 s	RES, CHIP 22 (1005)
R421	1-220-878-81 s	RES, CHIP 22 (1005)
R422	1-220-878-81 s	RES, CHIP 22 (1005)
R423	1-220-878-81 s	RES, CHIP 22 (1005)
R424	1-220-878-81 s	RES, CHIP 22 (1005)
R425	1-220-878-81 s	RES, CHIP 22 (1005)
R426	1-208-871-81 s	RES, CHIP 220 (1005)
R428	1-208-863-81 s	RES, CHIP 100 (1005)
R429	1-220-878-81 s	RES, CHIP 22 (1005)
R430	1-220-878-81 s	RES, CHIP 22 (1005)
R432	1-208-887-81 s	RES, CHIP 1.0K (1005)
R433	1-208-887-81 s	RES, CHIP 1.0K (1005)
R440	1-220-870-81 s	RES, CHIP 10 (1005)
R441	1-220-870-81 s	RES, CHIP 10 (1005)
R442	1-220-870-81 s	RES, CHIP 10 (1005)
R443	1-220-870-81 s	RES, CHIP 10 (1005)
RB200	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB201	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB202	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB203	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB204	1-234-371-21 s	RES, NETWORK 47 (1005X4)

AT-189/189S BOARD

Ref. No. or Q'ty	Part No.	SP Description
RB205	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB302	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB303	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB310	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB311	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB312	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB313	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB314	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB315	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB316	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB317	1-234-377-21 s	RES, NETWORK 4.7K (1005X4)
RB401	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB411	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB412	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB413	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB414	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB415	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB416	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB417	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB418	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB419	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB420	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB421	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB422	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB423	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB424	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB425	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB426	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB430	1-234-370-21 s	RES, NETWORK 22 (1005X4)
TP101	1-780-925-11 s	TERMINAL, LUG
TP102	1-780-925-11 s	TERMINAL, LUG
X300	1-814-322-11 s	QUARTZ CRYSTAL UNITS (11.2896 MHz)
X301	1-813-205-11 s	VIBRATOR, CRYSTAL (24 MHz)

CN-3601 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1992-437-A s	MOUNTED CIRCUIT BOARD, CN-3601
C001	1-118-044-11 s	CAP, CERAMIC 1MF X5R (2012)
C002	1-118-044-11 s	CAP, CERAMIC 1MF X5R (2012)
C003	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C004	1-118-403-11 s	CAP, CERAMIC 1000PF X7R 1005
C005	1-118-403-11 s	CAP, CERAMIC 1000PF X7R 1005
C006	1-118-403-11 s	CAP, CERAMIC 1000PF X7R 1005
C007	1-118-403-11 s	CAP, CERAMIC 1000PF X7R 1005
C008	1-118-403-11 s	CAP, CERAMIC 1000PF X7R 1005
C009	1-118-403-11 s	CAP, CERAMIC 1000PF X7R 1005
C010	1-118-403-11 s	CAP, CERAMIC 1000PF X7R 1005
C011	1-118-403-11 s	CAP, CERAMIC 1000PF X7R 1005
C012	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C013	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C014	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C015	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C016	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C017	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C018	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C019	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C020	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C021	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C022	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005

CN-3601 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C023	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C024	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C025	1-164-882-81 s	CAP,CHIP CERAMIC 220PF CH 1005
C026	1-164-882-81 s	CAP,CHIP CERAMIC 220PF CH 1005
C027	1-100-597-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C028	1-100-597-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C029	1-118-399-11 s	CAP, CERAMIC 2200PF X7R 1005
C030	1-118-399-11 s	CAP, CERAMIC 2200PF X7R 1005
C031	1-118-399-11 s	CAP, CERAMIC 2200PF X7R 1005
C032	1-118-399-11 s	CAP, CERAMIC 2200PF X7R 1005
C033	1-118-399-11 s	CAP, CERAMIC 2200PF X7R 1005
C034	1-118-399-11 s	CAP, CERAMIC 2200PF X7R 1005
C035	1-118-399-11 s	CAP, CERAMIC 2200PF X7R 1005
C036	1-118-399-11 s	CAP, CERAMIC 2200PF X7R 1005
CN001	1-785-840-31 s	CONNECTOR, FFC/FPC(ZIF) AN 15P
CN002	1-770-160-21 s	PIN, CONNECTOR (PC BOARD) 2P
CN003	1-565-443-11 o	RECEPTACLE, CONNECTOR 10P
CN004	1-563-929-11 s	CONNECTOR, ROUND TYPE (RF) 4P
CN005	1-562-222-21 s	CONNECTOR, ROUND TYPE 6P
CN006	1-562-221-31 s	CONNECTOR (ROUND TYPE) (R-F) 12P
CN007	1-819-308-21 s	PIN, CONNECTOR 15P
FB001	1-234-518-21 s	ARRAY, FERRITE CHIP
FB002	1-234-518-21 s	ARRAY, FERRITE CHIP
FB003	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB004	1-234-518-21 s	ARRAY, FERRITE CHIP
FB005	1-414-772-21 s	FERRITE. EMI (SMD) (2012)
FB006	1-414-772-21 s	FERRITE. EMI (SMD) (2012)
FB007	1-400-832-21 s	SMD EMI FERRITE
FB008	1-400-832-21 s	SMD EMI FERRITE
FB009	1-400-832-21 s	SMD EMI FERRITE
FB010	1-400-832-21 s	SMD EMI FERRITE
FB011	1-400-832-21 s	SMD EMI FERRITE
FB012	1-400-832-21 s	SMD EMI FERRITE
FB013	1-400-832-21 s	SMD EMI FERRITE
FB014	1-400-832-21 s	SMD EMI FERRITE
FB015	1-400-832-21 s	SMD EMI FERRITE
FB016	1-400-832-21 s	SMD EMI FERRITE
FB017	1-400-832-21 s	SMD EMI FERRITE
IC001	6-714-067-01 s	IC PCA9555DB-T
R001	1-208-855-81 s	RES, CHIP 47 (1005)
R002	1-208-855-81 s	RES, CHIP 47 (1005)
R003	1-208-879-81 s	RES, CHIP 470 (1005)
R004	1-208-879-81 s	RES, CHIP 470 (1005)
R005	1-208-863-81 s	RES, CHIP 100 (1005)
R006	1-208-863-81 s	RES, CHIP 100 (1005)
R007	1-208-863-81 s	RES, CHIP 100 (1005)
R008	1-208-863-81 s	RES, CHIP 100 (1005)
R009	1-208-863-81 s	RES, CHIP 100 (1005)
R010	1-208-887-81 s	RES, CHIP 1.0K (1005)
R011	1-208-887-81 s	RES, CHIP 1.0K (1005)
R012	1-208-887-81 s	RES, CHIP 1.0K (1005)
R013	1-208-887-81 s	RES, CHIP 1.0K (1005)
R014	1-208-895-81 s	RES, CHIP 2.2K (1005)
S001	1-570-607-11 s	SWITCH, TOGGLE
S002	1-570-853-11 s	SWITCH, SLIDE
TH001	△ 1-811-201-11 s	THERMISTOR, POSITIVE
THP001	△ 1-802-108-11 s	THERMISTOR, POSITIVE
THP002	△ 1-802-108-11 s	THERMISTOR, POSITIVE

CN-3602 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1992-438-A s	MOUNTED CIRCUIT BOARD, CN-3602
C1	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C2	1-118-399-11 s	CAP, CERAMIC 2200PF X7R 1005
C3	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C4	1-118-399-11 s	CAP, CERAMIC 2200PF X7R 1005
C5	1-118-399-11 s	CAP, CERAMIC 2200PF X7R 1005
C6	1-118-399-11 s	CAP, CERAMIC 2200PF X7R 1005
C8	1-118-399-11 s	CAP, CERAMIC 2200PF X7R 1005
C9	1-116-865-11 s	CAP, CERAMIC 10MF X5R 3216
C10	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
CN1	1-816-041-12 s	CONNECTOR, ROUND TYPE 20P
CN2	1-816-113-21 s	CONNECTOR 15P
FB1	1-414-772-21 s	FERRITE. EMI (SMD) (2012)
FB2	1-414-772-21 s	FERRITE. EMI (SMD) (2012)
FB3	1-400-832-21 s	SMD EMI FERRITE
FB4	1-400-832-21 s	SMD EMI FERRITE
FB5	1-400-832-21 s	SMD EMI FERRITE
FB6	1-400-832-21 s	SMD EMI FERRITE
FB7	1-400-832-21 s	SMD EMI FERRITE
FB8	1-400-832-21 s	SMD EMI FERRITE
FB10	1-400-832-21 s	SMD EMI FERRITE
FB11	1-400-832-21 s	SMD EMI FERRITE
FB12	1-400-832-21 s	SMD EMI FERRITE
FB13	1-400-832-21 s	SMD EMI FERRITE
R1	1-218-990-81 s	CONDUCTOR, CHIP (1005)
THP001	△ 1-811-201-11 s	THERMISTOR, POSITIVE

CN-3603 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1992-439-A s	MOUNTED CIRCUIT BOARD, CN-3603
C1	1-118-395-11 s	CAP, CERAMIC 4700PF X7R 1005
C2	1-118-395-11 s	CAP, CERAMIC 4700PF X7R 1005
CN1	1-770-626-21 s	PIN, CONNECTOR 9P
CN2	1-766-696-11 o	CONNECTOR, ROUND TYPE 8P
FB1	1-234-518-21 s	ARRAY, FERRITE CHIP
FB2	1-400-832-21 s	SMD EMI FERRITE
FB3	1-400-832-21 s	SMD EMI FERRITE
FB4	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB5	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB6	1-469-094-21 s	FERRITE, EMI (SMD) (1608)

CN-3605 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1992-440-A s	MOUNTED CIRCUIT BOARD, CN-3605
C1	1-114-236-21 s	CAP, CERAMIC 22MF B (3225)
C2	1-100-597-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C3	1-100-597-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
CN1	1-820-882-11 s	CONNECTOR (RECEPTACLE), XLR
CN2	1-580-533-11 s	PIN, CONNECTOR (PC BOARD) 8P
FB1	1-414-772-21 s	FERRITE. EMI (SMD) (2012)

CN-3605 BOARD

Ref. No. or Q'ty	Part No.	SP Description
FB2	1-414-772-21 s	FERRITE. EMI (SMD) (2012)
FB3	1-414-772-21 s	FERRITE. EMI (SMD) (2012)
FB4	1-414-772-21 s	FERRITE. EMI (SMD) (2012)
FB5	1-414-772-21 s	FERRITE. EMI (SMD) (2012)
FB6	1-414-772-21 s	FERRITE. EMI (SMD) (2012)
FB7	1-414-772-21 s	FERRITE. EMI (SMD) (2012)
FB8	1-414-772-21 s	FERRITE. EMI (SMD) (2012)

CN-3606 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1992-441-A s	MOUNTED CIRCUIT BOARD, CN-3606
C1	1-114-214-81 s	CAP,CHIP CERAMIC470PF CH1005
C2	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C3	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
CN1	1-784-602-11 s	CONNECTOR, XLR (RECEPTACLE) 5P
CN2	1-779-806-21 s	CONNECTOR 8P
ET1	1-780-569-11 s	TERMINAL (ON BOARD CONTACT)
FB1	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB2	1-414-445-21 s	FERRITE, EMI (SMD) (1608)
FB3	1-414-445-21 s	FERRITE, EMI (SMD) (1608)
L1	1-457-165-21 s	COMMON MODE CHOKE COIL

CN-3607 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1992-442-A s	MOUNTED CIRCUIT BOARD, CN-3607
CN1	1-573-594-12 s	CONNECTOR, XLR TYPE 3P
CN3	1-785-946-21 s	CONNECTOR 3P
ET1	1-780-569-11 s	TERMINAL (ON BOARD CONTACT)
FB1	1-469-112-21 s	FERRITE, EMI (SMD) (1608)
FB2	1-469-112-21 s	FERRITE, EMI (SMD) (1608)
JC1	1-216-864-91 s	CONDUCTOR, CHIP (1608)
JC2	1-216-864-91 s	CONDUCTOR, CHIP (1608)

CN-3616 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1990-799-A s	MOUNTED CIRCUIT BOARD, CN-3616
C001	1-100-597-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C002	1-100-597-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C003	1-114-236-21 s	CAP, CERAMIC 22MF B (3225)
CN001	1-794-959-21 o	PIN, CONNECTOR (PWB, PRINT)20P
CN002	1-820-886-11 s	CONNECTOR (RECEPTACLE), XLR
D001	6-501-358-01 s	DIODE CL-197HG5-CD-T
FB001	1-414-772-21 s	FERRITE. EMI (SMD) (2012)
FB002	1-414-772-21 s	FERRITE. EMI (SMD) (2012)
FB003	1-414-772-21 s	FERRITE. EMI (SMD) (2012)
FB004	1-414-772-21 s	FERRITE. EMI (SMD) (2012)

CN-3616 BOARD

Ref. No. or Q'ty	Part No.	SP Description
FB005	1-414-772-21 s	FERRITE. EMI (SMD) (2012)
FB006	1-414-772-21 s	FERRITE. EMI (SMD) (2012)
FB007	1-414-772-21 s	FERRITE. EMI (SMD) (2012)
FB008	1-414-772-21 s	FERRITE. EMI (SMD) (2012)
R001	1-208-887-81 s	RES, CHIP 1.0K (1005)

CN-3617 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1990-800-A s	MOUNTED CIRCUIT BOARD, CN-3617
C001	1-100-597-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C002	1-100-597-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C003	1-114-236-21 s	CAP, CERAMIC 22MF B (3225)
CN001	1-580-559-11 o	PIN, CONNECTOR (PC BOARD) 8P
CN002	1-820-886-11 s	CONNECTOR (RECEPTACLE), XLR
FB001	1-414-772-21 s	FERRITE. EMI (SMD) (2012)
FB002	1-414-772-21 s	FERRITE. EMI (SMD) (2012)
FB003	1-414-772-21 s	FERRITE. EMI (SMD) (2012)
FB004	1-414-772-21 s	FERRITE. EMI (SMD) (2012)
FB005	1-414-772-21 s	FERRITE. EMI (SMD) (2012)
FB006	1-414-772-21 s	FERRITE. EMI (SMD) (2012)
FB007	1-414-772-21 s	FERRITE. EMI (SMD) (2012)
FB008	1-414-772-21 s	FERRITE. EMI (SMD) (2012)

CN-3624 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1992-433-A s	MOUNTED CIRCUIT BOARD, CN-3624
CN100	1-817-456-21 s	CONNECTOR, COAXIAL
CN101	1-750-005-21 o	PIN, CONNECTOR (PC BOARD) 4P
CN103	1-770-622-21 s	PIN, CONNECTOR 5P
CN104	1-770-622-21 s	PIN, CONNECTOR 5P
FB100	1-500-456-21 s	ARRAY, FERRITE CHIP
L100	1-457-057-21 s	COIL, COMMON MODE CHOKE
L101	1-457-057-21 s	COIL, COMMON MODE CHOKE
L102	1-457-057-21 s	COIL, COMMON MODE CHOKE
L103	1-457-057-21 s	COIL, COMMON MODE CHOKE
L104	1-457-057-21 s	COIL, COMMON MODE CHOKE
L105	1-457-057-21 s	COIL, COMMON MODE CHOKE
TH100	△ 1-811-201-11 s	THERMISTOR, POSITIVE
TP100	1-780-431-11 o	ON-BOARD CONTACT

DPR-351 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1992-429-A s	MOUNTED CIRCUIT BOARD, DPR-351
3pcs	3-729-061-02 s	SCREW (M2) (TYPE 1)
2pcs	4-287-222-01 s	UL TAPE _W10L25
C001	1-118-399-11 s	CAP, CERAMIC 2200PF X7R 1005
C002	1-118-399-11 s	CAP, CERAMIC 2200PF X7R 1005

DPR-351 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C003	1-118-395-11 s	CAP, CERAMIC 4700PF X7R 1005
C004	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C005	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C006	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C007	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C008	1-164-858-81 s	CAP, CHIP CERAMIC 22PF CH 1005
C009	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C010	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C011	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C012	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C013	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C014	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C015	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C016	1-116-734-11 s	CAP, CERAMIC 1MF X5R 1608
C018	1-114-214-81 s	CAP,CHIP CERAMIC470PF CH1005
C021	1-114-548-11 s	CAP, NIOBIUM ELECT 22UF
C023	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C025	1-164-882-81 s	CAP,CHIP CERAMIC 220PF CH 1005
C026	1-164-882-81 s	CAP,CHIP CERAMIC 220PF CH 1005
C027	1-164-882-81 s	CAP,CHIP CERAMIC 220PF CH 1005
C030	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C031	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C032	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C033	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C034	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C035	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C036	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C037	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C038	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C039	1-164-936-81 s	CAP, CHIP CERAMIC 680PF B 1005
C040	1-164-936-81 s	CAP, CHIP CERAMIC 680PF B 1005
C041	1-164-936-81 s	CAP, CHIP CERAMIC 680PF B 1005
C042	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C043	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C044	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C045	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C046	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C047	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C048	1-116-734-11 s	CAP, CERAMIC 1MF X5R 1608
C049	1-116-734-11 s	CAP, CERAMIC 1MF X5R 1608
C050	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C051	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C052	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C055	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C056	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C057	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C058	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C059	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C063	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C065	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C066	1-112-916-11 s	CAP, NIOBIUM ELECT 47MF 105
C067	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C068	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C069	1-114-548-11 s	CAP, NIOBIUM ELECT 22UF
C070	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C071	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C072	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C073	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C074	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C075	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C079	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C083	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C087	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C088	1-118-395-11 s	CAP, CERAMIC 4700PF X7R 1005
C089	1-112-916-11 s	CAP, NIOBIUM ELECT 47MF 105

DPR-351 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C090	1-112-916-11 s	CAP, NIOBIUM ELECT 47MF 105
C091	1-164-858-81 s	CAP, CHIP CERAMIC 22PF CH 1005
C092	1-164-882-81 s	CAP,CHIP CERAMIC 220PF CH 1005
C093	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C094	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C097	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C098	1-164-850-81 s	CAP, CHIP CERAMIC 10PF CH 1005
C099	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C100	1-114-214-81 s	CAP,CHIP CERAMIC470PF CH1005
C101	1-114-214-81 s	CAP,CHIP CERAMIC470PF CH1005
C103	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C104	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C105	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C106	1-164-882-81 s	CAP,CHIP CERAMIC 220PF CH 1005
C107	1-116-734-11 s	CAP, CERAMIC 1MF X5R 1608
C108	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C109	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C110	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C112	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C113	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C114	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C115	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C116	1-164-936-81 s	CAP, CHIP CERAMIC 680PF B 1005
C117	1-164-936-81 s	CAP, CHIP CERAMIC 680PF B 1005
C118	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C119	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C120	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C121	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C122	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C123	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C124	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C125	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C126	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C127	1-116-734-11 s	CAP, CERAMIC 1MF X5R 1608
C128	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C129	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C130	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C133	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C134	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C137	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C138	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C141	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C146	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C147	1-114-214-81 s	CAP,CHIP CERAMIC470PF CH1005
C148	1-116-738-11 o	CAP, CERAMIC 1MF X6S 1005
C149	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C150	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C151	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C152	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C153	1-116-738-11 o	CAP, CERAMIC 1MF X6S 1005
C154	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C155	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C156	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C157	1-164-936-81 s	CAP, CHIP CERAMIC 680PF B 1005
C158	1-164-850-81 s	CAP, CHIP CERAMIC 10PF CH 1005
C159	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C160	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C161	1-118-399-11 s	CAP, CERAMIC 2200PF X7R 1005
C162	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C163	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C164	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C165	1-118-399-11 s	CAP, CERAMIC 2200PF X7R 1005
C168	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C170	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C171	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005

DPR-351 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C646	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C648	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C649	1-164-845-81 s	CAP, CHIP CERAMIC 5PF CH 1005
C650	1-164-845-81 s	CAP, CHIP CERAMIC 5PF CH 1005
C651	1-164-845-81 s	CAP, CHIP CERAMIC 5PF CH 1005
C652	1-164-854-81 s	CAP, CHIP CERAMIC 15PF CH 1005
C654	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C655	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C656	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C657	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C658	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C659	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C660	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C661	1-164-848-81 s	CAP, CHIP CERAMIC 8PF CH 1005
C662	1-164-866-81 s	CAP, CHIP CERAMIC 47PF CH 1005
C663	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C664	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C665	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C666	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C668	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C669	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C670	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C671	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C672	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C673	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C674	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C675	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C676	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C677	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C678	1-164-848-81 s	CAP, CHIP CERAMIC 8PF CH 1005
C679	1-164-866-81 s	CAP, CHIP CERAMIC 47PF CH 1005
C680	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C681	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C682	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C683	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C684	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C685	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C686	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C687	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C688	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C690	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C691	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C692	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C693	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C694	1-164-840-81 s	CAP, CHIP CERAMIC 1PF CK 1005
C696	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C697	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C698	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C699	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C703	1-116-738-11 o	CAP, CERAMIC 1MF X6S 1005
C704	1-164-862-81 s	CAP, CHIP CERAMIC 33PF CH 1005
C705	1-164-860-81 s	CAP, CHIP CERAMIC 27PF CH 1005
C707	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C708	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C709	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C710	1-164-862-81 s	CAP, CHIP CERAMIC 33PF CH 1005
C711	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C712	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C713	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C714	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C715	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C716	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C717	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C718	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C719	1-164-850-81 s	CAP, CHIP CERAMIC 10PF CH 1005

DPR-351 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C720	1-164-850-81 s	CAP, CHIP CERAMIC 10PF CH 1005
C721	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C722	1-100-573-81 s	CAP,CHIP CERAMIC 390PF B 1005
C723	1-164-845-81 s	CAP, CHIP CERAMIC 5PF CH 1005
C724	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C725	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C726	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C727	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C728	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C729	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C730	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C731	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C732	1-116-738-11 o	CAP, CERAMIC 1MF X6S 1005
C733	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C734	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C735	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C736	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C737	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C738	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C739	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C740	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C741	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C742	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C743	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C744	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C745	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C746	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C747	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C748	1-164-850-81 s	CAP, CHIP CERAMIC 10PF CH 1005
C749	1-164-844-81 s	CAP, CHIP CERAMIC 4PF CH 1005
C750	1-164-852-81 s	CAP, CHIP CERAMIC 12PF CH 1005
C751	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C752	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C753	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C801	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C802	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C803	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C804	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C805	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C806	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C807	1-114-548-11 s	CAP, NIOBIUM ELECT 22UF
C809	1-127-956-21 s	CAP, CHIP FILM 0.1MF (3225)
C810	1-114-548-11 s	CAP, NIOBIUM ELECT 22UF
C812	1-127-956-21 s	CAP, CHIP FILM 0.1MF (3225)
C813	1-127-956-21 s	CAP, CHIP FILM 0.1MF (3225)
C814	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C815	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C816	1-127-956-21 s	CAP, CHIP FILM 0.1MF (3225)
C817	1-127-950-21 s	CAP, CHIP FILM 0.01MF (2012)
C818	1-127-950-21 s	CAP, CHIP FILM 0.01MF (2012)
C819	1-116-738-11 o	CAP, CERAMIC 1MF X6S 1005
C820	1-116-738-11 o	CAP, CERAMIC 1MF X6S 1005
C821	1-116-738-11 o	CAP, CERAMIC 1MF X6S 1005
C822	1-116-738-11 o	CAP, CERAMIC 1MF X6S 1005
C823	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C824	1-116-738-11 o	CAP, CERAMIC 1MF X6S 1005
C825	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C826	1-116-738-11 o	CAP, CERAMIC 1MF X6S 1005
C827	1-116-738-11 o	CAP, CERAMIC 1MF X6S 1005
C828	1-116-738-11 o	CAP, CERAMIC 1MF X6S 1005
C829	1-116-738-11 o	CAP, CERAMIC 1MF X6S 1005
C830	1-116-738-11 o	CAP, CERAMIC 1MF X6S 1005
C831	1-116-738-11 o	CAP, CERAMIC 1MF X6S 1005
C832	1-116-738-11 o	CAP, CERAMIC 1MF X6S 1005
C833	1-116-738-11 o	CAP, CERAMIC 1MF X6S 1005

DPR-351 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C834	1-116-738-11 o	CAP, CERAMIC 1MF X6S 1005
C835	1-116-738-11 o	CAP, CERAMIC 1MF X6S 1005
C836	1-116-738-11 o	CAP, CERAMIC 1MF X6S 1005
C837	1-116-738-11 o	CAP, CERAMIC 1MF X6S 1005
C838	1-116-738-11 o	CAP, CERAMIC 1MF X6S 1005
C839	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C840	1-116-738-11 o	CAP, CERAMIC 1MF X6S 1005
C841	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C844	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C845	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C846	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C847	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C848	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C849	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C850	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C851	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C852	1-116-738-11 o	CAP, CERAMIC 1MF X6S 1005
C853	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C854	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C855	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C857	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C858	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C859	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
CN101	1-793-141-21 s	PIN, CONNECTOR (PC BOARD) 15P
CN102	1-779-522-31 s	CONNECTOR, FFC/FPC(ZIF) AN 40P
CN103	1-779-522-31 s	CONNECTOR, FFC/FPC(ZIF) AN 40P
CN202	1-764-243-31 o	CONNECTOR (COAXIAL)
CN203	1-818-655-21 s	CONNECTOR, BOARD TO BOARD 120P
CN401	1-817-456-21 s	CONNECTOR, COAXIAL
CN601	1-764-243-31 o	CONNECTOR (COAXIAL)
CN602	1-764-243-31 o	CONNECTOR (COAXIAL)
CN701	1-784-254-21 s	CONNECTOR 10P
D101	8-719-083-60 s	DI UDZSUSTE-174.7B
D102	8-719-083-60 s	DI UDZSUSTE-174.7B
D103	8-719-056-48 s	DI 1SS388
D104	6-502-598-01 s	DI SML-D12U8WT86
D105	6-502-197-01 s	DI SML-D12M8WT86SM
D106	6-502-197-01 s	DI SML-D12M8WT86SM
D107	8-719-074-31 s	DIODE CL-196YG-CD-T
D301	6-502-197-01 s	DI SML-D12M8WT86SM
D302	6-502-598-01 s	DI SML-D12U8WT86
D401	6-501-436-01 s	DIODE SML412BC6TT86
D402	6-501-436-01 s	DIODE SML412BC6TT86
D403	6-501-436-01 s	DIODE SML412BC6TT86
D404	6-501-436-01 s	DIODE SML412BC6TT86
D701	8-719-820-42 s	DIODE 1SS302-TE85L
D702	6-502-197-01 s	DI SML-D12M8WT86SM
D703	8-719-820-42 s	DIODE 1SS302-TE85L
D704	8-719-820-42 s	DIODE 1SS302-TE85L
D705	6-502-598-01 s	DI SML-D12U8WT86
E101	1-535-877-22 s	CHIP, CHECKER
E102	1-535-877-22 s	CHIP, CHECKER
E103	1-535-877-22 s	CHIP, CHECKER
E104	1-535-877-22 s	CHIP, CHECKER
ET201	1-694-974-21 s	CONTACT TERMINAL
ET202	1-694-974-21 s	CONTACT TERMINAL
ET203	1-694-974-21 s	CONTACT TERMINAL
FB101	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB102	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB103	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB104	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB105	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB106	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB107	1-414-864-21 s	FERRITE, EMI (SMD) (1608)

DPR-351 BOARD

Ref. No. or Q'ty	Part No.	SP Description
FB108	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB109	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB110	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB111	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB112	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB113	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB114	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB115	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB116	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB117	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB118	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB119	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB120	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB121	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB122	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB123	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB124	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB125	1-400-580-21 s	FERRITE, EMI (SMD)
FB126	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB127	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB128	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB129	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB130	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB131	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB132	1-400-580-21 s	FERRITE, EMI (SMD)
FB133	1-400-580-21 s	FERRITE, EMI (SMD)
FB134	1-400-580-21 s	FERRITE, EMI (SMD)
FB135	1-400-580-21 s	FERRITE, EMI (SMD)
FB136	1-400-580-21 s	FERRITE, EMI (SMD)
FB137	1-400-580-21 s	FERRITE, EMI (SMD)
FB138	1-400-580-21 s	FERRITE, EMI (SMD)
FB139	1-400-580-21 s	FERRITE, EMI (SMD)
FB140	1-400-580-21 s	FERRITE, EMI (SMD)
FB201	1-481-195-21 s	FERRITE, EMI (SMD)
FB202	1-481-195-21 s	FERRITE, EMI (SMD)
FB203	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB301	1-400-382-21 s	EMI FERRITE (SMD) (1608)
FB302	1-400-382-21 s	EMI FERRITE (SMD) (1608)
FB303	1-400-382-21 s	EMI FERRITE (SMD) (1608)
FB304	1-400-382-21 s	EMI FERRITE (SMD) (1608)
FB305	1-400-382-21 s	EMI FERRITE (SMD) (1608)
FB306	1-400-382-21 s	EMI FERRITE (SMD) (1608)
FB307	1-400-382-21 s	EMI FERRITE (SMD) (1608)
FB308	1-400-382-21 s	EMI FERRITE (SMD) (1608)
FB401	1-481-195-21 s	FERRITE, EMI (SMD)
FB402	1-481-195-21 s	FERRITE, EMI (SMD)
FB403	1-481-195-21 s	FERRITE, EMI (SMD)
FB501	1-400-382-21 s	EMI FERRITE (SMD) (1608)
FB502	1-400-382-21 s	EMI FERRITE (SMD) (1608)
FB503	1-400-382-21 s	EMI FERRITE (SMD) (1608)
FB504	1-400-382-21 s	EMI FERRITE (SMD) (1608)
FB505	1-400-382-21 s	EMI FERRITE (SMD) (1608)
FB506	1-400-382-21 s	EMI FERRITE (SMD) (1608)
FB507	1-400-382-21 s	EMI FERRITE (SMD) (1608)
FB508	1-400-382-21 s	EMI FERRITE (SMD) (1608)
FB601	1-400-832-21 s	SMD EMI FERRITE
FB602	1-400-832-21 s	SMD EMI FERRITE
FB607	1-400-832-21 s	SMD EMI FERRITE
FB608	1-400-832-21 s	SMD EMI FERRITE
FB701	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB702	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB703	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB704	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB705	1-469-094-21 s	FERRITE, EMI (SMD) (1608)

DPR-351 BOARD

Ref. No. or Q'ty	Part No.	SP Description
FL601	1-233-345-21 s	FILTER, LOW PASS (5.5MHZ)
FL602	1-233-345-21 s	FILTER, LOW PASS (5.5MHZ)
FL603	1-813-544-11 s	FILTER, LOW PASS
FL604	1-233-345-21 s	FILTER, LOW PASS (5.5MHZ)
IC101	8-759-327-01 s	IC NJM062V(TE2)
IC102	6-713-169-01 s	IC LTC3412AEFE#TR
IC103	6-713-169-01 s	IC LTC3412AEFE#TR
IC104	6-713-169-01 s	IC LTC3412AEFE#TR
IC106	8-759-327-01 s	IC NJM062V(TE2)
IC107	6-713-169-01 s	IC LTC3412AEFE#TR
IC108	6-704-976-01 s	IC ADR381ARTZ-REEL7
IC110	6-711-915-01 s	IC LM73CIMK-0
IC111	6-715-040-01 o	IC TC7SZ32FU, RSONYJ
IC112	6-715-039-01 s	IC TC7SZ08FU, RSONYJ
IC113	6-711-485-01 s	IC TC74VCX125FK (EL)
IC114	6-715-036-01 s	IC TC7SZ04FU, RSONYJ
IC115	6-715-034-01 s	IC TC7SZ00FU, RSONYJ
IC116	6-715-039-01 s	IC TC7SZ08FU, RSONYJ
IC117	6-715-039-01 s	IC TC7SZ08FU, RSONYJ
IC201	6-713-192-11 s	IC GS2978-CNTE3Z
IC202	6-715-039-01 s	IC TC7SZ08FU, RSONYJ
IC203	6-711-485-01 s	IC TC74VCX125FK (EL)
IC204	6-711-485-01 s	IC TC74VCX125FK (EL)
IC205	6-715-034-01 s	IC TC7SZ00FU, RSONYJ
IC206	6-715-040-01 o	IC TC7SZ32FU, RSONYJ
IC207	6-711-485-01 s	IC TC74VCX125FK (EL)
IC208	6-703-848-01 s	IC SN74CB3T3306DCUR
IC209	6-715-041-01 s	IC TC7SZ125FU, RSOYJ
IC210	6-715-041-01 s	IC TC7SZ125FU, RSOYJ
IC302	6-712-135-01 o	IC R1173H001D-T1-FE
IC402	6-711-751-01 s	IC THC63LVD103D
IC403	6-703-848-01 s	IC SN74CB3T3306DCUR
IC404	6-701-917-01 s	IC TC7PA34FU (TE85R)
IC411	6-715-040-01 o	IC TC7SZ32FU, RSONYJ
IC412	6-715-040-01 o	IC TC7SZ32FU, RSONYJ
IC501	6-712-135-01 o	IC R1173H001D-T1-FE
IC502	6-718-678-01 s	IC W9864G2JH-6I-ER10
IC503	6-718-678-01 s	IC W9864G2JH-6I-ER10
IC601	6-707-997-01 s	IC ADV7320KSTZ
IC602	8-759-561-46 s	IC AD8014ARTZ-REEL7
IC603	8-759-561-46 s	IC AD8014ARTZ-REEL7
IC604	8-759-561-46 s	IC AD8014ARTZ-REEL7
IC605	8-759-561-46 s	IC AD8014ARTZ-REEL7
IC606	6-706-471-01 s	IC THS5661AIPWR
IC607	8-759-561-46 s	IC AD8014ARTZ-REEL7
IC608	6-706-471-01 s	IC THS5661AIPWR
IC609	8-759-561-46 s	IC AD8014ARTZ-REEL7
IC610	8-759-561-46 s	IC AD8014ARTZ-REEL7
IC611	8-759-561-46 s	IC AD8014ARTZ-REEL7
IC613	8-759-287-55 s	IC TC7S66FU (TE85R)
IC614	8-759-675-54 s	IC TC7W53FK (TE85R)
IC615	6-718-382-01 s	IC ML86V76653TBZ0AAL
IC616	8-759-287-55 s	IC TC7S66FU (TE85R)
IC617	8-759-675-54 s	IC TC7W53FK (TE85R)
IC618	8-759-287-55 s	IC TC7S66FU (TE85R)
IC619	6-700-186-01 s	IC GS4981ITA
IC620	6-704-099-01 s	IC TC7W208FK
IC621	6-704-099-01 s	IC TC7W208FK
IC622	8-759-327-14 s	IC TL712CP8R
IC623	8-759-669-66 s	IC TLC272CPWR-12
IC624	8-759-675-54 s	IC TC7W53FK (TE85R)
IC625	8-759-675-54 s	IC TC7W53FK (TE85R)
IC626	8-759-287-55 s	IC TC7S66FU (TE85R)
IC701	8-759-485-24 s	IC MC74HC4046ADTR2
IC702	8-759-485-24 s	IC MC74HC4046ADTR2

DPR-351 BOARD

Ref. No. or Q'ty	Part No.	SP Description
IC703	8-759-675-54 s	IC TC7W53FK (TE85R)
IC704	8-759-675-54 s	IC TC7W53FK (TE85R)
IC705	8-759-675-54 s	IC TC7W53FK (TE85R)
IC706	6-715-035-01 s	IC TC7SZ02FU, RSONYJ
IC707	6-700-831-01 s	IC TC7WZ74FK
IC708	6-702-535-01 s	IC MC100LVEL11DTR2
IC709	6-702-535-01 s	IC MC100LVEL11DTR2
IC716	6-715-040-01 o	IC TC7SZ32FU, RSONYJ
IC718	6-715-040-01 o	IC TC7SZ32FU, RSONYJ
IC719	6-703-238-01 s	IC TC7WZ34FK
IC720	6-715-034-01 s	IC TC7SZ00FU, RSONYJ
IC721	6-715-034-01 s	IC TC7SZ00FU, RSONYJ
IC722	6-715-034-01 s	IC TC7SZ00FU, RSONYJ
IC723	6-703-848-01 s	IC SN74CB3T3306DCUR
IC724	6-715-039-01 s	IC TC7SZ08FU, RSONYJ
IC725	6-711-485-01 s	IC TC74VCX125FK (EL)
IC726	6-715-036-01 s	IC TC7SZ04FU, RSONYJ
IC727	6-715-036-01 s	IC TC7SZ04FU, RSONYJ
IC728	6-715-039-01 s	IC TC7SZ08FU, RSONYJ
IC729	6-711-485-01 s	IC TC74VCX125FK (EL)
IC730	8-759-669-66 s	IC TLC272CPWR-12
IC731	6-706-478-01 s	IC TC7SET08FU
IC732	6-706-478-01 s	IC TC7SET08FU
IC733	8-759-669-66 s	IC TLC272CPWR-12
IC734	6-706-478-01 s	IC TC7SET08FU
IC735	6-706-478-01 s	IC TC7SET08FU
IC736	6-703-848-01 s	IC SN74CB3T3306DCUR
IC737	6-703-848-01 s	IC SN74CB3T3306DCUR
IC738	6-703-848-01 s	IC SN74CB3T3306DCUR
IC739	6-715-039-01 s	IC TC7SZ08FU, RSONYJ
L101	1-457-372-21 s	COIL, CHOKE 1UH
L102	1-457-372-21 s	COIL, CHOKE 1UH
L103	1-457-372-21 s	COIL, CHOKE 1UH
L105	1-400-675-21 s	INDUCTOR 10UH (2012)
L106	1-457-372-21 s	COIL, CHOKE 1UH
L107	1-457-372-21 s	COIL, CHOKE 1UH
L108	1-457-372-21 s	COIL, CHOKE 1UH
L109	1-400-135-21 s	INDUCTOR 1UH (2012)
L110	1-400-135-21 s	INDUCTOR 1UH (2012)
L111	1-400-135-21 s	INDUCTOR 1UH (2012)
L112	1-481-925-11 s	COIL, CHOKE 0.47UH
L201	1-414-836-21 s	INDUCTOR, CHIP 4.7NH (1005)
L601	1-400-675-21 s	INDUCTOR 10UH (2012)
L602	1-400-675-21 s	INDUCTOR 10UH (2012)
L603	1-400-675-21 s	INDUCTOR 10UH (2012)
L604	1-481-589-21 s	INDUCTOR, CHIP 10UH
L605	1-481-577-21 s	INDUCTOR, CHIP 1.0UH
L606	1-481-577-21 s	INDUCTOR, CHIP 1.0UH
L607	1-481-577-21 s	INDUCTOR, CHIP 1.0UH
L616	1-400-675-21 s	INDUCTOR 10UH (2012)
L617	1-400-675-21 s	INDUCTOR 10UH (2012)
L620	1-400-675-21 s	INDUCTOR 10UH (2012)
L621	1-400-675-21 s	INDUCTOR 10UH (2012)
L624	1-400-675-21 s	INDUCTOR 10UH (2012)
L625	1-412-987-41 s	INDUCTOR, SMALL TYPE 4.7UH
L626	1-400-675-21 s	INDUCTOR 10UH (2012)
L627	1-412-987-41 s	INDUCTOR, SMALL TYPE 4.7UH
L628	1-400-675-21 s	INDUCTOR 10UH (2012)
L629	1-412-987-41 s	INDUCTOR, SMALL TYPE 4.7UH
L701	1-400-675-21 s	INDUCTOR 10UH (2012)
L702	1-400-675-21 s	INDUCTOR 10UH (2012)
L703	1-400-675-21 s	INDUCTOR 10UH (2012)
L704	1-400-675-21 s	INDUCTOR 10UH (2012)
L705	1-400-675-21 s	INDUCTOR 10UH (2012)

DPR-351 BOARD

Ref. No. or Q'ty	Part No.	SP Description
L706	1-400-675-21 s	INDUCTOR 10UH (2012)
L707	1-400-675-21 s	INDUCTOR 10UH (2012)
L708	1-400-675-21 s	INDUCTOR 10UH (2012)
Q101	6-550-631-01 s	TRANSISTOR 2SA1797-T100-Q
Q102	6-550-631-01 s	TRANSISTOR 2SA1797-T100-Q
Q103	8-729-928-05 s	TRANSISTOR 2SC4617TL-QR
Q104	8-729-928-05 s	TRANSISTOR 2SC4617TL-QR
Q105	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q106	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q107	6-550-631-01 s	TRANSISTOR 2SA1797-T100-Q
Q108	6-550-632-01 s	TRANSISTOR 2SC4672-T100-Q
Q109	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q110	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q111	8-729-928-25 s	TRANSISTOR 2SA1774TL-QR
Q112	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q113	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q401	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q402	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q601	8-729-928-05 s	TRANSISTOR 2SC4617TL-QR
Q602	8-729-928-05 s	TRANSISTOR 2SC4617TL-QR
Q603	8-729-928-37 s	TRANSISTOR DTA114EE-TL
Q604	8-729-928-25 s	TRANSISTOR 2SA1774TL-QR
Q605	8-729-928-05 s	TRANSISTOR 2SC4617TL-QR
Q606	8-729-928-05 s	TRANSISTOR 2SC4617TL-QR
Q607	8-729-928-37 s	TRANSISTOR DTA114EE-TL
Q608	8-729-928-25 s	TRANSISTOR 2SA1774TL-QR
Q609	8-729-928-05 s	TRANSISTOR 2SC4617TL-QR
Q610	8-729-928-05 s	TRANSISTOR 2SC4617TL-QR
Q611	8-729-928-37 s	TRANSISTOR DTA114EE-TL
Q612	8-729-928-25 s	TRANSISTOR 2SA1774TL-QR
Q613	8-729-928-25 s	TRANSISTOR 2SA1774TL-QR
Q614	8-729-928-25 s	TRANSISTOR 2SA1774TL-QR
Q701	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q702	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q703	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q704	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q705	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q707	8-729-928-25 s	TRANSISTOR 2SA1774TL-QR
Q708	8-729-928-25 s	TRANSISTOR 2SA1774TL-QR
Q709	8-729-928-25 s	TRANSISTOR 2SA1774TL-QR
Q710	8-729-928-25 s	TRANSISTOR 2SA1774TL-QR
Q711	8-729-928-05 s	TRANSISTOR 2SC4617TL-QR
R002	1-208-911-81 s	RES, CHIP 10K (1005)
R004	1-208-911-81 s	RES, CHIP 10K (1005)
R006	1-208-903-81 s	RES, CHIP 4.7K (1005)
R007	1-208-883-81 s	RES, CHIP 680 (1005)
R008	1-208-883-81 s	RES, CHIP 680 (1005)
R009	1-218-937-81 s	RES, CHIP 47 (1005)
R010	1-218-977-81 s	RES, CHIP 100K (1005)
R011	1-218-977-81 s	RES, CHIP 100K (1005)
R012	1-218-977-81 s	RES, CHIP 100K (1005)
R013	1-208-915-81 s	RES, CHIP 15K (1005)
R014	1-208-915-81 s	RES, CHIP 15K (1005)
R015	1-208-915-81 s	RES, CHIP 15K (1005)
R016	1-218-981-81 s	RES, CHIP 220K (1005)
R017	1-218-981-81 s	RES, CHIP 220K (1005)
R018	1-218-981-81 s	RES, CHIP 220K (1005)
R019	1-218-977-81 s	RES, CHIP 100K (1005)
R022	1-218-977-81 s	RES, CHIP 100K (1005)
R023	1-218-977-81 s	RES, CHIP 100K (1005)
R024	1-218-977-81 s	RES, CHIP 100K (1005)
R025	1-208-887-81 s	RES, CHIP 1.0K (1005)
R026	1-208-887-81 s	RES, CHIP 1.0K (1005)
R027	1-208-915-81 s	RES, CHIP 15K (1005)

DPR-351 BOARD

Ref. No. or Q'ty	Part No.	SP Description
R028	1-242-967-81 s	RES, CHIP 1.0 (1005)
R030	1-242-967-81 s	RES, CHIP 1.0 (1005)
R032	1-208-923-81 s	RES, CHIP 33K (1005)
R033	1-208-923-81 s	RES, CHIP 33K (1005)
R034	1-208-903-81 s	RES, CHIP 4.7K (1005)
R035	1-211-737-91 s	RES,SQUARE TYPE CHIP 0.47 3225
R036	1-211-737-91 s	RES,SQUARE TYPE CHIP 0.47 3225
R037	1-216-809-91 s	RES, CHIP 100 (1608)
R038	1-216-809-91 s	RES, CHIP 100 (1608)
R039	1-216-809-91 s	RES, CHIP 100 (1608)
R040	1-216-809-91 s	RES, CHIP 100 (1608)
R041	1-218-945-81 s	RES, CHIP 220 (1005)
R042	1-218-945-81 s	RES, CHIP 220 (1005)
R043	1-220-230-91 s	RES,SQUARE TYPE CHIP 2.2(3225)
R044	1-220-230-91 s	RES,SQUARE TYPE CHIP 2.2(3225)
R045	1-220-230-91 s	RES,SQUARE TYPE CHIP 2.2(3225)
R046	1-208-919-81 s	RES, CHIP 22K (1005)
R047	1-208-919-81 s	RES, CHIP 22K (1005)
R048	1-208-919-81 s	RES, CHIP 22K (1005)
R049	1-208-919-81 s	RES, CHIP 22K (1005)
R050	1-208-887-81 s	RES, CHIP 1.0K (1005)
R051	1-208-915-81 s	RES, CHIP 15K (1005)
R052	1-208-907-81 s	RES, CHIP 6.8K (1005)
R053	1-208-919-81 s	RES, CHIP 22K (1005)
R054	1-208-919-81 s	RES, CHIP 22K (1005)
R055	1-208-919-81 s	RES, CHIP 22K (1005)
R057	1-208-903-81 s	RES, CHIP 4.7K (1005)
R058	1-218-977-81 s	RES, CHIP 100K (1005)
R059	1-208-911-81 s	RES, CHIP 10K (1005)
R060	1-208-919-81 s	RES, CHIP 22K (1005)
R061	1-218-975-81 s	RES, CHIP 68K (1005)
R062	1-218-945-81 s	RES, CHIP 220 (1005)
R063	1-218-945-81 s	RES, CHIP 220 (1005)
R064	1-218-977-81 s	RES, CHIP 100K (1005)
R065	1-218-973-81 s	RES, CHIP 47K (1005)
R066	1-208-911-81 s	RES, CHIP 10K (1005)
R067	1-218-981-81 s	RES, CHIP 220K (1005)
R068	1-218-981-81 s	RES, CHIP 220K (1005)
R069	1-208-919-81 s	RES, CHIP 22K (1005)
R070	1-218-977-81 s	RES, CHIP 100K (1005)
R071	1-208-919-81 s	RES, CHIP 22K (1005)
R072	1-218-975-81 s	RES, CHIP 68K (1005)
R073	1-208-907-81 s	RES, CHIP 6.8K (1005)
R074	1-208-923-81 s	RES, CHIP 33K (1005)
R075	1-208-923-81 s	RES, CHIP 33K (1005)
R076	1-218-975-81 s	RES, CHIP 68K (1005)
R077	1-218-975-81 s	RES, CHIP 68K (1005)
R078	1-208-895-81 s	RES, CHIP 2.2K (1005)
R079	1-218-973-81 s	RES, CHIP 47K (1005)
R080	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R081	1-220-870-81 s	RES, CHIP 10 (1005)
R082	1-218-941-81 s	RES, CHIP 100 (1005)
R083	1-220-230-91 s	RES,SQUARE TYPE CHIP 2.2(3225)
R084	1-220-230-91 s	RES,SQUARE TYPE CHIP 2.2(3225)
R085	1-208-911-81 s	RES, CHIP 10K (1005)
R086	1-208-911-81 s	RES, CHIP 10K (1005)
R087	1-218-977-81 s	RES, CHIP 100K (1005)
R089	1-208-919-81 s	RES, CHIP 22K (1005)
R090	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R091	1-208-923-81 s	RES, CHIP 33K (1005)
R093	1-208-932-81 s	RES, CHIP 75K (1005)
R094	1-218-941-81 s	RES, CHIP 100 (1005)
R095	1-218-981-81 s	RES, CHIP 220K (1005)
R096	1-218-973-81 s	RES, CHIP 47K (1005)
R097	1-218-975-81 s	RES, CHIP 68K (1005)

DPR-351 BOARD

Ref. No. or Q'ty	Part No.	SP Description
R098	1-208-903-81 s	RES, CHIP 4.7K (1005)
R100	1-208-911-81 s	RES, CHIP 10K (1005)
R101	1-208-879-81 s	RES, CHIP 470 (1005)
R102	1-208-911-81 s	RES, CHIP 10K (1005)
R103	1-208-919-81 s	RES, CHIP 22K (1005)
R105	1-220-230-91 s	RES,SQUARE TYPE CHIP 2.2 (3225)
R106	1-208-895-81 s	RES, CHIP 2.2K (1005)
R107	1-208-903-81 s	RES, CHIP 4.7K (1005)
R108	1-208-911-81 s	RES, CHIP 10K (1005)
R113	1-208-895-81 s	RES, CHIP 2.2K (1005)
R114	1-208-887-81 s	RES, CHIP 1.0K (1005)
R115	1-208-903-81 s	RES, CHIP 4.7K (1005)
R116	1-208-899-81 s	RES, CHIP 3.3K (1005)
R119	1-218-933-81 s	RES, CHIP 22 (1005)
R120	1-218-973-81 s	RES, CHIP 47K (1005)
R121	1-218-973-81 s	RES, CHIP 47K (1005)
R122	1-218-937-81 s	RES, CHIP 47 (1005)
R123	1-218-937-81 s	RES, CHIP 47 (1005)
R124	1-218-933-81 s	RES, CHIP 22 (1005)
R125	1-218-933-81 s	RES, CHIP 22 (1005)
R128	1-208-903-81 s	RES, CHIP 4.7K (1005)
R129	1-208-903-81 s	RES, CHIP 4.7K (1005)
R130	1-208-879-81 s	RES, CHIP 470 (1005)
R132	1-218-961-81 s	RES, CHIP 4.7K (1005)
R201	1-218-933-81 s	RES, CHIP 22 (1005)
R202	1-218-933-81 s	RES, CHIP 22 (1005)
R203	1-218-973-81 s	RES, CHIP 47K (1005)
R204	1-208-903-81 s	RES, CHIP 4.7K (1005)
R205	1-218-933-81 s	RES, CHIP 22 (1005)
R206	1-208-856-81 s	RES, CHIP 51 (1005)
R207	1-208-856-81 s	RES, CHIP 51 (1005)
R208	1-218-937-81 s	RES, CHIP 47 (1005)
R209	1-208-883-81 s	RES, CHIP 680 (1005)
R210	1-218-965-81 s	RES, CHIP 10K (1005)
R211	1-218-933-81 s	RES, CHIP 22 (1005)
R212	1-218-977-81 s	RES, CHIP 100K (1005)
R213	1-218-965-81 s	RES, CHIP 10K (1005)
R214	1-218-965-81 s	RES, CHIP 10K (1005)
R215	1-208-860-81 s	RES, CHIP 75 (1005)
R216	1-208-860-81 s	RES, CHIP 75 (1005)
R217	1-208-860-81 s	RES, CHIP 75 (1005)
R218	1-208-887-81 s	RES, CHIP 1.0K (1005)
R219	1-208-887-81 s	RES, CHIP 1.0K (1005)
R220	1-218-933-81 s	RES, CHIP 22 (1005)
R221	1-218-933-81 s	RES, CHIP 22 (1005)
R222	1-218-933-81 s	RES, CHIP 22 (1005)
R223	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R224	1-208-887-81 s	RES, CHIP 1.0K (1005)
R225	1-218-933-81 s	RES, CHIP 22 (1005)
R226	1-208-887-81 s	RES, CHIP 1.0K (1005)
R227	1-208-887-81 s	RES, CHIP 1.0K (1005)
R232	1-218-933-81 s	RES, CHIP 22 (1005)
R233	1-218-933-81 s	RES, CHIP 22 (1005)
R234	1-218-933-81 s	RES, CHIP 22 (1005)
R235	1-218-933-81 s	RES, CHIP 22 (1005)
R236	1-218-933-81 s	RES, CHIP 22 (1005)
R237	1-218-973-81 s	RES, CHIP 47K (1005)
R238	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R239	1-218-941-81 s	RES, CHIP 100 (1005)
R240	1-208-903-81 s	RES, CHIP 4.7K (1005)
R301	1-208-887-81 s	RES, CHIP 1.0K (1005)
R302	1-208-887-81 s	RES, CHIP 1.0K (1005)
R303	1-208-911-81 s	RES, CHIP 10K (1005)
R304	1-208-895-81 s	RES, CHIP 2.2K (1005)
R305	1-208-895-81 s	RES, CHIP 2.2K (1005)

DPR-351 BOARD

Ref. No. or Q'ty	Part No.	SP Description
R306	1-208-887-81 s	RES, CHIP 1.0K (1005)
R307	1-208-887-81 s	RES, CHIP 1.0K (1005)
R308	1-208-895-81 s	RES, CHIP 2.2K (1005)
R310	1-208-887-81 s	RES, CHIP 1.0K (1005)
R311	1-218-945-81 s	RES, CHIP 220 (1005)
R312	1-218-945-81 s	RES, CHIP 220 (1005)
R313	1-220-878-81 s	RES, CHIP 22 (1005)
R314	1-208-911-81 s	RES, CHIP 10K (1005)
R315	1-208-887-81 s	RES, CHIP 1.0K (1005)
R401	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R402	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R403	1-218-933-81 s	RES, CHIP 22 (1005)
R404	1-218-933-81 s	RES, CHIP 22 (1005)
R405	1-218-965-81 s	RES, CHIP 10K (1005)
R406	1-218-965-81 s	RES, CHIP 10K (1005)
R408	1-218-937-81 s	RES, CHIP 47 (1005)
R412	1-218-941-81 s	RES, CHIP 100 (1005)
R413	1-218-937-81 s	RES, CHIP 47 (1005)
R414	1-218-965-81 s	RES, CHIP 10K (1005)
R416	1-218-929-81 s	RES, CHIP 10 (1005)
R417	1-218-933-81 s	RES, CHIP 22 (1005)
R418	1-218-933-81 s	RES, CHIP 22 (1005)
R419	1-208-913-81 s	RES, CHIP 12K (1005)
R420	1-208-903-81 s	RES, CHIP 4.7K (1005)
R422	1-218-977-81 s	RES, CHIP 100K (1005)
R423	1-218-977-81 s	RES, CHIP 100K (1005)
R424	1-218-965-81 s	RES, CHIP 10K (1005)
R425	1-218-965-81 s	RES, CHIP 10K (1005)
R426	1-218-937-81 s	RES, CHIP 47 (1005)
R427	1-218-937-81 s	RES, CHIP 47 (1005)
R428	1-218-933-81 s	RES, CHIP 22 (1005)
R501	1-208-911-81 s	RES, CHIP 10K (1005)
R502	1-208-895-81 s	RES, CHIP 2.2K (1005)
R503	1-208-895-81 s	RES, CHIP 2.2K (1005)
R504	1-208-895-81 s	RES, CHIP 2.2K (1005)
R506	1-218-933-81 s	RES, CHIP 22 (1005)
R507	1-218-933-81 s	RES, CHIP 22 (1005)
R508	1-211-899-91 s	RES,SQUARE TYPE CHIP 0.22 3225
R509	1-211-899-91 s	RES,SQUARE TYPE CHIP 0.22 3225
R601	1-218-937-81 s	RES, CHIP 47 (1005)
R602	1-218-977-81 s	RES, CHIP 100K (1005)
R603	1-218-937-81 s	RES, CHIP 47 (1005)
R604	1-218-937-81 s	RES, CHIP 47 (1005)
R605	1-208-895-81 s	RES, CHIP 2.2K (1005)
R606	1-208-895-81 s	RES, CHIP 2.2K (1005)
R607	1-208-903-81 s	RES, CHIP 4.7K (1005)
R608	1-208-887-81 s	RES, CHIP 1.0K (1005)
R609	1-208-887-81 s	RES, CHIP 1.0K (1005)
R610	1-208-903-81 s	RES, CHIP 4.7K (1005)
R611	1-208-883-81 s	RES, CHIP 680 (1005)
R612	1-208-883-81 s	RES, CHIP 680 (1005)
R613	1-208-879-81 s	RES, CHIP 470 (1005)
R614	1-208-879-81 s	RES, CHIP 470 (1005)
R615	1-208-879-81 s	RES, CHIP 470 (1005)
R616	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R617	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R618	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R619	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R620	1-208-859-81 s	RES, CHIP 68 (1005)
R621	1-218-941-81 s	RES, CHIP 100 (1005)
R622	1-218-937-81 s	RES, CHIP 47 (1005)
R623	1-218-937-81 s	RES, CHIP 47 (1005)
R624	1-208-879-81 s	RES, CHIP 470 (1005)
R625	1-218-929-81 s	RES, CHIP 10 (1005)
R626	1-208-883-81 s	RES, CHIP 680 (1005)

DPR-351 BOARD

Ref. No. or Q'ty	Part No.	SP Description
R627	1-218-937-81 s	RES, CHIP 47 (1005)
R628	1-208-883-81 s	RES, CHIP 680 (1005)
R629	1-218-941-81 s	RES, CHIP 100 (1005)
R630	1-208-883-81 s	RES, CHIP 680 (1005)
R631	1-218-941-81 s	RES, CHIP 100 (1005)
R632	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R633	1-208-911-81 s	RES, CHIP 10K (1005)
R634	1-208-887-81 s	RES, CHIP 1.0K (1005)
R635	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R636	1-208-911-81 s	RES, CHIP 10K (1005)
R637	1-208-887-81 s	RES, CHIP 1.0K (1005)
R638	1-218-945-81 s	RES, CHIP 220 (1005)
R639	1-208-879-81 s	RES, CHIP 470 (1005)
R640	1-208-903-81 s	RES, CHIP 4.7K (1005)
R641	1-208-891-81 s	RES, CHIP 1.5K (1005)
R642	1-208-879-81 s	RES, CHIP 470 (1005)
R643	1-208-903-81 s	RES, CHIP 4.7K (1005)
R644	1-208-891-81 s	RES, CHIP 1.5K (1005)
R645	1-208-883-81 s	RES, CHIP 680 (1005)
R646	1-208-883-81 s	RES, CHIP 680 (1005)
R647	1-208-883-81 s	RES, CHIP 680 (1005)
R648	1-208-883-81 s	RES, CHIP 680 (1005)
R649	1-208-883-81 s	RES, CHIP 680 (1005)
R650	1-208-883-81 s	RES, CHIP 680 (1005)
R651	1-208-883-81 s	RES, CHIP 680 (1005)
R652	1-208-883-81 s	RES, CHIP 680 (1005)
R653	1-208-883-81 s	RES, CHIP 680 (1005)
R654	1-208-883-81 s	RES, CHIP 680 (1005)
R655	1-208-883-81 s	RES, CHIP 680 (1005)
R656	1-218-945-81 s	RES, CHIP 220 (1005)
R657	1-218-945-81 s	RES, CHIP 220 (1005)
R658	1-218-945-81 s	RES, CHIP 220 (1005)
R659	1-218-945-81 s	RES, CHIP 220 (1005)
R660	1-218-945-81 s	RES, CHIP 220 (1005)
R661	1-218-945-81 s	RES, CHIP 220 (1005)
R662	1-218-945-81 s	RES, CHIP 220 (1005)
R663	1-218-945-81 s	RES, CHIP 220 (1005)
R664	1-218-945-81 s	RES, CHIP 220 (1005)
R665	1-218-945-81 s	RES, CHIP 220 (1005)
R666	1-218-945-81 s	RES, CHIP 220 (1005)
R667	1-218-941-81 s	RES, CHIP 100 (1005)
R669	1-208-903-81 s	RES, CHIP 4.7K (1005)
R670	1-218-941-81 s	RES, CHIP 100 (1005)
R671	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R672	1-218-945-81 s	RES, CHIP 220 (1005)
R673	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R674	1-208-915-81 s	RES, CHIP 15K (1005)
R675	1-208-899-81 s	RES, CHIP 3.3K (1005)
R676	1-208-903-81 s	RES, CHIP 4.7K (1005)
R677	1-208-875-81 s	RES, CHIP 330 (1005)
R678	1-208-887-81 s	RES, CHIP 1.0K (1005)
R680	1-208-887-81 s	RES, CHIP 1.0K (1005)
R681	1-208-895-81 s	RES, CHIP 2.2K (1005)
R682	1-208-895-81 s	RES, CHIP 2.2K (1005)
R683	1-208-903-81 s	RES, CHIP 4.7K (1005)
R684	1-218-941-81 s	RES, CHIP 100 (1005)
R685	1-218-945-81 s	RES, CHIP 220 (1005)
R686	1-208-875-81 s	RES, CHIP 330 (1005)
R687	1-220-870-81 s	RES, CHIP 10 (1005)
R688	1-218-941-81 s	RES, CHIP 100 (1005)
R689	1-218-941-81 s	RES, CHIP 100 (1005)
R690	1-220-870-81 s	RES, CHIP 10 (1005)
R692	1-218-941-81 s	RES, CHIP 100 (1005)
R693	1-208-887-81 s	RES, CHIP 1.0K (1005)
R694	1-208-887-81 s	RES, CHIP 1.0K (1005)

DPR-351 BOARD

Ref. No. or Q'ty	Part No.	SP Description
R695	1-208-903-81 s	RES, CHIP 4.7K (1005)
R696	1-218-941-81 s	RES, CHIP 100 (1005)
R697	1-208-899-81 s	RES, CHIP 3.3K (1005)
R698	1-208-883-81 s	RES, CHIP 680 (1005)
R699	1-208-899-81 s	RES, CHIP 3.3K (1005)
R700	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R701	1-218-945-81 s	RES, CHIP 220 (1005)
R702	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R703	1-208-915-81 s	RES, CHIP 15K (1005)
R704	1-208-899-81 s	RES, CHIP 3.3K (1005)
R705	1-208-903-81 s	RES, CHIP 4.7K (1005)
R706	1-208-899-81 s	RES, CHIP 3.3K (1005)
R707	1-218-941-81 s	RES, CHIP 100 (1005)
R708	1-208-911-81 s	RES, CHIP 10K (1005)
R709	1-208-875-81 s	RES, CHIP 330 (1005)
R710	1-208-887-81 s	RES, CHIP 1.0K (1005)
R711	1-218-941-81 s	RES, CHIP 100 (1005)
R712	1-208-887-81 s	RES, CHIP 1.0K (1005)
R713	1-218-937-81 s	RES, CHIP 47 (1005)
R714	1-208-899-81 s	RES, CHIP 3.3K (1005)
R715	1-208-903-81 s	RES, CHIP 4.7K (1005)
R717	1-208-899-81 s	RES, CHIP 3.3K (1005)
R718	1-218-941-81 s	RES, CHIP 100 (1005)
R719	1-208-887-81 s	RES, CHIP 1.0K (1005)
R720	1-208-911-81 s	RES, CHIP 10K (1005)
R721	1-208-875-81 s	RES, CHIP 330 (1005)
R722	1-208-895-81 s	RES, CHIP 2.2K (1005)
R723	1-208-895-81 s	RES, CHIP 2.2K (1005)
R724	1-208-903-81 s	RES, CHIP 4.7K (1005)
R725	1-218-941-81 s	RES, CHIP 100 (1005)
R726	1-218-945-81 s	RES, CHIP 220 (1005)
R727	1-218-937-81 s	RES, CHIP 47 (1005)
R728	1-208-875-81 s	RES, CHIP 330 (1005)
R729	1-208-899-81 s	RES, CHIP 3.3K (1005)
R730	1-220-870-81 s	RES, CHIP 10 (1005)
R731	1-208-899-81 s	RES, CHIP 3.3K (1005)
R732	1-218-941-81 s	RES, CHIP 100 (1005)
R733	1-208-911-81 s	RES, CHIP 10K (1005)
R734	1-208-895-81 s	RES, CHIP 2.2K (1005)
R735	1-208-867-81 s	RES, CHIP 150 (1005)
R736	1-208-867-81 s	RES, CHIP 150 (1005)
R737	1-218-941-81 s	RES, CHIP 100 (1005)
R739	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R740	1-208-887-81 s	RES, CHIP 1.0K (1005)
R741	1-218-945-81 s	RES, CHIP 220 (1005)
R742	1-218-941-81 s	RES, CHIP 100 (1005)
R743	1-208-911-81 s	RES, CHIP 10K (1005)
R744	1-208-887-81 s	RES, CHIP 1.0K (1005)
R746	1-208-887-81 s	RES, CHIP 1.0K (1005)
R747	1-208-887-81 s	RES, CHIP 1.0K (1005)
R748	1-208-883-81 s	RES, CHIP 680 (1005)
R749	1-208-867-81 s	RES, CHIP 150 (1005)
R750	1-208-867-81 s	RES, CHIP 150 (1005)
R751	1-218-941-81 s	RES, CHIP 100 (1005)
R752	1-208-887-81 s	RES, CHIP 1.0K (1005)
R753	1-218-941-81 s	RES, CHIP 100 (1005)
R754	1-218-933-81 s	RES, CHIP 22 (1005)
R755	1-208-875-81 s	RES, CHIP 330 (1005)
R759	1-218-941-81 s	RES, CHIP 100 (1005)
R760	1-218-933-81 s	RES, CHIP 22 (1005)
R761	1-208-875-81 s	RES, CHIP 330 (1005)
R762	1-208-895-81 s	RES, CHIP 2.2K (1005)
R763	1-208-891-81 s	RES, CHIP 1.5K (1005)
R764	1-208-875-81 s	RES, CHIP 330 (1005)
R765	1-208-887-81 s	RES, CHIP 1.0K (1005)

DPR-351 BOARD

Ref. No. or Q'ty	Part No.	SP Description
R768	1-208-895-81 s	RES, CHIP 2.2K (1005)
R769	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R770	1-218-941-81 s	RES, CHIP 100 (1005)
R771	1-218-941-81 s	RES, CHIP 100 (1005)
R773	1-218-933-81 s	RES, CHIP 22 (1005)
R774	1-208-911-81 s	RES, CHIP 10K (1005)
R775	1-208-911-81 s	RES, CHIP 10K (1005)
R777	1-208-955-81 s	RES, CHIP 680K (1005)
R778	1-208-951-81 s	RES, CHIP 470K (1005)
R779	1-218-937-81 s	RES, CHIP 47 (1005)
R780	1-218-979-81 s	RES, CHIP 150K (1005)
R781	1-218-977-81 s	RES, CHIP 100K (1005)
R782	1-208-875-81 s	RES, CHIP 330 (1005)
R783	1-218-937-81 s	RES, CHIP 47 (1005)
R784	1-218-945-81 s	RES, CHIP 220 (1005)
R785	1-208-955-81 s	RES, CHIP 680K (1005)
R786	1-218-941-81 s	RES, CHIP 100 (1005)
R787	1-208-895-81 s	RES, CHIP 2.2K (1005)
R789	1-218-941-81 s	RES, CHIP 100 (1005)
R790	1-218-941-81 s	RES, CHIP 100 (1005)
R791	1-208-911-81 s	RES, CHIP 10K (1005)
R792	1-208-911-81 s	RES, CHIP 10K (1005)
R793	1-218-933-81 s	RES, CHIP 22 (1005)
R801	1-218-965-81 s	RES, CHIP 10K (1005)
R802	1-218-957-81 s	RES, CHIP 2.2K (1005)
R803	1-218-957-81 s	RES, CHIP 2.2K (1005)
R804	1-208-911-81 s	RES, CHIP 10K (1005)
R805	1-218-957-81 s	RES, CHIP 2.2K (1005)
R807	1-218-973-81 s	RES, CHIP 47K (1005)
R808	1-218-973-81 s	RES, CHIP 47K (1005)
R809	1-218-957-81 s	RES, CHIP 2.2K (1005)
R810	1-218-957-81 s	RES, CHIP 2.2K (1005)
R811	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R812	1-218-973-81 s	RES, CHIP 47K (1005)
R813	1-218-973-81 s	RES, CHIP 47K (1005)
R814	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R815	1-208-879-81 s	RES, CHIP 470 (1005)
R816	1-218-973-81 s	RES, CHIP 47K (1005)
R817	1-218-973-81 s	RES, CHIP 47K (1005)
R818	1-218-941-81 s	RES, CHIP 100 (1005)
R819	1-208-887-81 s	RES, CHIP 1.0K (1005)
R820	1-208-919-81 s	RES, CHIP 22K (1005)
R821	1-218-957-81 s	RES, CHIP 2.2K (1005)
R824	1-218-973-81 s	RES, CHIP 47K (1005)
R825	1-208-887-81 s	RES, CHIP 1.0K (1005)
R826	1-218-973-81 s	RES, CHIP 47K (1005)
R827	1-218-965-81 s	RES, CHIP 10K (1005)
R828	1-218-965-81 s	RES, CHIP 10K (1005)
R831	1-218-965-81 s	RES, CHIP 10K (1005)
R832	1-218-965-81 s	RES, CHIP 10K (1005)
R833	1-218-957-81 s	RES, CHIP 2.2K (1005)
R834	1-218-965-81 s	RES, CHIP 10K (1005)
R835	1-218-965-81 s	RES, CHIP 10K (1005)
R837	1-218-965-81 s	RES, CHIP 10K (1005)
R839	1-218-965-81 s	RES, CHIP 10K (1005)
R840	1-218-965-81 s	RES, CHIP 10K (1005)
R841	1-208-911-81 s	RES, CHIP 10K (1005)
R842	1-218-985-81 s	RES, CHIP 470K (1005)
R843	1-208-903-81 s	RES, CHIP 4.7K (1005)
R844	1-220-878-81 s	RES, CHIP 22 (1005)
R845	1-208-871-81 s	RES, CHIP 220 (1005)
R846	1-220-878-81 s	RES, CHIP 22 (1005)
R847	1-208-879-81 s	RES, CHIP 470 (1005)
R848	1-218-965-81 s	RES, CHIP 10K (1005)
R849	1-218-945-81 s	RES, CHIP 220 (1005)

DPR-351 BOARD

Ref. No. or Q'ty	Part No.	SP Description
R850	1-218-965-81 s	RES, CHIP 10K (1005)
R851	1-218-941-81 s	RES, CHIP 100 (1005)
R852	1-218-965-81 s	RES, CHIP 10K (1005)
R853	1-218-937-81 s	RES, CHIP 47 (1005)
R854	1-218-937-81 s	RES, CHIP 47 (1005)
R855	1-218-929-81 s	RES, CHIP 10 (1005)
R856	1-218-929-81 s	RES, CHIP 10 (1005)
R857	1-218-929-81 s	RES, CHIP 10 (1005)
R858	1-218-965-81 s	RES, CHIP 10K (1005)
R859	1-218-941-81 s	RES, CHIP 100 (1005)
R860	1-208-887-81 s	RES, CHIP 1.0K (1005)
R861	1-208-887-81 s	RES, CHIP 1.0K (1005)
R862	1-208-887-81 s	RES, CHIP 1.0K (1005)
R863	1-208-887-81 s	RES, CHIP 1.0K (1005)
R864	1-218-941-81 s	RES, CHIP 100 (1005)
R865	1-220-878-81 s	RES, CHIP 22 (1005)
R866	1-220-878-81 s	RES, CHIP 22 (1005)
R867	1-208-887-81 s	RES, CHIP 1.0K (1005)
R868	1-208-887-81 s	RES, CHIP 1.0K (1005)
R869	1-208-887-81 s	RES, CHIP 1.0K (1005)
R870	1-208-887-81 s	RES, CHIP 1.0K (1005)
R871	1-220-878-81 s	RES, CHIP 22 (1005)
R872	1-220-878-81 s	RES, CHIP 22 (1005)
R873	1-220-878-81 s	RES, CHIP 22 (1005)
R874	1-220-878-81 s	RES, CHIP 22 (1005)
R875	1-220-878-81 s	RES, CHIP 22 (1005)
R876	1-220-878-81 s	RES, CHIP 22 (1005)
R877	1-220-878-81 s	RES, CHIP 22 (1005)
R879	1-208-903-81 s	RES, CHIP 4.7K (1005)
R880	1-208-903-81 s	RES, CHIP 4.7K (1005)
R881	1-220-878-81 s	RES, CHIP 22 (1005)
R883	1-208-903-81 s	RES, CHIP 4.7K (1005)
R885	1-220-878-81 s	RES, CHIP 22 (1005)
R886	1-208-887-81 s	RES, CHIP 1.0K (1005)
R887	1-208-903-81 s	RES, CHIP 4.7K (1005)
R888	1-208-887-81 s	RES, CHIP 1.0K (1005)
R891	1-208-887-81 s	RES, CHIP 1.0K (1005)
R893	1-208-887-81 s	RES, CHIP 1.0K (1005)
R894	1-208-887-81 s	RES, CHIP 1.0K (1005)
R897	1-208-887-81 s	RES, CHIP 1.0K (1005)
R898	1-220-878-81 s	RES, CHIP 22 (1005)
R899	1-208-903-81 s	RES, CHIP 4.7K (1005)
R900	1-220-878-81 s	RES, CHIP 22 (1005)
R901	1-208-887-81 s	RES, CHIP 1.0K (1005)
R902	1-208-903-81 s	RES, CHIP 4.7K (1005)
R904	1-208-887-81 s	RES, CHIP 1.0K (1005)
R907	1-208-887-81 s	RES, CHIP 1.0K (1005)
R909	1-208-887-81 s	RES, CHIP 1.0K (1005)
R910	1-208-887-81 s	RES, CHIP 1.0K (1005)
R913	1-208-887-81 s	RES, CHIP 1.0K (1005)
R914	1-208-903-81 s	RES, CHIP 4.7K (1005)
R915	1-220-878-81 s	RES, CHIP 22 (1005)
R916	1-208-911-81 s	RES, CHIP 10K (1005)
R917	1-208-903-81 s	RES, CHIP 4.7K (1005)
R918	1-220-870-81 s	RES, CHIP 10 (1005)
R919	1-220-870-81 s	RES, CHIP 10 (1005)
R920	1-220-870-81 s	RES, CHIP 10 (1005)
RB101	1-234-373-21 s	RES, NETWORK 220 (1005X4)
RB102	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB103	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB104	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB105	1-234-380-21 s	RES, NETWORK 47K (1005X4)
RB106	1-234-380-21 s	RES, NETWORK 47K (1005X4)
RB107	1-234-380-21 s	RES, NETWORK 47K (1005X4)
RB108	1-234-380-21 s	RES, NETWORK 47K (1005X4)

DPR-351 BOARD

Ref. No. or Q'ty	Part No.	SP Description
RB109	1-234-380-21 s	RES, NETWORK 47K (1005X4)
RB110	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB111	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB112	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB113	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB114	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB119	1-234-378-21 s	RES, NETWORK 10K (1005X4)
RB201	1-234-400-21 s	CONDUCTOR, NETWORK (1005X4)
RB204	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB205	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB206	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB207	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB210	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB211	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB212	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB213	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB221	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB222	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB223	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB224	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB301	1-234-380-21 s	RES, NETWORK 47K (1005X4)
RB302	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB303	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB402	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB412	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB413	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB414	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB420	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB421	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB422	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB424	1-234-373-21 s	RES, NETWORK 220 (1005X4)
RB425	1-234-380-21 s	RES, NETWORK 47K (1005X4)
RB426	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB428	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB429	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB431	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB432	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB433	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB435	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB436	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB437	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB438	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB439	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB440	1-234-369-21 s	RES, NETWORK 10 (1005X4)
RB517	1-234-373-21 s	RES, NETWORK 220 (1005X4)
RB518	1-234-373-21 s	RES, NETWORK 220 (1005X4)
RB519	1-234-373-21 s	RES, NETWORK 220 (1005X4)
RB520	1-234-373-21 s	RES, NETWORK 220 (1005X4)
RB521	1-234-373-21 s	RES, NETWORK 220 (1005X4)
RB522	1-234-373-21 s	RES, NETWORK 220 (1005X4)
RB523	1-234-373-21 s	RES, NETWORK 220 (1005X4)
RB524	1-234-373-21 s	RES, NETWORK 220 (1005X4)
RB525	1-234-373-21 s	RES, NETWORK 220 (1005X4)
RB526	1-234-373-21 s	RES, NETWORK 220 (1005X4)
RB527	1-234-373-21 s	RES, NETWORK 220 (1005X4)
RB528	1-234-373-21 s	RES, NETWORK 220 (1005X4)
RB529	1-234-373-21 s	RES, NETWORK 220 (1005X4)
RB530	1-234-373-21 s	RES, NETWORK 220 (1005X4)
RB531	1-234-373-21 s	RES, NETWORK 220 (1005X4)
RB532	1-234-373-21 s	RES, NETWORK 220 (1005X4)
RB533	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB534	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB535	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB536	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB537	1-234-371-21 s	RES, NETWORK 47 (1005X4)

DPR-351 BOARD

Ref. No. or Q'ty	Part No.	SP Description
RB601	1-234-373-21 s	RES, NETWORK 220 (1005X4)
RB602	1-234-373-21 s	RES, NETWORK 220 (1005X4)
RB603	1-234-373-21 s	RES, NETWORK 220 (1005X4)
RB604	1-234-373-21 s	RES, NETWORK 220 (1005X4)
RB605	1-234-377-21 s	RES, NETWORK 4.7K (1005X4)
RB606	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB607	1-234-373-21 s	RES, NETWORK 220 (1005X4)
RB608	1-234-373-21 s	RES, NETWORK 220 (1005X4)
RB609	1-234-373-21 s	RES, NETWORK 220 (1005X4)
RB610	1-234-373-21 s	RES, NETWORK 220 (1005X4)
RB611	1-234-373-21 s	RES, NETWORK 220 (1005X4)
RB612	1-234-373-21 s	RES, NETWORK 220 (1005X4)
RB613	1-234-373-21 s	RES, NETWORK 220 (1005X4)
RB614	1-234-373-21 s	RES, NETWORK 220 (1005X4)
RB615	1-234-373-21 s	RES, NETWORK 220 (1005X4)
RB616	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB617	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB619	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB623	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB624	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB701	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB702	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB703	1-234-373-21 s	RES, NETWORK 220 (1005X4)
RB704	1-234-373-21 s	RES, NETWORK 220 (1005X4)
RB707	1-234-377-21 s	RES, NETWORK 4.7K (1005X4)
RB708	1-234-377-21 s	RES, NETWORK 4.7K (1005X4)
RB709	1-234-377-21 s	RES, NETWORK 4.7K (1005X4)
RB711	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB712	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB713	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB715	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB717	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB719	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB720	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB721	1-234-378-21 s	RES, NETWORK 10K (1005X4)
RB722	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB723	1-234-378-21 s	RES, NETWORK 10K (1005X4)
S401	1-692-270-41 s	SWITCH, SLIDE
THP101	△ 1-804-616-21 s	THERMISTOR, POSITIVE
THP102	△ 1-804-616-21 s	THERMISTOR, POSITIVE
THP103	△ 1-804-616-21 s	THERMISTOR, POSITIVE
TP301	1-535-877-22 s	CHIP, CHECKER
TP302	1-535-877-22 s	CHIP, CHECKER
TP401	1-535-877-22 s	CHIP, CHECKER
TP402	1-535-877-22 s	CHIP, CHECKER
TP403	1-535-877-22 s	CHIP, CHECKER
TP404	1-535-877-22 s	CHIP, CHECKER
TP601	1-535-877-22 s	CHIP, CHECKER
TP602	1-535-877-22 s	CHIP, CHECKER
TP603	1-535-877-22 s	CHIP, CHECKER
TP604	1-535-877-22 s	CHIP, CHECKER
TP606	1-535-877-22 s	CHIP, CHECKER
TP607	1-535-877-22 s	CHIP, CHECKER
TP608	1-535-877-22 s	CHIP, CHECKER
TP701	1-535-877-22 s	CHIP, CHECKER
TP702	1-535-877-22 s	CHIP, CHECKER
VDR201	1-802-245-11 s	ESD SUPPRESSOR
X701	1-814-512-11 s	OSCILLATOR, CRYSTAL VCXO 148.5
X702	1-795-764-12 s	OSCILLATOR, CRYSTAL (VCXO) 5V
X703	1-814-511-11 s	OSCILLATOR, CRYSTAL VCXO 148.3

IF-1231 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1992-434-A s	MOUNTED CIRCUIT BOARD, IF-1231
C001	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C002	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C003	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C004	1-100-415-91 s	CAP, CHIP CERAMIC 0.47MF (1005)
C005	1-100-415-91 s	CAP, CHIP CERAMIC 0.47MF (1005)
C006	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C007	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C008	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C009	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C010	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C011	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C012	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C013	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C014	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C015	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C016	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C017	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C018	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C019	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C020	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C021	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C022	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C023	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C024	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C025	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C026	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C027	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C028	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C029	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C030	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C031	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C032	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
CN002	1-770-628-21 s	PIN, CONNECTOR 11P
FL001	1-234-939-21 s	FILTER, EMI REMOVAL (SMD)
IC002	6-703-238-01 s	IC TC7WZ34FK
IC003	6-703-238-01 s	IC TC7WZ34FK
Q001	8-729-928-05 s	TRANSISTOR 2SC4617TL-QR
R001	1-218-965-81 s	RES, CHIP 10K (1005)
R002	1-218-961-81 s	RES, CHIP 4.7K (1005)
R003	1-218-961-81 s	RES, CHIP 4.7K (1005)
R004	1-218-965-81 s	RES, CHIP 10K (1005)
R005	1-218-941-81 s	RES, CHIP 100 (1005)
R006	1-218-961-81 s	RES, CHIP 4.7K (1005)
R007	1-218-941-81 s	RES, CHIP 100 (1005)
R008	1-218-941-81 s	RES, CHIP 100 (1005)
R009	1-218-965-81 s	RES, CHIP 10K (1005)
R010	1-218-965-81 s	RES, CHIP 10K (1005)
R011	1-218-965-81 s	RES, CHIP 10K (1005)
R012	1-218-965-81 s	RES, CHIP 10K (1005)
R014	1-218-965-81 s	RES, CHIP 10K (1005)
R016	1-218-941-81 s	RES, CHIP 100 (1005)
R017	1-218-941-81 s	RES, CHIP 100 (1005)
R019	1-218-941-81 s	RES, CHIP 100 (1005)
R020	1-218-941-81 s	RES, CHIP 100 (1005)
R022	1-218-941-81 s	RES, CHIP 100 (1005)
R023	1-218-941-81 s	RES, CHIP 100 (1005)
R024	1-218-941-81 s	RES, CHIP 100 (1005)
R025	1-218-941-81 s	RES, CHIP 100 (1005)
RB002	1-234-370-21 s	RES, NETWORK 22 (1005X4)

IF-1231 BOARD

Ref. No. or Q'ty	Part No.	SP Description
RB003	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB004	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB005	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB006	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB007	1-234-370-21 s	RES, NETWORK 22 (1005X4)

IF-1262 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-2039-276-A s	MOUNTED CIRCUIT BOARD, IF-1262
C001	1-116-709-11 s	CAP, CERAMIC 22MF X5R 3225
C002	1-116-709-11 s	CAP, CERAMIC 22MF X5R 3225
C004	1-116-711-11 s	CAP, CERAMIC 22MF X5R 3216
C005	1-116-711-11 s	CAP, CERAMIC 22MF X5R 3216
C006	1-116-711-11 s	CAP, CERAMIC 22MF X5R 3216
C008	1-116-711-11 s	CAP, CERAMIC 22MF X5R 3216
C009	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C010	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C011	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C012	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C013	1-116-717-11 s	CAP, CERAMIC 10MF X5R 2012
C014	1-116-717-11 s	CAP, CERAMIC 10MF X5R 2012
C015	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C016	1-116-717-11 s	CAP, CERAMIC 10MF X5R 2012
C021	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C022	1-116-717-11 s	CAP, CERAMIC 10MF X5R 2012
C031	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C032	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C033	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C034	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C035	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C041	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C042	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C043	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C044	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C045	1-118-036-11 s	CAP, CERAMIC 0.1MF X5R (1608)
C046	1-118-036-11 s	CAP, CERAMIC 0.1MF X5R (1608)
C047	1-112-800-11 s	CAP, ELECT 100MF
C048	1-118-036-11 s	CAP, CERAMIC 0.1MF X5R (1608)
C050	1-116-709-11 s	CAP, CERAMIC 22MF X5R 3225
C051	1-118-036-11 s	CAP, CERAMIC 0.1MF X5R (1608)
C052	1-118-036-11 s	CAP, CERAMIC 0.1MF X5R (1608)
C058	1-116-711-11 s	CAP, CERAMIC 22MF X5R 3216
C059	1-116-717-11 s	CAP, CERAMIC 10MF X5R 2012
C060	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C062	1-118-036-11 s	CAP, CERAMIC 0.1MF X5R (1608)
CN001	1-750-005-21 o	PIN, CONNECTOR (PC BOARD) 4P
CN003	1-822-507-21 s	CONNECTOR, BOARD TO BOARD 30P
CN004	1-770-625-21 s	PIN, CONNECTOR 8P
CN006	1-580-056-21 s	PIN, CONNECTOR (SMD) 3P
CN007	1-770-160-21 s	PIN, CONNECTOR (PC BOARD) 2P
D001	6-502-729-01 s	DI RSX201L-30USTE25
D002	6-503-573-01 o	DI 1SS400SMGJT2R
D003	6-503-573-01 o	DI 1SS400SMGJT2R
D004	6-500-694-01 s	DI UDZSUSTE-172.4B
D005	8-719-083-83 s	DI UDZSUSTE-1715B
D006	8-719-938-77 s	DIODE SB05-05C-TB-E
D007	8-719-072-43 s	DIODE RB050L-40TE25
D008	6-503-573-01 o	DI 1SS400SMGJT2R
D009	6-502-197-01 s	DI SML-D12M8WT86SM

IF-1262 BOARD

Ref. No. or Q'ty	Part No.	SP Description
E001	1-535-877-22 s	CHIP, CHECKER
E002	1-535-877-22 s	CHIP, CHECKER
E003	1-535-877-22 s	CHIP, CHECKER
FB001	1-400-580-21 s	FERRITE, EMI (SMD)
FB002	1-400-382-21 s	EMI FERRITE (SMD) (1608)
FB003	1-400-382-21 s	EMI FERRITE (SMD) (1608)
FB004	1-400-382-21 s	EMI FERRITE (SMD) (1608)
FB005	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB006	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB007	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB008	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FL001	1-234-939-21 s	FILTER, EMI REMOVAL (SMD)
FL002	1-234-939-21 s	FILTER, EMI REMOVAL (SMD)
IC001	6-714-812-01 s	IC BD9870FPS-E2
IC003	6-712-135-01 o	IC R1173H001D-T1-FE
IC004	6-712-135-01 o	IC R1173H001D-T1-FE
IC007	8-759-644-10 s	IC MAX3491CSD+TG068
IC010	6-713-118-01 s	IC PCA9554BS-T
IC011	8-759-337-40 s	IC NJM2904V(Te2)
L001	1-457-735-11 s	CHOKE COIL 10UH
L002	1-457-526-11 s	INDUCTOR (2.2UH)
L003	1-481-035-11 s	INDUCTOR (10UH)
L004	1-481-035-11 s	INDUCTOR (10UH)
L005	1-481-035-11 s	INDUCTOR (10UH)
L006	1-469-549-21 s	INDUCTOR, CHIP 1.0UH (LB2016)
Q001	8-729-929-09 s	TRANSISTOR DTC123JE-TL
Q002	8-729-928-28 s	TRANSISTOR DTA144EE-TL
Q003	6-550-631-01 s	TRANSISTOR 2SA1797-T100-Q
Q004	8-729-929-09 s	TRANSISTOR DTC123JE-TL
Q005	8-729-929-09 s	TRANSISTOR DTC123JE-TL
Q007	8-729-929-09 s	TRANSISTOR DTC123JE-TL
Q008	8-729-928-05 s	TRANSISTOR 2SC4617TL-QR
Q009	8-729-929-09 s	TRANSISTOR DTC123JE-TL
R001	1-208-887-81 s	RES, CHIP 1.0K (1005)
R002	1-208-897-81 s	RES, CHIP 2.7K (1005)
R003	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R004	1-208-935-81 s	RES, CHIP 100K (1005)
R005	1-208-935-81 s	RES, CHIP 100K (1005)
R006	1-208-943-81 s	RES, CHIP 220K (1005)
R007	1-208-863-81 s	RES, CHIP 100 (1005)
R008	1-208-895-81 s	RES, CHIP 2.2K (1005)
R009	1-208-887-81 s	RES, CHIP 1.0K (1005)
R010	1-208-863-81 s	RES, CHIP 100 (1005)
R011	1-208-895-81 s	RES, CHIP 2.2K (1005)
R012	1-208-887-81 s	RES, CHIP 1.0K (1005)
R013	1-208-911-81 s	RES, CHIP 10K (1005)
R014	1-208-911-81 s	RES, CHIP 10K (1005)
R015	1-208-887-81 s	RES, CHIP 1.0K (1005)
R017	1-208-887-81 s	RES, CHIP 1.0K (1005)
R018	1-208-887-81 s	RES, CHIP 1.0K (1005)
R023	1-220-870-81 s	RES, CHIP 10 (1005)
R024	1-220-870-81 s	RES, CHIP 10 (1005)
R025	1-208-911-81 s	RES, CHIP 10K (1005)
R027	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R028	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R029	1-208-911-81 s	RES, CHIP 10K (1005)
R032	1-208-887-81 s	RES, CHIP 1.0K (1005)
R033	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R034	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R036	1-208-887-81 s	RES, CHIP 1.0K (1005)
R037	1-208-887-81 s	RES, CHIP 1.0K (1005)
R048	1-208-927-81 s	RES, CHIP 47K (1005)

IF-1262 BOARD

Ref. No. or Q'ty	Part No.	SP Description
R049	1-208-911-81 s	RES, CHIP 10K (1005)
R050	1-208-911-81 s	RES, CHIP 10K (1005)
R054	1-208-887-81 s	RES, CHIP 1.0K (1005)
R055	1-208-887-81 s	RES, CHIP 1.0K (1005)
R056	1-208-895-81 s	RES, CHIP 2.2K (1005)
R057	1-208-871-81 s	RES, CHIP 220 (1005)
R058	1-220-878-81 s	RES, CHIP 22 (1005)
R059	1-208-911-81 s	RES, CHIP 10K (1005)
R060	1-208-887-81 s	RES, CHIP 1.0K (1005)
R061	1-208-911-81 s	RES, CHIP 10K (1005)
R062	1-208-863-81 s	RES, CHIP 100 (1005)
R063	1-208-871-81 s	RES, CHIP 220 (1005)
R064	1-208-911-81 s	RES, CHIP 10K (1005)
R065	1-208-911-81 s	RES, CHIP 10K (1005)
R066	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R067	1-208-911-81 s	RES, CHIP 10K (1005)
R068	1-208-911-81 s	RES, CHIP 10K (1005)
R069	1-208-863-81 s	RES, CHIP 100 (1005)
R072	1-220-878-81 s	RES, CHIP 22 (1005)
R073	1-208-863-81 s	RES, CHIP 100 (1005)
R074	1-208-911-81 s	RES, CHIP 10K (1005)
R075	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R076	1-208-919-81 s	RES, CHIP 22K (1005)
R077	1-216-864-91 s	CONDUCTOR, CHIP (1608)
R078	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R079	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R080	1-208-911-81 s	RES, CHIP 10K (1005)
R081	1-208-923-81 s	RES, CHIP 33K (1005)
R082	1-208-891-81 s	RES, CHIP 1.5K (1005)
R083	1-218-863-91 s	RES, CHIP 4.7K (1608)
R086	1-208-927-81 s	RES, CHIP 47K (1005)
R087	1-208-927-81 s	RES, CHIP 47K (1005)
R088	1-208-919-81 s	RES, CHIP 22K (1005)
R091	1-216-864-91 s	CONDUCTOR, CHIP (1608)
R092	1-216-864-91 s	CONDUCTOR, CHIP (1608)
R093	1-208-863-81 s	RES, CHIP 100 (1005)
R094	1-220-870-81 s	RES, CHIP 10 (1005)
R095	1-220-870-81 s	RES, CHIP 10 (1005)
R105	1-220-870-81 s	RES, CHIP 10 (1005)
R106	1-220-870-81 s	RES, CHIP 10 (1005)
R107	1-208-911-81 s	RES, CHIP 10K (1005)
R108	1-208-911-81 s	RES, CHIP 10K (1005)
R109	1-208-911-81 s	RES, CHIP 10K (1005)
R110	1-208-911-81 s	RES, CHIP 10K (1005)
R111	1-208-919-81 s	RES, CHIP 22K (1005)
R112	1-208-935-81 s	RES, CHIP 100K (1005)
R113	1-208-895-81 s	RES, CHIP 2.2K (1005)
R115	1-208-927-81 s	RES, CHIP 47K (1005)
R116	1-208-895-81 s	RES, CHIP 2.2K (1005)
R117	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R118	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R119	1-208-881-81 s	RES, CHIP 560 (1005)
R120	1-216-864-91 s	CONDUCTOR, CHIP (1608)
R121	1-216-864-91 s	CONDUCTOR, CHIP (1608)
R122	1-216-864-91 s	CONDUCTOR, CHIP (1608)
R123	1-216-864-91 s	CONDUCTOR, CHIP (1608)
R124	1-216-864-91 s	CONDUCTOR, CHIP (1608)
RB002	1-234-380-21 s	RES, NETWORK 47K (1005X4)
RB003	1-234-380-21 s	RES, NETWORK 47K (1005X4)
RB004	1-234-380-21 s	RES, NETWORK 47K (1005X4)
RB005	1-234-380-21 s	RES, NETWORK 47K (1005X4)
TH001	△ 1-803-615-21 s	THERMISTOR, POSITIVE

LE-391 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1992-435-A	s MOUNTED CIRCUIT BOARD, LE-391
C1	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
CN1	1-785-946-21	s CONNECTOR 3P
D1	6-503-820-01	s DI KA-3021SURSK
D2	6-503-820-01	s DI KA-3021SURSK
D3	6-503-820-01	s DI KA-3021SURSK
D4	6-503-820-01	s DI KA-3021SURSK
R1	1-218-839-91	s RES, CHIP 470 (1608)
R3	1-218-839-91	s RES, CHIP 470 (1608)
R5	1-218-990-81	s CONDUCTOR, CHIP (1005)
R6	1-218-990-81	s CONDUCTOR, CHIP (1005)

SW-1592 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1992-436-A	s MOUNTED CIRCUIT BOARD, SW-1592
C001	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C002	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C003	1-118-403-11	s CAP, CERAMIC 1000PF X7R 1005
C004	1-118-403-11	s CAP, CERAMIC 1000PF X7R 1005
C005	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C006	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C007	1-118-403-11	s CAP, CERAMIC 1000PF X7R 1005
C008	1-118-399-11	s CAP, CERAMIC 2200PF X7R 1005
C009	1-118-403-11	s CAP, CERAMIC 1000PF X7R 1005
C010	1-118-399-11	s CAP, CERAMIC 2200PF X7R 1005
C011	1-118-403-11	s CAP, CERAMIC 1000PF X7R 1005
C012	1-118-403-11	s CAP, CERAMIC 1000PF X7R 1005
C013	1-118-391-11	s CAP, CERAMIC 0.01MF X7R 1005
C014	1-118-403-11	s CAP, CERAMIC 1000PF X7R 1005
C015	1-118-391-11	s CAP, CERAMIC 0.01MF X7R 1005
C016	1-118-403-11	s CAP, CERAMIC 1000PF X7R 1005
C017	1-118-403-11	s CAP, CERAMIC 1000PF X7R 1005
C018	1-118-391-11	s CAP, CERAMIC 0.01MF X7R 1005
C019	1-118-403-11	s CAP, CERAMIC 1000PF X7R 1005
C021	1-118-403-11	s CAP, CERAMIC 1000PF X7R 1005
C022	1-118-403-11	s CAP, CERAMIC 1000PF X7R 1005
C023	1-118-403-11	s CAP, CERAMIC 1000PF X7R 1005
C024	1-118-403-11	s CAP, CERAMIC 1000PF X7R 1005
C026	1-118-391-11	s CAP, CERAMIC 0.01MF X7R 1005
CN001	1-785-840-31	s CONNECTOR, FFC/FPC(ZIF) AN 15P
D1	6-502-598-01	s DI SML-D12U8WT86
D2	6-502-598-01	s DI SML-D12U8WT86
D3	6-501-358-01	s DIODE CL-197HG5-CD-T
D4	6-501-358-01	s DIODE CL-197HG5-CD-T
D5	6-502-598-01	s DI SML-D12U8WT86
D6	6-502-598-01	s DI SML-D12U8WT86
D7	6-501-358-01	s DIODE CL-197HG5-CD-T
D8	6-501-358-01	s DIODE CL-197HG5-CD-T
EN001	1-480-630-11	s ENCODER, ROTARY
IC001	6-713-118-01	s IC PCA9554BS-T
IC002	6-713-118-01	s IC PCA9554BS-T
Q001	8-729-928-91	s TRANSISTOR DTC114EE-TL
Q002	8-729-928-91	s TRANSISTOR DTC114EE-TL
R001	1-218-831-91	s RES, CHIP 220 (1608)
R002	1-208-883-81	s RES, CHIP 680 (1005)

SW-1592 BOARD

Ref. No. or Q'ty	Part No.	SP Description
R003	1-218-831-91	s RES, CHIP 220 (1608)
R004	1-208-883-81	s RES, CHIP 680 (1005)
R005	1-208-887-81	s RES, CHIP 1.0K (1005)
R006	1-208-887-81	s RES, CHIP 1.0K (1005)
R007	1-208-855-81	s RES, CHIP 47 (1005)
R008	1-208-855-81	s RES, CHIP 47 (1005)
R009	1-208-855-81	s RES, CHIP 47 (1005)
R010	1-208-855-81	s RES, CHIP 47 (1005)
R011	1-208-887-81	s RES, CHIP 1.0K (1005)
R013	1-208-871-81	s RES, CHIP 220 (1005)
R014	1-208-871-81	s RES, CHIP 220 (1005)
R015	1-208-887-81	s RES, CHIP 1.0K (1005)
R016	1-208-887-81	s RES, CHIP 1.0K (1005)
R017	1-208-887-81	s RES, CHIP 1.0K (1005)
R018	1-208-887-81	s RES, CHIP 1.0K (1005)
R019	1-208-887-81	s RES, CHIP 1.0K (1005)
R020	1-208-887-81	s RES, CHIP 1.0K (1005)
R021	1-208-887-81	s RES, CHIP 1.0K (1005)
R022	1-208-887-81	s RES, CHIP 1.0K (1005)
R023	1-208-887-81	s RES, CHIP 1.0K (1005)
R024	1-208-887-81	s RES, CHIP 1.0K (1005)
R025	1-208-887-81	s RES, CHIP 1.0K (1005)
R026	1-208-887-81	s RES, CHIP 1.0K (1005)
R027	1-208-887-81	s RES, CHIP 1.0K (1005)
R028	1-208-887-81	s RES, CHIP 1.0K (1005)
R029	1-218-831-91	s RES, CHIP 220 (1608)
R030	1-208-883-81	s RES, CHIP 680 (1005)
R031	1-218-831-91	s RES, CHIP 220 (1608)
R032	1-208-883-81	s RES, CHIP 680 (1005)
R033	1-208-887-81	s RES, CHIP 1.0K (1005)
RV001	1-237-696-11	s RES, VAR, CARBON 5K
RV002	1-237-696-11	s RES, VAR, CARBON 5K
RV003	1-237-696-11	s RES, VAR, CARBON 5K
S001	1-570-985-21	s SWITCH, TOGGLE
S002	1-570-608-11	s SWITCH, TOGGLE
S003	1-786-725-21	s SWITCH, TACTILE
S004	1-570-984-21	s SWITCH, TOGGLE
S005	1-786-725-21	s SWITCH, TACTILE
S006	1-786-725-21	s SWITCH, TACTILE
S007	1-570-608-11	s SWITCH, TOGGLE
S008	1-570-985-21	s SWITCH, TOGGLE
S009	1-786-725-21	s SWITCH, TACTILE

SW-1592A BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1992-431-A	s MOUNTED CIRCUIT BOARD, SW-1592A
C001	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C002	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C003	1-118-403-11	s CAP, CERAMIC 1000PF X7R 1005
C004	1-118-403-11	s CAP, CERAMIC 1000PF X7R 1005
C005	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C006	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C007	1-118-403-11	s CAP, CERAMIC 1000PF X7R 1005
C008	1-118-399-11	s CAP, CERAMIC 2200PF X7R 1005
C009	1-118-403-11	s CAP, CERAMIC 1000PF X7R 1005
C010	1-118-399-11	s CAP, CERAMIC 2200PF X7R 1005
C011	1-118-403-11	s CAP, CERAMIC 1000PF X7R 1005
C012	1-118-403-11	s CAP, CERAMIC 1000PF X7R 1005
C013	1-118-391-11	s CAP, CERAMIC 0.01MF X7R 1005
C014	1-118-403-11	s CAP, CERAMIC 1000PF X7R 1005

SW-1592A BOARD

Ref. No. or Q'ty	Part No.	SP Description
C015	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C016	1-118-403-11 s	CAP, CERAMIC 1000PF X7R 1005
C017	1-118-403-11 s	CAP, CERAMIC 1000PF X7R 1005
C018	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C019	1-118-403-11 s	CAP, CERAMIC 1000PF X7R 1005
C020	1-118-403-11 s	CAP, CERAMIC 1000PF X7R 1005
C023	1-118-403-11 s	CAP, CERAMIC 1000PF X7R 1005
C024	1-118-403-11 s	CAP, CERAMIC 1000PF X7R 1005
C025	1-118-403-11 s	CAP, CERAMIC 1000PF X7R 1005
C026	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
CN001	1-785-840-31 s	CONNECTOR, FFC/FPC(ZIF) AN 15P
D1	6-502-598-01 s	DI SML-D12U8WT86
D2	6-502-598-01 s	DI SML-D12U8WT86
D3	6-501-358-01 s	DIODE CL-197HG5-CD-T
D4	6-501-358-01 s	DIODE CL-197HG5-CD-T
D5	6-502-598-01 s	DI SML-D12U8WT86
D6	6-502-598-01 s	DI SML-D12U8WT86
D7	6-501-358-01 s	DIODE CL-197HG5-CD-T
D8	6-501-358-01 s	DIODE CL-197HG5-CD-T
EN001	1-480-630-11 s	ENCODER, ROTARY
IC001	6-713-118-01 s	IC PCA9554BS-T
IC002	6-713-118-01 s	IC PCA9554BS-T
Q001	8-729-928-91 s	TRANSISTOR DTC114EE-TL
Q002	8-729-928-91 s	TRANSISTOR DTC114EE-TL
R001	1-218-831-91 s	RES, CHIP 220 (1608)
R002	1-208-883-81 s	RES, CHIP 680 (1005)
R003	1-218-831-91 s	RES, CHIP 220 (1608)
R004	1-208-883-81 s	RES, CHIP 680 (1005)
R005	1-208-887-81 s	RES, CHIP 1.0K (1005)
R006	1-208-887-81 s	RES, CHIP 1.0K (1005)
R007	1-208-855-81 s	RES, CHIP 47 (1005)
R008	1-208-855-81 s	RES, CHIP 47 (1005)
R009	1-208-855-81 s	RES, CHIP 47 (1005)
R010	1-208-855-81 s	RES, CHIP 47 (1005)
R011	1-208-887-81 s	RES, CHIP 1.0K (1005)
R012	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R013	1-208-871-81 s	RES, CHIP 220 (1005)
R014	1-208-871-81 s	RES, CHIP 220 (1005)
R015	1-208-887-81 s	RES, CHIP 1.0K (1005)
R016	1-208-887-81 s	RES, CHIP 1.0K (1005)
R017	1-208-887-81 s	RES, CHIP 1.0K (1005)
R018	1-208-887-81 s	RES, CHIP 1.0K (1005)
R019	1-208-887-81 s	RES, CHIP 1.0K (1005)
R020	1-208-887-81 s	RES, CHIP 1.0K (1005)
R021	1-208-887-81 s	RES, CHIP 1.0K (1005)
R022	1-208-887-81 s	RES, CHIP 1.0K (1005)
R023	1-208-887-81 s	RES, CHIP 1.0K (1005)
R026	1-208-887-81 s	RES, CHIP 1.0K (1005)
R027	1-208-887-81 s	RES, CHIP 1.0K (1005)
R028	1-208-887-81 s	RES, CHIP 1.0K (1005)
R029	1-218-831-91 s	RES, CHIP 220 (1608)
R030	1-208-883-81 s	RES, CHIP 680 (1005)
R031	1-218-831-91 s	RES, CHIP 220 (1608)
R032	1-208-883-81 s	RES, CHIP 680 (1005)
R033	1-208-887-81 s	RES, CHIP 1.0K (1005)
RV001	1-237-696-11 s	RES, VAR, CARBON 5K
RV002	1-237-696-11 s	RES, VAR, CARBON 5K
RV003	1-237-696-11 s	RES, VAR, CARBON 5K
RV004	1-237-696-11 s	RES, VAR, CARBON 5K
RV005	1-237-696-11 s	RES, VAR, CARBON 5K
S001	1-570-985-21 s	SWITCH, TOGGLE

SW-1592A BOARD

Ref. No. or Q'ty	Part No.	SP Description
S002	1-570-608-11 s	SWITCH, TOGGLE
S003	1-786-725-21 s	SWITCH, TACTILE
S004	1-570-985-21 s	SWITCH, TOGGLE
S005	1-786-725-21 s	SWITCH, TACTILE
S006	1-786-725-21 s	SWITCH, TACTILE
S008	1-570-985-21 s	SWITCH, TOGGLE
S009	1-786-725-21 s	SWITCH, TACTILE

SW-1594 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1992-443-A s	MOUNTED CIRCUIT BOARD, SW-1594
C1	1-118-399-11 s	CAP, CERAMIC 2200PF X7R 1005
C2	1-118-399-11 s	CAP, CERAMIC 2200PF X7R 1005
C3	1-118-403-11 s	CAP, CERAMIC 1000PF X7R 1005
C4	1-118-403-11 s	CAP, CERAMIC 1000PF X7R 1005
CN1	1-785-900-21 s	CONNECTOR 5P
CN2	1-785-946-21 s	CONNECTOR 3P
FB1	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB2	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
R1	1-208-887-81 s	RES, CHIP 1.0K (1005)
R2	1-208-887-81 s	RES, CHIP 1.0K (1005)
S1	1-786-725-21 s	SWITCH, TACTILE
S2	1-786-725-21 s	SWITCH, TACTILE

SW-1595 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1992-432-A s	MOUNTED CIRCUIT BOARD, SW-1595
C1	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C2	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C4	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C5	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C6	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
CN1	1-770-623-21 s	PIN, CONNECTOR 6P
D1	6-502-598-01 s	DI SML-D12U8WT86
D2	6-501-358-01 s	DIODE CL-197HG5-CD-T
R1	1-208-887-81 s	RES, CHIP 1.0K (1005)
R2	1-208-887-81 s	RES, CHIP 1.0K (1005)
R3	1-208-863-81 s	RES, CHIP 100 (1005)
R4	1-208-887-81 s	RES, CHIP 1.0K (1005)
R5	1-208-887-81 s	RES, CHIP 1.0K (1005)
S1	1-762-123-21 s	SWITCH, TOGGLE

SY-427 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1992-428-A s	MOUNTED CIRCUIT BOARD, SY-427

SY-427 BOARD

Ref. No. or Q'ty	Part No.	SP Description
BT300	1-251-928-21 s	SOCKET, BATTERY
C100	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C102	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C105	1-100-597-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C106	1-116-865-11 s	CAP, CERAMIC 10MF X5R 3216
C107	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C108	1-116-865-11 s	CAP, CERAMIC 10MF X5R 3216
C109	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C111	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C112	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C113	1-100-597-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C114	1-116-865-11 s	CAP, CERAMIC 10MF X5R 3216
C115	1-100-597-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C116	1-100-597-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C117	1-118-036-11 s	CAP, CERAMIC 0.1MF X5R (1608)
C119	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C120	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C121	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C122	1-116-865-11 s	CAP, CERAMIC 10MF X5R 3216
C123	1-100-597-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C200	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C201	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C202	1-100-597-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C203	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C204	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C205	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C206	1-100-055-21 s	CAP, CHIP CERAMIC 22MF B 3225
C207	1-100-055-21 s	CAP, CHIP CERAMIC 22MF B 3225
C208	1-100-055-21 s	CAP, CHIP CERAMIC 22MF B 3225
C209	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C210	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C211	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C212	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C214	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C215	1-116-734-11 s	CAP, CERAMIC 1MF X5R 1608
C216	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C217	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C218	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C219	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C220	1-116-734-11 s	CAP, CERAMIC 1MF X5R 1608
C221	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C222	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C223	1-164-850-81 s	CAP, CHIP CERAMIC 10PF CH 1005
C225	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C226	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C227	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C228	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C229	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C230	1-100-597-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C231	1-116-350-21 s	CAP, CHIP CERAMIC 47UF B 2012
C232	1-116-350-21 s	CAP, CHIP CERAMIC 47UF B 2012
C233	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C234	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C236	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C239	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C240	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C241	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C242	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C243	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C244	1-164-850-81 s	CAP, CHIP CERAMIC 10PF CH 1005
C245	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C246	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C247	1-116-350-21 s	CAP, CHIP CERAMIC 47UF B 2012
C248	1-116-865-11 s	CAP, CERAMIC 10MF X5R 3216
C249	1-116-734-11 s	CAP, CERAMIC 1MF X5R 1608

SY-427 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C250	1-116-734-11 s	CAP, CERAMIC 1MF X5R 1608
C251	1-116-865-11 s	CAP, CERAMIC 10MF X5R 3216
C252	1-118-395-11 s	CAP, CERAMIC 4700PF X7R 1005
C253	1-116-865-11 s	CAP, CERAMIC 10MF X5R 3216
C254	1-118-395-11 s	CAP, CERAMIC 4700PF X7R 1005
C255	1-164-866-81 s	CAP, CHIP CERAMIC 47PF CH 1005
C256	1-164-866-81 s	CAP, CHIP CERAMIC 47PF CH 1005
C257	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C258	1-116-078-11 s	CAP, CERAMIC 1MF X6S 2012
C259	1-116-078-11 s	CAP, CERAMIC 1MF X6S 2012
C260	1-118-036-11 s	CAP, CERAMIC 0.1MF X5R (1608)
C261	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C262	1-116-082-11 s	CAP, CHIP ELECT 47MF (6.3X7.7)
C264	1-118-036-11 s	CAP, CERAMIC 0.1MF X5R (1608)
C265	1-116-865-11 s	CAP, CERAMIC 10MF X5R 3216
C266	1-118-407-11 o	CAP, CERAMIC 470PF X7R 1005
C267	1-116-082-11 s	CAP, CHIP ELECT 47MF (6.3X7.7)
C268	1-114-160-91 s	CAP, CHIP CERAMIC 1MF B 3225
C269	1-114-160-91 s	CAP, CHIP CERAMIC 1MF B 3225
C270	1-116-078-11 s	CAP, CERAMIC 1MF X6S 2012
C271	1-100-597-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C272	1-114-160-91 s	CAP, CHIP CERAMIC 1MF B 3225
C273	1-116-865-11 s	CAP, CERAMIC 10MF X5R 3216
C274	1-100-055-21 s	CAP, CHIP CERAMIC 22MF B 3225
C275	1-114-160-91 s	CAP, CHIP CERAMIC 1MF B 3225
C276	1-100-055-21 s	CAP, CHIP CERAMIC 22MF B 3225
C277	1-116-865-11 s	CAP, CERAMIC 10MF X5R 3216
C278	1-116-734-11 s	CAP, CERAMIC 1MF X5R 1608
C279	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C280	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C281	1-114-549-11 s	CAP, NIOBIUM ELECT 47UF
C282	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C283	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C284	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C300	1-116-724-11 s	CAP, CERAMIC 4.7MF X5R 1608
C301	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C302	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C303	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C304	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C305	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C306	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C307	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C308	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C309	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C310	1-118-388-11 s	CAP, CERAMIC 0.047MF X7R 1005
C311	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C312	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C313	1-118-418-11 s	CAP, CERAMIC 22MF X5R (2012)
C314	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C315	1-116-724-11 s	CAP, CERAMIC 4.7MF X5R 1608
C316	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C318	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C319	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C320	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C321	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C322	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C323	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C324	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C325	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C326	1-114-386-11 s	CAP, NIOBIUM ELECT 100MF 105
C327	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C328	1-100-880-91 s	CAP, CERAMIC 100MF C (3225)
C329	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C330	1-118-418-11 s	CAP, CERAMIC 22MF X5R (2012)
C331	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005

SY-427 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C942	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C943	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C944	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C945	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C946	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C947	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C948	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C949	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C950	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C951	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C952	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C953	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C954	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C955	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C956	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C957	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C958	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C959	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C960	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C961	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C962	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C963	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C964	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C965	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C966	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C967	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C968	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C969	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C970	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C971	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C972	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C973	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C974	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1000	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1001	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C1002	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C1003	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1005	1-164-840-81 s	CAP, CHIP CERAMIC 1PF CK 1005
C1006	1-164-840-81 s	CAP, CHIP CERAMIC 1PF CK 1005
C1007	1-164-840-81 s	CAP, CHIP CERAMIC 1PF CK 1005
C1008	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C1009	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1010	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C1011	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C1012	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1013	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1014	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C1015	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C1016	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1017	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1018	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C1019	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C1020	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C1021	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C1022	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C1023	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C1024	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C1025	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1100	1-126-405-21 s	CAP, CHIP ELECT 10MF (6.3X5.7)
C1101	1-118-036-11 s	CAP, CERAMIC 0.1MF X5R (1608)
C1102	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C1103	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1104	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1105	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C1106	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005

SY-427 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C1107	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C1108	1-100-055-21 s	CAP, CHIP CERAMIC 22MF B 3225
C1109	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1110	1-117-145-21 s	CAP, ELECT 1MF
C1111	1-117-145-21 s	CAP, ELECT 1MF
C1112	1-162-923-91 s	CAP, CERAMIC 47PF CH 1608
C1113	1-162-923-91 s	CAP, CERAMIC 47PF CH 1608
C1114	1-162-923-91 s	CAP, CERAMIC 47PF CH 1608
C1115	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1116	1-118-462-11 s	CAP, CERAMIC 1MF X5R 1005
C1117	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C1118	1-164-850-81 s	CAP, CHIP CERAMIC 10PF CH 1005
C1119	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1120	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1121	1-164-876-81 s	CAP,CHIP CERAMIC 120PF CH 1005
C1122	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1123	1-164-882-81 s	CAP,CHIP CERAMIC 220PF CH 1005
C1124	1-115-459-21 s	CAP, ELECT 47MF
C1125	1-164-882-81 s	CAP,CHIP CERAMIC 220PF CH 1005
C1126	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C1127	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1128	1-164-876-81 s	CAP,CHIP CERAMIC 120PF CH 1005
C1129	1-127-956-21 s	CAP, CHIP FILM 0.1MF (3225)
C1130	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C1131	1-165-908-91 s	CAP, CERAMIC 1MF B 1608
C1132	1-165-908-91 s	CAP, CERAMIC 1MF B 1608
C1200	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1201	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1204	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C1205	1-118-477-11 s	CAP, CERAMIC 2.2MF X5R 1005
C1206	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C1207	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1208	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1209	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C1210	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C1211	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C1212	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1213	1-118-477-11 s	CAP, CERAMIC 2.2MF X5R 1005
C1214	1-118-462-11 s	CAP, CERAMIC 1MF X5R 1005
C1215	1-118-462-11 s	CAP, CERAMIC 1MF X5R 1005
C1216	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C1217	1-118-407-11 o	CAP, CERAMIC 470PF X7R 1005
C1218	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C1219	1-118-407-11 o	CAP, CERAMIC 470PF X7R 1005
C1220	1-118-459-11 s	CAP, CERAMIC 0.01MF X5R 1005
C1221	1-118-459-11 s	CAP, CERAMIC 0.01MF X5R 1005
C1222	1-118-403-11 s	CAP, CERAMIC 1000PF X7R 1005
C1223	1-118-407-11 o	CAP, CERAMIC 470PF X7R 1005
C1224	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C1225	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1226	1-118-477-11 s	CAP, CERAMIC 2.2MF X5R 1005
C1228	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C1229	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C1230	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1231	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1232	1-118-462-11 s	CAP, CERAMIC 1MF X5R 1005
C1233	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C1234	1-118-462-11 s	CAP, CERAMIC 1MF X5R 1005
C1235	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C1236	1-118-462-11 s	CAP, CERAMIC 1MF X5R 1005
C1237	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C1238	1-118-462-11 s	CAP, CERAMIC 1MF X5R 1005
C1239	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C1240	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C1241	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005

SY-427 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C1242	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C1243	1-164-850-81 s	CAP, CHIP CERAMIC 10PF CH 1005
C1244	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C1245	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1246	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1247	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1248	1-116-724-11 s	CAP, CERAMIC 4.7MF X5R 1608
C1302	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1303	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C1304	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1305	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C1306	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1307	1-118-477-11 s	CAP, CERAMIC 2.2MF X5R 1005
C1308	1-118-462-11 s	CAP, CERAMIC 1MF X5R 1005
C1309	1-118-462-11 s	CAP, CERAMIC 1MF X5R 1005
C1310	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C1311	1-118-407-11 o	CAP, CERAMIC 470PF X7R 1005
C1312	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1313	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C1314	1-118-462-11 s	CAP, CERAMIC 1MF X5R 1005
C1315	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C1316	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C1317	1-118-407-11 o	CAP, CERAMIC 470PF X7R 1005
C1318	1-118-407-11 o	CAP, CERAMIC 470PF X7R 1005
C1319	1-118-477-11 s	CAP, CERAMIC 2.2MF X5R 1005
C1320	1-118-477-11 s	CAP, CERAMIC 2.2MF X5R 1005
C1321	1-118-477-11 s	CAP, CERAMIC 2.2MF X5R 1005
C1322	1-118-477-11 s	CAP, CERAMIC 2.2MF X5R 1005
C1323	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1324	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1325	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C1326	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C1327	1-118-399-11 s	CAP, CERAMIC 2200PF X7R 1005
C1328	1-118-399-11 s	CAP, CERAMIC 2200PF X7R 1005
C1329	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1330	1-118-040-11 s	CAP, CERAMIC 2.2MF X5R (1608)
C1331	1-118-040-11 s	CAP, CERAMIC 2.2MF X5R (1608)
C1332	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C1333	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C1334	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C1335	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C1336	1-115-153-21 s	CAP, ELECT 4.7MF
C1337	1-115-153-21 s	CAP, ELECT 4.7MF
C1338	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1341	1-118-407-11 o	CAP, CERAMIC 470PF X7R 1005
C1342	1-118-407-11 o	CAP, CERAMIC 470PF X7R 1005
C1343	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C1344	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C1345	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C1346	1-126-396-21 s	CAP, CHIP ELECT 47MF (6.3X5.7)
C1347	1-126-396-21 s	CAP, CHIP ELECT 47MF (6.3X5.7)
C1350	1-100-055-21 s	CAP, CHIP CERAMIC 22MF B 3225
C1400	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C1401	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C1402	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1403	1-118-399-11 s	CAP, CERAMIC 2200PF X7R 1005
C1404	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1405	1-100-055-21 s	CAP, CHIP CERAMIC 22MF B 3225
C1406	1-100-055-21 s	CAP, CHIP CERAMIC 22MF B 3225
C1407	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1408	1-117-145-21 s	CAP, ELECT 1MF
C1409	1-117-145-21 s	CAP, ELECT 1MF
C1410	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1411	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1412	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005

SY-427 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C1413	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C1414	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1415	1-164-866-81 s	CAP, CHIP CERAMIC 47PF CH 1005
C1416	1-164-876-81 s	CAP,CHIP CERAMIC 120PF CH 1005
C1417	1-164-882-81 s	CAP,CHIP CERAMIC 220PF CH 1005
C1418	1-115-459-21 s	CAP, ELECT 47MF
C1419	1-164-882-81 s	CAP,CHIP CERAMIC 220PF CH 1005
C1420	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C1421	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1422	1-164-876-81 s	CAP,CHIP CERAMIC 120PF CH 1005
C1423	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C1424	1-127-956-21 s	CAP, CHIP FILM 0.1MF (3225)
C1425	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C1426	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1427	1-118-417-11 s	CAP, CERAMIC 0.1MF X5R 1005
C1428	1-112-791-11 s	CAP, ELECT 100MF
C1429	1-116-734-11 s	CAP, CERAMIC 1MF X5R 1608
C1430	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C1431	1-116-734-11 s	CAP, CERAMIC 1MF X5R 1608
C1432	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C1433	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C1434	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C1435	1-114-214-81 s	CAP,CHIP CERAMIC470PF CH1005
C1436	1-164-866-81 s	CAP, CHIP CERAMIC 47PF CH 1005
C1437	1-164-866-81 s	CAP, CHIP CERAMIC 47PF CH 1005
C1438	1-116-734-11 s	CAP, CERAMIC 1MF X5R 1608
C1440	1-100-055-21 s	CAP, CHIP CERAMIC 22MF B 3225
C1442	1-126-396-21 s	CAP, CHIP ELECT 47MF (6.3X5.7)
C1443	1-100-055-21 s	CAP, CHIP CERAMIC 22MF B 3225
C1444	1-126-396-21 s	CAP, CHIP ELECT 47MF (6.3X5.7)
C1445	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C1446	1-118-036-11 s	CAP, CERAMIC 0.1MF X5R (1608)
C1447	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C1448	1-126-405-21 s	CAP, CHIP ELECT 10MF (6.3X5.7)
C1449	1-114-214-81 s	CAP,CHIP CERAMIC470PF CH1005
C1450	1-118-036-11 s	CAP, CERAMIC 0.1MF X5R (1608)
C1451	1-112-800-11 s	CAP, ELECT 100MF
C1452	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1453	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C1454	1-118-462-11 s	CAP, CERAMIC 1MF X5R 1005
C1455	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C1456	1-118-462-11 s	CAP, CERAMIC 1MF X5R 1005
C1458	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C1459	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C1460	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C1461	1-114-214-81 s	CAP,CHIP CERAMIC470PF CH1005
C1462	1-164-866-81 s	CAP, CHIP CERAMIC 47PF CH 1005
C1464	1-100-055-21 s	CAP, CHIP CERAMIC 22MF B 3225
C1465	1-100-055-21 s	CAP, CHIP CERAMIC 22MF B 3225
C1466	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C1467	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
CN100	1-779-522-31 s	CONNECTOR, FFC/FPC(ZIF) AN 40P
CN101	1-779-522-31 s	CONNECTOR, FFC/FPC(ZIF) AN 40P
CN102	1-770-628-21 s	PIN, CONNECTOR 11P
CN103	1-819-308-21 s	PIN, CONNECTOR 15P
CN104	1-819-308-21 s	PIN, CONNECTOR 15P
CN106	1-770-622-21 s	PIN, CONNECTOR 5P
CN107	1-794-538-21 s	PIN, CONNECTOR (FOR PWB) 40P
CN108	1-770-625-21 s	PIN, CONNECTOR 8P
CN109	1-770-620-21 s	PIN, CONNECTOR 3P
CN110	1-770-626-21 s	PIN, CONNECTOR 9P
CN111	1-785-840-31 s	CONNECTOR, FFC/FPC(ZIF) AN 15P
CN112	1-785-840-31 s	CONNECTOR, FFC/FPC(ZIF) AN 15P
CN113	1-750-005-21 o	PIN, CONNECTOR (PC BOARD) 4P
CN300	1-774-260-31 s	CONNECTOR, FFC/FPC(ZIF) AN 20P

SY-427 BOARD

Ref. No. or Q'ty	Part No.	SP Description
CN301	1-770-620-21 s	PIN, CONNECTOR 3P
CN303	1-843-199-11 o	USB CONNECTOR
CN304	1-794-340-21 s	CONNECTOR, BOARD TO BOARD 120P
CN900	1-770-627-21 s	PIN, CONNECTOR 10P
CN1200	1-695-479-21 o	PIN, CONNECTOR (PC BOARD) 2P
D100	8-719-069-59 s	DI UDZSUSTE-178.2B
D101	6-501-123-01 s	DIODE RB160M-60TR
D200	8-719-083-83 s	DI UDZSUSTE-1715B
D201	8-719-083-60 s	DI UDZSUSTE-174.7B
D202	8-719-083-60 s	DI UDZSUSTE-174.7B
D203	8-719-083-60 s	DI UDZSUSTE-174.7B
D204	8-719-083-60 s	DI UDZSUSTE-174.7B
D205	8-719-083-60 s	DI UDZSUSTE-174.7B
D206	8-719-024-71 s	DIODE 1SS362-TE85L
D207	6-502-197-01 s	DI SML-D12M8WT86SM
D208	6-501-123-01 s	DIODE RB160M-60TR
D209	8-719-072-43 s	DIODE RB050L-40TE25
D210	6-502-197-01 s	DI SML-D12M8WT86SM
D211	6-501-123-01 s	DIODE RB160M-60TR
D212	6-501-123-01 s	DIODE RB160M-60TR
D213	8-719-083-83 s	DI UDZSUSTE-1715B
D214	8-719-056-48 s	DI 1SS388
D215	8-719-083-83 s	DI UDZSUSTE-1715B
D216	8-719-056-48 s	DI 1SS388
D300	6-502-197-01 s	DI SML-D12M8WT86SM
D301	8-719-024-71 s	DIODE 1SS362-TE85L
D302	8-719-024-71 s	DIODE 1SS362-TE85L
D303	6-500-122-01 s	DIODE CL-375HR/YG-D-TS
D400	8-719-024-71 s	DIODE 1SS362-TE85L
D401	8-719-024-71 s	DIODE 1SS362-TE85L
D402	8-719-024-71 s	DIODE 1SS362-TE85L
D600	8-719-083-60 s	DI UDZSUSTE-174.7B
D601	8-719-083-60 s	DI UDZSUSTE-174.7B
D602	8-719-024-71 s	DIODE 1SS362-TE85L
D603	8-719-056-65 s	DIODE 1SS372-TE85L
D604	8-719-024-71 s	DIODE 1SS362-TE85L
D605	8-719-024-71 s	DIODE 1SS362-TE85L
D606	8-719-056-65 s	DIODE 1SS372-TE85L
D607	8-719-056-48 s	DI 1SS388
D608	8-719-056-48 s	DI 1SS388
D609	8-719-024-71 s	DIODE 1SS362-TE85L
D1100	8-719-024-71 s	DIODE 1SS362-TE85L
D1101	8-719-024-71 s	DIODE 1SS362-TE85L
D1102	8-719-989-04 s	DIODE DAN222-TL
D1103	8-719-989-04 s	DIODE DAN222-TL
D1104	8-719-024-71 s	DIODE 1SS362-TE85L
D1105	8-719-024-71 s	DIODE 1SS362-TE85L
D1200	6-500-696-01 s	DI UDZSUSTE-173.0B
D1201	6-500-696-01 s	DI UDZSUSTE-173.0B
D1202	8-719-069-56 s	DI UDZSUSTE-176.2B
D1204	8-719-069-54 s	DI UDZSUSTE-175.1B
D1205	8-719-069-54 s	DI UDZSUSTE-175.1B
D1300	8-719-024-71 s	DIODE 1SS362-TE85L
D1400	8-719-024-71 s	DIODE 1SS362-TE85L
D1401	8-719-083-66 s	DI UDZSUSTE-1718B
D1402	8-719-083-66 s	DI UDZSUSTE-1718B
D1403	8-719-083-66 s	DI UDZSUSTE-1718B
D1404	8-719-083-66 s	DI UDZSUSTE-1718B
D1405	6-502-598-01 s	DI SML-D12U8WT86
E100	1-535-877-22 s	CHIP, CHECKER
E101	1-535-877-22 s	CHIP, CHECKER
E102	1-535-877-22 s	CHIP, CHECKER
E103	1-535-877-22 s	CHIP, CHECKER
E104	1-535-877-22 s	CHIP, CHECKER

SY-427 BOARD

Ref. No. or Q'ty	Part No.	SP Description
E105	1-535-877-22 s	CHIP, CHECKER
E500	1-535-877-22 s	CHIP, CHECKER
E501	1-535-877-22 s	CHIP, CHECKER
FB100	1-400-832-21 s	SMD EMI FERRITE
FB103	1-400-832-21 s	SMD EMI FERRITE
FB104	1-400-832-21 s	SMD EMI FERRITE
FB107	1-400-832-21 s	SMD EMI FERRITE
FB108	1-400-832-21 s	SMD EMI FERRITE
FB109	1-400-832-21 s	SMD EMI FERRITE
FB110	1-400-832-21 s	SMD EMI FERRITE
FB111	1-400-832-21 s	SMD EMI FERRITE
FB112	1-414-772-21 s	FERRITE. EMI (SMD) (2012)
FB113	1-414-772-21 s	FERRITE. EMI (SMD) (2012)
FB114	1-414-772-21 s	FERRITE. EMI (SMD) (2012)
FB115	1-414-772-21 s	FERRITE. EMI (SMD) (2012)
FB116	1-400-832-21 s	SMD EMI FERRITE
FB117	1-400-832-21 s	SMD EMI FERRITE
FB118	1-400-832-21 s	SMD EMI FERRITE
FB119	1-400-832-21 s	SMD EMI FERRITE
FB120	1-400-832-21 s	SMD EMI FERRITE
FB121	1-400-832-21 s	SMD EMI FERRITE
FB122	1-400-832-21 s	SMD EMI FERRITE
FB123	1-400-832-21 s	SMD EMI FERRITE
FB124	1-400-832-21 s	SMD EMI FERRITE
FB125	1-414-772-21 s	FERRITE. EMI (SMD) (2012)
FB126	1-414-772-21 s	FERRITE. EMI (SMD) (2012)
FB127	1-400-832-21 s	SMD EMI FERRITE
FB128	1-400-832-21 s	SMD EMI FERRITE
FB129	1-400-462-21 s	FERRITE, EMI (SMD) (1005)
FB130	1-400-462-21 s	FERRITE, EMI (SMD) (1005)
FB131	1-400-462-21 s	FERRITE, EMI (SMD) (1005)
FB132	1-400-462-21 s	FERRITE, EMI (SMD) (1005)
FB133	1-400-832-21 s	SMD EMI FERRITE
FB134	1-400-832-21 s	SMD EMI FERRITE
FB135	1-400-832-21 s	SMD EMI FERRITE
FB136	1-400-832-21 s	SMD EMI FERRITE
FB137	1-400-832-21 s	SMD EMI FERRITE
FB138	1-400-832-21 s	SMD EMI FERRITE
FB139	1-400-832-21 s	SMD EMI FERRITE
FB140	1-400-832-21 s	SMD EMI FERRITE
FB141	1-400-832-21 s	SMD EMI FERRITE
FB142	1-400-832-21 s	SMD EMI FERRITE
FB143	1-400-462-21 s	FERRITE, EMI (SMD) (1005)
FB144	1-400-462-21 s	FERRITE, EMI (SMD) (1005)
FB147	1-400-462-21 s	FERRITE, EMI (SMD) (1005)
FB148	1-400-832-21 s	SMD EMI FERRITE
FB149	1-400-832-21 s	SMD EMI FERRITE
FB150	1-400-832-21 s	SMD EMI FERRITE
FB151	1-400-462-21 s	FERRITE, EMI (SMD) (1005)
FB152	1-400-462-21 s	FERRITE, EMI (SMD) (1005)
FB153	1-400-462-21 s	FERRITE, EMI (SMD) (1005)
FB154	1-400-462-21 s	FERRITE, EMI (SMD) (1005)
FB155	1-400-462-21 s	FERRITE, EMI (SMD) (1005)
FB156	1-414-772-21 s	FERRITE. EMI (SMD) (2012)
FB157	1-414-772-21 s	FERRITE. EMI (SMD) (2012)
FB200	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB201	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB202	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB203	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB204	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB205	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB206	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB207	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB208	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB209	1-469-094-21 s	FERRITE, EMI (SMD) (1608)

SY-427 BOARD

Ref. No. or Q'ty	Part No.	SP Description
FB210	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB211	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB212	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB213	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB214	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB215	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB300	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB302	1-400-832-21 s	SMD EMI FERRITE
FB303	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB304	1-400-832-21 s	SMD EMI FERRITE
FB305	1-400-832-21 s	SMD EMI FERRITE
FB306	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB307	1-400-832-21 s	SMD EMI FERRITE
FB308	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB309	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB310	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB500	1-414-772-21 s	FERRITE, EMI (SMD) (2012)
FB501	1-414-772-21 s	FERRITE, EMI (SMD) (2012)
FB502	1-414-772-21 s	FERRITE, EMI (SMD) (2012)
FB503	1-414-772-21 s	FERRITE, EMI (SMD) (2012)
FB504	1-400-462-21 s	FERRITE, EMI (SMD) (1005)
FB600	1-414-772-21 s	FERRITE, EMI (SMD) (2012)
FB700	1-414-445-21 s	FERRITE, EMI (SMD) (1608)
FB701	1-414-445-21 s	FERRITE, EMI (SMD) (1608)
FB702	1-400-832-21 s	SMD EMI FERRITE
FB703	1-400-832-21 s	SMD EMI FERRITE
FB704	1-414-445-21 s	FERRITE, EMI (SMD) (1608)
FB900	1-400-462-21 s	FERRITE, EMI (SMD) (1005)
FB901	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB902	1-400-462-21 s	FERRITE, EMI (SMD) (1005)
FB903	1-400-462-21 s	FERRITE, EMI (SMD) (1005)
FB904	1-400-462-21 s	FERRITE, EMI (SMD) (1005)
FB905	1-400-462-21 s	FERRITE, EMI (SMD) (1005)
FB906	1-400-462-21 s	FERRITE, EMI (SMD) (1005)
FB907	1-400-462-21 s	FERRITE, EMI (SMD) (1005)
FB908	1-400-462-21 s	FERRITE, EMI (SMD) (1005)
FB909	1-400-462-21 s	FERRITE, EMI (SMD) (1005)
FB910	1-400-462-21 s	FERRITE, EMI (SMD) (1005)
FB911	1-400-832-21 s	SMD EMI FERRITE
FB1000	1-400-832-21 s	SMD EMI FERRITE
FB1001	1-400-832-21 s	SMD EMI FERRITE
FB1002	1-400-832-21 s	SMD EMI FERRITE
FB1003	1-400-832-21 s	SMD EMI FERRITE
FB1004	1-400-832-21 s	SMD EMI FERRITE
FB1005	1-400-832-21 s	SMD EMI FERRITE
FB1006	1-400-832-21 s	SMD EMI FERRITE
FB1007	1-400-832-21 s	SMD EMI FERRITE
FB1009	1-414-445-21 s	FERRITE, EMI (SMD) (1608)
FB1010	1-414-445-21 s	FERRITE, EMI (SMD) (1608)
FB1100	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB1101	1-400-832-21 s	SMD EMI FERRITE
FB1200	1-400-832-21 s	SMD EMI FERRITE
FB1300	1-400-832-21 s	SMD EMI FERRITE
FB1400	1-400-832-21 s	SMD EMI FERRITE
FB1401	1-414-772-21 s	FERRITE, EMI (SMD) (2012)
FB1402	1-414-772-21 s	FERRITE, EMI (SMD) (2012)
FL1000	1-813-544-11 s	FILTER, LOW PASS
FL1001	1-813-543-11 s	FILTER, LOW PASS
FL1002	1-813-543-11 s	FILTER, LOW PASS
FL1003	1-233-345-21 s	FILTER, LOW PASS (5.5MHZ)
FL1004	1-233-316-31 s	FILTER, CHIP EMI
FL1005	1-233-316-31 s	FILTER, CHIP EMI
FL1006	1-233-316-31 s	FILTER, CHIP EMI
IC200	6-704-976-01 s	IC ADR381ARTZ-REEL7

SY-427 BOARD

Ref. No. or Q'ty	Part No.	SP Description
IC201	6-706-220-01 s	IC LTC3411EMS#TR
IC203	6-706-220-01 s	IC LTC3411EMS#TR
IC204	6-712-135-01 o	IC R1173H001D-T1-FE
IC205	8-759-598-43 s	IC TC7WH04FK
IC206	8-759-327-01 s	IC NJM062V (TE2)
IC207	8-759-327-01 s	IC NJM062V (TE2)
IC208	8-759-327-01 s	IC NJM062V (TE2)
IC209	6-705-480-01 s	IC LT3467ES6#TR
IC210	6-705-480-01 s	IC LT3467ES6#TR
IC211	6-711-852-01 s	IC LTC1844ES5-BYP
IC212	8-759-327-01 s	IC NJM062V (TE2)
IC300	6-712-135-01 o	IC R1173H001D-T1-FE
IC301	6-704-566-01 s	IC R3112N291A-TR-FE
IC302	8-759-656-54 s	IC TC7WH14FK
IC303	6-710-988-01 s	IC TC74VCX16843 (EL,F)
IC304	6-712-135-01 o	IC R1173H001D-T1-FE
IC305	8-759-598-44 s	IC TC7WH08FK
IC306	6-706-484-01 s	IC TC7SH04FU
IC307	6-712-135-01 o	IC R1173H001D-T1-FE
IC309	6-715-164-01 s	IC TPS2553DBVR
IC310	6-708-478-01 s	IC RX-8025NB
IC312	6-706-487-01 s	IC TC7SH08FU
IC313	6-600-060-01 s	IC TC7WZ32FK
IC314	6-600-060-01 s	IC TC7WZ32FK
IC400	6-706-476-01 s	IC TC7SET04FU
IC401	6-706-476-01 s	IC TC7SET04FU
IC402	6-706-476-01 s	IC TC7SET04FU
IC403	6-706-484-01 s	IC TC7SH04FU
IC405	6-706-487-01 s	IC TC7SH08FU
IC406	6-706-487-01 s	IC TC7SH08FU
IC408	6-706-487-01 s	IC TC7SH08FU
IC409	6-706-488-01 s	IC TC7SH14FU
IC410	6-704-555-01 o	IC TC7PA04FU (TE85R)
IC412	8-759-831-52 s	IC TC7WH125FK
IC413	8-759-831-52 s	IC TC7WH125FK
IC414	8-759-656-54 s	IC TC7WH14FK
IC415	8-759-831-52 s	IC TC7WH125FK
IC416	6-704-555-01 o	IC TC7PA04FU (TE85R)
IC417	6-706-487-01 s	IC TC7SH08FU
IC418	6-711-443-01 s	IC TC74VHCT125AFK (E,K)
IC419	8-759-831-52 s	IC TC7WH125FK
IC501	6-711-489-01 s	IC TC74VCX244FK (EL)
IC502	6-711-489-01 s	IC TC74VCX244FK (EL)
IC503	6-711-489-01 s	IC TC74VCX244FK (EL)
IC504	6-701-917-01 s	IC TC7PA34FU (TE85R)
IC505	6-711-489-01 s	IC TC74VCX244FK (EL)
IC506	6-704-555-01 o	IC TC7PA04FU (TE85R)
IC507	6-704-555-01 o	IC TC7PA04FU (TE85R)
IC509	6-704-555-01 o	IC TC7PA04FU (TE85R)
IC510	8-759-092-83 s	IC SN75158PSR
IC511	8-759-598-44 s	IC TC7WH08FK
IC512	6-701-917-01 s	IC TC7PA34FU (TE85R)
IC513	6-706-487-01 s	IC TC7SH08FU
IC514	6-706-487-01 s	IC TC7SH08FU
IC600	6-708-346-01 s	IC DAC7512N
IC602	6-711-448-01 s	IC TC74VHCT244AFK (E,K)
IC603	6-718-398-01 s	IC ADC128S022CIMTX
IC605	6-712-389-01 s	IC TC74VHC4051AFK (EK)
IC606	8-759-669-66 s	IC TLC2722CPWR-12
IC607	8-759-327-01 s	IC NJM062V (TE2)
IC608	8-759-327-01 s	IC NJM062V (TE2)
IC609	8-759-327-01 s	IC NJM062V (TE2)
IC610	8-759-327-01 s	IC NJM062V (TE2)
IC700	6-706-478-01 s	IC TC7SET08FU
IC701	6-706-478-01 s	IC TC7SET08FU

SY-427 BOARD

Ref. No. or Q'ty	Part No.	SP Description
IC702	8-759-327-01 s	IC NJM062V (TE2)
IC704	8-759-485-24 s	IC MC74HC4046ADTR2
IC705	6-706-484-01 s	IC TC7SH04FU
IC801	6-711-915-01 s	IC LM73CIMK-0
IC900	6-716-953-01 s	IC W25Q64CVSSIG
IC901	6-706-487-01 s	IC TC7SH08FU
IC902	6-701-917-01 s	IC TC7PA34FU (TE85R)
IC903	8-759-831-52 s	IC TC7WH125FK
IC904	8-759-831-52 s	IC TC7WH125FK
IC905	8-759-831-52 s	IC TC7WH125FK
IC906	8-759-831-52 s	IC TC7WH125FK
IC907	6-704-555-01 o	IC TC7PA04FU (TE85R)
IC908	8-759-831-52 s	IC TC7WH125FK
IC1000	8-759-561-46 s	IC AD8014ARTZ-REEL7
IC1001	8-759-561-46 s	IC AD8014ARTZ-REEL7
IC1002	8-759-561-46 s	IC AD8014ARTZ-REEL7
IC1003	8-759-561-46 s	IC AD8014ARTZ-REEL7
IC1100	8-759-644-10 s	IC MAX3491CSD+TG068
IC1101	6-706-484-01 s	IC TC7SH04FU
IC1102	6-711-443-01 s	IC TC74VHCT125AFK (E,K)
IC1103	6-712-388-01 s	IC TC74VHC4053AFK (EK)
IC1104	6-712-388-01 s	IC TC74VHC4053AFK (EK)
IC1105	6-711-116-01 s	IC NJM2878F3-05 (TE2)
IC1109	6-710-823-01 o	IC NJM2737RB1 (TE2)
IC1200	8-759-598-43 s	IC TC7WH04FK
IC1201	8-759-598-43 s	IC TC7WH04FK
IC1202	6-700-563-01 s	IC AK4552VT-E2
IC1203	6-718-338-01 s	IC AK5381VT-E2
IC1204	6-711-116-01 s	IC NJM2878F3-05 (TE2)
IC1205	6-711-116-01 s	IC NJM2878F3-05 (TE2)
IC1206	6-711-237-01 s	IC NJM2878F3-33 (TE2)
IC1207	6-704-566-01 s	IC R3112N291A-TR-FE
IC1208	6-706-476-01 s	IC TC7SET04FU
IC1210	6-706-906-01 s	IC NJM2732RB1 (TE2)
IC1211	6-706-906-01 s	IC NJM2732RB1 (TE2)
IC1212	8-759-287-55 s	IC TC7S66FU (TE85R)
IC1213	6-710-823-01 o	IC NJM2737RB1 (TE2)
IC1214	6-706-482-01 s	IC TC7SH00FU
IC1215	8-759-327-01 s	IC NJM062V (TE2)
IC1216	6-706-487-01 s	IC TC7SH08FU
IC1217	8-759-598-44 s	IC TC7WH08FK
IC1218	8-759-598-44 s	IC TC7WH08FK
IC1219	8-759-338-95 s	IC NJM2903V (TE2)
IC1300	8-759-598-43 s	IC TC7WH04FK
IC1301	6-700-563-01 s	IC AK4552VT-E2
IC1302	6-701-111-01 s	IC AK4382AVT-E2
IC1303	6-706-906-01 s	IC NJM2732RB1 (TE2)
IC1304	6-706-906-01 s	IC NJM2732RB1 (TE2)
IC1305	8-759-422-21 s	IC NJM4580V (TE2)
IC1306	6-706-906-01 s	IC NJM2732RB1 (TE2)
IC1400	6-711-443-01 s	IC TC74VHCT125AFK (E,K)
IC1401	6-712-388-01 s	IC TC74VHC4053AFK (EK)
IC1402	8-759-675-54 s	IC TC7W53FK (TE85R)
IC1403	6-706-484-01 s	IC TC7SH04FU
IC1404	8-759-675-54 s	IC TC7W53FK (TE85R)
IC1405	8-759-356-17 s	IC NJM4556AM-A-TE2
IC1406	8-759-327-01 s	IC NJM062V (TE2)
IC1407	6-706-906-01 s	IC NJM2732RB1 (TE2)
IC1408	6-704-960-01 s	IC NJM2172V (TE2)
IC1409	6-708-346-01 s	IC DAC7512N
IC1410	8-759-356-17 s	IC NJM4556AM-A-TE2
L100	1-457-165-21 s	COMMON MODE CHOKE COIL
L200	1-419-630-21 s	COIL, CHOKE 4.7UH
L201	1-419-630-21 s	COIL, CHOKE 4.7UH
L202	1-457-455-11 s	CHOKE COIL 10UH

SY-427 BOARD

Ref. No. or Q'ty	Part No.	SP Description
L203	1-457-454-11 s	CHOKE COIL 47UH
L204	1-416-606-21 s	COIL, CHOKE (SMD) 47UH
L205	1-469-559-21 s	INDUCTOR, CHIP 47UH (LB2016)
L300	1-481-265-21 s	COMMON MODE CHOKE COIL
L1000	1-414-840-21 s	INDUCTOR, CHIP 10NH (1005)
L1001	1-414-840-21 s	INDUCTOR, CHIP 10NH (1005)
PH500	8-749-014-35 s	IC HCPL-0630-500
Q100	8-729-928-05 s	TRANSISTOR 2SC4617TL-QR
Q200	6-550-632-01 s	TRANSISTOR 2SC4672-T100-Q
Q201	8-729-928-91 s	TRANSISTOR DTC114EE-TL
Q202	6-550-631-01 s	TRANSISTOR 2SA1797-T100-Q
Q203	6-550-632-01 s	TRANSISTOR 2SC4672-T100-Q
Q204	6-550-631-01 s	TRANSISTOR 2SA1797-T100-Q
Q205	6-550-632-01 s	TRANSISTOR 2SC4672-T100-Q
Q206	6-550-631-01 s	TRANSISTOR 2SA1797-T100-Q
Q207	8-729-928-91 s	TRANSISTOR DTC114EE-TL
Q208	8-729-928-91 s	TRANSISTOR DTC114EE-TL
Q209	8-729-928-37 s	TRANSISTOR DTA114EE-TL
Q211	8-729-928-91 s	TRANSISTOR DTC114EE-TL
Q212	8-729-928-05 s	TRANSISTOR 2SC4617TL-QR
Q213	6-550-632-01 s	TRANSISTOR 2SC4672-T100-Q
Q300	8-729-929-09 s	TRANSISTOR DTC123JE-TL
Q301	8-729-929-09 s	TRANSISTOR DTC123JE-TL
Q302	8-729-929-09 s	TRANSISTOR DTC123JE-TL
Q303	8-729-929-09 s	TRANSISTOR DTC123JE-TL
Q400	8-729-928-05 s	TRANSISTOR 2SC4617TL-QR
Q401	8-729-928-25 s	TRANSISTOR 2SA1774TL-QR
Q402	8-729-928-25 s	TRANSISTOR 2SA1774TL-QR
Q403	8-729-928-91 s	TRANSISTOR DTC114EE-TL
Q404	8-729-928-91 s	TRANSISTOR DTC114EE-TL
Q405	8-729-928-91 s	TRANSISTOR DTC114EE-TL
Q406	8-729-928-91 s	TRANSISTOR DTC114EE-TL
Q407	8-729-928-91 s	TRANSISTOR DTC114EE-TL
Q410	8-729-928-91 s	TRANSISTOR DTC114EE-TL
Q500	8-729-928-91 s	TRANSISTOR DTC114EE-TL
Q501	8-729-928-91 s	TRANSISTOR DTC114EE-TL
Q1100	6-550-632-01 s	TRANSISTOR 2SC4672-T100-Q
Q1101	8-729-928-05 s	TRANSISTOR 2SC4617TL-QR
Q1102	8-729-928-91 s	TRANSISTOR DTC114EE-TL
Q1103	8-729-928-91 s	TRANSISTOR DTC114EE-TL
Q1104	8-729-928-37 s	TRANSISTOR DTA114EE-TL
Q1105	6-551-743-01 s	TR SSM6P15FE
Q1106	8-729-928-25 s	TRANSISTOR 2SA1774TL-QR
Q1107	8-729-928-05 s	TRANSISTOR 2SC4617TL-QR
Q1108	6-550-980-01 s	TR RN1904
Q1109	8-729-928-25 s	TRANSISTOR 2SA1774TL-QR
Q1110	8-729-928-05 s	TRANSISTOR 2SC4617TL-QR
Q1111	6-551-743-01 s	TR SSM6P15FE
Q1112	6-551-041-01 s	TR RN4904
Q1113	8-729-231-96 s	TRANSISTOR 2SK880GR-TE85L
Q1114	8-729-231-96 s	TRANSISTOR 2SK880GR-TE85L
Q1115	8-729-231-96 s	TRANSISTOR 2SK880GR-TE85L
Q1116	6-551-041-01 s	TR RN4904
Q1117	8-729-231-96 s	TRANSISTOR 2SK880GR-TE85L
Q1118	6-551-041-01 s	TR RN4904
Q1120	8-729-928-05 s	TRANSISTOR 2SC4617TL-QR
Q1121	8-729-231-96 s	TRANSISTOR 2SK880GR-TE85L
Q1123	8-729-928-05 s	TRANSISTOR 2SC4617TL-QR
Q1124	8-729-928-05 s	TRANSISTOR 2SC4617TL-QR
Q1200	8-729-928-37 s	TRANSISTOR DTA114EE-TL
Q1201	8-729-928-37 s	TRANSISTOR DTA114EE-TL
Q1202	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q1203	8-729-928-25 s	TRANSISTOR 2SA1774TL-QR
Q1204	8-729-928-05 s	TRANSISTOR 2SC4617TL-QR

SY-427 BOARD

Ref. No. or Q'ty	Part No.	SP Description
Q1205	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q1206	8-729-928-05 s	TRANSISTOR 2SC4617TL-QR
Q1300	8-729-231-96 s	TRANSISTOR 2SK880GR-TE85L
Q1301	8-729-231-96 s	TRANSISTOR 2SK880GR-TE85L
Q1302	8-729-928-37 s	TRANSISTOR DTA114EE-TL
Q1303	6-550-980-01 s	TR RN1904
Q1304	6-551-743-01 s	TR SSM6P15FE
Q1305	6-551-743-01 s	TR SSM6P15FE
Q1306	6-551-041-01 s	TR RN4904
Q1307	6-551-041-01 s	TR RN4904
Q1308	6-551-743-01 s	TR SSM6P15FE
Q1309	6-551-743-01 s	TR SSM6P15FE
Q1310	6-551-041-01 s	TR RN4904
Q1311	6-551-041-01 s	TR RN4904
Q1312	8-729-013-37 s	TRANSISTOR 2SC4213-AB-TE85L
Q1313	8-729-013-37 s	TRANSISTOR 2SC4213-AB-TE85L
Q1400	8-729-928-91 s	TRANSISTOR DTC114EE-TL
Q1401	8-729-928-25 s	TRANSISTOR 2SA1774TL-QR
Q1402	8-729-928-05 s	TRANSISTOR 2SC4617TL-QR
Q1403	8-729-013-37 s	TRANSISTOR 2SC4213-AB-TE85L
Q1404	8-729-928-91 s	TRANSISTOR DTC114EE-TL
Q1406	8-729-928-05 s	TRANSISTOR 2SC4617TL-QR
Q1408	8-729-928-05 s	TRANSISTOR 2SC4617TL-QR
Q1409	8-729-928-05 s	TRANSISTOR 2SC4617TL-QR
Q1410	6-551-041-01 s	TR RN4904
Q1411	8-729-928-25 s	TRANSISTOR 2SA1774TL-QR
Q1412	6-551-041-01 s	TR RN4904
Q1413	6-551-041-01 s	TR RN4904
Q1414	8-729-928-25 s	TRANSISTOR 2SA1774TL-QR
Q1415	8-729-231-96 s	TRANSISTOR 2SK880GR-TE85L
Q1416	8-729-231-96 s	TRANSISTOR 2SK880GR-TE85L
Q1417	8-729-013-37 s	TRANSISTOR 2SC4213-AB-TE85L
Q1418	8-729-013-37 s	TRANSISTOR 2SC4213-AB-TE85L
Q1419	6-550-632-01 s	TRANSISTOR 2SC4672-T100-Q
Q1420	8-729-928-05 s	TRANSISTOR 2SC4617TL-QR
Q1421	8-729-928-05 s	TRANSISTOR 2SC4617TL-QR
Q1422	6-551-041-01 s	TR RN4904
Q1423	8-729-231-96 s	TRANSISTOR 2SK880GR-TE85L
R100	1-208-911-81 s	RES, CHIP 10K (1005)
R101	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R102	1-208-887-81 s	RES, CHIP 1.0K (1005)
R103	1-208-887-81 s	RES, CHIP 1.0K (1005)
R104	1-208-887-81 s	RES, CHIP 1.0K (1005)
R105	1-208-887-81 s	RES, CHIP 1.0K (1005)
R106	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R109	1-208-935-81 s	RES, CHIP 100K (1005)
R110	1-208-935-81 s	RES, CHIP 100K (1005)
R111	1-208-911-81 s	RES, CHIP 10K (1005)
R112	1-208-911-81 s	RES, CHIP 10K (1005)
R113	1-208-911-81 s	RES, CHIP 10K (1005)
R200	1-208-887-81 s	RES, CHIP 1.0K (1005)
R201	1-208-935-81 s	RES, CHIP 100K (1005)
R202	1-208-887-81 s	RES, CHIP 1.0K (1005)
R203	1-208-911-81 s	RES, CHIP 10K (1005)
R204	1-208-927-81 s	RES, CHIP 47K (1005)
R205	1-208-927-81 s	RES, CHIP 47K (1005)
R206	1-208-911-81 s	RES, CHIP 10K (1005)
R207	1-208-927-81 s	RES, CHIP 47K (1005)
R208	1-208-927-81 s	RES, CHIP 47K (1005)
R209	1-208-923-81 s	RES, CHIP 33K (1005)
R210	1-220-870-81 s	RES, CHIP 10 (1005)
R211	1-208-911-81 s	RES, CHIP 10K (1005)
R213	1-208-871-81 s	RES, CHIP 220 (1005)
R215	1-208-871-81 s	RES, CHIP 220 (1005)
R217	1-208-935-81 s	RES, CHIP 100K (1005)

SY-427 BOARD

Ref. No. or Q'ty	Part No.	SP Description
R218	1-208-943-81 s	RES, CHIP 220K (1005)
R219	1-208-871-81 s	RES, CHIP 220 (1005)
R222	1-208-871-81 s	RES, CHIP 220 (1005)
R223	1-220-870-81 s	RES, CHIP 10 (1005)
R225	1-208-871-81 s	RES, CHIP 220 (1005)
R226	1-208-911-81 s	RES, CHIP 10K (1005)
R227	1-208-911-81 s	RES, CHIP 10K (1005)
R228	1-208-919-81 s	RES, CHIP 22K (1005)
R229	1-208-911-81 s	RES, CHIP 10K (1005)
R230	1-208-911-81 s	RES, CHIP 10K (1005)
R231	1-208-891-81 s	RES, CHIP 1.5K (1005)
R232	1-208-903-81 s	RES, CHIP 4.7K (1005)
R233	1-208-883-81 s	RES, CHIP 680 (1005)
R234	1-208-935-81 s	RES, CHIP 100K (1005)
R235	1-208-935-81 s	RES, CHIP 100K (1005)
R236	1-208-919-81 s	RES, CHIP 22K (1005)
R237	1-208-935-81 s	RES, CHIP 100K (1005)
R238	1-208-919-81 s	RES, CHIP 22K (1005)
R239	1-220-878-81 s	RES, CHIP 22 (1005)
R240	1-208-927-81 s	RES, CHIP 47K (1005)
R241	1-208-927-81 s	RES, CHIP 47K (1005)
R242	1-208-911-81 s	RES, CHIP 10K (1005)
R243	1-208-911-81 s	RES, CHIP 10K (1005)
R244	1-208-903-81 s	RES, CHIP 4.7K (1005)
R248	1-208-927-81 s	RES, CHIP 47K (1005)
R249	1-208-923-81 s	RES, CHIP 33K (1005)
R250	1-208-911-81 s	RES, CHIP 10K (1005)
R252	1-208-935-81 s	RES, CHIP 100K (1005)
R253	1-208-943-81 s	RES, CHIP 220K (1005)
R254	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R255	1-208-927-81 s	RES, CHIP 47K (1005)
R256	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R257	1-208-935-81 s	RES, CHIP 100K (1005)
R258	1-208-915-81 s	RES, CHIP 15K (1005)
R259	1-208-911-81 s	RES, CHIP 10K (1005)
R260	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R261	1-208-927-81 s	RES, CHIP 47K (1005)
R263	1-208-927-81 s	RES, CHIP 47K (1005)
R264	1-208-903-81 s	RES, CHIP 4.7K (1005)
R265	1-208-887-81 s	RES, CHIP 1.0K (1005)
R266	1-208-943-81 s	RES, CHIP 220K (1005)
R267	1-208-911-81 s	RES, CHIP 10K (1005)
R268	1-208-895-81 s	RES, CHIP 2.2K (1005)
R269	1-208-911-81 s	RES, CHIP 10K (1005)
R270	1-208-943-81 s	RES, CHIP 220K (1005)
R271	1-208-919-81 s	RES, CHIP 22K (1005)
R272	1-208-911-81 s	RES, CHIP 10K (1005)
R273	1-208-887-81 s	RES, CHIP 1.0K (1005)
R274	1-218-859-91 s	RES, CHIP 3.3K (1608)
R275	1-218-859-91 s	RES, CHIP 3.3K (1608)
R276	1-208-927-81 s	RES, CHIP 47K (1005)
R277	1-208-911-81 s	RES, CHIP 10K (1005)
R278	1-208-911-81 s	RES, CHIP 10K (1005)
R279	1-220-870-81 s	RES, CHIP 10 (1005)
R280	1-208-887-81 s	RES, CHIP 1.0K (1005)
R281	1-208-935-81 s	RES, CHIP 100K (1005)
R282	1-208-911-81 s	RES, CHIP 10K (1005)
R283	1-208-911-81 s	RES, CHIP 10K (1005)
R300	1-208-863-81 s	RES, CHIP 100 (1005)
R301	1-208-863-81 s	RES, CHIP 100 (1005)
R302	1-208-887-81 s	RES, CHIP 1.0K (1005)
R303	1-208-911-81 s	RES, CHIP 10K (1005)
R304	1-208-911-81 s	RES, CHIP 10K (1005)
R305	1-208-911-81 s	RES, CHIP 10K (1005)
R306	1-208-911-81 s	RES, CHIP 10K (1005)

SY-427 BOARD

Ref. No. or Q'ty	Part No.	SP Description
R308	1-208-911-81 s	RES, CHIP 10K (1005)
R309	1-208-911-81 s	RES, CHIP 10K (1005)
R310	1-208-911-81 s	RES, CHIP 10K (1005)
R311	1-208-911-81 s	RES, CHIP 10K (1005)
R312	1-208-911-81 s	RES, CHIP 10K (1005)
R317	1-208-911-81 s	RES, CHIP 10K (1005)
R318	1-208-911-81 s	RES, CHIP 10K (1005)
R319	1-208-911-81 s	RES, CHIP 10K (1005)
R320	1-208-911-81 s	RES, CHIP 10K (1005)
R321	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R322	1-208-879-81 s	RES, CHIP 470 (1005)
R323	1-208-911-81 s	RES, CHIP 10K (1005)
R324	1-208-899-81 s	RES, CHIP 3.3K (1005)
R325	1-208-899-81 s	RES, CHIP 3.3K (1005)
R326	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R328	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R329	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R330	1-208-911-81 s	RES, CHIP 10K (1005)
R331	1-208-911-81 s	RES, CHIP 10K (1005)
R332	1-208-911-81 s	RES, CHIP 10K (1005)
R333	1-208-911-81 s	RES, CHIP 10K (1005)
R334	1-208-911-81 s	RES, CHIP 10K (1005)
R336	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R337	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R339	1-208-943-81 s	RES, CHIP 220K (1005)
R341	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R343	1-208-887-81 s	RES, CHIP 1.0K (1005)
R344	1-208-911-81 s	RES, CHIP 10K (1005)
R345	1-208-887-81 s	RES, CHIP 1.0K (1005)
R347	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R348	1-208-911-81 s	RES, CHIP 10K (1005)
R350	1-208-911-81 s	RES, CHIP 10K (1005)
R351	1-208-911-81 s	RES, CHIP 10K (1005)
R352	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R354	1-208-863-81 s	RES, CHIP 100 (1005)
R355	1-208-863-81 s	RES, CHIP 100 (1005)
R356	1-208-863-81 s	RES, CHIP 100 (1005)
R357	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R358	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R360	1-208-911-81 s	RES, CHIP 10K (1005)
R361	1-208-911-81 s	RES, CHIP 10K (1005)
R362	1-208-911-81 s	RES, CHIP 10K (1005)
R363	1-208-887-81 s	RES, CHIP 1.0K (1005)
R364	1-208-887-81 s	RES, CHIP 1.0K (1005)
R365	1-208-903-81 s	RES, CHIP 4.7K (1005)
R400	1-208-871-81 s	RES, CHIP 220 (1005)
R401	1-208-863-81 s	RES, CHIP 100 (1005)
R403	1-208-887-81 s	RES, CHIP 1.0K (1005)
R404	1-208-871-81 s	RES, CHIP 220 (1005)
R405	1-208-863-81 s	RES, CHIP 100 (1005)
R406	1-208-887-81 s	RES, CHIP 1.0K (1005)
R407	1-208-911-81 s	RES, CHIP 10K (1005)
R409	1-208-927-81 s	RES, CHIP 47K (1005)
R410	1-208-903-81 s	RES, CHIP 4.7K (1005)
R411	1-208-927-81 s	RES, CHIP 47K (1005)
R412	1-208-903-81 s	RES, CHIP 4.7K (1005)
R413	1-208-887-81 s	RES, CHIP 1.0K (1005)
R414	1-208-911-81 s	RES, CHIP 10K (1005)
R415	1-208-899-81 s	RES, CHIP 3.3K (1005)
R420	1-208-911-81 s	RES, CHIP 10K (1005)
R421	1-208-871-81 s	RES, CHIP 220 (1005)
R425	1-208-895-81 s	RES, CHIP 2.2K (1005)
R429	1-208-899-81 s	RES, CHIP 3.3K (1005)
R435	1-208-863-81 s	RES, CHIP 100 (1005)
R436	1-208-863-81 s	RES, CHIP 100 (1005)

SY-427 BOARD

Ref. No. or Q'ty	Part No.	SP Description
R437	1-208-911-81 s	RES, CHIP 10K (1005)
R438	1-208-891-81 s	RES, CHIP 1.5K (1005)
R439	1-208-911-81 s	RES, CHIP 10K (1005)
R440	1-208-891-81 s	RES, CHIP 1.5K (1005)
R441	1-208-863-81 s	RES, CHIP 100 (1005)
R442	1-208-863-81 s	RES, CHIP 100 (1005)
R443	1-208-863-81 s	RES, CHIP 100 (1005)
R444	1-208-863-81 s	RES, CHIP 100 (1005)
R456	1-208-891-81 s	RES, CHIP 1.5K (1005)
R459	1-208-891-81 s	RES, CHIP 1.5K (1005)
R462	1-208-903-81 s	RES, CHIP 4.7K (1005)
R463	1-208-903-81 s	RES, CHIP 4.7K (1005)
R464	1-208-863-81 s	RES, CHIP 100 (1005)
R465	1-208-863-81 s	RES, CHIP 100 (1005)
R466	1-208-903-81 s	RES, CHIP 4.7K (1005)
R467	1-208-903-81 s	RES, CHIP 4.7K (1005)
R470	1-208-863-81 s	RES, CHIP 100 (1005)
R471	1-208-863-81 s	RES, CHIP 100 (1005)
R472	1-208-863-81 s	RES, CHIP 100 (1005)
R473	1-208-863-81 s	RES, CHIP 100 (1005)
R478	1-218-933-81 s	RES, CHIP 22 (1005)
R481	1-208-891-81 s	RES, CHIP 1.5K (1005)
R483	1-208-911-81 s	RES, CHIP 10K (1005)
R484	1-208-903-81 s	RES, CHIP 4.7K (1005)
R485	1-208-863-81 s	RES, CHIP 100 (1005)
R500	1-208-927-81 s	RES, CHIP 47K (1005)
R501	1-208-927-81 s	RES, CHIP 47K (1005)
R502	1-208-863-81 s	RES, CHIP 100 (1005)
R503	1-208-903-81 s	RES, CHIP 4.7K (1005)
R504	1-220-878-81 s	RES, CHIP 22 (1005)
R507	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R510	1-208-911-81 s	RES, CHIP 10K (1005)
R511	1-208-911-81 s	RES, CHIP 10K (1005)
R512	1-220-878-81 s	RES, CHIP 22 (1005)
R513	1-220-878-81 s	RES, CHIP 22 (1005)
R514	1-208-895-81 s	RES, CHIP 2.2K (1005)
R515	1-208-895-81 s	RES, CHIP 2.2K (1005)
R516	1-208-863-81 s	RES, CHIP 100 (1005)
R517	1-208-863-81 s	RES, CHIP 100 (1005)
R518	1-208-863-81 s	RES, CHIP 100 (1005)
R519	1-208-863-81 s	RES, CHIP 100 (1005)
R520	1-220-878-81 s	RES, CHIP 22 (1005)
R521	1-208-863-81 s	RES, CHIP 100 (1005)
R522	1-220-878-81 s	RES, CHIP 22 (1005)
R523	1-208-903-81 s	RES, CHIP 4.7K (1005)
R524	1-208-903-81 s	RES, CHIP 4.7K (1005)
R529	1-208-863-81 s	RES, CHIP 100 (1005)
R530	1-208-863-81 s	RES, CHIP 100 (1005)
R531	1-208-863-81 s	RES, CHIP 100 (1005)
R532	1-208-903-81 s	RES, CHIP 4.7K (1005)
R533	1-208-903-81 s	RES, CHIP 4.7K (1005)
R534	1-208-863-81 s	RES, CHIP 100 (1005)
R535	1-208-863-81 s	RES, CHIP 100 (1005)
R536	1-208-863-81 s	RES, CHIP 100 (1005)
R537	1-220-878-81 s	RES, CHIP 22 (1005)
R538	1-208-863-81 s	RES, CHIP 100 (1005)
R539	1-220-878-81 s	RES, CHIP 22 (1005)
R540	1-208-863-81 s	RES, CHIP 100 (1005)
R541	1-220-878-81 s	RES, CHIP 22 (1005)
R542	1-208-863-81 s	RES, CHIP 100 (1005)
R543	1-220-878-81 s	RES, CHIP 22 (1005)
R544	1-220-878-81 s	RES, CHIP 22 (1005)
R545	1-220-878-81 s	RES, CHIP 22 (1005)
R546	1-208-911-81 s	RES, CHIP 10K (1005)
R547	1-208-911-81 s	RES, CHIP 10K (1005)

SY-427 BOARD

Ref. No. or Q'ty	Part No.	SP Description
R548	1-208-875-81 s	RES, CHIP 330 (1005)
R549	1-208-871-81 s	RES, CHIP 220 (1005)
R550	1-208-911-81 s	RES, CHIP 10K (1005)
R551	1-208-911-81 s	RES, CHIP 10K (1005)
R556	1-208-863-81 s	RES, CHIP 100 (1005)
R557	1-208-863-81 s	RES, CHIP 100 (1005)
R558	1-220-882-81 s	RES, CHIP 33 (1005)
R559	1-208-863-81 s	RES, CHIP 100 (1005)
R600	1-208-935-81 s	RES, CHIP 100K (1005)
R601	1-208-935-81 s	RES, CHIP 100K (1005)
R602	1-208-939-81 s	RES, CHIP 150K (1005)
R603	1-208-931-81 s	RES, CHIP 68K (1005)
R605	1-208-927-81 s	RES, CHIP 47K (1005)
R606	1-208-915-81 s	RES, CHIP 15K (1005)
R607	1-208-915-81 s	RES, CHIP 15K (1005)
R608	1-208-927-81 s	RES, CHIP 47K (1005)
R609	1-208-927-81 s	RES, CHIP 47K (1005)
R610	1-208-919-81 s	RES, CHIP 22K (1005)
R611	1-208-911-81 s	RES, CHIP 10K (1005)
R612	1-208-887-81 s	RES, CHIP 1.0K (1005)
R613	1-208-887-81 s	RES, CHIP 1.0K (1005)
R614	1-208-923-81 s	RES, CHIP 33K (1005)
R615	1-208-935-81 s	RES, CHIP 100K (1005)
R616	1-208-923-81 s	RES, CHIP 33K (1005)
R617	1-208-911-81 s	RES, CHIP 10K (1005)
R618	1-208-907-81 s	RES, CHIP 6.8K (1005)
R619	1-208-927-81 s	RES, CHIP 47K (1005)
R620	1-208-895-81 s	RES, CHIP 2.2K (1005)
R621	1-208-903-81 s	RES, CHIP 4.7K (1005)
R622	1-208-915-81 s	RES, CHIP 15K (1005)
R623	1-208-871-81 s	RES, CHIP 220 (1005)
R624	1-208-871-81 s	RES, CHIP 220 (1005)
R625	1-208-919-81 s	RES, CHIP 22K (1005)
R626	1-208-871-81 s	RES, CHIP 220 (1005)
R627	1-208-871-81 s	RES, CHIP 220 (1005)
R628	1-208-923-81 s	RES, CHIP 33K (1005)
R629	1-208-931-81 s	RES, CHIP 68K (1005)
R630	1-208-927-81 s	RES, CHIP 47K (1005)
R631	1-208-919-81 s	RES, CHIP 22K (1005)
R632	1-208-911-81 s	RES, CHIP 10K (1005)
R636	1-208-923-81 s	RES, CHIP 33K (1005)
R637	1-208-911-81 s	RES, CHIP 10K (1005)
R641	1-208-903-81 s	RES, CHIP 4.7K (1005)
R642	1-208-871-81 s	RES, CHIP 220 (1005)
R643	1-208-911-81 s	RES, CHIP 10K (1005)
R644	1-208-927-81 s	RES, CHIP 47K (1005)
R645	1-208-907-81 s	RES, CHIP 6.8K (1005)
R646	1-208-935-81 s	RES, CHIP 100K (1005)
R647	1-208-935-81 s	RES, CHIP 100K (1005)
R648	1-208-923-81 s	RES, CHIP 33K (1005)
R650	1-208-935-81 s	RES, CHIP 100K (1005)
R651	1-208-935-81 s	RES, CHIP 100K (1005)
R652	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R653	1-208-863-81 s	RES, CHIP 100 (1005)
R654	1-208-863-81 s	RES, CHIP 100 (1005)
R660	1-208-855-81 s	RES, CHIP 47 (1005)
R666	1-208-943-81 s	RES, CHIP 220K (1005)
R668	1-208-871-81 s	RES, CHIP 220 (1005)
R672	1-220-878-81 s	RES, CHIP 22 (1005)
R673	1-208-911-81 s	RES, CHIP 10K (1005)
R704	1-208-887-81 s	RES, CHIP 1.0K (1005)
R705	1-208-923-81 s	RES, CHIP 33K (1005)
R706	1-208-871-81 s	RES, CHIP 220 (1005)
R707	1-208-919-81 s	RES, CHIP 22K (1005)
R708	1-208-919-81 s	RES, CHIP 22K (1005)

SY-427 BOARD

Ref. No. or Q'ty	Part No.	SP Description
R709	1-220-870-81 s	RES, CHIP 10 (1005)
R710	1-220-870-81 s	RES, CHIP 10 (1005)
R711	1-208-927-81 s	RES, CHIP 47K (1005)
R712	1-208-863-81 s	RES, CHIP 100 (1005)
R713	1-208-863-81 s	RES, CHIP 100 (1005)
R714	1-208-887-81 s	RES, CHIP 1.0K (1005)
R715	1-208-863-81 s	RES, CHIP 100 (1005)
R716	1-218-989-81 s	RES, CHIP 1M (1005)
R717	1-220-878-81 s	RES, CHIP 22 (1005)
R718	1-220-878-81 s	RES, CHIP 22 (1005)
R719	1-218-933-81 s	RES, CHIP 22 (1005)
R720	1-208-855-81 s	RES, CHIP 47 (1005)
R721	1-208-855-81 s	RES, CHIP 47 (1005)
R722	1-208-855-81 s	RES, CHIP 47 (1005)
R723	1-208-855-81 s	RES, CHIP 47 (1005)
R724	1-220-878-81 s	RES, CHIP 22 (1005)
R725	1-208-855-81 s	RES, CHIP 47 (1005)
R726	1-208-855-81 s	RES, CHIP 47 (1005)
R727	1-208-863-81 s	RES, CHIP 100 (1005)
R728	1-208-863-81 s	RES, CHIP 100 (1005)
R729	1-220-878-81 s	RES, CHIP 22 (1005)
R730	1-208-919-81 s	RES, CHIP 22K (1005)
R800	1-220-878-81 s	RES, CHIP 22 (1005)
R801	1-220-878-81 s	RES, CHIP 22 (1005)
R803	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R804	1-208-935-81 s	RES, CHIP 100K (1005)
R806	1-208-863-81 s	RES, CHIP 100 (1005)
R807	1-208-863-81 s	RES, CHIP 100 (1005)
R812	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R813	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R814	1-208-855-81 s	RES, CHIP 47 (1005)
R815	1-208-855-81 s	RES, CHIP 47 (1005)
R816	1-220-878-81 s	RES, CHIP 22 (1005)
R817	1-220-878-81 s	RES, CHIP 22 (1005)
R900	1-208-911-81 s	RES, CHIP 10K (1005)
R901	1-208-911-81 s	RES, CHIP 10K (1005)
R902	1-208-911-81 s	RES, CHIP 10K (1005)
R908	1-208-895-81 s	RES, CHIP 2.2K (1005)
R909	1-208-911-81 s	RES, CHIP 10K (1005)
R911	1-208-911-81 s	RES, CHIP 10K (1005)
R912	1-208-911-81 s	RES, CHIP 10K (1005)
R913	1-208-911-81 s	RES, CHIP 10K (1005)
R914	1-208-911-81 s	RES, CHIP 10K (1005)
R916	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R917	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R920	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R922	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R1000	1-208-863-81 s	RES, CHIP 100 (1005)
R1001	1-208-863-81 s	RES, CHIP 100 (1005)
R1002	1-208-863-81 s	RES, CHIP 100 (1005)
R1003	1-208-863-81 s	RES, CHIP 100 (1005)
R1004	1-208-899-81 s	RES, CHIP 3.3K (1005)
R1005	1-208-883-81 s	RES, CHIP 680 (1005)
R1009	1-208-903-81 s	RES, CHIP 4.7K (1005)
R1010	1-208-903-81 s	RES, CHIP 4.7K (1005)
R1011	1-208-903-81 s	RES, CHIP 4.7K (1005)
R1012	1-208-887-81 s	RES, CHIP 1.0K (1005)
R1013	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R1014	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R1015	1-208-887-81 s	RES, CHIP 1.0K (1005)
R1016	1-208-879-81 s	RES, CHIP 470 (1005)
R1017	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R1019	1-208-891-81 s	RES, CHIP 1.5K (1005)
R1022	1-208-863-81 s	RES, CHIP 100 (1005)
R1026	1-208-875-81 s	RES, CHIP 330 (1005)

SY-427 BOARD

Ref. No. or Q'ty	Part No.	SP Description
R1027	1-208-875-81 s	RES, CHIP 330 (1005)
R1028	1-208-875-81 s	RES, CHIP 330 (1005)
R1029	1-208-867-81 s	RES, CHIP 150 (1005)
R1030	1-208-867-81 s	RES, CHIP 150 (1005)
R1031	1-208-859-81 s	RES, CHIP 68 (1005)
R1032	1-220-870-81 s	RES, CHIP 10 (1005)
R1033	1-208-887-81 s	RES, CHIP 1.0K (1005)
R1034	1-208-887-81 s	RES, CHIP 1.0K (1005)
R1035	1-220-870-81 s	RES, CHIP 10 (1005)
R1036	1-208-887-81 s	RES, CHIP 1.0K (1005)
R1037	1-208-887-81 s	RES, CHIP 1.0K (1005)
R1038	1-208-887-81 s	RES, CHIP 1.0K (1005)
R1039	1-208-887-81 s	RES, CHIP 1.0K (1005)
R1040	1-208-863-81 s	RES, CHIP 100 (1005)
R1041	1-208-863-81 s	RES, CHIP 100 (1005)
R1042	1-208-863-81 s	RES, CHIP 100 (1005)
R1043	1-208-867-81 s	RES, CHIP 150 (1005)
R1044	1-208-867-81 s	RES, CHIP 150 (1005)
R1045	1-208-867-81 s	RES, CHIP 150 (1005)
R1046	1-208-867-81 s	RES, CHIP 150 (1005)
R1047	1-208-867-81 s	RES, CHIP 150 (1005)
R1048	1-208-867-81 s	RES, CHIP 150 (1005)
R1049	1-216-864-91 s	CONDUCTOR, CHIP (1608)
R1050	1-216-864-91 s	CONDUCTOR, CHIP (1608)
R1102	1-208-903-81 s	RES, CHIP 4.7K (1005)
R1103	1-208-871-81 s	RES, CHIP 220 (1005)
R1104	1-208-871-81 s	RES, CHIP 220 (1005)
R1105	1-208-887-81 s	RES, CHIP 1.0K (1005)
R1107	1-208-887-81 s	RES, CHIP 1.0K (1005)
R1108	1-208-895-81 s	RES, CHIP 2.2K (1005)
R1109	1-208-911-81 s	RES, CHIP 10K (1005)
R1110	1-208-887-81 s	RES, CHIP 1.0K (1005)
R1112	1-208-959-81 s	RES, CHIP 1M (1005)
R1113	1-208-911-81 s	RES, CHIP 10K (1005)
R1114	1-208-927-81 s	RES, CHIP 47K (1005)
R1115	1-208-927-81 s	RES, CHIP 47K (1005)
R1116	1-208-915-81 s	RES, CHIP 15K (1005)
R1117	1-208-911-81 s	RES, CHIP 10K (1005)
R1118	1-208-911-81 s	RES, CHIP 10K (1005)
R1119	1-208-911-81 s	RES, CHIP 10K (1005)
R1120	1-208-919-81 s	RES, CHIP 22K (1005)
R1121	1-218-871-91 s	RES, CHIP 10K (1608)
R1122	1-208-911-81 s	RES, CHIP 10K (1005)
R1123	1-208-959-81 s	RES, CHIP 1M (1005)
R1124	1-216-837-91 s	RES, CHIP 22K (1608)
R1125	1-216-837-91 s	RES, CHIP 22K (1608)
R1126	1-218-871-91 s	RES, CHIP 10K (1608)
R1127	1-208-943-81 s	RES, CHIP 220K (1005)
R1128	1-208-915-81 s	RES, CHIP 15K (1005)
R1129	1-220-882-81 s	RES, CHIP 33 (1005)
R1130	1-218-827-91 s	RES, CHIP 150 (1608)
R1131	1-220-882-81 s	RES, CHIP 33 (1005)
R1132	1-218-827-91 s	RES, CHIP 150 (1608)
R1133	1-208-887-81 s	RES, CHIP 1.0K (1005)
R1134	1-208-887-81 s	RES, CHIP 1.0K (1005)
R1135	1-208-927-81 s	RES, CHIP 47K (1005)
R1136	1-208-927-81 s	RES, CHIP 47K (1005)
R1139	1-218-989-81 s	RES, CHIP 1M (1005)
R1140	1-218-989-81 s	RES, CHIP 1M (1005)
R1141	1-208-907-81 s	RES, CHIP 6.8K (1005)
R1142	1-218-989-81 s	RES, CHIP 1M (1005)
R1143	1-208-907-81 s	RES, CHIP 6.8K (1005)
R1144	1-218-989-81 s	RES, CHIP 1M (1005)
R1145	1-208-903-81 s	RES, CHIP 4.7K (1005)
R1146	1-208-903-81 s	RES, CHIP 4.7K (1005)

SY-427 BOARD

Ref. No. or Q'ty	Part No.	SP Description
R1148	1-208-887-81 s	RES, CHIP 1.0K (1005)
R1149	1-208-855-81 s	RES, CHIP 47 (1005)
R1150	1-208-887-81 s	RES, CHIP 1.0K (1005)
R1151	1-208-887-81 s	RES, CHIP 1.0K (1005)
R1152	1-208-887-81 s	RES, CHIP 1.0K (1005)
R1153	1-220-870-81 s	RES, CHIP 10 (1005)
R1154	1-208-919-81 s	RES, CHIP 22K (1005)
R1155	1-208-899-81 s	RES, CHIP 3.3K (1005)
R1156	1-208-879-81 s	RES, CHIP 470 (1005)
R1157	1-218-989-81 s	RES, CHIP 1M (1005)
R1158	1-220-870-81 s	RES, CHIP 10 (1005)
R1159	1-208-863-81 s	RES, CHIP 100 (1005)
R1160	1-208-895-81 s	RES, CHIP 2.2K (1005)
R1161	1-208-903-81 s	RES, CHIP 4.7K (1005)
R1162	1-208-911-81 s	RES, CHIP 10K (1005)
R1163	1-220-870-81 s	RES, CHIP 10 (1005)
R1164	1-208-879-81 s	RES, CHIP 470 (1005)
R1165	1-208-887-81 s	RES, CHIP 1.0K (1005)
R1166	1-208-911-81 s	RES, CHIP 10K (1005)
R1167	1-220-870-81 s	RES, CHIP 10 (1005)
R1168	1-208-899-81 s	RES, CHIP 3.3K (1005)
R1169	1-208-879-81 s	RES, CHIP 470 (1005)
R1170	1-208-855-81 s	RES, CHIP 47 (1005)
R1171	1-220-870-81 s	RES, CHIP 10 (1005)
R1172	1-220-870-81 s	RES, CHIP 10 (1005)
R1173	1-208-911-81 s	RES, CHIP 10K (1005)
R1174	1-208-879-81 s	RES, CHIP 470 (1005)
R1175	1-208-919-81 s	RES, CHIP 22K (1005)
R1176	1-220-870-81 s	RES, CHIP 10 (1005)
R1177	1-208-879-81 s	RES, CHIP 470 (1005)
R1178	1-208-935-81 s	RES, CHIP 100K (1005)
R1179	1-208-935-81 s	RES, CHIP 100K (1005)
R1180	1-220-870-81 s	RES, CHIP 10 (1005)
R1200	1-208-863-81 s	RES, CHIP 100 (1005)
R1201	1-208-863-81 s	RES, CHIP 100 (1005)
R1203	1-208-863-81 s	RES, CHIP 100 (1005)
R1204	1-208-863-81 s	RES, CHIP 100 (1005)
R1207	1-208-915-81 s	RES, CHIP 15K (1005)
R1208	1-208-915-81 s	RES, CHIP 15K (1005)
R1210	1-208-915-81 s	RES, CHIP 15K (1005)
R1211	1-208-915-81 s	RES, CHIP 15K (1005)
R1212	1-208-935-81 s	RES, CHIP 100K (1005)
R1213	1-208-935-81 s	RES, CHIP 100K (1005)
R1214	1-208-911-81 s	RES, CHIP 10K (1005)
R1215	1-208-911-81 s	RES, CHIP 10K (1005)
R1216	1-208-903-81 s	RES, CHIP 4.7K (1005)
R1217	1-208-899-81 s	RES, CHIP 3.3K (1005)
R1218	1-208-887-81 s	RES, CHIP 1.0K (1005)
R1219	1-208-883-81 s	RES, CHIP 680 (1005)
R1220	1-208-915-81 s	RES, CHIP 15K (1005)
R1221	1-208-887-81 s	RES, CHIP 1.0K (1005)
R1222	1-208-903-81 s	RES, CHIP 4.7K (1005)
R1223	1-208-903-81 s	RES, CHIP 4.7K (1005)
R1224	1-208-935-81 s	RES, CHIP 100K (1005)
R1226	1-208-935-81 s	RES, CHIP 100K (1005)
R1227	1-208-903-81 s	RES, CHIP 4.7K (1005)
R1228	1-208-903-81 s	RES, CHIP 4.7K (1005)
R1229	1-208-911-81 s	RES, CHIP 10K (1005)
R1230	1-208-911-81 s	RES, CHIP 10K (1005)
R1231	1-208-911-81 s	RES, CHIP 10K (1005)
R1232	1-208-919-81 s	RES, CHIP 22K (1005)
R1233	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R1234	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R1235	1-208-887-81 s	RES, CHIP 1.0K (1005)
R1236	1-208-887-81 s	RES, CHIP 1.0K (1005)

SY-427 BOARD

Ref. No. or Q'ty	Part No.	SP Description
R1237	1-208-911-81 s	RES, CHIP 10K (1005)
R1238	1-208-927-81 s	RES, CHIP 47K (1005)
R1239	1-208-927-81 s	RES, CHIP 47K (1005)
R1240	1-208-911-81 s	RES, CHIP 10K (1005)
R1241	1-208-935-81 s	RES, CHIP 100K (1005)
R1242	1-208-935-81 s	RES, CHIP 100K (1005)
R1243	1-208-935-81 s	RES, CHIP 100K (1005)
R1244	1-208-935-81 s	RES, CHIP 100K (1005)
R1245	1-218-855-91 s	RES, CHIP 2.2K (1608)
R1246	1-208-883-81 s	RES, CHIP 680 (1005)
R1247	1-208-883-81 s	RES, CHIP 680 (1005)
R1248	1-208-907-81 s	RES, CHIP 6.8K (1005)
R1249	1-208-907-81 s	RES, CHIP 6.8K (1005)
R1250	1-208-887-81 s	RES, CHIP 1.0K (1005)
R1251	1-208-887-81 s	RES, CHIP 1.0K (1005)
R1252	1-208-911-81 s	RES, CHIP 10K (1005)
R1253	1-208-919-81 s	RES, CHIP 22K (1005)
R1254	1-208-919-81 s	RES, CHIP 22K (1005)
R1255	1-208-919-81 s	RES, CHIP 22K (1005)
R1256	1-208-927-81 s	RES, CHIP 47K (1005)
R1257	1-218-839-91 s	RES, CHIP 470 (1608)
R1258	1-208-911-81 s	RES, CHIP 10K (1005)
R1259	1-208-923-81 s	RES, CHIP 33K (1005)
R1260	1-218-847-91 s	RES, CHIP 1.0K (1608)
R1261	1-220-878-81 s	RES, CHIP 22 (1005)
R1262	1-208-943-81 s	RES, CHIP 220K (1005)
R1263	1-208-943-81 s	RES, CHIP 220K (1005)
R1300	1-208-863-81 s	RES, CHIP 100 (1005)
R1301	1-208-863-81 s	RES, CHIP 100 (1005)
R1303	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R1304	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R1305	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R1306	1-208-915-81 s	RES, CHIP 15K (1005)
R1307	1-208-927-81 s	RES, CHIP 47K (1005)
R1308	1-208-927-81 s	RES, CHIP 47K (1005)
R1309	1-208-915-81 s	RES, CHIP 15K (1005)
R1310	1-208-915-81 s	RES, CHIP 15K (1005)
R1311	1-208-915-81 s	RES, CHIP 15K (1005)
R1312	1-208-927-81 s	RES, CHIP 47K (1005)
R1313	1-208-915-81 s	RES, CHIP 15K (1005)
R1314	1-208-915-81 s	RES, CHIP 15K (1005)
R1315	1-220-878-81 s	RES, CHIP 22 (1005)
R1316	1-208-911-81 s	RES, CHIP 10K (1005)
R1317	1-208-903-81 s	RES, CHIP 4.7K (1005)
R1318	1-208-903-81 s	RES, CHIP 4.7K (1005)
R1319	1-208-903-81 s	RES, CHIP 4.7K (1005)
R1320	1-208-903-81 s	RES, CHIP 4.7K (1005)
R1321	1-208-911-81 s	RES, CHIP 10K (1005)
R1322	1-208-899-81 s	RES, CHIP 3.3K (1005)
R1323	1-208-899-81 s	RES, CHIP 3.3K (1005)
R1324	1-208-935-81 s	RES, CHIP 100K (1005)
R1325	1-208-935-81 s	RES, CHIP 100K (1005)
R1326	1-208-891-81 s	RES, CHIP 1.5K (1005)
R1327	1-208-891-81 s	RES, CHIP 1.5K (1005)
R1328	1-208-891-81 s	RES, CHIP 1.5K (1005)
R1329	1-208-891-81 s	RES, CHIP 1.5K (1005)
R1330	1-218-989-81 s	RES, CHIP 1M (1005)
R1331	1-218-989-81 s	RES, CHIP 1M (1005)
R1332	1-208-911-81 s	RES, CHIP 10K (1005)
R1333	1-208-911-81 s	RES, CHIP 10K (1005)
R1334	1-208-911-81 s	RES, CHIP 10K (1005)
R1335	1-208-911-81 s	RES, CHIP 10K (1005)
R1336	1-208-899-81 s	RES, CHIP 3.3K (1005)
R1337	1-208-899-81 s	RES, CHIP 3.3K (1005)
R1338	1-208-895-81 s	RES, CHIP 2.2K (1005)

SY-427 BOARD

Ref. No. or Q'ty	Part No.	SP Description
R1339	1-208-895-81 s	RES, CHIP 2.2K (1005)
R1340	1-208-935-81 s	RES, CHIP 100K (1005)
R1341	1-208-935-81 s	RES, CHIP 100K (1005)
R1342	1-208-915-81 s	RES, CHIP 15K (1005)
R1343	1-208-959-81 s	RES, CHIP 1M (1005)
R1344	1-208-959-81 s	RES, CHIP 1M (1005)
R1345	1-208-915-81 s	RES, CHIP 15K (1005)
R1346	1-208-927-81 s	RES, CHIP 47K (1005)
R1347	1-208-927-81 s	RES, CHIP 47K (1005)
R1348	1-208-907-81 s	RES, CHIP 6.8K (1005)
R1349	1-208-907-81 s	RES, CHIP 6.8K (1005)
R1350	1-208-895-81 s	RES, CHIP 2.2K (1005)
R1351	1-208-895-81 s	RES, CHIP 2.2K (1005)
R1352	1-208-935-81 s	RES, CHIP 100K (1005)
R1353	1-208-935-81 s	RES, CHIP 100K (1005)
R1354	1-208-935-81 s	RES, CHIP 100K (1005)
R1355	1-208-887-81 s	RES, CHIP 1.0K (1005)
R1356	1-208-887-81 s	RES, CHIP 1.0K (1005)
R1357	1-208-935-81 s	RES, CHIP 100K (1005)
R1358	1-208-915-81 s	RES, CHIP 15K (1005)
R1359	1-208-935-81 s	RES, CHIP 100K (1005)
R1360	1-208-935-81 s	RES, CHIP 100K (1005)
R1361	1-208-959-81 s	RES, CHIP 1M (1005)
R1362	1-208-959-81 s	RES, CHIP 1M (1005)
R1363	1-208-915-81 s	RES, CHIP 15K (1005)
R1364	1-208-911-81 s	RES, CHIP 10K (1005)
R1366	1-208-911-81 s	RES, CHIP 10K (1005)
R1368	1-220-870-81 s	RES, CHIP 10 (1005)
R1369	1-220-870-81 s	RES, CHIP 10 (1005)
R1370	1-220-253-91 s	RES, SQUARE TYPE CHIP 47(3225)
R1371	1-220-253-91 s	RES, SQUARE TYPE CHIP 47(3225)
R1372	1-208-903-81 s	RES, CHIP 4.7K (1005)
R1373	1-208-903-81 s	RES, CHIP 4.7K (1005)
R1400	1-208-895-81 s	RES, CHIP 2.2K (1005)
R1401	1-208-943-81 s	RES, CHIP 220K (1005)
R1402	1-208-943-81 s	RES, CHIP 220K (1005)
R1403	1-208-911-81 s	RES, CHIP 10K (1005)
R1404	1-208-911-81 s	RES, CHIP 10K (1005)
R1405	1-208-891-81 s	RES, CHIP 1.5K (1005)
R1406	1-208-887-81 s	RES, CHIP 1.0K (1005)
R1407	1-208-911-81 s	RES, CHIP 10K (1005)
R1408	1-208-879-81 s	RES, CHIP 470 (1005)
R1409	1-208-903-81 s	RES, CHIP 4.7K (1005)
R1410	1-208-887-81 s	RES, CHIP 1.0K (1005)
R1411	1-208-887-81 s	RES, CHIP 1.0K (1005)
R1412	1-208-887-81 s	RES, CHIP 1.0K (1005)
R1413	1-208-887-81 s	RES, CHIP 1.0K (1005)
R1414	1-208-911-81 s	RES, CHIP 10K (1005)
R1415	1-220-870-81 s	RES, CHIP 10 (1005)
R1416	1-208-911-81 s	RES, CHIP 10K (1005)
R1417	1-208-911-81 s	RES, CHIP 10K (1005)
R1418	1-220-870-81 s	RES, CHIP 10 (1005)
R1419	1-208-919-81 s	RES, CHIP 22K (1005)
R1420	1-208-899-81 s	RES, CHIP 3.3K (1005)
R1421	1-208-879-81 s	RES, CHIP 470 (1005)
R1422	1-220-870-81 s	RES, CHIP 10 (1005)
R1423	1-220-870-81 s	RES, CHIP 10 (1005)
R1424	1-208-911-81 s	RES, CHIP 10K (1005)
R1425	1-208-863-81 s	RES, CHIP 100 (1005)
R1426	1-208-895-81 s	RES, CHIP 2.2K (1005)
R1427	1-208-903-81 s	RES, CHIP 4.7K (1005)
R1428	1-208-911-81 s	RES, CHIP 10K (1005)
R1429	1-208-879-81 s	RES, CHIP 470 (1005)
R1430	1-208-887-81 s	RES, CHIP 1.0K (1005)
R1431	1-220-870-81 s	RES, CHIP 10 (1005)

SY-427 BOARD

Ref. No. or Q'ty	Part No.	SP Description
R1432	1-208-899-81 s	RES, CHIP 3.3K (1005)
R1433	1-208-879-81 s	RES, CHIP 470 (1005)
R1434	1-220-870-81 s	RES, CHIP 10 (1005)
R1435	1-220-870-81 s	RES, CHIP 10 (1005)
R1436	1-220-870-81 s	RES, CHIP 10 (1005)
R1437	1-208-911-81 s	RES, CHIP 10K (1005)
R1438	1-208-879-81 s	RES, CHIP 470 (1005)
R1439	1-208-919-81 s	RES, CHIP 22K (1005)
R1440	1-208-879-81 s	RES, CHIP 470 (1005)
R1441	1-220-870-81 s	RES, CHIP 10 (1005)
R1442	1-220-870-81 s	RES, CHIP 10 (1005)
R1443	1-208-943-81 s	RES, CHIP 220K (1005)
R1444	1-208-943-81 s	RES, CHIP 220K (1005)
R1445	1-220-870-81 s	RES, CHIP 10 (1005)
R1446	1-218-989-81 s	RES, CHIP 1M (1005)
R1447	1-208-903-81 s	RES, CHIP 4.7K (1005)
R1448	1-220-870-81 s	RES, CHIP 10 (1005)
R1449	1-208-919-81 s	RES, CHIP 22K (1005)
R1450	1-208-927-81 s	RES, CHIP 47K (1005)
R1451	1-208-919-81 s	RES, CHIP 22K (1005)
R1452	1-208-863-81 s	RES, CHIP 100 (1005)
R1453	1-208-919-81 s	RES, CHIP 22K (1005)
R1454	1-208-887-81 s	RES, CHIP 1.0K (1005)
R1455	1-208-887-81 s	RES, CHIP 1.0K (1005)
R1456	1-208-903-81 s	RES, CHIP 4.7K (1005)
R1457	1-208-927-81 s	RES, CHIP 47K (1005)
R1458	1-208-911-81 s	RES, CHIP 10K (1005)
R1459	1-208-923-81 s	RES, CHIP 33K (1005)
R1460	1-208-927-81 s	RES, CHIP 47K (1005)
R1461	1-208-919-81 s	RES, CHIP 22K (1005)
R1462	1-208-887-81 s	RES, CHIP 1.0K (1005)
R1463	1-208-927-81 s	RES, CHIP 47K (1005)
R1465	1-218-989-81 s	RES, CHIP 1M (1005)
R1466	1-218-989-81 s	RES, CHIP 1M (1005)
R1467	1-208-923-81 s	RES, CHIP 33K (1005)
R1468	1-208-943-81 s	RES, CHIP 220K (1005)
R1469	1-208-943-81 s	RES, CHIP 220K (1005)
R1470	1-208-887-81 s	RES, CHIP 1.0K (1005)
R1471	1-208-903-81 s	RES, CHIP 4.7K (1005)
R1473	1-208-903-81 s	RES, CHIP 4.7K (1005)
R1474	1-208-927-81 s	RES, CHIP 47K (1005)
R1476	1-208-863-81 s	RES, CHIP 100 (1005)
R1478	1-208-911-81 s	RES, CHIP 10K (1005)
R1479	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R1480	1-208-863-81 s	RES, CHIP 100 (1005)
R1481	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R1482	1-208-911-81 s	RES, CHIP 10K (1005)
R1483	1-220-253-91 s	RES, SQUARE TYPE CHIP 47(3225)
R1484	1-218-823-91 s	RES, CHIP 100 (1608)
R1485	1-208-911-81 s	RES, CHIP 10K (1005)
R1486	1-208-911-81 s	RES, CHIP 10K (1005)
R1487	1-208-911-81 s	RES, CHIP 10K (1005)
R1488	1-218-823-91 s	RES, CHIP 100 (1608)
R1489	1-208-911-81 s	RES, CHIP 10K (1005)
R1490	1-218-823-91 s	RES, CHIP 100 (1608)
R1491	1-220-253-91 s	RES, SQUARE TYPE CHIP 47(3225)
R1492	1-208-887-81 s	RES, CHIP 1.0K (1005)
R1493	1-208-903-81 s	RES, CHIP 4.7K (1005)
R1494	1-208-911-81 s	RES, CHIP 10K (1005)
R1495	1-208-923-81 s	RES, CHIP 33K (1005)
R1496	1-208-927-81 s	RES, CHIP 47K (1005)
R1497	1-218-823-91 s	RES, CHIP 100 (1608)
R1498	1-208-895-81 s	RES, CHIP 2.2K (1005)
R1499	1-208-903-81 s	RES, CHIP 4.7K (1005)
R1500	1-216-833-91 s	RES, CHIP 10K (1608)

SY-427 BOARD

Ref. No. or Q'ty	Part No.	SP Description
R1501	1-216-833-91 s	RES, CHIP 10K (1608)
R1502	1-208-911-81 s	RES, CHIP 10K (1005)
R1503	1-208-911-81 s	RES, CHIP 10K (1005)
R1504	1-208-915-81 s	RES, CHIP 15K (1005)
R1505	1-208-935-81 s	RES, CHIP 100K (1005)
R1506	1-208-911-81 s	RES, CHIP 10K (1005)
R1507	1-208-915-81 s	RES, CHIP 15K (1005)
R1508	1-208-927-81 s	RES, CHIP 47K (1005)
R1509	1-208-895-81 s	RES, CHIP 2.2K (1005)
R1511	1-208-911-81 s	RES, CHIP 10K (1005)
R1513	1-208-927-81 s	RES, CHIP 47K (1005)
R1514	1-208-887-81 s	RES, CHIP 1.0K (1005)
R1521	1-208-911-81 s	RES, CHIP 10K (1005)
R1522	1-208-887-81 s	RES, CHIP 1.0K (1005)
R1523	1-208-911-81 s	RES, CHIP 10K (1005)
R1524	1-208-923-81 s	RES, CHIP 33K (1005)
R1525	1-208-927-81 s	RES, CHIP 47K (1005)
R1526	1-218-989-81 s	RES, CHIP 1M (1005)
R1527	1-208-923-81 s	RES, CHIP 33K (1005)
R1528	1-208-943-81 s	RES, CHIP 220K (1005)
R1529	1-208-903-81 s	RES, CHIP 4.7K (1005)
R1531	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R1532	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R1534	1-208-927-81 s	RES, CHIP 47K (1005)
RB300	1-234-378-21 s	RES, NETWORK 10K (1005X4)
RB301	1-234-378-21 s	RES, NETWORK 10K (1005X4)
RB304	1-234-378-21 s	RES, NETWORK 10K (1005X4)
RB305	1-234-378-21 s	RES, NETWORK 10K (1005X4)
RB306	1-234-378-21 s	RES, NETWORK 10K (1005X4)
RB307	1-234-378-21 s	RES, NETWORK 10K (1005X4)
RB308	1-234-400-21 s	CONDUCTOR, NETWORK (1005X4)
RB309	1-234-400-21 s	CONDUCTOR, NETWORK (1005X4)
RB310	1-234-400-21 s	CONDUCTOR, NETWORK (1005X4)
RB311	1-234-400-21 s	CONDUCTOR, NETWORK (1005X4)
RB313	1-234-400-21 s	CONDUCTOR, NETWORK (1005X4)
RB314	1-234-400-21 s	CONDUCTOR, NETWORK (1005X4)
RB315	1-234-400-21 s	CONDUCTOR, NETWORK (1005X4)
RB316	1-234-400-21 s	CONDUCTOR, NETWORK (1005X4)
RB317	1-234-400-21 s	CONDUCTOR, NETWORK (1005X4)
RB318	1-234-400-21 s	CONDUCTOR, NETWORK (1005X4)
RB319	1-234-400-21 s	CONDUCTOR, NETWORK (1005X4)
RB320	1-234-400-21 s	CONDUCTOR, NETWORK (1005X4)
RB403	1-234-377-21 s	RES, NETWORK 4.7K (1005X4)
RB404	1-234-380-21 s	RES, NETWORK 47K (1005X4)
RB500	1-234-380-21 s	RES, NETWORK 47K (1005X4)
RB501	1-234-380-21 s	RES, NETWORK 47K (1005X4)
RB502	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB504	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB505	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB506	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB507	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB510	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB514	1-234-378-21 s	RES, NETWORK 10K (1005X4)
RB515	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB516	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB517	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB518	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB519	1-234-377-21 s	RES, NETWORK 4.7K (1005X4)
RB522	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB524	1-234-377-21 s	RES, NETWORK 4.7K (1005X4)
RB601	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB602	1-234-378-21 s	RES, NETWORK 10K (1005X4)
RB603	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB604	1-234-372-21 s	RES, NETWORK 100 (1005X4)

SY-427 BOARD

Ref. No. or Q'ty	Part No.	SP Description
RB700	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB701	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB702	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB703	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB704	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB705	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB706	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB707	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB708	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB800	1-234-378-21 s	RES, NETWORK 10K (1005X4)
RB801	1-234-375-21 s	RES, NETWORK 1K (1005X4)
RB802	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB900	1-234-378-21 s	RES, NETWORK 10K (1005X4)
RB901	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB902	1-234-378-21 s	RES, NETWORK 10K (1005X4)
RB903	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB904	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB905	1-234-378-21 s	RES, NETWORK 10K (1005X4)
RB1200	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB1201	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB1202	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB1203	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB1300	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB1301	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB1303	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB1304	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB1400	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB1401	1-234-378-21 s	RES, NETWORK 10K (1005X4)
RV1400	1-225-811-21 s	RES, ADJ, CERMET 20K
S3	1-771-796-21 s	SWITCH, SLIDE
S300	1-771-709-41 s	SWITCH, SLIDE
S800	1-692-270-41 s	SWITCH, SLIDE
THP200 	1-803-615-21 s	THERMISTOR, POSITIVE
THP201 	1-803-615-21 s	THERMISTOR, POSITIVE
THP202 	1-803-615-21 s	THERMISTOR, POSITIVE
TP300	1-535-877-22 s	CHIP, CHECKER
VD1201	1-811-889-11 s	VARISTOR, CHIP
VDR300	1-802-245-11 s	ESD SUPPRESSOR
VDR301	1-802-245-11 s	ESD SUPPRESSOR
X700	1-813-253-12 s	OSCILLATOR, CRYSTAL (VCXO) 5V

TX-146/146A BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-2042-104-A s	MOUNTED CIRCUIT BOARD, TX-146A
1pc 	1-458-776-11 s	MODULE, OPTICAL (SFP+)
1pc	4-476-418-01 s	CAGE, SINGLE PORT
C003	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C004	1-118-033-11 o	CAP, CERAMIC 0.047MF X5R (0603)
C006	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C009	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C012	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C013	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C014	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C015	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C016	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C017	1-118-039-11 s	CAP, CERAMIC 1MF X5R (1608)

TX-146/146A BOARD

Ref. No. or Q'ty	Part No.	SP Description
C019	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C109	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C110	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C111	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C200	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C201	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C204	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C205	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C206	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C302	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C303	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C305	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C308	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C310	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C311	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C312	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C313	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C316	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C317	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C318	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C321	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C322	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C323	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C400	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C401	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C402	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C408	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C409	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C411	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C412	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C413	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C414	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C415	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C418	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C419	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C420	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C425	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C426	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C430	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C431	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C432	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C433	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C434	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C435	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C436	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C437	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C438	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C439	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C440	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C441	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C442	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C443	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C444	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C445	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C446	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C447	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C448	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C449	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C450	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C451	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C452	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C453	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C454	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C455	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C456	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005

TX-146/146A BOARD

Ref. No. or Q'ty	Part No.	SP Description
C826	1-131-661-21 s	CAP, CHIP ELECT 100MF (6.3X5.7)
C827	1-116-705-11 s	CAP, CERAMIC 47MF X5R 3225
C828	1-116-705-11 s	CAP, CERAMIC 47MF X5R 3225
C902	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C903	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C904	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C907	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C908	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C909	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C912	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C913	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C914	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
CN001	1-770-627-21 s	PIN, CONNECTOR 10P
CN200	1-785-551-21 o	CONNECTOR, BOARD TO BOARD 120P
CN300	1-843-867-11 s	CONNECTOR, SFP+ 20P
D001	6-502-598-01 s	DI SML-D12U8WT86
D002	6-502-598-01 s	DI SML-D12U8WT86
D003	6-502-598-01 s	DI SML-D12U8WT86
D004	6-502-598-01 s	DI SML-D12U8WT86
D005	6-502-197-01 s	DI SML-D12M8WT86SM
D006	6-502-197-01 s	DI SML-D12M8WT86SM
D007	6-502-197-01 s	DI SML-D12M8WT86SM
D008	6-502-197-01 s	DI SML-D12M8WT86SM
D009	6-502-598-01 s	DI SML-D12U8WT86
D010	6-502-598-01 s	DI SML-D12U8WT86
D011	6-502-598-01 s	DI SML-D12U8WT86
D012	6-502-598-01 s	DI SML-D12U8WT86
D013	6-502-197-01 s	DI SML-D12M8WT86SM
D014	6-502-197-01 s	DI SML-D12M8WT86SM
D015	6-502-197-01 s	DI SML-D12M8WT86SM
D016	6-502-197-01 s	DI SML-D12M8WT86SM
D300	6-502-598-01 s	DI SML-D12U8WT86
D301	6-502-598-01 s	DI SML-D12U8WT86
D302	6-502-598-01 s	DI SML-D12U8WT86
D303	6-502-598-01 s	DI SML-D12U8WT86
D400	6-502-598-01 s	DI SML-D12U8WT86
D401	6-502-598-01 s	DI SML-D12U8WT86
D402	6-502-598-01 s	DI SML-D12U8WT86
D403	6-502-598-01 s	DI SML-D12U8WT86
D404	6-502-598-01 s	DI SML-D12U8WT86
D405	6-502-598-01 s	DI SML-D12U8WT86
D600	6-502-598-01 s	DI SML-D12U8WT86
D700	6-502-598-01 s	DI SML-D12U8WT86
FB001	1-469-122-21 s	FERRITE, EMI (SMD) (1608)
FB002	1-469-122-21 s	FERRITE, EMI (SMD) (1608)
FB300	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB400	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB401	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB402	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB403	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB404	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB405	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB406	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB407	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB408	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB409	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB410	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB411	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB700	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB701	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB702	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB704	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB705	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB706	1-414-864-21 s	FERRITE, EMI (SMD) (1608)

TX-146/146A BOARD

Ref. No. or Q'ty	Part No.	SP Description
FB707	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB708	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB709	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB710	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB711	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB714	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB715	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB716	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB717	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB718	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB719	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB720	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB722	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB723	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB724	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB726	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB727	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB728	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB729	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB730	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB731	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB732	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB734	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB735	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB736	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB738	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB739	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB740	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB741	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
IC002	6-701-946-01 s	IC R3112N271A-TR-FE
IC004	6-716-953-01 s	IC W25Q64CVSSIG
IC005	6-711-485-01 s	IC TC74VCX125FK(EL)
IC006	6-718-935-01 s	IC TC7SZ04FE(T5RSY,F)
IC007	6-711-485-01 s	IC TC74VCX125FK(EL)
IC008	6-712-373-01 s	IC TC7SH34FU
IC009	6-719-007-01 s	IC TC7SZ08FE
IC010	6-704-976-01 s	IC ADR381ARTZ-REEL7
IC215	6-711-915-01 s	IC LM73CIMK-0
IC300	6-706-482-01 s	IC TC7SH00FU
IC301	6-707-839-01 s	IC TC74LCX04FT(EKJ)
IC302	6-718-935-01 s	IC TC7SZ04FE(T5RSY,F)
IC400	6-705-771-01 s	IC SN74LVC1G32DCKR
IC401	6-721-210-01 s	IC CDCV304PWR
IC402	6-721-209-01 s	IC MC100LVEP16DTR2G
IC403	8-759-669-66 s	IC TLC272CPWR-12
IC404	6-710-109-01 s	IC NB100LVEP56MNR2G
IC405	6-715-439-01 s	IC CDCM7005ZVAT
IC406	6-715-439-01 s	IC CDCM7005ZVAT
IC600	6-715-041-01 s	IC TC7SZ125FU,RSOYJ
IC700	6-702-821-01 s	IC R3112N421A-TR-FE
IC701	6-719-007-01 s	IC TC7SZ08FE
IC702	6-713-169-01 s	IC LTC3412AEFE#TR
IC703	6-713-169-01 s	IC LTC3412AEFE#TR
IC704	6-713-169-01 s	IC LTC3412AEFE#TR
IC706	6-713-169-01 s	IC LTC3412AEFE#TR
IC707	6-713-169-01 s	IC LTC3412AEFE#TR
L010	1-481-175-21 s	INDUCTOR 4.7UH
L300	1-481-175-21 s	INDUCTOR 4.7UH
L301	1-481-175-21 s	INDUCTOR 4.7UH
L400	1-400-135-21 s	INDUCTOR 1UH (2012)
L401	1-400-135-21 s	INDUCTOR 1UH (2012)
L700	1-457-372-21 s	COIL, CHOKE 1UH
L701	1-457-372-21 s	COIL, CHOKE 1UH
L702	1-457-372-21 s	COIL, CHOKE 1UH
L703	1-457-372-21 s	COIL, CHOKE 1UH

TX-146/146A BOARD

Ref. No. or Q'ty	Part No.	SP Description
L705	1-457-372-21 s	COIL, CHOKE 1UH
L706	1-457-372-21 s	COIL, CHOKE 1UH
Q001	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q002	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q003	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q004	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q005	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q006	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q007	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q008	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q009	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q010	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q011	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q012	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q013	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q014	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q015	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q016	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q400	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q401	6-550-363-01 s	TRANSISTOR 2SB1690KT146
Q402	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q403	6-550-363-01 s	TRANSISTOR 2SB1690KT146
Q404	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q405	6-550-363-01 s	TRANSISTOR 2SB1690KT146
Q406	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q407	6-550-363-01 s	TRANSISTOR 2SB1690KT146
Q408	8-729-928-55 s	TRANSISTOR DTA123JE-TL
Q409	8-729-928-55 s	TRANSISTOR DTA123JE-TL
Q410	8-729-928-55 s	TRANSISTOR DTA123JE-TL
Q411	8-729-928-55 s	TRANSISTOR DTA123JE-TL
Q412	8-729-928-55 s	TRANSISTOR DTA123JE-TL
Q413	8-729-928-55 s	TRANSISTOR DTA123JE-TL
Q700	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q701	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q702	8-729-928-55 s	TRANSISTOR DTA123JE-TL
Q703	8-729-928-82 s	TRANSISTOR DTC144EE-TL
R001	1-208-887-81 s	RES, CHIP 1.0K (1005)
R008	1-208-903-81 s	RES, CHIP 4.7K (1005)
R010	1-208-903-81 s	RES, CHIP 4.7K (1005)
R011	1-208-903-81 s	RES, CHIP 4.7K (1005)
R012	1-208-903-81 s	RES, CHIP 4.7K (1005)
R013	1-208-903-81 s	RES, CHIP 4.7K (1005)
R016	1-208-875-81 s	RES, CHIP 330 (1005)
R018	1-208-903-81 s	RES, CHIP 4.7K (1005)
R019	1-208-895-81 s	RES, CHIP 2.2K (1005)
R020	1-208-895-81 s	RES, CHIP 2.2K (1005)
R021	1-220-878-81 s	RES, CHIP 22 (1005)
R022	1-220-878-81 s	RES, CHIP 22 (1005)
R023	1-220-878-81 s	RES, CHIP 22 (1005)
R024	1-220-878-81 s	RES, CHIP 22 (1005)
R025	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R026	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R027	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R028	1-220-878-81 s	RES, CHIP 22 (1005)
R030	1-220-878-81 s	RES, CHIP 22 (1005)
R031	1-220-878-81 s	RES, CHIP 22 (1005)
R032	1-220-878-81 s	RES, CHIP 22 (1005)
R033	1-220-878-81 s	RES, CHIP 22 (1005)
R034	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R035	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R036	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R037	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R038	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R039	1-218-990-81 s	CONDUCTOR, CHIP (1005)

TX-146/146A BOARD

Ref. No. or Q'ty	Part No.	SP Description
R040	1-208-903-81 s	RES, CHIP 4.7K (1005)
R044	1-220-878-81 s	RES, CHIP 22 (1005)
R045	1-220-878-81 s	RES, CHIP 22 (1005)
R046	1-220-878-81 s	RES, CHIP 22 (1005)
R047	1-220-878-81 s	RES, CHIP 22 (1005)
R048	1-220-878-81 s	RES, CHIP 22 (1005)
R049	1-220-878-81 s	RES, CHIP 22 (1005)
R050	1-220-878-81 s	RES, CHIP 22 (1005)
R051	1-208-903-81 s	RES, CHIP 4.7K (1005)
R055	1-208-887-81 s	RES, CHIP 1.0K (1005)
R056	1-208-903-81 s	RES, CHIP 4.7K (1005)
R057	1-208-903-81 s	RES, CHIP 4.7K (1005)
R100	1-208-863-81 s	RES, CHIP 100 (1005)
R101	1-208-863-81 s	RES, CHIP 100 (1005)
R102	1-208-863-81 s	RES, CHIP 100 (1005)
R200	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R201	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R202	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R203	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R204	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R205	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R206	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R207	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R209	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R210	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R228	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R229	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R230	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R231	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R232	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R233	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R234	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R235	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R236	1-208-863-81 s	RES, CHIP 100 (1005)
R239	1-208-903-81 s	RES, CHIP 4.7K (1005)
R240	1-208-903-81 s	RES, CHIP 4.7K (1005)
R241	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R242	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R243	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R244	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R245	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R246	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R247	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R248	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R249	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R250	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R251	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R252	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R253	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R254	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R256	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R257	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R258	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R259	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R260	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R261	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R262	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R263	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R264	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R265	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R308	1-208-903-81 s	RES, CHIP 4.7K (1005)
R309	1-208-903-81 s	RES, CHIP 4.7K (1005)
R310	1-208-911-81 s	RES, CHIP 10K (1005)
R311	1-208-911-81 s	RES, CHIP 10K (1005)
R312	1-208-911-81 s	RES, CHIP 10K (1005)

TX-146/146A BOARD

Ref. No. or Q'ty	Part No.	SP Description
R316	1-208-911-81 s	RES, CHIP 10K (1005)
R317	1-208-959-81 s	RES, CHIP 1M (1005)
R318	1-208-855-81 s	RES, CHIP 47 (1005)
R319	1-208-895-81 s	RES, CHIP 2.2K (1005)
R320	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R321	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R322	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R400	1-208-911-81 s	RES, CHIP 10K (1005)
R401	1-208-911-81 s	RES, CHIP 10K (1005)
R402	1-208-911-81 s	RES, CHIP 10K (1005)
R403	1-208-911-81 s	RES, CHIP 10K (1005)
R404	1-208-911-81 s	RES, CHIP 10K (1005)
R405	1-208-911-81 s	RES, CHIP 10K (1005)
R406	1-208-911-81 s	RES, CHIP 10K (1005)
R407	1-208-911-81 s	RES, CHIP 10K (1005)
R408	1-208-911-81 s	RES, CHIP 10K (1005)
R409	1-208-911-81 s	RES, CHIP 10K (1005)
R413	1-208-863-81 s	RES, CHIP 100 (1005)
R414	1-208-911-81 s	RES, CHIP 10K (1005)
R415	1-208-911-81 s	RES, CHIP 10K (1005)
R416	1-208-911-81 s	RES, CHIP 10K (1005)
R418	1-208-911-81 s	RES, CHIP 10K (1005)
R419	1-208-911-81 s	RES, CHIP 10K (1005)
R420	1-208-911-81 s	RES, CHIP 10K (1005)
R421	1-208-887-81 s	RES, CHIP 1.0K (1005)
R426	1-208-887-81 s	RES, CHIP 1.0K (1005)
R427	1-208-911-81 s	RES, CHIP 10K (1005)
R428	1-208-911-81 s	RES, CHIP 10K (1005)
R429	1-208-911-81 s	RES, CHIP 10K (1005)
R431	1-208-887-81 s	RES, CHIP 1.0K (1005)
R432	1-208-911-81 s	RES, CHIP 10K (1005)
R433	1-208-887-81 s	RES, CHIP 1.0K (1005)
R434	1-220-882-81 s	RES, CHIP 33 (1005)
R435	1-220-882-81 s	RES, CHIP 33 (1005)
R436	1-220-882-81 s	RES, CHIP 33 (1005)
R437	1-220-882-81 s	RES, CHIP 33 (1005)
R438	1-208-911-81 s	RES, CHIP 10K (1005)
R439	1-208-887-81 s	RES, CHIP 1.0K (1005)
R441	1-208-895-81 s	RES, CHIP 2.2K (1005)
R446	1-208-887-81 s	RES, CHIP 1.0K (1005)
R447	1-208-863-81 s	RES, CHIP 100 (1005)
R448	1-208-863-81 s	RES, CHIP 100 (1005)
R449	1-208-887-81 s	RES, CHIP 1.0K (1005)
R452	1-208-871-81 s	RES, CHIP 220 (1005)
R453	1-208-911-81 s	RES, CHIP 10K (1005)
R454	1-208-911-81 s	RES, CHIP 10K (1005)
R455	1-208-871-81 s	RES, CHIP 220 (1005)
R458	1-208-887-81 s	RES, CHIP 1.0K (1005)
R460	1-208-895-81 s	RES, CHIP 2.2K (1005)
R462	1-208-871-81 s	RES, CHIP 220 (1005)
R463	1-208-871-81 s	RES, CHIP 220 (1005)
R464	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R465	1-208-863-81 s	RES, CHIP 100 (1005)
R466	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R467	1-208-887-81 s	RES, CHIP 1.0K (1005)
R468	1-208-887-81 s	RES, CHIP 1.0K (1005)
R470	1-208-871-81 s	RES, CHIP 220 (1005)
R471	1-208-871-81 s	RES, CHIP 220 (1005)
R472	1-208-887-81 s	RES, CHIP 1.0K (1005)
R474	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R475	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R476	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R477	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R478	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R479	1-218-990-81 s	CONDUCTOR, CHIP (1005)




TX-146/146A BOARD

Ref. No. or Q'ty	Part No.	SP Description
R480	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R481	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R482	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R483	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R484	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R485	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R486	1-208-887-81 s	RES, CHIP 1.0K (1005)
R487	1-208-887-81 s	RES, CHIP 1.0K (1005)
R488	1-208-911-81 s	RES, CHIP 10K (1005)
R493	1-208-911-81 s	RES, CHIP 10K (1005)
R495	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R496	1-208-887-81 s	RES, CHIP 1.0K (1005)
R498	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R500	1-208-887-81 s	RES, CHIP 1.0K (1005)
R502	1-208-863-81 s	RES, CHIP 100 (1005)
R503	1-208-863-81 s	RES, CHIP 100 (1005)
R504	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R505	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R506	1-208-871-81 s	RES, CHIP 220 (1005)
R507	1-208-871-81 s	RES, CHIP 220 (1005)
R508	1-208-871-81 s	RES, CHIP 220 (1005)
R509	1-208-871-81 s	RES, CHIP 220 (1005)
R510	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R511	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R512	1-208-856-81 s	RES, CHIP 51 (1005)
R700	1-208-895-81 s	RES, CHIP 2.2K (1005)
R701	1-208-911-81 s	RES, CHIP 10K (1005)
R702	1-208-903-81 s	RES, CHIP 4.7K (1005)
R703	1-208-911-81 s	RES, CHIP 10K (1005)
R704	1-208-911-81 s	RES, CHIP 10K (1005)
R706	1-208-899-81 s	RES, CHIP 3.3K (1005)
R709	1-208-903-81 s	RES, CHIP 4.7K (1005)
R713	1-208-903-81 s	RES, CHIP 4.7K (1005)
R715	1-208-911-81 s	RES, CHIP 10K (1005)
R716	1-208-911-81 s	RES, CHIP 10K (1005)
R717	1-208-911-81 s	RES, CHIP 10K (1005)
R718	1-208-885-81 s	RES, CHIP 820 (1005)
R720	1-208-911-81 s	RES, CHIP 10K (1005)
R721	1-208-883-81 s	RES, CHIP 680 (1005)
R722	1-208-935-81 s	RES, CHIP 100K (1005)
R723	1-208-935-81 s	RES, CHIP 100K (1005)
R724	1-208-935-81 s	RES, CHIP 100K (1005)
R726	1-208-935-81 s	RES, CHIP 100K (1005)
R727	1-208-935-81 s	RES, CHIP 100K (1005)
R728	1-208-911-81 s	RES, CHIP 10K (1005)
R729	1-208-911-81 s	RES, CHIP 10K (1005)
R730	1-208-915-81 s	RES, CHIP 15K (1005)
R732	1-208-911-81 s	RES, CHIP 10K (1005)
R733	1-208-915-81 s	RES, CHIP 15K (1005)
R734	1-208-943-81 s	RES, CHIP 220K (1005)
R735	1-208-943-81 s	RES, CHIP 220K (1005)
R736	1-208-943-81 s	RES, CHIP 220K (1005)
R738	1-208-943-81 s	RES, CHIP 220K (1005)
R739	1-208-943-81 s	RES, CHIP 220K (1005)
R740	1-243-975-81 s	RES, CHIP 4.7M (1005)
R741	1-243-975-81 s	RES, CHIP 4.7M (1005)
R742	1-243-975-81 s	RES, CHIP 4.7M (1005)
R744	1-243-975-81 s	RES, CHIP 4.7M (1005)
R745	1-243-975-81 s	RES, CHIP 4.7M (1005)
R746	1-243-975-81 s	RES, CHIP 4.7M (1005)
R747	1-243-975-81 s	RES, CHIP 4.7M (1005)
R748	1-243-975-81 s	RES, CHIP 4.7M (1005)
R750	1-243-975-81 s	RES, CHIP 4.7M (1005)
R751	1-243-975-81 s	RES, CHIP 4.7M (1005)
R752	1-208-878-81 s	RES, CHIP 430 (1005)

TX-146/146A BOARD**Ref. No.****or Q'ty Part No. SP Description**

R753	1-208-867-81	s	RES, CHIP 150 (1005)
R754	1-208-893-81	s	RES, CHIP 1.8K (1005)
R756	1-208-911-81	s	RES, CHIP 10K (1005)
R757	1-208-870-81	s	RES, CHIP 200 (1005)
R758	1-208-903-81	s	RES, CHIP 4.7K (1005)
R759	1-208-906-81	s	RES, CHIP 6.2K (1005)
R760	1-208-917-81	s	RES, CHIP 18K (1005)
R762	1-208-863-81	s	RES, CHIP 100 (1005)
R763	1-208-927-81	s	RES, CHIP 47K (1005)
R764	1-220-230-91	s	RES,SQUARE TYPE CHIP 2.2 (3225)
R765	1-220-230-91	s	RES,SQUARE TYPE CHIP 2.2 (3225)
R766	1-220-230-91	s	RES,SQUARE TYPE CHIP 2.2 (3225)
R768	1-220-230-91	s	RES,SQUARE TYPE CHIP 2.2 (3225)
R769	1-220-230-91	s	RES,SQUARE TYPE CHIP 2.2 (3225)
R770	1-219-684-21	s	RES, CHIP (SQUARE TYPE) 0.01
R771	1-219-684-21	s	RES, CHIP (SQUARE TYPE) 0.01
R782	1-208-899-81	s	RES, CHIP 3.3K (1005)
RB001	1-234-377-21	s	RES, NETWORK 4.7K (1005X4)
RB100	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB101	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB102	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB103	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB104	1-234-380-21	s	RES, NETWORK 47K (1005X4)
RB105	1-234-380-21	s	RES, NETWORK 47K (1005X4)
RB106	1-234-380-21	s	RES, NETWORK 47K (1005X4)
RB107	1-234-380-21	s	RES, NETWORK 47K (1005X4)
RB300	1-234-375-21	s	RES, NETWORK 1K (1005X4)
S001	1-771-721-21	s	SWITCH, TACTILE
S002	1-771-721-21	s	SWITCH, TACTILE
S003	1-771-721-21	s	SWITCH, TACTILE
S004	1-692-271-41	s	SWITCH, SLIDE
S005	1-692-270-41	s	SWITCH, SLIDE
TP001	1-535-877-22	s	CHIP, CHECKER
TP002	1-535-877-22	s	CHIP, CHECKER
TP003	1-535-877-22	s	CHIP, CHECKER
TP400	1-535-877-22	s	CHIP, CHECKER
VCO400	1-813-530-11	s	OSCILLATOR, CRYSTAL (VCXO) 3.3
VCO401	1-813-529-11	s	OSCILLATOR, CRYSTAL (VCXO) 3.3
VCO402	1-814-746-11	s	OSCILLATOR, CRYSTAL 133.65MHZ
VCO403	1-814-747-11	s	OSCILLATOR CRYSTAL133.516484MH
X300	1-813-419-11	s	OSCILLATOR,CRYSTAL DSO321SV




AT-189
AT-189 (1/4)

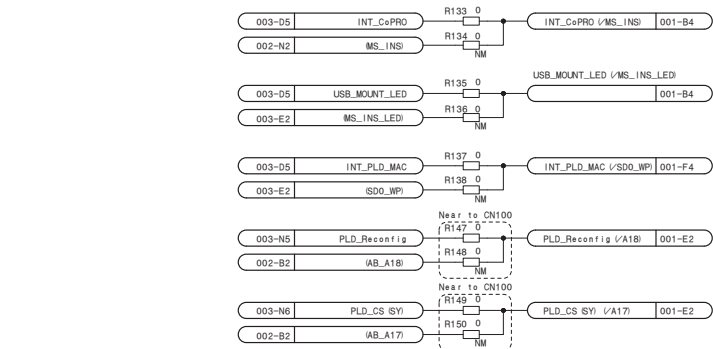

Reset sequence generator
(interval 10ms)

AT-189 (1/4)
BOARD NO. 1-885-937-11
AT-189 1


CA4000

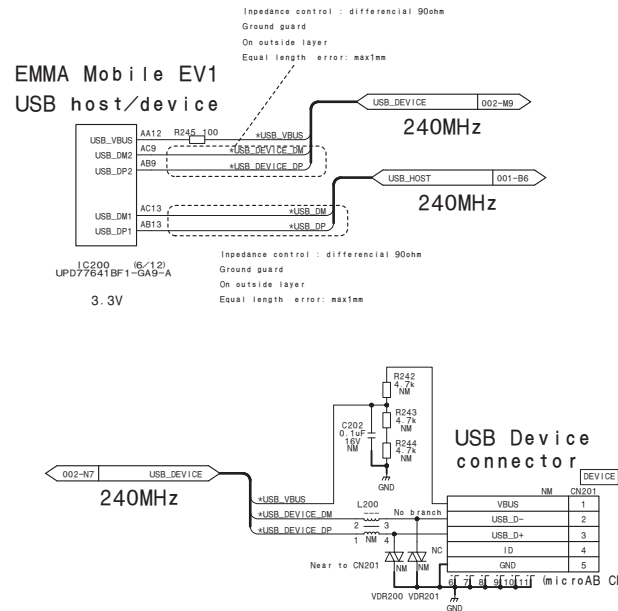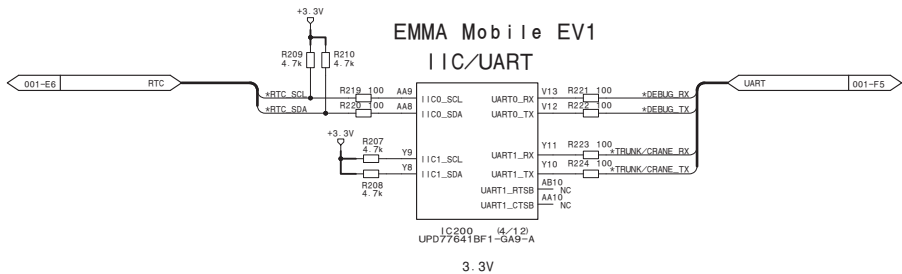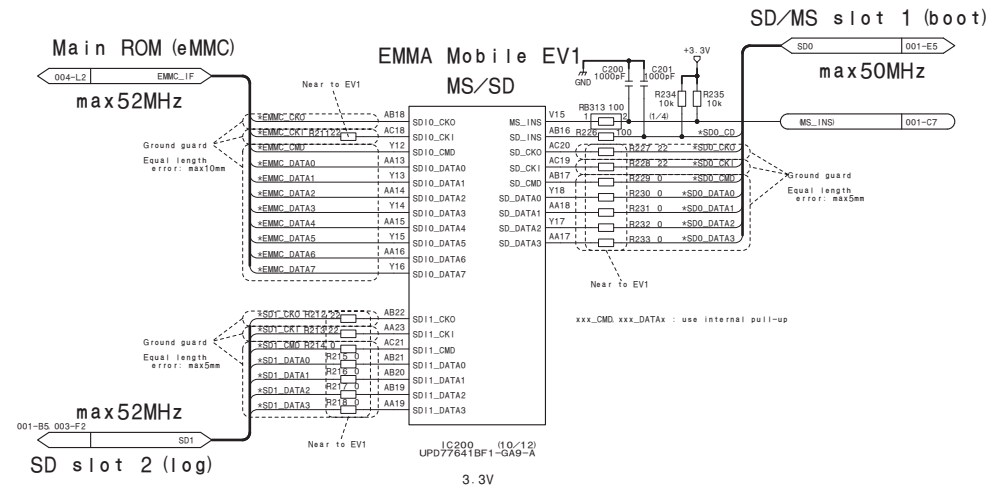


AT-189 (2/4)
BOARD NO. 1-885-937-11
AT-189 2

AT-189 (3/4)



EMMA Mobile EV1

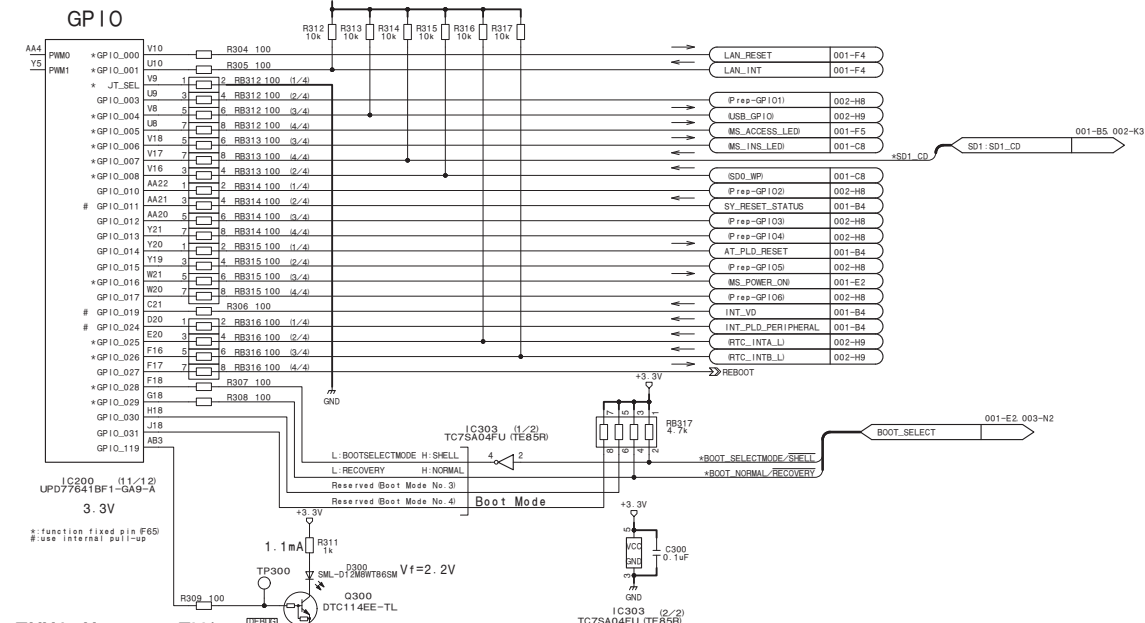


EMMA Mobile EV1

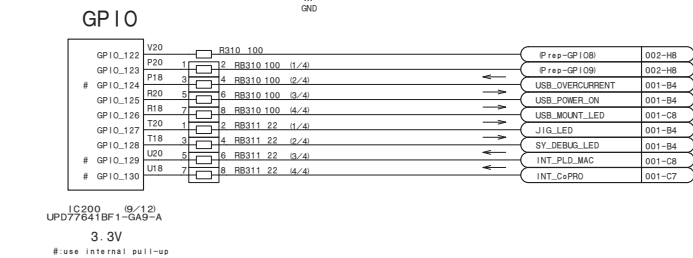


EMMA Mobile EV1

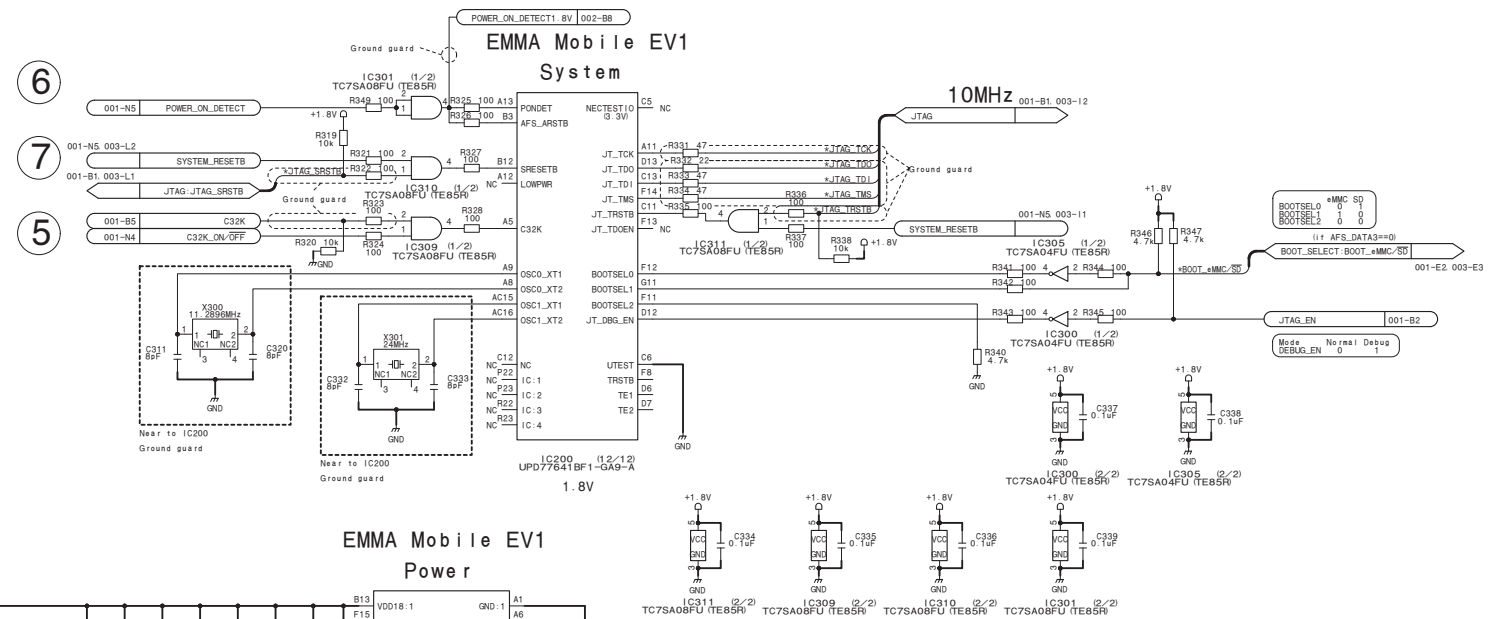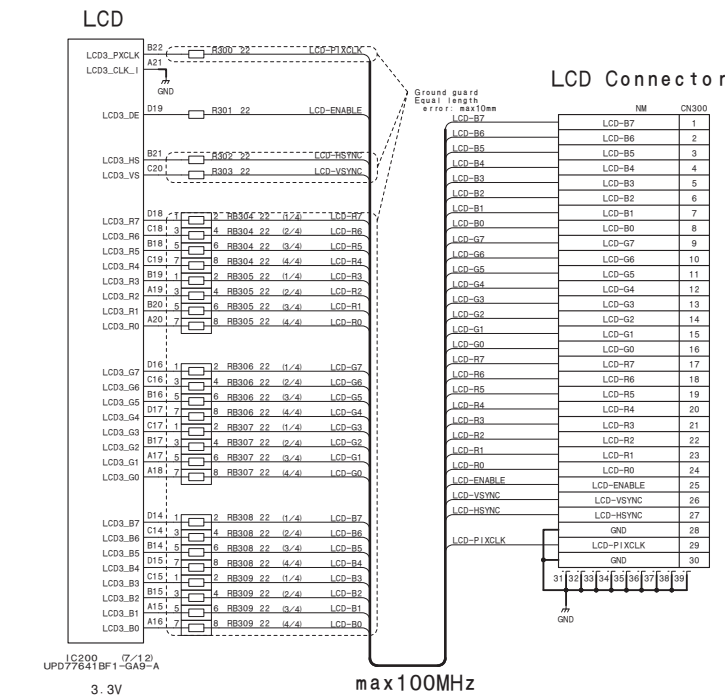

EMMA Mobile EV1

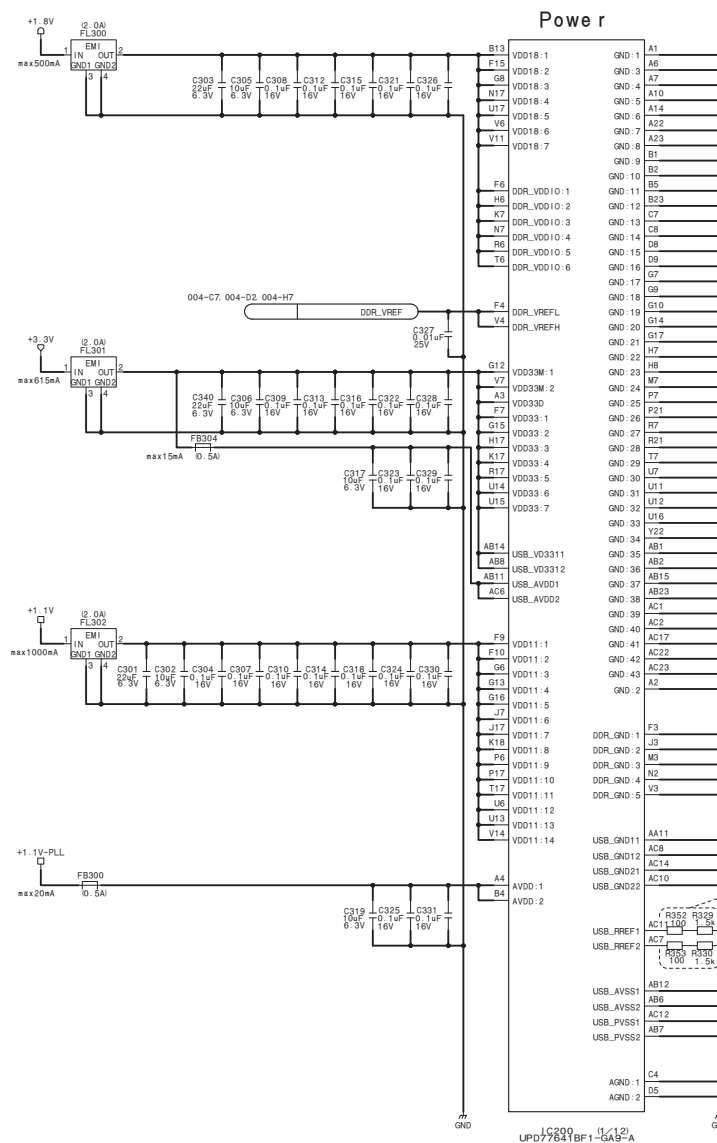

EMMA Mobile EV1

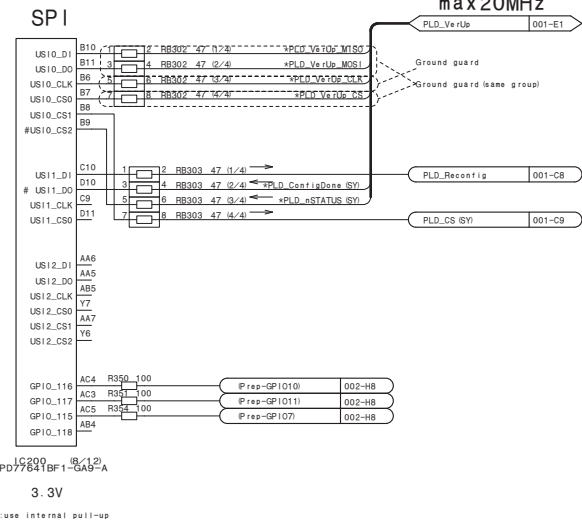

EMMA Mobile EV1 GPIO/SPI/System/Power


AT-189 (3/4)

BOARD NO. 1-885-937-11
AT-189_3




CN-3601


SY427

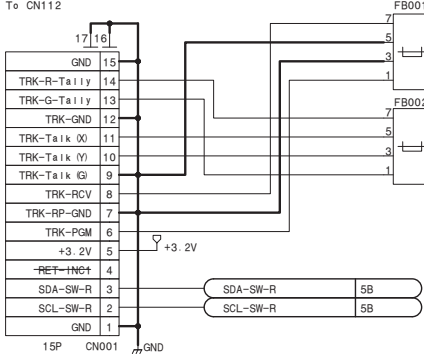


PS



TRACKER CN

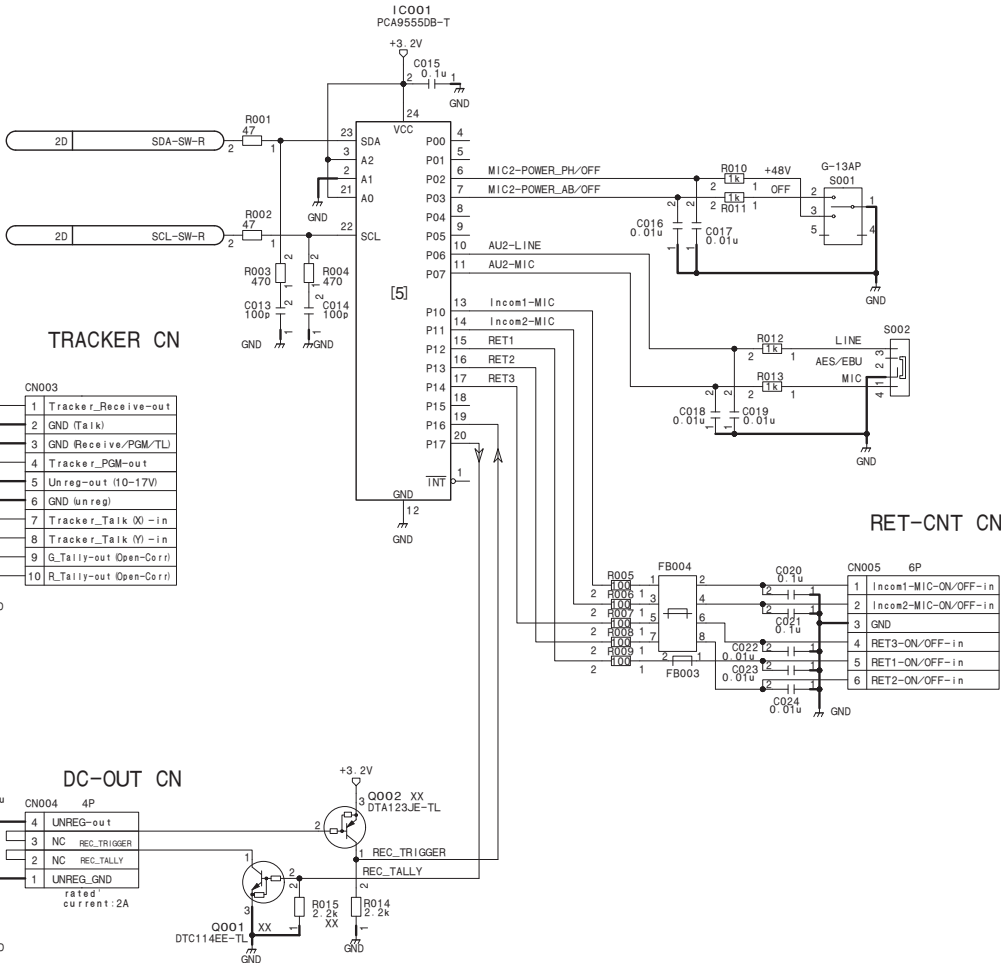

SY427

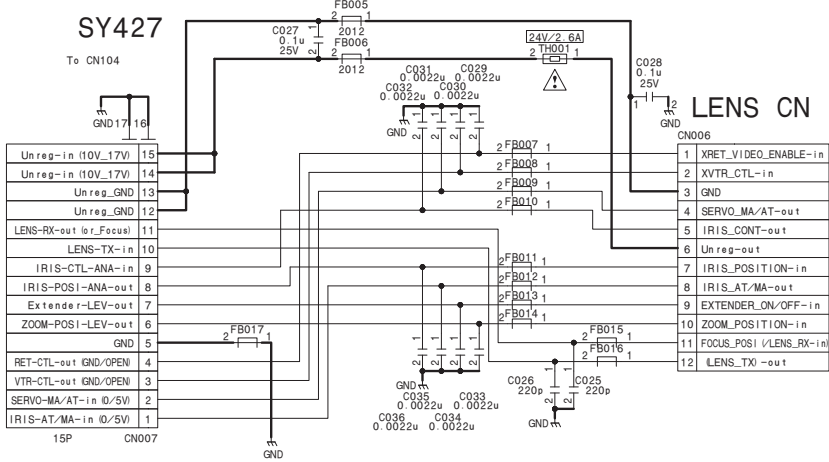

LENS CN

TRK-Panel, LENS-CN

CN-3601

BOARD NO. 1-889-930-11
CN-3601_1

[illegible]

CN-3602
BOARD NO. 1-889-931-11
CN-3602_1

[illegible]

CN-3603
BOARD NO. 1-889-927-11
CN-3603_1

External DC IN

PS
Te CN3001

8P	CN2
EXT_DC #H	1
EXT_DC #H	2
EXT_DC #C	3
EXT_DC #C	4
EXT_DC #H	5
EXT_DC #H	6
EXT_DC #C	7
EXT_DC #C	8

rated current:3A

F-B1 2
F-B2 2
F-B3 2
F-B4 2
F-B5 2
F-B6 2
F-B7 2
F-B8 2

0.33uF
0.33uF
C3
F-GND

F-GND

CN1

14V/10A

DC-IN

CN-3605
BOARD NO. 1-889-923-11
CN-3605_1

[illegible]

CN-3606
BOARD NO. 1-889-928-11
CN-3606_1

CN-3607_1

From PS-869B

20P CN001

1 GND

2 PB_OUT_INDICATOR

3 GND

4 GND

5 GND

6 GND

7 GND

8 GND

9 GND

10 GND

11 F65

12 F65

13 F65

14 F65

15 F65

16 F65

17 F65

18 F65

19 F65

20 F65

R001 1.16W 0.5% CL-197HG5-CD-T

D001

C004 0.1uF

C002 25V 1608

C001 25V 1608

DC_OUT

FB001

FB002

FB003

FB004

FB005

FB006

FB007

FB008

C003 25V 3225

5 CN002

1 4

2 3

F-GND

CN-3616

BOARD NO. 1-889-886-1

CN-3616_11S_1

CN-3616_11S_1

The schematic diagram illustrates the electrical connections for the CN-3617 board. On the left, a power supply unit (PS-869B) is connected to the board via an 8-pin connector (CN001). The pins are labeled: UNREG 1, UNREG 2, GND 3, GND 4, UNREG 5, UNREG 6, GND 7, and GND 8. The board contains several resistors (FB001-FB008) and capacitors (C0001, C0002, C0003). A DC_OUT source is connected to the board via a 5-pin connector (CN002). The pins are labeled: 1, 2, 3, 4, and 5. A ground connection (F-GND) is also shown. The board is labeled with the part number CN-3617 and the board number 1-889-887.

CN-3617_11S_1

The schematic diagram illustrates the electrical connections between the DPR351 board and two external components: a SY427 board and a DVF CN connector.

DPR351 Board Connections:

- 30P CN100:** A 30-pin connector with pins 1-12 connected to GND. Pins 13-29 are connected to LVDS signals: LVDS_5+, LVDS_5-, LVDS_4+, LVDS_4-, LVDS_CLK+, LVDS_CLK-, LVDS_3+, LVDS_3-, LVDS_2+, LVDS_2-, LVDS_1+, and LVDS_1-. Pin 30 is connected to GND.
- FB100:** A buffer with pins 1, 2, 3, 4, 5, 6, 7, and 8. Pins 1, 2, 3, 4, 5, 6, and 7 are connected to SRX, SCLK, SDAT, and VF_ON signals. Pin 8 is connected to GND.
- C101:** A 0.001uF capacitor connected between pins 1 and 8 of FB100.

SY427 Board Connections:

- 4P CN101:** A 4-pin connector with pins 1 and 2 connected to UNREG, and pins 3 and 4 connected to GND.
- TH100:** A 24V/2.6A power connector with a 0.001uF capacitor connected between pins 1 and 2.


DVF CN Connector Connections:

- 102:** A 26-pin connector with pins 1-12 connected to LVDS signals: LVDS_1-, LVDS_2-, LVDS_3-, LVDS_CLK-, LVDS_4-, LVDS_5-, VF_ON, and SDAT. Pins 13-14 are connected to GND. Pins 15-16 are connected to LVDS_1+, LVDS_2+, LVDS_3+, and LVDS_CLK+. Pins 17-18 are connected to LVDS_4+, LVDS_5+, SRX, and SCLK. Pins 19-20 are connected to UNREG. Pins 21-22 are connected to UNREG. Pins 23-24 are connected to UNREG. Pins 25-26 are connected to GND.
- R100:** A 0-ohm resistor connected between pins 1 and 2.

The diagram shows the wiring for two modules: SY427 and SW1594. The SY427 module has a 5-pin connector with the following labels: 5P, CN103, +5V, 1, RET (H) -ON/OFF, 2, INCOM (H) -ON/OFF, 3, H-R-TALLY, 4, and GND, 5. The SW1594 module has a 5-pin connector with the following labels: CN104, 5P, +5V, 1, RET (H) -ON/OFF, 2, INCOM (H) -ON/OFF, 3, H-R-TALLY, 4, and 5 GND. Wires connect the +5V pins of both modules to a common ground point labeled GND.



CN-3624_1

DPR-351
DPR-351 (1/7)_L

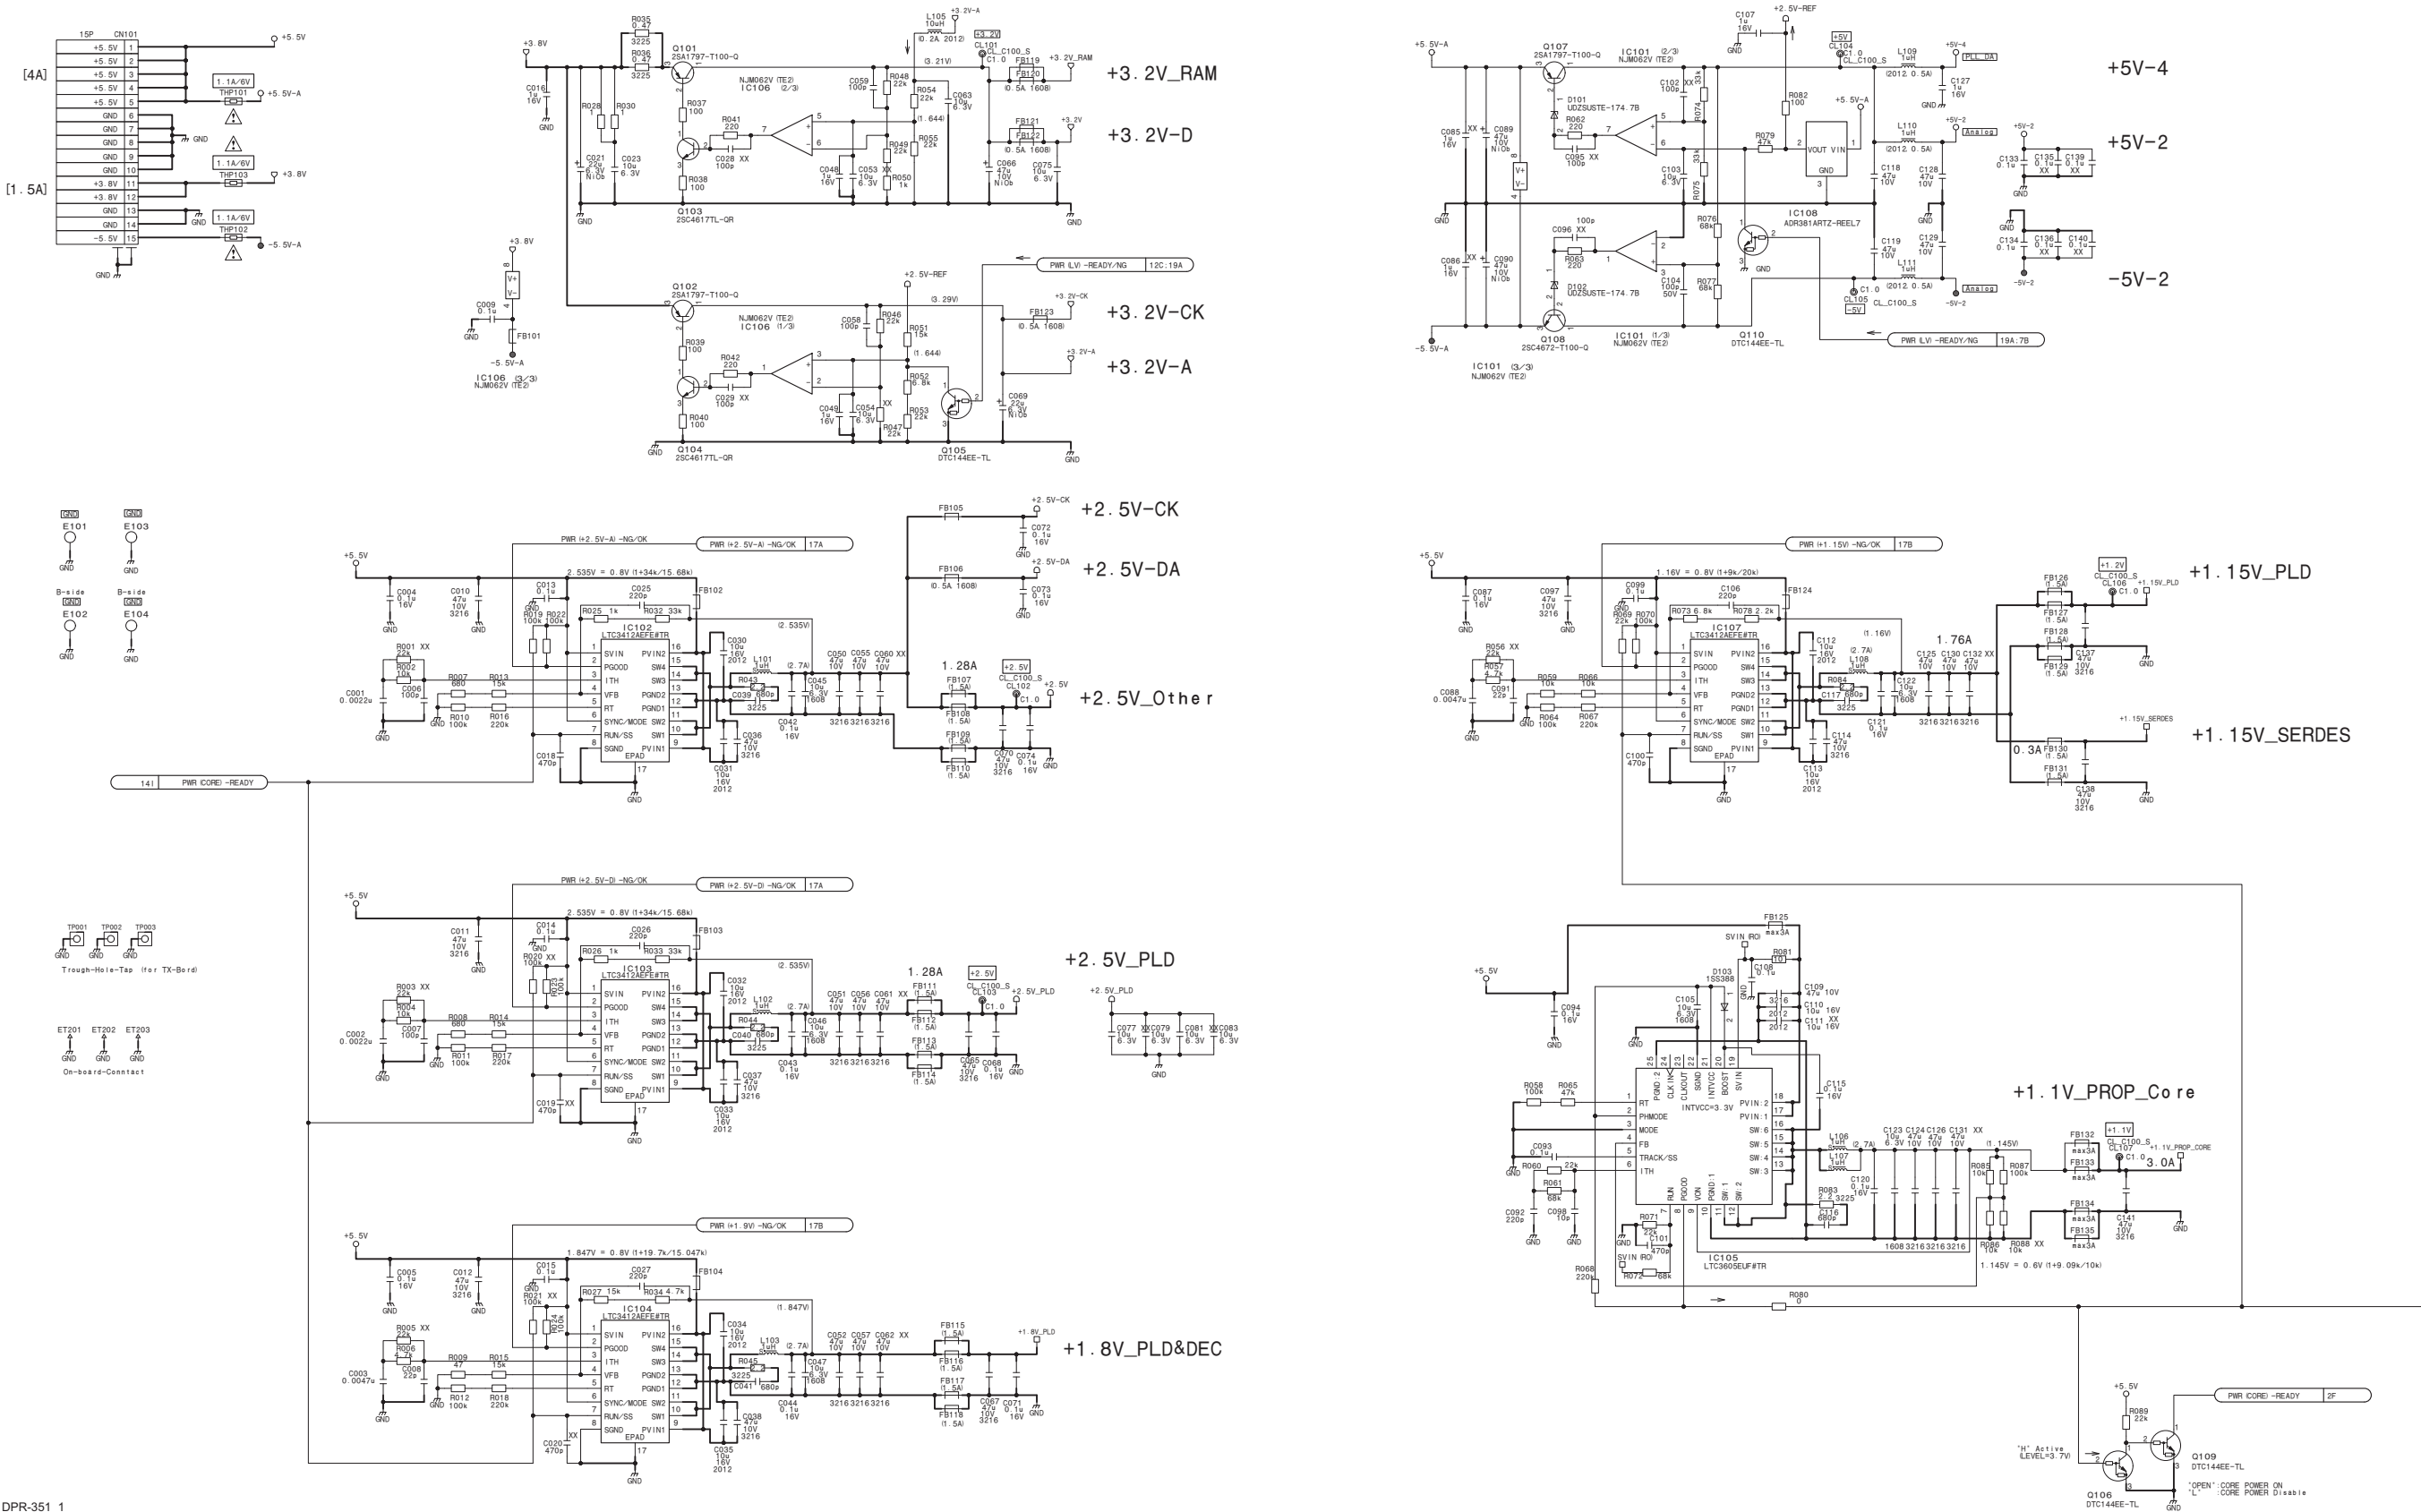


DPR-351_1

CA4000

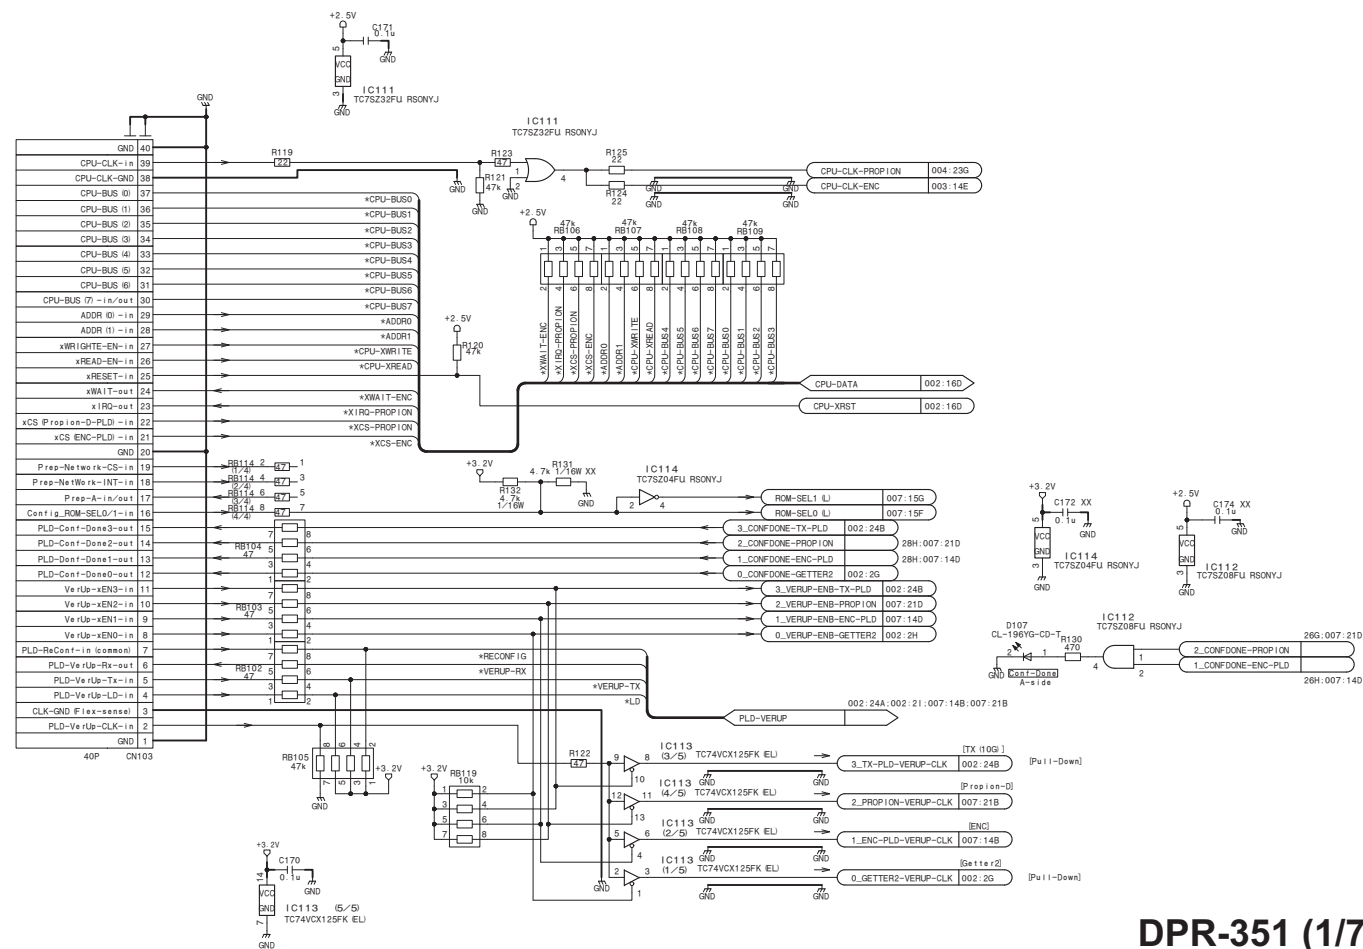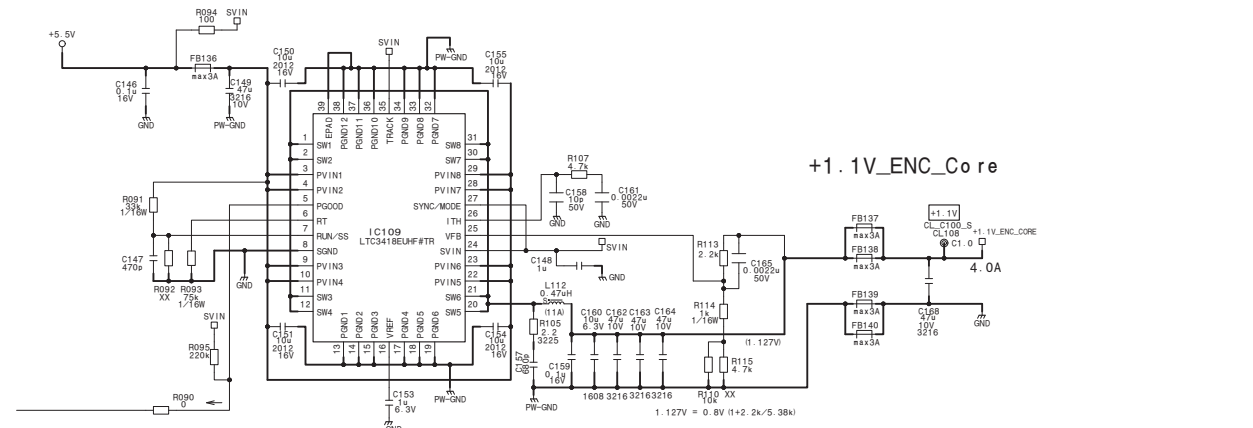

2-9

DPR-351 (2/7)_L

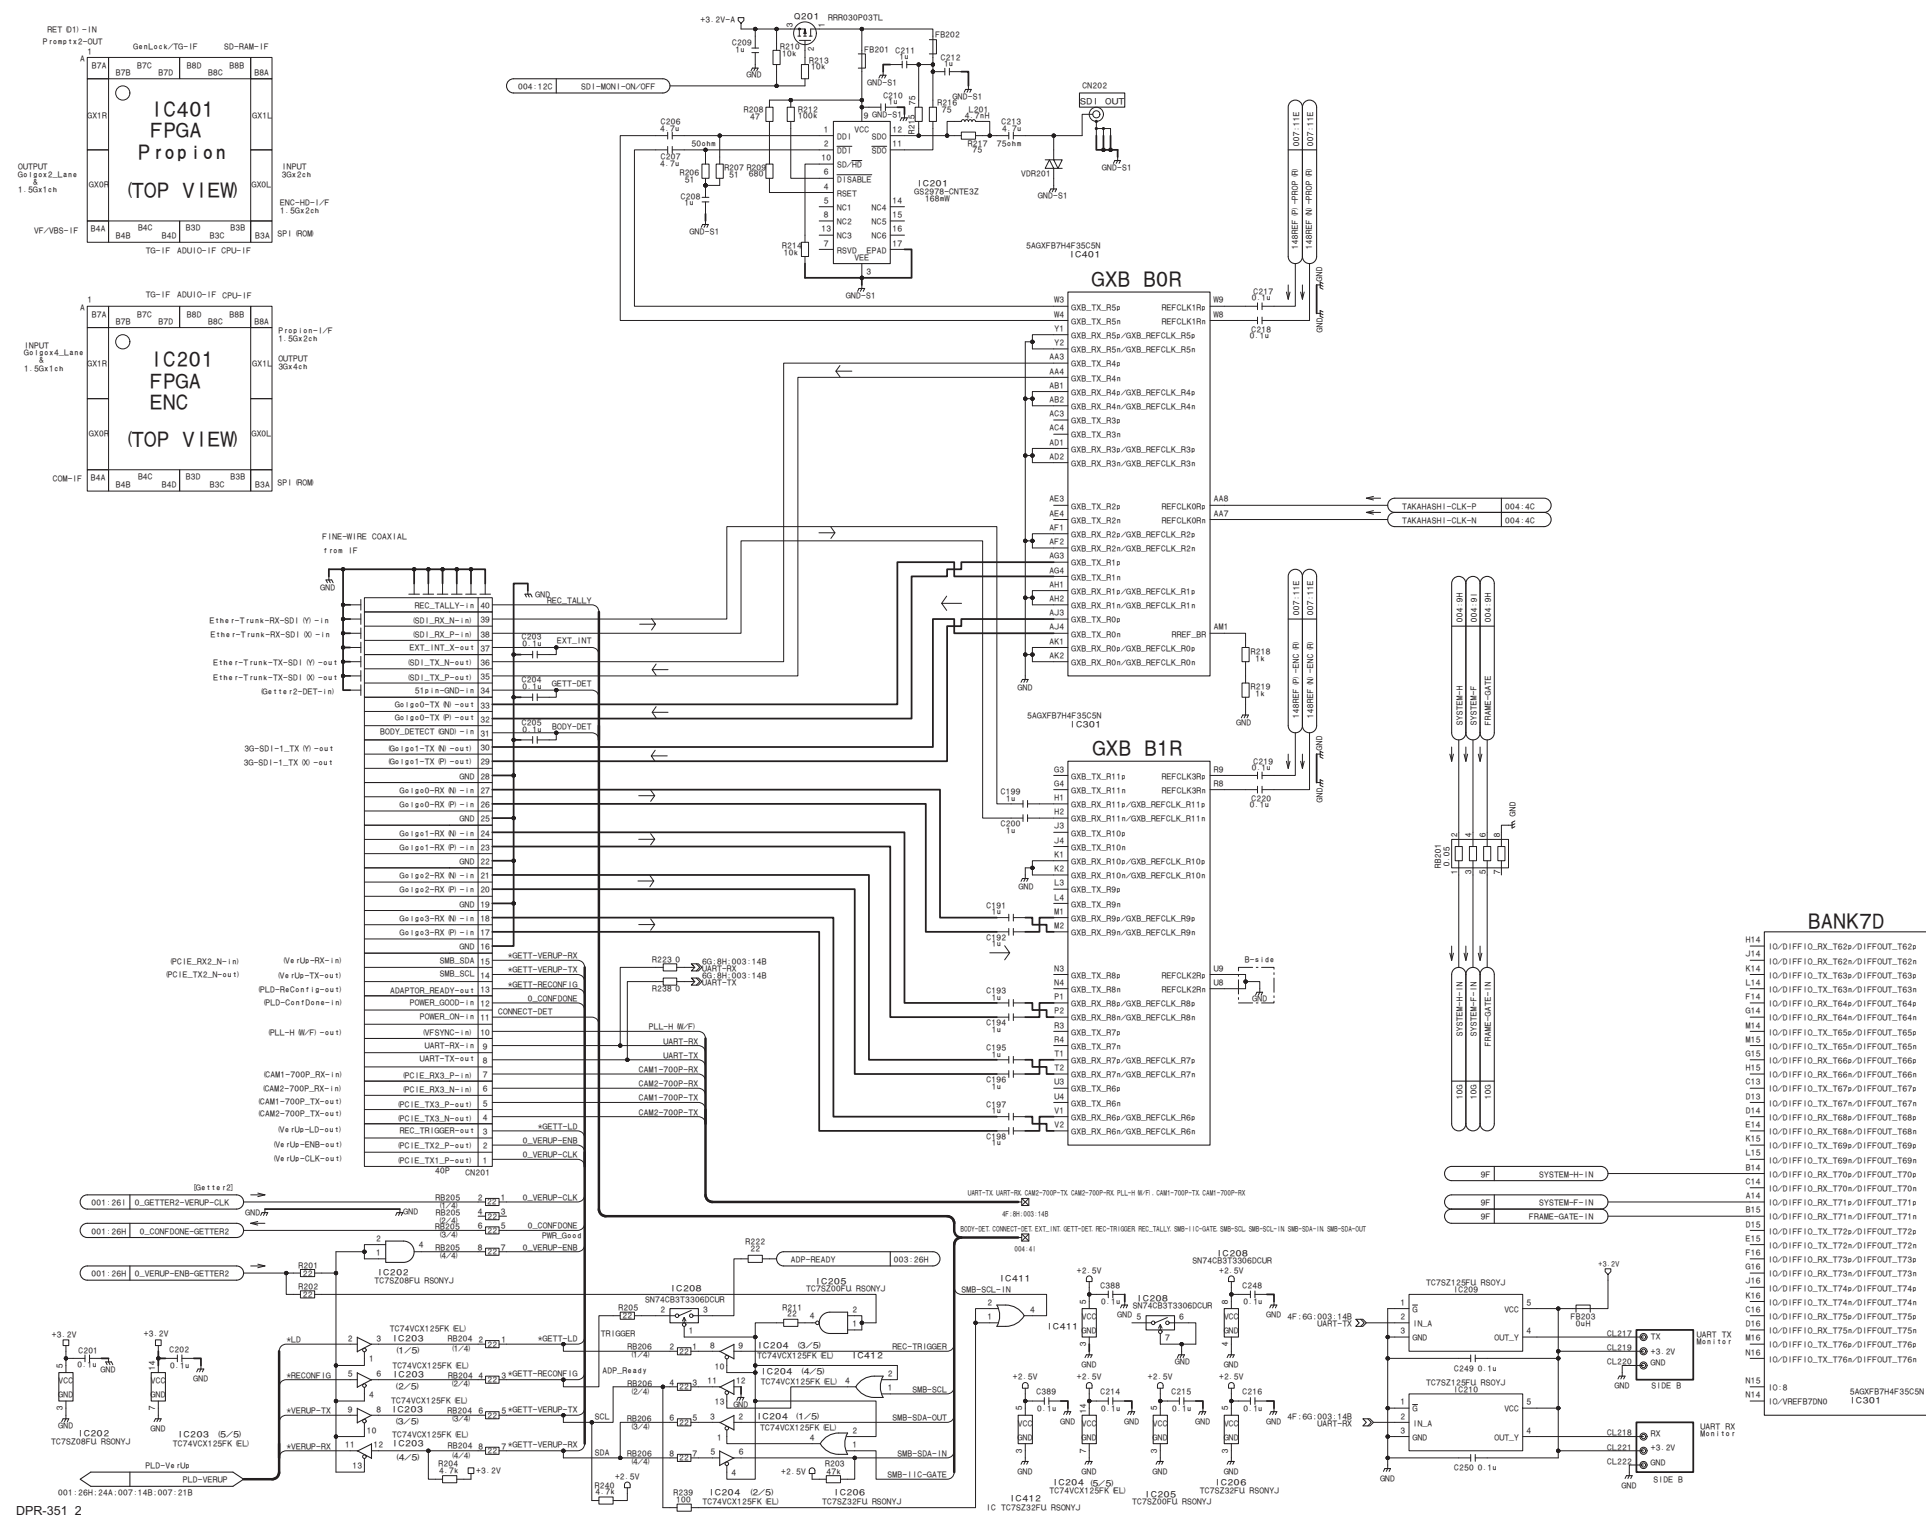





2-11



ENC (LLVC) (PLD)










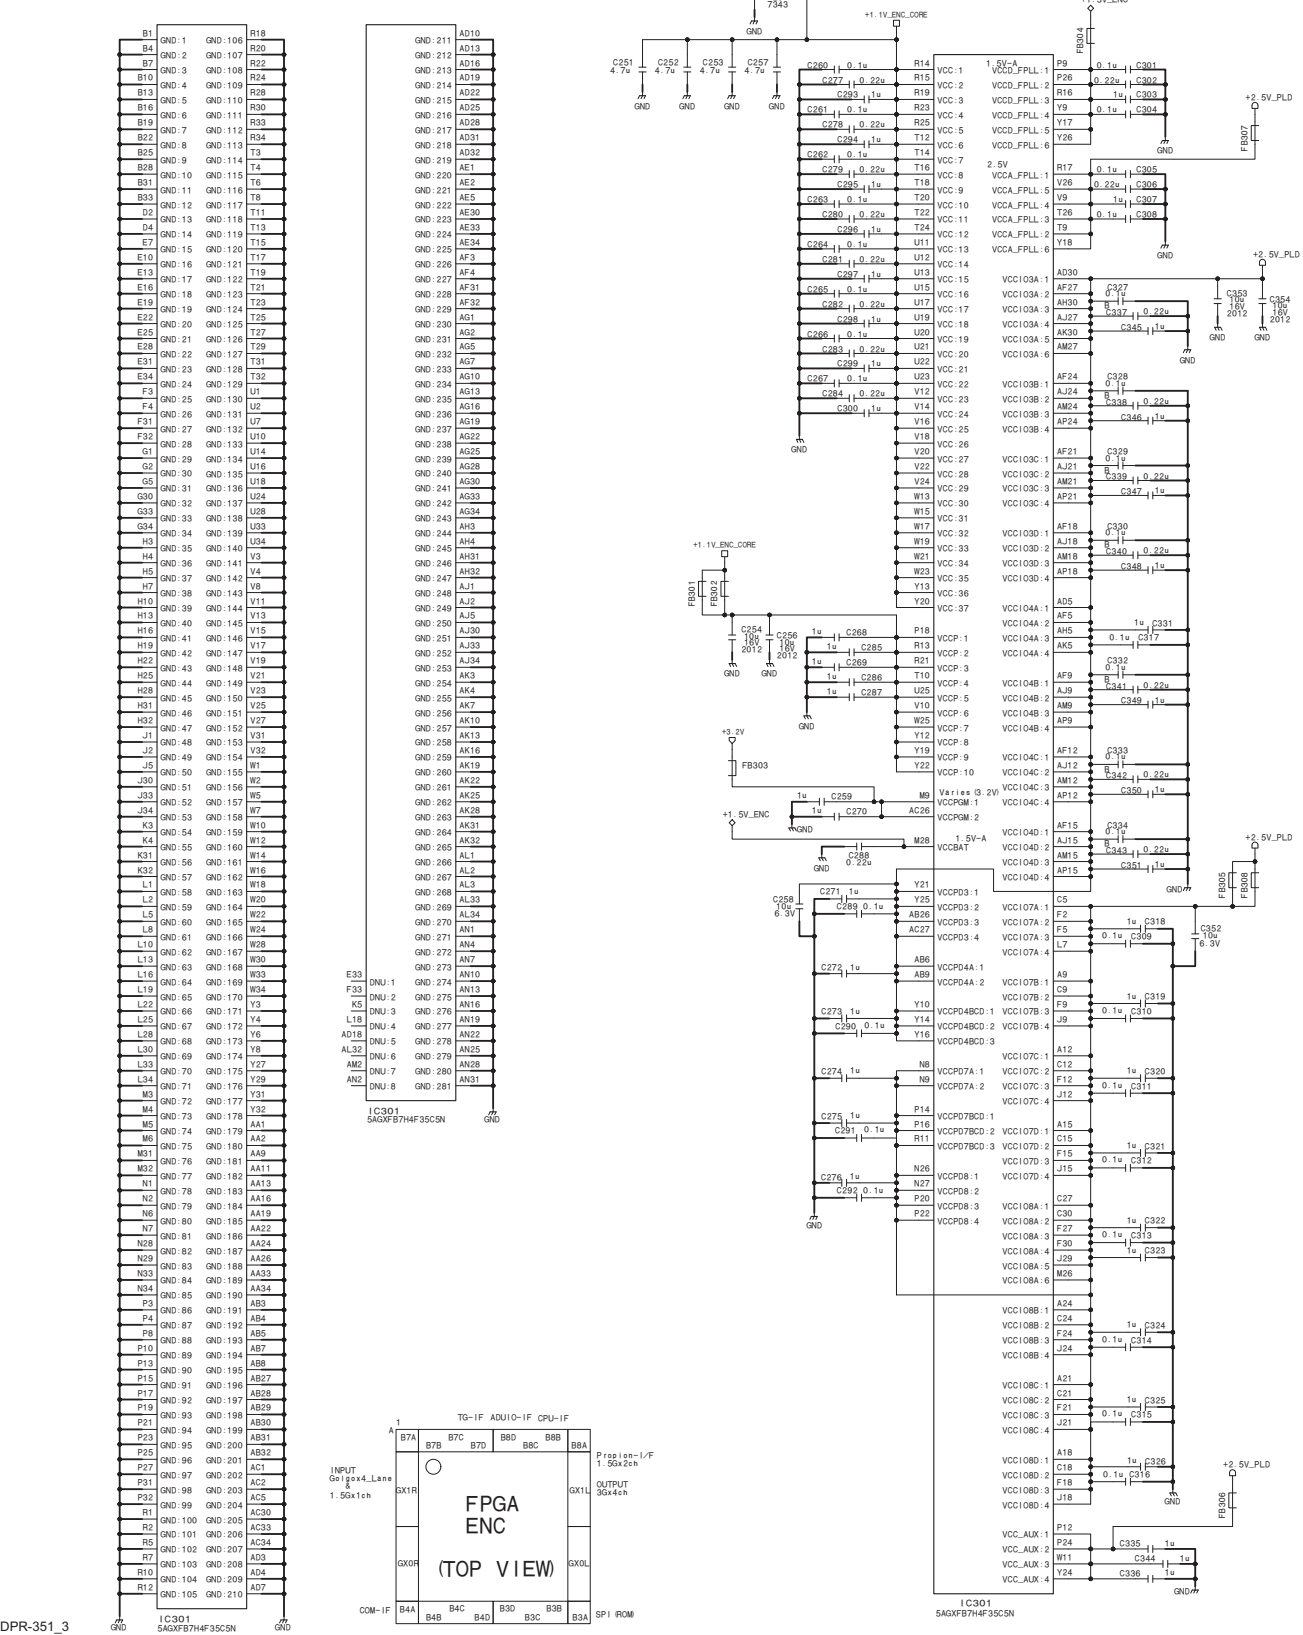


DPR-351_3

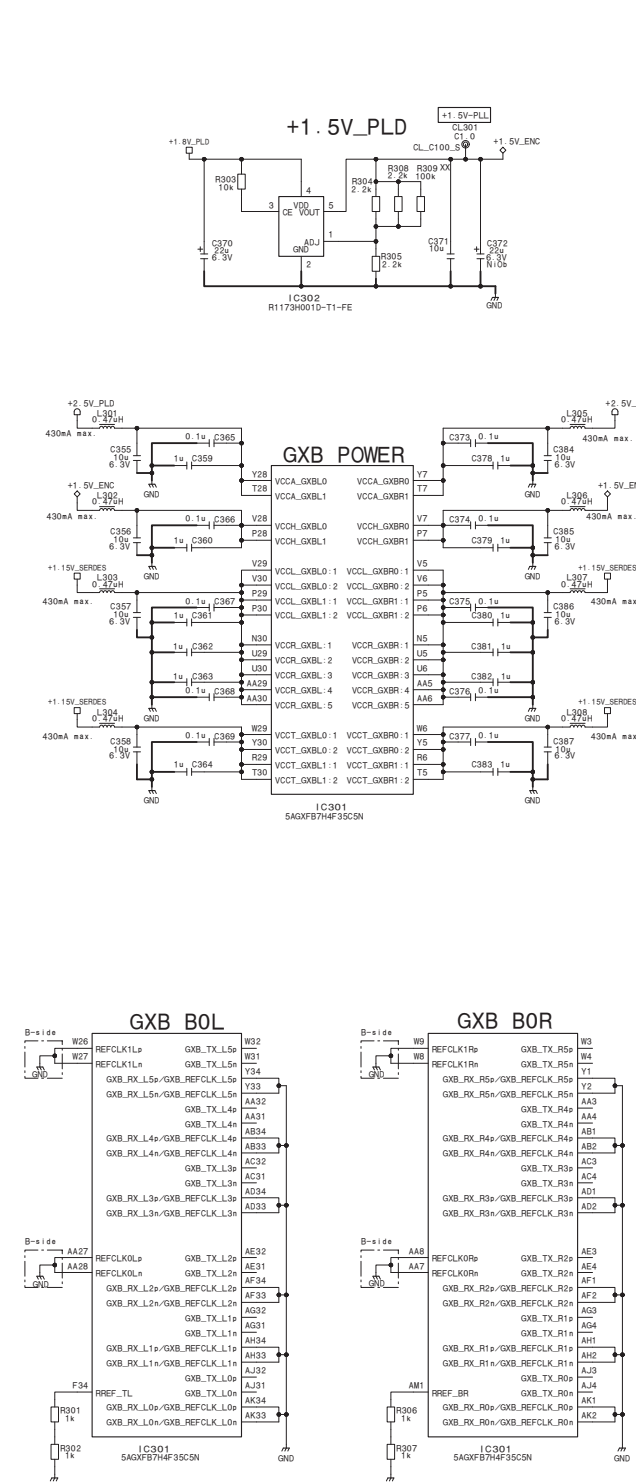

DPR-351_3


DPR-351 (3/7)_R

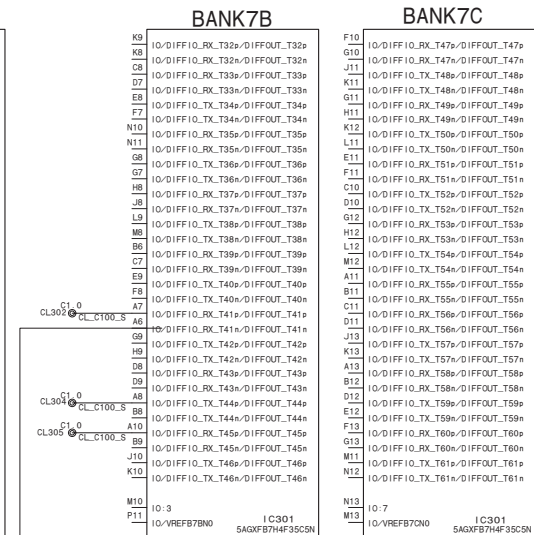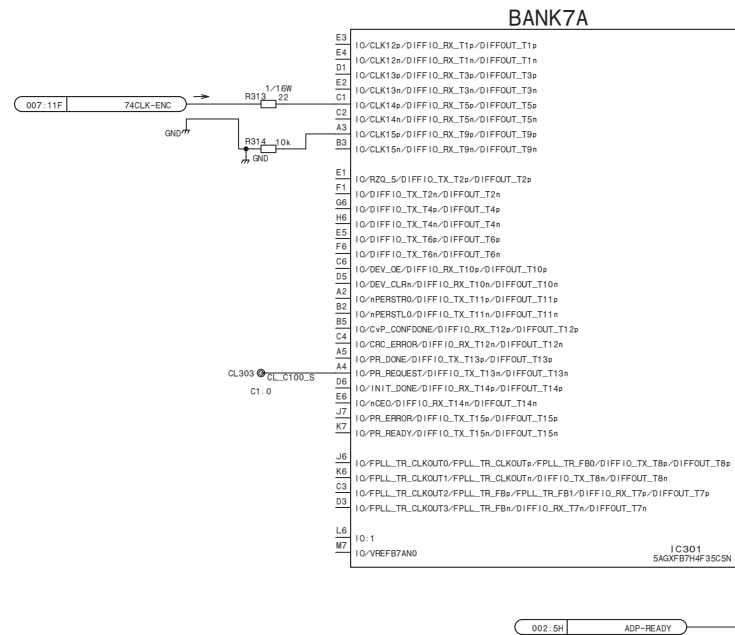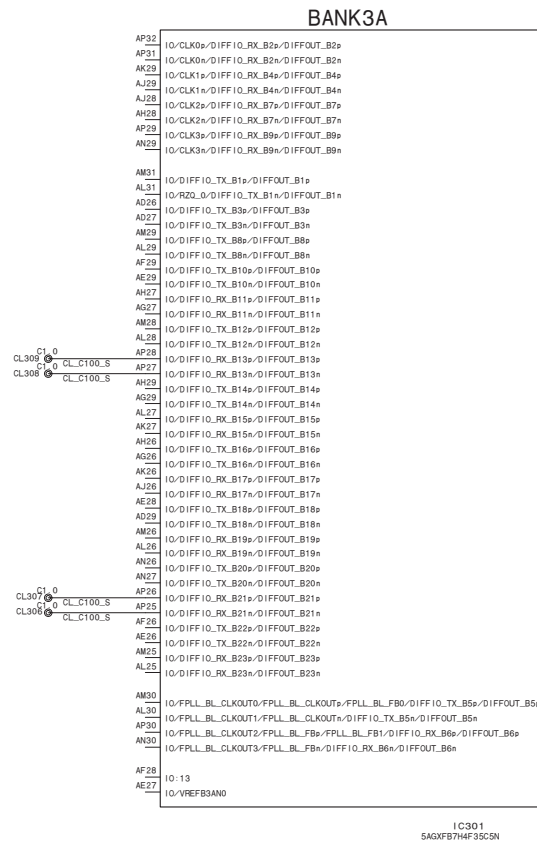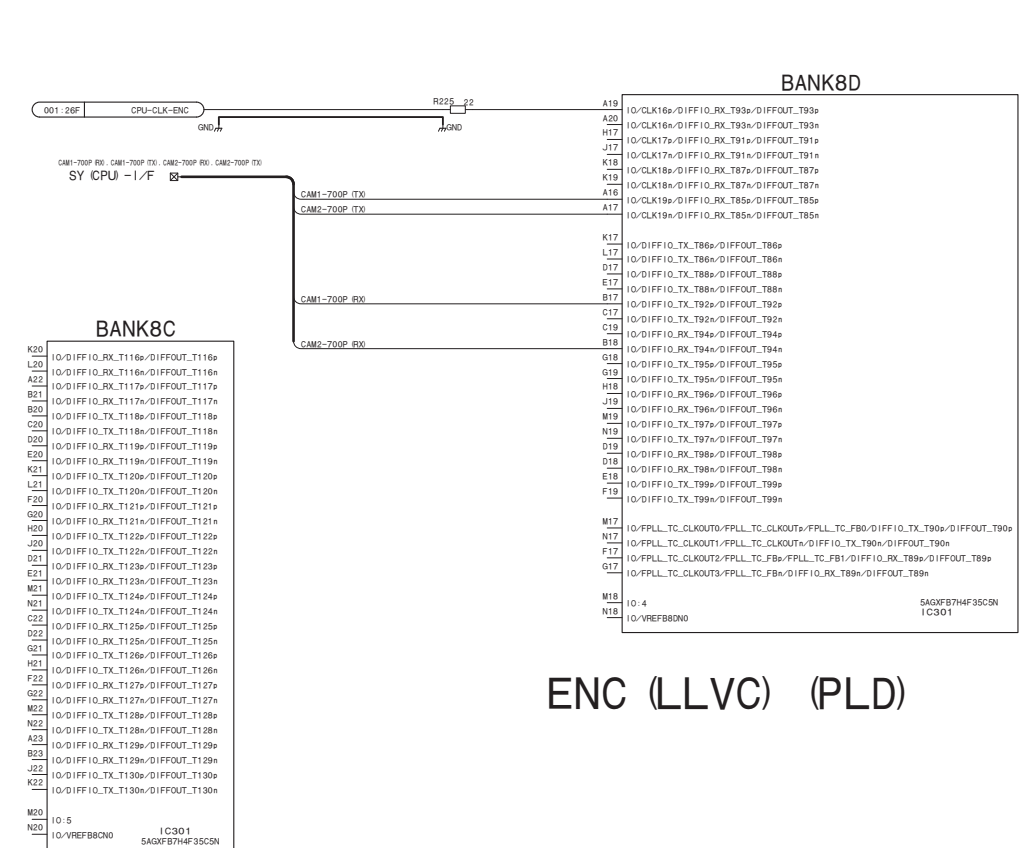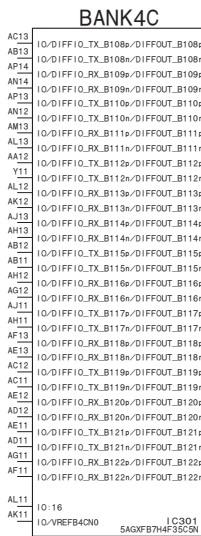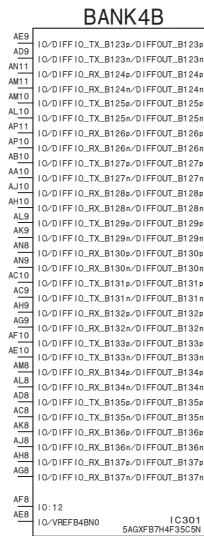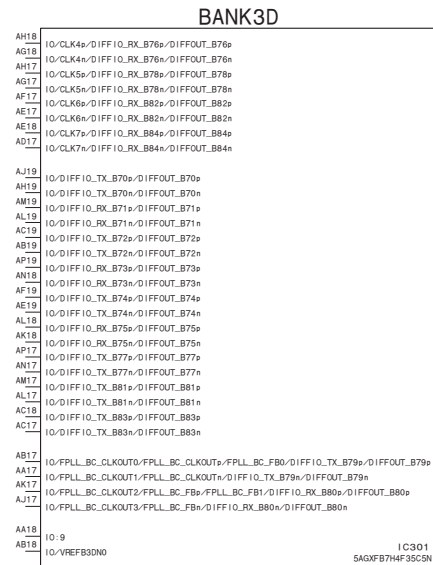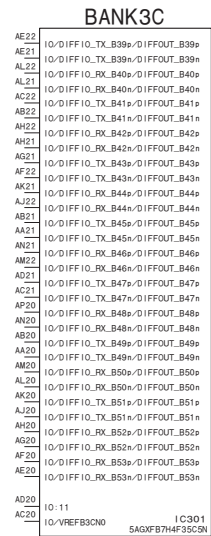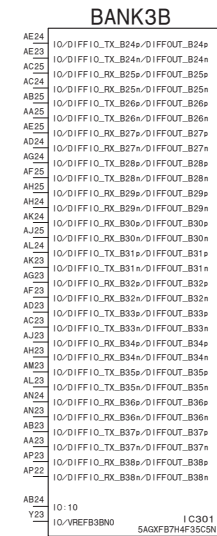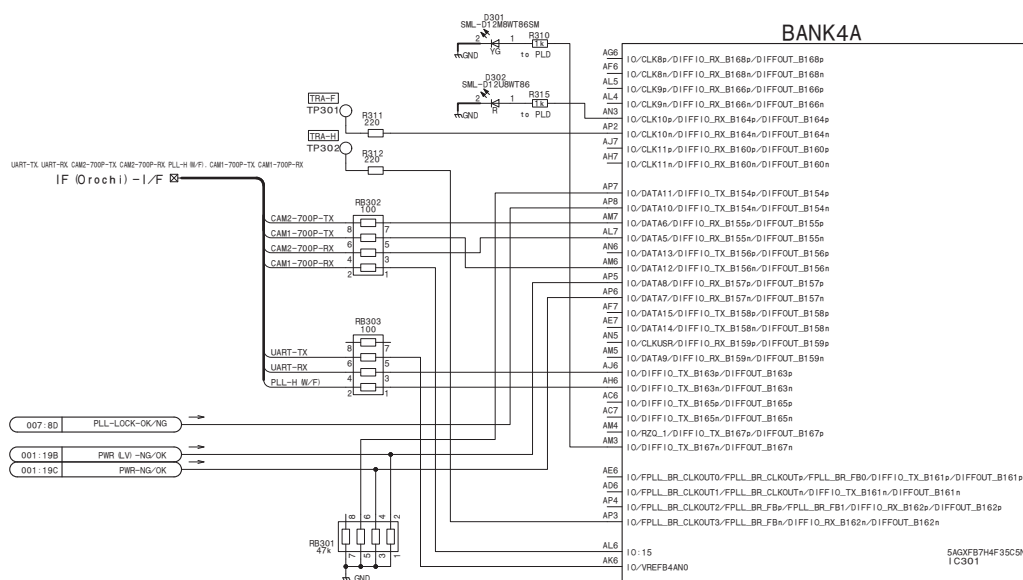


ENC (LLVC) (PLD)

DPR-351 (3/7)
BOARD NO. 1-889-920-11
DPR-351_3



DPR-351 (4/7)_L

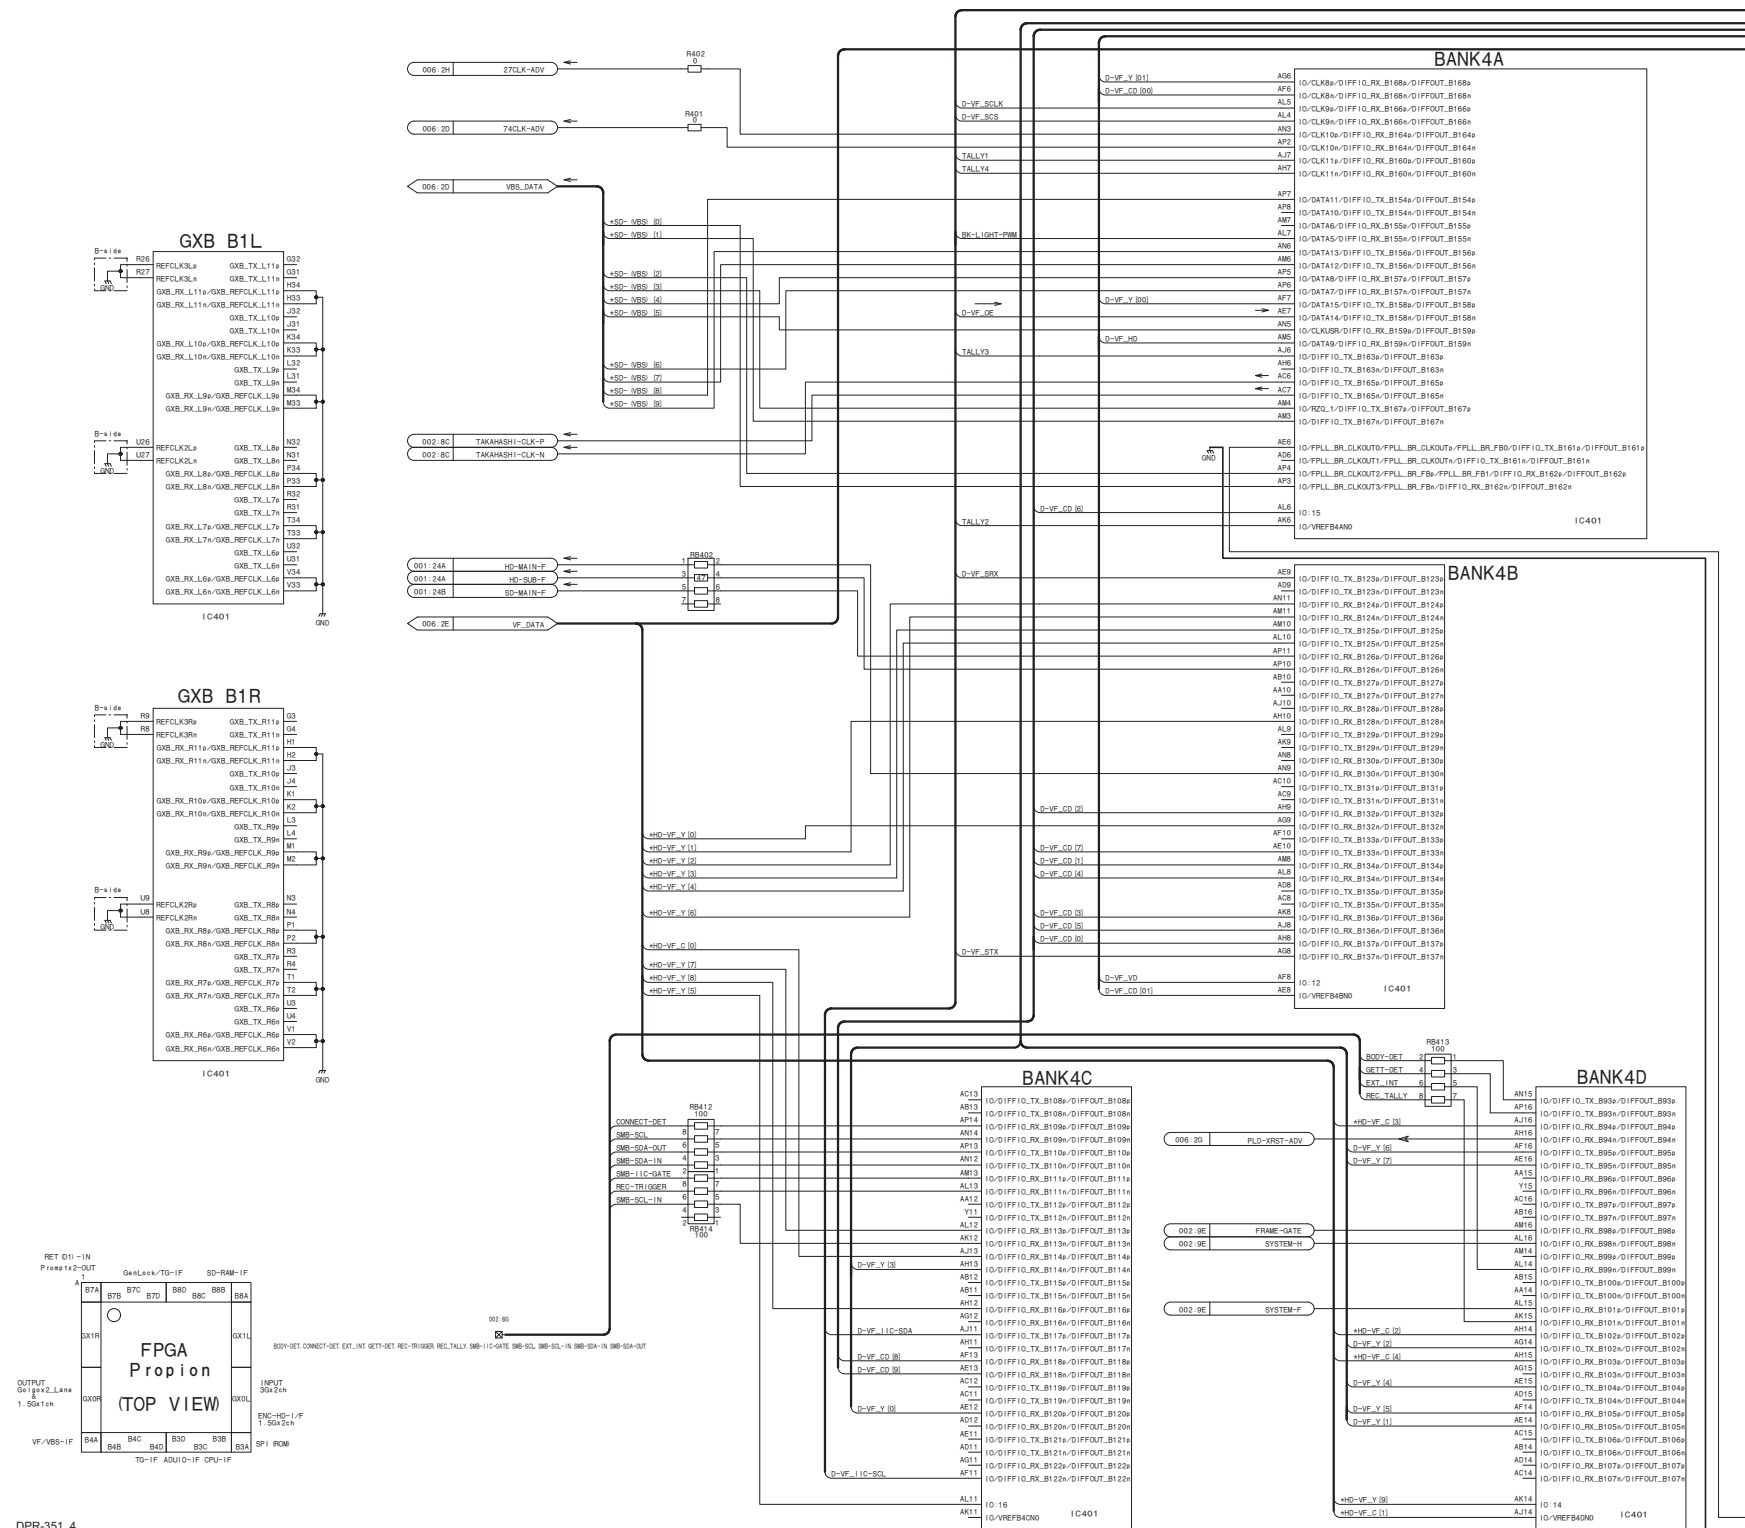


DPR-351 (4/7)_R

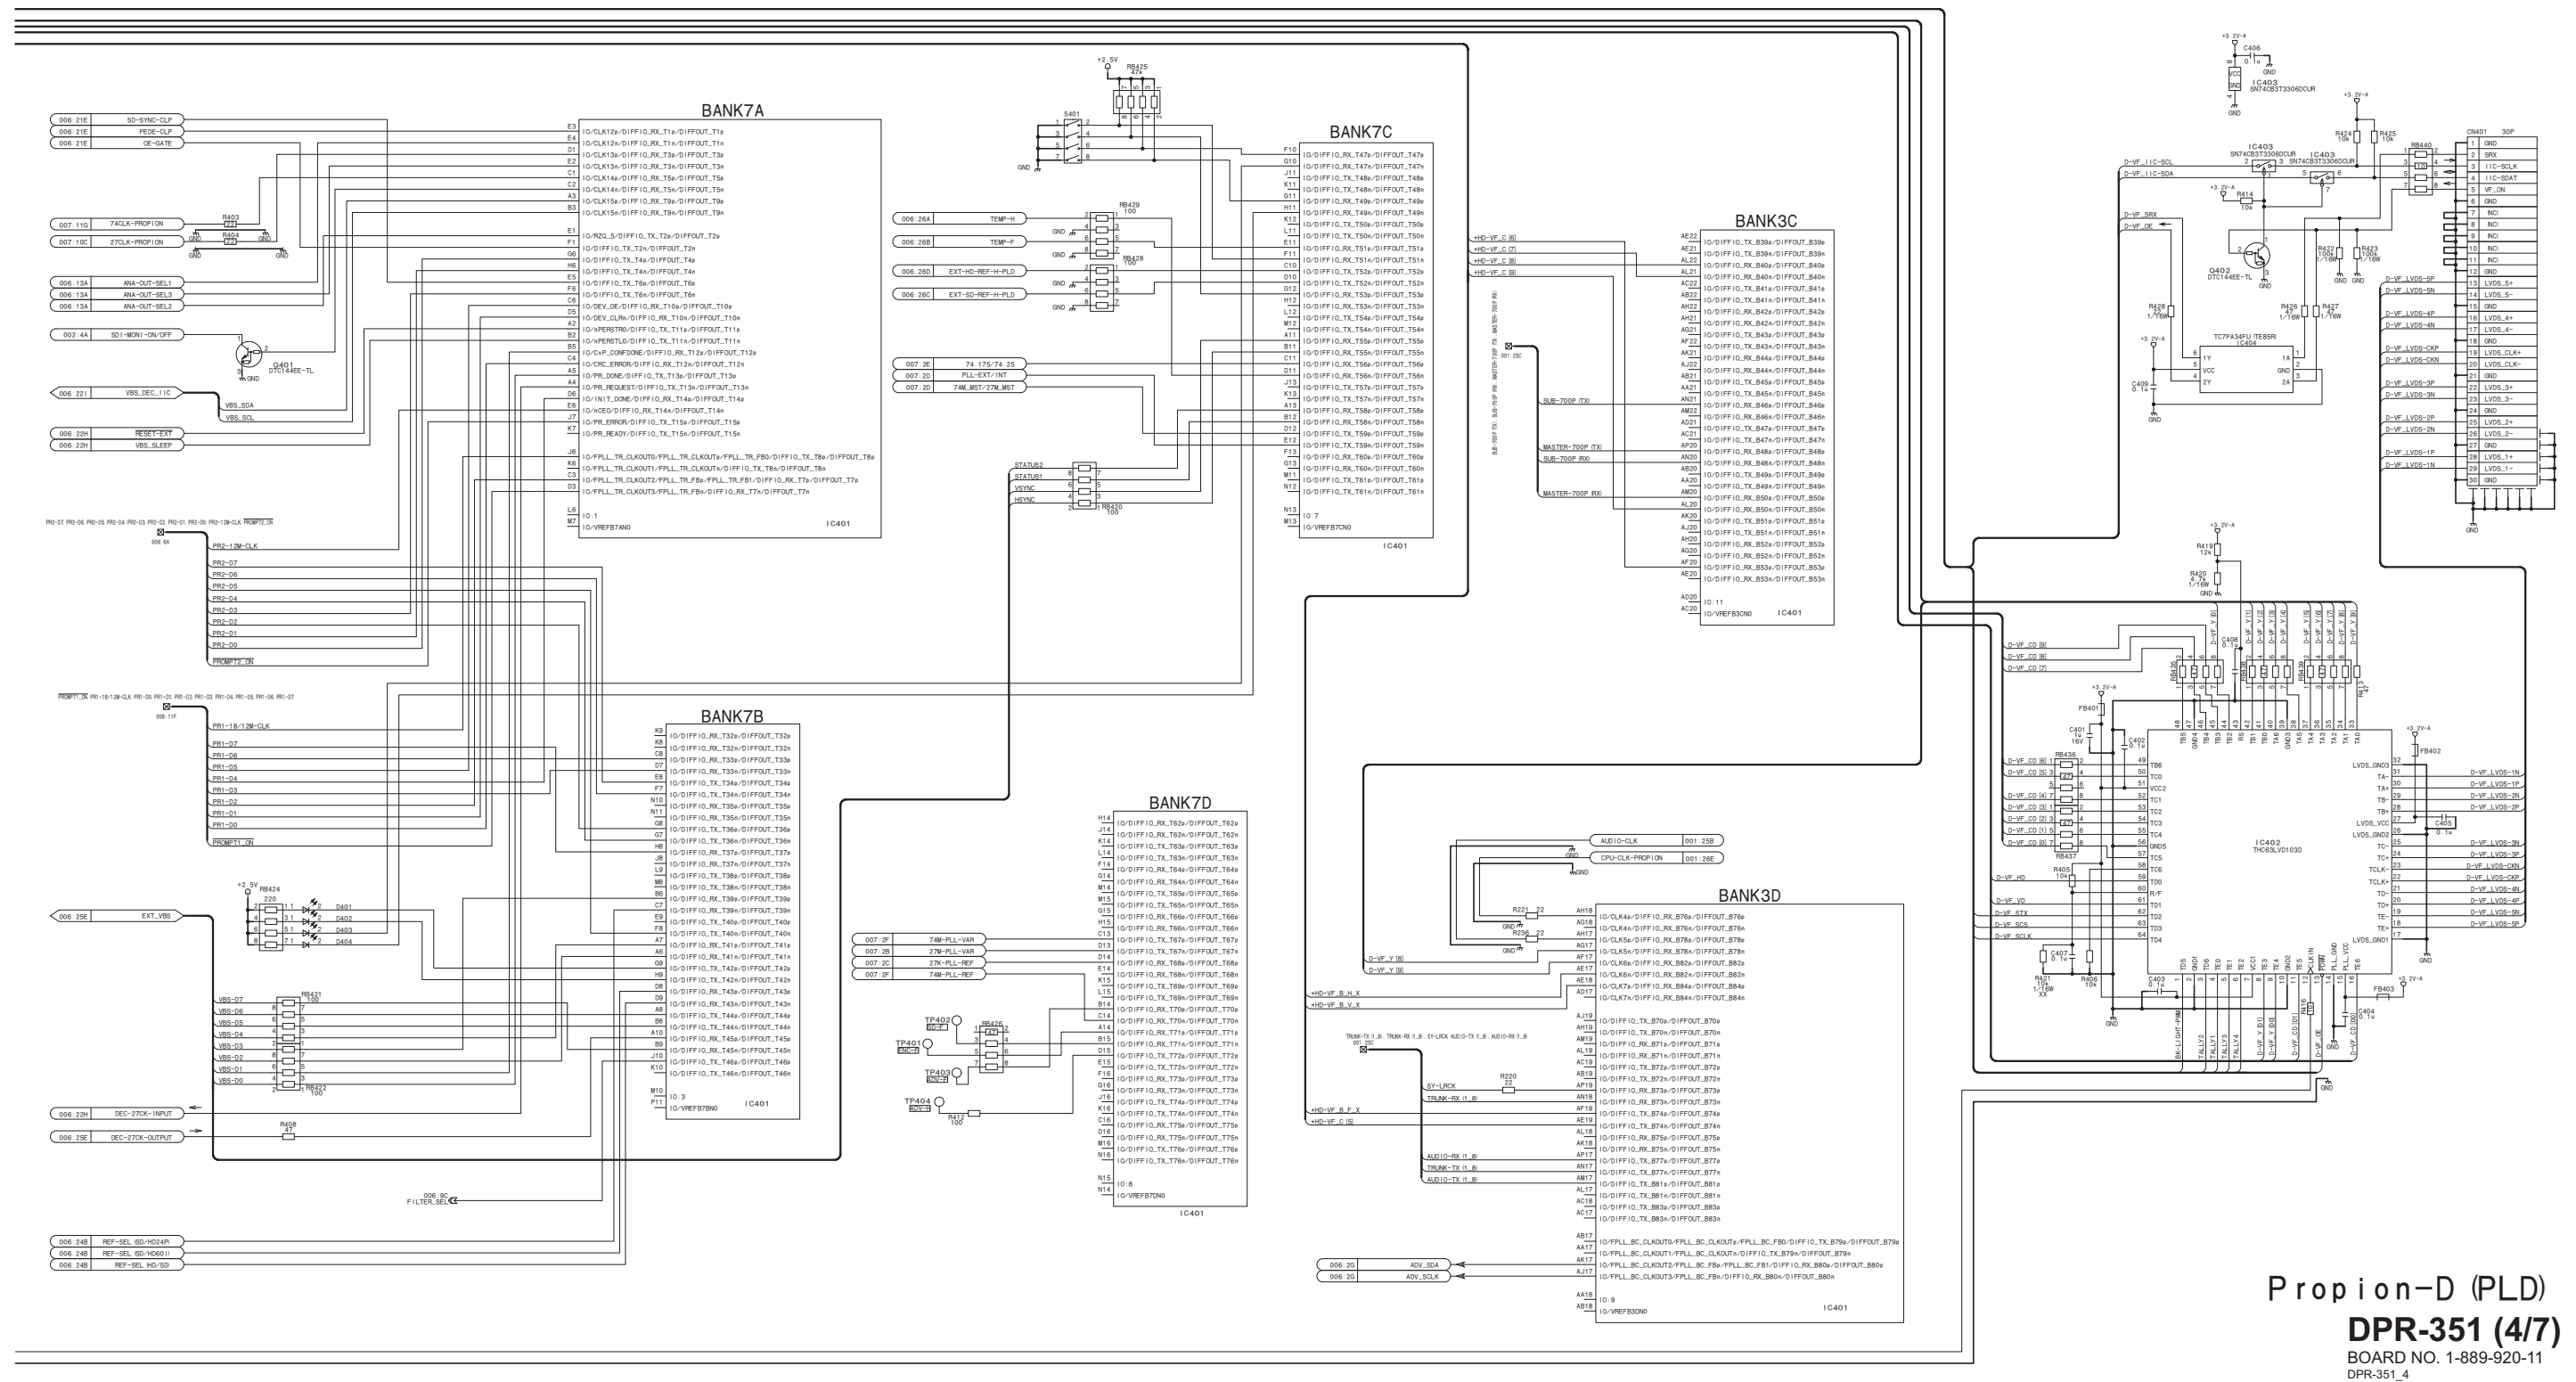


DPR-351 (5/7)_L

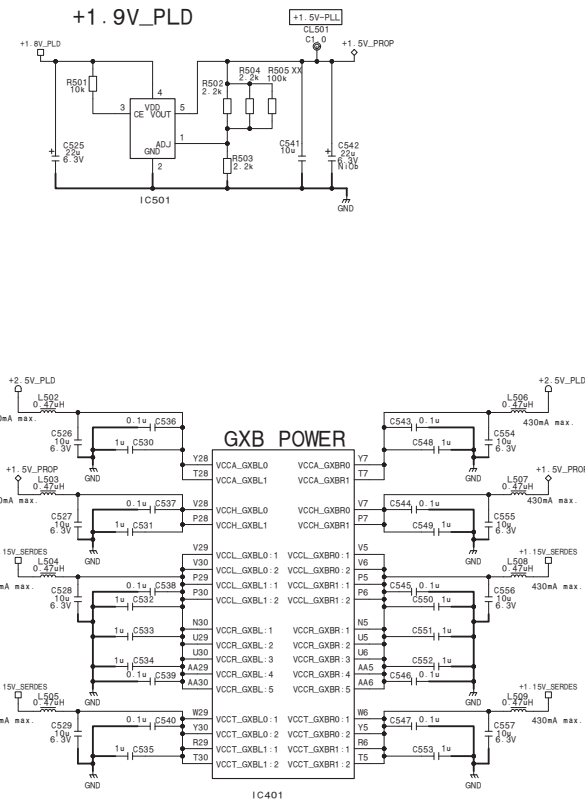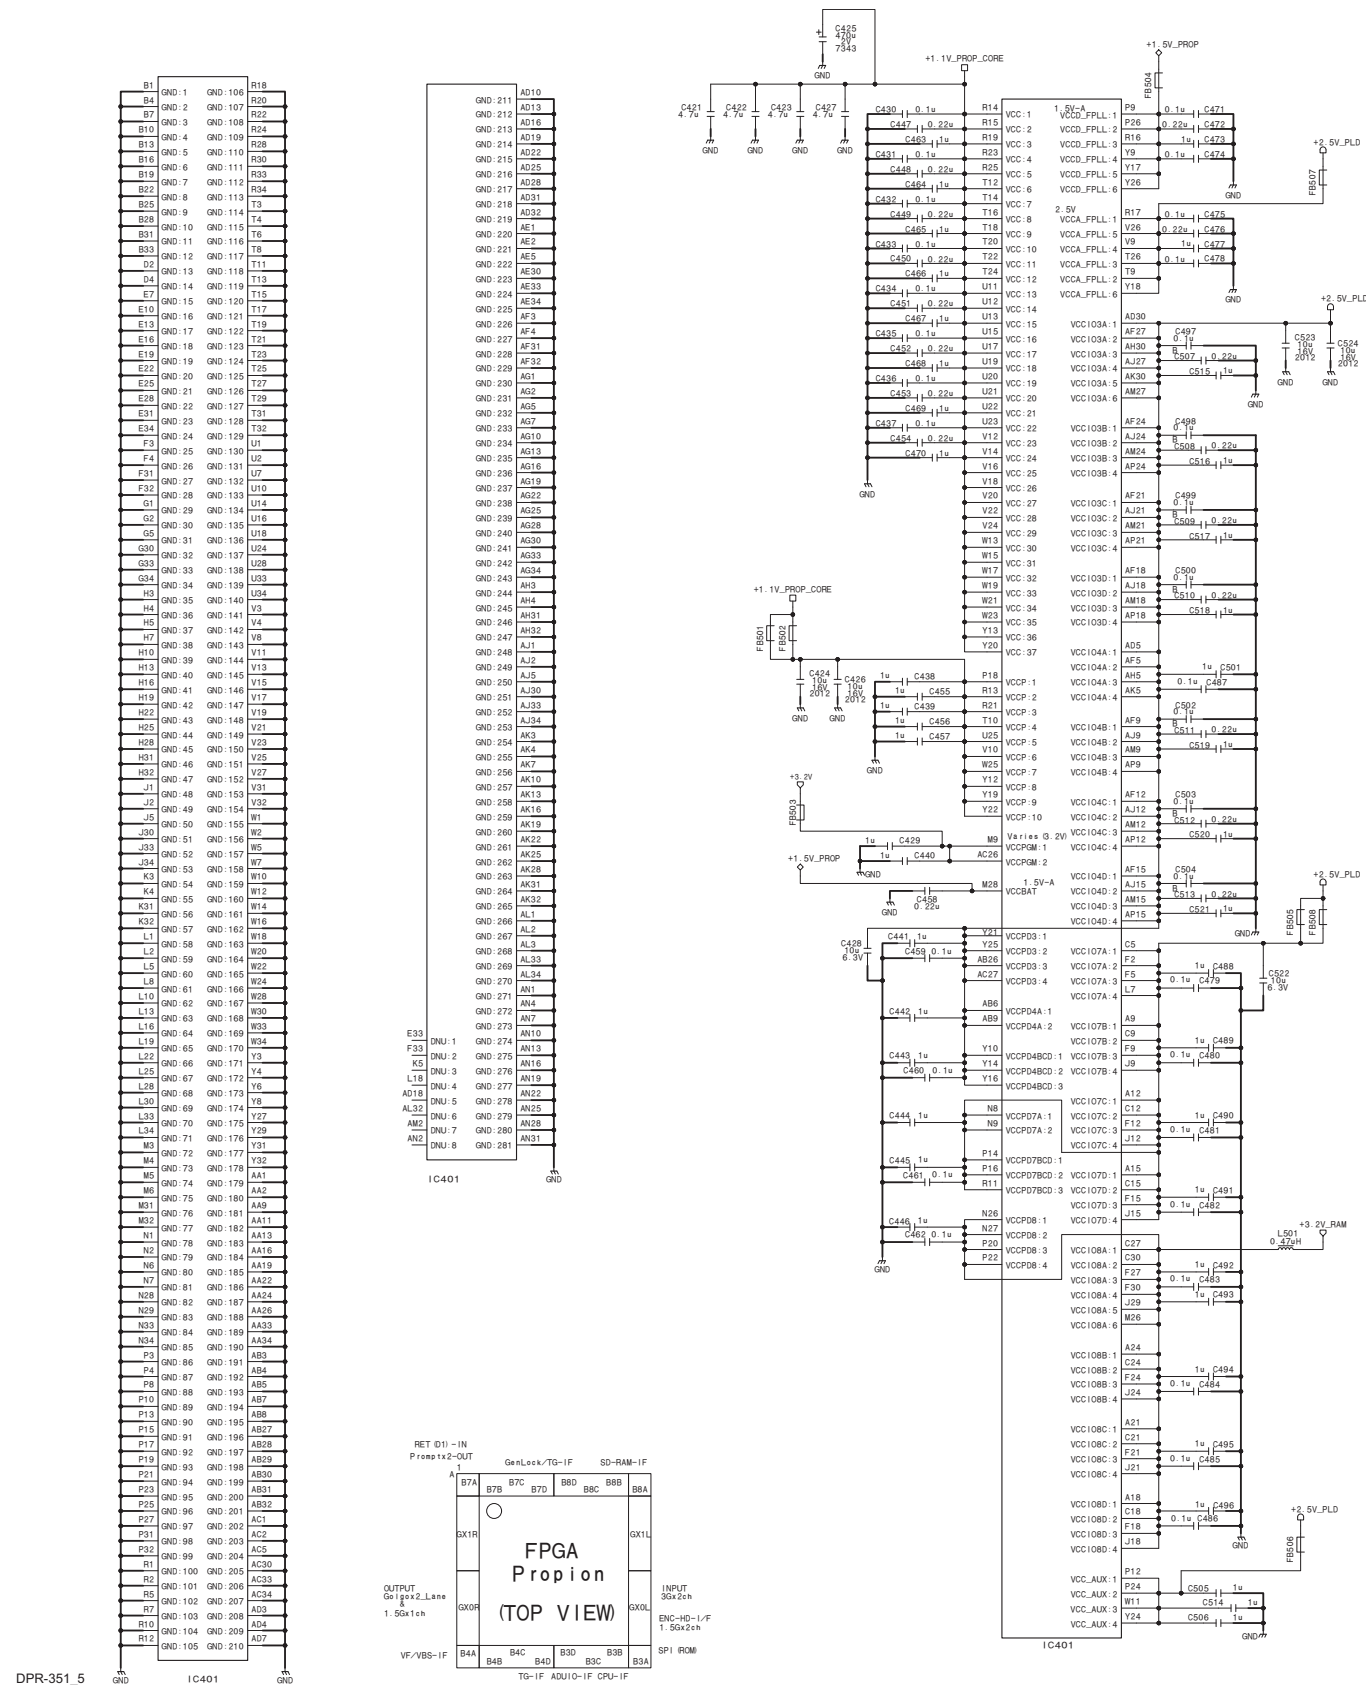

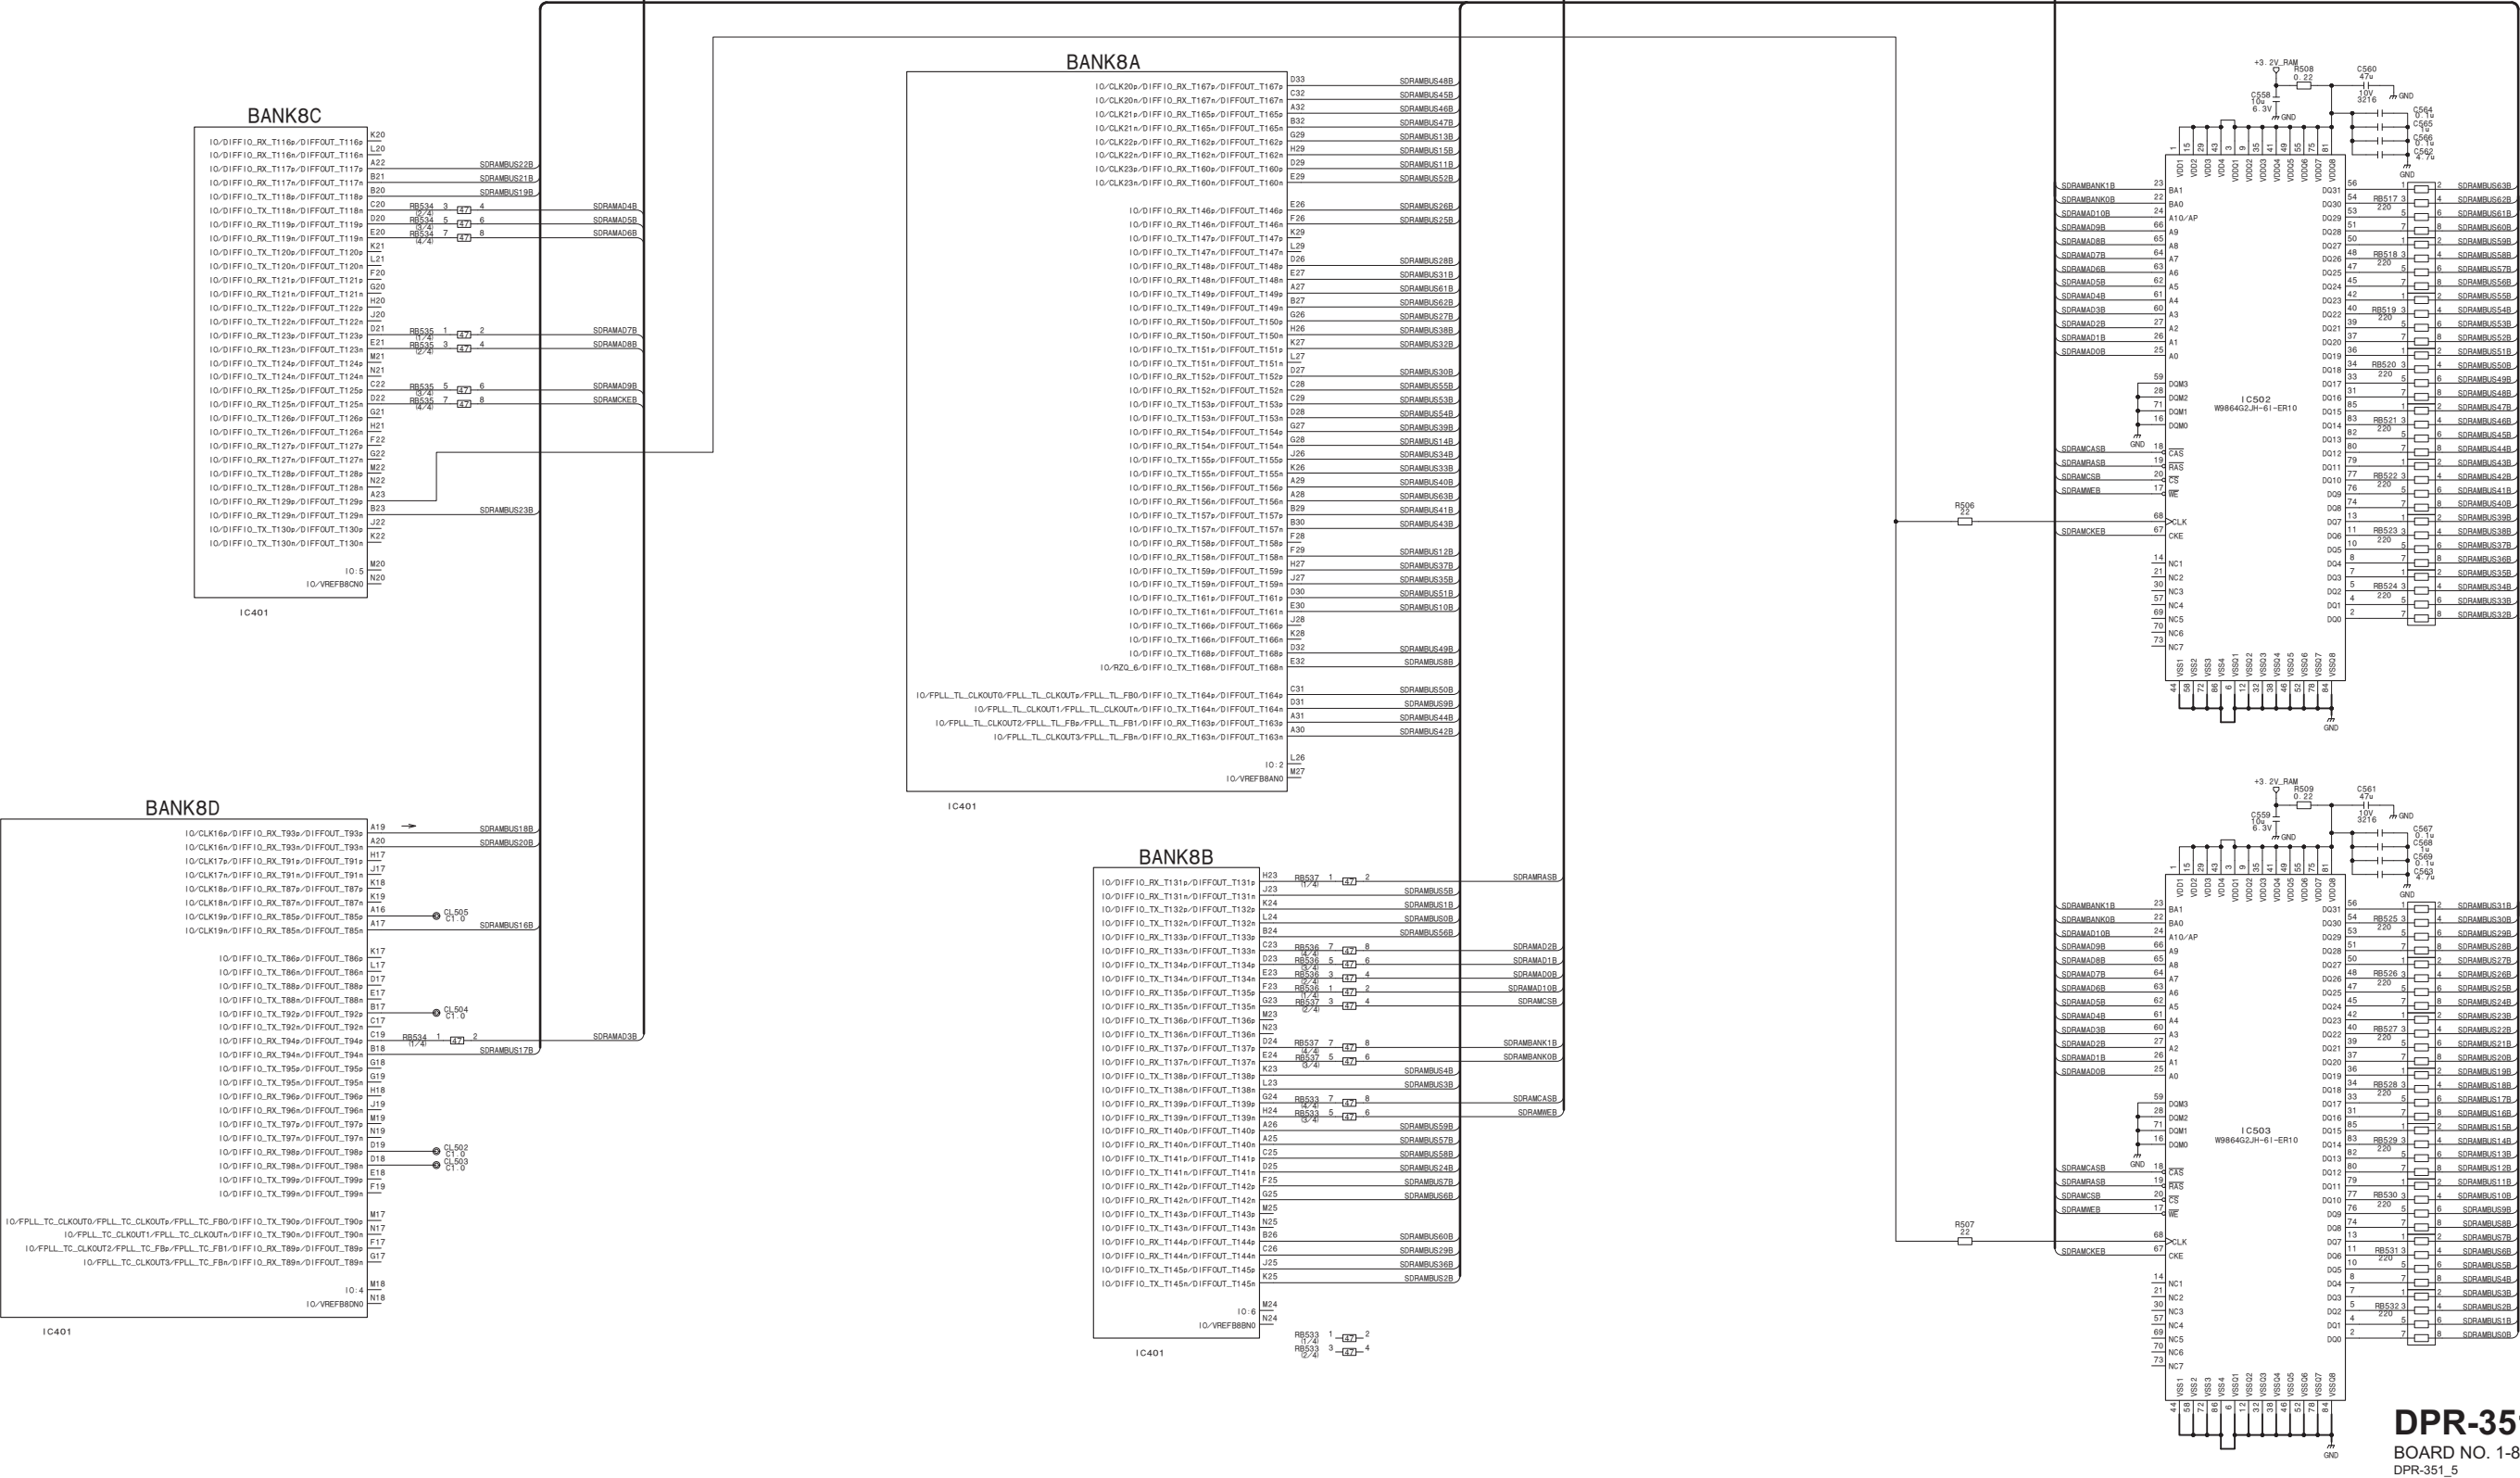


DPR-351 (6/7)_L

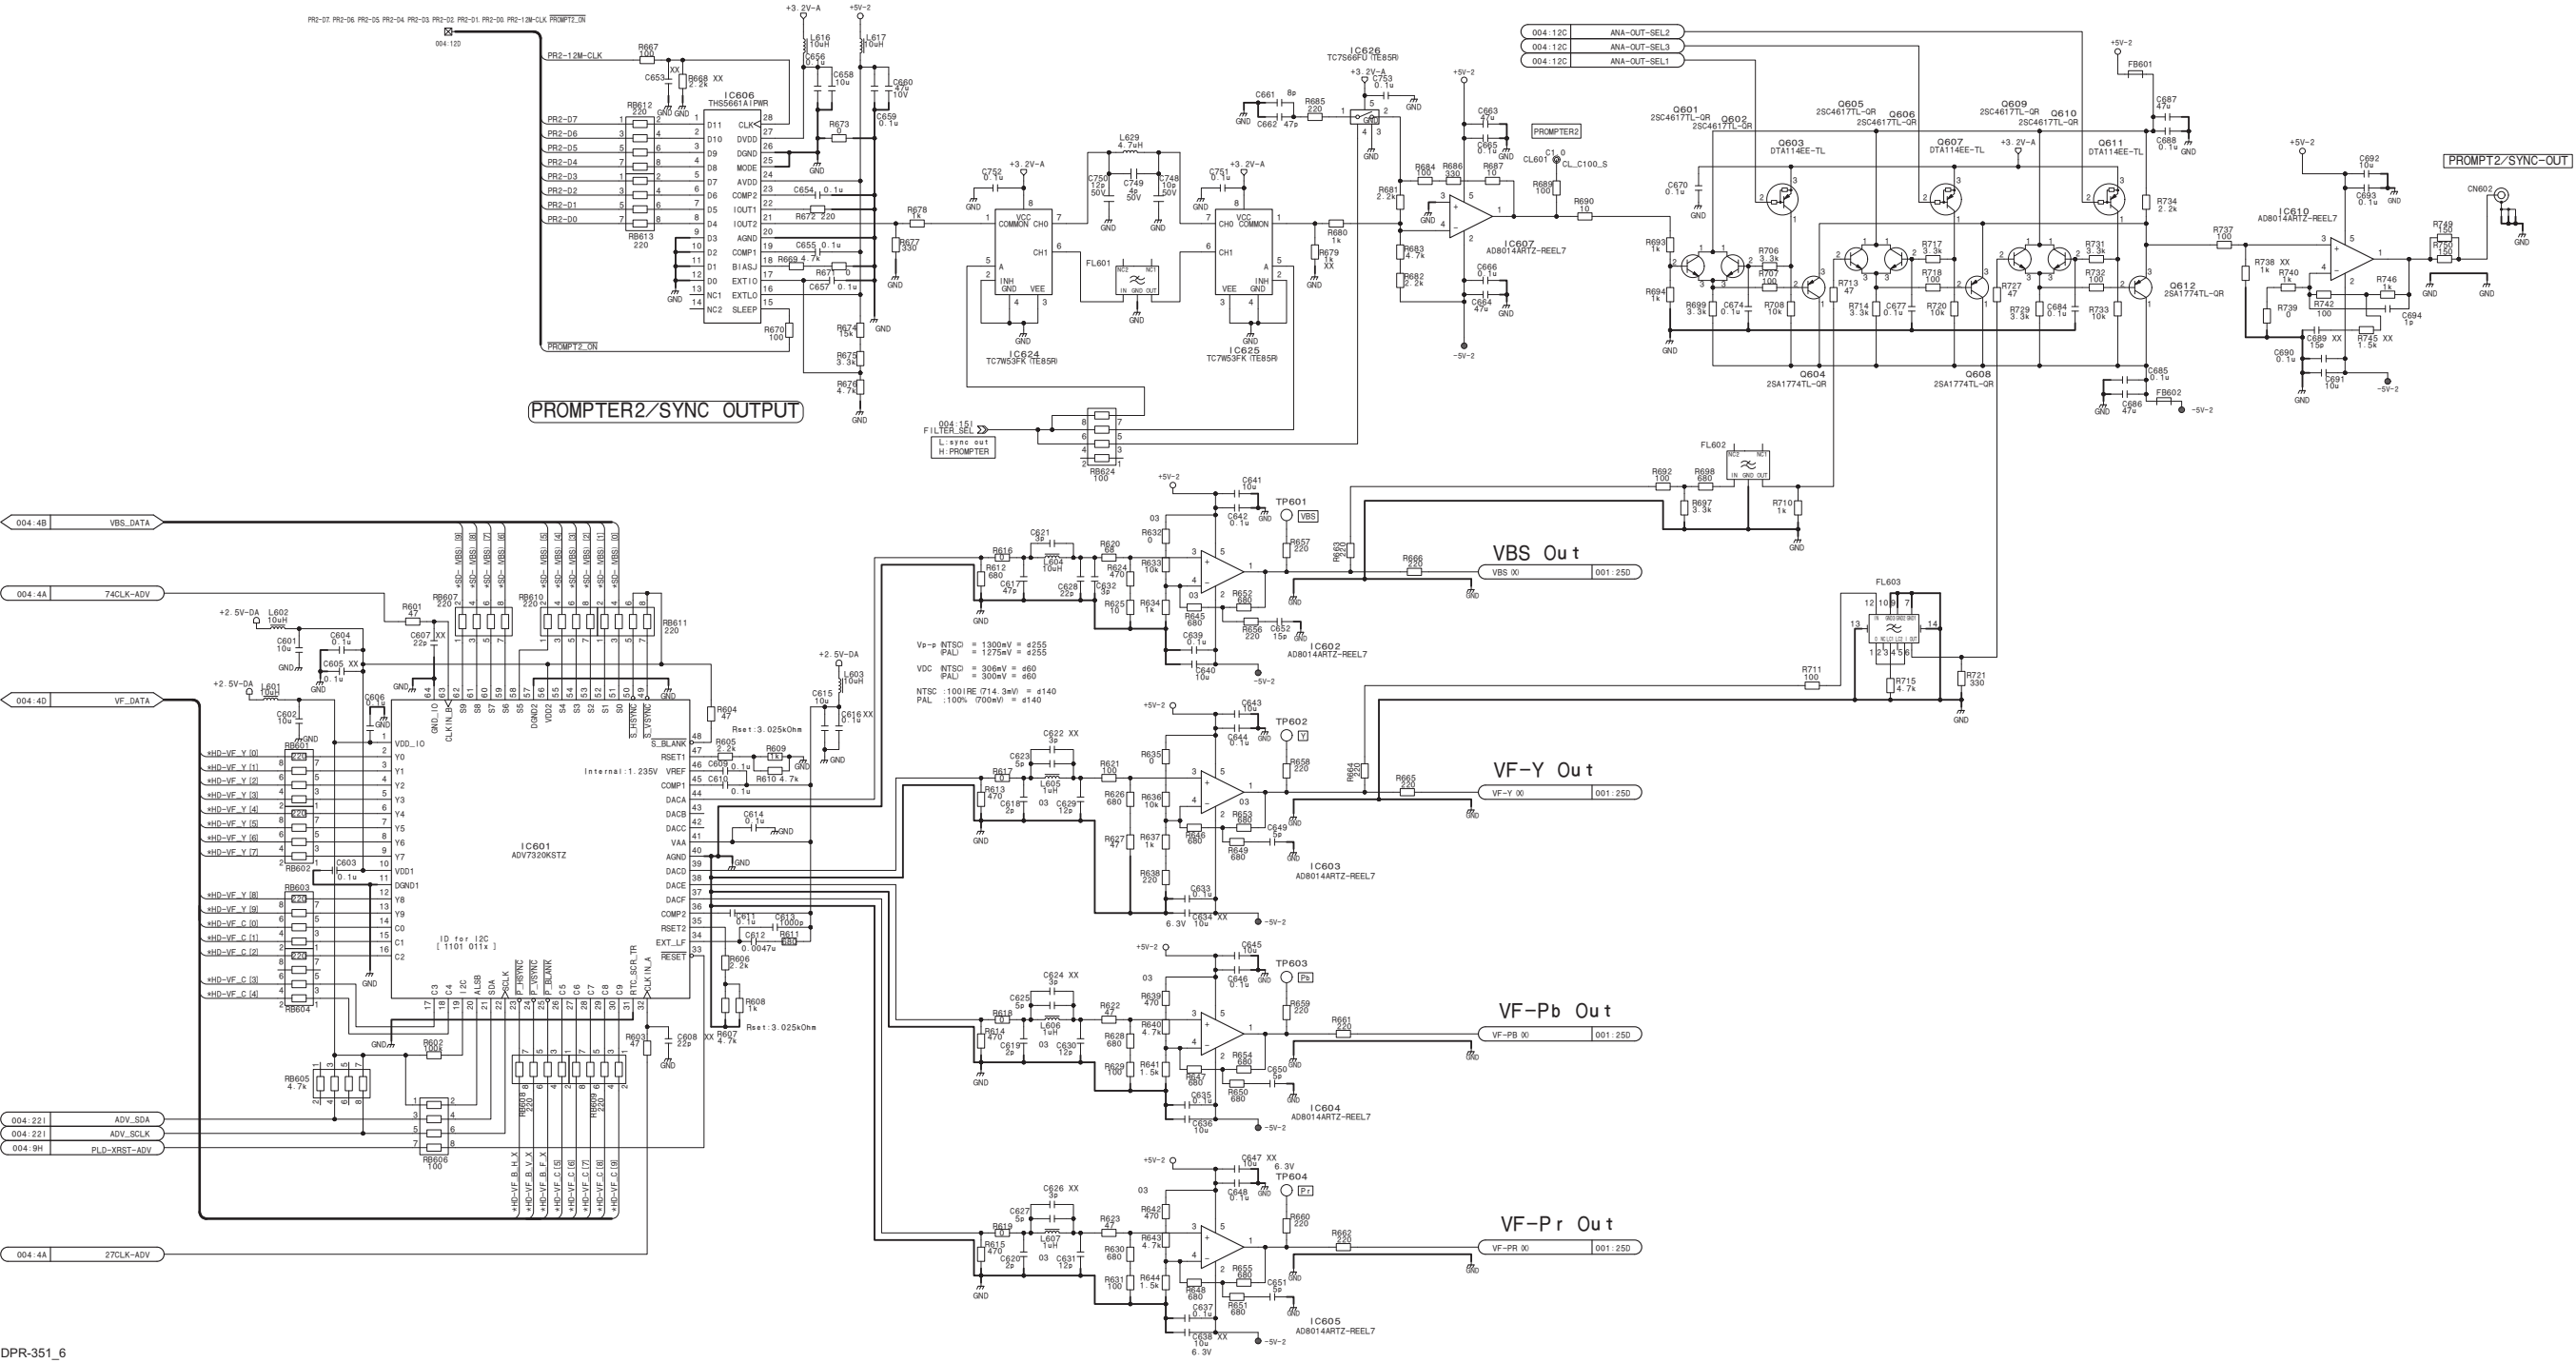




DPR-351_6

DPR-351 (6/7)_R

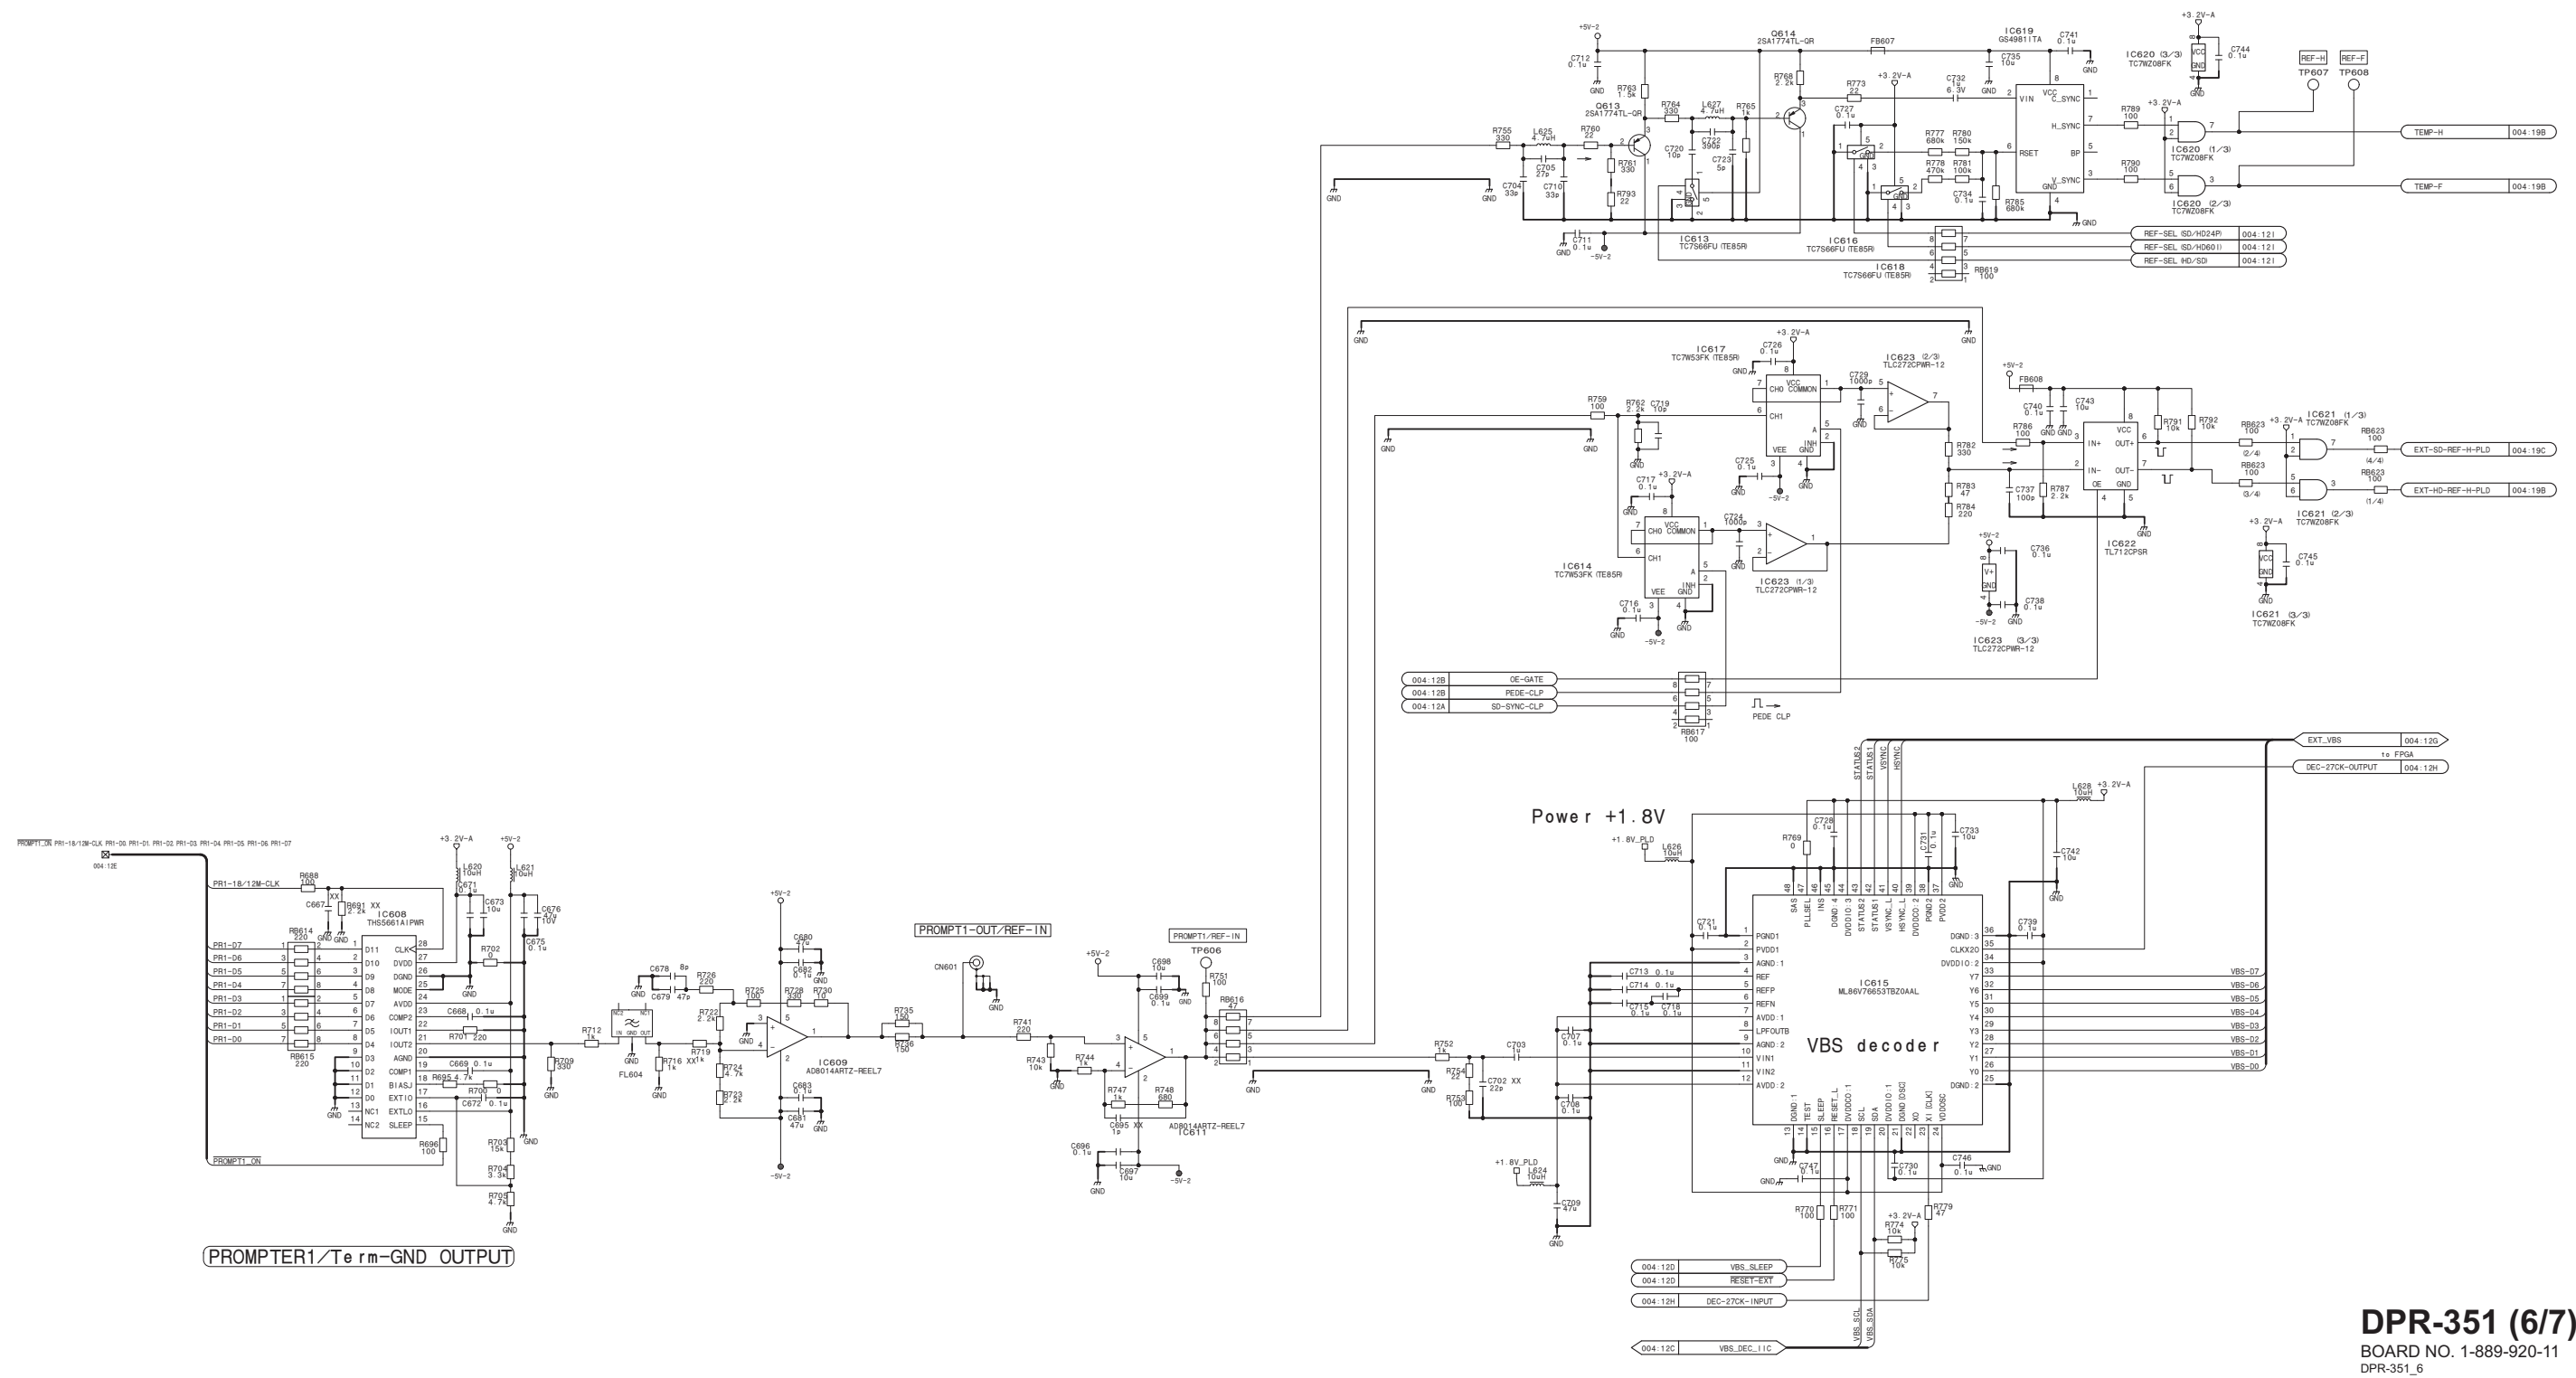


DPR-351 (7/7)_L

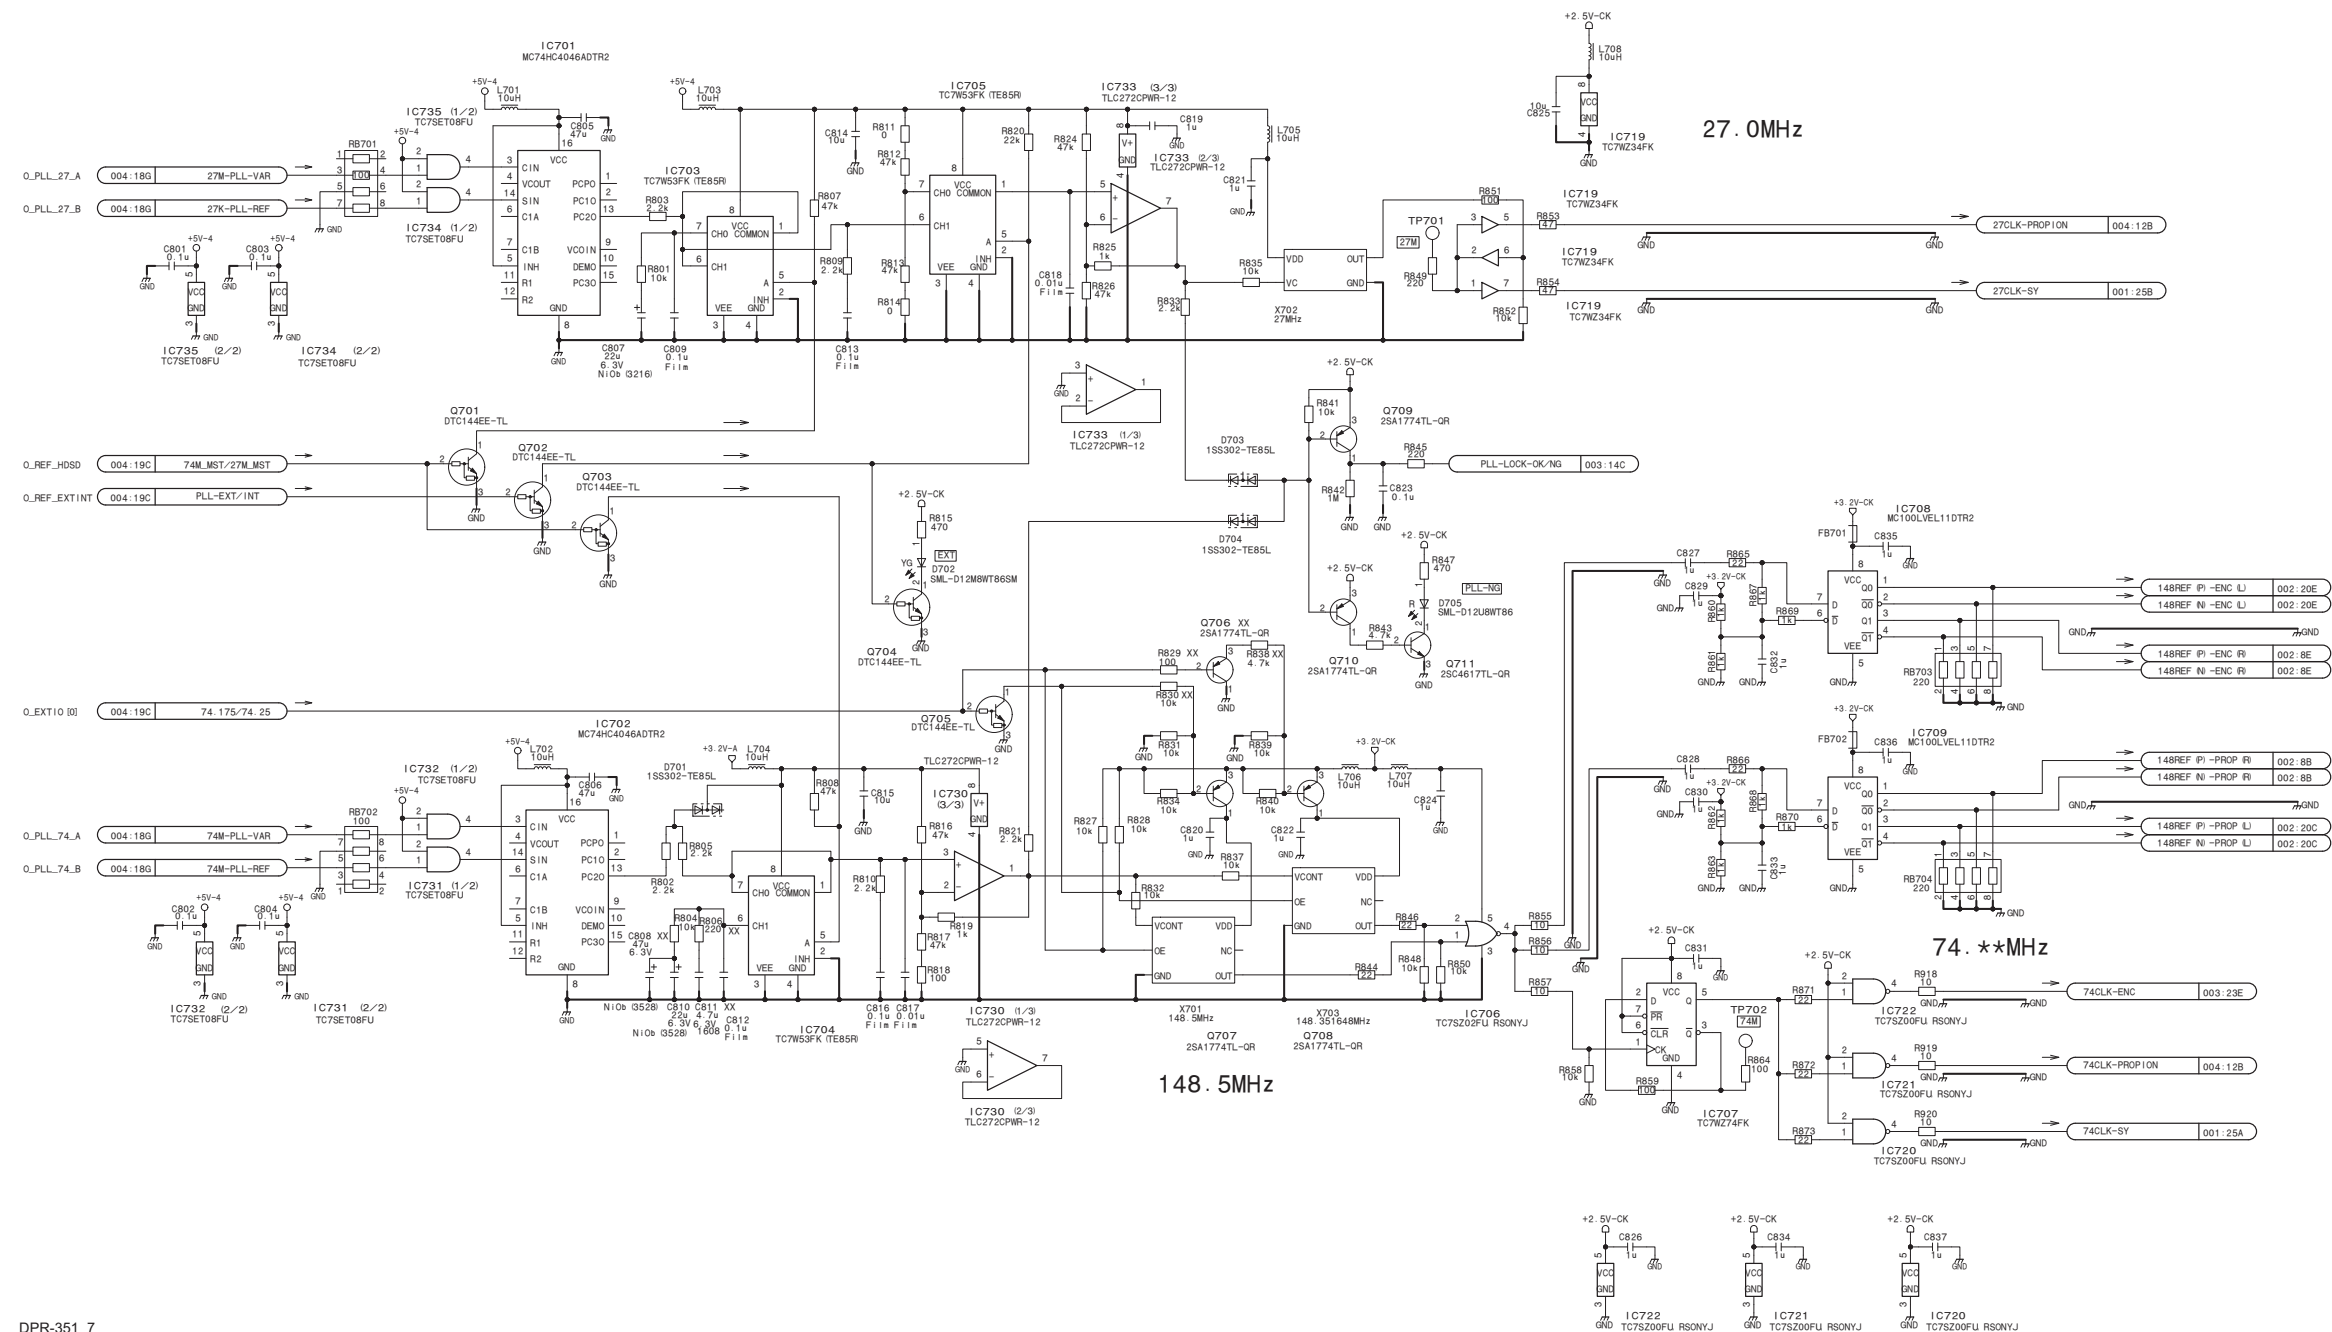

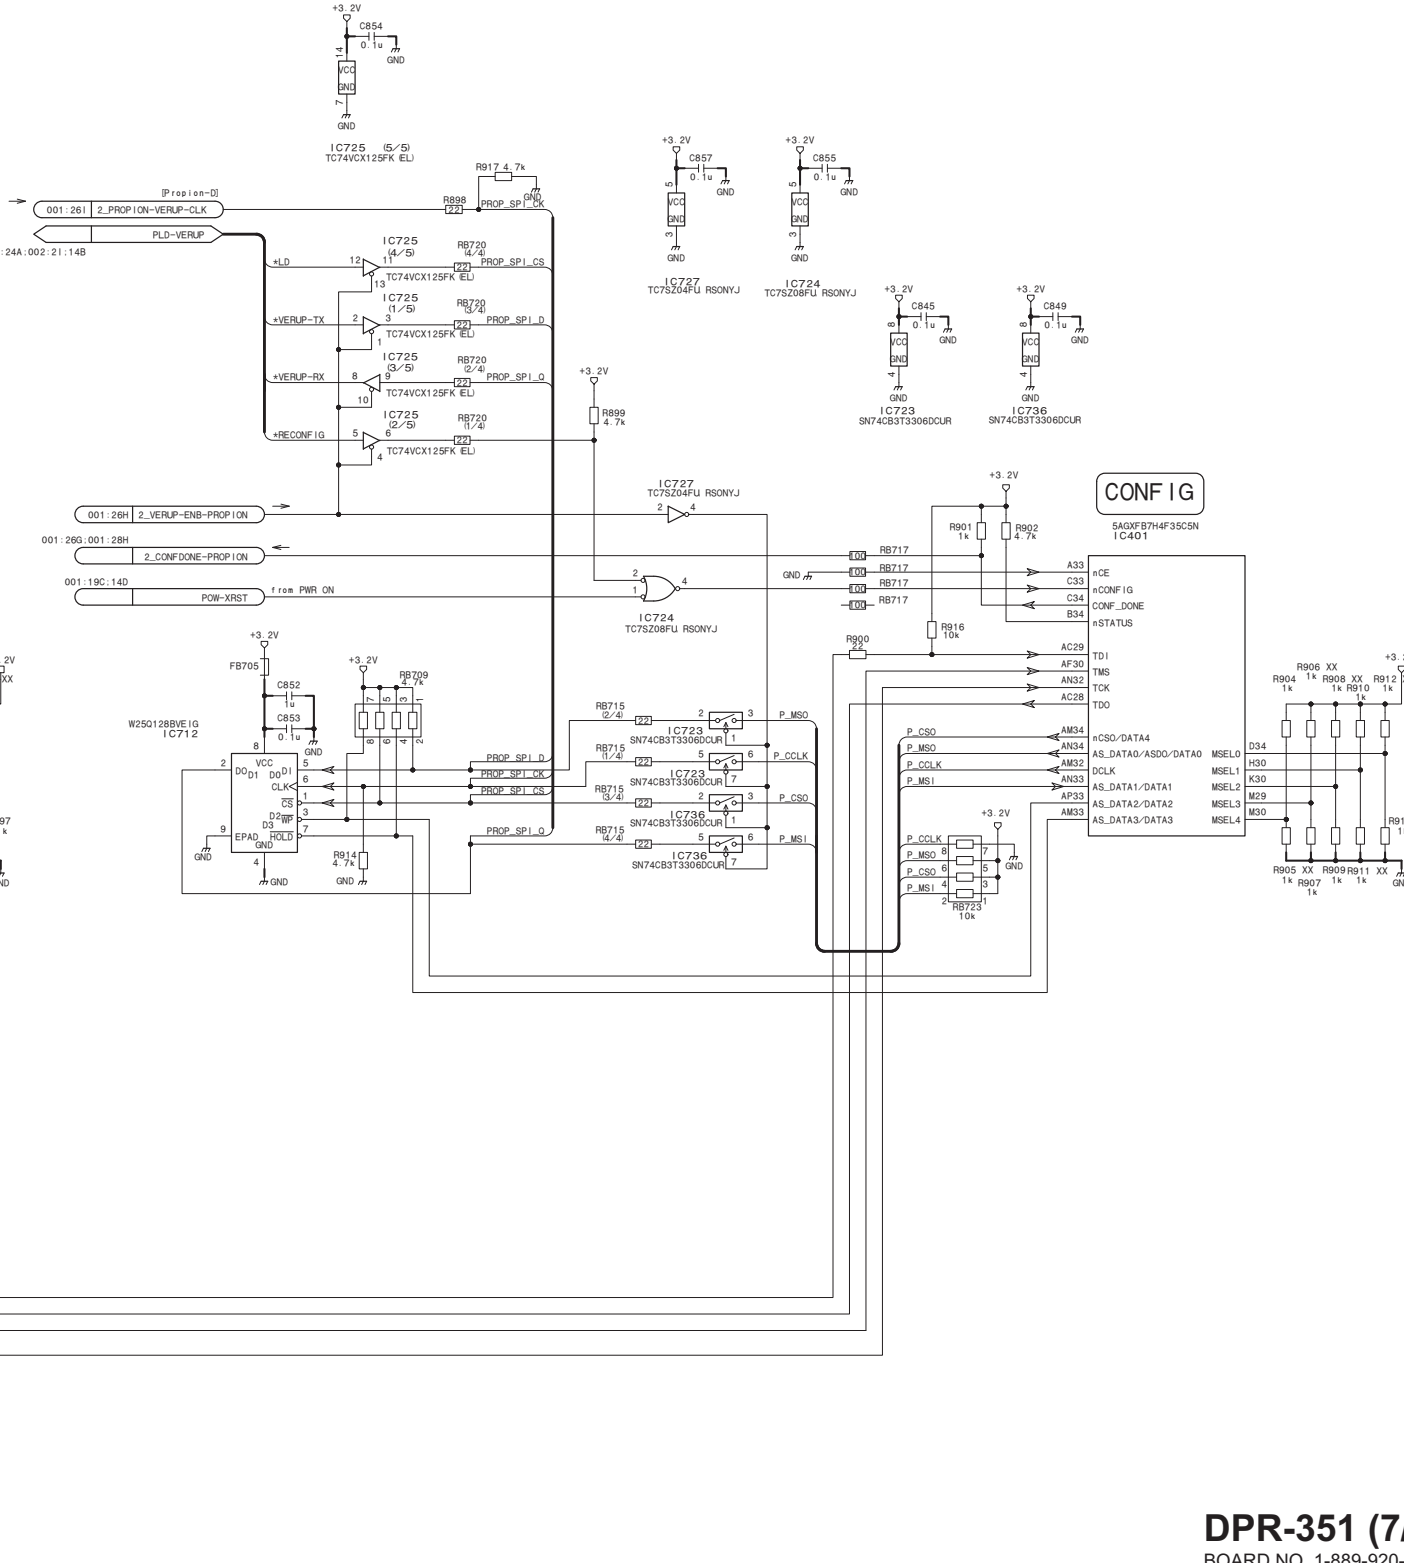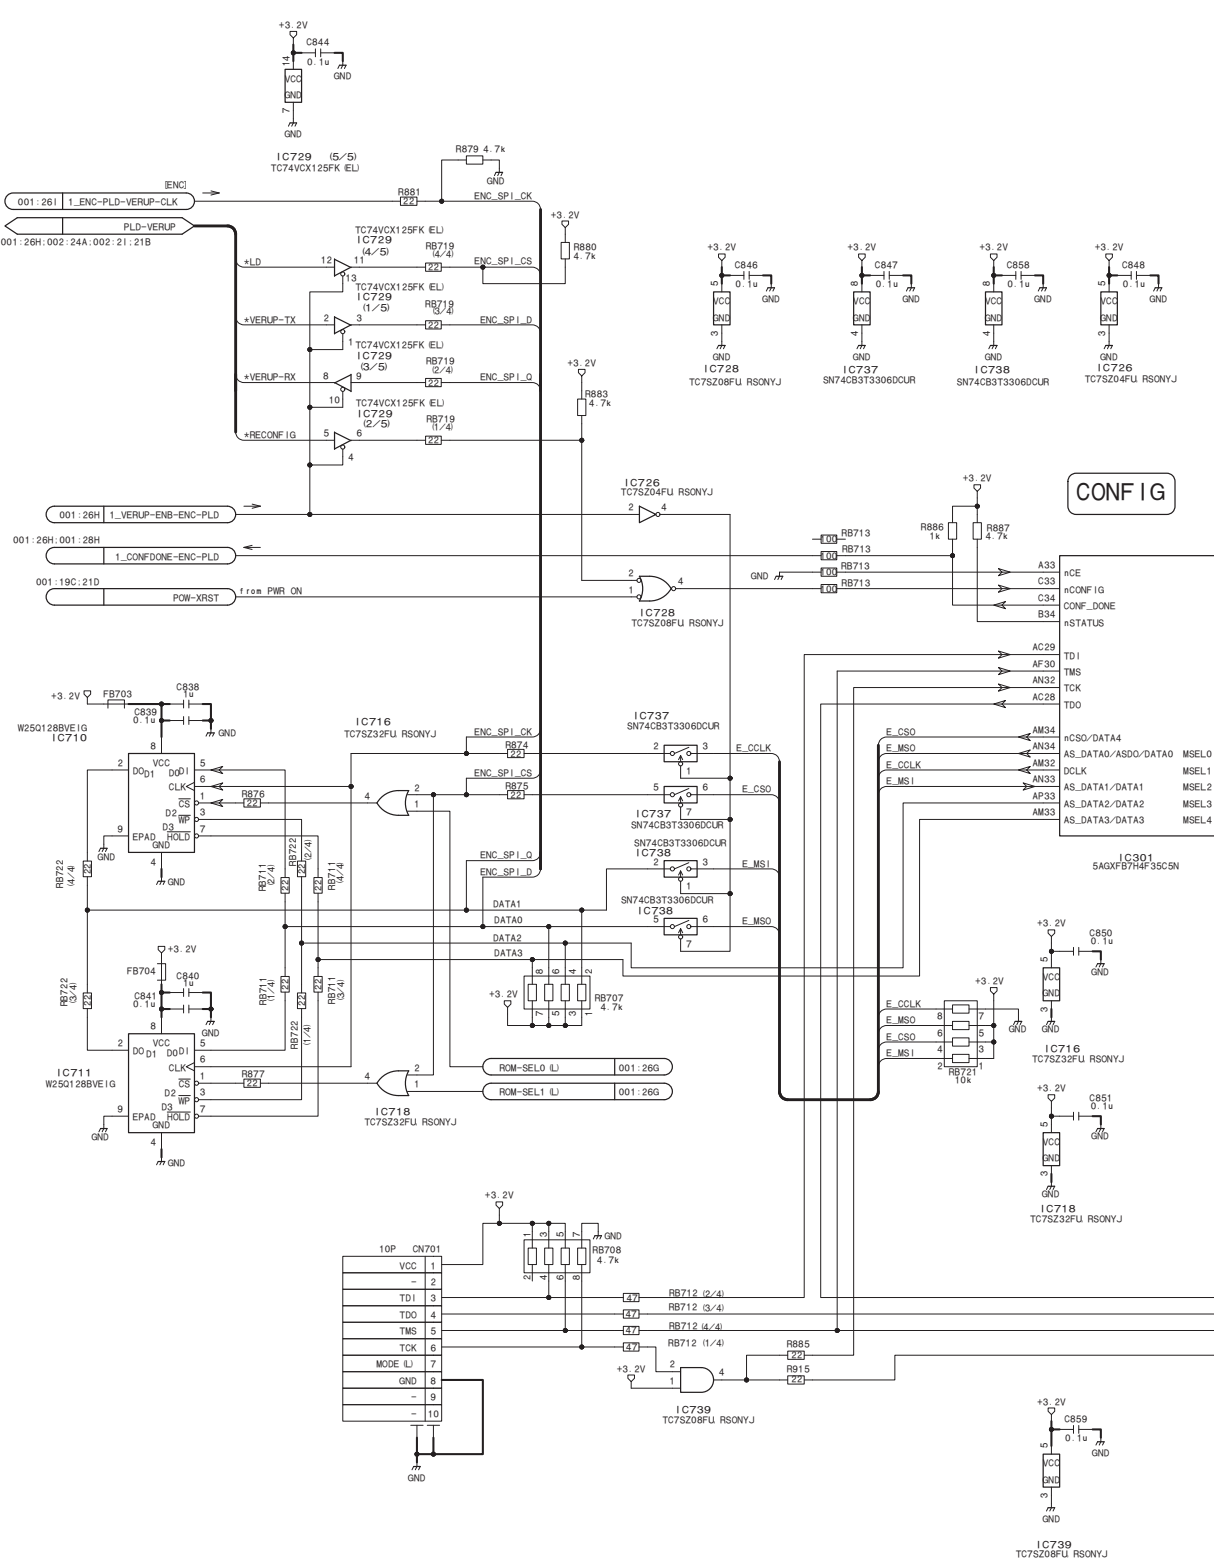






SY-427

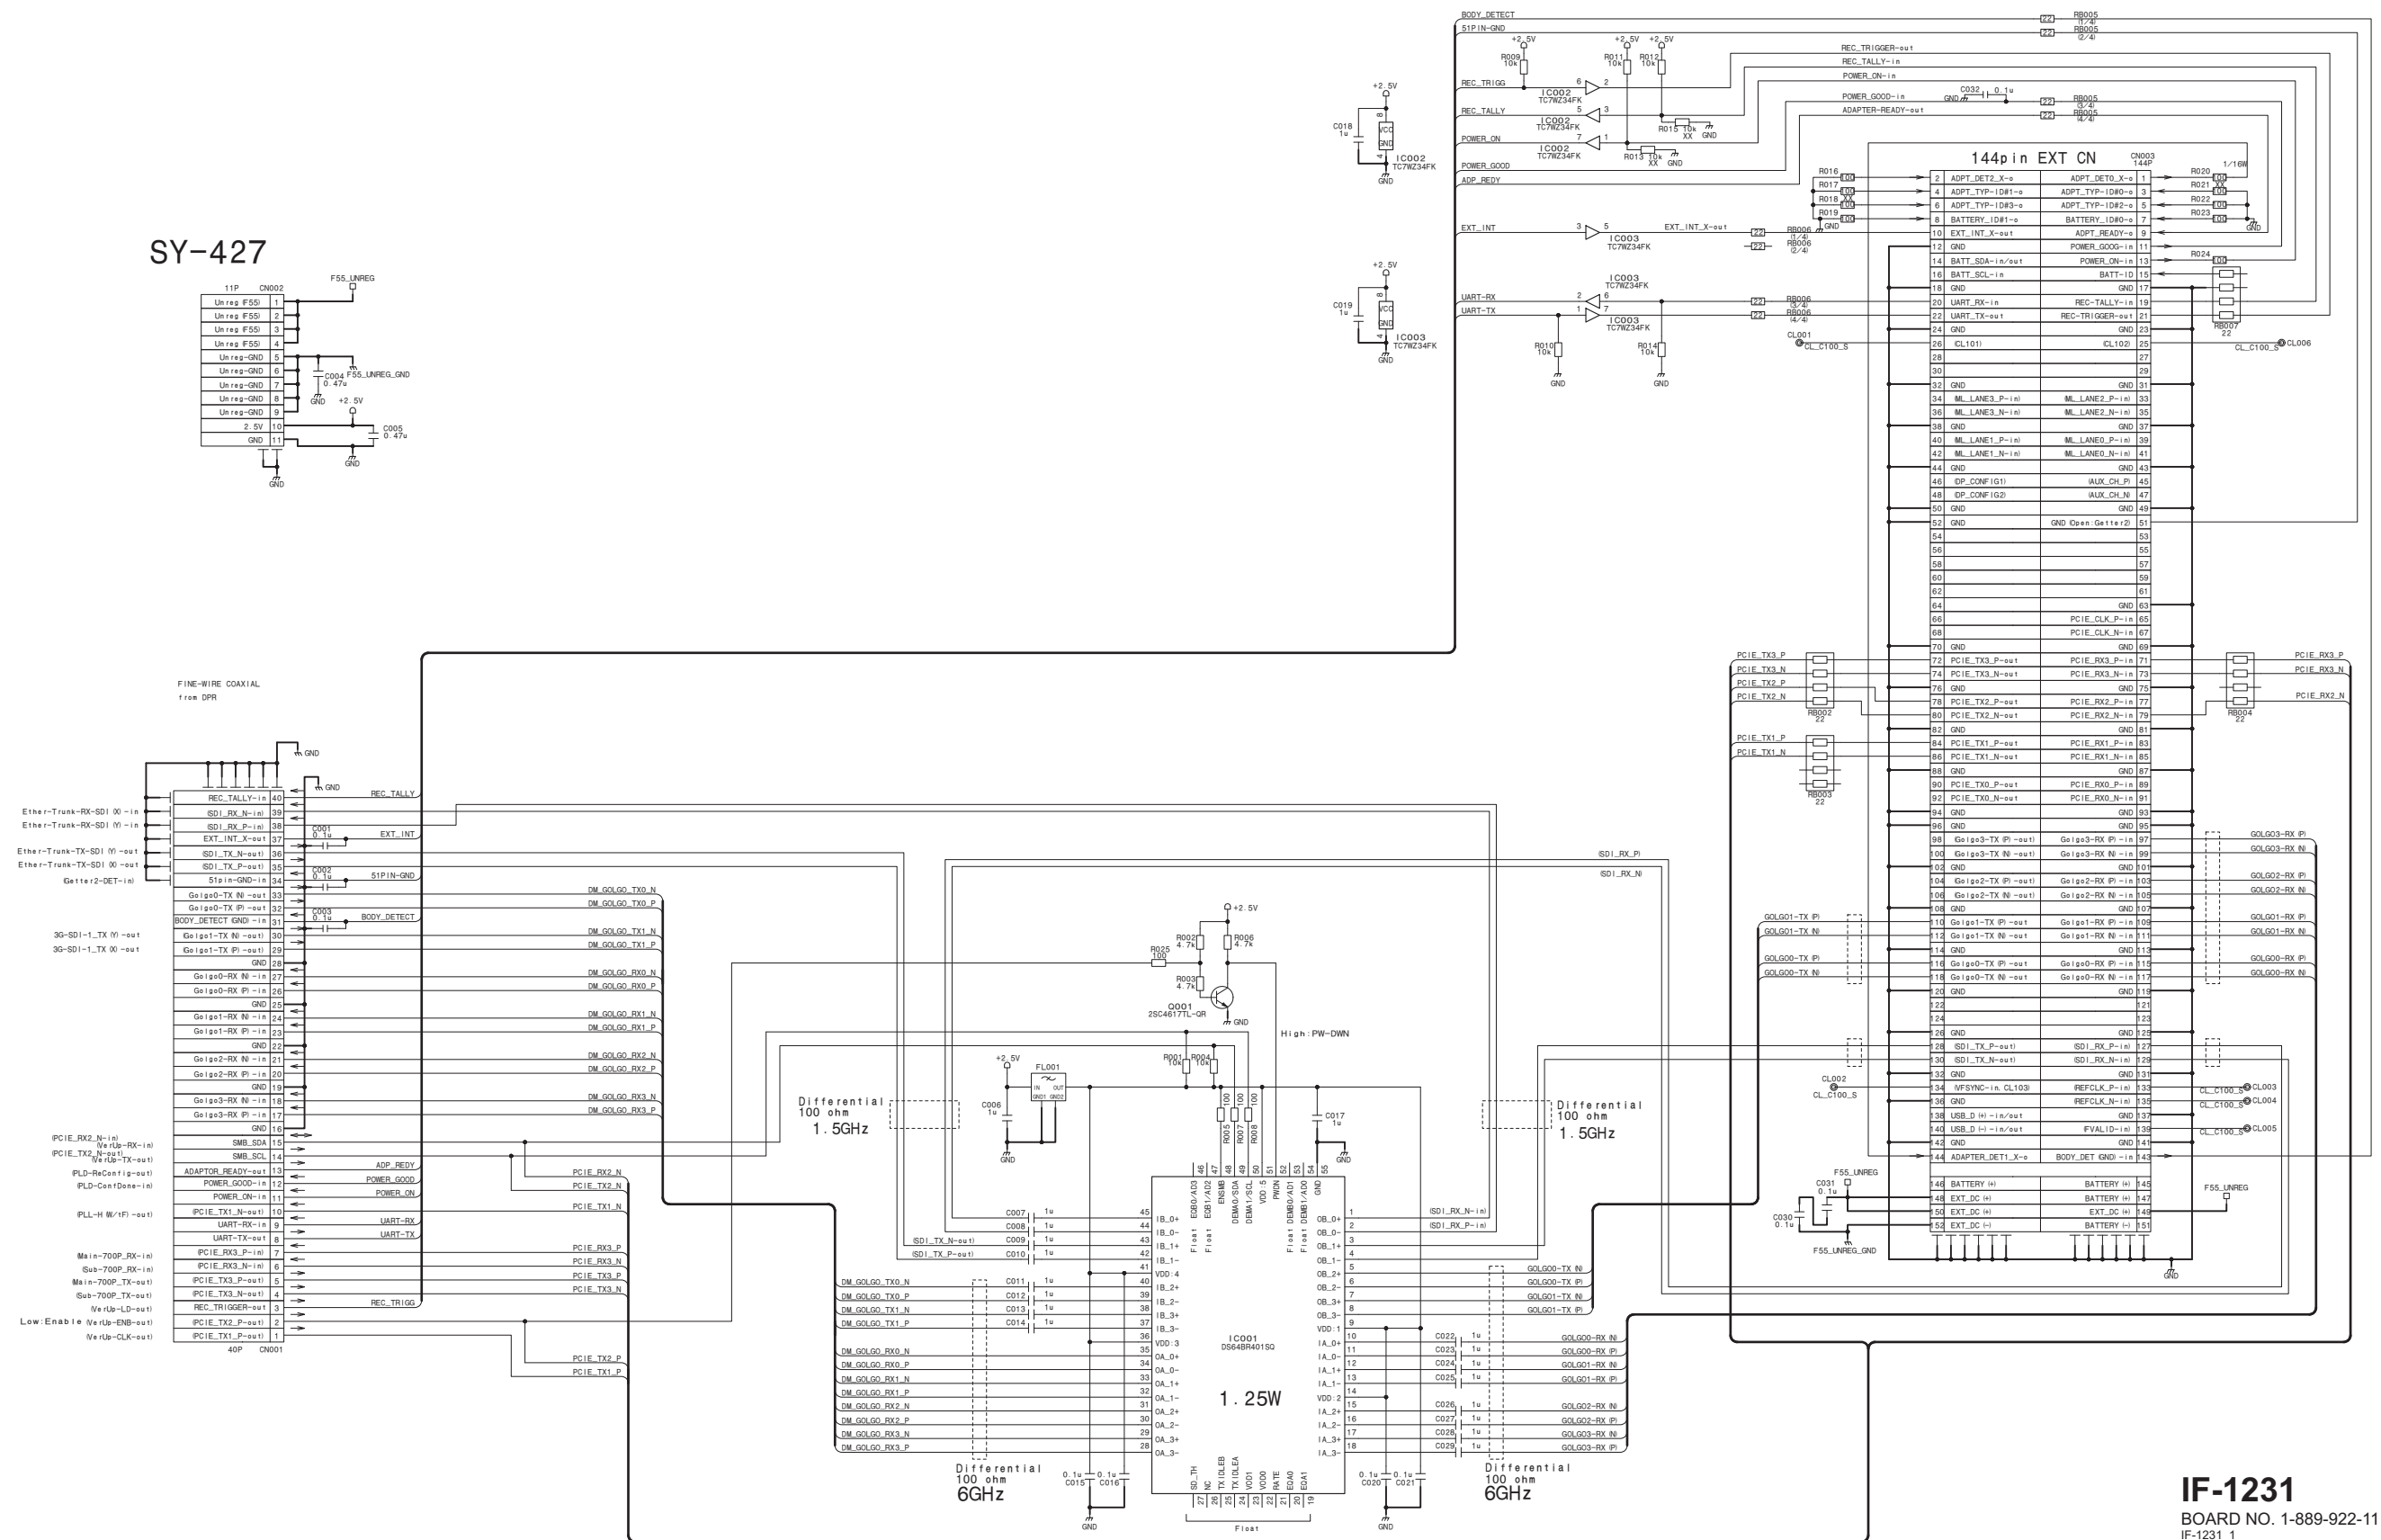







IF-1231

BOARD NO. 1-889-922-11
IF-1231_1

IF-1262

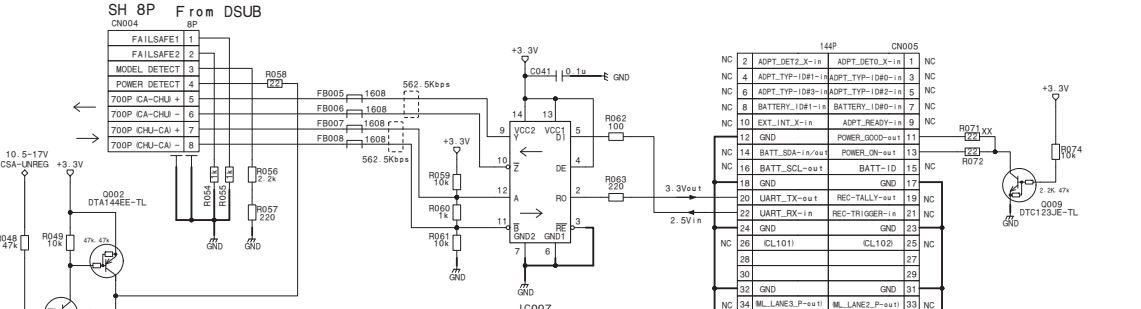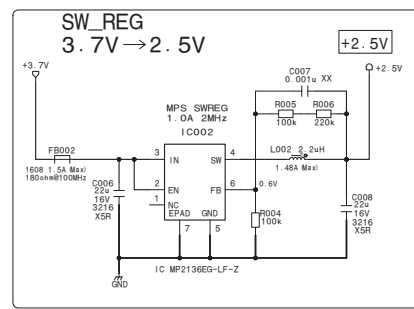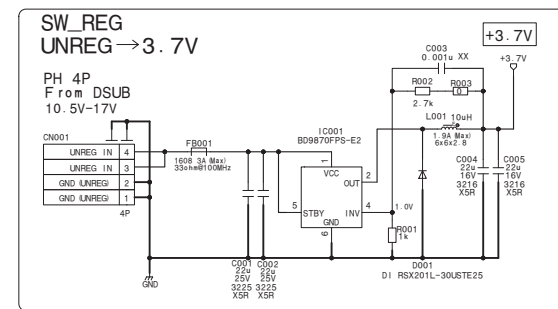


Argo TX, RX 5.94Gbps

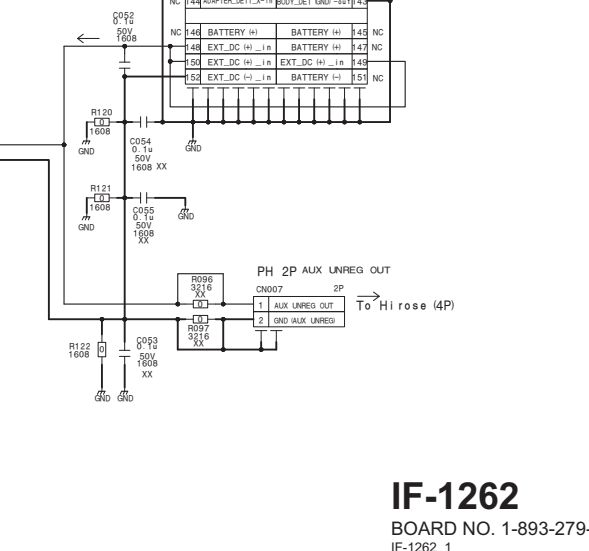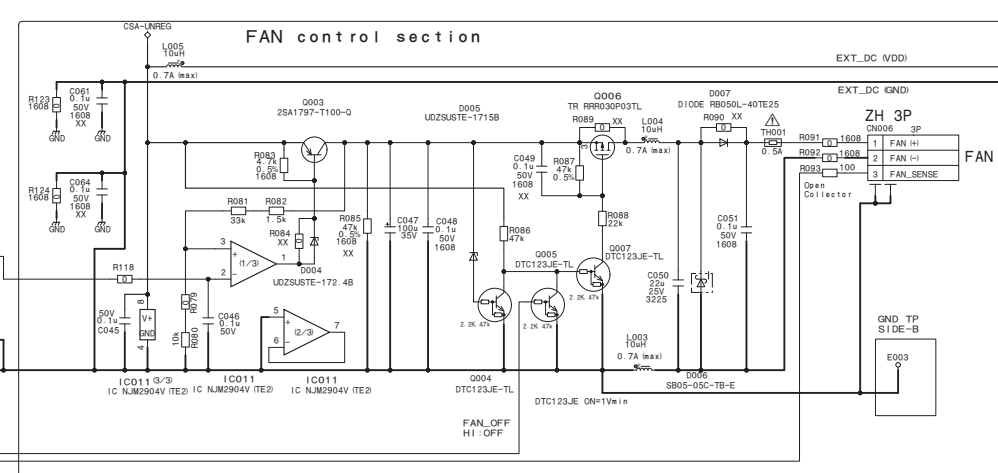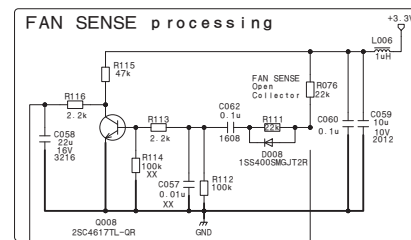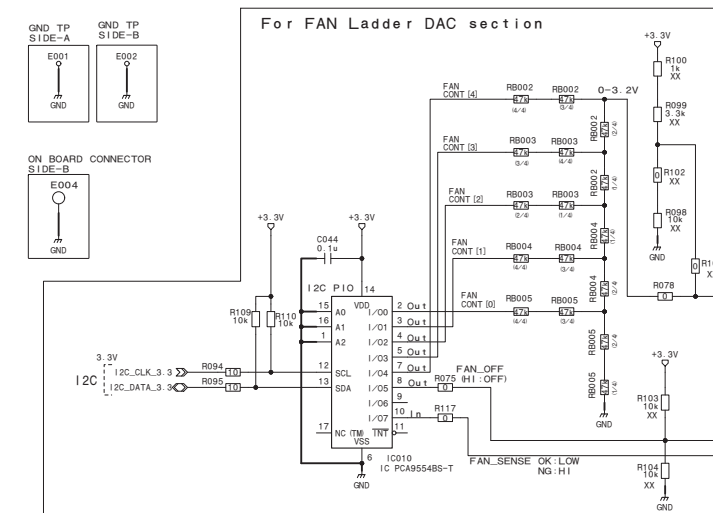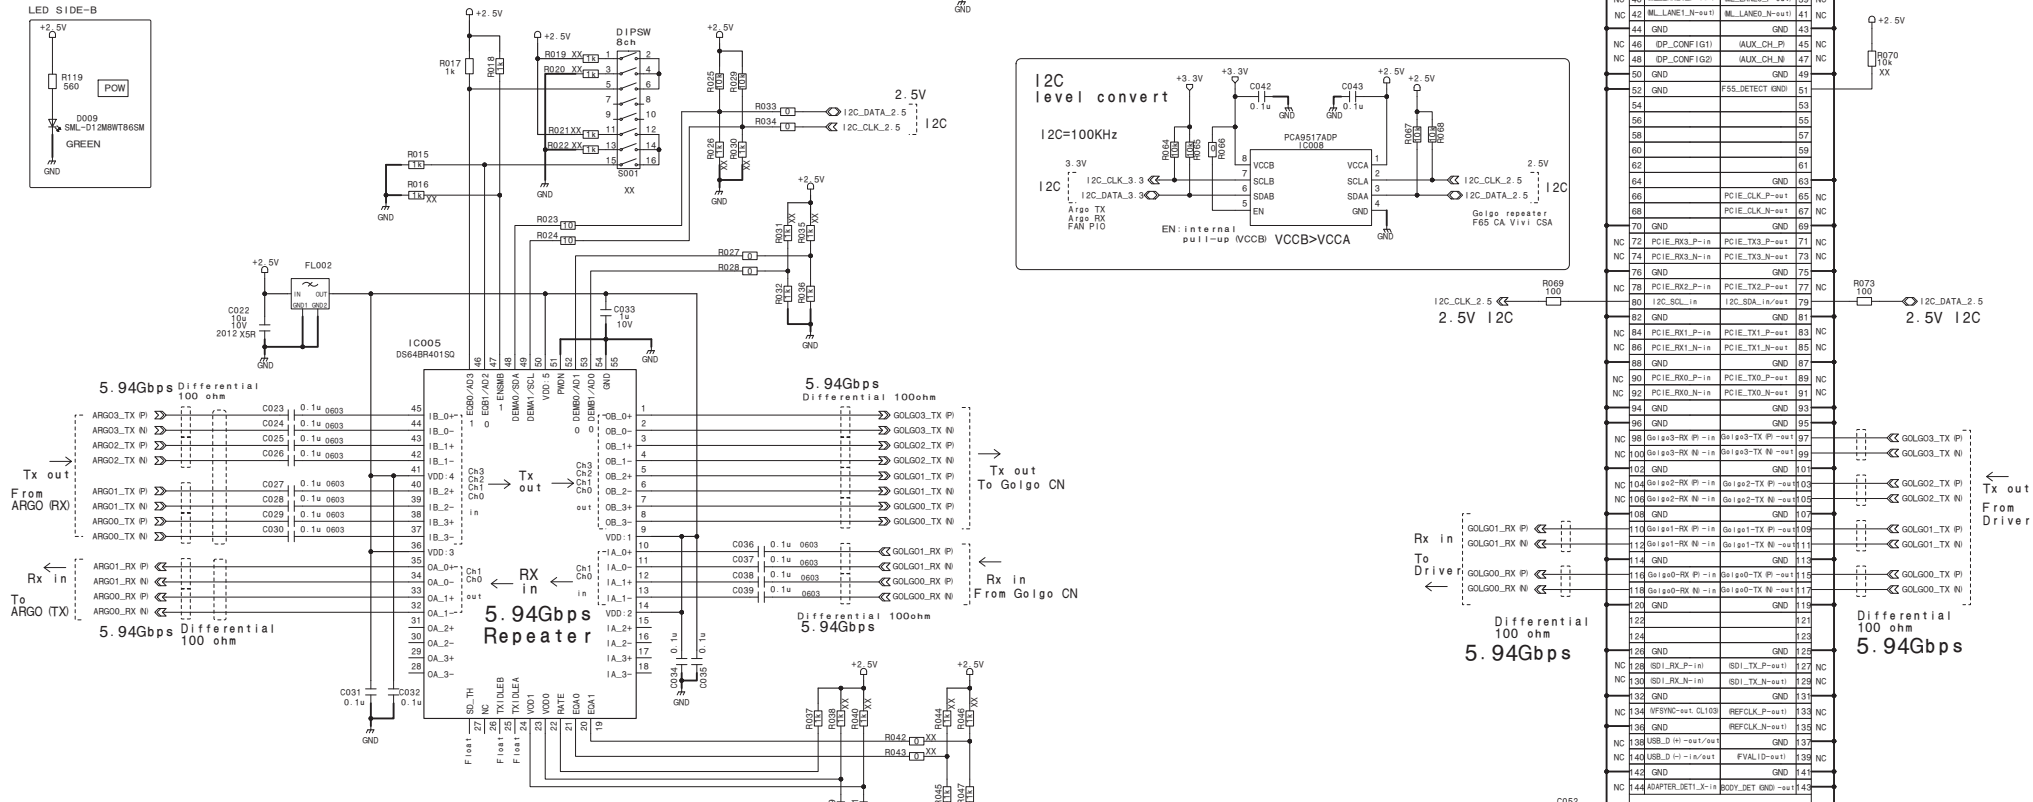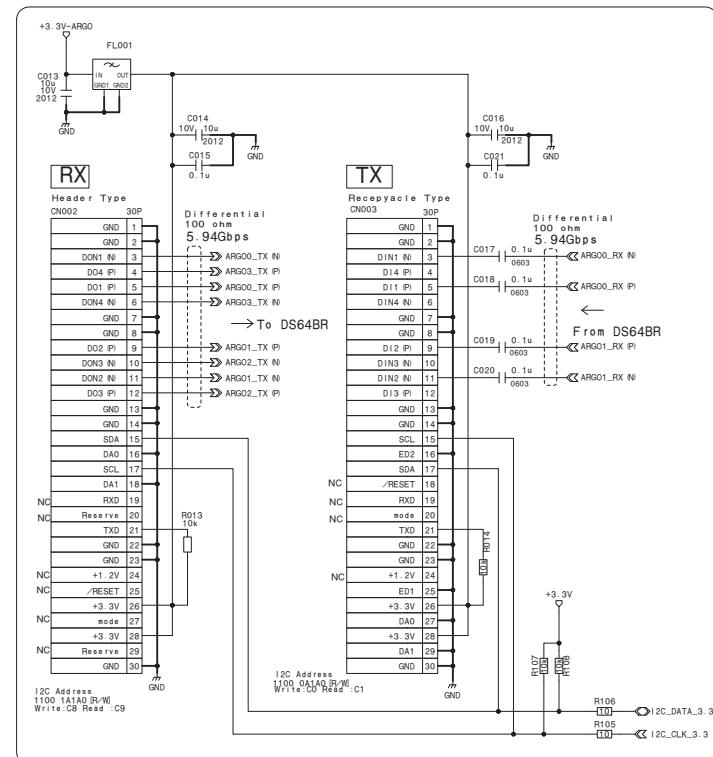


IF-1262
BOARD NO. 1-893-279-11
IF-1262_1

SW1 594



SW-1592
BOARD NO. 1-889-921-11
SW-1592_1

SW-1592A

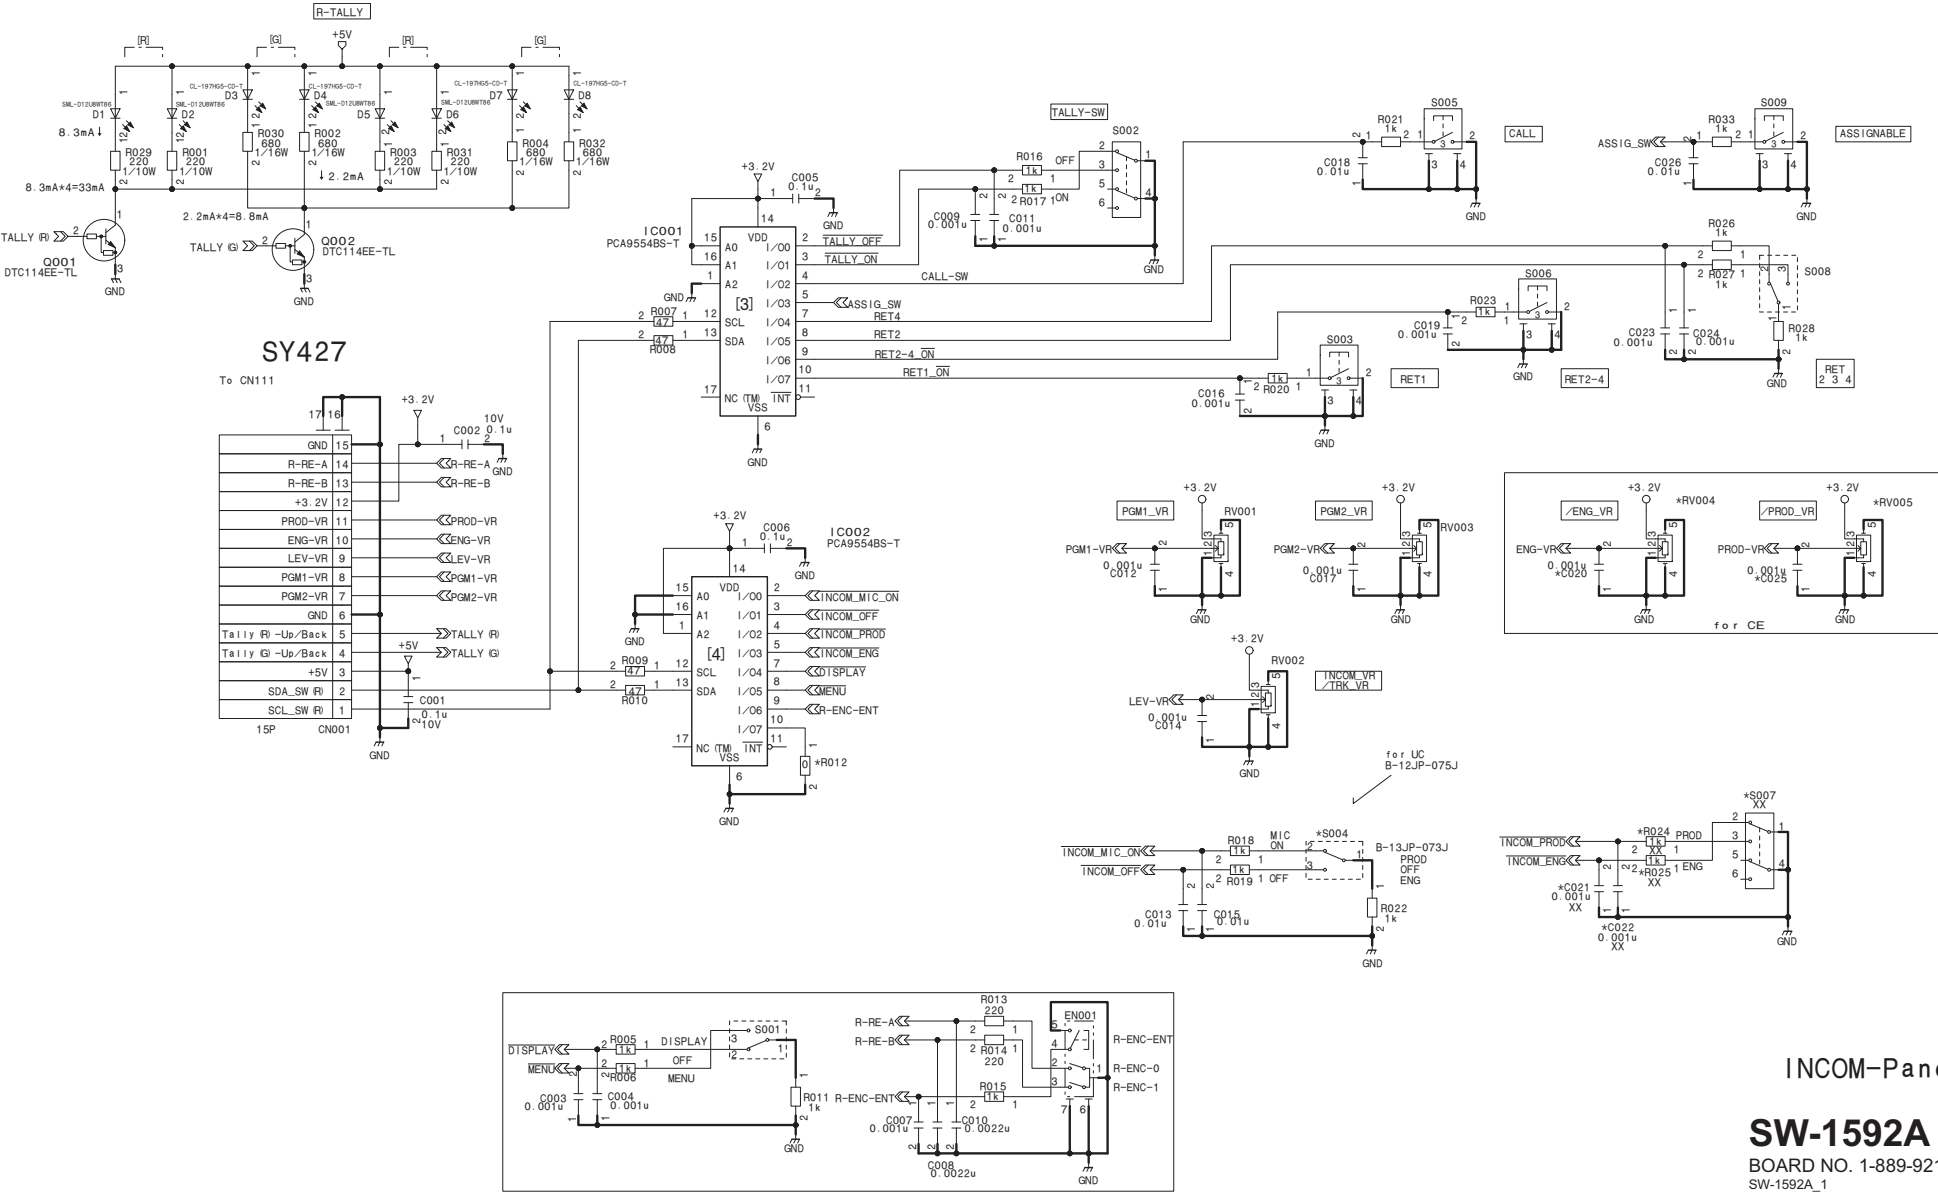


INCOM-Pane I


SW-1592A

BOARD NO. 1-889-921-11
SW-1592A_1

SW-1594

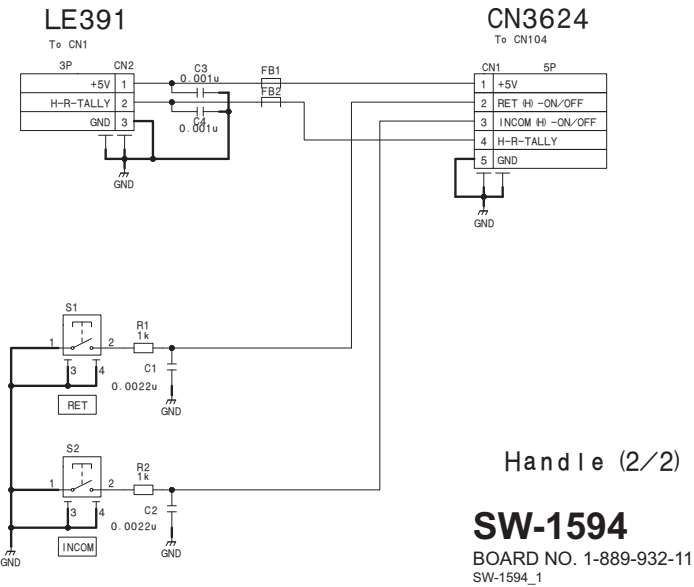


SW-1595

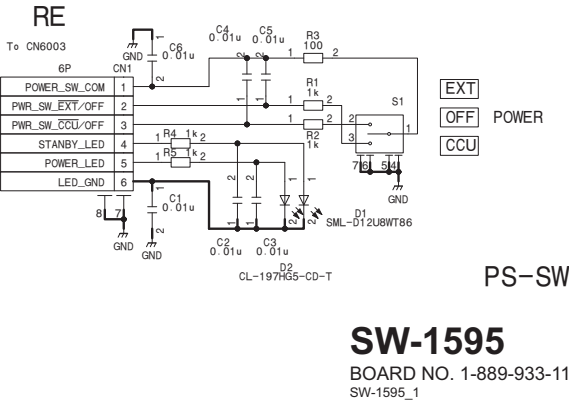


SY-427
SY-427 (1/14)


DPR351 (1/2)

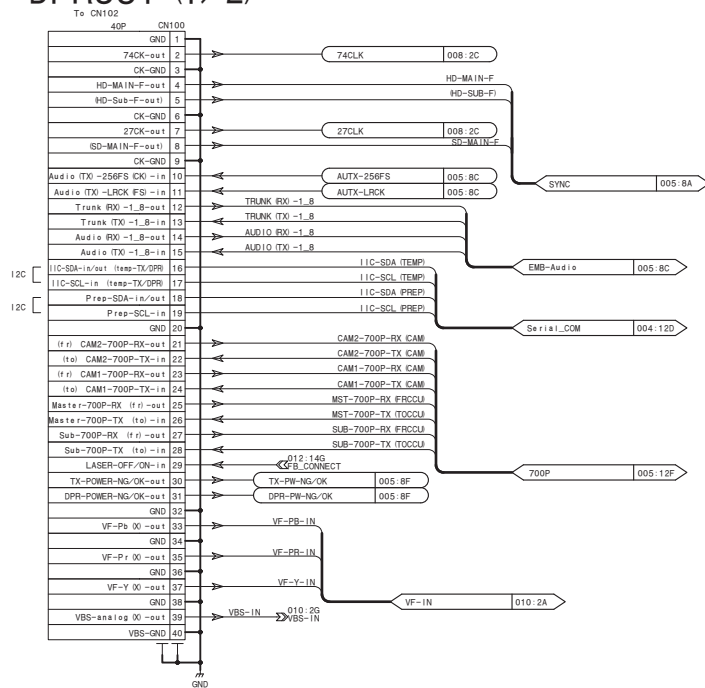

DPR351 (2/2)

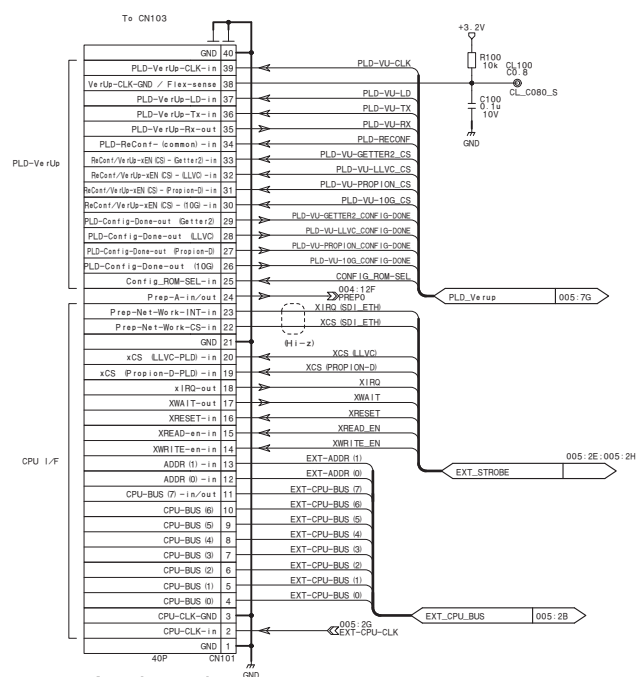


IF1231




VF

CN3602

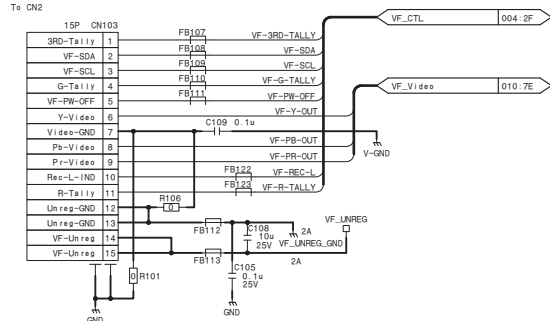


DVF Power

CN3624

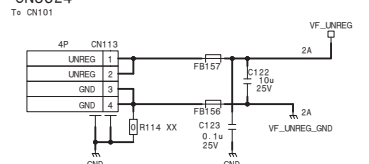


LENS

CN3601

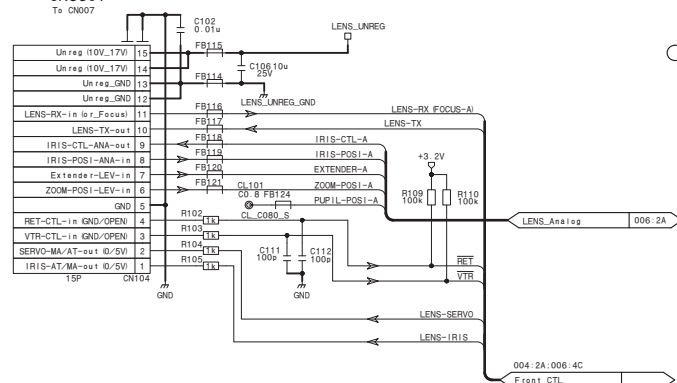


Handle

CN362

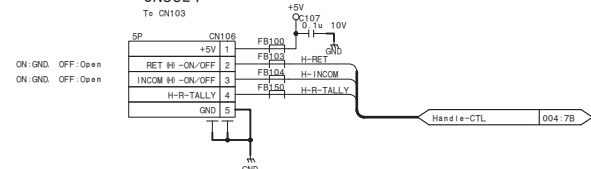


INCOM2

CN3606

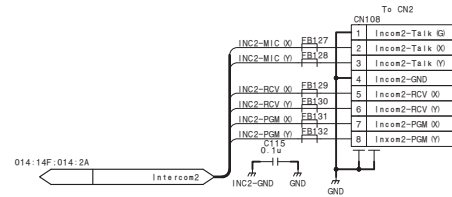


MIC2/AES

CN3607




REMOTE

CN36

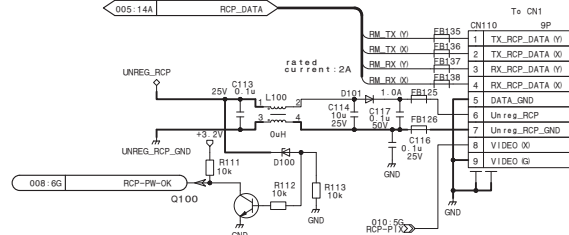


PS

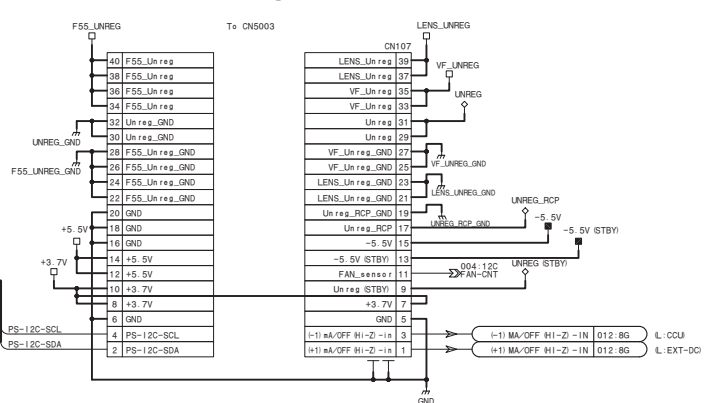



INCOM Panel

SW1592

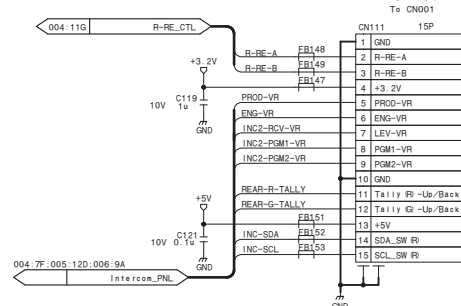

TRK Panel I

CN3601

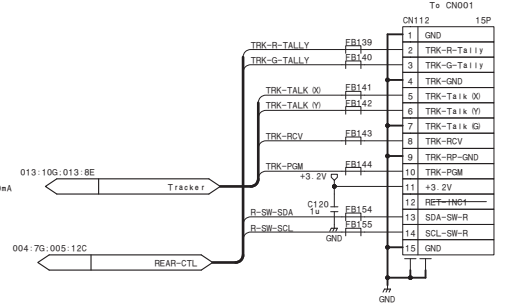











Connector

SY-427 (1/14)

BOARD NO. 1-889-919-11
SY-427_1


SY-427 (2/14)

Standby Power

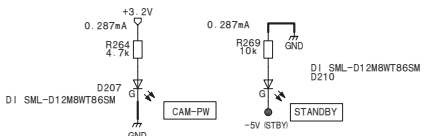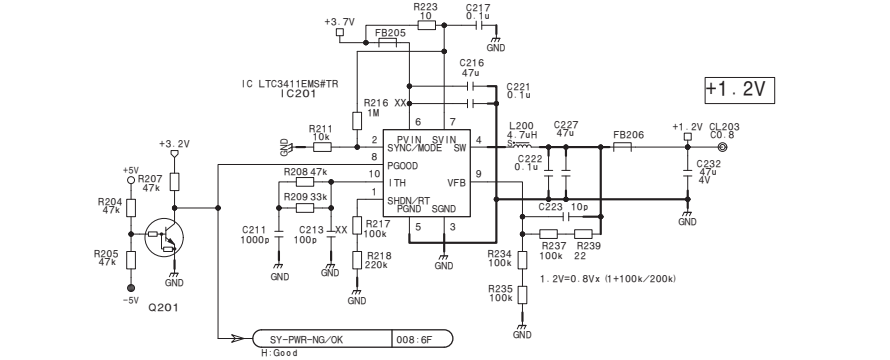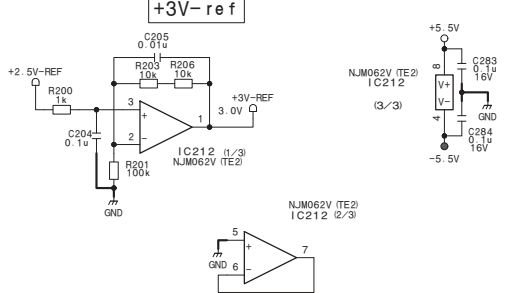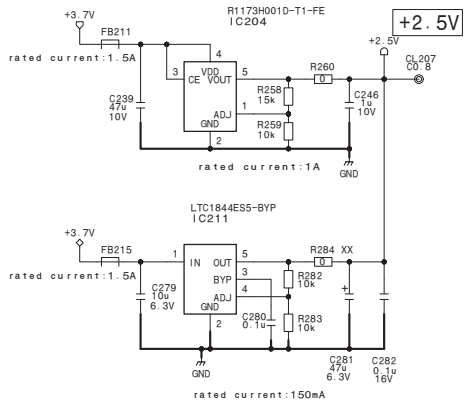
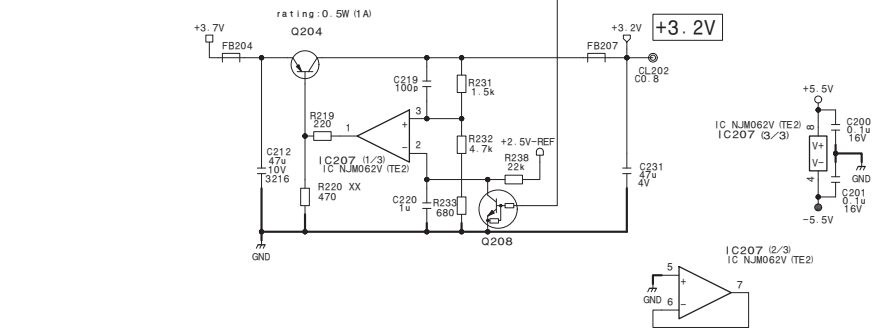
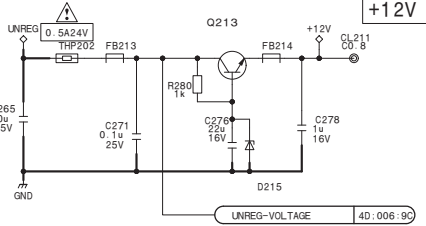
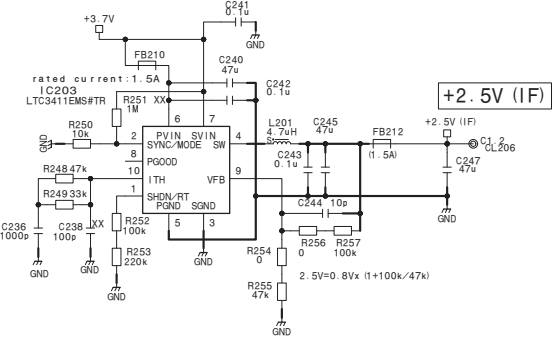
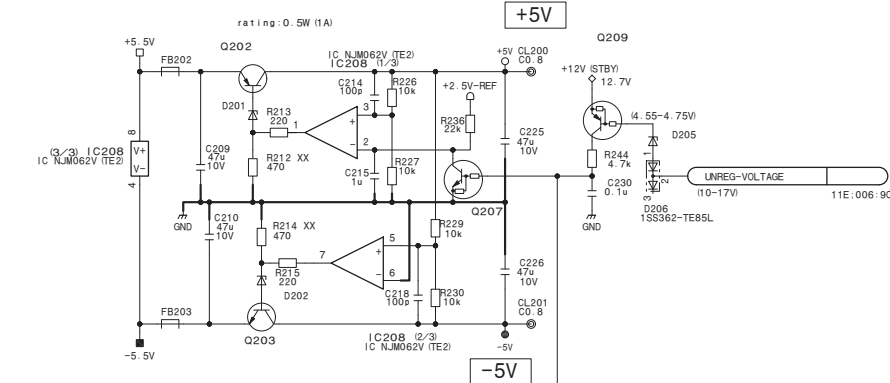
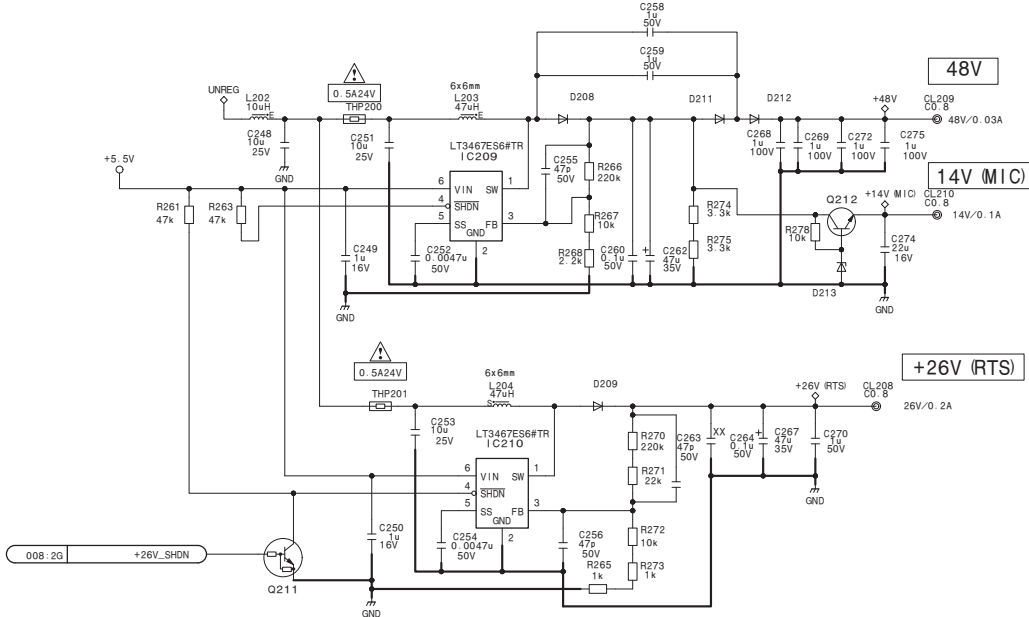
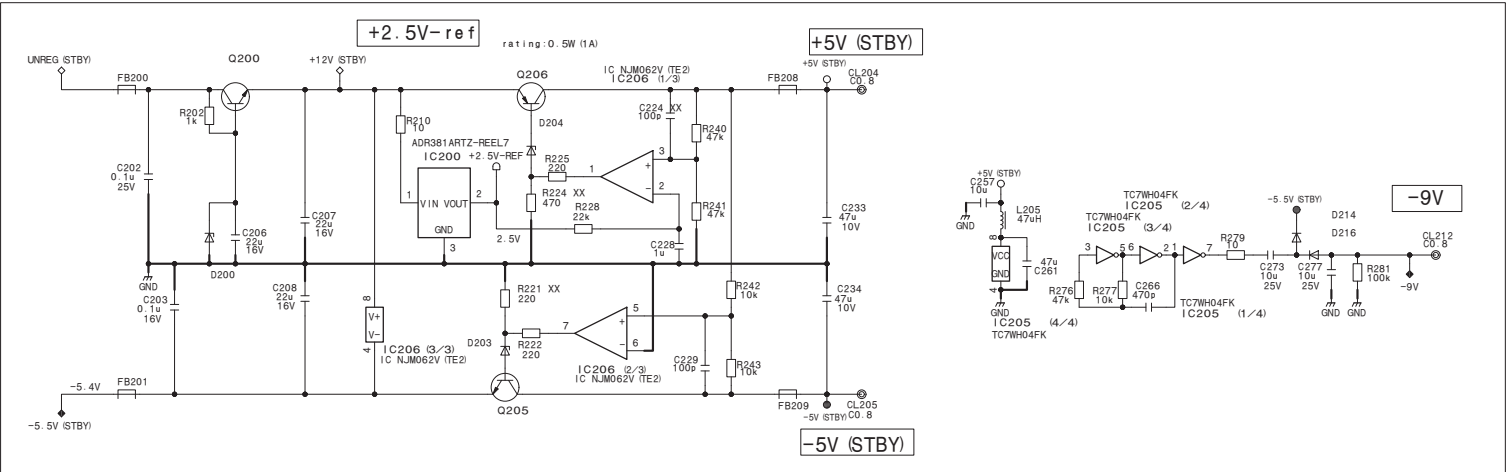


POWER









SY-427 (2/14)
BOARD NO. 1-889-919-11
SY-427_2


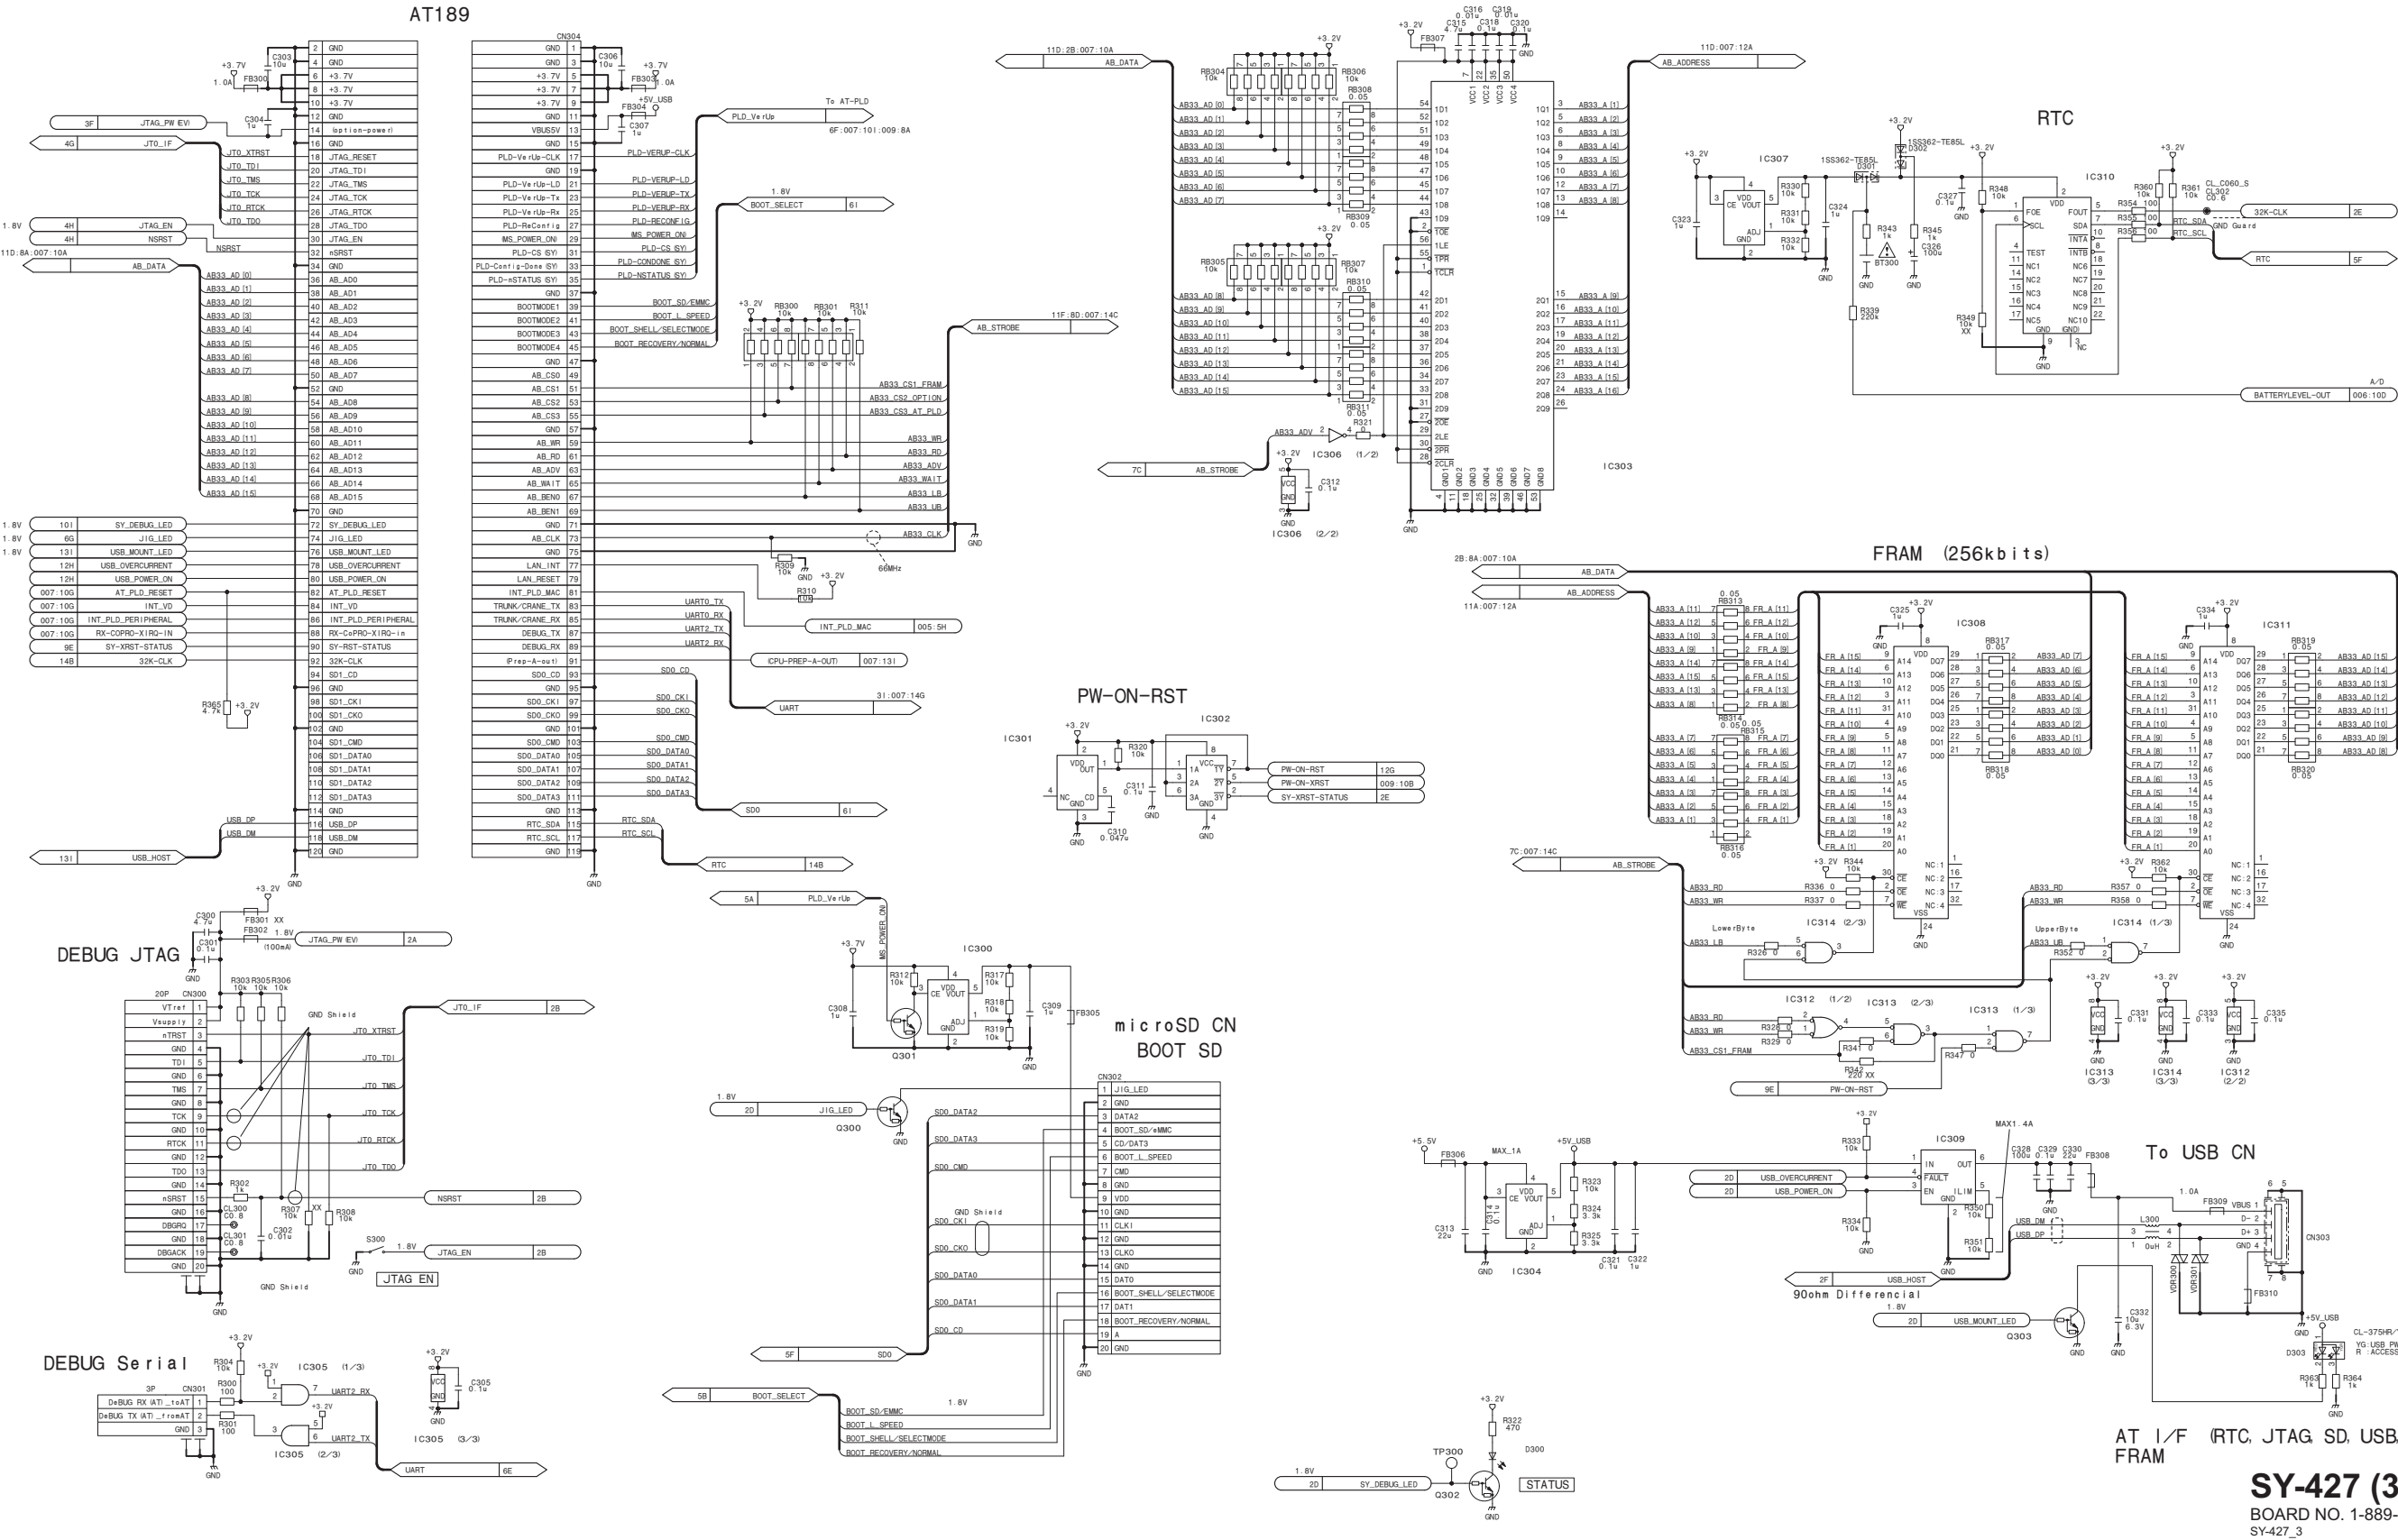


SY-427 (4/14)

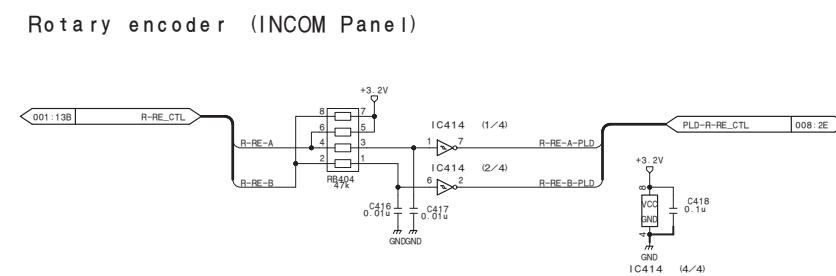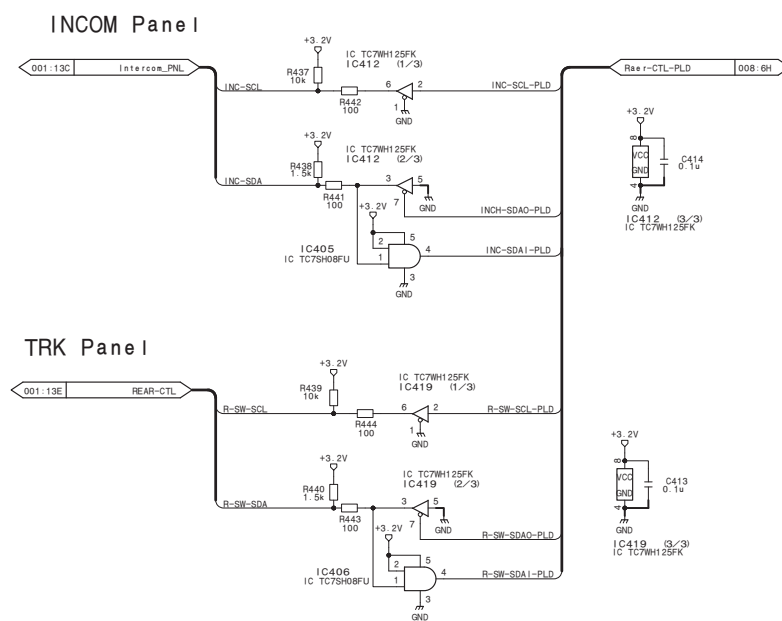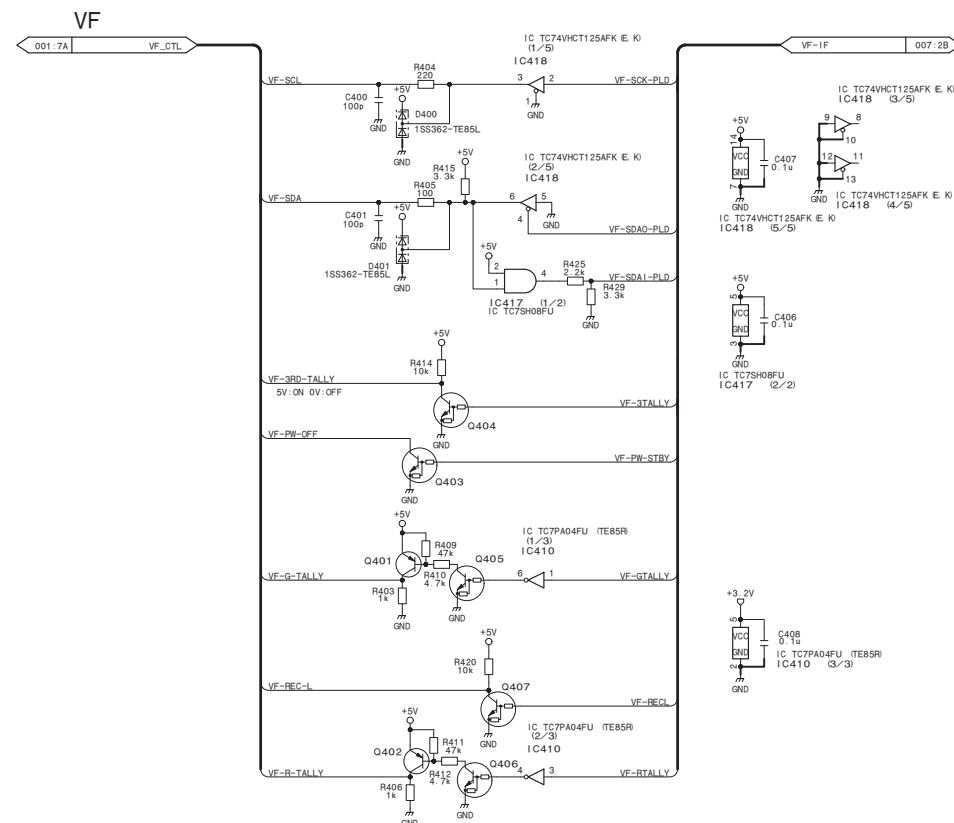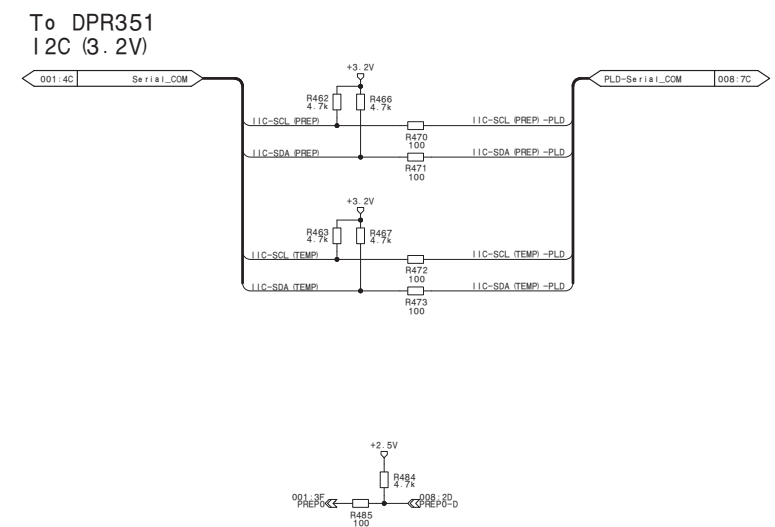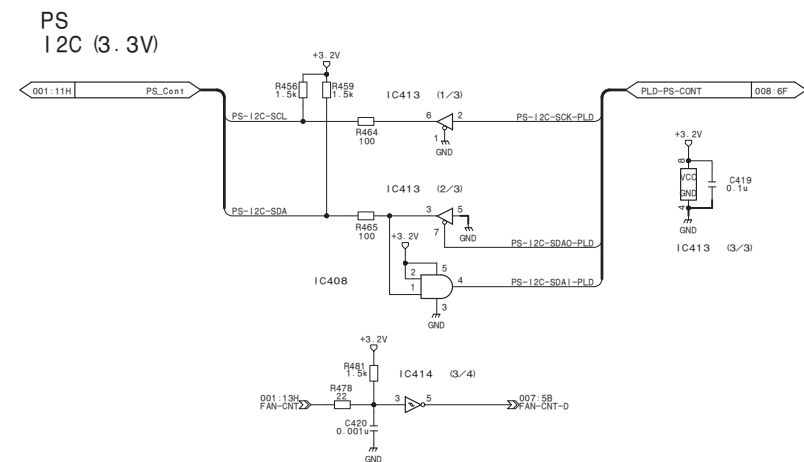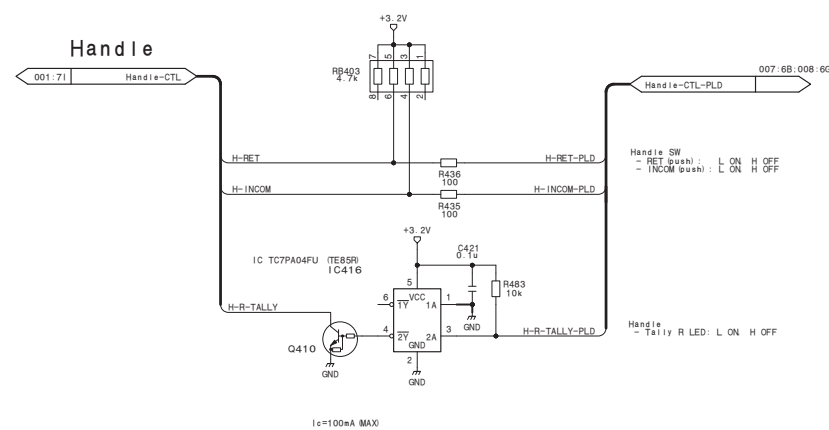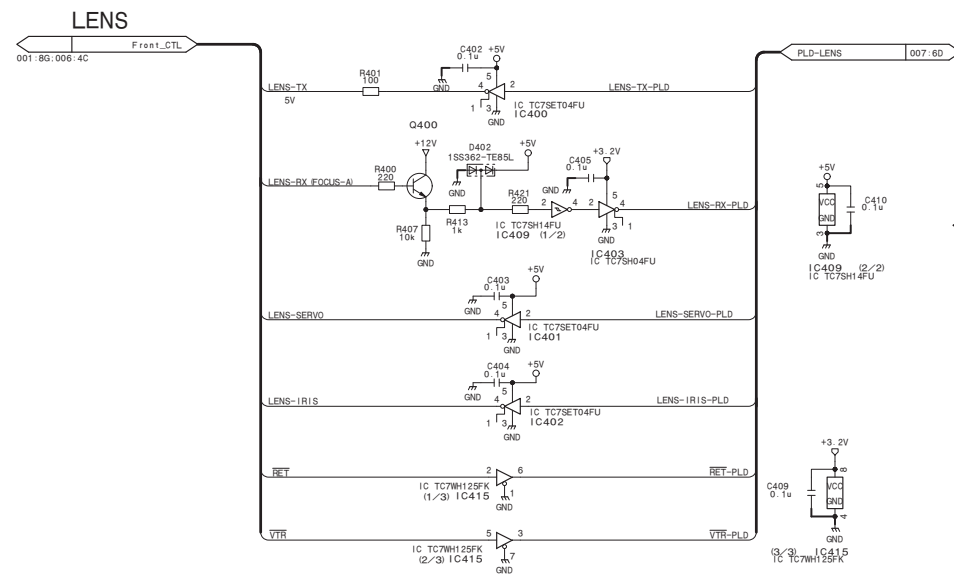 $1/F$






SY-427 (4/14)
BOARD NO. 1-889-919-11
SY-427_4

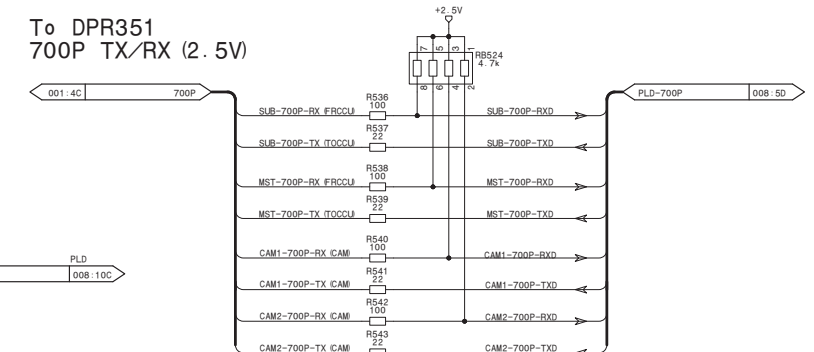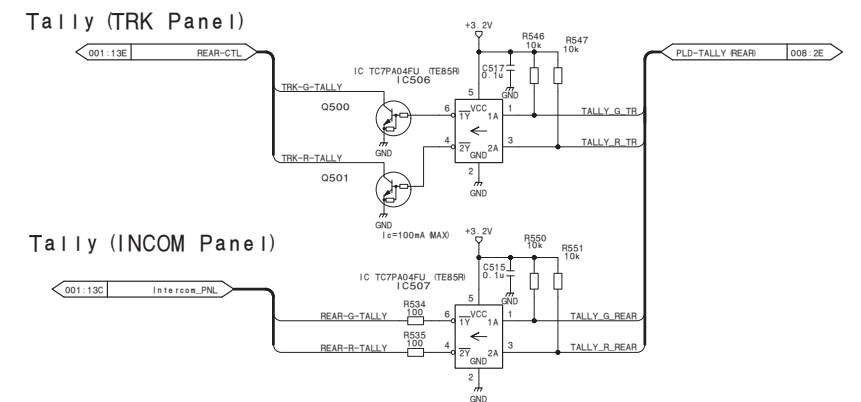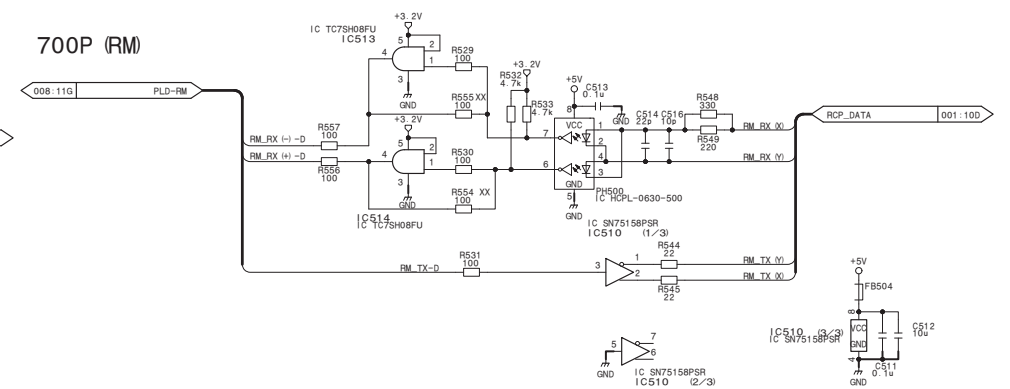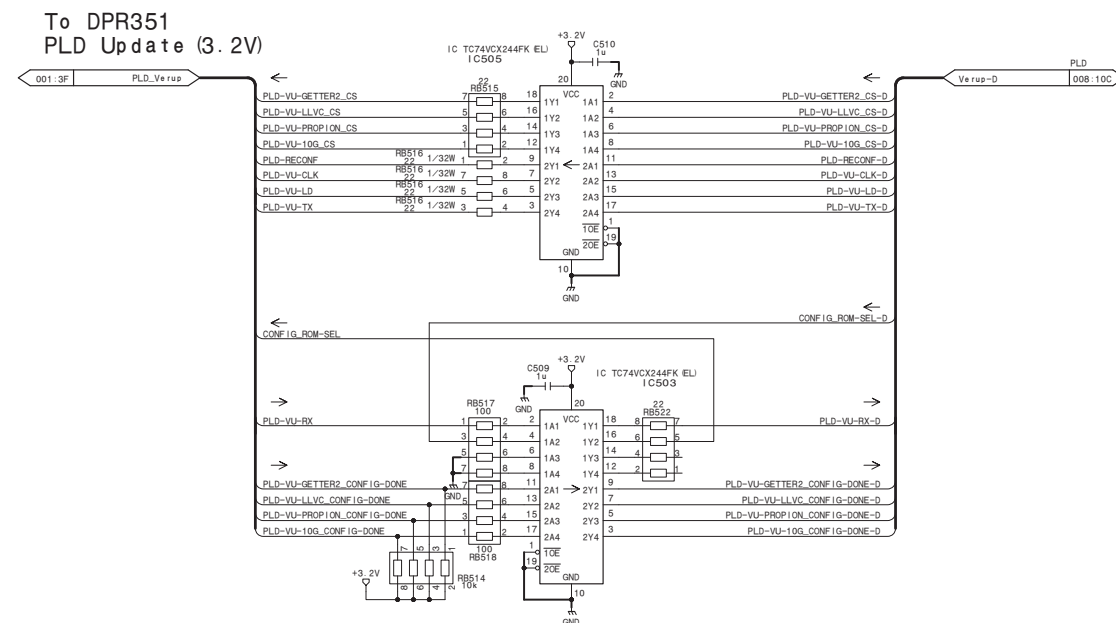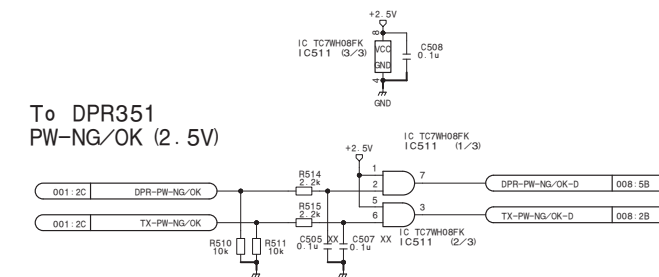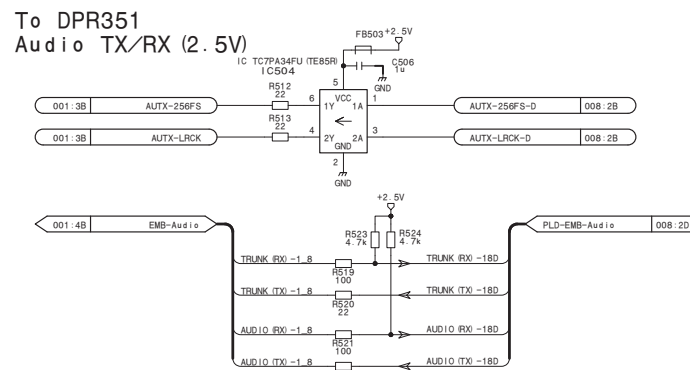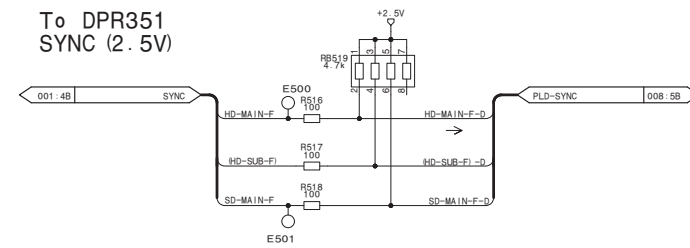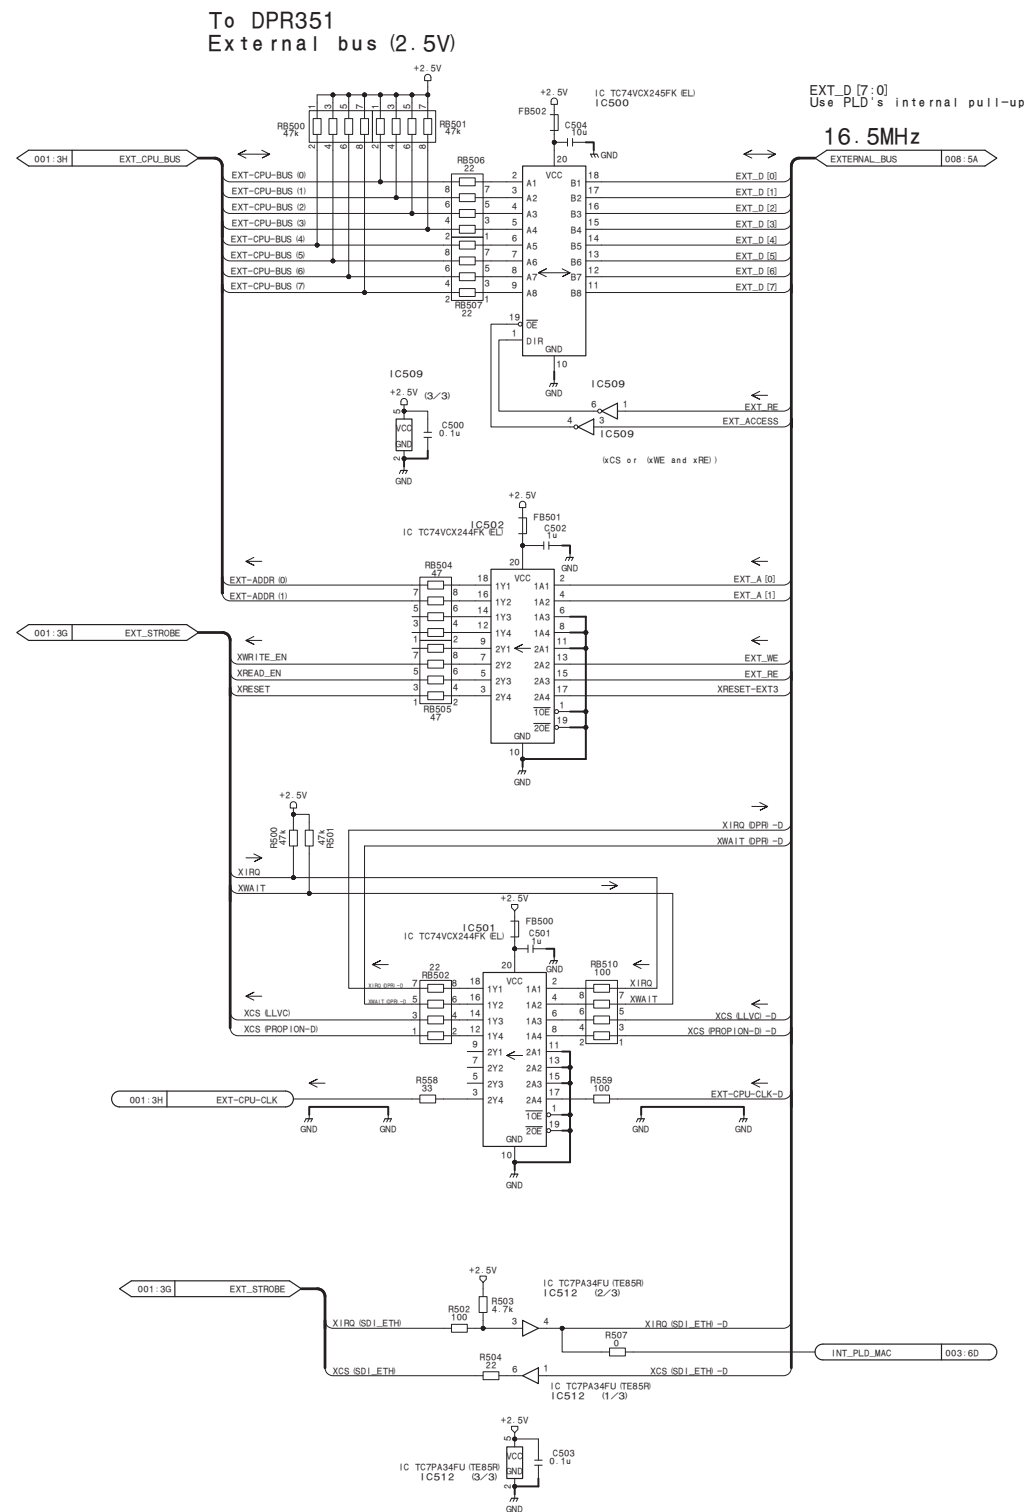

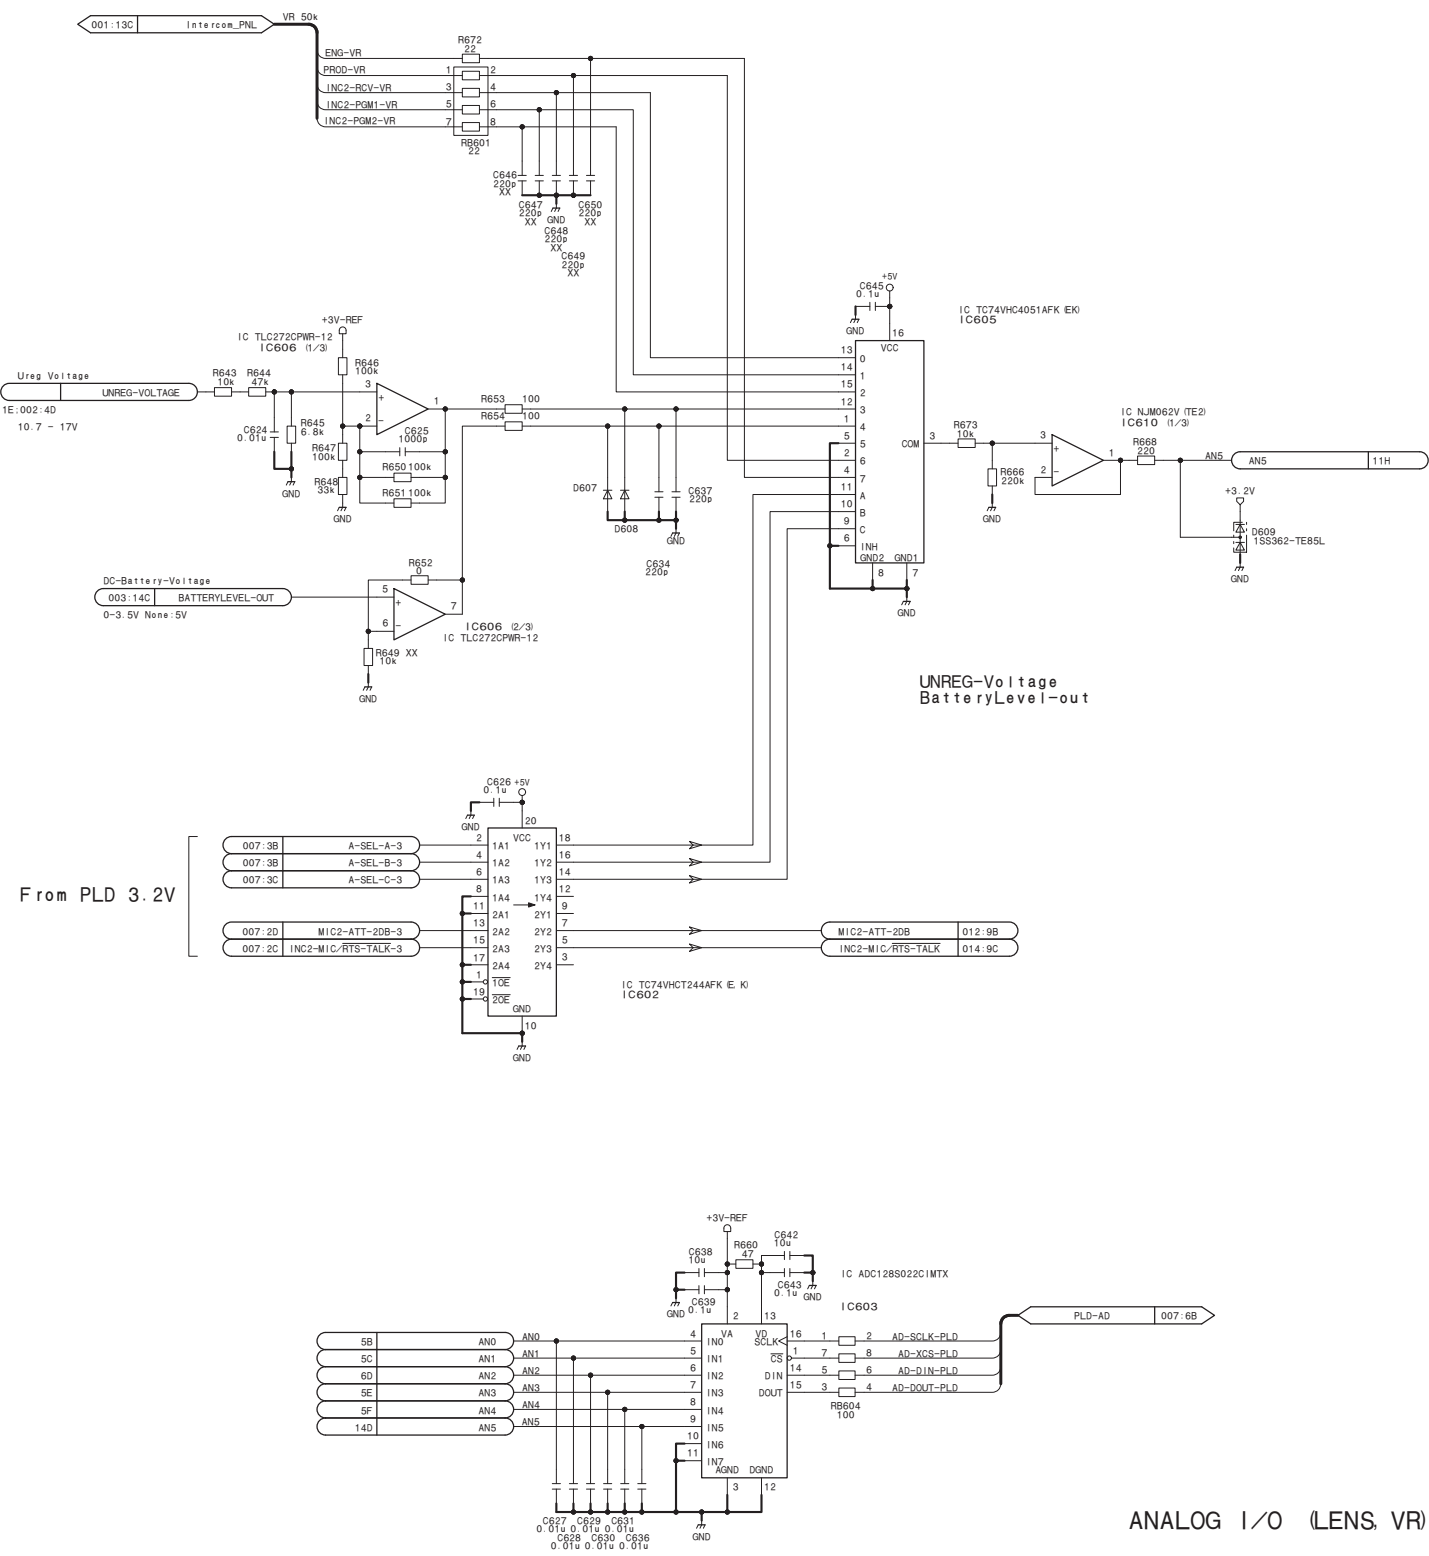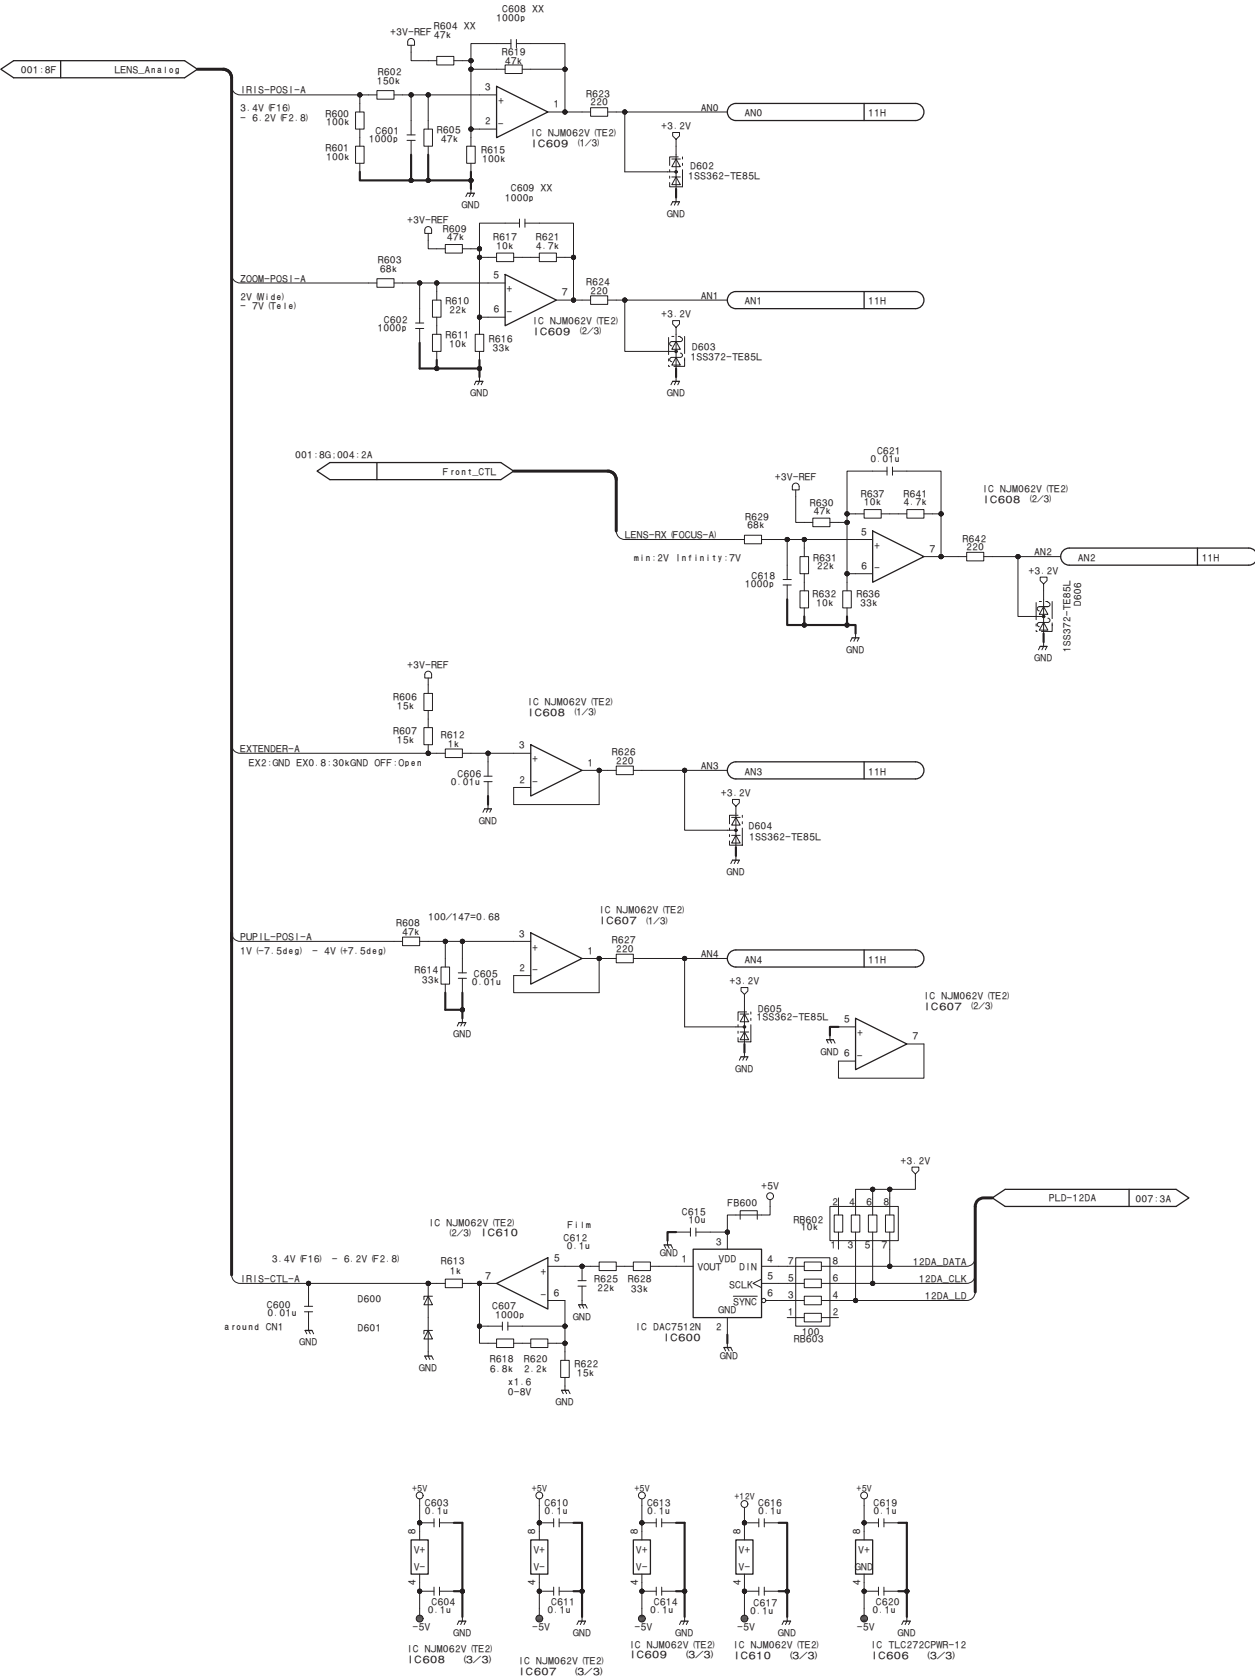

ANALOG I/O (LENS, VR)
SY-427 (6/14)
BOARD NO. 1-889-919-11
SY-427_6


SY-427 (7/14)

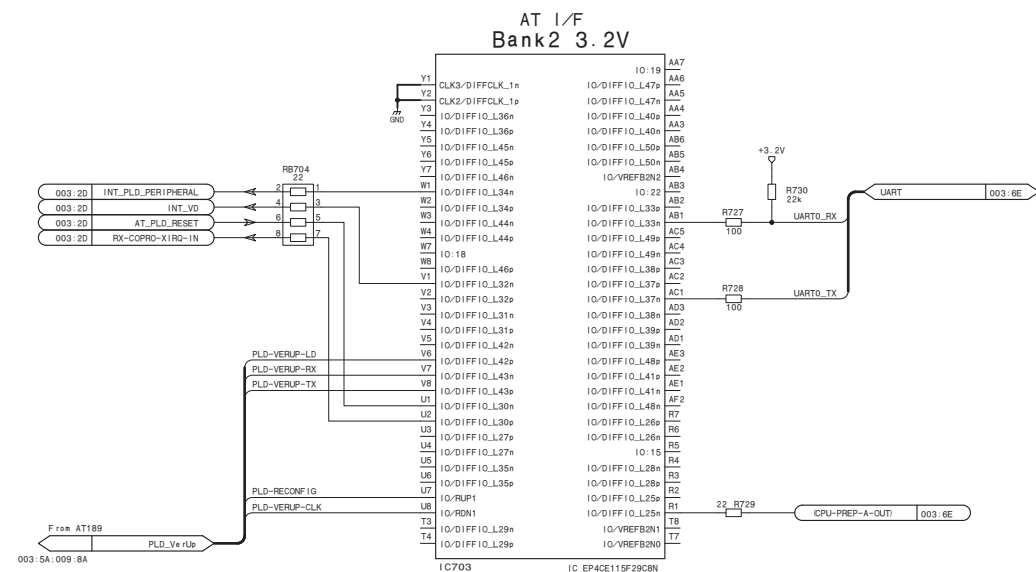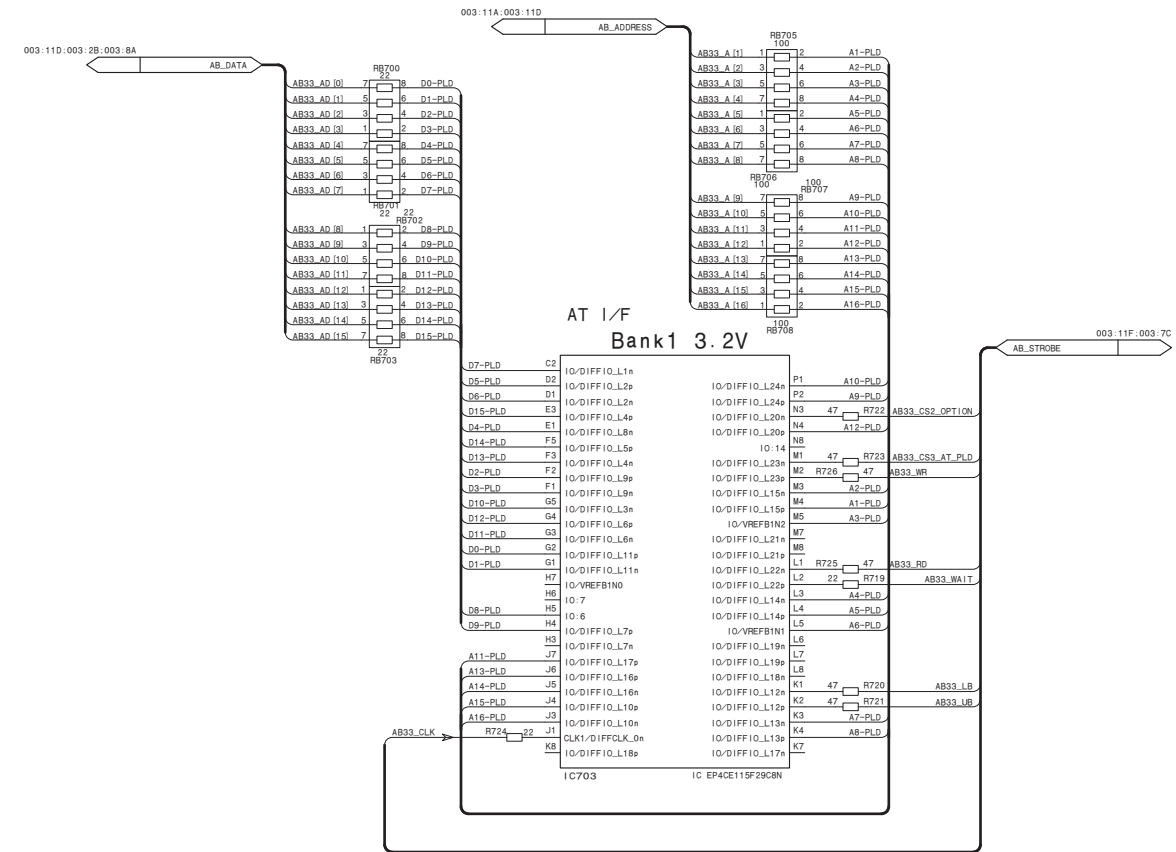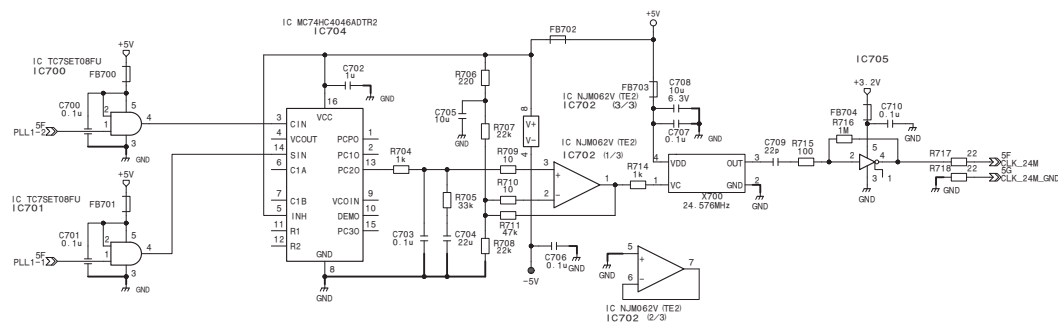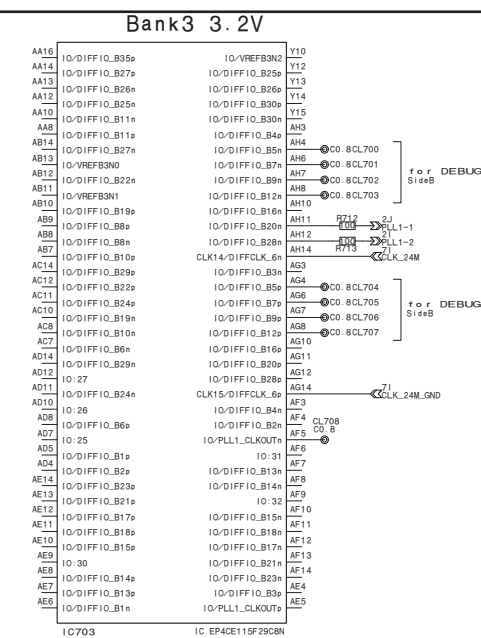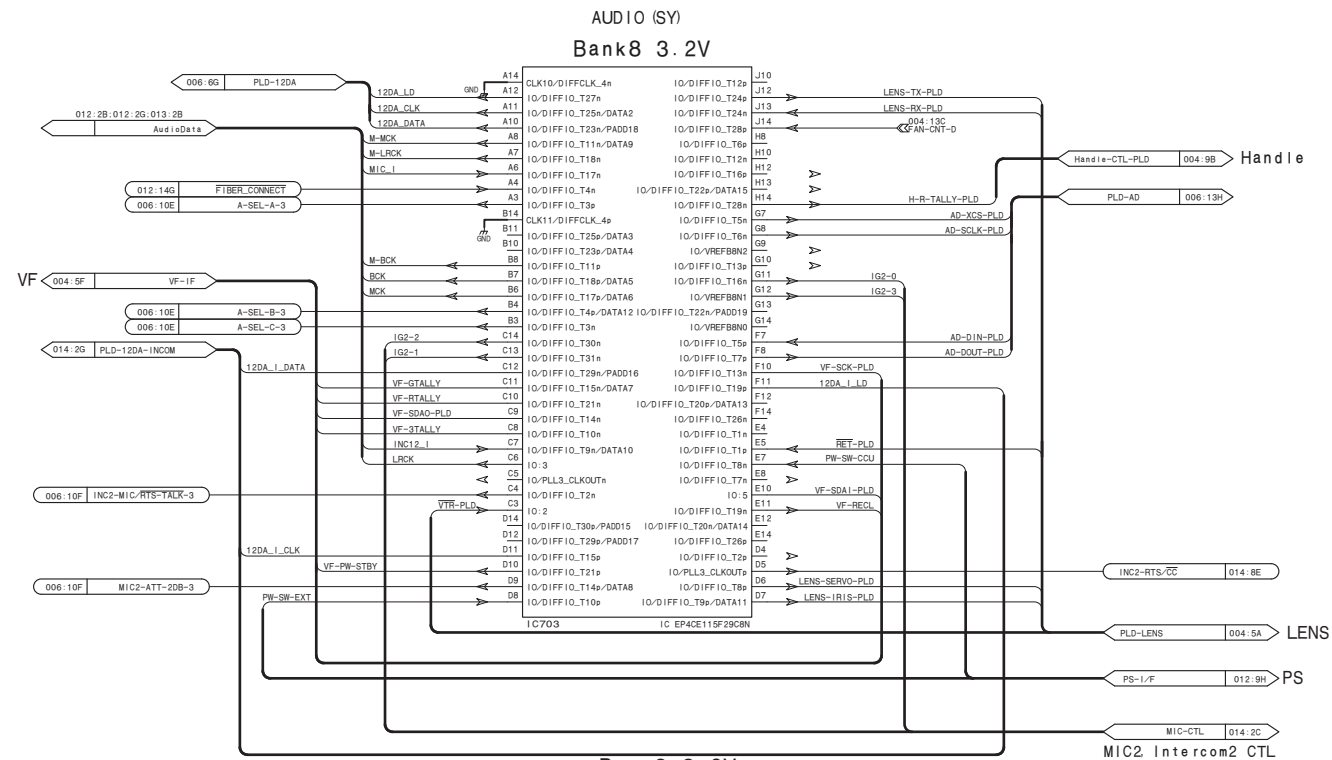

SY-PLD (1/3)





SY-427 (7/14)
BOARD NO. 1-889-919-11
SY-427_7

SY-427 (8/14)

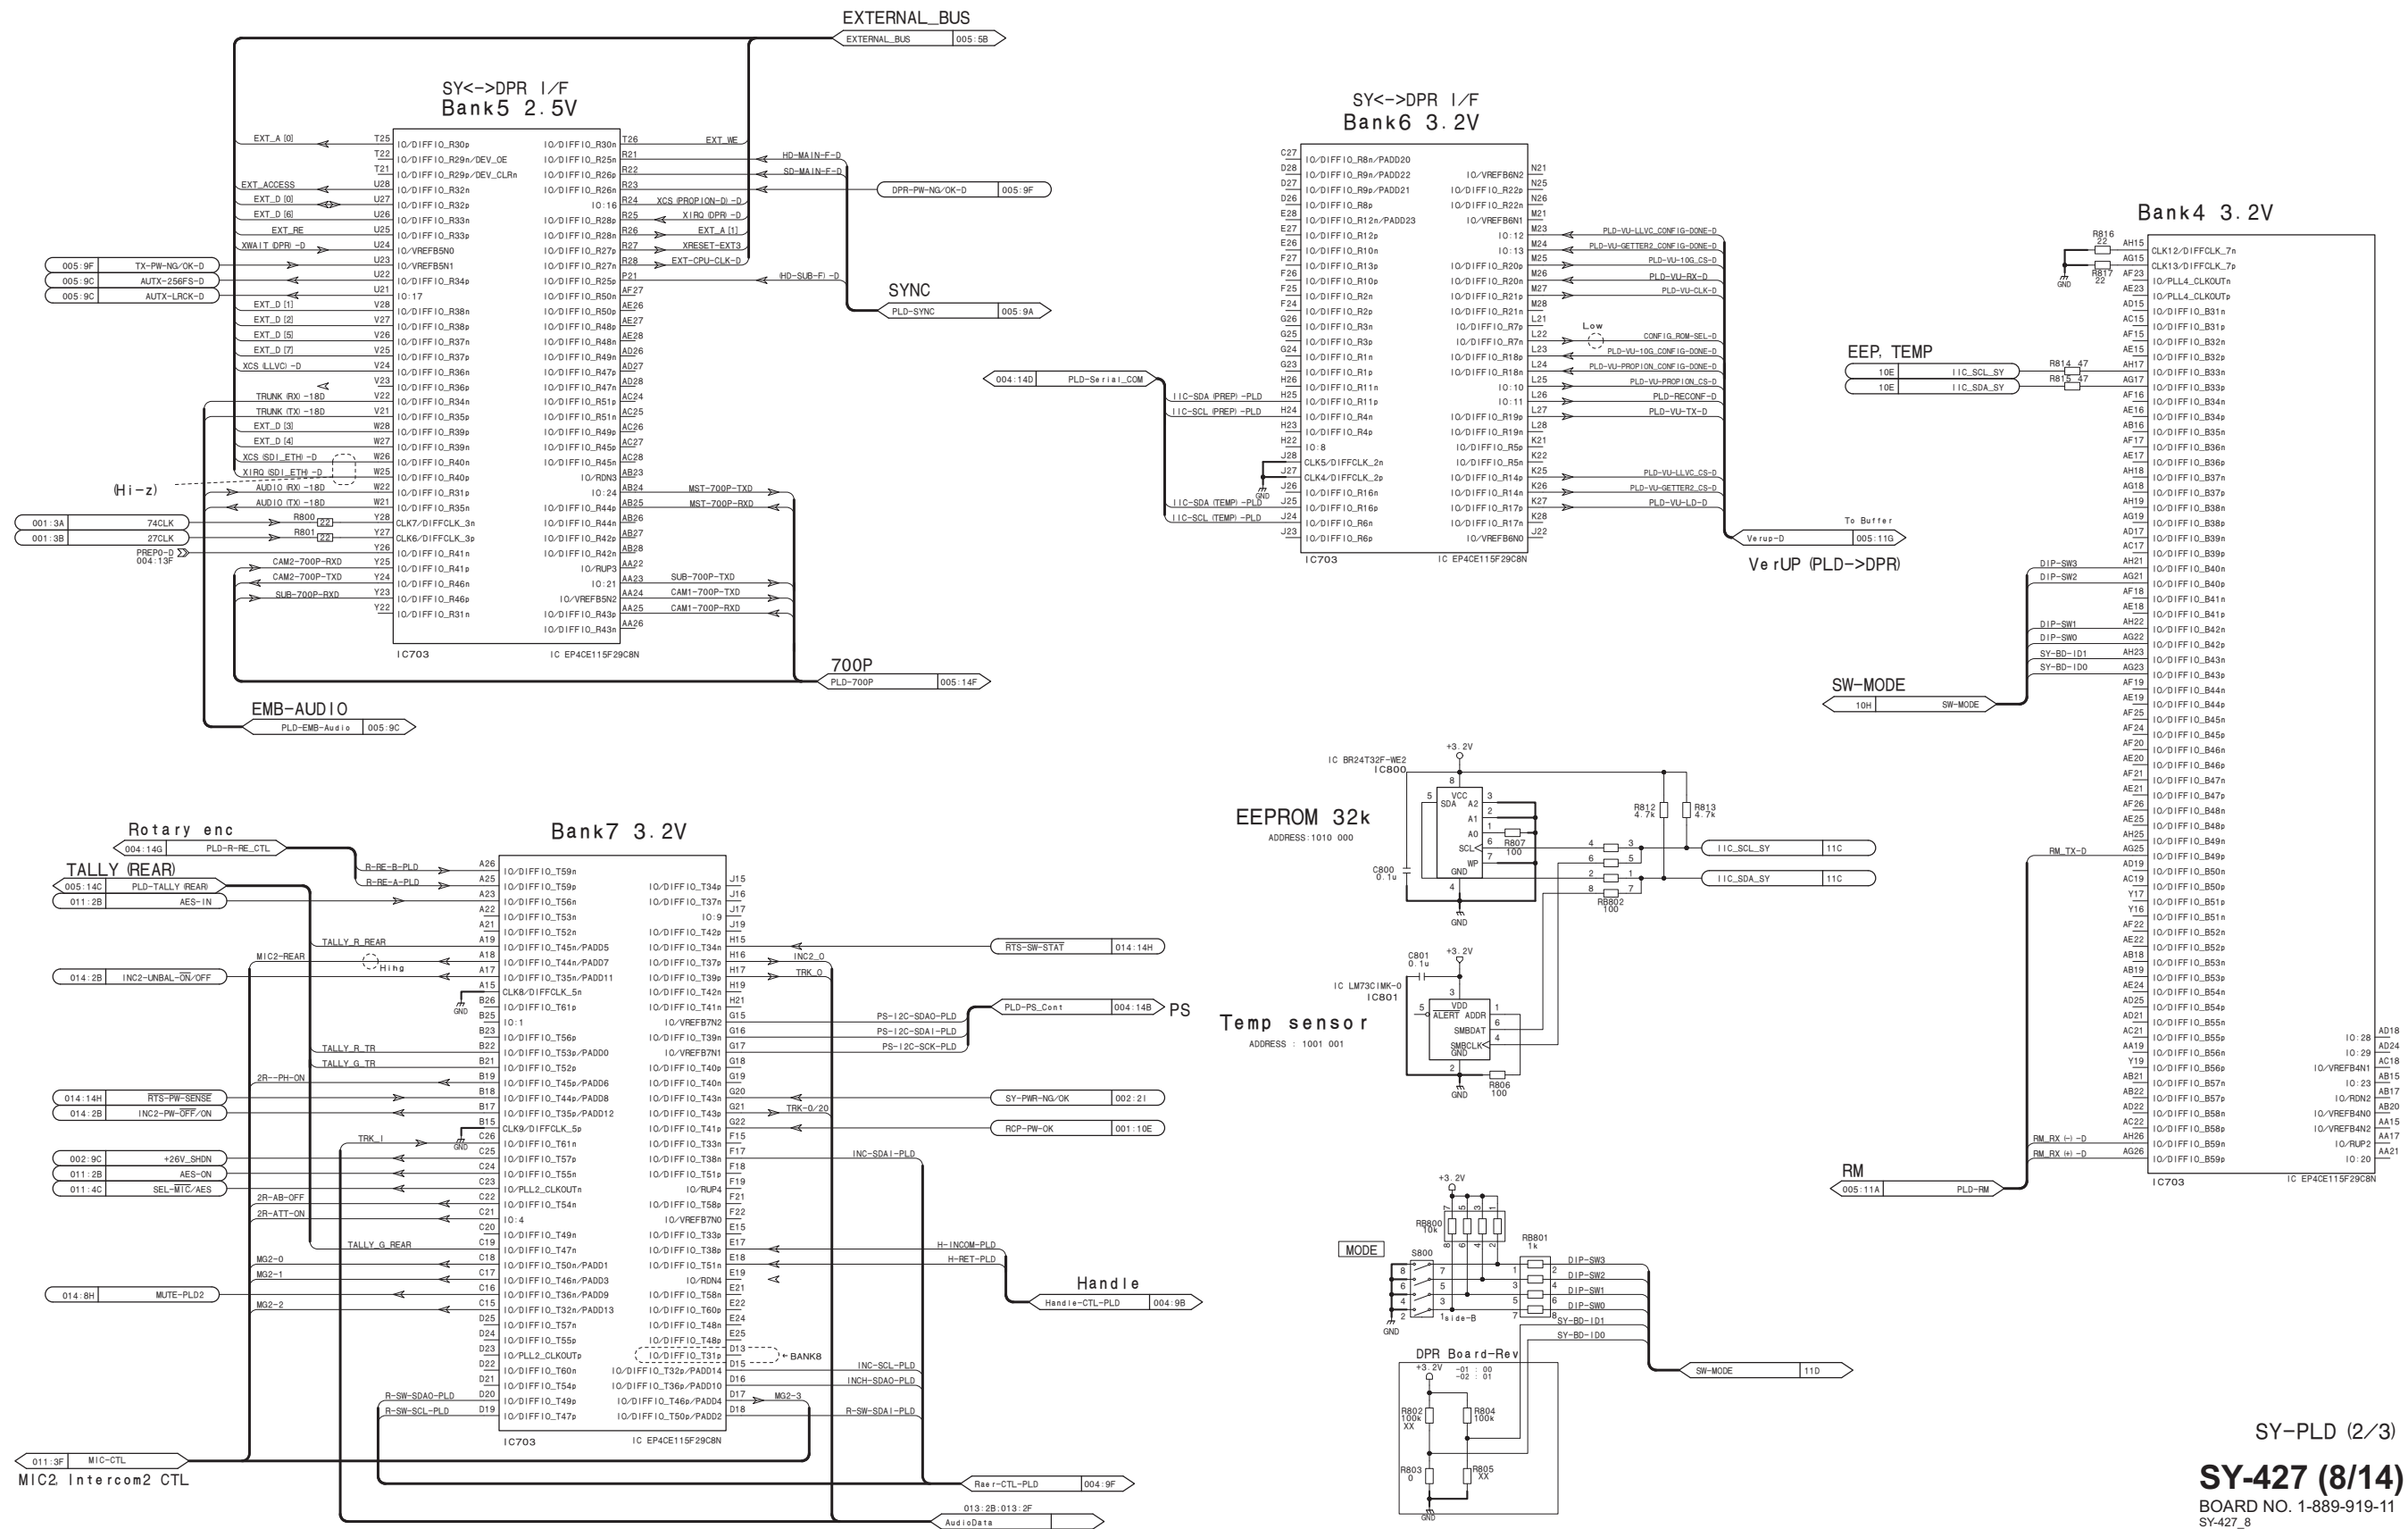






SY-427 (10/14)

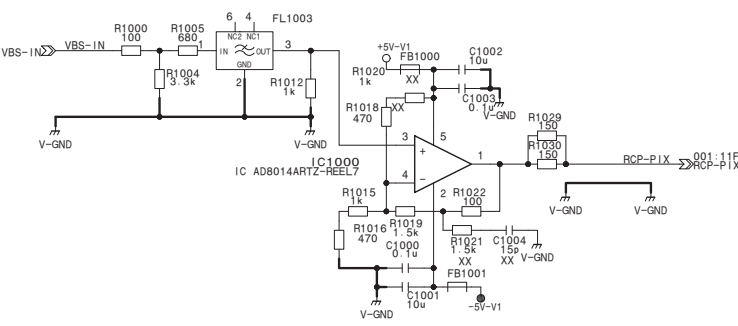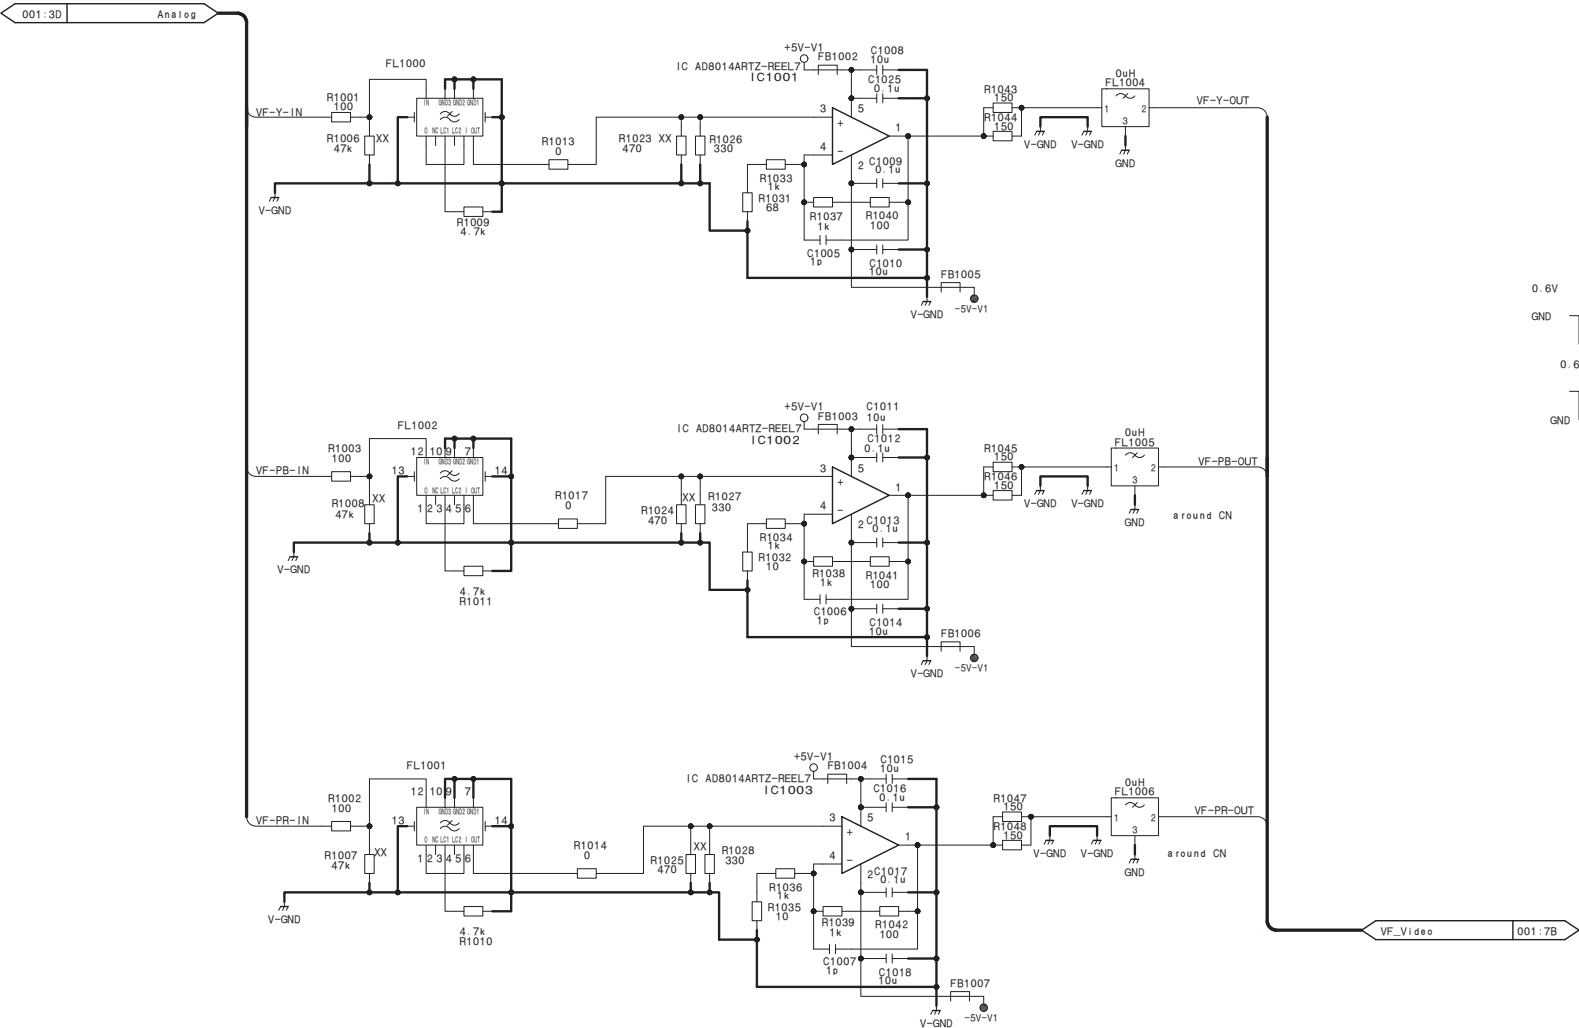

VF, RCP-P i x
SY-427 (10/14)
BOARD NO. 1-889-919-11
SY-427_10




SY-427 (12/14)

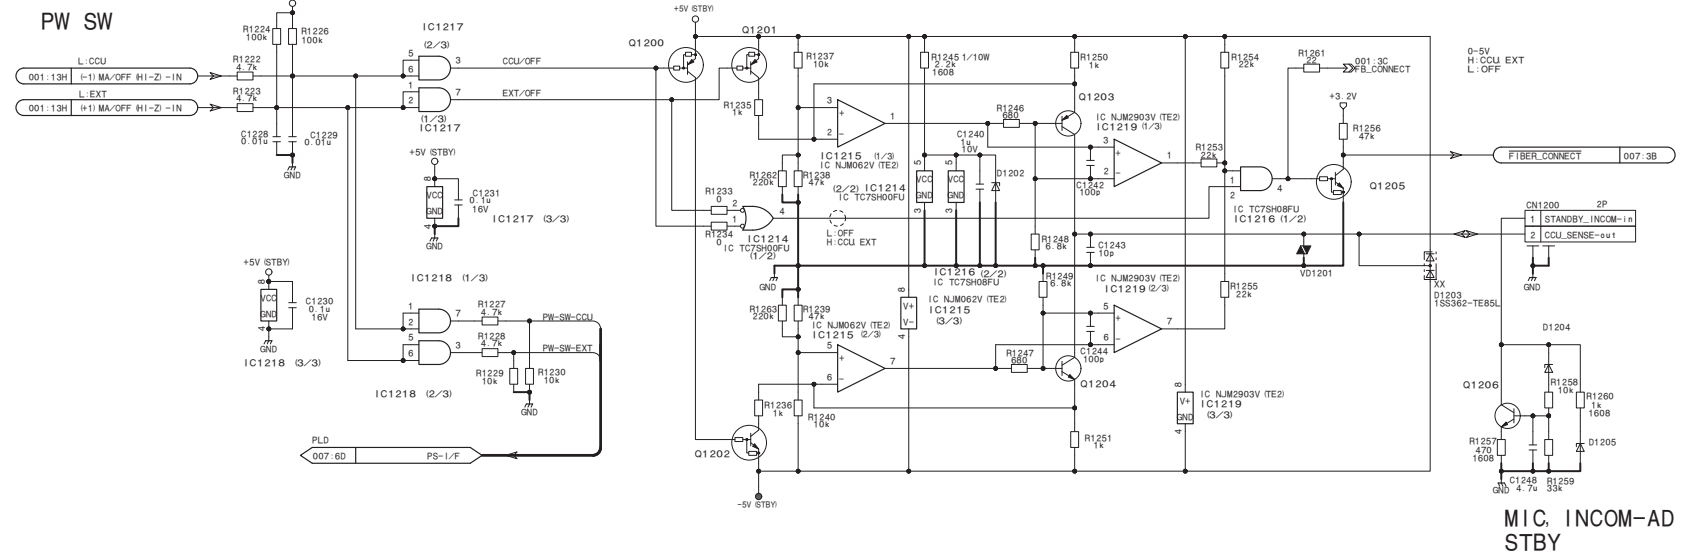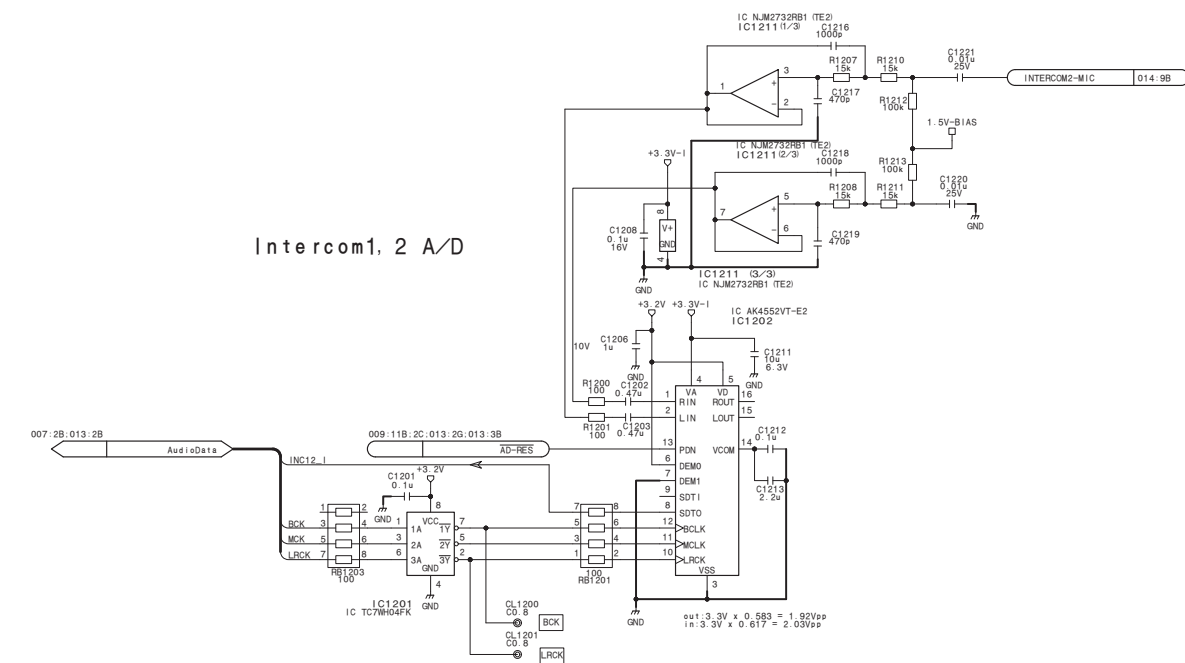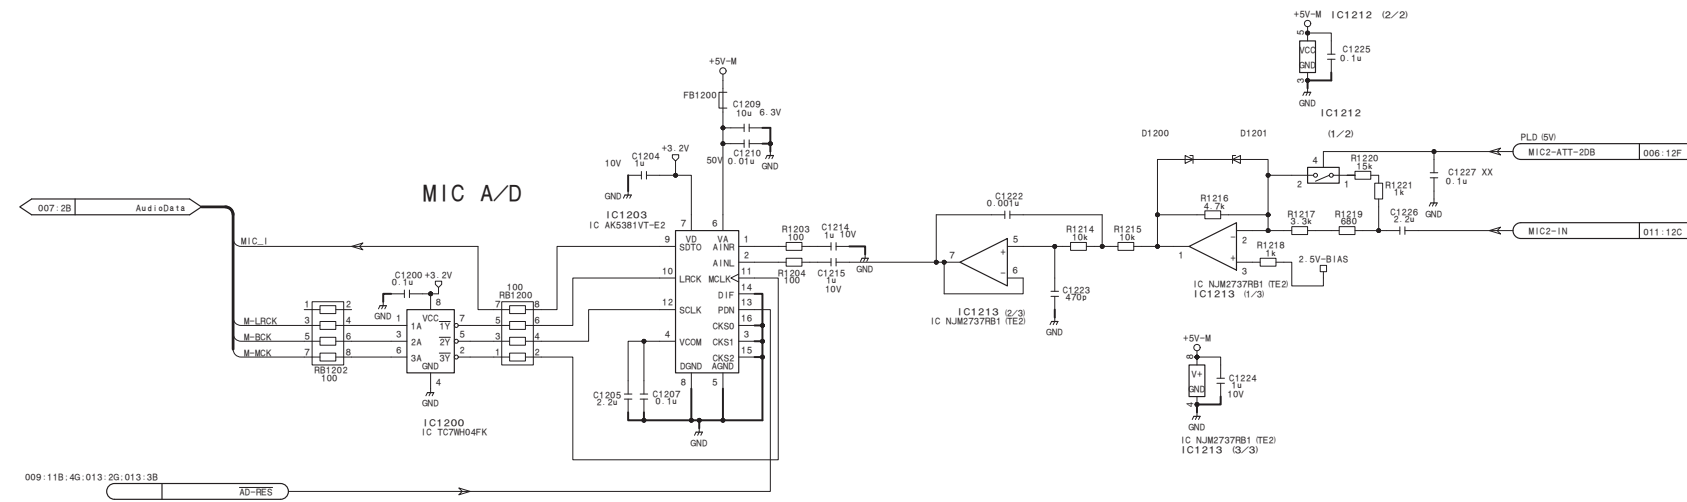



SY-427 (12/14)

BOARD NO. 1-889-919-11
SY-427_12




BOARD NO. 1-889-919-11
SY427_13



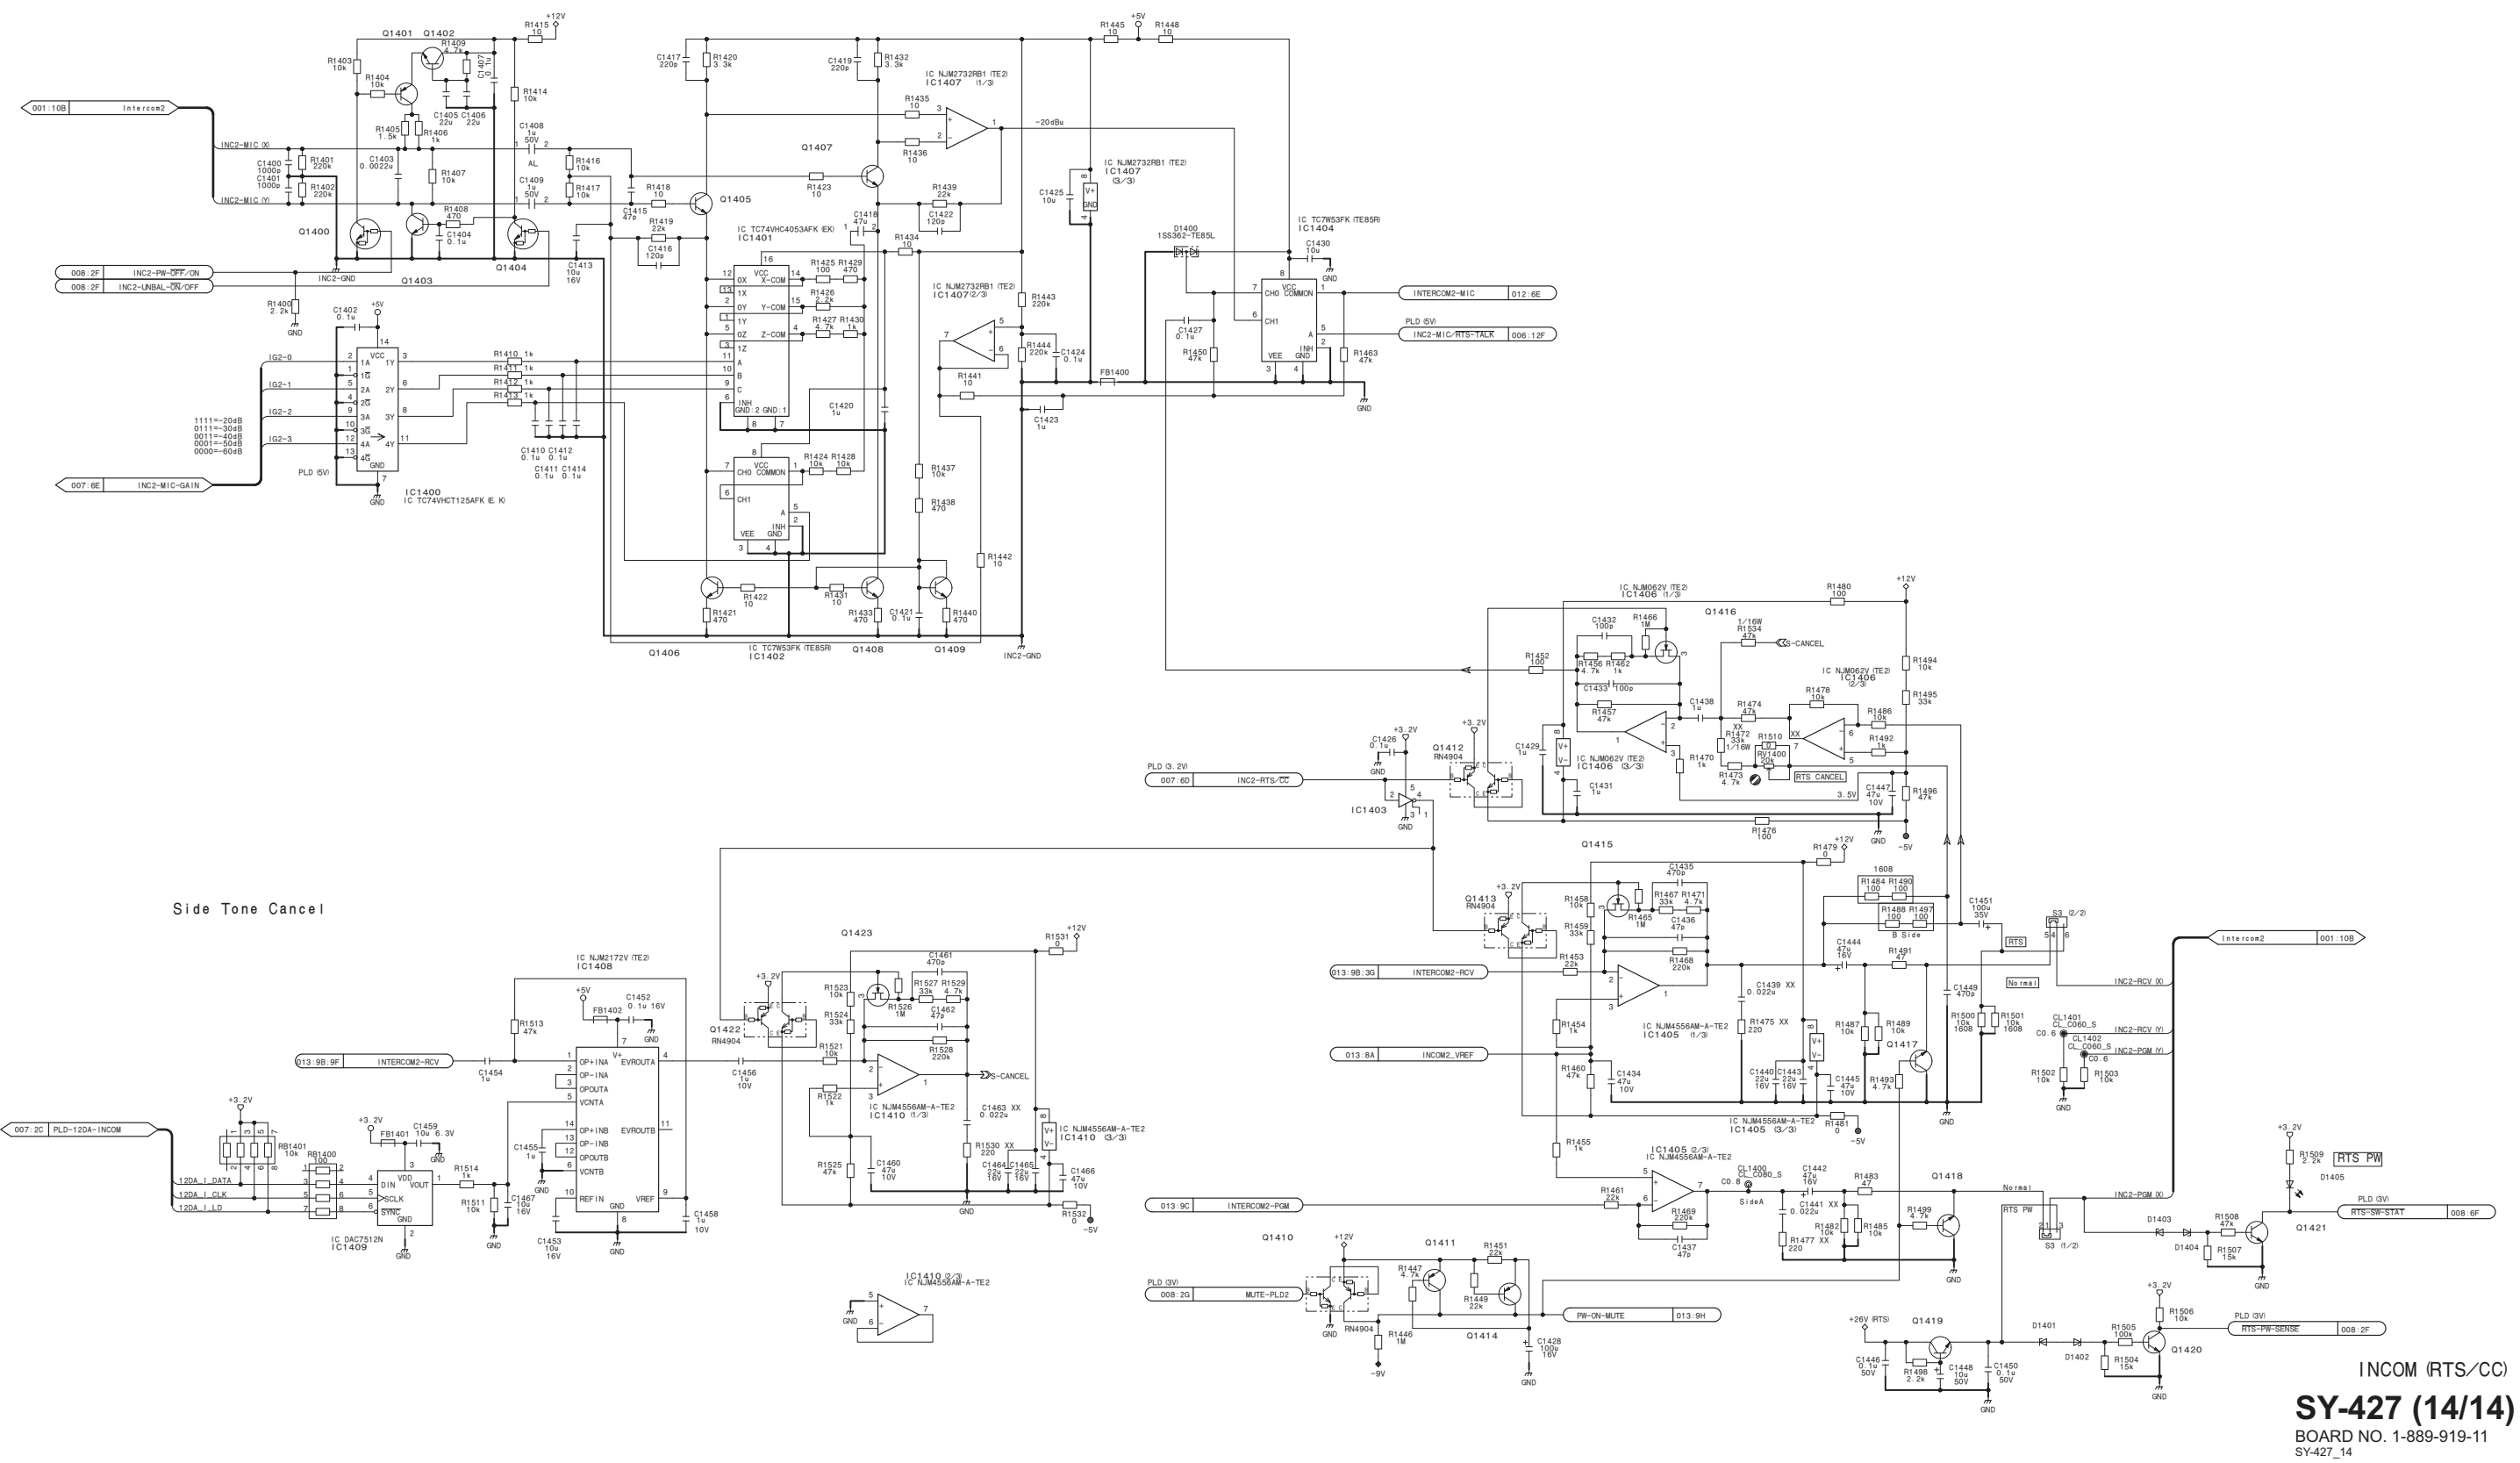

INCOM (RTS/CC)
SY-427 (14/14)
BOARD NO. 1-889-919-11
SY-427_14






TX-146
TX-146 (1/8)

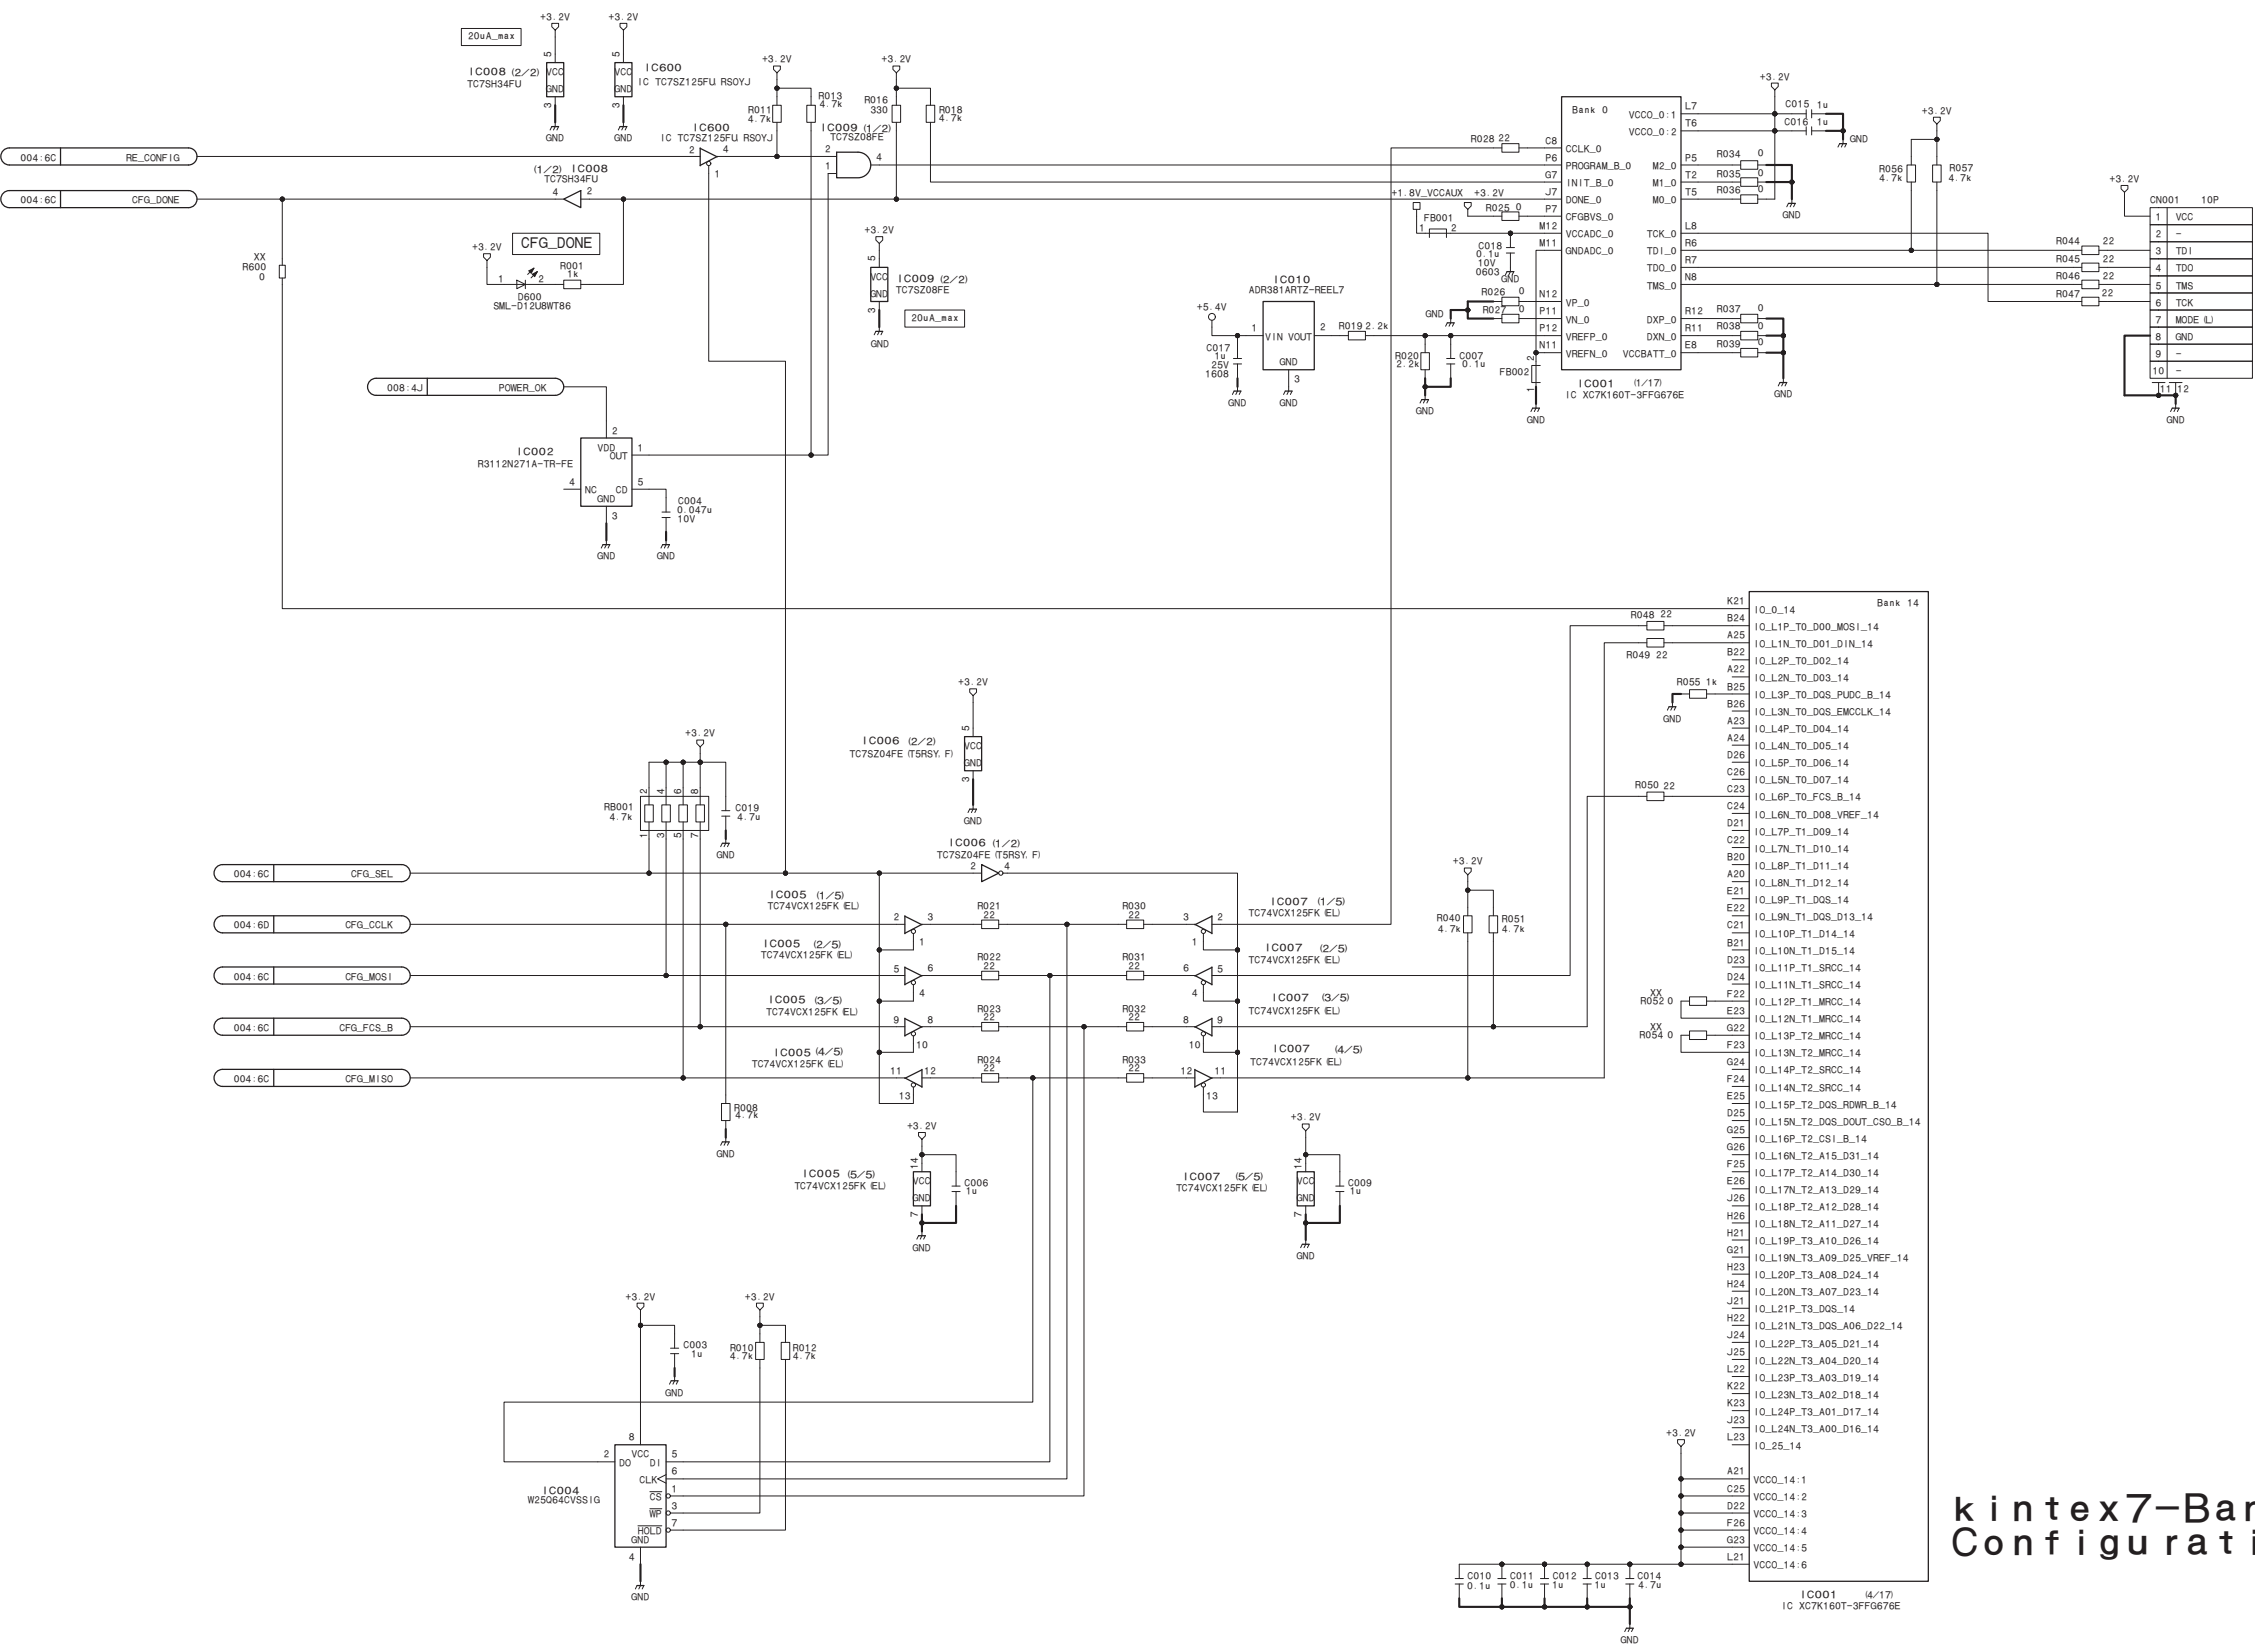

kintex7-Bank0 (3.3V) , 14 (3.3V) ,
Configuration-1/F

TX-146 (1/8)
BOARD NO. 1-889-872-11
TX-146_2



TX-146 (2/8)

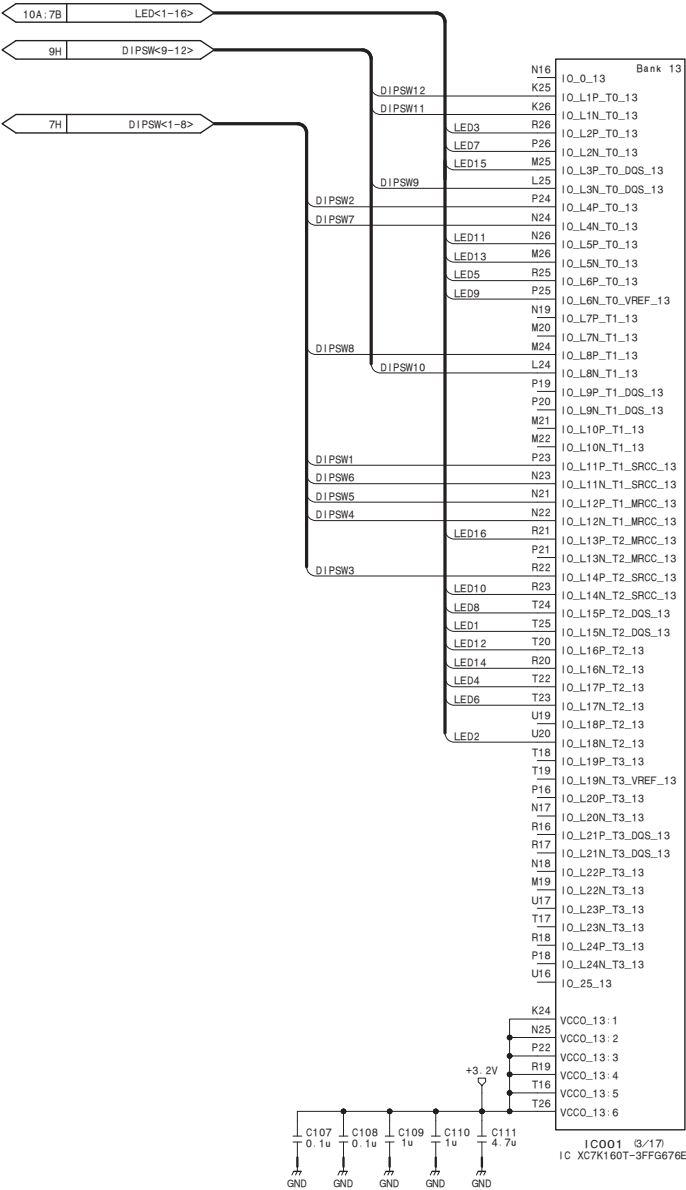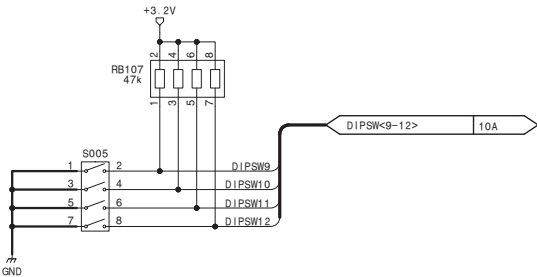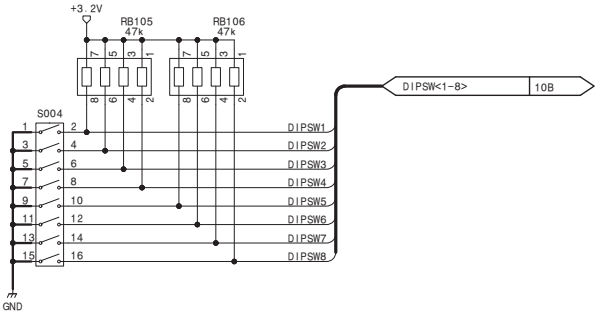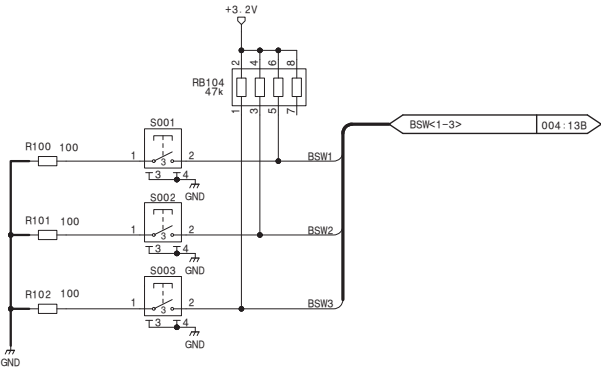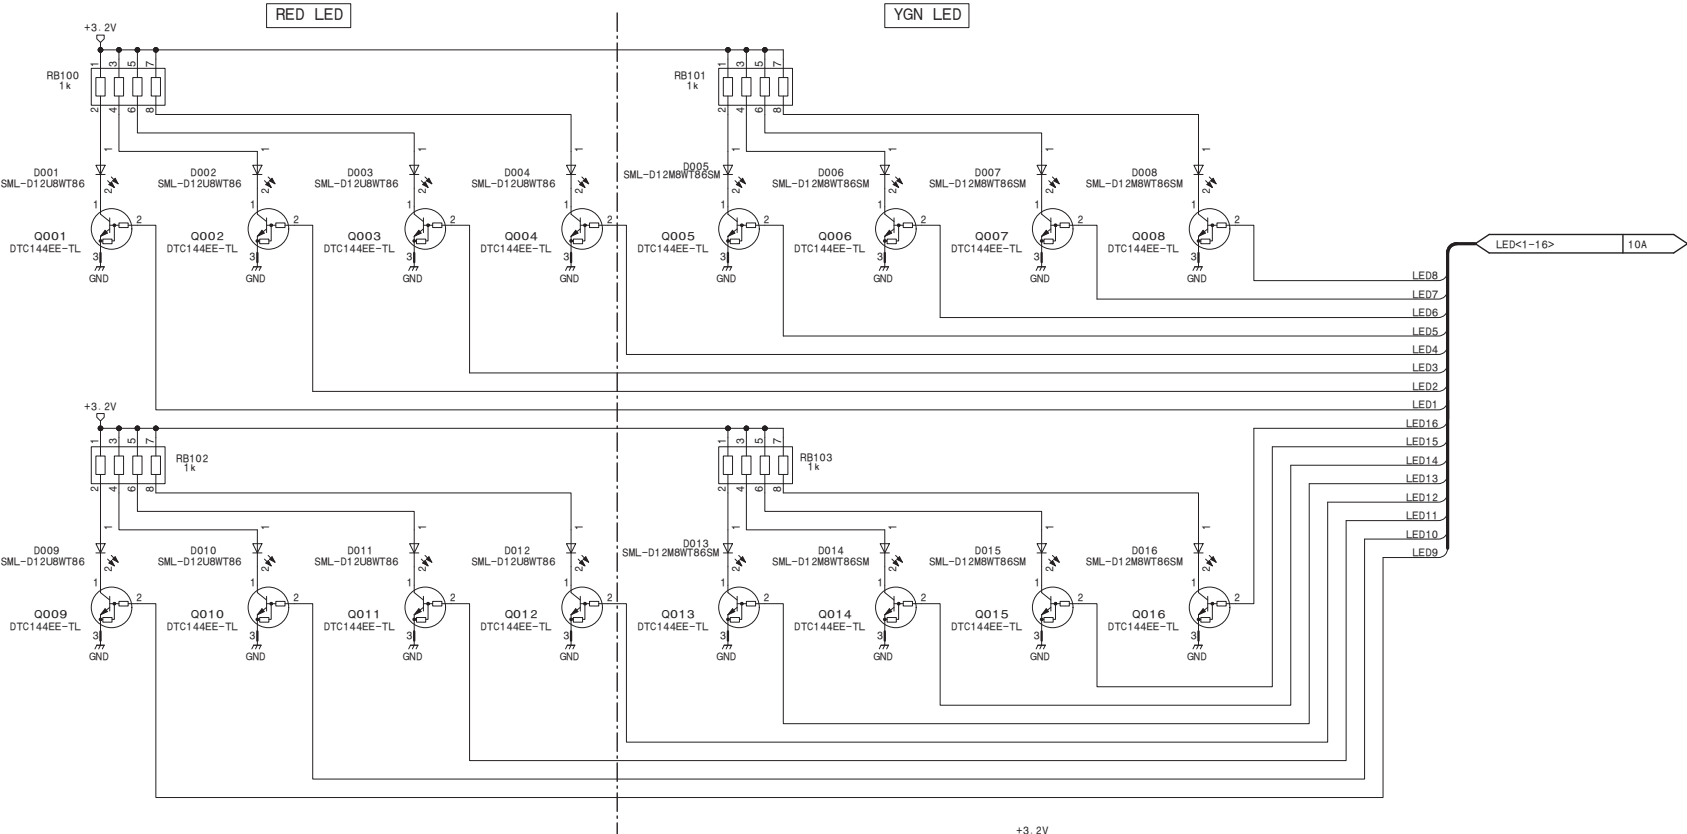

kintex7-Bank13 (3.3V),
LED, ButtonSW, DIPSW

TX-146 (2/8)
BOARD NO. 1-889-872-11
TX-146_3


TX-146 (3/8)

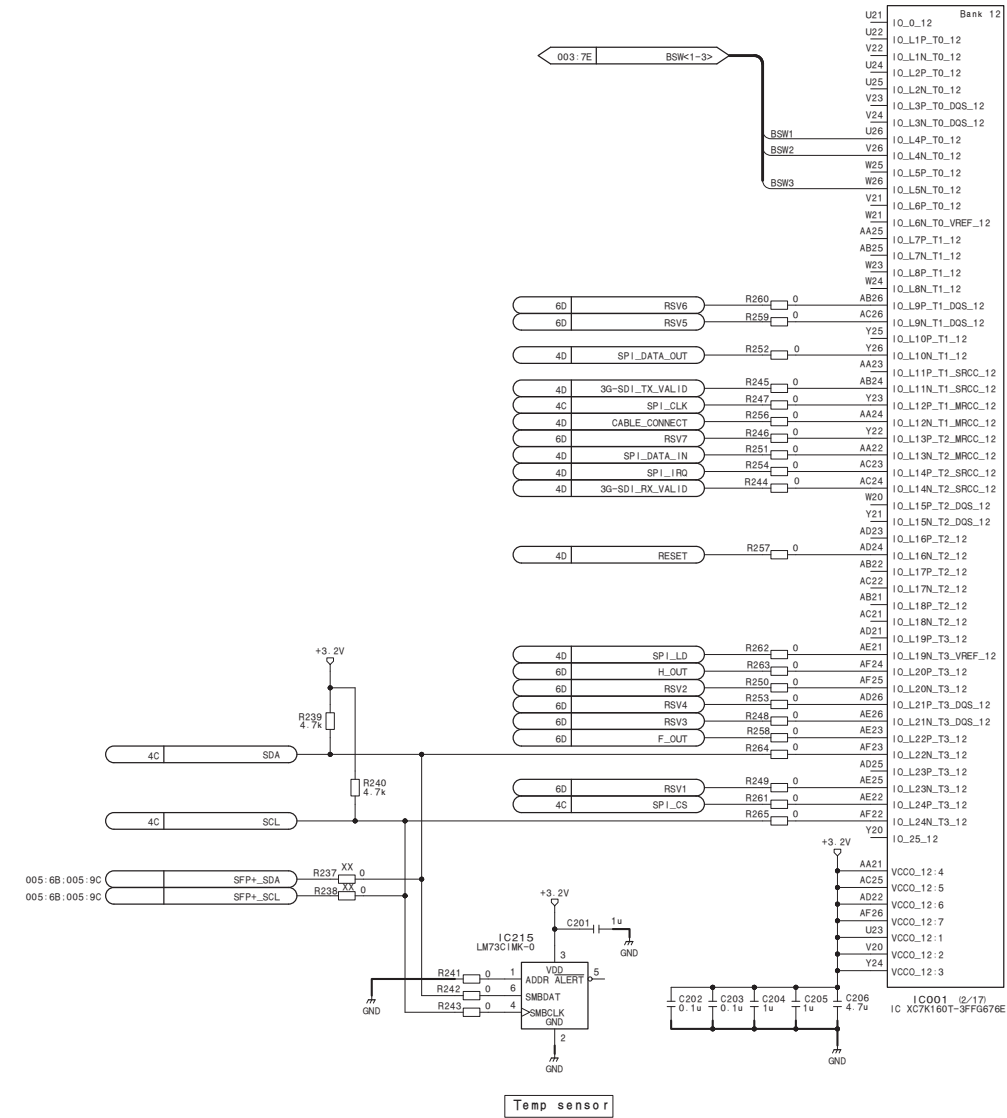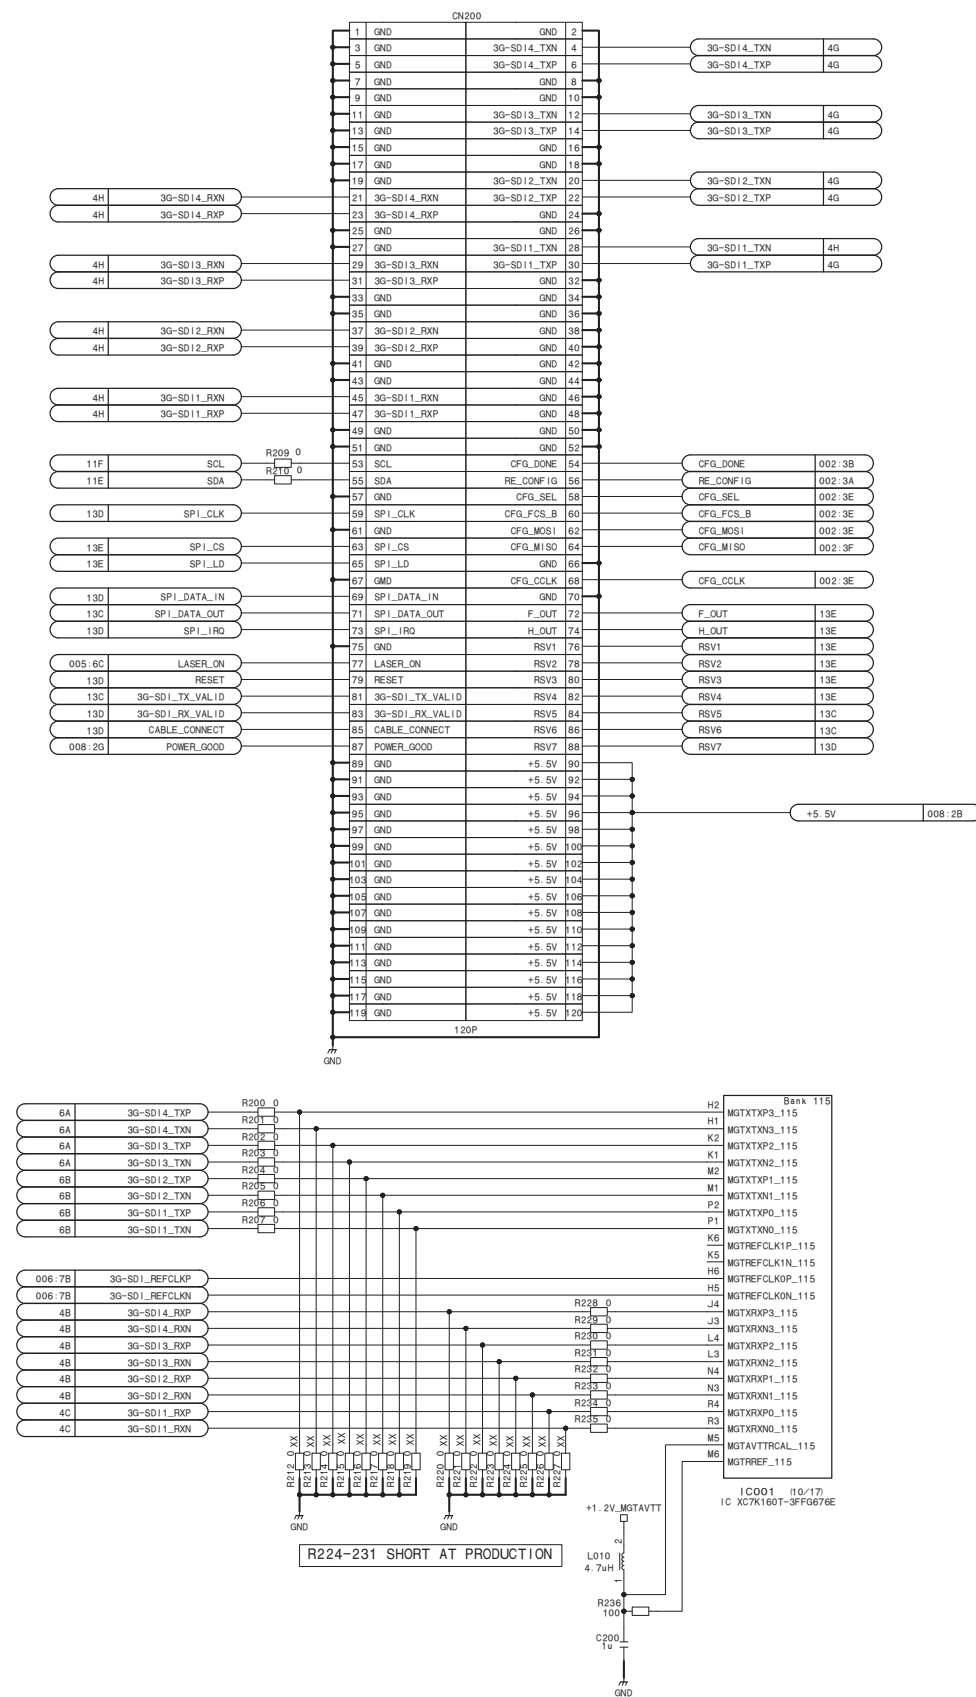

Kintex7-Bank12 (3.3v), 115 (3G-SDI),
Temp Sensor, I2C, 120Pin-Connector



TX-146 (3/8)
BOARD NO. 1-889-872-11
TX-146_4

TX-146 (4/8)





1.3um SFP+

330mA_max

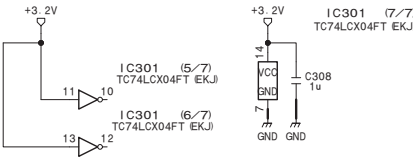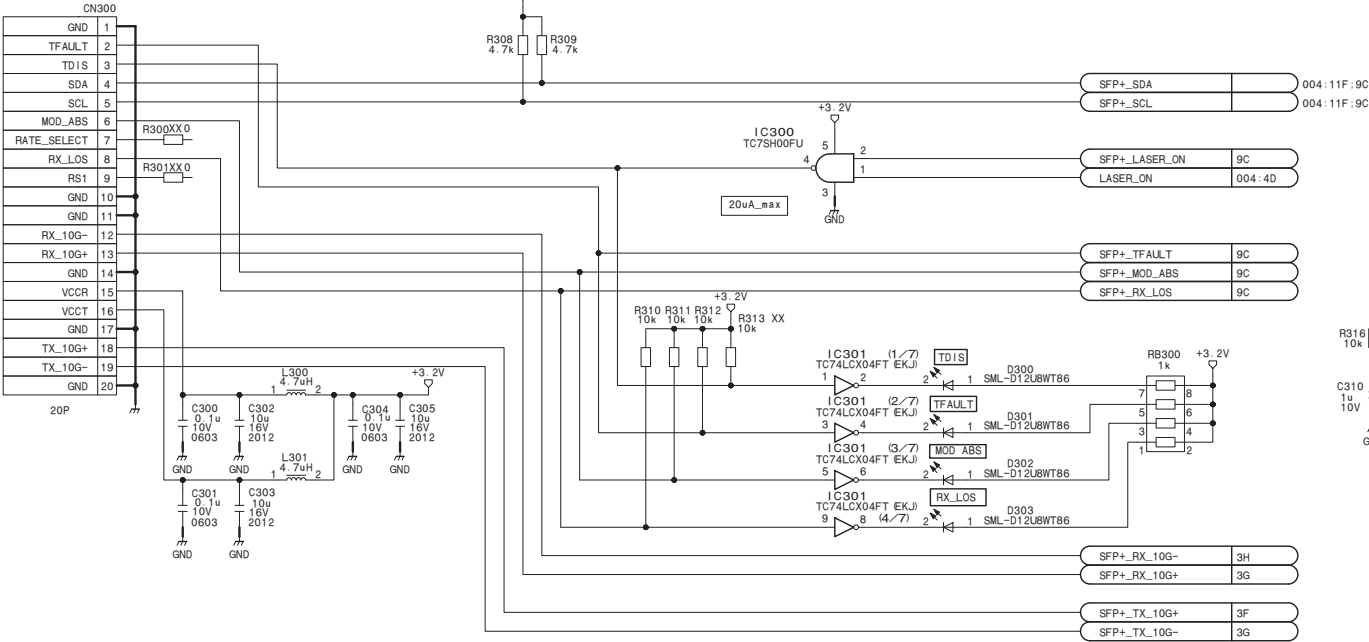

10uA_max

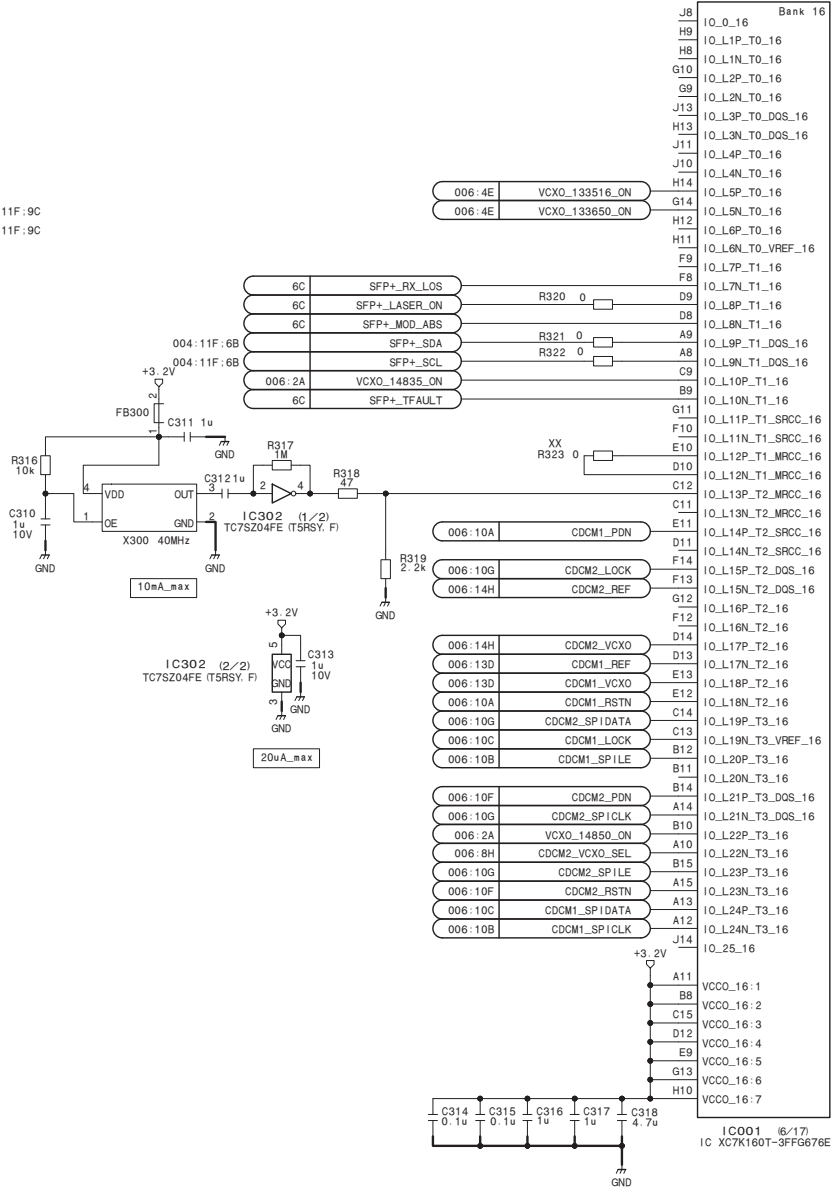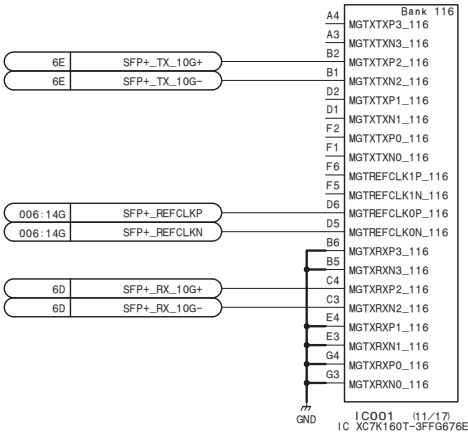


Kintex7-Bank15 (3.3v) , 16 (3.3v) , 116 (SFP+) , SFP+, 40M_CLK

TX-146 (4/8)


BOARD NO. 1-889-872-11
TX-146_5

TX-146 (5/8)

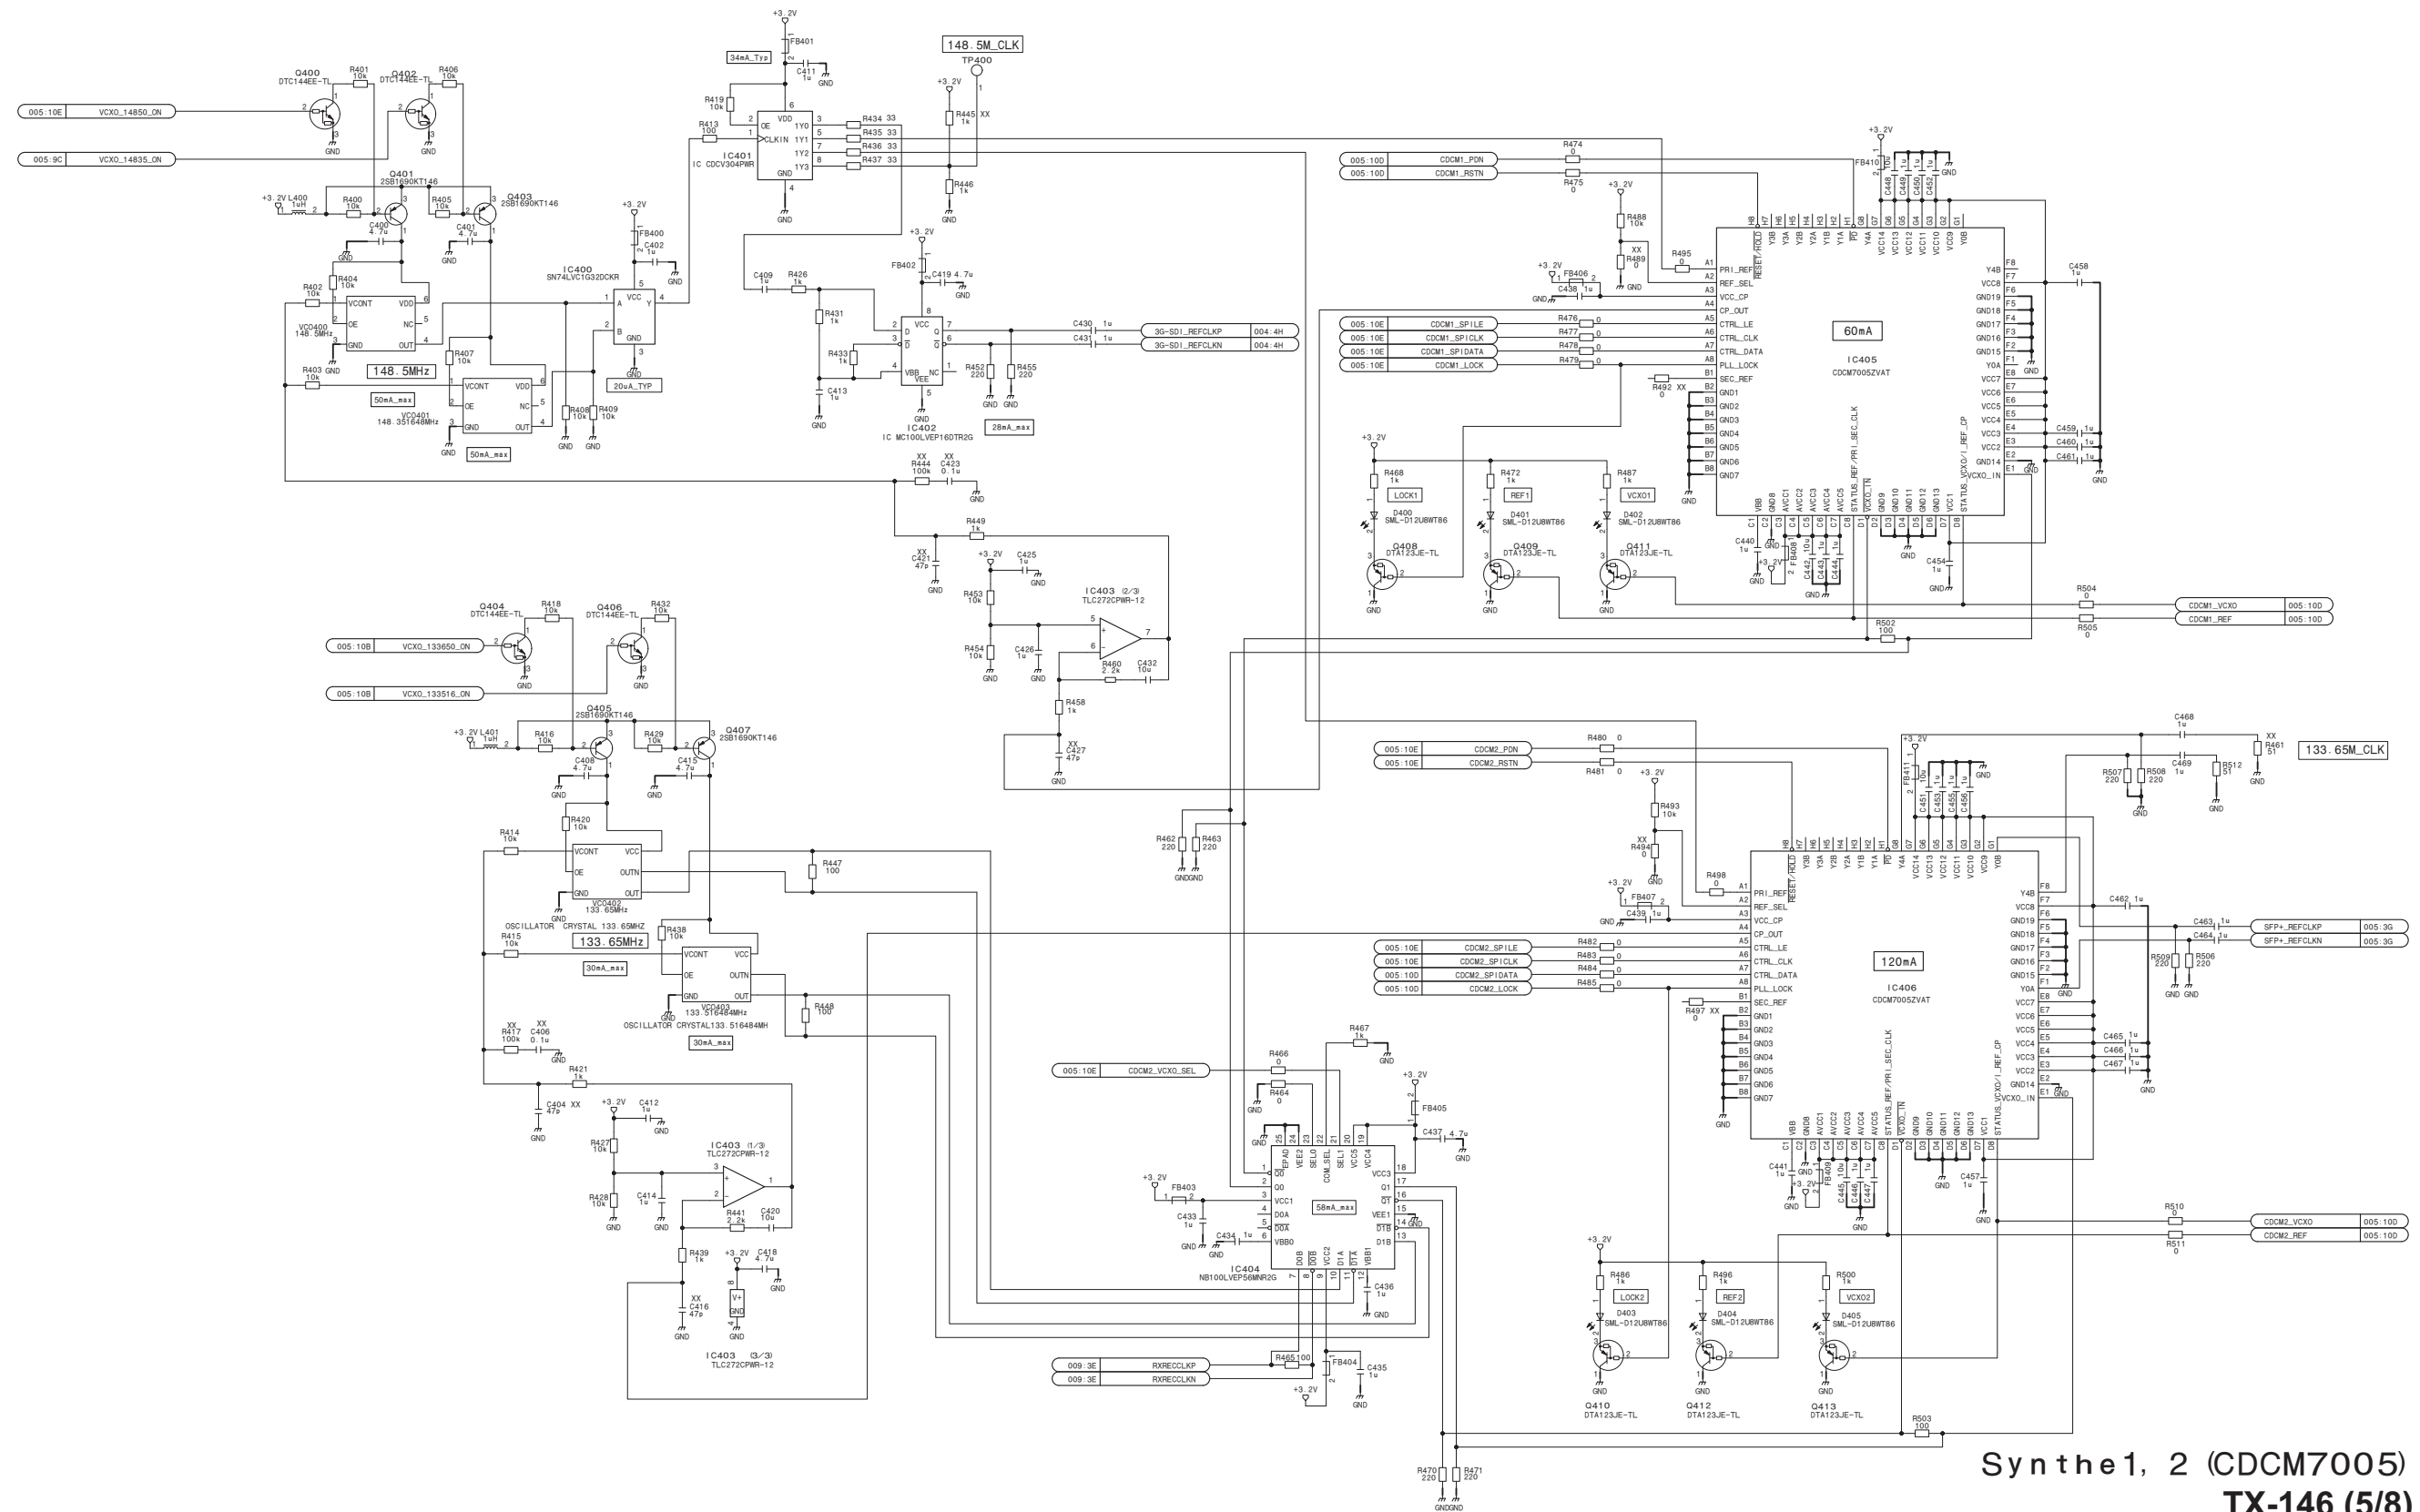

Synthe 1, 2 (CDCM7005)
TX-146 (5/8)
BOARD NO. 1-889-872-11
TX-146_6


TX-146 (6/8)

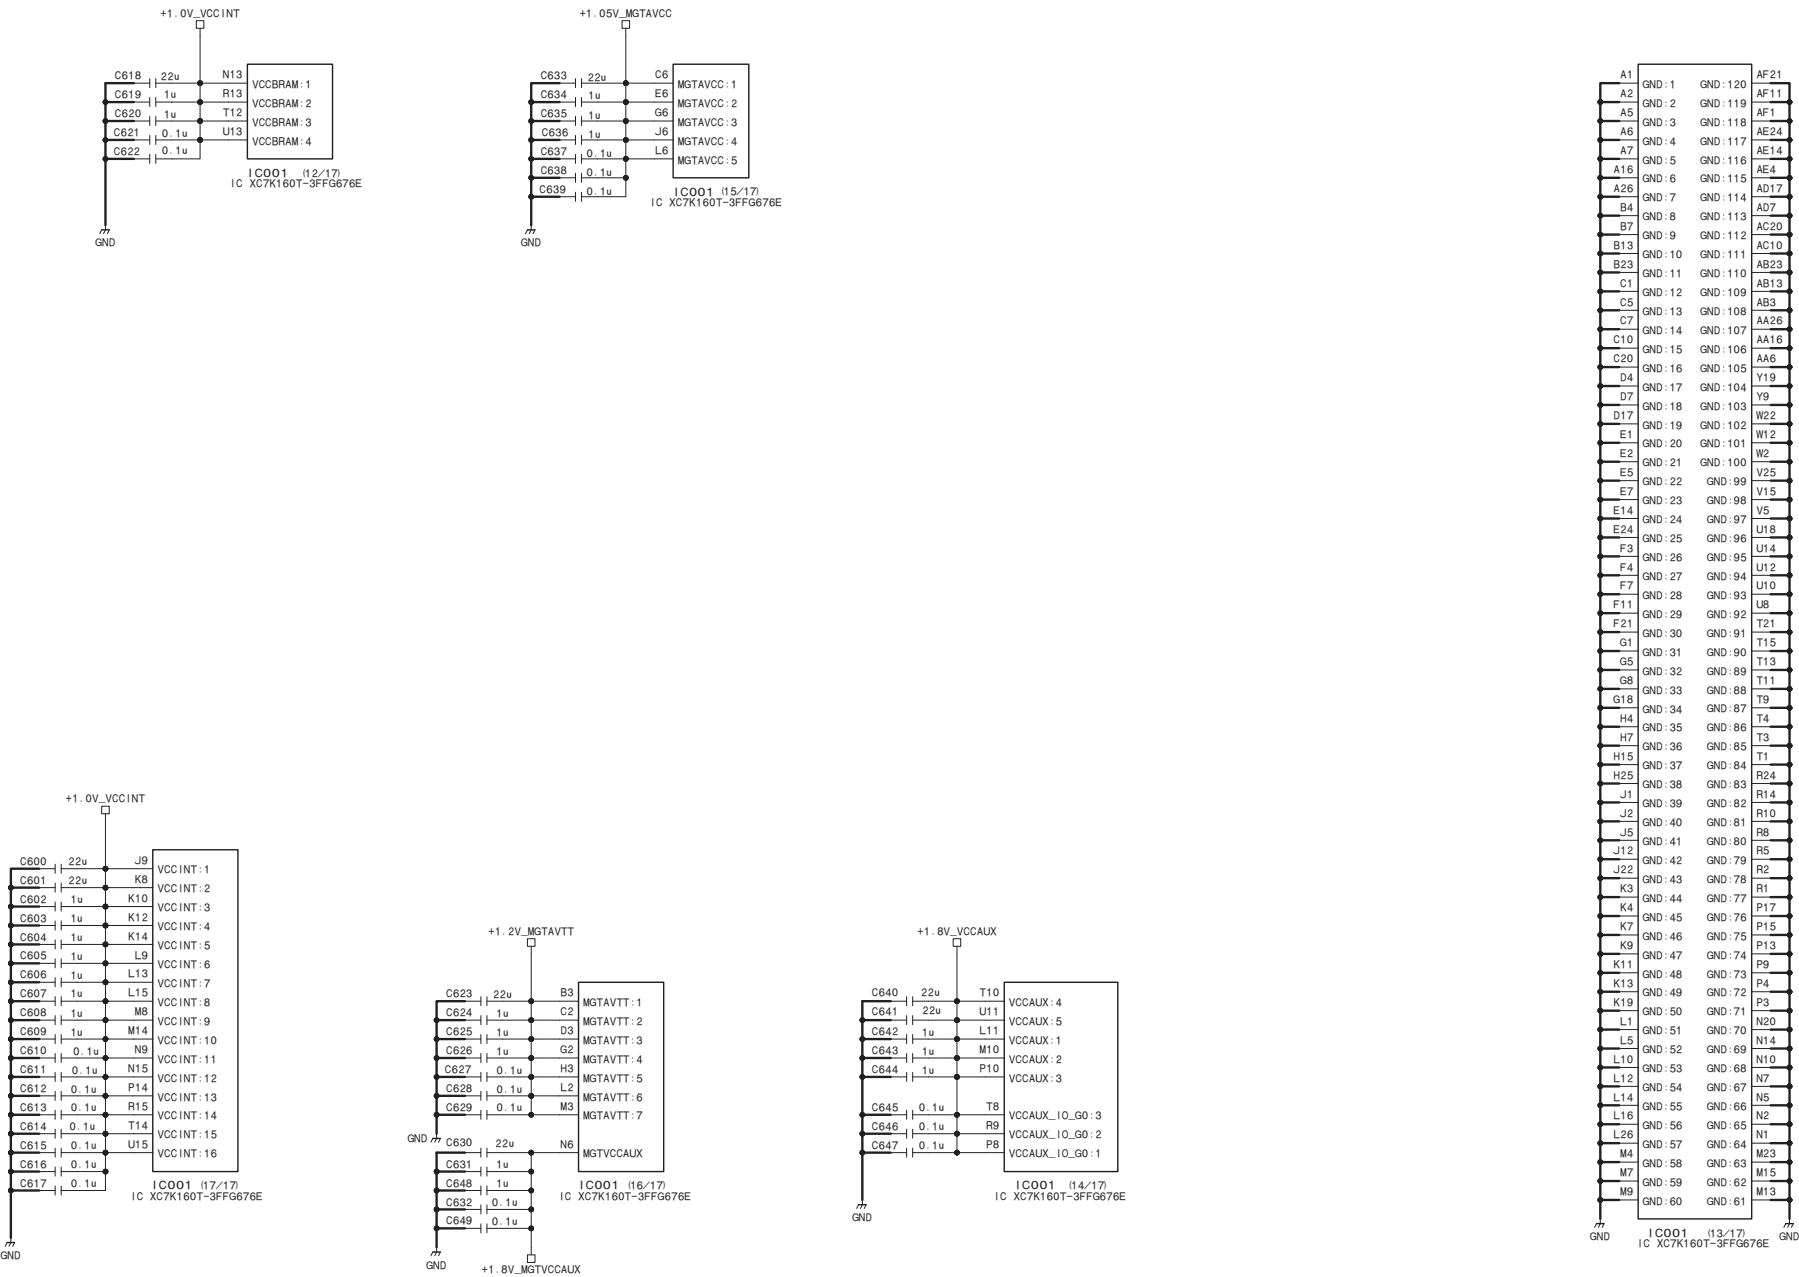




K i n t e x 7 – G N D , V C C I N T (1 . 0 V) , V C C B R A M (1 . 0 V) ,
M G T A V C C (1 . 0 5 V) , M G T A V T T (1 . 2 V) , V C C A U X (1 . 8 V)

TX-146 (6/8)

BOARD NO. 1-889-872-11
TX-146_7

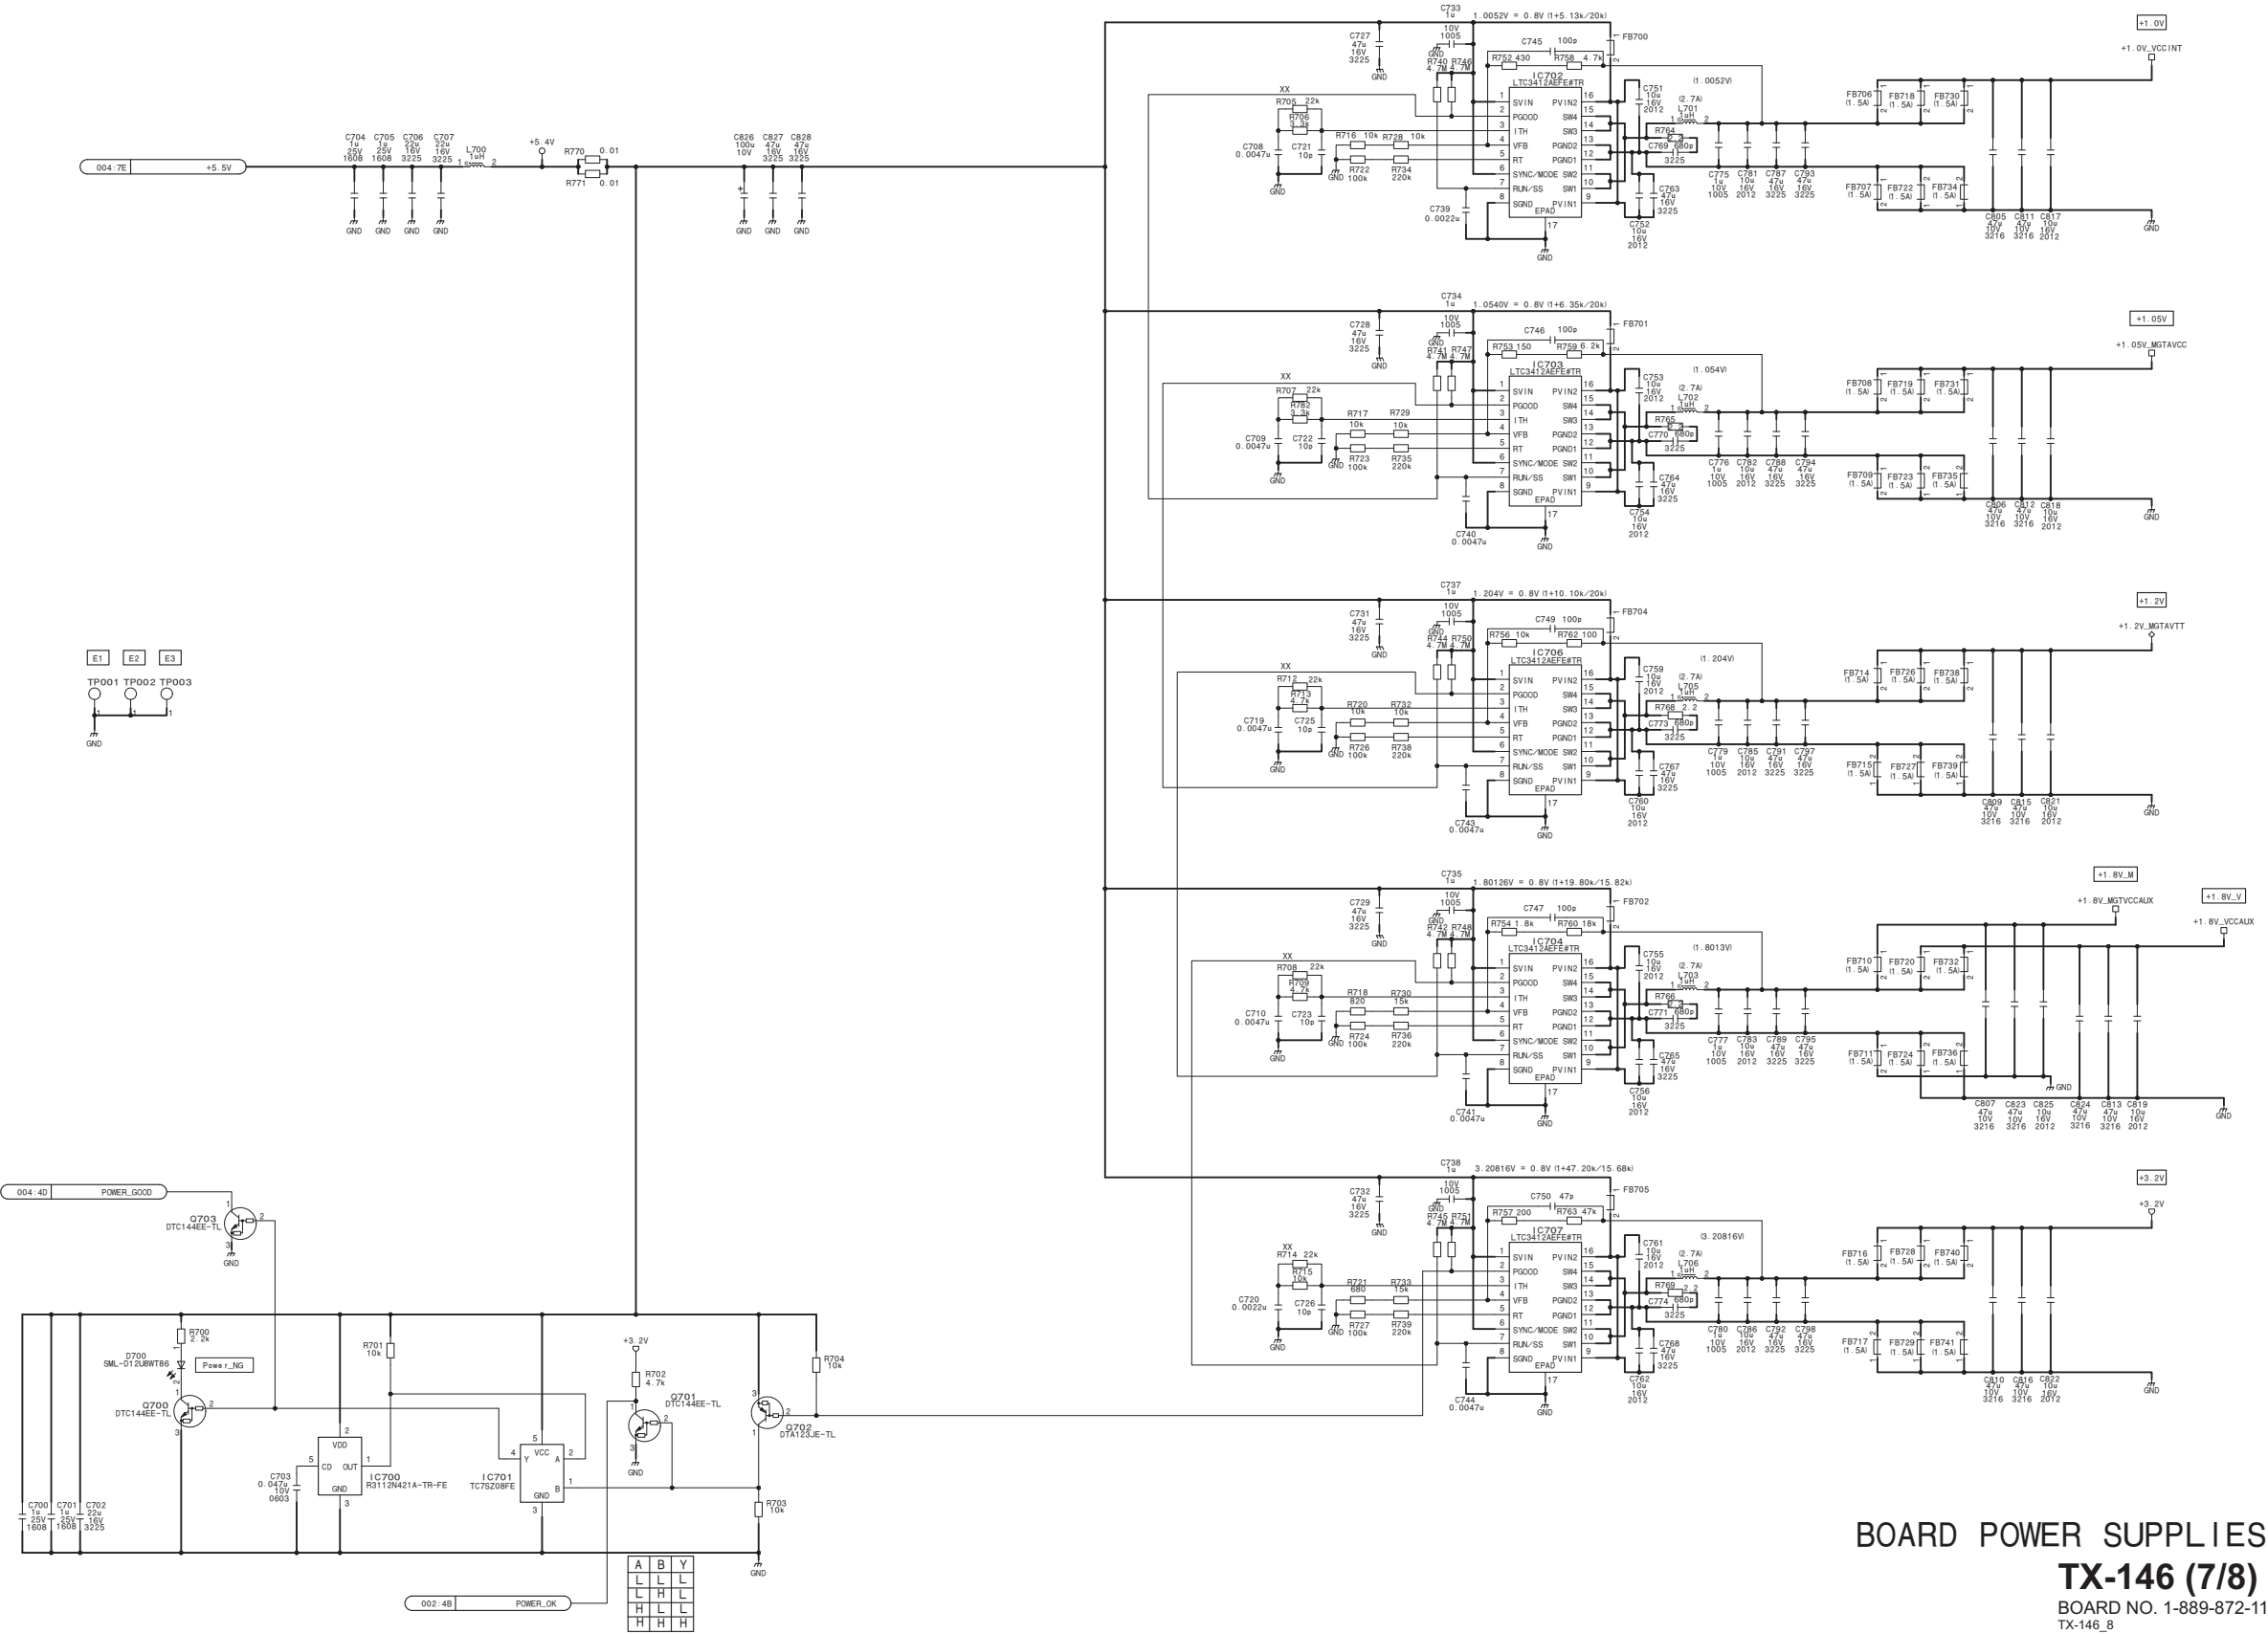

BOARD POWER SUPPLIES
TX-146 (7/8)
BOARD NO. 1-889-872-11
TX-146_8

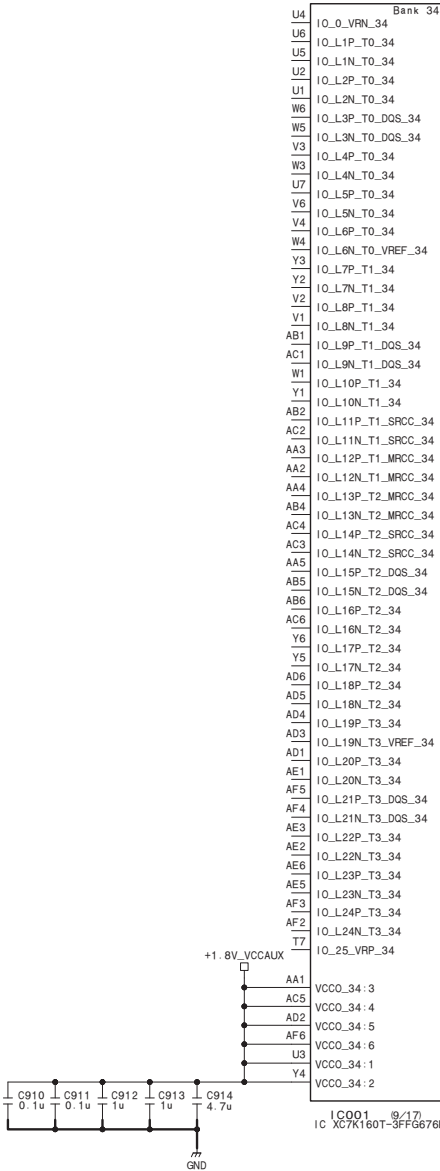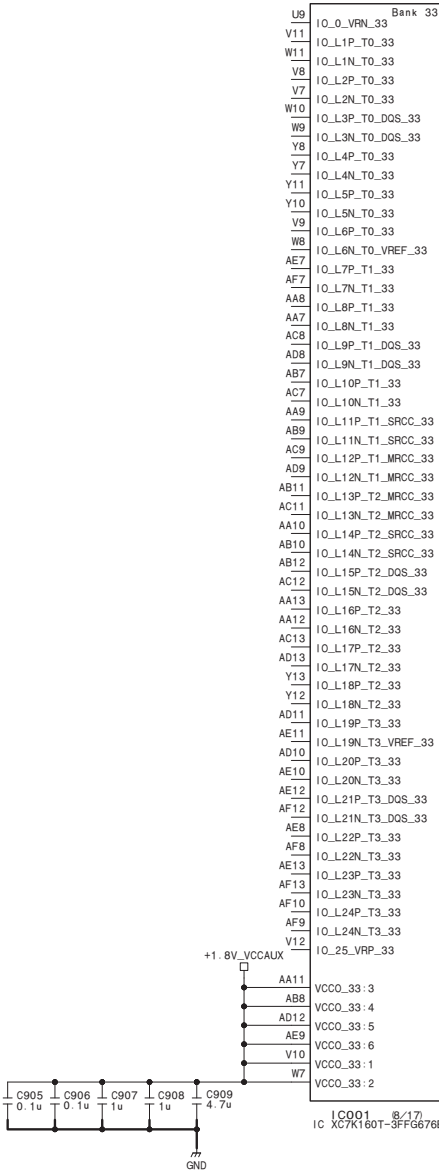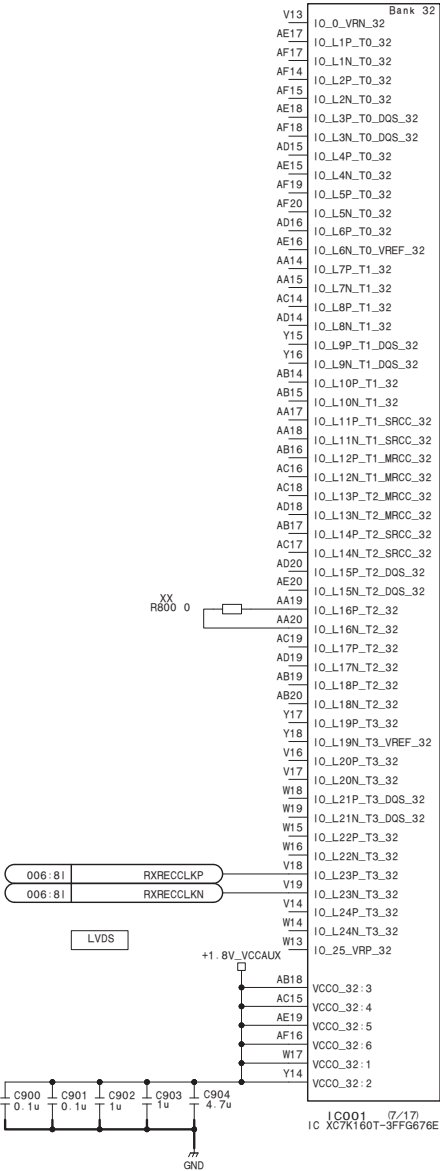


Kintex7-Bank32 (1.8v, RXRECCLK) ,
unused Banks (Bank33 (1.8v) , 34 (1.8v))


Section 3
Board Layouts

AT-189

The location is described at the end in this section.

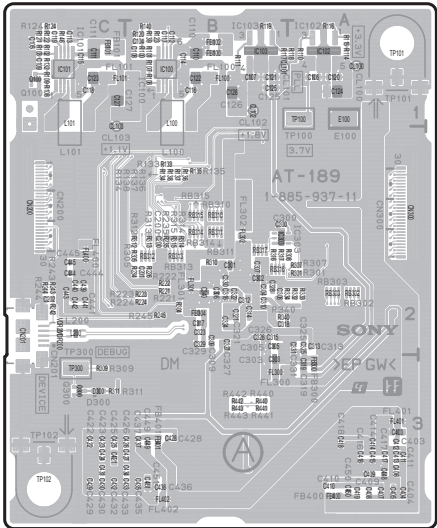


AT-189 -A SIDE-
SUFFIX: -11

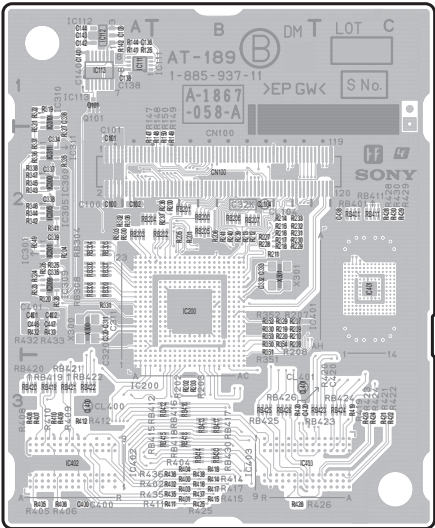


AT-189 -B SIDE-
SUFFIX: -11

CN-3601

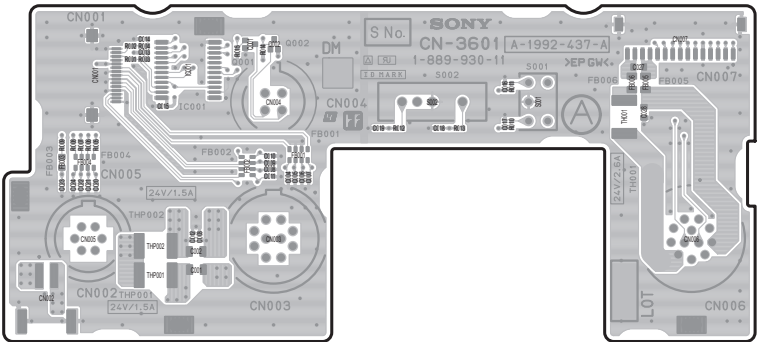


CN-3601 -A SIDE-
SUFFIX: -11

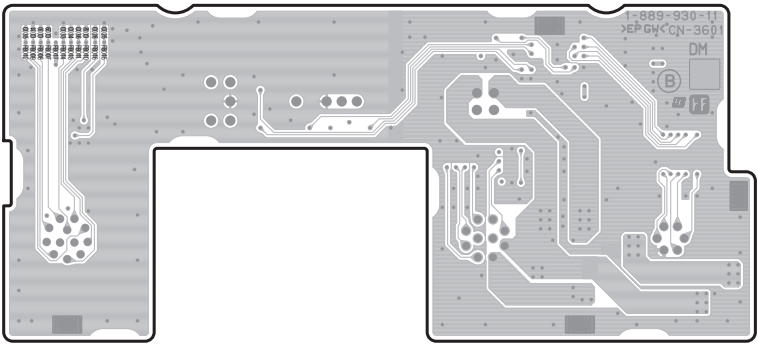


CN-3601 -B SIDE-
SUFFIX: -11

CN-3602




CN-3602 -A SIDE-
SUFFIX: -11



CN-3602 -B SIDE-
SUFFIX: -11

CN-3603




CN-3603 -A SIDE-
SUFFIX: -11




CN-3603 -B SIDE-
SUFFIX: -11

CN-3605




CN-3605 -A SIDE-
SUFFIX: -11




CN-3605 -B SIDE-
SUFFIX: -11

CN-3606




CN-3606 -A SIDE-
SUFFIX: -11




CN-3606 -B SIDE-
SUFFIX: -11

CN-3607




CN-3607 -A SIDE-
SUFFIX: -11




CN-3607 -B SIDE-
SUFFIX: -11

CN-3616




CN-3616 -A SIDE-
SUFFIX: -11




CN-3616 -B SIDE-
SUFFIX: -11

CN-3617




CN-3617 -A SIDE-
SUFFIX: -11




CN-3617 -B SIDE-
SUFFIX: -11

CN-3624




CN-3624 -A SIDE-
SUFFIX: -11




CN-3624 -B SIDE-
SUFFIX: -11

DPR-351

The location is described at the end in this section.

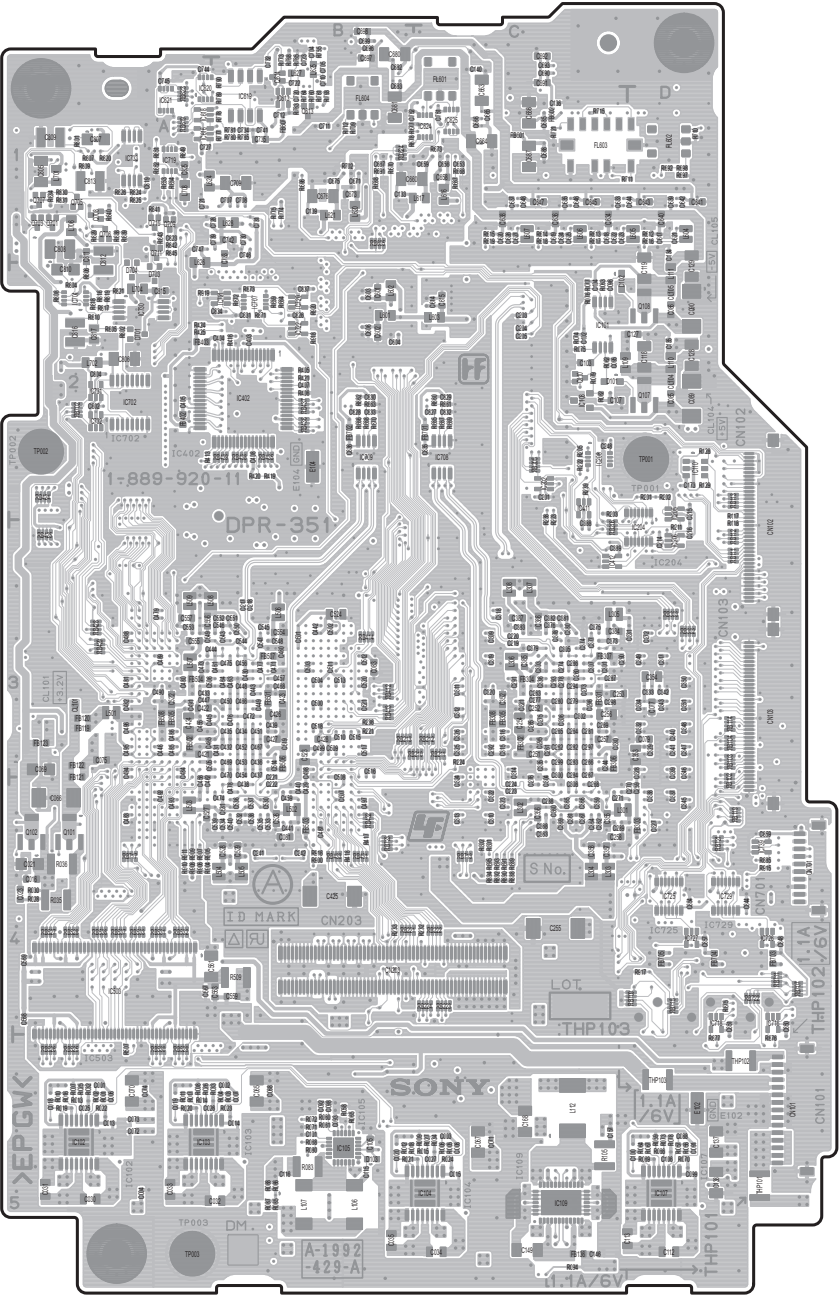


DPR-351 -A SIDE-
SUFFIX: -11

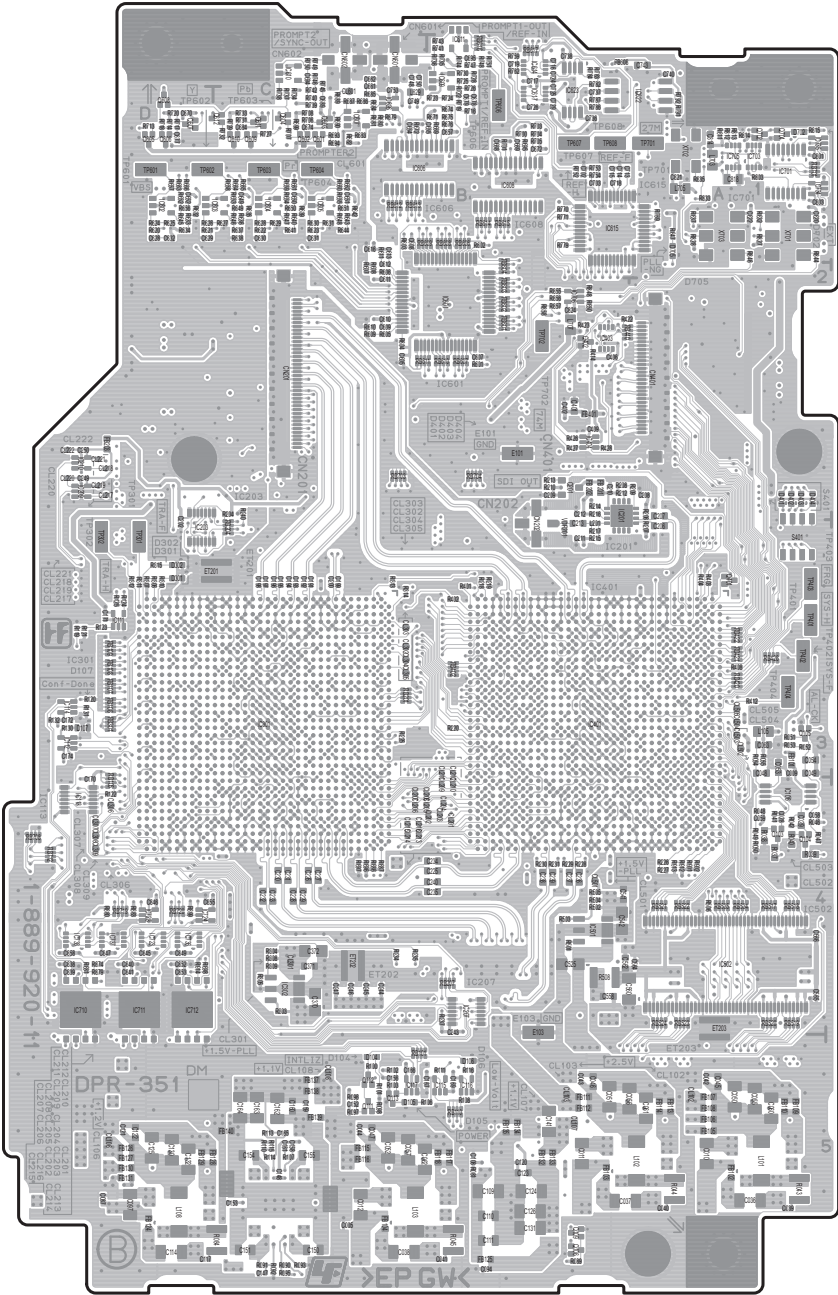


DPR-351 -B SIDE-
SUFFIX: -11

IF-1231

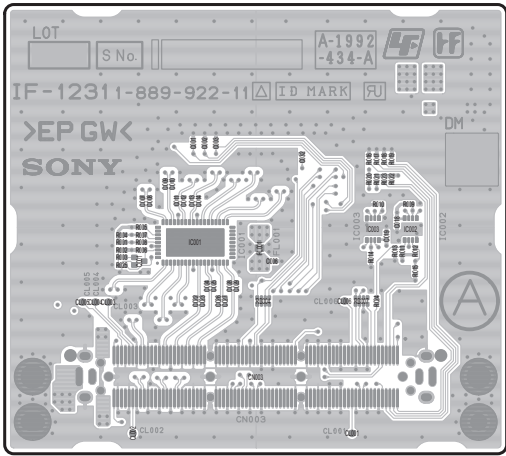


IF-1231 -A SIDE-
SUFFIX: -11

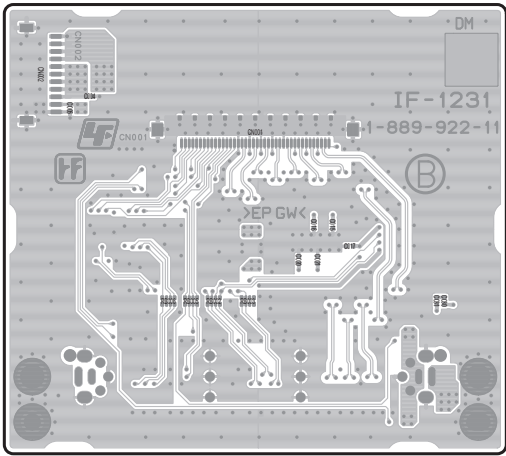


IF-1231 -B SIDE-
SUFFIX: -11

IF-1262

The location is described at the end in this section.

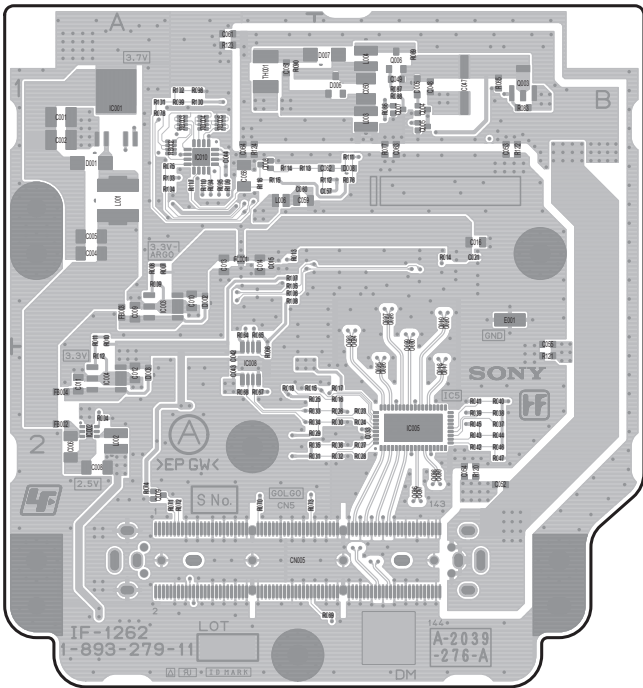


IF-1262 -A SIDE-
SUFFIX: -11

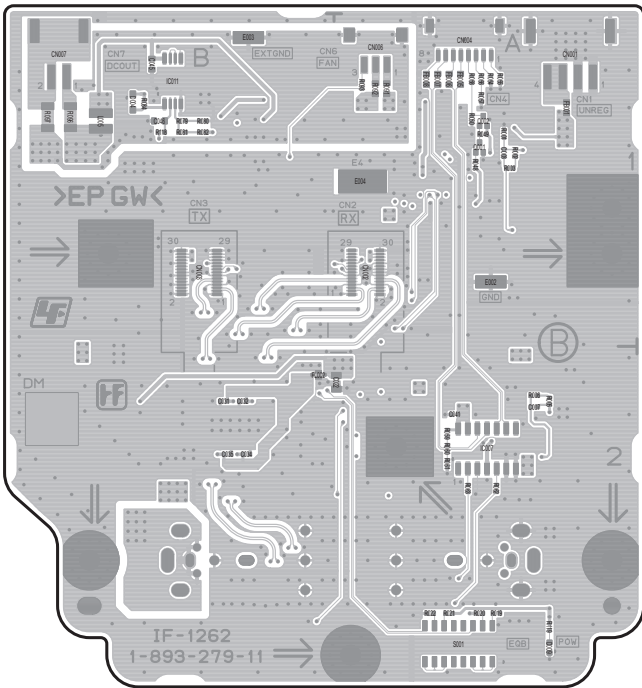


IF-1262 -B SIDE-
SUFFIX: -11

LE-391




LE-391 -A SIDE-
SUFFIX: -11




LE-391 -B SIDE-
SUFFIX: -11

SW-1592/1592A

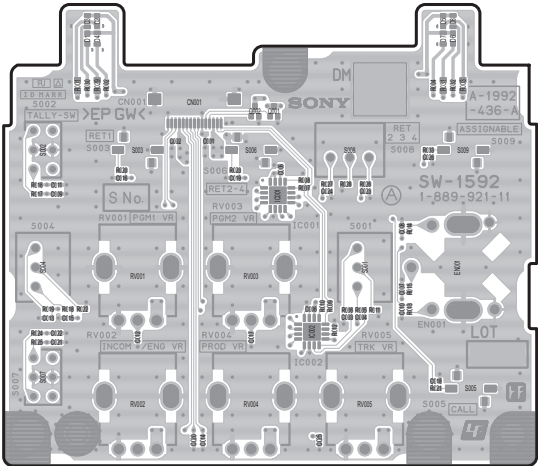


SW-1592/1592A -A SIDE-
SUFFIX: -11

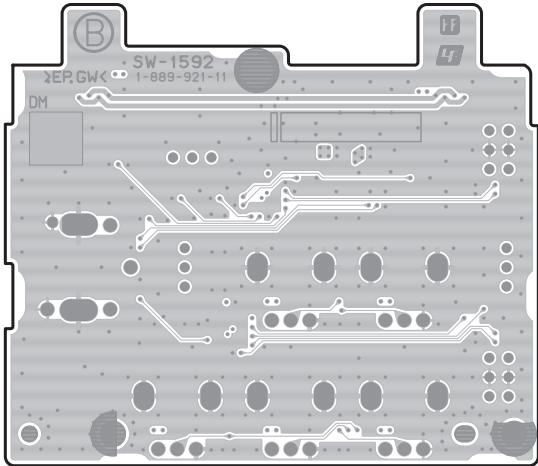


SW-1592/1592A -B SIDE-
SUFFIX: -11

SW-1594




SW-1594 -A SIDE-
SUFFIX: -11




SW-1594 -B SIDE-
SUFFIX: -11

SW-1595




SW-1595 -A SIDE-
SUFFIX: -11




SW-1595 -B SIDE-
SUFFIX: -11

SY-427

The location is described at the end in this section.

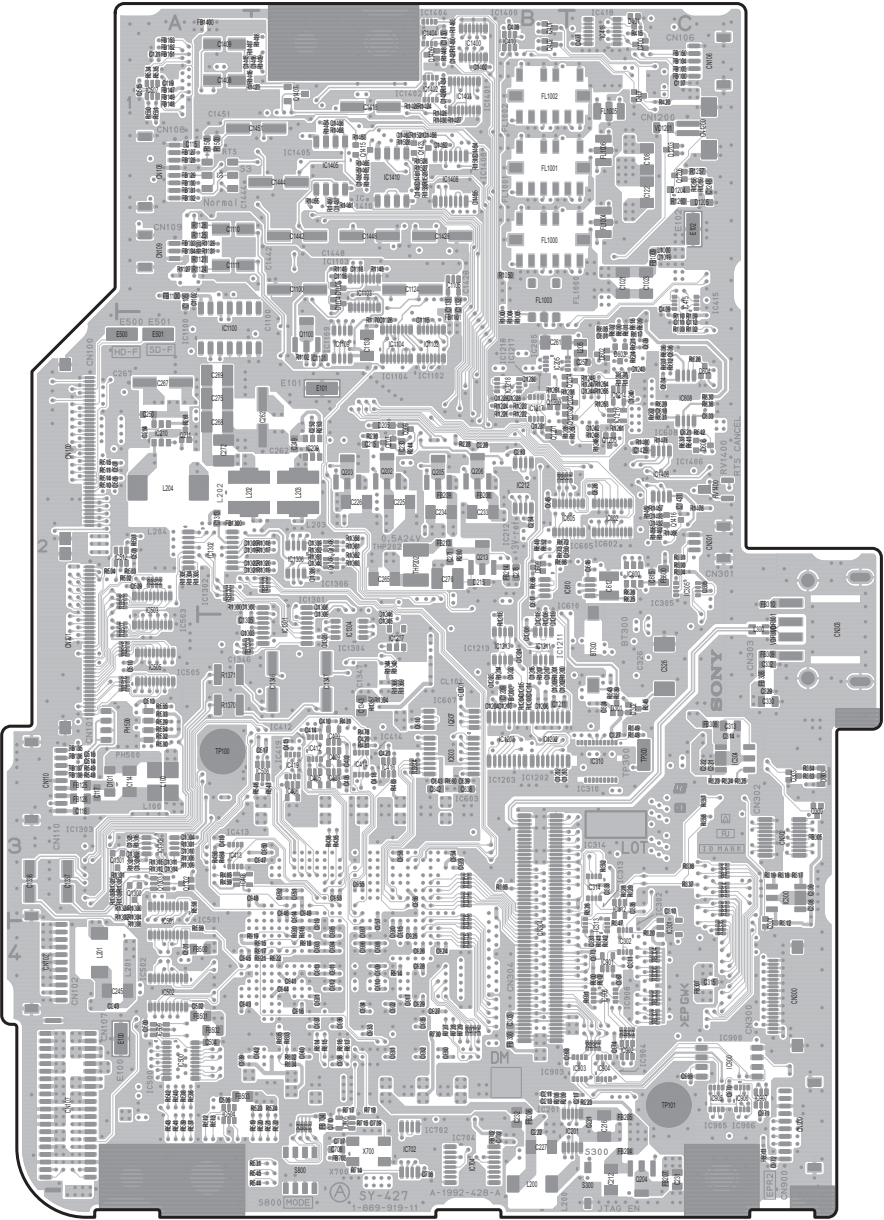


SY-427 -A SIDE-
SUFFIX: -11

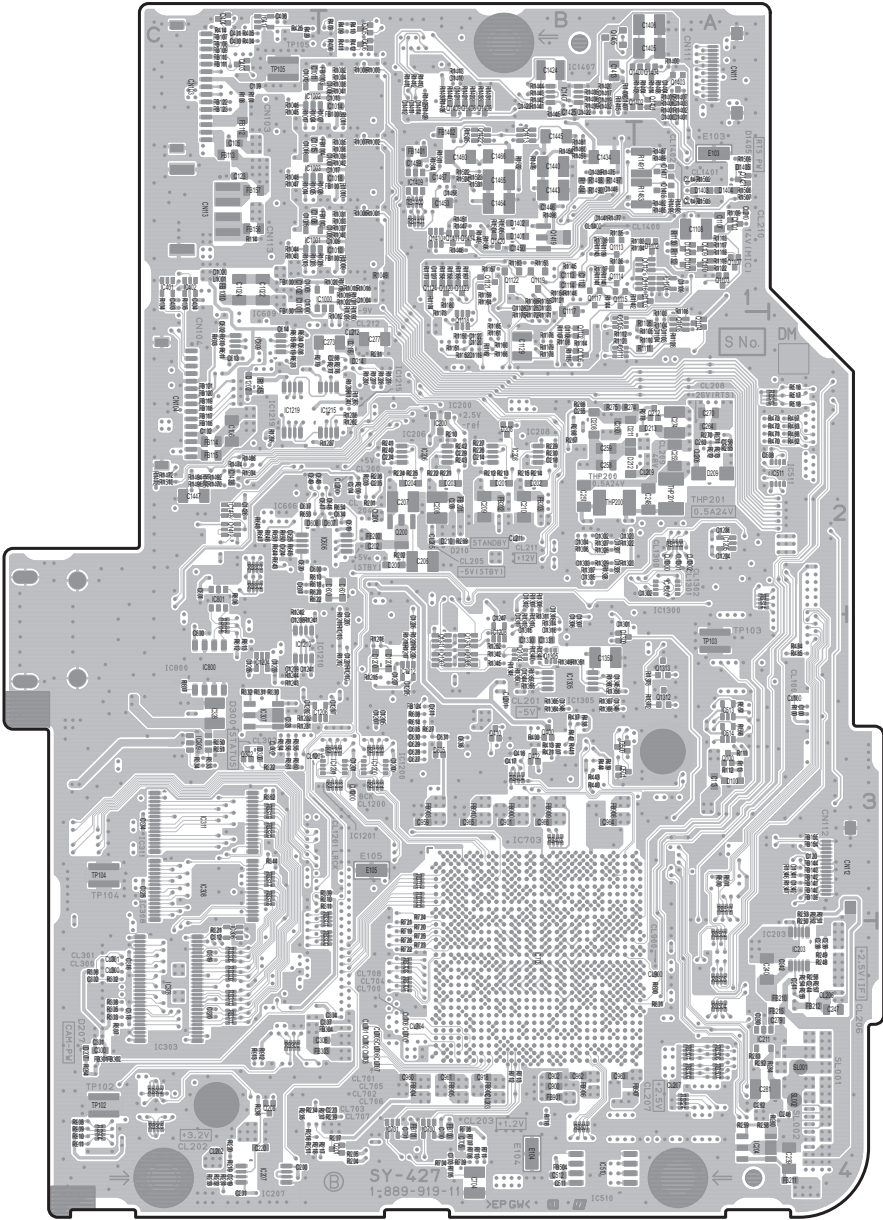


SY-427 -B SIDE-
SUFFIX: -11

TX-146

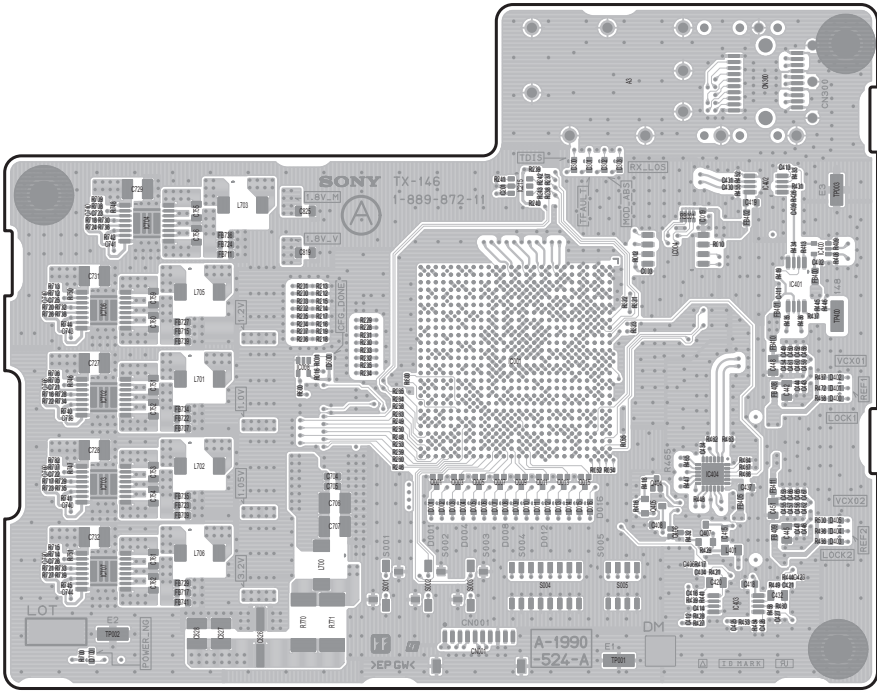

TX-146 -A SIDE-
SUFFIX: -11

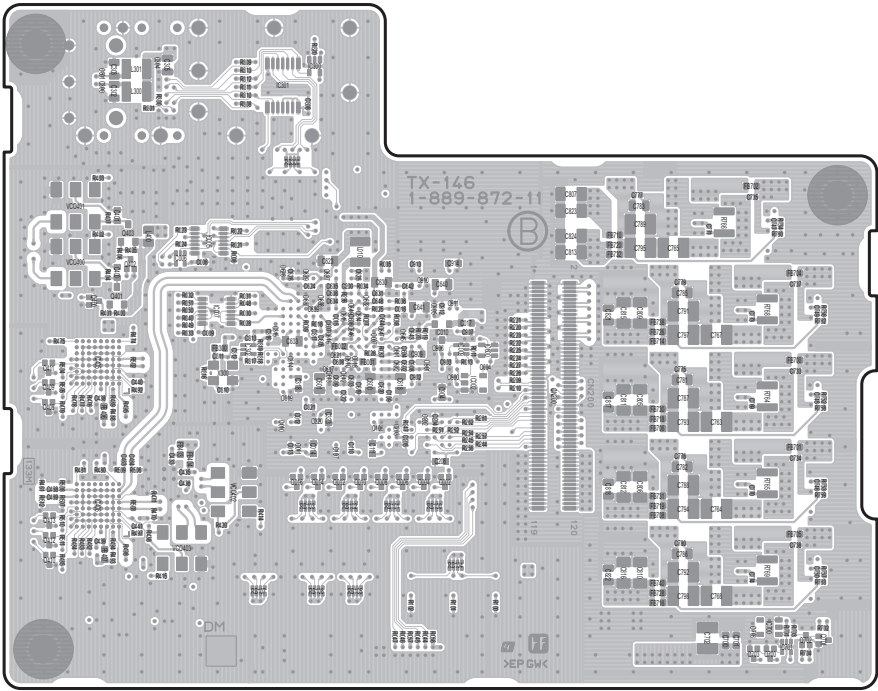

TX-146 -B SIDE-
SUFFIX: -11

Board Parts Location

AT-189 1-885-937-11 *: B SIDE	C339	* A2	FL100	B1	R205	* B2	R343	* A2	RB415	* B3	DPR-351 1-889-920-11 *: B SIDE	C196	* C3	C276	C4	C356	C4	C458	A4	C538	B4	C649	* C1	C732	B1	C002	B5	C091	D5	D701	A2
	C340	B2	FL101	C1	R206	* B2	R344	* A2	RB416	* B3		C197	* C3	C277	C3	C357	C4	C459	B4	C539	B4	C650	* C1	C733	B1	C003	C5	C092	B5	D702	* A1
	C400	* A3	FL300	B3	R207	* B2	R345	* A2	RB417	* B3		C198	* C3	C278	C3	C358	C4	C460	B3	C540	B4	C651	* C1	C734	B1	C004	A5	C093	B5	D703	A2
	C401	* A2	FL301	B2	R208	* B2	R346	* A2	RB418	* B3		C199	* C3	C279	C3	C359	C4	C461	B3	C541	* B4	C652	* D1	C735	B1	C005	* C5	C094	* B5	D704	A2
C100	* A2	C402	* A2	FL302	B2	R209	* B2	R347	* A2	RB419	* A3	C100	D5	C200	* C3	C360	C4	C462	A4	C542	* B4	C653	C1	C736	* B1	C006	A5	C095	C2	D705	* A1
C101	* A2	C403	A3	FL400	C2	R210	* B2	R349	* A2	RB420	* A3	C101	B5	C201	C2	C361	C4	C463	B3	C543	B3	C654	* C1	C737	* B1	C007	B5	C096	C2		
C102	* A2	C404	A3	FL401	A3	R211	* B2	R350	* B2	RB421	* A3	C102	C2	C202	* D3	C362	C4	C464	B3	C544	B3	C655	* B1	C738	* B1	C008	C5	C097	* D5	E101	* B2
C103	* A1	C405	A3	FL402	B3	R212	* B2	R351	* B2	RB422	* A3	C103	C2	C203	C2	C363	C4	C465	A3	C545	B3	C656	C1	C739	B1	C009	* A3	C098	B5	E102	D5
C104	B1	C406	A3			R213	* B2	R352	* B2	RB423	* C3	C104	C2	C204	C2	C364	C4	C466	B3	C546	B3	C657	* B1	C740	* A1	C010	* A5	C099	D5	E103	* B4
C105	C1	C407	A3	IC100	B1	R214	* B2	R353	* B2	RB424	* C3	C105	B5	C205	C2	C365	C4	C467	B3	C547	B3	C658	C1	C741	B1	C011	* B5			E104	B2
C106	A1	C408	A3	IC101	C1	R215	* B2	R354	* B2	RB425	* B3	C106	D5	C206	* A3	C366	C4	C468	B3	C548	B3	C659	C1	C742	B1	C012	* C5	CL101	A3		
C107	B1	C409	A3	IC102	A1	R216	* B2	R400	* B3	RB426	* B3	C107	C2	C207	* A2	C367	C4	C469	B3	C549	A3	C660	B1	C743	* A1	C013	A5	CL102	* A5	ET201	* D3
C108	B1	C410	A3	IC103	B1	R217	* B2	R401	* B3	RB430	* B3	C108	* B5	C208	* A2	C368	C4	C470	B3	C550	B3	C661	* C1	C744	A1	C014	B5	CL103	* B5	ET202	* C4
C109	C1	C411	A3	IC111	* A1	R218	* B2	R402	* B3			C109	* B5	C209	* B2	C369	C4	C471	B3	C551	B3	C662	* C1	C745	A1	C015	C5	CL104	D2	ET203	* A4
C110	B1	C412	A3	IC112	* A1	R219	* B2	R403	* B3	TP100	A1	C110	* B5	C210	* B2	C370	* C4	C472	B3	C552	B3	C663	C1	C746	B1	C016	A4	CL105	D2		
C111	C1	C413	A3	IC113	* A1	R220	* B2	R404	* B3	TP101	A1	C111	* B5	C211	* B3	C371	* C4	C473	A3	C553	A3	C664	C1	C747	A1	C018	A5	CL106	* D5	FB101	* A3
C112	B1	C414	A3	IC200	* B2	R221	B2	R405	* A3	TP102	C3	C112	D5	C212	* B2	C372	* C4	C474	B4	C554	B3	C665	C1	C748	* C1	C019	A5	CL107	* B5	FB102	* A5
C113	C1	C415	A3	IC300	* A2	R222	B2	R406	* A3			C113	C5	C213	* B3	C373	C3	C475	B3	C555	A3	C666	C1	C749	* C1	C020	B5	CL108	* C5	FB103	* B5
C114	B1	C416	A3	IC301	* A2	R223	B2	R407	* A3			C114	* D5	C214	D3	C374	C3	C476	B3	C556	A3	C667	B1	C750	* C1	C021	A4	CL201	* B4	FB104	* C5
C115	C1	C417	A3	IC303	B2	R224	B2	R408	* A3			C115	B5	C215	D2	C375	C3	C477	B3	C557	A3	C668	* B1	C751	C1	C023	A4	CL202	* B4	FB105	* A5
C116	B1	C418	A3	IC305	* A2	R226	B2	R409	* A3	VDR200	C2	C116	B5	C216	D3	C376	C3	C478	B4	C558	* B4	C669	* B1	C752	B1	C025	A5	CL203	* B4	FB106	* A5
C117	B1	C419	A3	IC309	* A2	R227	* B2	R410	* A3	VDR201	C2	C117	* D5	C217	B3	C377	C3	C479	A3	C559	B4	C670	* D1	C753	* C1	C026	A5	CL204	* B4	FB107	* A5
C118	C1	C420	* B3	IC310	* A1	R228	* B2	R411	* B3	X300	* A2	C118	D2	C218	B3	C378	C3	C480	A3	C560	* A4	C671	B1	C801	* A1	C027	C5	CL205	* B4	FB108	* A5
C119	C1	C421	C3	IC311	* A2	R229	* B2	R412	* A3	X301	* B2	C119	D2	C219	C3	C379	C3	C481	A3	C561	A4	C672	* B1	C802	A2	C028	* A4	CL206	* C4	FB109	* A5
C120	A1	C422	C3	IC401	* C2	R230	* B2	R414	* B3			C120	* B5	C220	C3	C380	C3	C482	A3	C562	* B4	C673	B1	C803	* A1	C029	* A4	CL207	* C4	FB110	* A5
C121	B1	C423	C3	IC402	* A3	R231	* B2	R415	* B3			C121	* D5	C221	B4	C301	C3	C483	A4	C563	B4	C674	* C1	C804	A2	C030	A5	CL208	* B4	FB111	* B5
C122	B1	C424	C3	IC403	* B3	R232	* B2	R416	* B3			C122	* D5	C222	B4	C302	C3	C484	A3	C564	* A4	C675	B1	C805	A1	C031	A5	CL209	* B4	FB112	* B5
C123	C1	C425	C3			R233	* B2	R417	* B3			C123	* B5	C223	C4	C303	C3	C485	A3	C565	* A4	C676	B1	C806	A2	C032	B5	CL210	* B4	FB113	* A5
C124	A1	C426	B3	L100	B1	R234	B2	R418	* B3			C124	* B5	C224	C4	C304	C4	C486	A3	C566	* A4	C677	* D1	C807	A1	C033	A5	CL211	* B3	FB114	* A5
C125	B1	C427	B3	L101	C1	R235	B2	R419	* C3			C125	* D5	C225	* B4	C305	C3	C487	B4	C567	A4	C678	* B1	C808	A1	C034	C5	CL212	* B3	FB115	* C5
C126	B1	C428	B3	L200	C2	R236	* B2	R420	* B3			C126	* B5	C226	* C4	C306	C3	C488	A3	C568	A4	C679	* B1	C809	A1	C035	B5	CL213	* C4	FB116	* C5
C127	C1	C429	C3			R237	* B2	R421	* C3			C127	D2	C227	* C4	C307	C3	C489	A3	C569	A4	C680	B1	C810	A2	C036	* A5	CL214	* C4	FB117	* B5
C136	* A1	C430	C3	Q100	C1	R239	* B2	R422	* C3			C128	D2	C228	* C4	C308	C4	C490	A3	C601	B2	C681	B1	C811	A1	C037	* B5	CL215	* C4	FB118	* B5
C138	* A1	C431	C3	Q101	* A1	R240	* B2	R423	* C3			C129	D2	C229	* C4	C309	C3	C491	A3	C602	B2	C682	B1	C812	A1	C038	* C5	CL216	* C4	FB119	A3
C140	* A1	C432	C3	Q300	C3	R241	* B2	R424	* C3			C130	* D5	C230	* C4	C310	C4	C492	A4	C603	B2	C683	B1	C813	A1	C039	* A5	CL217	* D2	FB120	A3
C142	* A1	C433	B3			R242	C2	R425	* B3			C131	* B5	C231	* C4	C311	C3	C493	A4	C604	B2	C684	* C1	C814	* A1	C040	* A5	CL218	* D2	FB121	A4
C143	* A1	C434	B3			R243	C2	R426	* B3			C132	* D5	C232	* C4	C312	C3	C494	A3	C605	* C2	C685	C1	C815	A2	C041	* B5	CL219	* D2	FB122	A3
C144	* A1	C435	B3	R100	B1	R244	C2	R428	* C2			C133	B1	C233	* C4	C313	C4	C404	B2	C606	B2	C686	C1	C816	A2	C042	* A5	CL220	* D2	FB123	A3
C200	B2	C436	B3	R102	C1	R245	B2	R429	* C2			C134	D1	C234	* B4	C314	C3	C405	A2	C607	* B2	C687	C1	C817	A2	C043	* B5	CL221	* D2	FB124	* D5
C201	B2	C437	B3	R103	C1	R300	* A2	R430	* C2			C135	D2	C235	* B4	C315	C3	C406	* B2	C608	* C1	C688	C1	C818	* A1	C044	* C5	CL222	* D2	FB125	* B5
C202	C2	C438	* C2	R106	B1	R301	A2	R432	* A2			C136	C1	C236	* B4	C316	C3	C407	B2	C609	* C2	C689	* C1	C819	A1	C045	* A5	CL301	* C4	FB126	* D5
C300	B2	C439	C2	R107	B1	R302	* A2	R433	* A2			C137	D5	C237	* B4	C317	D3	C408	B2	C610	* C2	C690	C1	C820	* A1	C046	* B5	CL302	* C3	FB127	* D5
C301	B2	C440	C2	R108	C1	R303	* A2	R435	* B3			C138	D5	C238	* B4	C318	C3	C409	* B2	C500	B3	C611	* C2	C821	* A1	C047	* C5	CL303	* C3	FB128	* C5
C302	B2	C441	C2	R109	C1	R304	B2	R436	* B3			C139	B1	C239	* B4	C319	C3	C421	A3	C501	B3	C612	* C2	C822	* A1	C048	* A3	CL304	* C3	FB129	* D5
C303	B3	C442	C2	R110	A1	R305	B2	R437	* B3			C140	C1	C240	* B4	C320	C3	C422	A3	C502	B3	C613	* C1	C823	A1	C049	* A3	CL305	* C3	FB130	* D5
C304	B2	C443	C2	R111	B1	R306	* A2	R438	* B3			C141	* B5	C241	B4	C321	C3	C423	B3	C503	B3	C614	C2	C824	* B2	C050	* A5	CL306	* D4	FB131	* D5
C305	B2	C444	C2	R114	A1	R307	A2	R440	B3			C146	C5	C242	B4	C322	C4	C424	A3	C504	B3	C615	C2	C825	A1	C051	* B5	CL307	* D4	FB132	* B5
C306	B2	C445	C2	R115	A1	R308	A2	R441	B3			C147	* C5	C243	* B4	C323	C4	C425	B4	C505	A3	C616	* C1	C826	B2	C052	* C5	CL308	* D4	FB133	* B5
C307	B2	C446	* A2	R116	A1	R309	C3	R442	B3			C148	* C5	C244	* C4	C324	C4	C426	B3	C506	A3	C617	D1	C827	C2	C053	* A3	CL309	* D4	FB134	* B5
C308	B2	C447	* A2	R117	B1	R310	B2	R443	B3			C149	C5	C245	* C4	C325	C3	C427	B3	C507	B4	C618	C1	C828	B2	C054	* A3	CL501	* B4	FB135	* B5
C309	B2	C448	A3	R118	A1	R311	C3					C150	* C5	C246	* C4	C326	C3	C428	B3	C508	B4	C619	C1	C829	C2	C055	* A5	CL502	* A3	FB136	C5
C310	B2	C449	B3	R119	B1	R312	B2	RB200	* B2			C151	* C5	C247	* C4	C327	D4	C429	B4	C509	B3	C620	C1	C830	B2	C056	* A5	CL503	* A3	FB137	* C5
C311	* A2	C450	A3	R120	B1	R313	B2	RB201	* B2			C152	* C5	C248	C2	C328	D3	C430	B3	C510	B										

Continued

C504	A4	C913	B4	C1021	C1	C1245	B3	C1428	B1	CN107	A4	FB107	*C1	FB701	*B4	IC417	*C1	IC1403	*C2	Q1300	A3	R231	*C4	R341	C4	R520	B4	R660	B3	R1019	*B1	R1154	*B1
C505	A2	C914	B3	C1022	*C1	C1246	B3	C1429	C2	CN108	A1	FB108	*C1	FB702	B4	IC418	C1	IC1404	B1	Q1301	A3	R232	*C4	R342	C4	R521	B4	R666	B2	R1020	*B1	R1155	*B1
C506	A4	C915	B4	C1023	C1	C1247	*B3	C1430	B1	CN109	A1	FB109	*C1	FB703	B4	IC419	B3	IC1405	B1	Q1302	A3	R233	*C4	R343	C3	R522	B4	R668	B2	R1021	*B1	R1156	*B1
C507	A2	C916	B4	C1024	*C1	C1248	C1	C1431	C2	CN110	A3	FB110	*C1	FB704	B4	IC500	A4	IC1406	C2	Q1303	A3	R234	*C4	R344	*C3	R523	B4	R672	B2	R1022	*B1	R1157	*B1
C508	*A2	C917	B4	C1025	*C1	C1300	A2	C1432	C2	CN111	*A1	FB111	*C1	FB900	*B3	IC501	A4	IC1407	*B1	Q1304	*B3	R235	*C4	R345	C3	R524	B4	R673	B2	R1023	*C1	R1158	*B1
C509	A2	C918	*B4	C1100	B1	C1301	*B3	C1433	C2	CN112	*A3	FB112	*C1	FB901	*B4	IC502	A4	IC1408	B1	Q1305	*B3	R236	B2	R347	C4	R529	A3	R704	*B4	R1024	*C1	R1159	*B1
C510	A3	C919	B4	C1101	B2	C1302	*A2	C1434	*B1	CN113	*C1	FB113	*C1	FB902	*B4	IC503	A2	IC1409	*B1	Q1306	*B3	R237	*B4	R348	C3	R530	A3	R705	*B4	R1025	*C1	R1160	*B2
C511	*B4	C920	B4	C1102	A1	C1303	A3	C1435	B1	CN300	C4	FB114	*C2	FB903	*B3	IC504	A4	IC1410	B1	Q1307	*B3	R238	*C4	R349	C3	R531	B4	R706	*B4	R1026	*B1	R1161	*B2
C512	*B4	C921	B4	C1103	*A2	C1304	A3	C1436	B1	CN301	C2	FB115	*C2	FB904	*B4	IC505	A3			Q1308	B2	R239	*B4	R350	*C3	R532	A3	R707	*B4	R1027	*B1	R1162	*B2
C513	A3	C922	B4	C1104	*A2	C1305	A3	C1437	B1	CN302	C3	FB116	*C2	FB905	*B4	IC506	B3	L100	A3	Q1309	B2	R240	*B2	R351	*C3	R533	A3	R708	*B4	R1028	*B1	R1163	*B1
C514	A3	C923	B3	C1105	A1	C1306	*B3	C1438	*C2	CN303	C3	FB117	*C2	FB906	*B4	IC507	A1	L200	B4	Q1310	*B3	R241	*B2	R352	C3	R534	A1	R709	*B4	R1029	*B2	R1164	*B1
C515	A1	C924	B4	C1106	*B2	C1307	*B3	C1439	*B1	CN304	B4	FB118	*C2	FB907	*A4	IC509	A4	L201	A4	Q1311	*B3	R242	*B2	R354	*C3	R535	A1	R710	*B4	R1030	*B2	R1165	*B2
C516	A3	C925	B4	C1107	*A1	C1308	B2	C1440	*B1	CN900	C4	FB119	*C2	FB908	*B3	IC510	*B4	L202	A2	Q1312	*A3	R243	*B2	R355	*C3	R536	A4	R711	*B4	R1031	*B1	R1166	*B2
C517	B3	C926	B4	C1108	*A1	C1309	B3	C1441	*B1	CN1200	C1	FB120	*C2	FB909	*B3	IC511	*A2	L203	B2	Q1313	*A3	R244	B2	R356	*C3	R537	A4	R712	*B4	R1032	*B1	R1167	*B1
C600	*C2	C927	B4	C1109	*A1	C1310	A3	C1442	B1			FB121	*C2	FB910	*B3	IC512	A2	L204	A2	Q1400	*A1	R248	*A4	R357	C3	R538	A4	R713	*B4	R1033	*B1	R1168	*B1
C601	C2	C928	B4	C1110	A1	C1311	A3	C1443	*B1	D100	*A3	FB122	*C1	FB911	C4	IC513	*A3	L205	C2	Q1401	*A1	R249	*A4	R358	C3	R539	A4	R714	B4	R1034	*B1	R1169	*B1
C602	*C2	C929	B4	C1111	A1	C1312	*B2	C1444	B1	D101	A3	FB123	*C1	FB1000	*C1	IC514	*A3	L300	C3	Q1402	*A1	R250	*A4	R360	*C3	R540	A4	R715	B4	R1035	*B1	R1170	B2
C603	C2	C930	B4	C1112	*B1	C1313	A2	C1445	*B1	D200	*B2	FB124	*B3	FB1001	*C1	IC600	C2	L1000	C1	Q1403	*A1	R251	*A3	R361	*C3	R541	A4	R716	*B4	R1036	*B1	R1171	*B2
C604	C2	C931	B4	C1113	*B1	C1314	A3	C1446	*B1	D201	*B2	FB125	A3	FB1002	*B1	IC602	C2	L1001	*C1	Q1404	*A1	R252	*A3	R362	*C3	R542	A4	R717	B4	R1037	*B1	R1172	*B2
C605	*B3	C932	B4	C1114	*B1	C1315	*B3	C1447	*C2	D202	*B2	FB126	A3	FB1003	*B1	IC603	B3			Q1405	*B1	R253	*A3	R363	C3	R543	A4	R718	B4	R1038	*B1	R1173	*B2
C606	C2	C933	B4	C1115	B2	C1316	*B3	C1448	B1	D203	*B2	FB127	A1	FB1004	*B1	IC605	C2	PH500	A3	Q1406	*B1	R254	*A4	R364	C3	R544	B4	R719	*B4	R1039	*B1	R1174	*B1
C607	*C2	C934	B4	C1116	B1	C1317	*B3	C1449	*B1	D204	*B2	FB128	A1	FB1005	*B1	IC606	*B2			Q1407	B1	R255	*A4	R365	B3	R545	B4	R720	*B4	R1040	*B1	R1175	*B2
C608	*C2	C935	B4	C1117	*B2	C1318	*B2	C1450	*B1	D205	B2	FB129	A1	FB1006	*B1	IC607	B3	Q100	*A3	Q1408	*B1	R256	*A4	R400	*B3	R546	B3	R721	*B4	R1041	*B1	R1176	*B2
C609	C2	C936	B4	C1118	B1	C1319	A2	C1451	B1	D206	*B2	FB130	A1	FB1007	*B1	IC608	C2	Q200	*B2	Q1409	*B1	R257	*A4	R401	B3	R547	B3	R722	*B4	R1042	*B1	R1177	*B1
C610	B3	C937	B4	C1119	*B2	C1320	A2	C1452	B1	D207	*C4	FB131	A1	FB1009	C1	IC609	*C2	Q201	*B4	Q1410	*B1	R258	*A4	R403	*B1	R548	A3	R723	*B4	R1043	*C1	R1178	*B2
C611	*B3	C938	B4	C1120	*B2	C1321	A2	C1453	*B1	D208	*B2	FB132	A1	FB1010	*C1	IC610	C2	Q202	B2	Q1411	*B1	R259	*A4	R404	*C1	R549	A3	R724	*B3	R1044	*C1	R1179	*B2
C612	C2	C939	A4	C1121	*B1	C1322	A2	C1454	B1	D209	*A2	FB133	A1	FB1100	A1	IC700	*B4	Q203	B2	Q1412	*C2	R260	*A4	R405	*C1	R550	A1	R725	*B4	R1045	*C1	R1180	*B1
C613	*C2	C940	B4	C1122	*B2	C1323	*B2	C1455	B1	D210	*B2	FB134	A1	FB1101	B2	IC701	*B4	Q204	C4	Q1413	*B1	R261	A2	R406	*B1	R551	A1	R726	*B4	R1046	*C1	R1200	B3
C614	*C2	C941	B4	C1123	*B1	C1324	A3	C1456	B1	D211	*B2	FB135	A3	FB1200	B3	IC702	B4	Q205	B2	Q1414	*B1	R263	B2	R407	*B3	R554	A3	R727	B4	R1047	*C1	R1201	B3
C615	C2	C942	B4	C1124	B1	C1325	A3	C1458	*B1	D212	*B2	FB136	A3	FB1300	A2	IC703	*B4	Q206	B2	Q1415	B1	R264	*C4	R409	*B1	R555	A3	R728	B4	R1048	*C1	R1203	B3
C616	C2	C943	A4	C1125	*B1	C1326	A3	C1459	*B1	D213	*A2	FB137	A3	FB1400	A1	IC704	B4	Q207	B2	Q1416	C2	R265	*A2	R410	*B1	R556	*A3	R729	B4	R1049	*B1	R1204	B3
C617	B2	C944	B4	C1126	B2	C1327	*B2	C1460	*B1	D214	*B2	FB138	A3	FB1401	*B1	IC705	B4	Q208	*C4	Q1417	*A1	R266	*B2	R411	*B1	R557	*A3	R730	B4	R1050	B1	R1207	B3
C618	C2	C945	A4	C1127	*B1	C1328	*B2	C1461	B1	D215	B2	FB139	*A3	FB1402	*B1	IC800	*C3	Q209	B2	Q1418	*A1	R267	*B2	R412	*B1	R558	A3	R800	*A4	R1102	B2	R1208	B3
C619	*B2	C946	B3	C1128	*B1	C1329	B3	C1462	B1	D216	*B2	FB140	*A3			IC801	*C2	Q211	A2	Q1419	*B1	R268	*B2	R413	*B3	R559	A4	R801	*A4	R1103	*A2	R1210	*B3
C620	*C2	C947	B3	C1129	*B2	C1330	*B3	C1463	B1	D300	*C3	FB141	*A3	FL1000	B1	IC900	C4	Q212	*A2	Q1420	*B1	R269	*B2	R414	*C1	R600	C2	R802	B4	R1104	*A2	R1211	*B3
C621	C2	C948	B3	C1130	B2	C1331	*B3	C1464	*B1	D301	C3	FB142	*A3	FL1001	B1	IC901	C4	Q213	B2	Q1421	*A1	R270	*A2	R415	C1	R601	C2	R803	B4	R1105	*A2	R1212	*B3
C624	*C2	C949	B3	C1131	B1	C1332	*B2	C1465	*B1	D302	C3	FB143	*A3	FL1002	B1	IC902	C4	Q300	C3	Q1422	*B1	R271	*A2	R420	C1	R602	C2	R804	B4	R1106	*A2	R1213	*B3
C625	*C2	C950	B3	C1132	B1	C1333	*B2	C1466	*B1	D303	C3	FB144	*A3	FL1003	B1	IC903	C4	Q301	C4	Q1423	B1	R272	*A2	R421	*B3	R603	*C2	R805	B4	R1107	*B2	R1214	B3
C626	C2	C951	B3	C1200	*B3	C1334	*B2	C1467	*B1	D400	C1	FB147	A1	FL1004	C1	IC904	C4	Q302	*C3			R273	*A2	R425	*C1	R604	*C2	R806	*C2	R1108	*B2	R1215	*B3
C627	*B3	C952	B3	C1201	*B3	C1335	*B2			D401	C1	FB148	A1	FL1005	C1	IC905	C4	Q303	C3			R274	*B2	R429	*C1	R605	C2	R807	*C3	R1109	*A1	R1216	*B3
C628	*B3	C953	B3	C1202	B3	C1336	A3	CL100	*A3	D402	*B3	FB149	A1	FL1006	C1	IC906	C4	Q400	*B3	R101	*C1	R275	*B2	R435	B3	R606	C2	R812	*C3	R1110	*A2	R1217	*B3
C629	*B3	C954	B3	C1203	B3	C1337	A3	CL101	B3	D600	*B2	FB150	C1			IC907	C4	Q401	B1	R102	C2	R276	*B2	R436	B3	R607	C2	R813	*C3	R1111	*A2	R1218	B3
C630	*B3	C955	B3	C1204	B3	C1338	B2	CL200	*B2	D601	*B2	FB151	A1	IC200	*B2	IC908	C4	Q402	B1	R103	C2	R277	*B2	R437	*B3	R608	*B3	R814	B4	R1112	*B2	R1219	*B3
C631	*B3	C956	B3	C1205	*B3	C1339	B2	CL201	*B3	D602	C2	FB152	A1	IC201	C4	IC1000	*B1	Q403	*C1	R104	*C1	R278	*A2	R438	*B3	R609	C2	R815	B4	R1113	*A1	R1220	*B3
C634	*B2	C957	B4	C1206	B3	C1340	B2	CL202	*C4	D603	C2	FB153	A1	IC203	*A4	IC1001	*C1	Q404	*C1	R105	*C1	R279	*C2	R439	*B3	R610	*C2	R816	B4	R1114	*B2	R1221	*B3
C636	*B3	C958	B3	C1207	*B3	C1341	*A3	CL203	*B4	D604	C2	FB154	*A3	IC204	*A4	IC1002	*C1	Q405	*B1	R106	*C1	R280	B2	R440	*B3	R611	*C2	R817	B4	R1115	*B2	R1222	B2
C637	*C2	C959	*B3	C1208	B3	C1342	*A3	CL204	*B2	D605	*B3	FB155	*A3	IC205	B2	IC1003	*C1	Q406	*B1	R109	C2	R281	*B2	R441	*B3	R612	C2	R900	C4	R1116	*A2	R1223	B2
C638	B3	C960	*B4	C1209	B3	C1343	B3	CL205	*B2	D606																							

R1261	C2	R1407	* A1	R1491	* A1	RB706	B4
R1262	* B2	R1408	* A1	R1492	* C2	RB707	* B4
R1263	* B2	R1409	* B1	R1493	* A1	RB708	* B4
R1300	A2	R1410	* B1	R1494	* C2	RB800	B4
R1301	A3	R1411	* B1	R1495	* C2	RB801	* B4
R1303	A2	R1412	* B1	R1496	* C2	RB802	* C3
R1304	A2	R1413	* B1	R1497	* B1	RB900	* C4
R1305	A2	R1414	* A1	R1498	* B1	RB901	C4
R1306	A3	R1415	* B1	R1499	* A1	RB902	* C4
R1307	* B2	R1416	A1	R1500	A1	RB903	C4
R1308	* B2	R1417	A1	R1501	A1	RB904	* C4
R1309	A3	R1418	B1	R1502	* A1	RB905	* C4
R1310	* B3	R1419	B1	R1503	* A1	RB1200	* B3
R1311	* B3	R1420	* B1	R1504	* B1	RB1201	* B3
R1312	A3	R1421	* B1	R1505	* B1	RB1202	* B3
R1313	* B3	R1422	* B1	R1506	* B1	RB1203	* B3
R1314	* B3	R1423	B1	R1507	* A1	RB1300	* A2
R1315	A3	R1424	B1	R1508	* A1	RB1301	A2
R1316	A3	R1425	* B1	R1509	* A1	RB1303	B2
R1317	B2	R1426	B1	R1510	* C2	RB1304	A3
R1318	B2	R1427	B1	R1511	* B1	RB1400	* B1
R1319	B2	R1428	B1	R1513	B1	RB1401	* B1
R1320	B2	R1429	* B1	R1514	* B1		
R1321	A3	R1430	B1	R1521	B1	RV1400	C2
R1322	* B2	R1431	* B1	R1522	* B1		
R1323	* B2	R1432	* B1	R1523	* B1	S3	A1
R1324	A3	R1433	* B1	R1524	* B1	S300	C4
R1325	A3	R1434	B1	R1525	* B1	S800	B4
R1326	* B2	R1435	* B1	R1526	B1		
R1327	* B2	R1436	* B1	R1527	B1	SL001	* A4
R1328	* B2	R1437	* B1	R1528	B1	SL002	* A4
R1329	* B2	R1438	* B1	R1529	B1		
R1330	A3	R1439	* B1	R1530	B1	THP200	* B2
R1331	A3	R1440	* B1	R1531	* B1	THP201	* A2
R1332	A3	R1441	* B1	R1532	* B1	THP202	B2
R1333	A3	R1442	* B1	R1534	* C2		
R1334	A3	R1443	* B1			TP100	A3
R1335	A3	R1444	* B1	RB300	* B4	TP101	C4
R1336	* B2	R1445	* B1	RB301	* B3	TP102	* C4
R1337	* B2	R1446	* B1	RB304	C4	TP103	* A3
R1338	A4	R1447	* B1	RB305	C4	TP104	* C3
R1339	A3	R1448	B1	RB306	C4	TP105	* C1
R1340	* B3	R1449	* B1	RB307	C4	TP300	C3
R1341	* B3	R1450	B1	RB308	* C4		
R1342	* B3	R1451	* B1	RB309	* C4	VD1201	C1
R1343	B3	R1452	C2	RB310	* C4	VDR300	C3
R1344	B3	R1453	B1	RB311	* C4	VDR301	C3
R1345	* B3	R1454	B1	RB313	C3		
R1346	* A3	R1455	B1	RB314	C3	X700	B4
R1347	* A3	R1456	C2	RB315	C3		
R1348	* B3	R1457	C2	RB316	C4		
R1349	* B3	R1458	* B1	RB317	* C3		
R1350	* B3	R1459	* B1	RB318	* C3		
R1351	* B3	R1460	* B1	RB319	* C3		
R1352	B2	R1461	B1	RB320	* C3		
R1353	B2	R1462	C2	RB403	* B3		
R1354	B3	R1463	B1	RB404	* B3		
R1355	* B3	R1465	B1	RB500	* A4		
R1356	* B3	R1466	C2	RB501	* A4		
R1357	B3	R1467	B1	RB502	* A4		
R1358	B2	R1468	B1	RB504	* A4		
R1359	* B3	R1469	B1	RB505	* A4		
R1360	* B3	R1470	* C2	RB506	* A4		
R1361	B2	R1471	B1	RB507	* A4		
R1362	B2	R1472	* C2	RB510	* A3		
R1363	B2	R1473	* C2	RB514	* A2		
R1364	* B3	R1474	* C2	RB515	A3		
R1365	* B3	R1475	* B1	RB516	A3		
R1366	* B3	R1476	C2	RB517	A3		
R1367	* B3	R1477	* B1	RB518	A2		
R1368	B3	R1478	C2	RB519	* A2		
R1369	B3	R1479	* B1	RB522	A2		
R1370	A3	R1480	C2	RB524	* A4		
R1371	A3	R1481	* B1	RB601	B2		
R1372	* A3	R1482	* A1	RB602	* C2		
R1373	* A3	R1483	* A1	RB603	* C2		
R1400	* A1	R1484	* B1	RB604	B3		
R1401	* A1	R1485	* A1	RB700	* B3		
R1402	* A1	R1486	* C2	RB701	* B3		
R1403	* A1	R1487	* A1	RB702	B3		
R1404	* A1	R1488	* B1	RB703	B3		
R1405	* A1	R1489	* A1	RB704	B4		
R1406	* A1	R1490	* B1	RB705	B4		

CA4000 (SY)
CA4000 (CED)
CA4000 (J) J, E
9-878-520-02

Sony Corporation

Printed in Japan
2014. 3 08
© 2014