SONY

CAMERA CONTROL UNIT

CCU-900
CCU-900P

DIGITAL INTERFACE UNIT
BKP-9330

MAINTENANCE MANUAL
Volume 2 1st Edition (Revised 1)
Serial No. 10001 and Higher: CCU-900 (UC)
Serial No. 30001 and Higher: CCU-900 (J)
Serial No. 40001 and Higher: CCU-900P (CE)
Serial No. 10001 and Higher: BKP-9330 (SY)

⚠警告

このマニュアルは，サービス専用です。
お客様が，このマニュアルに記載された設置や保守，点検，修理などを行うと感電や火災，人身事故につながることがあります。
危険をさけるため，サービストレーニングを受けた技術者のみご使用ください。

設置や保守，点検，修理などを行う前に，別冊のメンテナンスマニュアルVolume 1の「安全のために」と別冊のオペレーションマニュアルの「安全のために」を必ずお読みください。

⚠WARNING

This manual is intended for qualified service personnel only.
To reduce the risk of electric shock, fire or injury, do not perform any servicing other than that contained in the operating instructions unless you are qualified to do so. Refer all servicing to qualified service personnel.

⚠WARNUNG

Die Anleitung ist nur für qualifiziertes Fachpersonal bestimmt.
Alle Wartungsarbeiten dürfen nur von qualifiziertem Fachpersonal ausgeführt werden. Um die Gefahr eines elektrischen Schlages, Feuergefahr und Verletzungen zu vermeiden, sind bei Wartungsarbeiten strikt die Angaben in der Anleitung zu befolgen. Andere als die angegeben Wartungsarbeiten dürfen nur von Personen ausgeführt werden, die eine spezielle Befähigung dazu besitzen.

⚠ AVERTISSEMENT

Ce manual est destiné uniquement aux personnes compétentes en charge de l’entretien. Afin de réduire les risques de décharge électrique, d’incendie ou de blessure n’effectuer que les réparations indiquées dans le mode d’emploi à moins d’être qualifié pour en effectuer d’autres. Pour toute réparation faire appel à une personne compétente uniquement.

Table of Contents

Manual Structure

Purpose of this manual ..... 3 (E)
Related manuals ..... 3 (E)
Contents ..... 4 (E)

1. Spare Parts

1-1. Notes on Repair Parts 1-1
1-2. Exploded Views 1-2
1-3. Electrical Parts List 1-11
1-4. Frame List 1-69
1-5. Supplied Accessories List 1-70
1-6. Optional Fixtures List 1-70

2. Semiconductor Pin Assignments

3. Block Diagrams

Overall (CCU-900/900P) 3-2
DPR-69 3-4
SDI-31 3-10
IF-730 3-11
AT-122 3-12
Overall (BKP-9330) 3-16
DIF-38 3-18
VPR-57 3-19

4. Schematic Diagrams

DPR-69 4-2
SDI-31 4-25
IF-730 4-32
AT-122 4-38
MB-647 4-52
CN-1617 4-56
CN-1618 4-58
CN-1619 4-58
CN-1635 4-58
CN-1636 4-58
CN-1637 4-58
CN-1638 4-59
CN-1925 4-59
Frame Wiring 4-61
DIF-38 4-64
VPR-57 4-72

5. Board Layouts

DPR-69 5-2
SDI-31 5-6
IF-730 5-8
AT-122 5-10
MB-647 5-14
CN-1617 5-16
CN-1618 5-17
CN-1619 5-17
CN-1635 5-17
CN-1636 5-17
CN-1637 5-17
CN-1638 5-17
CN-1925 5-17
DIF-38 5-18
VPR-57 5-20

Manual Structure

Purpose of this manual

This manual is the maintenance manual volume 2 of Camera Control Unit CCU-900/900P.
This manual is intended for use by trained system and service engineers, and describes the information regarding the parts list, semiconductor pin assignments, block diagrams, schematic diagrams and board layouts.

Related manuals

Beside this Maintenance Manual Volume 2, the following manuals are available for the unit.

- **Operation Manual (supplied with CCU-900/900P)**
  This manual describes how to operate the CCU-900/900P.

- **Installation and Maintenance Manual (supplied with CCU-900/900P)**
  This manual intended for use by trained system and service engineers describes the information regarding the installation of the CCU-900/900P and the information required for initial services.
  Part number: 3-204-336-0X

- **Maintenance Manual Vol. 1 (available on request)**
  This manual intended for use by trained system and service engineers describes (the circuit overview, character display functions, the main part replacements, electrical alignment, etc.) required for parts-level service.
  For obtaining, contact your local Sony Sales Office/Service Center.
  Part number: 9-968-569-0X

- **“Semiconductor Pin Assignments” CD-ROM (available on request)**
  This “Semiconductor Pin Assignments” CD-ROM allows you to search for semiconductors used in Communication System Solutions Network Company equipment.
  Semiconductors that cannot be searched for on this CD-ROM are listed in the maintenance manual for the corresponding unit. The maintenance manual contains a complete list of all semiconductors and their ID Nos., and thus should be used together with the CD-ROM.
  Part number: 9-968-546-XX

Contents

The following is a summary of the sections of this manual.

Section 1 Spare Parts

Describes exploded views, parts list, frame list used in the unit.

Section 2 Semiconductor Pin Assignments

Contains information on semiconductors used for the unit.
It includes a complete list of the semiconductors and their ID Nos. for retrieving information on “Semiconductor Pin Assignments” CD-ROM, which is available separately.
Please refer to this section together with the “Semiconductor Pin Assignments” CD-ROM.
Information on the semiconductors not contained in the CD-ROM at the time of issue of this manual, if any, is given in this section as well.

Section 3 Block Diagrams

Describes overall block diagram and block diagrams for every circuit board.

Section 4 Schematic Diagrams

Describes schematic diagrams for every circuit board and frame wiring.

Section 5 Board Layouts

Describes board layouts for every circuit board.

Section 1
Spare Parts

1-1. Notes on Repair Parts

1. Safety Related Components Warning

WARNING

Components marked ⚠ are critical to safe operation. Therefore, specified parts should be used in the case of replacement.

2. Standardization of Parts

Some repair parts supplied by Sony differ from those used for the unit. These are because of parts commonality and improvement.
Parts list has the present standardized repair parts.

3. Stock of Parts

Parts marked with “o” at SP (Supply Code) column of the spare parts list may not be stocked. Therefore, the delivery date will be delayed.

4. Harness

Harnesses with no part number are not registered as spare parts.
In need of repair, get components shown in the list and repair using them.

5. Destination Representation

The part indicated “For J/UC/CE” in the spare parts list is used in the unit written below.

For J : The part is used in a unit for Japan.
For UC : The part is used in a unit for the U.S.A. and Canada.
For CE : The part is used in a unit for regions except the above countries.

1-1. 補修部品注意事項

1. 安全重要部品

⚠警告

⚠印のついた部品は安全性を維持するために重要な部品です。したがって，交換する時は必ず指定の部品を使ってください。

2. 部品の共通化

ソニーから供給する補修用部品は，セットに使われているものと異なることがあります。
これは部品の共通化，改良等によるものです。
部品表には現時点での共通化された補修用部品が記載されています。

3. 部品の在庫

部品表のSP (Supply code) 欄に“o”で示される部品は在庫していないことがあり，納期が長くなることがあります。

4. ハーネス

部品番号が記載されていないハーネスは，サービス部品として登録されていません。
これらは，リストに展開されているコンポーネント部品で補修してください。

5. 仕向区分の表記

部品表中，下記表示のある部品は，その仕向で使用している部品です。

For J : 日本向けモデルに使用
For UC : USAおよびカナダ向けモデルに使用
For CE : 上記以外向けモデルに使用

1-2. Exploded Views

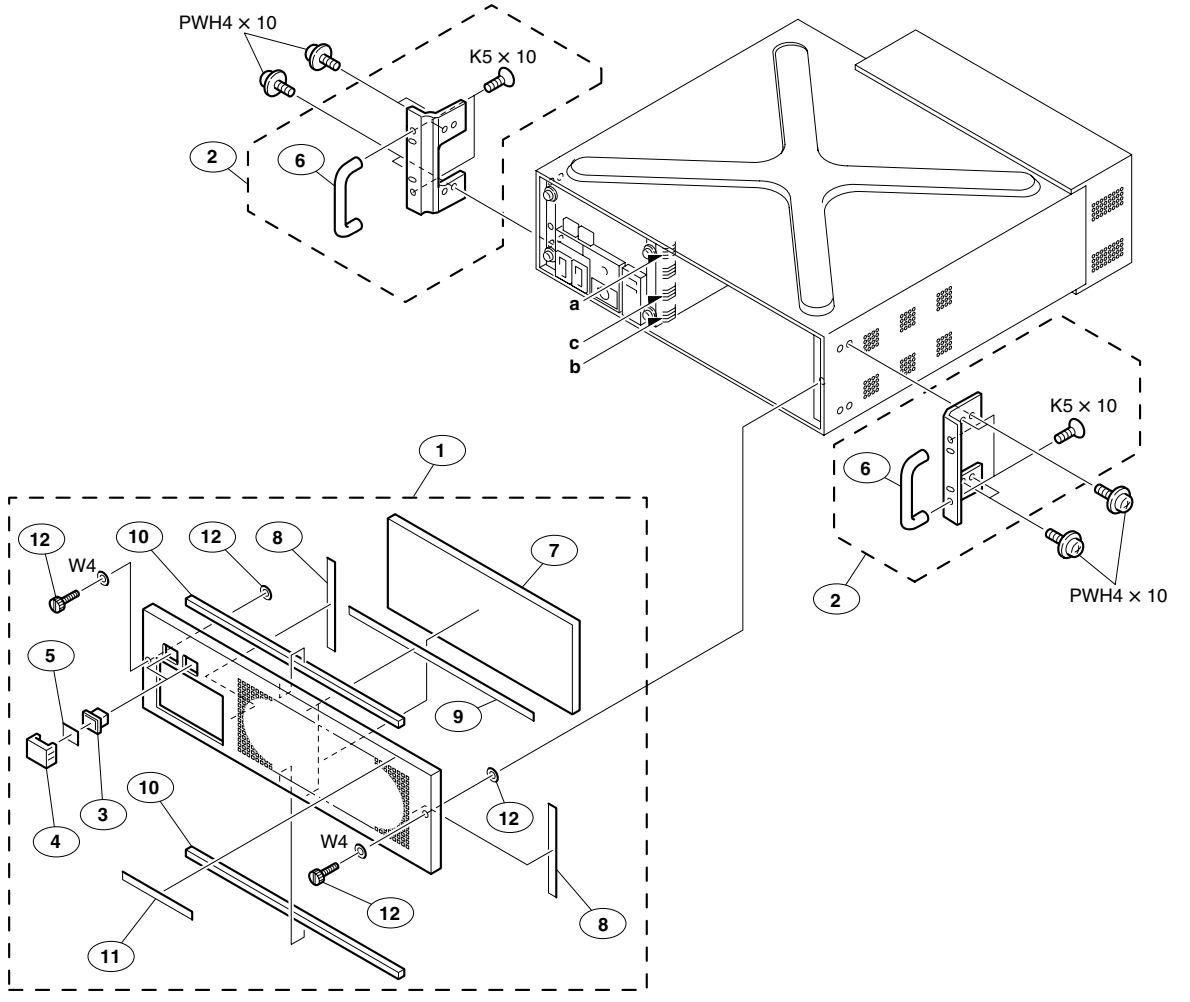

No. Part No. SP Description

1 A-8279-377-A o FRONT ASSY
2 X-2127-218-3 o ANGLE (3U) ASSY, RACK
3 2-139-192-01 s FLAME, WINDOW, INDICATOR
4 2-139-193-02 s WINDOW INDICATOR
5 2-249-353-00 s COVER, LAMP

6 2-378-801-01 s HANDLE
7 3-602-572-02 o FILTER
8 3-602-573-01 o TAPE1, ADHENSIVE
9 3-602-574-01 o TAPE2, ADHENSIVE
10 3-627-843-01 o SOFT SHIELD,PANEL

11 3-681-039-01 o NAME LABEL
12 3-687-887-01 s SCREW (M 4X20) (COPPER)

Hardware

7-623-925-01 s WASHER, PLASTIC (4X0.5)
7-682-275-09 s SCREW +K 5X10
7-682-904-21 s SCREW +PWH 4X10

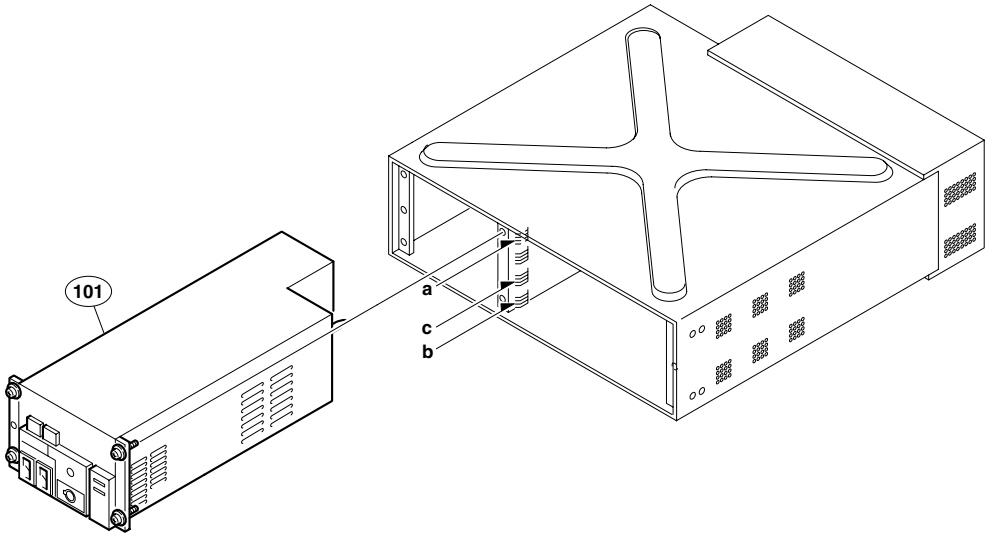

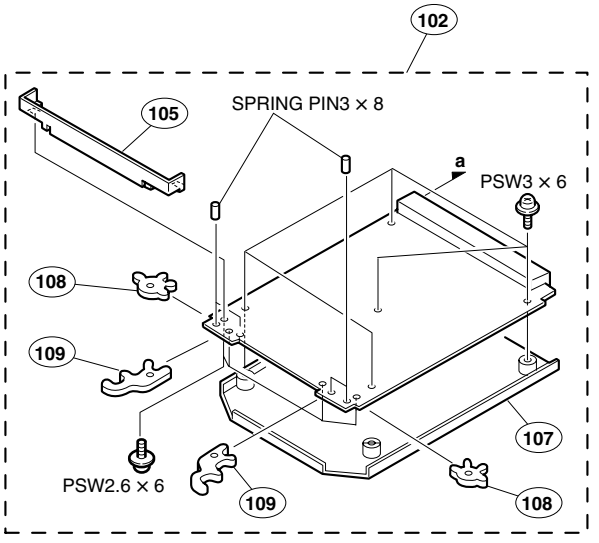

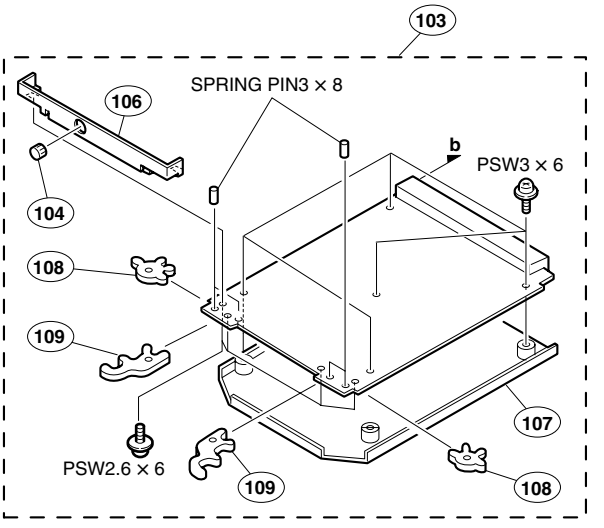

BKP-9330 (VPR-57)

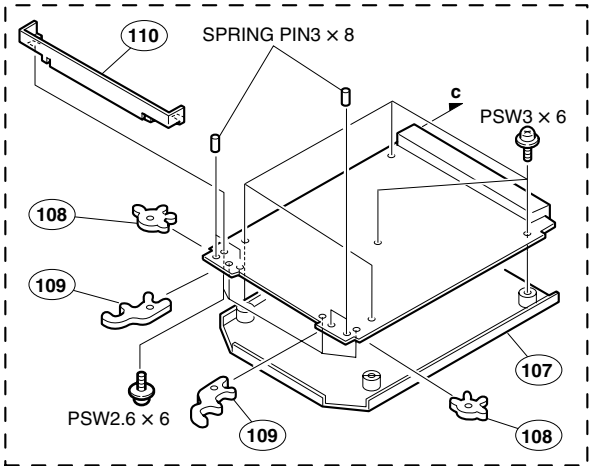

No.	Part No.	SP	Description
101 ⚠	A-8312-120-B	s	POWER UNIT (RP)
102	A-8325-788-A	o	MOUNTED CIRCUIT BOARD, DPR-69
103	A-8325-789-A	o	MOUNTED CIRCUIT BOARD, AT-122
104	3-602-483-01	s	KNOB, VOLUME 6
105	3-627-838-02	o	PC BOARD PANEL DPR-69
106	3-627-839-01	o	PC BOARD PANEL AT-122
107	3-681-020-01	o	PC SHIELD PLATE
108	3-681-042-01	o	LEVER, PC BOARD (1)
109	3-681-045-01	o	LEVER, PC BOARD (2)
110	3-628-832-01	o	PC BOARD PANEL VPR-57

Hardware

	7-621-759-40	s	SCREW +PSW 2.6X6
	7-626-320-11	s	SPRING PIN, 3X8
	7-682-947-01	s	SCREW +PSW 3X6

Rear Board

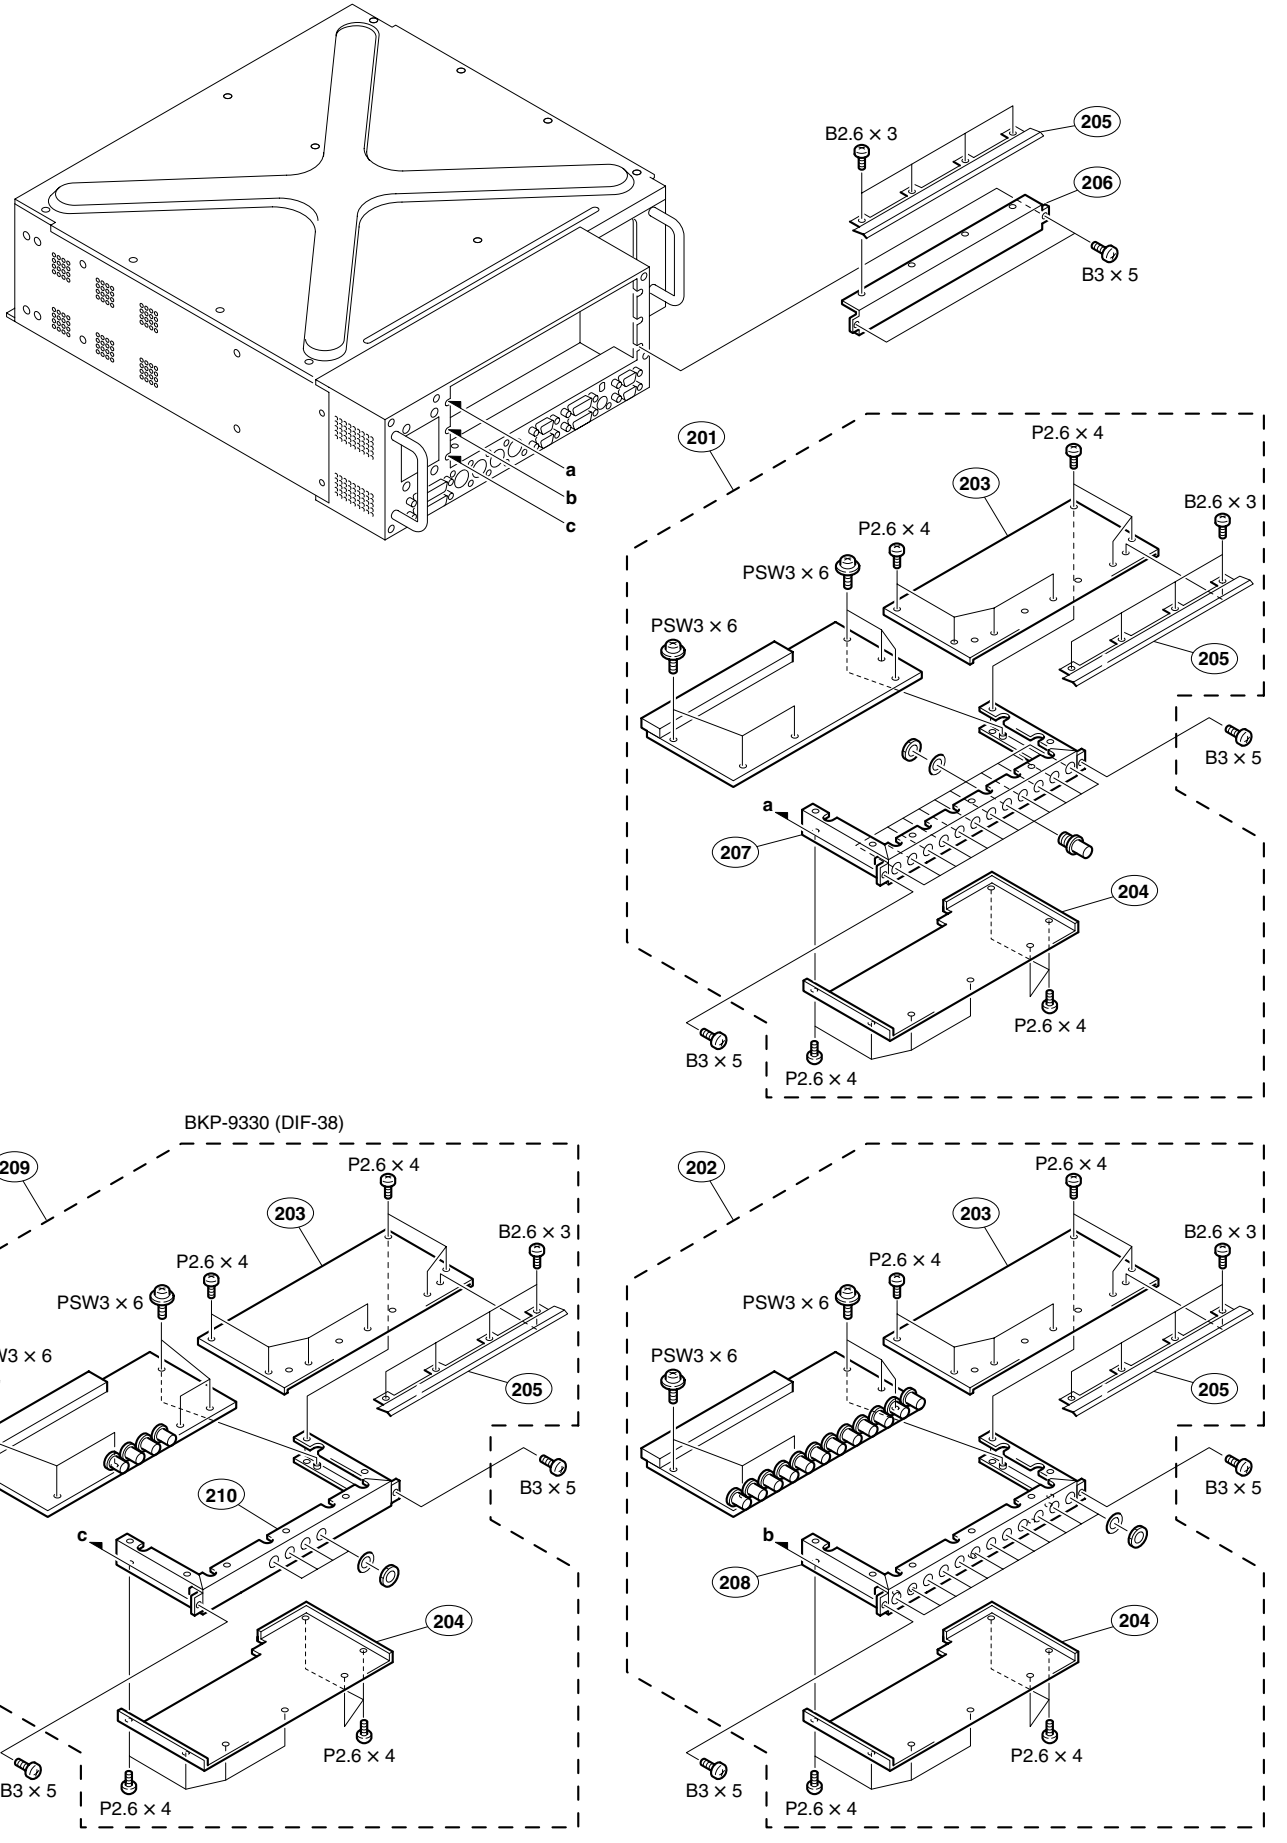
B2.6 × 3
205
206
B3 × 5
a
b
c
201
P2.6 × 4
203
B2.6 × 3
P2.6 × 4
PSW3 × 6
PSW3 × 6
205
B3 × 5
a
207
204
P2.6 × 4
B3 × 5
P2.6 × 4
BKP-9330 (DIF-38)
209
P2.6 × 4
203
B2.6 × 3
P2.6 × 4
PSW3 × 6
PSW3 × 6
205
B3 × 5
210
c
204
P2.6 × 4
B3 × 5
P2.6 × 4
202
P2.6 × 4
203
B2.6 × 3
P2.6 × 4
PSW3 × 6
PSW3 × 6
205
B3 × 5
b
208
204
P2.6 × 4
B3 × 5
P2.6 × 4

No.	Part No.	SP	Description
201	A-8325-790-A	o	MOUNTED CIRCUIT BOARD, SDI-31
202	A-8325-791-A	o	MOUNTED CIRCUIT BOARD, IF-730
203	3-627-223-02	o	REAR PC BOARD LID, UPPER
204	3-627-224-02	o	PEAR PC BOARD LID, LOWER
205	3-627-225-03	o	SPRING, SHIELD
206	3-627-227-02	o	PANEL, BLANK
207	3-627-840-01	o	PC BOARD PANEL, SDI-31
208	3-627-841-01	o	PC BOARD PANEL, IF-730
209	A-8327-226-A	o	MOUNTED CIRCUIT BOARD, DIF-38
210	3-628-831-01	o	PC BOARD PANEL, DIF-38

Hardware

	7-621-775-08	s	SCREW +B 2.6X3
	7-627-556-37	s	SCREW, PRECISION +P 2.6X4
	7-682-546-04	s	SCREW +B 3X5
	7-682-947-01	s	SCREW +PSW 3X6

Rear Panel

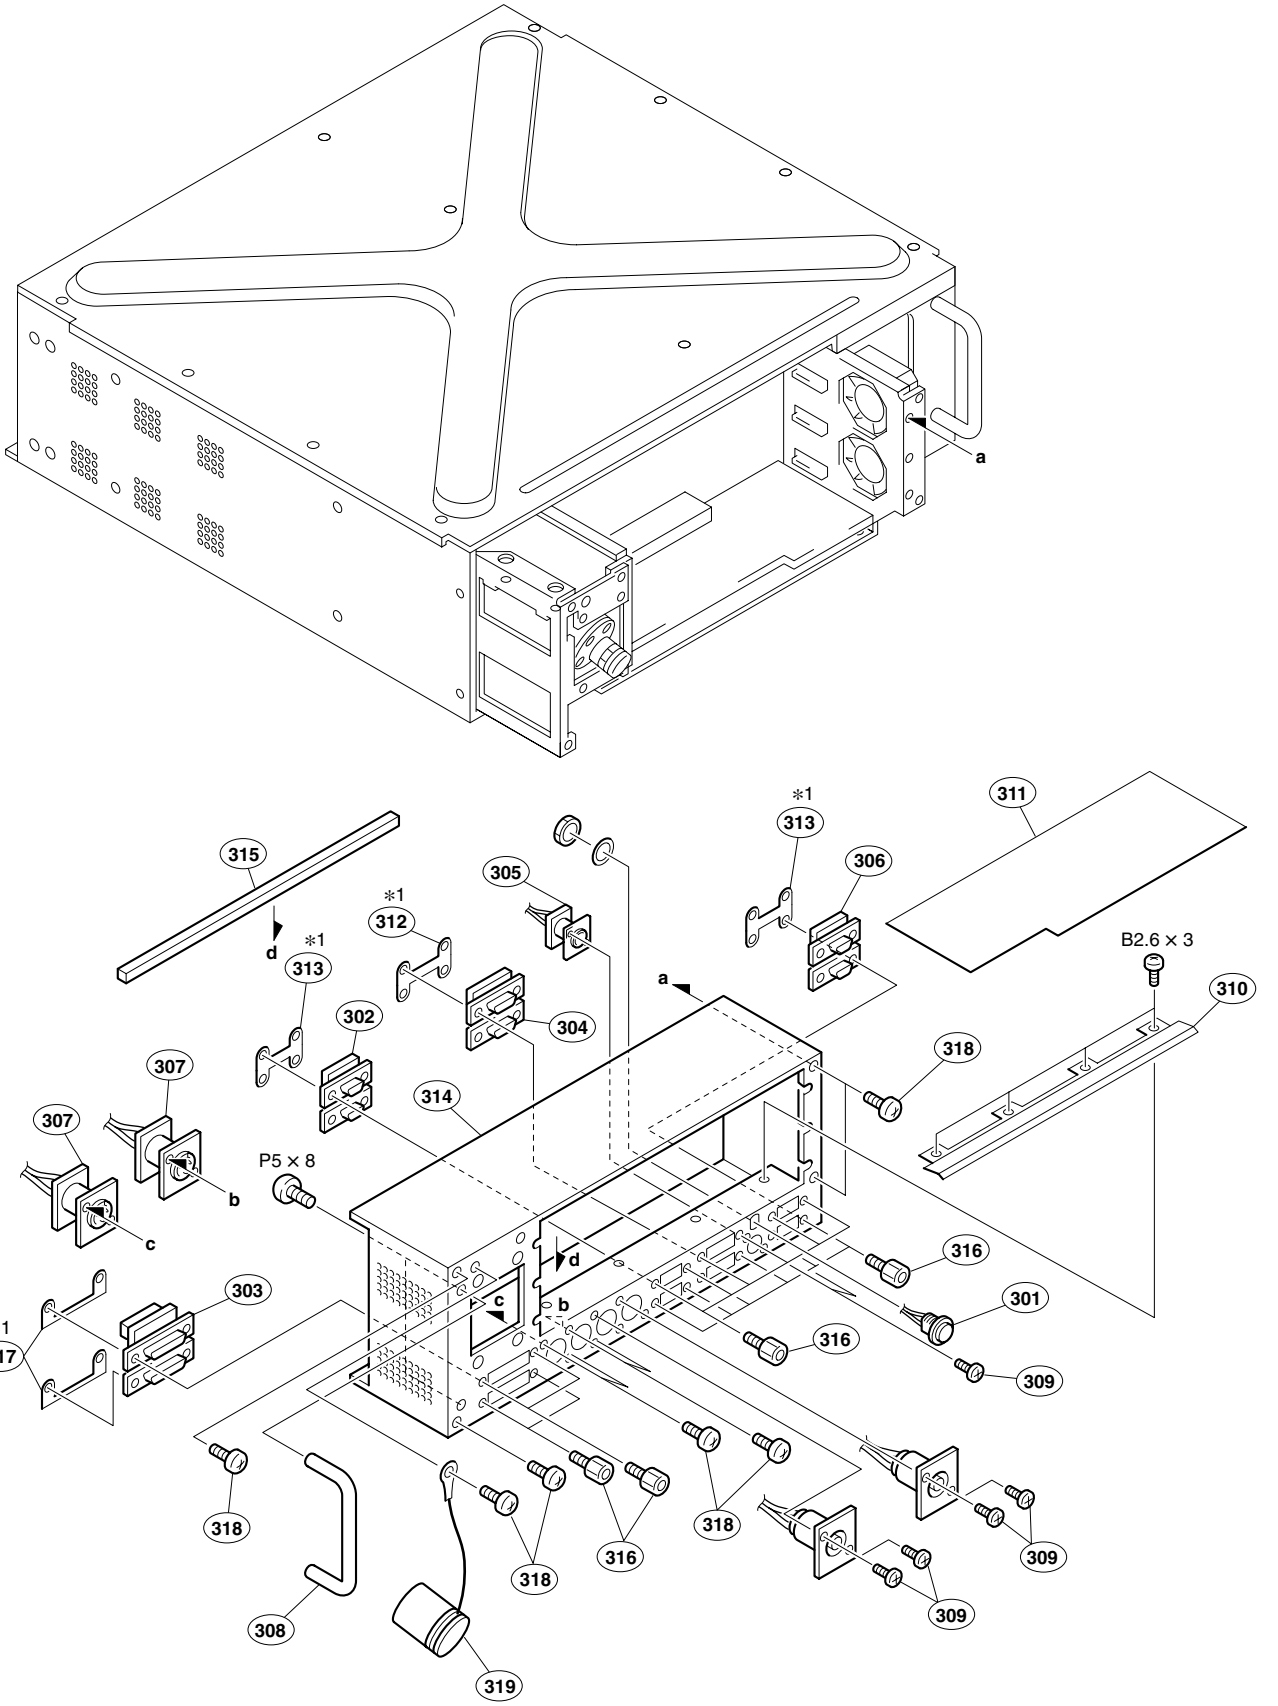
a
*1
311
313
306
315
305
*1
312
d
*1
313
B2.6 × 3
310
a
302
304
318
307
314
307
P5 × 8
b
c
316
d
303
c
b
301
*1
317
316
309
318
316
318
318
309
309
308
319

No.	Part No.	SP	Description
*1 : Serial No. 10001 through 10005 (CCU-900 UC)			
	Serial No. 40001 through 40007 (CCU-900P)		
301	A-8325-862-A	o	HARNESS ASSY, MICROPHONE
302	1-676-620-11	o	PRINTED CIRCUIT BOARD, CN-1637
303	1-676-621-11	o	PRINTED CIRCUIT BOARD, CN-1638
304	1-676-622-11	o	PRINTED CIRCUIT BOARD, CN-1636
305	1-676-623-11	o	PRINTED CIRCUIT BOARD, CN-1618
306	1-676-624-11	o	PRINTED CIRCUIT BOARD, CN-1635
307	1-676-905-11	o	PRINTED CIRCUIT BOARD, CN-1619
308	2-378-801-01	s	HANDLE
309	3-165-162-01	s	SCREW (+P 2.6X5) (TYPE 1) (ST)
310	3-627-225-03	o	SPRING, SHIELD
311	3-627-286-01	o	INSULATER, REAR
*1 312	3-627-800-01	o	PLATE NUT, D-SUB 15P
*1 313	3-627-813-02	o	PLATE NUT, D-SUB 9P
314	3-627-842-02	o	REAR PANEL
315	3-627-843-01	o	SOFT SHIELD, PANEL
316	3-673-910-31	s	SCREW, CONNECTOR
*1 317	3-675-929-00	o	PLATE, NUT (50P)
318	3-725-295-21	s	SCREW, (+) (B3)
319	9-880-278-01	s	CAP, CONNECTOR

Hardware

	7-621-775-08	s	SCREW +B 2.6X3
	7-682-574-04	s	SCREW +B 5X8

Optical Unit

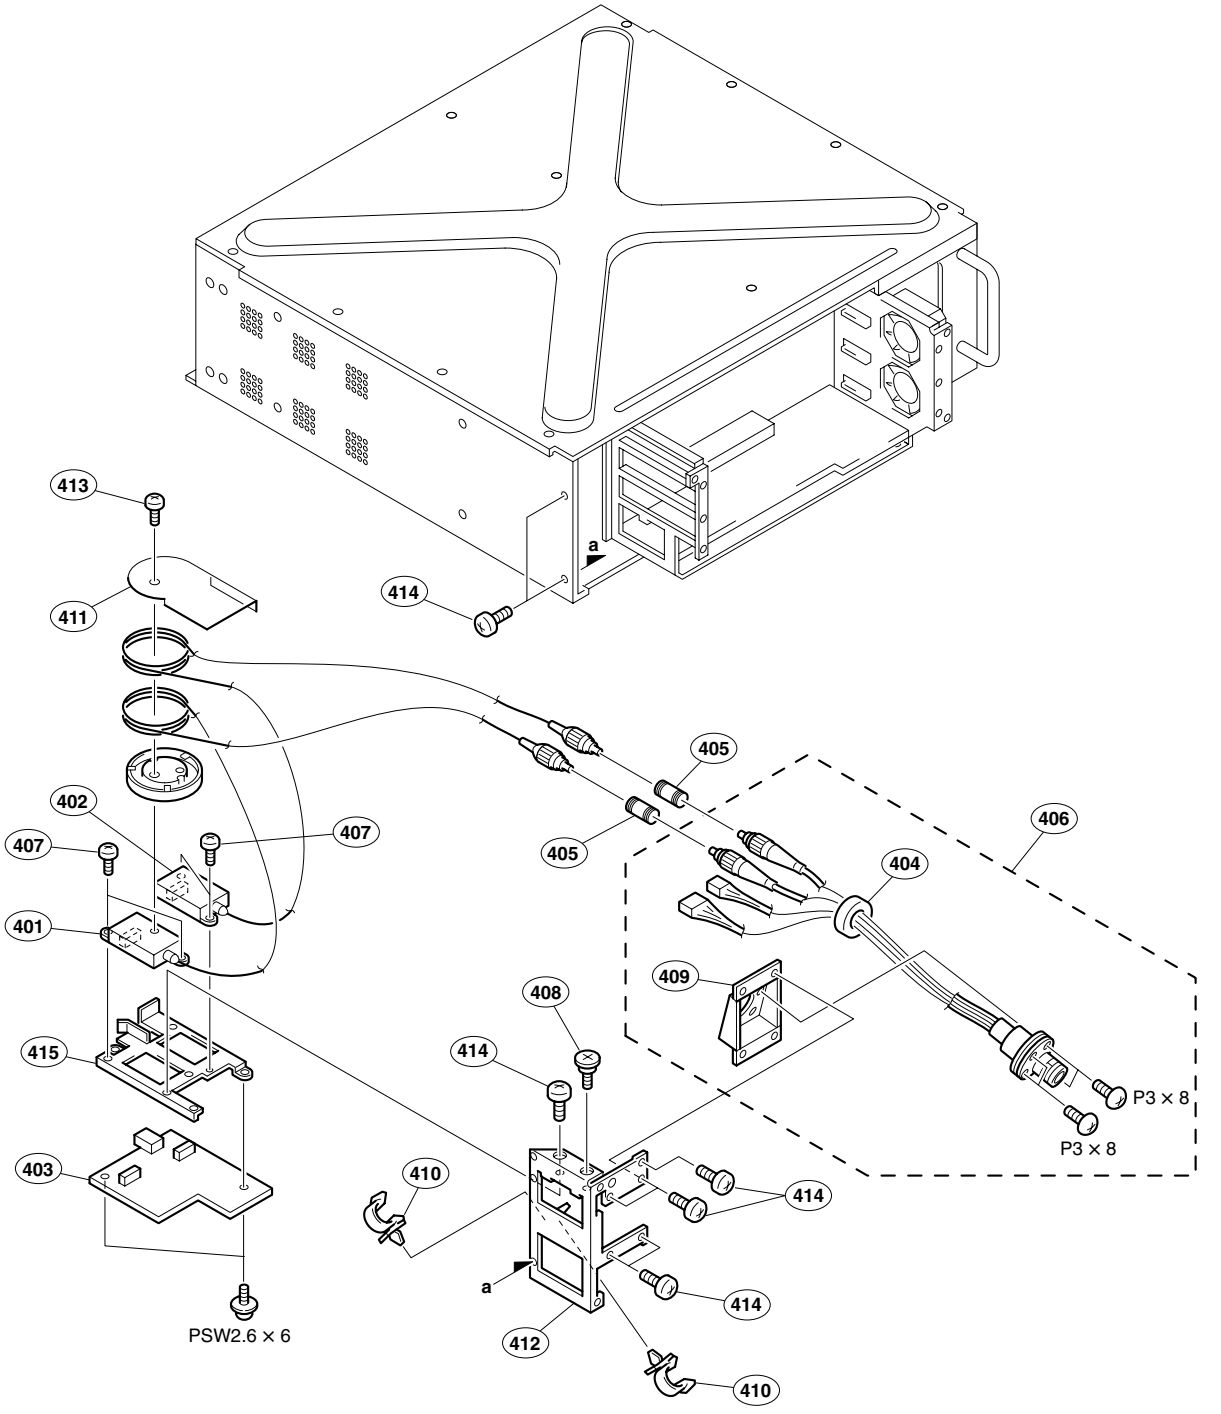

No.	Part No.	SP	Description
401	⚠ A-8327-703-A	o	TX-63 ASSY
402	⚠ A-8327-702-A	o	RX-42 ASSY
403	A-8325-784-A	o	MOUNTED CIRCUIT BOARD, CN-1925
404	1-543-609-11	s	CORE, FERRITE
405	1-774-993-11	o	CONNECTOR, OPTICAL (FC TYPE)
406	⚠ 1-777-204-21	o	CABLE ASSEMBLY, ENCAPSULATE (F)
407	3-165-162-01	s	SCREW(+P 2.6X5) (TYPE 1) (ST)
408	3-613-164-21	o	SHAFT, STEP
409	3-627-731-01	o	CN BOX
410	3-627-847-01		ROD HOLDER

No.	Part No.	SP	Description
411	3-628-146-01	o	REEL COVER
412	3-631-553-01	o	PLATE.OPTICAL UNIT (P.C.D.)
413	3-370-476-01	o	SCREW, (NYLOCK +B 2X5)
414	3-725-295-21	s	SCREW, (+) (B3)
415	3-628-173-03	o	HOLDER, TX RX

Hardware

	7-621-759-40	s	SCREW +PSW 2.6X6
	7-682-148-09	s	SCREW +P 3X8

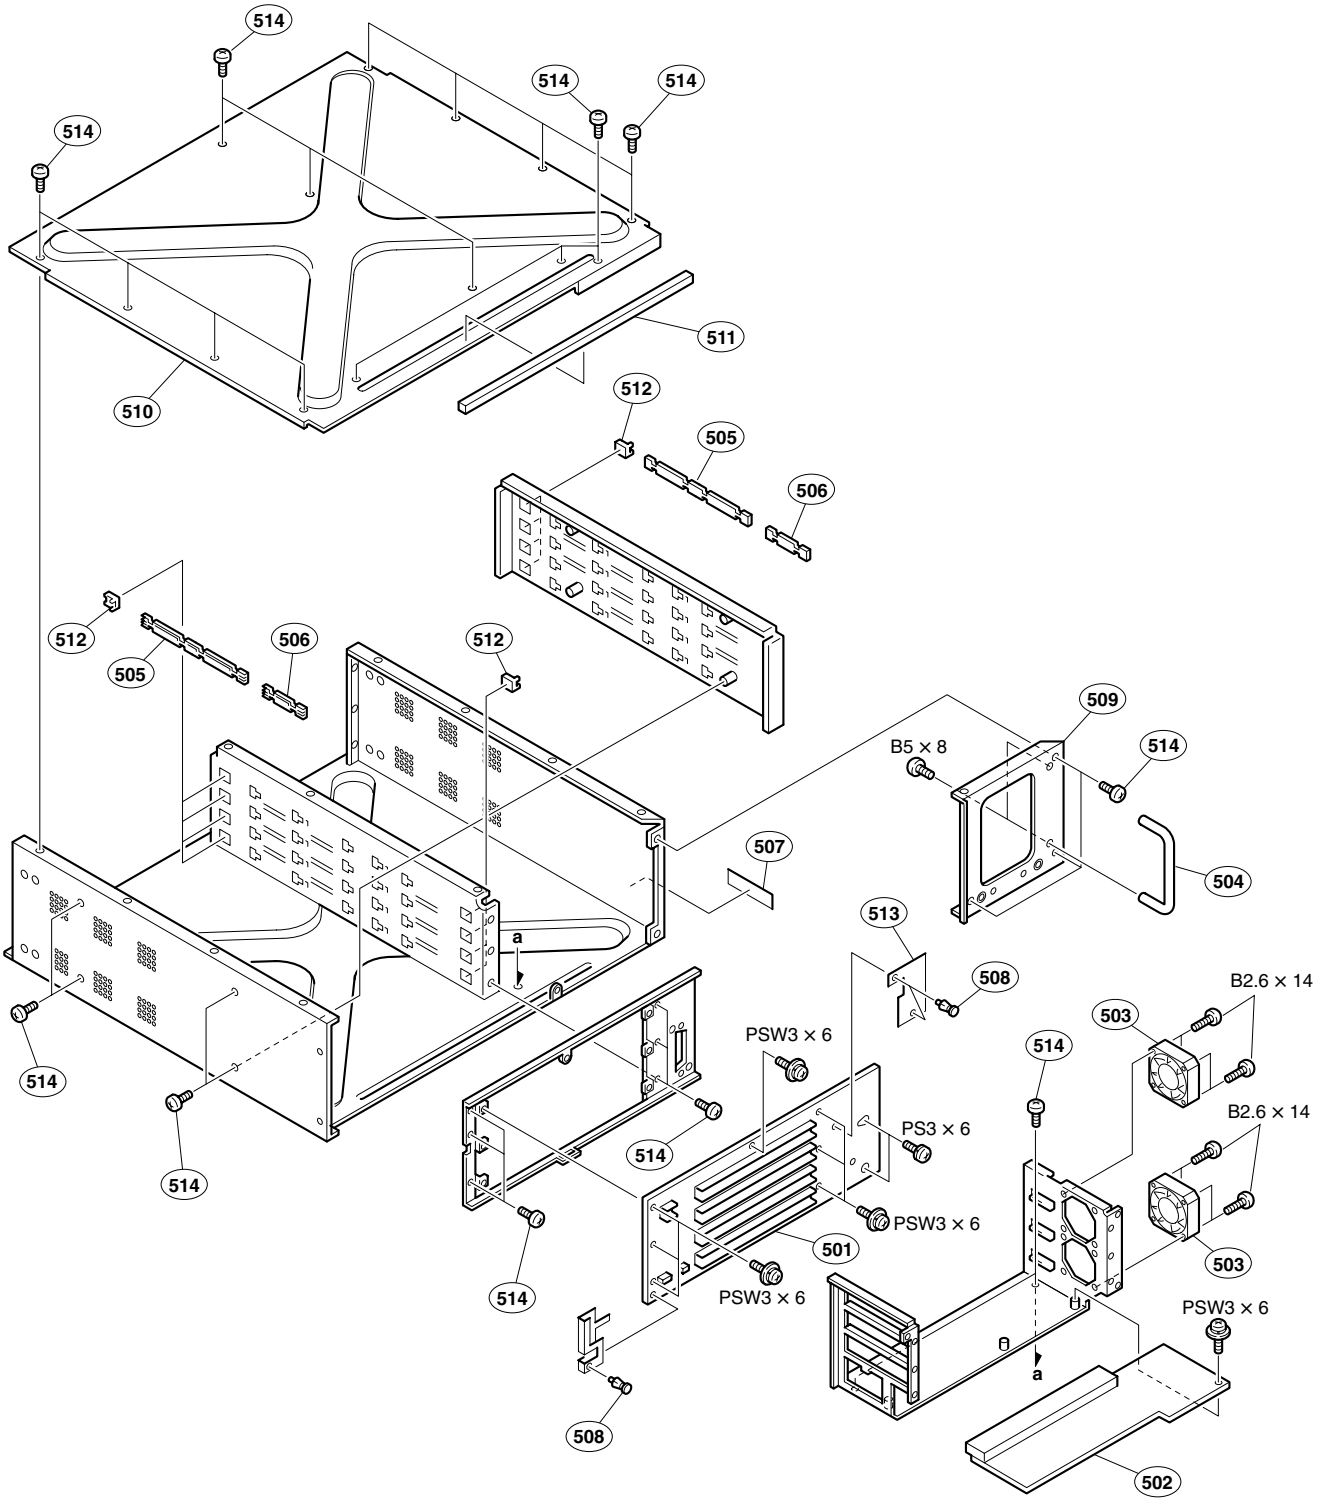

No.	Part No.	SP	Description
501	A-8325-793-A	o	MOUNTED CIRCUIT BOARD, MB-647
502	A-8325-796-A	o	MOUNTED CIRCUIT BOARD, CN-1617
503	1-698-059-11	s	FAN, DC (12V) (40X40)
504	2-378-801-01	s	HANDLE
505	3-169-099-01	o	RAIL, PC BOARD GUIDE
506	3-174-468-01	o	RAIL (60), PC BOARD GUIDE
507	3-188-177-22	o	LABEL, FCC/IC (CLASS A)
508	3-531-576-11	s	RIVET, NYLON
509	3-627-244-02	o	REAR PANEL, PS
510	3-627-726-01	o	TOP CHASSIS
511	3-627-843-01	o	SOFT SHIELD, PANEL
512	3-681-043-01	o	GUIDE
513	3-693-964-02	o	SHEET, INSULATING
514	3-725-295-21	s	SCREW, (+) (B3)

Hardware

	7-621-775-78	s	SCREW +B 2.6X14
	7-682-574-04	s	SCREW +B 5X8
	7-682-947-01	s	SCREW +PSW 3X6

1-3. Electrical Parts List

AT-122 BOARD
---

*1 : Serial No. 10001 through 10010 (CCU-900 UC)
Serial No. 40001 through 40007 (CCU-900P)
*2 : Serial No. 10011 and higher (CCU-900 UC)
Serial No. 30001 and higher (CCU-900 J)
Serial No. 40008 and higher (CCU-900P)
*3 : Serial No. 10001 through 10021 (CCU-900 UC)
Serial No. 30001 through 30003 (CCU-900 J)
Serial No. 40001 through 40044 (CCU-900P)
*4 : Serial No. 10022 and higher (CCU-900 UC)
Serial No. 30004 and higher (CCU-900 J)
Serial No. 40045 and higher (CCU-900P)

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8325-789-A	o	MOUNTED CIRCUIT BOARD, AT-122
1pc	3-602-483-01	s	KNOB,VOLUME 6
1pc	3-627-839-01	o	PC BOARD PANEL AT-122
1pc	3-681-020-01	o	PC SHIELD PLATE
2pcs	3-681-042-01	o	LEVER, PC BOARD(1)
2pcs	3-681-045-01	o	LEVER, PC BOARD(2)
4pcs	7-621-759-40	s	SCREW +PSW 2.6X6(EP-FE/ZNBK/CM
4pcs	7-626-320-11	s	SPRING PIN,3X8 (STEEL)
5pcs	7-682-947-01	s	SCREW +PSW 3X6
C1	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C2	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C3	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C4	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C5	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C7	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C9	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C11	1-135-212-21	s	CAPACITOR TANTALUM 2.2MF/35V
C13	1-135-212-21	s	CAPACITOR TANTALUM 2.2MF/35V
C14	1-135-212-21	s	CAPACITOR TANTALUM 2.2MF/35V
C15	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C17	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C19	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C20	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C21	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C22	1-126-400-11	s	CAPACITOR ELECT 22MF/35V(CHIP)
C23	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C24	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C25	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C26	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C27	1-126-391-11	s	CAPACITOR ELECT 47MF/6.3V(105)
C28	1-107-689-21	s	CAPACITOR,TANTALUM 1MF/35V
C29	1-107-689-21	s	CAPACITOR,TANTALUM 1MF/35V
C30	1-162-967-11	s	CAPACITOR,CERAMIC 3300PF/50V B
C31	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C32	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C33	1-104-913-11	s	CAPACITOR,TANTALUM 10MF/16V
C34	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C35	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C36	1-113-682-11	s	CAPACITOR,TANTALUM 33MF/10V
C37	1-126-391-11	s	CAPACITOR ELECT 47MF/6.3V(105)
C38	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C39	1-162-968-11	s	CAPACITOR,CERAMIC 4700PF/50V B
C40	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C41	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C42	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C43	1-162-967-11	s	CAPACITOR,CERAMIC 3300PF/50V B
C44	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C45	1-107-884-11	s	CAPACITOR,ELECT 1000MF/16V

(AT-122 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C46	1-107-884-11	s	CAPACITOR,ELECT 1000MF/16V
C47	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C48	1-107-689-21	s	CAPACITOR,TANTALUM 1MF/35V
C49	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C50	1-162-968-11	s	CAPACITOR,CERAMIC 4700PF/50V B
C51	1-162-968-11	s	CAPACITOR,CERAMIC 4700PF/50V B
C52	1-126-391-11	s	CAPACITOR ELECT 47MF/6.3V(105)
C53	1-126-400-11	s	CAPACITOR ELECT 22MF/35V(CHIP)
C54	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C55	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C56	1-113-682-11	s	CAPACITOR,TANTALUM 33MF/10V
C57	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C59	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C78	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C79	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C81	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C82	1-135-212-21	s	CAPACITOR TANTALUM 2.2MF/35V
C84	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C85	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C86	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C87	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C88	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C89	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C90	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C91	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C92	1-128-391-11	s	CAPACITOR,ELECT 330MF/6.3V
C96	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C97	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C101	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C102	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C103	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C104	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C105	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C106	1-104-913-11	s	CAPACITOR,TANTALUM 10MF/16V
C107	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C108	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C109	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C110	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C111	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C112	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C114	1-104-913-11	s	CAPACITOR,TANTALUM 10MF/16V
C115	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C116	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C117	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C118	1-104-913-11	s	CAPACITOR,TANTALUM 10MF/16V
C119	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C120	1-104-823-11	s	CAPACITOR,TANTALUM 47MF/16V
C121	1-104-823-11	s	CAPACITOR,TANTALUM 47MF/16V
C122	1-104-913-11	s	CAPACITOR,TANTALUM 10MF/16V
C123	1-104-914-11	s	CAPACITOR,TANTALUM 22MF/16V
C124	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C125	1-104-914-11	s	CAPACITOR,TANTALUM 22MF/16V
C126	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C127	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C128	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C130	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C132	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C135	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C136	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F

(AT-122 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C137	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C138	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C139	1-162-958-11	s	CAPACITOR,CERAMIC 270PF/50V SL
C140	1-162-958-11	s	CAPACITOR,CERAMIC 270PF/50V SL
C141	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C142	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C143	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C144	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C145	1-107-689-21	s	CAPACITOR,TANTALUM 1MF/35V
C146	1-107-689-21	s	CAPACITOR,TANTALUM 1MF/35V
C147	1-162-924-11	s	CAPACITOR,CERAMIC 56PF/50V CH
C149	1-107-689-21	s	CAPACITOR,TANTALUM 1MF/35V
C150	1-107-689-21	s	CAPACITOR,TANTALUM 1MF/35V
C151	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C152	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C153	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C154	1-104-914-11	s	CAPACITOR,TANTALUM 22MF/16V
C155	1-162-966-11	s	CAPACITOR,CERAMIC 2200PF/50V B
C156	1-162-966-11	s	CAPACITOR,CERAMIC 2200PF/50V B
C157	1-126-391-11	s	CAPACITOR ELECT 47MF/6.3V(105)
C158	1-162-958-11	s	CAPACITOR,CERAMIC 270PF/50V SL
C159	1-162-919-11	s	CAPACITOR,CERAMIC 22PF/50V CH
C160	1-162-958-11	s	CAPACITOR,CERAMIC 270PF/50V SL
C161	1-162-919-11	s	CAPACITOR,CERAMIC 22PF/50V CH
C162	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C163	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C164	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C165	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C167	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C168	1-104-913-11	s	CAPACITOR,TANTALUM 10MF/16V
C169	1-104-913-11	s	CAPACITOR,TANTALUM 10MF/16V
C170	1-162-919-11	s	CAPACITOR,CERAMIC 22PF/50V CH
C171	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C172	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C173	1-104-913-11	s	CAPACITOR,TANTALUM 10MF/16V
C174	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C175	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C176	1-104-913-11	s	CAPACITOR,TANTALUM 10MF/16V
C177	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C178	1-104-913-11	s	CAPACITOR,TANTALUM 10MF/16V
C179	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C180	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C181	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C182	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C183	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C191	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C192	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C193	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C194	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C195	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C196	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C197	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C198	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C206	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C216	1-126-391-11	s	CAPACITOR ELECT 47MF/6.3V(105)
C217	1-126-391-11	s	CAPACITOR ELECT 47MF/6.3V(105)
C220	1-126-391-11	s	CAPACITOR ELECT 47MF/6.3V(105)
C221	1-126-391-11	s	CAPACITOR ELECT 47MF/6.3V(105)
C222	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F

(AT-122 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C223	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C226	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C227	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C228	1-162-968-11	s	CAPACITOR,CERAMIC 4700PF/50V B
C229	1-162-968-11	s	CAPACITOR,CERAMIC 4700PF/50V B
C230	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C236	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C238	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C239	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C242	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C243	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C246	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C247	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C248	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C250	1-164-315-11	s	CAPACITOR,CERAMIC 470PF/50V CH
C251	1-164-315-11	s	CAPACITOR,CERAMIC 470PF/50V CH
C252	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C254	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C255	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C256	1-164-315-11	s	CAPACITOR,CERAMIC 470PF/50V CH
C257	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C258	1-164-315-11	s	CAPACITOR,CERAMIC 470PF/50V CH
C259	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C260	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C261	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C262	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C263	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C264	1-135-177-21	s	CAPACITOR TANTALUM 1MF/25V
C265	1-135-177-21	s	CAPACITOR TANTALUM 1MF/25V
C266	1-113-642-11	s	CAPACITOR, TANTALUM 47MF/10V
C267	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C268	1-135-210-11	s	CAPACITOR,TANTALUM 4.7MF/10V
C269	1-135-210-11	s	CAPACITOR,TANTALUM 4.7MF/10V
C270	1-113-642-11	s	CAPACITOR, TANTALUM 47MF/10V
C271	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C272	1-135-210-11	s	CAPACITOR,TANTALUM 4.7MF/10V
C273	1-135-073-00	s	CAPACITOR TANTALUM 0.33MF/35V
C274	1-135-073-00	s	CAPACITOR TANTALUM 0.33MF/35V
C275	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C405	1-135-210-11	s	CAPACITOR,TANTALUM 4.7MF/10V
C406	1-113-642-11	s	CAPACITOR, TANTALUM 47MF/10V
C407	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C408	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C409	1-113-642-11	s	CAPACITOR, TANTALUM 47MF/10V
C411	1-135-210-11	s	CAPACITOR,TANTALUM 4.7MF/10V
C412	1-135-210-11	s	CAPACITOR,TANTALUM 4.7MF/10V
C413	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C414	1-135-333-11	s	CAPACITOR TANTALUM 1MF/16V
C415	1-126-391-11	s	CAPACITOR ELECT 47MF/6.3V(105)
C416	1-126-391-11	s	CAPACITOR ELECT 47MF/6.3V(105)
C417	1-126-391-11	s	CAPACITOR ELECT 47MF/6.3V(105)
C418	1-126-391-11	s	CAPACITOR ELECT 47MF/6.3V(105)
C419	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C420	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C421	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C422	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C423	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C424	1-135-333-11	s	CAPACITOR TANTALUM 1MF/16V
C425	1-135-073-00	s	CAPACITOR TANTALUM 0.33MF/35V

(AT-122 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C426	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C427	1-135-073-00	s	CAPACITOR TANTALUM 0.33MF/35V
C429	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C430	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C431	1-164-315-11	s	CAPACITOR,CERAMIC 470PF/50V CH
C432	1-164-315-11	s	CAPACITOR,CERAMIC 470PF/50V CH
C433	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C434	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C437	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C438	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C441	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C442	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C443	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C444	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C445	1-162-915-11	s	CAPACITOR,CERAMIC 10PF/50V CH
C447	1-162-915-11	s	CAPACITOR,CERAMIC 10PF/50V CH
C449	1-164-315-11	s	CAPACITOR,CERAMIC 470PF/50V CH
C450	1-164-315-11	s	CAPACITOR,CERAMIC 470PF/50V CH
C453	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C454	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C455	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C456	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C457	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C458	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C459	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C460	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C461	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C462	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C463	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C464	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C465	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C466	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C467	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C468	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C469	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C470	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C471	1-128-406-11	s	CAPACITOR ERECT 33MF/50V(CHIP)
C472	1-128-406-11	s	CAPACITOR ERECT 33MF/50V(CHIP)
C473	1-128-406-11	s	CAPACITOR ERECT 33MF/50V(CHIP)
C474	1-128-406-11	s	CAPACITOR ERECT 33MF/50V(CHIP)
C475	1-128-406-11	s	CAPACITOR ERECT 33MF/50V(CHIP)
C476	1-128-406-11	s	CAPACITOR ERECT 33MF/50V(CHIP)
C477	1-128-406-11	s	CAPACITOR ERECT 33MF/50V(CHIP)
C478	1-128-406-11	s	CAPACITOR ERECT 33MF/50V(CHIP)
C481	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C482	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C485	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C486	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C489	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C490	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C493	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C494	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C497	1-128-407-11	s	CAPACITOR, ELECT 47MF/50V CHIP
C498	1-128-407-11	s	CAPACITOR, ELECT 47MF/50V CHIP
C503	1-128-407-11	s	CAPACITOR, ELECT 47MF/50V CHIP
C504	1-128-407-11	s	CAPACITOR, ELECT 47MF/50V CHIP
C505	1-162-915-11	s	CAPACITOR,CERAMIC 10PF/50V CH
C506	1-162-915-11	s	CAPACITOR,CERAMIC 10PF/50V CH
C507	1-162-915-11	s	CAPACITOR,CERAMIC 10PF/50V CH

(AT-122 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C508	1-162-915-11	s	CAPACITOR,CERAMIC 10PF/50V CH
C509	1-162-915-11	s	CAPACITOR,CERAMIC 10PF/50V CH
C510	1-162-915-11	s	CAPACITOR,CERAMIC 10PF/50V CH
C511	1-162-915-11	s	CAPACITOR,CERAMIC 10PF/50V CH
C512	1-162-915-11	s	CAPACITOR,CERAMIC 10PF/50V CH
C701	1-126-391-11	s	CAPACITOR ELECT 47MF/6.3V(105)
C702	1-126-391-11	s	CAPACITOR ELECT 47MF/6.3V(105)
C703	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C704	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C705	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C706	1-126-391-11	s	CAPACITOR ELECT 47MF/6.3V(105)
C709	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C710	1-164-505-11	s	CAPACITOR,CHIP CERAMIC 2.2MF
C711	1-126-391-11	s	CAPACITOR ELECT 47MF/6.3V(105)
C714	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C715	1-164-505-11	s	CAPACITOR,CHIP CERAMIC 2.2MF
C716 *1	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C717	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C718	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C719	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C720	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C721	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C722	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C723	1-164-505-11	s	CAPACITOR,CHIP CERAMIC 2.2MF
C724	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C725	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C726	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C727	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C728	1-104-914-11	s	CAPACITOR,TANTALUM 22MF/16V
C729	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C730	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C731	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C732	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C733	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C734	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C735	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C736	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C737	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C738	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C739	1-162-924-11	s	CAPACITOR,CERAMIC 56PF/50V CH
C740	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C741	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C742	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C743	1-162-924-11	s	CAPACITOR,CERAMIC 56PF/50V CH
C744	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C745	1-128-397-21	s	CAPACITOR ELECT 100MF/16V CHIP
C746	1-128-397-21	s	CAPACITOR ELECT 100MF/16V CHIP
C747	1-128-397-21	s	CAPACITOR ELECT 100MF/16V CHIP
C748	1-128-397-21	s	CAPACITOR ELECT 100MF/16V CHIP
C756	1-164-505-11	s	CAPACITOR,CHIP CERAMIC 2.2MF
C757	1-104-914-11	s	CAPACITOR,TANTALUM 22MF/16V
C758	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C759	1-126-391-11	s	CAPACITOR ELECT 47MF/6.3V(105)
C760	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C761	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C762	1-126-391-11	s	CAPACITOR ELECT 47MF/6.3V(105)
C763 *1	1-126-153-11	s	CAPACITOR,ELECT 22MF/6.3V
C763 *2	1-104-914-11	s	CAPACITOR,TANTALUM 22MF/16V
C764 *2	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F

(AT-122 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C765 *2	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C766 *2	1-162-966-11	s	CAPACITOR,CERAMIC 2200PF/50V B
C767 *2	1-162-958-11	s	CAPACITOR,CERAMIC 270PF/50V SL
C791	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C792	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C851	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C852	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C853	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C854	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C856	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C857	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C858	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C860	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C862	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C864	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C871	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C872	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C882	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C884	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C885	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C886	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C887	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C888	1-164-315-11	s	CAPACITOR,CERAMIC 470PF/50V CH
C889	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C1001	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1002	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1003	1-128-391-11	s	CAPACITOR,ELECT 330MF/6.3V
C1004	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1005	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1006	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1007	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1010	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1011	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1012	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1013	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1014	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1017	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1018	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1019	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1020	1-162-919-11	s	CAPACITOR,CERAMIC 22PF/50V CH
C1021	1-162-919-11	s	CAPACITOR,CERAMIC 22PF/50V CH
C1022	1-162-919-11	s	CAPACITOR,CERAMIC 22PF/50V CH
C1023	1-162-919-11	s	CAPACITOR,CERAMIC 22PF/50V CH
C1024	1-162-919-11	s	CAPACITOR,CERAMIC 22PF/50V CH
C1025	1-162-919-11	s	CAPACITOR,CERAMIC 22PF/50V CH
C1026	1-162-919-11	s	CAPACITOR,CERAMIC 22PF/50V CH
C1027	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1028	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1029	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1030	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1031	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1032	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1033	1-135-212-21	s	CAPACITOR TANTALUM 2.2MF/35V
C1034	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1035	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1036	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1037	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1038	1-115-156-11	s	CAPACITOR,CERAMIC 1MF/10V(1608
C1039	1-115-156-11	s	CAPACITOR,CERAMIC 1MF/10V(1608

(AT-122 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1040 *2	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1101	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1102	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1103	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1104	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1105	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1106	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1107	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1108	1-104-913-11	s	CAPACITOR,TANTALUM 10MF/16V
C1109	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1110	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1111	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1112	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1113	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1114	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1115	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1116	1-162-919-11	s	CAPACITOR,CERAMIC 22PF/50V CH
C1117	1-162-919-11	s	CAPACITOR,CERAMIC 22PF/50V CH
C1118	1-162-919-11	s	CAPACITOR,CERAMIC 22PF/50V CH
C1119	1-162-919-11	s	CAPACITOR,CERAMIC 22PF/50V CH
C1120	1-162-919-11	s	CAPACITOR,CERAMIC 22PF/50V CH
C1121	1-162-919-11	s	CAPACITOR,CERAMIC 22PF/50V CH
C1122	1-162-919-11	s	CAPACITOR,CERAMIC 22PF/50V CH
C1123	1-162-919-11	s	CAPACITOR,CERAMIC 22PF/50V CH
C1124	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1125	1-162-919-11	s	CAPACITOR,CERAMIC 22PF/50V CH
C1126	1-162-919-11	s	CAPACITOR,CERAMIC 22PF/50V CH
C1127	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1128	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1129	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1130	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1131	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1132	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1133	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1134	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1135	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1136	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1137	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1138	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1139	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1140	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1141	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1142	1-162-958-11	s	CAPACITOR,CERAMIC 270PF/50V SL
C1143	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1144	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1145	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1146	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1147	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1148	1-113-642-11	s	CAPACITOR, TANTALUM 47MF/10V
C1149	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1150	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1151	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1152	1-162-921-11	s	CAPACITOR,CERAMIC 33PF/50V CH
C1153	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1154	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1155	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1156	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1157	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1158	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F

(AT-122 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1159	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1160	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1161	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1162 *2	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1163	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1164	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1165 *2	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1166 *2	1-162-919-11	s	CAPACITOR,CERAMIC 22PF/50V CH
C1167 *2	1-162-919-11	s	CAPACITOR,CERAMIC 22PF/50V CH
C1168 *2	1-162-919-11	s	CAPACITOR,CERAMIC 22PF/50V CH
C1169 *2	1-162-919-11	s	CAPACITOR,CERAMIC 22PF/50V CH
C1170 *2	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
D1	8-719-063-83	s	LED SML-510MWT86
D2	8-719-063-83	s	LED SML-510MWT86
D3	8-719-063-83	s	LED SML-510MWT86
D4	8-719-063-83	s	LED SML-510MWT86
D5	8-719-063-83	s	LED SML-510MWT86
D6	8-719-404-35	s	DIODE MA141WK
D7	8-719-404-35	s	DIODE MA141WK
D8	8-719-024-81	s	DIODE 1SS300-TE85L
D9	8-719-404-35	s	DIODE MA141WK
D10	8-719-021-31	s	DIODE UZM5.1B
D11	8-719-157-23	s	DIODE RD4.7M-B
D12	8-719-800-76	s	DIODE 1SS226
D13	8-719-024-81	s	DIODE 1SS300-TE85L
D14	8-719-106-53	s	DIODE RD10M-B2
D15	8-719-106-53	s	DIODE RD10M-B2
D16	8-719-041-79	s	DIODE MA721WA-TX
D17	8-719-404-35	s	DIODE MA141WK
D18	8-719-024-81	s	DIODE 1SS300-TE85L
D19	8-719-024-81	s	DIODE 1SS300-TE85L
D20	8-719-021-31	s	DIODE UZM5.1B
D21	8-719-157-36	s	DIODE RD6.8M-B
D22	8-719-024-81	s	DIODE 1SS300-TE85L
D23	8-719-404-35	s	DIODE MA141WK
D50	8-719-157-23	s	DIODE RD4.7M-B
D51	8-719-157-23	s	DIODE RD4.7M-B
D52	8-719-157-23	s	DIODE RD4.7M-B
D81	8-719-157-23	s	DIODE RD4.7M-B
D96	8-719-058-14	s	LED CL-220PG-C-TS
D103	8-719-800-76	s	DIODE 1SS226
D202	8-719-159-85	s	DIODE RD2.OMB
D203	8-719-159-85	s	DIODE RD2.OMB
D204	8-719-159-85	s	DIODE RD2.OMB
D205	8-719-159-85	s	DIODE RD2.OMB
D208	8-719-041-79	s	DIODE MA721WA-TX
D209	8-719-040-04	s	DIODE MA-721WK-TX
D403	8-719-159-85	s	DIODE RD2.OMB
D404	8-719-159-85	s	DIODE RD2.OMB
D405	8-719-159-85	s	DIODE RD2.OMB
D406	8-719-159-85	s	DIODE RD2.OMB
D407	8-719-159-85	s	DIODE RD2.OMB
D408	8-719-159-85	s	DIODE RD2.OMB
D409	8-719-159-85	s	DIODE RD2.OMB
D410	8-719-159-85	s	DIODE RD2.OMB
D411	8-719-040-04	s	DIODE MA-721WK-TX
D412	8-719-041-79	s	DIODE MA721WA-TX
D702	8-719-820-41	s	DIODE 1SS302

(AT-122 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
D703	8-719-157-23	s	DIODE RD4.7M-B
D704	8-719-157-23	s	DIODE RD4.7M-B
D705	8-719-404-35	s	DIODE MA141WK
D707	8-719-404-35	s	DIODE MA141WK
D708	8-719-404-35	s	DIODE MA141WK
D709	8-719-024-81	s	DIODE 1SS300-TE85L
D710	8-719-404-35	s	DIODE MA141WK
D711	8-719-404-35	s	DIODE MA141WK
D712	8-719-820-41	s	DIODE 1SS302
D714	8-719-024-81	s	DIODE 1SS300-TE85L
D715	8-719-404-35	s	DIODE MA141WK
D716	8-719-404-35	s	DIODE MA141WK
D717	8-719-404-35	s	DIODE MA141WK
D718	8-719-024-81	s	DIODE 1SS300-TE85L
D719	8-719-404-35	s	DIODE MA141WK
D720	8-719-159-85	s	DIODE RD2.OMB
D721	8-719-159-85	s	DIODE RD2.OMB
D722	8-719-820-41	s	DIODE 1SS302
D723	8-719-820-41	s	DIODE 1SS302
D724	8-719-024-81	s	DIODE 1SS300-TE85L
D1001	8-719-947-01	s	DIODE FMP1
D1002	8-719-947-01	s	DIODE FMP1
D1003	8-719-947-01	s	DIODE FMP1
D1004	8-719-947-01	s	DIODE FMP1
D1005	8-719-947-01	s	DIODE FMP1
D1006	8-719-947-01	s	DIODE FMP1
D1007	8-719-947-01	s	DIODE FMP1
D1008	8-719-947-01	s	DIODE FMP1
D1010	8-719-404-35	s	DIODE MA141WK
D1101	8-719-059-59	s	DIODE MA3J74200LSO
EN1	1-473-315-21	s	ENCODER, ROTARY
IC1	8-759-906-53	s	IC TL062CPS
IC3	8-759-906-53	s	IC TL062CPS
IC4	8-759-471-85	s	IC 74VHC00MTCX
IC5	8-759-906-53	s	IC TL062CPS
IC6	8-759-195-81	s	IC TC7S86FU
IC7	8-759-711-58	s	IC NJM78L05UA
IC9	8-759-662-35	s	IC 74VHCT04MTCX
IC10	8-759-030-16	s	IC MC34182M
IC11	8-759-101-12	s	IC UPC311G2
IC12	8-759-274-66	s	IC LM4040BIM3-5.0
IC13	8-759-711-58	s	IC NJM78L05UA
IC14	8-759-195-81	s	IC TC7S86FU
IC81	8-759-906-53	s	IC TL062CPS
IC82 *1	8-759-175-30	s	IC NJM78L12UA (TE1)
IC82 *2	8-759-666-00	s	IC TA78DS12F (TE12L)
IC91	8-759-973-71	s	IC TL7705CPS-B
IC101	8-759-662-35	s	IC 74VHCT04MTCX
IC102	8-759-669-75	s	IC TLC2932IPWR
IC103	8-759-472-31	s	IC 74VHC163MTCX
IC104	8-759-082-57	s	IC TC7W04FU
IC105	8-759-472-31	s	IC 74VHC163MTCX
IC106	8-759-530-31	s	IC TC74VHC4040FT(EL)
IC107	8-759-386-26	s	IC 74LCX574MTCX
IC108	8-759-472-31	s	IC 74VHC163MTCX
IC109	8-759-662-35	s	IC 74VHCT04MTCX
IC110	8-759-348-81	s	IC SM5843AS1 (E2)
IC111	8-759-062-88	s	IC CXD8277Q

(AT-122 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC114 *1	8-759-593-53	s	IC PCM1702U/2K
IC114 *2	8-759-593-53	s	IC PCM1702U/2K
IC115 *1	8-759-593-53	s	IC PCM1702U/2K
IC115 *2	8-759-593-53	s	IC PCM1702U/2K
IC117	8-759-009-07	s	IC MC14053BF
IC119	8-759-700-96	s	IC NJM5534M
IC120	8-759-700-96	s	IC NJM5534M
IC121	8-759-422-21	s	IC NJM4580VTE2
IC122	8-759-422-21	s	IC NJM4580VTE2
IC123	8-759-369-73	s	IC NJM4556AM
IC124	8-759-369-73	s	IC NJM4556AM
IC125	8-759-669-66	s	IC TLC272CPWR
IC127	8-759-663-15	s	IC 74VHCT244AMTCX
IC205	8-759-422-21	s	IC NJM4580VTE2
IC207	8-759-422-21	s	IC NJM4580VTE2
IC208	8-759-422-21	s	IC NJM4580VTE2
IC209	8-759-422-21	s	IC NJM4580VTE2
IC211	8-759-422-21	s	IC NJM4580VTE2
IC212	8-759-422-21	s	IC NJM4580VTE2
IC214	8-759-637-48	s	IC PCM3002E/2K
IC218	8-759-009-07	s	IC MC14053BF
IC220	8-759-472-14	s	IC 74VHC125MTCX
IC222	8-759-082-57	s	IC TC7W04FU
IC403	8-759-422-21	s	IC NJM4580VTE2
IC404	8-759-422-21	s	IC NJM4580VTE2
IC405	8-759-422-21	s	IC NJM4580VTE2
IC406	8-759-422-21	s	IC NJM4580VTE2
IC407	8-759-009-07	s	IC MC14053BF
IC408	8-759-009-07	s	IC MC14053BF
IC409	8-759-422-21	s	IC NJM4580VTE2
IC410	8-759-422-21	s	IC NJM4580VTE2
IC411	8-759-009-07	s	IC MC14053BF
IC412	8-759-009-07	s	IC MC14053BF
IC413	8-759-422-21	s	IC NJM4580VTE2
IC414	8-759-422-21	s	IC NJM4580VTE2
IC415	8-759-009-07	s	IC MC14053BF
IC416	8-759-009-07	s	IC MC14053BF
IC417	8-759-422-21	s	IC NJM4580VTE2
IC418	8-759-422-21	s	IC NJM4580VTE2
IC419	8-759-422-21	s	IC NJM4580VTE2
IC420	8-759-422-21	s	IC NJM4580VTE2
IC421	8-759-369-73	s	IC NJM4556AM
IC422	8-759-369-73	s	IC NJM4556AM
IC423	8-759-009-07	s	IC MC14053BF
IC424	8-759-009-07	s	IC MC14053BF
IC426	8-759-422-21	s	IC NJM4580VTE2
IC428	8-759-422-21	s	IC NJM4580VTE2
IC430	8-759-369-73	s	IC NJM4556AM
IC432	8-759-369-73	s	IC NJM4556AM
IC433	8-759-637-48	s	IC PCM3002E/2K
IC701	8-759-058-58	s	IC TC7S04FU-TE85R
IC702	8-759-082-61	s	IC TC4W53FU
IC703	8-759-082-61	s	IC TC4W53FU
IC704	8-759-009-51	s	IC MC14538BF
IC705	8-759-369-73	s	IC NJM4556AM
IC706	8-759-471-85	s	IC 74VHC00MTCX
IC707	8-759-195-81	s	IC TC7S86FU
IC708	8-759-195-81	s	IC TC7S86FU
IC709	8-759-669-66	s	IC TLC272CPWR

(AT-122 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC710	8-759-471-85	s	IC 74VHC00MTCX
IC711	8-759-471-85	s	IC 74VHC00MTCX
IC712	8-759-669-66	s	IC TLC272CPWR
IC714	8-759-195-81	s	IC TC7S86FU
IC715	8-759-009-07	s	IC MC14053BF
IC716	8-759-009-07	s	IC MC14053BF
IC717	8-759-009-07	s	IC MC14053BF
IC718	8-759-422-21	s	IC NJM4580VTE2
IC719	8-759-422-21	s	IC NJM4580VTE2
IC720	8-759-422-21	s	IC NJM4580VTE2
IC721	8-759-085-04	s	IC M51132FP
IC722	8-759-422-21	s	IC NJM4580VTE2
IC723	8-759-369-73	s	IC NJM4556AM
IC724	8-759-009-07	s	IC MC14053BF
IC725	8-759-369-73	s	IC NJM4556AM
IC759	8-759-422-21	s	IC NJM4580VTE2
IC770 *2	8-759-082-61	s	IC TC4W53FU
IC851	8-759-374-66	s	IC MSM6688GS-2K
IC852	8-759-180-46	s	IC MSM6685JSDR1
IC870	8-759-085-67	s	IC LM339NS
IC871	8-759-471-85	s	IC 74VHC00MTCX
IC881	8-759-422-21	s	IC NJM4580VTE2
IC1001	8-759-471-96	s	IC 74VHC08MTCX
IC1002	8-759-082-57	s	IC TC7W04FU
IC1003	8-759-487-51	s	IC HN58C257AT10
IC1004	8-759-399-56	s	IC STK12C68-S45
IC1005	8-759-389-33	s	IC 74LCX244MTCX
IC1006	8-759-533-95	s	IC UPD6466GS-515
IC1007	6-800-174-01	o	IC 29F040-CCU900H-V1.07
IC1008	6-800-175-01	o	IC 29F040-CCU900L-V1.07
IC1009	8-759-389-33	s	IC 74LCX244MTCX
IC1010	8-759-663-15	s	IC 74VHCT244AMTCX
IC1011	8-759-585-28	s	IC CY62256VLL-70ZC-T2
IC1012	8-759-585-28	s	IC CY62256VLL-70ZC-T2
IC1013	8-759-533-95	s	IC UPD6466GS-515
IC1014	8-759-663-15	s	IC 74VHCT244AMTCX
IC1015	8-759-182-95	s	IC HD151015T
IC1016 *2	8-759-196-97	s	IC TC7SH32FU (TE85R)
IC1017	8-759-182-95	s	IC HD151015T
IC1018	8-759-472-31	s	IC 74VHC163MTCX
IC1019	8-759-369-92	s	IC M51958AFP (600D)
IC1020	8-759-058-62	s	IC TC7S08FU-TE85R
IC1021 *1	8-759-196-97	s	IC TC7SH32FU (TE85R)
IC1022	8-759-082-57	s	IC TC7W04FU
IC1023 *1	8-759-196-97	s	IC TC7SH32FU (TE85R)
IC1024	8-759-389-33	s	IC 74LCX244MTCX
IC1025	8-759-597-82	s	IC UPD4702G-E2
IC1026	8-759-277-63	s	IC TC7W14FU (TE12R)
IC1027	8-759-058-54	s	IC TC7S00FU-TE85R
IC1028 *2	8-759-196-97	s	IC TC7SH32FU (TE85R)
IC1101	8-759-996-82	s	IC MSM82C55A-2GS
IC1102	8-759-662-38	s	IC 74VHCT08AMTCX
IC1103	8-759-271-86	s	IC TC7SH04FU
IC1104	8-759-996-82	s	IC MSM82C55A-2GS
IC1105	8-759-285-08	s	IC CXD8344AQ
IC1106	8-759-009-02	s	IC MC14046BF
IC1107	8-759-058-58	s	IC TC7S04FU-TE85R
IC1108	8-759-996-82	s	IC MSM82C55A-2GS
IC1109	8-759-487-32	s	IC HD6417032VF12

(AT-122 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC1110	8-759-996-82	s	IC MSM82C55A-2GS
IC1111 *2	8-759-996-82	s	IC MSM82C55A-2GS
IC1112	8-759-491-48	s	IC TC74VHCT138AFT(EL)
IC1113	8-759-491-48	s	IC TC74VHCT138AFT(EL)
IC1114	8-759-906-53	s	IC TL062CPS
IC1117	8-759-441-99	s	IC MAX3232CSE-TE2
IC1118	8-759-472-18	s	IC 74VHC138MTCX
IC1121	8-759-472-18	s	IC 74VHC138MTCX
IC1122	8-759-472-39	s	IC 74VHC244MTCX
IC1124	8-759-472-39	s	IC 74VHC244MTCX
IC1125	8-759-471-89	s	IC 74VHC02MTCX
IC1128	8-759-472-35	s	IC 74VHC221AMTCX
IC1130	8-759-471-85	s	IC 74VHC00MTCX
IC1131	8-759-381-59	s	IC MC14020BFEL
IC1133	8-759-092-81	s	IC SN75158PS
IC1137	8-759-054-56	s	IC SN75179BPS
IC1139	8-759-054-56	s	IC SN75179BPS
IC1140	8-759-472-43	s	IC 74VHC245MTCX
IC1144	8-759-472-39	s	IC 74VHC244MTCX
IC1145	8-759-472-39	s	IC 74VHC244MTCX
IC1150	8-759-491-48	s	IC TC74VHCT138AFT(EL)
IC1153	8-759-594-17	o	IC CXD9093R
IC1154	8-759-429-23	s	IC TL16C550CPT
IC1156	8-759-441-99	s	IC MAX3232CSE-TE2
IC1157	8-759-472-24	s	IC 74VHC157MTCX
IC1158	8-759-472-14	s	IC 74VHC125MTCX
IC1159	8-759-471-91	s	IC 74VHC04MTCX
IC1160	8-759-271-86	s	IC TC7SH04FU
IC1161	8-759-471-96	s	IC 74VHC08MTCX
IC1162	8-759-471-96	s	IC 74VHC08MTCX
IC1163	8-759-471-96	s	IC 74VHC08MTCX
IC1164	8-759-058-56	s	IC TC7S02FU(TE85R)
IC1165	8-759-082-58	s	IC TC7W08FU
IC1166 *2	8-759-471-96	s	IC 74VHC08MTCX
IC1167 *2	8-759-491-48	s	IC TC74VHCT138AFT (EL)
IS1007	1-540-151-21	s	SOCKET, IC
IS1008	1-540-151-21	s	SOCKET, IC
L1	1-414-529-21	s	INDUCTOR (POWER)
L2	1-414-529-21	s	INDUCTOR (POWER)
L3	1-414-529-21	s	INDUCTOR (POWER)
L4	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L5	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L6	1-414-529-21	s	INDUCTOR (POWER)
L9	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L11	1-412-032-11	s	INDUCTOR CHIP 100UH (3225)
L12	1-412-032-11	s	INDUCTOR CHIP 100UH (3225)
L13	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L14	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L15	1-412-549-11	s	INDUCTOR,MICRO 1MH
L16	1-412-549-11	s	INDUCTOR,MICRO 1MH
L17	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L18	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L19	1-414-529-21	s	INDUCTOR (POWER)
L81	1-414-529-21	s	INDUCTOR (POWER)
L96	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L101	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L102	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L103	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)

(AT-122 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
L104	1-412-029-11	s	CHIP INDUCTOR 10UH (3225)
L105	1-412-029-11	s	CHIP INDUCTOR 10UH (3225)
L106	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L107	1-410-373-31	s	CHIP INDUCTOR 2.2UH (3225)
L108	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L109	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L110	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L111	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L112	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L113	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L114	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L115	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L203	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L204	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L205	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L206	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L209	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L210	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L402	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L403	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L404	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L405	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L406	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L407	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L408	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L409	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L410	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L411	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L701	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L702	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L703	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L704	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L705	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L706	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L717	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L761	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L762	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L791	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L792	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L851	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L881	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L882	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L886	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L1101	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L1102	1-412-029-11	s	CHIP INDUCTOR 10UH (3225)
L1103	1-412-029-11	s	CHIP INDUCTOR 10UH (3225)
L1104	1-412-029-11	s	CHIP INDUCTOR 10UH (3225)
L1105	1-412-029-11	s	CHIP INDUCTOR 10UH (3225)
L1106 *3	1-412-029-11	s	CHIP INDUCTOR 10UH (3225)
L1107	1-412-032-11	s	INDUCTOR CHIP 100UH (3225)
L1108	1-412-029-11	s	CHIP INDUCTOR 10UH (3225)
L1109	1-412-029-11	s	CHIP INDUCTOR 10UH (3225)
L1110	1-412-029-11	s	CHIP INDUCTOR 10UH (3225)
L1111	1-412-029-11	s	CHIP INDUCTOR 10UH (3225)
L1112	1-412-029-11	s	CHIP INDUCTOR 10UH (3225)
L1113	1-412-029-11	s	CHIP INDUCTOR 10UH (3225)
L1114	1-412-029-11	s	CHIP INDUCTOR 10UH (3225)
L1115	1-412-029-11	s	CHIP INDUCTOR 10UH (3225)
L1116	1-412-029-11	s	CHIP INDUCTOR 10UH (3225)

(AT-122 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
L1117	1-412-029-11	s	CHIP INDUCTOR 10UH (3225)
L1118	1-412-029-11	s	CHIP INDUCTOR 10UH (3225)
PH1	8-749-010-24	s	PHOTO COUPLER PS2604L
PH2	8-749-010-24	s	PHOTO COUPLER PS2604L
PH1101	8-749-014-35	s	IC HCPL-0630-500
Q1	8-729-101-07	s	TRANSISTOR 2SB798
Q2	8-729-101-07	s	TRANSISTOR 2SB798
Q3	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q4	8-729-101-07	s	TRANSISTOR 2SB798
Q6	8-729-807-51	s	TRANSISTOR 2SD1623-S
Q7	8-729-117-32	s	TRANSISTOR 2SC4177
Q8	8-729-117-32	s	TRANSISTOR 2SC4177
Q9	8-729-117-32	s	TRANSISTOR 2SC4177
Q10	8-729-807-51	s	TRANSISTOR 2SD1623-S
Q11	8-729-101-07	s	TRANSISTOR 2SB798
Q12	8-729-141-75	s	TRANSISTOR 2SD596DV345
Q13	8-729-141-75	s	TRANSISTOR 2SD596DV345
Q17	8-729-117-32	s	TRANSISTOR 2SC4177
Q19	8-729-117-32	s	TRANSISTOR 2SC4177
Q81	8-729-101-07	s	TRANSISTOR 2SB798
Q96	8-729-117-32	s	TRANSISTOR 2SC4177
Q101	8-729-143-13	s	TRANSISTOR 2SC4176-B34
Q102	8-729-143-13	s	TRANSISTOR 2SC4176-B34
Q103	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q104	8-729-143-13	s	TRANSISTOR 2SC4176-B34
Q105	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q402	8-729-117-32	s	TRANSISTOR 2SC4177
Q403	8-729-117-32	s	TRANSISTOR 2SC4177
Q404	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q405	8-729-117-32	s	TRANSISTOR 2SC4177
Q406	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q407	8-729-117-32	s	TRANSISTOR 2SC4177
Q409	8-729-117-32	s	TRANSISTOR 2SC4177
Q411	8-729-117-32	s	TRANSISTOR 2SC4177
Q414	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q415	8-729-117-32	s	TRANSISTOR 2SC4177
Q418	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q419	8-729-117-32	s	TRANSISTOR 2SC4177
Q702	8-729-117-32	s	TRANSISTOR 2SC4177
Q703	8-729-117-32	s	TRANSISTOR 2SC4177
Q704	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q705	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q860	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q861	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q1001	8-729-920-48	s	TRANSISTOR IMH2
Q1002	8-729-117-32	s	TRANSISTOR 2SC4177
Q1003	8-729-117-32	s	TRANSISTOR 2SC4177
R1	1-216-829-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R2	1-216-829-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R3	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R4	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R5	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R6	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R7	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R8	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R10	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R12	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)

(AT-122 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R13	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R14	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R15	1-218-718-11	s	RESISTOR CHIP 12K 1/16W (1608)
R16	1-218-730-11	s	RESISTOR METAL FILM CHIP 39K
R19	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R20	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R21	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R22	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R23	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R24	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R25	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R26	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R27	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R28	1-216-836-11	s	RESISTOR, CHIP 18K 1/16W 1608
R29	1-216-839-11	s	RESISTOR,CHIP 33K 1/16W 1608
R30	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R31	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R33	1-218-732-11	s	RESISTOR,CHIP 47K 1/16W(1608)
R34	1-218-732-11	s	RESISTOR,CHIP 47K 1/16W(1608)
R35	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R36	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R37	1-218-732-11	s	RESISTOR,CHIP 47K 1/16W(1608)
R38	1-216-839-11	s	RESISTOR,CHIP 33K 1/16W 1608
R39	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R40	1-216-837-11	s	RESISTOR,CHIP 22K 1/16W 1608
R41	1-218-740-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R42	1-218-740-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R43	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R44	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R45	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R46	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R47	1-216-842-11	s	RESISTOR,CHIP 56K 1/16W(1608)
R48	1-216-837-11	s	RESISTOR,CHIP 22K 1/16W 1608
R50	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R52	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R53	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R54	1-216-836-11	s	RESISTOR, CHIP 18K 1/16W 1608
R55	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R56	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R57	1-216-835-11	s	RESISTOR,CHIP 15K 1/16W
R58	1-214-792-00	s	RESISTOR,METAL FILM 1 1/2W
R59	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R60	1-216-839-11	s	RESISTOR,CHIP 33K 1/16W 1608
R61	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R62	1-216-829-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R63	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R64	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R65	1-216-839-11	s	RESISTOR,CHIP 33K 1/16W 1608
R66	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R67	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R68	1-216-835-11	s	RESISTOR,CHIP 15K 1/16W
R69	1-216-829-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R70	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R71	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R72	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R73	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R74	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R75	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R77	1-218-718-11	s	RESISTOR CHIP 12K 1/16W (1608)

(AT-122 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R78	1-218-730-11	s	RESISTOR METAL FILM CHIP 39K
R79	1-216-851-11	s	RESISTOR,CHIP 330K 1/16W 1608
R81	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R82	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R83	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R84	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R85	1-216-837-11	s	RESISTOR,CHIP 22K 1/16W 1608
R86	1-216-827-11	s	RESISTOR, CHIP 3.3K 1/16W 1608
R87	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R88	1-216-837-11	s	RESISTOR,CHIP 22K 1/16W 1608
R89	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R90	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R91	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R92	1-216-822-11	s	RESISTOR, CHIP 1.2K 1/16W 1608
R93	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R94	1-216-829-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R95	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R96	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R97	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R98	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R101	1-216-827-11	s	RESISTOR, CHIP 3.3K 1/16W 1608
R102	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R103	1-216-835-11	s	RESISTOR,CHIP 15K 1/16W
R104	1-218-679-91	s	RESISTOR,CHIP 300 1/16W
R106	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R107	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R109	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R110	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R111	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R112	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R114	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R117	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R118	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R119	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R120	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R121	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R122	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R123	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R124	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R125	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R126	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R127	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R128	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R129	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R130	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R131	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R132	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R133	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R134	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R135	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R136	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R137	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R138	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R139	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R140	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R141	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R142	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R143	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R144	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)

(AT-122 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R145	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R146	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R147	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R148	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R149	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R150	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R151	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R152	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R153	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R154	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R155	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R156	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R157	1-216-819-11	s	RESISTOR,CHIP 680 1/16W 1608
R158	1-216-819-11	s	RESISTOR,CHIP 680 1/16W 1608
R161	1-218-689-11	s	RESISTOR CHIP 750 1/16W (1608)
R162	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R163	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R166	1-218-684-11	s	RESISTOR,CHIP 470 1/16W (1608)
R167	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R168	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R169	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R170	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R171	1-218-706-11	s	RESISTOR,CHIP 3.9K 1/16W(1608)
R172	1-218-706-11	s	RESISTOR,CHIP 3.9K 1/16W(1608)
R173	1-218-706-11	s	RESISTOR,CHIP 3.9K 1/16W(1608)
R174	1-218-706-11	s	RESISTOR,CHIP 3.9K 1/16W(1608)
R175	1-218-656-11	s	RESISTOR,CHIP 33 1/16W (1608)
R176	1-216-793-11	s	RESISTOR,CHIP 4.7 1/16W 1608
R177	1-216-793-11	s	RESISTOR,CHIP 4.7 1/16W 1608
R178	1-218-285-11	s	RESISTOR,CHIP 75 1/16W (1608)
R179	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R180	1-218-713-11	s	RESISTOR,METAL 7.5K 1/16W
R181	1-218-713-11	s	RESISTOR,METAL 7.5K 1/16W
R182	1-218-719-11	s	RESISTOR,METAL 13K 1/16
R183	1-218-742-11	s	RESISTOR,METAL 120K 1/16
R184	1-218-719-11	s	RESISTOR,METAL 13K 1/16
R185	1-218-742-11	s	RESISTOR,METAL 120K 1/16
R186	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R187	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R188	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R189	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R190	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R191	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R192	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R193	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R194	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R195	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R196	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R197	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R198	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R199	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R210	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R212	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R213	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R214	1-218-718-11	s	RESISTOR CHIP 12K 1/16W (1608)
R215	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R216	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R217	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R218	*1 1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)

(AT-122 BOARD)

Ref. No. or Q'ty		Part No.	SP	Description
R219	*1	1-216-857-11	s	RESISTOR,CHIP 1M 1/16W(1608)
R220		1-218-718-11	s	RESISTOR CHIP 12K 1/16W (1608)
R226	*1	1-216-857-11	s	RESISTOR,CHIP 1M 1/16W(1608)
R227	*1	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R228		1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R229		1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R230		1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R231		1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R232		1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R233		1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R235		1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R236		1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R237		1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R238		1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R239		1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R240		1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R241		1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R242		1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R244		1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R245		1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R246		1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R247		1-218-740-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R248		1-218-717-11	s	RESISTOR,CHIP 11K 1/16W (1608)
R249		1-218-717-11	s	RESISTOR,CHIP 11K 1/16W (1608)
R250		1-218-740-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R251		1-218-740-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R252		1-218-717-11	s	RESISTOR,CHIP 11K 1/16W (1608)
R253		1-218-717-11	s	RESISTOR,CHIP 11K 1/16W (1608)
R254		1-218-740-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R255		1-218-715-11	s	RESISTOR,METAL 9.1K 1/16W
R256		1-218-715-11	s	RESISTOR,METAL 9.1K 1/16W
R257		1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R258		1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R261		1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R262		1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R264		1-218-715-11	s	RESISTOR,METAL 9.1K 1/16W
R266		1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R267		1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R268		1-218-715-11	s	RESISTOR,METAL 9.1K 1/16W
R269		1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R270		1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R271		1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R272		1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R275		1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R276		1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R277		1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R278		1-218-720-11	s	RESISTOR,CHIP 15K 1/16W(1608)
R279		1-218-720-11	s	RESISTOR,CHIP 15K 1/16W(1608)
R280		1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R281		1-218-720-11	s	RESISTOR,CHIP 15K 1/16W(1608)
R282		1-218-720-11	s	RESISTOR,CHIP 15K 1/16W(1608)
R283		1-218-720-11	s	RESISTOR,CHIP 15K 1/16W(1608)
R284		1-218-720-11	s	RESISTOR,CHIP 15K 1/16W(1608)
R285		1-218-720-11	s	RESISTOR,CHIP 15K 1/16W(1608)
R286		1-218-720-11	s	RESISTOR,CHIP 15K 1/16W(1608)
R287		1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R288		1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R289		1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R291		1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608

(AT-122 BOARD)

Ref. No. or Q'ty		Part No.	SP	Description
R292		1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R294		1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R295		1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R296		1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R297		1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R298		1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R299		1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R300		1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R401		1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R402		1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R403		1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R404		1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R405		1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R406		1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R407		1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R408		1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R410		1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R412		1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R413		1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R414		1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R415		1-218-740-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R416		1-218-740-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R417		1-218-740-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R418		1-218-740-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R419		1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R420	*1	1-216-857-11	s	RESISTOR,CHIP 1M 1/16W(1608)
R421	*1	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R422		1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R423	*1	1-216-857-11	s	RESISTOR,CHIP 1M 1/16W(1608)
R424	*1	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R425		1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R427		1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R433		1-218-720-11	s	RESISTOR,CHIP 15K 1/16W(1608)
R434		1-218-720-11	s	RESISTOR,CHIP 15K 1/16W(1608)
R437		1-218-720-11	s	RESISTOR,CHIP 15K 1/16W(1608)
R438		1-218-720-11	s	RESISTOR,CHIP 15K 1/16W(1608)
R439		1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R440		1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R441		1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R442		1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R443		1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R444		1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R445		1-218-720-11	s	RESISTOR,CHIP 15K 1/16W(1608)
R446		1-218-720-11	s	RESISTOR,CHIP 15K 1/16W(1608)
R447		1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R448		1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R449		1-218-720-11	s	RESISTOR,CHIP 15K 1/16W(1608)
R450		1-218-720-11	s	RESISTOR,CHIP 15K 1/16W(1608)
R451		1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R453		1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R455		1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R456		1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R457		1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R458		1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R459		1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R460		1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R461		1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R462		1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R463		1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)

(AT-122 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R464	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R465	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R466	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R467	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R468	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R469	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R470	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R471	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R472	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R473	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R474	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R475	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R476	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R477	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R478	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R479	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R480	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R481	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R482	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R483	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R484	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R485	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R486	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R487	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R488	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R489	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R490	1-216-837-11	s	RESISTOR,CHIP 22K 1/16W 1608
R491	1-216-837-11	s	RESISTOR,CHIP 22K 1/16W 1608
R492	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R493	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R494	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R495	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R496	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R497	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R498	1-216-829-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R499	1-218-722-11	s	RESISTOR, CHIP 18K 1/16W 1608
R500	1-216-829-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R501	1-216-829-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R502	1-218-722-11	s	RESISTOR, CHIP 18K 1/16W 1608
R503	1-216-829-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R504	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R505	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R506	1-218-740-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R507	1-218-740-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R508	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R509	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R510	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R511	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R512	1-218-733-11	s	RESISTOR,CHIP 51K 1/16W (1608)
R513	1-218-733-11	s	RESISTOR,CHIP 51K 1/16W (1608)
R514	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R517	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R518	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R519	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R520	1-218-733-11	s	RESISTOR,CHIP 51K 1/16W (1608)
R521	1-218-733-11	s	RESISTOR,CHIP 51K 1/16W (1608)
R522	1-216-839-11	s	RESISTOR,CHIP 33K 1/16W 1608
R523	1-216-839-11	s	RESISTOR,CHIP 33K 1/16W 1608
R524	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608

(AT-122 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R525	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R526	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R527	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R528	1-216-837-11	s	RESISTOR,CHIP 22K 1/16W 1608
R529	1-216-837-11	s	RESISTOR,CHIP 22K 1/16W 1608
R530	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R531	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R532	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R533	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R534	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R535	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R536	1-218-741-11	s	RESISTOR,CHIP 110K 1/16W(1608)
R537	1-218-741-11	s	RESISTOR,CHIP 110K 1/16W(1608)
R538	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R539	1-218-741-11	s	RESISTOR,CHIP 110K 1/16W(1608)
R540	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R541	1-218-741-11	s	RESISTOR,CHIP 110K 1/16W(1608)
R542	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R543	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R544	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R545	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R548	1-216-837-11	s	RESISTOR,CHIP 22K 1/16W 1608
R549	1-216-837-11	s	RESISTOR,CHIP 22K 1/16W 1608
R551	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R553	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R558	1-218-723-11	s	RESISTOR,CHIP 20K 1/16W(1608)
R559	1-218-723-11	s	RESISTOR,CHIP 20K 1/16W(1608)
R560	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R561	1-216-839-11	s	RESISTOR,CHIP 33K 1/16W 1608
R566	1-218-723-11	s	RESISTOR,CHIP 20K 1/16W(1608)
R567	1-218-723-11	s	RESISTOR,CHIP 20K 1/16W(1608)
R568	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R569	1-216-839-11	s	RESISTOR,CHIP 33K 1/16W 1608
R570	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R571	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R572	1-218-738-11	s	RESISTOR,CHIP 82K 1/16W(1608)
R573	1-218-738-11	s	RESISTOR,CHIP 82K 1/16W(1608)
R576	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R577	1-218-711-11	s	RESISTOR,METAL 6.2K 1/16W
R580	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R581	1-218-711-11	s	RESISTOR,METAL 6.2K 1/16W
R583	1-218-725-11	s	RESISTOR,CHIP 24K 1/16W(1608)
R584	1-218-725-11	s	RESISTOR,CHIP 24K 1/16W(1608)
R586	1-218-725-11	s	RESISTOR,CHIP 24K 1/16W(1608)
R587	1-218-725-11	s	RESISTOR,CHIP 24K 1/16W(1608)
R589	1-216-837-11	s	RESISTOR,CHIP 22K 1/16W 1608
R591	1-216-837-11	s	RESISTOR,CHIP 22K 1/16W 1608
R594	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R595	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R598	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R599	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R603	1-216-829-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R604	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R605	1-216-829-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R609	1-216-829-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R610	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R611	1-216-829-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R613	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R615	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)

(AT-122 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R618	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R621	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R622	1-218-666-11	s	RESISTOR,CHIP 82 1/16W (1608)
R624	1-218-666-11	s	RESISTOR,CHIP 82 1/16W (1608)
R628	1-218-651-11	s	RESISTOR,CHIP 20 1/16W (1608)
R629	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R632	1-218-651-11	s	RESISTOR,CHIP 20 1/16W (1608)
R633	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R635	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R637	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R646	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R647	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R648	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R651	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R652	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R653	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R656	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R657	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R702	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R703	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R704	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R705	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R706	1-218-741-11	s	RESISTOR,CHIP 110K 1/16W(1608)
R707	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R708 *1	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R708 *2	1-218-712-11	s	RESISTOR,CHIP 6.8K 1/16W
R709	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R711 *1	1-216-837-11	s	RESISTOR,CHIP 22K 1/16W 1608
R712	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R713 *1	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R713 *2	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W (1608)
R714 *1	1-216-849-11	s	RESISTOR,CHIP 220K 1/16W 1608
R716	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R717	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R718 *1	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R719	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R720	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R721	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R722	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R723	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R724	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R725	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R726	1-216-834-11	s	RESISTOR,CHIP 12K 1/16W 1608
R727	1-216-831-11	s	RESISTOR,CHIP 6.8K 1/16W(1608)
R728	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R729	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R730	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R731	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R732	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R733	1-216-837-11	s	RESISTOR,CHIP 22K 1/16W 1608
R734	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R735	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R736	1-218-732-11	s	RESISTOR,CHIP 47K 1/16W(1608)
R737	1-216-834-11	s	RESISTOR,CHIP 12K 1/16W 1608
R738	1-218-712-11	s	RESISTOR,METAL 6.8K 1/16W
R739	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R740	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R741	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R742	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)

(AT-122 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R743	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R744	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R745	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R746	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R747	1-216-837-11	s	RESISTOR,CHIP 22K 1/16W 1608
R748	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R749	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R750	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R751	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R752	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R753	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R754	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R755	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R756	1-216-837-11	s	RESISTOR,CHIP 22K 1/16W 1608
R757	1-216-837-11	s	RESISTOR,CHIP 22K 1/16W 1608
R758	1-216-837-11	s	RESISTOR,CHIP 22K 1/16W 1608
R759	1-216-837-11	s	RESISTOR,CHIP 22K 1/16W 1608
R760	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R761	1-218-722-11	s	RESISTOR, CHIP 18K 1/16W 1608
R762	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R763	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R764	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R765	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R766	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R767	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R768	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R769	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R770	1-216-837-11	s	RESISTOR,CHIP 22K 1/16W 1608
R771	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R772	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R773	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R774	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R775	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R776	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R777	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R778	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R779	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R780	1-218-712-11	s	RESISTOR,METAL 6.8K 1/16W
R781	1-218-712-11	s	RESISTOR,METAL 6.8K 1/16W
R782	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R783	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R784	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R785	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R786	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R787	1-218-712-11	s	RESISTOR,METAL 6.8K 1/16W
R788	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R789	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R790	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R791	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R792	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R793	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R794	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R795	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R796	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R797	1-216-837-11	s	RESISTOR,CHIP 22K 1/16W 1608
R798	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R799	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R800	1-216-837-11	s	RESISTOR,CHIP 22K 1/16W 1608
R802	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608

(AT-122 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R803	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R804	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R808	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R812	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R815	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R817	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R822 *1	1-216-827-11	s	RESISTOR, CHIP 3.3K 1/16W 1608
R822 *2	1-216-831-11	s	RESISTOR, CHIP 6.8K 1/16W (1608)
R823	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R824 *1	1-216-864-11	s	RESISTOR, CHIP 0 1/16W(1608)
R827	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R828	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R829	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R830	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R831	1-216-837-11	s	RESISTOR,CHIP 22K 1/16W 1608
R832	1-216-842-11	s	RESISTOR,CHIP 56K 1/16W(1608)
R833	1-216-837-11	s	RESISTOR,CHIP 22K 1/16W 1608
R834	1-216-842-11	s	RESISTOR,CHIP 56K 1/16W(1608)
R835	1-216-818-11	s	RESISTOR, CHIP 560 1/16W 1608
R836 *2	1-216-821-11	s	RESISTOR, CHIP 1.0K 1/16W (1608)
R837 *2	1-218-723-11	s	RESISTOR, CHIP 20K 1/16W (1608)
R838 *2	1-218-723-11	s	RESISTOR, CHIP 20K 1/16W (1608)
R839 *2	1-216-845-11	s	RESISTOR, CHIP 100K 1/16W (1608)
R852	1-216-851-11	s	RESISTOR,CHIP 330K 1/16W 1608
R855	1-216-851-11	s	RESISTOR,CHIP 330K 1/16W 1608
R856	1-216-851-11	s	RESISTOR,CHIP 330K 1/16W 1608
R857	1-216-847-11	s	RESISTOR, CHIP 150K 1/16W 1608
R860	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R861	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R862	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R863	1-216-829-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R864	1-218-730-11	s	RESISTOR METAL FILM CHIP 39K
R865	1-218-703-11	s	RESISTOR,CHIP 3.0K 1/16(1608)
R866	1-218-708-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R867	1-218-709-11	s	RESISTOR,CHIP 5.1K 1/16W
R868	1-218-708-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R869	1-218-714-11	s	RESISTOR,CHIP 8.2K 1/16W(1608)
R870	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R871	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R872	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R873	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R881	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R882	1-218-732-11	s	RESISTOR,CHIP 47K 1/16W(1608)
R884	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R885	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R886	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R887	1-218-722-11	s	RESISTOR,CHIP 18K 1/16W 1608
R888	1-218-722-11	s	RESISTOR,CHIP 18K 1/16W 1608
R889	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R890 *2	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R900	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R901	1-218-740-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R902	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R903	1-218-740-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R904	1-218-740-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R905	1-218-740-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R906	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R908	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R909	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)

(AT-122 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R911	1-218-644-11	s	RESISTOR,CHIP 10 1/16W
R912	1-218-740-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R1002	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1003	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R1004	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R1005	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R1006	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R1007	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R1008	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R1009	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R1010	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R1011	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R1013	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1014	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1015	1-216-834-11	s	RESISTOR,CHIP 12K 1/16W 1608
R1016	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R1017	1-216-829-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R1018	1-216-837-11	s	RESISTOR,CHIP 22K 1/16W 1608
R1019	1-216-837-11	s	RESISTOR,CHIP 22K 1/16W 1608
R1020	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R1021	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R1023	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1024	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1025	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1026	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R1027	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1028	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R1029	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R1030	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1031	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1032	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1033	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1034	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R1035	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R1036	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R1037	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R1038	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R1039	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R1040	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R1041	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1042	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R1043	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R1044	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R1101	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R1102	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R1103	1-216-829-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R1104	1-216-824-11	s	RESISTOR, CHIP 1.8K 1/16W 1608
R1105	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R1106	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R1107	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R1108	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R1109	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R1110	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R1111	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R1112	1-216-831-11	s	RESISTOR,CHIP 6.8K 1/16W(1608)
R1114	1-216-831-11	s	RESISTOR,CHIP 6.8K 1/16W(1608)
R1115	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R1116	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R1117	1-216-811-11	s	RESISTOR, CHIP 150 1/16W(1608)

(AT-122 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1118	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R1119	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R1120	1-216-837-11	s	RESISTOR,CHIP 22K 1/16W 1608
R1121	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R1122	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R1123	1-216-837-11	s	RESISTOR,CHIP 22K 1/16W 1608
R1124	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R1125	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R1126	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R1127	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R1128	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R1129	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R1130	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R1131	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R1132	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R1133	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R1134	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R1135	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R1136	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R1137	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R1138	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R1139	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1140	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1141	1-216-839-11	s	RESISTOR,CHIP 33K 1/16W 1608
R1142	1-216-843-11	s	RESISTOR,CHIP 68K 1/16W (1608)
R1143	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1144	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R1146	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R1151 *4	1-216-296-91	s	CONDUCTOR, CHIP (3216)
R1214	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R1215	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R1216	1-216-837-11	s	RESISTOR,CHIP 22K 1/16W 1608
R1217	1-216-837-11	s	RESISTOR,CHIP 22K 1/16W 1608
R1218	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R1219	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R1220	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R1223	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R1224	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R1225	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R1226	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R1227	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R1228	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R1229	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
RB101	1-236-904-11	s	RESISTOR NETWORK 1K (1608)
RB1002	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB1004	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB1005	1-239-308-11	s	RESISTOR ARRAY,CHIP 47K
RB1006	1-239-308-11	s	RESISTOR ARRAY,CHIP 47K
RB1010	1-239-309-11	s	RESISTOR ARRAY,CHIP 100K
RB1011	1-239-309-11	s	RESISTOR ARRAY,CHIP 100K
RB1012	1-239-309-11	s	RESISTOR ARRAY,CHIP 100K
RB1013	1-239-309-11	s	RESISTOR ARRAY,CHIP 100K
RB1014	1-239-309-11	s	RESISTOR ARRAY,CHIP 100K
RB1015	1-239-309-11	s	RESISTOR ARRAY,CHIP 100K
RB1016	1-239-309-11	s	RESISTOR ARRAY,CHIP 100K
RB1017	1-239-419-11	s	NETWORK RESISTOR 470 (1608)
RB1018	1-239-419-11	s	NETWORK RESISTOR 470 (1608)
RB1020	1-233-936-11	s	RESISTOR,NETWORK 10 (1608)

(AT-122 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB1021	1-239-389-11	s	RESISTOR,NETWORK 47K (1608)
RB1022	1-239-389-11	s	RESISTOR,NETWORK 47K (1608)
RB1023	1-239-416-11	s	NETWORK,RESISTOR 220 (1608)
RB1024	1-239-416-11	s	NETWORK,RESISTOR 220 (1608)
RB1025	1-236-904-11	s	RESISTOR NETWORK 1K (1608)
RB1026	1-236-904-11	s	RESISTOR NETWORK 1K (1608)
RB1027	1-236-904-11	s	RESISTOR NETWORK 1K (1608)
RB1028	1-236-904-11	s	RESISTOR NETWORK 1K (1608)
RB1029	1-239-389-11	s	RESISTOR,NETWORK 47K (1608)
RB1030	1-239-308-11	s	RESISTOR ARRAY,CHIP 47K
RB1031	1-239-308-11	s	RESISTOR ARRAY,CHIP 47K
RB1032	1-233-936-11	s	RESISTOR,NETWORK 10 (1608)
RB1101	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB1102	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB1103	1-236-907-11	s	RESISTOR BLOCK 100K (1608)
RB1104	1-236-907-11	s	RESISTOR BLOCK 100K (1608)
RB1105*2	1-239-419-11	s	NETWORK, RESISTOR 470 (1608)
RB1107	1-239-309-11	s	RESISTOR ARRAY,CHIP 100K
RB1108	1-239-419-11	s	NETWORK RESISTOR 470 (1608)
RB1109	1-239-419-11	s	NETWORK RESISTOR 470 (1608)
RB1110*2	1-239-309-11	s	RESISTOR ARRAY, CHIP 100K
RB1111*2	1-239-309-11	s	RESISTOR ARRAY, CHIP 100K
RB1112*2	1-239-309-11	s	RESISTOR ARRAY, CHIP 100K
RB1113	1-236-904-11	s	RESISTOR NETWORK 1K (1608)
RB1114	1-236-904-11	s	RESISTOR NETWORK 1K (1608)
RB1115	1-236-904-11	s	RESISTOR NETWORK 1K (1608)
RB1116	1-236-904-11	s	RESISTOR NETWORK 1K (1608)
RB1117*2	1-236-907-11	s	RESISTOR BLOCK 100K (1608)
RB1119	1-236-907-11	s	RESISTOR BLOCK 100K (1608)
RB1120	1-236-907-11	s	RESISTOR BLOCK 100K (1608)
RB1121	1-236-904-11	s	RESISTOR NETWORK 1K (1608)
RB1122	1-236-904-11	s	RESISTOR NETWORK 1K (1608)
RB1123	1-236-907-11	s	RESISTOR BLOCK 100K (1608)
RB1124	1-236-904-11	s	RESISTOR NETWORK 1K (1608)
RB1125	1-236-904-11	s	RESISTOR NETWORK 1K (1608)
RB1126	1-236-904-11	s	RESISTOR NETWORK 1K (1608)
RB1127	1-239-310-11	s	RESISTOR ARRAY, CHIP 220K
RB1128	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB1129	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB1130	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB1131	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB1132	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB1133	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RV101	1-237-032-11	s	RESISTOR,ADJ,CERMET 500
RV102	1-237-032-11	s	RESISTOR,ADJ,CERMET 500
RV103	1-237-037-11	s	RESISTOR,ADJ,CERMET 20K
RV104	1-237-037-11	s	RESISTOR,ADJ,CERMET 20K
RV404	1-241-264-11	s	RESISTOR ADJ 10K (CERMET)
RV406	1-241-264-11	s	RESISTOR ADJ 10K (CERMET)
RV701	1-241-264-11	s	RESISTOR ADJ 10K (CERMET)
RV702	1-241-264-11	s	RESISTOR ADJ 10K (CERMET)
RV703	1-237-039-11	s	RESISTOR,ADJ,CERMET 100K
RV704	1-237-037-11	s	RESISTOR,ADJ,CERMET 20K
S1	1-570-711-11	s	SWITCH,SLIDE
S2	1-570-711-11	s	SWITCH,SLIDE
S4	1-570-711-11	s	SWITCH,SLIDE
S7	1-570-711-11	s	SWITCH,SLIDE
S101	1-570-711-11	s	SWITCH,SLIDE

(AT-122 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
S102	1-570-711-11	s	SWITCH,SLIDE
S201	1-570-711-11	s	SWITCH,SLIDE
S202	1-570-711-11	s	SWITCH,SLIDE
S401	1-570-711-11	s	SWITCH,SLIDE
S402	1-570-711-11	s	SWITCH,SLIDE
S403	1-570-711-11	s	SWITCH,SLIDE
S404	1-570-711-11	s	SWITCH,SLIDE
S701	1-570-711-11	s	SWITCH,SLIDE
S702	1-570-611-11	s	SWITCH,TOGGLE
S703	1-570-711-11	s	SWITCH,SLIDE
S1001	1-692-271-31	s	SWITCH, SLIDE
S1002	1-692-271-31	s	SWITCH, SLIDE
S1003	1-692-271-31	s	SWITCH, SLIDE
S1004	1-570-610-11	s	SWITCH,TOGGLE
S1006	1-572-222-11	s	SWITCH,TOGGLE
S1007	1-570-711-11	s	SWITCH,SLIDE
S1008	1-570-711-11	s	SWITCH,SLIDE
S1009	1-570-711-11	s	SWITCH,SLIDE
S1010	1-762-117-11	s	SWITCH, ROTARY
S1011	1-762-117-11	s	SWITCH, ROTARY
T1	1-426-994-21	s	TRANSFORMER, DC-DC CONVERTER
THP1 ⚠	1-810-792-11	s	THERMISTOR, POSITIVE
THP2 ⚠	1-810-792-11	s	THERMISTOR, POSITIVE
THP3 ⚠	1-810-792-11	s	THERMISTOR, POSITIVE
THP4 ⚠	1-810-792-11	s	THERMISTOR, POSITIVE
THP5 ⚠	1-762-254-21	s	SWITCH, POLY
THP6 ⚠	1-762-254-21	s	SWITCH, POLY
THP7 ⚠	1-762-254-21	s	SWITCH, POLY
X101	1-760-274-11	s	OSCILLATOR, CRYSTAL (VCO TYPE)
X1102	1-760-437-11	s	OSCILLATOR, CRYSTAL (VCO TYPE)

CN-1617 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8325-796-A	o	MOUNTED CIRCUIT BOARD, CN-1617
C1	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C2	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C7	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C8	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C9	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C10	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
CN5	1-573-727-11	s	CONNECTOR, FPC 25P
CN6	1-580-568-11	o	PIN, CONNECTOR (PC BOARD) 26P
CN7	1-580-569-11	o	PIN, CONNECTOR (PC BOARD) 28P
CN8	1-691-781-11	o	CONNECTOR,FPC 10P
CN9	1-766-289-11	s	CONNECTOR, FPC 16P
CN10	1-766-289-11	s	CONNECTOR, FPC 16P
CN11	1-580-559-11	o	PIN, CONNECTOR (PC BOARD) 8P
CN12	1-506-483-11	o	PIN, CONNECTOR 4P
CN13	1-580-558-11	o	PIN, CONNECTOR (PC BOARD) 6P
CN14	1-564-505-11	o	PLUG,CONNECTOR (2P)
CN15	1-564-505-11	o	PLUG,CONNECTOR (2P)
CN22	1-580-557-11	o	PIN, CONNECTOR (PC BOARD) 4P
FL2	1-239-897-12	s	FILTER, EMI (SMD)
FL4	1-239-897-12	s	FILTER, EMI (SMD)
FL16	1-233-316-21	s	FILTER,CHIP EMI
FL17	1-233-316-21	s	FILTER,CHIP EMI
FL18	1-233-316-21	s	FILTER,CHIP EMI
FL19	1-233-316-21	s	FILTER,CHIP EMI
FL20	1-233-316-21	s	FILTER,CHIP EMI
FL21	1-233-316-21	s	FILTER,CHIP EMI
FL22	1-233-316-21	s	FILTER,CHIP EMI
FL23	1-233-316-21	s	FILTER,CHIP EMI
FL24	1-233-316-21	s	FILTER,CHIP EMI
FL25	1-233-316-21	s	FILTER,CHIP EMI
FL26	1-233-316-21	s	FILTER,CHIP EMI
FL27	1-233-316-21	s	FILTER,CHIP EMI
FL28	1-233-316-21	s	FILTER,CHIP EMI
FL29	1-233-316-21	s	FILTER,CHIP EMI
FL30	1-233-316-21	s	FILTER,CHIP EMI
FL31	1-233-316-21	s	FILTER,CHIP EMI
FL32	1-233-316-21	s	FILTER,CHIP EMI
FL33	1-233-316-21	s	FILTER,CHIP EMI
FL34	1-233-316-21	s	FILTER,CHIP EMI
FL35	1-233-316-21	s	FILTER,CHIP EMI
R1	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R2	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R3	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R4	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R5	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R6	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R7	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R8	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R9	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R10	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R11	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)

CN-1618 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	1-676-623-11	o	PRINTED WIRING BOARD, CN-1618
CN1	1-580-533-11	o	PIN, CONNECTOR (PC BOARD) 8P
CN2	1-766-696-11	o	CONNECTOR, ROUND TYPE 8P

CN-1619 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	1-676-905-11	o	PRINTED WIRING BOARD, CN-1619
C1	1-163-275-11	s	CAPACITOR CERAMIC 1000PF/50V
C2	1-163-275-11	s	CAPACITOR CERAMIC 1000PF/50V
C3	1-163-275-11	s	CAPACITOR CERAMIC 1000PF/50V
CN1	1-778-341-11	s	CONNECTOR, XLR (RECEPTACLE) 3P

CN-1635 BOARD
---

*1 : Serial No. 10001 through 10010 (CCU-900 UC)
Serial No. 40001 through 40007 (CCU-900P)
*2 : Serial No. 10011 and higher (CCU-900 UC)
Serial No. 30001 and higher (CCU-900 J)
Serial No. 40008 and higher (CCU-900P)

Ref. No. or Q'ty	Part No.	SP	Description
1pc	1-676-624-11	o	PRINTED WIRING BOARD, CN-1635
1pc	3-627-813-02	o	PLATE NUT,D-SUB 9P
CN1	1-766-289-11	s	CONNECTOR, FPC 16P
CN2 *1	1-563-890-21	s	SOCKET,D-SUB CONNECTOR (9P)
CN2 *2	1-778-058-21	s	SOCKET,D-SUB CONNECTOR 9P
CN3 *1	1-563-890-21	s	SOCKET,D-SUB CONNECTOR (9P)
CN3 *2	1-778-058-21	s	SOCKET,D-SUB CONNECTOR 9P

CN-1636 BOARD
---

*1 : Serial No. 10001 through 10010 (CCU-900 UC)
Serial No. 40001 through 40007 (CCU-900P)
*2 : Serial No. 10011 and higher (CCU-900 UC)
Serial No. 30001 and higher (CCU-900 J)
Serial No. 40008 and higher (CCU-900P)

Ref. No. or Q'ty	Part No.	SP	Description
1pc	1-676-622-11	o	PRINTED WIRING BOARD, CN-1636
1pc	3-627-800-01	o	PLATE NUT,D-SUB 15P
CN1	1-573-727-11	s	CONNECTOR, FPC 25P
CN2	1-766-289-11	s	CONNECTOR, FPC 16P
CN3 *1	1-563-826-21	s	SOCKET,D-SUB CONNECTOR (15P)
CN3 *2	1-794-205-11	s	SOCKET,D-SUB CONNECTOR 15P
CN4 *1	1-563-826-21	s	SOCKET,D-SUB CONNECTOR (15P)
CN4 *2	1-794-205-11	s	SOCKET,D-SUB CONNECTOR 15P

CN-1637 BOARD
---

*1 : Serial No. 10001 through 10010 (CCU-900 UC)
Serial No. 40001 through 40007 (CCU-900P)
*2 : Serial No. 10011 and higher (CCU-900 UC)
Serial No. 30001 and higher (CCU-900 J)
Serial No. 40008 and higher (CCU-900P)

Ref. No. or Q'ty	Part No.	SP	Description
1pc	1-676-620-11	o	PRINTED WIRING BOARD, CN-1637
1pc	3-627-813-02	o	PLATE NUT,D-SUB 9P
CN1	1-691-781-11	o	CONNECTOR,FPC 10P
CN2 *1	1-563-890-21	s	SOCKET,D-SUB CONNECTOR (9P)
CN2 *2	1-778-058-21	s	SOCKET,D-SUB CONNECTOR 9P
CN3 *1	1-563-890-21	s	SOCKET,D-SUB CONNECTOR (9P)
CN2 *2	1-778-058-21	s	SOCKET,D-SUB CONNECTOR 9P

CN-1638 BOARD
---

*1 : Serial No. 10001 through 10010 (CCU-900 UC)
Serial No. 40001 through 40007 (CCU-900P)
*2 : Serial No. 10011 and higher (CCU-900 UC)
Serial No. 30001 and higher (CCU-900 J)
Serial No. 40008 and higher (CCU-900P)

Ref. No. or Q'ty	Part No.	SP	Description
1pc	1-676-621-11	o	PRINTED WIRING BOARD, CN-1638
CN1	1-580-542-11	o	PIN, CONNECTOR (PC BOARD) 26P
CN2	1-580-543-11	o	PIN, CONNECTOR (PC BOARD) 28P
CN3 *1	1-563-891-21	s	SOCKET,D-SUB CONNECTOR (25P)
CN3 *2	1-778-059-11	s	SOCKET,D-SUB CONNECTOR 25P
CN4 *1	1-563-891-21	s	SOCKET,D-SUB CONNECTOR (25P)
CN4 *2	1-778-059-11	s	SOCKET,D-SUB CONNECTOR 25P

CN-1925 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8325-784-A	o	MOUNTED CIRCUIT BOARD, CN-1925
2pcs	7-621-759-40	s	SCREW +PSW 2.6X6(EP-FE/ZNBK/CM
CN2	1-778-005-21	o	CONNECTOR, BOARD TO BOARD 20P
CN3	1-778-005-21	o	CONNECTOR, BOARD TO BOARD 20P

DPR-69 BOARD
---

*1: Serial No. 10001 through 10010 (CCU-900 UC)
    Serial No. 40001 through 40007 (CCU-900P)
*2: Serial No. 10011 and higher (CCU-900 UC)
    Serial No. 30001 and higher (CCU-900 J)
    Serial No. 40008 and higher (CCU-900P)
*3: Serial No. 10001 through 10021 (CCU-900 UC)
    Serial No. 30001 through 30003 (CCU-900 J)
    Serial No. 40001 through 40044 (CCU-900P)
*4: Serial No. 10022 and higher (CCU-900 UC)
    Serial No. 30004 and higher (CCU-900 J)
    Serial No. 40045 and higher (CCU-900P)

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8325-788-A	o	MOUNTED CIRCUIT BOARD, DPR-69
1pc	3-627-838-02	o	PC BOARD PANEL DPR-69
1pc	3-681-020-01	o	PC SHIELD PLATE
2pcs	3-681-042-01	o	LEVER, PC BOARD(1)
2pcs	3-681-045-01	o	LEVER, PC BOARD(2)
4pcs	7-621-759-40	s	SCREW +PSW 2.6X6(EP-FE/ZNBK/CM
4pcs	7-626-320-11	s	SPRING PIN,3X8 (STEEL)
5pcs	7-682-947-01	s	SCREW +PSW 3X6
C1	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C2	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C3	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C4	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C5	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C6	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C7	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C8	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C9	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C10	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C11	1-135-212-21	s	CAPACITOR TANTALUM 2.2MF/35V
C12	1-135-212-21	s	CAPACITOR TANTALUM 2.2MF/35V
C13	1-135-212-21	s	CAPACITOR TANTALUM 2.2MF/35V
C14	1-135-212-21	s	CAPACITOR TANTALUM 2.2MF/35V
C15	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C17	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C18	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C19	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C20	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C21	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C22	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C23	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C24	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C25	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C26	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C27	1-135-212-21	s	CAPACITOR TANTALUM 2.2MF/35V
C28	1-107-689-21	s	CAPACITOR,TANTALUM 1MF/35V
C29	1-107-689-21	s	CAPACITOR,TANTALUM 1MF/35V
C30	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C31	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C32	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C33	1-135-212-21	s	CAPACITOR TANTALUM 2.2MF/35V
C34	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C35	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C36	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C37	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C38	1-107-689-21	s	CAPACITOR,TANTALUM 1MF/35V
C39	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C40	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C42	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH

(DPR-69 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C44	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C45	1-107-877-11	s	CAPACITOR, ELECT 1000MF/10V
C46	1-107-877-11	s	CAPACITOR, ELECT 1000MF/10V
C47	1-107-877-11	s	CAPACITOR, ELECT 1000MF/10V
C48	1-107-877-11	s	CAPACITOR, ELECT 1000MF/10V
C49	1-107-877-11	s	CAPACITOR, ELECT 1000MF/10V
C50	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C51	1-107-884-11	s	CAPACITOR,ELECT 1000MF/16V
C56	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C57	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C58	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C59	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C60	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C61 *2	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C101	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C102	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C103	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C104	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C105	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C106	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C107	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C109	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C110	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C111	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C112	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C113 *2	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C202	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C203	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C204	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C205	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C206	1-162-958-11	s	CAPACITOR,CERAMIC 270PF/50V SL
C208	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C209	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C210	1-135-145-11	s	CAPACITOR TANTALUM 0.47MF/35V
C211	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C212	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C213	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C214	1-162-921-11	s	CAPACITOR,CERAMIC 33PF/50V CH
C215	1-162-915-11	s	CAPACITOR,CERAMIC 10PF/50V CH
C216	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C220	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C222	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C224	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C226	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C228	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C231	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C250	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C251	1-115-416-11	s	CAPACITOR,CERAMIC 1000PF/25V
C252	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C253	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C254	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C255	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C256	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C257	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C258	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C259	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C260	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C261	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C265 *2	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C266 *2	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F

(DPR-69 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C301	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C302	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C303	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C304	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C305	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C306	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C307	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C308	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C309	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C310	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C311	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C312	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C313	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C314	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C315	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C316	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C317	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C318	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C319	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C320	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C321	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C322	1-135-071-21	s	CAPACITOR,TANTALUM 0.15MF/35V
C323	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C324	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C326	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C327	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C328 *2	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C329 *2	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C330	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C331	1-113-682-11	s	CAPACITOR,TANTALUM 33MF/10V
C332	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C333	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C334	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C335	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C336	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C337	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C338	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C339	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C340	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C341	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C342	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C343	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C344	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C345	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C346	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C347	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C348	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C349	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C350	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C351	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C352	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C353	1-162-917-11	s	CAPACITOR,CERAMIC 15PF/50V CH
C354	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C355	1-107-877-11	s	CAPACITOR, ELECT 1000MF/10V
C356	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C357	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C358	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C359	1-115-416-11	s	CAPACITOR,CERAMIC 1000PF/25V
C360	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C361	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F

(DPR-69 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C362	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C363	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C364	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C365	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C366	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C367	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C368	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C369	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C370	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C380	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C381	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C401	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C402	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C403	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C404	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C405	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C406	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C407	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C408	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C409	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C410	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C411	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C412	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C413	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C414	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C415	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C416	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C417	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C418	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C419	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C423	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C424	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C425	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C426	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C427	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C428	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C429	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C430	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C431	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C432	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C433	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C434	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C435	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C436	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C437	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C438	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C439 *2	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C440 *2	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C501	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C502	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C503	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C504	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C505	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C506	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C507	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C508	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C509	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C510	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C511	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C512	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F

(DPR-69 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C513	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C514	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C515	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C516	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C517	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C518	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C519	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C520	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C521	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C522	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C523	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C524	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C525	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C526 *2	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C527 *2	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C601	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C602	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C603	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C604	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C605	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C606	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C607	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C608	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C609	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C610	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C612	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C614	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C615	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C616	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C617	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C618	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C619	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C620	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C621	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C622	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C623	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C624	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C625	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C626	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C627	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C628	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C629	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C630	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C631	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C632	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C633	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C634	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C635	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C636	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C637	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C638	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C639	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C640	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C641	1-113-985-11	s	CAPACITOR,TANTALUM 10MF/20V
C642	1-113-985-11	s	CAPACITOR,TANTALUM 10MF/20V
C643	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C644	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C645	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C646	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C647	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F

(DPR-69 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C648	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C655	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C656	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C657	1-126-391-11	s	CAPACITOR ELECT 47MF/6.3V(105)
C658	1-126-391-11	s	CAPACITOR ELECT 47MF/6.3V(105)
C659	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C660	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C661	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C662	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C663	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C664	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C665	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C666	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C667	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C668	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C669	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C701	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C702	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C704	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C705	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C706	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C707	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C708	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C709	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C710	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C711	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C712	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C713	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C714	1-164-218-11	s	CAPACITOR,CERAMIC 180PF/50V CH
C715	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C716	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C717	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C718	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C720	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C721	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C722	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C723	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C724	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C725	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C726	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C727	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C728	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C729	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C730	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C731	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C732	1-113-985-11	s	CAPACITOR,TANTALUM 10MF/20V
C733	1-113-985-11	s	CAPACITOR,TANTALUM 10MF/20V
C734	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C735	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C736	1-162-909-11	s	CAPACITOR,CERAMIC 4PF/50V CH
C737	1-162-921-11	s	CAPACITOR,CERAMIC 33PF/50V CH
C738	1-113-642-11	s	CAPACITOR, TANTALUM 47MF/10V
C739	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C740	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C741	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C742	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C745	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C750	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C751	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C752	1-126-391-11	s	CAPACITOR ELECT 47MF/6.3V(105)

(DPR-69 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C753	1-126-391-11	s	CAPACITOR ELECT 47MF/6.3V(105)
C754	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C755	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C756	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C757	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C758	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C759	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C760	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C761	1-126-391-11	s	CAPACITOR ELECT 47MF/6.3V(105)
C762	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C763	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C764	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C765	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C766	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C767	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C768	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C769 *2	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C801	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C802	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C803	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C804	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C805	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C806	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C807	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C808	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C809	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C810	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C811	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C812	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C813	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C814	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C815	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C816	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C817	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C818	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C819	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C820	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C821	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C822	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C823	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C824	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C825	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C826	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C827	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C828	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C829	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C847	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C848	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C850	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C851	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C852 *2	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C901	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C902	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C903	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C904	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C905	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C906	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C907	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C908	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F

(DPR-69 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C909	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C910	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C911	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C912	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C913	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C914	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C915	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C916	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C917 *1	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C918	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C919	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C920	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C921	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C922	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C923	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C924	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C925	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C926	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C927	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C928	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C929	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C930	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C931	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C932	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C933	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C934	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C935	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C936	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C937	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C938	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C939	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C940	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C941	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C942	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C967	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C968	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C969	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C970	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C1002	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C1003	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1004	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1005	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1006	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1007	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1008	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C1009	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1010	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1011	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1012	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1013	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1014	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C1015	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1016	1-110-563-11	s	CAPACITOR CERAMIC 0.068MF/16V
C1021	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1022	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1023	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1024	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1025	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1026	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)

(DPR-69 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1027	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C1028	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1029	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1030	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1031	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1032	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1033	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1034	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1035	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C1036	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C1037	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1038	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1039	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1040	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1041	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1042	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1043	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1044	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C1049	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1050	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C1054	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C1055	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1056	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1057	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C1058	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1059	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C1060	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1061	1-113-985-11	s	CAPACITOR,TANTALUM 10MF/20V
C1062	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C1066	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C1069	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1070	1-104-913-11	s	CAPACITOR,TANTALUM 10MF/16V
C1071	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1072	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1073	1-104-913-11	s	CAPACITOR,TANTALUM 10MF/16V
C1079	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1080	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1081	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1082	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1083	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1084	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1085	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1086	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1087	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1088	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C1090	1-162-915-11	s	CAPACITOR,CERAMIC 10PF/50V CH
C1091	1-135-259-11	s	CAPACITOR,TANTALUM 10MF/6.3V
C1092	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1094	1-107-877-11	s	CAPACITOR, ELECT 1000MF/10V
C1095	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1096	1-126-168-11	s	CAPACITOR,ELECT 1000MF/6.3V
C1097	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1098	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1099	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1101	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1102	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1103	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1104	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1105	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F

(DPR-69 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1106	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1107	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1108	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C1109	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1110	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1111	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1112	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1113	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1114	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1115	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1116	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1117	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1118	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1119	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1120	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1121	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C1122	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1123	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1124	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1125	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1126	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1127	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1128	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1180	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1181	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C1202	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1203	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1204	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1205	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C1206	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1207	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C1208	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1209	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1210	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1211	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1212	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1213	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1214	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1215	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1216	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1217	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1218	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1219	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1220	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C1221	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C1222	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1223	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1224	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1225	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1226	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1227	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1228	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1229	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1230	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1231	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1232	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1233	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1234	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1235	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F

(DPR-69 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1236	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1237	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1238	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1239	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C1240	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1241	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C1242	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1243	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1401	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1402	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C1403	1-164-315-11	s	CAPACITOR,CERAMIC 470PF/50V CH
C1404	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1405	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1406	1-162-958-11	s	CAPACITOR,CERAMIC 270PF/50V SL
C1407	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C1408	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1409	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C1410	1-115-156-11	s	CAPACITOR,CERAMIC 1MF/10V(1608
C1411	1-115-156-11	s	CAPACITOR,CERAMIC 1MF/10V(1608
C1412	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1413	1-115-156-11	s	CAPACITOR,CERAMIC 1MF/10V(1608
C1414	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1415	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1420	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1421	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1422	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1423	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1424	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1425	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1431	1-115-416-11	s	CAPACITOR,CERAMIC 1000PF/25V
C1432	1-115-416-11	s	CAPACITOR,CERAMIC 1000PF/25V
C1433	1-115-416-11	s	CAPACITOR,CERAMIC 1000PF/25V
C1434	1-115-416-11	s	CAPACITOR,CERAMIC 1000PF/25V
C1435	1-115-416-11	s	CAPACITOR,CERAMIC 1000PF/25V
C1437	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1438	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1439	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1442	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1443	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1444	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1445	1-115-156-11	s	CAPACITOR,CERAMIC 1MF/10V(1608
C1447	1-162-915-11	s	CAPACITOR,CERAMIC 10PF/50V CH
C1448	1-162-925-11	s	CAPACITOR,CERAMIC 68PF/50V CH
C1449	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1450	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1451	1-115-156-11	s	CAPACITOR,CERAMIC 1MF/10V(1608
C1452	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1453	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1454	1-115-156-11	s	CAPACITOR,CERAMIC 1MF/10V(1608
C1455	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1456	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1457	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1458	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1459	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C1460	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1461	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1462	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1463	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1502	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F

(DPR-69 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1503	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1504	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1505	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1506	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C1507	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1508	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1509	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1510	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1511	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1512	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1513	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1514	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1515	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1516	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1517	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1518	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1519	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1520	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1521	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1522	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1523	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1524	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1525	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1526	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1527 *1	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1528	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1529	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1530	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1531	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1532	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1533	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1534	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1535	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1536	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1537	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C1538 *2	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
CN6 *1	1-750-933-21	o	PIN, CONNECTOR (PC BOARD) 12P
CN6 *2	1-695-889-21	o	PIN, CONNECTOR (PC BOARD) 10P
D1	8-719-063-83	s	LED SML-510MWT86
D2	8-719-063-83	s	LED SML-510MWT86
D3	8-719-063-83	s	LED SML-510MWT86
D4	8-719-063-83	s	LED SML-510MWT86
D5	8-719-063-83	s	LED SML-510MWT86
D6	8-719-063-83	s	LED SML-510MWT86
D11	8-719-157-23	s	DIODE RD4.7M-B
D14	8-719-106-53	s	DIODE RD10M-B2
D15	8-719-106-53	s	DIODE RD10M-B2
D16	8-719-948-48	s	DIODE HSM88AS-TL (TL)
D17	8-719-063-83	s	LED SML-510MWT86
D18	8-719-063-83	s	LED SML-510MWT86
D19	8-719-063-83	s	LED SML-510MWT86
D20	8-719-157-23	s	DIODE RD4.7M-B
D21	8-719-157-23	s	DIODE RD4.7M-B
D22	8-719-157-23	s	DIODE RD4.7M-B
D23	8-719-157-23	s	DIODE RD4.7M-B
D24	8-719-157-23	s	DIODE RD4.7M-B
D201	8-719-024-81	s	DIODE 1SS300-TE85L
D301	8-719-058-14	s	LED CL-220PG-C-TS

(DPR-69 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
D302	8-719-800-76	s	DIODE 1SS226
D303	8-719-058-14	s	LED CL-220PG-C-TS
D701 *2	8-719-024-81	s	DIODE 1SS300-TE85L
D1001	8-719-800-76	s	DIODE 1SS226
D1104	8-719-058-14	s	LED CL-220PG-C-TS
D1105	8-719-058-94	s	LED CL-220Y
D1106	8-719-052-72	s	LED CL-220HR-C
D1107	8-719-058-14	s	LED CL-220PG-C-TS
D1108	8-719-058-94	s	LED CL-220Y
D1109	8-719-052-72	s	LED CL-220HR-C
D1110	8-719-058-14	s	LED CL-220PG-C-TS
D1111	8-719-058-14	s	LED CL-220PG-C-TS
D1112	8-719-058-14	s	LED CL-220PG-C-TS
D1113	8-719-058-14	s	LED CL-220PG-C-TS
D1114	8-719-058-14	s	LED CL-220PG-C-TS
D1402	8-719-024-81	s	DIODE 1SS300-TE85L
FB402	1-469-094-11	s	FERRITE, EMI (SMD)
FB501	1-469-094-11	s	FERRITE, EMI (SMD)
FB902	1-469-094-11	s	FERRITE, EMI (SMD)
FB903	1-469-094-11	s	FERRITE, EMI (SMD)
FB904	1-469-094-11	s	FERRITE, EMI (SMD)
FB905	1-469-094-11	s	FERRITE, EMI (SMD)
FB1011	1-469-094-11	s	FERRITE, EMI (SMD)
FB1015	1-469-094-11	s	FERRITE, EMI (SMD)
FB1016	1-469-094-11	s	FERRITE, EMI (SMD)
FB1101	1-469-094-11	s	FERRITE, EMI (SMD)
FB1103	1-469-094-11	s	FERRITE, EMI (SMD)
FB1200	1-469-094-11	s	FERRITE, EMI (SMD)
FB1202	1-469-094-11	s	FERRITE, EMI (SMD)
FB1203	1-469-094-11	s	FERRITE, EMI (SMD)
FB1401	1-469-094-11	s	FERRITE, EMI (SMD)
FB1403	1-469-094-11	s	FERRITE, EMI (SMD)
FB1404	1-469-094-11	s	FERRITE, EMI (SMD)
IC1	8-759-669-45	s	IC TL062CPWR-12
IC2	8-759-669-45	s	IC TL062CPWR-12
IC3	8-759-669-45	s	IC TL062CPWR-12
IC4	8-759-669-45	s	IC TL062CPWR-12
IC5	8-759-669-45	s	IC TL062CPWR-12
IC6	8-759-973-71	s	IC TL7705CPS-B
IC7	1-809-861-11	s	IC NJM78L08UA
IC8 *3	8-759-562-40	s	IC CAT24WC02J-TE13
IC8 *4	8-759-678-06	s	IC CAT24WC02JI-TE13
IC9 *2	8-759-472-02	s	IC 74VHC32MTCX
IC10	8-759-471-91	s	IC 74VHC04MTCX
IC12	8-759-274-66	s	IC LM4040BIM3-5.0
IC101	8-759-472-43	s	IC 74VHC245MTCX
IC102	8-759-472-43	s	IC 74VHC245MTCX
IC103	8-759-472-14	s	IC 74VHC125MTCX
IC104	8-759-662-38	s	IC 74VHCT08AMTCX
IC105	8-759-472-43	s	IC 74VHC245MTCX
IC107	8-759-386-27	s	IC 74LCX04MTCX
IC108	8-759-196-97	s	IC TC7SH32FU (TE85R)
IC109 *2	8-759-196-96	s	IC TC7SH08FU (TE85R)
IC201	8-759-487-35	s	IC GS4882-CTA
IC208	8-759-637-57	s	IC CLC450AJM5
IC210	8-759-196-96	s	IC TC7SH08FU (TE85R)
IC250	8-759-549-22	s	IC SN74LV574APWR
IC252 *2	8-759-465-03	s	IC PC8574AT (T)

(DPR-69 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC253 *2	8-759-271-86	s	IC TC7SH04FU
IC301	8-759-472-59	s	IC 74VHC541MTCX
IC302	8-759-472-59	s	IC 74VHC541MTCX
IC307	8-759-662-38	s	IC 74VHCT08AMTCX
IC308	8-759-662-37	s	IC 74VHCT00AMTCX
IC311	8-759-009-02	s	IC MC14046BF
IC314	8-759-669-66	s	IC TLC272CPWR
IC315	8-759-082-61	s	IC TC4W53FU
IC316	8-759-445-73	s	IC M66256FP (E2)
IC317	8-759-445-73	s	IC M66256FP (E2)
IC318	8-759-445-73	s	IC M66256FP (E2)
IC321	8-759-472-43	s	IC 74VHC245MTCX
IC322	8-759-271-86	s	IC TC7SH04FU
IC323	8-759-472-59	s	IC 74VHC541MTCX
IC324	8-759-472-59	s	IC 74VHC541MTCX
IC325	8-759-472-59	s	IC 74VHC541MTCX
IC326	8-759-472-59	s	IC 74VHC541MTCX
IC327	8-759-472-14	s	IC 74VHC125MTCX
IC328	8-759-471-91	s	IC 74VHC04MTCX
IC329	8-752-386-51	s	IC CXD3122R
IC330	8-759-472-65	s	IC 74VHC574MTCX
IC331	8-759-472-43	s	IC 74VHC245MTCX
IC332	8-759-472-43	s	IC 74VHC245MTCX
IC333	8-759-472-12	s	IC 74VHC123AMTCX
IC334	8-759-472-04	s	IC 74VHC74MTCX
IC335	8-759-575-64	s	IC NC7SZ04P5
IC336	8-759-471-91	s	IC 74VHC04MTCX
IC337	8-759-456-26	s	IC 74LCX541MTCX
IC338	8-759-456-26	s	IC 74LCX541MTCX
IC339	8-759-456-26	s	IC 74LCX541MTCX
IC340	8-759-456-26	s	IC 74LCX541MTCX
IC342	8-759-472-04	s	IC 74VHC74MTCX
IC343	8-759-271-86	s	IC TC7SH04FU
IC344	8-759-271-86	s	IC TC7SH04FU
IC345	8-759-196-96	s	IC TC7SH08FU (TE85R)
IC346 *2	8-759-471-96	s	IC 74VHC08MTCX
IC347 *2	8-759-472-65	s	IC 74VHC574MTCX
IC348 *1	8-759-902-88	s	IC SN74LS123NS
IC401	8-752-386-51	s	IC CXD3122R
IC402	8-759-472-65	s	IC 74VHC574MTCX
IC403	8-759-472-65	s	IC 74VHC574MTCX
IC404	8-759-472-65	s	IC 74VHC574MTCX
IC405	8-759-472-04	s	IC 74VHC74MTCX
IC406	8-759-472-65	s	IC 74VHC574MTCX
IC407	8-759-472-65	s	IC 74VHC574MTCX
IC408	8-759-271-86	s	IC TC7SH04FU
IC409	8-759-058-58	s	IC TC7S04FU-TE85R
IC411	8-759-471-91	s	IC 74VHC04MTCX
IC412	8-759-472-59	s	IC 74VHC541MTCX
IC413	8-759-472-59	s	IC 74VHC541MTCX
IC414	8-759-471-91	s	IC 74VHC04MTCX
IC415	8-759-472-14	s	IC 74VHC125MTCX
IC416	8-759-472-14	s	IC 74VHC125MTCX
IC417	8-759-472-14	s	IC 74VHC125MTCX
IC418	8-759-472-14	s	IC 74VHC125MTCX
IC419	8-759-344-84	s	IC CXD8953Q
IC420 *2	8-759-683-83	s	IC 74VHCT541AMTCX
IC421 *2	8-759-683-83	s	IC 74VHCT541AMTCX
IC501	8-759-344-84	s	IC CXD8953Q

(DPR-69 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC502	8-759-472-65	s	IC 74VHC574MTCX
IC504	8-759-472-59	s	IC 74VHC541MTCX
IC505	8-759-472-59	s	IC 74VHC541MTCX
IC506	8-759-472-65	s	IC 74VHC574MTCX
IC507	8-759-472-65	s	IC 74VHC574MTCX
IC508	8-759-472-65	s	IC 74VHC574MTCX
IC509	8-759-472-65	s	IC 74VHC574MTCX
IC511	8-759-058-58	s	IC TC7S04FU-TE85R
IC512	8-759-271-86	s	IC TC7SH04FU
IC513 *2	8-759-683-83	s	IC 74VHCT541AMTCX
IC514 *2	8-759-683-83	s	IC 74VHCT541AMTCX
IC601	8-759-471-91	s	IC 74VHC04MTCX
IC602	8-759-472-65	s	IC 74VHC574MTCX
IC603	8-759-472-65	s	IC 74VHC574MTCX
IC604	8-759-472-65	s	IC 74VHC574MTCX
IC605	8-759-472-65	s	IC 74VHC574MTCX
IC606	8-759-472-65	s	IC 74VHC574MTCX
IC607	8-759-478-24	s	IC CXD8966R
IC608	8-759-470-51	s	IC MB88141APFV-ER
IC610	8-759-663-15	s	IC 74VHCT244AMTCX
IC612	8-752-375-98	s	IC CXD2315Q
IC613	8-759-471-96	s	IC 74VHC08MTCX
IC614	8-752-375-98	s	IC CXD2315Q
IC617	8-759-745-64	s	IC NJM4560M
IC618	8-759-472-73	s	IC 74VHC4052MX
IC619	8-759-637-57	s	IC CLC450AJM5
IC620	8-759-637-57	s	IC CLC450AJM5
IC701	8-759-478-24	s	IC CXD8966R
IC703	8-759-470-51	s	IC MB88141APFV-ER
IC704	8-752-375-98	s	IC CXD2315Q
IC705	8-752-375-98	s	IC CXD2315Q
IC706	8-759-662-35	s	IC 74VHCT04MTCX
IC707	8-759-662-38	s	IC 74VHCT08AMTCX
IC708	8-759-472-73	s	IC 74VHC4052MX
IC709	8-759-637-57	s	IC CLC450AJM5
IC710	8-759-637-57	s	IC CLC450AJM5
IC711	8-759-637-57	s	IC CLC450AJM5
IC712	8-759-637-57	s	IC CLC450AJM5
IC713 *2	8-759-082-57	s	IC TC7W04FU
IC801	8-759-472-14	s	IC 74VHC125MTCX
IC803	8-752-386-51	s	IC CXD3122R
IC812	8-759-472-04	s	IC 74VHC74MTCX
IC813	8-759-271-86	s	IC TC7SH04FU
IC818	8-759-196-97	s	IC TC7SH32FU (TE85R)
IC819 *2	8-759-196-96	s	IC TC7SH08FU (TE85R)
IC902	8-759-652-59	s	IC EPFQC240AA
IC905	8-752-386-51	s	IC CXD3122R
IC906	8-752-386-51	s	IC CXD3122R
IC909	8-759-386-26	s	IC 74LCX574MTCX
IC911	8-759-386-26	s	IC 74LCX574MTCX
IC912	8-759-386-26	s	IC 74LCX574MTCX
IC913	8-759-386-26	s	IC 74LCX574MTCX
IC914	8-759-386-26	s	IC 74LCX574MTCX
IC915	8-759-386-26	s	IC 74LCX574MTCX
IC917	8-759-472-65	s	IC 74VHC574MTCX
IC918	8-759-472-65	s	IC 74VHC574MTCX
IC933 *1	8-759-472-04	s	IC 74VHC74MTCX
IC934 *1	8-759-472-14	s	IC 74VHC125MTCX
IC935	8-759-471-91	s	IC 74VHC04MTCX

(DPR-69 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC936	8-759-271-86	s	IC TC7SH04FU
IC1001	8-759-386-26	s	IC 74LCX574MTCX
IC1002	8-759-472-65	s	IC 74VHC574MTCX
IC1003	8-759-386-26	s	IC 74LCX574MTCX
IC1004	8-759-386-26	s	IC 74LCX574MTCX
IC1005	8-759-662-38	s	IC 74VHCT08AMTCX
IC1006	8-759-669-66	s	IC TLC272CPWR
IC1007	8-759-386-26	s	IC 74LCX574MTCX
IC1008	8-759-271-86	s	IC TC7SH04FU
IC1009	8-759-456-26	s	IC 74LCX541MTCX
IC1010	8-759-069-36	s	IC MC74HC4046AF
IC1011	8-759-389-31	s	IC 74LCX125MTCX
IC1013	8-759-471-91	s	IC 74VHC04MTCX
IC1014	8-759-472-65	s	IC 74VHC574MTCX
IC1015	8-759-599-93	s	IC NC7SZO8P5
IC1016	8-759-472-29	s	IC 74VHC161MTCX
IC1017	8-759-472-29	s	IC 74VHC161MTCX
IC1022	8-752-375-98	s	IC CXD2315Q
IC1026	8-759-637-57	s	IC CLC450AJM5
IC1037	8-759-386-26	s	IC 74LCX574MTCX
IC1038	8-759-386-26	s	IC 74LCX574MTCX
IC1040	8-759-058-58	s	IC TC7S04FU-TE85R
IC1076	8-759-472-04	s	IC 74VHC74MTCX
IC1077	8-759-599-93	s	IC NC7SZO8P5
IC1078	8-759-271-86	s	IC TC7SH04FU
IC1080	8-759-196-96	s	IC TC7SH08FU (TE85R)
IC1081	8-759-599-93	s	IC NC7SZO8P5
IC1082	8-759-662-36	s	IC 74VHCT574AMTCX
IC1083	8-759-662-36	s	IC 74VHCT574AMTCX
IC1101	8-759-344-84	s	IC CXD8953Q
IC1102	8-759-472-59	s	IC 74VHC541MTCX
IC1103	8-759-472-59	s	IC 74VHC541MTCX
IC1104	8-759-683-83	s	IC 74VHCT541AMTCX
IC1105	8-759-683-83	s	IC 74VHCT541AMTCX
IC1106	8-759-344-84	s	IC CXD8953Q
IC1107	8-759-472-59	s	IC 74VHC541MTCX
IC1108	8-759-472-59	s	IC 74VHC541MTCX
IC1109	8-759-472-59	s	IC 74VHC541MTCX
IC1110	8-759-471-91	s	IC 74VHC04MTCX
IC1111	8-759-472-59	s	IC 74VHC541MTCX
IC1112	8-759-683-83	s	IC 74VHCT541AMTCX
IC1113	8-759-683-83	s	IC 74VHCT541AMTCX
IC1125	8-759-471-91	s	IC 74VHC04MTCX
IC1201	8-759-652-59	s	IC EPFQC240AA
IC1202	8-759-595-53	s	IC MB81F643242B-10
IC1203	8-759-599-93	s	IC NC7SZO8P5
IC1204	8-759-599-93	s	IC NC7SZO8P5
IC1401	8-759-472-35	s	IC 74VHC221AMTCX
IC1402	8-759-661-01	o	IC S2044B-10
IC1404	8-759-661-02	o	IC S2045B-10
IC1405	8-759-472-35	s	IC 74VHC221AMTCX
IC1406	8-759-472-04	s	IC 74VHC74MTCX
IC1407	8-759-472-04	s	IC 74VHC74MTCX
IC1408	8-759-082-55	s	IC TC7W00FU
IC1409	8-759-599-93	s	IC NC7SZO8P5
IC1410	8-759-242-78	s	IC TC7W02F
IC1411	8-759-082-58	s	IC TC7W08FU
IC1412	8-759-472-04	s	IC 74VHC74MTCX
IC1413	8-759-196-96	s	IC TC7SH08FU (TE85R)

(DPR-69 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC1414	8-759-557-84	s	IC NC7SZ04P5X
IC1415	8-759-557-84	s	IC NC7SZ04P5X
IC1501	8-759-472-43	s	IC 74VHC245MTCX
IC1502	8-759-472-43	s	IC 74VHC245MTCX
IC1503	8-759-472-43	s	IC 74VHC245MTCX
IC1504	8-759-182-95	s	IC HD151015T
IC1505	8-759-472-18	s	IC 74VHC138MTCX
IC1506	8-759-472-18	s	IC 74VHC138MTCX
IC1507	8-759-996-82	s	IC MSM82C55A-2GS
IC1508	8-759-996-82	s	IC MSM82C55A-2GS
IC1509	8-759-472-59	s	IC 74VHC541MTCX
IC1510	8-759-472-59	s	IC 74VHC541MTCX
IC1511	8-759-996-82	s	IC MSM82C55A-2GS
IC1512	8-759-996-82	s	IC MSM82C55A-2GS
IC1513	8-759-996-82	s	IC MSM82C55A-2GS
IC1514	8-759-683-83	s	IC 74VHCT541AMTCX
IC1515	8-759-683-83	s	IC 74VHCT541AMTCX
IC1516	8-759-683-83	s	IC 74VHCT541AMTCX
IC1517	8-759-683-83	s	IC 74VHCT541AMTCX
IC1519	8-759-683-83	s	IC 74VHCT541AMTCX
IC1520	8-759-058-58	s	IC TC7S04FU-TE85R
IC1521	8-759-271-86	s	IC TC7SH04FU
IC1522	8-759-394-05	s	IC TC7SH08F-TE85R
IC1523	8-759-289-69	s	IC CXD8280AQ
IC1524	8-759-683-83	s	IC 74VHCT541AMTCX
IC1525	8-759-519-12	s	IC CXD8281Q
IC1526	8-759-472-61	s	IC 74VHC573MTCX
IC1527	8-759-472-61	s	IC 74VHC573MTCX
IC1529	8-759-471-96	s	IC 74VHC08MTCX
IC1530	8-759-683-83	s	IC 74VHCT541AMTCX
IC1531 *2	8-759-472-12	s	IC 74VHC123AMTCX
IS901	1-251-093-11	s	SOCKET,IC
L1	1-414-529-21	s	INDUCTOR (POWER)
L2	1-414-529-21	s	INDUCTOR (POWER)
L3	1-414-529-21	s	INDUCTOR (POWER)
L4	1-412-032-11	s	INDUCTOR CHIP 100UH (3225)
L5	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L6	1-414-529-21	s	INDUCTOR (POWER)
L7	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L8	1-414-529-21	s	INDUCTOR (POWER)
L9	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L10	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L11	1-412-032-11	s	INDUCTOR CHIP 100UH (3225)
L12	1-412-032-11	s	INDUCTOR CHIP 100UH (3225)
L13	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L15	1-414-529-21	s	INDUCTOR (POWER)
L101	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L102	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L201	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L202	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L203	1-410-385-11	s	INDUCTOR,CHIP 22UH (3225)
L250	1-412-026-11	s	INDUCTOR,CHIP 1UH (3225)
L251	1-412-026-11	s	INDUCTOR,CHIP 1UH (3225)
L301	1-412-026-11	s	INDUCTOR,CHIP 1UH (3225)
L302	1-412-026-11	s	INDUCTOR,CHIP 1UH (3225)
L303	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L304	1-412-026-11	s	INDUCTOR,CHIP 1UH (3225)

(DPR-69 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
L305	1-412-028-11	s	INDUCTOR,CHIP 4.7UH (3225)
L306	1-412-026-11	s	INDUCTOR,CHIP 1UH (3225)
L307	1-412-026-11	s	INDUCTOR,CHIP 1UH (3225)
L308	1-412-026-11	s	INDUCTOR,CHIP 1UH (3225)
L309	1-412-028-11	s	INDUCTOR,CHIP 4.7UH (3225)
L310	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L311	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L312	1-412-026-11	s	INDUCTOR,CHIP 1UH (3225)
L313	1-412-026-11	s	INDUCTOR,CHIP 1UH (3225)
L314	1-412-026-11	s	INDUCTOR,CHIP 1UH (3225)
L315	1-412-026-11	s	INDUCTOR,CHIP 1UH (3225)
L316	1-412-026-11	s	INDUCTOR,CHIP 1UH (3225)
L317 *1	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L401	1-412-026-11	s	INDUCTOR,CHIP 1UH (3225)
L402	1-412-026-11	s	INDUCTOR,CHIP 1UH (3225)
L502	1-412-026-11	s	INDUCTOR,CHIP 1UH (3225)
L601	1-412-026-11	s	INDUCTOR,CHIP 1UH (3225)
L603	1-412-026-11	s	INDUCTOR,CHIP 1UH (3225)
L604	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L605	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L610	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L611	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L612	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L613	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L617	1-412-026-11	s	INDUCTOR,CHIP 1UH (3225)
L618	1-412-026-11	s	INDUCTOR,CHIP 1UH (3225)
L701	1-412-026-11	s	INDUCTOR,CHIP 1UH (3225)
L702	1-412-026-11	s	INDUCTOR,CHIP 1UH (3225)
L705	1-412-026-11	s	INDUCTOR,CHIP 1UH (3225)
L706	1-412-026-11	s	INDUCTOR,CHIP 1UH (3225)
L707	1-410-656-11	s	INDUCTOR,CHIP 150UH (3225)
L708	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L709	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L710	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L711	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L712	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L713	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L801	1-412-026-11	s	INDUCTOR,CHIP 1UH (3225)
L808	1-412-026-11	s	INDUCTOR,CHIP 1UH (3225)
L905	1-412-026-11	s	INDUCTOR,CHIP 1UH (3225)
L906	1-412-026-11	s	INDUCTOR,CHIP 1UH (3225)
L1001	1-412-026-11	s	INDUCTOR,CHIP 1UH (3225)
L1002	1-412-026-11	s	INDUCTOR,CHIP 1UH (3225)
L1003	1-412-026-11	s	INDUCTOR,CHIP 1UH (3225)
L1004	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L1005	1-412-026-11	s	INDUCTOR,CHIP 1UH (3225)
L1006	1-412-028-11	s	INDUCTOR,CHIP 4.7UH (3225)
L1007	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L1008	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L1104	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L1401	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L1402	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L1403	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L1404	1-412-026-11	s	INDUCTOR,CHIP 1UH (3225)
L1406	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L1407	1-412-026-11	s	INDUCTOR,CHIP 1UH (3225)
L1506	1-412-026-11	s	INDUCTOR,CHIP 1UH (3225)
L1507	1-412-026-11	s	INDUCTOR,CHIP 1UH (3225)
L1509	1-412-026-11	s	INDUCTOR,CHIP 1UH (3225)

(DPR-69 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
L1510	1-412-026-11	s	INDUCTOR,CHIP 1UH (3225)
L1511	1-412-026-11	s	INDUCTOR,CHIP 1UH (3225)
L1512	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L1513	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
Q1	8-729-113-13	s	TRANSISTOR FA1A4M-L33
Q2	8-729-113-13	s	TRANSISTOR FA1A4M-L33
Q4	8-729-113-13	s	TRANSISTOR FA1A4M-L33
Q5	8-729-113-13	s	TRANSISTOR FA1A4M-L33
Q6	8-729-807-51	s	TRANSISTOR 2SD1623-S
Q9	8-729-113-13	s	TRANSISTOR FA1A4M-L33
Q10	8-729-807-51	s	TRANSISTOR 2SD1623-S
Q11	8-729-101-07	s	TRANSISTOR 2SB798
Q12	8-729-117-32	s	TRANSISTOR 2SC4177
Q13	8-729-117-32	s	TRANSISTOR 2SC4177
Q205	8-729-117-32	s	TRANSISTOR 2SC4177
Q206	8-729-029-14	s	TRANSISTOR DTC144EUA-T106
Q209	8-729-117-72	s	TRANSISTOR 2SC4178
Q211	8-729-117-72	s	TRANSISTOR 2SC4178
Q213	8-729-403-29	s	TRANSISTOR XN6435
Q216	8-729-117-32	s	TRANSISTOR 2SC4177
Q301	8-729-117-32	s	TRANSISTOR 2SC4177
Q302	8-729-117-32	s	TRANSISTOR 2SC4177
Q601	8-729-117-32	s	TRANSISTOR 2SC4177
Q602	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q603	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q701	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q702	8-729-117-32	s	TRANSISTOR 2SC4177
Q703	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q704	8-729-117-32	s	TRANSISTOR 2SC4177
Q706 *2	8-729-029-14	s	TRANSISTOR DTC144EUA-T106
Q1101	8-729-117-32	s	TRANSISTOR 2SC4177
Q1102	8-729-117-32	s	TRANSISTOR 2SC4177
Q1103	8-729-117-32	s	TRANSISTOR 2SC4177
Q1104	8-729-117-32	s	TRANSISTOR 2SC4177
Q1105	8-729-117-32	s	TRANSISTOR 2SC4177
Q1106	8-729-117-32	s	TRANSISTOR 2SC4177
Q1107	8-729-117-32	s	TRANSISTOR 2SC4177
Q1108	8-729-117-32	s	TRANSISTOR 2SC4177
Q1109	8-729-117-32	s	TRANSISTOR 2SC4177
Q1110	8-729-117-32	s	TRANSISTOR 2SC4177
Q1111	8-729-117-32	s	TRANSISTOR 2SC4177
R1	1-216-830-11	s	RESISTOR,CHIP 5.6K 1/16W 1608
R2	1-216-830-11	s	RESISTOR,CHIP 5.6K 1/16W 1608
R3	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R4	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R5	1-216-823-11	s	RESISTOR, CHIP 1.5K 1/16W
R6	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R7	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R8	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R9	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R10	1-218-717-11	s	RESISTOR,CHIP 11K 1/16W (1608)
R11	1-218-717-11	s	RESISTOR,CHIP 11K 1/16W (1608)
R12	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R13	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R14	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R15	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R17	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R19	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)

(DPR-69 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R20	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R21	1-216-830-11	s	RESISTOR,CHIP 5.6K 1/16W 1608
R22	1-218-728-11	s	RESISTOR,CHIP 33K 1/16W
R23	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R24	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R25 *2	1-218-668-11	s	RESISTOR,CHIP 100 1/16W 1608
R26	1-218-732-11	s	RESISTOR,CHIP 47K 1/16W(1608)
R27	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R31	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R32	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R33	1-218-732-11	s	RESISTOR,CHIP 47K 1/16W(1608)
R34	1-218-732-11	s	RESISTOR,CHIP 47K 1/16W(1608)
R35	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R36	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R37	1-218-732-11	s	RESISTOR,CHIP 47K 1/16W(1608)
R38	1-218-728-11	s	RESISTOR,CHIP 33K 1/16W
R39	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R41	1-218-740-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R42	1-218-740-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R43	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R44	1-216-829-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R45	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R46	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R47	1-216-842-11	s	RESISTOR,CHIP 56K 1/16W(1608)
R48	1-216-837-11	s	RESISTOR,CHIP 22K 1/16W 1608
R49	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R50	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R52	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R54	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R55 *2	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R56	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R57	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R58	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R59	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R61	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R62	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R63	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R65	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R66	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R69	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R71	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R72	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R74	1-216-813-11	s	RESISTOR, CHIP 220 1/16W 1608
R76	1-216-813-11	s	RESISTOR, CHIP 220 1/16W 1608
R77	1-216-813-11	s	RESISTOR, CHIP 220 1/16W 1608
R79	1-216-813-11	s	RESISTOR, CHIP 220 1/16W 1608
R81	1-216-813-11	s	RESISTOR, CHIP 220 1/16W 1608
R83	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R84	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R85	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R86	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R87	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R88	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R89	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R90	1-216-815-11	s	RESISTOR,CHIP 330 1/16W 1608
R91	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R92	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R102	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R103	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)

(DPR-69 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R104	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R105	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R106	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R107	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R108	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R109	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R110	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R111	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R112	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R113	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R114	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R116	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R117	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R120	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R121	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R122	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R123	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R124	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R125	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R126	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R127	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R128	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R129	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R130	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R131	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R132	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R134 *2	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R135 *2	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R201	1-218-665-11	s	RESISTOR,CHIP 75 1/16W (1608)
R202	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R203	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R204	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R205	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R214	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R215	1-218-747-11	s	RESISTOR,METAL 200K 1/16(1608)
R216	1-218-726-11	s	RESISTOR CHIP 27K 1/16W (1608)
R217	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R218	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R219	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R220	1-218-706-11	s	RESISTOR,CHIP 3.9K 1/16W(1608)
R221	1-218-707-11	s	RESISTOR,CHIP 4.3K 1/16W(1608)
R222	1-218-706-11	s	RESISTOR,CHIP 3.9K 1/16W(1608)
R223	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R228	1-218-736-11	s	RESISTOR,CHIP 68K 1/16W(1608)
R229	1-218-734-11	s	RESISTOR,CHIP 56K 1/16W(1608)
R231	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R235	1-218-704-11	s	RESISTOR,CHIP 3.3K 1/16W(1608)
R236	1-218-740-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R238	1-218-690-11	s	RESISTOR,CHIP 820 1/16W (1608)
R239	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R240	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R242	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R243	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R246	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R247	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R249	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R251	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R252	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R253	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608

(DPR-69 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R254	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R255	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R257	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R258	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R259	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R271	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R272	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R273	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R274	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R277 *2	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R278 *2	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R279 *2	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R280 *2	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R281 *2	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R282 *2	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R283 *2	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R284 *2	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R285 *2	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R286 *2	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R288 *2	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R301	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R302	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R303	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R305	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R306	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R307	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R308	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R309	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R310	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R311	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R316	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R317	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R318	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R319	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R320	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R321	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R322	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R323	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R324	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R325	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R326	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R328	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R329	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R330	1-218-732-11	s	RESISTOR,CHIP 47K 1/16W(1608)
R331	1-218-732-11	s	RESISTOR,CHIP 47K 1/16W(1608)
R333	1-218-726-11	s	RESISTOR CHIP 27K 1/16W (1608)
R334	1-218-726-11	s	RESISTOR CHIP 27K 1/16W (1608)
R335	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R336	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R337	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R338	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R339	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R340	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R341	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R343	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R345	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R346	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R347	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R348	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608

(DPR-69 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R349	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R350	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R351	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R352 *2	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R354	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R355	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R356	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R357	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R361	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R363	1-218-708-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R364	1-218-720-11	s	RESISTOR,CHIP 15K 1/16W(1608)
R365	1-218-720-11	s	RESISTOR,CHIP 15K 1/16W(1608)
R368	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R370	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R371	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R372	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R373	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R374	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R375	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R377	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R379	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R380	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R382	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R383	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R384	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R385	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R386	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R387	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R388	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R389	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R390	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R391	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R392	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R394	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R395	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R396	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R397	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R398 *2	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R399 *2	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R405	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R406	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R407	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R410	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R413	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R414	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R415	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R416	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R417	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R418	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R419	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R421	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R422	1-216-659-11	s	RESISTOR,CHIP 2.2K 1/10W(2012)
R431	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R432	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R434	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R435	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R436	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R437	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R438	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608

(DPR-69 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R439	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R440	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R441	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R442	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R443	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R444	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R445	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R446	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R501	1-216-659-11	s	RESISTOR,CHIP 2.2K 1/10W(2012)
R502	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R503	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R504	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R505	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R506	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R507	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R508	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R509	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R510	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R511	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R512	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R513	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R514	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R601	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R603	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R604	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R605	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R606	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R609	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R611	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R612	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R613	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R614	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R615	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R616	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R621	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R622	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R623	1-218-723-11	s	RESISTOR,CHIP 20K 1/16W(1608)
R624	1-218-718-11	s	RESISTOR CHIP 12K 1/16W (1608)
R625	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R626	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R627	1-216-839-11	s	RESISTOR,CHIP 33K 1/16W 1608
R628	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R629	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R630	1-216-826-11	s	RESISTOR,CHIP 2.7K 1/16W(1608)
R631	1-216-826-11	s	RESISTOR,CHIP 2.7K 1/16W(1608)
R632	1-216-837-11	s	RESISTOR,CHIP 22K 1/16W 1608
R633	1-218-707-11	s	RESISTOR,CHIP 4.3K 1/16W(1608)
R634	1-218-707-11	s	RESISTOR,CHIP 4.3K 1/16W(1608)
R635	1-218-712-11	s	RESISTOR,METAL 6.8K 1/16W
R636	1-218-680-11	s	RESISTOR,CHIP 330 1/16W(1608)
R637	1-218-696-11	s	RESISTOR,CHIP 1.5K 1/16W(1608)
R638	1-218-680-11	s	RESISTOR,CHIP 330 1/16W(1608)
R639	1-218-696-11	s	RESISTOR,CHIP 1.5K 1/16W(1608)
R640	1-218-712-11	s	RESISTOR,METAL 6.8K 1/16W
R641	1-218-707-11	s	RESISTOR,CHIP 4.3K 1/16W(1608)
R642	1-218-707-11	s	RESISTOR,CHIP 4.3K 1/16W(1608)
R644	1-218-722-11	s	RESISTOR, CHIP 18K 1/16W 1608
R645	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R646	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)

(DPR-69 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R647	1-218-666-11	s	RESISTOR,CHIP 82 1/16W (1608)
R648	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R649	1-218-666-11	s	RESISTOR,CHIP 82 1/16W (1608)
R650	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R651	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R652	1-218-696-11	s	RESISTOR,CHIP 1.5K 1/16W(1608)
R653	1-218-696-11	s	RESISTOR,CHIP 1.5K 1/16W(1608)
R654	1-218-678-11	s	RESISTOR CHIP 270 1/16W (1608)
R655	1-218-694-11	s	RESISTOR,CHIP 1.2K1/16W(1608)
R656	1-218-678-11	s	RESISTOR CHIP 270 1/16W (1608)
R657	1-218-694-11	s	RESISTOR,CHIP 1.2K1/16W(1608)
R662	1-218-688-11	s	RESISTOR,CHIP 680 1/16W(1608)
R663	1-218-688-11	s	RESISTOR,CHIP 680 1/16W(1608)
R664	1-218-680-11	s	RESISTOR,CHIP 330 1/16W(1608)
R665	1-218-680-11	s	RESISTOR,CHIP 330 1/16W(1608)
R666	1-218-720-11	s	RESISTOR,CHIP 15K 1/16W(1608)
R667	1-218-710-11	s	RESISTOR,CHIP 5.6K 1/16W(1608)
R701	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R702	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R704	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R705	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R706	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R707	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R708	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R709	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R710	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R711	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R712	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R713	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R714	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R715	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R716	1-216-826-11	s	RESISTOR,CHIP 2.7K 1/16W(1608)
R717	1-216-826-11	s	RESISTOR,CHIP 2.7K 1/16W(1608)
R718	1-218-707-11	s	RESISTOR,CHIP 4.3K 1/16W(1608)
R719	1-218-707-11	s	RESISTOR,CHIP 4.3K 1/16W(1608)
R720	1-218-706-11	s	RESISTOR,CHIP 3.9K 1/16W(1608)
R721	1-218-680-11	s	RESISTOR,CHIP 330 1/16W(1608)
R722	1-218-696-11	s	RESISTOR,CHIP 1.5K 1/16W(1608)
R723	1-218-680-11	s	RESISTOR,CHIP 330 1/16W(1608)
R724	1-218-696-11	s	RESISTOR,CHIP 1.5K 1/16W(1608)
R725	1-218-706-11	s	RESISTOR,CHIP 3.9K 1/16W(1608)
R726	1-218-707-11	s	RESISTOR,CHIP 4.3K 1/16W(1608)
R727	1-218-707-11	s	RESISTOR,CHIP 4.3K 1/16W(1608)
R728	1-218-698-11	s	RESISTOR,CHIP 1.8K 1/16W(1608)
R729	1-218-694-11	s	RESISTOR,CHIP 1.2K1/16W(1608)
R730	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R733	1-216-829-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R734	1-216-813-11	s	RESISTOR, CHIP 220 1/16W 1608
R735	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R736	1-218-666-11	s	RESISTOR,CHIP 82 1/16W (1608)
R737	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R738	1-218-666-11	s	RESISTOR,CHIP 82 1/16W (1608)
R739	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R740	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R741	1-216-829-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R742	1-218-696-11	s	RESISTOR,CHIP 1.5K 1/16W(1608)
R743	1-218-696-11	s	RESISTOR,CHIP 1.5K 1/16W(1608)
R744	1-216-807-11	s	RESISTOR, CHIP 68 1/16W 1608
R745	1-218-678-11	s	RESISTOR CHIP 270 1/16W (1608)

(DPR-69 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R746	1-218-678-11	s	RESISTOR CHIP 270 1/16W (1608)
R747	1-218-694-11	s	RESISTOR,CHIP 1.2K1/16W(1608)
R748	1-218-694-11	s	RESISTOR,CHIP 1.2K1/16W(1608)
R753	1-216-829-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R754	1-218-688-11	s	RESISTOR,CHIP 680 1/16W(1608)
R755	1-218-688-11	s	RESISTOR,CHIP 680 1/16W(1608)
R756	1-216-813-11	s	RESISTOR, CHIP 220 1/16W 1608
R757	1-216-829-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R758	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R759	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R761	1-218-718-11	s	RESISTOR CHIP 12K 1/16W (1608)
R762	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R764	1-218-665-11	s	RESISTOR,CHIP 75 1/16W (1608)
R765	1-218-680-11	s	RESISTOR,CHIP 330 1/16W(1608)
R766	1-218-680-11	s	RESISTOR,CHIP 330 1/16W(1608)
R769	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R770	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R801	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R802	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R803	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R806	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R807	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R808	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R809	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R810	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R811	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R812	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R813	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R814	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R815	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R816	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R833	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R834	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R835	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R836	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R837	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R839	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R840	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R841	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R842	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R843	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R845	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R852	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R858	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R901	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R902	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R907	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R908	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R909	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R912	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R914	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R915	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R916	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R917	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R918	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R919	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R921	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R922	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R923	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608

(DPR-69 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R924	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R925	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R926	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R927	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R930	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R932	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R933	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R936	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R943	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R944	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R945	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R946	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R947	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R948	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R950	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R951	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R952	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R953	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R954	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R955	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R956	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R957	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R958	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R959	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R960	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R961	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R963	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R965	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R968	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R970	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R971	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R972	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R973	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R974	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R979	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R980	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R981	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R984	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R986	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R987 *1	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R988 *1	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R989	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R990	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R991	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R992	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R993	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R994	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R995	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R996	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R997	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R999	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1002	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R1003	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R1004	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R1005	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R1006	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R1007	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R1009	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R1010	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608

(DPR-69 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1011	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R1012	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R1013	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R1014	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R1015	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R1016	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R1017	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R1018	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R1019	1-218-740-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R1020	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R1021	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R1023	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R1024	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R1025	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R1026	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R1027	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R1028	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R1029	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R1031	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R1034	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R1037	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R1038	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R1039	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R1040	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R1042	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R1043	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R1051	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1053	1-216-826-11	s	RESISTOR,CHIP 2.7K 1/16W(1608)
R1055	1-218-696-11	s	RESISTOR,CHIP 1.5K 1/16W(1608)
R1056	1-218-707-11	s	RESISTOR,CHIP 4.3K 1/16W(1608)
R1057	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1058	1-218-680-11	s	RESISTOR,CHIP 330 1/16W(1608)
R1060	1-218-734-11	s	RESISTOR,CHIP 56K 1/16W(1608)
R1061	1-218-719-11	s	RESISTOR,METAL 13K 1/16
R1062	1-218-718-11	s	RESISTOR CHIP 12K 1/16W (1608)
R1063	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R1065	1-218-682-11	s	RESISTOR,CHIP 390 1/16W (1608)
R1077	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1078	1-218-720-11	s	RESISTOR,CHIP 15K 1/16W(1608)
R1079	1-218-720-11	s	RESISTOR,CHIP 15K 1/16W(1608)
R1080	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R1081	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1082	1-218-732-11	s	RESISTOR,CHIP 47K 1/16W(1608)
R1083	1-218-732-11	s	RESISTOR,CHIP 47K 1/16W(1608)
R1084	1-218-708-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R1085	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R1086	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R1087	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R1088	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R1089	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R1090	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R1091	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R1092	1-218-707-11	s	RESISTOR,CHIP 4.3K 1/16W(1608)
R1095	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R1096	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R1101	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R1102	1-216-659-11	s	RESISTOR,CHIP 2.2K 1/10W(2012)
R1103	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R1104	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608

(DPR-69 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1105	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R1106	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R1107	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R1108	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R1109	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R1110	1-216-659-11	s	RESISTOR,CHIP 2.2K 1/10W(2012)
R1111	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R1112	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R1113	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R1114	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R1115	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R1117	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R1118	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R1119	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R1120	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R1121	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R1123	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R1124	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R1125	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R1126	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R1127	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R1128	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R1129	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R1130	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R1131	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R1132	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R1133	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R1134	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R1135	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R1136	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R1137	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R1138	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R1139	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R1140	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R1141	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R1142	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R1143	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R1144	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R1145	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R1146	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R1147	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R1148	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R1149	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R1150	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R1151	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R1152	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R1153	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R1154	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R1155	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R1156	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R1157	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R1158	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R1159	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R1200	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R1201	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R1202	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R1203	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1206	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1214	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608

(DPR-69 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1215	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R1216	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1217	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1218	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1220	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1222	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R1223	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R1225	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R1227	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1228	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R1229	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1230	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R1231	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R1233	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R1234	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R1235	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R1236	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R1238	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R1240	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R1241	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R1242	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R1246	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R1247	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R1248	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R1249	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R1250	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R1251	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R1252	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R1253	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R1254	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1255	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1256	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R1401	1-218-740-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R1402	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R1403	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R1405	1-218-674-11	s	RESISTOR CHIP 180 1/16W (1608)
R1406	1-218-674-11	s	RESISTOR CHIP 180 1/16W (1608)
R1409	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R1410	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R1416	1-218-748-11	s	RESISTOR,CHIP 220K 1/16W(1608)
R1417	1-218-728-11	s	RESISTOR,CHIP 33K 1/16W
R1418	1-218-752-11	s	RESISTOR,CHIP 330K 1/16W(1608)
R1419	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1420	1-218-676-11	s	RESISTOR,CHIP 220 1/16W(1608)
R1421	1-218-676-11	s	RESISTOR,CHIP 220 1/16W(1608)
R1422	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R1427	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R1428	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R1429	1-218-652-11	s	RESISTOR,CHIP 22 1/16W (1608)
R1430	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R1431	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R1433	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R1434	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R1439 *1	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1440	1-218-670-11	s	RESISTOR,CHIP 120 1/16W (1608)
R1441 *1	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1442 *2	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R1443	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1501	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)

(DPR-69 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1502	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R1503	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R1504	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R1505	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1506	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R1507	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R1508	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R1509	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R1510	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R1511	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R1512	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R1513	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R1515	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R1516 *1	1-249-417-11	s	RESISTOR,CARBON 1K 1/4W(SMALL)
R1516 *2	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
RB101	1-239-308-11	s	RESISTOR ARRAY,CHIP 47K
RB102	1-233-936-11	s	RESISTOR,NETWORK 10 (1608)
RB250	1-233-936-11	s	RESISTOR,NETWORK 10 (1608)
RB251	1-233-936-11	s	RESISTOR,NETWORK 10 (1608)
RB252	1-233-936-11	s	RESISTOR,NETWORK 10 (1608)
RB253	1-233-936-11	s	RESISTOR,NETWORK 10 (1608)
RB254	1-233-936-11	s	RESISTOR,NETWORK 10 (1608)
RB255	1-233-936-11	s	RESISTOR,NETWORK 10 (1608)
RB261	1-239-308-11	s	RESISTOR ARRAY,CHIP 47K
RB262	1-239-308-11	s	RESISTOR ARRAY,CHIP 47K
RB263	1-239-308-11	s	RESISTOR ARRAY,CHIP 47K
RB301	1-233-936-11	s	RESISTOR,NETWORK 10 (1608)
RB302	1-233-936-11	s	RESISTOR,NETWORK 10 (1608)
RB303	1-233-936-11	s	RESISTOR,NETWORK 10 (1608)
RB304	1-233-936-11	s	RESISTOR,NETWORK 10 (1608)
RB305	1-233-936-11	s	RESISTOR,NETWORK 10 (1608)
RB306	1-233-936-11	s	RESISTOR,NETWORK 10 (1608)
RB307	1-233-936-11	s	RESISTOR,NETWORK 10 (1608)
RB310	1-233-936-11	s	RESISTOR,NETWORK 10 (1608)
RB311	1-233-936-11	s	RESISTOR,NETWORK 10 (1608)
RB312	1-233-936-11	s	RESISTOR,NETWORK 10 (1608)
RB313	1-233-936-11	s	RESISTOR,NETWORK 10 (1608)
RB314	1-233-936-11	s	RESISTOR,NETWORK 10 (1608)
RB315	1-233-936-11	s	RESISTOR,NETWORK 10 (1608)
RB316	1-233-936-11	s	RESISTOR,NETWORK 10 (1608)
RB317	1-239-309-11	s	RESISTOR ARRAY,CHIP 100K
RB318	1-239-309-11	s	RESISTOR ARRAY,CHIP 100K
RB319	1-239-309-11	s	RESISTOR ARRAY,CHIP 100K
RB320	1-233-936-11	s	RESISTOR,NETWORK 10 (1608)
RB321	1-233-936-11	s	RESISTOR,NETWORK 10 (1608)
RB322	1-233-936-11	s	RESISTOR,NETWORK 10 (1608)
RB401	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB402	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB403	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB404	1-239-711-11	s	NETWORK, RESISTOR 0 (1608)
RB405	1-239-711-11	s	NETWORK, RESISTOR 0 (1608)
RB409	1-233-936-11	s	RESISTOR,NETWORK 10 (1608)
RB410	1-233-936-11	s	RESISTOR,NETWORK 10 (1608)
RB411	1-233-936-11	s	RESISTOR,NETWORK 10 (1608)
RB419	1-239-310-11	s	RESISTOR ARRAY, CHIP 220K
RB420	1-239-292-11	s	RESISTOR ARRAY, CHIP 33K
RB421	1-239-292-11	s	RESISTOR ARRAY, CHIP 33K
RB422	1-239-292-11	s	RESISTOR ARRAY, CHIP 33K
RB501	1-239-310-11	s	RESISTOR ARRAY, CHIP 220K

(DPR-69 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB502	1-239-292-11	s	RESISTOR ARRAY, CHIP 33K
RB503	1-239-292-11	s	RESISTOR ARRAY, CHIP 33K
RB504	1-239-292-11	s	RESISTOR ARRAY, CHIP 33K
RB505	1-239-711-11	s	NETWORK, RESISTOR 0 (1608)
RB506	1-239-711-11	s	NETWORK, RESISTOR 0 (1608)
RB507	1-233-936-11	s	RESISTOR,NETWORK 10 (1608)
RB508	1-233-936-11	s	RESISTOR,NETWORK 10 (1608)
RB509	1-233-936-11	s	RESISTOR,NETWORK 10 (1608)
RB801	1-239-711-11	s	NETWORK, RESISTOR 0 (1608)
RB802	1-239-711-11	s	NETWORK, RESISTOR 0 (1608)
RB803	1-239-711-11	s	NETWORK, RESISTOR 0 (1608)
RB804	1-239-711-11	s	NETWORK, RESISTOR 0 (1608)
RB901	1-233-936-11	s	RESISTOR,NETWORK 10 (1608)
RB902	1-233-936-11	s	RESISTOR,NETWORK 10 (1608)
RB903	1-233-936-11	s	RESISTOR,NETWORK 10 (1608)
RB904	1-233-936-11	s	RESISTOR,NETWORK 10 (1608)
RB905	1-233-936-11	s	RESISTOR,NETWORK 10 (1608)
RB906	1-233-936-11	s	RESISTOR,NETWORK 10 (1608)
RB915	1-239-309-11	s	RESISTOR ARRAY,CHIP 100K
RB916	1-239-309-11	s	RESISTOR ARRAY,CHIP 100K
RB917	1-239-308-11	s	RESISTOR ARRAY,CHIP 47K
RB918	1-239-308-11	s	RESISTOR ARRAY,CHIP 47K
RB919	1-239-308-11	s	RESISTOR ARRAY,CHIP 47K
RB920	1-239-308-11	s	RESISTOR ARRAY,CHIP 47K
RB921	1-239-303-11	s	RESISTOR ARRAY,CHIP 1K
RB1001	1-236-908-11	s	RESISTOR,NETWORK 10K (3216)
RB1002	1-236-908-11	s	RESISTOR,NETWORK 10K (3216)
RB1012	1-233-936-11	s	RESISTOR,NETWORK 10 (1608)
RB1013	1-233-936-11	s	RESISTOR,NETWORK 10 (1608)
RB1014	1-233-936-11	s	RESISTOR,NETWORK 10 (1608)
RB1020	1-233-936-11	s	RESISTOR,NETWORK 10 (1608)
RB1021	1-233-936-11	s	RESISTOR,NETWORK 10 (1608)
RB1022	1-233-936-11	s	RESISTOR,NETWORK 10 (1608)
RB1023	1-233-936-11	s	RESISTOR,NETWORK 10 (1608)
RB1024	1-233-936-11	s	RESISTOR,NETWORK 10 (1608)
RB1025	1-233-936-11	s	RESISTOR,NETWORK 10 (1608)
RB1101	1-233-936-11	s	RESISTOR,NETWORK 10 (1608)
RB1102	1-233-936-11	s	RESISTOR,NETWORK 10 (1608)
RB1103	1-233-936-11	s	RESISTOR,NETWORK 10 (1608)
RB1104	1-233-936-11	s	RESISTOR,NETWORK 10 (1608)
RB1105	1-233-936-11	s	RESISTOR,NETWORK 10 (1608)
RB1106	1-233-936-11	s	RESISTOR,NETWORK 10 (1608)
RB1107	1-239-292-11	s	RESISTOR ARRAY, CHIP 33K
RB1108	1-239-292-11	s	RESISTOR ARRAY, CHIP 33K
RB1109	1-239-292-11	s	RESISTOR ARRAY, CHIP 33K
RB1110	1-239-292-11	s	RESISTOR ARRAY, CHIP 33K
RB1111	1-233-936-11	s	RESISTOR,NETWORK 10 (1608)
RB1112	1-233-936-11	s	RESISTOR,NETWORK 10 (1608)
RB1113	1-233-936-11	s	RESISTOR,NETWORK 10 (1608)
RB1114	1-233-936-11	s	RESISTOR,NETWORK 10 (1608)
RB1115	1-233-936-11	s	RESISTOR,NETWORK 10 (1608)
RB1116	1-233-936-11	s	RESISTOR,NETWORK 10 (1608)
RB1117	1-239-309-11	s	RESISTOR ARRAY,CHIP 100K
RB1118	1-239-309-11	s	RESISTOR ARRAY,CHIP 100K
RB1200	1-239-308-11	s	RESISTOR ARRAY,CHIP 47K
RB1201	1-239-308-11	s	RESISTOR ARRAY,CHIP 47K
RB1202	1-239-308-11	s	RESISTOR ARRAY,CHIP 47K
RB1203	1-239-308-11	s	RESISTOR ARRAY,CHIP 47K
RB1204	1-239-303-11	s	RESISTOR ARRAY,CHIP 1K

(DPR-69 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB1401	1-239-621-11	s	NETWORK RESISTOR 22 (1608)
RB1402	1-239-621-11	s	NETWORK RESISTOR 22 (1608)
RB1403	1-239-621-11	s	NETWORK RESISTOR 22 (1608)
RB1404	1-239-621-11	s	NETWORK RESISTOR 22 (1608)
RB1405	1-239-621-11	s	NETWORK RESISTOR 22 (1608)
RB1406	1-239-621-11	s	NETWORK RESISTOR 22 (1608)
RB1407	1-239-621-11	s	NETWORK RESISTOR 22 (1608)
RB1408	1-239-621-11	s	NETWORK RESISTOR 22 (1608)
RB1409	1-239-621-11	s	NETWORK RESISTOR 22 (1608)
RB1410	1-239-621-11	s	NETWORK RESISTOR 22 (1608)
RB1501	1-239-444-11	s	NETWORK,RESISTOR 220K (1608)
RB1502	1-239-310-11	s	RESISTOR ARRAY, CHIP 220K
RB1503	1-239-310-11	s	RESISTOR ARRAY, CHIP 220K
RB1504	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB1505	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB1506	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB1507	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB1508	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB1509	1-239-306-11	s	RESISTOR ARRAY,CHIP 10K
RB1510	1-239-306-11	s	RESISTOR ARRAY,CHIP 10K
RB1511	1-239-306-11	s	RESISTOR ARRAY,CHIP 10K
RB1512	1-239-306-11	s	RESISTOR ARRAY,CHIP 10K
RB1513	1-239-306-11	s	RESISTOR ARRAY,CHIP 10K
RB1514	1-239-306-11	s	RESISTOR ARRAY,CHIP 10K
RB1515	1-239-306-11	s	RESISTOR ARRAY,CHIP 10K
RB1516	1-239-306-11	s	RESISTOR ARRAY,CHIP 10K
RB1517	1-239-306-11	s	RESISTOR ARRAY,CHIP 10K
RB1518	1-239-306-11	s	RESISTOR ARRAY,CHIP 10K
RB1519	1-233-936-11	s	RESISTOR,NETWORK 10 (1608)
RB1520	1-233-936-11	s	RESISTOR,NETWORK 10 (1608)
RB1521	1-233-936-11	s	RESISTOR,NETWORK 10 (1608)
RB1522	1-233-936-11	s	RESISTOR,NETWORK 10 (1608)
RB1523	1-233-936-11	s	RESISTOR,NETWORK 10 (1608)
RB1524	1-233-936-11	s	RESISTOR,NETWORK 10 (1608)
RB1525	1-236-904-11	s	RESISTOR NETWORK 1K (1608)
RV301	1-237-035-11	s	RESISTOR,ADJ,CERMET 5K
RV601	1-241-265-11	s	RESISTOR ADJ 20K (CERMET)
RV602	1-241-264-11	s	RESISTOR ADJ 10K (CERMET)
S101	1-692-271-31	s	SWITCH, SLIDE
S601	1-571-275-31	s	SWITCH,SLIDE (1-1-2)
THP1 ⚠	1-810-792-11	s	THERMISTOR, POSITIVE
THP2 ⚠	1-810-792-11	s	THERMISTOR, POSITIVE
THP3 ⚠	1-762-254-21	s	SWITCH, POLY
THP4 ⚠	1-810-792-11	s	THERMISTOR, POSITIVE
THP5 ⚠	1-762-254-21	s	SWITCH, POLY
THP6 ⚠	1-762-254-21	s	SWITCH, POLY
THP7 ⚠	1-803-150-11	s	THERMISTOR, POSITIVE
THP8 ⚠	1-803-150-11	s	THERMISTOR, POSITIVE
THP9 ⚠	1-803-150-11	s	THERMISTOR, POSITIVE
TP301 *2	1-535-877-22	o	CHIP, CHECKER (TEST POINT)
X301	1-767-066-11	s	OSCILLATOR, VOLTAGE CRYSTAL
X1001	1-767-512-11	s	OSCILLATOR, CRYSTAL

IF-730 BOARD
---

*1: Serial No. 10001 through 10010 (CCU-900 UC)
Serial No. 40001 through 40007 (CCU-900P)
*2: Serial No. 10011 and higher (CCU-900 UC)
Serial No. 30001 and higher (CCU-900 J)
Serial No. 40008 and higher (CCU-900P)
*3: Serial No. 10001 through 10020 (CCU-900 UC)
Serial No. 40001 through 40007 (CCU-900P)
*4: Serial No. 10021 and higher (CCU-900 UC)
Serial No. 30001 and higher (CCU-900 J)
Serial No. 40008 and higher (CCU-900P)

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8325-791-A	o	MOUNTED CIRCUIT BOARD, IF-730
1pc	3-627-223-01	o	REAR PC BOARD LID,UPPER
1pc	3-627-224-01	o	PEAR PC BOARD LID,LOWER
1pc	3-627-225-01	o	SPRING,SHIELD
1pc	3-627-841-01	o	PC BOARD PANEL,IF-730
4pcs	7-621-775-08	s	SCREW +B2.6X3
14pcs	7-627-556-37	s	SCREW,PRECISION +P2.6X4 TYPE 1
6pcs	7-682-947-01	s	SCREW +PSW 3X6
C1	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C3	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C4	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C5	1-135-212-21	s	CAPACITOR TANTALUM 2.2MF/35V
C6	1-135-212-21	s	CAPACITOR TANTALUM 2.2MF/35V
C7	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C9	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C10	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C11	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C12	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C13	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C14	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C15	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C16	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C17	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C18	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C19	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C20	1-107-884-11	s	CAPACITOR,ELECT 1000MF/16V
C21	1-107-884-11	s	CAPACITOR,ELECT 1000MF/16V
C22	1-107-884-11	s	CAPACITOR,ELECT 1000MF/16V
C23	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C24	1-135-212-21	s	CAPACITOR TANTALUM 2.2MF/35V
C26	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C28	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C29	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C32	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C33	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C34	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C35	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C36	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C101	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C105	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C106	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C107	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C108	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C109	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C110	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C111	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C112	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C113	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B

(IF-730 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C114	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C127	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C128	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C129	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C130	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C131	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C132	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C133	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C134	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C135	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C136	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C137	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C138	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C139	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C140	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C141	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C142	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C146	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C147	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C148	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C151	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C152	1-162-915-11	s	CAPACITOR,CERAMIC 10PF/50V CH
C153	1-162-915-11	s	CAPACITOR,CERAMIC 10PF/50V CH
C154	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C155	1-162-915-11	s	CAPACITOR,CERAMIC 10PF/50V CH
C156	1-162-915-11	s	CAPACITOR,CERAMIC 10PF/50V CH
C157	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C158	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C159	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C160	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C161	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C164	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C165	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C166	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C167	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C169	1-162-915-11	s	CAPACITOR,CERAMIC 10PF/50V CH
C170	1-162-915-11	s	CAPACITOR,CERAMIC 10PF/50V CH
C171	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C172	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C173	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C174	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C305	1-162-915-11	s	CAPACITOR,CERAMIC 10PF/50V CH
C306	1-162-915-11	s	CAPACITOR,CERAMIC 10PF/50V CH
C307	1-162-915-11	s	CAPACITOR,CERAMIC 10PF/50V CH
C308	1-162-915-11	s	CAPACITOR,CERAMIC 10PF/50V CH
C309	1-162-919-11	s	CAPACITOR,CERAMIC 22PF/50V CH
C310	1-162-919-11	s	CAPACITOR,CERAMIC 22PF/50V CH
C311	1-162-919-11	s	CAPACITOR,CERAMIC 22PF/50V CH
C312	1-162-919-11	s	CAPACITOR,CERAMIC 22PF/50V CH
C313	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C314	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C315	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C316	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C317	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C318	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C319	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C320	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C321	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C322	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)

(IF-730 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C323	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C324	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C325	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C326	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C327	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C328	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C332	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C333	1-162-915-11	s	CAPACITOR,CERAMIC 10PF/50V CH
C334	1-162-915-11	s	CAPACITOR,CERAMIC 10PF/50V CH
C335	1-162-919-11	s	CAPACITOR,CERAMIC 22PF/50V CH
C336	1-162-921-11	s	CAPACITOR,CERAMIC 33PF/50V CH
C337	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C338	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C339	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C340	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C341	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C342	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C343	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C344	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C345	1-162-909-11	s	CAPACITOR,CERAMIC 4PF/50V CH
C346	1-162-921-11	s	CAPACITOR,CERAMIC 33PF/50V CH
C347	1-113-642-11	s	CAPACITOR, TANTALUM 47MF/10V
C348	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C349	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C350	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C351	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C361	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C362	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C401	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C402	1-162-919-11	s	CAPACITOR,CERAMIC 22PF/50V CH
C403	1-126-391-11	s	CAPACITOR ELECT 47MF/6.3V(105)
C404	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C405	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C406	1-115-156-11	s	CAPACITOR,CERAMIC 1MF/10V(1608
C407	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C408	1-115-156-11	s	CAPACITOR,CERAMIC 1MF/10V(1608
C409	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C410	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C411	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C412	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C413	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C414	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C415	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C416	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C417	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C418	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C419	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C420	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C421	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C422	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C423	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C424	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C425	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C426	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C427	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C428	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C440	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C441	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C444	1-126-391-11	s	CAPACITOR ELECT 47MF/6.3V(105)

(IF-730 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C445	1-126-391-11	s	CAPACITOR ELECT 47MF/6.3V(105)
C446	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C447	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C457	1-104-852-11	s	CAPACITOR,TANTALUM 22MF/10V
C458	1-104-852-11	s	CAPACITOR,TANTALUM 22MF/10V
C459	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C460	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C461	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C462	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C463	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C464	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C466	1-126-391-11	s	CAPACITOR ELECT 47MF/6.3V(105)
C467	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C468	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C471	1-115-156-11	s	CAPACITOR,CERAMIC 1MF/10V(1608
C476	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C477	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C479	1-126-391-11	s	CAPACITOR ELECT 47MF/6.3V(105)
C480	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C481	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C482	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C483	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C484	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C485	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C503	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C504	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C519	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C520	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C521	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C522	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C523	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C524	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C525	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C526	1-162-919-11	s	CAPACITOR,CERAMIC 22PF/50V CH
C527	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C528	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C529	1-115-156-11	s	CAPACITOR,CERAMIC 1MF/10V(1608
C530	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C531	1-115-156-11	s	CAPACITOR,CERAMIC 1MF/10V(1608
C532	1-115-156-11	s	CAPACITOR,CERAMIC 1MF/10V(1608
C533	1-115-156-11	s	CAPACITOR,CERAMIC 1MF/10V(1608
C534	1-115-156-11	s	CAPACITOR,CERAMIC 1MF/10V(1608
C535	1-115-156-11	s	CAPACITOR,CERAMIC 1MF/10V(1608
C536	1-115-156-11	s	CAPACITOR,CERAMIC 1MF/10V(1608
C537	1-115-156-11	s	CAPACITOR,CERAMIC 1MF/10V(1608
C538	1-115-156-11	s	CAPACITOR,CERAMIC 1MF/10V(1608
C539	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C540	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C541	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C542	1-115-416-11	s	CAPACITOR,CERAMIC 1000PF/25V
C543	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C544	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C545	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C546	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C547	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C548	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C549	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C550	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C551	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F

(IF-730 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C552	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C553	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C554	1-162-916-11	s	CAPACITOR,CERAMIC 12PF/50V CH
C555	1-162-916-11	s	CAPACITOR,CERAMIC 12PF/50V CH
C556	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C557	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
CN6	1-695-889-21	s	PIN, CONNECTOR (PC BOARD) 10P
CN101	1-764-273-11	s	CONNECTOR, COAXIAL (BNC TYPE)
CN102	1-764-273-11	s	CONNECTOR, COAXIAL (BNC TYPE)
CN104	1-764-273-11	s	CONNECTOR, COAXIAL (BNC TYPE)
CN106	1-764-273-11	s	CONNECTOR, COAXIAL (BNC TYPE)
CN107	1-764-273-11	s	CONNECTOR, COAXIAL (BNC TYPE)
CN109	1-764-273-11	s	CONNECTOR, COAXIAL (BNC TYPE)
CN301	1-764-273-11	s	CONNECTOR, COAXIAL (BNC TYPE)
CN302	1-764-273-11	s	CONNECTOR, COAXIAL (BNC TYPE)
CN303	1-764-273-11	s	CONNECTOR, COAXIAL (BNC TYPE)
CN304	1-764-273-11	s	CONNECTOR, COAXIAL (BNC TYPE)
CN305	1-764-273-11	s	CONNECTOR, COAXIAL (BNC TYPE)
CN307	1-764-273-11	s	CONNECTOR, COAXIAL (BNC TYPE)
D1	8-719-157-23	s	DIODE RD4.7M-B
D2	8-719-157-23	s	DIODE RD4.7M-B
D3	8-719-157-23	s	DIODE RD4.7M-B
D4	8-719-063-83	s	LED SML-510MWT86
D5	8-719-063-83	s	LED SML-510MWT86
D6	8-719-063-83	s	LED SML-510MWT86
D7	8-719-157-23	s	DIODE RD4.7M-B
D402	8-719-024-81	s	DIODE 1SS300-TE85L
D411	8-719-800-76	s	DIODE 1SS226
FL301	1-239-913-41	s	FILTER, LOW PASS
FL302	1-239-913-41	s	FILTER, LOW PASS
FL303	1-239-913-41	s	FILTER, LOW PASS
FL304	1-239-913-41	s	FILTER, LOW PASS
FL305	1-239-913-41	s	FILTER, LOW PASS
FL306	1-234-514-11	s	DELAY LINE
FL307	1-781-892-11	s	FILTER, LOW PASS
FL401	1-234-514-11	s	DELAY LINE
FL402	1-781-892-11	s	FILTER, LOW PASS
IC1	8-759-669-45	s	IC TL062CPWR-12
IC2	8-759-669-45	s	IC TL062CPWR-12
IC3	8-759-662-35	s	IC 74VHCT04MTCX
IC4 *1	8-759-562-40	s	IC CAT24WC02J-TE13
IC4 *2	8-759-678-06	s	IC CAT24WC02JI-TE13
IC5	8-759-973-71	s	IC TL7705CPS-B
IC6	8-759-185-42	s	IC LM4040AIM3-2.5
IC7	8-759-472-43	s	IC 74VHC245MTCX
IC101	8-759-561-69	s	IC PCF8574TS-T
IC102	8-759-561-69	s	IC PCF8574TS-T
IC103	8-759-637-57	s	IC CLC450AJM5
IC104	8-759-637-57	s	IC CLC450AJM5
IC105	8-759-637-57	s	IC CLC450AJM5
IC106	8-759-637-57	s	IC CLC450AJM5
IC107	8-759-637-57	s	IC CLC450AJM5
IC108	8-759-472-72	s	IC 74VHC4051MX
IC109	8-759-472-72	s	IC 74VHC4051MX
IC110	8-759-472-72	s	IC 74VHC4051MX
IC111	8-759-637-57	s	IC CLC450AJM5
IC112	8-759-637-57	s	IC CLC450AJM5
IC113	8-759-637-57	s	IC CLC450AJM5

(IF-730 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC301	8-759-054-61	s	IC CLC505AJE
IC302	8-759-054-61	s	IC CLC505AJE
IC303	8-759-054-61	s	IC CLC505AJE
IC304	8-759-054-61	s	IC CLC505AJE
IC305	8-759-054-61	s	IC CLC505AJE
IC306	8-759-054-61	s	IC CLC505AJE
IC307	8-759-082-57	s	IC TC7W04FU
IC308	8-759-082-61	s	IC TC4W53FU
IC405	8-759-456-26	s	IC 74LCX541MTCX
IC406	8-759-456-26	s	IC 74LCX541MTCX
IC409	8-759-637-57	s	IC CLC450AJM5
IC412	8-759-637-57	s	IC CLC450AJM5
IC413	8-759-590-20	s	IC ADS822E/1K
IC415	8-759-445-73	s	IC M66256FP (E2)
IC416	8-759-561-69	s	IC PCF8574TS-T
IC417	8-759-662-38	s	IC 74VHCT08AMTCX
IC419	8-759-594-34	s	IC HMP8117CN
IC420	8-759-472-59	s	IC 74VHC541MTCX
IC421	8-759-472-59	s	IC 74VHC541MTCX
IC424	8-759-456-26	s	IC 74LCX541MTCX
IC425	8-759-456-26	s	IC 74LCX541MTCX
IC426	8-759-594-34	s	IC HMP8117CN
IC427	8-759-445-73	s	IC M66256FP (E2)
IC431	8-759-472-59	s	IC 74VHC541MTCX
IC432	8-759-662-37	s	IC 74VHCT00AMTCX
IC433	8-759-271-86	s	IC TC7SH04FU
IC434	8-759-271-86	s	IC TC7SH04FU
IC435	8-759-196-96	s	IC TC7SH08FU (TE85R)
L1	1-414-529-21	s	INDUCTOR (POWER)
L2	1-414-529-21	s	INDUCTOR (POWER)
L4	1-414-529-21	s	INDUCTOR (POWER)
L8	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L9	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L10	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L101	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L102	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L103	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L104	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L105	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L106	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L107	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L108	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L109	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L110	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L111	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L112	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L113	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L116	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L117	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L118	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L301	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L302	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L303	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L304	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L305	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L306	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L307	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L308	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)

(IF-730 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
L309	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L310	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L311	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L312	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L313	1-410-656-11	s	INDUCTOR,CHIP 150UH (3225)
L314	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L315	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L401	1-410-380-31	s	INDUCTOR,CHIP 8.2UH (3225)
L402	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L403	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L404	1-412-026-11	s	INDUCTOR,CHIP 1UH (3225)
L407	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L408	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L411	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L412	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L413	1-412-026-11	s	INDUCTOR,CHIP 1UH (3225)
L416	1-410-380-31	s	INDUCTOR,CHIP 8.2UH (3225)
L417	1-412-026-11	s	INDUCTOR,CHIP 1UH (3225)
L418	1-412-026-11	s	INDUCTOR,CHIP 1UH (3225)
L419	1-412-026-11	s	INDUCTOR,CHIP 1UH (3225)
L420	1-412-026-11	s	INDUCTOR,CHIP 1UH (3225)
L421	1-412-026-11	s	INDUCTOR,CHIP 1UH (3225)
Q1	8-729-113-13	s	TRANSISTOR FA1A4M-L33
Q2	8-729-113-13	s	TRANSISTOR FA1A4M-L33
Q3	8-729-105-19	s	TRANSISTOR 2SC3518L
Q4	8-729-113-13	s	TRANSISTOR FA1A4M-L33
Q301	8-729-117-16	s	TRANSISTOR 2SA1611M6
Q302	8-729-117-32	s	TRANSISTOR 2SC4177
Q401	8-729-040-48	s	TRANSISTOR 2SA1688-4-SONY-TL
Q402	8-729-117-32	s	TRANSISTOR 2SC4177
R2	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R3	1-218-727-11	s	RESISTOR,CHIP 30K 1/16W(1608)
R4	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R5	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R7	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R8	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R9	1-218-732-11	s	RESISTOR,CHIP 47K 1/16W(1608)
R10	1-218-732-11	s	RESISTOR,CHIP 47K 1/16W(1608)
R11	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R12	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R13	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R14	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R16	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R17	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R20	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R21	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R22	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R24	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R29	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R31	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R32	1-216-813-11	s	RESISTOR, CHIP 220 1/16W 1608
R33	1-216-813-11	s	RESISTOR, CHIP 220 1/16W 1608
R34	1-216-813-11	s	RESISTOR, CHIP 220 1/16W 1608
R35	1-216-823-11	s	RESISTOR, CHIP 1.5K 1/16W
R36	1-216-823-11	s	RESISTOR, CHIP 1.5K 1/16W
R37	1-216-823-11	s	RESISTOR, CHIP 1.5K 1/16W
R39	1-216-813-11	s	RESISTOR, CHIP 220 1/16W 1608
R40	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)

(IF-730 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R41	1-218-717-11	s	RESISTOR,CHIP 11K 1/16W (1608)
R42	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R44	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R46	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R47	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R48	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R49	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R50	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R51	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R52	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R53	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R54	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R55	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R56	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R57	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R58	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R59	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R60	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R61	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R102	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R103	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R104	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R105	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R106	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R107	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R108	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R109	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R110	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R111	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R113	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R115	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R116	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R117	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R118	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R119	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R123	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R127	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R131	1-218-665-11	s	RESISTOR,CHIP 75 1/16W (1608)
R132	1-218-665-11	s	RESISTOR,CHIP 75 1/16W (1608)
R133	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R134	1-218-665-11	s	RESISTOR,CHIP 75 1/16W (1608)
R135	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R136	1-218-665-11	s	RESISTOR,CHIP 75 1/16W (1608)
R137	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R138	1-218-665-11	s	RESISTOR,CHIP 75 1/16W (1608)
R139	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R140	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R141	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R142	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R143	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R144	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R145	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R146	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R147	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R148	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R149	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R150	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R151	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R152	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)

(IF-730 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R153	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R154	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R155	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R156	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R157	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R158	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R159	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R168	1-218-665-11	s	RESISTOR,CHIP 75 1/16W (1608)
R169	1-218-665-11	s	RESISTOR,CHIP 75 1/16W (1608)
R170	1-218-665-11	s	RESISTOR,CHIP 75 1/16W (1608)
R171	1-218-665-11	s	RESISTOR,CHIP 75 1/16W (1608)
R172	1-218-690-11	s	RESISTOR,CHIP 820 1/16W (1608)
R173	1-218-690-11	s	RESISTOR,CHIP 820 1/16W (1608)
R174	1-218-690-11	s	RESISTOR,CHIP 820 1/16W (1608)
R175	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R176	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R177	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R180	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R181	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R182	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R183	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R184	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R185	1-218-684-11	s	RESISTOR,CHIP 470 1/16W (1608)
R186	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R187	1-218-664-11	s	RESISTOR,CHIP 68 1/16W (1608)
R188	1-218-664-11	s	RESISTOR,CHIP 68 1/16W (1608)
R189	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R190	1-218-684-11	s	RESISTOR,CHIP 470 1/16W (1608)
R191	1-218-684-11	s	RESISTOR,CHIP 470 1/16W (1608)
R193	1-218-665-11	s	RESISTOR,CHIP 75 1/16W (1608)
R194	1-218-665-11	s	RESISTOR,CHIP 75 1/16W (1608)
R202	1-218-664-11	s	RESISTOR,CHIP 68 1/16W (1608)
R203	1-218-665-11	s	RESISTOR,CHIP 75 1/16W (1608)
R204	1-218-684-11	s	RESISTOR,CHIP 470 1/16W (1608)
R301	1-218-660-91	s	RESISTOR,CHIP 47 1/16W (1608)
R302	1-218-660-91	s	RESISTOR,CHIP 47 1/16W (1608)
R303	1-218-660-91	s	RESISTOR,CHIP 47 1/16W (1608)
R304	1-218-660-91	s	RESISTOR,CHIP 47 1/16W (1608)
R305	1-218-696-11	s	RESISTOR,CHIP 1.5K 1/16W(1608)
R306	1-218-696-11	s	RESISTOR,CHIP 1.5K 1/16W(1608)
R307	1-218-696-11	s	RESISTOR,CHIP 1.5K 1/16W(1608)
R308	1-218-696-11	s	RESISTOR,CHIP 1.5K 1/16W(1608)
R313	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R314	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R315	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R316	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R317	1-216-846-11	s	RESISTOR,CHIP 120K 1/16W (1608
R318	1-216-846-11	s	RESISTOR,CHIP 120K 1/16W (1608
R319	1-216-846-11	s	RESISTOR,CHIP 120K 1/16W (1608
R320	1-216-846-11	s	RESISTOR,CHIP 120K 1/16W (1608
R321	1-218-664-11	s	RESISTOR,CHIP 68 1/16W (1608)
R322	1-218-664-11	s	RESISTOR,CHIP 68 1/16W (1608)
R323	1-218-664-11	s	RESISTOR,CHIP 68 1/16W (1608)
R324	1-218-664-11	s	RESISTOR,CHIP 68 1/16W (1608)
R325	1-218-684-11	s	RESISTOR,CHIP 470 1/16W (1608)
R326	1-218-684-11	s	RESISTOR,CHIP 470 1/16W (1608)
R327	1-218-684-11	s	RESISTOR,CHIP 470 1/16W (1608)
R328	1-218-684-11	s	RESISTOR,CHIP 470 1/16W (1608)
R329	1-218-665-11	s	RESISTOR,CHIP 75 1/16W (1608)

(IF-730 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R330	1-218-665-11	s	RESISTOR,CHIP 75 1/16W (1608)
R331	1-218-665-11	s	RESISTOR,CHIP 75 1/16W (1608)
R332	1-218-665-11	s	RESISTOR,CHIP 75 1/16W (1608)
R333	1-218-644-11	s	RESISTOR,CHIP 10 1/16W
R334	1-218-644-11	s	RESISTOR,CHIP 10 1/16W
R335	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R336	1-218-696-11	s	RESISTOR,CHIP 1.5K 1/16W(1608)
R337	1-218-696-11	s	RESISTOR,CHIP 1.5K 1/16W(1608)
R339	1-218-682-11	s	RESISTOR,CHIP 390 1/16W (1608)
R340	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R341	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R342	1-216-846-11	s	RESISTOR,CHIP 120K 1/16W (1608
R343	1-216-846-11	s	RESISTOR,CHIP 120K 1/16W (1608
R345	1-218-664-11	s	RESISTOR,CHIP 68 1/16W (1608)
R346	1-218-664-11	s	RESISTOR,CHIP 68 1/16W (1608)
R347	1-218-684-11	s	RESISTOR,CHIP 470 1/16W (1608)
R348	1-218-684-11	s	RESISTOR,CHIP 470 1/16W (1608)
R349	1-218-706-11	s	RESISTOR,CHIP 3.9K 1/16W(1608)
R350	1-218-665-11	s	RESISTOR,CHIP 75 1/16W (1608)
R351	1-218-665-11	s	RESISTOR,CHIP 75 1/16W (1608)
R352	1-218-698-11	s	RESISTOR,CHIP 1.8K 1/16W(1608)
R353	1-218-694-11	s	RESISTOR,CHIP 1.2K1/16W(1608)
R354	1-218-708-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R355	1-218-702-11	s	RESISTOR CHIP 2.7K 1/16W(1608)
R356	1-218-708-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R357	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R358	1-218-720-11	s	RESISTOR,CHIP 15K 1/16W(1608)
R360	1-218-644-11	s	RESISTOR,CHIP 10 1/16W
R361	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R362	1-218-680-11	s	RESISTOR,CHIP 330 1/16W(1608)
R363	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R364	1-218-680-11	s	RESISTOR,CHIP 330 1/16W(1608)
R365	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R366	1-218-680-11	s	RESISTOR,CHIP 330 1/16W(1608)
R367	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R368	1-218-680-11	s	RESISTOR,CHIP 330 1/16W(1608)
R369	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R370	1-218-680-11	s	RESISTOR,CHIP 330 1/16W(1608)
R384	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R401	1-218-706-11	s	RESISTOR,CHIP 3.9K 1/16W(1608)
R402	1-218-670-11	s	RESISTOR,CHIP 120 1/16W (1608)
R403	1-218-679-91	s	RESISTOR,CHIP 300 1/16W
R404	1-218-653-11	s	RESISTOR,CHIP 24 1/16W (1608)
R405	1-218-718-11	s	RESISTOR CHIP 12K 1/16W (1608)
R406	1-218-718-11	s	RESISTOR CHIP 12K 1/16W (1608)
*3 R407	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R408	1-218-665-11	s	RESISTOR,CHIP 75 1/16W (1608)
R409	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R410	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R411	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R412	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R413	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R414	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
*4 R415	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R416	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R417	1-218-718-11	s	RESISTOR CHIP 12K 1/16W (1608)
R418	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
*4 R419	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
*3 R420	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608

(IF-730 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R425	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R433	1-218-706-11	s	RESISTOR,CHIP 3.9K 1/16W(1608)
R434	1-218-670-11	s	RESISTOR,CHIP 120 1/16W (1608)
R435	1-218-679-91	s	RESISTOR,CHIP 300 1/16W
R436	1-218-653-11	s	RESISTOR,CHIP 24 1/16W (1608)
R438	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R439	1-218-718-11	s	RESISTOR CHIP 12K 1/16W (1608)
R440	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R443	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
*3 R444	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
*4 R444	1-216-813-11	s	RESISTOR,CHIP 220 1/16W 1608
R445	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R479	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R490	1-218-708-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R492	1-218-708-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R498	1-218-682-11	s	RESISTOR,CHIP 390 1/16W (1608)
R504	1-218-682-11	s	RESISTOR,CHIP 390 1/16W (1608)
R505	1-218-684-11	s	RESISTOR,CHIP 470 1/16W (1608)
R506	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R508	1-218-708-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R509	1-218-708-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R511	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R512	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R513	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R514	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R515	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R516	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R518	1-218-720-11	s	RESISTOR,CHIP 15K 1/16W(1608)
R519	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R520	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R521	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R522	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R523	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R524	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R525	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R526	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R527	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R528	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R529	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R530	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R533	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R534	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R535	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R536	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R537	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R538	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R539	1-218-665-11	s	RESISTOR,CHIP 75 1/16W (1608)
R543	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R544	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R545	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R549	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R551	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R552	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R553	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R554	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R555	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R556	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R557	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R559	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608

(IF-730 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R563	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R565	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R566	1-216-857-11	s	RESISTOR,CHIP 1M 1/16W(1608)
R567	1-216-820-11	s	RESISTOR, CHIP 820 1/16W 1608
R573	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R574	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R575	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R576	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R577	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R578	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R579	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R580	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R581	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R582	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R583	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
RB2	1-233-936-11	s	RESISTOR,NETWORK 10 (1608)
RB401	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB402	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB403	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB404	1-233-936-11	s	RESISTOR,NETWORK 10 (1608)
RB405	1-233-936-11	s	RESISTOR,NETWORK 10 (1608)
RB406	1-233-936-11	s	RESISTOR,NETWORK 10 (1608)
RB407	1-233-936-11	s	RESISTOR,NETWORK 10 (1608)
RB408	1-233-936-11	s	RESISTOR,NETWORK 10 (1608)
RB409	1-233-936-11	s	RESISTOR,NETWORK 10 (1608)
RB410	1-233-936-11	s	RESISTOR,NETWORK 10 (1608)
RB411	1-233-936-11	s	RESISTOR,NETWORK 10 (1608)
RB412	1-233-936-11	s	RESISTOR,NETWORK 10 (1608)
RB413	1-239-306-11	s	RESISTOR ARRAY,CHIP 10K
RB414	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB415	1-239-306-11	s	RESISTOR ARRAY,CHIP 10K
RB416	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB417	1-233-936-11	s	RESISTOR,NETWORK 10 (1608)
RB418	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB419	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RV101	1-237-033-11	s	RESISTOR,ADJ,CERMET 1K
RV102	1-237-033-11	s	RESISTOR,ADJ,CERMET 1K
RV301	1-237-032-11	s	RESISTOR,ADJ,CERMET 500
RV302	1-237-032-11	s	RESISTOR,ADJ,CERMET 500
RV303	1-237-032-11	s	RESISTOR,ADJ,CERMET 500
RV304	1-237-032-11	s	RESISTOR,ADJ,CERMET 500
RV305	1-237-032-11	s	RESISTOR,ADJ,CERMET 500
RV306	1-237-032-11	s	RESISTOR,ADJ,CERMET 500
RV307	1-237-033-11	s	RESISTOR,ADJ,CERMET 1K
RV308	1-237-033-11	s	RESISTOR,ADJ,CERMET 1K
RV309	1-237-033-11	s	RESISTOR,ADJ,CERMET 1K
RV310	1-237-033-11	s	RESISTOR,ADJ,CERMET 1K
RV311	1-237-033-11	s	RESISTOR,ADJ,CERMET 1K
RV312	1-237-033-11	s	RESISTOR,ADJ,CERMET 1K
RV401	1-237-032-11	s	RESISTOR,ADJ,CERMET 500
RV402	1-237-036-11	s	RESISTOR, ADJ,CERMET 10K
THP1	⚠ 1-810-792-11	s	THERMISTOR, POSITIVE
THP2	⚠ 1-810-792-11	s	THERMISTOR, POSITIVE
THP4	⚠ 1-810-792-11	s	THERMISTOR, POSITIVE
X1	1-767-924-21	s	VIBRATOR, CRYSTAL

MB-647 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8325-793-A	o	MOUNTED CIRCUIT BOARD, MB-647
CN1	1-566-444-11	o	PIN,D-SUB CONNECTOR 50P
CN2	1-691-291-11	o	PIN,CONNECTOR(PC BOARD)5P
CN3	1-580-533-11	o	PIN, CONNECTOR (PC BOARD) 8P
CN4	1-564-704-11	s	PIN,CONNECTOR (2P)
CN26	1-778-022-11	o	CONNECTOR, BOARD TO BOARD 24P
CN36	1-778-022-11	o	CONNECTOR, BOARD TO BOARD 24P
CN46	1-778-022-11	o	CONNECTOR, BOARD TO BOARD 24P

RX-42 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	⚠ A-8327-702-A	o	RX-42 ASSY

SDI-31 BOARD
---

*1: Serial No. 10001 through 10010 (CCU-900 UC)
    Serial No. 40001 through 40007 (CCU-900P)
*2: Serial No. 10011 and higher (CCU-900 UC)
    Serial No. 30001 and higher (CCU-900 J)
    Serial No. 40008 and higher (CCU-900P)

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8325-790-A	o	MOUNTED CIRCUIT BOARD, SDI-31
1pc	3-627-223-01	o	REAR PC BOARD LID,UPPER
1pc	3-627-224-01	o	PEAR PC BOARD LID,LOWER
1pc	3-627-225-01	o	SPRING,SHIELD
1pc	3-627-840-01	o	PC BOARD PANEL,SDI-31
4pcs	7-621-775-08	s	SCREW +B2.6X3
14pcs	7-627-556-37	s	SCREW,PRECISION +P2.6X4 TYPE 1
6pcs	7-682-947-01	s	SCREW +PSW 3X6
1pc	1-784-240-11	s	CONVERTER, COAXIAL CONNECTOR
1pc	1-784-240-11	s	CONVERTER, COAXIAL CONNECTOR
1pc	1-784-240-11	s	CONVERTER, COAXIAL CONNECTOR
1pc	1-784-240-11	s	CONVERTER, COAXIAL CONNECTOR
1pc	1-784-240-11	s	CONVERTER, COAXIAL CONNECTOR
1pc	1-784-240-11	s	CONVERTER, COAXIAL CONNECTOR
1pc	1-784-240-11	s	CONVERTER, COAXIAL CONNECTOR
1pc	1-784-240-11	s	CONVERTER, COAXIAL CONNECTOR
1pc	1-784-240-11	s	CONVERTER, COAXIAL CONNECTOR
1pc	1-783-252-11	s	CABLE ASSEMBLY, COAXIAL
1pc	1-783-252-11	s	CABLE ASSEMBLY, COAXIAL
1pc	1-783-252-11	s	CABLE ASSEMBLY, COAXIAL
1pc	1-783-252-11	s	CABLE ASSEMBLY, COAXIAL
1pc	1-783-252-11	s	CABLE ASSEMBLY, COAXIAL
1pc	1-783-252-11	s	CABLE ASSEMBLY, COAXIAL
1pc	1-783-252-11	s	CABLE ASSEMBLY, COAXIAL
1pc	1-783-252-11	s	CABLE ASSEMBLY, COAXIAL
1pc	1-783-252-11	s	CABLE ASSEMBLY, COAXIAL
1pc	1-783-252-11	s	CABLE ASSEMBLY, COAXIAL
C1	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C2	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C3	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C4	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C7	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C8	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C9	1-135-212-21	s	CAPACITOR TANTALUM 2.2MF/35V
C10	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C11	1-135-212-21	s	CAPACITOR TANTALUM 2.2MF/35V
C13	1-107-689-21	s	CAPACITOR,TANTALUM 1MF/35V
C14	1-107-689-21	s	CAPACITOR,TANTALUM 1MF/35V
C15	1-107-689-21	s	CAPACITOR,TANTALUM 1MF/35V
C16	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C17	1-126-168-11	s	CAPACITOR,ELECT 1000MF/6.3V
C18	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C20	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C21	1-126-397-11	s	CAPACITOR ELECT 33MF/25V(CHIP)
C22	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C23	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C24	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C25	1-126-168-11	s	CAPACITOR,ELECT 1000MF/6.3V

(SDI-31 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C26	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C27	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C28	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C29	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C34	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C35	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C36	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C201	1-115-156-11	s	CAPACITOR,CERAMIC 1MF/10V(1608
C202	1-115-156-11	s	CAPACITOR,CERAMIC 1MF/10V(1608
C203	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C204	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C205	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C206	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C207	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C208	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C209	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C210	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C211	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C212	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C214	1-164-346-11	s	CAPACITOR CHIP CERAMIC 1MF/16V
C215	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C216	1-135-259-11	s	CAPACITOR,TANTALUM 10MF/6.3V
C217	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C218	1-162-915-11	s	CAPACITOR,CERAMIC 10PF/50V CH
C220	1-164-346-11	s	CAPACITOR CHIP CERAMIC 1MF/16V
C221	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C222	1-135-259-11	s	CAPACITOR,TANTALUM 10MF/6.3V
C223	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C224	1-162-915-11	s	CAPACITOR,CERAMIC 10PF/50V CH
C225	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C226	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C227	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C228	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C229	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C230	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C231	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C232	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C233	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C234	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C235	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C236	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C237	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C238	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C239	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C240	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C241	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C242	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C243	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C244	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C245	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C246	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C247	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C248	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C249	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C250	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C251	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C252	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C253	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C254	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C255	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F

(SDI-31 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C256	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C257	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C258	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C259	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C260	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C261	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C262	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C265	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C266	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C268	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C269	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C271	1-115-156-11	s	CAPACITOR,CERAMIC 1MF/10V(1608
C272	1-115-156-11	s	CAPACITOR,CERAMIC 1MF/10V(1608
C273	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C274	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C275	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C276	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C277	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C278	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C279	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C280	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C281	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C282	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C284	1-164-346-11	s	CAPACITOR CHIP CERAMIC 1MF/16V
C285	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C286	1-135-259-11	s	CAPACITOR,TANTALUM 10MF/6.3V
C287	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C288	1-162-915-11	s	CAPACITOR,CERAMIC 10PF/50V CH
C290	1-164-346-11	s	CAPACITOR CHIP CERAMIC 1MF/16V
C291	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C292	1-135-259-11	s	CAPACITOR,TANTALUM 10MF/6.3V
C293	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C294	1-162-915-11	s	CAPACITOR,CERAMIC 10PF/50V CH
C295	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C296	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C297	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C298	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C299	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C300	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C301	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C302	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C303	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C304	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C305	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C306	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C307	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C308	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C309	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C310	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C311	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C312	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C313	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C314	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C315	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C316	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C317	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C318	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C319	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C320	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C321	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F

(SDI-31 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C322	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C323	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C324	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C325	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C326	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C327	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C328	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C329	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C330	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C331	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C332	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C343	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C344	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C345	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C346	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C347	1-115-156-11	s	CAPACITOR,CERAMIC 1MF/10V(1608
C348	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C349	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C350	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C351	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C352	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C354	1-164-346-11	s	CAPACITOR CHIP CERAMIC 1MF/16V
C355	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C356	1-135-259-11	s	CAPACITOR,TANTALUM 10MF/6.3V
C357	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C358	1-162-915-11	s	CAPACITOR,CERAMIC 10PF/50V CH
C359	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C360	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C361	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C362	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C363	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C364	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C365	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C366	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C367	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C368	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C369	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C370	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C371	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C372	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C373	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C374	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C375	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C376	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C377	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C378	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C379	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C380	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C384	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C385	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C401	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C402	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C403	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C404	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C405	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C406	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C407	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C408	1-104-913-11	s	CAPACITOR,TANTALUM 10MF/16V
C409	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C410	1-104-913-11	s	CAPACITOR,TANTALUM 10MF/16V

(SDI-31 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C411	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C412	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C413	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C414	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C415	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C416	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C417	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C418	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C419	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C420	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C421	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C422	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C423	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C424	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C425	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C426	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C427	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C428	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C429	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C430	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C431	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C432	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C433	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C434	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C435	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C436	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C437	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C438	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C439	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C440	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C441	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C442	1-162-915-11	s	CAPACITOR,CERAMIC 10PF/50V CH
C443	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C444	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C445	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C446	1-162-915-11	s	CAPACITOR,CERAMIC 10PF/50V CH
C447	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C448	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C449	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C451	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C453	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C457	1-104-919-11	s	CAPACITOR,TANTALUM 10MF/25V
C459	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C460	1-104-919-11	s	CAPACITOR,TANTALUM 10MF/25V
C461	1-109-982-11	s	CAPACITOR,CHIP CERAMIC 1MF/10V
C462	1-109-982-11	s	CAPACITOR,CHIP CERAMIC 1MF/10V
C463	1-104-919-11	s	CAPACITOR,TANTALUM 10MF/25V
C464	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C465	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C468	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C469	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C470	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C471	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C472	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C473	1-104-913-11	s	CAPACITOR,TANTALUM 10MF/16V
C474	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C475	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C476	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C477	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C478	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F

(SDI-31 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C479	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C480	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C481	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C482	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C484	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C486	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C487	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C488	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C489	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C490	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C491	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C492	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C493	1-162-915-11	s	CAPACITOR,CERAMIC 10PF/50V CH
C494	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C496	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C498	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C501	1-104-919-11	s	CAPACITOR,TANTALUM 10MF/25V
C503	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C504	1-109-982-11	s	CAPACITOR,CHIP CERAMIC 1MF/10V
C505	1-109-982-11	s	CAPACITOR,CHIP CERAMIC 1MF/10V
C506	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C507	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C511	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C512	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C513	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C514	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C515	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C516	1-115-156-11	s	CAPACITOR,CERAMIC 1MF/10V(1608
C517	1-115-156-11	s	CAPACITOR,CERAMIC 1MF/10V(1608
C518	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C519	1-126-391-11	s	CAPACITOR ELECT 47MF/6.3V(105)
C520	1-115-416-11	s	CAPACITOR,CERAMIC 1000PF/25V
C521	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C522	1-126-391-11	s	CAPACITOR ELECT 47MF/6.3V(105)
C526	1-131-345-00	s	CAPACITOR,TANTALUME 0.47MF/35V
C601	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C602	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C603	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C604	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C605	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C606	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C607	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C608	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C609	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C610	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C611	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C613	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C614	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C615	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C616	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C617	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C618	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C619	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C620	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C621	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C622	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C623	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C624	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C625	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C626	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F

(SDI-31 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C627	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C628	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C629	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C630	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C631	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C632	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C633	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C634	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C635	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C636	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C637	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C638	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C639	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C640	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C641	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C642	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C643	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C644	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C645	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C646	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
CN201	1-764-243-11	o	CONNECTOR (COAXIAL)
CN202	1-764-243-11	o	CONNECTOR (COAXIAL)
CN203	1-764-243-11	o	CONNECTOR (COAXIAL)
CN205	1-764-243-11	o	CONNECTOR (COAXIAL)
CN207	1-764-243-11	o	CONNECTOR (COAXIAL)
CN401	1-764-243-11	o	CONNECTOR (COAXIAL)
CN402	1-764-243-11	o	CONNECTOR (COAXIAL)
CN403	1-764-243-11	o	CONNECTOR (COAXIAL)
CN404	1-764-243-11	o	CONNECTOR (COAXIAL)
CN405	1-764-243-11	o	CONNECTOR (COAXIAL)
CN406	1-764-243-11	o	CONNECTOR (COAXIAL)
CN407	1-764-243-11	o	CONNECTOR (COAXIAL)
D1	8-719-063-83	s	LED SML-510MWT86
D2	8-719-063-83	s	LED SML-510MWT86
D3	8-719-063-83	s	LED SML-510MWT86
D4	8-719-157-23	s	DIODE RD4.7M-B
D5	8-719-157-23	s	DIODE RD4.7M-B
D6	8-719-157-23	s	DIODE RD4.7M-B
D501	8-719-024-81	s	DIODE 1SS300-TE85L
FB202	1-469-094-11	s	FERRITE, EMI (SMD)
FB203	1-469-094-11	s	FERRITE, EMI (SMD)
FB206	1-469-094-11	s	FERRITE, EMI (SMD)
FB207	1-469-094-11	s	FERRITE, EMI (SMD)
FB209	1-469-094-11	s	FERRITE, EMI (SMD)
FB210	1-469-094-11	s	FERRITE, EMI (SMD)
FB212	1-469-094-11	s	FERRITE, EMI (SMD)
FB213	1-469-094-11	s	FERRITE, EMI (SMD)
FB216	1-469-094-11	s	FERRITE, EMI (SMD)
FB217	1-469-094-11	s	FERRITE, EMI (SMD)
FB219	1-469-094-11	s	FERRITE, EMI (SMD)
FB220	1-469-094-11	s	FERRITE, EMI (SMD)
FB224	1-469-094-11	s	FERRITE, EMI (SMD)
FB225	1-469-094-11	s	FERRITE, EMI (SMD)
FB227	1-469-094-11	s	FERRITE, EMI (SMD)
FB402	1-469-094-11	s	FERRITE, EMI (SMD)
FB404	1-469-094-11	s	FERRITE, EMI (SMD)
FB405	1-469-094-11	s	FERRITE, EMI (SMD)
FB406	1-469-094-11	s	FERRITE, EMI (SMD)

(SDI-31 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
FB407	1-469-094-11	s	FERRITE, EMI (SMD)
FB408	1-469-094-11	s	FERRITE, EMI (SMD)
FB410	1-469-094-11	s	FERRITE, EMI (SMD)
FB411	1-469-094-11	s	FERRITE, EMI (SMD)
FB412	1-469-094-11	s	FERRITE, EMI (SMD)
FB413	1-469-094-11	s	FERRITE, EMI (SMD)
IC1	8-759-669-45	s	IC TL062CPWR-12
IC2	8-759-669-45	s	IC TL062CPWR-12
IC3	8-759-185-42	s	IC LM4040AIM3-2.5
IC4	8-759-710-88	s	IC NJM431U
IC5	8-759-662-35	s	IC 74VHCT04MTCX
IC6 *1	8-759-562-40	s	IC CAT24WC02J-TE13
IC6 *2	8-759-678-06	s	IC CAT24WC02JI-TE13
IC7	8-759-561-69	s	IC PCF8574TS-T
IC8	8-759-973-71	s	IC TL7705CPS-B
IC201	8-752-078-34	s	IC CXB1342R
IC202	8-752-078-34	s	IC CXB1342R
IC203	8-759-549-20	s	IC SN74LV541APWR
IC204	8-759-549-20	s	IC SN74LV541APWR
IC205	8-759-549-20	s	IC SN74LV541APWR
IC206	8-759-549-20	s	IC SN74LV541APWR
IC207	8-752-078-34	s	IC CXB1342R
IC208	8-752-078-34	s	IC CXB1342R
IC209	8-759-549-20	s	IC SN74LV541APWR
IC210	8-759-549-20	s	IC SN74LV541APWR
IC211	8-759-549-20	s	IC SN74LV541APWR
IC212	8-759-549-20	s	IC SN74LV541APWR
IC213	8-752-078-34	s	IC CXB1342R
IC214	8-759-662-39	s	IC 74VHCT245AMTCX
IC215	8-759-561-69	s	IC PCF8574TS-T
IC217	8-759-549-20	s	IC SN74LV541APWR
IC218	8-759-549-20	s	IC SN74LV541APWR
IC401	8-759-472-59	s	IC 74VHC541MTCX
IC402	8-759-472-59	s	IC 74VHC541MTCX
IC403	8-759-472-59	s	IC 74VHC541MTCX
IC404	8-759-472-59	s	IC 74VHC541MTCX
IC405	8-759-472-59	s	IC 74VHC541MTCX
IC406	8-752-078-32	s	IC CXB1341R
IC407	8-752-078-32	s	IC CXB1341R
IC409	8-752-078-32	s	IC CXB1341R
IC411	8-759-637-57	s	IC CLC450AJM5
IC601	8-759-472-59	s	IC 74VHC541MTCX
IC602	8-759-472-59	s	IC 74VHC541MTCX
IC603	8-759-472-59	s	IC 74VHC541MTCX
IC604	8-759-472-59	s	IC 74VHC541MTCX
IC605	8-759-472-59	s	IC 74VHC541MTCX
IC606	8-759-472-59	s	IC 74VHC541MTCX
IC607	8-759-472-18	s	IC 74VHC138MTCX
IC608	8-759-472-59	s	IC 74VHC541MTCX
IC609	8-759-472-59	s	IC 74VHC541MTCX
IC610	8-759-472-59	s	IC 74VHC541MTCX
IC611	8-759-472-59	s	IC 74VHC541MTCX
IC613	8-759-472-59	s	IC 74VHC541MTCX
IC614	8-759-472-59	s	IC 74VHC541MTCX
IC617	8-759-472-59	s	IC 74VHC541MTCX
IC618	8-759-472-59	s	IC 74VHC541MTCX
IC619	8-759-472-59	s	IC 74VHC541MTCX
IC620	8-759-472-59	s	IC 74VHC541MTCX
IC621	8-759-472-59	s	IC 74VHC541MTCX

(SDI-31 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC622	8-759-472-59	s	IC 74VHC541MTCX
IC623	8-759-472-59	s	IC 74VHC541MTCX
IC624	8-759-472-59	s	IC 74VHC541MTCX
IC625	8-759-472-18	s	IC 74VHC138MTCX
IC626	8-759-472-59	s	IC 74VHC541MTCX
IC627	8-759-472-59	s	IC 74VHC541MTCX
IC628	8-759-472-59	s	IC 74VHC541MTCX
IC629	8-759-472-59	s	IC 74VHC541MTCX
IC637	8-759-271-86	s	IC TC7SH04FU
IC642	8-759-561-69	s	IC PCF8574TS-T
IC643	8-759-561-69	s	IC PCF8574TS-T
IC644	8-759-196-96	s	IC TC7SH08FU (TE85R)
L1	1-414-529-21	s	INDUCTOR (POWER)
L2	1-414-529-21	s	INDUCTOR (POWER)
L3	1-414-529-21	s	INDUCTOR (POWER)
L4	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L5	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L6	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L7	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L8	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L201	1-410-797-11	s	CHIP INDUCTOR 0.015UH (3225)
L202	1-410-797-11	s	CHIP INDUCTOR 0.015UH (3225)
L203	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L204	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L209	1-410-797-11	s	CHIP INDUCTOR 0.015UH (3225)
L210	1-410-797-11	s	CHIP INDUCTOR 0.015UH (3225)
L211	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L212	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L217	1-410-797-11	s	CHIP INDUCTOR 0.015UH (3225)
L218	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L221	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L402	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L403	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L408	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L410	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L411	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L623	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L624	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
Q1	8-729-113-13	s	TRANSISTOR FA1A4M-L33
Q2	8-729-807-51	s	TRANSISTOR 2SD1623-S
Q3	8-729-113-13	s	TRANSISTOR FA1A4M-L33
Q5	8-729-106-68	s	TRANSISTOR 2SD1615A-GP
Q6	8-729-120-28	s	TRANSISTOR 2SC1623-L5L6
Q7	8-729-120-28	s	TRANSISTOR 2SC1623-L5L6
Q403	8-729-105-68	s	TRANSISTOR 2SC3356-K
Q404	8-729-105-68	s	TRANSISTOR 2SC3356-K
Q405	8-729-105-68	s	TRANSISTOR 2SC3356-K
Q406	8-729-105-68	s	TRANSISTOR 2SC3356-K
Q410	8-729-105-68	s	TRANSISTOR 2SC3356-K
Q411	8-729-105-68	s	TRANSISTOR 2SC3356-K
Q412	8-729-105-68	s	TRANSISTOR 2SC3356-K
Q413	8-729-105-68	s	TRANSISTOR 2SC3356-K
Q414	8-729-120-28	s	TRANSISTOR 2SC1623-L5L6
Q415	8-729-120-28	s	TRANSISTOR 2SC1623-L5L6
Q416	8-729-120-28	s	TRANSISTOR 2SC1623-L5L6
Q417	8-729-122-63	s	TRANSISTOR 2SA1226-E4
R1	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608

(SDI-31 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R2	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R3	1-216-823-11	s	RESISTOR, CHIP 1.5K 1/16W
R4	1-216-041-00	s	RESISTOR, CHIP 470 1/10W(2012)
R5	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R7	1-216-813-11	s	RESISTOR, CHIP 220 1/16W 1608
R9	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R10	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R11	1-218-717-11	s	RESISTOR,CHIP 11K 1/16W (1608)
R12	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R13	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R15	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R16	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R17	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R18	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R19	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R20	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R21	1-220-259-11	s	RESISTOR, CHIP 150 1/4W (3225)
R22	1-216-017-91	s	RESISTOR, CHIP 47 1/10W(2012)
R23	1-218-697-11	s	RESISTOR,CHIP 1.6K 1/16W(1608)
R24	1-218-709-11	s	RESISTOR,CHIP 5.1K 1/16W
R25	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R26	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R27	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R32	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R33	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R34	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R35	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R36	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R37	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R38	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R39	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R42	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R43	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R44	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R45	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R46	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R47	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R56	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R59	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R61	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R62	1-249-429-11	s	RESISTOR,CARBON(SMALL)10K 1/4W
R63	1-249-429-11	s	RESISTOR,CARBON(SMALL)10K 1/4W
R201	1-218-665-11	s	RESISTOR,CHIP 75 1/16W (1608)
R202	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R203	1-218-665-11	s	RESISTOR,CHIP 75 1/16W (1608)
R204	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R207	1-218-678-11	s	RESISTOR CHIP 270 1/16W (1608)
R208	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R209	1-218-678-11	s	RESISTOR CHIP 270 1/16W (1608)
R210	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R213	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R214	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R215	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R216	1-218-713-11	s	RESISTOR,METAL 7.5K 1/16W
R217	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R218	1-218-285-11	s	RESISTOR,CHIP 75 1/16W (1608)
R219	1-218-285-11	s	RESISTOR,CHIP 75 1/16W (1608)
R220	1-218-713-11	s	RESISTOR,METAL 7.5K 1/16W
R221	1-218-285-11	s	RESISTOR,CHIP 75 1/16W (1608)

(SDI-31 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R222	1-218-285-11	s	RESISTOR,CHIP 75 1/16W (1608)
R223	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R224	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R225	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R226	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R227	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R228	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R229	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R230	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R231	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R232	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R233	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R234	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R235	1-216-826-11	s	RESISTOR,CHIP 2.7K 1/16W(1608)
R236	1-216-826-11	s	RESISTOR,CHIP 2.7K 1/16W(1608)
R237	1-216-826-11	s	RESISTOR,CHIP 2.7K 1/16W(1608)
R238	1-216-826-11	s	RESISTOR,CHIP 2.7K 1/16W(1608)
R239	1-216-826-11	s	RESISTOR,CHIP 2.7K 1/16W(1608)
R240	1-216-826-11	s	RESISTOR,CHIP 2.7K 1/16W(1608)
R253	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R255	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R257	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R258	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R259	1-218-665-11	s	RESISTOR,CHIP 75 1/16W (1608)
R260	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R261	1-218-665-11	s	RESISTOR,CHIP 75 1/16W (1608)
R262	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R265	1-218-678-11	s	RESISTOR CHIP 270 1/16W (1608)
R266	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R267	1-218-678-11	s	RESISTOR CHIP 270 1/16W (1608)
R268	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R271	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R272	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R273	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R274	1-218-713-11	s	RESISTOR,METAL 7.5K 1/16W
R275	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R276	1-218-285-11	s	RESISTOR,CHIP 75 1/16W (1608)
R277	1-218-285-11	s	RESISTOR,CHIP 75 1/16W (1608)
R278	1-218-713-11	s	RESISTOR,METAL 7.5K 1/16W
R279	1-218-285-11	s	RESISTOR,CHIP 75 1/16W (1608)
R280	1-218-285-11	s	RESISTOR,CHIP 75 1/16W (1608)
R281	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R282	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R283	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R284	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R285	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R286	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R287	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R288	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R289	1-216-826-11	s	RESISTOR,CHIP 2.7K 1/16W(1608)
R290	1-216-826-11	s	RESISTOR,CHIP 2.7K 1/16W(1608)
R291	1-216-826-11	s	RESISTOR,CHIP 2.7K 1/16W(1608)
R292	1-216-826-11	s	RESISTOR,CHIP 2.7K 1/16W(1608)
R293	1-216-826-11	s	RESISTOR,CHIP 2.7K 1/16W(1608)
R294	1-216-826-11	s	RESISTOR,CHIP 2.7K 1/16W(1608)
R310	1-218-680-11	s	RESISTOR,CHIP 330 1/16W(1608)
R313	1-218-680-11	s	RESISTOR,CHIP 330 1/16W(1608)
R330	1-218-680-11	s	RESISTOR,CHIP 330 1/16W(1608)
R331	1-218-680-11	s	RESISTOR,CHIP 330 1/16W(1608)

(SDI-31 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R339	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R340	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R341	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R342	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R343	1-218-665-11	s	RESISTOR,CHIP 75 1/16W (1608)
R344	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R346	1-218-678-11	s	RESISTOR CHIP 270 1/16W (1608)
R347	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R349	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R350	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R351	1-218-713-11	s	RESISTOR,METAL 7.5K 1/16W
R352	1-218-285-11	s	RESISTOR,CHIP 75 1/16W (1608)
R353	1-218-285-11	s	RESISTOR,CHIP 75 1/16W (1608)
R354	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R355	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R356	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R357	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R358	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R359	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R360	1-216-826-11	s	RESISTOR,CHIP 2.7K 1/16W(1608)
R361	1-216-826-11	s	RESISTOR,CHIP 2.7K 1/16W(1608)
R362	1-216-826-11	s	RESISTOR,CHIP 2.7K 1/16W(1608)
R363	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R364	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R365	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R366	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R367	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R380	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R382	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R401	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R402	1-218-720-11	s	RESISTOR,CHIP 15K 1/16W(1608)
R403	1-218-720-11	s	RESISTOR,CHIP 15K 1/16W(1608)
R404	1-218-720-11	s	RESISTOR,CHIP 15K 1/16W(1608)
R405	1-218-720-11	s	RESISTOR,CHIP 15K 1/16W(1608)
R406	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R407	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R408	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R409	1-216-824-11	s	RESISTOR, CHIP 1.8K 1/16W 1608
R410	1-218-696-11	s	RESISTOR,CHIP 1.5K 1/16W(1608)
R411	1-216-824-11	s	RESISTOR, CHIP 1.8K 1/16W 1608
R412	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R413	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R414	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R415	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R416	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R417	1-216-824-11	s	RESISTOR, CHIP 1.8K 1/16W 1608
R418	1-218-696-11	s	RESISTOR,CHIP 1.5K 1/16W(1608)
R419	1-216-824-11	s	RESISTOR, CHIP 1.8K 1/16W 1608
R420	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R421	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R422	1-218-713-11	s	RESISTOR,METAL 7.5K 1/16W
R424	1-218-713-11	s	RESISTOR,METAL 7.5K 1/16W
R425	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R427	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R428	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R429	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R431	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R433	1-216-807-11	s	RESISTOR, CHIP 68 1/16W 1608
R434	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)

(SDI-31 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R435	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R436	1-216-807-11	s	RESISTOR, CHIP 68 1/16W 1608
R437	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R442	1-218-654-11	s	RESISTOR CHIP 27 1/16W (1608)
R443	1-218-654-11	s	RESISTOR CHIP 27 1/16W (1608)
R444	1-218-680-11	s	RESISTOR,CHIP 330 1/16W(1608)
R451	1-218-680-11	s	RESISTOR,CHIP 330 1/16W(1608)
R453	1-218-680-11	s	RESISTOR,CHIP 330 1/16W(1608)
R455	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R456	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R457	1-218-665-11	s	RESISTOR,CHIP 75 1/16W (1608)
R458	1-218-652-11	s	RESISTOR,CHIP 22 1/16W (1608)
R459	1-218-665-11	s	RESISTOR,CHIP 75 1/16W (1608)
R460	1-218-652-11	s	RESISTOR,CHIP 22 1/16W (1608)
R461	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R462	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R463	1-218-684-11	s	RESISTOR,CHIP 470 1/16W (1608)
R465	1-218-652-11	s	RESISTOR,CHIP 22 1/16W (1608)
R466	1-218-652-11	s	RESISTOR,CHIP 22 1/16W (1608)
R467	1-218-652-11	s	RESISTOR,CHIP 22 1/16W (1608)
R468	1-218-665-11	s	RESISTOR,CHIP 75 1/16W (1608)
R469	1-218-652-11	s	RESISTOR,CHIP 22 1/16W (1608)
R470	1-218-665-11	s	RESISTOR,CHIP 75 1/16W (1608)
R471	1-218-652-11	s	RESISTOR,CHIP 22 1/16W (1608)
R472	1-218-665-11	s	RESISTOR,CHIP 75 1/16W (1608)
R473	1-218-665-11	s	RESISTOR,CHIP 75 1/16W (1608)
R474	1-218-680-11	s	RESISTOR,CHIP 330 1/16W(1608)
R475	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R476	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R477	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R478	1-218-684-11	s	RESISTOR,CHIP 470 1/16W (1608)
R479	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R480	1-218-720-11	s	RESISTOR,CHIP 15K 1/16W(1608)
R481	1-218-720-11	s	RESISTOR,CHIP 15K 1/16W(1608)
R486	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R487	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R488	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R489	1-216-824-11	s	RESISTOR, CHIP 1.8K 1/16W 1608
R490	1-218-696-11	s	RESISTOR,CHIP 1.5K 1/16W(1608)
R491	1-216-824-11	s	RESISTOR, CHIP 1.8K 1/16W 1608
R492	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R493	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R494	1-218-713-11	s	RESISTOR,METAL 7.5K 1/16W
R496	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R499	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R501	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R502	1-216-807-11	s	RESISTOR, CHIP 68 1/16W 1608
R503	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R508	1-218-680-11	s	RESISTOR,CHIP 330 1/16W(1608)
R513	1-218-680-11	s	RESISTOR,CHIP 330 1/16W(1608)
R516	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R517	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R518	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R520	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R521	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R522	1-218-652-11	s	RESISTOR,CHIP 22 1/16W (1608)
R523	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R524	1-218-665-11	s	RESISTOR,CHIP 75 1/16W (1608)
R525	1-218-665-11	s	RESISTOR,CHIP 75 1/16W (1608)

(SDI-31 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R528	1-218-684-11	s	RESISTOR,CHIP 470 1/16W (1608)
R533	1-218-665-11	s	RESISTOR,CHIP 75 1/16W (1608)
R534	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R535	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R536	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R538	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R539	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R540	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R541	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R542	1-218-654-11	s	RESISTOR CHIP 27 1/16W (1608)
R543	1-218-654-11	s	RESISTOR CHIP 27 1/16W (1608)
R544	1-218-676-11	s	RESISTOR,CHIP 220 1/16W(1608)
R545	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R546	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R547	1-218-708-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R548	1-218-652-11	s	RESISTOR,CHIP 22 1/16W (1608)
R549	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R550	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R551	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R552	1-218-676-11	s	RESISTOR,CHIP 220 1/16W(1608)
R553	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R554	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R555	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R556	1-218-698-11	s	RESISTOR,CHIP 1.8K 1/16W(1608)
R557	1-218-704-11	s	RESISTOR,CHIP 3.3K 1/16W(1608)
R558	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R559	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R560	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R561	1-218-678-11	s	RESISTOR CHIP 270 1/16W (1608)
R562	1-218-684-11	s	RESISTOR,CHIP 470 1/16W (1608)
R601	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R602	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R603	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R604	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R605	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R607	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R608	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R609	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R610	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R611	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R612	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R613	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R614	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R615	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R616	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R617	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R618	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R619	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R620	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R621	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R622	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R623	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R624	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R625	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R626	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R627	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R628	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R631	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R632	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608

(SDI-31 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R633	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R634	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R635	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R636	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R637	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R638	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R639	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R640	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R641	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R642	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R643	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R644	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
RB201	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB202	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB203	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB204	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB205	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB206	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB207	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB208	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB209	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB210	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB211	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB212	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB213	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB214	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB215	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB401	1-233-936-11	s	RESISTOR,NETWORK 10 (1608)
RB402	1-233-936-11	s	RESISTOR,NETWORK 10 (1608)
RB403	1-233-936-11	s	RESISTOR,NETWORK 10 (1608)
RB404	1-233-936-11	s	RESISTOR,NETWORK 10 (1608)
RB405	1-233-936-11	s	RESISTOR,NETWORK 10 (1608)
RB406	1-233-936-11	s	RESISTOR,NETWORK 10 (1608)
RB407	1-233-936-11	s	RESISTOR,NETWORK 10 (1608)
RB408	1-233-936-11	s	RESISTOR,NETWORK 10 (1608)
RB409	1-233-936-11	s	RESISTOR,NETWORK 10 (1608)
RB410	1-239-419-11	s	NETWORK RESISTOR 470 (1608)
RB411	1-239-419-11	s	NETWORK RESISTOR 470 (1608)
RB412	1-239-419-11	s	NETWORK RESISTOR 470 (1608)
RB413	1-239-419-11	s	NETWORK RESISTOR 470 (1608)
RB414	1-239-419-11	s	NETWORK RESISTOR 470 (1608)
RB415	1-239-419-11	s	NETWORK RESISTOR 470 (1608)
RB416	1-239-419-11	s	NETWORK RESISTOR 470 (1608)
RB417	1-239-419-11	s	NETWORK RESISTOR 470 (1608)
RB418	1-239-419-11	s	NETWORK RESISTOR 470 (1608)
RB419	1-239-309-11	s	RESISTOR ARRAY,CHIP 100K
RB607	1-233-936-11	s	RESISTOR,NETWORK 10 (1608)
RB608	1-233-936-11	s	RESISTOR,NETWORK 10 (1608)
RB609	1-233-936-11	s	RESISTOR,NETWORK 10 (1608)
RB610	1-233-936-11	s	RESISTOR,NETWORK 10 (1608)
RB611	1-233-936-11	s	RESISTOR,NETWORK 10 (1608)
RB612	1-233-936-11	s	RESISTOR,NETWORK 10 (1608)
RB613	1-233-936-11	s	RESISTOR,NETWORK 10 (1608)
RB614	1-233-936-11	s	RESISTOR,NETWORK 10 (1608)
RB615	1-233-936-11	s	RESISTOR,NETWORK 10 (1608)
RV201	1-237-034-11	s	RESISTOR,ADJ,CERMET 2K
RV202	1-237-034-11	s	RESISTOR,ADJ,CERMET 2K
RV203	1-237-034-11	s	RESISTOR,ADJ,CERMET 2K

(SDI-31 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RV204	1-237-034-11	s	RESISTOR,ADJ,CERMET 2K
RV205	1-237-034-11	s	RESISTOR,ADJ,CERMET 2K
RV401	1-237-034-11	s	RESISTOR,ADJ,CERMET 2K
RV402	1-237-034-11	s	RESISTOR,ADJ,CERMET 2K
RV403	1-237-034-11	s	RESISTOR,ADJ,CERMET 2K
S1	1-692-271-31	s	SWITCH, SLIDE
THP1	⚠ 1-810-792-11	s	THERMISTOR, POSITIVE
THP2	⚠ 1-810-792-11	s	THERMISTOR, POSITIVE
THP3	⚠ 1-803-150-11	s	THERMISTOR, POSITIVE

TX-63 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	⚠ A-8327-703-A	o	TX-63 ASSY

DIF-38 BOARD (BKP-9330)
---

*1: Serial No. 10058 and higher

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8327-226-A	o	MOUNTED CIRCUIT BOARD, DIF-38
1pc	3-627-223-01	o	REAR PC BOARD LID,UPPER
1pc	3-627-224-01	o	PEAR PC BOARD LID,LOWER
1pc	3-627-225-01	o	SPRING,SHIELD
4pcs	7-621-775-08	s	SCREW +B2.6X3
14pcs	7-627-556-37	s	SCREW,PRECISION +P2.6X4 TYPE 1
4pcs	1-784-240-11	s	CONVERTER, COAXIAL CONNECTOR
4pcs	1-783-252-11	s	CABLE ASSEMBLY, COAXIAL
1pc	3-628-831-01	o	PC BOARD PANEL,DIF-38
6pcs	7-682-947-01	s	SCREW +PSW 3X6
C101	1-126-391-11	s	CAPACITOR ELECT 47MF/6.3V(105)
C102	1-126-391-11	s	CAPACITOR ELECT 47MF/6.3V(105)
C103	1-126-391-11	s	CAPACITOR ELECT 47MF/6.3V(105)
C104	1-126-391-11	s	CAPACITOR ELECT 47MF/6.3V(105)
C105	1-162-968-11	s	CAPACITOR,CERAMIC 4700PF/50V B
C106	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C107	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C108	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C109	1-126-391-11	s	CAPACITOR ELECT 47MF/6.3V(105)
C110	1-126-391-11	s	CAPACITOR ELECT 47MF/6.3V(105)
C111	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C112	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C113	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C114	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C115	1-104-852-11	s	CAPACITOR,TANTALUM 22MF/10V
C201	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C202	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C203	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C204	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C205	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C206	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C301	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C302	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C303	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C304	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C305	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C401	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C402	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C403	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C404	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C405	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C406	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C407	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C408	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C409	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C410	1-162-915-11	s	CAPACITOR,CERAMIC 10PF/50V CH
C411	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C412	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C413	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C414	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C415	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C416	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C417	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C418	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C419	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C420	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F

(DIF-38 BOARD (BKP-9330))

Ref. No. or Q'ty	Part No.	SP	Description
C421	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C422	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C423	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C424	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C425	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C426	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C427	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C428	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C429	1-162-907-11	s	CAPACITOR,CERAMIC 2PF/50V(CK)
C430	1-162-907-11	s	CAPACITOR,CERAMIC 2PF/50V(CK)
C501	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C502	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C503	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C504	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C505	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C506	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C507	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C508	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C509	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C510	1-162-915-11	s	CAPACITOR,CERAMIC 10PF/50V CH
C511	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C512	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C513	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C514	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C515	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C516	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C517	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C518	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C519	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C520	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C521	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C522	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C523	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C524	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C525	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C526	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C527	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C528	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C529	1-162-907-11	s	CAPACITOR,CERAMIC 2PF/50V(CK)
C530	1-162-907-11	s	CAPACITOR,CERAMIC 2PF/50V(CK)
C601	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C602	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C603	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C604	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C605	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C606	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C607	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C608	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C609	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C610	1-162-915-11	s	CAPACITOR,CERAMIC 10PF/50V CH
C611	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C612	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C613	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C614	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C615	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C616	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C617	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C618	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C619	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F

(DIF-38 BOARD (BKP-9330))

Ref. No. or Q'ty	Part No.	SP	Description
C620	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C621	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C622	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C623	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C624	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C625	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C626	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C627	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C628	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C629	1-162-907-11	s	CAPACITOR,CERAMIC 2PF/50V(CK)
C630	1-162-907-11	s	CAPACITOR,CERAMIC 2PF/50V(CK)
C701	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C702	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C703	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C704	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C705	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C706	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C707	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C708	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C709	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C710	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C711	1-162-915-11	s	CAPACITOR,CERAMIC 10PF/50V CH
C712	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C713	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C714	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C715	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C716	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C717	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C718	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C719	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C720	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C721	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C722	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C723	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C724	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C725	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C726	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C727	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C728	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C729	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C730	1-162-907-11	s	CAPACITOR,CERAMIC 2PF/50V(CK)
C731	1-162-907-11	s	CAPACITOR,CERAMIC 2PF/50V(CK)
CN402	1-764-243-11	o	CONNECTOR (COAXIAL)
CN502	1-764-243-11	o	CONNECTOR (COAXIAL)
CN602	1-764-243-11	o	CONNECTOR (COAXIAL)
CN702	1-764-243-11	o	CONNECTOR (COAXIAL)
D101	8-719-157-23	s	DIODE RD4.7M-B
D102	8-719-157-23	s	DIODE RD4.7M-B
FB401	1-412-363-11	s	FERRITE, EMI (SMD)
FB501	1-412-363-11	s	FERRITE, EMI (SMD)
FB601	1-412-363-11	s	FERRITE, EMI (SMD)
FB701	1-412-363-11	s	FERRITE, EMI (SMD)
IC101	8-759-906-53	s	IC TL062CPS
IC102	8-759-185-42	s	IC LM4040AIM3-2.5
IC103	8-759-990-63	s	IC PCF8574AT
IC104	8-759-662-39	s	IC 74VHCT245AMTCX
IC201	8-759-456-24	s	IC 74LCX540MTCX

(DIF-38 BOARD (BKP-9330))

Ref. No. or Q'ty	Part No.	SP	Description
IC202	8-759-386-28	s	IC 74LCX00MTCX
IC203	8-759-386-26	s	IC 74LCX574MTCX
IC204	8-759-386-26	s	IC 74LCX574MTCX
IC205	8-759-386-26	s	IC 74LCX574MTCX
IC206	8-759-386-26	s	IC 74LCX574MTCX
IC301	8-759-456-24	s	IC 74LCX540MTCX
IC302	8-759-386-26	s	IC 74LCX574MTCX
IC303	8-759-386-26	s	IC 74LCX574MTCX
IC304	8-759-386-26	s	IC 74LCX574MTCX
IC305	8-759-386-26	s	IC 74LCX574MTCX
IC401	8-759-386-26	s	IC 74LCX574MTCX
IC402	8-759-386-26	s	IC 74LCX574MTCX
IC403	8-752-078-32	s	IC CXB1341R
IC501	8-759-386-26	s	IC 74LCX574MTCX
IC502	8-759-386-26	s	IC 74LCX574MTCX
IC503	8-752-078-32	s	IC CXB1341R
IC601	8-759-386-26	s	IC 74LCX574MTCX
IC602	8-759-386-26	s	IC 74LCX574MTCX
IC603	8-752-078-32	s	IC CXB1341R
IC701	8-759-466-56	s	IC 74LCX86MTCX
IC702	8-759-386-26	s	IC 74LCX574MTCX
IC703	8-759-386-26	s	IC 74LCX574MTCX
IC704	8-752-078-32	s	IC CXB1341R
JC201	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
JC202	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
JC203	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
JC204	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
JC301	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
JC302	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
JC303	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
JC304	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
JC401	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
JC402	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
JC403	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
JC501	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
JC502	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
JC601	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
JC602	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
JC701	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
JC702	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
JC703	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
L101	1-414-529-21	s	INDUCTOR (POWER)
L102	1-414-529-21	s	INDUCTOR (POWER)
L103	1-414-529-21	s	INDUCTOR (POWER)
L401	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L402	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L501	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L502	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L601	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L602	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L701	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
L702	1-412-030-11	s	INDUCTOR,CHIP 22UH (3225)
Q101	8-729-113-13	s	TRANSISTOR FA1A4M-L33
Q102	8-729-113-13	s	TRANSISTOR FA1A4M-L33
Q401	8-729-105-68	s	TRANSISTOR 2SC3356-K
Q402	8-729-105-68	s	TRANSISTOR 2SC3356-K
Q403	8-729-105-68	s	TRANSISTOR 2SC3356-K

(DIF-38 BOARD (BKP-9330))

Ref. No. or Q'ty	Part No.	SP	Description
Q404	8-729-105-68	s	TRANSISTOR 2SC3356-K
Q405	8-729-105-68	s	TRANSISTOR 2SC3356-K
Q406	8-729-105-68	s	TRANSISTOR 2SC3356-K
Q501	8-729-105-68	s	TRANSISTOR 2SC3356-K
Q502	8-729-105-68	s	TRANSISTOR 2SC3356-K
Q503	8-729-105-68	s	TRANSISTOR 2SC3356-K
Q504	8-729-105-68	s	TRANSISTOR 2SC3356-K
Q505	8-729-105-68	s	TRANSISTOR 2SC3356-K
Q506	8-729-105-68	s	TRANSISTOR 2SC3356-K
Q601	8-729-105-68	s	TRANSISTOR 2SC3356-K
Q602	8-729-105-68	s	TRANSISTOR 2SC3356-K
Q603	8-729-105-68	s	TRANSISTOR 2SC3356-K
Q604	8-729-105-68	s	TRANSISTOR 2SC3356-K
Q605	8-729-105-68	s	TRANSISTOR 2SC3356-K
Q606	8-729-105-68	s	TRANSISTOR 2SC3356-K
Q701	8-729-105-68	s	TRANSISTOR 2SC3356-K
Q702	8-729-105-68	s	TRANSISTOR 2SC3356-K
Q703	8-729-105-68	s	TRANSISTOR 2SC3356-K
Q704	8-729-105-68	s	TRANSISTOR 2SC3356-K
Q705	8-729-105-68	s	TRANSISTOR 2SC3356-K
Q706	8-729-105-68	s	TRANSISTOR 2SC3356-K
R101	1-216-824-11	s	RESISTOR, CHIP 1.8K 1/16W 1608
R102	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R105	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R106	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R107	1-216-827-11	s	RESISTOR, CHIP 3.3K 1/16W 1608
R108	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R109	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R110	1-216-839-11	s	RESISTOR,CHIP 33K 1/16W 1608
R111	1-216-837-11	s	RESISTOR,CHIP 22K 1/16W 1608
R112	1-216-837-11	s	RESISTOR,CHIP 22K 1/16W 1608
R115	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R116	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R117	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R118	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R119	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R120	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R121	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R122	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R123	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R124	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R125	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R126	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R127	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R128	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R129	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R201	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R202	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R203	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R204	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R205	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R206	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R207	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R208	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R209	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R210	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R211	*1 1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R212	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608

(DIF-38 BOARD (BKP-9330))

Ref. No. or Q'ty	Part No.	SP	Description
R213	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R214	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R215	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R216	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R301	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R302	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R303	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R304	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R305	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R306	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R307	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R308	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R309	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R310	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R311	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R312	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R313	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R314	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R401	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R402	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R403	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R404	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R405	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R406	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R407	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R408	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R409	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R410	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R411	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R412	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R413	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R414	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R415	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R417	1-216-837-11	s	RESISTOR,CHIP 22K 1/16W 1608
R418	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R419	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R420	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R421	1-216-823-11	s	RESISTOR, CHIP 1.5K 1/16W
R422	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R423	1-218-694-11	s	RESISTOR,CHIP 1.2K1/16W(1608)
R424	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R425	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R426	1-216-834-11	s	RESISTOR,CHIP 12K 1/16W 1608
R427	1-218-676-11	s	RESISTOR,CHIP 220 1/16W(1608)
R428	1-218-684-11	s	RESISTOR,CHIP 470 1/16W (1608)
R429	1-218-676-11	s	RESISTOR,CHIP 220 1/16W(1608)
R430	1-218-666-11	s	RESISTOR,CHIP 82 1/16W (1608)
R431	1-218-655-91	s	RESISTOR,CHIP 30 1/16W(1608)
R432	1-218-666-11	s	RESISTOR,CHIP 82 1/16W (1608)
R433	1-218-655-91	s	RESISTOR,CHIP 30 1/16W(1608)
R434	1-218-644-11	s	RESISTOR,CHIP 10 1/16W
R435	1-218-672-11	s	RESISTOR,CHIP 150 1/16W(1608)
R436	1-218-672-11	s	RESISTOR,CHIP 150 1/16W(1608)
R437	1-218-664-11	s	RESISTOR,CHIP 68 1/16W (1608)
R438	1-218-664-11	s	RESISTOR,CHIP 68 1/16W (1608)
R439	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R440	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R501	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R502	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)

(DIF-38 BOARD (BKP-9330))

Ref. No. or Q'ty	Part No.	SP	Description
R503	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R504	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R505	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R506	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R507	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R508	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R509	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R510	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R511	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R512	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R513	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R515	1-216-837-11	s	RESISTOR,CHIP 22K 1/16W 1608
R516	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R517	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R518	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R519	1-216-823-11	s	RESISTOR, CHIP 1.5K 1/16W
R520	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R521	1-218-694-11	s	RESISTOR,CHIP 1.2K1/16W(1608)
R522	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R523	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R524	1-216-834-11	s	RESISTOR,CHIP 12K 1/16W 1608
R525	1-218-676-11	s	RESISTOR,CHIP 220 1/16W(1608)
R526	1-218-684-11	s	RESISTOR,CHIP 470 1/16W (1608)
R527	1-218-676-11	s	RESISTOR,CHIP 220 1/16W(1608)
R528	1-218-666-11	s	RESISTOR,CHIP 82 1/16W (1608)
R529	1-218-655-91	s	RESISTOR,CHIP 30 1/16W(1608)
R530	1-218-666-11	s	RESISTOR,CHIP 82 1/16W (1608)
R531	1-218-655-91	s	RESISTOR,CHIP 30 1/16W(1608)
R532	1-218-644-11	s	RESISTOR,CHIP 10 1/16W
R533	1-218-672-11	s	RESISTOR,CHIP 150 1/16W(1608)
R534	1-218-672-11	s	RESISTOR,CHIP 150 1/16W(1608)
R535	1-218-664-11	s	RESISTOR,CHIP 68 1/16W (1608)
R536	1-218-664-11	s	RESISTOR,CHIP 68 1/16W (1608)
R537	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R538	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R601	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R602	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R603	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R604	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R605	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R606	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R607	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R608	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R609	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R610	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R611	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R612	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R613	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R614	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R615	1-216-837-11	s	RESISTOR,CHIP 22K 1/16W 1608
R616	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R617	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R618	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R619	1-216-823-11	s	RESISTOR, CHIP 1.5K 1/16W
R620	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R621	1-218-694-11	s	RESISTOR,CHIP 1.2K1/16W(1608)
R622	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R623	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R624	1-216-834-11	s	RESISTOR,CHIP 12K 1/16W 1608

(DIF-38 BOARD (BKP-9330))

Ref. No. or Q'ty	Part No.	SP	Description
R625	1-218-676-11	s	RESISTOR,CHIP 220 1/16W(1608)
R626	1-218-684-11	s	RESISTOR,CHIP 470 1/16W (1608)
R627	1-218-676-11	s	RESISTOR,CHIP 220 1/16W(1608)
R628	1-218-666-11	s	RESISTOR,CHIP 82 1/16W (1608)
R629	1-218-655-91	s	RESISTOR,CHIP 30 1/16W(1608)
R630	1-218-666-11	s	RESISTOR,CHIP 82 1/16W (1608)
R631	1-218-655-91	s	RESISTOR,CHIP 30 1/16W(1608)
R632	1-218-644-11	s	RESISTOR,CHIP 10 1/16W
R633	1-218-672-11	s	RESISTOR,CHIP 150 1/16W(1608)
R634	1-218-672-11	s	RESISTOR,CHIP 150 1/16W(1608)
R635	1-218-664-11	s	RESISTOR,CHIP 68 1/16W (1608)
R636	1-218-664-11	s	RESISTOR,CHIP 68 1/16W (1608)
R637	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R638	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
*1 R701	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R702	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R703	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R704	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R705	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R706	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R707	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R708	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R709	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R710	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R711	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R712	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R713	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R714	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R715	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R716	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R717	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R718	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R720	1-216-837-11	s	RESISTOR,CHIP 22K 1/16W 1608
R721	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R722	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R723	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R724	1-216-823-11	s	RESISTOR, CHIP 1.5K 1/16W
R725	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R726	1-218-694-11	s	RESISTOR,CHIP 1.2K1/16W(1608)
R727	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R728	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R729	1-216-834-11	s	RESISTOR,CHIP 12K 1/16W 1608
R730	1-218-676-11	s	RESISTOR,CHIP 220 1/16W(1608)
R731	1-218-684-11	s	RESISTOR,CHIP 470 1/16W (1608)
R732	1-218-676-11	s	RESISTOR,CHIP 220 1/16W(1608)
R733	1-218-666-11	s	RESISTOR,CHIP 82 1/16W (1608)
R734	1-218-655-91	s	RESISTOR,CHIP 30 1/16W(1608)
R735	1-218-666-11	s	RESISTOR,CHIP 82 1/16W (1608)
R736	1-218-655-91	s	RESISTOR,CHIP 30 1/16W(1608)
R737	1-218-644-11	s	RESISTOR,CHIP 10 1/16W
R738	1-218-672-11	s	RESISTOR,CHIP 150 1/16W(1608)
R739	1-218-672-11	s	RESISTOR,CHIP 150 1/16W(1608)
R740	1-218-664-11	s	RESISTOR,CHIP 68 1/16W (1608)
R741	1-218-664-11	s	RESISTOR,CHIP 68 1/16W (1608)
R742	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R743	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
RB201	1-239-309-11	s	RESISTOR ARRAY,CHIP 100K
RB202	1-239-309-11	s	RESISTOR ARRAY,CHIP 100K

(DIF-38 BOARD (BKP-9330))

Ref. No. or Q'ty	Part No.	SP	Description
RB203	1-239-309-11	s	RESISTOR ARRAY,CHIP 100K
RB204	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB205	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB206	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB207	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB208	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB209	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB210	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB211	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB212	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB301	1-239-309-11	s	RESISTOR ARRAY,CHIP 100K
RB302	1-239-309-11	s	RESISTOR ARRAY,CHIP 100K
RB303	1-239-309-11	s	RESISTOR ARRAY,CHIP 100K
RB304	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB305	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB306	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB307	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB308	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB309	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB310	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB311	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB312	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB701	1-239-309-11	s	RESISTOR ARRAY,CHIP 100K
RB702	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB703	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB704	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RV401	1-237-034-11	s	RESISTOR,ADJ,CERMET 2K
RV501	1-237-034-11	s	RESISTOR,ADJ,CERMET 2K
RV601	1-237-034-11	s	RESISTOR,ADJ,CERMET 2K
RV701	1-237-034-11	s	RESISTOR,ADJ,CERMET 2K
S401	1-570-711-11	s	SWITCH,SLIDE

VPR-57 BOARD (BKP-9330)

---

*1: Serial No. 10018 through 10057
*2: Serial No. 10058 and higher

Ref. No. or Q'ty	Part No.	SP	Description
1pc	3-628-832-01	o	PC BOARD PANEL VPR-57
1pc	3-681-020-01	o	PC SHIELD PLATE
2pcs	3-681-042-01	o	LEVER, PC BOARD(1)
2pcs	3-681-045-01	o	LEVER, PC BOARD(2)
4pcs	7-621-759-40	s	SCREW +PSW 2.6X6(EP-FE/ZNBK/CM
4pcs	7-626-320-11	s	SPRING PIN,3X8 (STEEL)
5pcs	7-682-947-01	s	SCREW +PSW 3X6
C101	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C102	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C103	1-115-416-11	s	CAPACITOR,CERAMIC 1000PF/25V
C104	1-115-416-11	s	CAPACITOR,CERAMIC 1000PF/25V
C105	1-162-966-11	s	CAPACITOR,CERAMIC 2200PF/50V B
C106	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C107	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C108	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C109	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C110	1-135-211-11	s	CAPACITOR TANTAL 6.8MF/6.3V
C111	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C112	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C113	1-135-211-11	s	CAPACITOR TANTAL 6.8MF/6.3V
C114	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C115	1-104-652-11	s	CAPACITOR,ELECT 470MF/16V(105)
C116	1-104-652-11	s	CAPACITOR,ELECT 470MF/16V(105)
C117	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C118	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C119	1-104-652-11	s	CAPACITOR,ELECT 470MF/16V(105)
C120	1-104-652-11	s	CAPACITOR,ELECT 470MF/16V(105)
C121	1-135-211-11	s	CAPACITOR TANTAL 6.8MF/6.3V
C122	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C123	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C124	1-104-652-11	s	CAPACITOR,ELECT 470MF/16V(105)
C125	1-104-652-11	s	CAPACITOR,ELECT 470MF/16V(105)
C126	1-135-145-11	s	CAPACITOR TANTALUM 0.47MF/35V
C127	1-104-652-11	s	CAPACITOR,ELECT 470MF/16V(105)
C128	1-104-652-11	s	CAPACITOR,ELECT 470MF/16V(105)
C129	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C130	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C131	1-104-652-11	s	CAPACITOR,ELECT 470MF/16V(105)
C132	1-104-652-11	s	CAPACITOR,ELECT 470MF/16V(105)
C133	1-104-652-11	s	CAPACITOR,ELECT 470MF/16V(105)
C134	1-104-652-11	s	CAPACITOR,ELECT 470MF/16V(105)
C135	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C136	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C137	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C138	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C201	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C202	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C203	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C204	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C205	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C206	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C207	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C208	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C209	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C301	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V

(VPR-57 BOARD (BKP-9330))

Ref. No. or Q'ty	Part No.	SP	Description
C302	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C303	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C304	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C305	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C306	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C307	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C308	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C309	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C310	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C311	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C312	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C313	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C314	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C315	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C316	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C317	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C318	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C319	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C320	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C321	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C322	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C323	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C324	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C325	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C326	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C327	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C328	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C329	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C330	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C331	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C332	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C333	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C334	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C335	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C336	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C337	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C338	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C339	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C340	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C341	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C342	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C343	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C344	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C345	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C346	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C347	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C348	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C349	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C350	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C351	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C352	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C353	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C354	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C355	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C356	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C357	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C358	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C359	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C360	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F

(VPR-57 BOARD (BKP-9330))

Ref. No. or Q'ty	Part No.	SP	Description
C401	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C402	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C403	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C404	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C405	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C406	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C407	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C408	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C409	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C410	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C411	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C412	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C413	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C414	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C415	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C416	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C417	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C418	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C419	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C501	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C502	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C503	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C504	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C505	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C506	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C507	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C508	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C509	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C510	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C511	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C512	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C513	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C514	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C515	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C516	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C517	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C518	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C519	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C520	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C521	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C522	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C523	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C524	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C525	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C526	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C527	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C534	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C601	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C602	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C603	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C604	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C605	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C606	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C607	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C608	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C609	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C610	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C611	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C612	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F

(VPR-57 BOARD (BKP-9330))

Ref. No. or Q'ty	Part No.	SP	Description
C613	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C614	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C615	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C616	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C617	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C618	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C619	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C620	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C621	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C622	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C623	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C624	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C625	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C626	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C701	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C702	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C703	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C704	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C705	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C706	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C707	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C708	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C709	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C710	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C711	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C712	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C713	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C714	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C715	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C716	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C717	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C718	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C719	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C720	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C721	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C722	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C723	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C724	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C725	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C726	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C801	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C802	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C803	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C804	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C805	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C806	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C807	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C808	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C809	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C810	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C811	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C812	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C813	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C814	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C815	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C816	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C817	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C901	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C902	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V

(VPR-57 BOARD (BKP-9330))

Ref. No. or Q'ty	Part No.	SP	Description
C903	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C904	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C905	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C906	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C907	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C908	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C909	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C910	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C911	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C912	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C913	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C914	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C915	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C916	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C917	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C918	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C919	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C920	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C921	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C922	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C923	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C924	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C925	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C926	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C927	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C928	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C929	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C930	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C931	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C932	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C933	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C934	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C935	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C936	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C937	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C938	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C939	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C940	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C941	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C942	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C943	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C944	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C945	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C946	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C947	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C948	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C949	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C950	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C951	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C952	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C953	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C954	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C955	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C956	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C957	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C958	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C959	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C960	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C961	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F

(VPR-57 BOARD (BKP-9330))

Ref. No. or Q'ty	Part No.	SP	Description
C1001	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1002	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1003	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1004	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1005	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1006	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1007	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1008	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1009	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1010	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C1011	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1012	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1013	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1014	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1015	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1016	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1017	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1018	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1019	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1020	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1021	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1022	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1023	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1024	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1025	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1026	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1027	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1036	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1037	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1038	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1039	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1101	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1102	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1103	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1104	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1105	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C1106	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1107	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1108	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1109	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1110	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1111	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1112	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1113	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1114	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1115	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C1116	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1117	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1118	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1119	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1120	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C1121	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
CN1102	1-695-889-21	s	PIN, CONNECTOR (PC BOARD) 10P
D101	8-719-061-94	s	DIODE CL-220PG-C-TU
D102	8-719-061-94	s	DIODE CL-220PG-C-TU
D103	8-719-061-94	s	DIODE CL-220PG-C-TU
D104	8-719-061-94	s	DIODE CL-220PG-C-TU
D105	8-719-061-94	s	DIODE CL-220PG-C-TU

(VPR-57 BOARD (BKP-9330))

Ref. No. or Q'ty	Part No.	SP	Description	
D106	8-719-981-38	s	DIODE ERC62M-004	(RECTI)
D107	8-719-981-38	s	DIODE ERC62M-004	(RECTI)
D108	8-719-104-34	s	DIODE 1S2836	
D109	8-719-104-34	s	DIODE 1S2836	
D110	8-719-058-14	s	LED CL-220PG-C-TS	
D1101	8-719-058-13	s	LED CL-220UR-C-TU	
D1102	8-719-058-13	s	LED CL-220UR-C-TU	
D1103	8-719-058-13	s	LED CL-220UR-C-TU	
D1104	8-719-058-14	s	LED CL-220PG-C-TS	
IC101	8-759-937-36	s	IC TL1451ACNS	
IC102	8-759-906-53	s	IC TL062CPS	
IC103	8-759-185-42	s	IC LM4040AIM3-2.5	
IC201	8-759-456-24	s	IC 74LCX540MTCX	
IC202	8-759-456-26	s	IC 74LCX541MTCX	
IC203	8-759-491-50	s	IC TC74VHCT244AFT(EL)	
IC204	8-759-466-56	s	IC 74LCX86MTCX	
IC205	8-759-386-26	s	IC 74LCX574MTCX	
IC206	8-759-386-26	s	IC 74LCX574MTCX	
IC207	8-759-386-26	s	IC 74LCX574MTCX	
IC208	8-759-386-26	s	IC 74LCX574MTCX	
IC209	8-759-386-26	s	IC 74LCX574MTCX	
IC301	8-759-591-60	s	IC XC4044XLA-09HQ304C	
IC302 *1	8-759-559-40	s	IC MB811643242A-100FN	
IC302 *2	8-759-713-79	s	IC MB81F643242C-10FN	
IC303 *1	8-759-559-40	s	IC MB811643242A-100FN	
IC303 *2	8-759-713-79	s	IC MB81F643242C-10FN	
IC304	8-759-559-40	s	IC MB811643242A-100FN	
IC305	8-759-386-26	s	IC 74LCX574MTCX	
IC306	8-759-386-26	s	IC 74LCX574MTCX	
IC307	8-759-386-26	s	IC 74LCX574MTCX	
IC308	8-759-386-26	s	IC 74LCX574MTCX	
IC402	8-759-466-55	s	IC 74LCX74MTCX	
IC403	8-759-386-26	s	IC 74LCX574MTCX	
IC501	8-759-466-56	s	IC 74LCX86MTCX	
IC503	8-759-389-31	s	IC 74LCX125MTCX	
IC801	8-759-466-56	s	IC 74LCX86MTCX	
IC802	8-759-386-26	s	IC 74LCX574MTCX	
IC803	8-759-386-26	s	IC 74LCX574MTCX	
IC804	8-759-386-26	s	IC 74LCX574MTCX	
IC805	8-759-386-26	s	IC 74LCX574MTCX	
IC806	8-759-386-26	s	IC 74LCX574MTCX	
IC807	8-759-386-26	s	IC 74LCX574MTCX	
IC808	8-759-386-26	s	IC 74LCX574MTCX	
IC809	8-759-386-26	s	IC 74LCX574MTCX	
IC810	8-759-386-26	s	IC 74LCX574MTCX	
IC811	8-759-386-26	s	IC 74LCX574MTCX	
IC812	8-759-386-26	s	IC 74LCX574MTCX	
IC813	8-759-386-26	s	IC 74LCX574MTCX	
IC814	8-759-386-26	s	IC 74LCX574MTCX	
IC815	8-759-386-26	s	IC 74LCX574MTCX	
IC816	8-759-386-26	s	IC 74LCX574MTCX	
IC817	8-759-386-26	s	IC 74LCX574MTCX	
IC901	8-759-389-33	s	IC 74LCX244MTCX	
IC902	8-759-591-60	s	IC XC4044XLA-09HQ304C	
IC903 *1	8-759-559-40	s	IC MB811643242A-100FN	
IC903 *2	8-759-713-79	s	IC MB81F643242C-10FN	
IC904 *1	8-759-559-40	s	IC MB811643242A-100FN	
IC904 *2	8-759-713-79	s	IC MB81F643242C-10FN	
IC905 *1	8-759-559-40	s	IC MB811643242A-100FN	
IC905 *2	8-759-713-79	s	IC MB81F643242C-10FN	

(VPR-57 BOARD (BKP-9330))

Ref. No. or Q'ty	Part No.	SP	Description
IC906	8-759-386-26	s	IC 74LCX574MTCX
IC907	8-759-386-26	s	IC 74LCX574MTCX
IC908	8-759-386-26	s	IC 74LCX574MTCX
IC909	8-759-386-26	s	IC 74LCX574MTCX
IC1001	8-759-389-33	s	IC 74LCX244MTCX
IC1002	8-759-445-73	s	IC M66256FP (E2)
IC1003	8-759-445-73	s	IC M66256FP (E2)
IC1004	8-759-445-73	s	IC M66256FP (E2)
IC1005	8-759-445-73	s	IC M66256FP (E2)
IC1006	8-759-445-73	s	IC M66256FP (E2)
IC1007	8-759-445-73	s	IC M66256FP (E2)
IC1008	8-759-445-73	s	IC M66256FP (E2)
IC1009	8-759-445-73	s	IC M66256FP (E2)
IC1010	8-759-591-60	s	IC XC4044XLA-09HQ304C
IC1012 *2	8-759-828-34	o	IC 29F040-BKP9330-V1.00
IC1014	8-759-386-26	s	IC 74LCX574MTCX
IC1015	8-759-386-26	s	IC 74LCX574MTCX
IC1016	8-759-386-26	s	IC 74LCX574MTCX
IC1017	8-759-386-26	s	IC 74LCX574MTCX
IC1101	8-759-058-64	s	IC TC7S32FU-TE85R
IC1102	8-759-058-62	s	IC TC7S08FU-TE85R
IC1103	8-759-386-27	s	IC 74LCX04MTCX
IC1104	8-759-472-43	s	IC 74VHC245MTCX
IC1105	8-759-472-43	s	IC 74VHC245MTCX
IC1106	8-759-472-43	s	IC 74VHC245MTCX
IC1107	8-759-389-26	s	IC 74LCX08MTCX
IC1108	8-759-472-18	s	IC 74VHC138MTCX
IC1109	8-759-996-82	s	IC MSM82C55A-2GS
IC1110	8-759-996-82	s	IC MSM82C55A-2GS
IC1111	8-759-996-82	s	IC MSM82C55A-2GS
IC1112 *1	8-759-569-91	s	IC TLC7733IPWR
IC1112 *2	8-759-669-69	s	IC TLC7733IPWR-12
IC1113	8-759-996-82	s	IC MSM82C55A-2GS
IC1114	8-759-996-82	s	IC MSM82C55A-2GS
IC1115 *1	8-759-569-91	s	IC TLC7733IPWR
IC1115 *2	8-759-669-69	s	IC TLC7733IPWR-12
IC1116	8-759-456-26	s	IC 74LCX541MTCX
IS1012	1-540-151-21	s	SOCKET, IC
L101	1-414-441-11	s	INDUCTOR (POWER) 15UH
L102	1-414-441-11	s	INDUCTOR (POWER) 15UH
L103	1-414-441-11	s	INDUCTOR (POWER) 15UH
L104	1-414-529-21	s	INDUCTOR (POWER)
L105	1-414-529-21	s	INDUCTOR (POWER)
L106	1-403-684-11	s	COIL, CHOKE
L107	1-403-684-11	s	COIL, CHOKE
L108	1-409-914-11	s	COIL, CHOKE 10UH
L109	1-409-914-11	s	COIL, CHOKE 10UH
L201	1-412-028-11	s	INDUCTOR,CHIP 4.7UH (3225)
L301	1-412-028-11	s	INDUCTOR,CHIP 4.7UH (3225)
L302	1-412-028-11	s	INDUCTOR,CHIP 4.7UH (3225)
L303	1-412-028-11	s	INDUCTOR,CHIP 4.7UH (3225)
L304	1-412-028-11	s	INDUCTOR,CHIP 4.7UH (3225)
L401	1-412-028-11	s	INDUCTOR,CHIP 4.7UH (3225)
L501	1-412-028-11	s	INDUCTOR,CHIP 4.7UH (3225)
L502	1-412-028-11	s	INDUCTOR,CHIP 4.7UH (3225)
L601	1-412-028-11	s	INDUCTOR,CHIP 4.7UH (3225)
L602	1-412-028-11	s	INDUCTOR,CHIP 4.7UH (3225)
L701	1-412-028-11	s	INDUCTOR,CHIP 4.7UH (3225)

(VPR-57 BOARD (BKP-9330))

Ref. No. or Q'ty	Part No.	SP	Description
L702	1-412-028-11	s	INDUCTOR,CHIP 4.7UH (3225)
L901	1-412-028-11	s	INDUCTOR,CHIP 4.7UH (3225)
L902	1-412-028-11	s	INDUCTOR,CHIP 4.7UH (3225)
L903	1-412-028-11	s	INDUCTOR,CHIP 4.7UH (3225)
L904	1-412-028-11	s	INDUCTOR,CHIP 4.7UH (3225)
L1001	1-412-026-11	s	INDUCTOR,CHIP 1UH (3225)
L1003	1-412-028-11	s	INDUCTOR,CHIP 4.7UH (3225)
L1006	1-412-028-11	s	INDUCTOR,CHIP 4.7UH (3225)
L1101	1-412-028-11	s	INDUCTOR,CHIP 4.7UH (3225)
L1102	1-412-028-11	s	INDUCTOR,CHIP 4.7UH (3225)
L1103	1-412-028-11	s	INDUCTOR,CHIP 4.7UH (3225)
Q101	8-729-113-13	s	TRANSISTOR FA1A4M-L33
Q102	8-729-113-13	s	TRANSISTOR FA1A4M-L33
Q103	8-729-120-28	s	TRANSISTOR 2SC1623-L5L6
Q104	8-729-120-28	s	TRANSISTOR 2SC1623-L5L6
Q105	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q106	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q107	8-729-206-05	s	TRANSISTOR 2SA1329-O
Q108	8-729-206-05	s	TRANSISTOR 2SA1329-O
Q109	8-729-120-28	s	TRANSISTOR 2SC1623-L5L6
Q1101	8-729-120-28	s	TRANSISTOR 2SC1623-L5L6
Q1102	8-729-120-28	s	TRANSISTOR 2SC1623-L5L6
Q1103	8-729-120-28	s	TRANSISTOR 2SC1623-L5L6
Q1104	8-729-120-28	s	TRANSISTOR 2SC1623-L5L6
R101	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R102	1-216-822-11	s	RESISTOR, CHIP 1.2K 1/16W 1608
R103	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R104	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R105	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R106	1-216-823-11	s	RESISTOR, CHIP 1.5K 1/16W
R107	1-216-835-11	s	RESISTOR,CHIP 15K 1/16W
R108	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R109	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R110	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R111	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R112	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R113	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R114	1-216-830-11	s	RESISTOR,CHIP 5.6K 1/16W 1608
R115	1-216-830-11	s	RESISTOR,CHIP 5.6K 1/16W 1608
R116	1-216-835-11	s	RESISTOR,CHIP 15K 1/16W
R117	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R118	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R119	1-216-827-11	s	RESISTOR, CHIP 3.3K 1/16W 1608
R120	1-216-827-11	s	RESISTOR, CHIP 3.3K 1/16W 1608
R121	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R122	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R123	1-216-813-11	s	RESISTOR, CHIP 220 1/16W 1608
R124	1-216-813-11	s	RESISTOR, CHIP 220 1/16W 1608
R125	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R126	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R127	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R128	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R129	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R130	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R131	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R132	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R133	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R134	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608

(VPR-57 BOARD (BKP-9330))

Ref. No. or Q'ty	Part No.	SP	Description
R135	1-216-839-11	s	RESISTOR,CHIP 33K 1/16W 1608
R136	1-216-839-11	s	RESISTOR,CHIP 33K 1/16W 1608
R137	1-216-839-11	s	RESISTOR,CHIP 33K 1/16W 1608
R138	1-216-853-11	s	RESISTOR,CHIP 470K 1/16W(1608)
R139	1-216-853-11	s	RESISTOR,CHIP 470K 1/16W(1608)
R140	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R141	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R142	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R143	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R144	1-216-827-11	s	RESISTOR, CHIP 3.3K 1/16W 1608
R145	1-216-829-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R146	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R201	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R202	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R203	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R204	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R205	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R206	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R207	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R208	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R209	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R210	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R211	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R212	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R213	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R214	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R215	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R216	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R218	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R219	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R220	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R221	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R301	1-216-829-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R302	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R303	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R304	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R305	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R306	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R307	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R401	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R402	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R403	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R404	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R405	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R406	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R407	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R408	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R409	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R410	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R411	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R412	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R413	1-216-829-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R414	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R415	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R501	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R502	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R503	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R505	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R507	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)

(VPR-57 BOARD (BKP-9330))

Ref. No. or Q'ty	Part No.	SP	Description
R508	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R509	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R510	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R511	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R512	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R513	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R514	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R515	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R516	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R517	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R518	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R519	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R602	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R604	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R605	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R606	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R607	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R608	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R609	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R610	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R611	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R612	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R613	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R614	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R615	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R702	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R704	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R705	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R706	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R707	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R708	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R709	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R710	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R711	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R712	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R713	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R714	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R715	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R801	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R802	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R803	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R804	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R901	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R902	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R903	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R904	1-216-829-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R905	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R906	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R907	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R908	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R909	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R910	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R1001	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R1002	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R1003	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R1004	1-216-829-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R1007	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1008	1-216-829-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R1102	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)

(VPR-57 BOARD (BKP-9330))

Ref. No. or Q'ty	Part No.	SP	Description
R1104	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1106	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1107	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R1110	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1111	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R1112	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1113	1-216-829-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R1114	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R1115	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R1116	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1117	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1118	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1119	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R1120	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R1121	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R1122	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1124	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R1125	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R1126	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R1128	1-216-829-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R1129	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R1131	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1133	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1201	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1202	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
RB201	1-239-309-11	s	RESISTOR ARRAY,CHIP 100K
RB202	1-236-907-11	s	RESISTOR BLOCK 100K (1608)
RB203	1-239-309-11	s	RESISTOR ARRAY,CHIP 100K
RB204	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB205	1-239-309-11	s	RESISTOR ARRAY,CHIP 100K
RB206	1-236-907-11	s	RESISTOR BLOCK 100K (1608)
RB207	1-239-309-11	s	RESISTOR ARRAY,CHIP 100K
RB208	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB209	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB210	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB211	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB212	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB213	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB214	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB215	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB216	1-236-907-11	s	RESISTOR BLOCK 100K (1608)
RB301	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB302	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB303	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB501	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB502	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB503	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB504	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB505	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB506	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB507	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB508	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB509	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB510	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB511	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB512	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB601	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB602	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB603	1-239-409-11	s	RESISTOR NETWORK 47 (1608)

(VPR-57 BOARD (BKP-9330))

Ref. No. or Q'ty	Part No.	SP	Description
RB604	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB605	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB606	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB607	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB608	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB609	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB610	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB611	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB612	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB701	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB702	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB703	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB704	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB705	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB706	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB707	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB708	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB709	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB710	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB711	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB712	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB901	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB902	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB903	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB904	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB905	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB906	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB907	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB908	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB909	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB910	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB911	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB1001	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB1002	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB1003	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB1004	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB1005	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB1006	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB1101	1-239-310-11	s	RESISTOR ARRAY, CHIP 220K
RB1102	1-239-310-11	s	RESISTOR ARRAY, CHIP 220K
RB1103	1-239-310-11	s	RESISTOR ARRAY, CHIP 220K
RB1104	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB1105	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB1106	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB1107	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB1108	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB1109	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB1110	1-239-308-11	s	RESISTOR ARRAY,CHIP 47K
RB1111	1-239-308-11	s	RESISTOR ARRAY,CHIP 47K
RB1112	1-239-308-11	s	RESISTOR ARRAY,CHIP 47K
RB1113	1-239-308-11	s	RESISTOR ARRAY,CHIP 47K
RB1114	1-239-308-11	s	RESISTOR ARRAY,CHIP 47K
RB1115	1-239-308-11	s	RESISTOR ARRAY,CHIP 47K
RB1116	1-239-308-11	s	RESISTOR ARRAY,CHIP 47K
RB1117	1-239-308-11	s	RESISTOR ARRAY,CHIP 47K
RB1118	1-236-907-11	s	RESISTOR BLOCK 100K (1608)
S1101	1-692-271-31	s	SWITCH, SLIDE
S1102	1-692-271-31	s	SWITCH, SLIDE

(VPR-57 BOARD (BKP-9330))

Ref. No. or Q'ty	Part No.	SP	Description
S1103	1-692-271-31	s	SWITCH, SLIDE
S1104	1-692-271-31	s	SWITCH, SLIDE
S1105	1-692-271-31	s	SWITCH, SLIDE
S1106	1-692-066-11	s	SWITCH, ROTARY
S1107	1-692-066-11	s	SWITCH, ROTARY
S1108 *1	1-570-710-11	s	SWITCH, SLIDE
S1108 *2	1-762-217-31	s	SWITCH, SLIDE
S1109	1-771-421-11	s	SWITCH, ROTARY
THP101 ⚠	1-803-150-11	s	THERMISTOR, POSITIVE
THP102 ⚠	1-762-254-21	s	SWITCH, POLY
THP103 ⚠	1-803-150-11	s	THERMISTOR, POSITIVE
THP104 ⚠	1-803-150-11	s	THERMISTOR, POSITIVE

1-4. Frame List

FRAME

Ref. No. or Q'ty	Part No.	SP	Description
CN101	1-774-993-11	o	CONNECTOR, OPTICAL (FC TYPE)
CN102	1-774-993-11	o	CONNECTOR, OPTICAL (FC TYPE)
FAN101	1-698-059-11	s	FAN, DC (12V)(40X40)
FAN102	1-698-059-11	s	FAN, DC (12V)(40X40)
FB101	1-543-609-11	s	CORE,FERRITE
HN201 ⚠	1-777-204-21	o	CABLE ASSEMBLY, ENCAPSULATE (F) (To CN4,CN2/MB-647 board, CN3/TX-63 board and CN2/RX-42 board)
HN202	————		HARNESS (INCOM)
(To CN6/CN-1617 board)			
1pc	1-580-589-11	o	HOUSING, CONNECTOR 26P
26pcs	1-580-599-11	o	TERMINAL,SOLDERLESS
(To CN1/CN-1638 board)			
1pc	1-580-589-11	o	HOUSING, CONNECTOR 26P
26pcs	1-580-599-11	o	TERMINAL,SOLDERLESS
(To CN7/CN-1617 board)			
6pcs	1-573-176-11	o	TERMINAL, SOLDERLESS
1pc	1-580-590-11	o	HOUSING, CONNECTOR 28P
22pcs	1-580-599-11	o	TERMINAL,SOLDERLESS
(To CN2/CN-1638 board)			
6pcs	1-573-176-11	o	TERMINAL, SOLDERLESS
1pc	1-580-590-11	o	HOUSING, CONNECTOR 28P
22pcs	1-580-599-11	o	TERMINAL,SOLDERLESS
HN203	————		HARNESS (MIC)
(To CN11/CN-1617 board)			
2pcs	1-573-176-11	o	TERMINAL, SOLDERLESS
1pc	1-580-580-11	o	HOUSING, CONNECTOR 8P
4pcs	1-580-599-11	o	TERMINAL,SOLDERLESS
HN204	————		HARNESS (DIGITAL AUDIO)
(To CN13/CN-1617 boad)			
1pc	1-573-176-11	o	TERMINAL, SOLDERLESS
1pc	1-580-579-11	o	HOUSING, CONNECTOR 6P
1pc	1-580-599-11	o	TERMINAL,SOLDERLESS
(To DIGITAL AUDIO)			
CN103	1-569-253-21	s	CONNECTOR, BNC
HN205	————		HARNESS (CHAR)
(To CN22/CN-1617 boad)			
1pc	1-573-176-11	o	TERMINAL, SOLDERLESS
1pc	1-580-578-11	s	HOUSING, CONNECTOR 4P
1pc	1-580-599-11	o	TERMINAL,SOLDERLESS
(To CHARACTER)			
CN104	1-569-253-21	s	CONNECTOR, BNC
HN206	1-777-902-11	o	WIRE, FLAT TYPE (10 CORE) (CN8/CN-1617 board to CN1/CN-1637 board)
HN207	1-590-168-11	s	WIRE, FLAT TYPE (16 CORE) (CN9/CN-1617 board to CN2/CN-1636 board)
HN208	1-590-489-11	s	WIRE,FLAT TYPE (25CORE) (CN5/CN-1617 board to CN1/CN-1636 board)
HN209	1-956-087-11	o	HARNESS (WF-CTL)
(To CN12/CN-1617 boad)			
4pcs	1-569-194-11	o	TERMINAL, SOLDERLESS
1pc	1-569-197-11	o	HOUSING, CONNECTOR 4P
(To WFM-MODE)			
CN105	1-561-376-00	s	CONNECTOR,4P
HN210	————		HARNESS (NEW-COM)
(To CN3/MB-647 boad)			
1pc	1-580-580-11	o	HOUSING, CONNECTOR 8P
8pcs	1-580-599-11	o	TERMINAL,SOLDERLESS

(FRAME)

Ref. No. or Q'ty	Part No.	SP	Description
(To CN1/CN-1618 boad)			
1pc	1-580-580-11	o	HOUSING, CONNECTOR 8P
8pcs	1-580-599-11	o	TERMINAL,SOLDERLESS
HN211	1-590-168-11	s	WIRE, FLAT TYPE (16 CORE) (CN10/CN-1617 board to CN1/CN-1635 board)

1-5. Supplied Accessories List

Ref. No. or Q'ty		Part No.	SP	Description
1pc	⚠	1-551-812-11	s	CORD,POWER (for UC)
1pc		1-560-155-00	s	CONNECTOR (PLUG)
1pc	⚠	1-576-231-11	s	FUSE(H.B.C)
1pc	⚠	1-576-233-11	s	FUSE (H.B.C.) 6.3A/250V
1pc	⚠	1-782-929-11	s	CORD,POWER (BS 3P) (for CE)
1pc	⚠	1-791-041-11	s	CORD SET,POWER (3P) (for J)
1pc	⚠	1-793-461-11	o	PLUG,CONVERSION (3P-2P) (for J)
1pc		2-990-242-01	s	HOLDER (B),PLUG (for UC)
1pc		3-613-640-01	o	HOLDER (C),PLUG (for J/CE)
1pc		A-8278-054-A	o	REMOTE INDICATOR ASSY

1-6. Optional Fixtures List

Part No.	SP	Description
A-8326-353-A	o	EXTENSION BOARD, EX-525A
J-6394-280-A	o	EXTENSION BOARD, JX-428
J-6395-040-A	o	EXTENSION BOARD, EX-464
J-6480-010-A	o	ALIGNMENT SLEEVE REMOVER, HC-001

Section 2
Semiconductor Pin Assignments

The following describes the semiconductor types used in this unit.
For semiconductors marked with page numbers in the index, refer to the corresponding pages in this section. However, in some cases incompatible types are also listed, therefore, when a part is to be replaced, also refer to the Spare Parts section.
In addition, for semiconductors with ID Nos., refer to the separate CD-ROM titled “Semiconductor Pin Assignments” (Sony Part No. 9-968-546-xx) that allows searching for parts by semiconductor type or ID No.
The semiconductors in the manual or on the CD-ROM are listed by equivalent types. Thus the external view or the index mark indication may differ from the actual type.
Pin assignments and block diagrams are based on the IC manufacturer’s data book.

本機に使用されている半導体型名の一覧を下記に示します。
索引中，ページが記載されている半導体は，本章の該当ページを参照してください。ただし，互換性のない型名を併記している場合がありますので，部品を交換するときは，Spare Partsの章を参照してください。
また，ID番号が記載されている半導体は，別途発行の “Semiconductor Pin Assignments” CD−ROM版 (ソニー部品番号：9−968−546−xx)を参照してください。
半導体型名またはID番号から検索ができます。
マニュアルまたはCD−ROMに掲載されている半導体は，それぞれの機能を等価的に表わしたものです。
外観やインデックスマークの表示方法が実物と異なる場合があります。
ピン配置およびブロック図はICメーカーのデータブックに従いました。

DIODE — **Page or ID No.**

1SS123-T1 ..... DC001-01
1SS226 ..... DC001-01
1SS300-TE85L DC001-02
1SS301-TE85L DC001-03
1SS302 ..... DC001-01
1SS302-TE85L DC001-01

FMP1 ..... DC014-01
FMP1-T-148 ..... DC014-01

HSM88AS-TL DC001-01

MA141WK DC001-03
MA3J74200LSO DC001-01
MA721WA-TX DC001-02
MA721WK-(TX) DC001-03

RD10M-B2 ..... DC001-04
RD10M-T1B DC001-04
RD2.0M-T1B DC001-04
RD2.0MB DC001-04
RD4.7M-B DC001-04
RD4.7M-T1B DC001-04
RD5.1M-T1B DC001-04
RD6.8M-T1B DC001-04

UZM5.1B DC001-04

LED — **Page or ID No.**

CL-220HR-C-TS 2-4
CL-220PG-C-TS LC008-01
CL-220Y 2-4
CL-220Y-C-TS 2-4

SML-310MTT86 ..... LC004-01

TRANSISTOR — **Page or ID No.**

2SA1162G TC001-01
2SA1213Y-TE12L TC002-01
2SA1226-T1E3 ..... TC001-01
2SA1385-Z-T2M TC001-03
2SA1610-T1Y34 ..... TC001-01
2SA1610-Y33 ..... TC001-01
2SA1611-M5M6 ..... TC001-01
2SA1611-M6 ..... TC001-01
2SA1611-T1M7 ..... TC001-01
2SA1611T1-M5M6 ..... TC001-01
2SA1688-4-SONY-TL TC001-01
2SA812-T1-M5M6 ..... TC001-01
2SB798-DL TC002-01
2SC1623-L5L6 ..... TC001-02
2SC1623-T1-L5L6 ..... TC001-02
2SC2873Y-TE12L TC002-02
2SC3356-K TC001-02
2SC3356-T1K TC001-02
2SC3518-L TR031-01
2SC3518-ZL-E2 ..... TR031-01
2SC4176-B34 ..... TC001-02
2SC4176T1B33B34B35 ..... TC001-02
2SC4177-L6 ..... TC001-02
2SC4177-T1L5L6 ..... TC001-02
2SC4178-F13 ..... TC001-02
2SC4178-T1F13 ..... TC001-02

Index

TRANSISTOR	Page or ID No.
2SD1615A-GP	TC002-02
2SD1615A-T1GQGP	TC002-02
2SD1623-S	TC002-02
2SD596DV345	TC001-02
2SD596T1-DV345	TC001-02
DTC144EUA-T106	TC001-03
FA1A4M-L33	TC001-03
IMH2	TC005-08
IMH2-T110	TC005-08
XN6435	TC006-01
XN6435-TW	TC006-01

IC	Page or ID No.
74LCX04MTCX	TC74HC04P
74LCX125MTCX	MC74HC125N
74LCX244MTCX	TC74HC244P
74LCX541MTCX	MC74HC541N
74LCX574MTCX	TC74HC574P
74VHC00MTCX	TC74HC00P
74VHC02MTCX	TC74HC02P
74VHC04MTCX	TC74HC04P
74VHC08MTCX	TC74HC08P
74VHC123AMTCX	TC74HC123P
74VHC125MTCX	MC74HC125N
74VHC138MTCX	TC74HC138P
74VHC157MTCX	TC74HC157P
74VHC161MTCX	TC74HC161P
74VHC163MTCX	TC74HC163P
74VHC221AMTCX	TC74HC221P
74VHC244MTCX	TC74HC244P
74VHC245MTCX	TC74HC245P
74VHC32MTCX	TC74HC32P
74VHC4051MX	MC74HC4051N
74VHC4052MX	MC74HC4052N
74VHC541MTCX	MC74HC541N
74VHC573MTCX	TC74HC573F
74VHC574MTCX	TC74HC574P
74VHC74MTCX	TC74HC74P
74VHCT00AMTCX	TC74HC00P
74VHCT04AMTCX	TC74HC04P
74VHCT04MTCX	TC74HC04P
74VHCT08AMTCX	TC74HC08P
74VHCT244AMTCX	TC74HC244P
74VHCT245AMTCX	TC74HC245P
74VHCT574AMTCX	TC74HC574P
ADS822E/1K	2-4
AM29F040B-90JC	AM29F040-90JC
CAT24WC02J-TE13	2-4
CLC450AJM5	AD8055ART-REEL7
CLC505AJE	CLC505AJE
CLC505AJE-T	CLC505AJE

IC	Page or ID No.
CXB1341R	CXB1341R
CXB1342R	CXB1342R
CXD2315Q	CXD2306Q
CXD3122R	CXD3122R
CXD3122R-T4	CXD3122R
CXD8277Q	CXD8277Q
CXD8280AQ	CXD8280AQ
CXD8281Q	CXD8281Q
CXD8344AQ	CXD8344AQ
CXD8953Q	CXD8953Q
CXD8961R	2-4
CXD8962R	2-6
CXD8963R	2-7
CXD8964R	2-8
CXD8966R	2-9
CXD8967R	2-10
CXD9093R	CXD9093R
CY62256VLL-70ZC-T2	CY62256-70SNC-T2
EPC2LC20	EPC2LC20
EPFQC240AA	EPF10K100ARC240-3
EPM7128AETC100-10	EPM7128STC100-7
GS4882-CTA	GS4882-CTA
HD151015T	HD151015T
HD151015TEL	HD151015T
HD6417032VF12	HD6417032F20
HMP8117CN	HMP8117CN
HN58C257AT-10	HN58C257T
HN58C257AT10	HN58C257T
LM339NS	LM339
LM339NS-E20	LM339
LM4040AIM3-2.5	LM4040BIM3
LM4040BIM3-5.0	LM4040BIM3
LM4040BIM3X-5.0	LM4040BIM3
M51132FP	M51132FP
M51132FP-E1	M51132FP
M51958A	M51958A
M66256FP-E2	M66256FP
MAX3232CSE-TE2	MAX3232CSE-TE2
MB81F643242B-10	MB811643242A-100FN
MB81F643242B-10FN	MB811643242A-100FN
MB88141APFV-ER	MB88141PF-ER
MC100LVEL16D	MC10EL16DR2
MC14020BFEL	TC74HC4020P
MC14046BF	CD4046BE
MC14046BFEL	CD4046BE
MC14053BF	MC74HC4053F
MC14053BFEL	MC74HC4053F
MC14538BFE	MC74HC4538N
MC14538BFEL	MC74HC4538N
MC34182M	RC4558
MC74HC4046AF	CD4046BE
MC74HC4046AFEL	CD4046BE
MSM6685JSDR1	2-11
MSM6688GS-2K	2-12

IC	Page or ID No.
MSM82C55A-2GS	MSM82C55A-5GS
MSM82C55A-2GS-VK	MSM82C55A-5GS
NC7SZ04P5	TC7S04F
NC7SZ04P5X	TC7S04F
NC7SZ08P5	TC7S08F
NC7SZO8P5	TC7S08F
NJM431U	NJM431U
NJM431U-TE1	NJM431U
NJM4556AM	RC4558
NJM4556AM-A-TE2	RC4558
NJM4560M	RC4558
NJM4560M-TE2	RC4558
NJM4580V(TE2)	RC4558
NJM4580V-TE2	RC4558
NJM5534M	NJM5534M
NJM5534M(TE2)	NJM5534M
NJM78L05UA	NJM78L12UA
NJM78L05UA-TE1	NJM78L12UA
NJM78L08UA	NJM78L12UA
NJM78L08UA-TE1	NJM78L12UA
NJM78L12UA-TE1	NJM78L12UA
PCF8574TS-T	2-12
PCM1702U	PCM1702U-J
PCM3002E/2K	2-13
S2044B-10	2-14
S2045B-10	2-14
SM5843AS1-E2	SM5843AP1
SN74LV541APWR	MC74HC541N
SN74LV574APWR	TC74HC574P
SN75158PS	SN75158P
SN75158PSR	SN75158P
SN75179BPS	SN75179BP
SN75179BPS-E05	SN75179BP
STK12C68-S45	STK12C68-S45
TC4W53FU	TC4W53FU
TC4W53FU(TE12R)	TC4W53FU
TC74VHC4040FT(EL)	MC74HC4040N
TC74VHCT138AFT(EL)	TC74HC138P
TC7S00FU(TE85R)	TC7S00F
TC7S02FU(TE85R)	TC4S01F
TC7S04FU(TE85R)	TC7S04F
TC7S08FU(TE85R)	TC7S08F
TC7S86FU	TC7S86FU
TC7S86FU(TE85R)	TC7S86FU
TC7SH04FU	TC7S04F
TC7SH04FU-TE85R	TC7S04F
TC7SH08F-TE85R	TC7S08F
TC7SH08FU-TE85R	TC7S08F
TC7SH32FU-TE85R	TC7S32F
TC7W00FU	TC7W00F
TC7W00FU(TE12R)	TC7W00F
TC7W02F	TC7W02F
TC7W02FU(TE12R)	TC7W02F
TC7W04FU	TC7W04F
TC7W04FU(TE12R)	TC7W04F

IC	Page or ID No.
TC7W08FU	TC7W08F
TC7W08FU(TE12R)	TC7W08F
TC7W14FU(TE12R)	TC7W14FU
TL062ACPS-E05	RC4558
TL062CPS	RC4558
TL062CPSR	RC4558
TL062CPWR-12	RC4558
TL16C550CPT	TL16C550CPT
TL7705CPS-B	TL7705CP
TL7705CPS-B-E20	TL7705CP
TLC272CPWR	RC4558
TLC274CPWR-12	TLC27M4CN
TLC2932IPWR	TLC2932IPW
UPC311G2	UPC311C
UPC311G2-E2	UPC311C
UPD4702G	UPD4702G
UPD6466GS-515	UPD6466GS-502-E2

OTHERS	Page or ID No.
HCPL-0630-500	MA009-01
PS2604L	MA012-01

LED



CL-220HR-C-TS
CL-220Y
CL-220Y-C-TS

IC

ADS822E/1K (BURR-BROWN)

10-BIT 40MHz SAMPLING A/D CONVERTER
—TOP VIEW—

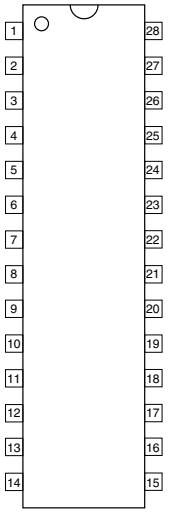

INPUTS

BYB	:	BOTTOM LADDER BYPASS
BYT	:	TOP LADDER BYPASS
CLK	:	CONVERT CLOCK
IN	:	ANALOG(+)
$\overline{IN}$	:	COMPLEMENTARY(–)
$\overline{INT}$/EXT	:	REFERENCE SELECT
$\overline{OE}$	:	OUTPUT ENABLE
PD	:	POWER DOWN
REFB	:	BOTTOM REFERENCE
REFT	:	TOP REFERENCE
RSEL	:	INPUT RANGE SELECT
VDRV	:	OUTPUT LOGIC DRIVER SUPPLY VOLTAGE

OUTPUTS

BIT1 - BIT10	:	DATA BIT
CM	:	COMMON MODE VOLTAGE

PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL
1	—	GND	8	O	BIT7	15	—	Vcc	22	I	REFT
2	O	BIT1(MSB)	9	O	BIT8	16	—	GND	23	O	CM
3	O	BIT2	10	O	BIT9	17	I	RSEL	24	I	$\overline{IN}$
4	O	BIT3	11	O	BIT10(LSB)	18	I	$\overline{INT}$/EXT	25	I	IN
5	O	BIT4	12	I	$\overline{OE}$	19	I	REFB	26	—	GND
6	O	BIT5	13	I	PD	20	I	BYB	27	—	Vcc
7	O	BIT6	14	I	CLK	21	I	BYT	28	I	VDRV

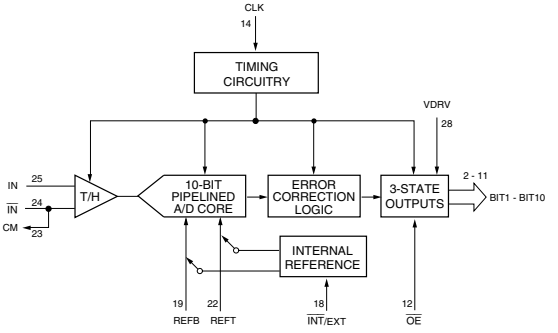

CAT24WC02J-TE13 (CATALYST)

SERIAL EEPROM
—TOP VIEW—



INPUTS

A0 - A2	:	ADDRESS
SCL	:	SERIAL CLOCK
$\overline{WC}$	:	WRITE CONTROL

INPUT/OUTPUT

SDA	:	SERIAL DATA

OTHERS

NC	:	NO CONNECTION
TEST	:	TEST PIN

※NOTE :

TYPE	MEMORY	PIN 7
NM24C16	16 K	NC
X24C02 S-24C02 CAT24WC02	2 K	$\overline{WC}$
X24C04	4 K	TEST
X24C08	8 K	TEST

CXD8961R (SONY)

OPTICAL TRANSFER CO-PROCESSOR
—TOP VIEW—

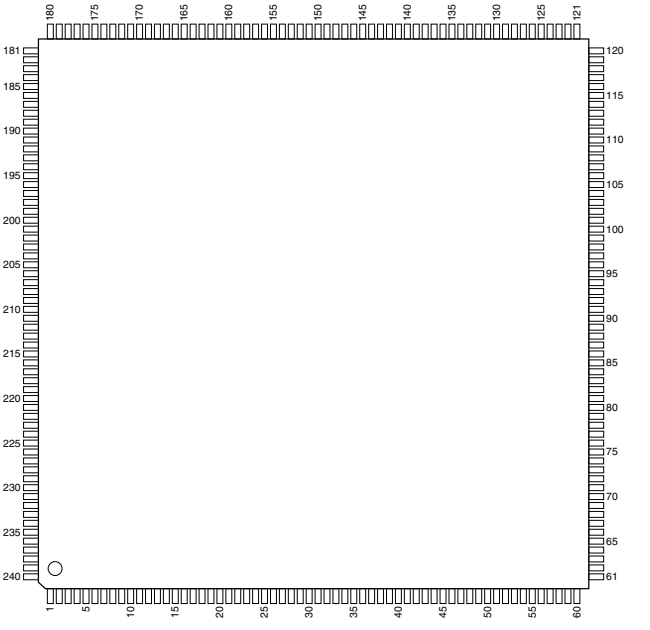

PIN No.	I/O	SIGNAL	PIN No.	I/O	SIGNAL	PIN No.	I/O	SIGNAL	PIN No.	I/O	SIGNAL	PIN No.	I/O	SIGNAL
1	—	GND	49	I	PRIN3	97	O	TXO8	145	O	BCO4	193	I	RXI8
2	—	GND	50	I	PRIN2	98	O	TXO7	146	O	BCO3	194	I	RXI7
3	I	VDI	51	I	PRIN1	99	O	TXO6	147	O	BCO2	195	I	RXI6
4	I	FDIN	52	I	PRIN0	100	—	Vcc	148	O	BCO1	196	I	RXI5
5	I	HDIN	53	I	CLKP	101	—	GND	149	O	BCO0	197	I	RXI4
6	O	CLK2M	54	O	RCHO	102	O	TXO5	150	—	GND	198	I	RXI3
7	I	SKIN	55	O	PRO9	103	O	TXO4	151	O	RRO9	199	I	RXI2
8	I	BIN9	56	O	PRO8	104	O	TXO3	152	O	RRO8	200	—	GND
9	I	BIN8	57	O	PRO7	105	O	TXO2	153	O	RRO7	201	—	Vcc
10	I	BIN7	58	O	PRO6	106	O	TXO1	154	O	RRO6	202	I	RXI1
11	I	BIN6	59	—	GND	107	O	TXO0	155	O	RRO5	203	I	RXI0
12	I	BIN5	60	—	GND	108	O	C54O	156	O	RRO4	204	I	RECCKI
13	I	BIN4	61	—	Vcc	109	—	GND	157	O	RRO3	205	—	Vcc
14	I	BIN3	62	O	PRO5	110	O	TDO	158	O	RRO2	206	I	PLLCKI
15	I	BIN2	63	O	PRO4	111	I	TDI	159	O	RRO1	207	—	GND
16	I	BIN1	64	O	PRO3	112	I	TRSI	160	—	Vcc	208	O	IHPO
17	I	BIN0	65	O	PRO2	113	I	TMSI	161	—	GND	209	O	EXPO
18	I	GIN9	66	O	PRO1	114	I	TCKI	162	O	RRO0	210	I	SCL
19	I	GIN8	67	O	PRO0	115	O	CRCO	163	I	VOCKI	211	O	SDAO
20	—	GND	68	O	C27O	116	I	OCB	164	O	AXO9	212	I	SDAI
21	—	Vcc	69	I	IND3	117	I	PRST	165	O	AXO8	213	I	SLA1
22	I	GIN7	70	I	IND2	118	I	TEB	166	O	AXO7	214	I	SLA0
23	I	GIN6	71	I	IND1	119	I	TSTI	167	O	AXO6	215	O	ADO9
24	I	GIN5	72	I	AXI9	120	—	Vcc	168	O	AXO5	216	O	ADO8
25	I	GIN4	73	I	AXI8	121	—	GND	169	O	AXO4	217	O	ADO7
26	I	GIN3	74	I	AXI7	122	—	GND	170	—	Vcc	218	O	ADO6
27	I	GIN2	75	I	AXI6	123	O	RETF	171	O	AXO3	219	O	ADO5
28	I	GIN1	76	I	AXI5	124	O	RETV	172	O	AXO2	220	—	Vcc
29	I	GIN0	77	I	AXI4	125	O	RETH	173	O	AXO1	221	—	GND
30	I	RIN9	78	I	AXI3	126	—	Vcc	174	O	AXO0	222	O	ADO4
31	I	RIN8	79	I	AXI2	127	O	RTO9	175	O	SKGO	223	O	ADO3
32	I	RIN7	80	—	GND	128	O	RTO8	176	O	IDO3	224	O	ADO2
33	I	RIN6	81	—	Vcc	129	O	RTO7	177	O	IDO2	225	O	ADO1
34	I	RIN5	82	I	AXI1	130	—	GND	178	O	IDO1	226	O	ADO0
35	I	RIN4	83	I	AXI0	131	O	RTO6	179	—	GND	227	O	ADHO
36	I	RIN3	84	I	AXCK	132	O	RTO5	180	—	GND	228	I	ADHI
37	I	RIN2	85	O	TXO19	133	O	RTO4	181	—	Vcc	229	I	ADI9
38	I	RIN1	86	O	TXO18	134	O	RTO3	182	I	RXI19	230	I	ADI8
39	I	RIN0	87	O	TXO17	135	O	RTO2	183	I	RXI18	231	I	ADI7
40	—	Vcc	88	O	TXO16	136	O	RTO1	184	I	RXI17	232	I	ADI6
41	—	GND	89	O	TXO15	137	O	RTO0	185	I	RXI16	233	I	ADI5
42	i	CLKM	90	O	TXO14	138	O	BCO9	186	I	RXI15	234	I	ADI4
43	I	PRIN9	91	O	TXO13	139	—	GND	187	I	RXI14	235	I	ADI3
44	I	PRIN8	92	—	GND	140	—	Vcc	188	I	RXI13	236	I	ADI2
45	I	PRIN7	93	O	TXO12	141	O	BCO8	189	I	RXI12	237	I	ADI1
46	I	PRIN6	94	O	TXO11	142	O	BCO7	190	I	RXI11	238	I	ADI0
47	I	PRIN5	95	O	TXO10	143	O	BCO6	191	I	RXI10	239	O	VCLKO
48	I	PRIN4	96	O	TXO9	144	O	BCO5	192	I	RXI9	240	—	Vcc

INPUTS

ADHI	: AUX. DATA TIMING PULSE (FROM CXD8962)
ADI0 - ADI9	: AUX. DATA (FROM CXD8962)
AXCK	: CLOCK IN FOR AUX. VIDEO
AXI0 - AXI9	: AUX. VIDEO (Y' VIDEO)
BIN0 - BIN9	: B (B-Y,C) VIDEO
CLKM	: VIDEO CLOCK FOR INPUT VIDEO (13.5/18.0/27.0)
CLKP	: 27MHz CLOCK IN FOR PROMPTER VIDEO
FDIN	: FD PULSE
GIN0 - GIN9	: G (Y,YC(27.0)) VIDEO
HDIN	: HD PULSE
IND1 - IND3	: IND. PULSE
OCB	: OUTPUT ENABLE
PLLCKI	: PLL CLOCK 54MHz
PRIN0 - PRIN9	: PROMPTER VIDEO
PRST	: POWER ON RESET
RECCKI	: RECOVERED CLOCK 54MHz
RIN0 - RIN9	: R (R-Y) VIDEO
RXI0 - RXI19	: RECEIVING DATA (54MHz)
SCL,SDAI,SLA0 - SLA1	: IIC
SKIN	: SKINTONE GATE PULSE
TCKI,TDI,TMSI,TRSI	: SELF DIAGNOSIS
TEB	: RAM TEST ENABLE
TSTI	: TEST ENABLE
VDI	: VD PULSE
VOCKI	: VIDEO CLOCK IN FOR OUTPUT

OUTPUTS

ADO0 - ADO9	: AUX. DATA (TO CXD8962)
ADHO	: AUX. DATA TIMING PULSE (TO CXD8962)
AXO0 - AXO9	: AUX. VIDEO (Y' VIDEO)
BCO0 - BCO9	: B VIDEO (B-Y/C)
C27O	: 27MHz CLOCK
C54O	: 54MHz CLOCK FOR TX DATA
CLK2M	: 13.5MHz CLOCK
CRCO	: CRCC COMPARE
EXPO	: EXTERNAL H FOR PLL (COUNT DOWN REC. CLOCK)
IDO1 - IDO3	: IND. PULSE
IHPO	: INTERNAL H FOR PLL
PRO0 - PRO9	: PROMPTER (SDI)
RCHO	: HD FOR RATE CONVERTER (CXD8955)
RETF,RETH,RETV	: RET. FVH PULSE
RTO0 - RTO9	: RETURN VIDEO (G/Y)
RRO0 - RRO9	: R VIDEO (R-Y)
SDAO	: IIC
SKGO	: SKINTONE GATE
TDO	: SELF DIAGNOSIS
TXO0 - TXO19	: TX DATA (54MHz)
VCLKO	: 9MHz CLOCK (FOR CXD8962)

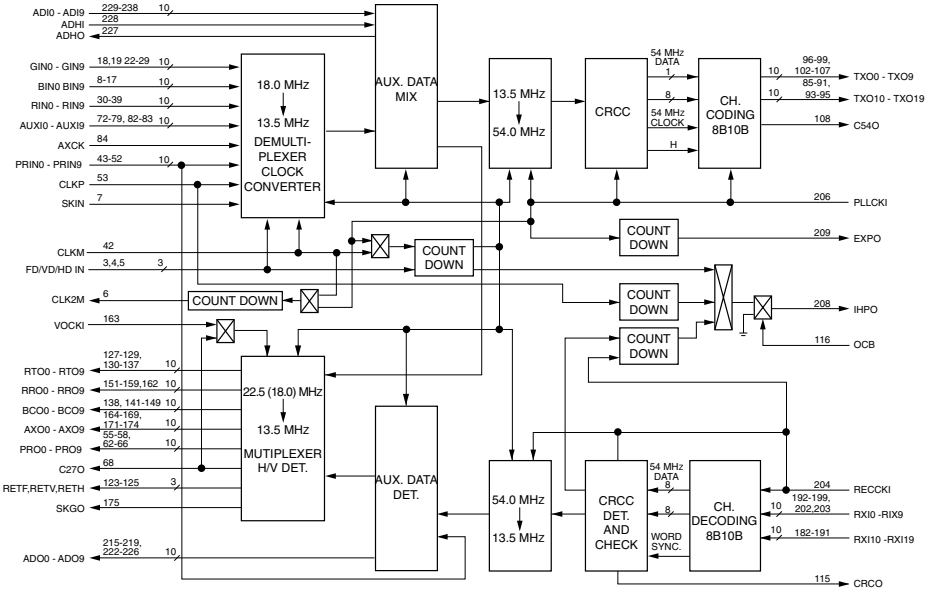

CXD8962R (SONY)

AUX DATA PROCESSOR

—TOP VIEW—

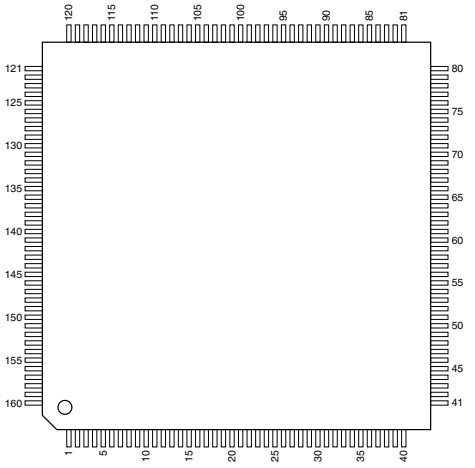

PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL
1	—	VCC	41	—	GND	81	—	VCC	121	—	GND
2	O	AUO1	42	—	GND	82	I	RVI10	122	—	GND
3	I	AUI1	43	I	TCK	83	I	RVI11	123	I	MVI29
4	—	GND	44	I	TRST	84	I	RVI12	124	I	MVI28
5	O	AUO2	45	I	TMS	85	I	RVI13	125	I	MVI27
6	I	AUI2	46	I	TDI	86	I	RVI14	126	I	MVI26
7	—	GND	47	O	TDO	87	I	RVI15	127	I	MVI25
8	O	NCMO	48	—	ZTRS1	88	I	RVI16	128	I	MVI24
9	I	NCMI	49	—	ZTRS0	89	I	RVI17	129	I	MVI23
10	—	GND	50	I	SLA0	90	I	RVI18	130	I	MVI22
11	O	ECMO1	51	I	SCL	91	I	RVI19	131	I	MVI21
12	I	ECMI1	52	I/O	SDA	92	I	RVI20	132	I	MVI20
13	O	ECMO2	53	—	GND	93	I	RVI21	133	I	MVI19
14	I	ECMI2	54	O	FO	94	I	RVI22	134	I	MVI18
15	—	GND	55	O	VO	95	I	RVI23	135	I	MVI17
16	O	ECMO3	56	O	HO	96	I	RVI24	136	I	MVI16
17	I	ECMI3	57	—	GND	97	I	RVI25	137	I	MVI15
18	O	ECMO4	58	O	MVO10	98	I	RVI26	138	I	MVI14
19	I	ECMI4	59	O	MVO11	99	I	RVI27	139	I	MVI13
20	—	VCC	60	O	MVO12	100	—	VCC	140	I	MVI12
21	—	GND	61	O	MVO13	101	—	GND	141	I	MVI11
22	—	TENB	62	O	MVO14	102	I	RVI28	142	I	MVI10
23	—	TRWS	63	O	MVO15	103	I	RVI29	143	—	MTO1
24	—	TWRG	64	O	MVO16	104	I	FI	144	—	MTO2
25	—	TAD54	65	O	MVO17	105	I	VI	145	—	MTO3
26	—	TAD53	66	O	MVO18	106	I	HI	146	—	MTO4
27	—	TAD52	67	O	MVO19	107	—	TIO80	147	—	MTO5
28	—	TAD51	68	—	GND	108	—	TIO81	148	—	MTO6
29	—	TAD50	69	O	MVO20	109	—	TIO82	149	—	MTO7
30	—	GND	70	O	MVO21	110	—	TIO83	150	—	MTO8
31	I	LRCK2	71	O	MVO22	111	—	TIO84	151	—	MTO9
32	I	LRCK1	72	O	MVO23	112	—	TIO85	152	—	MTO10
33	I	BCK2	73	O	MVO24	113	—	TIO86	153	—	MTO11
34	I	BCK1	74	O	MVO25	114	—	TIO87	154	—	MTO12
35	—	GND	75	O	MVO26	115	I	MTI	155	—	MTO13
36	I	CCLK	76	O	MVO27	116	I	MTE	156	—	MTO14
37	—	GND	77	O	MVO28	117	I	NC	157	—	NC
38	I	VCLK	78	O	MVO29	118	I	VMV	158	—	NC
39	I	RES	79	—	GND	119	I	HMV	159	—	GND
40	—	VCC	80	—	GND	120	—	VCC	160	—	GND

INPUTS

AUI1	: PGM 1/2
AUI2	: INCOM 1/2
BCK1 - BCK2	: 64 LRCK1 - 64 LRCK2
CCLK	: 9MHz NEW CMD CLOCK
ECMI1 - ECMI4	: EXT CMD1 - EXT CMD4
FI	: RET F
HI	: RET H
HMV	: MAIN VIDEO H
LRCK1	: 48K AUDIO1 CLOCK
LRCK2	: 24K AUDIO2 CLOCK
MTE,MTI	: MEM TEST (OPEN)
MVI10 - MVI19	: MAIN B (C) MSB
MVI20 - MVI29	: MAIN G (Y) MSB
NCMI	: NEW CMD
RES	: POWER ON RESET
RVI10 - RVI19	: RET C LSB
RVI20 - RVI29	: RET Y LSB
SCL	: IIC CLOCK
SLA0	: IIC ADDRESS (OPEN)
TCK	: BS CLOCK
TDI	: BS DATA
TMS	: BS MODE SELECT
TRST	: BS RESET
VCLK	: 13.5MHz VIDEO CLOCK
VMV	: MAIN VIDEO V
VI	: RET V

OUTPUTS

AUO1	: MIC 1/2
AUO2	: INCOM 1/2
ECMO1 - ECMO4	: EXT CMD1 - EXT CMD4
FO	: MIX F
HO	: MIX H
MVO10 - MVO19	: M-RET C LSB
MVO20 - MVO29	: M-RET Y LSB
NCMO	: NEW CMD
TDO	: BS DATA
VO	: MIX V

INPUT/OUTPUT

SDA	: IIC DATA

OTHERS

NC	: NO CONNECTION
MTO1 - MTO14	: MEM TEST (NC)
TAD50 - TAD54	: TEST (OPEN)
TENB,TRWS,TWRG	: TEST (OPEN)
TIO80 - TIO87	: TEST (NC)
ZTRS0 - ZTRS1	: TEST

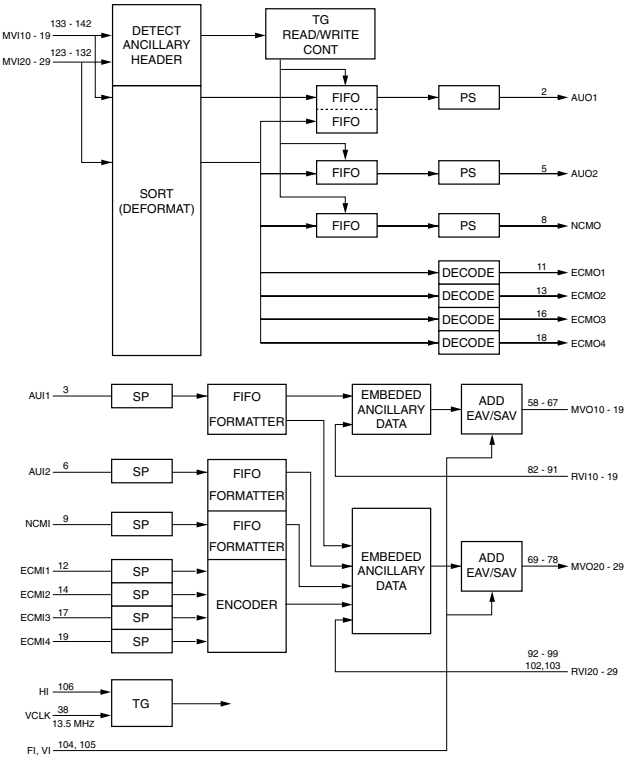

CXD8963R (SONY)

MATRIX ENCODER
—TOP VIEW—

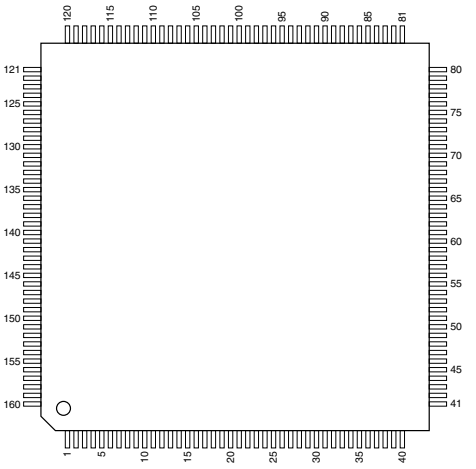

PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL
1	—	Vcc	41	—	GND	81	—	Vcc	121	—	GND
2	I	AUXD15	42	—	GND	82	O	WFM3	122	—	GND
3	I	AUXD14	43	O	LINKB3	83	O	WFM2	123	I	CK13
4	I	AUXD13	44	O	LINKB2	84	O	WFM1	124	I	BY0
5	I	AUXD12	45	O	LINKB1	85	O	WFM0	125	I	BY1
6	I	AUXD11	46	O	LINKB0	86	—	GND	126	I	BY2
7	I	AUXD10	47	O	LINKA9	87	O	D2VD	127	I	BY3
8	I	AUXHD2	48	O	LINKA8	88	O	D2HD	128	I	BY4
9	I	AUXD29	49	O	LINKA7	89	O	TDMO	129	I	BY5
10	I	AUXD28	50	—	GND	90	I	TCK	130	I	BY6
11	I	AUXD27	51	O	LINKA6	91	I	TMS	131	I	BY7
12	I	AUXD26	52	O	LINKA5	92	I	TRS	132	I	BY8
13	I	AUXD25	53	O	LINKA4	93	I	TDI	133	I	BY9
14	I	AUXD24	54	O	LINKA3	94	I/O	SDA	134	I	Y0
15	I	AUXD23	55	O	LINKA2	95	I	SCL	135	I	Y1
16	I	AUXD22	56	O	LINKA1	96	I	SLA1	136	I	Y2
17	I	AUXD21	57	O	LINKA0	97	I	SLA0	137	I	Y3
18	I	AUXD20	58	O	FLDO	98	I	POR	138	I	Y4
19	I	AUXHD3	59	O	VDO	99	—	TST	139	I	Y5
20	—	Vcc	60	—	GND	100	—	Vcc	140	I	Y6
21	—	GND	61	O	HDO	101	—	GND	141	I	Y7
22	I	AUXD39	62	O	MON9	102	I	FLDIN	142	I	Y8
23	I	AUXD38	63	O	MON8	103	I	VDIN	143	I	Y9
24	I	AUXD37	64	O	MON7	104	I	HDIN	144	I	RY0
25	I	AUXD36	65	O	MON6	105	I	IND	145	I	RY1
26	I	AUXD35	66	O	MON5	106	I	CHAR	146	I	RY2
27	I	AUXD34	67	O	MON4	107	I	CHBLK	147	I	RY3
28	I	AUXD33	68	O	MON3	108	I	KEY9	148	I	RY4
29	I	AUXD32	69	O	MON2	109	I	KEY8	149	I	RY5
30	I	AUXD31	70	—	GND	110	I	KEY7	150	I	RY6
31	I	AUXD30	71	O	MON1	111	I	KEY6	151	I	RY7
32	O	SYNC1	72	O	MON0	112	I	KEY5	152	I	RY8
33	O	SYNC2	73	O	WFM9	113	I	KEY4	153	I	RY9
34	O	LINKB9	74	O	WFM8	114	I	KEY3	154	I	AUXHD1
35	O	LINKB8	75	O	WFM7	115	I	KEY2	155	I	AUXD19
36	O	LINKB7	76	O	WFM6	116	I	KEY1	156	I	AUXD18
37	O	LINKB6	77	O	WFM5	117	I	KEY0	157	I	AUXD17
38	O	LINKB5	78	O	WFM4	118	I	OCB	158	I	AUXD16
39	O	LINKB4	79	—	GND	119	I	CK27	159	—	GND
40	—	Vcc	80	—	GND	120	—	Vcc	160	—	GND

INPUTS

AUXHD1	: DATA TIMING FOR MON OUTPUT
AUXHD2	: DATA TIMING FOR WFM
AUXHD3	: DATA TIMING FOR LINKA AND LINKB
AUXD10 - AUXD19	: ADDITIONAL DATA FOR MON OUTPUT
AUXD20 - AUXD29	: ADDITIONAL DATA FOR WFM OUTPUT
AUXD30 - AUXD39	: ADDITIONAL DATA FOR LINKA AND LINKB
BY0 - BY9	: Y/G VIDEO
CK13	: 13.5MHz CLOCK
CK27	: 27MHz CLOCK
CHBLK	: CHARACTOR BLANKING
CHAR	: CHARACTOR
FLDIN	: FLD
HDIN	: HD
IND	: EXTERNAL INDICATOR
KEY0 - KEY9	: KEY SIGNAL
OCB	: OUTPUT HIGH FOR Z
POR	: PIN FOR IIC
SCL	: PIN FOR IIC
SLA0 - SLA1	: PIN FOR IIC
RY0 - RY9	: B-Y/B VIDEO
TCK,TDI,TMS,TRS	: SELF DIAGNOSIS
VDIN	: VD
Y0 - Y9	: R-Y/R VIDEO

OUTPUTS

D2HD	: HD FOR D2
D2VD	: VD FOR D2
FLDO	: FLD
HDO	: HD
LINKA0 - LINKA9	: LINK A (SDI)
LINKB0 - LINKB9	: LINK B (SDI)
MON0 - MON9	: MON (SDI)
SYNC1 - SYNC2	: READ TIMING FOR AUX DATA
TDMO	: SELF DIAGNOSIS
VDO	: VD
WFM0 - WFM9	: WFM (SDI)

INPUT/OUTPUT

SDA	: PIN FOR IIC

OTHER

TST	: TEST

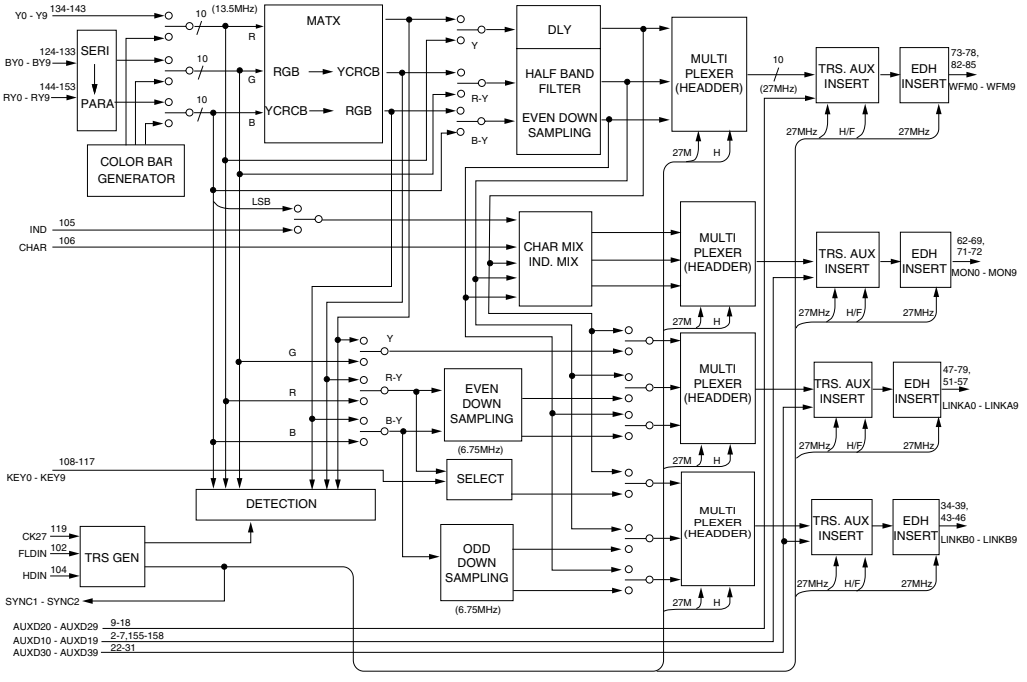

CXD8964R (SONY)

VIDEO TIMING GENERATOR

—TOP VIEW—

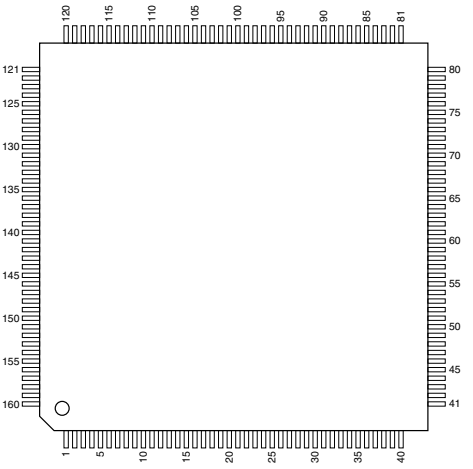

INPUTS

ACLK	:	ANALOG RETURN CLOCK
ARET_IN0 - ARET_IN9	:	ANALOG RETURN (5V BUFFER)
BI0 - BI7	:	8 BIT (B CH)
CF	:	ANALOG RETURN CF
CK27	:	27MHz CLOCK (5V BUFFER)
CLR	:	POWER ON RESET
GI0 - GI7	:	8 BIT (G CH)
MATX_H	:	YMIX H
MATX_V	:	YMIX V
MYIN0 - MYIN9	:	YMIX Y (5V BUFFER)
NP_SEL	:	NTSC/PAL OUTPUT
PROMPTER	:	5V BUFFER PROMPTER
PSSEL	:	IIC PARALLEL/SERIAL
RET1_IN0 - RET1_IN9	:	RETURN1 (5V BUFFER)
RET2_IN0 - RET2_IN9	:	RETURN2 (5V BUFFER)
SCK27_1	:	5V BUFFER RETURN CLOCK1
SCK27_2	:	5V BUFFER RETURN CLOCK2
SCL	:	IIC
SLA0 - SLA1	:	IIC ADDRESS
SYNC_HD	:	ANALOG RETURN SYNC OR HD
SYNCI	:	5V BUFFER REFERENCE SYNC
TCK,TDI,TMS,TRST	:	SELF DIAGNOSIS
TEB	:	RAM TEST
TEST_FG	:	TEST
VD	:	ANALOG RETURN VD
VSEL	:	SYSTEM V/FGEN V

OUTPUTS

AD0 - AD10	:	YMIX BUFFER MEMORY ADDRESS
AN_DG	:	REFERENCE ANALOG/DIGITAL MODE
CFLD	:	FIELD1 PULSE
CK9	:	9MHz
CK13	:	13.5MHz
CK27O	:	27MHz
CO0 - CO9	:	RETURN CRCB
EXT_INT	:	REFERENCE EXT/INT
PLL_HD	:	PLL OUTPUT H
PMPF	:	PROMPTER F
PMPH	:	PROMPTER H
REF_HR	:	REFERENCE H
RETURN_F	:	SYNC RETURN F
RETURN_H	:	SYNC RETURN H
RETURN_V	:	SYNC RETURN V
RRES	:	RETURN BUFFER MEM READ CLEAR PULSE
SYSTEM_F	:	SYNC F
SYSTEM_H	:	SYNC H
SYSTEM_V	:	SYNC V
TDO	:	SELF DIAGNOSIS
VCMP	:	V PHASE COMPARE
WRES	:	RETURN BUFFER MEM WRITE CLEAR PULSE
YO0 - YO9	:	RETURN Y

INPUT/OUTPUT

SDA	:	IIC

OTHERS

CF0 - CF2	:	TEST OUTPUT
FF	:	TEST OUTPUT
WE	:	TEST OUTPUT

PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL
1	—	Vcc	41	—	GND	81	—	Vcc	121	—	GND
2	I	BI4	42	—	GND	82	I	VD	122	—	GND
3	I	BI5	43	I	SCK27_1	83	I	ACLK	123	O	SYSTEM_F
4	I	BI6	44	I	RET1_IN0	84	I	SYNC_HD	124	O	SYSTEM_V
5	I	BI7	45	I	RET1_IN1	85	I	CF	125	O	SYSTEM_H
6	I	GI0	46	I	RET1_IN2	86	—	CF2	126	O	CFLD
7	I	GI1	47	I	RET1_IN3	87	—	CF1	127	O	WRES
8	I	GI2	48	I	RET1_IN4	88	—	CF0	128	O	RRES
9	I	GI3	49	I	RET1_IN5	89	I	PSSEL	129	O	RETURN_H
10	I	GI4	50	I	RET1_IN6	90	I	VSEL	130	O	RETURN_V
11	I	GI5	51	I	RET1_IN7	91	I/O	SDA	131	O	RETURN_F
12	I	GI6	52	I	RET1_IN8	92	I	SCL	132	—	Vcc
13	I	GI7	53	I	RET1_IN9	93	I	SLA1	133	—	GND
14	I	MATX_H	54	I	RET2_IN0	94	I	SLA0	134	O	YO9
15	I	MATX_V	55	I	RET2_IN1	95	I	TDI	135	O	YO8
16	I	MYIN9	56	I	RET2_IN2	96	I	TMS	136	O	YO7
17	I	MYIN8	57	I	RET2_IN3	97	I	TRST	137	O	YO6
18	I	MYIN7	58	I	RET2_IN4	98	I	TCK	138	O	YO5
19	I	MYIN6	59	I	RET2_IN5	99	O	TDO	139	O	YO4
20	—	Vcc	60	I	RET2_IN6	100	—	Vcc	140	O	YO3
21	—	GND	61	I	RET2_IN7	101	—	GND	141	O	YO2
22	I	MYIN5	62	I	RET2_IN8	102	I	CK27	142	O	YO1
23	I	MYIN4	63	I	RET2_IN9	103	—	GND	143	O	YO0
24	I	MYIN3	64	—	GND	104	I	SYNCI	144	—	GND
25	I	MYIN2	65	I	SCK27_2	105	O	CK9	145	O	CO9
26	I	MYIN1	66	O	PMPH	106	—	GND	146	O	CO8
27	I	MYIN0	67	O	PMPF	107	O	CK27O	147	O	CO7
28	—	GND	68	I	PROMPTER	108	I	TEST_FG	148	O	CO6
29	O	AD10	69	I	ARET_IN0	109	I	TEB	149	O	CO5
30	O	AD9	70	I	ARET_IN1	110	—	FF	150	O	CO4
31	O	AD8	71	I	ARET_IN2	111	O	AN_DG	151	O	CO3
32	O	AD7	72	I	ARET_IN3	112	O	CK13	152	O	CO2
33	O	AD6	73	I	ARET_IN4	113	I	NP_SEL	153	O	CO1
34	O	AD5	74	I	ARET_IN5	114	I	CLR	154	O	CO0
35	O	AD4	75	I	ARET_IN6	115	O	PLL_HD	155	I	BI0
36	O	AD3	76	I	ARET_IN7	116	O	EXT_INT	156	I	BI1
37	O	AD2	77	I	ARET_IN8	117	O	REF_HR	157	I	BI2
38	O	AD1	78	I	ARET_IN9	118	O	VCMP	158	I	BI3
39	O	AD0	79	—	GND	119	—	WE	159	—	GND
40	—	Vcc	80	—	GND	120	—	Vcc	160	—	GND

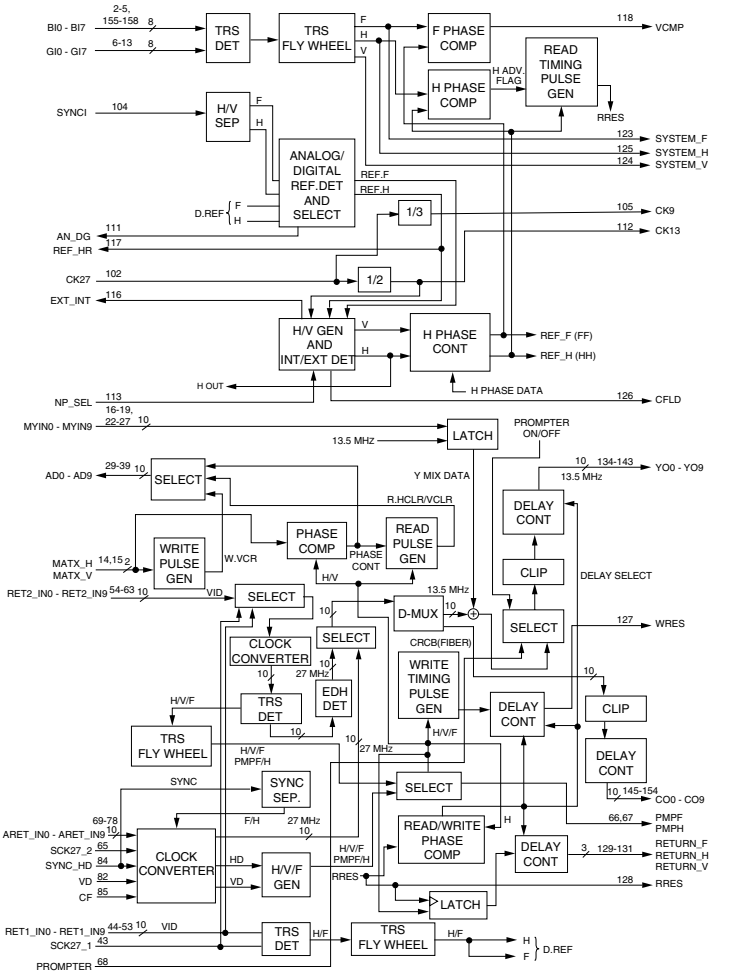

CXD8966R (SONY)

MONITOR SELECT
—TOP VIEW—

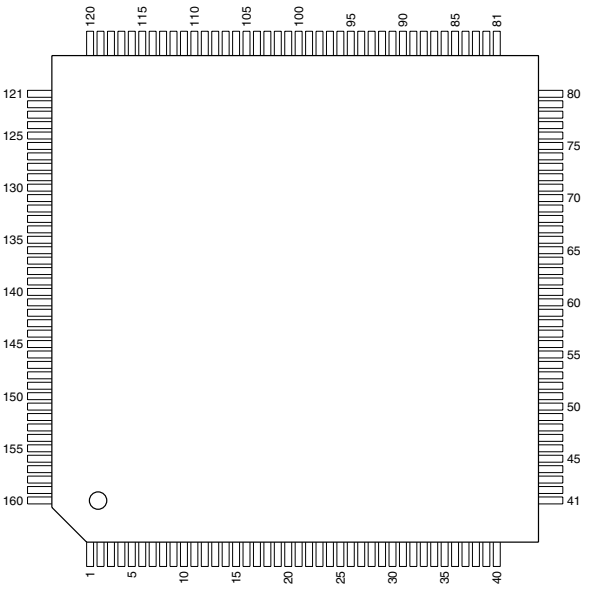

PIN No.	I/O	SIGNAL	PIN No.	I/O	SIGNAL	PIN No.	I/O	SIGNAL	PIN No.	I/O	SIGNAL
1	—	VCC	41	—	GND	81	—	VCC	121	—	GND
2	I	VD	42	—	GND	82	I	TRST	122	—	GND
3	I	RIN9	43	O	RYO9	83	I	TCK	123	I/O	SDA
4	I	RIN8	44	O	RYO8	84	I	TMS	124	I	SCL
5	I	RIN7	45	O	RYO7	85	I	TDI	125	I	SLA1
6	I	RIN6	46	O	RYO6	86	—	GND	126	I	SLA0
7	I	RIN5	47	O	RYO5	87	O	TDO	127	I	ARCH
8	I	RIN4	48	O	RYO4	88	O	WF0	128	I	ARCB
9	I	RIN3	49	O	RYO3	89	O	WF1	129	I	ARDT
10	I	RIN2	50	O	RYO2	90	O	WF2	130	—	TSHB
11	I	RIN1	51	—	GND	91	O	WF3	131	—	TSVB
12	I	RIN0	52	—	VCC	92	O	WF4	132	—	TS2FH
13	I	GIN9	53	O	RYO1	93	—	GND	133	—	TSINSW
14	I	GIN8	54	O	RYO0	94	O	WF5	134	I	MBYIN0
15	I	GIN7	55	O	GYO9	95	O	WF6	135	I	MBYIN1
16	I	GIN6	56	O	GYO8	96	O	WF7	136	I	MBYIN2
17	I	GIN5	57	O	GYO7	97	O	WF8	137	I	MBYIN3
18	I	GIN4	58	O	GYO6	98	O	WF9	138	I	MBYIN4
19	I	GIN3	59	O	GYO5	99	O	FIELD1	139	I	MBYIN5
20	—	VCC	60	O	GYO4	100	—	VCC	140	I	MBYIN6
21	—	GND	61	—	GND	101	—	GND	141	I	MBYIN7
22	I	GIN2	62	—	VCC	102	O	STAIR0	142	I	MBYIN8
23	I	GIN1	63	O	GYO3	103	O	STAIR1	143	I	MBYIN9
24	I	GIN0	64	O	GYO2	104	O	$\overline{\text{SEQO}}$	144	I	MRYIN0
25	I	BIN9	65	O	GYO1	105	O	LALT	145	I	MRYIN1
26	I	BIN8	66	O	GYO0	106	O	SYNC	146	I	MRYIN2
27	I	BIN7	67	O	BYO9	107	O	PIX0	147	I	MRYIN3
28	I	BIN6	68	O	BYO8	108	O	PIX1	148	I	MRYIN4
29	I	BIN5	69	O	BYO7	109	—	VCC	149	I	MRYIN5
30	I	BIN4	70	O	BYO6	110	—	GND	150	I	MRYIN6
31	I	BIN3	71	—	GND	111	O	PIX2	151	I	MRYIN7
32	I	BIN2	72	—	VCC	112	O	PIX3	152	I	MRYIN8
33	I	BIN1	73	O	BYO5	113	O	PIX4	153	I	MRYIN9
34	I	BIN0	74	O	BYO4	114	O	PIX5	154	I	OENBT
35	—	GND	75	O	BYO3	115	O	PIX6	155	I	OENPX
36	I	FLD1	76	O	BYO2	116	O	PIX7	156	I	OENWF
37	—	GND	77	O	BYO1	117	O	PIX8	157	I	HD
38	I	PORS	78	O	BYO0	118	O	PIX9	158	I	FLD
39	I	CLK	79	—	GND	119	—	GND	159	—	GND
40	—	VCC	80	—	GND	120	—	VCC	160	—	GND

INPUTS

ARCB	: CHARACTOR BG PULSE
ARCH	: CHARACTOR PULSE
ARDT	: AREA DETECT PULSE
BIN0 - BIN9	: INPUT VIDEO DATA (B/B-Y)
CLK	: SYSTEM CLOCK (13.5MHz)
FLD	: FIELD PULSE
FLD1	: FIELD1 PULSE
GIN0 - GIN9	: INPUT VIDEO DATA (G/Y)
HD	: H PULSE
MBYIN0 - MBYIN9	: MONO COLOR R-Y DATA
MRYIN0 - MRYIN9	: MONO COLOR B-Y DATA
OENBT	: OUTPUT ENABLE (COMPONENT OUT)
OENPX	: OUTPUT ENABLE (PIX OUT)
OENWF	: OUTPUT ENABLE (WF OUT)
PORS	: POWER ON RESET
RIN0 - RIN9	: INPUT VIDEO DATA (R/R-Y)
SCL	: IIC CLOCK
SLA0 - SLA1	: IIC ADDRESS
TCK	: JTAG CLOCK
TDI	: JTAG TDI
TMS	: JTAG TMS
TRST	: JTAG TRST
VD	: V PULSE

OUTPUTS

BYO0 - BYO9	: COMPONENT (B/B-Y)
FIELD1	: FIELD1 PULSE
GYO0 - GYO9	: COMPONENT (G/Y)
LALT	: LINE ACT ENABLE PULSE (PAL)
PIX0 - PIX9	: PIX MONITOR
RYO0 - RYO9	: COMPONENT (R/R-Y)
$\overline{\text{SEQO}}$	: SEQUENTIAL CONTROL
STAIR0 - STAIR1	: WF STAIR PULSE
SYNC	: SYNC
TDO	: JTAG TDO
WF0 - WF9	: WF MONITOR

INPUT/OUTPUT

SDA	: IIC DATA

OTHERS

TS2FH,TSHB,TSINSW,TSVB	: TEST PIN

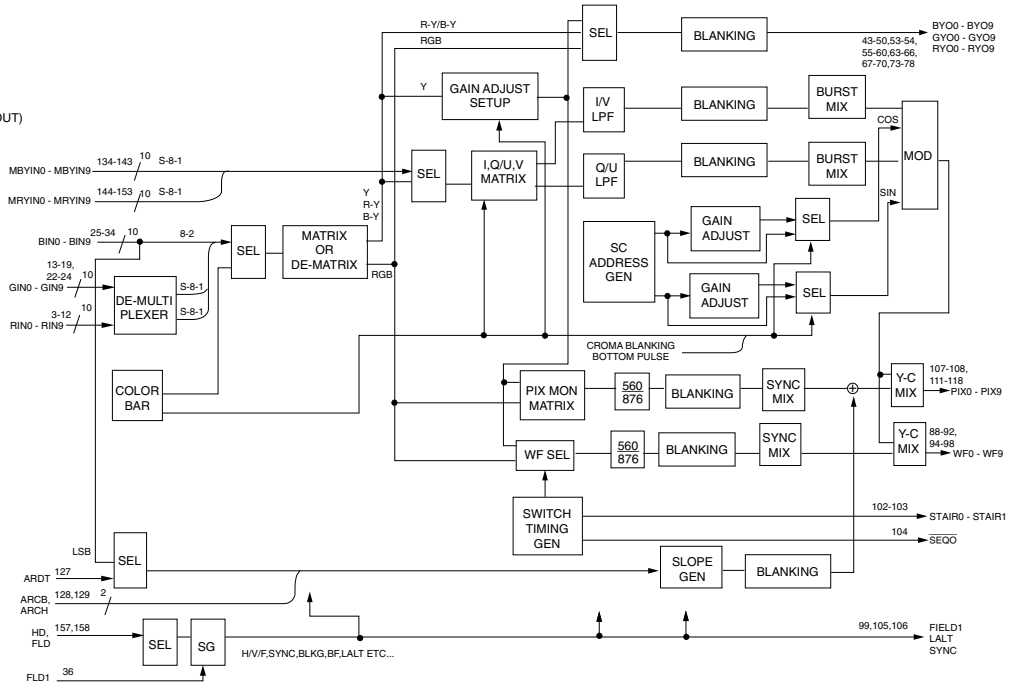

CXD8967R (SONY)

SATURATION CONTROLLER

—TOP VIEW—

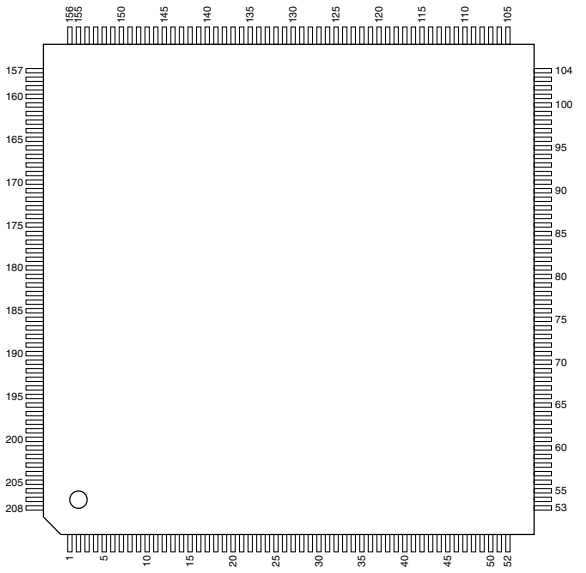

PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL
1	—	GND	43	O	YY6	85	—	Vcc	127	—	TPD5	169	I	RI0
2	—	GND	44	O	YY5	86	O	B14	128	—	TPD4	170	I	RI1
3	O	R29	45	—	Vcc	87	O	B13	129	—	TPD3	171	I	RI2
4	O	R28	46	O	YY4	88	O	B12	130	—	Vcc	172	I	RI3
5	O	R27	47	O	YY3	89	O	B11	131	—	GND	173	I	RI4
6	O	R26	48	O	YY2	90	O	B10	132	—	TPD2	174	I	RI5
7	O	R25	49	O	YY1	91	—	GND	133	—	TPD1	175	I	RI6
8	—	Vcc	50	O	YY0	92	I	FIN	134	—	TPD0	176	I	RI7
9	O	R24	51	—	GND	93	I	VIN	135	—	Vcc	177	I	RI8
10	O	R23	52	—	GND	94	I	HIN	136	—	TPW	178	I	RI9
11	O	R22	53	—	Vcc	95	—	GND	137	—	TPBT	179	—	GND
12	O	R21	54	O	R19	96	O	FO	138	—	TPDS	180	I	GI0
13	O	R20	55	O	R18	97	O	VO	139	—	GND	181	I	GI1
14	—	GND	56	O	R17	98	O	HO	140	I	PRST	182	—	GND
15	O	G29	57	O	R16	99	—	GND	141	I	TRST	183	—	Vcc
16	O	G28	58	O	R15	100	I	CK13	142	I	TDI	184	I	GI2
17	O	G27	59	—	GND	101	—	GND	143	I	TCK	185	I	GI3
18	O	G26	60	O	R14	102	I	CK27	144	I	TMS	186	I	GI4
19	O	G25	61	O	R13	103	—	Vcc	145	O	TDO	187	I	GI5
20	—	Vcc	62	O	R12	104	—	Vcc	146	—	Vcc	188	I	GI6
21	O	G24	63	O	R11	105	—	GND	147	I	SLA1	189	I	GI7
22	O	G23	64	O	R10	106	—	GND	148	I	SCL	190	I	GI8
23	O	G22	65	—	GND	107	I	GTI	149	I	SDAI	191	I	GI9
24	O	G21	66	O	G19	108	O	GTO	150	O	SDAO	192	—	GND
25	O	G20	67	O	G18	109	—	TPAT	151	—	GND	193	—	Vcc
26	—	GND	68	O	G17	110	—	TPA9	152	I	CKSL	194	I	BI0
27	—	Vcc	69	O	G16	111	—	TPA8	153	I	FHSL	195	I	BI1
28	O	B29	70	O	G15	112	—	TPA7	154	I	NPSL	196	I	BI2
29	O	B28	71	—	Vcc	113	—	TPA6	155	—	GND	197	I	BI3
30	O	B27	72	O	G14	114	—	TPA5	156	—	GND	198	I	BI4
31	O	B26	73	O	G13	115	—	TPA4	157	—	Vcc	199	I	BI5
32	O	B25	74	O	G12	116	—	TPA3	158	I	YYI0	200	I	BI6
33	—	GND	75	O	G11	117	—	TPA2	159	I	YYI1	201	I	BI7
34	O	B24	76	O	G10	118	—	TPA1	160	I	YYI2	202	I	BI8
35	O	B23	77	—	GND	119	—	TPA0	161	I	YYI3	203	I	BI9
36	O	B22	78	—	Vcc	120	—	TPSEL	162	I	YYI4	204	I	VLTST
37	O	B21	79	—	GND	121	—	Vcc	163	I	YYI5	205	—	GND
38	O	B20	80	O	B19	122	—	TPD9	164	I	YYI6	206	—	GND
39	—	GND	81	O	B18	123	—	TPD8	165	I	YYI7	207	—	GND
40	O	YY9	82	O	B17	124	—	GND	166	I	YYI8	208	—	Vcc
41	O	YY8	83	O	B16	125	—	TPD7	167	I	YYI9			
42	O	YY7	84	O	B15	126	—	TPD6	168	—	GND			

INPUTS

BI0 - BI9	: B/CB
CK13	: 13.5MHz/18MHz CLOCK
CK27	: 27MHz/36MHz CLOCK
CKSL	: 13.5MHz/18MHz SELECT
FHSL	: TRS/$\overline{\text{FVH}}$ SELECT
FIN	: SYNC F
GI0 - GI9	: G/Y
GTI	: SKINTONE GATE PULSE
HIN	: SYNC H
NPSL	: $\overline{\text{NTSC}}$/PAL SELECT
PRST	: POWER ON RESET
RI0 - RI9	: R/CR
SCL	: IIC CLOCK
SDAI	: IIC DATA OUT
SLA1	: IIC ADDRESS1
TCK,TDI,TMS,TRST	: SELF DIAGNOSIS
VIN	: SYNC V
VLTST	: VLATCH TEST ON/$\overline{\text{OFF}}$
YYI0 - YYI9	: 27MHz ('Y)

OUTPUTS

B10 - B19	: B/CB MONITOR
B20 - B29	: B/CB
FO	: SYNC F
G10 - G19	: G/Y MONITOR
G20 - G29	: G/Y
GTO	: GATE PULSE (MONITOR)
HO	: SYNC H
R10 - R19	: R/CR MONITOR
R20 - R29	: R/CR
SDAO	: IIC DATA
TDO	: SELF DIAGNOSIS
VO	: SYNC V
YY0 - YY9	: 27MHz ('Y)

OTHERS

TPA0 - TPA9	: TEST PIN (IIC ADDRESS PARA)
TPAT,TPBT,TPDS	: TEST PIN
TPD0 - TPD9	: TEST PIN (IIC DATA)
TPSEL	: TEST PIN (IIC P/S SELECT)
TPW	: TEST PIN (IIC PARA W GATE)

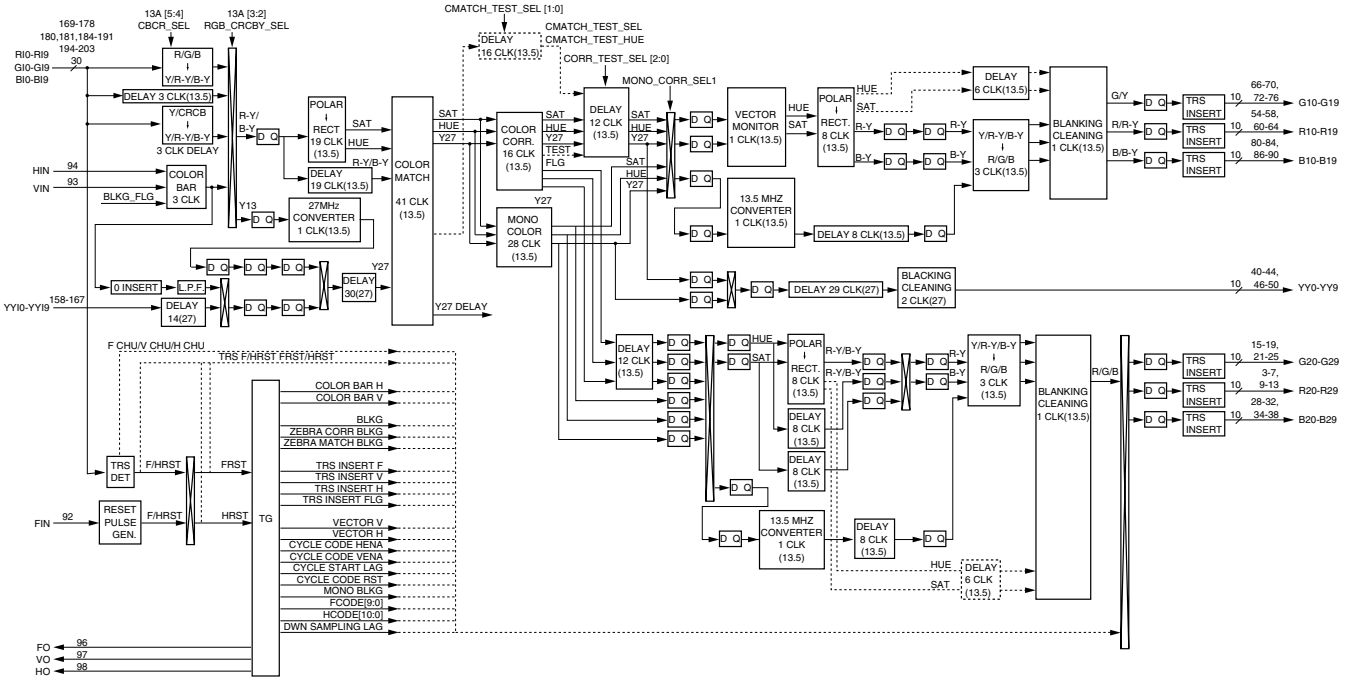

MSM6685JSDR1 (OKI)

8,388,608-WORDS × 1-BIT SERIAL REGISTER

—TOP VIEW—

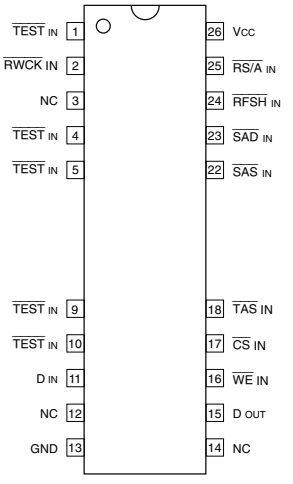

INPUTS

$\overline{CS}$	:	CHIP SELECT
D IN	:	DATA
$\overline{RFSH}$	:	REFRESH CLOCK
$\overline{RS/A}$	:	SELF/AUTO REFRESH SELECT
$\overline{RWCK}$	:	READ WRITE CLOCK
$\overline{SAD}$	:	SERIAL ADDRESS DATA
$\overline{SAS}$	:	SERIAL ADDRESS STROBE
$\overline{TAS}$	:	TRANSFER ADDRESS STROBE
$\overline{WE}$	:	WRITE ENABLE

OUTPUT

D OUT	:	DATA

OTHERS

NC	:	NO CONNECTION
$\overline{TEST}$	:	TEST

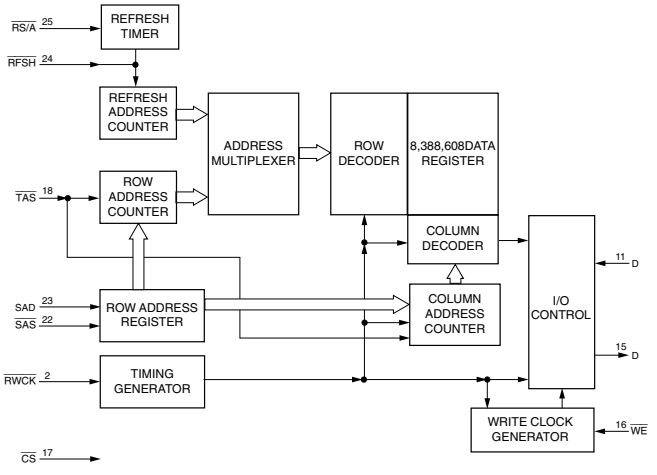

MSM6688GS-2K (OKI)

ADPCM SYSTEM RECORDING/PLAY BACK LSI
—TOP VIEW—

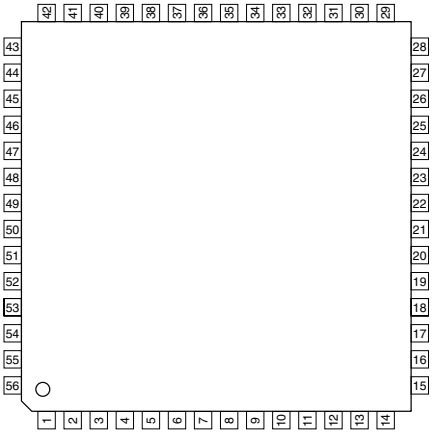

PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL
1	I	CA0	15	I	ROM	29	—	AGND	43	O	$\overline{CS4}$
2	I	CA1	16	I	ADIN	30	—	DGND	44	I/O	DI/O
3	I	CA2	17	O	FOUT	31	I	RSEL1	45	I	DROM
4	I	CA3	18	O	AOUT	32	I	RSEL2	46	O	$\overline{WE}$
5	I	CA4	19	I	FIN	33	I	$\overline{TEST}$	47	I	$\overline{XT}$
6	I	CA5	20	O	AMON	34	I	TEST	48	O	$\overline{XT}$
7	I	$\overline{DEL}$	21	—	D.Vcc	35	I	$\overline{PDWN}$	49	—	D.Vcc
8	I	$\overline{PAUSE}$	22	—	A.Vcc	36	O	$\overline{SAS}$	50	O	$\overline{RWCK}$
9	I	PDMD	23	O	SG	37	O	$\overline{TAS}$	51	O	MON
10	I	MCUM	24	O	SGC	38	O	SADY	52	O	NAR
11	I	SAM1	25	O	LOUT	39	O	SADX	53	I	RESET
12	I	SAM2	26	I	LIN	40	O	$\overline{CS1}$	54	I	$\overline{SP}$
13	I	4B/$\overline{3B}$	27	O	MOUT	41	O	$\overline{CS2}$	55	I	$\overline{ST}$
14	I	VDS	28	I	MIN	42	O	$\overline{CS3}$	56	I	REC/$\overline{PLAY}$

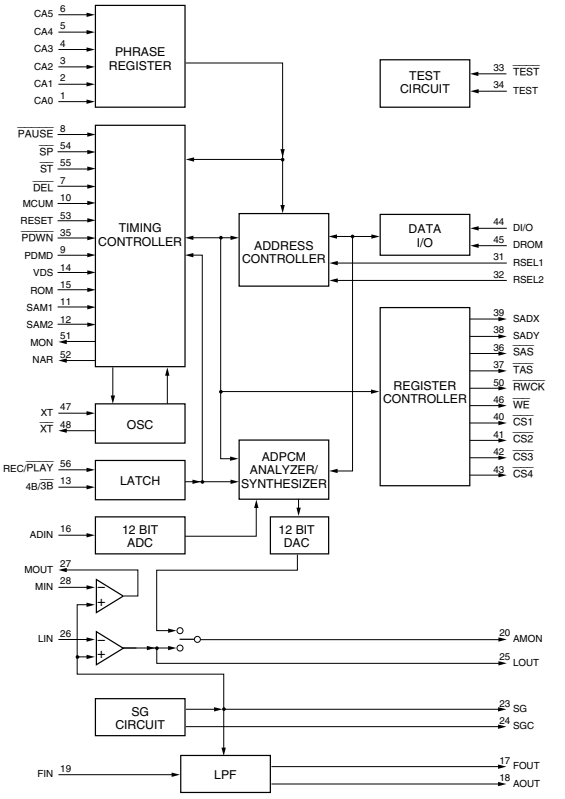

INPUTS

4B/$\overline{3B}$	:	ADPCM BIT LENGHT SELECT
ADIN	:	INTERNAL 12 - BIT AD CONVERTER
CA0 - CA5	:	SPECIFY PHRASE
$\overline{DEL}$	:	FULL/SPECIFY PHRASE ERASE
DROM	:	DATA ROM
FIN	:	INTERNAL LOW PASS FILTER
LIN	:	INTERNAL OP AMP INVERSION
MCUM	:	STAND ALONE/MICROCOMPUTER INTERFACE MODE SELECT
MIN	:	INTERNAL OP AMP INVERSION
$\overline{PAUSE}$	:	REC PLAY BACK/ROM PLAY BACK PAUSE
PDMD	:	POWER DOWN MODE SELECT
$\overline{PDWN}$	:	POWER DOWN
REC/$\overline{PLAY}$	:	REC/PLAY MODE SELECT
RESET	:	RESET
ROM	:	REC PLAY BACK/ROM PLAY BACK SELECT
RSEL1 - RESL2	:	REGISTER SELECT
SAM1 - SAM2	:	SAMPLING FREQUENCY SELECT
$\overline{SP}$	:	REC PLAY BACK/ROM PLAY BACK STOP
$\overline{ST}$	:	REC PLAY BACK/ROM PLAY BACK START
VDS	:	VOICE DETECTOR SELECT
XT	:	CLOCK OSCILLATOR

OUTPUTS

AMON	:	REC MODE : LOUT/PLAY BACK MODE : DA CONV.
AOUT	:	INTERNAL LOW PASS FILTER
$\overline{CS1}$ - $\overline{CS4}$	:	CHIP SELECT
FOUT	:	INTERNAL LOW PASS FILTER
LOUT	:	INTERNAL OP AMP
MON	:	REC OR PLAY BACK MODE : HIGH LEVEL OUTPUT
MOUT	:	INTERNAL OP AMP
NAR	:	ENABLE/DISABLE OF SPECIFY PHRASE
$\overline{RWCK}$	:	READ/WRITE CLOCK
SADX,SADY	:	SERIAL ADDRESS DATA
$\overline{SAS}$	:	SERIAL ADDRESS STROBE
SG,SGC	:	ANALOG CIRCUIT REFERENCE VOLTAGE
$\overline{TAS}$	:	TRANSFER ADDRESS STROBE
$\overline{WE}$	:	WRITE ENABLE
$\overline{XT}$	:	CLOCK OSCILLATOR

INPUT/OUTPUT

DI/O	:	DATA

OTHERS

A.Vcc	:	ANALOG POWER SUPPLY
D.Vcc	:	DIGITAL POWER SUPPLY
TEST,$\overline{TEST}$	:	TEST

PCF8574TS-T (PHILIPS)

REMOTE 8-BIT I/O EXPANDER
—TOP VIEW—

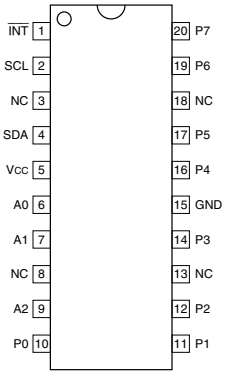

INPUTS

A0 - A2	:	ADDRESS
SCL	:	SERIAL CLOCK LINE

OUTPUT

$\overline{INT}$	:	INTERRUPT OUTPUT

INPUTS/OUTPUTS

P0 - P7	:	I/O PORT
SDA	:	SERIAL DATA LINE

OTHER

NC	:	NO CONNECTION

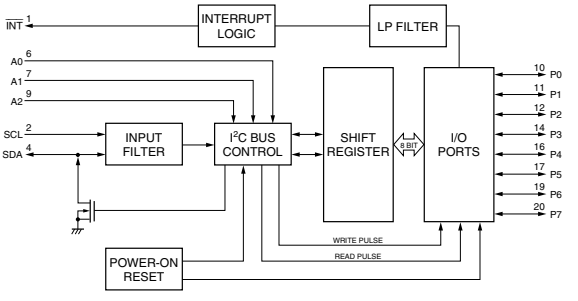

PCM3002E/2K (BURR-BROWN)

16-BIT SINGLE ENDED ANALOG INPUT/OUTPUT

—TOP VIEW—

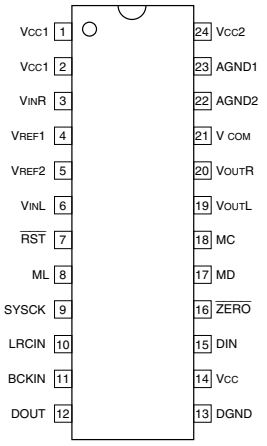

INPUTS

BCKIN : BIT CLOCK
DIN : AUDIO DATA
LRCIN : SAMPLING RATE CLOCK
MC : BIT CLOCK FOR MODE CONTROL
MD : SERIAL DATA FOR CONTROL
ML : STROBE PULSE FOR MODE CONTROL
RST : RESET
SYSCK : SYSTEM CLOCK
VINL : L-CH ANALOG
VINR : R-CH ANALOG

OUTPUTS

DOUT : AUDIO DATA
VOUTL : L-CH ANALOG
VOUTR : R-CH ANALOG
ZERO : ZERO FLAG

OTHERS

AGND1 : ADC ANALOG GROUND
AGND2 : DAC ANALOG GROUND
DGND : DIGITAL GROUND
VCC1 : ADC ANALOG POWER SUPPLY
VCC2 : DAC ANALOG POWER SUPPLY
VCOM : ADC/DAC COMMOM
VREF1 : ADC REFERENCE L-CH
VREF2 : ADC REFERENCE R-CH

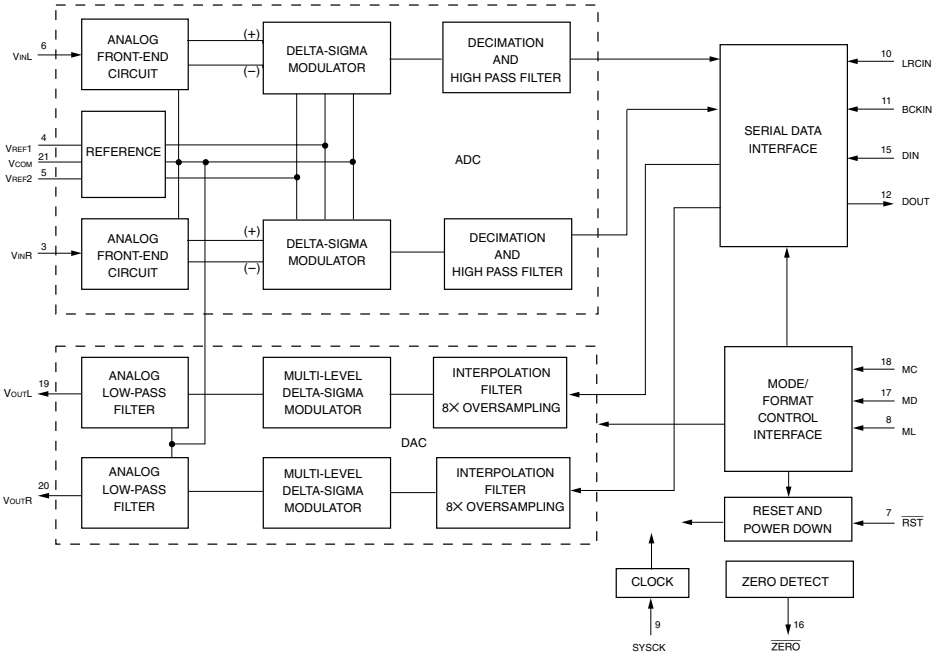

S2044B-10 (AMCC)

GLM COMPLIANT SERIAL INTERFACE CIRCUIT
—TOP VIEW—

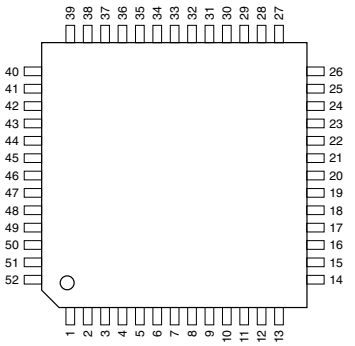

PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL
1	I	$\overline{OE1}$	14	—	GND2	27	—	A.Vcc	40	—	GND1
2	I	$\overline{OE0}$	15	I	RATESEL	28	I	D4	41	I	D12
3	—	Vcc1	16	I	REFCLK	29	I	D5	42	I	D13
4	O	TLY	17	—	Vcc3	30	I	D6	43	I	D14
5	O	TLX	18	I	REFSEL	31	I	D7	44	I	D15
6	—	Vcc2	19	I	DWS	32	—	A.Vcc	45	I	+SI
7	—	Vcc2	20	—	TEST	33	—	A.GND	46	I	−SI
8	O	TX	21	—	Vcc4	34	I	TX_SI	47	I	D16
9	O	TY	22	I	D0	35	I	D8	48	I	D17
10	—	Vcc1	23	I	D1	36	I	D9	49	I	D18
11	O	$\overline{TCLK}$	24	I	D2	37	I	D10	50	I	D19
12	O	TCLK	25	I	D3	38	I	D11	51	—	GND1
13	—	GND1	26	—	A.GND	39	—	Vcc4	52	—	GND1

INPUTS
D0 - D19 : ACCEPT PARALLEL DATA
DWS : PARALLEL DATA BUS WIDTH SELECT
$\overline{OE0}$: OUTPUT ENABLE CONTROL FOR TX/TY OUTPUTS
$\overline{OE1}$: OUTPUT ENABLE CONTROL FOR TLX/TLY OUTPUTS
RATESEL : SELECT THE OPERATING SPEED OF THE TRANSMITTER
REFCLK : REFERENCE CLOCK
REFSEL : SELECT THE REFERENCE CLOCK FREQUENCY
−SI,+SI : SERIAL DATA STREAM
TX_SI : MULTILEVEL SIGNAL

OUTPUTS
TCLK,$\overline{TCLK}$: DIFFERENTIAL TTL WORD RATE CLOCK TRUE AND COMPLEMENT
TLX,TLY : DIFFERENTIAL PECL (ENABLED BY $\overline{OE1}$)
TX : DIFFERENTIAL PECL,POSITIVE (ENABLED BY $\overline{OE0}$)
TY : DIFFERENTIAL PECL,NEGATIVE (ENABLED BY $\overline{OE0}$)

OTHERS
A.GND : ANALOG GROUND
A.Vcc : ANALOG POWER SUPPLY
GND1 : CORE GROUND
GND2 : TTL GROUND
TEST : FACTORY TESTING
Vcc1 - Vcc2 : PECL I/O POWER SUPPLY
Vcc3 : TTL POWER SUPPLY
Vcc4 : CORE + 3.3V

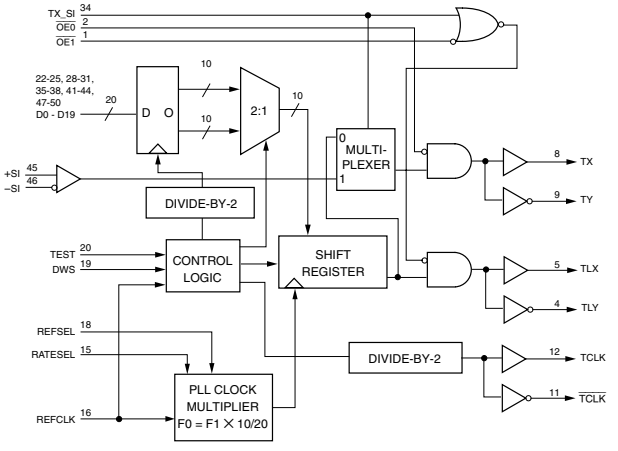

S2045B-10

GLM COMPLIANT SERIAL INTERFACE CIRCUIT
—TOP VIEW—

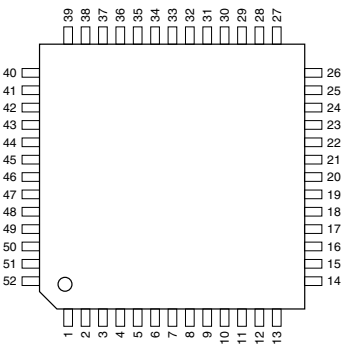

PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL
1	—	GND1	14	O	D0	27	—	Vcc1	40	O	D16
2	I	REFCLK	15	O	D1	28	O	D8	41	—	GND2
3	I	SYNCEN	16	—	GND2	29	O	D9	42	O	D17
4	I	DWS	17	O	D2	30	I	REFSEL	43	O	D18
5	—	A.GND	18	O	D3	31	O	D10	44	—	Vcc2
6	—	A.GND	19	—	Vcc2	32	O	D11	45	O	D19
7	—	A.Vcc	20	I	RATESEL	33	—	GND2	46	—	GND2
8	I	$\overline{LPE}$	21	O	D4	34	O	D12	47	—	GND1
9	I	RX	22	O	D5	35	O	D13	48	O	$\overline{RCLK}$
10	I	RY	23	—	Vcc2	36	—	Vcc2	49	O	RCLK
11	I	RLX	24	O	D6	37	O	D14	50	I	LOCK_REF
12	I	RLY	25	O	D7	38	O	D15	51	O	SYNC
13	—	Vcc1	26	—	GND1	39	—	Vcc1	52	O	$\overline{LOCKDET}$

INPUTS
DWS : PARALLEL DATA BUS WIDTH SELECT
$\overline{LOCK_REF}$: FORCE PLL TO LOCK TO THE REFERENCE CLOCK
$\overline{LPE}$: RX/RY SELECT
RATESEL : SELECT OPERATING SPEED OF RECEIVER
REFCLK : A FREE-RUNNING CRYSTAL-CONTROLLED REFERENCE CLOCK
REFSEL : SELECT THE REFERENCE CLOCK
RLX : SERIAL LOOPBACK DATA, POSITIVE
RLY : SERIAL LOOPBACK DATA, NEGATIVE
RX : RECEIVED SERIAL DATA,POSITIVE
RY : RECEIVED SERIAL DATA,NEGATIVE
SYNCEN : SYNC ENABLE

OUTPUTS
D0 - D19 : PARALLEL DATA
$\overline{LOCKDET}$: DETECT PLL LOCK (WHEN LOW) /PLL IS LOCKED TO THE LOCAL REFERENCE CLOCK (WHEN HIGH)
RCLK,$\overline{RCLK}$: WORD CLOCK
SYNC : SYNC

OTHERS
A.GND : ANALOG GROUND
A.Vcc : ANALOG POWER SUPPLY
GND1 : CORE GROUND
GND2 : TTL GROUND
Vcc1 : CORE POWER SUPPLY
Vcc2 : TTL POWER SUPPLY

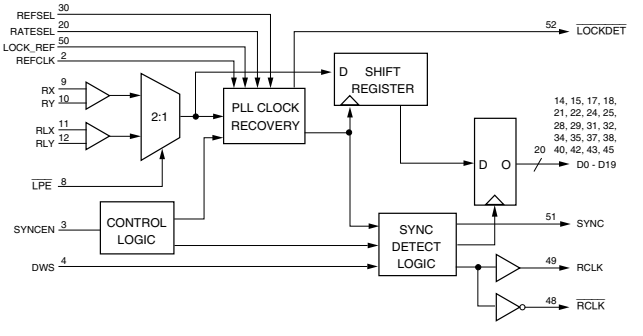

Section 3
Block Diagrams

Index

Board Name	Function	Page
Overall (CCU-900/900P)	–	3-2
Overall (BKP-9330)	–	3-16
AT-122 (CCU-900/900P)	Sytem Control, Audio Process	3-12
DIF-38 (BKP-9330)	Super Motion Output	3-18
DPR-69 (CCU-900/900P)	SG, Video Process	3-4
IF-730 (CCU-900/900P)	Interface	3-11
SDI-31 (CCU-900/900P)	Digital Interface	3-10
VPR-57 (BKP-9330)	Super Motion Video Process	3-19

3-1

CCU-900 (UC) : S/N 10001 and Higher
CCU-900 (J) : S/N 30001 and Higher
CCU-900P (CE) : S/N 40001 and Higher

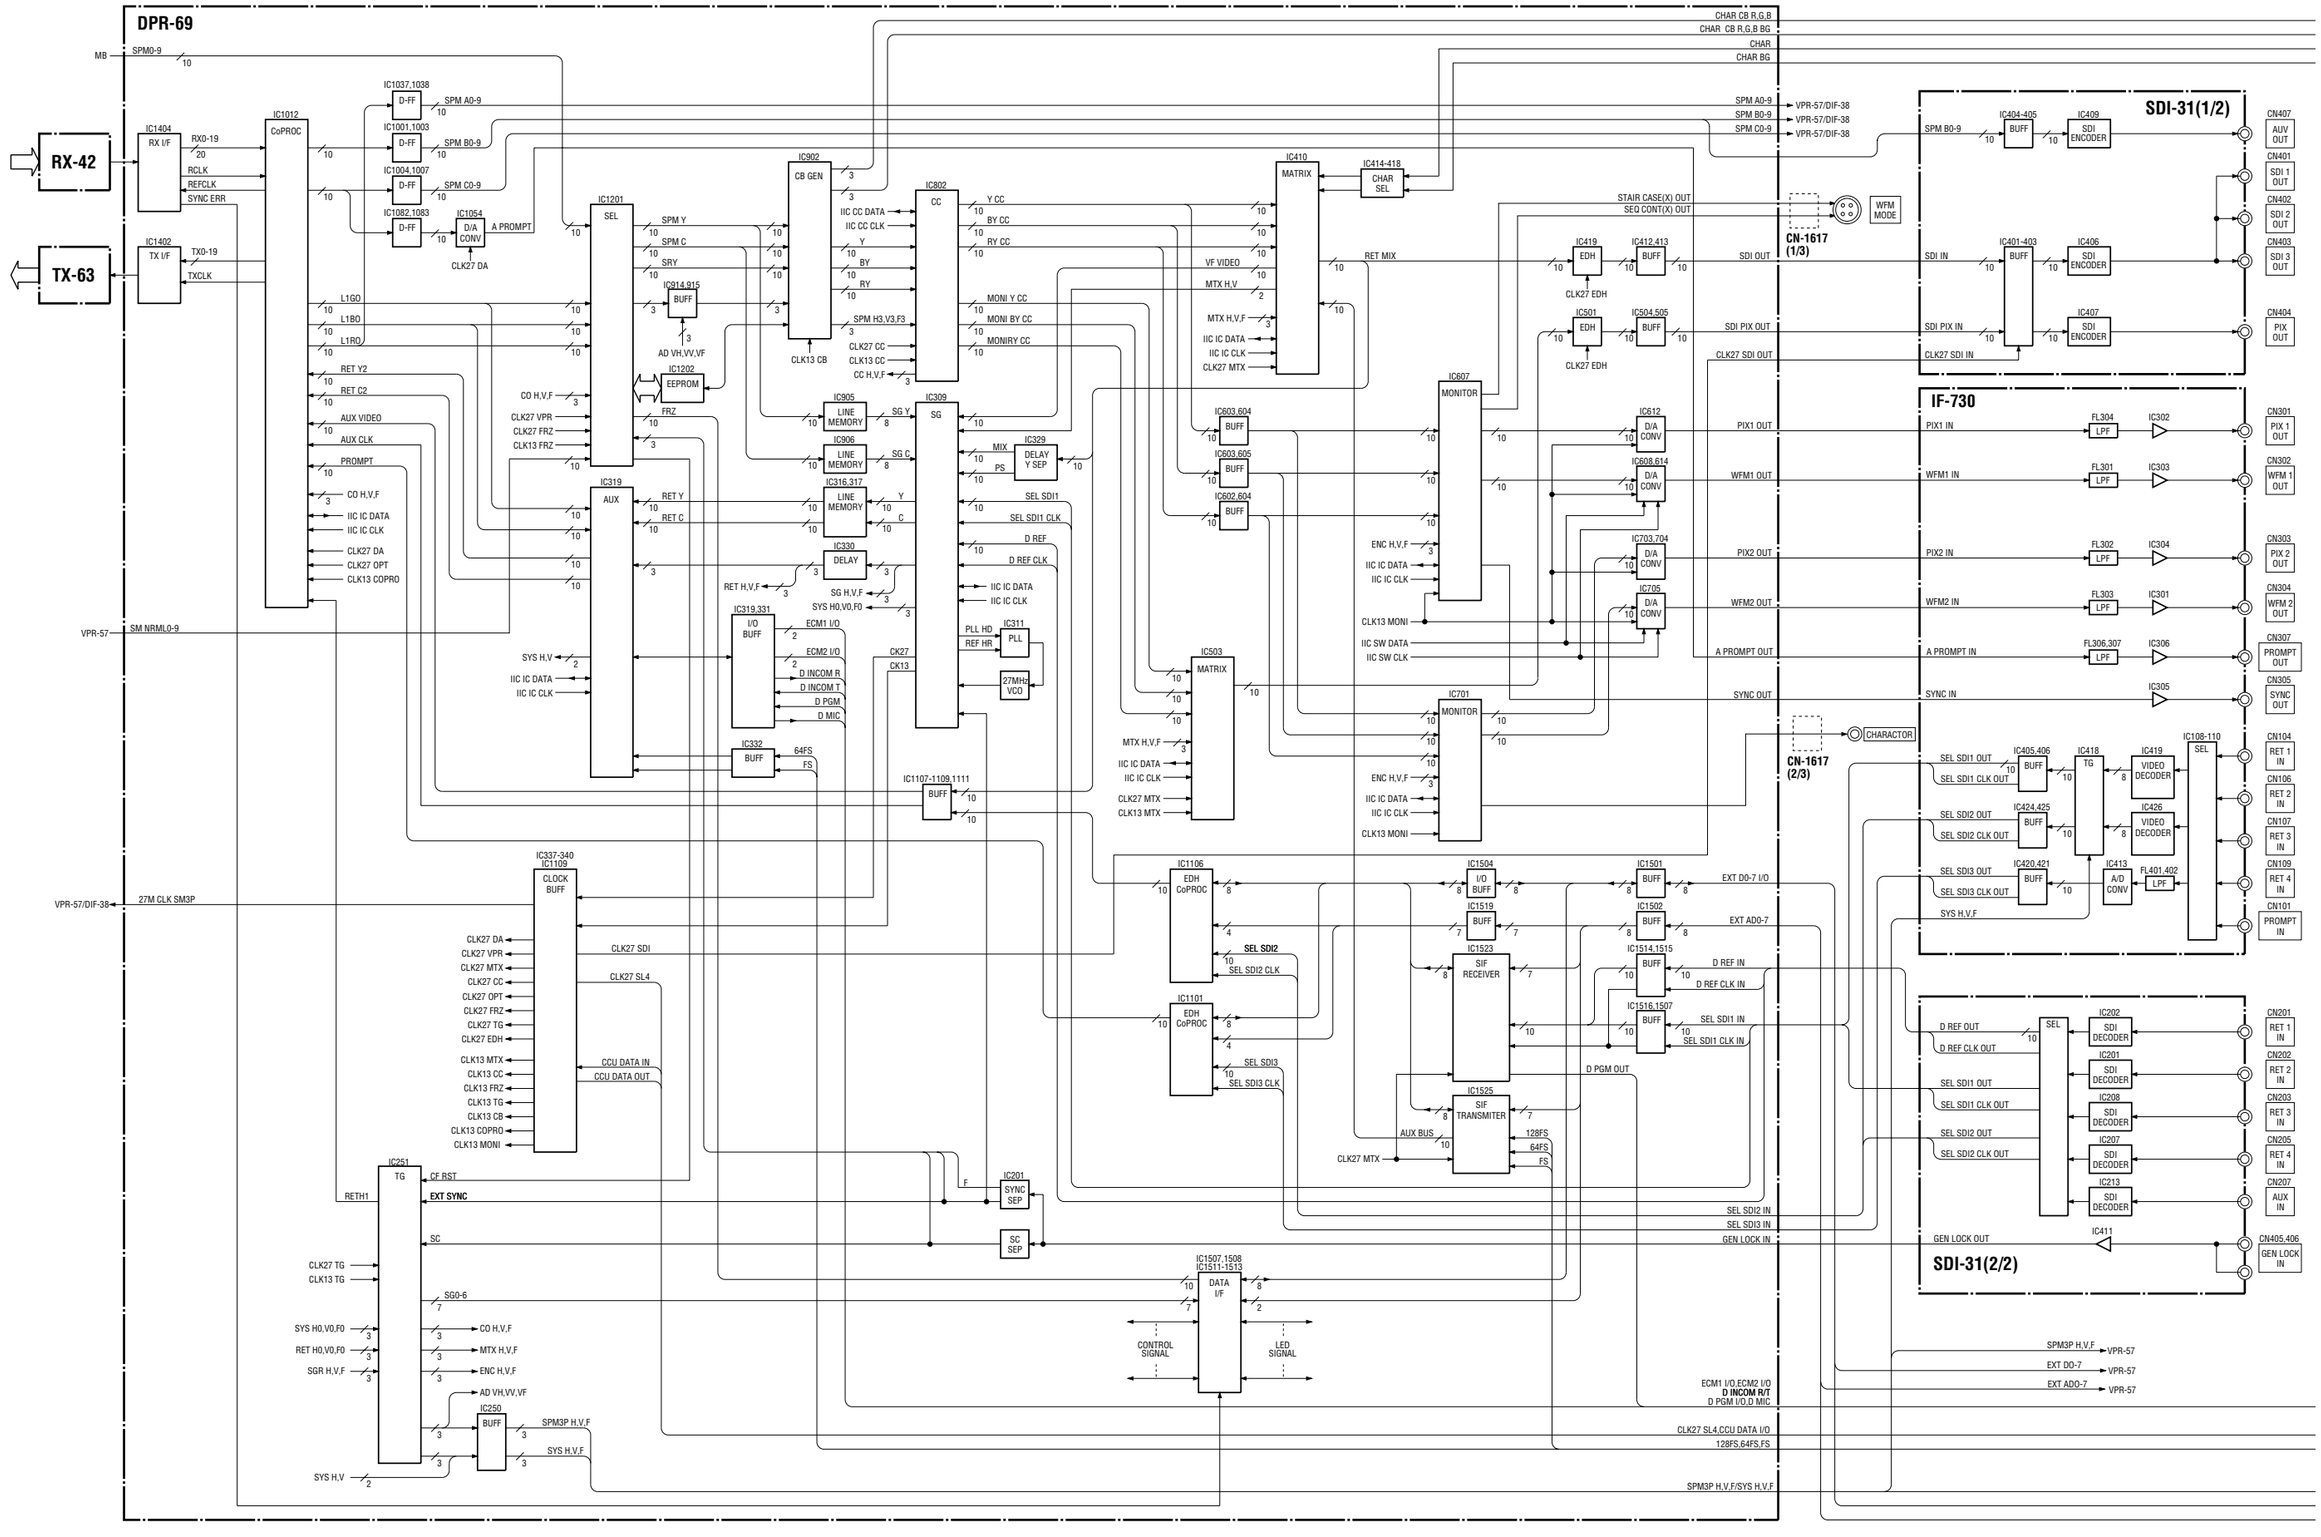

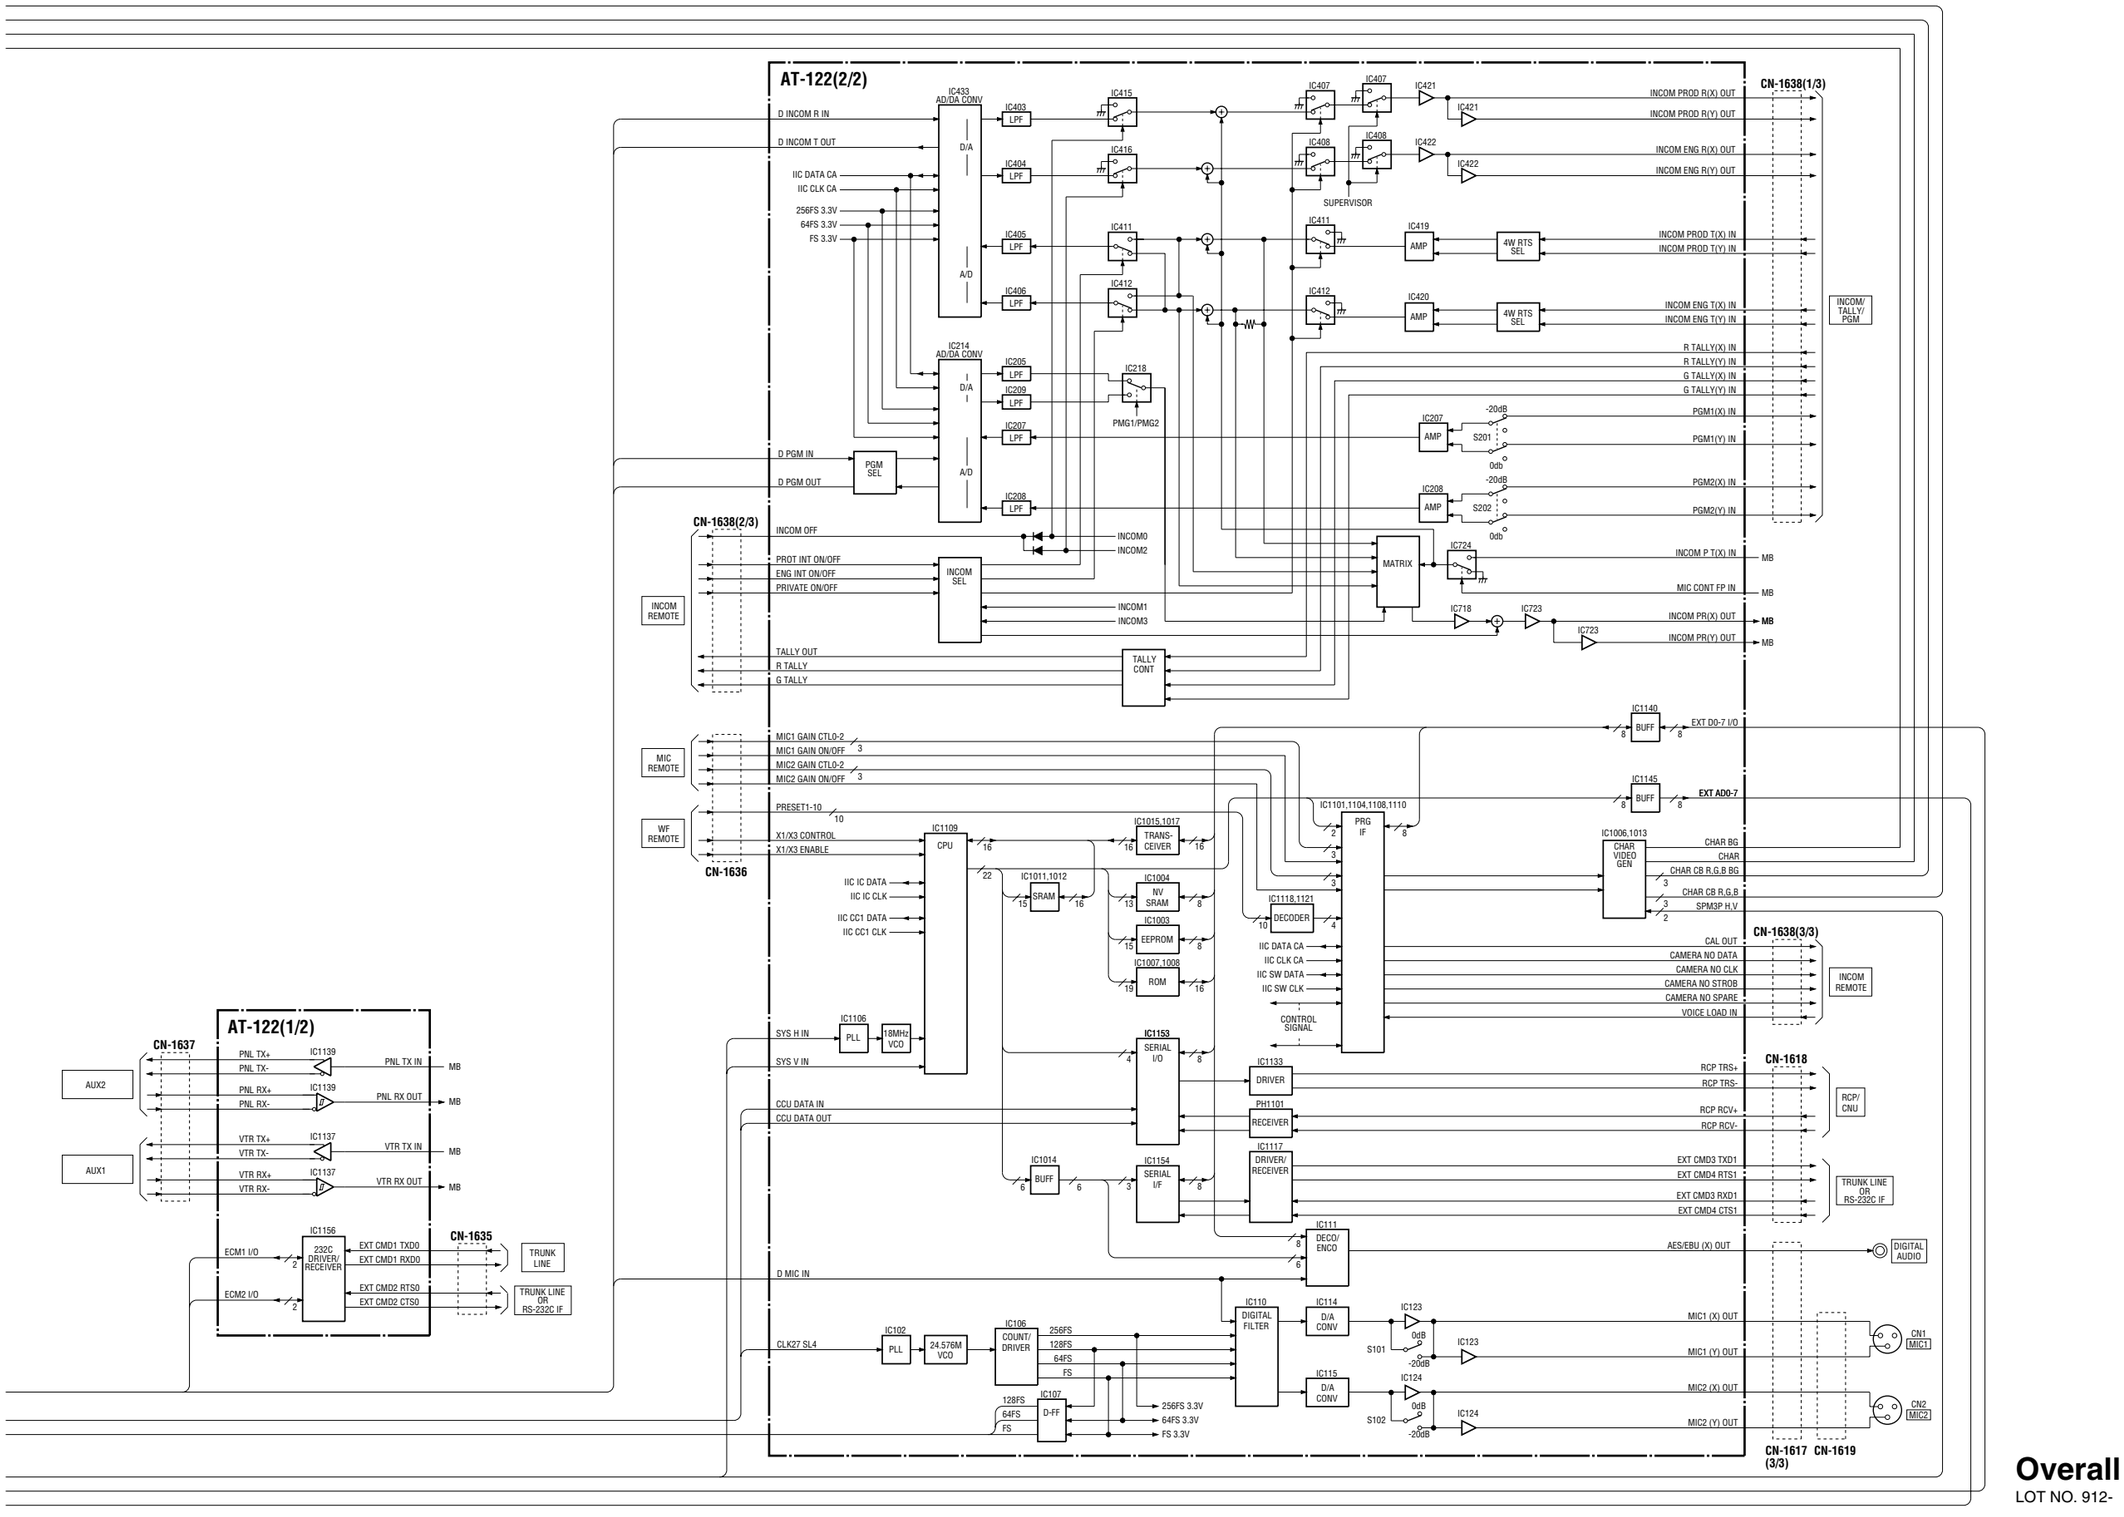

Overall
LOT NO. 912-

DPR-69 (1/6)

CCU-900 (UC) : S/N 10001 and Higher
CCU-900 (J) : S/N 30001 and Higher
CCU-900P (CE) : S/N 40001 and Higher

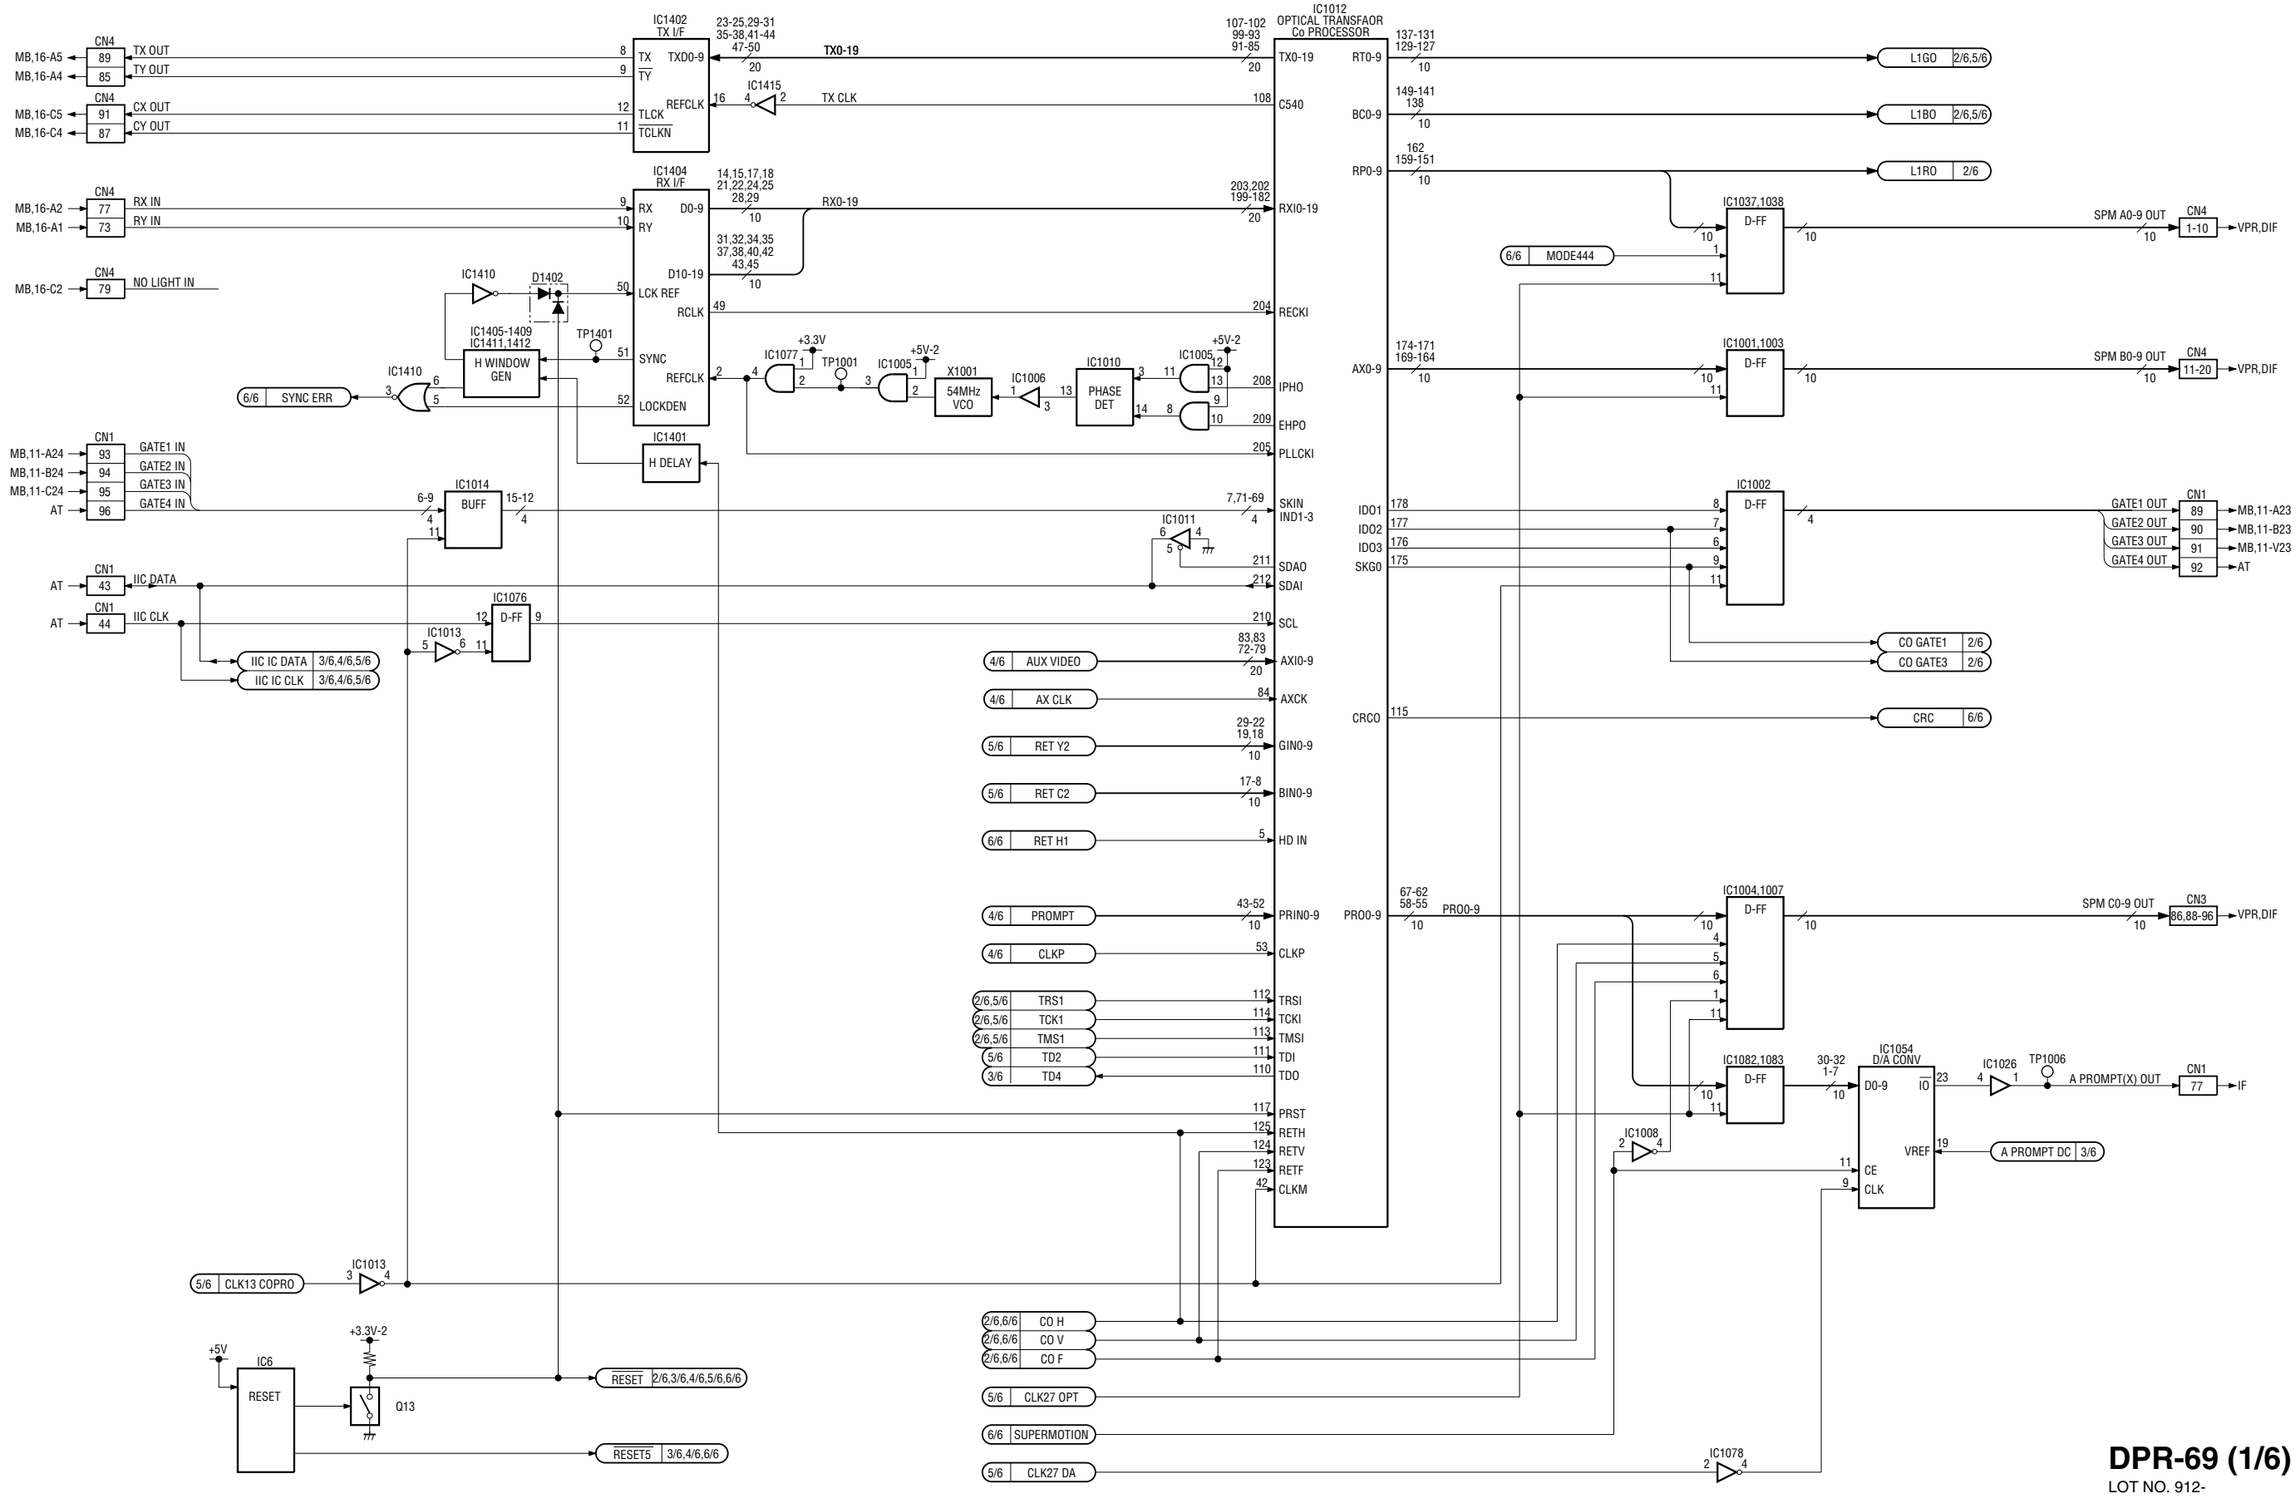

DPR-69 (1/6)
LOT NO. 912-

3-4

DPR-69 (2/6)

CCU-900 (UC) : S/N 10001 and Higher
CCU-900 (J) : S/N 30001 and Higher
CCU-900P (CE) : S/N 40001 and Higher

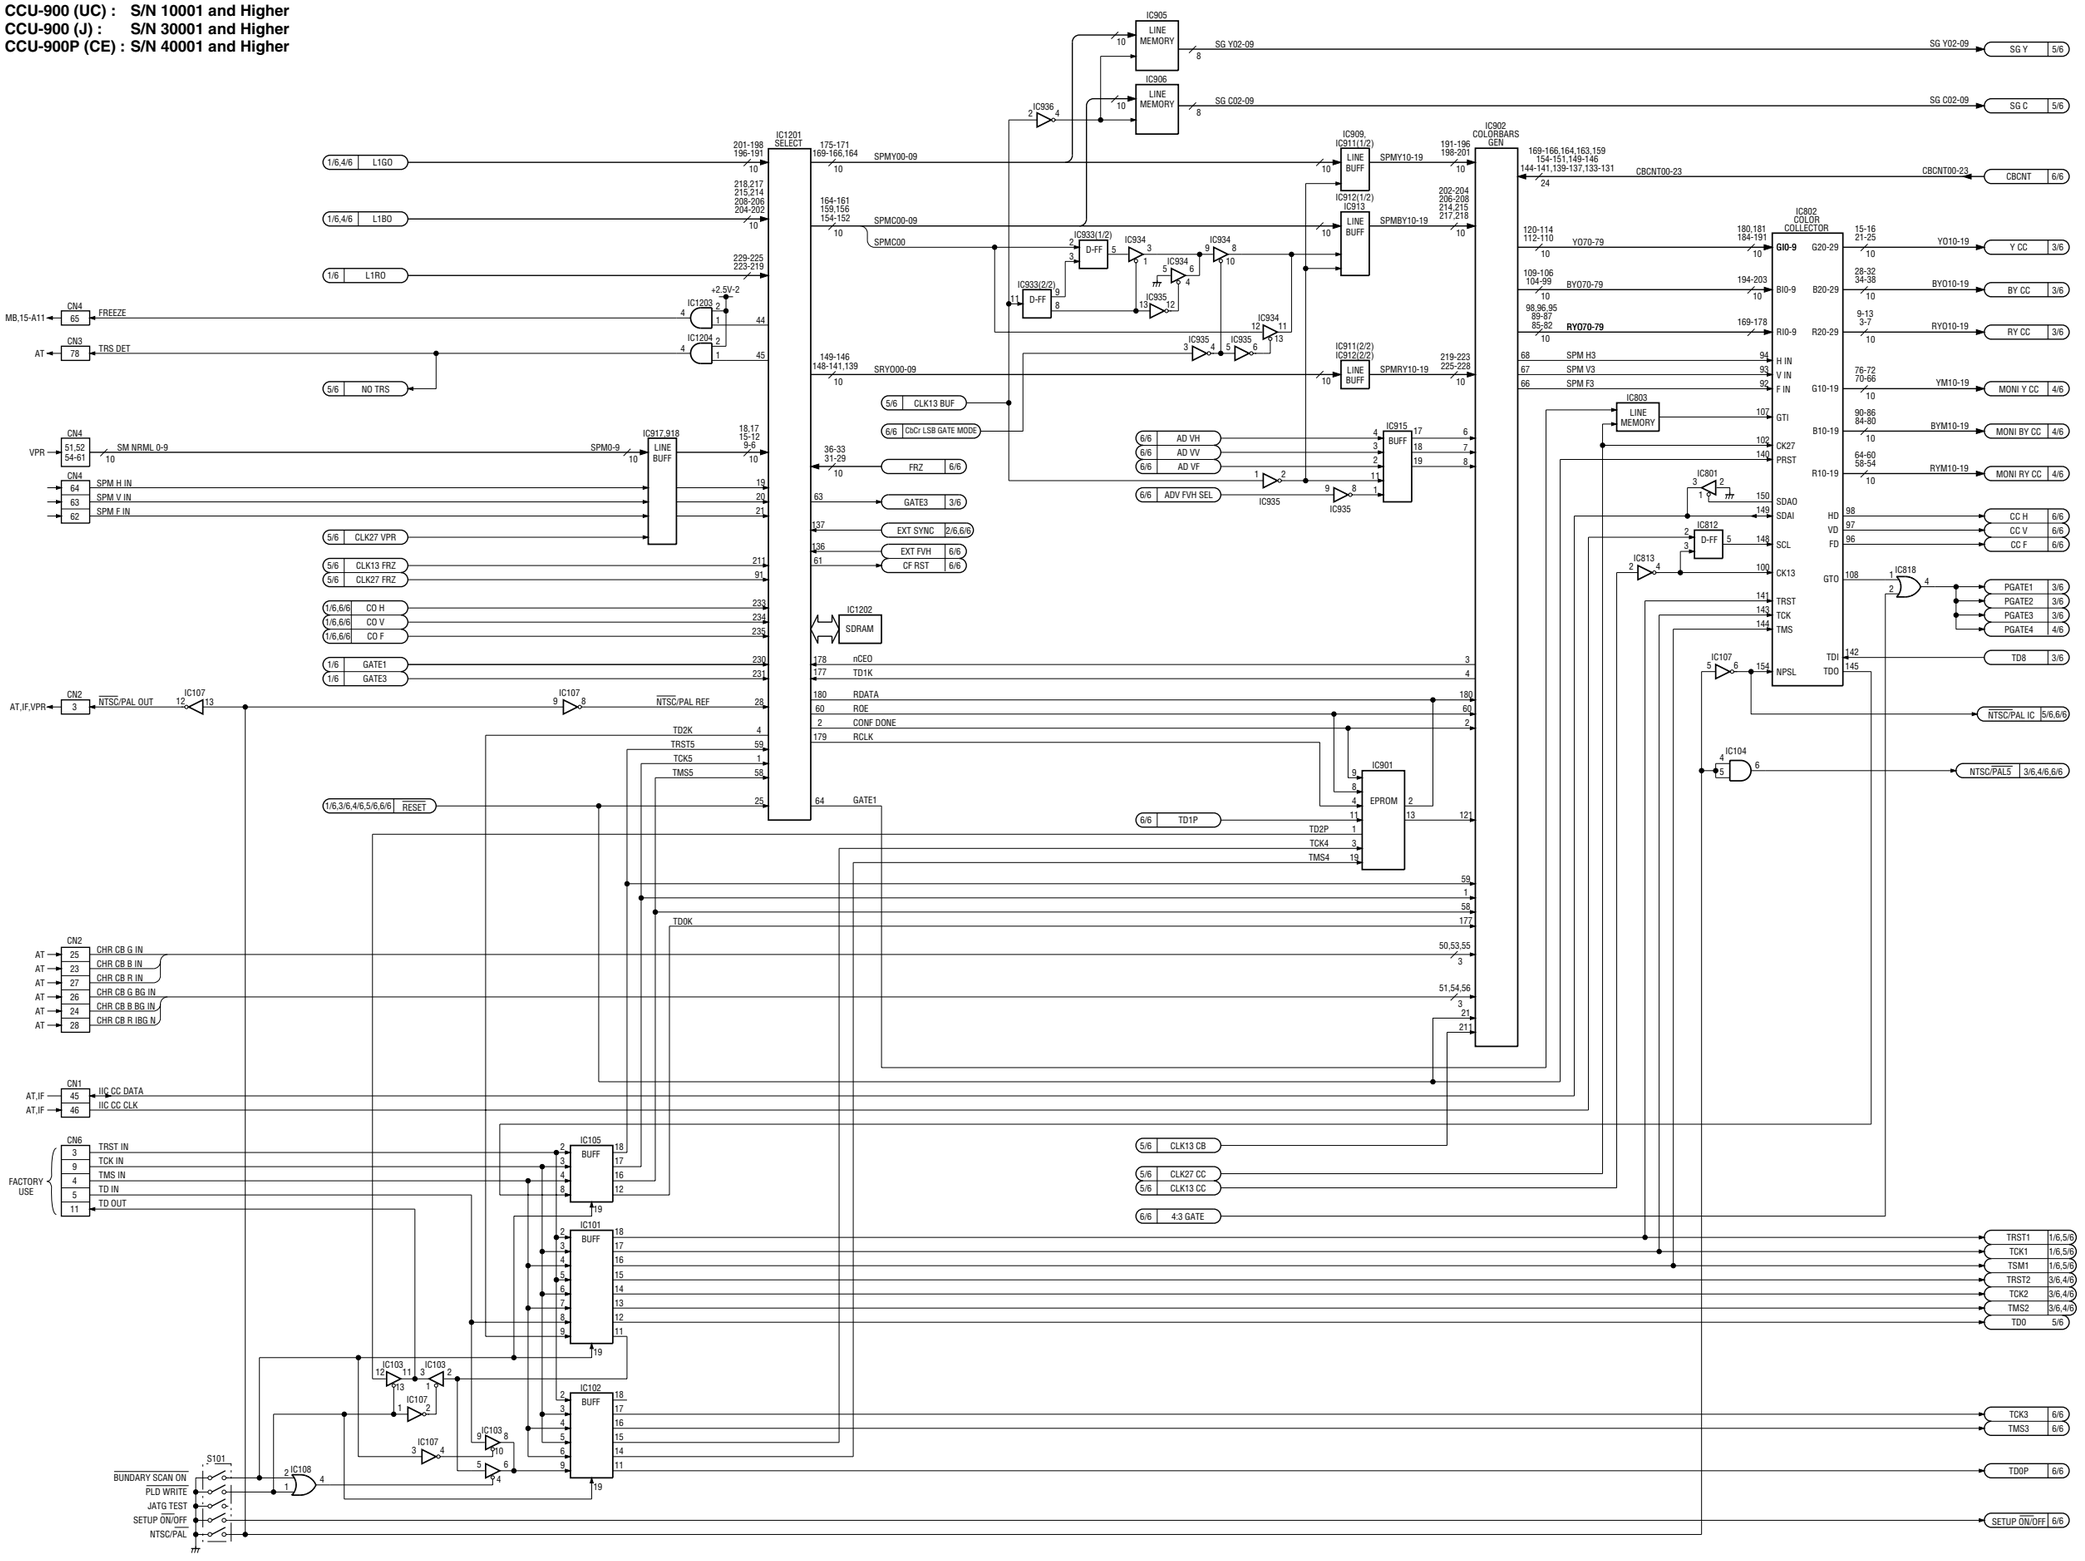

DPR-69 (2/6)
LOT NO. 912-

DPR-69 (3/6)

CCU-900 (UC) : S/N 10001 and Higher
CCU-900 (J) : S/N 30001 and Higher
CCU-900P (CE) : S/N 40001 and Higher

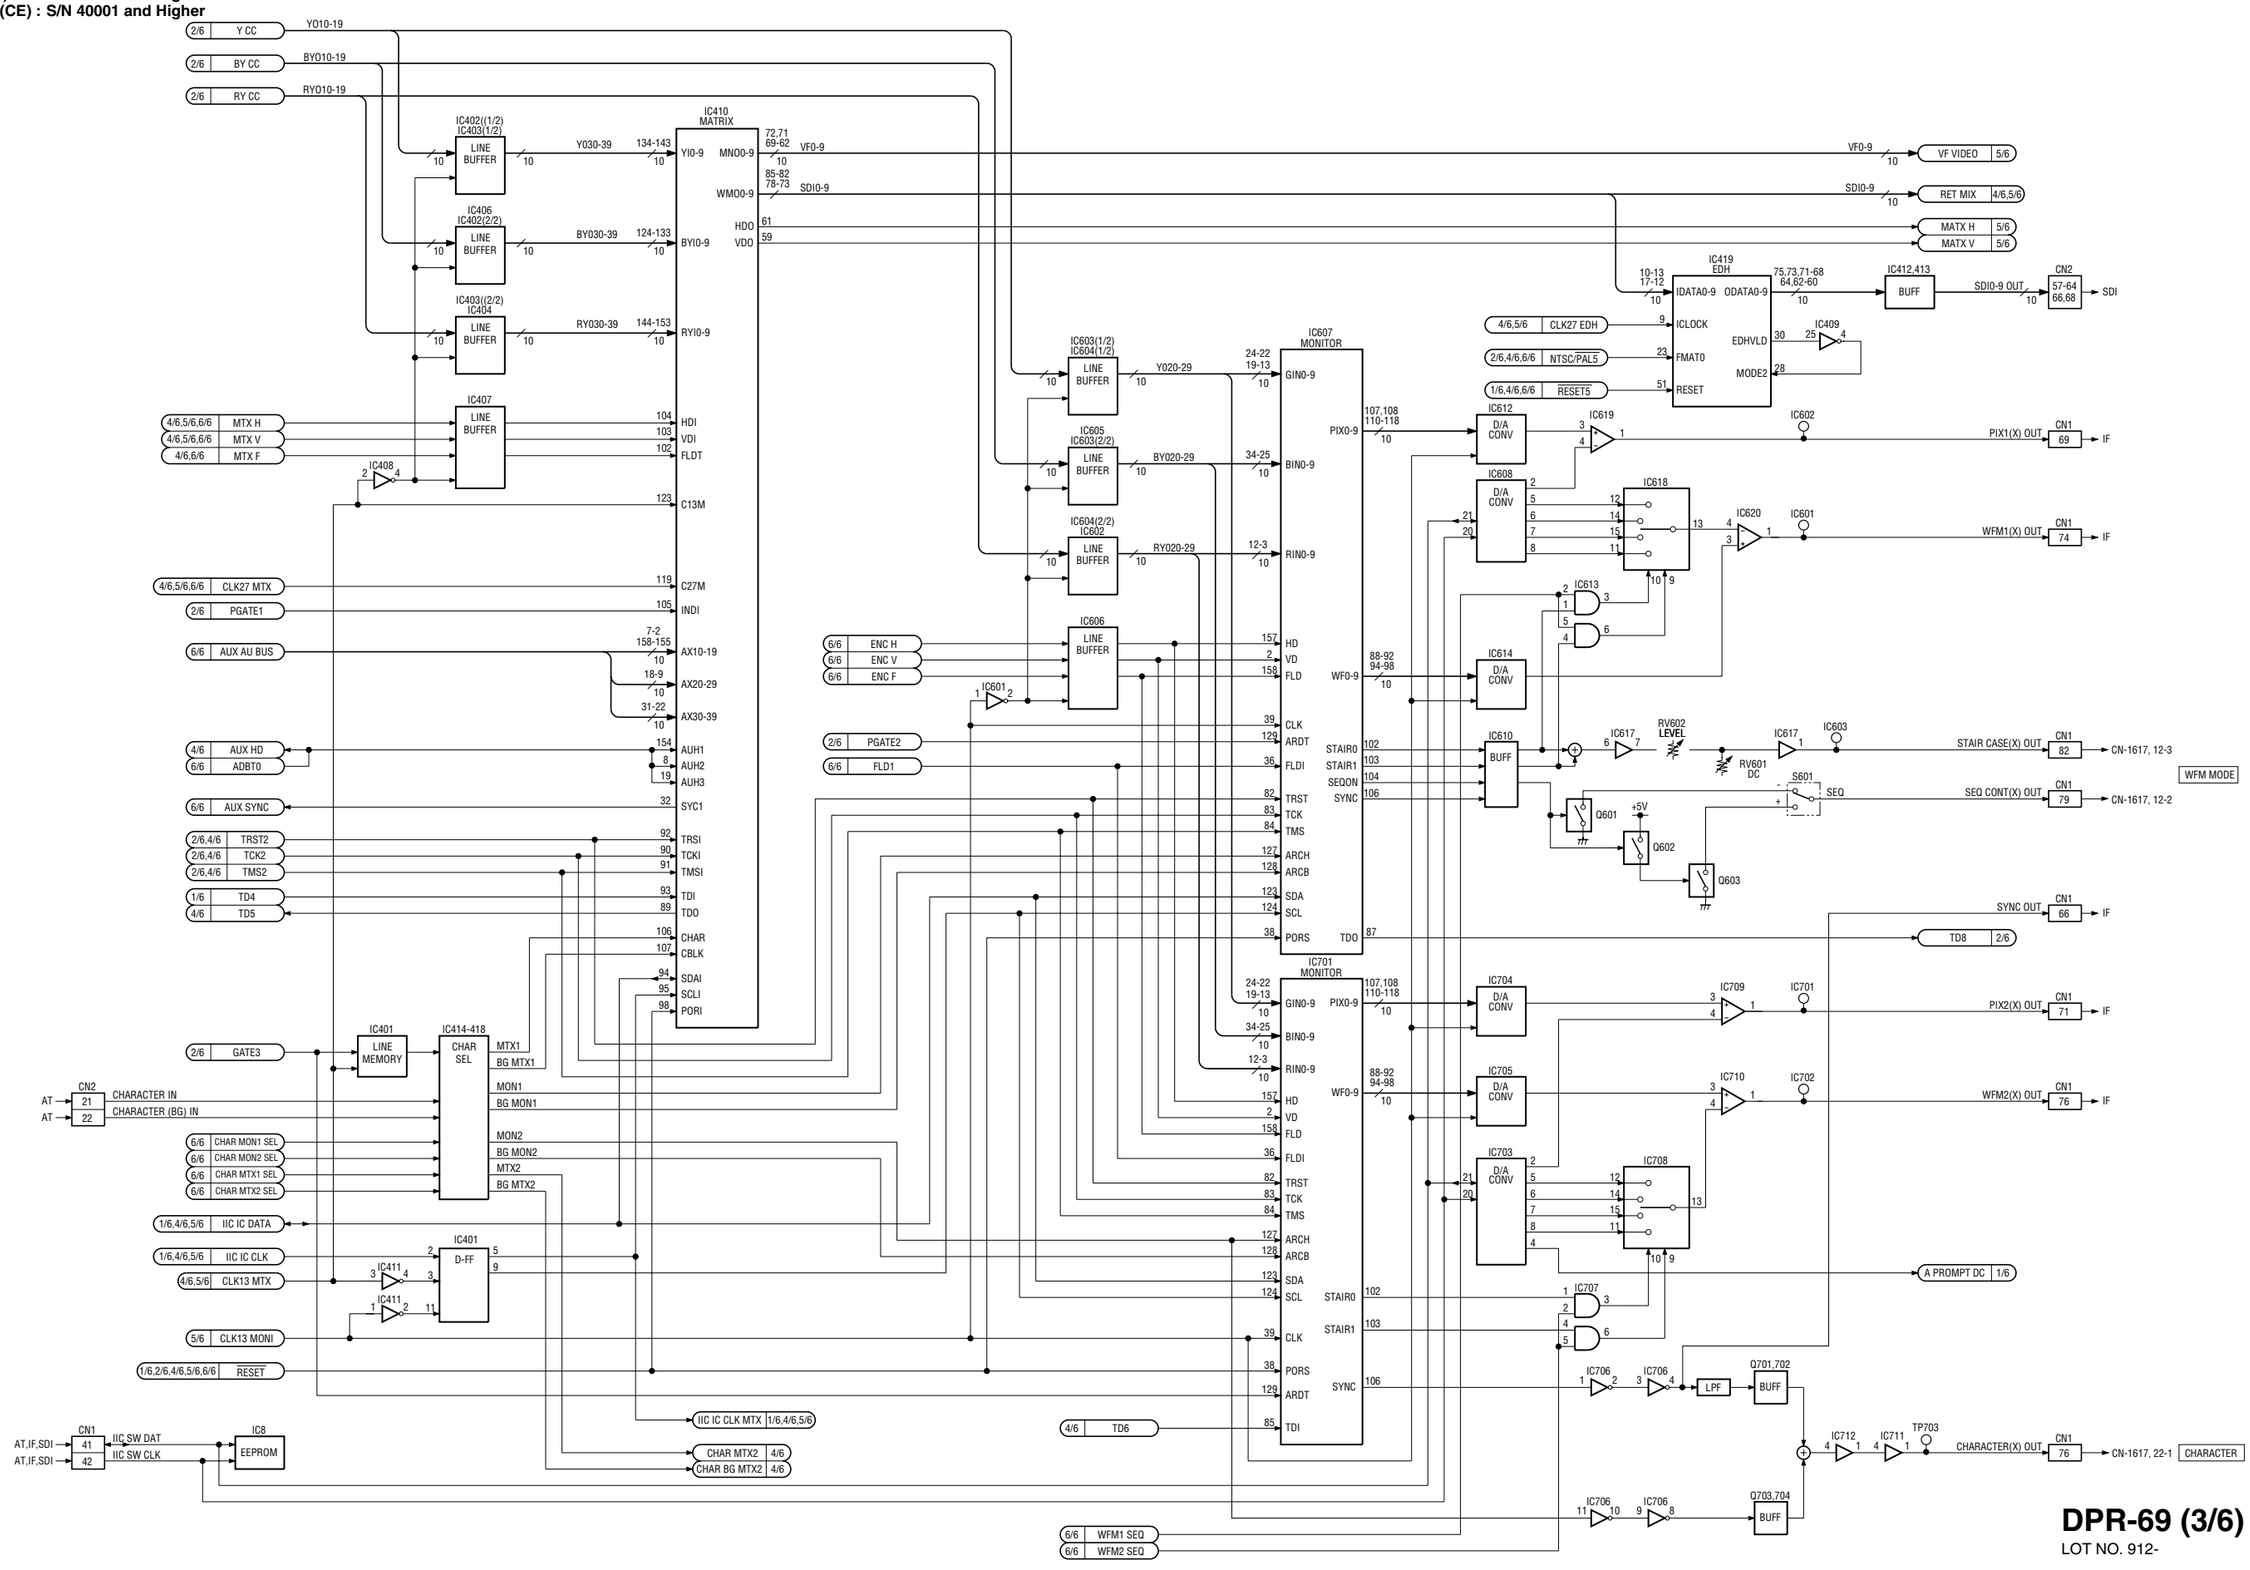

3-6

DPR-69 (3/6)
LOT NO. 912-

 DPR-69 (4/6)

CCU-900 (UC) : S/N 10001 and Higher
CCU-900 (J) : S/N 30001 and Higher
CCU-900P (CE) : S/N 40001 and Higher

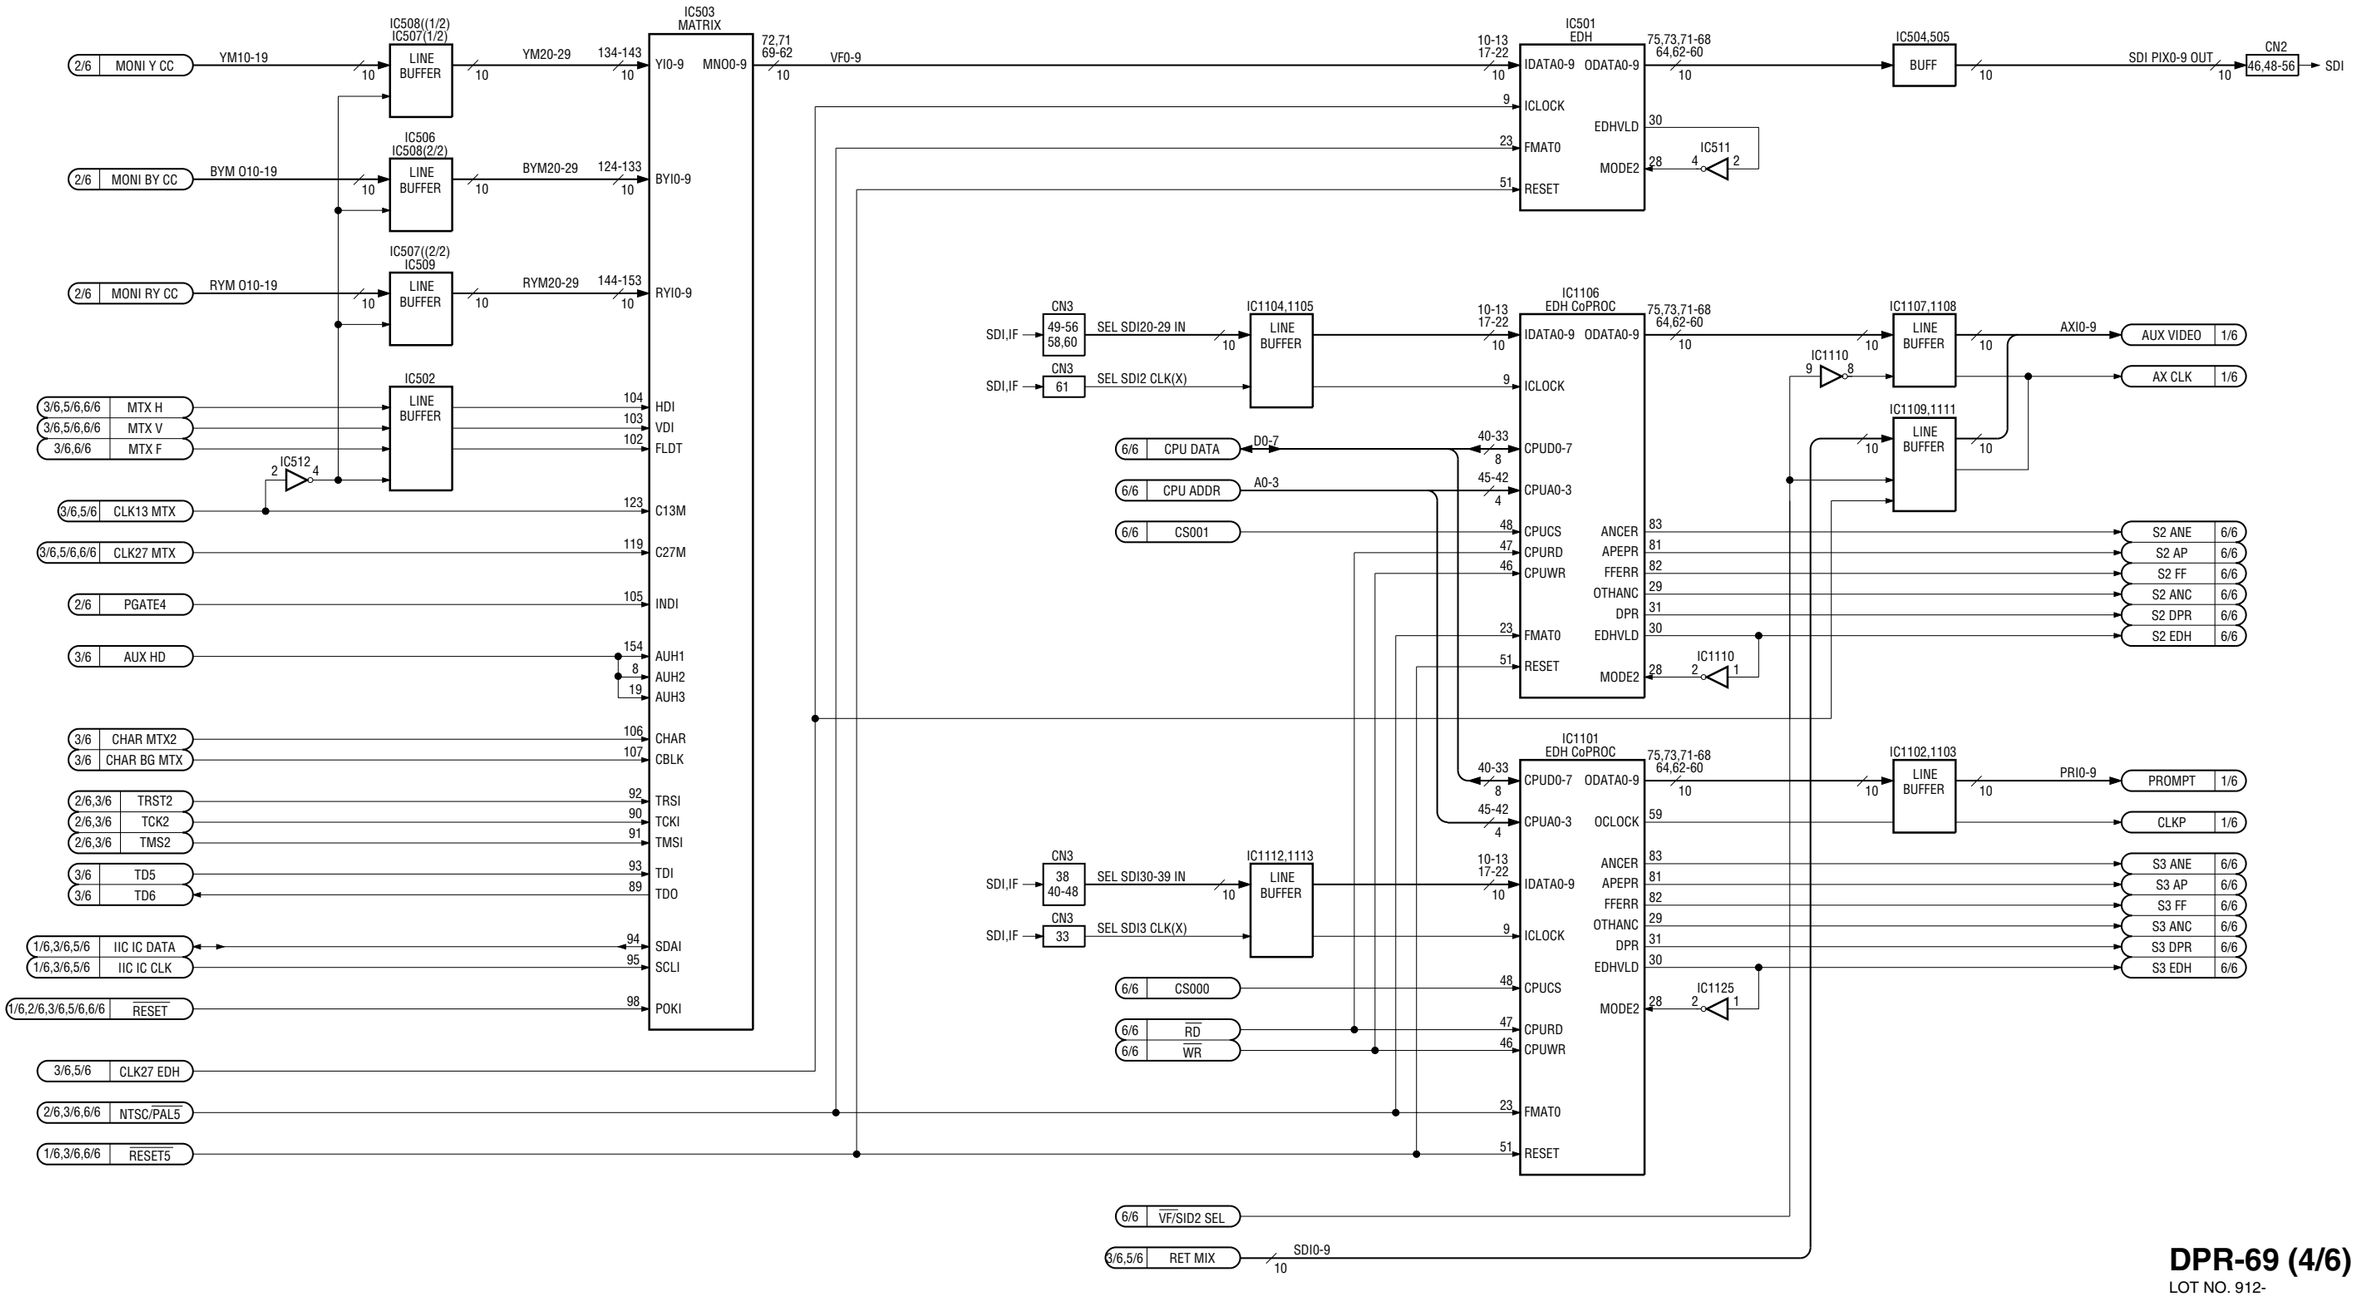

DPR-69 (4/6)
LOT NO. 912-

 3-7

CCU-900 (UC) : S/N 10001 and Higher
CCU-900 (J) : S/N 30001 and Higher
CCU-900P (CE) : S/N 40001 and Higher

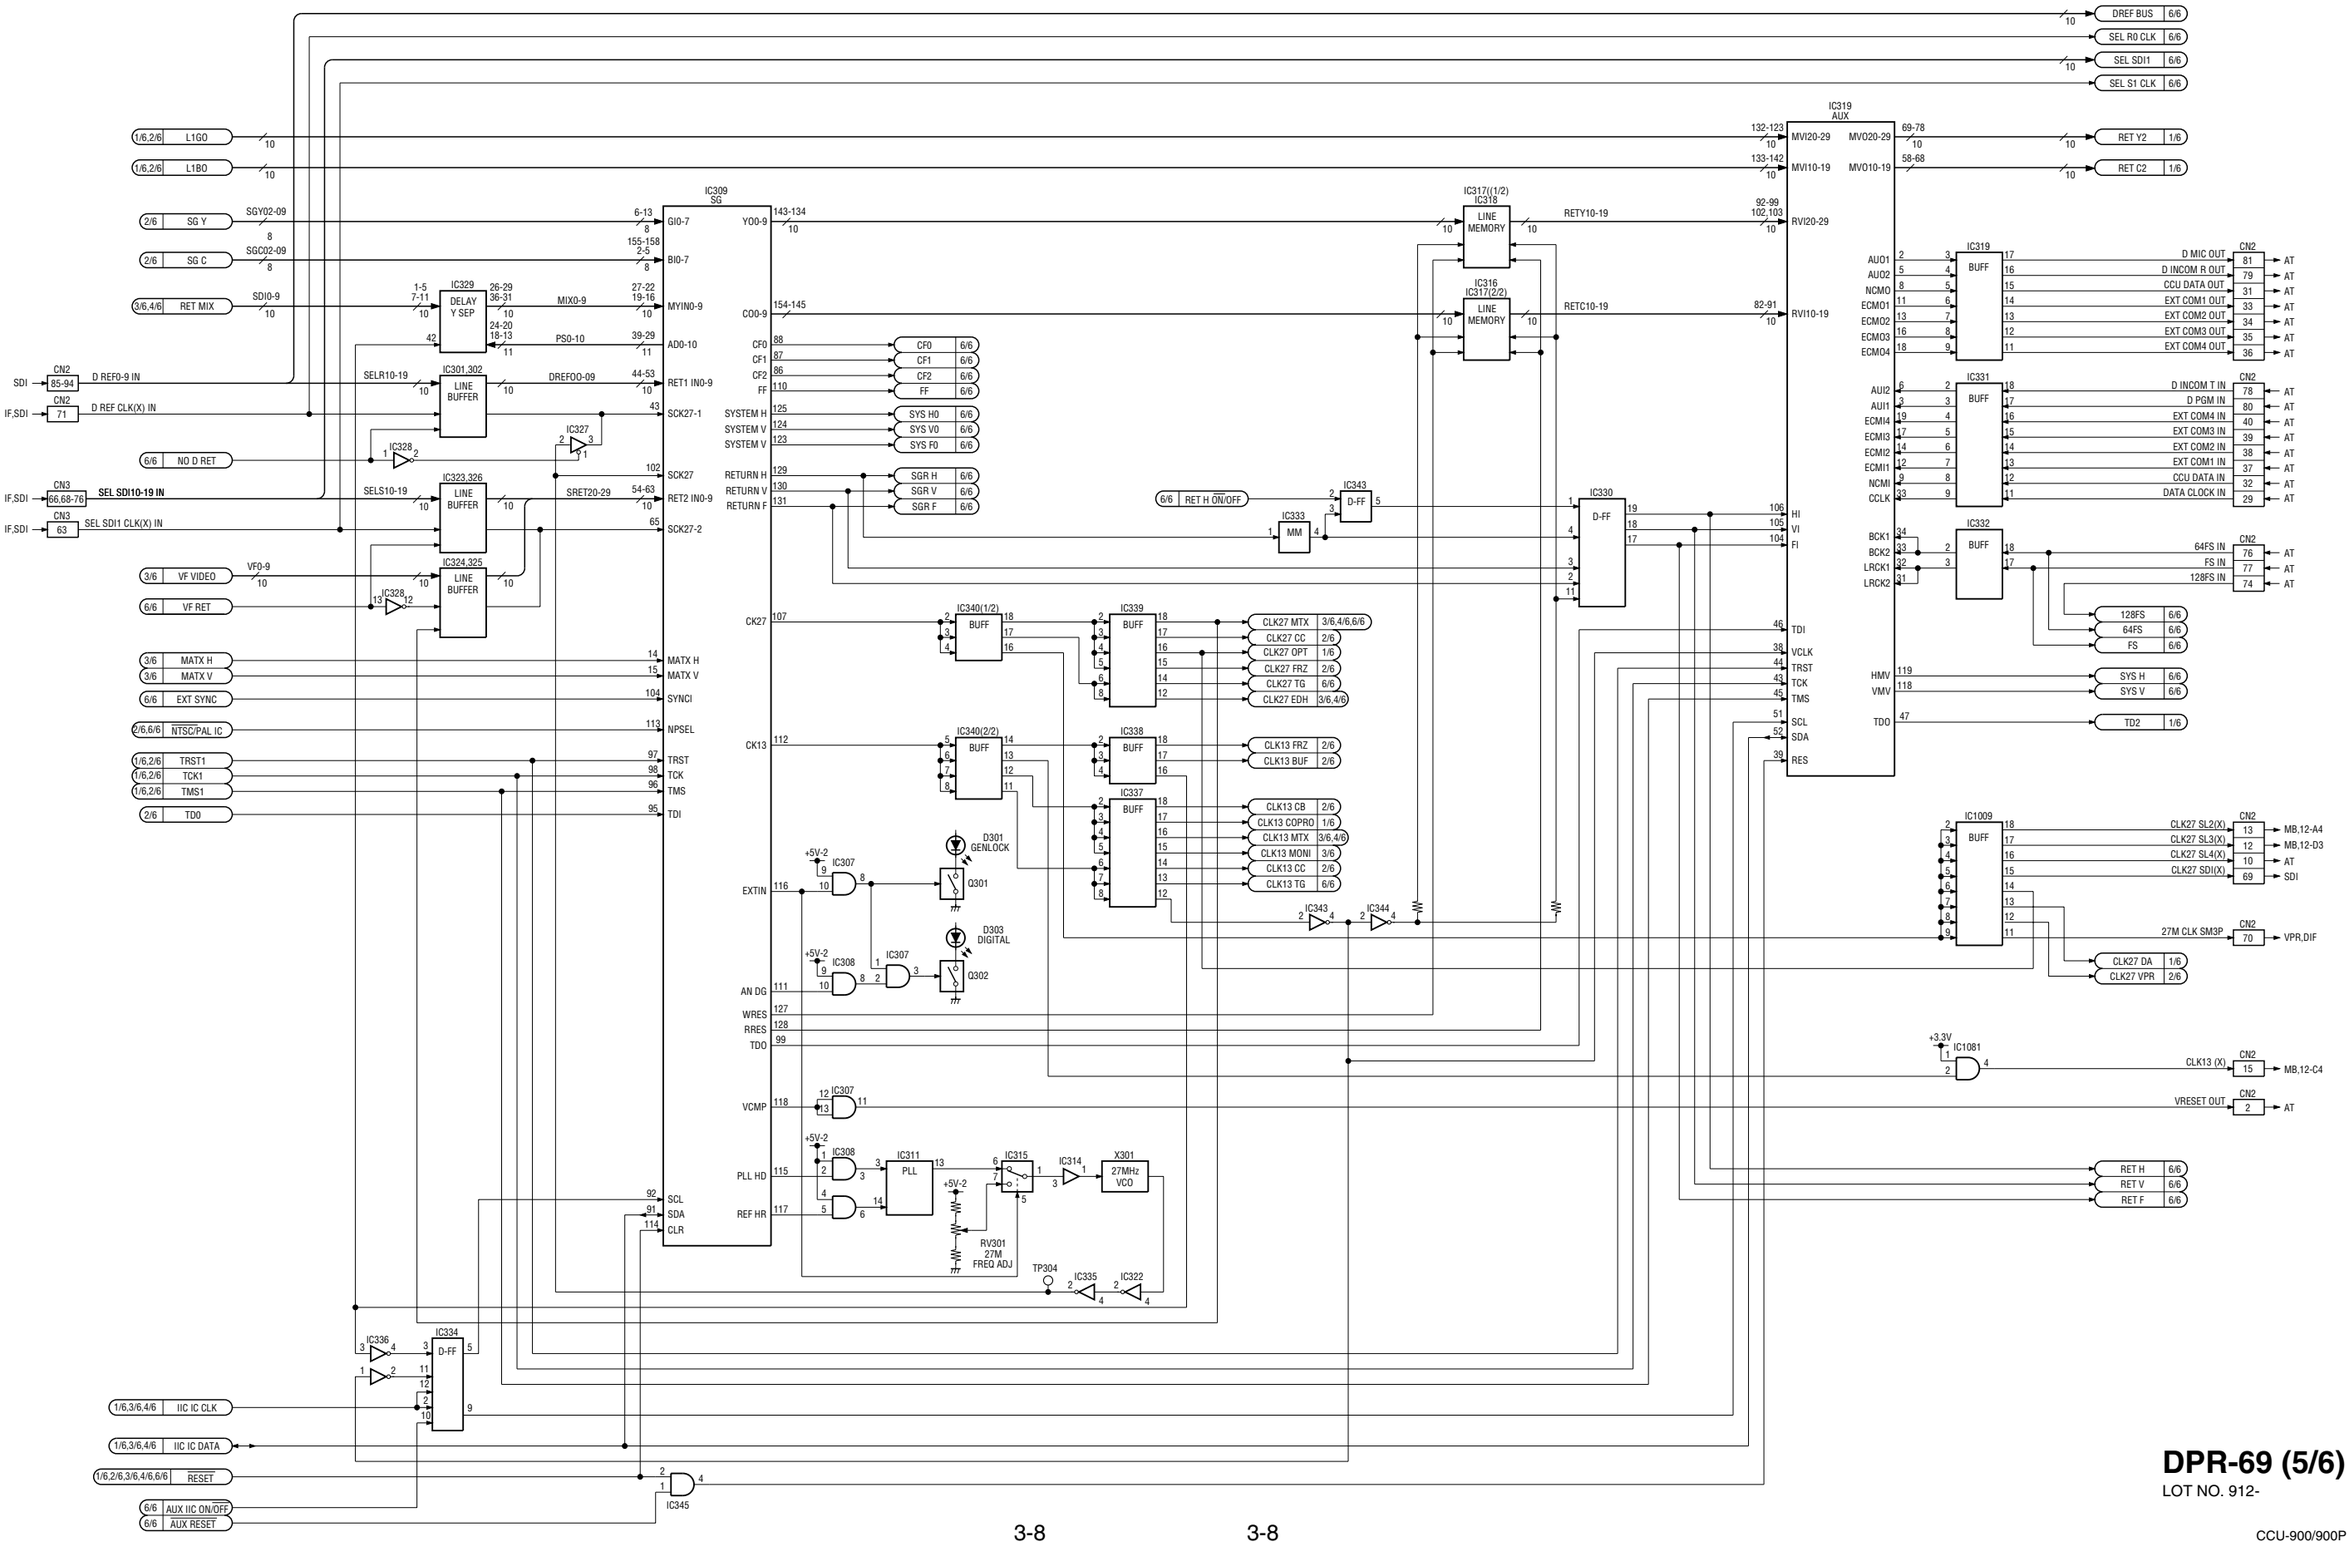

DPR-69 (5/6)
LOT NO. 912-

DPR-69 (6/6)

CCU-900 (UC) : S/N 10001 and Higher
CCU-900 (J) : S/N 30001 and Higher
CCU-900P (CE) : S/N 40001 and Higher

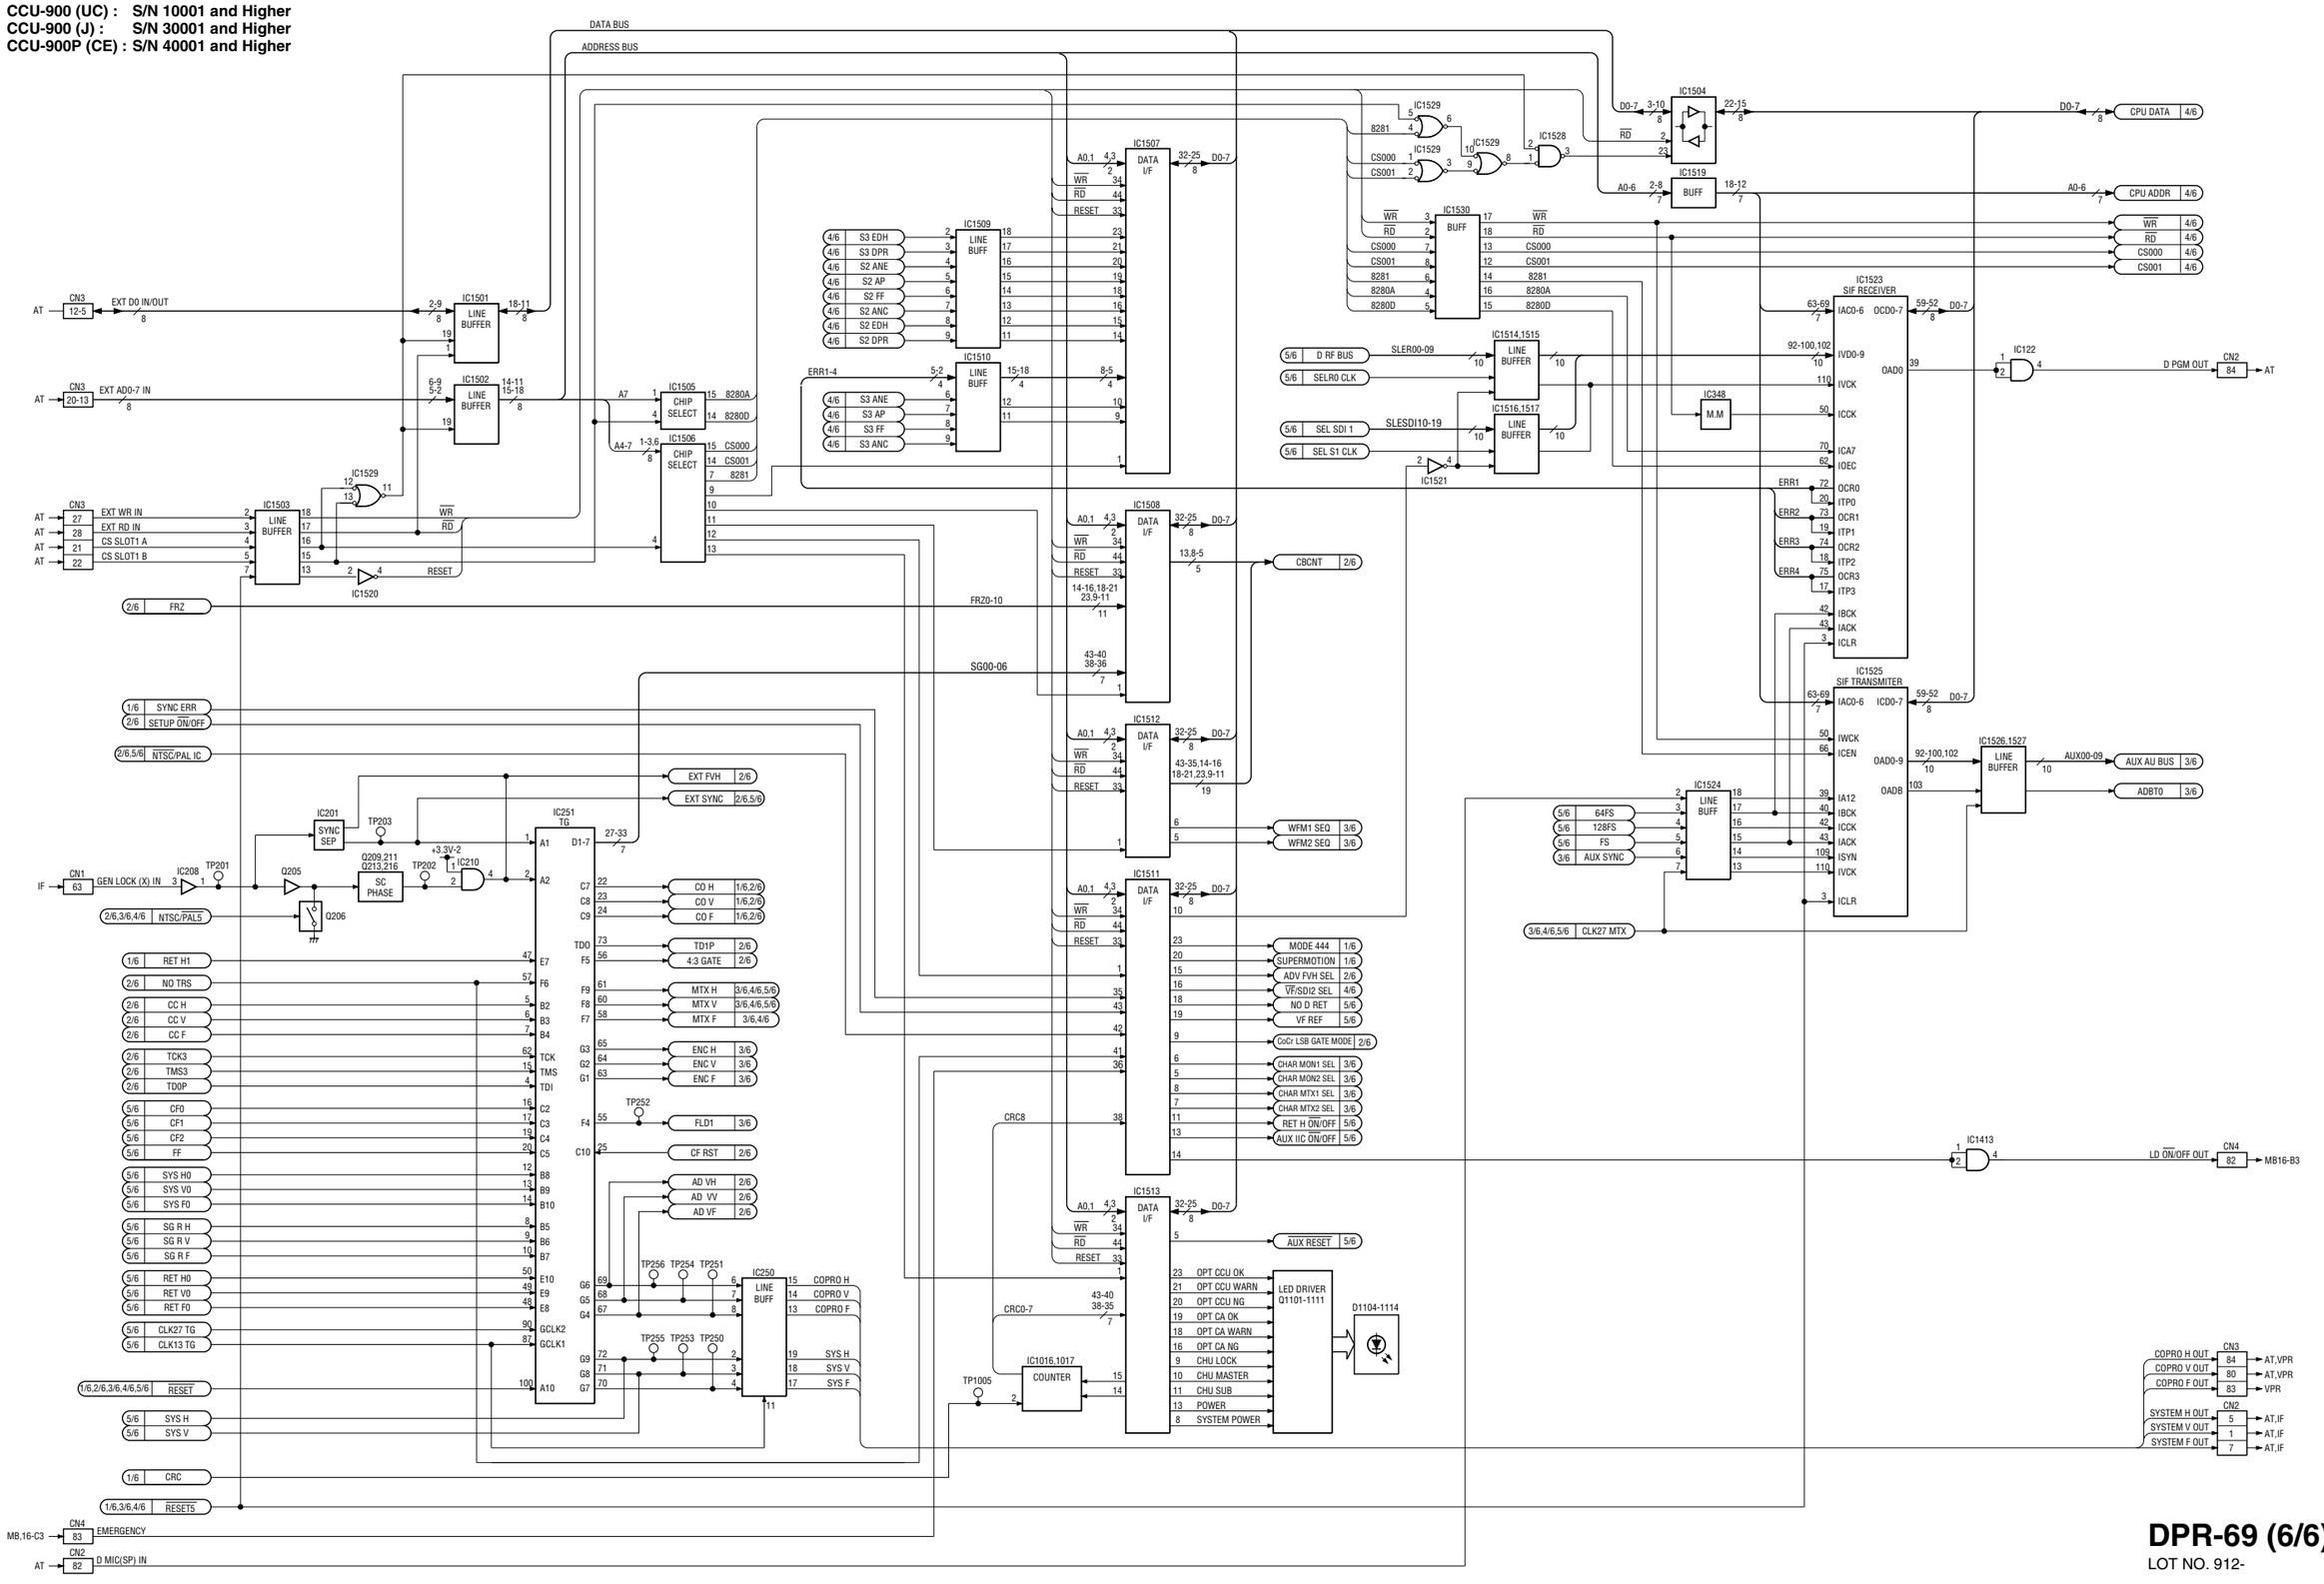

DPR-69 (6/6)
LOT NO. 912-

CCU-900 (UC) : S/N 10001 and Higher
CCU-900 (J) : S/N 30001 and Higher
CCU-900P (CE) : S/N 40001 and Higher

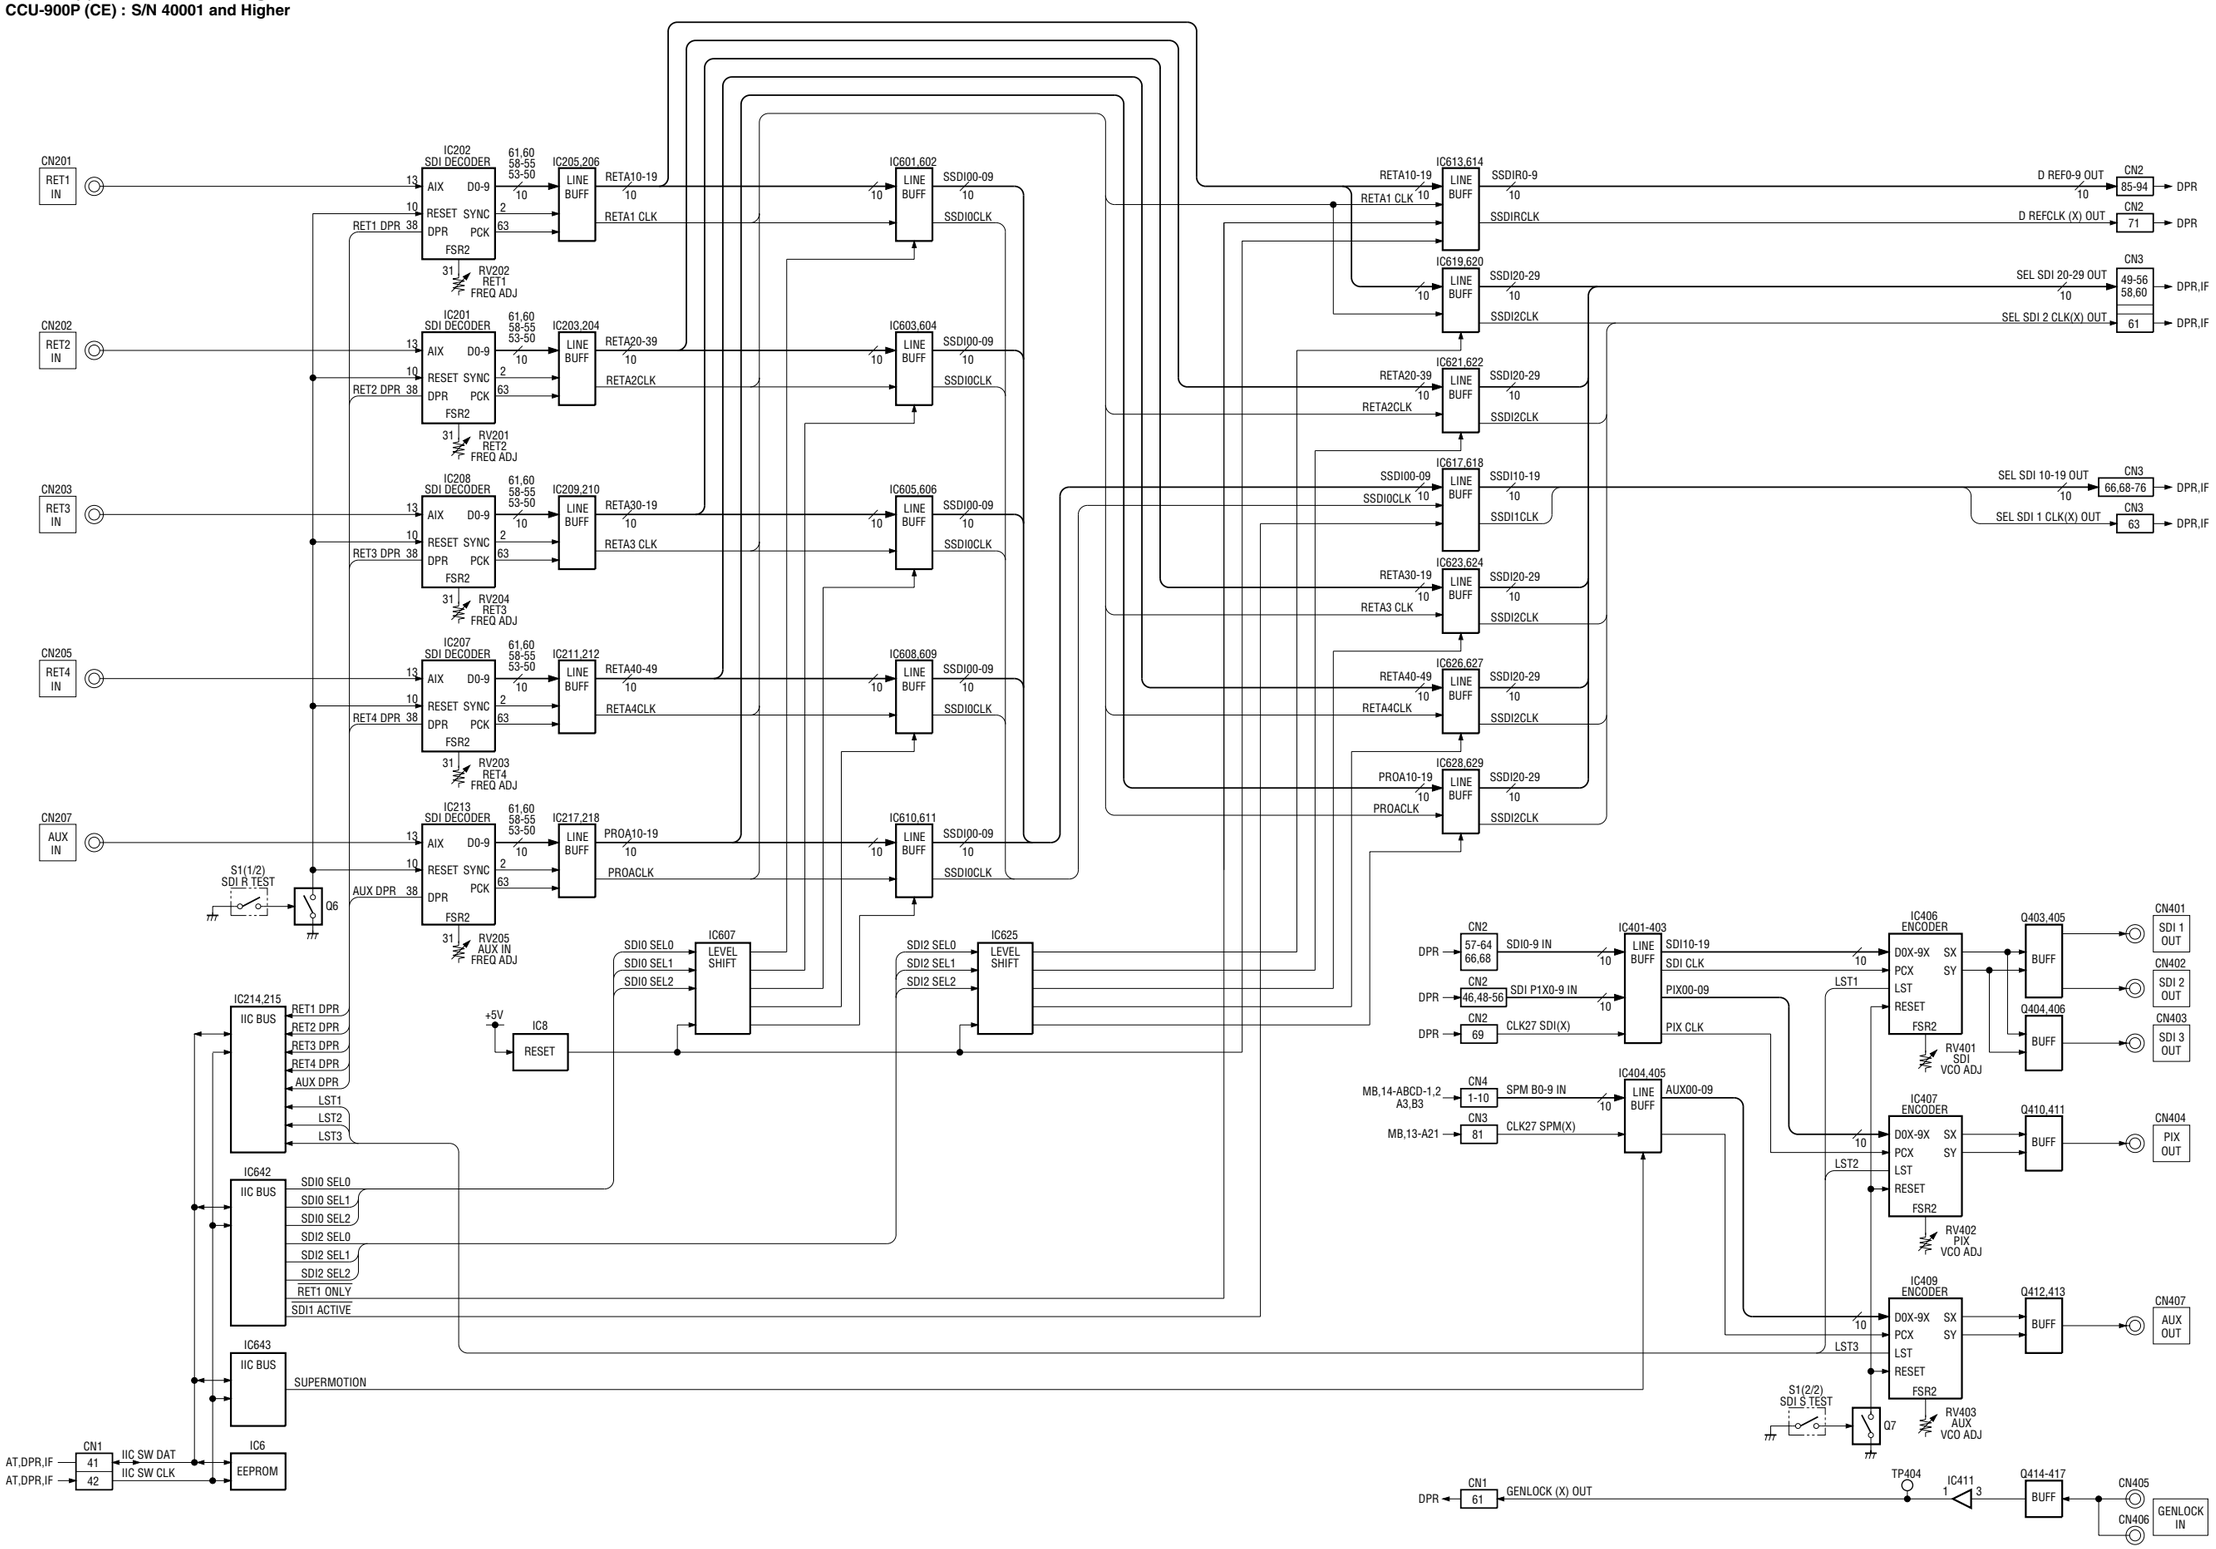

SDI-31
LOT NO. 912-

CCU-900 (UC) : S/N 10001 and Higher
CCU-900 (J) : S/N 30001 and Higher
CCU-900P (CE) : S/N 40001 and Higher

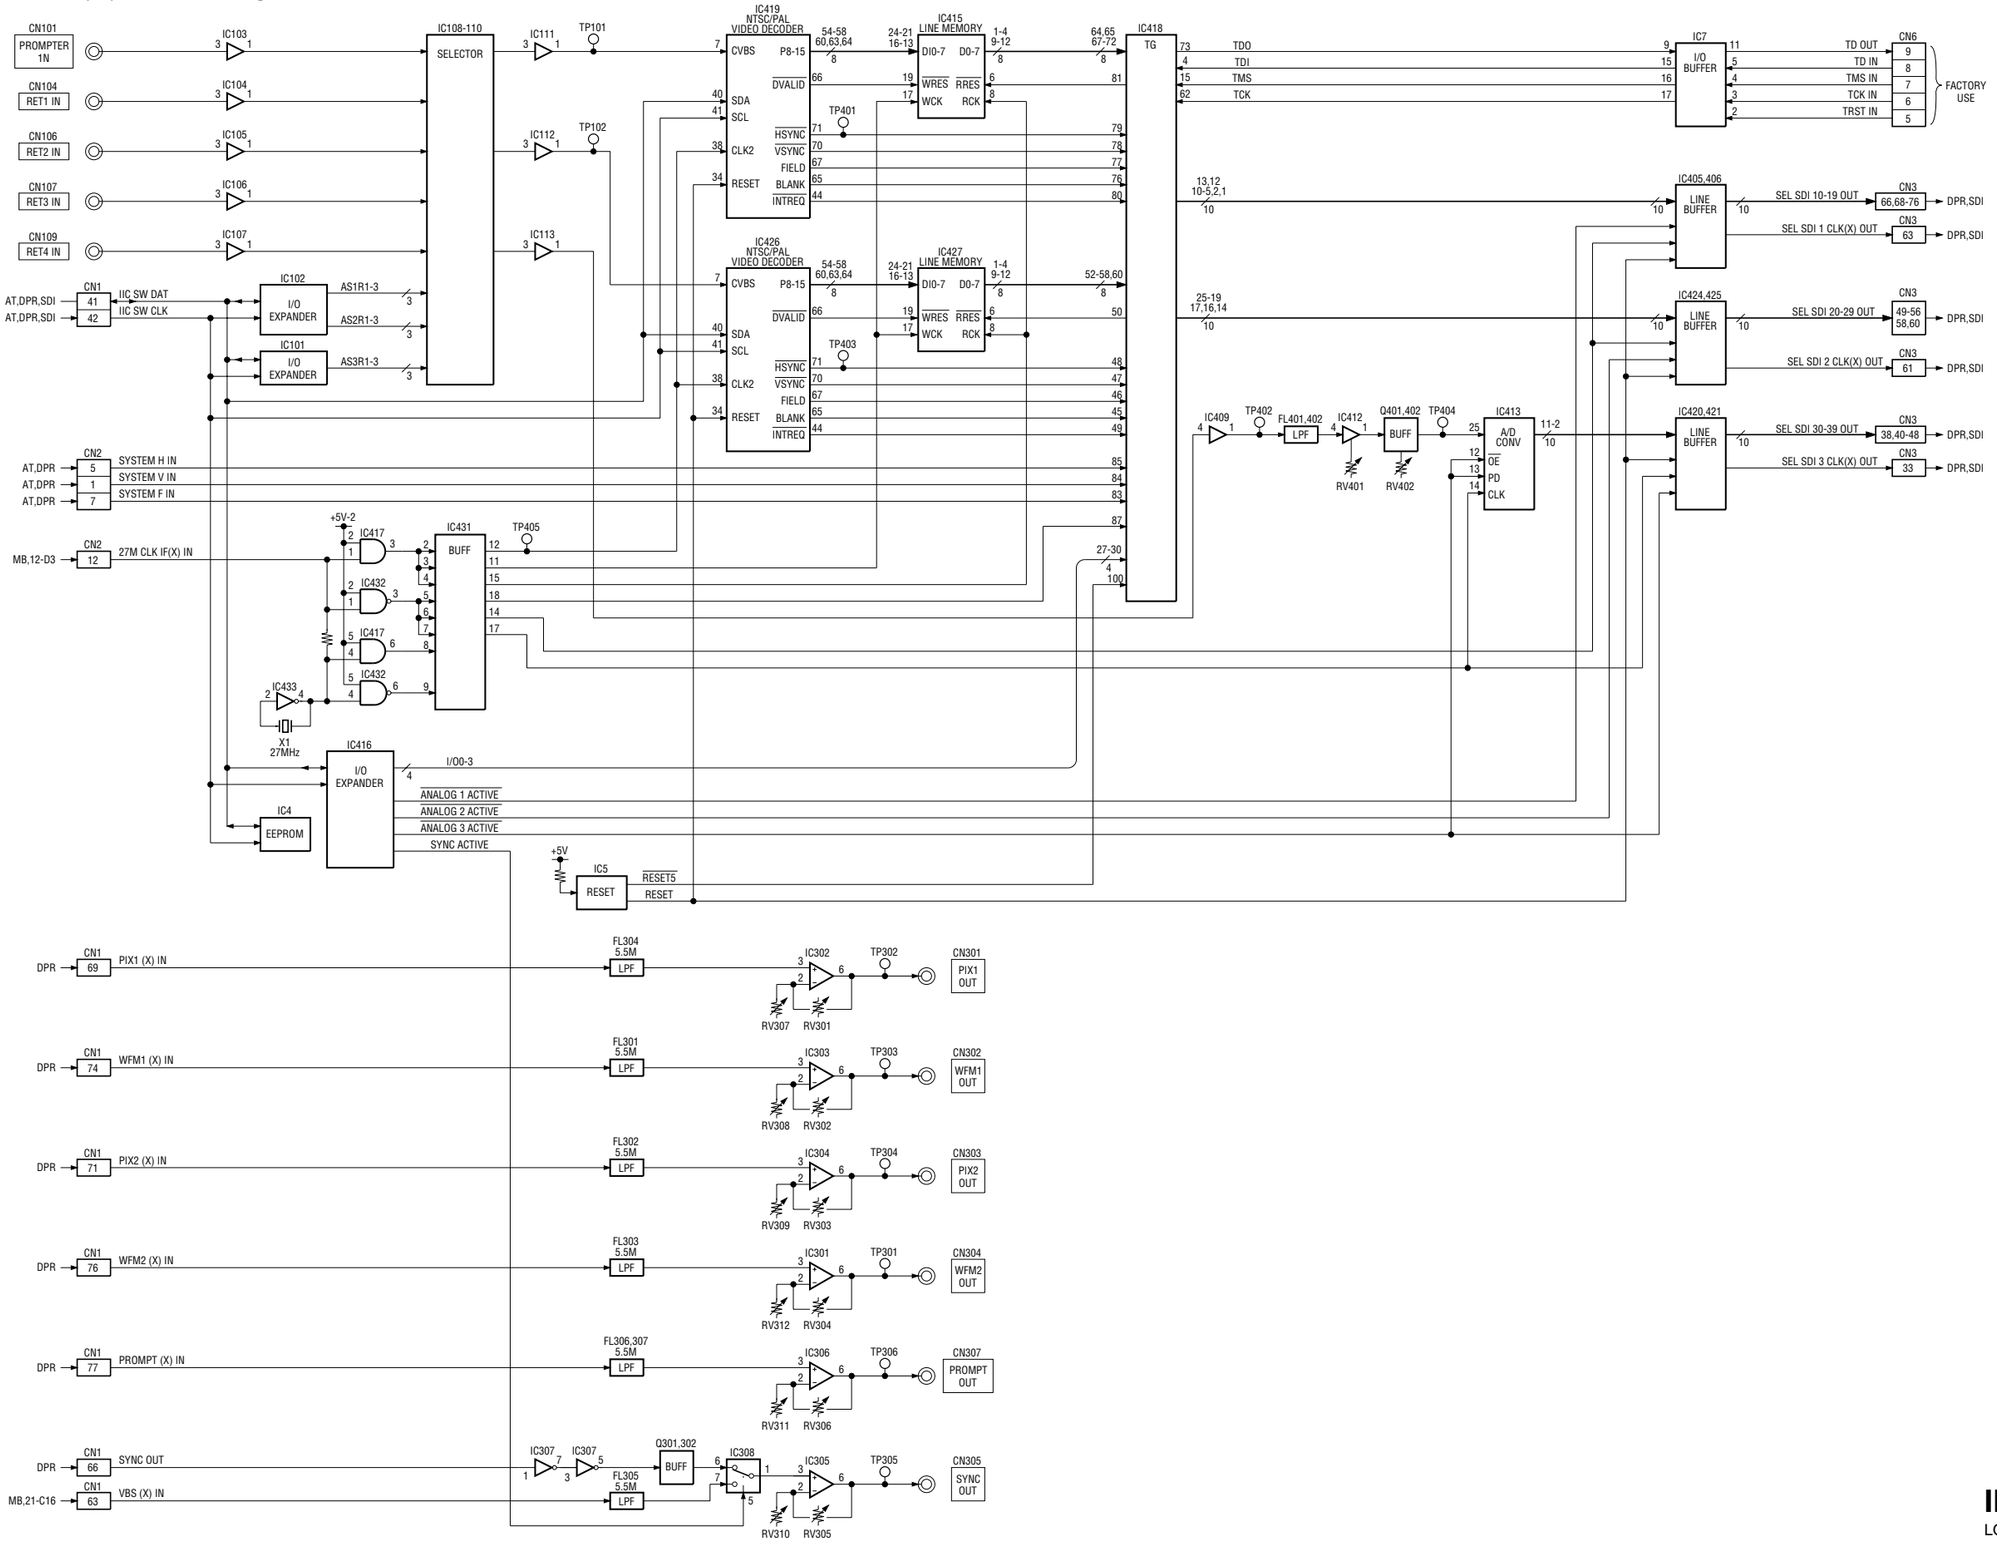

IF-730
LOT NO. 912-

AT-122 (1/3)

CCU-900 (UC) : S/N 10001 and Higher
CCU-900 (J) : S/N 30001 and Higher
CCU-900P (CE) : S/N 40001 and Higher

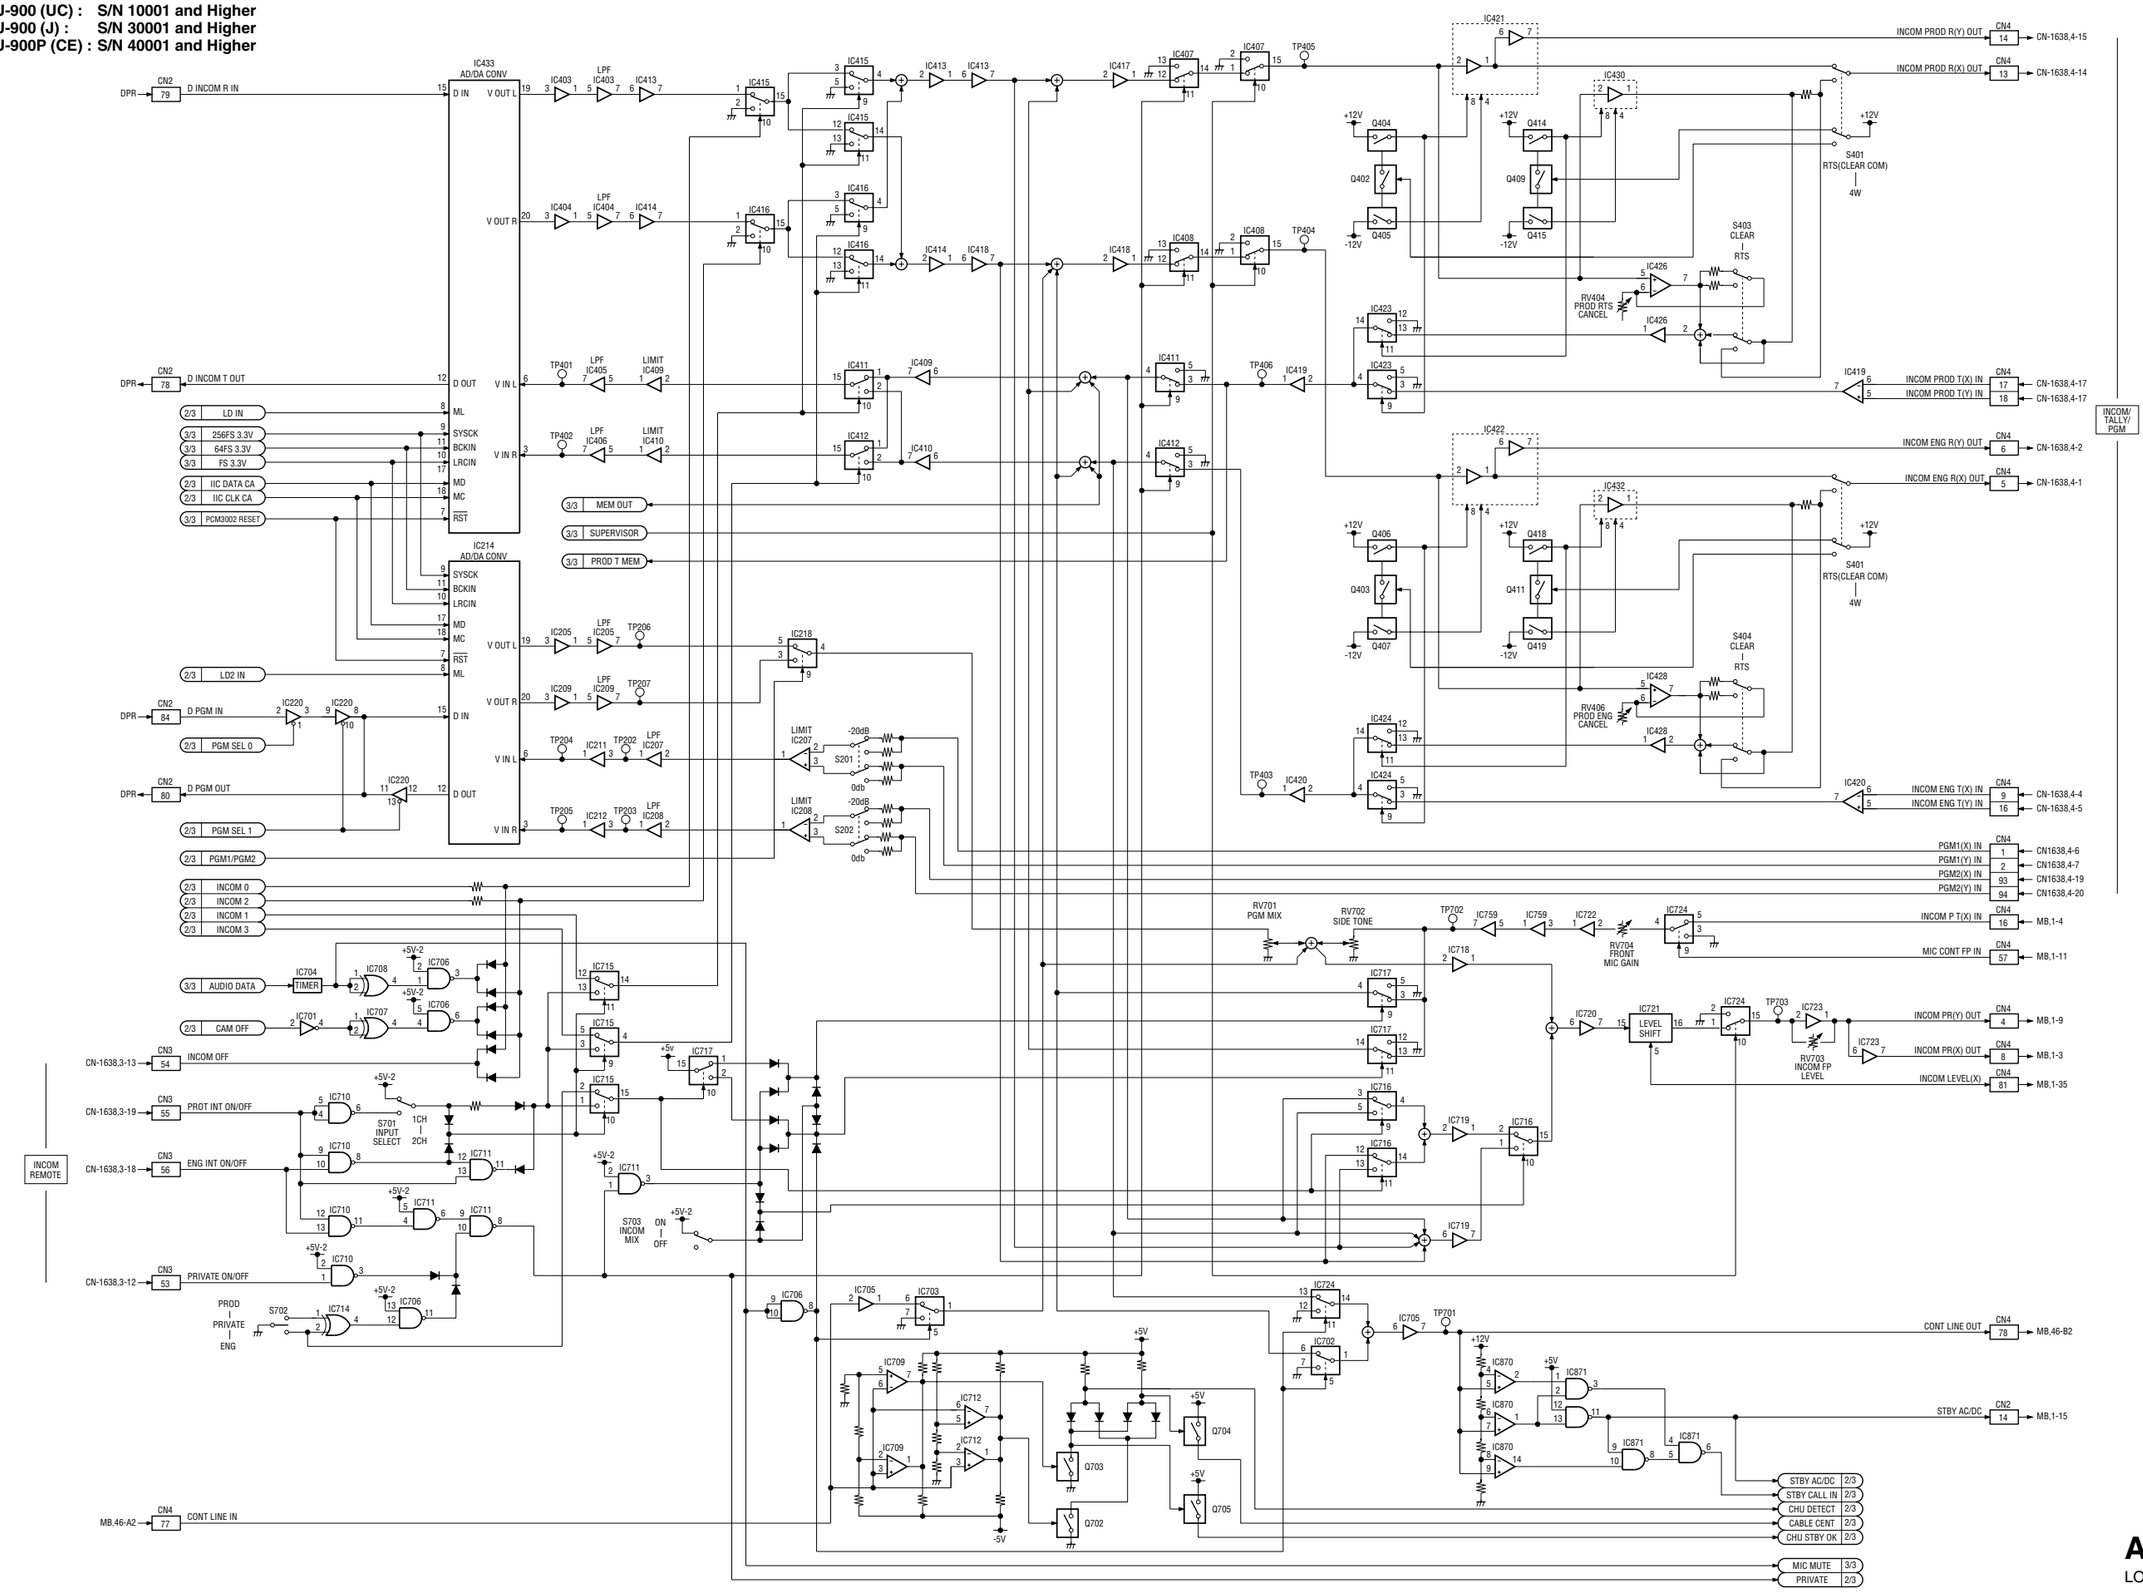

3-12

AT-122 (1/3)
LOT NO. 912-

AT-122 (2/3)

CCU-900 (UC) : S/N 10001 and Higher
CCU-900 (J) : S/N 30001 and Higher
CCU-900P (CE) : S/N 40001 and Higher

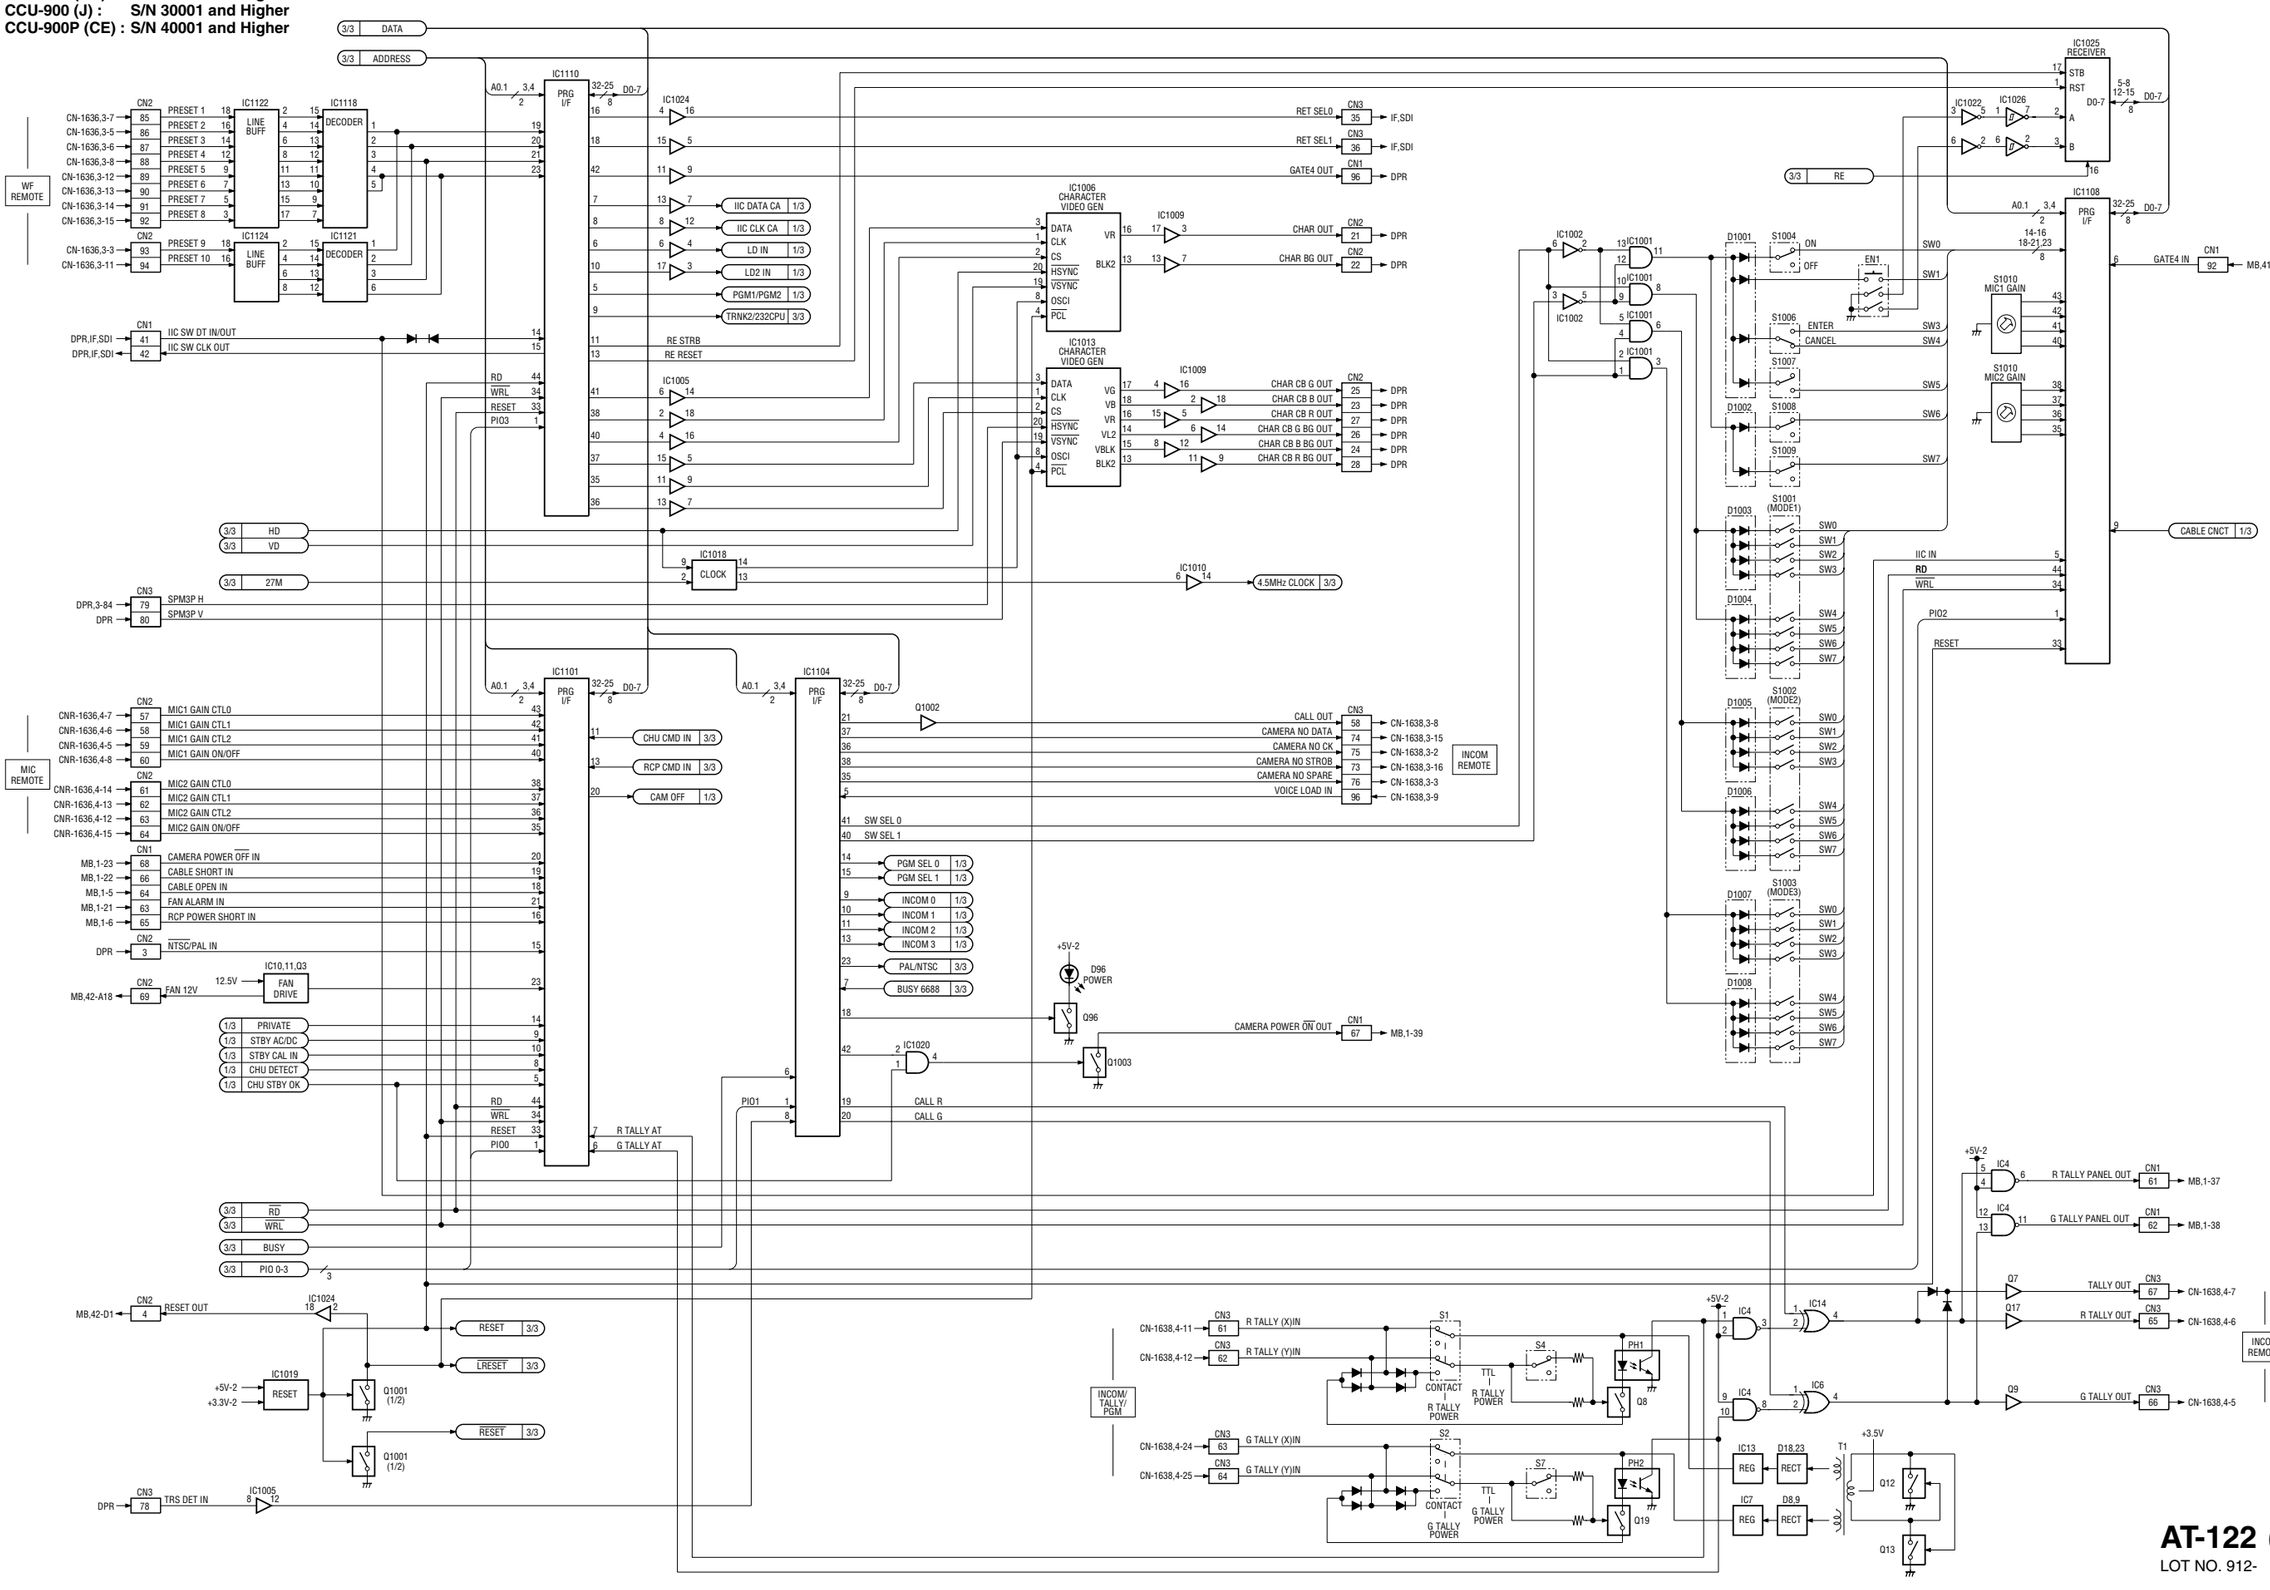

AT-122 (2/3)
LOT NO. 912-

3-13

AT-122 (3/3)

CCU-900 (UC) : S/N 10001 and Higher
CCU-900 (J) : S/N 30001 and Higher
CCU-900P (CE) : S/N 40001 and Higher

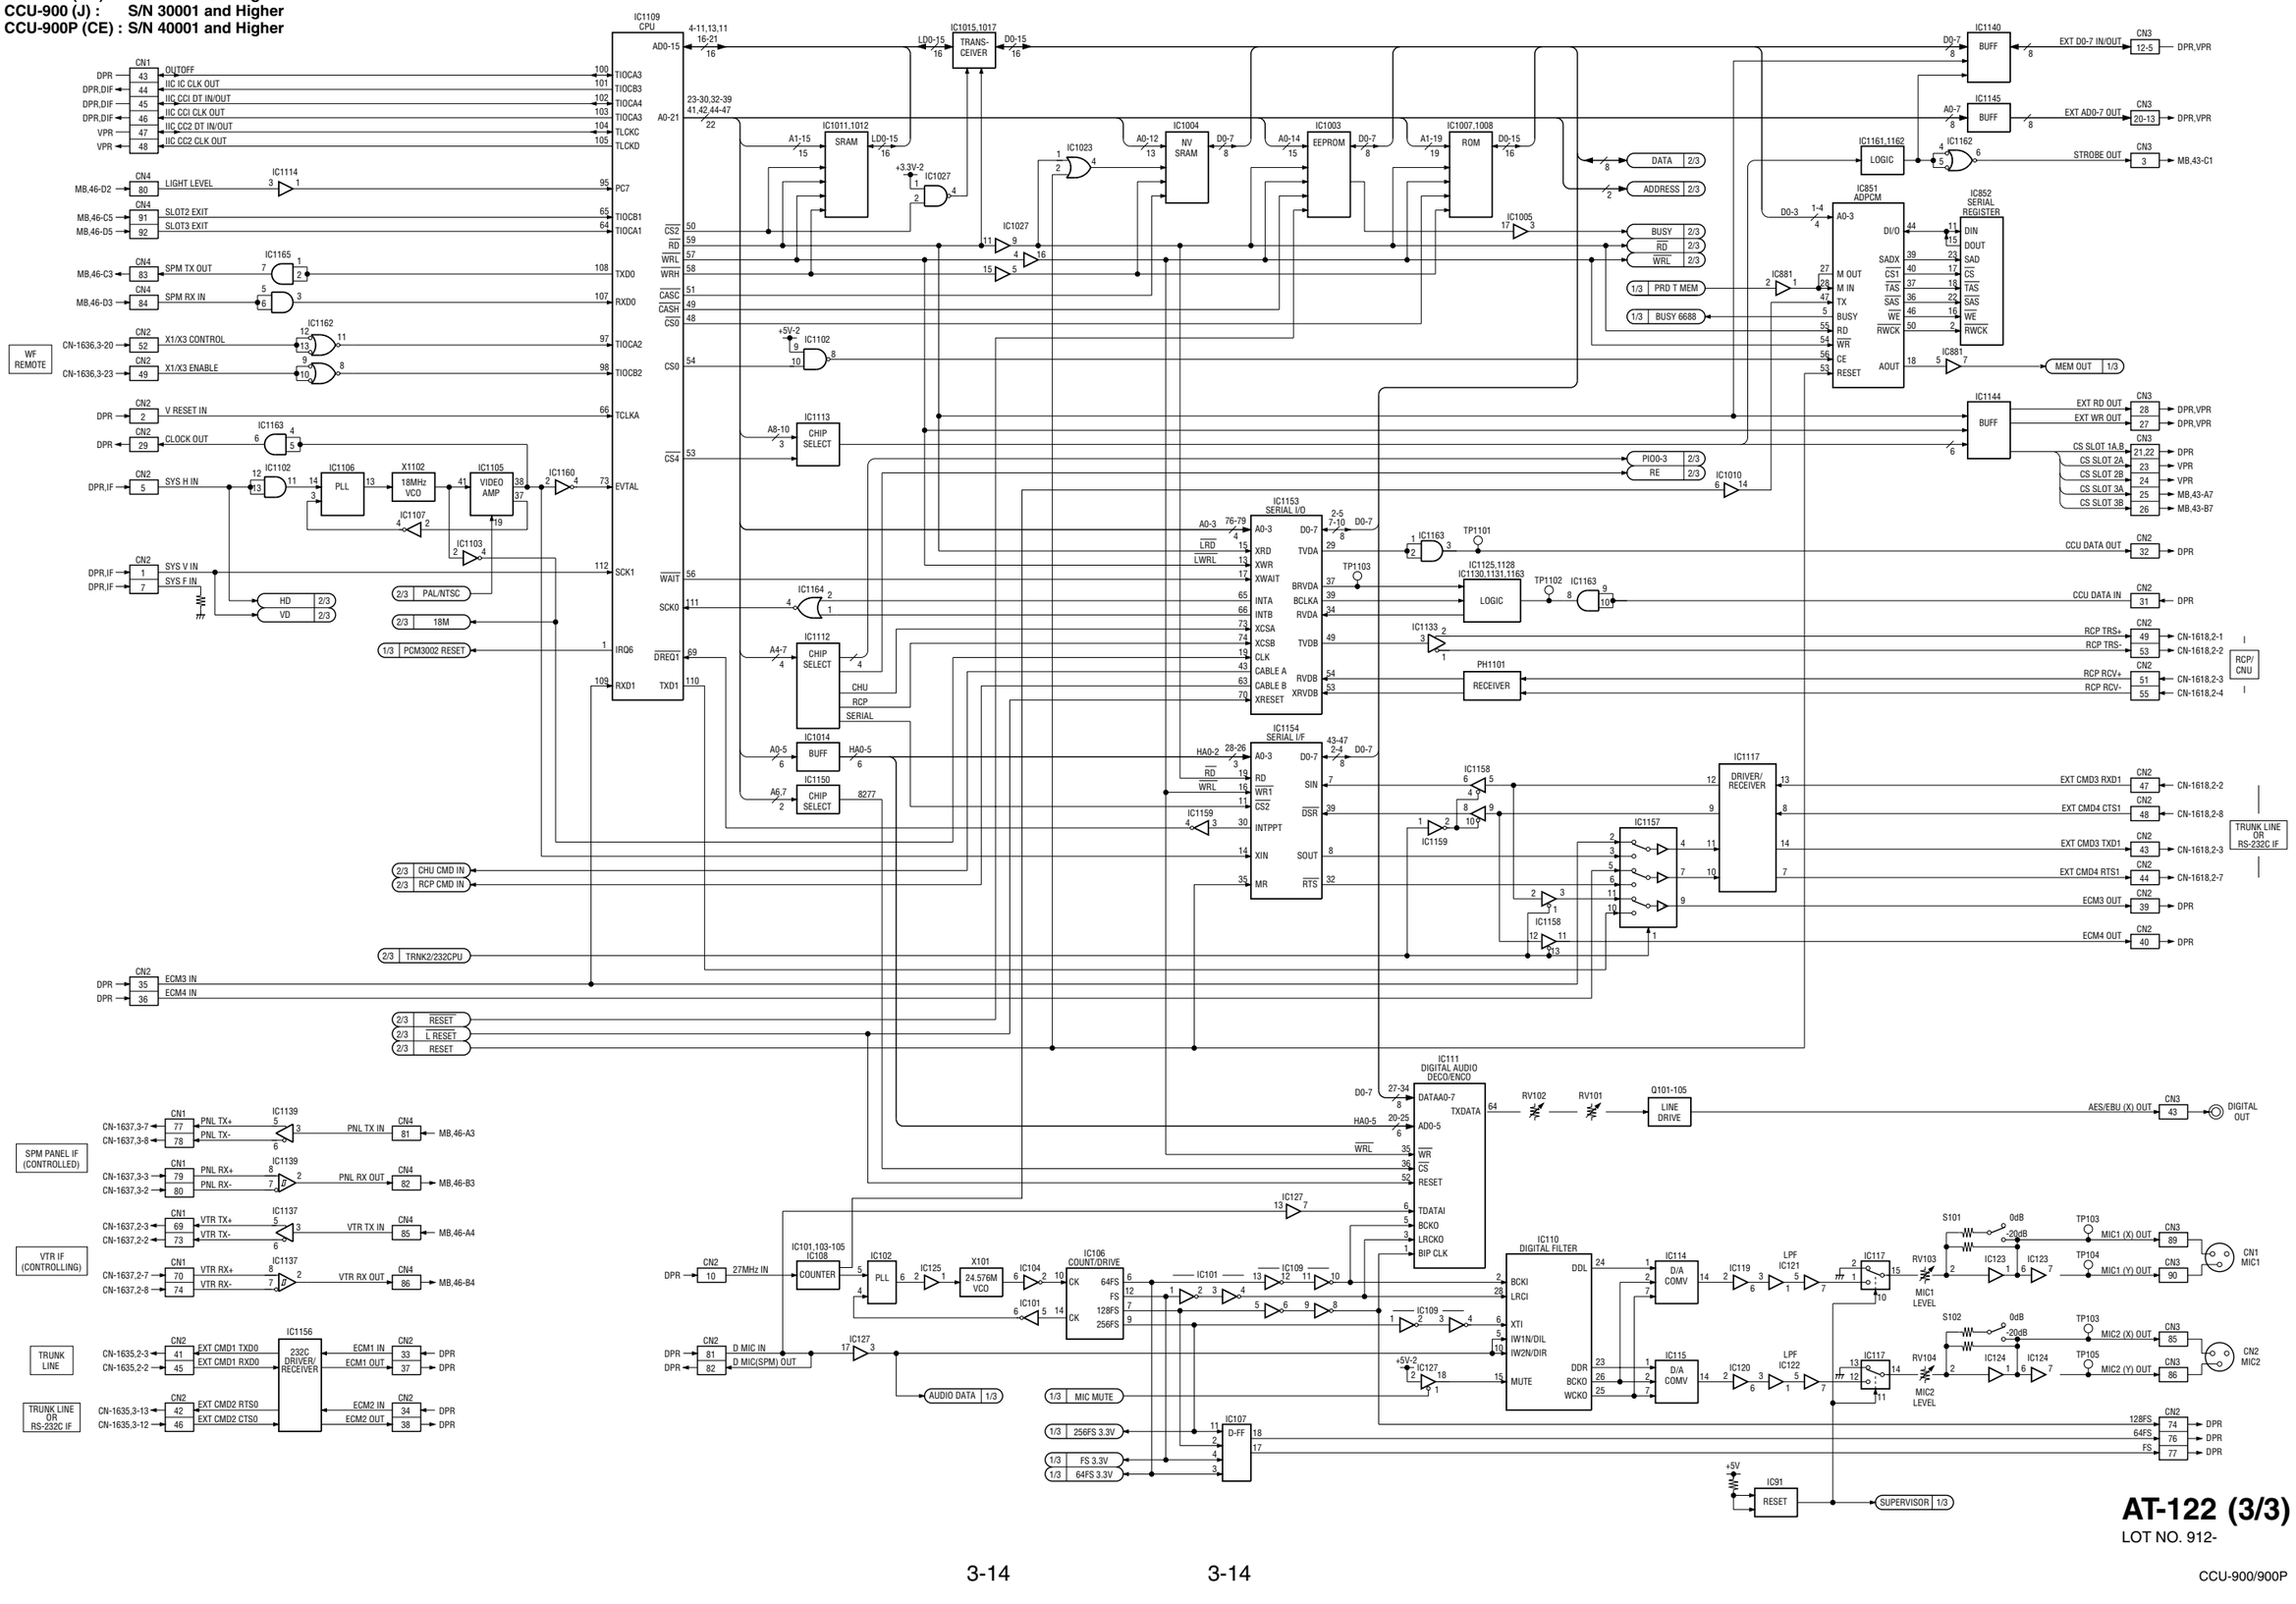

AT-122 (3/3)
LOT NO. 912-

3-14

BKP-9330 (SY) : S/N 10001 and Higher

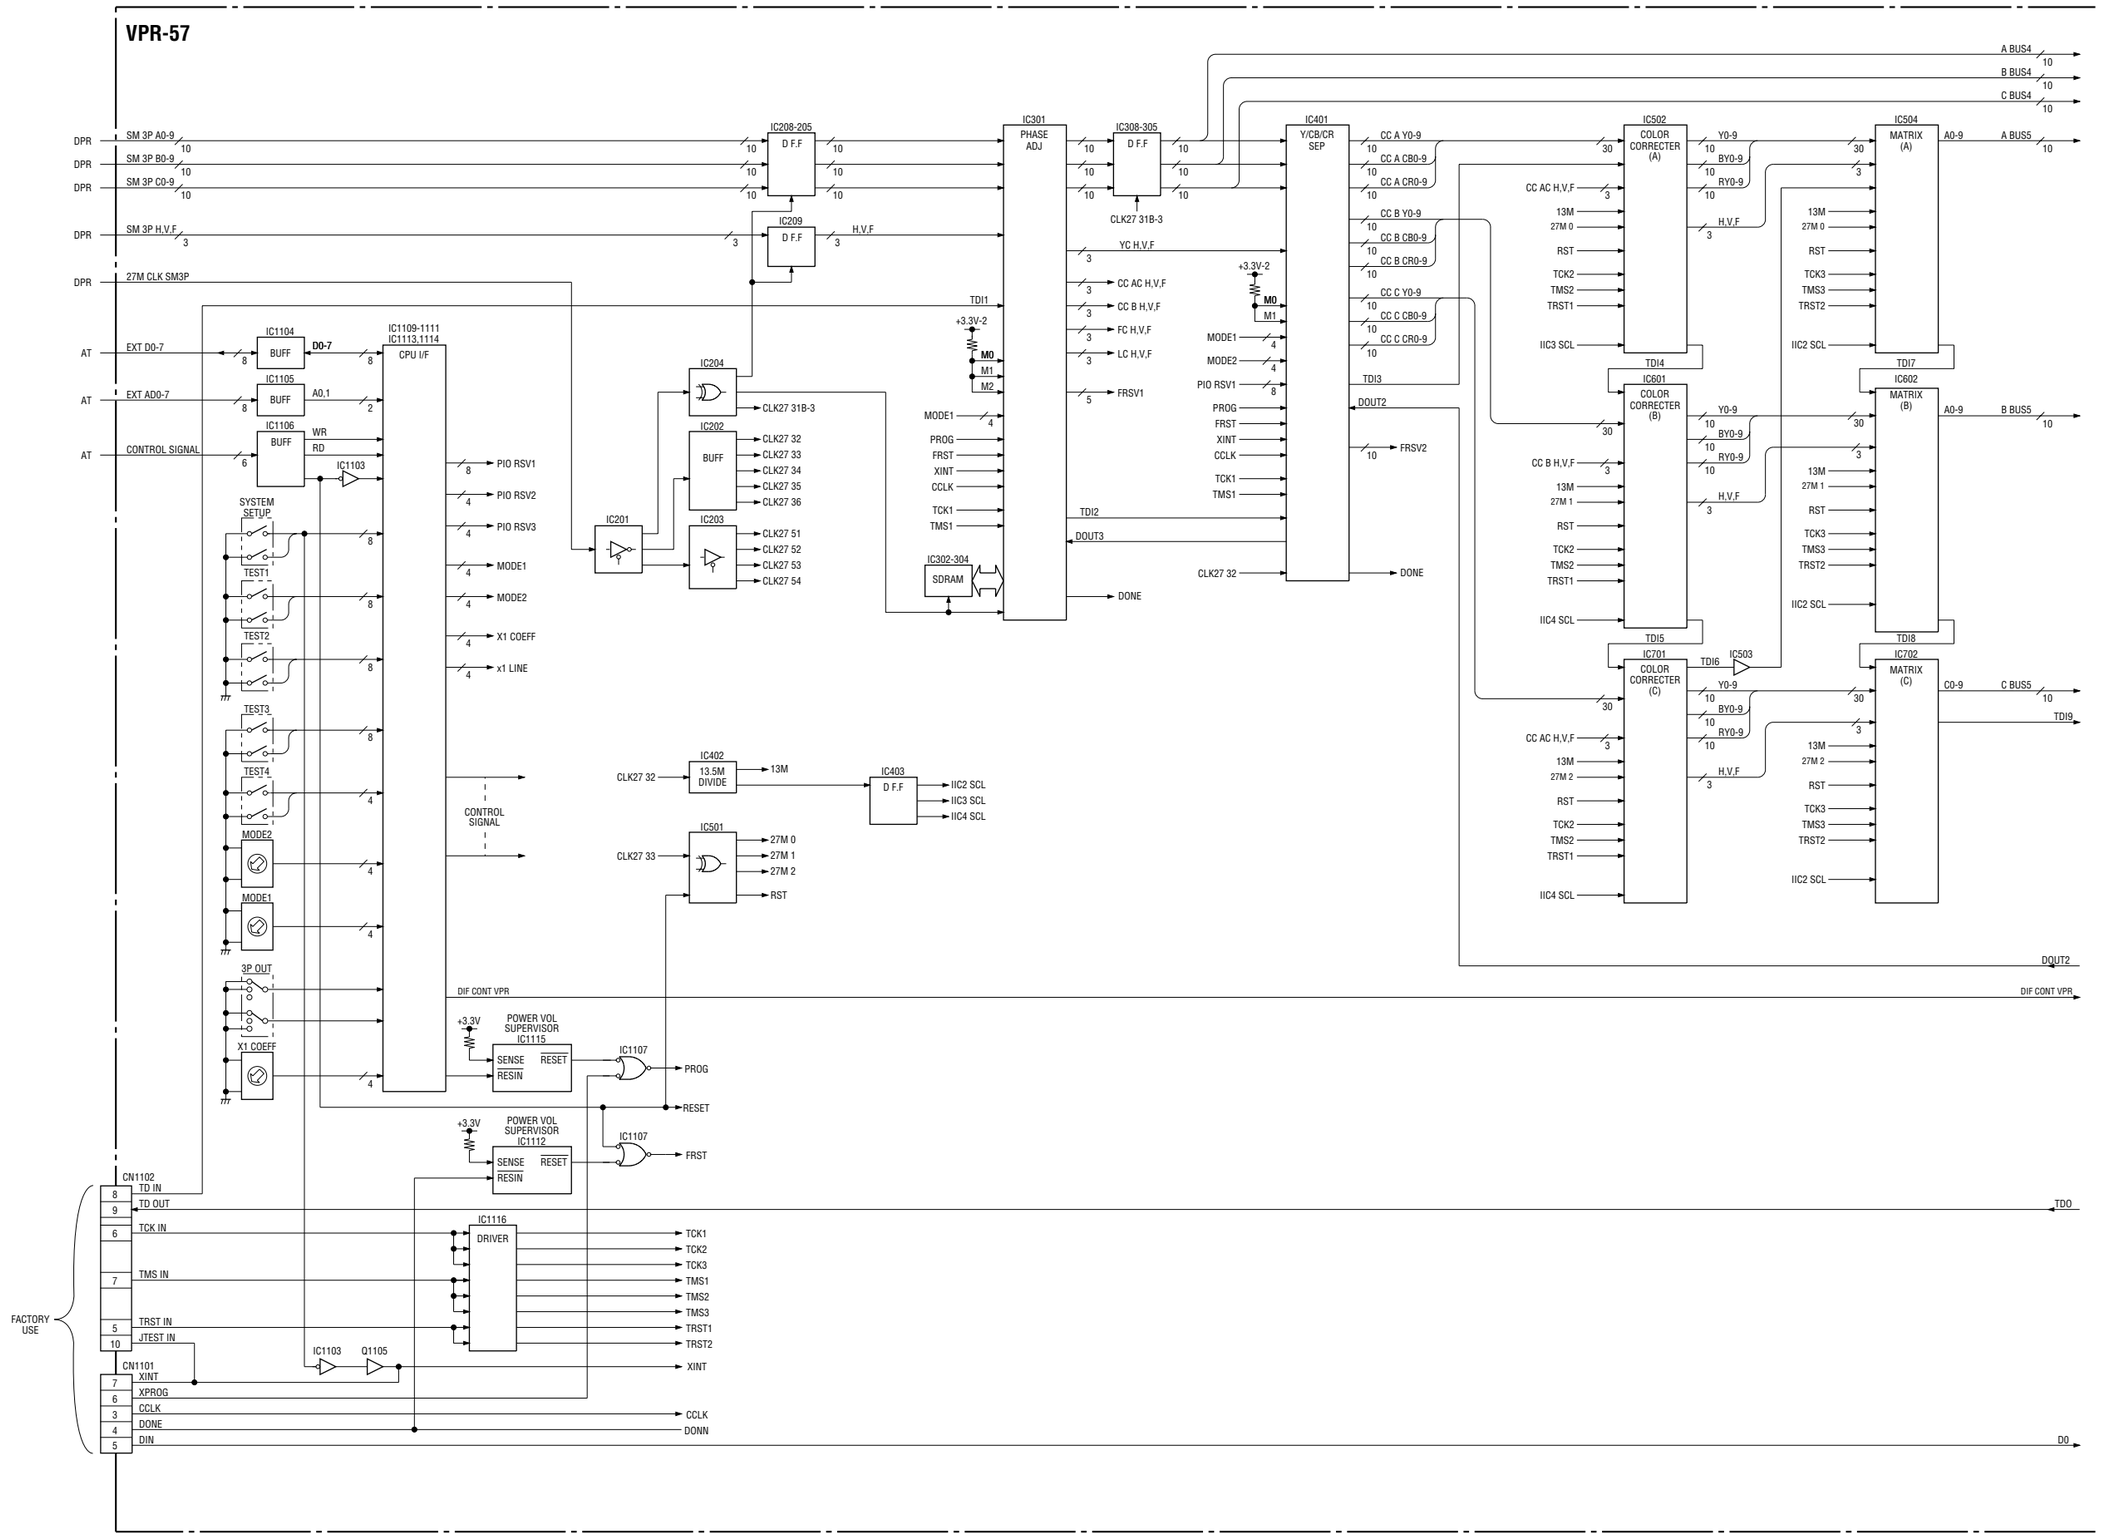

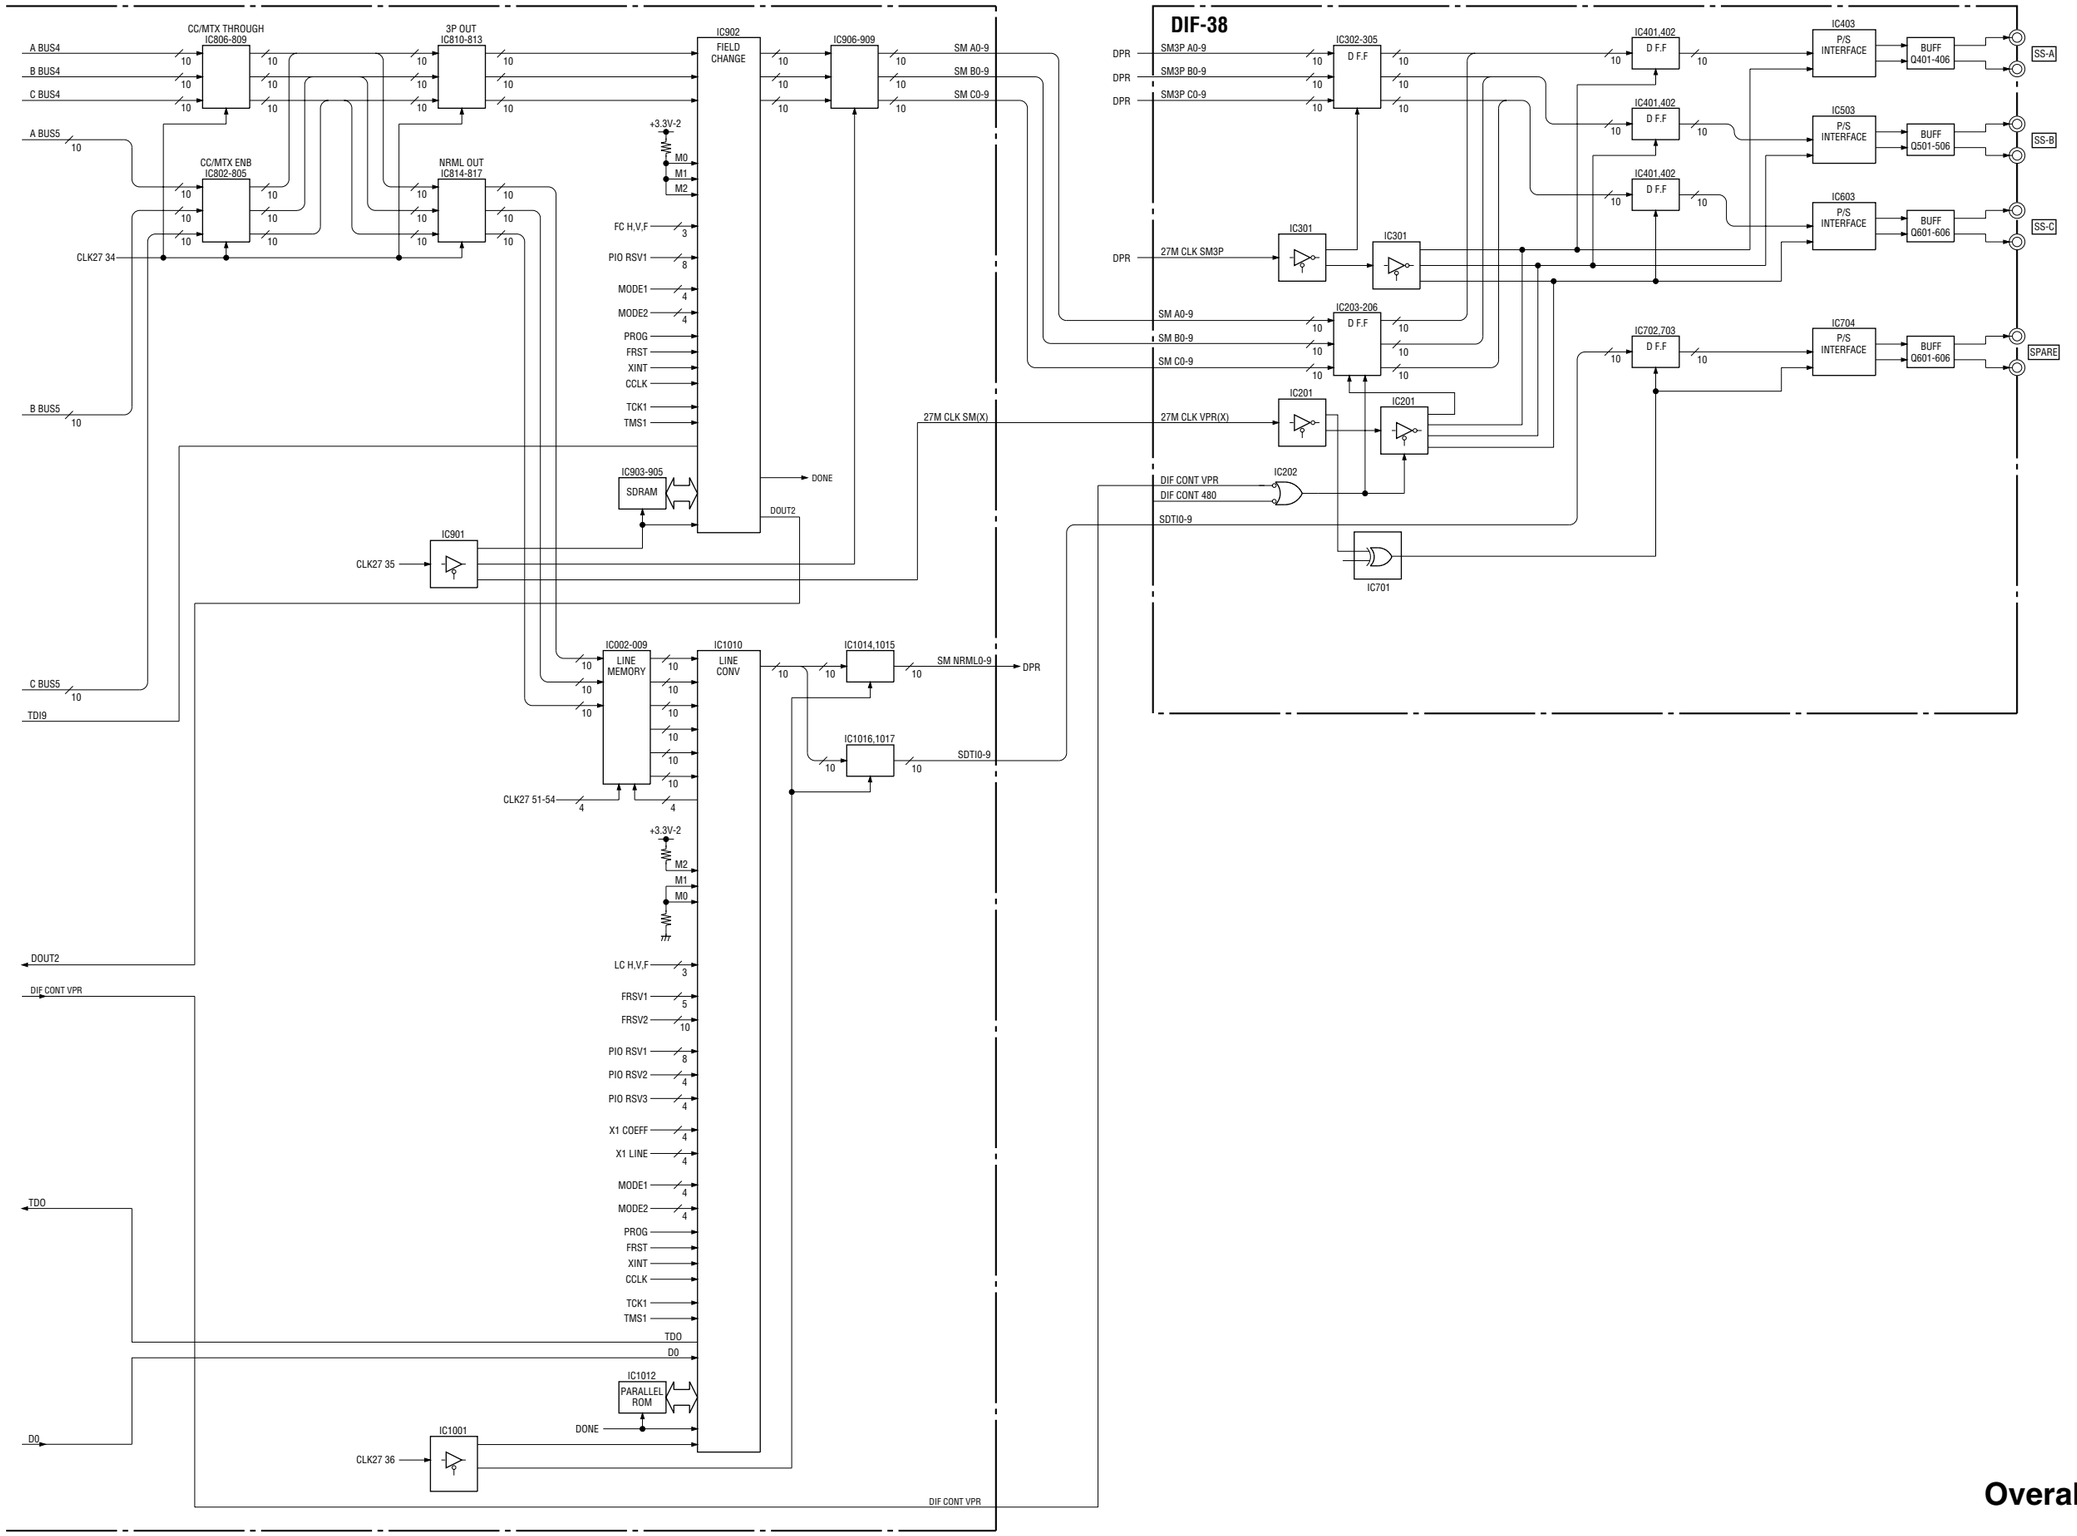
DIF-38
A BUS4
B BUS4
C BUS4
A BUS5
B BUS5
C BUS5
TDI9
CLK27 34
CLK27 35
CC/MTX THROUGH IC806-809
CC/MTX ENB IC802-805
3P OUT IC810-813
NRML OUT IC814-817
IC902 FIELD CHANGE
IC906-909
SM A0-9
SM B0-9
SM C0-9
+3.3V-2
M0
M1
M2
FC H,V,F
PIO RSV1
MODE1
MODE2
PROG
FRST
XINT
CCLK
TCK1
TMS1
IC903-905 SDRAM
DONE
DOUT2
IC901
27M CLK SM(X)
IC002-009 LINE MEMORY
IC1010 LINE CONV
IC1014,1015
SM NRML0-9
DPR
IC1016,1017
SDTI0-9
CLK27 51-54
LC H,V,F
FRSV1
FRSV2
PIO RSV2
PIO RSV3
X1 COEFF
X1 LINE
TDO
D0
IC1012 PARALLEL ROM
IC1001
CLK27 36
DIF CONT VPR
IC302-305 D F.F
IC401,402 D F.F
IC403 P/S INTERFACE
BUFF Q401-406
SS-A
IC503 P/S INTERFACE
BUFF Q501-506
SS-B
IC603 P/S INTERFACE
BUFF Q601-606
SS-C
IC704 P/S INTERFACE
BUFF Q601-606
SPARE
IC702,703 D F.F
IC301
27M CLK SM3P
IC203-206 D F.F
IC201
27M CLK VPR(X)
IC202
DIF CONT 480
SDTI0-9
IC701

BKP-9330 (SY) : S/N 10001 and Higher

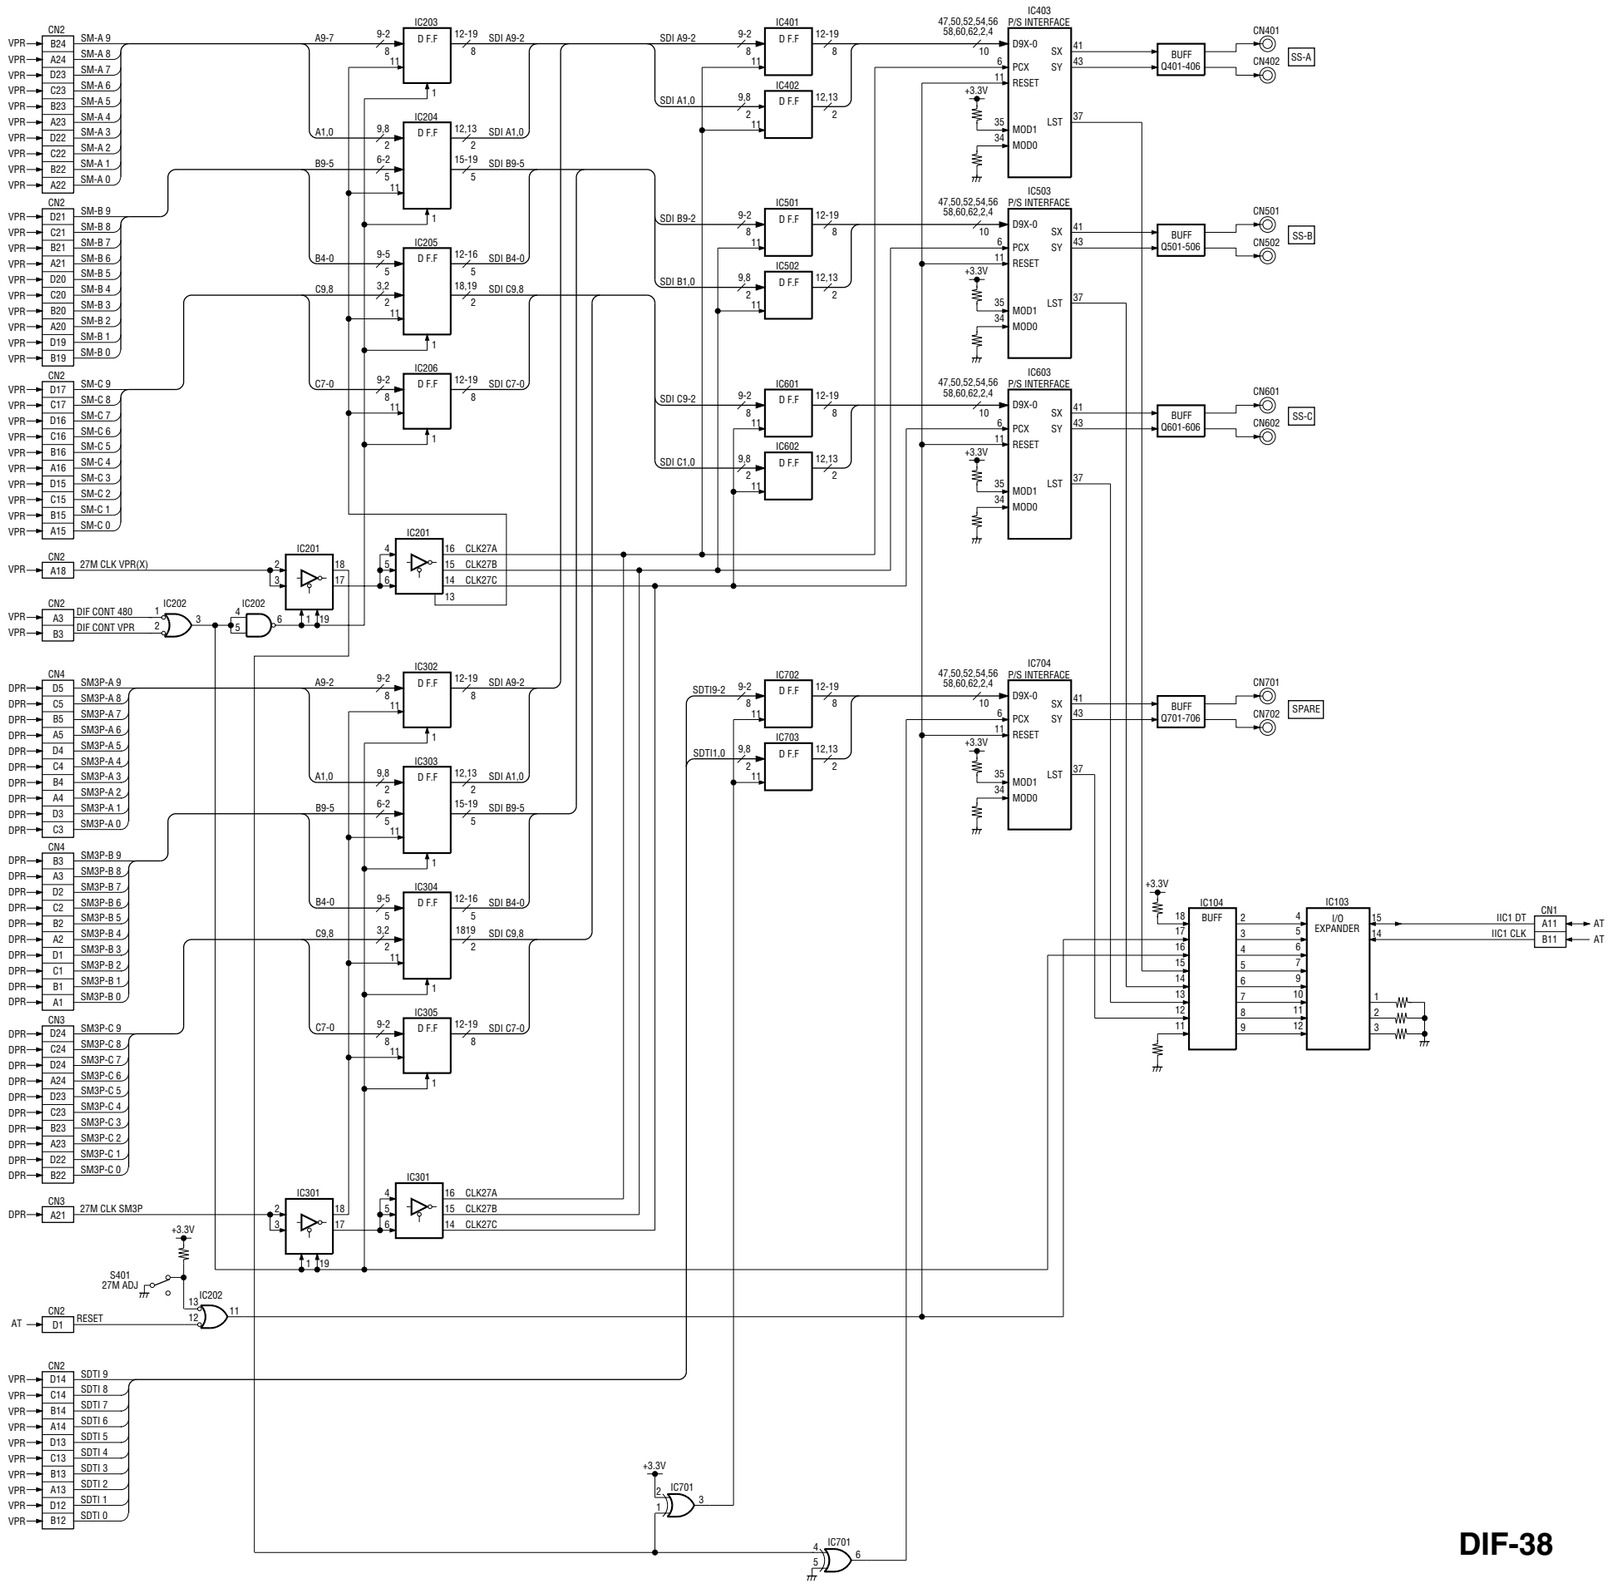

DIF-38

BKP-9330 (SY) : S/N 10001 and Higher

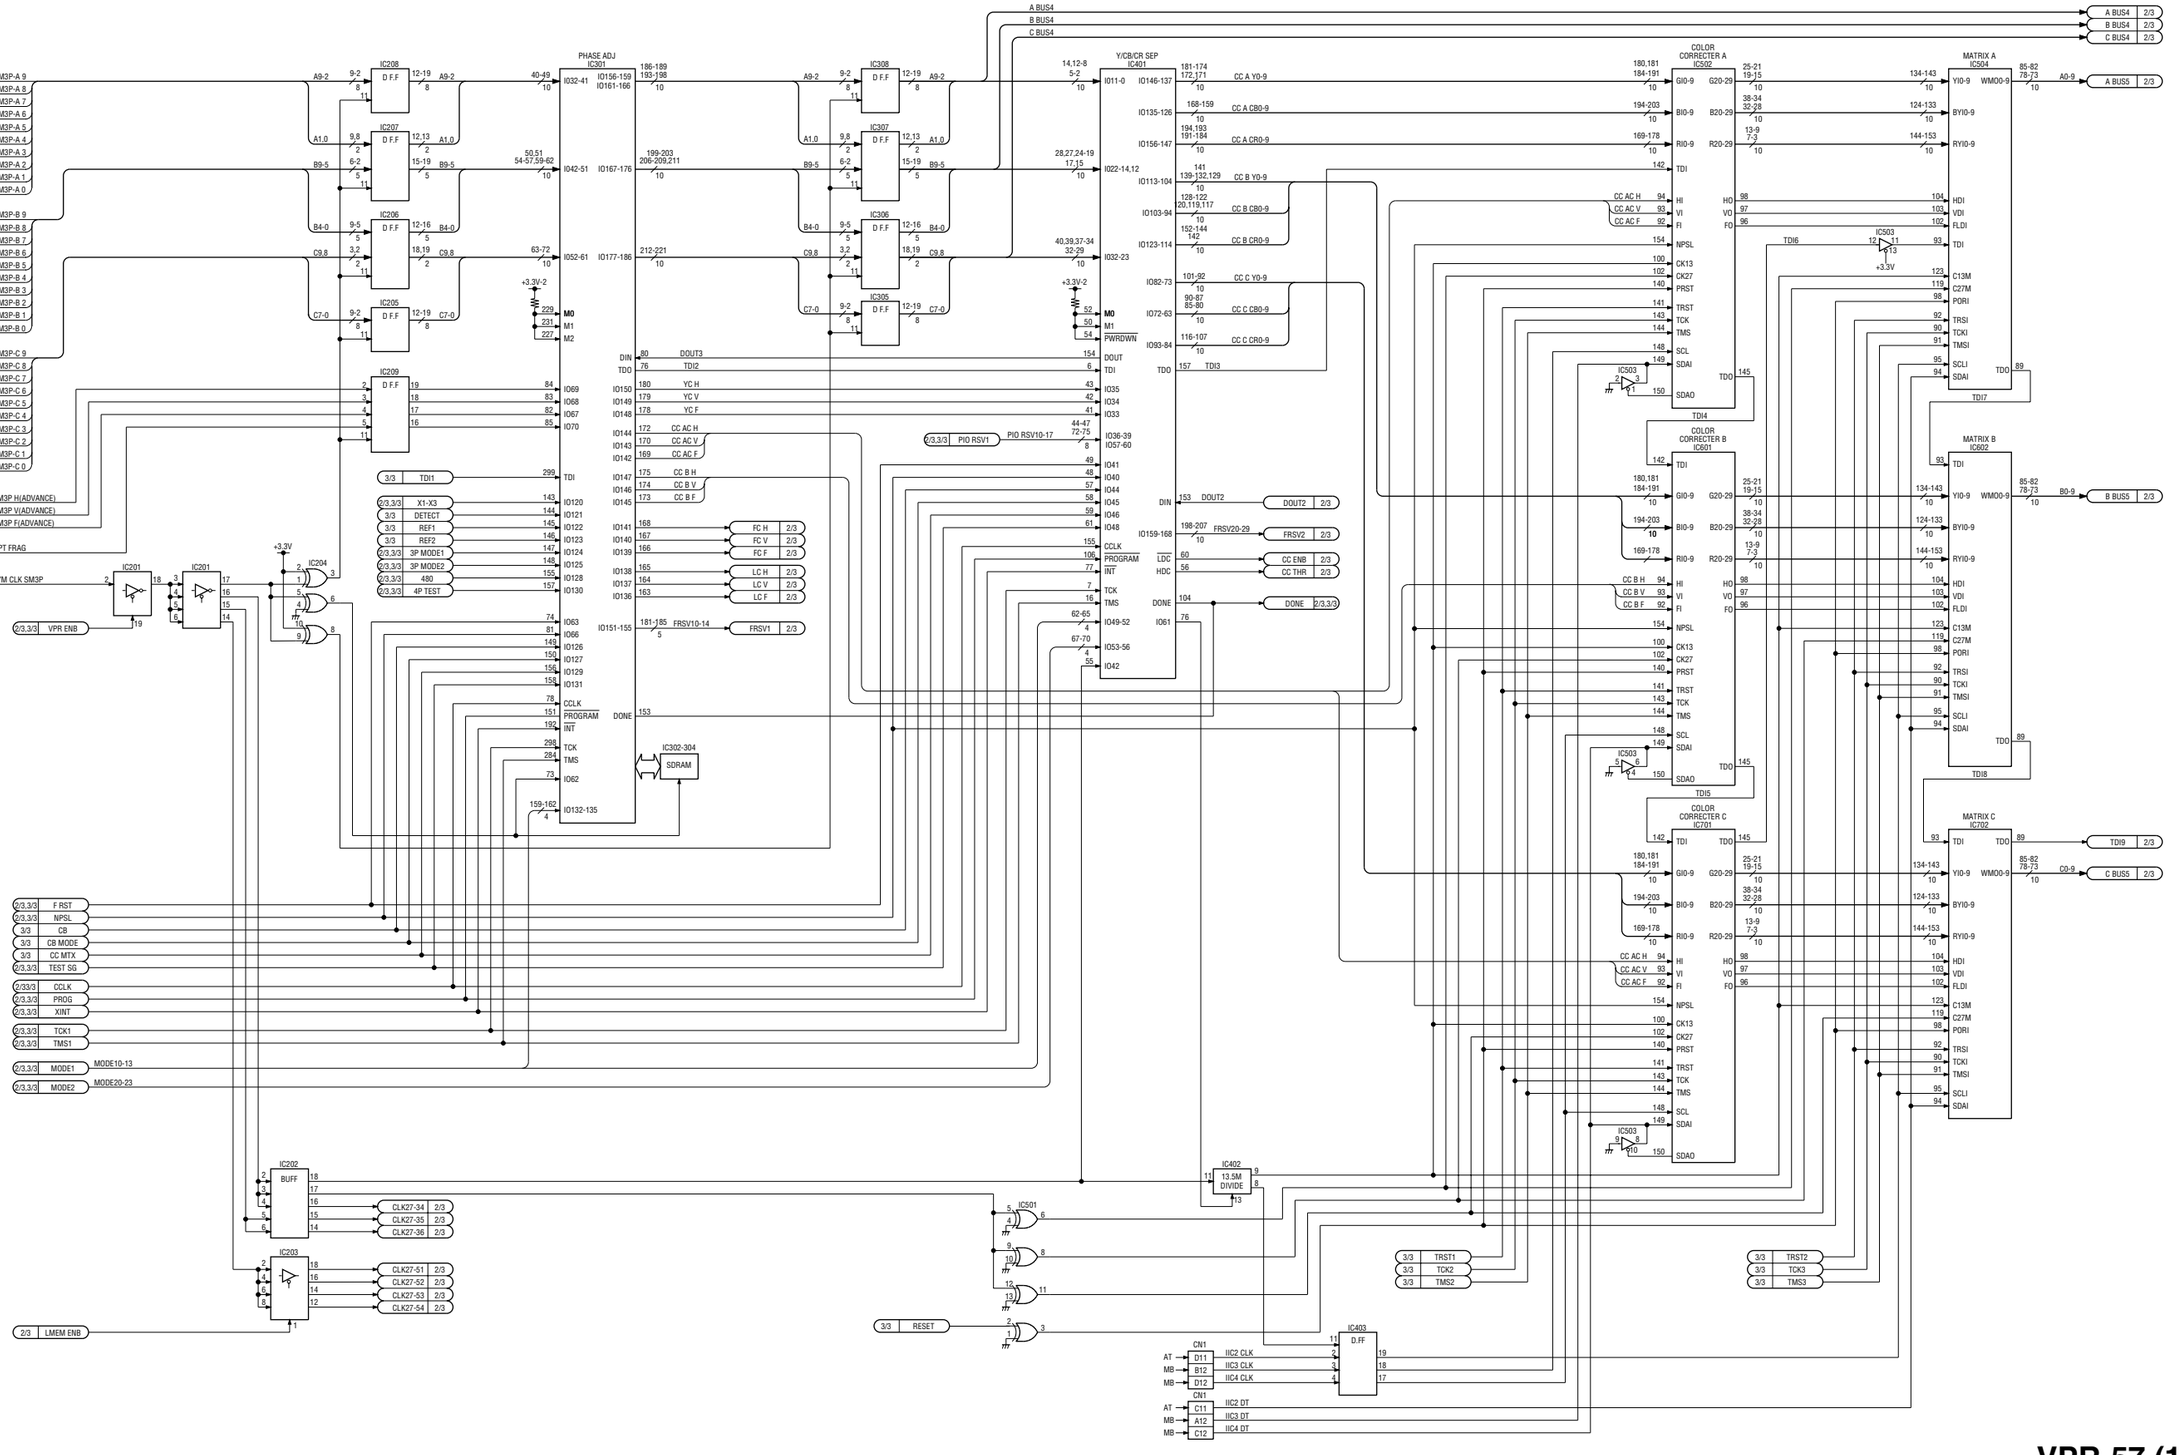

VPR-57 (1/3)

BKP-9330 (SY) : S/N 10001 and Higher

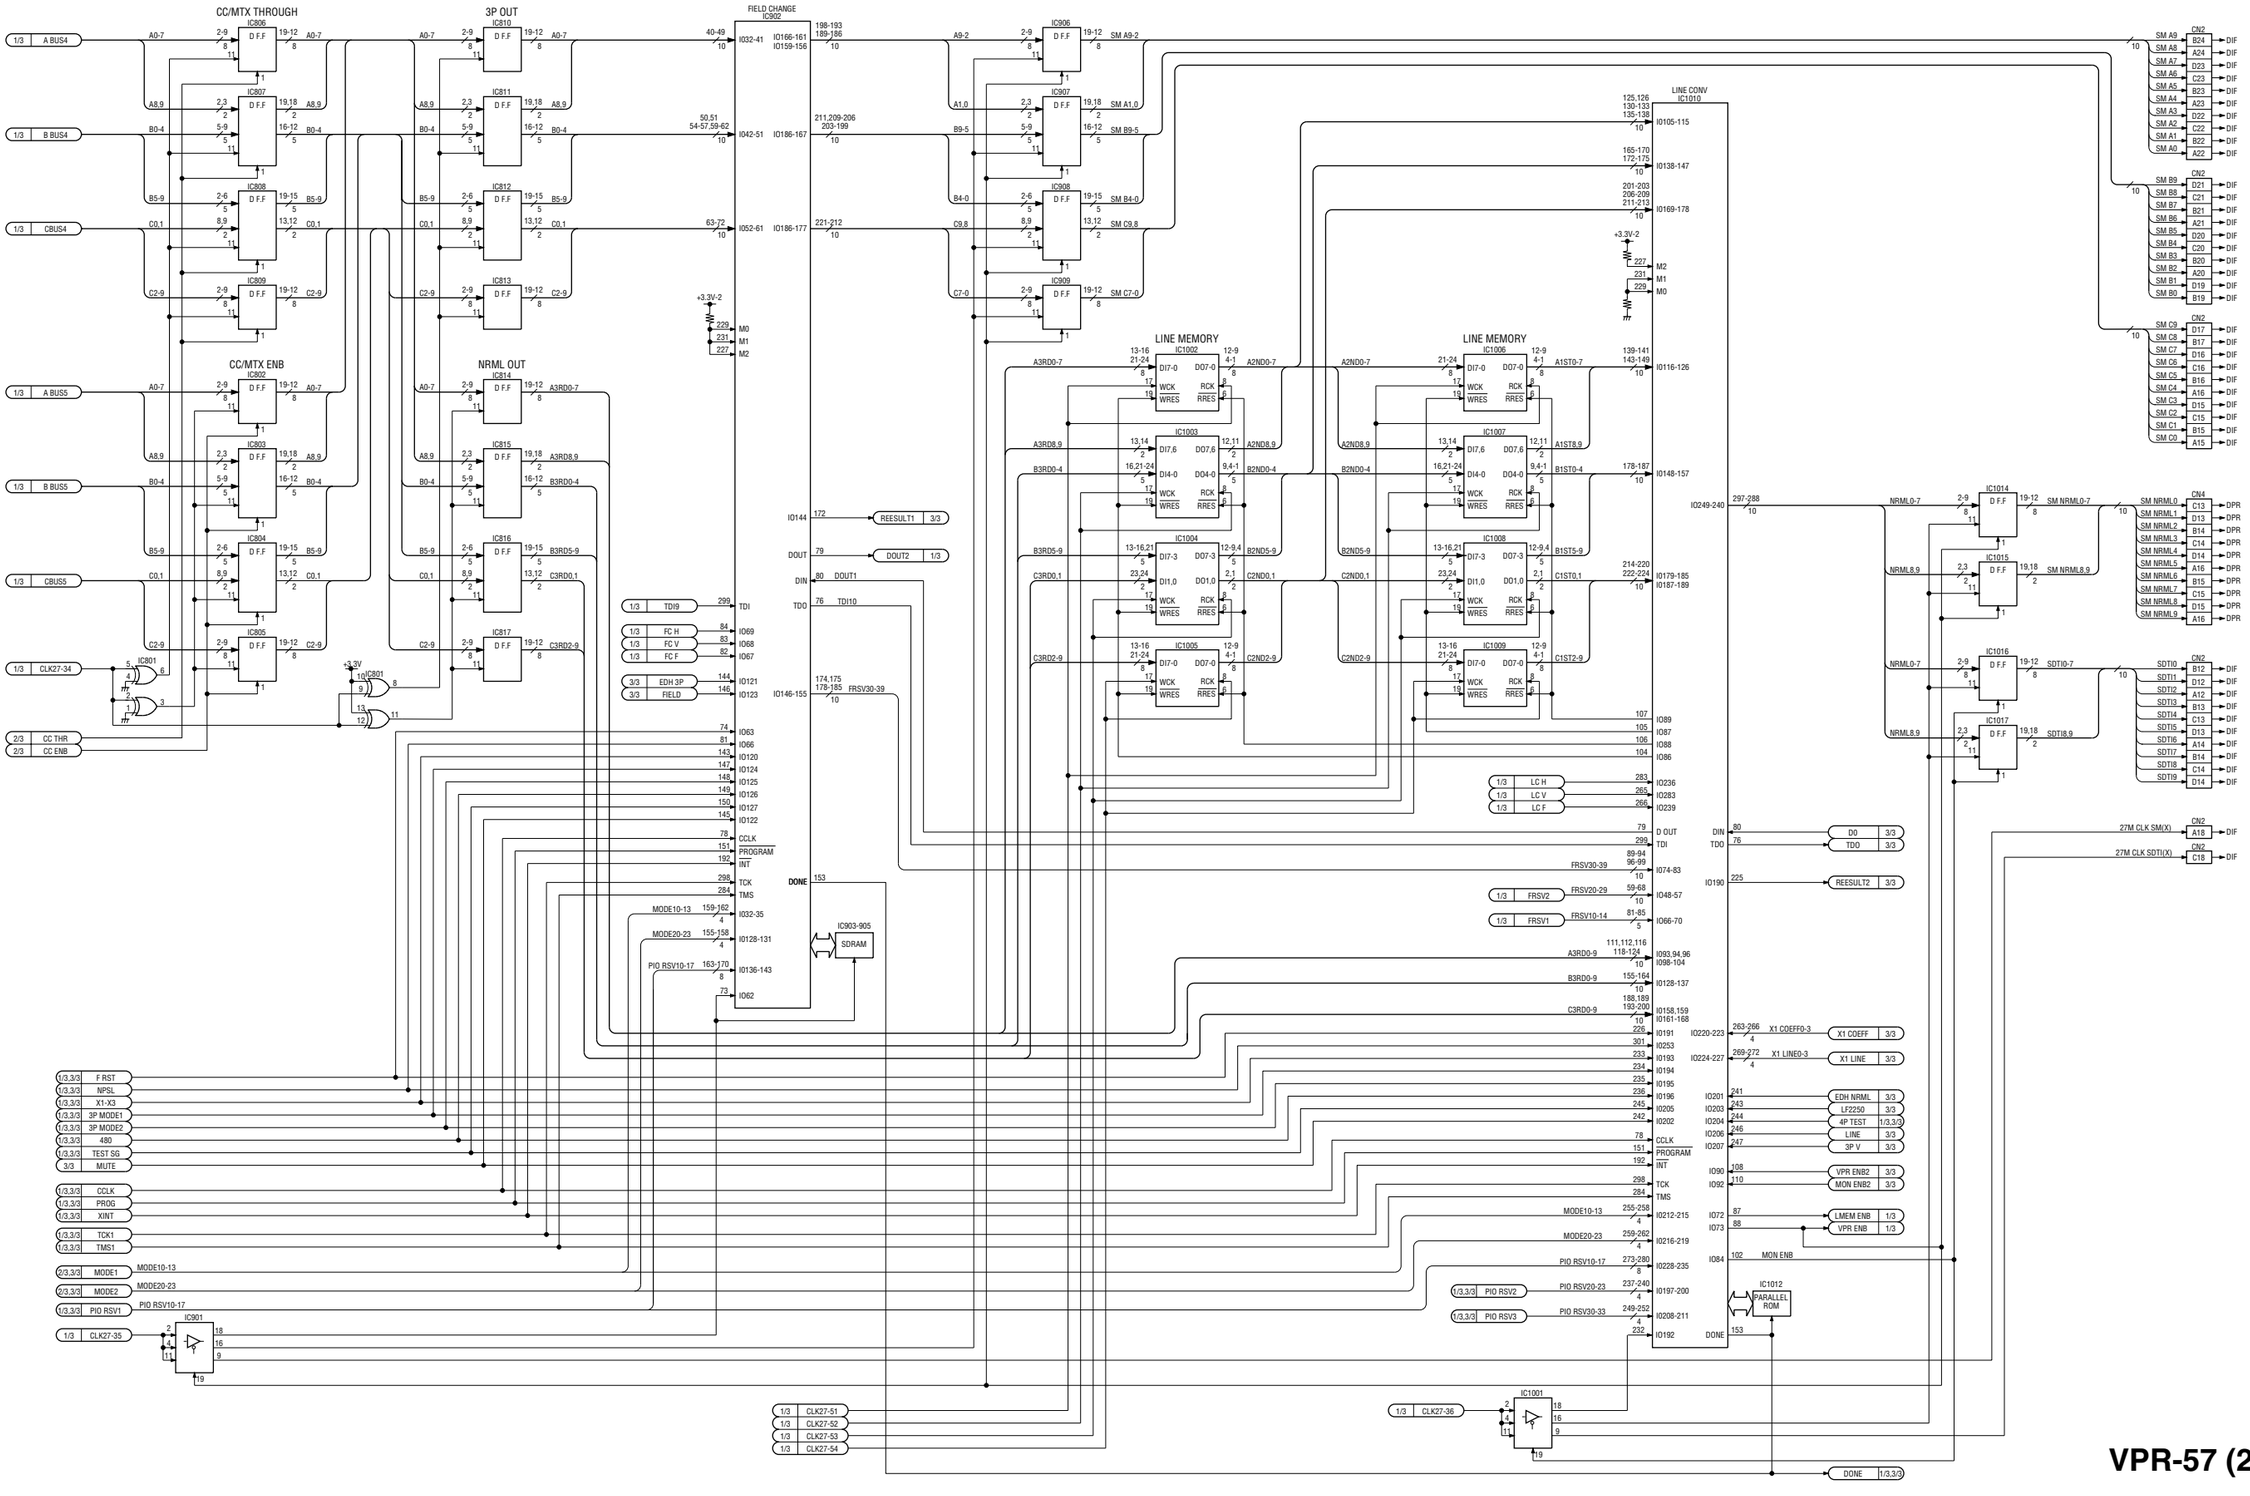

VPR-57 (2/3)

BKP-9330 (SY) : S/N 10001 and Higher

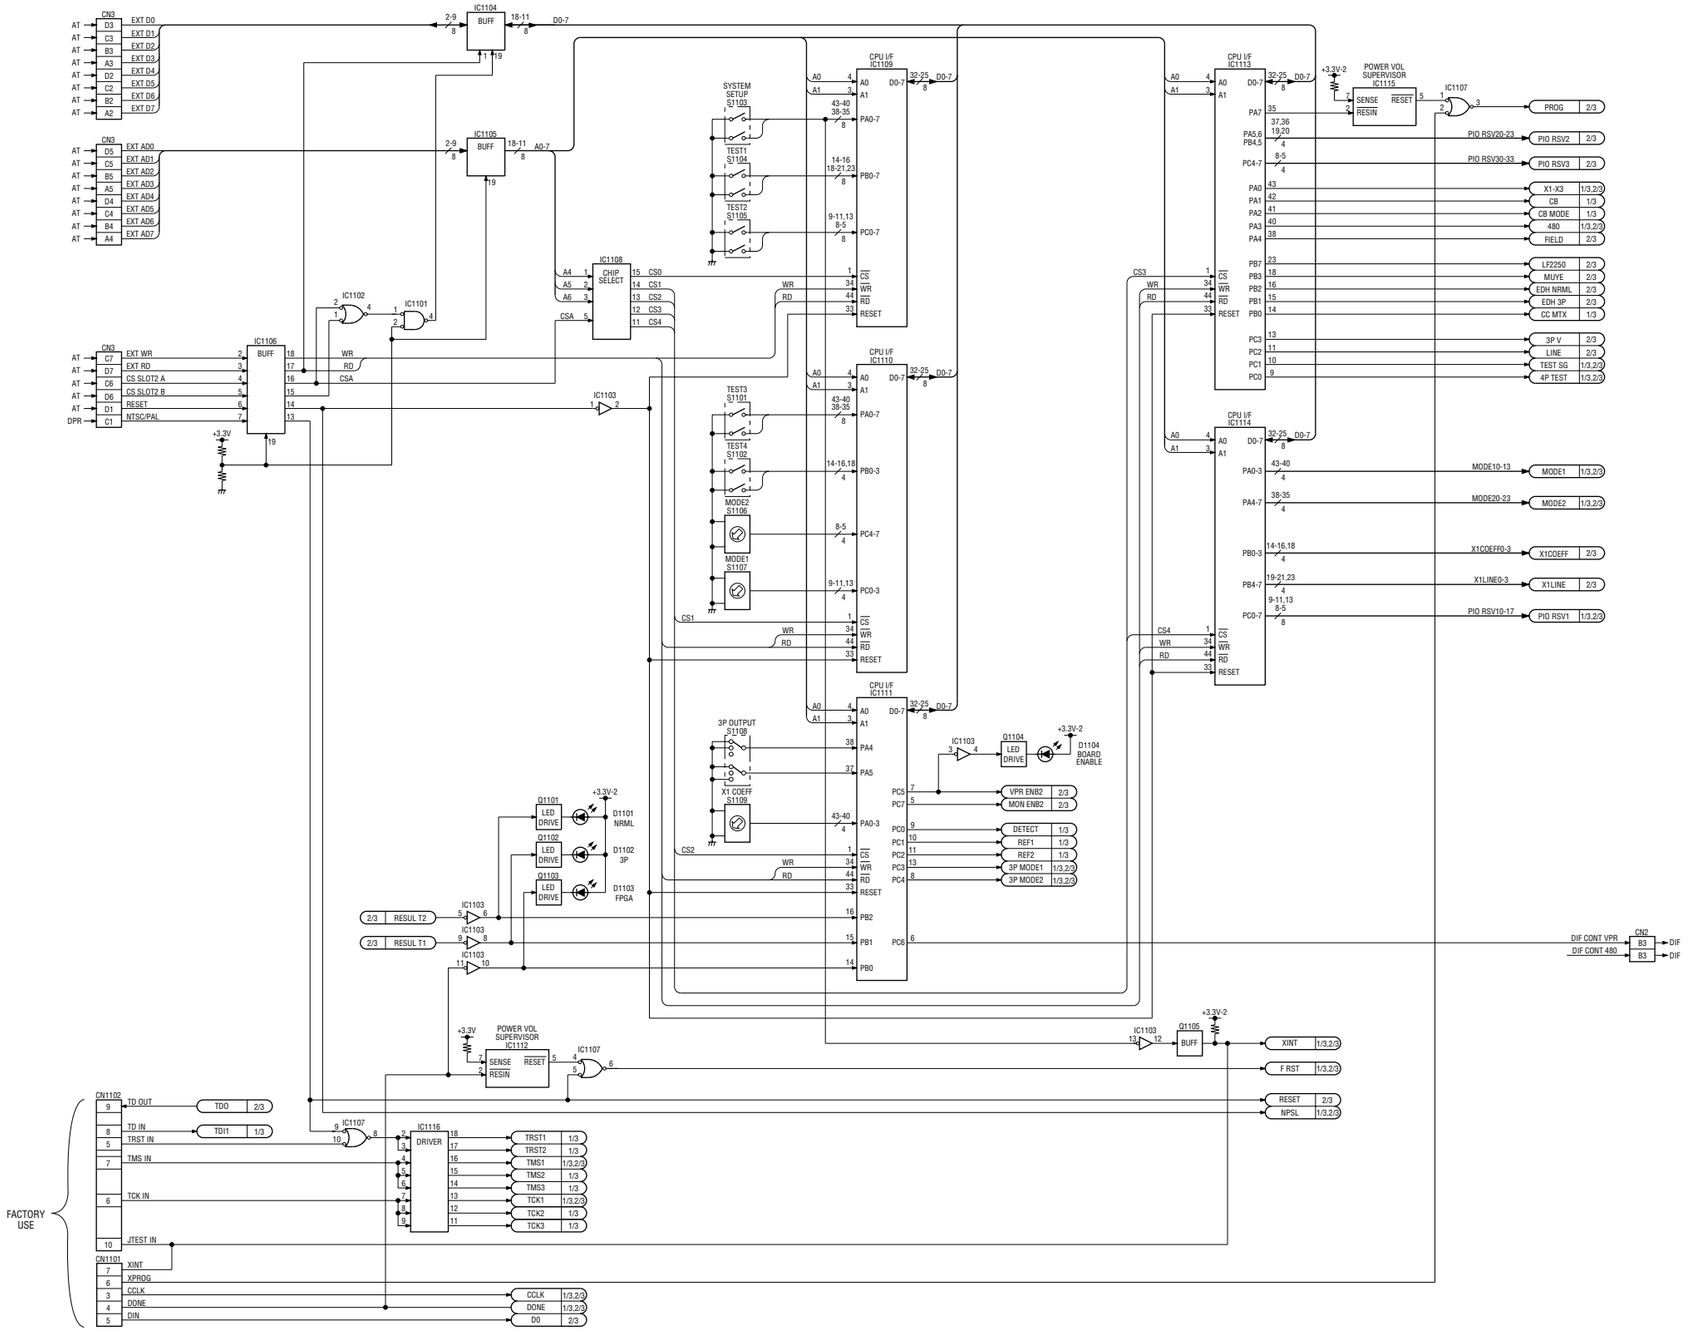

Section 4
Schematic Diagrams

Index

Board Name	Function	Page
AT-122 (CCU-900/900P)	Sytem Control, Audio Process	4-38
CN-1617 (CCU-900/900P)	Connector	4-56
CN-1618 (CCU-900/900P)	Connector	4-58
CN-1619 (CCU-900/900P)	Connector	4-58
CN-1635 (CCU-900/900P)	Connector	4-58
CN-1636 (CCU-900/900P)	Connector	4-58
CN-1637 (CCU-900/900P)	Connector	4-58
CN-1638 (CCU-900/900P)	Connector	4-59
CN-1925 (CCU-900/900P)	Connector	4-59
DIF-38 (BKP-9330)	Super Motion Output	4-64
DPR-69 (CCU-900/900P)	SG, Video Process	4-2
IF-730 (CCU-900/900P)	Interface	4-32
MB-647 (CCU-900/900P)	Motherboard	4-52
SDI-31 (CCU-900/900P)	Digital Interface	4-25
VPR-57 (BKP-9330)	Super Motion Video Process	4-72
Frame Wiring (CCU-900/900P)	–	4-61

4-1

DPR-69 (1/15)

CCU-900 (UC) : S/N 10001 and Higher
CCU-900 (J) : S/N 30001 and Higher
CCU-900P (CE) : S/N 40001 and Higher

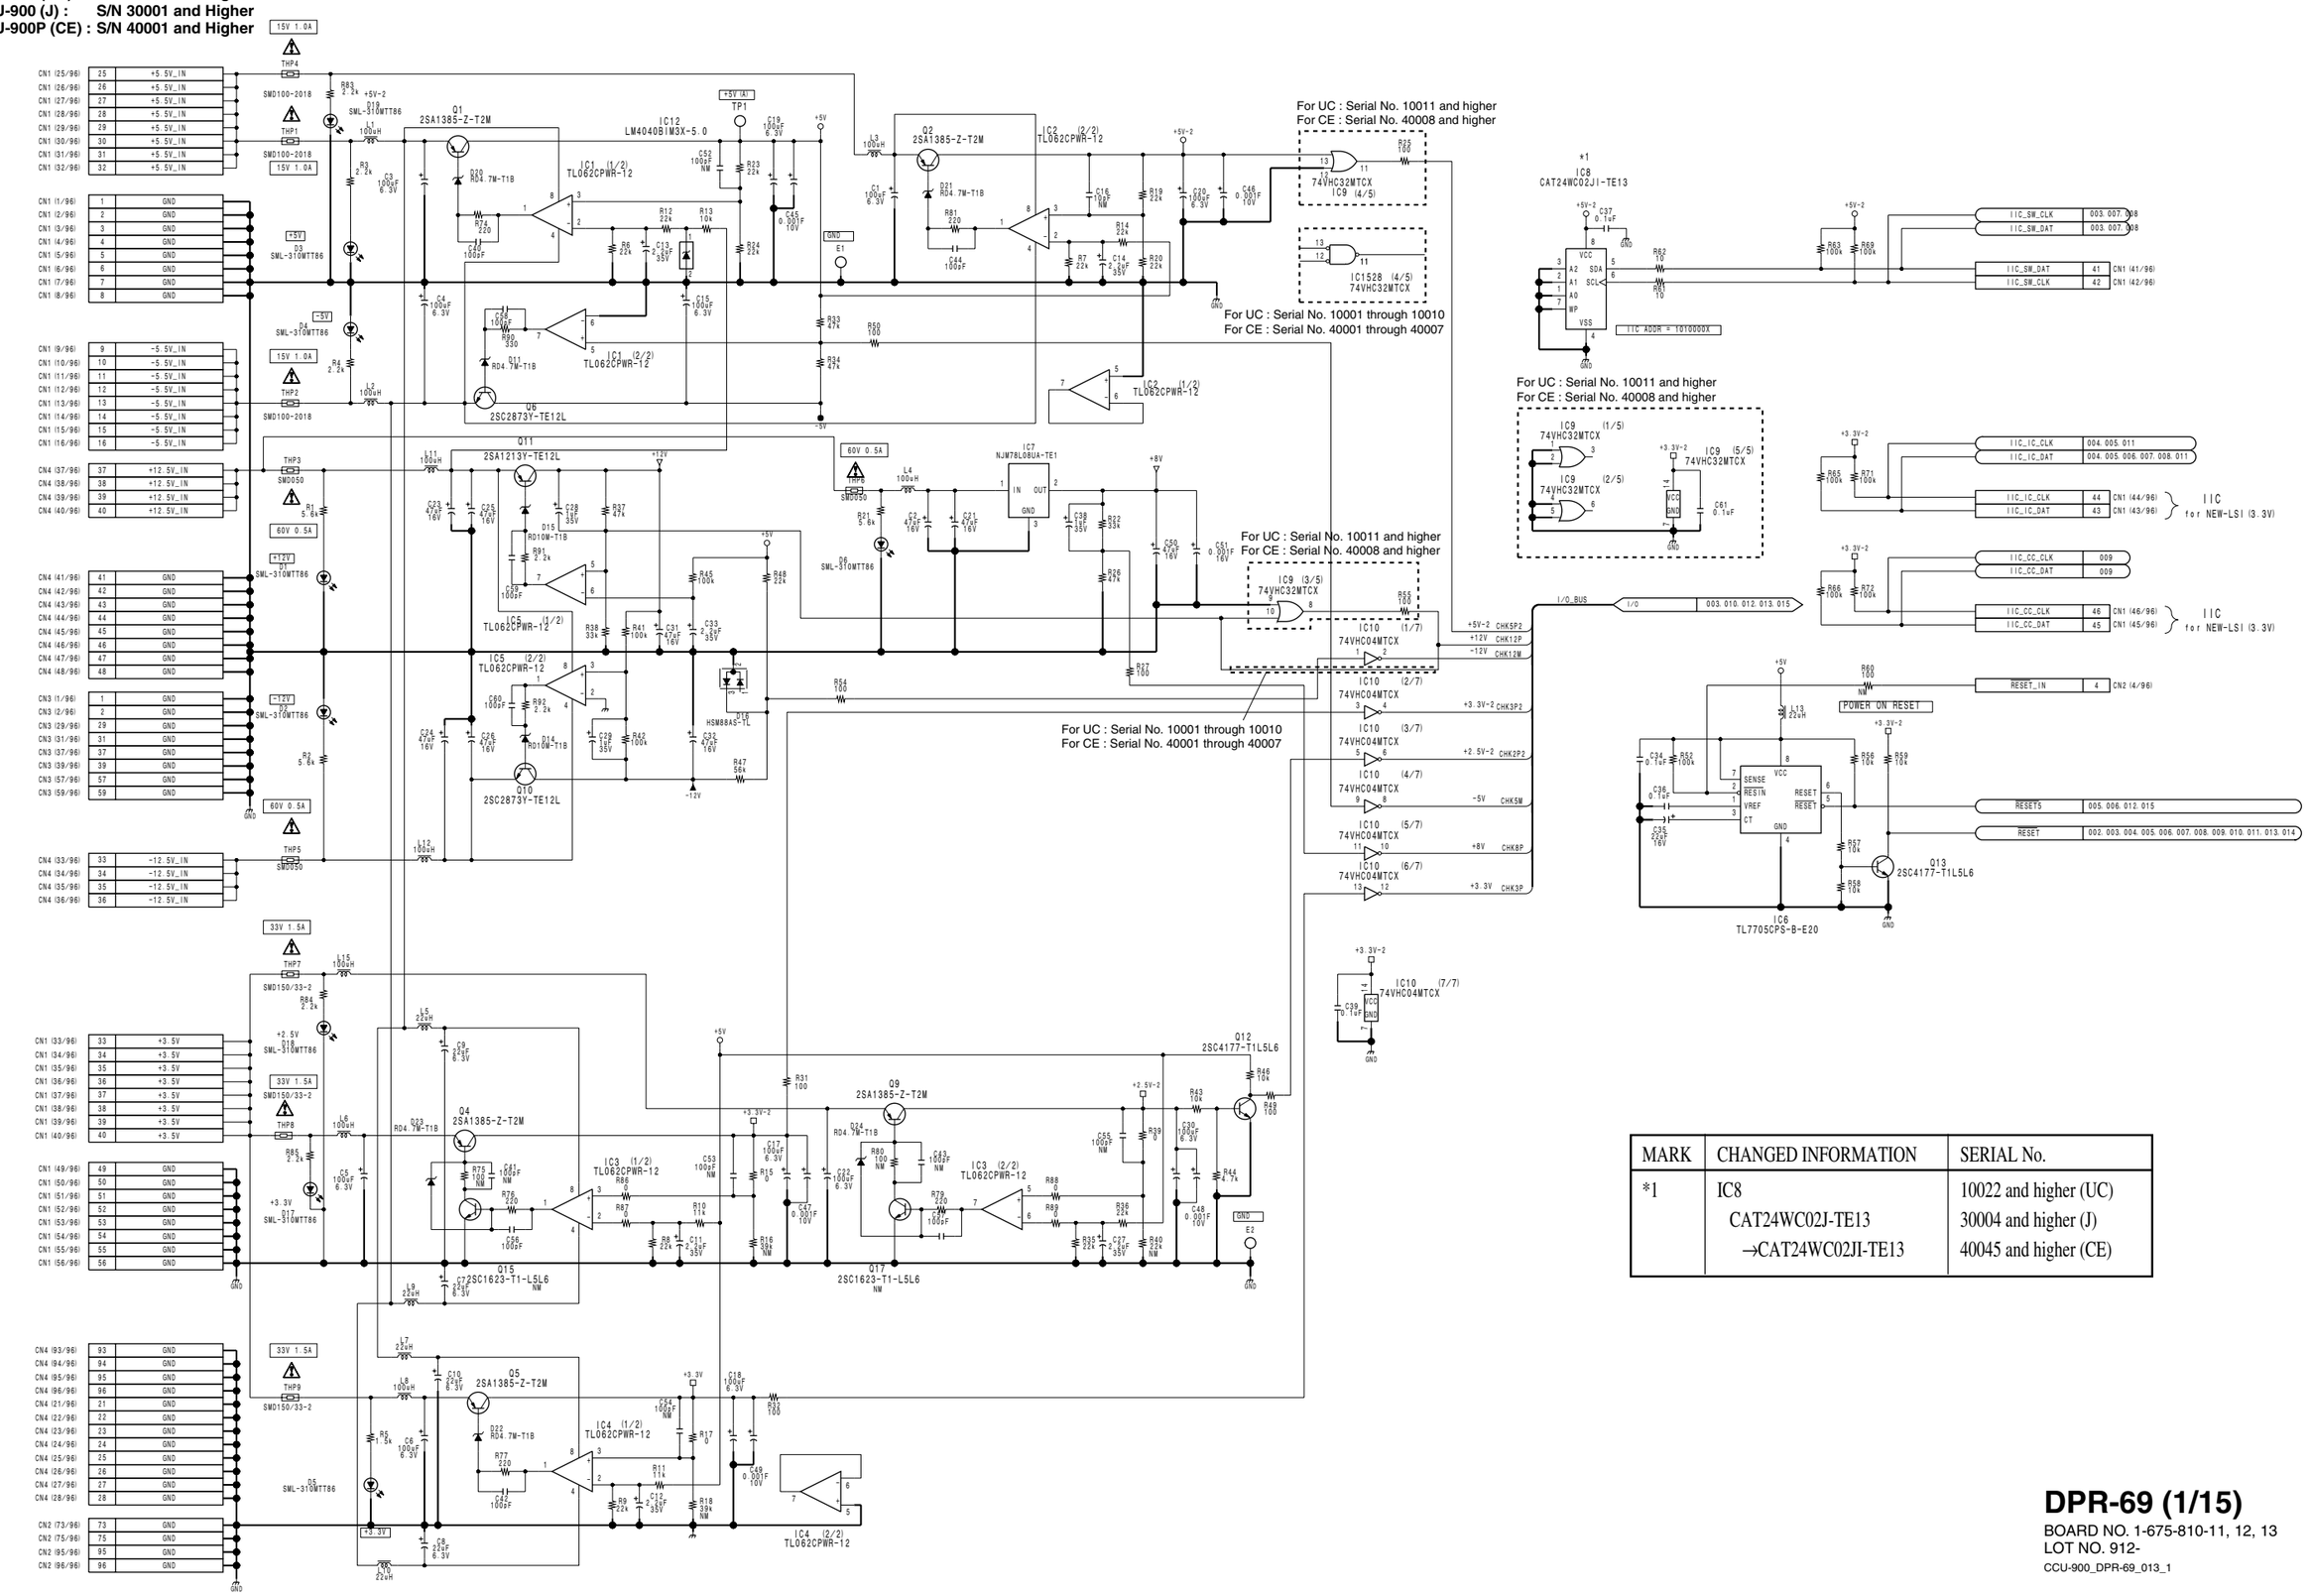

MARK	CHANGED INFORMATION	SERIAL No.
*1	IC8 CAT24WC02J-TE13 →CAT24WC02JI-TE13	10022 and higher (UC) 30004 and higher (J) 40045 and higher (CE)

DPR-69 (1/15)
BOARD NO. 1-675-810-11, 12, 13
LOT NO. 912-
CCU-900_DPR-69_013_1

DPR-69 (2/15)

CCU-900 (UC) : S/N 10001 and Higher
CCU-900 (J) : S/N 30001 and Higher
CCU-900P (CE) : S/N 40001 and Higher

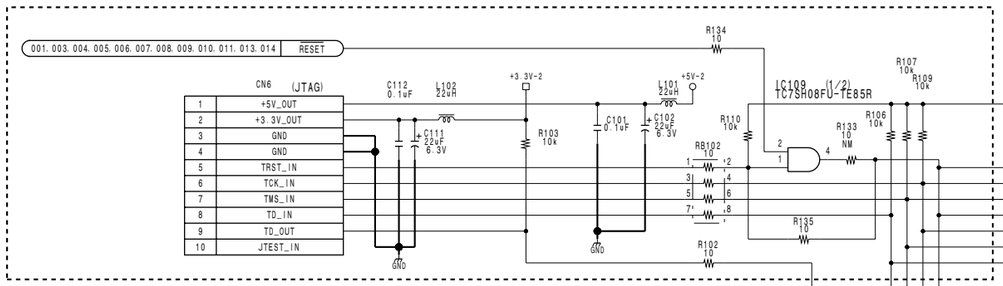

For UC : Serial No. 10001 through 10010
For CE : Serial No. 40001 through 40007

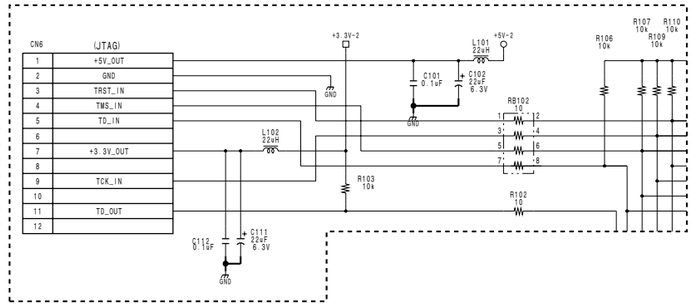

For UC : Serial No. 10011 and higher
For CE : Serial No. 40008 and higher

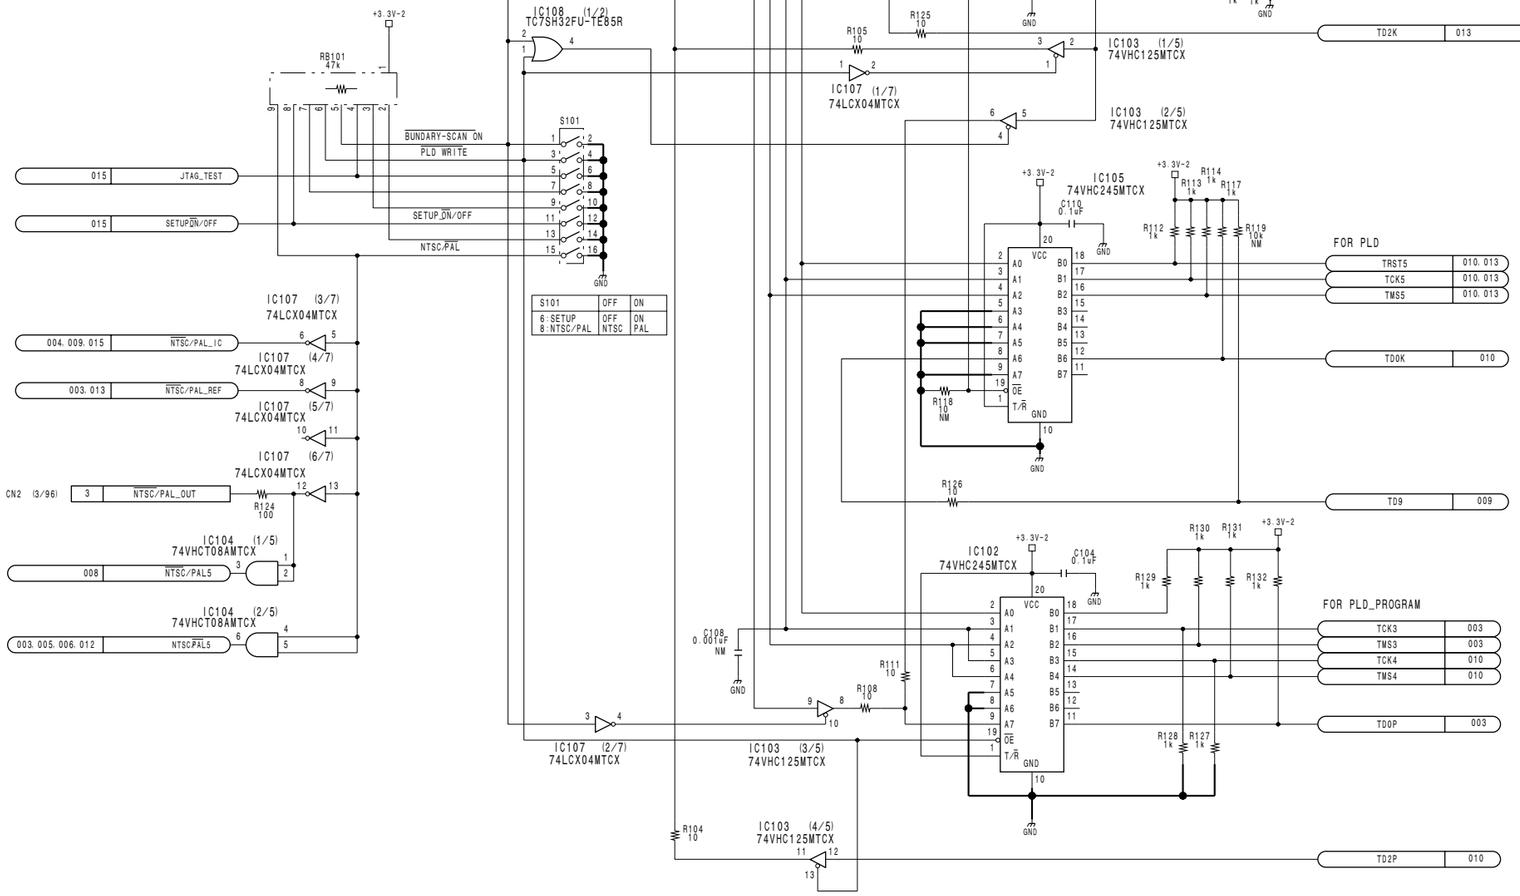

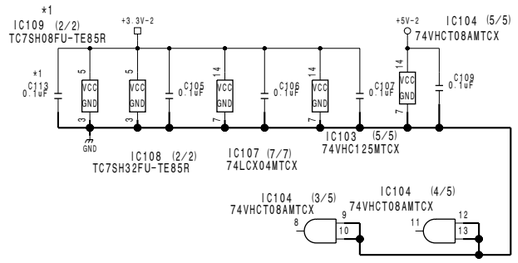

MARK	CHANGED INFORMATION		SERIAL No.
*1	C113	ADDED	10011 and higher (UC)
	IC109	ADDED	40008 and higher (CE)

DPR-69 (2/15)
BOARD NO. 1-675-810-11, 12, 13
LOT NO. 912-
CCU-900_DPR-69_013_2

DPR-69 (3/15)

CCU-900 (UC) : S/N 10001 and Higher
CCU-900 (J) : S/N 30001 and Higher
CCU-900P (CE) : S/N 40001 and Higher

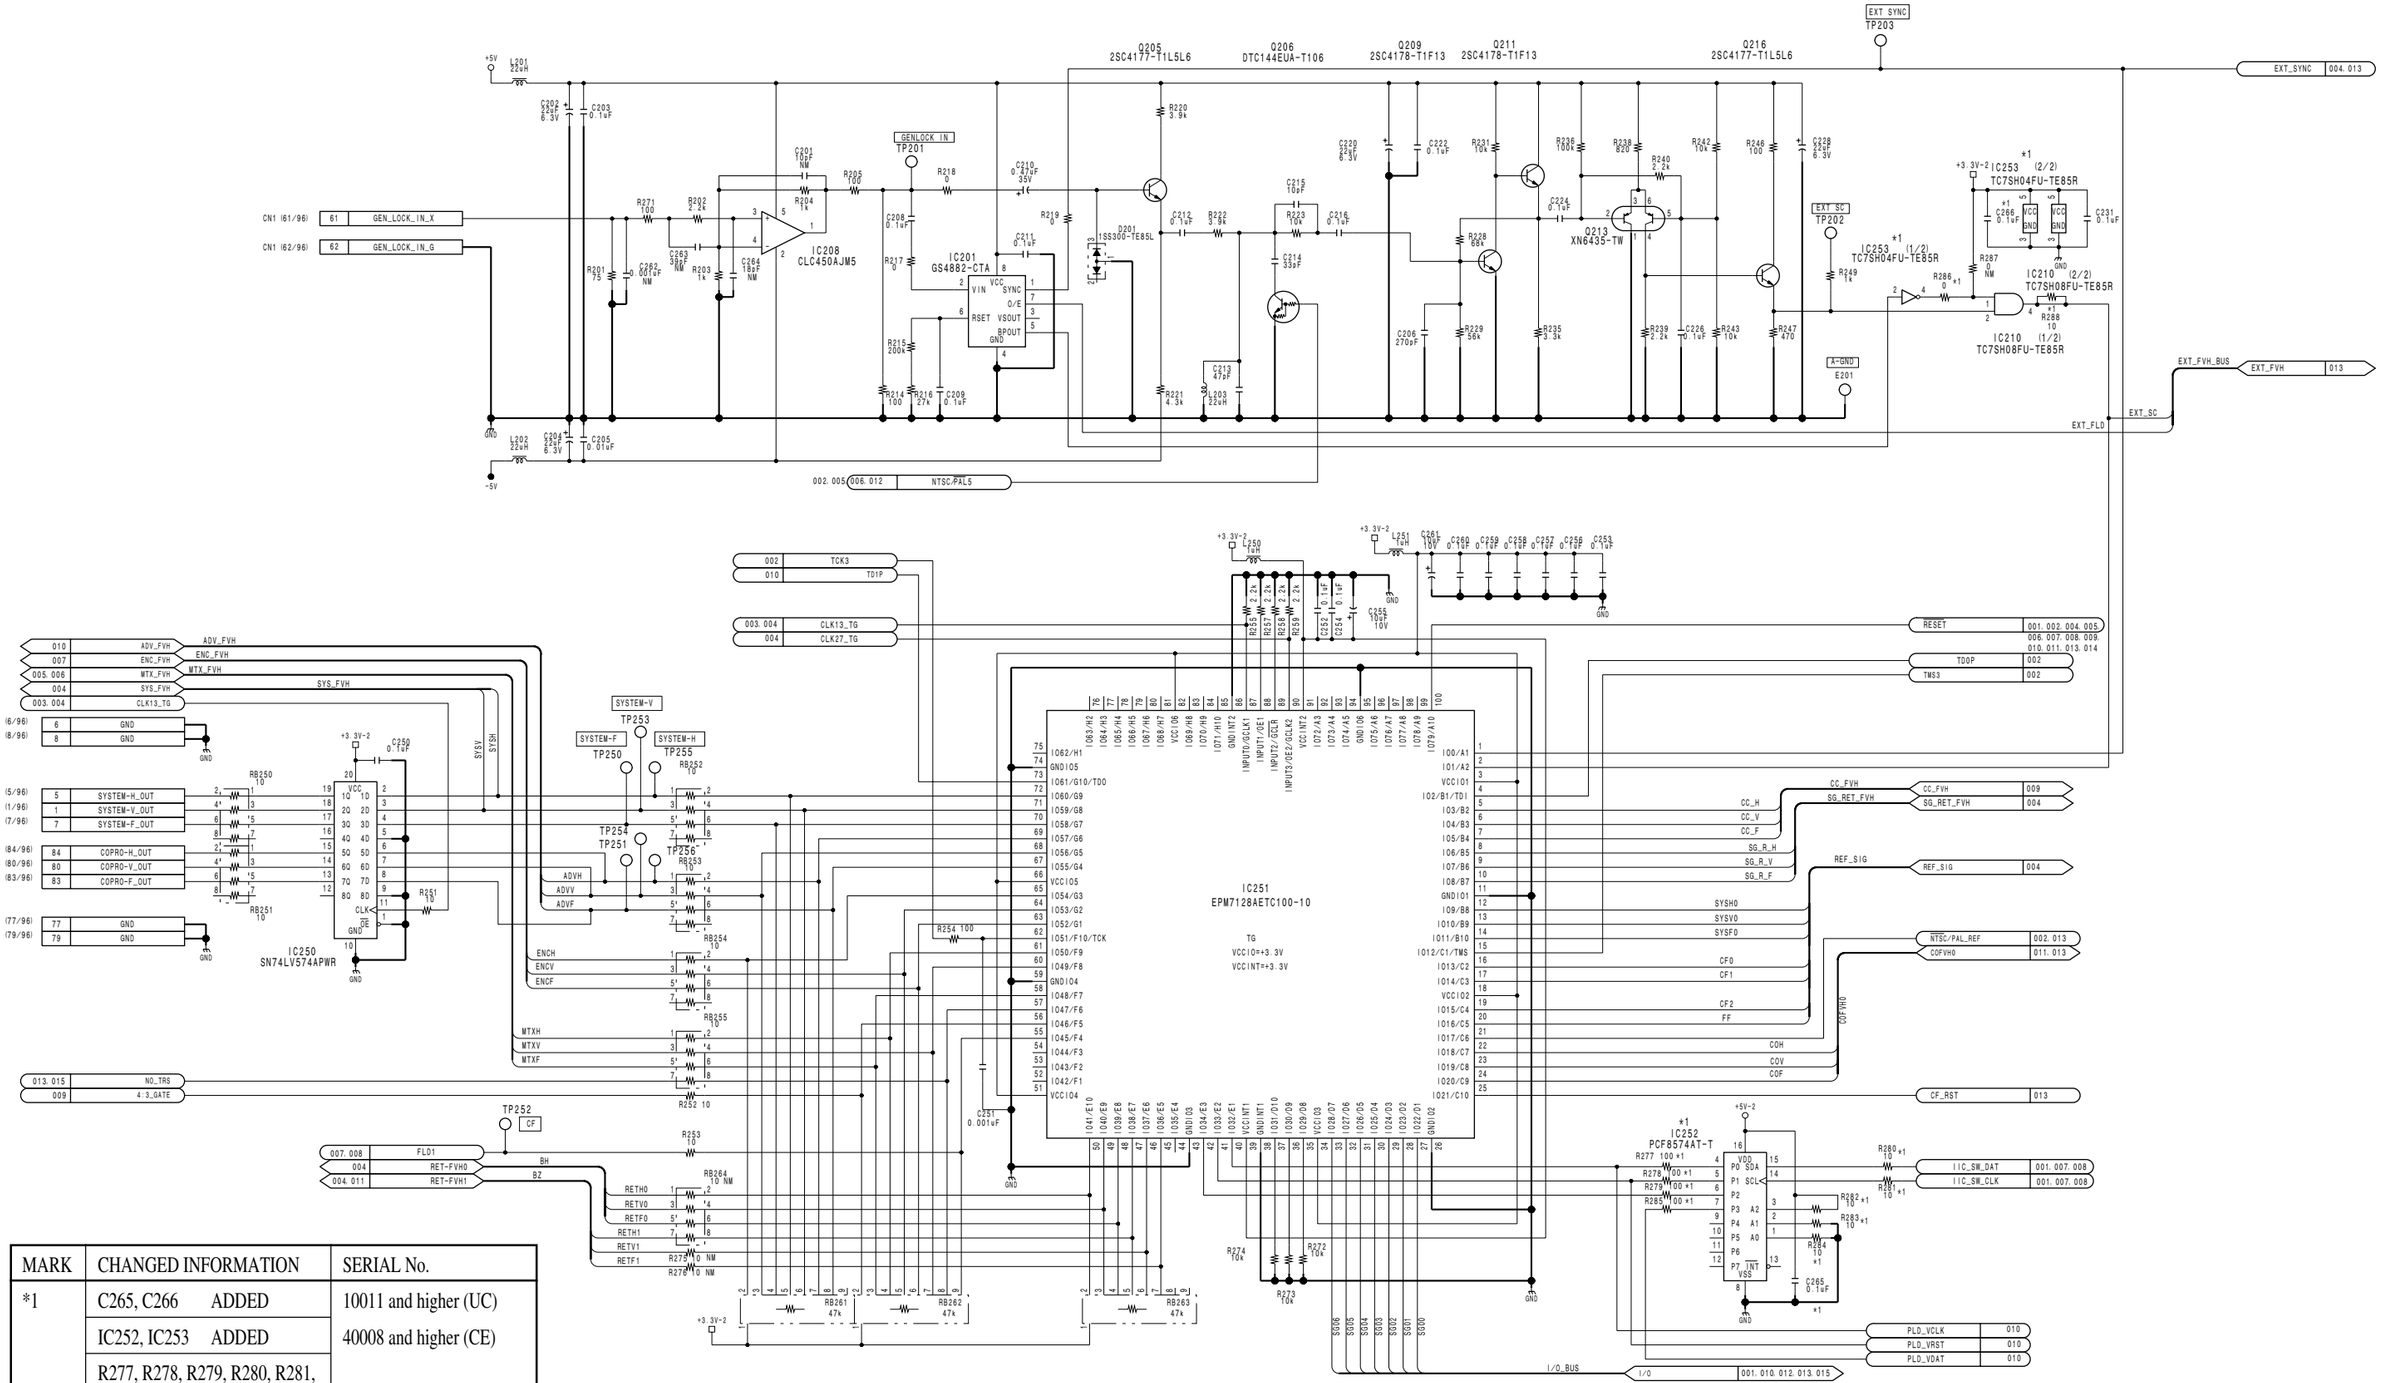

MARK	CHANGED INFORMATION	SERIAL No.
*1	C265, C266 ADDED	10011 and higher (UC)
	IC252, IC253 ADDED	40008 and higher (CE)
	R277, R278, R279, R280, R281, R282, R283, R284, R285, R286, R288 ADDED	

DPR-69 (3/15)
BOARD NO. 1-675-810-11, 12, 13
LOT NO. 912-
CCU-900_DPR-69_013_3

DPR-69 (4/15)

CCU-900 (UC) : S/N 10001 and Higher
CCU-900 (J) : S/N 30001 and Higher
CCU-900P (CE) : S/N 40001 and Higher

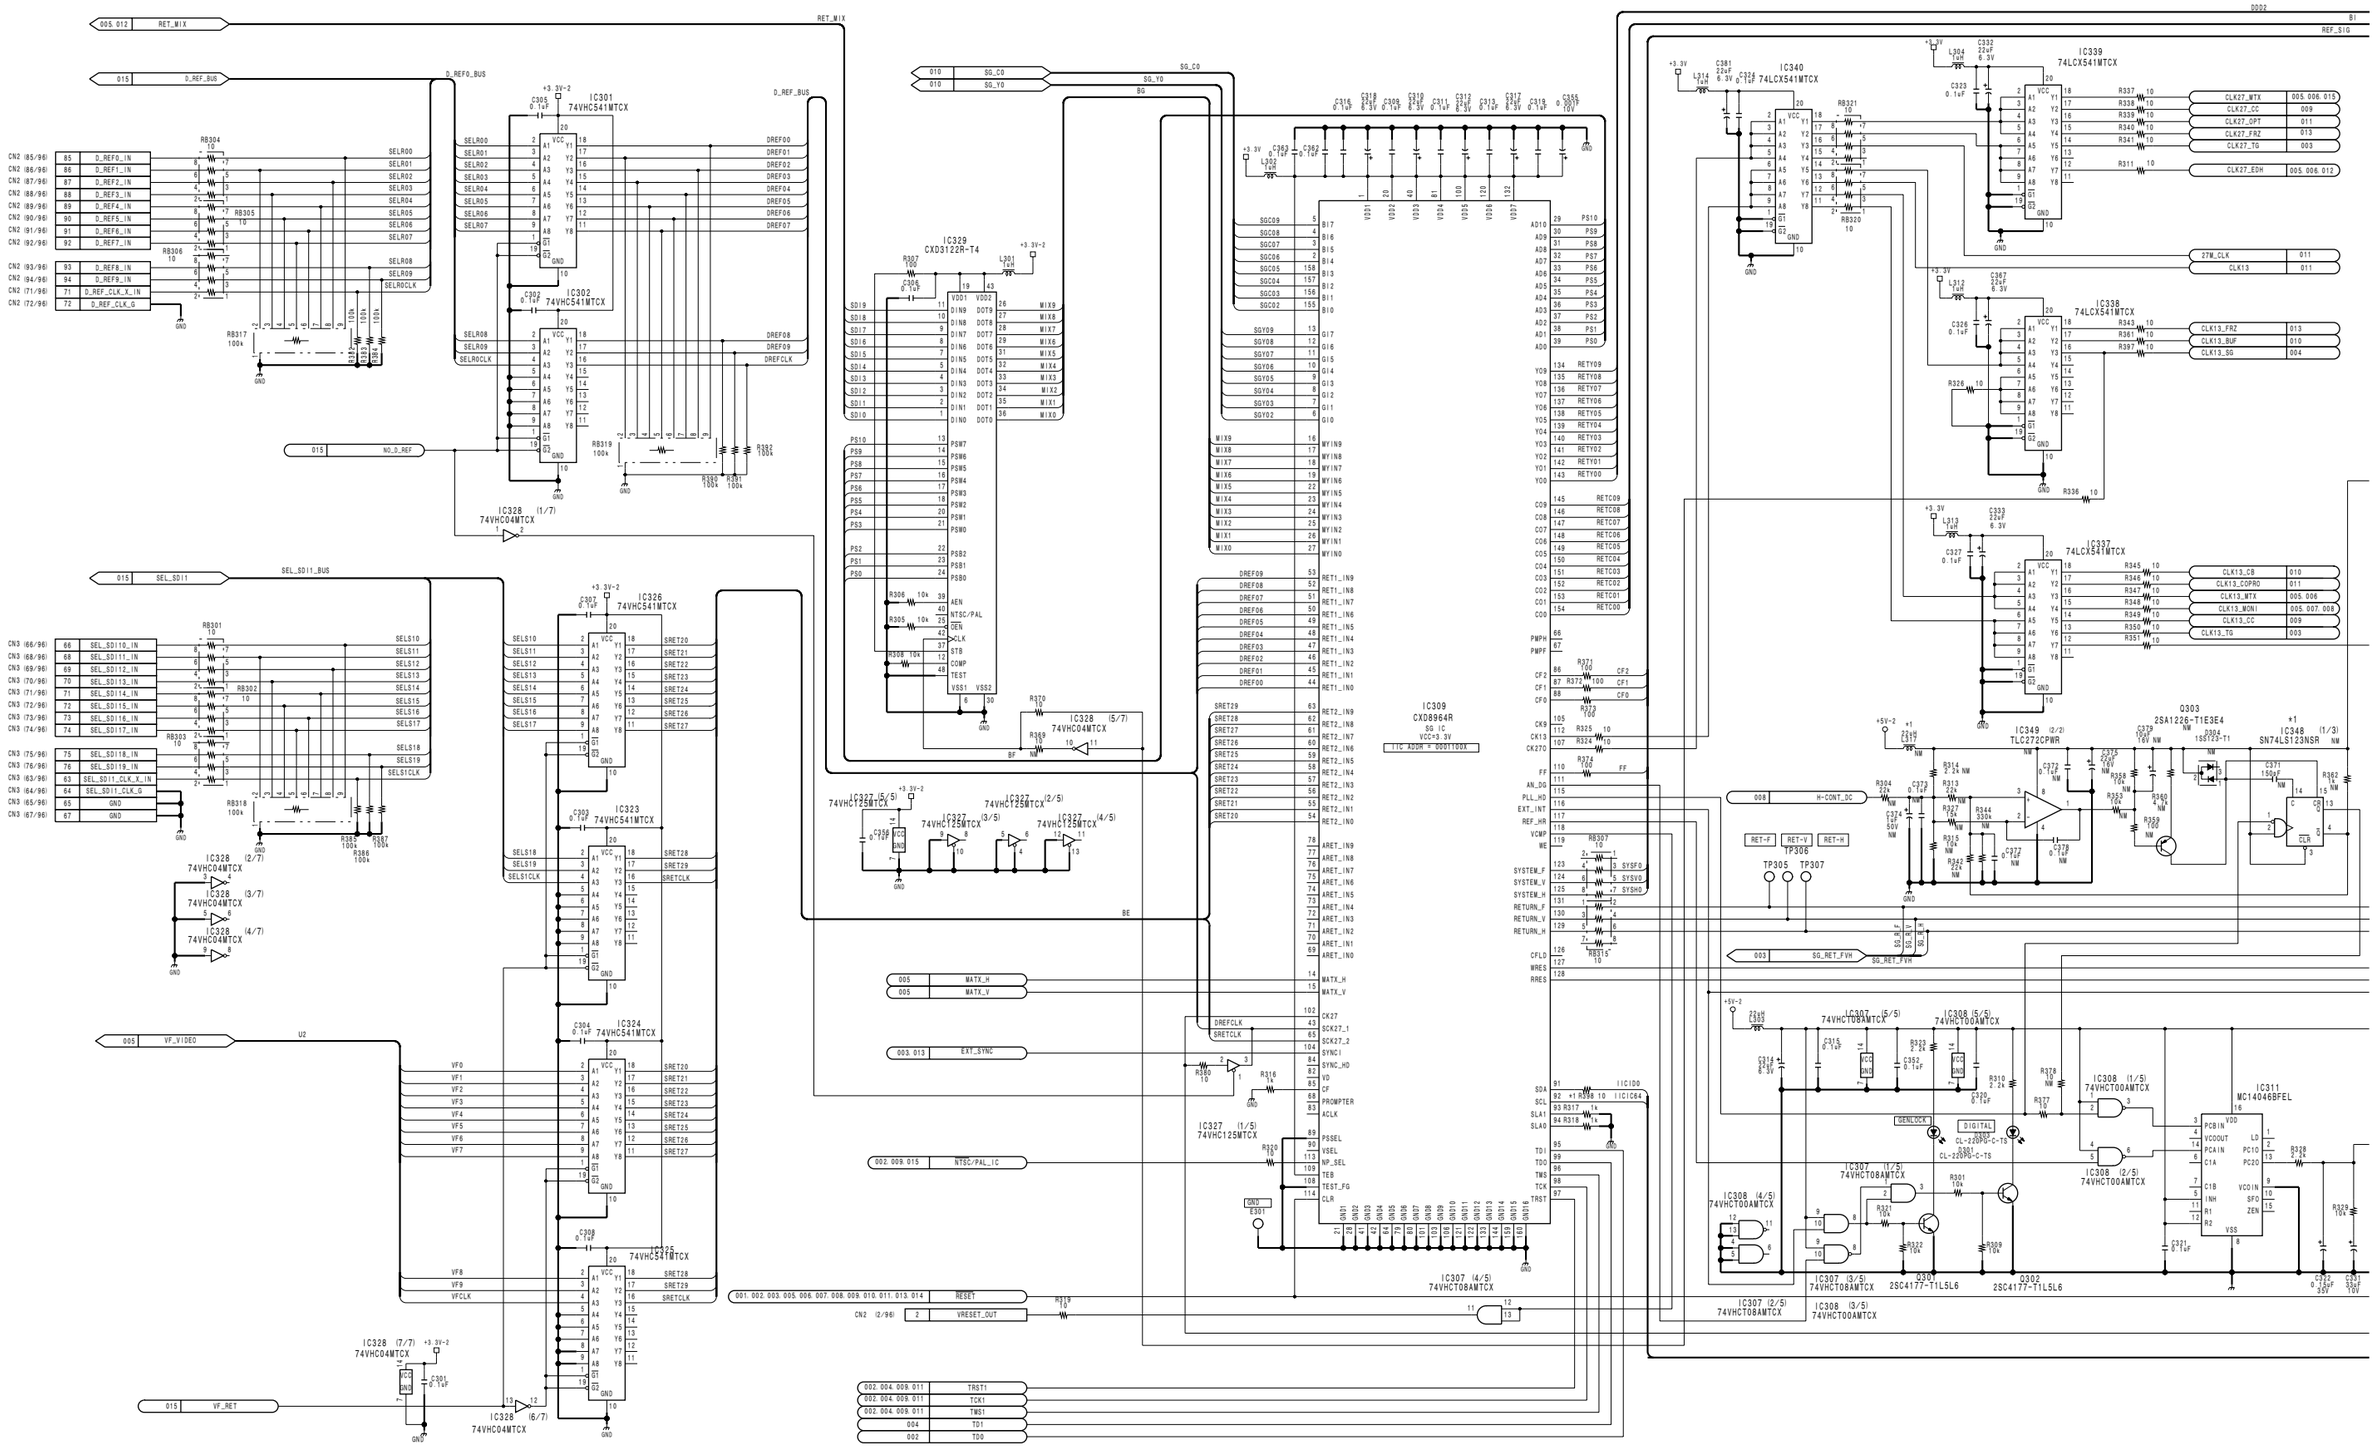

4-6

DPR-69 (4/15)

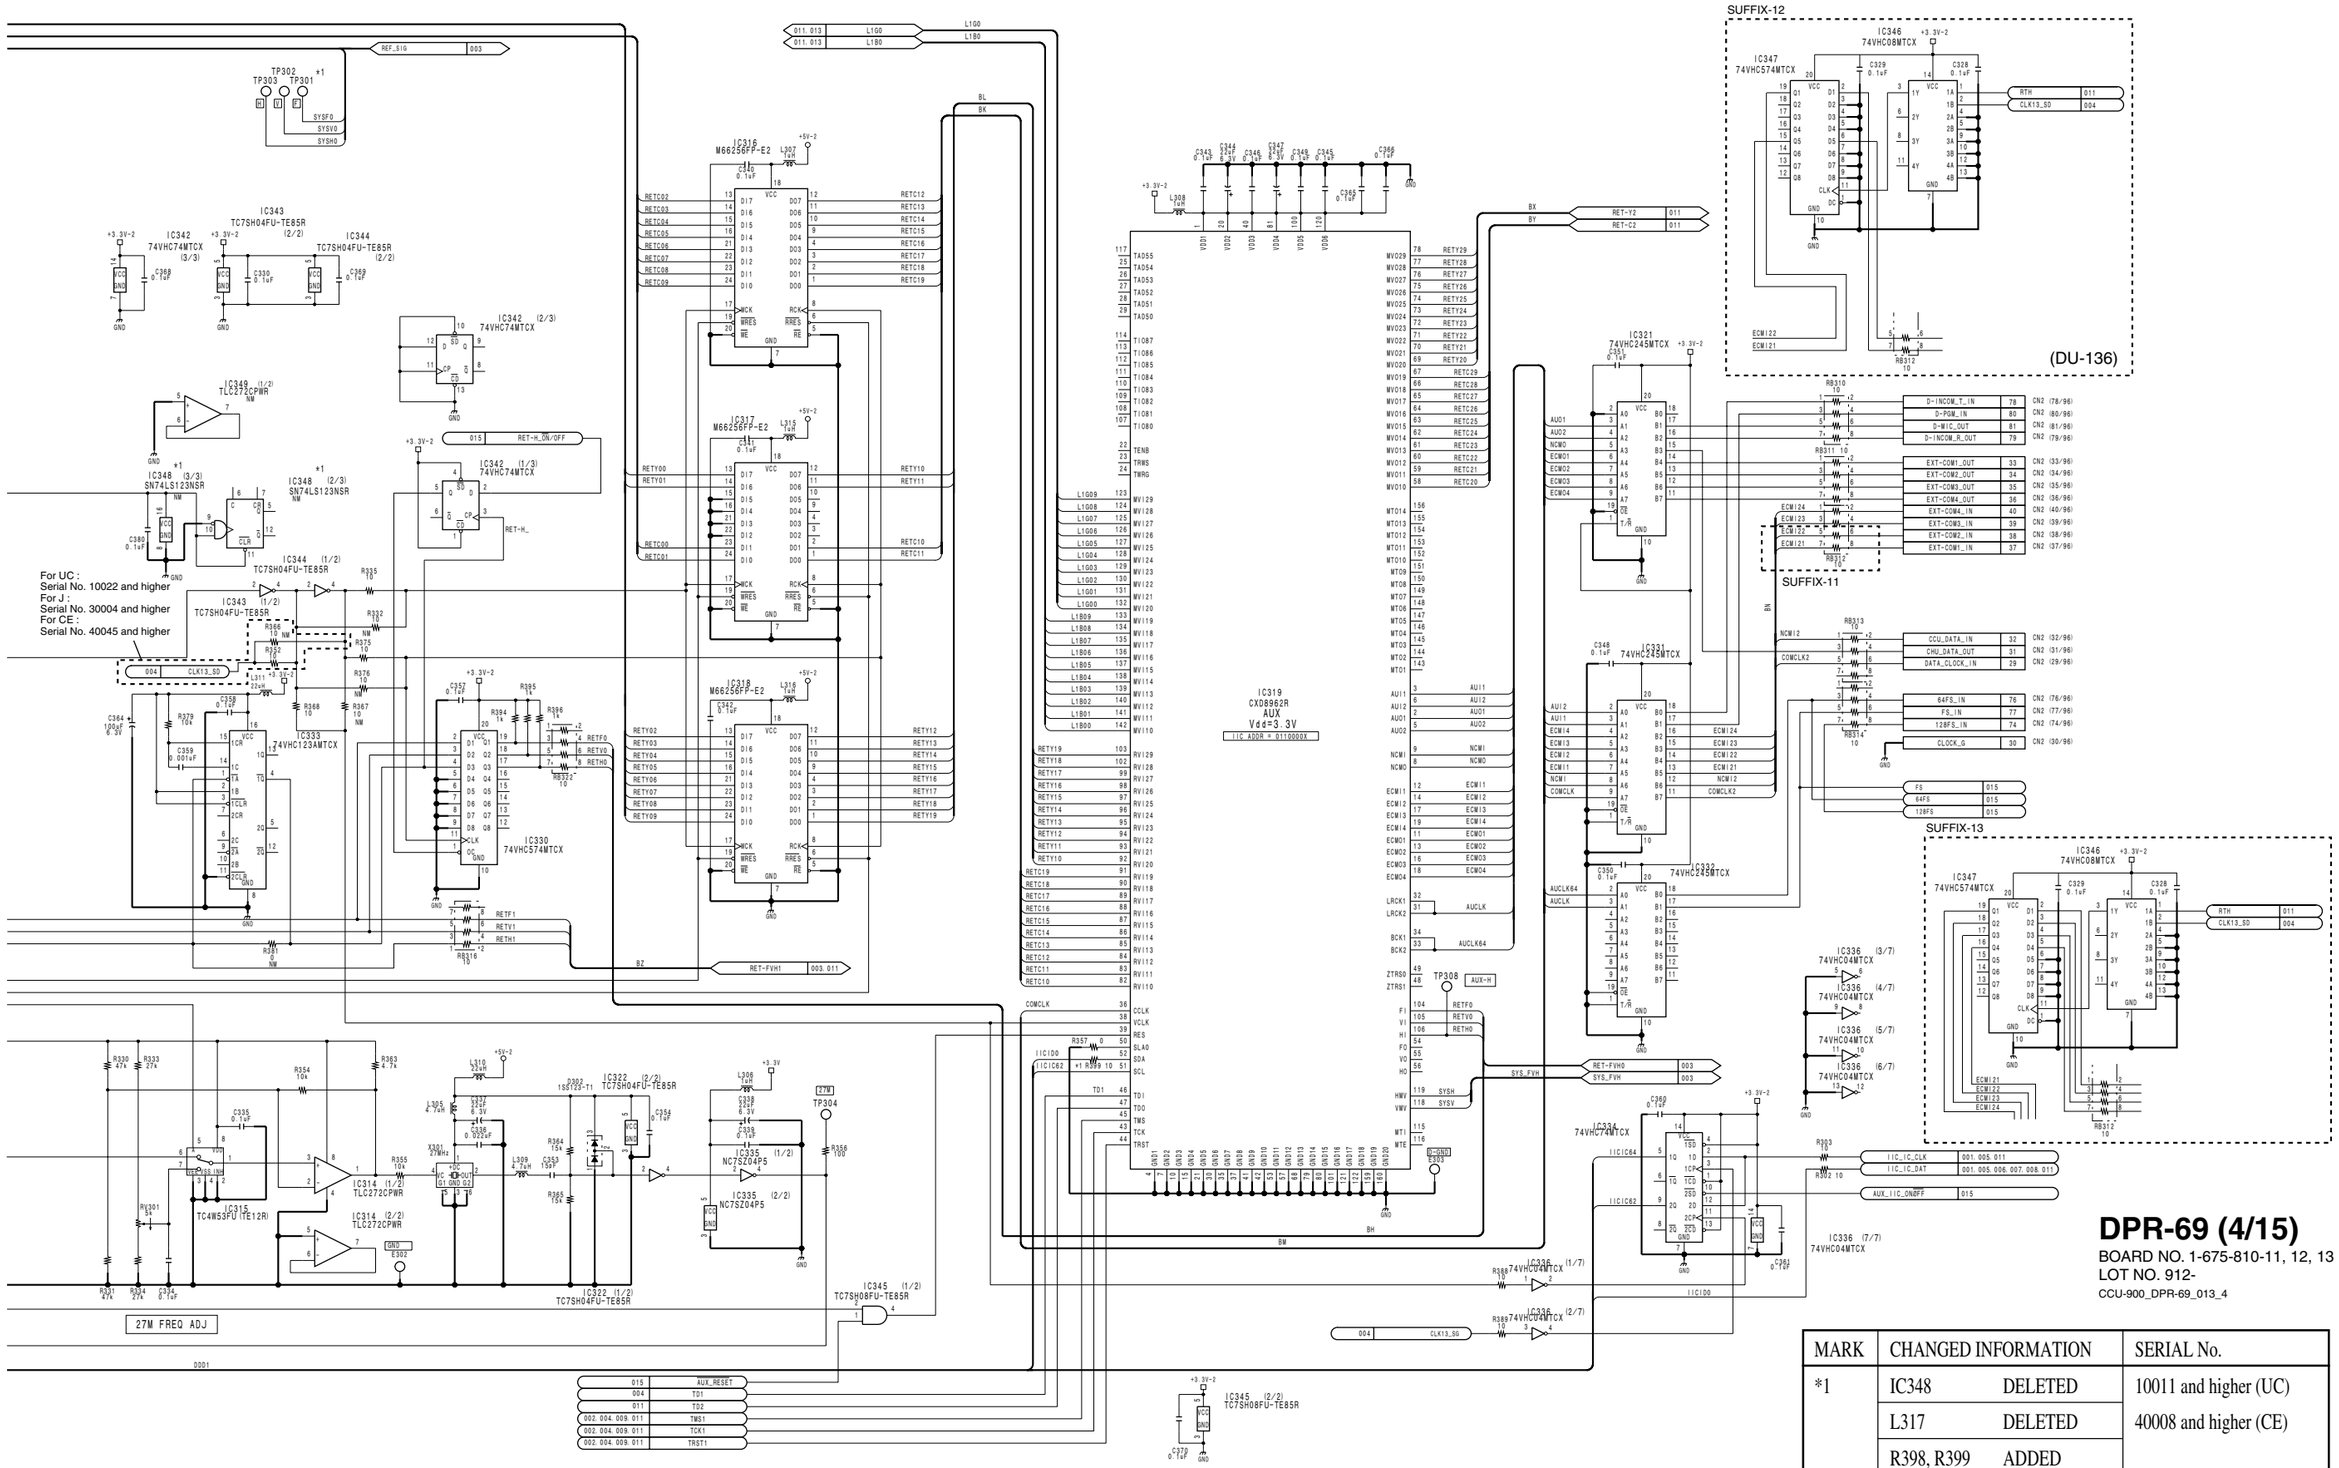

DPR-69 (4/15)

BOARD NO. 1-675-810-11, 12, 13
LOT NO. 912-
CCU-900_DPR-69_013_4

MARK	CHANGED INFORMATION		SERIAL No.
*1	IC348	DELETED	10011 and higher (UC)
	L317	DELETED	40008 and higher (CE)
	R398, R399	ADDED	
	TP301	ADDED	

DPR-69 (5/15)

CCU-900 (UC) : S/N 10001 and Higher
CCU-900 (J) : S/N 30001 and Higher
CCU-900P (CE) : S/N 40001 and Higher

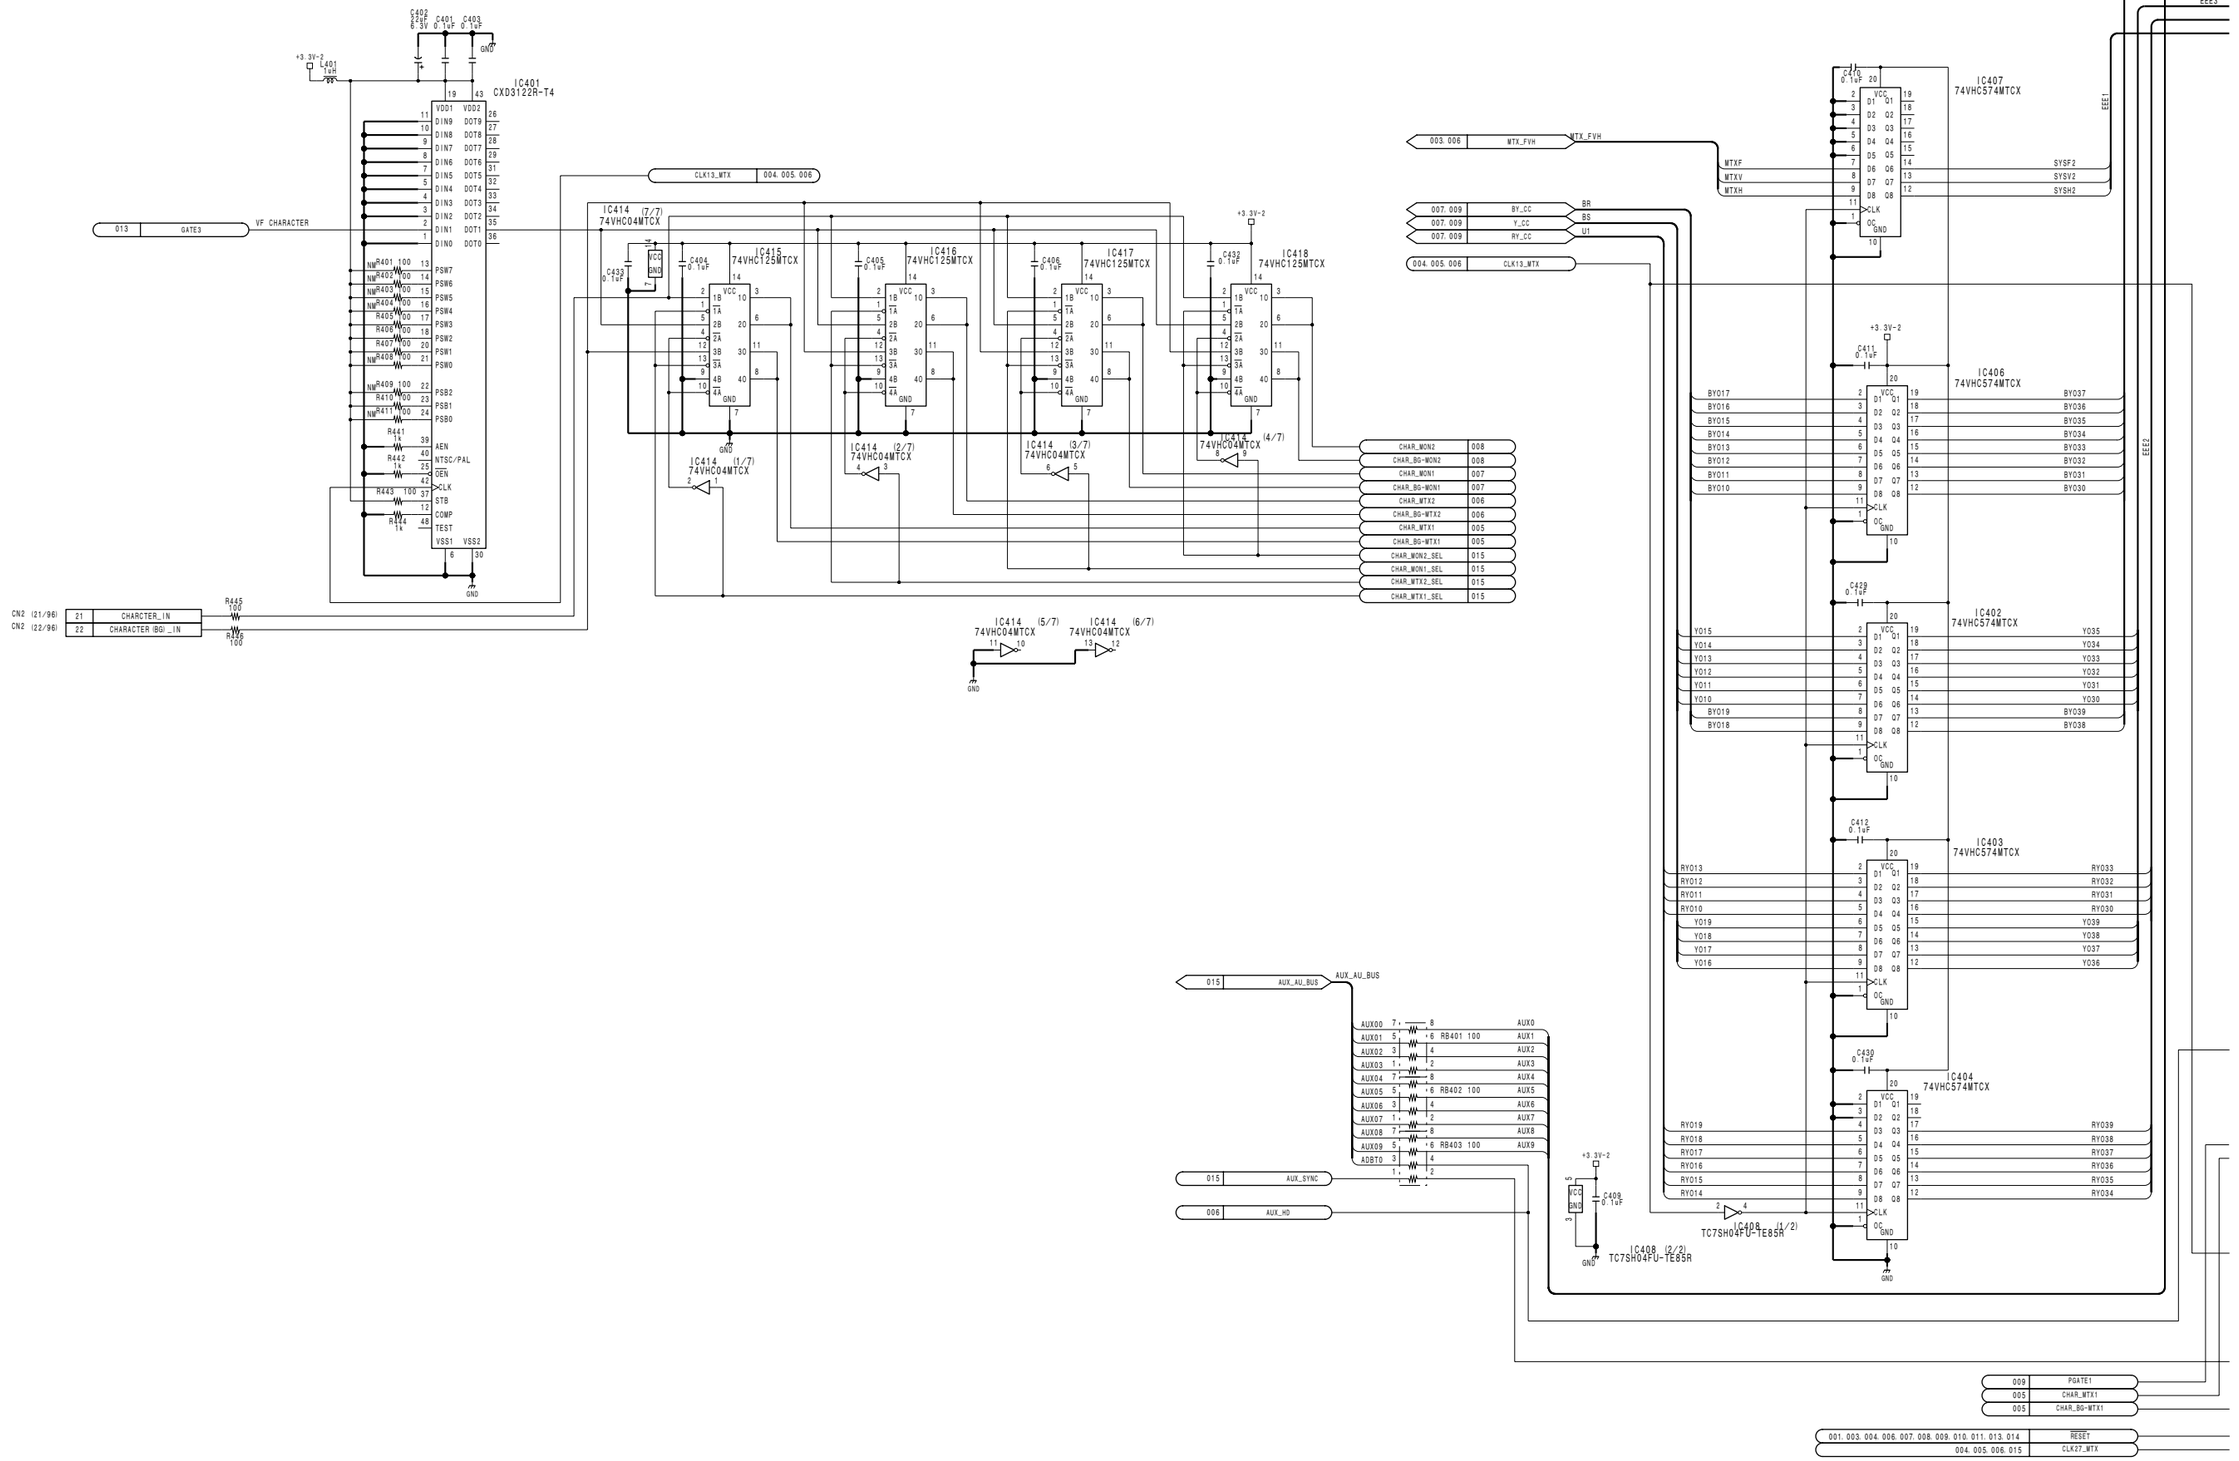

4-8

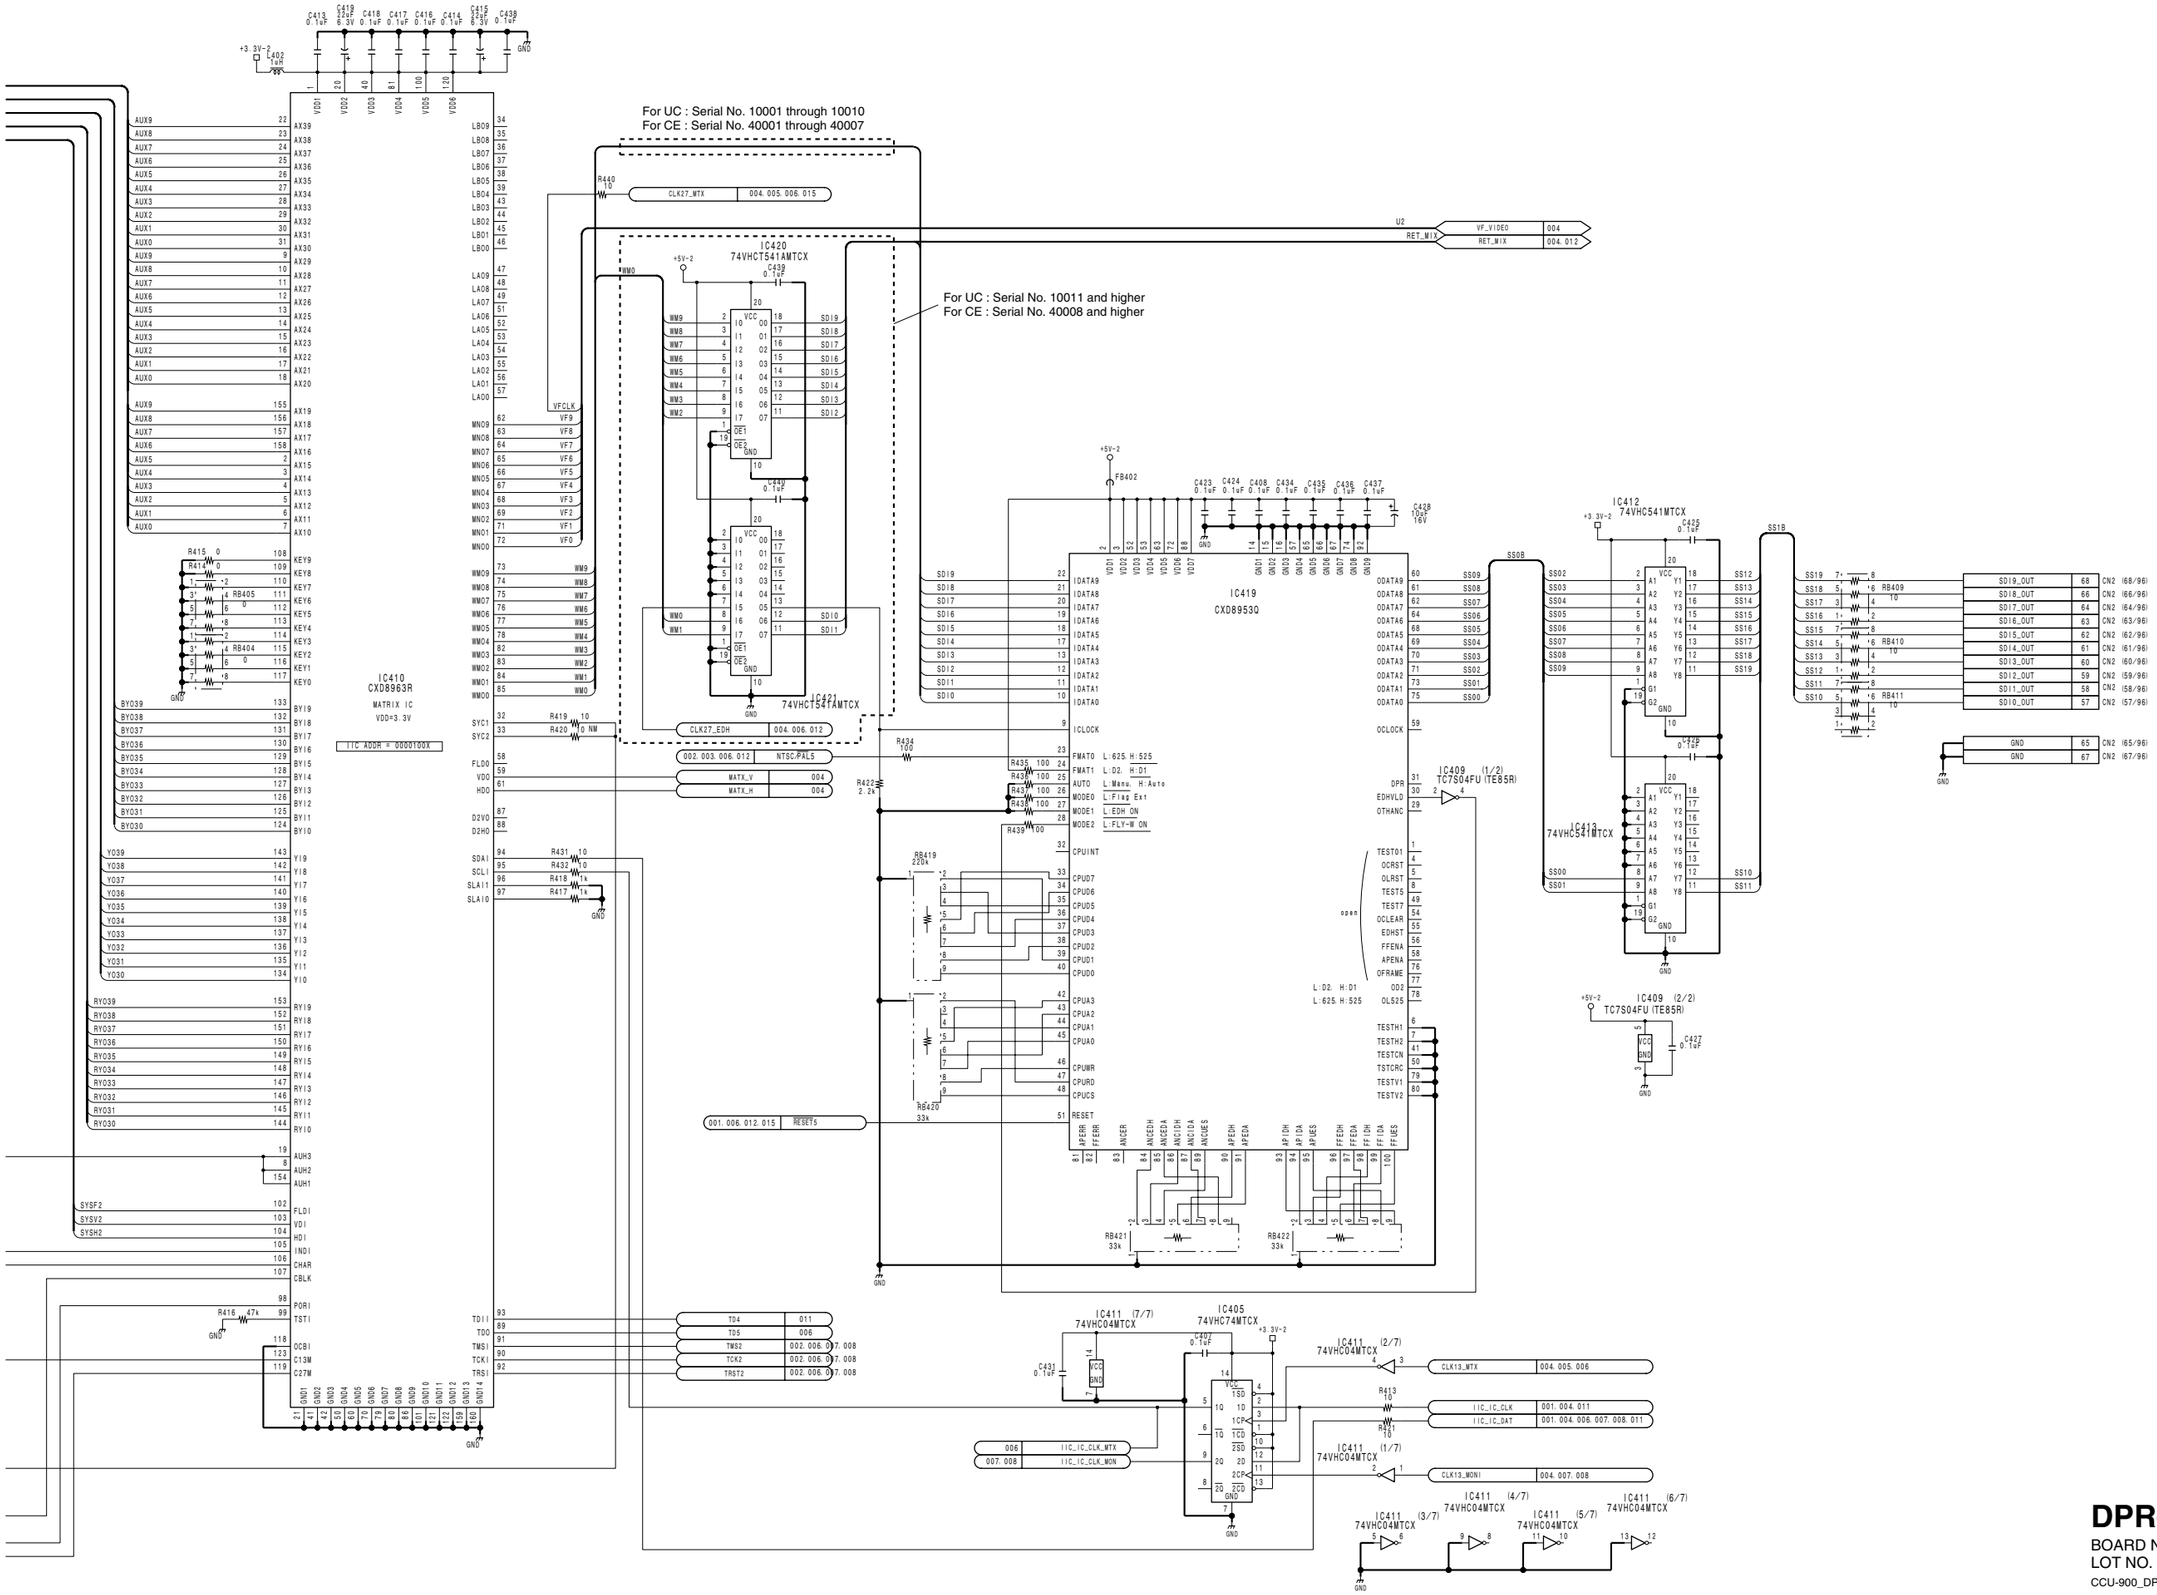

DPR-69 (5/15)

BOARD NO. 1-675-810-11, 12, 13
LOT NO. 912-

CCU-900_DPR-69_013_5

DPR-69 (6/15)

CCU-900 (UC) : S/N 10001 and Higher
CCU-900 (J) : S/N 30001 and Higher
CCU-900P (CE) : S/N 40001 and Higher

For UC : Serial No. 10001 through 10010
For CE : Serial No. 40001 through 40007

For UC : Serial No. 10011 and higher
For CE : Serial No. 40008 and higher

IC502 74VHC574MTCX
IC506 74VHC574MTCX
IC508 74VHC574MTCX
IC507 74VHC574MTCX
IC509 74VHC574MTCX
IC503 CXD8963R MATRIX IC
VDD=3.3V
IIC ADDR = 0000101X
IC513 74VHC541AMTCX
IC514 74VHC541AMTCX
IC501 CXD8953Q
IC504 74VHC541MTCX
IC505 74VHC541MTCX
IC511 (1/2) TC7S04FU (TE85R)
IC512 (1/2) TC7SH04FU-TE85R
IC512 (2/2) TC7SH04FU-TE85R
IC511 (2/2) TC7S04FU (TE85R)

003. 005	MTX_FVH
009	MONI_BY_CC
009	MONI_Y_CC
009	MONI_RY_CC
004. 005	CLK13_MTX
004. 005. 012	CLK27_EDH
005	AUX_HD
009	PGATE4
005	CHAR_MTX2
005	CHAR_BG-MTX2
001. 003. 004. 005. 007. 008. 009. 010. 011. 013. 014	RESET
004. 005. 015	CLK27_MTX
001. 005. 012. 015	RESET5
005	TD5
008	TD6
002. 005. 007. 008	TMS2
002. 005. 007. 008	TCK2
002. 005. 007. 008	TRST2
001. 004. 005. 007. 008. 011	IIC_IC_DAT
005	IIC_IC_CLK_MTX
002. 003. 005. 012	NTSC/PAL5

SDI_PIX9_OUT	56 CN2 (56/96)
SDI_PIX8_OUT	55 CN2 (55/96)
SDI_PIX7_OUT	54 CN2 (54/96)
SDI_PIX6_OUT	53 CN2 (53/96)
SDI_PIX5_OUT	52 CN2 (52/96)
SDI_PIX4_OUT	51 CN2 (51/96)
SDI_PIX3_OUT	50 CN2 (50/96)
SDI_PIX2_OUT	49 CN2 (49/96)
SDI_PIX1_OUT	48 CN2 (48/96)
SDI_PIX0_OUT	46 CN2 (46/96)
GND	45 CN2 (45/96)
GND	47 CN2 (47/96)

DPR-69 (6/15)

BOARD NO. 1-675-810-11, 12, 13
LOT NO. 912-
CCU-900_DPR-69_013_6

DPR-69 (7/15)

CCU-900 (UC) : S/N 10001 and Higher
CCU-900 (J) : S/N 30001 and Higher
CCU-900P (CE) : S/N 40001 and Higher

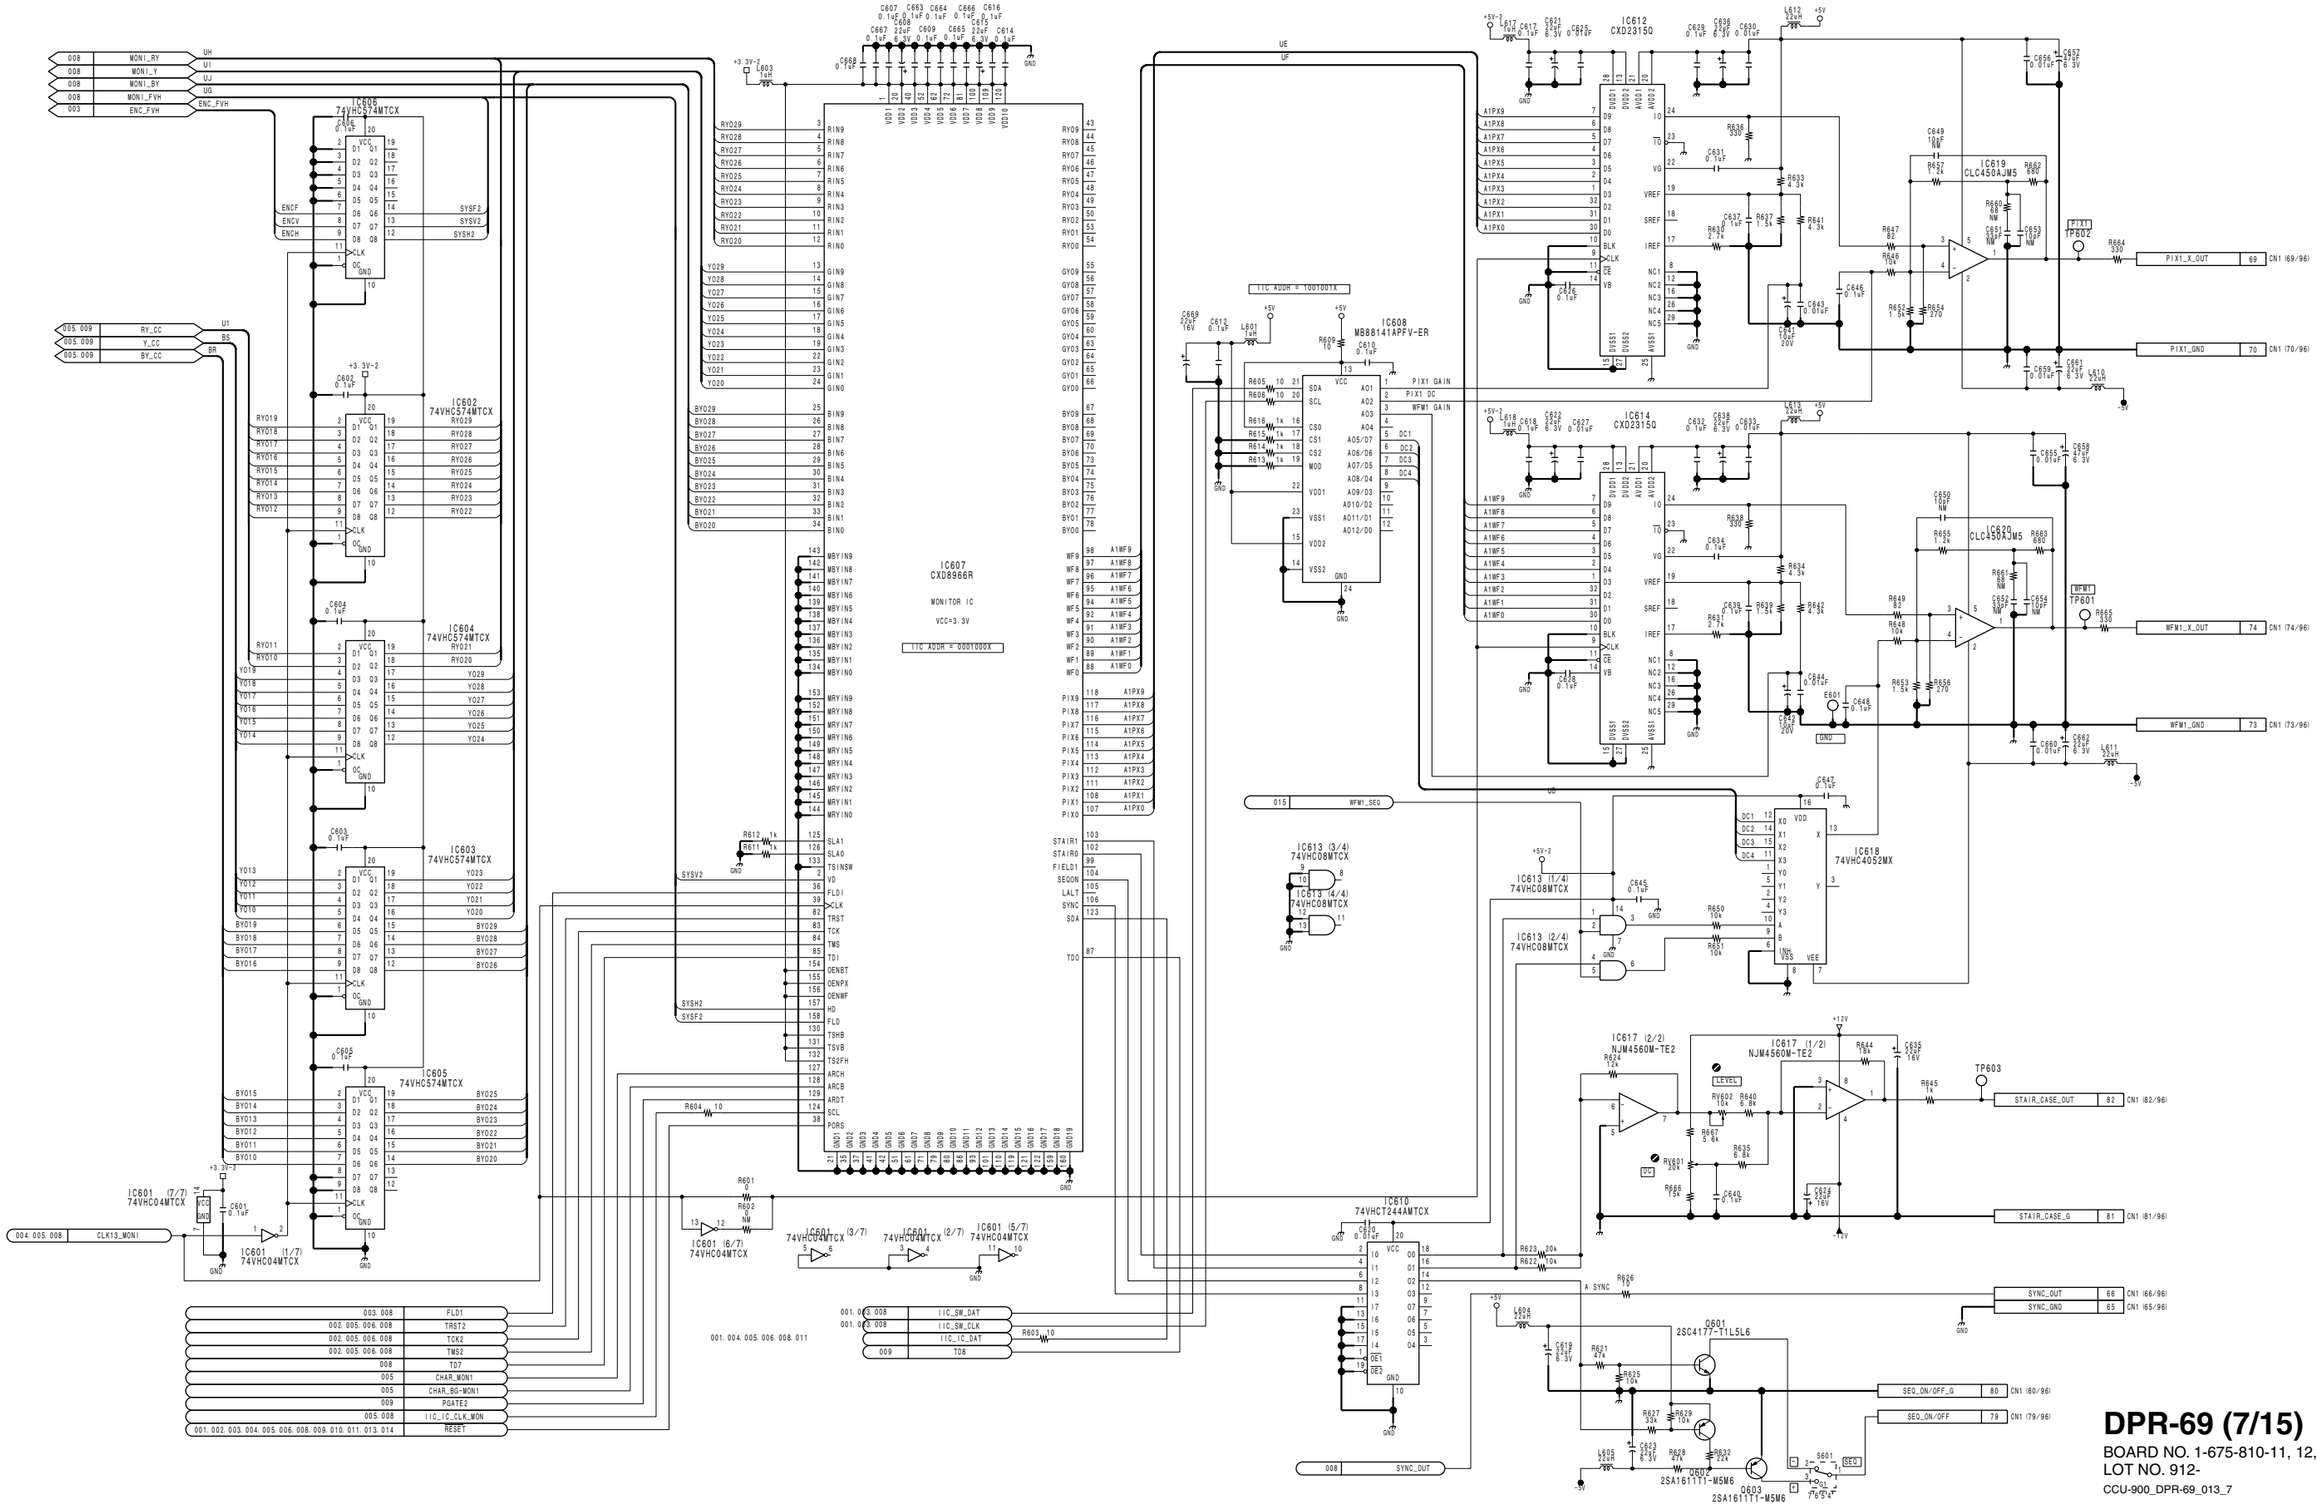

DPR-69 (7/15)
BOARD NO. 1-675-810-11, 12, 13
LOT NO. 912-
CCU-900_DPR-69_013_7

DPR-69 (8/15)

CCU-900 (UC) : S/N 10001 and Higher
CCU-900 (J) : S/N 30001 and Higher
CCU-900P (CE) : S/N 40001 and Higher

For UC : Serial No. 10001 through 10010
For CE : Serial No. 40001 through 40007

For UC : Serial No. 10011 and higher
For CE : Serial No. 40008 and higher

For UC : Serial No. 10011 and higher
For CE : Serial No. 40008 and higher

For UC : Serial No. 10011 and higher
For CE : Serial No. 40008 and higher

DPR-69 (8/15)

BOARD NO. 1-675-810-11, 12, 13
LOT NO. 912-
CCU-900_DPR-69_013_8

DPR-69 (9/15)

CCU-900 (UC) : S/N 10001 and Higher
CCU-900 (J) : S/N 30001 and Higher
CCU-900P (CE) : S/N 40001 and Higher

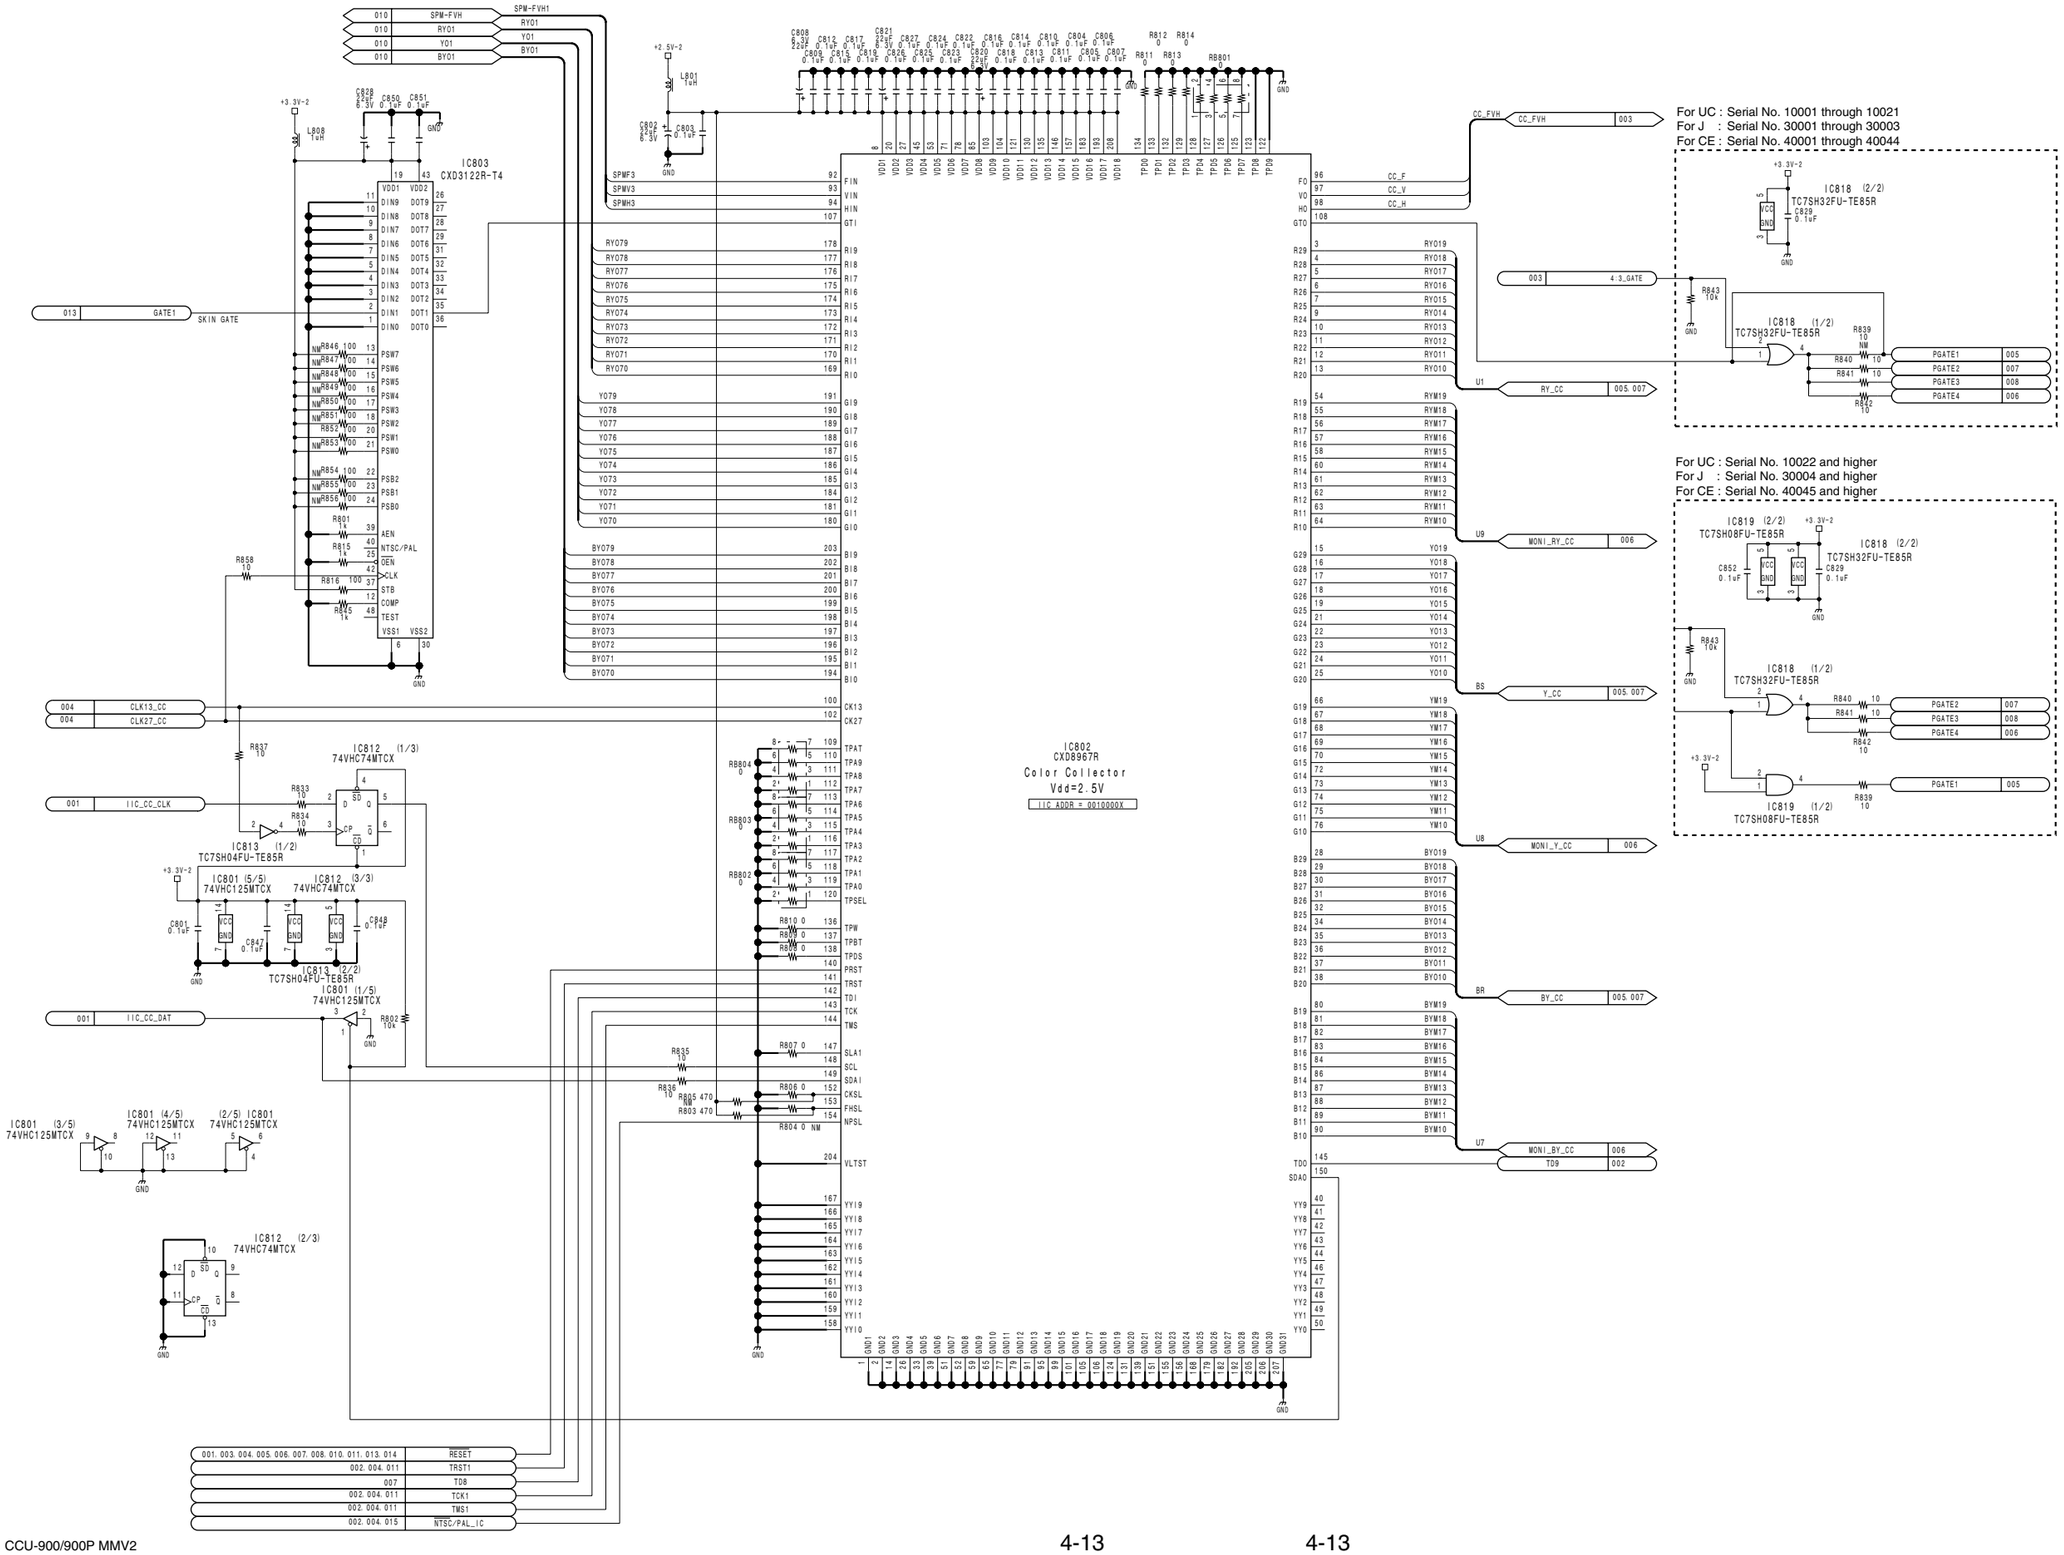

CCU-900/900P MMV2

4-13

4-13

DPR-69 (9/15)
BOARD NO. 1-675-810-11, 12, 13
LOT NO. 912-
CCU-900_DPR-69_013_9

DPR-69 (10/15)

CCU-900 (UC) : S/N 10001 and Higher
CCU-900 (J) : S/N 30001 and Higher
CCU-900P (CE) : S/N 40001 and Higher

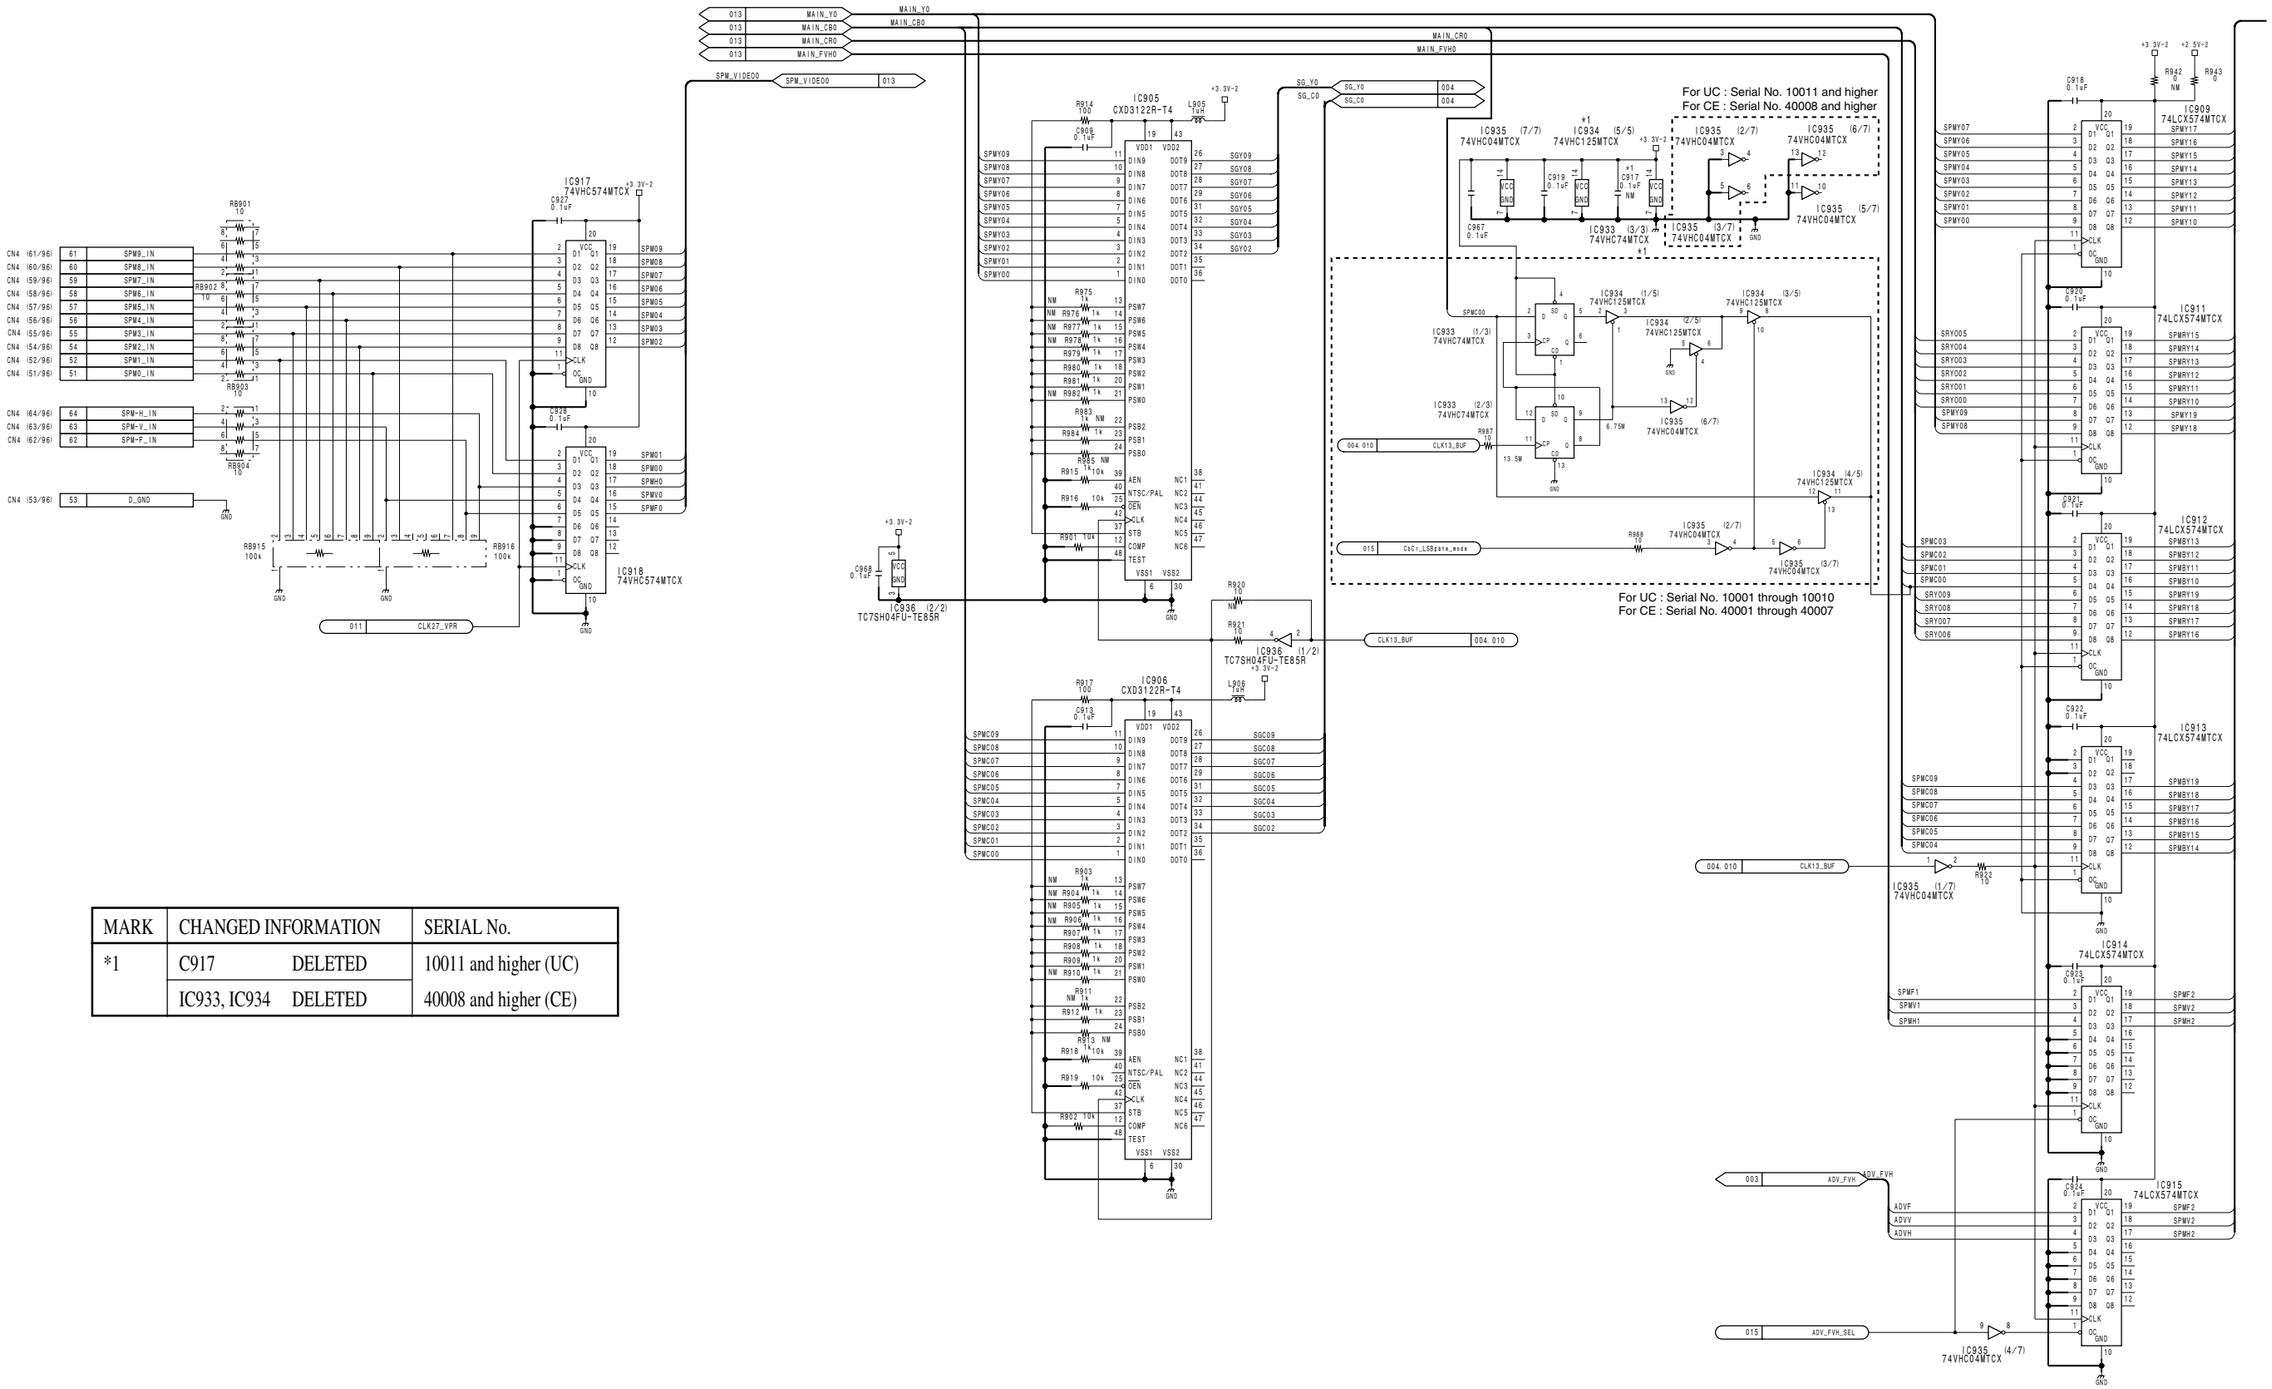

MARK	CHANGED INFORMATION		SERIAL No.
*1	C917	DELETED	10011 and higher (UC)
	IC933, IC934	DELETED	40008 and higher (CE)

4-14

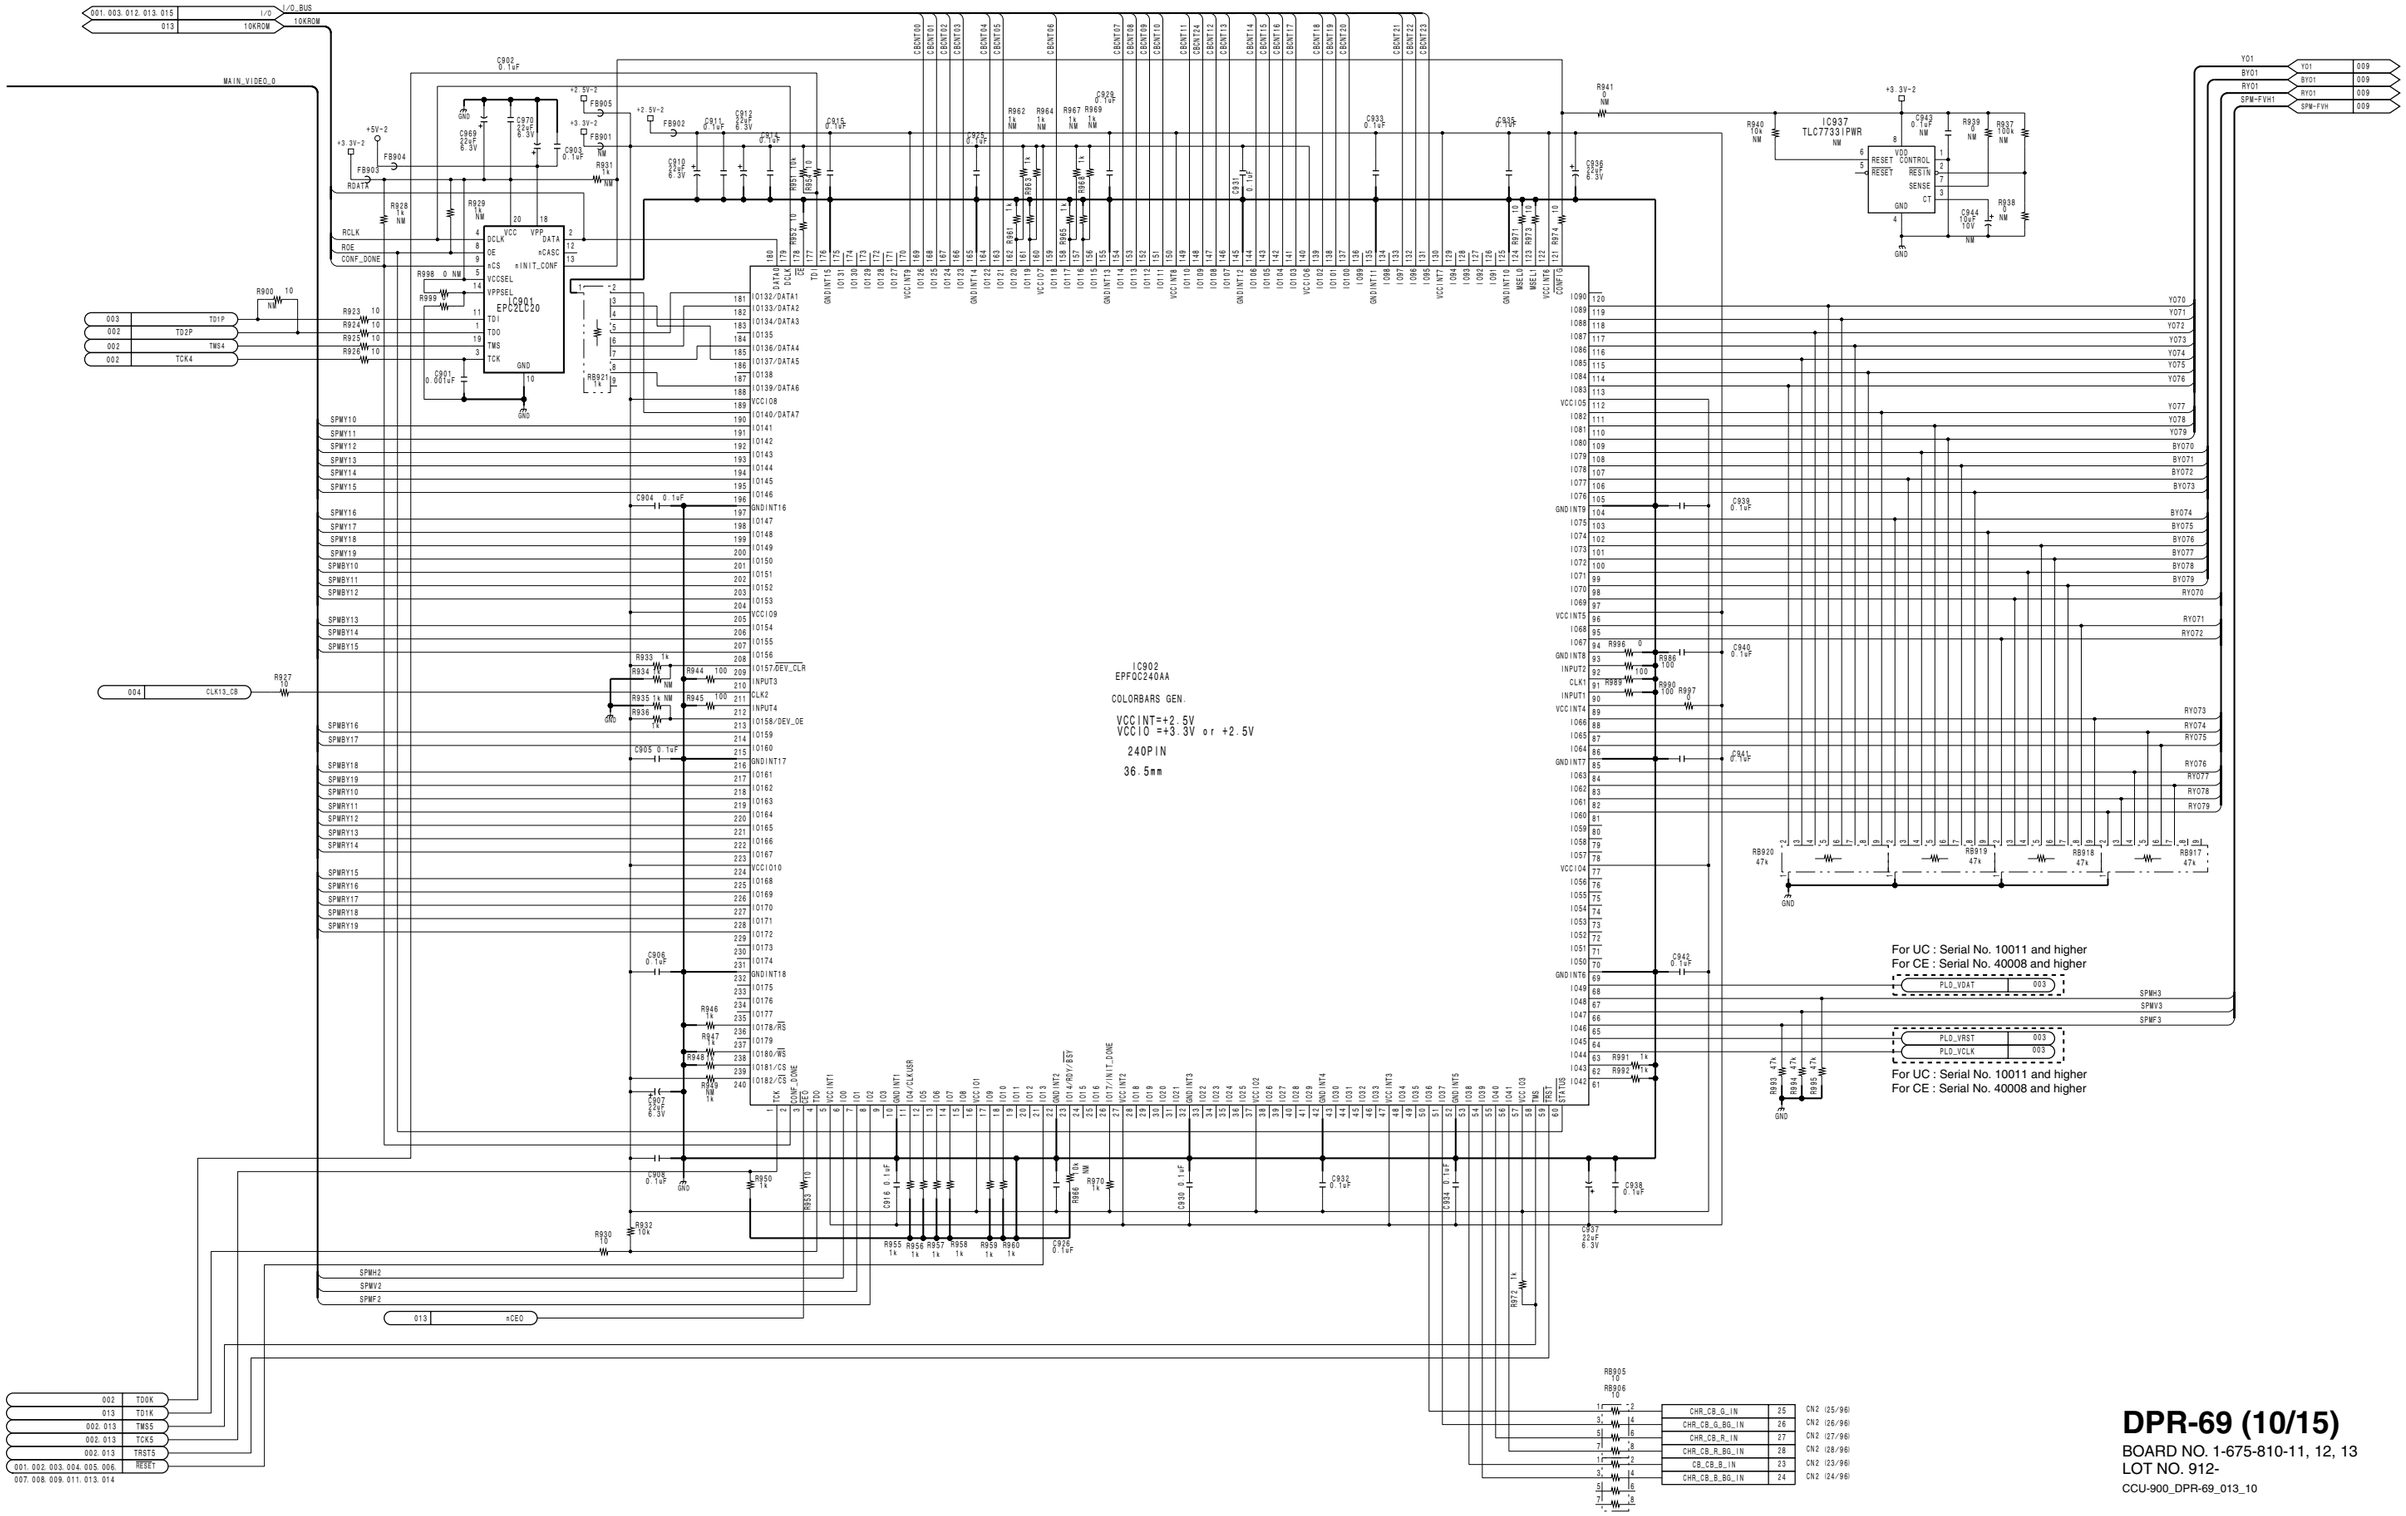

DPR-69 (10/15)

BOARD NO. 1-675-810-11, 12, 13
LOT NO. 912-

CCU-900_DPR-69_013_10

DPR-69 (11/15)

CCU-900 (UC) : S/N 10001 and Higher
CCU-900 (J) : S/N 30001 and Higher
CCU-900P (CE) : S/N 40001 and Higher

54MHzVCO & PLL

IC1012
CXD8961R
17
OPTICAL TRANSFAR CO PROCESSER
Murayama IC
VCC=+2.5V
240PIN
36.5mm
I²C ADDR = 0101000X

For UC : Serial No. 10011 and higher
For CE : Serial No. 40008 and higher

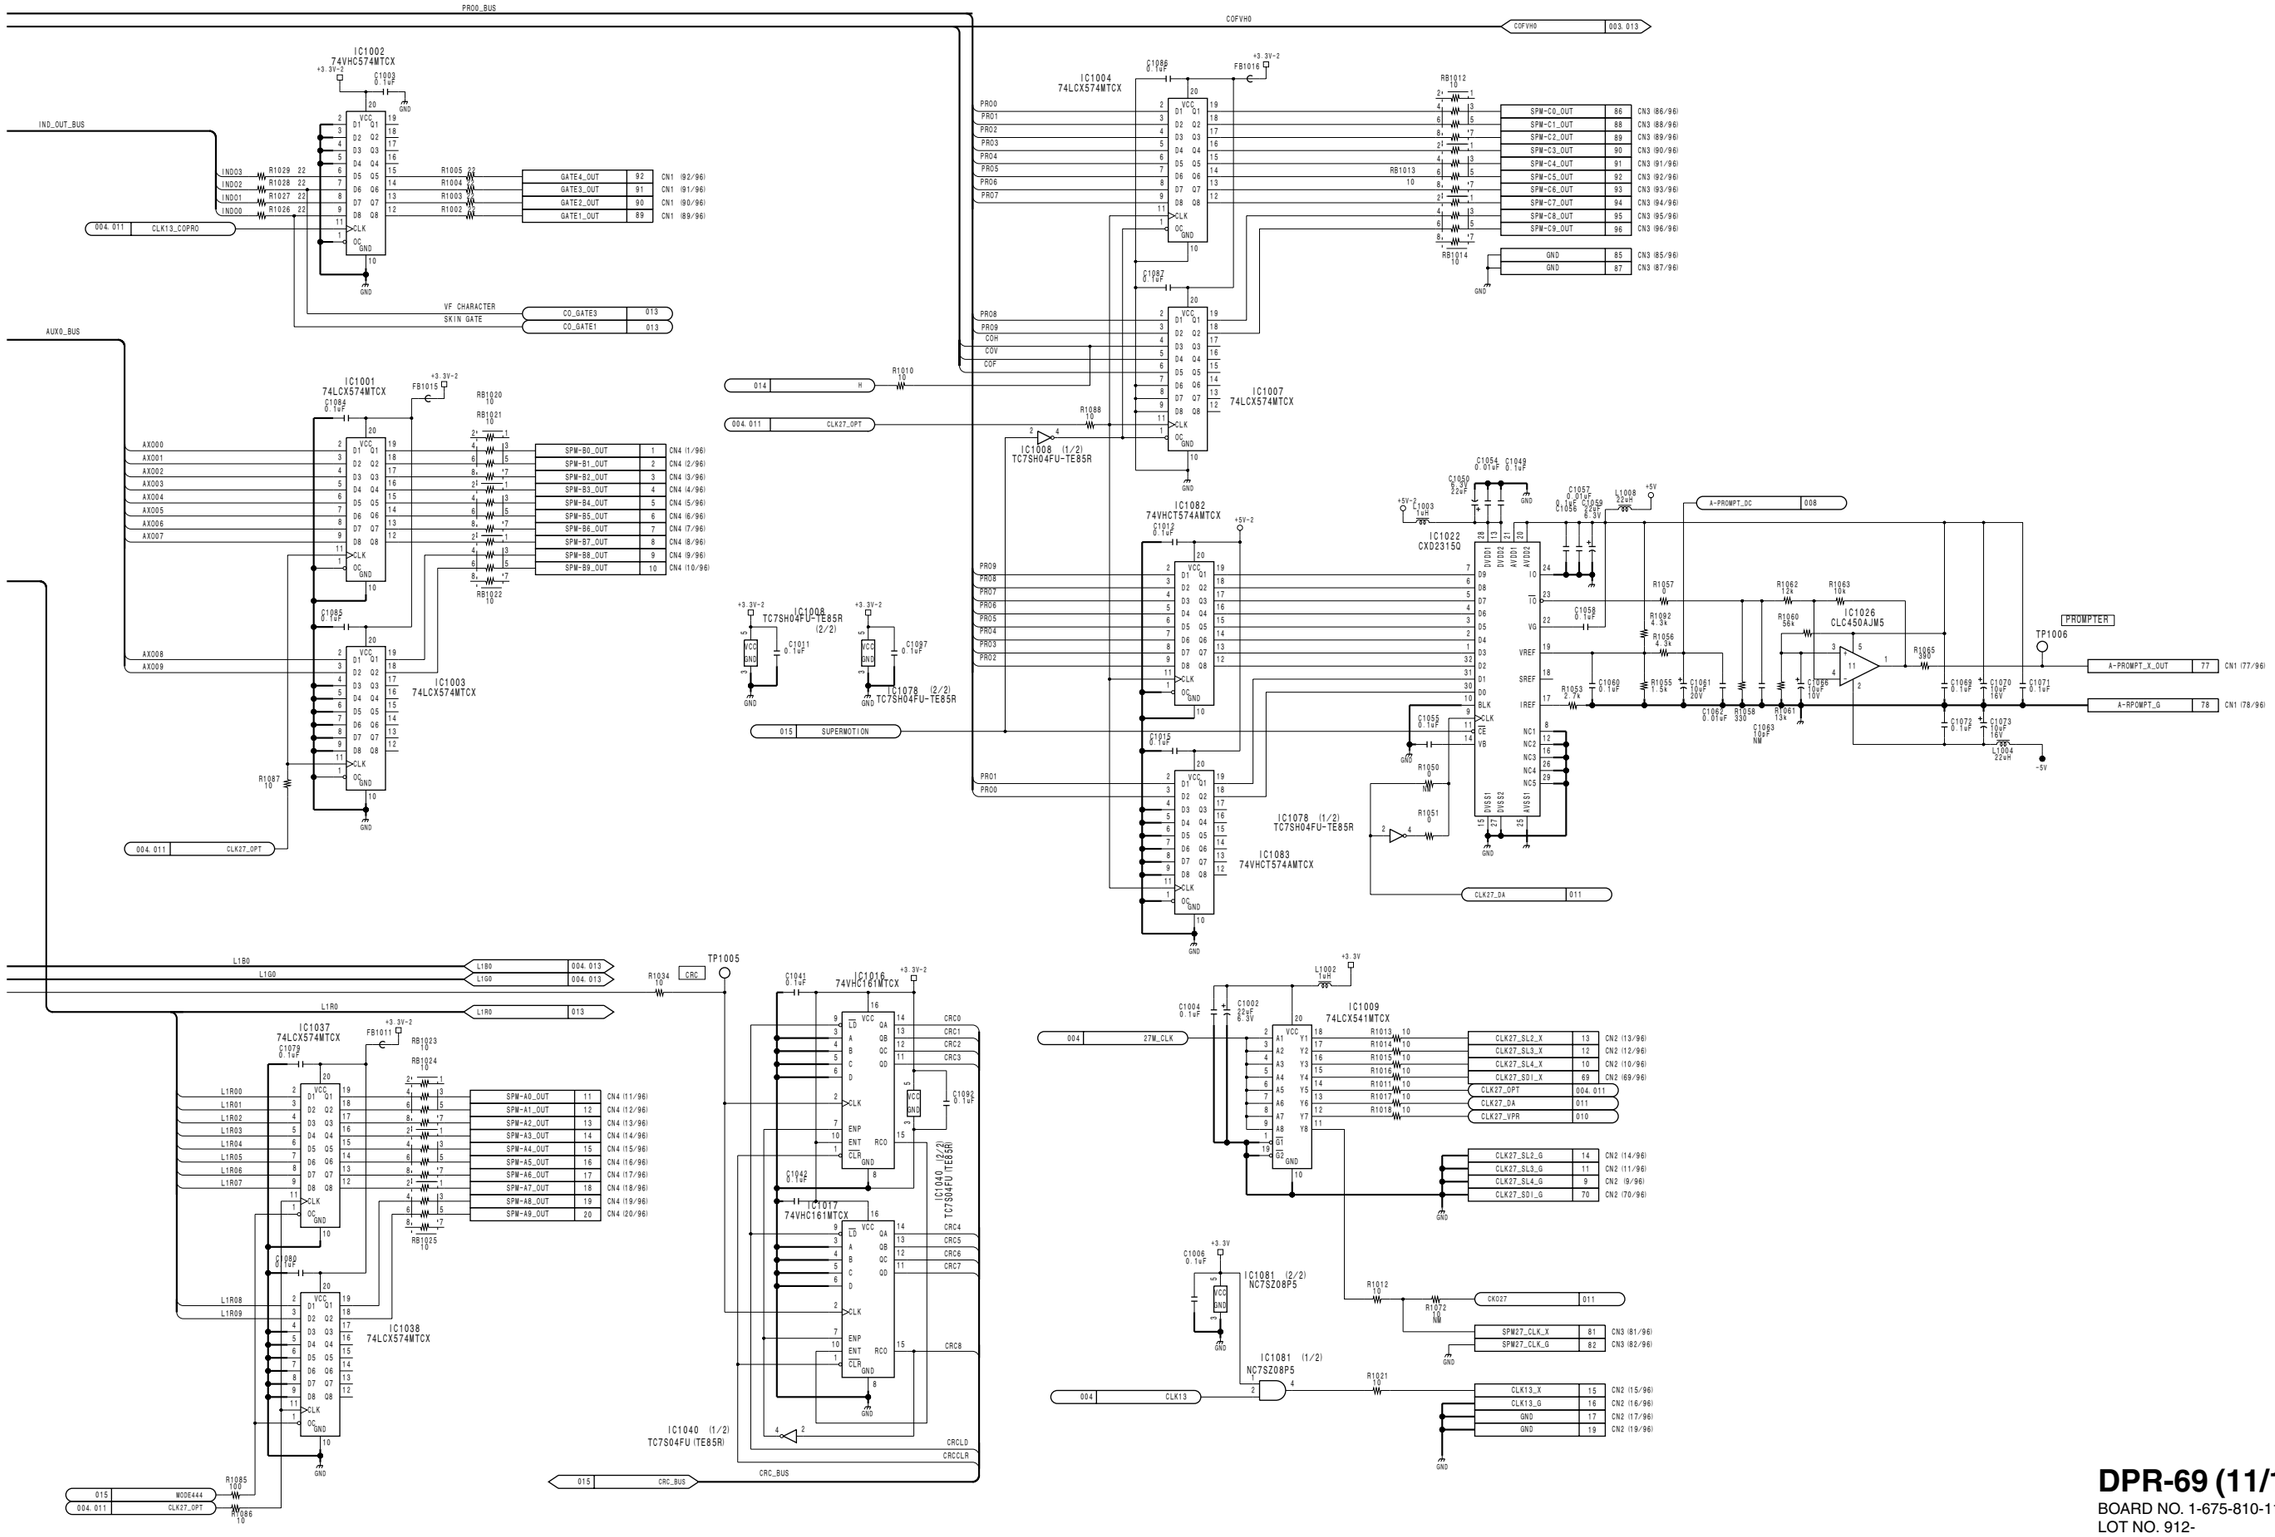

DPR-69 (11/15)

BOARD NO. 1-675-810-11, 12, 13
LOT NO. 912-
CCU-900_DPR-69_013_11

DPR-69 (12/15)

CCU-900 (UC) : S/N 10001 and Higher
CCU-900 (J) : S/N 30001 and Higher
CCU-900P (CE) : S/N 40001 and Higher

4-18

A B C D E F G H

DPR-69 (12/15)

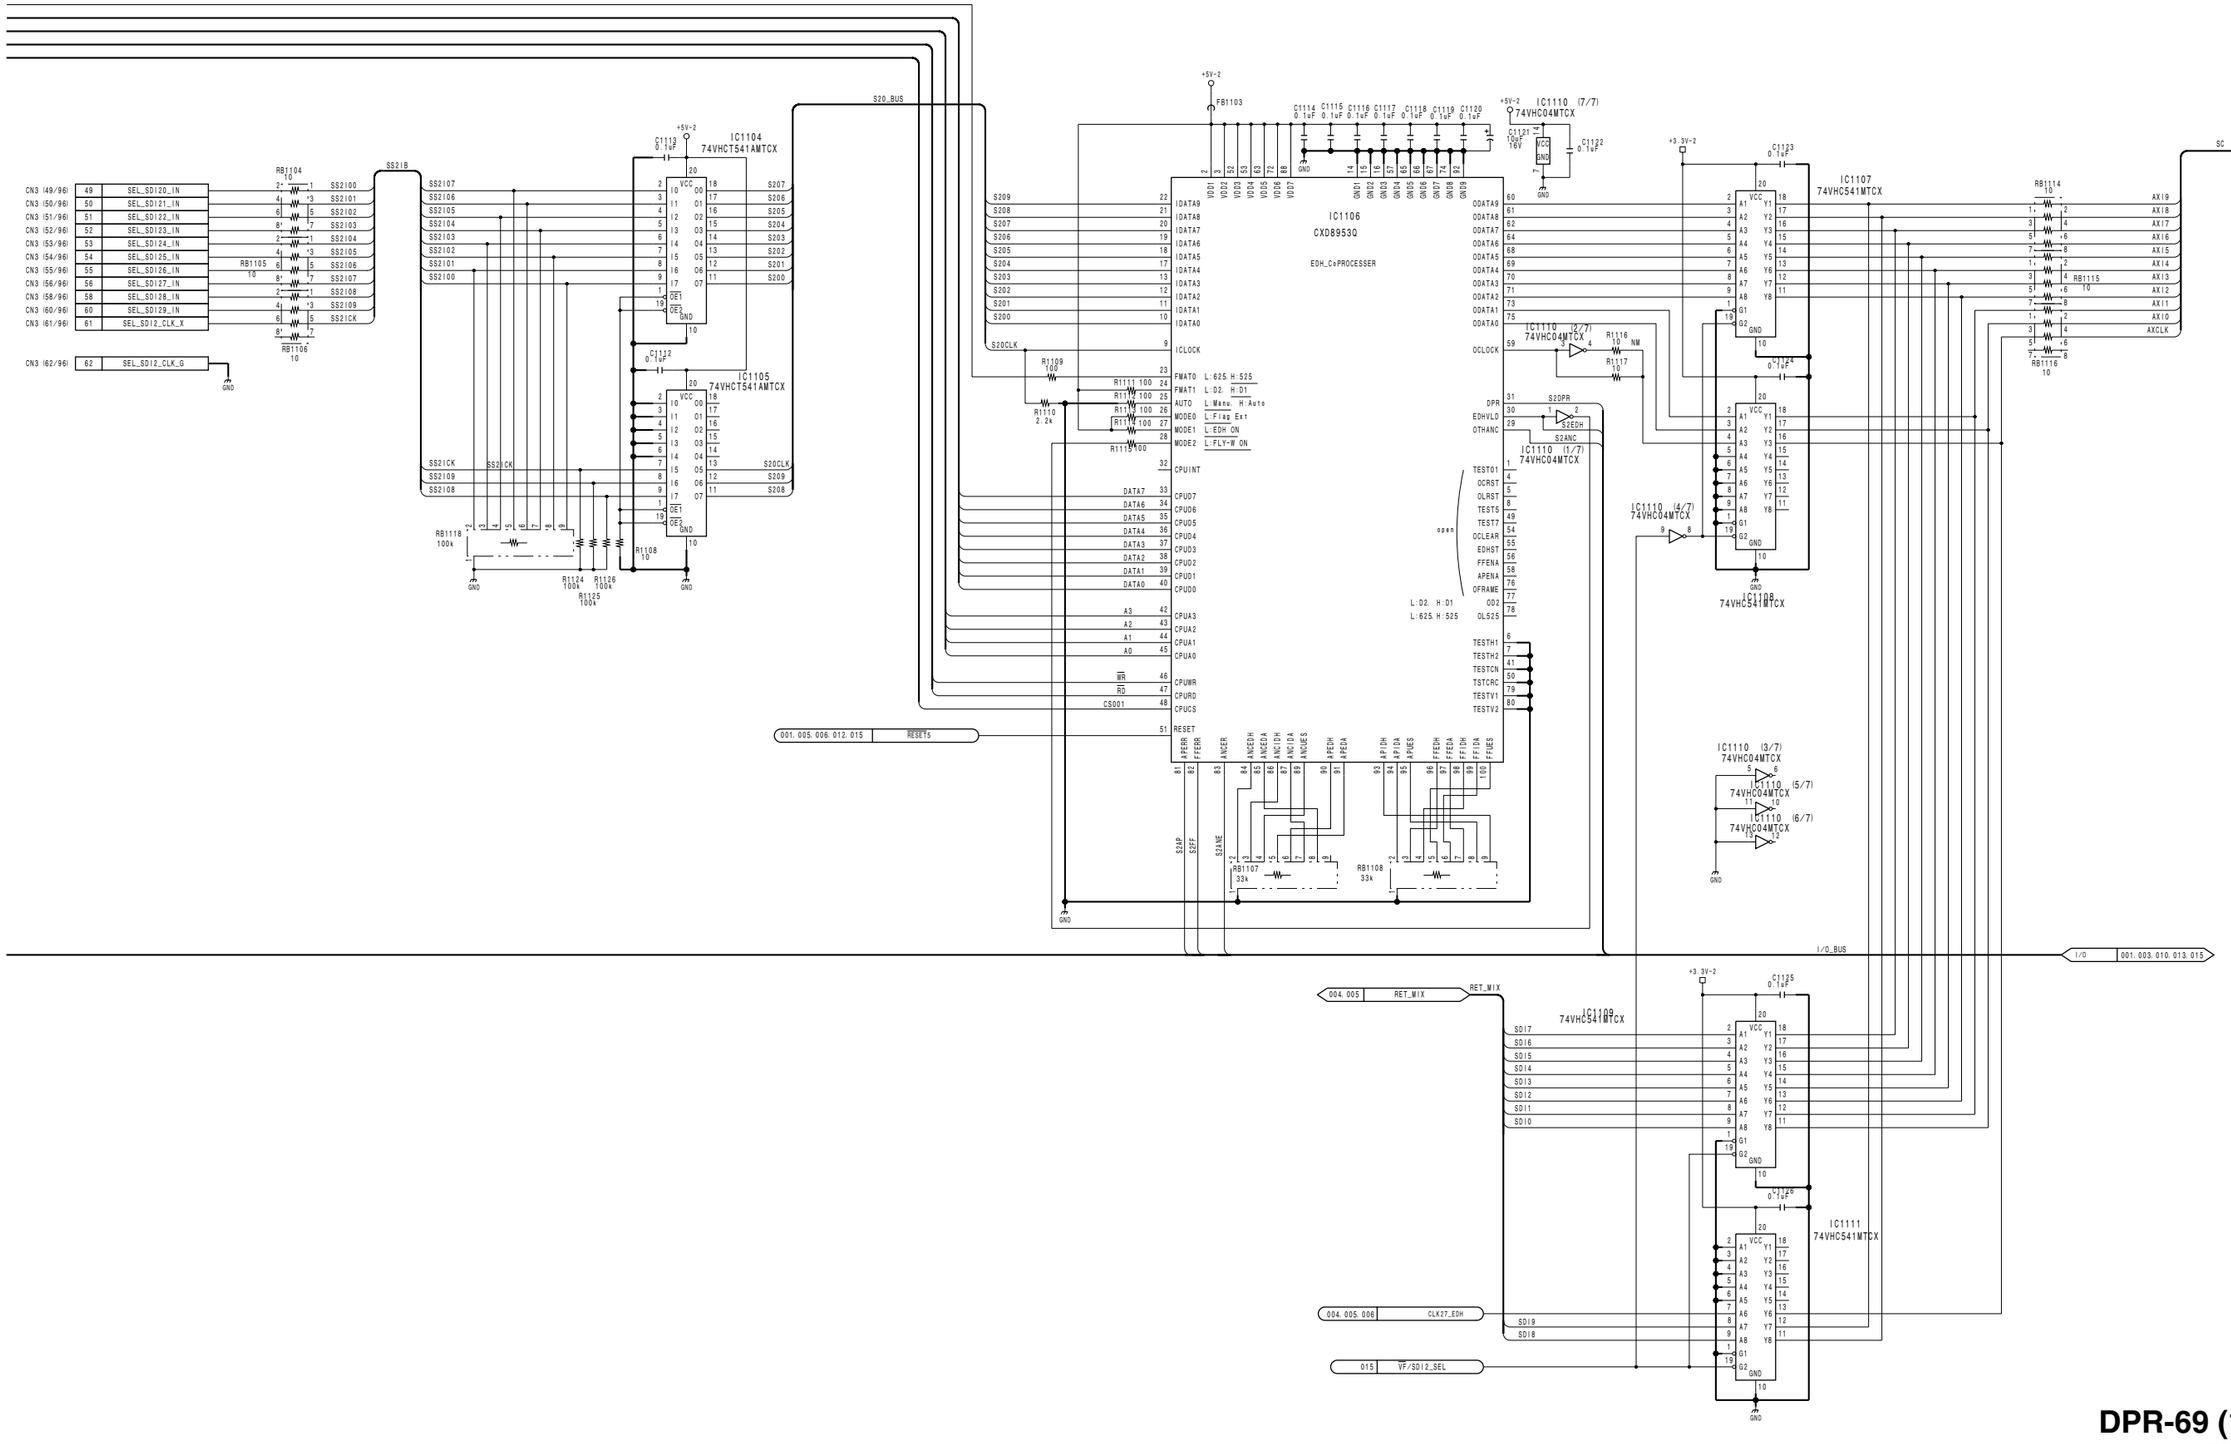

DPR-69 (12/15)

BOARD NO. 1-675-810-11, 12, 13
LOT NO. 912-
CCU-900_DPR-69_013_12

DPR-69 (13/15)

CCU-900 (UC) : S/N 10001 and Higher
CCU-900 (J) : S/N 30001 and Higher
CCU-900P (CE) : S/N 40001 and Higher

For UC : Serial No. 10011 and higher
For CE : Serial No. 40008 and higher

For UC : Serial No. 10001 through 10010
For CE : Serial No. 40001 through 40007

IC1201
EPFQC240AA

SELECT
VCCIO=+3.3V
VCCINT=+2.5V
240PIN
36.5mm

IC1202
MB81F643242B-10FN

IC1203 (2/2)
NC7SZ08P5

IC1204 (2/2)
NC7SZ08P5

IC1203 (1/2)
NC7SZ08P5

IC1204 (1/2)
NC7SZ08P5

4-20

DPR-69 (13/15)
BOARD NO. 1-675-810-11, 12, 13
LOT NO. 912-
CCU-900_DPR-69_013_13

DPR-69 (14/15)

CCU-900 (UC) : S/N 10001 and Higher
CCU-900 (J) : S/N 30001 and Higher
CCU-900P (CE) : S/N 40001 and Higher

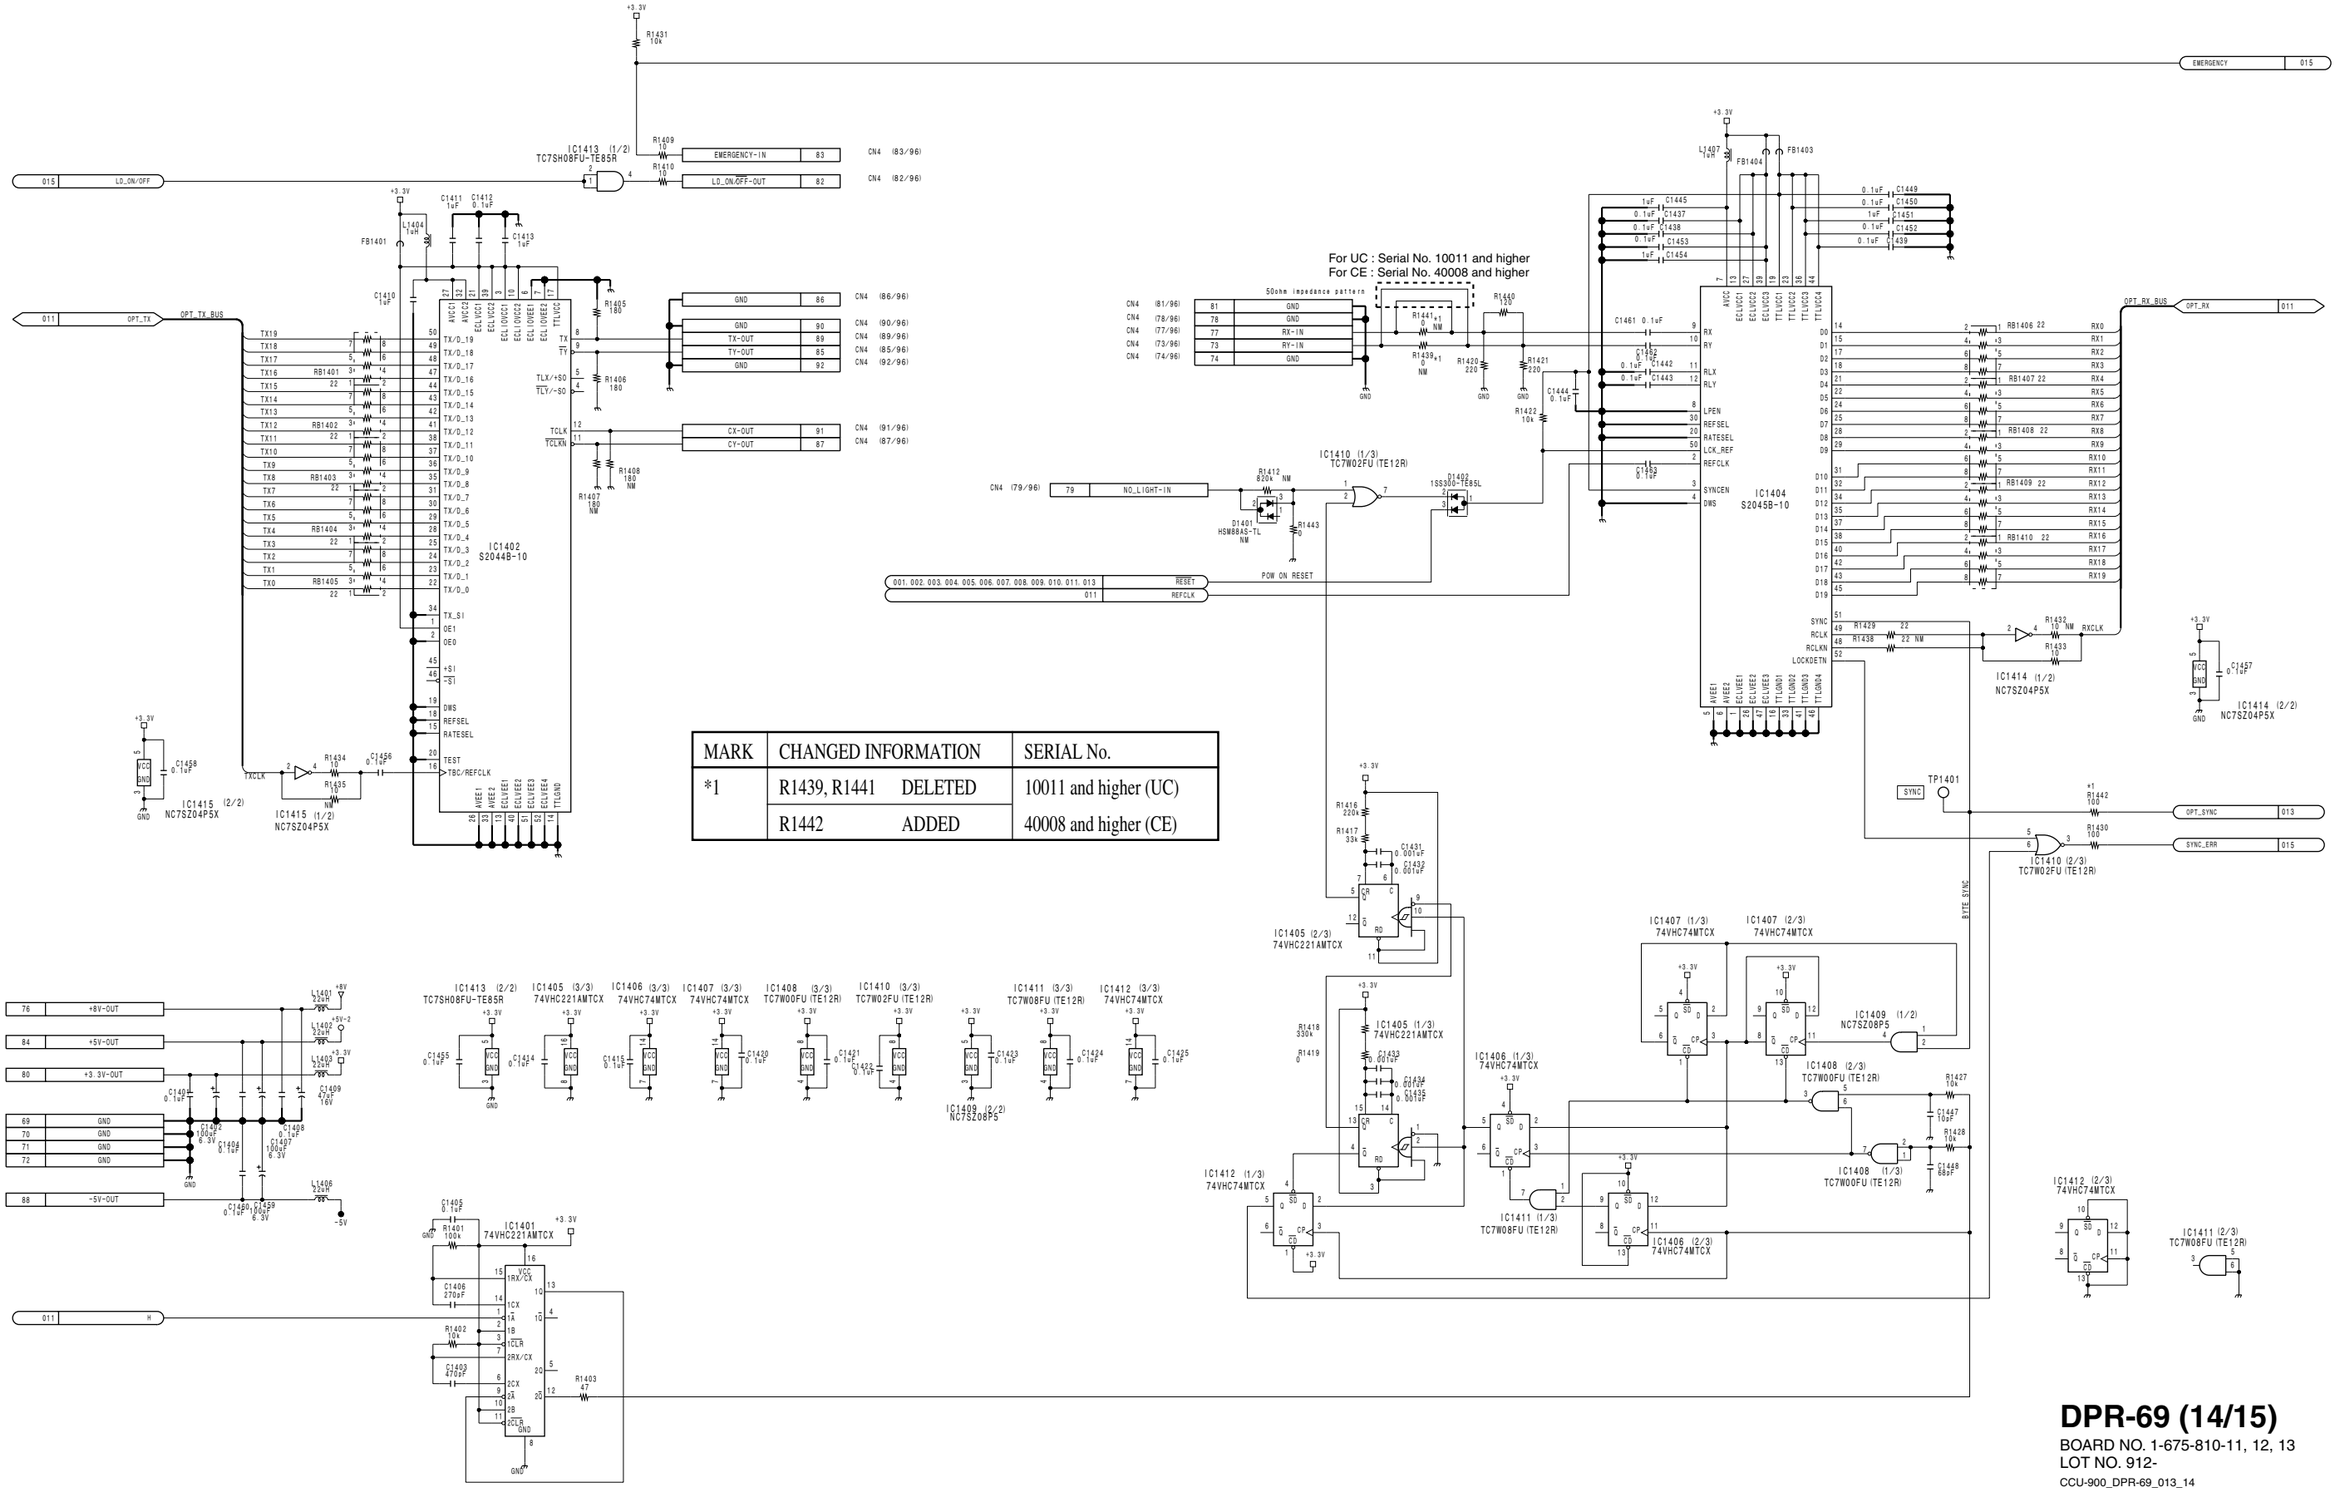

MARK	CHANGED INFORMATION	SERIAL No.
*1	R1439, R1441 DELETED	10011 and higher (UC)
	R1442 ADDED	40008 and higher (CE)

DPR-69 (14/15)
BOARD NO. 1-675-810-11, 12, 13
LOT NO. 912-
CCU-900_DPR-69_013_14

DPR-69 (15/15)

CCU-900 (UC) : S/N 10001 and Higher
CCU-900 (J) : S/N 30001 and Higher
CCU-900P (CE) : S/N 40001 and Higher

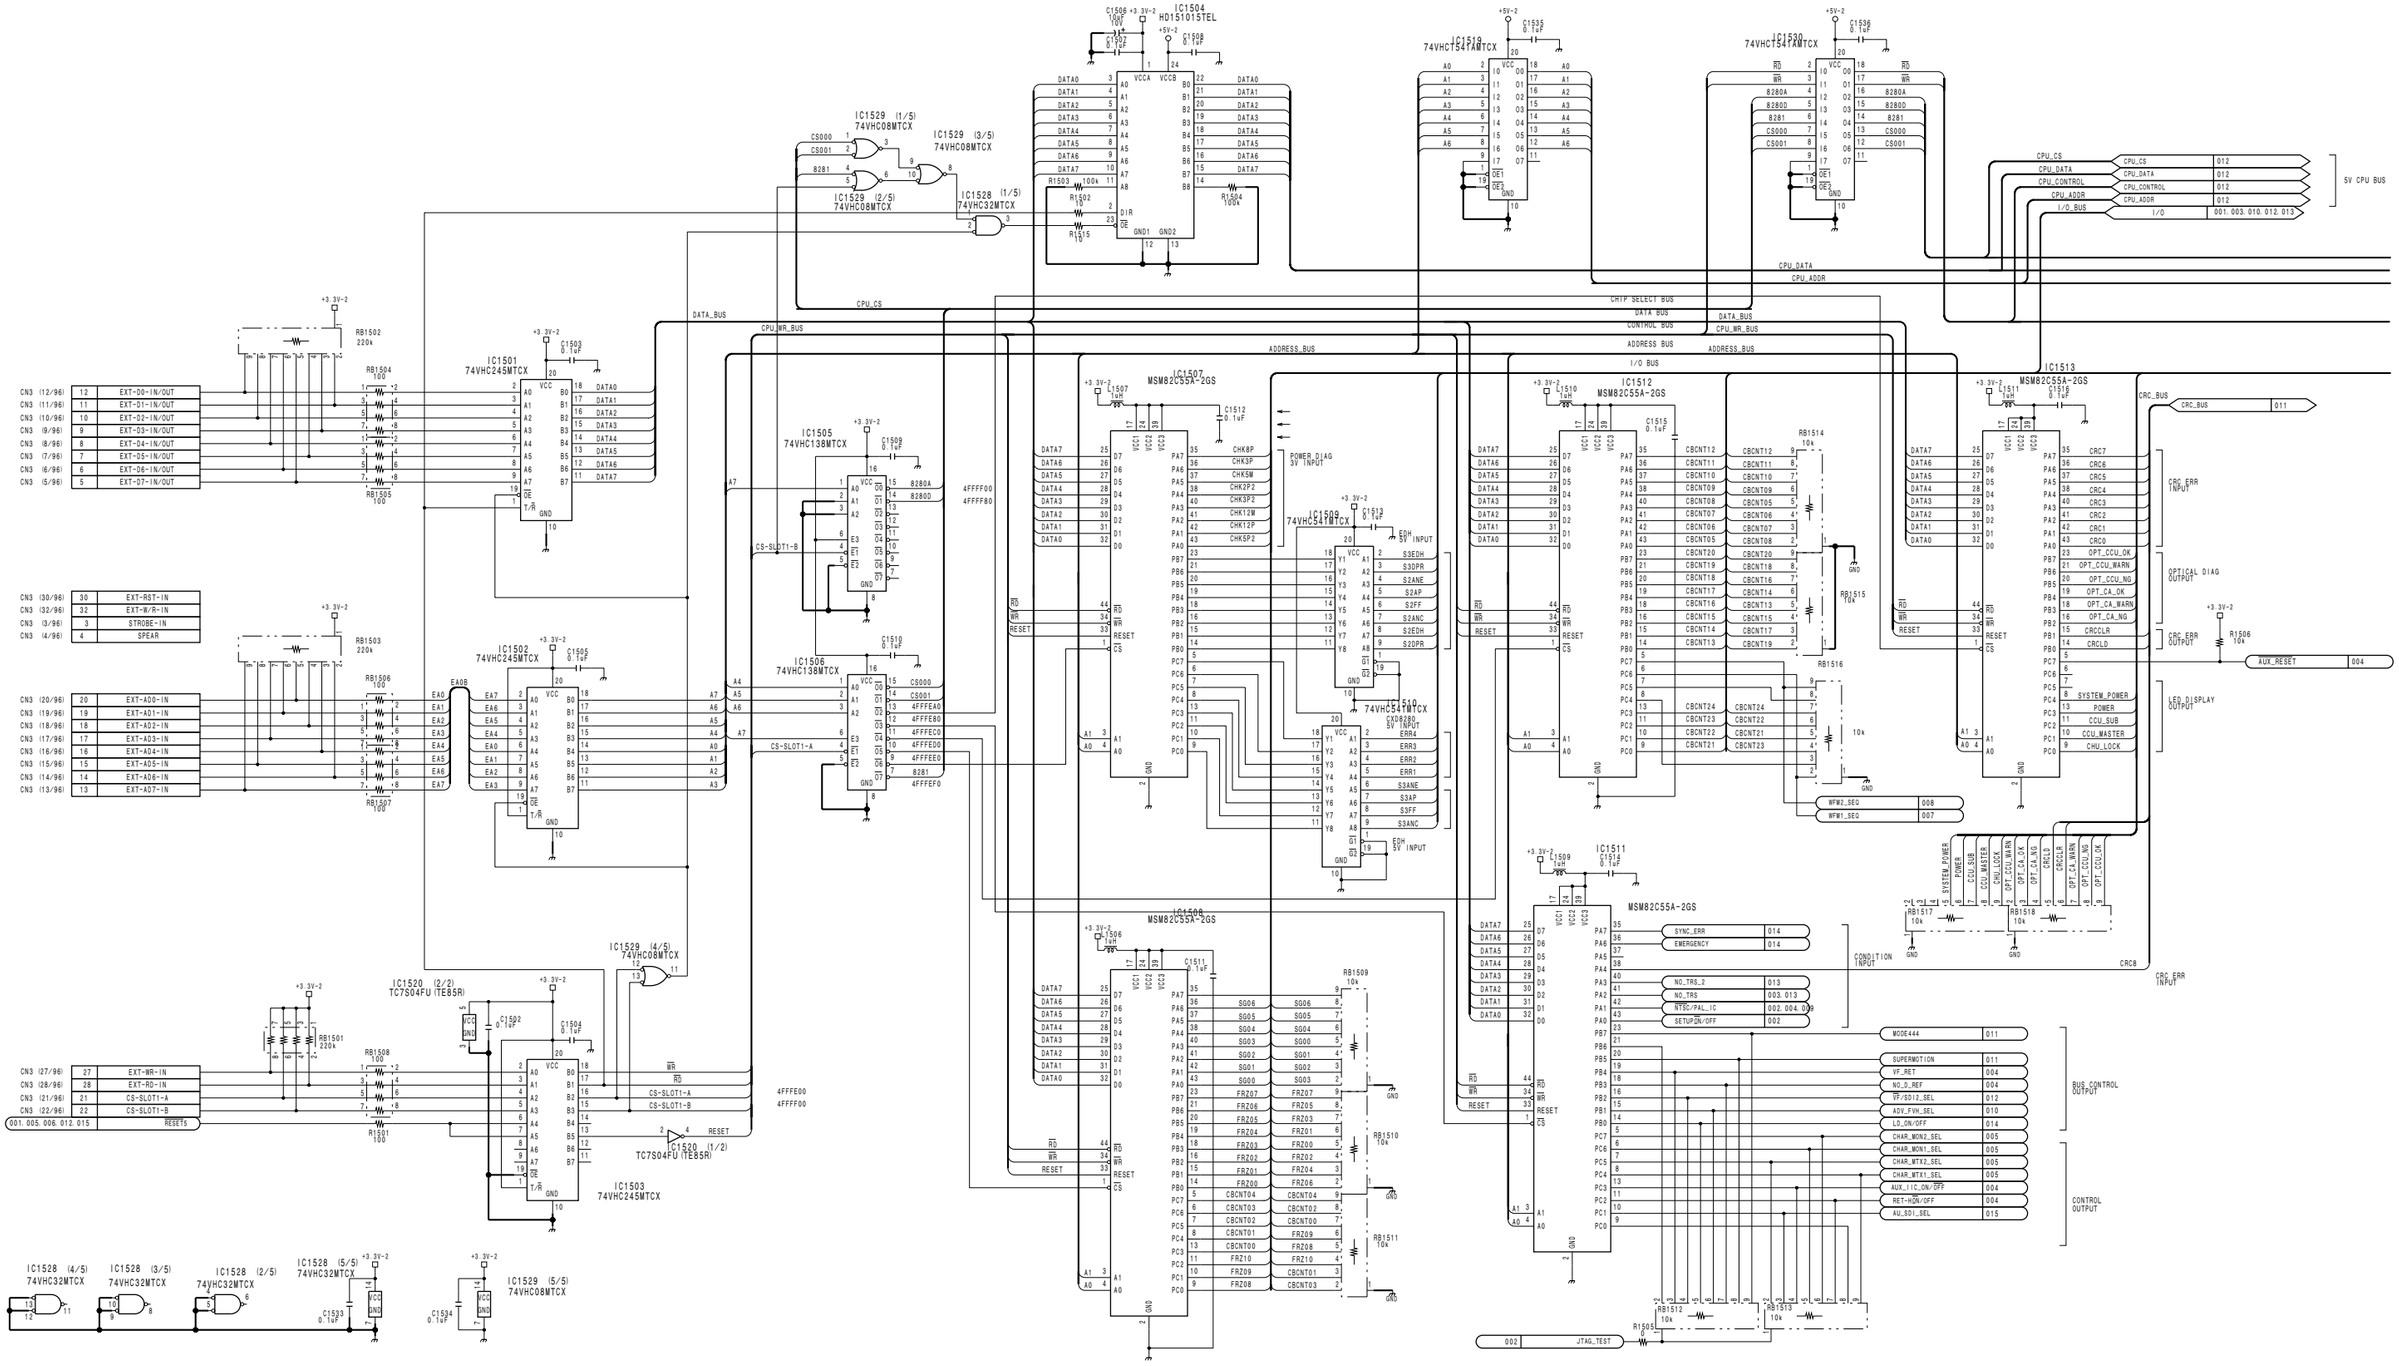

4-22

DPR-69 (15/15)

MARK	CHANGED INFORMATION	SERIAL No.
*1	C1527 DELETED	10011 and higher (UC) 40008 and higher (CE)

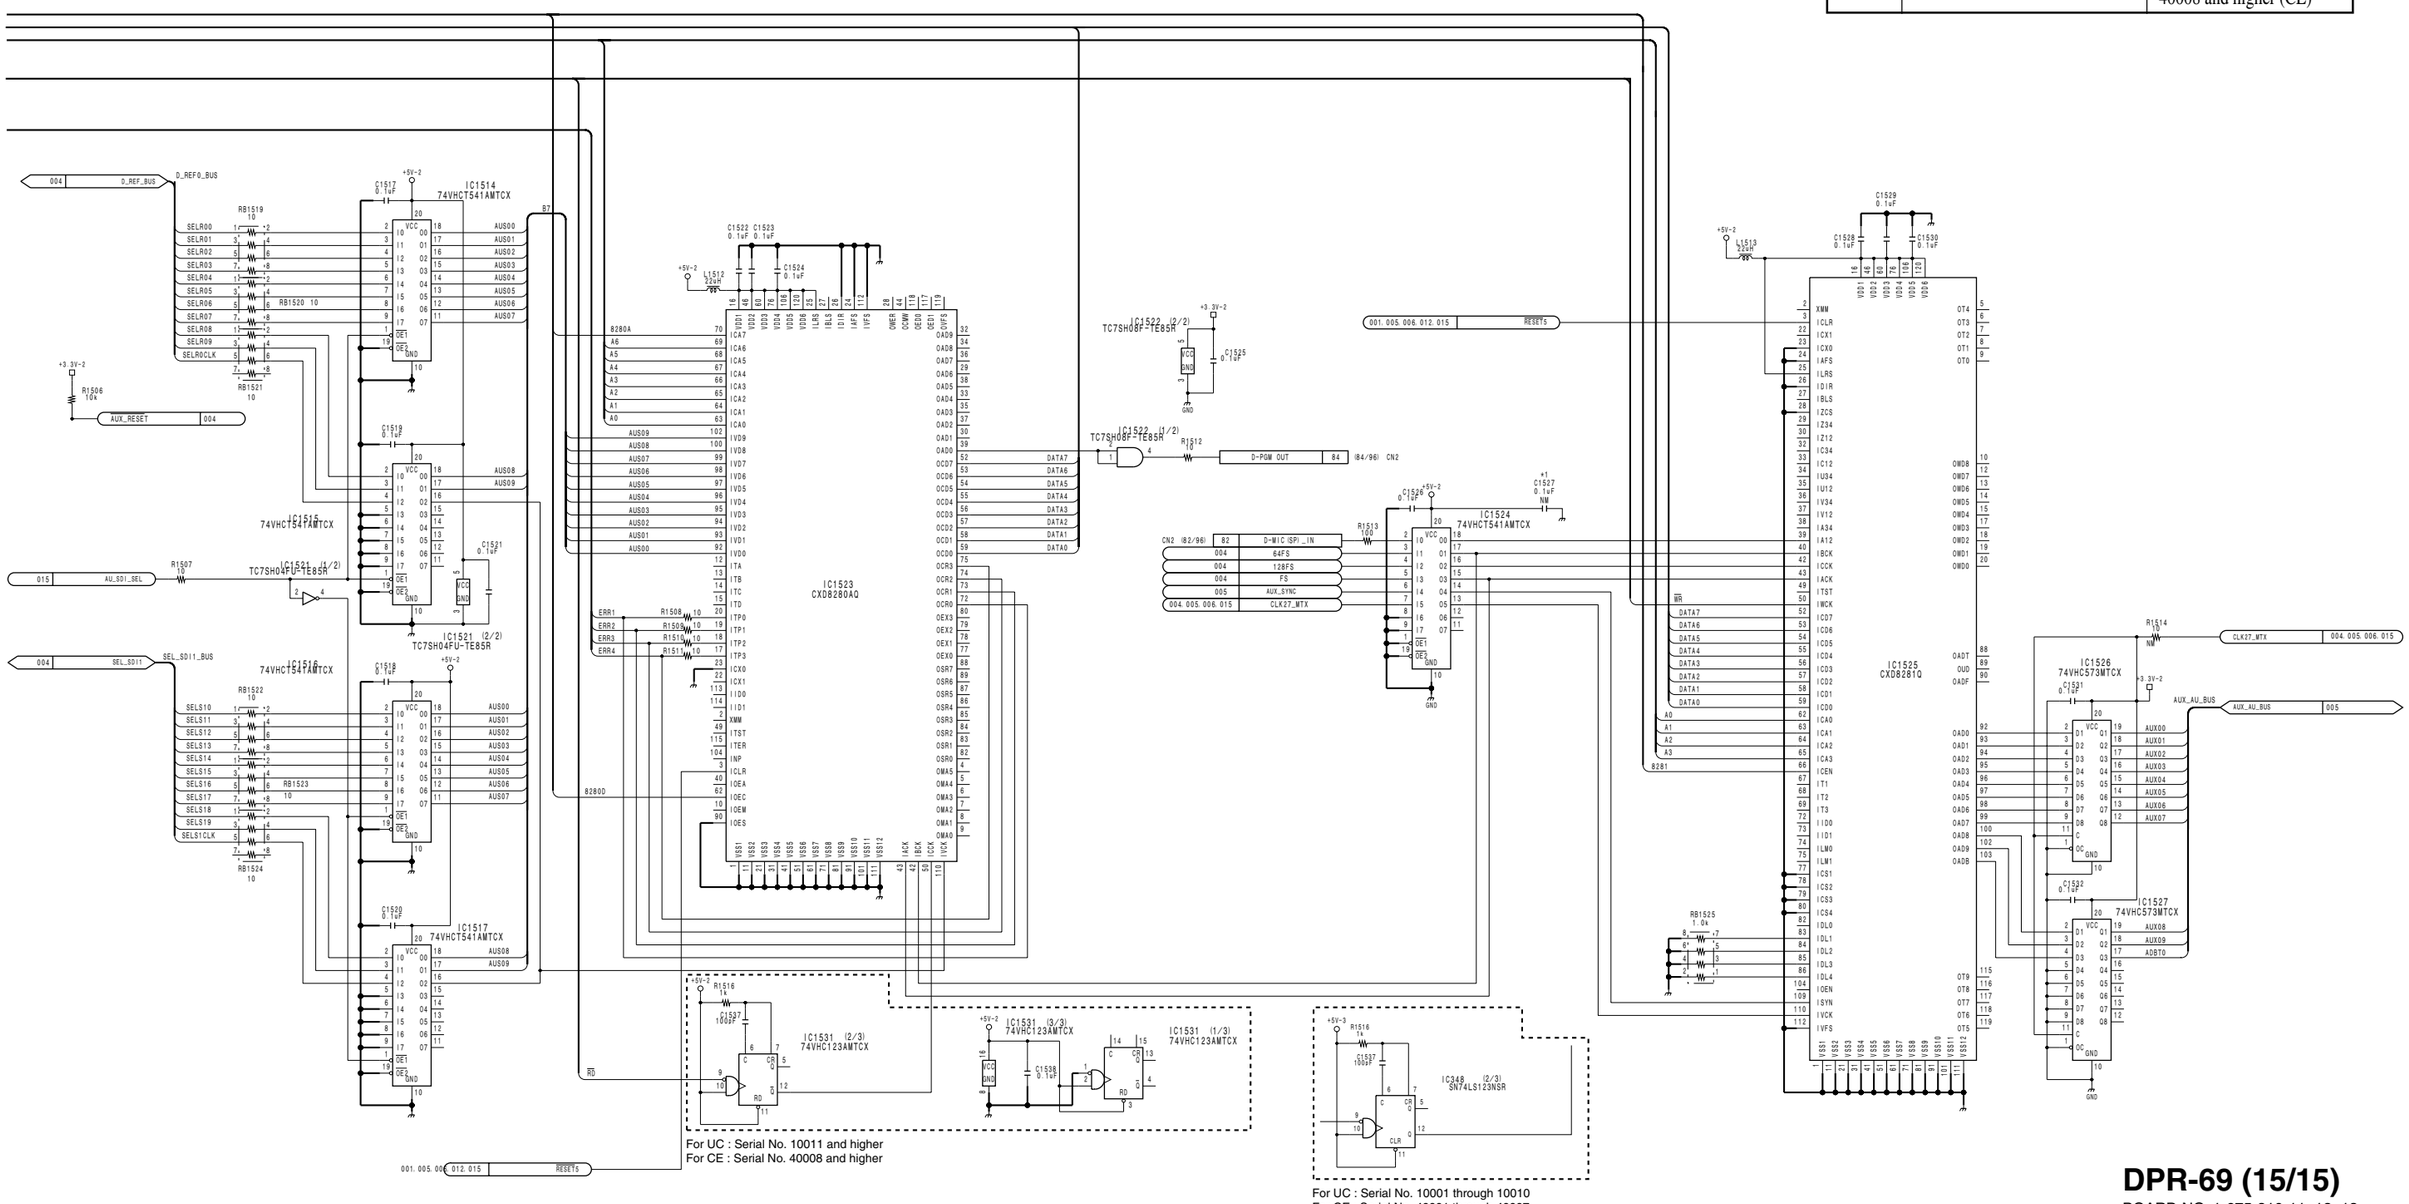

DPR-69 (15/15)

BOARD NO. 1-675-810-11, 12, 13
LOT NO. 912-

CCU-900_DPR-69_012_15

CCU-900 (UC) : S/N 10001 and Higher
CCU-900 (J) : S/N 30001 and Higher
CCU-900P (CE) : S/N 40001 and Higher

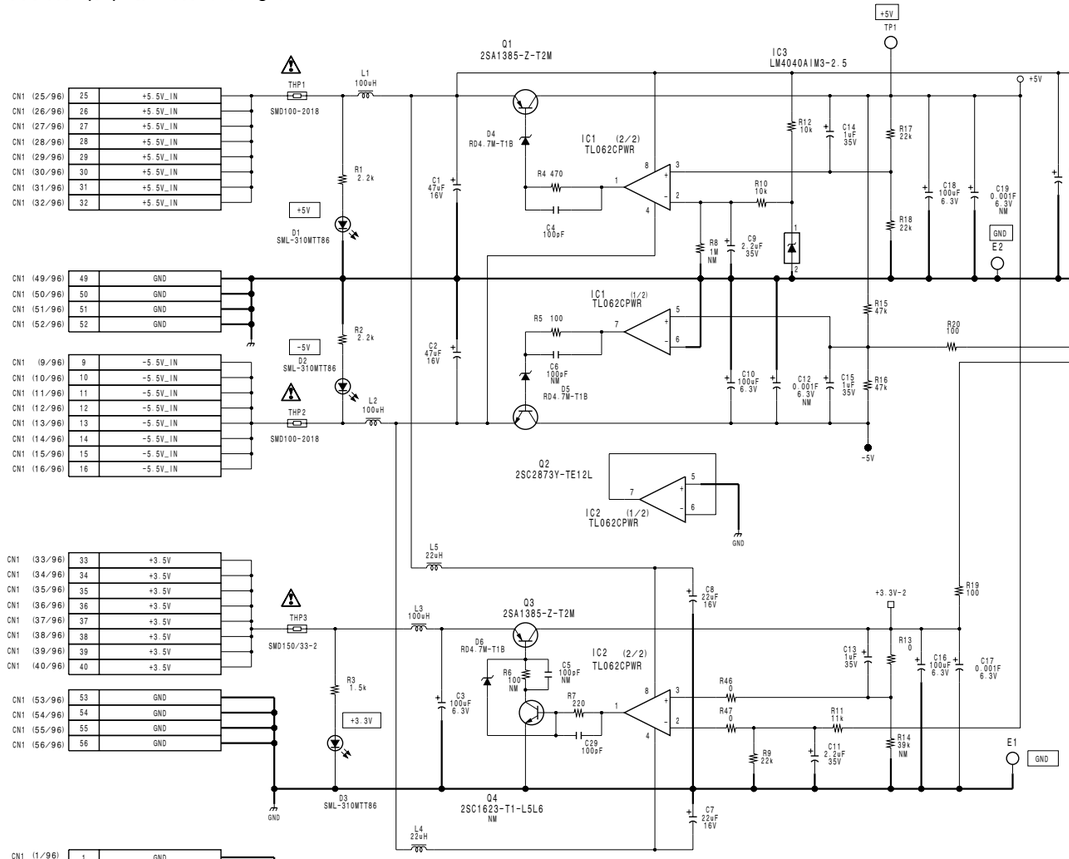

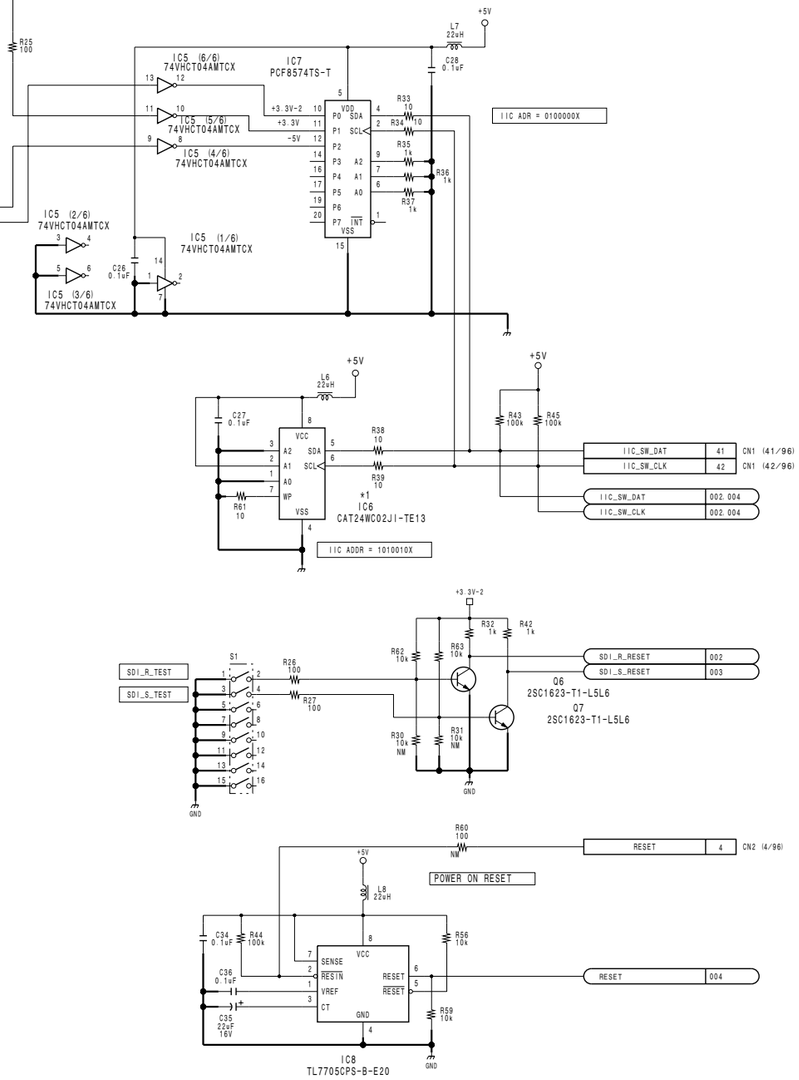

MARK	CHANGED INFORMATION	SERIAL No.
*1	IC6 CAT24WC02J-TE13 →CAT24WC02JI-TE13	10022 and higher (UC) 30004 and higher (J) 40045 and higher (CE)

SDI-31 (1/4)
BOARD NO. 1-677-923-11
LOT NO. 912-
CCU-900_SDI-31_012_1

SDI-31 (2/4)

CCU-900 (UC) : S/N 10001 and Higher
CCU-900 (J) : S/N 30001 and Higher
CCU-900P (CE) : S/N 40001 and Higher

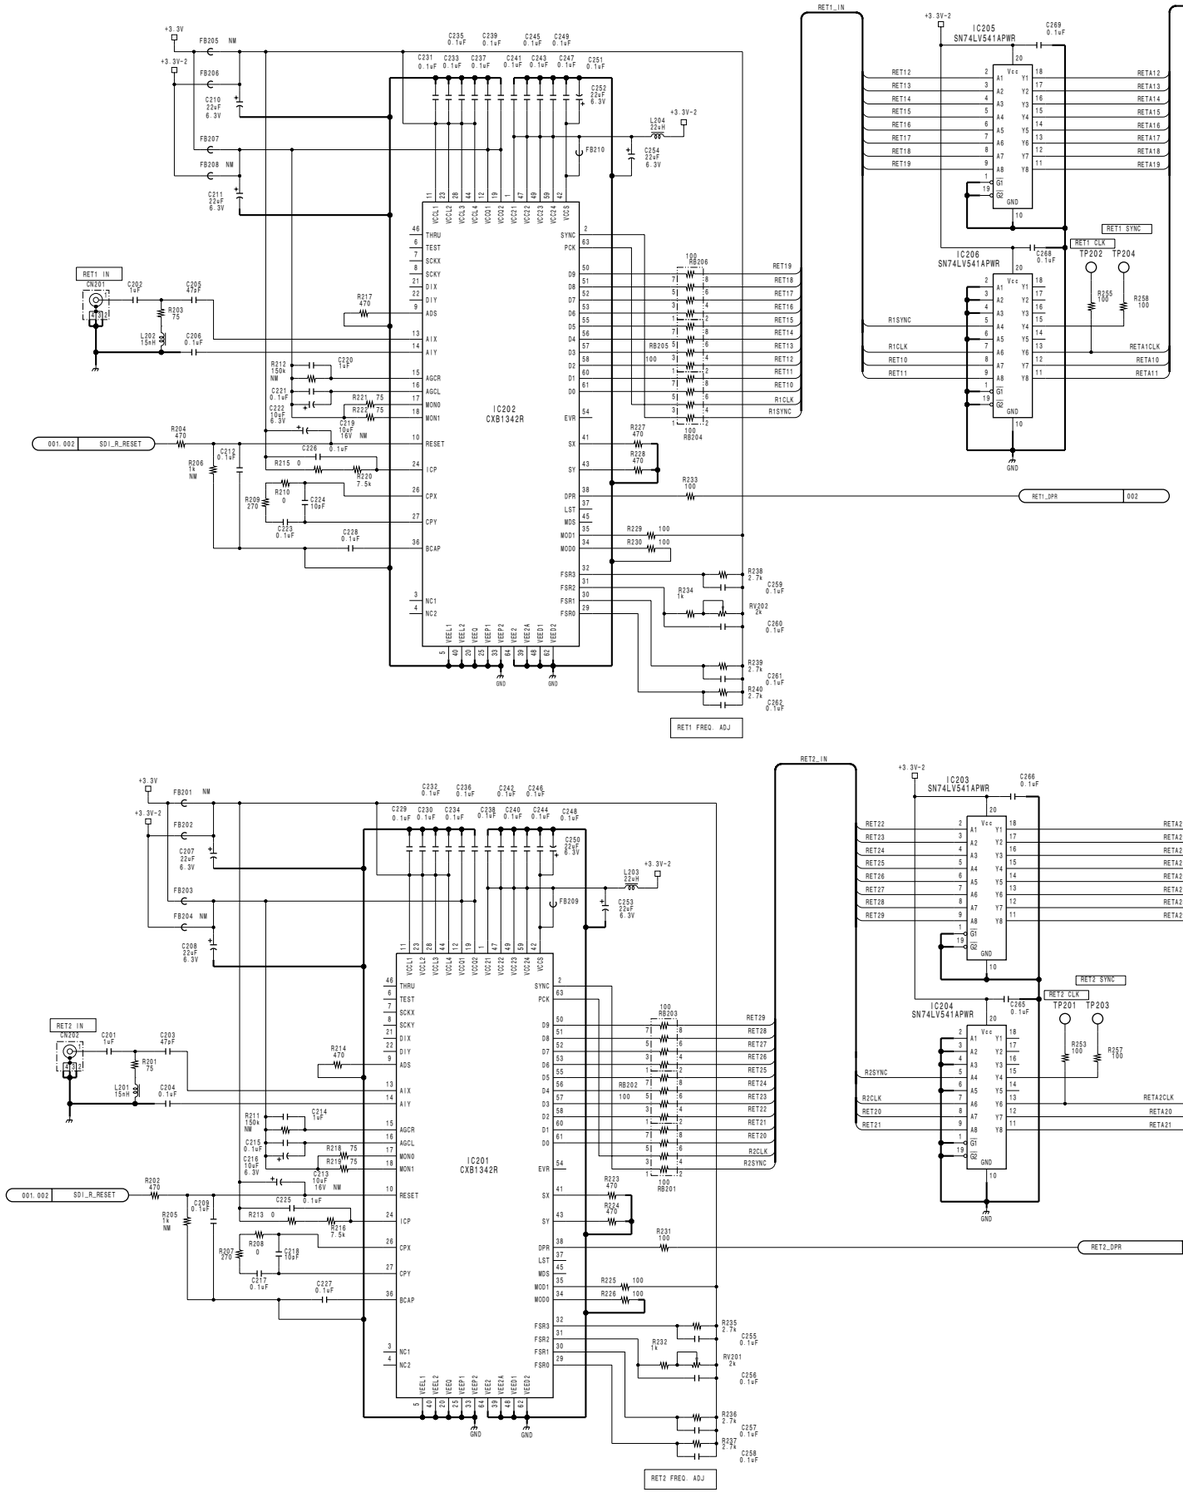

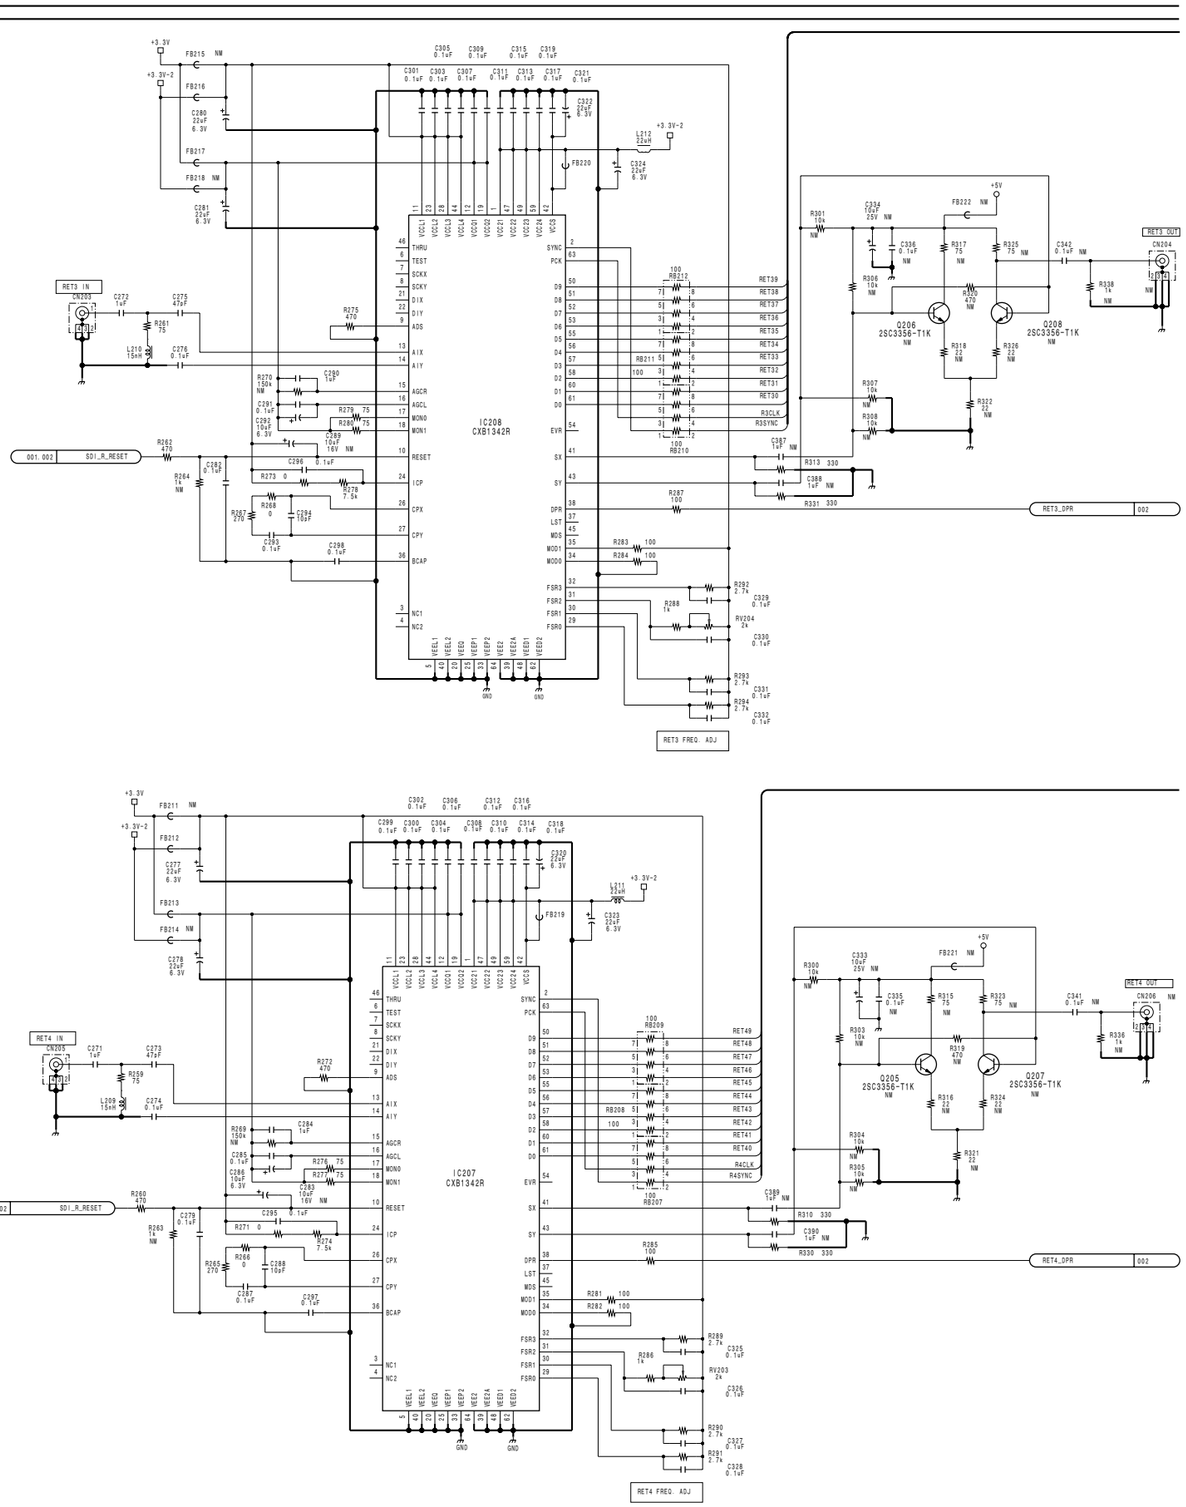

4-26

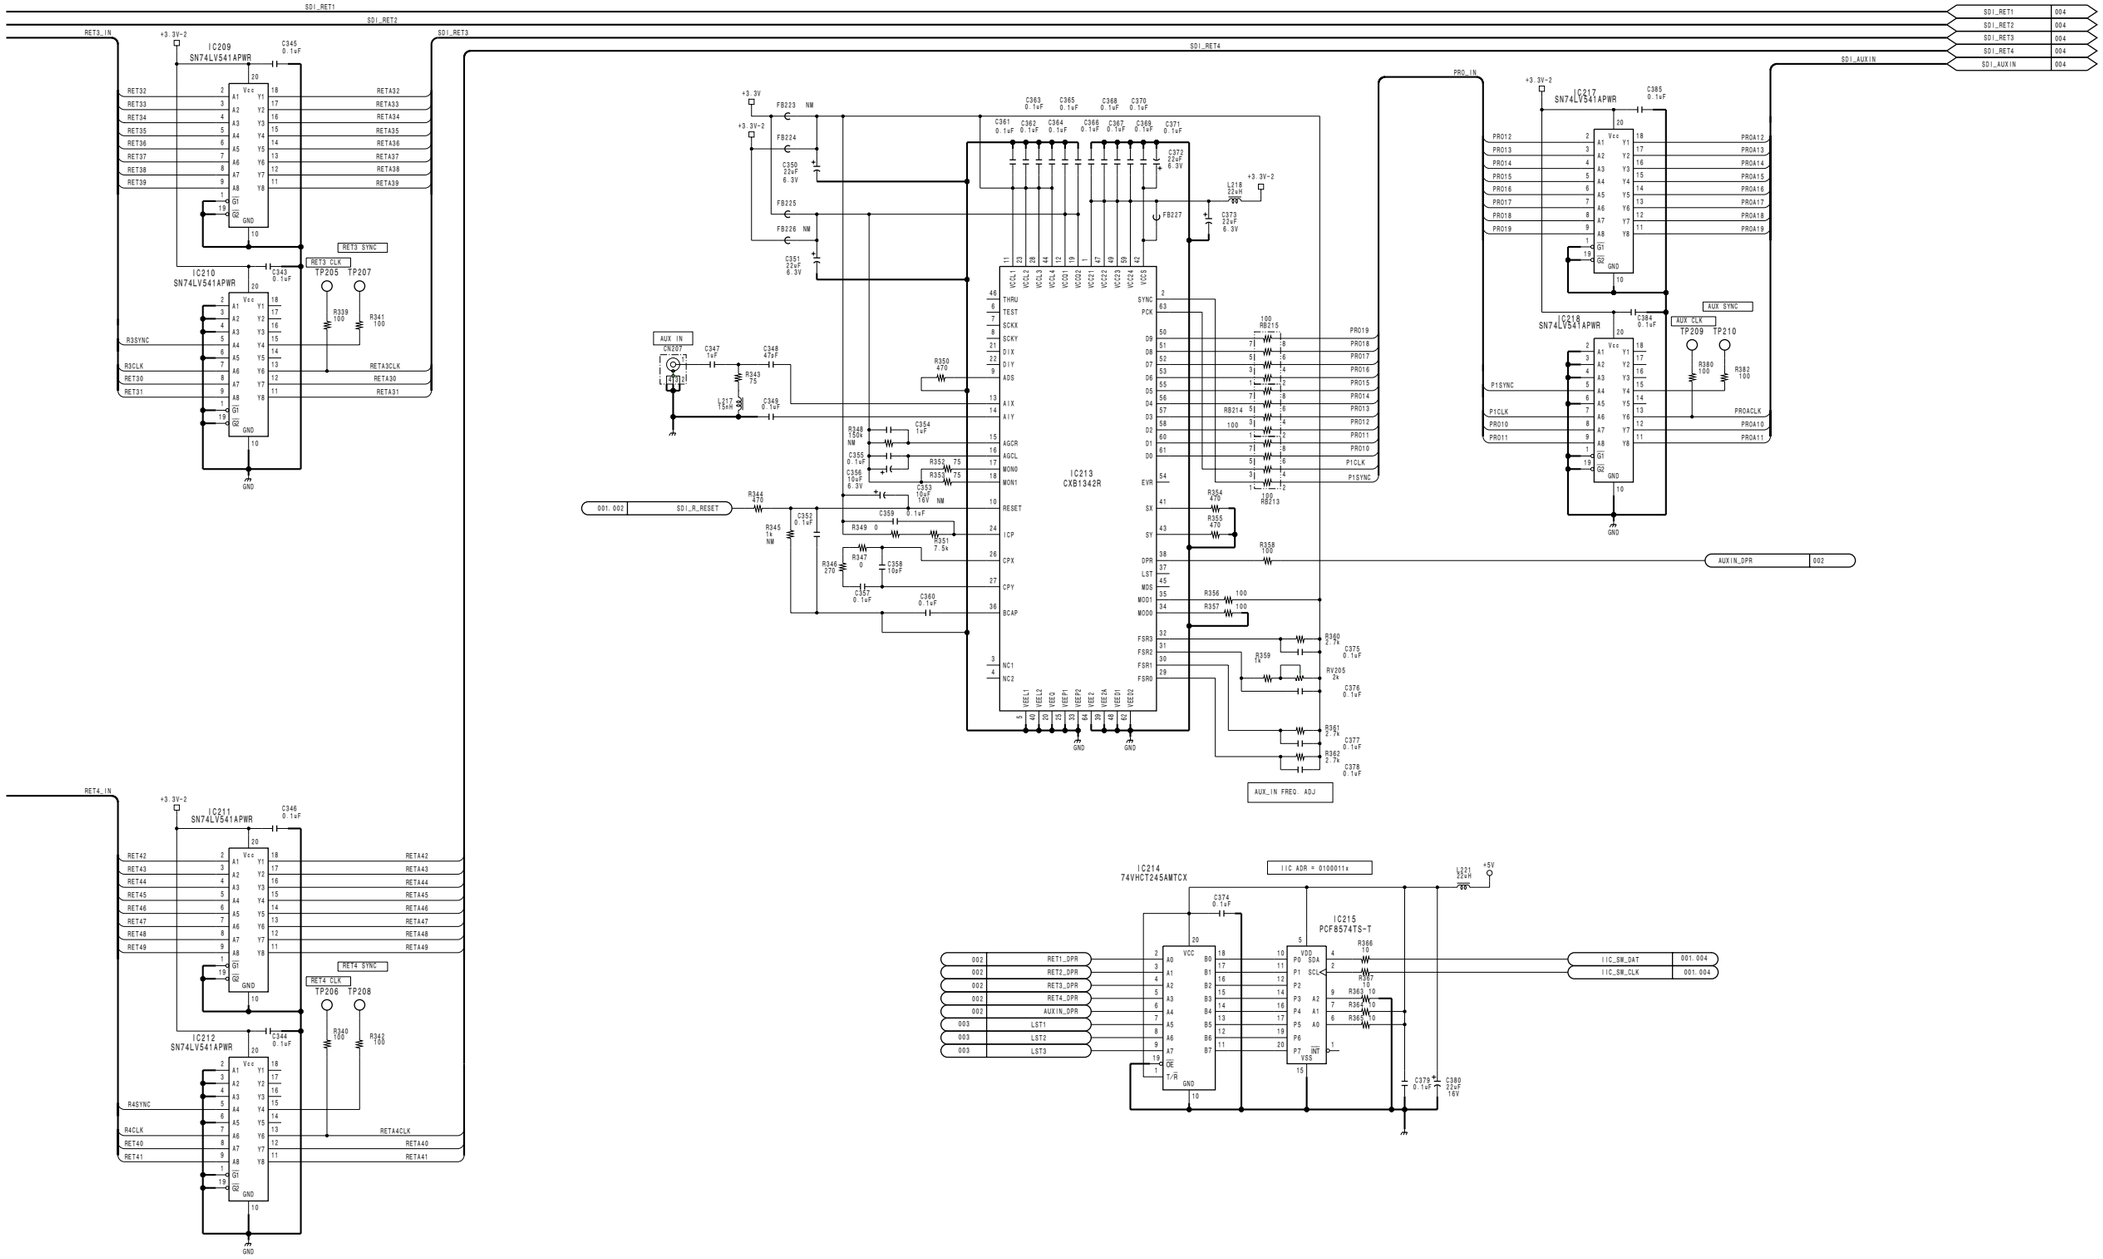

SDI-31 (2/4)
BOARD NO. 1-677-923-11
LOT NO. 912-
CCU-900_SDI-31_012_2

CCU-900 (UC) : S/N 10001 and Higher
CCU-900 (J) : S/N 30001 and Higher
CCU-900P (CE) : S/N 40001 and Higher

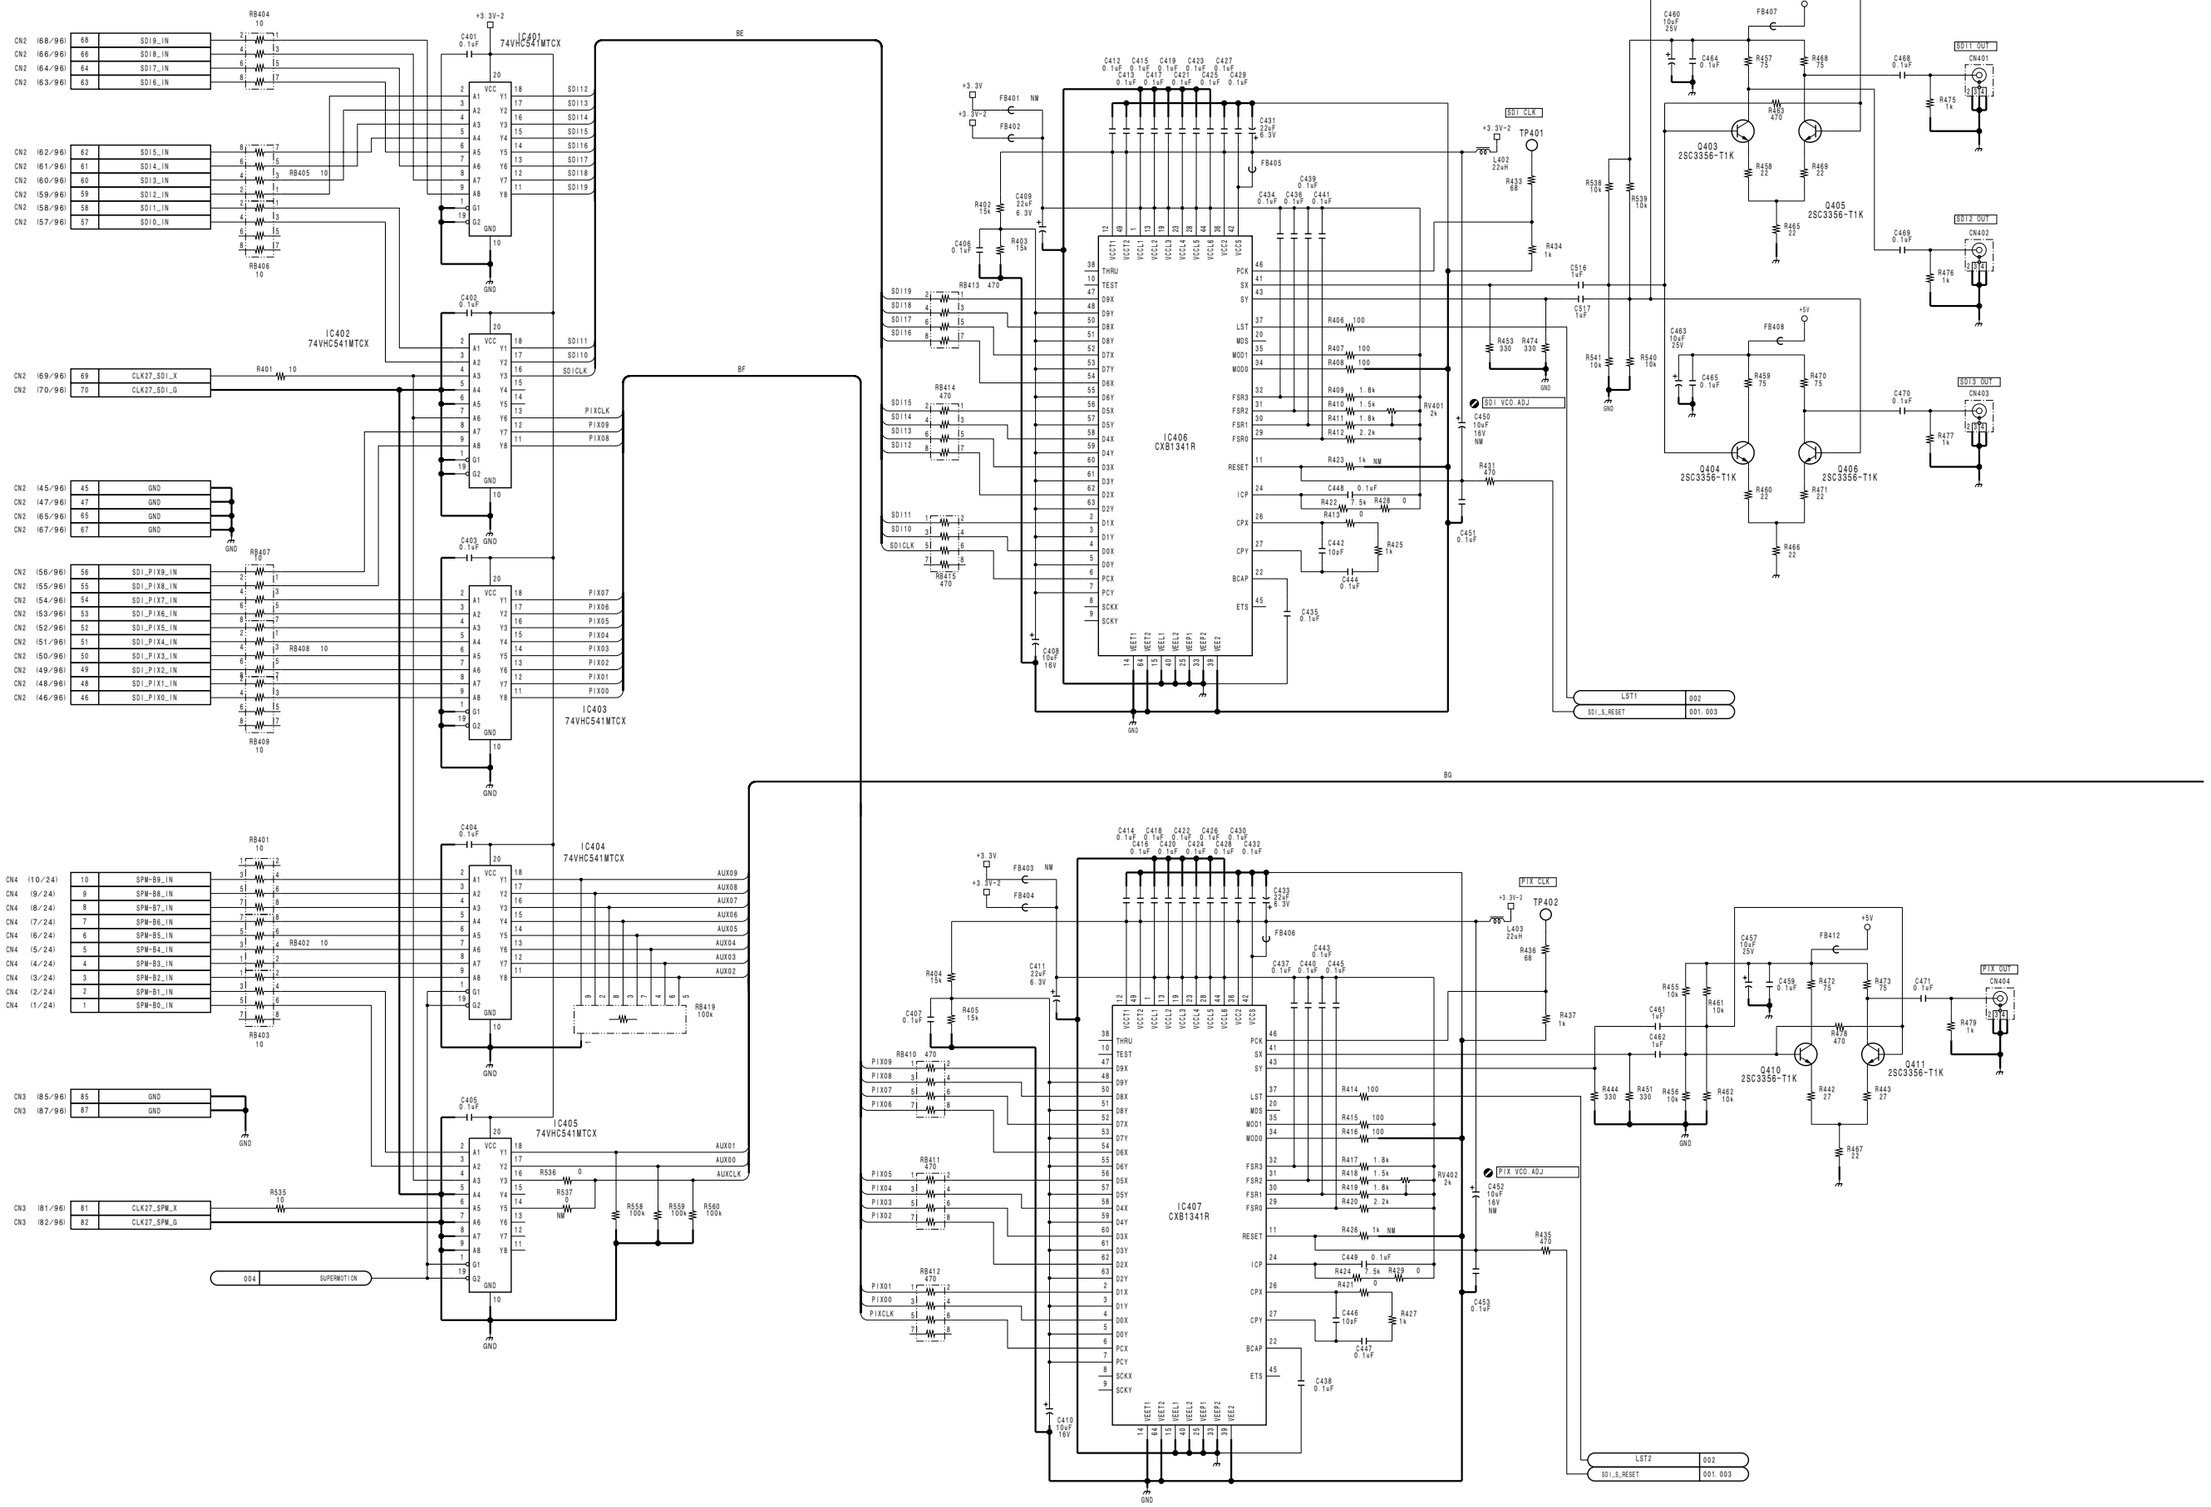

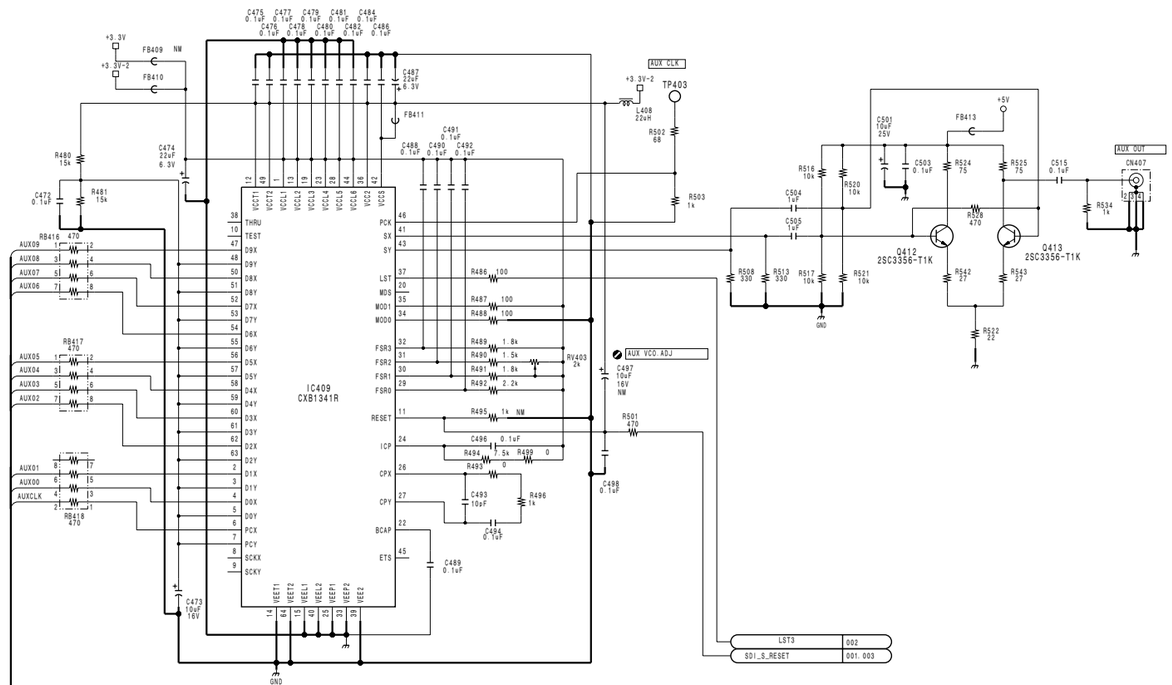

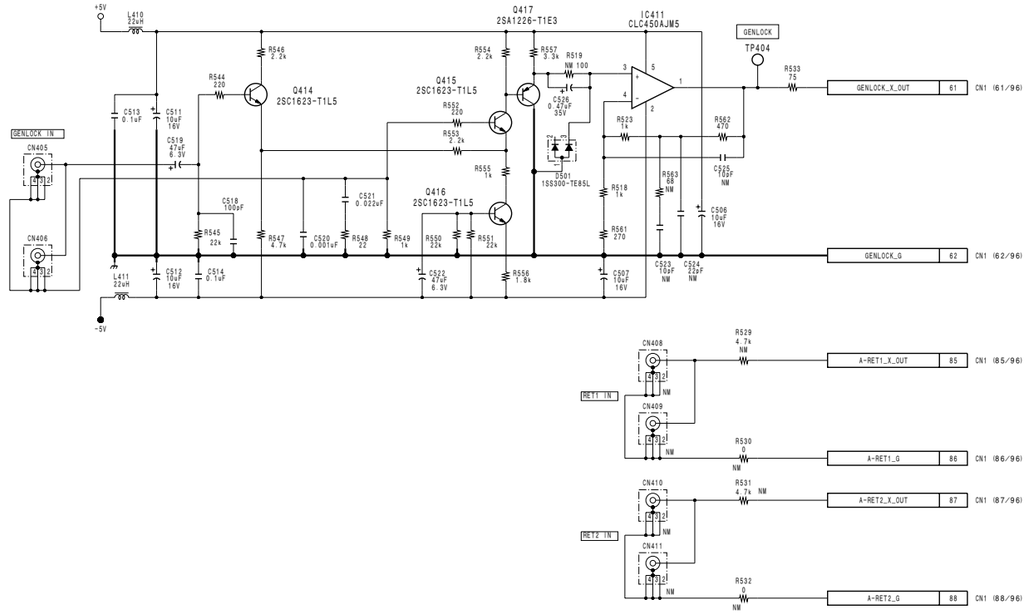

SDI-31 (3/4)

BOARD NO. 1-677-923-11
LOT NO. 912-
CCU-900_SDI-31_012_3

CCU-900 (UC) : S/N 10001 and Higher
CCU-900 (J) : S/N 30001 and Higher
CCU-900P (CE) : S/N 40001 and Higher

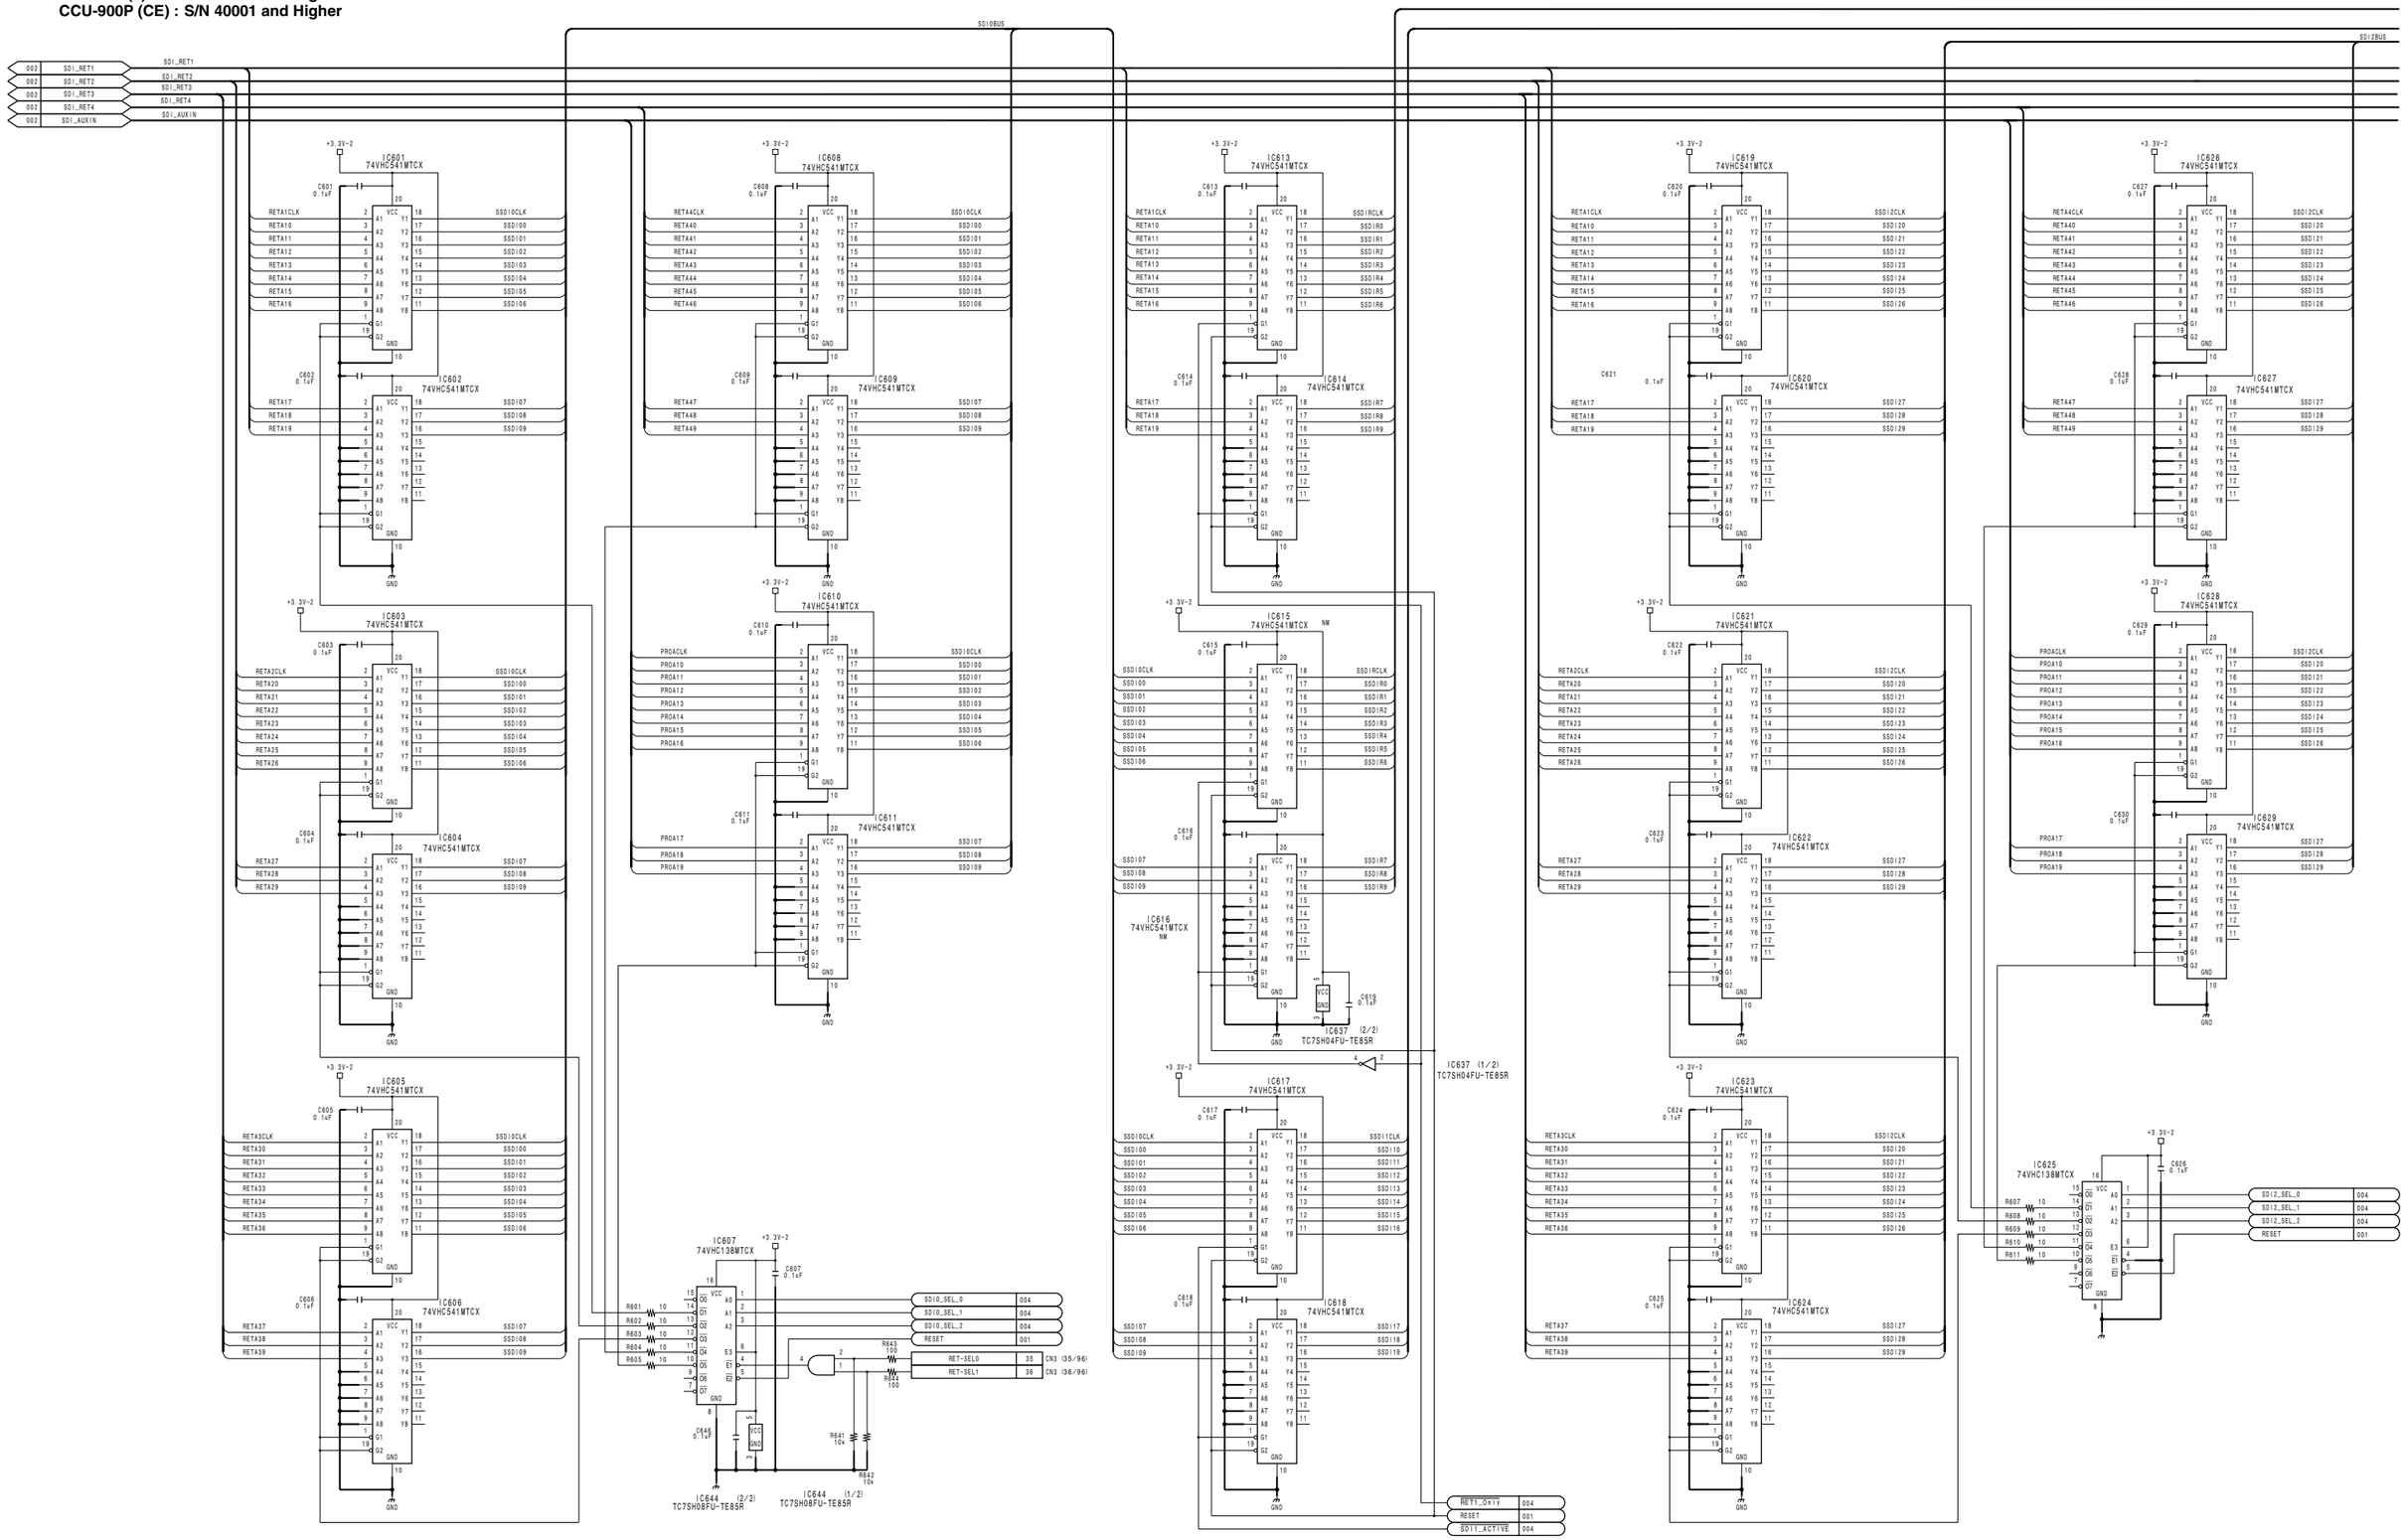

SDI-31 (4/4)

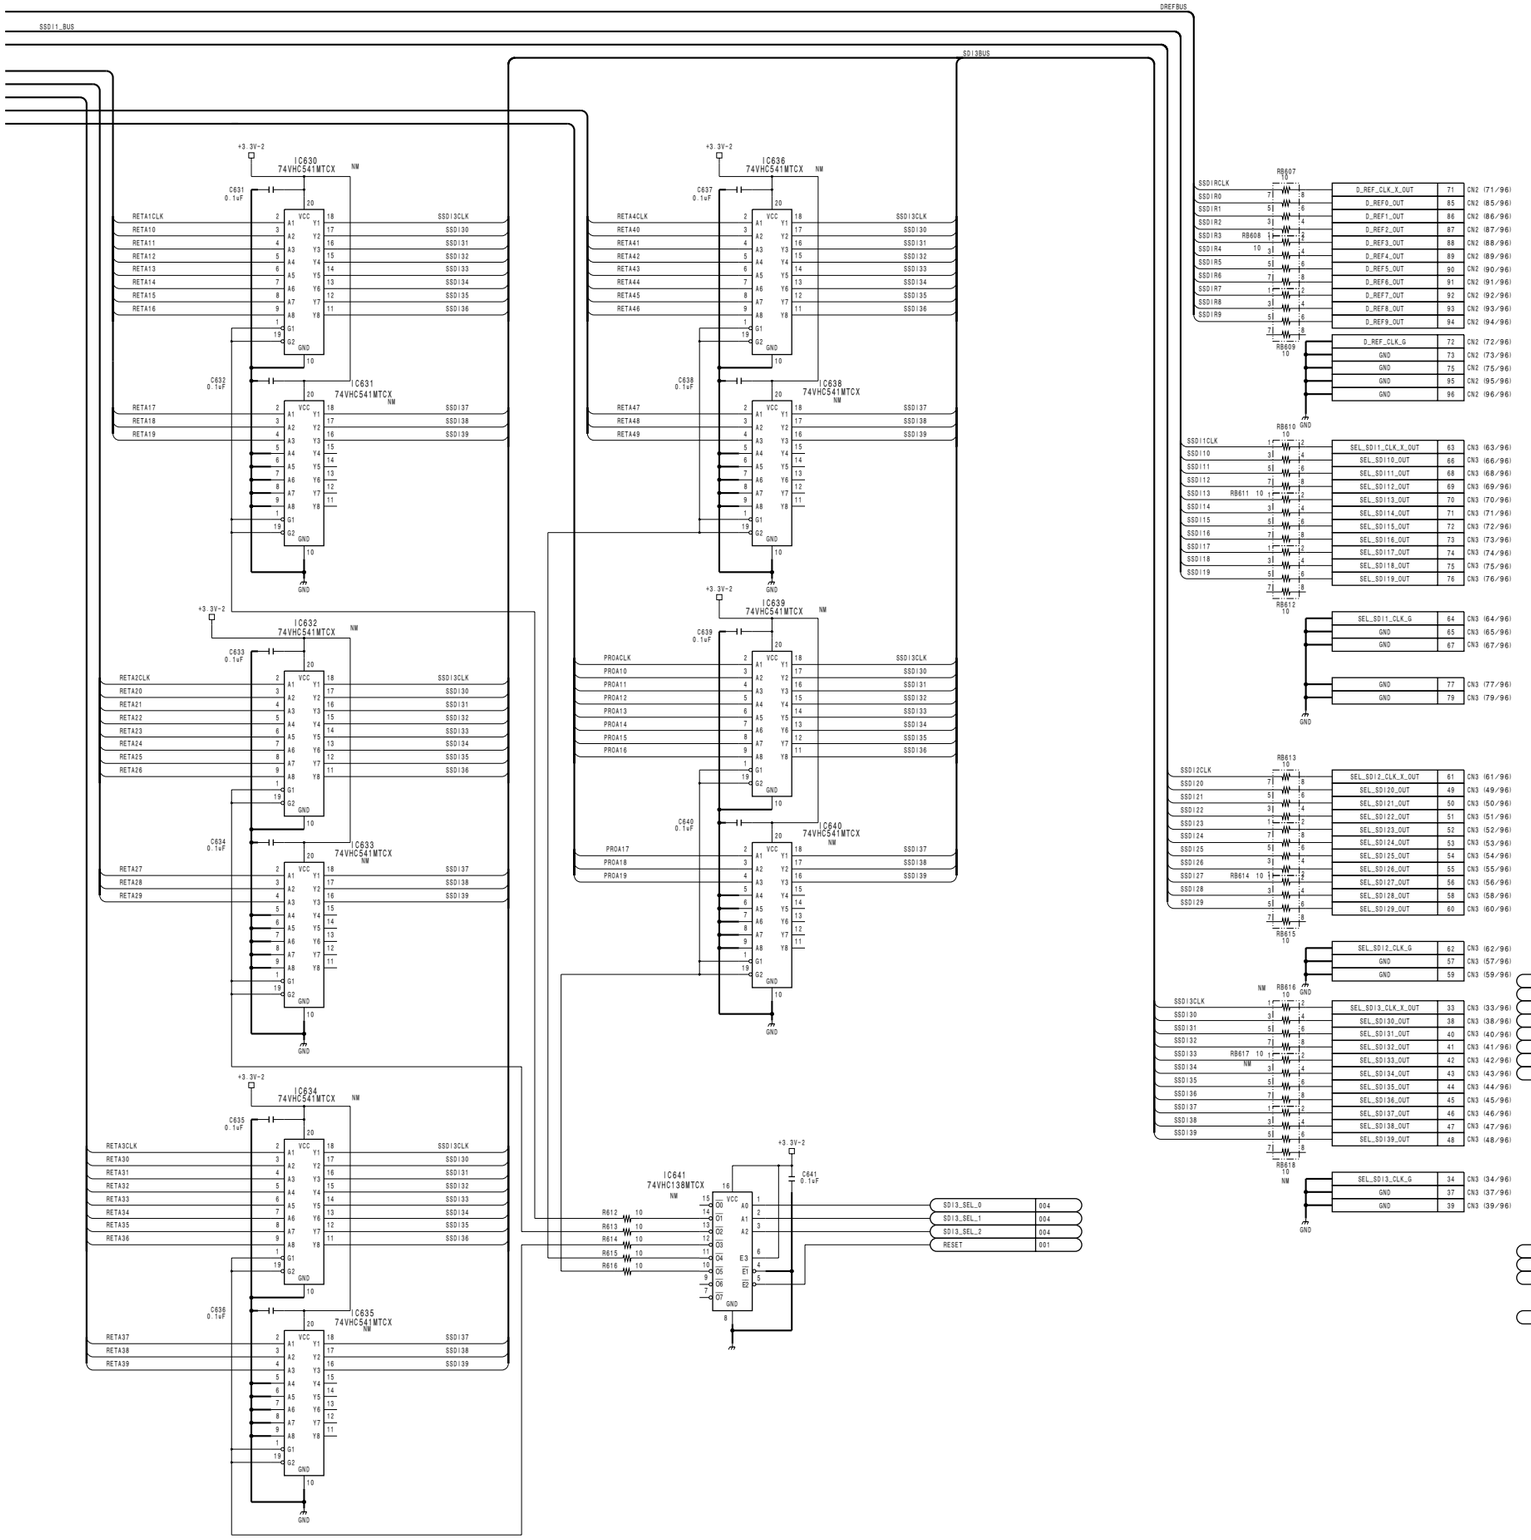

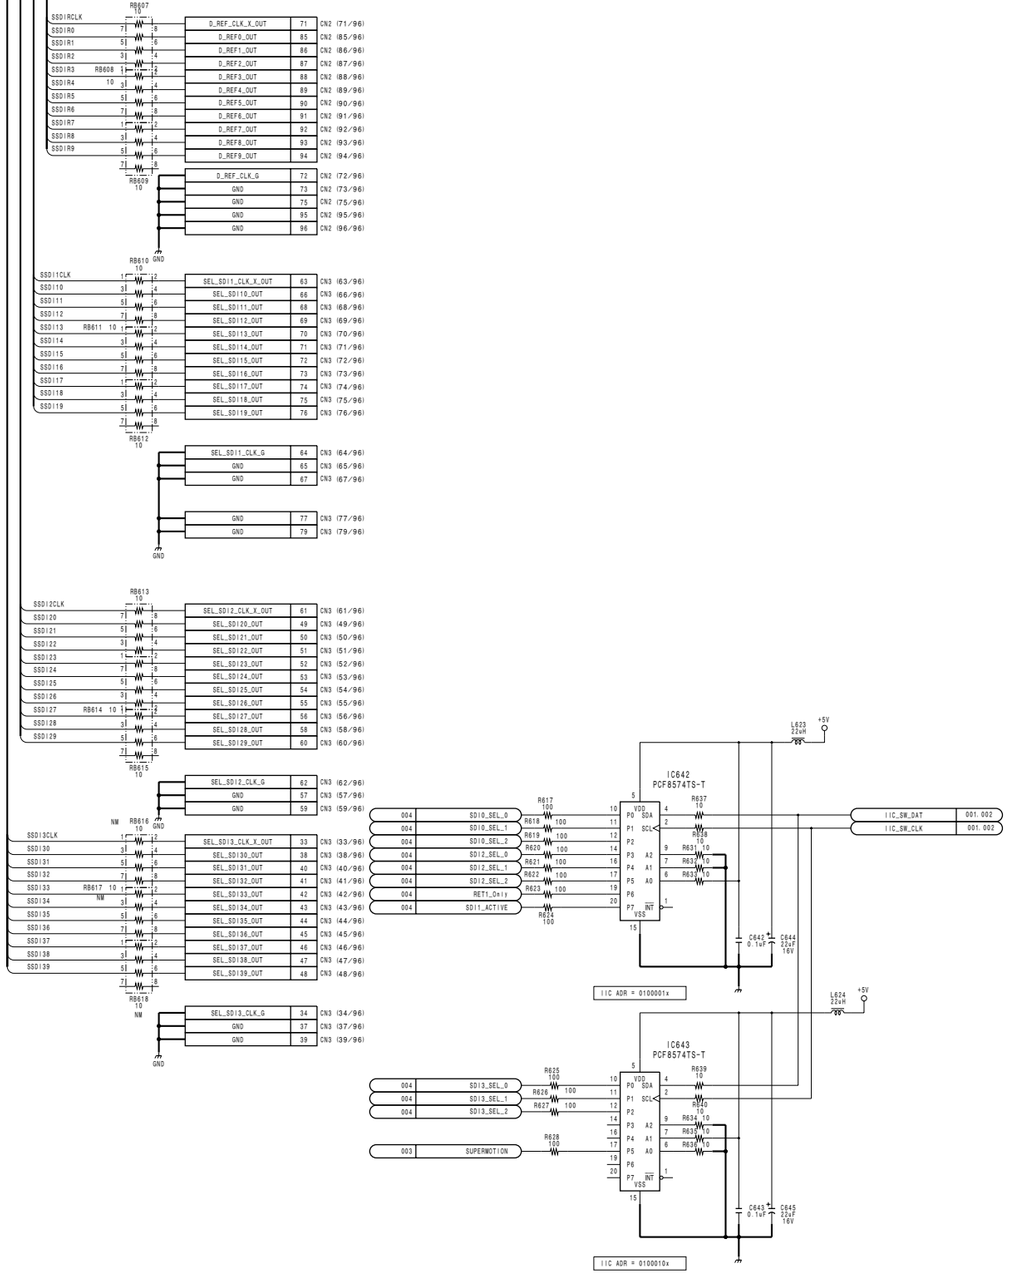

SDI-31 (4/4)

BOARD NO. 1-677-923-11
LOT NO. 912-
CCU-900_SDI-31_012_4

CCU-900 (UC) : S/N 10001 and Higher
CCU-900 (J) : S/N 30001 and Higher
CCU-900P (CE) : S/N 40001 and Higher

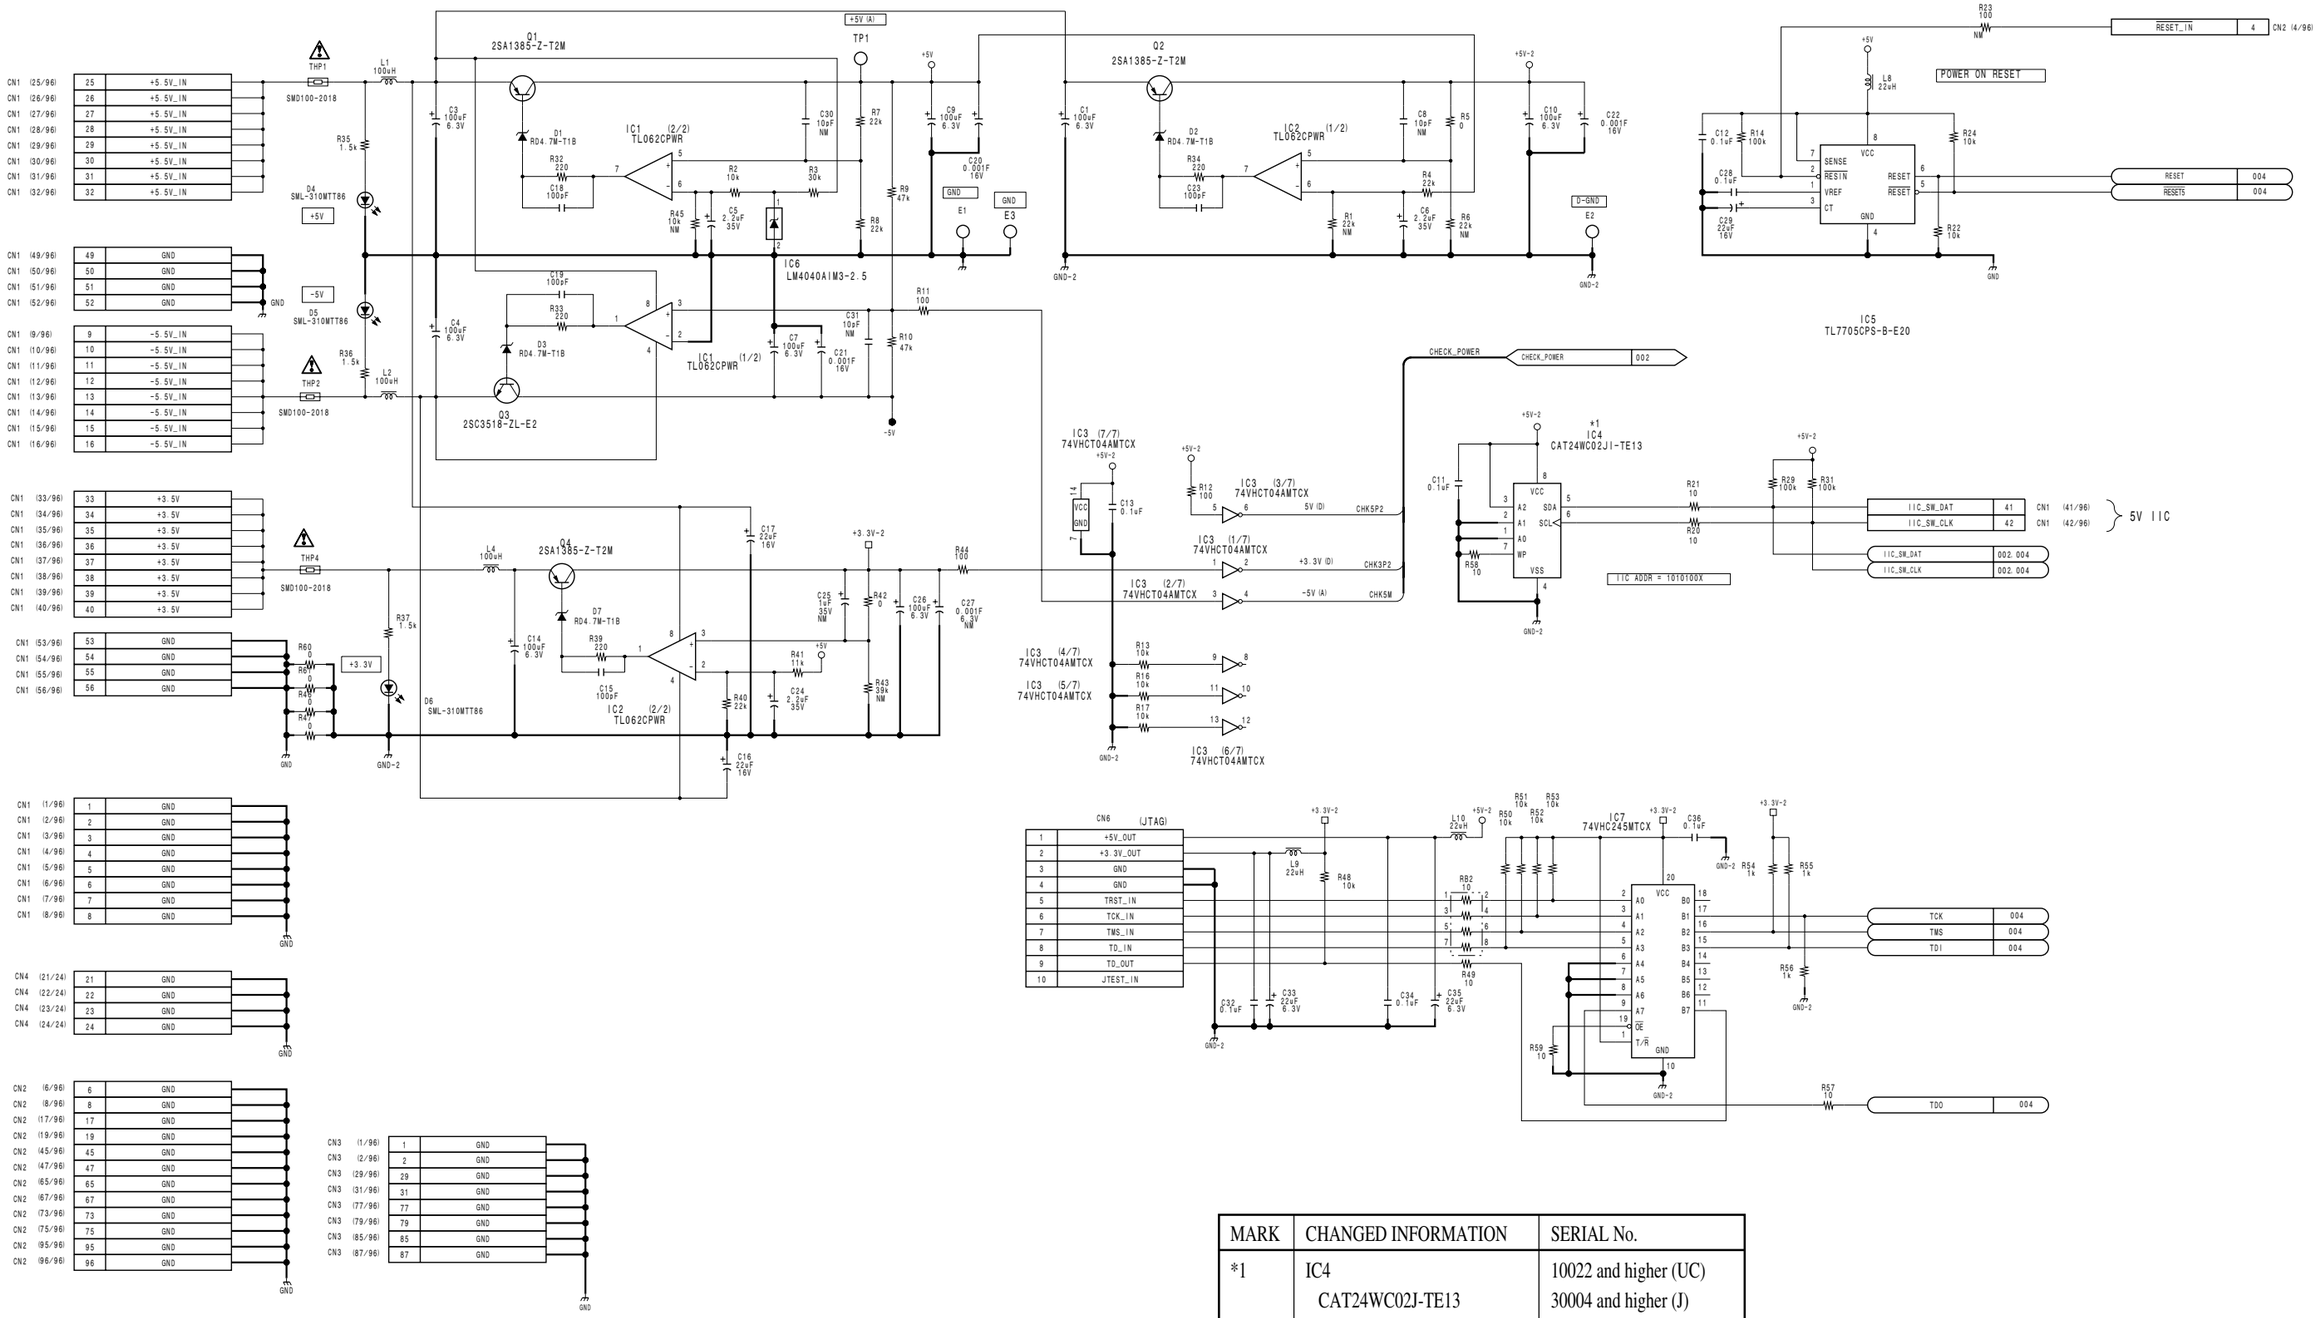

MARK	CHANGED INFORMATION	SERIAL No.
*1	IC4 CAT24WC02J-TE13 →CAT24WC02JI-TE13	10022 and higher (UC) 30004 and higher (J) 40045 and higher (CE)

IF-730 (1/4)
BOARD NO. 1-675-811-12
LOT NO. 912-
CCU-900_IF-730_013_1

CCU-900 (UC) : S/N 10001 and Higher
CCU-900 (J) : S/N 30001 and Higher
CCU-900P (CE) : S/N 40001 and Higher

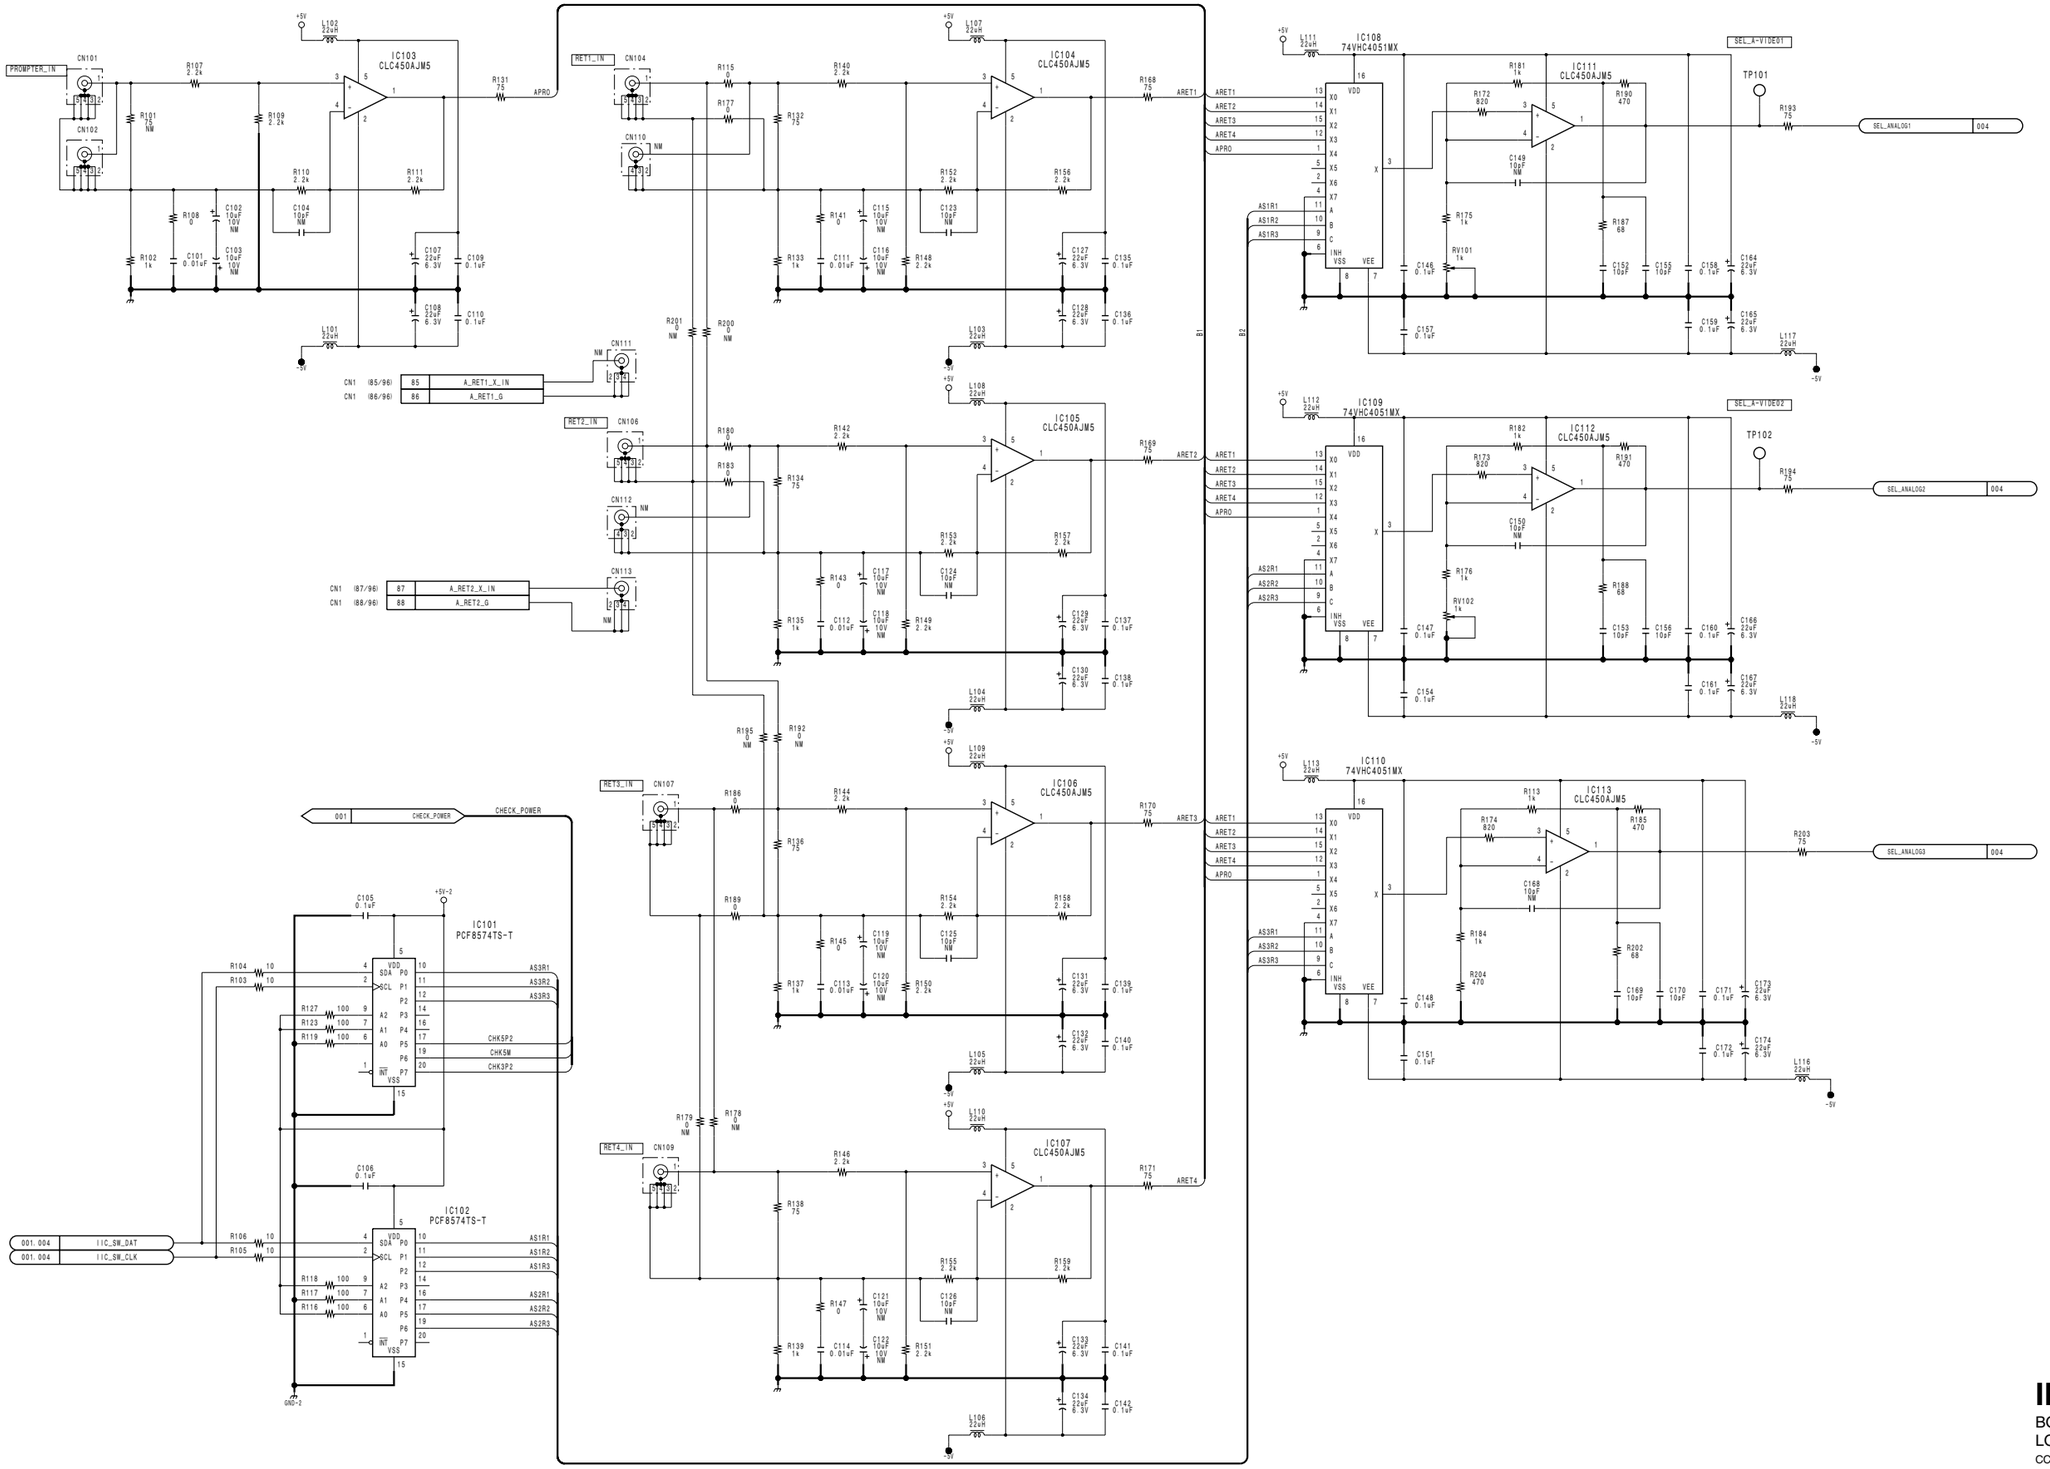

IF-730 (2/4)

BOARD NO. 1-675-811-12
LOT NO. 912-
CCU-900_IF-730_013_2

IF-730 (3/4)

CCU-900 (UC) : S/N 10001 and Higher
CCU-900 (J) : S/N 30001 and Higher
CCU-900P (CE) : S/N 40001 and Higher

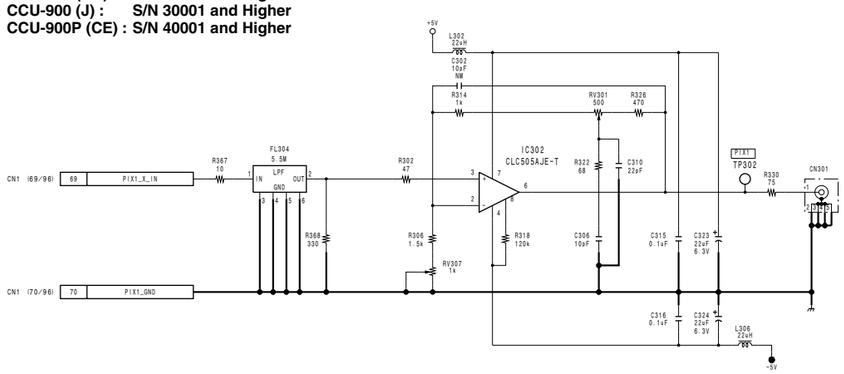

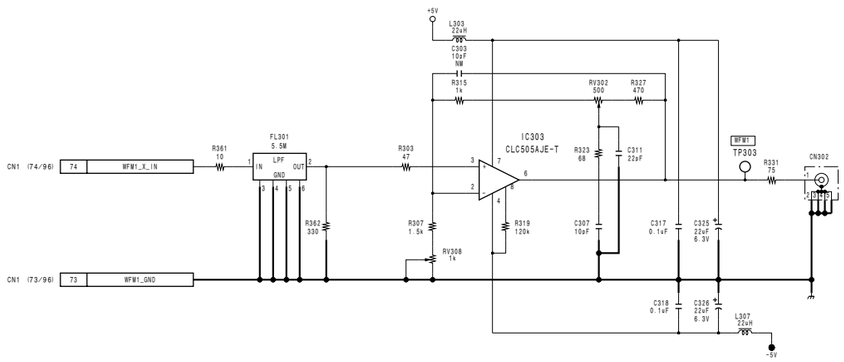

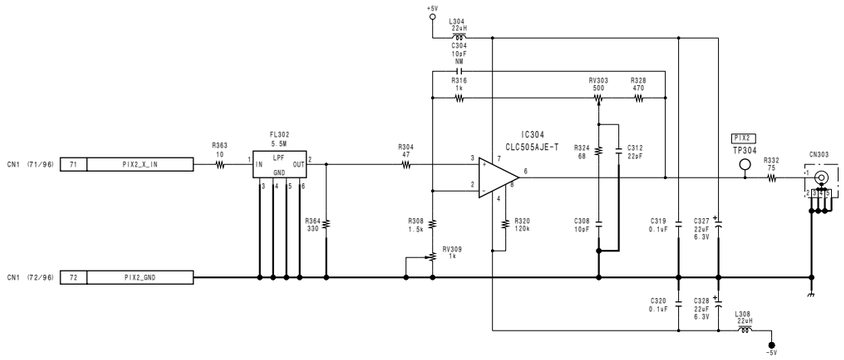

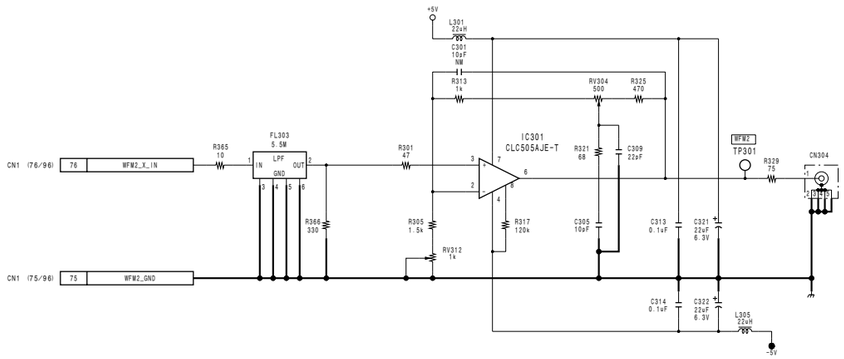

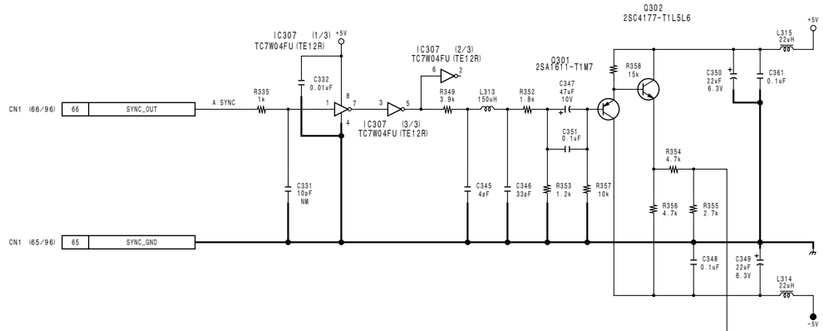

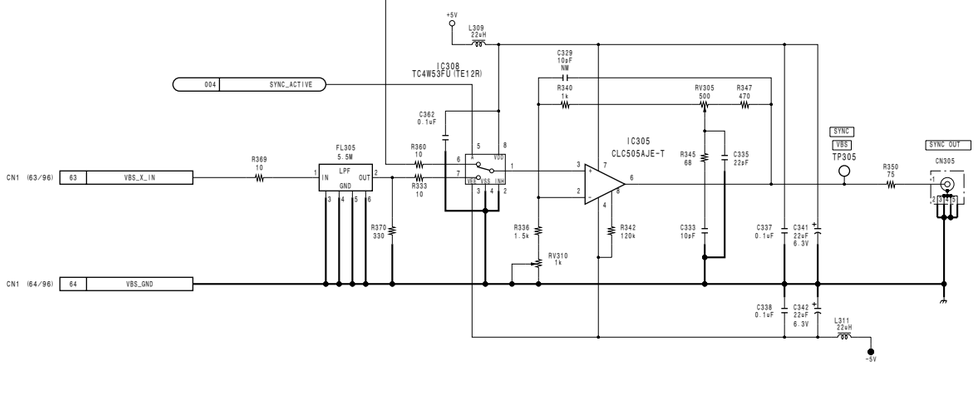

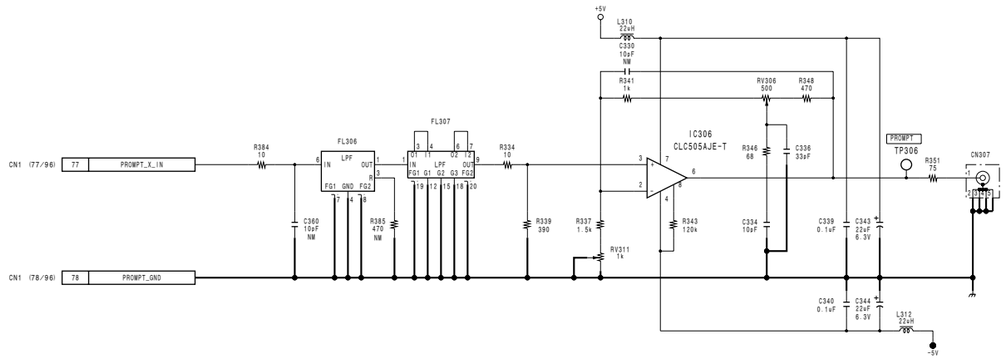

IF-730 (3/4)
BOARD NO. 1-675-811-12
LOT NO. 912-
CCU-900_IF-730_013_3

IF-730 (4/4)

CCU-900 (UC) : S/N 10001 and Higher
CCU-900 (J) : S/N 30001 and Higher
CCU-900P (CE) : S/N 40001 and Higher

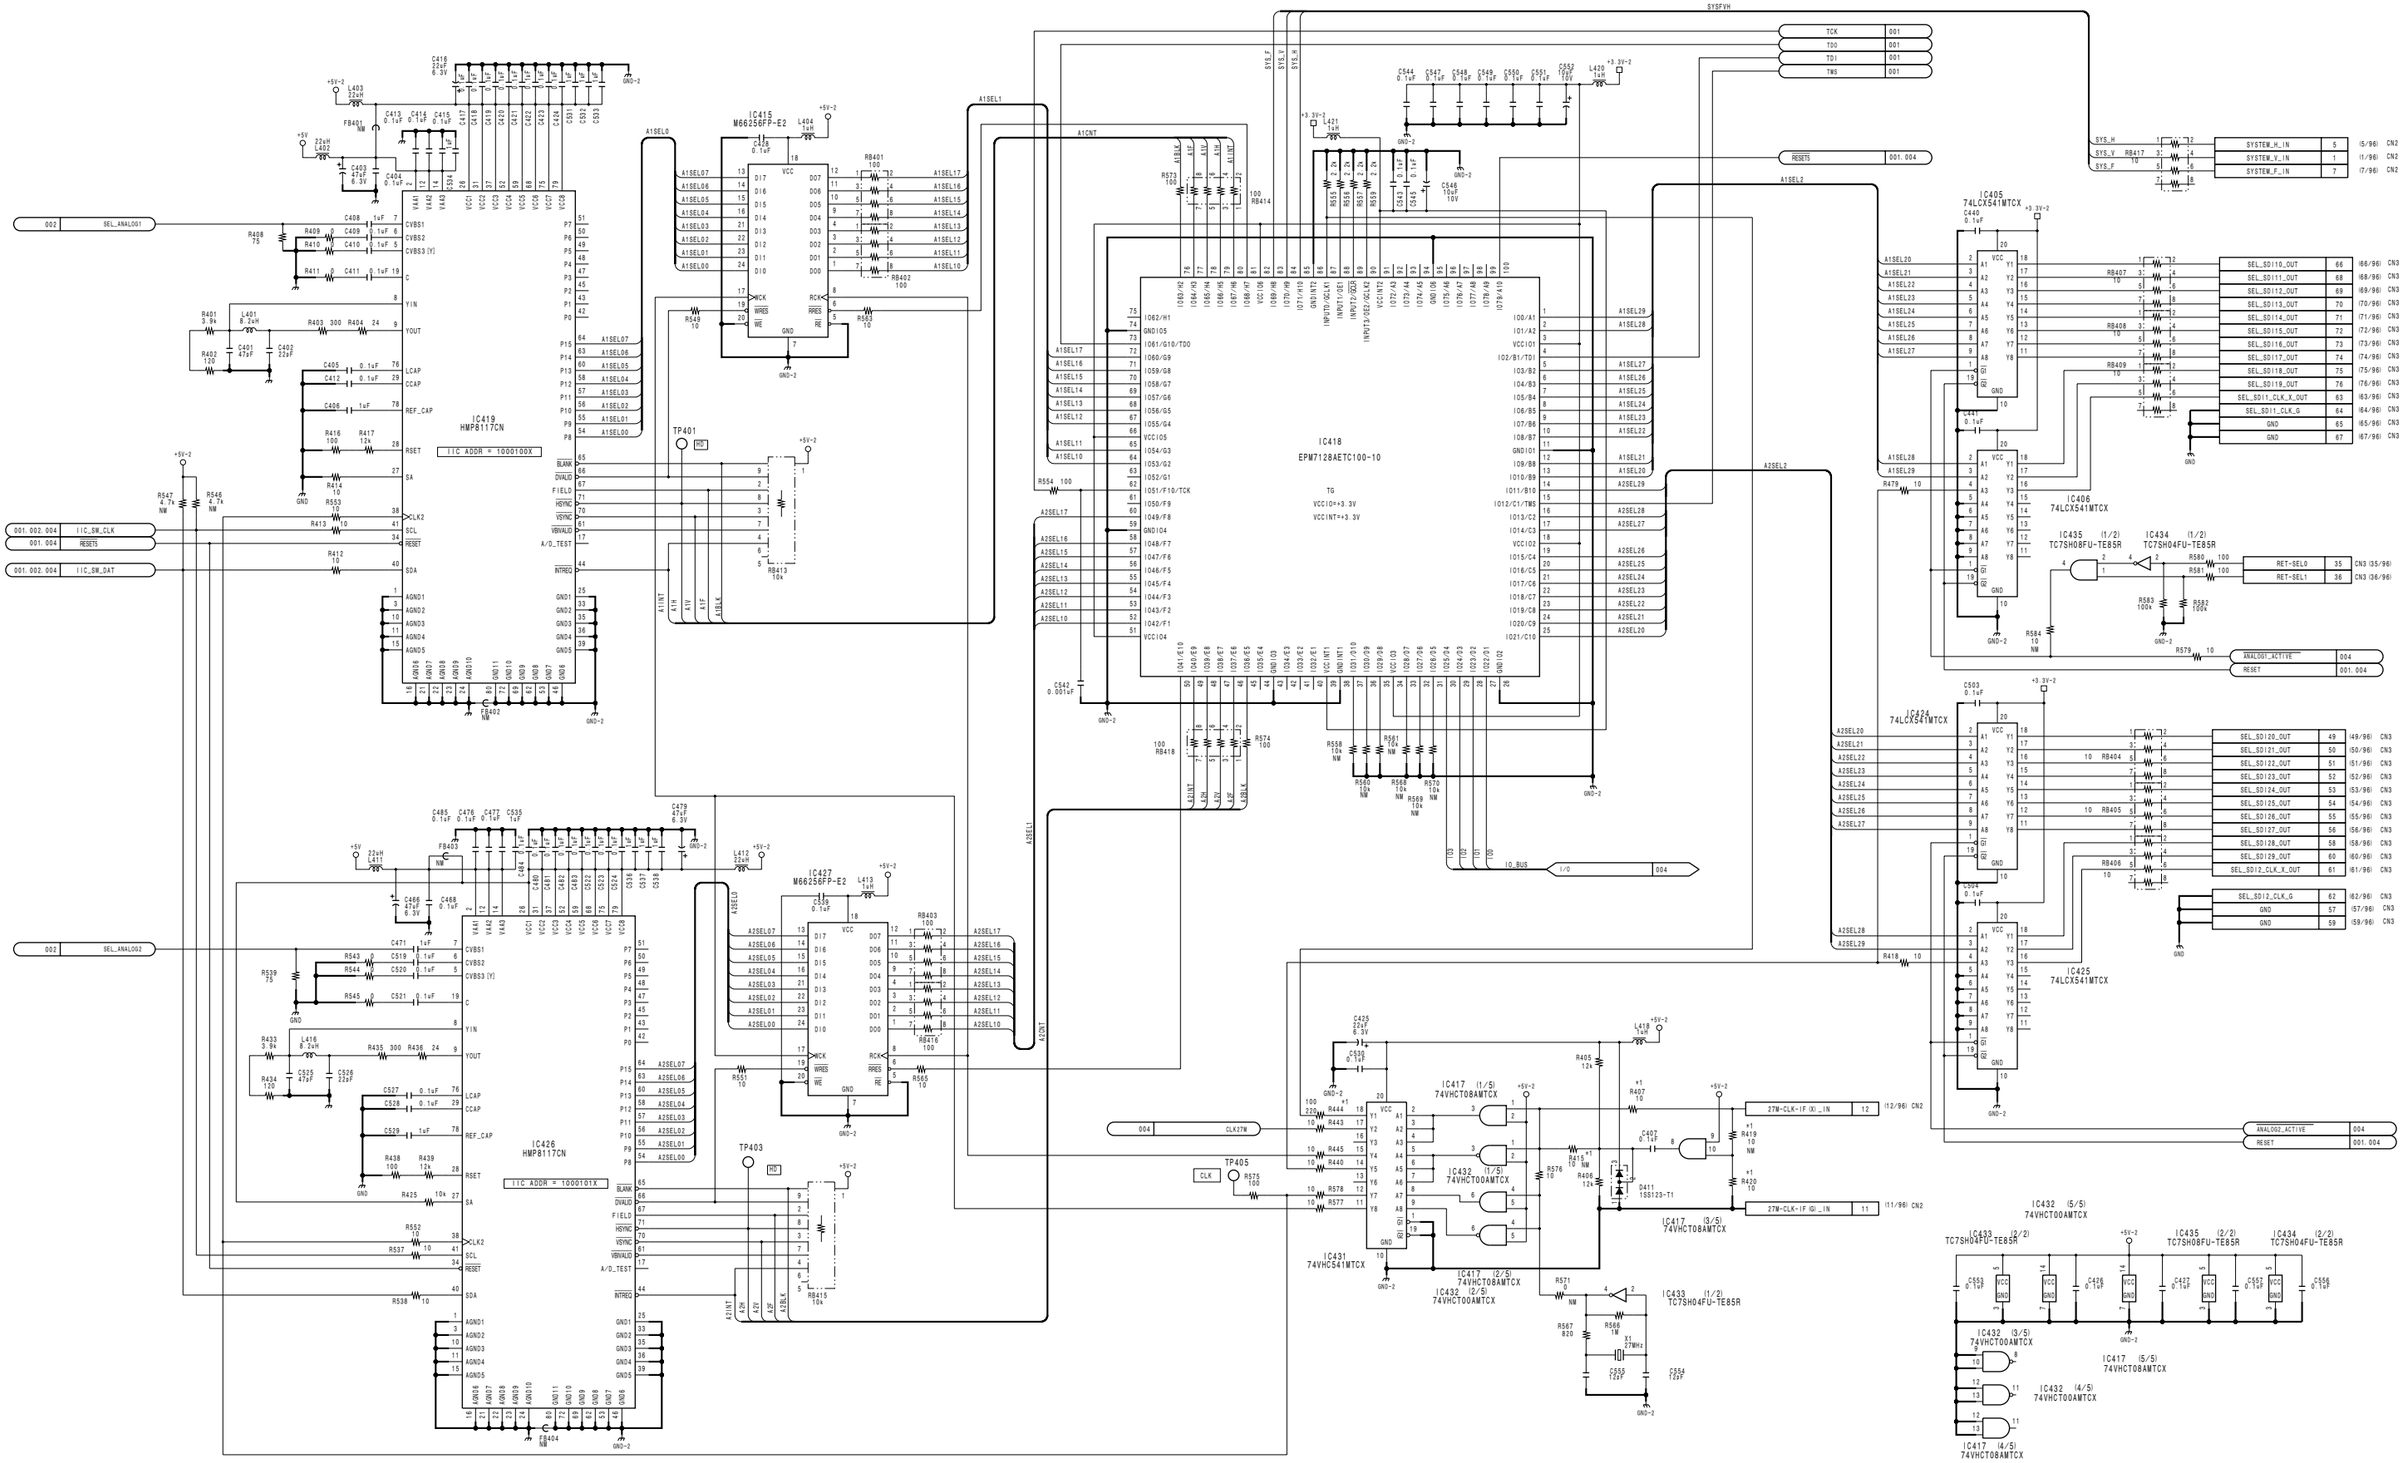

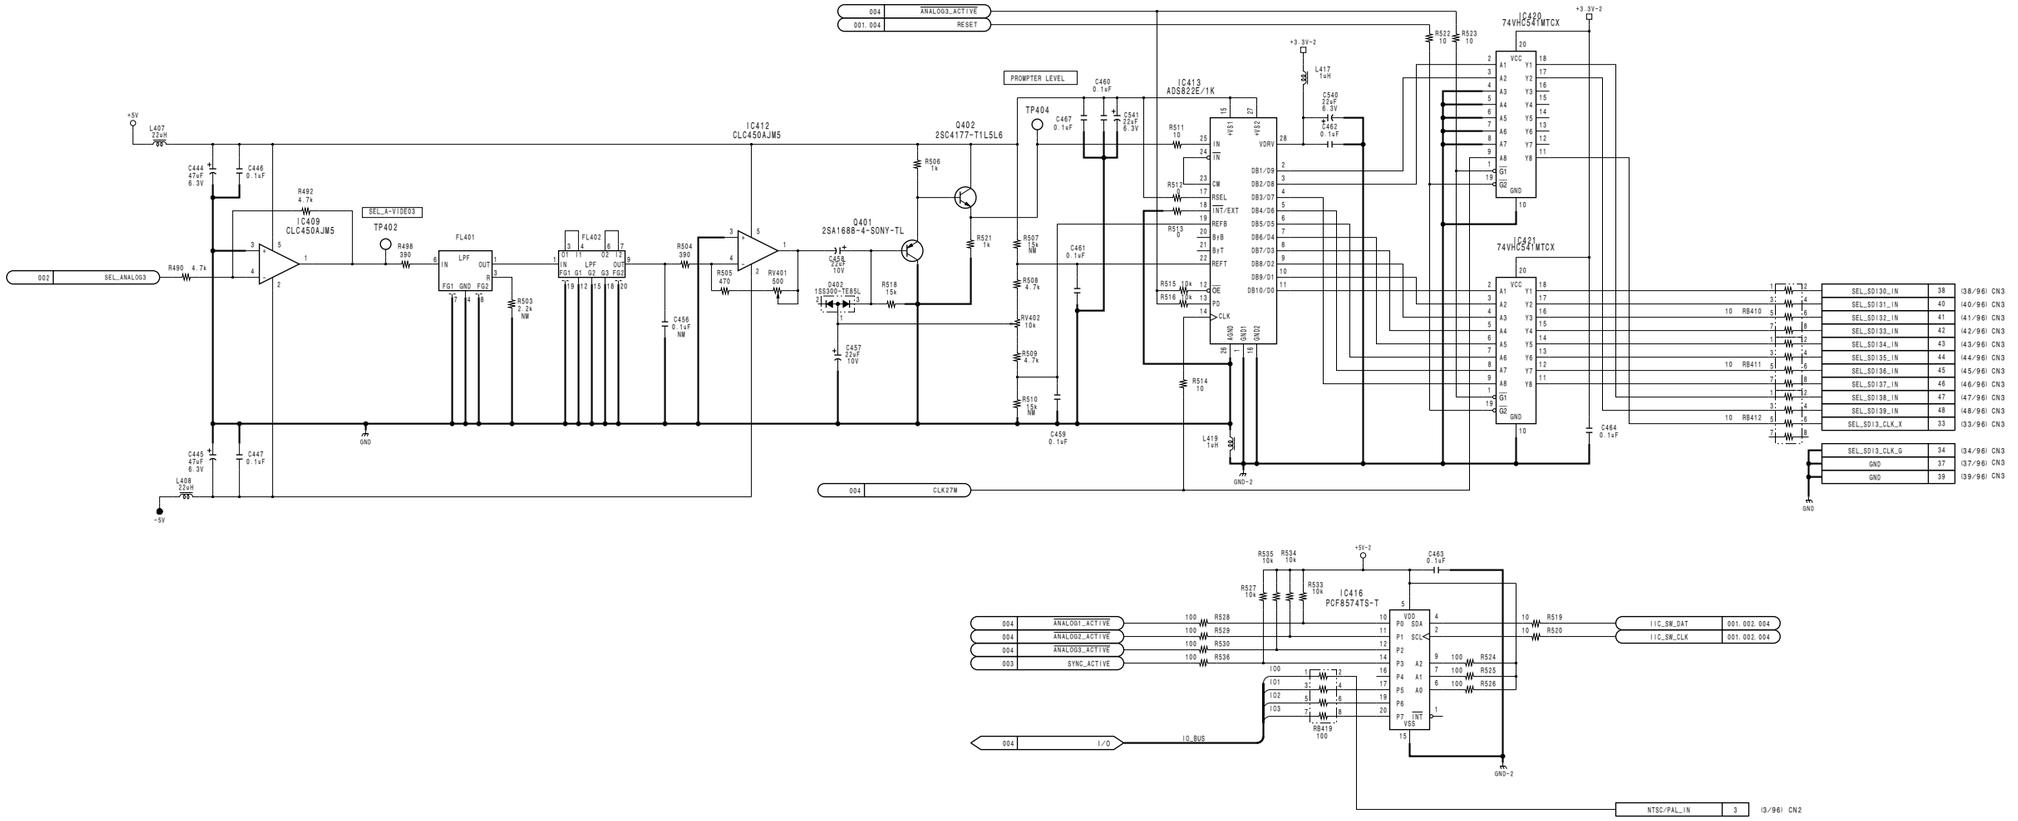

MARK	CHANGED INFORMATION	SERIAL No.
*1	R407, R420 DELETED	10021 and higher (UC)
	R415, R419 NM → 10	30001 and higher (J)
	R444 100 → 220	40008 and higher (CE)

IF-730 (4/4)
BOARD NO. 1-675-811-12
LOT NO. 912-
CCU-900_IF-730_013_4

AT-122 (1/7)

CCU-900 (UC) : S/N 10001 and Higher
CCU-900 (J) : S/N 30001 and Higher
CCU-900P (CE) : S/N 40001 and Higher

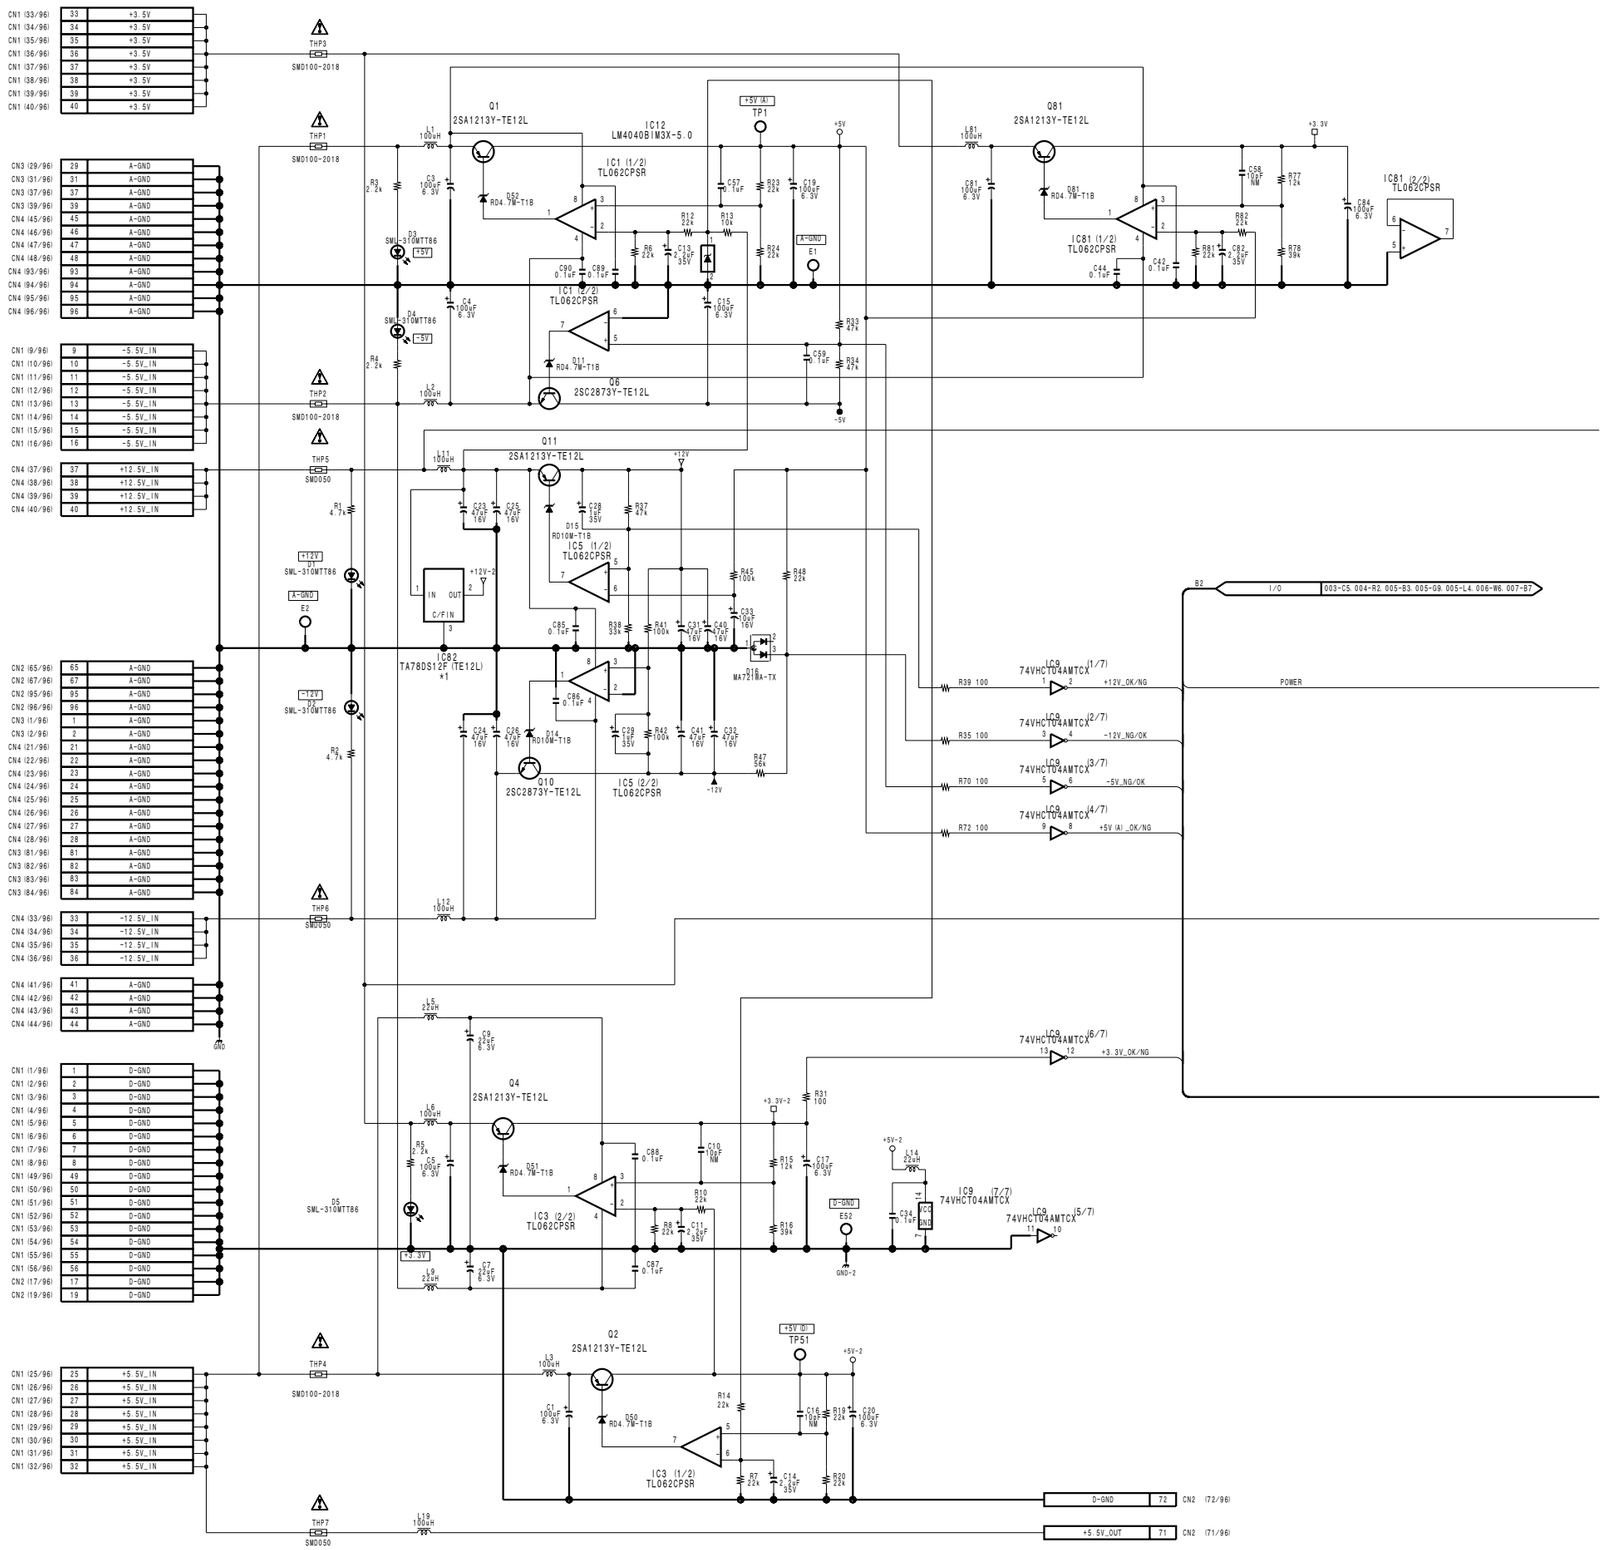

MARK	CHANGED INFORMATION	SERIAL No.
*1	IC82 NJM78L12UA-TE1 →TA78DS12F (TE12L)	10011 and higher (UC) 40008 and higher (CE)

4-38

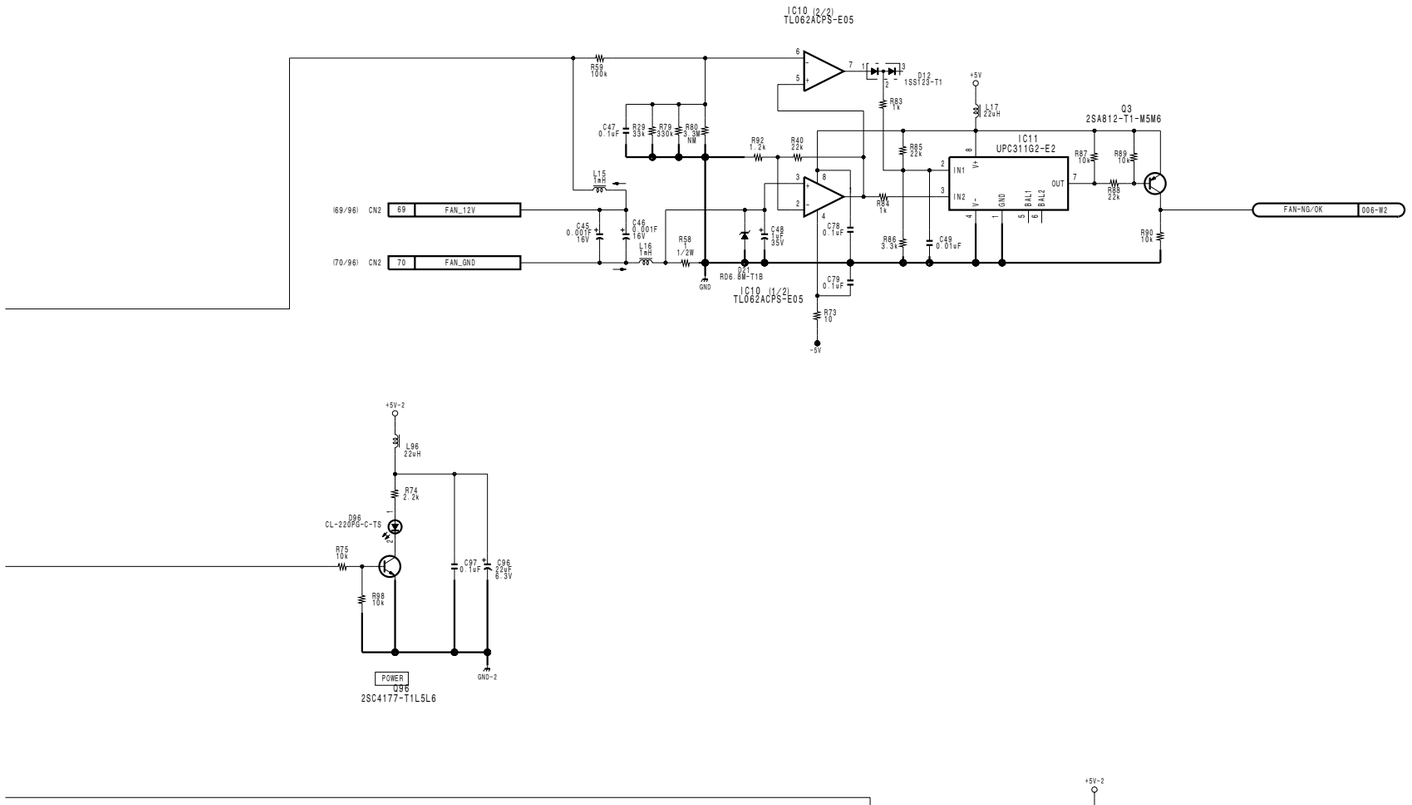

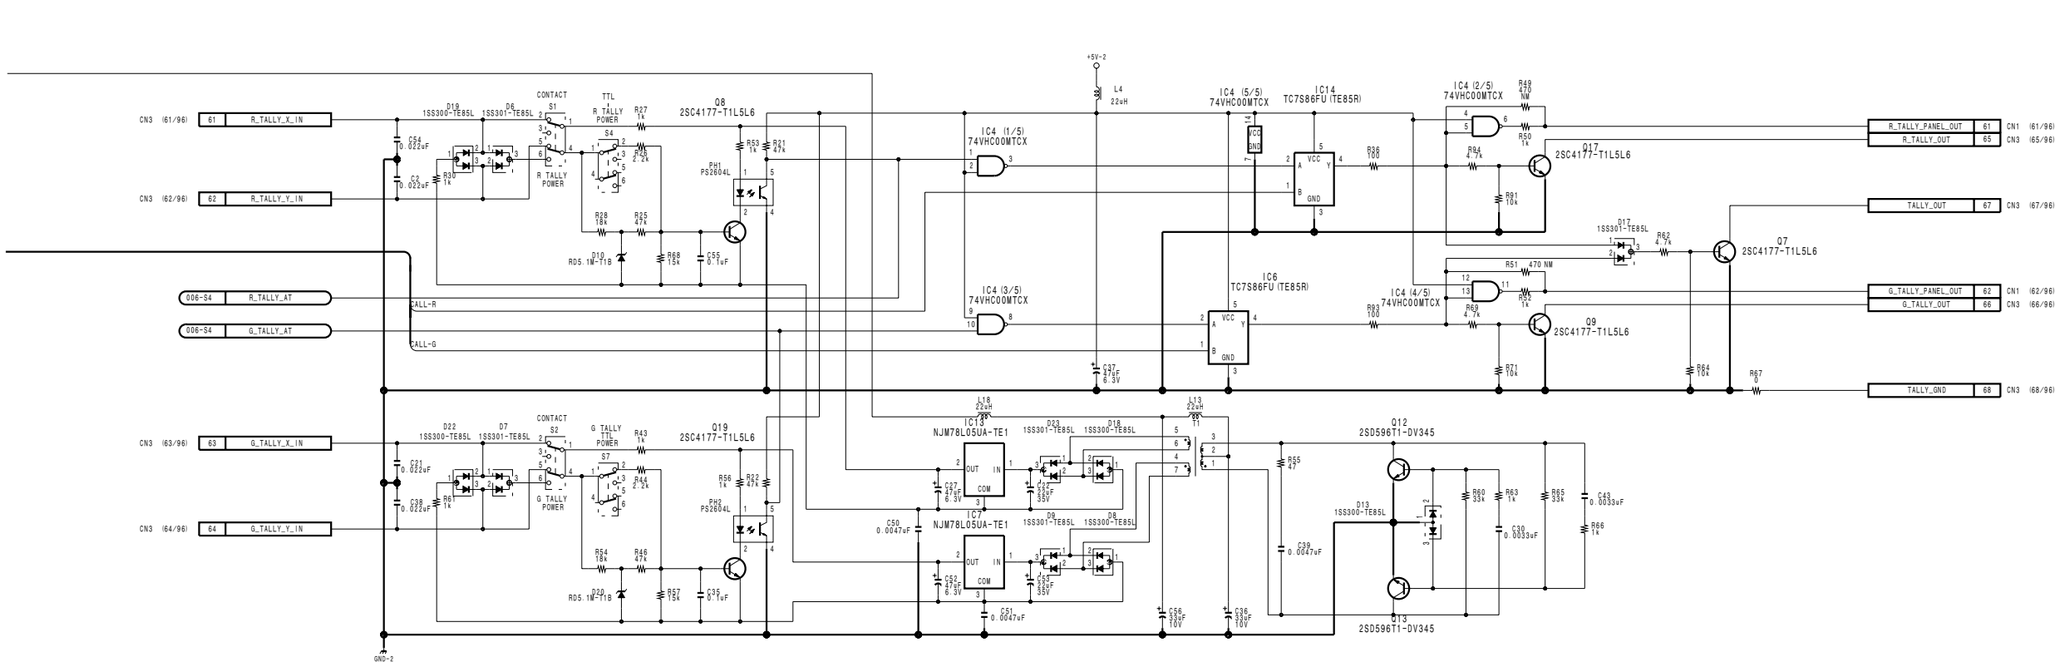

AT-122 (1/7)
BOARD NO. 1-675-813-11, 12
LOT NO. 912-
CCU-900_AT-122_013_1

AT-122 (2/7)

CCU-900 (UC) : S/N 10001 and Higher
CCU-900 (J) : S/N 30001 and Higher
CCU-900P (CE) : S/N 40001 and Higher

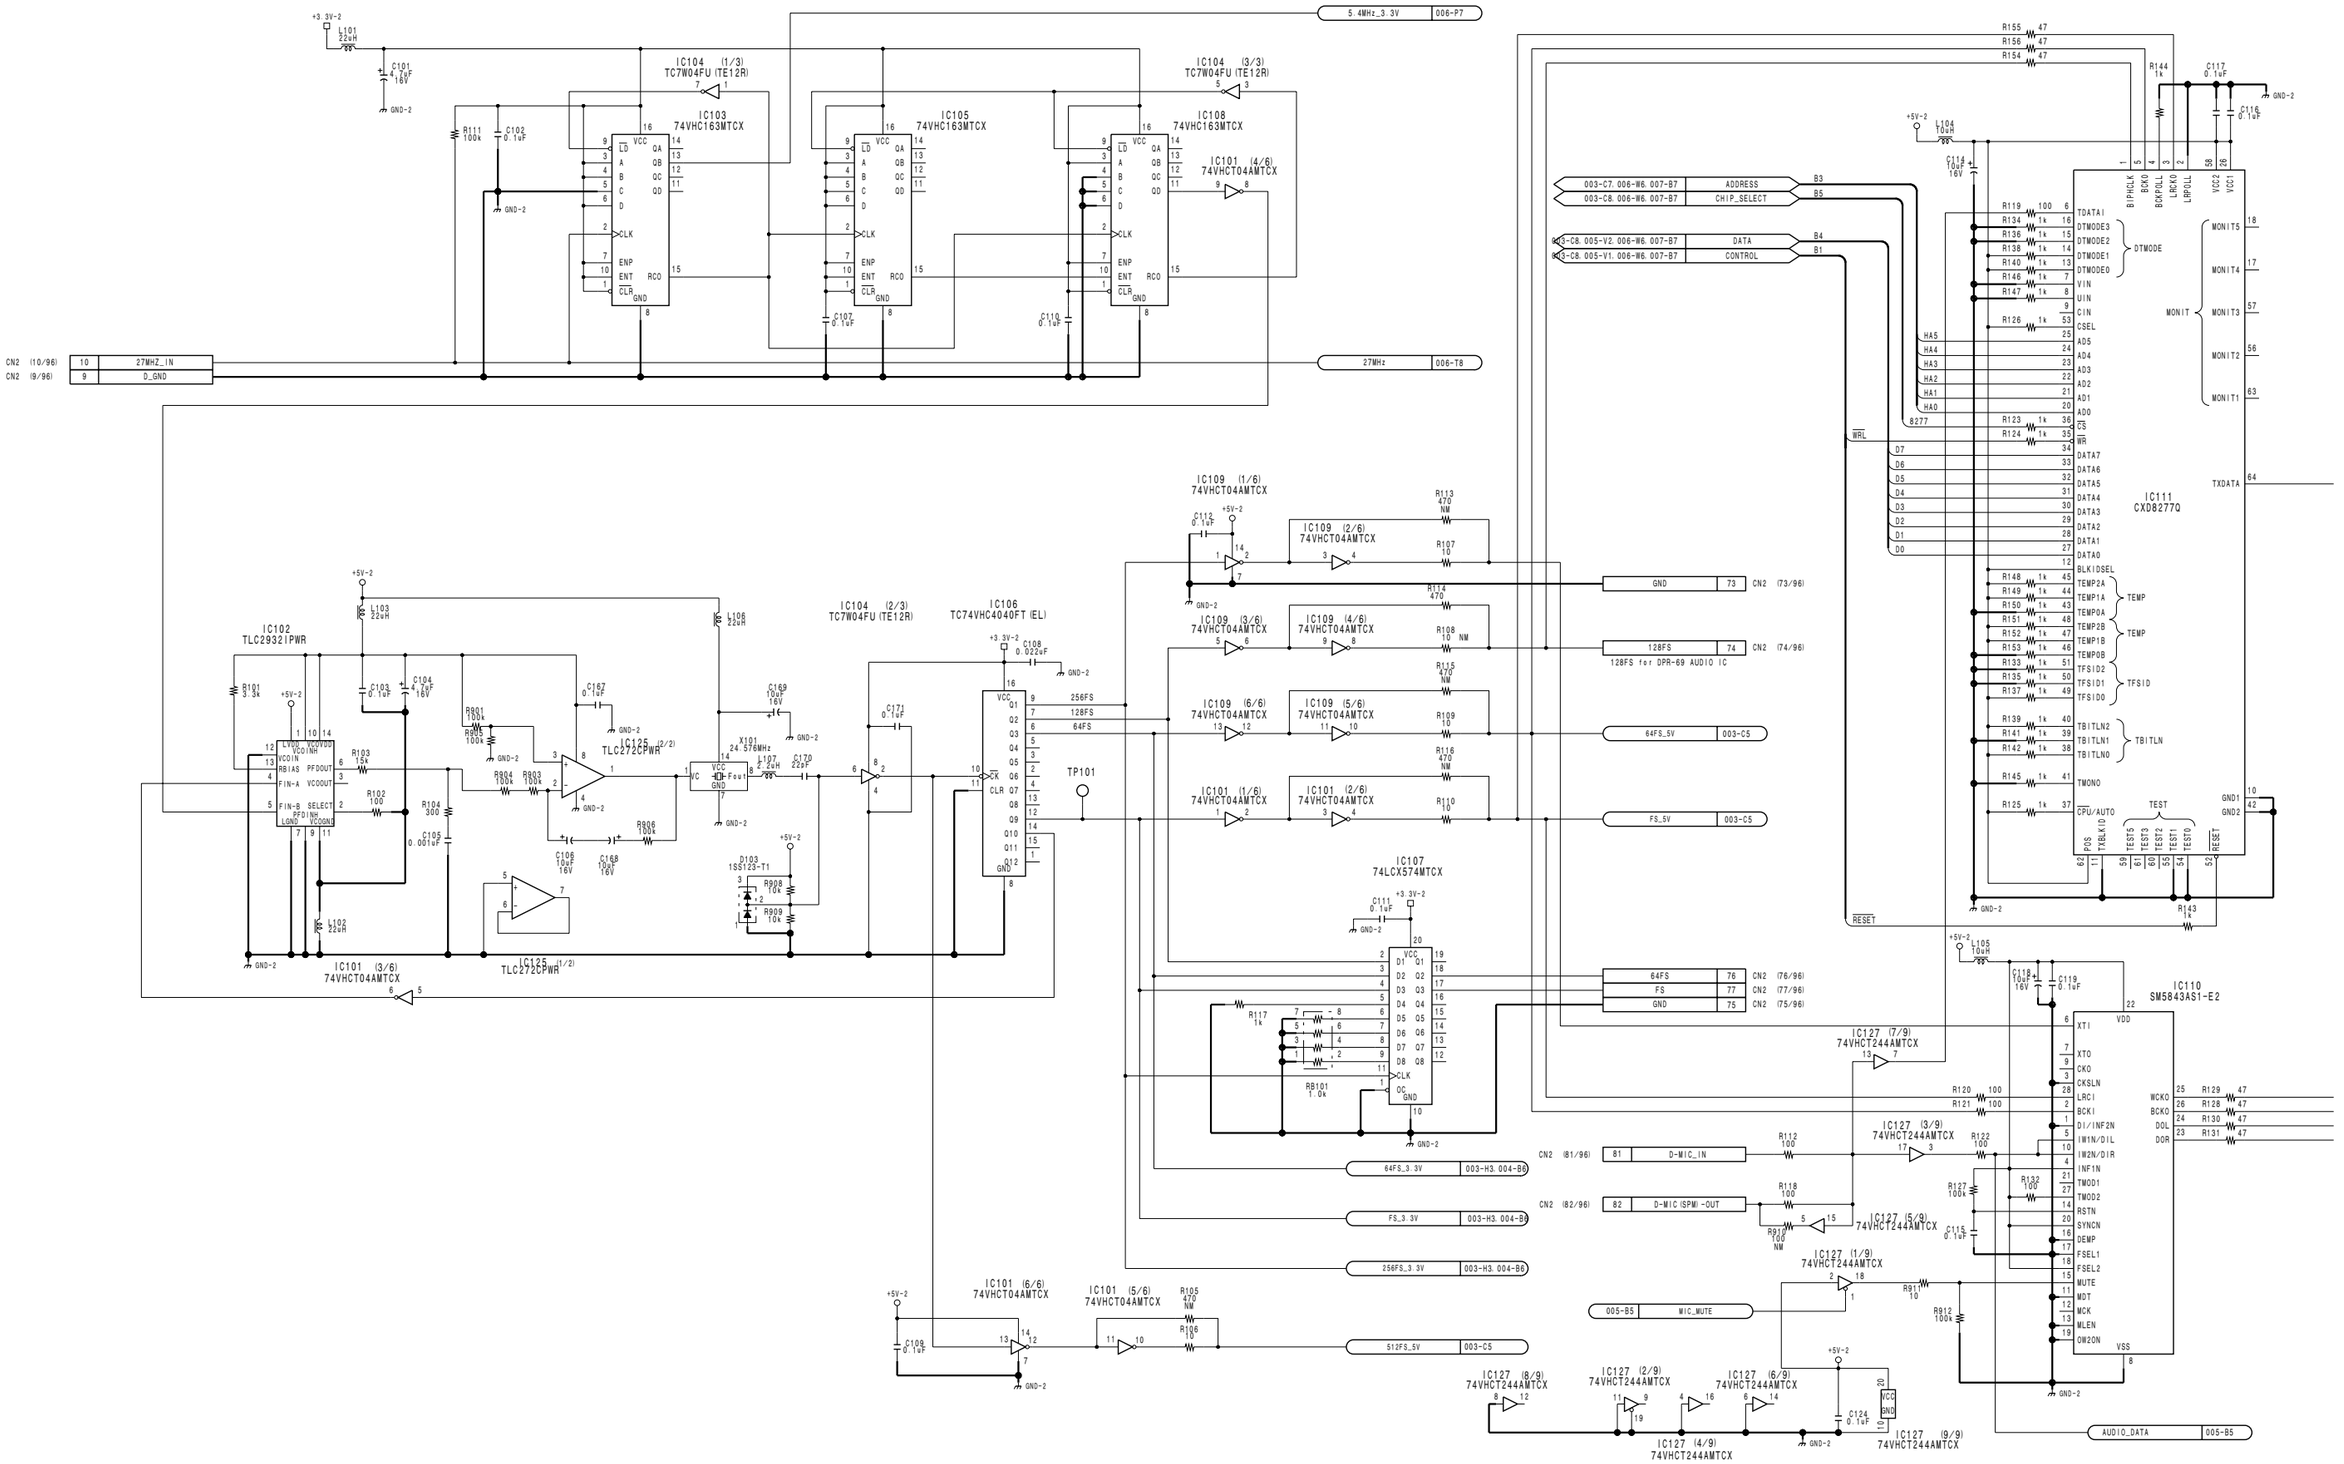

4-40

AT-122 (2/7)

MARK	CHANGED INFORMATION	SERIAL No.
*1	IC114, IC115 PCM1702U → PCM1702U/2K	10011 and higher (UC) 40008 and higher (CE)
	TP104, TP105 DELETED	

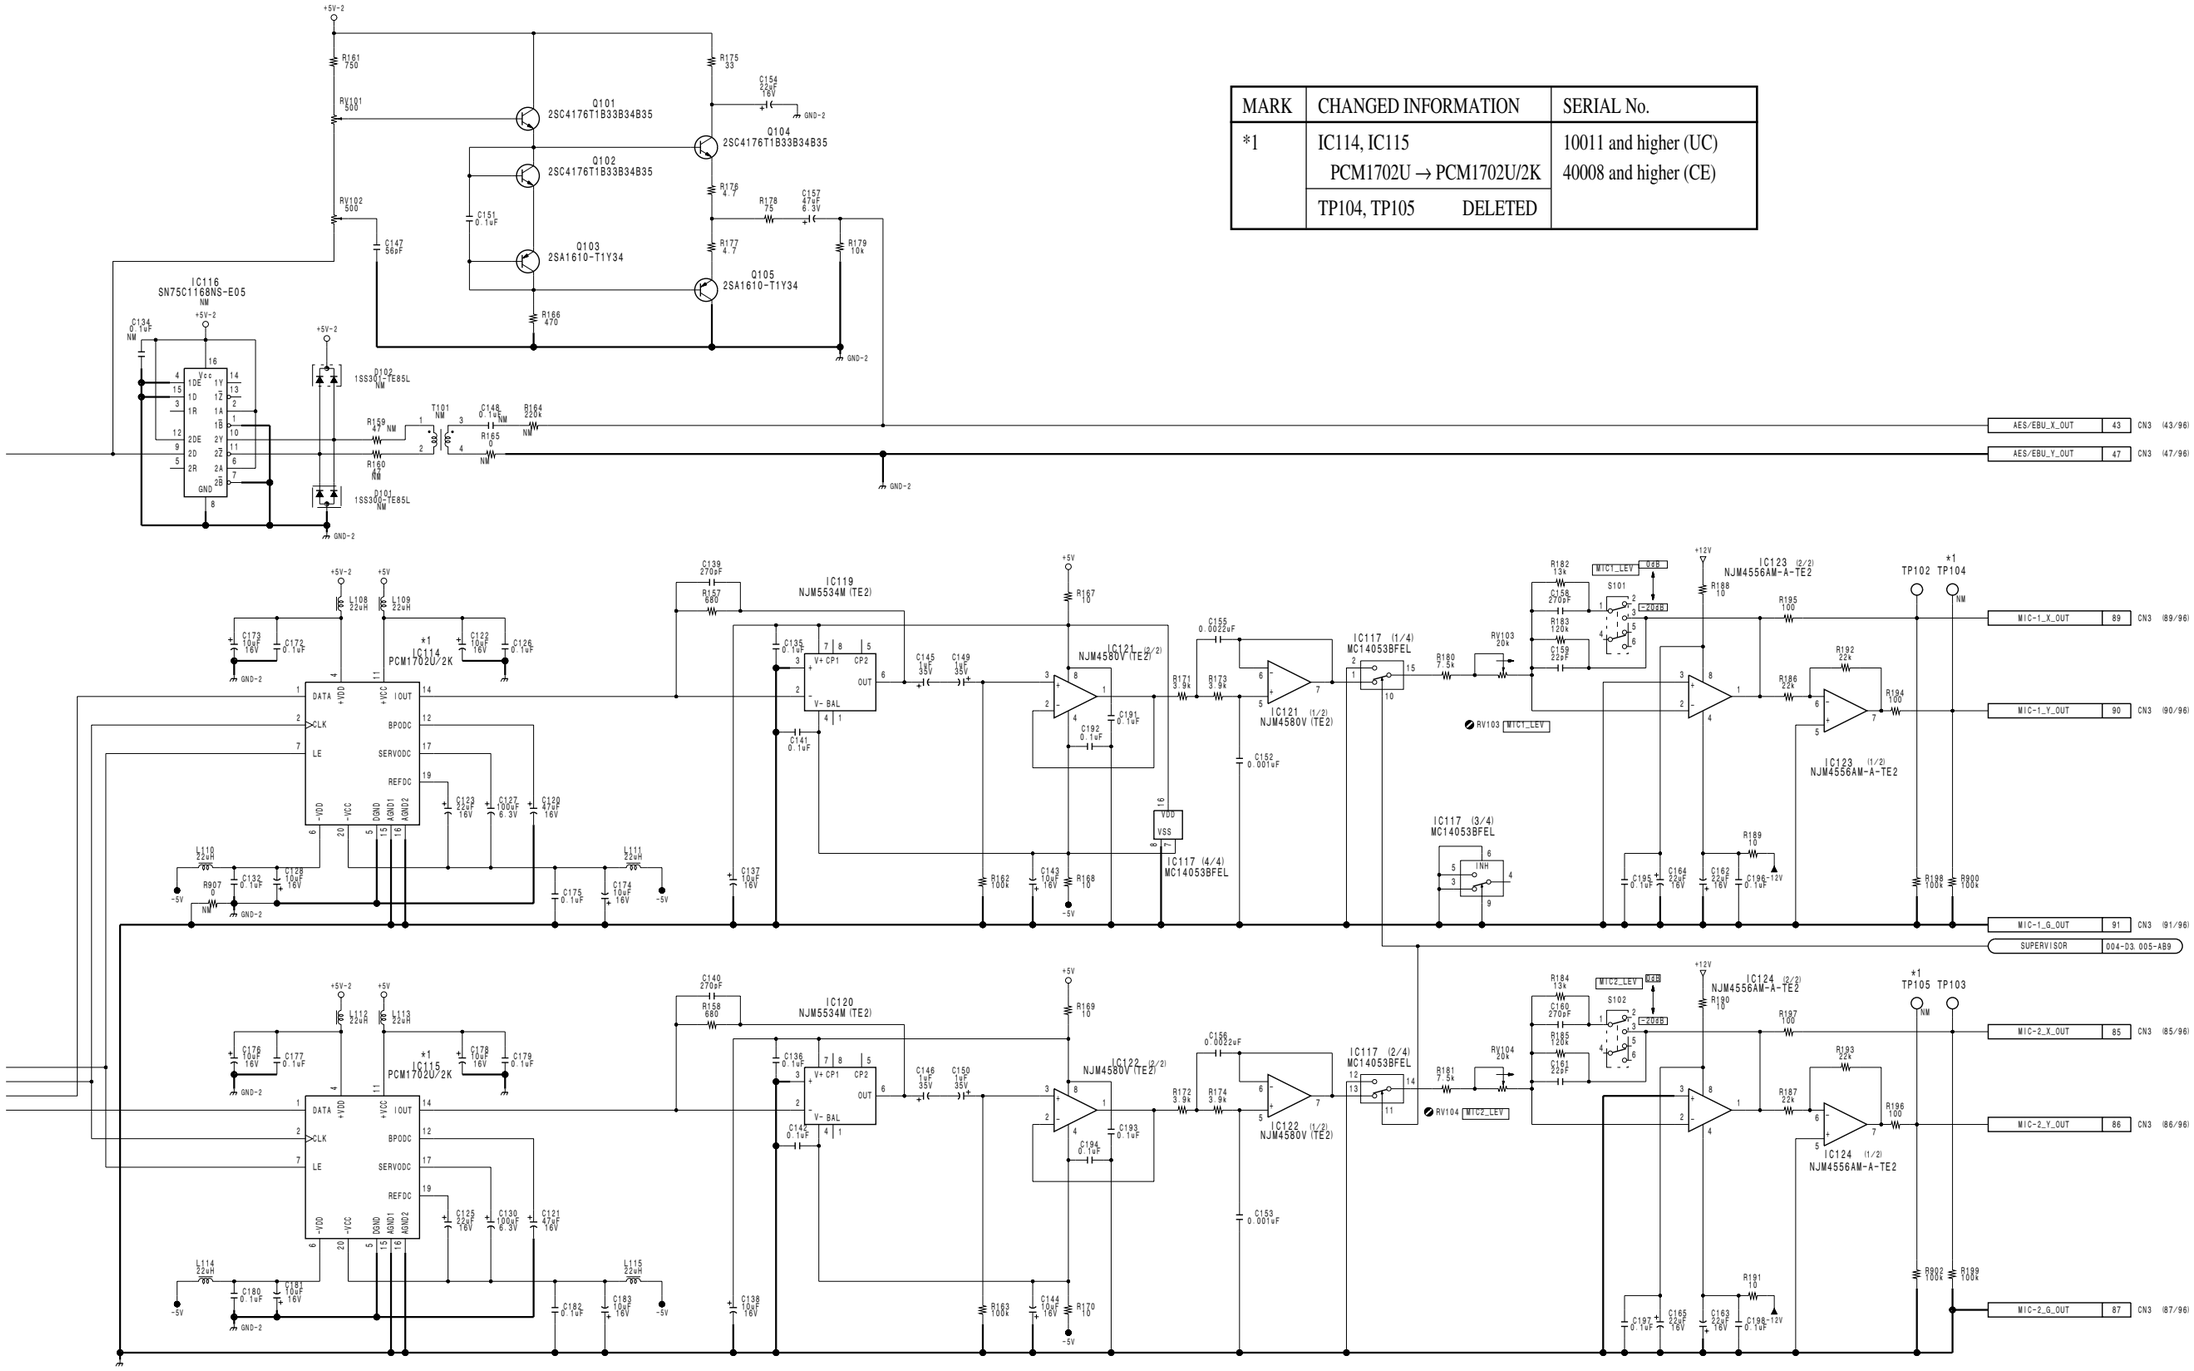

AT-122 (2/7)
BOARD NO. 1-675-813-11, 12
LOT NO. 912-
CCU-900_AT-122_013_2

AT-122 (3/7)

CCU-900 (UC) : S/N 10001 and Higher
CCU-900 (J) : S/N 30001 and Higher
CCU-900P (CE) : S/N 40001 and Higher

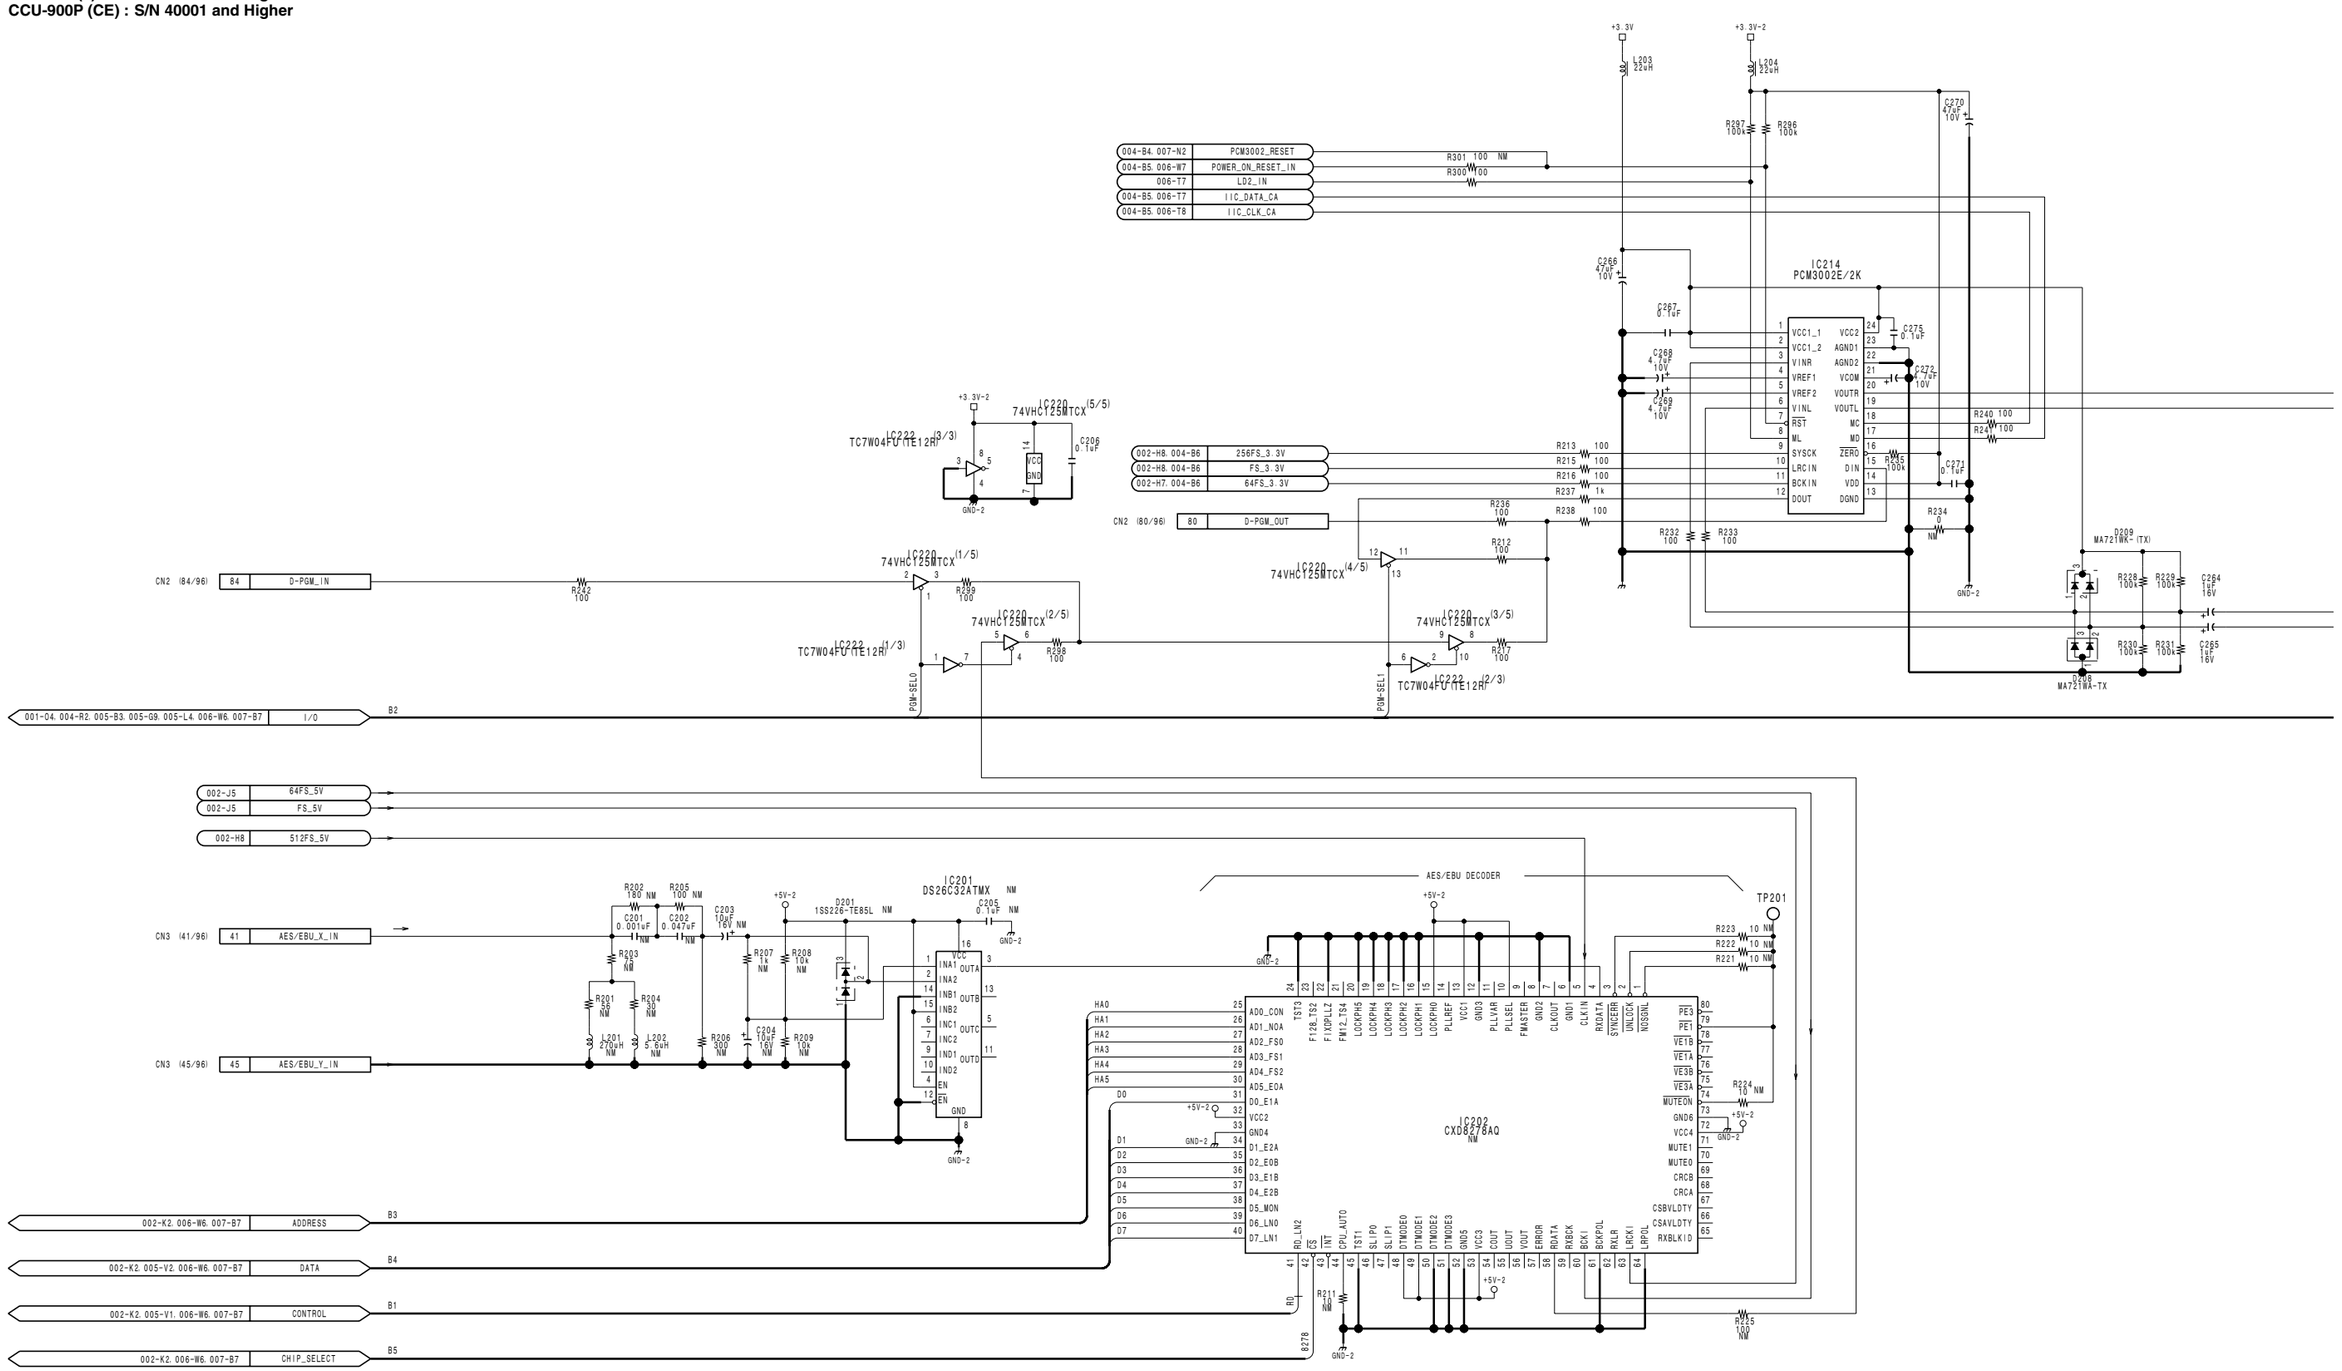

4-42

AT-122 (3/7)

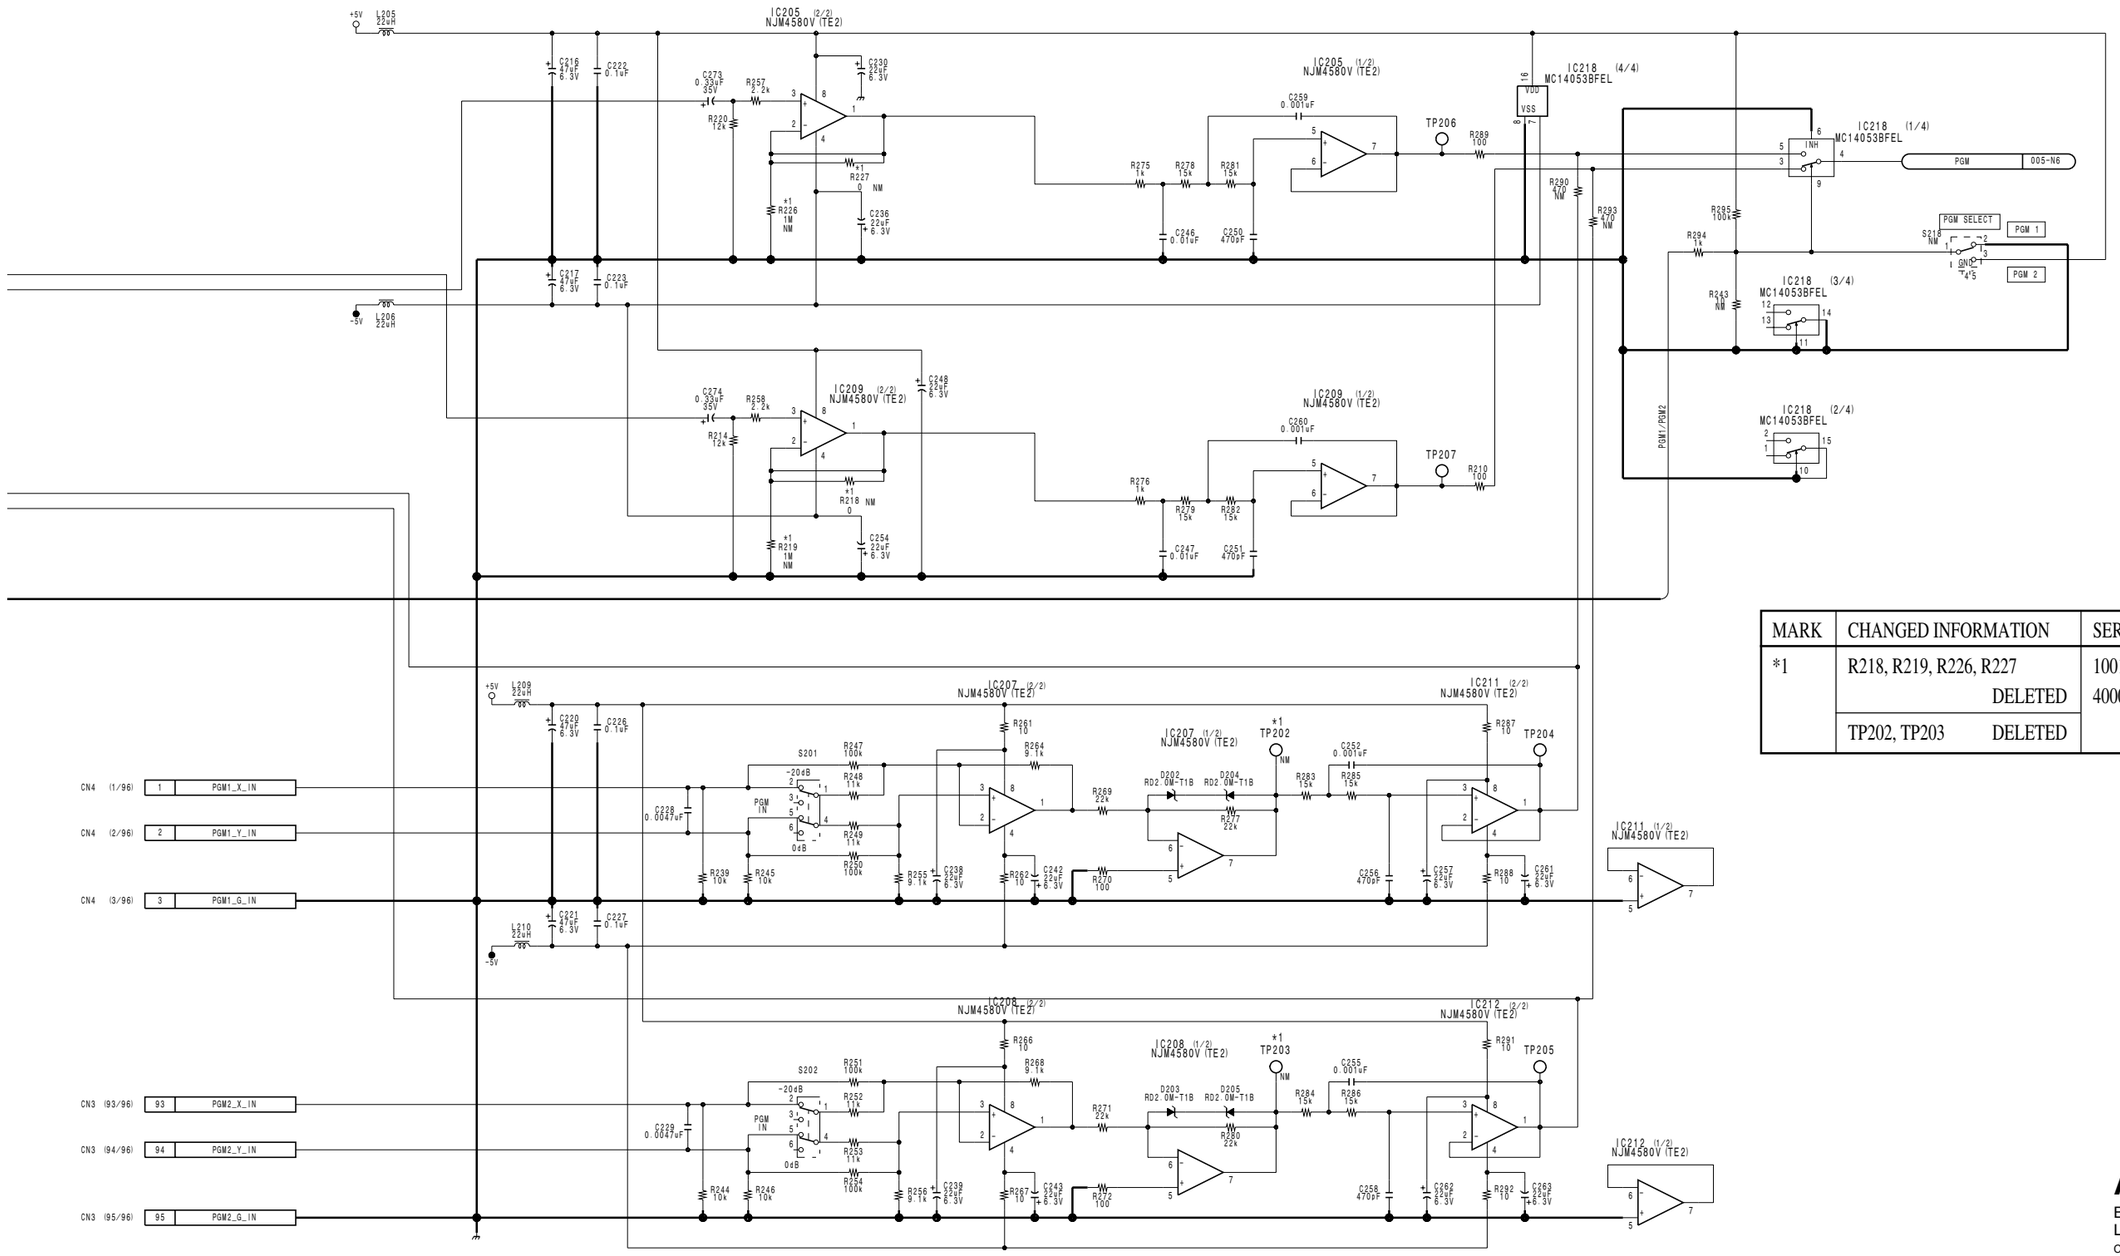

MARK	CHANGED INFORMATION	SERIAL No.
*1	R218, R219, R226, R227 DELETED	10011 and higher (UC) 40008 and higher (CE)
	TP202, TP203 DELETED	

AT-122 (3/7)
BOARD NO. 1-675-813-11, 12
LOT NO. 912-
CCU-900_AT-122_013_3

AT-122 (4/7)

CCU-900 (UC) : S/N 10001 and Higher
CCU-900 (J) : S/N 30001 and Higher
CCU-900P (CE) : S/N 40001 and Higher

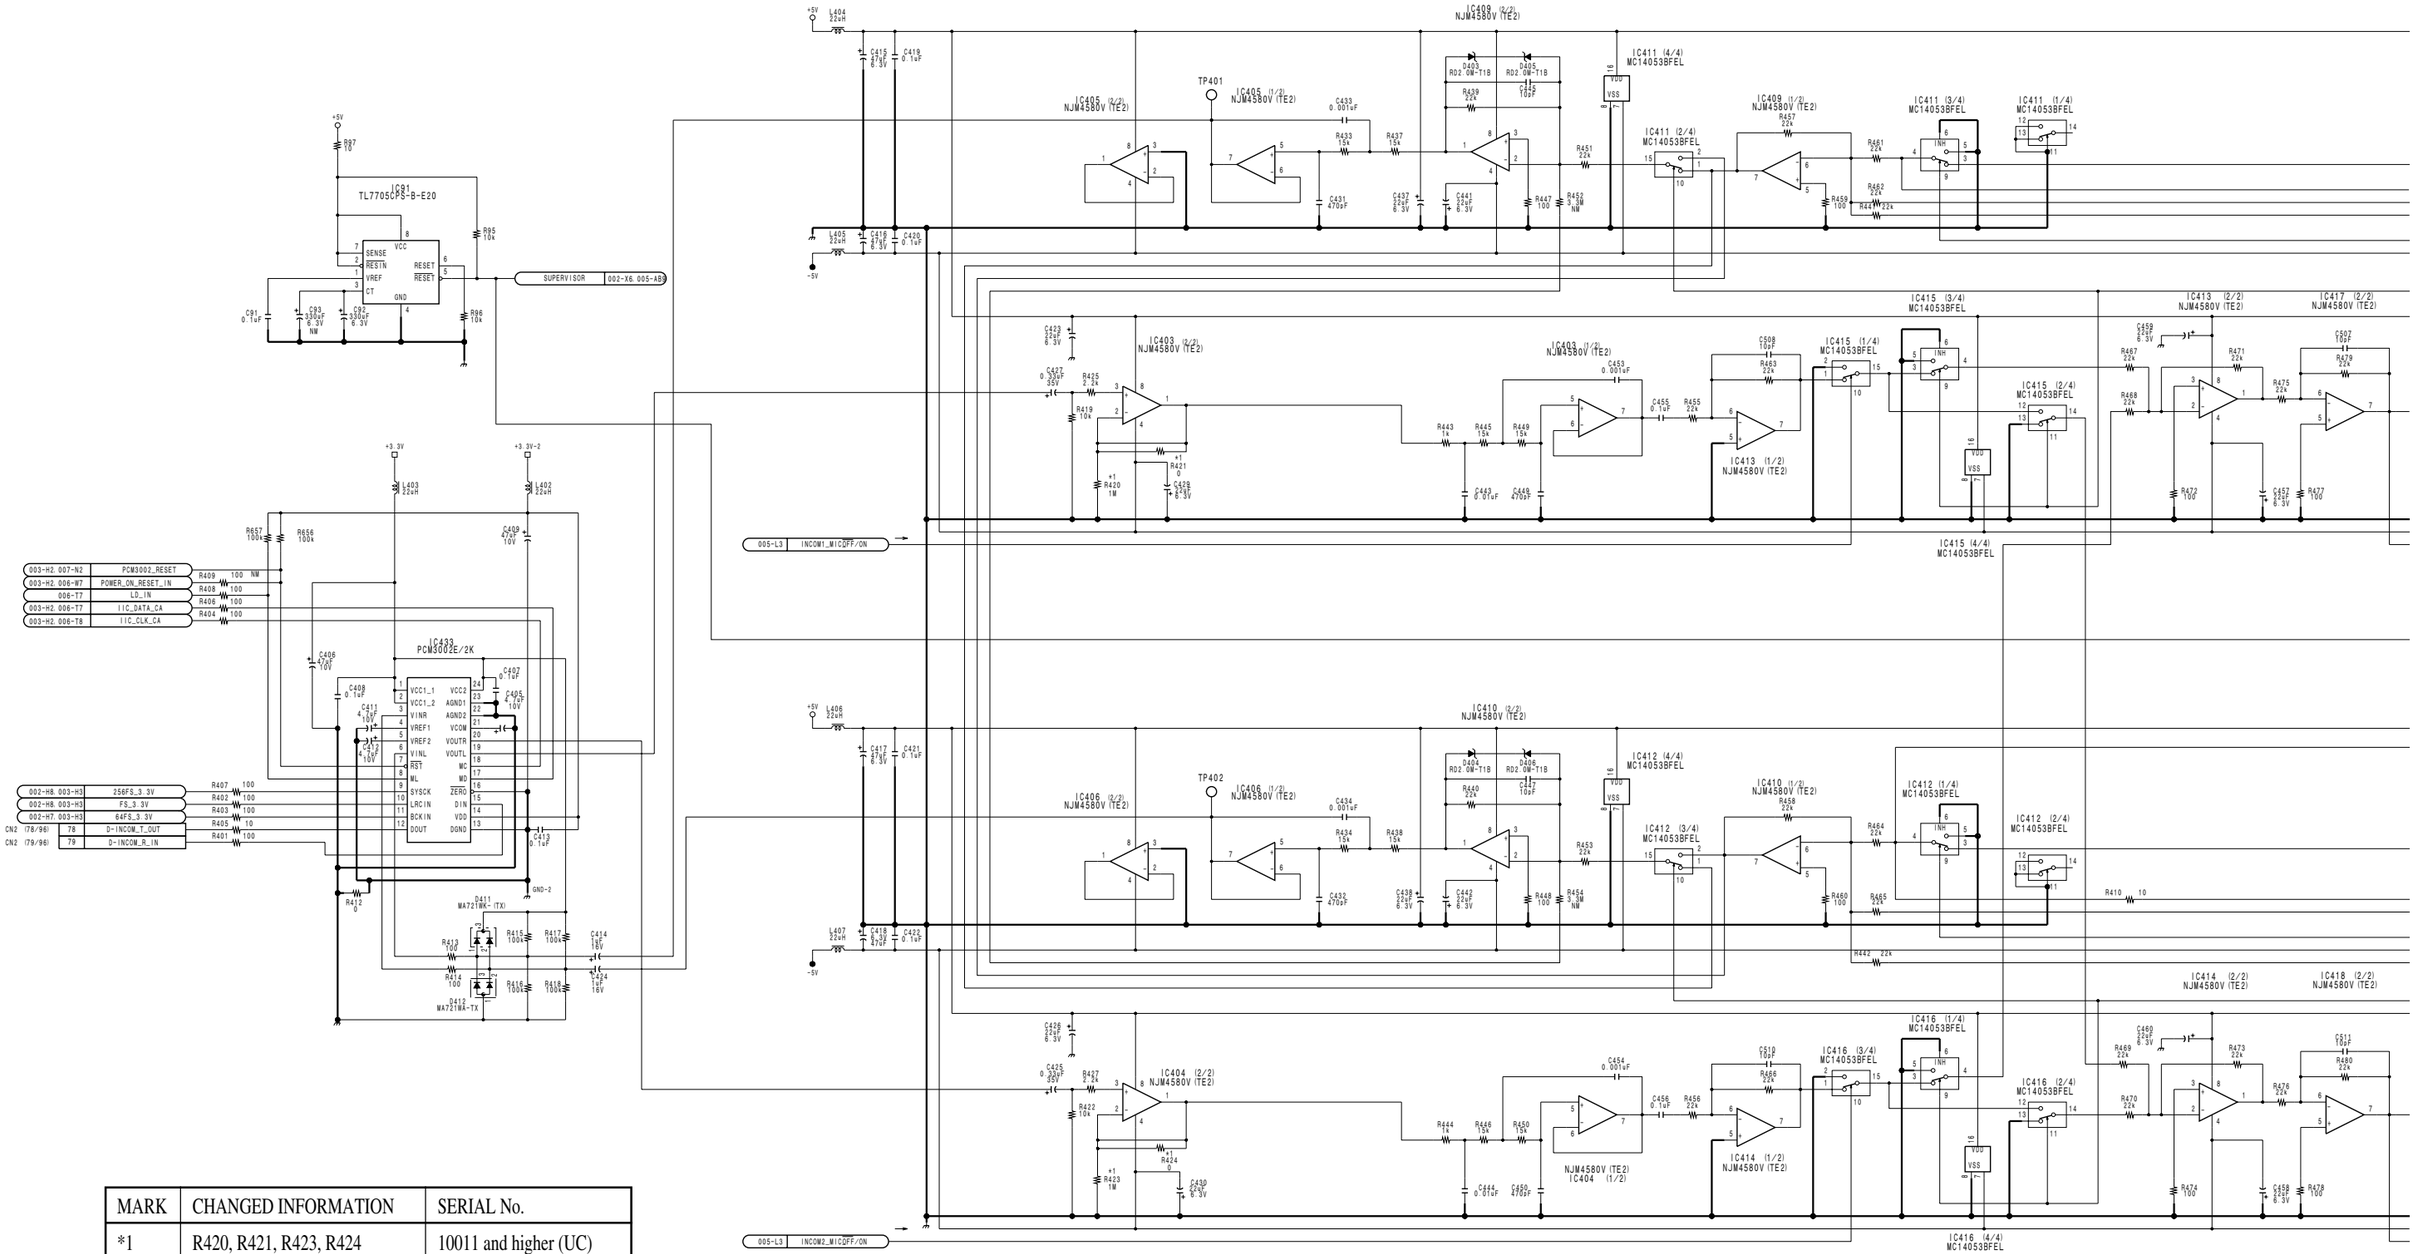

MARK	CHANGED INFORMATION	SERIAL No.
*1	R420, R421, R423, R424 DELETED	10011 and higher (UC) 40008 and higher (CE)

4-44

AT-122 (4/7)

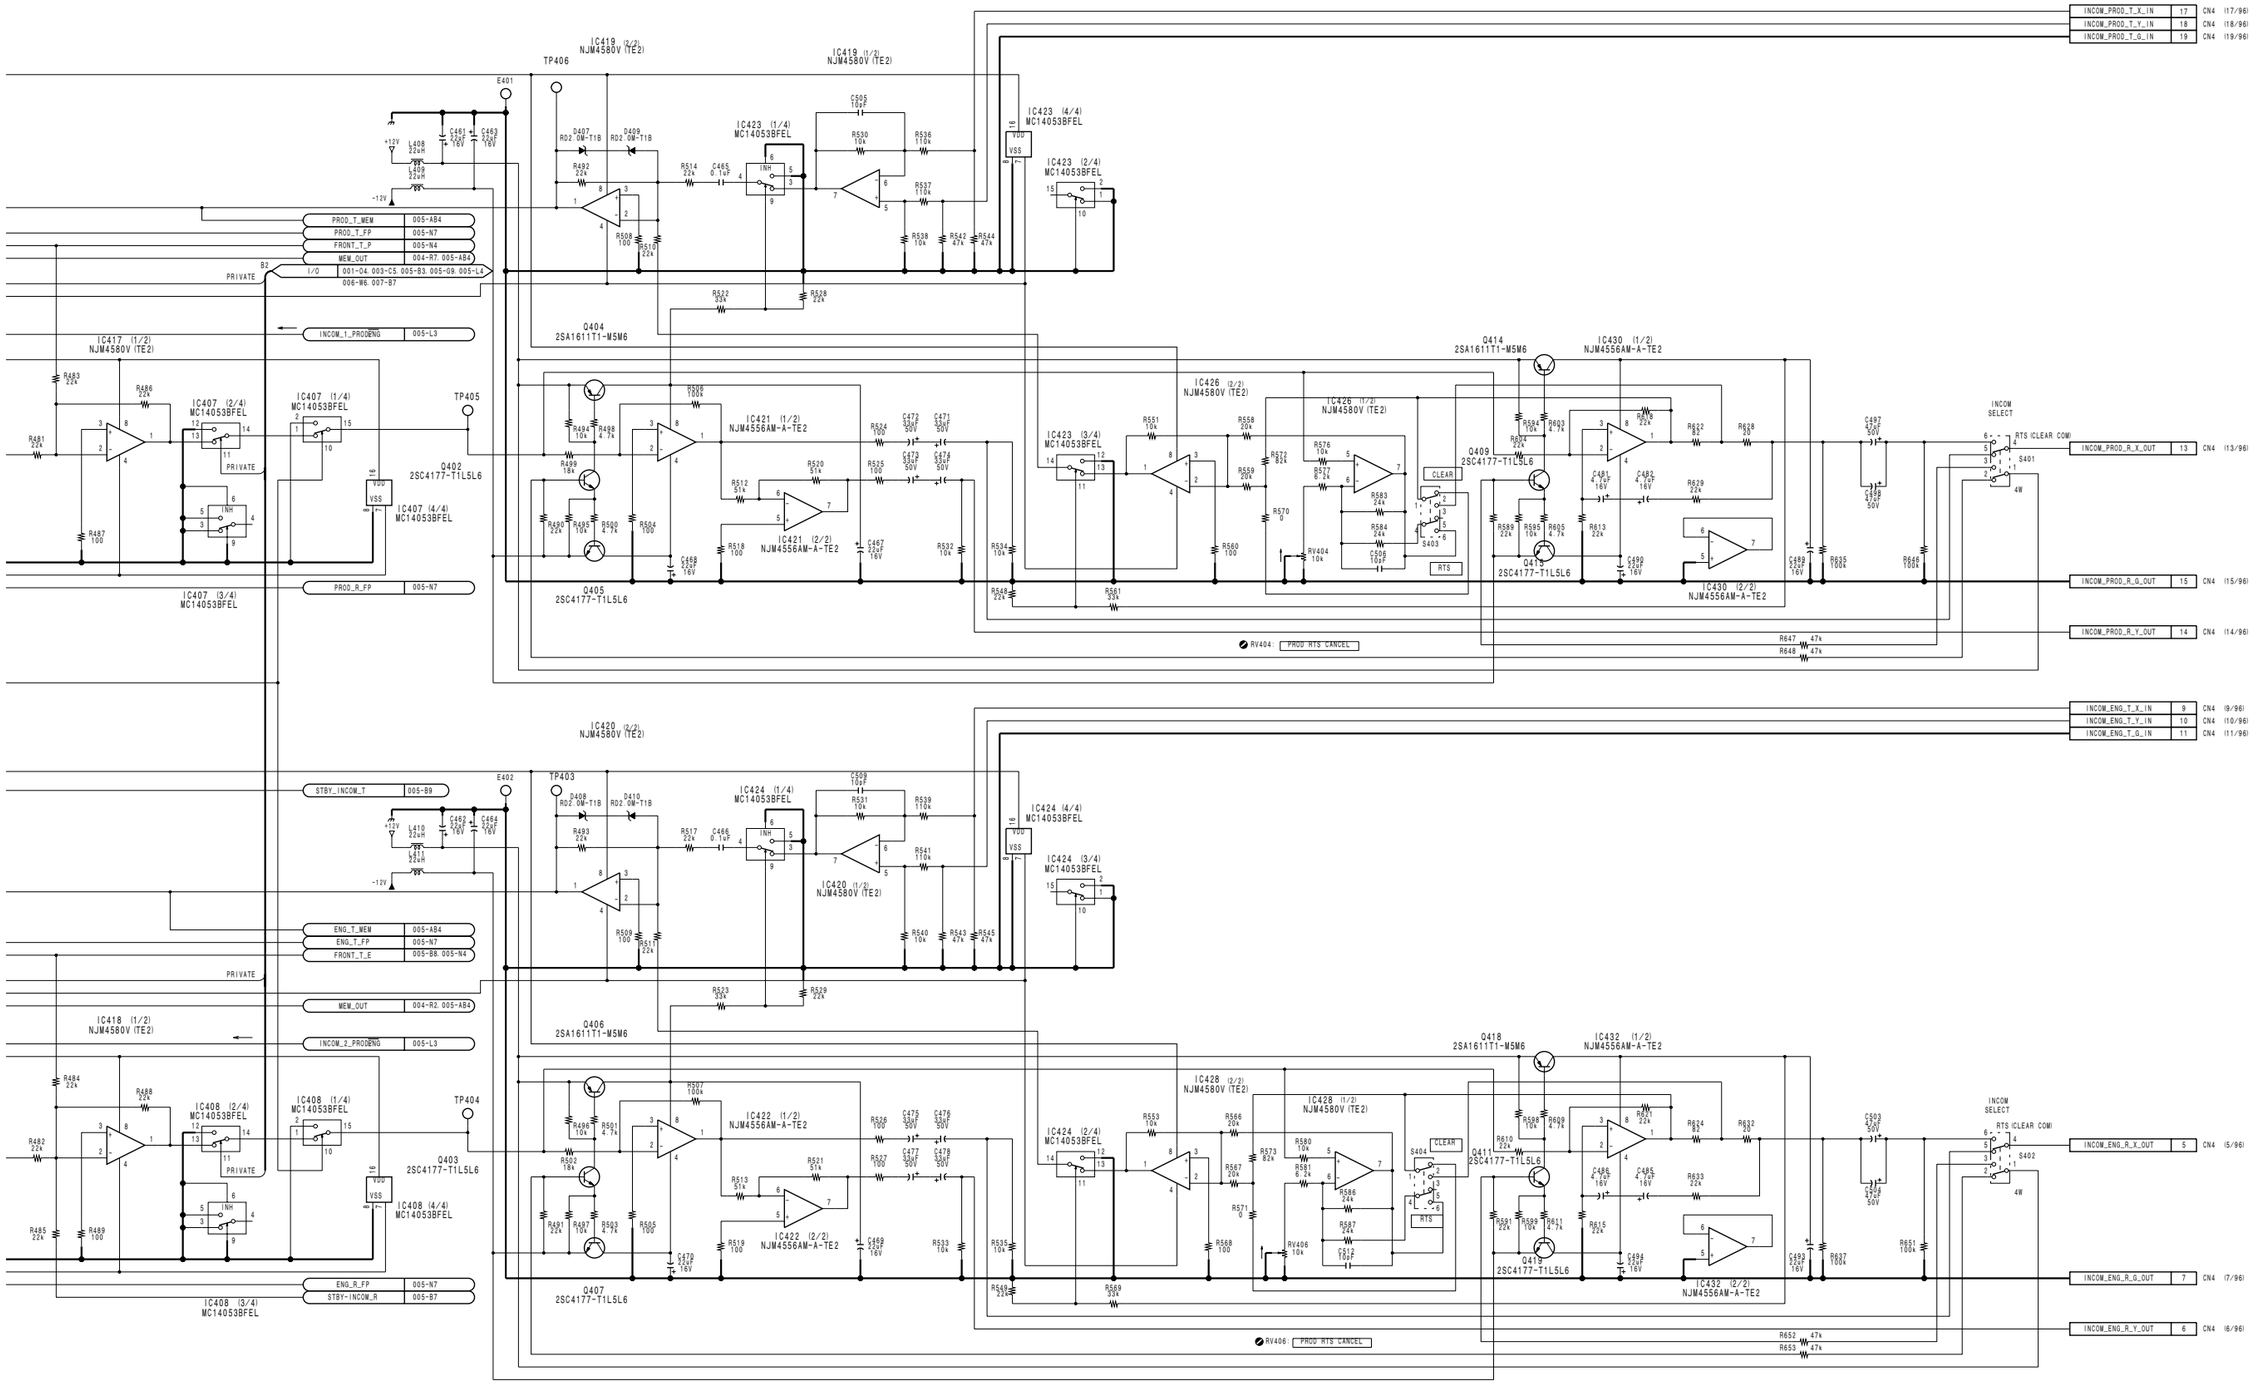

AT-122 (4/7)
BOARD NO. 1-675-813-11, 12
LOT NO. 912-
CCU-900_AT-122_013_4

AT-122 (5/7)

CCU-900 (UC) : S/N 10001 and Higher
CCU-900 (J) : S/N 30001 and Higher
CCU-900P (CE) : S/N 40001 and Higher

For UC : Serial No. 10001 through 10010
For CE : Serial No. 40001 through 40007

For UC : Serial No. 10011 and higher
For CE : Serial No. 40008 and higher

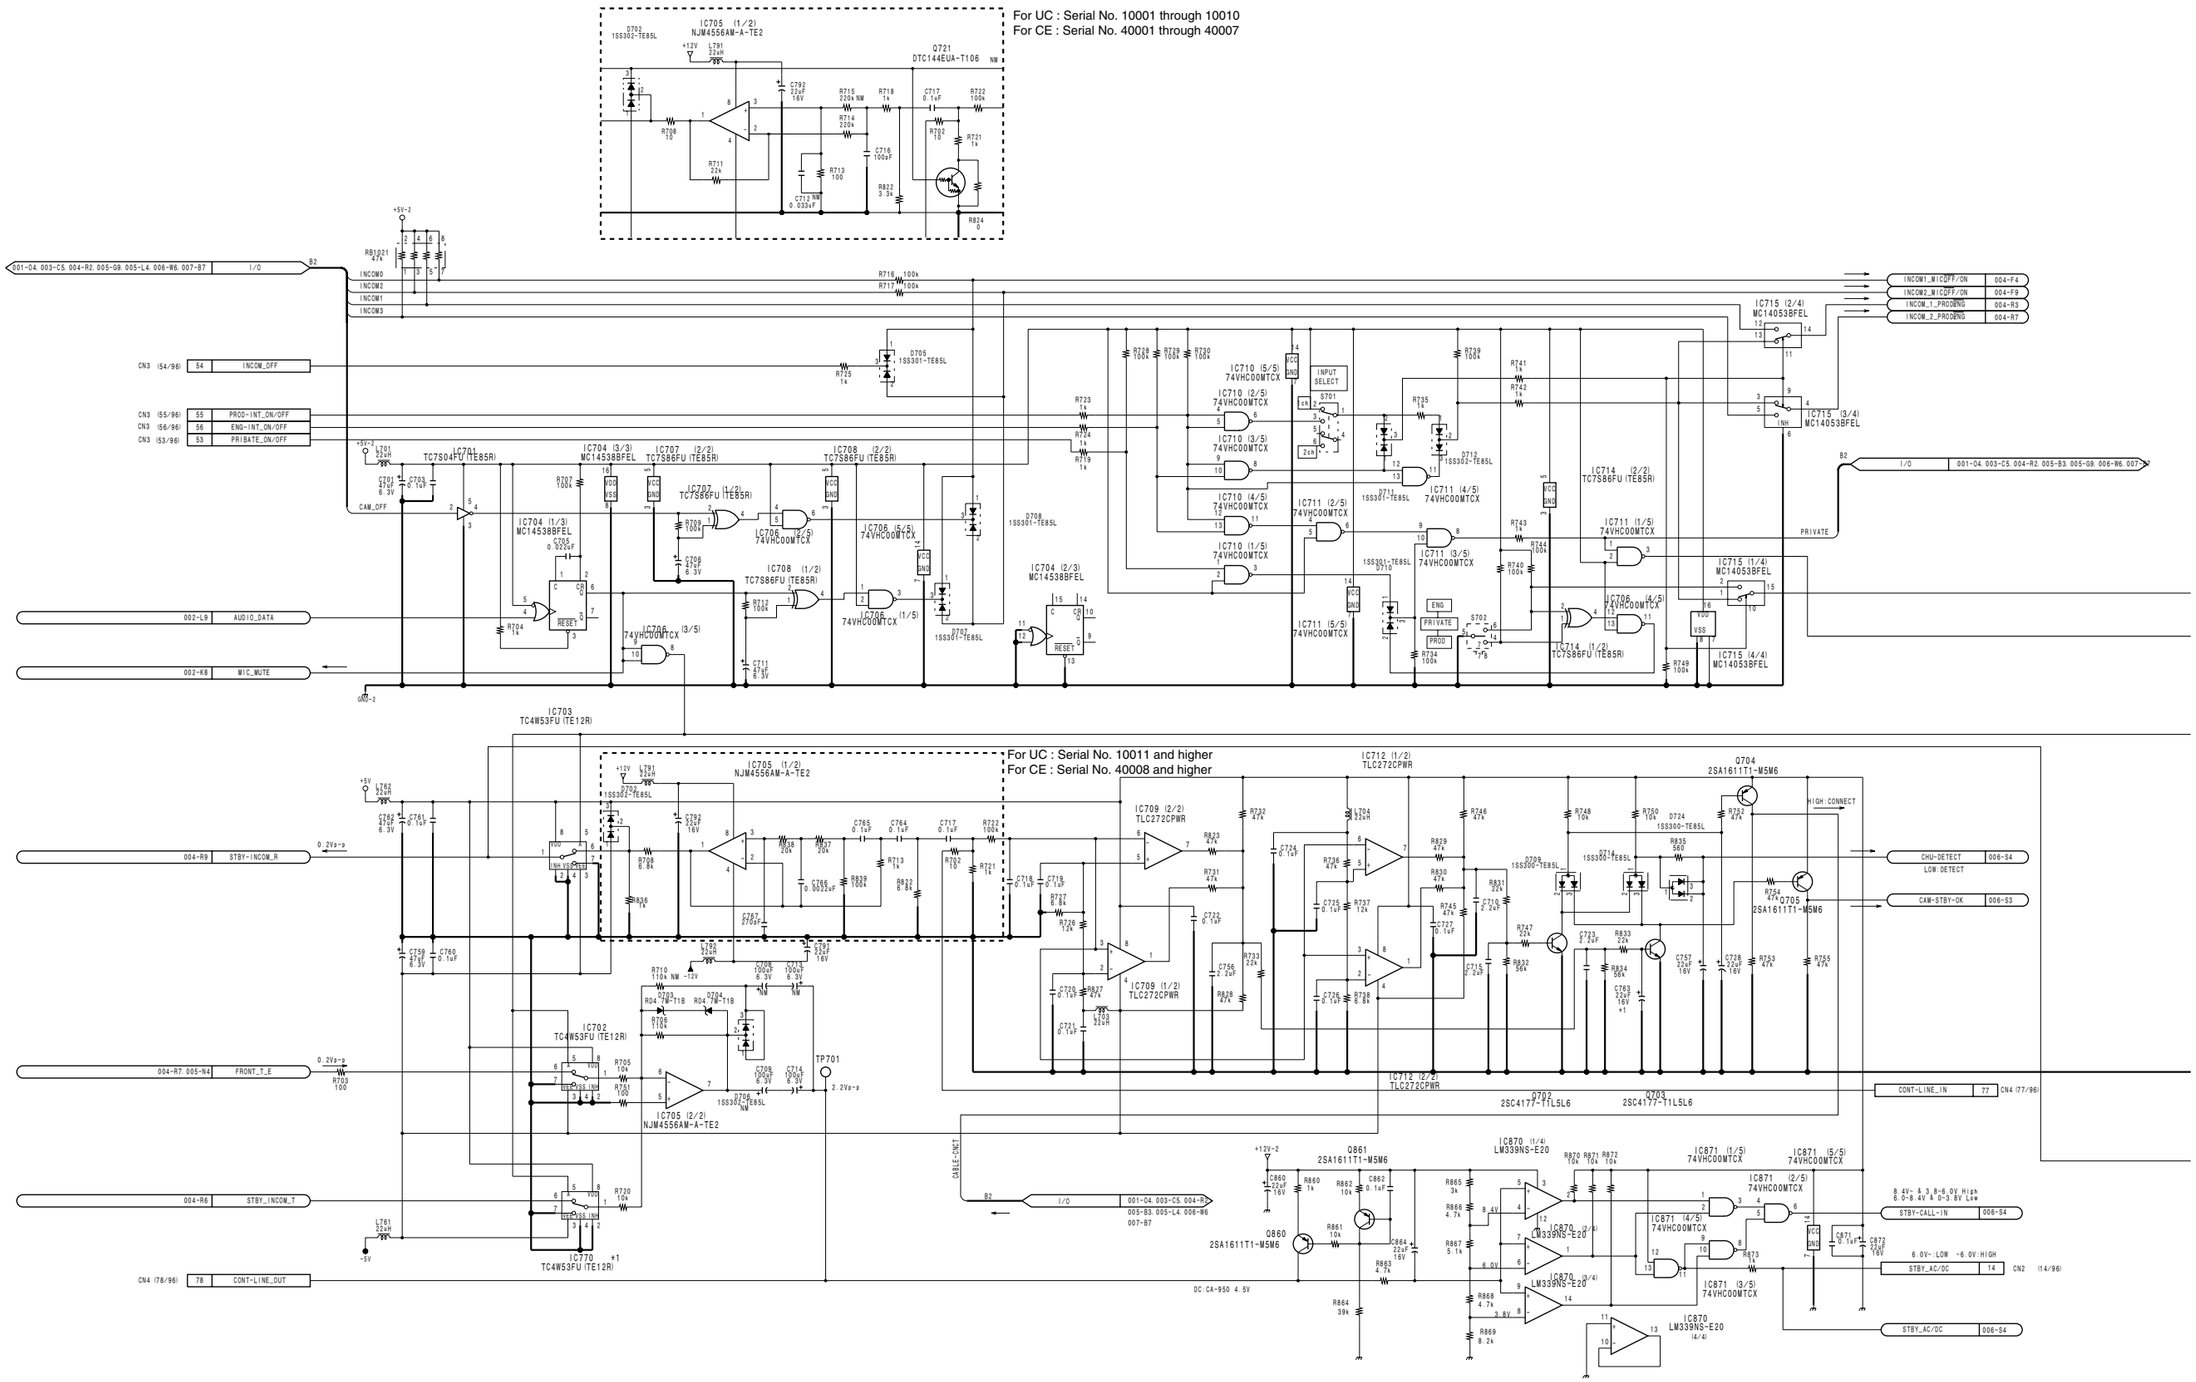

4-46

AT-122 (5/7)

MARK	CHANGED INFORMATION	SERIAL No.
*1	C763 22/6.3 V → 22/16 V	10011 and higher (UC)
	R890 ADDED	40008 and higher (CE)
	IC770 ADDED	

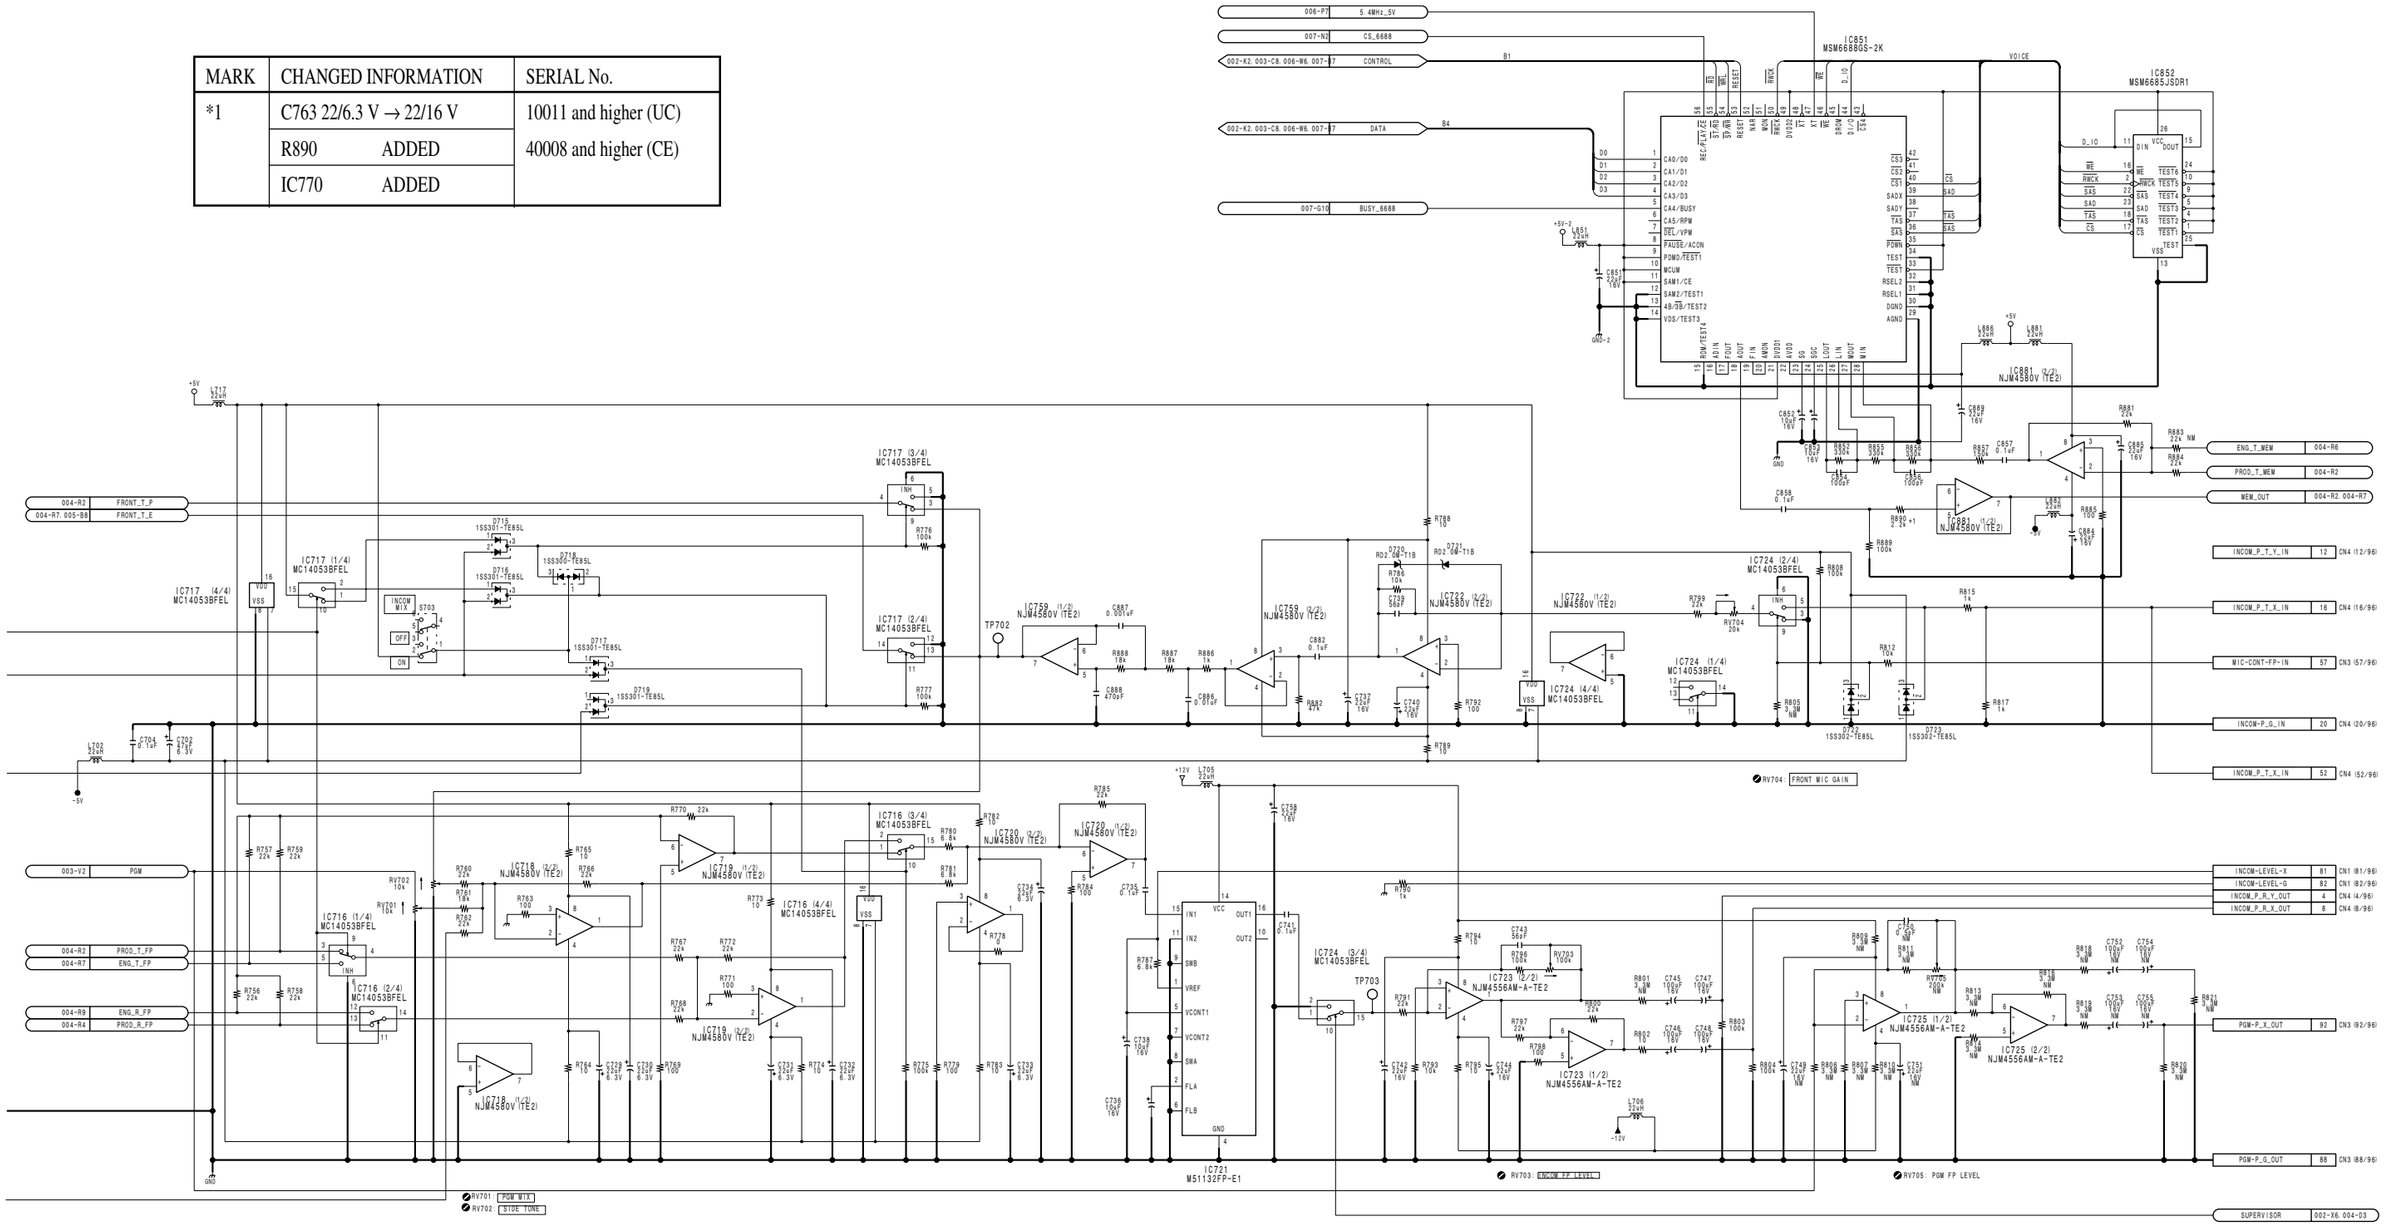

AT-122 (5/7)

BOARD NO. 1-675-813-11, 12
LOT NO. 912-
CCU-900_AT-122_013_5

AT-122 (6/7)

CCU-900 (UC) : S/N 10001 and Higher
CCU-900 (J) : S/N 30001 and Higher
CCU-900P (CE) : S/N 40001 and Higher

MARK	CHANGED INFORMATION	SERIAL No.
*1	IC1025 uPD4702G → uPD4702G-E2	10011 and higher (UC) 40008 and higher (CE)
	IC1021, IC1023 DELETED	

For UC : Serial No. 10001 through 10010
For CE : Serial No. 40001 through 40007

For UC : Serial No. 10011 and higher
For CE : Serial No. 40008 and higher

4-48

AT-122 (6/7)

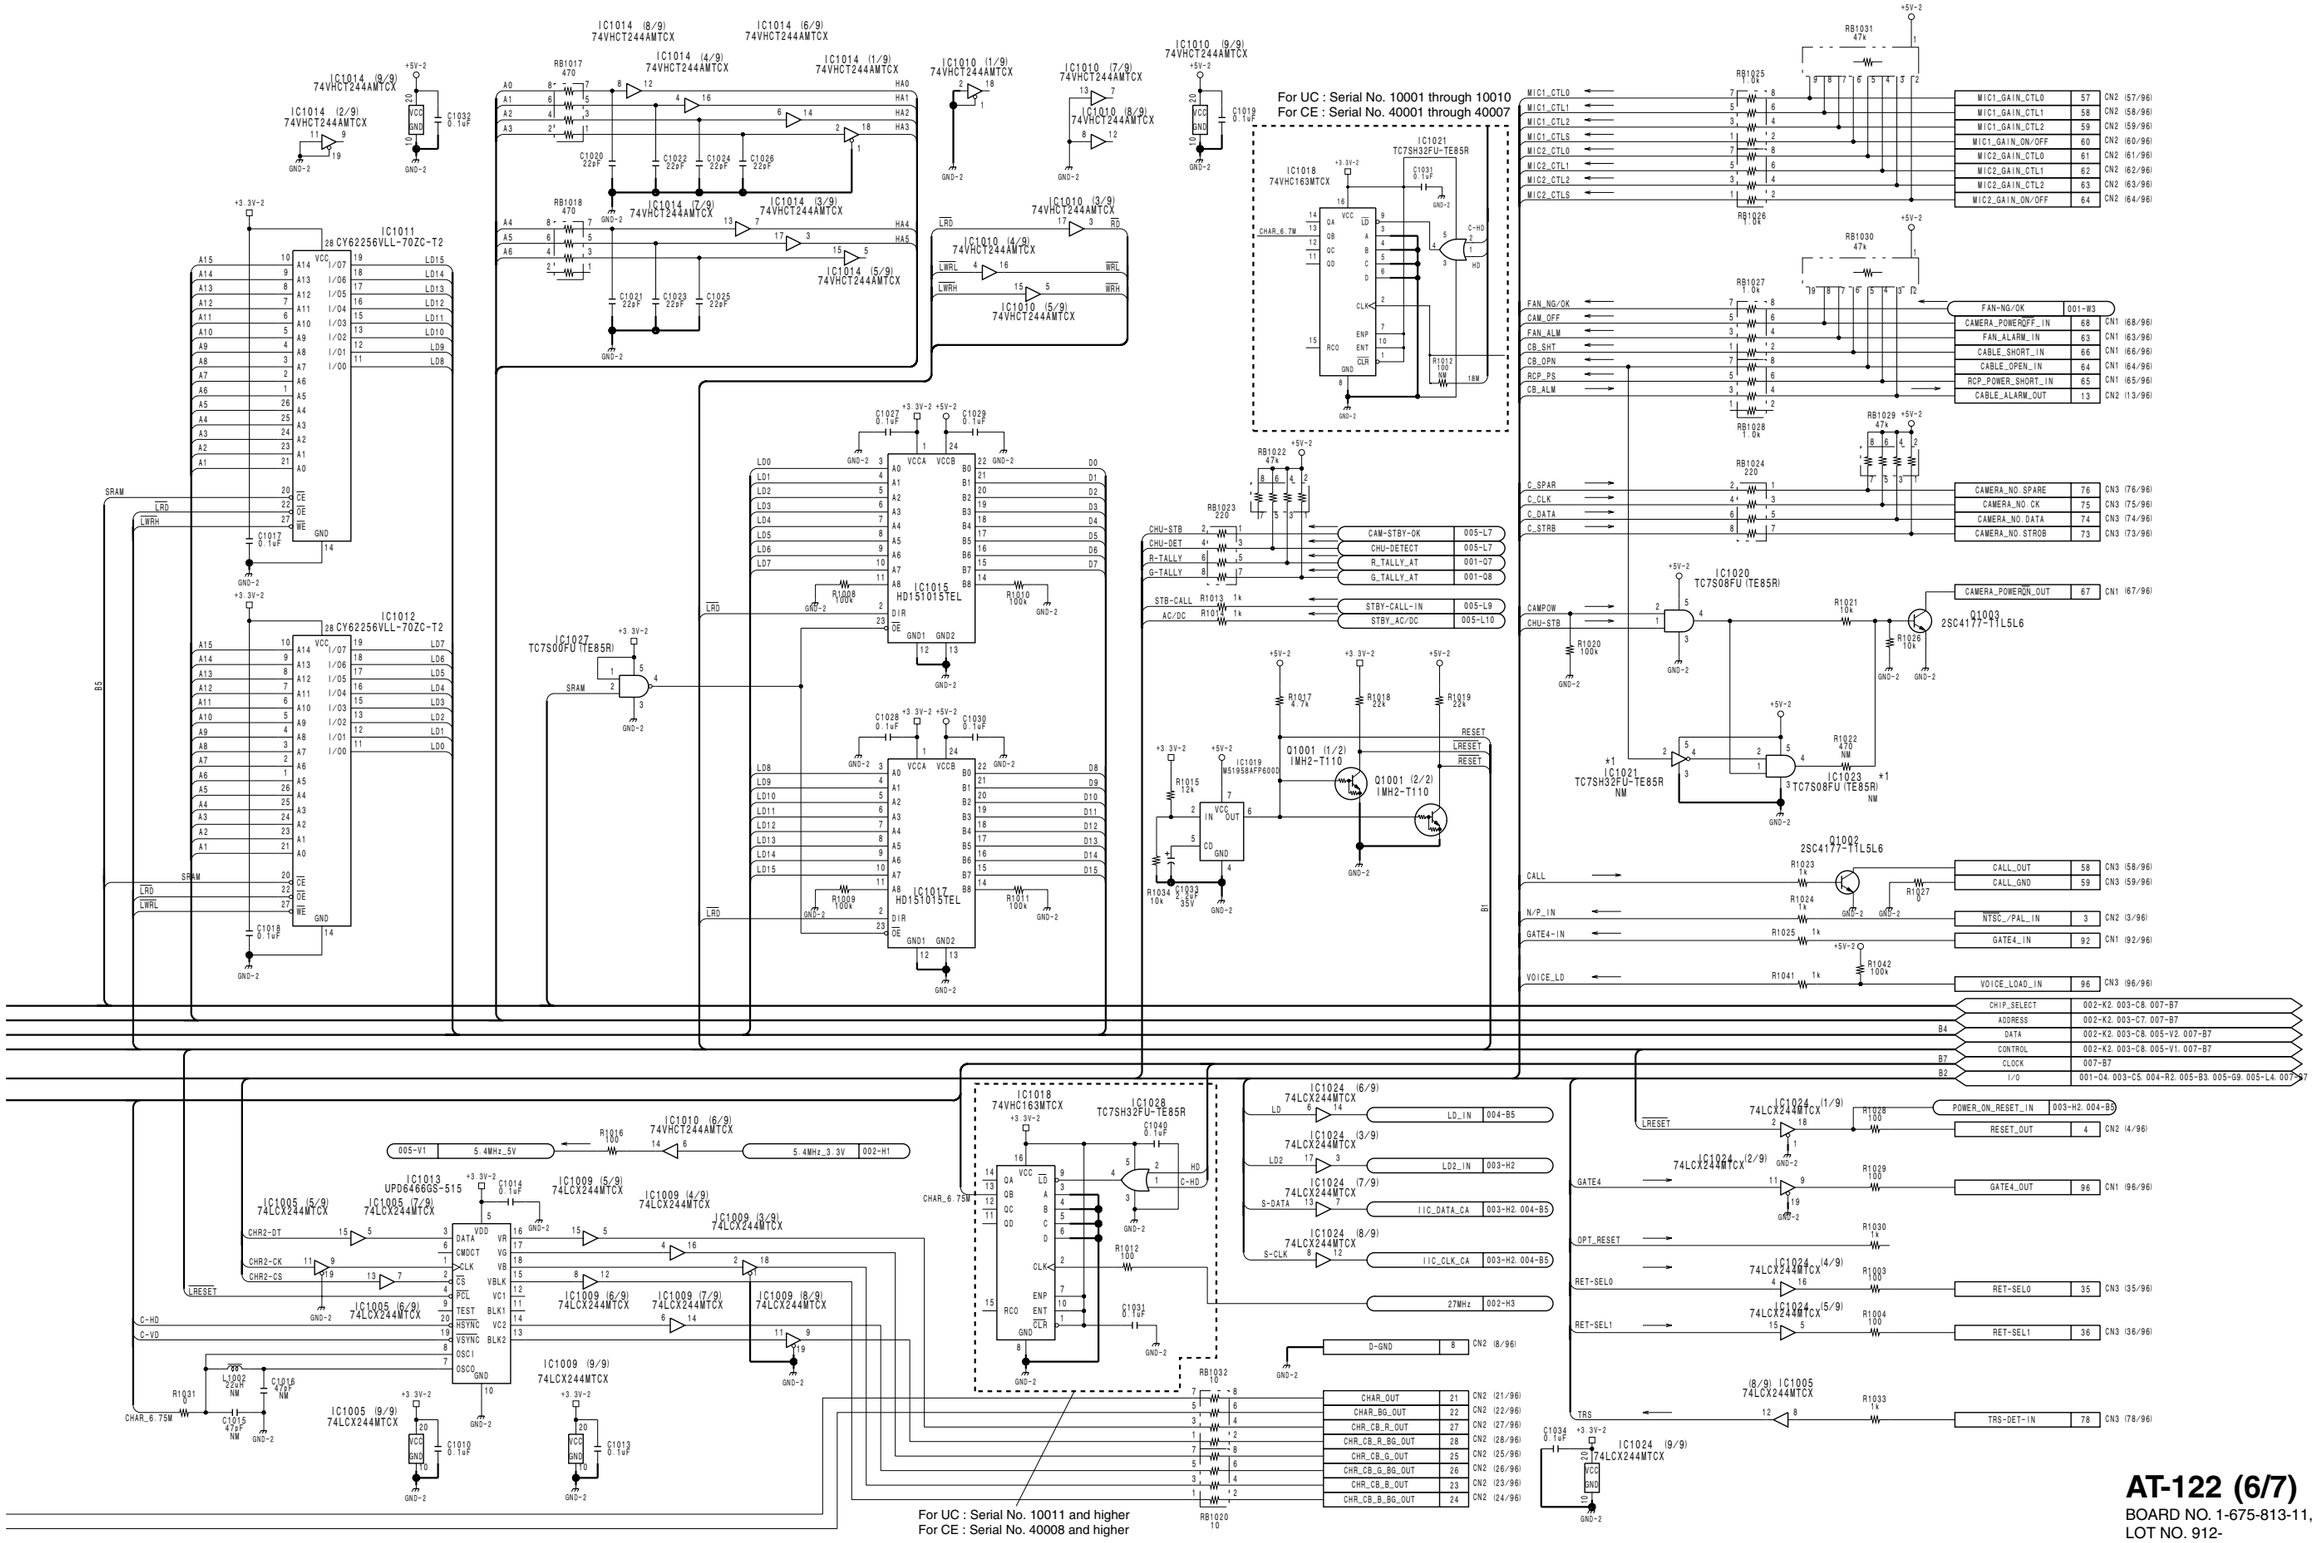

AT-122 (6/7)
BOARD NO. 1-675-813-11, 12
LOT NO. 912-
CCU-900_AT-122_013_6

AT-122 (7/7)

CCU-900 (UC) : S/N 10001 and Higher
CCU-900 (J) : S/N 30001 and Higher
CCU-900P (CE) : S/N 40001 and Higher

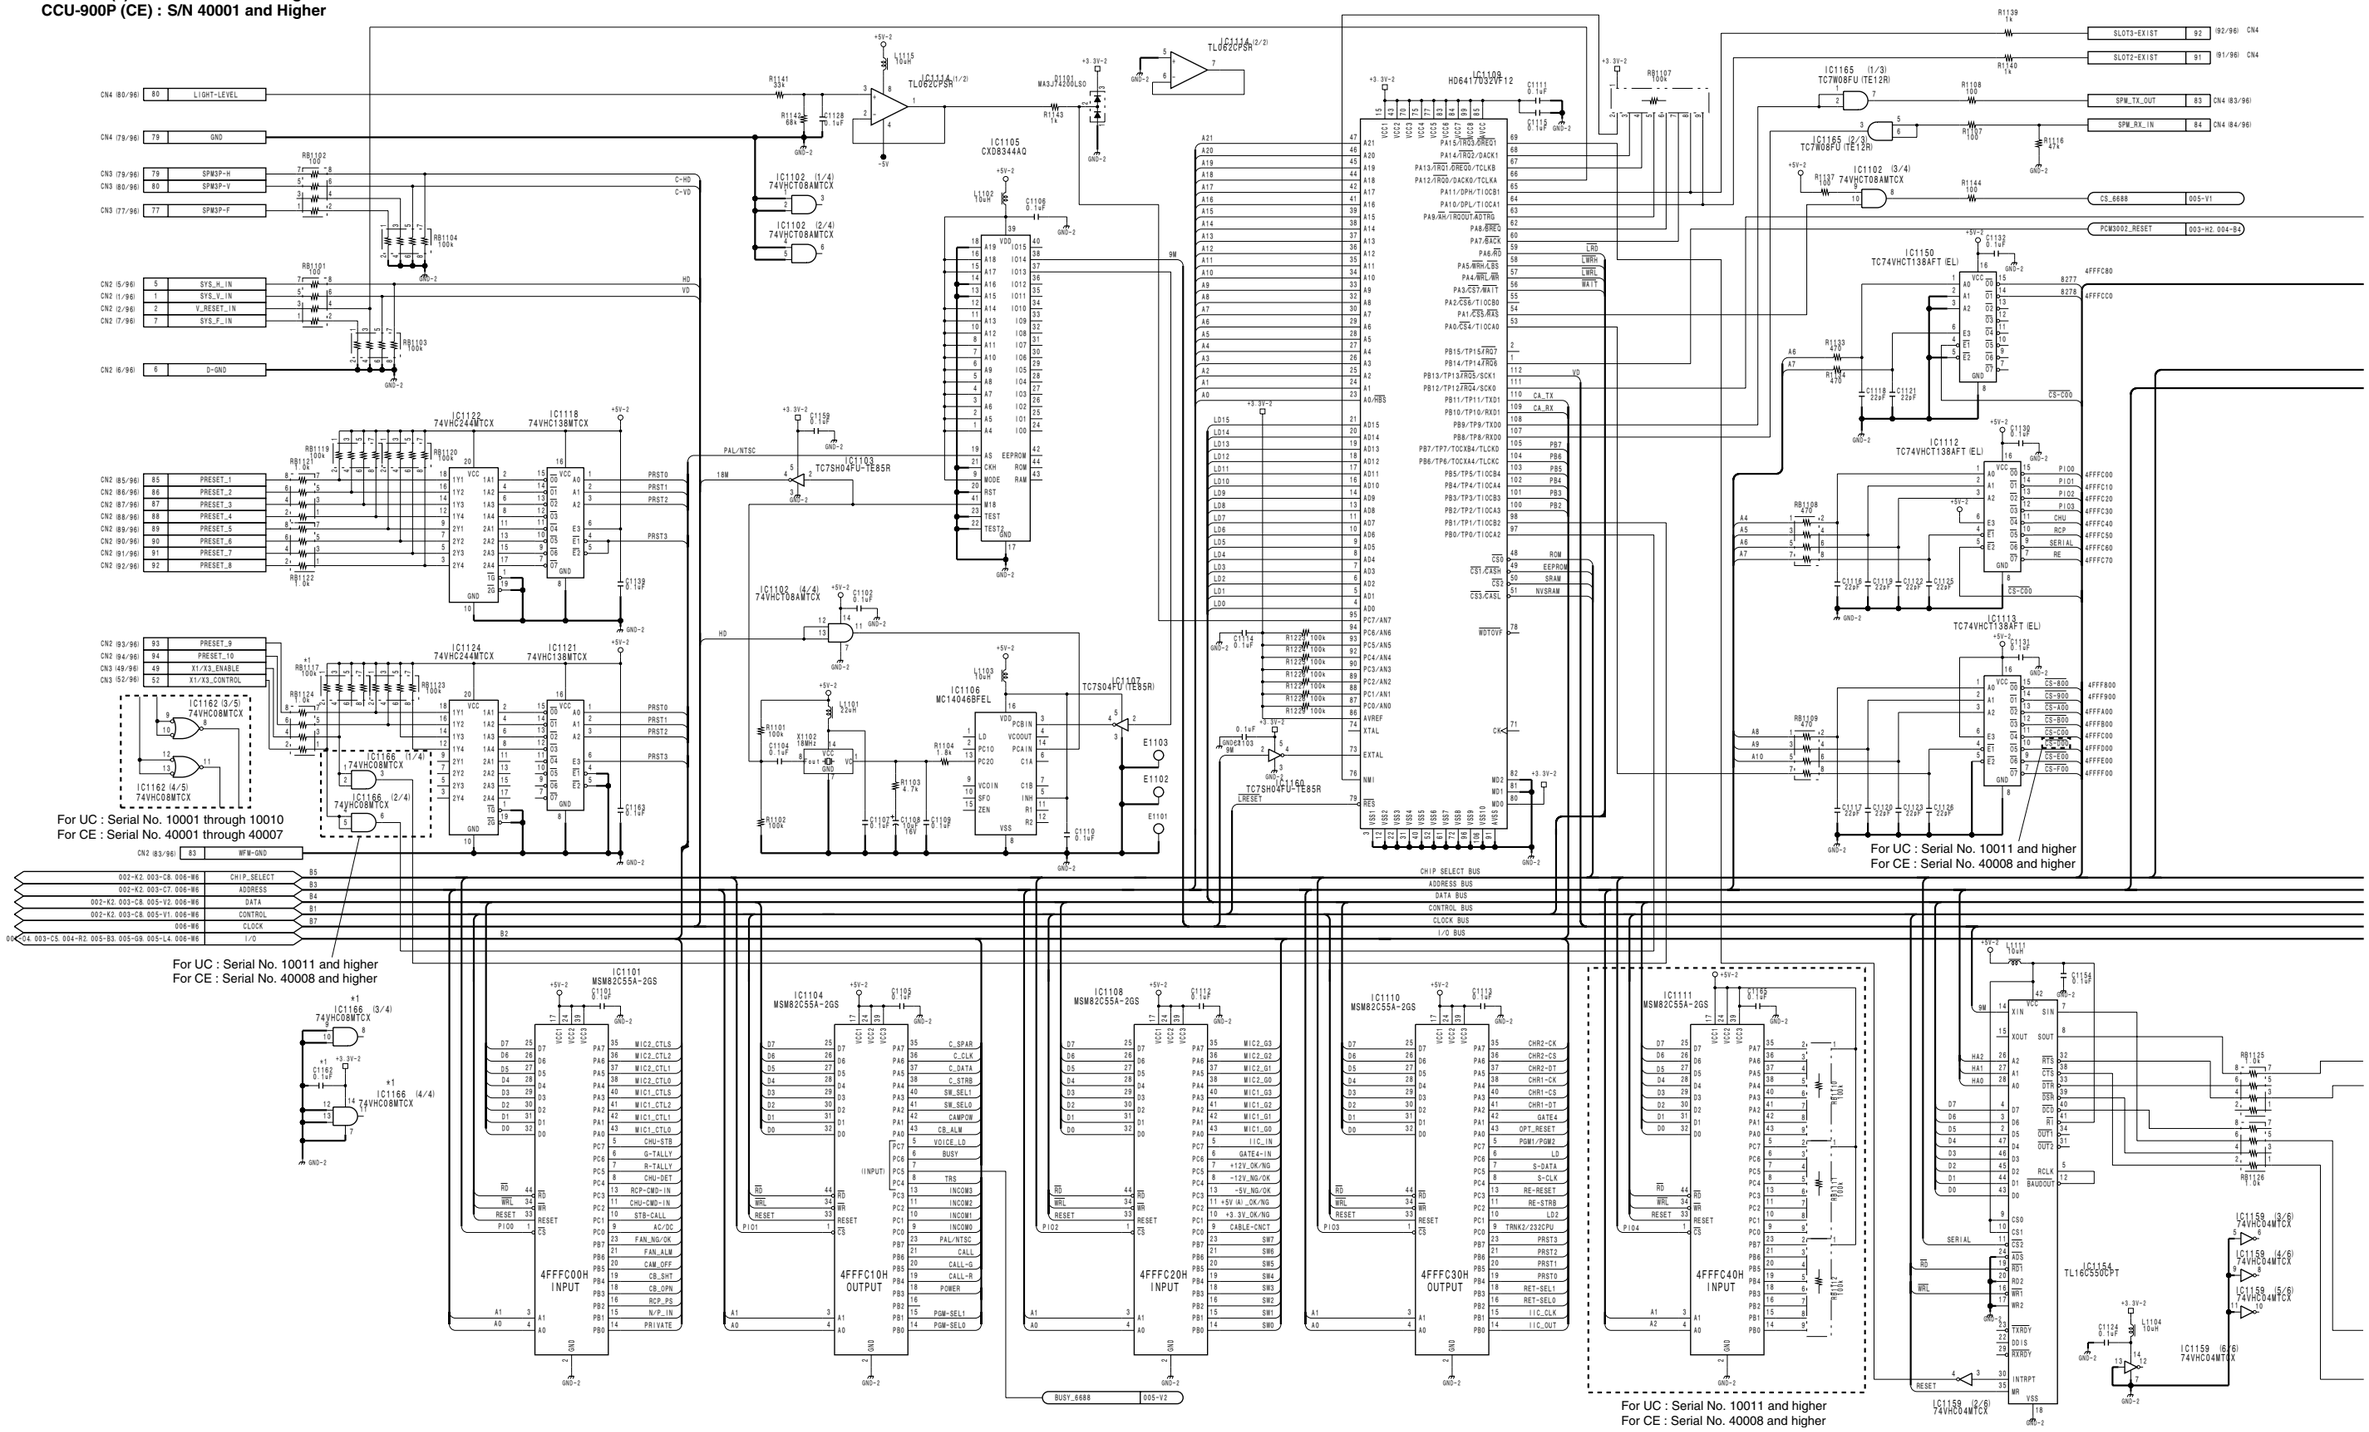

4-50

AT-122 (7/7)

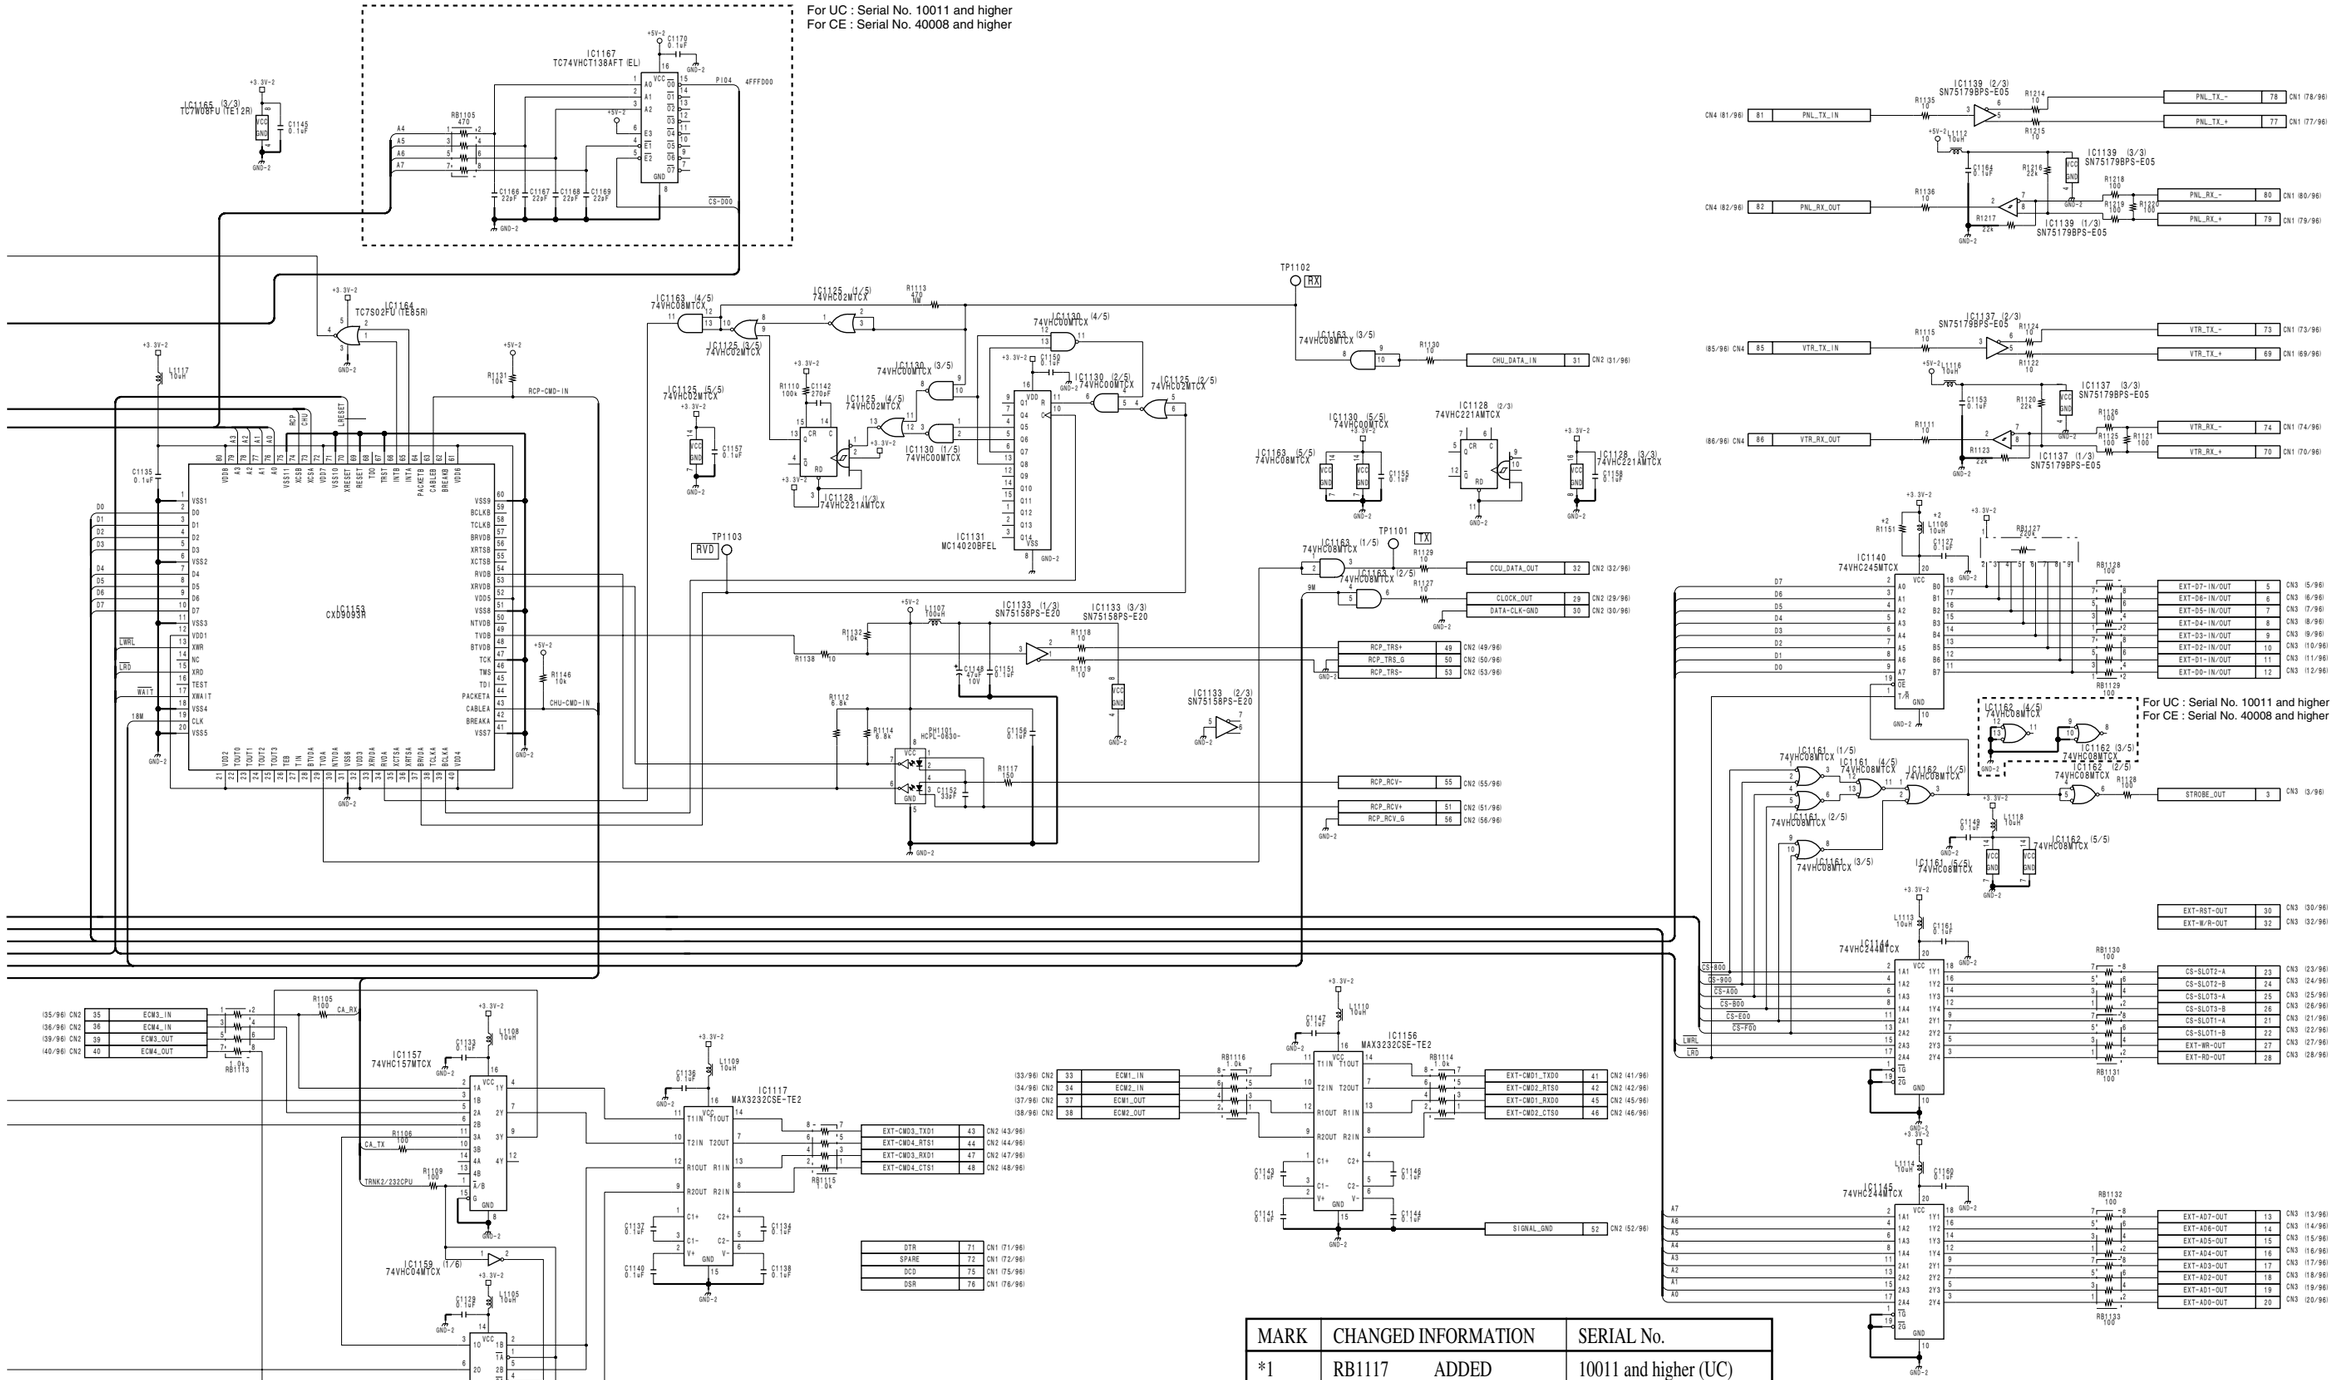

MARK	CHANGED INFORMATION		SERIAL No.
*1	RB1117	ADDED	10011 and higher (UC)
	C1162	ADDED	40008 and higher (CE)
	IC1166	ADDED	
*2	L1106	DELETED	10022 and higher (UC)
	R1151	ADDED	30004 and higher (J)
			40045 and higher (CE)

AT-122 (7/7)
BOARD NO. 1-675-813-11, 12
LOT NO. 912-
CCU-900_AT-122_013_7

CCU-900 (UC) : S/N 10001 and Higher
CCU-900 (J) : S/N 30001 and Higher
CCU-900P (CE) : S/N 40001 and Higher

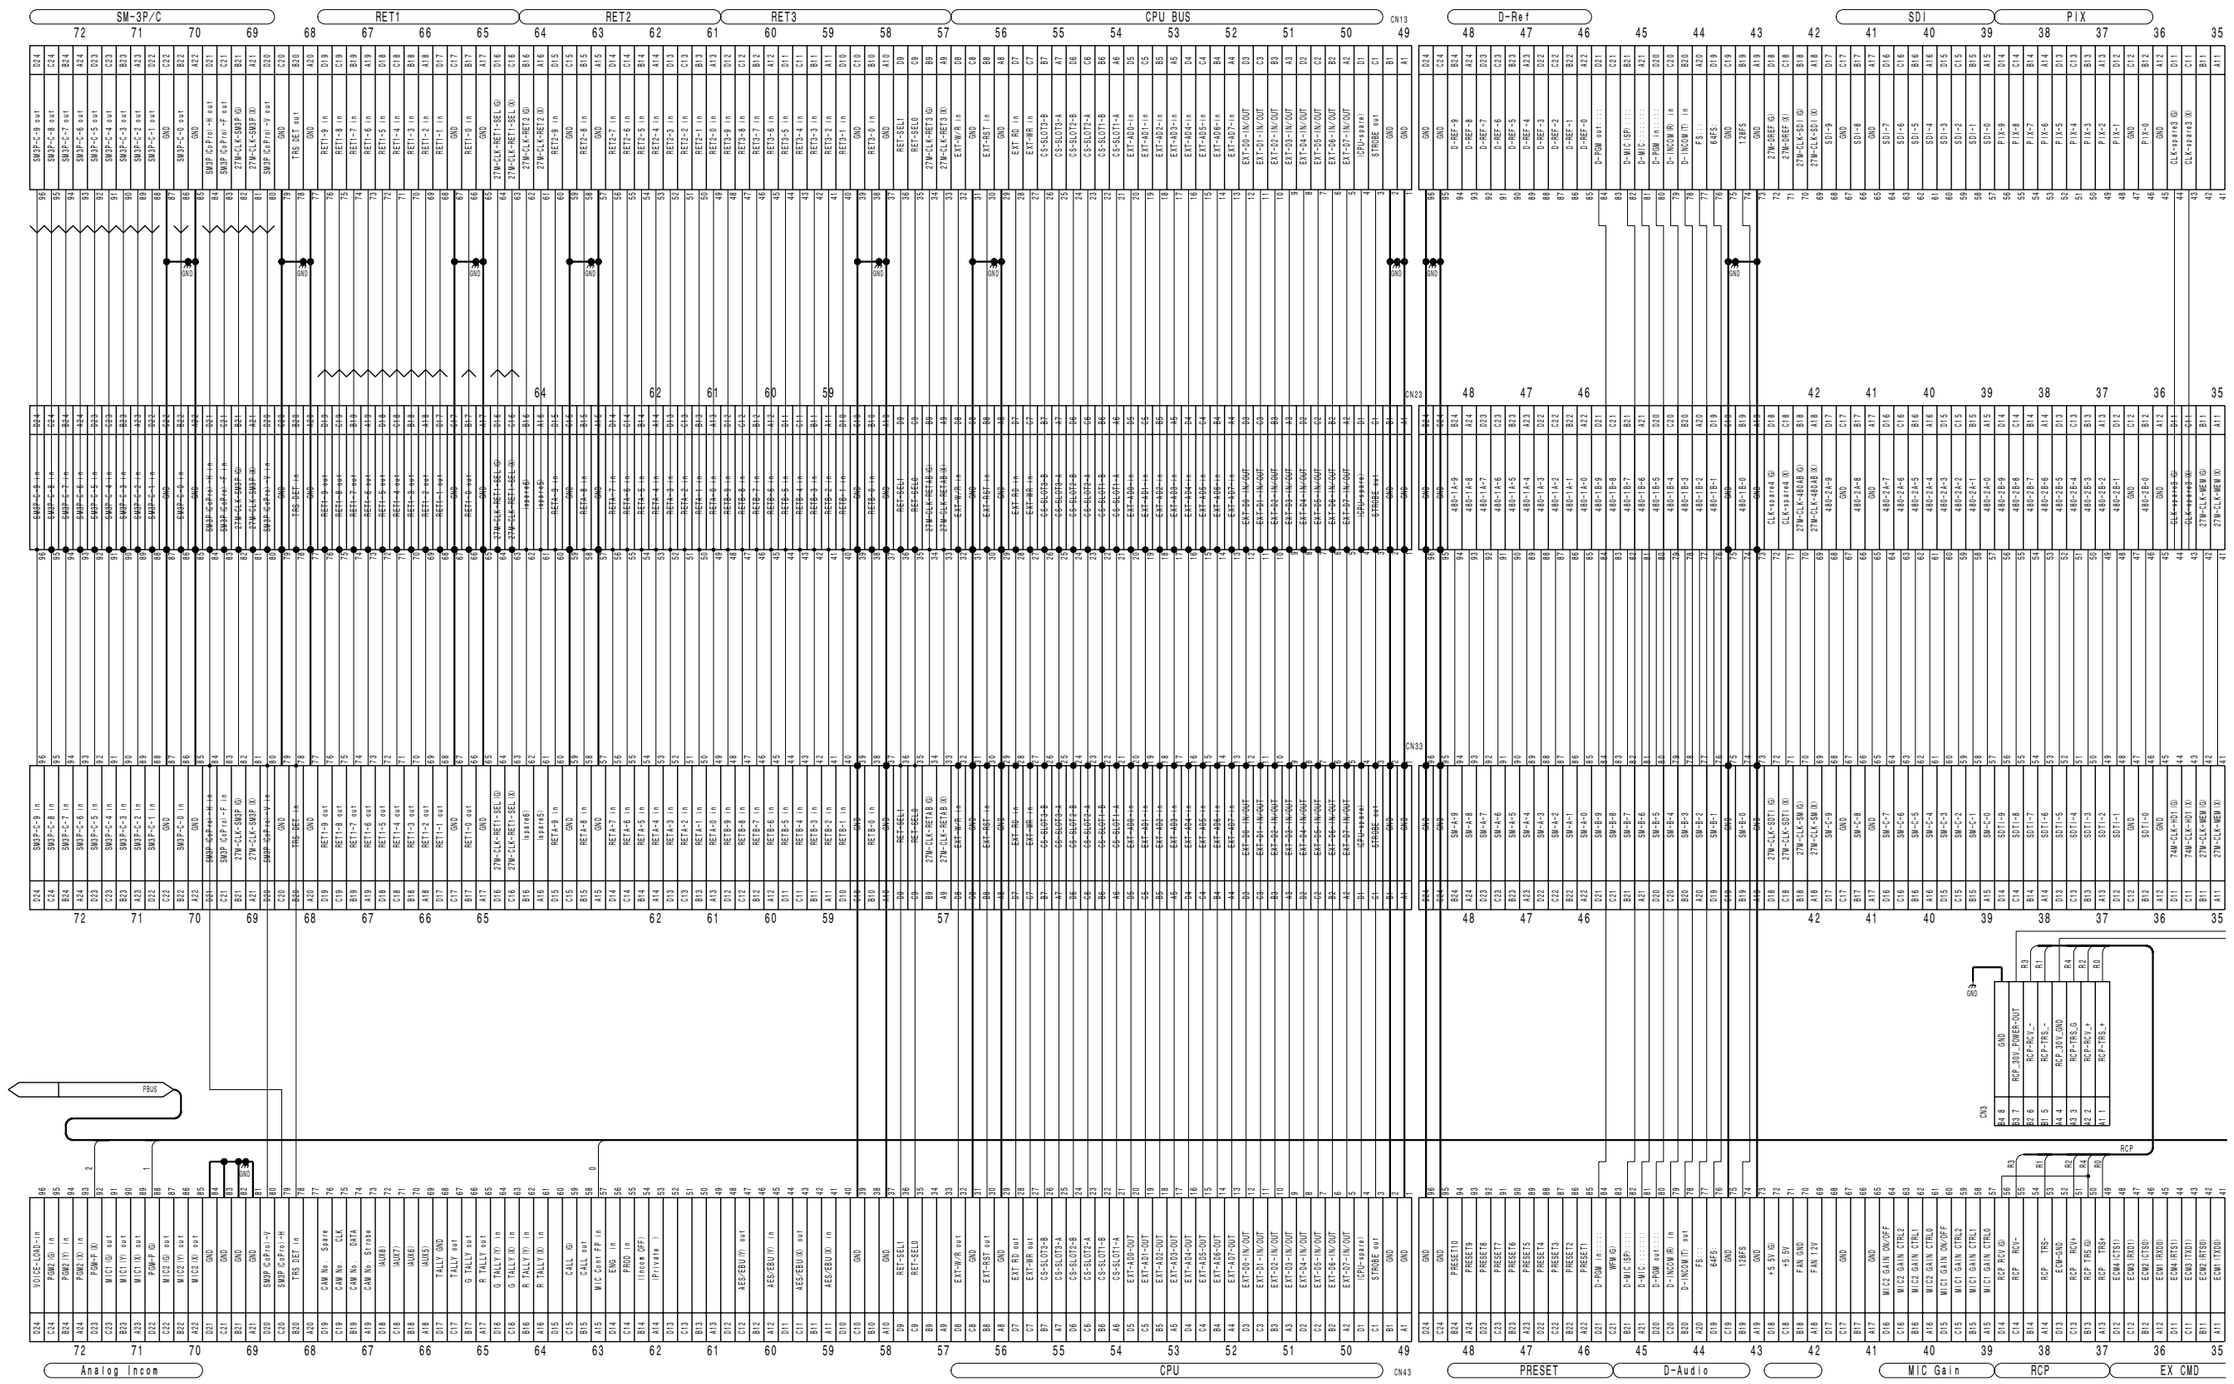

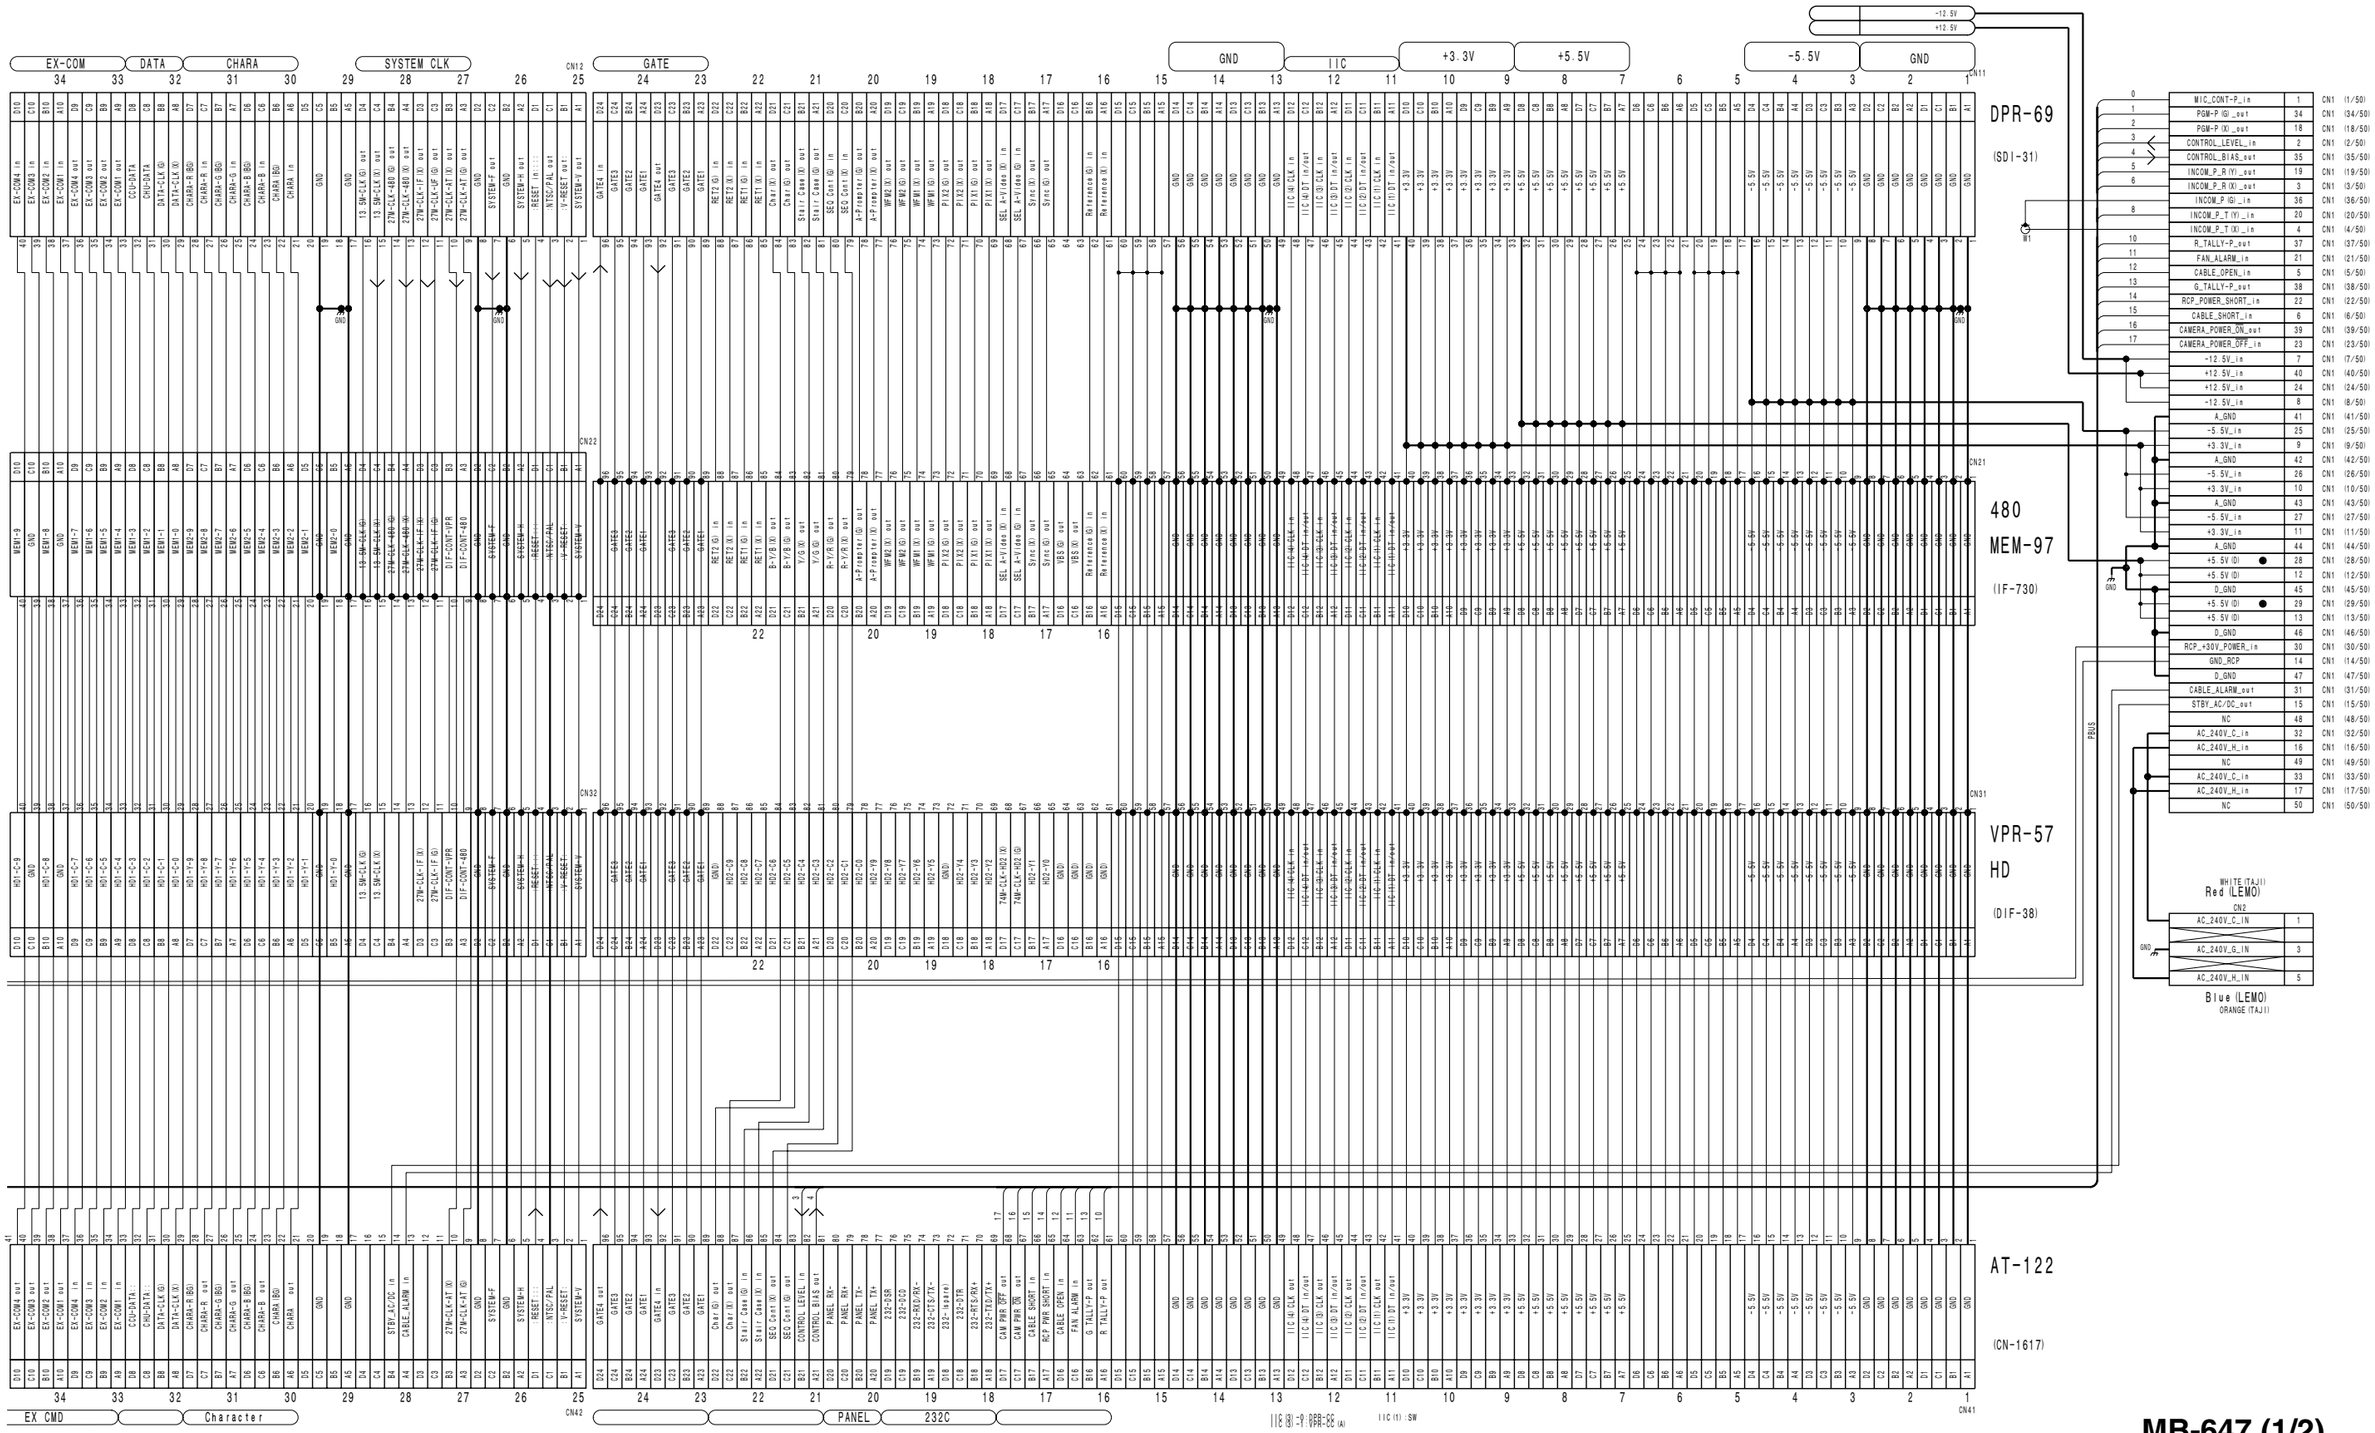

MB-647 (1/2)

BOARD NO. 1-675-812-12, 13
LOT NO. 912-

CCU-900_MB-647_013_1

CCU-900 (UC) : S/N 10001 and Higher
CCU-900 (J) : S/N 30001 and Higher
CCU-900P (CE) : S/N 40001 and Higher

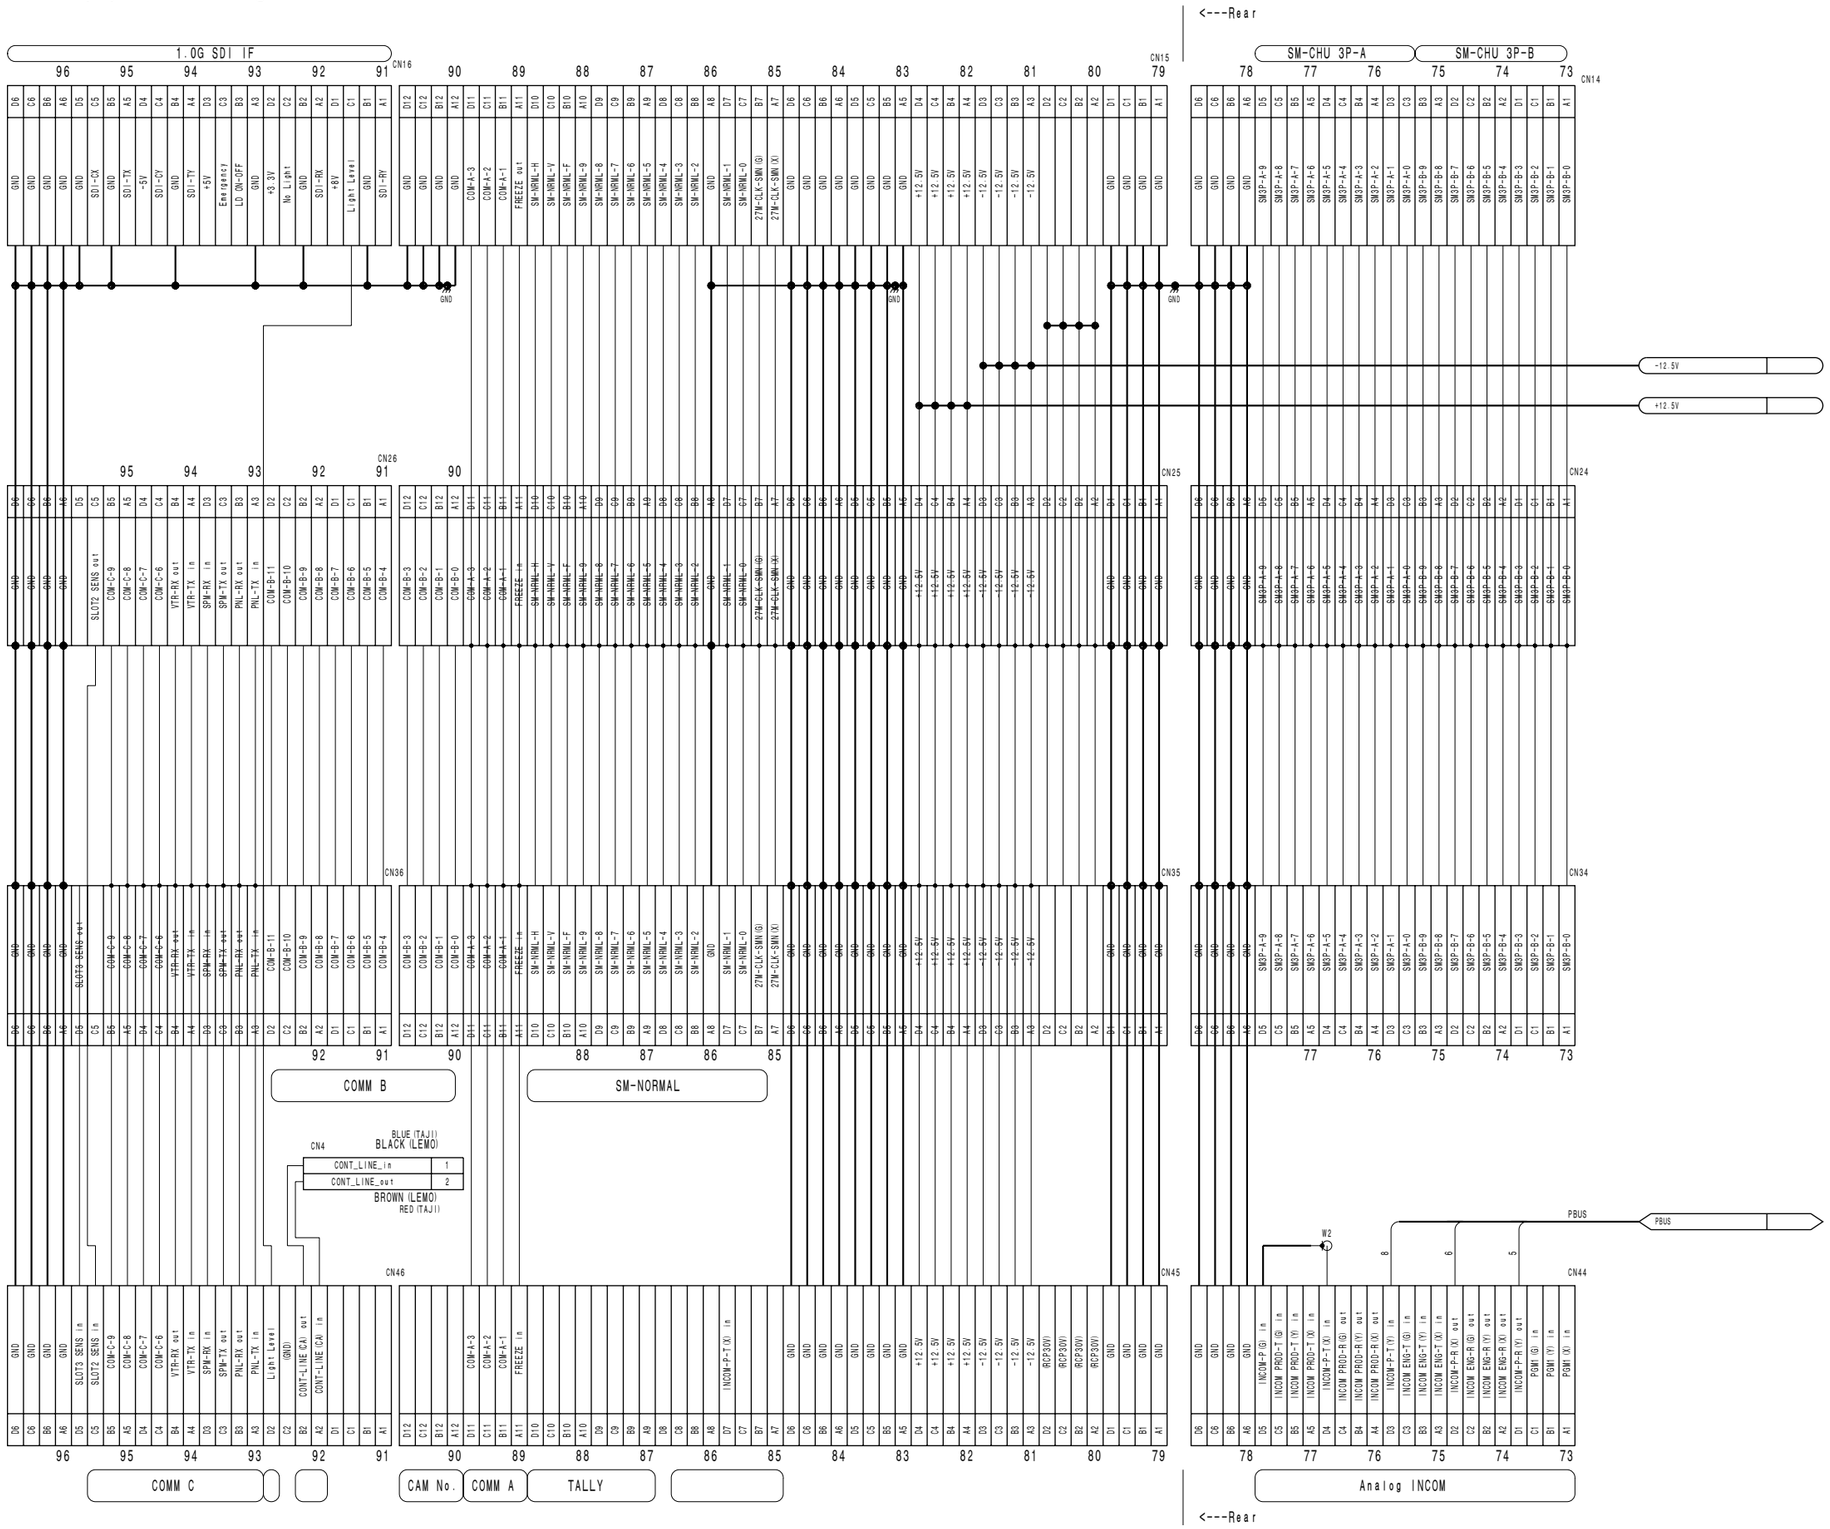

MB-647 (2/2)
BOARD NO. 1-675-812-12, 13
LOT NO. 912-
CCU-900_MB-647_013_2

CCU-900 (UC) : S/N 10001 and Higher
CCU-900 (J) : S/N 30001 and Higher
CCU-900P (CE) : S/N 40001 and Higher

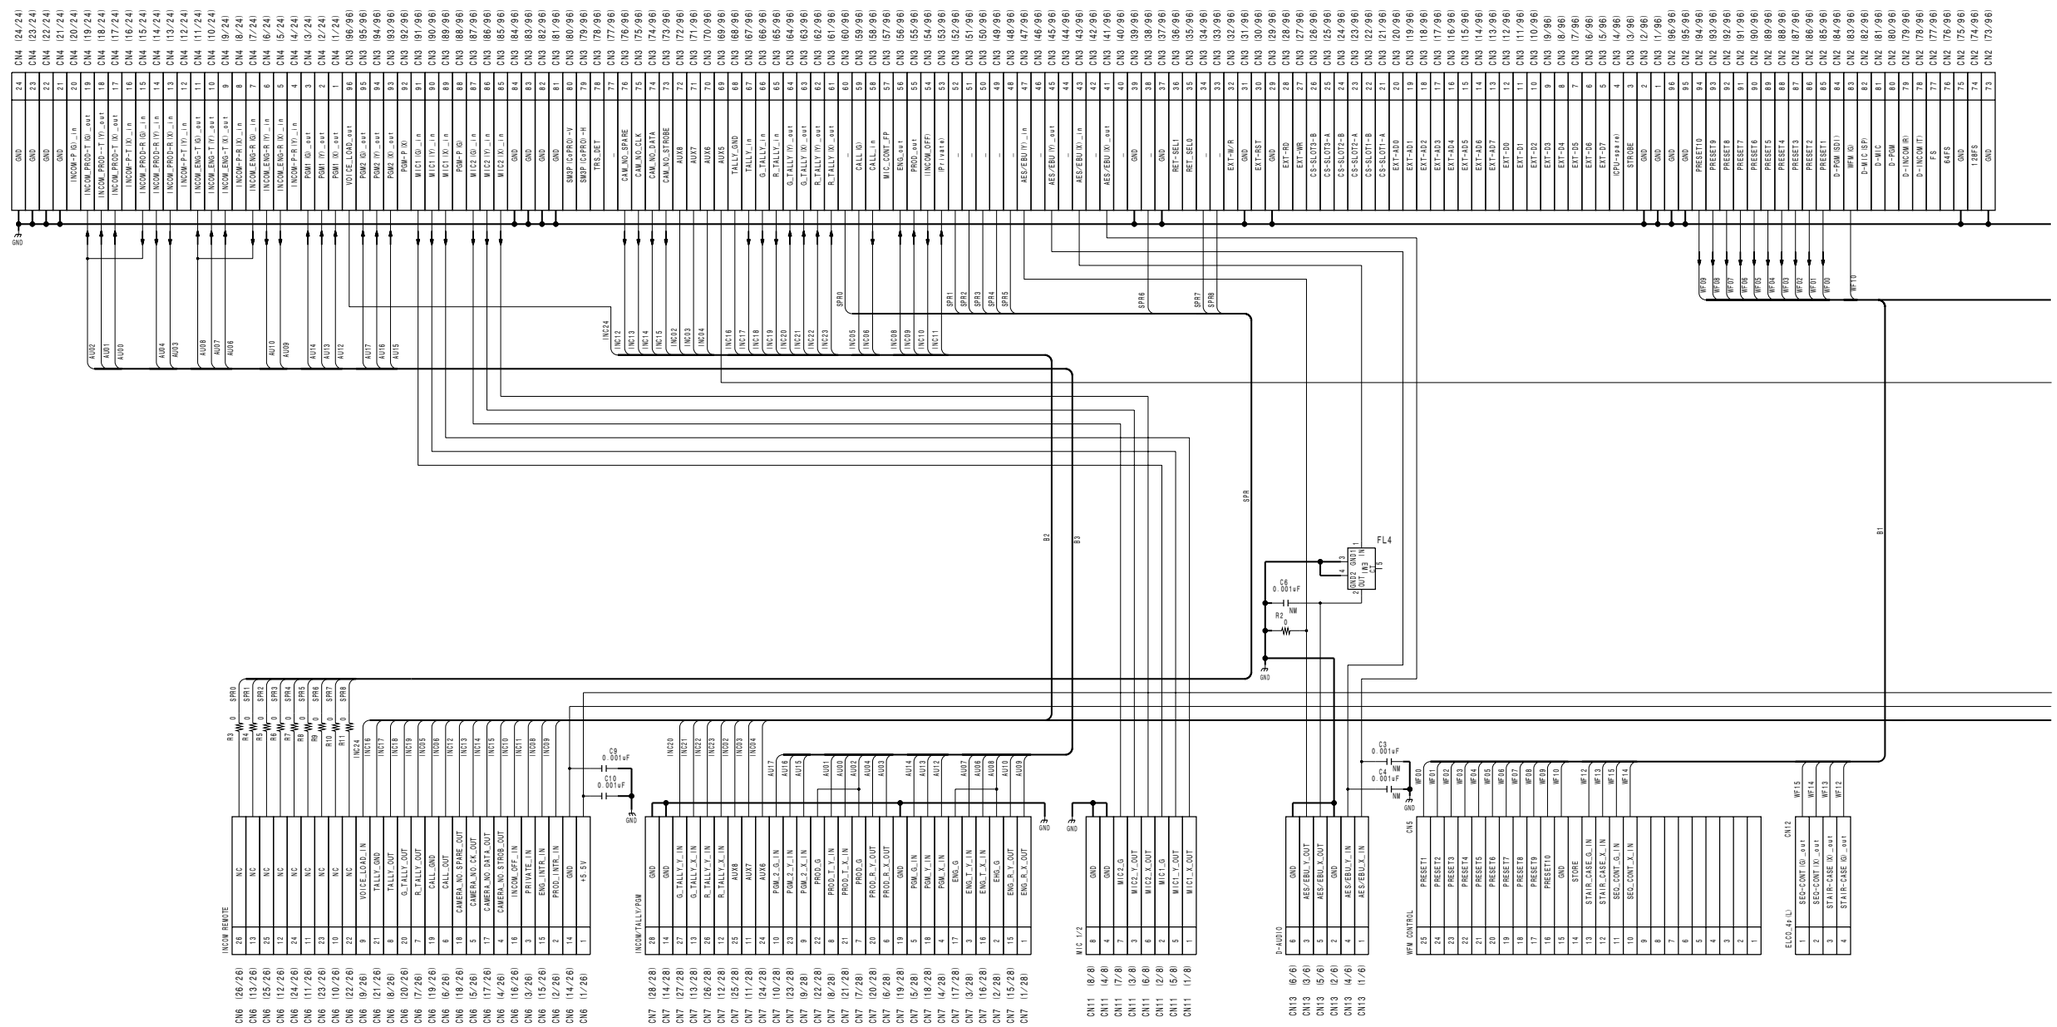

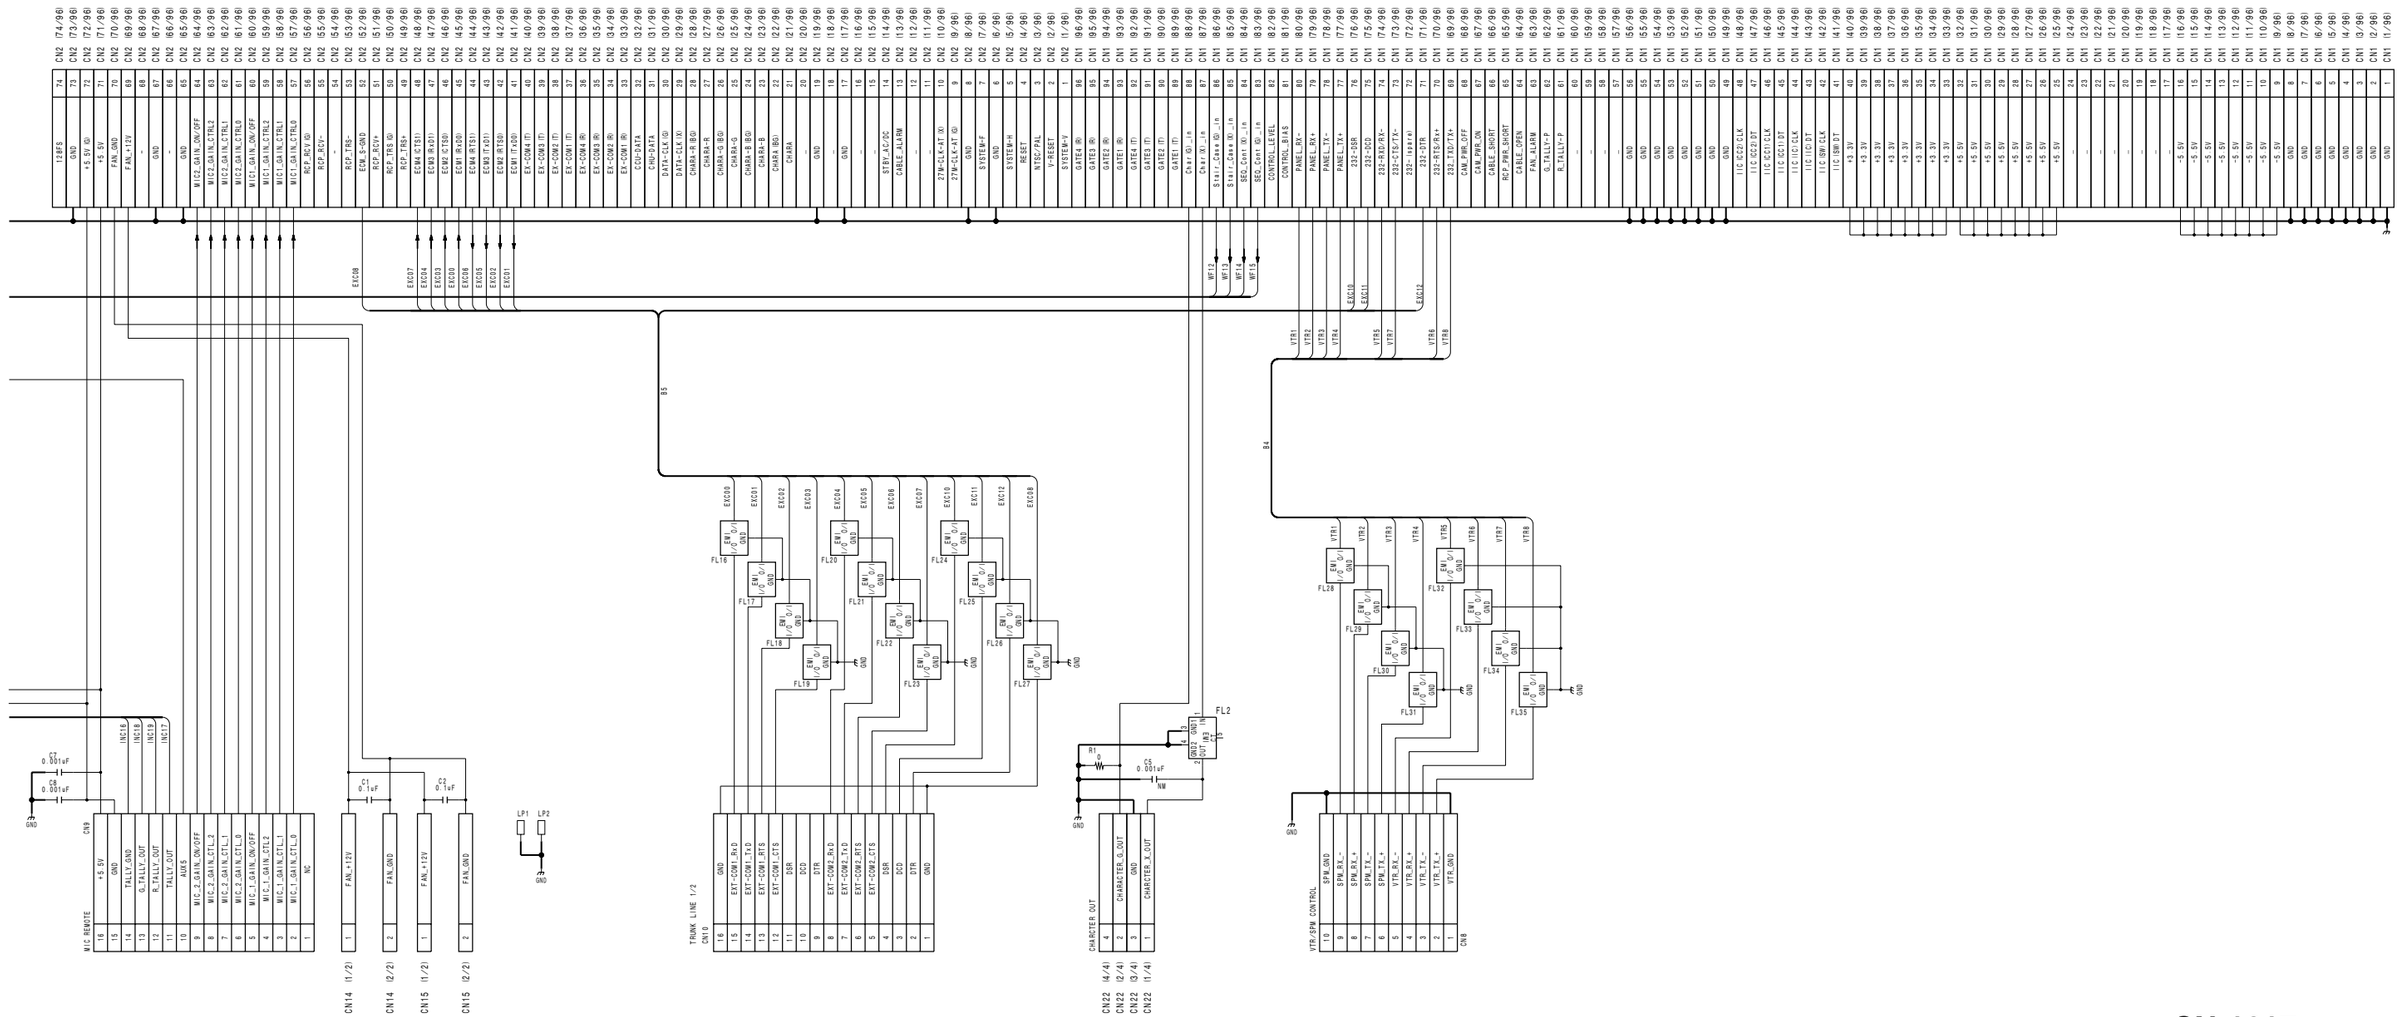
CN2 (74/96)
CN2 (73/96)
CN2 (72/96)
CN2 (71/96)
CN2 (70/96)
CN2 (69/96)
CN2 (68/96)
CN2 (67/96)
CN2 (66/96)
CN2 (65/96)
CN2 (64/96)
CN2 (63/96)
CN2 (62/96)
CN2 (61/96)
CN2 (60/96)
CN2 (59/96)
CN2 (58/96)
CN2 (57/96)
CN2 (56/96)
CN2 (55/96)
CN2 (54/96)
CN2 (53/96)
CN2 (52/96)
CN2 (51/96)
CN2 (50/96)
CN2 (49/96)
CN2 (48/96)
CN2 (47/96)
CN2 (46/96)
CN2 (45/96)
CN2 (44/96)
CN2 (43/96)
CN2 (42/96)
CN2 (41/96)
CN2 (40/96)
CN2 (39/96)
CN2 (38/96)
CN2 (37/96)
CN2 (36/96)
CN2 (35/96)
CN2 (34/96)
CN2 (33/96)
CN2 (32/96)
CN2 (31/96)
CN2 (30/96)
CN2 (29/96)
CN2 (28/96)
CN2 (27/96)
CN2 (26/96)
CN2 (25/96)
CN2 (24/96)
CN2 (23/96)
CN2 (22/96)
CN2 (21/96)
CN2 (20/96)
CN2 (19/96)
CN2 (18/96)
CN2 (17/96)
CN2 (16/96)
CN2 (15/96)
CN2 (14/96)
CN2 (13/96)
CN2 (12/96)
CN2 (11/96)
CN2 (10/96)
CN2 (9/96)
CN2 (8/96)
CN2 (7/96)
CN2 (6/96)
CN2 (5/96)
CN2 (4/96)
CN2 (3/96)
CN2 (2/96)
CN2 (1/96)
I28FS
GND
+5.5V
+5.5V
FAN_GND
FAN_+12V
-
-
GND
WIC2_GAIN_ON/OFF
WIC2_GAIN_CTRL2
WIC2_GAIN_CTRL1
WIC2_GAIN_CTRL0
WIC1_GAIN_ON/OFF
WIC1_GAIN_CTRL2
WIC1_GAIN_CTRL1
WIC1_GAIN_CTRL0
MCP_REV0
MCP_REV1
MCP_TRS-
ECM_S-OUT
MCP_REV+
MCP_TRS+
ECM_S-IN
ECM_RTS(-)
ECM_TxD(-)
ECM_RxD(-)
EX-COM4(T)
EX-COM3(T)
EX-COM2(T)
EX-COM1(T)
EX-COM4(R)
EX-COM3(R)
EX-COM2(R)
EX-COM1(R)
CCU-DATA
CHU-DATA
DATA-CLK-OUT
DATA-CLK-IN
CHARA+R BGU
CHARA-R
CHARA+G BGU
CHARA-G
CHARA+B BGU
CHARA-B
CHARA BGU
CHARA
-
GND
GND
-
-
STBY_AC/DC
CABLE_ALARM
-
-
-
27M-CLK-AT (X)
27M-CLK-AT (G)
GND
SYSTEM+F
GND
SYSTEM+H
RESET
NTSC/PAL
V-RESET
SYSTEM+V
GATE4 (R)
GATE3 (R)
GATE2 (R)
GATE1 (R)
GATE4 (T)
GATE3 (T)
GATE2 (T)
GATE1 (T)
Ch4+(Q)_in
Ch3+(Q)_in
Ch2+(Q)_in
Ch1+(Q)_in
Start_Ch4+(Q)_in
Start_Ch3+(Q)_in
SCCL_Ch4+(Q)_in
SCCL_Ch3+(Q)_in
CONTROL_LEVEL
CONTROL_DATA
PANEL_RX+
PANEL_RX-
PANEL_TX+
PANEL_TX-
232-DSR
232-DCD
232-RXD/RX+
232-CTS/TX+
232-+12V
232-DTR
232-RTS/RX+
232-TXD/TX+
CAM_PWR_OFF
CAM_PWR_ON
CABLE_SHORT
MCP_PWR_SHORT
CABLE_OPEN
FAN_ALARM
G_TALLY+P
R_TALLY+P
-
-
-
-
GND
GND
GND

CN-1618, CN-1619, CN-1635, CN-1636, CN-1637

CCU-900 (UC) : S/N 10001 and Higher
CCU-900 (J) : S/N 30001 and Higher
CCU-900P (CE) : S/N 40001 and Higher

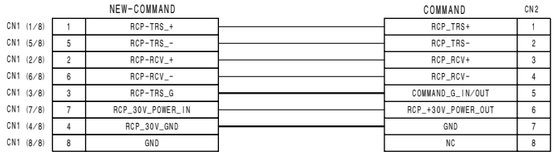

CN-1618

BOARD NO. 1-676-623-11
LOT NO. 912-
CCU-900_CN-1618_011_1

CCU-900 (UC) : S/N 10001 and Higher
CCU-900 (J) : S/N 30001 and Higher
CCU-900P (CE) : S/N 40001 and Higher



CN-1619

BOARD NO. 1-676-905-11
LOT NO. 912-
CCU-900_CN-1619_011_1

CCU-900 (UC) : S/N 10001 and Higher
CCU-900 (J) : S/N 30001 and Higher
CCU-900P (CE) : S/N 40001 and Higher

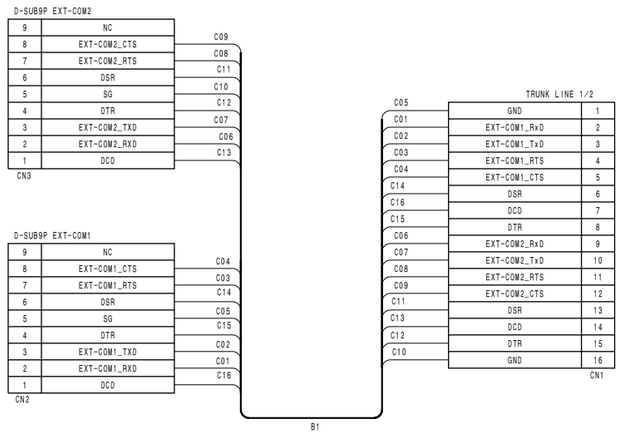

CN-1635

BOARD NO. 1-676-624-11
LOT NO. 912-
CCU-900_CN-1635_011_1

CCU-900 (UC) : S/N 10001 and Higher
CCU-900 (J) : S/N 30001 and Higher
CCU-900P (CE) : S/N 40001 and Higher

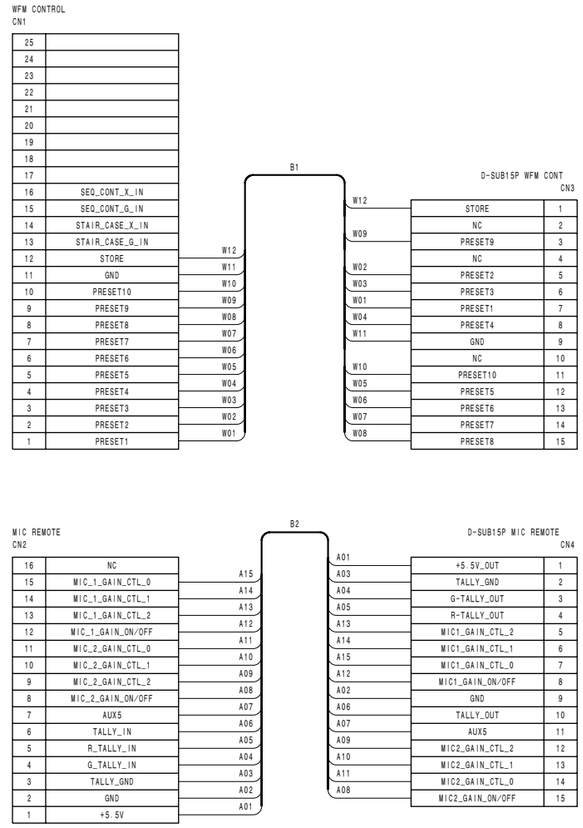

CN-1636

BOARD NO. 1-676-622-11
LOT NO. 912-
CCU-900_CN-1636_011_1

CCU-900 (UC) : S/N 10001 and Higher
CCU-900 (J) : S/N 30001 and Higher
CCU-900P (CE) : S/N 40001 and Higher

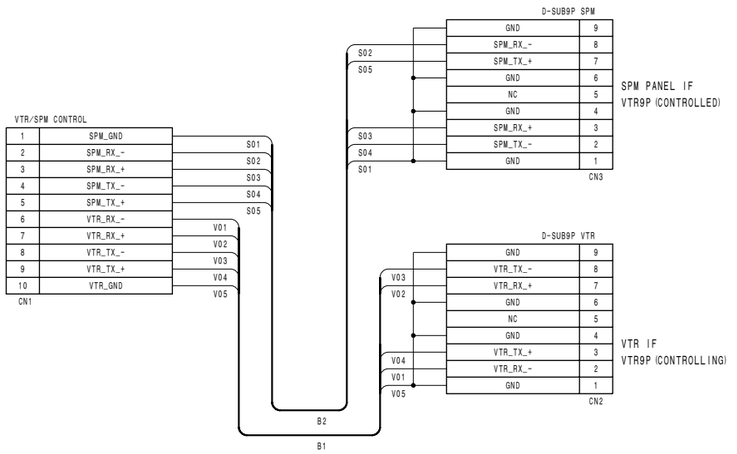

CN-1637

BOARD NO. 1-676-620-11
LOT NO. 912-
CCU-900_CN-1637_011_1

4-58

CN-1638, CN-1925

CCU-900 (UC) : S/N 10001 and Higher
CCU-900 (J) : S/N 30001 and Higher
CCU-900P (CE) : S/N 40001 and Higher

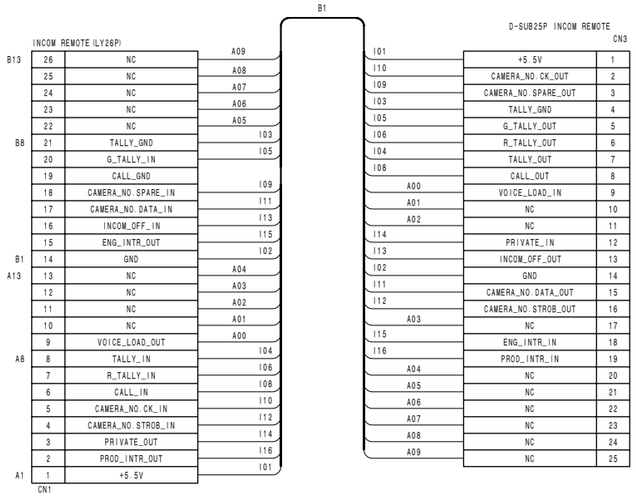

CN-1638

BOARD NO. 1-676-621-11
LOT NO. 912-
CCU-900_CN-1638_011_1

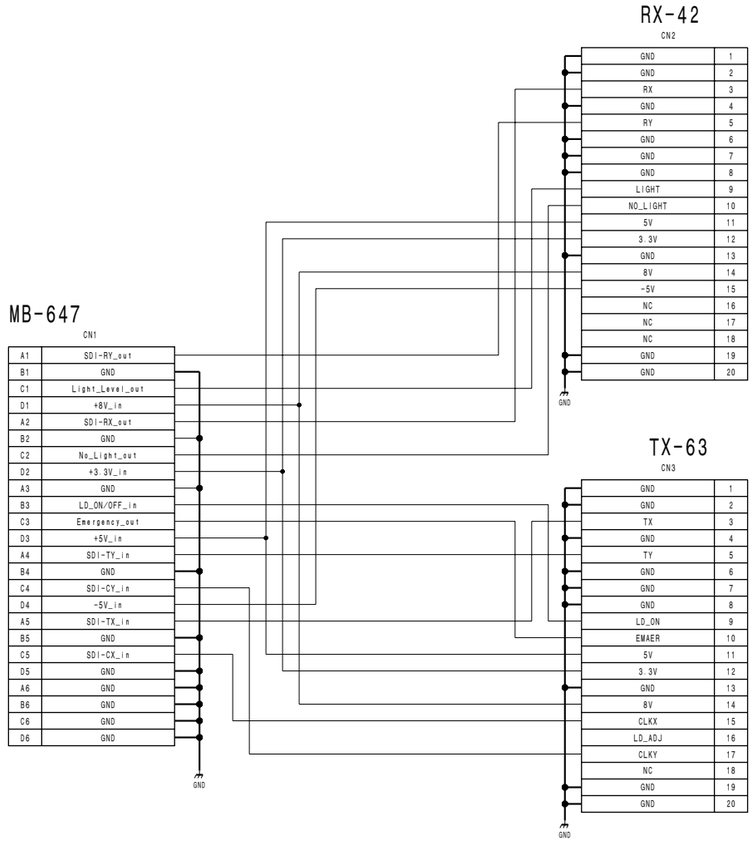

CN-1925

BOARD NO. 1-676-626-11
LOT NO. 912-
CCU-900_CN-1925_011_1

Frame Wiring (1/2)

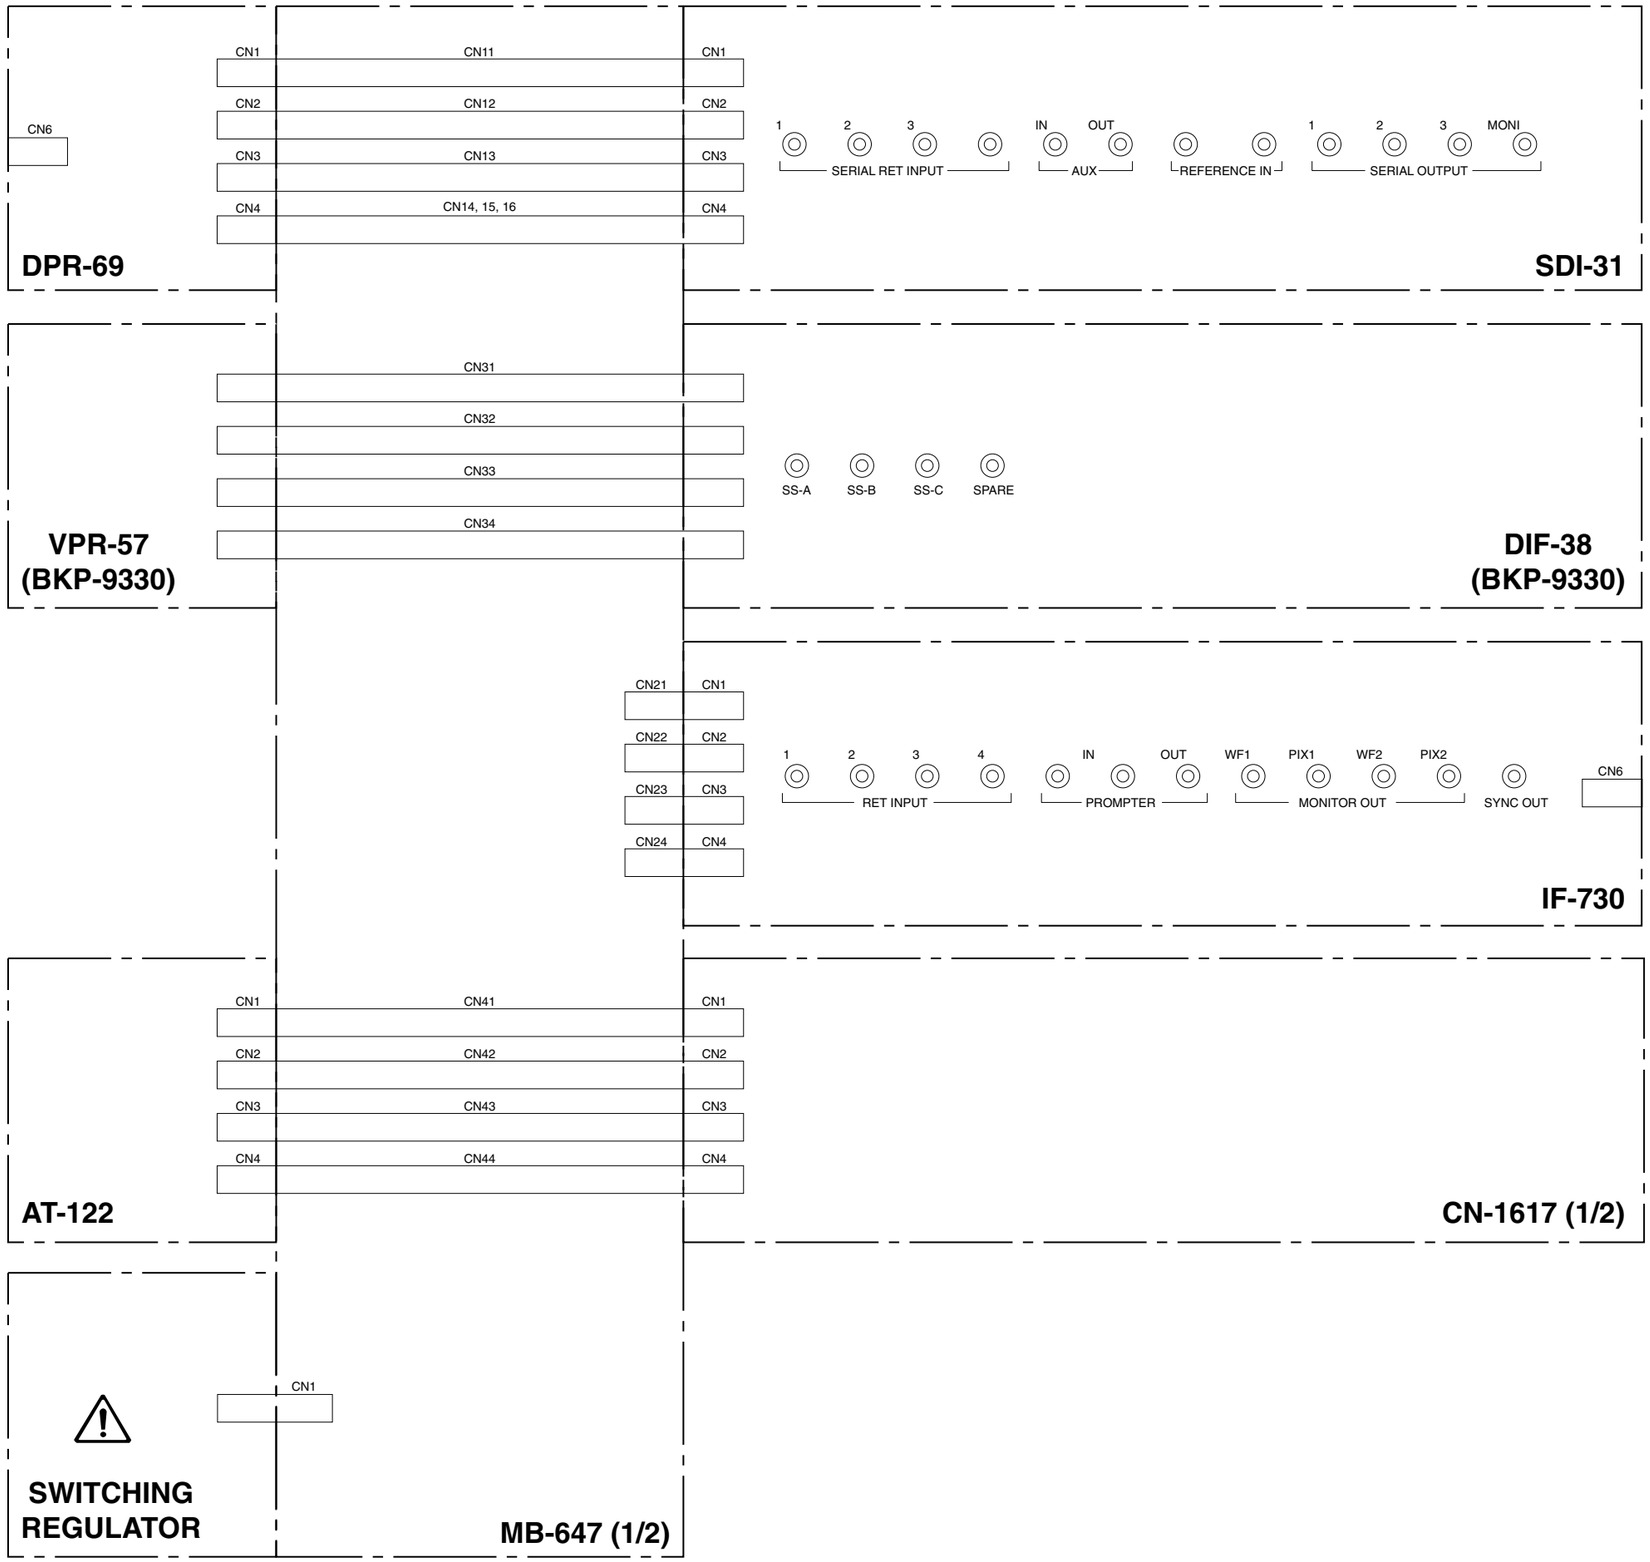

Frame Wiring (1/2)

Frame Wiring (2/2)

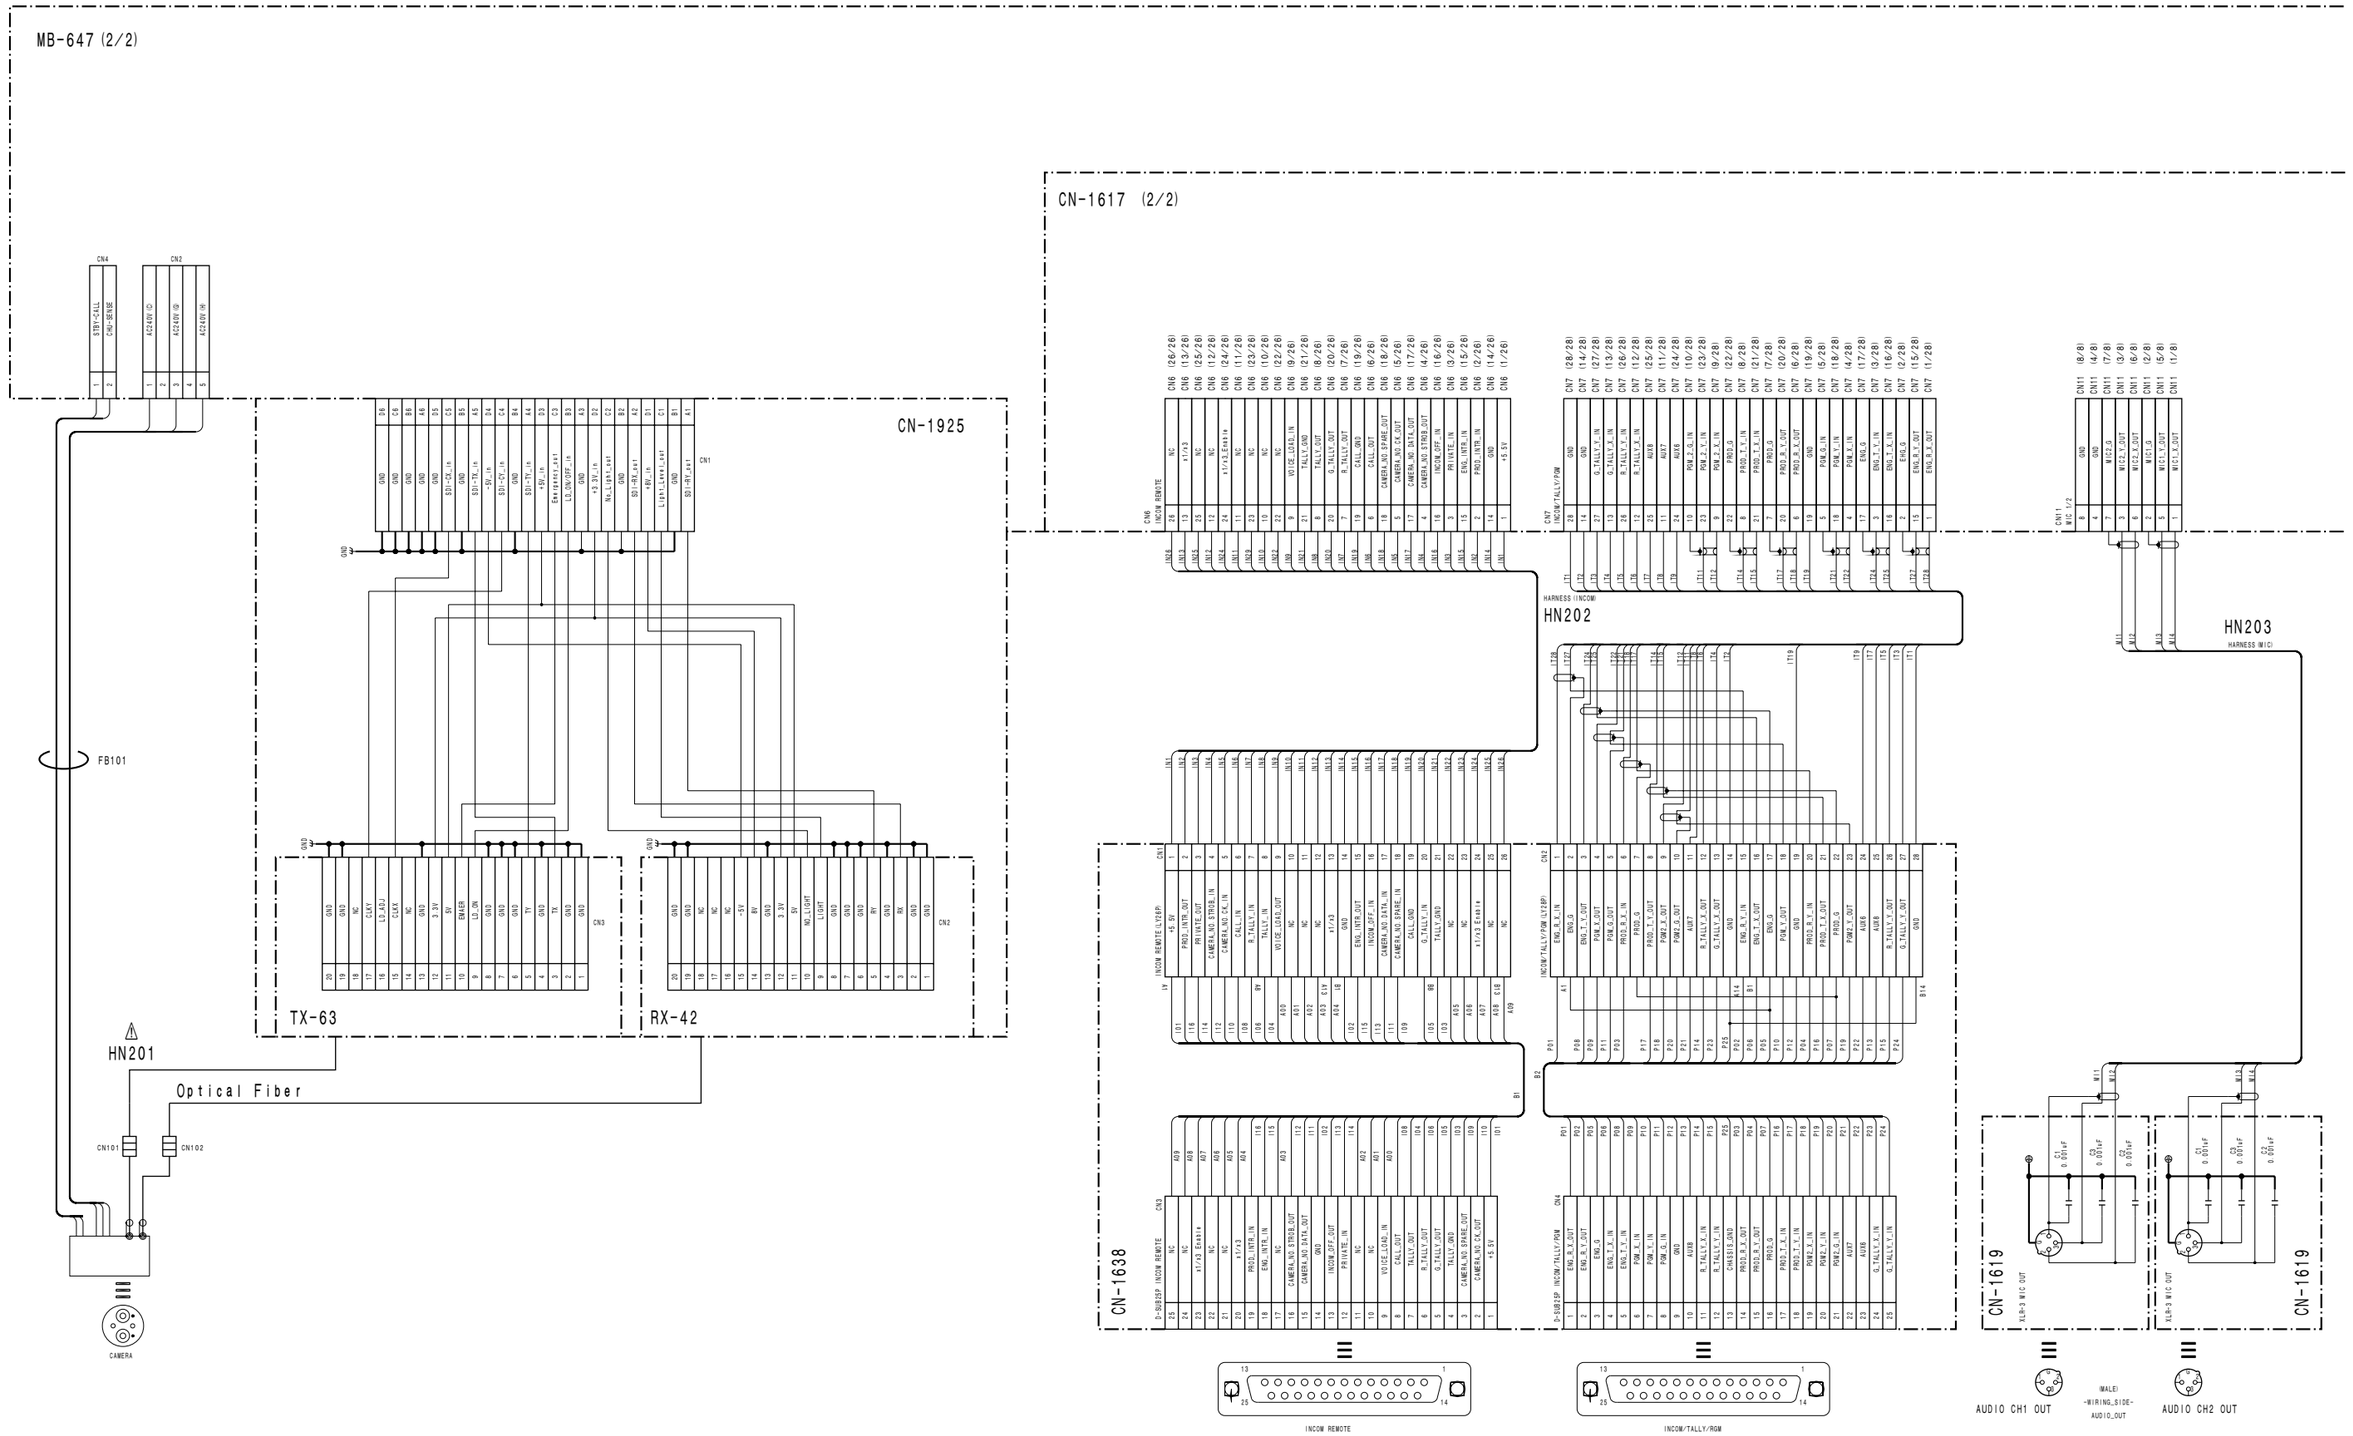

4-62

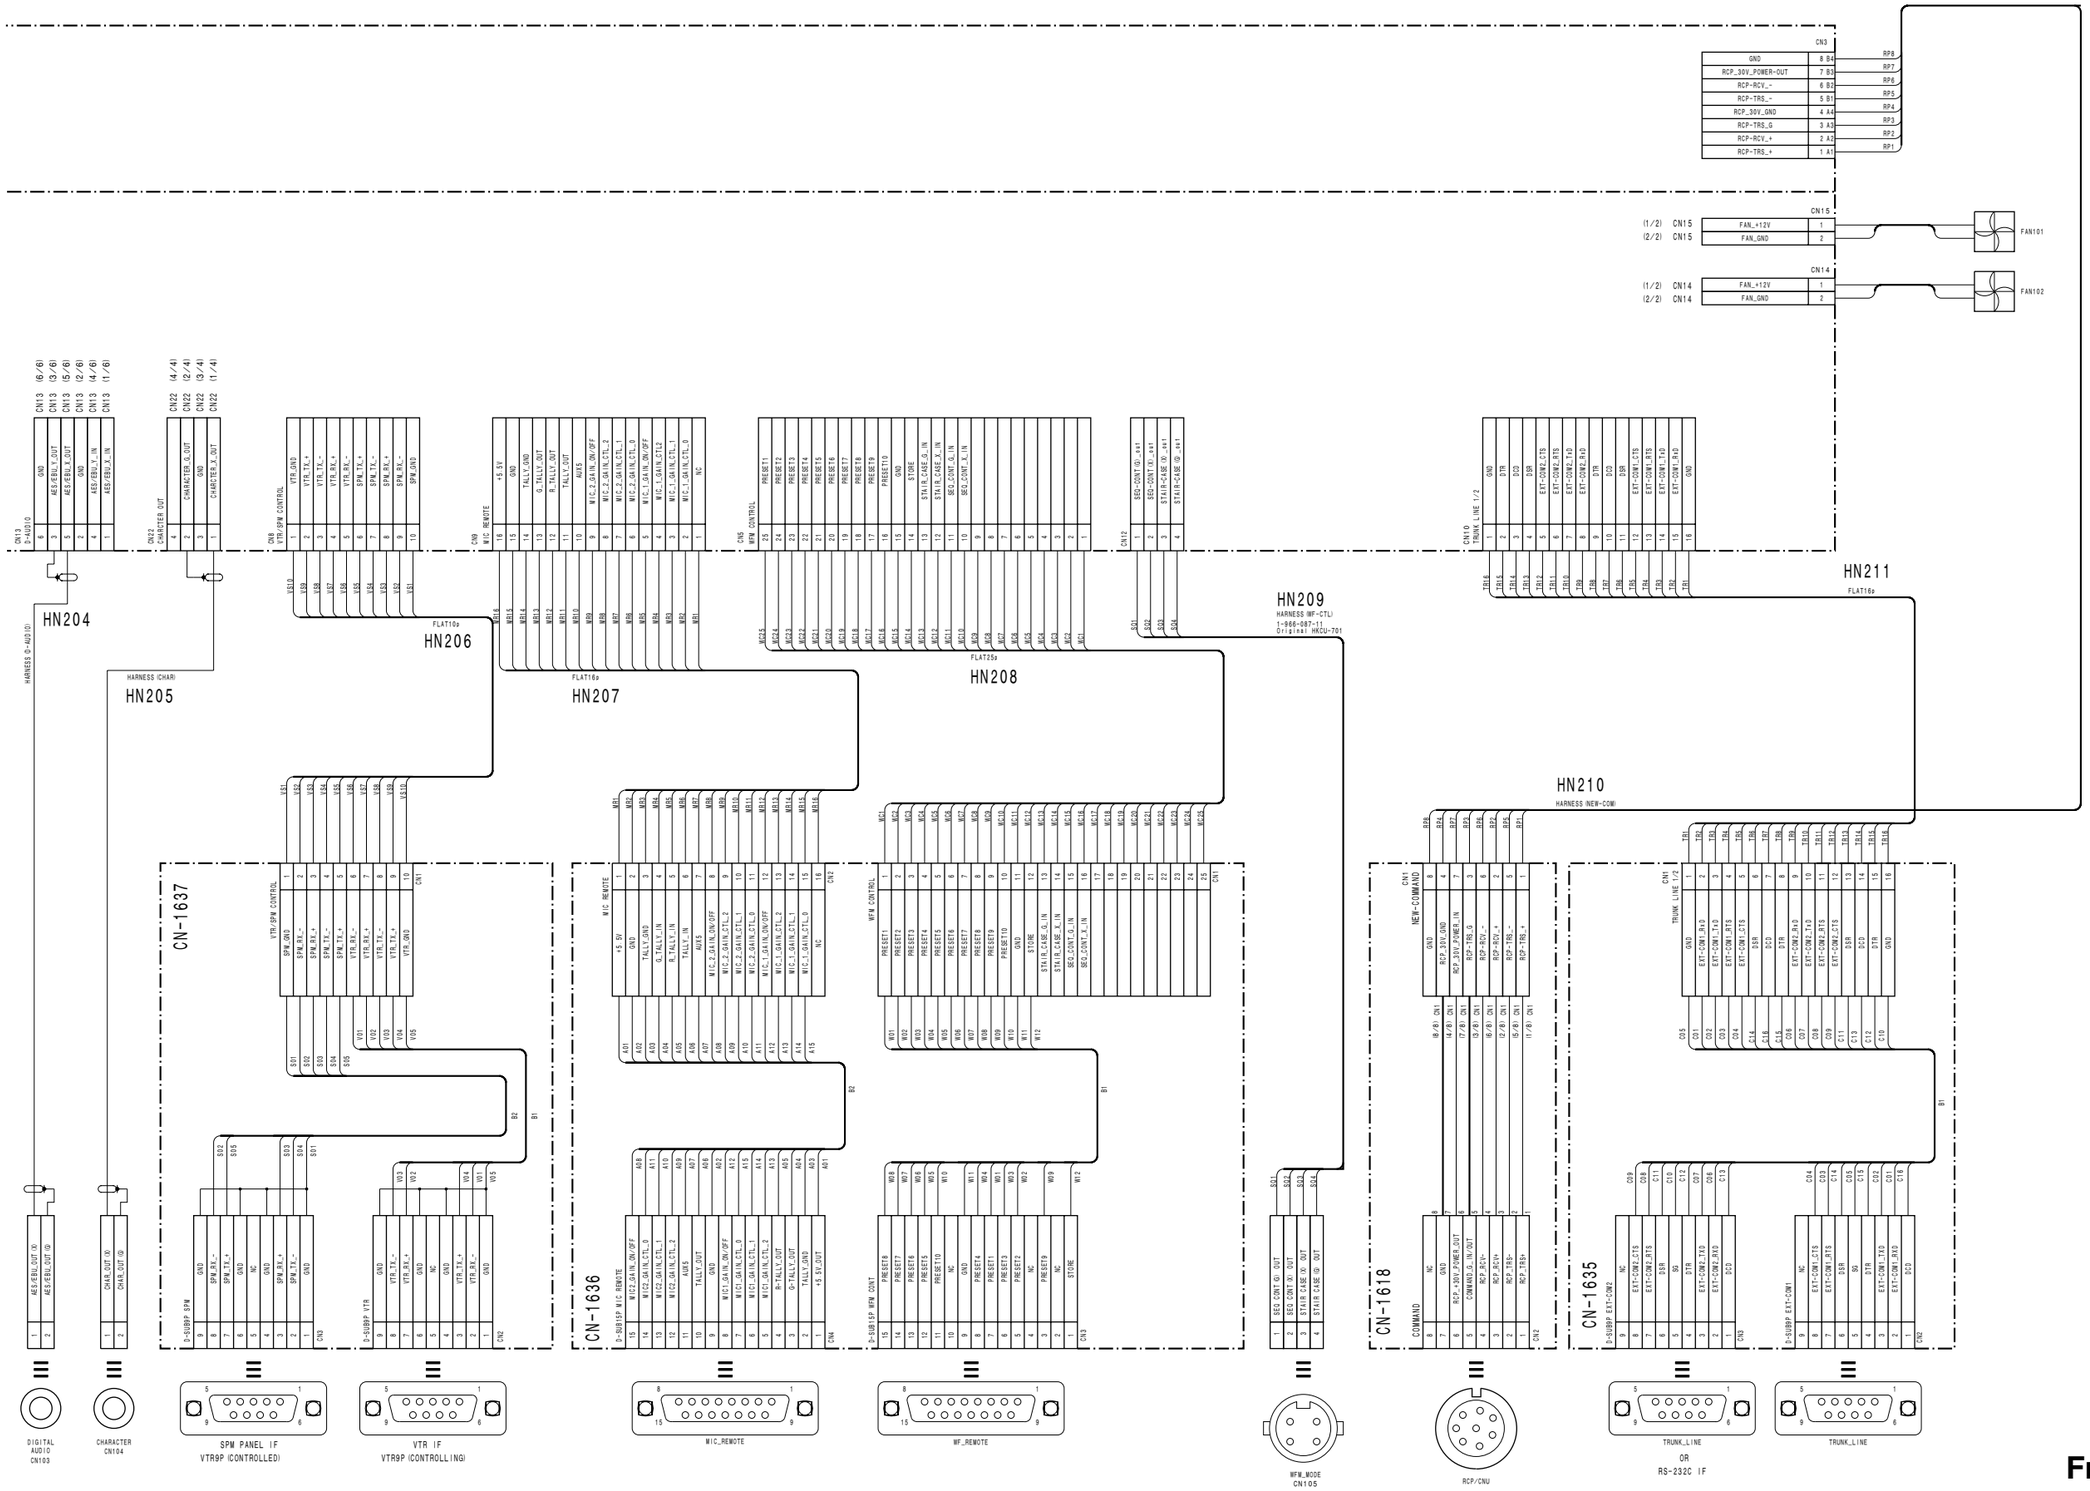

Frame Wiring (2/2)

BKP-9330 (SY) : S/N 10001 and Higher

CN1 (1/96)	A1	GND
CN1 (2/96)	B1	GND
CN1 (3/96)	C1	GND
CN1 (4/96)	D1	GND
CN1 (5/96)	A2	GND
CN1 (6/96)	B2	GND
CN1 (7/96)	C2	GND
CN1 (8/96)	D2	GND
CN1 (9/96)	A3	-5.5V
CN1 (10/96)	B3	-5.5V
CN1 (11/96)	C3	-5.5V
CN1 (12/96)	D3	-5.5V
CN1 (13/96)	A4	-5.5V
CN1 (14/96)	B4	-5.5V
CN1 (15/96)	C4	-5.5V
CN1 (16/96)	D4	-5.5V
CN1 (33/96)	A9	+3.3V
CN1 (34/96)	B9	+3.3V
CN1 (35/96)	C9	+3.3V
CN1 (36/96)	D9	+3.3V
CN1 (37/96)	A10	+3.3V
CN1 (38/96)	B10	+3.3V
CN1 (39/96)	C10	+3.3V
CN1 (40/96)	D10	+3.3V
CN1 (25/96)	A7	+5.5V
CN1 (26/96)	B7	+5.5V
CN1 (27/96)	C7	+5.5V
CN1 (28/96)	D7	+5.5V
CN1 (29/96)	A8	+5.5V
CN1 (30/96)	B8	+5.5V
CN1 (31/96)	C8	+5.5V
CN1 (32/96)	D8	+5.5V
CN1 (49/96)	A13	GND
CN1 (50/96)	B13	GND
CN1 (51/96)	C13	GND
CN1 (52/96)	D13	GND
CN1 (53/96)	A14	GND
CN1 (54/96)	B14	GND
CN1 (55/96)	C14	GND
CN1 (56/96)	D14	GND

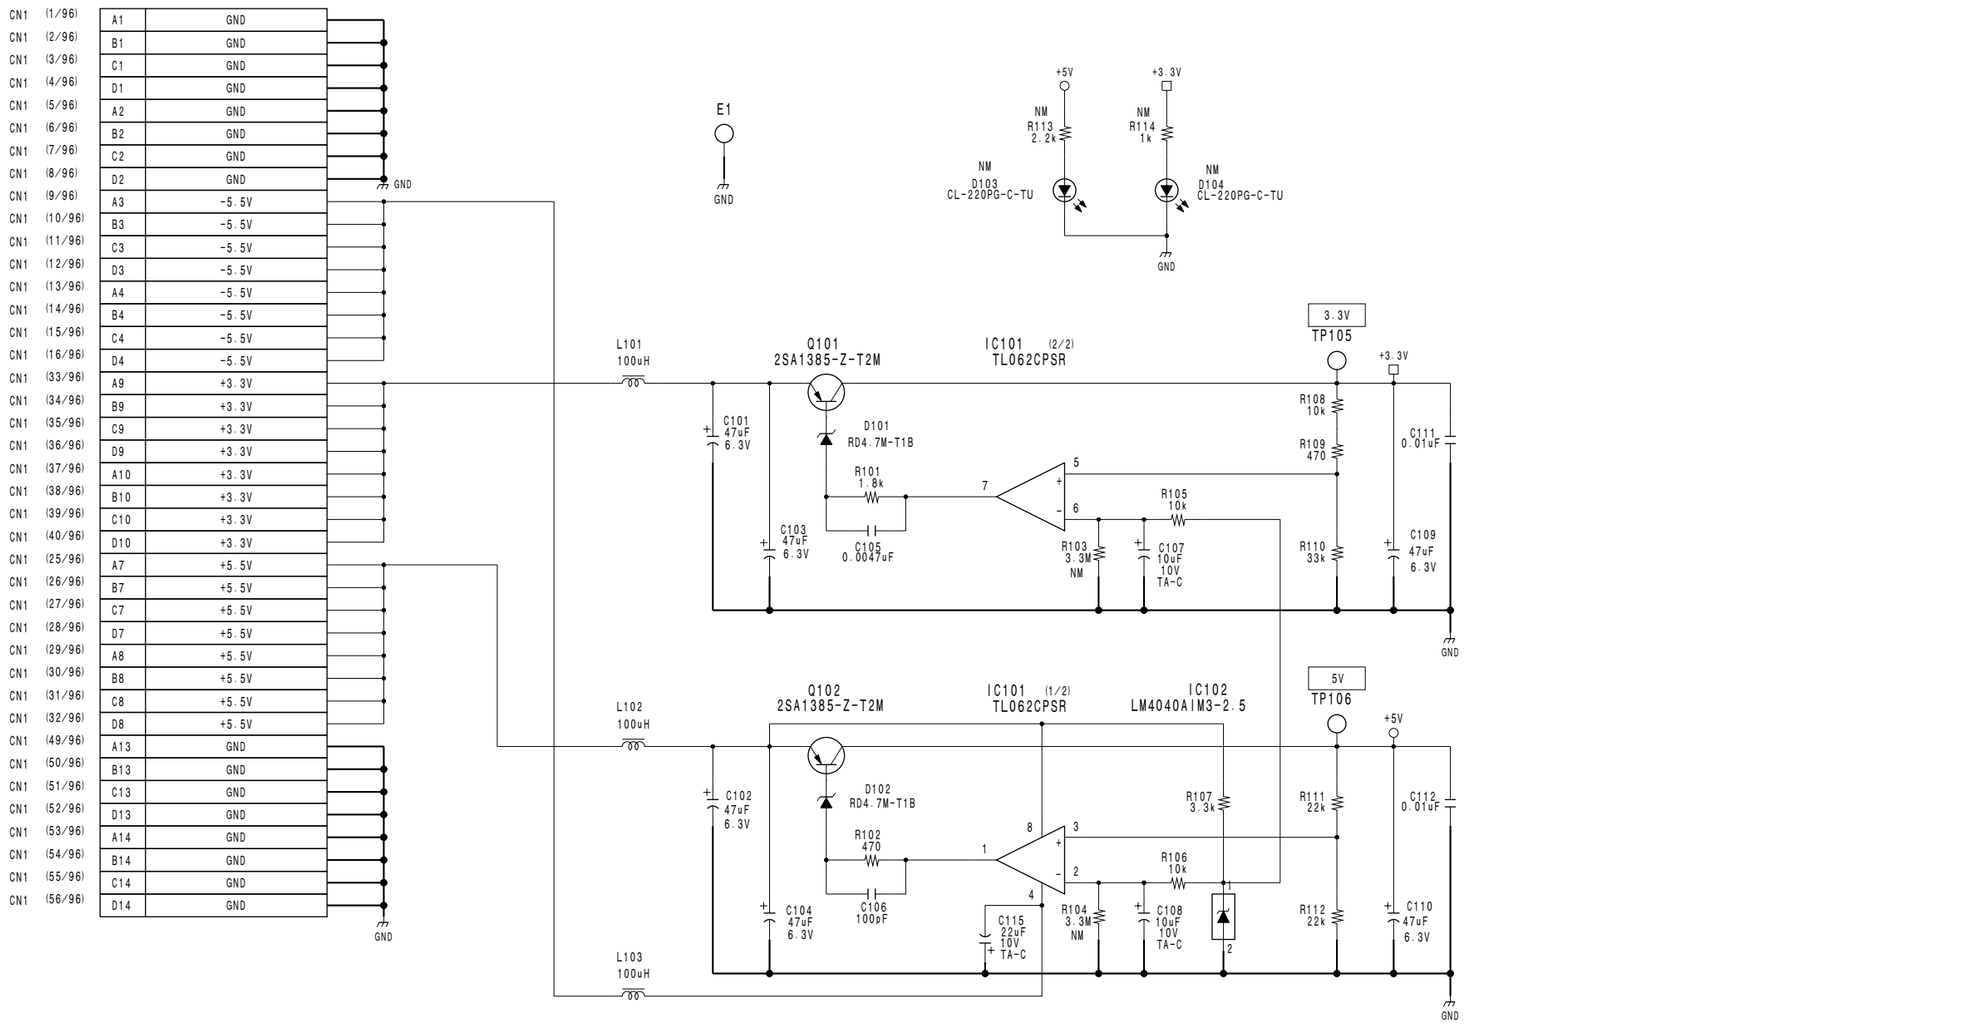

CN1 (41/96)	A11	IIC1-DT
CN1 (42/96)	B11	IIC1-CLK

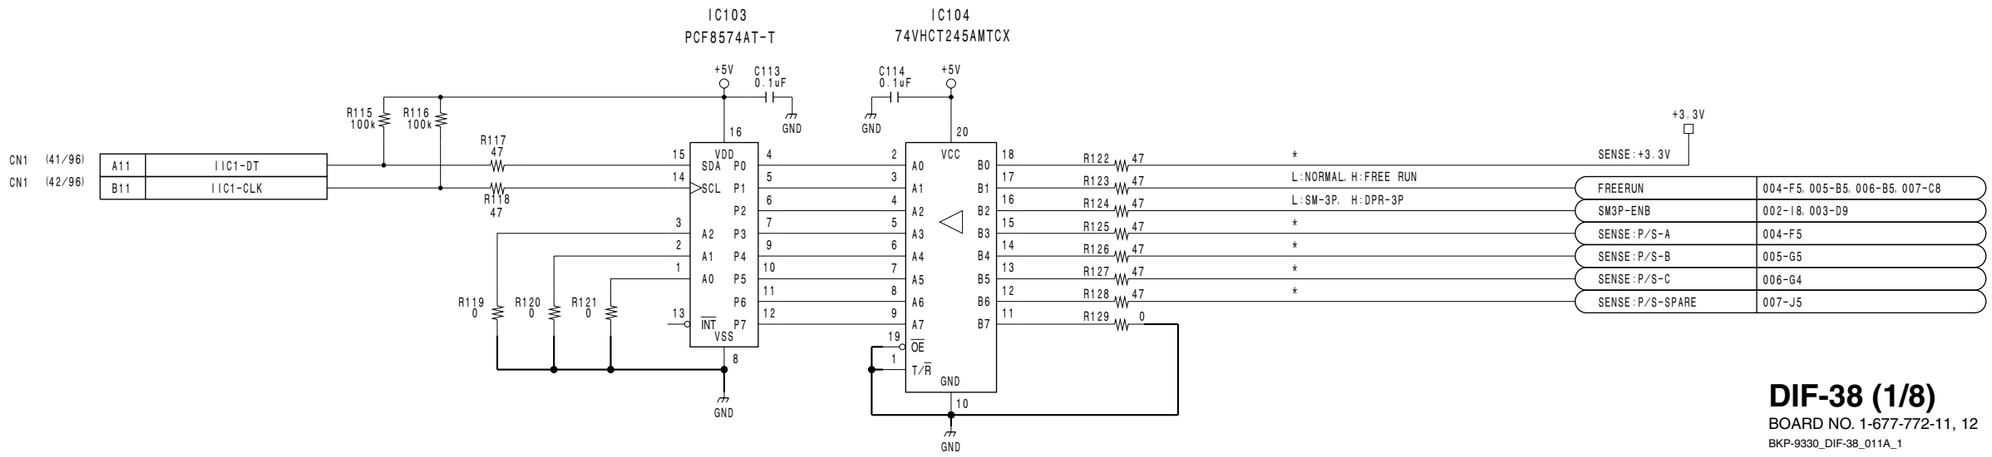

FREERUN	004-F5, 005-B5, 006-B5, 007-C8
SM3P-ENB	002-I8, 003-D9
SENSE:P/S-A	004-F5
SENSE:P/S-B	005-G5
SENSE:P/S-C	006-G4
SENSE:P/S-SPARE	007-J5

DIF-38 (1/8)
BOARD NO. 1-677-772-11, 12
BKP-9330_DIF-38_011A_1

BKP-9330 (SY) : S/N 10001 and Higher

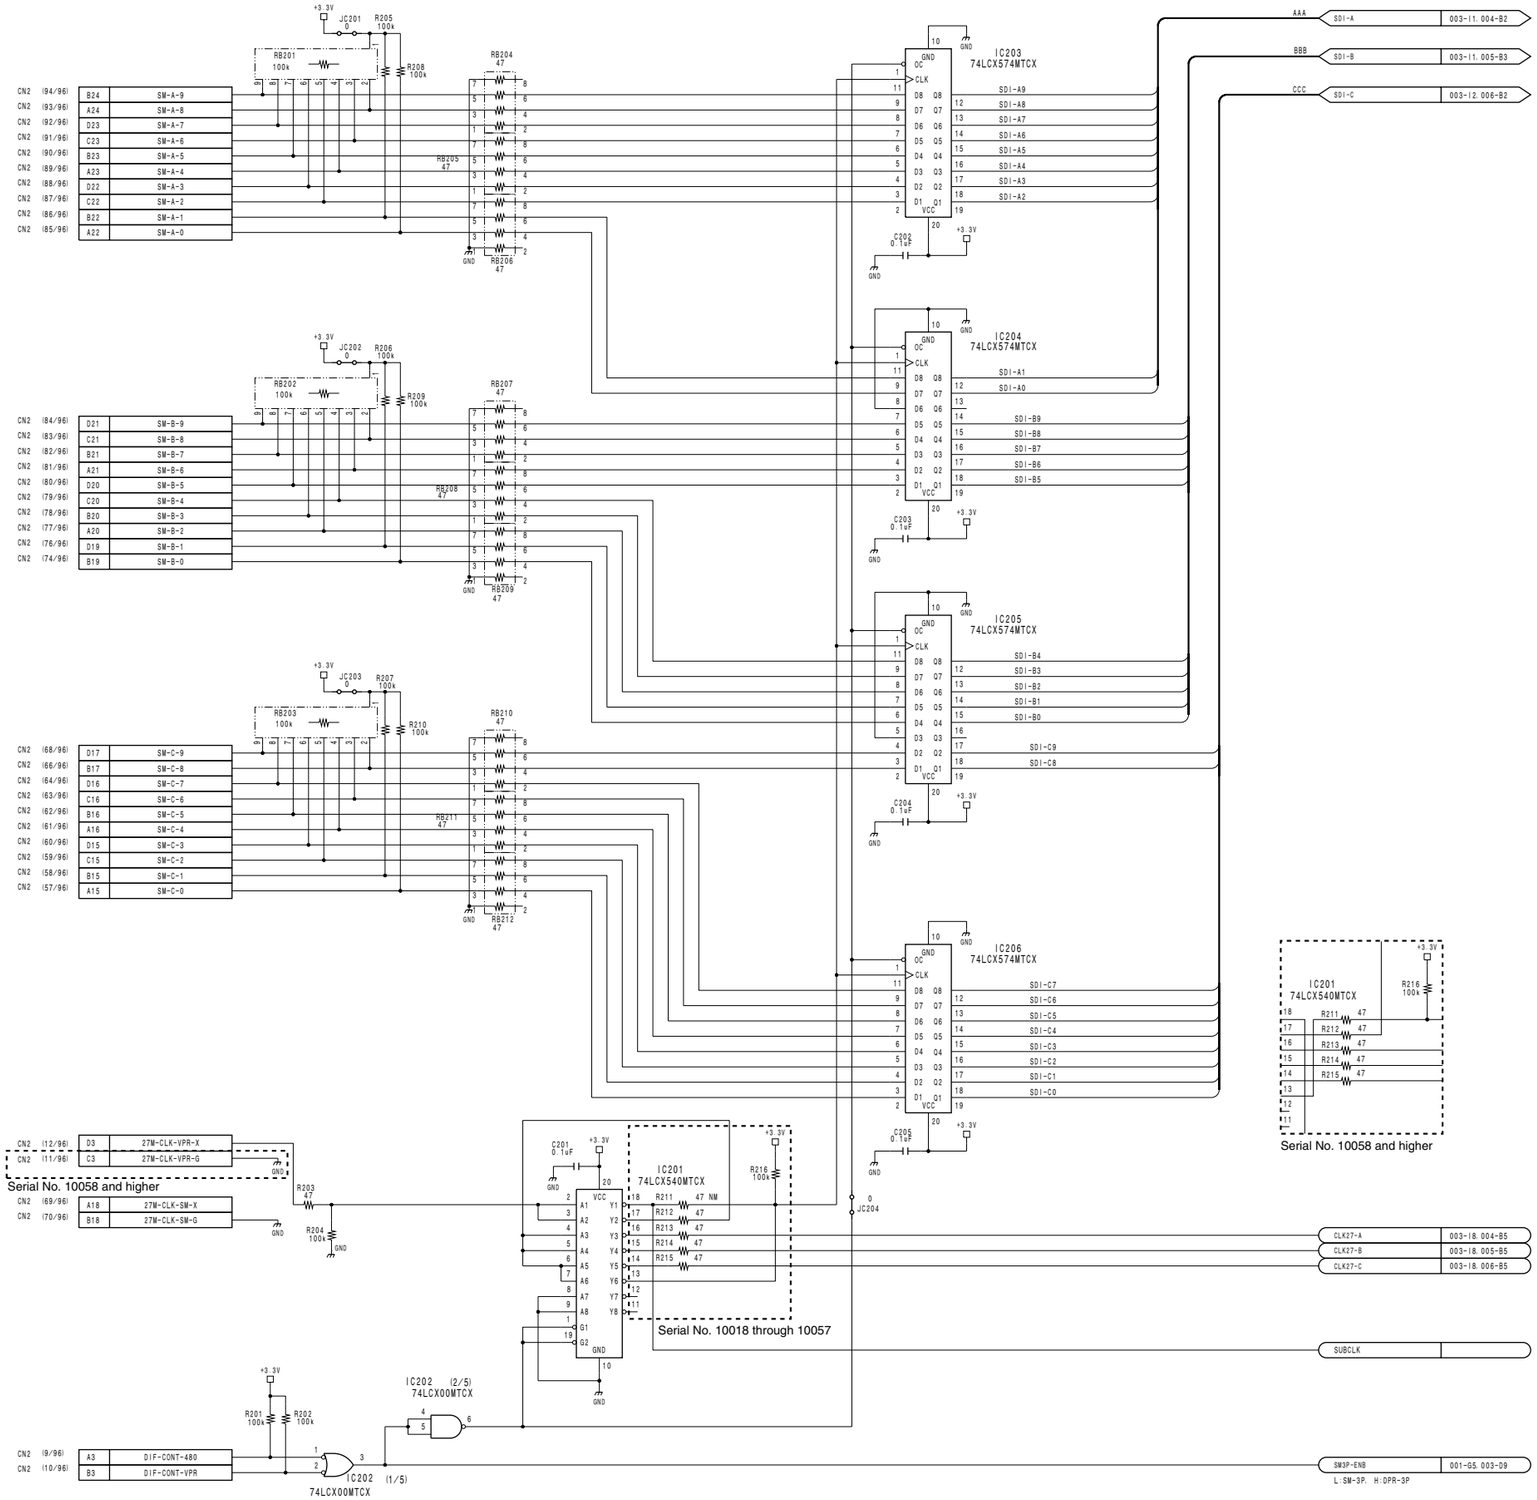

DIF-38 (2/8)
BOARD NO. 1-677-772-11, 12
BKP-9330_DIF-38_011A_2

BKP-9330 (SY) : S/N 10001 and Higher

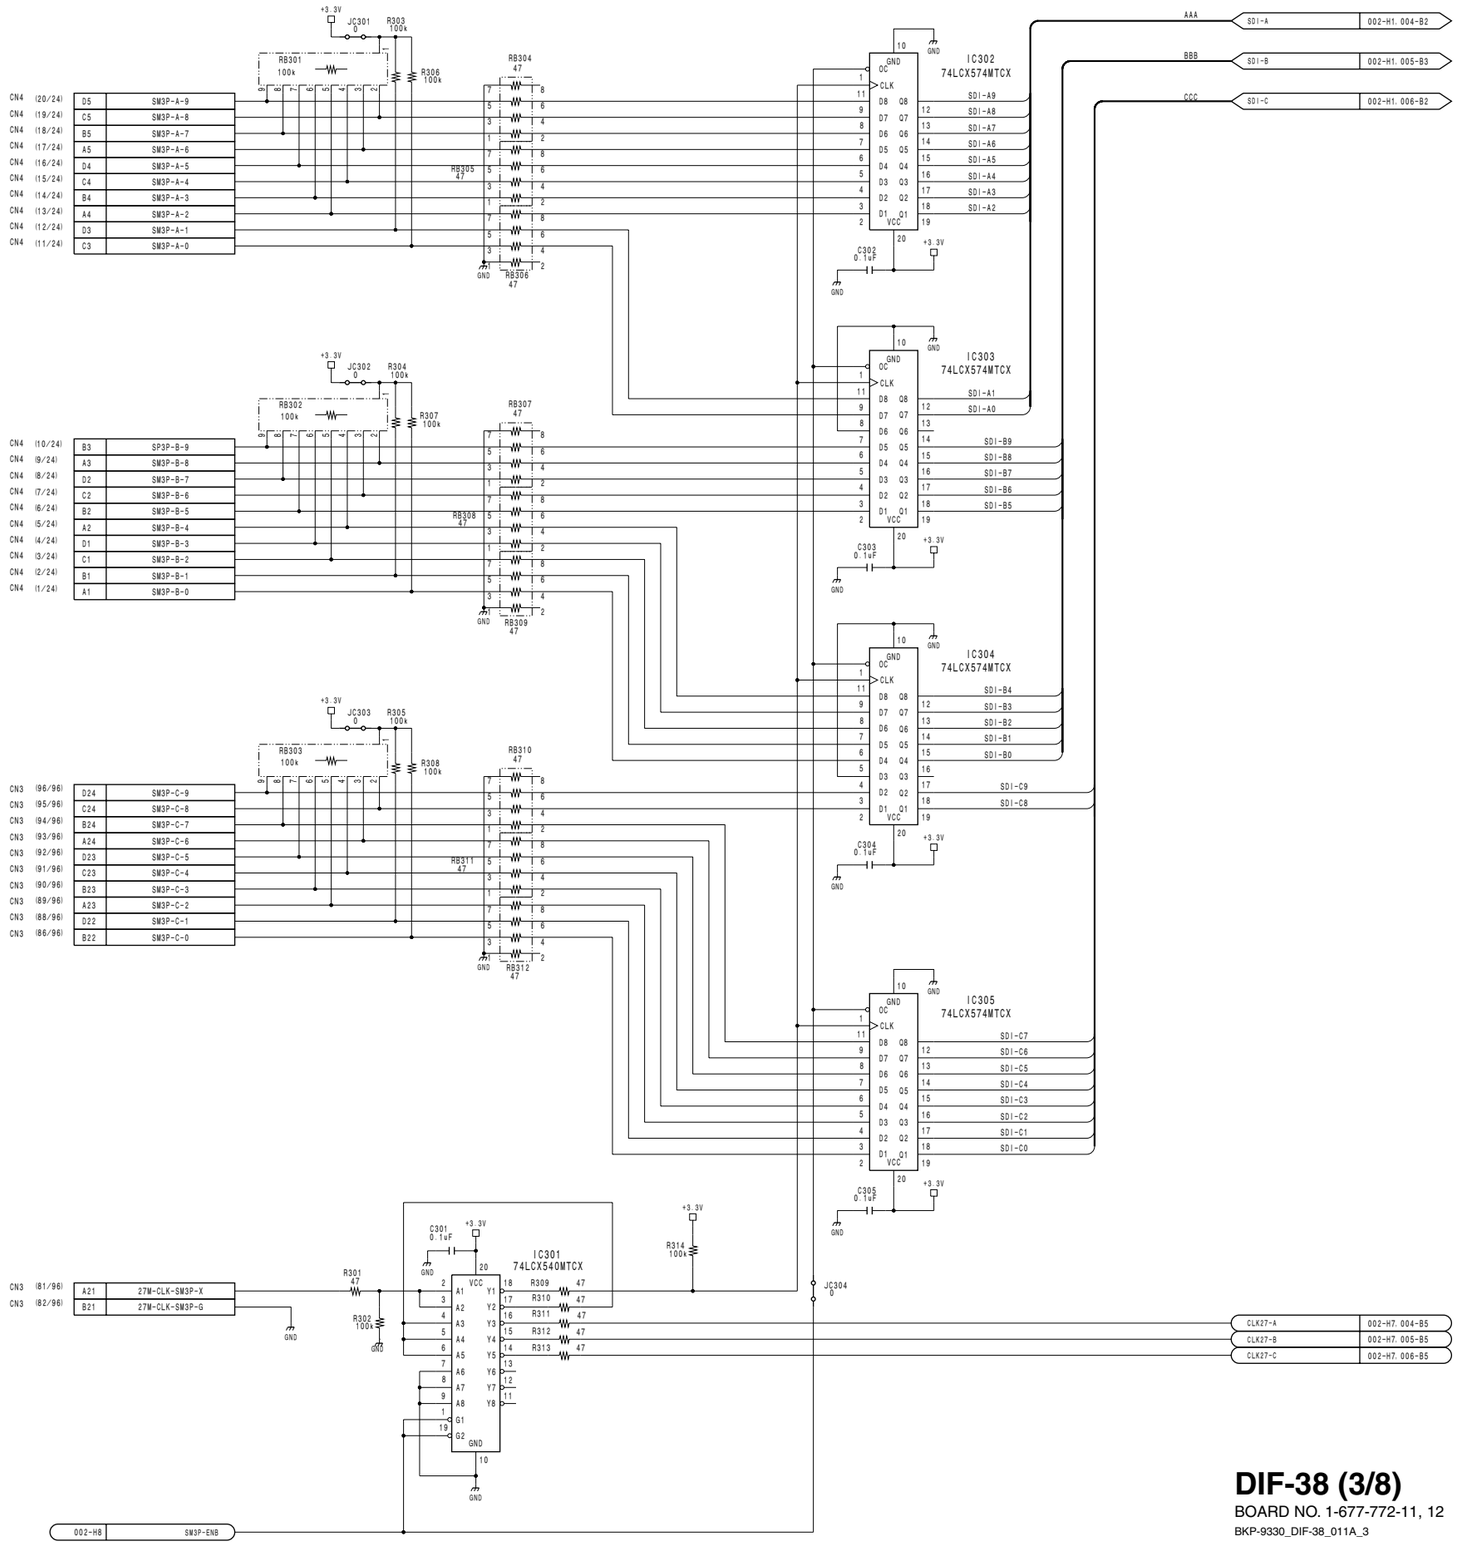

DIF-38 (3/8)

BOARD NO. 1-677-772-11, 12

BKP-9330_DIF-38_011A_3

BKP-9330 (SY) : S/N 10001 and Higher

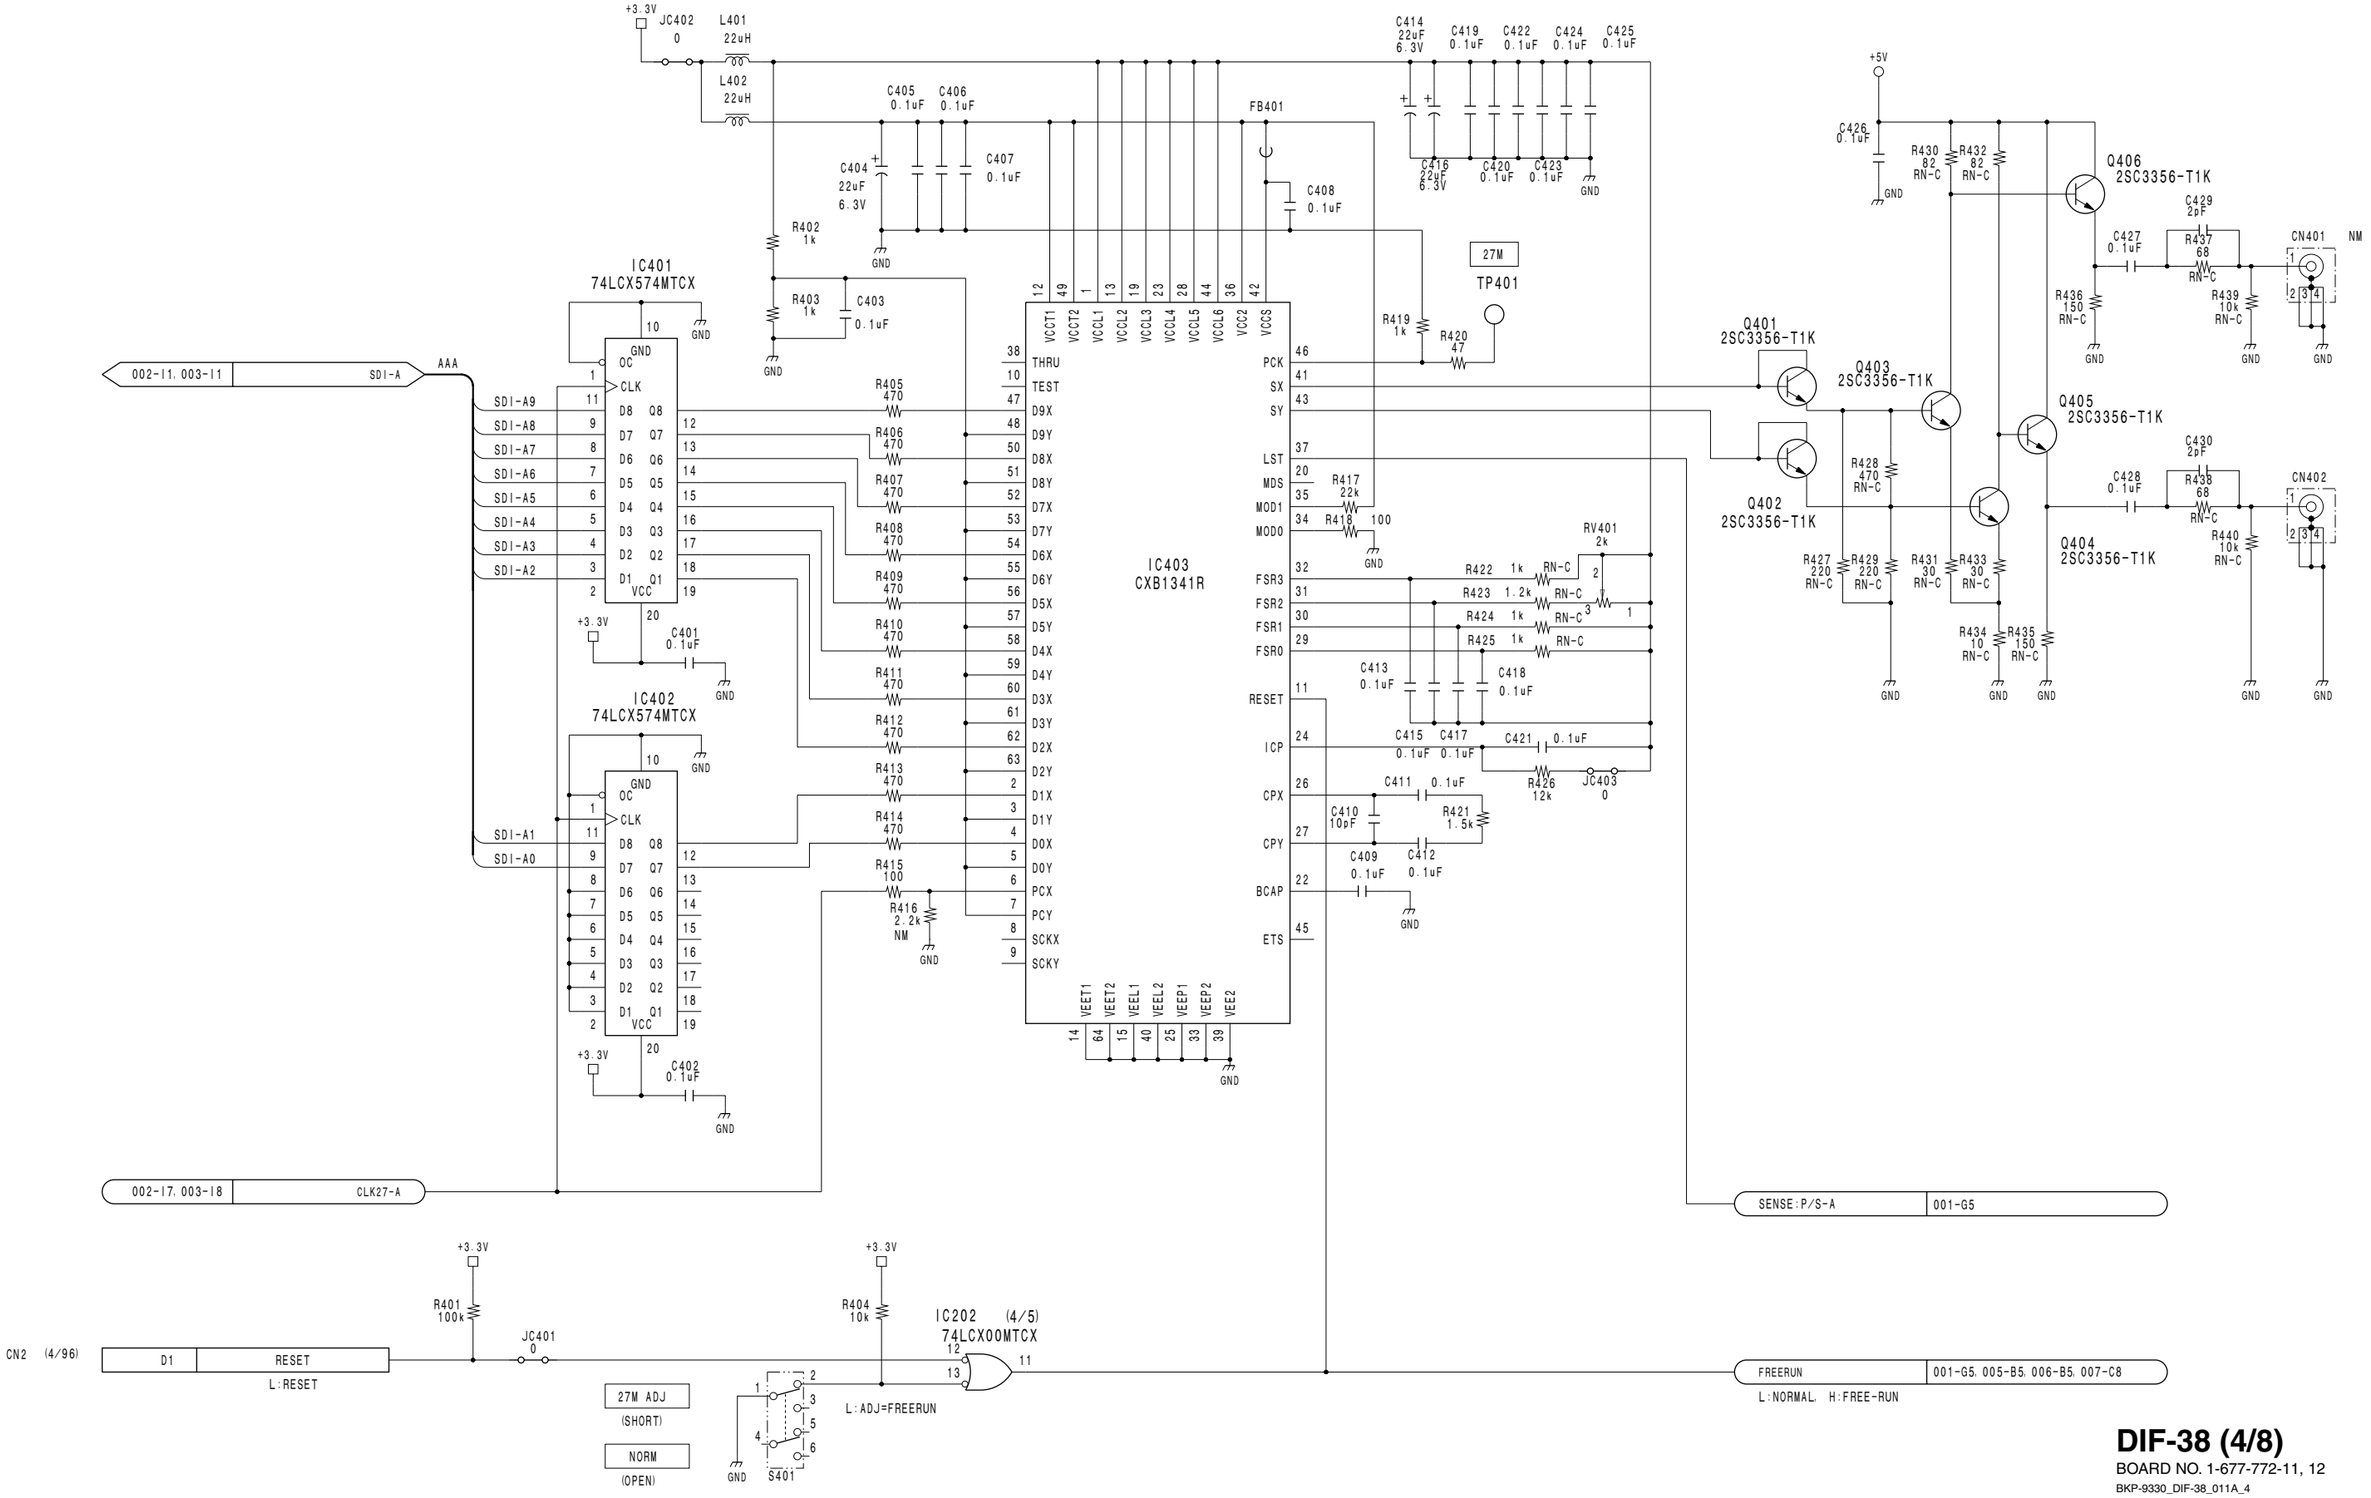

DIF-38 (4/8)

BOARD NO. 1-677-772-11, 12

BKP-9330_DIF-38_011A_4

BKP-9330 (SY) : S/N 10001 and Higher

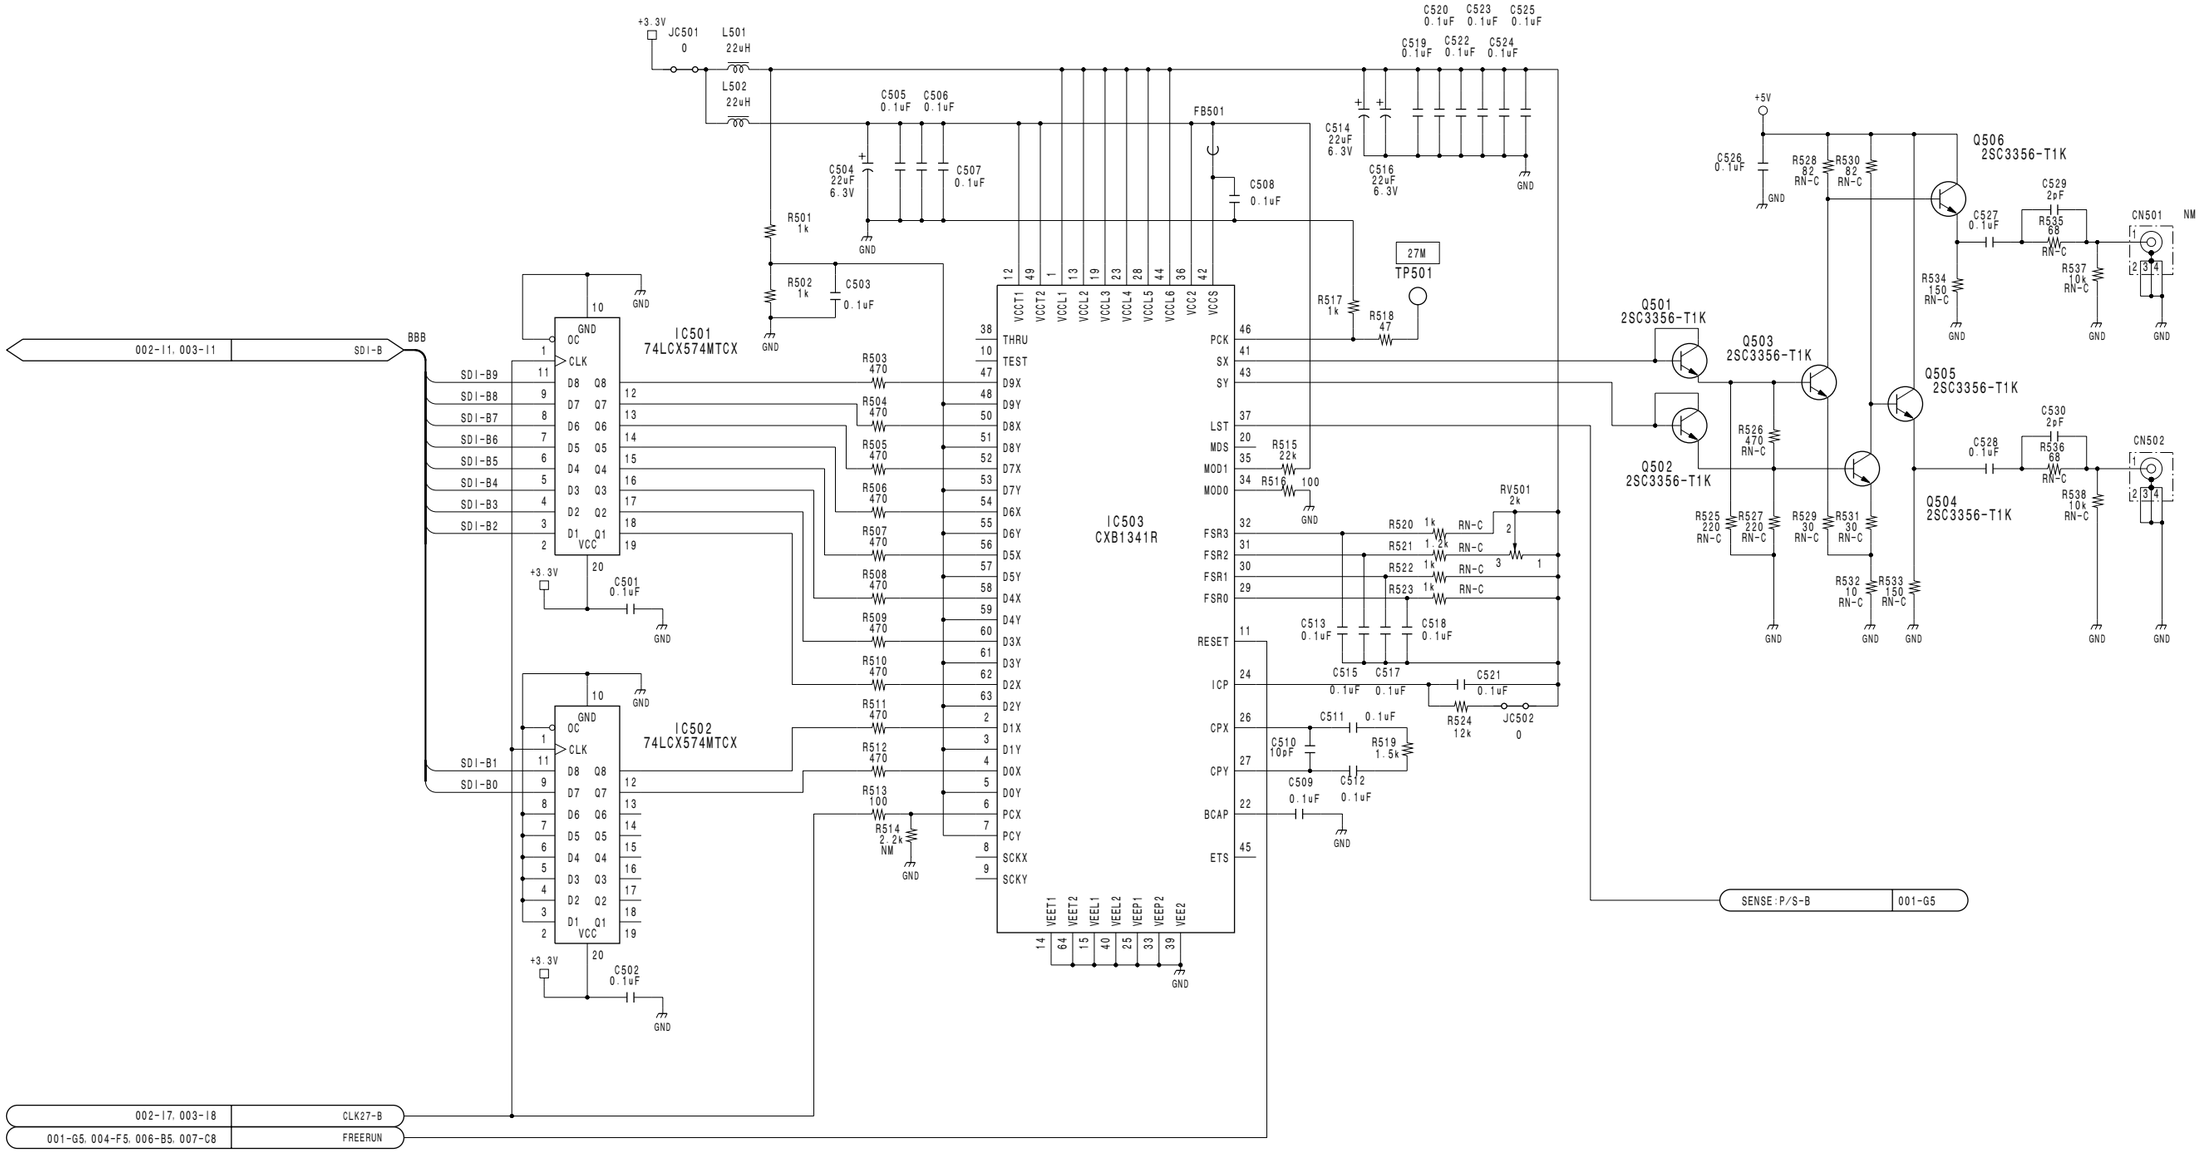

DIF-38 (5/8)

BOARD NO. 1-677-772-11, 12

BKP-9330_DIF-38_011A_5

BKP-9330 (SY) : S/N 10001 and Higher

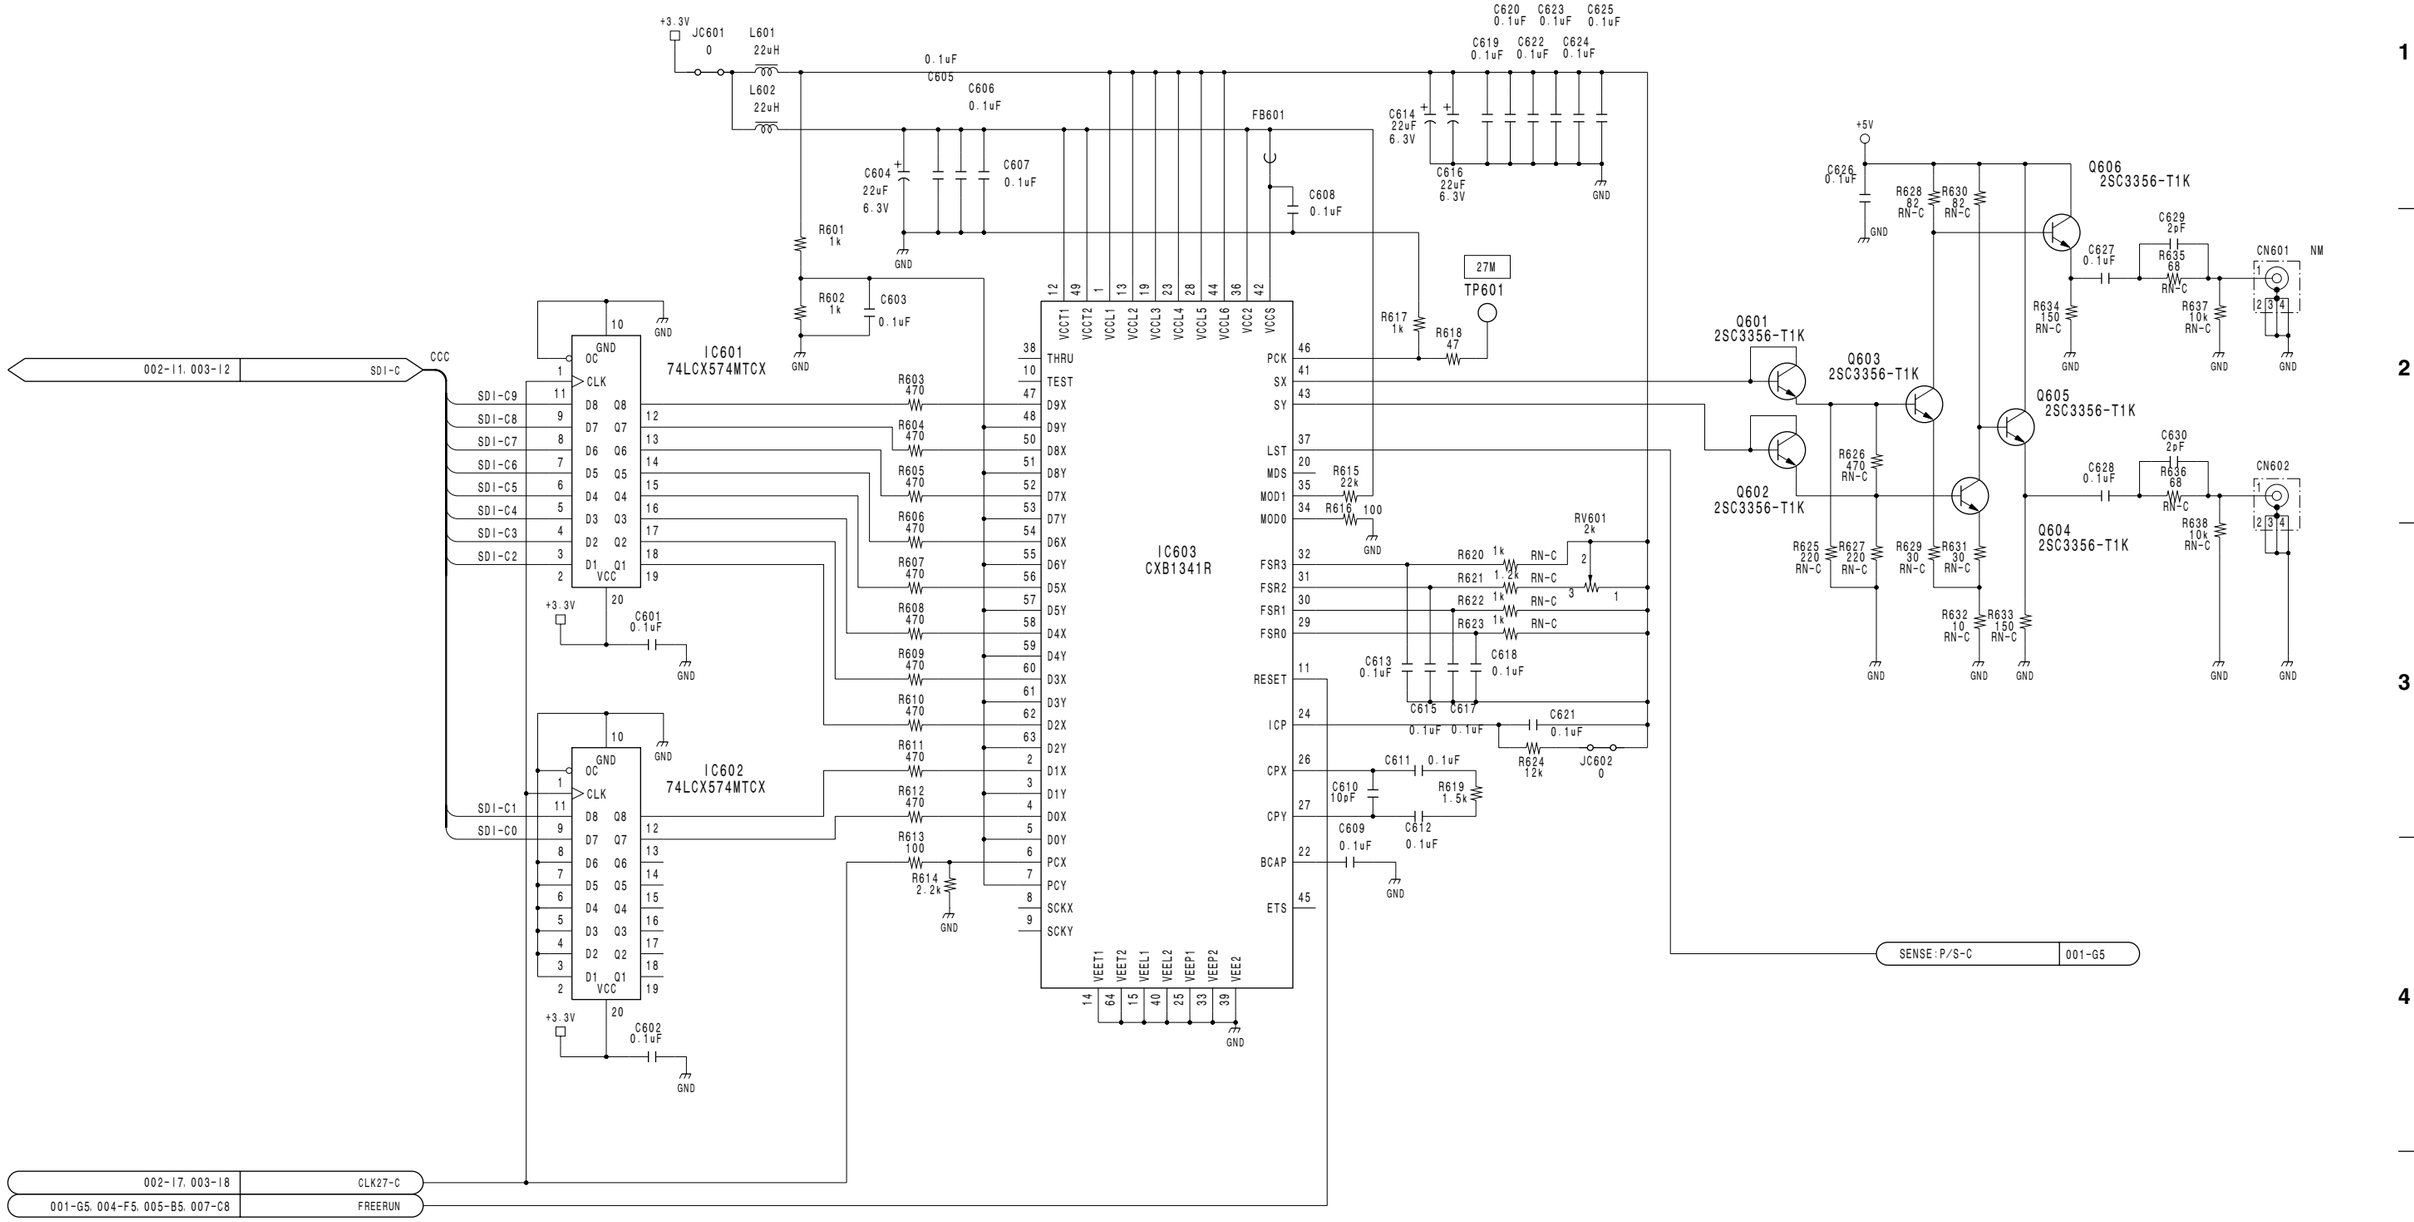

DIF-38 (6/8)
BOARD NO. 1-677-772-11, 12
BKP-9330_DIF-38_011A_6

BKP-9330 (SY) : S/N 10001 and Higher

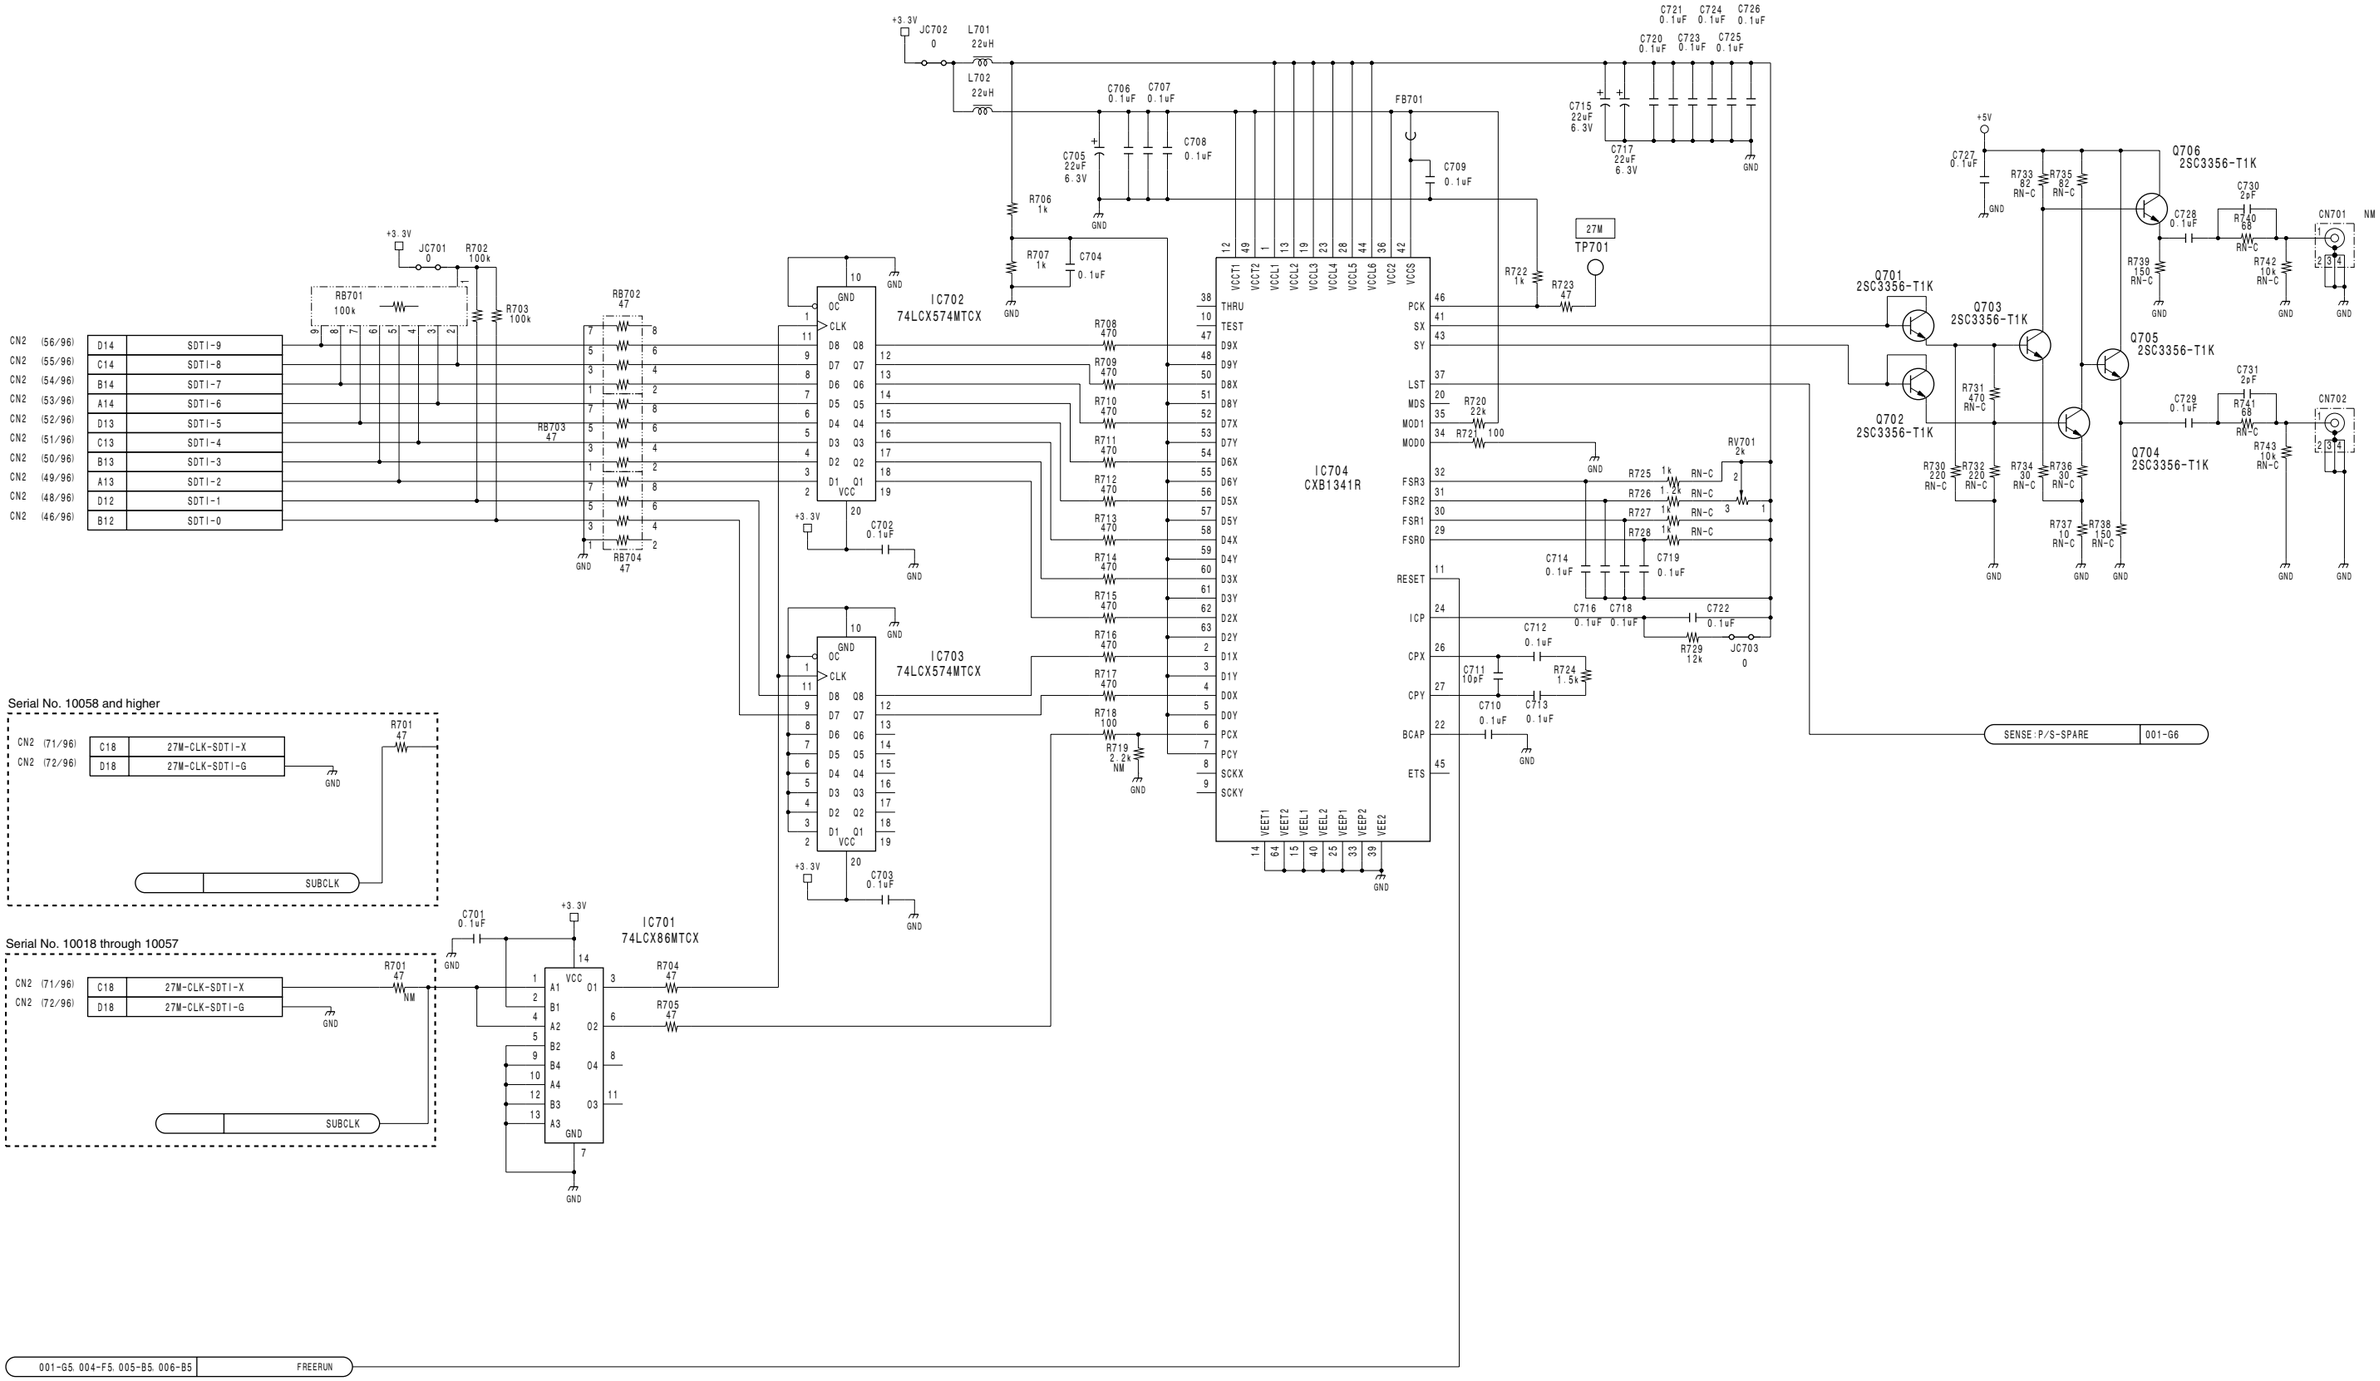

DIF-38 (7/8)

BOARD NO. 1-677-772-11, 12

BKP-9330_DIF-38_011A_7

BKP-9330 (SY) : S/N 10001 and Higher

CN1	(17/96)	A5	N.C
CN1	(18/96)	B5	N.C
CN1	(19/96)	C5	N.C
CN1	(20/96)	D5	N.C
CN1	(21/96)	A6	N.C
CN1	(22/96)	B6	N.C
CN1	(23/96)	C6	N.C
CN1	(24/96)	D6	N.C

CN1	(43/96)	C11	IIC2-DT
CN1	(44/96)	D11	IIC2-CLK
CN1	(45/96)	A12	IIC3-DT
CN1	(46/96)	B12	IIC3-CLK
CN1	(47/96)	C12	IIC4-DT
CN1	(48/96)	D12	IIC4-CLK
CN1	(57/96)	A15	N.C
CN1	(58/96)	B15	N.C
CN1	(59/96)	C15	N.C
CN1	(60/96)	D15	N.C
CN1	(61/96)	A16	(GND)
CN1	(62/96)	B16	(GND)
CN1	(63/96)	C16	(GND)
CN1	(64/96)	D16	(GND)
CN1	(65/96)	A17	HD2-Y0
CN1	(66/96)	B17	HD2-Y1
CN1	(67/96)	C17	74M-CLK-G
CN1	(68/96)	D17	74M-CLK-X
CN1	(69/96)	A18	HD2-Y2
CN1	(70/96)	B18	HD2-Y3
CN1	(71/96)	C18	HD2-Y4
CN1	(72/96)	D18	(GND)
CN1	(73/96)	A19	HD2-Y5
CN1	(74/96)	B19	HD2-Y6
CN1	(75/96)	C19	HD2-Y7
CN1	(76/96)	D19	HD2-Y8
CN1	(77/96)	A20	HD2-Y9
CN1	(78/96)	B20	HD2-C0
CN1	(79/96)	C20	HD2-C1
CN1	(80/96)	D20	HD2-C2
CN1	(81/96)	A21	HD2-C3
CN1	(82/96)	B21	HD2-C4
CN1	(83/96)	C21	HD2-C5
CN1	(84/96)	D21	HD2-C6
CN1	(85/96)	A22	HD2-C7
CN1	(86/96)	B22	HD2-C8
CN1	(87/96)	C22	HD2-C9
CN1	(88/96)	D22	(GND)
CN1	(89/96)	A23	GATE1
CN1	(90/96)	B23	GATE2
CN1	(91/96)	C23	GATE3
CN1	(92/96)	D23	(---)
CN1	(93/96)	A24	GATE1
CN1	(94/96)	B24	GATE2
CN1	(95/96)	C24	GATE3
CN1	(96/96)	D24	(---)

CN2	(1/96)	A1	SYSTEM-V
CN2	(2/96)	B1	V-RESET
CN2	(3/96)	C1	NTSC/PAL
CN2	(5/96)	A2	SYSTEM-H
CN2	(6/96)	B2	GND
CN2	(7/96)	C2	SYSTEM-F
CN2	(8/96)	D2	GND
CN2	(11/96)	C3	27M-CLK-VPR-G

Serial No. 10018 through 10057

CN2	(13/96)	A4	(27M-CLK-480-X)
CN2	(14/96)	B4	(27M-CLK-480-G)
CN2	(15/96)	C4	13.5M-CLK-X
CN2	(16/96)	D4	13.5M-CLK-G
CN2	(17/96)	A5	GND
CN2	(18/96)	B5	HD1-Y0
CN2	(19/96)	C5	GND
CN2	(20/96)	D5	HD1-Y1
CN2	(21/96)	A6	HD1-Y2
CN2	(22/96)	B6	HD1-Y3
CN2	(23/96)	C6	HD1-Y4
CN2	(24/96)	D6	HD1-Y5
CN2	(25/96)	A7	HD1-Y6
CN2	(26/96)	B7	HD1-Y7
CN2	(27/96)	C7	HD1-Y8
CN2	(28/96)	D7	HD1-Y9
CN2	(29/96)	A8	HD1-C0
CN2	(30/96)	B8	HD1-C1
CN2	(31/96)	C8	HD1-C2
CN2	(32/96)	D8	HD1-C3
CN2	(33/96)	A9	HD1-C4
CN2	(34/96)	B9	HD1-C5
CN2	(35/96)	C9	HD1-C6
CN2	(36/96)	D9	HD1-C7
CN2	(37/96)	A10	GND
CN2	(38/96)	B10	HD1-C8
CN2	(39/96)	C10	GND
CN2	(40/96)	D10	HD1-C9
CN2	(41/96)	A11	27M-CLK-MEM-X
CN2	(42/96)	B11	27M-CLK-MEM-G
CN2	(43/96)	C11	74M-CLK-HD1-X
CN2	(44/96)	D11	74M-CLK-HD1-G
CN2	(45/96)	A12	GND
CN2	(47/96)	C12	GND
CN2	(65/96)	A17	GND
CN2	(67/96)	C17	GND
CN2	(73/96)	A19	GND
CN2	(75/96)	C19	GND
CN2	(95/96)	C24	GND
CN2	(96/96)	D24	GND

GND

CN3	(1/96)	A1	GND
CN3	(2/96)	B1	GND
CN3	(3/96)	C1	STROBE
CN3	(4/96)	D1	(CPU-spare)
CN3	(5/96)	A2	EXT-D7
CN3	(6/96)	B2	EXT-D6
CN3	(7/96)	C2	EXT-D5
CN3	(8/96)	D2	EXT-D4
CN3	(9/96)	A3	EXT-D3
CN3	(10/96)	B3	EXT-D2
CN3	(11/96)	C3	EXT-D1
CN3	(12/96)	D3	EXT-D0
CN3	(13/96)	A4	EXT-AD7
CN3	(14/96)	B4	EXT-AD6
CN3	(15/96)	C4	EXT-AD5
CN3	(16/96)	D4	EXT-AD4
CN3	(17/96)	A5	EXT-AD3
CN3	(18/96)	B5	EXT-AD2
CN3	(19/96)	C5	EXT-AD1
CN3	(20/96)	D5	EXT-AD0
CN3	(21/96)	A6	CS-SLOT1-A
CN3	(22/96)	B6	CS-SLOT1-B
CN3	(23/96)	C6	CS-SLOT2-A
CN3	(24/96)	D6	CS-SLOT2-B
CN3	(25/96)	A7	CS-SLOT3-A
CN3	(26/96)	B7	CS-SLOT3-B
CN3	(27/96)	C7	EXT-WR
CN3	(28/96)	D7	EXT-RD
CN3	(29/96)	A8	GND
CN3	(30/96)	B8	EXT-RST
CN3	(31/96)	C8	GND
CN3	(32/96)	D8	EXT-W/R
CN3	(33/96)	A9	27M-CLK-RETAB-X
CN3	(34/96)	B9	27M-CLK-RETAB-G
CN3	(35/96)	C9	RET-SEL0
CN3	(36/96)	D9	RET-SEL1
CN3	(37/96)	A10	GND
CN3	(38/96)	B10	RETB-0
CN3	(39/96)	C10	GND
CN3	(40/96)	D10	RETB-1
CN3	(41/96)	A11	RETB-2
CN3	(42/96)	B11	RETB-3
CN3	(43/96)	C11	RETB-4
CN3	(44/96)	D11	RETB-5
CN3	(45/96)	A12	RETB-6
CN3	(46/96)	B12	RETB-7
CN3	(47/96)	C12	RETB-8
CN3	(48/96)	D12	RETB-9

GND

CN3	(49/96)	A13	RETA-0
CN3	(50/96)	B13	RETA-1
CN3	(51/96)	C13	RETA-2
CN3	(52/96)	D13	RETA-3
CN3	(53/96)	A14	RETA-4
CN3	(54/96)	B14	RETA-5
CN3	(55/96)	C14	RETA-6
CN3	(56/96)	D14	RETA-7
CN3	(57/96)	A15	GND
CN3	(58/96)	B15	RETA-8
CN3	(59/96)	C15	GND
CN3	(60/96)	D15	RETA-9
CN3	(61/96)	A16	(spare5)
CN3	(62/96)	B16	(spare6)
CN3	(63/96)	C16	27M-CLK-RET1-SEL-X
CN3	(64/96)	D16	27M-CLK-RET1-SEL-G
CN3	(65/96)	A17	GND
CN3	(66/96)	B17	RET1-0
CN3	(67/96)	C17	GND
CN3	(68/96)	D17	RET1-1
CN3	(69/96)	A18	RET1-2
CN3	(70/96)	B18	RET1-3
CN3	(71/96)	C18	RET1-4
CN3	(72/96)	D18	RET1-5
CN3	(73/96)	A19	RET1-6
CN3	(74/96)	B19	RET1-7
CN3	(75/96)	C19	RET1-8
CN3	(76/96)	D19	RET1-9
CN3	(77/96)	A20	GND
CN3	(78/96)	B20	(SPARE7)
CN3	(79/96)	C20	GND
CN3	(80/96)	D20	SM3P-V (CoPro)
CN3	(83/96)	C21	SM3P-F (CoPro)
CN3	(84/96)	D21	SM3P-H (CoPro)
CN3	(85/96)	A22	GND
CN3	(87/96)	C22	GND

GND

CN4	(21/24)	A6	GND
CN4	(22/24)	B6	GND
CN4	(23/24)	C6	GND
CN4	(24/24)	D6	GND

GND

*BNC x4

*Cable x4

DIF-38 (8/8)

BOARD NO. 1-677-772-11, 12

BKP-9330_DIF-38_011A_8

BKP-9330 (SY) : S/N 10001 and Higher

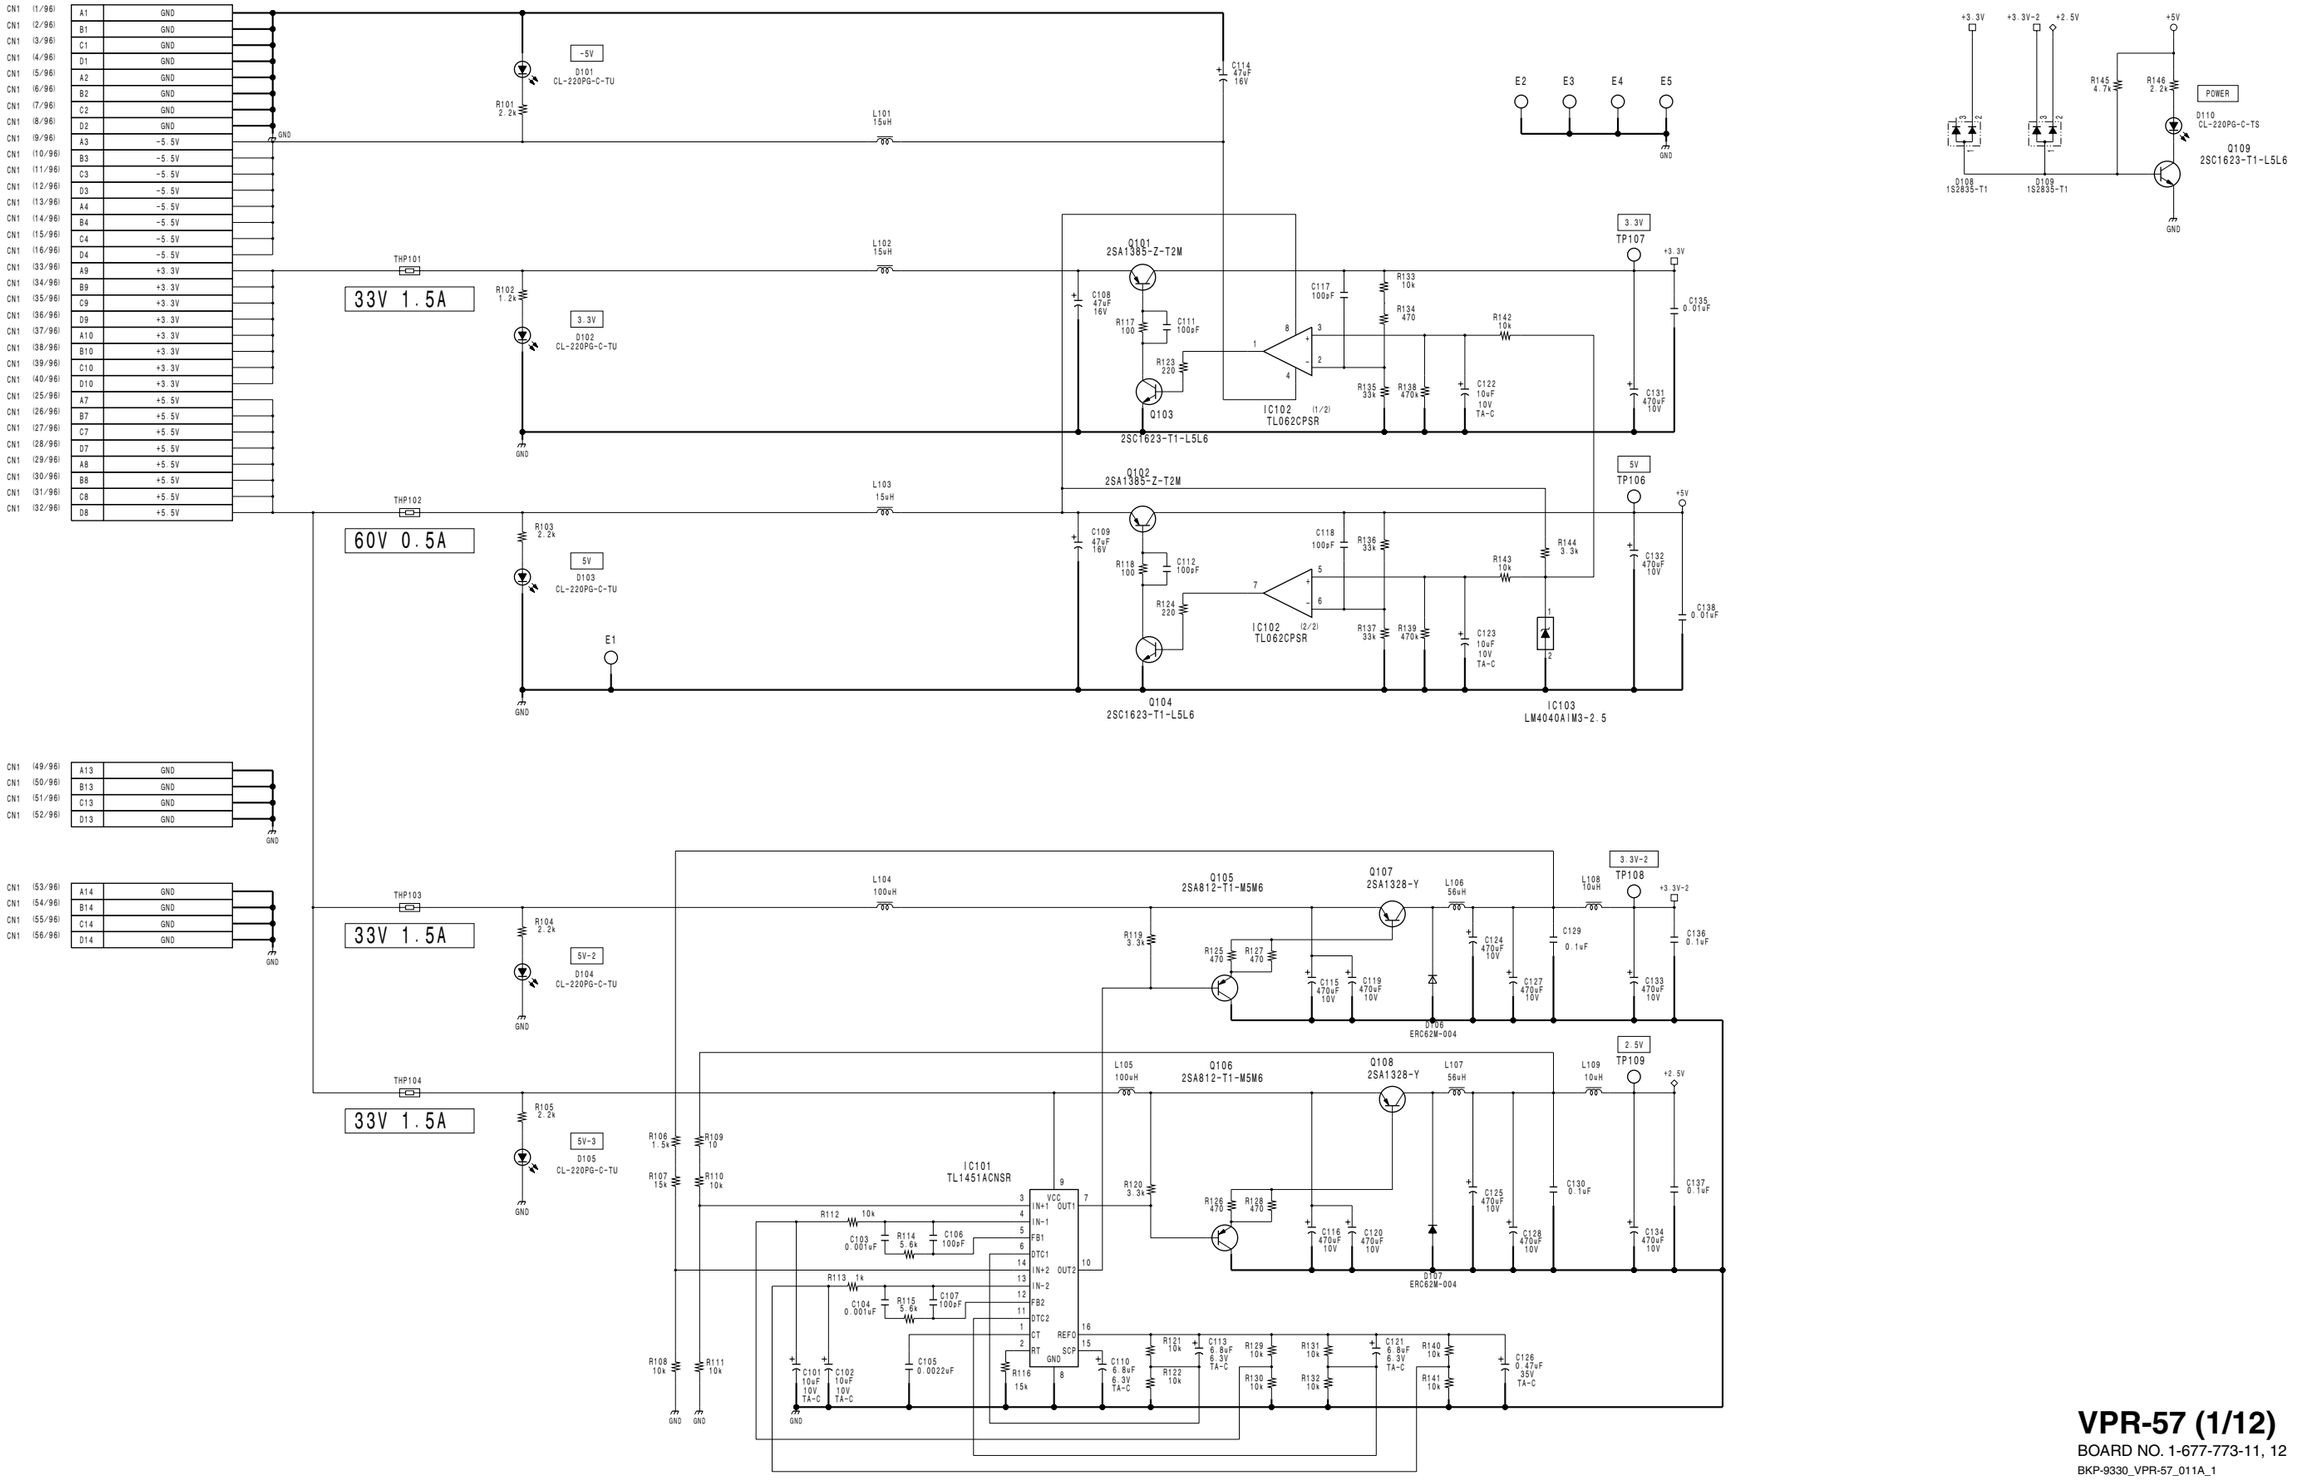

VPR-57 (1/12)
BOARD NO. 1-677-773-11, 12
BKP-9330_VPR-57_011A_1

CCU-900/900P MMV2

BKP-9330 (SY) : S/N 10001 and Higher

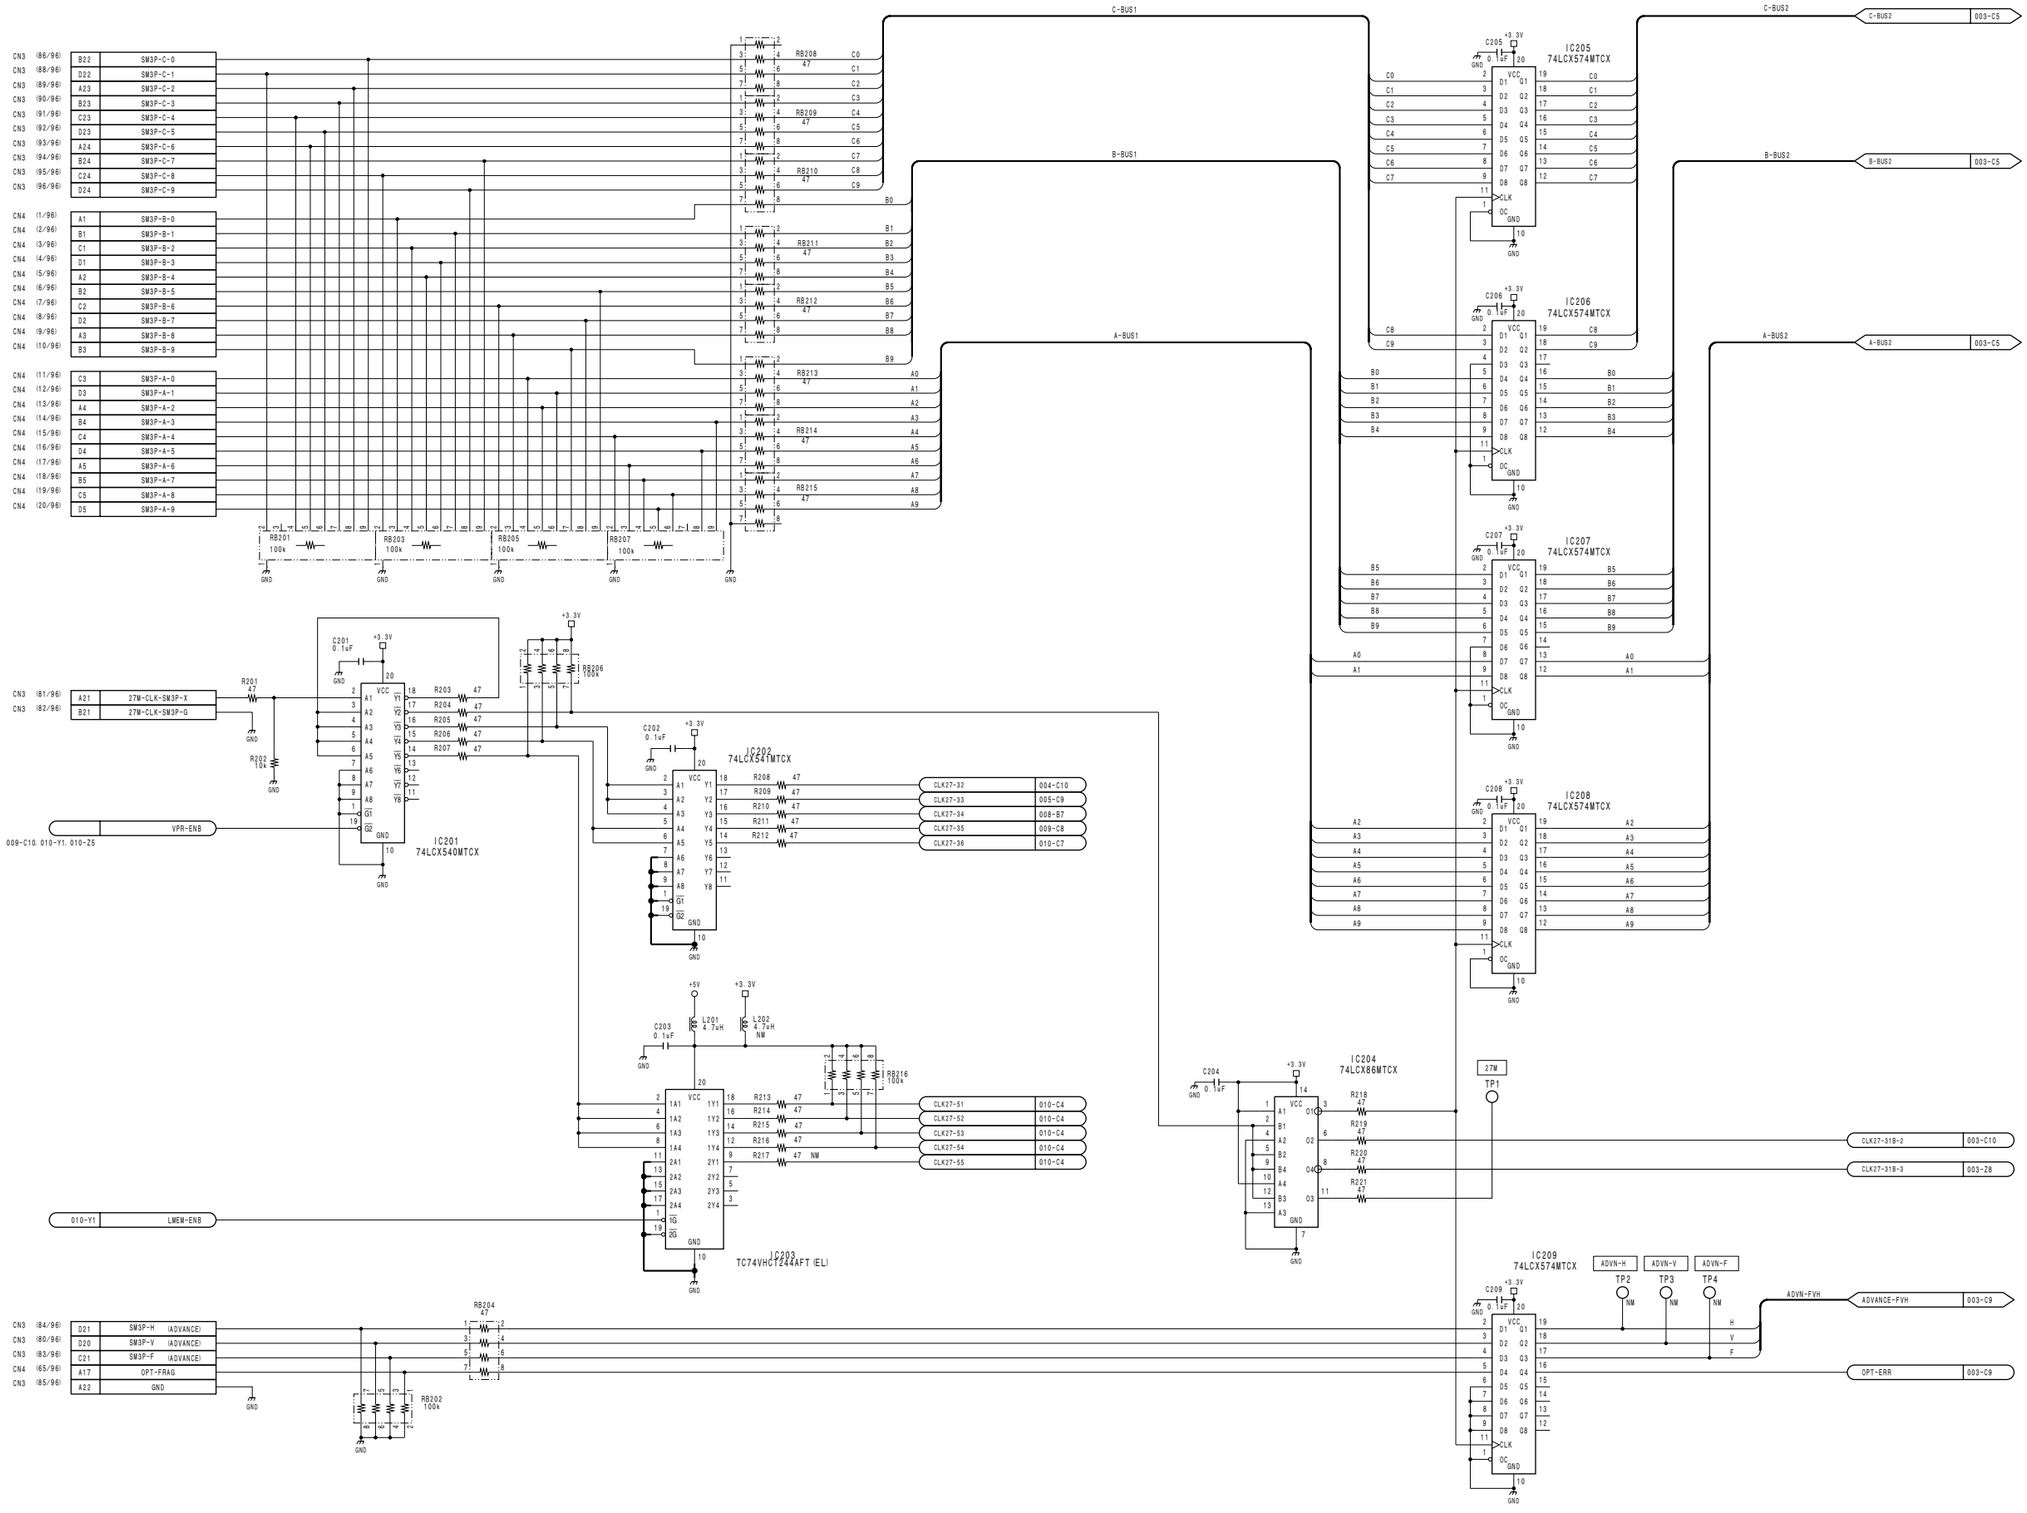

VPR-57 (2/12)
BOARD NO. 1-677-773-11, 12
BKP-9330_VPR-57_011A_2

BKP-9330 (SY) : S/N 10001 and Higher

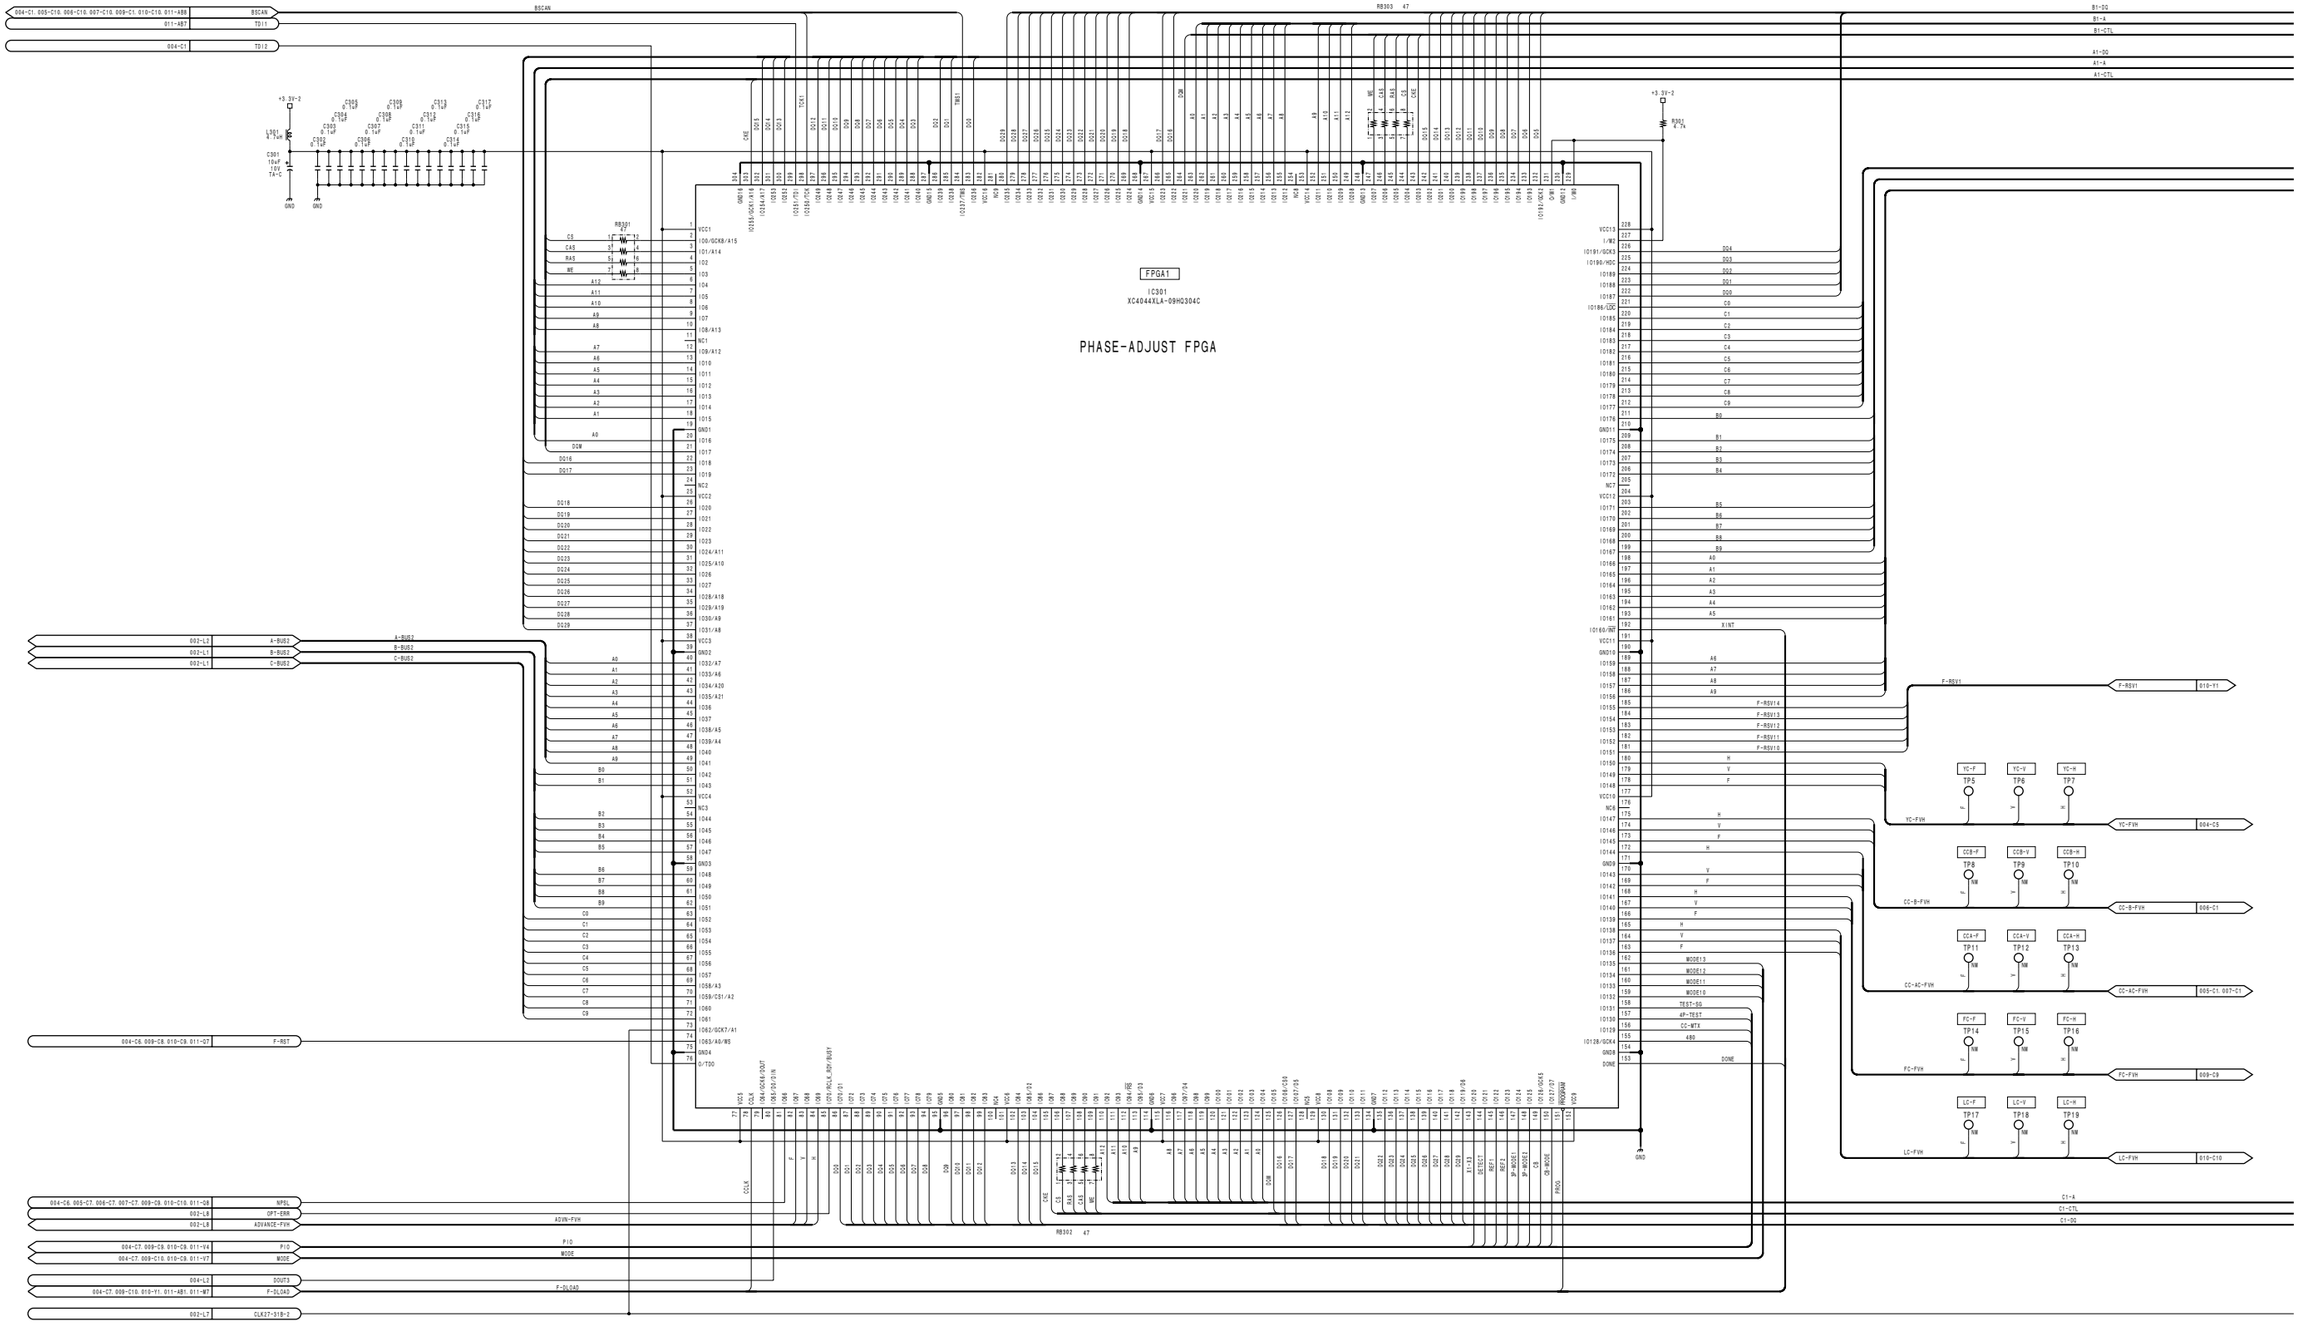

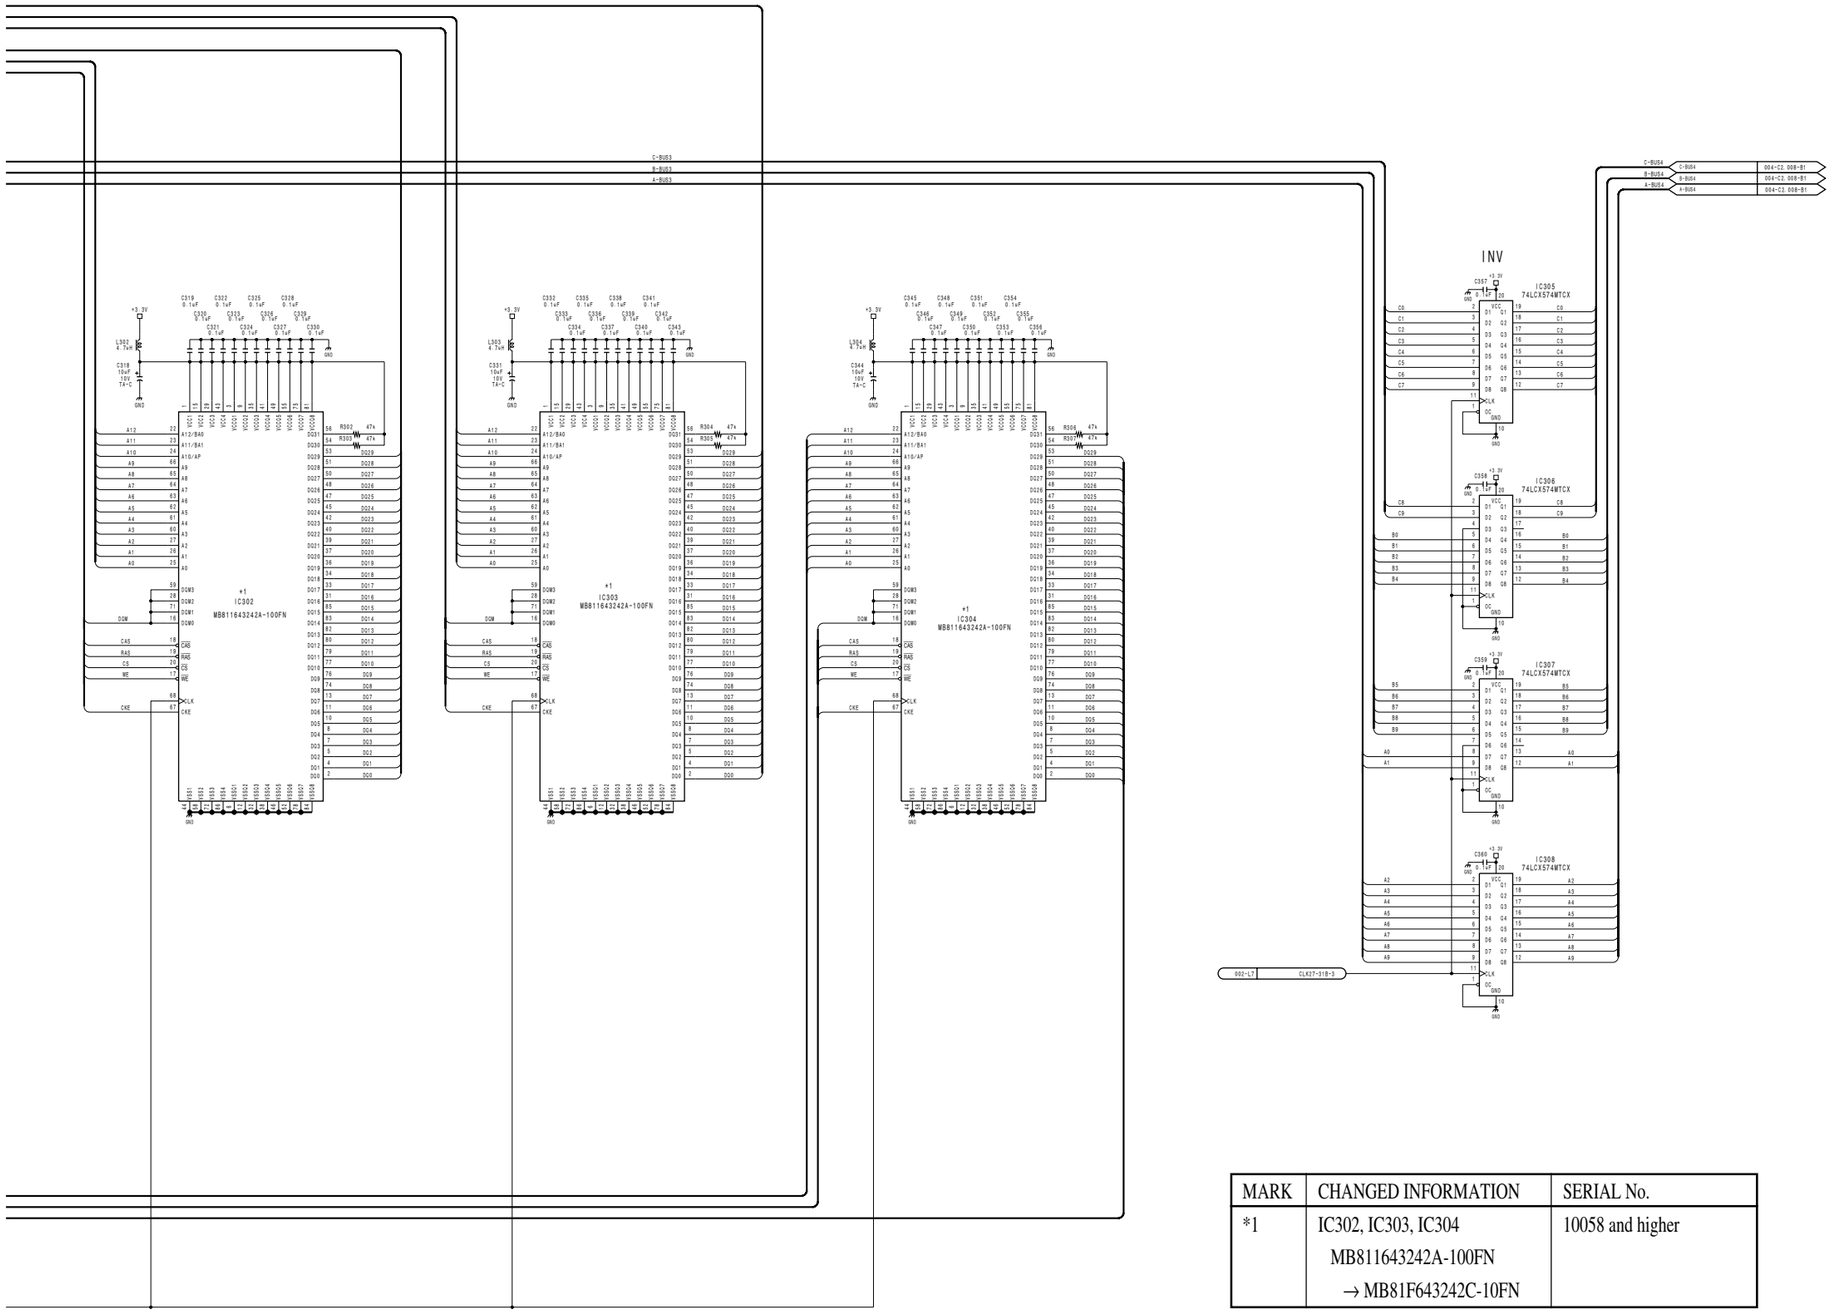

MARK	CHANGED INFORMATION	SERIAL No.
*1	IC302, IC303, IC304 MB811643242A-100FN → MB81F643242C-10FN	10058 and higher

VPR-57 (3/12)
BOARD NO. 1-677-773-11, 12
BKP-9330_VPR-57_011A_3

BKP-9330 (SY) : S/N 10001 and Higher

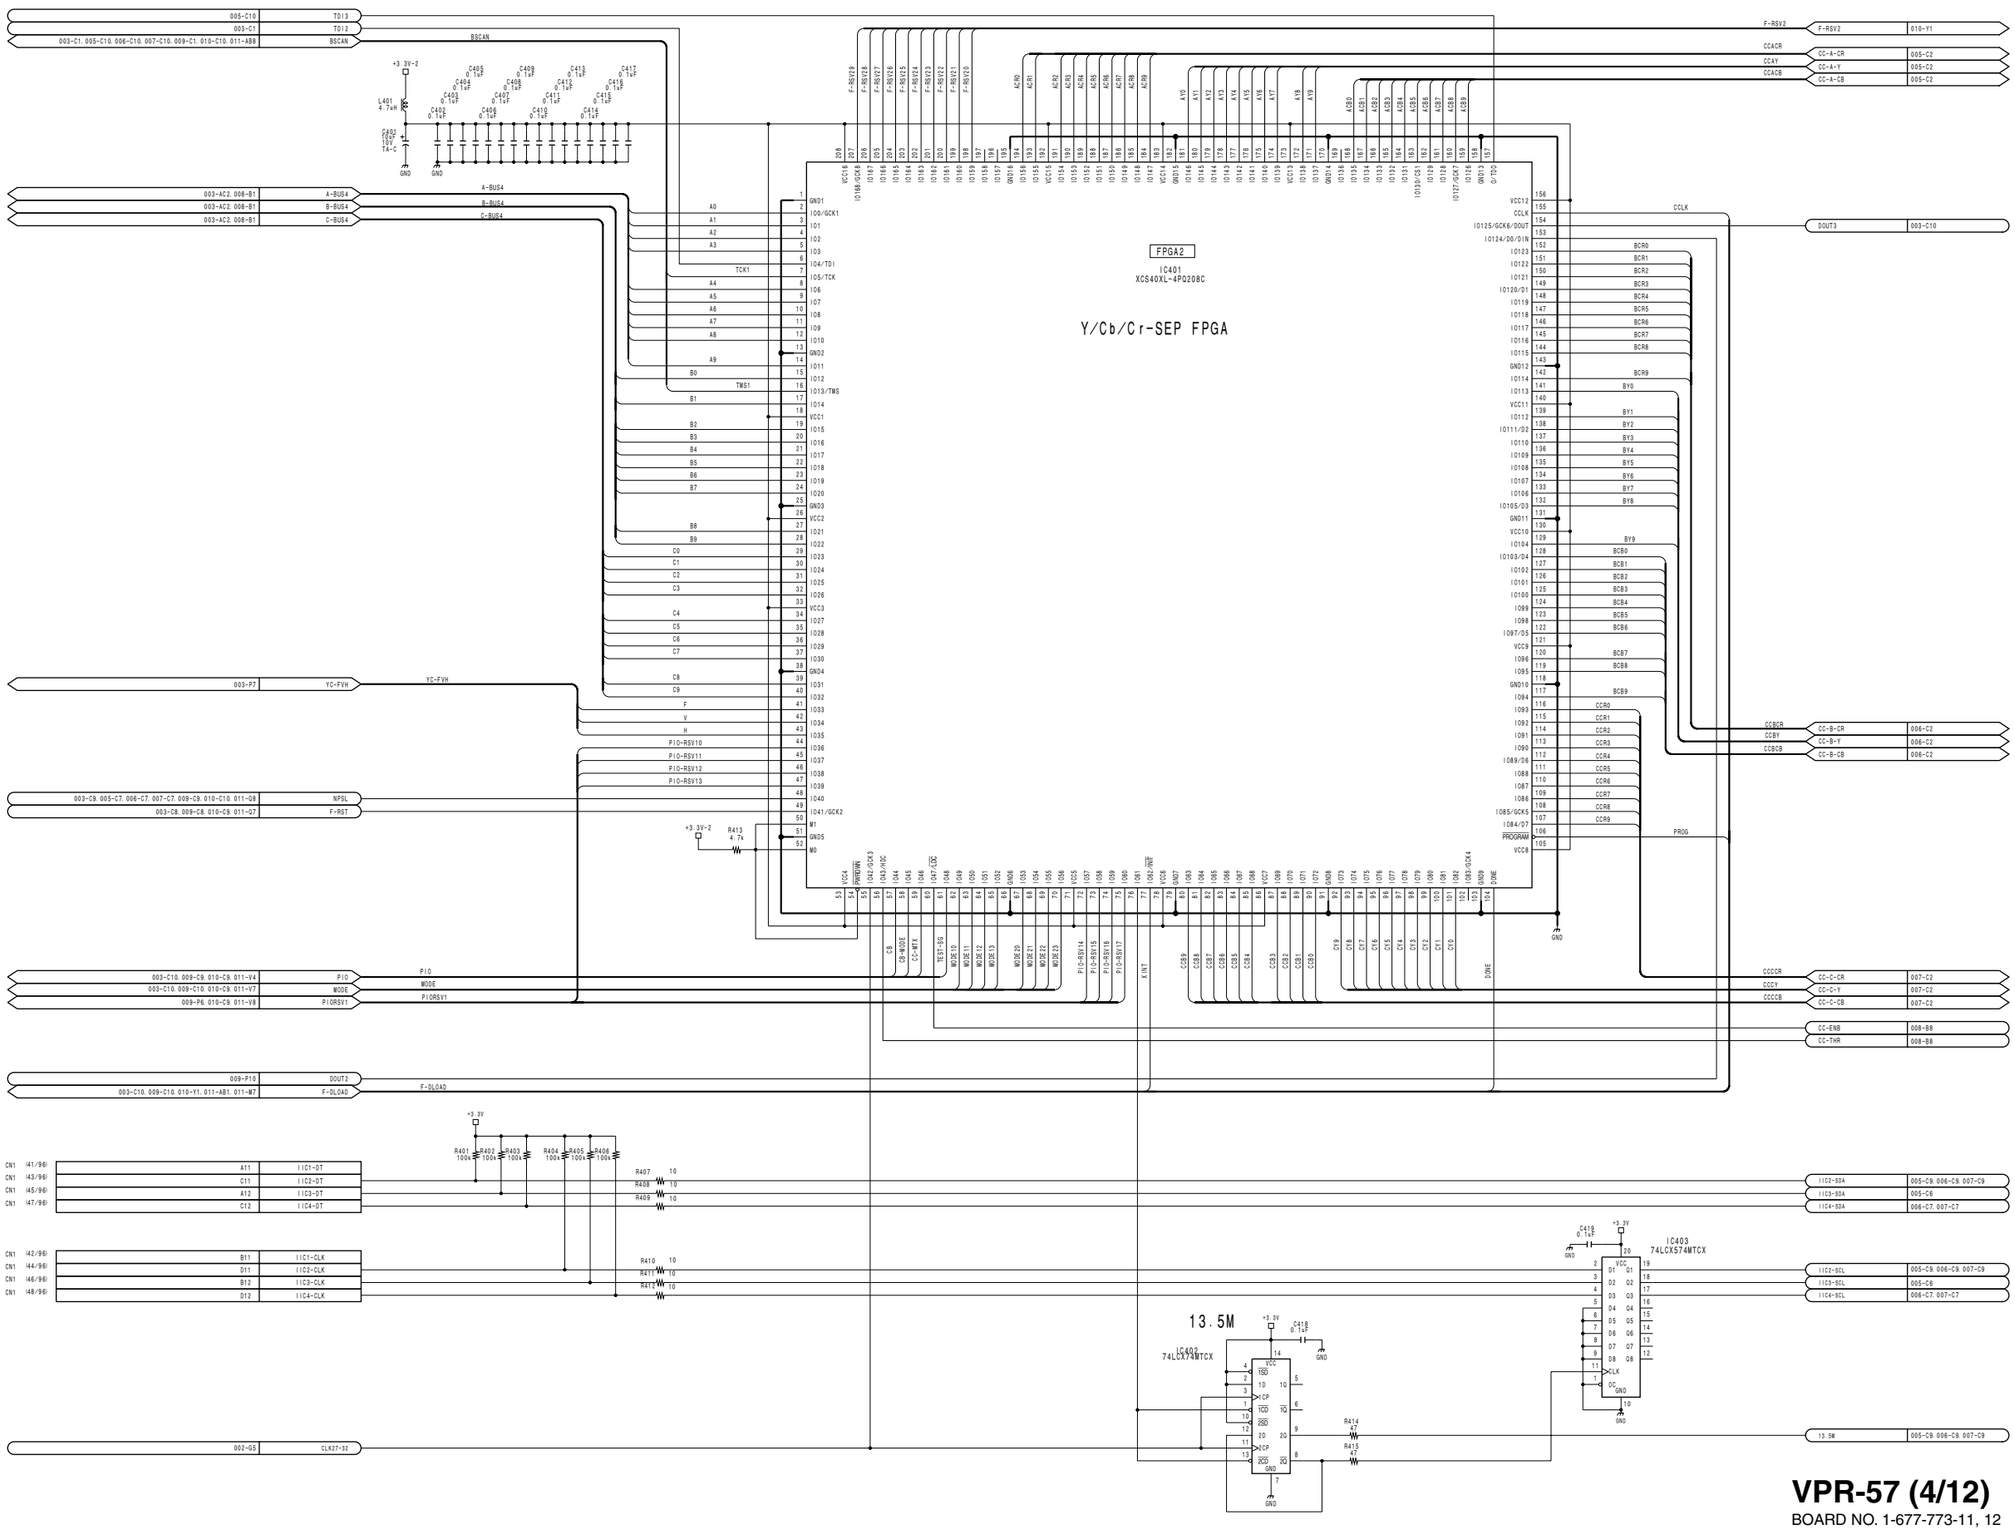

VPR-57 (4/12)

BOARD NO. 1-677-773-11, 12

BKP-9330_VPR-57_011A_4

BKP-9330 (SY) : S/N 10001 and Higher

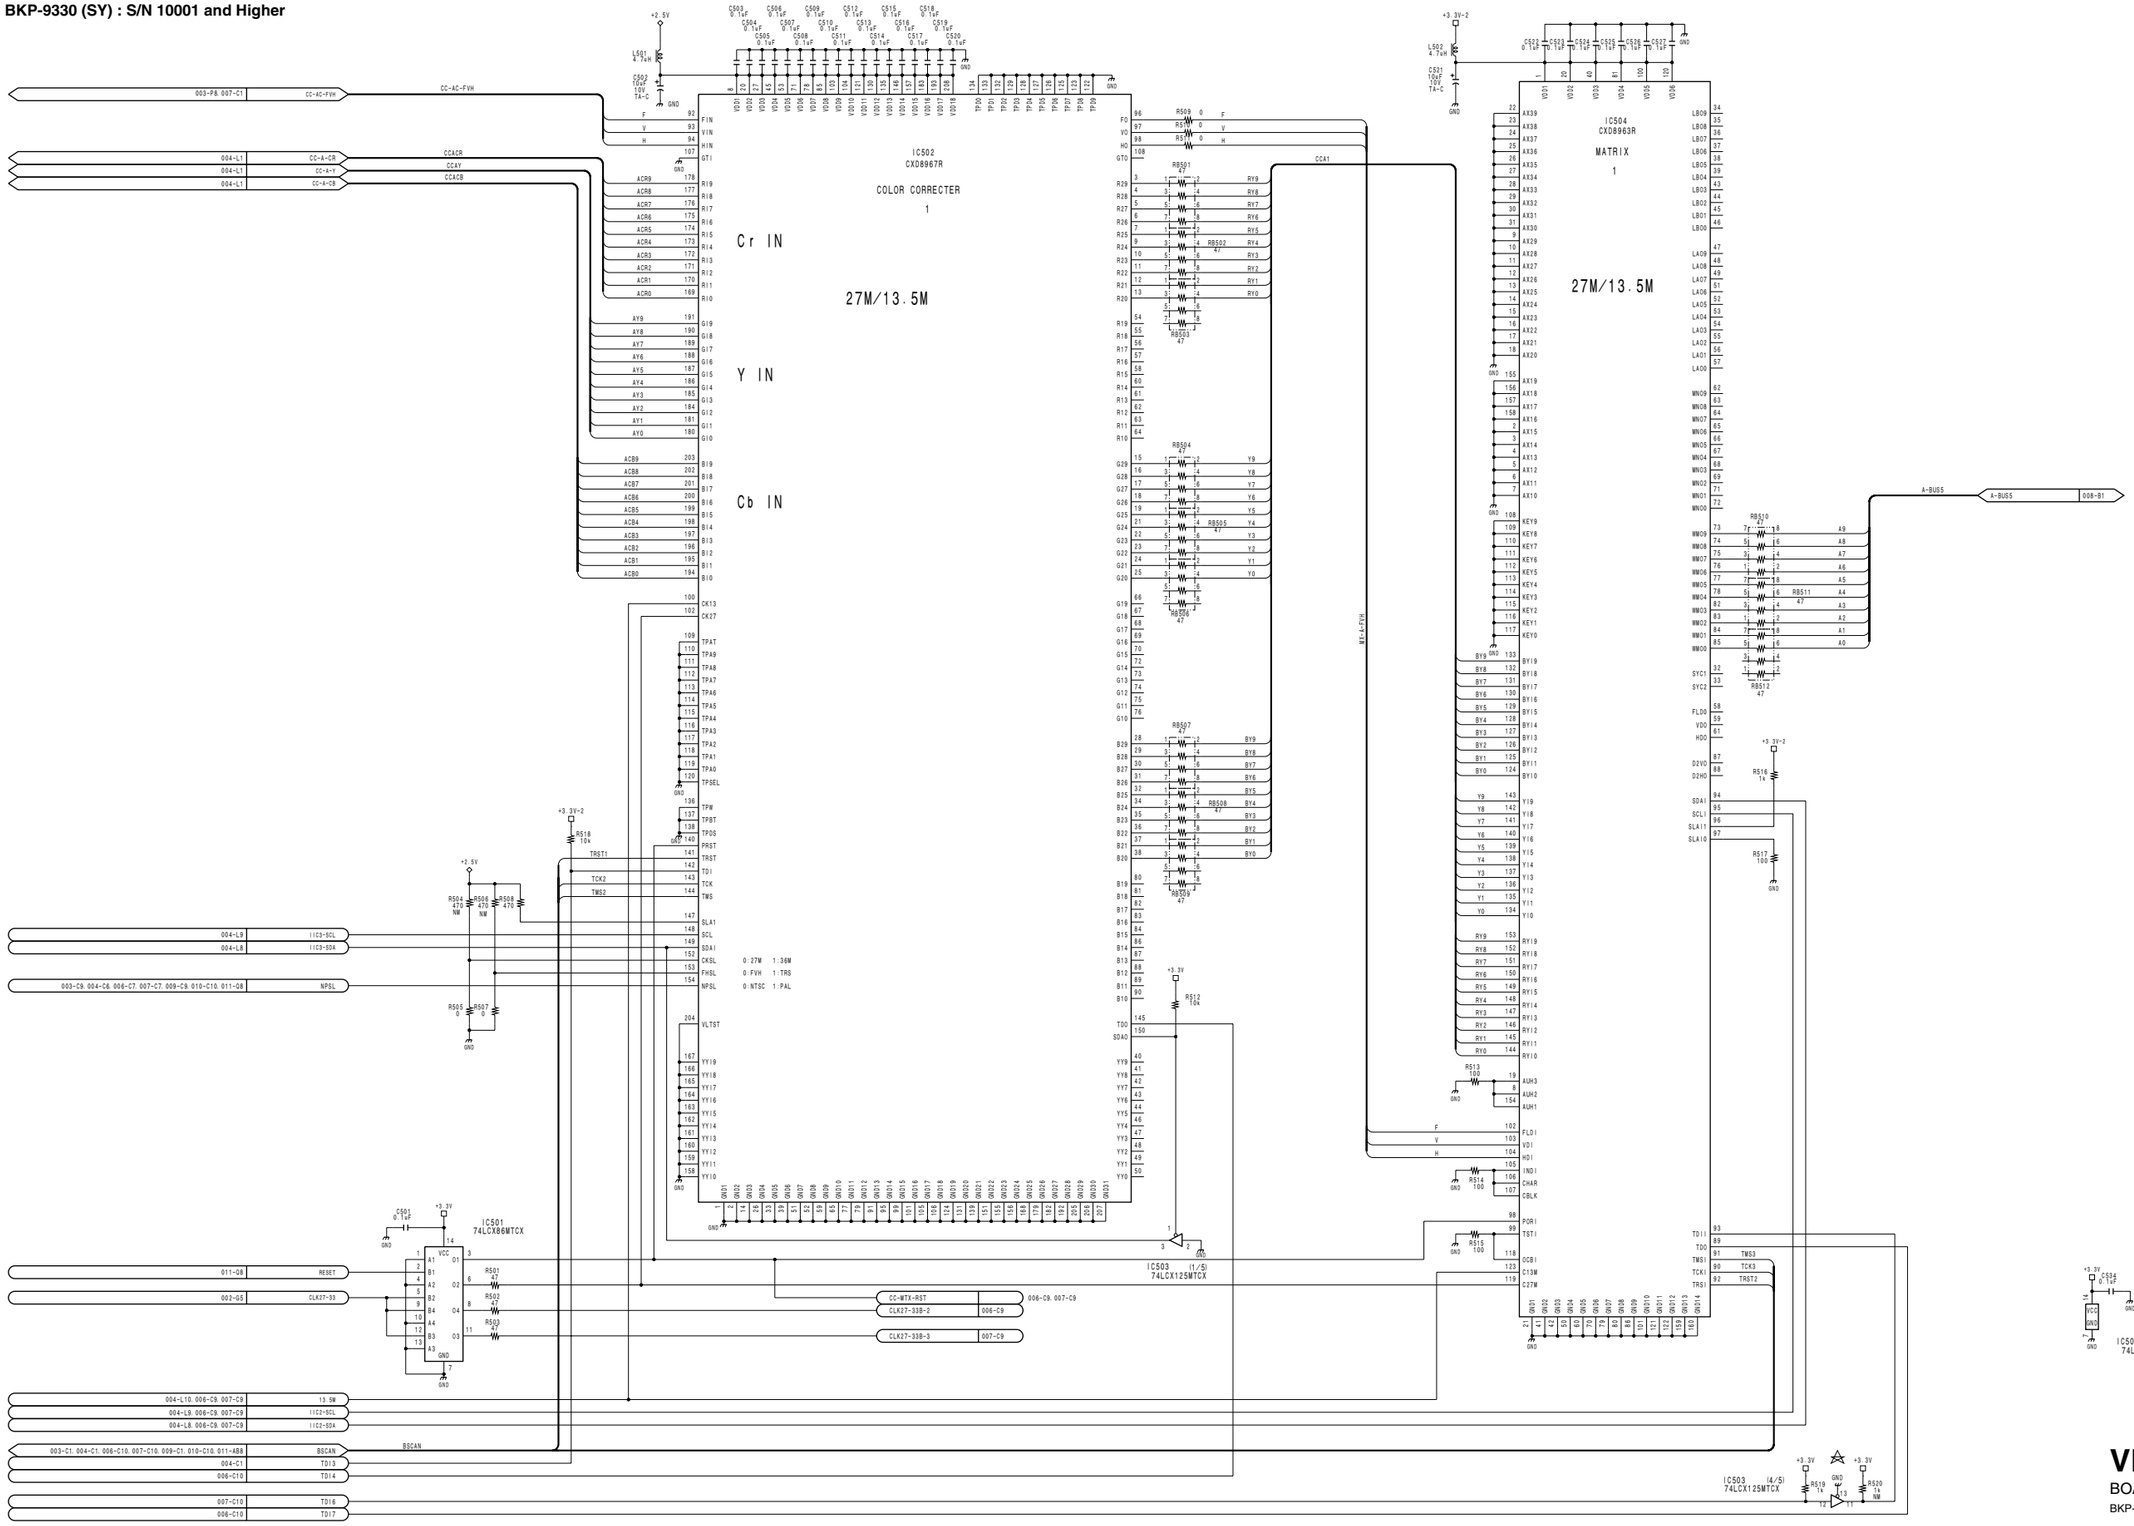

VPR-57 (5/12)
BOARD NO. 1-677-773-11, 12
BKP-9330_VPR-57_011A_5

BKP-9330 (SY) : S/N 10001 and Higher

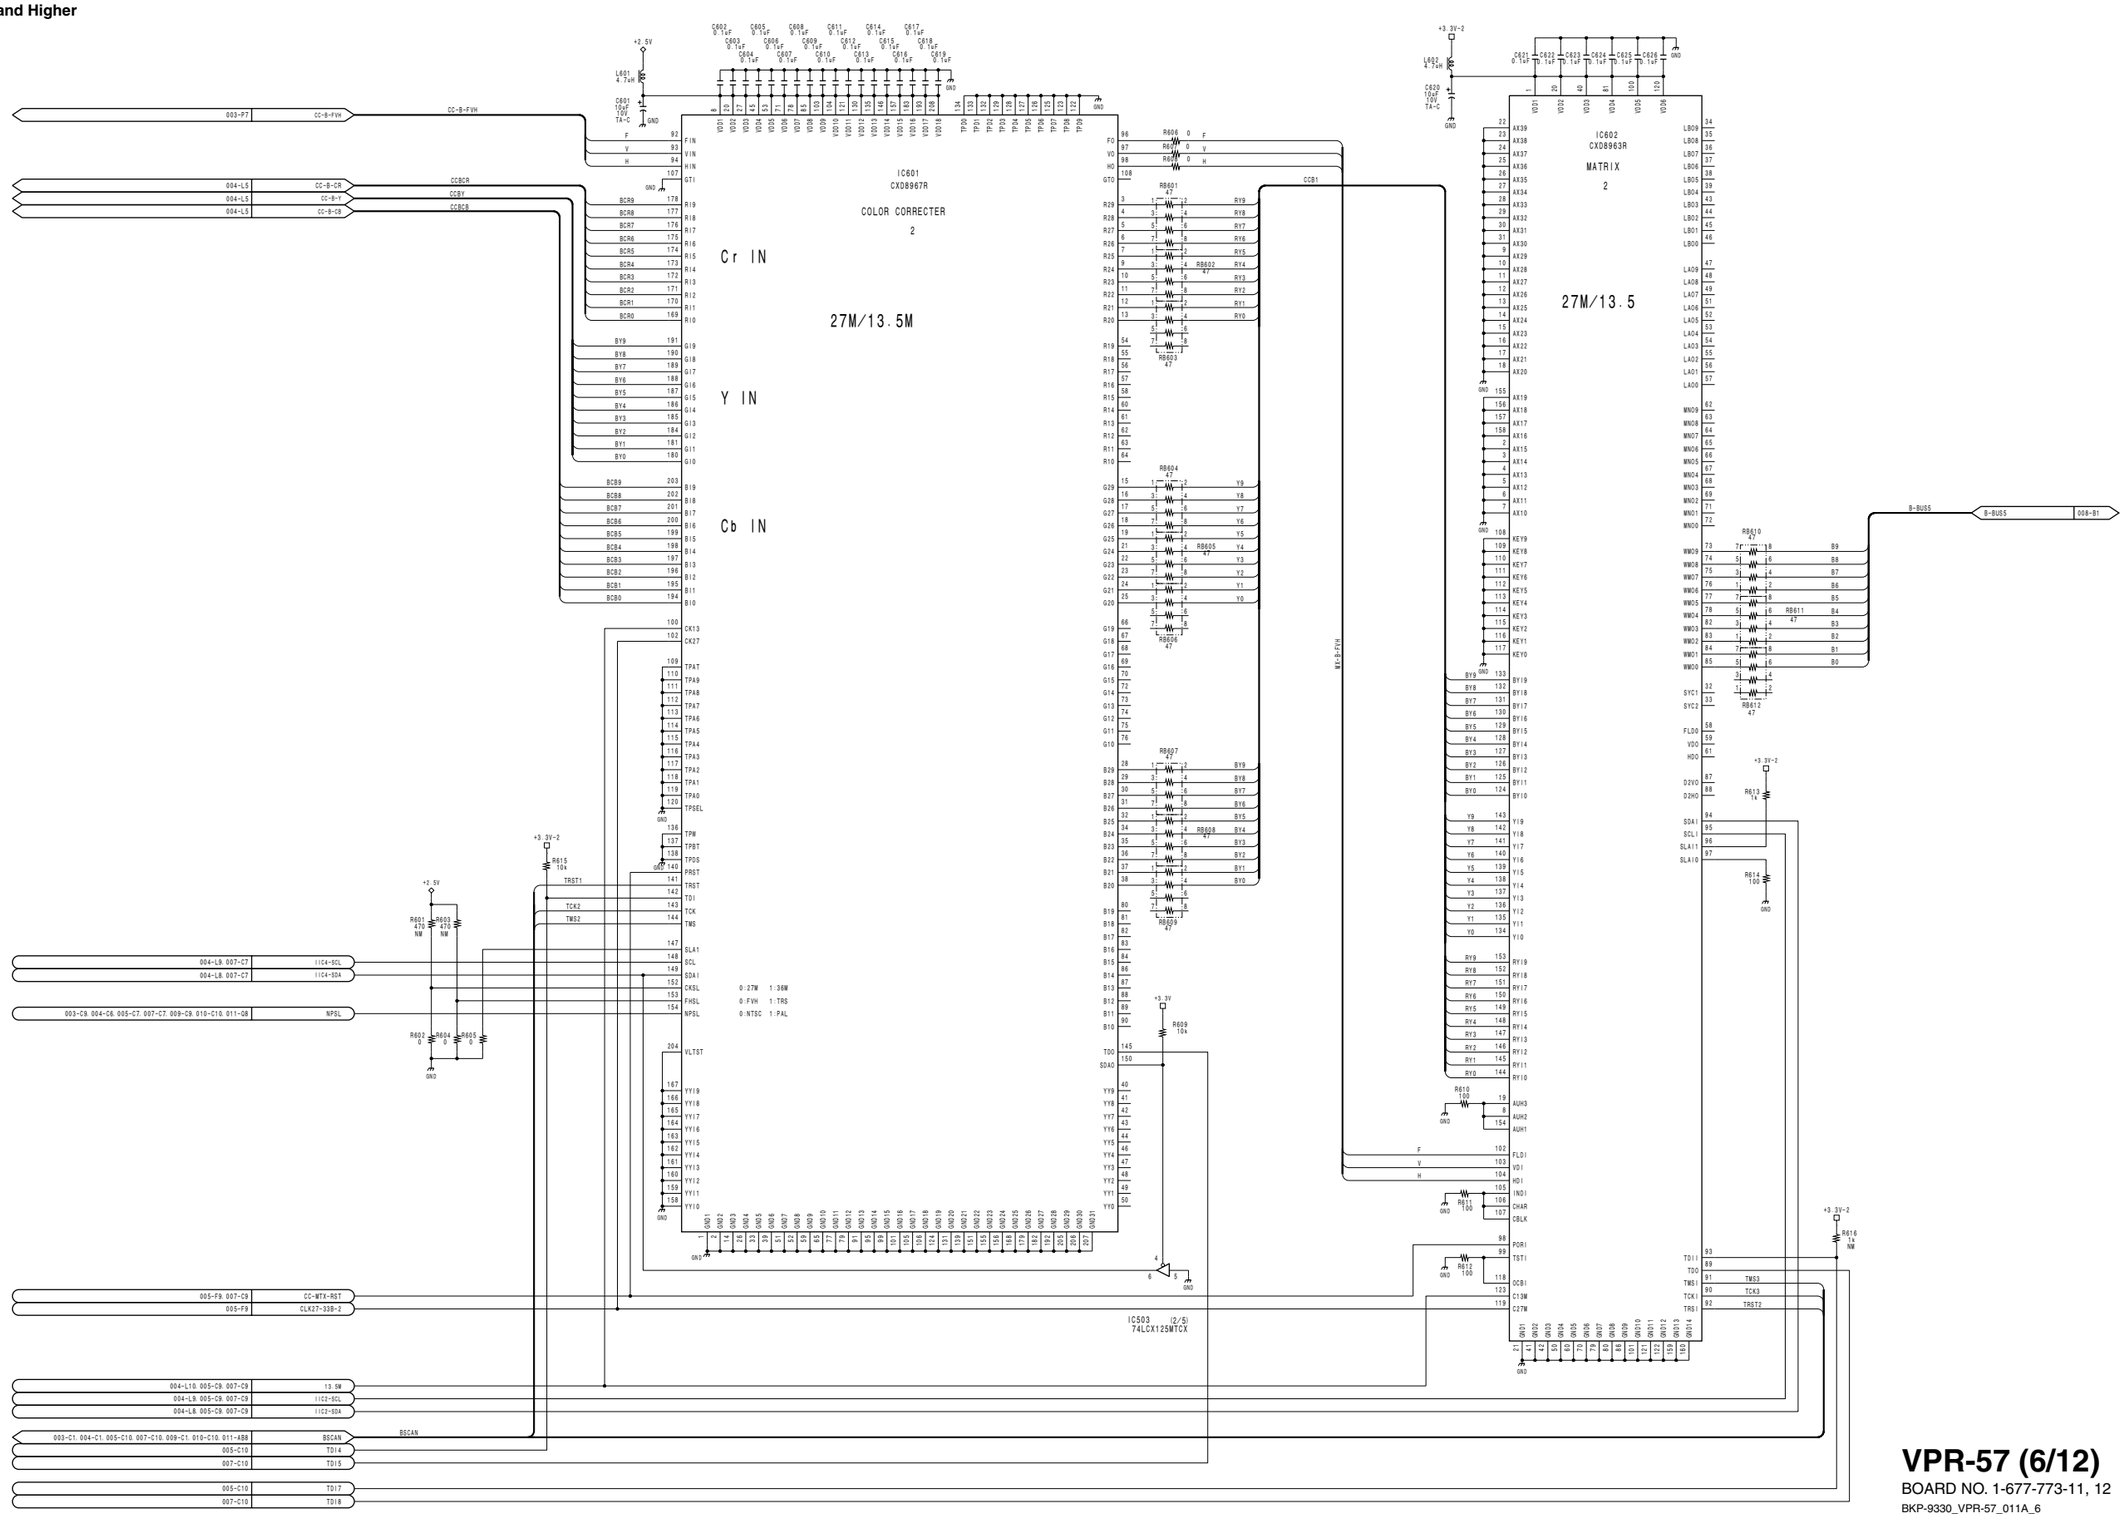

VPR-57 (6/12)
BOARD NO. 1-677-773-11, 12
BKP-9330_VPR-57_011A_6

CCU-900/900P MMV2

BKP-9330 (SY) : S/N 10001 and Higher

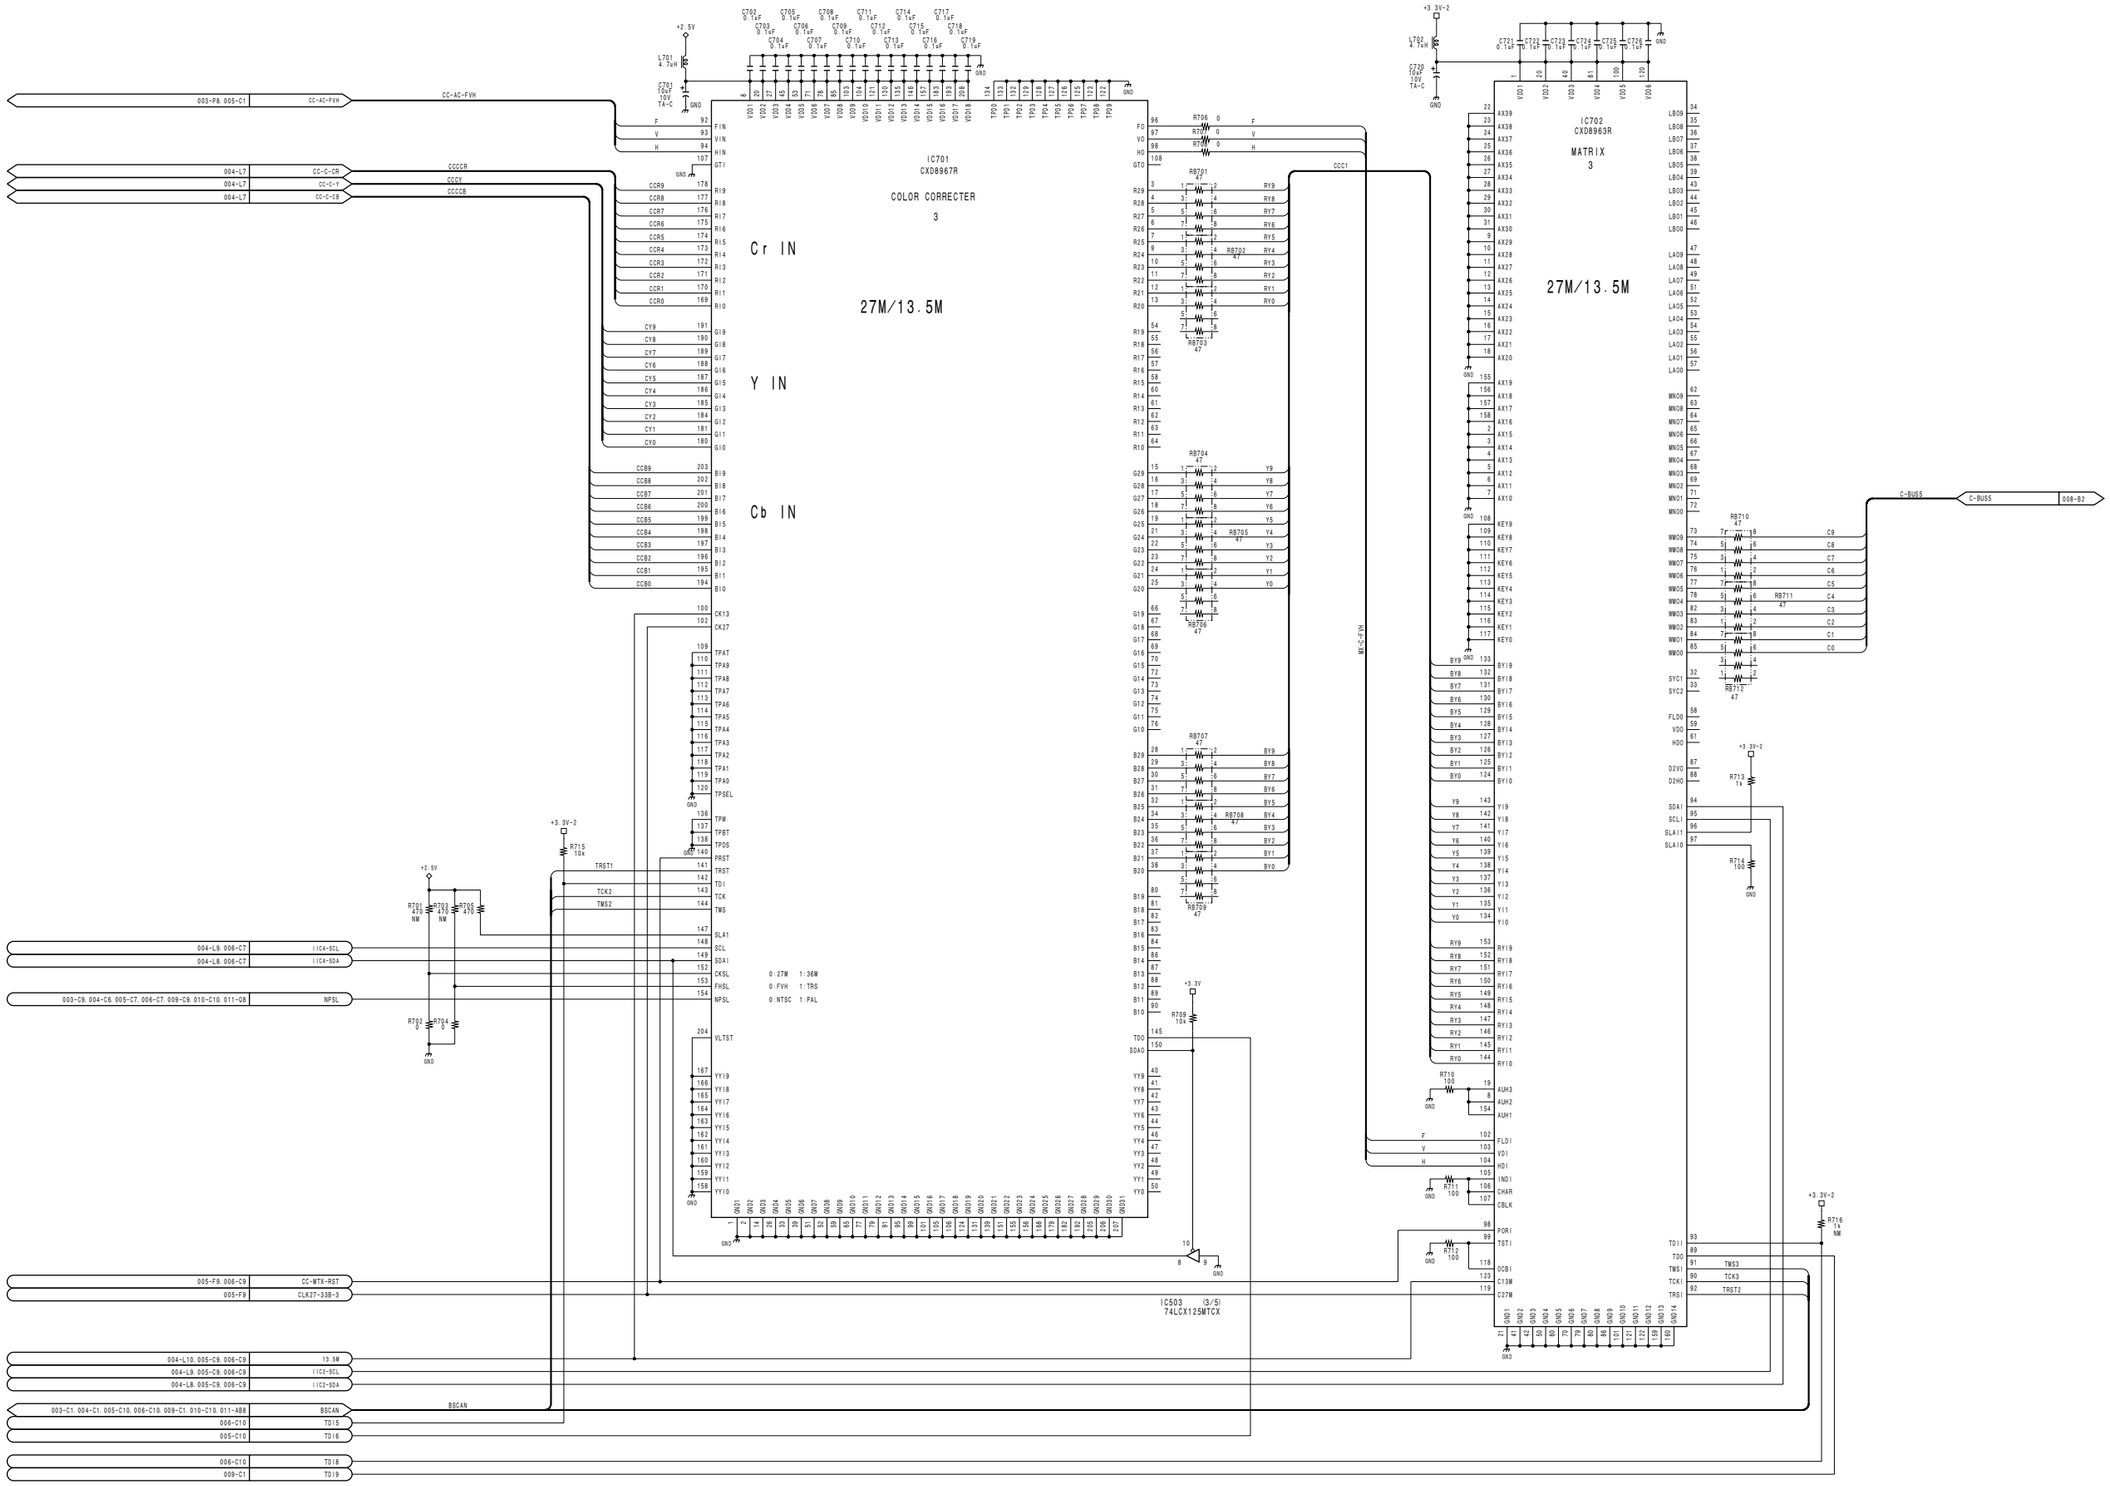

VPR-57 (7/12)
BOARD NO. 1-677-773-11, 12
BKP-9330_VPR-57_011A_7

BKP-9330 (SY) : S/N 10001 and Higher

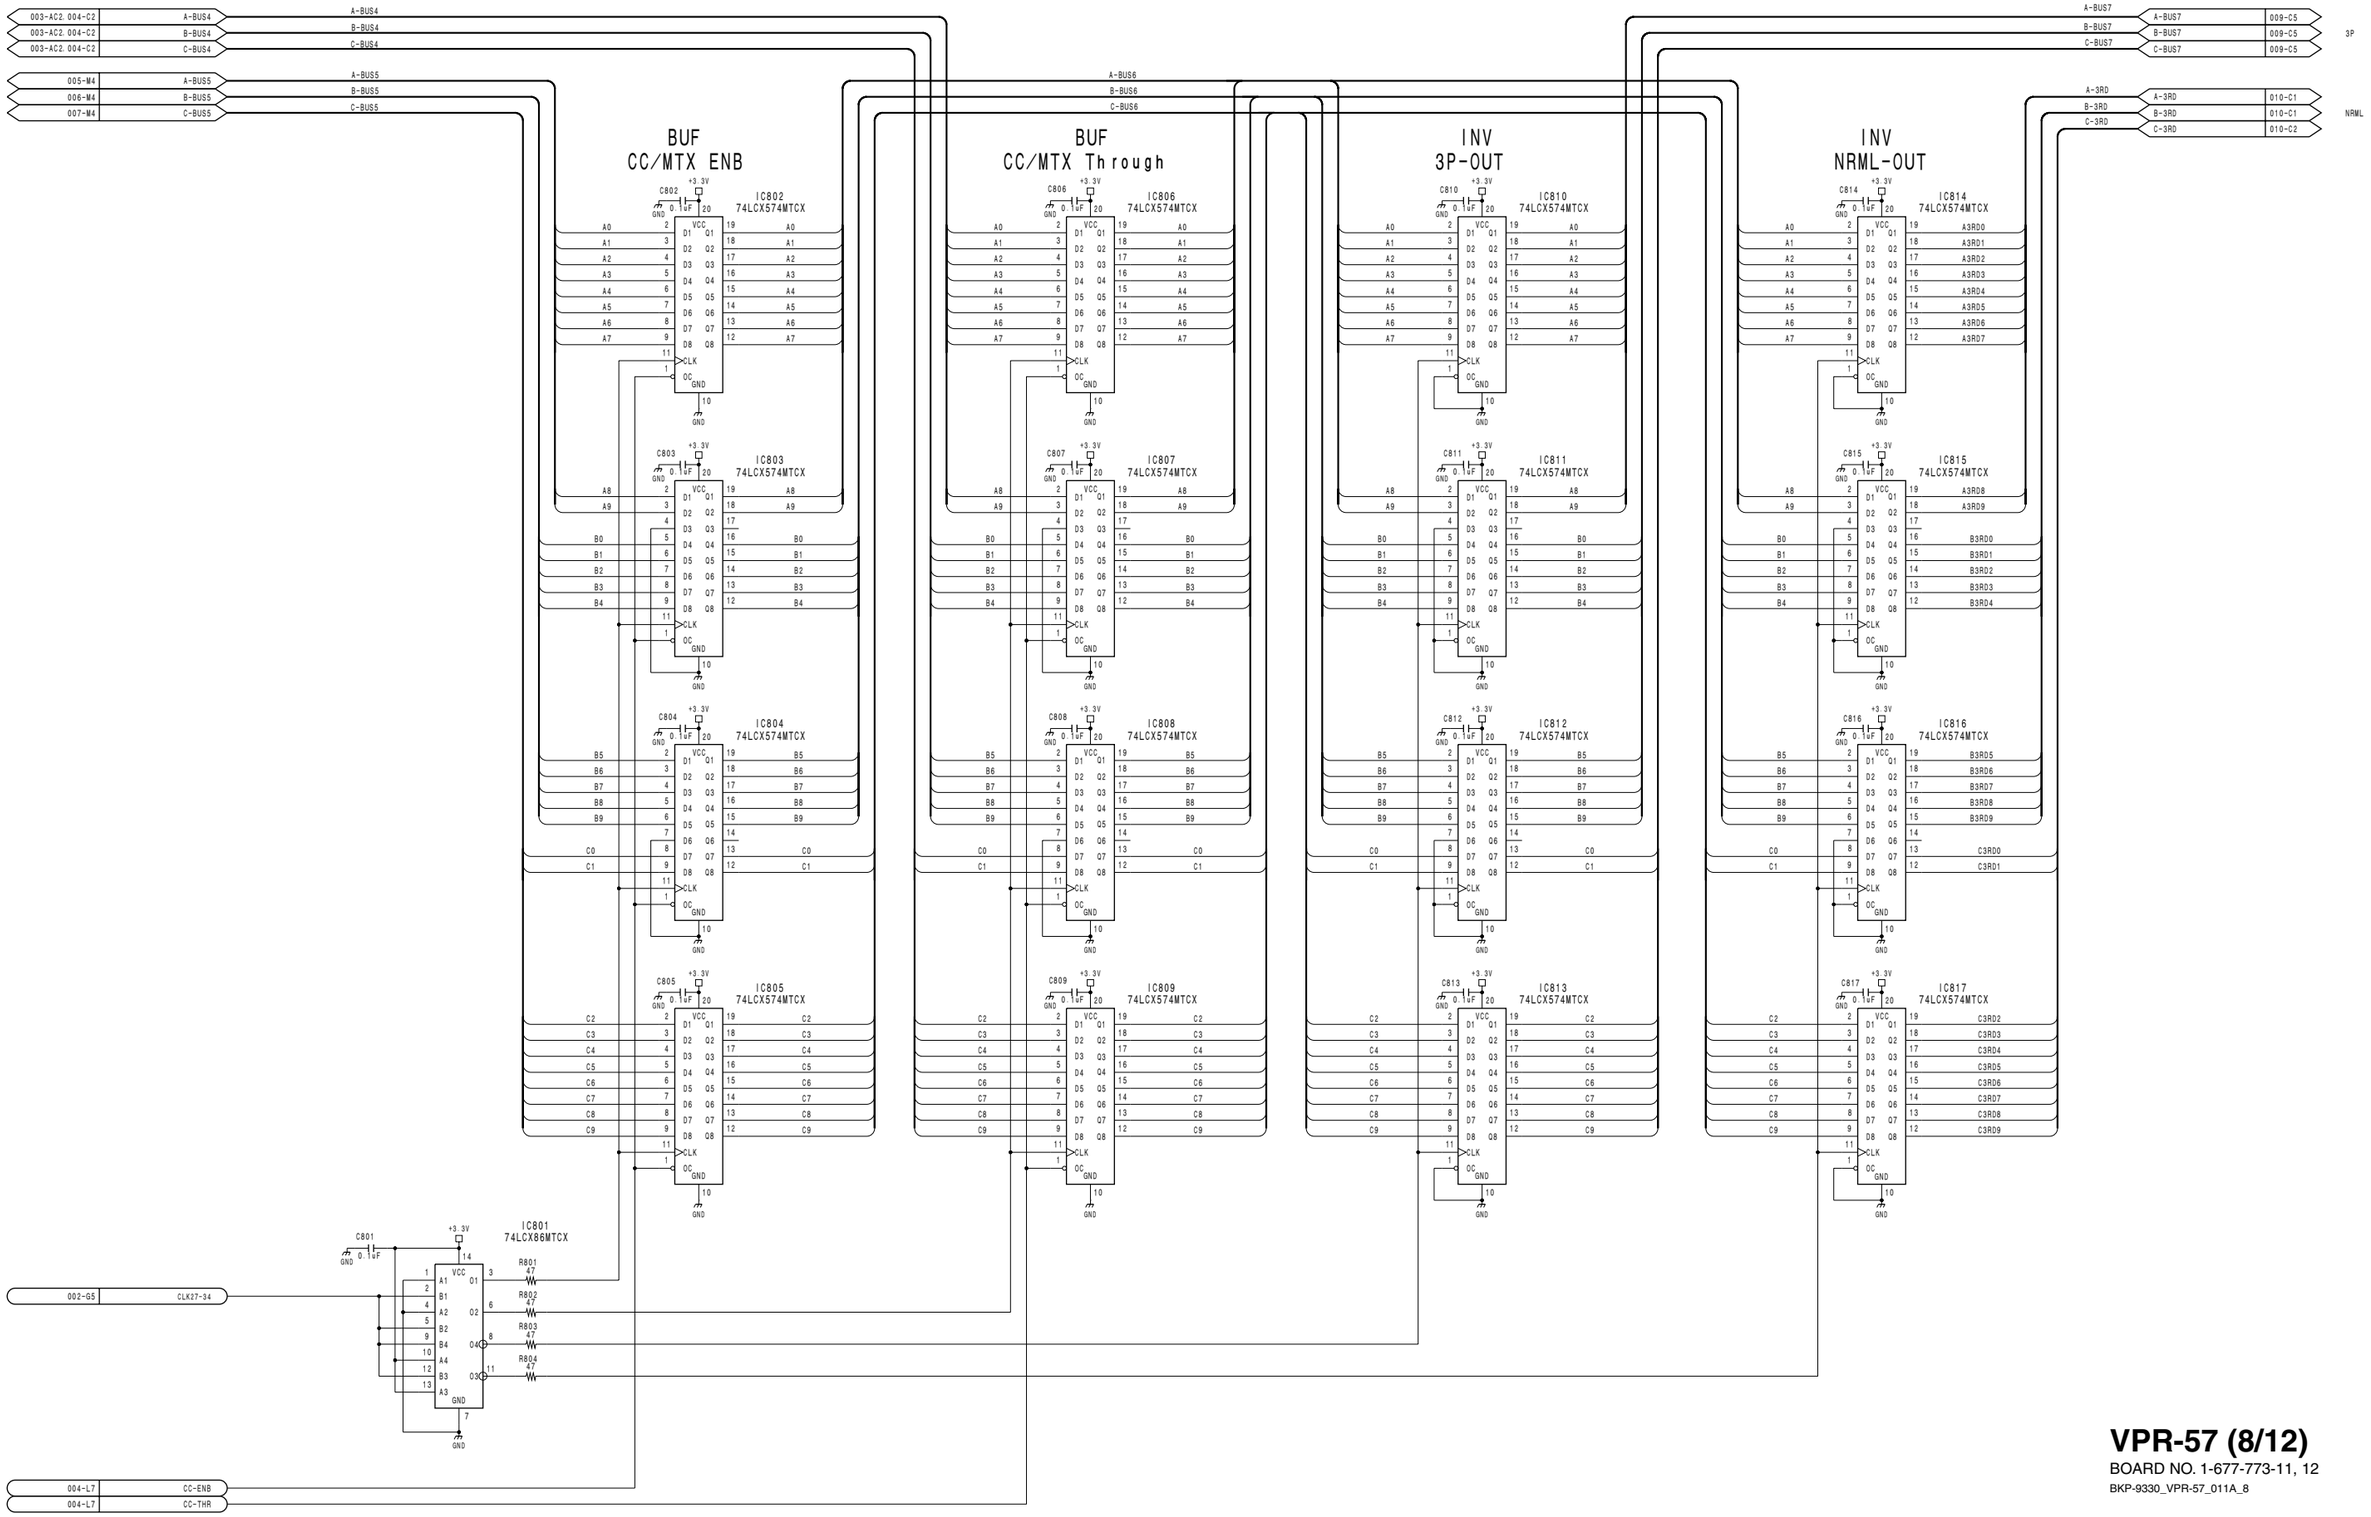

CCU-900/900P MMV2

VPR-57 (8/12)
BOARD NO. 1-677-773-11, 12
BKP-9330_VPR-57_011A_8

BKP-9330 (SY) : S/N 10001 and Higher

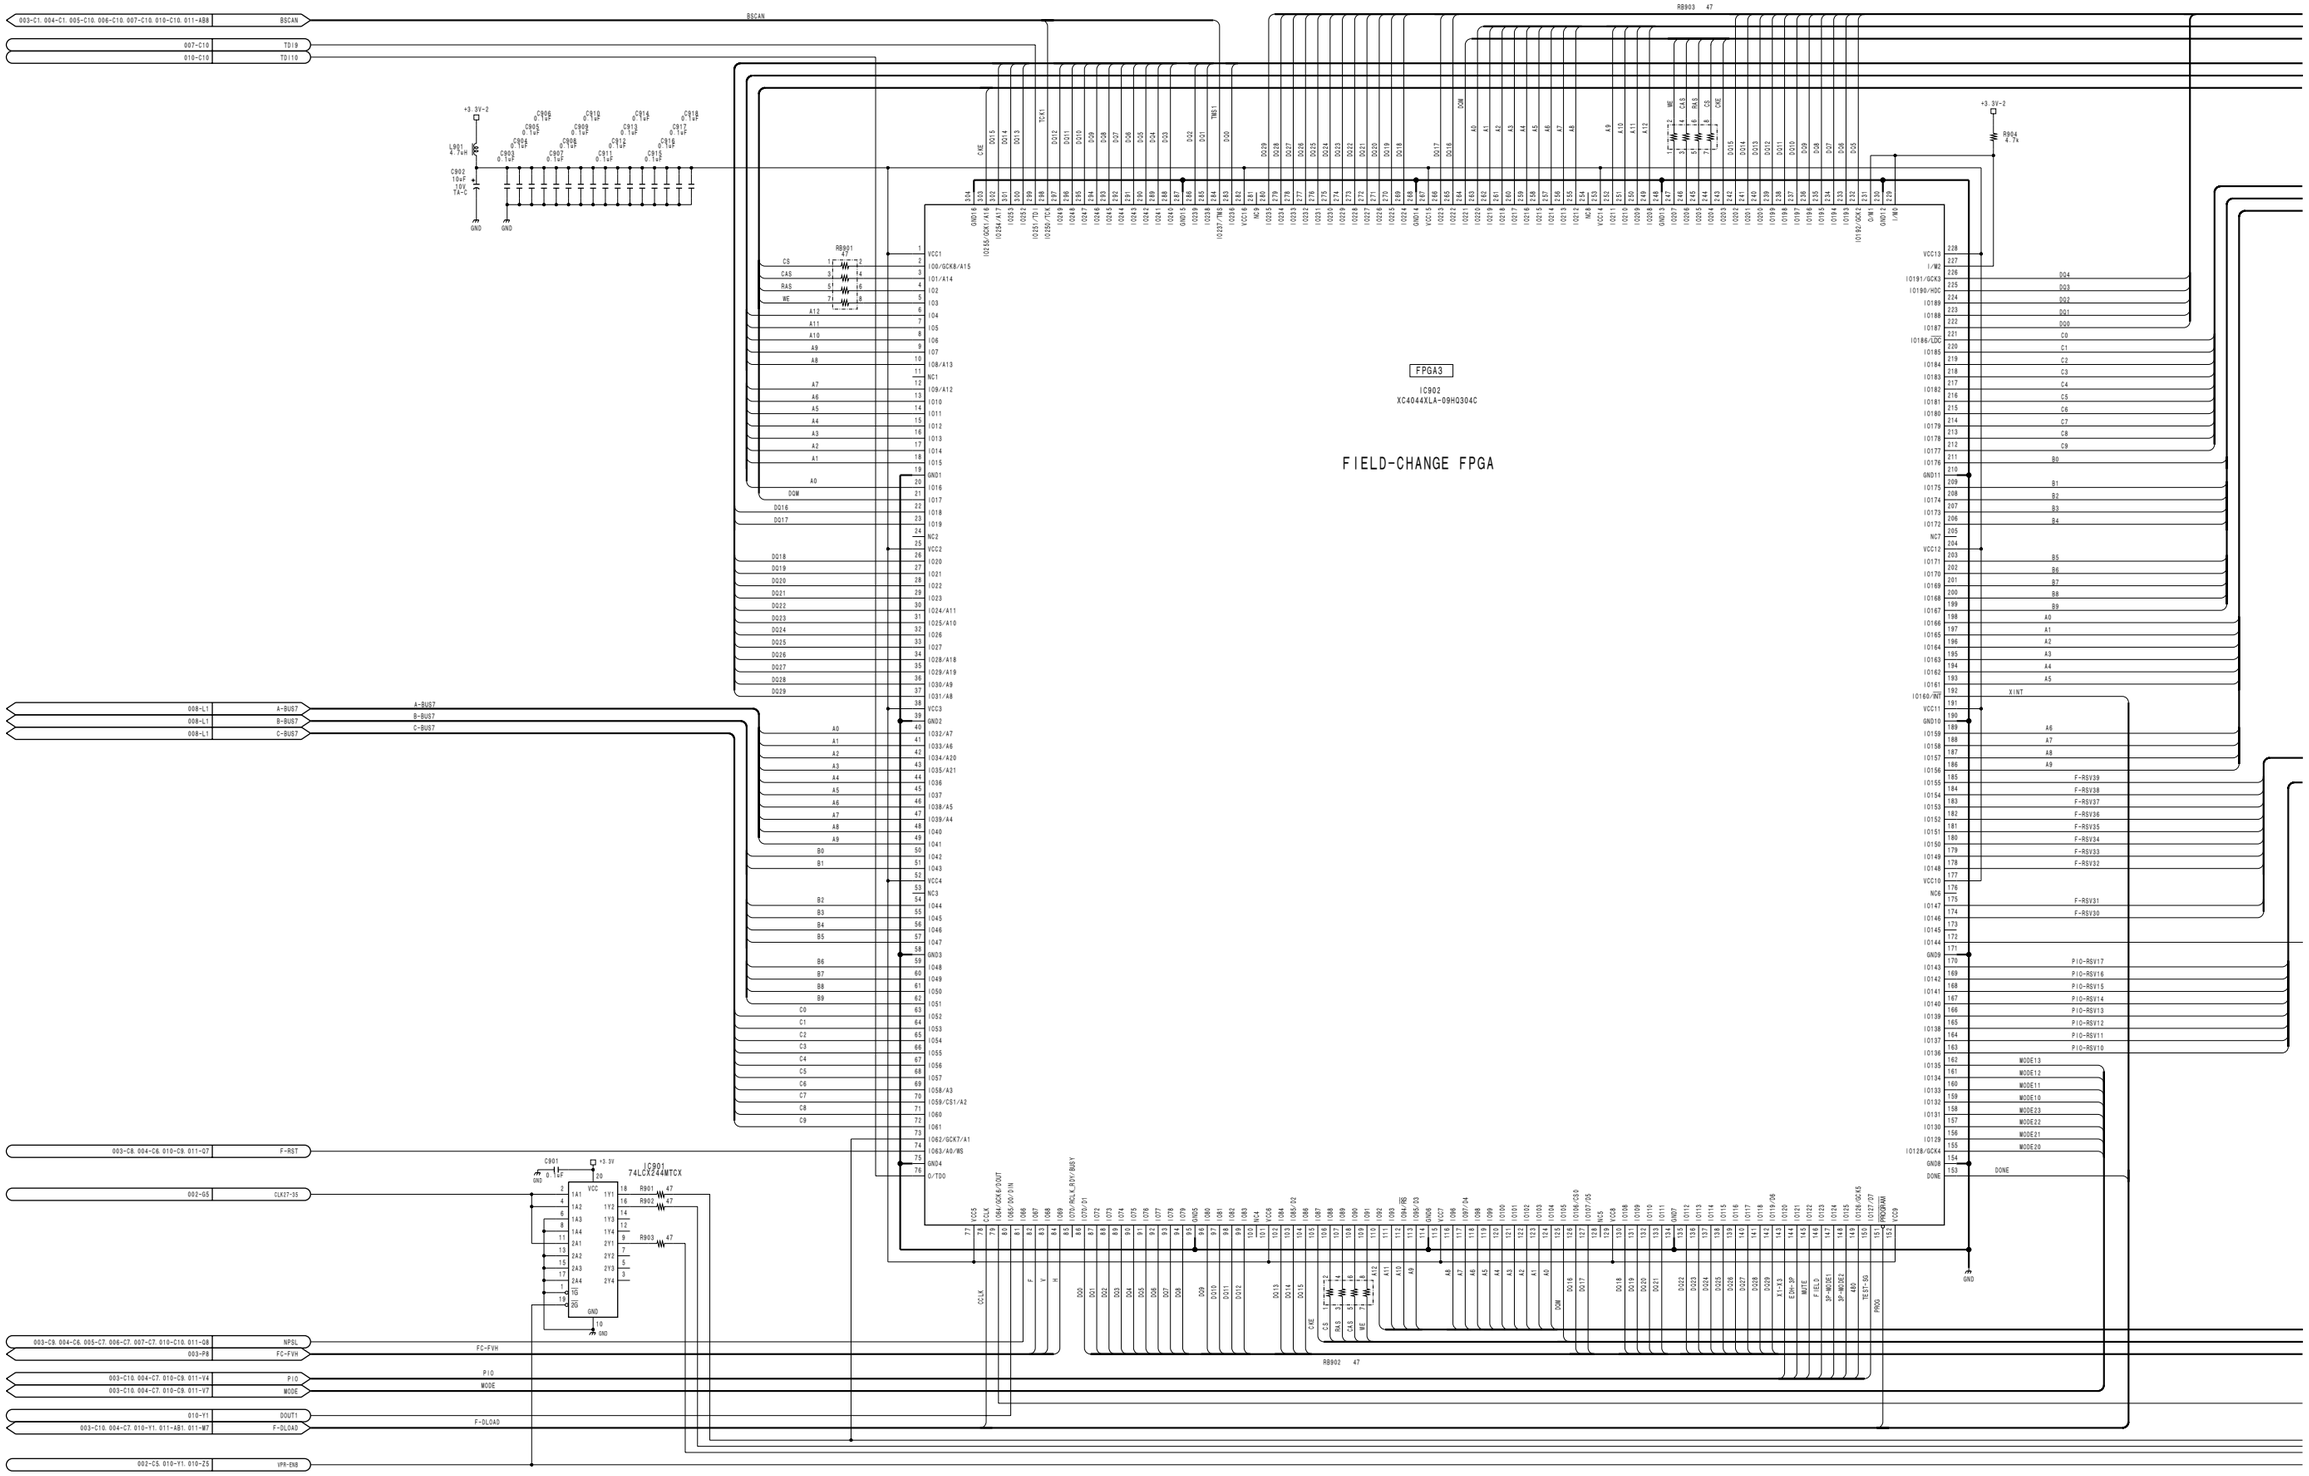

MARK	CHANGED INFORMATION	SERIAL No.
*1	IC903, IC904, IC905 MB811643242A-100FN → MB81F643242C-10FN	10058 and higher

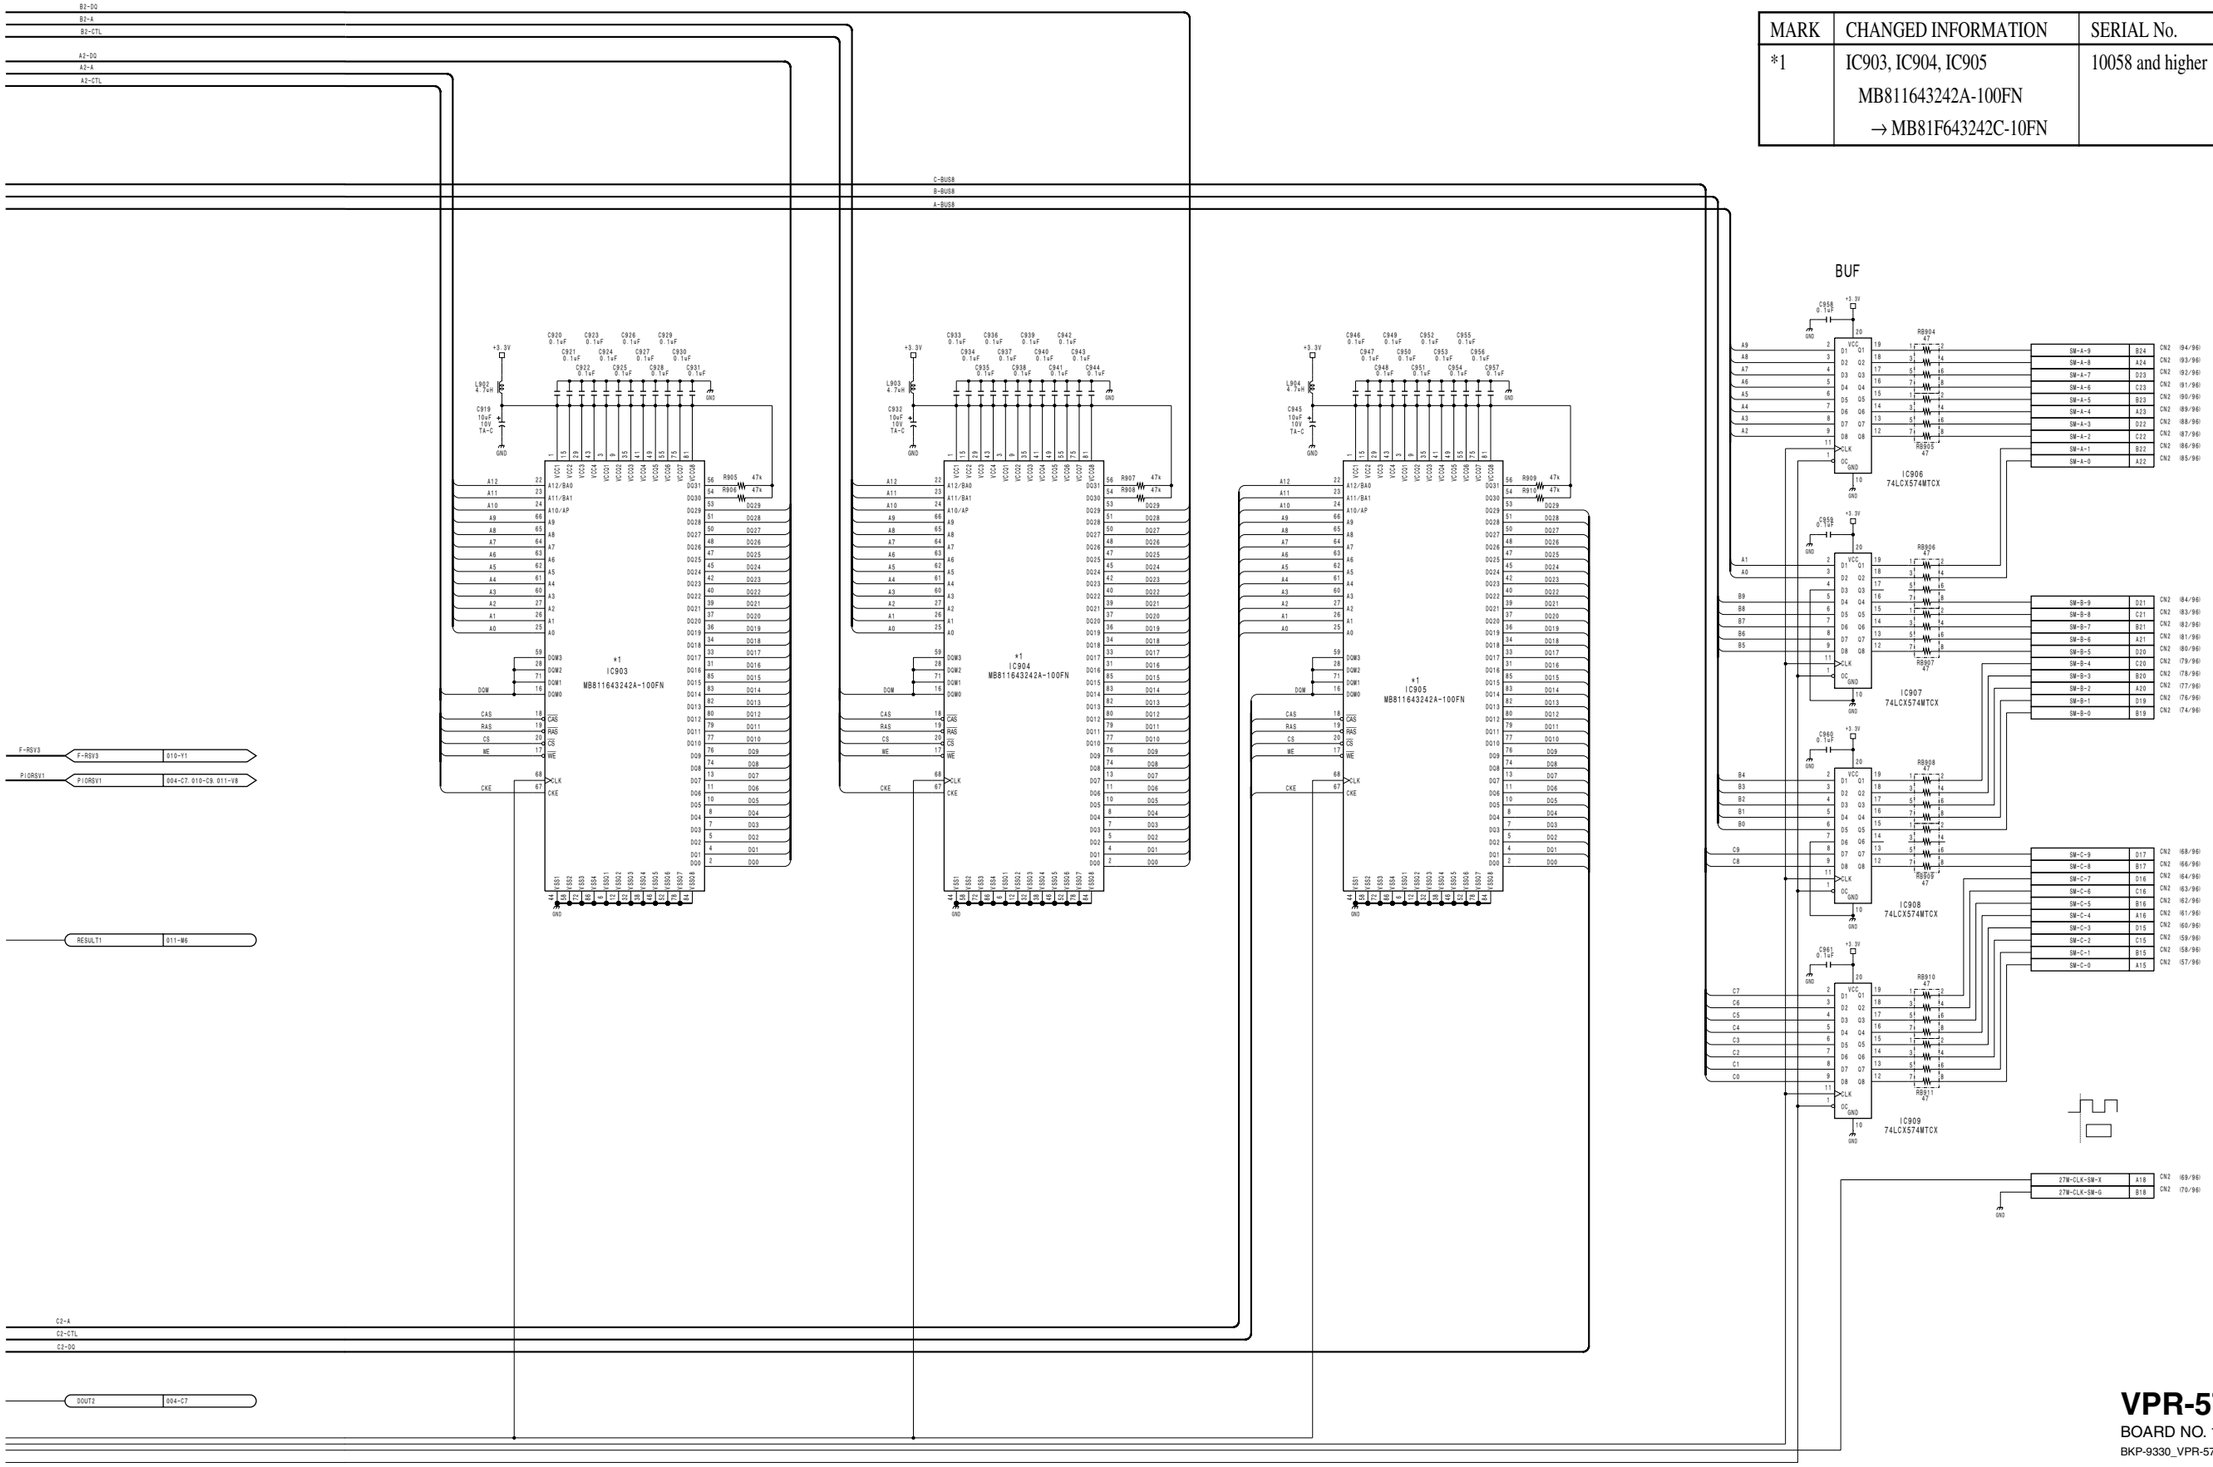

VPR-57 (9/12)

BOARD NO. 1-677-773-11, 12

BKP-9330_VPR-57_011A_9

BKP-9330 (SY) : S/N 10001 and Higher

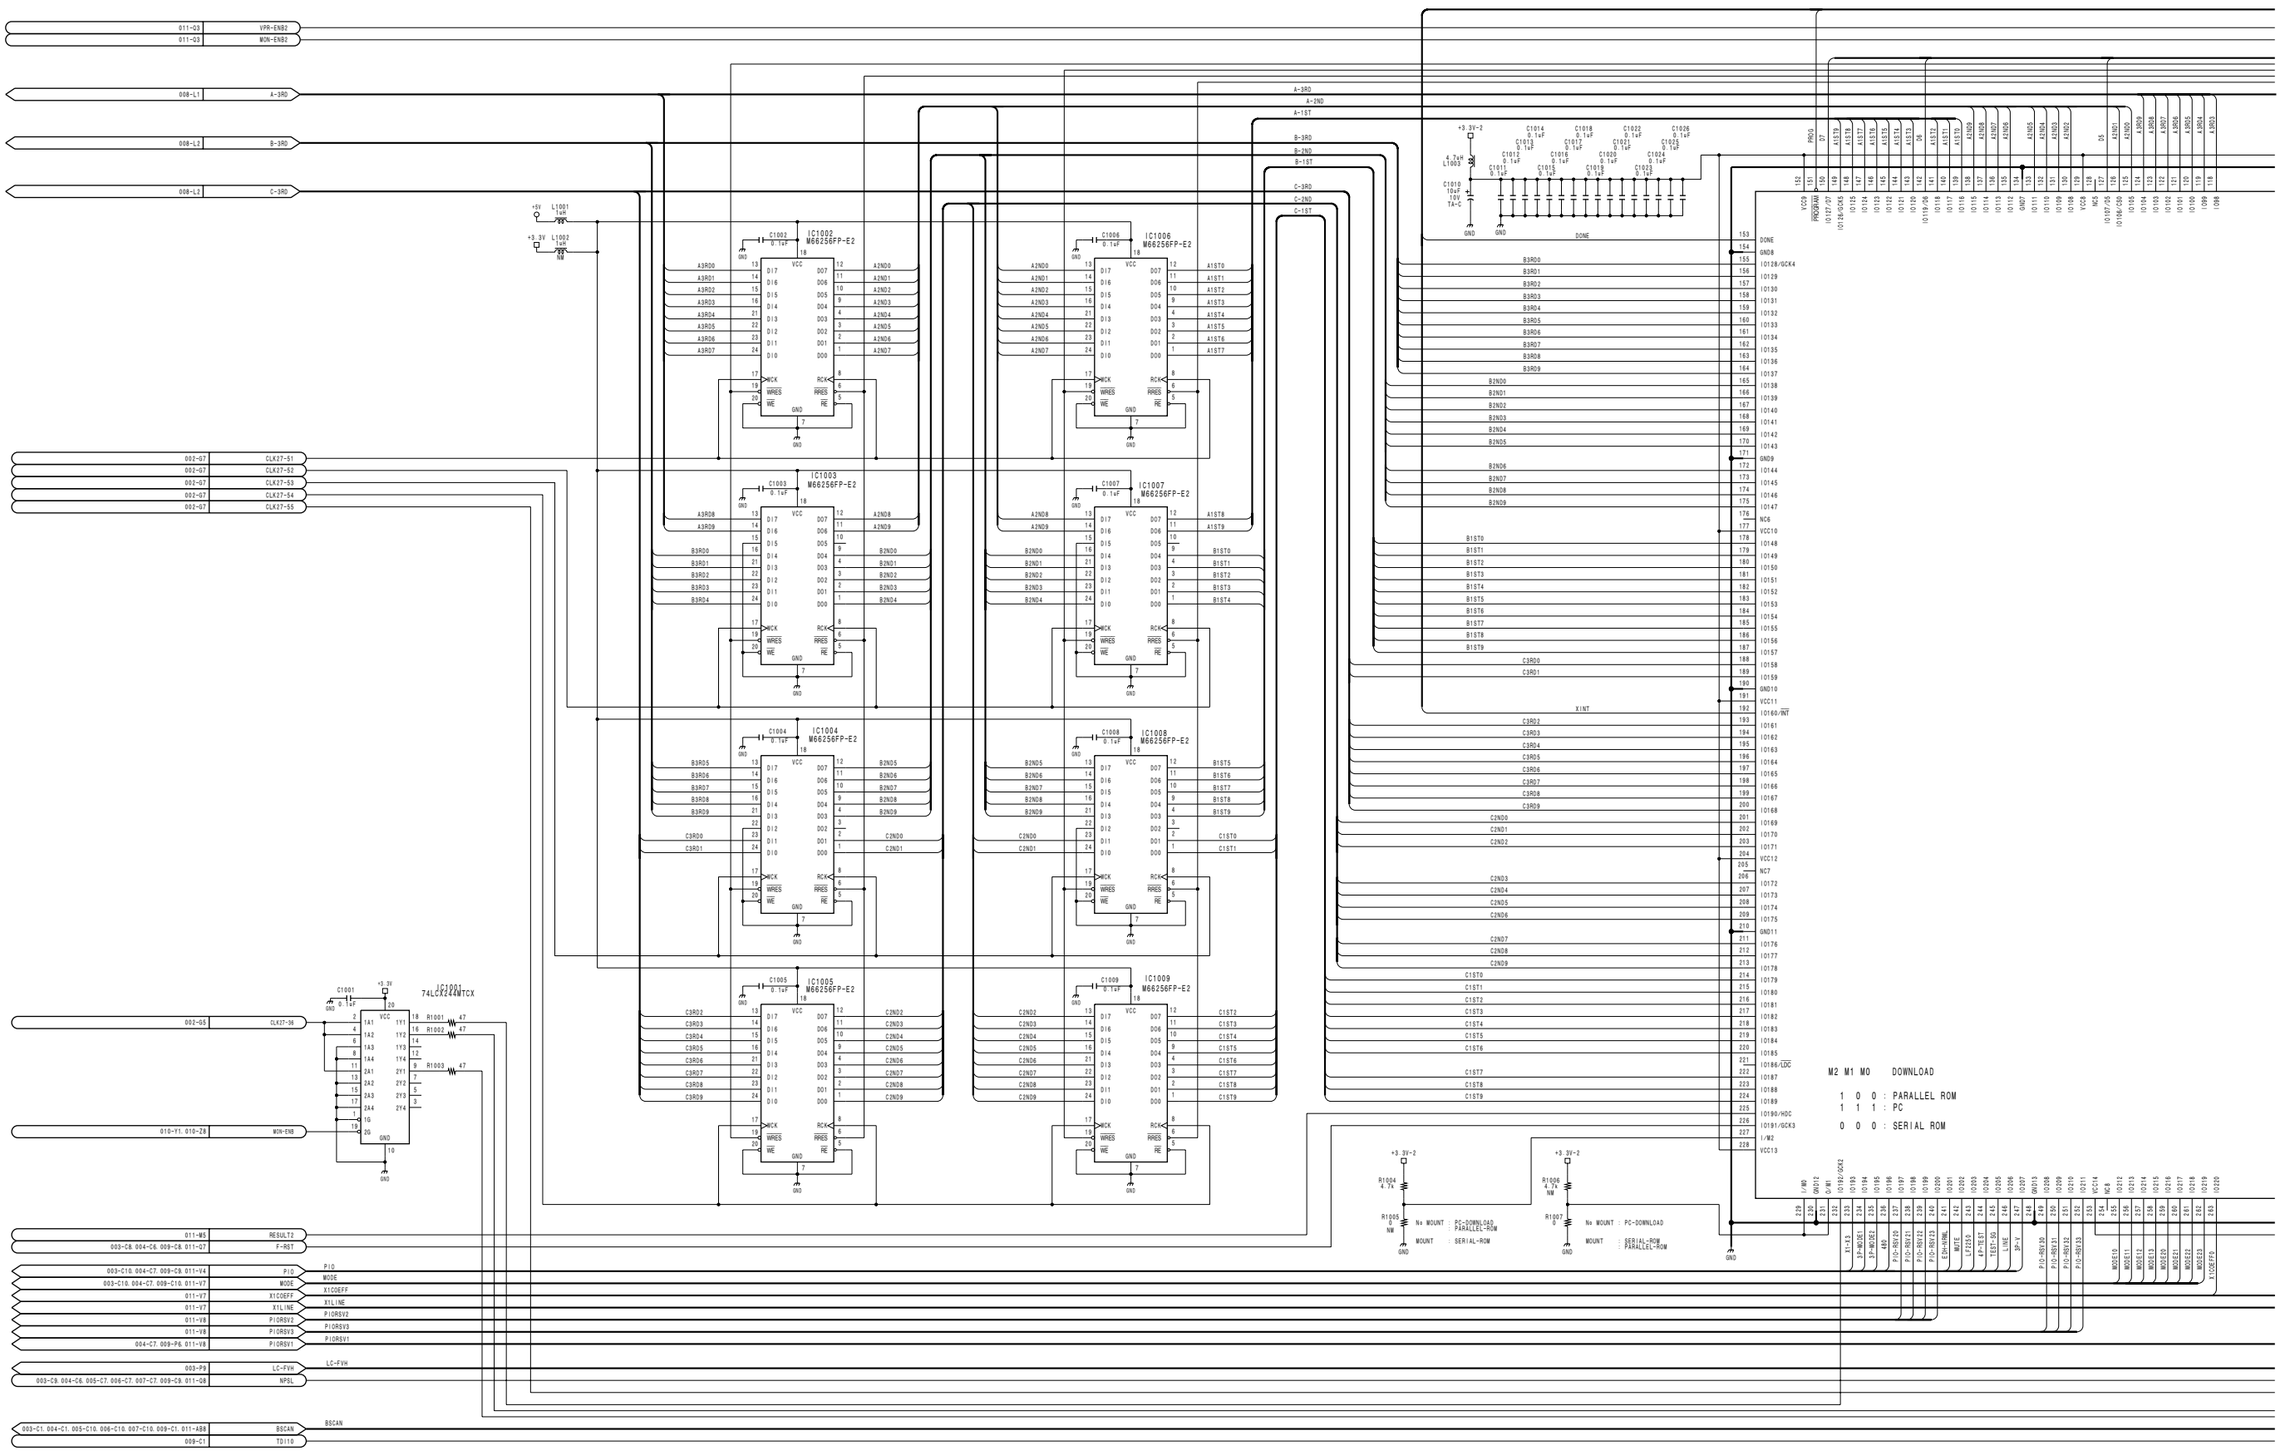

FPGA4

IC1010
XC4044XLA-09HQ304C

LINE-CONVERT FPGA

Serial No. 10018 through 10057

Serial No. 10058 and higher

FPGA DEBUG CN (N.M.)

NORMAL-OUT (To DPR)

MONITOR-OUT (To DIF)

F-DLOAD	003-C10, 004-C7, 009-C10, 011-AB1, 011-W7
MON-ENB	010-C8, 010-Z8
VPR-ENB	002-C5, 009-C10, 010-Z5
LMEM-ENB	002-C7

DOUT1	009-C10
TDO	011-Y8
F-RSV3	003-P5
F-RSV2	004-L1
F-RSV1	003-P6

VCC	1
GND	2
CCLK	3
DONE	4
DIN	5
XPROG	6
XINIT	7

002-C5, 009-C10, 010-Y1 — VPR-ENB

010-C8, 010-Y1 — MON-ENB

VPR-57 (10/12)
BOARD NO. 1-677-773-11, 12
BKP-9330_VPR-57_011A_10

BKP-9330 (SY) : S/N 10001 and Higher

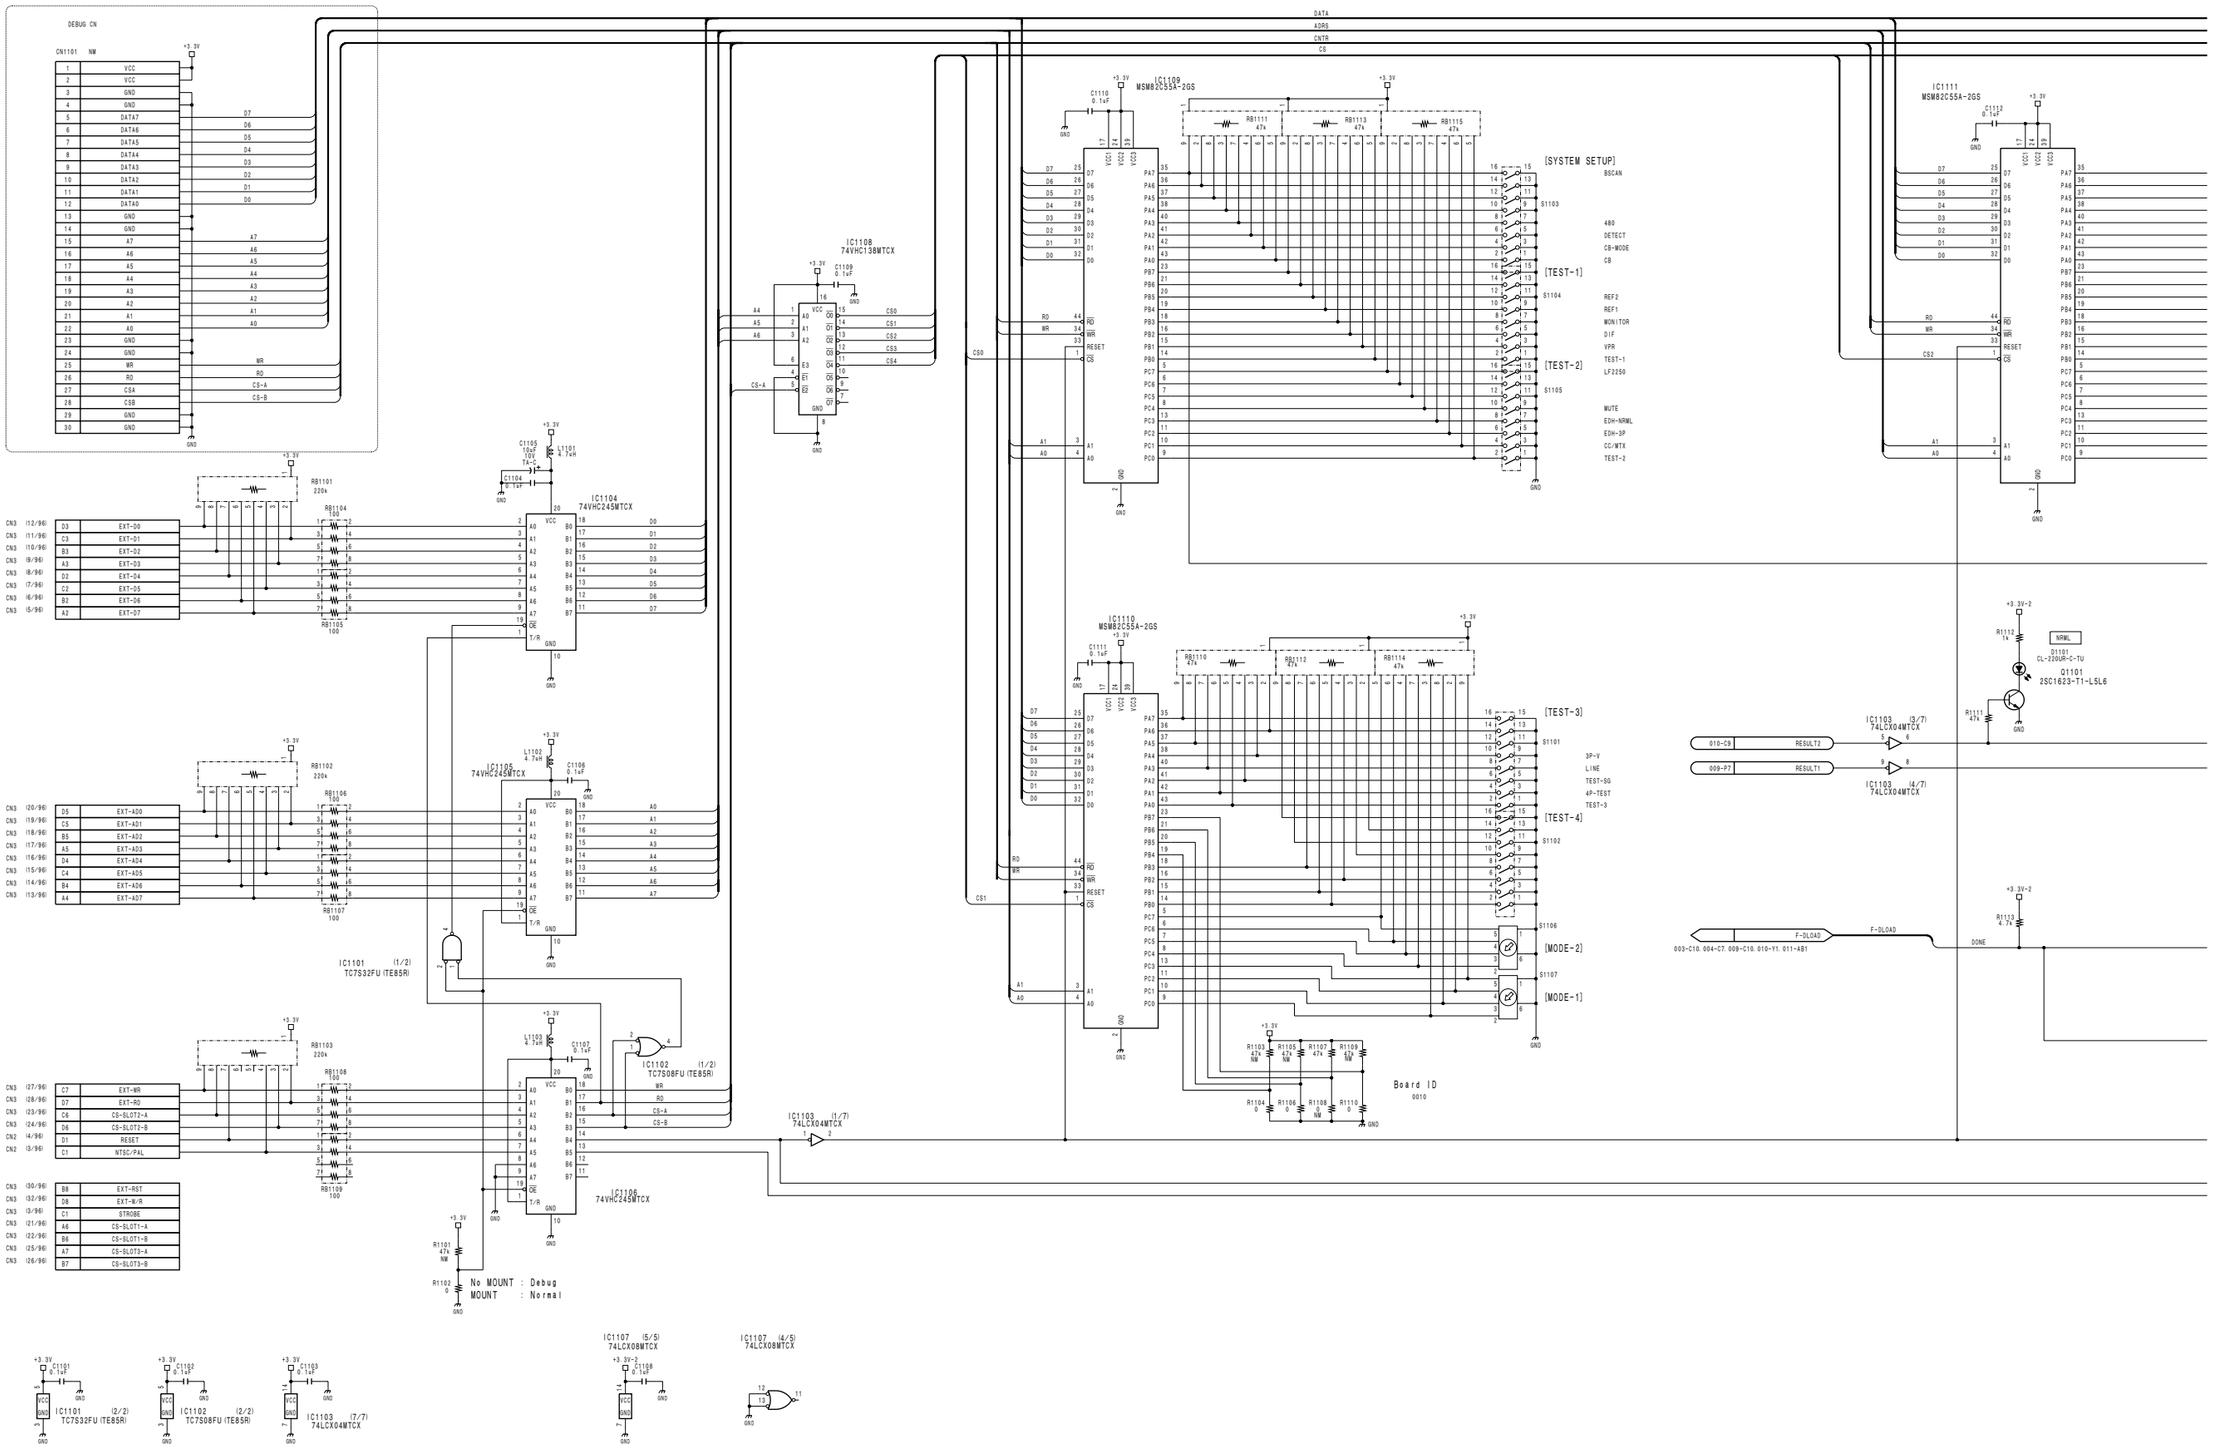

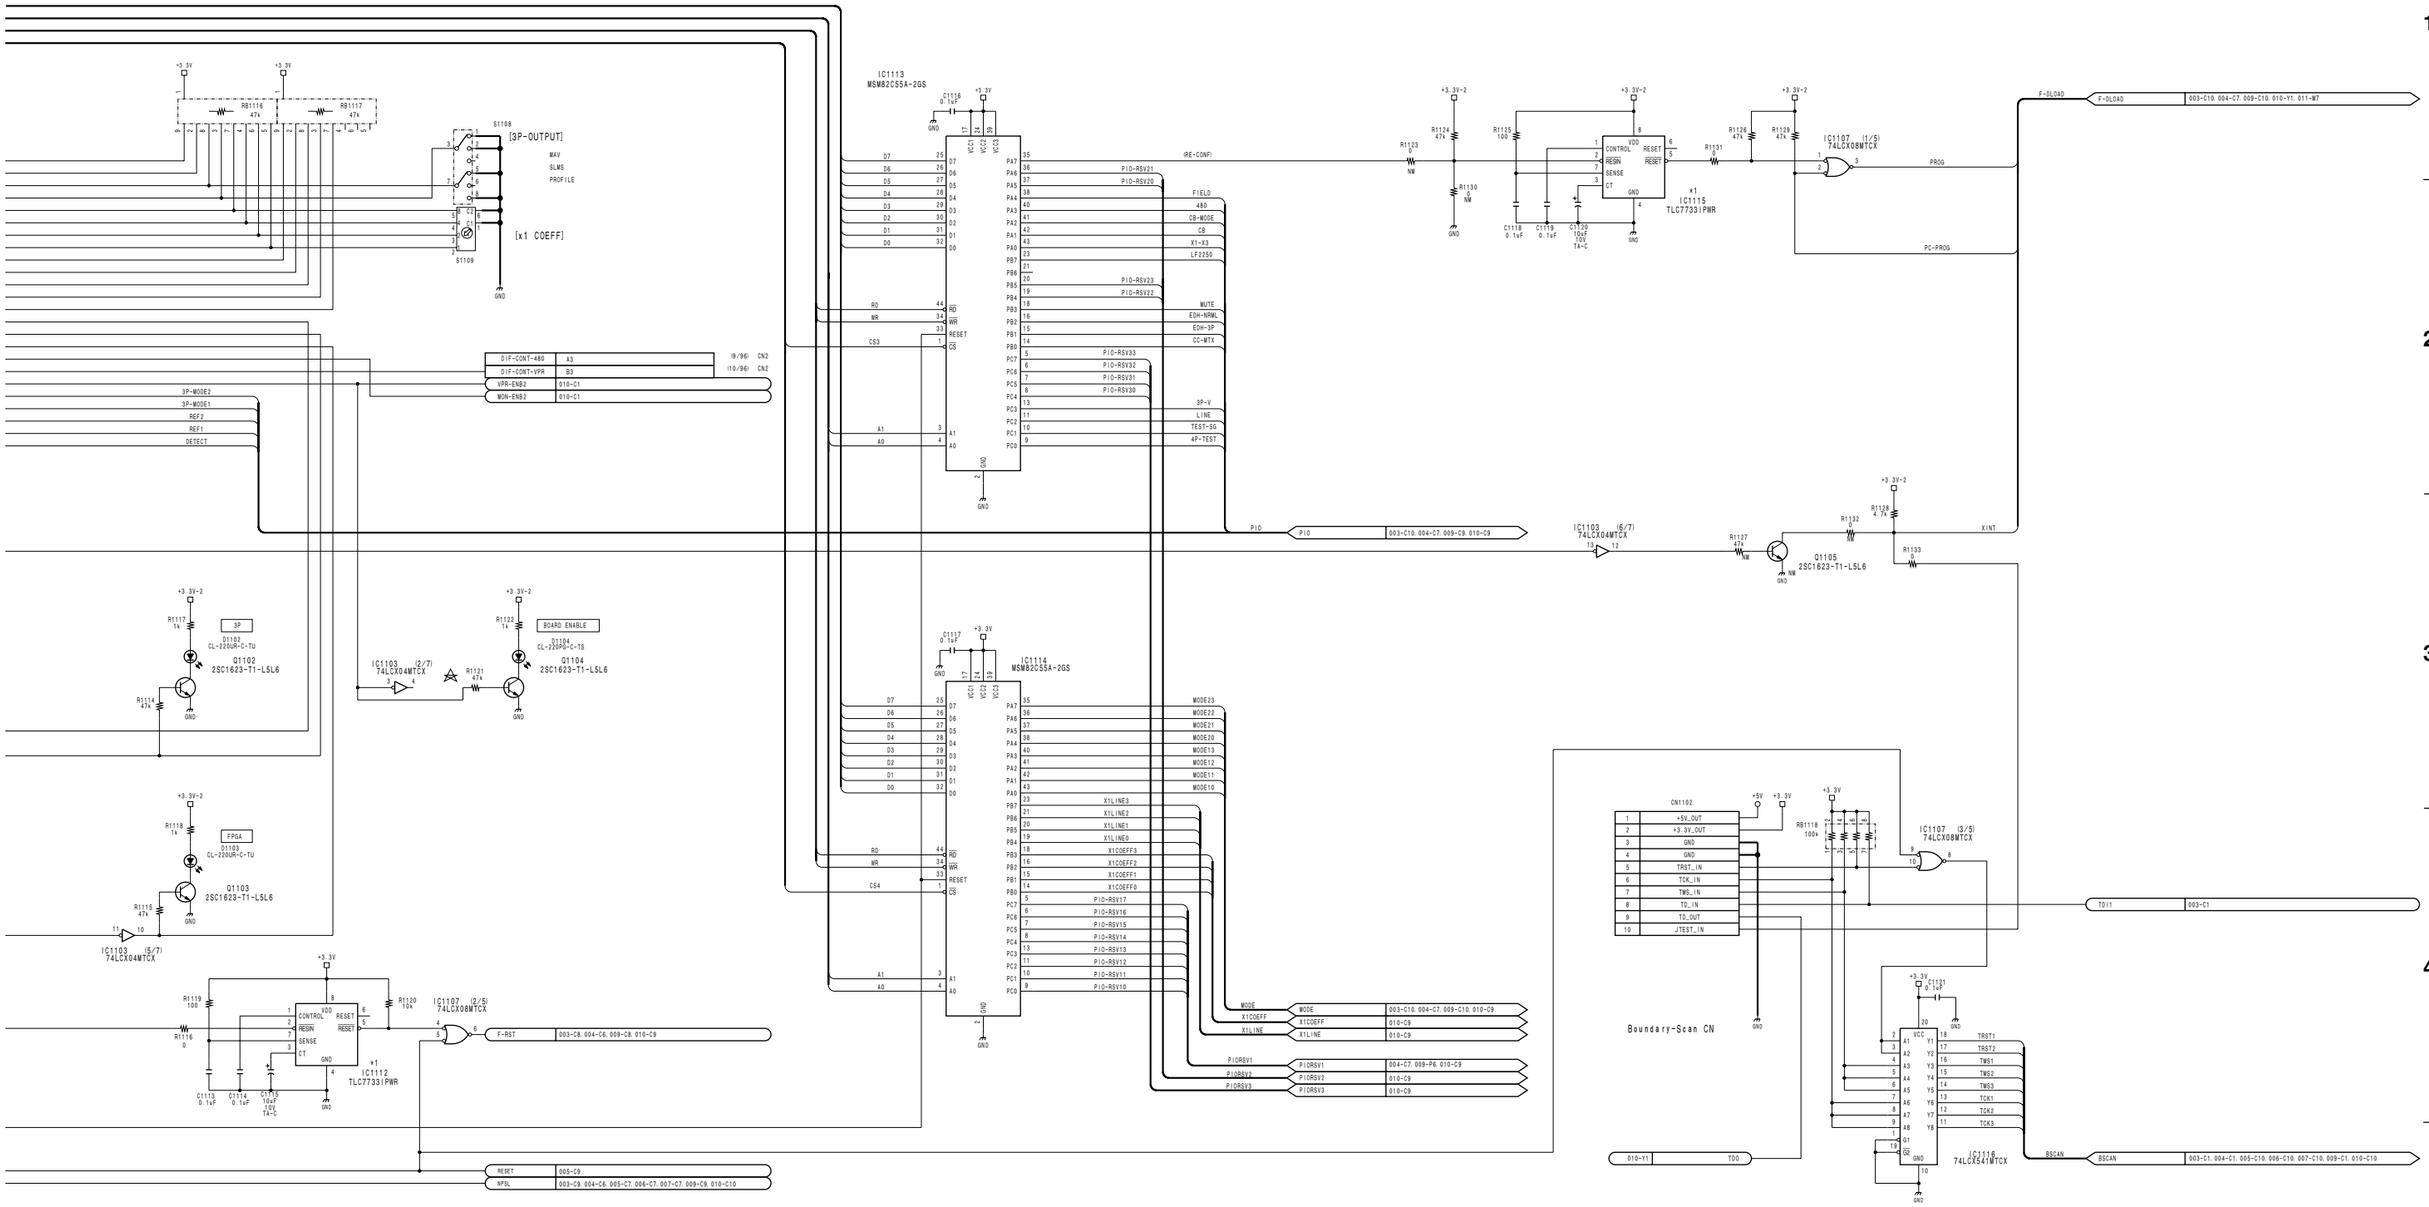

MARK	CHANGED INFORMATION	SERIAL No.
*1	IC1112, IC1115 TLC7733IPWR → TLC7733IPWR-12	10058 and higher

VPR-57 (11/12)
BOARD NO. 1-677-773-11, 12
BKP-9330_VPR-57_011A_11

BKP-9330 (SY) : S/N 10001 and Higher

CN1	(17/96)	A5	N.C
CN1	(18/96)	B5	N.C
CN1	(19/96)	C5	N.C
CN1	(20/96)	D5	N.C
CN1	(21/96)	A6	N.C
CN1	(22/96)	B6	N.C
CN1	(23/96)	C6	N.C
CN1	(24/96)	D6	N.C
CN1	(57/96)	A15	N.C
CN1	(58/96)	B15	N.C
CN1	(59/96)	C15	N.C
CN1	(60/96)	D15	N.C
CN1	(61/96)	A16	(GND)
CN1	(62/96)	B16	(GND)
CN1	(63/96)	C16	(GND)
CN1	(64/96)	D16	(GND)
CN1	(65/96)	A17	HD2-Y0
CN1	(66/96)	B17	HD2-Y1
CN1	(67/96)	C17	74M-CLK-G
CN1	(68/96)	D17	74M-CLK-X
CN1	(69/96)	A18	HD2-Y2
CN1	(70/96)	B18	HD2-Y3
CN1	(71/96)	C18	HD2-Y4
CN1	(72/96)	D18	(GND)
CN1	(73/96)	A19	HD2-Y5
CN1	(74/96)	B19	HD2-Y6
CN1	(75/96)	C19	HD2-Y7
CN1	(76/96)	D19	HD2-Y8
CN1	(77/96)	A20	HD2-Y9
CN1	(78/96)	B20	HD2-CO
CN1	(79/96)	C20	HD2-C1
CN1	(80/96)	D20	HD2-C2
CN1	(81/96)	A21	HD2-C3
CN1	(82/96)	B21	HD2-C4
CN1	(83/96)	C21	HD2-C5
CN1	(84/96)	D21	HD2-C6
CN1	(85/96)	A22	HD2-C7
CN1	(86/96)	B22	HD2-C8
CN1	(87/96)	C22	HD2-C9
CN1	(88/96)	D22	(GND)
CN1	(89/96)	A23	GATE1
CN1	(90/96)	B23	GATE2
CN1	(91/96)	C23	GATE3
CN1	(92/96)	D23	(---)
CN1	(93/96)	A24	GATE1
CN1	(94/96)	B24	GATE2
CN1	(95/96)	C24	GATE3
CN1	(96/96)	D24	(---)

CN2	(1/96)	A1	SYSTEM-V
CN2	(2/96)	B1	V-RESET
CN2	(5/96)	A2	SYSTEM-H
CN2	(6/96)	B2	GND
CN2	(7/96)	C2	SYSTEM-F
CN2	(8/96)	D2	GND
CN2	(11/96)	C3	27M-CLK-VPR-G
CN2	(12/96)	D3	27M-CLK-VPR-X
CN2	(13/96)	A4	(27M-CLK-480-X)
CN2	(14/96)	B4	(27M-CLK-480-G)
CN2	(15/96)	C4	13.5M-CLK-X
CN2	(16/96)	D4	13.5M-CLK-G
CN2	(17/96)	A5	GND
CN2	(18/96)	B5	HD1-Y0
CN2	(19/96)	C5	GND
CN2	(20/96)	D5	HD1-Y1
CN2	(21/96)	A6	HD1-Y2
CN2	(22/96)	B6	HD1-Y3
CN2	(23/96)	C6	HD1-Y4
CN2	(24/96)	D6	HD1-Y5
CN2	(25/96)	A7	HD1-Y6
CN2	(26/96)	B7	HD1-Y7
CN2	(27/96)	C7	HD1-Y8
CN2	(28/96)	D7	HD1-Y9
CN2	(29/96)	A8	HD1-C0
CN2	(30/96)	B8	HD1-C1
CN2	(31/96)	C8	HD1-C2
CN2	(32/96)	D8	HD1-C3
CN2	(33/96)	A9	HD1-C4
CN2	(34/96)	B9	HD1-C5
CN2	(35/96)	C9	HD1-C6
CN2	(36/96)	D9	HD1-C7
CN2	(37/96)	A10	GND
CN2	(38/96)	B10	HD1-C8
CN2	(39/96)	C10	GND
CN2	(40/96)	D10	HD1-C9
CN2	(41/96)	A11	27M-CLK-MEM-X
CN2	(42/96)	B11	27M-CLK-MEM-G
CN2	(43/96)	C11	74M-CLK-HD1-X
CN2	(44/96)	D11	74M-CLK-HD1-G
CN2	(45/96)	A12	GND
CN2	(47/96)	C12	GND
CN2	(65/96)	A17	GND
CN2	(67/96)	C17	GND
CN2	(73/96)	A19	GND
CN2	(75/96)	C19	GND
CN2	(95/96)	C24	GND
CN2	(96/96)	D24	GND

GND

CN3	(1/96)	A1	GND
CN3	(2/96)	B1	GND
CN3	(4/96)	D1	(CPU-spare)
CN3	(29/96)	A8	GND
CN3	(31/96)	C8	GND
CN3	(33/96)	A9	27M-CLK-RETAB-X
CN3	(34/96)	B9	27M-CLK-RETAB-G
CN3	(35/96)	C9	RET-SEL0
CN3	(36/96)	D9	RET-SEL1
CN3	(37/96)	A10	GND
CN3	(38/96)	B10	RETB-0
CN3	(39/96)	C10	GND
CN3	(40/96)	D10	RETB-1
CN3	(41/96)	A11	RETB-2
CN3	(42/96)	B11	RETB-3
CN3	(43/96)	C11	RETB-4
CN3	(44/96)	D11	RETB-5
CN3	(45/96)	A12	RETB-6
CN3	(46/96)	B12	RETB-7
CN3	(47/96)	C12	RETB-8
CN3	(48/96)	D12	RETB-9
CN3	(49/96)	A13	RETA-0
CN3	(50/96)	B13	RETA-1
CN3	(51/96)	C13	RETA-2
CN3	(52/96)	D13	RETA-3
CN3	(53/96)	A14	RETA-4
CN3	(54/96)	B14	RETA-5
CN3	(55/96)	C14	RETA-6
CN3	(56/96)	D14	RETA-7
CN3	(57/96)	A15	GND
CN3	(58/96)	B15	RETA-8
CN3	(59/96)	C15	GND
CN3	(60/96)	D15	RETA-9
CN3	(61/96)	A16	(spare5)
CN3	(62/96)	B16	(spare6)
CN3	(63/96)	C16	27M-CLK-RET1-SEL-X
CN3	(64/96)	D16	27M-CLK-RET1-SEL-G
CN3	(65/96)	A17	GND
CN3	(66/96)	B17	RET1-0
CN3	(67/96)	C17	GND
CN3	(68/96)	D17	RET1-1
CN3	(69/96)	A18	RET1-2
CN3	(70/96)	B18	RET1-3
CN3	(71/96)	C18	RET1-4
CN3	(72/96)	D18	RET1-5
CN3	(73/96)	A19	RET1-6
CN3	(74/96)	B19	RET1-7
CN3	(75/96)	C19	RET1-8
CN3	(76/96)	D19	RET1-9
CN3	(77/96)	A20	GND
CN3	(78/96)	B20	(SPARE7)
CN3	(79/96)	C20	GND
CN3	(87/96)	C22	GND

GND

CN4	(21/96)	A6	GND
CN4	(22/96)	B6	GND
CN4	(23/96)	C6	GND
CN4	(24/96)	D6	GND
CN4	(25/96)	A7	GND
CN4	(26/96)	B7	GND
CN4	(27/96)	C7	GND
CN4	(28/96)	D7	GND
CN4	(29/96)	A8	N.C
CN4	(30/96)	B8	N.C
CN4	(31/96)	C8	N.C
CN4	(32/96)	D8	N.C
CN4	(33/96)	A9	-12.5V
CN4	(34/96)	B9	-12.5V
CN4	(35/96)	C9	-12.5V
CN4	(36/96)	D9	-12.5V
CN4	(37/96)	A10	+12.5V
CN4	(38/96)	B10	+12.5V
CN4	(39/96)	C10	+12.5V
CN4	(40/96)	D10	+12.5V
CN4	(41/96)	A11	GND
CN4	(42/96)	B11	GND
CN4	(43/96)	C11	GND
CN4	(44/96)	D11	GND
CN4	(45/96)	A12	GND
CN4	(46/96)	B12	GND
CN4	(47/96)	C12	GND
CN4	(48/96)	D12	GND
CN4	(49/96)	A13	27M-CLK-SMN-X
CN4	(50/96)	B13	27M-CLK-SMN-G
CN4	(53/96)	A14	GND
CN4	(66/96)	B17	COM-A-1
CN4	(67/96)	C17	COM-A-2
CN4	(68/96)	D17	COM-A-3
CN4	(69/96)	A18	COM-B-0
CN4	(70/96)	B18	COM-B-1
CN4	(71/96)	C18	COM-B-2
CN4	(72/96)	D18	COM-B-3
CN4	(73/96)	A19	COM-B-4
CN4	(74/96)	B19	COM-B-5
CN4	(75/96)	C19	COM-B-6
CN4	(76/96)	D19	COM-B-7
CN4	(77/96)	A20	COM-B-8
CN4	(78/96)	B20	COM-B-9
CN4	(79/96)	C20	COM-B-10
CN4	(80/96)	D20	COM-B-11
CN4	(81/96)	A21	PNL-TX
CN4	(82/96)	B21	PNL-RX
CN4	(83/96)	C21	SPM-TX
CN4	(84/96)	D21	SPM-RX
CN4	(85/96)	A22	VTR-TX
CN4	(86/96)	B22	VTR-RX
CN4	(87/96)	C22	COM-C-1
CN4	(88/96)	D22	COM-C-2
CN4	(89/96)	A23	COM-C-3
CN4	(90/96)	B23	COM-C-4
CN4	(91/96)	C23	SLOT SENCE 2
CN4	(92/96)	D23	SLOT SENCE 3
CN4	(93/96)	A24	GND
CN4	(94/96)	B24	GND
CN4	(95/96)	C24	GND
CN4	(96/96)	D24	GND

R1201 0

R1202 0

GND

GND

VPR-57 (12/12)

BOARD NO. 1-677-773-11, 12

BKP-9330_VPR-57_011A_12

Section 5
Board Layouts

Index

Board Name	Function	Page
AT-122 (CCU-900/900P)	Sytem Control, Audio Process	5-10
CN-1617 (CCU-900/900P)	Connector	5-16
CN-1618 (CCU-900/900P)	Connector	5-17
CN-1619 (CCU-900/900P)	Connector	5-17
CN-1635 (CCU-900/900P)	Connector	5-17
CN-1636 (CCU-900/900P)	Connector	5-17
CN-1637 (CCU-900/900P)	Connector	5-17
CN-1638 (CCU-900/900P)	Connector	5-17
CN-1925 (CCU-900/900P)	Connector	5-17
DIF-38 (BKP-9330)	Super Motion Output	5-18
DPR-69 (CCU-900/900P)	SG, Video Process	5-2
IF-730 (CCU-900/900P)	Interface	5-8
MB-647 (CCU-900/900P)	Motherboard	5-14
SDI-31 (CCU-900/900P)	Digital Interface	5-6
VPR-57 (BKP-9330)	Super Motion Video Process	5-20

5-1

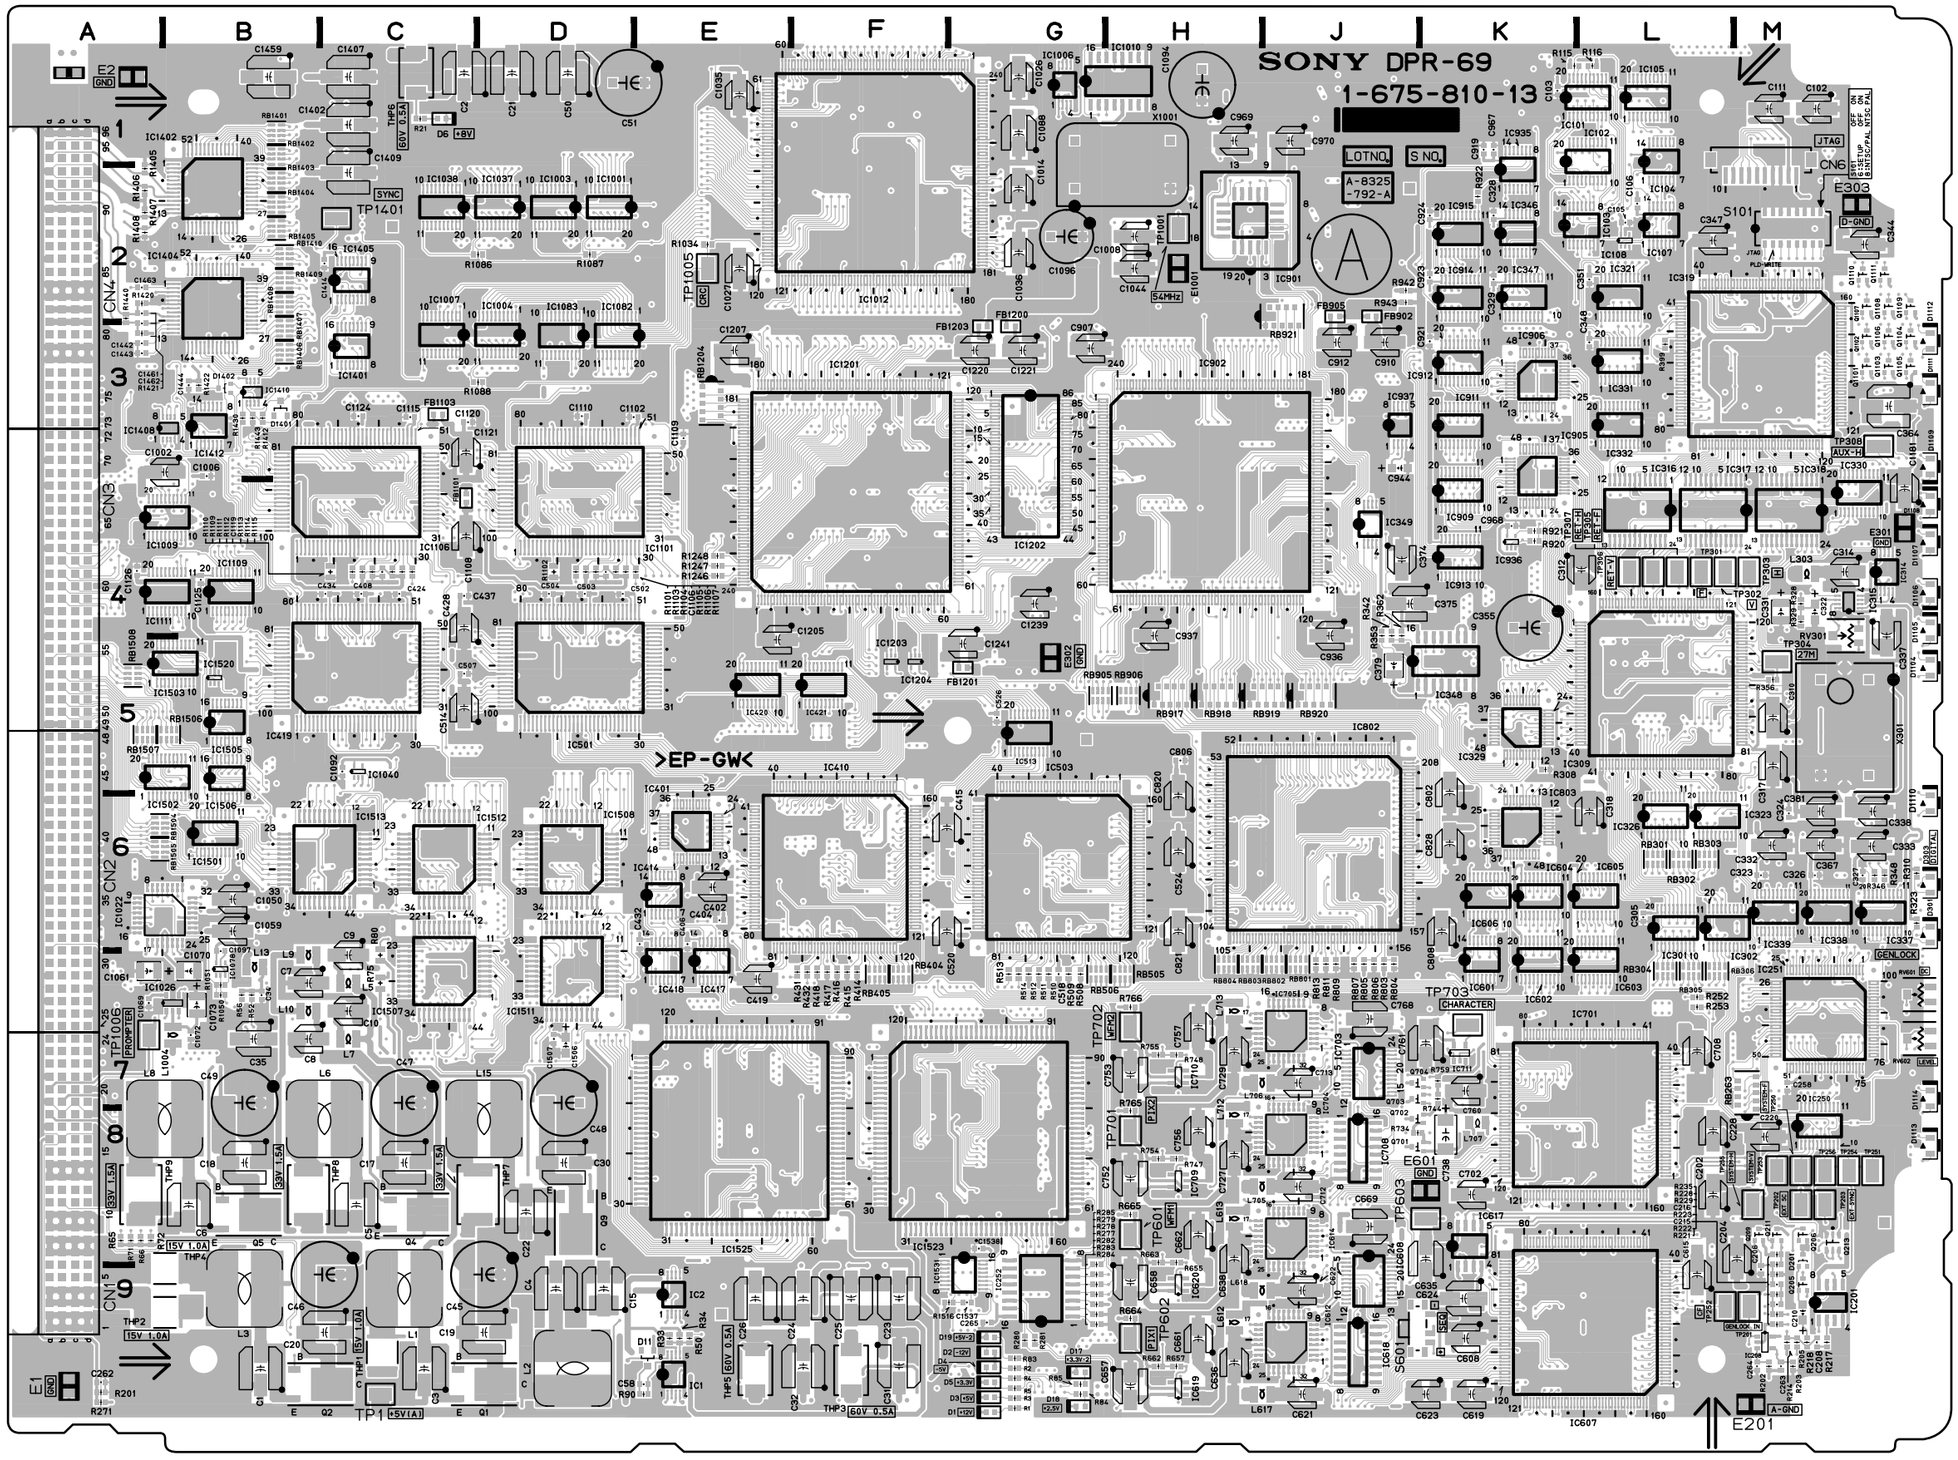

CCU-900 (UC) : S/N 10022 and Higher
CCU-900 (J) : S/N 30004 and Higher
CCU-900P (CE) : S/N 40045 and Higher

DPR-69 -A SIDE-
SUFFIX: -13

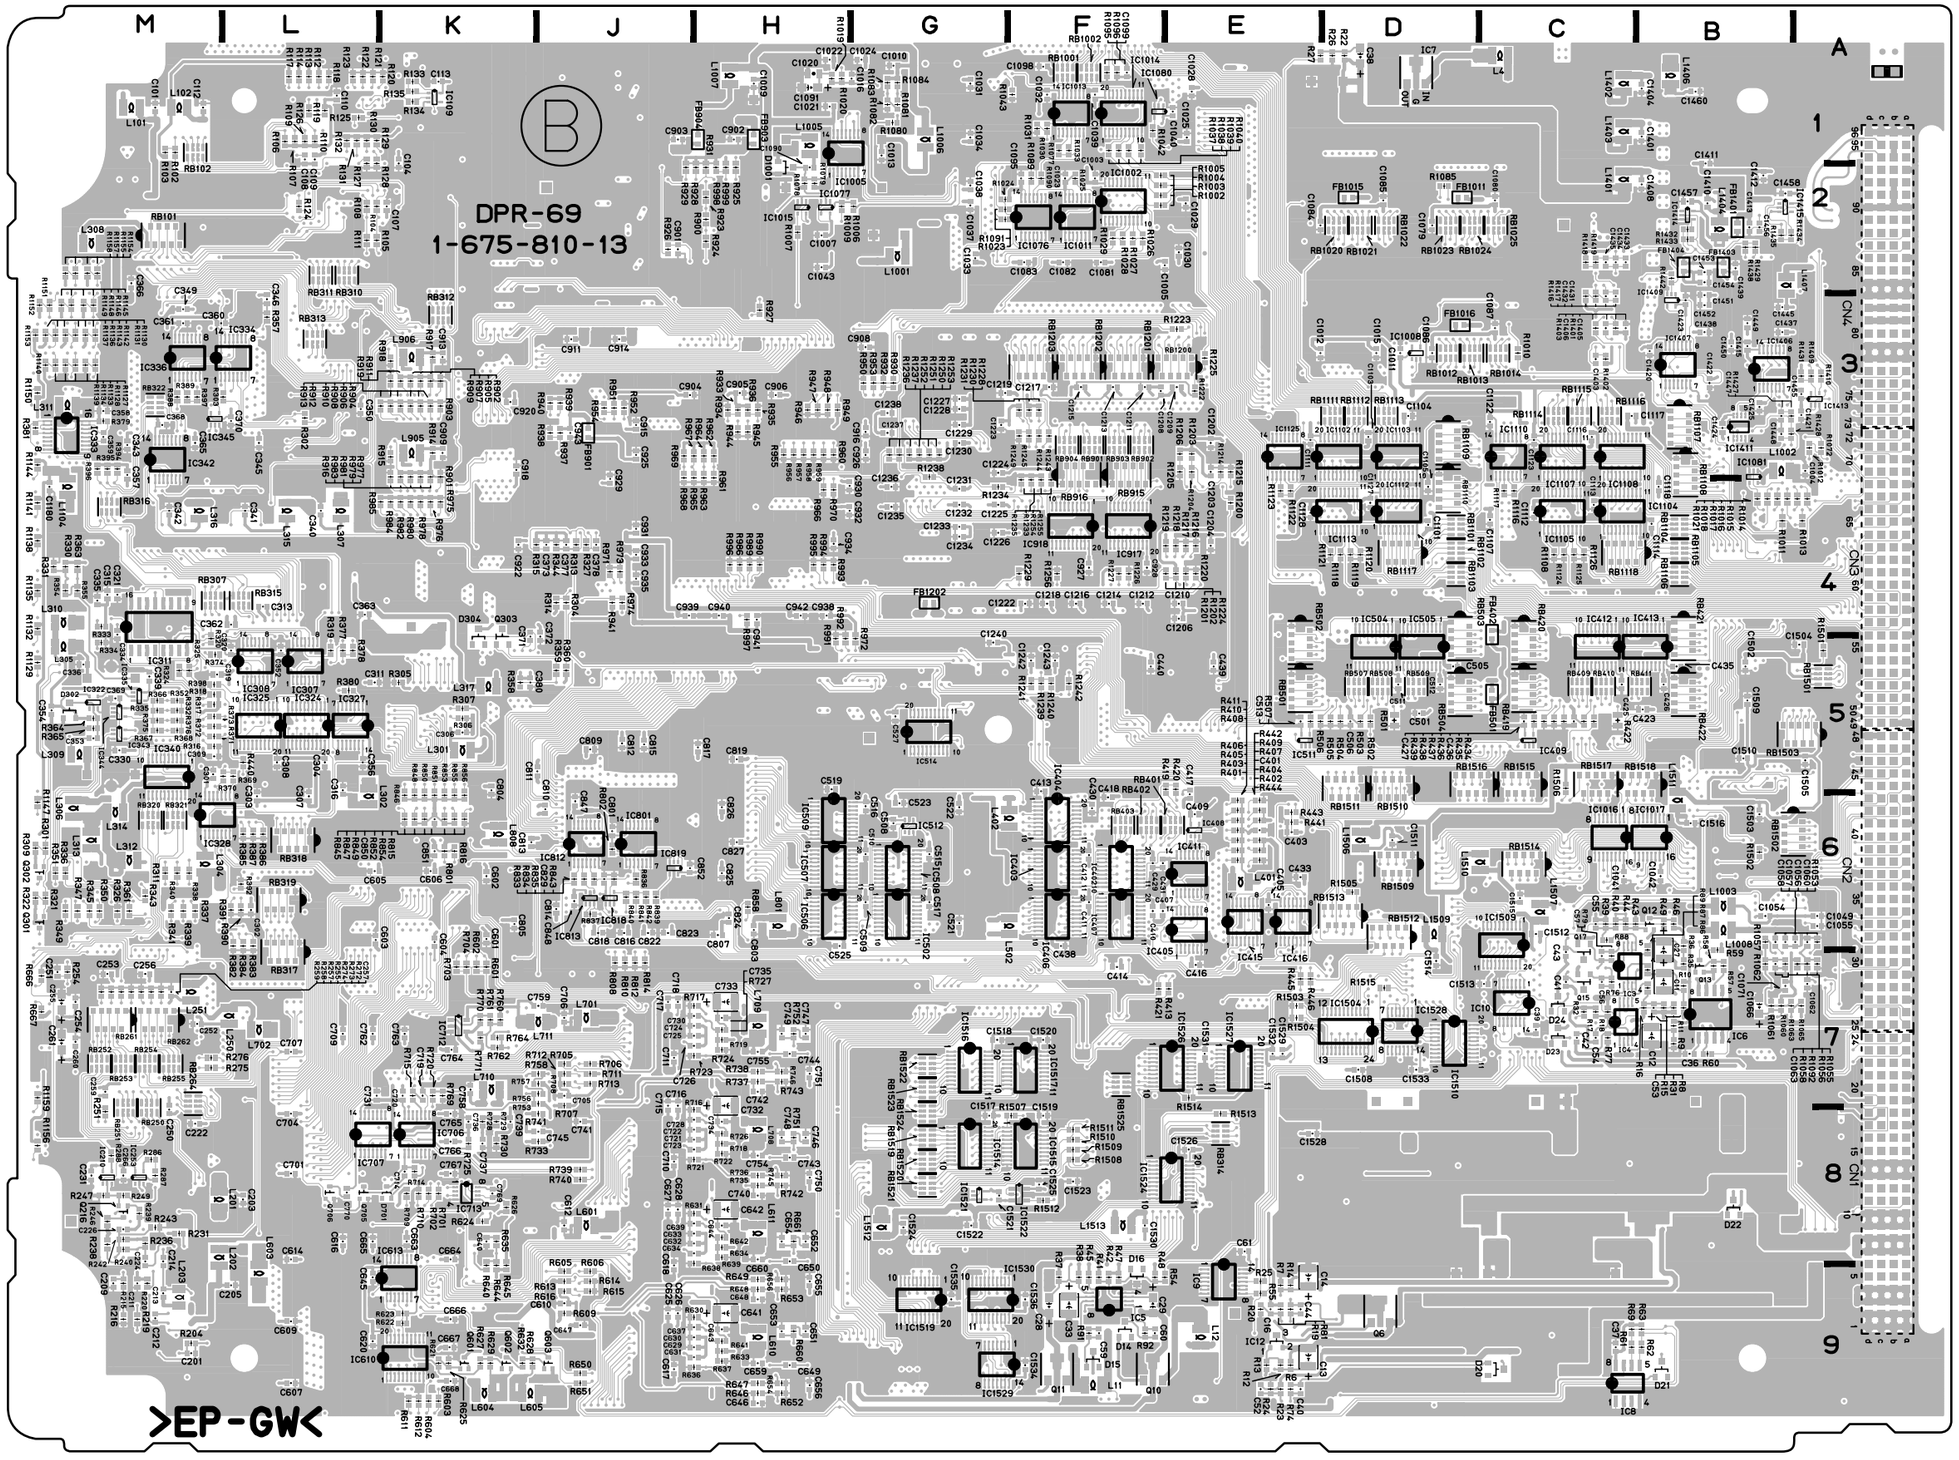

Components location list ; next page

DPR-69 -B SIDE-
SUFFIX: -13

DPR-69 (1-675-810-13)
---

*:B SIDE

C1	B9	C222	*M8	C370	*L3	C618	*J9	C740	*H8	C927	*F4	C1090	*H2	C1410	*B2	D11	E9	IC307	*L5	IC704	J8	IC1413	*A3	L708	*H8	R16	*B7	R127	*L1	R329	M4
C2	C1	C224	*M8	C371	*K5	C619	K9	C741	*J8	C928	*F4	C1091	*H1	C1411	*B1	D14	*F9	IC308	*L5	IC705	J7	IC1414	*B2	L709	*H7	R17	*C7	R128	*L1	R330	*M4
C3	C9	C226	*M8	C372	*J5	C620	*L9	C742	*H7	C929	*J4	C1092	C5	C1412	*B2	D15	*F9	IC309	L5	IC706	*K8	IC1415	*B2	L710	*K7	R18	*C7	R129	*L1	R331	*M4
C4	D9	C228	L8	C373	*J4	C621	J9	C743	*H8	C930	*H4	C1094	H1	C1413	*B2	D16	*F9	IC311	*M5	IC707	*L8	IC1501	B6	L711	*J7	R19	*E9	R130	*L1	R332	*M5
C5	C8	C231	*M8	C374	J4	C622	J9	C744	*H7	C931	*J4	C1095	*F2	C1414	C2	D17	G9	IC314	M4	IC708	J8	IC1502	A6	L712	H8	R20	*E9	R131	*L1	R333	*M4
C6	B8	C250	*M8	C375	J4	C623	K9	C745	*J8	C932	*H4	C1096	G2	C1415	*B3	D18	G9	IC315	M4	IC709	H8	IC1503	A5	L713	H7	R21	C1	R132	*L1	R334	*M5
C7	B7	C251	*M7	C377	*J4	C624	K9	C746	*H8	C933	*J4	C1097	B7	C1420	*B3	D19	G9	IC316	L4	IC710	H7	IC1504	*D7	L801	*H6	R22	*D1	R133	*K1	R335	*M5
C8	B7	C252	*M7	C378	*J4	C625	*J9	C747	*H7	C934	*H4	C1098	*F1	C1421	*A3	D20	*C9	IC317	M4	IC711	K7	IC1505	B5	L808	*K6	R23	*E9	R134	*K1	R336	*M6
C9	C7	C253	*M7	C379	J5	C626	*J9	C748	*H8	C935	*J4	C1099	*F1	C1422	*B3	D21	*B9	IC318	M4	IC712	*K7	IC1506	B6	L905	*K3	R24	*E9	R135	*K1	R337	*M6
C10	C7	C254	*M7	C380	*K5	C627	*J8	C749	*H7	C936	J4	C1101	*D4	C1423	*B3	D22	*B8	IC319	M3	IC713	*K8	IC1507	C7	L906	*K3	R25	*E9	R201	A9	R338	*M6
C11	*B7	C255	*M7	C381	M6	C628	*J8	C750	*H8	C937	H4	C1102	D3	C1424	*B3	D23	*C7	IC321	L2	IC801	*J6	IC1508	D6	L1001	*G2	R26	*D1	R202	M9	R339	*M6
C12	*B7	C256	*M7	C401	*E6	C629	*H9	C751	*H7	C938	*H4	C1103	*D3	C1425	*B3	D24	*C7	IC322	*M5	IC802	J6	IC1509	*C6	L1002	*B3	R27	*E1	R203	M9	R340	*M6
C13	*E9	C257	*M7	C402	E6	C630	*H9	C752	H8	C939	*J4	C1104	*D3	C1431	*C3	D201	M8	IC323	L6	IC803	K6	IC1510	*D7	L1003	*B6	R31	*B7	R204	*M9	R341	*M6
C14	*E9	C258	M7	C403	*E6	C631	*H9	C753	H7	C940	*H4	C1105	*D4	C1432	*C3	D301	M6	IC324	*L5	IC812	*J6	IC1511	D7	L1004	B7	R32	*C7	R205	M9	R342	J4
C15	D9	C259	*M7	C404	E6	C632	*H8	C754	*H8	C941	*H4	C1106	D4	C1433	*C2	D302	*M5	IC325	*L5	IC813	*J6	IC1512	C6	L1005	*H1	R33	E9	R214	M9	R343	*M6
C16	*E9	C260	*M7	C405	*E6	C633	*H8	C755	*H7	C942	*H4	C1107	*C4	C1434	*C2	D303	M6	IC326	L6	IC818	*J6	IC1513	C6	L1006	*G1	R34	E9	R215	*M9	R344	*J4
C17	C8	C261	*M7	C406	E6	C634	*H8	C756	H8	C943	*J3	C1108	C4	C1435	*C2	D304	*K5	IC327	*L5	IC819	*J6	IC1514	*G8	L1007	*H1	R35	*B7	R216	*M9	R345	*M6
C18	B8	C262	A9	C407	*F6	C635	K8	C757	H7	C944	J3	C1109	E3	C1437	*B3	D701	*K8	IC328	*M6	IC901	H2	IC1515	*G8	L1008	*B6	R36	*B6	R217	M9	R346	M6
C19	D9	C263	M9	C408	C4	C636	H9	C758	*K7	C967	K1	C1110	D3	C1438	*B3	D1001	*H2	IC329	K5	IC902	H4	IC1516	*G7	L1104	*M4	R37	*F9	R218	M9	R347	*M6
C20	C9	C264	M9	C409	*E6	C637	*H9	C759	*J7	C968	K4	C1111	*E3	C1439	*B2	D1104	M5	IC330	M4	IC905	K3	IC1517	*G7	L1401	*C2	R38	*F9	R219	*M9	R348	M6
C21	D1	C265	G9	C410	*F6	C638	H8	C760	K7	C969	H1	C1112	*C4	C1442	A3	D1105	M4	IC331	L3	IC906	K3	IC1519	*G9	L1402	*C1	R39	*C6	R220	*M9	R349	*M6
C22	D8	C266	*M8	C411	*F6	C639	*H8	C761	K7	C970	J1	C1113	*C4	C1443	A3	D1106	M4	IC332	L3	IC909	K4	IC1520	B5	L1403	*C1	R40	*C6	R221	M9	R350	*M6
C23	F9	C301	*M5	C412	*F6	C640	*K8	C762	*L7	C1002	B3	C1114	*B4	C1444	B3	D1107	M4	IC333	*M3	IC911	K3	IC1521	*G8	L1404	*B2	R41	*F9	R222	M9	R351	*M6
C24	F9	C302	*L6	C413	*F5	C641	*H9	C763	*K7	C1003	*F2	C1115	C3	C1445	*B3	D1108	M4	IC334	*M3	IC912	K3	IC1522	*F8	L1406	*B1	R42	*F9	R223	M9	R352	*M5
C25	F9	C303	*L6	C414	*F7	C642	*H8	C764	*K7	C1004	*A3	C1116	*C3	C1447	*B3	D1109	M3	IC335	*M5	IC913	K4	IC1523	G8	L1407	*B2	R43	*C6	R228	M8	R353	J4
C26	E9	C304	*L5	C415	F6	C643	*H9	C765	*K8	C1005	*F2	C1117	*C3	C1448	*B3	D1110	M6	IC336	*M3	IC914	K2	IC1524	*F8	L1506	*D6	R44	*C6	R229	M9	R354	*M4
C27	*B7	C305	L6	C416	*E7	C644	*H8	C766	*K8	C1006	B3	C1118	*B4	C1449	*B3	D1111	M3	IC337	M6	IC915	K2	IC1525	E8	L1507	*C6	R45	*F9	R231	*M8	R355	*M4
C28	*F9	C306	*K5	C417	*E6	C645	*L9	C767	*K8	C1007	*H2	C1119	C4	C1450	*B3	D1112	M3	IC338	M6	IC917	*F4	IC1526	*F7	L1509	*D6	R46	*B6	R235	M8	R356	M5
C29	*F9	C307	*L6	C418	*F6	C646	*H9	C768	J7	C1008	H2	C1120	C3	C1451	*B3	D1113	M8	IC339	M6	IC918	*F4	IC1527	*E7	L1510	*C6	R47	*F9	R236	*M8	R357	*L3
C30	D8	C308	*L5	C419	E7	C647	*J9	C769	*K8	C1009	*H1	C1121	C3	C1452	*B3	D1114	M7	IC340	*M5	IC935	K2	IC1528	*D7	L1511	*B6	R48	*F9	R238	*M8	R358	*K5
C31	F9	C309	*M5	C423	*B5	C648	*H9	C770	*L8	C1010	*G1	C1122	*C3	C1453	*B2	D1401	B3	IC342	*M4	IC936	K4	IC1529	*F9	L1512	*G8	R49	*B6	R239	*M8	R359	*J5
C32	F9	C310	M5	C424	C4	C649	*H9	C801	*J6	C1011	*D3	C1123	*C3	C1454	*B2	D1402	B3	IC343	*M5	IC937	J3	IC1530	*F9	L1513	*F8	R50	E9	R240	*M8	R360	*J5
C33	*F9	C311	*L5	C425	*C5	C650	*H8	C802	K5	C1012	*E3	C1124	C3	C1455	*A3			IC344	*M5	IC1001	D2	IC1531	F8			R52	B7	R242	*M8	R361	*M6
C34	B7	C312	L4	C426	*B5	C651	*H9	C803	*H6	C1013	*G1	C1125	B4	C1456	*B2	E1	A9	IC345	*M3	IC1002	*F2			Q1	D9	R54	*F9	R243	*M8	R362	J4
C35	B7	C313	*L4	C427	*C5	C652	*H8	C804	*K5	C1014	G2	C1126	A4	C1457	*B2	E2	A1	IC346	K2	IC1003	D2	L1	C9	Q2	C9	R55	*E9	R246	*M8	R363	*M4
C36	*B7	C314	M4	C428	C4	C653	*H9	C805	*K6	C1015	*D3	C1127	*D4	C1458	*B2	E201	M9	IC347	K2	IC1004	D2	L2	D9	Q4	C8	R56	B7	R247	*M8	R364	*M5
C37	*C9	C315	*M4	C429	*F6	C654	*H8	C806	H5	C1016	*G1	C1128	*E4	C1459	B1	E301	M4	IC348	J5	IC1005	*H2	L3	B9	Q5	B8	R57	*B7	R249	*M8	R365	*M5
C38	*D1	C316	*L5	C430	*F6	C655	*H9	C807	*H6	C1020	*H1	C1180	*M4	C1460	*B1	E302	G5	IC349	J4	IC1006	G1	L4	*C1	Q6	*D9	R58	*B7	R251	*M8	R366	*M5
C39	*C7	C317	M5	C431	*F6	C656	*H9	C808	K6	C1021	*H1	C1181	M4	C1461	A2	E303	M2	IC401	E6	IC1007	C2	L5	C7	Q9	D8	R59	*B7	R252	L7	R367	*M5
C40	*E9	C318	L6	C432	E6	C657	H9	C809	*J5	C1022	*H1	C1202	*E3	C1462	A3	E601	K8	IC402	*F6	IC1008	*D3	L6	C8	Q10	*F9	R60	*B7	R253	L7	R368	*M5
C41	*C7	C319	*M5	C433	*E6	C658	H9	C810	*J6	C1023	*F2	C1203	*E3	C1463	A2	E1001	H2	IC403	*F6	IC1009	A4	L7	C7	Q11	*F9	R61	*C9	R254	*M7	R369	*L5
C42	*C7	C320	*L5	C434	C4	C659	*H9	C811	*J5	C1024	*G1	C1204	*E4	C1502	*B5			IC404	*F6	IC1010	G1	L8	B8	Q12	*B6	R62	*B9	R255	*M7	R370	*L5
C43	*C7	C321	*M4	C435	*B5	C660	*H8	C812	*J5	C1025	*E1	C1205	E5	C1503	*B6	FB402	*C4	IC405	*E6	IC1011	*F2	L9	B7	Q13	*B7	R63	*B9	R257	*M7	R371	*M5
C44	*E9	C322	M4	C436	*C5	C661	H9	C813	*K6	C1026	G1	C1206	*E4	C1504	*A5	FB501	*C5	IC406	*F6	IC1012	F2	L10	B7	Q15	*C7	R65	A8	R258	*M7	R372	*M5
C45	D9	C323	M6	C437	C4	C662	H8	C814	*J6	C1027	E2	C1207	E3	C1505	*A5	FB901	*J3	IC407	*F6	IC1013	*F1	L11	*F9	Q17	*C7	R66	A8	R259	*M7	R373	*M5
C46	C9	C324	M6	C438	*F6	C663	*K8	C815	*J5	C1028	*E1	C1208	*F3	C1506	D7	FB902	J2	IC408	*E6	IC1014	*F1	L12	*E9	Q205	M9	R69	*C9	R271	A9	R374	*M5
C47	C7	C326	M6	C439	*E5	C664	*K8	C816	*J6	C1029	*E2	C1209	*E3	C1507	D7	FB903	*H1	IC409	*C5	IC1015	*H2	L13	B7	Q206	M8	R71	A8	R272	*M7	R375	*M5
C48	D7	C327	M6	C440	*F5	C665	*L8	C817	*H5	C1030	*E2	C1210	*E4	C1508	*D7	FB904	*H1	IC410	F6	IC1016	*C6	L15	D8	Q209	M8	R72	A8	R273	*M7	R376	*M5
C49	B7	C328	K2	C501	*D5	C666	*K9	C818	*J6	C1031	*G1	C1211	*F3	C1509	*B5	FB905	J2	IC411	*E6	IC1017	*B6	L101	*M1	Q211	M8	R74	*E9	R274	*M7	R377	*L5
C50	D1	C329	K2	C502	D4	C667	*K9	C819	*H5	C1032	*F1	C1212	*F4	C1510	*B5	FB1011	*D2	IC412	*C4	IC1022	B6	L102	*M1	Q213	M8	R75	C7	R275	*M7	R378	*L5
C51	D1	C330	*M5	C503	D4	C668	*K9	C820	H6	C1033	*G2	C1213	*F3	C1511	*D6	FB1015	*D2	IC413	*B4	IC1026	B7	L201	*M8	Q216	*M8	R76	*C7	R276	*M7	R379	*M3
C52	*E9	C331	M4	C504	D4	C669	J8	C821	H6	C1034	*G1	C1214	*F4	C1512	*C6	FB1016	*D3	IC414	E6	IC1037	D2	L202	*M8	Q301	*M6	R77	*C7	R277	G9	R380	*L5
C53	*B7	C332	M6	C505	*D5	C701	*L8	C822	*J6	C1035	E1	C1215	*F3	C1513	*C7	FB1101	C4	IC415	*E6	IC1038	C2	L203	*M9	Q302	*M6	R79	*C7	R278	G9	R381	*M3
C54	*C7	C333	M6	C506	*D5	C702	K8	C823	*J6	C1036	G2	C1216	*F4	C1514	*D7	FB1103	C3	IC416	*E6	IC1040	C5	L250	*L7	Q303	*K5	R80	C7	R279	G9	R382	*L6
C55	*C6	C334	*M4	C507	C5	C704	*L8	C824	*H6	C1037	*G2	C1217	*F3	C1515	*C6	FB1200	G3	IC417	E7	IC1076	*F2	L251	*M7	Q601	*K9	R81	*E9	R280	G9	R383	*L6
C56	*C7	C335	*M4	C508	*G6	C705	*J7	C825	*H6	C1038	*G2	C1218	*F4	C1516	*B6	FB1201	G5	IC418	E7	IC1077	*H2	L301	*K5	Q602	*K9	R83	G9	R281	G9	R384	*L6
C57	*C7	C336	*M5	C509	*G6	C706	*J7	C826	*H6	C1039	*F1	C1219	*G3	C1517	*G8	FB1202	*G4	IC419	C5	IC1078	B7	L302	*L6	Q603	*J9	R84	G9	R282	G9	R385	*L6
C58	E9	C337	M4	C510	*G6	C707	*L7	C827	*H6	C1040	*E1	C1220	G3	C1518	*G7	FB1203	G3	IC420	E5	IC1080	*F1	L303	M4	Q701	J8	R85	G9	R283	G9	R386	*L6
C59	*F9	C338	M6	C511	*D5	C708	L7	C828	K6	C1041	*C6	C1221	G3	C1519	*F8	FB1401	*B2	IC421	F5	IC1081	*B3	L304	*M6	Q702	J8	R86	*B7	R284	G9	R387	*L6
C60	*F9	C339	*M5	C512	*D5	C709	*L7	C829	*J6	C1042	*B6	C1222	*F4	C1520	*F7	FB1403	*B2	IC501	D5	IC1082	E2	L305	*M5	Q703	J7	R87	*B7	R285	G8	R388	*M3
C61	*E8	C340	*L4	C513	*E5	C710	*J8	C847	*J6	C1043	*H2	C1223	*G3	C1521	*G8	FB1404	*B2	IC502	*G6	IC1083	D2	L306	*M6	Q704	J7	R88	*C6	R286	*M8	R389	*M3
C101	*M1	C341	*L4	C514	C5	C711	*J7	C848	*J6	C1044	H2	C1224	*G3	C1522	*G8			IC503	G6	IC1101	D4	L307	*L4	Q705	*L8	R89	*B7	R287	*M8	R390	*L6
C102	M1	C342	*M4	C515	*G6	C712	J8	C850	*K6	C1049	*A6	C1225	*G4	C1523	*F8	IC1	E9	IC504	*D4	IC1102	*E3	L308	*M2	Q706	*L8	R90	E9	R288	*M8	R391	*L6
C103	K1	C343	*M3	C516	*G6	C713	J7	C851	*K6	C1050	B6	C1226	*G4	C1524	*G8	IC2	E9	IC505	*D4	IC1103	*D3	L309	*M5	Q1101	M3	R91	*F9	R301	*M6	R392	*L6
C104	*K1	C344	M2	C517	*G6	C714	*K8	C852	*J6	C1054	*B6	C1227	*G3	C1525	*F8	IC3	*C7	IC506	*H6	IC1104	*C4	L310	*M4	Q1102	M3	R92	*F9	R302	*L3	R394	*M3
C105	L2	C345	*L3	C518	G7	C715	*J7	C901	*J2	C1055	*A6	C1228	*G3	C1526	*E8	IC4	*C7	IC507	*H6	IC1105	*C4	L311	*M3	Q1103	M3	R102	*M1	R303	*L3	R395	*M3
C106	L2	C346	*L3	C519	*H5	C716	*J7	C902	*H1	C1056	*A6	C1229	*G3	C1528	*E8	IC5	*F9	IC508	*G6	IC1106	C4	L312	*M6	Q1104	M3	R103	*M1	R304	*J4	R396	*M3
C107	*K2	C347	L2	C520	F6	C717	*J7	C903	*J1	C1057	*B6	C1230	*G3	C1529	*E7	IC6	*B7	IC509	*H6	IC1107	*C3	L313	*M6	Q1105	M3	R104	*L2	R305	*K5	R397	*M3
C108	*L1	C348	L3	C521	*G6	C718	*J7	C904	*J3	C1058	*B6	C1231	*G4	C1530	*F8	IC7	*D1	IC511	*E5	IC1108	*C3	L314	*M6	Q1106	M3	R105	*L2	R306	*K5	R398	*M5
C109	*L1	C349	*M3	C522	*G6	C719	*K7	C905	*H3	C1059	B6	C1232	*G4	C1531	*E7	IC8	*C9	IC512	*G6	IC1109	B4	L315	*L4	Q1107	M2	R106	*L1	R307	*K5	R399	L3
C110	*L1	C350	*L3	C523	*G6	C720	*K7	C906	*H3	C1060	*A6	C1233	*G4	C1532	*E7	IC9	*E9	IC513	G5	IC1110	*C3	L316	*M4	Q1108	M2	R107	*L1	R308	K5	R401	*E6
C111	M1	C351	L2	C524	H6	C721	*H8	C907	G3	C1061	A7	C1234	*G4	C1533	*D7	IC10	*C7	IC514	*G5	IC1111	A4	L317	*K5	Q1109	M2	R108	*L2	R309	*M6	R402	*E6
C112	*M1	C352	*L5	C525	*H6	C722	*H8	C908	*G3	C1062	*A7	C1235	*G4	C1534	*F9	IC12	*E9	IC601	K7	IC1112	*D4	L401	*E6	Q1110	M2	R109	*L1	R310	M6	R403	*E6
C113	*K1	C353	*M5	C526	G5	C723	*H8	C909	*K3	C1063	*B7	C1236	*G4	C1535	*G9	IC101	K1	IC602	K7	IC1113	*E4	L402	*F6	Q1111	M2	R110	*L1	R311	*M6	R404	*E6
C201	*M9	C354	*M5	C527	*G5	C724	*H7	C910	J3	C1066	*B7	C1237	*G3	C1536	*F9	IC102	K2	IC603	L7	IC1125	*E3	L502	*F6			R111	*L2	R313	*J4	R405	*E6
C202	L8	C355	K4	C601	*K6	C725	*H7	C911	*J3	C1069	A7	C1238	*G3	C1537	G9	IC103	K2	IC604	K6	IC1201	F4	L601	*J8	R1	G9	R112	*L1	R314	*J4	R406	*E6
C203	*L8	C356	*L5	C602	*K6	C726	*H7	C912	J3	C1070	B7	C1239	G4	C1538	G8	IC104	L2	IC605	L6	IC1202	G3	L603	*L9	R2	G9	R113	*L1	R315	*K4	R407	*E6
C204	M8	C357	*M3	C603	*L6	C727	H8	C913	*K3	C1071	*B7	C1240	*G5			IC105	L1	IC606	K6	IC1203	F5	L604	*K9	R3	G9	R114	*L1	R316	*M5	R408	*E6
C205	*L9	C358	*M3	C604	*K6	C728	*H8	C914	*J3	C1072	B7	C1241	G5	CN1	A8	IC107	L2	IC607	L9	IC1204	F5	L605	*K9	R4	G9	R115	K1	R317	*M5	R409	*E6
C206	M9	C359	*M3	C605	*L6	C729	H7	C915	*J3	C1073	B7	C1242	*F5	CN2	A6	IC108	L2	IC608	J8	IC1401	C3	L610	*H9	R5	G9	R116	L1	R318	*M5	R410	*E6
C208	M9	C360	*M3	C606	*K6	C730	*H7	C916	*G3	C1079	*D2	C1243	*F5	CN3	A4	IC109	*K1	IC610	*K9	IC1402	B2	L611	*H8	R6	*E9	R117	*L1	R319	*L5	R411	*E6
C209	*M9	C361	*M3	C607	*L9	C731	*L7	C918	*K3	C1080	*C2	C1401	*B1	CN4	A2	IC201	M9	IC612	J9	IC1404	B2	L612	H9	R7	*E9	R118	*L1	R320	*M5	R413	*E7
C210	M9	C362	*L4	C608	K9	C732	*H7	C919	K1	C1081	*F2	C1402	C1	CN6	M1	IC208	M9	IC613	*K9	IC1405	C2	L613	H8	R8	*B7	R119	*L1	R321	*M6	R414	F7
C211	*M9	C363	*L4	C609	*L9	C733	*H7	C920	*K3	C1082	*F2	C1403	*C3			IC210	*M8	IC614	J8	IC1406	*B3	L617	H9	R9	*B7	R120	*K1	R322	*M6	R415	F7
C212	*M9	C364	M3	C610	*J9	C734	*H8	C921	K3	C1083	*F2	C1404	*B1	D1	G9	IC250	M8	IC617	K9	IC1407	*B3	L618	H9	R10	*B7	R121	*L1	R323	M6	R416	F7
C213	*M9	C365	*M3	C612	*J8	C735	*H7	C922	*K4	C1084	*E2	C1405	*C3	D2	G9	IC251	M7	IC618	J9	IC1408	B3	L701	*J7	R11	*B7	R122	*L1	R324	*M5	R417	F7
C214	*M8	C366	*M2	C614	*L8	C736	*K8	C923	K2	C1085	*D2	C1406	*C3	D3	G9	IC252	G9	IC619	H9	IC1409	*B3	L702	*L7	R12	*E9	R123	*L1	R325	*M5	R418	F7
C215	M9	C367	M6	C615	L9	C737	*K8	C924	K2	C1086	*D3	C1407	C1	D4	G9	IC253	*M8	IC620	H9	IC1410	B3	L705	H8	R13	*E9	R124	*L2	R326	*M6	R419	*E5
C216	M9	C368	*M3	C616	*L8	C738	K8	C925	*J3	C1087	*C3	C1408	*B2	D5	G9	IC301	L6	IC701	L8	IC1411	*B3	L706	H7	R14	*E9	R125	*L1	R327	*J4	R420	*E5
C220	M8	C369	*M5	C617	*J9	C739	*K8	C926	*G3	C1088	G1	C1409	C2	D6	C1	IC302	L6	IC703	J7	IC1412	B3	L707	K8	R15	*B7	R126	*L1	R328	M4	R421	*F7

R422	*C5	R704	*K7	R848	*K6	R980	*K4	R1106	D4	R1245	*F3	RB322	*M3	RB1508	A5
R431	F7	R705	*J7	R849	*K6	R981	*K3	R1107	E4	R1246	E4	RB401	*E6	RB1509	*D6
R432	F7	R706	*J7	R850	*K6	R982	*K4	R1108	*C4	R1247	E4	RB402	*F6	RB1510	*D5
R434	*C5	R707	*J7	R851	*K6	R983	*K3	R1109	C4	R1248	E4	RB403	*F6	RB1511	*D5
R435	*C5	R708	*J7	R852	*K6	R984	*K4	R1110	C4	R1249	*F3	RB404	F7	RB1512	*D6
R436	*C5	R709	*K8	R853	*K6	R985	*K4	R1111	C4	R1250	*G3	RB405	F7	RB1513	*D6
R437	*C5	R710	*K8	R854	*K6	R986	*H4	R1112	C4	R1251	*G3	RB409	*C5	RB1514	*C6
R438	*C5	R711	*J7	R855	*K6	R989	*H4	R1113	C4	R1252	*G3	RB410	*C5	RB1515	*C5
R439	*C5	R712	*J7	R856	*K6	R990	*H4	R1114	C4	R1253	*G3	RB411	*B5	RB1516	*D5
R440	*L5	R713	*J7	R858	*H6	R991	*H5	R1115	C4	R1254	*F4	RB419	*C5	RB1517	*C5
R441	*E6	R714	*K8	R900	*H2	R992	*H5	R1116	*C4	R1255	*F4	RB420	*C5	RB1518	*B5
R442	*E6	R715	*K7	R901	*K3	R993	*H4	R1117	*C4	R1256	*F4	RB421	*B5	RB1519	*G8
R443	*E6	R716	*H8	R902	*K3	R994	*H4	R1118	*D4	R1401	*C3	RB422	*B5	RB1520	*G8
R444	*E6	R717	*H7	R903	*K3	R995	*H4	R1119	*D4	R1402	*C3	RB501	*E5	RB1521	*G8
R445	*E7	R718	*H8	R904	*K3	R996	*H4	R1120	*D4	R1403	*C3	RB502	*E5	RB1522	*G7
R446	*E7	R719	*H7	R905	*K3	R997	*H4	R1121	*D4	R1405	A2	RB503	*D5	RB1523	*G7
R501	*D5	R720	*K7	R906	*K3	R998	*H2	R1122	*E4	R1406	A2	RB504	*D5	RB1524	*G8
R502	*D5	R721	*H8	R907	*K3	R999	*H2	R1123	*E4	R1407	A2	RB505	H7	RB1525	*F7
R503	*D5	R722	*H8	R908	*K3	R1002	*F2	R1124	*C4	R1408	A2	RB506	G7		
R504	*D5	R723	*H7	R909	*K3	R1003	*F2	R1125	*C4	R1409	*A3	RB507	*D5	RV301	M4
R505	*D5	R724	*H7	R910	*K3	R1004	*F2	R1126	*C4	R1410	*A3	RB508	*D5	RV601	M7
R506	*E5	R725	*K8	R911	*K3	R1005	*F2	R1127	*M3	R1412	B3	RB509	*D5	RV602	M7
R507	*E5	R726	*H8	R912	*K3	R1006	*G2	R1128	*M3	R1416	*C3	RB801	J7		
R508	G7	R727	*H7	R913	*K3	R1007	*H2	R1129	*M5	R1417	*C3	RB802	J7	S101	M2
R509	G7	R728	*K8	R914	*K3	R1009	*H2	R1130	*M3	R1418	*C2	RB803	H7	S601	J9
R510	G7	R729	*K8	R915	*K3	R1010	*C3	R1131	*M3	R1419	*C2	RB804	H7		
R511	G7	R730	*K8	R916	*K3	R1011	*B4	R1132	*M4	R1420	A2	RB901	*F3	THP1	C9
R512	G7	R733	*J8	R917	*K3	R1012	*A3	R1133	*M3	R1421	A3	RB902	*F3	THP2	B9
R513	G7	R734	J8	R918	*K3	R1013	*A4	R1134	*M3	R1422	B3	RB903	*F3	THP3	F9
R514	G7	R735	*H8	R919	*K3	R1014	*A4	R1135	*M4	R1427	*B3	RB904	*F3	THP4	B9
R601	*K7	R736	*H8	R920	K4	R1015	*A4	R1136	*M3	R1428	*B3	RB905	G5	THP5	E9
R602	*K7	R737	*H7	R921	K4	R1016	*B4	R1137	*M3	R1429	*B2	RB906	H5	THP6	C1
R603	*K9	R738	*H7	R922	K2	R1017	*B4	R1138	*M4	R1430	B3	RB915	*F3	THP7	D8
R604	*K9	R739	*J8	R923	*H2	R1018	*B4	R1139	*M3	R1431	*A3	RB916	*F3	THP8	B8
R605	*J9	R740	*J8	R924	*H2	R1019	*H1	R1140	*M3	R1432	*B2	RB917	H5	THP9	A8
R606	*J9	R741	*J8	R925	*H2	R1020	*H1	R1141	*M4	R1433	*B2	RB918	H5		
R609	*J9	R742	*H8	R926	*J2	R1021	*B4	R1142	*M3	R1434	*B2	RB919	J5	TP1	C9
R611	*K9	R743	*H7	R927	*H3	R1023	*G2	R1143	*M3	R1435	*B2	RB920	J5	TP201	M9
R612	*K9	R744	K7	R928	*H2	R1024	*G2	R1144	*M3	R1438	*B2	RB921	J2	TP202	M8
R613	*J9	R745	*H8	R929	*J2	R1025	*F2	R1145	*M3	R1440	A2	RB1001	*F1	TP203	M8
R614	*J9	R746	*H7	R930	*G3	R1026	*F2	R1146	*M3	R1442	*B2	RB1002	*F1	TP250	M8
R615	*J9	R747	H8	R931	*H2	R1027	*F2	R1147	*M6	R1443	B3	RB1012	*D3	TP251	M8
R616	*J9	R748	H7	R932	*G3	R1028	*F2	R1148	*M3	R1501	*A5	RB1013	*D3	TP252	L9
R621	*K9	R751	*H8	R933	*H3	R1029	*F2	R1149	*M3	R1502	*B6	RB1014	*C3	TP253	M8
R622	*K9	R752	*H7	R934	*H3	R1030	*F1	R1150	*M3	R1503	*E7	RB1020	*D2	TP254	M8
R623	*K9	R753	*J7	R935	*H3	R1031	*F1	R1151	*M3	R1504	*E7	RB1021	*D2	TP255	M8
R624	*K8	R754	H8	R936	*H3	R1033	*F1	R1152	*M3	R1505	*D6	RB1022	*D2	TP256	M8
R625	*K9	R755	H7	R937	*J3	R1034	E2	R1153	*M3	R1506	*C5	RB1023	*D2	TP301	L4
R626	*K8	R756	*J7	R938	*J3	R1037	*F1	R1154	*M2	R1507	*F8	RB1024	*D2	TP302	L4
R627	*K9	R757	*J7	R939	*J3	R1038	*F1	R1155	*M2	R1508	*F8	RB1025	*C2	TP303	M4
R628	*K9	R758	*J7	R940	*J3	R1039	*F1	R1156	*M8	R1509	*F8	RB1101	*D4	TP304	M5
R629	*K9	R759	K7	R941	*J4	R1040	*F1	R1157	*M2	R1510	*F8	RB1102	*D4	TP305	L4
R630	*H9	R760	*K7	R942	J2	R1042	*F1	R1158	*M2	R1511	*F8	RB1103	*D4	TP306	L4
R631	*H8	R761	*K7	R943	J2	R1043	*F1	R1159	*M7	R1512	*F8	RB1104	*B4	TP307	L4
R632	*K9	R762	*K7	R944	*H3	R1050	B7	R1200	*E4	R1513	*E8	RB1105	*B4	TP308	M3
R633	*H9	R764	*K7	R945	*H3	R1051	B7	R1201	*E4	R1514	*E7	RB1106	*B4	TP601	H8
R634	*H8	R765	H8	R946	*H3	R1053	*A6	R1202	*E4	R1515	*D7	RB1107	*B3	TP602	H9
R635	*K8	R766	H7	R947	*H3	R1055	*A7	R1203	*E3	R1516	G9	RB1108	*B3	TP603	K8
R636	*H9	R769	*K7	R948	*H3	R1056	*A7	R1204	*E3			RB1109	*D3	TP701	H8
R637	*H9	R770	*K7	R949	*H3	R1057	*B6	R1205	*E3	RB101	*M2	RB1110	*D4	TP702	H7
R638	*H8	R771	*K7	R950	*G3	R1058	*B7	R1206	*E3	RB102	*M1	RB1111	*D3	TP703	K7
R639	*H8	R801	*K6	R951	*J3	R1060	*B7	R1214	*E3	RB250	*M8	RB1112	*D3	TP1001	H2
R640	*K9	R802	*J6	R952	*J3	R1061	*B7	R1215	*E3	RB251	*M8	RB1113	*D3	TP1005	E2
R641	*H9	R803	J7	R953	*G3	R1062	*B7	R1216	*E4	RB252	*M7	RB1114	*C3	TP1006	A7
R642	*H8	R804	J7	R954	*J3	R1063	*B7	R1217	*E4	RB253	*M7	RB1115	*C3	TP1401	C2
R644	*K9	R805	J7	R955	*H3	R1065	*A7	R1218	*E4	RB254	*M7	RB1116	*C3		
R645	*K9	R806	J7	R956	*H3	R1072	*A3	R1219	*E4	RB255	*M7	RB1117	*D4	X301	M5
R646	*H9	R807	J7	R957	*H3	R1077	*F1	R1220	*E4	RB261	*M7	RB1118	*C4	X1001	H1
R647	*H9	R808	*J7	R958	*H3	R1078	*H2	R1222	*E3	RB262	*M7	RB1200	*E3		
R648	*H9	R809	J7	R959	*H3	R1079	*H2	R1223	*E3	RB263	M7	RB1201	*F3		
R649	*H9	R810	*J7	R960	*H3	R1080	*G1	R1224	*E4	RB264	*M7	RB1202	*F3		
R650	*J9	R811	J7	R961	*H3	R1081	*G1	R1225	*E3	RB301	L6	RB1203	*F3		
R651	*J9	R812	*J7	R962	*H3	R1082	*G1	R1226	*F4	RB302	L6	RB1204	E3		
R652	*H9	R813	J7	R963	*H3	R1083	*G1	R1227	*F4	RB303	L6	RB1401	B1		
R653	*H9	R814	*J7	R964	*H3	R1084	*G1	R1228	*F3	RB304	L7	RB1402	B1		
R654	*H9	R815	*K6	R965	*H3	R1085	*D2	R1229	*F4	RB305	L7	RB1403	B2		
R655	H8	R816	*K6	R966	*H4	R1086	D2	R1230	*F3	RB306	L7	RB1404	B2		
R656	*H9	R833	*J6	R967	*H3	R1087	D2	R1231	*F3	RB307	*M4	RB1405	B2		
R657	H9	R834	*J6	R968	*J3	R1088	D3	R1233	*F4	RB310	*L2	RB1406	B3		
R660	*H9	R835	*J6	R969	*J3	R1089	*F2	R1234	*G4	RB311	*L2	RB1407	B3		
R661	*H8	R836	*J6	R970	*H4	R1090	*F2	R1235	*F4	RB312	*K3	RB1408	B2		
R662	H9	R837	*J6	R971	*J4	R1091	*G2	R1236	*G3	RB313	*L3	RB1409	B2		
R663	H8	R839	*J6	R972	*G5	R1092	*A7	R1237	*G3	RB314	*E8	RB1410	B2		
R664	H9	R840	*J6	R973	*J4	R1095	*F1	R1238	*G3	RB315	*L4	RB1501	*A5		
R665	H8	R841	*J6	R974	*J4	R1096	*F1	R1239	*F5	RB316	*M4	RB1502	*B6		
R666	*M7	R842	*J6	R975	*K4	R1101	D4	R1240	*F5	RB317	*L7	RB1503	*A5		
R667	*M7	R843	*J6	R976	*K4	R1102	D4	R1241	*F5	RB318	*L6	RB1504	A6		
R701	*K8	R845	*K6	R977	*K3	R1103	D4	R1242	*F5	RB319	*L6	RB1505	A6		
R702	*K8	R846	*K6	R978	*K4	R1104	D4	R1243	*F3	RB320	*M6	RB1506	B5		
R703	*K7	R847	*K6	R979	*K3	R1105	D4	R1244	*F3	RB321	*M6	RB1507	A5		

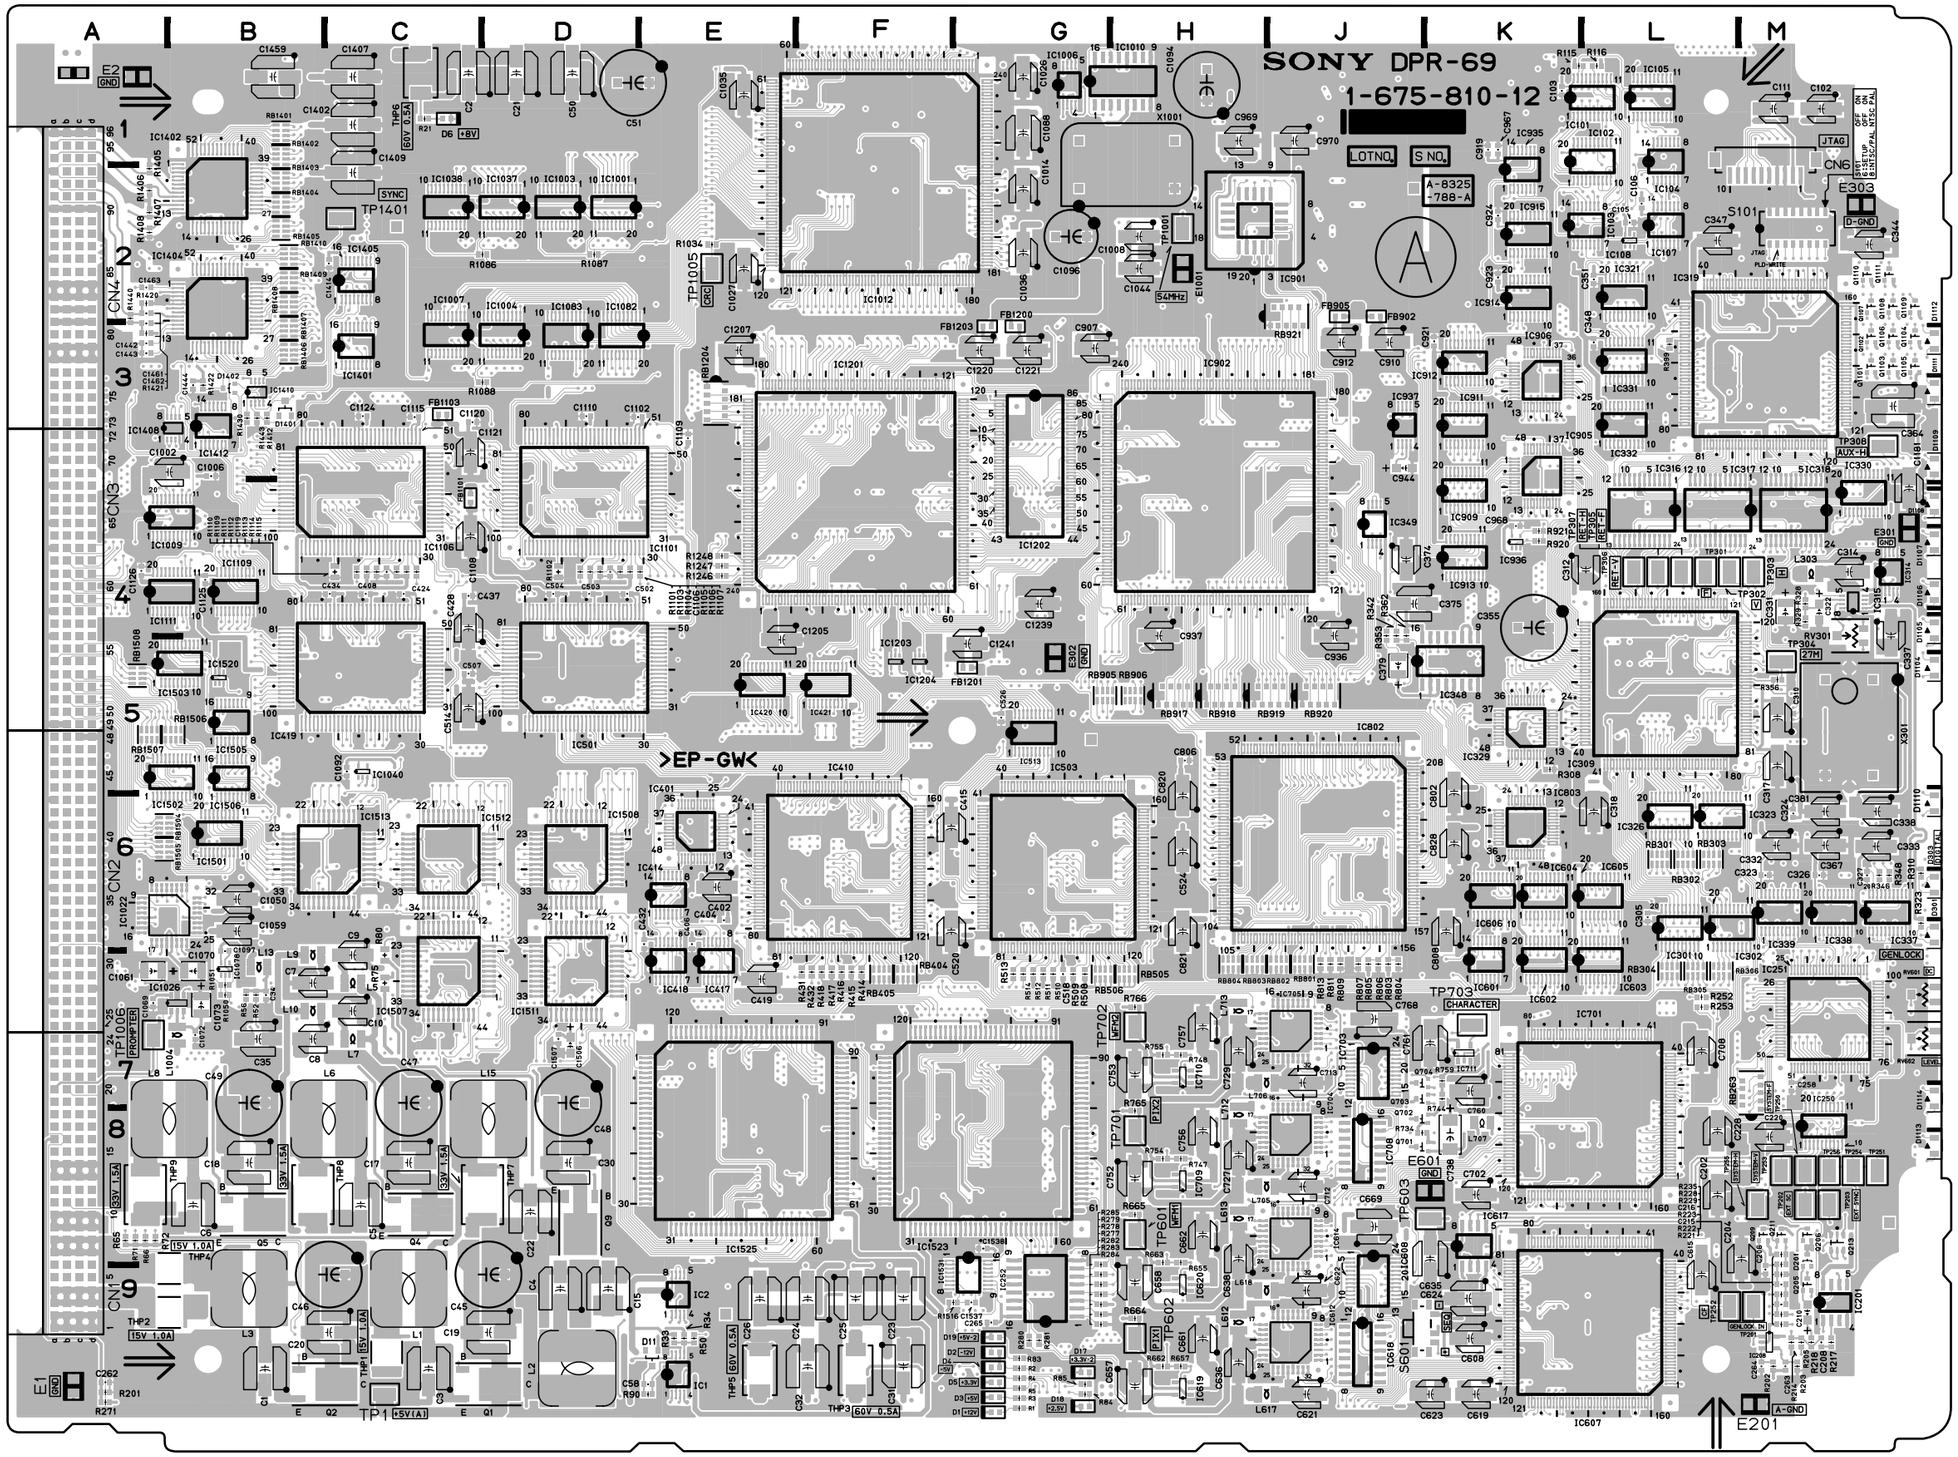
SONY DPR-69
1-675-810-12
LOT NO.
S NO.
A-8325-788-A
>EP-GW<
TP1401
TP1005
TP1006
TP702
TP701
TP601
TP602
TP703
CHARACTER
E601
E201
S101
JTAG
CN1
CN2
CN3
CN4
E303
E301
E302
E1
E2
TP308
AUX-H
TP303
TP304
TP305
TP306
TP307
TP309
TP310
TP311
TP312
TP313
TP314
TP315
TP316
TP317
TP318
TP319
TP320
TP321
TP322
TP323
TP324
TP325
TP326
TP327
TP328
TP329
TP330
TP331
TP332
TP333
TP334
TP335
TP336
TP337
TP338
TP339
TP340
TP341
TP342
TP343
TP344
TP345
TP346
TP347
TP348

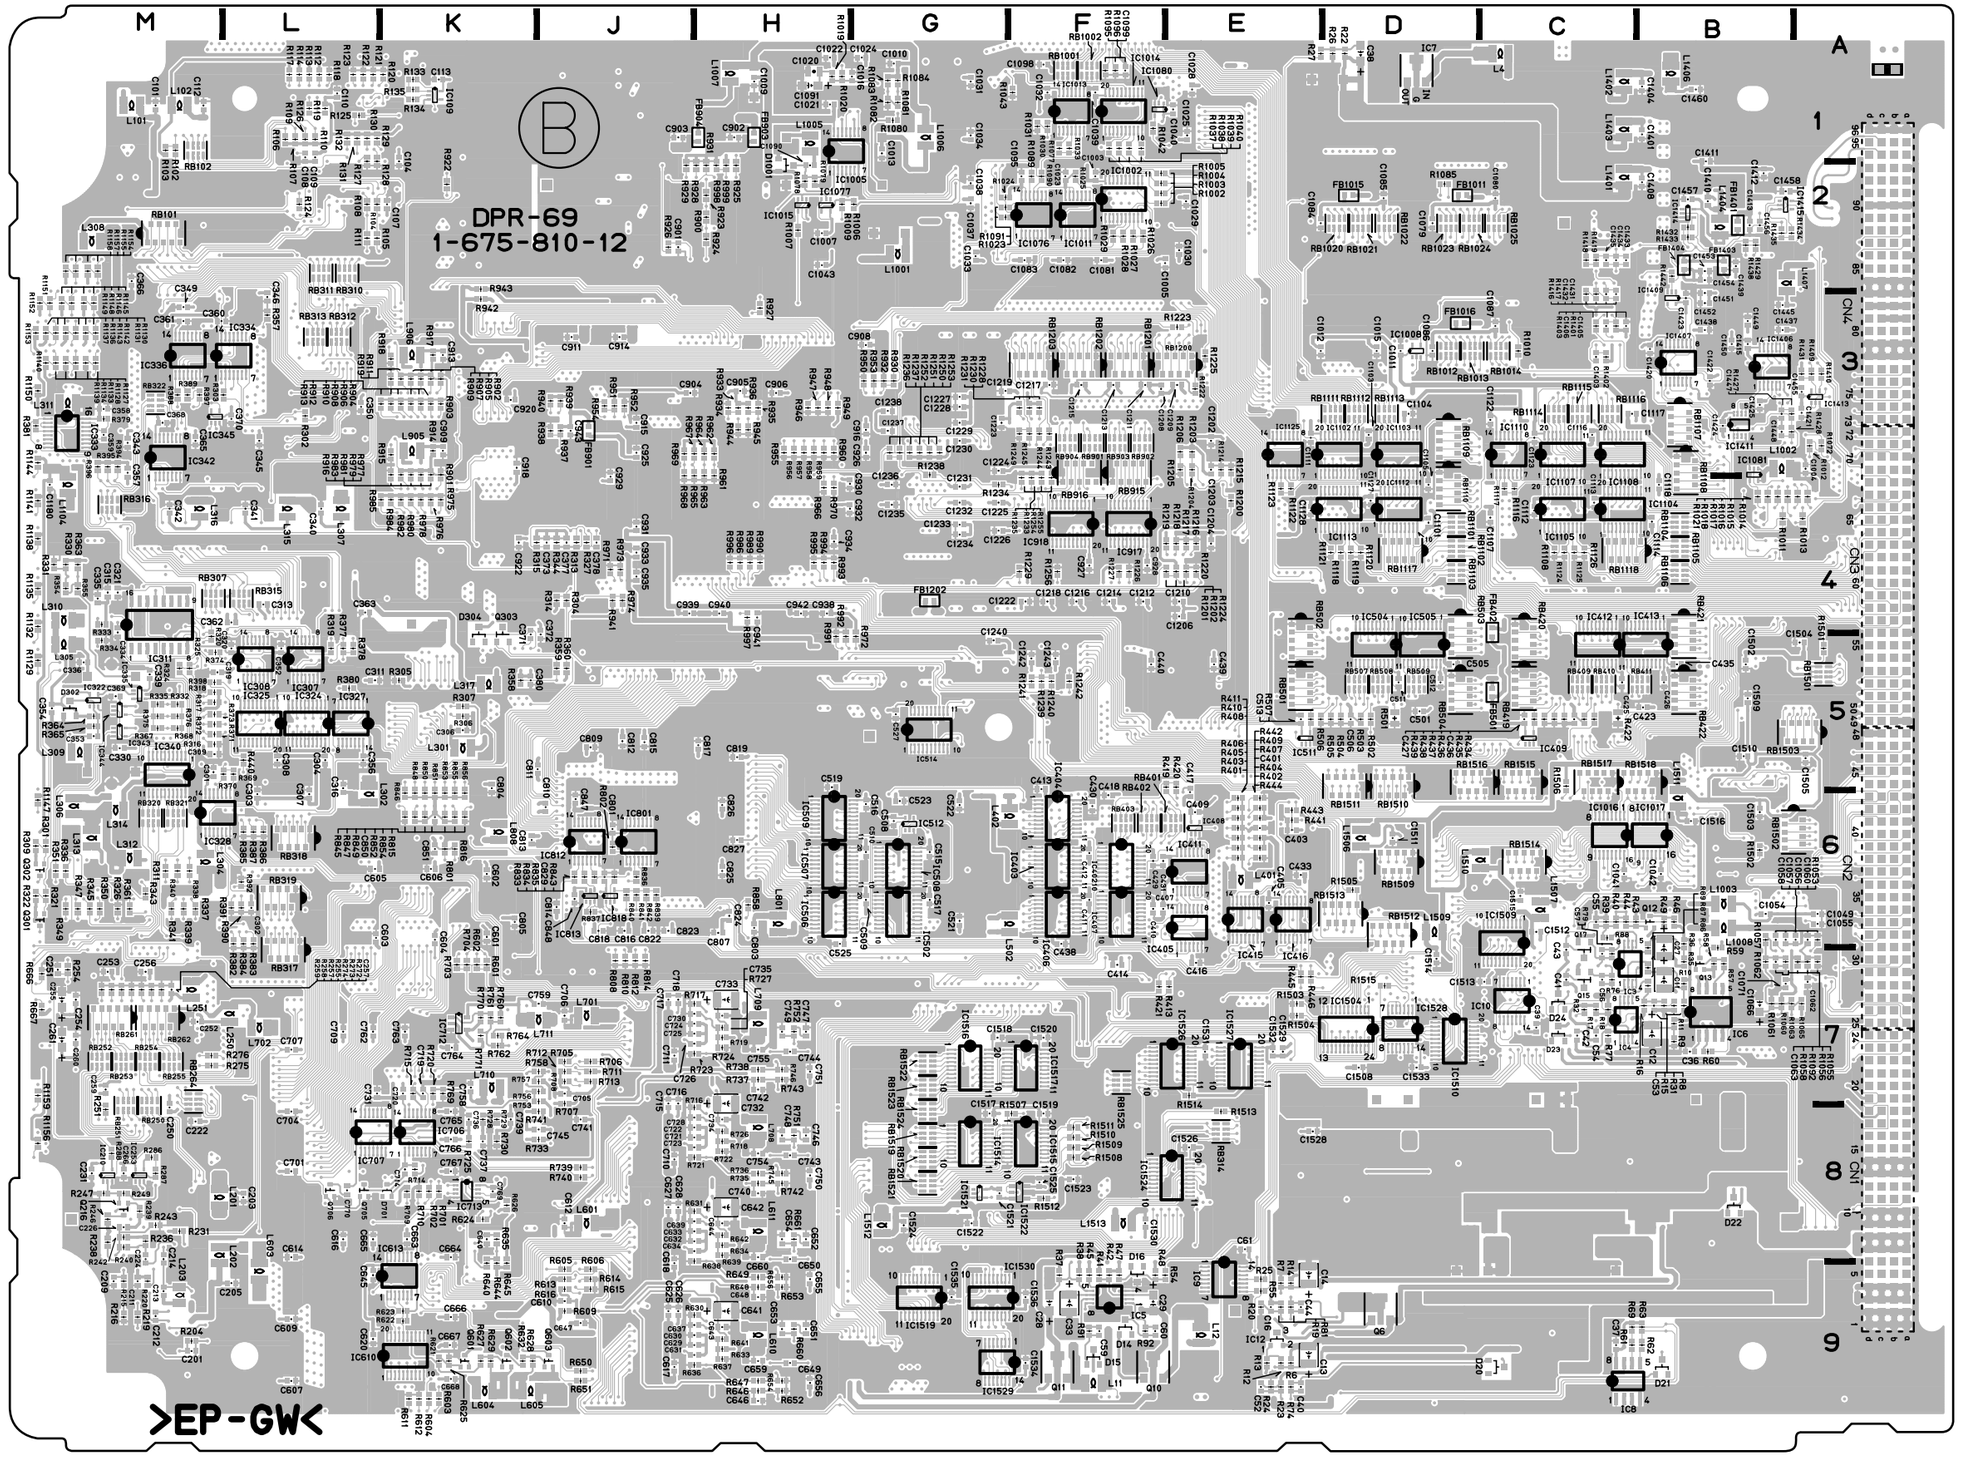

Components location list ; next page

DPR-69 -B SIDE-
SUFFIX: -12

DPR-69 (1-675-810-12)
---

*:B SIDE

C1	B9	C222	*M8	C372	*J5	C620	*L9	C742	*H7	C930	*H4	C1094	H1	C1413	*B2	D16	*F9	IC311	*M5	IC709	H8	IC1504	*D7	L801	*H6	R22	*D1	R133	*K1	R335	*M5
C2	C1	C224	*M8	C373	*J4	C621	J9	C743	*H8	C931	*J4	C1095	*F2	C1414	C2	D17	G9	IC314	M4	IC710	H7	IC1505	B5	L808	*K6	R23	*E9	R134	*K1	R336	*M6
C3	C9	C226	*M8	C374	J4	C622	J9	C744	*H7	C932	*H4	C1096	G2	C1415	*B3	D18	G9	IC315	M4	IC711	K7	IC1506	B6	L905	*K3	R24	*E9	R135	*K1	R337	*M6
C4	D9	C228	L8	C375	J4	C623	K9	C745	*J8	C933	*J4	C1097	B7	C1420	*B3	D19	G9	IC316	L4	IC712	*K7	IC1507	C7	L906	*K3	R25	*E9	R201	A9	R338	*M6
C5	C8	C231	*M8	C377	*J4	C624	K9	C746	*H8	C934	*H4	C1098	*F1	C1421	*A3	D20	*C9	IC317	M4	IC713	*K8	IC1508	D6	L1001	*G2	R26	*D1	R202	M9	R339	*M6
C6	B8	C250	*M8	C378	*J4	C625	*J9	C747	*H7	C935	*J4	C1099	*F1	C1422	*B3	D21	*B9	IC318	M4	IC801	*J6	IC1509	*C6	L1002	*B3	R27	*E1	R203	M9	R340	*M6
C7	B7	C251	*M7	C379	J5	C626	*J9	C748	*H8	C936	J4	C1101	*D4	C1423	*B3	D22	*B8	IC319	M3	IC802	J6	IC1510	*D7	L1003	*B6	R31	*B7	R204	*M9	R341	*M6
C8	B7	C252	*M7	C380	*K5	C627	*J8	C749	*H7	C937	H4	C1102	D3	C1424	*B3	D23	*C7	IC321	L2	IC803	K6	IC1511	D7	L1004	B7	R32	*C7	R205	M9	R342	J4
C9	C7	C253	*M7	C381	M6	C628	*J8	C750	*H8	C938	*H4	C1103	*D3	C1425	*B3	D24	*C7	IC322	*M5	IC812	*J6	IC1512	C6	L1005	*H1	R33	E9	R214	M9	R343	*M6
C10	C7	C254	*M7	C401	*E6	C629	*H9	C751	*H7	C939	*J4	C1104	*D3	C1431	*C3	D201	M8	IC323	L6	IC813	*J6	IC1513	C6	L1006	*G1	R34	E9	R215	*M9	R344	*J4
C11	*B7	C255	*M7	C402	E6	C630	*H9	C752	H8	C940	*H4	C1105	*D4	C1432	*C3	D301	M6	IC324	*L5	IC818	*J6	IC1514	*G8	L1007	*H1	R35	*B7	R216	*M9	R345	*M6
C12	*B7	C256	*M7	C403	*E6	C631	*H9	C753	H7	C941	*H4	C1106	D4	C1433	*C2	D302	*M5	IC325	*L5	IC901	H2	IC1515	*G8	L1008	*B6	R36	*B6	R217	M9	R346	M6
C13	*E9	C257	*M7	C404	E6	C632	*H8	C754	*H8	C942	*H4	C1107	*C4	C1434	*C2	D303	M6	IC326	L6	IC902	H4	IC1516	*G7	L1104	*M4	R37	*F9	R218	M9	R347	*M6
C14	*E9	C258	M7	C405	*E6	C633	*H8	C755	*H7	C943	*J3	C1108	C4	C1435	*C2	D304	*K5	IC327	*L5	IC905	K3	IC1517	*G7	L1401	*C2	R38	*F9	R219	*M9	R348	M6
C15	D9	C259	*M7	C406	E6	C634	*H8	C756	H8	C944	J3	C1109	E3	C1437	*B3	D701	*K8	IC328	*M6	IC906	K3	IC1519	*G9	L1402	*C1	R39	*C6	R220	*M9	R349	*M6
C16	*E9	C260	*M7	C407	*F6	C635	K8	C757	H7	C967	K1	C1110	D3	C1438	*B3	D1001	*H2	IC329	K5	IC909	K4	IC1520	B5	L1403	*C1	R40	*C6	R221	M9	R350	*M6
C17	C8	C261	*M7	C408	C4	C636	H9	C758	*K7	C968	K4	C1111	*E3	C1439	*B2	D1104	M5	IC330	M4	IC911	K3	IC1521	*G8	L1404	*B2	R41	*F9	R222	M9	R351	*M6
C18	B8	C262	A9	C409	*E6	C637	*H9	C759	*J7	C969	H1	C1112	*C4	C1442	A3	D1105	M4	IC331	L3	IC912	K3	IC1522	*F8	L1406	*B1	R42	*F9	R223	M9	R353	J4
C19	D9	C263	M9	C410	*F6	C638	H8	C760	K7	C970	J1	C1113	*C4	C1443	A3	D1106	M4	IC332	L3	IC913	K4	IC1523	G8	L1407	*B2	R43	*C6	R228	M8	R354	*M4
C20	C9	C264	M9	C411	*F6	C639	*H8	C761	K7	C1002	B3	C1114	*B4	C1444	B3	D1107	M4	IC333	*M3	IC914	K2	IC1524	*F8	L1506	*D6	R44	*C6	R229	M9	R355	*M4
C21	D1	C265	G9	C412	*F6	C640	*K8	C762	*L7	C1003	*F2	C1115	C3	C1445	*B3	D1108	M4	IC334	*M3	IC915	K2	IC1525	E8	L1507	*C6	R45	*F9	R231	*M8	R356	M5
C22	D8	C266	*M8	C413	*F5	C641	*H9	C763	*K7	C1004	*A3	C1116	*C3	C1447	*B3	D1109	M3	IC335	*M5	IC917	*F4	IC1526	*F7	L1509	*D6	R46	*B6	R235	M8	R357	*L3
C23	F9	C301	*M5	C414	*F7	C642	*H8	C764	*K7	C1005	*F2	C1117	*C3	C1448	*B3	D1110	M6	IC336	*M3	IC918	*F4	IC1527	*E7	L1510	*C6	R47	*F9	R236	*M8	R358	*K5
C24	F9	C302	*L6	C415	F6	C643	*H9	C765	*K8	C1006	B3	C1118	*B4	C1449	*B3	D1111	M3	IC337	M6	IC935	K2	IC1528	*D7	L1511	*B6	R48	*F9	R238	*M8	R359	*J5
C25	F9	C303	*L6	C416	*E7	C644	*H8	C766	*K8	C1007	*H2	C1119	C4	C1450	*B3	D1112	M3	IC338	M6	IC936	K4	IC1529	*F9	L1512	*G8	R49	*B6	R239	*M8	R360	*J5
C26	E9	C304	*L5	C417	*E6	C645	*L9	C767	*K8	C1008	H2	C1120	C3	C1451	*B3	D1113	M8	IC339	M6	IC937	J3	IC1530	*F9	L1513	*F8	R50	E9	R240	*M8	R361	*M6
C27	*B7	C305	L6	C418	*F6	C646	*H9	C768	J7	C1009	*H1	C1121	C3	C1452	*B3	D1114	M7	IC340	*M5	IC1001	D2	IC1531	F8			R52	B7	R242	*M8	R362	J4
C28	*F9	C306	*K5	C419	E7	C647	*J9	C769	*K8	C1010	*G1	C1122	*C3	C1453	*B2	D1401	B3	IC342	*M4	IC1002	*F2			Q1	D9	R54	*F9	R243	*M8	R363	*M4
C29	*F9	C307	*L6	C423	*B5	C648	*H9	C770	*L8	C1011	*D3	C1123	*C3	C1454	*B2	D1402	B3	IC343	*M5	IC1003	D2	L1	C9	Q2	C9	R55	*E9	R246	*M8	R364	*M5
C30	D8	C308	*L5	C424	C4	C649	*H9	C801	*J6	C1012	*E3	C1124	C3	C1455	*A3			IC344	*M5	IC1004	D2	L2	D9	Q4	C8	R56	B7	R247	*M8	R365	*M5
C31	F9	C309	*M5	C425	*C5	C650	*H8	C802	K5	C1013	*G1	C1125	B4	C1456	*B2	E1	A9	IC345	*M3	IC1005	*H2	L3	B9	Q5	B8	R57	*B7	R249	*M8	R367	*M5
C32	F9	C310	M5	C426	*B5	C651	*H9	C803	*H6	C1014	G2	C1126	A4	C1457	*B2	E2	A1	IC348	J5	IC1006	G1	L4	*C1	Q6	*D9	R58	*B7	R251	*M8	R368	*M5
C33	*F9	C311	*L5	C427	*C5	C652	*H8	C804	*K5	C1015	*D3	C1127	*D4	C1458	*B2	E201	M9	IC349	J4	IC1007	C2	L5	C7	Q9	D8	R59	*B7	R252	L7	R369	*L5
C34	B7	C312	L4	C428	C4	C653	*H9	C805	*K6	C1016	*G1	C1128	*E4	C1459	B1	E301	M4	IC401	E6	IC1008	*D3	L6	C8	Q10	*F9	R60	*B7	R253	L7	R370	*L5
C35	B7	C313	*L4	C429	*F6	C654	*H8	C806	H5	C1020	*H1	C1180	*M4	C1460	*B1	E302	G5	IC402	*F6	IC1009	A4	L7	C7	Q11	*F9	R61	*C9	R254	*M7	R371	*M5
C36	*B7	C314	M4	C430	*F6	C655	*H9	C807	*H6	C1021	*H1	C1181	M4	C1461	A2	E303	M2	IC403	*F6	IC1010	G1	L8	B8	Q12	*B6	R62	*B9	R255	*M7	R372	*M5
C37	*C9	C315	*M4	C431	*F6	C656	*H9	C808	K6	C1022	*H1	C1202	*E3	C1462	A3	E601	K8	IC404	*F6	IC1011	*F2	L9	B7	Q13	*B7	R63	*B9	R257	*M7	R373	*M5
C38	*D1	C316	*L5	C432	E6	C657	H9	C809	*J5	C1023	*F2	C1203	*E3	C1463	A2	E1001	H2	IC405	*E6	IC1012	F2	L10	B7	Q15	*C7	R65	A8	R258	*M7	R374	*M5
C39	*C7	C317	M5	C433	*E6	C658	H9	C810	*J6	C1024	*G1	C1204	*E4	C1502	*B5			IC406	*F6	IC1013	*F1	L11	*F9	Q17	*C7	R66	A8	R259	*M7	R375	*M5
C40	*E9	C318	L6	C434	C4	C659	*H9	C811	*J5	C1025	*E1	C1205	E5	C1503	*B6	FB402	*C4	IC407	*F6	IC1014	*F1	L12	*E9	Q205	M9	R69	*C9	R271	A9	R376	*M5
C41	*C7	C319	*M5	C435	*B5	C660	*H8	C812	*J5	C1026	G1	C1206	*E4	C1504	*A5	FB501	*C5	IC408	*E6	IC1015	*H2	L13	B7	Q206	M8	R71	A8	R272	*M7	R377	*L5
C42	*C7	C320	*L5	C436	*C5	C661	H9	C813	*K6	C1027	E2	C1207	E3	C1505	*A5	FB901	*J3	IC409	*C5	IC1016	*C6	L15	D8	Q209	M8	R72	A8	R273	*M7	R378	*L5
C43	*C7	C321	*M4	C437	C4	C662	H8	C814	*J6	C1028	*E1	C1208	*F3	C1506	D7	FB902	J2	IC410	F6	IC1017	*B6	L101	*M1	Q211	M8	R74	*E9	R274	*M7	R379	*M3
C44	*E9	C322	M4	C438	*F6	C663	*K8	C815	*J5	C1029	*E2	C1209	*E3	C1507	D7	FB903	*H1	IC411	*E6	IC1022	B6	L102	*M1	Q213	M8	R75	C7	R275	*M7	R380	*L5
C45	D9	C323	M6	C439	*E5	C664	*K8	C816	*J6	C1030	*E2	C1210	*E4	C1508	*D7	FB904	*H1	IC412	*C4	IC1026	B7	L201	*M8	Q216	*M8	R76	*C7	R276	*M7	R381	*M3
C46	C9	C324	M6	C440	*F5	C665	*L8	C817	*H5	C1031	*G1	C1211	*F3	C1509	*B5	FB905	J2	IC413	*B4	IC1037	D2	L202	*M8	Q301	*M6	R77	*C7	R277	G9	R382	*L6
C47	C7	C326	M6	C501	*D5	C666	*K9	C818	*J6	C1032	*F1	C1212	*F4	C1510	*B5	FB1011	*D2	IC414	E6	IC1038	C2	L203	*M9	Q302	*M6	R79	*C7	R278	G9	R383	*L6
C48	D7	C327	M6	C502	D4	C667	*K9	C819	*H5	C1033	*G2	C1213	*F3	C1511	*D6	FB1015	*D2	IC415	*E6	IC1040	C5	L250	*L7	Q303	*K5	R80	C7	R279	G9	R384	*L6
C49	B7	C330	*M5	C503	D4	C668	*K9	C820	H6	C1034	*G1	C1214	*F4	C1512	*C6	FB1016	*D3	IC416	*E6	IC1076	*F2	L251	*M7	Q601	*K9	R81	*E9	R280	G9	R385	*L6
C50	D1	C331	M4	C504	D4	C669	J8	C821	H6	C1035	E1	C1215	*F3	C1513	*C7	FB1101	C4	IC417	E7	IC1077	*H2	L301	*K5	Q602	*K9	R83	G9	R281	G9	R386	*L6
C51	D1	C332	M6	C505	*D5	C701	*L8	C822	*J6	C1036	G2	C1216	*F4	C1514	*D7	FB1103	C3	IC418	E7	IC1078	B7	L302	*L6	Q603	*J9	R84	G9	R282	G9	R387	*L6
C52	*E9	C333	M6	C506	*D5	C702	K8	C823	*J6	C1037	*G2	C1217	*F3	C1515	*C6	FB1200	G3	IC419	C5	IC1080	*F1	L303	M4	Q701	J8	R85	G9	R283	G9	R388	*M3
C53	*B7	C334	*M4	C507	C5	C704	*L8	C824	*H6	C1038	*G2	C1218	*F4	C1516	*B6	FB1201	G5	IC420	E5	IC1081	*B3	L304	*M6	Q702	J8	R86	*B7	R284	G9	R389	*M3
C54	*C7	C335	*M4	C508	*G6	C705	*J7	C825	*H6	C1039	*F1	C1219	*G3	C1517	*G8	FB1202	*G4	IC421	F5	IC1082	E2	L305	*M5	Q703	J7	R87	*B7	R285	G8	R390	*L6
C55	*C6	C336	*M5	C509	*G6	C706	*J7	C826	*H6	C1040	*E1	C1220	G3	C1518	*G7	FB1203	G3	IC501	D5	IC1083	D2	L306	*M6	Q704	J7	R88	*C6	R286	*M8	R391	*L6
C56	*C7	C337	M4	C510	*G6	C707	*L7	C827	*H6	C1041	*C6	C1221	G3	C1519	*F8	FB1401	*B2	IC502	*G6	IC1101	D4	L307	*L4	Q705	*L8	R89	*B7	R287	*M8	R392	*L6
C57	*C7	C338	M6	C511	*D5	C708	L7	C828	K6	C1042	*B6	C1222	*F4	C1520	*F7	FB1403	*B2	IC503	G6	IC1102	*E3	L308	*M2	Q706	*L8	R90	E9	R288	*M8	R394	*M3
C58	E9	C339	*M5	C512	*D5	C709	*L7	C829	*J6	C1043	*H2	C1223	*G3	C1521	*G8	FB1404	*B2	IC504	*D4	IC1103	*D3	L309	*M5	Q1101	M3	R91	*F9	R301	*M6	R395	*M3
C59	*F9	C340	*L4	C513	*E5	C710	*J8	C847	*J6	C1044	H2	C1224	*G3	C1522	*G8			IC505	*D4	IC1104	*C4	L310	*M4	Q1102	M3	R92	*F9	R302	*L3	R396	*M3
C60	*F9	C341	*L4	C514	C5	C711	*J7	C848	*J6	C1049	*A6	C1225	*G4	C1523	*F8	IC1	E9	IC506	*H6	IC1105	*C4	L311	*M3	Q1103	M3	R102	*M1	R303	*L3	R397	*M3
C61	*E8	C342	*M4	C515	*G6	C712	J8	C850	*K6	C1050	B6	C1226	*G4	C1524	*G8	IC2	E9	IC507	*H6	IC1106	C4	L312	*M6	Q1104	M3	R103	*M1	R304	*J4	R398	*M5
C101	*M1	C343	*M3	C516	*G6	C713	J7	C851	*K6	C1054	*B6	C1227	*G3	C1525	*F8	IC3	*C7	IC508	*G6	IC1107	*C3	L313	*M6	Q1105	M3	R104	*L2	R305	*K5	R399	L3
C102	M1	C344	M2	C517	*G6	C714	*K8	C901	*J2	C1055	*A6	C1228	*G3	C1526	*E8	IC4	*C7	IC509	*H6	IC1108	*C3	L314	*M6	Q1106	M3	R105	*L2	R306	*K5	R401	*E6
C103	K1	C345	*L3	C518	G7	C715	*J7	C902	*H1	C1056	*A6	C1229	*G3	C1528	*E8	IC5	*F9	IC511	*E5	IC1109	B4	L315	*L4	Q1107	M2	R106	*L1	R307	*K5	R402	*E6
C104	*K1	C346	*L3	C519	*H5	C716	*J7	C903	*J1	C1057	*B6	C1230	*G3	C1529	*E7	IC6	*B7	IC512	*G6	IC1110	*C3	L316	*M4	Q1108	M2	R107	*L1	R308	K5	R403	*E6
C105	L2	C347	L2	C520	F6	C717	*J7	C904	*J3	C1058	*B6	C1231	*G4	C1530	*F8	IC7	*D1	IC513	G5	IC1111	A4	L317	*K5	Q1109	M2	R108	*L2	R309	*M6	R404	*E6
C106	L2	C348	L3	C521	*G6	C718	*J7	C905	*H3	C1059	B6	C1232	*G4	C1531	*E7	IC8	*C9	IC514	*G5	IC1112	*D4	L401	*E6	Q1110	M2	R109	*L1	R310	M6	R405	*E6
C107	*K2	C349	*M3	C522	*G6	C719	*K7	C906	*H3	C1060	*A6	C1233	*G4	C1532	*E7	IC9	*E9	IC601	K7	IC1113	*E4	L402	*F6	Q1111	M2	R110	*L1	R311	*M6	R406	*E6
C108	*L1	C350	*L3	C523	*G6	C720	*K7	C907	G3	C1061	A7	C1234	*G4	C1533	*D7	IC10	*C7	IC602	K7	IC1125	*E3	L502	*F6			R111	*L2	R313	*J4	R407	*E6
C109	*L1	C351	L2	C524	H6	C721	*H8	C908	*G3	C1062	*A7	C1235	*G4	C1534	*F9	IC12	*E9	IC603	L7	IC1201	F4	L601	*J8	R1	G9	R112	*L1	R314	*J4	R408	*E6
C110	*L1	C352	*L5	C525	*H6	C722	*H8	C909	*K3	C1063	*B7	C1236	*G4	C1535	*G9	IC101	K1	IC604	K6	IC1202	G3	L603	*L9	R2	G9	R113	*L1	R315	*K4	R409	*E6
C111	M1	C353	*M5	C526	G5	C723	*H8	C910	J3	C1066	*B7	C1237	*G3	C1536	*F9	IC102	K2	IC605	L6	IC1203	F5	L604	*K9	R3	G9	R114	*L1	R316	*M5	R410	*E6
C112	*M1	C354	*M5	C527	*G5	C724	*H7	C911	*J3	C1069	A7	C1238	*G3	C1537	G9	IC103	K2	IC606	K6	IC1204	F5	L605	*K9	R4	G9	R115	K1	R317	*M5	R411	*E6
C113	*K1	C355	K4	C601	*K6	C725	*H7	C912	J3	C1070	B7	C1239	G4	C1538	G8	IC104	L2	IC607	L9	IC1401	C3	L610	*H9	R5	G9	R116	L1	R318	*M5	R413	*E7
C201	*M9	C356	*L5	C602	*K6	C726	*H7	C913	*K3	C1071	*B7	C1240	*G5			IC105	L1	IC608	J8	IC1402	B2	L611	*H8	R6	*E9	R117	*L1	R319	*L5	R414	F7
C202	L8	C357	*M3	C603	*L6	C727	H8	C914	*J3	C1072	B7	C1241	G5	CN1	A8	IC107	L2	IC610	*K9	IC1404	B2	L612	H9	R7	*E9	R118	*L1	R320	*M5	R415	F7
C203	*L8	C358	*M3	C604	*K6	C728	*H8	C915	*J3	C1073	B7	C1242	*F5	CN2	A6	IC108	L2	IC612	J9	IC1405	C2	L613	H8	R8	*B7	R119	*L1	R321	*M6	R416	F7
C204	M8	C359	*M3	C605	*L6	C729	H7	C916	*G3	C1079	*D2	C1243	*F5	CN3	A4	IC109	*K1	IC613	*K9	IC1406	*B3	L617	H9	R9	*B7	R120	*K1	R322	*M6	R417	F7
C205	*L9	C360	*M3	C606	*K6	C730	*H7	C918	*K3	C1080	*C2	C1401	*B1	CN4	A2	IC201	M9	IC614	J8	IC1407	*B3	L618	H9	R10	*B7	R121	*L1	R323	M6	R418	F7
C206	M9	C361	*M3	C607	*L9	C731	*L7	C919	K1	C1081	*F2	C1402	C1	CN6	M1	IC208	M9	IC617	K9	IC1408	B3	L701	*J7	R11	*B7	R122	*L1	R324	*M5	R419	*E5
C208	M9	C362	*L4	C608	K9	C732	*H7	C920	*K3	C1082	*F2	C1403	*C3			IC210	*M8	IC618	J9	IC1409	*B3	L702	*L7	R12	*E9	R123	*L1	R325	*M5	R420	*E5
C209	*M9	C363	*L4	C609	*L9	C733	*H7	C921	K3	C1083	*F2	C1404	*B1	D1	G9	IC250	M8	IC619	H9	IC1410	B3	L705	H8	R13	*E9	R124	*L2	R326	*M6	R421	*F7
C210	M9	C364	M3	C610	*J9	C734	*H8	C922	*K4	C1084	*E2	C1405	*C3	D2	G9	IC251	M7	IC620	H9	IC1411	*B3	L706	H7	R14	*E9	R125	*L1	R327	*J4	R422	*C5
C211	*M9	C365	*M3	C612	*J8	C735	*H7	C923	K2	C1085	*D2	C1406	*C3	D3	G9	IC252	G9	IC701	L8	IC1412	B3	L707	K8	R15	*B7	R126	*L1	R328	M4	R431	F7
C212	*M9	C366	*M2	C614	*L8	C736	*K8	C924	K2	C1086	*D3	C1407	C1	D4	G9	IC253	*M8	IC703	J7	IC1413	*A3	L708	*H8	R16	*B7	R127	*L1	R329	M4	R432	F7
C213	*M9	C367	M6	C615	L9	C737	*K8	C925	*J3	C1087	*C3	C1408	*B2	D5	G9	IC301	L6	IC704	J8	IC1414	*B2	L709	*H7	R17	*C7	R128	*L1	R330	*M4	R434	*C5
C214	*M8	C368	*M3	C616	*L8	C738	K8	C926	*G3	C1088	G1	C1409	C2	D6	C1	IC302	L6	IC705	J7	IC1415	*B2	L710	*K7	R18	*C7	R129	*L1	R331	*M4	R435	*C5
C215	M9	C369	*M5	C617	*J9	C739	*K8	C927	*F4	C1090	*H2	C1410	*B2	D11	E9	IC307	*L5	IC706	*K8	IC1501	B6	L711	*J7	R19	*E9	R130	*L1	R332	*M5	R436	*C5
C216	M9	C370	*L3	C618	*J9	C740	*H8	C928	*F4	C1091	*H1	C1411	*B1	D14	*F9	IC308	*L5	IC707	*L8	IC1502	A6	L712	H8	R20	*E9	R131	*L1	R333	*M4	R437	*C5
C220	M8	C371	*K5	C619	K9	C741	*J8	C929	*J4	C1092	C5	C1412	*B2	D15	*F9	IC309	L5	IC708	J8	IC1503	A5	L713	H7	R21	C1	R132	*L1	R334	*M5	R438	*C5

R439	*C5	R712	*J7	R856	*K6	R990	*H4	R1114	C4	R1253	*G3	RB411	*B5	RB1516	*D5
R440	*L5	R713	*J7	R858	*H6	R991	*H5	R1115	C4	R1254	*F4	RB419	*C5	RB1517	*C5
R441	*E6	R714	*K8	R900	*H2	R992	*H5	R1116	*C4	R1255	*F4	RB420	*C5	RB1518	*B5
R442	*E6	R715	*K7	R901	*K3	R993	*H4	R1117	*C4	R1256	*F4	RB421	*B5	RB1519	*G8
R443	*E6	R716	*H8	R902	*K3	R994	*H4	R1118	*D4	R1401	*C3	RB422	*B5	RB1520	*G8
R444	*E6	R717	*H7	R903	*K3	R995	*H4	R1119	*D4	R1402	*C3	RB501	*E5	RB1521	*G8
R445	*E7	R718	*H8	R904	*K3	R996	*H4	R1120	*D4	R1403	*C3	RB502	*E5	RB1522	*G7
R446	*E7	R719	*H7	R905	*K3	R997	*H4	R1121	*D4	R1405	A2	RB503	*D5	RB1523	*G7
R501	*D5	R720	*K7	R906	*K3	R998	*H2	R1122	*E4	R1406	A2	RB504	*D5	RB1524	*G8
R502	*D5	R721	*H8	R907	*K3	R999	*H2	R1123	*E4	R1407	A2	RB505	H7	RB1525	*F7
R503	*D5	R722	*H8	R908	*K3	R1002	*F2	R1124	*C4	R1408	A2	RB506	G7		
R504	*D5	R723	*H7	R909	*K3	R1003	*F2	R1125	*C4	R1409	*A3	RB507	*D5	RV301	M4
R505	*D5	R724	*H7	R910	*K3	R1004	*F2	R1126	*C4	R1410	*A3	RB508	*D5	RV601	M7
R506	*E5	R725	*K8	R911	*K3	R1005	*F2	R1127	*M3	R1412	B3	RB509	*D5	RV602	M7
R507	*E5	R726	*H8	R912	*K3	R1006	*G2	R1128	*M3	R1416	*C3	RB801	J7		
R508	G7	R727	*H7	R913	*K3	R1007	*H2	R1129	*M5	R1417	*C3	RB802	J7	S101	M2
R509	G7	R728	*K8	R914	*K3	R1009	*H2	R1130	*M3	R1418	*C2	RB803	H7	S601	J9
R510	G7	R729	*K8	R915	*K3	R1010	*C3	R1131	*M3	R1419	*C2	RB804	H7		
R511	G7	R730	*K8	R916	*K3	R1011	*B4	R1132	*M4	R1420	A2	RB901	*F3	THP1	C9
R512	G7	R733	*J8	R917	*K3	R1012	*A3	R1133	*M3	R1421	A3	RB902	*F3	THP2	B9
R513	G7	R734	J8	R918	*K3	R1013	*A4	R1134	*M3	R1422	B3	RB903	*F3	THP3	F9
R514	G7	R735	*H8	R919	*K3	R1014	*A4	R1135	*M4	R1427	*B3	RB904	*F3	THP4	B9
R601	*K7	R736	*H8	R920	K4	R1015	*A4	R1136	*M3	R1428	*B3	RB905	G5	THP5	E9
R602	*K7	R737	*H7	R921	K4	R1016	*B4	R1137	*M3	R1429	*B2	RB906	H5	THP6	C1
R603	*K9	R738	*H7	R922	*K2	R1017	*B4	R1138	*M4	R1430	B3	RB915	*F3	THP7	D8
R604	*K9	R739	*J8	R923	*H2	R1018	*B4	R1139	*M3	R1431	*A3	RB916	*F3	THP8	B8
R605	*J9	R740	*J8	R924	*H2	R1019	*H1	R1140	*M3	R1432	*B2	RB917	H5	THP9	A8
R606	*J9	R741	*J8	R925	*H2	R1020	*H1	R1141	*M4	R1433	*B2	RB918	H5		
R609	*J9	R742	*H8	R926	*J2	R1021	*B4	R1142	*M3	R1434	*B2	RB919	J5	TP1	C9
R611	*K9	R743	*H7	R927	*H3	R1023	*G2	R1143	*M3	R1435	*B2	RB920	J5	TP201	M9
R612	*K9	R744	K7	R928	*H2	R1024	*G2	R1144	*M3	R1438	*B2	RB921	J2	TP202	M8
R613	*J9	R745	*H8	R929	*J2	R1025	*F2	R1145	*M3	R1440	A2	RB1001	*F1	TP203	M8
R614	*J9	R746	*H7	R930	*G3	R1026	*F2	R1146	*M3	R1442	*B2	RB1002	*F1	TP250	M8
R615	*J9	R747	H8	R931	*H2	R1027	*F2	R1147	*M6	R1443	B3	RB1012	*D3	TP251	M8
R616	*J9	R748	H7	R932	*G3	R1028	*F2	R1148	*M3	R1501	*A5	RB1013	*D3	TP252	L9
R621	*K9	R751	*H8	R933	*H3	R1029	*F2	R1149	*M3	R1502	*B6	RB1014	*C3	TP253	M8
R622	*K9	R752	*H7	R934	*H3	R1030	*F1	R1150	*M3	R1503	*E7	RB1020	*D2	TP254	M8
R623	*K9	R753	*J7	R935	*H3	R1031	*F1	R1151	*M3	R1504	*E7	RB1021	*D2	TP255	M8
R624	*K8	R754	H8	R936	*H3	R1033	*F1	R1152	*M3	R1505	*D6	RB1022	*D2	TP256	M8
R625	*K9	R755	H7	R937	*J3	R1034	E2	R1153	*M3	R1506	*C5	RB1023	*D2	TP301	L4
R626	*K8	R756	*J7	R938	*J3	R1037	*F1	R1154	*M2	R1507	*F8	RB1024	*D2	TP302	L4
R627	*K9	R757	*J7	R939	*J3	R1038	*F1	R1155	*M2	R1508	*F8	RB1025	*C2	TP303	M4
R628	*K9	R758	*J7	R940	*J3	R1039	*F1	R1156	*M8	R1509	*F8	RB1101	*D4	TP304	M5
R629	*K9	R759	K7	R941	*J4	R1040	*F1	R1157	*M2	R1510	*F8	RB1102	*D4	TP305	L4
R630	*H9	R760	*K7	R942	*K3	R1042	*F1	R1158	*M2	R1511	*F8	RB1103	*D4	TP306	L4
R631	*H8	R761	*K7	R943	*K2	R1043	*F1	R1159	*M7	R1512	*F8	RB1104	*B4	TP307	L4
R632	*K9	R762	*K7	R944	*H3	R1050	B7	R1200	*E4	R1513	*E8	RB1105	*B4	TP308	M3
R633	*H9	R764	*K7	R945	*H3	R1051	B7	R1201	*E4	R1514	*E7	RB1106	*B4	TP601	H8
R634	*H8	R765	H8	R946	*H3	R1053	*A6	R1202	*E4	R1515	*D7	RB1107	*B3	TP602	H9
R635	*K8	R766	H7	R947	*H3	R1055	*A7	R1203	*E3	R1516	G9	RB1108	*B3	TP603	K8
R636	*H9	R769	*K7	R948	*H3	R1056	*A7	R1204	*E3			RB1109	*D3	TP701	H8
R637	*H9	R770	*K7	R949	*H3	R1057	*B6	R1205	*E3	RB101	*M2	RB1110	*D4	TP702	H7
R638	*H8	R771	*K7	R950	*G3	R1058	*B7	R1206	*E3	RB102	*M1	RB1111	*D3	TP703	K7
R639	*H8	R801	*K6	R951	*J3	R1060	*B7	R1214	*E3	RB250	*M8	RB1112	*D3	TP1001	H2
R640	*K9	R802	*J6	R952	*J3	R1061	*B7	R1215	*E3	RB251	*M8	RB1113	*D3	TP1005	E2
R641	*H9	R803	J7	R953	*G3	R1062	*B7	R1216	*E4	RB252	*M7	RB1114	*C3	TP1006	A7
R642	*H8	R804	J7	R954	*J3	R1063	*B7	R1217	*E4	RB253	*M7	RB1115	*C3	TP1401	C2
R644	*K9	R805	J7	R955	*H3	R1065	*A7	R1218	*E4	RB254	*M7	RB1116	*C3		
R645	*K9	R806	J7	R956	*H3	R1072	*A3	R1219	*E4	RB255	*M7	RB1117	*D4	X301	M5
R646	*H9	R807	J7	R957	*H3	R1077	*F1	R1220	*E4	RB261	*M7	RB1118	*C4	X1001	H1
R647	*H9	R808	*J7	R958	*H3	R1078	*H2	R1222	*E3	RB262	*M7	RB1200	*E3		
R648	*H9	R809	J7	R959	*H3	R1079	*H2	R1223	*E3	RB263	M7	RB1201	*F3		
R649	*H9	R810	*J7	R960	*H3	R1080	*G1	R1224	*E4	RB264	*M7	RB1202	*F3		
R650	*J9	R811	J7	R961	*H3	R1081	*G1	R1225	*E3	RB301	L6	RB1203	*F3		
R651	*J9	R812	*J7	R962	*H3	R1082	*G1	R1226	*F4	RB302	L6	RB1204	E3		
R652	*H9	R813	J7	R963	*H3	R1083	*G1	R1227	*F4	RB303	L6	RB1401	B1		
R653	*H9	R814	*J7	R964	*H3	R1084	*G1	R1228	*F3	RB304	L7	RB1402	B1		
R654	*H9	R815	*K6	R965	*H3	R1085	*D2	R1229	*F4	RB305	L7	RB1403	B2		
R655	H8	R816	*K6	R966	*H4	R1086	D2	R1230	*F3	RB306	L7	RB1404	B2		
R656	*H9	R833	*J6	R967	*H3	R1087	D2	R1231	*F3	RB307	*M4	RB1405	B2		
R657	H9	R834	*J6	R968	*J3	R1088	D3	R1233	*F4	RB310	*L2	RB1406	B3		
R660	*H9	R835	*J6	R969	*J3	R1089	*F2	R1234	*G4	RB311	*L2	RB1407	B3		
R661	*H8	R836	*J6	R970	*H4	R1090	*F2	R1235	*F4	RB312	*L3	RB1408	B2		
R662	H9	R837	*J6	R971	*J4	R1091	*G2	R1236	*G3	RB313	*L3	RB1409	B2		
R663	H8	R839	*J6	R972	*G5	R1092	*A7	R1237	*G3	RB314	*E8	RB1410	B2		
R664	H9	R840	*J6	R973	*J4	R1095	*F1	R1238	*G3	RB315	*L4	RB1501	*A5		
R665	H8	R841	*J6	R974	*J4	R1096	*F1	R1239	*F5	RB316	*M4	RB1502	*B6		
R666	*M7	R842	*J6	R975	*K4	R1101	D4	R1240	*F5	RB317	*L7	RB1503	*A5		
R667	*M7	R843	*J6	R976	*K4	R1102	D4	R1241	*F5	RB318	*L6	RB1504	A6		
R701	*K8	R845	*K6	R977	*K3	R1103	D4	R1242	*F5	RB319	*L6	RB1505	A6		
R702	*K8	R846	*K6	R978	*K4	R1104	D4	R1243	*F3	RB320	*M6	RB1506	B5		
R703	*K7	R847	*K6	R979	*K3	R1105	D4	R1244	*F3	RB321	*M6	RB1507	A5		
R704	*K7	R848	*K6	R980	*K4	R1106	D4	R1245	*F3	RB322	*M3	RB1508	A5		
R705	*J7	R849	*K6	R981	*K3	R1107	E4	R1246	E4	RB401	*E6	RB1509	*D6		
R706	*J7	R850	*K6	R982	*K4	R1108	*C4	R1247	E4	RB402	*F6	RB1510	*D5		
R707	*J7	R851	*K6	R983	*K3	R1109	C4	R1248	E4	RB403	*F6	RB1511	*D5		
R708	*J7	R852	*K6	R984	*K4	R1110	C4	R1249	*F3	RB404	F7	RB1512	*D6		
R709	*K8	R853	*K6	R985	*K4	R1111	C4	R1250	*G3	RB405	F7	RB1513	*D6		
R710	*K8	R854	*K6	R986	*H4	R1112	C4	R1251	*G3	RB409	*C5	RB1514	*C6		
R711	*J7	R855	*K6	R989	*H4	R1113	C4	R1252	*G3	RB410	*C5	RB1515	*C5		

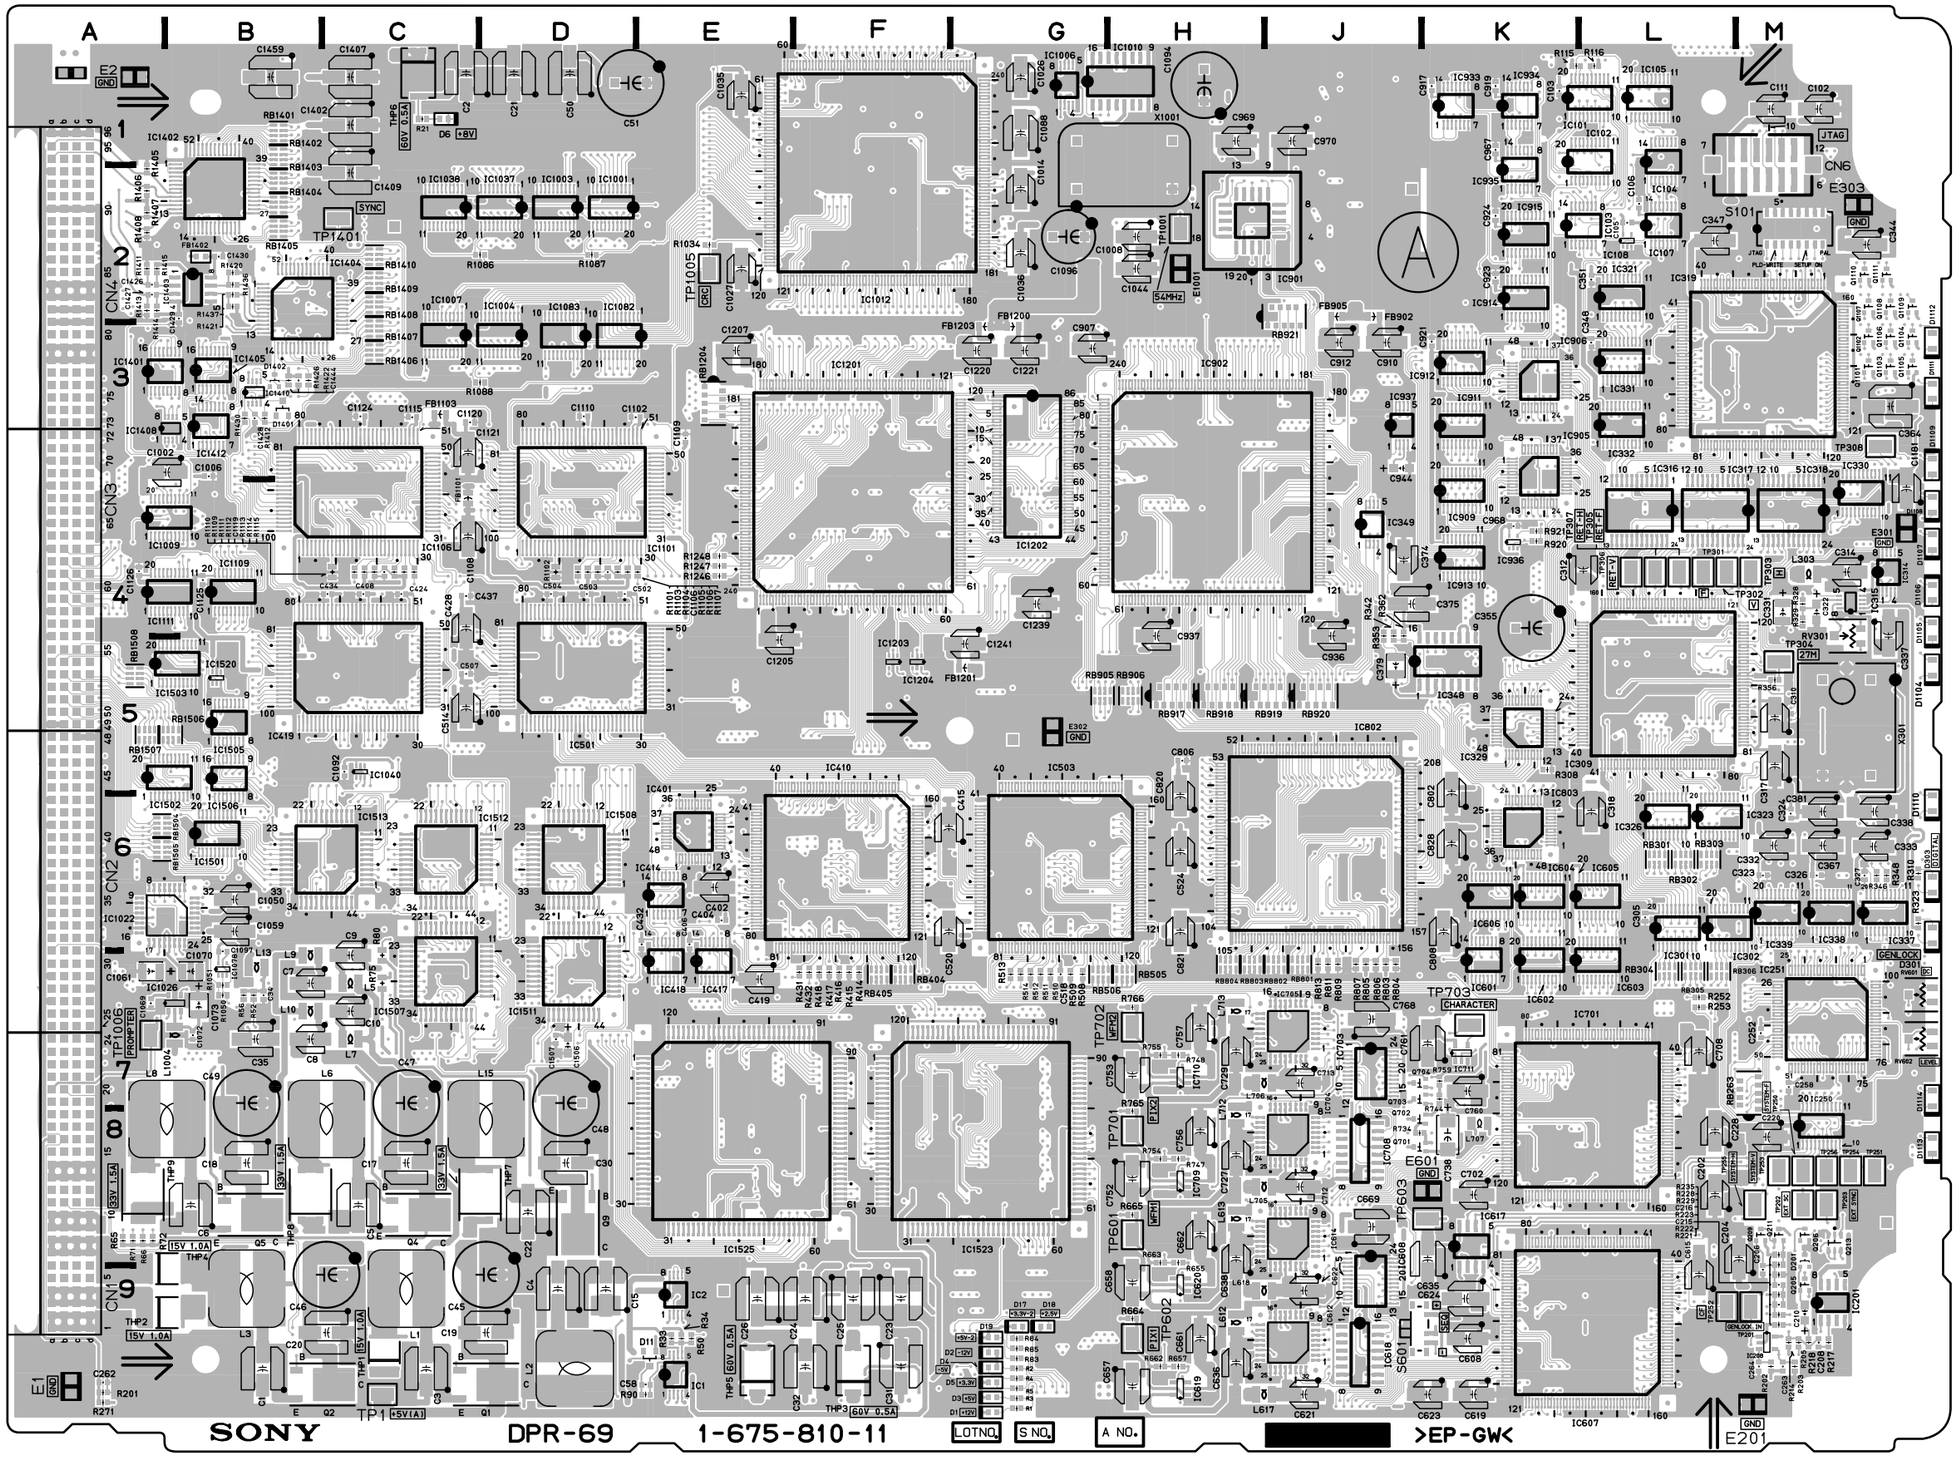

CCU-900 (UC) : S/N 10001 through 10010
CCU-900P (CE) : S/N 40001 through 40007

DPR-69 -A SIDE-
SUFFIX: -11

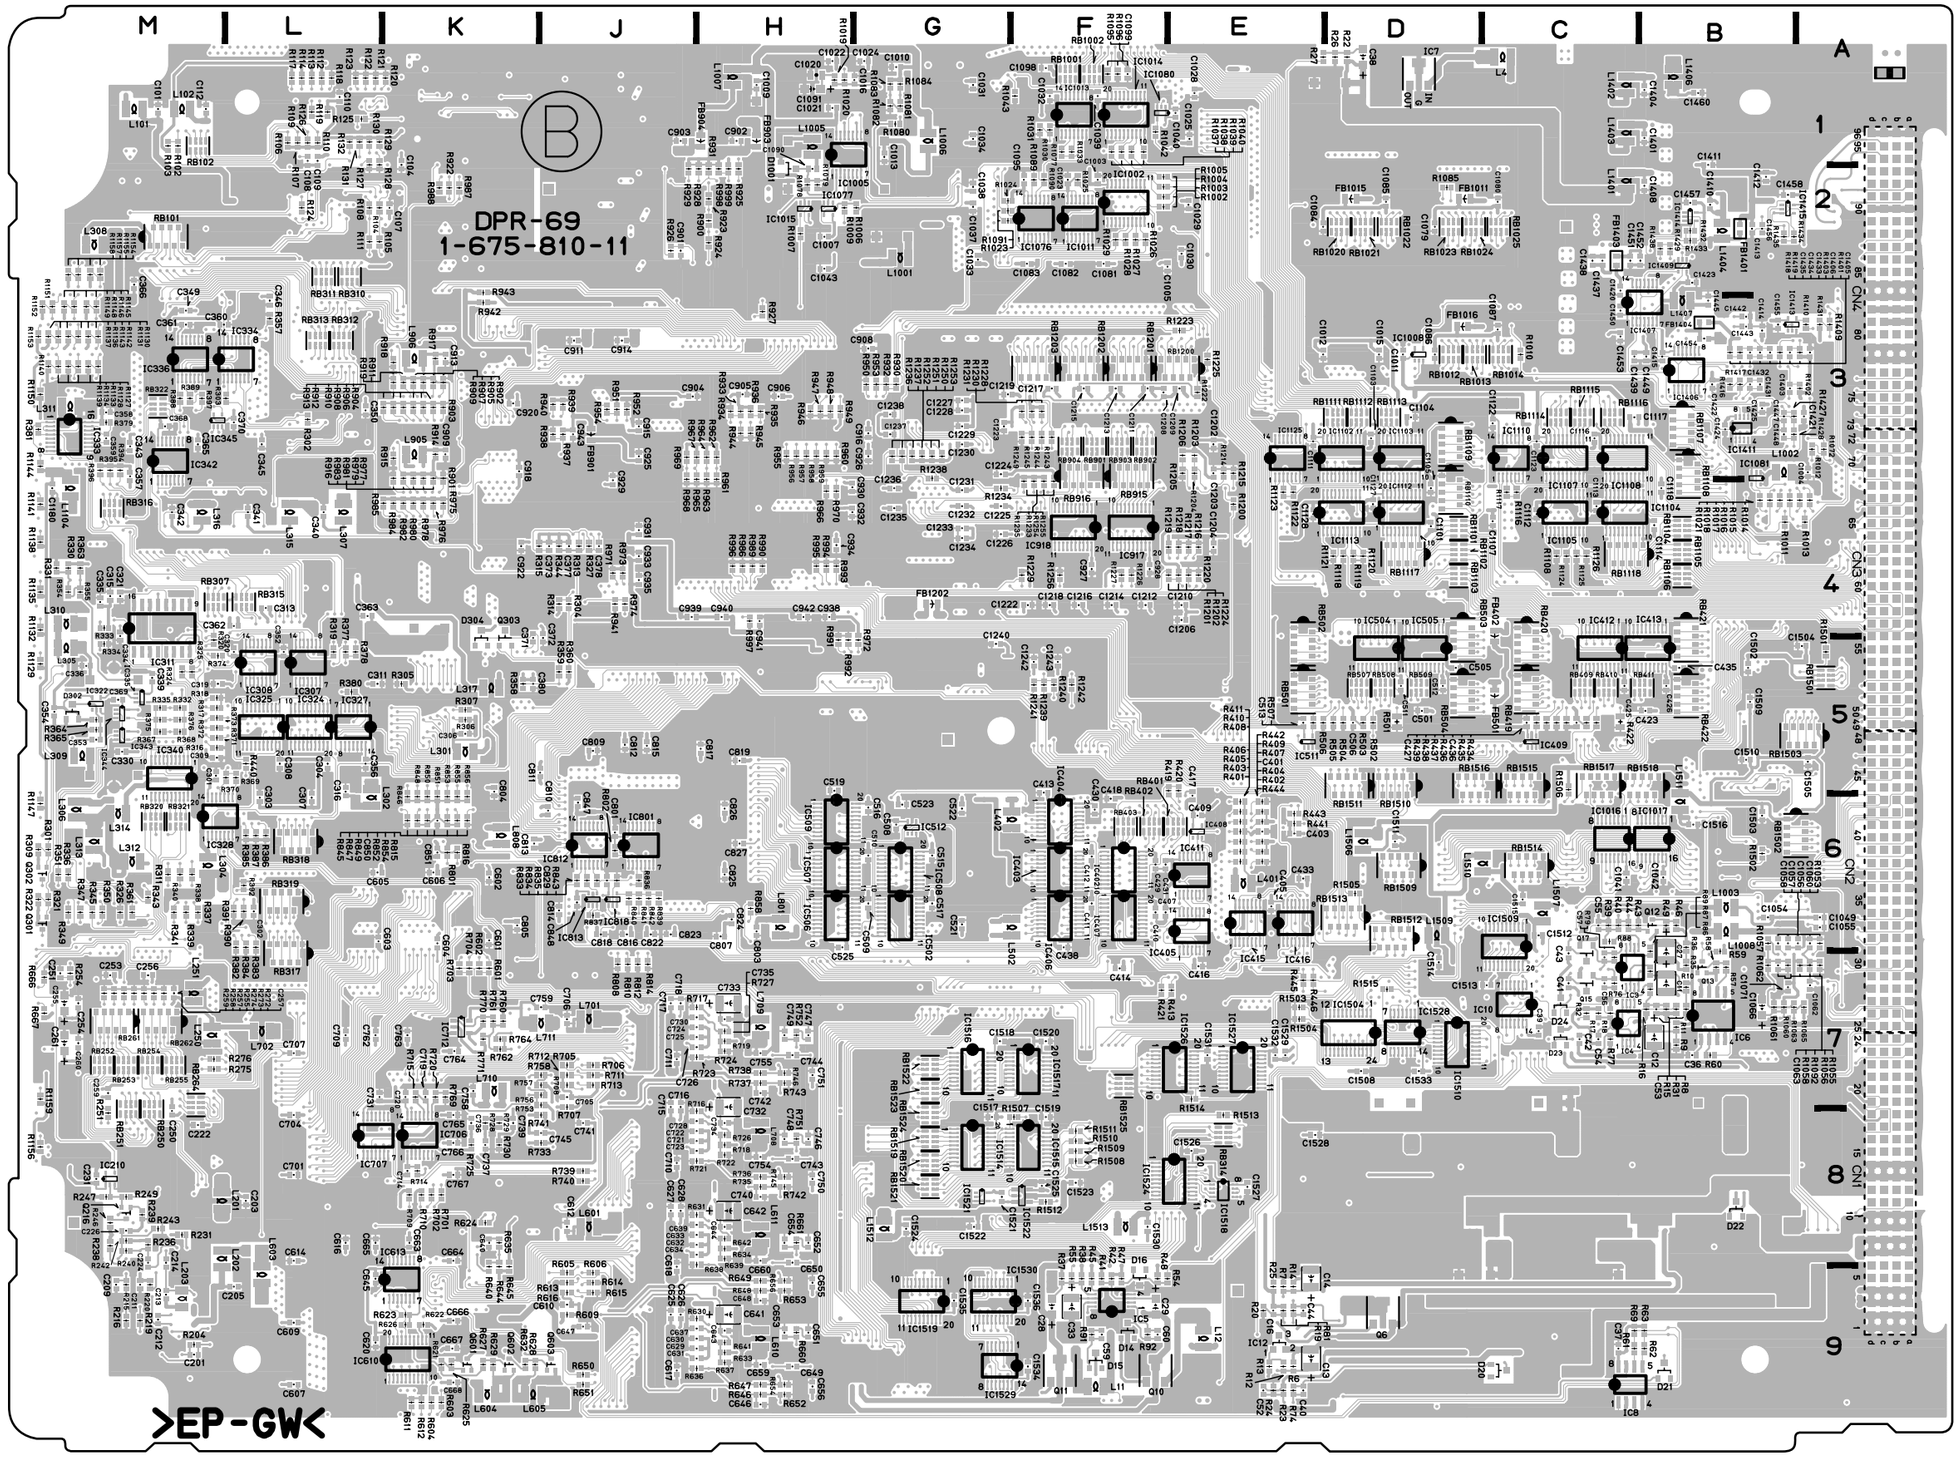

Components location list ; next page

DPR-69 -B SIDE-
SUFFIX: -11

DPR-69 (1-675-810-11)
---

*:B SIDE

C1	B9	C226	*M8	C377	*J4	C628	*J8	C750	*H8	C939	*J4	C1104	*D3	C1426	A2	D24	*C7	IC326	L6	IC912	K3	IC1518	*E8	L1402	*C1	R41	*F9	R229	M9	R368	*M5
C2	C1	C228	L8	C378	*J4	C629	*H9	C751	*H7	C940	*H4	C1105	*D4	C1427	A2	D201	M8	IC327	*L5	IC913	K4	IC1519	*G9	L1403	*C1	R42	*F9	R231	*M8	R369	*L5
C3	C9	C231	*M8	C379	J5	C630	*H9	C752	H8	C941	*H4	C1106	D4	C1428	B3	D301	M6	IC328	*M6	IC914	K2	IC1520	B5	L1404	*B2	R43	*C6	R235	M8	R370	*L5
C4	D9	C250	*M8	C380	*K5	C631	*H9	C753	H7	C942	*H4	C1107	*C4	C1429	B2	D302	*M5	IC329	K5	IC915	K2	IC1521	*G8	L1406	*B1	R44	*C6	R236	*M8	R371	*M5
C5	C8	C251	*M7	C381	M6	C632	*H8	C754	*H8	C943	*J3	C1108	C4	C1430	B2	D303	M6	IC330	M4	IC917	*F4	IC1522	*F8	L1407	*B3	R45	*F9	R238	*M8	R372	*M5
C6	B8	C252	M7	C401	*E6	C633	*H8	C755	*H7	C944	J3	C1109	E3	C1431	*B3	D304	*K5	IC331	L3	IC918	*F4	IC1523	G8	L1506	*D6	R46	*B6	R239	*M8	R373	*M5
C7	B7	C253	*M7	C402	E6	C634	*H8	C756	H8	C967	K1	C1110	D3	C1432	*B3	D1001	*H2	IC332	L3	IC933	K1	IC1524	*F8	L1507	*C6	R47	*F9	R240	*M8	R374	*M5
C8	B7	C254	*M7	C403	*E6	C635	K8	C757	H7	C968	K4	C1111	*E3	C1433	*B3	D1104	M5	IC333	*M3	IC934	K1	IC1525	E8	L1509	*D6	R48	*F9	R242	*M8	R375	*M5
C9	C7	C255	*M7	C404	E6	C636	H9	C758	*K7	C969	H1	C1112	*C4	C1434	*B3	D1105	M4	IC334	*M3	IC935	K2	IC1526	*F7	L1510	*C6	R49	*B6	R243	*M8	R376	*M5
C10	C7	C256	*M7	C405	*E6	C637	*H9	C759	*J7	C970	J1	C1113	*C4	C1435	*B3	D1106	M4	IC335	*M5	IC936	K4	IC1527	*E7	L1511	*B6	R50	E9	R246	*M8	R377	*L5
C11	*B7	C257	*M7	C406	E6	C638	H8	C760	K7	C1002	B3	C1114	*B4	C1437	*C2	D1107	M4	IC336	*M3	IC937	J3	IC1528	*D7	L1512	*G8	R52	B7	R247	*M8	R378	*L5
C12	*B7	C258	M7	C407	*F6	C639	*H8	C761	K7	C1003	*F2	C1115	C3	C1438	*C2	D1108	M4	IC337	M6	IC1001	D2	IC1529	*F9	L1513	*F8	R54	*F9	R249	*M8	R379	*M3
C13	*E9	C259	*M7	C408	C4	C640	*K8	C762	*L7	C1004	*A3	C1116	*C3	C1439	*C3	D1109	M3	IC338	M6	IC1002	*F2	IC1530	*F9			R55	*F9	R251	*M8	R380	*L5
C14	*E9	C260	*M7	C409	*E6	C641	*H9	C763	*K7	C1005	*F2	C1117	*C3	C1442	*B3	D1110	M6	IC339	M6	IC1003	D2			Q1	D9	R56	B7	R252	L7	R381	*M3
C15	D9	C261	*M7	C410	*F6	C642	*H8	C764	*K7	C1006	B3	C1118	*B4	C1443	*B3	D1111	M3	IC340	*M5	IC1004	D2	L1	C9	Q2	C9	R57	*B7	R253	L7	R382	*L6
C16	*E9	C262	A9	C411	*F6	C643	*H9	C765	*K8	C1007	*H2	C1119	C4	C1444	B3	D1112	M3	IC342	*M4	IC1005	*H2	L2	D9	Q4	C8	R58	*B7	R254	*M7	R383	*L6
C17	C8	C263	M9	C412	*F6	C644	*H8	C766	*K8	C1008	H2	C1120	C3	C1445	*B3	D1113	M8	IC343	*M5	IC1006	G1	L3	B9	Q5	B8	R59	*B7	R255	*M7	R384	*L6
C18	B8	C264	M9	C413	*F5	C645	*L9	C767	*K8	C1009	*H1	C1121	C3	C1447	*B3	D1114	M7	IC344	*M5	IC1007	C2	L4	*C1	Q6	*D9	R60	*B7	R257	*M7	R385	*L6
C19	D9	C301	*M5	C414	*F7	C646	*H9	C768	J7	C1010	*G1	C1122	*C3	C1448	*B3	D1401	B3	IC345	*M3	IC1008	*D3	L5	C7	Q9	D8	R61	*C9	R258	*M7	R386	*L6
C20	C9	C302	*L6	C415	F6	C647	*J9	C801	*J6	C1011	*D3	C1123	*C3	C1449	*B3	D1402	B3	IC348	J5	IC1009	A4	L6	C8	Q10	*F9	R62	*B9	R259	*M7	R387	*L6
C21	D1	C303	*L6	C416	*E7	C648	*H9	C802	K5	C1012	*E3	C1124	C3	C1450	*C3			IC349	J4	IC1010	G1	L7	C7	Q11	*F9	R63	*B9	R271	A9	R388	*M3
C22	D8	C304	*L5	C417	*E6	C649	*H9	C803	*H6	C1013	*G1	C1125	B4	C1451	*C2	E1	A9	IC401	E6	IC1011	*F2	L8	B8	Q12	*B6	R65	A8	R272	*M7	R389	*M3
C23	F9	C305	L6	C418	*F6	C650	*H8	C804	*K5	C1014	G2	C1126	A4	C1452	*B2	E2	A1	IC402	*F6	IC1012	F2	L9	B7	Q13	*B7	R66	A8	R273	*M7	R390	*L6
C24	F9	C306	*K5	C419	E7	C651	*H9	C805	*K6	C1015	*D3	C1127	*D4	C1453	*C3	E201	M9	IC403	*F6	IC1013	*F1	L10	B7	Q15	*C7	R69	*C9	R274	*M7	R391	*L6
C25	F9	C307	*L6	C423	*B5	C652	*H8	C806	H5	C1016	*G1	C1128	*E4	C1454	*B3	E301	M4	IC404	*F6	IC1014	*F1	L11	*F9	Q17	*C7	R71	A8	R275	*M7	R392	*L6
C26	E9	C308	*L5	C424	C4	C653	*H9	C807	*H6	C1020	*H1	C1180	*M4	C1455	*B3	E302	G5	IC405	*E6	IC1015	*H2	L12	*E9	Q205	M9	R72	A8	R276	*M7	R394	*M3
C27	*B7	C309	*M5	C425	*C5	C654	*H8	C808	K6	C1021	*H1	C1181	M4	C1456	*B2	E303	M2	IC406	*F6	IC1016	*C6	L13	B7	Q206	M8	R74	*E9	R301	*M6	R395	*M3
C28	*F9	C310	M5	C426	*B5	C655	*H9	C809	*J5	C1022	*H1	C1202	*E3	C1457	*B2	E601	K8	IC407	*F6	IC1017	*B6	L15	D8	Q209	M8	R75	C7	R302	*L3	R396	*M3
C29	*F9	C311	*L5	C427	*C5	C656	*H9	C810	*J6	C1023	*F2	C1203	*E3	C1458	*B2	E1001	H2	IC408	*E6	IC1022	B6	L101	*M1	Q211	M8	R76	*C7	R303	*L3	R397	*M3
C30	D8	C312	L4	C428	C4	C657	H9	C811	*J5	C1024	*G1	C1204	*E4	C1459	B1			IC409	*C5	IC1026	B7	L102	*M1	Q213	M8	R77	*C7	R304	*J4	R401	*E6
C31	F9	C313	*L4	C429	*F6	C658	H9	C812	*J5	C1025	*E1	C1205	E5	C1460	*B1	FB402	*C4	IC410	F6	IC1037	D2	L201	*M8	Q216	*M8	R79	*C7	R305	*K5	R402	*E6
C32	F9	C314	M4	C430	*F6	C659	*H9	C813	*K6	C1026	G1	C1206	*E4	C1502	*B5	FB501	*C5	IC411	*E6	IC1038	C2	L202	*M8	Q301	*M6	R80	C7	R306	*K5	R403	*E6
C33	*F9	C315	*M4	C431	*F6	C660	*H8	C814	*J6	C1027	E2	C1207	E3	C1503	*B6	FB901	*J3	IC412	*C4	IC1040	C5	L203	*M9	Q302	*M6	R81	*E9	R307	*K5	R404	*E6
C34	B7	C316	*L5	C432	E6	C661	H9	C815	*J5	C1028	*E1	C1208	*F3	C1504	*A5	FB902	J2	IC413	*B4	IC1076	*F2	L250	*M7	Q303	*K5	R83	G9	R308	K5	R405	*E6
C35	B7	C317	M5	C433	*E6	C662	H8	C816	*J6	C1029	*E2	C1209	*E3	C1505	*A5	FB903	*H1	IC414	E6	IC1077	*H2	L251	*M7	Q601	*K9	R84	G9	R309	*M6	R406	*E6
C36	*B7	C318	L6	C434	C4	C663	*K8	C817	*H5	C1030	*E2	C1210	*E4	C1506	D7	FB904	*H1	IC415	*E6	IC1078	B7	L301	*K5	Q602	*K9	R85	G9	R310	M6	R407	*E6
C37	*C9	C319	*M5	C435	*B5	C664	*K8	C818	*J6	C1031	*G1	C1211	*F3	C1507	D7	FB905	J2	IC416	*E6	IC1080	*F1	L302	*L6	Q603	*J9	R86	*B7	R311	*M6	R408	*E6
C38	*D1	C320	*L5	C436	*C5	C665	*L8	C819	*H5	C1032	*F1	C1212	*F4	C1508	*D7	FB1011	*D2	IC417	E7	IC1081	*B3	L303	M4	Q701	J8	R87	*B7	R313	*J4	R409	*E6
C39	*C7	C321	*M4	C437	C4	C666	*K9	C820	H6	C1033	*G2	C1213	*F3	C1509	*B5	FB1015	*D2	IC418	E7	IC1082	E2	L304	*M6	Q702	J8	R88	*C6	R314	*J4	R410	*E6
C40	*E9	C322	M4	C438	*F6	C667	*K9	C821	H6	C1034	*G1	C1214	*F4	C1510	*B5	FB1016	*D3	IC419	C5	IC1083	D2	L305	*M5	Q703	J7	R89	*B7	R315	*K4	R411	*E6
C41	*C7	C323	M6	C501	*D5	C668	*K9	C822	*J6	C1035	E1	C1215	*F3	C1511	*D6	FB1101	C4	IC501	D5	IC1101	D4	L306	*M6	Q704	J7	R90	E9	R316	*M5	R413	*E7
C42	*C7	C324	M6	C502	D4	C669	J8	C823	*J6	C1036	G2	C1216	*F4	C1512	*C6	FB1103	C3	IC502	*G6	IC1102	*E3	L307	*L4	Q1101	M3	R91	*F9	R317	*M5	R414	F7
C43	*C7	C326	M6	C503	D4	C701	*L8	C824	*H6	C1037	*G2	C1217	*F3	C1513	*C7	FB1200	G3	IC503	G6	IC1103	*D3	L308	*M2	Q1102	M3	R92	*F9	R318	*M5	R415	F7
C44	*E9	C327	M6	C504	D4	C702	K8	C825	*H6	C1038	*G2	C1218	*F4	C1514	*D7	FB1201	G5	IC504	*D4	IC1104	*C4	L309	*M5	Q1103	M3	R102	*M1	R319	*L5	R416	F7
C45	D9	C330	*M5	C505	*D5	C704	*L8	C826	*H6	C1039	*F1	C1219	*G3	C1515	*C6	FB1202	*G4	IC505	*D4	IC1105	*C4	L310	*M4	Q1104	M3	R103	*M1	R320	*M5	R417	F7
C46	C9	C331	M4	C506	*D5	C705	*J7	C827	*H6	C1040	*E1	C1220	G3	C1516	*B6	FB1203	G3	IC506	*H6	IC1106	C4	L311	*M3	Q1105	M3	R104	*L2	R321	*M6	R418	F7
C47	C7	C332	M6	C507	C5	C706	*J7	C828	K6	C1041	*C6	C1221	G3	C1517	*G8	FB1401	*B2	IC507	*H6	IC1107	*C3	L312	*M6	Q1106	M3	R105	*L2	R322	*M6	R419	*E5
C48	D7	C333	M6	C508	*G6	C707	*L7	C829	*J6	C1042	*B6	C1222	*F4	C1518	*G7	FB1402	B2	IC508	*G6	IC1108	*C3	L313	*M6	Q1107	M2	R106	*L1	R323	M6	R420	*E5
C49	B7	C334	*M4	C509	*G6	C708	L7	C847	*J6	C1043	*H2	C1223	*G3	C1519	*F8	FB1403	*C2	IC509	*H6	IC1109	B4	L314	*M6	Q1108	M2	R107	*L1	R324	*M5	R421	*F7
C50	D1	C335	*M4	C510	*G6	C709	*L7	C848	*J6	C1044	H2	C1224	*G3	C1520	*F7	FB1404	*B3	IC511	*E5	IC1110	*C3	L315	*L4	Q1109	M2	R108	*L2	R325	*M5	R422	*C5
C51	D1	C336	*M5	C511	*D5	C710	*J8	C850	*K6	C1049	*A6	C1225	*G4	C1521	*G8			IC512	*G6	IC1111	A4	L316	*M4	Q1110	M2	R109	*L1	R326	*M6	R431	F7
C52	*E9	C337	M4	C512	*D5	C711	*J7	C851	*K6	C1050	B6	C1226	*G4	C1522	*G8	IC1	E9	IC601	K7	IC1112	*D4	L317	*K5	Q1111	M2	R110	*L1	R327	*J4	R432	F7
C53	*B7	C338	M6	C513	*E5	C712	J8	C901	*J2	C1054	*B6	C1227	*G3	C1523	*F8	IC2	E9	IC602	K7	IC1113	*E4	L401	*E6			R111	*L2	R328	M4	R434	*C5
C54	*C7	C339	*M5	C514	C5	C713	J7	C902	*H1	C1055	*A6	C1228	*G3	C1524	*G8	IC3	*C7	IC603	L7	IC1125	*E3	L402	*F6	R1	G9	R112	*L1	R329	M4	R435	*C5
C55	*C6	C340	*L4	C515	*G6	C714	*K8	C903	*J1	C1056	*A6	C1229	*G3	C1525	*F8	IC4	*C7	IC604	K6	IC1201	F4	L502	*F6	R2	G9	R113	*L1	R330	*M4	R436	*C5
C56	*C7	C341	*L4	C516	*G6	C715	*J7	C904	*J3	C1057	*B6	C1230	*G3	C1526	*E8	IC5	*F9	IC605	L6	IC1202	G3	L601	*J8	R3	G9	R114	*L1	R331	*M4	R437	*C5
C57	*C7	C342	*M4	C517	*G6	C716	*J7	C905	*H3	C1058	*B6	C1231	*G4	C1527	*E8	IC6	*B7	IC606	K6	IC1203	F5	L603	*L9	R4	G9	R115	K1	R332	*M5	R438	*C5
C58	E9	C343	*M3	C518	G7	C717	*J7	C906	*H3	C1059	B6	C1232	*G4	C1528	*E8	IC7	*D1	IC607	L9	IC1204	F5	L604	*K9	R5	G9	R116	L1	R333	*M4	R439	*C5
C59	*F9	C344	M2	C519	*H5	C718	*J7	C907	G3	C1060	*A6	C1233	*G4	C1529	*E7	IC8	*C9	IC608	J8	IC1401	A3	L605	*K9	R6	*E9	R117	*L1	R334	*M5	R440	*L5
C60	*F9	C345	*L3	C520	F6	C719	*K7	C908	*G3	C1061	A7	C1234	*G4	C1530	*F8	IC10	*C7	IC610	*K9	IC1402	B2	L610	*H9	R7	*E9	R118	*L1	R335	*M5	R441	*E6
C101	*M1	C346	*L3	C521	*G6	C720	*K7	C909	*K3	C1062	*A7	C1235	*G4	C1531	*E7	IC12	*E9	IC612	J9	IC1403	B2	L611	*H8	R8	*B7	R119	*L1	R336	*M6	R442	*E6
C102	M1	C347	L2	C522	*G6	C721	*H8	C910	J3	C1063	*B7	C1236	*G4	C1532	*E7	IC101	K1	IC613	*K9	IC1404	B2	L612	H9	R9	*B7	R120	*K1	R337	*M6	R443	*E6
C103	K1	C348	L3	C523	*G6	C722	*H8	C911	*J3	C1066	*B7	C1237	*G3	C1533	*D7	IC102	K2	IC614	J8	IC1405	B3	L613	H8	R10	*B7	R121	*L1	R338	*M6	R444	*E6
C104	*K1	C349	*M3	C524	H6	C723	*H8	C912	J3	C1069	A7	C1238	*G3	C1534	*F9	IC103	K2	IC617	K9	IC1406	*B3	L617	H9	R11	*B7	R122	*L1	R339	*M6	R445	*E7
C105	L2	C350	*L3	C525	*H6	C724	*H7	C913	*K3	C1070	B7	C1239	G4	C1535	*G9	IC104	L2	IC618	J9	IC1407	*C3	L618	H9	R12	*E9	R123	*L1	R340	*M6	R446	*E7
C106	L2	C351	L2	C601	*K6	C725	*H7	C914	*J3	C1071	*B7	C1240	*G5	C1536	*F9	IC105	L1	IC619	H9	IC1408	B3	L701	*J7	R13	*E9	R124	*L2	R341	*M6	R501	*D5
C107	*K2	C352	*L5	C602	*K6	C726	*H7	C915	*J3	C1072	B7	C1241	G5			IC107	L2	IC620	H9	IC1409	*B2	L702	*L7	R14	*E9	R125	*L1	R342	J4	R502	*D5
C108	*L1	C353	*M5	C603	*L6	C727	H8	C916	*G3	C1073	B7	C1242	*F5	CN1	A8	IC108	L2	IC701	L8	IC1410	B3	L705	H8	R15	*B7	R126	*L1	R343	*M6	R503	*D5
C109	*L1	C354	*M5	C604	*K6	C728	*H8	C917	K1	C1079	*D2	C1243	*F5	CN2	A6	IC201	M9	IC703	J7	IC1411	*B3	L706	H7	R16	*B7	R127	*L1	R344	*J4	R504	*D5
C110	*L1	C355	K4	C605	*L6	C729	H7	C918	*K3	C1080	*C2	C1401	*B1	CN3	A4	IC208	M9	IC704	J8	IC1412	B3	L707	K8	R17	*C7	R128	*L1	R345	*M6	R505	*D5
C111	M1	C356	*L5	C606	*K6	C730	*H7	C919	K1	C1081	*F2	C1402	C1	CN4	A2	IC210	*M8	IC705	J7	IC1413	*B3	L708	*H8	R18	*C7	R129	*L1	R346	M6	R506	*E5
C112	*M1	C357	*M3	C607	*L9	C731	*L7	C920	*K3	C1082	*F2	C1403	*B3	CN6	M1	IC250	M8	IC706	*K8	IC1414	*B2	L709	*H7	R19	*E9	R130	*L1	R347	*M6	R507	*E5
C201	*M9	C358	*M3	C608	K9	C732	*H7	C921	K3	C1083	*F2	C1404	*B1			IC251	M7	IC707	*L8	IC1415	*B2	L710	*K7	R20	*E9	R131	*L1	R348	M6	R508	G7
C202	L8	C359	*M3	C609	*L9	C733	*H7	C922	*K4	C1084	*E2	C1405	*A3	D1	G9	IC301	L6	IC708	J8	IC1501	B6	L711	*J7	R21	C1	R132	*L1	R349	*M6	R509	G7
C203	*L8	C360	*M3	C610	*J9	C734	*H8	C923	K2	C1085	*D2	C1406	*B3	D2	G9	IC302	L6	IC709	H8	IC1502	A6	L712	H8	R22	*D1	R201	A9	R350	*M6	R510	G7
C204	M8	C361	*M3	C612	*J8	C735	*H7	C924	K2	C1086	*D3	C1407	C1	D3	G9	IC307	*L5	IC710	H7	IC1503	A5	L713	H7	R23	*E9	R202	M9	R351	*M6	R511	G7
C205	*L9	C362	*L4	C614	*L8	C736	*K8	C925	*J3	C1087	*C3	C1408	*B2	D4	G9	IC308	*L5	IC711	K7	IC1504	*D7	L801	*H6	R24	*E9	R203	M9	R353	J4	R512	G7
C206	M9	C363	*L4	C615	L9	C737	*K8	C926	*G3	C1088	G1	C1409	C2	D5	G9	IC309	L5	IC712	*K7	IC1505	B5	L808	*K6	R25	*E9	R204	*M9	R354	*M4	R513	G7
C208	M9	C364	M3	C616	*L8	C738	K8	C927	*F4	C1090	*H2	C1410	*B2	D6	C1	IC311	*M5	IC801	*J6	IC1506	B6	L905	*K3	R26	*D1	R205	M9	R355	*M4	R514	G7
C209	*M9	C365	*M3	C617	*J9	C739	*K8	C928	*F4	C1091	*H1	C1411	*B1	D11	E9	IC314	M4	IC802	J6	IC1507	C7	L906	*K3	R27	*E1	R214	M9	R356	M5	R601	*K7
C210	M9	C366	*M2	C618	*J9	C740	*H8	C929	*J4	C1092	C5	C1412	*B2	D14	*F9	IC315	M4	IC803	K6	IC1508	D6	L1001	*G2	R31	*B7	R215	*M9	R357	*L3	R602	*K7
C211	*M9	C367	M6	C619	K9	C741	*J8	C930	*H4	C1094	H1	C1413	*B2	D15	*F9	IC316	L4	IC812	*J6	IC1509	*C6	L1002	*B3	R32	*C7	R216	*M9	R358	*K5	R603	*K9
C212	*M9	C368	*M3	C620	*L9	C742	*H7	C931	*J4	C1095	*F2	C1414	*B3	D16	*F9	IC317	M4	IC813	*J6	IC1510	*D7	L1003	*B6	R33	E9	R217	M9	R359	*J5	R604	*K9
C213	*M9	C369	*M5	C621	J9	C743	*H8	C932	*H4	C1096	G2	C1415	*B3	D17	G9	IC318	M4	IC818	*J6	IC1511	D7	L1004	B7	R34	E9	R218	M9	R360	*J5	R605	*J9
C214	*M8	C370	*L3	C622	J9	C744	*H7	C933	*J4	C1097	B7	C1420	*C2	D18	G9	IC319	M3	IC901	H2	IC1512	C6	L1005	*H1	R35	*B7	R219	*M9	R361	*M6	R606	*J9
C215	M9	C371	*K5	C623	K9	C745	*J8	C934	*H4	C1098	*F1	C1421	*A3	D19	G9	IC321	L2	IC902	H4	IC1513	C6	L1006	*G1	R36	*B6	R220	*M9	R362	J4	R609	*J9
C216	M9	C372	*J5	C624	K9	C746	*H8	C935	*J4	C1099	*F1	C1422	*B3	D20	*C9	IC322	*M5	IC905	K3	IC1514	*G8	L1007	*H1	R37	*F9	R221	M9	R363	*M4	R611	*K9
C220	M8	C373	*J4	C625	*J9	C747	*H7	C936	J4	C1101	*D4	C1423	*B2	D21	*B9	IC323	L6	IC906	K3	IC1515	*G8	L1008	*B6	R38	*F9	R222	M9	R364	*M5	R612	*K9
C222	*M8	C374	J4	C626	*J9	C748	*H8	C937	H4	C1102	D3	C1424	*B3	D22	*B8	IC324	*L5	IC909	K4	IC1516	*G7	L1104	*M4	R39	*C6	R223	M9	R365	*M5	R613	*J9
C224	*M8	C375	J4	C627	*J8	C749	*H7	C938	*H4	C1103	*D3	C1425	*B3	D23	*C7	IC325	*L5	IC911	K3	IC1517	*G7	L1401	*C2	R40	*C6	R228	M8	R367	*M5	R614	*J9

R615	*J9	R747	H8	R931	*H2	R1025	*F2	R1145	*M3	R1432	*B2	RB919	J5	TP1	C9
R616	*J9	R748	H7	R932	*G3	R1026	*F2	R1146	*M3	R1433	*B2	RB920	J5	TP201	M9
R621	*K9	R751	*H8	R933	*H3	R1027	*F2	R1147	*M6	R1434	*B2	RB921	J2	TP202	M8
R622	*K9	R752	*H7	R934	*H3	R1028	*F2	R1148	*M3	R1435	*B2	RB1001	*F1	TP203	M8
R623	*K9	R753	*J7	R935	*H3	R1029	*F2	R1149	*M3	R1436	B2	RB1002	*F1	TP250	M8
R624	*K8	R754	H8	R936	*H3	R1030	*F1	R1150	*M3	R1437	B2	RB1012	*D3	TP251	M8
R625	*K9	R755	H7	R937	*J3	R1031	*F1	R1151	*M3	R1438	*B2	RB1013	*D3	TP252	L9
R626	*K9	R756	*J7	R938	*J3	R1033	*F1	R1152	*M3	R1501	*A5	RB1014	*C3	TP253	M8
R627	*K9	R757	*J7	R939	*J3	R1034	E2	R1153	*M3	R1502	*B6	RB1020	*D2	TP254	M8
R628	*K9	R758	*J7	R940	*J3	R1037	*F1	R1154	*M2	R1503	*E7	RB1021	*D2	TP255	M8
R629	*K9	R759	K7	R941	*J4	R1038	*F1	R1155	*M2	R1504	*E7	RB1022	*D2	TP256	M8
R630	*H9	R760	*K7	R942	*K3	R1039	*F1	R1156	*M8	R1505	*D6	RB1023	*D2	TP301	L4
R631	*H8	R761	*K7	R943	*K2	R1040	*F1	R1157	*M2	R1506	*C5	RB1024	*D2	TP302	L4
R632	*K9	R762	*K7	R944	*H3	R1042	*F1	R1158	*M2	R1507	*F8	RB1025	*C2	TP303	M4
R633	*H9	R764	*K7	R945	*H3	R1043	*F1	R1159	*M7	R1508	*F8	RB1101	*D4	TP304	M5
R634	*H8	R765	H8	R946	*H3	R1050	B7	R1200	*E4	R1509	*F8	RB1102	*D4	TP305	L4
R635	*K8	R766	H7	R947	*H3	R1051	B7	R1201	*E4	R1510	*F8	RB1103	*D4	TP306	L4
R636	*H9	R769	*K7	R948	*H3	R1053	*A6	R1202	*E4	R1511	*F8	RB1104	*B4	TP307	L4
R637	*H9	R770	*K7	R949	*H3	R1055	*A7	R1203	*E3	R1512	*F8	RB1105	*B4	TP308	M3
R638	*H8	R771	*K7	R950	*G3	R1056	*A7	R1204	*E3	R1513	*E8	RB1106	*B4	TP601	H8
R639	*H8	R801	*K6	R951	*J3	R1057	*B6	R1205	*E3	R1514	*E7	RB1107	*B3	TP602	H9
R640	*K9	R802	*J6	R952	*J3	R1058	*B7	R1206	*E3	R1515	*D7	RB1108	*B3	TP603	K8
R641	*H9	R803	J7	R953	*G3	R1060	*B7	R1214	*E3			RB1109	*D3	TP701	H8
R642	*H8	R804	J7	R954	*J3	R1061	*B7	R1215	*E3	RB101	*M2	RB1110	*D4	TP702	H7
R644	*K9	R805	J7	R955	*H3	R1062	*B7	R1216	*E4	RB102	*M1	RB1111	*D3	TP703	K7
R645	*K9	R806	J7	R956	*H3	R1063	*B7	R1217	*E4	RB250	*M8	RB1112	*D3	TP1001	H2
R646	*H9	R807	J7	R957	*H3	R1065	*A7	R1218	*E4	RB251	*M8	RB1113	*D3	TP1005	E2
R647	*H9	R808	*J7	R958	*H3	R1072	*A3	R1219	*E4	RB252	*M7	RB1114	*C3	TP1006	A7
R648	*H9	R809	J7	R959	*H3	R1077	*F1	R1220	*E4	RB253	*M7	RB1115	*C3	TP1401	C2
R649	*H9	R810	*J7	R960	*H3	R1078	*H2	R1222	*E3	RB254	*M7	RB1116	*C3		
R650	*J9	R811	J7	R961	*H3	R1079	*H2	R1223	*E3	RB255	*M7	RB1117	*D4	X301	M5
R651	*J9	R812	*J7	R962	*H3	R1080	*G1	R1224	*E4	RB261	*M7	RB1118	*C4	X1001	H1
R652	*H9	R813	J7	R963	*H3	R1081	*G1	R1225	*E3	RB262	*M7	RB1200	*E3		
R653	*H9	R814	*J7	R964	*H3	R1082	*G1	R1226	*F4	RB263	M7	RB1201	*F3		
R654	*H9	R815	*K6	R965	*H3	R1083	*G1	R1227	*F4	RB264	*M7	RB1202	*F3		
R655	H8	R816	*K6	R966	*H4	R1084	*G1	R1228	*F3	RB301	L6	RB1203	*F3		
R656	*H9	R833	*J6	R967	*H3	R1085	*D2	R1229	*F4	RB302	L6	RB1204	E3		
R657	H9	R834	*J6	R968	*J3	R1086	D2	R1230	*F3	RB303	L6	RB1401	B1		
R660	*H9	R835	*J6	R969	*J3	R1087	D2	R1231	*F3	RB304	L7	RB1402	B1		
R661	*H8	R836	*J6	R970	*H4	R1088	D3	R1233	*F4	RB305	L7	RB1403	B2		
R662	H9	R837	*J6	R971	*J4	R1089	*F2	R1234	*G4	RB306	L7	RB1404	B2		
R663	H8	R839	*J6	R972	*G5	R1090	*F2	R1235	*F4	RB307	*M4	RB1405	B2		
R664	H9	R840	*J6	R973	*J4	R1091	*G2	R1236	*G3	RB310	*L2	RB1406	C3		
R665	H8	R841	*J6	R974	*J4	R1092	*A7	R1237	*G3	RB311	*L2	RB1407	C3		
R666	*M7	R842	*J6	R975	*K4	R1095	*F1	R1238	*G3	RB312	*L3	RB1408	C2		
R667	*M7	R843	*J6	R976	*K4	R1096	*F1	R1239	*F5	RB313	*L3	RB1409	C2		
R701	*K8	R845	*K6	R977	*K3	R1101	D4	R1240	*F5	RB314	*E8	RB1410	C2		
R702	*K8	R846	*K6	R978	*K4	R1102	D4	R1241	*F5	RB315	*L4	RB1501	*A5		
R703	*K7	R847	*K6	R979	*K3	R1103	D4	R1242	*F5	RB316	*M4	RB1502	*B6		
R704	*K7	R848	*K6	R980	*K4	R1104	D4	R1243	*F3	RB317	*L7	RB1503	*A5		
R705	*J7	R849	*K6	R981	*K3	R1105	D4	R1244	*F3	RB318	*L6	RB1504	A6		
R706	*J7	R850	*K6	R982	*K4	R1106	D4	R1245	*F3	RB319	*L6	RB1505	A6		
R707	*J7	R851	*K6	R983	*K3	R1107	E4	R1246	E4	RB320	*M6	RB1506	B5		
R708	*J7	R852	*K6	R984	*K4	R1108	*C4	R1247	E4	RB321	*M6	RB1507	A5		
R709	*K8	R853	*K6	R985	*K4	R1109	C4	R1248	E4	RB322	*M3	RB1508	A5		
R710	*K8	R854	*K6	R986	*H4	R1110	C4	R1249	*F3	RB401	*E6	RB1509	*D6		
R711	*J7	R855	*K6	R987	*K2	R1111	C4	R1250	*G3	RB402	*F6	RB1510	*D5		
R712	*J7	R856	*K6	R988	*K2	R1112	C4	R1251	*G3	RB403	*F6	RB1511	*D5		
R713	*J7	R858	*H6	R989	*H4	R1113	C4	R1252	*G3	RB404	F7	RB1512	*D6		
R714	*K8	R900	*H2	R990	*H4	R1114	C4	R1253	*G3	RB405	F7	RB1513	*D6		
R715	*K7	R901	*K3	R991	*H5	R1115	C4	R1254	*F4	RB409	*C5	RB1514	*C6		
R716	*H8	R902	*K3	R992	*H5	R1116	*C4	R1255	*F4	RB410	*C5	RB1515	*C5		
R717	*H7	R903	*K3	R993	*H4	R1117	*C4	R1256	*F4	RB411	*B5	RB1516	*D5		
R718	*H8	R904	*K3	R994	*H4	R1118	*D4	R1401	*A3	RB419	*C5	RB1517	*C5		
R719	*H7	R905	*K3	R995	*H4	R1119	*D4	R1402	*A3	RB420	*C5	RB1518	*B5		
R720	*K7	R906	*K3	R996	*H4	R1120	*D4	R1403	*B3	RB421	*B5	RB1519	*G8		
R721	*H8	R907	*K3	R997	*H4	R1121	*D4	R1405	A2	RB422	*B5	RB1520	*G8		
R722	*H8	R908	*K3	R998	*H2	R1122	*E4	R1406	A2	RB501	*E5	RB1521	*G8		
R723	*H7	R909	*K3	R999	*H2	R1123	*E4	R1407	A2	RB502	*E5	RB1522	*G7		
R724	*H7	R910	*K3	R1002	*F2	R1124	*C4	R1408	A2	RB503	*D5	RB1523	*G7		
R725	*K8	R911	*K3	R1003	*F2	R1125	*C4	R1409	*A3	RB504	*D5	RB1524	*G8		
R726	*H8	R912	*K3	R1004	*F2	R1126	*C4	R1410	*A3	RB505	H7	RB1525	*F7		
R727	*H7	R913	*K3	R1005	*F2	R1127	*M3	R1411	A2	RB506	G7				
R728	*K8	R914	*K3	R1006	*G2	R1128	*M3	R1412	B3	RB507	*D5	RV301	M4		
R729	*K8	R915	*K3	R1007	*H2	R1129	*M5	R1413	A2	RB508	*D5	RV601	M7		
R730	*K8	R916	*K3	R1009	*H2	R1130	*M3	R1414	A2	RB509	*D5	RV602	M7		
R733	*J8	R917	*K3	R1010	*C3	R1131	*M3	R1415	A2	RB801	J7				
R734	J8	R918	*K3	R1011	*B4	R1132	*M4	R1416	*B3	RB802	J7	S101	M2		
R735	*H8	R919	*K3	R1012	*A3	R1133	*M3	R1417	*B3	RB803	H7	S601	J9		
R736	*H8	R920	K4	R1013	*A4	R1134	*M3	R1418	*B3	RB804	H7				
R737	*H7	R921	K4	R1014	*A4	R1135	*M4	R1419	*B3	RB901	*F3	THP1	C9		
R738	*H7	R922	*K2	R1015	*A4	R1136	*M3	R1420	B2	RB902	*F3	THP2	B9		
R739	*J8	R923	*H2	R1016	*B4	R1137	*M3	R1421	B2	RB903	*F3	THP3	F9		
R740	*J8	R924	*H2	R1017	*B4	R1138	*M4	R1422	B3	RB904	*F3	THP4	B9		
R741	*J8	R925	*H2	R1018	*B4	R1139	*M3	R1426	B3	RB905	G5	THP5	E9		
R742	*H8	R926	*J2	R1019	*H1	R1140	*M3	R1427	*B3	RB906	H5	THP6	C1		
R743	*H7	R927	*H3	R1020	*H1	R1141	*M4	R1428	*B3	RB915	*F3	THP7	D8		
R744	K7	R928	*H2	R1021	*B4	R1142	*M3	R1429	*B2	RB916	*F3	THP8	B8		
R745	*H8	R929	*J2	R1023	*G2	R1143	*M3	R1430	B3	RB917	H5	THP9	A8		
R746	*H7	R930	*G3	R1024	*G2	R1144	*M3	R1431	*A3	RB918	H5				

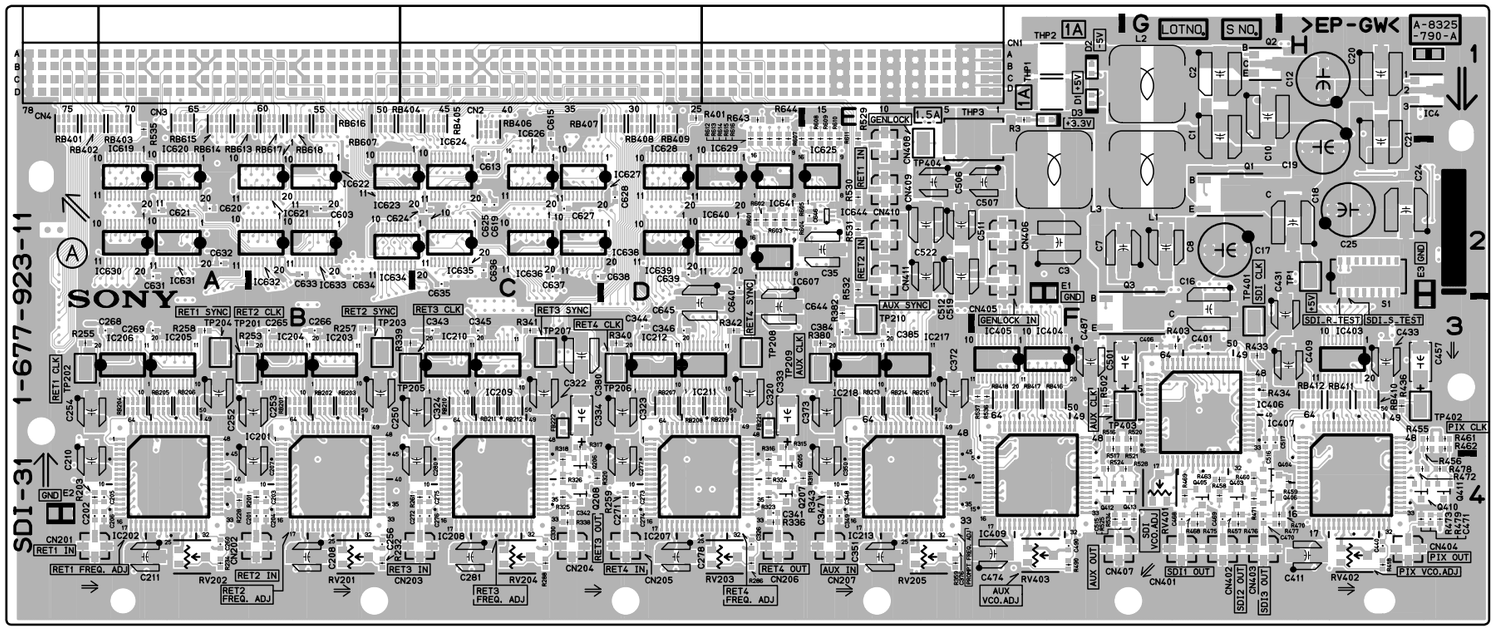

SDI-31 -A SIDE-
SUFFIX: -11

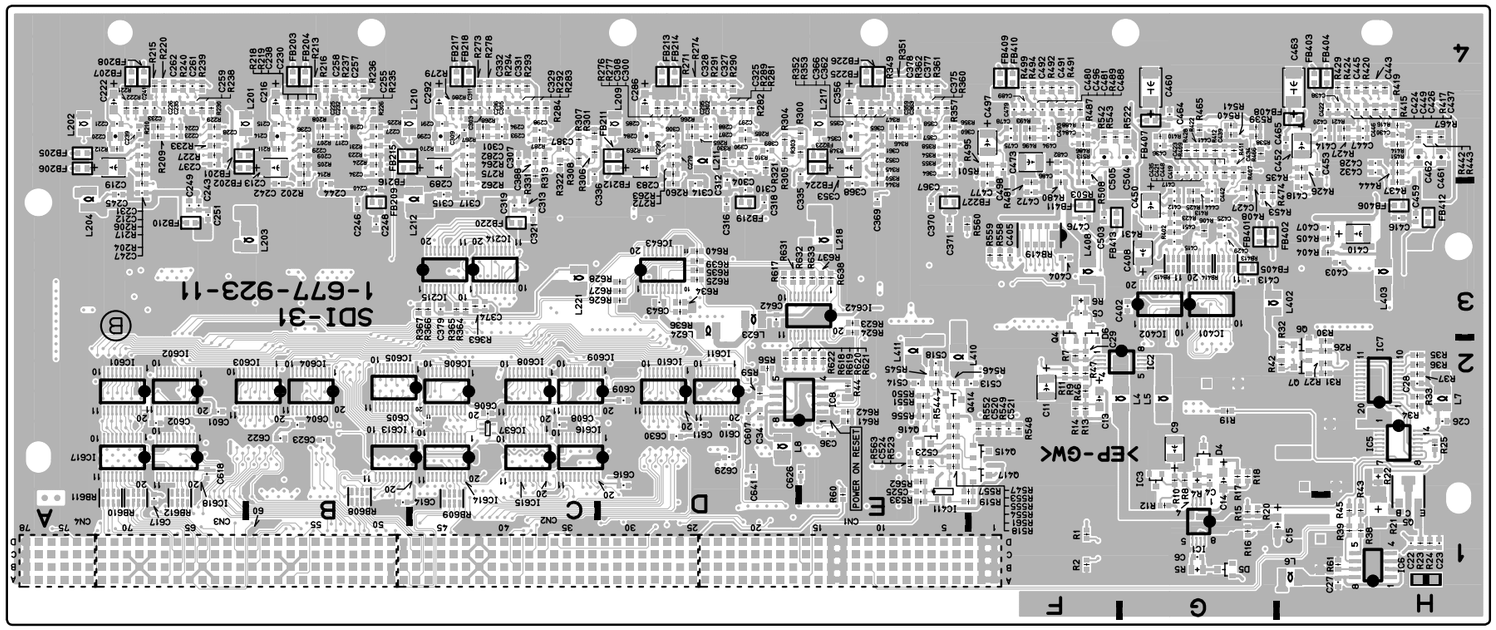

CCU-900 (UC) : S/N 10001 and Higher
CCU-900 (J) : S/N 30001 and Higher
CCU-900P (CE) : S/N 40001 and Higher

SDI-31 -B SIDE-
SUFFIX: -11

SDI-31 (1-677-923-11)
---

*:B SIDE

C1	G1	C259	*A4	C357	*E4	C465	*H4	C642	*D3	IC202	A4	L408	*F3	R214	*B4	R331	*C4	R472	H4	R619	*D2	TP203	B3
C2	G1	C260	A4	C358	*E4	C468	G4	C643	*D3	IC203	B3	L410	*E2	R215	*A4	R336	D4	R473	H4	R620	*E2	TP204	A3
C3	F2	C261	*A4	C359	*E4	C469	G4	C644	D3	IC204	B3	L411	*E2	R216	*B4	R338	C4	R474	*G3	R621	*E2	TP205	B3
C4	*G2	C262	*A4	C360	*E4	C470	G4	C645	D3	IC205	A3	L623	*D3	R217	*A4	R339	B3	R475	G4	R622	*E2	TP206	D3
C5	*F3	C265	B3	C361	*E4	C471	H4	C646	E2	IC206	A3	L624	*D3	R218	*B4	R340	D3	R476	G4	R623	*E3	TP207	C3
C6	*G1	C266	B3	C362	*E4	C472	*F3			IC207	D4			R219	*B4	R341	C3	R477	G4	R624	*E3	TP208	D3
C7	G2	C268	A3	C363	*E4	C473	*F4	CN1	E1	IC208	C4	Q1	G2	R220	*A4	R342	D3	R478	H4	R625	*D3	TP209	E3
C8	G2	C269	A3	C364	*E4	C474	F4	CN2	C1	IC209	C3	Q2	G1	R221	*A4	R343	E4	R479	H4	R626	*D3	TP210	E3
C9	*G2	C271	D4	C365	*E4	C475	*F4	CN3	B1	IC210	C3	Q3	G3	R222	*A4	R344	*E3	R480	*F3	R627	*D3	TP401	G3
C10	G1	C272	C4	C366	*E4	C476	*F3	CN4	A1	IC211	D3	Q4	*F3	R223	*B4	R345	*E4	R481	*F3	R628	*D3	TP402	H3
C11	*F2	C273	D4	C367	*E3	C477	*F3	CN201	A4	IC212	D3	Q5	*H2	R224	*B4	R346	*E4	R486	*F4	R631	*D3	TP403	G3
C12	H1	C274	D4	C368	*E3	C478	*F4	CN202	B4	IC213	E4	Q6	*H2	R225	*B4	R347	*E4	R487	*F4	R632	*E3	TP404	E2
C13	*F2	C275	C4	C369	*E3	C479	*F4	CN203	C4	IC214	*C3	Q7	*H2	R226	*B4	R348	*E4	R488	*F4	R633	*E3		
C14	*G2	C276	C4	C370	*E3	C480	*F4	CN204	C4	IC215	*C3	Q205	D4	R227	*A4	R349	*E4	R489	*F4	R634	*D3		
C15	*H1	C277	D4	C371	*E3	C481	*F4	CN205	D4	IC217	E3	Q206	C4	R228	A4	R350	*E4	R490	F4	R635	*D3		
C16	G3	C278	D4	C372	E3	C482	*F4	CN206	D4	IC218	E3	Q207	D4	R229	*A4	R351	*E4	R491	*F4	R636	*D3		
C17	G2	C279	*D4	C373	E3	C484	*F4	CN207	E4	IC401	*G3	Q208	C4	R230	*A4	R352	*E4	R492	*F4	R637	*E3		
C18	H2	C280	C4	C374	*C3	C486	*F4	CN401	G4	IC402	*G3	Q403	G4	R231	*B4	R353	*E4	R493	*F4	R638	*E3		
C19	H2	C281	C4	C375	*E4	C487	F3	CN402	G4	IC403	H3	Q404	G4	R232	B4	R354	*E4	R494	*F4	R639	*D3		
C20	H1	C282	*C4	C376	E4	C488	*F4	CN403	G4	IC404	F3	Q405	G4	R233	*A4	R355	*E4	R495	*F4	R640	*D3		
C21	H2	C283	*D4	C377	*E4	C489	*F4	CN404	H4	IC405	F3	Q406	G4	R234	A4	R356	*E4	R496	*F4	R641	*E2		
C22	*H1	C284	*D4	C378	*E4	C490	F4	CN405	F2	IC406	G3	Q410	H4	R235	*B4	R357	*E4	R499	*F4	R642	*E2		
C23	*H1	C285	*D4	C379	*C3	C491	*F4	CN406	F2	IC407	H4	Q411	H4	R236	*B4	R358	*E4	R501	*F4	R643	D1		
C24	H2	C286	*D4	C380	C3	C492	*F4	CN407	F4	IC409	F4	Q412	F4	R237	*B4	R359	E4	R502	F3	R644	D1		
C25	H2	C287	*D4	C384	E3	C493	*F4	CN408	E2	IC411	*E2	Q413	G4	R238	*A4	R360	*E4	R503	*F3				
C26	*H2	C288	*D4	C385	E3	C494	*F4	CN409	E2	IC601	*A2	Q414	*E2	R239	*A4	R361	*E4	R508	*F4	RB201	B3		
C27	*H1	C289	*C4	C387	*C4	C496	*F4	CN410	E2	IC602	*A2	Q415	*F2	R240	*A4	R362	*E4	R513	*F4	RB202	B3		
C28	*H2	C290	*C4	C388	*C4	C497	*F4	CN411	E2	IC603	*B2	Q416	*E2	R253	A3	R363	*C3	R516	F3	RB203	B3		
C29	*F2	C291	*C4	C389	*D4	C498	*F4			IC604	*B2	Q417	*F2	R255	A3	R364	*C3	R517	F3	RB204	A3		
C34	*D2	C292	*C4	C390	*D4	C501	G3	D1	F1	IC605	*C2			R257	B3	R365	*C3	R518	*E2	RB205	A3		
C35	E2	C293	*C4	C401	G3	C503	*F3	D2	F1	IC606	*C2	R1	*F1	R258	A3	R366	*C3	R519	*E1	RB206	A3		
C36	*E2	C294	*C4	C402	*G3	C504	*G4	D3	F1	IC607	D2	R2	*F1	R259	D4	R367	*C3	R520	G3	RB207	D3		
C201	B4	C295	*D4	C403	*H3	C505	*F4	D4	*G2	IC608	*C2	R3	F1	R260	*D3	R380	E3	R521	G3	RB208	D3		
C202	A4	C296	*C4	C404	*F3	C506	E2	D5	*G1	IC609	*D2	R4	*G2	R261	C4	R382	E3	R522	*G4	RB209	D3		
C203	B4	C297	*D4	C405	*F3	C507	F2	D6	*F3	IC610	*D2	R5	*G1	R262	*C3	R401	D1	R523	*E2	RB210	C3		
C204	B4	C298	*C4	C406	G3	C511	E2			IC611	*D2	R6	*F3	R263	*D4	R402	*G3	R524	F4	RB211	C3		
C205	A4	C299	*D4	C407	*H3	C512	E2	E1	F2	IC613	*C2	R7	*F2	R264	*C4	R403	G3	R525	G4	RB212	C3		
C206	A4	C300	*D4	C408	*G3	C513	*F2	E2	A4	IC614	*C2	R8	*G2	R265	*D4	R404	*H3	R528	G4	RB213	E3		
C207	B4	C301	*C4	C409	H3	C514	*E2	E3	H2	IC615	*C2	R9	*F2	R266	*D4	R405	*H3	R529	E1	RB214	E3		
C208	B4	C302	*D4	C410	*H3	C515	G4			IC616	*D2	R10	*G2	R267	*C4	R406	*G3	R530	E2	RB215	E3		
C209	*B4	C303	*C4	C411	H4	C516	G3	FB201	*A4	IC617	*A2	R11	*F2	R268	*C4	R407	*G4	R531	E2	RB401	A1		
C210	A4	C304	*D4	C412	*G3	C517	G3	FB202	*A4	IC618	*A2	R12	*G1	R269	*D4	R408	*G3	R532	E2	RB402	A1		
C211	A4	C305	*C4	C413	*G3	C518	*E2	FB203	*B4	IC619	A2	R13	*F2	R270	*C4	R409	*G4	R533	*E1	RB403	A1		
C212	*A4	C306	*D4	C414	*H4	C519	E2	FB204	*B4	IC620	A2	R14	*F2	R271	*D4	R410	*G4	R534	F4	RB404	B1		
C213	*B4	C307	*C4	C415	*G3	C520	*F2	FB205	*A4	IC621	B2	R15	*G1	R272	*D4	R411	*G4	R535	A1	RB405	C1		
C214	*B4	C308	*D4	C416	*H3	C521	*F2	FB206	*A4	IC622	B2	R16	*G1	R273	*C4	R412	*G4	R536	F3	RB406	C1		
C215	*B4	C309	*C4	C417	*G3	C522	E2	FB207	*A4	IC623	C2	R17	*G2	R274	*D4	R413	*G3	R537	F3	RB407	D1		
C216	*B4	C310	*D3	C418	*H3	C523	*E2	FB208	*A4	IC624	C2	R18	*G2	R275	*C4	R414	*H4	R538	*G4	RB408	D1		
C217	*B4	C311	*C4	C419	*G4	C524	*E2	FB209	*B3	IC625	E2	R19	*G2	R276	*D4	R415	*H4	R539	*G4	RB409	D1		
C218	*B4	C312	*D4	C420	*H4	C525	*E2	FB210	*A3	IC626	C2	R20	*G1	R277	*D4	R416	*H4	R540	*G4	RB410	H3		
C219	*A4	C313	*C3	C421	*G4	C601	*A2	FB211	*D4	IC627	D2	R21	*H1	R278	*C4	R417	*H4	R541	*G4	RB411	H3		
C220	*A4	C314	*D3	C422	*H4	C602	*A2	FB212	*D4	IC628	D2	R22	*H2	R279	*C4	R418	H4	R542	*F4	RB412	H3		
C221	*A4	C315	*C3	C423	*G4	C603	B2	FB213	*D4	IC629	D2	R23	*H1	R280	*C4	R419	*H4	R543	*F4	RB413	*G3		
C222	*A4	C316	*D3	C424	*H4	C604	*B2	FB214	*D4	IC630	A2	R24	*H1	R281	*D4	R420	*H4	R544	*E2	RB414	*G3		
C223	*A4	C317	*C3	C425	*G3	C605	*C2	FB215	*B4	IC631	A2	R25	*H2	R282	*D4	R421	*H4	R545	*E2	RB415	*G3		
C224	*A4	C318	*D3	C426	*H4	C606	*C2	FB216	*B4	IC632	B2	R26	*H2	R283	*C4	R422	*G4	R546	*E2	RB416	F3		
C225	*B4	C319	*C3	C427	*G3	C607	*D2	FB217	*C4	IC633	B2	R27	*H2	R284	*C4	R423	*G3	R547	*E2	RB417	F3		
C226	*A4	C320	D3	C428	*H4	C608	*C2	FB218	*C4	IC634	C2	R30	*H2	R285	*D4	R424	*H4	R548	*F2	RB418	F3		
C227	*B4	C321	*C3	C429	*G3	C609	*D2	FB219	*D3	IC635	C2	R31	*H2	R286	D4	R425	*G3	R549	*F2	RB419	*F3		
C228	*A4	C322	C3	C430	*H4	C610	*D2	FB220	*C3	IC636	C2	R32	*H2	R287	*C4	R426	*H4	R550	*E2	RB607	B1		
C229	*B4	C323	D3	C431	H3	C611	*D2	FB221	D3	IC637	*C2	R33	*H2	R288	C4	R427	*H4	R551	*E2	RB608	*B1		
C230	*B4	C324	C3	C432	*H4	C613	C2	FB222	C3	IC638	D2	R34	*H2	R289	*D4	R428	*G4	R552	*F2	RB609	*C1		
C231	*A4	C325	*D4	C433	H3	C614	*B1	FB223	*E4	IC639	D2	R35	*H2	R290	*D4	R429	*H4	R553	*E2	RB610	*A1		
C232	*B4	C326	D4	C434	*G4	C615	C1	FB224	*E4	IC640	D2	R36	*H2	R291	*D4	R431	*G3	R554	*E2	RB611	*A1		
C233	*A4	C327	*D4	C435	*G4	C616	*D2	FB225	*E4	IC641	D2	R37	*H2	R292	*C4	R433	G3	R555	*E2	RB612	*A1		
C234	*B4	C328	*D4	C436	*G4	C617	*A1	FB226	*E4	IC642	*E3	R38	*H1	R293	*C4	R434	G3	R556	*E2	RB613	A1		
C235	*A4	C329	*C4	C437	*H4	C618	*A2	FB227	*E3	IC643	*D3	R39	*H1	R294	*C4	R435	*H4	R557	*E2	RB614	A1		
C236	*B4	C330	C4	C438	*H4	C619	C2	FB401	*G3	IC644	E2	R42	*H2	R300	*E4	R436	H3	R558	*F3	RB615	A1		
C237	*A4	C331	*C4	C439	*G4	C620	A2	FB402	*G3			R43	*H1	R301	*C4	R437	*H3	R559	*F3	RB616	B1		
C238	*B4	C332	*C4	C440	H4	C621	A2	FB403	*H4	L1	G2	R44	*E2	R303	*E4	R442	*H4	R560	*E3	RB617	B1		
C239	*A4	C333	D3	C441	*G4	C622	*B2	FB404	*H4	L2	G1	R45	*H1	R304	*D4	R443	*H4	R561	*E2	RB618	B1		
C240	*B3	C334	C3	C442	*G3	C623	*B2	FB405	*G3	L3	F2	R46	*F2	R305	*D4	R444	*H4	R562	*E2				
C241	*A4	C335	*E4	C443	*H4	C624	C2	FB406	*H3	L4	*G2	R47	*F2	R306	*C4	R451	*H4	R563	*E2	RV201	B4		
C242	*B3	C336	*C4	C444	*G3	C625	C2	FB407	*G4	L5	*G2	R56	*D2	R307	*C4	R453	*G3	R601	D2	RV202	A4		
C243	*A3	C341	D4	C445	*H4	C626	*E2	FB408	*H4	L6	*H1	R59	*D2	R308	*C4	R455	H3	R602	D2	RV203	D4		
C244	*B3	C342	C4	C446	*H4	C627	C2	FB409	*F4	L7	*H2	R60	*E1	R310	*D4	R456	H3	R603	D2	RV204	C4		
C245	*A3	C343	C3	C447	*H4	C628	D2	FB410	*F4	L8	*D2	R61	*H1	R313	*C4	R457	G4	R604	D2	RV205	E4		
C246	*B3	C344	D3	C448	*G4	C629	*D2	FB411	*F3	L201	*A4	R201	B4	R315	D3	R458	G4	R605	D2	RV401	G4		
C247	*A3	C345	C3	C449	*H4	C630	*D2	FB412	*H3	L202	*A4	R202	*B3	R316	D4	R459	H4	R607	D1	RV402	H4		
C248	*B3	C346	D3	C450	*G3	C631	A2	FB413	*F3	L203	*B3	R203	A4	R317	C3	R460	G4	R608	E1	RV403	F4		
C249	*A3	C347	E4	C451	*G3	C632	A2			L204	*A3	R204	*A3	R318	C4	R461	H3	R609	E1				
C250	B3	C348	E4	C452	*H4	C633	B2	IC1	*G1	L209	*D4	R205	*B4	R319	E4	R462	H3	R610	E1	S1	H2		
C251	*A3	C349	E4	C453	*H4	C634	B2	IC2	*F2	L210	*B4	R206	*A4	R320	C4	R463	G4	R611	E1				
C252	A3	C350	E4	C457	H3	C635	C2	IC3	*G2	L211	*D4	R207	*B4	R321	*D4	R465	*G4	R612	D1	THP1	F1		
C253	B3	C351	E4	C459	*H3	C636	C2	IC4	H1	L212	*C3	R208	*B4	R322	*C4	R466	*G4	R613	D1	THP2	F1		
C254	A3	C352	*E4	C460	*G4	C637	C2	IC5	*H2	L217	*E4	R209	*A4	R323	D4	R467	*H4	R614	D1	THP3	F2		
C255	*B4	C353	*E4	C461	*H4	C638	C2	IC6	*H1	L218	*E3	R210	*A4	R324	D4	R468	G4	R615	D1				
C256	B4	C354	*E4	C462	*H4	C639	D2	IC7	*H2	L221	*C3	R211	*B4	R325	C4	R469	G4	R616	D1	TP1	H2		
C257	*B4	C355	*E4	C463	*H4	C640	D2	IC8	*E2	L402	*G3	R212	*A4	R326	C4	R470	G4	R617	*D3	TP201	A3		
C258	*B4	C356	*E4	C464	*G4	C641	*D2	IC201	B4	L403	*H3	R213	*B4	R330	*D4	R471	G4	R618	*D2	TP202	A3		

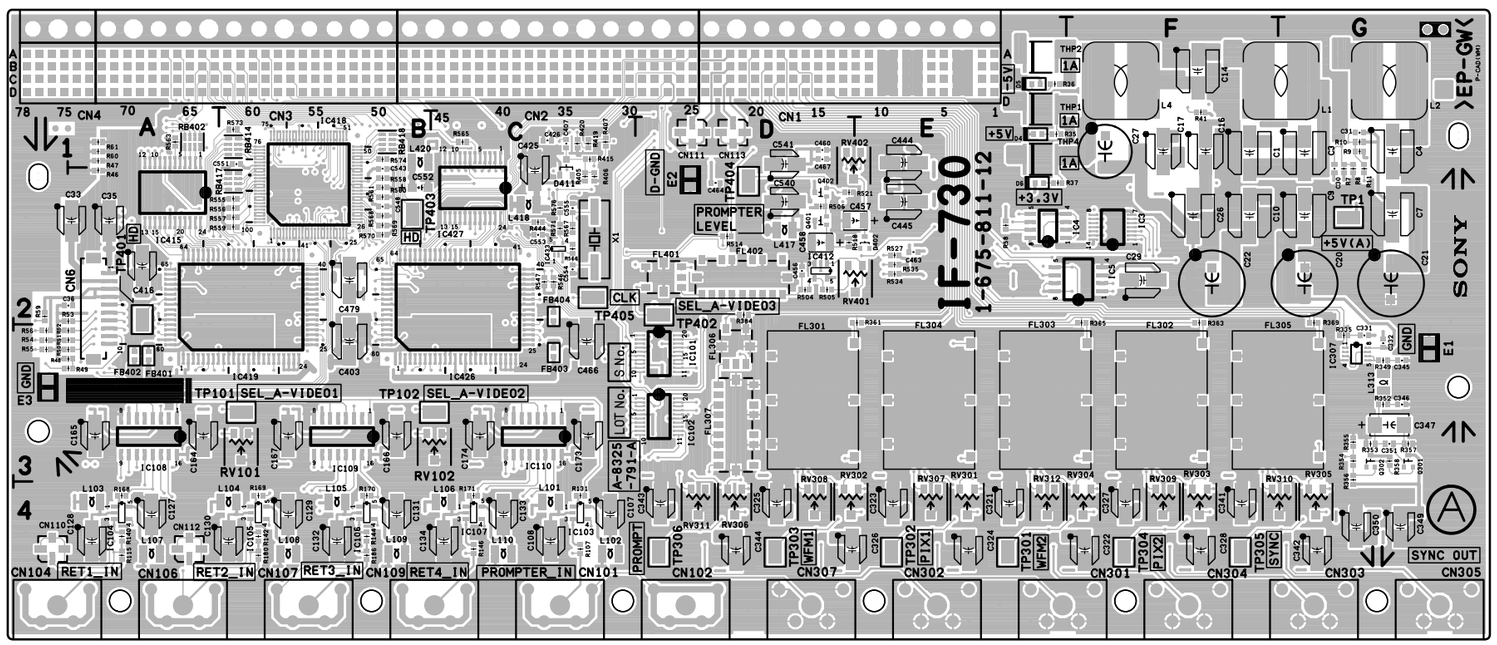

IF-730 -A SIDE-
SUFFIX: -12

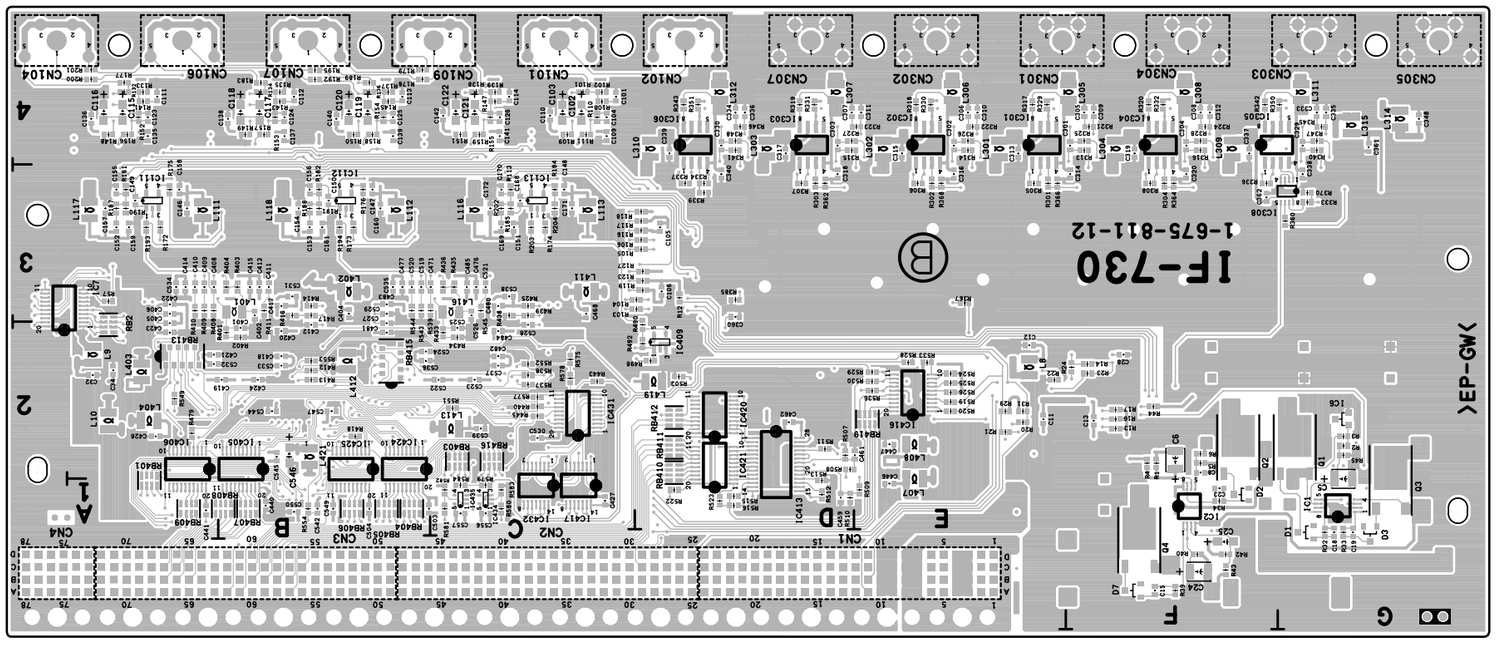

IF-730 -B SIDE-
SUFFIX: -12

CCU-900 (UC) : S/N 10001 and Higher
CCU-900 (J) : S/N 30001 and Higher
CCU-900P (CE) : S/N 40001 and Higher

IF-730 (1-675-811-12)
---

*:B SIDE

C1	F1	C159	*A3	C423	*A2	CN113	D1	L8	*E2	R41	F1	R189	*B4	R414	*B3	R582	*C1
C3	G1	C160	*B3	C424	*B2	CN301	E4	L9	*A2	R42	*F1	R190	*A3	R415	C1	R583	*C1
C4	G1	C161	*B3	C425	C2	CN302	E4	L10	*A2	R43	*F1	R191	*B3	R416	*B3	R584	*C1
C5	*G1	C164	A3	C426	C1	CN303	G4	L101	C4	R44	*F2	R192	*B4	R417	*B3		
C6	*F2	C165	A3	C427	*C1	CN304	F4	L102	C4	R45	*G2	R193	*A3	R418	*B2	RB2	*A2
C7	G2	C166	B3	C428	*A2	CN305	G4	L103	A4	R46	A2	R194	*B3	R419	C1	RB401	*A1
C8	*F2	C167	B3	C440	*B1	CN307	D4	L104	B4	R47	A1	R195	*B4	R420	C1	RB402	A1
C9	G2	C168	*C3	C441	*A1			L105	B4	R48	A3	R200	*A4	R425	*C3	RB403	*C2
C10	F2	C169	*C3	C444	E1	D1	*G1	L106	C4	R49	A3	R201	*A4	R433	*C2	RB404	*B1
C11	*E2	C170	*C3	C445	E2	D2	*F1	L107	A4	R50	A3	R202	*C3	R434	*C2	RB405	*B1
C12	*E2	C171	*C3	C446	*E1	D3	*G1	L108	B4	R51	A3	R203	*C3	R435	*C3	RB406	*B1
C13	*F2	C172	*C3	C447	*E2	D4	E1	L109	B4	R52	A3	R204	*C3	R436	*C3	RB407	*B1
C14	F1	C173	C3	C456	D2	D5	E1	L110	C4	R53	A2	R301	*E3	R438	*C3	RB408	*B1
C15	*F1	C174	C3	C457	E2	D6	E2	L111	*A3	R54	A3	R302	*E3	R439	*C3	RB409	*A1
C16	F1	C301	*F4	C458	D2	D7	*F1	L112	*B3	R55	A3	R303	*D3	R440	*C2	RB410	*D2
C17	F1	C302	*E4	C459	*D1	D402	E2	L113	*C3	R56	A3	R304	*F3	R443	*C2	RB411	*D2
C18	*G1	C303	*D4	C460	D1	D411	C1	L116	*C3	R57	*A3	R305	*E3	R444	C2	RB412	*D2
C19	*G1	C304	*F4	C461	*E2			L117	*A3	R58	E2	R306	*E3	R445	*C2	RB413	*A2
C20	G2	C305	*F4	C462	*D2	E1	G3	L118	*B3	R59	A2	R307	*D3	R479	*A2	RB414	B1
C21	G2	C306	*E4	C463	E2	E2	D2	L301	*E4	R60	A1	R308	*F3	R490	*D2	RB415	*B2
C22	F2	C307	*D4	C464	D2	E3	A3	L302	*E4	R61	A1	R313	*F4	R492	*D2	RB416	*C2
C23	*F1	C308	*F4	C466	C3			L303	*D4	R101	*C4	R314	*E4	R498	*D2	RB417	B2
C24	*F1	C309	*F4	C467	D1	FB401	A3	L304	*F4	R102	*C4	R315	*D4	R503	*D2	RB418	B1
C25	*F1	C310	*E4	C468	*C3	FB402	A3	L305	*F4	R103	*D3	R316	*F4	R504	D2	RB419	*E2
C26	F2	C311	*E4	C471	*C3	FB403	C3	L306	*E4	R104	*D3	R317	*E4	R505	D2		
C27	F1	C312	*F4	C476	*C3	FB404	C2	L307	*D4	R105	*D3	R318	*E4	R506	D2	RV101	B3
C28	*F2	C313	*E4	C477	*B3			L308	*F4	R106	*D3	R319	*D4	R507	*D2	RV102	C3
C29	F2	C314	*F3	C479	B2	FL301	D3	L309	*F4	R107	C4	R320	*F4	R508	*D2	RV301	E4
C30	G2	C315	*E4	C480	*C3	FL302	F3	L310	*D4	R108	*C4	R321	*F4	R509	*E1	RV302	D4
C31	G1	C316	*E3	C481	*B2	FL303	E3	L311	*G4	R109	*C4	R322	*E4	R510	*D1	RV303	F4
C32	*A2	C317	*D4	C482	*C2	FL304	E3	L312	*D4	R110	*C4	R323	*E4	R511	*D2	RV304	F4
C33	A2	C318	*D3	C483	*B3	FL305	F3	L313	G3	R111	*C4	R324	*F4	R512	*D1	RV305	G4
C34	*A2	C319	*F4	C484	*C2	FL306	D3	L314	*G4	R113	*C3	R325	*F4	R513	*D1	RV306	D4
C35	A2	C320	*F3	C485	*C3	FL307	D3	L315	*G4	R115	A4	R326	*E4	R514	D2	RV307	E4
C36	A2	C321	E4	C503	*B1	FL401	D2	L401	*B3	R116	*D3	R327	*D4	R515	*D1	RV308	D4
C101	*C4	C322	F4	C504	*B1	FL402	D2	L402	*B3	R117	*D3	R328	*F4	R516	*D1	RV309	F4
C102	*C4	C323	E4	C519	*B3			L403	*A2	R118	*D3	R329	*E4	R518	D2	RV310	G4
C103	*C4	C324	E4	C520	*B3	IC1	*G1	L404	*A2	R119	*D3	R330	*E4	R519	*E2	RV311	D4
C104	*C4	C325	D4	C521	*C3	IC2	*F1	L407	*E1	R123	*D3	R331	*D4	R520	*E2	RV312	E4
C105	*D3	C326	D4	C522	*C2	IC3	F2	L408	*E2	R127	*D3	R332	*F4	R521	D2	RV401	E2
C106	*D3	C327	F4	C523	*C2	IC4	E2	L411	*C3	R131	C4	R333	*G3	R522	*D1	RV402	D1
C107	C4	C328	F4	C524	*B2	IC5	F2	L412	*B2	R132	*A4	R334	*D3	R523	*D1		
C108	C4	C329	*G4	C525	*C2	IC6	*G2	L413	*C2	R133	*A4	R335	G3	R524	*E2	THP1	E1
C109	*C4	C330	*D4	C526	*C3	IC7	*A3	L416	*C3	R134	*B4	R336	*F3	R525	*E2	THP2	E1
C110	*C4	C331	G3	C527	*B2	IC101	D3	L417	D2	R135	*B4	R337	*D3	R526	*E2	THP4	E1
C111	*A4	C332	G3	C528	*C2	IC102	D3	L418	C2	R136	*B4	R339	*D3	R527	E2		
C112	*B4	C333	*G4	C529	*B3	IC103	C4	L419	*D2	R137	*B4	R340	*G4	R528	*E2	TP1	G2
C113	*B4	C334	*D4	C530	*C2	IC104	A4	L420	B1	R138	*C4	R341	*D4	R529	*E2	TP101	B3
C114	*C4	C335	*G4	C531	*B3	IC105	B4	L421	*B2	R139	*C4	R342	*F4	R530	*E2	TP102	C3
C115	*A4	C336	*D4	C532	*A2	IC106	B4			R140	A4	R343	*D4	R533	*E2	TP301	E4
C116	*A4	C337	*F4	C533	*B2	IC107	C4	Q1	*G2	R141	*A4	R345	*G4	R534	E2	TP302	E4
C117	*B4	C338	*G3	C534	*A3	IC108	A3	Q2	*F2	R142	B4	R346	*D4	R535	E2	TP303	D4
C118	*B4	C339	*D4	C535	*B3	IC109	B3	Q3	*G1	R143	*B4	R347	*G4	R536	*E2	TP304	F4
C119	*B4	C340	*D3	C536	*B2	IC110	C3	Q4	*F1	R144	B4	R348	*D4	R537	*C2	TP305	F4
C120	*B4	C341	F4	C537	*C2	IC111	*A3	Q301	G3	R145	*B4	R349	G3	R538	*C2	TP306	D4
C121	*C4	C342	G4	C538	*C3	IC112	*B3	Q302	G3	R146	C4	R350	*G4	R539	*C3	TP401	A2
C122	*C4	C343	D4	C539	*C2	IC113	*C3	Q401	D2	R147	*C4	R351	*D4	R543	*B3	TP402	D2
C123	*A4	C344	D4	C540	D2	IC301	*E4	Q402	D2	R148	*A4	R352	G3	R544	*B3	TP403	B2
C124	*B4	C345	G3	C541	D1	IC302	*E4			R149	*B4	R353	G3	R545	*C3	TP404	D2
C125	*B4	C346	G3	C542	*B1	IC303	*D4	R1	*F2	R150	*B4	R354	G3	R546	C2	TP405	C2
C126	*C4	C347	G3	C543	B2	IC304	*F4	R2	*G2	R151	*C4	R355	G3	R547	C2		
C127	A4	C348	*G4	C544	*B2	IC305	*F4	R3	*G2	R152	*A4	R356	G3	R549	*A2	X1	C2
C128	A4	C349	G4	C545	*B2	IC306	*D4	R4	*F2	R153	*B4	R357	G3	R551	*C2		
C129	B4	C350	G4	C546	*B2	IC307	G3	R5	*F2	R154	*B4	R358	G3	R552	*C2		
C130	B4	C351	G3	C547	*B2	IC308	*G3	R6	*F2	R155	*C4	R360	*G3	R553	*B2		
C131	B4	C360	*D3	C548	B2	IC405	*B2	R7	G2	R156	*A4	R361	E2	R554	*B1		
C132	B4	C361	*G4	C549	*B1	IC406	*A2	R8	G2	R157	*B4	R362	*D3	R555	B2		
C133	C4	C362	*F3	C550	*B1	IC409	*D2	R9	G1	R158	*B4	R363	F2	R556	B2		
C134	C4	C401	*B2	C551	B1	IC412	D2	R10	G1	R159	*C4	R364	*F3	R557	B2		
C135	*A4	C402	*B3	C552	B2	IC413	*D2	R11	G2	R168	A4	R365	F2	R558	B2		
C136	*A4	C403	B3	C553	C2	IC415	A2	R12	*D3	R169	B4	R366	*E3	R559	B2		
C137	*B4	C404	*B3	C554	C2	IC416	*E2	R13	*F2	R170	B4	R367	*E3	R560	B2		
C138	*B4	C405	*A2	C555	C2	IC417	*C1	R14	*F2	R171	C4	R368	*E3	R561	B2		
C139	*B4	C406	*A3	C556	*C1	IC418	B2	R16	*F2	R172	*A3	R369	G2	R563	A1		
C140	*B4	C407	C1	C557	*C1	IC419	B2	R17	*F2	R173	*B3	R370	*G3	R565	C1		
C141	*C4	C408	*A3			IC420	*D2	R20	*E2	R174	*C3	R384	D2	R566	C2		
C142	*C4	C409	*A3	CN1	D1	IC421	*D2	R21	*E2	R175	*A3	R385	*D3	R567	C2		
C146	*A3	C410	*A3	CN2	C1	IC424	*B2	R22	*E2	R176	*B3	R401	*B2	R568	B2		
C147	*B3	C411	*B3	CN3	B1	IC425	*B2	R23	*F2	R177	*A4	R402	*B2	R569	B2		
C148	*C3	C412	*B2	CN4	A1	IC426	C2	R24	*F2	R178	*B4	R403	*B3	R570	B2		
C149	*A3	C413	*B3	CN6	A2	IC427	C2	R29	*E2	R179	*B4	R404	*B3	R571	C2		
C150	*B3	C414	*A3	CN101	C4	IC431	*C2	R31	*E2	R180	B4	R405	C2	R573	B1		
C151	*C3	C415	*B3	CN102	D4	IC432	*C1	R32	*G1	R181	*A3	R406	C2	R574	B1		
C152	*A3	C416	A2	CN104	A4	IC433	C2	R33	*G1	R182	*B3	R407	C1	R575	*C2		
C153	*B3	C417	*B3	CN106	A4	IC434	*C1	R34	*F1	R183	*B4	R408	*A3	R576	C2		
C154	*B3	C418	*B2	CN107	B4	IC435	*C1	R35	E1	R184	*C3	R409	*A3	R577	*C2		
C155	*A3	C419	*B2	CN109	C4			R36	E1	R185	*C3	R410	*A3	R578	*C2		
C156	*B3	C420	*B2	CN110	A4	L1	G1	R37	E2	R186	B4	R411	*B3	R579	*C1		
C157	*A3	C421	*A2	CN111	D1	L2	G1	R39	*F1	R187	*A3	R412	*B2	R580	*C1		
C158	*A3	C422	*A3	CN112	A4	L4	F1	R40	*F1	R188	*B3	R413	*B2	R581	*C1		

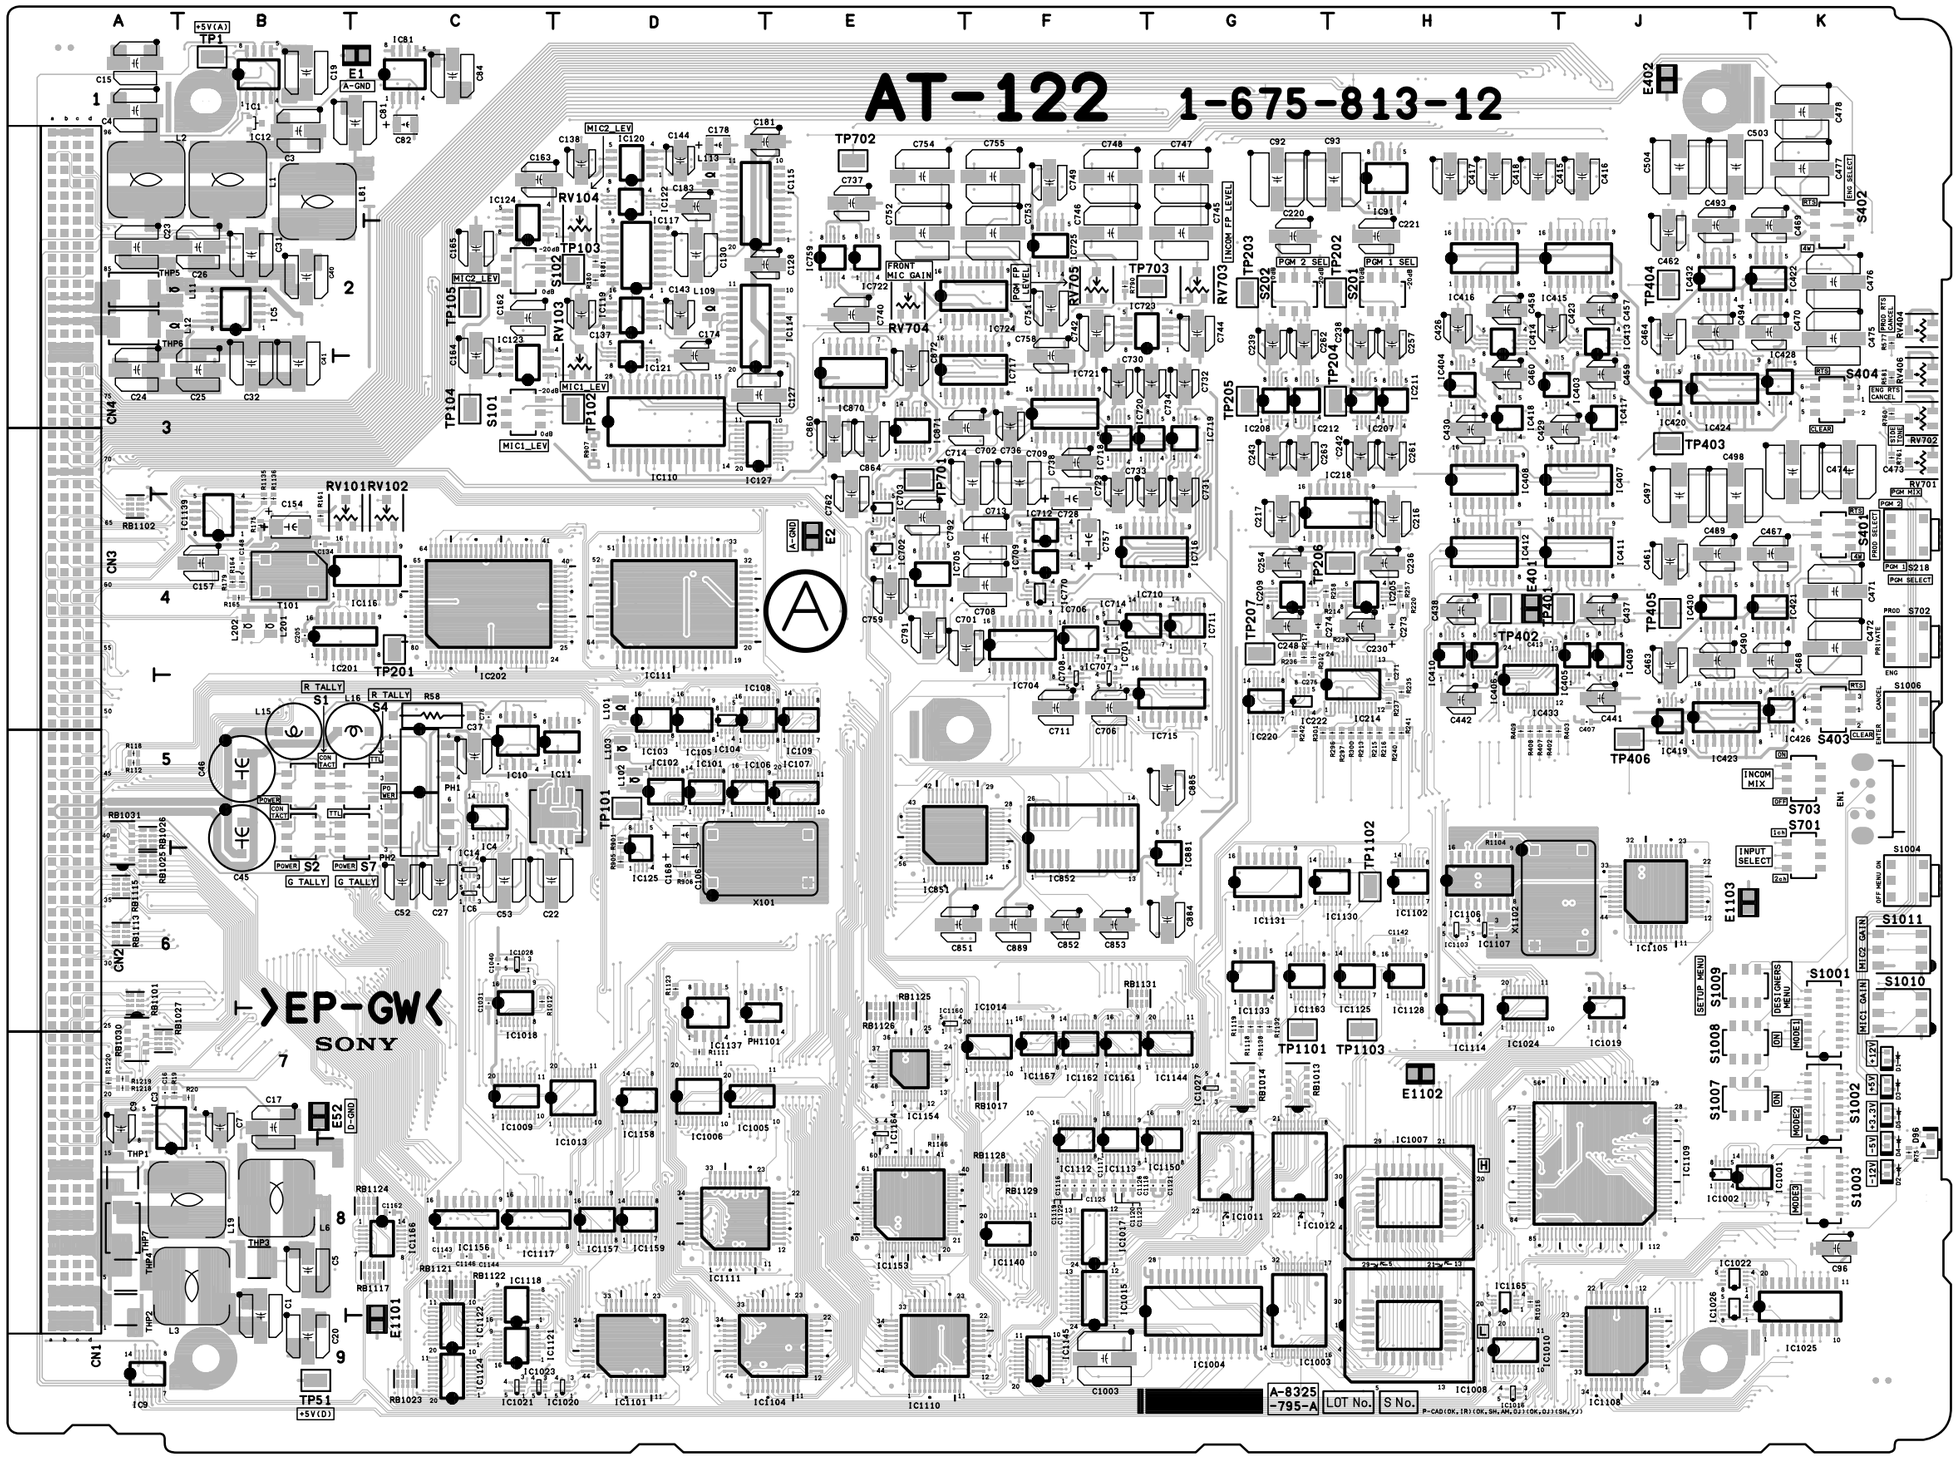

CCU-900 (UC) : S/N 10011 and Higher
CCU-900 (J) : S/N 30001 and Higher
CCU-900P (CE) : S/N 40008 and Higher

AT-122 -A SIDE-
SUFFIX: -12

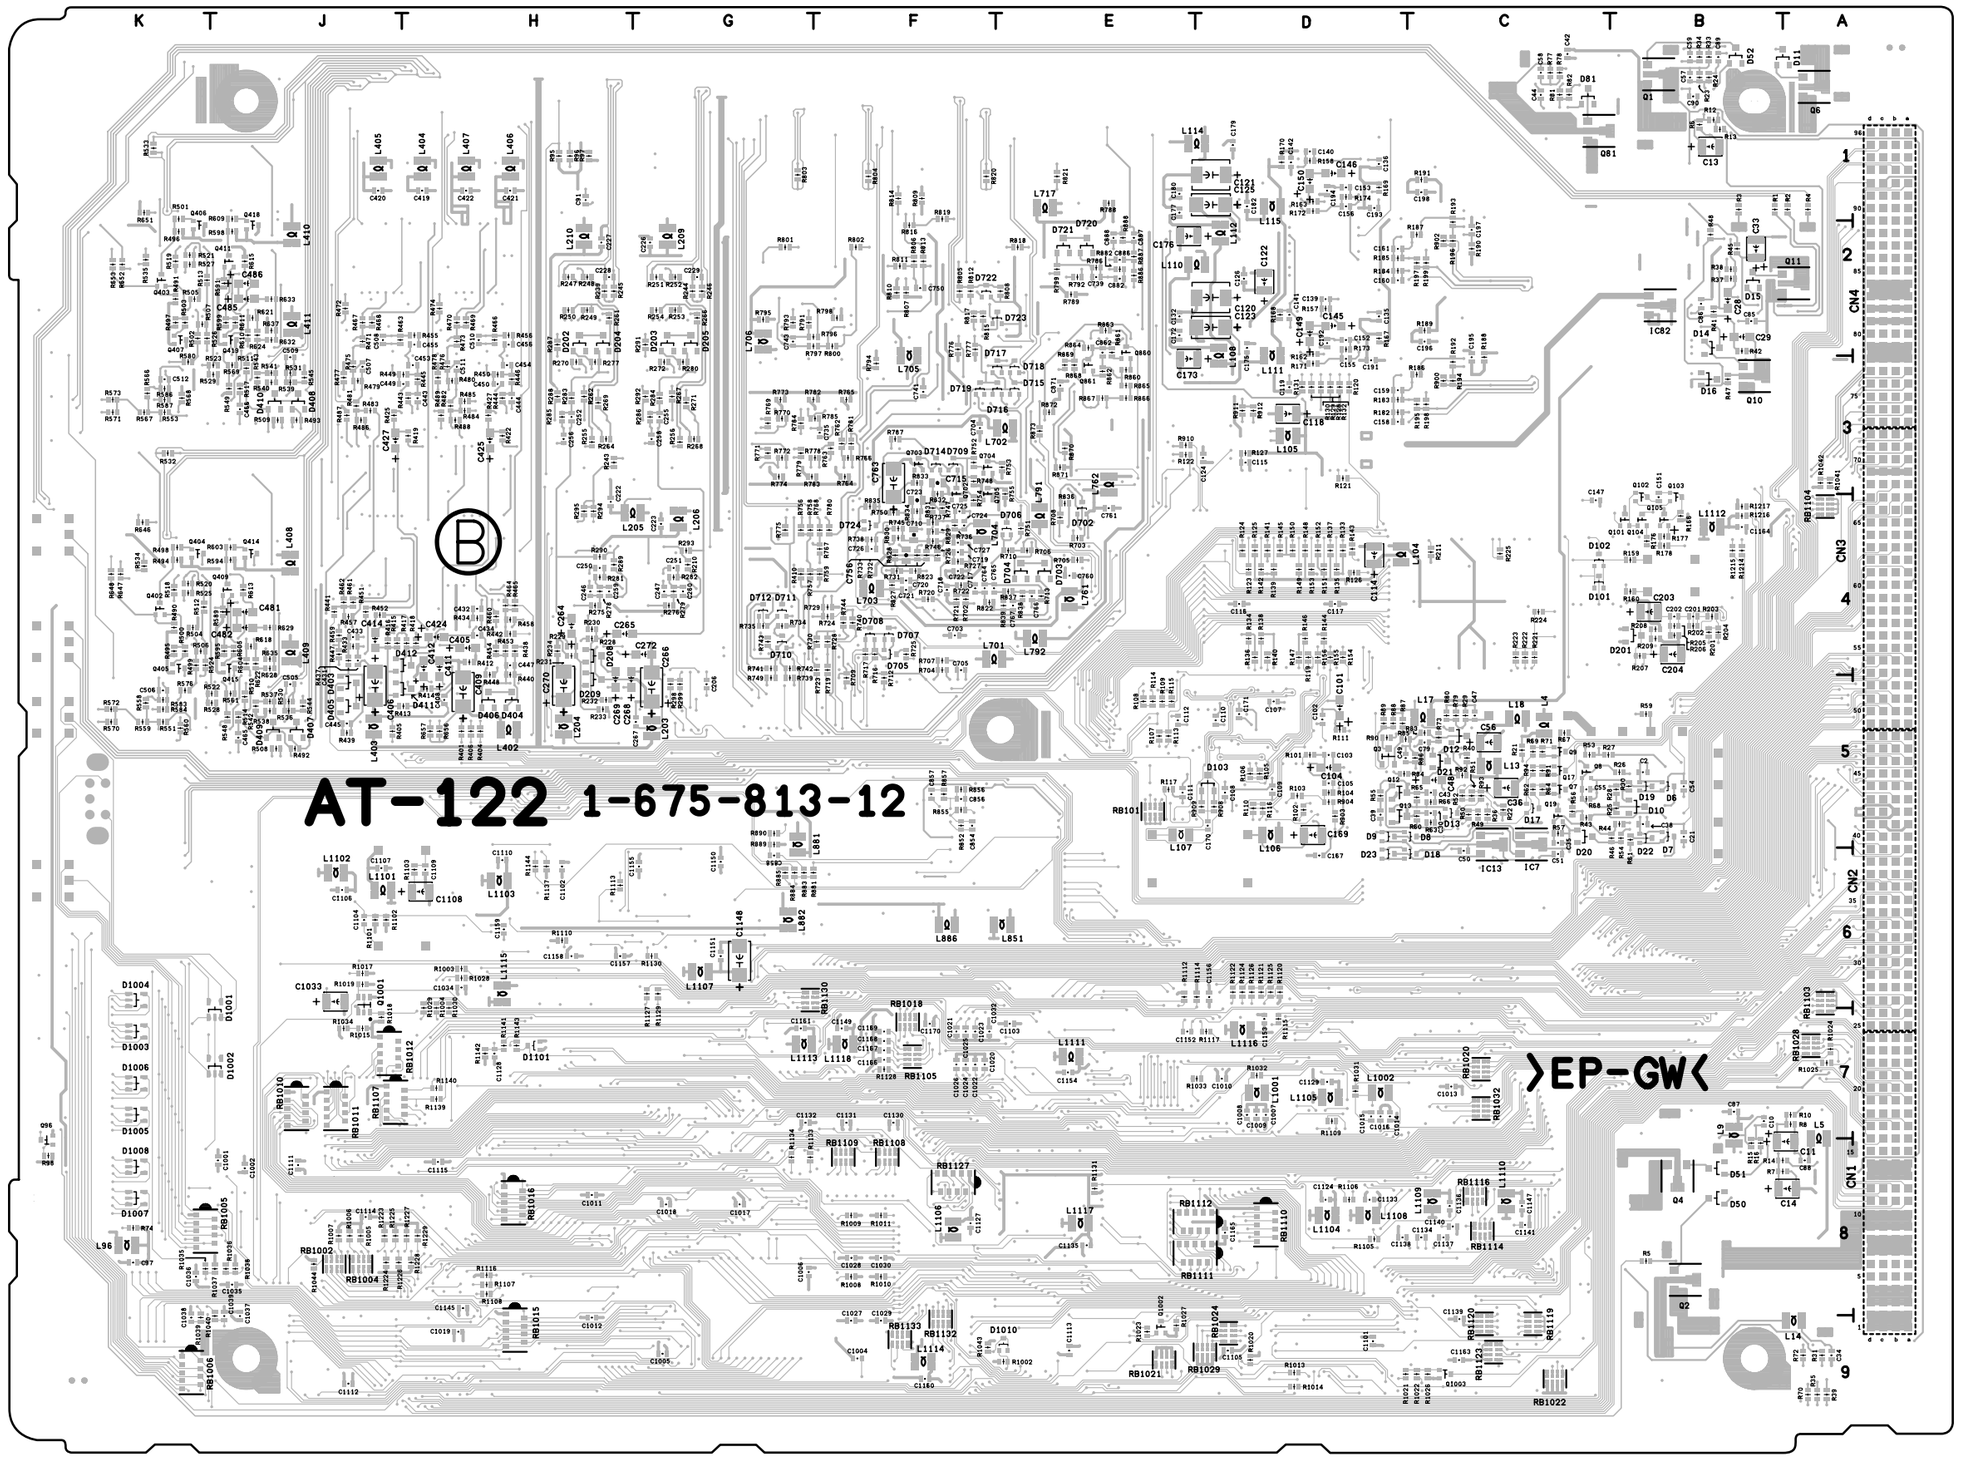

Components location list ; next page

AT-122 -B SIDE-
SUFFIX: -12

AT-122 (1-675-813-12)
---

*:B SIDE

C1	B9	C121	*D1	C247	*G4	C478	K1	C854	*F5	C1135	*E8	D702	*E4	IC214	H5	IC1101	D9	L406	*H1	R2	*A1	R98	*K8	R190	*C2	R291	*G2	R493	*J3	R621	*J2
C2	*B5	C122	*D2	C248	G4	C481	*J4	C856	*F5	C1136	*C8	D703	*E4	IC218	H4	IC1102	H6	L407	*H1	R3	*B1	R101	*D5	R191	*C1	R292	*G3	R494	*K4	R622	*J4
C3	B1	C123	*D2	C250	*H4	C482	*J4	C857	*F5	C1137	*C8	D704	*E4	IC220	G5	IC1103	H6	L408	*J4	R4	*A1	R102	*D5	R192	*C3	R293	*G4	R495	*K4	R624	*J2
C4	A1	C124	*D3	C251	*G4	C485	*J2	C858	*G6	C1138	*D8	D705	*F4	IC222	G5	IC1104	E9	L409	*J4	R5	*B8	R103	*D5	R193	*C2	R294	*H4	R496	*K2	R628	*J4
C5	B8	C125	*D1	C252	*H3	C486	*J2	C860	E3	C1139	*C9	D706	*E4	IC403	H3	IC1105	J6	L410	*J2	R6	*B1	R104	*D5	R194	*C3	R295	*H4	R497	*K2	R629	*J4
C7	B7	C126	*D2	C254	G4	C489	J4	C862	*E2	C1140	*C8	D707	*F4	IC404	H3	IC1106	H6	L411	*J2	R7	*A8	R105	*D5	R195	*C3	R296	H5	R498	*K4	R632	*J2
C9	A7	C127	D3	C255	*G3	C490	J4	C864	E3	C1141	*C8	D708	*F4	IC405	J4	IC1107	H6	L701	*F4	R8	*A7	R106	*D5	R196	*C2	R297	H5	R499	*K4	R633	*J2
C10	*B7	C128	D2	C256	*H3	C493	J2	C871	*E3	C1142	H6	D709	*F3	IC406	H4	IC1108	J9	L702	*E3	R10	*A7	R107	*E5	R197	*C2	R298	*G5	R500	*K4	R635	*J4
C11	*A8	C130	D2	C257	H2	C494	J2	C872	E3	C1143	C8	D710	*G4	IC407	J3	IC1109	J8	L703	*F4	R12	*B1	R108	*E5	R198	*C3	R299	*G5	R501	*K1	R637	*J2
C13	*B1	C132	*E2	C258	*G3	C497	J4	C882	*E2	C1144	C8	D711	*G4	IC408	H3	IC1110	E9	L704	*F4	R13	*B1	R109	*E5	R199	*C2	R300	H5	R502	*K2	R646	*K4
C14	*A8	C134	B4	C259	*H4	C498	J4	C884	G6	C1145	*H8	D712	*G4	IC409	J4	IC1111	D8	L705	*F3	R14	*A8	R110	*D5	R201	*B4	R301	G5	R503	*K2	R647	*K4
C15	A1	C135	*D2	C260	*G4	C503	J1	C885	G5	C1146	C8	D714	*F3	IC410	H4	IC1112	F8	L706	*G2	R15	*B8	R111	*D5	R202	*B4	R401	*H5	R504	*K4	R648	*K4
C16	A7	C136	*D1	C261	H3	C504	J1	C886	*E2	C1147	*C8	D715	*E3	IC411	J4	IC1113	F8	L717	*E1	R16	*B8	R112	A5	R203	*B4	R402	H5	R505	*K2	R651	*K1
C17	B7	C137	D2	C262	G2	C505	*J5	C887	*E2	C1148	*G6	D716	*E3	IC412	H4	IC1114	H7	L761	*E4	R19	A7	R113	*E5	R204	*B4	R403	H5	R506	*K4	R652	*K2
C19	B1	C138	D1	C263	G3	C506	*K5	C888	*E2	C1149	*F7	D717	*E3	IC413	J2	IC1117	C8	L762	*E3	R20	B7	R114	*E5	R205	*B4	R404	*H5	R507	*K2	R653	*K2
C20	B9	C139	*D2	C264	*H4	C507	*J3	C889	F6	C1150	*G6	D718	*E3	IC414	H2	IC1118	C8	L791	*E4	R21	*C5	R115	*E5	R206	*B4	R405	*J5	R508	*J5	R656	*H5
C21	*B5	C140	*D1	C265	*H4	C508	*J2	C1001	*J8	C1151	*G6	D719	*F3	IC415	J2	IC1121	C9	L792	*E4	R22	*C5	R116	*D5	R207	*B4	R406	*H5	R509	*J3	R657	*H5
C22	C6	C141	*D2	C266	*G5	C509	*J3	C1002	*J8	C1152	*E7	D720	*E2	IC416	H2	IC1122	C9	L851	*E6	R23	*B1	R117	*E5	R208	*B4	R407	H5	R510	*J5	R702	*F4
C23	A2	C142	*D1	C267	*G5	C510	*H2	C1003	F9	C1153	*D7	D721	*E2	IC417	J3	IC1124	C9	L881	*G5	R24	*B1	R118	A5	R209	*B4	R408	H5	R511	*J3	R703	*E4
C24	A3	C143	D2	C268	*H5	C511	*H3	C1004	*F9	C1154	*E7	D722	*F2	IC418	H3	IC1125	H6	L882	*G6	R25	*B5	R119	*D4	R210	*G4	R409	H5	R512	*K4	R704	*F4
C25	B3	C144	D1	C269	*H5	C512	*K3	C1005	*G9	C1155	*G6	D723	*E2	IC419	J5	IC1128	H6	L886	*F6	R26	*B5	R120	*D3	R211	*C4	R410	*G4	R513	*K2	R705	*E4
C26	B2	C145	*D2	C270	*H5	C701	F4	C1006	*G8	C1156	*D6	D724	*F4	IC420	J3	IC1130	H6	L1001	*D7	R27	*C5	R121	*D3	R212	G4	R412	*H4	R514	*J5	R706	*E4
C27	C6	C146	*D1	C271	H5	C702	F3	C1007	*D7	C1157	*H6	D1001	*J7	IC421	K4	IC1131	G6	L1002	*D7	R28	*B5	R122	*E3	R213	H5	R413	*H5	R517	*J3	R707	*F4
C28	*B2	C147	*C4	C272	*G4	C703	*F4	C1008	*D7	C1158	*H6	D1002	*J7	IC422	K2	IC1133	G6	L1101	*J6	R29	*C5	R123	*D4	R214	H4	R414	*H5	R518	*K4	R708	*E4
C29	*B2	C148	B4	C273	H4	C704	*F3	C1009	*D7	C1159	*H6	D1003	*K7	IC423	J5	IC1137	D7	L1102	*J6	R30	*B5	R124	*D4	R215	H5	R415	*J4	R519	*K2	R709	*F5
C30	*C5	C149	*D2	C274	G4	C705	*F4	C1010	*D7	C1160	*F9	D1004	*K6	IC424	J3	IC1139	B4	L1103	*H6	R31	*A9	R125	*D4	R216	H5	R416	*J4	R520	*K4	R710	*E4
C31	B2	C150	*D1	C275	G5	C706	F5	C1011	*H8	C1161	*G7	D1005	*K7	IC426	K5	IC1140	F8	L1104	*D8	R33	*B1	R126	*D4	R217	G4	R417	*H4	R521	*K2	R712	*F5
C32	B3	C151	*B4	C405	*H4	C708	F4	C1012	*H9	C1162	C8	D1006	*K7	IC428	K3	IC1144	G7	L1105	*D7	R34	*B1	R127	*D3	R220	H4	R418	*H4	R522	*J5	R713	*E4
C33	*B2	C152	*D2	C406	*J5	C709	F3	C1013	*C7	C1163	*C9	D1007	*K8	IC430	J4	IC1145	F9	L1106	*F8	R35	*A9	R128	*D3	R221	*C4	R419	*H3	R523	*J3	R716	*F4
C34	*A9	C153	*D1	C407	J5	C710	*F4	C1014	*D7	C1164	*B4	D1008	*K8	IC432	J2	IC1150	G8	L1107	*G6	R36	*C5	R129	*D3	R222	*C4	R422	*H3	R524	*K4	R717	*F4
C35	*C5	C154	B4	C408	*H5	C711	F5	C1015	*D7	C1165	*D8	D1010	*E9	IC433	H5	IC1153	E8	L1108	*D8	R37	*B2	R130	*D3	R223	*C4	R425	*J3	R525	*K4	R719	*F4
C36	*C5	C155	*D3	C409	*H5	C713	F4	C1016	*D7	C1166	*F7	D1101	*H7	IC701	F4	IC1154	E7	L1109	*C8	R38	*B2	R131	*D3	R224	*C4	R427	*H3	R526	*K2	R720	*F4
C37	C5	C156	*D1	C411	*H4	C714	F3	C1017	*G8	C1167	*F7			IC702	E4	IC1156	C8	L1110	*C8	R39	*A9	R132	*D3	R225	*C4	R433	*J4	R527	*K2	R721	*F4
C38	*B5	C157	B4	C412	*H4	C715	*F3	C1018	*G8	C1168	*F7	E1	C1	IC703	E4	IC1157	D8	L1111	*E7	R40	*C5	R133	*D4	R228	*H4	R434	*H4	R528	*J5	R722	*F4
C39	*D5	C158	*D3	C413	H4	C717	*F4	C1019	*H9	C1169	*F7	E2	E4	IC704	F4	IC1158	D7	L1112	*B4	R41	*B2	R134	*D4	R229	*H4	R437	*J4	R529	*J3	R723	*F4
C40	B2	C159	*D3	C414	*J4	C718	*F4	C1020	*F7	C1170	*F7	E52	B7	IC705	E4	IC1159	D8	L1113	*G7	R42	*B2	R135	*D4	R230	*H4	R438	*H4	R530	*J5	R724	*F4
C41	B3	C160	*D2	C415	H1	C719	*F4	C1021	*F7			E401	H4	IC706	F4	IC1160	E7	L1114	*F9	R43	*C5	R136	*D4	R231	*H4	R439	*J5	R531	*J3	R725	*F4
C42	*C1	C161	*D2	C416	J1	C720	*F4	C1022	*F7	CN1	A8	E402	J1	IC707	F5	IC1161	F7	L1115	*H6	R44	*B5	R137	*D4	R232	*H5	R440	*H5	R532	*K3	R726	*F4
C43	*C5	C162	C2	C417	H1	C721	*F4	C1023	*F7	CN2	A6	E1101	C9	IC708	F5	IC1162	F7	L1116	*D7	R45	*B2	R138	*D4	R233	*H5	R441	*J4	R533	*K1	R727	*F4
C44	*C1	C163	C1	C418	H1	C722	*F4	C1024	*F7	CN3	A4	E1102	H7	IC709	F4	IC1163	G6	L1117	*E8	R46	*B5	R139	*D4	R234	*H4	R442	*H4	R534	*K4	R728	*F4
C45	B5	C164	C3	C419	*H1	C723	*F4	C1025	*F7	CN4	A2	E1103	J6	IC710	F4	IC1164	E7	L1118	*F7	R47	*B3	R140	*D4	R235	H5	R443	*H3	R535	*K2	R729	*F4
C46	B5	C165	C2	C420	*J1	C724	*F4	C1026	*F7					IC711	G4	IC1165	H8			R48	*B2	R141	*D4	R236	G4	R444	*H3	R536	*J5	R730	*F4
C47	*C5	C167	*D6	C421	*H1	C725	*F4	C1027	*F9	D1	K7	EN1	K5	IC712	F4	IC1166	C8	PH1	C5	R49	*C5	R142	*D4	R237	H5	R445	*H3	R537	*J5	R731	*F4
C48	*C5	C168	D6	C422	*H1	C726	*F4	C1028	*F8	D2	K8			IC714	F4	IC1167	F7	PH2	C5	R50	*C5	R143	*D4	R238	G4	R446	*H3	R538	*J5	R732	*F4
C49	*D5	C169	*D5	C423	H2	C727	*F4	C1029	*F9	D3	K7	IC1	B1	IC715	G5			PH1101	D7	R51	*C5	R144	*D4	R239	*H2	R447	*J4	R539	*J3	R733	*F4
C50	*C6	C170	*D5	C424	*H4	C728	F4	C1030	*F8	D4	K8	IC3	A7	IC716	G4	L1	B1			R52	*C5	R145	*D4	R240	H5	R448	*H5	R540	*J3	R734	*G4
C51	*C6	C171	*D5	C425	*H3	C729	F3	C1031	C6	D5	K7	IC4	C5	IC717	F3	L2	A1	Q1	*B1	R53	*C5	R146	*D4	R241	H5	R449	*H3	R541	*J3	R735	*G4
C52	C6	C172	*E2	C426	H2	C730	F3	C1032	*F7	D6	*B5	IC5	B2	IC718	F3	L3	B8	Q2	*B8	R54	*B5	R147	*D4	R242	G5	R450	*H3	R542	*J5	R736	*F4
C53	C6	C173	*E3	C427	*J3	C731	G3	C1033	*J6	D7	*B5	IC6	C6	IC719	G3	L4	*C5	Q3	*D5	R55	*D5	R148	*D4	R243	*H3	R451	*J4	R543	*J3	R737	*F4
C54	*B5	C174	D3	C429	J3	C732	G3	C1034	*H6	D8	*C5	IC7	*C5	IC720	G3	L5	*A8	Q4	*B8	R56	*C5	R149	*D4	R244	*G2	R452	*J4	R544	*J5	R738	*F4
C55	*C5	C175	*D2	C430	H3	C733	G3	C1035	*J8	D9	*D5	IC9	A9	IC721	F3	L6	B8	Q6	*A1	R57	*C5	R150	*D4	R245	*H2	R453	*H4	R545	*J3	R739	*G5
C56	*C5	C176	*E2	C431	*J4	C734	G3	C1036	*K8	D10	*B5	IC10	C5	IC722	E2	L9	*B7	Q7	*C5	R58	C5	R151	*D4	R246	*G2	R454	*H4	R548	*J5	R740	*F4
C57	*B1	C177	*E1	C432	*H4	C735	*F3	C1037	*J9	D11	*A1	IC11	D5	IC723	F2	L11	A2	Q8	*C5	R59	*B5	R152	*D4	R247	*H2	R455	*H2	R549	*J3	R741	*G4
C58	*C1	C178	D1	C433	*J4	C736	F3	C1038	*K9	D12	*C5	IC12	B1	IC724	F2	L12	A2	Q9	*C5	R60	*C5	R153	*D4	R248	*H2	R456	*H2	R551	*K5	R742	*G4
C59	*B1	C179	*D1	C434	*H4	C737	E1	C1039	*J9	D13	*C5	IC13	*C5	IC725	F2	L13	*C5	Q10	*B3	R61	*B5	R154	*D4	R249	*H2	R457	*J4	R553	*K3	R743	*G4
C78	C5	C180	*E1	C437	J4	C738	F3	C1040	C6	D14	*B2	IC14	C6	IC759	E2	L14	*A9	Q11	*A2	R62	*C5	R155	*D4	R250	*H2	R458	*H4	R558	*K5	R744	*F4
C79	*C5	C181	D1	C438	H4	C739	*E2	C1101	*D9	D15	*B2	IC81	C1	IC770	F4	L15	B5	Q12	*D5	R63	*C5	R156	*D4	R251	*G2	R459	*J4	R559	*K5	R745	*F4
C81	C1	C182	*D1	C441	J5	C740	E2	C1102	*H6	D16	*B3	IC82	*B2	IC851	E5	L16	C5	Q13	*D5	R64	*C5	R157	*D2	R252	*G2	R460	*H4	R560	*K5	R746	*F4
C82	C1	C183	D1	C442	H5	C741	*F3	C1103	*E7	D17	*C5	IC91	H1	IC852	F5	L17	*C5	Q17	*C5	R65	*C5	R158	*D1	R253	*G2	R461	*J4	R561	*J5	R747	*F4
C84	C1	C191	*D3	C443	*H3	C742	F2	C1104	*J6	D18	*C6	IC101	D5	IC870	E3	L18	*C5	Q19	*C5	R66	*C5	R159	*B4	R254	*G2	R462	*J4	R566	*K3	R748	*F3
C85	*B2	C192	*D2	C444	*H3	C743	*G2	C1105	*D9	D19	*B5	IC102	D5	IC871	E3	L19	B8	Q81	*C1	R67	*C5	R160	*B4	R255	*H3	R463	*J2	R567	*K3	R749	*G5
C86	*B2	C193	*D1	C445	*J5	C744	G2	C1106	*J6	D20	*C5	IC103	D5	IC881	G6	L81	B1	Q96	*K8	R68	*C5	R161	B4	R256	*G3	R464	*H4	R568	*K3	R750	*F4
C87	*B7	C194	*D1	C447	*H4	C745	G2	C1107	*J6	D21	*C5	IC104	D5	IC1001	K8	L96	*K8	Q101	*B4	R69	*C5	R162	*D2	R257	H4	R465	*H4	R569	*J3	R751	*E4
C88	*A8	C195	*C3	C449	*H3	C746	F2	C1108	*H6	D22	*B5	IC105	D5	IC1002	J8	L101	D5	Q102	*B4	R70	*A9	R163	*D1	R258	G4	R466	*H2	R570	*K5	R752	*F3
C89	*B1	C196	*C2	C450	*H3	C747	G1	C1109	*H6	D23	*D6	IC106	D5	IC1003	G8	L102	D5	Q103	*B4	R71	*C5	R164	B4	R261	*H2	R467	*J2	R571	*K3	R753	*E3
C90	*B1	C197	*C2	C453	*H3	C748	F1	C1110	*H6	D50	*B8	IC107	E5	IC1004	G8	L103	D5	Q104	*B4	R72	*A9	R165	B4	R262	*H3	R468	*J2	R572	*K5	R754	*F4
C91	*H1	C198	*C1	C454	*H3	C749	F1	C1111	*J8	D51	*B8	IC108	D5	IC1005	D7	L104	*D4	Q105	*B4	R73	*C5	R166	*B4	R264	*H3	R469	*H2	R573	*K3	R755	*E4
C92	G1	C201	*B4	C455	*H2	C750	*F2	C1112	*J9	D52	*B1	IC109	E5	IC1006	D7	L105	*D3	Q402	*K4	R74	*K8	R167	*D2	R266	*G2	R470	*H2	R576	*K5	R756	*G4
C93	H1	C202	*B4	C456	*H2	C751	F2	C1113	*E9	D81	*C1	IC110	D3	IC1007	H8	L106	*D5	Q403	*K2	R75	K8	R168	*D2	R267	*G3	R471	*J2	R577	K2	R757	*G4
C96	K8	C203	*B4	C457	J2	C752	E2	C1114	*J8	D96	K8	IC111	D4	IC1008	H9	L107	*E5	Q404	*K4	R77	*C1	R169	*D1	R268	*G3	R472	*J2	R580	*K3	R758	*G4
C97	*K8	C204	*B4	C458	H2	C753	F2	C1115	*H8	D101	*C4	IC114	D2	IC1009	C7	L108	*D3	Q405	*K4	R78	*C1	R170	*D1	R269	*H3	R473	*H2	R581	K3	R759	*F4
C101	*D5	C205	B4	C459	J3	C754	E1	C1116	F8	D102	*C4	IC115	D1	IC1010	H9	L109	D2	Q406	*K2	R79	*C5	R171	*D3	R270	*H3	R474	*H2	R583	*K5	R760	K3
C102	*D5	C206	*G5	C460	H3	C755	F1	C1117	F8	D103	*D5	IC116	C4	IC1011	G8	L110	*D2	Q407	*K2	R80	*C5	R172	*D1	R271	*G3	R475	*J3	R584	*K5	R761	K3
C103	*D5	C216	H4	C461	J4	C756	*F4	C1118	G8	D201	*B4	IC117	D2	IC1012	G8	L111	*D3	Q409	*J4	R81	*C1	R173	*D2	R272	*G3	R476	*H3	R586	*K3	R762	*F3
C104	*D5	C217	G4	C462	J2	C757	F4	C1119	F8	D202	*H2	IC119	D2	IC1013	D7	L112	*D2	Q411	*J2	R82	*C1	R174	*D1	R275	*H4	R477	*J3	R587	*K3	R763	*F3
C105	*D5	C220	G2	C463	J4	C758	F3	C1120	F8	D203	*G2	IC120	D1	IC1014	F7	L113	D1	Q414	*J4	R83	*C5	R175	B4	R276	*G4	R478	*H3	R589	*J4	R764	*F3
C106	D5	C221	H2	C464	J2	C759	E4	C1121	G8	D204	*H2	IC121	D2	IC1015	F8	L114	*D1	Q415	*J4	R84	*D5	R176	*B4	R277	*H3	R479	*J3	R591	*J2	R765	*F3
C107	*D5	C222	*H4	C465	*J5	C760	*E4	C1122	F8	D205	*G2	IC122	D1	IC1016	H9	L115	*D1	Q418	*J2	R85	*D5	R177	*B4	R278	*H4	R480	*H3	R594	*J4	R766	*F3
C108	*D5	C223	*G4	C466	*J3	C761	*E4	C1123	F8	D208	*H4	IC123	C3	IC1017	F8	L201	B4	Q419	*J2	R86	*C5	R178	*B4	R279	*G4	R481	*J3	R595	*J4	R767	*F4
C109	*D5	C226	*G2	C467	K4	C762	E4	C1124	*D8	D209	*H5	IC124	C2	IC1018	C6	L202	B4	Q702	*F4	R87	*D5	R179	B4	R280	*G3	R482	*H3	R598	*J2	R768	*F4
C110	*D5	C227	*H2	C468	K4	C763	*F3	C1125	F8	D403	*J5	IC125	D6	IC1019	J6	L203	*G5	Q703	*F3	R88	*D5	R180	D2	R281	*H4	R483	*J3	R599	*J2	R769	*G3
C111	*E5	C228	*H2	C469	K2	C764	*F4	C1126	F8	D404	*H5	IC127	D3	IC1020	D9	L204	*H5	Q704	*F3	R89	*D5	R181	D2	R282	*G4	R484	*H3	R603	*J4	R770	*G3
C112	*E5	C229	*G2	C470	K2	C765	*F4	C1127	*F8	D405	*J5	IC201	B4	IC1021	C9	L205	*G4	Q705	*F4	R90	*D5	R182	*D3	R283	*H3	R485	*H3	R604	*J4	R771	*G3
C114	*D4	C230	H4	C471	K4	C766	*E4	C1128	*H7	D406	*H5	IC202	C4	IC1022	J8	L206	*G4	Q860	*E2	R91	*C5	R183	*D3	R284	*G3	R486	*J3	R605	*J4	R772	*G3
C115	*D3	C236	H4	C472	K4	C767	*E4	C1129	*D7	D407	*J5	IC205	H4	IC1023	C9	L209	*G2	Q861	*E3	R92	*C5	R184	*D2	R285	*H3	R487	*J3	R609	*J1	R773	*G3
C116	*D4	C238	H2	C473	K3	C791	E4	C1130	*F7	D408	*J3	IC207	H3	IC1024	H7	L210	*H2	Q1001	*J6	R93	*C5	R185	*D2	R286	*G3	R488	*H3	R610	*J2	R774	*G3
C117	*D4	C239	G2	C474	K3	C792	E4	C1131	*F7	D409	*J5	IC208	G3	IC1025	K8	L402	*H5	Q1002	*E9	R94	*C5	R186	*C3	R287	*H2	R489	*H3	R611	*J2	R775	*G4
C118	*D3	C242	H3	C475	K2	C851	E6	C1132	*G7	D410	*J3	IC209	G4	IC1026	J8	L403	*J5	Q1003	*C9	R95	*H1	R187	*C2	R288	*H3	R490	*K4	R613	*J4	R776	*F2
C119	*D3	C243	G3	C476	K2	C852	F6	C1133	*D8	D411	*H5	IC211	H3	IC1027	G7	L404	*H1			R96	*H1	R188	*C3	R289	*H4	R491	*K2	R615	*J2	R777	*F2
C120	*D2	C246	*H4	C477	K1	C853	F6	C1134	*C8	D412	*H4	IC212	G3	IC1028	C6	L405	*J1	R1	*B1	R97	*H1	R189	*C2	R290	*H4	R492	*J5	R618	*J4	R778	*F3

R779	*G3	R904	*D5	R1139	*H7	RV704	E2
R780	*F4	R905	D6	R1140	*H7	RV705	F2
R781	*F3	R906	D6	R1141	*H7		
R782	*F3	R907	D3	R1142	*H7	S1	B5
R783	*G3	R908	*D5	R1143	*H7	S2	B5
R784	*G3	R909	*D5	R1144	*H6	S4	C5
R785	*F3	R910	*E3	R1146	E7	S7	C5
R786	*E2	R911	*D3	R1214	*B4	S101	C3
R787	*F3	R912	*D3	R1215	*B4	S102	C2
R788	*E1	R1002	*E9	R1216	*B4	S201	H2
R789	*E2	R1003	*H6	R1217	*B4	S202	G2
R790	F2	R1004	*H7	R1218	A7	S218	K4
R791	*G2	R1005	*J8	R1219	A7	S401	K4
R792	*E2	R1006	*J8	R1220	A7	S402	K2
R793	*G2	R1007	*J8	R1223	*J8	S403	K5
R794	*F3	R1008	*F8	R1224	*J8	S404	K3
R795	*G2	R1009	*F8	R1225	*J8	S701	K6
R796	*F2	R1010	*F8	R1226	*J8	S702	K4
R797	*F2	R1011	*F8	R1227	*H8	S703	K5
R798	*F2	R1012	C6	R1228	*H8	S1001	K7
R799	*E2	R1013	*D9	R1229	*H8	S1002	K7
R800	*F2	R1014	*D9			S1003	K8
R801	*G2	R1015	*J7	RB101	*E5	S1004	K6
R802	*F2	R1016	H8	RB1002	*J8	S1006	K5
R803	*G1	R1017	*J6	RB1004	*J8	S1007	J7
R804	*F1	R1018	*J7	RB1005	*K8	S1008	J7
R805	*F2	R1019	*J6	RB1006	*K9	S1009	J6
R806	*F2	R1020	*D9	RB1010	*J7	S1010	K7
R807	*F2	R1021	*D9	RB1011	*J7	S1011	K6
R808	*E2	R1022	*C9	RB1012	*J7		
R809	*F1	R1023	*E9	RB1013	G7	T1	D5
R810	*F2	R1024	*A7	RB1014	G7	T101	B4
R811	*F2	R1025	*A7	RB1015	*H9		
R812	*F2	R1026	*C9	RB1016	*H8	THP1	A8
R813	*F2	R1027	*E9	RB1017	F7	THP2	A8
R814	*F1	R1028	*H6	RB1018	*F7	THP3	B8
R815	*F2	R1029	*H7	RB1020	*C7	THP4	A8
R816	*F2	R1030	*H7	RB1021	*E9	THP5	A2
R817	*F2	R1031	*D7	RB1022	*C9	THP6	A2
R818	*E2	R1032	*D7	RB1023	C9	THP7	A8
R819	*F1	R1033	*D7	RB1024	*D9		
R820	*F1	R1034	*J7	RB1025	A6	TP1	B1
R821	*E1	R1035	*K8	RB1026	A5	TP51	B9
R822	*F4	R1036	*J8	RB1027	A7	TP101	D5
R823	*F4	R1037	*J8	RB1028	*A7	TP102	D3
R827	*F4	R1038	*J8	RB1029	*D9	TP103	D2
R828	*F4	R1039	*K9	RB1030	A7	TP104	C3
R829	*F4	R1040	*J9	RB1031	A5	TP105	C2
R830	*F4	R1041	*A3	RB1032	*C7	TP201	C4
R831	*F4	R1042	*A3	RB1101	A6	TP202	H2
R832	*F4	R1043	*F9	RB1102	A4	TP203	G2
R833	*F3	R1044	*J8	RB1103	*A6	TP204	H3
R834	*F4	R1101	*J6	RB1104	*A4	TP205	G3
R835	*F4	R1102	*J6	RB1105	*F7	TP206	H4
R836	*E4	R1103	*H6	RB1107	*J7	TP207	G4
R837	*E4	R1104	H5	RB1108	*F8	TP401	J4
R838	*E4	R1105	*D8	RB1109	*F8	TP402	H4
R839	*E4	R1106	*D8	RB1110	*D8	TP403	J3
R852	*F5	R1107	*H8	RB1111	*D8	TP404	J2
R855	*F5	R1108	*H8	RB1112	*D8	TP405	J4
R856	*F5	R1109	*D7	RB1113	A6	TP406	J5
R857	*F5	R1110	*H6	RB1114	*C8	TP701	E3
R860	*E3	R1111	D7	RB1115	A6	TP702	E1
R861	*E2	R1112	*E6	RB1116	*C8	TP703	G2
R862	*E3	R1113	*H6	RB1117	C8	TP1101	G7
R863	*E2	R1114	*D6	RB1119	*C9	TP1102	H6
R864	*E2	R1115	*D7	RB1120	*C9	TP1103	H7
R865	*E3	R1116	*H8	RB1121	C8		
R866	*E3	R1117	*D7	RB1122	C8	X101	D6
R867	*E3	R1118	G7	RB1123	*C9	X1102	H6
R868	*E3	R1119	G7	RB1124	C8		
R869	*E3	R1120	*D6	RB1125	E7		
R870	*E3	R1121	*D6	RB1126	E7		
R871	*E3	R1122	*D6	RB1127	*F8		
R872	*E3	R1123	D6	RB1128	F8		
R873	*E3	R1124	*D6	RB1129	F8		
R881	*F6	R1125	*D6	RB1130	*G6		
R882	*E2	R1126	*D6	RB1131	F6		
R883	*G6	R1127	*G6	RB1132	*F9		
R884	*G6	R1128	*F7	RB1133	*F9		
R885	*G6	R1129	*G6				
R886	*E2	R1130	*G6	RV101	B4		
R887	*E2	R1131	*E8	RV102	C4		
R888	*E2	R1132	G7	RV103	D3		
R889	*G5	R1133	*G8	RV104	D2		
R890	*G5	R1134	*G8	RV404	K2		
R900	*C3	R1135	B4	RV406	K3		
R901	D5	R1136	B4	RV701	K3		
R902	*C2	R1137	*H6	RV702	K3		
R903	*D5	R1138	G7	RV703	G2		

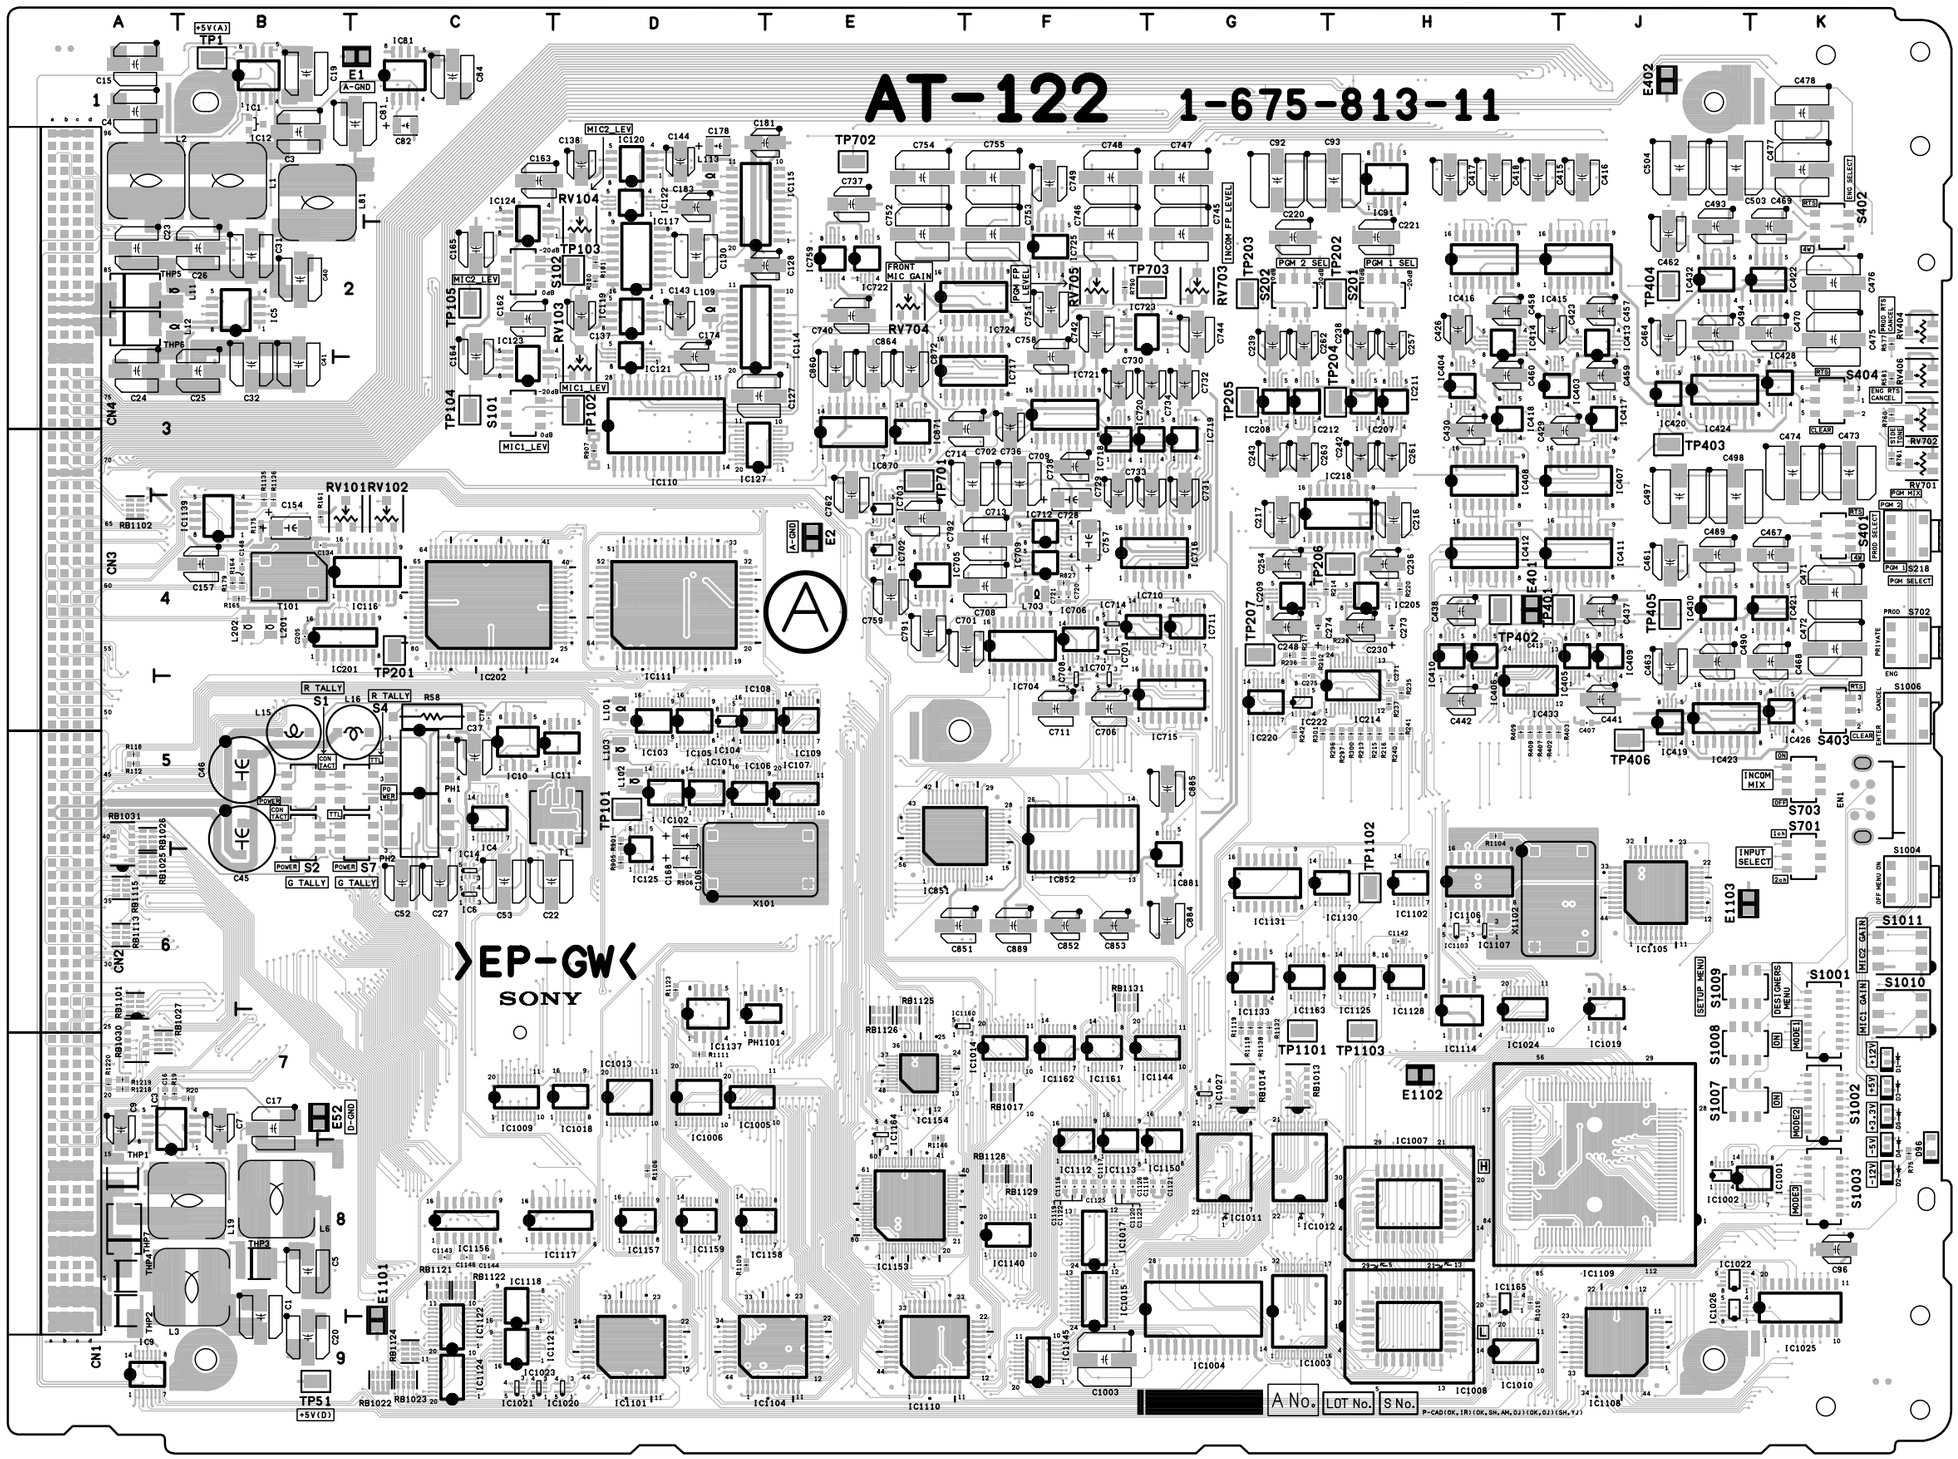

CCU-900 (UC) : S/N 10001 through 10010
CCU-900P (CE) : S/N 40001 through 40007

AT-122 -A SIDE-
SUFFIX: -11

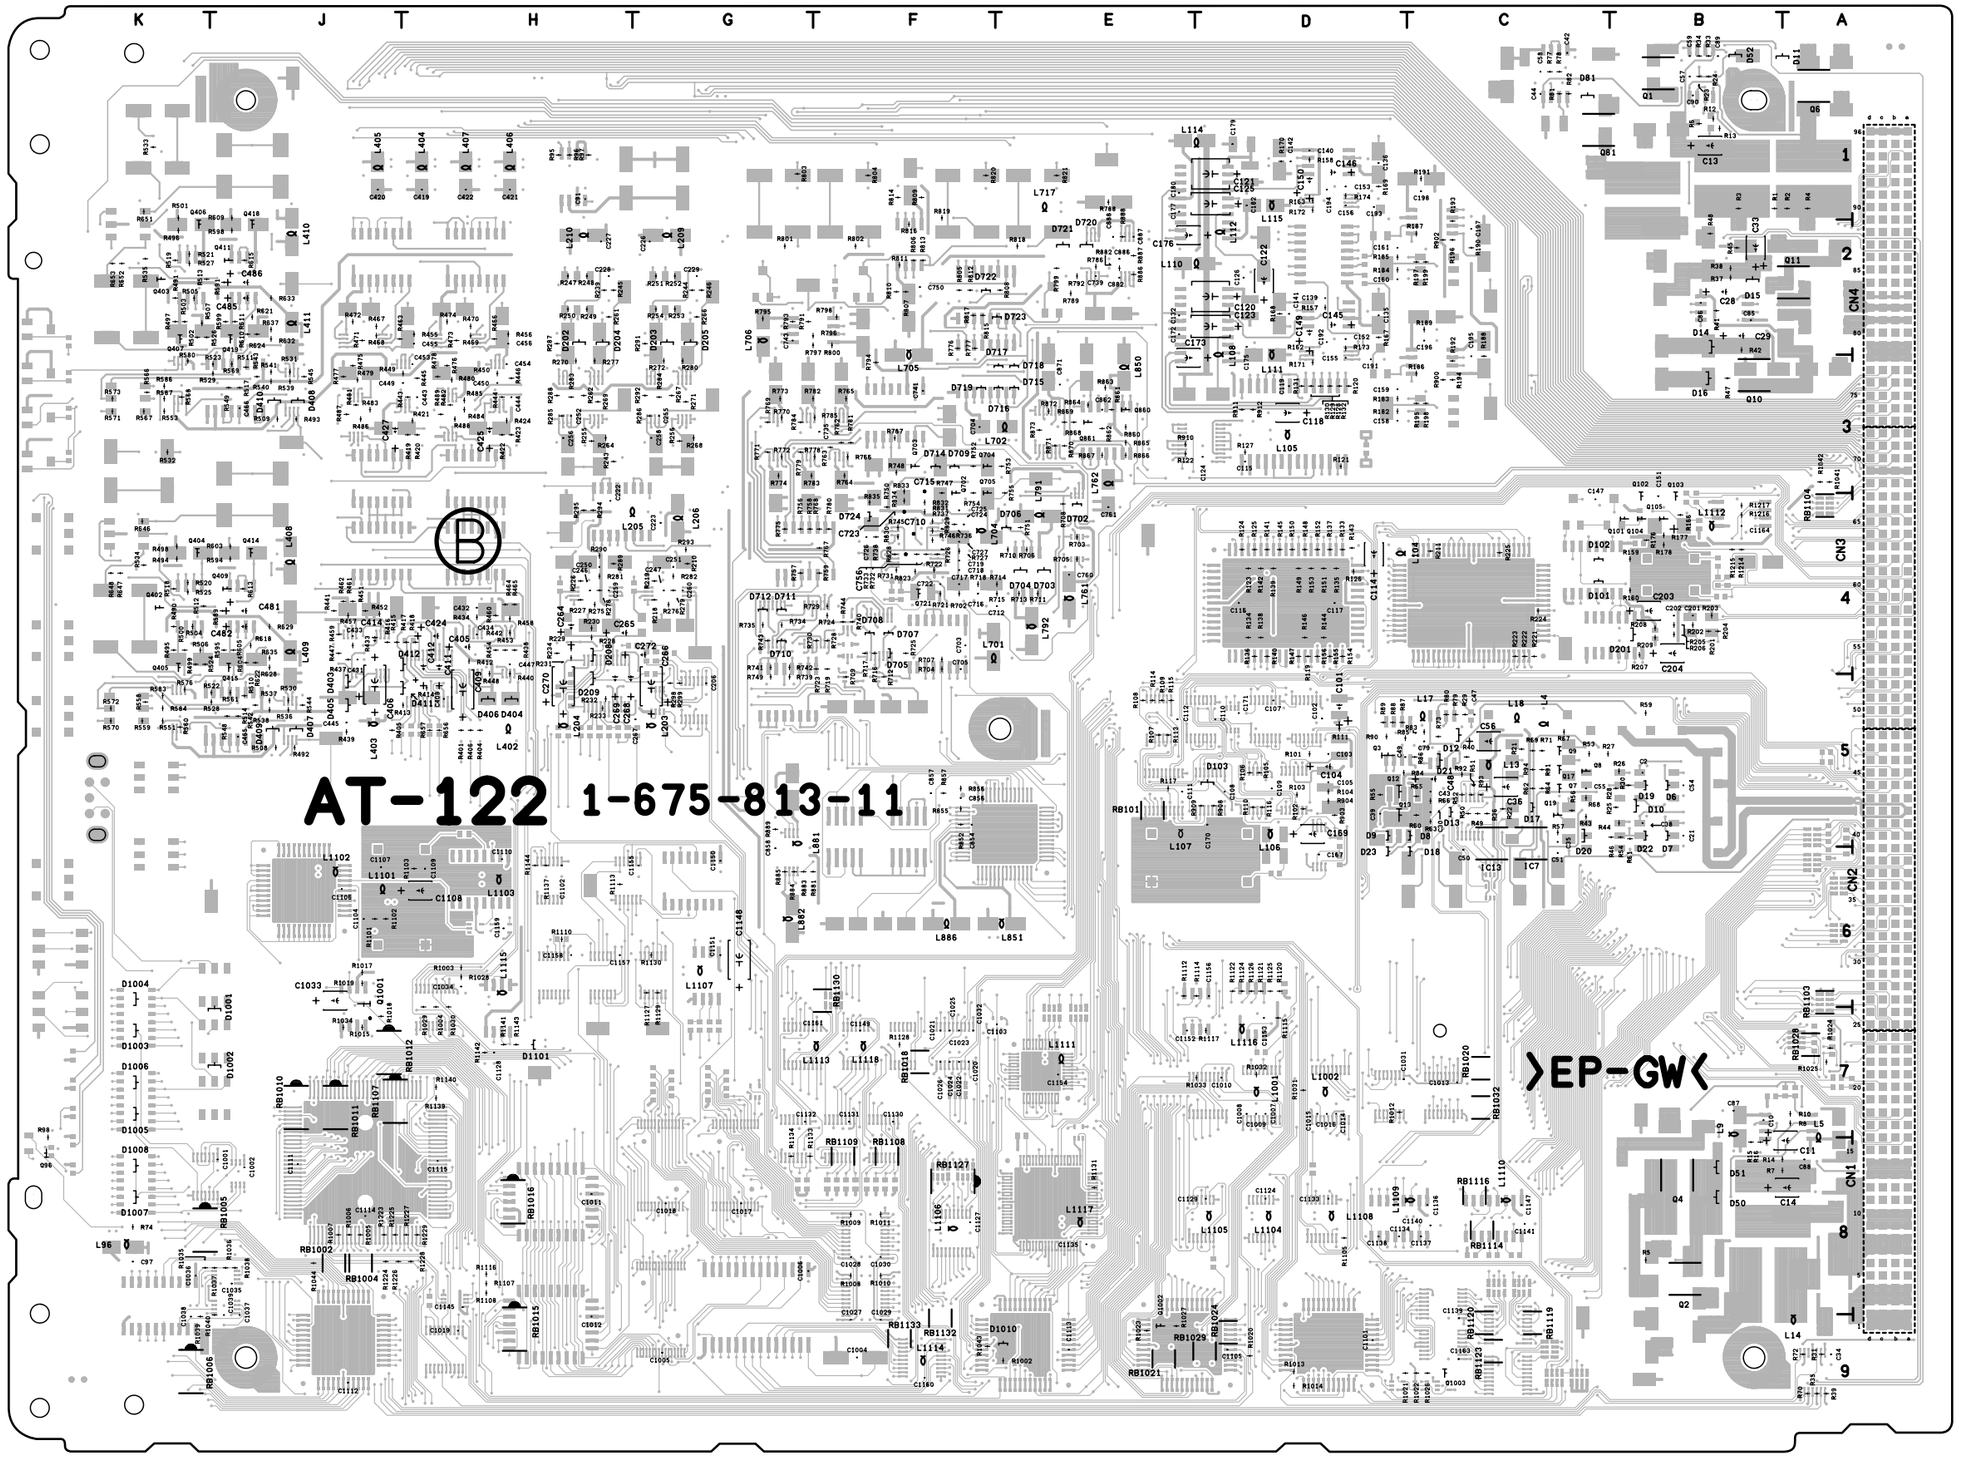

Components location list ; next page

AT-122 -B SIDE-
SUFFIX: -11

AT-122 (1-675-813-11)
---

*:B SIDE

C1	B9	C121	*D1	C247	*G4	C478	K1	C885	G5	C1147	*C8	D722	*F2	IC419	J5	IC1137	D7	L1103	*H6	R30	*B5	R124	*D4	R215	H5	R414	*H5	R514	*J5	R706	*E4
C2	*B5	C122	*D2	C248	G4	C481	*J4	C886	*E2	C1148	*G6	D723	*E2	IC420	J3	IC1139	B4	L1104	*D8	R31	*A9	R125	*D4	R216	H5	R415	*J4	R517	*J3	R707	*F4
C3	B1	C123	*D2	C250	*H4	C482	*J4	C887	*E2	C1149	*F7	D724	*F4	IC421	K4	IC1140	F8	L1105	*D8	R33	*B1	R126	*D4	R217	G4	R416	*J4	R518	*K4	R708	*E4
C4	A1	C124	*D3	C251	*G4	C485	*J2	C888	*E2	C1150	*G6	D1001	*J7	IC422	K2	IC1144	G7	L1106	*F8	R34	*B1	R127	*D3	R218	*G4	R417	*H4	R519	*K2	R709	*F5
C5	B8	C125	*D1	C252	*H3	C486	*J2	C889	F6	C1151	*G6	D1002	*J7	IC423	J5	IC1145	F9	L1107	*G6	R35	*A9	R128	*D3	R219	*G4	R418	*H4	R520	*K4	R710	*E4
C7	B7	C126	*D2	C254	G4	C489	J4	C1001	*J8	C1152	*E7	D1003	*K7	IC424	J3	IC1150	G8	L1108	*D8	R36	*C5	R129	*D3	R220	H4	R419	*H3	R521	*K2	R711	*E4
C9	A7	C127	D3	C255	*G3	C490	J4	C1002	*J8	C1153	*D7	D1004	*K6	IC426	K5	IC1153	E8	L1109	*C8	R37	*B2	R130	*D3	R221	*C4	R420	*H3	R522	*J5	R712	*F5
C10	*B7	C128	D2	C256	*H3	C493	J2	C1003	F9	C1154	*E7	D1005	*K7	IC428	K3	IC1154	E7	L1110	*C8	R38	*B2	R131	*D3	R222	*C4	R421	*H3	R523	*J3	R713	*E4
C11	*A8	C130	D2	C257	H2	C494	J2	C1004	*F9	C1155	*G6	D1006	*K7	IC430	J4	IC1156	C8	L1111	*E7	R39	*A9	R132	*D3	R223	*C4	R422	*H3	R524	*K4	R714	*E4
C13	*B1	C132	*E2	C258	*G3	C497	J4	C1005	*G9	C1156	*D6	D1007	*K8	IC432	J2	IC1157	D8	L1112	*B4	R40	*C5	R133	*D4	R224	*C4	R423	*H3	R525	*K4	R715	*E4
C14	*A8	C134	B4	C259	*H4	C498	J4	C1006	*G8	C1157	*H6	D1008	*K8	IC433	H5	IC1158	D8	L1113	*F7	R41	*B2	R134	*D4	R225	*C4	R424	*H3	R526	*K2	R716	*F4
C15	A1	C135	*D2	C260	*G4	C503	J1	C1007	*D7	C1158	*H6	D1010	*E9	IC701	F4	IC1159	D8	L1114	*F9	R42	*B2	R135	*D4	R226	*H4	R433	*J4	R527	*K2	R717	*F4
C16	A7	C136	*D1	C261	H3	C504	J1	C1008	*D7	C1159	*H6	D1101	*H7	IC702	E4	IC1160	E7	L1115	*H6	R43	*C5	R136	*D4	R227	*H4	R434	*H4	R528	*J5	R718	*F4
C17	B7	C137	D2	C262	G2	C701	F4	C1009	*D7	C1160	*F9			IC703	E4	IC1161	F7	L1116	*D7	R44	*B5	R137	*D4	R228	*H4	R437	*J4	R529	*J3	R719	*F4
C19	B1	C138	D1	C263	G3	C702	F3	C1010	*D7	C1161	*F7	E1	C1	IC704	F4	IC1162	F7	L1117	*E8	R45	*B2	R138	*D4	R229	*H4	R438	*H4	R530	*J5	R721	*F4
C20	B9	C139	*D2	C264	*H4	C703	*F4	C1011	*H8	C1163	*C9	E2	E4	IC705	E4	IC1163	G6	L1118	*F7	R46	*B5	R139	*D4	R230	*H4	R439	*J5	R531	*J3	R722	*F4
C21	*B5	C140	*D1	C265	*H4	C704	*F3	C1012	*H9	C1164	*B4	E52	B7	IC706	F4	IC1164	E7			R47	*B3	R140	*D4	R231	*H4	R440	*H5	R532	*K3	R723	*F4
C22	C6	C141	*D2	C266	*G5	C705	*F4	C1013	*C7			E401	H4	IC707	F5	IC1165	H8	PH1	C5	R48	*B2	R141	*D4	R232	*H5	R441	*J4	R533	*K1	R724	*F4
C23	A2	C142	*D1	C267	*G5	C706	F5	C1014	*D7	CN1	A8	E402	J1	IC708	F5			PH2	C5	R49	*C5	R142	*D4	R233	*H5	R442	*H4	R534	*K4	R725	*F4
C24	A3	C143	D2	C268	*H5	C708	F4	C1015	*D7	CN2	A6	E1101	C9	IC709	F4	L1	B1	PH1101	D7	R50	*C5	R143	*D4	R234	*H4	R443	*H3	R535	*K2	R726	*F4
C25	B3	C144	D1	C269	*H5	C709	F3	C1016	*D7	CN3	A4	E1102	H7	IC710	F4	L2	A1			R51	*C5	R144	*D4	R235	H5	R444	*H3	R536	*J5	R727	*F4
C26	B2	C145	*D2	C270	*H5	C710	*F4	C1017	*G8	CN4	A2	E1103	J6	IC711	G4	L3	B8	Q1	*B1	R52	*C5	R145	*D4	R236	G4	R445	*H3	R537	*J5	R728	*F4
C27	C6	C146	*D1	C271	H5	C711	F5	C1018	*G8					IC712	F4	L4	*C5	Q2	*B8	R53	*C5	R146	*D4	R237	H5	R446	*H3	R538	*J5	R729	*F4
C28	*B2	C147	*C4	C272	*G4	C712	*E4	C1019	*H9	D1	K7	EN1	K5	IC714	F4	L5	*A8	Q3	*D5	R54	*B5	R147	*D4	R238	G4	R447	*J4	R539	*J3	R730	*F4
C29	*B2	C148	B4	C273	H4	C713	F4	C1020	*F7	D2	K8			IC715	G5	L6	B8	Q4	*B8	R55	*D5	R148	*D4	R239	*H2	R448	*H5	R540	*J3	R731	*F4
C30	*C5	C149	*D2	C274	G4	C714	F3	C1021	*F7	D3	K7	IC1	B1	IC716	G4	L9	*B7	Q6	*A1	R56	*C5	R149	*D4	R240	H5	R449	*H3	R541	*J3	R732	*F4
C31	B2	C150	*D1	C275	G5	C715	*F3	C1022	*F7	D4	K8	IC3	A7	IC717	F3	L11	A2	Q7	*C5	R57	*C5	R150	*D4	R241	H5	R450	*H3	R542	*J5	R733	*F4
C32	B3	C151	*B4	C405	*H4	C716	*F4	C1023	*F7	D5	K7	IC4	C5	IC718	F3	L12	A2	Q8	*C5	R58	C5	R151	*D4	R242	G5	R451	*J4	R543	*J3	R734	*G4
C33	*B2	C152	*D2	C406	*J5	C717	*F4	C1024	*F7	D6	*B5	IC5	B2	IC719	G3	L13	*C5	Q9	*C5	R59	*B5	R152	*D4	R243	*H3	R452	*J4	R544	*J5	R735	*G4
C34	*A9	C153	*D1	C407	J5	C718	*F4	C1025	*F7	D7	*B5	IC6	C6	IC720	G3	L14	*A9	Q10	*B3	R60	*C5	R153	*D4	R244	*G2	R453	*H4	R545	*J3	R736	*F4
C35	*C5	C154	B4	C408	*H5	C719	*F4	C1026	*F7	D8	*C5	IC7	*C5	IC721	F3	L15	B5	Q11	*A2	R61	*B5	R154	*D4	R245	*H2	R454	*H4	R548	*J5	R737	*F4
C36	*C5	C155	*D3	C409	*H5	C720	F4	C1027	*F9	D9	*D5	IC9	A9	IC722	E2	L16	C5	Q12	*D5	R62	*C5	R155	*D4	R246	*G2	R455	*H2	R549	*J3	R738	*F4
C37	C5	C156	*D1	C411	*H4	C721	F4	C1028	*F8	D10	*B5	IC10	C5	IC723	F2	L17	*C5	Q13	*D5	R63	*C5	R156	*D4	R247	*H2	R456	*H2	R551	*K5	R739	*G5
C38	*B5	C157	B4	C412	*H4	C722	*F4	C1029	*F9	D11	*A1	IC11	D5	IC724	F2	L18	*C5	Q17	*C5	R64	*C5	R157	*D2	R248	*H2	R457	*J4	R553	*K3	R740	*F4
C39	*D5	C158	*D3	C413	H4	C723	*F4	C1030	*F8	D12	*C5	IC12	B1	IC725	F2	L19	B8	Q19	*C5	R65	*C5	R158	*D1	R249	*H2	R458	*H4	R558	*K5	R741	*G4
C40	B2	C159	*D3	C414	*J4	C724	*F4	C1031	*D7	D13	*C5	IC13	*C5	IC759	E2	L81	B1	Q81	*C1	R66	*C5	R159	*B4	R250	*H2	R459	*J4	R559	*K5	R742	*G4
C41	B3	C160	*D2	C415	H1	C725	*F4	C1032	*F7	D14	*B2	IC14	C6	IC851	E5	L96	*K8	Q96	*K8	R67	*C5	R160	*B4	R251	*G2	R460	*H4	R560	*K5	R743	*G4
C42	*C1	C161	*D2	C416	J1	C726	*F4	C1033	*J6	D15	*B2	IC81	C1	IC852	F5	L101	D5	Q101	*B4	R68	*C5	R161	B4	R252	*G2	R461	*J4	R561	*J5	R744	*F4
C43	*C5	C162	C2	C417	H1	C727	*F4	C1034	*H6	D16	*B3	IC91	H1	IC870	E3	L102	D5	Q102	*B4	R69	*C5	R162	*D2	R253	*G2	R462	*J4	R566	*K3	R745	*F4
C44	*C1	C163	C1	C418	H1	C728	F4	C1035	*J8	D17	*C5	IC101	D5	IC871	E3	L103	D5	Q103	*B4	R70	*A9	R163	*D1	R254	*G2	R463	*J2	R567	*K3	R746	*F4
C45	B5	C164	C3	C419	*H1	C729	F3	C1036	*K8	D18	*C6	IC102	D5	IC881	G6	L104	*D4	Q104	*B4	R71	*C5	R164	B4	R255	*H3	R464	*H4	R568	*K3	R747	*F4
C46	B5	C165	C2	C420	*J1	C730	F3	C1037	*J9	D19	*B5	IC103	D5	IC1001	K8	L105	*D3	Q105	*B4	R72	*A9	R165	B4	R256	*G3	R465	*H4	R569	*J3	R748	*F3
C47	*C5	C167	*D6	C421	*H1	C731	G3	C1038	*K9	D20	*C5	IC104	D5	IC1002	J8	L106	*D5	Q402	*K4	R73	*C5	R166	*B4	R261	*H2	R466	*H2	R570	*K5	R749	*G5
C48	*C5	C168	D6	C422	*H1	C732	G3	C1039	*J9	D21	*C5	IC105	D5	IC1003	G8	L107	*E5	Q403	*K2	R74	*K8	R167	*D2	R262	*H3	R467	*J2	R571	*K3	R750	*F4
C49	*D5	C169	*D5	C423	H2	C733	G3	C1101	*D9	D22	*B5	IC106	D5	IC1004	G8	L108	*D3	Q404	*K4	R75	K8	R168	*D2	R264	*H3	R468	*J2	R572	*K5	R751	*E4
C50	*C6	C170	*D5	C424	*H4	C734	G3	C1102	*H6	D23	*D6	IC107	E5	IC1005	D7	L109	D2	Q405	*K4	R77	*C1	R169	*D1	R266	*G2	R469	*H2	R573	*K3	R752	*F3
C51	*C6	C171	*D5	C425	*H3	C735	*F3	C1103	*E7	D50	*B8	IC108	D5	IC1006	D7	L110	*D2	Q406	*K2	R78	*C1	R170	*D1	R267	*G3	R470	*H2	R576	*K5	R753	*E3
C52	C6	C172	*E2	C426	H2	C736	F3	C1104	*J6	D51	*B8	IC109	E5	IC1007	H8	L111	*D3	Q407	*K2	R79	*C5	R171	*D3	R268	*G3	R471	*J2	R577	K2	R754	*F4
C53	C6	C173	*E3	C427	*J3	C737	E1	C1105	*D9	D52	*B1	IC110	D3	IC1008	H9	L112	*D2	Q409	*J4	R80	*C5	R172	*D1	R269	*H3	R472	*J2	R580	*K3	R755	*E4
C54	*B5	C174	D3	C429	J3	C738	F3	C1106	*J6	D81	*C1	IC111	D4	IC1009	C7	L113	D1	Q411	*J2	R81	*C1	R173	*D2	R270	*H3	R473	*H2	R581	K3	R756	*G4
C55	*C5	C175	*D2	C430	H3	C739	*E2	C1107	*J6	D96	K8	IC114	D2	IC1010	H9	L114	*D1	Q414	*J4	R82	*C1	R174	*D1	R271	*G3	R474	*H2	R583	*K5	R757	*G4
C56	*C5	C176	*E2	C431	*J4	C740	E2	C1108	*H6	D101	*C4	IC115	D1	IC1011	G8	L115	*D1	Q415	*J4	R83	*C5	R175	B4	R272	*G3	R475	*J3	R584	*K5	R758	*G4
C57	*B1	C177	*E1	C432	*H4	C741	*F3	C1109	*H6	D102	*C4	IC116	C4	IC1012	G8	L201	B4	Q418	*J2	R84	*D5	R176	*B4	R275	*H4	R476	*H3	R586	*K3	R759	*F4
C58	*C1	C178	D1	C433	*J4	C742	F2	C1110	*H6	D103	*D5	IC117	D2	IC1013	D7	L202	B4	Q419	*J2	R85	*D5	R177	*B4	R276	*G4	R477	*J3	R587	*K3	R760	K3
C59	*B1	C179	*D1	C434	*H4	C743	*G2	C1111	*J8	D201	*B4	IC119	D2	IC1014	F7	L203	*G5	Q702	*F4	R86	*C5	R178	*B4	R277	*H3	R478	*H3	R589	*J4	R761	K3
C78	C5	C180	*E1	C437	J4	C744	G2	C1112	*J9	D202	*H2	IC120	D1	IC1015	F8	L204	*H5	Q703	*F3	R87	*D5	R179	B4	R278	*H4	R479	*J3	R591	*J2	R762	*F3
C79	*C5	C181	D1	C438	H4	C745	G2	C1113	*E9	D203	*G2	IC121	D2	IC1017	F8	L205	*G4	Q704	*F3	R88	*D5	R180	D2	R279	*G4	R480	*H3	R594	*J4	R763	*F3
C81	C1	C182	*D1	C441	J5	C746	F2	C1114	*J8	D204	*H2	IC122	D1	IC1018	D7	L206	*G4	Q705	*F4	R89	*D5	R181	D2	R280	*G3	R481	*J3	R595	*J4	R764	*F3
C82	C1	C183	D1	C442	H5	C747	G1	C1115	*H8	D205	*G2	IC123	C3	IC1019	J6	L209	*G2	Q721	*F4	R90	*D5	R182	*D3	R281	*H4	R482	*H3	R598	*J2	R765	*F3
C84	C1	C191	*D3	C443	*H3	C748	F1	C1116	F8	D208	*H4	IC124	C2	IC1020	D9	L210	*H2	Q860	*E3	R91	*C5	R183	*D3	R282	*G4	R483	*J3	R599	*J2	R766	*F3
C85	*B2	C192	*D2	C444	*H3	C749	F1	C1117	F8	D209	*H5	IC125	D6	IC1021	C9	L402	*H5	Q861	*E3	R92	*C5	R184	*D2	R283	*H3	R484	*H3	R603	*J4	R767	*F4
C86	*B2	C193	*D1	C445	*J5	C750	*F2	C1118	G8	D403	*J5	IC127	D3	IC1022	J8	L403	*J5	Q1001	*J6	R93	*C5	R185	*D2	R284	*G3	R485	*H3	R604	*J4	R768	*F4
C87	*B7	C194	*D1	C447	*H4	C751	F2	C1119	F8	D404	*H5	IC201	B4	IC1023	C9	L404	*H1	Q1002	*E9	R94	*C5	R186	*C3	R285	*H3	R486	*J3	R605	*J4	R769	*G3
C88	*A8	C195	*C3	C449	*H3	C752	E2	C1120	F8	D405	*J5	IC202	C4	IC1024	H7	L405	*J1	Q1003	*C9	R95	*H1	R187	*C2	R286	*G3	R487	*J3	R609	*J1	R770	*G3
C89	*B1	C196	*C2	C450	*H3	C753	F2	C1121	G8	D406	*H5	IC205	H4	IC1025	K8	L406	*H1			R96	*H1	R188	*C3	R287	*H2	R488	*H3	R610	*J2	R771	*G3
C90	*B1	C197	*C2	C453	*H3	C754	E1	C1122	F8	D407	*J5	IC207	H3	IC1026	J8	L407	*H1	R1	*B1	R97	*H1	R189	*C2	R288	*H3	R489	*H3	R611	*J2	R772	*G3
C91	*H1	C198	*C1	C454	*H3	C755	F1	C1123	F8	D408	*J3	IC208	G3	IC1027	G7	L408	*J4	R2	*A1	R98	*K8	R190	*C2	R289	*H4	R490	*K4	R613	*J4	R773	*G3
C92	G1	C201	*B4	C455	*H2	C756	*F4	C1124	*D8	D409	*J5	IC209	G4	IC1101	D9	L409	*J4	R3	*B1	R101	*D5	R191	*C1	R290	*H4	R491	*K2	R615	*J2	R774	*G3
C93	H1	C202	*B4	C456	*H2	C757	F4	C1125	F8	D410	*J3	IC211	H3	IC1102	H6	L410	*J2	R4	*A1	R102	*D5	R192	*C3	R291	*G2	R492	*J5	R618	*J4	R775	*G4
C96	K8	C203	*B4	C457	J2	C758	F3	C1126	F8	D411	*H5	IC212	G3	IC1103	H6	L411	*J2	R5	*B8	R103	*D5	R193	*C2	R292	*G3	R493	*J3	R621	*J2	R776	*F2
C97	*K8	C204	*B4	C458	H2	C759	E4	C1127	*F8	D412	*H4	IC214	H5	IC1104	E9	L701	*F4	R6	*B1	R104	*D5	R194	*C3	R293	*G4	R494	*K4	R622	*J4	R777	*F2
C101	*D5	C205	B4	C459	J3	C760	*E4	C1128	*H7	D702	*E4	IC218	H4	IC1105	J6	L702	*E3	R7	*A8	R105	*D5	R195	*C3	R294	*H4	R495	*K4	R624	*J2	R778	*F3
C102	*D5	C206	*G5	C460	H3	C761	*E4	C1129	*D8	D703	*E4	IC220	G5	IC1106	H6	L703	F4	R8	*A7	R106	*D5	R196	*C2	R295	*H4	R496	*K2	R628	*J4	R779	*G3
C103	*D5	C216	H4	C461	J4	C762	E4	C1130	*F7	D704	*E4	IC222	G5	IC1107	H6	L704	*F4	R10	*A7	R107	*E5	R197	*C2	R296	H5	R497	*K2	R629	*J4	R780	*F4
C104	*D5	C217	G4	C462	J2	C791	E4	C1131	*F7	D705	*F4	IC403	H3	IC1108	J9	L705	*F3	R12	*B1	R108	*E5	R198	*C3	R297	H5	R498	*K4	R632	*J2	R781	*F3
C105	*D5	C220	G2	C463	J4	C792	E4	C1132	*G7	D706	*E4	IC404	H3	IC1109	J8	L706	*G2	R13	*B1	R109	*E5	R199	*C2	R298	*G5	R499	*K4	R633	*J2	R782	*F3
C106	D5	C221	H2	C464	J2	C851	E6	C1133	*D8	D707	*F4	IC405	J4	IC1110	E9	L717	*E1	R14	*A8	R110	*D5	R201	*B4	R299	*G5	R500	*K4	R635	*J4	R783	*G3
C107	*D5	C222	*H4	C465	*J5	C852	F6	C1134	*D8	D708	*F4	IC406	H4	IC1112	F8	L761	*E4	R15	*B8	R111	*D5	R202	*B4	R300	H5	R501	*K1	R637	*J2	R784	*G3
C108	*D5	C223	*G4	C466	*J3	C853	F6	C1135	*E8	D709	*F3	IC407	J3	IC1113	F8	L762	*E3	R16	*B8	R112	A5	R203	*B4	R301	G5	R502	*K2	R646	*K4	R785	*F3
C109	*D5	C226	*G2	C467	K4	C854	*F5	C1136	*C8	D710	*G4	IC408	H3	IC1114	H7	L791	*E4	R19	A7	R113	*E5	R204	*B4	R401	*H5	R503	*K2	R647	*K4	R786	*E2
C110	*D5	C227	*H2	C468	K4	C856	*F5	C1137	*C8	D711	*G4	IC409	J4	IC1117	D8	L792	*E4	R20	B7	R114	*E5	R205	*B4	R402	H5	R504	*K4	R648	*K4	R787	*F3
C111	*E5	C228	*H2	C469	K2	C857	*F5	C1138	*D8	D712	*G4	IC410	H4	IC1118	C8	L850	*E3	R21	*C5	R115	*E5	R206	*B4	R403	H5	R505	*K2	R651	*K1	R788	*E1
C112	*E5	C229	*G2	C470	K2	C858	*G6	C1139	*C9	D714	*F3	IC411	J4	IC1121	C9	L851	*E6	R22	*C5	R116	*D5	R207	*B4	R404	*H5	R506	*K4	R652	*K2	R789	*E2
C114	*D4	C230	H4	C471	K4	C860	E3	C1140	*C8	D715	*E3	IC412	H4	IC1122	C9	L881	*G5	R23	*B1	R117	*E5	R208	*B4	R405	*J5	R507	*K2	R653	*K2	R790	F2
C115	*D3	C236	H4	C472	K4	C862	*E3	C1141	*C8	D716	*E3	IC413	J2	IC1124	C9	L882	*G6	R24	*B1	R118	A5	R209	*B4	R406	*H5	R508	*J5	R656	*H5	R791	*G2
C116	*D4	C238	H2	C473	K3	C864	E3	C1142	H6	D717	*E3	IC414	H2	IC1125	H6	L886	*F6	R25	*B5	R119	*D4	R210	*G4	R407	H5	R509	*J3	R657	*H5	R792	*E2
C117	*D4	C239	G2	C474	K3	C871	*E3	C1143	C8	D718	*E3	IC415	J2	IC1128	H6	L1001	*D7	R26	*B5	R120	*D3	R211	*C4	R408	H5	R510	*J5	R702	*F4	R793	*G2
C118	*D3	C242	H3	C475	K2	C872	E3	C1144	C8	D719	*F3	IC416	H2	IC1130	H6	L1002	*D7	R27	*C5	R121	*D3	R212	G4	R409	H5	R511	*J3	R703	*E4	R794	*F3
C119	*D3	C243	G3	C476	K2	C882	*E2	C1145	*H8	D720	*E2	IC417	J3	IC1131	G6	L1101	*J6	R28	*B5	R122	*E3	R213	H5	R412	*H4	R512	*K4	R704	*F4	R795	*G2
C120	*D2	C246	*H4	C477	K1	C884	G6	C1146	C8	D721	*E2	IC418	H3	IC1133	G6	L1102	*J6	R29	*C5	R123	*D4	R214	G4	R413	*H5	R513	*K2	R705	*E4	R796	*F2

R797	*F2	R1017	*J6	RB1004	*J8	T1	D5
R798	*F2	R1018	*J7	RB1005	*K8	T101	B4
R799	*E2	R1019	*J6	RB1006	*K9		
R800	*F2	R1020	*D9	RB1010	*J7	THP1	A8
R801	*G2	R1021	*D9	RB1011	*J7	THP2	A8
R802	*F2	R1022	*C9	RB1012	*J7	THP3	B8
R803	*G1	R1023	*E9	RB1013	G7	THP4	A8
R804	*F1	R1024	*A7	RB1014	G7	THP5	A2
R805	*F2	R1025	*A7	RB1015	*H9	THP6	A2
R806	*F2	R1026	*C9	RB1016	*H8	THP7	A8
R807	*F2	R1027	*E9	RB1017	F7		
R808	*E2	R1028	*H6	RB1018	*F7	TP1	B1
R809	*F1	R1029	*H7	RB1020	*C7	TP51	B9
R810	*F2	R1030	*H7	RB1021	*E9	TP101	D5
R811	*F2	R1031	*D7	RB1022	C9	TP102	D3
R812	*F2	R1032	*D7	RB1023	C9	TP103	D2
R813	*F2	R1033	*D7	RB1024	*D9	TP104	C3
R814	*F1	R1034	*J7	RB1025	A6	TP105	C2
R815	*F2	R1035	*K8	RB1026	A5	TP201	C4
R816	*F2	R1036	*J8	RB1027	A7	TP202	H2
R817	*F2	R1037	*J8	RB1028	*A7	TP203	G2
R818	*E2	R1038	*J8	RB1029	*D9	TP204	H3
R819	*F1	R1039	*K9	RB1030	A7	TP205	G3
R820	*F1	R1040	*J9	RB1031	A5	TP206	H4
R821	*E1	R1041	*A3	RB1032	*C7	TP207	G4
R823	*F4	R1042	*A3	RB1101	A6	TP401	J4
R827	F4	R1043	*F9	RB1102	A4	TP402	H4
R828	*F4	R1044	*J8	RB1103	*A6	TP403	J3
R829	*F4	R1101	*J6	RB1104	*A4	TP404	J2
R830	*F4	R1102	*J6	RB1107	*J7	TP405	J4
R831	*F4	R1103	*H6	RB1108	*F8	TP406	J5
R832	*F4	R1104	H5	RB1109	*F8	TP701	E3
R833	*F3	R1105	*D8	RB1113	A6	TP702	E1
R834	*F4	R1106	D8	RB1114	*C8	TP703	G2
R835	*F4	R1107	*H8	RB1115	A6	TP1101	G7
R852	*F5	R1108	*H8	RB1116	*C8	TP1102	H6
R855	*F5	R1109	D8	RB1119	*C9	TP1103	H7
R856	*F5	R1110	*H6	RB1120	*C9		
R857	*F5	R1111	D7	RB1121	C8	X101	D6
R860	*E3	R1112	*E6	RB1122	C8	X1102	H6
R861	*E3	R1113	*H6	RB1123	*C9		
R862	*E3	R1114	*D6	RB1124	C9		
R863	*E3	R1115	*D7	RB1125	E7		
R864	*E3	R1116	*H8	RB1126	E7		
R865	*E3	R1117	*D7	RB1127	*F8		
R866	*E3	R1118	G7	RB1128	F8		
R867	*E3	R1119	G7	RB1129	F8		
R868	*E3	R1120	*D6	RB1130	*F6		
R869	*E3	R1121	*D6	RB1131	F6		
R870	*E3	R1122	*D6	RB1132	*F9		
R871	*E3	R1123	D6	RB1133	*F9		
R872	*E3	R1124	*D6				
R873	*E3	R1125	*D6	RV101	B4		
R881	*F6	R1126	*D6	RV102	C4		
R882	*E2	R1127	*G6	RV103	D3		
R883	*G6	R1128	*F7	RV104	D2		
R884	*G6	R1129	*G6	RV404	K2		
R885	*G6	R1130	*G6	RV406	K3		
R886	*E2	R1131	*E8	RV701	K3		
R887	*E2	R1132	G7	RV702	K3		
R888	*E2	R1133	*G8	RV703	G2		
R889	*G5	R1134	*G8	RV704	E2		
R900	*C3	R1135	B4	RV705	F2		
R901	D5	R1136	B4				
R902	*C2	R1137	*H6	S1	B5		
R903	*D5	R1138	G7	S2	B5		
R904	*D5	R1139	*H7	S4	C5		
R905	D6	R1140	*H7	S7	C5		
R906	D6	R1141	*H7	S101	C3		
R907	D3	R1142	*H7	S102	C2		
R908	*D5	R1143	*H7	S201	H2		
R909	*D5	R1144	*H6	S202	G2		
R910	*E3	R1146	E7	S218	K4		
R911	*D3	R1214	*B4	S401	K4		
R912	*D3	R1215	*B4	S402	K2		
R1002	*E9	R1216	*B4	S403	K5		
R1003	*H6	R1217	*B4	S404	K3		
R1004	*H7	R1218	A7	S701	K6		
R1005	*J8	R1219	A7	S702	K4		
R1006	*J8	R1220	A7	S703	K5		
R1007	*J8	R1223	*J8	S1001	K7		
R1008	*F8	R1224	*J8	S1002	K7		
R1009	*F8	R1225	*J8	S1003	K8		
R1010	*F8	R1226	*J8	S1004	K6		
R1011	*F8	R1227	*H8	S1006	K5		
R1012	*D7	R1228	*H8	S1007	J7		
R1013	*D9	R1229	*H8	S1008	J7		
R1014	*D9			S1009	J6		
R1015	*J7	RB101	*E5	S1010	K7		
R1016	H8	RB1002	*J8	S1011	K6		

```
---------------------
MB-647 (1-675-812-13)
---------------------

*:B SIDE

CN1    *E3
CN2     A4
CN3     E4
CN4     A4
CN11   *D1
CN12   *C1
CN13   *B1
CN14   *A1
CN15   *A1
CN16   *A1
CN21   *D2
CN22   *C2
CN23   *B2
CN24   *A2
CN25   *A2
CN26   *A2
CN31   *D3
CN32   *C3
CN33   *B3
CN34   *A3
CN35   *A3
CN36   *A3
CN41   *D4
CN42   *C4
CN43   *B4
CN44   *A4
CN45   *A4
CN46   *A4
```

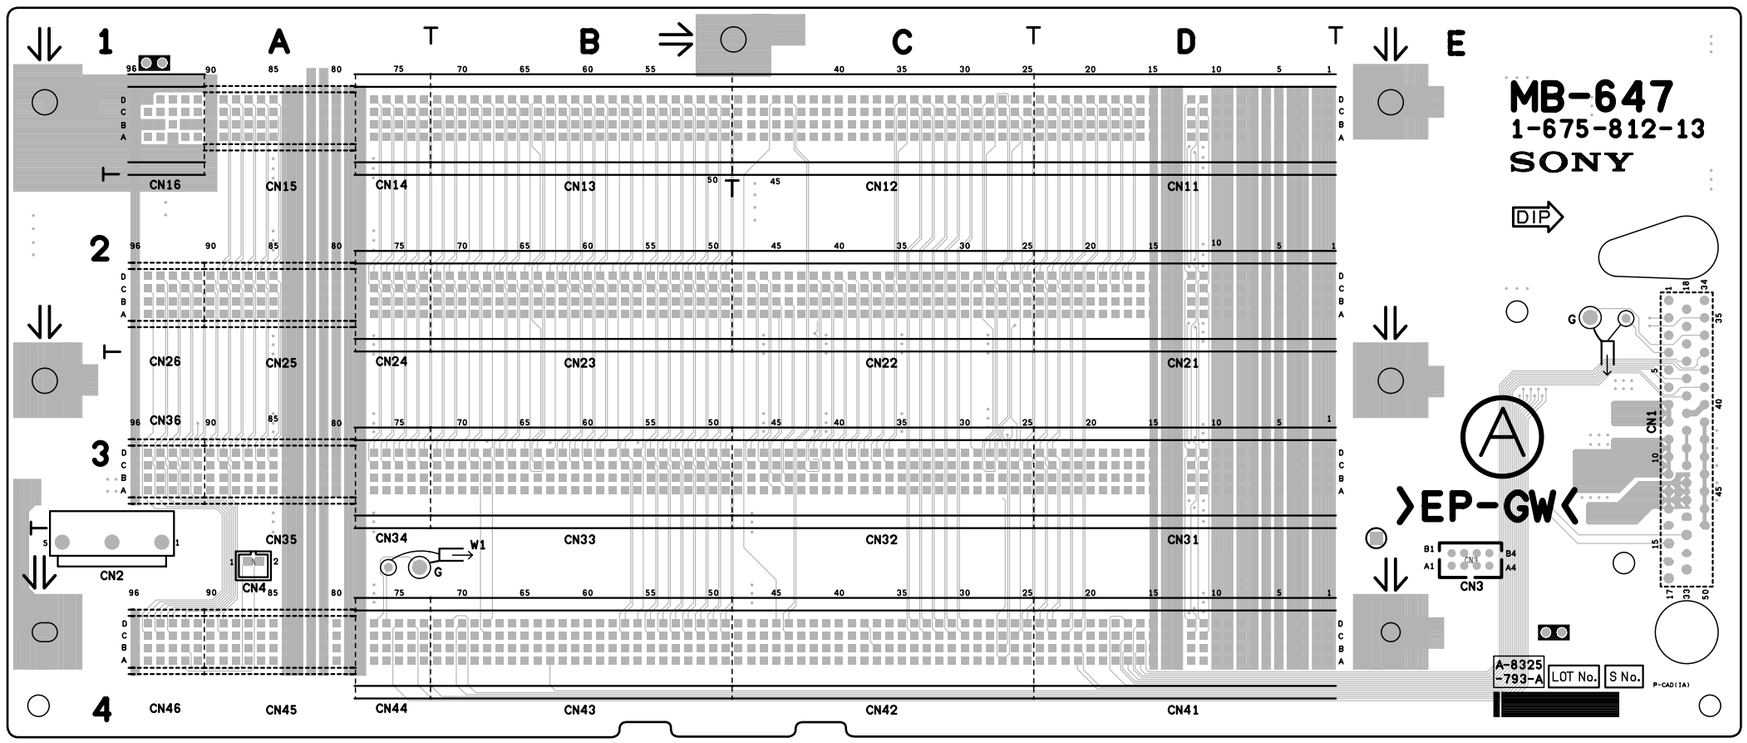

CCU-900 (UC) : S/N 10011 and Higher
CCU-900 (J) : S/N 30001 and Higher
CCU-900P (CE) : S/N 40008 and Higher

MB-647 -A SIDE-
SUFFIX: -13

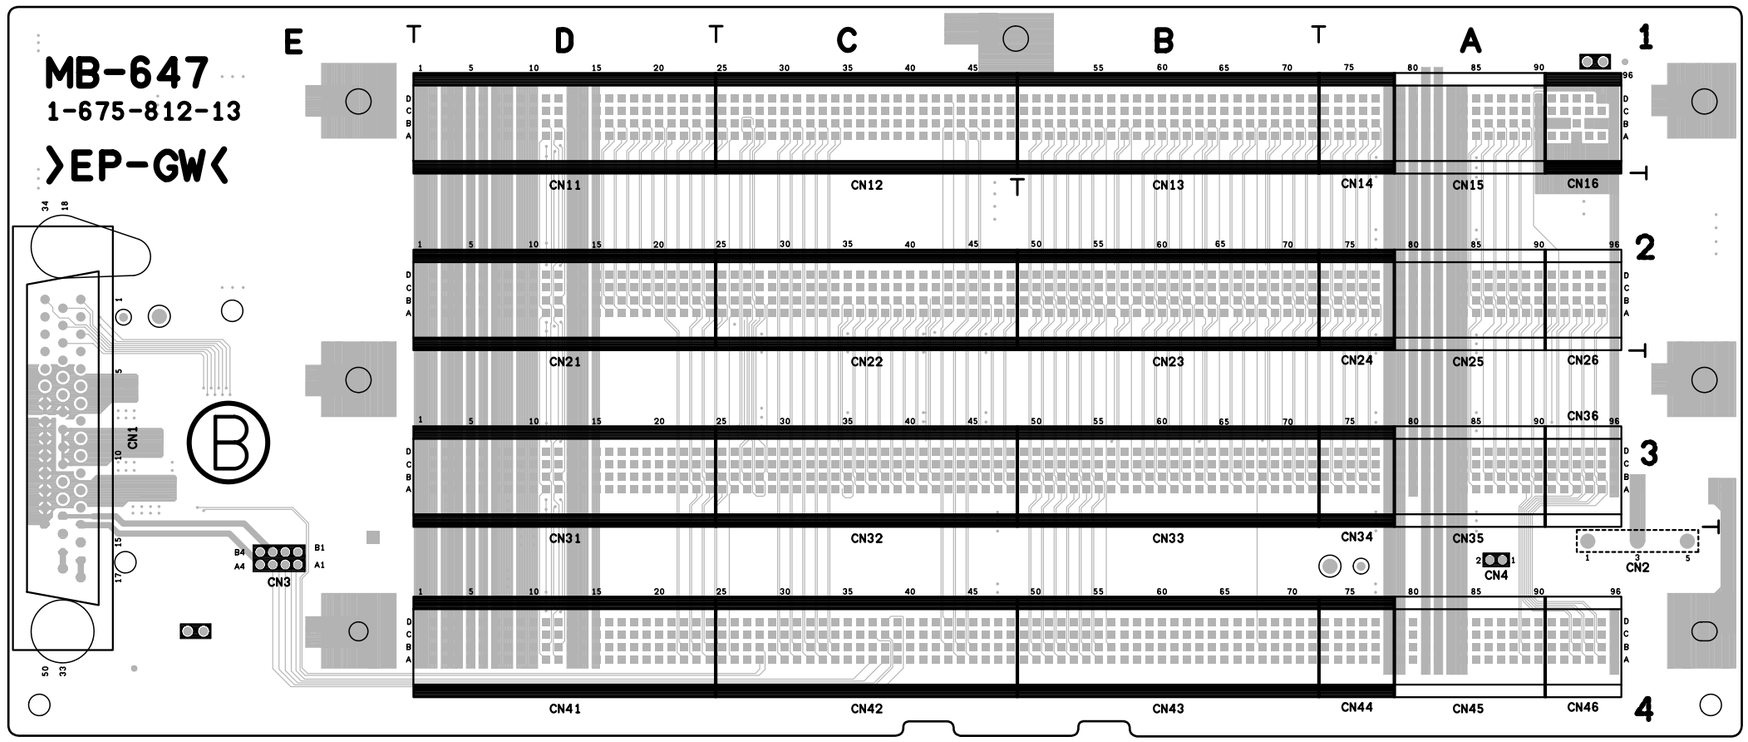

MB-647 -B SIDE-
SUFFIX: -13

```
---------------------
MB-647 (1-675-812-12)
---------------------

*:B SIDE

CN1    *E3
CN2     A4
CN3     E4
CN4     A4
CN11   *D1
CN12   *C1
CN13   *B1
CN14   *A1
CN15   *A1
CN16   *A1
CN21   *D2
CN22   *C2
CN23   *B2
CN24   *A2
CN25   *A2
CN26   *A2
CN31   *D3
CN32   *C3
CN33   *B3
CN34   *A3
CN35   *A3
CN36   *A3
CN41   *D4
CN42   *C4
CN43   *B4
CN44   *A4
CN45   *A4
CN46   *A4
```

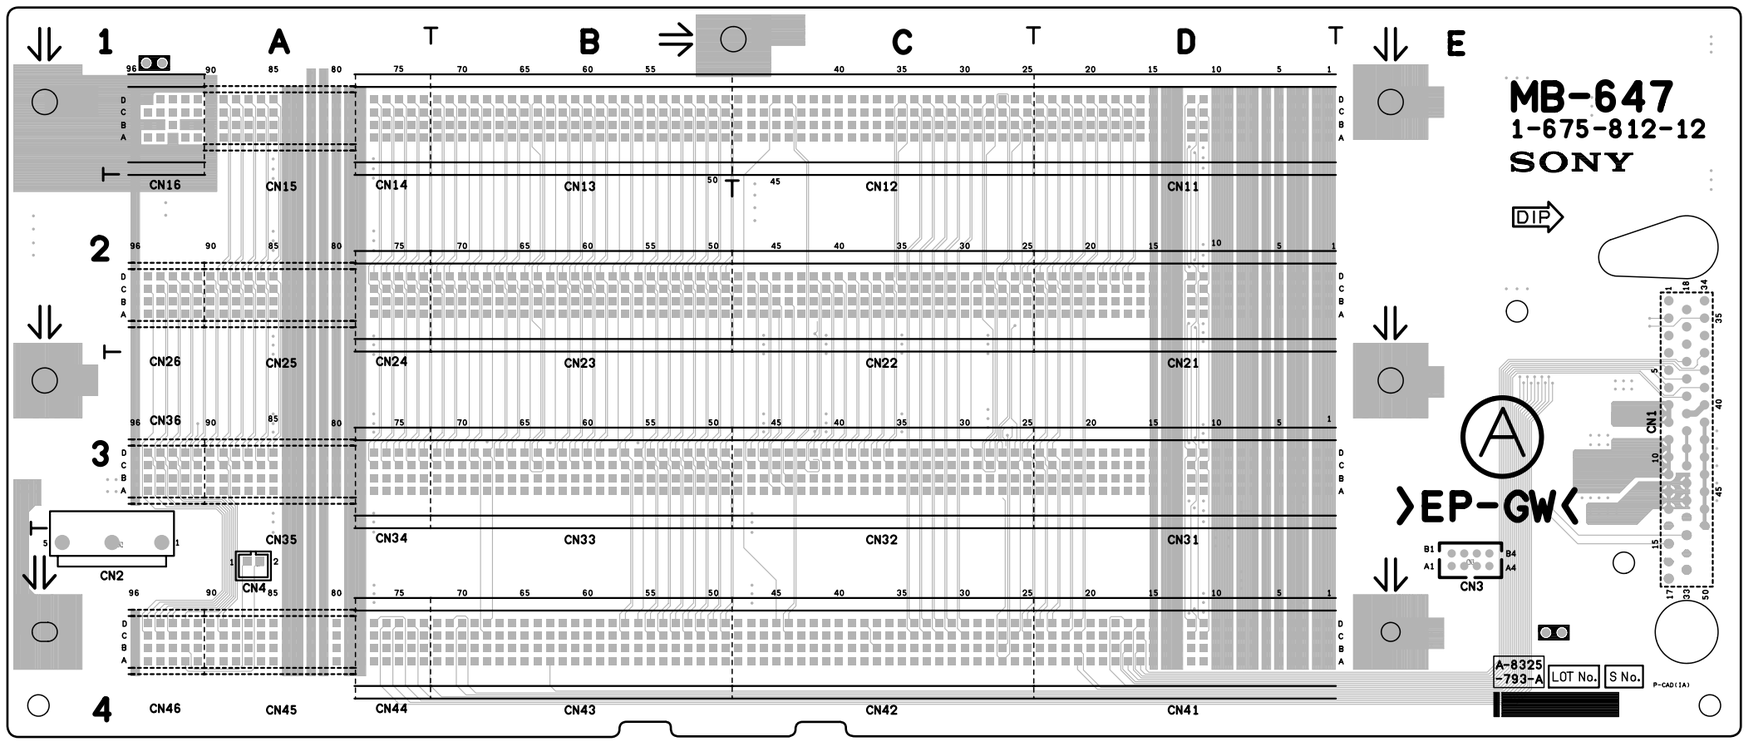

CCU-900 (UC) : S/N 10001 through 10010
CCU-900P (CE) : S/N 40001 through 40007

MB-647 -A SIDE-
SUFFIX: -12

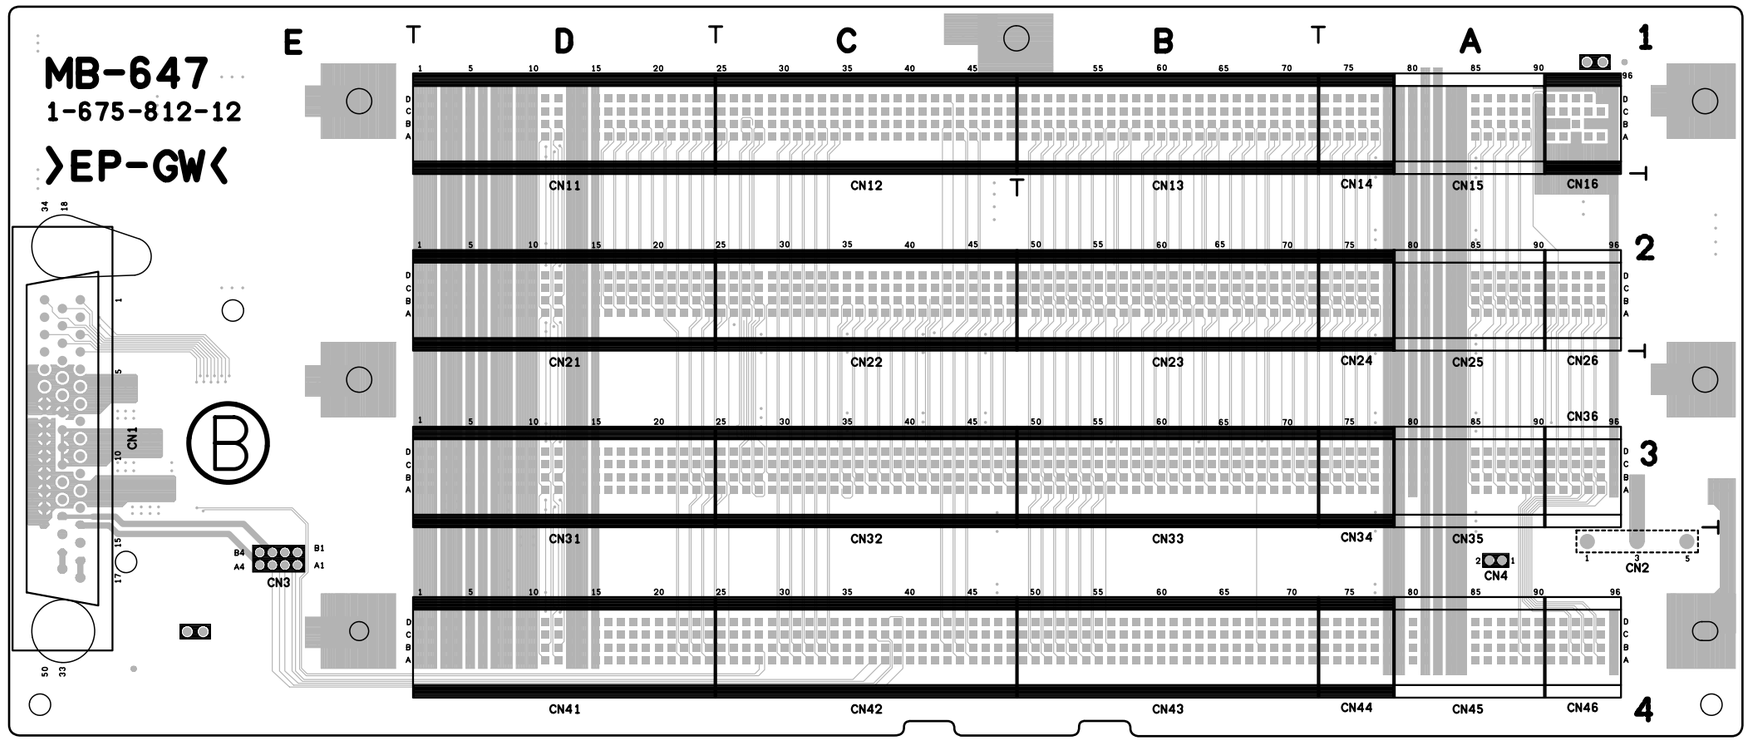

MB-647 -B SIDE-
SUFFIX: -12

```
----------------------
CN-1617 (1-676-625-11)
----------------------

C1       E2
C2       E2
C3       B2
C4       B2
C5       C2
C6       B2
C7       D3
C8       D3
C9       B2
C10      B2

CN1      C1
CN2      B1
CN3      A1
CN4      A1
CN5      D3
CN6      B2
CN7      A2
CN8      C3
CN9      D3
CN10     E3
CN11     B3
CN12     D3
CN13     B3
CN14     E2
CN15     E2
CN22     C3

FL2      C2
FL4      B2
FL16     E3
FL17     E3
FL18     E2
FL19     E3
FL20     E3
FL21     E2
FL22     E3
FL23     E3
FL24     E2
FL25     E3
FL26     E3
FL27     E2
FL28     C2
FL29     C2
FL30     C2
FL31     C2
FL32     C2
FL33     C2
FL34     C2
FL35     C2

LP1      E3
LP2      E2

R1       C2
R2       B2
R3       A2
R4       A2
R5       A2
R6       A2
R7       B2
R8       B2
R9       B2
R10      B2
R11      B2
```

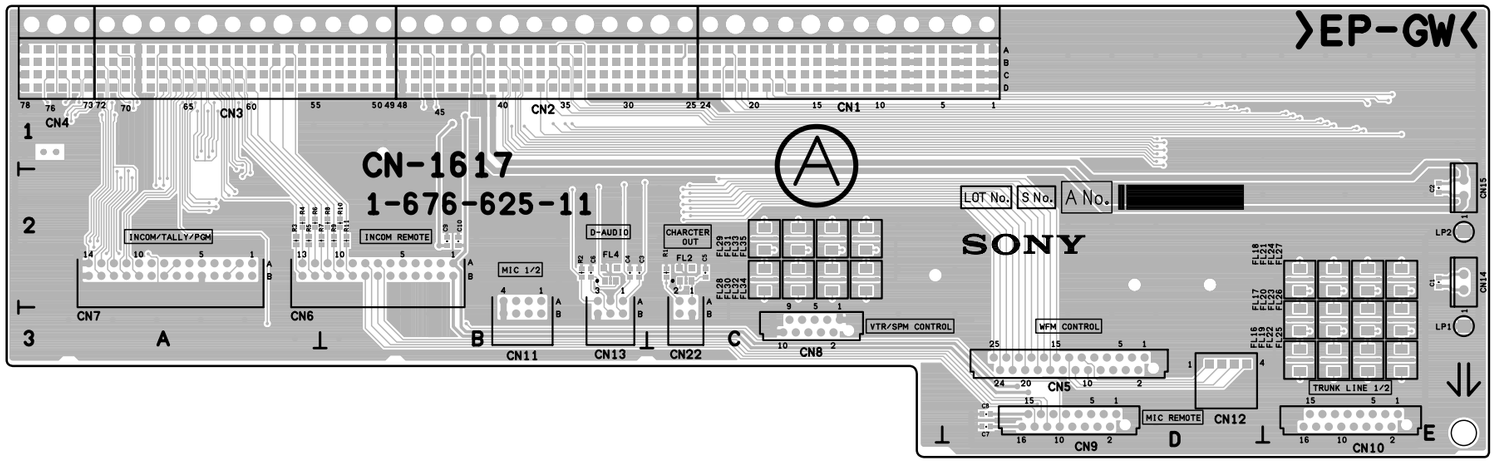

CN-1617 -A SIDE-
SUFFIX: -11

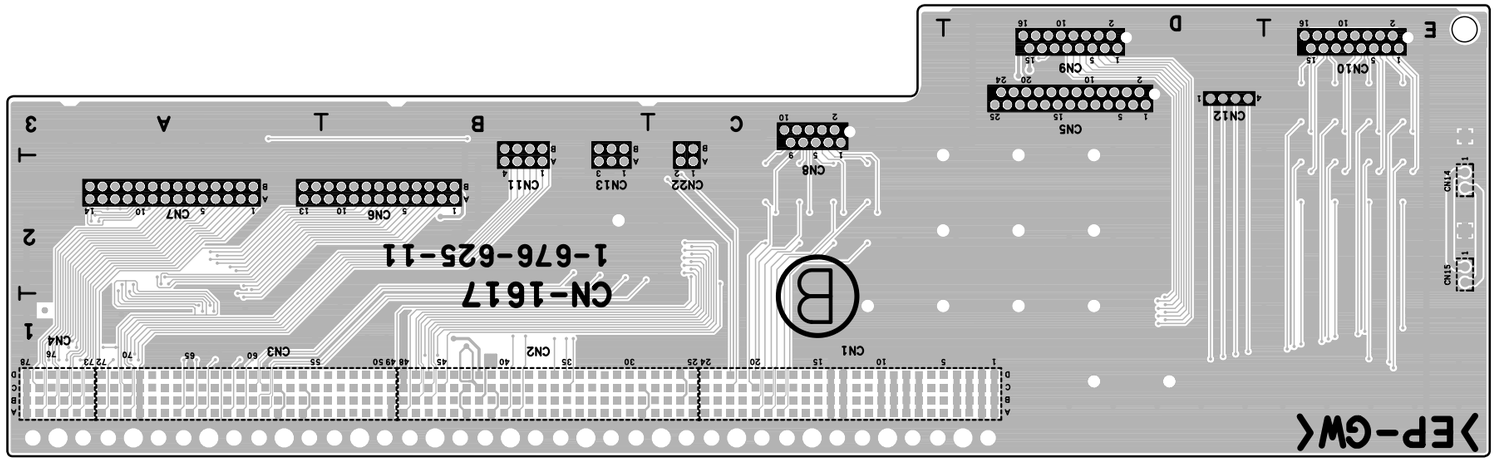

CCU-900 (UC) : S/N 10001 and Higher
CCU-900 (J) : S/N 30001 and Higher
CCU-900P (CE) : S/N 40001 and Higher

CN-1617 -B SIDE-
SUFFIX: -11

CCU-900 (UC) : S/N 10001 and Higher
CCU-900 (J) : S/N 30001 and Higher
CCU-900P (CE) : S/N 40001 and Higher



CN-1618 -A SIDE-
SUFFIX: -11



CN-1618 -B SIDE-
SUFFIX: -11

CCU-900 (UC) : S/N 10001 and Higher
CCU-900 (J) : S/N 30001 and Higher
CCU-900P (CE) : S/N 40001 and Higher



CN-1619 -A SIDE-
SUFFIX: -11



CN-1619 -B SIDE-
SUFFIX: -11

CCU-900 (UC) : S/N 10001 and Higher
CCU-900 (J) : S/N 30001 and Higher
CCU-900P (CE) : S/N 40001 and Higher



CN-1635 -A SIDE-
SUFFIX: -11



CN-1635 -B SIDE-
SUFFIX: -11

CCU-900 (UC) : S/N 10001 and Higher
CCU-900 (J) : S/N 30001 and Higher
CCU-900P (CE) : S/N 40001 and Higher



CN-1636 -A SIDE-
SUFFIX: -11



CN-1636 -B SIDE-
SUFFIX: -11

CN-1618, CN-1619, CN-1635, CN-1636, CN-1637, CN-1638, CN-1925

CCU-900 (UC) : S/N 10001 and Higher
CCU-900 (J) : S/N 30001 and Higher
CCU-900P (CE) : S/N 40001 and Higher



CN-1637 -A SIDE-
SUFFIX: -11

CN-1637 -B SIDE-
SUFFIX: -11

CCU-900 (UC) : S/N 10001 and Higher
CCU-900 (J) : S/N 30001 and Higher
CCU-900P (CE) : S/N 40001 and Higher



CN-1638 -A SIDE-
SUFFIX: -11



CN-1638 -B SIDE-
SUFFIX: -11

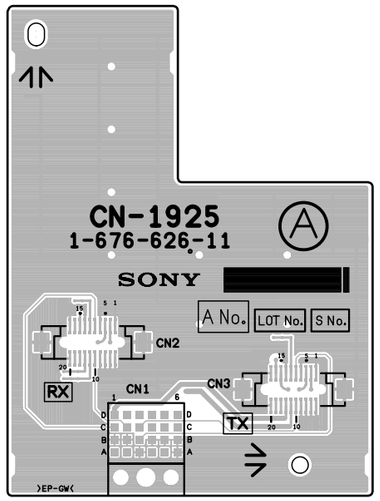

CCU-900 (UC) : S/N 10001 and Higher
CCU-900 (J) : S/N 30001 and Higher
CCU-900P (CE) : S/N 40001 and Higher

CN-1925 -A SIDE-
SUFFIX: -11

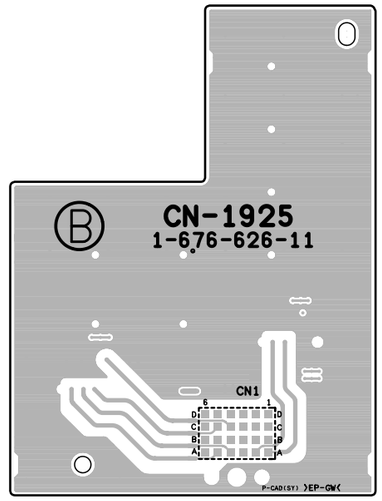

CN-1925 -B SIDE-
SUFFIX: -11

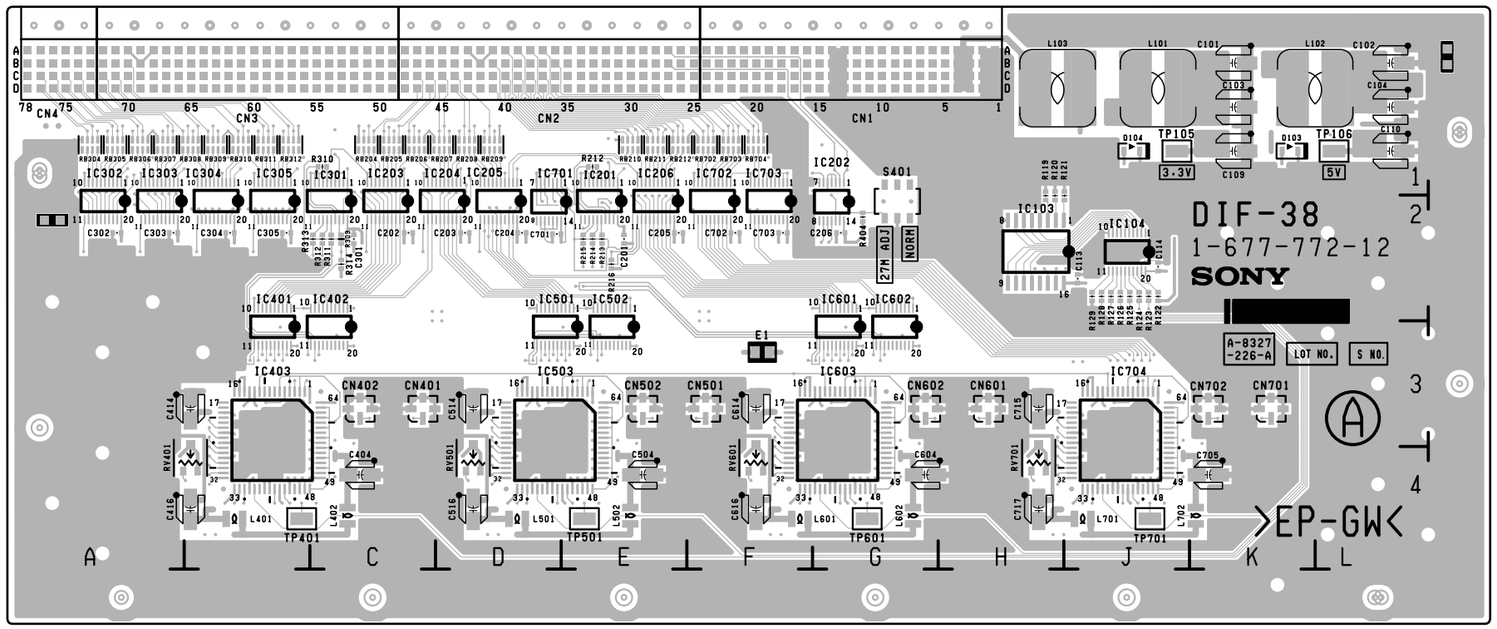

DIF-38 -A SIDE-
SUFFIX: -12

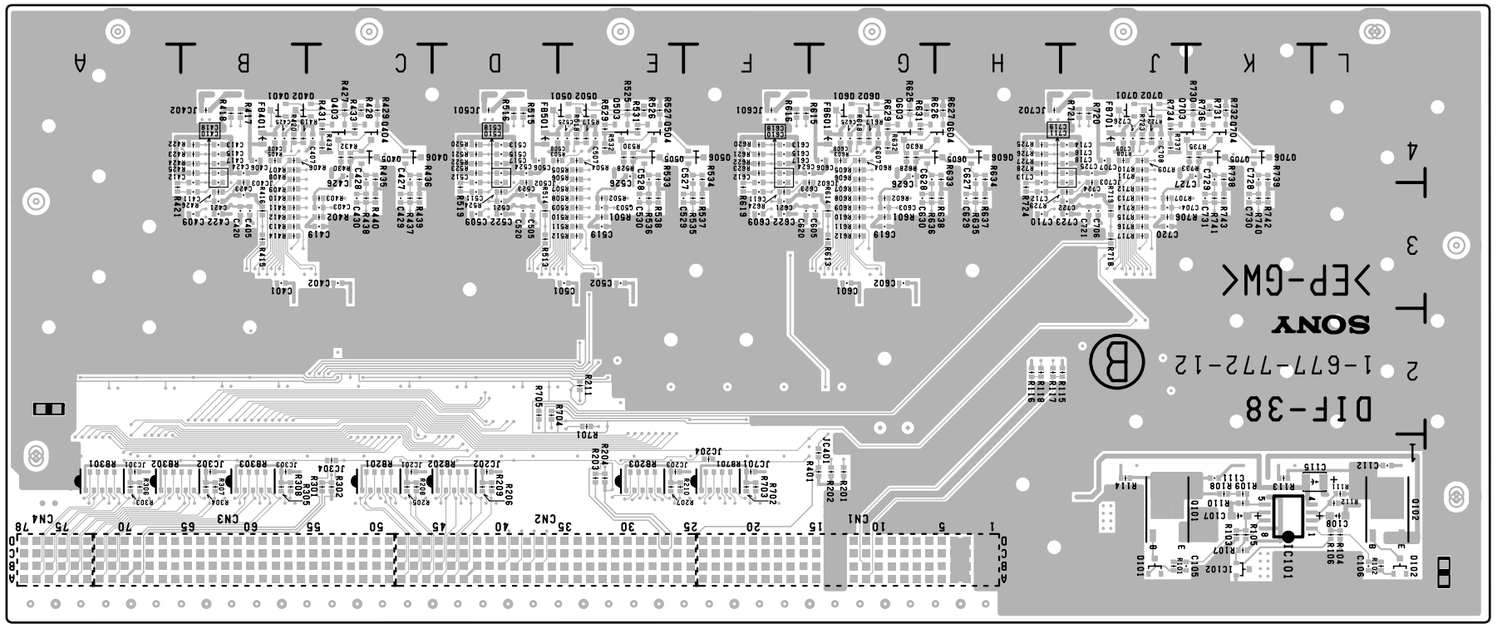

BKP-9330 (SY) : S/N 10058 and Higher

DIF-38 -B SIDE-
SUFFIX: -12

DIF-38 (1-677-772-12)
---

*:B SIDE

C101	K1	C605	*G3	IC204	D1	R111	*L1	R502	*E3	R716	*J3
C102	L1	C606	*G4	IC205	D1	R112	*L1	R503	*E4	R717	*J3
C103	K1	C607	*G4	IC206	E1	R113	*K1	R504	*E4	R718	*J3
C104	L1	C608	*G4	IC301	C1	R114	*J1	R505	*E4	R719	*J3
C105	*K1	C609	*F3	IC302	A1	R115	*J2	R506	*E4	R720	*J4
C106	*L1	C610	*F3	IC303	A1	R116	*H2	R507	*E3	R721	*J4
C107	*K1	C611	*F3	IC304	B1	R117	*H2	R508	*E3	R722	*J4
C108	*L1	C612	*F3	IC305	B1	R118	*H2	R509	*E3	R723	*J4
C109	K1	C613	*F4	IC401	B2	R119	H2	R510	*E3	R724	*H3
C110	L1	C614	F3	IC402	C2	R120	H2	R511	*E3	R725	*H4
C111	*K1	C615	*F4	IC403	B3	R121	J2	R512	*E3	R726	*H4
C112	*L1	C616	F4	IC501	E2	R122	J2	R513	*D3	R727	*H4
C113	J2	C617	*F4	IC502	E2	R123	J2	R514	*D3	R728	*H4
C114	J2	C618	*F4	IC503	D3	R124	J2	R515	*D4	R729	*J3
C115	*L1	C619	*G3	IC601	G2	R125	J2	R516	*D4	R730	*K4
C201	E2	C620	*F3	IC602	G2	R126	J2	R517	*E4	R731	*K4
C202	C2	C621	*F3	IC603	G3	R127	J2	R518	*E4	R732	*K4
C203	D2	C622	*F3	IC701	E1	R128	J2	R519	*D3	R733	*K4
C204	D2	C623	*G3	IC702	F1	R129	J2	R520	*D4	R734	*J4
C205	E2	C624	*G4	IC703	F1	R201	*G1	R521	*D4	R735	*K4
C206	G2	C625	*G4	IC704	J3	R202	*G1	R522	*D4	R736	*K4
C301	C2	C626	*G4			R203	*E1	R523	*D4	R737	*J4
C302	A2	C627	*H4	JC201	*C1	R204	*E1	R524	*D3	R738	*K4
C303	A2	C628	*G4	JC202	*D1	R205	*C1	R525	*E4	R739	*K4
C304	B2	C629	*H3	JC203	*E1	R206	*D1	R526	*E4	R740	*K3
C305	B2	C630	*G3	JC204	*F1	R207	*E1	R527	*E4	R741	*K3
C401	*B3	C701	D2	JC301	*A1	R208	*C1	R528	*E4	R742	*K3
C402	*C3	C702	F2	JC302	*B1	R209	*D1	R529	*E4	R743	*K3
C403	*C3	C703	F2	JC303	*B1	R210	*E1	R530	*E4		
C404	C4	C704	*J3	JC304	*C1	R211	*E2	R531	*E4	RB201	*C1
C405	*B3	C705	K4	JC401	*G1	R212	E1	R532	*E4	RB202	*D1
C406	*B4	C706	*J3	JC402	*B4	R213	E2	R533	*E4	RB203	*E1
C407	*C4	C707	*J4	JC403	*B3	R214	E2	R534	*F4	RB204	C1
C408	*B4	C708	*J4	JC501	*D4	R215	E2	R535	*F3	RB205	C1
C409	*B3	C709	*J4	JC502	*D3	R216	E2	R536	*E3	RB206	C1
C410	*B3	C710	*H3	JC601	*F4	R301	*C1	R537	*F3	RB207	D1
C411	*B3	C711	*J3	JC602	*G3	R302	*C1	R538	*E3	RB208	D1
C412	*B3	C712	*H3	JC701	*F1	R303	*A1	R601	*G3	RB209	D1
C413	*B4	C713	*H3	JC702	*H4	R304	*B1	R602	*G3	RB210	E1
C414	B3	C714	*J4	JC703	*J3	R305	*B1	R603	*G4	RB211	E1
C415	*B4	C715	H3			R306	*A1	R604	*G4	RB212	E1
C416	B4	C716	*J4	L101	J1	R307	*B1	R605	*G4	RB301	*A1
C417	*B4	C717	H4	L102	L1	R308	*B1	R606	*G4	RB302	*A1
C418	*B4	C718	*J4	L103	H1	R309	C2	R607	*G3	RB303	*B1
C419	*C3	C719	*J4	L401	B4	R310	C1	R608	*G3	RB304	A1
C420	*B3	C720	*J3	L402	C4	R311	C2	R609	*G3	RB305	A1
C421	*B3	C721	*J3	L501	D4	R312	C2	R610	*G3	RB306	A1
C422	*B3	C722	*J3	L502	E4	R313	C2	R611	*G3	RB307	A1
C423	*B3	C723	*J3	L601	F4	R314	C2	R612	*G3	RB308	B1
C424	*B4	C724	*J3	L602	G4	R401	*G1	R613	*G3	RB309	B1
C425	*B4	C725	*J4	L701	J4	R402	*C3	R614	*G3	RB310	B1
C426	*C4	C726	*J4	L702	K4	R403	*C3	R615	*F4	RB311	B1
C427	*C4	C727	*K4			R404	G2	R616	*F4	RB312	B1
C428	*C4	C728	*K4	Q101	*J1	R405	*B4	R617	*G4	RB701	*F1
C429	*C3	C729	*K4	Q102	*L1	R406	*B4	R618	*G4	RB702	F1
C430	*C3	C730	*K3	Q401	*B4	R407	*B4	R619	*F3	RB703	F1
C501	*E3	C731	*K3	Q402	*B4	R408	*B4	R620	*F4	RB704	F1
C502	*E3			Q403	*C4	R409	*B3	R621	*F4		
C503	*E3	CN1	G1	Q404	*C4	R410	*B3	R622	*F4	RV401	B4
C504	E4	CN2	D1	Q405	*C4	R411	*B3	R623	*F4	RV501	D4
C505	*D3	CN3	B1	Q406	*C4	R412	*B3	R624	*F3	RV601	F4
C506	*D4	CN4	A1	Q501	*E4	R413	*B3	R625	*G4	RV701	H4
C507	*E4	CN401	C3	Q502	*E4	R414	*B3	R626	*G4		
C508	*E4	CN402	C3	Q503	*E4	R415	*B3	R627	*H4	S401	G2
C509	*D3	CN501	F3	Q504	*E4	R416	*B3	R628	*G4		
C510	*D3	CN502	E3	Q505	*E4	R417	*B4	R629	*G4	TP105	J1
C511	*D3	CN601	H3	Q506	*F4	R418	*B4	R630	*G4	TP106	L1
C512	*D3	CN602	G3	Q601	*G4	R419	*B4	R631	*G4	TP401	B4
C513	*D4	CN701	K3	Q602	*G4	R420	*B4	R632	*G4	TP501	E4
C514	D3	CN702	K3	Q603	*G4	R421	*A3	R633	*H4	TP601	G4
C515	*D4			Q604	*H4	R422	*B4	R634	*H4	TP701	J4
C516	D4	D101	*J1	Q605	*H4	R423	*B4	R635	*H3		
C517	*D4	D102	*L1	Q606	*H4	R424	*B4	R636	*G3		
C518	*D4	D103	K1	Q701	*J4	R425	*B4	R637	*H3		
C519	*E3	D104	J1	Q702	*J4	R426	*B3	R638	*H3		
C520	*D3			Q703	*K4	R427	*C4	R701	*E2		
C521	*D3	E1	F3	Q704	*K4	R428	*C4	R702	*F1		
C522	*D3			Q705	*K4	R429	*C4	R703	*F1		
C523	*D3	FB401	*B4	Q706	*K4	R430	*C4	R704	*D2		
C524	*D4	FB501	*D4			R431	*C4	R705	*D2		
C525	*E4	FB601	*G4	R101	*J1	R432	*C4	R706	*J3		
C526	*E4	FB701	*J4	R102	*L1	R433	*C4	R707	*J3		
C527	*F4			R103	*K1	R434	*C4	R708	*J4		
C528	*E4	IC101	*L1	R104	*L1	R435	*C4	R709	*J4		
C529	*F3	IC102	*K1	R105	*K1	R436	*C4	R710	*J4		
C530	*E3	IC103	J2	R106	*L1	R437	*C3	R711	*J4		
C601	*G3	IC104	J2	R107	*K1	R438	*C3	R712	*J3		
C602	*G3	IC201	E1	R108	*K1	R439	*C3	R713	*J3		
C603	*G3	IC202	G1	R109	*K1	R440	*C3	R714	*J3		
C604	G4	IC203	C1	R110	*K1	R501	*E3	R715	*J3		

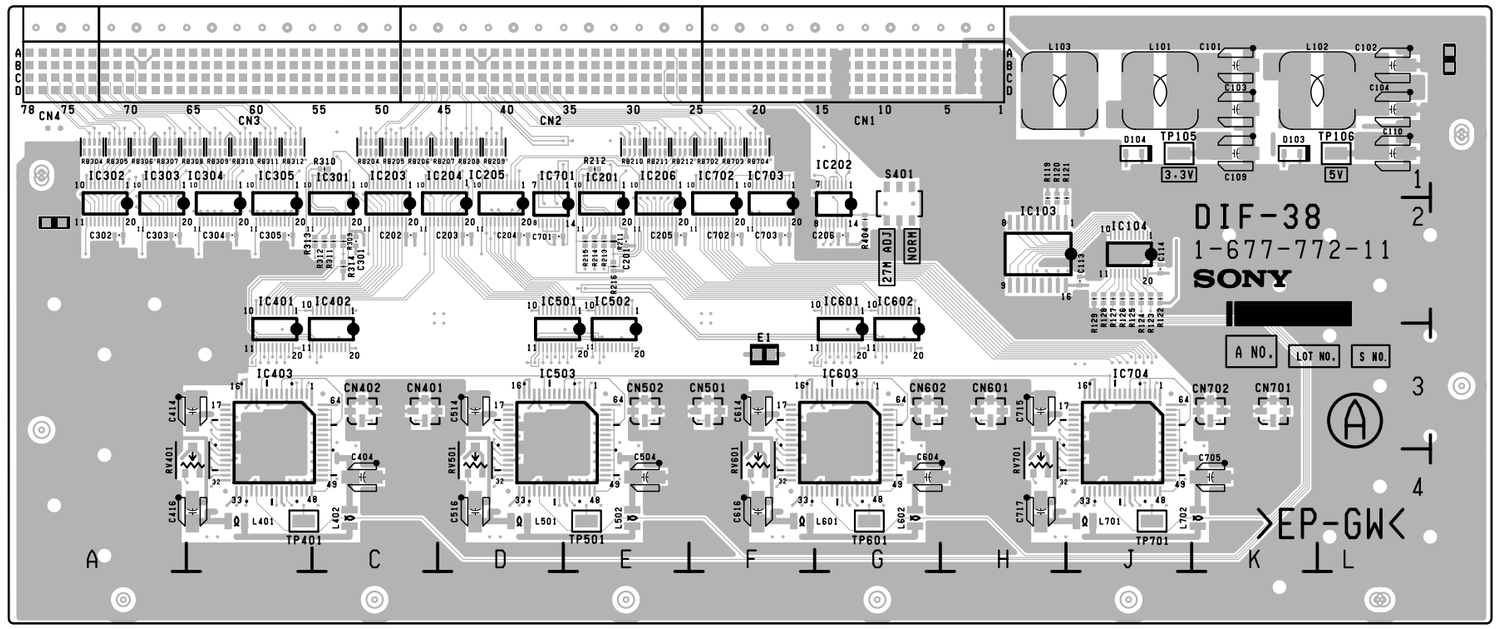

DIF-38 -A SIDE-
SUFFIX: -11

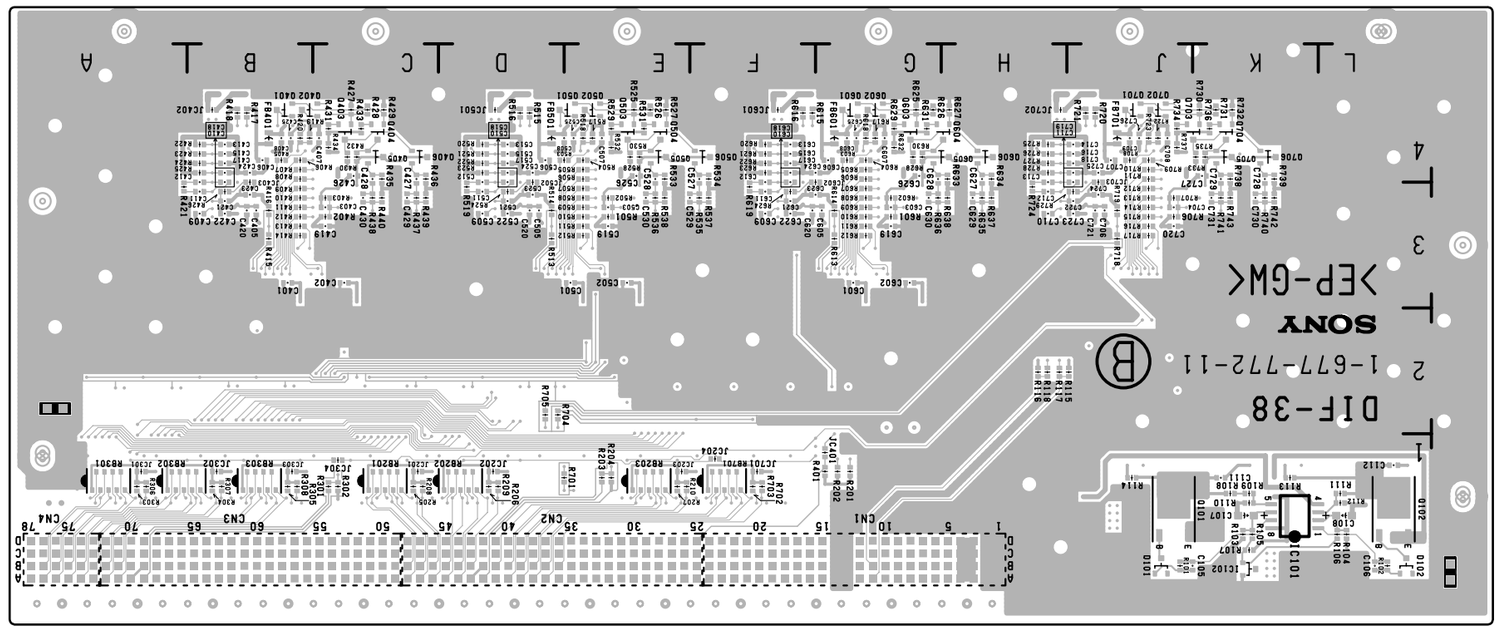

BKP-9330 (SY) : S/N 10001 through 10057

DIF-38 -B SIDE-
SUFFIX: -11

DIF-38 (1-677-772-11)
---

*:B SIDE

C101	K1	C606	*G4	IC205	D1	R112	*L1	R503	*E4	R717	*J3
C102	L1	C607	*G4	IC206	E1	R113	*K1	R504	*E4	R718	*J3
C103	K1	C608	*G4	IC301	C1	R114	*J1	R505	*E4	R719	*J3
C104	L1	C609	*F3	IC302	A1	R115	*J2	R506	*E4	R720	*J4
C105	*K1	C610	*F3	IC303	A1	R116	*H2	R507	*E3	R721	*J4
C106	*L1	C611	*F3	IC304	B1	R117	*H2	R508	*E3	R722	*J4
C107	*K1	C612	*F3	IC305	B1	R118	*H2	R509	*E3	R723	*J4
C108	*L1	C613	*F4	IC401	B2	R119	H2	R510	*E3	R724	*H3
C109	K1	C614	F3	IC402	C2	R120	H2	R511	*E3	R725	*H4
C110	L1	C615	*F4	IC403	B3	R121	J2	R512	*E3	R726	*H4
C111	*K1	C616	F4	IC501	E2	R122	J2	R513	*D3	R727	*H4
C112	*L1	C617	*F4	IC502	E2	R123	J2	R514	*D3	R728	*H4
C113	J2	C618	*F4	IC503	D3	R124	J2	R515	*D4	R729	*J3
C114	J2	C619	*G3	IC601	G2	R125	J2	R516	*D4	R730	*K4
C201	E2	C620	*F3	IC602	G2	R126	J2	R517	*E4	R731	*K4
C202	C2	C621	*F3	IC603	G3	R127	J2	R518	*E4	R732	*K4
C203	D2	C622	*F3	IC701	E1	R128	J2	R519	*D3	R733	*K4
C204	D2	C623	*G3	IC702	F1	R129	J2	R520	*D4	R734	*J4
C205	E2	C624	*G4	IC703	F1	R201	*G1	R521	*D4	R735	*K4
C206	G2	C625	*G4	IC704	J3	R202	*G1	R522	*D4	R736	*K4
C301	C2	C626	*G4			R203	*E1	R523	*D4	R737	*J4
C302	A2	C627	*H4	JC201	*C1	R204	*E1	R524	*D3	R738	*K4
C303	A2	C628	*G4	JC202	*D1	R205	*C1	R525	*E4	R739	*K4
C304	B2	C629	*H3	JC203	*E1	R206	*D1	R526	*E4	R740	*K3
C305	B2	C630	*G3	JC204	*F1	R207	*E1	R527	*E4	R741	*K3
C401	*B3	C701	D2	JC301	*A1	R208	*C1	R528	*E4	R742	*K3
C402	*C3	C702	F2	JC302	*B1	R209	*D1	R529	*E4	R743	*K3
C403	*C3	C703	F2	JC303	*B1	R210	*E1	R530	*E4		
C404	C4	C704	*J3	JC304	*C1	R211	E2	R531	*E4	RB201	*C1
C405	*B3	C705	K4	JC401	*G1	R212	E1	R532	*E4	RB202	*D1
C406	*B4	C706	*J3	JC402	*B4	R213	E2	R533	*E4	RB203	*E1
C407	*C4	C707	*J4	JC403	*B3	R214	E2	R534	*F4	RB204	C1
C408	*B4	C708	*J4	JC501	*D4	R215	E2	R535	*F3	RB205	C1
C409	*B3	C709	*J4	JC502	*D3	R216	E2	R536	*E3	RB206	C1
C410	*B3	C710	*H3	JC601	*F4	R301	*C1	R537	*F3	RB207	D1
C411	*B3	C711	*J3	JC602	*G3	R302	*C1	R538	*E3	RB208	D1
C412	*B3	C712	*H3	JC701	*F1	R303	*A1	R601	*G3	RB209	D1
C413	*B4	C713	*H3	JC702	*H4	R304	*B1	R602	*G3	RB210	E1
C414	B3	C714	*J4	JC703	*J3	R305	*B1	R603	*G4	RB211	E1
C415	*B4	C715	H3			R306	*A1	R604	*G4	RB212	E1
C416	B4	C716	*J4	L101	J1	R307	*B1	R605	*G4	RB301	*A1
C417	*B4	C717	H4	L102	L1	R308	*B1	R606	*G4	RB302	*A1
C418	*B4	C718	*J4	L103	H1	R309	C2	R607	*G3	RB303	*B1
C419	*C3	C719	*J4	L401	B4	R310	C1	R608	*G3	RB304	A1
C420	*B3	C720	*J3	L402	C4	R311	C2	R609	*G3	RB305	A1
C421	*B3	C721	*J3	L501	D4	R312	C2	R610	*G3	RB306	A1
C422	*B3	C722	*J3	L502	E4	R313	C2	R611	*G3	RB307	A1
C423	*B3	C723	*J3	L601	F4	R314	C2	R612	*G3	RB308	B1
C424	*B4	C724	*J3	L602	G4	R401	*G1	R613	*G3	RB309	B1
C425	*B4	C725	*J4	L701	J4	R402	*C3	R614	*G3	RB310	B1
C426	*C4	C726	*J4	L702	K4	R403	*C3	R615	*F4	RB311	B1
C427	*C4	C727	*K4			R404	G2	R616	*F4	RB312	B1
C428	*C4	C728	*K4	Q101	*J1	R405	*B4	R617	*G4	RB701	*F1
C429	*C3	C729	*K4	Q102	*L1	R406	*B4	R618	*G4	RB702	F1
C430	*C3	C730	*K3	Q401	*B4	R407	*B4	R619	*F3	RB703	F1
C501	*E3	C731	*K3	Q402	*B4	R408	*B4	R620	*F4	RB704	F1
C502	*E3			Q403	*C4	R409	*B3	R621	*F4		
C503	*E3	CN1	G1	Q404	*C4	R410	*B3	R622	*F4	RV401	B4
C504	E4	CN2	D1	Q405	*C4	R411	*B3	R623	*F4	RV501	D4
C505	*D3	CN3	B1	Q406	*C4	R412	*B3	R624	*F3	RV601	F4
C506	*D4	CN4	A1	Q501	*E4	R413	*B3	R625	*G4	RV701	H4
C507	*E4	CN401	C3	Q502	*E4	R414	*B3	R626	*G4		
C508	*E4	CN402	C3	Q503	*E4	R415	*B3	R627	*H4	S401	G2
C509	*D3	CN501	F3	Q504	*E4	R416	*B3	R628	*G4		
C510	*D3	CN502	E3	Q505	*E4	R417	*B4	R629	*G4	TP105	J1
C511	*D3	CN601	H3	Q506	*F4	R418	*B4	R630	*G4	TP106	L1
C512	*D3	CN602	G3	Q601	*G4	R419	*B4	R631	*G4	TP401	B4
C513	*D4	CN701	K3	Q602	*G4	R420	*B4	R632	*G4	TP501	E4
C514	D3	CN702	K3	Q603	*G4	R421	*A3	R633	*H4	TP601	G4
C515	*D4			Q604	*H4	R422	*B4	R634	*H4	TP701	J4
C516	D4	D101	*J1	Q605	*H4	R423	*B4	R635	*H3		
C517	*D4	D102	*L1	Q606	*H4	R424	*B4	R636	*G3		
C518	*D4	D103	K1	Q701	*J4	R425	*B4	R637	*H3		
C519	*E3	D104	J1	Q702	*J4	R426	*B3	R638	*H3		
C520	*D3			Q703	*K4	R427	*C4	R701	*E1		
C521	*D3	E1	F3	Q704	*K4	R428	*C4	R702	*F1		
C522	*D3			Q705	*K4	R429	*C4	R703	*F1		
C523	*D3	FB401	*B4	Q706	*K4	R430	*C4	R704	*D2		
C524	*D4	FB501	*D4			R431	*C4	R705	*D2		
C525	*E4	FB601	*G4	R101	*J1	R432	*C4	R706	*J3		
C526	*E4	FB701	*J4	R102	*L1	R433	*C4	R707	*J3		
C527	*F4			R103	*K1	R434	*C4	R708	*J4		
C528	*E4	IC101	*L1	R104	*L1	R435	*C4	R709	*J4		
C529	*F3	IC102	*K1	R105	*K1	R436	*C4	R710	*J4		
C530	*E3	IC103	J2	R106	*L1	R437	*C3	R711	*J4		
C601	*G3	IC104	J2	R107	*K1	R438	*C3	R712	*J3		
C602	*G3	IC201	E1	R108	*K1	R439	*C3	R713	*J3		
C603	*G3	IC202	G1	R109	*K1	R440	*C3	R714	*J3		
C604	G4	IC203	C1	R110	*K1	R501	*E3	R715	*J3		
C605	*G3	IC204	D1	R111	*L1	R502	*E3	R716	*J3		

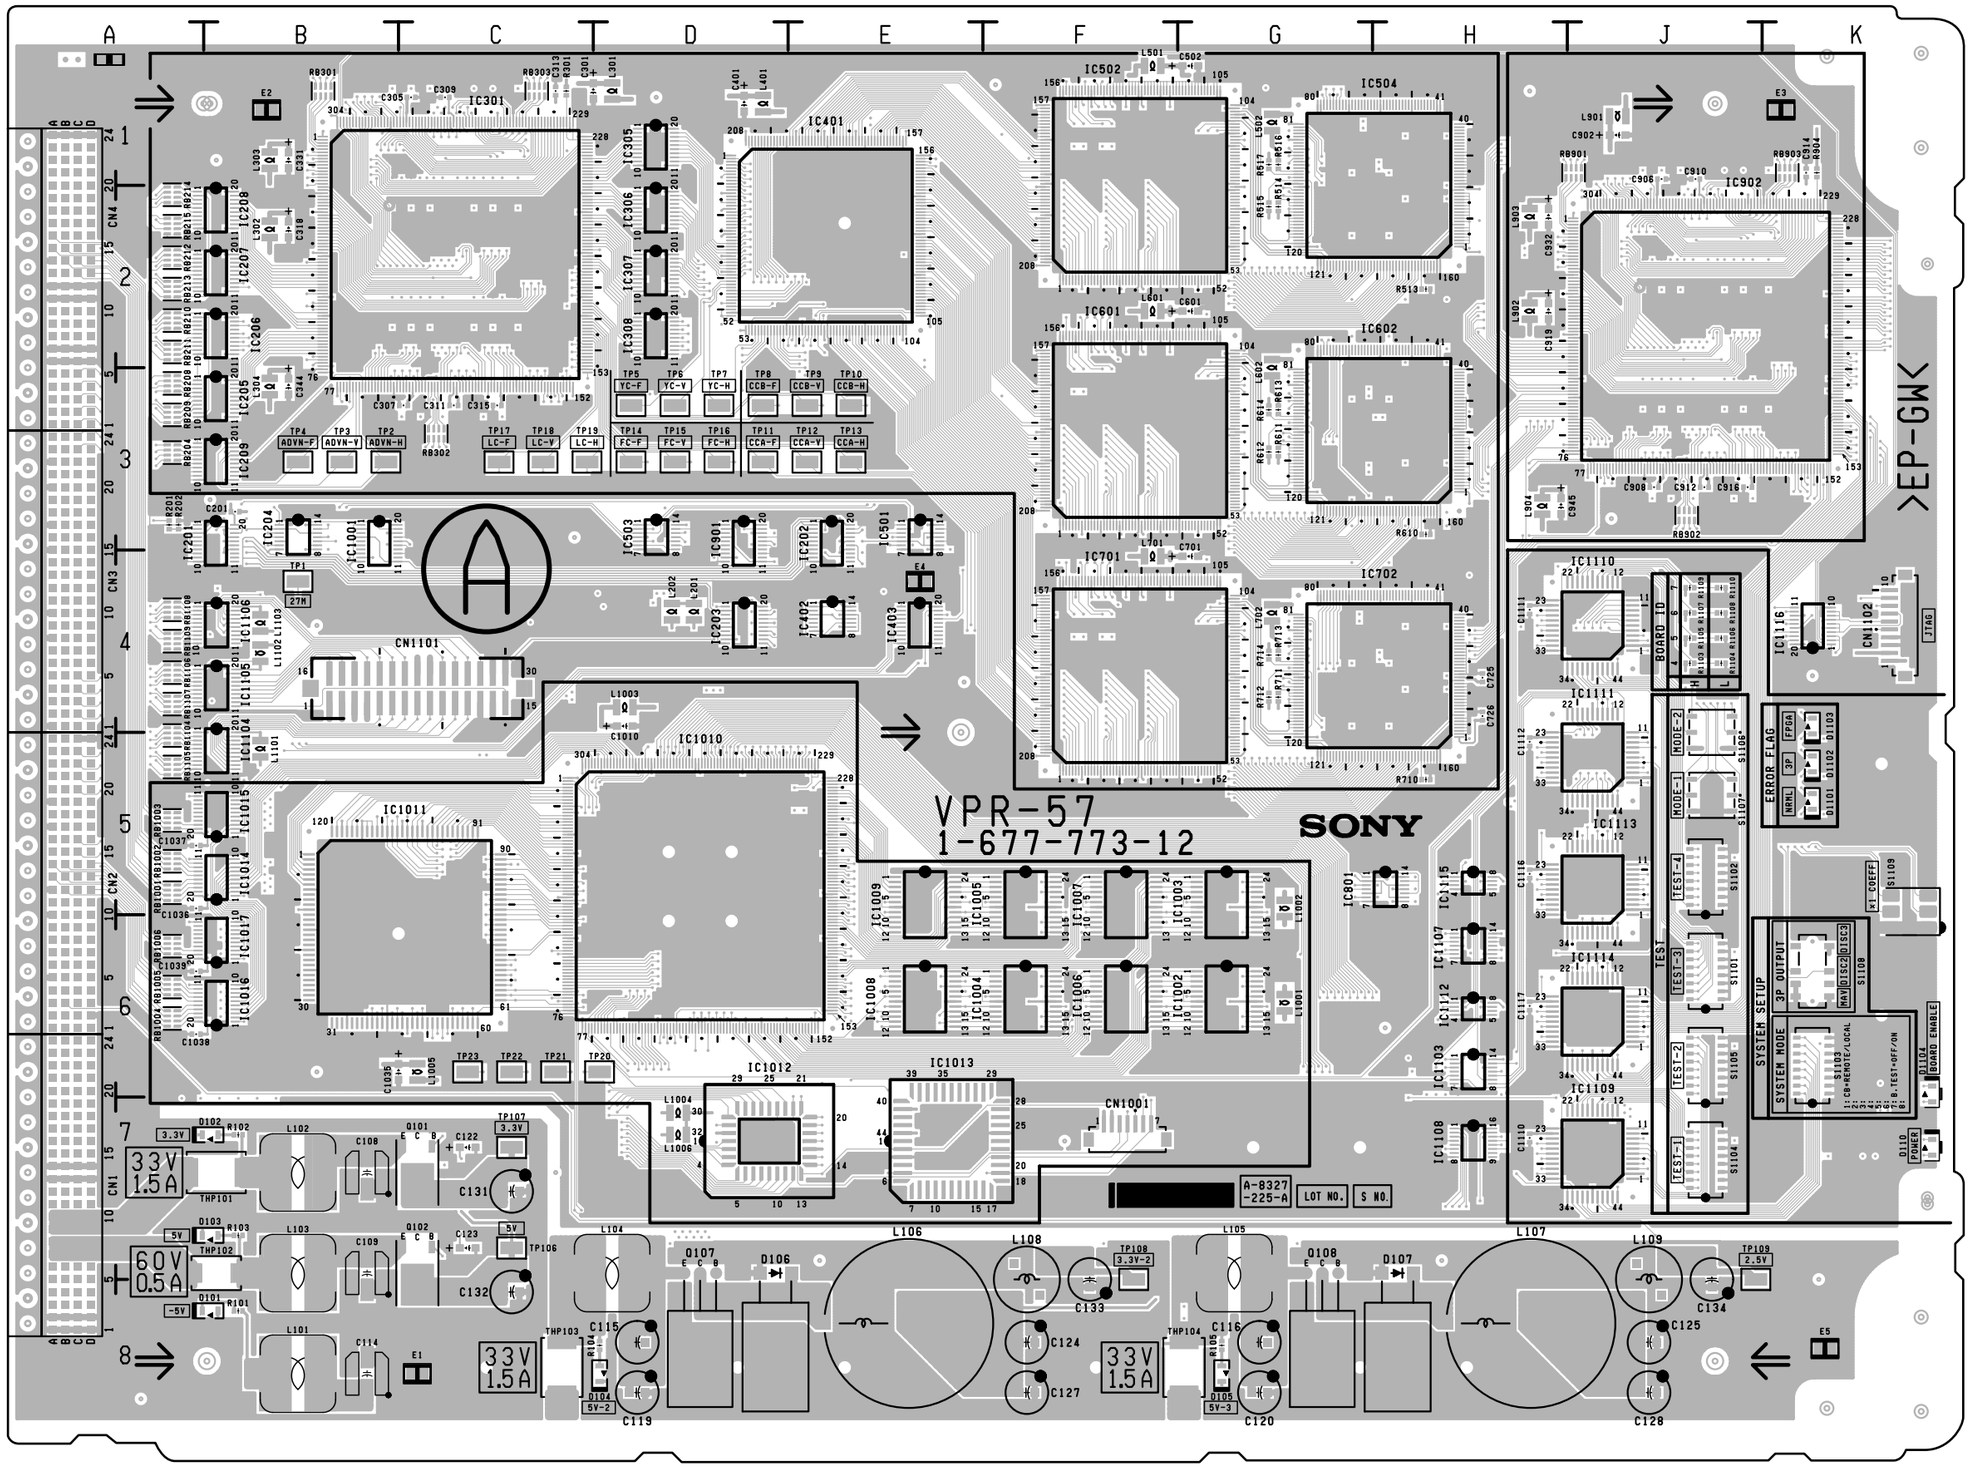

BKP-9330 (SY) : S/N 10058 and Higher

VPR-57 -A SIDE-
SUFFIX: -12

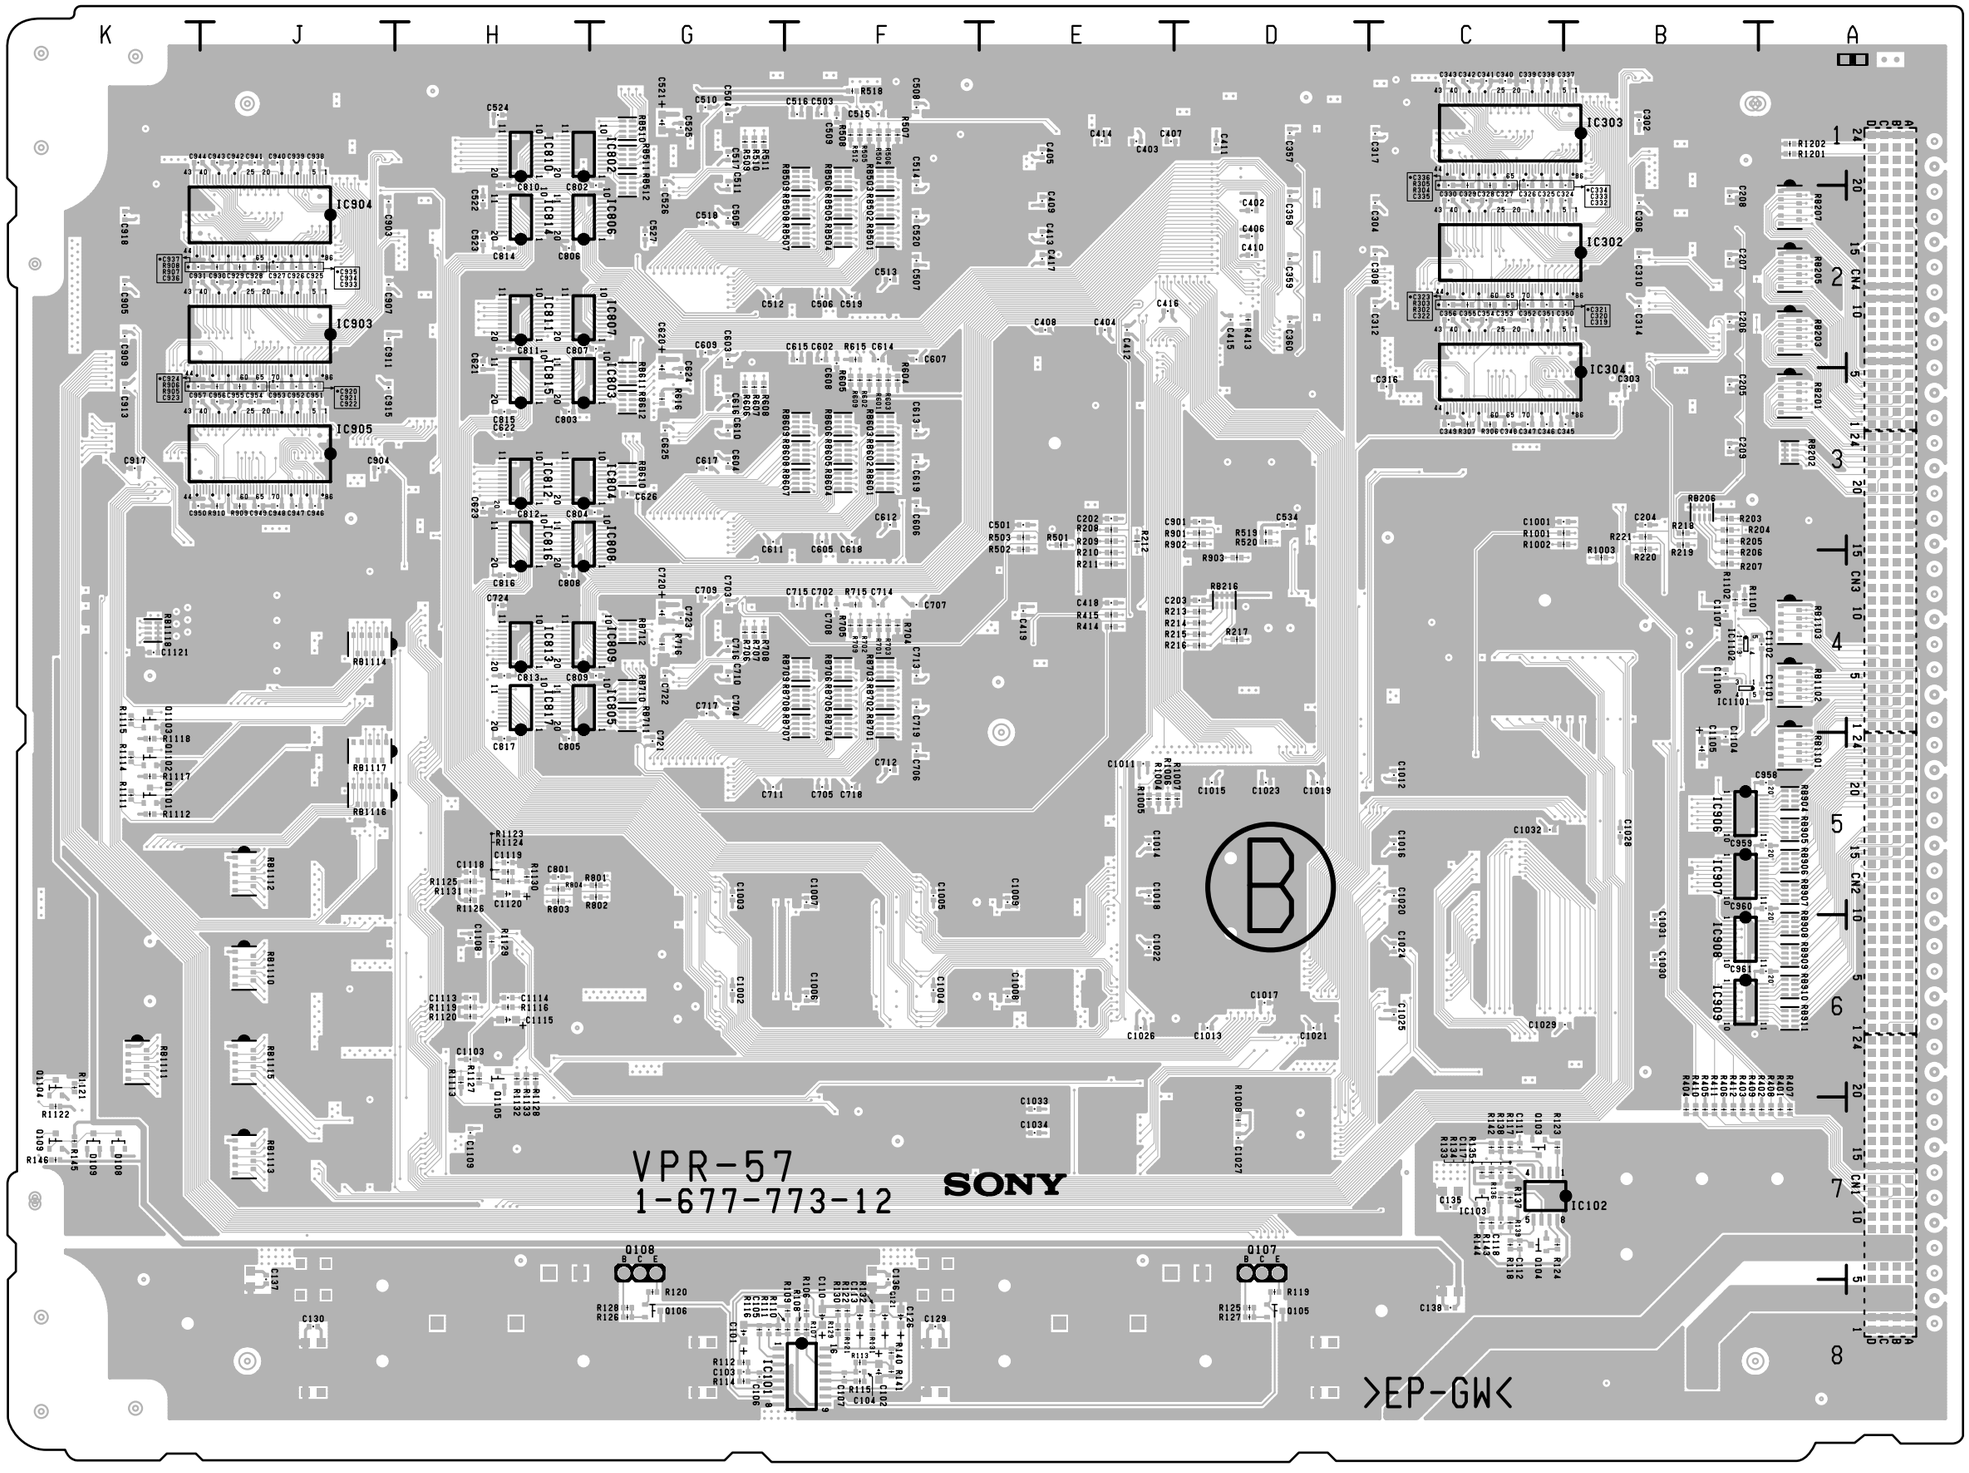

Components location list ; next page

VPR-57 -B SIDE-
SUFFIX: -12

VPR-57 (1-677-773-12)
---

*:B SIDE

C101	*G8	C344	B3	C701	G4	C948	*J3	D108	*K7	IC1103	H6	R125	*D8	R606	*G3	RB206	*B3	S1105	J6
C102	*F8	C345	*B3	C702	*F4	C949	*J3	D109	*K7	IC1104	A4	R126	*G8	R607	*G3	RB207	*A2	S1106	J4
C103	*G8	C346	*C3	C703	*G4	C950	*K3	D110	K7	IC1105	A4	R127	*D8	R608	*G3	RB208	A3	S1107	J5
C104	*F8	C347	*C3	C704	*G4	C951	*J3	D1101	K5	IC1106	A4	R128	*G8	R609	*F3	RB209	A3	S1108	K6
C105	*G8	C348	*C3	C705	*F5	C952	*J3	D1102	K5	IC1107	H6	R129	*F8	R610	H3	RB210	A2	S1109	K5
C106	*G8	C349	*C3	C706	*F5	C953	*J3	D1103	K4	IC1108	H7	R130	*F8	R611	G3	RB211	A2		
C107	*F8	C350	*B2	C707	*F4	C954	*J3	D1104	K6	IC1109	J7	R131	*F8	R612	G3	RB212	A2	THP101	B7
C108	B7	C351	*C2	C708	*F4	C955	*J3			IC1110	J4	R132	*F8	R613	G3	RB213	A2	THP102	B7
C109	B7	C352	*C2	C709	*G4	C956	*J3	E1	C8	IC1111	J5	R133	*C7	R614	G3	RB214	A2	THP103	C8
C110	*F8	C353	*C2	C710	*G4	C957	*K3	E2	B1	IC1112	H6	R134	*C7	R615	*F2	RB215	A2	THP104	G8
C111	*C7	C354	*C2	C711	*G5	C958	*A5	E3	K1	IC1113	J5	R135	*C7	R616	*G3	RB216	*D4		
C112	*C7	C355	*C2	C712	*F5	C959	*A5	E4	E4	IC1114	J6	R136	*C7	R701	*F4	RB301	B1	TP1	B4
C113	*F8	C356	*C2	C713	*F4	C960	*A5	E5	K8	IC1115	H5	R137	*C7	R702	*F4	RB302	C3	TP2	B3
C114	B8	C357	*D1	C714	*F4	C961	*A6			IC1116	K4	R138	*C7	R703	*F4	RB303	C1	TP3	B3
C115	D8	C358	*D2	C715	*F4	C1001	*C3	IC101	*G8			R139	*C7	R704	*F4	RB501	*F2	TP4	B3
C116	G8	C359	*D2	C716	*G4	C1002	*G6	IC102	*C7	L101	B8	R140	*F8	R705	*F4	RB502	*F2	TP5	D3
C117	*C7	C360	*D2	C717	*G4	C1003	*G5	IC103	*C7	L102	B7	R141	*F8	R706	*G4	RB503	*F1	TP6	D3
C118	*C7	C401	D1	C718	*F5	C1004	*F6	IC201	A3	L103	B7	R142	*C7	R707	*G4	RB504	*F2	TP7	D3
C119	D8	C402	*D2	C719	*F4	C1005	*F5	IC202	E3	L104	D7	R143	*C7	R708	*G4	RB505	*F2	TP8	D3
C120	G8	C403	*E1	C720	*G4	C1006	*F6	IC203	D4	L105	G7	R144	*C7	R709	*F4	RB506	*F1	TP9	E3
C121	*F8	C404	*E2	C721	*G5	C1007	*F5	IC204	B3	L106	E8	R145	*K7	R710	H5	RB507	*F2	TP10	E3
C122	C7	C405	*E1	C722	*G4	C1008	*E6	IC205	A3	L107	H8	R146	*K7	R711	G4	RB508	*F2	TP11	D3
C123	C7	C406	*D2	C723	*G4	C1009	*E5	IC206	A2	L108	F7	R201	A3	R712	G4	RB509	*F1	TP12	E3
C124	F8	C407	*E1	C724	*H4	C1010	D4	IC207	A2	L109	J7	R202	A3	R713	G4	RB510	*G1	TP13	E3
C125	J8	C408	*E2	C725	H4	C1011	*E5	IC208	A2	L201	D4	R203	*B3	R714	G4	RB511	*G1	TP14	D3
C126	*F8	C409	*E2	C726	H4	C1012	*C5	IC209	A3	L202	D4	R204	*B3	R715	*F4	RB512	*G1	TP15	D3
C127	F8	C410	*D2	C801	*H5	C1013	*D6	IC301	C2	L301	D1	R205	*B3	R716	*G4	RB601	*F3	TP16	D3
C128	J8	C411	*D1	C802	*G1	C1014	*E5	IC302	*B2	L302	B2	R206	*B4	R801	*G5	RB602	*F3	TP17	C3
C129	*F8	C412	*E2	C803	*H3	C1015	*D5	IC303	*B1	L303	B1	R207	*B4	R802	*G5	RB603	*F3	TP18	C3
C130	*J8	C413	*E2	C804	*G3	C1016	*C5	IC304	*B2	L304	B3	R208	*E3	R803	*H5	RB604	*F3	TP19	C3
C131	C7	C414	*E1	C805	*H5	C1017	*D6	IC305	D1	L401	D1	R209	*E3	R804	*H5	RB605	*F3	TP20	D6
C132	C8	C415	*D2	C806	*H2	C1018	*E5	IC306	D2	L501	F1	R210	*E4	R901	*D3	RB606	*F3	TP21	C6
C133	F7	C416	*E2	C807	*G2	C1019	*D5	IC307	D2	L502	G1	R211	*E4	R902	*D3	RB607	*F3	TP22	C6
C134	J7	C417	*E2	C808	*H4	C1020	*C5	IC308	D2	L601	F2	R212	*E3	R903	*D4	RB608	*F3	TP23	C6
C135	*C7	C418	*E4	C809	*G4	C1021	*D6	IC401	E2	L602	G2	R213	*D4	R904	K1	RB609	*F3	TP106	C7
C136	*F7	C419	*E4	C810	*H1	C1022	*E6	IC402	E4	L701	F4	R214	*D4	R905	*J3	RB610	*G3	TP107	C7
C137	*J7	C501	*E3	C811	*H2	C1023	*D5	IC403	E4	L702	G4	R215	*D4	R906	*J3	RB611	*G3	TP108	F7
C138	*C8	C502	G1	C812	*H3	C1024	*C6	IC501	E3	L901	J1	R216	*D4	R907	*J2	RB612	*G3	TP109	J7
C201	B3	C503	*F1	C813	*H4	C1025	*C6	IC502	F1	L902	H2	R217	*D4	R908	*J2	RB701	*F4		
C202	*E3	C504	*G1	C814	*H2	C1026	*E6	IC503	D3	L903	H2	R218	*B3	R909	*J3	RB702	*F4		
C203	*D4	C505	*G2	C815	*H3	C1027	*D7	IC504	H1	L904	H3	R219	*B3	R910	*J3	RB703	*F4		
C204	*B3	C506	*F2	C816	*H4	C1028	*B5	IC601	F3	L1001	G6	R220	*B3	R1001	*C3	RB704	*F4		
C205	*B3	C507	*F2	C817	*H5	C1029	*B6	IC602	H3	L1002	G5	R221	*B3	R1002	*C3	RB705	*F4		
C206	*B2	C508	*F1	C901	*D3	C1030	*B6	IC701	F4	L1003	D4	R301	C1	R1003	*B4	RB706	*F4		
C207	*B2	C509	*F1	C902	J1	C1031	*B6	IC702	H4	L1004	D7	R302	*C2	R1004	*E5	RB707	*F4		
C208	*B2	C510	*G1	C903	*J2	C1032	*C5	IC801	G5	L1005	C6	R303	*C2	R1005	*E5	RB708	*F4		
C209	*B3	C511	*G1	C904	*J3	C1033	*E7	IC802	*G1	L1006	D7	R304	*C1	R1006	*E5	RB709	*F4		
C301	D1	C512	*G2	C905	*K2	C1034	*E7	IC803	*G3	L1101	B5	R305	*C1	R1007	*D5	RB710	*G4		
C302	*B1	C513	*F2	C906	J1	C1035	C6	IC804	*G3	L1102	B4	R306	*C3	R1008	*D7	RB711	*G4		
C303	*B3	C514	*F1	C907	*J2	C1036	A5	IC805	*G4	L1103	B4	R307	*C3	R1101	*B4	RB712	*G4		
C304	*C2	C515	*F1	C908	J3	C1037	A5	IC806	*G2			R401	*A7	R1102	*B4	RB901	J1		
C305	C1	C516	*F1	C909	*K2	C1038	A6	IC807	*G2	Q101	C7	R402	*A7	R1103	J4	RB902	J3		
C306	*B2	C517	*G1	C910	J1	C1039	A6	IC808	*G4	Q102	C7	R403	*B7	R1104	J4	RB903	K1		
C307	C3	C518	*G2	C911	*J2	C1101	*A4	IC809	*G4	Q103	*C7	R404	*B7	R1105	J4	RB904	*A5		
C308	*C2	C519	*F2	C912	J3	C1102	*A4	IC810	*H1	Q104	*C7	R405	*B7	R1106	J4	RB905	*A5		
C309	C1	C520	*F2	C913	*K3	C1103	*H6	IC811	*H2	Q105	*D8	R406	*B7	R1107	J4	RB906	*A5		
C310	*B2	C521	*G1	C914	K1	C1104	*B5	IC812	*H3	Q106	*G8	R407	*A7	R1108	J4	RB907	*A5		
C311	C3	C522	*H2	C915	*J3	C1105	*B5	IC813	*H4	Q107	D7	R408	*A7	R1109	J4	RB908	*A6		
C312	*C2	C523	*H2	C916	J3	C1106	*B4	IC814	*H2	Q108	G7	R409	*B7	R1110	J4	RB909	*A6		
C313	C1	C524	*H1	C917	*K3	C1107	*B4	IC815	*H3	Q109	*K7	R410	*B7	R1111	*K5	RB910	*A6		
C314	*B2	C525	*G1	C918	*K2	C1108	*H6	IC816	*H4	Q1101	*K5	R411	*B7	R1112	*K5	RB911	*A6		
C315	C3	C526	*G1	C919	H2	C1109	*H7	IC817	*H4	Q1102	*K5	R412	*B7	R1113	*H6	RB1001	A5		
C316	*C3	C527	*G2	C920	*J3	C1110	H7	IC901	D3	Q1103	*K4	R413	*D2	R1114	*K5	RB1002	A5		
C317	*C1	C534	*D3	C921	*J3	C1111	H4	IC902	J2	Q1104	*K6	R414	*E4	R1115	*K4	RB1003	A5		
C318	B2	C601	G2	C922	*J3	C1112	H5	IC903	*J2	Q1105	*H6	R415	*E4	R1116	*H6	RB1004	A6		
C319	*B2	C602	*F2	C923	*J3	C1113	*H6	IC904	*J1			R501	*E3	R1117	*K5	RB1005	A6		
C320	*C2	C603	*G2	C924	*K3	C1114	*H6	IC905	*J3	R101	B8	R502	*E3	R1118	*K5	RB1006	A6		
C321	*C2	C604	*G3	C925	*J2	C1115	*H6	IC906	*B5	R102	B7	R503	*E3	R1119	*H6	RB1101	*A5		
C322	*C2	C605	*F3	C926	*J2	C1116	H5	IC907	*B5	R103	B7	R504	*F1	R1120	*H6	RB1102	*A4		
C323	*C2	C606	*F3	C927	*J2	C1117	H6	IC908	*B6	R104	D8	R505	*F1	R1121	*K6	RB1103	*A4		
C324	*B2	C607	*F2	C928	*J2	C1118	*H5	IC909	*B6	R105	G8	R506	*F1	R1122	*K7	RB1104	A5		
C325	*C2	C608	*F2	C929	*J2	C1119	*H5	IC1001	B3	R106	*F8	R507	*F1	R1123	*H5	RB1105	A5		
C326	*C2	C609	*G2	C930	*J2	C1120	*H5	IC1002	G6	R107	*F8	R508	*F1	R1124	*H5	RB1106	A4		
C327	*C2	C610	*G3	C931	*K2	C1121	*K4	IC1003	G5	R108	*F8	R509	*G1	R1125	*H5	RB1107	A4		
C328	*C2	C611	*G3	C932	H2			IC1004	F6	R109	*F8	R510	*G1	R1126	*H5	RB1108	A4		
C329	*C2	C612	*F3	C933	*J2	CN1	A7	IC1005	F5	R110	*F8	R511	*G1	R1127	*H6	RB1109	A4		
C330	*C2	C613	*F3	C934	*J2	CN2	A5	IC1006	F6	R111	*G8	R512	*F1	R1128	*H6	RB1110	*J6		
C331	B1	C614	*F2	C935	*J2	CN3	A4	IC1007	F5	R112	*G8	R513	H2	R1129	*H6	RB1111	*K6		
C332	*B1	C615	*F2	C936	*J2	CN4	A2	IC1008	E6	R113	*F8	R514	G2	R1130	*H5	RB1112	*J5		
C333	*C1	C616	*G3	C937	*K2	CN1001	F7	IC1009	E5	R114	*G8	R515	G2	R1131	*H5	RB1113	*J7		
C334	*C1	C617	*G3	C938	*J1	CN1101	C4	IC1010	D5	R115	*F8	R516	G1	R1132	*H6	RB1114	*J4		
C335	*C1	C618	*F3	C939	*J1	CN1102	K4	IC1011	C6	R116	*G8	R517	G1	R1133	*H6	RB1115	*J6		
C336	*C1	C619	*F3	C940	*J1			IC1012	D7	R117	*C7	R518	*F1	R1201	*A1	RB1116	*J5		
C337	*B1	C620	*G2	C941	*J1	D101	B8	IC1013	E7	R118	*C7	R519	*D3	R1202	*A1	RB1117	*J5		
C338	*C1	C621	*H2	C942	*J1	D102	B7	IC1014	B5	R119	*D8	R520	*D3			RB1118	*K4		
C339	*C1	C622	*H3	C943	*J1	D103	B7	IC1015	B5	R120	*G8	R601	*F3	RB201	*A3				
C340	*C1	C623	*H3	C944	*K1	D104	D8	IC1016	B6	R121	*F8	R602	*F3	RB202	*A3	S1101	J6		
C341	*C1	C624	*G3	C945	H3	D105	G8	IC1017	B6	R122	*F8	R603	*F3	RB203	*A2	S1102	J5		
C342	*C1	C625	*G3	C946	*J3	D106	D7	IC1101	*B4	R123	*C7	R604	*F3	RB204	A3	S1103	K6		
C343	*C1	C626	*G3	C947	*J3	D107	H7	IC1102	*B4	R124	*C7	R605	*F3	RB205	*A2	S1104	J7		

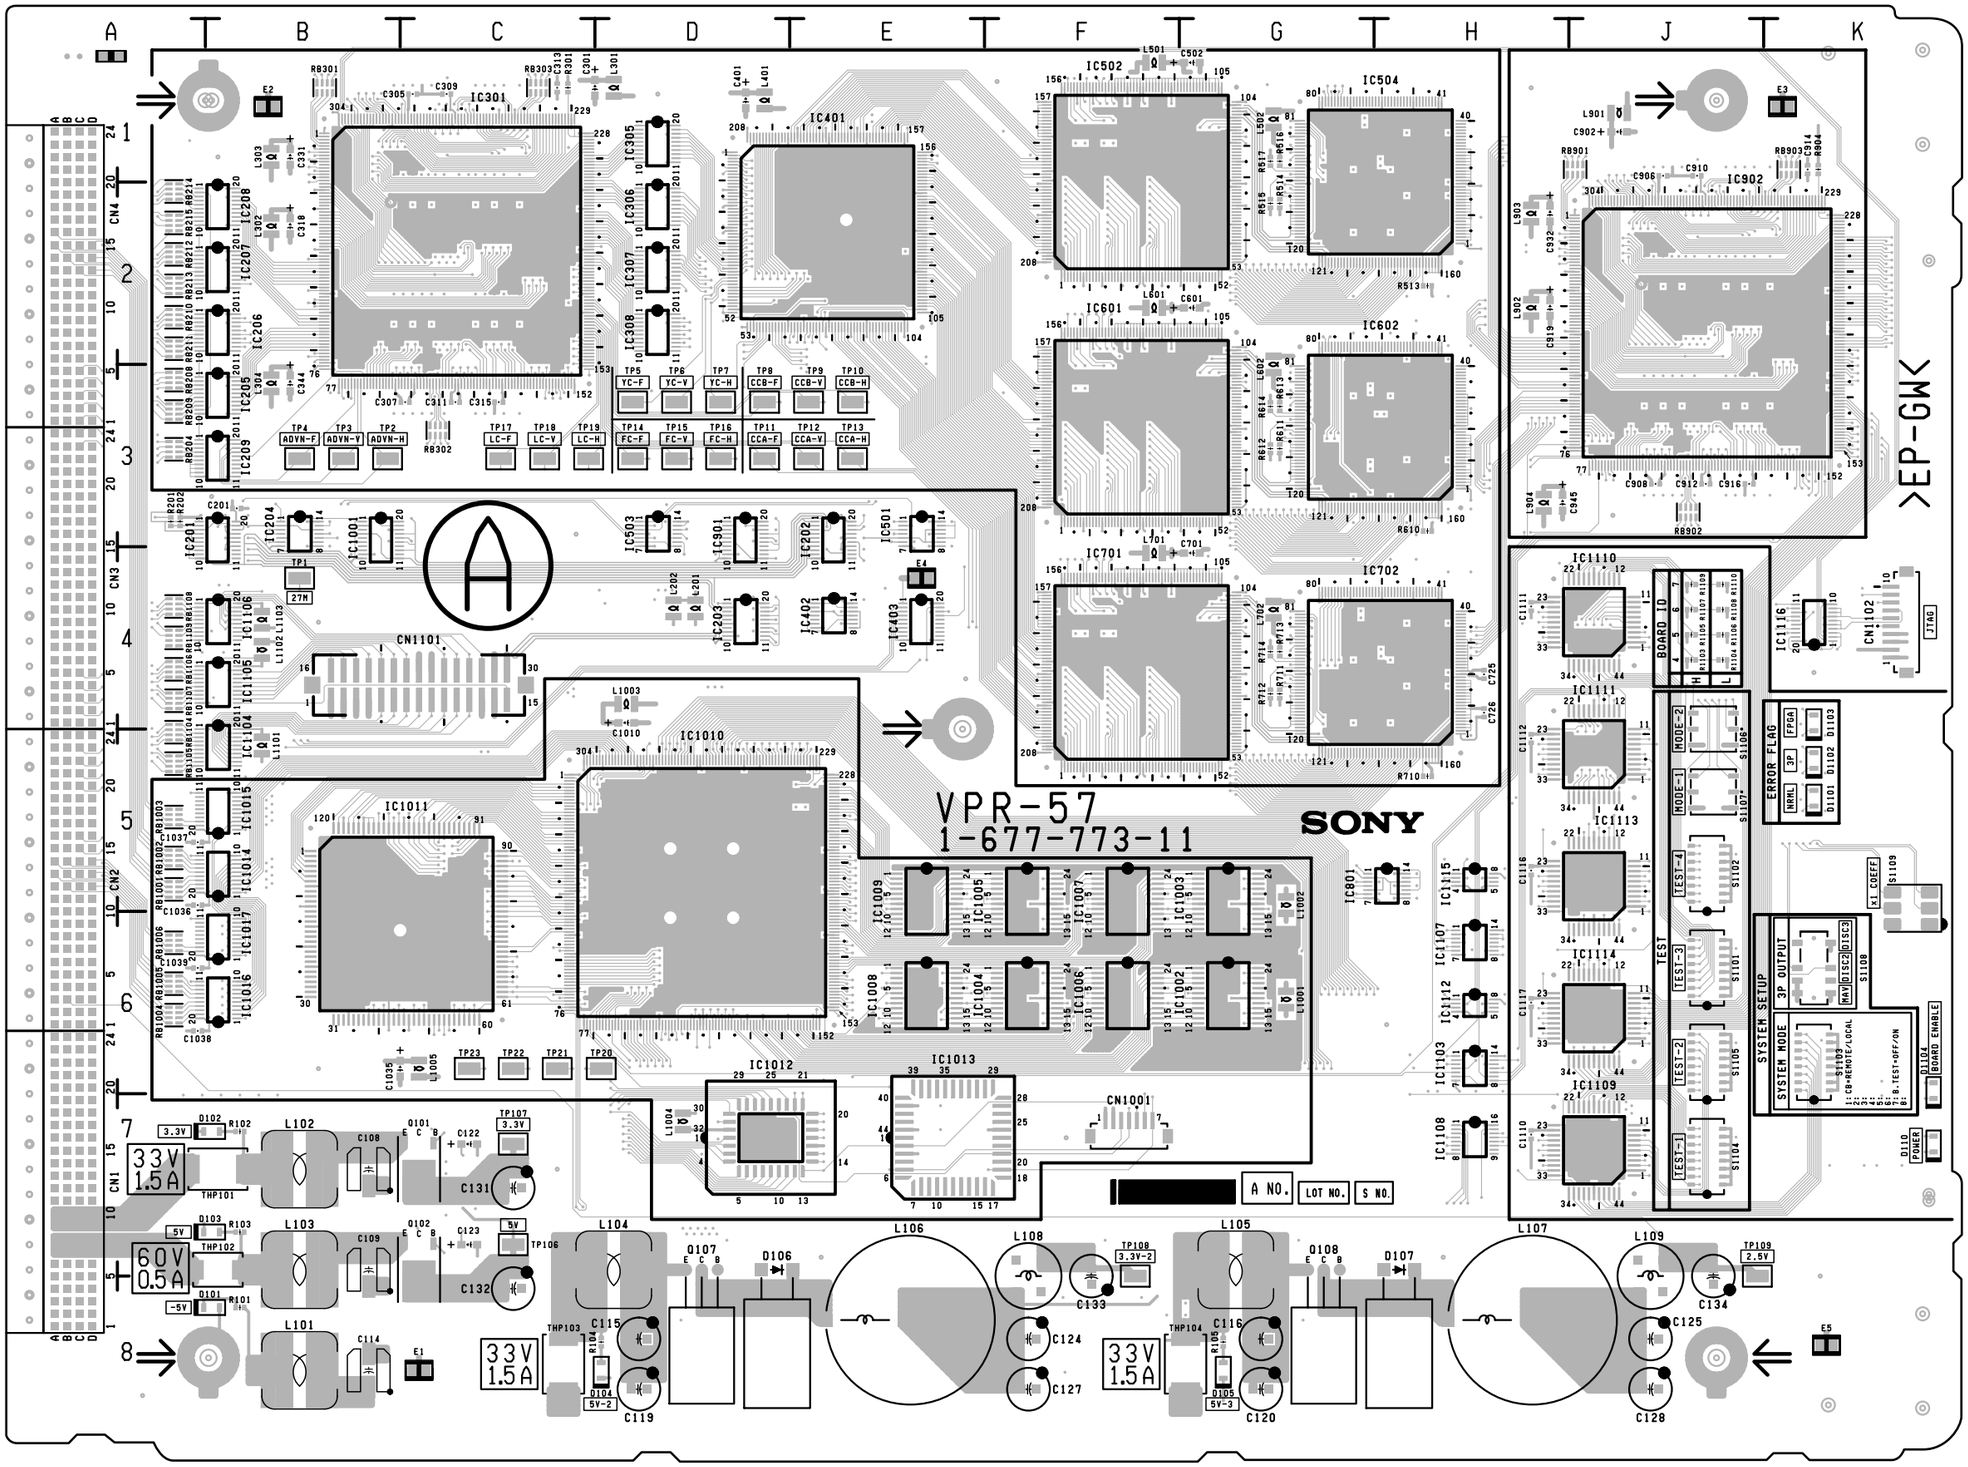

BKP-9330 (SY) : S/N 10001 through 10057

VPR-57 -A SIDE-
SUFFIX: -11

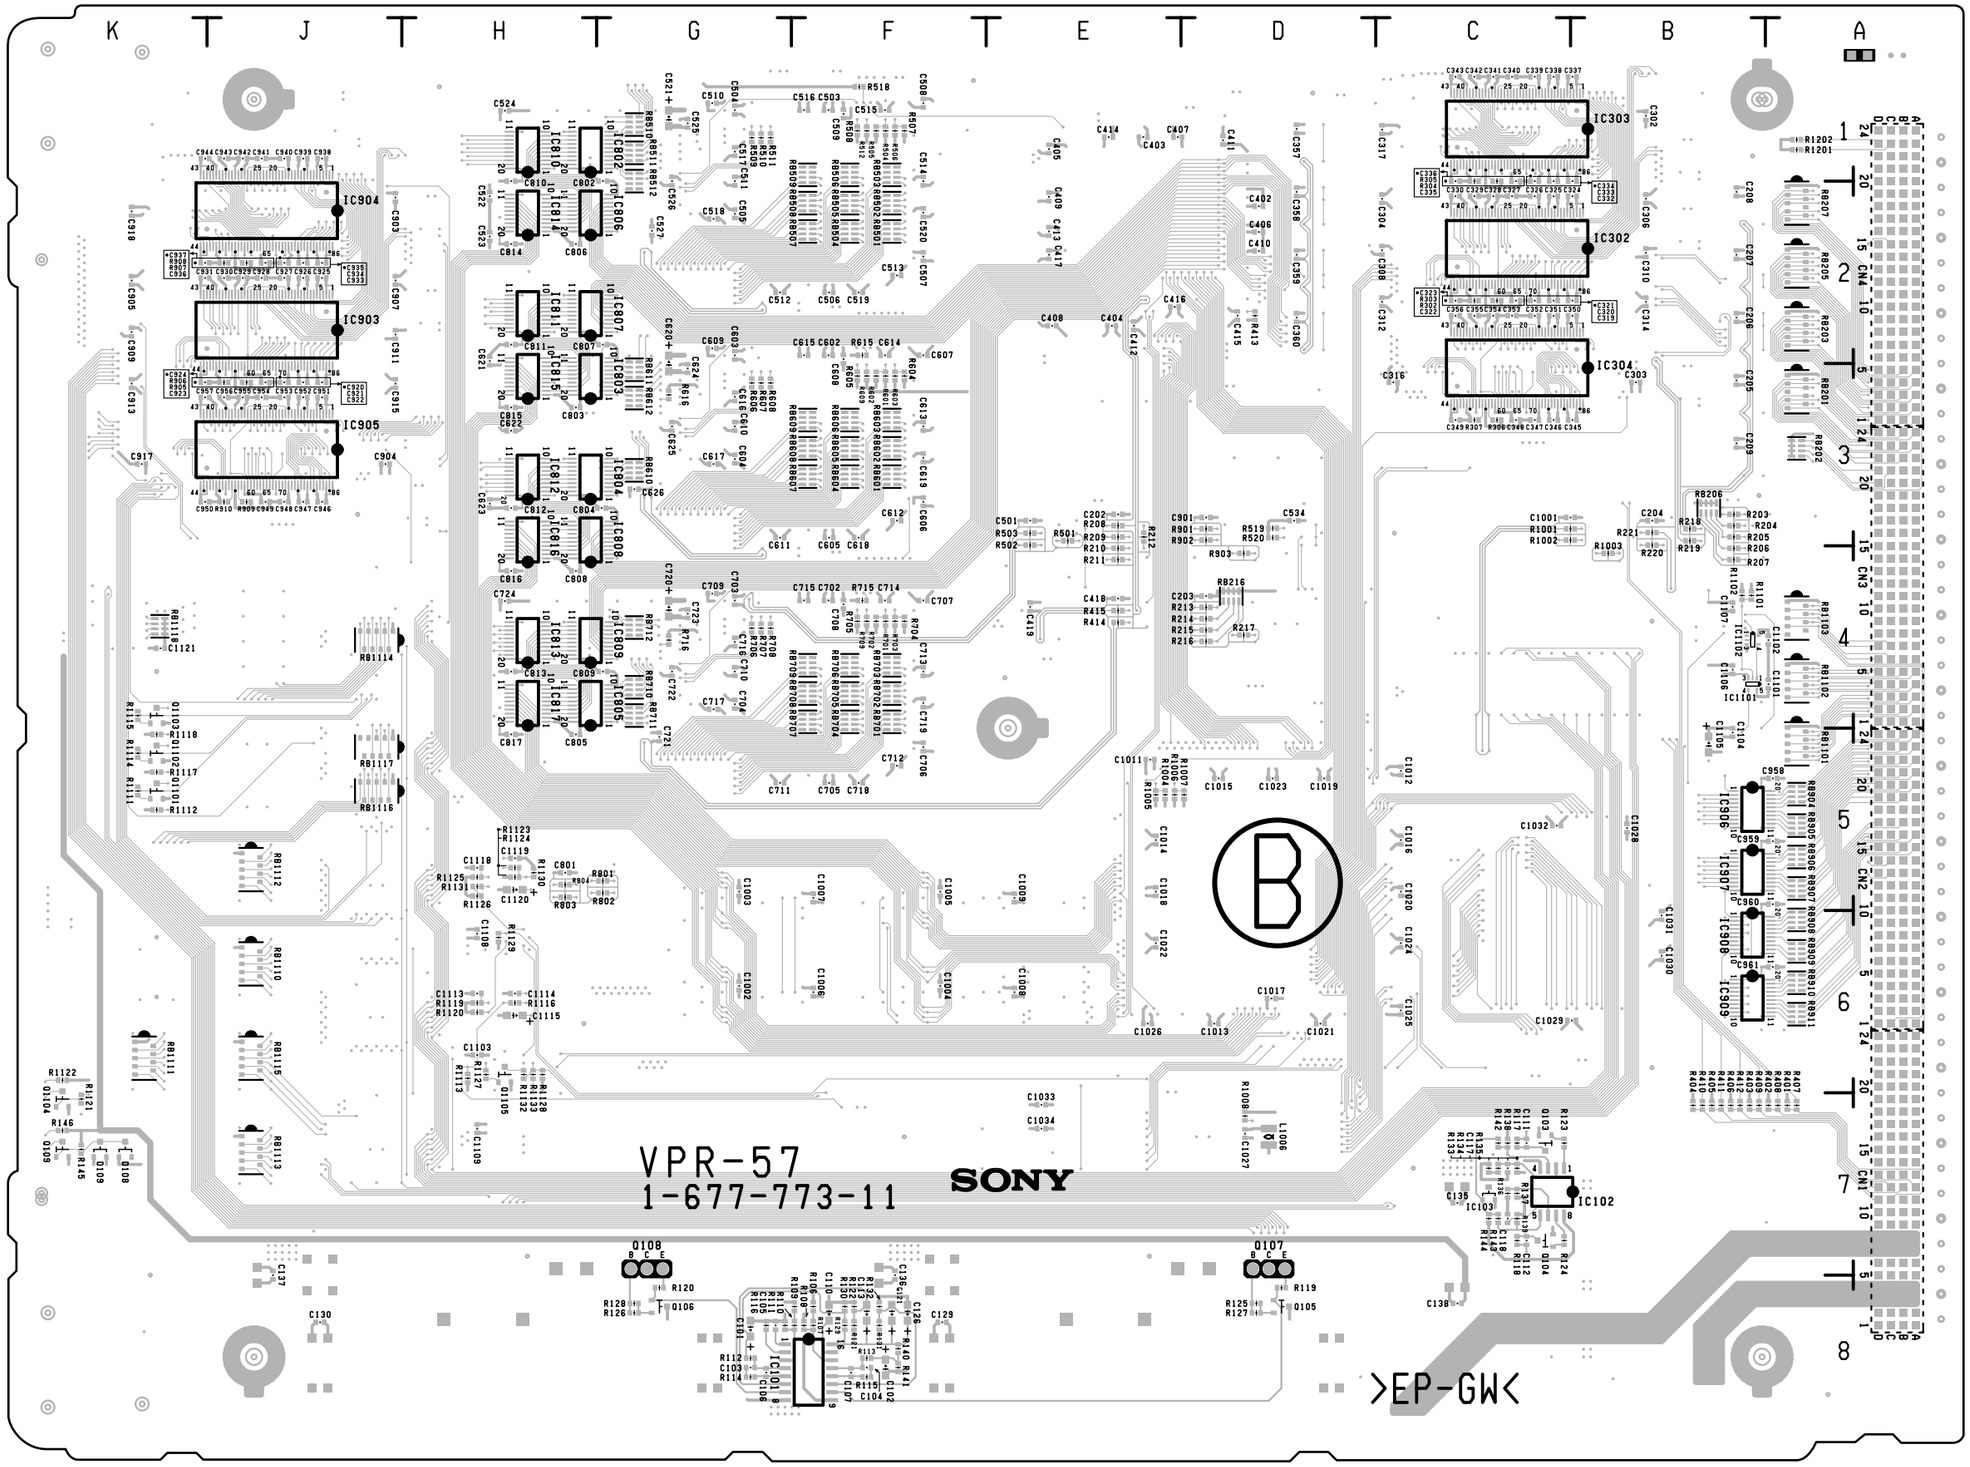

Components location list ; next page

VPR-57 -B SIDE-
SUFFIX: -11

VPR-57 (1-677-773-11)
---

*:B SIDE

C101	*G8	C344	B3	C701	G4	C948	*J3	D108	*K7	IC1103	H6	R125	*D8	R606	*G3	RB206	*B3	S1105	J6
C102	*F8	C345	*B3	C702	*F4	C949	*J3	D109	*K7	IC1104	A4	R126	*G8	R607	*G3	RB207	*A2	S1106	J4
C103	*G8	C346	*C3	C703	*G4	C950	*K3	D110	K7	IC1105	A4	R127	*D8	R608	*G3	RB208	A3	S1107	J5
C104	*F8	C347	*C3	C704	*G4	C951	*J3	D1101	K5	IC1106	A4	R128	*G8	R609	*F3	RB209	A3	S1108	K6
C105	*G8	C348	*C3	C705	*F5	C952	*J3	D1102	K5	IC1107	H6	R129	*F8	R610	H3	RB210	A2	S1109	K5
C106	*G8	C349	*C3	C706	*F5	C953	*J3	D1103	K4	IC1108	H7	R130	*F8	R611	G3	RB211	A2		
C107	*F8	C350	*B2	C707	*F4	C954	*J3	D1104	K6	IC1109	J7	R131	*F8	R612	G3	RB212	A2	THP101	B7
C108	B7	C351	*C2	C708	*F4	C955	*J3			IC1110	J4	R132	*F8	R613	G3	RB213	A2	THP102	B7
C109	B7	C352	*C2	C709	*G4	C956	*J3	E1	C8	IC1111	J5	R133	*C7	R614	G3	RB214	A2	THP103	C8
C110	*F8	C353	*C2	C710	*G4	C957	*K3	E2	B1	IC1112	H6	R134	*C7	R615	*F2	RB215	A2	THP104	G8
C111	*C7	C354	*C2	C711	*G5	C958	*A5	E3	K1	IC1113	J5	R135	*C7	R616	*G3	RB216	*D4		
C112	*C7	C355	*C2	C712	*F5	C959	*A5	E4	E4	IC1114	J6	R136	*C7	R701	*F4	RB301	B1	TP1	B4
C113	*F8	C356	*C2	C713	*F4	C960	*A5	E5	K8	IC1115	H5	R137	*C7	R702	*F4	RB302	C3	TP2	B3
C114	B8	C357	*D1	C714	*F4	C961	*A6			IC1116	K4	R138	*C7	R703	*F4	RB303	C1	TP3	B3
C115	D8	C358	*D2	C715	*F4	C1001	*C3	IC101	*G8			R139	*C7	R704	*F4	RB501	*F2	TP4	B3
C116	G8	C359	*D2	C716	*G4	C1002	*G6	IC102	*C7	L101	B8	R140	*F8	R705	*F4	RB502	*F2	TP5	D3
C117	*C7	C360	*D2	C717	*G4	C1003	*G5	IC103	*C7	L102	B7	R141	*F8	R706	*G4	RB503	*F1	TP6	D3
C118	*C7	C401	D1	C718	*F5	C1004	*F6	IC201	A3	L103	B7	R142	*C7	R707	*G4	RB504	*F2	TP7	D3
C119	D8	C402	*D2	C719	*F4	C1005	*F5	IC202	E3	L104	D7	R143	*C7	R708	*G4	RB505	*F2	TP8	D3
C120	G8	C403	*E1	C720	*G4	C1006	*F6	IC203	D4	L105	G7	R144	*C7	R709	*F4	RB506	*F1	TP9	E3
C121	*F8	C404	*E2	C721	*G5	C1007	*F5	IC204	B3	L106	E8	R145	*K7	R710	H5	RB507	*F2	TP10	E3
C122	C7	C405	*E1	C722	*G4	C1008	*E6	IC205	A3	L107	H8	R146	*K7	R711	G4	RB508	*F2	TP11	D3
C123	C7	C406	*D2	C723	*G4	C1009	*E5	IC206	A2	L108	F7	R201	A3	R712	G4	RB509	*F1	TP12	E3
C124	F8	C407	*E1	C724	*H4	C1010	D4	IC207	A2	L109	J7	R202	A3	R713	G4	RB510	*G1	TP13	E3
C125	J8	C408	*E2	C725	H4	C1011	*E5	IC208	A2	L201	D4	R203	*B3	R714	G4	RB511	*G1	TP14	D3
C126	*F8	C409	*E2	C726	H4	C1012	*C5	IC209	A3	L202	D4	R204	*B3	R715	*F4	RB512	*G1	TP15	D3
C127	F8	C410	*D2	C801	*H5	C1013	*D6	IC301	C2	L301	D1	R205	*B3	R716	*G4	RB601	*F3	TP16	D3
C128	J8	C411	*D1	C802	*G1	C1014	*E5	IC302	*B2	L302	B2	R206	*B4	R801	*G5	RB602	*F3	TP17	C3
C129	*F8	C412	*E2	C803	*H3	C1015	*D5	IC303	*B1	L303	B1	R207	*B4	R802	*G5	RB603	*F3	TP18	C3
C130	*J8	C413	*E2	C804	*G3	C1016	*C5	IC304	*B2	L304	B3	R208	*E3	R803	*H5	RB604	*F3	TP19	C3
C131	C7	C414	*E1	C805	*H5	C1017	*D6	IC305	D1	L401	D1	R209	*E3	R804	*H5	RB605	*F3	TP20	D6
C132	C8	C415	*D2	C806	*H2	C1018	*E5	IC306	D2	L501	F1	R210	*E4	R901	*D3	RB606	*F3	TP21	C6
C133	F7	C416	*E2	C807	*G2	C1019	*D5	IC307	D2	L502	G1	R211	*E4	R902	*D3	RB607	*F3	TP22	C6
C134	J7	C417	*E2	C808	*H4	C1020	*C5	IC308	D2	L601	F2	R212	*E3	R903	*D4	RB608	*F3	TP23	C6
C135	*C7	C418	*E4	C809	*G4	C1021	*D6	IC401	E2	L602	G2	R213	*D4	R904	K1	RB609	*F3	TP106	C7
C136	*F7	C419	*E4	C810	*H1	C1022	*E6	IC402	E4	L701	F4	R214	*D4	R905	*J3	RB610	*G3	TP107	C7
C137	*J7	C501	*E3	C811	*H2	C1023	*D5	IC403	E4	L702	G4	R215	*D4	R906	*J3	RB611	*G3	TP108	F7
C138	*C8	C502	G1	C812	*H3	C1024	*C6	IC501	E3	L901	J1	R216	*D4	R907	*J2	RB612	*G3	TP109	J7
C201	B3	C503	*F1	C813	*H4	C1025	*C6	IC502	F1	L902	H2	R217	*D4	R908	*J2	RB701	*F4		
C202	*E3	C504	*G1	C814	*H2	C1026	*E6	IC503	D3	L903	H2	R218	*B3	R909	*J3	RB702	*F4		
C203	*D4	C505	*G2	C815	*H3	C1027	*D7	IC504	H1	L904	H3	R219	*B3	R910	*J3	RB703	*F4		
C204	*B3	C506	*F2	C816	*H4	C1028	*B5	IC601	F3	L1001	G6	R220	*B3	R1001	*C3	RB704	*F4		
C205	*B3	C507	*F2	C817	*H5	C1029	*B6	IC602	H3	L1002	G5	R221	*B3	R1002	*C3	RB705	*F4		
C206	*B2	C508	*F1	C901	*D3	C1030	*B6	IC701	F4	L1003	D4	R301	C1	R1003	*B4	RB706	*F4		
C207	*B2	C509	*F1	C902	J1	C1031	*B6	IC702	H4	L1004	D7	R302	*C2	R1004	*E5	RB707	*F4		
C208	*B2	C510	*G1	C903	*J2	C1032	*C5	IC801	G5	L1005	C6	R303	*C2	R1005	*E5	RB708	*F4		
C209	*B3	C511	*G1	C904	*J3	C1033	*E7	IC802	*G1	L1006	*D7	R304	*C1	R1006	*E5	RB709	*F4		
C301	D1	C512	*G2	C905	*K2	C1034	*E7	IC803	*G3	L1101	B5	R305	*C1	R1007	*D5	RB710	*G4		
C302	*B1	C513	*F2	C906	J1	C1035	C6	IC804	*G3	L1102	B4	R306	*C3	R1008	*D7	RB711	*G4		
C303	*B3	C514	*F1	C907	*J2	C1036	A5	IC805	*G4	L1103	B4	R307	*C3	R1101	*B4	RB712	*G4		
C304	*C2	C515	*F1	C908	J3	C1037	A5	IC806	*G2			R401	*A7	R1102	*B4	RB901	J1		
C305	C1	C516	*F1	C909	*K2	C1038	A6	IC807	*G2	Q101	C7	R402	*A7	R1103	J4	RB902	J3		
C306	*B2	C517	*G1	C910	J1	C1039	A6	IC808	*G4	Q102	C7	R403	*B7	R1104	J4	RB903	K1		
C307	C3	C518	*G2	C911	*J2	C1101	*A4	IC809	*G4	Q103	*C7	R404	*B7	R1105	J4	RB904	*A5		
C308	*C2	C519	*F2	C912	J3	C1102	*A4	IC810	*H1	Q104	*C7	R405	*B7	R1106	J4	RB905	*A5		
C309	C1	C520	*F2	C913	*K3	C1103	*H6	IC811	*H2	Q105	*D8	R406	*B7	R1107	J4	RB906	*A5		
C310	*B2	C521	*G1	C914	K1	C1104	*B5	IC812	*H3	Q106	*G8	R407	*A7	R1108	J4	RB907	*A5		
C311	C3	C522	*H2	C915	*J3	C1105	*B5	IC813	*H4	Q107	D7	R408	*A7	R1109	J4	RB908	*A6		
C312	*C2	C523	*H2	C916	J3	C1106	*B4	IC814	*H2	Q108	G7	R409	*B7	R1110	J4	RB909	*A6		
C313	C1	C524	*H1	C917	*K3	C1107	*B4	IC815	*H3	Q109	*K7	R410	*B7	R1111	*K5	RB910	*A6		
C314	*B2	C525	*G1	C918	*K2	C1108	*H6	IC816	*H4	Q1101	*K5	R411	*B7	R1112	*K5	RB911	*A6		
C315	C3	C526	*G1	C919	H2	C1109	*H7	IC817	*H4	Q1102	*K5	R412	*B7	R1113	*H6	RB1001	A5		
C316	*C3	C527	*G2	C920	*J3	C1110	H7	IC901	D3	Q1103	*K4	R413	*D2	R1114	*K5	RB1002	A5		
C317	*C1	C534	*D3	C921	*J3	C1111	H4	IC902	J2	Q1104	*K7	R414	*E4	R1115	*K4	RB1003	A5		
C318	B2	C601	G2	C922	*J3	C1112	H5	IC903	*J2	Q1105	*H6	R415	*E4	R1116	*H6	RB1004	A6		
C319	*B2	C602	*F2	C923	*J3	C1113	*H6	IC904	*J1			R501	*E3	R1117	*K5	RB1005	A6		
C320	*C2	C603	*G2	C924	*K3	C1114	*H6	IC905	*J3	R101	B8	R502	*E3	R1118	*K5	RB1006	A6		
C321	*C2	C604	*G3	C925	*J2	C1115	*H6	IC906	*B5	R102	B7	R503	*E3	R1119	*H6	RB1101	*A5		
C322	*C2	C605	*F3	C926	*J2	C1116	H5	IC907	*B5	R103	B7	R504	*F1	R1120	*H6	RB1102	*A4		
C323	*C2	C606	*F3	C927	*J2	C1117	H6	IC908	*B6	R104	D8	R505	*F1	R1121	*K7	RB1103	*A4		
C324	*B2	C607	*F2	C928	*J2	C1118	*H5	IC909	*B6	R105	G8	R506	*F1	R1122	*K6	RB1104	A5		
C325	*C2	C608	*F2	C929	*J2	C1119	*H5	IC1001	B3	R106	*F8	R507	*F1	R1123	*H5	RB1105	A5		
C326	*C2	C609	*G2	C930	*J2	C1120	*H5	IC1002	G6	R107	*F8	R508	*F1	R1124	*H5	RB1106	A4		
C327	*C2	C610	*G3	C931	*K2	C1121	*K4	IC1003	G5	R108	*F8	R509	*G1	R1125	*H5	RB1107	A4		
C328	*C2	C611	*G3	C932	H2			IC1004	F6	R109	*F8	R510	*G1	R1126	*H5	RB1108	A4		
C329	*C2	C612	*F3	C933	*J2	CN1	A7	IC1005	F5	R110	*F8	R511	*G1	R1127	*H6	RB1109	A4		
C330	*C2	C613	*F3	C934	*J2	CN2	A5	IC1006	F6	R111	*G8	R512	*F1	R1128	*H6	RB1110	*J6		
C331	B1	C614	*F2	C935	*J2	CN3	A4	IC1007	F5	R112	*G8	R513	H2	R1129	*H6	RB1111	*K6		
C332	*B1	C615	*F2	C936	*J2	CN4	A2	IC1008	E6	R113	*F8	R514	G2	R1130	*H5	RB1112	*J5		
C333	*C1	C616	*G3	C937	*K2	CN1001	F7	IC1009	E5	R114	*G8	R515	G2	R1131	*H5	RB1113	*J7		
C334	*C1	C617	*G3	C938	*J1	CN1101	C4	IC1010	D5	R115	*F8	R516	G1	R1132	*H6	RB1114	*J4		
C335	*C1	C618	*F3	C939	*J1	CN1102	K4	IC1011	C6	R116	*G8	R517	G1	R1133	*H6	RB1115	*J6		
C336	*C1	C619	*F3	C940	*J1			IC1012	D7	R117	*C7	R518	*F1	R1201	*A1	RB1116	*J5		
C337	*B1	C620	*G2	C941	*J1	D101	B8	IC1013	E7	R118	*C7	R519	*D3	R1202	*A1	RB1117	*J5		
C338	*C1	C621	*H2	C942	*J1	D102	B7	IC1014	B5	R119	*D8	R520	*D3			RB1118	*K4		
C339	*C1	C622	*H3	C943	*J1	D103	B7	IC1015	B5	R120	*G8	R601	*F3	RB201	*A3				
C340	*C1	C623	*H3	C944	*K1	D104	D8	IC1016	B6	R121	*F8	R602	*F3	RB202	*A3	S1101	J6		
C341	*C1	C624	*G3	C945	H3	D105	G8	IC1017	B6	R122	*F8	R603	*F3	RB203	*A2	S1102	J5		
C342	*C1	C625	*G3	C946	*J3	D106	D7	IC1101	*B4	R123	*C7	R604	*F3	RB204	A3	S1103	K6		
C343	*C1	C626	*G3	C947	*J3	D107	H7	IC1102	*B4	R124	*C7	R605	*F3	RB205	*A2	S1104	J7		

このマニュアルに記載されている事柄の著作権は当社にあります。
従って，当社の許可なしに無断で複写したり，説明内容（操作，保守等）と異なる目的で本マニュアルを使用することを禁止します。

The material contained in this manual consists of information that is the property of Sony Corporation.
Sony Corporation expressly prohibits the duplication of any portion of this manual or the use thereof for any purpose other than the operation or maintenance of the equipment described in this manual without the express written permission of Sony Corporation.

Le matériel contenu dans ce manuel consiste en informations qui sont la propriété de Sony Corporation.
Sony Corporation interdit formellement la copie de quelque partie que ce soit de ce manuel ou son emploi pour tout autre but que des opérations ou entretiens de l'équipement à moins d'une permission écrite de Sony Corporation.

Das in dieser Anleitung enthaltene Material besteht aus Informationen, die Eigentum der Sony Corporation sind.
Die Sony Corporation untersagt ausdrücklich die Vervielfältigung jeglicher Teile dieser Anleitung oder den Gebrauch derselben für irgendeinen anderen Zweck als die Bedienung oder Wartung der in dieser Anleitung beschriebenen Ausrüstung ohne ausdrückliche schriftliche Erlaubnis der Sony Corporation.

CCU-900 (J, UC)
CCU-900P (CE)
BKP-9330 (SY) J, E
9-968-570-02

Sony Corporation
Communication System Solutions Network Company

Printed in Japan
2000. 12 16
©2000