SONY

HD COLOR CAMERA

# HDC1000
# HDC1100
# HDC1400
# HDC1450
# HDC1500
# HDC1550
# HDC1580
# HDC1600

Digital HDVS

Power HAD EX

MEMORY STICK ™

MAINTENANCE MANUAL

Volume 2 1st Edition (Revised 6)

## ⚠警告

このマニュアルは，サービス専用です。
お客様が，このマニュアルに記載された設置や保守，点検，修理などを行うと感電や火災，人身事故につながることがあります。
危険をさけるため，サービストレーニングを受けた技術者のみご使用ください。

## ⚠ WARNING

This manual is intended for qualified service personnel only.
To reduce the risk of electric shock, fire or injury, do not perform any servicing other than that contained in the operating instructions unless you are qualified to do so. Refer all servicing to qualified service personnel.

## ⚠ WARNUNG

Die Anleitung ist nur für qualifiziertes Fachpersonal bestimmt.
Alle Wartungsarbeiten dürfen nur von qualifiziertem Fachpersonal ausgeführt werden. Um die Gefahr eines elektrischen Schlages, Feuergefahr und Verletzungen zu vermeiden, sind bei Wartungsarbeiten strikt die Angaben in der Anleitung zu befolgen. Andere als die angegeben Wartungsarbeiten dürfen nur von Personen ausgeführt werden, die eine spezielle Befähigung dazu besitzen.

## ⚠ AVERTISSEMENT

Ce manual est destiné uniquement aux personnes compétentes en charge de l’entretien. Afin de réduire les risques de décharge électrique, d’incendie ou de blessure n’effectuer que les réparations indiquées dans le mode d’emploi à moins d’être qualifié pour en effectuer d’autres. Pour toute réparation faire appel à une personne compétente uniquement.

Serial No. 10001 and Higher: HDC1000 (UCJ)
Serial No. 30001 and Higher: HDC1000 (J)
Serial No. 40001 and Higher: HDC1000 (CE)
Serial No. 30001 and Higher: HDC1100 (J)
Serial No. 10001 and Higher: HDC1400 (UC)
Serial No. 30001 and Higher: HDC1400 (J)
Serial No. 400001 and Higher: HDC1400 (CE)
Serial No. 50001 and Higher: HDC1400 (E)
Serial No. 10001 and Higher: HDC1450 (UC)
Serial No. 400001 and Higher: HDC1450 (CE)
Serial No. 30001 and Higher: HDC1500 (J)
Serial No. 10001 and Higher: HDC1500 (SY)
Serial No. 40001 and Higher: HDC1500 (CE)
Serial No. 400001 and Higher: HDC1500 (CE)
Serial No. 50001 and Higher: HDC1500 (E)
Serial No. 10001 and Higher: HDC1550 (UC)
Serial No. 40001 and Higher: HDC1550 (CE)
Serial No. 400001 and Higher: HDC1550 (CE)
Serial No. 50001 and Higher: HDC1580 (CN)
Serial No. 30001 and Higher: HDC1600 (J)

# 目次 / Table of Contents

## このマニュアルについて


本書の目的 ..... 3 (J)
関連マニュアル ..... 3 (J)


## Manual Structure


Purpose of this manual ..... 3 (E)
Related manuals ..... 3 (E)


## 1. Spare Parts


1-1. 補修部品注意事項 ..... 1-1
1-1. Notes on Repair Parts ..... 1-1
1-2. Exploded Views ..... 1-3
1-2-1. HDC1000/1100 ..... 1-3
1-2-2. HDC1400/1450/1500/1550/1580/1600 ..... 1-16
1-3. Electrical Parts List ..... 1-35
1-4. Optional Fixtures ..... 1-237
1-5. Supplied Accessories ..... 1-237
1-5-1. HDC1000/1100 ..... 1-237
1-5-2. HDC1400/1450/1500/1550/1580/1600 ..... 1-237


## 2. Semiconductor Pin Assignments

## 3. Block Diagrams


Overall (HDC1000/1100/1400/1450/1500/1550/1600) .. 3-2
Overall (HDC1580) ..... 3-3
AU-298 ..... 3-5
DAP-33 ..... 3-5
AT-163 ..... 3-6
DPR-265 ..... 3-8
DPR-265C ..... 3-9
SDI-84 ..... 3-10
SDI-84C ..... 3-11
VDA-63 ..... 3-12
TG-243 ..... 3-13
TG-247 ..... 3-14
MX-109 ..... 3-15
TR-136 ..... 3-16


## 4. Schematic Diagrams


AT-163 ..... 4-3
AT-166 ..... 4-10
AU-298 ..... 4-12
BI-175 ..... 4-16
BI-187 ..... 4-17
BI-188 ..... 4-18
BI-189 ..... 4-19
CN-2578 ..... 4-20
CN-2579 ..... 4-21
CN-2602 ..... 4-22
CN-2603/2603B ..... 4-22
CN-2604 ..... 4-23
CN-2605 ..... 4-23
CN-2606 ..... 4-24
CN-2607 ..... 4-24
CN-2608 ..... 4-24
CN-2609 ..... 4-25
CN-2614/2614B ..... 4-25
CN-2615 ..... 4-26
CN-2616 ..... 4-26
CN-2617 ..... 4-27
CN-2618 ..... 4-28
CN-2619 ..... 4-28
CN-2620 ..... 4-29
CN-2621 ..... 4-29
CN-2621GA ..... 4-29 (a)
CN-2622 ..... 4-30
CN-2623 ..... 4-30
CN-2640 ..... 4-30
CN-2671 ..... 4-30
CN-2712 ..... 4-31
CN-2723 ..... 4-32
DAP-33 ..... 4-33
DPR-265 ..... 4-37
DPR-265C ..... 4-49
DR-528 ..... 4-62
DR-562 ..... 4-64
FL-337 ..... 4-67
FL-338 ..... 4-67
LE-291 ..... 4-68
LE-308 ..... 4-70
LE-309 ..... 4-71

MB-1059 ..... 4-72
MB-1059/1059G/1059GA ..... 4-72 (a)
MB-1060 ..... 4-74
MX-109 ..... 4-78
PA-317 ..... 4-83
PA-317C ..... 4-87
PA-327 ..... 4-91
SDI-84 ..... 4-95
SDI-84C ..... 4-103
SW-1233 ..... 4-110
SW-1236 ..... 4-112
SW-1237 ..... 4-112
SW-1238 ..... 4-113
SW-1239 ..... 4-113
SW-1240 ..... 4-113
SW-1241/1241B ..... 4-114
SW-1242 ..... 4-114
SW-1245 ..... 4-114
SW-1273 ..... 4-115
TG-243 ..... 4-116
TG-243BG ..... 4-120
TG-243C ..... 4-124
TG-247 ..... 4-128
TR-136 ..... 4-132
VDA-63 ..... 4-139
Frame Wiring (HDC1000/1100) ..... 4-144
Frame Wiring (HDC1500/1550/1600/1400/1450) ..... 4-145
Frame Wiring (HDC1580) ..... 4-146

## 5. Board Layouts

AT-163 ..... 5-2
AT-166 ..... 5-3
AU-298 ..... 5-4
BI-175 ..... 5-5
BI-187 ..... 5-5
BI-188 ..... 5-6
BI-189 ..... 5-6
CN-2578 ..... 5-7
CN-2579 ..... 5-7
CN-2602 ..... 5-7
CN-2605 ..... 5-7
CN-2603 ..... 5-8
CN-2604 ..... 5-9
CN-2606 ..... 5-9
CN-2607 ..... 5-10
CN-2608 ..... 5-10
CN-2609 ..... 5-10
CN-2614 ..... 5-11
CN-2614B ..... 5-11
CN-2615 ..... 5-11
CN-2616 ..... 5-11
CN-2617 ..... 5-11
CN-2618 ..... 5-11
CN-2619 ..... 5-12
CN-2620 ..... 5-12
CN-2621 ..... 5-13
CN-2622 ..... 5-14
CN-2623 ..... 5-14
CN-2640 ..... 5-14
CN-2671 ..... 5-14
CN-2712 ..... 5-14
CN-2723 ..... 5-14
DAP-33 ..... 5-15
DPR-265 ..... 5-16
DR-528 ..... 5-18
DR-562 ..... 5-19
DU-369 ..... 5-19
FL-337 ..... 5-20
FL-338 ..... 5-20
LE-291 ..... 5-21
LE-308 ..... 5-21
LE-309 ..... 5-21
MB-1059 ..... 5-23
MB-1059G ..... 5-23 (b)
MB-1060 ..... 5-24
MX-109 ..... 5-27
PA-317 ..... 5-28
PA-327 ..... 5-29
SDI-84 ..... 5-30
SW-1233 ..... 5-32
SW-1236 ..... 5-33
SW-1237 ..... 5-33
SW-1238 ..... 5-33
SW-1239 ..... 5-33
SW-1240 ..... 5-33
SW-1242 ..... 5-33

SW-1245 ..... 5-33
SW-1241 ..... 5-34
SW-1273 ..... 5-35
TG-243 ..... 5-36
TG-247 ..... 5-37
TR-136 ..... 5-38
VDA-63 ..... 5-40

# このマニュアルについて

## 本書の目的

本書は，HD COLOR CAMERA HDC1000/1100/1400/1500/1600 のメンテナンスマニュアル Volume 2 です。
本書は，システム／サービスエンジニアの方々にご使用いただくことを想定し，部品レベルまでのサービスを前提とした情報（パーツリスト，回路図，マウント図等）を記載しています。

## 関連マニュアル

本機には，この「メンテナンスマニュアル Volume 2」のほかに，下記のマニュアルが用意されています。

- **HDC1000 シリーズ　オペレーションマニュアル（HDC1000/1100 に付属）**
  HDC1000/1100 を実際に運用および操作するのに必要なマニュアルです。
  部品番号：3-903-903-0X

- **HDC1500 シリーズ　オペレーションマニュアル（HDC1400/1500/1600 に付属）**
  HDC1500/1600 を実際に運用および操作するのに必要なマニュアルです。
  部品番号：3-868-749-0X

- **メンテナンスマニュアル Volume 1（別途用意）**
  HDC1000/1100/1400/1500/1600の保守に関する情報と，部品交換および調整などのサービスに関する情報を記載しています。
  部品番号：9-968-211-0X

- **“Semiconductor Pin Assignments”CD-ROM 版（別途用意）**
  この“Semiconductor Pin Assignments”CD-ROM版は，放送用および業務用の機器に使用されている半導体を検索することができます。
  メンテナンスマニュアル Volume 2 には，その機種に使用されている半導体一覧とそのID番号を記載していますので，このCD-ROM版と合わせて使用してください。
  部品番号：9-968-546-06

# Manual Structure

## Purpose of this manual

This manual is the maintenance manual Volume 2 for HD Color Camera HDC1000/1400/1450/1500/1550/1580.
This manual describes the information items that premise the service based on the components parts such as spare parts lists, schematic diagrams and board layouts, assuming use of system and service engineers.

## Related manuals

Besides this maintenance manual Volume 2 the following manual is available for this unit.

- **HDC1000 Series Operation Manual (Supplied with HDC1000)**
  This manual is necessary for application and operation of HDC1000.
  Part number: 3-903-903-0X

- **HDC1500 Series Operation Manual (Supplied with HDC1400/1450/1500/1550)**
  This manual is necessary for application and operation of HDC1500/1550.
  Part number: 3-868-749-0X

- **HDC1580 Operation Manual (Supplied with HDC1580)**
  This manual is necessary for application and operation of HDC1580.
  Part number: 3-992-285-0X

- **Maintenance Manual Volume 1 (Available on request)**
  Describes the maintenance and service information necessary for parts replacement and adjustments of HDC1000/1400/1450/1500/1550/1580.
  Part number: 9-968-212-0X

- **“Semiconductor Pin Assignments” CD-ROM (Available on request)**
  This “Semiconductor Pin Assignments” CD-ROM allows you to search for semiconductors used in Broadcast and Professional equipment.
  The maintenance manual Volume 2 contains a complete list of semiconductors and their ID Nos., and thus should be used together with the CD-ROM.
  Part number: 9-968-546-06

# Section 1
# Spare Parts

## 1-1. Notes on Repair Parts

### 1. Safety Related Components Warning

**WARNING**

Components marked ⚠ are critical to safe operation. Therefore, specified parts should be used in the case of replacement.

### 2. Standardization of Parts

Some repair parts supplied by Sony differ from those used for the unit. These are because of parts commonality and improvement.
Parts list has the present standardized repair parts.

### 3. Stock of Parts

Parts marked with “o” at SP (Supply Code) column of the spare parts list may not be stocked. Therefore, the delivery date will be delayed.

### 4. Harness

Harnesses with no part number are not registered as spare parts.

## 1-1. 補修部品注意事項

### 1. 安全重要部品

⚠警告

⚠印のついた部品は安全性を維持するために重要な部品です。したがって，交換する時は必ず指定の部品を使ってください。

### 2. 部品の共通化

ソニーから供給する補修用部品は，セットに使われているものと異なることがあります。
これは部品の共通化，改良等によるものです。
部品表には現時点での共通化された補修用部品が記載されています。

### 3. 部品の在庫

部品表のSP (Supply code) 欄に“o”で示される部品は在庫していないことがあり，納期が長くなることがあります。

### 4. ハーネス

部品番号が記載されていないハーネスは，サービス部品として登録されていません。

## 1-2. Exploded Views

### 1-2-1. HDC1000/1100




| No. | Part No. | SP | Description |
|---|---|---|---|
| 1 | 3-992-431-01 | s | COVER, FRONT |
| 2 | A-8278-526-E | s | COVER ASSY,FRONT(H1) |
| 3 | X-3692-305-1 | o | RETAINER ASSY,LENS |
| 4 | 1-788-329-11 | s | DISK UNIT, FILTER |
| 5 | 2-280-511-12 | o | BRACKET,ADJUSTMENT ANGLE |
| 6 | 2-391-520-21 | s | BOLT (M5X12),HOLE, HEXAGON(ST) |
| 7 | 2-623-773-11 | s | BOLT (M3X8),STAINLESS |
| 8 | 3-992-867-01 | s | FOOT, FRONT (ABS) |
| 9 | 3-545-657-11 | s | BUSHING(BLACK) (PLA) |
| 10 | 3-612-710-02 | o | CLAMP,CABLE |
| 11 | 3-612-712-01 | s | BAND,CLAMP |
| 12 | 3-615-750-62 | s | SHIELD CUSHION(C) |
| 13 | 3-627-269-02 | o | SHEET,HEAT CONDUCTION(OHB) |
| 14 | 3-627-897-02 | s | PANEL,FRONT |
| 15 | 3-657-657-00 | s | SCREW (M5) |
| 16 | 3-673-018-00 | s | SCREW,BLIND (PLA) (WHITE) |
| | 3-673-018-11 | s | SCREW, BLIND (PLA) (BLACK) |
| 17 | 3-701-440-21 | s | WASHER PLASTIC (3.5X6X0.5) |
| 18 | 3-725-907-01 | s | BUSHING,BLIND |
| 19 | 4-866-663-01 | s | SPRING,COMPRESSION |
| 20 | 1-963-954-11 | s | SUB HARNESS(LENS) |
| | 7-621-773-95 | s | SCREW +B2.6X6(EP-FE/ZNBK/CM2) |
| | 7-623-208-22 | s | SPRING WASHER (3MM) |
| | 7-682-247-04 | s | SCREW +K 3X6 |
| | 7-682-548-04 | s | SCREW +B3X8 |
| | 7-682-903-01 | s | SCREW +PWH 3X5 |
| | 7-682-904-21 | s | SCREW +PWH 4X10 |
| | 7-682-951-01 | s | SCREW +PSW 3X14 |

# CCD Unit (HDC1000/1100)



| No. | Part No. | SP | Description |
|---|---|---|---|
| 101 | ⚠ A-1099-261-A | s | MOUNTED CIRCUIT BOARD, CN-2578 (for HDC1000) |
| | ⚠ A-1099-206-A | s | MOUNTED CIRCUIT BOARD, CN-2712 (for HDC1100) |
| 102 | A-1153-996-C | s | CCD UNIT 1000HDC (for HDC1000) |
| | A-1153-997-B | s | CCD UNIT 1100HDC (for HDC1100) |
| 103 | ⚠* A-1159-980-A | s | MOUNTED CIRCUIT BOARD, TG-243G (GOLD) (for HDC1000) |
| | ⚠* A-1101-922-A | s | MOUNTED CIRCUIT BOARD, TG-243 (SILVER) (for HDC1000) |
| | ⚠* A-1159-992-A | s | MOUNTED CIRCUIT BOARD, TG-247G (GOLD) (for HDC1100) |
| | ⚠* A-1126-983-A | s | MOUNTED CIRCUIT BOARD, TG-247 (SILVER) (for HDC1100) |
| 104 | ⚠* A-1159-981-A | s | MOUNTED CIRCUIT BOARD, DR-528G (GOLD) (for HDC1000) |
| | ⚠* A-1099-260-A | s | MOUNTED CIRCUIT BOARD, DR-528 (SILVER) (for HDC1000) |
| | ⚠* A-1159-993-A | s | MOUNTED CIRCUIT BOARD, DR-562G (GOLD) (for HDC1100) |
| | ⚠* A-1099-205-A | s | MOUNTED CIRCUIT BOARD, DR-562 (SILVER) (for HDC1100) |
| 105 | ⚠* A-1159-982-A | s | MOUNTED CIRCUIT BOARD, PA-317G (GOLD) (for HDC1000) |
| | ⚠* A-1099-263-A | s | MOUNTED CIRCUIT BOARD, PA-317 (SILVER) (for HDC1000) |
| | ⚠* A-1159-994-A | s | MOUNTED CIRCUIT BOARD, PA-327G (GOLD) (for HDC1100) |
| | ⚠* A-1099-203-A | s | MOUNTED CIRCUIT BOARD, PA-327 (SILVER) (for HDC1100) |
| 106 | ⚠* A-1159-983-A | s | MOUNTED CIRCUIT BOARD, CN-2579G (GOLD) (for HDC1000) |
| | ⚠* A-1099-262-A | s | MOUNTED CIRCUIT BOARD, CN-2579 (SILVER) (for HDC1000) |
| | ⚠* A-1159-995-A | s | MOUNTED CIRCUIT BOARD, CN-2723G (GOLD) (for HDC1100) |
| | ⚠* A-1099-210-A | s | MOUNTED CIRCUIT BOARD, CN-2723 (SILVER) (for HDC1100) |
| 107 | 1-758-483-11 | o | FILTER UNIT, OPTICAL |
| 108 | * 1-831-656-11 | s | CABLE, FLEXIBLE FLAT (30 CORE) (GOLD) |
| | * 1-830-735-11 | s | CABLE, FLEXIBLE FLAT (30 CORE) (SILVER) |
| 109 | * 1-831-659-11 | s | CABLE, FLEXIBLE FLAT (45 CORE) (GOLD) (for HDC1000) |
| | * 1-830-484-11 | s | CABLE, FLEXIBLE FLAT (45 CORE) (SILVER) (for HDC1000) |
| | * 1-831-660-11 | s | CABLE, FLEXIBLE FLAT (50 CORE) (GOLD) (for HDC1100) |
| | * 1-830-794-11 | s | CABLE, FLEXIBLE FLAT (50 CORE) (SILVER) (for HDC1100) |
| 110 | * 1-831-658-11 | s | CABLE, FLEXIBLE FLAT (40 CORE) (GOLD) |
| | * 1-830-485-11 | s | CABLE, FLEXIBLE FLAT (40 CORE) (SILVER) |
| 111 | 3-699-048-01 | s | CAP,MOUNT |
| 112 | 3-729-076-11 | s | SCREW +B2X4 (STEEL) |
| 113 | 3-965-077-01 | s | SCREW, SPECIAL (M2) |
| 114 | 4-644-165-01 | s | SCREW (M2.6X4),0 PLATE P1 MAIN |
| 115 | 3-729-013-31 | s | HEAD (+P1.4X3),WASHER |
| 116 | 9-885-001-63 | s | LEVER, MOUNT |
| 117 | 9-885-018-96 | s | RING, BAYONET |
| | 7-627-452-18 | s | SCREW,PRECISION +K 2X3 |

*: メンテナンスマニュアル Volume 1 の「1-6. 部品交換時の注意事項」を参照してください。
*: Refer to Section 1-6. “Notes for Replacing Parts” of the Maintenance Manual volume 1.
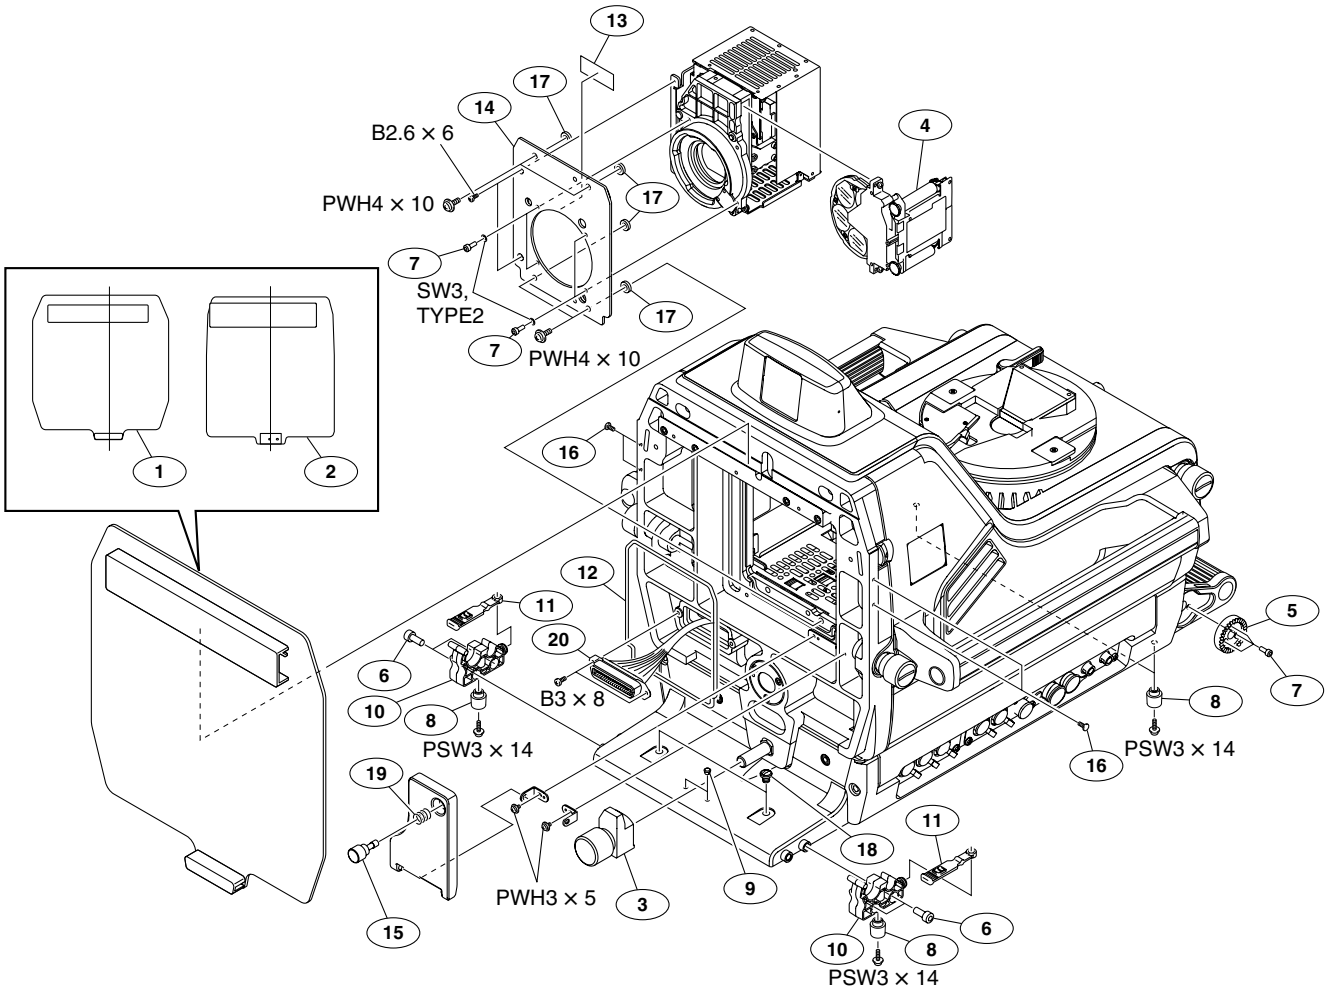
# Right Side Panel and Boards (HDC1000/1100)




| No. | Part No. | SP | Description |
|---|---|---|---|
| 201 | ⚠ A-1101-923-A | s | MOUNTED CIRCUIT BOARD, VDA-63 |
| 202 | ⚠ A-1101-924-A | s | MOUNTED CIRCUIT BOARD, AU-298 |
| 203 | ⚠ A-1101-925-A | s | MOUNTED CIRCUIT BOARD, DAP-33 |
| 204 | ⚠ A-1101-926-A | s | MOUNTED CIRCUIT BOARD, AT-163 |
| 205 | X-3692-313-3 | o | STAY (RIGHT) ASSY |
| 206 | ⚠ 1-478-790-11 | s | CONVERTER UNIT, DC-DC |
| 207 | 3-185-871-02 | s | TAPE, DROP PROTECTION SHIELD |
| 208 | 3-185-878-01 | s | WASHER (PA) |
| 209 | 3-185-887-01 | o | SCREW, KNOB |
| 210 | 3-185-890-01 | s | BOLT, SHOULDER (SUS) |
| 211 | 3-185-905-02 | o | SOLENOID |
| 212 | 3-605-906-01 | o | CAP,LATCH (WHITE) |
| | 3-605-906-11 | s | CAP,LATCH (BLACK) |
| 213 | 3-612-402-02 | o | HANDLE COVER(C) (WHITE) |
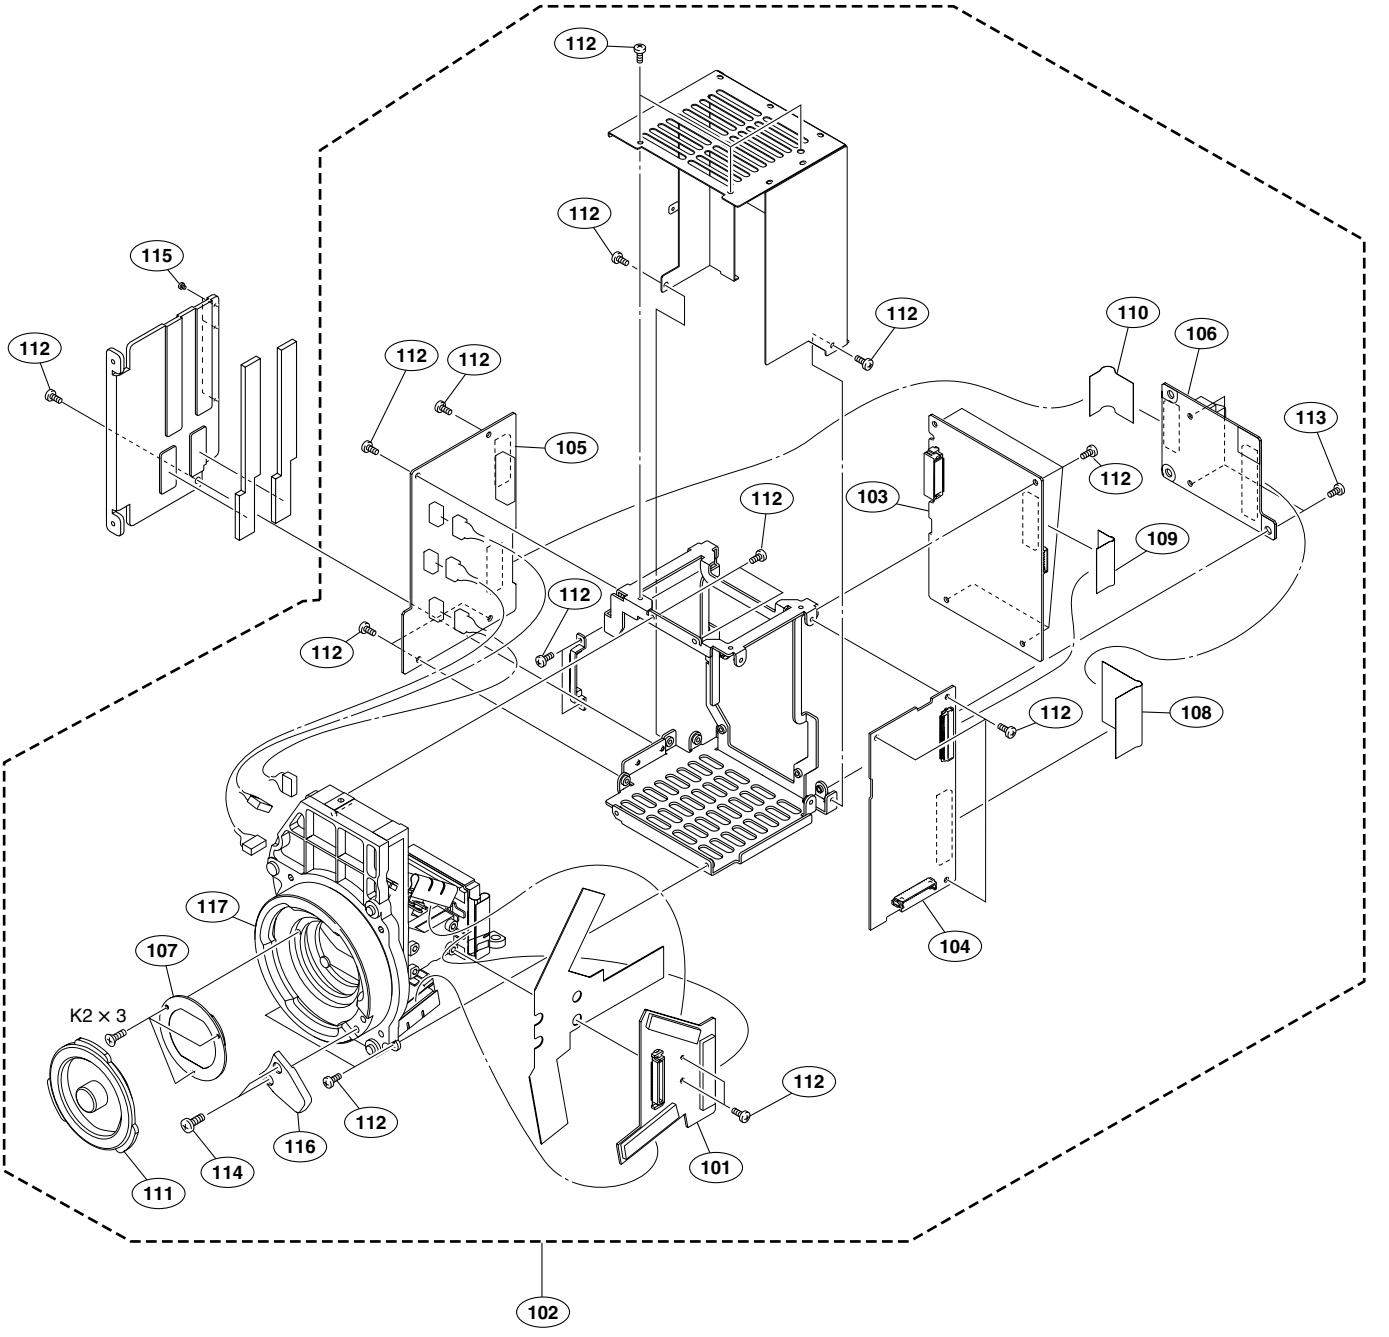
| No. | Part No. | SP | Description |
|---|---|---|---|
| 214 | 3-615-750-62 | s | SHIELD CUSHION(C) |
| 215 | 3-701-505-00 | s | SET-SCREW,HEX 3X3 ST |
| 216 | 3-701-510-00 | s | SET-SCREW,HEXGON 4X4 (WP) ST |
| 217 | 3-872-620-01 | s | THERMATTACH TAPE(DD) |
| 218 | 3-872-695-01 | s | BOARD CUSHION |
| 219 | 4-367-209-00 | s | SPRING,COMPRESSION |
| 220 | 4-654-273-02 | s | ACE (M2), LOCK |
| 221 | 4-926-395-01 | s | SPRING,COMPRESSION(COIL) (ST) |
| | 7-682-247-04 | s | SCREW +K 3X6 |
| | 7-682-903-01 | s | SCREW +PWH 3X5 |
| | 7-685-533-14 | s | SCREW +BTP2.6X6 |




| No. | Part No. | SP | Description |
|---|---|---|---|
| 301 | ⚠ A-1124-076-A | s | MOUNTED CIRCUIT BOARD, CN-2604 |
| 302 | 1-562-222-21 | s | RECEPTACLE,CONNECTOR 6P |
| 303 | 1-563-929-11 | s | CONNECTOR,ROUND TYPE (RF) 4P |
| 304 | 1-565-443-11 | o | RECEPTACLE,CONNECTOR 10P |
| 305 | 1-757-430-11 | s | CABLE ASSEMBLY, COAXIAL |
| 306 | 1-766-696-11 | o | CONNECTOR, ROUND TYPE 8P |
| 307 | 1-784-240-11 | s | CONVERTER, COAXIAL CONNECTOR |
| 308 | 1-819-262-11 | s | CONNECTOR, ROUND TYPE 12P |
| 309 | 1-830-738-11 | s | CABLE ASSEMBLY, COAXIAL |
| 310 | 1-830-739-11 | s | CABLE ASSEMBLY, COAXIAL |
| 311 | 1-830-740-11 | s | CABLE ASSEMBLY, COAXIAL |
| 312 | 1-830-741-11 | s | CABLE ASSEMBLY, COAXIAL |
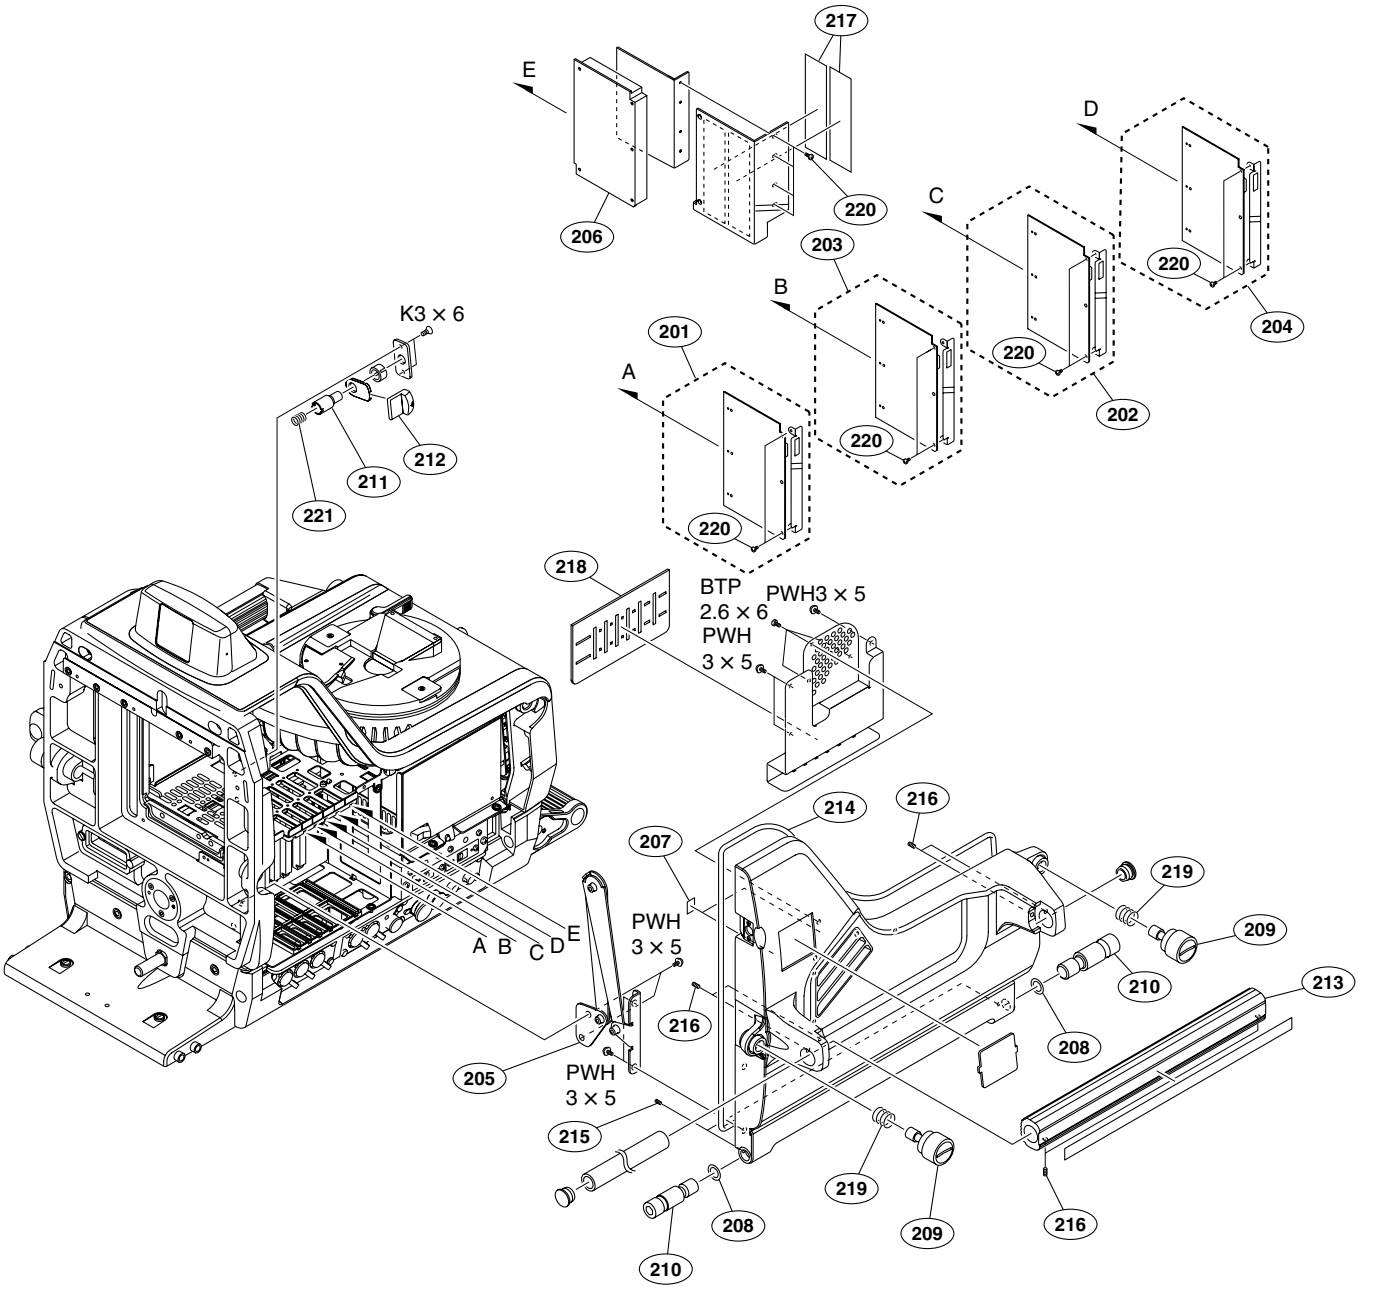
| No. | Part No. | SP | Description |
|---|---|---|---|
| 313 | 3-605-338-03 | s | CAP,CONNECTOR |
| 314 | 3-678-769-00 | s | CAP |
| 315 | 3-694-181-01 | s | AROCK PRECISION +P2.6X5 TYPE 1 |
| 316 | 3-719-159-01 | s | SCREW (M3), (+ BW) (STEEL) |
| 317 | 3-868-657-02 | s | CAP,BNC |
| 318 | 3-872-935-01 | s | CAP,BNC |
| 319 | 3-965-077-01 | s | SCREW, SPECIAL (M2) |
| 320 | 4-654-273-02 | s | ACE (M2), LOCK |
| | 7-623-923-01 | s | WASHER,POLYETHYLENE 2.6 |

# Left Side Panel (HDC1000/1100)

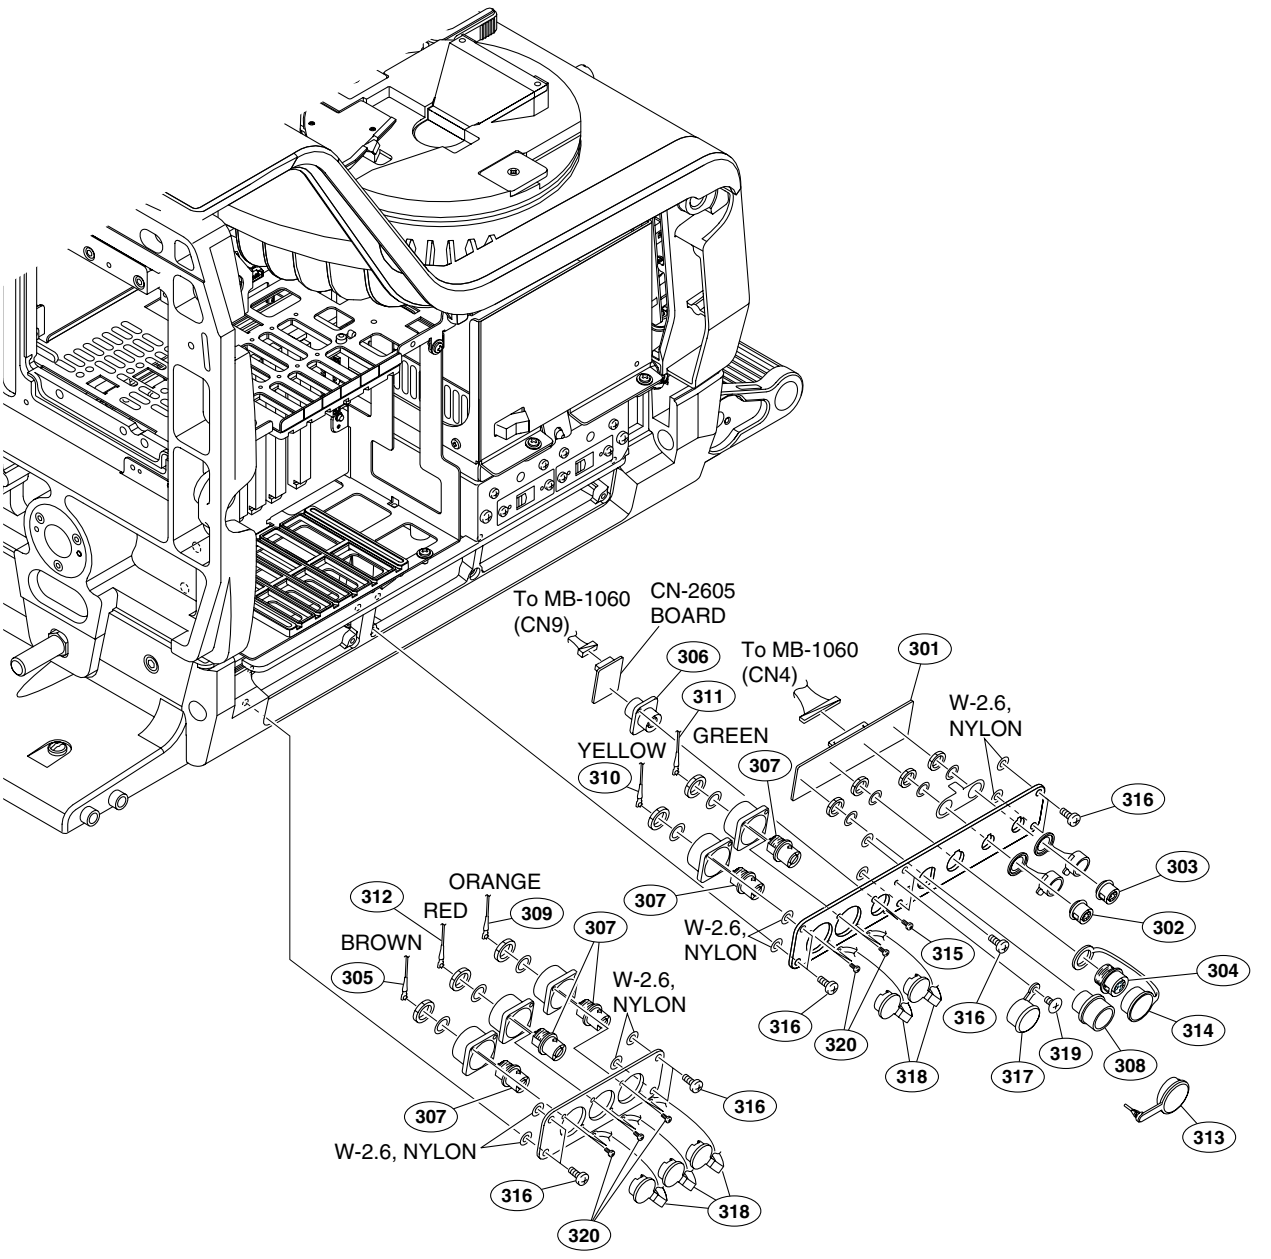


| No. | Part No. | SP | Description |
|---|---|---|---|
| 401 | X-3692-312-4 | o | STAY (LEFT) ASSY |
| 402 | X-3605-866-1 | o | STAY L ASSY(H1) |
| 403 | 2-280-511-12 | o | BRACKET,ADJUSTMENT ANGLE |
| 404 | 2-623-773-11 | s | BOLT (M3X8),STAINLESS |
| 405 | 3-185-871-02 | s | TAPE, DROP PROTECTION SHIELD |
| 406 | 3-185-878-01 | s | WASHER (PA) |
| 407 | 3-185-887-01 | o | SCREW, KNOB |
| 408 | 3-185-890-01 | s | BOLT, SHOULDER (SUS) |
| 409 | 3-185-905-02 | o | SOLENOID |
| 410 | 3-605-906-01 | o | CAP,LATCH (WHITE) |
| | 3-605-906-11 | s | CAP,LATCH (BLACK) |
| 411 | 3-612-402-02 | o | HANDLE COVER(C) (WHITE) |

| No. | Part No. | SP | Description |
|---|---|---|---|
| 412 | 3-615-750-62 | s | SHIELD CUSHION(C) |
| 413 | 3-701-505-00 | s | SET-SCREW,HEX 3X3 ST |
| 414 | 3-701-510-00 | s | SET-SCREW,HEXGON 4X4 (WP) ST |
| 415 | 4-367-209-00 | s | SPRING,COMPRESSION |
| 416 | 4-926-395-01 | s | SPRING,COMPRESSION(COIL) (ST) |
| | 7-682-247-04 | s | SCREW +K 3X6 |
| | 7-682-903-01 | s | SCREW +PWH 3X5 |
| | 7-685-533-14 | s | SCREW +BTP2.6X6 |




| No. | Part No. | SP | Description |
|---|---|---|---|
| 501 | ⚠ A-1099-252-B | s | MOUNTED CIRCUIT BOARD, SDI-84 |
| 502 | ⚠ A-1101-927-A | s | MOUNTED CIRCUIT BOARD, DPR-265 |
| 503 | ⚠ A-1124-078-A | s | MOUNTED CIRCUIT BOARD, CN-2606 |
| 504 | ⚠※ A-1166-187-A | s | MOUNTED CIRCUIT BOARD, MB-1060G (GOLD) |
| | ⚠※ A-1124-080-A | s | MOUNTED CIRCUIT BOARD, MB-1060 (SILVER) |
| 505 | 1-500-051-21 | s | BEAD, FERRITE (WITH CASE) |
| 506 | ※ 1-831-118-11 | s | CABLE, FLEXIBLE FLAT (30 CORE) (GOLD) |
| | ※ 1-757-644-11 | s | CABLE, FLEXIBLE FLAT (30 CORE) (SILVER) |
| 507 | 2-254-842-02 | s | COVER,SWITCH INSULATING |
| 508 | 3-165-162-01 | s | SCREW(+P2.6X5)(TYPE 1) (ST) |
| 509 | 3-186-500-02 | s | LID (N), OUTLET |
| 510 | 3-364-941-01 | s | SCREW (+B) (2.6X5),NYLOK |
| 511 | 3-694-825-11 | s | SCREW M3 STEP,SPECIAL HEAD ST |
| 512 | 3-719-159-01 | s | SCREW (M3), (+ BW) (STEEL) |
| 513 | 3-748-142-01 | s | COVER,CONNECTOR |
| 514 | 3-796-985-02 | s | CUSHION,DROP PROTECTION |
| 515 | 3-796-986-01 | s | KNOB,SLIDE SW |
| 516 | 4-654-273-02 | s | ACE (M2), LOCK |
| 517 | 1-819-791-11 | s | OUTLET, AC (3P) (HDC1000(UCJ,J)/1100(J)) |
| | 1-251-221-11 | s | OUTLET, AC (HDC1000(CE)) |
| | 7-621-772-40 | s | SCREW +B 2X8(EP-FE/ZNBK/CM2) |
| | 7-623-923-01 | s | WASHER,POLYETHYLENE 2.6 |
| | 7-682-549-04 | s | SCREW +B3X10(EP-FE/CU,NI,CR) |
| | 7-682-553-04 | s | SCREW +B3X20(EP-FE/CU,NI,CR) |
| | 7-682-947-01 | s | SCREW +PSW 3X6 |

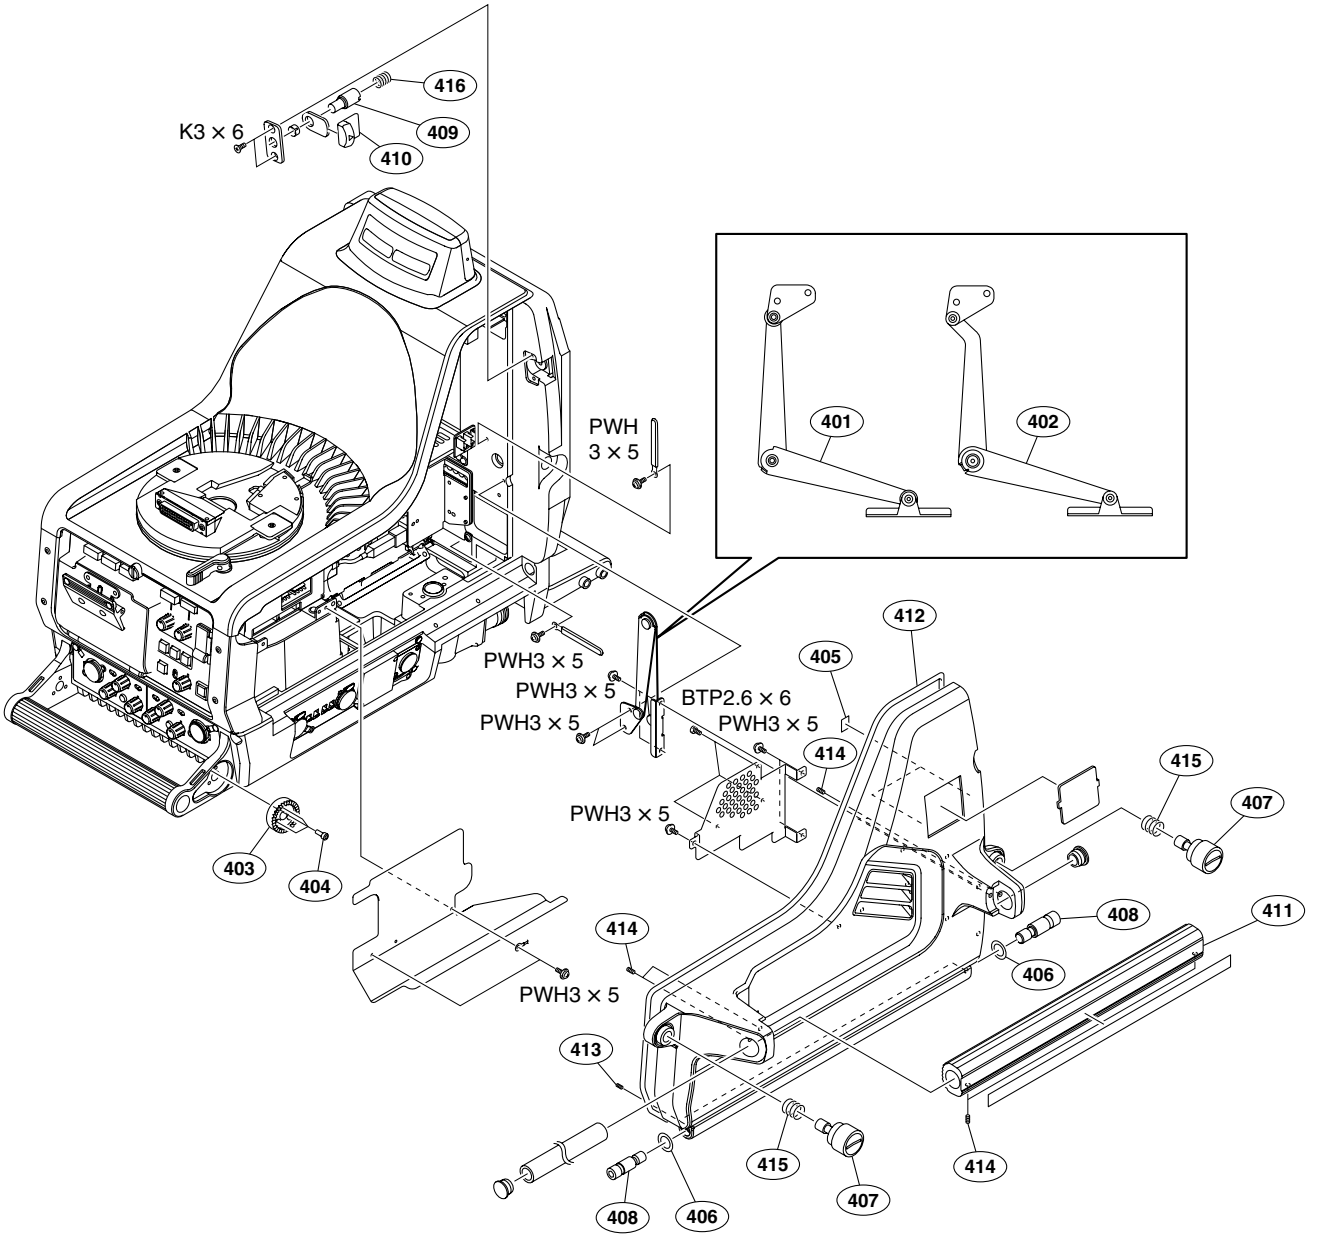※: メンテナンスマニュアルVolume 1の「1-6. 部品交換時の注意事項」を参照してください。
※: Refer to Section 1-6. “Notes for Replacing Parts” of the Maintenance Manual volume 1.

# Control Panel (HDC1000/1100)



| No. | Part No. | SP | Description |
|---|---|---|---|
| 601 | ⚠ A-1124-075-A | s | MOUNTED CIRCUIT BOARD, CN-2603 (HDC1000(UCJ,J)/1100(J)) |
| | ⚠ A-1177-500-A | s | MOUNTED CIRCUIT BOARD, CN-2603B (HDC1000(CE)) |
| 602 | ⚠* A-1159-990-A | s | MOUNTED CIRCUIT BOARD, AT-166G (GOLD) |
| | ⚠* A-1126-980-A | s | MOUNTED CIRCUIT BOARD, AT-166 (SILVER) |
| 603 | ⚠* A-1163-069-A | s | MOUNTED CIRCUIT BOARD, SW-1233G (GOLD) |
| | ⚠* A-1124-074-A | s | MOUNTED CIRCUIT BOARD, SW-1233 (SILVER) |
| 604 | X-3167-562-1 | o | PAPER ASSY (WHITE) |
| | X-3704-711-1 | s | PAPER HOLDER ASSY (BLACK) |
| 605 | X-3167-563-1 | s | KNOB (DIA.3) ASSY, VOLUME |
| 606 | X-3605-883-2 | s | SLOT,MEMORY STICK ASSY (ABS) (WHITE) |
| | X-3704-707-1 | s | SLOT,MEMORY STICK ASSY (BLACK) |
| 607 | * 1-831-132-11 | s | CABLE, FLEXIBLE FLAT (30 CORE) (GOLD) |
| | * 1-823-558-11 | s | CABLE, FLEXIBLE FLAT (30 CORE) (SILVER) |
| 608 | 3-165-162-01 | s | SCREW(+P2.6X5)(TYPE 1) (ST) |
| 609 | 3-185-867-01 | o | CATCHER, MAGNET (FERRITE) |
| 610 | 3-185-875-01 | o | HINGE, REAR (WHITE) |
| | 3-185-875-11 | s | HINGE, REAR (BLACK) |
| 611 | 3-565-714-00 | o | SHAFT,CHASSIS |
| 612 | 3-602-483-01 | s | KNOB,VOLUME 6 |
| 613 | 3-615-750-62 | s | SHIELD CUSHION(C) |
| 614 | 3-627-299-01 | o | CAP,MEMORY STICK (WHITE) |
| 615 | 3-627-700-03 | o | SLOT,MEMORY STICK (WHITE) |
| 616 | 3-627-701-01 | o | EJECTOR,MEMORY STICK |
| 617 | 3-627-703-03 | o | LEAF SPRING |
| 618 | 3-644-002-00 | o | CUSHION,HANDLE (RBR) |
| 619 | 3-673-018-00 | s | SCREW,BLIND (PLA) (WHITE) |
| | 3-673-018-11 | s | SCREW, BLIND (PLA) (BLACK) |
| 620 | 3-692-320-01 | o | BUTTON |
| 621 | 3-692-321-01 | o | BUTTON |
| 622 | 3-692-322-01 | o | BUTTON |
| 623 | 3-692-324-01 | o | BUTTON |
| 624 | 3-692-325-01 | o | BUTTON |
| 625 | 3-694-181-01 | s | AROCK PRECISION +P2.6X5 TYPE 1 |
| 626 | 3-701-441-11 | s | WASHER PLASTIC (4.1X0.25) |
| 627 | 3-719-159-01 | s | SCREW (M3), (+ BW) (STEEL) |
| 628 | 3-748-142-01 | s | COVER,CONNECTOR |
| 629 | 3-872-577-01 | s | KNOB,VOLUME DIA.6 |
| 630 | 3-872-699-01 | s | VR SLEEVE |
| 631 | 3-872-713-01 | s | CUSHION,DROP PROTECT REAR |
| 632 | 3-872-714-01 | s | CUSHION,DROP PROTECT INCOM |
| | 7-623-923-01 | s | WASHER,POLYETHYLENE 2.6 |
| | 7-682-251-04 | s | SCREW +K 3X14 |
| | 7-682-548-04 | s | SCREW +B3X8 |
| | 7-682-903-01 | s | SCREW +PWH 3X5 |
| | 7-685-534-14 | s | SCREW +BTP2.6X8 (SILVER) |
| | 7-685-534-19 | s | SCREW +BTP2.6X8(EP-FE/ZNBK/CM2) (BLACK) |
| | 7-688-003-13 | s | WASHER W3 MIDDLE |

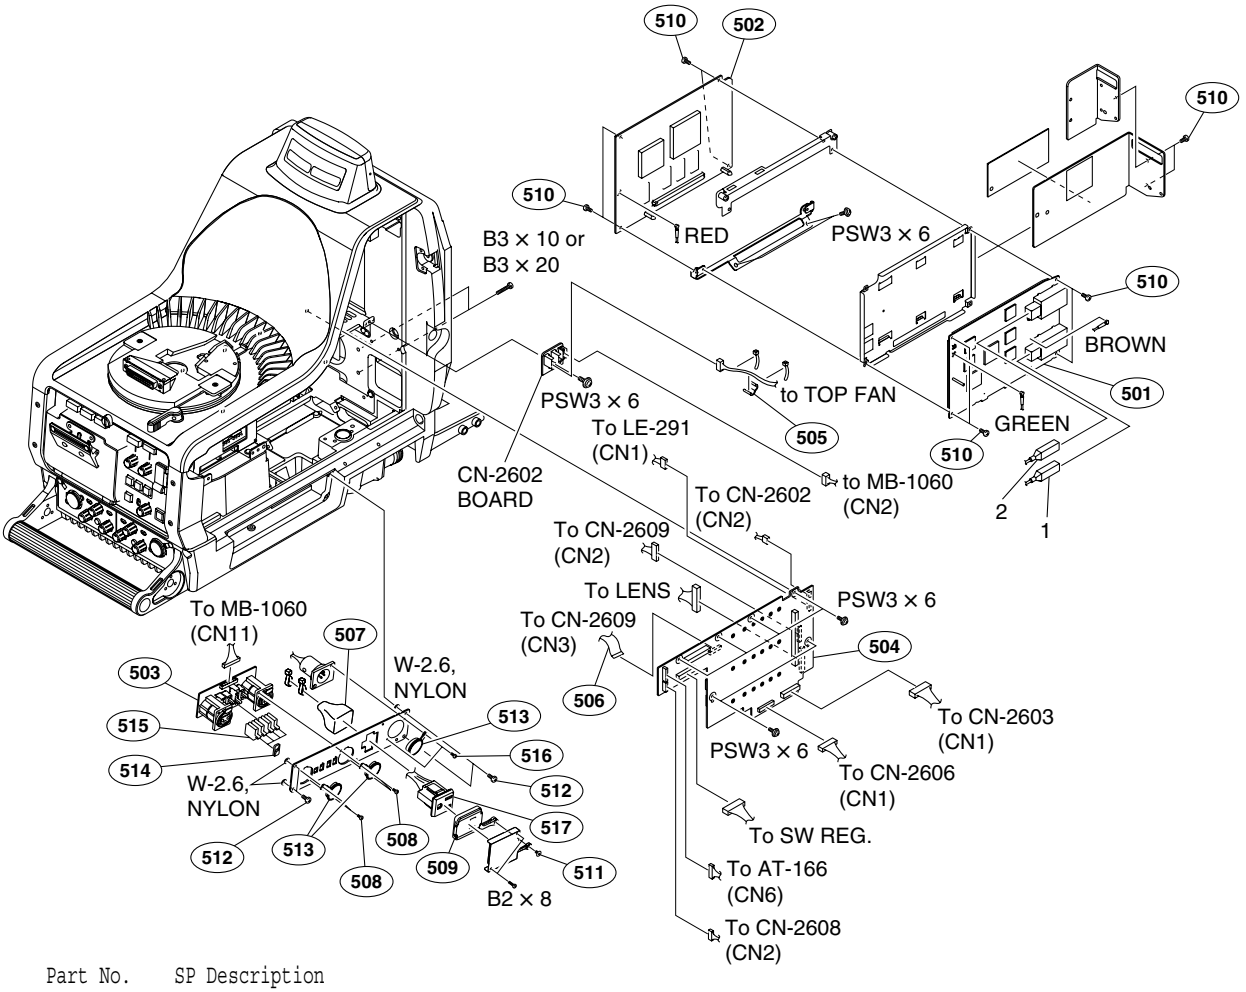*: メンテナンスマニュアルVolume 1の「1−6. 部品交換時の注意事項」を参照してください。
*: Refer to Section 1-6. “Notes for Replacing Parts” of the Maintenance Manual volume 1.

# Top Chassis (HDC1000/1100)



| No. | Part No. | SP | Description |
|---|---|---|---|
| 701 | ⚠ A-1126-981-A | s | MOUNTED CIRCUIT BOARD, LE-291 |
| 702 | ⚠ A-1126-982-A | s | MOUNTED CIRCUIT BOARD, LE-309 |
| 703 | A-8314-047-A | o | PANNING ASSY |
| 704 | X-3167-699-2 | o | GUARD ASSY, HARNESS |
| 705 | 1-787-497-11 | s | FAN, DC (SQUARE 60) |
| 706 | 2-391-520-21 | s | BOLT (M5X12),HOLE, HEXAGON(ST) |
| 707 | 3-165-162-01 | s | SCREW(+P2.6X5)(TYPE 1) (ST) |
| 708 | 3-185-881-02 | o | PLATE, LOCK PAN |
| 709 | 3-185-885-01 | o | SCREW, PAN FRICTION |
| 710 | 3-185-886-04 | s | LEVER, PAN LOCK |
| 711 | 3-186-806-01 | s | SCREW, LID |
| 712 | 3-613-969-02 | o | SPRING,EMC |
| 713 | 3-627-249-02 | o | BRACKET,FAN(1) |
| 714 | 3-627-250-03 | s | BRACKET,FAN(2) |
| 715 | 3-627-260-01 | o | PACKING,FAN |
| 716 | 3-634-355-00 | s | SPRING,COMPRESSION (STEEL) |
| 717 | 3-641-622-00 | s | SPRING (STEEL) |
| 718 | 3-692-332-01 | o | PLATE (A) |
| 719 | 3-701-444-11 | s | WASHER PLASTIC (6.2X9.5X0.25) |
| 720 | 3-701-510-00 | s | SET-SCREW,HEXGON 4X4 (WP) ST |
| 721 | 3-703-150-11 | o | CLAMP |
| 722 | 3-719-381-01 | s | SCREW +P M2X4 (ZNBK)(LOCK ) |
| 723 | 3-872-517-01 | s | LED MATRIX MASK |
| 724 | 3-872-521-01 | s | UP TALLY COVER |
| 725 | 4-654-273-02 | s | ACE (M2), LOCK |
| | 7-623-923-01 | s | WASHER,POLYETHYLENE 2.6 |
| | 7-623-928-01 | s | WASHER PLASTIC (8X0.5) |
| | 7-623-928-11 | s | WASHER 8.0, NYLON |
| | 7-624-106-04 | s | STOP RING, TYPE-E3(CZN-N4) |
| | 7-624-209-00 | s | RING,O P-5 |
| | 7-671-115-01 | s | BALL,STEEL(5MM) |
| | 7-682-247-04 | s | SCREW +K 3X6 |
| | 7-682-548-04 | s | SCREW +B3X8 |
| | 7-682-903-01 | s | SCREW +PWH 3X5 |
| | 7-682-961-01 | s | SCREW +PSW 4X8 |
| | 7-688-004-11 | o | WASHER W4, MIDDLE |

# Chassis Block (HDC1000/1100)

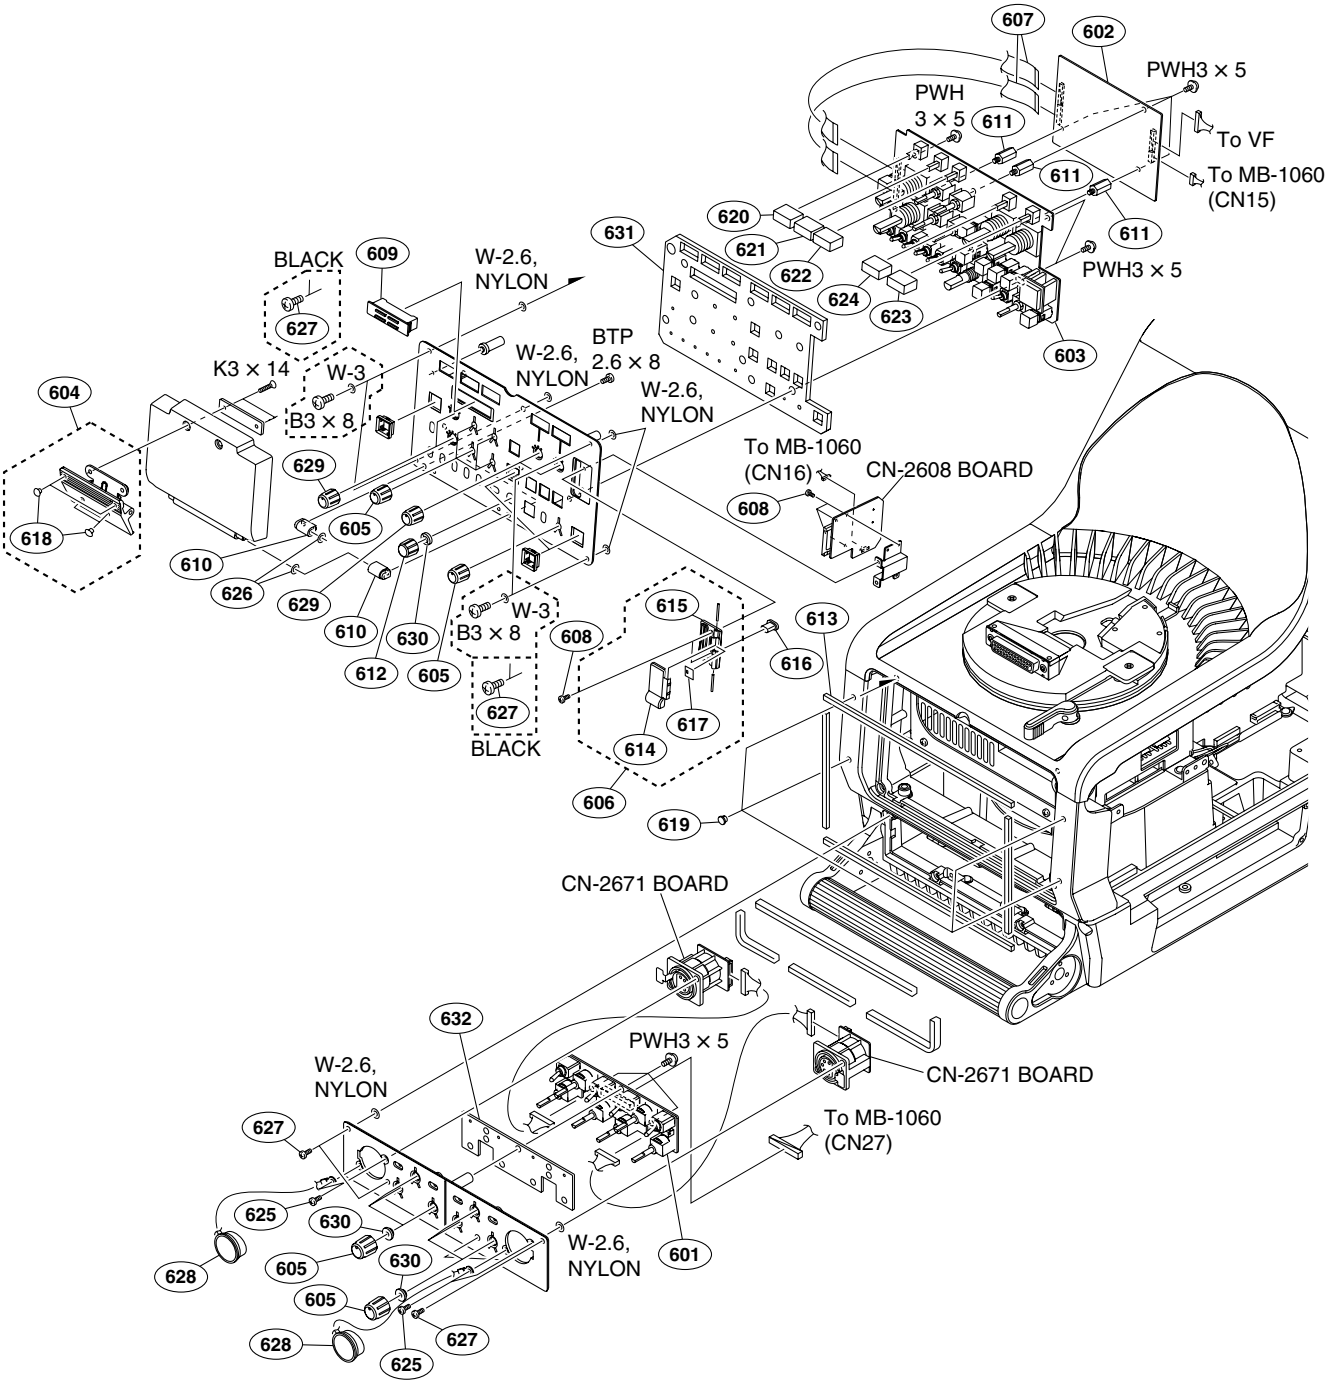

| No. | Part No. | SP | Description |
|---|---|---|---|
| 801 | ⚠※ A-1166-186-A | s | MOUNTED CIRCUIT BOARD, CN-2609G (GOLD) |
| | ⚠※ A-1123-671-A | s | MOUNTED CIRCUIT BOARD, CN-2609 (SILVER) |
| 802 | A-8273-198-B | o | CONNECTOR ASSY, OPT |
| 803 | ⚠ 1-443-820-11 | s | TRANSFORMER, POWER |
| 804 | ⚠ 1-468-861-13 | s | REGULATOR, SWITCHING |
| 805 | ⚠ 1-533-514-31 | s | BREAKER, CIRCUIT (for HDC1000(UCJ,J)/1100(J)) |
| | ⚠ 1-533-514-61 | s | BREAKER, CIRCUIT (for HDC1000(CE)) |
| 806 | ⚠ 1-533-515-31 | s | BREAKER, CIRCUIT (for HDC1000(UCJ,J)/1100(J)) |
| | ⚠ 1-533-515-61 | s | BREAKER, CIRCUIT (for HDC1000(CE)) |
| 807 | ⚠ 1-570-173-11 | s | SWITCH,VOLTAGE CHANGE |
| 808 | 1-830-746-11 | s | CABLE ASSEMBLY, ENCAPSULAT (M) (Made by LEMO) |
| | 1-830-750-11 | s | OPTICAL MULTI CABLE ASSEMBLY (Made by TAJIMI) |
| 809 | 3-176-525-01 | o | WASHER, SPRING (ST) |
| 810 | 3-364-941-01 | s | SCREW (+B) (2.6X5),NYLOK |
| 811 | 3-602-404-02 | s | HOUSING, CONECTOR |
| 812 | 3-602-460-03 | o | SHAFT, CONNECTOR |
| 813 | 3-602-461-01 | o | NUT, CONNECTOR |
| 814 | 3-602-464-01 | o | WASHER, CONDUCTIVE |
| 815 | 3-602-491-01 | o | PLATE,FIBER |
| 816 | 3-725-907-01 | s | BUSHING,BLIND |
| 817 | 4-644-493-11 | s | SCREW(M2.6X4), LOCK ACE |
| | 7-623-923-01 | s | WASHER,POLYETHYLENE 2.6 |
| | 7-627-556-77 | s | SCREW,PRECISION +P2.6X6 TYPE 1 |
| | 7-682-248-04 | s | SCREW +K 3X8 |
| | 7-682-548-04 | s | SCREW +B3X8 |
| | 7-682-549-09 | s | SCREW +B 3X10 |
| | 7-682-903-01 | s | SCREW +PWH 3X5 |
| | 7-682-947-01 | s | SCREW +PSW 3X6 |
| | 7-682-961-01 | s | SCREW +PSW 4X8 |
| | 7-685-534-14 | s | SCREW +BTP2.6X8 |

※: メンテナンスマニュアルVolume 1の「1−6. 部品交換時の注意事項」を参照してください。
※: Refer to Section 1-6. “Notes for Replacing Parts” of the Maintenance Manual volume 1.

## 1-2-2. HDC1400/1450/1500/1550/1580/1600

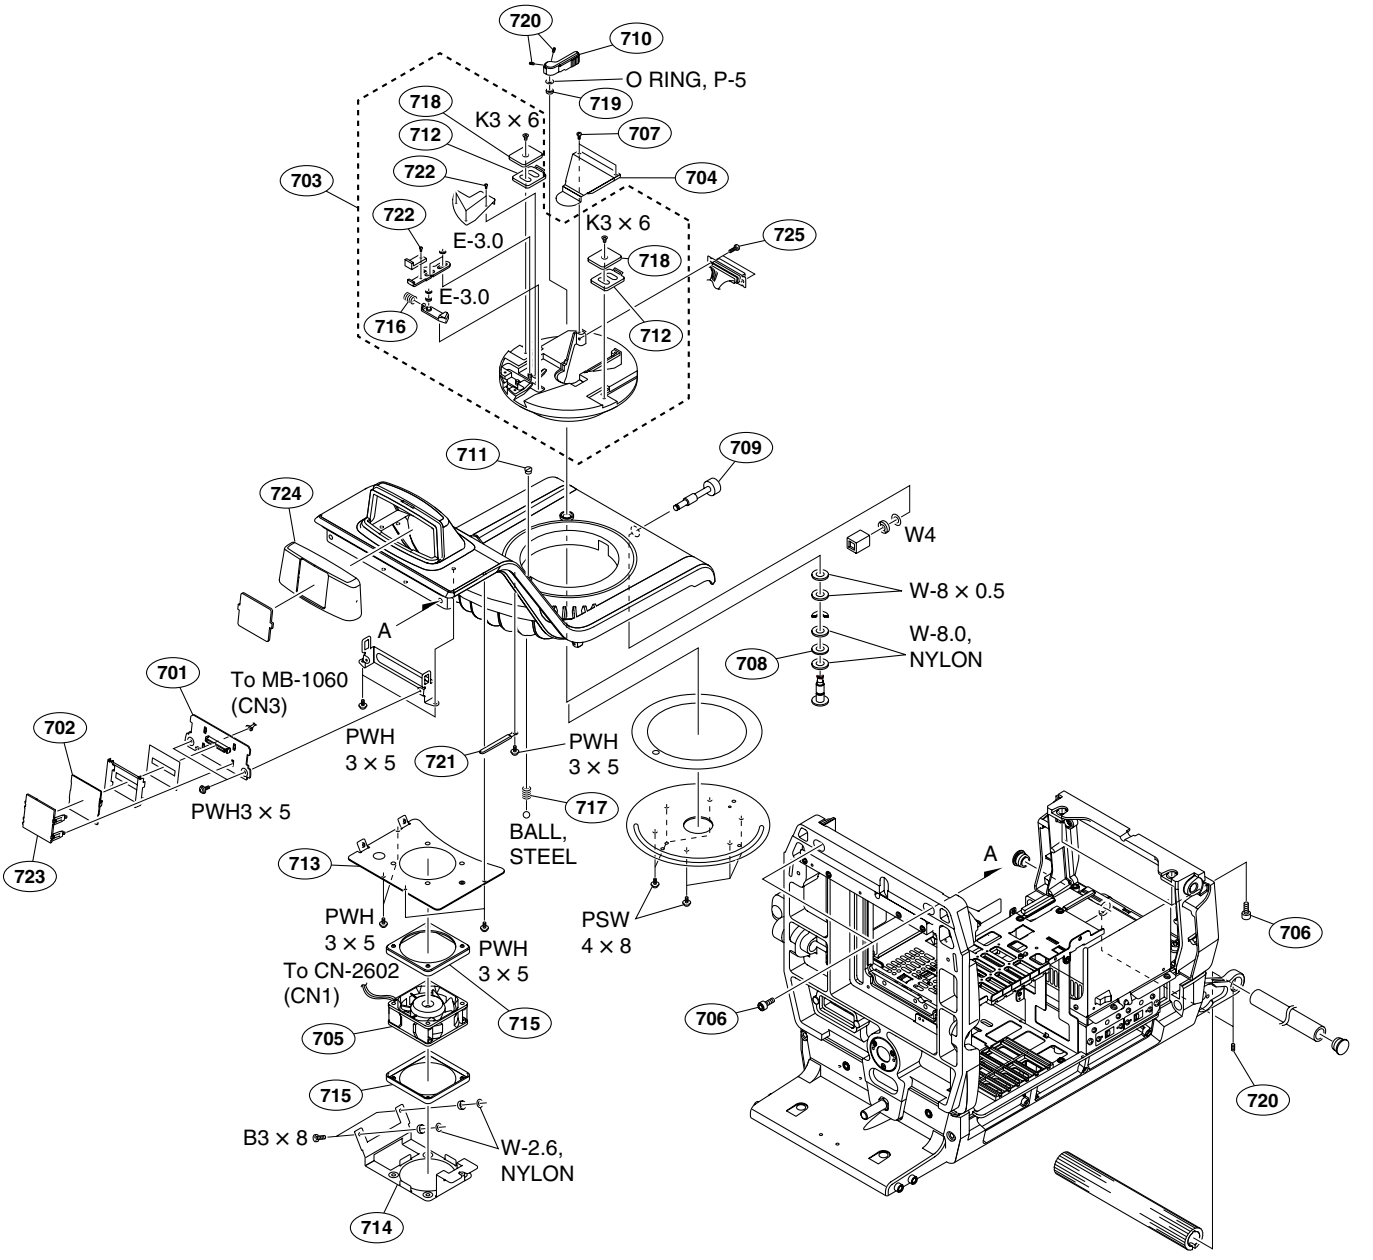


| No. | Part No. | SP | Description |
|---|---|---|---|
| 901 | ⚠ A-1099-128-A | s | MOUNTED CIRCUIT BOARD, SW-1240 |
| 902 | A-1128-451-A | s | INSIDE SWITCHCOVER ASSY |
| 903 | A-1128-452-A | s | MS COVER ASSY |
| 904 | 1-963-916-11 | s | HARNESS, SUB (INSIDE SW) |
| 905 | 3-364-941-11 | s | SCREW (+B 2.6X5),NYLOK (STEEL) |
| 906 | 3-603-680-02 | s | STAINLESS SCREW +B3X12 |
| 907 | 3-612-669-01 | o | LID,POWER SW |
| 908 | 3-672-250-01 | s | RING(M2.6),O (RBR) |
| 909 | 3-703-575-11 | s | PIN PARALLEL (1.2X8) |
| 910 | 3-742-066-11 | s | SPRING, SHUTTER |
| 911 | 3-857-347-01 | s | CALL COVER |
| 912 | 3-872-587-01 | s | CUSHION,TOGGLE-SW |
| 913 | 3-872-610-01 | s | PAD |
| | 7-685-103-19 | s | SCREW +PTP 2X5 |
| | 7-685-133-19 | s | SCREW +PTP2.6X6(EP-FE/ZNBK) |

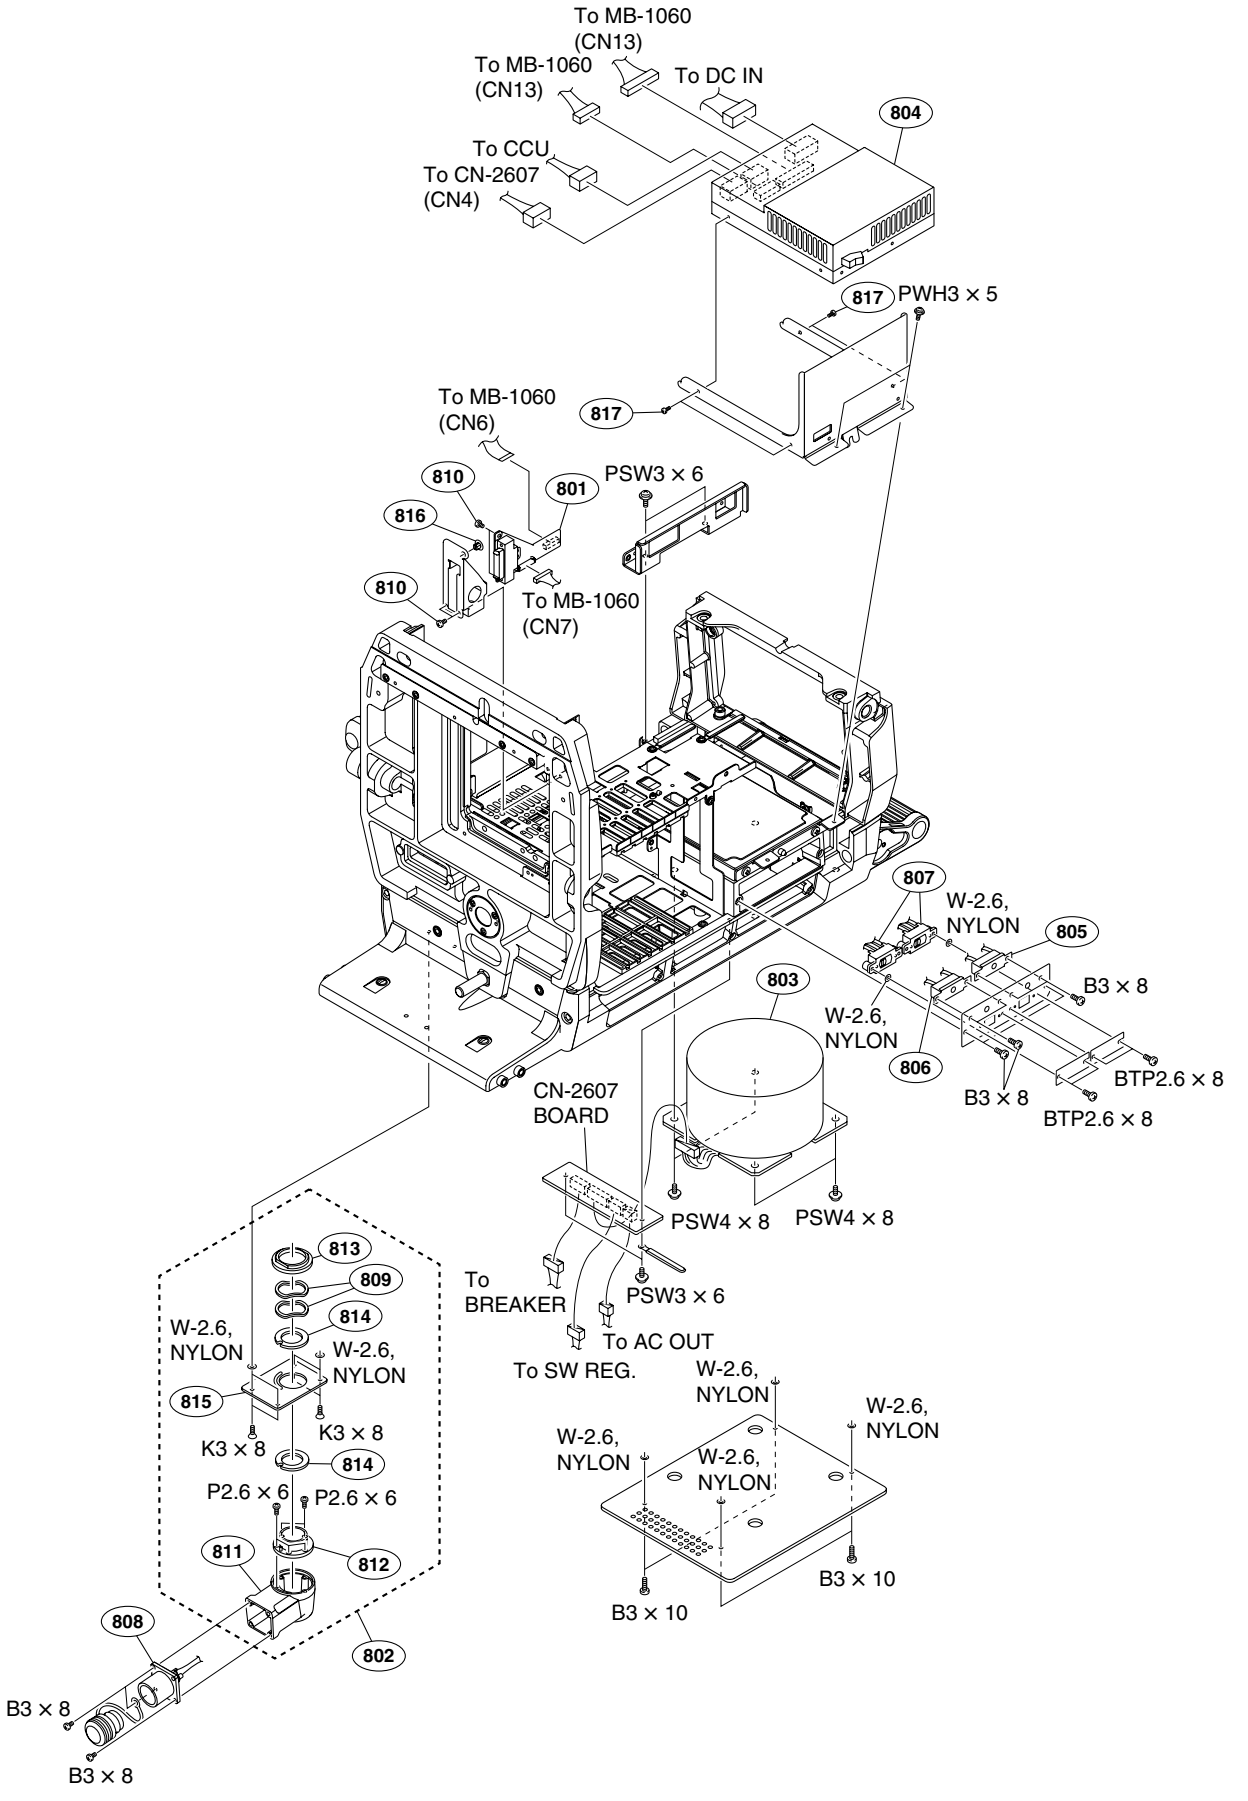


| No. | Part No. | SP | Description |
|---|---|---|---|
| 1001 | ⚠ A-1099-252-B | s | MOUNTED CIRCUIT BOARD, SDI-84 (HDC1500/1600) |
| | ⚠ A-1179-311-B | s | MOUNTED CIRCUIT BOARD, SDI-84C (HDC1400/1580) |
| 1002 | A-1128-449-A | s | OUTSIDE PAD SUBASSY |
| 1003 | 1-784-240-11 | s | CONVERTER, COAXIAL CONNECTOR (HDC1500/1600) |
| 1004 | 1-829-055-11 | s | CABLE ASSEMBLY, COAXIAL (HDC1500/1600) |
| 1005 | 1-830-737-11 | s | CABLE ASSEMBLY, COAXIAL (HDC1500/1600) |
| 1006 | ⚠ 1-830-745-11 | s | CABLE ASSEMBLY, ENCAPSULAT (M) (Made by LEMO) |
| | ⚠ 1-830-751-11 | s | OPTICAL MULTI CABLE ASSEMBLY (Made by TAJIMI) |
| 1007 | 3-176-525-01 | o | WASHER, SPRING (ST) |
| 1008 | 3-364-941-01 | s | SCREW (+B) (2.6X5),NYLOK |
| 1009 | 3-602-461-01 | o | NUT, CONNECTOR |
| 1010 | 3-602-464-01 | o | WASHER, CONDUCTIVE |
| 1011 | 3-603-680-01 | s | STAINLESS SCREW +B3X12 |
| 1012 | 3-672-250-00 | s | RING(M2.6),O (RBR) |
| 1013 | 3-676-244-21 | s | COVER,SWITCH |
| 1014 | 3-701-822-00 | s | HOLDER, WIRE |
| 1015 | 3-872-605-02 | s | SHEET,DPR THERMAL |
| 1016 | 3-872-608-02 | s | LABEL(BNC) |
| 1017 | 3-872-935-01 | s | CAP,BNC (HDC1500/1600) |
| 1018 | 4-654-273-02 | s | ACE (M2), LOCK |
| 1019 | 3-872-571-01 | s | SHEET(1),SDI THERMAL |
| | 7-682-548-09 | s | SCREW +B 3X8 |

## Outside Panel (HDC1450/1550)

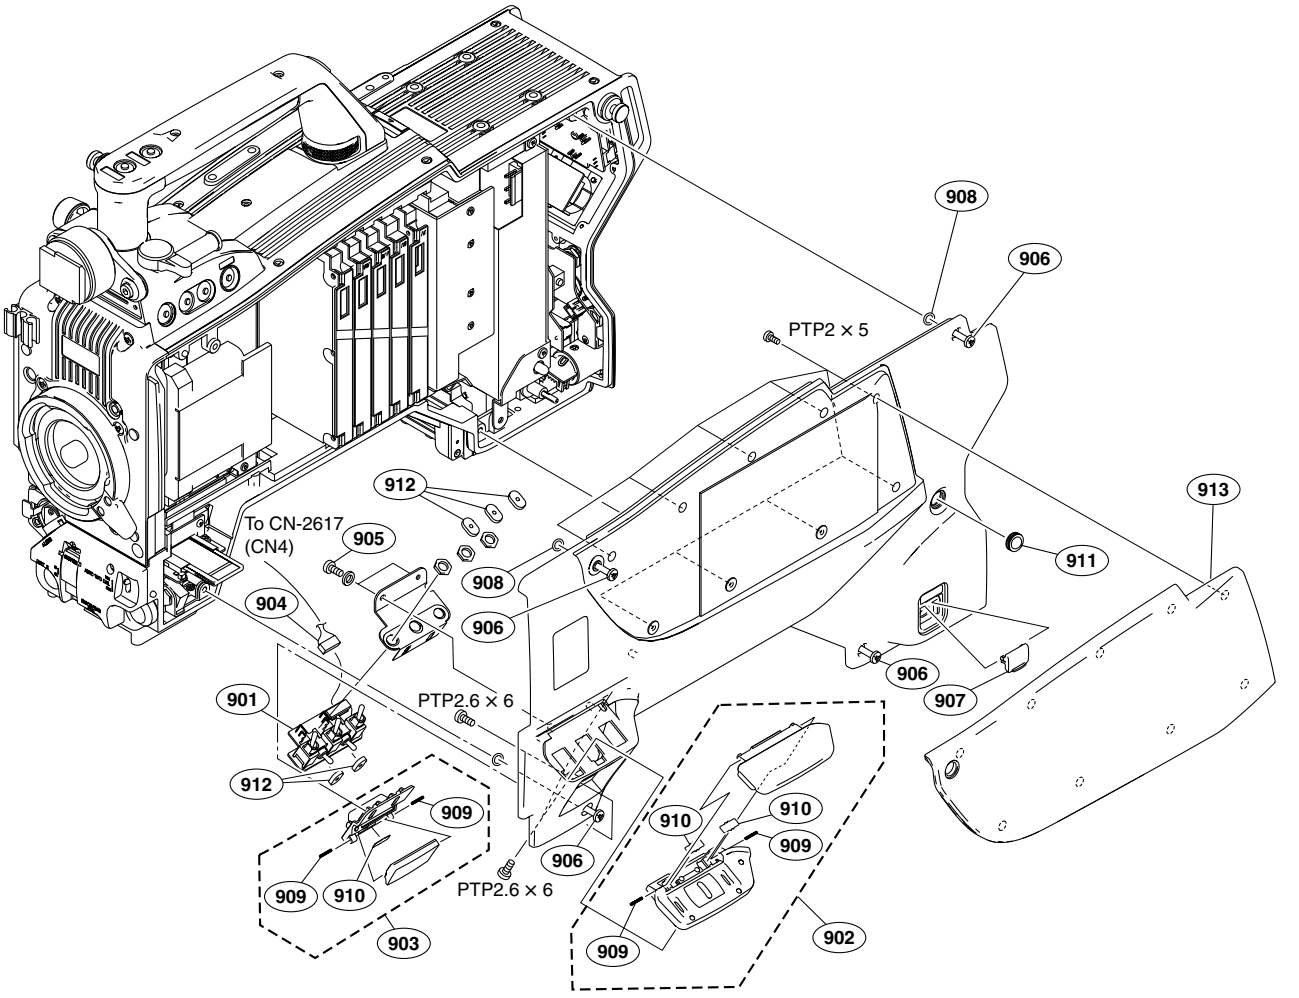


| No. | Part No. | SP | Description |
|---|---|---|---|
| 1051 | ⚠ A-1142-713-A | s | MOUNTED CIRCUIT BOARD, FL-337 |
| 1052 | ⚠ A-1142-714-B | s | MOUNTED CIRCUIT BOARD, MX-109 |
| 1053 | ⚠ A-1142-715-A | s | MOUNTED CIRCUIT BOARD, TR-136 |
| 1054 | A-1154-374-A | s | OUT SIDE PAD SUB ASSY |
| 1055 | ⚠ A-1154-376-A | s | TRIAX(UC)ASSY (HDC1450(UC)/1550(UC)) |
| | ⚠ A-1154-609-A | s | TRIAX(CE)ASSY (HDC1450(CE)/1550(CE)) |
| 1056 | 1-830-709-11 | s | CABLE, CONNECTOR WITH COAXIAL |
| 1057 | 1-831-010-11 | s | CABLE, FLEXIBLE FLAT (16 CORE) |
| 1058 | 3-176-525-01 | o | WASHER, SPRING (ST) |
| 1059 | 3-257-200-01 | s | CLAMP, CORD |
| 1060 | 3-364-941-01 | s | SCREW (+B) (2.6X5),NYLOK |
| 1061 | 3-602-461-01 | o | NUT, CONNECTOR |
| 1062 | 3-602-464-01 | o | WASHER, CONDUCTIVE |
| 1063 | 3-603-680-02 | s | STAINLESS SCREW +B3X12 |
| 1064 | 3-672-250-01 | s | RING (M2.6), O |
| 1065 | 3-673-910-02 | s | SCREW, CONNECTOR |
| 1066 | 3-676-244-21 | s | COVER,SWITCH |
| 1067 | 3-872-605-02 | s | SHEET,DPR THERMAL |
| 1068 | 3-872-608-02 | s | LABEL(BNC) |
| 1069 | 3-990-318-01 | s | BOX,TRIAX |
| 1070 | 3-872-571-01 | s | SHEET(1),SDI THERMAL |
| 1071 | 3-990-317-02 | s | SHEET,AUDIO THERMAL |
| 1072 | 3-990-320-01 | s | SHEET,TR THERMAL |
| 1073 | 3-990-321-02 | s | SHEET,MX THERMAL |
| 1074 | 3-990-332-02 | s | HINGE,MX |
| | 7-621-759-45 | s | SCREW +PSW, 2.6X6 |
| | 7-621-775-40 | s | SCREW +B 2.6X8 |
| | 7-627-556-98 | s | SCREW,PRECISION +P 2.6X8 TYPE1 |
| | 7-682-548-04 | s | SCREW +B 3X8 |
| | 7-682-903-11 | s | SCREW +PWH 3X6 |

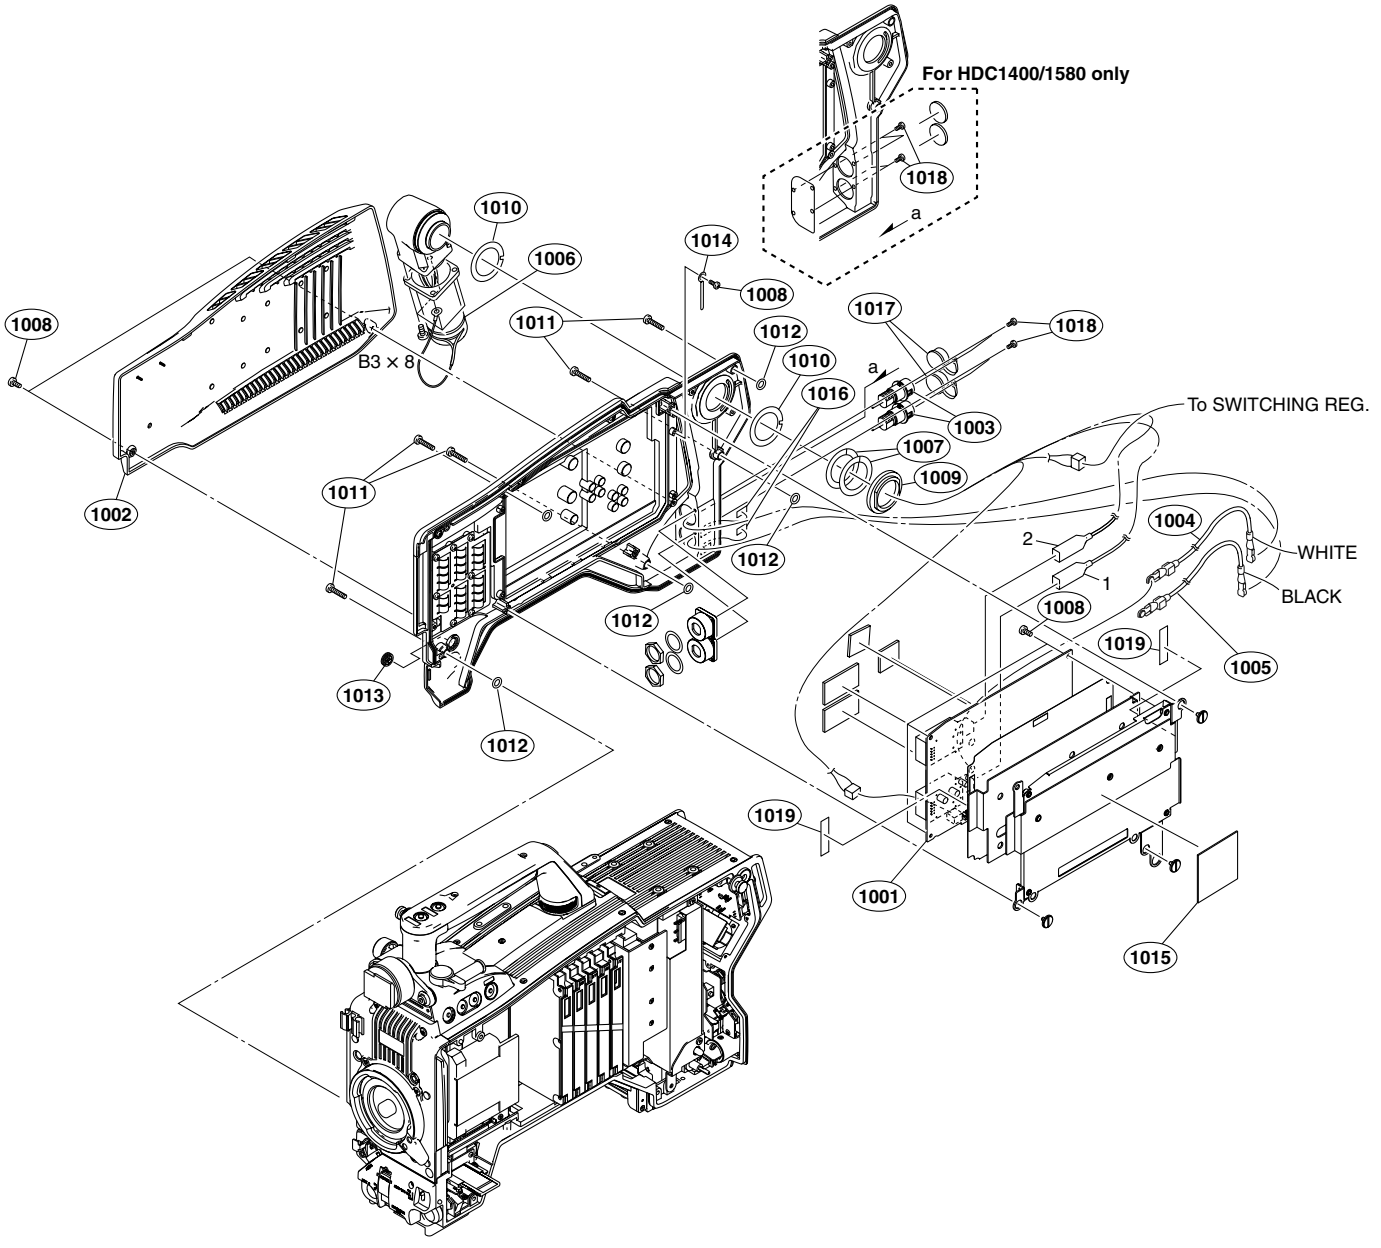


| No. | Part No. | SP | Description |
|---|---|---|---|
| 1101 | ⚠ A-1101-923-A | s | MOUNTED CIRCUIT BOARD, VDA-63 |
| 1102 | ⚠ A-1101-924-A | s | MOUNTED CIRCUIT BOARD, AU-298 |
| 1103 | ⚠ A-1101-925-A | s | MOUNTED CIRCUIT BOARD, DAP-33 |
| 1104 | ⚠ A-1101-926-A | s | MOUNTED CIRCUIT BOARD, AT-163 |
| 1105 | A-8286-163-A | s | PAD ASSY,SHOULDER |
| 1106 | ⚠ 1-468-862-11 | s | REGULATOR, SWITCHING |
| 1107 | ⚠ 1-478-790-11 | s | CONVERTER UNIT, DC-DC |
| 1108 | 3-364-941-01 | s | SCREW (+B) (2.6X5),NYLOK |
| 1109 | 3-872-590-01 | s | PORONSHEET(POWER) |
| 1110 | 3-872-620-01 | s | THERMATTACH TAPE(DD) |
| 1111 | 3-872-621-01 | s | THERMATTACH TAPE(AC/DC) |
| 1112 | 4-654-273-02 | s | ACE (M2), LOCK |
| 1113 | 3-986-535-03 | s | BAND,HANGING(REAR) |
| 1114 | 3-986-640-01 | s | SHEET,HEAT TRANS(DENGEN UPPER) |
| 1115 | 3-986-641-01 | s | SHEET,HEAT TRANS(DENGEN LOWER) |

# Board Block (HDC1450/1550)

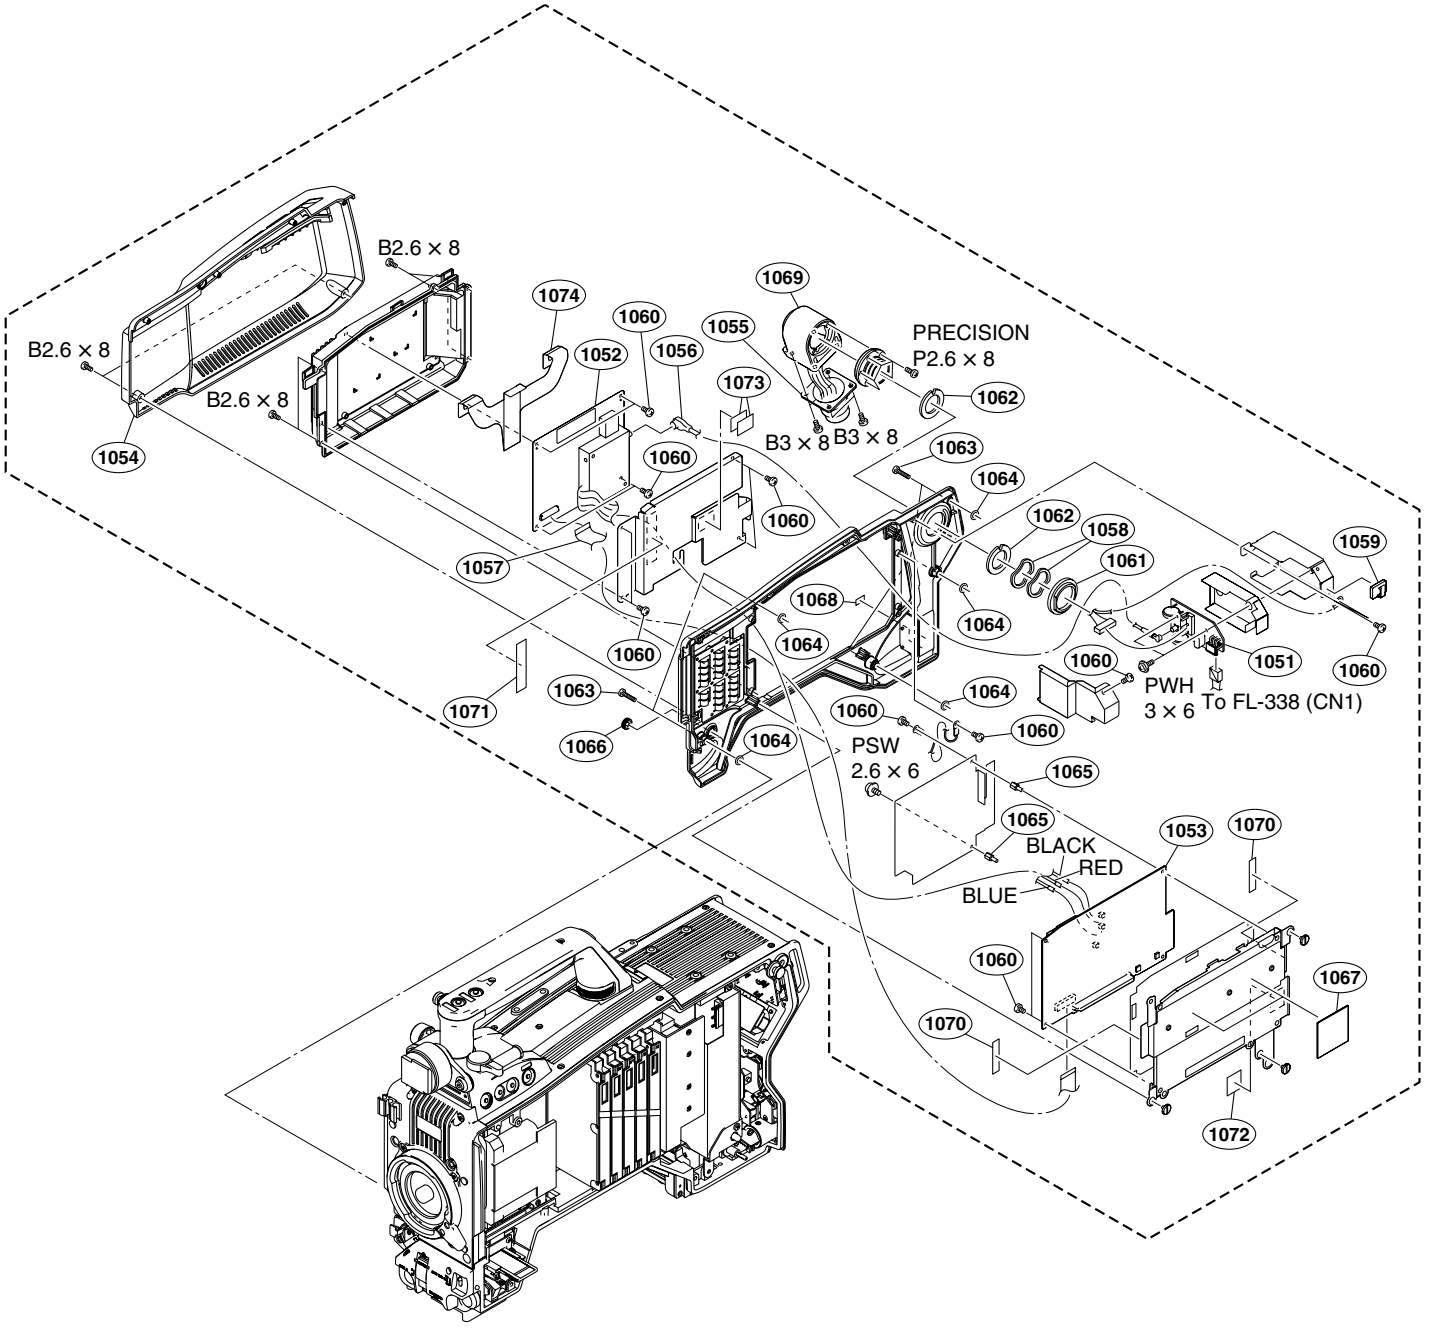


| No. | Part No. | SP | Description |
|---|---|---|---|
| 1151 | ⚠ A-1101-923-A | s | MOUNTED CIRCUIT BOARD, VDA-63 |
| 1152 | ⚠ A-1101-924-A | s | MOUNTED CIRCUIT BOARD, AU-298 |
| 1153 | ⚠ A-1101-925-A | s | MOUNTED CIRCUIT BOARD, DAP-33 |
| 1154 | ⚠ A-1101-926-A | s | MOUNTED CIRCUIT BOARD, AT-163 |
| 1155 | ⚠ A-1144-417-A | s | MOUNTED CIRCUIT BOARD, FL-338 |
| 1156 | A-8286-163-A | s | PAD ASSY,SHOULDER |
| 1157 | ⚠ 1-468-862-11 | s | REGULATOR, SWITCHING |
| 1158 | ⚠ 1-478-790-11 | s | CONVERTER UNIT, DC-DC |
| 1159 | 3-364-941-01 | s | SCREW (+B) (2.6X5),NYLOK |
| 1160 | 3-872-590-01 | s | PORONSHEET(POWER) |
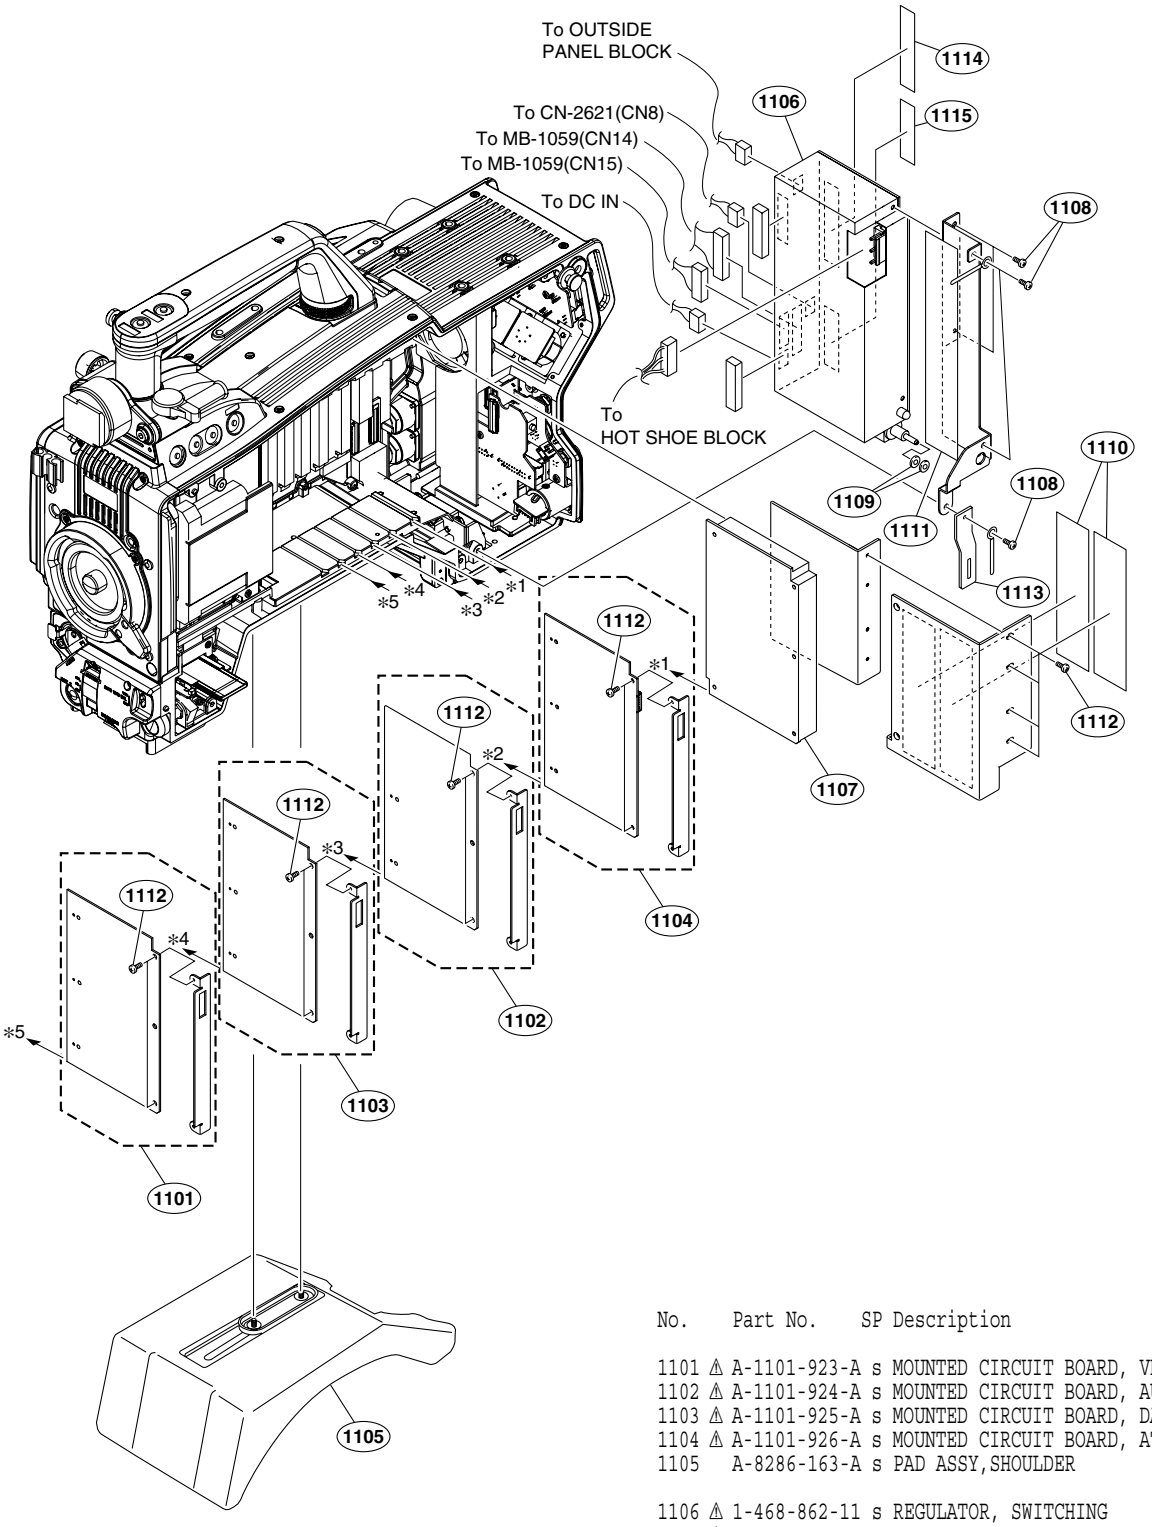
| No. | Part No. | SP | Description |
|---|---|---|---|
| 1161 | 3-872-620-01 | s | THERMATTACH TAPE(DD) |
| 1162 | 3-872-621-01 | s | THERMATTACH TAPE(AC/DC) |
| 1163 | 4-654-273-02 | s | ACE (M2), LOCK |
| 1164 | 3-986-535-03 | s | BAND,HANGING(REAR) |
| 1165 | 3-986-640-01 | s | SHEET,HEAT TRANS(DENGEN UPPER) |
| 1166 | 3-986-641-01 | s | SHEET,HEAT TRANS(DENGEN LOWER) |
| 1167 | 3-990-319-01 | s | SHEET,PROTECTION |
| | 7-621-759-65 | s | +PSW, 2.6X8 |
| | 7-682-903-11 | s | SCREW +PWH 3X6 |




| No. | Part No. | SP | Description |
|---|---|---|---|
| 1201 | ⚠ A-1101-927-A | s | MOUNTED CIRCUIT BOARD, DPR-265 (HDC1400/1500/1600) |
| | ⚠ A-1179-310-A | s | MOUNTED CIRCUIT BOARD, DPR-265C (HDC1580) |
| 1202 | ⚠※ A-1159-988-A | s | MOUNTED CIRCUIT BOARD, MB-1059G (GOLD) (HDC1500/1580/1600)*a |
| | ⚠※ A-1101-928-A | s | MOUNTED CIRCUIT BOARD, MB-1059 (SILVER) (HDC1500/1600)*a |
| | ⚠ A-1251-714-A | s | MOUNTED CIRCUIT BOARD, MB-1059GA (HDC1400/1500/1580/1600)*b |
| 1203 | 3-364-941-01 | s | SCREW (+B) (2.6X5),NYLOK |

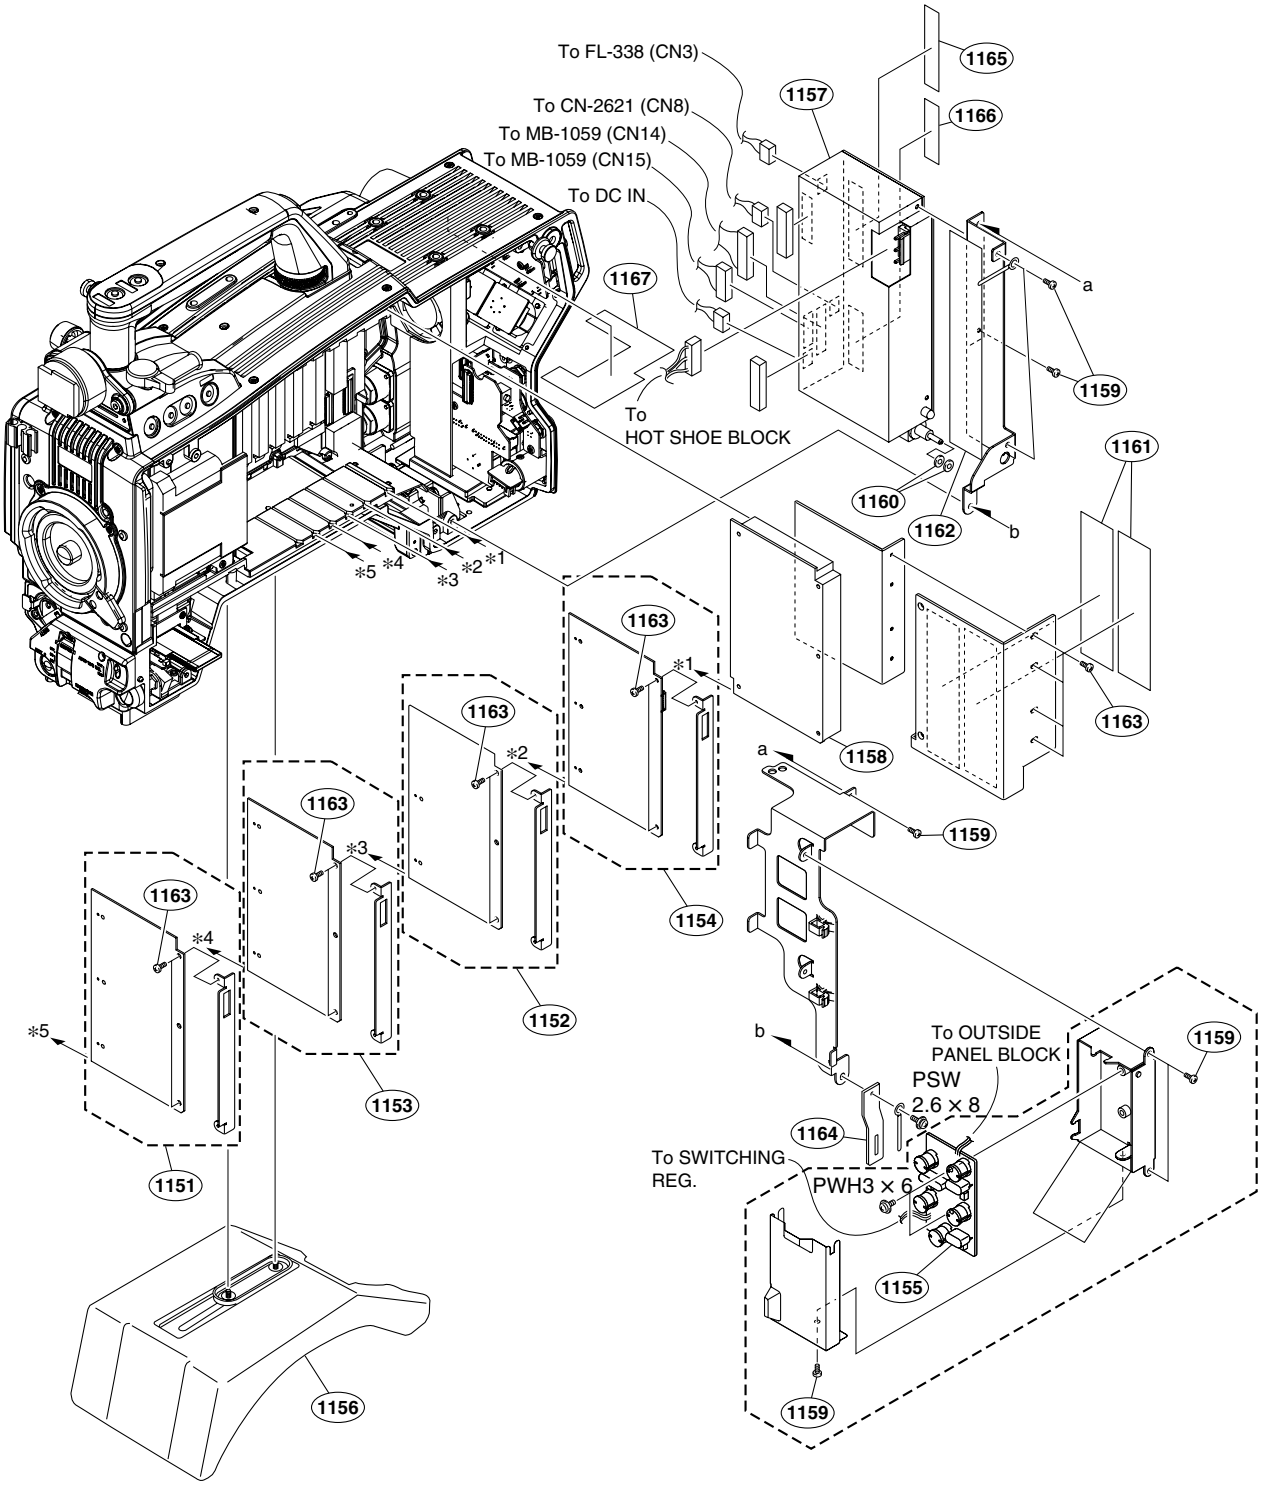※: メンテナンスマニュアルVolume 1の「1−6. 部品交換時の注意事項」を参照してください。
※: Refer to Section 1-6. “Notes for Replacing Parts” of the Maintenance Manual volume 1.

*a: Serial No. 10001 through 13159 (HDC1500: SY)
30001 through 33046 (HDC1500: J)
40001 through 40120 (HDC1500: CE)
400001 through 400349 (HDC1500: CE)
50001 through 50070 (HDC1580: CN)
30001 through 33005 (HDC1600: J)

*b: Serial No. 10001 and higher (HDC1400: UC)
30001 and higher (HDC1400: J)
400001 and higher (HDC1400: CE)
50001 and higher (HDC1400: E)
13160 and higher (HDC1500: SY)
33047 and higher (HDC1500: J)
40121 and higher (HDC1500: CE)
400350 and higher (HDC1500: CE)
50001 and higher (HDC1500: E)
50071 and higher (HDC1580: CN)
33006 and higher (HDC1600: J)
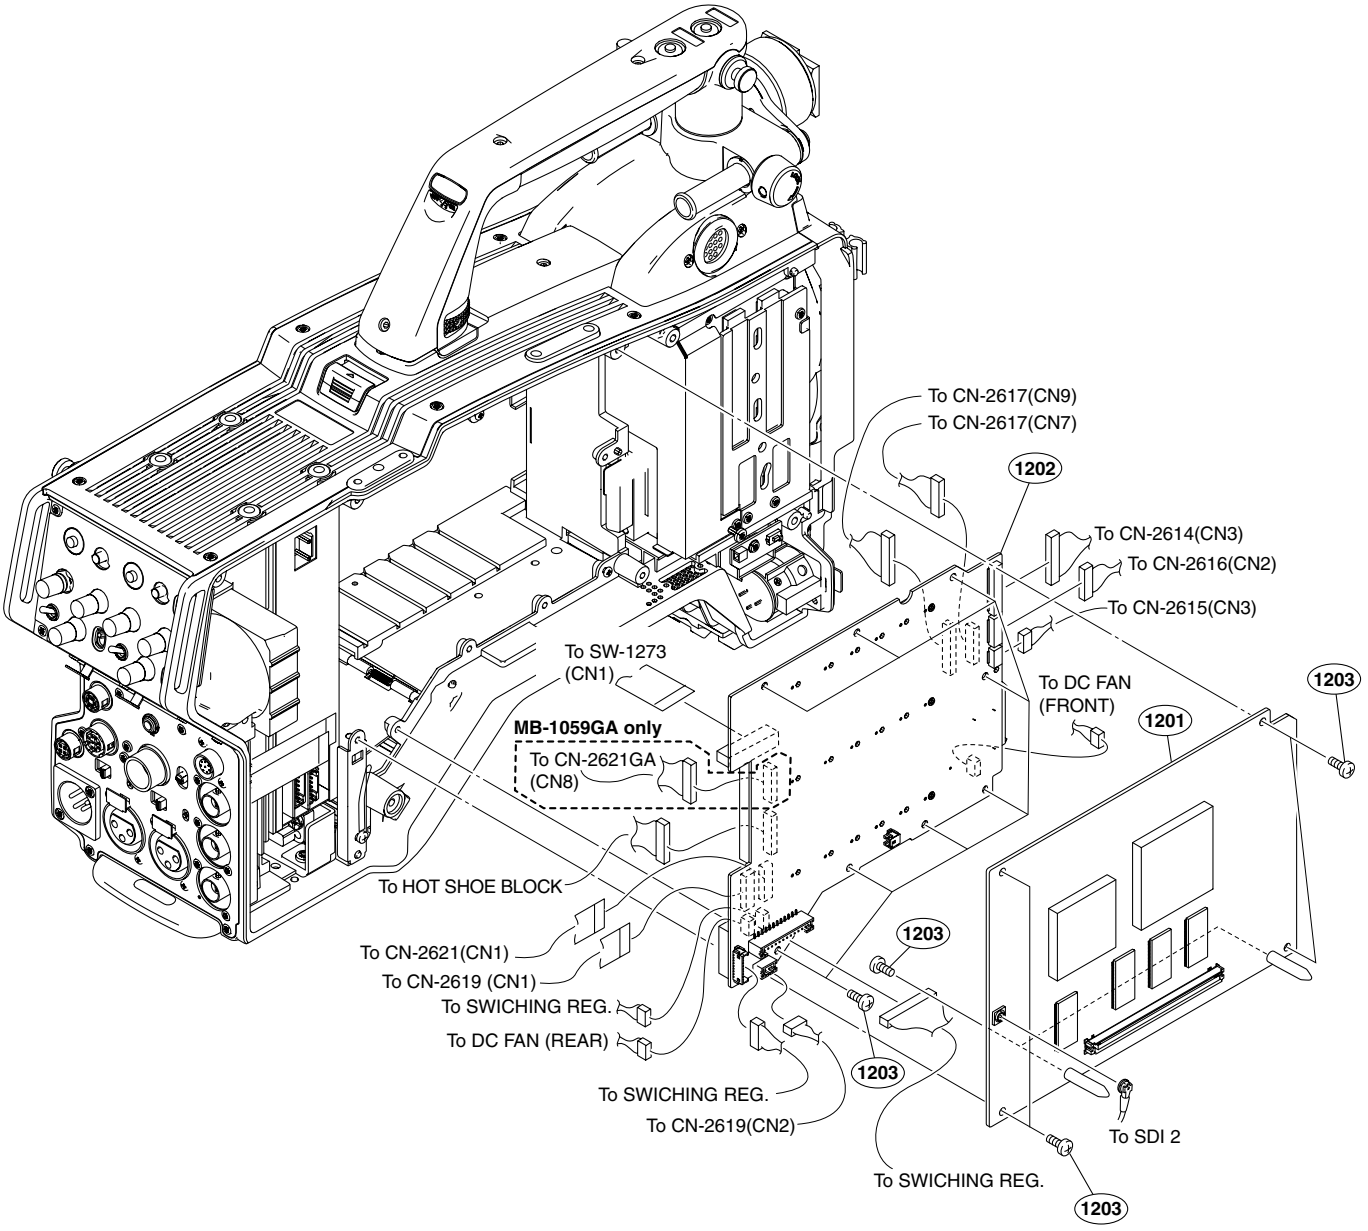
# Mother Board Block (HDC1450/1550)




| No. | Part No. | SP | Description |
|---|---|---|---|
| 1251 | ⚠ A-1101-927-A | s | MOUNTED CIRCUIT BOARD, DPR-265 |
| 1252 | ⚠✻ A-1159-988-A | s | MOUNTED CIRCUIT BOARD, MB-1059G (GOLD)*a |
| | ⚠✻ A-1101-928-A | s | MOUNTED CIRCUIT BOARD, MB-1059 (SILVER)*a |
| | ⚠ A-1251-714-A | s | MOUNTED CIRCUIT BOARD, MB-1059GA*b |
| 1253 | 3-364-941-01 | s | SCREW (+B) (2.6X5),NYLOK |
| 1254 | 3-729-076-11 | s | SCREW +B2X4 |

*a: Serial No. 10001 through 11018 (HDC1550: UC)
40001 through 40050 (HDC1550: CE)
400001 through 410061 (HDC1550: CE)

*b: Serial No. 10001 and higher (HDC1450: UC)
400001 and higher (HDC1450: CE)
11019 and higher (HDC1550: UC)
40051 and higher (HDC1550: CE)
410062 and higher (HDC1550: CE)

✻: メンテナンスマニュアルVolume 1の「1−6. 部品交換時の注意事項」を参照してください。
✻: Refer to Section 1-6. “Notes for Replacing Parts” of the Maintenance Manual volume 1.

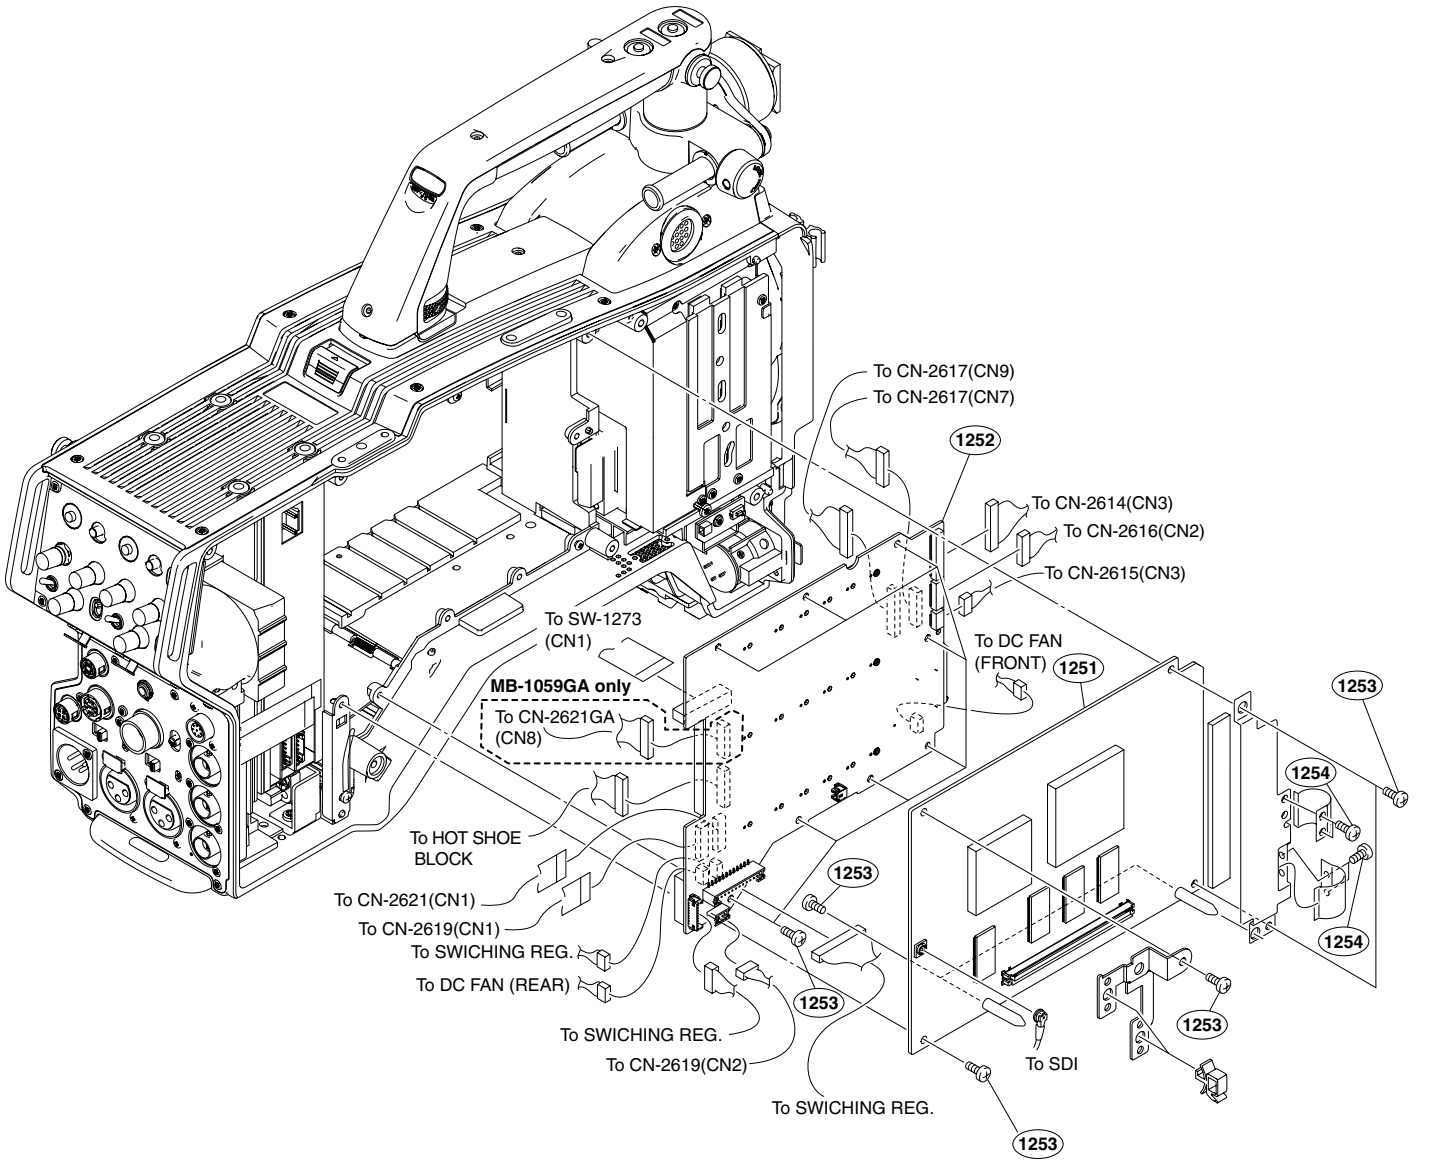


| No. | Part No. | SP | Description | |
|---|---|---|---|---|
| 1301 | 1-788-329-13 | s | DISK UNIT, FILTER (HDC1500/1550/1600) | |
| | 1-479-728-12 | s | DISK UNIT, FILTER (HDC1400/1450/1580) | |
| 1302 | 2-623-773-11 | s | BOLT (M3X8),STAINLESS | |
| 1303 | 3-603-679-02 | s | STAINLESS SCREW +B3X10 | |
| 1304 | 3-672-250-01 | s | RING(M2.6),O | (RBR) |
| 1305 | 3-673-018-11 | s | SCREW, BLIND | (PLA) |
| 1306 | 3-679-659-04 | o | CLAMP,CABLE | (PP) |
| 1307 | 3-694-181-03 | s | TYPE1,AROCK PRECISION +P2.6X5 | |
| | 7-623-208-22 | s | SPRING WASHER (SW-3)(3MM) | |

# CCD Unit (HDC1400/1450/1500/1550/1580/1600)



| No. | Part No. | SP | Description |
|---|---|---|---|
| 1401 | ⚠ A-1099-261-A | s | MOUNTED CIRCUIT BOARD, CN-2578 (for HDC1400/1450/1500/1550/1580) |
| | ⚠ A-1099-206-A | s | MOUNTED CIRCUIT BOARD, CN-2712 (for HDC1600) |
| 1402 | A-1153-996-C | s | CCD UNIT 1000HDC (for HDC1400/1450/1500/1550) |
| | A-1212-220-A | s | CCD UNIT 1580 (HDC1580) |
| | A-1153-997-B | s | CCD UNIT 1100HDC (for HDC1600) |
| 1403 | ⚠※ A-1159-980-B | s | MOUNTED CIRCUIT BOARD, TG-243G (GOLD) (for HDC1400/1450/1500/1550) |
| | ⚠※ A-1101-922-A | s | MOUNTED CIRCUIT BOARD, TG-243 (SILVER) (for HDC1500/1550) |
| | ⚠ A-1179-309-A | s | MOUNTED CIRCUIT BOARD, TG-243CG (for HDC1580) |
| | ⚠※ A-1159-992-A | s | MOUNTED CIRCUIT BOARD, TG-247G (GOLD) (for HDC1600) |
| | ⚠※ A-1126-983-A | s | MOUNTED CIRCUIT BOARD, TG-247 (SILVER) (for HDC1600) |
| 1404 | ⚠※ A-1159-981-A | s | MOUNTED CIRCUIT BOARD, DR-528G (GOLD) (for HDC1400/1450/1500/1550/1580) |
| | ⚠※ A-1099-260-A | s | MOUNTED CIRCUIT BOARD, DR-528 (SILVER) (for HDC1500/1550) |
| | ⚠※ A-1159-993-A | s | MOUNTED CIRCUIT BOARD, DR-562G (GOLD) (for HDC1600) |
| | ⚠※ A-1099-205-A | s | MOUNTED CIRCUIT BOARD, DR-562 (SILVER) (for HDC1600) |
| 1405 | ⚠※ A-1159-982-A | s | MOUNTED CIRCUIT BOARD, PA-317G (GOLD) (for HDC1400/1450/1500/1550) |
| | ⚠※ A-1099-263-A | s | MOUNTED CIRCUIT BOARD, PA-317 (SILVER) (for HDC1500/1550) |
| | ⚠ A-1175-915-A | s | MOUNTED CIRCUIT BOARD, PA-317CG (for HDC1580) |
| | ⚠※ A-1159-994-A | s | MOUNTED CIRCUIT BOARD, PA-327G (GOLD) (for HDC1600) |
| | ⚠※ A-1099-203-A | s | MOUNTED CIRCUIT BOARD, PA-327 (SILVER) (for HDC1600) |
| 1406 | ⚠※ A-1159-983-A | s | MOUNTED CIRCUIT BOARD, CN-2579G (GOLD) (for HDC1400/1450/1500/1550/1580) |
| | ⚠※ A-1099-262-A | s | MOUNTED CIRCUIT BOARD, CN-2579 (SILVER) (for HDC1500/1550) |
| | ⚠※ A-1159-995-A | s | MOUNTED CIRCUIT BOARD, CN-2723G (GOLD) (for HDC1600) |
| | ⚠※ A-1099-210-A | s | MOUNTED CIRCUIT BOARD, CN-2723 (SILVER) (for HDC1600) |
| 1407 | 1-758-483-11 | o | FILTER UNIT, OPTICAL |
| 1408 | ※ 1-831-656-11 | s | CABLE, FLEXIBLE FLAT (30 CORE) (GOLD) |
| | ※ 1-830-735-11 | s | CABLE, FLEXIBLE FLAT (30 CORE) (SILVER) |
| 1409 | ※ 1-831-659-11 | s | CABLE, FLEXIBLE FLAT (45 CORE) (GOLD) (for HDC1400/1450/1500/1550/1580) |
| | ※ 1-830-484-11 | s | CABLE, FLEXIBLE FLAT (45 CORE) (SILVER) (for HDC1500/1550) |
| | ※ 1-831-660-11 | s | CABLE, FLEXIBLE FLAT (50 CORE) (GOLD) (for HDC1600) |
| | ※ 1-830-794-11 | s | CABLE, FLEXIBLE FLAT (50 CORE) (SILVER) (for HDC1600) |
| 1410 | ※ 1-831-658-11 | s | CABLE, FLEXIBLE FLAT (40 CORE) (GOLD) |
| | ※ 1-830-485-11 | s | CABLE, FLEXIBLE FLAT (40 CORE) (SILVER) |
| 1411 | 3-699-048-01 | s | CAP,MOUNT |
| 1412 | 3-729-076-11 | s | SCREW +B2X4 (STEEL) |
| 1413 | 3-965-077-01 | s | SCREW, SPECIAL (M2) |
| 1414 | 4-644-165-01 | s | SCREW (M2.6X4),0 PLATE P1 MAIN |
| 1415 | 3-729-013-31 | s | HEAD (+P1.4X3),WASHER |
| 1416 | 9-885-001-63 | s | LEVER, MOUNT |
| 1417 | 9-885-018-96 | s | RING, BAYONET |
| | 7-627-452-18 | s | SCREW,PRECISION +K 2X3 |

※: メンテナンスマニュアルVolume 1の「1−6. 部品交換時の注意事項」を参照してください。
※: Refer to Section 1-6. “Notes for Replacing Parts” of the Maintenance Manual volume 1.
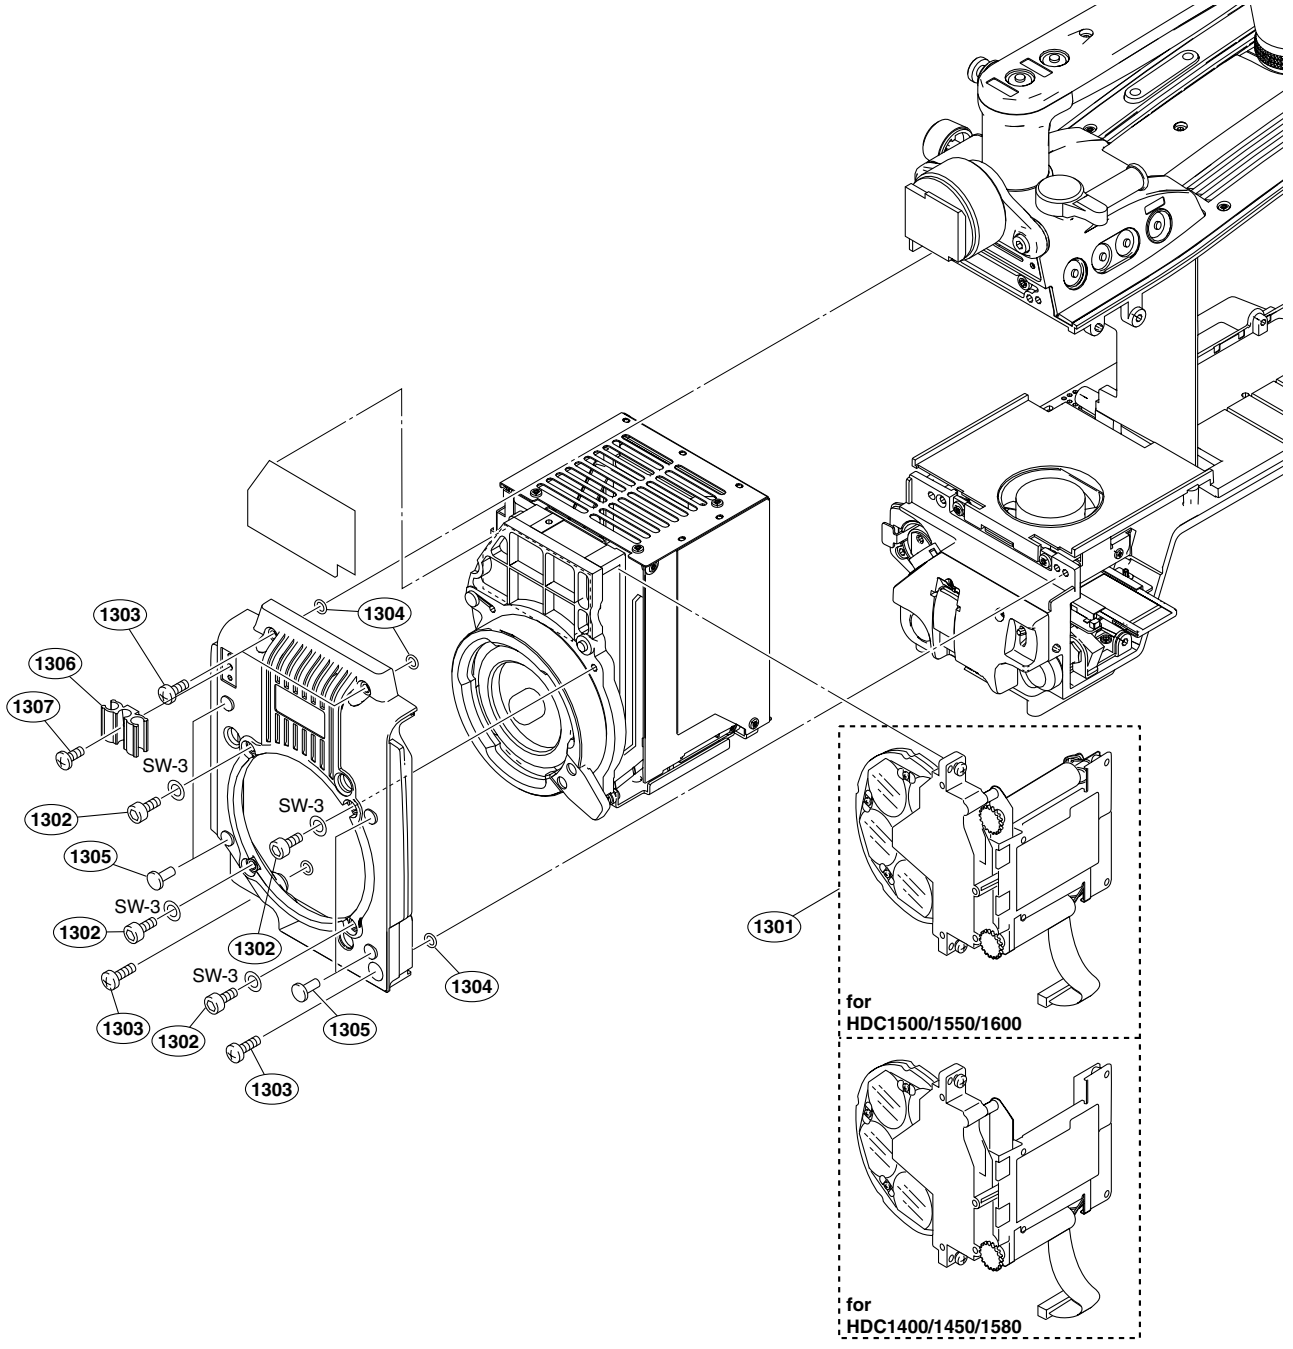
# Front Chassis Block (HDC1400/1450/1500/1550/1580/1600)



| No. | Part No. | SP | Description |
|---|---|---|---|
| 1501 ⚠ | A-1099-117-A | s | MOUNTED CIRCUIT BOARD, CN-2617 |
| 1502 ⚠ | A-1099-127-A | s | MOUNTED CIRCUIT BOARD, SW-1239 |
| 1503 | A-1128-453-A | s | FRONT SWITCHCOVER ASSY |
| 1504 | A-8279-993-B | s | SHOE(D)ASSY,V |
| 1505 | 1-787-070-11 | s | FAN, DC (41 SQUARE) |
| 1506 | 3-364-941-01 | s | SCREW (+B) (2.6X5),NYLOK |
| 1507 | 3-679-668-01 | s | BUTTON,VTR START |
| 1508 | 3-679-679-04 | s | KNOB, VR (AUDIO) |
| 1509 | 3-692-111-02 | s | KNOB,RE |
| 1510 | 3-701-822-01 | s | HOLDER, WIRE |
| 1511 | 3-703-357-08 | s | PIN (DIA 1.6SERISE) (STEEL) |
| 1512 | 3-729-072-02 | s | SCREW, +K (4X8) |
| 1513 | 3-729-076-11 | s | SCREW +B2X4 (STEEL) |
| 1514 | 3-742-066-01 | s | SPRING, SHUTTER |
| 1515 | 3-742-067-05 | s | LID, SHUTTER |
| 1518 | 3-872-587-01 | s | CUSHION,TOGGLE-SW |
| 1519 | 3-872-601-01 | s | TOGGLE SW CUSHION(C) |
| 1520 | 3-986-534-02 | s | BAND, HANGING (FRONT) |
| 1521 | 4-654-273-02 | s | ACE (M2), LOCK |
| | 7-627-553-48 | s | SCREW, +P2X4 |
| | 7-627-556-58 | s | SCREW,PRECISION +P2.6X5 |
| | 7-682-160-09 | s | SCREW +P4X6 |
| | 7-685-533-14 | s | SCREW +BTP2.6X6 |

# Handle Assembly (HDC1400/1450/1500/1550/1580/1600)

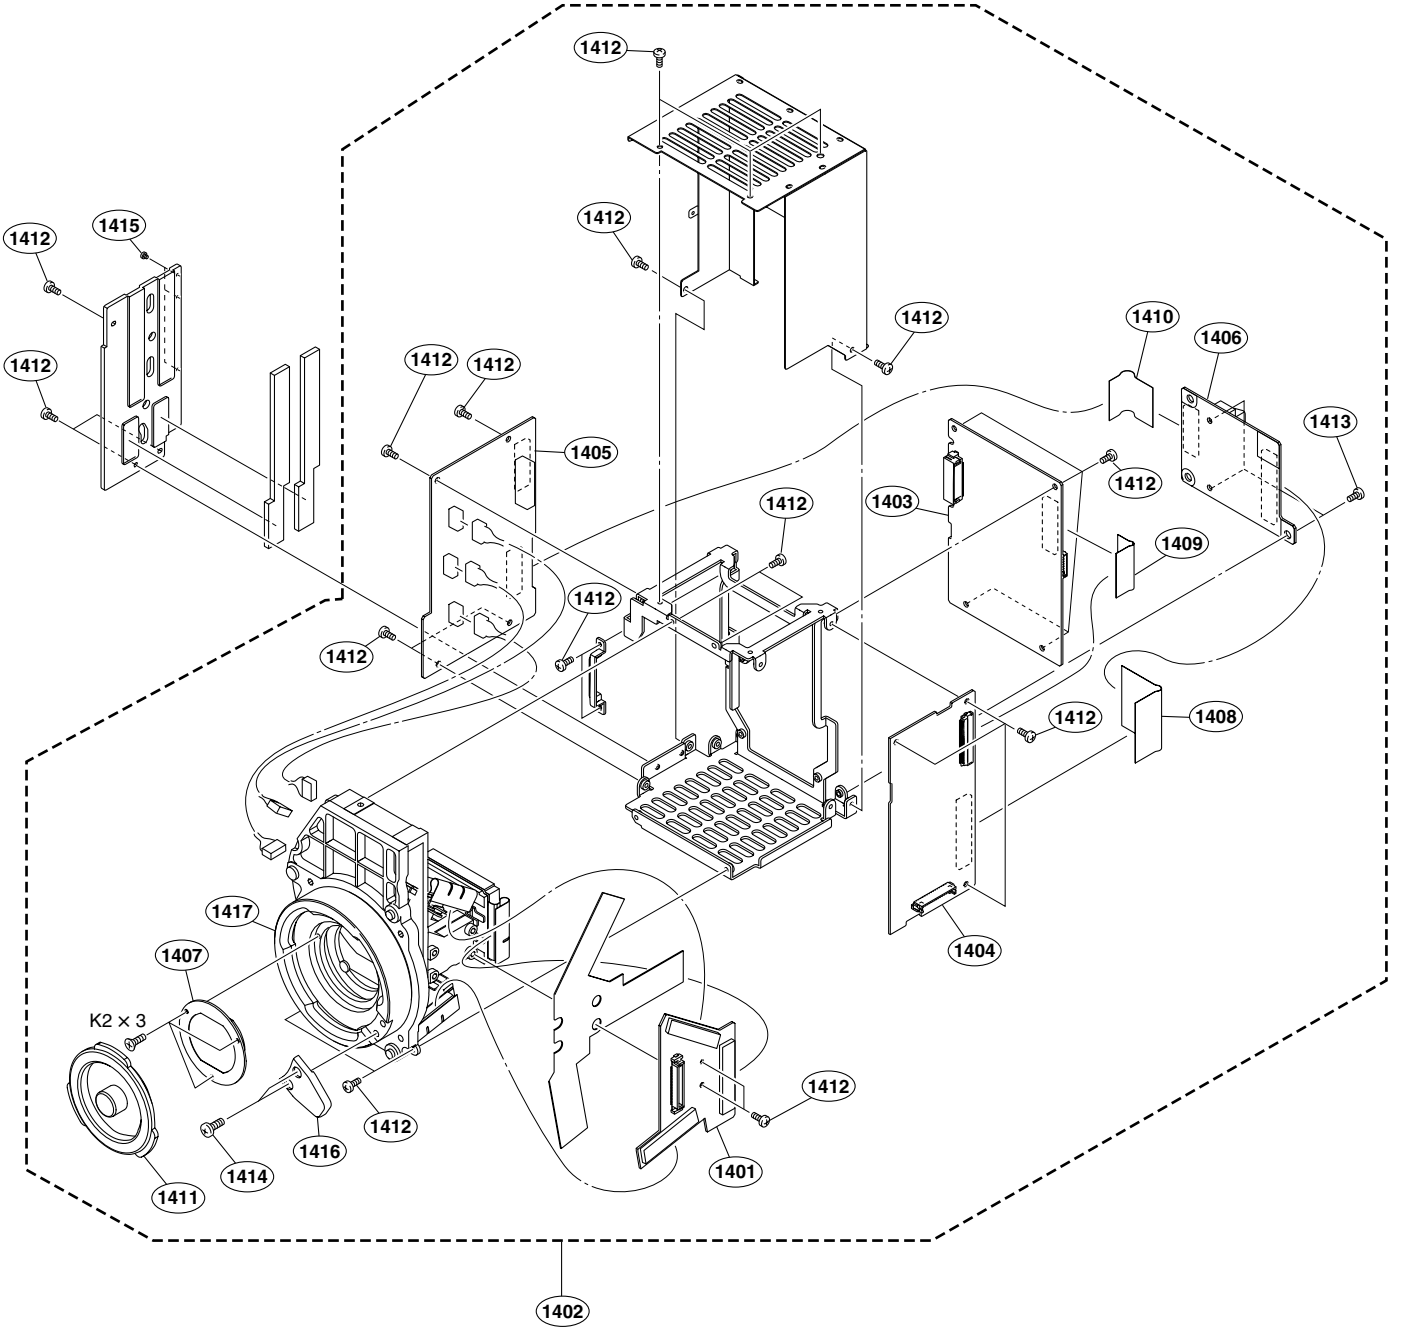

| No. | Part No. | SP | Description |
|---|---|---|---|
| 1601 | ⚠ A-1172-523-A | s | MOUNTED CIRCUIT BOARD, CN-2614B |
| 1602 | ⚠ A-1099-125-A | s | MOUNTED CIRCUIT BOARD, SW-1237 |
| 1603 | A-1128-447-A | s | HANDLE COVER ASSY |
| 1604 | A-8278-412-H | s | SHOE ASSY,VF |
| 1605 | X-3704-669-1 | s | HANDLE JIKUUKE PLATE ASSY |
| 1606 | 1-963-914-11 | s | HARNESS, SUB (HANDLE SW) |
| 1607 | 3-186-958-01 | o | NUT (VF), PLATE |
| 1608 | 3-364-941-01 | s | SCREW (+B) (2.6X5),NYLOK |
| 1609 | 3-612-822-01 | s | SPRING,COMPRESSION |
| 1610 | 3-627-853-06 | s | SHOE,SLIDE |
| 1611 | 3-628-261-01 | s | PIPE,VF SLIDE |
| 1612 | 3-657-705-91 | s | BOLT (M4X8), HEXAGON HOLE |
| 1613 | 3-673-018-11 | s | SCREW, BLIND (PLA) |
| 1614 | 3-673-046-03 | s | LEVER, LOCK |
| 1615 | 3-676-244-03 | s | COVER, SWITCH |
| 1616 | 3-676-244-21 | s | COVER,SWITCH |
| 1617 | 3-679-684-01 | o | REST,ARM |
| 1618 | 3-679-702-01 | o | CUSHION,STOPPER(SLIDE ASSY) |
| 1619 | 3-690-660-02 | s | LOCK,SCREW |
| 1620 | 3-690-674-02 | s | KNOB,LOCK |
| 1621 | 3-701-507-00 | s | SET-SCREW,HEX 3X5 ST |
| 1622 | 3-710-024-02 | s | PACKING,VF |
| 1623 | 3-711-765-01 | s | BOLT(M3),HEXAGON SOCKET(STEEL) |
| 1624 | 3-729-076-11 | s | SCREW +B2X4 (STEEL) |
| 1625 | 3-872-532-02 | s | HANDLE |
| 1626 | 3-872-534-02 | s | WASHER02 |
| 1627 | 3-872-543-01 | s | SPRING,COMPRESSION(HANDLELOCK) |
| 1628 | 3-872-563-01 | s | SHEET,HANDLE |
| 1629 | 3-872-601-01 | s | TOGGLE SW CUSHION(C) |
| 1630 | 3-872-609-02 | s | WASHER01 |
| 1631 | 3-872-615-01 | s | PLATE,VF SLIDE (Normal Type) |
| | 3-872-542-01 | s | PLATE,VF SLIDE(LONG) (Long Type) |
| 1632 | 3-895-622-01 | s | RING (DIA. 5), O (NBR) |
| 1634 | *a 3-872-580-03 | s | LABEL (HANDLE) |
| | 7-623-208-22 | s | SPRING WASHER (3MM) |
| | 7-627-556-98 | s | SCREW,PRECISION +P 2.6X8 TYPE1 |
| | 7-682-548-09 | s | SCREW +B 3X8 |
| | 7-682-546-09 | s | SCREW +B 3X5 |

*a 1 枚のシートの中に，両方のラベルがあります。
*a Both labels are in one sheet.

# Intercom Panel Block (HDC1400/1450/1500/1550/1580/1600)

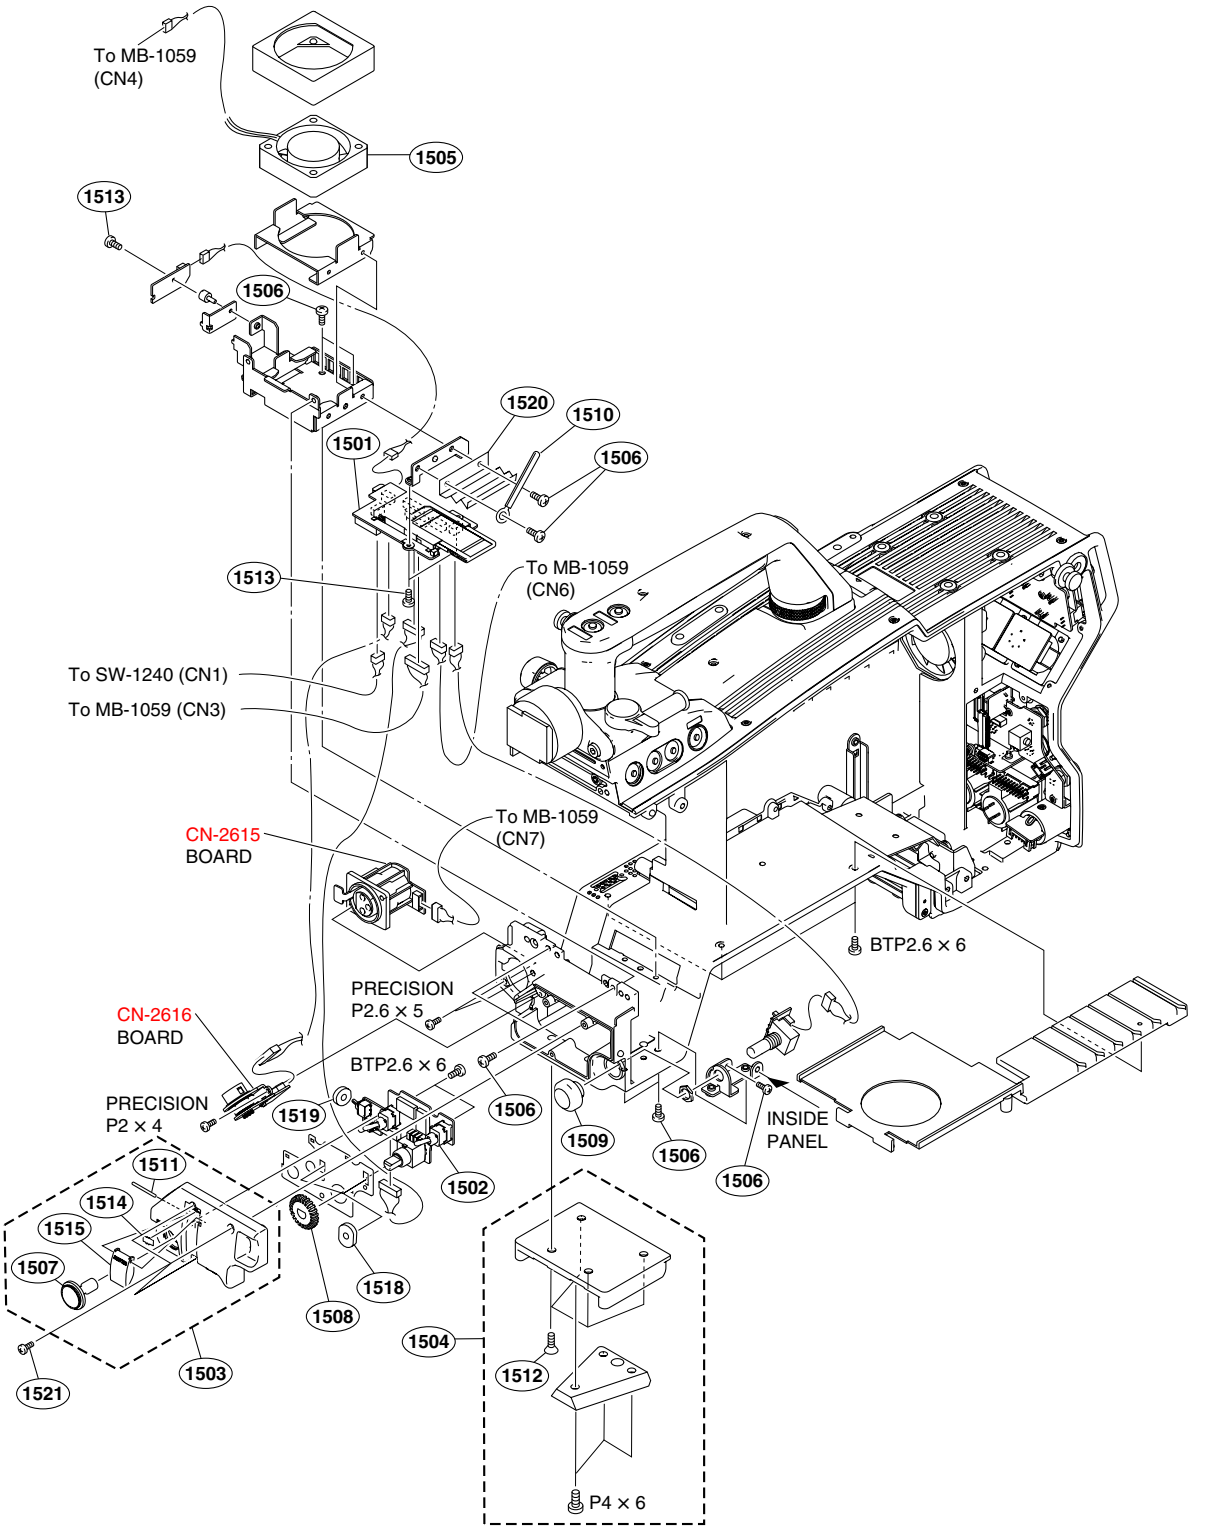**For HDC1400 (CE)/1400 (E)/1450 (CE)/1500 (CE)/1500 (E)/HDC1550 (CE)/HDC1580 (CN)**

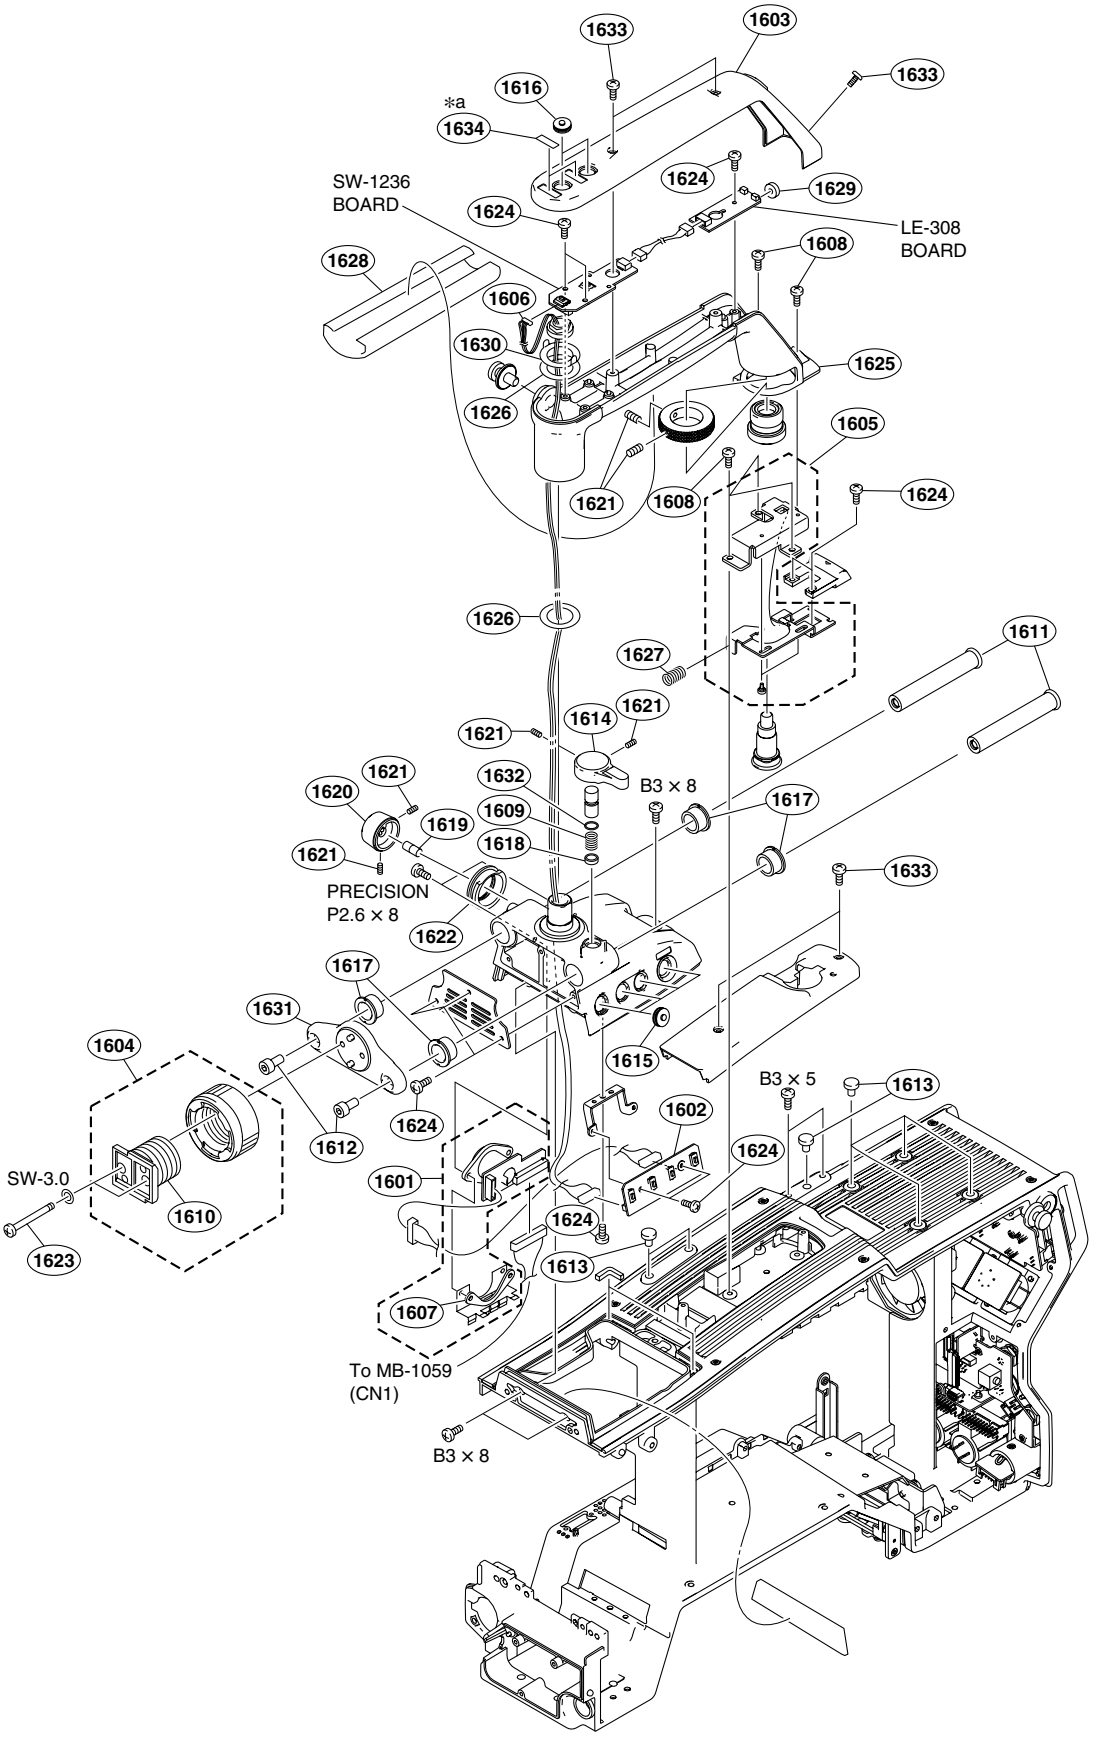


**For HDC1400 (UC)/1400 (J)/1450 (UC)/HDC1500 (SY,J)/ HDC1550 (UC)/HDC1600 (J)**



| No. | Part No. | SP | Description |
|---|---|---|---|
| 1701 ⚠ | A-1099-129-A | s | MOUNTED CIRCUIT BOARD, SW-1241 (HDC1400(UC, J)/1450(UC)/1500(SY,J)/1550(UC)/1600(J)) |
| ⚠ | A-1166-843-A | s | MOUNTED CIRCUIT BOARD, SW-1241B (HDC1400(CE, E)/1450(CE)/1500(CE, E)/1550(CE)/1580(CN)) |
| 1702 ⚠※ | A-1159-986-A | s | MOUNTED CIRCUIT BOARD, SW-1273G (GOLD) |
| ⚠※ | A-1099-356-A | s | MOUNTED CIRCUIT BOARD, SW-1273 (SILVER) |
| 1703 | X-3604-579-2 | s | VOLUME KNOB ASSY |
| 1704 | 1-238-294-11 | s | RESISTOR, VAR,CARBON 100K |
| 1705 | 1-570-608-11 | s | SWITCH,TOGGLE |
| 1706 | 1-570-985-11 | s | SWITCH,TOGGLE |
| 1707 | 1-786-887-11 | s | SWITCH,ROTARY |
| 1708 ※ | 1-831-661-11 | s | CABLE, FLEXIBLE FLAT (36 CORE) (GOLD) (HDC1400/1450/1500/1550/1580/1600) |
| ※ | 1-830-482-11 | s | CABLE, FLEXIBLE FLAT (36 CORE) (SILVER) (HDC1500/1550/1600) |
| 1709 | 3-676-244-21 | s | COVER,SWITCH |
| 1710 | 3-685-104-01 | s | NUT(M6),CONTROL (STEEL) |
| 1711 | 3-869-842-01 | s | CAP,SW |
| 1712 | 3-872-595-02 | s | SHEET,BORON |
| 1713 | 3-872-599-04 | s | SHEET,REAR UPPER |
| 1714 | 3-872-618-01 | s | SHEET,BORON(RET SELECT) |
| 1715 | 3-872-637-05 | s | PANEL,INCOM |
| 1716 | 3-903-660-01 | s | DROP PROTECTION,TOGGLE |
| 1717 | 3-986-536-01 | s | SHEET,BORON(MIC SW) |
| 1718 | 4-654-273-02 | s | ACE (M2), LOCK |
| 1719 | 3-903-659-02 | s | KNOB RET SELECT |
| | 7-621-772-20 | s | SCREW +B 2X5 |
| | 7-627-556-58 | s | SCREW,PRECISION +P2.6X5 |

※: メンテナンスマニュアルVolume 1の「1−6. 部品交換時の注意事項」を参照してください。
※: Refer to Section 1-6. “Notes for Replacing Parts” of the Maintenance Manual volume 1.

# MIC Panel Assembly (HDC1400/1450/1500/1550/1580/1600)

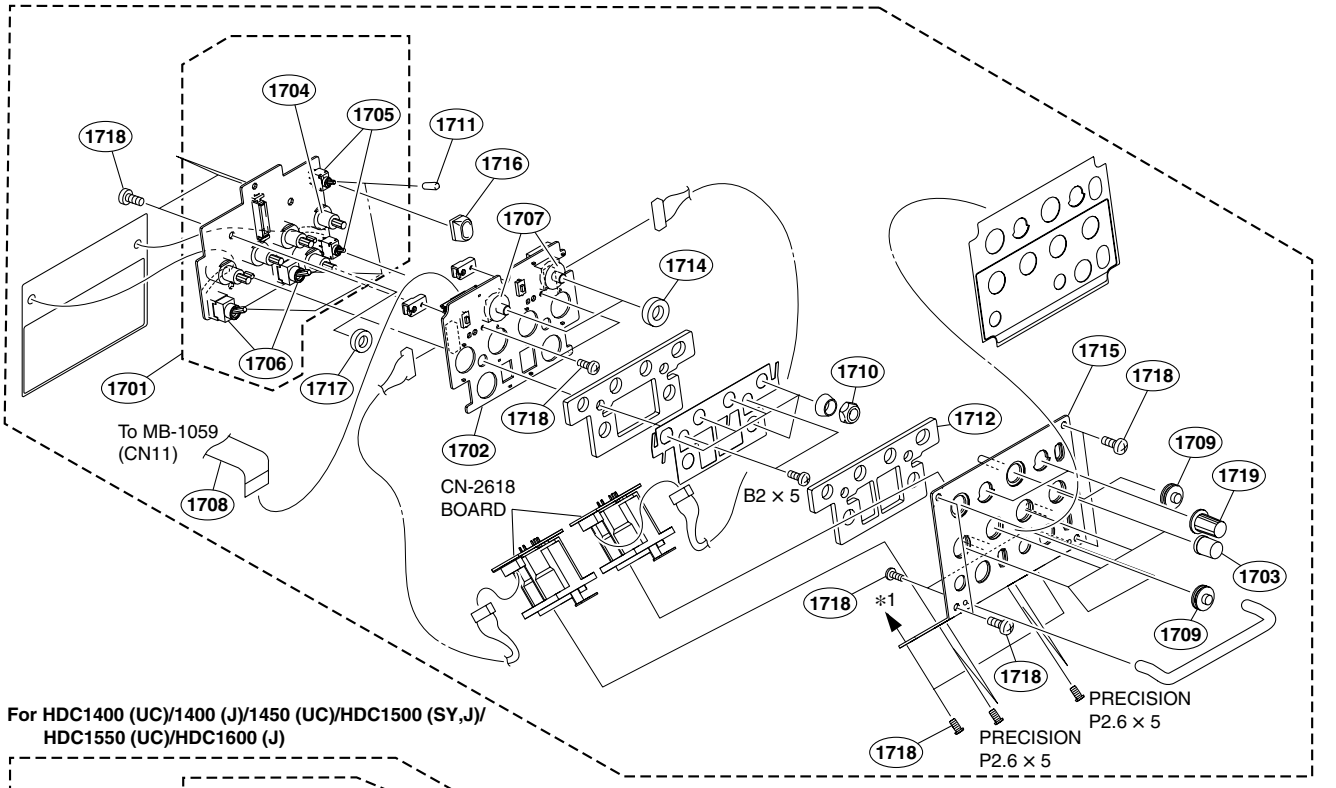

| No. | Part No. | SP | Description |
|---|---|---|---|
| 1801 ⚠※ | A-1159-984-A | s | MOUNTED CIRCUIT BOARD, CN-2619G (GOLD) (HDC1400/1450/1500/1550/1580/1600) |
| ⚠※ | A-1099-119-A | s | MOUNTED CIRCUIT BOARD, CN-2619 (SILVER) (HDC1500/1550/1600) |
| 1802 ⚠※ | A-1159-985-A | s | MOUNTED CIRCUIT BOARD, CN-2621G (GOLD) (HDC1500/1550/1580/1600)*a |
| ⚠※ | A-1099-121-A | s | MOUNTED CIRCUIT BOARD, CN-2621 (SILVER) (HDC1500/1550/1600)*a |
| ⚠ | A-1251-711-A | s | MOUNTED CIRCUIT BOARD, CN-2621GA (HDC1400/1450/1500/1550/1580/1600)*b |
| 1803 | 1-784-240-11 | s | CONVERTER, COAXIAL CONNECTOR (HDC1500/1550/1600) |
| 1804 | 1-830-742-11 | s | CABLE ASSEMBLY, COAXIAL (HDC1500/1550/1600) |
| 1805 ※ | 1-833-557-11 | s | CABLE, FLEXIBLE FLAT (40 CORE) (GOLD) (HDC1400/1450/1500/1550/1580/1600) |
| ※ | 1-830-483-11 | s | CABLE, FLEXIBLE FLAT (40 CORE) (SILVER) (HDC1500/1550/1600) |
| 1806 ※ | 1-831-663-11 | s | CABLE, FLEXIBLE FLAT (36 CORE) (GOLD) (HDC1400/1450/1500/1550/1580/1600) |
| ※ | 1-830-752-11 | s | CABLE, FLEXIBLE FLAT (36 CORE) (SILVER) (HDC1500/1550/1600) |
| 1807 | 3-729-076-11 | s | SCREW +B2X4 (STEEL) |
| 1808 | 3-748-142-01 | s | COVER,CONNECTOR |
| 1809 | 3-796-985-02 | s | CUSHION,DROP PROTECTION |
| 1810 | 3-796-986-01 | s | KNOB,SLIDE SW |
| 1811 | 3-796-993-01 | s | CUSION DROP PROTEICTION TOGGLE |
| 1812 | 3-796-995-01 | s | DROP PROTECTION(SW) |
| 1813 | 3-796-996-02 | s | KNOB(A),SW |
| 1814 | 3-868-657-03 | s | CAP,BNC |
| 1815 | 3-872-598-02 | s | PLATE,MIC PANEL |
| 1816 | 3-872-935-01 | s | CAP,BNC |
| 1817 | 3-903-833-02 | s | CAP,CONNECTOR |
| 1818 | 3-965-077-02 | s | SCREW, SPECIAL (M2) |
| 1819 | 4-654-273-02 | s | ACE (M2), LOCK |
| 1820 | 3-993-496-01 | s | SHEET2 (TRIAX), PROMPTER (HDC1550) |
| | 3-211-442-01 | s | LABEL, PROMPTER/SDI (HDC1400) |
| | 3-285-820-01 | s | LABEL, PROMPTER/SDI1450 |
| | 7-627-556-58 | s | SCREW,PRECISION +P2.6X5 |

※: メンテナンスマニュアルVolume 1の「1-6. 部品交換時の注意事項」を参照してください。
※: Refer to Section 1-6. “Notes for Replacing Parts” of the Maintenance Manual volume 1.

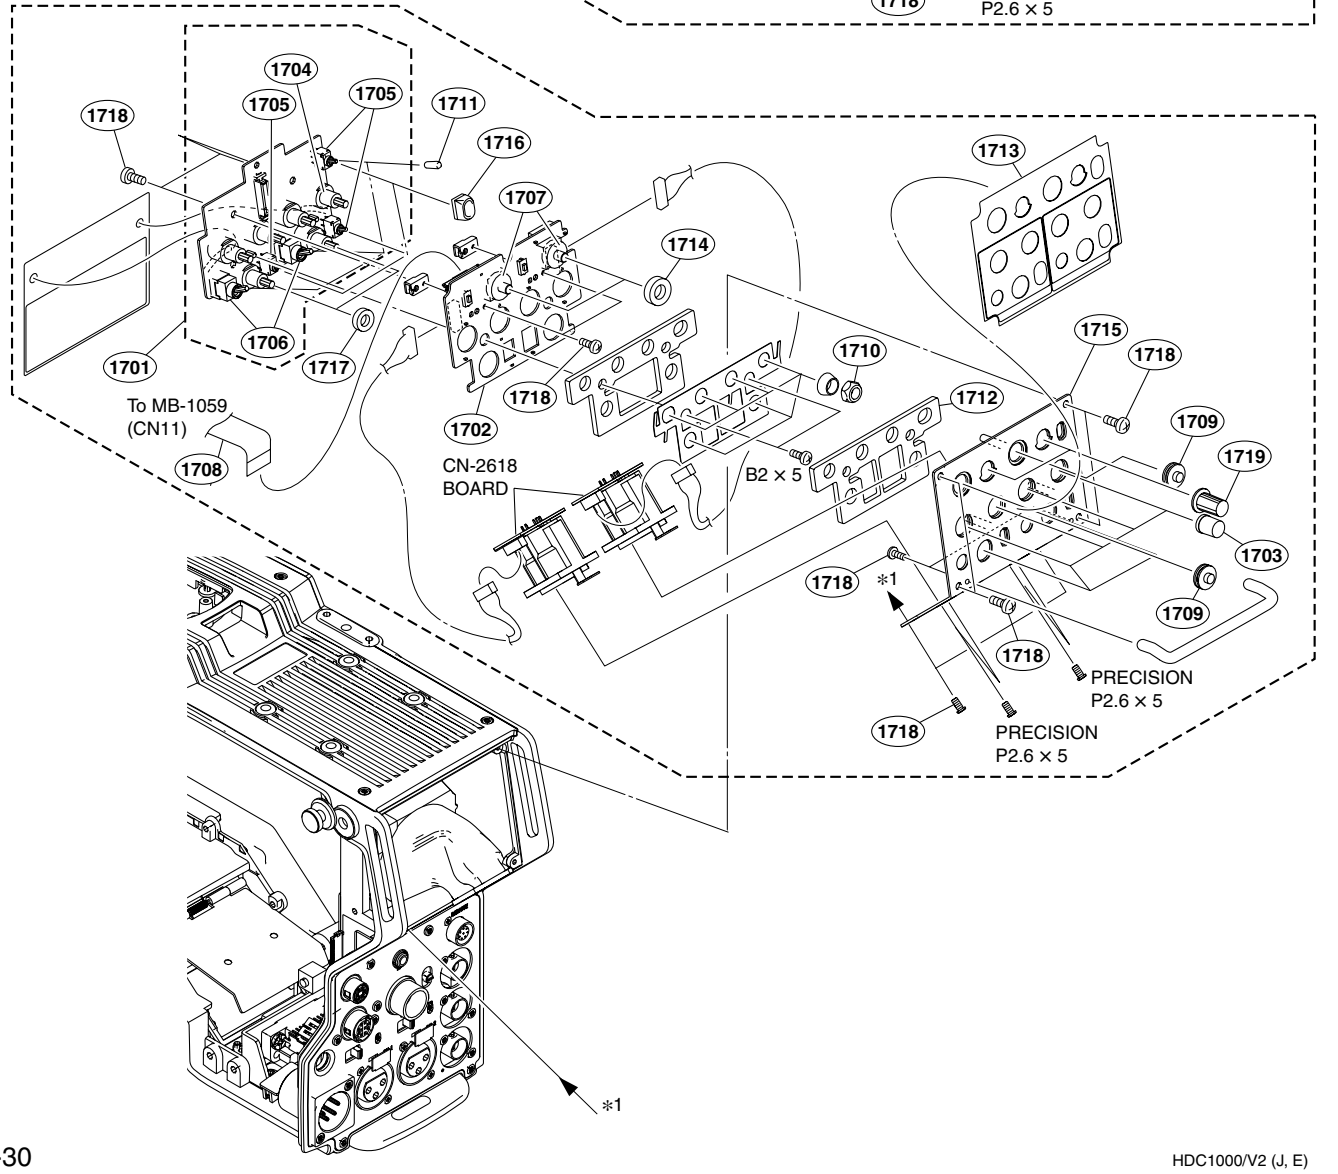*a: Serial No. 10001 through 13159 (HDC1500: SY)
30001 through 33046 (HDC1500: J)
40001 through 40120 (HDC1500: CE)
400001 through 400349 (HDC1500: CE)
10001 through 11018 (HDC1550: UC)
40001 through 40050 (HDC1550: CE)
400001 through 410061 (HDC1550: CE)
50001 through 50070 (HDC1580: CN)
30001 through 33005 (HDC1600: J)

*b: Serial No. 10001 and higher (HDC1400: UC)
30001 and higher (HDC1400: J)
400001 and higher (HDC1400: CE)
50001 and higher (HDC1400: E)
10001 and higher (HDC1450: UC)
400001 and higher (HDC1450: CE)
13160 and higher (HDC1500: SY)
33047 and higher (HDC1500: J)
40121 and higher (HDC1500: CE)
400350 and higher (HDC1500: CE)
50001 and higher (HDC1500: E)
11019 and higher (HDC1550: UC)
40051 and higher (HDC1550: CE)
410062 and higher (HDC1550: CE)
50071 and higher (HDC1580: CN)
33006 and higher (HDC1600: J)

## Hotshoe Block (HDC1400/1450/1500/1550/1580/1600)

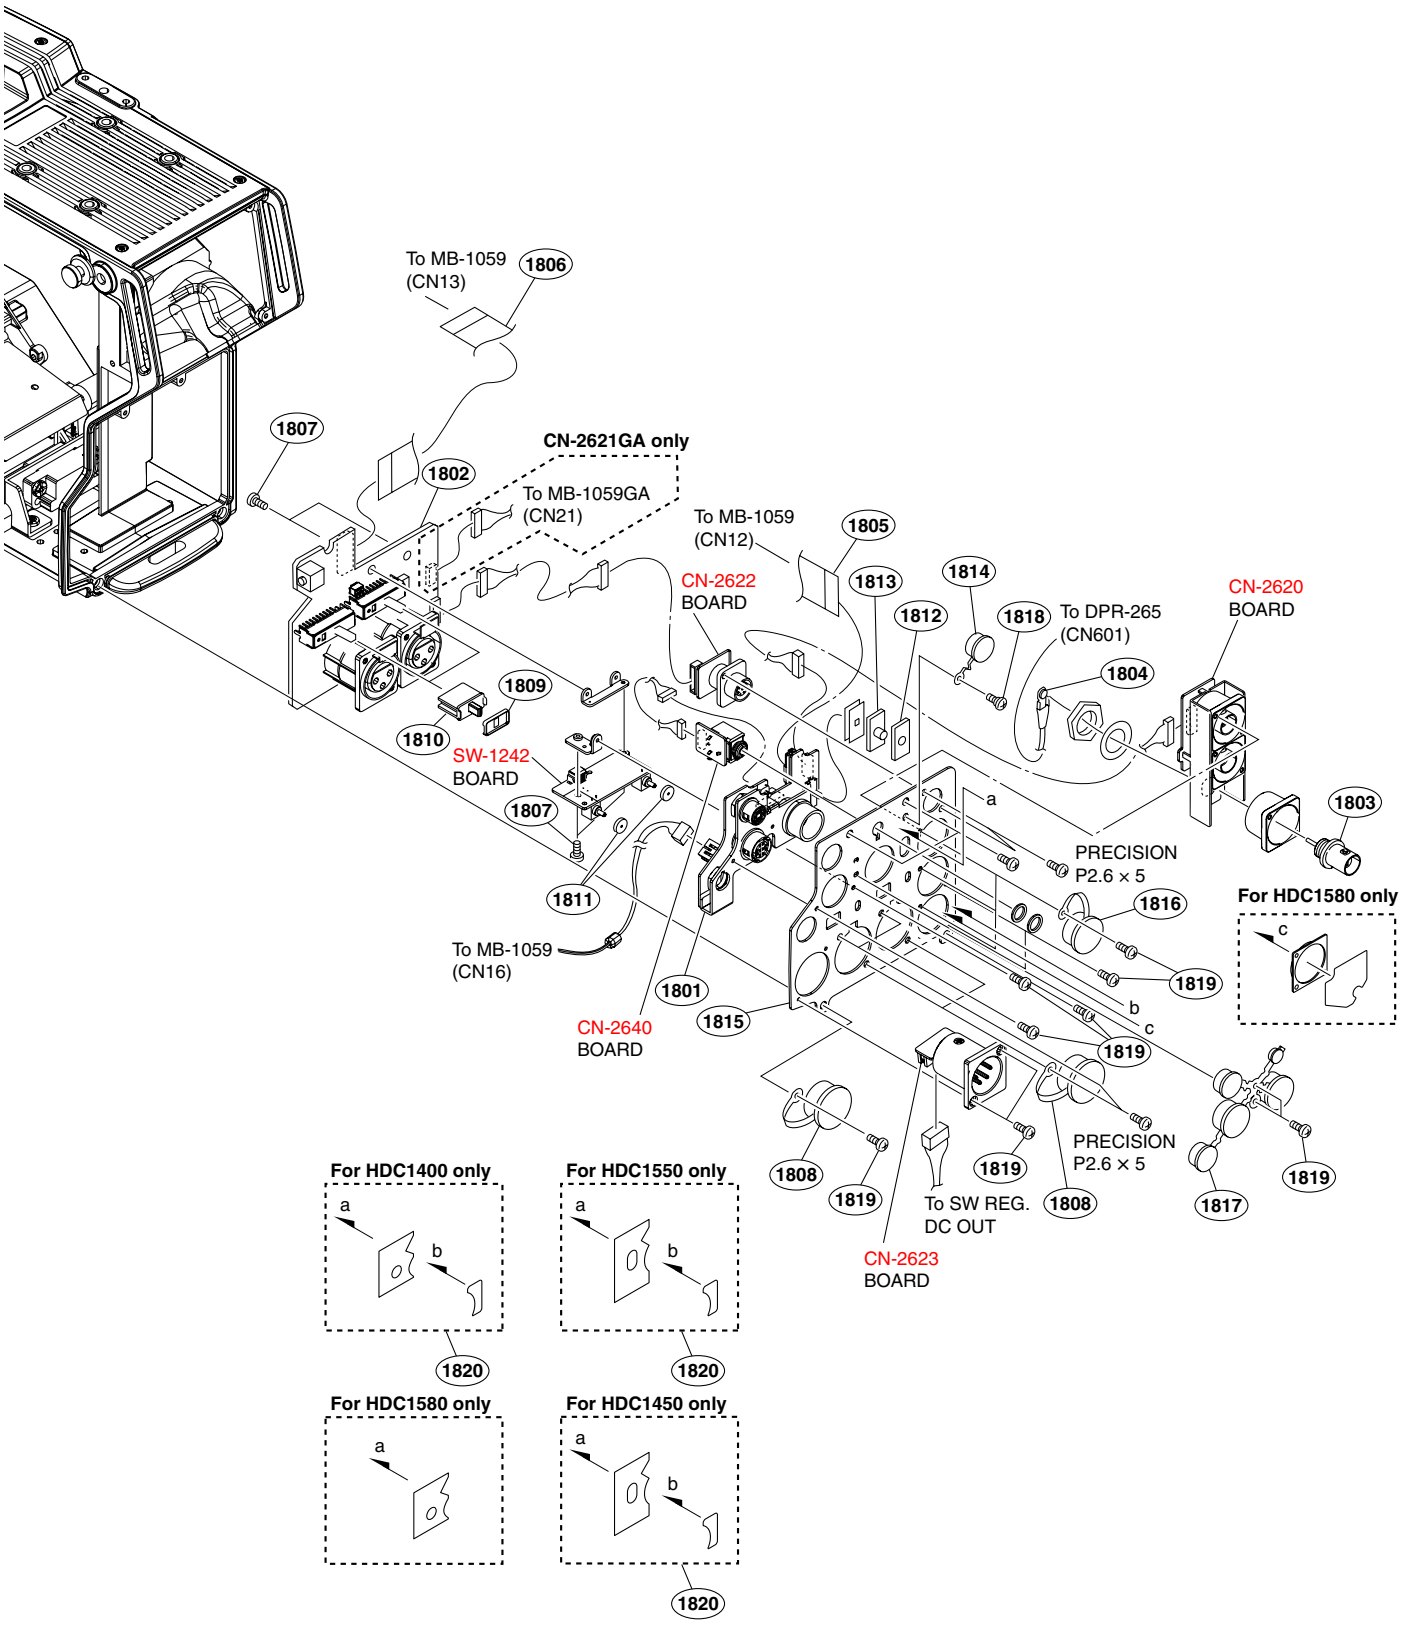


| No. | Part No. | SP | Description |
|---|---|---|---|
| 1901 | X-3704-670-1 | s | HOT DOOR |
| 1902 ⚠ | 1-787-070-11 | s | FAN, DC (41 SQUARE) |
| 1903 | 1-963-924-11 | s | HARNESS, SUB (BUILD UP) |
| 1904 | 3-364-941-01 | s | SCREW (+B) (2.6X5),NYLOK |
| 1905 | 3-626-781-03 | s | STOPPER |
| 1906 | 3-626-960-02 | s | GUARD,TAIL |
| 1907 | 3-872-522-02 | s | SPRING,COMPRESSION(STOPPER) |
| 1908 | 3-872-541-01 | s | BASE,HOT SHOE |
| 1909 | 3-872-551-01 | s | STOPPER(L),HOT DOOR |
| 1910 | 3-872-573-01 | s | WATER PROTECT(HOT DOOR) |
| 1911 | 3-872-550-01 | s | STOPPER(R),HOT DOOR |
| 1912 | 4-654-273-02 | s | ACE (M2), LOCK |
| | 7-621-555-30 | s | SCREW +K 2X5(EP-FE/ZNBK/CM2) |
| | 7-621-775-20 | s | SCREW +B2.6X5 |
| | 7-682-546-09 | s | SCREW +B3X5 |
| | 7-682-548-09 | s | SCREW +B 3X8 |

## 1-3. Electrical Parts List

---
AT-163 BOARD
---

*1: [Board No. suffix 12]
*2: [Board No. suffix 13-]
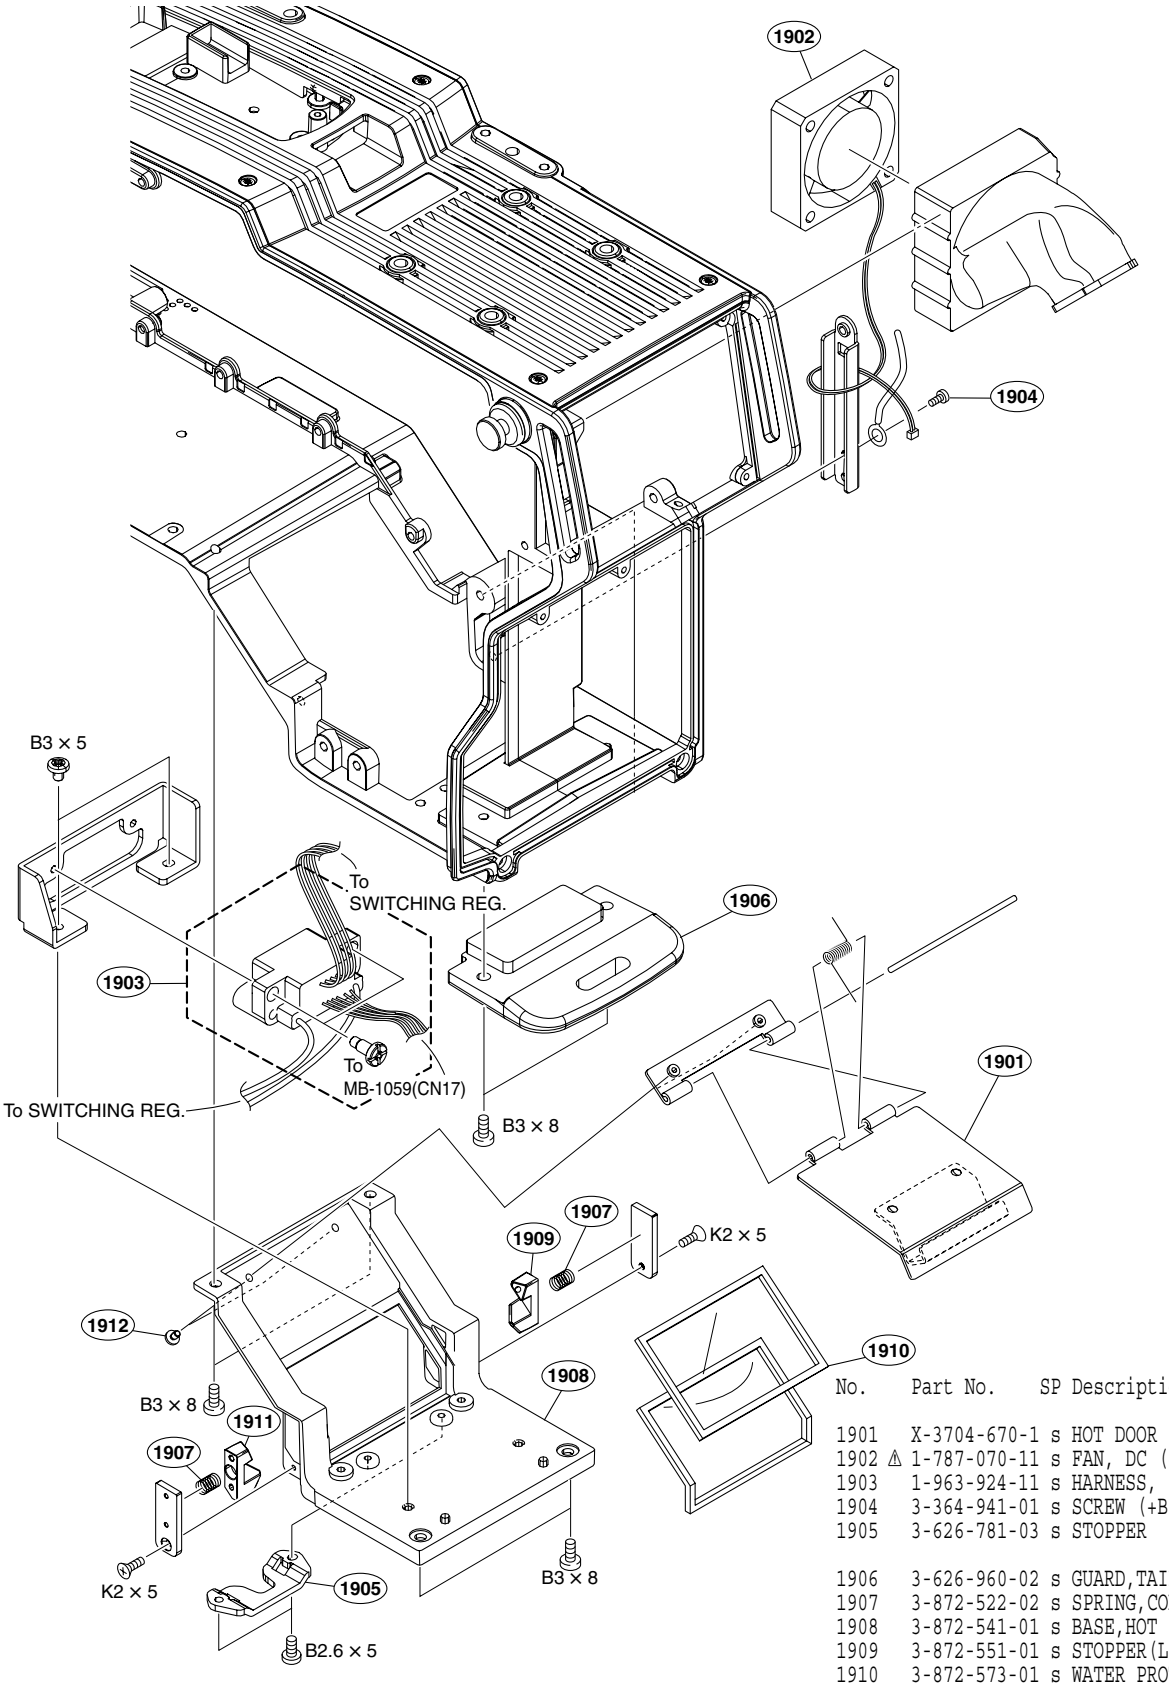
| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| 1pc | A-1101-926-A | s | MOUNTED CIRCUIT BOARD, AT-163 |
| 3pcs | 3-729-061-01 | s | SCREW (M2X4.5) (TYPE 1)(STEEL) |
| 2pcs | 4-654-273-02 | s | ACE (M2), LOCK |
| C1 | 1-127-692-91 | s | CAP, CHIP CERAMIC 10MF B 3216 |
| C2 | 1-127-692-91 | s | CAP, CHIP CERAMIC 10MF B 3216 |
| C3 | 1-127-692-91 | s | CAP, CHIP CERAMIC 10MF B 3216 |
| C4 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C6 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C7 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C8 | 1-127-692-91 | s | CAP, CHIP CERAMIC 10MF B 3216 |
| C10 | 1-115-339-11 | s | CAPACITOR,CERAMIC 0.1MF/50V |
| C12 | 1-115-339-11 | s | CAPACITOR,CERAMIC 0.1MF/50V |
| C13 | 1-119-923-11 | s | CAPACITOR,CHIP CERAMIC 0.047MF |
| C15 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C16 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C17 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C18 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C22 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C24 | 1-119-923-11 | s | CAPACITOR,CHIP CERAMIC 0.047MF |
| C25 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C26 | 1-107-819-11 | s | CAP,CERAMIC 22000PF/16V(1005) |
| C27 | 1-164-936-11 | s | CAPACITOR,CHIP CERAMIC 680PF |
| C28 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C29 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C30 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C31 | 1-128-451-11 | s | CAPACITOR ELECT 22MF/16V(105C) |
| C32 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C33 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C34 | 1-127-692-91 | s | CAP, CHIP CERAMIC 10MF B 3216 |
| C35 | 1-128-451-11 | s | CAPACITOR ELECT 22MF/16V(105C) |
| C36 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C102 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C103 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C104 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C105 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C106 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C107 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C108 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C109 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C110 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C111 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C112 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C113 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C114 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C115 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C116 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C117 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C119 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C120 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C121 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C122 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C123 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C124 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C125 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C126 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C127 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |

(AT-163 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C128 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C129 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C130 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C131 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C132 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C133 | 1-164-935-11 | s | CAPACITOR,CHIP CERAMIC 470PF |
| C134 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C135 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C136 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C137 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C138 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C139 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C140 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C141 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C142 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C143 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C144 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C145 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C146 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C147 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C148 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C149 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C150 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C151 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C152 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C153 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C154 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C155 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C156 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C157 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C158 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C159 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C160 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C161 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C162 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C163 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C165 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C166 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C167 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C168 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C169 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C170 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C171 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C172 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C173 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C174 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C175 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C176 | 1-164-858-11 | s | CAPACITOR,CERAMIC 22PF/50V |
| *2 C177 | 1-125-777-81 | s | CERAMIC CHIP 0.1UF 10.00% 10V |
| C301 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C302 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C303 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C304 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C305 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C306 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C307 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C308 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C309 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C310 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |

(AT-163 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C311 | 1-164-850-11 | s | CAPACITOR,CHIP CERAMIC 10PF/50 |
| C312 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C313 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C314 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C315 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C316 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C317 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C318 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C319 | 1-164-858-11 | s | CAPACITOR,CERAMIC 22PF/50V |
| C320 | 1-164-850-11 | s | CAPACITOR,CHIP CERAMIC 10PF/50 |
| C321 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C401 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C402 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C403 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C404 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C406 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C407 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C408 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C409 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C410 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C411 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C412 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C413 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C414 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C415 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C416 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C417 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C418 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C419 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C420 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C421 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C422 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C423 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C425 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C426 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C427 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C428 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C429 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C430 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C431 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C432 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C433 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C434 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C435 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C436 *2 | 1-125-777-81 | s | CERAMIC CHIP 0.1UF 10.00% 10V |
| C437 *2 | 1-125-777-81 | s | CERAMIC CHIP 0.1UF 10.00% 10V |
| C601 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C602 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C603 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C604 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C605 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C606 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C607 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C608 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C609 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C610 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C611 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C612 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C613 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |

(AT-163 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C614 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C615 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C616 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C617 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C618 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C619 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C620 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C621 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C622 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C623 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C624 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C625 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C626 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C627 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C628 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C629 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C630 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C631 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C632 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C634 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C636 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C637 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C638 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C639 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C640 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C641 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C642 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C643 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C644 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C645 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C646 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C647 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| CN102 | 1-793-093-11 | o | CONNECTOR, BOARD TO BOARD 60P |
| CN401 | 1-764-093-21 | o | PIN, CONNECTOR (PC BOARD) 8P |
| D1 | 8-719-017-03 | s | DIODE 02DZ4.7-TPH3 |
| D2 | 8-719-017-03 | s | DIODE 02DZ4.7-TPH3 |
| D3 | 8-719-017-03 | s | DIODE 02DZ4.7-TPH3 |
| D102 | 8-719-820-41 | s | DIODE 1SS302 |
| D103 | 8-719-820-41 | s | DIODE 1SS302 |
| D104 | 8-719-820-41 | s | DIODE 1SS302 |
| D105 | 8-719-820-41 | s | DIODE 1SS302 |
| D401 | 8-719-820-41 | s | DIODE 1SS302 |
| D402 | 8-719-820-41 | s | DIODE 1SS302 |
| D403 | 8-719-820-41 | s | DIODE 1SS302 |
| D404 | 8-719-820-41 | s | DIODE 1SS302 |
| D601 | 8-719-820-41 | s | DIODE 1SS302 |
| D602 | 8-719-820-41 | s | DIODE 1SS302 |
| D603 | 8-719-820-41 | s | DIODE 1SS302 |
| D604 | 8-719-820-41 | s | DIODE 1SS302 |
| D605 | 8-719-820-41 | s | DIODE 1SS302 |
| D606 | 8-719-820-41 | s | DIODE 1SS302 |
| D607 | 8-719-820-41 | s | DIODE 1SS302 |
| D608 | 8-719-820-41 | s | DIODE 1SS302 |
| E1 | 1-535-877-22 | s | CHIP,CHECKER (TEST POINT) |
| FB1 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB2 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB101 | 1-469-094-21 | s | FERRITE, EMI (SMD) |

(AT-163 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| FB102 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB103 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB104 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB105 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB106 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB301 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB302 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB401 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB402 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB403 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB404 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB405 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB406 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB407 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| IC1 | 6-701-572-01 | s | IC TPS54610PWPR |
| IC2 | 6-704-976-01 | s | IC ADR381ART-REEL7 |
| IC3 | 8-759-327-01 | s | IC NJM062V-TE2 |
| IC101 | 8-759-656-54 | s | IC TC7WH14FK(TE85R) |
| IC102 *1 | 8-759-675-53 | s | IC TC7WH32FK(TE85R) |
| IC103 | 8-759-564-49 | s | IC TC7W53FU-TE12R |
| IC104 | 8-759-564-49 | s | IC TC7W53FU-TE12R |
| IC105 | 8-759-546-74 | s | IC TC7WH157FU(TE12R) |
| IC106 | 8-759-564-49 | s | IC TC7W53FU-TE12R |
| IC107 | 8-759-564-49 | s | IC TC7W53FU-TE12R |
| IC108 | 8-759-669-42 | s | IC SN74LVC138APWR-12 |
| IC109 | 6-703-421-01 | s | IC HD64F7145F50 |
| IC110 | 8-759-669-42 | s | IC SN74LVC138APWR-12 |
| IC111 | 8-759-447-77 | s | IC TC7WH74FU (TE12R) |
| IC112 | 8-759-392-77 | s | IC SN74LVC245APW (E20) |
| IC113 | 8-759-447-77 | s | IC TC7WH74FU (TE12R) |
| IC114 | 8-759-546-74 | s | IC TC7WH157FU(TE12R) |
| IC115 | 8-759-546-74 | s | IC TC7WH157FU(TE12R) |
| IC116 | 8-759-598-44 | s | IC TC7WH08FK(TE85R) |
| IC117 | 8-759-363-26 | s | IC RN5VD28AA-TL |
| IC118 | 6-707-760-01 | s | IC MBM29DL161TE90TN |
| IC120 | 6-704-099-01 | f | IC TC7WZ08FK(TE85R) |
| IC121 | 8-759-327-01 | s | IC NJM062V-TE2 |
| IC122 | 6-707-760-01 | s | IC MBM29DL161TE90TN |
| IC123 | 8-759-392-77 | s | IC SN74LVC245APW (E20) |
| IC124 | 8-759-540-36 | s | IC SN74LVC157APWR |
| IC125 | 8-759-669-42 | s | IC SN74LVC138APWR-12 |
| IC126 | 6-704-099-01 | f | IC TC7WZ08FK(TE85R) |
| IC127 | 6-707-242-01 | s | IC R1LV0416CSB-5SI |
| IC128 | 6-707-242-01 | s | IC R1LV0416CSB-5SI |
| IC129 | 8-759-598-43 | s | IC TC7WH04FK(TE85R) |
| IC130 | 8-759-598-43 | s | IC TC7WH04FK(TE85R) |
| IC131 | 6-706-489-01 | s | IC TC7SH32FU(T5RSOYJF) |
| IC132 | 8-759-523-94 | s | IC TC74VHC32FT(EL) |
| IC133 | 6-707-947-01 | s | IC MB85R256PFTN-G-BNDE1 |
| IC134 | 8-759-675-53 | s | IC TC7WH32FK-TE85R |
| IC135 | 8-759-675-53 | s | IC TC7WH32FK-TE85R |
| IC136 | 8-759-598-44 | s | IC TC7WH08FK(TE85R) |
| IC137 | 8-759-598-44 | s | IC TC7WH08FK(TE85R) |
| IC138 | 8-759-675-53 | s | IC TC7WH32FK-TE85R |
| IC139 | 6-707-947-01 | s | IC MB85R256PFTN-G-BNDE1 |
| IC140 | 8-759-669-44 | s | IC SN74LVC74APWR-12 |
| IC141 | 6-707-947-01 | s | IC MB85R256PFTN-G-BNDE1 |
| IC142 | 6-707-947-01 | s | IC MB85R256PFTN-G-BNDE1 |
| IC143 | 8-759-584-32 | s | IC MB86189PFV-G-BND-ER |

(AT-163 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| IC144 | 8-759-523-84 | s | IC TC74VHC14FT (EL) |
| IC145 | 6-706-484-01 | s | IC TC7SH04FU(T5RSOYJF) |
| IC146 | 8-759-592-10 | s | IC TC7WH00FU-TE12R |
| IC147 *2 | 6-706-476-01 | s | IC TC7SET04FU(T5RSOJF) |
| IC148 *2 | 6-706-481-01 | s | IC TC7SET32FU(T5RSOJF) |
| IC301 | 8-759-594-17 | o | IC CXD9093R |
| IC302 | 6-706-487-01 | s | IC TC7SH08FU(T5RSOYJF) |
| IC303 | 6-706-489-01 | s | IC TC7SH32FU(T5RSOYJF) |
| IC304 | 8-759-546-74 | s | IC TC7WH157FU(TE12R) |
| IC305 | 8-759-598-43 | s | IC TC7WH04FK(TE85R) |
| IC306 | 8-759-092-81 | s | IC SN75158PS |
| IC307 | 6-706-487-01 | s | IC TC7SH08FU(T5RSOYJF) |
| IC308 | 6-706-478-01 | s | IC TC7SET08FU(T5RSOJF) |
| IC401 | 8-759-363-26 | s | IC RN5VD28AA-TL |
| IC402 | 6-706-487-01 | s | IC TC7SH08FU(T5RSOYJF) |
| IC403 | 6-700-387-01 | s | IC EPC2LC20-TP |
| IC406 | 8-759-688-12 | s | IC TC74VHCT125AFT(EL) |
| IC407 | 8-759-598-44 | s | IC TC7WH08FK(TE85R) |
| IC408 | 8-759-491-50 | s | IC TC74VHCT244AFT(EL) |
| IC409 *2 | 6-706-476-01 | s | IC TC7SET04FU(T5RSOJF) |
| IC410 *2 | 6-706-476-01 | s | IC TC7SET04FU(T5RSOJF) |
| IC601 | 6-706-476-01 | s | IC TC7SET04FU(T5RSOJF) |
| IC602 | 8-759-833-99 | s | IC MC74HC4052ADTR2 |
| IC603 | 8-759-833-99 | s | IC MC74HC4052ADTR2 |
| IC604 | 8-759-327-01 | s | IC NJM062V-TE2 |
| IC605 | 8-759-327-01 | s | IC NJM062V-TE2 |
| IC606 | 8-759-327-01 | s | IC NJM062V-TE2 |
| IC607 | 8-759-327-01 | s | IC NJM062V-TE2 |
| IC608 | 8-759-669-66 | s | IC TLC272CPWR |
| IC609 | 8-759-327-01 | s | IC NJM062V-TE2 |
| IC610 | 8-759-327-01 | s | IC NJM062V-TE2 |
| IC611 | 6-708-346-01 | s | IC DAC7512N |
| IC612 | 8-759-685-33 | s | IC BU2500FV-E2 |
| L1 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L2 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L3 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L4 | 1-416-344-11 | s | COIL, CHOKE 10UH |
| L5 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L101 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L102 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L103 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L104 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L105 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L301 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L401 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |
| L402 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |
| L403 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |
| L601 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |
| L602 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |
| L603 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |
| PH301 | 8-749-014-35 | s | IC HCPL-0630-500 |
| Q1 | 8-729-807-51 | s | TRANSISTOR 2SD1623-S |
| Q2 | 8-729-230-27 | s | TRANSISTOR 2SA1213Y-TE12L |
| Q3 | 8-729-230-27 | s | TRANSISTOR 2SA1213Y-TE12L |
| Q101 | 8-729-927-99 | s | TRANSISTOR 2SC4617R |
| Q102 | 8-729-928-19 | s | TRANSISTOR 2SA1774R |
| Q103 | 8-729-927-99 | s | TRANSISTOR 2SC4617R |

(AT-163 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| Q104 | 8-729-928-81 | s | TRANSISTOR DTC144EE |
| Q105 | 8-729-230-27 | s | TRANSISTOR 2SA1213Y-TE12L |
| Q401 | 8-729-928-19 | s | TRANSISTOR 2SA1774R |
| Q402 | 8-729-928-81 | s | TRANSISTOR DTC144EE |
| Q404 | 8-729-928-81 | s | TRANSISTOR DTC144EE |
| Q405 | 8-729-928-81 | s | TRANSISTOR DTC144EE |
| Q406 | 8-729-928-81 | s | TRANSISTOR DTC144EE |
| Q407 | 8-729-928-81 | s | TRANSISTOR DTC144EE |
| Q408 | 8-729-928-27 | s | TRANSISTOR DTA144EE |
| Q409 | 8-729-928-27 | s | TRANSISTOR DTA144EE |
| Q410 | 8-729-928-27 | s | TRANSISTOR DTA144EE |
| Q411 | 8-729-928-27 | s | TRANSISTOR DTA144EE |
| Q412 *1 | 8-729-928-28 | s | TRANSISTOR DTA144EE-TL |
| Q413 *1 | 8-729-928-28 | s | TRANSISTOR DTA144EE-TL |
| Q414 | 8-729-928-27 | s | TRANSISTOR DTA144EE |
| Q415 | 8-729-928-27 | s | TRANSISTOR DTA144EE |
| Q416 | 8-729-928-27 | s | TRANSISTOR DTA144EE |
| R1 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R2 | 1-208-699-11 | s | RESISTOR,CHIP 4.7K 1/16W(1005) |
| R3 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R4 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R5 | 1-220-221-11 | s | RESISTOR CHIP 100 1/2W (4532) |
| R6 | 1-220-221-11 | s | RESISTOR CHIP 100 1/2W (4532) |
| R7 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R8 | 1-208-699-11 | s | RESISTOR,CHIP 4.7K 1/16W(1005) |
| R9 | 1-220-221-11 | s | RESISTOR CHIP 100 1/2W (4532) |
| R11 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R12 | 1-208-931-11 | s | RESISTOR, CHIP 68K (1005) |
| R14 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R16 | 1-208-711-11 | s | RESISTOR CHIP 15K 1/16W (1005) |
| R17 | 1-208-923-11 | s | RESISTOR, CHIP 33K (1005) |
| R18 | 1-208-923-11 | s | RESISTOR, CHIP 33K (1005) |
| R19 | 1-208-923-11 | s | RESISTOR, CHIP 33K (1005) |
| R20 | 1-208-923-11 | s | RESISTOR, CHIP 33K (1005) |
| R22 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R23 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R24 | 1-208-703-11 | s | RESISTOR,CHIP 6.8K 1/16W(1005) |
| R25 | 1-208-923-11 | s | RESISTOR, CHIP 33K (1005) |
| R26 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R27 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R28 | 1-208-687-11 | s | RESISTOR CHIP 1.5K 1/16W (1005 |
| R29 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R30 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R31 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R32 | 1-208-695-11 | s | RESISTOR CHIP 3.3K 1/16W(1005) |
| R33 | 1-208-679-11 | s | RESISTOR CHIP 680 1/16W (1005) |
| R101 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R102 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R103 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R104 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R105 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R106 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R107 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R108 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R109 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R110 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R111 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R112 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |

(AT-163 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R113 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R114 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R115 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R116 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R117 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R118 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R119 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R120 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R121 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R122 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R123 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R124 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R125 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R126 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R127 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R128 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R129 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R130 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R131 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R132 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R133 | 1-208-675-11 | s | RESISTOR CHIP 470 1/16W (1005) |
| R134 | 1-208-699-11 | s | RESISTOR,CHIP 4.7K 1/16W(1005) |
| R135 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R136 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R137 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R138 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R139 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R140 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R141 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R142 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R143 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R144 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R145 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R146 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R147 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R148 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R149 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R150 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R151 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R152 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R153 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R154 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R155 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R156 | 1-208-687-11 | s | RESISTOR CHIP 1.5K 1/16W (1005 |
| R157 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R158 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R160 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R161 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R162 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R163 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R164 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R165 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R167 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R168 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R169 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R170 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R171 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R172 | 1-218-989-11 | s | RESISTOR,CHIP 1M 1/16W (1005) |
| R173 | 1-208-699-11 | s | RESISTOR,CHIP 4.7K 1/16W(1005) |

(AT-163 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R174 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R175 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R176 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R177 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R178 | 1-208-695-11 | s | RESISTOR CHIP 3.3K 1/16W(1005) |
| R179 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R180 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R181 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R182 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R183 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R186 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R187 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R191 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R192 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R193 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R194 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R195 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R196 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R197 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R198 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R199 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R200 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R201 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R202 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R203 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R204 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R205 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R206 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R207 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R209 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R210 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R212 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R213 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R214 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R215 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R216 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R217 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R218 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R219 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R220 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R221 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R225 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R226 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R227 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R228 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R231 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R232 | 1-208-691-11 | s | RESISTOR CHIP 2.2K 1/16W(1005) |
| R234 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R236 | 1-208-643-11 | s | RESISTOR CHIP 22 1/16W (1005) |
| R237 | 1-208-643-11 | s | RESISTOR CHIP 22 1/16W (1005) |
| R238 | 1-208-643-11 | s | RESISTOR CHIP 22 1/16W (1005) |
| R240 | 1-208-643-11 | s | RESISTOR CHIP 22 1/16W (1005) |
| R241 | 1-208-643-11 | s | RESISTOR CHIP 22 1/16W (1005) |
| R242 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R243 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R244 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R245 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R254 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R255 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |

(AT-163 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R301 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R302 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R303 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R304 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R305 | 1-208-643-11 | s | RESISTOR CHIP 22 1/16W (1005) |
| R306 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R307 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R308 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R309 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R310 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R311 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R312 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R313 | 1-208-703-11 | s | RESISTOR,CHIP 6.8K 1/16W(1005) |
| R314 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R315 | 1-208-703-11 | s | RESISTOR,CHIP 6.8K 1/16W(1005) |
| R316 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R317 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R318 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R319 | 1-208-647-11 | s | RESISTOR CHIP 33 1/16W (1005) |
| R320 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R321 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R322 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R323 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R401 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R402 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R403 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R404 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R405 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R406 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R407 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R408 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R411 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R412 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R413 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R415 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R416 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R417 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R419 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R420 | 1-208-699-11 | s | RESISTOR,CHIP 4.7K 1/16W(1005) |
| R421 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R422 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R423 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R424 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R426 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R428 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R429 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R430 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R431 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R432 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R433 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R434 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R435 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R437 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R438 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R439 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R442 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R443 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R448 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R450 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |

(AT-163 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R451 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R452 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R461 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R462 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R468 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R469 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R479 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R483 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R485 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R486 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R487 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R497 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R498 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R509 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R518 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R520 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R532 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R533 | 1-208-687-11 | s | RESISTOR CHIP 1.5K 1/16W (1005 |
| R534 | 1-208-687-11 | s | RESISTOR CHIP 1.5K 1/16W (1005 |
| R601 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R602 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R603 | 1-208-711-11 | s | RESISTOR CHIP 15K 1/16W (1005) |
| R604 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R605 | 1-208-691-11 | s | RESISTOR CHIP 2.2K 1/16W(1005) |
| R606 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R607 | 1-208-703-11 | s | RESISTOR,CHIP 6.8K 1/16W(1005) |
| R608 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R609 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R610 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R611 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R612 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R613 | 1-208-923-11 | s | RESISTOR, CHIP 33K (1005) |
| R614 | 1-208-679-11 | s | RESISTOR CHIP 680 1/16W (1005) |
| R615 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R616 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R617 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R618 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R619 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R620 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R621 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R622 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R623 | 1-208-923-11 | s | RESISTOR, CHIP 33K (1005) |
| R624 | 1-208-695-11 | s | RESISTOR CHIP 3.3K 1/16W(1005) |
| R625 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R626 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R627 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R628 | 1-208-711-11 | s | RESISTOR CHIP 15K 1/16W (1005) |
| R630 | 1-208-931-11 | s | RESISTOR, CHIP 68K (1005) |
| R631 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R632 | 1-208-923-11 | s | RESISTOR, CHIP 33K (1005) |
| R633 | 1-208-923-11 | s | RESISTOR, CHIP 33K (1005) |
| R634 | 1-208-711-11 | s | RESISTOR CHIP 15K 1/16W (1005) |
| R635 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R636 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R637 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R638 | 1-208-711-11 | s | RESISTOR CHIP 15K 1/16W (1005) |
| R639 | 1-208-699-11 | s | RESISTOR,CHIP 4.7K 1/16W(1005) |
| R640 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R641 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |

(AT-163 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R645 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R646 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R647 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R648 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R649 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R650 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R651 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R652 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R653 | 1-208-923-11 | s | RESISTOR, CHIP 33K (1005) |
| R654 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R655 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R656 | 1-208-711-11 | s | RESISTOR CHIP 15K 1/16W (1005) |
| R657 | 1-208-923-11 | s | RESISTOR, CHIP 33K (1005) |
| R658 | 1-208-695-11 | s | RESISTOR CHIP 3.3K 1/16W(1005) |
| R659 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R660 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R661 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R662 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R665 | 1-208-711-11 | s | RESISTOR CHIP 15K 1/16W (1005) |
| R666 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R667 | 1-208-711-11 | s | RESISTOR CHIP 15K 1/16W (1005) |
| R668 | 1-208-695-11 | s | RESISTOR CHIP 3.3K 1/16W(1005) |
| R669 | 1-208-923-11 | s | RESISTOR, CHIP 33K (1005) |
| R670 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R671 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R672 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| RB103 | 1-234-380-11 | s | RESISTOR,NETWORK 47KX4 (1005) |
| RB104 | 1-234-371-11 | s | RES, NETWORK 47X4 (1005) |
| RB105 | 1-234-381-21 | s | RES, NETWORK 100KX4 (1005) |
| RB106 | 1-234-381-21 | s | RES, NETWORK 100KX4 (1005) |
| RB107 | 1-234-371-11 | s | RES, NETWORK 47X4 (1005) |
| RB108 | 1-234-371-11 | s | RES, NETWORK 47X4 (1005) |
| RB109 | 1-234-371-11 | s | RES, NETWORK 47X4 (1005) |
| RB110 | 1-234-371-11 | s | RES, NETWORK 47X4 (1005) |
| RB111 | 1-234-381-21 | s | RES, NETWORK 100KX4 (1005) |
| RB112 | 1-234-381-21 | s | RES, NETWORK 100KX4 (1005) |
| RB113 | 1-234-381-21 | s | RES, NETWORK 100KX4 (1005) |
| RB114 | 1-234-381-21 | s | RES, NETWORK 100KX4 (1005) |
| RB115 | 1-234-381-21 | s | RES, NETWORK 100KX4 (1005) |
| RB116 | 1-234-381-21 | s | RES, NETWORK 100KX4 (1005) |
| RB117 | 1-234-381-21 | s | RES, NETWORK 100KX4 (1005) |
| RB118 | 1-234-381-21 | s | RES, NETWORK 100KX4 (1005) |
| RB119 | 1-234-371-11 | s | RES, NETWORK 47X4 (1005) |
| RB120 | 1-234-381-21 | s | RES, NETWORK 100KX4 (1005) |
| RB121 | 1-234-381-21 | s | RES, NETWORK 100KX4 (1005) |
| RB122 | 1-234-381-21 | s | RES, NETWORK 100KX4 (1005) |
| RB123 | 1-234-381-21 | s | RES, NETWORK 100KX4 (1005) |
| RB124 | 1-234-381-21 | s | RES, NETWORK 100KX4 (1005) |
| RB125 | 1-234-381-21 | s | RES, NETWORK 100KX4 (1005) |
| RB401 | 1-234-378-11 | s | RES, NETWORK 10KX4 (1005) |
| RB402 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB403 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB404 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB405 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB406 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB407 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB408 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB409 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |

(AT-163 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| RB410 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB411 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB412 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB413 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB414 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB415 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB416 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB417 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB601 | 1-234-380-11 | s | RESISTOR,NETWORK 47KX4 (1005) |
| RB602 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB603 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB604 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| S1 | 1-692-270-41 | s | SWITCH, SLIDE |
| THP1 ⚠ | 1-804-458-21 | s | THERMISTOR, POSITIVE |
| THP2 ⚠ | 1-804-458-21 | s | THERMISTOR, POSITIVE |
| THP3 ⚠ | 1-804-616-11 | s | THERMISTOR, POSITIVE |
| THP101 ⚠ | 1-804-458-21 | s | THERMISTOR, POSITIVE |
| X101 | 1-795-561-11 | s | VIBRATOR, CERAMIC |
| X301 | 1-795-177-21 | s | OSCILLATOR, CRYSTAL |

---
AT-166 BOARD
---

*1: [Board No. suffix 11]
*2: [Board No. suffix 21-]

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| 1pc | A-1159-990-A | s | MOUNTED CIRCUIT BOARD, AT-166G (GOLD) |
| | A-1126-980-A | s | MOUNTED CIRCUIT BOARD, AT-166 (SILVER) |
| C3 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C4 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C5 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C14 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C15 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C18 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C19 | 1-128-451-11 | s | CAPACITOR ELECT 22MF/16V(105C) |
| C21 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C22 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C23 | 1-128-451-11 | s | CAPACITOR ELECT 22MF/16V(105C) |
| C24 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C31 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C33 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C37 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C38 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C39 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C43 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C44 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C45 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C46 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C47 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C48 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C49 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C50 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C51 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C52 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C53 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C54 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C55 | 1-164-850-11 | s | CAPACITOR,CHIP CERAMIC 10PF/50 |
| C56 | 1-164-850-11 | s | CAPACITOR,CHIP CERAMIC 10PF/50 |
| C57 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C58 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C60 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C61 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C62 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C63 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C64 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C65 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C66 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C67 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C68 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C69 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C70 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C71 | 1-164-858-11 | s | CAPACITOR,CERAMIC 22PF/50V |
| C72 | 1-164-858-11 | s | CAPACITOR,CERAMIC 22PF/50V |
| C73 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| CN1 | 1-770-621-21 | s | PIN, CONNECTOR 4P |
| CN2 | 1-580-057-11 | s | PIN,CONNECTOR 4P |
| CN3 *1 | 1-770-627-21 | s | PIN, CONNECTOR 10P |
| CN5 | 1-770-625-21 | s | PIN, CONNECTOR 8P |
| CN6 | 1-793-141-11 | o | PIN, CONNECTOR (PC BOARD) |

(AT-166 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| CN7 | 1-784-625-31 | s | CONNECTOR, FFC/FPC(ZIF) AN 30P (GOLD) |
| | 1-784-625-11 | o | CONNECTOR, FFC (ZIF) 30P (SILVER) |
| CN8 | 1-784-625-31 | s | CONNECTOR, FFC/FPC(ZIF) AN 30P (GOLD) |
| | 1-784-625-11 | o | CONNECTOR, FFC (ZIF) 30P (SILVER) |
| D1 | 8-719-017-03 | s | DIODE 02DZ4.7-TPH3 |
| D3 | 8-719-820-41 | s | DIODE 1SS302 |
| D4 | 8-719-820-41 | s | DIODE 1SS302 |
| D8 | 8-719-820-41 | s | DIODE 1SS302 |
| D9 | 8-719-820-41 | s | DIODE 1SS302 |
| D10 | 8-719-820-41 | s | DIODE 1SS302 |
| D11 | 8-719-820-41 | s | DIODE 1SS302 |
| D12 | 8-719-820-41 | s | DIODE 1SS302 |
| D13 | 8-719-820-41 | s | DIODE 1SS302 |
| D14 | 8-719-820-41 | s | DIODE 1SS302 |
| D15 | 8-719-820-41 | s | DIODE 1SS302 |
| D16 | 8-719-820-41 | s | DIODE 1SS302 |
| E1 | 1-535-877-22 | s | CHIP,CHECKER (TEST POINT) |
| FB1 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB2 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB5 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB6 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB7 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB8 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FL6 | 1-239-896-12 | s | FILTER, EMI (SMD) |
| FL7 | 1-239-896-12 | s | FILTER, EMI (SMD) |
| FL8 | 1-239-896-12 | s | FILTER, EMI (SMD) |
| FL10 | 1-239-896-12 | s | FILTER, EMI (SMD) |
| FL11 | 1-239-896-12 | s | FILTER, EMI (SMD) |
| FL12 | 1-239-896-12 | s | FILTER, EMI (SMD) |
| FL13 | 1-239-896-12 | s | FILTER, EMI (SMD) |
| FL14 | 1-239-896-12 | s | FILTER, EMI (SMD) |
| IC1 | 6-704-976-01 | s | IC ADR381ART-REEL7 |
| IC4 | 8-759-327-01 | s | IC NJM062V-TE2 |
| IC6 | 6-702-624-01 | s | IC HD64F2377VFQ33V |
| IC7 | 8-759-363-26 | s | IC RN5VD28AA-TL |
| IC8 | 8-759-491-50 | s | IC TC74VHCT244AFT(EL) |
| IC10 | 8-759-491-50 | s | IC TC74VHCT244AFT(EL) |
| IC12 | 8-759-598-44 | s | IC TC7WH08FK(TE85R) |
| IC13 | 8-759-598-44 | s | IC TC7WH08FK(TE85R) |
| IC16 | 8-759-592-10 | s | IC TC7WH00FU-TE12R |
| IC18 | 8-759-598-44 | s | IC TC7WH08FK(TE85R) |
| IC20 | 8-759-523-84 | s | IC TC74VHC14FT (EL) |
| IC21 | 8-759-491-50 | s | IC TC74VHCT244AFT(EL) |
| IC22 | 8-759-491-50 | s | IC TC74VHCT244AFT(EL) |
| IC23 | 8-759-491-50 | s | IC TC74VHCT244AFT(EL) |
| IC24 | 8-759-491-50 | s | IC TC74VHCT244AFT(EL) |
| IC25 *1 | 6-704-912-01 | s | IC CAT24WC256XI-TE13 |
| L1 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L2 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L4 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |
| L5 | 1-424-700-21 | s | COIL, CHOKE (SMD) 100UH |
| Q1 | 8-729-230-27 | s | TRANSISTOR 2SA1213Y-TE12L |

(AT-166 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| Q2 | 8-729-230-27 | s | TRANSISTOR 2SA1213Y-TE12L |
| Q4 *1 | 8-729-928-81 | s | TRANSISTOR DTC144EE-TL |
| R6 | 1-220-221-11 | s | RESISTOR CHIP 100 1/2W (4532) |
| R10 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R11 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R15 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R16 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R17 | 1-208-703-11 | s | RESISTOR,CHIP 6.8K 1/16W(1005) |
| R18 | 1-208-699-11 | s | RESISTOR,CHIP 4.7K 1/16W(1005) |
| R19 | 1-208-711-11 | s | RESISTOR CHIP 15K 1/16W (1005) |
| R21 | 1-208-923-11 | s | RESISTOR, CHIP 33K (1005) |
| R22 | 1-208-923-11 | s | RESISTOR, CHIP 33K (1005) |
| R26 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R27 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R28 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R29 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R30 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R31 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R32 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R34 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R35 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R37 | 1-208-923-11 | s | RESISTOR, CHIP 33K (1005) |
| R38 | 1-208-923-11 | s | RESISTOR, CHIP 33K (1005) |
| R39 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R41 | 1-208-687-11 | s | RESISTOR CHIP 1.5K 1/16W (1005 |
| R45 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R46 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R51 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R53 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R54 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R63 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R64 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R65 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R66 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R72 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R73 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R74 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R75 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R76 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R81 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R82 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R83 | 1-208-687-11 | s | RESISTOR CHIP 1.5K 1/16W (1005 |
| R84 | 1-208-687-11 | s | RESISTOR CHIP 1.5K 1/16W (1005 |
| R85 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R86 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R95 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R98 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R99 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R100 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R101 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R102 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R103 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R104 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R106 *1 | 1-208-935-11 | s | METAL CHIP 100K 0.5% 1/16W |
| R107 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R108 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R109 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |

(AT-166 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R110 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R111 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R112 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R113 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R114 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R115 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R116 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R117 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R118 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R119 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R120 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R121 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R122 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R123 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R124 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R125 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R126 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R127 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R128 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R129 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R130 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R131 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R132 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R133 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R134 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R135 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R136 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R137 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R138 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R139 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R140 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R141 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R142 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R143 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R144 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R145 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R146 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R147 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R148 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R149 | 1-208-699-11 | s | RESISTOR,CHIP 4.7K 1/16W(1005) |
| R150 | 1-208-699-11 | s | RESISTOR,CHIP 4.7K 1/16W(1005) |
| R151 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R152 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R153 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R154 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R155 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R156 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R157 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R158 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R159 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R160 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R161 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| *2 R162 | 1-208-683-11 | s | METAL CHIP 1K 0.5% 1/16W |
| *2 R163 | 1-218-990-81 | s | SHORT CHIP 0 |
| RB1 | 1-234-380-11 | s | RESISTOR,NETWORK 47KX4 (1005) |
| RB2 | 1-234-380-11 | s | RESISTOR,NETWORK 47KX4 (1005) |
| RB3 | 1-234-380-11 | s | RESISTOR,NETWORK 47KX4 (1005) |
| RB5 | 1-234-380-11 | s | RESISTOR,NETWORK 47KX4 (1005) |
| RB7 | 1-234-380-11 | s | RESISTOR,NETWORK 47KX4 (1005) |

(AT-166 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| RB8 | 1-234-381-21 | s | RES, NETWORK 100KX4 (1005) |
| RB9 | 1-234-381-21 | s | RES, NETWORK 100KX4 (1005) |
| RB10 | 1-234-375-21 | s | RES, NETWORK 1KX4 (1005) |
| RB11 | 1-234-375-21 | s | RES, NETWORK 1KX4 (1005) |
| RB12 | 1-234-380-11 | s | RESISTOR,NETWORK 47KX4 (1005) |
| RB13 | 1-234-380-11 | s | RESISTOR,NETWORK 47KX4 (1005) |
| RB14 | 1-234-380-11 | s | RESISTOR,NETWORK 47KX4 (1005) |
| RB15 | 1-234-380-11 | s | RESISTOR,NETWORK 47KX4 (1005) |
| RB16 | 1-234-380-11 | s | RESISTOR,NETWORK 47KX4 (1005) |
| RB17 | 1-234-380-11 | s | RESISTOR,NETWORK 47KX4 (1005) |
| RB18 | 1-234-380-11 | s | RESISTOR,NETWORK 47KX4 (1005) |
| RB19 | 1-234-380-11 | s | RESISTOR,NETWORK 47KX4 (1005) |
| RB20 | 1-234-380-11 | s | RESISTOR,NETWORK 47KX4 (1005) |
| RB21 | 1-234-380-11 | s | RESISTOR,NETWORK 47KX4 (1005) |
| RB22 | 1-234-380-11 | s | RESISTOR,NETWORK 47KX4 (1005) |
| RB23 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB24 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB25 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB26 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB27 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB28 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB29 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB30 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB31 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB32 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB33 | 1-234-380-11 | s | RESISTOR,NETWORK 47KX4 (1005) |
| S1 | 1-692-270-41 | s | SWITCH, SLIDE |
| THP1 | ⚠ 1-804-458-21 | s | THERMISTOR, POSITIVE |
| THP2 | ⚠ 1-804-616-11 | s | THERMISTOR, POSITIVE |
| X1 | 1-813-287-11 | s | VIBRATOR, CRYSTAL |

AU-298 BOARD (SUFFIX 12)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| 1pc | A-1101-924-A | s | MOUNTED CIRCUIT BOARD, AU-298 |
| 3pcs | 3-729-061-01 | s | SCREW (M2X4.5) (TYPE 1)(STEEL) |
| 2pcs | 4-654-273-02 | s | ACE (M2), LOCK |
| C1 | 1-127-692-91 | s | CAP, CHIP CERAMIC 10MF B 3216 |
| C2 | 1-127-692-91 | s | CAP, CHIP CERAMIC 10MF B 3216 |
| C3 | 1-126-400-11 | s | CAPACITOR ELECT 22MF/35V(CHIP) |
| C4 | 1-126-400-11 | s | CAPACITOR ELECT 22MF/35V(CHIP) |
| C5 | 1-100-352-91 | s | CAP, CHIP CERAMIC 1MF B (1608) |
| C6 | 1-100-352-91 | s | CAP, CHIP CERAMIC 1MF B (1608) |
| C7 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C8 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C10 | 1-100-352-91 | s | CAP, CHIP CERAMIC 1MF B (1608) |
| C11 | 1-100-352-91 | s | CAP, CHIP CERAMIC 1MF B (1608) |
| C13 | 1-100-352-91 | s | CAP, CHIP CERAMIC 1MF B (1608) |
| C14 | 1-100-352-91 | s | CAP, CHIP CERAMIC 1MF B (1608) |
| C15 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C16 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C17 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C19 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C20 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C21 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C24 | 1-100-620-91 | s | CAPACITOR, CHIP 47MF(3225) |
| C25 | 1-100-620-91 | s | CAPACITOR, CHIP 47MF(3225) |
| C26 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C28 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C30 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C31 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C32 | 1-100-352-91 | s | CAP, CHIP CERAMIC 1MF B (1608) |
| C33 | 1-100-620-91 | s | CAPACITOR, CHIP 47MF(3225) |
| C34 | 1-100-620-91 | s | CAPACITOR, CHIP 47MF(3225) |
| C35 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C36 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C37 | 1-127-760-11 | s | CAPACITOR,CERAMIC 4.7MF/6.3V |
| C38 | 1-127-760-11 | s | CAPACITOR,CERAMIC 4.7MF/6.3V |
| C39 | 1-127-760-11 | s | CAPACITOR,CERAMIC 4.7MF/6.3V |
| C40 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C41 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C42 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C45 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C46 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C201 | 1-100-352-91 | s | CAP, CHIP CERAMIC 1MF B (1608) |
| C202 | 1-165-887-91 | s | CAP, CERAMIC 0.22MF (1005) |
| C203 | 1-117-145-11 | s | CAPACITOR, ELECT 1MF/50V (BP) |
| C204 | 1-117-145-11 | s | CAPACITOR, ELECT 1MF/50V (BP) |
| C205 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C206 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C207 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C208 | 1-100-352-91 | s | CAP, CHIP CERAMIC 1MF B (1608) |
| C209 | 1-164-866-11 | s | CAPACITOR,CHIP CERAMIC 47PF/50 |
| C210 | 1-164-876-11 | s | CAPACITOR,CERAMIC 120PF/50V CH |
| C211 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C212 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C213 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C214 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C215 | 1-164-874-11 | s | CAPACITOR,CHIP CERAMIC 100PF |
| C216 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C217 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C218 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |

(AU-298 BOARD (SUFFIX 12))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C219 | 1-115-459-11 | s | CAPACITOR,ELECT 47MF/6.3V(BP) |
| C220 | 1-164-874-11 | s | CAPACITOR,CHIP CERAMIC 100PF |
| C221 | 1-164-874-11 | s | CAPACITOR,CHIP CERAMIC 100PF |
| C222 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C223 | 1-100-352-91 | s | CAP, CHIP CERAMIC 1MF B (1608) |
| C224 | 1-100-352-91 | s | CAP, CHIP CERAMIC 1MF B (1608) |
| C225 | 1-127-956-11 | s | CAPACITOR,CHIP FILM 0.1MF |
| C227 | 1-127-692-91 | s | CAP, CHIP CERAMIC 10MF B 3216 |
| C228 | 1-127-692-91 | s | CAP, CHIP CERAMIC 10MF B 3216 |
| C229 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C230 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C231 | 1-135-960-91 | s | CAP, CHIP CERAMIC 10MF B(3225) |
| C232 | 1-135-960-91 | s | CAP, CHIP CERAMIC 10MF B(3225) |
| C233 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C234 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C235 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C236 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C237 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C238 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C239 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C240 | 1-100-352-91 | s | CAP, CHIP CERAMIC 1MF B (1608) |
| C241 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C242 | 1-100-352-91 | s | CAP, CHIP CERAMIC 1MF B (1608) |
| C243 | 1-119-923-11 | s | CAPACITOR,CHIP CERAMIC 0.047MF |
| C246 | 1-164-874-11 | s | CAPACITOR,CHIP CERAMIC 100PF |
| C247 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C248 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C249 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C250 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C252 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C253 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C254 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C255 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C256 | 1-164-874-11 | s | CAPACITOR,CHIP CERAMIC 100PF |
| C257 | 1-164-874-11 | s | CAPACITOR,CHIP CERAMIC 100PF |
| C258 | 1-164-874-11 | s | CAPACITOR,CHIP CERAMIC 100PF |
| C259 | 1-164-874-11 | s | CAPACITOR,CHIP CERAMIC 100PF |
| C301 | 1-117-145-11 | s | CAPACITOR, ELECT 1MF/50V (BP) |
| C302 | 1-117-145-11 | s | CAPACITOR, ELECT 1MF/50V (BP) |
| C303 | 1-164-866-11 | s | CAPACITOR,CHIP CERAMIC 47PF/50 |
| C304 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C305 | 1-164-876-11 | s | CAPACITOR,CERAMIC 120PF/50V CH |
| C306 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C307 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C308 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C309 | 1-164-874-11 | s | CAPACITOR,CHIP CERAMIC 100PF |
| C310 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C311 | 1-100-352-91 | s | CAP, CHIP CERAMIC 1MF B (1608) |
| C312 | 1-100-352-91 | s | CAP, CHIP CERAMIC 1MF B (1608) |
| C313 | 1-115-459-11 | s | CAPACITOR,ELECT 47MF/6.3V(BP) |
| C314 | 1-164-874-11 | s | CAPACITOR,CHIP CERAMIC 100PF |
| C315 | 1-127-692-91 | s | CAP, CHIP CERAMIC 10MF B 3216 |
| C316 | 1-127-692-91 | s | CAP, CHIP CERAMIC 10MF B 3216 |
| C317 | 1-164-874-11 | s | CAPACITOR,CHIP CERAMIC 100PF |
| C318 | 1-164-940-11 | s | CAPACITOR,CHIP CERAMIC 3300/16 |
| C319 | 1-164-940-11 | s | CAPACITOR,CHIP CERAMIC 3300/16 |
| C320 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C321 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C322 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |

(AU-298 BOARD (SUFFIX 12))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C323 | 1-135-960-91 | s | CAP, CHIP CERAMIC 10MF B(3225) |
| C324 | 1-135-960-91 | s | CAP, CHIP CERAMIC 10MF B(3225) |
| C325 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C326 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C327 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C328 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C329 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C330 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C331 | 1-127-956-11 | s | CAPACITOR,CHIP FILM 0.1MF |
| C332 | 1-164-935-11 | s | CAPACITOR,CHIP CERAMIC 470PF |
| C333 | 1-164-935-11 | s | CAPACITOR,CHIP CERAMIC 470PF |
| C334 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C335 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C336 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C337 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C338 | 1-107-420-11 | s | CAPACITOR,ELECT 47MF/35V(105C) |
| C340 | 1-107-420-11 | s | CAPACITOR,ELECT 47MF/35V(105C) |
| C342 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C343 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C344 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C345 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C346 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C347 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C349 | 1-164-874-11 | s | CAPACITOR,CHIP CERAMIC 100PF |
| C350 | 1-164-874-11 | s | CAPACITOR,CHIP CERAMIC 100PF |
| C351 | 1-164-874-11 | s | CAPACITOR,CHIP CERAMIC 100PF |
| C352 | 1-164-874-11 | s | CAPACITOR,CHIP CERAMIC 100PF |
| C401 | 1-107-826-11 | s | CAPACITOR,CHIP CERAMIC 0.1MF |
| C402 | 1-127-692-91 | s | CAP, CHIP CERAMIC 10MF B 3216 |
| C403 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C404 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C405 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C406 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C407 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C408 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C409 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C410 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C411 | 1-126-404-11 | s | CAPACITOR,ELECT4.7MF/50V(CHIP) |
| C412 | 1-126-404-11 | s | CAPACITOR,ELECT4.7MF/50V(CHIP) |
| C413 | 1-126-404-11 | s | CAPACITOR,ELECT4.7MF/50V(CHIP) |
| C414 | 1-126-404-11 | s | CAPACITOR,ELECT4.7MF/50V(CHIP) |
| C415 | 1-117-145-11 | s | CAPACITOR, ELECT 1MF/50V (BP) |
| C416 | 1-117-145-11 | s | CAPACITOR, ELECT 1MF/50V (BP) |
| C417 | 1-117-145-11 | s | CAPACITOR, ELECT 1MF/50V (BP) |
| C418 | 1-117-145-11 | s | CAPACITOR, ELECT 1MF/50V (BP) |
| C419 | 1-117-145-11 | s | CAPACITOR, ELECT 1MF/50V (BP) |
| C420 | 1-117-145-11 | s | CAPACITOR, ELECT 1MF/50V (BP) |
| C421 | 1-117-145-11 | s | CAPACITOR, ELECT 1MF/50V (BP) |
| C422 | 1-117-145-11 | s | CAPACITOR, ELECT 1MF/50V (BP) |
| C423 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C424 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C425 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C426 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C427 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C428 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C429 | 1-164-876-11 | s | CAPACITOR,CERAMIC 120PF/50V CH |
| C430 | 1-164-876-11 | s | CAPACITOR,CERAMIC 120PF/50V CH |
| C431 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C432 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |

(AU-298 BOARD (SUFFIX 12))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C433 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C434 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C435 | 1-164-874-11 | s | CAPACITOR,CHIP CERAMIC 100PF |
| C436 | 1-164-874-11 | s | CAPACITOR,CHIP CERAMIC 100PF |
| C437 | 1-115-459-11 | s | CAPACITOR,ELECT 47MF/6.3V(BP) |
| C438 | 1-115-459-11 | s | CAPACITOR,ELECT 47MF/6.3V(BP) |
| C439 | 1-164-874-11 | s | CAPACITOR,CHIP CERAMIC 100PF |
| C440 | 1-164-874-11 | s | CAPACITOR,CHIP CERAMIC 100PF |
| C441 | 1-164-876-11 | s | CAPACITOR,CERAMIC 120PF/50V CH |
| C442 | 1-164-876-11 | s | CAPACITOR,CERAMIC 120PF/50V CH |
| C443 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C444 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C445 | 1-127-956-11 | s | CAPACITOR,CHIP FILM 0.1MF |
| C446 | 1-127-956-11 | s | CAPACITOR,CHIP FILM 0.1MF |
| C447 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C448 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C449 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C450 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| D1 | 8-719-989-76 | s | DIODE SC802-04-TE12RA |
| D2 | 8-719-989-76 | s | DIODE SC802-04-TE12RA |
| D3 | 8-719-037-41 | s | DIODE RD20SB-T1 |
| D4 | 8-719-037-41 | s | DIODE RD20SB-T1 |
| D5 | 8-719-017-03 | s | DIODE 02DZ4.7-TPH3 |
| D6 | 8-719-017-03 | s | DIODE 02DZ4.7-TPH3 |
| D7 | 8-719-161-05 | s | DIODE RD8.2SB-T1 |
| D8 | 8-719-161-05 | s | DIODE RD8.2SB-T1 |
| D9 | 8-719-017-03 | s | DIODE 02DZ4.7-TPH3 |
| D10 | 8-719-017-03 | s | DIODE 02DZ4.7-TPH3 |
| D11 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D12 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D201 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D202 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D203 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D204 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D205 | 8-719-036-65 | s | DIODE RD2.0SB-T1 |
| D206 | 8-719-036-65 | s | DIODE RD2.0SB-T1 |
| D207 | 8-719-820-41 | s | DIODE 1SS302 |
| D301 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D302 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D303 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D304 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D401 | 8-719-801-78 | s | DIODE 1SS184 |
| D402 | 8-719-801-78 | s | DIODE 1SS184 |
| D403 | 8-719-801-78 | s | DIODE 1SS184 |
| D404 | 8-719-801-78 | s | DIODE 1SS184 |
| D405 | 8-719-801-78 | s | DIODE 1SS184 |
| D406 | 8-719-801-78 | s | DIODE 1SS184 |
| D407 | 8-719-037-25 | s | DIODE RD13SB-T1 |
| D408 | 8-719-801-78 | s | DIODE 1SS184 |
| D409 | 8-719-801-78 | s | DIODE 1SS184 |
| D410 | 8-719-801-78 | s | DIODE 1SS184 |
| D411 | 8-719-801-78 | s | DIODE 1SS184 |
| D412 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D413 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D414 | 8-719-801-78 | s | DIODE 1SS184 |
| D415 | 8-719-801-78 | s | DIODE 1SS184 |
| D416 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D417 | 8-719-024-81 | s | DIODE 1SS300-TE85L |

(AU-298 BOARD (SUFFIX 12))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| D418 | 8-719-801-78 | s | DIODE 1SS184 |
| D419 | 8-719-801-78 | s | DIODE 1SS184 |
| D420 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D421 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D422 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D423 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D424 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D425 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D426 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D427 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| E1 | 1-535-877-22 | s | CHIP,CHECKER (TEST POINT) |
| IC3 | 8-759-327-01 | s | IC NJM062V-TE2 |
| IC4 | 6-704-976-01 | s | IC ADR381ART-REEL7 |
| IC5 | 8-759-327-01 | s | IC NJM062V-TE2 |
| IC11 | 8-759-672-76 | s | IC AK9813BF-E2 |
| IC12 | 8-759-672-76 | s | IC AK9813BF-E2 |
| IC13 | 8-759-672-76 | s | IC AK9813BF-E2 |
| IC15 | 8-759-327-01 | s | IC NJM062V-TE2 |
| IC16 | 8-759-327-01 | s | IC NJM062V-TE2 |
| IC18 | 8-759-973-71 | s | IC TL7705CPS-B |
| IC19 | 8-759-497-44 | s | IC TC7WH125FU(TE12R) |
| IC20 | 8-759-327-01 | s | IC NJM062V-TE2 |
| IC21 | 8-759-327-01 | s | IC NJM062V-TE2 |
| IC201 | 8-759-278-58 | s | IC NJM4558V (TE2) |
| IC202 | 8-759-441-31 | s | IC MC14053BDTR2 |
| IC203 | 8-759-278-58 | s | IC NJM4558V (TE2) |
| IC204 | 8-759-359-49 | s | IC NJM3414AV (TE2) |
| IC205 | 8-759-278-58 | s | IC NJM4558V (TE2) |
| IC206 | 8-759-085-04 | s | IC M51132FP |
| IC207 | 8-759-564-49 | s | IC TC7W53FU-TE12R |
| IC208 | 8-759-422-21 | s | IC NJM4580VTE2 |
| IC209 | 8-759-422-21 | s | IC NJM4580VTE2 |
| IC301 | 8-759-278-58 | s | IC NJM4558V (TE2) |
| IC302 | 8-759-441-31 | s | IC MC14053BDTR2 |
| IC303 | 8-759-278-58 | s | IC NJM4558V (TE2) |
| IC304 | 8-759-422-21 | s | IC NJM4580VTE2 |
| IC305 | 8-759-327-01 | s | IC NJM062V-TE2 |
| IC306 | 8-759-422-21 | s | IC NJM4580VTE2 |
| IC307 | 8-759-327-01 | s | IC NJM062V-TE2 |
| IC308 | 8-759-564-49 | s | IC TC7W53FU-TE12R |
| IC401 | 8-759-441-31 | s | IC MC14053BDTR2 |
| IC402 | 8-759-278-58 | s | IC NJM4558V (TE2) |
| IC411 | 8-759-441-31 | s | IC MC14053BDTR2 |
| IC412 | 8-759-278-58 | s | IC NJM4558V (TE2) |
| JC1 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| JC2 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| JC3 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| JC4 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| JC5 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| JC6 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| JC7 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| JC8 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| JC9 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| JC10 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| JC11 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| JC12 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| JC13 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| JC14 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |

(AU-298 BOARD (SUFFIX 12))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| JC15 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| JC16 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| JC17 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| JC18 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| JC19 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| JC20 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| JC21 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| JC22 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| JC23 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| JC24 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| JC25 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| JC26 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| JC27 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| JC28 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| JC29 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| JC30 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| JC201 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| JC202 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| L1 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L2 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L3 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L4 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L5 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L6 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L7 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L8 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L9 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L10 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L201 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L202 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| Q1 | 8-729-927-99 | s | TRANSISTOR 2SC4617R |
| Q2 | 8-729-927-99 | s | TRANSISTOR 2SC4617R |
| Q3 | 8-729-230-27 | s | TRANSISTOR 2SA1213Y-TE12L |
| Q4 | 8-729-807-51 | s | TRANSISTOR 2SD1623-S |
| Q5 | 8-729-807-51 | s | TRANSISTOR 2SD1623-S |
| Q6 | 8-729-807-51 | s | TRANSISTOR 2SD1623-S |
| Q7 | 8-729-928-19 | s | TRANSISTOR 2SA1774R |
| Q8 | 8-729-927-99 | s | TRANSISTOR 2SC4617R |
| Q201 | 8-729-928-81 | s | TRANSISTOR DTC144EE |
| Q202 | 8-729-928-81 | s | TRANSISTOR DTC144EE |
| Q203 | 8-729-928-81 | s | TRANSISTOR DTC144EE |
| Q204 | 8-729-928-19 | s | TRANSISTOR 2SA1774R |
| Q208 | 8-729-053-44 | s | TRANSISTOR 2SK880-Y-TE85R |
| Q209 | 8-729-053-44 | s | TRANSISTOR 2SK880-Y-TE85R |
| Q210 | 8-729-053-44 | s | TRANSISTOR 2SK880-Y-TE85R |
| Q211 | 8-729-053-44 | s | TRANSISTOR 2SK880-Y-TE85R |
| Q212 | 8-729-053-44 | s | TRANSISTOR 2SK880-Y-TE85R |
| Q216 | 8-729-927-99 | s | TRANSISTOR 2SC4617R |
| Q217 | 8-729-928-19 | s | TRANSISTOR 2SA1774R |
| Q218 | 8-729-928-81 | s | TRANSISTOR DTC144EE |
| Q219 | 8-729-928-81 | s | TRANSISTOR DTC144EE |
| Q301 | 8-729-928-81 | s | TRANSISTOR DTC144EE |
| Q302 | 8-729-928-81 | s | TRANSISTOR DTC144EE |
| Q303 | 8-729-928-81 | s | TRANSISTOR DTC144EE |
| Q304 | 8-729-928-19 | s | TRANSISTOR 2SA1774R |
| Q308 | 8-729-053-44 | s | TRANSISTOR 2SK880-Y-TE85R |
| Q309 | 8-729-053-44 | s | TRANSISTOR 2SK880-Y-TE85R |
| Q310 | 8-729-053-44 | s | TRANSISTOR 2SK880-Y-TE85R |

(AU-298 BOARD (SUFFIX 12))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| Q311 | 8-729-053-44 | s | TRANSISTOR 2SK880-Y-TE85R |
| Q312 | 8-729-053-44 | s | TRANSISTOR 2SK880-Y-TE85R |
| Q316 | 8-729-927-99 | s | TRANSISTOR 2SC4617R |
| Q317 | 8-729-928-19 | s | TRANSISTOR 2SA1774R |
| Q401 | 8-729-807-51 | s | TRANSISTOR 2SD1623-S |
| Q402 | 8-729-928-81 | s | TRANSISTOR DTC144EE |
| Q403 | 8-729-928-81 | s | TRANSISTOR DTC144EE |
| Q404 | 8-729-928-81 | s | TRANSISTOR DTC144EE |
| Q405 | 8-729-928-81 | s | TRANSISTOR DTC144EE |
| Q406 | 8-729-928-81 | s | TRANSISTOR DTC144EE |
| Q407 | 8-729-928-81 | s | TRANSISTOR DTC144EE |
| Q408 | 8-729-928-81 | s | TRANSISTOR DTC144EE |
| Q409 | 8-729-928-19 | s | TRANSISTOR 2SA1774R |
| Q410 | 8-729-927-99 | s | TRANSISTOR 2SC4617R |
| Q411 | 8-729-928-81 | s | TRANSISTOR DTC144EE |
| Q412 | 8-729-928-81 | s | TRANSISTOR DTC144EE |
| Q413 | 8-729-928-81 | s | TRANSISTOR DTC144EE |
| Q414 | 8-729-928-81 | s | TRANSISTOR DTC144EE |
| Q415 | 8-729-928-81 | s | TRANSISTOR DTC144EE |
| Q416 | 8-729-928-19 | s | TRANSISTOR 2SA1774R |
| Q417 | 8-729-928-19 | s | TRANSISTOR 2SA1774R |
| Q418 | 8-729-928-19 | s | TRANSISTOR 2SA1774R |
| Q419 | 8-729-928-19 | s | TRANSISTOR 2SA1774R |
| Q420 | 8-729-928-81 | s | TRANSISTOR DTC144EE |
| Q421 | 8-729-928-81 | s | TRANSISTOR DTC144EE |
| Q422 | 8-729-928-19 | s | TRANSISTOR 2SA1774R |
| Q423 | 8-729-927-99 | s | TRANSISTOR 2SC4617R |
| Q428 | 8-729-053-44 | s | TRANSISTOR 2SK880-Y-TE85R |
| Q429 | 8-729-053-44 | s | TRANSISTOR 2SK880-Y-TE85R |
| Q430 | 8-729-053-44 | s | TRANSISTOR 2SK880-Y-TE85R |
| Q431 | 8-729-053-44 | s | TRANSISTOR 2SK880-Y-TE85R |
| Q432 | 8-729-053-44 | s | TRANSISTOR 2SK880-Y-TE85R |
| Q433 | 8-729-053-44 | s | TRANSISTOR 2SK880-Y-TE85R |
| Q434 | 8-729-053-44 | s | TRANSISTOR 2SK880-Y-TE85R |
| Q435 | 8-729-053-44 | s | TRANSISTOR 2SK880-Y-TE85R |
| Q436 | 8-729-053-44 | s | TRANSISTOR 2SK880-Y-TE85R |
| Q437 | 8-729-053-44 | s | TRANSISTOR 2SK880-Y-TE85R |
| Q444 | 8-729-927-99 | s | TRANSISTOR 2SC4617R |
| Q445 | 8-729-928-19 | s | TRANSISTOR 2SA1774R |
| Q446 | 8-729-927-99 | s | TRANSISTOR 2SC4617R |
| Q447 | 8-729-928-19 | s | TRANSISTOR 2SA1774R |
| Q448 | 8-729-928-81 | s | TRANSISTOR DTC144EE |
| R4 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R5 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R6 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R7 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R8 | 1-216-833-11 | s | RESISTOR,CHIP 10K 1/10W (1608) |
| R9 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R10 | 1-216-833-11 | s | RESISTOR,CHIP 10K 1/10W (1608) |
| R11 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R12 | 1-216-833-11 | s | RESISTOR,CHIP 10K 1/10W (1608) |
| R13 | 1-216-833-11 | s | RESISTOR,CHIP 10K 1/10W (1608) |
| R14 | 1-216-833-11 | s | RESISTOR,CHIP 10K 1/10W (1608) |
| R15 | 1-216-833-11 | s | RESISTOR,CHIP 10K 1/10W (1608) |
| R16 | 1-216-833-11 | s | RESISTOR,CHIP 10K 1/10W (1608) |
| R17 | 1-216-833-11 | s | RESISTOR,CHIP 10K 1/10W (1608) |
| R18 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R19 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |

(AU-298 BOARD (SUFFIX 12))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R20 | 1-208-923-11 | s | RESISTOR, CHIP 33K (1005) |
| R21 | 1-208-923-11 | s | RESISTOR, CHIP 33K (1005) |
| R22 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R23 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R24 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R25 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R26 | 1-208-931-11 | s | RESISTOR, CHIP 68K (1005) |
| R27 | 1-208-931-11 | s | RESISTOR, CHIP 68K (1005) |
| R28 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R29 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R30 | 1-208-923-11 | s | RESISTOR, CHIP 33K (1005) |
| R31 | 1-208-923-11 | s | RESISTOR, CHIP 33K (1005) |
| R32 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R33 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R34 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R35 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R36 | 1-208-931-11 | s | RESISTOR, CHIP 68K (1005) |
| R37 | 1-208-931-11 | s | RESISTOR, CHIP 68K (1005) |
| R38 | 1-208-931-11 | s | RESISTOR, CHIP 68K (1005) |
| R39 | 1-208-931-11 | s | RESISTOR, CHIP 68K (1005) |
| R40 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R41 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R42 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R43 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R44 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R45 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R46 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R47 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R48 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R49 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R50 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R51 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R52 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R53 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R54 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R55 | 1-208-675-11 | s | RESISTOR CHIP 470 1/16W (1005) |
| R56 | 1-208-675-11 | s | RESISTOR CHIP 470 1/16W (1005) |
| R57 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R58 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R59 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R60 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R61 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R62 | 1-208-691-11 | s | RESISTOR CHIP 2.2K 1/16W(1005) |
| R63 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R64 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R65 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R66 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R67 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R68 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R69 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R70 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R71 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R72 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R73 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R74 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R75 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R76 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R77 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R78 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |

(AU-298 BOARD (SUFFIX 12))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R79 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R80 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R81 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R82 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R83 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R84 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R85 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R86 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R87 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R88 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R90 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R94 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R95 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R96 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R97 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R98 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R99 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R201 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R202 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R203 | 1-208-943-11 | s | RESISTOR CHIP 220K |
| R204 | 1-208-943-11 | s | RESISTOR CHIP 220K |
| R205 | 1-208-943-11 | s | RESISTOR CHIP 220K |
| R206 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R207 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R208 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R209 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R210 | 1-208-675-11 | s | RESISTOR CHIP 470 1/16W (1005) |
| R211 | 1-208-675-11 | s | RESISTOR CHIP 470 1/16W (1005) |
| R212 | 1-208-675-11 | s | RESISTOR CHIP 470 1/16W (1005) |
| R213 | 1-208-675-11 | s | RESISTOR CHIP 470 1/16W (1005) |
| R214 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R215 | 1-208-699-11 | s | RESISTOR,CHIP 4.7K 1/16W(1005) |
| R216 | 1-208-699-11 | s | RESISTOR,CHIP 4.7K 1/16W(1005) |
| R217 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R218 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R219 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R220 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R221 | 1-208-695-11 | s | RESISTOR CHIP 3.3K 1/16W(1005) |
| R222 | 1-208-695-11 | s | RESISTOR CHIP 3.3K 1/16W(1005) |
| R223 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R224 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R225 | 1-218-985-11 | s | RESISTOR CHIP 470K 1/16W(1005) |
| R226 | 1-218-985-11 | s | RESISTOR CHIP 470K 1/16W(1005) |
| R227 | 1-218-985-11 | s | RESISTOR CHIP 470K 1/16W(1005) |
| R228 | 1-218-985-11 | s | RESISTOR CHIP 470K 1/16W(1005) |
| R229 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R230 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R231 | 1-208-691-11 | s | RESISTOR CHIP 2.2K 1/16W(1005) |
| R232 | 1-208-699-11 | s | RESISTOR,CHIP 4.7K 1/16W(1005) |
| R233 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R234 | 1-208-675-11 | s | RESISTOR CHIP 470 1/16W (1005) |
| R235 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R236 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R237 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R238 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R239 | 1-208-695-11 | s | RESISTOR CHIP 3.3K 1/16W(1005) |
| R240 | 1-208-695-11 | s | RESISTOR CHIP 3.3K 1/16W(1005) |
| R241 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R242 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |

(AU-298 BOARD (SUFFIX 12))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R243 | 1-208-675-11 | s | RESISTOR CHIP 470 1/16W (1005) |
| R244 | 1-208-675-11 | s | RESISTOR CHIP 470 1/16W (1005) |
| R245 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R246 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R247 | 1-208-699-11 | s | RESISTOR,CHIP 4.7K 1/16W(1005) |
| R248 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R250 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R251 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R253 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R254 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R257 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R258 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R259 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R260 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R261 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R262 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R265 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R266 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R267 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R268 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R269 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R270 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R271 | 1-218-985-11 | s | RESISTOR CHIP 470K 1/16W(1005) |
| R272 | 1-218-985-11 | s | RESISTOR CHIP 470K 1/16W(1005) |
| R273 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R274 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R275 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R276 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R277 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R278 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R279 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R280 | 1-218-985-11 | s | RESISTOR CHIP 470K 1/16W(1005) |
| R281 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R282 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R283 | 1-218-985-11 | s | RESISTOR CHIP 470K 1/16W(1005) |
| R284 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R285 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R286 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R287 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R288 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R289 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R290 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R291 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R292 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R293 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R294 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R295 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R296 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R297 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R298 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R299 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R301 | 1-208-943-11 | s | RESISTOR CHIP 220K |
| R302 | 1-208-943-11 | s | RESISTOR CHIP 220K |
| R303 | 1-208-943-11 | s | RESISTOR CHIP 220K |
| R304 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R305 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R306 | 1-208-675-11 | s | RESISTOR CHIP 470 1/16W (1005) |
| R307 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R308 | 1-208-675-11 | s | RESISTOR CHIP 470 1/16W (1005) |

(AU-298 BOARD (SUFFIX 12))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R309 | 1-208-675-11 | s | RESISTOR CHIP 470 1/16W (1005) |
| R310 | 1-208-675-11 | s | RESISTOR CHIP 470 1/16W (1005) |
| R311 | 1-208-699-11 | s | RESISTOR,CHIP 4.7K 1/16W(1005) |
| R312 | 1-208-699-11 | s | RESISTOR,CHIP 4.7K 1/16W(1005) |
| R313 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R314 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R315 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R316 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R317 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R318 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R320 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R322 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R323 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R324 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R325 | 1-208-695-11 | s | RESISTOR CHIP 3.3K 1/16W(1005) |
| R326 | 1-208-695-11 | s | RESISTOR CHIP 3.3K 1/16W(1005) |
| R327 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R328 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R329 | 1-218-985-11 | s | RESISTOR CHIP 470K 1/16W(1005) |
| R330 | 1-218-985-11 | s | RESISTOR CHIP 470K 1/16W(1005) |
| R331 | 1-218-985-11 | s | RESISTOR CHIP 470K 1/16W(1005) |
| R332 | 1-218-985-11 | s | RESISTOR CHIP 470K 1/16W(1005) |
| R333 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R334 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R335 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R336 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R337 | 1-218-985-11 | s | RESISTOR CHIP 470K 1/16W(1005) |
| R338 | 1-218-985-11 | s | RESISTOR CHIP 470K 1/16W(1005) |
| R339 | 1-208-699-11 | s | RESISTOR,CHIP 4.7K 1/16W(1005) |
| R340 | 1-208-699-11 | s | RESISTOR,CHIP 4.7K 1/16W(1005) |
| R341 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R342 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R343 | 1-208-691-11 | s | RESISTOR CHIP 2.2K 1/16W(1005) |
| R344 | 1-208-699-11 | s | RESISTOR,CHIP 4.7K 1/16W(1005) |
| R345 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R346 | 1-208-675-11 | s | RESISTOR CHIP 470 1/16W (1005) |
| R347 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R348 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R349 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R350 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R351 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R352 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R353 | 1-208-695-11 | s | RESISTOR CHIP 3.3K 1/16W(1005) |
| R354 | 1-208-695-11 | s | RESISTOR CHIP 3.3K 1/16W(1005) |
| R355 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R356 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R357 | 1-208-675-11 | s | RESISTOR CHIP 470 1/16W (1005) |
| R358 | 1-208-675-11 | s | RESISTOR CHIP 470 1/16W (1005) |
| R359 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R360 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R361 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R362 | 1-208-721-11 | s | RESISTOR CHIP 39K 1/16W (1005) |
| R363 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R364 | 1-208-721-11 | s | RESISTOR CHIP 39K 1/16W (1005) |
| R365 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R366 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R367 | 1-208-699-11 | s | RESISTOR,CHIP 4.7K 1/16W(1005) |
| R368 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R369 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |

(AU-298 BOARD (SUFFIX 12))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R370 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R371 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R372 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R373 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R374 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R375 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R376 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R377 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R378 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R379 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R380 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R381 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R382 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R383 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R384 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R385 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R386 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R387 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R388 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R389 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R390 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R392 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R394 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R395 | 1-208-699-11 | s | RESISTOR,CHIP 4.7K 1/16W(1005) |
| R396 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R397 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R398 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R399 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R401 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R402 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R403 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R404 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R405 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R406 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R407 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R408 | 1-208-691-11 | s | RESISTOR CHIP 2.2K 1/16W(1005) |
| R409 | 1-208-691-11 | s | RESISTOR CHIP 2.2K 1/16W(1005) |
| R410 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R411 | 1-208-691-11 | s | RESISTOR CHIP 2.2K 1/16W(1005) |
| R412 | 1-208-691-11 | s | RESISTOR CHIP 2.2K 1/16W(1005) |
| R413 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R414 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R415 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R416 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R417 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R418 | 1-208-943-11 | s | RESISTOR CHIP 220K |
| R419 | 1-208-943-11 | s | RESISTOR CHIP 220K |
| R420 | 1-208-943-11 | s | RESISTOR CHIP 220K |
| R421 | 1-208-943-11 | s | RESISTOR CHIP 220K |
| R422 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R423 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R424 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R425 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R426 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R427 | 1-208-943-11 | s | RESISTOR CHIP 220K |
| R428 | 1-208-943-11 | s | RESISTOR CHIP 220K |
| R429 | 1-208-943-11 | s | RESISTOR CHIP 220K |
| R430 | 1-208-943-11 | s | RESISTOR CHIP 220K |
| R431 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |

(AU-298 BOARD (SUFFIX 12))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R432 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R433 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R434 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R435 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R436 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R437 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R438 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R439 | 1-220-264-11 | s | RESISTOR,CHIP 1K 1/4W (3225) |
| R440 | 1-220-264-11 | s | RESISTOR,CHIP 1K 1/4W (3225) |
| R441 | 1-220-264-11 | s | RESISTOR,CHIP 1K 1/4W (3225) |
| R442 | 1-220-264-11 | s | RESISTOR,CHIP 1K 1/4W (3225) |
| R443 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R444 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R445 | 1-220-281-11 | s | RESISTOR CHIP 4.7K 1/4W (3225) |
| R446 | 1-220-281-11 | s | RESISTOR CHIP 4.7K 1/4W (3225) |
| R447 | 1-220-281-11 | s | RESISTOR CHIP 4.7K 1/4W (3225) |
| R448 | 1-220-281-11 | s | RESISTOR CHIP 4.7K 1/4W (3225) |
| R449 | 1-220-281-11 | s | RESISTOR CHIP 4.7K 1/4W (3225) |
| R450 | 1-220-281-11 | s | RESISTOR CHIP 4.7K 1/4W (3225) |
| R451 | 1-220-281-11 | s | RESISTOR CHIP 4.7K 1/4W (3225) |
| R452 | 1-220-281-11 | s | RESISTOR CHIP 4.7K 1/4W (3225) |
| R453 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R454 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R455 | 1-208-671-11 | s | RESISTOR CHIP 330 1/16W (1005) |
| R456 | 1-220-874-11 | s | RES, CHIP 15 (1005) |
| R457 | 1-208-671-11 | s | RESISTOR CHIP 330 1/16W (1005) |
| R458 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R459 | 1-208-671-11 | s | RESISTOR CHIP 330 1/16W (1005) |
| R460 | 1-220-874-11 | s | RES, CHIP 15 (1005) |
| R461 | 1-208-671-11 | s | RESISTOR CHIP 330 1/16W (1005) |
| R462 | 1-208-671-11 | s | RESISTOR CHIP 330 1/16W (1005) |
| R463 | 1-220-874-11 | s | RES, CHIP 15 (1005) |
| R464 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R465 | 1-208-671-11 | s | RESISTOR CHIP 330 1/16W (1005) |
| R466 | 1-208-671-11 | s | RESISTOR CHIP 330 1/16W (1005) |
| R467 | 1-220-874-11 | s | RES, CHIP 15 (1005) |
| R468 | 1-208-671-11 | s | RESISTOR CHIP 330 1/16W (1005) |
| R469 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R470 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R471 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R472 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R473 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R474 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R475 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R476 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R477 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R478 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R479 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R480 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R481 | 1-208-695-11 | s | RESISTOR CHIP 3.3K 1/16W(1005) |
| R482 | 1-208-695-11 | s | RESISTOR CHIP 3.3K 1/16W(1005) |
| R483 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R484 | 1-208-695-11 | s | RESISTOR CHIP 3.3K 1/16W(1005) |
| R485 | 1-208-695-11 | s | RESISTOR CHIP 3.3K 1/16W(1005) |
| R486 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R487 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R488 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R489 | 1-218-985-11 | s | RESISTOR CHIP 470K 1/16W(1005) |
| R490 | 1-218-985-11 | s | RESISTOR CHIP 470K 1/16W(1005) |

(AU-298 BOARD (SUFFIX 12))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R491 | 1-218-985-11 | s | RESISTOR CHIP 470K 1/16W(1005) |
| R492 | 1-218-985-11 | s | RESISTOR CHIP 470K 1/16W(1005) |
| R493 | 1-218-985-11 | s | RESISTOR CHIP 470K 1/16W(1005) |
| R494 | 1-218-985-11 | s | RESISTOR CHIP 470K 1/16W(1005) |
| R495 | 1-218-985-11 | s | RESISTOR CHIP 470K 1/16W(1005) |
| R496 | 1-218-985-11 | s | RESISTOR CHIP 470K 1/16W(1005) |
| R497 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R498 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R499 | 1-208-691-11 | s | RESISTOR CHIP 2.2K 1/16W(1005) |
| R500 | 1-208-699-11 | s | RESISTOR,CHIP 4.7K 1/16W(1005) |
| R501 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R502 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R503 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R504 | 1-208-691-11 | s | RESISTOR CHIP 2.2K 1/16W(1005) |
| R505 | 1-208-699-11 | s | RESISTOR,CHIP 4.7K 1/16W(1005) |
| R506 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R507 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R508 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R509 | 1-208-675-11 | s | RESISTOR CHIP 470 1/16W (1005) |
| R510 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R511 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R512 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R513 | 1-208-675-11 | s | RESISTOR CHIP 470 1/16W (1005) |
| R514 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R515 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R516 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R517 | 1-208-695-11 | s | RESISTOR CHIP 3.3K 1/16W(1005) |
| R518 | 1-208-695-11 | s | RESISTOR CHIP 3.3K 1/16W(1005) |
| R519 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R520 | 1-208-695-11 | s | RESISTOR CHIP 3.3K 1/16W(1005) |
| R521 | 1-208-695-11 | s | RESISTOR CHIP 3.3K 1/16W(1005) |
| R522 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R523 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R524 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R525 | 1-208-675-11 | s | RESISTOR CHIP 470 1/16W (1005) |
| R526 | 1-208-675-11 | s | RESISTOR CHIP 470 1/16W (1005) |
| R527 | 1-208-675-11 | s | RESISTOR CHIP 470 1/16W (1005) |
| R528 | 1-208-675-11 | s | RESISTOR CHIP 470 1/16W (1005) |
| R529 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R530 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R531 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R532 | 1-208-699-11 | s | RESISTOR,CHIP 4.7K 1/16W(1005) |
| R533 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R534 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R535 | 1-208-699-11 | s | RESISTOR,CHIP 4.7K 1/16W(1005) |
| R536 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R537 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R538 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R539 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R540 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R541 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R542 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R543 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R544 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R545 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R546 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R547 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R548 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R549 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |

(AU-298 BOARD (SUFFIX 12))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R550 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R551 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R552 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R553 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R554 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R555 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R556 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R601 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R602 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R603 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R604 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R605 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R606 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R607 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R608 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R609 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R610 | 1-208-943-11 | s | RESISTOR CHIP 220K |
| R611 | 1-208-943-11 | s | RESISTOR CHIP 220K |
| R613 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R614 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R615 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R616 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R617 | 1-218-985-11 | s | RESISTOR CHIP 470K 1/16W(1005) |
| R650 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R651 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R659 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R660 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R662 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R663 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| RV1 | 1-225-811-21 | s | RES, ADJ, CERMET 20K |
| RV2 | 1-225-811-21 | s | RES, ADJ, CERMET 20K |
| S1 | 1-762-217-31 | s | SWITCH, SLIDE |
| S2 | 1-762-217-31 | s | SWITCH, SLIDE |
| S3 | 1-692-881-41 | s | SWITCH, SLIDE |
| THP3 | ⚠ 1-803-353-21 | s | THERMISTOR, POSITIVE |
| THP4 | ⚠ 1-803-353-21 | s | THERMISTOR, POSITIVE |
| THP6 | ⚠ 1-803-353-21 | s | THERMISTOR, POSITIVE |

---

AU-298 BOARD (SUFFIX 13-)

---

*1: [Board No. suffix 13]
*2: [Board No. suffix 14-]

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| 1pc | A-1101-924-A | s | MOUNTED CIRCUIT BOARD, AU-298 |
| 3pcs | 3-729-061-02 | s | SCREW (M2) (TYPE 1) |
| 2pcs | 4-654-273-02 | s | ACE (M2), LOCK |
| C1 | 1-127-692-91 | s | CAP, CHIP CERAMIC 10MF B 3225 |
| C2 | 1-127-692-91 | s | CAP, CHIP CERAMIC 10MF B 3225 |
| C3 | 1-126-400-21 | s | CAP, CHIP ELECT 22MF(6.3X5.7) |
| C4 | 1-126-400-21 | s | CAP, CHIP ELECT 22MF(6.3X5.7) |
| C5 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| C6 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| C7 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C8 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C10 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| C11 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| C13 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| C14 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| C15 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C16 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C17 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C19 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C20 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C21 | 1-125-777-11 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C24 | 1-100-620-91 | s | CAP, CHIP CERAMIC 47MF B(3225) |
| C25 | 1-100-620-91 | s | CAP, CHIP CERAMIC 47MF B(3225) |
| C26 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C28 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C30 | 1-125-777-11 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C31 | 1-125-777-11 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C32 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| C33 | 1-100-620-91 | s | CAP, CHIP CERAMIC 47MF B(3225) |
| C34 | 1-100-620-91 | s | CAP, CHIP CERAMIC 47MF B(3225) |
| C35 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C36 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C37 | 1-127-760-91 | s | CAP, CHIP CERAMIC 4.7MF B 2012 |
| C38 | 1-127-760-91 | s | CAP, CHIP CERAMIC 4.7MF B 2012 |
| C39 | 1-127-760-91 | s | CAP, CHIP CERAMIC 4.7MF B 2012 |
| C40 | 1-125-777-11 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C41 | 1-125-777-11 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C42 | 1-125-777-11 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C45 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C46 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C47 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| C48 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| C201 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| C202 | 1-165-887-91 | s | CAP, CERAMIC 0.22MF (1005) |
| C203 | 1-117-145-21 | s | CAP, ELECT 1MF |
| C204 | 1-117-145-21 | s | CAP, ELECT 1MF |
| C205 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C206 | 1-125-777-11 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C207 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C208 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| C209 | 1-164-866-81 | s | CAP, CHIP CERAMIC 47PF CH 1005 |
| C210 | 1-164-876-81 | s | CAP,CHIP CERAMIC 120PF CH 1005 |
| C211 | 1-125-777-11 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C212 | 1-125-777-11 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C213 | 1-125-777-11 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C214 | 1-125-777-11 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C215 | 1-164-882-81 | s | CAP,CHIP CERAMIC 220PF CH 1005 |

(AU-298 BOARD (SUFFIX 13-))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C216 | 1-125-777-11 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C217 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C218 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C219 | 1-115-459-21 | s | CAP, ELECT 47MF |
| C220 | 1-164-882-81 | s | CAP,CHIP CERAMIC 220PF CH 1005 |
| C221 | 1-164-874-81 | s | CAP,CHIP CERAMIC 100PF CH 1005 |
| C222 | 1-125-777-11 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C223 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| C224 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| C225 | 1-127-956-21 | s | CAP, CHIP FILM 0.1MF (3225) |
| C227 | 1-127-692-91 | s | CAP, CHIP CERAMIC 10MF B 3225 |
| C228 | 1-127-692-91 | s | CAP, CHIP CERAMIC 10MF B 3225 |
| C229 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C230 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C231 | 1-135-960-91 | s | CAP, CHIP CERAMIC 10MF B(3225) |
| C232 | 1-135-960-91 | s | CAP, CHIP CERAMIC 10MF B(3225) |
| C233 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C234 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C235 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C236 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C237 | 1-112-015-91 | s | CAP, CHIP CERAMIC 47MF B 3225 |
| C238 | 1-125-777-11 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C239 | 1-125-777-11 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C240 *1 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| *2 | 1-100-566-91 | s | CERAMIC CHIP 0.1MF 25V |
| C241 *1 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C242 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| C243 | 1-119-923-81 | s | CAP, CERAMIC 0.047MF B 1005 |
| C246 | 1-164-874-81 | s | CAP,CHIP CERAMIC 100PF CH 1005 |
| C247 | 1-125-777-11 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C248 | 1-125-777-11 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C249 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C250 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C252 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C253 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C254 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C255 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C256 | 1-164-874-81 | s | CAP,CHIP CERAMIC 100PF CH 1005 |
| C257 | 1-164-874-81 | s | CAP,CHIP CERAMIC 100PF CH 1005 |
| C258 | 1-164-874-81 | s | CAP,CHIP CERAMIC 100PF CH 1005 |
| C259 | 1-164-874-81 | s | CAP,CHIP CERAMIC 100PF CH 1005 |
| C260 | 1-112-015-91 | s | CAP, CHIP CERAMIC 47MF B 3225 |
| C261 | 1-164-882-81 | s | CAP,CHIP CERAMIC 220PF CH 1005 |
| C262 | 1-164-882-81 | s | CAP,CHIP CERAMIC 220PF CH 1005 |
| C301 | 1-117-145-21 | s | CAP, ELECT 1MF |
| C302 | 1-117-145-21 | s | CAP, ELECT 1MF |
| C303 | 1-164-866-81 | s | CAP, CHIP CERAMIC 47PF CH 1005 |
| C304 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C305 | 1-164-876-81 | s | CAP,CHIP CERAMIC 120PF CH 1005 |
| C306 | 1-125-777-11 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C307 | 1-125-777-11 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C308 | 1-125-777-11 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C309 | 1-164-882-81 | s | CAP,CHIP CERAMIC 220PF CH 1005 |
| C310 | 1-125-777-11 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C311 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| C312 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| C313 | 1-115-459-21 | s | CAP, ELECT 47MF |
| C314 | 1-164-882-81 | s | CAP,CHIP CERAMIC 220PF CH 1005 |
| C315 | 1-127-692-91 | s | CAP, CHIP CERAMIC 10MF B 3225 |

(AU-298 BOARD (SUFFIX 13-))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C316 | 1-127-692-91 | s | CAP, CHIP CERAMIC 10MF B 3225 |
| C317 | 1-164-874-81 | s | CAP,CHIP CERAMIC 100PF CH 1005 |
| C318 | 1-164-940-81 | s | CAP,CHIP CERAMIC 3300PF B 1005 |
| C319 | 1-164-940-81 | s | CAP,CHIP CERAMIC 3300PF B 1005 |
| C320 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C321 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C322 | 1-125-777-11 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C323 | 1-135-960-91 | s | CAP, CHIP CERAMIC 10MF B(3225) |
| C324 | 1-135-960-91 | s | CAP, CHIP CERAMIC 10MF B(3225) |
| C325 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C326 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C327 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C328 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C329 | 1-125-777-11 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C330 | 1-125-777-11 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C331 | 1-127-956-21 | s | CAP, CHIP FILM 0.1MF (3225) |
| C332 | 1-164-935-81 | s | CAP, CHIP CERAMIC 470PF B 1005 |
| C333 | 1-164-935-81 | s | CAP, CHIP CERAMIC 470PF B 1005 |
| C334 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C335 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C336 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C337 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C338 | 1-107-420-21 | s | CAP, CHIP ELECT 47MF |
| C340 | 1-107-420-21 | s | CAP, CHIP ELECT 47MF |
| C342 | 1-112-015-91 | s | CAP, CHIP CERAMIC 47MF B 3225 |
| C343 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C344 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C345 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C346 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C347 | 1-125-777-11 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C349 | 1-164-874-81 | s | CAP,CHIP CERAMIC 100PF CH 1005 |
| C350 | 1-164-874-81 | s | CAP,CHIP CERAMIC 100PF CH 1005 |
| C351 | 1-164-874-81 | s | CAP,CHIP CERAMIC 100PF CH 1005 |
| C352 | 1-164-874-81 | s | CAP,CHIP CERAMIC 100PF CH 1005 |
| C353 | 1-112-015-91 | s | CAP, CHIP CERAMIC 47MF B 3225 |
| C354 | 1-164-882-81 | s | CAP,CHIP CERAMIC 220PF CH 1005 |
| C355 | 1-164-882-81 | s | CAP,CHIP CERAMIC 220PF CH 1005 |
| C401 | 1-115-339-91 | s | CAP, CERAMIC 0.1MF B (2012) |
| C402 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C403 *1 | 1-164-874-81 | s | CAP,CHIP CERAMIC 100PF CH 1005 |
| *2 | 1-164-935-81 | s | CERAMIC CHIP 470PF |
| C404 *1 | 1-164-874-81 | s | CAP,CHIP CERAMIC 100PF CH 1005 |
| *2 | 1-164-935-81 | s | CERAMIC CHIP 470PF |
| C405 *1 | 1-164-874-81 | s | CAP,CHIP CERAMIC 100PF CH 1005 |
| *2 | 1-164-935-81 | s | CERAMIC CHIP 470PF |
| C406 *1 | 1-164-874-81 | s | CAP,CHIP CERAMIC 100PF CH 1005 |
| *2 | 1-164-935-81 | s | CERAMIC CHIP 470PF |
| C407 *1 | 1-164-874-81 | s | CAP,CHIP CERAMIC 100PF CH 1005 |
| *2 | 1-164-935-81 | s | CERAMIC CHIP 470PF |
| C408 *1 | 1-164-874-81 | s | CAP,CHIP CERAMIC 100PF CH 1005 |
| *2 | 1-164-935-81 | s | CERAMIC CHIP 470PF |
| C409 *1 | 1-164-874-81 | s | CAP,CHIP CERAMIC 100PF CH 1005 |
| *2 | 1-164-935-81 | s | CERAMIC CHIP 470PF |
| C410 *1 | 1-164-874-81 | s | CAP,CHIP CERAMIC 100PF CH 1005 |
| *2 | 1-164-935-81 | s | CERAMIC CHIP 470PF |
| C411 | 1-126-404-21 | s | CAP, CHIP ELECT 4.7MF (5X5.7) |
| C412 | 1-126-404-21 | s | CAP, CHIP ELECT 4.7MF (5X5.7) |
| C413 | 1-126-404-21 | s | CAP, CHIP ELECT 4.7MF (5X5.7) |
| C414 | 1-126-404-21 | s | CAP, CHIP ELECT 4.7MF (5X5.7) |
| C415 | 1-117-145-21 | s | CAP, ELECT 1MF |

(AU-298 BOARD (SUFFIX 13-))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C416 | 1-117-145-21 | s | CAP, ELECT 1MF |
| C417 | 1-117-145-21 | s | CAP, ELECT 1MF |
| C418 | 1-117-145-21 | s | CAP, ELECT 1MF |
| C419 | 1-117-145-21 | s | CAP, ELECT 1MF |
| C420 | 1-117-145-21 | s | CAP, ELECT 1MF |
| C421 | 1-117-145-21 | s | CAP, ELECT 1MF |
| C422 | 1-117-145-21 | s | CAP, ELECT 1MF |
| C423 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C424 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C425 | 1-125-777-11 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C426 | 1-125-777-11 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C427 | 1-125-777-11 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C428 | 1-125-777-11 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C429 | 1-164-876-81 | s | CAP,CHIP CERAMIC 120PF CH 1005 |
| C430 | 1-164-876-81 | s | CAP,CHIP CERAMIC 120PF CH 1005 |
| C431 | 1-125-777-11 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C432 | 1-125-777-11 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C433 | 1-125-777-11 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C434 | 1-125-777-11 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C435 | 1-164-882-81 | s | CAP,CHIP CERAMIC 220PF CH 1005 |
| C436 | 1-164-882-81 | s | CAP,CHIP CERAMIC 220PF CH 1005 |
| C437 | 1-115-459-21 | s | CAP, ELECT 47MF |
| C438 | 1-115-459-21 | s | CAP, ELECT 47MF |
| C439 | 1-164-882-81 | s | CAP,CHIP CERAMIC 220PF CH 1005 |
| C440 | 1-164-882-81 | s | CAP,CHIP CERAMIC 220PF CH 1005 |
| C441 | 1-164-876-81 | s | CAP,CHIP CERAMIC 120PF CH 1005 |
| C442 | 1-164-876-81 | s | CAP,CHIP CERAMIC 120PF CH 1005 |
| C443 | 1-125-777-11 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C444 | 1-125-777-11 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C445 | 1-127-956-21 | s | CAP, CHIP FILM 0.1MF (3225) |
| C446 | 1-127-956-21 | s | CAP, CHIP FILM 0.1MF (3225) |
| C447 | 1-112-015-91 | s | CAP, CHIP CERAMIC 47MF B 3225 |
| C448 | 1-112-015-91 | s | CAP, CHIP CERAMIC 47MF B 3225 |
| C449 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C450 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C451 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C452 | 1-115-339-91 | s | CAP, CERAMIC 0.1MF B (2012) |
| C453 | 1-126-405-21 | s | CAP, CHIP ELECT 10MF (6.3X5.7) |
| D1 | 8-719-989-77 | s | DIODE SC802-04-TE12RA |
| D2 | 8-719-989-77 | s | DIODE SC802-04-TE12RA |
| D3 | 8-719-037-41 | s | DIODE RD20SB-T1 |
| D4 | 8-719-037-41 | s | DIODE RD20SB-T1 |
| D5 | 8-719-017-03 | s | DIODE 02DZ4.7-TPH3 |
| D6 | 8-719-017-03 | s | DIODE 02DZ4.7-TPH3 |
| D7 | 8-719-161-05 | s | DIODE RD8.2SB-T1 |
| D8 | 8-719-161-05 | s | DIODE RD8.2SB-T1 |
| D9 | 8-719-017-03 | s | DIODE 02DZ4.7-TPH3 |
| D10 | 8-719-017-03 | s | DIODE 02DZ4.7-TPH3 |
| D11 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D12 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D201 | 8-719-024-83 | s | DIODE 1SS301-TE85L |
| D202 | 8-719-024-83 | s | DIODE 1SS301-TE85L |
| D203 | 8-719-024-83 | s | DIODE 1SS301-TE85L |
| D204 | 8-719-024-83 | s | DIODE 1SS301-TE85L |
| D205 | 8-719-036-65 | s | DIODE RD2.0SB-T1 |
| D206 | 8-719-036-65 | s | DIODE RD2.0SB-T1 |
| D207 *1 | 8-719-820-42 | s | DIODE 1SS302-TE85L |
| D301 | 8-719-024-83 | s | DIODE 1SS301-TE85L |

(AU-298 BOARD (SUFFIX 13-))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| D302 | 8-719-024-83 | s | DIODE 1SS301-TE85L |
| D303 | 8-719-024-83 | s | DIODE 1SS301-TE85L |
| D304 | 8-719-024-83 | s | DIODE 1SS301-TE85L |
| D401 | 8-719-024-83 | s | DIODE 1SS301-TE85L |
| D402 | 8-719-024-83 | s | DIODE 1SS301-TE85L |
| D403 | 8-719-024-83 | s | DIODE 1SS301-TE85L |
| D404 | 8-719-024-83 | s | DIODE 1SS301-TE85L |
| D405 | 8-719-024-83 | s | DIODE 1SS301-TE85L |
| D406 | 8-719-024-83 | s | DIODE 1SS301-TE85L |
| D407 | 6-501-363-01 | s | DIODE RD13SL-T1-A |
| D408 | 8-719-024-83 | s | DIODE 1SS301-TE85L |
| D409 | 8-719-024-83 | s | DIODE 1SS301-TE85L |
| D410 | 8-719-024-83 | s | DIODE 1SS301-TE85L |
| D411 | 8-719-024-83 | s | DIODE 1SS301-TE85L |
| D412 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D413 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D414 | 8-719-024-83 | s | DIODE 1SS301-TE85L |
| D415 | 8-719-024-83 | s | DIODE 1SS301-TE85L |
| D416 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D417 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D418 | 8-719-024-83 | s | DIODE 1SS301-TE85L |
| D419 | 8-719-024-83 | s | DIODE 1SS301-TE85L |
| D420 | 8-719-024-83 | s | DIODE 1SS301-TE85L |
| D421 | 8-719-024-83 | s | DIODE 1SS301-TE85L |
| D422 | 8-719-024-83 | s | DIODE 1SS301-TE85L |
| D423 | 8-719-024-83 | s | DIODE 1SS301-TE85L |
| D424 | 8-719-024-83 | s | DIODE 1SS301-TE85L |
| D425 | 8-719-024-83 | s | DIODE 1SS301-TE85L |
| D426 | 8-719-024-83 | s | DIODE 1SS301-TE85L |
| D427 | 8-719-024-83 | s | DIODE 1SS301-TE85L |
| E1 | 1-535-877-22 | s | CHIP, CHECKER |
| IC3 | 8-759-327-01 | s | IC NJM062V(TE2) |
| IC4 | 6-704-976-01 | s | IC ADR381ARTZ-REEL7 |
| IC5 | 8-759-327-01 | s | IC NJM062V(TE2) |
| IC11 | 8-759-672-76 | s | IC AK9813BF-E2 |
| IC12 | 8-759-672-76 | s | IC AK9813BF-E2 |
| IC13 | 8-759-672-76 | s | IC AK9813BF-E2 |
| IC15 | 8-759-327-01 | s | IC NJM062V(TE2) |
| IC16 | 8-759-327-01 | s | IC NJM062V(TE2) |
| IC18 | 8-759-296-38 | s | IC TL7705CPS-B-E20 |
| IC19 | 8-759-497-44 | s | IC TC7WH125FU(TE12R) |
| IC20 | 8-759-327-01 | s | IC NJM062V(TE2) |
| IC21 | 8-759-327-01 | s | IC NJM062V(TE2) |
| IC201 | 8-759-278-58 | s | IC NJM4558V-TE2 |
| IC202 | 8-759-441-31 | s | IC MC14053BDTR2 |
| IC203 | 8-759-278-58 | s | IC NJM4558V-TE2 |
| IC204 | 8-759-359-49 | s | IC NJM3414AV(TE2) |
| IC205 | 8-759-278-58 | s | IC NJM4558V-TE2 |
| IC206 | 8-759-085-05 | s | IC M51132FP-E1 |
| IC207 | 8-759-564-49 | s | IC TC7W53FU(TE12R) |
| IC208 | 8-759-422-21 | s | IC NJM4580V(TE2) |
| IC209 | 8-759-422-21 | s | IC NJM4580V(TE2) |
| IC301 | 8-759-278-58 | s | IC NJM4558V-TE2 |
| IC302 | 8-759-441-31 | s | IC MC14053BDTR2 |
| IC303 | 8-759-278-58 | s | IC NJM4558V-TE2 |
| IC304 | 8-759-422-21 | s | IC NJM4580V(TE2) |
| IC305 | 8-759-327-01 | s | IC NJM062V(TE2) |
| IC306 | 8-759-422-21 | s | IC NJM4580V(TE2) |

(AU-298 BOARD (SUFFIX 13-))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| IC307 | 8-759-327-01 | s | IC NJM062V(TE2) |
| IC308 | 8-759-564-49 | s | IC TC7W53FU(TE12R) |
| IC401 | 8-759-441-31 | s | IC MC14053BDTR2 |
| IC402 | 8-759-278-58 | s | IC NJM4558V-TE2 |
| IC411 | 8-759-441-31 | s | IC MC14053BDTR2 |
| IC412 | 8-759-278-58 | s | IC NJM4558V-TE2 |
| JC1 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| JC2 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| JC3 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| JC4 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| JC5 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| JC6 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| JC7 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| JC8 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| JC9 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| JC10 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| JC11 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| JC12 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| JC13 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| JC14 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| JC15 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| JC16 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| JC17 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| JC18 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| JC19 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| JC20 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| JC21 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| JC22 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| JC23 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| JC24 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| JC25 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| JC26 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| JC27 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| JC28 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| JC29 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| JC30 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| JC201 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| JC202 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| L1 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L2 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L3 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L4 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L5 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L7 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L8 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L9 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L10 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L201 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L202 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| Q1 | 8-729-927-99 | s | TRANSISTOR 2SC4617TL-QR |
| Q2 | 8-729-927-99 | s | TRANSISTOR 2SC4617TL-QR |
| Q3 | 8-729-230-27 | s | TRANSISTOR 2SA1213Y-TE12L |
| Q4 | 8-729-209-77 | s | TRANSISTOR 2SC2873Y-TE12L |
| Q5 | 8-729-209-77 | s | TRANSISTOR 2SC2873Y-TE12L |
| Q6 | 8-729-209-77 | s | TRANSISTOR 2SC2873Y-TE12L |
| Q7 | 8-729-230-27 | s | TRANSISTOR 2SA1213Y-TE12L |
| Q8 | 8-729-209-77 | s | TRANSISTOR 2SC2873Y-TE12L |

(AU-298 BOARD (SUFFIX 13-))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| Q9 | 8-729-053-44 | s | TRANSISTOR 2SK880GR-TE85L |
| Q10 | 8-729-053-44 | s | TRANSISTOR 2SK880GR-TE85L |
| Q201 | 8-729-928-82 | s | TRANSISTOR DTC144EE-TL |
| Q202 | 8-729-928-82 | s | TRANSISTOR DTC144EE-TL |
| Q203 | 8-729-928-82 | s | TRANSISTOR DTC144EE-TL |
| Q204 | 8-729-928-19 | s | TRANSISTOR 2SA1774TL-QR |
| Q207 | 8-729-927-99 | s | TRANSISTOR 2SC4617TL-QR |
| Q208 | 8-729-053-44 | s | TRANSISTOR 2SK880GR-TE85L |
| Q209 | 8-729-053-44 | s | TRANSISTOR 2SK880GR-TE85L |
| Q210 | 8-729-053-44 | s | TRANSISTOR 2SK880GR-TE85L |
| Q211 | 8-729-053-44 | s | TRANSISTOR 2SK880GR-TE85L |
| Q212 | 8-729-053-44 | s | TRANSISTOR 2SK880GR-TE85L |
| Q214 | 8-729-927-99 | s | TRANSISTOR 2SC4617TL-QR |
| Q215 | 8-729-927-99 | s | TRANSISTOR 2SC4617TL-QR |
| Q216 | 8-729-927-99 | s | TRANSISTOR 2SC4617TL-QR |
| Q217 | 8-729-928-19 | s | TRANSISTOR 2SA1774TL-QR |
| Q218 | 8-729-928-82 | s | TRANSISTOR DTC144EE-TL |
| Q219 | 8-729-928-82 | s | TRANSISTOR DTC144EE-TL |
| Q220 | 8-729-927-99 | s | TRANSISTOR 2SC4617TL-QR |
| Q301 | 8-729-928-82 | s | TRANSISTOR DTC144EE-TL |
| Q302 | 8-729-928-82 | s | TRANSISTOR DTC144EE-TL |
| Q303 | 8-729-928-82 | s | TRANSISTOR DTC144EE-TL |
| Q304 | 8-729-928-19 | s | TRANSISTOR 2SA1774TL-QR |
| Q307 | 8-729-927-99 | s | TRANSISTOR 2SC4617TL-QR |
| Q308 | 8-729-053-44 | s | TRANSISTOR 2SK880GR-TE85L |
| Q309 | 8-729-053-44 | s | TRANSISTOR 2SK880GR-TE85L |
| Q310 | 8-729-053-44 | s | TRANSISTOR 2SK880GR-TE85L |
| Q311 | 8-729-053-44 | s | TRANSISTOR 2SK880GR-TE85L |
| Q312 | 8-729-053-44 | s | TRANSISTOR 2SK880GR-TE85L |
| Q314 | 8-729-927-99 | s | TRANSISTOR 2SC4617TL-QR |
| Q315 | 8-729-927-99 | s | TRANSISTOR 2SC4617TL-QR |
| Q316 | 8-729-927-99 | s | TRANSISTOR 2SC4617TL-QR |
| Q317 | 8-729-928-19 | s | TRANSISTOR 2SA1774TL-QR |
| Q320 | 8-729-927-99 | s | TRANSISTOR 2SC4617TL-QR |
| Q401 | 8-729-209-77 | s | TRANSISTOR 2SC2873Y-TE12L |
| Q402 | 8-729-928-82 | s | TRANSISTOR DTC144EE-TL |
| Q403 | 8-729-928-82 | s | TRANSISTOR DTC144EE-TL |
| Q404 | 8-729-928-82 | s | TRANSISTOR DTC144EE-TL |
| Q405 | 8-729-928-82 | s | TRANSISTOR DTC144EE-TL |
| Q406 | 8-729-928-82 | s | TRANSISTOR DTC144EE-TL |
| Q407 | 8-729-928-82 | s | TRANSISTOR DTC144EE-TL |
| Q408 | 8-729-928-82 | s | TRANSISTOR DTC144EE-TL |
| Q409 | 8-729-928-19 | s | TRANSISTOR 2SA1774TL-QR |
| Q410 | 8-729-927-99 | s | TRANSISTOR 2SC4617TL-QR |
| Q411 | 8-729-928-82 | s | TRANSISTOR DTC144EE-TL |
| Q412 | 8-729-928-82 | s | TRANSISTOR DTC144EE-TL |
| Q413 | 8-729-928-82 | s | TRANSISTOR DTC144EE-TL |
| Q414 | 8-729-928-82 | s | TRANSISTOR DTC144EE-TL |
| Q415 | 8-729-928-82 | s | TRANSISTOR DTC144EE-TL |
| Q416 | 8-729-928-19 | s | TRANSISTOR 2SA1774TL-QR |
| Q417 | 8-729-928-19 | s | TRANSISTOR 2SA1774TL-QR |
| Q418 | 8-729-928-19 | s | TRANSISTOR 2SA1774TL-QR |
| Q419 | 8-729-928-19 | s | TRANSISTOR 2SA1774TL-QR |
| Q420 | 8-729-928-82 | s | TRANSISTOR DTC144EE-TL |
| Q421 | 8-729-928-82 | s | TRANSISTOR DTC144EE-TL |
| Q422 | 8-729-928-19 | s | TRANSISTOR 2SA1774TL-QR |
| Q423 | 8-729-927-99 | s | TRANSISTOR 2SC4617TL-QR |
| Q428 | 8-729-053-44 | s | TRANSISTOR 2SK880GR-TE85L |
| Q429 | 8-729-053-44 | s | TRANSISTOR 2SK880GR-TE85L |

(AU-298 BOARD (SUFFIX 13-))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| Q430 | 8-729-053-44 | s | TRANSISTOR 2SK880GR-TE85L |
| Q431 | 8-729-053-44 | s | TRANSISTOR 2SK880GR-TE85L |
| Q432 | 8-729-053-44 | s | TRANSISTOR 2SK880GR-TE85L |
| Q433 | 8-729-053-44 | s | TRANSISTOR 2SK880GR-TE85L |
| Q434 | 8-729-053-44 | s | TRANSISTOR 2SK880GR-TE85L |
| Q435 | 8-729-053-44 | s | TRANSISTOR 2SK880GR-TE85L |
| Q436 | 8-729-053-44 | s | TRANSISTOR 2SK880GR-TE85L |
| Q437 | 8-729-053-44 | s | TRANSISTOR 2SK880GR-TE85L |
| Q444 | 8-729-927-99 | s | TRANSISTOR 2SC4617TL-QR |
| Q445 | 8-729-928-19 | s | TRANSISTOR 2SA1774TL-QR |
| Q446 | 8-729-927-99 | s | TRANSISTOR 2SC4617TL-QR |
| Q447 | 8-729-928-19 | s | TRANSISTOR 2SA1774TL-QR |
| Q448 | 8-729-928-82 | s | TRANSISTOR DTC144EE-TL |
| Q449 | 8-729-209-77 | s | TRANSISTOR 2SC2873Y-TE12L |
| R4 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R5 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R6 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R7 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R8 | 1-208-643-11 | s | RES, CHIP 22 (1005) |
| R9 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R10 | 1-208-643-11 | s | RES, CHIP 22 (1005) |
| R11 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R12 | 1-218-945-11 | s | RES, CHIP 220 (1005) |
| R13 | 1-218-945-11 | s | RES, CHIP 220 (1005) |
| R18 | 1-218-945-11 | s | RES, CHIP 220 (1005) |
| R19 | 1-218-945-11 | s | RES, CHIP 220 (1005) |
| R20 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R21 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R22 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R23 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R24 | 1-218-945-11 | s | RES, CHIP 220 (1005) |
| R25 | 1-218-945-11 | s | RES, CHIP 220 (1005) |
| R26 | 1-208-931-81 | s | RES, CHIP 68K (1005) |
| R27 | 1-208-931-81 | s | RES, CHIP 68K (1005) |
| R28 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R29 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R30 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R31 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R32 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R33 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R34 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R35 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R36 | 1-208-931-81 | s | RES, CHIP 68K (1005) |
| R37 | 1-208-931-81 | s | RES, CHIP 68K (1005) |
| R38 | 1-208-931-81 | s | RES, CHIP 68K (1005) |
| R39 | 1-208-931-81 | s | RES, CHIP 68K (1005) |
| R40 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R41 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R42 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R43 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R44 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R45 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R46 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R47 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R48 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R49 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R50 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R51 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R52 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |

(AU-298 BOARD (SUFFIX 13-))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R53 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R54 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R55 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R56 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R57 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R58 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R59 | 1-208-715-11 | s | RES, CHIP 22K (1005) |
| R60 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R61 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R62 | 1-208-691-11 | s | RES, CHIP 2.2K (1005) |
| R63 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R64 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R65 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R66 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R67 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R68 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R69 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R70 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R71 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R72 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R73 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R74 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R75 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R76 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R77 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R78 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R79 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R80 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R81 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R82 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R83 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R84 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R85 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R86 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R87 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R88 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R90 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R94 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R95 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R96 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R97 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R98 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R99 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R201 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R202 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R203 | 1-208-699-11 | s | RES, CHIP 4.7K (1005) |
| R204 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R205 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R206 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R207 *1 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| *2 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R208 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R209 | 1-208-699-11 | s | RES, CHIP 4.7K (1005) |
| R210 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R211 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R212 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R213 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R214 | 1-208-715-11 | s | RES, CHIP 22K (1005) |
| R215 | 1-208-699-11 | s | RES, CHIP 4.7K (1005) |

(AU-298 BOARD (SUFFIX 13-))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R216 | 1-208-699-11 | s | RES, CHIP 4.7K (1005) |
| R217 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R218 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R219 | 1-208-715-11 | s | RES, CHIP 22K (1005) |
| R220 | 1-208-715-11 | s | RES, CHIP 22K (1005) |
| R221 | 1-208-695-11 | s | RES, CHIP 3.3K (1005) |
| R222 | 1-208-695-11 | s | RES, CHIP 3.3K (1005) |
| R223 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R224 | 1-208-635-11 | s | RES, CHIP 10 (1005) |
| R225 | 1-243-975-81 | s | RES, CHIP 4.7M (1005) |
| R226 | 1-243-975-81 | s | RES, CHIP 4.7M (1005) |
| R227 | 1-243-975-81 | s | RES, CHIP 4.7M (1005) |
| R228 | 1-243-975-81 | s | RES, CHIP 4.7M (1005) |
| R229 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R230 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R231 | 1-208-691-11 | s | RES, CHIP 2.2K (1005) |
| R232 | 1-208-699-11 | s | RES, CHIP 4.7K (1005) |
| R233 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R234 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R235 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R236 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R237 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R238 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R239 | 1-208-695-11 | s | RES, CHIP 3.3K (1005) |
| R240 | 1-208-695-11 | s | RES, CHIP 3.3K (1005) |
| R241 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R242 | 1-208-715-11 | s | RES, CHIP 22K (1005) |
| R243 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R244 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R245 | 1-208-635-11 | s | RES, CHIP 10 (1005) |
| R246 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R247 | 1-208-699-11 | s | RES, CHIP 4.7K (1005) |
| R248 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R250 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R251 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R253 | 1-208-715-11 | s | RES, CHIP 22K (1005) |
| R254 | 1-208-715-11 | s | RES, CHIP 22K (1005) |
| R257 | 1-208-715-11 | s | RES, CHIP 22K (1005) |
| R258 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R259 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R260 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R261 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R262 | 1-208-715-11 | s | RES, CHIP 22K (1005) |
| R265 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R266 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R267 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R268 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R269 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R270 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R271 | 1-218-985-11 | s | RES, CHIP 470K (1005) |
| R272 | 1-218-985-11 | s | RES, CHIP 470K (1005) |
| R273 | 1-208-635-11 | s | RES, CHIP 10 (1005) |
| R274 | 1-208-635-11 | s | RES, CHIP 10 (1005) |
| R275 | 1-208-635-11 | s | RES, CHIP 10 (1005) |
| R276 | 1-208-635-11 | s | RES, CHIP 10 (1005) |
| R277 | 1-208-635-11 | s | RES, CHIP 10 (1005) |
| R278 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R279 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R280 | 1-218-985-11 | s | RES, CHIP 470K (1005) |

(AU-298 BOARD (SUFFIX 13-))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R281 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R282 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R283 | 1-218-985-11 | s | RES, CHIP 470K (1005) |
| R284 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R285 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R286 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R287 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R288 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R289 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R290 | 1-208-715-11 | s | RES, CHIP 22K (1005) |
| R291 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R292 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R293 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R294 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R295 | 1-208-715-11 | s | RES, CHIP 22K (1005) |
| R296 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R297 | 1-208-715-11 | s | RES, CHIP 22K (1005) |
| R298 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R299 | 1-208-715-11 | s | RES, CHIP 22K (1005) |
| R301 | 1-208-699-11 | s | RES, CHIP 4.7K (1005) |
| R302 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R303 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R304 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R305 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R306 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R307 | 1-208-699-11 | s | RES, CHIP 4.7K (1005) |
| R308 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R309 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R310 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R311 | 1-208-699-11 | s | RES, CHIP 4.7K (1005) |
| R312 | 1-208-699-11 | s | RES, CHIP 4.7K (1005) |
| R313 | 1-208-715-11 | s | RES, CHIP 22K (1005) |
| R314 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R315 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R316 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R317 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R318 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R320 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R322 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R323 | 1-208-715-11 | s | RES, CHIP 22K (1005) |
| R324 | 1-208-715-11 | s | RES, CHIP 22K (1005) |
| R325 | 1-208-695-11 | s | RES, CHIP 3.3K (1005) |
| R326 | 1-208-695-11 | s | RES, CHIP 3.3K (1005) |
| R327 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R328 | 1-208-635-11 | s | RES, CHIP 10 (1005) |
| R329 | 1-243-975-81 | s | RES, CHIP 4.7M (1005) |
| R330 | 1-243-975-81 | s | RES, CHIP 4.7M (1005) |
| R331 | 1-243-975-81 | s | RES, CHIP 4.7M (1005) |
| R332 | 1-243-975-81 | s | RES, CHIP 4.7M (1005) |
| R333 | 1-208-635-11 | s | RES, CHIP 10 (1005) |
| R334 | 1-208-635-11 | s | RES, CHIP 10 (1005) |
| R335 | 1-208-635-11 | s | RES, CHIP 10 (1005) |
| R336 | 1-208-635-11 | s | RES, CHIP 10 (1005) |
| R337 | 1-218-985-11 | s | RES, CHIP 470K (1005) |
| R338 | 1-218-985-11 | s | RES, CHIP 470K (1005) |
| R339 | 1-208-699-11 | s | RES, CHIP 4.7K (1005) |
| R340 | 1-208-699-11 | s | RES, CHIP 4.7K (1005) |
| R341 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R342 | 1-208-911-81 | s | RES, CHIP 10K (1005) |

(AU-298 BOARD (SUFFIX 13-))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R343 | 1-208-691-11 | s | RES, CHIP 2.2K (1005) |
| R344 | 1-208-699-11 | s | RES, CHIP 4.7K (1005) |
| R345 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R346 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R347 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R348 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R349 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R350 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R351 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R352 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R353 | 1-208-695-11 | s | RES, CHIP 3.3K (1005) |
| R354 | 1-208-695-11 | s | RES, CHIP 3.3K (1005) |
| R355 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R356 | 1-208-715-11 | s | RES, CHIP 22K (1005) |
| R357 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R358 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R359 | 1-208-635-11 | s | RES, CHIP 10 (1005) |
| R360 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R361 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R362 | 1-208-721-11 | s | RES, CHIP 39K (1005) |
| R363 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R364 | 1-208-721-11 | s | RES, CHIP 39K (1005) |
| R365 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R366 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R367 | 1-208-699-11 | s | RES, CHIP 4.7K (1005) |
| R368 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R369 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R370 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R371 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R372 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R373 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R374 | 1-208-715-11 | s | RES, CHIP 22K (1005) |
| R375 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R376 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R377 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R378 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R379 | 1-208-715-11 | s | RES, CHIP 22K (1005) |
| R380 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R381 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R382 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R383 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R384 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R385 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R386 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R387 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R388 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R389 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R390 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R392 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R394 | 1-208-635-11 | s | RES, CHIP 10 (1005) |
| R395 | 1-208-699-11 | s | RES, CHIP 4.7K (1005) |
| R396 | 1-208-715-11 | s | RES, CHIP 22K (1005) |
| R397 | 1-208-715-11 | s | RES, CHIP 22K (1005) |
| R398 | 1-208-715-11 | s | RES, CHIP 22K (1005) |
| R399 | 1-208-715-11 | s | RES, CHIP 22K (1005) |
| R401 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R402 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R403 | 1-208-635-11 | s | RES, CHIP 10 (1005) |
| R404 | 1-208-635-11 | s | RES, CHIP 10 (1005) |

(AU-298 BOARD (SUFFIX 13-))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R405 | 1-208-635-11 | s | RES, CHIP 10 (1005) |
| R406 | 1-220-264-91 | s | RES,SQUARE TYPE CHIP 1.0K 3225 |
| R407 | 1-208-715-11 | s | RES, CHIP 22K (1005) |
| R408 | 1-208-691-11 | s | RES, CHIP 2.2K (1005) |
| R409 | 1-208-691-11 | s | RES, CHIP 2.2K (1005) |
| R410 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R411 | 1-208-691-11 | s | RES, CHIP 2.2K (1005) |
| R412 | 1-208-691-11 | s | RES, CHIP 2.2K (1005) |
| R413 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R414 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R415 | 1-208-715-11 | s | RES, CHIP 22K (1005) |
| R416 | 1-208-715-11 | s | RES, CHIP 22K (1005) |
| R417 | 1-208-715-11 | s | RES, CHIP 22K (1005) |
| R418 | 1-208-943-81 | s | RES, CHIP 220K (1005) |
| R419 | 1-208-943-81 | s | RES, CHIP 220K (1005) |
| R420 | 1-208-943-81 | s | RES, CHIP 220K (1005) |
| R421 | 1-208-943-81 | s | RES, CHIP 220K (1005) |
| R422 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R423 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R424 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R425 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R426 | 1-208-715-11 | s | RES, CHIP 22K (1005) |
| R427 | 1-208-943-81 | s | RES, CHIP 220K (1005) |
| R428 | 1-208-943-81 | s | RES, CHIP 220K (1005) |
| R429 | 1-208-943-81 | s | RES, CHIP 220K (1005) |
| R430 | 1-208-943-81 | s | RES, CHIP 220K (1005) |
| R431 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R432 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R433 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R434 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R435 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R436 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R437 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R438 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R439 | 1-220-264-91 | s | RES,SQUARE TYPE CHIP 1.0K 3225 |
| R440 | 1-220-264-91 | s | RES,SQUARE TYPE CHIP 1.0K 3225 |
| R441 | 1-220-264-91 | s | RES,SQUARE TYPE CHIP 1.0K 3225 |
| R442 | 1-220-264-91 | s | RES,SQUARE TYPE CHIP 1.0K 3225 |
| R443 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R444 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R445 | 1-220-281-91 | s | RES,SQUARE TYPE CHIP 4.7K 3225 |
| R446 | 1-220-281-91 | s | RES,SQUARE TYPE CHIP 4.7K 3225 |
| R447 | 1-220-281-91 | s | RES,SQUARE TYPE CHIP 4.7K 3225 |
| R448 | 1-220-281-91 | s | RES,SQUARE TYPE CHIP 4.7K 3225 |
| R449 | 1-220-281-91 | s | RES,SQUARE TYPE CHIP 4.7K 3225 |
| R450 | 1-220-281-91 | s | RES,SQUARE TYPE CHIP 4.7K 3225 |
| R451 | 1-220-281-91 | s | RES,SQUARE TYPE CHIP 4.7K 3225 |
| R452 | 1-220-281-91 | s | RES,SQUARE TYPE CHIP 4.7K 3225 |
| R453 | 1-208-715-11 | s | RES, CHIP 22K (1005) |
| R454 | 1-208-715-11 | s | RES, CHIP 22K (1005) |
| R455 | 1-208-875-81 | s | RES, CHIP 330 (1005) |
| R456 | 1-220-874-81 | s | RES, CHIP 15 (1005) |
| R457 | 1-208-875-81 | s | RES, CHIP 330 (1005) |
| R458 | 1-208-715-11 | s | RES, CHIP 22K (1005) |
| R459 | 1-208-875-81 | s | RES, CHIP 330 (1005) |
| R460 | 1-220-874-81 | s | RES, CHIP 15 (1005) |
| R461 | 1-208-875-81 | s | RES, CHIP 330 (1005) |
| R462 | 1-208-875-81 | s | RES, CHIP 330 (1005) |
| R463 | 1-220-874-81 | s | RES, CHIP 15 (1005) |

(AU-298 BOARD (SUFFIX 13-))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R464 | 1-208-715-11 | s | RES, CHIP 22K (1005) |
| R465 | 1-208-875-81 | s | RES, CHIP 330 (1005) |
| R466 | 1-208-875-81 | s | RES, CHIP 330 (1005) |
| R467 | 1-220-874-81 | s | RES, CHIP 15 (1005) |
| R468 | 1-208-875-81 | s | RES, CHIP 330 (1005) |
| R469 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R470 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R471 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R472 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R473 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R474 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R475 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R476 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R477 | 1-208-635-11 | s | RES, CHIP 10 (1005) |
| R478 | 1-208-715-11 | s | RES, CHIP 22K (1005) |
| R479 | 1-208-635-11 | s | RES, CHIP 10 (1005) |
| R480 | 1-208-715-11 | s | RES, CHIP 22K (1005) |
| R481 | 1-208-695-11 | s | RES, CHIP 3.3K (1005) |
| R482 | 1-208-695-11 | s | RES, CHIP 3.3K (1005) |
| R483 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R484 | 1-208-695-11 | s | RES, CHIP 3.3K (1005) |
| R485 | 1-208-695-11 | s | RES, CHIP 3.3K (1005) |
| R486 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R487 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R488 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R489 | 1-243-975-81 | s | RES, CHIP 4.7M (1005) |
| R490 | 1-243-975-81 | s | RES, CHIP 4.7M (1005) |
| R491 | 1-243-975-81 | s | RES, CHIP 4.7M (1005) |
| R492 | 1-243-975-81 | s | RES, CHIP 4.7M (1005) |
| R493 | 1-243-975-81 | s | RES, CHIP 4.7M (1005) |
| R494 | 1-243-975-81 | s | RES, CHIP 4.7M (1005) |
| R495 | 1-243-975-81 | s | RES, CHIP 4.7M (1005) |
| R496 | 1-243-975-81 | s | RES, CHIP 4.7M (1005) |
| R497 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R498 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R499 | 1-208-691-11 | s | RES, CHIP 2.2K (1005) |
| R500 | 1-208-699-11 | s | RES, CHIP 4.7K (1005) |
| R501 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R502 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R503 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R504 | 1-208-691-11 | s | RES, CHIP 2.2K (1005) |
| R505 | 1-208-699-11 | s | RES, CHIP 4.7K (1005) |
| R506 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R507 | 1-208-635-11 | s | RES, CHIP 10 (1005) |
| R508 | 1-208-635-11 | s | RES, CHIP 10 (1005) |
| R509 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R510 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R511 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R512 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R513 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R514 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R515 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R516 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R517 | 1-208-695-11 | s | RES, CHIP 3.3K (1005) |
| R518 | 1-208-695-11 | s | RES, CHIP 3.3K (1005) |
| R519 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R520 | 1-208-695-11 | s | RES, CHIP 3.3K (1005) |
| R521 | 1-208-695-11 | s | RES, CHIP 3.3K (1005) |
| R522 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |

(AU-298 BOARD (SUFFIX 13-))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R523 | 1-208-715-11 | s | RES, CHIP 22K (1005) |
| R524 | 1-208-715-11 | s | RES, CHIP 22K (1005) |
| R525 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R526 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R527 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R528 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R529 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R530 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R531 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R532 | 1-208-699-11 | s | RES, CHIP 4.7K (1005) |
| R533 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R534 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R535 | 1-208-699-11 | s | RES, CHIP 4.7K (1005) |
| R536 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R537 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R538 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R539 | 1-208-715-11 | s | RES, CHIP 22K (1005) |
| R540 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R541 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R542 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R543 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R544 | 1-208-715-11 | s | RES, CHIP 22K (1005) |
| R545 | 1-208-715-11 | s | RES, CHIP 22K (1005) |
| R546 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R547 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R548 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R549 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R550 | 1-208-715-11 | s | RES, CHIP 22K (1005) |
| R551 | 1-208-635-11 | s | RES, CHIP 10 (1005) |
| R552 | 1-208-635-11 | s | RES, CHIP 10 (1005) |
| R553 | 1-208-715-11 | s | RES, CHIP 22K (1005) |
| R554 | 1-208-635-11 | s | RES, CHIP 10 (1005) |
| R555 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R556 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R561 | 1-208-635-11 | s | RES, CHIP 10 (1005) |
| R562 | 1-208-635-11 | s | RES, CHIP 10 (1005) |
| R563 | 1-220-264-91 | s | RES,SQUARE TYPE CHIP 1.0K 3225 |
| R564 | 1-208-699-11 | s | RES, CHIP 4.7K (1005) |
| R565 | 1-208-699-11 | s | RES, CHIP 4.7K (1005) |
| R566 | 1-208-635-11 | s | RES, CHIP 10 (1005) |
| R601 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R602 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R603 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R604 | *1 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R605 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R606 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R607 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R608 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R609 | 1-208-715-11 | s | RES, CHIP 22K (1005) |
| R610 | 1-208-943-81 | s | RES, CHIP 220K (1005) |
| R611 | 1-208-943-81 | s | RES, CHIP 220K (1005) |
| R613 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R614 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R615 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R616 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R617 | 1-218-985-11 | s | RES, CHIP 470K (1005) |
| R618 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R619 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R620 | 1-218-941-11 | s | RES, CHIP 100 (1005) |

(AU-298 BOARD (SUFFIX 13-))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R621 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R622 | 1-208-943-81 | s | RES, CHIP 220K (1005) |
| R623 | 1-208-943-81 | s | RES, CHIP 220K (1005) |
| R624 | 1-208-699-11 | s | RES, CHIP 4.7K (1005) |
| R625 | 1-208-635-11 | s | RES, CHIP 10 (1005) |
| R650 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R651 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R659 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R660 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R662 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R663 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R668 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R669 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R670 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R671 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R672 | 1-208-943-81 | s | RES, CHIP 220K (1005) |
| R673 | 1-208-943-81 | s | RES, CHIP 220K (1005) |
| R674 | 1-208-699-11 | s | RES, CHIP 4.7K (1005) |
| R675 | 1-208-635-11 | s | RES, CHIP 10 (1005) |
| RV1 | 1-225-811-21 | s | RES, ADJ, CERMET 20K |
| RV2 | 1-225-811-21 | s | RES, ADJ, CERMET 20K |
| S1 | 1-762-217-31 | s | SWITCH, SLIDE |
| S2 | 1-762-217-31 | s | SWITCH, SLIDE |
| S3 | 1-692-881-41 | s | SWITCH, SLIDE |
| THP3 | ⚠ 1-803-353-21 | s | THERMISTOR, POSITIVE |
| THP4 | ⚠ 1-803-353-21 | s | THERMISTOR, POSITIVE |
| THP6 | ⚠ 1-803-353-21 | s | THERMISTOR, POSITIVE |
| THP7 | ⚠ 1-803-353-21 | s | THERMISTOR, POSITIVE |

---

BI-175 BOARD

---

*1: [Board No. suffix 11]
*2: [Board No. suffix 12-]

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| 3pcs | A-1137-932-A | s | MOUNTED CIRCUIT BOARD, BI-175 |
| C1 | 1-135-342-11 | s | CAPACITOR,SOLID ELECT 56MF |
| C2 *1 | 1-100-352-91 | s | CAP, CHIP CERAMIC 1MF B (1608) |
| *2 | 1-112-298-91 | o | CAP, CERAMIC 1MF B (1608) |
| C3 *1 | 1-100-352-91 | s | CAP, CHIP CERAMIC 1MF B (1608) |
| *2 | 1-112-298-91 | o | CAP, CERAMIC 1MF B (1608) |
| C5 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C6 | 1-164-874-11 | s | CAPACITOR,CHIP CERAMIC 100PF |
| C7 | 1-100-503-11 | s | CAPACITOR,CERAMIC 4.7MF B 2012 |
| C8 | 1-164-862-11 | s | CAPACITOR,CHIP CERAMIC 33PF/50 |
| C9 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C11 | 1-164-156-11 | s | CAPACITOR,CERAMIC 0.1MF/25V F |
| C12 | 1-164-858-11 | s | CAPACITOR,CERAMIC 22PF/50V |
| C13 | 1-164-156-11 | s | CAPACITOR,CERAMIC 0.1MF/25V F |
| C15 *2 | 1-112-298-91 | o | CAP, CERAMIC 1MF B (1608) |
| C16 | 1-100-503-11 | s | CAPACITOR,CERAMIC 4.7MF B 2012 |
| C17 | 1-100-503-11 | s | CAPACITOR,CERAMIC 4.7MF B 2012 |
| C18 | 1-100-503-11 | s | CAPACITOR,CERAMIC 4.7MF B 2012 |
| C19 | 1-100-503-11 | s | CAPACITOR,CERAMIC 4.7MF B 2012 |
| C20 | 1-127-692-91 | s | CAP, CHIP CERAMIC 10MF B 3216 |
| C22 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C26 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C27 *1 | 1-100-352-91 | s | CAP, CHIP CERAMIC 1MF B (1608) |
| *2 | 1-112-298-91 | o | CAP, CERAMIC 1MF B (1608) |
| C28 | 1-165-629-11 | s | CAPACITOR,CERAMIC 1MF B |
| C29 | 1-165-629-11 | s | CAPACITOR,CERAMIC 1MF B |
| C30 | 1-165-629-11 | s | CAPACITOR,CERAMIC 1MF B |
| C31 | 1-165-629-11 | s | CAPACITOR,CERAMIC 1MF B |
| C32 | 1-135-960-91 | s | CAP, CHIP CERAMIC 10MF B(3225) |
| C33 | 1-135-960-91 | s | CAP, CHIP CERAMIC 10MF B(3225) |
| C34 | 1-135-960-91 | s | CAP, CHIP CERAMIC 10MF B(3225) |
| C35 | 1-127-692-91 | s | CAP, CHIP CERAMIC 10MF B 3216 |
| C36 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C37 | 1-127-692-91 | s | CAP, CHIP CERAMIC 10MF B 3216 |
| C38 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C39 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C40 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C41 | 1-164-840-11 | s | CAPACITOR,CHIP CERAMIC 1.5PF |
| C42 | 1-164-840-11 | s | CAPACITOR,CHIP CERAMIC 1.5PF |
| C43 | 1-164-843-11 | s | CAPACITOR,CHIP CERAMIC 3PF/50V |
| C44 | 1-164-843-11 | s | CAPACITOR,CHIP CERAMIC 3PF/50V |
| CN2 | 1-770-622-21 | s | PIN, CONNECTOR 5P |
| D1 | 8-719-210-43 | s | DIODE EC10QS06 |
| D3 | 8-719-421-27 | s | DIODE MA728 |
| D4 | 8-719-421-27 | s | DIODE MA728 |
| D5 | 8-719-059-51 | s | DIODE MA3J142E0LSO |
| D6 | 8-719-059-51 | s | DIODE MA3J142E0LSO |
| IC1 | 8-759-346-27 | s | IC LM45BIM3X |
| IC2 | 8-759-243-47 | s | IC TC74ACT04F |
| IC3 | 8-759-243-47 | s | IC TC74ACT04F |
| IC5 | 6-706-863-01 | s | IC LMH6732MFX/NOPB |
| IC6 | 6-706-863-01 | s | IC LMH6732MFX/NOPB |
| LV1 | 1-456-991-11 | s | COIL, VARIABLE |
| LV2 | 1-456-991-11 | s | COIL, VARIABLE |
| Q1 | 8-729-421-71 | s | TRANSISTOR 2SK620 |

(BI-175 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R1 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R2 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R3 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R4 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R5 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R6 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R8 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R9 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R10 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R11 | 1-208-893-11 | s | RESISTOR, CHIP 1.8K (1005) |
| R12 | 1-208-905-11 | s | RESISTOR, CHIP 5.6K (1005) |
| R17 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R18 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R19 | 1-208-905-11 | s | RESISTOR, CHIP 5.6K (1005) |
| R20 | 1-208-695-11 | s | RESISTOR CHIP 3.3K 1/16W(1005) |
| R21 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R22 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R23 | 1-218-989-11 | s | RESISTOR,CHIP 1M 1/16W (1005) |
| R24 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R25 | 1-218-989-11 | s | RESISTOR,CHIP 1M 1/16W (1005) |
| R26 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R27 *1 | 1-208-675-11 | s | RESISTOR CHIP 470 1/16W (1005) |
| *2 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R28 *1 | 1-208-675-11 | s | RESISTOR CHIP 470 1/16W (1005) |
| *2 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R29 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R30 | 1-208-905-11 | s | RESISTOR, CHIP 5.6K (1005) |
| R31 | 1-208-695-11 | s | RESISTOR CHIP 3.3K 1/16W(1005) |
| R32 | 1-208-699-11 | s | RESISTOR,CHIP 4.7K 1/16W(1005) |
| R33 | 1-208-695-11 | s | RESISTOR CHIP 3.3K 1/16W(1005) |
| R34 | 1-208-643-11 | s | RESISTOR CHIP 22 1/16W (1005) |
| R35 *2 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R36 *2 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R37 | 1-208-643-11 | s | RESISTOR CHIP 22 1/16W (1005) |
| R40 | 1-208-931-11 | s | RESISTOR, CHIP 68K (1005) |
| R41 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R42 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R43 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R44 | 1-208-931-11 | s | RESISTOR, CHIP 68K (1005) |
| R45 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R46 | 1-208-931-11 | s | RESISTOR, CHIP 68K (1005) |
| R47 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R48 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R49 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R50 | 1-208-931-11 | s | RESISTOR, CHIP 68K (1005) |
| R51 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R52 | 1-208-677-11 | s | RESISTOR CHIP 560 1/16W (1005) |
| R53 | 1-208-677-11 | s | RESISTOR CHIP 560 1/16W (1005) |

---

BI-187 BOARD

---

*1: [Board No. suffix 11]
*2: [Board No. suffix 12-]

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| 1pc | A-1099-207-A | s | MOUNTED CIRCUIT BOARD, BI-187 |
| C1 | 1-135-342-11 | s | CAPACITOR,SOLID ELECT 56MF |
| C2 *1 | 1-100-352-91 | s | CAP, CHIP CERAMIC 1MF B (1608) |
| *2 | 1-112-298-91 | o | CAP, CERAMIC 1MF B (1608) |
| C3 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C4 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C5 | 1-164-874-11 | s | CAPACITOR,CHIP CERAMIC 100PF |
| C6 | 1-100-503-11 | s | CAPACITOR,CERAMIC 4.7MF B 2012 |
| C7 | 1-164-862-11 | s | CAPACITOR,CHIP CERAMIC 33PF/50 |
| C8 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C9 | 1-164-156-11 | s | CAPACITOR,CERAMIC 0.1MF/25V F |
| C10 | 1-164-156-11 | s | CAPACITOR,CERAMIC 0.1MF/25V F |
| C11 | 1-164-156-11 | s | CAPACITOR,CERAMIC 0.1MF/25V F |
| C13 | 1-100-503-11 | s | CAPACITOR,CERAMIC 4.7MF B 2012 |
| C14 | 1-100-503-11 | s | CAPACITOR,CERAMIC 4.7MF B 2012 |
| C15 | 1-100-503-11 | s | CAPACITOR,CERAMIC 4.7MF B 2012 |
| C16 | 1-100-503-11 | s | CAPACITOR,CERAMIC 4.7MF B 2012 |
| C17 | 1-127-692-91 | s | CAP, CHIP CERAMIC 10MF B 3216 |
| C19 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C21 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C22 | 1-135-960-91 | s | CAP, CHIP CERAMIC 10MF B(3225) |
| C23 | 1-135-960-91 | s | CAP, CHIP CERAMIC 10MF B(3225) |
| C24 | 1-135-960-91 | s | CAP, CHIP CERAMIC 10MF B(3225) |
| C25 | 1-165-629-11 | s | CAPACITOR,CERAMIC 1MF B |
| C26 | 1-165-629-11 | s | CAPACITOR,CERAMIC 1MF B |
| C27 | 1-165-629-11 | s | CAPACITOR,CERAMIC 1MF B |
| C28 | 1-165-629-11 | s | CAPACITOR,CERAMIC 1MF B |
| C29 *1 | 1-100-352-91 | s | CAP, CHIP CERAMIC 1MF B (1608) |
| *2 | 1-112-298-91 | o | CAP, CERAMIC 1MF B (1608) |
| C30 | 1-165-947-91 | s | CAP, CHIP CERAMIC 2.2MF (3225) |
| C31 | 1-165-947-91 | s | CAP, CHIP CERAMIC 2.2MF (3225) |
| CN2 | 1-770-622-21 | s | PIN, CONNECTOR 5P |
| D1 | 8-719-210-43 | s | DIODE EC10QS06 |
| D2 | 8-719-421-27 | s | DIODE MA728 |
| D3 | 8-719-421-27 | s | DIODE MA728 |
| D4 | 8-719-421-27 | s | DIODE MA728 |
| D5 | 8-719-059-51 | s | DIODE MA3J142E0LSO |
| D6 | 8-719-059-51 | s | DIODE MA3J142E0LSO |
| IC1 | 8-759-346-27 | s | IC LM45BIM3X |
| IC2 | 8-759-243-47 | s | IC TC74ACT04F |
| LV1 | 1-411-834-21 | s | COIL, VARIABLE |
| Q1 | 8-729-421-71 | s | TRANSISTOR 2SK620 |
| Q2 | 6-550-361-01 | s | TRANSISTOR 2SK2539-6/7/8-TB-E |
| Q3 | 6-550-361-01 | s | TRANSISTOR 2SK2539-6/7/8-TB-E |
| R1 | 1-208-647-11 | s | RESISTOR CHIP 33 1/16W (1005) |
| R2 | 1-218-939-11 | s | RESISTOR, CHIP 68 1/16W (1005) |
| R3 | 1-220-880-11 | s | RESISTOR,CHIP 27 (1005) |
| R4 | 1-220-880-11 | s | RESISTOR,CHIP 27 (1005) |
| R5 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R6 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R7 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R8 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R9 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R10 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |

(BI-187 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R11 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R12 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R13 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R14 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R15 | 1-208-905-11 | s | RESISTOR, CHIP 5.6K (1005) |
| R16 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R17 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R18 | 1-208-905-11 | s | RESISTOR, CHIP 5.6K (1005) |
| R19 | 1-208-695-11 | s | RESISTOR CHIP 3.3K 1/16W(1005) |
| R20 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R21 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R22 | 1-218-989-11 | s | RESISTOR,CHIP 1M 1/16W (1005) |
| R23 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R24 | 1-218-989-11 | s | RESISTOR,CHIP 1M 1/16W (1005) |
| R25 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R26 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R27 *1 | 1-208-675-11 | s | RESISTOR CHIP 470 1/16W (1005) |
| *2 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R28 *1 | 1-208-675-11 | s | RESISTOR CHIP 470 1/16W (1005) |
| *2 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R29 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R30 | 1-208-905-11 | s | RESISTOR, CHIP 5.6K (1005) |
| R31 | 1-208-695-11 | s | RESISTOR CHIP 3.3K 1/16W(1005) |
| R32 | 1-208-699-11 | s | RESISTOR,CHIP 4.7K 1/16W(1005) |
| R33 | 1-208-695-11 | s | RESISTOR CHIP 3.3K 1/16W(1005) |
| R34 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R35 | 1-208-699-11 | s | RESISTOR,CHIP 4.7K 1/16W(1005) |
| R36 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R37 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R38 | 1-208-699-11 | s | RESISTOR,CHIP 4.7K 1/16W(1005) |
| R39 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R40 *2 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R41 *2 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |

---

BI-188 BOARD

---

*1: [Board No. suffix 11]
*2: [Board No. suffix 12-]

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| 1pc | A-1099-208-A | s | MOUNTED CIRCUIT BOARD, BI-188 |
| C1 | 1-135-342-11 | s | CAPACITOR,SOLID ELECT 56MF |
| C2 *1 | 1-100-352-91 | s | CAP, CHIP CERAMIC 1MF B (1608) |
| *2 | 1-112-298-91 | o | CAP,CERAMIC 1MF B (1608) |
| C3 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C4 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C5 | 1-164-874-11 | s | CAPACITOR,CHIP CERAMIC 100PF |
| C6 | 1-100-503-11 | s | CAPACITOR,CERAMIC 4.7MF B 2012 |
| C7 | 1-164-862-11 | s | CAPACITOR,CHIP CERAMIC 33PF/50 |
| C8 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C9 | 1-164-156-11 | s | CAPACITOR,CERAMIC 0.1MF/25V F |
| C10 | 1-164-156-11 | s | CAPACITOR,CERAMIC 0.1MF/25V F |
| C11 | 1-164-156-11 | s | CAPACITOR,CERAMIC 0.1MF/25V F |
| C13 | 1-100-503-11 | s | CAPACITOR,CERAMIC 4.7MF B 2012 |
| C14 | 1-100-503-11 | s | CAPACITOR,CERAMIC 4.7MF B 2012 |
| C15 | 1-100-503-11 | s | CAPACITOR,CERAMIC 4.7MF B 2012 |
| C16 | 1-100-503-11 | s | CAPACITOR,CERAMIC 4.7MF B 2012 |
| C17 | 1-127-692-91 | s | CAP, CHIP CERAMIC 10MF B 3216 |
| C19 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C21 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C22 | 1-135-960-91 | s | CAP, CHIP CERAMIC 10MF B(3225) |
| C23 | 1-135-960-91 | s | CAP, CHIP CERAMIC 10MF B(3225) |
| C24 | 1-135-960-91 | s | CAP, CHIP CERAMIC 10MF B(3225) |
| C25 | 1-165-629-11 | s | CAPACITOR,CERAMIC 1MF B |
| C26 | 1-165-629-11 | s | CAPACITOR,CERAMIC 1MF B |
| C27 | 1-165-629-11 | s | CAPACITOR,CERAMIC 1MF B |
| C28 | 1-165-629-11 | s | CAPACITOR,CERAMIC 1MF B |
| C29 *1 | 1-100-352-91 | s | CAP, CHIP CERAMIC 1MF B (1608) |
| *2 | 1-112-298-91 | o | CAP,CERAMIC 1MF B (1608) |
| C30 | 1-165-947-91 | s | CAP, CHIP CERAMIC 2.2MF (3225) |
| C31 | 1-165-947-91 | s | CAP, CHIP CERAMIC 2.2MF (3225) |
| CN2 | 1-770-622-21 | s | PIN, CONNECTOR 5P |
| D1 | 8-719-210-43 | s | DIODE EC10QS06 |
| D2 | 8-719-421-27 | s | DIODE MA728 |
| D3 | 8-719-421-27 | s | DIODE MA728 |
| D4 | 8-719-421-27 | s | DIODE MA728 |
| D5 | 8-719-059-51 | s | DIODE MA3J142E0LSO |
| D6 | 8-719-059-51 | s | DIODE MA3J142E0LSO |
| IC1 | 8-759-346-27 | s | IC LM45BIM3X |
| IC2 | 8-759-243-47 | s | IC TC74ACT04F |
| LV1 | 1-411-834-21 | s | COIL, VARIABLE |
| Q1 | 8-729-421-71 | s | TRANSISTOR 2SK620 |
| Q2 | 6-550-361-01 | s | TRANSISTOR 2SK2539-6/7/8-TB-E |
| Q3 | 6-550-361-01 | s | TRANSISTOR 2SK2539-6/7/8-TB-E |
| R1 | 1-208-647-11 | s | RESISTOR CHIP 33 1/16W (1005) |
| R2 | 1-218-939-11 | s | RESISTOR, CHIP 68 1/16W (1005) |
| R3 | 1-220-880-11 | s | RESISTOR,CHIP 27 (1005) |
| R4 | 1-220-880-11 | s | RESISTOR,CHIP 27 (1005) |
| R5 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R6 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R7 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R8 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R9 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R10 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |

(BI-188 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R11 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R12 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R13 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R14 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R15 | 1-208-905-11 | s | RESISTOR, CHIP 5.6K (1005) |
| R16 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R17 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R18 | 1-208-905-11 | s | RESISTOR, CHIP 5.6K (1005) |
| R19 | 1-208-695-11 | s | RESISTOR CHIP 3.3K 1/16W(1005) |
| R20 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R21 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R22 | 1-218-989-11 | s | RESISTOR,CHIP 1M 1/16W (1005) |
| R23 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R24 | 1-218-989-11 | s | RESISTOR,CHIP 1M 1/16W (1005) |
| R25 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R26 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R27 *1 | 1-208-675-11 | s | RESISTOR CHIP 470 1/16W (1005) |
| *2 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R28 *1 | 1-208-675-11 | s | RESISTOR CHIP 470 1/16W (1005) |
| *2 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R29 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R30 | 1-208-905-11 | s | RESISTOR, CHIP 5.6K (1005) |
| R31 | 1-208-695-11 | s | RESISTOR CHIP 3.3K 1/16W(1005) |
| R32 | 1-208-699-11 | s | RESISTOR,CHIP 4.7K 1/16W(1005) |
| R33 | 1-208-695-11 | s | RESISTOR CHIP 3.3K 1/16W(1005) |
| R34 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R35 | 1-208-699-11 | s | RESISTOR,CHIP 4.7K 1/16W(1005) |
| R36 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R37 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R38 | 1-208-699-11 | s | RESISTOR,CHIP 4.7K 1/16W(1005) |
| R39 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R40 *2 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R41 *2 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |

---

BI-189 BOARD

---

*1: [Board No. suffix 11]
*2: [Board No. suffix 12-]

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| 1pc | A-1099-209-A | s | MOUNTED CIRCUIT BOARD, BI-189 |
| C1 | 1-135-342-11 | s | CAPACITOR,SOLID ELECT 56MF |
| C2 *1 | 1-100-352-91 | s | CAP, CHIP CERAMIC 1MF B (1608) |
| *2 | 1-112-298-91 | o | CAP, CERAMIC 1MF B (1608) |
| C3 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C4 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C5 | 1-164-874-11 | s | CAPACITOR,CHIP CERAMIC 100PF |
| C6 | 1-100-503-11 | s | CAPACITOR,CERAMIC 4.7MF B 2012 |
| C7 | 1-164-862-11 | s | CAPACITOR,CHIP CERAMIC 33PF/50 |
| C8 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C9 | 1-164-156-11 | s | CAPACITOR,CERAMIC 0.1MF/25V F |
| C10 | 1-164-156-11 | s | CAPACITOR,CERAMIC 0.1MF/25V F |
| C11 | 1-164-156-11 | s | CAPACITOR,CERAMIC 0.1MF/25V F |
| C13 | 1-100-503-11 | s | CAPACITOR,CERAMIC 4.7MF B 2012 |
| C14 | 1-100-503-11 | s | CAPACITOR,CERAMIC 4.7MF B 2012 |
| C15 | 1-100-503-11 | s | CAPACITOR,CERAMIC 4.7MF B 2012 |
| C16 | 1-100-503-11 | s | CAPACITOR,CERAMIC 4.7MF B 2012 |
| C17 | 1-127-692-91 | s | CAP, CHIP CERAMIC 10MF B 3216 |
| C19 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C21 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C22 | 1-135-960-91 | s | CAP, CHIP CERAMIC 10MF B(3225) |
| C23 | 1-135-960-91 | s | CAP, CHIP CERAMIC 10MF B(3225) |
| C24 | 1-135-960-91 | s | CAP, CHIP CERAMIC 10MF B(3225) |
| C25 | 1-165-629-11 | s | CAPACITOR,CERAMIC 1MF B |
| C26 | 1-165-629-11 | s | CAPACITOR,CERAMIC 1MF B |
| C27 | 1-165-629-11 | s | CAPACITOR,CERAMIC 1MF B |
| C28 | 1-165-629-11 | s | CAPACITOR,CERAMIC 1MF B |
| C29 *1 | 1-100-352-91 | s | CAP, CHIP CERAMIC 1MF B (1608) |
| *2 | 1-112-298-91 | o | CAP, CERAMIC 1MF B (1608) |
| C30 | 1-165-947-91 | s | CAP, CHIP CERAMIC 2.2MF (3225) |
| C31 | 1-165-947-91 | s | CAP, CHIP CERAMIC 2.2MF (3225) |
| CN2 | 1-770-622-21 | s | PIN, CONNECTOR 5P |
| D1 | 8-719-210-43 | s | DIODE EC10QS06 |
| D2 | 8-719-421-27 | s | DIODE MA728 |
| D3 | 8-719-421-27 | s | DIODE MA728 |
| D4 | 8-719-421-27 | s | DIODE MA728 |
| D5 | 8-719-059-51 | s | DIODE MA3J142E0LSO |
| D6 | 8-719-059-51 | s | DIODE MA3J142E0LSO |
| IC1 | 8-759-346-27 | s | IC LM45BIM3X |
| IC2 | 8-759-243-47 | s | IC TC74ACT04F |
| LV1 | 1-411-834-21 | s | COIL, VARIABLE |
| Q1 | 8-729-421-71 | s | TRANSISTOR 2SK620 |
| Q2 | 6-550-361-01 | s | TRANSISTOR 2SK2539-6/7/8-TB-E |
| Q3 | 6-550-361-01 | s | TRANSISTOR 2SK2539-6/7/8-TB-E |
| R1 | 1-208-647-11 | s | RESISTOR CHIP 33 1/16W (1005) |
| R2 | 1-218-939-11 | s | RESISTOR, CHIP 68 1/16W (1005) |
| R3 | 1-220-880-11 | s | RESISTOR,CHIP 27 (1005) |
| R4 | 1-220-880-11 | s | RESISTOR,CHIP 27 (1005) |
| R5 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R6 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R7 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R8 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R9 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R10 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |

(BI-189 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R11 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R12 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R13 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R14 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R15 | 1-208-905-11 | s | RESISTOR, CHIP 5.6K (1005) |
| R16 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R17 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R18 | 1-208-905-11 | s | RESISTOR, CHIP 5.6K (1005) |
| R19 | 1-208-695-11 | s | RESISTOR CHIP 3.3K 1/16W(1005) |
| R20 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R21 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R22 | 1-218-989-11 | s | RESISTOR,CHIP 1M 1/16W (1005) |
| R23 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R24 | 1-218-989-11 | s | RESISTOR,CHIP 1M 1/16W (1005) |
| R25 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R26 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R27 *1 | 1-208-675-11 | s | RESISTOR CHIP 470 1/16W (1005) |
| *2 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R28 *1 | 1-208-675-11 | s | RESISTOR CHIP 470 1/16W (1005) |
| *2 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R29 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R30 | 1-208-905-11 | s | RESISTOR, CHIP 5.6K (1005) |
| R31 | 1-208-695-11 | s | RESISTOR CHIP 3.3K 1/16W(1005) |
| R32 | 1-208-699-11 | s | RESISTOR,CHIP 4.7K 1/16W(1005) |
| R33 | 1-208-695-11 | s | RESISTOR CHIP 3.3K 1/16W(1005) |
| R34 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R35 | 1-208-699-11 | s | RESISTOR,CHIP 4.7K 1/16W(1005) |
| R36 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R37 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R38 | 1-208-699-11 | s | RESISTOR,CHIP 4.7K 1/16W(1005) |
| R39 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R40 *2 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R41 *2 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |

---

CN-2578 BOARD

---

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| 1pc | A-1099-261-A | s | MOUNTED CIRCUIT BOARD, CN-2578 |
| C1 | 1-135-342-11 | s | CAPACITOR,SOLID ELECT 56MF |
| C2 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C3 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C4 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C5 | 1-125-889-11 | s | CAPACITOR, CERAMIC 2.2MF |
| C6 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C7 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C8 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C9 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C10 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C11 | 1-135-343-11 | s | CAPACITOR,SOLID ELECT 120MF |
| C12 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C13 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C15 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C16 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C17 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C18 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C19 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C20 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C21 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C22 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C23 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C24 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| CN2 | 1-766-384-61 | s | CONNECTOR, FPC 28P |
| CN3 | 1-766-384-61 | s | CONNECTOR, FPC 28P |
| CN4 | 1-766-384-61 | s | CONNECTOR, FPC 28P |
| IC1 | 8-759-592-42 | s | IC TC7SZ00FU(TE85R) |
| IC2 | 6-704-976-01 | s | IC ADR381ART-REEL7 |
| IC3 | 8-759-592-42 | s | IC TC7SZ00FU(TE85R) |
| IC4 | 8-759-592-42 | s | IC TC7SZ00FU(TE85R) |
| IC5 | 8-759-327-01 | s | IC NJM062V-TE2 |
| IC6 | 8-759-592-42 | s | IC TC7SZ00FU(TE85R) |
| IC7 | 8-759-592-42 | s | IC TC7SZ00FU(TE85R) |
| IC8 | 8-759-592-42 | s | IC TC7SZ00FU(TE85R) |
| IC9 | 8-759-592-42 | s | IC TC7SZ00FU(TE85R) |
| IC10 | 8-759-592-42 | s | IC TC7SZ00FU(TE85R) |
| IC11 | 8-759-592-42 | s | IC TC7SZ00FU(TE85R) |
| IC12 | 8-759-592-42 | s | IC TC7SZ00FU(TE85R) |
| IC13 | 8-759-592-42 | s | IC TC7SZ00FU(TE85R) |
| IC14 | 8-759-592-42 | s | IC TC7SZ00FU(TE85R) |
| L1 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |
| Q1 | 8-729-143-13 | s | TRANSISTOR 2SC4176-B34 |
| Q2 | 8-729-230-27 | s | TRANSISTOR 2SA1213Y-TE12L |
| R1 | 1-220-874-11 | s | RES, CHIP 15 (1005) |
| R2 | 1-220-874-11 | s | RES, CHIP 15 (1005) |
| R3 | 1-220-874-11 | s | RES, CHIP 15 (1005) |
| R4 | 1-220-874-11 | s | RES, CHIP 15 (1005) |
| R5 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R6 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R7 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R8 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R9 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R10 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R11 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R12 | 1-208-703-11 | s | RESISTOR,CHIP 6.8K 1/16W(1005) |

(CN-2578 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R13 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R14 | 1-220-874-11 | s | RES, CHIP 15 (1005) |
| R15 | 1-220-874-11 | s | RES, CHIP 15 (1005) |
| R16 | 1-220-874-11 | s | RES, CHIP 15 (1005) |
| R17 | 1-220-874-11 | s | RES, CHIP 15 (1005) |
| R18 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R19 | 1-208-663-11 | s | RESISTOR CHIP 150 1/16W (1005) |
| R20 | 1-218-939-11 | s | RESISTOR, CHIP 68 1/16W (1005) |
| R21 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R22 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R23 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R24 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R25 | 1-220-874-11 | s | RES, CHIP 15 (1005) |
| R26 | 1-220-874-11 | s | RES, CHIP 15 (1005) |
| R27 | 1-220-874-11 | s | RES, CHIP 15 (1005) |
| R28 | 1-220-874-11 | s | RES, CHIP 15 (1005) |
| R29 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R30 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R31 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R32 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |

---
CN-2579 BOARD
---

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| 1pc | A-1159-983-A | s | MOUNTED CIRCUIT BOARD,CN-2579G (GOLD) |
| | A-1099-262-A | s | MOUNTED CIRCUIT BOARD, CN-2579 (SILVER) |
| CN1 | 1-779-522-31 | s | CONNECTOR, FFC/FPC(ZIF) AN 40P (GOLD) |
| CN2 | 1-764-441-51 | s | CONNECTOR, FPC 30P (GOLD) |
| | 1-764-441-21 | s | CONNECTOR, FPC (30P) (SILVER) |

---
CN-2602 BOARD
---

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| CN1 | 1-564-002-11 | s | PIN, CONNECTOR 3P |
| CN2 | 1-691-550-11 | s | PIN,CONNECTOR (3P)(SMD)(1.5MM) |
| CN3 | 1-564-002-11 | s | PIN, CONNECTOR 3P |
| R1 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |

---
CN-2603/2603B BOARD
---

*A: [HDC1000(UCJ,J)/HDC1100(J)]
*B: [HDC1000(CE)]

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| 1pc *A | A-1124-075-A | s | MOUNTED CIRCUIT BOARD, CN-2603 |
| 1pc *B | A-1177-500-A | s | MOUNTED CIRCUIT BOARD, CN-2603B |
| C1 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C2 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C3 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C4 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C5 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C6 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C7 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C8 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C9 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C10 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C11 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C12 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C13 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C14 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C15 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C16 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C17 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C18 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C19 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| CN1 | 1-580-544-11 | s | PIN, CONNECTOR (PC BOARD) 30P |
| CN2 | 1-566-765-11 | o | PIN,CONNECTOR 10P |
| CN3 | 1-566-765-11 | o | PIN,CONNECTOR 10P |
| JC1 *B | 1-218-990-81 | s | SHORT CHIP 0 |
| R1 | 1-216-864-11 | s | CONDUCTOR, CHIP (1608) |
| R2 | 1-216-864-11 | s | CONDUCTOR, CHIP (1608) |
| R3 | 1-216-864-11 | s | CONDUCTOR, CHIP (1608) |
| R4 | 1-216-864-11 | s | CONDUCTOR, CHIP (1608) |
| R5 | 1-216-864-11 | s | CONDUCTOR, CHIP (1608) |
| R6 | 1-216-864-11 | s | CONDUCTOR, CHIP (1608) |
| R7 *A | 1-216-864-11 | S | SHORT CHIP 0 |
| R8 *A | 1-216-864-11 | S | SHORT CHIP 0 |
| R9 *B | 1-216-864-11 | S | SHORT CHIP 0 |
| R10 *A | 1-216-864-11 | S | SHORT CHIP 0 |
| RV1 *A | 1-223-741-11 | s | RESISTOR, METAL CARBON VAR 50K |
| RV2 | 1-223-741-11 | s | RESISTOR, METAL CARBON VAR 50K |
| RV3 | 1-223-741-11 | s | RESISTOR, METAL CARBON VAR 50K |
| RV4 | 1-223-741-11 | s | RESISTOR, METAL CARBON VAR 50K |
| RV5 | 1-223-741-11 | s | RESISTOR, METAL CARBON VAR 50K |
| RV6 | 1-223-741-11 | s | RESISTOR, METAL CARBON VAR 50K |
| S1 *A | 1-762-124-11 | s | SWITCH, TOGGLE |
| S1 *B | 1-762-123-11 | s | SWITCH, TOGGLE |
| S2 *A | 1-762-124-11 | s | SWITCH, TOGGLE |
| S2 *B | 1-762-123-11 | s | SWITCH, TOGGLE |
| S3 *A | 1-762-122-11 | s | SWITCH, TOGGLE |
| S4 *A | 1-762-122-11 | s | SWITCH, TOGGLE |

---
CN-2604 BOARD
---

*1: [Board No. suffix 12-]

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| 1pc | A-1124-076-A | s | MOUNTED CIRCUIT BOARD, CN-2604 |
| C2 | 1-125-827-11 | s | CAPACITOR,CERAMIC 1MF/25V |
| C3 | 1-125-827-11 | s | CAPACITOR,CERAMIC 1MF/25V |
| C4 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C5 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C6 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C7 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C8 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C9 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C10 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C11 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C12 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C13 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C14 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C15 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C16 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C17 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C18 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C19 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C20 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C21 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C22 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C23 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C24 | 1-125-827-11 | s | CAPACITOR,CERAMIC 1MF/25V |
| C25 *1 | 1-125-777-11 | s | CERAMIC CHIP 0.1UF 10.00% 10V |
| CN1 | 1-778-552-11 | o | PIN, CONNECTOR 30P |
| FB1 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB2 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB3 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB4 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB5 | 1-234-518-21 | s | ARRAY, FERRITE CHIP |
| FB6 | 1-234-518-21 | s | ARRAY, FERRITE CHIP |
| FB7 | 1-234-518-21 | s | ARRAY, FERRITE CHIP |
| FB8 | 1-234-518-21 | s | ARRAY, FERRITE CHIP |
| FB9 | 1-414-772-11 | s | INDUCTOR,MICRO(CHIP TYPE) 2012 |
| FB10 | 1-414-772-11 | s | INDUCTOR,MICRO(CHIP TYPE) 2012 |
| FB11 | 1-469-108-11 | s | FERRITE, EMI (SMD) |
| FB12 | 1-469-108-11 | s | FERRITE, EMI (SMD) |
| FB13 | 1-469-108-11 | s | FERRITE, EMI (SMD) |
| FB14 | 1-414-772-11 | s | INDUCTOR,MICRO(CHIP TYPE) 2012 |
| FB15 | 1-414-772-11 | s | INDUCTOR,MICRO(CHIP TYPE) 2012 |
| THP1 ⚠ | 1-803-615-11 | s | THERMISTOR, POSITIVE |
| THP2 ⚠ | 1-803-615-11 | s | THERMISTOR, POSITIVE |
| THP3 ⚠ | 1-804-987-21 | s | THERMISTOR, POSITIVE |

---
CN-2605 BOARD
---

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C1 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C2 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| CN1 | 1-779-806-21 | s | CONNECTOR, 1.0MM PITCH 8P |
| D1 | 8-719-046-87 | s | DIODE F1J6 |

---
CN-2606 BOARD
---

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| 1pc | A-1124-078-A | s | MOUNTED CIRCUIT BOARD, CN-2606 |
| CN1 | 1-817-325-21 | s | PIN, CONNECTOR 20P |
| CN2 | 1-573-594-11 | s | CONNECTOR, XLR TYPE 3P |
| CN3 | 1-573-594-11 | s | CONNECTOR, XLR TYPE 3P |
| FB1 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB2 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB3 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB4 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB5 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB6 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FL1 | 1-239-897-12 | s | FILTER, EMI (SMD) |
| FL2 | 1-239-897-12 | s | FILTER, EMI (SMD) |
| FL3 | 1-239-897-12 | s | FILTER, EMI (SMD) |
| FL4 | 1-239-897-12 | s | FILTER, EMI (SMD) |
| FL5 | 1-239-897-12 | s | FILTER, EMI (SMD) |
| FL6 | 1-239-897-12 | s | FILTER, EMI (SMD) |
| R1 | 1-218-871-11 | s | RESISTOR,CHIP 10K 1/10W (1608) |
| R2 | 1-218-871-11 | s | RESISTOR,CHIP 10K 1/10W (1608) |
| R3 | 1-218-847-11 | s | RESISTOR, CHIP 1K 1/10W (1608) |
| R4 | 1-218-847-11 | s | RESISTOR, CHIP 1K 1/10W (1608) |
| R5 | 1-218-871-11 | s | RESISTOR,CHIP 10K 1/10W (1608) |
| R6 | 1-218-871-11 | s | RESISTOR,CHIP 10K 1/10W (1608) |
| R7 | 1-218-847-11 | s | RESISTOR, CHIP 1K 1/10W (1608) |
| R8 | 1-218-847-11 | s | RESISTOR, CHIP 1K 1/10W (1608) |
| R9 | 1-216-864-11 | s | CONDUCTOR, CHIP (1608) |
| R11 | 1-216-864-11 | s | CONDUCTOR, CHIP (1608) |
| R13 | 1-216-864-11 | s | CONDUCTOR, CHIP (1608) |
| R14 | 1-216-864-11 | s | CONDUCTOR, CHIP (1608) |
| R16 | 1-216-864-11 | s | CONDUCTOR, CHIP (1608) |
| R18 | 1-216-864-11 | s | CONDUCTOR, CHIP (1608) |
| S1 | 1-771-122-11 | s | SWITCH, SLIDE |
| S2 | 1-771-122-11 | s | SWITCH, SLIDE |
| S3 | 1-762-823-11 | s | SWITCH, SLIDE |
| S4 | 1-572-042-11 | s | SWITCH,SLIDE (2-4-3) |

---
CN-2607 BOARD
---

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| CN1 | 1-580-838-11 | o | PIN,CONNECTOR (PC BOARD) 4P |
| CN2 | 1-764-101-11 | s | PIN, CONNECTOR (PC BOARD) 2P |
| CN3 | 1-766-176-11 | o | PIN, CONNECTOR (PC BOARD) 6P |
| CN4 | 1-580-837-11 | o | PIN,CONNECTOR (PC BOARD) 3P |

---
CN-2608 BOARD
---

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| 3pcs | 2-176-841-01 | s | SCREW(M1.7) |
| C1 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| CN1 | 1-785-593-31 | s | CONNECTOR, MEMORY STICK |
| CN2 | 1-770-627-21 | s | PIN, CONNECTOR 10P |
| D1 | 6-500-122-01 | s | DIODE CL-375HR1YG-D-T |
| Q1 | 8-729-928-81 | s | TRANSISTOR DTC144EE |
| Q2 | 8-729-928-81 | s | TRANSISTOR DTC144EE |
| R1 | 1-208-671-11 | s | RESISTOR CHIP 330 1/16W (1005) |
| R2 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |

---
CN-2609 BOARD
---

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| 1pc | A-1166-186-A | s | MOUNTED CIRCUIT BOARD,CN-2609G (GOLD) |
| | A-1123-671-A | s | MOUNTED CIRCUIT BOARD, CN-2609 (SILVER) |
| C1 | 1-135-960-91 | s | CAP, CHIP CERAMIC 10MF B(3225) |
| C2 | 1-135-960-91 | s | CAP, CHIP CERAMIC 10MF B(3225) |
| C3 | 1-135-960-91 | s | CAP, CHIP CERAMIC 10MF B(3225) |
| C4 | 1-135-960-91 | s | CAP, CHIP CERAMIC 10MF B(3225) |
| C5 | 1-135-960-91 | s | CAP, CHIP CERAMIC 10MF B(3225) |
| CN2 | 1-764-087-21 | s | PIN, CONNECTOR (PC BOARD) 14P |
| CN3 | 1-778-650-11 | o | CONNECTOR, FFC (ZIF) 30P (SILVER) |
| CN4 | 1-816-587-11 | s | PIN, CONNECTOR (PC BOARD) 15P |
| L1 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L2 | 1-416-344-11 | s | COIL, CHOKE 10UH |
| L3 | 1-416-948-21 | s | COIL, CHOKE (SMD) |
| L4 | 1-416-344-11 | s | COIL, CHOKE 10UH |
| L5 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |
| L6 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |
| L7 | 1-416-344-11 | s | COIL, CHOKE 10UH |
| R1 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R2 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| THP1 | ⚠ 1-803-615-11 | s | THERMISTOR, POSITIVE |
| THP2 | ⚠ 1-803-615-11 | s | THERMISTOR, POSITIVE |
| THP3 | ⚠ 1-803-615-11 | s | THERMISTOR, POSITIVE |

```
------------------
CN-2614/2614B BOARD
------------------
*A: [HDC1500(J,SY)/1550(UC)/1600(J)]
*B: [HDC1400(CE)/1450(CE)/1500(CE)/1550(CE)/1580(CN)]

 Ref. No.
 or Q'ty  Part No.    SP Description

 1pc  *A  A-1099-114-A s MOUNTED CIRCUIT BOARD, CN-2614
      *B  A-1172-523-A s MOUNTED CIRCUIT BOARD, CN-2614B
 1pc  *B  3-186-958-01 o NUT (VF), PLATE

 C1       1-115-339-91 s CAP, CERAMIC 0.1MF B (2012)
 C2       1-115-339-91 s CAP, CERAMIC 0.1MF B (2012)
 C3       1-164-937-81 s CAP, CHIPCERAMIC 1000PF B 1005
 C4       1-164-937-81 s CAP, CHIPCERAMIC 1000PF B 1005
 C5       1-164-937-81 s CAP, CHIPCERAMIC 1000PF B 1005

 C6       1-164-937-81 s CAP, CHIPCERAMIC 1000PF B 1005
 C7       1-164-937-81 s CAP, CHIPCERAMIC 1000PF B 1005
 C8       1-164-937-81 s CAP, CHIPCERAMIC 1000PF B 1005
 C9       1-164-937-81 s CAP, CHIPCERAMIC 1000PF B 1005
 C10      1-115-339-91 s CAP, CERAMIC 0.1MF B (2012)

 C14      1-115-339-91 s CAP, CERAMIC 0.1MF B (2012)
 C16      1-164-937-81 s CAP, CHIPCERAMIC 1000PF B 1005
 C17      1-164-937-81 s CAP, CHIPCERAMIC 1000PF B 1005
 C18      1-164-937-81 s CAP, CHIPCERAMIC 1000PF B 1005
 C19      1-164-937-81 s CAP, CHIPCERAMIC 1000PF B 1005

 C20      1-164-937-81 s CAP, CHIPCERAMIC 1000PF B 1005
 C21      1-164-937-81 s CAP, CHIPCERAMIC 1000PF B 1005
 C22      1-164-937-81 s CAP, CHIPCERAMIC 1000PF B 1005
 C23      1-164-937-81 s CAP, CHIPCERAMIC 1000PF B 1005
 C24      1-164-937-81 s CAP, CHIPCERAMIC 1000PF B 1005

 CN2      1-793-152-21 o CONNECTOR 11P
 CN3      1-817-325-21 s PIN, CONNECTOR 20P

 D2       8-719-043-70 s DIODE MA6S121-(TX)

 FB1      1-234-518-21 s ARRAY, FERRITE CHIP
 FB2      1-234-518-21 s ARRAY, FERRITE CHIP
 FB3      1-469-108-21 s FERRITE, EMI (SMD) (1608)
 FB4      1-469-108-21 s FERRITE, EMI (SMD) (1608)
 FB5      1-469-108-21 s FERRITE, EMI (SMD) (1608)

 FB6      1-414-772-21 s FERRITE. EMI (SMD) (2012)
 FB7      1-234-518-21 s ARRAY, FERRITE CHIP
 FB8      1-469-094-21 s FERRITE, EMI (SMD) (1608)

 L1       1-416-344-21 s COIL, CHOKE 10UH

 R3       1-208-887-81 s RES, CHIP 1.0K (1005)
 R4       1-208-887-81 s RES, CHIP 1.0K (1005)

------------------------
CN-2615 BOARD (SUFFIX 12)
------------------------
 Ref. No.
 or Q'ty  Part No.    SP Description

 C1       1-162-964-11 s CAPACITOR,CERAMIC 1000PF/50V B
 C2       1-162-964-11 s CAPACITOR,CERAMIC 1000PF/50V B
 C3       1-162-964-11 s CAPACITOR,CERAMIC 1000PF/50V B
 C4       1-162-964-11 s CAPACITOR,CERAMIC 1000PF/50V B
 C5       1-162-964-11 s CAPACITOR,CERAMIC 1000PF/50V B

 CN1      1-573-594-11 s CONNECTOR, XLR TYPE 3P
 CN3      1-817-318-21 s PIN, CONNECTOR 6P

 FB1      1-469-094-21 s FERRITE, EMI (SMD)
 FB2      1-469-094-21 s FERRITE, EMI (SMD)
 FB3      1-469-094-21 s FERRITE, EMI (SMD)
 FB4      1-469-094-21 s FERRITE, EMI (SMD)
 FB5      1-469-094-21 s FERRITE, EMI (SMD)

 R1       1-216-864-11 s CONDUCTOR, CHIP (1608)

------------------------
CN-2615 BOARD (SUFFIX 13-)
------------------------
 Ref. No.
 or Q'ty  Part No.    SP Description

 C1       1-162-966-91 s CAP, CERAMIC 2200PF B 1608
 C2       1-164-315-91 s CAP, CERAMIC 470PF CH (1608)
 C3       1-164-315-91 s CAP, CERAMIC 470PF CH (1608)
 C4       1-162-966-91 s CAP, CERAMIC 2200PF B 1608
 C5       1-164-315-91 s CAP, CERAMIC 470PF CH (1608)

 C6       1-164-315-91 s CAP, CERAMIC 470PF CH (1608)

 CN1      1-573-594-11 s CONNECTOR, XLR TYPE 3P
 CN3      1-817-318-21 s PIN, CONNECTOR 6P

 FB1      1-414-445-21 s FERRITE, EMI (SMD) (1608)
 FB2      1-414-445-21 s FERRITE, EMI (SMD) (1608)
 FB3      1-414-445-21 s FERRITE, EMI (SMD) (1608)
 FB4      1-414-445-21 s FERRITE, EMI (SMD) (1608)

 JC1      1-216-864-91 s CONDUCTOR, CHIP (1608)
 JC2      1-216-864-91 s CONDUCTOR, CHIP (1608)

-------------
CN-2616 BOARD
-------------
 Ref. No.
 or Q'ty  Part No.    SP Description

 1pc      3-872-352-01 s BRACKET,LENS

 C1       1-100-567-81 s CAP,CHIP CERAMIC 0.01MF B 1005
 C2       1-100-567-81 s CAP,CHIP CERAMIC 0.01MF B 1005
 C3       1-100-567-81 s CAP,CHIP CERAMIC 0.01MF B 1005
 C4       1-100-567-81 s CAP,CHIP CERAMIC 0.01MF B 1005
 C5       1-100-567-81 s CAP,CHIP CERAMIC 0.01MF B 1005

 C6       1-100-567-81 s CAP,CHIP CERAMIC 0.01MF B 1005
 C7       1-100-567-81 s CAP,CHIP CERAMIC 0.01MF B 1005
 C8       1-100-567-81 s CAP,CHIP CERAMIC 0.01MF B 1005
 C9       1-100-567-81 s CAP,CHIP CERAMIC 0.01MF B 1005
 C10      1-100-567-81 s CAP,CHIP CERAMIC 0.01MF B 1005

 C12      1-115-339-11 s CAPACITOR,CERAMIC 0.1MF/50V
 C13      1-115-339-11 s CAPACITOR,CERAMIC 0.1MF/50V

 CN1      1-562-221-31 s CONNECTOR (ROUND TYPE)(R-F)12P
 CN2      1-819-308-21 s PIN, CONNECTOR 15P

 FB1      1-414-772-11 s INDUCTOR,MICRO(CHIP TYPE) 2012
 FB2      1-414-772-11 s INDUCTOR,MICRO(CHIP TYPE) 2012
 FB3      1-234-518-21 s ARRAY, FERRITE CHIP
 FB4      1-234-518-21 s ARRAY, FERRITE CHIP
 FB5      1-469-094-21 s FERRITE, EMI (SMD)

 FB6      1-469-094-21 s FERRITE, EMI (SMD)
```

## CN-2617 BOARD

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| 1pc | A-1099-117-A | s | MOUNTED CIRCUIT BOARD, CN-2617 |
| C1 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C2 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C4 | 1-115-339-11 | s | CAPACITOR,CERAMIC 0.1MF/50V |
| C5 | 1-164-874-11 | s | CAPACITOR,CHIP CERAMIC 100PF |
| C6 | 1-164-874-11 | s | CAPACITOR,CHIP CERAMIC 100PF |
| CN2 | 1-779-772-11 | s | CONENCTOR 13P |
| CN3 | 1-770-621-21 | s | PIN, CONNECTOR 4P |
| CN4 | 1-793-152-21 | o | CONNECTOR 11P |
| CN5 | 1-770-619-11 | s | PIN, CONNECTOR 2P |
| CN6 | 1-794-917-11 | s | CONNECTOR, MEMORY STICK |
| CN7 | 1-778-965-21 | s | PIN, CONNECTOR (PC BOARD) 12P |
| CN8 | 1-785-900-41 | s | CONNECTOR 5P |
| CN9 | 1-816-113-21 | s | CONNECTOR 15P |
| D1 | 8-719-801-78 | s | DIODE 1SS184 |
| D2 | 8-719-801-78 | s | DIODE 1SS184 |
| D3 | 6-500-122-01 | s | DIODE CL-375HR1YG-D-T |
| D4 | 8-719-801-78 | s | DIODE 1SS184 |
| D5 | 8-719-801-78 | s | DIODE 1SS184 |
| D6 | 8-719-820-41 | s | DIODE 1SS302 |
| D7 | 8-719-820-41 | s | DIODE 1SS302 |
| IC1 | 6-702-481-01 | s | IC PCA9555DB-118 |
| IC2 | 6-702-481-01 | s | IC PCA9555DB-118 |
| Q1 | 8-729-928-81 | s | TRANSISTOR DTC144EE |
| Q2 | 8-729-928-81 | s | TRANSISTOR DTC144EE |
| Q3 | 8-729-928-81 | s | TRANSISTOR DTC144EE |
| Q4 | 8-729-928-81 | s | TRANSISTOR DTC144EE |
| R1 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R2 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R3 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R4 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R5 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R6 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R7 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R8 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R9 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R10 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R11 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R12 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| RB1 | 1-234-380-11 | s | RESISTOR,NETWORK 47KX4 (1005) |
| RB2 | 1-234-380-11 | s | RESISTOR,NETWORK 47KX4 (1005) |
| RB3 | 1-234-380-11 | s | RESISTOR,NETWORK 47KX4 (1005) |
| RB4 | 1-234-380-11 | s | RESISTOR,NETWORK 47KX4 (1005) |
| RB5 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB6 | 1-234-375-21 | s | RES, NETWORK 1KX4 (1005) |
| RB7 | 1-234-375-21 | s | RES, NETWORK 1KX4 (1005) |
| RB8 | 1-234-375-21 | s | RES, NETWORK 1KX4 (1005) |
| RB9 | 1-234-375-21 | s | RES, NETWORK 1KX4 (1005) |
| RB10 | 1-234-375-21 | s | RES, NETWORK 1KX4 (1005) |
| RB11 | 1-234-375-21 | s | RES, NETWORK 1KX4 (1005) |
| RB12 | 1-234-375-21 | s | RES, NETWORK 1KX4 (1005) |
| RB13 | 1-234-380-11 | s | RESISTOR,NETWORK 47KX4 (1005) |
| RB14 | 1-234-380-11 | s | RESISTOR,NETWORK 47KX4 (1005) |

## CN-2618 BOARD (SUFFIX 12)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C2 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C3 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C4 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C5 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| CN1 | 1-784-254-11 | s | CONNECTOR 10P |
| CN3 | 1-784-602-11 | s | CONNECTOR, XLR (RECEPTACLE) 5P |
| FB1 | 1-414-445-11 | s | FERRITE, EMI (SMD) |
| FB2 | 1-414-445-11 | s | FERRITE, EMI (SMD) |
| FB3 | 1-414-445-11 | s | FERRITE, EMI (SMD) |
| FB4 | 1-414-445-11 | s | FERRITE, EMI (SMD) |
| FL1 | 1-239-897-12 | s | FILTER, EMI (SMD) |
| FL2 | 1-239-897-12 | s | FILTER, EMI (SMD) |
| FL3 | 1-239-897-12 | s | FILTER, EMI (SMD) |
| FL4 | 1-239-897-12 | s | FILTER, EMI (SMD) |

## CN-2618 BOARD (SUFFIX 13-)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C1 | 1-164-935-81 | s | CAP, CHIP CERAMIC 470PF B 1005 |
| C3 | 1-164-935-81 | s | CAP, CHIP CERAMIC 470PF B 1005 |
| C5 | 1-164-935-81 | s | CAP, CHIP CERAMIC 470PF B 1005 |
| C7 | 1-164-935-81 | s | CAP, CHIP CERAMIC 470PF B 1005 |
| C10 | 1-164-935-81 | s | CAP, CHIP CERAMIC 470PF B 1005 |
| C11 | 1-164-935-81 | s | CAP, CHIP CERAMIC 470PF B 1005 |
| CN1 | 1-784-254-21 | s | CONNECTOR 10P |
| CN3 | 1-784-602-11 | s | CONNECTOR, XLR (RECEPTACLE) 5P |
| FB3 | 1-469-112-21 | s | FERRITE, EMI (SMD) (1608) |
| FB6 | 1-469-112-21 | s | FERRITE, EMI (SMD) (1608) |
| FB7 | 1-414-445-21 | s | FERRITE, EMI (SMD) (1608) |
| FB8 | 1-414-445-21 | s | FERRITE, EMI (SMD) (1608) |
| FB9 | 1-414-445-21 | s | FERRITE, EMI (SMD) (1608) |
| FB10 | 1-414-445-21 | s | FERRITE, EMI (SMD) (1608) |
| L1 | 1-457-217-21 | o | COMMON MODE CHOKE COIL |
| R1 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R2 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |

---
CN-2619 BOARD
---

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| 1pc | A-1159-984-A | s | MOUNTED CIRCUIT BOARD,CN-2619G (GOLD) |
| | A-1099-119-A | s | MOUNTED CIRCUIT BOARD, CN-2619 (SILVER) |
| 2pcs | 3-729-076-11 | s | SCREW +B2X4 (STEEL) |
| C1 | 1-125-827-11 | s | CAPACITOR,CERAMIC 1MF/25V |
| C2 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C3 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C4 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C5 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C6 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C7 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C8 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C9 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C10 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C11 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C12 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C13 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C14 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C15 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C16 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C17 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C18 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C19 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C20 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C21 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C22 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C23 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C24 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C25 | 1-125-827-11 | s | CAPACITOR,CERAMIC 1MF/25V |
| C26 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C27 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C28 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C29 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C30 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| CN1 | 1-778-651-11 | o | CONNECTOR, FFC (ZIF) 40P (SILVER) |
| CN2 | 1-770-469-21 | o | PIN, CONNECTOR (PC BOARD) 2P |
| CN3 | 1-785-125-11 | o | CONNECTOR 6P |
| CN4 | 1-565-443-11 | o | RECEPTACLE,CONNECTOR 10P |
| CN5 | 1-819-262-11 | s | CONNECTOR, ROUND TYPE 12P |
| CN6 | 1-562-222-21 | s | RECEPTACLE,CONNECTOR 6P |
| CN7 | 1-785-900-41 | s | CONNECTOR 5P |
| CN8 | 1-563-929-11 | s | CONNECTOR,ROUND TYPE (RF) 4P |
| FB1 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB2 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB3 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB4 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB5 | 1-234-518-21 | s | ARRAY, FERRITE CHIP |
| FB6 | 1-234-518-21 | s | ARRAY, FERRITE CHIP |
| FB7 | 1-234-518-21 | s | ARRAY, FERRITE CHIP |
| FB8 | 1-234-518-21 | s | ARRAY, FERRITE CHIP |
| FB9 | 1-234-518-21 | s | ARRAY, FERRITE CHIP |
| FB10 | 1-414-772-11 | s | INDUCTOR,MICRO(CHIP TYPE) 2012 |
| FB11 | 1-414-772-11 | s | INDUCTOR,MICRO(CHIP TYPE) 2012 |
| FB12 | 1-469-108-11 | s | FERRITE, EMI (SMD) |
| FB13 | 1-469-108-11 | s | FERRITE, EMI (SMD) |
| FB14 | 1-469-108-11 | s | FERRITE, EMI (SMD) |

(CN-2619 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| FB15 | 1-469-108-11 | s | FERRITE, EMI (SMD) |
| FB16 | 1-469-108-11 | s | FERRITE, EMI (SMD) |
| FB17 | 1-414-772-11 | s | INDUCTOR,MICRO(CHIP TYPE) 2012 |
| FB18 | 1-414-772-11 | s | INDUCTOR,MICRO(CHIP TYPE) 2012 |
| S1 | 1-771-141-11 | s | SWITCH, SLIDE |
| THP1 | ⚠ 1-803-615-11 | s | THERMISTOR, POSITIVE |
| THP2 | ⚠ 1-803-615-11 | s | THERMISTOR, POSITIVE |

---
CN-2620 BOARD
---

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| CN1 | 1-580-724-11 | s | CONNECTOR, BNC |
| CN2 | 1-580-724-11 | s | CONNECTOR, BNC |
| CN3 | 1-817-317-21 | s | PIN, CONNECTOR 5P |
| FB1 | 1-469-108-11 | s | FERRITE, EMI (SMD) |
| FB2 | 1-469-108-11 | s | FERRITE, EMI (SMD) |

---

CN-2621 BOARD (HDC1500/1550/1600)

---

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| 1pc | A-1159-985-A | s | MOUNTED CIRCUIT BOARD,CN-2621G (GOLD) |
| | A-1099-121-A | s | MOUNTED CIRCUIT BOARD, CN-2621 (SILVER) |
| C1 | 1-125-827-11 | s | CAPACITOR,CERAMIC 1MF/25V |
| C2 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C3 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C4 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C5 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C6 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C7 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C15 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C16 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C17 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C18 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C19 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C20 | 1-164-874-11 | s | CAPACITOR,CHIP CERAMIC 100PF |
| C21 | 1-164-874-11 | s | CAPACITOR,CHIP CERAMIC 100PF |
| CN1 | 1-794-142-31 | s | CONNECTOR, FFC/FPC(ZIF) AN 36P (GOLD) |
| | 1-794-142-11 | o | CONNECTOR, FFC (ZIF) 36P (SILVER) |
| CN3 | 1-817-322-21 | s | PIN, CONNECTOR 12P |
| CN4 | 1-573-594-11 | s | CONNECTOR, XLR TYPE 3P |
| CN5 | 1-573-594-11 | s | CONNECTOR, XLR TYPE 3P |
| D1 | 8-719-801-78 | s | DIODE 1SS184 |
| D2 | 8-719-801-78 | s | DIODE 1SS184 |
| FB1 | 1-234-518-21 | s | ARRAY, FERRITE CHIP |
| FB2 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB3 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB4 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB5 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB6 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB7 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB8 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB9 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB10 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB11 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB12 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FL1 | 1-239-897-12 | s | FILTER, EMI (SMD) |
| FL2 | 1-239-897-12 | s | FILTER, EMI (SMD) |
| FL3 | 1-239-897-12 | s | FILTER, EMI (SMD) |
| FL4 | 1-239-897-12 | s | FILTER, EMI (SMD) |
| FL5 | 1-239-897-12 | s | FILTER, EMI (SMD) |
| FL6 | 1-239-897-12 | s | FILTER, EMI (SMD) |
| IC1 | 6-702-481-01 | s | IC PCA9555DB-118 |
| L1 | 1-416-344-11 | s | COIL, CHOKE 10UH |
| L2 | 1-416-344-11 | s | COIL, CHOKE 10UH |
| R1 | 1-211-985-11 | s | RESISTOR,CHIP 47 1/10W (1608) |
| R2 | 1-211-985-11 | s | RESISTOR,CHIP 47 1/10W (1608) |
| R3 | 1-218-847-11 | s | RESISTOR, CHIP 1K 1/10W (1608) |
| R4 | 1-218-871-11 | s | RESISTOR,CHIP 10K 1/10W (1608) |
| R5 | 1-218-871-11 | s | RESISTOR,CHIP 10K 1/10W (1608) |
| R6 | 1-218-847-11 | s | RESISTOR, CHIP 1K 1/10W (1608) |
| R7 | 1-218-847-11 | s | RESISTOR, CHIP 1K 1/10W (1608) |
| R8 | 1-218-871-11 | s | RESISTOR,CHIP 10K 1/10W (1608) |

(CN-2621 BOARD (HDC1500/1550/1600))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R9 | 1-218-871-11 | s | RESISTOR,CHIP 10K 1/10W (1608) |
| R10 | 1-218-847-11 | s | RESISTOR, CHIP 1K 1/10W (1608) |
| R11 | 1-216-864-11 | s | CONDUCTOR, CHIP (1608) |
| R13 | 1-216-864-11 | s | CONDUCTOR, CHIP (1608) |
| R15 | 1-216-864-11 | s | CONDUCTOR, CHIP (1608) |
| R16 | 1-216-864-11 | s | CONDUCTOR, CHIP (1608) |
| R18 | 1-216-864-11 | s | CONDUCTOR, CHIP (1608) |
| R20 | 1-216-864-11 | s | CONDUCTOR, CHIP (1608) |
| R27 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R28 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R29 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R30 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R31 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| RB1 | 1-234-380-11 | s | RESISTOR,NETWORK 47KX4 (1005) |
| RB2 | 1-234-380-11 | s | RESISTOR,NETWORK 47KX4 (1005) |
| RB3 | 1-234-380-11 | s | RESISTOR,NETWORK 47KX4 (1005) |
| RB4 | 1-234-380-11 | s | RESISTOR,NETWORK 47KX4 (1005) |
| RB5 | 1-234-375-21 | s | RES, NETWORK 1KX4 (1005) |
| RB6 | 1-234-375-21 | s | RES, NETWORK 1KX4 (1005) |
| RB7 | 1-234-375-21 | s | RES, NETWORK 1KX4 (1005) |
| RB8 | 1-234-375-21 | s | RES, NETWORK 1KX4 (1005) |
| S1 | 1-572-042-11 | s | SWITCH,SLIDE (2-4-3) |
| S2 | 1-572-042-11 | s | SWITCH,SLIDE (2-4-3) |
| S3 | 1-554-088-00 | s | SWITCH,KEY BOARD |

CN-2621GA BOARD (HDC1400/1450/1500/1550/1580/1600)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| 1pc | ⚠ A-1251-711-A | s | MOUNTED CIRCUIT BOARD, CN-2621GA |
| C1 | 1-165-629-91 | s | CAP, CERAMIC 1000000PF B(3225) |
| C2 | 1-112-692-81 | s | CAP,CHIP CERAMIC1000PF CH 1005 |
| C3 | 1-112-692-81 | s | CAP,CHIP CERAMIC1000PF CH 1005 |
| C4 | 1-112-692-81 | s | CAP,CHIP CERAMIC1000PF CH 1005 |
| C5 | 1-112-692-81 | s | CAP,CHIP CERAMIC1000PF CH 1005 |
| C6 | 1-112-692-81 | s | CAP,CHIP CERAMIC1000PF CH 1005 |
| C7 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C9 | 1-112-692-81 | s | CAP,CHIP CERAMIC1000PF CH 1005 |
| C12 | 1-112-692-81 | s | CAP,CHIP CERAMIC1000PF CH 1005 |
| C15 | 1-112-692-81 | s | CAP,CHIP CERAMIC1000PF CH 1005 |
| C16 | 1-112-692-81 | s | CAP,CHIP CERAMIC1000PF CH 1005 |
| C17 | 1-112-692-81 | s | CAP,CHIP CERAMIC1000PF CH 1005 |
| C18 | 1-112-692-81 | s | CAP,CHIP CERAMIC1000PF CH 1005 |
| C19 | 1-112-692-81 | s | CAP,CHIP CERAMIC1000PF CH 1005 |
| C20 | 1-164-874-81 | s | CAP,CHIP CERAMIC 100PF CH 1005 |
| C21 | 1-164-874-81 | s | CAP,CHIP CERAMIC 100PF CH 1005 |
| C22 | 1-165-629-91 | s | CAP, CERAMIC 1000000PF B(3225) |
| C23 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| CN1 | 1-794-142-31 | s | CONNECTOR, FFC/FPC(ZIF) AN 36P |
| CN3 | 1-817-322-21 | s | PIN, CONNECTOR 12P |
| CN4 | 1-573-594-11 | s | CONNECTOR, XLR TYPE 3P |
| CN5 | 1-573-594-11 | s | CONNECTOR, XLR TYPE 3P |
| CN8 | 1-817-318-21 | s | PIN, CONNECTOR 6P |
| D1 | 8-719-024-83 | s | DIODE 1SS301-TE85L |
| D2 | 8-719-024-83 | s | DIODE 1SS301-TE85L |
| FB1 | 1-234-518-21 | s | ARRAY, FERRITE CHIP |
| FB2 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB3 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FL1 | 1-239-897-22 | s | FILTER, EMI (SMD) |
| FL2 | 1-239-897-22 | s | FILTER, EMI (SMD) |
| FL3 | 1-239-897-22 | s | FILTER, EMI (SMD) |
| IC1 | 6-702-481-01 | s | IC PCA9555DB-118 |
| JC1 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| JC2 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| JC9 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| JC10 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| JC11 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| JC12 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| JC13 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| JC14 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| L1 | 1-416-344-21 | s | COIL, CHOKE 10UH |
| L2 | 1-416-344-21 | s | COIL, CHOKE 10UH |
| L3 | 1-457-217-21 | o | COMMON MODE CHOKE COIL |
| L4 | 1-457-217-21 | o | COMMON MODE CHOKE COIL |
| R1 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R2 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R3 | 1-218-851-91 | s | RES, CHIP 1.5K (1608) |
| R4 | 1-218-871-91 | s | RES, CHIP 10K (1608) |
| R5 | 1-218-871-91 | s | RES, CHIP 10K (1608) |
| R6 | 1-218-851-91 | s | RES, CHIP 1.5K (1608) |
| R7 | 1-218-851-91 | s | RES, CHIP 1.5K (1608) |
| R8 | 1-218-871-91 | s | RES, CHIP 10K (1608) |
| R9 | 1-218-871-91 | s | RES, CHIP 10K (1608) |
| R10 | 1-218-851-91 | s | RES, CHIP 1.5K (1608) |

(CN-2621GA BOARD (HDC1400/1450/1500/1550/1580/1600))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R11 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| R13 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| R15 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| R16 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| R18 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| R20 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| R27 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R28 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R29 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R30 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R31 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| RB1 | 1-234-380-21 | s | RES, NETWORK 47K (1005X4) |
| RB2 | 1-234-380-21 | s | RES, NETWORK 47K (1005X4) |
| RB3 | 1-234-380-21 | s | RES, NETWORK 47K (1005X4) |
| RB4 | 1-234-380-21 | s | RES, NETWORK 47K (1005X4) |
| RB5 | 1-234-375-21 | s | RES, NETWORK 1K (1005X4) |
| RB6 | 1-234-375-21 | s | RES, NETWORK 1K (1005X4) |
| RB7 | 1-234-375-21 | s | RES, NETWORK 1K (1005X4) |
| RB8 | 1-234-375-21 | s | RES, NETWORK 1K (1005X4) |
| S1 | 1-572-042-11 | s | SWITCH, SLIDE |
| S2 | 1-572-042-11 | s | SWITCH, SLIDE |
| S3 | 1-571-699-11 | s | SWITCH, KEY BOARD |

---
CN-2622 BOARD
---

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C1 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C2 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| CN1 | 1-817-322-21 | s | PIN, CONNECTOR 12P |
| CN2 | 1-766-696-11 | o | CONNECTOR, ROUND TYPE 8P |
| D1 | 8-719-046-87 | s | DIODE F1J6 |

---
CN-2623 BOARD
---

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C1 | 1-119-869-91 | s | CAPACITOR,CERAMIC CHIP 10MF |
| C2 | 1-119-869-91 | s | CAPACITOR,CERAMIC CHIP 10MF |
| CN1 | 1-509-177-41 | s | RECEPTACLE (4P),CONNECTOR |
| CN2 | 1-770-470-21 | o | PIN, CONNECTOR (PC BOARD) 6P |
| FB1 | 1-414-772-11 | s | INDUCTOR,MICRO(CHIP TYPE) 2012 |
| FB2 | 1-414-772-11 | s | INDUCTOR,MICRO(CHIP TYPE) 2012 |
| FB3 | 1-414-772-11 | s | INDUCTOR,MICRO(CHIP TYPE) 2012 |
| FB4 | 1-414-772-11 | s | INDUCTOR,MICRO(CHIP TYPE) 2012 |
| FB5 | 1-414-772-11 | s | INDUCTOR,MICRO(CHIP TYPE) 2012 |
| FB6 | 1-414-772-11 | s | INDUCTOR,MICRO(CHIP TYPE) 2012 |

---
CN-2640 BOARD
---

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C1 | 1-162-966-11 | s | CAPACITOR,CERAMIC 2200PF/50V B |
| C2 | 1-162-966-11 | s | CAPACITOR,CERAMIC 2200PF/50V B |
| CN1 | 1-770-623-21 | s | PIN, CONNECTOR 6P |
| CN2 | 1-507-980-21 | s | JACK (3.5MM) |
| FL1 | 1-239-895-11 | s | FILTER, EMI (SMD) |
| FL2 | 1-239-895-11 | s | FILTER, EMI (SMD) |
| L1 | 1-469-549-21 | s | INDUCTOR, CHIP 1.0UH (LB2016) |
| R1 | 1-211-973-11 | s | RESISTOR,CHIP 15 1/10W (1608) |
| R2 | 1-211-973-11 | s | RESISTOR,CHIP 15 1/10W (1608) |

---
CN-2671 BOARD
---

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C2 | 1-162-964-11 | s | CAPACITOR,CERAMIC 1000PF/50V B |
| C3 | 1-162-964-11 | s | CAPACITOR,CERAMIC 1000PF/50V B |
| C4 | 1-162-964-11 | s | CAPACITOR,CERAMIC 1000PF/50V B |
| C5 | 1-162-964-11 | s | CAPACITOR,CERAMIC 1000PF/50V B |
| CN1 | 1-695-223-21 | o | PIN,CONNECTOR (SMD) 10P |
| CN3 | 1-784-602-11 | s | CONNECTOR, XLR (RECEPTACLE) 5P |
| FB1 | 1-414-445-11 | s | FERRITE, EMI (SMD) |
| FB2 | 1-414-445-11 | s | FERRITE, EMI (SMD) |
| FB3 | 1-414-445-11 | s | FERRITE, EMI (SMD) |
| FB4 | 1-414-445-11 | s | FERRITE, EMI (SMD) |
| R3 | 1-216-864-11 | s | CONDUCTOR, CHIP (1608) |
| R4 | 1-216-864-11 | s | CONDUCTOR, CHIP (1608) |
| R5 | 1-216-864-11 | s | CONDUCTOR, CHIP (1608) |
| R6 | 1-216-864-11 | s | CONDUCTOR, CHIP (1608) |

---
CN-2712 BOARD
---

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| 1pc | A-1099-206-A | s | MOUNTED CIRCUIT BOARD, CN-2712 |
| C1 | 1-135-342-11 | s | CAPACITOR,SOLID ELECT 56MF |
| C2 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C3 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C4 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C5 | 1-125-889-11 | s | CAPACITOR, CERAMIC 2.2MF |
| C6 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C7 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C8 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C9 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C10 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C11 | 1-135-343-11 | s | CAPACITOR,SOLID ELECT 120MF |
| C12 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C13 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C15 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C16 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C17 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C18 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C19 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C20 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C21 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C22 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C23 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C24 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| CN2 | 1-764-441-61 | s | CONNECTOR, FPC 30P |
| CN3 | 1-764-441-61 | s | CONNECTOR, FPC 30P |
| CN4 | 1-764-441-61 | s | CONNECTOR, FPC 30P |
| IC1 | 8-759-592-42 | s | IC TC7SZ00FU(TE85R) |
| IC2 | 6-704-976-01 | s | IC ADR381ART-REEL7 |
| IC3 | 8-759-592-42 | s | IC TC7SZ00FU(TE85R) |
| IC4 | 8-759-592-42 | s | IC TC7SZ00FU(TE85R) |
| IC5 | 8-759-327-01 | s | IC NJM062V-TE2 |
| IC6 | 8-759-592-42 | s | IC TC7SZ00FU(TE85R) |
| IC7 | 8-759-592-42 | s | IC TC7SZ00FU(TE85R) |
| IC8 | 8-759-592-42 | s | IC TC7SZ00FU(TE85R) |
| IC9 | 8-759-592-42 | s | IC TC7SZ00FU(TE85R) |
| IC10 | 8-759-592-42 | s | IC TC7SZ00FU(TE85R) |
| IC11 | 8-759-592-42 | s | IC TC7SZ00FU(TE85R) |
| IC12 | 8-759-592-42 | s | IC TC7SZ00FU(TE85R) |
| IC13 | 8-759-592-42 | s | IC TC7SZ00FU(TE85R) |
| IC14 | 8-759-592-42 | s | IC TC7SZ00FU(TE85R) |
| L1 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |
| Q1 | 8-729-143-13 | s | TRANSISTOR 2SC4176-B34 |
| Q2 | 8-729-230-27 | s | TRANSISTOR 2SA1213Y-TE12L |
| R1 | 1-220-874-11 | s | RES, CHIP 15 (1005) |
| R2 | 1-220-874-11 | s | RES, CHIP 15 (1005) |
| R3 | 1-220-874-11 | s | RES, CHIP 15 (1005) |
| R4 | 1-220-874-11 | s | RES, CHIP 15 (1005) |
| R5 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R6 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R7 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R8 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R9 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R10 | 1-220-874-11 | s | RES, CHIP 15 (1005) |
| R11 | 1-220-874-11 | s | RES, CHIP 15 (1005) |
| R12 | 1-220-874-11 | s | RES, CHIP 15 (1005) |

(CN-2712 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R13 | 1-220-874-11 | s | RES, CHIP 15 (1005) |
| R14 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R15 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R16 | 1-208-703-11 | s | RESISTOR,CHIP 6.8K 1/16W(1005) |
| R17 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R18 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R19 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R20 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R21 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R22 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R23 | 1-208-663-11 | s | RESISTOR CHIP 150 1/16W (1005) |
| R24 | 1-218-939-11 | s | RESISTOR, CHIP 68 1/16W (1005) |
| R25 | 1-220-874-11 | s | RES, CHIP 15 (1005) |
| R26 | 1-220-874-11 | s | RES, CHIP 15 (1005) |
| R27 | 1-220-874-11 | s | RES, CHIP 15 (1005) |
| R28 | 1-220-874-11 | s | RES, CHIP 15 (1005) |
| R29 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R30 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R31 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R32 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |

---
CN-2723 BOARD
---

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| 1pc | A-1159-995-A | s | MOUNTED CIRCUIT BOARD, CN-2723G (GOLD) |
| | A-1099-210-A | s | MOUNTED CIRCUIT BOARD, CN-2723 (SILVER) |
| CN1 | 1-779-522-31 | s | CONNECTOR, FFC/FPC(ZIF) AN 40P (GOLD) |
| CN2 | 1-764-441-51 | s | CONNECTOR, FPC 30P (GOLD) |
| | 1-764-441-21 | s | CONNECTOR, FPC (30P) (SILVER) |

---
DAP-33 BOARD
---

*1: [Board No. suffix 12]
*2: [Board No. suffix 13-]

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| 1pc | A-1101-925-A | s | MOUNTED CIRCUIT BOARD, DAP-33 |
| 3pcs | 3-729-061-01 | s | SCREW (M2X4.5) (TYPE 1)(STEEL) |
| 2pcs | 4-654-273-02 | s | ACE (M2), LOCK |
| 1pc | 1-756-076-21 | s | HOLDER, LITHIUM BATTERY |
| BT1 | ⚠ 1-528-174-11 | s | BATTERY, LITHIUM (CR2032TYPE) |
| C1 | 1-100-352-91 | s | CAP, CHIP CERAMIC 1MF B (1608) |
| C2 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C5 | 1-100-352-91 | s | CAP, CHIP CERAMIC 1MF B (1608) |
| C7 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C8 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C10 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C11 | 1-165-884-91 | s | CAPACITOR, CERAMIC 2.2MF(1608) |
| C12 | 1-165-884-91 | s | CAPACITOR, CERAMIC 2.2MF(1608) |
| C13 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C21 | 1-127-692-91 | s | CAP, CHIP CERAMIC 10MF B 3216 |
| C22 | 1-100-352-91 | s | CAP, CHIP CERAMIC 1MF B (1608) |
| C23 | 1-100-352-91 | s | CAP, CHIP CERAMIC 1MF B (1608) |
| C24 | 1-127-692-91 | s | CAP, CHIP CERAMIC 10MF B 3216 |
| C25 | 1-127-692-91 | s | CAP, CHIP CERAMIC 10MF B 3216 |
| C29 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C30 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C31 | 1-164-874-11 | s | CAPACITOR,CHIP CERAMIC 100PF |
| C32 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C33 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C34 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C35 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C36 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C37 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C38 | 1-127-692-91 | s | CAP, CHIP CERAMIC 10MF B 3216 |
| C39 | 1-127-692-91 | s | CAP, CHIP CERAMIC 10MF B 3216 |
| C41 | 1-127-692-91 | s | CAP, CHIP CERAMIC 10MF B 3216 |
| C42 | 1-119-923-11 | s | CAPACITOR,CHIP CERAMIC 0.047MF |
| C43 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C44 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C45 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C46 | 1-119-923-11 | s | CAPACITOR,CHIP CERAMIC 0.047MF |
| C47 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C48 | 1-107-819-11 | s | CAP,CERAMIC 22000PF/16V(1005) |
| C49 | 1-164-936-11 | s | CAPACITOR,CHIP CERAMIC 680PF |
| C50 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C51 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C52 | 1-127-692-91 | s | CAP, CHIP CERAMIC 10MF B 3216 |
| C53 | 1-107-826-11 | s | CAPACITOR,CHIP CERAMIC 0.1MF |
| C54 | 1-107-826-11 | s | CAPACITOR,CHIP CERAMIC 0.1MF |
| C55 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C56 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C58 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C59 | 1-107-826-11 | s | CAPACITOR,CHIP CERAMIC 0.1MF |
| C60 | 1-107-826-11 | s | CAPACITOR,CHIP CERAMIC 0.1MF |
| C61 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C62 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C63 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C64 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C65 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C66 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C68 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |

(DAP-33 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C69 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C70 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C71 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C72 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C74 | 1-104-905-11 | s | CAPACITOR DOUBLE LAYERS 0.22F |
| C75 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C76 | 1-100-5_7-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C77 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C201 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C202 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C203 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C204 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C205 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C206 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C207 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C208 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C209 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C210 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C211 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C212 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C213 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C214 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C215 | 1-107-826-11 | s | CAPACITOR,CHIP CERAMIC 0.1MF |
| C216 | 1-107-826-11 | s | CAPACITOR,CHIP CERAMIC 0.1MF |
| C217 | 1-107-826-11 | s | CAPACITOR,CHIP CERAMIC 0.1MF |
| C220 | 1-164-858-11 | s | CAPACITOR,CERAMIC 22PF/50V |
| C222 | 1-100-352-91 | s | CAP, CHIP CERAMIC 1MF B (1608) |
| C223 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C224 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C225 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C226 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C227 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C228 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C230 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C231 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C232 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C234 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C235 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C236 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C237 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C238 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C239 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C241 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C242 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C243 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C245 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C246 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C247 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C248 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C249 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C250 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C251 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C252 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C253 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C258 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C271 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C272 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C273 | 1-165-884-91 | s | CAPACITOR, CERAMIC 2.2MF(1608) |
| C274 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |

(DAP-33 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C275 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C276 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C277 | 1-100-352-91 | s | CAP, CHIP CERAMIC 1MF B (1608) |
| C278 | 1-100-352-91 | s | CAP, CHIP CERAMIC 1MF B (1608) |
| C279 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C280 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C281 | 1-164-935-11 | s | CAPACITOR,CHIP CERAMIC 470PF |
| C282 | 1-164-935-11 | s | CAPACITOR,CHIP CERAMIC 470PF |
| C283 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C284 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C287 | 1-100-352-91 | s | CAP, CHIP CERAMIC 1MF B (1608) |
| C288 | 1-100-352-91 | s | CAP, CHIP CERAMIC 1MF B (1608) |
| C289 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C290 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C291 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C301 | 1-107-826-11 | s | CAPACITOR,CHIP CERAMIC 0.1MF |
| C302 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C303 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C304 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C305 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C306 | 1-165-884-91 | s | CAPACITOR, CERAMIC 2.2MF(1608) |
| C307 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C308 | 1-100-352-91 | s | CAP, CHIP CERAMIC 1MF B (1608) |
| C309 | 1-100-352-91 | s | CAP, CHIP CERAMIC 1MF B (1608) |
| C310 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C311 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C312 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C313 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C314 | 1-164-935-11 | s | CAPACITOR,CHIP CERAMIC 470PF |
| C315 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C316 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C317 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C318 | 1-164-935-11 | s | CAPACITOR,CHIP CERAMIC 470PF |
| C319 | 1-164-935-11 | s | CAPACITOR,CHIP CERAMIC 470PF |
| C321 | 1-100-352-91 | s | CAP, CHIP CERAMIC 1MF B (1608) |
| C351 | 1-107-826-11 | s | CAPACITOR,CHIP CERAMIC 0.1MF |
| C352 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C353 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C354 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C355 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C356 | 1-165-884-91 | s | CAPACITOR, CERAMIC 2.2MF(1608) |
| C357 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C358 | 1-100-352-91 | s | CAP, CHIP CERAMIC 1MF B (1608) |
| C359 | 1-100-352-91 | s | CAP, CHIP CERAMIC 1MF B (1608) |
| C360 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C361 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C362 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C363 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C364 | 1-164-935-11 | s | CAPACITOR,CHIP CERAMIC 470PF |
| C365 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C366 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C367 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C368 | 1-164-935-11 | s | CAPACITOR,CHIP CERAMIC 470PF |
| C369 | 1-164-935-11 | s | CAPACITOR,CHIP CERAMIC 470PF |
| C371 | 1-100-352-91 | s | CAP, CHIP CERAMIC 1MF B (1608) |
| C401 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C402 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C403 | 1-107-826-11 | s | CAPACITOR,CHIP CERAMIC 0.1MF |
| C404 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |

(DAP-33 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C405 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C406 | 1-165-884-91 | s | CAPACITOR, CERAMIC 2.2MF(1608) |
| C407 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C408 | 1-100-352-91 | s | CAP, CHIP CERAMIC 1MF B (1608) |
| C409 | 1-100-352-91 | s | CAP, CHIP CERAMIC 1MF B (1608) |
| C410 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C411 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C412 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C413 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C414 | 1-164-935-11 | s | CAPACITOR,CHIP CERAMIC 470PF |
| C415 | 1-164-935-11 | s | CAPACITOR,CHIP CERAMIC 470PF |
| C416 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C417 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C418 | 1-164-935-11 | s | CAPACITOR,CHIP CERAMIC 470PF |
| C419 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C420 | 1-100-415-11 | s | CAPACITOR,CERAMIC 0.47MF(1005) |
| C421 | 1-100-415-11 | s | CAPACITOR,CERAMIC 0.47MF(1005) |
| C422 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C423 | 1-100-415-11 | s | CAPACITOR,CERAMIC 0.47MF(1005) |
| C425 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C426 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C427 | 1-128-589-11 | s | CAPACITOR ELECT 47MF/6.3V(105C |
| C428 | 1-128-589-11 | s | CAPACITOR ELECT 47MF/6.3V(105C |
| C429 | 1-100-352-91 | s | CAP, CHIP CERAMIC 1MF B (1608) |
| C430 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C451 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C452 | 1-107-826-11 | s | CAPACITOR,CHIP CERAMIC 0.1MF |
| C453 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C454 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C455 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C456 | 1-165-884-91 | s | CAPACITOR, CERAMIC 2.2MF(1608) |
| C457 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C458 | 1-100-352-91 | s | CAP, CHIP CERAMIC 1MF B (1608) |
| C459 | 1-100-352-91 | s | CAP, CHIP CERAMIC 1MF B (1608) |
| C460 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C461 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C462 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C463 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C464 | 1-164-935-11 | s | CAPACITOR,CHIP CERAMIC 470PF |
| C465 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C466 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C467 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C469 | 1-164-935-11 | s | CAPACITOR,CHIP CERAMIC 470PF |
| C470 | 1-164-935-11 | s | CAPACITOR,CHIP CERAMIC 470PF |
| C471 | 1-107-826-11 | s | CAPACITOR,CHIP CERAMIC 0.1MF |
| C472 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C473 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C474 | 1-115-153-11 | s | CAPACITOR,ELECT 4.7MF/16V(BP) |
| C475 | 1-115-153-11 | s | CAPACITOR,ELECT 4.7MF/16V(BP) |
| C476 | 1-164-874-11 | s | CAPACITOR,CHIP CERAMIC 100PF |
| C477 | 1-164-874-11 | s | CAPACITOR,CHIP CERAMIC 100PF |
| CN2 | 1-764-093-21 | o | PIN, CONNECTOR (PC BOARD) 8P |
| D1 | 8-719-157-91 | s | DIODE RD3.0SB |
| D2 | 8-719-017-03 | s | DIODE 02DZ4.7-TPH3 |
| D3 | 8-719-017-03 | s | DIODE 02DZ4.7-TPH3 |
| D52 | 8-719-820-41 | s | DIODE 1SS302 |
| D53 | 8-719-421-27 | s | DIODE MA728 |

(DAP-33 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| D271 | 8-719-421-27 | s | DIODE MA728 |
| D272 | 8-719-421-27 | s | DIODE MA728 |
| D273 | 8-719-421-27 | s | DIODE MA728 |
| D274 | 8-719-421-27 | s | DIODE MA728 |
| D275 | 8-719-157-91 | s | DIODE RD3.0SB |
| D276 | 8-719-157-91 | s | DIODE RD3.0SB |
| D277 | 8-719-157-91 | s | DIODE RD3.0SB |
| D278 | 8-719-157-91 | s | DIODE RD3.0SB |
| D301 | 8-719-421-27 | s | DIODE MA728 |
| D302 | 8-719-421-27 | s | DIODE MA728 |
| D303 | 8-719-036-65 | s | DIODE RD2.0SB-T1 |
| D304 | 8-719-036-65 | s | DIODE RD2.0SB-T1 |
| D351 | 8-719-421-27 | s | DIODE MA728 |
| D352 | 8-719-421-27 | s | DIODE MA728 |
| D353 | 8-719-036-65 | s | DIODE RD2.0SB-T1 |
| D354 | 8-719-036-65 | s | DIODE RD2.0SB-T1 |
| D401 | 8-719-421-27 | s | DIODE MA728 |
| D402 | 8-719-421-27 | s | DIODE MA728 |
| D403 | 8-719-036-65 | s | DIODE RD2.0SB-T1 |
| D404 | 8-719-036-65 | s | DIODE RD2.0SB-T1 |
| D451 | 8-719-421-27 | s | DIODE MA728 |
| D452 | 8-719-421-27 | s | DIODE MA728 |
| D453 | 8-719-036-65 | s | DIODE RD2.0SB-T1 |
| D454 | 8-719-036-65 | s | DIODE RD2.0SB-T1 |
| D455 | 8-719-801-78 | s | DIODE 1SS184 |
| E1 | 1-535-877-22 | s | CHIP,CHECKER (TEST POINT) |
| E2 | 1-535-877-22 | s | CHIP,CHECKER (TEST POINT) |
| FB2 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB3 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| IC1 | 8-759-327-01 | s | IC NJM062V-TE2 |
| IC2 | 8-759-327-01 | s | IC NJM062V-TE2 |
| IC3 | 6-704-976-01 | s | IC ADR381ART-REEL7 |
| IC4 | 6-701-572-01 | s | IC TPS54610PWPR |
| IC11 | 8-759-363-26 | s | IC RN5VD28AA-TL |
| IC61 | 8-759-523-00 | s | IC TC74HC4051AFT(EL) |
| IC62 | 8-759-327-01 | s | IC NJM062V-TE2 |
| IC63 | 8-759-327-01 | s | IC NJM062V-TE2 |
| IC64 | 8-759-327-01 | s | IC NJM062V-TE2 |
| IC75 | 8-759-644-10 | s | IC MAX3491CSD+TG068 |
| IC81 | 8-759-648-04 | s | IC RTC4574JE-TP |
| IC82 | 8-759-648-61 | s | IC LTC1387CG |
| IC83 | 6-706-487-01 | s | IC TC7SH08FU(T5RSOYJF) |
| IC84 | 6-706-487-01 | s | IC TC7SH08FU(T5RSOYJF) |
| IC202 | 6-700-387-01 | s | IC EPC2LC20-TP |
| IC203 | 8-759-363-26 | s | IC RN5VD28AA-TL |
| IC205 | 6-706-487-01 | s | IC TC7SH08FU(T5RSOYJF) |
| IC207 | 8-759-392-77 | s | IC SN74LVC245APW (E20) |
| IC211 | 8-759-485-24 | s | IC MC74HC4046ADT (R2) |
| IC212 | 8-759-327-01 | s | IC NJM062V-TE2 |
| IC213 | 8-759-675-47 | s | IC SN74LVC04APWR |
| IC214 | 8-759-485-24 | s | IC MC74HC4046ADT (R2) |
| IC271 | 6-702-527-01 | s | IC AK5380VT-E2 |
| IC272 | 8-759-278-58 | s | IC NJM4558V (TE2) |
| IC273 | 8-759-278-58 | s | IC NJM4558V (TE2) |
| IC274 | 8-759-675-47 | s | IC SN74LVC04APWR |
| IC275 | 8-759-675-47 | s | IC SN74LVC04APWR |
| IC276 | 6-706-487-01 | s | IC TC7SH08FU(T5RSOYJF) |
| IC301 | 6-700-563-01 | s | IC AK4552VT-E2 |

(DAP-33 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| IC302 | 8-759-278-58 | s | IC NJM4558V (TE2) |
| IC303 | 8-759-278-58 | s | IC NJM4558V (TE2) |
| IC304 | 8-759-278-58 | s | IC NJM4558V (TE2) |
| IC305 | 8-759-564-49 | s | IC TC7W53FU-TE12R |
| IC306 | 8-759-564-49 | s | IC TC7W53FU-TE12R |
| IC351 | 6-700-563-01 | s | IC AK4552VT-E2 |
| IC352 | 8-759-278-58 | s | IC NJM4558V (TE2) |
| IC353 | 8-759-278-58 | s | IC NJM4558V (TE2) |
| IC354 | 8-759-278-58 | s | IC NJM4558V (TE2) |
| IC355 | 8-759-564-49 | s | IC TC7W53FU-TE12R |
| IC356 | 8-759-564-49 | s | IC TC7W53FU-TE12R |
| IC401 | 6-700-563-01 | s | IC AK4552VT-E2 |
| IC402 | 8-759-278-58 | s | IC NJM4558V (TE2) |
| IC403 | 8-759-278-58 | s | IC NJM4558V (TE2) |
| IC404 | 8-759-278-58 | s | IC NJM4558V (TE2) |
| IC405 | 8-759-826-02 | s | IC NJM2772V(TE2) |
| IC451 | 6-700-563-01 | s | IC AK4552VT-E2 |
| IC452 | 8-759-278-58 | s | IC NJM4558V (TE2) |
| IC453 | 8-759-278-58 | s | IC NJM4558V (TE2) |
| IC454 | 8-759-278-58 | s | IC NJM4558V (TE2) |
| IC455 | 8-759-278-58 | s | IC NJM4558V (TE2) |
| IC456 | 8-759-359-49 | s | IC NJM3414AV (TE2) |
| IC457 | 8-759-564-49 | s | IC TC7W53FU-TE12R |
| IC458 | 8-759-564-49 | s | IC TC7W53FU-TE12R |
| L1 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |
| L2 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |
| L3 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |
| L4 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |
| L6 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L7 | 1-416-344-11 | s | COIL, CHOKE 10UH |
| L8 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L9 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L52 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L201 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L202 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L203 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L204 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |
| L205 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L206 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |
| L252 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L301 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L351 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L401 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L402 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L451 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| Q1 | 8-729-230-27 | s | TRANSISTOR 2SA1213Y-TE12L |
| Q2 | 8-729-230-27 | s | TRANSISTOR 2SA1213Y-TE12L |
| Q3 | 8-729-807-51 | s | TRANSISTOR 2SD1623-S |
| Q11 | 8-729-928-81 | s | TRANSISTOR DTC144EE |
| Q12 | 8-729-928-81 | s | TRANSISTOR DTC144EE |
| Q13 | 8-729-928-81 | s | TRANSISTOR DTC144EE |
| Q401 | 8-729-928-81 | s | TRANSISTOR DTC144EE |
| Q403 | 8-729-053-44 | s | TRANSISTOR 2SK880-Y-TE85R |
| Q404 | 8-729-053-44 | s | TRANSISTOR 2SK880-Y-TE85R |
| R3 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R4 | 1-208-923-11 | s | RESISTOR, CHIP 33K (1005) |
| R5 | 1-208-923-11 | s | RESISTOR, CHIP 33K (1005) |
| R6 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |

(DAP-33 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R7 | 1-208-703-11 | s | RESISTOR,CHIP 6.8K 1/16W(1005) |
| R8 | 1-208-923-11 | s | RESISTOR, CHIP 33K (1005) |
| R11 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R12 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R21 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R22 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R23 | 1-208-923-11 | s | RESISTOR, CHIP 33K (1005) |
| R24 | 1-208-923-11 | s | RESISTOR, CHIP 33K (1005) |
| R25 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R26 | 1-208-931-11 | s | RESISTOR, CHIP 68K (1005) |
| R27 | 1-208-931-11 | s | RESISTOR, CHIP 68K (1005) |
| R28 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R31 | 1-208-931-11 | s | RESISTOR, CHIP 68K (1005) |
| R32 | 1-208-931-11 | s | RESISTOR, CHIP 68K (1005) |
| R33 | 1-208-931-11 | s | RESISTOR, CHIP 68K (1005) |
| R34 | 1-208-931-11 | s | RESISTOR, CHIP 68K (1005) |
| R41 | 1-208-931-11 | s | RESISTOR, CHIP 68K (1005) |
| R44 | 1-208-711-11 | s | RESISTOR CHIP 15K 1/16W (1005) |
| R45 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R47 | 1-208-687-11 | s | RESISTOR CHIP 1.5K 1/16W (1005 |
| R48 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R49 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R50 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R51 | 1-208-699-11 | s | RESISTOR,CHIP 4.7K 1/16W(1005) |
| R55 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R56 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R60 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R61 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R62 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R63 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R64 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R65 | 1-208-671-11 | s | RESISTOR CHIP 330 1/16W (1005) |
| R66 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R67 | 1-208-671-11 | s | RESISTOR CHIP 330 1/16W (1005) |
| R68 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R69 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R70 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R71 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R72 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R73 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R74 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R75 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R76 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R78 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R79 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R80 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R81 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R82 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R83 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R84 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R85 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R86 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R88 | 1-208-931-11 | s | RESISTOR, CHIP 68K (1005) |
| R89 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R90 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R91 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R92 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R93 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R94 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |

(DAP-33 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R95 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R96 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R97 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| *2 R200 | 1-208-635-11 | s | METAL CHIP 10 0.5% 1/16W |
| R201 | 1-208-699-11 | s | RESISTOR,CHIP 4.7K 1/16W(1005) |
| R202 | 1-208-699-11 | s | RESISTOR,CHIP 4.7K 1/16W(1005) |
| R203 | 1-208-699-11 | s | RESISTOR,CHIP 4.7K 1/16W(1005) |
| R204 | 1-208-699-11 | s | RESISTOR,CHIP 4.7K 1/16W(1005) |
| R205 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R206 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R207 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R208 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R209 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R210 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R211 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R212 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R213 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R214 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R215 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R216 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R217 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R220 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R221 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R222 | 1-208-923-11 | s | RESISTOR, CHIP 33K (1005) |
| R223 | 1-208-923-11 | s | RESISTOR, CHIP 33K (1005) |
| R224 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R225 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R226 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R227 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R228 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R229 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R230 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R231 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R232 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R233 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R234 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R235 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R236 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R237 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R238 | 1-218-989-11 | s | RESISTOR,CHIP 1M 1/16W (1005) |
| R240 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R241 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R242 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R243 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R244 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R245 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R246 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R247 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R248 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R249 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R250 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R251 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R252 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R253 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R254 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R255 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R256 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R257 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R258 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |

(DAP-33 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R259 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R260 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R261 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R262 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R263 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R265 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R266 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R267 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R268 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R269 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R271 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R272 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R273 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R274 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R275 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R276 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R277 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R278 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R279 | 1-208-923-11 | s | RESISTOR, CHIP 33K (1005) |
| R280 | 1-208-923-11 | s | RESISTOR, CHIP 33K (1005) |
| R281 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R282 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R283 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R284 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R285 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R286 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R287 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R291 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R292 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R301 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R302 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R303 | 1-208-699-11 | s | RESISTOR,CHIP 4.7K 1/16W(1005) |
| R304 | 1-208-699-11 | s | RESISTOR,CHIP 4.7K 1/16W(1005) |
| R305 | 1-208-699-11 | s | RESISTOR,CHIP 4.7K 1/16W(1005) |
| R306 | 1-208-699-11 | s | RESISTOR,CHIP 4.7K 1/16W(1005) |
| R307 | 1-208-699-11 | s | RESISTOR,CHIP 4.7K 1/16W(1005) |
| R308 | 1-208-699-11 | s | RESISTOR,CHIP 4.7K 1/16W(1005) |
| R309 | 1-208-711-11 | s | RESISTOR CHIP 15K 1/16W (1005) |
| R310 | 1-208-711-11 | s | RESISTOR CHIP 15K 1/16W (1005) |
| R311 | 1-208-711-11 | s | RESISTOR CHIP 15K 1/16W (1005) |
| R312 | 1-208-711-11 | s | RESISTOR CHIP 15K 1/16W (1005) |
| R313 | 1-208-711-11 | s | RESISTOR CHIP 15K 1/16W (1005) |
| R314 | 1-208-711-11 | s | RESISTOR CHIP 15K 1/16W (1005) |
| R315 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R316 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R318 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R319 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R320 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R321 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R322 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R351 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R352 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R353 | 1-208-699-11 | s | RESISTOR,CHIP 4.7K 1/16W(1005) |
| R354 | 1-208-699-11 | s | RESISTOR,CHIP 4.7K 1/16W(1005) |
| R355 | 1-208-699-11 | s | RESISTOR,CHIP 4.7K 1/16W(1005) |
| R356 | 1-208-699-11 | s | RESISTOR,CHIP 4.7K 1/16W(1005) |
| R357 | 1-208-699-11 | s | RESISTOR,CHIP 4.7K 1/16W(1005) |
| R358 | 1-208-699-11 | s | RESISTOR,CHIP 4.7K 1/16W(1005) |
| R359 | 1-208-711-11 | s | RESISTOR CHIP 15K 1/16W (1005) |

(DAP-33 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R360 | 1-208-711-11 | s | RESISTOR CHIP 15K 1/16W (1005) |
| R361 | 1-208-711-11 | s | RESISTOR CHIP 15K 1/16W (1005) |
| R362 | 1-208-711-11 | s | RESISTOR CHIP 15K 1/16W (1005) |
| R363 | 1-208-711-11 | s | RESISTOR CHIP 15K 1/16W (1005) |
| R364 | 1-208-711-11 | s | RESISTOR CHIP 15K 1/16W (1005) |
| R365 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R366 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R368 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R369 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R370 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R371 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R372 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R401 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R402 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R403 | 1-208-699-11 | s | RESISTOR,CHIP 4.7K 1/16W(1005) |
| R404 | 1-208-699-11 | s | RESISTOR,CHIP 4.7K 1/16W(1005) |
| R405 | 1-208-699-11 | s | RESISTOR,CHIP 4.7K 1/16W(1005) |
| R406 | 1-208-699-11 | s | RESISTOR,CHIP 4.7K 1/16W(1005) |
| R407 | 1-208-679-11 | s | RESISTOR CHIP 680 1/16W (1005) |
| R408 | 1-208-679-11 | s | RESISTOR CHIP 680 1/16W (1005) |
| R409 | 1-208-711-11 | s | RESISTOR CHIP 15K 1/16W (1005) |
| R410 | 1-208-711-11 | s | RESISTOR CHIP 15K 1/16W (1005) |
| R411 | 1-208-711-11 | s | RESISTOR CHIP 15K 1/16W (1005) |
| R412 | 1-208-711-11 | s | RESISTOR CHIP 15K 1/16W (1005) |
| R413 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R414 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R415 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R416 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R417 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R418 | 1-208-711-11 | s | RESISTOR CHIP 15K 1/16W (1005) |
| R419 | 1-208-711-11 | s | RESISTOR CHIP 15K 1/16W (1005) |
| R420 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R421 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R423 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R424 | 1-208-943-11 | s | RESISTOR CHIP 220K |
| R425 | 1-208-943-11 | s | RESISTOR CHIP 220K |
| R426 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R427 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R451 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R452 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R453 | 1-208-699-11 | s | RESISTOR,CHIP 4.7K 1/16W(1005) |
| R454 | 1-208-699-11 | s | RESISTOR,CHIP 4.7K 1/16W(1005) |
| R455 | 1-208-699-11 | s | RESISTOR,CHIP 4.7K 1/16W(1005) |
| R456 | 1-208-699-11 | s | RESISTOR,CHIP 4.7K 1/16W(1005) |
| R457 | 1-208-679-11 | s | RESISTOR CHIP 680 1/16W (1005) |
| R458 | 1-208-679-11 | s | RESISTOR CHIP 680 1/16W (1005) |
| R459 | 1-208-711-11 | s | RESISTOR CHIP 15K 1/16W (1005) |
| R460 | 1-208-711-11 | s | RESISTOR CHIP 15K 1/16W (1005) |
| R461 | 1-208-711-11 | s | RESISTOR CHIP 15K 1/16W (1005) |
| R462 | 1-208-711-11 | s | RESISTOR CHIP 15K 1/16W (1005) |
| R463 | 1-208-711-11 | s | RESISTOR CHIP 15K 1/16W (1005) |
| R464 | 1-208-711-11 | s | RESISTOR CHIP 15K 1/16W (1005) |
| R465 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R466 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R467 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R468 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R469 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R470 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R471 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |

(DAP-33 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R472 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R473 | 1-208-943-11 | s | RESISTOR CHIP 220K |
| R474 | 1-208-943-11 | s | RESISTOR CHIP 220K |
| R475 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R476 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R477 | 1-208-691-11 | s | RESISTOR CHIP 2.2K 1/16W(1005) |
| R478 | 1-208-691-11 | s | RESISTOR CHIP 2.2K 1/16W(1005) |
| R479 *1 | 1-208-635-11 | s | METAL CHIP 10 0.5% 1/16W |
| *2 | 1-208-643-11 | s | METAL CHIP 22 0.5% 1/16W |
| R480 *1 | 1-208-635-11 | s | METAL CHIP 10 0.5% 1/16W |
| *2 | 1-208-643-11 | s | METAL CHIP 22 0.5% 1/16W |
| R481 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R482 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R484 | 1-218-989-11 | s | RESISTOR,CHIP 1M 1/16W (1005) |
| R486 | 1-218-989-11 | s | RESISTOR,CHIP 1M 1/16W (1005) |
| R487 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R488 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R489 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R490 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R491 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R492 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R493 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R494 *2 | 1-208-643-11 | s | METAL CHIP 22 0.5% 1/16W |
| R495 *2 | 1-208-643-11 | s | METAL CHIP 22 0.5% 1/16W |
| RB51 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB201 | 1-234-371-11 | s | RES, NETWORK 47X4 (1005) |
| RB202 | 1-234-371-11 | s | RES, NETWORK 47X4 (1005) |
| RB203 | 1-234-371-11 | s | RES, NETWORK 47X4 (1005) |
| RB204 | 1-234-371-11 | s | RES, NETWORK 47X4 (1005) |
| RB205 | 1-234-371-11 | s | RES, NETWORK 47X4 (1005) |
| RB206 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB207 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB210 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB271 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB272 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB273 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB274 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| X1 | 1-813-253-12 | s | OSCILLATOR, CRYSTAL |
| X2 | 1-813-253-12 | s | OSCILLATOR, CRYSTAL |

---

DPR-265 BOARD

---

*1: [Board No. suffix 11]
*2: [Board No. suffix 11, 13]
*3: [Board No. suffix 13-]
*4: [Board No. suffix 14-]

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| 1pc | A-1101-927-A | s | MOUNTED CIRCUIT BOARD, DPR-265 |
| C11 *3 | 1-115-419-91 | s | CERAMIC CHIP 3300PF 5.00% 25V |
| C12 *3 | 1-115-419-91 | s | CERAMIC CHIP 3300PF 5.00% 25V |
| C57 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C58 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C59 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C60 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C61 | 1-100-352-91 | s | CAP, CHIP CERAMIC 1MF B (1608) |
| C101 | 1-127-692-91 | s | CAP, CHIP CERAMIC 10MF B 3216 |
| C102 | 1-127-692-91 | s | CAP, CHIP CERAMIC 10MF B 3216 |
| C103 | 1-100-352-91 | s | CAP, CHIP CERAMIC 1MF B (1608) |
| C104 | 1-100-352-91 | s | CAP, CHIP CERAMIC 1MF B (1608) |
| C105 | 1-100-352-91 | s | CAP, CHIP CERAMIC 1MF B (1608) |
| C106 | 1-100-352-91 | s | CAP, CHIP CERAMIC 1MF B (1608) |
| C107 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C108 *1 | 1-100-620-91 | s | CERAMIC CHIP 47UF 20% 6.3V |
| *3 | 1-127-692-91 | s | CERAMIC CHIP 10UF 10% 16V |
| C109 | 1-100-352-91 | s | CAP, CHIP CERAMIC 1MF B (1608) |
| C110 | 1-100-352-91 | s | CAP, CHIP CERAMIC 1MF B (1608) |
| C111 | 1-100-352-91 | s | CAP, CHIP CERAMIC 1MF B (1608) |
| C112 | 1-100-620-91 | s | CAPACITOR, CHIP 47MF(3225) |
| C113 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C114 | 1-100-352-91 | s | CAP, CHIP CERAMIC 1MF B (1608) |
| C115 | 1-100-352-91 | s | CAP, CHIP CERAMIC 1MF B (1608) |
| C116 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C117 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C119 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C121 | 1-119-923-11 | s | CAPACITOR,CHIP CERAMIC 0.047MF |
| C122 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C123 | 1-119-923-11 | s | CAPACITOR,CHIP CERAMIC 0.047MF |
| C124 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C125 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C126 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C127 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C128 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C129 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C130 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C132 | 1-100-352-91 | s | CAP, CHIP CERAMIC 1MF B (1608) |
| C133 | 1-100-352-91 | s | CAP, CHIP CERAMIC 1MF B (1608) |
| C134 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C136 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C137 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C138 | 1-119-923-11 | s | CAPACITOR,CHIP CERAMIC 0.047MF |
| C139 | 1-119-923-11 | s | CAPACITOR,CHIP CERAMIC 0.047MF |
| C140 | 1-100-620-91 | s | CAPACITOR, CHIP 47MF(3225) |
| C141 | 1-100-352-91 | s | CAP, CHIP CERAMIC 1MF B (1608) |
| C142 | 1-100-620-91 | s | CAPACITOR, CHIP 47MF(3225) |
| C143 | 1-100-620-91 | s | CAPACITOR, CHIP 47MF(3225) |
| C144 | 1-100-620-91 | s | CAPACITOR, CHIP 47MF(3225) |
| C145 | 1-107-819-11 | s | CAP,CERAMIC 22000PF/16V(1005) |
| C146 | 1-164-936-11 | s | CAPACITOR,CHIP CERAMIC 680PF |
| C147 | 1-100-620-91 | s | CAPACITOR, CHIP 47MF(3225) |

(DPR-265 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C148 | 1-107-819-11 | s | CAP,CERAMIC 22000PF/16V(1005) |
| C149 | 1-164-936-11 | s | CAPACITOR,CHIP CERAMIC 680PF |
| C150 | 1-100-620-91 | s | CAPACITOR, CHIP 47MF(3225) |
| C151 | 1-100-620-91 | s | CAPACITOR, CHIP 47MF(3225) |
| C152 | 1-100-620-91 | s | CAPACITOR, CHIP 47MF(3225) |
| C153 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C154 | 1-100-620-91 | s | CAPACITOR, CHIP 47MF(3225) |
| C155 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C156 | 1-100-620-91 | s | CAPACITOR, CHIP 47MF(3225) |
| C157 | 1-100-620-91 | s | CAPACITOR, CHIP 47MF(3225) |
| C158 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C159 | 1-100-620-91 | s | CAPACITOR, CHIP 47MF(3225) |
| C160 | 1-100-620-91 | s | CAPACITOR, CHIP 47MF(3225) |
| C161 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C162 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C163 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C164 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C165 | 1-100-620-91 | s | CAPACITOR, CHIP 47MF(3225) |
| C166 | 1-100-620-91 | s | CAPACITOR, CHIP 47MF(3225) |
| C167 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C168 | 1-164-850-11 | s | CAPACITOR,CHIP CERAMIC 10PF/50 |
| C169 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C170 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C171 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C172 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C173 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C174 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C175 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C176 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C177 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C178 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C179 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C180 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C181 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C182 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C183 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C184 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C185 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C186 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C187 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C188 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C189 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C191 | 1-100-352-91 | s | CAP, CHIP CERAMIC 1MF B (1608) |
| C192 | 1-100-352-91 | s | CAP, CHIP CERAMIC 1MF B (1608) |
| C193 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C194 | 1-100-620-91 | s | CAPACITOR, CHIP 47MF(3225) |
| C195 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C196 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C197 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C198 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C199 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C200 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C201 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C202 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C203 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C204 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C205 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C206 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C207 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |

(DPR-265 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C208 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C209 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C210 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C211 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C212 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C213 | 1-100-352-91 | s | CAP, CHIP CERAMIC 1MF B (1608) |
| C214 | 1-100-352-91 | s | CAP, CHIP CERAMIC 1MF B (1608) |
| C215 | 1-100-352-91 | s | CAP, CHIP CERAMIC 1MF B (1608) |
| C219 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C220 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C221 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C222 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C223 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C224 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C225 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C226 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C227 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C228 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C229 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C230 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C231 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C232 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C233 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C234 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C235 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C236 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C237 | 1-164-858-11 | s | CAPACITOR,CERAMIC 22PF/50V |
| C238 | 1-164-858-11 | s | CAPACITOR,CERAMIC 22PF/50V |
| C239 | 1-164-858-11 | s | CAPACITOR,CERAMIC 22PF/50V |
| C240 | 1-164-840-11 | s | CAPACITOR,CHIP CERAMIC 1.5PF |
| C241 | 1-164-840-11 | s | CAPACITOR,CHIP CERAMIC 1.5PF |
| C242 | 1-164-840-11 | s | CAPACITOR,CHIP CERAMIC 1.5PF |
| C243 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C244 | 1-164-840-11 | s | CAPACITOR,CHIP CERAMIC 1.5PF |
| C245 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C246 | 1-164-840-11 | s | CAPACITOR,CHIP CERAMIC 1.5PF |
| C247 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C248 | 1-164-840-11 | s | CAPACITOR,CHIP CERAMIC 1.5PF |
| C249 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C250 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C251 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C252 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C253 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C254 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C255 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C256 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C257 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C258 | 1-100-742-91 | s | CAP, CERAMIC 2.2MF C (1608) |
| C259 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C260 | 1-100-742-91 | s | CAP, CERAMIC 2.2MF C (1608) |
| C261 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C262 | 1-100-742-91 | s | CAP, CERAMIC 2.2MF C (1608) |
| C263 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C264 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C265 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C266 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C267 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C268 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C269 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |

(DPR-265 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C270 | 1-100-507-91 | s | CAPACITOR,CERAMIC4.7MF C(1608) |
| C271 | 1-100-507-91 | s | CAPACITOR,CERAMIC4.7MF C(1608) |
| C272 | 1-100-507-91 | s | CAPACITOR,CERAMIC4.7MF C(1608) |
| C273 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C274 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C275 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C276 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C277 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C278 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C279 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C280 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C281 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C282 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C283 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C284 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C285 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C286 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C287 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C288 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C289 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C290 | 1-100-352-91 | s | CAP, CHIP CERAMIC 1MF B (1608) |
| C291 | 1-100-352-91 | s | CAP, CHIP CERAMIC 1MF B (1608) |
| C292 | 1-100-352-91 | s | CAP, CHIP CERAMIC 1MF B (1608) |
| C296 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C297 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C298 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C299 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C300 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C301 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C302 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C303 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C304 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C305 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C306 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C307 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C308 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C309 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C310 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C311 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C312 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C313 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C314 | 1-164-858-11 | s | CAPACITOR,CERAMIC 22PF/50V |
| C315 | 1-164-858-11 | s | CAPACITOR,CERAMIC 22PF/50V |
| C316 | 1-164-858-11 | s | CAPACITOR,CERAMIC 22PF/50V |
| C317 | 1-164-840-11 | s | CAPACITOR,CHIP CERAMIC 1.5PF |
| C318 | 1-164-840-11 | s | CAPACITOR,CHIP CERAMIC 1.5PF |
| C319 | 1-164-840-11 | s | CAPACITOR,CHIP CERAMIC 1.5PF |
| C320 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C321 | 1-164-840-11 | s | CAPACITOR,CHIP CERAMIC 1.5PF |
| C322 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C323 | 1-164-840-11 | s | CAPACITOR,CHIP CERAMIC 1.5PF |
| C324 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C325 | 1-164-840-11 | s | CAPACITOR,CHIP CERAMIC 1.5PF |
| C326 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C327 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C328 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C329 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C330 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C331 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |

(DPR-265 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C332 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C333 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C334 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C335 | 1-100-742-91 | s | CAP, CERAMIC 2.2MF C (1608) |
| C336 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C337 | 1-100-742-91 | s | CAP, CERAMIC 2.2MF C (1608) |
| C338 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C339 | 1-100-742-91 | s | CAP, CERAMIC 2.2MF C (1608) |
| C340 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C341 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C342 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C343 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C344 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C345 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C346 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C347 | 1-100-507-91 | s | CAPACITOR,CERAMIC4.7MF C(1608) |
| C348 | 1-100-507-91 | s | CAPACITOR,CERAMIC4.7MF C(1608) |
| C349 | 1-100-507-91 | s | CAPACITOR,CERAMIC4.7MF C(1608) |
| C350 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C351 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C352 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C353 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C354 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C355 | 1-100-620-91 | s | CAPACITOR, CHIP 47MF(3225) |
| C356 | 1-100-620-91 | s | CAPACITOR, CHIP 47MF(3225) |
| C357 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C358 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C359 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C360 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C361 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C362 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C371 | 1-100-352-91 | s | CAP, CHIP CERAMIC 1MF B (1608) |
| C372 | 1-100-352-91 | s | CAP, CHIP CERAMIC 1MF B (1608) |
| C373 | 1-100-352-91 | s | CAP, CHIP CERAMIC 1MF B (1608) |
| C374 | 1-100-352-91 | s | CAP, CHIP CERAMIC 1MF B (1608) |
| C375 | 1-100-352-91 | s | CAP, CHIP CERAMIC 1MF B (1608) |
| C376 | 1-100-352-91 | s | CAP, CHIP CERAMIC 1MF B (1608) |
| C377 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C399 | 1-100-352-91 | s | CAP, CHIP CERAMIC 1MF B (1608) |
| C401 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C402 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C403 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C404 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C405 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C406 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C407 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C408 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C409 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C410 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C411 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C412 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C413 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C414 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C415 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C416 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C417 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C418 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C419 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C420 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |

(DPR-265 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C421 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C422 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C423 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C424 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C425 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C426 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C427 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C428 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C429 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C430 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C431 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C432 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C433 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C434 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C435 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C436 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C437 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C438 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C439 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C440 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C441 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C442 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C443 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C444 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C445 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C446 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C447 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C448 | 1-100-507-91 | s | CAPACITOR,CERAMIC4.7MF C(1608) |
| C449 | 1-100-507-91 | s | CAPACITOR,CERAMIC4.7MF C(1608) |
| C450 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C451 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C452 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C453 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C454 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C455 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C456 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C457 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C458 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C459 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C460 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C461 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C462 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C463 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C464 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C501 | 1-107-826-11 | s | CAPACITOR,CHIP CERAMIC 0.1MF |
| C502 | 1-107-826-11 | s | CAPACITOR,CHIP CERAMIC 0.1MF |
| C503 | 1-107-826-11 | s | CAPACITOR,CHIP CERAMIC 0.1MF |
| C504 | 1-107-826-11 | s | CAPACITOR,CHIP CERAMIC 0.1MF |
| C505 | 1-100-620-91 | s | CAPACITOR, CHIP 47MF(3225) |
| C506 | 1-100-620-91 | s | CAPACITOR, CHIP 47MF(3225) |
| C507 | 1-127-956-11 | s | CAPACITOR,CHIP FILM 0.1MF |
| C508 | 1-127-956-11 | s | CAPACITOR,CHIP FILM 0.1MF |
| C509 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C510 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C511 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C512 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C513 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C514 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C515 | 1-127-956-11 | s | CAPACITOR,CHIP FILM 0.1MF |

(DPR-265 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C516 | 1-127-956-11 | s | CAPACITOR,CHIP FILM 0.1MF |
| C517 | 1-127-950-11 | s | CAPACITOR,CHIP FILM 0.01MF |
| C518 | 1-127-950-11 | s | CAPACITOR,CHIP FILM 0.01MF |
| C519 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C520 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C521 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C522 | 1-164-850-11 | s | CAPACITOR,CHIP CERAMIC 10PF/50 |
| C523 | 1-164-850-11 | s | CAPACITOR,CHIP CERAMIC 10PF/50 |
| C524 | 1-164-850-11 | s | CAPACITOR,CHIP CERAMIC 10PF/50 |
| C525 | 1-164-850-11 | s | CAPACITOR,CHIP CERAMIC 10PF/50 |
| C526 | 1-164-850-11 | s | CAPACITOR,CHIP CERAMIC 10PF/50 |
| C527 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C528 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C529 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C530 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C531 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C532 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C533 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C534 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C535 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C538 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C542 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C543 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C544 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C545 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C546 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C547 | 1-107-826-11 | s | CAPACITOR,CHIP CERAMIC 0.1MF |
| C548 | 1-107-826-11 | s | CAPACITOR,CHIP CERAMIC 0.1MF |
| C602 | 1-100-352-91 | s | CAP, CHIP CERAMIC 1MF B (1608) |
| C604 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C605 | 1-164-939-11 | s | CAPACITOR,CHIP CERAMIC 2200PF |
| C606 | 1-100-352-91 | s | CAP, CHIP CERAMIC 1MF B (1608) |
| C607 | 1-100-352-91 | s | CAP, CHIP CERAMIC 1MF B (1608) |
| C608 | 1-100-352-91 | s | CAP, CHIP CERAMIC 1MF B (1608) |
| C609 | 1-100-352-91 | s | CAP, CHIP CERAMIC 1MF B (1608) |
| C610 | 1-127-760-11 | s | CAPACITOR,CERAMIC 4.7MF/6.3V |
| C611 | 1-127-760-11 | s | CAPACITOR,CERAMIC 4.7MF/6.3V |
| C612 | 1-100-352-91 | s | CAP, CHIP CERAMIC 1MF B (1608) |
| C613 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C614 | 1-100-352-91 | s | CAP, CHIP CERAMIC 1MF B (1608) |
| C615 | 1-100-352-91 | s | CAP, CHIP CERAMIC 1MF B (1608) |
| C616 | 1-127-760-11 | s | CAPACITOR,CERAMIC 4.7MF/6.3V |
| C617 | 1-100-352-91 | s | CAP, CHIP CERAMIC 1MF B (1608) |
| C618 | 1-100-352-91 | s | CAP, CHIP CERAMIC 1MF B (1608) |
| C619 | 1-100-352-91 | s | CAP, CHIP CERAMIC 1MF B (1608) |
| C620 | 1-127-760-11 | s | CAPACITOR,CERAMIC 4.7MF/6.3V |
| C621 | 1-127-760-11 | s | CAPACITOR,CERAMIC 4.7MF/6.3V |
| C622 | 1-127-760-11 | s | CAPACITOR,CERAMIC 4.7MF/6.3V |
| C623 | 1-127-760-11 | s | CAPACITOR,CERAMIC 4.7MF/6.3V |
| C624 | 1-100-352-91 | s | CAP, CHIP CERAMIC 1MF B (1608) |
| C625 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C626 | 1-100-352-91 | s | CAP, CHIP CERAMIC 1MF B (1608) |
| C627 | 1-100-352-91 | s | CAP, CHIP CERAMIC 1MF B (1608) |
| C628 | 1-100-620-91 | s | CAPACITOR, CHIP 47MF(3225) |
| C629 | 1-127-760-11 | s | CAPACITOR,CERAMIC 4.7MF/6.3V |
| C630 | 1-127-760-11 | s | CAPACITOR,CERAMIC 4.7MF/6.3V |
| C631 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C632 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C633 | 1-100-352-91 | s | CAP, CHIP CERAMIC 1MF B (1608) |

(DPR-265 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C634 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C701 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C702 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C703 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C704 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C705 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C706 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C707 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C708 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C709 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C710 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C711 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C712 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C713 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C714 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C715 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C716 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C717 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C718 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C719 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C720 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C721 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C722 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C723 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C724 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C727 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C728 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C729 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C730 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C731 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C732 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C733 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C734 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C735 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C736 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C737 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C738 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C739 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C740 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C741 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C742 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C743 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C744 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C745 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C746 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C747 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C748 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C749 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C752 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C753 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C754 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C755 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C756 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C757 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C758 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C759 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C760 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C761 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C762 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |

(DPR-265 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C763 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C764 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C765 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C766 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C767 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C768 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C769 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C770 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C771 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C772 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C773 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C774 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C775 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C776 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C777 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C778 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C788 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C789 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C790 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C791 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C792 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C793 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C794 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C795 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C796 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C797 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C798 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C799 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C800 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C801 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C802 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C803 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C804 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C805 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C806 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C807 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C808 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C809 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C810 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C820 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C821 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C822 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C823 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C824 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C825 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C826 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C827 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C828 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C829 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C830 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C831 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C832 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C833 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C834 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C835 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C836 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C837 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C838 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C839 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |

(DPR-265 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C840 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C841 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C842 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C843 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C844 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C845 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C846 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C847 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C848 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C849 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C850 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C851 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C852 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C853 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C854 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C855 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C856 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C857 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C858 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C865 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C866 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C867 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C868 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C869 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C870 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C871 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C872 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C873 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C874 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C875 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C876 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C877 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C878 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C879 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C880 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C881 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C882 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C883 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C884 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C885 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C886 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C887 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C888 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C889 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C890 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C891 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C892 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C896 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C897 | 1-100-352-91 | s | CAP, CHIP CERAMIC 1MF B (1608) |
| C900 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C901 | 1-107-819-11 | s | CAP,CERAMIC 22000PF/16V(1005) |
| C902 | 1-107-819-11 | s | CAP,CERAMIC 22000PF/16V(1005) |
| C903 | 1-107-819-11 | s | CAP,CERAMIC 22000PF/16V(1005) |
| C904 | 1-107-819-11 | s | CAP,CERAMIC 22000PF/16V(1005) |
| C905 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C906 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C907 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C908 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C909 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |

(DPR-265 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C910 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C911 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C912 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C913 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C914 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C915 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C916 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C917 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C918 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C919 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C920 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C921 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C922 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C923 | 1-107-819-11 | s | CAP,CERAMIC 22000PF/16V(1005) |
| C924 | 1-107-819-11 | s | CAP,CERAMIC 22000PF/16V(1005) |
| C925 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C926 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C927 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C928 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C929 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C930 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C931 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C932 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C933 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C934 | 1-107-819-11 | s | CAP,CERAMIC 22000PF/16V(1005) |
| C935 | 1-107-819-11 | s | CAP,CERAMIC 22000PF/16V(1005) |
| C936 | 1-107-819-11 | s | CAP,CERAMIC 22000PF/16V(1005) |
| C937 | 1-107-819-11 | s | CAP,CERAMIC 22000PF/16V(1005) |
| C938 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C939 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C940 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C941 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C942 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C943 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C944 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C945 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C946 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C947 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C948 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C949 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C950 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C951 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C952 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C953 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C954 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C955 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C956 | 1-107-819-11 | s | CAP,CERAMIC 22000PF/16V(1005) |
| C957 | 1-107-819-11 | s | CAP,CERAMIC 22000PF/16V(1005) |
| C958 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C959 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C960 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C961 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C962 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C963 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C964 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C965 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C966 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C967 | 1-107-819-11 | s | CAP,CERAMIC 22000PF/16V(1005) |
| C968 | 1-107-819-11 | s | CAP,CERAMIC 22000PF/16V(1005) |

(DPR-265 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C969 | 1-107-819-11 | s | CAP,CERAMIC 22000PF/16V(1005) |
| C970 | 1-107-819-11 | s | CAP,CERAMIC 22000PF/16V(1005) |
| C971 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C972 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C973 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C974 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C975 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C976 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C977 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C978 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C979 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C980 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C981 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C982 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C983 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C984 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C985 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C986 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C987 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C988 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C989 | 1-107-819-11 | s | CAP,CERAMIC 22000PF/16V(1005) |
| C990 | 1-107-819-11 | s | CAP,CERAMIC 22000PF/16V(1005) |
| C991 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C992 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C993 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C994 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C995 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C996 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C997 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C998 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C999 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| CN601 | 1-764-243-11 | o | CONNECTOR (COAXIAL) |
| D11 | 8-719-064-52 | s | DIODE CL-191YG-CD-T |
| D102 | 8-719-017-03 | s | DIODE 02DZ4.7-TPH3 |
| D103 | 8-719-017-03 | s | DIODE 02DZ4.7-TPH3 |
| D104 | 8-719-820-41 | s | DIODE 1SS302 |
| D501 | 8-719-820-41 | s | DIODE 1SS302 |
| D502 | 8-719-820-41 | s | DIODE 1SS302 |
| D504 | 8-719-820-41 | s | DIODE 1SS302 |
| D505 | 8-719-820-41 | s | DIODE 1SS302 |
| D506 | 8-719-820-41 | s | DIODE 1SS302 |
| D507 | 8-719-820-41 | s | DIODE 1SS302 |
| E1 | 1-535-877-22 | s | CHIP,CHECKER (TEST POINT) |
| E2 | 1-535-877-22 | s | CHIP,CHECKER (TEST POINT) |
| FB101 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB102 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB103 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB104 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB105 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB106 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB107 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB108 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB501 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB502 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB503 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB602 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB603 | 1-469-094-21 | s | FERRITE, EMI (SMD) |

(DPR-265 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| FB604 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB605 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB606 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB607 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB608 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB609 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB610 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB611 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB612 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB613 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB901 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB902 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB903 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB904 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB905 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB906 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB907 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB908 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB909 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB910 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB911 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB912 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB913 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB914 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB915 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB916 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB917 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB918 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB919 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB920 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB921 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB922 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB923 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB924 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB925 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB926 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB927 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FL201 | 1-813-542-11 | s | FILTER, LOW PASS |
| FL202 | 1-813-542-11 | s | FILTER, LOW PASS |
| FL203 | 1-813-542-11 | s | FILTER, LOW PASS |
| FL204 | 1-813-542-11 | s | FILTER, LOW PASS |
| FL205 | 1-813-542-11 | s | FILTER, LOW PASS |
| FL206 | 1-813-542-11 | s | FILTER, LOW PASS |
| IC101 | 6-704-976-01 | s | IC ADR381ART-REEL7 |
| IC102 | 8-759-327-01 | s | IC NJM062V-TE2 |
| IC103 | 8-759-327-01 | s | IC NJM062V-TE2 |
| IC104 | 6-701-572-01 | s | IC TPS54610PWPR |
| IC105 | 6-701-572-01 | s | IC TPS54610PWPR |
| IC106 | 6-706-482-01 | s | IC TC7SH00FU(T5RSOYJF) |
| IC107 | 8-759-392-77 | s | IC SN74LVC245APW (E20) |
| IC108 | 8-759-392-77 | s | IC SN74LVC245APW (E20) |
| IC110 | 8-759-346-27 | s | IC LM45BIM3X |
| IC111 | 6-706-487-01 | s | IC TC7SH08FU(T5RSOYJF) |
| IC201 | 6-706-863-01 | s | IC LMH6732MFX/NOPB |
| IC202 | 6-706-863-01 | s | IC LMH6732MFX/NOPB |
| IC203 | 6-706-863-01 | s | IC LMH6732MFX/NOPB |
| IC204 | 6-708-676-01 | s | IC AD8138ARMZ-REEL7 |
| IC205 | 6-708-676-01 | s | IC AD8138ARMZ-REEL7 |

(DPR-265 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| IC206 | 6-708-676-01 | s | IC AD8138ARMZ-REEL7 |
| IC208 | 6-708-675-01 | s | IC LTC2249IUH#TR-500 |
| IC209 | 6-708-675-01 | s | IC LTC2249IUH#TR-500 |
| IC210 | 8-759-564-49 | s | IC TC7W53FU-TE12R |
| IC211 | 8-759-564-49 | s | IC TC7W53FU-TE12R |
| IC212 | 8-759-564-49 | s | IC TC7W53FU-TE12R |
| IC213 | 6-706-863-01 | s | IC LMH6732MFX/NOPB |
| IC214 | 6-706-863-01 | s | IC LMH6732MFX/NOPB |
| IC215 | 6-706-863-01 | s | IC LMH6732MFX/NOPB |
| IC216 | 6-708-676-01 | s | IC AD8138ARMZ-REEL7 |
| IC217 | 6-708-676-01 | s | IC AD8138ARMZ-REEL7 |
| IC218 | 6-708-676-01 | s | IC AD8138ARMZ-REEL7 |
| IC219 | 6-708-675-01 | s | IC LTC2249IUH#TR-500 |
| IC220 | 6-708-675-01 | s | IC LTC2249IUH#TR-500 |
| IC221 | 6-708-675-01 | s | IC LTC2249IUH#TR-500 |
| IC222 | 8-759-564-49 | s | IC TC7W53FU-TE12R |
| IC223 | 8-759-564-49 | s | IC TC7W53FU-TE12R |
| IC224 | 8-759-564-49 | s | IC TC7W53FU-TE12R |
| IC225 | 8-759-327-01 | s | IC NJM062V-TE2 |
| IC226 | 8-759-327-01 | s | IC NJM062V-TE2 |
| IC227 | 8-759-327-01 | s | IC NJM062V-TE2 |
| IC228 | 8-759-327-01 | s | IC NJM062V-TE2 |
| IC230 | 6-700-915-01 | s | IC SN74AHCT04PWR |
| IC231 | 6-700-915-01 | s | IC SN74AHCT04PWR |
| IC232 | 6-708-675-01 | s | IC LTC2249IUH#TR-500 |
| IC302 | 6-700-804-01 | s | IC SN74LVC574APWR |
| IC303 | 6-700-804-01 | s | IC SN74LVC574APWR |
| IC304 | 6-700-804-01 | s | IC SN74LVC574APWR |
| IC305 | 6-700-804-01 | s | IC SN74LVC574APWR |
| IC306 | 6-700-804-01 | s | IC SN74LVC574APWR |
| IC307 | 6-700-804-01 | s | IC SN74LVC574APWR |
| IC308 | 6-700-804-01 | s | IC SN74LVC574APWR |
| IC310 | 6-706-487-01 | s | IC TC7SH08FU(T5RSOYJF) |
| IC402 | 6-705-983-01 | s | IC IS42S32200B-6TL-TR |
| IC403 *1 | 6-709-435-01 | s | IC IS42S32200C1-6TL-TR |
| IC405 *3 | 6-709-435-01 | s | IC IS42S32200C1-6TL-TR |
| IC501 | 8-759-485-24 | s | IC MC74HC4046ADT (R2) |
| IC502 | 8-759-485-24 | s | IC MC74HC4046ADT (R2) |
| IC503 | 8-759-564-49 | s | IC TC7W53FU-TE12R |
| IC504 | 8-759-564-49 | s | IC TC7W53FU-TE12R |
| IC505 | 8-759-564-49 | s | IC TC7W53FU-TE12R |
| IC506 | 8-759-675-47 | s | IC SN74LVC04APWR |
| IC507 | 8-759-675-47 | s | IC SN74LVC04APWR |
| IC509 | 6-702-787-01 | s | IC UPD6467GR-525-E2 |
| IC510 | 6-702-787-01 | s | IC UPD6467GR-525-E2 |
| IC511 | 8-759-970-59 | s | IC TLC272CPS |
| IC512 | 6-706-478-01 | s | IC TC7SET08FU(T5RSOJF) |
| IC513 | 6-706-478-01 | s | IC TC7SET08FU(T5RSOJF) |
| IC514 | 6-706-478-01 | s | IC TC7SET08FU(T5RSOJF) |
| IC515 | 6-706-478-01 | s | IC TC7SET08FU(T5RSOJF) |
| IC516 | 8-759-592-42 | s | IC TC7SZ00FU(TE85R) |
| IC517 | 8-759-592-42 | s | IC TC7SZ00FU(TE85R) |
| IC518 | 8-759-592-42 | s | IC TC7SZ00FU(TE85R) |
| IC519 | 8-759-592-42 | s | IC TC7SZ00FU(TE85R) |
| IC520 | 8-759-592-42 | s | IC TC7SZ00FU(TE85R) |
| IC521 | 8-759-592-42 | s | IC TC7SZ00FU(TE85R) |
| IC522 | 6-706-487-01 | s | IC TC7SH08FU(T5RSOYJF) |
| IC523 | 6-706-487-01 | s | IC TC7SH08FU(T5RSOYJF) |
| IC601 | 6-706-482-01 | s | IC TC7SH00FU(T5RSOYJF) |

(DPR-265 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| IC602 | 6-703-693-01 | s | IC GS1532-CFE3 |
| IC603 | 6-702-621-01 | s | IC GS1528-CKAE3 |
| IC604 | 6-700-655-01 | s | IC LT1963ES8#TR |
| IC802 | 8-759-679-57 | s | IC SN74LVC00APWR |
| IC803 | 8-759-592-42 | s | IC TC7SZ00FU(TE85R) |
| IC804 | 6-706-487-01 | s | IC TC7SH08FU(T5RSOYJF) |
| IC805 | 6-706-487-01 | s | IC TC7SH08FU(T5RSOYJF) |
| IC901 | 6-706-350-01 | s | IC EDD2516AKTA-6B-E |
| IC902 | 6-706-350-01 | s | IC EDD2516AKTA-6B-E |
| IC903 | 6-706-350-01 | s | IC EDD2516AKTA-6B-E |
| IC904 | 6-706-350-01 | s | IC EDD2516AKTA-6B-E |
| IC905 | 6-706-350-01 | s | IC EDD2516AKTA-6B-E |
| IC906 | 6-706-350-01 | s | IC EDD2516AKTA-6B-E |
| L101 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |
| L102 | 1-416-948-21 | s | COIL, CHOKE (SMD) |
| L103 | 1-416-948-21 | s | COIL, CHOKE (SMD) |
| L104 | 1-419-491-21 | s | COIL, CHOKE 10UH |
| L105 *1 | 1-419-630-21 | s | INDUCTOR 4.7UH |
| *3 | 1-414-392-41 | s | INDUCTOR 1UH |
| L106 *3 | 1-414-392-41 | s | INDUCTOR 1UH |
| L107 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |
| L108 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |
| L109 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L111 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L112 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L201 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L202 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L203 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L204 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L205 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L206 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L207 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L208 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L209 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L210 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L211 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L212 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L213 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L214 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L215 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L216 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L217 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L218 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L219 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L220 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L221 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L222 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L401 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |
| L402 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |
| L403 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |
| L404 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |
| L405 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |
| L406 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |
| L407 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |
| L501 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L502 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L503 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L504 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L505 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |

(DPR-265 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| L506 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L507 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L508 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |
| L509 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |
| L510 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L511 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L512 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L601 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |
| L602 | 1-414-457-11 | s | INDUCTOR, CHIP (S) 3.3NH |
| L603 | 1-414-457-11 | s | INDUCTOR, CHIP (S) 3.3NH |
| L801 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |
| L802 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |
| L803 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |
| L804 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |
| L805 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |
| L806 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| Q11 | 8-729-928-27 | s | TRANSISTOR DTA144EE |
| Q101 | 8-729-230-27 | s | TRANSISTOR 2SA1213Y-TE12L |
| Q102 | 8-729-230-27 | s | TRANSISTOR 2SA1213Y-TE12L |
| Q103 | 8-729-807-51 | s | TRANSISTOR 2SD1623-S |
| Q104 | 8-729-230-27 | s | TRANSISTOR 2SA1213Y-TE12L |
| Q105 | 8-729-927-99 | s | TRANSISTOR 2SC4617R |
| Q106 | 8-729-927-99 | s | TRANSISTOR 2SC4617R |
| Q107 | 8-729-928-19 | s | TRANSISTOR 2SA1774R |
| Q108 | 8-729-927-99 | s | TRANSISTOR 2SC4617R |
| Q201 | 8-729-928-19 | s | TRANSISTOR 2SA1774R |
| Q202 | 8-729-927-99 | s | TRANSISTOR 2SC4617R |
| Q203 | 8-729-041-23 | s | TRANSISTOR NDS356AP |
| Q204 | 8-729-041-24 | s | TRANSISTOR NDS355AN |
| Q501 | 8-729-928-81 | s | TRANSISTOR DTC144EE |
| Q502 | 8-729-928-81 | s | TRANSISTOR DTC144EE |
| Q503 | 8-729-928-81 | s | TRANSISTOR DTC144EE |
| Q504 | 8-729-928-19 | s | TRANSISTOR 2SA1774R |
| Q505 | 8-729-928-19 | s | TRANSISTOR 2SA1774R |
| Q506 | 8-729-928-19 | s | TRANSISTOR 2SA1774R |
| Q507 | 8-729-928-19 | s | TRANSISTOR 2SA1774R |
| Q601 | 8-729-927-99 | s | TRANSISTOR 2SC4617R |
| Q602 | 8-729-041-23 | s | TRANSISTOR NDS356AP |
| Q603 | 8-729-928-81 | s | TRANSISTOR DTC144EE |
| Q604 | 8-729-928-19 | s | TRANSISTOR 2SA1774R |
| R11 *3 | 1-220-230-91 | s | METAL CHIP 2.2 10% 1/4W |
| R12 *3 | 1-220-230-91 | s | METAL CHIP 2.2 10% 1/4W |
| R101 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R102 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R103 | 1-208-933-11 | s | RESISTOR CHIP 82K |
| R104 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R105 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R106 | 1-218-953-11 | s | RESISTOR, CHIP 1K 1/16W |
| R107 | 1-218-953-11 | s | RESISTOR, CHIP 1K 1/16W |
| R108 | 1-218-977-11 | s | RESISTOR,CHIP 100K 1/16W(1005) |
| R109 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R111 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R112 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R113 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R114 | 1-208-923-11 | s | RESISTOR, CHIP 33K (1005) |
| R115 | 1-208-923-11 | s | RESISTOR, CHIP 33K (1005) |
| R116 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R117 | 1-208-703-11 | s | RESISTOR,CHIP 6.8K 1/16W(1005) |

(DPR-265 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R118 | 1-208-923-11 | s | RESISTOR, CHIP 33K (1005) |
| R119 | 1-218-973-11 | s | RESISTOR,CHIP 47K 1/16W (1005) |
| R120 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R121 | 1-218-953-11 | s | RESISTOR, CHIP 1K 1/16W |
| R122 | 1-218-965-11 | s | RESISTOR, CHIP 10K 1/16W |
| R123 | 1-208-931-11 | s | RESISTOR, CHIP 68K (1005) |
| R124 | 1-208-687-11 | s | RESISTOR CHIP 1.5K 1/16W (1005 |
| R125 | 1-208-687-11 | s | RESISTOR CHIP 1.5K 1/16W (1005 |
| R126 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R127 | 1-208-931-11 | s | RESISTOR, CHIP 68K (1005) |
| R128 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R129 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R130 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R131 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R132 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R133 | 1-208-699-11 | s | RESISTOR,CHIP 4.7K 1/16W(1005) |
| R134 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R135 | 1-208-931-11 | s | RESISTOR, CHIP 68K (1005) |
| R136 | 1-208-905-11 | s | RESISTOR, CHIP 5.6K (1005) |
| R137 | 1-208-679-11 | s | RESISTOR CHIP 680 1/16W (1005) |
| R138 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R141 | 1-218-937-11 | s | RESISTOR, CHIP 47 |
| R142 | 1-218-937-11 | s | RESISTOR, CHIP 47 |
| R143 | 1-218-937-11 | s | RESISTOR, CHIP 47 |
| R144 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R145 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R146 | 1-216-809-11 | s | RESISTOR,CHIP 100 1/10W 1608 |
| R147 | 1-216-809-11 | s | RESISTOR,CHIP 100 1/10W 1608 |
| R148 | 1-216-809-11 | s | RESISTOR,CHIP 100 1/10W 1608 |
| R149 | 1-216-809-11 | s | RESISTOR,CHIP 100 1/10W 1608 |
| R150 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R151 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R152 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R153 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R154 | 1-218-929-11 | s | RESISTOR,CHIP 10 1/16W (1005) |
| R155 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R166 | 1-218-965-11 | s | RESISTOR, CHIP 10K 1/16W |
| R167 | 1-218-965-11 | s | RESISTOR, CHIP 10K 1/16W |
| R168 | 1-218-973-11 | s | RESISTOR,CHIP 47K 1/16W (1005) |
| R169 | 1-208-931-11 | s | RESISTOR, CHIP 68K (1005) |
| R170 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R171 | 1-208-679-11 | s | RESISTOR CHIP 680 1/16W (1005) |
| R172 | 1-218-937-11 | s | RESISTOR, CHIP 47 |
| R173 | 1-218-973-11 | s | RESISTOR,CHIP 47K 1/16W (1005) |
| R174 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R201 | 1-218-965-11 | s | RESISTOR, CHIP 10K 1/16W |
| R202 | 1-218-965-11 | s | RESISTOR, CHIP 10K 1/16W |
| R203 | 1-218-965-11 | s | RESISTOR, CHIP 10K 1/16W |
| R204 | 1-208-679-11 | s | RESISTOR CHIP 680 1/16W (1005) |
| R205 | 1-208-679-11 | s | RESISTOR CHIP 680 1/16W (1005) |
| R206 | 1-208-679-11 | s | RESISTOR CHIP 680 1/16W (1005) |
| R207 | 1-208-679-11 | s | RESISTOR CHIP 680 1/16W (1005) |
| R208 | 1-208-679-11 | s | RESISTOR CHIP 680 1/16W (1005) |
| R209 | 1-208-679-11 | s | RESISTOR CHIP 680 1/16W (1005) |
| R210 | 1-218-937-11 | s | RESISTOR, CHIP 47 |
| R211 | 1-218-937-11 | s | RESISTOR, CHIP 47 |
| R212 | 1-218-937-11 | s | RESISTOR, CHIP 47 |
| R213 | 1-218-969-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R214 | 1-218-969-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |

(DPR-265 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R215 | 1-218-969-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R216 | 1-218-973-11 | s | RESISTOR,CHIP 47K 1/16W (1005) |
| R217 | 1-218-973-11 | s | RESISTOR,CHIP 47K 1/16W (1005) |
| R218 | 1-218-973-11 | s | RESISTOR,CHIP 47K 1/16W (1005) |
| R219 | 1-208-691-11 | s | RESISTOR CHIP 2.2K 1/16W(1005) |
| R220 | 1-208-691-11 | s | RESISTOR CHIP 2.2K 1/16W(1005) |
| R221 | 1-208-691-11 | s | RESISTOR CHIP 2.2K 1/16W(1005) |
| R222 | 1-208-885-11 | s | RESISTOR, CHIP 820 1/16W(1005) |
| R223 | 1-218-977-11 | s | RESISTOR,CHIP 100K 1/16W(1005) |
| R224 | 1-208-885-11 | s | RESISTOR, CHIP 820 1/16W(1005) |
| R225 | 1-218-977-11 | s | RESISTOR,CHIP 100K 1/16W(1005) |
| R226 | 1-208-885-11 | s | RESISTOR, CHIP 820 1/16W(1005) |
| R227 | 1-218-977-11 | s | RESISTOR,CHIP 100K 1/16W(1005) |
| R228 | 1-208-671-11 | s | RESISTOR CHIP 330 1/16W (1005) |
| R229 | 1-208-671-11 | s | RESISTOR CHIP 330 1/16W (1005) |
| R230 | 1-208-671-11 | s | RESISTOR CHIP 330 1/16W (1005) |
| R234 | 1-218-961-11 | s | RESISTOR, CHIP 4.7K 1/16W |
| R235 | 1-218-961-11 | s | RESISTOR, CHIP 4.7K 1/16W |
| R236 | 1-218-961-11 | s | RESISTOR, CHIP 4.7K 1/16W |
| R237 | 1-208-679-11 | s | RESISTOR CHIP 680 1/16W (1005) |
| R238 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R239 | 1-208-679-11 | s | RESISTOR CHIP 680 1/16W (1005) |
| R240 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R241 | 1-208-679-11 | s | RESISTOR CHIP 680 1/16W (1005) |
| R242 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R243 | 1-208-675-11 | s | RESISTOR CHIP 470 1/16W (1005) |
| R244 | 1-208-675-11 | s | RESISTOR CHIP 470 1/16W (1005) |
| R245 | 1-208-675-11 | s | RESISTOR CHIP 470 1/16W (1005) |
| R246 | 1-208-675-11 | s | RESISTOR CHIP 470 1/16W (1005) |
| R247 | 1-208-675-11 | s | RESISTOR CHIP 470 1/16W (1005) |
| R248 | 1-208-675-11 | s | RESISTOR CHIP 470 1/16W (1005) |
| R249 | 1-208-671-11 | s | RESISTOR CHIP 330 1/16W (1005) |
| R250 | 1-208-671-11 | s | RESISTOR CHIP 330 1/16W (1005) |
| R251 | 1-208-671-11 | s | RESISTOR CHIP 330 1/16W (1005) |
| R252 | 1-208-671-11 | s | RESISTOR CHIP 330 1/16W (1005) |
| R253 | 1-208-671-11 | s | RESISTOR CHIP 330 1/16W (1005) |
| R254 | 1-208-671-11 | s | RESISTOR CHIP 330 1/16W (1005) |
| R255 | 1-218-953-11 | s | RESISTOR, CHIP 1K 1/16W |
| R256 | 1-218-953-11 | s | RESISTOR, CHIP 1K 1/16W |
| R257 | 1-218-953-11 | s | RESISTOR, CHIP 1K 1/16W |
| R258 | 1-216-803-11 | s | RESISTOR,CHIP 33 1/10W (1608) |
| R259 | 1-216-803-11 | s | RESISTOR,CHIP 33 1/10W (1608) |
| R260 | 1-216-803-11 | s | RESISTOR,CHIP 33 1/10W (1608) |
| R261 | 1-216-803-11 | s | RESISTOR,CHIP 33 1/10W (1608) |
| R262 | 1-216-803-11 | s | RESISTOR,CHIP 33 1/10W (1608) |
| R263 | 1-216-803-11 | s | RESISTOR,CHIP 33 1/10W (1608) |
| R264 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R265 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R266 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R273 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R274 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R275 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R276 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R277 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R278 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R279 | 1-218-953-11 | s | RESISTOR, CHIP 1K 1/16W |
| R280 | 1-218-953-11 | s | RESISTOR, CHIP 1K 1/16W |
| R281 | 1-218-953-11 | s | RESISTOR, CHIP 1K 1/16W |
| R282 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |

(DPR-265 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R283 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R284 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R285 | 1-218-957-11 | s | RESISTOR,CHIP 2.2K 1/16W(1005) |
| R286 | 1-218-957-11 | s | RESISTOR,CHIP 2.2K 1/16W(1005) |
| R287 | 1-218-957-11 | s | RESISTOR,CHIP 2.2K 1/16W(1005) |
| R288 | 1-218-965-11 | s | RESISTOR, CHIP 10K 1/16W |
| R289 | 1-218-965-11 | s | RESISTOR, CHIP 10K 1/16W |
| R290 | 1-218-965-11 | s | RESISTOR, CHIP 10K 1/16W |
| R291 | 1-218-965-11 | s | RESISTOR, CHIP 10K 1/16W |
| R292 | 1-218-965-11 | s | RESISTOR, CHIP 10K 1/16W |
| R293 | 1-218-965-11 | s | RESISTOR, CHIP 10K 1/16W |
| R294 | 1-218-965-11 | s | RESISTOR, CHIP 10K 1/16W |
| R295 | 1-218-965-11 | s | RESISTOR, CHIP 10K 1/16W |
| R296 | 1-218-965-11 | s | RESISTOR, CHIP 10K 1/16W |
| R297 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R298 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R299 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R300 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R301 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R302 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R309 | 1-218-965-11 | s | RESISTOR, CHIP 10K 1/16W |
| R310 | 1-218-965-11 | s | RESISTOR, CHIP 10K 1/16W |
| R311 | 1-218-965-11 | s | RESISTOR, CHIP 10K 1/16W |
| R312 | 1-208-679-11 | s | RESISTOR CHIP 680 1/16W (1005) |
| R313 | 1-208-679-11 | s | RESISTOR CHIP 680 1/16W (1005) |
| R314 | 1-208-679-11 | s | RESISTOR CHIP 680 1/16W (1005) |
| R315 | 1-208-679-11 | s | RESISTOR CHIP 680 1/16W (1005) |
| R316 | 1-208-679-11 | s | RESISTOR CHIP 680 1/16W (1005) |
| R317 | 1-208-679-11 | s | RESISTOR CHIP 680 1/16W (1005) |
| R318 | 1-218-937-11 | s | RESISTOR, CHIP 47 |
| R319 | 1-218-937-11 | s | RESISTOR, CHIP 47 |
| R320 | 1-218-937-11 | s | RESISTOR, CHIP 47 |
| R321 | 1-218-969-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R322 | 1-218-969-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R323 | 1-218-969-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R324 | 1-218-973-11 | s | RESISTOR,CHIP 47K 1/16W (1005) |
| R325 | 1-218-973-11 | s | RESISTOR,CHIP 47K 1/16W (1005) |
| R326 | 1-218-973-11 | s | RESISTOR,CHIP 47K 1/16W (1005) |
| R327 | 1-208-691-11 | s | RESISTOR CHIP 2.2K 1/16W(1005) |
| R328 | 1-208-691-11 | s | RESISTOR CHIP 2.2K 1/16W(1005) |
| R329 | 1-208-691-11 | s | RESISTOR CHIP 2.2K 1/16W(1005) |
| R330 | 1-208-885-11 | s | RESISTOR, CHIP 820 1/16W(1005) |
| R331 | 1-218-977-11 | s | RESISTOR,CHIP 100K 1/16W(1005) |
| R332 | 1-208-885-11 | s | RESISTOR, CHIP 820 1/16W(1005) |
| R333 | 1-218-977-11 | s | RESISTOR,CHIP 100K 1/16W(1005) |
| R334 | 1-208-885-11 | s | RESISTOR, CHIP 820 1/16W(1005) |
| R335 | 1-218-977-11 | s | RESISTOR,CHIP 100K 1/16W(1005) |
| R336 | 1-208-671-11 | s | RESISTOR CHIP 330 1/16W (1005) |
| R337 | 1-208-671-11 | s | RESISTOR CHIP 330 1/16W (1005) |
| R338 | 1-208-671-11 | s | RESISTOR CHIP 330 1/16W (1005) |
| R342 | 1-218-961-11 | s | RESISTOR, CHIP 4.7K 1/16W |
| R343 | 1-218-961-11 | s | RESISTOR, CHIP 4.7K 1/16W |
| R344 | 1-218-961-11 | s | RESISTOR, CHIP 4.7K 1/16W |
| R345 | 1-208-679-11 | s | RESISTOR CHIP 680 1/16W (1005) |
| R346 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R347 | 1-208-679-11 | s | RESISTOR CHIP 680 1/16W (1005) |
| R348 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R349 | 1-208-679-11 | s | RESISTOR CHIP 680 1/16W (1005) |
| R350 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |

(DPR-265 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R351 | 1-208-675-11 | s | RESISTOR CHIP 470 1/16W (1005) |
| R352 | 1-208-675-11 | s | RESISTOR CHIP 470 1/16W (1005) |
| R353 | 1-208-675-11 | s | RESISTOR CHIP 470 1/16W (1005) |
| R354 | 1-208-675-11 | s | RESISTOR CHIP 470 1/16W (1005) |
| R355 | 1-208-675-11 | s | RESISTOR CHIP 470 1/16W (1005) |
| R356 | 1-208-675-11 | s | RESISTOR CHIP 470 1/16W (1005) |
| R357 | 1-208-671-11 | s | RESISTOR CHIP 330 1/16W (1005) |
| R358 | 1-208-671-11 | s | RESISTOR CHIP 330 1/16W (1005) |
| R359 | 1-208-671-11 | s | RESISTOR CHIP 330 1/16W (1005) |
| R360 | 1-208-671-11 | s | RESISTOR CHIP 330 1/16W (1005) |
| R361 | 1-208-671-11 | s | RESISTOR CHIP 330 1/16W (1005) |
| R362 | 1-208-671-11 | s | RESISTOR CHIP 330 1/16W (1005) |
| R363 | 1-218-953-11 | s | RESISTOR, CHIP 1K 1/16W |
| R364 | 1-218-953-11 | s | RESISTOR, CHIP 1K 1/16W |
| R365 | 1-218-953-11 | s | RESISTOR, CHIP 1K 1/16W |
| R366 | 1-216-803-11 | s | RESISTOR,CHIP 33 1/10W (1608) |
| R367 | 1-216-803-11 | s | RESISTOR,CHIP 33 1/10W (1608) |
| R368 | 1-216-803-11 | s | RESISTOR,CHIP 33 1/10W (1608) |
| R369 | 1-216-803-11 | s | RESISTOR,CHIP 33 1/10W (1608) |
| R370 | 1-216-803-11 | s | RESISTOR,CHIP 33 1/10W (1608) |
| R371 | 1-216-803-11 | s | RESISTOR,CHIP 33 1/10W (1608) |
| R372 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R373 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R374 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R381 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R382 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R383 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R384 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R385 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R386 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R387 | 1-218-965-11 | s | RESISTOR, CHIP 10K 1/16W |
| R388 | 1-218-965-11 | s | RESISTOR, CHIP 10K 1/16W |
| R389 | 1-218-965-11 | s | RESISTOR, CHIP 10K 1/16W |
| R390 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R391 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R392 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R393 | 1-218-957-11 | s | RESISTOR,CHIP 2.2K 1/16W(1005) |
| R394 | 1-218-957-11 | s | RESISTOR,CHIP 2.2K 1/16W(1005) |
| R395 | 1-218-957-11 | s | RESISTOR,CHIP 2.2K 1/16W(1005) |
| R396 | 1-218-965-11 | s | RESISTOR, CHIP 10K 1/16W |
| R397 | 1-218-965-11 | s | RESISTOR, CHIP 10K 1/16W |
| R398 | 1-218-965-11 | s | RESISTOR, CHIP 10K 1/16W |
| R399 | 1-218-973-11 | s | RESISTOR,CHIP 47K 1/16W (1005) |
| R400 | 1-218-973-11 | s | RESISTOR,CHIP 47K 1/16W (1005) |
| R401 | 1-208-931-11 | s | RESISTOR, CHIP 68K (1005) |
| R402 | 1-208-931-11 | s | RESISTOR, CHIP 68K (1005) |
| R403 | 1-208-931-11 | s | RESISTOR, CHIP 68K (1005) |
| R404 | 1-218-973-11 | s | RESISTOR,CHIP 47K 1/16W (1005) |
| R405 | 1-208-931-11 | s | RESISTOR, CHIP 68K (1005) |
| R406 | 1-218-965-11 | s | RESISTOR, CHIP 10K 1/16W |
| R407 | 1-218-965-11 | s | RESISTOR, CHIP 10K 1/16W |
| R408 | 1-218-965-11 | s | RESISTOR, CHIP 10K 1/16W |
| R409 | 1-218-965-11 | s | RESISTOR, CHIP 10K 1/16W |
| R410 | 1-218-965-11 | s | RESISTOR, CHIP 10K 1/16W |
| R411 | 1-218-965-11 | s | RESISTOR, CHIP 10K 1/16W |
| R412 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R413 | 1-218-965-11 | s | RESISTOR, CHIP 10K 1/16W |
| R414 | 1-218-965-11 | s | RESISTOR, CHIP 10K 1/16W |
| R415 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |

(DPR-265 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R416 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R417 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R418 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R419 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R432 | 1-208-905-11 | s | RESISTOR, CHIP 5.6K (1005) |
| R433 | 1-208-905-11 | s | RESISTOR, CHIP 5.6K (1005) |
| R434 | 1-208-905-11 | s | RESISTOR, CHIP 5.6K (1005) |
| R435 | 1-208-905-11 | s | RESISTOR, CHIP 5.6K (1005) |
| R436 | 1-208-905-11 | s | RESISTOR, CHIP 5.6K (1005) |
| R437 | 1-208-905-11 | s | RESISTOR, CHIP 5.6K (1005) |
| R451 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R452 | 1-218-937-11 | s | RESISTOR, CHIP 47 |
| R453 | 1-218-937-11 | s | RESISTOR, CHIP 47 |
| R454 | 1-218-937-11 | s | RESISTOR, CHIP 47 |
| R456 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R457 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R458 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R459 | 1-218-937-11 | s | RESISTOR, CHIP 47 |
| R460 | 1-218-937-11 | s | RESISTOR, CHIP 47 |
| R461 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R462 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R463 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R464 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R465 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R466 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R467 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R468 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R469 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R470 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R471 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R472 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R473 | 1-218-953-11 | s | RESISTOR, CHIP 1K 1/16W |
| R474 | *2 1-218-953-81 | s | RES-CHIP 1K 5% 1/16W |
| | *4 1-218-973-81 | s | RES-CHIP 47K 5% 1/16W |
| R475 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R476 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R478 | *4 1-218-973-81 | s | RES-CHIP 47K 5% 1/16W |
| R479 | *4 1-218-973-81 | s | RES-CHIP 47K 5% 1/16W |
| R480 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R481 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R482 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R501 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R502 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R503 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R504 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R505 | 1-218-957-11 | s | RESISTOR,CHIP 2.2K 1/16W(1005) |
| R506 | 1-218-957-11 | s | RESISTOR,CHIP 2.2K 1/16W(1005) |
| R507 | 1-218-957-11 | s | RESISTOR,CHIP 2.2K 1/16W(1005) |
| R508 | 1-218-957-11 | s | RESISTOR,CHIP 2.2K 1/16W(1005) |
| R510 | 1-218-973-11 | s | RESISTOR,CHIP 47K 1/16W (1005) |
| R511 | 1-218-965-11 | s | RESISTOR, CHIP 10K 1/16W |
| R512 | 1-218-965-11 | s | RESISTOR, CHIP 10K 1/16W |
| R513 | 1-218-957-11 | s | RESISTOR,CHIP 2.2K 1/16W(1005) |
| R514 | 1-218-957-11 | s | RESISTOR,CHIP 2.2K 1/16W(1005) |
| R515 | 1-218-977-11 | s | RESISTOR,CHIP 100K 1/16W(1005) |
| R516 | 1-218-973-11 | s | RESISTOR,CHIP 47K 1/16W (1005) |
| R517 | 1-218-973-11 | s | RESISTOR,CHIP 47K 1/16W (1005) |
| R518 | 1-218-973-11 | s | RESISTOR,CHIP 47K 1/16W (1005) |
| R519 | 1-218-953-11 | s | RESISTOR, CHIP 1K 1/16W |

(DPR-265 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R520 | 1-218-973-11 | s | RESISTOR,CHIP 47K 1/16W (1005) |
| R521 | 1-218-957-11 | s | RESISTOR,CHIP 2.2K 1/16W(1005) |
| R522 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R523 | 1-218-965-11 | s | RESISTOR, CHIP 10K 1/16W |
| R524 | 1-218-965-11 | s | RESISTOR, CHIP 10K 1/16W |
| R525 | 1-218-977-11 | s | RESISTOR,CHIP 100K 1/16W(1005) |
| R526 | 1-218-973-11 | s | RESISTOR,CHIP 47K 1/16W (1005) |
| R527 | 1-218-965-11 | s | RESISTOR, CHIP 10K 1/16W |
| R528 | 1-218-953-11 | s | RESISTOR, CHIP 1K 1/16W |
| R529 | 1-218-961-11 | s | RESISTOR, CHIP 4.7K 1/16W |
| R530 | 1-218-957-11 | s | RESISTOR,CHIP 2.2K 1/16W(1005) |
| R531 | 1-218-965-11 | s | RESISTOR, CHIP 10K 1/16W |
| R532 | 1-218-965-11 | s | RESISTOR, CHIP 10K 1/16W |
| R533 | 1-218-965-11 | s | RESISTOR, CHIP 10K 1/16W |
| R534 | 1-218-977-11 | s | RESISTOR,CHIP 100K 1/16W(1005) |
| R535 | 1-208-933-11 | s | RESISTOR CHIP 82K |
| R536 | 1-218-937-11 | s | RESISTOR, CHIP 47 |
| R537 | 1-218-965-11 | s | RESISTOR, CHIP 10K 1/16W |
| R538 | 1-218-929-11 | s | RESISTOR,CHIP 10 1/16W (1005) |
| R539 | 1-218-965-11 | s | RESISTOR, CHIP 10K 1/16W |
| R540 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R541 | 1-218-929-11 | s | RESISTOR,CHIP 10 1/16W (1005) |
| R542 | 1-218-965-11 | s | RESISTOR, CHIP 10K 1/16W |
| R543 | 1-218-929-11 | s | RESISTOR,CHIP 10 1/16W (1005) |
| R544 | 1-218-969-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R545 | 1-218-929-11 | s | RESISTOR,CHIP 10 1/16W (1005) |
| R546 | 1-218-989-11 | s | RESISTOR,CHIP 1M 1/16W (1005) |
| R547 | 1-218-953-11 | s | RESISTOR, CHIP 1K 1/16W |
| R548 | 1-218-965-11 | s | RESISTOR, CHIP 10K 1/16W |
| R549 | 1-218-965-11 | s | RESISTOR, CHIP 10K 1/16W |
| R550 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R551 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R552 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R553 | 1-218-965-11 | s | RESISTOR, CHIP 10K 1/16W |
| R554 | 1-218-965-11 | s | RESISTOR, CHIP 10K 1/16W |
| R555 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R556 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R557 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R558 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R559 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R560 | 1-218-929-11 | s | RESISTOR,CHIP 10 1/16W (1005) |
| R561 | 1-218-929-11 | s | RESISTOR,CHIP 10 1/16W (1005) |
| R562 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R563 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R564 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R565 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R567 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R568 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R571 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R572 | 1-218-957-11 | s | RESISTOR,CHIP 2.2K 1/16W(1005) |
| R573 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R574 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R575 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R576 | 1-218-957-11 | s | RESISTOR,CHIP 2.2K 1/16W(1005) |
| R577 | 1-218-957-11 | s | RESISTOR,CHIP 2.2K 1/16W(1005) |
| R578 | 1-218-973-11 | s | RESISTOR,CHIP 47K 1/16W (1005) |
| R579 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R580 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R581 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |

(DPR-265 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R582 | 1-218-965-11 | s | RESISTOR, CHIP 10K 1/16W |
| R583 | 1-218-965-11 | s | RESISTOR, CHIP 10K 1/16W |
| R584 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R585 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R602 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R603 | 1-208-711-11 | s | RESISTOR CHIP 15K 1/16W (1005) |
| R604 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R605 | 1-218-973-11 | s | RESISTOR,CHIP 47K 1/16W (1005) |
| R606 | 1-218-937-11 | s | RESISTOR, CHIP 47 |
| R607 | 1-218-953-11 | s | RESISTOR, CHIP 1K 1/16W |
| R608 | 1-218-953-11 | s | RESISTOR, CHIP 1K 1/16W |
| R609 | 1-218-965-11 | s | RESISTOR, CHIP 10K 1/16W |
| R610 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R611 | 1-218-973-11 | s | RESISTOR,CHIP 47K 1/16W (1005) |
| R612 | 1-218-973-11 | s | RESISTOR,CHIP 47K 1/16W (1005) |
| R613 | 1-218-973-11 | s | RESISTOR,CHIP 47K 1/16W (1005) |
| R614 | 1-218-953-11 | s | RESISTOR, CHIP 1K 1/16W |
| R615 | 1-218-953-11 | s | RESISTOR, CHIP 1K 1/16W |
| R616 | 1-218-953-11 | s | RESISTOR, CHIP 1K 1/16W |
| R618 | 1-208-873-11 | s | RESISTOR,CHIP 270 1/16W (1005) |
| R619 | 1-218-973-11 | s | RESISTOR,CHIP 47K 1/16W (1005) |
| R620 | 1-218-953-11 | s | RESISTOR, CHIP 1K 1/16W |
| R621 | 1-218-953-11 | s | RESISTOR, CHIP 1K 1/16W |
| R622 | 1-218-953-11 | s | RESISTOR, CHIP 1K 1/16W |
| R623 | 1-218-953-11 | s | RESISTOR, CHIP 1K 1/16W |
| R624 | 1-218-953-11 | s | RESISTOR, CHIP 1K 1/16W |
| R625 | 1-218-953-11 | s | RESISTOR, CHIP 1K 1/16W |
| R626 | 1-218-953-11 | s | RESISTOR, CHIP 1K 1/16W |
| R627 | 1-218-953-11 | s | RESISTOR, CHIP 1K 1/16W |
| R628 | 1-218-973-11 | s | RESISTOR,CHIP 47K 1/16W (1005) |
| R629 | 1-218-973-11 | s | RESISTOR,CHIP 47K 1/16W (1005) |
| R630 | 1-211-990-11 | s | RESISTOR,CHIP 75 1/10W (1608) |
| R631 | 1-211-990-11 | s | RESISTOR,CHIP 75 1/10W (1608) |
| R632 | 1-211-990-11 | s | RESISTOR,CHIP 75 1/10W (1608) |
| R633 | 1-211-990-11 | s | RESISTOR,CHIP 75 1/10W (1608) |
| R634 | 1-208-687-11 | s | RESISTOR CHIP 1.5K 1/16W (1005 |
| R635 | 1-218-953-11 | s | RESISTOR, CHIP 1K 1/16W |
| R636 | 1-208-687-11 | s | RESISTOR CHIP 1.5K 1/16W (1005 |
| R637 | 1-218-973-11 | s | RESISTOR,CHIP 47K 1/16W (1005) |
| R638 | 1-218-953-11 | s | RESISTOR, CHIP 1K 1/16W |
| R639 | 1-218-973-11 | s | RESISTOR,CHIP 47K 1/16W (1005) |
| R640 | 1-218-973-11 | s | RESISTOR,CHIP 47K 1/16W (1005) |
| R641 | 1-218-965-11 | s | RESISTOR, CHIP 10K 1/16W |
| R642 | 1-211-990-11 | s | RESISTOR,CHIP 75 1/10W (1608) |
| R643 | 1-211-990-11 | s | RESISTOR,CHIP 75 1/10W (1608) |
| R644 | 1-218-969-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R645 | 1-218-823-11 | s | RESISTOR,CHIP 100 1/10W (1608) |
| R646 | 1-218-823-11 | s | RESISTOR,CHIP 100 1/10W (1608) |
| R647 | 1-218-957-11 | s | RESISTOR,CHIP 2.2K 1/16W(1005) |
| R648 | 1-218-957-11 | s | RESISTOR,CHIP 2.2K 1/16W(1005) |
| R649 | 1-218-957-11 | s | RESISTOR,CHIP 2.2K 1/16W(1005) |
| R650 | 1-218-973-11 | s | RESISTOR,CHIP 47K 1/16W (1005) |
| R651 | 1-211-990-11 | s | RESISTOR,CHIP 75 1/10W (1608) |
| R652 | 1-218-977-11 | s | RESISTOR,CHIP 100K 1/16W(1005) |
| R653 | 1-218-973-11 | s | RESISTOR,CHIP 47K 1/16W (1005) |
| R654 | 1-218-973-11 | s | RESISTOR,CHIP 47K 1/16W (1005) |
| R801 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R802 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R803 | *2 1-218-941-81 | s | RES-CHIP 100 5% 1/16W |

(DPR-265 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R804 | *2 1-218-941-81 | s | RES-CHIP 100 5% 1/16W |
| R805 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R806 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R807 | 1-218-957-11 | s | RESISTOR,CHIP 2.2K 1/16W(1005) |
| R808 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R810 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R811 | 1-218-957-11 | s | RESISTOR,CHIP 2.2K 1/16W(1005) |
| R812 | 1-218-937-11 | s | RESISTOR, CHIP 47 |
| R813 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R814 | 1-218-953-11 | s | RESISTOR, CHIP 1K 1/16W |
| R815 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R816 | 1-218-929-11 | s | RESISTOR,CHIP 10 1/16W (1005) |
| R817 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R818 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R819 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R820 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R821 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R822 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R823 | 1-218-965-11 | s | RESISTOR, CHIP 10K 1/16W |
| R824 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R825 | *3 1-218-941-81 | s | RES-CHIP 100 5% 1/16W |
| R901 | 1-218-965-11 | s | RESISTOR, CHIP 10K 1/16W |
| R902 | 1-218-965-11 | s | RESISTOR, CHIP 10K 1/16W |
| R903 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R904 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R905 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R906 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R907 | 1-218-965-11 | s | RESISTOR, CHIP 10K 1/16W |
| R908 | 1-218-965-11 | s | RESISTOR, CHIP 10K 1/16W |
| R909 | 1-218-965-11 | s | RESISTOR, CHIP 10K 1/16W |
| R910 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R911 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R912 | 1-218-965-11 | s | RESISTOR, CHIP 10K 1/16W |
| R913 | 1-218-965-11 | s | RESISTOR, CHIP 10K 1/16W |
| R914 | 1-218-965-11 | s | RESISTOR, CHIP 10K 1/16W |
| R915 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R916 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R917 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R918 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R919 | 1-218-965-11 | s | RESISTOR, CHIP 10K 1/16W |
| R920 | 1-218-965-11 | s | RESISTOR, CHIP 10K 1/16W |
| R921 | 1-218-965-11 | s | RESISTOR, CHIP 10K 1/16W |
| R922 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R923 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R924 | 1-218-965-11 | s | RESISTOR, CHIP 10K 1/16W |
| R925 | 1-218-965-11 | s | RESISTOR, CHIP 10K 1/16W |
| R926 | 1-218-965-11 | s | RESISTOR, CHIP 10K 1/16W |
| R927 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R928 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R929 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R930 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R931 | 1-218-965-11 | s | RESISTOR, CHIP 10K 1/16W |
| R932 | 1-218-965-11 | s | RESISTOR, CHIP 10K 1/16W |
| R933 | 1-218-965-11 | s | RESISTOR, CHIP 10K 1/16W |
| R934 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R935 | 1-218-941-81 | s | RESISTOR,CHIP 100,1/16W (1005) |
| R936 | 1-218-965-11 | s | RESISTOR, CHIP 10K 1/16W |
| RB101 | 1-234-380-11 | s | RESISTOR,NETWORK 47KX4 (1005) |

(DPR-265 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| RB102 | 1-234-380-11 | s | RESISTOR,NETWORK 47KX4 (1005) |
| RB103 | 1-234-380-11 | s | RESISTOR,NETWORK 47KX4 (1005) |
| RB104 | 1-234-380-11 | s | RESISTOR,NETWORK 47KX4 (1005) |
| RB105 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB106 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB107 | 1-234-371-11 | s | RES, NETWORK 47X4 (1005) |
| RB108 | 1-234-371-11 | s | RES, NETWORK 47X4 (1005) |
| RB110 | 1-234-371-11 | s | RES, NETWORK 47X4 (1005) |
| RB111 | 1-234-371-11 | s | RES, NETWORK 47X4 (1005) |
| RB112 | 1-234-371-11 | s | RES, NETWORK 47X4 (1005) |
| RB113 | 1-234-371-11 | s | RES, NETWORK 47X4 (1005) |
| RB301 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB302 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB303 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB304 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB306 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB307 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB308 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB309 | 1-234-373-21 | s | RES, NETWORK 220X4 (1005) |
| RB310 | 1-234-373-21 | s | RES, NETWORK 220X4 (1005) |
| RB311 | 1-234-373-21 | s | RES, NETWORK 220X4 (1005) |
| RB312 | 1-234-373-21 | s | RES, NETWORK 220X4 (1005) |
| RB313 | 1-234-373-21 | s | RES, NETWORK 220X4 (1005) |
| RB314 | 1-234-373-21 | s | RES, NETWORK 220X4 (1005) |
| RB316 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB317 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB318 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB320 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB321 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB322 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB323 | 1-234-371-11 | s | RES, NETWORK 47X4 (1005) |
| RB324 | 1-234-371-11 | s | RES, NETWORK 47X4 (1005) |
| RB325 | 1-234-371-11 | s | RES, NETWORK 47X4 (1005) |
| RB326 | 1-234-371-11 | s | RES, NETWORK 47X4 (1005) |
| RB327 | 1-234-371-11 | s | RES, NETWORK 47X4 (1005) |
| RB328 | 1-234-371-11 | s | RES, NETWORK 47X4 (1005) |
| RB329 | 1-234-373-21 | s | RES, NETWORK 220X4 (1005) |
| RB330 | 1-234-373-21 | s | RES, NETWORK 220X4 (1005) |
| RB331 | 1-234-373-21 | s | RES, NETWORK 220X4 (1005) |
| RB332 | 1-234-373-21 | s | RES, NETWORK 220X4 (1005) |
| RB333 | 1-234-373-21 | s | RES, NETWORK 220X4 (1005) |
| RB334 | 1-234-373-21 | s | RES, NETWORK 220X4 (1005) |
| RB336 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB337 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB338 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB340 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB341 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB342 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB343 | 1-234-371-11 | s | RES, NETWORK 47X4 (1005) |
| RB344 | 1-234-371-11 | s | RES, NETWORK 47X4 (1005) |
| RB345 | 1-234-371-11 | s | RES, NETWORK 47X4 (1005) |
| RB346 | 1-234-371-11 | s | RES, NETWORK 47X4 (1005) |
| RB347 | 1-234-371-11 | s | RES, NETWORK 47X4 (1005) |
| RB348 | 1-234-371-11 | s | RES, NETWORK 47X4 (1005) |
| RB349 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB350 | 1-234-380-11 | s | RESISTOR,NETWORK 47KX4 (1005) |
| RB351 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB352 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB353 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |

(DPR-265 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| RB354 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB355 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB356 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB357 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB358 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB359 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB360 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB361 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB362 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB363 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB364 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB365 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB366 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB367 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB368 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB369 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB370 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB371 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB372 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB373 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB374 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB375 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB376 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB377 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB378 | 1-234-371-11 | s | RES, NETWORK 47X4 (1005) |
| RB379 | 1-234-371-11 | s | RES, NETWORK 47X4 (1005) |
| RB402 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB403 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB404 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB405 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB406 | 1-234-371-11 | s | RES, NETWORK 47X4 (1005) |
| RB407 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB408 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB409 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB410 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB411 | 1-234-371-11 | s | RES, NETWORK 47X4 (1005) |
| RB412 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB413 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB414 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB415 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB416 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB417 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB418 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB419 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB420 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB421 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB422 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB423 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB424 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB425 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB426 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB427 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB501 | 1-234-371-11 | s | RES, NETWORK 47X4 (1005) |
| RB502 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB503 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB504 | 1-234-378-11 | s | RES, NETWORK 10KX4 (1005) |
| RB505 | 1-234-369-21 | s | RES, NETWORK 10X4 (1005) |
| RB506 | 1-234-369-21 | s | RES, NETWORK 10X4 (1005) |
| RB601 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |

(DPR-265 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| RB602 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB603 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB604 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB605 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB606 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB801 | 1-234-373-21 | s | RES, NETWORK 220X4 (1005) |
| RB802 | 1-234-373-21 | s | RES, NETWORK 220X4 (1005) |
| RB803 | 1-234-373-21 | s | RES, NETWORK 220X4 (1005) |
| RB804 | 1-234-373-21 | s | RES, NETWORK 220X4 (1005) |
| RB805 | 1-234-373-21 | s | RES, NETWORK 220X4 (1005) |
| RB806 | 1-234-373-21 | s | RES, NETWORK 220X4 (1005) |
| RB807 | 1-234-373-21 | s | RES, NETWORK 220X4 (1005) |
| RB809 | 1-234-373-21 | s | RES, NETWORK 220X4 (1005) |
| RB810 | 1-234-373-21 | s | RES, NETWORK 220X4 (1005) |
| RB811 | 1-234-373-21 | s | RES, NETWORK 220X4 (1005) |
| RB813 | 1-234-373-21 | s | RES, NETWORK 220X4 (1005) |
| RB814 | 1-234-373-21 | s | RES, NETWORK 220X4 (1005) |
| RB815 | 1-234-373-21 | s | RES, NETWORK 220X4 (1005) |
| RB816 | 1-234-373-21 | s | RES, NETWORK 220X4 (1005) |
| RB817 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB818 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB819 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB820 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB821 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB822 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB823 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB824 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB825 | 1-234-373-21 | s | RES, NETWORK 220X4 (1005) |
| RB826 | 1-234-373-21 | s | RES, NETWORK 220X4 (1005) |
| RB827 | 1-234-373-21 | s | RES, NETWORK 220X4 (1005) |
| RB828 | 1-234-373-21 | s | RES, NETWORK 220X4 (1005) |
| RB829 | 1-234-373-21 | s | RES, NETWORK 220X4 (1005) |
| RB830 | 1-234-373-21 | s | RES, NETWORK 220X4 (1005) |
| RB831 | 1-234-373-21 | s | RES, NETWORK 220X4 (1005) |
| RB832 | 1-234-373-21 | s | RES, NETWORK 220X4 (1005) |
| RB833 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB834 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB835 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB836 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB837 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB838 | 1-234-373-21 | s | RES, NETWORK 220X4 (1005) |
| RB839 | 1-234-373-21 | s | RES, NETWORK 220X4 (1005) |
| RB840 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB901 | 1-234-371-11 | s | RES, NETWORK 47X4 (1005) |
| RB902 | 1-234-371-11 | s | RES, NETWORK 47X4 (1005) |
| RB903 | 1-234-371-11 | s | RES, NETWORK 47X4 (1005) |
| RB904 | 1-234-371-11 | s | RES, NETWORK 47X4 (1005) |
| RB905 | 1-234-371-11 | s | RES, NETWORK 47X4 (1005) |
| RB906 | 1-234-371-11 | s | RES, NETWORK 47X4 (1005) |
| RB907 | 1-234-371-11 | s | RES, NETWORK 47X4 (1005) |
| RB908 | 1-234-371-11 | s | RES, NETWORK 47X4 (1005) |
| RB909 | 1-234-371-11 | s | RES, NETWORK 47X4 (1005) |
| RB910 | 1-234-371-11 | s | RES, NETWORK 47X4 (1005) |
| RB911 | 1-234-371-11 | s | RES, NETWORK 47X4 (1005) |
| RB912 | 1-234-371-11 | s | RES, NETWORK 47X4 (1005) |
| RB913 | 1-234-371-11 | s | RES, NETWORK 47X4 (1005) |
| RB914 | 1-234-371-11 | s | RES, NETWORK 47X4 (1005) |
| RB915 | 1-234-371-11 | s | RES, NETWORK 47X4 (1005) |
| RB916 | 1-234-371-11 | s | RES, NETWORK 47X4 (1005) |

(DPR-265 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description | |
|---|---|---|---|---|
| RB917 | 1-234-371-11 | s | RES, NETWORK 47X4 | (1005) |
| RB918 | 1-234-371-11 | s | RES, NETWORK 47X4 | (1005) |
| RB919 | 1-234-371-11 | s | RES, NETWORK 47X4 | (1005) |
| RB920 | 1-234-371-11 | s | RES, NETWORK 47X4 | (1005) |
| RB921 | 1-234-371-11 | s | RES, NETWORK 47X4 | (1005) |
| RB922 | 1-234-371-11 | s | RES, NETWORK 47X4 | (1005) |
| RB923 | 1-234-371-11 | s | RES, NETWORK 47X4 | (1005) |
| RB924 | 1-234-371-11 | s | RES, NETWORK 47X4 | (1005) |
| RB925 | 1-234-371-11 | s | RES, NETWORK 47X4 | (1005) |
| RB926 | 1-234-371-11 | s | RES, NETWORK 47X4 | (1005) |
| RB927 | 1-234-371-11 | s | RES, NETWORK 47X4 | (1005) |
| RB928 | 1-234-371-11 | s | RES, NETWORK 47X4 | (1005) |
| RB929 | 1-234-371-11 | s | RES, NETWORK 47X4 | (1005) |
| RB930 | 1-234-371-11 | s | RES, NETWORK 47X4 | (1005) |
| RB931 | 1-234-371-11 | s | RES, NETWORK 47X4 | (1005) |
| RB932 | 1-234-371-11 | s | RES, NETWORK 47X4 | (1005) |
| RB933 | 1-234-371-11 | s | RES, NETWORK 47X4 | (1005) |
| RB934 | 1-234-371-11 | s | RES, NETWORK 47X4 | (1005) |
| RB935 | 1-234-371-11 | s | RES, NETWORK 47X4 | (1005) |
| RB936 | 1-234-371-11 | s | RES, NETWORK 47X4 | (1005) |
| RB937 | 1-234-371-11 | s | RES, NETWORK 47X4 | (1005) |
| RB938 | 1-234-371-11 | s | RES, NETWORK 47X4 | (1005) |
| RB939 | 1-234-371-11 | s | RES, NETWORK 47X4 | (1005) |
| RB940 | 1-234-371-11 | s | RES, NETWORK 47X4 | (1005) |
| RB941 | 1-234-371-11 | s | RES, NETWORK 47X4 | (1005) |
| RB942 | 1-234-371-11 | s | RES, NETWORK 47X4 | (1005) |
| RB943 | 1-234-371-11 | s | RES, NETWORK 47X4 | (1005) |
| RB944 | 1-234-371-11 | s | RES, NETWORK 47X4 | (1005) |
| RB945 | 1-234-371-11 | s | RES, NETWORK 47X4 | (1005) |
| RB946 | 1-234-371-11 | s | RES, NETWORK 47X4 | (1005) |
| RB947 | 1-234-371-11 | s | RES, NETWORK 47X4 | (1005) |
| RB948 | 1-234-371-11 | s | RES, NETWORK 47X4 | (1005) |
| RB949 | 1-234-371-11 | s | RES, NETWORK 47X4 | (1005) |
| RB950 | 1-234-371-11 | s | RES, NETWORK 47X4 | (1005) |
| RB951 | 1-234-371-11 | s | RES, NETWORK 47X4 | (1005) |
| RB952 | 1-234-371-11 | s | RES, NETWORK 47X4 | (1005) |
| RB953 | 1-234-371-11 | s | RES, NETWORK 47X4 | (1005) |
| RB954 | 1-234-371-11 | s | RES, NETWORK 47X4 | (1005) |
| RB955 | 1-234-371-11 | s | RES, NETWORK 47X4 | (1005) |
| RB956 | 1-234-371-11 | s | RES, NETWORK 47X4 | (1005) |
| RB957 | 1-234-371-11 | s | RES, NETWORK 47X4 | (1005) |
| RB958 | 1-234-371-11 | s | RES, NETWORK 47X4 | (1005) |
| RB959 | 1-234-371-11 | s | RES, NETWORK 47X4 | (1005) |
| RB960 | 1-234-371-11 | s | RES, NETWORK 47X4 | (1005) |
| RB961 | 1-234-371-11 | s | RES, NETWORK 47X4 | (1005) |
| RB962 | 1-234-371-11 | s | RES, NETWORK 47X4 | (1005) |
| RB963 | 1-234-371-11 | s | RES, NETWORK 47X4 | (1005) |
| RB964 | 1-234-371-11 | s | RES, NETWORK 47X4 | (1005) |
| RB965 | 1-234-371-11 | s | RES, NETWORK 47X4 | (1005) |
| RB966 | 1-234-371-11 | s | RES, NETWORK 47X4 | (1005) |
| RB967 | 1-234-371-11 | s | RES, NETWORK 47X4 | (1005) |
| RB968 | 1-234-371-11 | s | RES, NETWORK 47X4 | (1005) |
| RB969 | 1-234-371-11 | s | RES, NETWORK 47X4 | (1005) |
| RB970 | 1-234-371-11 | s | RES, NETWORK 47X4 | (1005) |
| RB971 | 1-234-371-11 | s | RES, NETWORK 47X4 | (1005) |
| RB972 | 1-234-371-11 | s | RES, NETWORK 47X4 | (1005) |
| RB973 | 1-234-371-11 | s | RES, NETWORK 47X4 | (1005) |
| RB974 | 1-234-371-11 | s | RES, NETWORK 47X4 | (1005) |
| RB975 | 1-234-371-11 | s | RES, NETWORK 47X4 | (1005) |

(DPR-265 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description | |
|---|---|---|---|---|
| RB976 | 1-234-371-11 | s | RES, NETWORK 47X4 | (1005) |
| RB977 | 1-234-371-11 | s | RES, NETWORK 47X4 | (1005) |
| RB978 | 1-234-371-11 | s | RES, NETWORK 47X4 | (1005) |
| RB979 | 1-234-371-11 | s | RES, NETWORK 47X4 | (1005) |
| RB980 | 1-234-371-11 | s | RES, NETWORK 47X4 | (1005) |
| RB981 | 1-234-371-11 | s | RES, NETWORK 47X4 | (1005) |
| RB982 | 1-234-371-11 | s | RES, NETWORK 47X4 | (1005) |
| RB983 | 1-234-371-11 | s | RES, NETWORK 47X4 | (1005) |
| RB984 | 1-234-371-11 | s | RES, NETWORK 47X4 | (1005) |
| RB985 | 1-234-371-11 | s | RES, NETWORK 47X4 | (1005) |
| RB986 | 1-234-371-11 | s | RES, NETWORK 47X4 | (1005) |
| RB987 | 1-234-371-11 | s | RES, NETWORK 47X4 | (1005) |
| RB988 | 1-234-371-11 | s | RES, NETWORK 47X4 | (1005) |
| RB989 | 1-234-371-11 | s | RES, NETWORK 47X4 | (1005) |
| RB990 | 1-234-371-11 | s | RES, NETWORK 47X4 | (1005) |
| RB991 | 1-234-371-11 | s | RES, NETWORK 47X4 | (1005) |
| RB992 | 1-234-371-11 | s | RES, NETWORK 47X4 | (1005) |
| RB993 | 1-234-371-11 | s | RES, NETWORK 47X4 | (1005) |
| RB994 | 1-234-371-11 | s | RES, NETWORK 47X4 | (1005) |
| RB995 | 1-234-371-11 | s | RES, NETWORK 47X4 | (1005) |
| RB996 | 1-234-371-11 | s | RES, NETWORK 47X4 | (1005) |
| RB997 | 1-234-371-11 | s | RES, NETWORK 47X4 | (1005) |
| RB998 | 1-234-371-11 | s | RES, NETWORK 47X4 | (1005) |
| RB999 | 1-234-371-11 | s | RES, NETWORK 47X4 | (1005) |
| S13 | 1-771-709-31 | s | SWITCH, SLIDE | |
| THP101 ⚠ | 1-804-616-11 | s | THERMISTOR, POSITIVE | |
| THP102 ⚠ | 1-804-616-11 | s | THERMISTOR, POSITIVE | |
| THP103 ⚠ | 1-804-616-11 | s | THERMISTOR, POSITIVE | |
| THP104 ⚠ | 1-804-616-11 | s | THERMISTOR, POSITIVE | |
| THP105 ⚠ | 1-804-458-21 | s | THERMISTOR, POSITIVE | |
| THP106 ⚠ | 1-804-616-11 | s | THERMISTOR, POSITIVE | |
| TP1 | 1-535-877-22 | s | CHIP,CHECKER (TEST POINT) | |
| TP2 | 1-535-877-22 | s | CHIP,CHECKER (TEST POINT) | |
| TP3 | 1-535-877-22 | s | CHIP,CHECKER (TEST POINT) | |
| TP4 | 1-535-877-22 | s | CHIP,CHECKER (TEST POINT) | |
| TP501 | 1-535-877-22 | s | CHIP,CHECKER (TEST POINT) | |
| TP502 | 1-535-877-22 | s | CHIP,CHECKER (TEST POINT) | |
| X501 | 1-795-670-12 | s | OSCILLATOR, CRYSTAL | |
| X502 | 1-795-671-12 | s | OSCILLATOR, CRYSTAL | |
| X503 | 1-813-212-11 | s | OSCILLATOR, CRYSTAL | |
| X601 | 1-795-872-11 | s | OSCILLATOR | |

---
DPR-265C BOARD
---

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| 1pc | A-1179-310-A | s | MOUNTED CIRCUIT BOARD, DPR-265C |
| C11 | 1-115-419-91 | s | CAP,CHIP CERAMIC3300PF CH 2012 |
| C12 | 1-115-419-91 | s | CAP,CHIP CERAMIC3300PF CH 2012 |
| C57 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C58 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C59 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C60 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C61 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| C101 | 1-127-692-91 | s | CAP, CHIP CERAMIC 10MF B 3225 |
| C102 | 1-127-692-91 | s | CAP, CHIP CERAMIC 10MF B 3225 |
| C103 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| C104 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| C105 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| C106 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| C108 | 1-127-692-91 | s | CAP, CHIP CERAMIC 10MF B 3225 |
| C109 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| C110 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| C111 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| C113 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C114 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| C115 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| C117 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C119 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C121 | 1-119-923-81 | s | CAP, CERAMIC 0.047MF B 1005 |
| C122 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C123 | 1-119-923-81 | s | CAP, CERAMIC 0.047MF B 1005 |
| C124 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C125 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C126 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C127 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C128 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C129 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C130 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C132 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| C133 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| C134 | 1-164-937-81 | s | CAP, CHIPCERAMIC 1000PF B 1005 |
| C136 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C137 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C138 | 1-119-923-81 | s | CAP, CERAMIC 0.047MF B 1005 |
| C139 | 1-119-923-81 | s | CAP, CERAMIC 0.047MF B 1005 |
| C140 | 1-100-620-91 | s | CAP, CHIP CERAMIC 47MF B(3225) |
| C141 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| C142 | 1-100-620-91 | s | CAP, CHIP CERAMIC 47MF B(3225) |
| C143 | 1-100-620-91 | s | CAP, CHIP CERAMIC 47MF B(3225) |
| C144 | 1-100-620-91 | s | CAP, CHIP CERAMIC 47MF B(3225) |
| C145 | 1-107-819-81 | s | CAP,CHIP CERAMIC 22000PF B1005 |
| C146 | 1-164-936-81 | s | CAP, CHIP CERAMIC 680PF B 1005 |
| C147 | 1-100-620-91 | s | CAP, CHIP CERAMIC 47MF B(3225) |
| C148 | 1-107-819-81 | s | CAP,CHIP CERAMIC 22000PF B1005 |
| C149 | 1-164-936-81 | s | CAP, CHIP CERAMIC 680PF B 1005 |
| C150 | 1-100-620-91 | s | CAP, CHIP CERAMIC 47MF B(3225) |
| C151 | 1-100-620-91 | s | CAP, CHIP CERAMIC 47MF B(3225) |
| C152 | 1-100-620-91 | s | CAP, CHIP CERAMIC 47MF B(3225) |
| C153 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C154 | 1-100-620-91 | s | CAP, CHIP CERAMIC 47MF B(3225) |
| C155 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C156 | 1-100-620-91 | s | CAP, CHIP CERAMIC 47MF B(3225) |
| C157 | 1-100-620-91 | s | CAP, CHIP CERAMIC 47MF B(3225) |

(DPR-265C BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C158 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C159 | 1-100-620-91 | s | CAP, CHIP CERAMIC 47MF B(3225) |
| C160 | 1-100-620-91 | s | CAP, CHIP CERAMIC 47MF B(3225) |
| C161 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C162 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C163 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C164 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C165 | 1-100-620-91 | s | CAP, CHIP CERAMIC 47MF B(3225) |
| C166 | 1-100-620-91 | s | CAP, CHIP CERAMIC 47MF B(3225) |
| C167 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C168 | 1-164-850-81 | s | CAP, CHIP CERAMIC 10PF CH 1005 |
| C169 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C170 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C171 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C172 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C173 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C174 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C175 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C176 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C177 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C178 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C179 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C180 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C181 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C182 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C183 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C184 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C185 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C186 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C187 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C188 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C189 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C191 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| C192 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| C193 | 1-164-937-81 | s | CAP, CHIPCERAMIC 1000PF B 1005 |
| C194 | 1-100-620-91 | s | CAP, CHIP CERAMIC 47MF B(3225) |
| C195 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C196 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C197 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C198 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C199 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C200 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C201 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C202 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C203 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C204 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C205 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C206 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C207 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C208 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C209 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C210 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C211 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C212 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C213 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| C214 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| C215 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| C219 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C220 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |

(DPR-265C BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C221 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C222 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C223 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C224 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C225 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C226 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C227 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C228 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C229 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C230 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C231 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C232 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C233 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C234 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C235 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C236 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C237 | 1-164-858-81 | s | CAP, CHIP CERAMIC 22PF CH 1005 |
| C238 | 1-164-858-81 | s | CAP, CHIP CERAMIC 22PF CH 1005 |
| C239 | 1-164-858-81 | s | CAP, CHIP CERAMIC 22PF CH 1005 |
| C240 | 1-164-840-81 | s | CAP, CHIP CERAMIC 1PF CK 1005 |
| C241 | 1-164-840-81 | s | CAP, CHIP CERAMIC 1PF CK 1005 |
| C242 | 1-164-840-81 | s | CAP, CHIP CERAMIC 1PF CK 1005 |
| C243 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C244 | 1-164-840-81 | s | CAP, CHIP CERAMIC 1PF CK 1005 |
| C245 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C246 | 1-164-840-81 | s | CAP, CHIP CERAMIC 1PF CK 1005 |
| C247 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C248 | 1-164-840-81 | s | CAP, CHIP CERAMIC 1PF CK 1005 |
| C249 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C250 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C251 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C252 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C253 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C254 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C255 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C256 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C257 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C258 | 1-100-742-91 | s | CAP, CERAMIC 2.2MF C (1608) |
| C259 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C260 | 1-100-742-91 | s | CAP, CERAMIC 2.2MF C (1608) |
| C261 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C262 | 1-100-742-91 | s | CAP, CERAMIC 2.2MF C (1608) |
| C263 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C264 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C265 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C266 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C267 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C268 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C269 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C270 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C271 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C272 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C273 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C274 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C275 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C276 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C277 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C278 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C279 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |

(DPR-265C BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C280 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C281 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C282 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C283 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C284 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C285 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C286 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C287 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C288 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C289 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C290 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| C291 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| C292 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| C296 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C297 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C298 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C299 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C300 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C301 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C302 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C303 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C304 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C305 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C306 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C307 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C308 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C309 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C310 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C311 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C312 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C313 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C314 | 1-164-858-81 | s | CAP, CHIP CERAMIC 22PF CH 1005 |
| C315 | 1-164-858-81 | s | CAP, CHIP CERAMIC 22PF CH 1005 |
| C316 | 1-164-858-81 | s | CAP, CHIP CERAMIC 22PF CH 1005 |
| C317 | 1-164-840-81 | s | CAP, CHIP CERAMIC 1PF CK 1005 |
| C318 | 1-164-840-81 | s | CAP, CHIP CERAMIC 1PF CK 1005 |
| C319 | 1-164-840-81 | s | CAP, CHIP CERAMIC 1PF CK 1005 |
| C320 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C321 | 1-164-840-81 | s | CAP, CHIP CERAMIC 1PF CK 1005 |
| C322 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C323 | 1-164-840-81 | s | CAP, CHIP CERAMIC 1PF CK 1005 |
| C324 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C325 | 1-164-840-81 | s | CAP, CHIP CERAMIC 1PF CK 1005 |
| C326 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C327 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C328 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C329 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C330 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C331 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C332 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C333 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C334 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C335 | 1-100-742-91 | s | CAP, CERAMIC 2.2MF C (1608) |
| C336 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C337 | 1-100-742-91 | s | CAP, CERAMIC 2.2MF C (1608) |
| C338 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C339 | 1-100-742-91 | s | CAP, CERAMIC 2.2MF C (1608) |
| C340 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C341 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |

(DPR-265C BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C342 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C343 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C344 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C345 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C346 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C347 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C348 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C349 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C350 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C351 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C352 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C353 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C354 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C355 | 1-100-620-91 | s | CAP, CHIP CERAMIC 47MF B(3225) |
| C356 | 1-100-620-91 | s | CAP, CHIP CERAMIC 47MF B(3225) |
| C357 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C358 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C359 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C360 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C361 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C362 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C371 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| C372 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| C373 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| C374 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| C375 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| C376 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| C377 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C399 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| C401 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C402 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C403 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C404 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C405 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C406 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C407 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C408 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C409 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C410 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C411 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C412 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C413 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C414 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C415 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C416 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C417 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C418 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C419 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C420 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C421 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C422 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C423 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C424 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C425 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C426 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C427 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C428 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C429 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C430 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |

(DPR-265C BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C431 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C432 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C433 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C434 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C435 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C436 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C437 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C438 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C439 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C440 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C441 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C442 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C443 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C444 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C445 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C446 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C447 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C448 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C449 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C450 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C451 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C452 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C453 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C454 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C455 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C456 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C457 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C458 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C459 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C460 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C461 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C462 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C463 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C464 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C501 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C502 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C503 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C504 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C505 | 1-100-620-91 | s | CAP, CHIP CERAMIC 47MF B(3225) |
| C506 | 1-100-620-91 | s | CAP, CHIP CERAMIC 47MF B(3225) |
| C507 | 1-127-956-21 | s | CAP, CHIP FILM 0.1MF (3225) |
| C508 | 1-127-956-21 | s | CAP, CHIP FILM 0.1MF (3225) |
| C509 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C510 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C511 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C512 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C513 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C514 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C515 | 1-127-956-21 | s | CAP, CHIP FILM 0.1MF (3225) |
| C516 | 1-127-956-21 | s | CAP, CHIP FILM 0.1MF (3225) |
| C517 | 1-127-950-21 | s | CAP, CHIP FILM 0.01MF (2012) |
| C518 | 1-127-950-21 | s | CAP, CHIP FILM 0.01MF (2012) |
| C519 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C520 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C521 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C522 | 1-164-850-81 | s | CAP, CHIP CERAMIC 10PF CH 1005 |
| C523 | 1-164-850-81 | s | CAP, CHIP CERAMIC 10PF CH 1005 |
| C524 | 1-164-850-81 | s | CAP, CHIP CERAMIC 10PF CH 1005 |
| C525 | 1-164-850-81 | s | CAP, CHIP CERAMIC 10PF CH 1005 |

(DPR-265C BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C526 | 1-164-850-81 | s | CAP, CHIP CERAMIC 10PF CH 1005 |
| C527 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C528 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C529 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C530 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C531 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C532 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C533 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C534 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C535 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C538 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C542 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C543 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C544 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C545 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C546 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C547 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C548 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C602 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| C604 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C605 | 1-164-939-81 | s | CAP, CHIPCERAMIC 2200PF B 1005 |
| C606 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| C607 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| C608 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| C609 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| C610 | 1-127-760-91 | s | CAP, CHIP CERAMIC 4.7MF B 2012 |
| C611 | 1-127-760-91 | s | CAP, CHIP CERAMIC 4.7MF B 2012 |
| C612 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| C613 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C614 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| C615 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| C616 | 1-127-760-91 | s | CAP, CHIP CERAMIC 4.7MF B 2012 |
| C617 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| C618 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| C619 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| C620 | 1-127-760-91 | s | CAP, CHIP CERAMIC 4.7MF B 2012 |
| C621 | 1-127-760-91 | s | CAP, CHIP CERAMIC 4.7MF B 2012 |
| C622 | 1-127-760-91 | s | CAP, CHIP CERAMIC 4.7MF B 2012 |
| C623 | 1-127-760-91 | s | CAP, CHIP CERAMIC 4.7MF B 2012 |
| C624 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| C625 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C626 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| C627 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| C628 | 1-100-620-91 | s | CAP, CHIP CERAMIC 47MF B(3225) |
| C629 | 1-127-760-91 | s | CAP, CHIP CERAMIC 4.7MF B 2012 |
| C630 | 1-127-760-91 | s | CAP, CHIP CERAMIC 4.7MF B 2012 |
| C631 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C632 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C633 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| C634 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C701 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C702 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C703 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C704 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C705 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C706 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C707 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C708 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C709 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |

(DPR-265C BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C710 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C711 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C712 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C713 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C714 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C715 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C716 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C717 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C718 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C719 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C720 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C721 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C722 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C723 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C724 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C727 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C728 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C729 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C730 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C731 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C732 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C733 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C734 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C735 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C736 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C737 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C738 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C739 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C740 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C741 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C742 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C743 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C744 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C745 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C746 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C747 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C748 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C749 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C752 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C753 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C754 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C755 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C756 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C757 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C758 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C759 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C760 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C761 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C762 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C763 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C764 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C765 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C766 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C767 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C768 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C769 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C770 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C771 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C772 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |

(DPR-265C BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C773 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C774 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C775 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C776 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C777 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C778 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C788 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C789 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C790 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C791 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C792 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C793 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C794 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C795 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C796 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C797 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C798 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C799 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C800 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C801 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C802 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C803 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C804 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C805 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C806 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C807 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C808 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C809 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C810 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C820 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C821 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C822 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C823 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C824 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C825 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C826 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C827 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C828 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C829 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C830 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C831 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C832 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C833 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C834 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C835 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C836 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C837 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C838 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C839 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C840 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C841 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C842 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C843 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C844 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C845 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C846 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C847 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C848 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C849 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |

(DPR-265C BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C850 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C851 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C852 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C853 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C854 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C855 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C856 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C857 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C858 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C865 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C866 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C867 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C868 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C869 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C870 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C871 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C872 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C873 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C874 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C875 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C876 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C877 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C878 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C879 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C880 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C881 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C882 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C883 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C884 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C885 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C886 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C887 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C888 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C889 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C890 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C891 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C892 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C896 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C897 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| C900 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C901 | 1-107-819-81 | s | CAP,CHIP CERAMIC 22000PF B1005 |
| C902 | 1-107-819-81 | s | CAP,CHIP CERAMIC 22000PF B1005 |
| C903 | 1-107-819-81 | s | CAP,CHIP CERAMIC 22000PF B1005 |
| C904 | 1-107-819-81 | s | CAP,CHIP CERAMIC 22000PF B1005 |
| C905 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C906 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C907 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C908 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C909 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C910 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C911 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C912 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C913 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C914 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C915 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C916 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C917 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C918 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C919 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |

(DPR-265C BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C920 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C921 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C922 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C923 | 1-107-819-81 | s | CAP,CHIP CERAMIC 22000PF B1005 |
| C924 | 1-107-819-81 | s | CAP,CHIP CERAMIC 22000PF B1005 |
| C925 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C926 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C927 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C928 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C929 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C930 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C931 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C932 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C933 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C934 | 1-107-819-81 | s | CAP,CHIP CERAMIC 22000PF B1005 |
| C935 | 1-107-819-81 | s | CAP,CHIP CERAMIC 22000PF B1005 |
| C936 | 1-107-819-81 | s | CAP,CHIP CERAMIC 22000PF B1005 |
| C937 | 1-107-819-81 | s | CAP,CHIP CERAMIC 22000PF B1005 |
| C938 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C939 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C940 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C941 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C942 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C943 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C944 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C945 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C946 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C947 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C948 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C949 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C950 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C951 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C952 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C953 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C954 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C955 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C956 | 1-107-819-81 | s | CAP,CHIP CERAMIC 22000PF B1005 |
| C957 | 1-107-819-81 | s | CAP,CHIP CERAMIC 22000PF B1005 |
| C958 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C959 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C960 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C961 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C962 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C963 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C964 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C965 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C966 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C967 | 1-107-819-81 | s | CAP,CHIP CERAMIC 22000PF B1005 |
| C968 | 1-107-819-81 | s | CAP,CHIP CERAMIC 22000PF B1005 |
| C969 | 1-107-819-81 | s | CAP,CHIP CERAMIC 22000PF B1005 |
| C970 | 1-107-819-81 | s | CAP,CHIP CERAMIC 22000PF B1005 |
| C971 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C972 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C973 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C974 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C975 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C976 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C977 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C978 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |

(DPR-265C BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C979 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C980 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C981 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C982 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C983 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C984 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C985 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C986 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C987 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C988 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C989 | 1-107-819-81 | s | CAP,CHIP CERAMIC 22000PF B1005 |
| C990 | 1-107-819-81 | s | CAP,CHIP CERAMIC 22000PF B1005 |
| C991 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C992 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C993 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C994 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C995 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C996 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C997 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C998 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C999 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| D11 | 8-719-064-52 | s | DIODE CL-191YG-CD-T |
| D102 | 8-719-017-03 | s | DIODE 02DZ4.7-TPH3 |
| D103 | 8-719-017-03 | s | DIODE 02DZ4.7-TPH3 |
| D104 | 8-719-820-42 | s | DIODE 1SS302-TE85L |
| D501 | 8-719-820-42 | s | DIODE 1SS302-TE85L |
| D502 | 8-719-820-42 | s | DIODE 1SS302-TE85L |
| D504 | 8-719-820-42 | s | DIODE 1SS302-TE85L |
| D505 | 8-719-820-42 | s | DIODE 1SS302-TE85L |
| D506 | 8-719-820-42 | s | DIODE 1SS302-TE85L |
| D507 | 8-719-820-42 | s | DIODE 1SS302-TE85L |
| E1 | 1-535-877-22 | s | CHIP, CHECKER |
| E2 | 1-535-877-22 | s | CHIP, CHECKER |
| FB101 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB102 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB103 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB104 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB105 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB106 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB107 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB108 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB501 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB502 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB503 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB602 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB603 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB604 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB605 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB606 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB607 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB608 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB609 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB610 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB611 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB612 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB613 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB901 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB902 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |

(DPR-265C BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| FB903 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB904 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB905 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB906 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB907 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB908 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB909 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB910 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB911 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB912 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB913 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB914 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB915 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB916 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB917 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB918 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB919 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB920 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB921 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB922 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB923 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB924 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB925 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB926 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB927 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FL201 | 1-813-542-11 | s | FILTER, LOW PASS |
| FL202 | 1-813-542-11 | s | FILTER, LOW PASS |
| FL203 | 1-813-542-11 | s | FILTER, LOW PASS |
| IC101 | 6-704-976-01 | s | IC ADR381ARTZ-REEL7 |
| IC102 | 8-759-327-01 | s | IC NJM062V(TE2) |
| IC103 | 8-759-327-01 | s | IC NJM062V(TE2) |
| IC104 | 6-701-572-01 | s | IC TPS54610PWPR |
| IC105 | 6-701-572-01 | s | IC TPS54610PWPR |
| IC106 | 6-706-482-01 | s | IC TC7SH00FU(T5RSOYJF) |
| IC107 | 8-759-392-77 | s | IC SN74LVC245APWR |
| IC108 | 8-759-392-77 | s | IC SN74LVC245APWR |
| IC110 | 8-759-346-27 | s | IC LM45BIM3X |
| IC111 | 6-706-487-01 | s | IC TC7SH08FU(T5RSOYJF) |
| IC201 | 6-706-863-01 | s | IC LMH6732MFX/NOPB |
| IC202 | 6-706-863-01 | s | IC LMH6732MFX/NOPB |
| IC203 | 6-706-863-01 | s | IC LMH6732MFX/NOPB |
| IC204 | 6-708-676-01 | s | IC AD8138ARMZ-REEL7 |
| IC205 | 6-708-676-01 | s | IC AD8138ARMZ-REEL7 |
| IC206 | 6-708-676-01 | s | IC AD8138ARMZ-REEL7 |
| IC208 | 6-708-675-01 | s | IC LTC2249IUH#TR-500 |
| IC209 | 6-708-675-01 | s | IC LTC2249IUH#TR-500 |
| IC210 | 8-759-564-49 | s | IC TC7W53FU(TE12R) |
| IC211 | 8-759-564-49 | s | IC TC7W53FU(TE12R) |
| IC212 | 8-759-564-49 | s | IC TC7W53FU(TE12R) |
| IC225 | 8-759-327-01 | s | IC NJM062V(TE2) |
| IC226 | 8-759-327-01 | s | IC NJM062V(TE2) |
| IC230 | 6-700-915-01 | s | IC TC74VHCT04AFT(EL) |
| IC232 | 6-708-675-01 | s | IC LTC2249IUH#TR-500 |
| IC302 | 6-700-804-01 | s | IC SN74LVC574APWR |
| IC303 | 6-700-804-01 | s | IC SN74LVC574APWR |
| IC305 | 6-700-804-01 | s | IC SN74LVC574APWR |
| IC306 | 6-700-804-01 | s | IC SN74LVC574APWR |
| IC308 | 6-700-804-01 | s | IC SN74LVC574APWR |

(DPR-265C BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| IC310 | 6-706-487-01 | s | IC TC7SH08FU(T5RSOYJF) |
| IC501 | 8-759-485-24 | s | IC MC74HC4046ADTR2 |
| IC502 | 8-759-485-24 | s | IC MC74HC4046ADTR2 |
| IC503 | 8-759-564-49 | s | IC TC7W53FU(TE12R) |
| IC504 | 8-759-564-49 | s | IC TC7W53FU(TE12R) |
| IC505 | 8-759-564-49 | s | IC TC7W53FU(TE12R) |
| IC506 | 8-759-675-47 | s | IC SN74LVC04APWR |
| IC507 | 8-759-675-47 | s | IC SN74LVC04APWR |
| IC509 | 6-702-787-01 | s | IC UPD6467GR-525-E2 |
| IC510 | 6-702-787-01 | s | IC UPD6467GR-525-E2 |
| IC511 | 8-759-276-25 | s | IC TLC272CPSR |
| IC512 | 6-706-478-01 | s | IC TC7SET08FU(T5RSOJF) |
| IC513 | 6-706-478-01 | s | IC TC7SET08FU(T5RSOJF) |
| IC514 | 6-706-478-01 | s | IC TC7SET08FU(T5RSOJF) |
| IC515 | 6-706-478-01 | s | IC TC7SET08FU(T5RSOJF) |
| IC516 | 8-759-592-42 | s | IC TC7SZ00FU(TE85R) |
| IC517 | 8-759-592-42 | s | IC TC7SZ00FU(TE85R) |
| IC518 | 8-759-592-42 | s | IC TC7SZ00FU(TE85R) |
| IC519 | 8-759-592-42 | s | IC TC7SZ00FU(TE85R) |
| IC520 | 8-759-592-42 | s | IC TC7SZ00FU(TE85R) |
| IC521 | 8-759-592-42 | s | IC TC7SZ00FU(TE85R) |
| IC522 | 6-706-487-01 | s | IC TC7SH08FU(T5RSOYJF) |
| IC523 | 6-706-487-01 | s | IC TC7SH08FU(T5RSOYJF) |
| IC802 | 8-759-679-57 | s | IC SN74LVC00APWR |
| IC803 | 8-759-592-42 | s | IC TC7SZ00FU(TE85R) |
| IC804 | 6-706-487-01 | s | IC TC7SH08FU(T5RSOYJF) |
| IC805 | 6-706-487-01 | s | IC TC7SH08FU(T5RSOYJF) |
| IC901 | 6-706-350-01 | s | IC EDD2516AKTA-6B-E |
| IC902 | 6-706-350-01 | s | IC EDD2516AKTA-6B-E |
| IC905 | 6-706-350-01 | s | IC EDD2516AKTA-6B-E |
| IC906 | 6-706-350-01 | s | IC EDD2516AKTA-6B-E |
| L101 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L102 | 1-416-948-21 | s | COIL, CHOKE 10UH |
| L103 | 1-416-948-21 | s | COIL, CHOKE 10UH |
| L104 | 1-419-491-21 | s | COIL, CHOKE 10UH |
| L105 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L106 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L107 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L108 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L109 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L111 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L112 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L201 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L202 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L203 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L204 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L205 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L206 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L207 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L208 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L209 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L210 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L211 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L212 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L213 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L214 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L215 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L216 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |

(DPR-265C BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| L217 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L218 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L219 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L220 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L221 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L222 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L401 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L402 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L403 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L404 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L405 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L406 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L407 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L501 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L502 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L503 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L504 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L505 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L506 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L507 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L509 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L510 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L511 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L512 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L601 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L602 | 1-414-457-21 | s | INDUCTOR, CHIP (S) 3.3NH |
| L603 | 1-414-457-21 | s | INDUCTOR, CHIP (S) 3.3NH |
| L801 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L802 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L803 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L804 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L805 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L806 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| Q11 | 8-729-928-28 | s | TRANSISTOR DTA144EE-TL |
| Q101 | 8-729-230-27 | s | TRANSISTOR 2SA1213Y-TE12L |
| Q102 | 8-729-230-27 | s | TRANSISTOR 2SA1213Y-TE12L |
| Q103 | 8-729-209-77 | s | TRANSISTOR 2SC2873Y-TE12L |
| Q104 | 8-729-230-27 | s | TRANSISTOR 2SA1213Y-TE12L |
| Q105 | 8-729-927-99 | s | TRANSISTOR 2SC4617TL-QR |
| Q106 | 8-729-927-99 | s | TRANSISTOR 2SC4617TL-QR |
| Q107 | 8-729-928-19 | s | TRANSISTOR 2SA1774TL-QR |
| Q108 | 8-729-927-99 | s | TRANSISTOR 2SC4617TL-QR |
| Q501 | 8-729-928-82 | s | TRANSISTOR DTC144EE-TL |
| Q502 | 8-729-928-82 | s | TRANSISTOR DTC144EE-TL |
| Q503 | 8-729-928-82 | s | TRANSISTOR DTC144EE-TL |
| Q505 | 8-729-928-19 | s | TRANSISTOR 2SA1774TL-QR |
| Q507 | 8-729-928-19 | s | TRANSISTOR 2SA1774TL-QR |
| R11 | 1-220-230-91 | s | RES,SQUARE TYPE CHIP 2.2(3225) |
| R12 | 1-220-230-91 | s | RES,SQUARE TYPE CHIP 2.2(3225) |
| R101 | 1-218-945-81 | s | RES, CHIP 220 |
| R102 | 1-218-945-81 | s | RES, CHIP 220 |
| R103 | 1-208-933-81 | s | RES, CHIP 82K (1005) |
| R104 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R105 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R106 | 1-218-953-81 | s | RES, CHIP 1.0K |
| R107 | 1-218-953-81 | s | RES, CHIP 1.0K |
| R108 | 1-218-977-81 | s | RES, CHIP 100K |
| R109 | 1-218-945-81 | s | RES, CHIP 220 |

(DPR-265C BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R111 | 1-218-945-81 | s | RES, CHIP 220 |
| R112 | 1-208-715-11 | s | RES, CHIP 22K (1005) |
| R113 | 1-208-715-11 | s | RES, CHIP 22K (1005) |
| R114 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R115 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R116 | 1-208-715-11 | s | RES, CHIP 22K (1005) |
| R117 | 1-208-703-11 | s | RES, CHIP 6.8K (1005) |
| R118 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R119 | 1-218-973-81 | s | RES, CHIP 47K |
| R120 | 1-218-941-81 | s | RES, CHIP 100 |
| R121 | 1-218-953-81 | s | RES, CHIP 1.0K |
| R122 | 1-218-965-81 | s | RES, CHIP 10K |
| R123 | 1-208-931-81 | s | RES, CHIP 68K (1005) |
| R124 | 1-208-891-81 | s | RES, CHIP 1.5K (1005) |
| R125 | 1-208-891-81 | s | RES, CHIP 1.5K (1005) |
| R126 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R127 | 1-208-931-81 | s | RES, CHIP 68K (1005) |
| R128 | 1-218-941-81 | s | RES, CHIP 100 |
| R129 | 1-218-941-81 | s | RES, CHIP 100 |
| R130 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R131 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R132 | 1-208-715-11 | s | RES, CHIP 22K (1005) |
| R133 | 1-208-699-11 | s | RES, CHIP 4.7K (1005) |
| R134 | 1-208-715-11 | s | RES, CHIP 22K (1005) |
| R135 | 1-208-931-81 | s | RES, CHIP 68K (1005) |
| R136 | 1-208-905-81 | s | RES, CHIP 5.6K (1005) |
| R137 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R138 | 1-218-941-81 | s | RES, CHIP 100 |
| R141 | 1-218-937-81 | s | RES, CHIP 47 |
| R142 | 1-218-937-81 | s | RES, CHIP 47 |
| R143 | 1-218-937-81 | s | RES, CHIP 47 |
| R144 | 1-218-941-81 | s | RES, CHIP 100 |
| R145 | 1-218-941-81 | s | RES, CHIP 100 |
| R146 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R147 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R148 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R149 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R150 | 1-218-945-81 | s | RES, CHIP 220 |
| R151 | 1-208-715-11 | s | RES, CHIP 22K (1005) |
| R152 | 1-208-715-11 | s | RES, CHIP 22K (1005) |
| R153 | 1-208-715-11 | s | RES, CHIP 22K (1005) |
| R154 | 1-218-929-81 | s | RES, CHIP 10 |
| R155 | 1-208-715-11 | s | RES, CHIP 22K (1005) |
| R166 | 1-218-965-81 | s | RES, CHIP 10K |
| R167 | 1-218-965-81 | s | RES, CHIP 10K |
| R168 | 1-218-973-81 | s | RES, CHIP 47K |
| R169 | 1-208-931-81 | s | RES, CHIP 68K (1005) |
| R170 | 1-218-941-81 | s | RES, CHIP 100 |
| R171 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R172 | 1-218-937-81 | s | RES, CHIP 47 |
| R173 | 1-218-973-81 | s | RES, CHIP 47K |
| R174 | 1-218-941-81 | s | RES, CHIP 100 |
| R201 | 1-218-965-81 | s | RES, CHIP 10K |
| R202 | 1-218-965-81 | s | RES, CHIP 10K |
| R203 | 1-218-965-81 | s | RES, CHIP 10K |
| R204 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R205 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R206 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R207 | 1-208-883-81 | s | RES, CHIP 680 (1005) |

(DPR-265C BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R208 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R209 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R210 | 1-218-937-81 | s | RES, CHIP 47 |
| R211 | 1-218-937-81 | s | RES, CHIP 47 |
| R212 | 1-218-937-81 | s | RES, CHIP 47 |
| R213 | 1-218-969-81 | s | RES, CHIP 22K |
| R214 | 1-218-969-81 | s | RES, CHIP 22K |
| R215 | 1-218-969-81 | s | RES, CHIP 22K |
| R216 | 1-218-973-81 | s | RES, CHIP 47K |
| R217 | 1-218-973-81 | s | RES, CHIP 47K |
| R218 | 1-218-973-81 | s | RES, CHIP 47K |
| R219 | 1-208-691-11 | s | RES, CHIP 2.2K (1005) |
| R220 | 1-208-691-11 | s | RES, CHIP 2.2K (1005) |
| R221 | 1-208-691-11 | s | RES, CHIP 2.2K (1005) |
| R222 | 1-208-885-81 | s | RES, CHIP 820 (1005) |
| R223 | 1-218-977-81 | s | RES, CHIP 100K |
| R224 | 1-208-885-81 | s | RES, CHIP 820 (1005) |
| R225 | 1-218-977-81 | s | RES, CHIP 100K |
| R226 | 1-208-885-81 | s | RES, CHIP 820 (1005) |
| R227 | 1-218-977-81 | s | RES, CHIP 100K |
| R228 | 1-208-875-81 | s | RES, CHIP 330 (1005) |
| R229 | 1-208-875-81 | s | RES, CHIP 330 (1005) |
| R230 | 1-208-875-81 | s | RES, CHIP 330 (1005) |
| R234 | 1-218-961-81 | s | RES, CHIP 4.7K |
| R235 | 1-218-961-81 | s | RES, CHIP 4.7K |
| R236 | 1-218-961-81 | s | RES, CHIP 4.7K |
| R237 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R238 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R239 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R240 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R241 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R242 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R243 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R244 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R245 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R246 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R247 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R248 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R249 | 1-208-875-81 | s | RES, CHIP 330 (1005) |
| R250 | 1-208-875-81 | s | RES, CHIP 330 (1005) |
| R251 | 1-208-875-81 | s | RES, CHIP 330 (1005) |
| R252 | 1-208-875-81 | s | RES, CHIP 330 (1005) |
| R253 | 1-208-875-81 | s | RES, CHIP 330 (1005) |
| R254 | 1-208-875-81 | s | RES, CHIP 330 (1005) |
| R255 | 1-218-953-81 | s | RES, CHIP 1.0K |
| R256 | 1-218-953-81 | s | RES, CHIP 1.0K |
| R257 | 1-218-953-81 | s | RES, CHIP 1.0K |
| R258 | 1-216-803-91 | s | RES, CHIP 33 (1608) |
| R259 | 1-216-803-91 | s | RES, CHIP 33 (1608) |
| R260 | 1-216-803-91 | s | RES, CHIP 33 (1608) |
| R261 | 1-216-803-91 | s | RES, CHIP 33 (1608) |
| R262 | 1-216-803-91 | s | RES, CHIP 33 (1608) |
| R263 | 1-216-803-91 | s | RES, CHIP 33 (1608) |
| R264 | 1-218-941-81 | s | RES, CHIP 100 |
| R265 | 1-218-941-81 | s | RES, CHIP 100 |
| R266 | 1-218-941-81 | s | RES, CHIP 100 |
| R273 | 1-218-941-81 | s | RES, CHIP 100 |
| R274 | 1-218-941-81 | s | RES, CHIP 100 |
| R275 | 1-218-941-81 | s | RES, CHIP 100 |

(DPR-265C BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R276 | 1-218-941-81 | s | RES, CHIP 100 |
| R277 | 1-218-941-81 | s | RES, CHIP 100 |
| R278 | 1-218-941-81 | s | RES, CHIP 100 |
| R279 | 1-218-953-81 | s | RES, CHIP 1.0K |
| R280 | 1-218-953-81 | s | RES, CHIP 1.0K |
| R281 | 1-218-953-81 | s | RES, CHIP 1.0K |
| R282 | 1-218-941-81 | s | RES, CHIP 100 |
| R283 | 1-218-941-81 | s | RES, CHIP 100 |
| R284 | 1-218-941-81 | s | RES, CHIP 100 |
| R285 | 1-218-957-81 | s | RES, CHIP 2.2K |
| R286 | 1-218-957-81 | s | RES, CHIP 2.2K |
| R287 | 1-218-957-81 | s | RES, CHIP 2.2K |
| R288 | 1-218-965-81 | s | RES, CHIP 10K |
| R289 | 1-218-965-81 | s | RES, CHIP 10K |
| R290 | 1-218-965-81 | s | RES, CHIP 10K |
| R291 | 1-218-965-81 | s | RES, CHIP 10K |
| R292 | 1-218-965-81 | s | RES, CHIP 10K |
| R293 | 1-218-965-81 | s | RES, CHIP 10K |
| R294 | 1-218-965-81 | s | RES, CHIP 10K |
| R295 | 1-218-965-81 | s | RES, CHIP 10K |
| R296 | 1-218-965-81 | s | RES, CHIP 10K |
| R297 | 1-218-941-81 | s | RES, CHIP 100 |
| R298 | 1-218-941-81 | s | RES, CHIP 100 |
| R299 | 1-218-941-81 | s | RES, CHIP 100 |
| R300 | 1-218-941-81 | s | RES, CHIP 100 |
| R301 | 1-218-941-81 | s | RES, CHIP 100 |
| R302 | 1-218-941-81 | s | RES, CHIP 100 |
| R309 | 1-218-965-81 | s | RES, CHIP 10K |
| R310 | 1-218-965-81 | s | RES, CHIP 10K |
| R311 | 1-218-965-81 | s | RES, CHIP 10K |
| R312 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R313 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R314 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R315 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R316 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R317 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R318 | 1-218-937-81 | s | RES, CHIP 47 |
| R319 | 1-218-937-81 | s | RES, CHIP 47 |
| R320 | 1-218-937-81 | s | RES, CHIP 47 |
| R321 | 1-218-969-81 | s | RES, CHIP 22K |
| R322 | 1-218-969-81 | s | RES, CHIP 22K |
| R323 | 1-218-969-81 | s | RES, CHIP 22K |
| R324 | 1-218-973-81 | s | RES, CHIP 47K |
| R325 | 1-218-973-81 | s | RES, CHIP 47K |
| R326 | 1-218-973-81 | s | RES, CHIP 47K |
| R327 | 1-208-691-11 | s | RES, CHIP 2.2K (1005) |
| R328 | 1-208-691-11 | s | RES, CHIP 2.2K (1005) |
| R329 | 1-208-691-11 | s | RES, CHIP 2.2K (1005) |
| R330 | 1-208-885-81 | s | RES, CHIP 820 (1005) |
| R331 | 1-218-977-81 | s | RES, CHIP 100K |
| R332 | 1-208-885-81 | s | RES, CHIP 820 (1005) |
| R333 | 1-218-977-81 | s | RES, CHIP 100K |
| R334 | 1-208-885-81 | s | RES, CHIP 820 (1005) |
| R335 | 1-218-977-81 | s | RES, CHIP 100K |
| R336 | 1-208-875-81 | s | RES, CHIP 330 (1005) |
| R337 | 1-208-875-81 | s | RES, CHIP 330 (1005) |
| R338 | 1-208-875-81 | s | RES, CHIP 330 (1005) |
| R342 | 1-218-961-81 | s | RES, CHIP 4.7K |
| R343 | 1-218-961-81 | s | RES, CHIP 4.7K |

(DPR-265C BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R344 | 1-218-961-81 | s | RES, CHIP 4.7K |
| R345 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R346 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R347 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R348 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R349 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R350 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R351 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R352 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R353 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R354 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R355 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R356 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R357 | 1-208-875-81 | s | RES, CHIP 330 (1005) |
| R358 | 1-208-875-81 | s | RES, CHIP 330 (1005) |
| R359 | 1-208-875-81 | s | RES, CHIP 330 (1005) |
| R360 | 1-208-875-81 | s | RES, CHIP 330 (1005) |
| R361 | 1-208-875-81 | s | RES, CHIP 330 (1005) |
| R362 | 1-208-875-81 | s | RES, CHIP 330 (1005) |
| R363 | 1-218-953-81 | s | RES, CHIP 1.0K |
| R364 | 1-218-953-81 | s | RES, CHIP 1.0K |
| R365 | 1-218-953-81 | s | RES, CHIP 1.0K |
| R366 | 1-216-803-91 | s | RES, CHIP 33 (1608) |
| R367 | 1-216-803-91 | s | RES, CHIP 33 (1608) |
| R368 | 1-216-803-91 | s | RES, CHIP 33 (1608) |
| R369 | 1-216-803-91 | s | RES, CHIP 33 (1608) |
| R370 | 1-216-803-91 | s | RES, CHIP 33 (1608) |
| R371 | 1-216-803-91 | s | RES, CHIP 33 (1608) |
| R372 | 1-218-941-81 | s | RES, CHIP 100 |
| R373 | 1-218-941-81 | s | RES, CHIP 100 |
| R374 | 1-218-941-81 | s | RES, CHIP 100 |
| R381 | 1-218-941-81 | s | RES, CHIP 100 |
| R382 | 1-218-941-81 | s | RES, CHIP 100 |
| R383 | 1-218-941-81 | s | RES, CHIP 100 |
| R384 | 1-218-941-81 | s | RES, CHIP 100 |
| R385 | 1-218-941-81 | s | RES, CHIP 100 |
| R386 | 1-218-941-81 | s | RES, CHIP 100 |
| R387 | 1-218-965-81 | s | RES, CHIP 10K |
| R388 | 1-218-965-81 | s | RES, CHIP 10K |
| R389 | 1-218-965-81 | s | RES, CHIP 10K |
| R390 | 1-218-941-81 | s | RES, CHIP 100 |
| R391 | 1-218-941-81 | s | RES, CHIP 100 |
| R392 | 1-218-941-81 | s | RES, CHIP 100 |
| R393 | 1-218-957-81 | s | RES, CHIP 2.2K |
| R394 | 1-218-957-81 | s | RES, CHIP 2.2K |
| R395 | 1-218-957-81 | s | RES, CHIP 2.2K |
| R396 | 1-218-965-81 | s | RES, CHIP 10K |
| R397 | 1-218-965-81 | s | RES, CHIP 10K |
| R398 | 1-218-965-81 | s | RES, CHIP 10K |
| R399 | 1-218-973-81 | s | RES, CHIP 47K |
| R400 | 1-218-973-81 | s | RES, CHIP 47K |
| R401 | 1-208-931-81 | s | RES, CHIP 68K (1005) |
| R402 | 1-208-931-81 | s | RES, CHIP 68K (1005) |
| R403 | 1-208-931-81 | s | RES, CHIP 68K (1005) |
| R404 | 1-218-973-81 | s | RES, CHIP 47K |
| R405 | 1-208-931-81 | s | RES, CHIP 68K (1005) |
| R406 | 1-218-965-81 | s | RES, CHIP 10K |
| R407 | 1-218-965-81 | s | RES, CHIP 10K |
| R408 | 1-218-965-81 | s | RES, CHIP 10K |

(DPR-265C BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R409 | 1-218-965-81 | s | RES, CHIP 10K |
| R410 | 1-218-965-81 | s | RES, CHIP 10K |
| R411 | 1-218-965-81 | s | RES, CHIP 10K |
| R412 | 1-218-941-81 | s | RES, CHIP 100 |
| R413 | 1-218-965-81 | s | RES, CHIP 10K |
| R414 | 1-218-965-81 | s | RES, CHIP 10K |
| R415 | 1-218-941-81 | s | RES, CHIP 100 |
| R416 | 1-218-941-81 | s | RES, CHIP 100 |
| R417 | 1-218-941-81 | s | RES, CHIP 100 |
| R418 | 1-218-941-81 | s | RES, CHIP 100 |
| R419 | 1-218-941-81 | s | RES, CHIP 100 |
| R432 | 1-208-905-81 | s | RES, CHIP 5.6K (1005) |
| R433 | 1-208-905-81 | s | RES, CHIP 5.6K (1005) |
| R434 | 1-208-905-81 | s | RES, CHIP 5.6K (1005) |
| R435 | 1-208-905-81 | s | RES, CHIP 5.6K (1005) |
| R436 | 1-208-905-81 | s | RES, CHIP 5.6K (1005) |
| R437 | 1-208-905-81 | s | RES, CHIP 5.6K (1005) |
| R451 | 1-218-941-81 | s | RES, CHIP 100 |
| R452 | 1-218-937-81 | s | RES, CHIP 47 |
| R453 | 1-218-937-81 | s | RES, CHIP 47 |
| R454 | 1-218-937-81 | s | RES, CHIP 47 |
| R456 | 1-218-941-81 | s | RES, CHIP 100 |
| R457 | 1-218-941-81 | s | RES, CHIP 100 |
| R458 | 1-218-941-81 | s | RES, CHIP 100 |
| R459 | 1-218-937-81 | s | RES, CHIP 47 |
| R460 | 1-218-937-81 | s | RES, CHIP 47 |
| R461 | 1-218-945-81 | s | RES, CHIP 220 |
| R462 | 1-218-945-81 | s | RES, CHIP 220 |
| R463 | 1-218-941-81 | s | RES, CHIP 100 |
| R464 | 1-218-941-81 | s | RES, CHIP 100 |
| R465 | 1-218-941-81 | s | RES, CHIP 100 |
| R466 | 1-218-941-81 | s | RES, CHIP 100 |
| R467 | 1-218-941-81 | s | RES, CHIP 100 |
| R468 | 1-218-941-81 | s | RES, CHIP 100 |
| R469 | 1-218-941-81 | s | RES, CHIP 100 |
| R470 | 1-218-941-81 | s | RES, CHIP 100 |
| R471 | 1-218-941-81 | s | RES, CHIP 100 |
| R472 | 1-218-941-81 | s | RES, CHIP 100 |
| R473 | 1-218-953-81 | s | RES, CHIP 1.0K |
| R474 | 1-218-977-81 | s | RES, CHIP 100K |
| R475 | 1-218-941-81 | s | RES, CHIP 100 |
| R476 | 1-218-941-81 | s | RES, CHIP 100 |
| R478 | 1-218-977-81 | s | RES, CHIP 100K |
| R479 | 1-218-977-81 | s | RES, CHIP 100K |
| R480 | 1-218-941-81 | s | RES, CHIP 100 |
| R481 | 1-218-941-81 | s | RES, CHIP 100 |
| R482 | 1-218-941-81 | s | RES, CHIP 100 |
| R501 | 1-218-941-81 | s | RES, CHIP 100 |
| R502 | 1-218-941-81 | s | RES, CHIP 100 |
| R503 | 1-218-941-81 | s | RES, CHIP 100 |
| R504 | 1-218-941-81 | s | RES, CHIP 100 |
| R505 | 1-218-957-81 | s | RES, CHIP 2.2K |
| R506 | 1-218-957-81 | s | RES, CHIP 2.2K |
| R507 | 1-218-957-81 | s | RES, CHIP 2.2K |
| R508 | 1-218-957-81 | s | RES, CHIP 2.2K |
| R510 | 1-218-973-81 | s | RES, CHIP 47K |
| R511 | 1-218-965-81 | s | RES, CHIP 10K |
| R512 | 1-218-965-81 | s | RES, CHIP 10K |
| R513 | 1-218-957-81 | s | RES, CHIP 2.2K |

(DPR-265C BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R514 | 1-218-957-81 | s | RES, CHIP 2.2K |
| R515 | 1-218-977-81 | s | RES, CHIP 100K |
| R516 | 1-218-973-81 | s | RES, CHIP 47K |
| R517 | 1-218-973-81 | s | RES, CHIP 47K |
| R518 | 1-218-973-81 | s | RES, CHIP 47K |
| R519 | 1-218-953-81 | s | RES, CHIP 1.0K |
| R520 | 1-218-973-81 | s | RES, CHIP 47K |
| R521 | 1-218-957-81 | s | RES, CHIP 2.2K |
| R522 | 1-218-941-81 | s | RES, CHIP 100 |
| R523 | 1-218-965-81 | s | RES, CHIP 10K |
| R524 | 1-218-965-81 | s | RES, CHIP 10K |
| R525 | 1-218-977-81 | s | RES, CHIP 100K |
| R526 | 1-218-973-81 | s | RES, CHIP 47K |
| R527 | 1-218-965-81 | s | RES, CHIP 10K |
| R528 | 1-218-953-81 | s | RES, CHIP 1.0K |
| R529 | 1-218-961-81 | s | RES, CHIP 4.7K |
| R530 | 1-218-957-81 | s | RES, CHIP 2.2K |
| R531 | 1-218-965-81 | s | RES, CHIP 10K |
| R532 | 1-218-965-81 | s | RES, CHIP 10K |
| R533 | 1-218-965-81 | s | RES, CHIP 10K |
| R534 | 1-218-977-81 | s | RES, CHIP 100K |
| R535 | 1-208-933-81 | s | RES, CHIP 82K (1005) |
| R536 | 1-218-937-81 | s | RES, CHIP 47 |
| R537 | 1-218-965-81 | s | RES, CHIP 10K |
| R538 | 1-218-929-81 | s | RES, CHIP 10 |
| R539 | 1-218-965-81 | s | RES, CHIP 10K |
| R540 | 1-218-941-81 | s | RES, CHIP 100 |
| R541 | 1-218-929-81 | s | RES, CHIP 10 |
| R542 | 1-218-965-81 | s | RES, CHIP 10K |
| R543 | 1-218-929-81 | s | RES, CHIP 10 |
| R544 | 1-218-969-81 | s | RES, CHIP 22K |
| R545 | 1-218-929-81 | s | RES, CHIP 10 |
| R546 | 1-218-989-81 | s | RES, CHIP 1M |
| R547 | 1-218-953-81 | s | RES, CHIP 1.0K |
| R548 | 1-218-965-81 | s | RES, CHIP 10K |
| R549 | 1-218-965-81 | s | RES, CHIP 10K |
| R550 | 1-218-941-81 | s | RES, CHIP 100 |
| R551 | 1-218-941-81 | s | RES, CHIP 100 |
| R552 | 1-218-941-81 | s | RES, CHIP 100 |
| R553 | 1-218-965-81 | s | RES, CHIP 10K |
| R554 | 1-218-965-81 | s | RES, CHIP 10K |
| R555 | 1-218-941-81 | s | RES, CHIP 100 |
| R556 | 1-218-945-81 | s | RES, CHIP 220 |
| R557 | 1-218-941-81 | s | RES, CHIP 100 |
| R558 | 1-218-941-81 | s | RES, CHIP 100 |
| R559 | 1-218-941-81 | s | RES, CHIP 100 |
| R560 | 1-218-929-81 | s | RES, CHIP 10 |
| R561 | 1-218-929-81 | s | RES, CHIP 10 |
| R562 | 1-218-941-81 | s | RES, CHIP 100 |
| R563 | 1-218-941-81 | s | RES, CHIP 100 |
| R564 | 1-218-941-81 | s | RES, CHIP 100 |
| R565 | 1-218-941-81 | s | RES, CHIP 100 |
| R567 | 1-218-941-81 | s | RES, CHIP 100 |
| R568 | 1-218-941-81 | s | RES, CHIP 100 |
| R571 | 1-218-941-81 | s | RES, CHIP 100 |
| R572 | 1-218-957-81 | s | RES, CHIP 2.2K |
| R573 | 1-218-941-81 | s | RES, CHIP 100 |
| R574 | 1-218-941-81 | s | RES, CHIP 100 |
| R575 | 1-218-941-81 | s | RES, CHIP 100 |

(DPR-265C BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R576 | 1-218-957-81 | s | RES, CHIP 2.2K |
| R577 | 1-218-957-81 | s | RES, CHIP 2.2K |
| R578 | 1-218-973-81 | s | RES, CHIP 47K |
| R579 | 1-218-941-81 | s | RES, CHIP 100 |
| R580 | 1-218-941-81 | s | RES, CHIP 100 |
| R581 | 1-218-941-81 | s | RES, CHIP 100 |
| R582 | 1-218-965-81 | s | RES, CHIP 10K |
| R583 | 1-218-965-81 | s | RES, CHIP 10K |
| R584 | 1-218-941-81 | s | RES, CHIP 100 |
| R585 | 1-218-941-81 | s | RES, CHIP 100 |
| R602 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R603 | 1-208-711-11 | s | RES, CHIP 15K (1005) |
| R604 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R605 | 1-218-973-81 | s | RES, CHIP 47K |
| R606 | 1-218-937-81 | s | RES, CHIP 47 |
| R607 | 1-218-953-81 | s | RES, CHIP 1.0K |
| R608 | 1-218-953-81 | s | RES, CHIP 1.0K |
| R609 | 1-218-965-81 | s | RES, CHIP 10K |
| R610 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R611 | 1-218-973-81 | s | RES, CHIP 47K |
| R612 | 1-218-973-81 | s | RES, CHIP 47K |
| R613 | 1-218-973-81 | s | RES, CHIP 47K |
| R614 | 1-218-953-81 | s | RES, CHIP 1.0K |
| R615 | 1-218-953-81 | s | RES, CHIP 1.0K |
| R616 | 1-218-953-81 | s | RES, CHIP 1.0K |
| R618 | 1-208-873-81 | s | RES, CHIP 270 (1005) |
| R619 | 1-218-973-81 | s | RES, CHIP 47K |
| R620 | 1-218-953-81 | s | RES, CHIP 1.0K |
| R621 | 1-218-953-81 | s | RES, CHIP 1.0K |
| R622 | 1-218-953-81 | s | RES, CHIP 1.0K |
| R623 | 1-218-953-81 | s | RES, CHIP 1.0K |
| R624 | 1-218-953-81 | s | RES, CHIP 1.0K |
| R625 | 1-218-953-81 | s | RES, CHIP 1.0K |
| R626 | 1-218-953-81 | s | RES, CHIP 1.0K |
| R627 | 1-218-953-81 | s | RES, CHIP 1.0K |
| R628 | 1-218-973-81 | s | RES, CHIP 47K |
| R629 | 1-218-973-81 | s | RES, CHIP 47K |
| R630 | 1-211-990-91 | s | RES, CHIP 75 (1608) |
| R631 | 1-211-990-91 | s | RES, CHIP 75 (1608) |
| R632 | 1-211-990-91 | s | RES, CHIP 75 (1608) |
| R633 | 1-211-990-91 | s | RES, CHIP 75 (1608) |
| R634 | 1-208-891-81 | s | RES, CHIP 1.5K (1005) |
| R635 | 1-218-953-81 | s | RES, CHIP 1.0K |
| R636 | 1-208-891-81 | s | RES, CHIP 1.5K (1005) |
| R637 | 1-218-973-81 | s | RES, CHIP 47K |
| R638 | 1-218-953-81 | s | RES, CHIP 1.0K |
| R639 | 1-218-973-81 | s | RES, CHIP 47K |
| R640 | 1-218-973-81 | s | RES, CHIP 47K |
| R641 | 1-218-965-81 | s | RES, CHIP 10K |
| R642 | 1-211-990-91 | s | RES, CHIP 75 (1608) |
| R643 | 1-211-990-91 | s | RES, CHIP 75 (1608) |
| R644 | 1-218-969-81 | s | RES, CHIP 22K |
| R645 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R646 | 1-218-823-91 | s | RES, CHIP 100 (1608) |
| R647 | 1-218-957-81 | s | RES, CHIP 2.2K |
| R648 | 1-218-957-81 | s | RES, CHIP 2.2K |
| R649 | 1-218-957-81 | s | RES, CHIP 2.2K |
| R650 | 1-218-973-81 | s | RES, CHIP 47K |
| R651 | 1-211-990-91 | s | RES, CHIP 75 (1608) |

(DPR-265C BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R652 | 1-218-977-81 | s | RES, CHIP 100K |
| R653 | 1-218-973-81 | s | RES, CHIP 47K |
| R654 | 1-218-973-81 | s | RES, CHIP 47K |
| R801 | 1-218-945-81 | s | RES, CHIP 220 |
| R802 | 1-218-945-81 | s | RES, CHIP 220 |
| R803 | 1-218-941-81 | s | RES, CHIP 100 |
| R804 | 1-218-941-81 | s | RES, CHIP 100 |
| R805 | 1-218-941-81 | s | RES, CHIP 100 |
| R806 | 1-218-941-81 | s | RES, CHIP 100 |
| R807 | 1-218-957-81 | s | RES, CHIP 2.2K |
| R808 | 1-218-941-81 | s | RES, CHIP 100 |
| R810 | 1-218-941-81 | s | RES, CHIP 100 |
| R811 | 1-218-957-81 | s | RES, CHIP 2.2K |
| R812 | 1-218-937-81 | s | RES, CHIP 47 |
| R813 | 1-218-941-81 | s | RES, CHIP 100 |
| R814 | 1-218-953-81 | s | RES, CHIP 1.0K |
| R815 | 1-218-941-81 | s | RES, CHIP 100 |
| R816 | 1-218-929-81 | s | RES, CHIP 10 |
| R817 | 1-218-941-81 | s | RES, CHIP 100 |
| R818 | 1-218-941-81 | s | RES, CHIP 100 |
| R819 | 1-218-941-81 | s | RES, CHIP 100 |
| R820 | 1-218-941-81 | s | RES, CHIP 100 |
| R821 | 1-218-941-81 | s | RES, CHIP 100 |
| R822 | 1-218-941-81 | s | RES, CHIP 100 |
| R823 | 1-218-965-81 | s | RES, CHIP 10K |
| R824 | 1-218-941-81 | s | RES, CHIP 100 |
| R825 | 1-218-941-81 | s | RES, CHIP 100 |
| R901 | 1-218-965-81 | s | RES, CHIP 10K |
| R902 | 1-218-965-81 | s | RES, CHIP 10K |
| R903 | 1-218-941-81 | s | RES, CHIP 100 |
| R904 | 1-218-941-81 | s | RES, CHIP 100 |
| R905 | 1-218-941-81 | s | RES, CHIP 100 |
| R906 | 1-218-941-81 | s | RES, CHIP 100 |
| R907 | 1-218-965-81 | s | RES, CHIP 10K |
| R908 | 1-218-965-81 | s | RES, CHIP 10K |
| R909 | 1-218-965-81 | s | RES, CHIP 10K |
| R910 | 1-218-941-81 | s | RES, CHIP 100 |
| R911 | 1-218-941-81 | s | RES, CHIP 100 |
| R912 | 1-218-965-81 | s | RES, CHIP 10K |
| R913 | 1-218-965-81 | s | RES, CHIP 10K |
| R914 | 1-218-965-81 | s | RES, CHIP 10K |
| R915 | 1-218-941-81 | s | RES, CHIP 100 |
| R916 | 1-218-941-81 | s | RES, CHIP 100 |
| R917 | 1-218-941-81 | s | RES, CHIP 100 |
| R918 | 1-218-941-81 | s | RES, CHIP 100 |
| R919 | 1-218-965-81 | s | RES, CHIP 10K |
| R920 | 1-218-965-81 | s | RES, CHIP 10K |
| R921 | 1-218-965-81 | s | RES, CHIP 10K |
| R922 | 1-218-941-81 | s | RES, CHIP 100 |
| R923 | 1-218-941-81 | s | RES, CHIP 100 |
| R924 | 1-218-965-81 | s | RES, CHIP 10K |
| R925 | 1-218-965-81 | s | RES, CHIP 10K |
| R926 | 1-218-965-81 | s | RES, CHIP 10K |
| R927 | 1-218-941-81 | s | RES, CHIP 100 |
| R928 | 1-218-941-81 | s | RES, CHIP 100 |
| R929 | 1-218-941-81 | s | RES, CHIP 100 |
| R930 | 1-218-941-81 | s | RES, CHIP 100 |
| R931 | 1-218-965-81 | s | RES, CHIP 10K |
| R932 | 1-218-965-81 | s | RES, CHIP 10K |

(DPR-265C BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R933 | 1-218-965-81 | s | RES, CHIP 10K |
| R934 | 1-218-941-81 | s | RES, CHIP 100 |
| R935 | 1-218-941-81 | s | RES, CHIP 100 |
| R936 | 1-218-965-81 | s | RES, CHIP 10K |
| RB101 | 1-234-380-21 | s | RES, NETWORK 47K (1005X4) |
| RB102 | 1-234-380-21 | s | RES, NETWORK 47K (1005X4) |
| RB103 | 1-234-380-21 | s | RES, NETWORK 47K (1005X4) |
| RB104 | 1-234-380-21 | s | RES, NETWORK 47K (1005X4) |
| RB105 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB106 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB107 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB108 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB110 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB111 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB112 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB113 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB301 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB302 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB303 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB304 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB306 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB307 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB308 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB309 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB310 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB311 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB312 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB313 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB314 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB316 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB317 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB318 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB320 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB321 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB322 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB323 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB324 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB325 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB326 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB327 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB328 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB329 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB330 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB331 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB332 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB333 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB334 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB336 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB337 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB338 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB340 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB341 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB342 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB343 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB344 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB345 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB346 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB347 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB348 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |

(DPR-265C BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| RB349 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB350 | 1-234-380-21 | s | RES, NETWORK 47K (1005X4) |
| RB351 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB352 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB353 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB354 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB355 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB356 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB357 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB358 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB359 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB360 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB361 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB362 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB363 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB364 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB365 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB366 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB367 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB368 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB369 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB370 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB371 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB372 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB373 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB374 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB375 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB376 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB377 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB378 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB379 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB402 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB403 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB404 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB405 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB406 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB407 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB408 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB409 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB410 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB411 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB412 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB413 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB414 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB415 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB416 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB417 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB418 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB419 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB420 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB421 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB422 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB423 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB424 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB425 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB426 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB427 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB501 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB502 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |

(DPR-265C BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| RB503 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB504 | 1-234-378-21 | s | RES, NETWORK 10K (1005X4) |
| RB505 | 1-234-369-21 | s | RES, NETWORK 10 (1005X4) |
| RB506 | 1-234-369-21 | s | RES, NETWORK 10 (1005X4) |
| RB601 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB602 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB603 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB604 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB605 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB606 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB801 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB802 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB803 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB804 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB805 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB806 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB807 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB809 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB810 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB811 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB813 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB814 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB815 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB816 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB817 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB818 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB819 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB820 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB821 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB822 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB823 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB824 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB825 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB826 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB827 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB828 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB829 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB830 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB831 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB832 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB833 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB834 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB835 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB836 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB837 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB838 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB839 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB840 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB901 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB902 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB903 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB904 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB905 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB906 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB907 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB908 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB909 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB910 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB911 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |

(DPR-265C BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| RB912 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB913 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB914 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB915 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB916 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB917 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB918 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB919 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB920 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB921 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB922 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB923 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB924 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB925 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB926 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB927 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB928 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB929 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB930 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB931 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB932 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB933 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB934 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB935 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB936 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB937 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB938 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB939 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB940 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB941 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB942 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB943 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB944 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB945 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB946 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB947 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB948 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB949 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB950 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB951 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB952 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB953 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB954 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB955 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB956 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB957 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB958 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB959 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB960 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB961 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB962 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB963 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB964 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB965 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB966 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB967 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB968 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB969 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB970 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |

(DPR-265C BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| RB971 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB972 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB973 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB974 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB975 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB976 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB977 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB978 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB979 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB980 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB981 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB982 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB983 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB984 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB985 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB986 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB987 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB988 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB989 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB990 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB991 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB992 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB993 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB994 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB995 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB996 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB997 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB998 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB999 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| S13 | 1-771-709-41 | s | SWITCH, SLIDE |
| THP101 ⚠ | 1-804-616-21 | s | THERMISTOR, POSITIVE |
| THP102 ⚠ | 1-804-616-21 | s | THERMISTOR, POSITIVE |
| THP103 ⚠ | 1-804-616-21 | s | THERMISTOR, POSITIVE |
| THP104 ⚠ | 1-804-616-21 | s | THERMISTOR, POSITIVE |
| THP105 ⚠ | 1-804-458-21 | s | THERMISTOR, POSITIVE |
| THP106 ⚠ | 1-804-616-21 | s | THERMISTOR, POSITIVE |
| TP1 | 1-535-877-22 | s | CHIP, CHECKER |
| TP2 | 1-535-877-22 | s | CHIP, CHECKER |
| TP3 | 1-535-877-22 | s | CHIP, CHECKER |
| TP4 | 1-535-877-22 | s | CHIP, CHECKER |
| TP501 | 1-535-877-22 | s | CHIP, CHECKER |
| TP502 | 1-535-877-22 | s | CHIP, CHECKER |
| X501 | 1-795-670-12 | s | OSCILLATOR, CRYSTAL (VCXO)3.3V |
| X503 | 1-813-212-11 | s | OSCILLATOR, CRYSTAL |

---
DR-528 BOARD
---

*1: [Board No. suffix 14,21]
*2: [Board No. suffix 22-]

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| 1pc | A-1159-981-A | s | MOUNTED CIRCUIT BOARD, DR-528G (GOLD) |
| | A-1099-260-A | s | MOUNTED CIRCUIT BOARD, DR-528 (SILVER) |
| C1 | 1-126-390-11 | s | CAPACITOR ELECT 22MF/6.3V(105) |
| C2 | 1-126-395-11 | s | CAPACITOR,ELECT 22MF/16V(CHIP) |
| C3 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C4 | 1-126-390-11 | s | CAPACITOR ELECT 22MF/6.3V(105) |
| C5 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C6 | 1-165-884-91 | s | CAPACITOR, CERAMIC 2.2MF(1608) |
| C7 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C8 | 1-165-884-91 | s | CAPACITOR, CERAMIC 2.2MF(1608) |
| C9 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C10 | 1-115-339-11 | s | CAPACITOR,CERAMIC 0.1MF/50V |
| C11 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C12 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C13 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C14 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C15 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C16 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C17 | 1-165-872-21 | s | CAPACITOR,SOLID ELECT 47MF |
| C18 | 1-165-884-91 | s | CAPACITOR, CERAMIC 2.2MF(1608) |
| C19 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C20 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C21 | 1-115-339-11 | s | CAPACITOR,CERAMIC 0.1MF/50V |
| C22 | 1-165-881-21 | s | CAPACITOR, ELECT 120MF(6.3X6) |
| C23 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C24 | 1-165-872-21 | s | CAPACITOR,SOLID ELECT 47MF |
| C25 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C26 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C27 | 1-135-960-91 | s | CAP, CHIP CERAMIC 10MF B(3225) |
| C28 | 1-135-960-91 | s | CAP, CHIP CERAMIC 10MF B(3225) |
| C29 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C30 | 1-131-661-11 | s | CAPACITOR,ELECT 100MF/10V CHIP |
| C31 | 1-100-743-91 | s | CAPACITOR,CERAMIC2.2MF B(2012) |
| C32 | 1-100-743-91 | s | CAPACITOR,CERAMIC2.2MF B(2012) |
| C33 | 1-135-343-11 | s | CAPACITOR,SOLID ELECT 120MF |
| C34 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C35 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C36 | 1-100-165-21 | s | CAP, ELECT 47MF (8X7) |
| C37 | 1-135-343-11 | s | CAPACITOR,SOLID ELECT 120MF |
| C38 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C39 | 1-115-339-11 | s | CAPACITOR,CERAMIC 0.1MF/50V |
| C40 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C41 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C42 | 1-165-884-91 | s | CAPACITOR, CERAMIC 2.2MF(1608) |
| C43 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C44 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C45 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C46 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C47 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C48 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C49 | 1-115-339-11 | s | CAPACITOR,CERAMIC 0.1MF/50V |
| C50 | 1-165-629-11 | s | CAPACITOR,CERAMIC 1MF B |
| C51 *1 | 1-107-826-11 | s | CAPACITOR,CHIP CERAMIC 0.1MF |
| *2 | 1-100-566-91 | s | CAP, CHIP CERAMIC 0.1MF B 1608 |
| C52 | 1-115-339-11 | s | CAPACITOR,CERAMIC 0.1MF/50V |

(DR-528 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description | |
|---|---|---|---|---|
| C53 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) | |
| C54 | 1-135-960-91 | s | CAP, CHIP CERAMIC 10MF B(3225) | |
| C55 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V | |
| C56 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V | |
| C57 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) | |
| C58 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V | |
| C60 | 1-115-339-11 | s | CAPACITOR,CERAMIC 0.1MF/50V | |
| C61 | 1-115-339-11 | s | CAPACITOR,CERAMIC 0.1MF/50V | |
| C62 | 1-115-339-11 | s | CAPACITOR,CERAMIC 0.1MF/50V | |
| C63 | 1-126-398-11 | s | CAPACITOR ELECT 4.7MF/35V(CHIP | |
| C64 | 1-115-339-11 | s | CAPACITOR,CERAMIC 0.1MF/50V | |
| C65 | 1-126-398-11 | s | CAPACITOR ELECT 4.7MF/35V(CHIP | |
| C66 | 1-115-339-11 | s | CAPACITOR,CERAMIC 0.1MF/50V | |
| C67 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V | |
| C68 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V | |
| C71 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V | |
| C72 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V | |
| C73 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V | |
| C74 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V | |
| CN1 | 1-778-535-31 | s | CONNECTOR, FFC/FPC(ZIF) AN 45P (GOLD) | |
| | 1-778-535-11 | o | CONNECTOR, FFC (ZIF) 45P (SILVER) | |
| CN2 | 1-764-441-51 | s | CONNECTOR, FPC 30P (GOLD) | |
| | 1-764-441-21 | s | CONNECTOR, FPC (30P) (SILVER) | |
| CN3 | 1-695-209-21 | s | PIN, CONNECTOR (PC BOARD) 15P | |
| CN4 | 1-770-677-11 | o | CONNECTOR,BOARD TO BOARD 50P | |
| D1 | 8-719-043-70 | s | DIODE MA6S121-(TX) | |
| D2 | 8-719-043-70 | s | DIODE MA6S121-(TX) | |
| D3 | 8-719-210-43 | s | DIODE EC10QS06 | |
| D4 | 8-719-043-70 | s | DIODE MA6S121-(TX) | |
| D5 | 8-719-043-70 | s | DIODE MA6S121-(TX) | |
| D6 | 8-719-059-52 | s | DIODE MA3J14300LSO | |
| D7 | 8-719-059-52 | s | DIODE MA3J14300LSO | |
| D8 | 8-719-421-27 | s | DIODE MA728 | |
| E1 | 1-535-877-22 | s | CHIP,CHECKER (TEST POINT) | |
| FB1 | 1-469-100-21 | s | FERRITE, EMI (SMD) | (1608) |
| FB2 | 1-469-100-21 | s | FERRITE, EMI (SMD) | (1608) |
| FB3 | 1-469-100-21 | s | FERRITE, EMI (SMD) | (1608) |
| FB4 | 1-469-100-21 | s | FERRITE, EMI (SMD) | (1608) |
| FB5 | 1-469-100-21 | s | FERRITE, EMI (SMD) | (1608) |
| FB6 | 1-469-100-21 | s | FERRITE, EMI (SMD) | (1608) |
| FB7 | 1-469-100-21 | s | FERRITE, EMI (SMD) | (1608) |
| FB8 | 1-469-100-21 | s | FERRITE, EMI (SMD) | (1608) |
| FB9 | 1-469-100-21 | s | FERRITE, EMI (SMD) | (1608) |
| FB10 | 1-469-100-21 | s | FERRITE, EMI (SMD) | (1608) |
| FB11 | 1-469-100-21 | s | FERRITE, EMI (SMD) | (1608) |
| FB12 | 1-469-100-21 | s | FERRITE, EMI (SMD) | (1608) |
| IC1 | 6-704-976-01 | s | IC ADR381ART-REEL7 | |
| IC2 | 8-759-549-20 | s | IC SN74LV541APWR | |
| IC3 | 8-759-573-97 | s | IC SN74LVC541APWR | |
| IC4 | 8-759-573-97 | s | IC SN74LVC541APWR | |
| IC5 | 8-759-685-33 | s | IC BU2500FV-E2 | |
| IC6 | 6-708-326-01 | s | IC TC74HCT4053AFT(EL) | |
| IC7 | 8-759-564-49 | s | IC TC7W53FU-TE12R | |
| IC8 | 8-759-564-49 | s | IC TC7W53FU-TE12R | |
| IC9 | 8-759-669-71 | s | IC PCF8591T/2 | |
| IC10 | 8-759-327-01 | s | IC NJM062V-TE2 | |

(DR-528 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| IC11 | 8-759-327-01 | s | IC NJM062V-TE2 |
| IC12 | 8-759-327-01 | s | IC NJM062V-TE2 |
| IC13 | 8-759-327-01 | s | IC NJM062V-TE2 |
| IC14 | 8-759-327-01 | s | IC NJM062V-TE2 |
| L1 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |
| L2 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |
| L3 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |
| L4 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |
| L5 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |
| Q1 | 8-729-143-13 | s | TRANSISTOR 2SC4176-B34 |
| Q2 | 8-729-143-13 | s | TRANSISTOR 2SC4176-B34 |
| Q3 | 8-729-143-07 | s | TRANSISTOR 2SA1610-Y33 |
| Q4 | 8-729-230-27 | s | TRANSISTOR 2SA1213Y-TE12L |
| Q5 | 8-729-143-13 | s | TRANSISTOR 2SC4176-B34 |
| Q6 | 8-729-143-13 | s | TRANSISTOR 2SC4176-B34 |
| Q7 | 8-729-143-13 | s | TRANSISTOR 2SC4176-B34 |
| Q8 | 8-729-143-07 | s | TRANSISTOR 2SA1610-Y33 |
| Q9 | 8-729-230-27 | s | TRANSISTOR 2SA1213Y-TE12L |
| Q10 | 8-729-230-27 | s | TRANSISTOR 2SA1213Y-TE12L |
| Q11 | 8-729-053-11 | s | TRANSISTOR FDC6561AN |
| Q12 | 8-729-053-12 | s | TRANSISTOR FDC6506P |
| Q13 | 8-729-053-12 | s | TRANSISTOR FDC6506P |
| Q14 | 8-729-053-12 | s | TRANSISTOR FDC6506P |
| Q15 | 8-729-053-12 | s | TRANSISTOR FDC6506P |
| Q16 | 8-729-053-11 | s | TRANSISTOR FDC6561AN |
| Q17 | 8-729-053-11 | s | TRANSISTOR FDC6561AN |
| Q18 | 8-729-053-11 | s | TRANSISTOR FDC6561AN |
| Q19 | 8-729-143-13 | s | TRANSISTOR 2SC4176-B34 |
| Q20 | 8-729-230-27 | s | TRANSISTOR 2SA1213Y-TE12L |
| Q21 | 8-729-143-07 | s | TRANSISTOR 2SA1610-Y33 |
| Q22 | 8-729-807-51 | s | TRANSISTOR 2SD1623-S |
| Q23 | 8-729-143-13 | s | TRANSISTOR 2SC4176-B34 |
| Q24 | 8-729-143-07 | s | TRANSISTOR 2SA1610-Y33 |
| Q25 | 8-729-143-13 | s | TRANSISTOR 2SC4176-B34 |
| Q26 | 8-729-143-13 | s | TRANSISTOR 2SC4176-B34 |
| Q27 | 8-729-143-07 | s | TRANSISTOR 2SA1610-Y33 |
| Q28 | 8-729-143-13 | s | TRANSISTOR 2SC4176-B34 |
| Q29 | 8-729-143-07 | s | TRANSISTOR 2SA1610-Y33 |
| Q30 | 8-729-053-11 | s | TRANSISTOR FDC6561AN |
| Q31 | 8-729-053-12 | s | TRANSISTOR FDC6506P |
| Q32 | 8-729-053-12 | s | TRANSISTOR FDC6506P |
| Q33 | 8-729-143-13 | s | TRANSISTOR 2SC4176-B34 |
| Q34 | 8-729-143-07 | s | TRANSISTOR 2SA1610-Y33 |
| Q35 | 8-729-053-11 | s | TRANSISTOR FDC6561AN |
| Q36 | 8-729-106-60 | s | TRANSISTOR 2SB1115A |
| Q37 | 8-729-421-71 | s | TRANSISTOR 2SK620 |
| R1 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R2 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R3 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R4 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R5 | 1-208-893-11 | s | RESISTOR, CHIP 1.8K (1005) |
| R6 | 1-208-703-11 | s | RESISTOR,CHIP 6.8K 1/16W(1005) |
| R7 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R8 | 1-208-687-11 | s | RESISTOR CHIP 1.5K 1/16W (1005 |
| R9 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R10 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R11 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R12 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R13 | 1-208-711-11 | s | RESISTOR CHIP 15K 1/16W (1005) |

(DR-528 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R14 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R15 | 1-208-893-11 | s | RESISTOR, CHIP 1.8K (1005) |
| R16 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R17 | 1-208-687-11 | s | RESISTOR CHIP 1.5K 1/16W (1005 |
| R18 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R19 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R20 | 1-208-905-11 | s | RESISTOR, CHIP 5.6K (1005) |
| R21 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R22 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R23 | 1-208-675-11 | s | RESISTOR CHIP 470 1/16W (1005) |
| R24 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R25 *1 | 1-220-803-81 | s | RESISTOR,CHIP4.7 1/16W (1005) |
| *2 | 1-216-797-91 | s | RES, CHIP 10 (1608) |
| R26 *1 | 1-220-803-81 | s | RESISTOR,CHIP4.7 1/16W (1005) |
| *2 | 1-216-797-91 | s | RES, CHIP 10 (1608) |
| R27 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R28 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R29 | 1-208-711-11 | s | RESISTOR CHIP 15K 1/16W (1005) |
| R30 | 1-208-703-11 | s | RESISTOR,CHIP 6.8K 1/16W(1005) |
| R31 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R32 | 1-208-711-11 | s | RESISTOR CHIP 15K 1/16W (1005) |
| R33 | 1-208-691-11 | s | RESISTOR CHIP 2.2K 1/16W(1005) |
| R34 | 1-208-679-11 | s | RESISTOR CHIP 680 1/16W (1005) |
| R35 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R36 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R38 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R39 | 1-208-643-11 | s | RESISTOR CHIP 22 1/16W (1005) |
| R40 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R41 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R42 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R43 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R44 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R45 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R46 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R47 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R48 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R49 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R50 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R51 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R52 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R53 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R54 | 1-208-713-11 | s | RESISTOR CHIP 18K 1/16W (1005) |
| R55 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R56 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R57 | 1-208-893-11 | s | RESISTOR, CHIP 1.8K (1005) |
| R58 | 1-208-687-11 | s | RESISTOR CHIP 1.5K 1/16W (1005 |
| R59 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R60 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R61 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R62 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R63 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R64 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R65 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R66 *1 | 1-220-803-81 | s | RESISTOR,CHIP4.7 1/16W (1005) |
| *2 | 1-216-797-91 | s | RES, CHIP 10 (1608) |
| R67 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R68 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R69 | 1-208-691-11 | s | RESISTOR CHIP 2.2K 1/16W(1005) |
| R70 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R71 | 1-208-691-11 | s | RESISTOR CHIP 2.2K 1/16W(1005) |

(DR-528 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R72 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R73 | 1-208-643-11 | s | RESISTOR CHIP 22 1/16W (1005) |
| R74 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R75 | 1-220-874-11 | s | RES, CHIP 15 (1005) |
| R76 | 1-220-874-11 | s | RES, CHIP 15 (1005) |
| R77 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R78 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R79 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R80 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R82 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R83 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R84 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R85 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R86 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R87 | *2 1-216-797-91 | s | RES, CHIP 10 (1608) |
| R88 | *2 1-216-797-91 | s | RES, CHIP 10 (1608) |
| R89 | *2 1-216-797-91 | s | RES, CHIP 10 (1608) |
| R93 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R94 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R95 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R96 | 1-208-691-11 | s | RESISTOR CHIP 2.2K 1/16W(1005) |
| R97 | 1-208-691-11 | s | RESISTOR CHIP 2.2K 1/16W(1005) |
| R98 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R99 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R100 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| RB3 | 1-234-370-11 | s | RES, NETWORK 22X4 (1005) |
| RB4 | 1-234-381-21 | s | RES, NETWORK 100KX4 (1005) |
| RB5 | 1-234-381-21 | s | RES, NETWORK 100KX4 (1005) |

---

DR-562 BOARD

---

*1: [Board No. suffix 11]
*2: [Board No. suffix 21]
*3: [Board No. suffix 22-]

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| 1pc | A-1159-993-A | s | MOUNTED CIRCUIT BOARD, DR-562G (GOLD) |
| | A-1099-205-A | s | MOUNTED CIRCUIT BOARD, DR-562 (SILVER) |
| C1 | 1-126-390-11 | s | CAPACITOR ELECT 22MF/6.3V(105) |
| C2 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C3 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C4 | 1-165-884-91 | s | CAPACITOR, CERAMIC 2.2MF(1608) |
| C5 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C6 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C7 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C8 | 1-115-339-11 | s | CAPACITOR,CERAMIC 0.1MF/50V |
| C9 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C10 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C11 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C12 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C13 | 1-165-872-21 | s | CAPACITOR,SOLID ELECT 47MF |
| C14 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C15 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C16 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C17 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C18 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C19 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C20 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C21 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C22 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C23 | 1-126-390-11 | s | CAPACITOR ELECT 22MF/6.3V(105) |
| C24 | 1-126-395-11 | s | CAPACITOR,ELECT 22MF/16V(CHIP) |
| C25 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C26 | 1-115-339-11 | s | CAPACITOR,CERAMIC 0.1MF/50V |
| C27 | 1-165-884-91 | s | CAPACITOR, CERAMIC 2.2MF(1608) |
| C28 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C29 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C30 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C31 | 1-135-960-91 | s | CAP, CHIP CERAMIC 10MF B(3225) |
| C32 | 1-165-884-91 | s | CAPACITOR, CERAMIC 2.2MF(1608) |
| C33 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C34 | 1-165-881-21 | s | CAPACITOR, ELECT 120MF(6.3X6) |
| C35 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C36 | 1-165-872-21 | s | CAPACITOR,SOLID ELECT 47MF |
| C37 | 1-135-343-11 | s | CAPACITOR,SOLID ELECT 120MF |
| C38 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C39 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C40 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C41 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C42 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C43 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C44 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C45 | 1-135-960-91 | s | CAP, CHIP CERAMIC 10MF B(3225) |
| C46 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C47 | 1-107-886-11 | s | CAPACITOR ELECT 4700MF/16V(105 |
| C48 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C49 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C50 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C51 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C52 | 1-100-743-91 | s | CAPACITOR,CERAMIC2.2MF B(2012) |

(DR-562 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C53 | 1-100-743-91 | s | CAPACITOR,CERAMIC2.2MF B(2012) |
| C54 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C55 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C56 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C57 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C58 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C59 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C60 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C61 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C62 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C63 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C64 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C65 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C66 | 1-100-165-21 | s | CAP, ELECT 47MF (8X7) |
| C67 | 1-135-343-11 | s | CAPACITOR,SOLID ELECT 120MF |
| C68 | 1-115-339-11 | s | CAPACITOR,CERAMIC 0.1MF/50V |
| C69 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C70 | 1-165-884-91 | s | CAPACITOR, CERAMIC 2.2MF(1608) |
| C71 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C72 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C73 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C74 | 1-115-339-11 | s | CAPACITOR,CERAMIC 0.1MF/50V |
| C75 | 1-165-629-11 | s | CAPACITOR,CERAMIC 1MF B |
| C76 *1,2 | 1-107-826-11 | s | CAPACITOR,CHIP CERAMIC 0.1MF |
| *3 | 1-100-566-91 | s | CAP, CHIP CERAMIC 0.1MF B 1608 |
| C77 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C78 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C79 *1,2 | 1-165-908-11 | s | CAP, CERAMIC 1MF B 1608 |
| *3 | 1-112-298-91 | o | CAP, CERAMIC 1MF B (1608) |
| C80 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C82 | 1-115-339-11 | s | CAPACITOR,CERAMIC 0.1MF/50V |
| C83 | 1-115-339-11 | s | CAPACITOR,CERAMIC 0.1MF/50V |
| C84 | 1-115-339-11 | s | CAPACITOR,CERAMIC 0.1MF/50V |
| C85 | 1-126-398-11 | s | CAPACITOR ELECT 4.7MF/35V(CHIP |
| C86 | 1-115-339-11 | s | CAPACITOR,CERAMIC 0.1MF/50V |
| C87 | 1-126-398-11 | s | CAPACITOR ELECT 4.7MF/35V(CHIP |
| C88 | 1-115-339-11 | s | CAPACITOR,CERAMIC 0.1MF/50V |
| C89 | 1-115-339-11 | s | CAPACITOR,CERAMIC 0.1MF/50V |
| C90 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C91 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C92 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C93 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C94 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C95 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C96 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C97 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C98 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C99 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| CN1 | 1-778-451-31 | s | CONNECTOR, FFC/FPC(ZIF) AN 50P (GOLD) |
| | 1-778-451-11 | o | CONNECTOR, FPC (50P) (SILVER) |
| CN2 | 1-764-441-51 | s | CONNECTOR, FPC 30P (GOLD) |
| | 1-764-441-21 | s | CONNECTOR, FPC (30P) (SILVER) |
| CN3 | 1-695-209-21 | s | PIN, CONNECTOR (PC BOARD) 15P |
| D1 | 8-719-043-70 | s | DIODE MA6S121-(TX) |
| D2 | 8-719-043-70 | s | DIODE MA6S121-(TX) |
| D3 | 8-719-043-70 | s | DIODE MA6S121-(TX) |

(DR-562 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description | |
|---|---|---|---|---|
| D4 | 8-719-043-70 | s | DIODE MA6S121-(TX) | |
| D5 | 8-719-043-70 | s | DIODE MA6S121-(TX) | |
| D6 | 8-719-210-43 | s | DIODE EC10QS06 | |
| D7 | 8-719-043-70 | s | DIODE MA6S121-(TX) | |
| D8 | 8-719-043-70 | s | DIODE MA6S121-(TX) | |
| D9 | 8-719-043-70 | s | DIODE MA6S121-(TX) | |
| D10 | 8-719-043-70 | s | DIODE MA6S121-(TX) | |
| D11 | 8-719-043-70 | s | DIODE MA6S121-(TX) | |
| D12 | 8-719-059-52 | s | DIODE MA3J14300LSO | |
| D13 | 8-719-059-52 | s | DIODE MA3J14300LSO | |
| D14 | 8-719-059-52 | s | DIODE MA3J14300LSO | |
| E1 | 1-535-877-22 | s | CHIP,CHECKER (TEST POINT) | |
| FB1 | 1-469-100-21 | s | FERRITE, EMI (SMD) | (1608) |
| FB2 | 1-469-100-21 | s | FERRITE, EMI (SMD) | (1608) |
| FB3 | 1-469-100-21 | s | FERRITE, EMI (SMD) | (1608) |
| FB4 | 1-469-100-21 | s | FERRITE, EMI (SMD) | (1608) |
| FB5 | 1-469-100-21 | s | FERRITE, EMI (SMD) | (1608) |
| FB6 | 1-469-100-21 | s | FERRITE, EMI (SMD) | (1608) |
| FB7 | 1-469-100-21 | s | FERRITE, EMI (SMD) | (1608) |
| FB8 | 1-469-100-21 | s | FERRITE, EMI (SMD) | (1608) |
| FB9 | 1-469-100-21 | s | FERRITE, EMI (SMD) | (1608) |
| FB10 | 1-469-100-21 | s | FERRITE, EMI (SMD) | (1608) |
| FB11 | 1-469-100-21 | s | FERRITE, EMI (SMD) | (1608) |
| FB12 | 1-469-100-21 | s | FERRITE, EMI (SMD) | (1608) |
| FB13 | 1-469-100-21 | s | FERRITE, EMI (SMD) | (1608) |
| FB14 | 1-469-100-21 | s | FERRITE, EMI (SMD) | (1608) |
| FB15 | 1-469-100-21 | s | FERRITE, EMI (SMD) | (1608) |
| FB16 | 1-469-100-21 | s | FERRITE, EMI (SMD) | (1608) |
| FB17 | 1-469-100-21 | s | FERRITE, EMI (SMD) | (1608) |
| FB18 | 1-469-100-21 | s | FERRITE, EMI (SMD) | (1608) |
| FB19 | 1-469-100-21 | s | FERRITE, EMI (SMD) | (1608) |
| FB20 | 1-469-100-21 | s | FERRITE, EMI (SMD) | (1608) |
| FB21 | 1-469-100-21 | s | FERRITE, EMI (SMD) | (1608) |
| FB22 | 1-469-100-21 | s | FERRITE, EMI (SMD) | (1608) |
| FB23 | 1-469-100-21 | s | FERRITE, EMI (SMD) | (1608) |
| FB24 | 1-469-100-21 | s | FERRITE, EMI (SMD) | (1608) |
| FB25 | 1-469-100-21 | s | FERRITE, EMI (SMD) | (1608) |
| FB26 | 1-469-100-21 | s | FERRITE, EMI (SMD) | (1608) |
| FB27 | 1-469-100-21 | s | FERRITE, EMI (SMD) | (1608) |
| FB28 | 1-469-100-21 | s | FERRITE, EMI (SMD) | (1608) |
| FB29 | 1-469-100-21 | s | FERRITE, EMI (SMD) | (1608) |
| FB30 | 1-469-100-21 | s | FERRITE, EMI (SMD) | (1608) |
| FB31 | 1-469-100-21 | s | FERRITE, EMI (SMD) | (1608) |
| FB32 | 1-469-100-21 | s | FERRITE, EMI (SMD) | (1608) |
| FB33 | 1-469-100-21 | s | FERRITE, EMI (SMD) | (1608) |
| FB34 | 1-469-100-21 | s | FERRITE, EMI (SMD) | (1608) |
| FB35 | 1-469-100-21 | s | FERRITE, EMI (SMD) | (1608) |
| FB36 | 1-469-100-21 | s | FERRITE, EMI (SMD) | (1608) |
| IC1 | 8-759-573-97 | s | IC SN74LVC541APWR | |
| IC2 | 8-759-573-97 | s | IC SN74LVC541APWR | |
| IC3 | 6-704-976-01 | s | IC ADR381ART-REEL7 | |
| IC4 | 8-759-573-97 | s | IC SN74LVC541APWR | |
| IC5 | 8-759-573-97 | s | IC SN74LVC541APWR | |
| IC6 | 8-759-573-97 | s | IC SN74LVC541APWR | |
| IC7 | 8-759-573-97 | s | IC SN74LVC541APWR | |
| IC8 | 8-759-685-33 | s | IC BU2500FV-E2 | |
| IC9 | 6-708-326-01 | s | IC TC74HCT4053AFT(EL) | |
| IC10 | 8-759-564-49 | s | IC TC7W53FU-TE12R | |

(DR-562 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| IC11 | 8-759-564-49 | s | IC TC7W53FU-TE12R |
| IC12 | 8-759-669-71 | s | IC PCF8591T/2 |
| IC13 | 8-759-327-01 | s | IC NJM062V-TE2 |
| IC14 | 8-759-381-53 | s | IC UPC814G2-E2 |
| IC15 | 8-759-327-01 | s | IC NJM062V-TE2 |
| IC16 | 8-759-327-01 | s | IC NJM062V-TE2 |
| IC17 | 8-759-327-01 | s | IC NJM062V-TE2 |
| IC18 | 6-708-326-01 | s | IC TC74HCT4053AFT(EL) |
| L1 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |
| L2 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |
| L3 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |
| L5 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |
| Q1 | 8-729-143-13 | s | TRANSISTOR 2SC4176-B34 |
| Q2 | 8-729-143-13 | s | TRANSISTOR 2SC4176-B34 |
| Q3 | 8-729-143-07 | s | TRANSISTOR 2SA1610-Y33 |
| Q4 | 8-729-230-27 | s | TRANSISTOR 2SA1213Y-TE12L |
| Q5 | 8-729-143-13 | s | TRANSISTOR 2SC4176-B34 |
| Q6 | 8-729-143-13 | s | TRANSISTOR 2SC4176-B34 |
| Q7 | 8-729-143-07 | s | TRANSISTOR 2SA1610-Y33 |
| Q8 | 8-729-053-11 | s | TRANSISTOR FDC6561AN |
| Q9 | 8-729-053-12 | s | TRANSISTOR FDC6506P |
| Q10 | 8-729-143-13 | s | TRANSISTOR 2SC4176-B34 |
| Q11 | 8-729-230-27 | s | TRANSISTOR 2SA1213Y-TE12L |
| Q12 | 8-729-053-12 | s | TRANSISTOR FDC6506P |
| Q13 | 8-729-053-12 | s | TRANSISTOR FDC6506P |
| Q14 | 8-729-053-12 | s | TRANSISTOR FDC6506P |
| Q15 | 8-729-053-12 | s | TRANSISTOR FDC6506P |
| Q16 | 8-729-053-12 | s | TRANSISTOR FDC6506P |
| Q17 | 8-729-053-12 | s | TRANSISTOR FDC6506P |
| Q18 | 8-729-053-12 | s | TRANSISTOR FDC6506P |
| Q19 | 8-729-230-27 | s | TRANSISTOR 2SA1213Y-TE12L |
| Q20 | 8-729-053-11 | s | TRANSISTOR FDC6561AN |
| Q21 | 8-729-053-11 | s | TRANSISTOR FDC6561AN |
| Q22 | 8-729-053-11 | s | TRANSISTOR FDC6561AN |
| Q23 | 8-729-053-11 | s | TRANSISTOR FDC6561AN |
| Q24 | 8-729-053-11 | s | TRANSISTOR FDC6561AN |
| Q25 | 8-729-053-11 | s | TRANSISTOR FDC6561AN |
| Q26 | 8-729-053-11 | s | TRANSISTOR FDC6561AN |
| Q27 | 8-729-143-13 | s | TRANSISTOR 2SC4176-B34 |
| Q28 | 8-729-230-27 | s | TRANSISTOR 2SA1213Y-TE12L |
| Q29 | 8-729-143-07 | s | TRANSISTOR 2SA1610-Y33 |
| Q30 | 8-729-049-93 | s | TRANSISTOR 2SD2098-T100R |
| Q31 | 8-729-143-13 | s | TRANSISTOR 2SC4176-B34 |
| Q32 | 8-729-143-07 | s | TRANSISTOR 2SA1610-Y33 |
| Q33 | 8-729-143-13 | s | TRANSISTOR 2SC4176-B34 |
| Q34 | 8-729-143-07 | s | TRANSISTOR 2SA1610-Y33 |
| Q35 | 8-729-143-13 | s | TRANSISTOR 2SC4176-B34 |
| Q36 | 8-729-143-07 | s | TRANSISTOR 2SA1610-Y33 |
| Q37 | 8-729-106-60 | s | TRANSISTOR 2SB1115A |
| Q38 | 8-729-421-71 | s | TRANSISTOR 2SK620 |
| Q39 | 8-729-117-32 | s | TRANSISTOR 2SC4177 |
| R1 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R2 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R3 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R4 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R5 | 1-208-703-11 | s | RESISTOR,CHIP 6.8K 1/16W(1005) |
| R6 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R7 | 1-208-893-11 | s | RESISTOR, CHIP 1.8K (1005) |

(DR-562 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R8 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R9 | 1-208-687-11 | s | RESISTOR CHIP 1.5K 1/16W (1005 |
| R10 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R11 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R12 | 1-208-893-11 | s | RESISTOR, CHIP 1.8K (1005) |
| R13 | 1-208-687-11 | s | RESISTOR CHIP 1.5K 1/16W (1005 |
| R14 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R15 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R16 *1,2 | 1-220-803-81 | s | RESISTOR,CHIP4.7 1/16W (1005) |
| *3 | 1-216-797-91 | s | RES, CHIP 10 (1608) |
| R17 | 1-208-709-11 | s | RESISTOR CHIP 12K 1/16W (1005) |
| R18 | 1-208-711-11 | s | RESISTOR CHIP 15K 1/16W (1005) |
| R19 *1,2 | 1-220-803-81 | s | RESISTOR,CHIP4.7 1/16W (1005) |
| *3 | 1-216-797-91 | s | RES, CHIP 10 (1608) |
| R20 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R21 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R22 | 1-208-905-11 | s | RESISTOR, CHIP 5.6K (1005) |
| R23 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R24 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R25 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R26 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R27 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R28 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R29 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R30 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R31 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R32 | 1-208-711-11 | s | RESISTOR CHIP 15K 1/16W (1005) |
| R33 | 1-218-958-11 | s | RESISTOR,CHIP 2.7K 1/16W(1005) |
| R34 | 1-208-873-11 | s | RESISTOR,CHIP 270 1/16W (1005) |
| R35 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R36 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R38 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R39 | 1-208-643-11 | s | RESISTOR CHIP 22 1/16W (1005) |
| R40 *1 | 1-218-939-11 | s | METAL CHIP 68 0.5% 1/16W |
| *2 | 1-218-945-11 | s | METAL CHIP 220 0.5% 1/16W |
| R41 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R42 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R43 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R44 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R45 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R46 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R47 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R48 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R49 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R50 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R51 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R52 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R53 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R54 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R55 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R56 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R57 | 1-208-711-11 | s | RESISTOR CHIP 15K 1/16W (1005) |
| R58 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R59 | 1-218-970-11 | s | RESISTOR CHIP 27K 1/16W (1005) |
| R60 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R61 | 1-208-691-11 | s | RESISTOR CHIP 2.2K 1/16W(1005) |
| R62 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R63 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R64 | 1-218-970-11 | s | RESISTOR CHIP 27K 1/16W (1005) |
| R65 | 1-208-691-11 | s | RESISTOR CHIP 2.2K 1/16W(1005) |

(DR-562 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R66 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R67 | 1-208-643-11 | s | RESISTOR CHIP 22 1/16W (1005) |
| R68 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R69 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R70 | 1-220-874-11 | s | RES, CHIP 15 (1005) |
| R71 | 1-220-874-11 | s | RES, CHIP 15 (1005) |
| R72 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R73 | 1-218-970-11 | s | RESISTOR CHIP 27K 1/16W (1005) |
| R74 | 1-208-905-11 | s | RESISTOR, CHIP 5.6K (1005) |
| R75 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R76 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R77 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R78 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R79 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R80 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R81 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R82 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R83 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R84 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R85 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R86 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R87 *3 | 1-216-797-91 | s | RES, CHIP 10 (1608) |
| R88 *3 | 1-216-797-91 | s | RES, CHIP 10 (1608) |
| R93 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R94 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R95 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R97 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R98 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R99 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R100 | 1-208-691-11 | s | RESISTOR CHIP 2.2K 1/16W(1005) |
| R101 | 1-218-606-11 | s | RESISTOR,CHIP 2.2/1W (6331) |
| R102 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R103 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| RB3 | 1-234-370-11 | s | RES, NETWORK 22X4 (1005) |
| RB4 | 1-234-370-11 | s | RES, NETWORK 22X4 (1005) |
| RB5 | 1-234-370-11 | s | RES, NETWORK 22X4 (1005) |
| RB6 | 1-234-381-21 | s | RES, NETWORK 100KX4 (1005) |
| RB7 | 1-234-381-21 | s | RES, NETWORK 100KX4 (1005) |
| RB8 | 1-234-381-21 | s | RES, NETWORK 100KX4 (1005) |
| RB9 | 1-234-381-21 | s | RES, NETWORK 100KX4 (1005) |
| RB10 | 1-234-381-21 | s | RES, NETWORK 100KX4 (1005) |
| RB11 | 1-234-381-21 | s | RES, NETWORK 100KX4 (1005) |

---
FL-337 BOARD
---

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| 1pc | A-1142-713-A | s | MOUNTED CIRCUIT BOARD, FL-337 |
| C1 ⚠ | 1-113-925-51 | s | CAP, CERAMIC 10000PF F |
| C2 ⚠ | 1-113-925-51 | s | CAP, CERAMIC 10000PF F |
| C3 ⚠ | 1-136-206-11 | s | CAP, METALIZED FILM 0.033MF |
| CN1 | 1-691-291-11 | o | PIN, CONNECTOR (PC BOARD) 5P |
| CN2 | 1-750-880-11 | s | RECEPTACLE, COAXIAL CONNECTOR |
| CN3 | 1-819-986-11 | s | PIN, CONNECTOR (PC BOARD) 3P |
| FB1 | 1-469-979-21 | s | INDUCTOR, FERRITE BEAD |
| FB2 | 1-469-979-21 | s | INDUCTOR, FERRITE BEAD |
| FB3 | 1-469-979-21 | s | INDUCTOR, FERRITE BEAD |
| L1 | 1-412-963-21 | s | INDUCTOR 100UH (2520) |
| L2 | 1-412-963-21 | s | INDUCTOR 100UH (2520) |

---
FL-338 BOARD
---

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| 1pc | A-1144-417-A | s | MOUNTED CIRCUIT BOARD, FL-338 |
| C1 ⚠ | 1-136-199-11 | s | CAP, METALIZED FILM 0.1MF |
| C2 ⚠ | 1-136-206-11 | s | CAP, METALIZED FILM 0.033MF |
| C3 ⚠ | 1-136-206-11 | s | CAP, METALIZED FILM 0.033MF |
| FB1 | 1-469-979-21 | s | INDUCTOR, FERRITE BEAD |
| FB2 | 1-469-979-21 | s | INDUCTOR, FERRITE BEAD |
| FB3 | 1-469-979-21 | s | INDUCTOR, FERRITE BEAD |
| FB4 | 1-469-979-21 | s | INDUCTOR, FERRITE BEAD |
| L1 | 1-416-831-11 | s | COIL, CHOKE 100UH |
| L2 | 1-416-831-11 | s | COIL, CHOKE 100UH |
| L3 | 1-416-831-11 | s | COIL, CHOKE 100UH |
| L4 | 1-416-831-11 | s | COIL, CHOKE 100UH |
| L5 | 1-416-831-11 | s | COIL, CHOKE 100UH |

---
LE-291 BOARD
---

*1: [Board No. suffix 11,31]
*2: [Board No. suffix 12,32]

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| 1pc | A-1126-981-A | s | MOUNTED CIRCUIT BOARD, LE-291 |
| C2 | 1-107-420-11 | s | CAPACITOR,ELECT 47MF/35V(105C) |
| C4 *1 | 1-128-414-11 | s | CAPACITOR ELECT 220MF/6.3V |
| *2 | 1-100-588-21 | s | CAPACITOR ELECT 1000MF/6.3V |
| C5 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C6 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C7 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C8 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C9 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C10 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C11 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C12 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C13 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C14 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C15 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C16 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C17 | 1-126-399-11 | s | CAPACITOR ELECT 10MF/35V(CHIP) |
| C18 | 1-126-399-11 | s | CAPACITOR ELECT 10MF/35V(CHIP) |
| C19 | 1-100-352-91 | s | CAP, CHIP CERAMIC 1MF B (1608) |
| CN1 | 1-784-254-11 | s | CONNECTOR 10P |
| D1 | 8-719-820-41 | s | DIODE 1SS302 |
| D2 | 8-719-989-53 | s | LED CL-200HR-C-TSL |
| D3 | 8-719-989-53 | s | LED CL-200HR-C-TSL |
| D4 | 8-719-989-53 | s | LED CL-200HR-C-TSL |
| D5 | 8-719-989-53 | s | LED CL-200HR-C-TSL |
| D6 | 8-719-989-53 | s | LED CL-200HR-C-TSL |
| D7 | 8-719-989-53 | s | LED CL-200HR-C-TSL |
| D8 | 8-719-989-53 | s | LED CL-200HR-C-TSL |
| D9 | 8-719-989-53 | s | LED CL-200HR-C-TSL |
| D10 | 8-719-989-53 | s | LED CL-200HR-C-TSL |
| D11 | 8-719-989-53 | s | LED CL-200HR-C-TSL |
| D12 | 8-719-989-53 | s | LED CL-200HR-C-TSL |
| D13 | 8-719-989-53 | s | LED CL-200HR-C-TSL |
| D14 | 8-719-989-53 | s | LED CL-200HR-C-TSL |
| D15 | 8-719-989-53 | s | LED CL-200HR-C-TSL |
| D16 | 8-719-989-53 | s | LED CL-200HR-C-TSL |
| D17 | 8-719-989-53 | s | LED CL-200HR-C-TSL |
| D18 | 8-719-989-53 | s | LED CL-200HR-C-TSL |
| D19 | 8-719-989-53 | s | LED CL-200HR-C-TSL |
| D20 | 8-719-989-53 | s | LED CL-200HR-C-TSL |
| D21 | 8-719-989-53 | s | LED CL-200HR-C-TSL |
| D22 | 8-719-989-53 | s | LED CL-200HR-C-TSL |
| D23 | 8-719-989-53 | s | LED CL-200HR-C-TSL |
| D24 | 8-719-989-53 | s | LED CL-200HR-C-TSL |
| D25 | 8-719-989-53 | s | LED CL-200HR-C-TSL |
| D26 | 8-719-989-53 | s | LED CL-200HR-C-TSL |
| D27 | 8-719-989-53 | s | LED CL-200HR-C-TSL |
| D28 | 8-719-989-53 | s | LED CL-200HR-C-TSL |
| D29 | 8-719-989-53 | s | LED CL-200HR-C-TSL |
| D30 | 8-719-989-53 | s | LED CL-200HR-C-TSL |
| D31 | 8-719-989-53 | s | LED CL-200HR-C-TSL |
| D32 | 8-719-989-53 | s | LED CL-200HR-C-TSL |
| D33 | 8-719-989-53 | s | LED CL-200HR-C-TSL |
| D34 | 8-719-989-53 | s | LED CL-200HR-C-TSL |
| D35 | 8-719-989-53 | s | LED CL-200HR-C-TSL |
| D36 | 8-719-989-53 | s | LED CL-200HR-C-TSL |
| D37 | 8-719-989-53 | s | LED CL-200HR-C-TSL |

(LE-291 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| D38 | 8-719-989-53 | s | LED CL-200HR-C-TSL |
| D39 | 8-719-989-53 | s | LED CL-200HR-C-TSL |
| D40 | 8-719-989-53 | s | LED CL-200HR-C-TSL |
| D41 | 8-719-989-53 | s | LED CL-200HR-C-TSL |
| D42 | 8-719-989-53 | s | LED CL-200HR-C-TSL |
| D43 | 8-719-989-53 | s | LED CL-200HR-C-TSL |
| D44 | 8-719-989-53 | s | LED CL-200HR-C-TSL |
| D45 | 8-719-989-53 | s | LED CL-200HR-C-TSL |
| D46 | 8-719-989-53 | s | LED CL-200HR-C-TSL |
| D47 | 8-719-989-53 | s | LED CL-200HR-C-TSL |
| D48 | 8-719-989-53 | s | LED CL-200HR-C-TSL |
| D49 | 8-719-989-53 | s | LED CL-200HR-C-TSL |
| D50 | 8-719-989-53 | s | LED CL-200HR-C-TSL |
| D51 | 8-719-989-53 | s | LED CL-200HR-C-TSL |
| D52 | 8-719-989-53 | s | LED CL-200HR-C-TSL |
| D53 | 8-719-989-53 | s | LED CL-200HR-C-TSL |
| D54 | 8-719-989-53 | s | LED CL-200HR-C-TSL |
| D55 | 8-719-989-53 | s | LED CL-200HR-C-TSL |
| D56 | 8-719-989-53 | s | LED CL-200HR-C-TSL |
| D57 | 8-719-989-53 | s | LED CL-200HR-C-TSL |
| D58 | 8-719-989-53 | s | LED CL-200HR-C-TSL |
| D59 | 8-719-989-53 | s | LED CL-200HR-C-TSL |
| D60 | 8-719-989-53 | s | LED CL-200HR-C-TSL |
| D61 | 8-719-989-53 | s | LED CL-200HR-C-TSL |
| IC1 | 8-759-529-76 | s | IC TC74VHC595FT(EL) |
| IC2 | 8-759-529-76 | s | IC TC74VHC595FT(EL) |
| IC3 | 8-759-529-76 | s | IC TC74VHC595FT(EL) |
| IC4 | 8-759-529-76 | s | IC TC74VHC595FT(EL) |
| L1 | 1-416-510-21 | s | COIL, CHOKE 100UH |
| L2 *1 | 1-424-700-21 | s | COIL, CHOKE (SMD) 100UH |
| Q1 | 8-729-928-55 | s | TRANSISTOR DTA123JE-TL |
| Q2 | 8-729-928-55 | s | TRANSISTOR DTA123JE-TL |
| Q3 | 8-729-928-55 | s | TRANSISTOR DTA123JE-TL |
| Q4 | 8-729-928-55 | s | TRANSISTOR DTA123JE-TL |
| Q5 | 8-729-928-55 | s | TRANSISTOR DTA123JE-TL |
| Q6 | 8-729-928-55 | s | TRANSISTOR DTA123JE-TL |
| Q7 | 8-729-928-55 | s | TRANSISTOR DTA123JE-TL |
| Q8 | 8-729-928-55 | s | TRANSISTOR DTA123JE-TL |
| Q9 | 8-729-928-55 | s | TRANSISTOR DTA123JE-TL |
| Q10 | 8-729-928-55 | s | TRANSISTOR DTA123JE-TL |
| Q11 | 8-729-928-55 | s | TRANSISTOR DTA123JE-TL |
| Q12 | 8-729-928-55 | s | TRANSISTOR DTA123JE-TL |
| Q13 | 8-729-928-55 | s | TRANSISTOR DTA123JE-TL |
| Q14 | 8-729-928-55 | s | TRANSISTOR DTA123JE-TL |
| Q15 | 8-729-928-55 | s | TRANSISTOR DTA123JE-TL |
| Q16 | 8-729-928-55 | s | TRANSISTOR DTA123JE-TL |
| Q17 | 8-729-928-55 | s | TRANSISTOR DTA123JE-TL |
| Q18 | 8-729-928-55 | s | TRANSISTOR DTA123JE-TL |
| Q19 | 8-729-928-55 | s | TRANSISTOR DTA123JE-TL |
| Q20 | 8-729-928-55 | s | TRANSISTOR DTA123JE-TL |
| Q21 | 8-729-928-55 | s | TRANSISTOR DTA123JE-TL |
| Q22 | 8-729-928-55 | s | TRANSISTOR DTA123JE-TL |
| Q23 | 8-729-928-55 | s | TRANSISTOR DTA123JE-TL |
| Q24 | 8-729-928-55 | s | TRANSISTOR DTA123JE-TL |
| Q25 | 8-729-928-55 | s | TRANSISTOR DTA123JE-TL |
| Q26 | 8-729-928-55 | s | TRANSISTOR DTA123JE-TL |
| Q27 | 8-729-928-55 | s | TRANSISTOR DTA123JE-TL |
| Q28 | 8-729-928-55 | s | TRANSISTOR DTA123JE-TL |
| Q29 | 8-729-928-55 | s | TRANSISTOR DTA123JE-TL |

(LE-291 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| Q30 | 8-729-928-55 | s | TRANSISTOR DTA123JE-TL |
| Q31 | 8-729-928-55 | s | TRANSISTOR DTA123JE-TL |
| Q32 | 8-729-928-55 | s | TRANSISTOR DTA123JE-TL |
| Q33 | 8-729-807-51 | s | TRANSISTOR 2SD1623-S |
| Q34 | 8-729-807-51 | s | TRANSISTOR 2SD1623-S |
| Q35 | 8-729-807-51 | s | TRANSISTOR 2SD1623-S |
| Q36 | 8-729-807-51 | s | TRANSISTOR 2SD1623-S |
| Q37 | 8-729-807-51 | s | TRANSISTOR 2SD1623-S |
| Q38 | 8-729-807-51 | s | TRANSISTOR 2SD1623-S |
| Q39 | 8-729-807-51 | s | TRANSISTOR 2SD1623-S |
| Q40 | 8-729-807-51 | s | TRANSISTOR 2SD1623-S |
| Q41 | 8-729-807-51 | s | TRANSISTOR 2SD1623-S |
| Q42 | 8-729-807-51 | s | TRANSISTOR 2SD1623-S |
| Q43 | 8-729-807-51 | s | TRANSISTOR 2SD1623-S |
| Q44 | 8-729-807-51 | s | TRANSISTOR 2SD1623-S |
| Q45 | 8-729-807-51 | s | TRANSISTOR 2SD1623-S |
| Q46 | 8-729-807-51 | s | TRANSISTOR 2SD1623-S |
| Q47 | 8-729-807-51 | s | TRANSISTOR 2SD1623-S |
| Q48 | 8-729-807-51 | s | TRANSISTOR 2SD1623-S |
| Q49 | 8-729-807-51 | s | TRANSISTOR 2SD1623-S |
| Q50 | 8-729-807-51 | s | TRANSISTOR 2SD1623-S |
| Q51 | 8-729-807-51 | s | TRANSISTOR 2SD1623-S |
| Q52 | 8-729-807-51 | s | TRANSISTOR 2SD1623-S |
| Q53 | 8-729-807-51 | s | TRANSISTOR 2SD1623-S |
| Q54 | 8-729-807-51 | s | TRANSISTOR 2SD1623-S |
| Q55 | 8-729-807-51 | s | TRANSISTOR 2SD1623-S |
| Q56 | 8-729-807-51 | s | TRANSISTOR 2SD1623-S |
| Q57 | 8-729-807-51 | s | TRANSISTOR 2SD1623-S |
| Q58 | 8-729-807-51 | s | TRANSISTOR 2SD1623-S |
| Q59 | 8-729-807-51 | s | TRANSISTOR 2SD1623-S |
| Q60 | 8-729-807-51 | s | TRANSISTOR 2SD1623-S |
| Q61 | 8-729-927-99 | s | TRANSISTOR 2SC4617R |
| Q62 | 8-729-928-81 | s | TRANSISTOR DTC144EE |
| Q63 | 8-729-928-81 | s | TRANSISTOR DTC144EE |
| R1 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R2 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R3 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R4 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R5 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R6 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R7 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R8 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R9 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R10 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R11 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R12 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R13 | 1-211-977-11 | s | RESISTOR,CHIP 22 1/10W (1608) |
| R14 | 1-211-977-11 | s | RESISTOR,CHIP 22 1/10W (1608) |
| R15 | 1-211-977-11 | s | RESISTOR,CHIP 22 1/10W (1608) |
| R16 | 1-211-977-11 | s | RESISTOR,CHIP 22 1/10W (1608) |
| R17 | 1-211-977-11 | s | RESISTOR,CHIP 22 1/10W (1608) |
| R18 | 1-211-977-11 | s | RESISTOR,CHIP 22 1/10W (1608) |
| R19 | 1-211-977-11 | s | RESISTOR,CHIP 22 1/10W (1608) |
| R20 | 1-211-977-11 | s | RESISTOR,CHIP 22 1/10W (1608) |
| R21 | 1-211-977-11 | s | RESISTOR,CHIP 22 1/10W (1608) |
| R22 | 1-211-977-11 | s | RESISTOR,CHIP 22 1/10W (1608) |
| R23 | 1-211-977-11 | s | RESISTOR,CHIP 22 1/10W (1608) |
| R24 | 1-211-977-11 | s | RESISTOR,CHIP 22 1/10W (1608) |
| R25 | 1-211-977-11 | s | RESISTOR,CHIP 22 1/10W (1608) |

(LE-291 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R26 | 1-211-977-11 | s | RESISTOR,CHIP 22 1/10W (1608) |
| R27 | 1-211-977-11 | s | RESISTOR,CHIP 22 1/10W (1608) |
| R28 | 1-211-977-11 | s | RESISTOR,CHIP 22 1/10W (1608) |
| R29 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R30 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R31 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R32 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R33 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R34 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R35 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R36 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R37 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R38 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R39 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R40 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R41 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R42 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R43 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R44 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R45 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R46 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R47 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R48 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R49 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R50 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R51 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R52 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R53 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R54 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R55 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R56 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R57 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R58 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R59 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R60 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R61 | 1-218-939-11 | s | RESISTOR, CHIP 68 1/16W (1005) |
| R62 | 1-218-939-11 | s | RESISTOR, CHIP 68 1/16W (1005) |
| R63 | 1-218-939-11 | s | RESISTOR, CHIP 68 1/16W (1005) |
| R64 | 1-218-939-11 | s | RESISTOR, CHIP 68 1/16W (1005) |
| R65 | 1-218-939-11 | s | RESISTOR, CHIP 68 1/16W (1005) |
| R66 | 1-218-939-11 | s | RESISTOR, CHIP 68 1/16W (1005) |
| R67 | 1-218-939-11 | s | RESISTOR, CHIP 68 1/16W (1005) |
| R68 | 1-218-939-11 | s | RESISTOR, CHIP 68 1/16W (1005) |
| R69 | 1-218-939-11 | s | RESISTOR, CHIP 68 1/16W (1005) |
| R70 | 1-218-939-11 | s | RESISTOR, CHIP 68 1/16W (1005) |
| R71 | 1-218-939-11 | s | RESISTOR, CHIP 68 1/16W (1005) |
| R72 | 1-218-939-11 | s | RESISTOR, CHIP 68 1/16W (1005) |
| R73 | 1-218-236-91 | s | RESISTOR,CHIP 1 1/4W |
| R74 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R75 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R76 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R77 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R78 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| *2 R79 | 1-218-606-91 | s | RESISTOR, CHIP 2.2 1W |

## LE-308 BOARD

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C1 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| CN1 | 1-770-622-21 | s | PIN, CONNECTOR 5P |
| D1 | 6-500-122-01 | s | DIODE CL-375HR1YG-D-T |
| D2 | 6-500-122-01 | s | DIODE CL-375HR1YG-D-T |
| D4 | 6-501-212-01 | s | DIODE CL-221Y-C-TS |
| Q1 | 8-729-928-81 | s | TRANSISTOR DTC144EE |
| Q2 | 8-729-928-81 | s | TRANSISTOR DTC144EE |
| Q3 | 8-729-928-81 | s | TRANSISTOR DTC144EE |
| Q4 | 8-729-928-81 | s | TRANSISTOR DTC144EE |
| Q5 | 8-729-928-81 | s | TRANSISTOR DTC144EE |
| Q6 | 8-729-928-81 | s | TRANSISTOR DTC144EE |
| R1 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R2 | 1-208-675-11 | s | RESISTOR CHIP 470 1/16W (1005) |
| R3 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R4 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R5 | 1-208-675-11 | s | RESISTOR CHIP 470 1/16W (1005) |
| R6 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R7 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R8 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R10 | 1-216-864-11 | s | CONDUCTOR, CHIP (1608) |
| S1 | 1-692-530-11 | s | SWITCH,TOGGLE |

## LE-309 BOARD

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| 1pc | A-1126-982-A | s | MOUNTED CIRCUIT BOARD, LE-309 |
| D1 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D2 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D3 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D4 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D5 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D6 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D7 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D8 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D9 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D10 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D11 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D12 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D13 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D14 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D15 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D16 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D17 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D18 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D19 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D20 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D21 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D22 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D23 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D24 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D25 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D26 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D27 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D28 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D29 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D30 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D31 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D32 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D33 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D34 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D35 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D36 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D37 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D38 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D39 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D40 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D41 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D42 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D43 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D44 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D45 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D46 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D47 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D48 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D49 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D50 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D51 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D52 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D53 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D54 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D55 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D56 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D57 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |

(LE-309 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| D58 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D59 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D60 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D61 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D62 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D63 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D64 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D65 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D66 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D67 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D68 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D69 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D70 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D71 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D72 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D73 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D74 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D75 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D76 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D77 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D78 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D79 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D80 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D81 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D82 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D83 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D84 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D85 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D86 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D87 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D88 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D89 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D90 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D91 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D92 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D93 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D94 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D95 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D96 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D97 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D98 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D99 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D100 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D101 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D102 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D103 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D104 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D105 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D106 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D107 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D108 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D109 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D110 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D111 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D112 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D113 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D114 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D115 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D116 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |

(LE-309 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| D117 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D118 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D119 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D120 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D121 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D122 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D123 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D124 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D125 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D126 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D127 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D128 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D129 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D130 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D131 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D132 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D133 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D134 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D135 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D136 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D137 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D138 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D139 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D140 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D141 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D142 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D143 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D144 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D145 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D146 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D147 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D148 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D149 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D150 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D151 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D152 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D153 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D154 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D155 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D156 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D157 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D158 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D159 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D160 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D161 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D162 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D163 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D164 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D165 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D166 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D167 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D168 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D169 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D170 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D171 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D172 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D173 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D174 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D175 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |

(LE-309 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| D176 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D177 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D178 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D179 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D180 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D181 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D182 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D183 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D184 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D185 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D186 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D187 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D188 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D189 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D190 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D191 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D192 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D193 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D194 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D195 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D196 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D197 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D198 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D199 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D200 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D201 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D202 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D203 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D204 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D205 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D206 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D207 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D208 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D209 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D210 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D211 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D212 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D213 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D214 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D215 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D216 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D217 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D218 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D219 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D220 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D221 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D222 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D223 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D224 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D225 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D226 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D227 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D228 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D229 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D230 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D231 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D232 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D233 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D234 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |

(LE-309 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| D235 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D236 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D237 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D238 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D239 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D240 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D241 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D242 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D243 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D244 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D245 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D246 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D247 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D248 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D249 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D250 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D251 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D252 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D253 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D254 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D255 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |
| D256 | 6-501-355-01 | s | DIODE CL-197TD2-CD-T |

## MB-1059 BOARD (HDC1500/1550/1580/1600)

*1: [Board No. suffix 14]
*2: [Board No. suffix 15]
*3: [Board No. suffix 21-]

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| 1pc | A-1159-988-A | s | MOUNTED CIRCUIT BOARD,MB-1059G (GOLD) |
| | A-1101-928-A | s | MOUNTED CIRCUIT BOARD, MB-1059 (SILVER) |
| 18pcs | 3-729-061-01 | s | SCREW (M2X4.5) (TYPE 1)(STEEL) |
| C1 | 1-135-960-91 | s | CAP, CHIP CERAMIC 10MF B(3225) |
| C2 | 1-135-960-91 | s | CAP, CHIP CERAMIC 10MF B(3225) |
| C3 | 1-135-960-91 | s | CAP, CHIP CERAMIC 10MF B(3225) |
| C5 | 1-135-960-91 | s | CAP, CHIP CERAMIC 10MF B(3225) |
| C6 | 1-135-960-91 | s | CAP, CHIP CERAMIC 10MF B(3225) |
| C7 | 1-135-960-91 | s | CAP, CHIP CERAMIC 10MF B(3225) |
| C8 | 1-135-960-91 | s | CAP, CHIP CERAMIC 10MF B(3225) |
| C9 | 1-135-960-91 | s | CAP, CHIP CERAMIC 10MF B(3225) |
| C10 | 1-135-960-91 | s | CAP, CHIP CERAMIC 10MF B(3225) |
| C11 | 1-135-960-91 | s | CAP, CHIP CERAMIC 10MF B(3225) |
| C12 | 1-135-960-91 | s | CAP, CHIP CERAMIC 10MF B(3225) |
| C13 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C14 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C15 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C16 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C17 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C18 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C19 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C20 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C21 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C22 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C23 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C24 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C25 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C26 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C27 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C28 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C29 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C30 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C31 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C32 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C33 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C34 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C35 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C36 *2 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| CN1 | 1-817-325-21 | s | PIN, CONNECTOR 20P |
| CN3 | 1-816-113-21 | s | CONNECTOR 15P |
| CN4 | 1-691-550-11 | s | PIN,CONNECTOR (3P)(SMD)(1.5MM) |
| CN5 | 1-695-479-11 | o | PIN, CONNECTOR (PC BOARD) 2P |
| CN6 | 1-778-965-21 | s | PIN, CONNECTOR (PC BOARD) 12P |
| CN7 | 1-817-318-21 | s | PIN, CONNECTOR 6P |
| CN11 | 1-794-142-31 | s | CONNECTOR, FFC/FPC(ZIF) AN 36P (GOLD) |
| | 1-794-142-11 | o | CONNECTOR, FFC (ZIF) 36P (SILVER) |
| CN12 | 1-779-522-31 | s | CONNECTOR, FFC/FPC(ZIF) AN 40P (GOLD) |
| CN13 | 1-794-142-31 | s | CONNECTOR, FFC/FPC(ZIF) AN 36P (GOLD) |
| | 1-794-142-11 | o | CONNECTOR, FFC (ZIF) 36P (SILVER) |
| CN14 | 1-815-875-21 | s | PIN, CONNECTOR (PC BOARD)(12P) |

## (MB-1059 BOARD (HDC1500/1550/1580/1600))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| CN15 | 1-764-081-21 | s | PIN, CONNECTOR (PC BOARD) 9P |
| CN16 | 1-770-469-21 | o | PIN, CONNECTOR (PC BOARD) 2P |
| CN17 | 1-819-577-21 | s | PIN, CONNECTOR (PC BOARD) 15P |
| CN18 | 1-691-550-11 | s | PIN,CONNECTOR (3P)(SMD)(1.5MM) |
| CN19 *1 | 1-764-079-21 | s | PIN, CONNECTOR (PC BOARD) 4P |
| CN20 *2 | 1-580-789-21 | o | PIN, CONNECTOR (SMD) 6P |
| JC1 *3 | 1-218-990-81 | s | SHORT CHIP 0 |
| JC2 *3 | 1-218-990-81 | s | SHORT CHIP 0 |
| JC3 *3 | 1-218-990-81 | s | SHORT CHIP 0 |
| JC4 *3 | 1-218-990-81 | s | SHORT CHIP 0 |
| JC5 *3 | 1-218-990-81 | s | SHORT CHIP 0 |
| JC6 *3 | 1-218-990-81 | s | SHORT CHIP 0 |
| L1 | 1-416-344-11 | s | COIL, CHOKE 10UH |
| L2 | 1-416-948-21 | s | COIL, CHOKE (SMD) |
| L3 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L4 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L5 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L6 | 1-416-344-11 | s | COIL, CHOKE 10UH |
| L7 | 1-416-344-11 | s | COIL, CHOKE 10UH |
| L8 | 1-416-344-11 | s | COIL, CHOKE 10UH |
| L9 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |
| L10 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |
| L11 | 1-416-344-11 | s | COIL, CHOKE 10UH |
| L12 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |
| L13 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |
| L14 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |
| L15 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |
| L16 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |
| L17 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |
| L18 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |
| L19 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |
| L20 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |
| L21 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |
| L22 | 1-416-344-11 | s | COIL, CHOKE 10UH |
| L23 | 1-416-948-21 | s | COIL, CHOKE (SMD) |
| L24 | 1-416-948-21 | s | COIL, CHOKE (SMD) |
| L25 | 1-416-948-21 | s | COIL, CHOKE (SMD) |
| L26 | 1-416-344-11 | s | COIL, CHOKE 10UH |
| L27 | 1-416-344-11 | s | COIL, CHOKE 10UH |
| L28 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |
| L29 | 1-416-344-11 | s | COIL, CHOKE 10UH |
| L30 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L31 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| THP1 ⚠ | 1-803-615-11 | s | THERMISTOR, POSITIVE |
| THP2 ⚠ | 1-803-615-11 | s | THERMISTOR, POSITIVE |
| THP3 ⚠ | 1-803-615-11 | s | THERMISTOR, POSITIVE |
| THP5 ⚠ | 1-803-615-11 | s | THERMISTOR, POSITIVE |
| THP6 *1⚠ | 1-803-615-21 | s | THERMISTOR, POSITIVE |
| THP7 ⚠ | 1-804-987-21 | s | THERMISTOR, POSITIVE |
| THP8 ⚠ | 1-803-615-11 | s | THERMISTOR, POSITIVE |
| THP9 ⚠ | 1-803-615-11 | s | THERMISTOR, POSITIVE |
| THP11 ⚠ | 1-803-615-11 | s | THERMISTOR, POSITIVE |
| THP12 ⚠ | 1-803-615-11 | s | THERMISTOR, POSITIVE |
| THP13 ⚠ | 1-803-615-11 | s | THERMISTOR, POSITIVE |
| THP14 ⚠ | 1-804-987-21 | s | THERMISTOR, POSITIVE |
| THP15 ⚠ | 1-804-987-21 | s | THERMISTOR, POSITIVE |
| THP16 ⚠ | 1-804-987-21 | s | THERMISTOR, POSITIVE |
| THP17 ⚠ | 1-804-987-21 | s | THERMISTOR, POSITIVE |

MB-1059GA BOARD (HDC1400/1450/1500/1550/1580/1600)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| 1pc | ⚠ A-1251-714-A | s | MOUNTED CIRCUIT BOARD, MB-1059GA |
| 15pcs | 3-729-061-02 | s | SCREW (M2) (TYPE 1) |
| C1 | 1-135-960-91 | s | CAP, CHIP CERAMIC 10MF B(3225) |
| C2 | 1-135-960-91 | s | CAP, CHIP CERAMIC 10MF B(3225) |
| C3 | 1-135-960-91 | s | CAP, CHIP CERAMIC 10MF B(3225) |
| C5 | 1-135-960-91 | s | CAP, CHIP CERAMIC 10MF B(3225) |
| C6 | 1-135-960-91 | s | CAP, CHIP CERAMIC 10MF B(3225) |
| C7 | 1-135-960-91 | s | CAP, CHIP CERAMIC 10MF B(3225) |
| C8 | 1-135-960-91 | s | CAP, CHIP CERAMIC 10MF B(3225) |
| C9 | 1-135-960-91 | s | CAP, CHIP CERAMIC 10MF B(3225) |
| C10 | 1-135-960-91 | s | CAP, CHIP CERAMIC 10MF B(3225) |
| C11 | 1-135-960-91 | s | CAP, CHIP CERAMIC 10MF B(3225) |
| C12 | 1-135-960-91 | s | CAP, CHIP CERAMIC 10MF B(3225) |
| C13 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C14 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C15 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C16 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C17 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C18 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C19 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C20 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C21 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C22 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C23 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C24 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C25 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C26 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C27 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C28 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C29 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C30 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C31 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C32 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C33 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C34 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C35 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C36 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C37 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C38 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| CN1 | 1-817-325-21 | s | PIN, CONNECTOR 20P |
| CN3 | 1-816-113-21 | s | CONNECTOR 15P |
| CN4 | 1-691-550-21 | s | PIN, CONNECTOR (1.5MM)(SMD) 3P |
| CN5 | 1-695-479-21 | o | PIN, CONNECTOR (PC BOARD) 2P |
| CN6 | 1-778-965-21 | s | CONNECTOR 12P |
| CN7 | 1-817-318-21 | s | PIN, CONNECTOR 6P |
| CN11 | 1-794-142-31 | s | CONNECTOR, FFC/FPC(ZIF) AN 36P |
| CN12 | 1-779-522-31 | s | CONNECTOR, FFC/FPC(ZIF) AN 40P |
| CN13 | 1-794-142-31 | s | CONNECTOR, FFC/FPC(ZIF) AN 36P |
| CN14 | 1-815-875-21 | s | PIN, CONNECTOR (PC BOARD)(12P) |
| CN15 | 1-764-081-21 | s | PIN, CONNECTOR (PC BOARD) 9P |
| CN16 | 1-770-469-21 | s | PIN, CONNECTOR (PC BOARD) 2P |
| CN17 | 1-819-577-21 | s | PIN, CONNECTOR (PC BOARD) 15P |
| CN18 | 1-691-550-21 | s | PIN, CONNECTOR (1.5MM)(SMD) 3P |
| CN20 | 1-580-789-21 | o | PIN, CONNECTOR (SMD) 6P |
| CN21 | 1-817-318-21 | s | PIN, CONNECTOR 6P |
| L1 | 1-416-344-21 | s | COIL, CHOKE 10UH |
| L2 | 1-416-948-21 | s | COIL, CHOKE 10UH |

(MB-1059GA BOARD (HDC1400/1450/1500/1550/1580/1600))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| L3 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L4 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L5 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L6 | 1-416-344-21 | s | COIL, CHOKE 10UH |
| L7 | 1-416-344-21 | s | COIL, CHOKE 10UH |
| L8 | 1-416-344-21 | s | COIL, CHOKE 10UH |
| L9 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L10 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L11 | 1-416-344-21 | s | COIL, CHOKE 10UH |
| L12 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L13 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L14 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L15 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L16 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L17 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L18 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L19 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L20 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L21 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L22 | 1-416-344-21 | s | COIL, CHOKE 10UH |
| L23 | 1-416-948-21 | s | COIL, CHOKE 10UH |
| L24 | 1-416-948-21 | s | COIL, CHOKE 10UH |
| L25 | 1-416-948-21 | s | COIL, CHOKE 10UH |
| L26 | 1-416-344-21 | s | COIL, CHOKE 10UH |
| L27 | 1-416-344-21 | s | COIL, CHOKE 10UH |
| L28 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L29 | 1-416-344-21 | s | COIL, CHOKE 10UH |
| L30 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L31 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| THP1 | ⚠ 1-803-615-21 | s | THERMISTOR, POSITIVE |
| THP2 | ⚠ 1-803-615-21 | s | THERMISTOR, POSITIVE |
| THP3 | ⚠ 1-803-615-21 | s | THERMISTOR, POSITIVE |
| THP5 | ⚠ 1-803-615-21 | s | THERMISTOR, POSITIVE |
| THP7 | ⚠ 1-804-987-21 | s | THERMISTOR, POSITIVE |
| THP8 | ⚠ 1-803-615-21 | s | THERMISTOR, POSITIVE |
| THP9 | ⚠ 1-803-615-21 | s | THERMISTOR, POSITIVE |
| THP11 | ⚠ 1-803-615-21 | s | THERMISTOR, POSITIVE |
| THP12 | ⚠ 1-803-615-21 | s | THERMISTOR, POSITIVE |
| THP13 | ⚠ 1-803-615-21 | s | THERMISTOR, POSITIVE |
| THP14 | ⚠ 1-804-987-21 | s | THERMISTOR, POSITIVE |
| THP15 | ⚠ 1-804-987-21 | s | THERMISTOR, POSITIVE |
| THP16 | ⚠ 1-804-987-21 | s | THERMISTOR, POSITIVE |
| THP17 | ⚠ 1-804-987-21 | s | THERMISTOR, POSITIVE |

---
MB-1060 BOARD
---

*1: [Board No. suffix 12]
*2: [Board No. suffix 21-]

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| 1pc | A-1166-187-A | s | MOUNTED CIRCUIT BOARD,MB-1060G (GOLD) |
| | A-1124-080-A | s | MOUNTED CIRCUIT BOARD, MB-1060 (SILVER) |
| 15pcs | 3-729-061-01 | s | SCREW (M2X4.5) (TYPE 1)(STEEL) |
| C1 | 1-135-960-91 | s | CAP, CHIP CERAMIC 10MF B(3225) |
| C2 | 1-135-960-91 | s | CAP, CHIP CERAMIC 10MF B(3225) |
| C3 | 1-135-960-91 | s | CAP, CHIP CERAMIC 10MF B(3225) |
| C4 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C5 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C6 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C7 | 1-107-420-11 | s | CAPACITOR,ELECT 47MF/35V(105C) |
| C8 | 1-107-420-11 | s | CAPACITOR,ELECT 47MF/35V(105C) |
| C9 | 1-107-420-11 | s | CAPACITOR,ELECT 47MF/35V(105C) |
| C10 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| CN1 | 1-695-480-21 | o | PIN, CONNECTOR (PC BOARD) 2P |
| CN2 | 1-691-550-11 | s | PIN,CONNECTOR (3P)(SMD)(1.5MM) |
| CN3 | 1-784-254-11 | s | CONNECTOR 10P |
| CN4 | 1-778-552-11 | o | PIN, CONNECTOR 30P |
| CN5 *1 | 1-784-254-21 | s | CONNECTOR 10P |
| *2 | 1-778-965-21 | s | CONNECTOR 12P |
| CN6 | 1-778-650-11 | o | CONNECTOR, FFC (ZIF) 30P (SILVER) |
| CN7 | 1-764-087-21 | s | PIN, CONNECTOR (PC BOARD) 14P |
| CN9 | 1-779-806-21 | s | CONNECTOR, 1.0MM PITCH 8P |
| CN10 | 1-816-587-11 | s | PIN, CONNECTOR (PC BOARD) 15P |
| CN11 | 1-817-325-21 | s | PIN, CONNECTOR 20P |
| CN13 | 1-580-541-11 | s | PIN, CONNECTOR (PC BOARD) 24P |
| CN14 | 1-815-954-21 | s | PIN, CONNECTOR (PC BOARD) 13P |
| CN15 | 1-816-113-21 | s | CONNECTOR 15P |
| CN16 | 1-784-254-11 | s | CONNECTOR 10P |
| CN17 | 1-580-544-11 | s | PIN, CONNECTOR (PC BOARD) 30P |
| CN27 | 1-778-552-11 | o | PIN, CONNECTOR 30P |
| CN28 | 1-764-243-11 | o | CONNECTOR (COAXIAL) |
| CN29 | 1-764-243-11 | o | CONNECTOR (COAXIAL) |
| CN112 *2 | 1-764-078-21 | s | PIN, CONNECTOR (PC BOARD) 3P |
| D1 | 8-719-801-78 | s | DIODE 1SS184 |
| D2 | 8-719-801-78 | s | DIODE 1SS184 |
| D3 | 8-719-801-78 | s | DIODE 1SS184 |
| D4 | 8-719-801-78 | s | DIODE 1SS184 |
| D5 | 8-719-801-78 | s | DIODE 1SS184 |
| D6 | 8-719-801-78 | s | DIODE 1SS184 |
| D7 *2 | 8-719-046-86 | s | DIODE F1J6TP |
| FB1 | 1-414-772-11 | s | INDUCTOR,MICRO(CHIP TYPE) 2012 |
| FB2 | 1-414-772-11 | s | INDUCTOR,MICRO(CHIP TYPE) 2012 |
| FB3 | 1-414-772-11 | s | INDUCTOR,MICRO(CHIP TYPE) 2012 |
| FB4 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB5 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB6 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB7 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB8 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB9 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB10 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB11 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB12 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB13 | 1-469-108-11 | s | FERRITE, EMI (SMD) |



| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| FB14 | 1-469-108-11 | s | FERRITE, EMI (SMD) |
| FB15 | 1-469-108-11 | s | FERRITE, EMI (SMD) |
| FB16 | 1-414-772-11 | s | INDUCTOR,MICRO(CHIP TYPE) 2012 |
| FB17 | 1-414-772-11 | s | INDUCTOR,MICRO(CHIP TYPE) 2012 |
| FB18 | 1-414-772-11 | s | INDUCTOR,MICRO(CHIP TYPE) 2012 |
| FB19 | 1-414-772-11 | s | INDUCTOR,MICRO(CHIP TYPE) 2012 |
| FB20 | 1-414-772-11 | s | INDUCTOR,MICRO(CHIP TYPE) 2012 |
| FB21 | 1-414-772-11 | s | INDUCTOR,MICRO(CHIP TYPE) 2012 |
| FB22 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB23 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB24 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB25 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB26 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB27 | 1-469-108-11 | s | FERRITE, EMI (SMD) |
| FL1 | 1-234-851-11 | s | FILTER, EMI REMOVAL |
| FL2 | 1-234-851-11 | s | FILTER, EMI REMOVAL |
| FL3 | 1-239-896-12 | s | FILTER, EMI (SMD) |
| FL4 | 1-239-896-12 | s | FILTER, EMI (SMD) |
| FL5 | 1-234-851-11 | s | FILTER, EMI REMOVAL |
| FL6 | 1-234-851-11 | s | FILTER, EMI REMOVAL |
| FL7 | 1-239-896-12 | s | FILTER, EMI (SMD) |
| FL8 | 1-239-896-12 | s | FILTER, EMI (SMD) |
| FL9 | 1-239-896-12 | s | FILTER, EMI (SMD) |
| FL10 | 1-239-896-12 | s | FILTER, EMI (SMD) |
| FL11 | 1-239-896-12 | s | FILTER, EMI (SMD) |
| FL12 | 1-239-896-12 | s | FILTER, EMI (SMD) |
| FL13 | 1-239-896-12 | s | FILTER, EMI (SMD) |
| FL14 | 1-239-896-12 | s | FILTER, EMI (SMD) |
| FL15 | 1-234-851-11 | s | FILTER, EMI REMOVAL |
| FL16 | 1-234-851-11 | s | FILTER, EMI REMOVAL |
| FL17 | 1-239-896-12 | s | FILTER, EMI (SMD) |
| FL18 | 1-239-896-12 | s | FILTER, EMI (SMD) |
| FL19 | 1-239-896-12 | s | FILTER, EMI (SMD) |
| FL20 | 1-239-896-12 | s | FILTER, EMI (SMD) |
| FL21 | 1-239-896-12 | s | FILTER, EMI (SMD) |
| FL22 | 1-239-896-12 | s | FILTER, EMI (SMD) |
| FL23 | 1-239-896-12 | s | FILTER, EMI (SMD) |
| FL24 | 1-239-896-12 | s | FILTER, EMI (SMD) |
| FL25 | 1-239-896-12 | s | FILTER, EMI (SMD) |
| FL26 | 1-239-896-12 | s | FILTER, EMI (SMD) |
| FL27 | 1-239-896-12 | s | FILTER, EMI (SMD) |
| FL28 | 1-239-896-12 | s | FILTER, EMI (SMD) |
| FL29 | 1-239-896-12 | s | FILTER, EMI (SMD) |
| FL30 | 1-239-896-12 | s | FILTER, EMI (SMD) |
| FL31 | 1-239-896-12 | s | FILTER, EMI (SMD) |
| FL32 | 1-239-896-12 | s | FILTER, EMI (SMD) |
| FL33 | 1-239-896-12 | s | FILTER, EMI (SMD) |
| IC2 | 6-702-481-01 | s | IC PCA9555DB-118 |
| IC3 | 6-702-481-01 | s | IC PCA9555DB-118 |
| IC4 | 6-702-481-01 | s | IC PCA9555DB-118 |
| L1 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L2 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L3 | 1-416-344-11 | s | COIL, CHOKE 10UH |
| L4 | 1-416-344-11 | s | COIL, CHOKE 10UH |
| L5 | 1-416-344-11 | s | COIL, CHOKE 10UH |
| L6 | 1-416-948-21 | s | COIL, CHOKE (SMD) |
| L7 | 1-416-948-21 | s | COIL, CHOKE (SMD) |
| L8 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |

(MB-1060 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| L9 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |
| L10 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |
| L11 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |
| L12 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |
| L13 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |
| L14 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |
| L15 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |
| L16 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |
| L17 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |
| L18 | 1-416-344-11 | s | COIL, CHOKE 10UH |
| L19 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |
| L20 | 1-416-344-11 | s | COIL, CHOKE 10UH |
| Q1 | 8-729-928-81 | s | TRANSISTOR DTC144EE |
| Q2 | 8-729-928-81 | s | TRANSISTOR DTC144EE |
| Q3 | 8-729-928-81 | s | TRANSISTOR DTC144EE |
| Q4 | 8-729-928-81 | s | TRANSISTOR DTC144EE |
| R1 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R2 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R3 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R4 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R5 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R6 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R7 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R8 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R9 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R12 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R13 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R14 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| RB1 | 1-234-380-11 | s | RESISTOR,NETWORK 47KX4 (1005) |
| RB2 | 1-234-380-11 | s | RESISTOR,NETWORK 47KX4 (1005) |
| RB3 | 1-234-380-11 | s | RESISTOR,NETWORK 47KX4 (1005) |
| RB4 | 1-234-380-11 | s | RESISTOR,NETWORK 47KX4 (1005) |
| RB5 | 1-234-380-11 | s | RESISTOR,NETWORK 47KX4 (1005) |
| RB6 | 1-234-380-11 | s | RESISTOR,NETWORK 47KX4 (1005) |
| RB7 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB8 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB9 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB10 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB11 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB12 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB13 | 1-234-380-11 | s | RESISTOR,NETWORK 47KX4 (1005) |
| RB14 | 1-234-380-11 | s | RESISTOR,NETWORK 47KX4 (1005) |
| RB15 | 1-234-380-11 | s | RESISTOR,NETWORK 47KX4 (1005) |
| RB16 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB17 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB18 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB19 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB20 | 1-234-380-11 | s | RESISTOR,NETWORK 47KX4 (1005) |
| THP1 | ⚠ 1-803-615-11 | s | THERMISTOR, POSITIVE |
| THP2 | ⚠ 1-803-615-11 | s | THERMISTOR, POSITIVE |
| THP3 | ⚠ 1-803-615-11 | s | THERMISTOR, POSITIVE |

MX-109 BOARD (SERVICE PARTS NO. SUFFIX A)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| 1pc | A-1142-714-A | s | MOUNTED CIRCUIT BOARD, MX-109 |
| 1pc | 1-234-981-11 | s | FILTER,MPX |
| C1 | 1-165-908-91 | s | CAP, CERAMIC 1000000PF B 1608 |
| C2 | 1-165-908-91 | s | CAP, CERAMIC 1000000PF B 1608 |
| C3 | 1-126-396-21 | s | CAP, CHIP ELECT 47MF (6.3X5.7) |
| C4 | 1-126-396-21 | s | CAP, CHIP ELECT 47MF (6.3X5.7) |
| C5 | 1-164-874-81 | s | CAP,CHIP CERAMIC 100PF CH 1005 |
| C6 | 1-164-874-81 | s | CAP,CHIP CERAMIC 100PF CH 1005 |
| C7 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C8 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C9 | 1-164-874-81 | s | CAP,CHIP CERAMIC 100PF CH 1005 |
| C10 | 1-126-391-21 | s | CAP, CHIP ELECT 47MF (5X5.7) |
| C11 | 1-165-908-91 | s | CAP, CERAMIC 1000000PF B 1608 |
| C12 | 1-165-908-91 | s | CAP, CERAMIC 1000000PF B 1608 |
| C13 | 1-165-908-91 | s | CAP, CERAMIC 1000000PF B 1608 |
| C14 | 1-165-872-21 | s | CAP, ELECT 47MF (5.0X6.5) |
| C15 | 1-165-872-21 | s | CAP, ELECT 47MF (5.0X6.5) |
| C16 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C101 | 1-164-844-81 | s | CAP, CHIP CERAMIC 4PF CH 1005 |
| C103 | 1-127-692-91 | s | CAP, CHIP CERAMIC 10MF B 3225 |
| C104 | 1-127-692-91 | s | CAP, CHIP CERAMIC 10MF B 3225 |
| C105 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C106 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C107 | 1-164-842-81 | s | CAP,CHIP CERAMIC 2.0PF CK 1005 |
| C108 | 1-164-937-81 | s | CAP, CHIPCERAMIC 1000PF B 1005 |
| C109 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C110 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C111 | 1-127-692-91 | s | CAP, CHIP CERAMIC 10MF B 3225 |
| C112 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C113 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C114 | 1-164-937-81 | s | CAP, CHIPCERAMIC 1000PF B 1005 |
| C115 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C116 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C117 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C118 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C119 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C120 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C121 | 1-164-937-81 | s | CAP, CHIPCERAMIC 1000PF B 1005 |
| C122 | 1-164-937-81 | s | CAP, CHIPCERAMIC 1000PF B 1005 |
| C123 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C124 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C125 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C126 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C127 | 1-164-937-81 | s | CAP, CHIPCERAMIC 1000PF B 1005 |
| C128 | 1-164-937-81 | s | CAP, CHIPCERAMIC 1000PF B 1005 |
| C129 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C130 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C131 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C132 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C133 | 1-164-937-81 | s | CAP, CHIPCERAMIC 1000PF B 1005 |
| C134 | 1-164-937-81 | s | CAP, CHIPCERAMIC 1000PF B 1005 |
| C135 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C136 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C137 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C138 | 1-164-937-81 | s | CAP, CHIPCERAMIC 1000PF B 1005 |
| C139 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C140 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C141 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |

(MX-109 BOARD (SERVICE PARTS NO. SUFFIX A))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C142 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C143 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C144 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C145 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C146 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C147 | 1-164-847-81 | s | CAP, CHIP CERAMIC 7PF CH 1005 |
| C148 | 1-164-842-81 | s | CAP,CHIP CERAMIC 2.0PF CK 1005 |
| C149 | 1-164-847-81 | s | CAP, CHIP CERAMIC 7PF CH 1005 |
| C201 | 1-126-391-21 | s | CAP, CHIP ELECT 47MF (5X5.7) |
| C202 | 1-126-391-21 | s | CAP, CHIP ELECT 47MF (5X5.7) |
| C203 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C204 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C205 | 1-164-840-81 | s | CAP, CHIP CERAMIC 1PF CK 1005 |
| C206 | 1-164-840-81 | s | CAP, CHIP CERAMIC 1PF CK 1005 |
| C208 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C209 | 1-164-937-81 | s | CAP, CHIPCERAMIC 1000PF B 1005 |
| C210 | 1-164-937-81 | s | CAP, CHIPCERAMIC 1000PF B 1005 |
| C211 | 1-165-908-91 | s | CAP, CERAMIC 1000000PF B 1608 |
| C212 | 1-165-908-91 | s | CAP, CERAMIC 1000000PF B 1608 |
| C213 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C214 | 1-165-908-91 | s | CAP, CERAMIC 1000000PF B 1608 |
| C215 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C216 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C217 | 1-165-908-91 | s | CAP, CERAMIC 1000000PF B 1608 |
| C218 | 1-165-908-91 | s | CAP, CERAMIC 1000000PF B 1608 |
| C219 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C221 | 1-128-414-21 | s | CAP, CHIP ELECT 220MF |
| C222 | 1-128-414-21 | s | CAP, CHIP ELECT 220MF |
| C223 | 1-164-842-81 | s | CAP,CHIP CERAMIC 2.0PF CK 1005 |
| C224 | 1-164-847-81 | s | CAP, CHIP CERAMIC 7PF CH 1005 |
| C225 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C226 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C227 | 1-127-950-21 | s | CAP, CHIP FILM 0.01MF (2012) |
| C228 | 1-164-842-81 | s | CAP,CHIP CERAMIC 2.0PF CK 1005 |
| C229 | 1-164-847-81 | s | CAP, CHIP CERAMIC 7PF CH 1005 |
| C230 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C231 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C232 | 1-126-391-21 | s | CAP, CHIP ELECT 47MF (5X5.7) |
| C233 | 1-126-391-21 | s | CAP, CHIP ELECT 47MF (5X5.7) |
| C234 | 1-115-153-21 | s | CAP, ELECT 4.7MF |
| C235 | 1-117-144-21 | s | CAP, ELECT 0.47MF |
| C236 | 1-127-954-21 | s | CAP, CHIP FILM 0.047MF (3216) |
| C237 | 1-165-908-91 | s | CAP, CERAMIC 1000000PF B 1608 |
| C238 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C239 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C240 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C250 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C251 | 1-126-391-21 | s | CAP, CHIP ELECT 47MF (5X5.7) |
| C252 | 1-164-935-81 | s | CAP, CHIP CERAMIC 470PF B 1005 |
| C253 | 1-164-933-81 | s | CAP, CHIP CERAMIC 220PF B 1005 |
| C254 | 1-164-933-81 | s | CAP, CHIP CERAMIC 220PF B 1005 |
| C255 | 1-164-933-81 | s | CAP, CHIP CERAMIC 220PF B 1005 |
| C256 | 1-165-908-91 | s | CAP, CERAMIC 1000000PF B 1608 |
| C258 | 1-164-870-81 | s | CAP, CHIP CERAMIC 68PF CH 1005 |
| C259 | 1-164-870-81 | s | CAP, CHIP CERAMIC 68PF CH 1005 |
| C260 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C261 | 1-165-908-91 | s | CAP, CERAMIC 1000000PF B 1608 |
| CN1 | 1-695-930-51 | s | CONNECTOR, FPC 16P |

(MX-109 BOARD (SERVICE PARTS NO. SUFFIX A))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| CN2 | 1-766-703-21 | s | CONNECTOR, COAXIAL |
| CN3 | 1-766-703-21 | s | CONNECTOR, COAXIAL |
| D1 | 8-719-017-03 | s | DIODE 02DZ4.7-TPH3 |
| D2 | 8-719-017-03 | s | DIODE 02DZ4.7-TPH3 |
| D101 | 8-719-989-01 | s | DIODE DA221-TL |
| D201 | 8-719-083-90 | s | DIODE HVU363ATRU |
| D202 | 8-719-083-90 | s | DIODE HVU363ATRU |
| E1 | 1-535-877-22 | s | CHIP, CHECKER |
| E2 | 1-535-877-22 | s | CHIP, CHECKER |
| E3 | 1-535-877-22 | s | CHIP, CHECKER |
| E4 | 1-535-877-22 | s | CHIP, CHECKER |
| FL101 | 1-234-987-11 | s | FILTER, BAND PASS |
| FL201 | 1-233-892-21 | s | FILTER, LOW PASS |
| IC1 | 8-759-327-01 | s | IC NJM062V(TE2) |
| IC2 | 8-759-338-95 | s | IC NJM2903V(TE2) |
| IC3 | 8-759-185-42 | s | IC LM4040AIM3-2.5 |
| IC201 | 8-752-099-49 | s | IC CXA3556N-T4 |
| IC202 | 6-706-863-01 | s | IC LMH6732MFX/NOPB |
| IC203 | 8-752-068-20 | s | IC CXA1521M-TH |
| IC204 | 6-706-863-01 | s | IC LMH6732MFX/NOPB |
| IC205 | 8-759-669-66 | s | IC TLC272CPWR-12 |
| IC250 | 8-759-344-12 | s | IC GS4981CTAE3 |
| IC251 | 8-759-472-35 | s | IC 74VHC221AMTCX |
| IC252 | 8-759-421-87 | s | IC UPC319G2-E2 |
| L1 | 1-416-510-21 | s | COIL, CHOKE 100UH |
| L2 | 1-416-510-21 | s | COIL, CHOKE 100UH |
| L101 | 1-412-975-41 | s | INDUCTOR, SMALL TYPE 0.47UH |
| L102 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L103 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L104 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L105 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L106 | 1-412-935-21 | s | INDUCTOR 0.47UH (2520) |
| L201 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L202 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L203 | 1-412-937-21 | s | INDUCTOR 0.68UH (2520) |
| L204 | 1-412-935-21 | s | INDUCTOR 0.47UH (2520) |
| L205 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L206 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L250 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L251 | 1-414-404-41 | s | INDUCTOR (SMD) 100.0UH |
| L252 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| LV101 | 1-409-817-21 | s | COIL, VARIABLE |
| LV201 | 1-409-820-21 | s | COIL, VARIABLE |
| Q1 | 8-729-209-73 | s | TRANSISTOR 2SA1213Y-TE12L |
| Q2 | 8-729-209-77 | s | TRANSISTOR 2SC2873Y-TE12L |
| Q101 | 8-729-026-84 | s | TRANSISTOR 2SC4215Y-TE85L |
| Q102 | 8-729-023-48 | s | TRANSISTOR 2SC4227(R35)-T1 |
| Q103 | 8-729-024-59 | s | TRANSISTOR 2SA1688-5-TL-E |
| Q104 | 8-729-026-33 | s | TRANSISTOR XP6534-TX |
| Q105 | 8-729-026-84 | s | TRANSISTOR 2SC4215Y-TE85L |
| Q106 | 8-729-026-33 | s | TRANSISTOR XP6534-TX |
| Q107 | 8-729-026-33 | s | TRANSISTOR XP6534-TX |
| Q108 | 8-729-026-84 | s | TRANSISTOR 2SC4215Y-TE85L |
| Q109 | 8-729-026-33 | s | TRANSISTOR XP6534-TX |
| Q110 | 8-729-026-33 | s | TRANSISTOR XP6534-TX |
| Q111 | 8-729-026-84 | s | TRANSISTOR 2SC4215Y-TE85L |

(MX-109 BOARD (SERVICE PARTS NO. SUFFIX A))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| Q112 | 8-729-026-33 | s | TRANSISTOR XP6534-TX |
| Q113 | 8-729-026-33 | s | TRANSISTOR XP6534-TX |
| Q114 | 8-729-026-84 | s | TRANSISTOR 2SC4215Y-TE85L |
| Q115 | 8-729-026-33 | s | TRANSISTOR XP6534-TX |
| Q201 | 8-729-026-33 | s | TRANSISTOR XP6534-TX |
| Q202 | 8-729-026-84 | s | TRANSISTOR 2SC4215Y-TE85L |
| Q203 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q204 | 6-550-361-01 | s | TRANSISTOR 2SK2539-6/7/8-TB-E |
| Q205 | 6-550-361-01 | s | TRANSISTOR 2SK2539-6/7/8-TB-E |
| Q250 | 8-729-140-86 | s | TRANSISTOR 2SA1610-T1Y34 |
| Q251 | 8-729-140-86 | s | TRANSISTOR 2SA1610-T1Y34 |
| R1 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R2 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R3 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R4 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R5 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R6 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R7 | 1-208-931-81 | s | RES, CHIP 68K (1005) |
| R8 | 1-208-931-81 | s | RES, CHIP 68K (1005) |
| R9 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R10 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R11 | 1-208-931-81 | s | RES, CHIP 68K (1005) |
| R12 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R13 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R14 | 1-218-981-81 | s | RES, CHIP 220K |
| R15 | 1-218-981-81 | s | RES, CHIP 220K |
| R101 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R102 | 1-208-907-81 | s | RES, CHIP 6.8K (1005) |
| R103 | 1-208-891-81 | s | RES, CHIP 1.5K (1005) |
| R104 | 1-208-867-81 | s | RES, CHIP 150 (1005) |
| R105 | 1-208-867-81 | s | RES, CHIP 150 (1005) |
| R106 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R107 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R108 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R109 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R110 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R111 | 1-220-878-81 | s | RES, CHIP 22 (1005) |
| R112 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R113 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R114 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R115 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R116 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R117 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R118 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R119 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R120 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R121 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R122 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R123 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R124 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R125 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R126 | 1-208-899-81 | s | RES, CHIP 3.3K (1005) |
| R127 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R128 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R129 | 1-208-899-81 | s | RES, CHIP 3.3K (1005) |
| R130 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R131 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R132 | 1-208-863-81 | s | RES, CHIP 100 (1005) |

(MX-109 BOARD (SERVICE PARTS NO. SUFFIX A))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R133 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R134 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R135 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R136 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R137 | 1-220-882-81 | s | RES, CHIP 33 (1005) |
| R138 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R139 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R140 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R141 | 1-208-899-81 | s | RES, CHIP 3.3K (1005) |
| R142 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R143 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R144 | 1-208-899-81 | s | RES, CHIP 3.3K (1005) |
| R145 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R146 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R147 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R148 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R149 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R150 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R151 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R152 | 1-220-882-81 | s | RES, CHIP 33 (1005) |
| R153 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R154 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R155 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R156 | 1-208-899-81 | s | RES, CHIP 3.3K (1005) |
| R157 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R158 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R159 | 1-208-899-81 | s | RES, CHIP 3.3K (1005) |
| R160 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R161 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R162 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R163 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R164 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R165 | 1-220-878-81 | s | RES, CHIP 22 (1005) |
| R166 | 1-220-882-81 | s | RES, CHIP 33 (1005) |
| R167 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R168 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R169 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R170 | 1-220-882-81 | s | RES, CHIP 33 (1005) |
| R171 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R172 | 1-220-878-81 | s | RES, CHIP 22 (1005) |
| R173 | 1-220-882-81 | s | RES, CHIP 33 (1005) |
| R174 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R175 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R176 | 1-208-899-81 | s | RES, CHIP 3.3K (1005) |
| R177 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R178 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R179 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R180 | 1-208-899-81 | s | RES, CHIP 3.3K (1005) |
| R181 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R182 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R183 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R184 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R201 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R202 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R204 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R206 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R208 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R209 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R210 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |

(MX-109 BOARD (SERVICE PARTS NO. SUFFIX A))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R211 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R212 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R213 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R214 | 1-208-891-81 | s | RES, CHIP 1.5K (1005) |
| R215 | 1-220-878-81 | s | RES, CHIP 22 (1005) |
| R216 | 1-220-878-81 | s | RES, CHIP 22 (1005) |
| R218 | 1-220-882-81 | s | RES, CHIP 33 (1005) |
| R219 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R220 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R221 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R222 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R223 | 1-208-867-81 | s | RES, CHIP 150 (1005) |
| R225 | 1-208-875-81 | s | RES, CHIP 330 (1005) |
| R226 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R227 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R230 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R231 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R232 | 1-208-907-81 | s | RES, CHIP 6.8K (1005) |
| R233 | 1-208-875-81 | s | RES, CHIP 330 (1005) |
| R234 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R236 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R237 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R238 | 1-218-977-81 | s | RES, CHIP 100K |
| R240 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R241 | 1-218-977-81 | s | RES, CHIP 100K |
| R242 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R243 | 1-208-899-81 | s | RES, CHIP 3.3K (1005) |
| R244 | 1-208-891-81 | s | RES, CHIP 1.5K (1005) |
| R246 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R247 | 1-208-891-81 | s | RES, CHIP 1.5K (1005) |
| R248 | 1-218-977-81 | s | RES, CHIP 100K |
| R249 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R250 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R252 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R253 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R254 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R255 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R256 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R257 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R258 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R259 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R260 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R261 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R262 | 1-218-989-81 | s | RES, CHIP 1M |
| R263 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R264 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R265 | 1-218-981-81 | s | RES, CHIP 220K |
| R266 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R267 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R268 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R269 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R270 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R271 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R272 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R273 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R274 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R275 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R276 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R277 | 1-208-875-81 | s | RES, CHIP 330 (1005) |

(MX-109 BOARD (SERVICE PARTS NO. SUFFIX A))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R278 | 1-208-899-81 | s | RES, CHIP 3.3K (1005) |
| R279 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R280 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R281 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R282 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R283 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R284 | 1-208-899-81 | s | RES, CHIP 3.3K (1005) |
| R301 | 1-208-867-81 | s | RES, CHIP 150 (1005) |
| R302 | 1-208-867-81 | s | RES, CHIP 150 (1005) |
| RV201 | 1-225-789-21 | s | RES, ADJ, CERMET 2K |
| THP1 | ⚠ 1-533-817-21 | s | THERMISTOR |
| THP2 | ⚠ 1-533-817-21 | s | THERMISTOR |
| TP101 | 1-535-877-22 | s | CHIP, CHECKER |
| TP201 | 1-535-877-22 | s | CHIP, CHECKER |
| TP202 | 1-535-877-22 | s | CHIP, CHECKER |
| TP203 | 1-535-877-22 | s | CHIP, CHECKER |

MX-109 BOARD (SERVICE PARTS NO. SUFFIX B-)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| 1pc | A-1142-714-B | s | MOUNTED CIRCUIT BOARD, MX-109 |
| 1pc | 1-234-981-11 | s | FILTER,MPX |
| 2pcs | 7-682-903-11 | s | SCREW +PWH 3X6 |
| C1 | 1-112-298-91 | o | CAP, CERAMIC 1MF B (1608) |
| C2 | 1-112-298-91 | o | CAP, CERAMIC 1MF B (1608) |
| C3 | 1-126-396-21 | s | CAP, CHIP ELECT 47MF (6.3X5.7) |
| C4 | 1-126-396-21 | s | CAP, CHIP ELECT 47MF (6.3X5.7) |
| C5 | 1-164-874-81 | s | CAP,CHIP CERAMIC 100PF CH 1005 |
| C6 | 1-164-874-81 | s | CAP,CHIP CERAMIC 100PF CH 1005 |
| C7 | 1-125-777-11 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C8 | 1-125-777-11 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C9 | 1-164-874-81 | s | CAP,CHIP CERAMIC 100PF CH 1005 |
| C10 | 1-126-391-21 | s | CAP, CHIP ELECT 47MF (5X5.7) |
| C11 | 1-112-298-91 | o | CAP, CERAMIC 1MF B (1608) |
| C12 | 1-112-298-91 | o | CAP, CERAMIC 1MF B (1608) |
| C13 | 1-112-298-91 | o | CAP, CERAMIC 1MF B (1608) |
| C14 | 1-165-872-21 | s | CAP, ELECT 47MF (5.0X6.5) |
| C15 | 1-165-872-21 | s | CAP, ELECT 47MF (5.0X6.5) |
| C16 | 1-125-777-11 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C101 | 1-164-844-81 | s | CAP, CHIP CERAMIC 4PF CH 1005 |
| C103 | 1-127-692-91 | s | CAP, CHIP CERAMIC 10MF B 3225 |
| C104 | 1-127-692-91 | s | CAP, CHIP CERAMIC 10MF B 3225 |
| C105 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C106 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C107 | 1-164-842-81 | s | CAP,CHIP CERAMIC 2.0PF CK 1005 |
| C108 | 1-112-692-11 | s | CAP,CHIP CERAMIC1000PF CH 1005 |
| C109 | 1-125-777-11 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C110 | 1-125-777-11 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C111 | 1-127-692-91 | s | CAP, CHIP CERAMIC 10MF B 3225 |
| C112 | 1-125-777-11 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C113 | 1-125-777-11 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C114 | 1-112-692-11 | s | CAP,CHIP CERAMIC1000PF CH 1005 |
| C115 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C116 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C117 | 1-125-777-11 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C118 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C119 | 1-125-777-11 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C120 | 1-125-777-11 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C121 | 1-112-692-11 | s | CAP,CHIP CERAMIC1000PF CH 1005 |
| C122 | 1-112-692-11 | s | CAP,CHIP CERAMIC1000PF CH 1005 |
| C123 | 1-125-777-11 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C124 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C125 | 1-125-777-11 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C126 | 1-125-777-11 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C127 | 1-112-692-11 | s | CAP,CHIP CERAMIC1000PF CH 1005 |
| C128 | 1-112-692-11 | s | CAP,CHIP CERAMIC1000PF CH 1005 |
| C129 | 1-125-777-11 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C130 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C131 | 1-125-777-11 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C132 | 1-125-777-11 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C133 | 1-112-692-11 | s | CAP,CHIP CERAMIC1000PF CH 1005 |
| C134 | 1-112-692-11 | s | CAP,CHIP CERAMIC1000PF CH 1005 |
| C135 | 1-125-777-11 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C136 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C137 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C138 | 1-112-692-11 | s | CAP,CHIP CERAMIC1000PF CH 1005 |
| C139 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C140 | 1-125-777-11 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |

(MX-109 BOARD (SERVICE PARTS NO. SUFFIX B-))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C141 | 1-125-777-11 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C142 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C143 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C144 | 1-125-777-11 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C145 | 1-125-777-11 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C146 | 1-125-777-11 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C147 | 1-164-847-81 | s | CAP, CHIP CERAMIC 7PF CH 1005 |
| C148 | 1-164-842-81 | s | CAP,CHIP CERAMIC 2.0PF CK 1005 |
| C149 | 1-164-847-81 | s | CAP, CHIP CERAMIC 7PF CH 1005 |
| C201 | 1-126-391-21 | s | CAP, CHIP ELECT 47MF (5X5.7) |
| C202 | 1-126-391-21 | s | CAP, CHIP ELECT 47MF (5X5.7) |
| C203 | 1-125-777-11 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C204 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C205 | 1-164-840-81 | s | CAP, CHIP CERAMIC 1PF CK 1005 |
| C206 | 1-164-840-81 | s | CAP, CHIP CERAMIC 1PF CK 1005 |
| C208 | 1-125-777-11 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C209 | 1-112-692-11 | s | CAP,CHIP CERAMIC1000PF CH 1005 |
| C210 | 1-112-692-11 | s | CAP,CHIP CERAMIC1000PF CH 1005 |
| C211 | 1-112-298-91 | o | CAP, CERAMIC 1MF B (1608) |
| C212 | 1-112-298-91 | o | CAP, CERAMIC 1MF B (1608) |
| C213 | 1-125-777-11 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C214 | 1-112-298-91 | o | CAP, CERAMIC 1MF B (1608) |
| C215 | 1-125-777-11 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C216 | 1-125-777-11 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C217 | 1-112-298-91 | o | CAP, CERAMIC 1MF B (1608) |
| C218 | 1-112-298-91 | o | CAP, CERAMIC 1MF B (1608) |
| C219 | 1-125-777-11 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C221 | 1-128-414-21 | s | CAP, CHIP ELECT 220MF |
| C222 | 1-128-414-21 | s | CAP, CHIP ELECT 220MF |
| C223 | 1-164-842-81 | s | CAP,CHIP CERAMIC 2.0PF CK 1005 |
| C224 | 1-164-847-81 | s | CAP, CHIP CERAMIC 7PF CH 1005 |
| C225 | 1-125-777-11 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C226 | 1-125-777-11 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C227 | 1-127-950-21 | s | CAP, CHIP FILM 0.01MF (2012) |
| C228 | 1-164-842-81 | s | CAP,CHIP CERAMIC 2.0PF CK 1005 |
| C229 | 1-164-847-81 | s | CAP, CHIP CERAMIC 7PF CH 1005 |
| C230 | 1-125-777-11 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C231 | 1-125-777-11 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C232 | 1-126-391-21 | s | CAP, CHIP ELECT 47MF (5X5.7) |
| C233 | 1-126-391-21 | s | CAP, CHIP ELECT 47MF (5X5.7) |
| C234 | 1-115-153-21 | s | CAP, ELECT 4.7MF |
| C235 | 1-117-144-21 | s | CAP, ELECT 0.47MF |
| C236 | 1-127-954-21 | s | CAP, CHIP FILM 0.047MF (3216) |
| C237 | 1-112-298-91 | o | CAP, CERAMIC 1MF B (1608) |
| C238 | 1-125-777-11 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C239 | 1-125-777-11 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C240 | 1-125-777-11 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C250 | 1-125-777-11 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C251 | 1-126-391-21 | s | CAP, CHIP ELECT 47MF (5X5.7) |
| C252 | 1-164-935-81 | s | CAP, CHIP CERAMIC 470PF B 1005 |
| C253 | 1-164-933-81 | s | CAP, CHIP CERAMIC 220PF B 1005 |
| C254 | 1-164-933-81 | s | CAP, CHIP CERAMIC 220PF B 1005 |
| C255 | 1-164-933-81 | s | CAP, CHIP CERAMIC 220PF B 1005 |
| C256 | 1-112-298-91 | o | CAP, CERAMIC 1MF B (1608) |
| C258 | 1-164-870-81 | s | CAP, CHIP CERAMIC 68PF CH 1005 |
| C259 | 1-164-870-81 | s | CAP, CHIP CERAMIC 68PF CH 1005 |
| C260 | 1-125-777-11 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C261 | 1-112-298-91 | o | CAP, CERAMIC 1MF B (1608) |
| C301 | 1-126-391-21 | s | CAP, CHIP ELECT 47MF (5X5.7) |

(MX-109 BOARD (SERVICE PARTS NO. SUFFIX B-))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C302 | 1-126-391-21 | s | CAP, CHIP ELECT 47MF (5X5.7) |
| C303 | 1-125-777-11 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C304 | 1-125-777-11 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C305 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C306 | 1-125-777-11 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C307 | 1-125-777-11 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C308 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C309 | 1-164-842-81 | s | CAP,CHIP CERAMIC 2.0PF CK 1005 |
| C310 | 1-125-777-11 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C311 | 1-127-692-91 | s | CAP, CHIP CERAMIC 10MF B 3225 |
| C312 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C313 | 1-127-692-91 | s | CAP, CHIP CERAMIC 10MF B 3225 |
| C314 | 1-125-777-11 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C315 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C316 | 1-125-777-11 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C317 | 1-112-298-91 | o | CAP, CERAMIC 1MF B (1608) |
| C318 | 1-125-777-11 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C319 | 1-125-777-11 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C320 | 1-164-847-81 | s | CAP, CHIP CERAMIC 7PF CH 1005 |
| C321 | 1-125-777-11 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C322 | 1-125-777-11 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C323 | 1-164-862-81 | s | CAP, CHIP CERAMIC 33PF CH 1005 |
| C324 | 1-112-298-91 | o | CAP, CERAMIC 1MF B (1608) |
| C325 | 1-165-872-21 | s | CAP, ELECT 47MF (5.0X6.5) |
| C327 | 1-164-858-81 | s | CAP, CHIP CERAMIC 22PF CH 1005 |
| C328 | 1-112-015-91 | s | CAP, CHIP CERAMIC 47MF B 3225 |
| C332 | 1-125-777-11 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C333 | 1-125-777-11 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C334 | 1-165-872-21 | s | CAP, ELECT 47MF (5.0X6.5) |
| C335 | 1-165-872-21 | s | CAP, ELECT 47MF (5.0X6.5) |
| CN1 | 1-695-930-51 | s | CONNECTOR, FPC 16P |
| CN2 | 1-766-703-21 | s | CONNECTOR, COAXIAL |
| CN3 | 1-766-703-21 | s | CONNECTOR, COAXIAL |
| D1 | 8-719-017-03 | s | DIODE 02DZ4.7-TPH3 |
| D2 | 8-719-017-03 | s | DIODE 02DZ4.7-TPH3 |
| D101 | 8-719-989-01 | s | DIODE DA221-TL |
| D201 | 8-719-083-90 | s | DIODE HVU363ATRU |
| D202 | 8-719-083-90 | s | DIODE HVU363ATRU |
| D301 | 8-719-016-95 | s | DIODE 02DZ3.3-TPH3 |
| E1 | 1-535-877-22 | s | CHIP, CHECKER |
| E2 | 1-535-877-22 | s | CHIP, CHECKER |
| E3 | 1-535-877-22 | s | CHIP, CHECKER |
| E4 | 1-535-877-22 | s | CHIP, CHECKER |
| FL101 | 1-234-987-11 | s | FILTER, BAND PASS |
| FL201 | 1-233-892-21 | s | FILTER, LOW PASS |
| FL301 | 1-239-948-21 | s | FILTER, LOW PASS (VIDEO) |
| IC1 | 8-759-327-01 | s | IC NJM062V(TE2) |
| IC2 | 8-759-338-95 | s | IC NJM2903V(TE2) |
| IC3 | 8-759-185-42 | s | IC LM4040AIM3-2.5 |
| IC201 | 8-752-099-49 | s | IC CXA3556N-T4 |
| IC202 | 6-706-863-01 | s | IC LMH6732MFX/NOPB |
| IC203 | 8-752-068-20 | s | IC CXA1521M-TH |
| IC204 | 6-706-863-01 | s | IC LMH6732MFX/NOPB |
| IC205 | 8-759-669-66 | s | IC TLC272CPWR-12 |
| IC250 | 8-759-344-12 | s | IC GS4981CTAE3 |
| IC251 | 8-759-472-35 | s | IC 74VHC221AMTCX |
| IC252 | 8-759-421-87 | s | IC UPC319G2-E2 |

(MX-109 BOARD (SERVICE PARTS NO. SUFFIX B-))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| IC301 | 6-707-003-01 | s | IC NJM2542V(TE2) |
| IC302 | 8-759-561-46 | s | IC AD8014ARTZ-REEL7 |
| L1 | 1-416-510-21 | s | COIL, CHOKE 100UH |
| L2 | 1-416-510-21 | s | COIL, CHOKE 100UH |
| L101 | 1-412-975-41 | s | INDUCTOR, SMALL TYPE 0.47UH |
| L102 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L103 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L104 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L105 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L106 | 1-412-935-21 | s | INDUCTOR 0.47UH (2520) |
| L201 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L202 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L203 | 1-412-937-21 | s | INDUCTOR 0.68UH (2520) |
| L204 | 1-412-935-21 | s | INDUCTOR 0.47UH (2520) |
| L205 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L206 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L250 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L251 | 1-414-404-41 | s | INDUCTOR (SMD) 100.0UH |
| L252 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L301 | 1-412-056-11 | s | INDUCTOR (SMD) 4.7UH |
| L302 | 1-412-056-11 | s | INDUCTOR (SMD) 4.7UH |
| L303 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L304 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L305 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L306 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| LV101 | 1-409-817-21 | s | COIL, VARIABLE |
| LV201 | 1-409-820-21 | s | COIL, VARIABLE |
| LV301 | 1-457-371-21 | s | COIL, VARIABLE |
| LV302 | 1-457-371-21 | s | COIL, VARIABLE |
| Q1 | 8-729-230-27 | s | TRANSISTOR 2SA1213Y-TE12L |
| Q2 | 8-729-209-77 | s | TRANSISTOR 2SC2873Y-TE12L |
| Q101 | 8-729-026-84 | s | TRANSISTOR 2SC4215Y-TE85L |
| Q102 | 8-729-023-48 | s | TRANSISTOR 2SC4227(R35)-T1 |
| Q103 | 8-729-024-59 | s | TRANSISTOR 2SA1688-5-TL-E |
| Q104 | 8-729-026-33 | s | TRANSISTOR XP6534-TX |
| Q105 | 8-729-026-84 | s | TRANSISTOR 2SC4215Y-TE85L |
| Q106 | 8-729-026-33 | s | TRANSISTOR XP6534-TX |
| Q107 | 8-729-026-33 | s | TRANSISTOR XP6534-TX |
| Q108 | 8-729-026-84 | s | TRANSISTOR 2SC4215Y-TE85L |
| Q109 | 8-729-026-33 | s | TRANSISTOR XP6534-TX |
| Q110 | 8-729-026-33 | s | TRANSISTOR XP6534-TX |
| Q111 | 8-729-026-84 | s | TRANSISTOR 2SC4215Y-TE85L |
| Q112 | 8-729-026-33 | s | TRANSISTOR XP6534-TX |
| Q113 | 8-729-026-33 | s | TRANSISTOR XP6534-TX |
| Q114 | 8-729-026-84 | s | TRANSISTOR 2SC4215Y-TE85L |
| Q115 | 8-729-026-33 | s | TRANSISTOR XP6534-TX |
| Q201 | 8-729-026-33 | s | TRANSISTOR XP6534-TX |
| Q202 | 8-729-026-84 | s | TRANSISTOR 2SC4215Y-TE85L |
| Q203 | 8-729-927-99 | s | TRANSISTOR 2SC4617TL-QR |
| Q204 | 6-550-361-01 | s | TRANSISTOR 2SK2539-6/7/8-TB-E |
| Q205 | 6-550-361-01 | s | TRANSISTOR 2SK2539-6/7/8-TB-E |
| Q250 | 8-729-140-86 | s | TRANSISTOR 2SA1610-T1Y34 |
| Q251 | 8-729-140-86 | s | TRANSISTOR 2SA1610-T1Y34 |
| Q301 | 8-729-047-26 | s | TRANSISTOR 3SK255-T2 |
| Q302 | 8-729-927-99 | s | TRANSISTOR 2SC4617TL-QR |
| Q303 | 8-729-927-99 | s | TRANSISTOR 2SC4617TL-QR |
| Q304 | 8-729-927-99 | s | TRANSISTOR 2SC4617TL-QR |
| Q305 | 8-729-928-19 | s | TRANSISTOR 2SA1774TL-QR |

(MX-109 BOARD (SERVICE PARTS NO. SUFFIX B-))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R1 | 1-218-945-11 | s | RES, CHIP 220 (1005) |
| R2 | 1-218-945-11 | s | RES, CHIP 220 (1005) |
| R3 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R4 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R5 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R6 | 1-208-691-11 | s | RES, CHIP 2.2K (1005) |
| R7 | 1-208-931-81 | s | RES, CHIP 68K (1005) |
| R8 | 1-208-931-81 | s | RES, CHIP 68K (1005) |
| R9 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R10 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R11 | 1-208-931-81 | s | RES, CHIP 68K (1005) |
| R12 | 1-208-715-11 | s | RES, CHIP 22K (1005) |
| R13 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R14 | 1-218-981-81 | s | RES, CHIP 220K |
| R15 | 1-218-981-81 | s | RES, CHIP 220K |
| R101 | 1-208-699-11 | s | RES, CHIP 4.7K (1005) |
| R102 | 1-208-703-11 | s | RES, CHIP 6.8K (1005) |
| R103 | 1-208-891-81 | s | RES, CHIP 1.5K (1005) |
| R104 | 1-208-867-81 | s | RES, CHIP 150 (1005) |
| R105 | 1-208-867-81 | s | RES, CHIP 150 (1005) |
| R106 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R107 | 1-208-691-11 | s | RES, CHIP 2.2K (1005) |
| R108 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R109 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R110 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R111 | 1-208-643-11 | s | RES, CHIP 22 (1005) |
| R112 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R113 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R114 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R115 | 1-208-691-11 | s | RES, CHIP 2.2K (1005) |
| R116 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R117 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R118 | 1-218-945-11 | s | RES, CHIP 220 (1005) |
| R119 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R120 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R121 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R122 | 1-218-945-11 | s | RES, CHIP 220 (1005) |
| R123 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R124 | 1-208-691-11 | s | RES, CHIP 2.2K (1005) |
| R125 | 1-208-691-11 | s | RES, CHIP 2.2K (1005) |
| R126 | 1-208-695-11 | s | RES, CHIP 3.3K (1005) |
| R127 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R128 | 1-208-691-11 | s | RES, CHIP 2.2K (1005) |
| R129 | 1-208-695-11 | s | RES, CHIP 3.3K (1005) |
| R130 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R131 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R132 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R133 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R134 | 1-218-945-11 | s | RES, CHIP 220 (1005) |
| R135 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R136 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R137 | 1-220-882-81 | s | RES, CHIP 33 (1005) |
| R138 | 1-218-945-11 | s | RES, CHIP 220 (1005) |
| R139 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R140 | 1-208-691-11 | s | RES, CHIP 2.2K (1005) |
| R141 | 1-208-695-11 | s | RES, CHIP 3.3K (1005) |
| R142 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R143 | 1-208-691-11 | s | RES, CHIP 2.2K (1005) |
| R144 | 1-208-695-11 | s | RES, CHIP 3.3K (1005) |

(MX-109 BOARD (SERVICE PARTS NO. SUFFIX B-))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R145 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R146 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R147 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R148 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R149 | 1-218-945-11 | s | RES, CHIP 220 (1005) |
| R150 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R151 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R152 | 1-220-882-81 | s | RES, CHIP 33 (1005) |
| R153 | 1-218-945-11 | s | RES, CHIP 220 (1005) |
| R154 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R155 | 1-208-691-11 | s | RES, CHIP 2.2K (1005) |
| R156 | 1-208-695-11 | s | RES, CHIP 3.3K (1005) |
| R157 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R158 | 1-208-691-11 | s | RES, CHIP 2.2K (1005) |
| R159 | 1-208-695-11 | s | RES, CHIP 3.3K (1005) |
| R160 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R161 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R162 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R163 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R164 | 1-218-945-11 | s | RES, CHIP 220 (1005) |
| R165 | 1-208-643-11 | s | RES, CHIP 22 (1005) |
| R166 | 1-220-882-81 | s | RES, CHIP 33 (1005) |
| R167 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R168 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R169 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R170 | 1-220-882-81 | s | RES, CHIP 33 (1005) |
| R171 | 1-218-945-11 | s | RES, CHIP 220 (1005) |
| R172 | 1-208-643-11 | s | RES, CHIP 22 (1005) |
| R173 | 1-220-882-81 | s | RES, CHIP 33 (1005) |
| R174 | 1-208-699-11 | s | RES, CHIP 4.7K (1005) |
| R175 | 1-208-691-11 | s | RES, CHIP 2.2K (1005) |
| R176 | 1-208-695-11 | s | RES, CHIP 3.3K (1005) |
| R177 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R178 | 1-208-699-11 | s | RES, CHIP 4.7K (1005) |
| R179 | 1-208-691-11 | s | RES, CHIP 2.2K (1005) |
| R180 | 1-208-695-11 | s | RES, CHIP 3.3K (1005) |
| R181 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R182 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R183 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R184 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R201 | 1-218-945-11 | s | RES, CHIP 220 (1005) |
| R202 | 1-218-945-11 | s | RES, CHIP 220 (1005) |
| R204 | 1-208-699-11 | s | RES, CHIP 4.7K (1005) |
| R206 | 1-208-715-11 | s | RES, CHIP 22K (1005) |
| R208 | 1-208-715-11 | s | RES, CHIP 22K (1005) |
| R209 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R210 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R211 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R212 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R213 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R214 | 1-208-891-81 | s | RES, CHIP 1.5K (1005) |
| R215 | 1-208-643-11 | s | RES, CHIP 22 (1005) |
| R216 | 1-208-643-11 | s | RES, CHIP 22 (1005) |
| R218 | 1-220-882-81 | s | RES, CHIP 33 (1005) |
| R219 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R220 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R221 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R222 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R223 | 1-208-867-81 | s | RES, CHIP 150 (1005) |

(MX-109 BOARD (SERVICE PARTS NO. SUFFIX B-))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R225 | 1-208-875-81 | s | RES, CHIP 330 (1005) |
| R226 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R227 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R230 | 1-208-711-11 | s | RES, CHIP 15K (1005) |
| R231 | 1-208-691-11 | s | RES, CHIP 2.2K (1005) |
| R232 | 1-208-703-11 | s | RES, CHIP 6.8K (1005) |
| R233 | 1-208-875-81 | s | RES, CHIP 330 (1005) |
| R234 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R236 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R237 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R238 | 1-218-977-81 | s | RES, CHIP 100K |
| R240 | 1-208-715-11 | s | RES, CHIP 22K (1005) |
| R241 | 1-218-977-81 | s | RES, CHIP 100K |
| R242 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R243 | 1-208-695-11 | s | RES, CHIP 3.3K (1005) |
| R244 | 1-208-891-81 | s | RES, CHIP 1.5K (1005) |
| R246 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R247 | 1-208-891-81 | s | RES, CHIP 1.5K (1005) |
| R248 | 1-218-977-81 | s | RES, CHIP 100K |
| R249 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R250 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R252 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R253 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R254 | 1-208-711-11 | s | RES, CHIP 15K (1005) |
| R255 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R256 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R257 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R258 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R259 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R260 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R261 | 1-208-699-11 | s | RES, CHIP 4.7K (1005) |
| R262 | 1-218-989-81 | s | RES, CHIP 1M |
| R263 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R264 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R265 | 1-218-981-81 | s | RES, CHIP 220K |
| R266 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R267 | 1-208-691-11 | s | RES, CHIP 2.2K (1005) |
| R268 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R269 | 1-208-699-11 | s | RES, CHIP 4.7K (1005) |
| R270 | 1-208-691-11 | s | RES, CHIP 2.2K (1005) |
| R271 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R272 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R273 | 1-208-691-11 | s | RES, CHIP 2.2K (1005) |
| R274 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R275 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R276 | 1-208-691-11 | s | RES, CHIP 2.2K (1005) |
| R277 | 1-208-875-81 | s | RES, CHIP 330 (1005) |
| R278 | 1-208-695-11 | s | RES, CHIP 3.3K (1005) |
| R279 | 1-208-699-11 | s | RES, CHIP 4.7K (1005) |
| R280 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R281 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R282 | 1-208-691-11 | s | RES, CHIP 2.2K (1005) |
| R283 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R284 | 1-208-695-11 | s | RES, CHIP 3.3K (1005) |
| R301 | 1-208-867-81 | s | RES, CHIP 150 (1005) |
| R302 | 1-208-867-81 | s | RES, CHIP 150 (1005) |
| R303 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R304 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R305 | 1-208-923-81 | s | RES, CHIP 33K (1005) |

(MX-109 BOARD (SERVICE PARTS NO. SUFFIX B-))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R306 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R307 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R308 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R309 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R310 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R311 | 1-208-699-11 | s | RES, CHIP 4.7K (1005) |
| R312 | 1-208-715-11 | s | RES, CHIP 22K (1005) |
| R313 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R314 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R315 | 1-218-945-11 | s | RES, CHIP 220 (1005) |
| R316 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R317 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R320 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R321 | 1-208-699-11 | s | RES, CHIP 4.7K (1005) |
| R322 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R323 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R324 | 1-208-699-11 | s | RES, CHIP 4.7K (1005) |
| R325 | 1-218-981-81 | s | RES, CHIP 220K |
| R326 | 1-208-699-11 | s | RES, CHIP 4.7K (1005) |
| R327 | 1-208-715-11 | s | RES, CHIP 22K (1005) |
| R328 | 1-208-715-11 | s | RES, CHIP 22K (1005) |
| R329 | 1-208-691-11 | s | RES, CHIP 2.2K (1005) |
| R330 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R331 | 1-208-699-11 | s | RES, CHIP 4.7K (1005) |
| R332 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R333 | 1-208-867-81 | s | RES, CHIP 150 (1005) |
| R334 | 1-208-867-81 | s | RES, CHIP 150 (1005) |
| RV201 | 1-225-789-21 | s | RES, ADJ, CERMET 2K |
| RV301 | 1-225-793-21 | s | RES, ADJ, CERMET 20K |
| RV302 | 1-225-789-21 | s | RES, ADJ, CERMET 2K |
| THP1 | ⚠ 1-533-817-21 | s | THERMISTOR |
| THP2 | ⚠ 1-533-817-21 | s | THERMISTOR |
| TP101 | 1-535-877-22 | s | CHIP, CHECKER |
| TP201 | 1-535-877-22 | s | CHIP, CHECKER |
| TP202 | 1-535-877-22 | s | CHIP, CHECKER |
| TP203 | 1-535-877-22 | s | CHIP, CHECKER |
| TP301 | 1-535-877-22 | s | CHIP, CHECKER |
| TP302 | 1-535-877-22 | s | CHIP, CHECKER |

PA-317 BOARD (SUFFIX 14)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| 1pc | A-1159-982-A | s | MOUNTED CIRCUIT BOARD, PA-317G (GOLD) |
| | A-1099-263-A | s | MOUNTED CIRCUIT BOARD, PA-317 (SILVER) |
| C106 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C107 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C108 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C109 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C110 | 1-135-646-11 | s | CAPACITOR,CHIP FILM 1MF 16V |
| C111 | 1-135-646-11 | s | CAPACITOR,CHIP FILM 1MF 16V |
| C112 | 1-135-646-11 | s | CAPACITOR,CHIP FILM 1MF 16V |
| C113 | 1-135-646-11 | s | CAPACITOR,CHIP FILM 1MF 16V |
| C114 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C115 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C116 | 1-165-908-11 | s | CAP, CERAMIC 1MF B 1608 |
| C117 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C118 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C119 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C121 | 1-165-908-11 | s | CAP, CERAMIC 1MF B 1608 |
| C122 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C123 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C124 | 1-165-908-11 | s | CAP, CERAMIC 1MF B 1608 |
| C125 | 1-165-908-11 | s | CAP, CERAMIC 1MF B 1608 |
| C126 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C127 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C128 | 1-165-871-11 | s | CAPACITOR,ELECT 22MF |
| C129 | 1-165-871-11 | s | CAPACITOR,ELECT 22MF |
| C130 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C131 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C132 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C133 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C135 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C136 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C138 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C139 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C140 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C141 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C142 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C145 | 1-164-845-11 | s | CAPACITOR,CERAMIC 5PF/16V(1005 |
| C146 | 1-165-908-11 | s | CAP, CERAMIC 1MF B 1608 |
| C147 | 1-165-871-11 | s | CAPACITOR,ELECT 22MF |
| C148 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C149 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C150 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C151 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C152 | 1-164-845-11 | s | CAPACITOR,CERAMIC 5PF/16V(1005 |
| C153 | 1-165-908-11 | s | CAP, CERAMIC 1MF B 1608 |
| C154 | 1-165-871-11 | s | CAPACITOR,ELECT 22MF |
| C155 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C156 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C157 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C158 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C159 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C160 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C161 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C162 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C163 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |

(PA-317 BOARD (SUFFIX 14))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C164 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C165 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C166 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C167 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C168 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C169 | 1-165-871-11 | s | CAPACITOR,ELECT 22MF |
| C170 | 1-165-908-11 | s | CAP, CERAMIC 1MF B 1608 |
| C171 | 1-165-871-11 | s | CAPACITOR,ELECT 22MF |
| C172 | 1-165-908-11 | s | CAP, CERAMIC 1MF B 1608 |
| C173 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C174 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C175 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C176 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C177 | 1-164-845-11 | s | CAPACITOR,CERAMIC 5PF/16V(1005 |
| C178 | 1-164-845-11 | s | CAPACITOR,CERAMIC 5PF/16V(1005 |
| C180 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C182 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C183 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C184 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C185 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C186 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C187 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C188 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C189 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C190 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C191 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C192 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C193 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C194 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C195 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C196 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C197 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C198 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C200 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C206 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C207 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C208 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C209 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C210 | 1-135-646-11 | s | CAPACITOR,CHIP FILM 1MF 16V |
| C211 | 1-135-646-11 | s | CAPACITOR,CHIP FILM 1MF 16V |
| C212 | 1-135-646-11 | s | CAPACITOR,CHIP FILM 1MF 16V |
| C213 | 1-135-646-11 | s | CAPACITOR,CHIP FILM 1MF 16V |
| C214 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C215 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C216 | 1-165-908-11 | s | CAP, CERAMIC 1MF B 1608 |
| C217 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C218 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C219 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C221 | 1-165-908-11 | s | CAP, CERAMIC 1MF B 1608 |
| C222 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C223 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C224 | 1-165-908-11 | s | CAP, CERAMIC 1MF B 1608 |
| C225 | 1-165-908-11 | s | CAP, CERAMIC 1MF B 1608 |
| C226 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C227 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C228 | 1-165-871-11 | s | CAPACITOR,ELECT 22MF |
| C229 | 1-165-871-11 | s | CAPACITOR,ELECT 22MF |
| C230 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C231 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |

(PA-317 BOARD (SUFFIX 14))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C232 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C233 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C235 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C236 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C238 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C239 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C240 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C241 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C242 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C245 | 1-164-845-11 | s | CAPACITOR,CERAMIC 5PF/16V(1005 |
| C246 | 1-165-908-11 | s | CAP, CERAMIC 1MF B 1608 |
| C247 | 1-165-871-11 | s | CAPACITOR,ELECT 22MF |
| C248 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C249 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C250 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C251 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C252 | 1-164-845-11 | s | CAPACITOR,CERAMIC 5PF/16V(1005 |
| C253 | 1-165-908-11 | s | CAP, CERAMIC 1MF B 1608 |
| C254 | 1-165-871-11 | s | CAPACITOR,ELECT 22MF |
| C255 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C256 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C257 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C258 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C259 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C260 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C261 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C262 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C263 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C264 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C265 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C266 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C267 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C268 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C269 | 1-165-871-11 | s | CAPACITOR,ELECT 22MF |
| C270 | 1-165-908-11 | s | CAP, CERAMIC 1MF B 1608 |
| C271 | 1-165-871-11 | s | CAPACITOR,ELECT 22MF |
| C272 | 1-165-908-11 | s | CAP, CERAMIC 1MF B 1608 |
| C273 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C274 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C275 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C276 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C277 | 1-164-845-11 | s | CAPACITOR,CERAMIC 5PF/16V(1005 |
| C278 | 1-164-845-11 | s | CAPACITOR,CERAMIC 5PF/16V(1005 |
| C280 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C282 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C283 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C284 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C285 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C286 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C287 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C288 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C289 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C290 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C291 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C292 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C293 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C294 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C295 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C296 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |

(PA-317 BOARD (SUFFIX 14))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C297 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C298 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C300 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C306 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C307 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C308 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C309 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C310 | 1-135-646-11 | s | CAPACITOR,CHIP FILM 1MF 16V |
| C311 | 1-135-646-11 | s | CAPACITOR,CHIP FILM 1MF 16V |
| C312 | 1-135-646-11 | s | CAPACITOR,CHIP FILM 1MF 16V |
| C313 | 1-135-646-11 | s | CAPACITOR,CHIP FILM 1MF 16V |
| C314 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C315 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C316 | 1-165-908-11 | s | CAP, CERAMIC 1MF B 1608 |
| C317 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C318 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C319 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C321 | 1-165-908-11 | s | CAP, CERAMIC 1MF B 1608 |
| C322 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C323 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C324 | 1-165-908-11 | s | CAP, CERAMIC 1MF B 1608 |
| C325 | 1-165-908-11 | s | CAP, CERAMIC 1MF B 1608 |
| C326 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C327 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C328 | 1-165-871-11 | s | CAPACITOR,ELECT 22MF |
| C329 | 1-165-871-11 | s | CAPACITOR,ELECT 22MF |
| C330 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C331 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C332 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C333 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C335 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C336 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C338 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C339 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C340 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C341 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C342 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C345 | 1-164-845-11 | s | CAPACITOR,CERAMIC 5PF/16V(1005 |
| C346 | 1-165-908-11 | s | CAP, CERAMIC 1MF B 1608 |
| C347 | 1-165-871-11 | s | CAPACITOR,ELECT 22MF |
| C348 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C349 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C350 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C351 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C352 | 1-164-845-11 | s | CAPACITOR,CERAMIC 5PF/16V(1005 |
| C353 | 1-165-908-11 | s | CAP, CERAMIC 1MF B 1608 |
| C354 | 1-165-871-11 | s | CAPACITOR,ELECT 22MF |
| C355 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C356 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C357 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C358 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C359 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C360 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C361 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C362 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C363 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C364 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C365 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C366 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |

(PA-317 BOARD (SUFFIX 14))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C367 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C368 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C369 | 1-165-871-11 | s | CAPACITOR,ELECT 22MF |
| C370 | 1-165-908-11 | s | CAP, CERAMIC 1MF B 1608 |
| C371 | 1-165-871-11 | s | CAPACITOR,ELECT 22MF |
| C372 | 1-165-908-11 | s | CAP, CERAMIC 1MF B 1608 |
| C373 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C374 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C375 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C376 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C377 | 1-164-845-11 | s | CAPACITOR,CERAMIC 5PF/16V(1005 |
| C378 | 1-164-845-11 | s | CAPACITOR,CERAMIC 5PF/16V(1005 |
| C380 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C382 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C383 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C384 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C385 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C386 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C387 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C388 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C389 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C390 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C391 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C392 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C393 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C394 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C395 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C396 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C397 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C398 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C400 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C401 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C402 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C403 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C404 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C405 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C406 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C407 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C408 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C409 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C410 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C411 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C412 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C413 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C414 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C415 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C416 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C417 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C418 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C419 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C420 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C423 | 1-165-884-91 | s | CAPACITOR, CERAMIC 2.2MF(1608) |
| C424 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C425 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C426 | 1-165-884-91 | s | CAPACITOR, CERAMIC 2.2MF(1608) |
| C427 | 1-126-395-11 | s | CAPACITOR,ELECT 22MF/16V(CHIP) |
| C428 | 1-126-391-11 | s | CAPACITOR ELECT 47MF/6.3V(105) |
| C429 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C430 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |

(PA-317 BOARD (SUFFIX 14))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C431 | 1-165-884-91 | s | CAPACITOR, CERAMIC 2.2MF(1608) |
| C432 | 1-165-884-91 | s | CAPACITOR, CERAMIC 2.2MF(1608) |
| C433 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C434 | 1-165-884-91 | s | CAPACITOR, CERAMIC 2.2MF(1608) |
| C435 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C436 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C437 | 1-165-881-21 | s | CAPACITOR, ELECT 120MF(6.3X6) |
| C438 | 1-165-881-21 | s | CAPACITOR, ELECT 120MF(6.3X6) |
| C439 | 1-165-884-91 | s | CAPACITOR, CERAMIC 2.2MF(1608) |
| C440 | 1-126-395-11 | s | CAPACITOR,ELECT 22MF/16V(CHIP) |
| C441 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C442 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C443 | 1-165-884-91 | s | CAPACITOR, CERAMIC 2.2MF(1608) |
| C444 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C445 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C446 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C447 | 1-165-881-21 | s | CAPACITOR, ELECT 120MF(6.3X6) |
| C448 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C449 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C450 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C452 | 1-164-858-11 | s | CAPACITOR,CERAMIC 22PF/50V |
| C453 | 1-164-858-11 | s | CAPACITOR,CERAMIC 22PF/50V |
| C464 | 1-164-858-11 | s | CAPACITOR,CERAMIC 22PF/50V |
| CN101 | 1-785-900-11 | s | CONNECTOR |
| CN201 | 1-785-900-11 | s | CONNECTOR |
| CN301 | 1-785-900-11 | s | CONNECTOR |
| CN401 | 1-770-454-21 | o | CONNECTOR, BOARD TO BOARD 70P |
| CN402 | 1-779-522-31 | s | CONNECTOR, FFC/FPC(ZIF) AN 40P (GOLD) |
| E401 | 1-535-877-22 | s | CHIP,CHECKER (TEST POINT) |
| FL101 | 1-813-545-11 | s | FILTER, LOW PASS (37MHZ) |
| FL102 | 1-813-541-11 | s | FILTER, LOW PASS |
| FL103 | 1-813-545-11 | s | FILTER, LOW PASS (37MHZ) |
| FL201 | 1-813-545-11 | s | FILTER, LOW PASS (37MHZ) |
| FL202 | 1-813-541-11 | s | FILTER, LOW PASS |
| FL203 | 1-813-545-11 | s | FILTER, LOW PASS (37MHZ) |
| FL301 | 1-813-545-11 | s | FILTER, LOW PASS (37MHZ) |
| FL302 | 1-813-541-11 | s | FILTER, LOW PASS |
| FL303 | 1-813-545-11 | s | FILTER, LOW PASS (37MHZ) |
| IC101 | 6-706-863-01 | s | IC LMH6732MFX/NOPB |
| IC102 | 6-706-863-01 | s | IC LMH6732MFX/NOPB |
| IC108 | 8-759-561-46 | s | IC AD8014ART-REEL7 |
| IC109 | 8-759-561-46 | s | IC AD8014ART-REEL7 |
| IC110 | 8-759-561-46 | s | IC AD8014ART-REEL7 |
| IC111 | 6-706-863-01 | s | IC LMH6732MFX/NOPB |
| IC112 | 6-706-863-01 | s | IC LMH6732MFX/NOPB |
| IC201 | 6-706-863-01 | s | IC LMH6732MFX/NOPB |
| IC202 | 6-706-863-01 | s | IC LMH6732MFX/NOPB |
| IC208 | 8-759-561-46 | s | IC AD8014ART-REEL7 |
| IC209 | 8-759-561-46 | s | IC AD8014ART-REEL7 |
| IC210 | 8-759-561-46 | s | IC AD8014ART-REEL7 |
| IC211 | 6-706-863-01 | s | IC LMH6732MFX/NOPB |
| IC212 | 6-706-863-01 | s | IC LMH6732MFX/NOPB |
| IC301 | 6-706-863-01 | s | IC LMH6732MFX/NOPB |
| IC302 | 6-706-863-01 | s | IC LMH6732MFX/NOPB |
| IC308 | 8-759-561-46 | s | IC AD8014ART-REEL7 |
| IC309 | 8-759-561-46 | s | IC AD8014ART-REEL7 |
| IC310 | 8-759-561-46 | s | IC AD8014ART-REEL7 |
| IC311 | 6-706-863-01 | s | IC LMH6732MFX/NOPB |

(PA-317 BOARD (SUFFIX 14))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| IC312 | 6-706-863-01 | s | IC LMH6732MFX/NOPB |
| IC401 | 8-759-592-47 | s | IC TC7SZ08FU(TE85R) |
| IC402 | 8-759-592-47 | s | IC TC7SZ08FU(TE85R) |
| IC403 | 8-759-592-47 | s | IC TC7SZ08FU(TE85R) |
| IC404 | 8-759-592-47 | s | IC TC7SZ08FU(TE85R) |
| IC405 | 8-759-592-47 | s | IC TC7SZ08FU(TE85R) |
| IC406 | 8-759-592-47 | s | IC TC7SZ08FU(TE85R) |
| IC407 | 8-759-592-47 | s | IC TC7SZ08FU(TE85R) |
| IC408 | 8-759-592-47 | s | IC TC7SZ08FU(TE85R) |
| IC409 | 8-759-592-47 | s | IC TC7SZ08FU(TE85R) |
| IC410 | 8-759-592-47 | s | IC TC7SZ08FU(TE85R) |
| IC411 | 8-759-592-47 | s | IC TC7SZ08FU(TE85R) |
| IC412 | 8-759-592-47 | s | IC TC7SZ08FU(TE85R) |
| IC413 | 8-759-592-47 | s | IC TC7SZ08FU(TE85R) |
| IC414 | 8-759-592-47 | s | IC TC7SZ08FU(TE85R) |
| IC415 | 8-759-592-47 | s | IC TC7SZ08FU(TE85R) |
| IC416 | 8-759-592-47 | s | IC TC7SZ08FU(TE85R) |
| IC417 | 8-759-592-47 | s | IC TC7SZ08FU(TE85R) |
| IC418 | 8-759-592-47 | s | IC TC7SZ08FU(TE85R) |
| IC419 | 8-759-685-33 | s | IC BU2500FV-E2 |
| IC420 | 8-759-685-33 | s | IC BU2500FV-E2 |
| IC421 | 6-704-976-01 | s | IC ADR381ART-REEL7 |
| IC422 | 8-759-685-33 | s | IC BU2500FV-E2 |
| IC423 | 8-759-685-33 | s | IC BU2500FV-E2 |
| IC424 | 8-759-592-47 | s | IC TC7SZ08FU(TE85R) |
| IC425 | 8-759-592-47 | s | IC TC7SZ08FU(TE85R) |
| IC426 | 8-759-327-01 | s | IC NJM062V-TE2 |
| IC427 | 8-759-327-01 | s | IC NJM062V-TE2 |
| IC428 | 8-759-592-47 | s | IC TC7SZ08FU(TE85R) |
| IC429 | 8-759-592-47 | s | IC TC7SZ08FU(TE85R) |
| IC430 | 8-759-592-47 | s | IC TC7SZ08FU(TE85R) |
| L101 | 1-414-751-11 | s | INDUCTOR 1.0UH |
| L102 | 1-414-751-11 | s | INDUCTOR 1.0UH |
| L201 | 1-414-751-11 | s | INDUCTOR 1.0UH |
| L202 | 1-414-751-11 | s | INDUCTOR 1.0UH |
| L301 | 1-414-751-11 | s | INDUCTOR 1.0UH |
| L302 | 1-414-751-11 | s | INDUCTOR 1.0UH |
| L401 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |
| L402 | 1-414-394-11 | s | INDUCTOR (SMD) 2.2UH |
| L403 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |
| L404 | 1-416-344-11 | s | COIL, CHOKE 10UH |
| Q401 | 8-729-143-13 | s | TRANSISTOR 2SC4176-B34 |
| Q402 | 8-729-143-07 | s | TRANSISTOR 2SA1610-Y33 |
| Q403 | 8-729-230-27 | s | TRANSISTOR 2SA1213Y-TE12L |
| Q404 | 8-729-807-51 | s | TRANSISTOR 2SD1623-S |
| Q405 | 8-729-143-13 | s | TRANSISTOR 2SC4176-B34 |
| Q406 | 8-729-230-27 | s | TRANSISTOR 2SA1213Y-TE12L |
| R104 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R105 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R106 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R107 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R109 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R110 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R111 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R112 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R113 | 1-208-687-11 | s | RESISTOR CHIP 1.5K 1/16W (1005 |
| R114 | 1-208-687-11 | s | RESISTOR CHIP 1.5K 1/16W (1005 |

(PA-317 BOARD (SUFFIX 14))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R115 | 1-218-849-11 | s | RESISTOR,CHIP 1.2K 1/10W(1608) |
| R116 | 1-208-699-11 | s | RESISTOR,CHIP 4.7K 1/16W(1005) |
| R117 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R118 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R119 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R120 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R121 | 1-218-849-11 | s | RESISTOR,CHIP 1.2K 1/10W(1608) |
| R122 | 1-208-699-11 | s | RESISTOR,CHIP 4.7K 1/16W(1005) |
| R123 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R124 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R125 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R126 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R127 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R128 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R129 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R130 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R131 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R132 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R133 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R134 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R135 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R136 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R137 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R138 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R139 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R141 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R142 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R143 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R144 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R145 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R146 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R147 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R148 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R149 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R150 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R151 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R152 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R153 | 1-208-675-11 | s | RESISTOR CHIP 470 1/16W (1005) |
| R155 | 1-208-675-11 | s | RESISTOR CHIP 470 1/16W (1005) |
| R157 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R158 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R159 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R160 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R161 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R162 | 1-208-671-11 | s | RESISTOR CHIP 330 1/16W (1005) |
| R163 | 1-208-675-11 | s | RESISTOR CHIP 470 1/16W (1005) |
| R164 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R165 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R166 | 1-208-675-11 | s | RESISTOR CHIP 470 1/16W (1005) |
| R168 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R169 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R170 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R171 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R172 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R173 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R174 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R175 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R176 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R177 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |

(PA-317 BOARD (SUFFIX 14))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R178 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R179 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R180 | 1-208-671-11 | s | RESISTOR CHIP 330 1/16W (1005) |
| R181 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R182 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R183 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R184 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R187 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R188 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R189 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R190 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R204 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R205 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R206 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R207 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R209 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R210 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R211 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R212 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R213 | 1-208-687-11 | s | RESISTOR CHIP 1.5K 1/16W (1005 |
| R214 | 1-208-687-11 | s | RESISTOR CHIP 1.5K 1/16W (1005 |
| R215 | 1-218-849-11 | s | RESISTOR,CHIP 1.2K 1/10W(1608) |
| R216 | 1-208-699-11 | s | RESISTOR,CHIP 4.7K 1/16W(1005) |
| R217 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R218 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R219 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R220 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R221 | 1-218-849-11 | s | RESISTOR,CHIP 1.2K 1/10W(1608) |
| R222 | 1-208-699-11 | s | RESISTOR,CHIP 4.7K 1/16W(1005) |
| R223 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R224 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R225 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R226 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R227 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R228 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R229 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R230 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R231 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R232 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R233 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R234 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R235 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R236 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R237 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R238 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R239 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R241 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R242 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R243 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R244 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R245 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R246 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R247 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R248 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R249 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R250 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R251 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R252 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R253 | 1-208-675-11 | s | RESISTOR CHIP 470 1/16W (1005) |

(PA-317 BOARD (SUFFIX 14))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R255 | 1-208-675-11 | s | RESISTOR CHIP 470 1/16W (1005) |
| R257 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R258 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R259 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R260 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R261 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R262 | 1-208-671-11 | s | RESISTOR CHIP 330 1/16W (1005) |
| R263 | 1-208-675-11 | s | RESISTOR CHIP 470 1/16W (1005) |
| R264 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R265 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R266 | 1-208-675-11 | s | RESISTOR CHIP 470 1/16W (1005) |
| R268 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R269 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R270 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R271 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R272 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R273 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R274 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R275 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R276 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R277 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R278 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R279 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R280 | 1-208-671-11 | s | RESISTOR CHIP 330 1/16W (1005) |
| R281 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R282 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R283 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R284 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R287 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R288 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R289 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R290 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R304 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R305 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R306 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R307 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R309 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R310 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R311 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R312 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R313 | 1-208-687-11 | s | RESISTOR CHIP 1.5K 1/16W (1005 |
| R314 | 1-208-687-11 | s | RESISTOR CHIP 1.5K 1/16W (1005 |
| R315 | 1-218-849-11 | s | RESISTOR,CHIP 1.2K 1/10W(1608) |
| R316 | 1-208-699-11 | s | RESISTOR,CHIP 4.7K 1/16W(1005) |
| R317 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R318 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R319 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R320 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R321 | 1-218-849-11 | s | RESISTOR,CHIP 1.2K 1/10W(1608) |
| R322 | 1-208-699-11 | s | RESISTOR,CHIP 4.7K 1/16W(1005) |
| R323 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R324 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R325 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R326 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R327 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R328 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R329 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R330 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R331 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |

(PA-317 BOARD (SUFFIX 14))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R332 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R333 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R334 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R335 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R336 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R337 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R338 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R339 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R341 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R342 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R343 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R344 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R345 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R346 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R347 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R348 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R349 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R350 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R351 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R352 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R353 | 1-208-675-11 | s | RESISTOR CHIP 470 1/16W (1005) |
| R355 | 1-208-675-11 | s | RESISTOR CHIP 470 1/16W (1005) |
| R357 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R358 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R359 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R360 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R361 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R362 | 1-208-671-11 | s | RESISTOR CHIP 330 1/16W (1005) |
| R363 | 1-208-675-11 | s | RESISTOR CHIP 470 1/16W (1005) |
| R364 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R365 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R366 | 1-208-675-11 | s | RESISTOR CHIP 470 1/16W (1005) |
| R368 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R369 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R370 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R371 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R372 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R373 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R374 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R375 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R376 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R377 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R378 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R379 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R380 | 1-208-671-11 | s | RESISTOR CHIP 330 1/16W (1005) |
| R381 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R382 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R383 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R384 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R387 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R388 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R389 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R390 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R401 | 1-208-643-11 | s | RESISTOR CHIP 22 1/16W (1005) |
| R402 | 1-208-643-11 | s | RESISTOR CHIP 22 1/16W (1005) |
| R403 | 1-208-643-11 | s | RESISTOR CHIP 22 1/16W (1005) |
| R404 | 1-208-643-11 | s | RESISTOR CHIP 22 1/16W (1005) |
| R405 | 1-208-643-11 | s | RESISTOR CHIP 22 1/16W (1005) |
| R406 | 1-208-643-11 | s | RESISTOR CHIP 22 1/16W (1005) |

(PA-317 BOARD (SUFFIX 14))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R407 | 1-208-643-11 | s | RESISTOR CHIP 22 1/16W (1005) |
| R408 | 1-208-643-11 | s | RESISTOR CHIP 22 1/16W (1005) |
| R409 | 1-208-643-11 | s | RESISTOR CHIP 22 1/16W (1005) |
| R410 | 1-208-643-11 | s | RESISTOR CHIP 22 1/16W (1005) |
| R411 | 1-208-643-11 | s | RESISTOR CHIP 22 1/16W (1005) |
| R412 | 1-208-643-11 | s | RESISTOR CHIP 22 1/16W (1005) |
| R413 | 1-208-643-11 | s | RESISTOR CHIP 22 1/16W (1005) |
| R414 | 1-208-643-11 | s | RESISTOR CHIP 22 1/16W (1005) |
| R415 | 1-208-643-11 | s | RESISTOR CHIP 22 1/16W (1005) |
| R416 | 1-208-643-11 | s | RESISTOR CHIP 22 1/16W (1005) |
| R417 | 1-208-643-11 | s | RESISTOR CHIP 22 1/16W (1005) |
| R418 | 1-208-643-11 | s | RESISTOR CHIP 22 1/16W (1005) |
| R419 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R420 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R421 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R422 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R423 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R424 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R425 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R426 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R427 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R428 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R429 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R430 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R431 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R432 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R433 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R435 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R436 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R437 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R438 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R439 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R440 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R441 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R442 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R443 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R444 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R445 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R446 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R447 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R448 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R449 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R450 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R451 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R452 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R453 | 1-208-699-11 | s | RESISTOR,CHIP 4.7K 1/16W(1005) |
| R454 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R455 | 1-208-699-11 | s | RESISTOR,CHIP 4.7K 1/16W(1005) |
| R456 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R457 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R458 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R459 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R460 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R461 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R462 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R463 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R464 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R465 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R466 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |

(PA-317 BOARD (SUFFIX 14))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R467 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R468 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R469 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R470 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R471 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R472 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R473 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R474 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R475 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R476 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R477 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R478 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R479 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R480 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R481 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R482 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R483 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R484 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R485 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R486 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R487 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R488 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R489 | 1-208-905-11 | s | RESISTOR, CHIP 5.6K (1005) |
| R490 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R491 | 1-208-699-11 | s | RESISTOR,CHIP 4.7K 1/16W(1005) |
| R492 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R493 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R494 | 1-208-643-11 | s | RESISTOR CHIP 22 1/16W (1005) |
| R495 | 1-208-643-11 | s | RESISTOR CHIP 22 1/16W (1005) |
| R496 | 1-208-643-11 | s | RESISTOR CHIP 22 1/16W (1005) |
| R497 | 1-208-643-11 | s | RESISTOR CHIP 22 1/16W (1005) |
| R498 | 1-208-643-11 | s | RESISTOR CHIP 22 1/16W (1005) |
| R499 | 1-208-643-11 | s | RESISTOR CHIP 22 1/16W (1005) |
| R500 | 1-208-643-11 | s | RESISTOR CHIP 22 1/16W (1005) |
| R501 | 1-208-643-11 | s | RESISTOR CHIP 22 1/16W (1005) |
| R502 | 1-208-643-11 | s | RESISTOR CHIP 22 1/16W (1005) |
| R503 | 1-208-643-11 | s | RESISTOR CHIP 22 1/16W (1005) |
| R504 | 1-208-643-11 | s | RESISTOR CHIP 22 1/16W (1005) |
| R505 | 1-208-643-11 | s | RESISTOR CHIP 22 1/16W (1005) |
| R506 | 1-208-643-11 | s | RESISTOR CHIP 22 1/16W (1005) |
| R507 | 1-208-643-11 | s | RESISTOR CHIP 22 1/16W (1005) |
| R508 | 1-208-643-11 | s | RESISTOR CHIP 22 1/16W (1005) |
| R509 | 1-208-643-11 | s | RESISTOR CHIP 22 1/16W (1005) |
| R510 | 1-208-643-11 | s | RESISTOR CHIP 22 1/16W (1005) |
| R511 | 1-208-643-11 | s | RESISTOR CHIP 22 1/16W (1005) |
| R512 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| RV101 | 1-227-405-21 | s | RES, ADJ, CERMET 220 |
| RV102 | 1-227-405-21 | s | RES, ADJ, CERMET 220 |
| RV103 | 1-227-405-21 | s | RES, ADJ, CERMET 220 |
| RV201 | 1-227-405-21 | s | RES, ADJ, CERMET 220 |
| RV202 | 1-227-405-21 | s | RES, ADJ, CERMET 220 |
| RV203 | 1-227-405-21 | s | RES, ADJ, CERMET 220 |
| RV301 | 1-227-405-21 | s | RES, ADJ, CERMET 220 |
| RV302 | 1-227-405-21 | s | RES, ADJ, CERMET 220 |
| RV303 | 1-227-405-21 | s | RES, ADJ, CERMET 220 |

---

PA-317 BOARD (SUFFIX 21-)

---

*1: [Board No. suffix 21]
*2: [Board No. suffix 22-]

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| 1pc | A-1159-982-A | s | MOUNTED CIRCUIT BOARD, PA-317G |
| C101 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C102 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C103 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C106 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C107 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C108 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C109 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C110 | 1-135-646-91 | s | CAP, CHIP FILM 1MF |
| C111 | 1-135-646-91 | s | CAP, CHIP FILM 1MF |
| C112 | 1-135-646-91 | s | CAP, CHIP FILM 1MF |
| C113 | 1-135-646-91 | s | CAP, CHIP FILM 1MF |
| C114 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C115 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C116 | 1-165-908-91 | s | CAP, CERAMIC 1000000PF B 1608 |
| C117 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C118 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C119 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C120 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C121 | 1-165-908-91 | s | CAP, CERAMIC 1000000PF B 1608 |
| C122 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C123 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C124 | 1-165-908-91 | s | CAP, CERAMIC 1000000PF B 1608 |
| C125 | 1-165-908-91 | s | CAP, CERAMIC 1000000PF B 1608 |
| C126 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C127 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C128 | 1-165-871-21 | s | CAP, ELECT 22MF (4.0X5.5) |
| C129 | 1-165-871-21 | s | CAP, ELECT 22MF (4.0X5.5) |
| C130 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C131 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C132 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C133 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C135 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C136 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C137 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C138 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C139 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C140 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C141 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C142 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C145 | 1-164-845-81 | s | CAP, CHIP CERAMIC 5PF CH 1005 |
| C146 | 1-165-908-91 | s | CAP, CERAMIC 1000000PF B 1608 |
| C147 | 1-165-871-21 | s | CAP, ELECT 22MF (4.0X5.5) |
| C148 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C149 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C150 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C151 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C152 | 1-164-845-81 | s | CAP, CHIP CERAMIC 5PF CH 1005 |
| C153 | 1-165-908-91 | s | CAP, CERAMIC 1000000PF B 1608 |
| C154 | 1-165-871-21 | s | CAP, ELECT 22MF (4.0X5.5) |
| C155 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C156 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C157 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C158 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C159 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C160 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |

(PA-317 BOARD (SUFFIX 21-))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C161 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C162 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C163 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C164 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C165 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C166 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C167 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C168 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C169 | 1-165-871-21 | s | CAP, ELECT 22MF (4.0X5.5) |
| C170 | 1-165-908-91 | s | CAP, CERAMIC 1000000PF B 1608 |
| C171 | 1-165-871-21 | s | CAP, ELECT 22MF (4.0X5.5) |
| C172 | 1-165-908-91 | s | CAP, CERAMIC 1000000PF B 1608 |
| C173 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C174 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C175 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C176 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C177 | 1-164-845-81 | s | CAP, CHIP CERAMIC 5PF CH 1005 |
| C178 | 1-164-845-81 | s | CAP, CHIP CERAMIC 5PF CH 1005 |
| C180 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C182 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C183 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C184 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C185 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C186 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C187 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C188 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C189 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C190 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C191 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C192 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C193 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C194 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C195 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C196 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C197 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C198 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C200 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C201 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C202 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C203 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C206 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C207 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C208 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C209 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C210 | 1-135-646-91 | s | CAP, CHIP FILM 1MF |
| C211 | 1-135-646-91 | s | CAP, CHIP FILM 1MF |
| C212 | 1-135-646-91 | s | CAP, CHIP FILM 1MF |
| C213 | 1-135-646-91 | s | CAP, CHIP FILM 1MF |
| C214 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C215 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C216 | 1-165-908-91 | s | CAP, CERAMIC 1000000PF B 1608 |
| C217 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C218 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C219 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C220 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C221 | 1-165-908-91 | s | CAP, CERAMIC 1000000PF B 1608 |
| C222 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C223 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C224 | 1-165-908-91 | s | CAP, CERAMIC 1000000PF B 1608 |
| C225 | 1-165-908-91 | s | CAP, CERAMIC 1000000PF B 1608 |

(PA-317 BOARD (SUFFIX 21-))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C226 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C227 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C228 | 1-165-871-21 | s | CAP, ELECT 22MF (4.0X5.5) |
| C229 | 1-165-871-21 | s | CAP, ELECT 22MF (4.0X5.5) |
| C230 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C231 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C232 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C233 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C235 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C236 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C237 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C238 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C239 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C240 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C241 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C242 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C245 | 1-164-845-81 | s | CAP, CHIP CERAMIC 5PF CH 1005 |
| C246 | 1-165-908-91 | s | CAP, CERAMIC 1000000PF B 1608 |
| C247 | 1-165-871-21 | s | CAP, ELECT 22MF (4.0X5.5) |
| C248 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C249 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C250 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C251 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C252 | 1-164-845-81 | s | CAP, CHIP CERAMIC 5PF CH 1005 |
| C253 | 1-165-908-91 | s | CAP, CERAMIC 1000000PF B 1608 |
| C254 | 1-165-871-21 | s | CAP, ELECT 22MF (4.0X5.5) |
| C255 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C256 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C257 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C258 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C259 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C260 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C261 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C262 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C263 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C264 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C265 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C266 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C267 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C268 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C269 | 1-165-871-21 | s | CAP, ELECT 22MF (4.0X5.5) |
| C270 | 1-165-908-91 | s | CAP, CERAMIC 1000000PF B 1608 |
| C271 | 1-165-871-21 | s | CAP, ELECT 22MF (4.0X5.5) |
| C272 | 1-165-908-91 | s | CAP, CERAMIC 1000000PF B 1608 |
| C273 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C274 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C275 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C276 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C277 | 1-164-845-81 | s | CAP, CHIP CERAMIC 5PF CH 1005 |
| C278 | 1-164-845-81 | s | CAP, CHIP CERAMIC 5PF CH 1005 |
| C280 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C282 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C283 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C284 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C285 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C286 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C287 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C288 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C289 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C290 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |

(PA-317 BOARD (SUFFIX 21-))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C291 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C292 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C293 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C294 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C295 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C296 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C297 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C298 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C300 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C301 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C302 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C303 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C306 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C307 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C308 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C309 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C310 | 1-135-646-91 | s | CAP, CHIP FILM 1MF |
| C311 | 1-135-646-91 | s | CAP, CHIP FILM 1MF |
| C312 | 1-135-646-91 | s | CAP, CHIP FILM 1MF |
| C313 | 1-135-646-91 | s | CAP, CHIP FILM 1MF |
| C314 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C315 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C316 | 1-165-908-91 | s | CAP, CERAMIC 1000000PF B 1608 |
| C317 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C318 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C319 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C320 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C321 | 1-165-908-91 | s | CAP, CERAMIC 1000000PF B 1608 |
| C322 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C323 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C324 | 1-165-908-91 | s | CAP, CERAMIC 1000000PF B 1608 |
| C325 | 1-165-908-91 | s | CAP, CERAMIC 1000000PF B 1608 |
| C326 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C327 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C328 | 1-165-871-21 | s | CAP, ELECT 22MF (4.0X5.5) |
| C329 | 1-165-871-21 | s | CAP, ELECT 22MF (4.0X5.5) |
| C330 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C331 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C332 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C333 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C335 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C336 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C337 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C338 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C339 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C340 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C341 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C342 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C345 | 1-164-845-81 | s | CAP, CHIP CERAMIC 5PF CH 1005 |
| C346 | 1-165-908-91 | s | CAP, CERAMIC 1000000PF B 1608 |
| C347 | 1-165-871-21 | s | CAP, ELECT 22MF (4.0X5.5) |
| C348 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C349 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C350 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C351 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C352 | 1-164-845-81 | s | CAP, CHIP CERAMIC 5PF CH 1005 |
| C353 | 1-165-908-91 | s | CAP, CERAMIC 1000000PF B 1608 |
| C354 | 1-165-871-21 | s | CAP, ELECT 22MF (4.0X5.5) |
| C355 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |

(PA-317 BOARD (SUFFIX 21-))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C356 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C357 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C358 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C359 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C360 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C361 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C362 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C363 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C364 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C365 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C366 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C367 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C368 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C369 | 1-165-871-21 | s | CAP, ELECT 22MF (4.0X5.5) |
| C370 | 1-165-908-91 | s | CAP, CERAMIC 1000000PF B 1608 |
| C371 | 1-165-871-21 | s | CAP, ELECT 22MF (4.0X5.5) |
| C372 | 1-165-908-91 | s | CAP, CERAMIC 1000000PF B 1608 |
| C373 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C374 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C375 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C376 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C377 | 1-164-845-81 | s | CAP, CHIP CERAMIC 5PF CH 1005 |
| C378 | 1-164-845-81 | s | CAP, CHIP CERAMIC 5PF CH 1005 |
| C380 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C382 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C383 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C384 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C385 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C386 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C387 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C388 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C389 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C390 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C391 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C392 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C393 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C394 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C395 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C396 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C397 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C398 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C400 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C401 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C402 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C403 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C404 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C405 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C406 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C407 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C408 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C409 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C410 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C411 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C412 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C413 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C414 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C415 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C416 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C417 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |

(PA-317 BOARD (SUFFIX 21-))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C418 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C419 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C420 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C423 | 1-165-884-91 | s | CAP, CERAMIC 2.2MF (1608) |
| C424 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C425 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C426 | 1-165-884-91 | s | CAP, CERAMIC 2.2MF (1608) |
| C427 | 1-126-395-21 | s | CAP, CHIP ELECT 22MF (5X5.7) |
| C428 | 1-126-391-21 | s | CAP, CHIP ELECT 47MF (5X5.7) |
| C429 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C430 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C431 | 1-165-884-91 | s | CAP, CERAMIC 2.2MF (1608) |
| C432 | 1-165-884-91 | s | CAP, CERAMIC 2.2MF (1608) |
| C433 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C434 | 1-165-884-91 | s | CAP, CERAMIC 2.2MF (1608) |
| C435 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C436 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C437 | 1-165-903-21 | s | CAP, ELECT 120MF (6.3X6) |
| C438 | 1-165-903-21 | s | CAP, ELECT 120MF (6.3X6) |
| C439 | 1-165-884-91 | s | CAP, CERAMIC 2.2MF (1608) |
| C440 | 1-126-395-21 | s | CAP, CHIP ELECT 22MF (5X5.7) |
| C441 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C442 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C443 *1 | 1-165-884-91 | s | CAP, CERAMIC 2.2MF (1608) |
| *2 | 1-162-927-91 | s | CAP, CERAMIC 100PF CH 1608 |
| C444 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C445 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C446 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C447 | 1-165-903-21 | s | CAP, ELECT 120MF (6.3X6) |
| C448 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C449 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C450 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C452 | 1-164-858-81 | s | CAP, CHIP CERAMIC 22PF CH 1005 |
| C453 | 1-164-858-81 | s | CAP, CHIP CERAMIC 22PF CH 1005 |
| C464 | 1-164-858-81 | s | CAP, CHIP CERAMIC 22PF CH 1005 |
| CN101 | 1-785-900-21 | s | CONNECTOR 5P |
| CN201 | 1-785-900-21 | s | CONNECTOR 5P |
| CN301 | 1-785-900-21 | s | CONNECTOR 5P |
| CN401 | 1-770-454-21 | o | CONNECTOR, BOARD TO BOARD 70P |
| CN402 | 1-779-522-31 | s | CONNECTOR, FFC/FPC(ZIF) AN 40P |
| E401 | 1-535-877-22 | s | CHIP, CHECKER |
| FL101 | 1-813-545-11 | s | FILTER, LOW PASS (37MHZ) |
| FL102 | 1-813-541-11 | s | FILTER, LOW PASS |
| FL103 | 1-813-545-11 | s | FILTER, LOW PASS (37MHZ) |
| FL201 | 1-813-545-11 | s | FILTER, LOW PASS (37MHZ) |
| FL202 | 1-813-541-11 | s | FILTER, LOW PASS |
| FL203 | 1-813-545-11 | s | FILTER, LOW PASS (37MHZ) |
| FL301 | 1-813-545-11 | s | FILTER, LOW PASS (37MHZ) |
| FL302 | 1-813-541-11 | s | FILTER, LOW PASS |
| FL303 | 1-813-545-11 | s | FILTER, LOW PASS (37MHZ) |
| IC101 | 6-706-863-01 | s | IC LMH6732MFX/NOPB |
| IC102 | 6-706-863-01 | s | IC LMH6732MFX/NOPB |
| IC106 | 8-753-261-02 | s | IC CXA3648AR-T4 |
| IC107 | 8-753-261-02 | s | IC CXA3648AR-T4 |
| IC108 | 8-759-561-46 | s | IC AD8014ARTZ-REEL7 |
| IC109 | 8-759-561-46 | s | IC AD8014ARTZ-REEL7 |
| IC110 | 8-759-561-46 | s | IC AD8014ARTZ-REEL7 |
| IC111 | 6-706-863-01 | s | IC LMH6732MFX/NOPB |

(PA-317 BOARD (SUFFIX 21-))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| IC112 | 6-706-863-01 | s | IC LMH6732MFX/NOPB |
| IC201 | 6-706-863-01 | s | IC LMH6732MFX/NOPB |
| IC202 | 6-706-863-01 | s | IC LMH6732MFX/NOPB |
| IC206 | 8-753-261-02 | s | IC CXA3648AR-T4 |
| IC207 | 8-753-261-02 | s | IC CXA3648AR-T4 |
| IC208 | 8-759-561-46 | s | IC AD8014ARTZ-REEL7 |
| IC209 | 8-759-561-46 | s | IC AD8014ARTZ-REEL7 |
| IC210 | 8-759-561-46 | s | IC AD8014ARTZ-REEL7 |
| IC211 | 6-706-863-01 | s | IC LMH6732MFX/NOPB |
| IC212 | 6-706-863-01 | s | IC LMH6732MFX/NOPB |
| IC301 | 6-706-863-01 | s | IC LMH6732MFX/NOPB |
| IC302 | 6-706-863-01 | s | IC LMH6732MFX/NOPB |
| IC306 | 8-753-261-02 | s | IC CXA3648AR-T4 |
| IC307 | 8-753-261-02 | s | IC CXA3648AR-T4 |
| IC308 | 8-759-561-46 | s | IC AD8014ARTZ-REEL7 |
| IC309 | 8-759-561-46 | s | IC AD8014ARTZ-REEL7 |
| IC310 | 8-759-561-46 | s | IC AD8014ARTZ-REEL7 |
| IC311 | 6-706-863-01 | s | IC LMH6732MFX/NOPB |
| IC312 | 6-706-863-01 | s | IC LMH6732MFX/NOPB |
| IC401 | 8-759-592-47 | s | IC TC7SZ08FU(TE85R) |
| IC402 | 8-759-592-47 | s | IC TC7SZ08FU(TE85R) |
| IC403 | 8-759-592-47 | s | IC TC7SZ08FU(TE85R) |
| IC404 | 8-759-592-47 | s | IC TC7SZ08FU(TE85R) |
| IC405 | 8-759-592-47 | s | IC TC7SZ08FU(TE85R) |
| IC406 | 8-759-592-47 | s | IC TC7SZ08FU(TE85R) |
| IC407 | 8-759-592-47 | s | IC TC7SZ08FU(TE85R) |
| IC408 | 8-759-592-47 | s | IC TC7SZ08FU(TE85R) |
| IC409 | 8-759-592-47 | s | IC TC7SZ08FU(TE85R) |
| IC410 | 8-759-592-47 | s | IC TC7SZ08FU(TE85R) |
| IC411 | 8-759-592-47 | s | IC TC7SZ08FU(TE85R) |
| IC412 | 8-759-592-47 | s | IC TC7SZ08FU(TE85R) |
| IC413 | 8-759-592-47 | s | IC TC7SZ08FU(TE85R) |
| IC414 | 8-759-592-47 | s | IC TC7SZ08FU(TE85R) |
| IC415 | 8-759-592-47 | s | IC TC7SZ08FU(TE85R) |
| IC416 | 8-759-592-47 | s | IC TC7SZ08FU(TE85R) |
| IC417 | 8-759-592-47 | s | IC TC7SZ08FU(TE85R) |
| IC418 | 8-759-592-47 | s | IC TC7SZ08FU(TE85R) |
| IC419 | 8-759-685-34 | s | IC M62352AGP-D60Q |
| IC420 | 8-759-685-34 | s | IC M62352AGP-D60Q |
| IC421 | 6-704-976-01 | s | IC ADR381ARTZ-REEL7 |
| IC422 | 8-759-685-34 | s | IC M62352AGP-D60Q |
| IC423 | 8-759-685-34 | s | IC M62352AGP-D60Q |
| IC424 | 8-759-592-47 | s | IC TC7SZ08FU(TE85R) |
| IC425 | 8-759-592-47 | s | IC TC7SZ08FU(TE85R) |
| IC426 | 8-759-327-01 | s | IC NJM062V(TE2) |
| IC427 | 8-759-327-01 | s | IC NJM062V(TE2) |
| IC428 | 8-759-592-47 | s | IC TC7SZ08FU(TE85R) |
| IC429 | 8-759-592-47 | s | IC TC7SZ08FU(TE85R) |
| IC430 | 8-759-592-47 | s | IC TC7SZ08FU(TE85R) |
| L101 | 1-414-751-91 | s | INDUCTOR 1.0UH |
| L102 | 1-414-751-91 | s | INDUCTOR 1.0UH |
| L201 | 1-414-751-91 | s | INDUCTOR 1.0UH |
| L202 | 1-414-751-91 | s | INDUCTOR 1.0UH |
| L301 | 1-414-751-91 | s | INDUCTOR 1.0UH |
| L302 | 1-414-751-91 | s | INDUCTOR 1.0UH |
| L401 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L402 | 1-414-394-41 | s | INDUCTOR (SMD) 2.2UH |
| L403 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L404 | 1-416-344-21 | s | COIL, CHOKE 10UH |

(PA-317 BOARD (SUFFIX 21-))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| Q401 | 8-729-144-81 | s | TRANSISTOR 2SC4176T1B33B34B35 |
| Q402 | 8-729-140-86 | s | TRANSISTOR 2SA1610-T1Y34 |
| Q403 | 8-729-230-27 | s | TRANSISTOR 2SA1213Y-TE12L |
| Q404 | 8-729-209-77 | s | TRANSISTOR 2SC2873Y-TE12L |
| Q405 | 8-729-144-81 | s | TRANSISTOR 2SC4176T1B33B34B35 |
| Q406 | 8-729-230-27 | s | TRANSISTOR 2SA1213Y-TE12L |
| R102 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R104 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R105 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R106 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R107 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R109 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R110 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R111 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R112 | 1-208-931-81 | s | RES, CHIP 68K (1005) |
| R113 | 1-208-891-81 | s | RES, CHIP 1.5K (1005) |
| R114 | 1-208-891-81 | s | RES, CHIP 1.5K (1005) |
| R115 | 1-208-889-81 | s | RES, CHIP 1.2K (1005) |
| R116 | 1-208-699-11 | s | RES, CHIP 4.7K (1005) |
| R117 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R118 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R119 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R120 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R121 | 1-208-889-81 | s | RES, CHIP 1.2K (1005) |
| R122 | 1-208-699-11 | s | RES, CHIP 4.7K (1005) |
| R123 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R124 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R125 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R126 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R127 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R128 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R129 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R130 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R131 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R132 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R133 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R134 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R135 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R136 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R137 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R138 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R139 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R140 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R141 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R142 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R143 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R144 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R145 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R146 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R147 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R148 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R149 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R150 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R151 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R152 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R153 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R154 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R155 | 1-208-879-81 | s | RES, CHIP 470 (1005) |

(PA-317 BOARD (SUFFIX 21-))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R157 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R158 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R159 | 1-218-945-11 | s | RES, CHIP 220 (1005) |
| R160 | 1-218-945-11 | s | RES, CHIP 220 (1005) |
| R161 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R162 | 1-208-875-81 | s | RES, CHIP 330 (1005) |
| R163 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R164 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R165 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R166 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R168 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R169 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R170 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R171 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R172 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R173 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R174 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R175 | 1-218-945-11 | s | RES, CHIP 220 (1005) |
| R176 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R177 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R178 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R179 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R180 | 1-208-875-81 | s | RES, CHIP 330 (1005) |
| R181 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R182 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R183 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R184 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R185 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R186 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R187 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R188 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R189 | 1-208-865-81 | s | RES, CHIP 120 (1005) |
| R190 | 1-208-865-81 | s | RES, CHIP 120 (1005) |
| R202 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R204 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R205 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R206 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R207 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R209 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R210 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R211 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R212 | 1-208-931-81 | s | RES, CHIP 68K (1005) |
| R213 | 1-208-891-81 | s | RES, CHIP 1.5K (1005) |
| R214 | 1-208-891-81 | s | RES, CHIP 1.5K (1005) |
| R215 | 1-208-889-81 | s | RES, CHIP 1.2K (1005) |
| R216 | 1-208-699-11 | s | RES, CHIP 4.7K (1005) |
| R217 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R218 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R219 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R220 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R221 | 1-208-889-81 | s | RES, CHIP 1.2K (1005) |
| R222 | 1-208-699-11 | s | RES, CHIP 4.7K (1005) |
| R223 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R224 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R225 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R226 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R227 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R228 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R229 | 1-208-855-81 | s | RES, CHIP 47 (1005) |

(PA-317 BOARD (SUFFIX 21-))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R230 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R231 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R232 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R233 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R234 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R235 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R236 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R237 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R238 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R239 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R240 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R241 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R242 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R243 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R244 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R245 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R246 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R247 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R248 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R249 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R250 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R251 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R252 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R253 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R254 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R255 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R257 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R258 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R259 | 1-218-945-11 | s | RES, CHIP 220 (1005) |
| R260 | 1-218-945-11 | s | RES, CHIP 220 (1005) |
| R261 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R262 | 1-208-875-81 | s | RES, CHIP 330 (1005) |
| R263 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R264 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R265 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R266 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R268 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R269 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R270 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R271 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R272 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R273 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R274 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R275 | 1-218-945-11 | s | RES, CHIP 220 (1005) |
| R276 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R277 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R278 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R279 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R280 | 1-208-875-81 | s | RES, CHIP 330 (1005) |
| R281 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R282 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R283 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R284 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R285 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R286 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R287 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R288 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R289 | 1-208-865-81 | s | RES, CHIP 120 (1005) |
| R290 | 1-208-865-81 | s | RES, CHIP 120 (1005) |

(PA-317 BOARD (SUFFIX 21-))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R302 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R304 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R305 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R306 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R307 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R309 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R310 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R311 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R312 | 1-208-931-81 | s | RES, CHIP 68K (1005) |
| R313 | 1-208-891-81 | s | RES, CHIP 1.5K (1005) |
| R314 | 1-208-891-81 | s | RES, CHIP 1.5K (1005) |
| R315 | 1-208-889-81 | s | RES, CHIP 1.2K (1005) |
| R316 | 1-208-699-11 | s | RES, CHIP 4.7K (1005) |
| R317 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R318 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R319 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R320 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R321 | 1-208-889-81 | s | RES, CHIP 1.2K (1005) |
| R322 | 1-208-699-11 | s | RES, CHIP 4.7K (1005) |
| R323 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R324 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R325 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R326 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R327 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R328 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R329 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R330 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R331 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R332 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R333 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R334 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R335 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R336 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R337 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R338 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R339 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R340 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R341 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R342 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R343 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R344 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R345 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R346 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R347 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R348 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R349 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R350 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R351 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R352 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R353 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R354 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R355 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R357 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R358 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R359 | 1-218-945-11 | s | RES, CHIP 220 (1005) |
| R360 | 1-218-945-11 | s | RES, CHIP 220 (1005) |
| R361 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R362 | 1-208-875-81 | s | RES, CHIP 330 (1005) |
| R363 | 1-208-879-81 | s | RES, CHIP 470 (1005) |

(PA-317 BOARD (SUFFIX 21-))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R364 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R365 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R366 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R368 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R369 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R370 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R371 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R372 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R373 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R374 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R375 | 1-218-945-11 | s | RES, CHIP 220 (1005) |
| R376 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R377 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R378 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R379 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R380 | 1-208-875-81 | s | RES, CHIP 330 (1005) |
| R381 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R382 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R383 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R384 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R385 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R386 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R387 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R388 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R389 | 1-208-865-81 | s | RES, CHIP 120 (1005) |
| R390 | 1-208-865-81 | s | RES, CHIP 120 (1005) |
| R401 | 1-208-643-11 | s | RES, CHIP 22 (1005) |
| R402 | 1-208-643-11 | s | RES, CHIP 22 (1005) |
| R403 | 1-208-643-11 | s | RES, CHIP 22 (1005) |
| R404 | 1-208-643-11 | s | RES, CHIP 22 (1005) |
| R405 | 1-208-643-11 | s | RES, CHIP 22 (1005) |
| R406 | 1-208-643-11 | s | RES, CHIP 22 (1005) |
| R407 | 1-208-643-11 | s | RES, CHIP 22 (1005) |
| R408 | 1-208-643-11 | s | RES, CHIP 22 (1005) |
| R409 | 1-208-643-11 | s | RES, CHIP 22 (1005) |
| R410 | 1-208-643-11 | s | RES, CHIP 22 (1005) |
| R411 | 1-208-643-11 | s | RES, CHIP 22 (1005) |
| R412 | 1-208-643-11 | s | RES, CHIP 22 (1005) |
| R413 | 1-208-643-11 | s | RES, CHIP 22 (1005) |
| R414 | 1-208-643-11 | s | RES, CHIP 22 (1005) |
| R415 | 1-208-643-11 | s | RES, CHIP 22 (1005) |
| R416 | 1-208-643-11 | s | RES, CHIP 22 (1005) |
| R417 | 1-208-643-11 | s | RES, CHIP 22 (1005) |
| R418 | 1-208-643-11 | s | RES, CHIP 22 (1005) |
| R419 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R420 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R421 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R422 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R423 | 1-218-945-11 | s | RES, CHIP 220 (1005) |
| R424 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R425 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R426 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R427 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R428 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R429 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R430 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R431 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R432 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R433 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |

(PA-317 BOARD (SUFFIX 21-))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R435 | 1-218-945-11 | s | RES, CHIP 220 (1005) |
| R436 | 1-218-945-11 | s | RES, CHIP 220 (1005) |
| R437 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R438 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R439 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R440 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R441 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R442 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R443 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R444 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R445 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R446 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R447 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R448 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R449 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R450 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R451 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R452 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R453 | 1-208-699-11 | s | RES, CHIP 4.7K (1005) |
| R454 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R455 | 1-208-699-11 | s | RES, CHIP 4.7K (1005) |
| R456 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R457 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R458 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R459 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R460 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R461 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R462 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R463 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R464 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R465 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R466 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R467 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R468 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R469 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R470 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R471 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R472 | 1-218-945-11 | s | RES, CHIP 220 (1005) |
| R473 | 1-218-945-11 | s | RES, CHIP 220 (1005) |
| R474 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R475 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R476 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R477 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R478 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R479 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R480 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R481 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R482 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R483 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R484 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R485 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R486 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R487 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R488 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R489 | 1-208-905-81 | s | RES, CHIP 5.6K (1005) |
| R490 | *1 1-218-945-11 | s | RES, CHIP 220 (1005) |
| | *2 1-208-867-81 | s | RES, CHIP 150 (1005) |
| R491 | 1-208-699-11 | s | RES, CHIP 4.7K (1005) |
| R492 | 1-218-941-11 | s | RES, CHIP 100 (1005) |

(PA-317 BOARD (SUFFIX 21-))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R493 | 1-218-945-11 | s | RES, CHIP 220 (1005) |
| R494 *1 | 1-208-643-11 | s | RES, CHIP 22 (1005) |
| *2 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R495 | 1-208-643-11 | s | RES, CHIP 22 (1005) |
| R496 | 1-208-643-11 | s | RES, CHIP 22 (1005) |
| R497 | 1-208-643-11 | s | RES, CHIP 22 (1005) |
| R498 | 1-208-643-11 | s | RES, CHIP 22 (1005) |
| R499 | 1-208-643-11 | s | RES, CHIP 22 (1005) |
| R500 | 1-208-643-11 | s | RES, CHIP 22 (1005) |
| R501 | 1-208-643-11 | s | RES, CHIP 22 (1005) |
| R502 | 1-208-643-11 | s | RES, CHIP 22 (1005) |
| R503 | 1-208-643-11 | s | RES, CHIP 22 (1005) |
| R504 | 1-208-643-11 | s | RES, CHIP 22 (1005) |
| R505 | 1-208-643-11 | s | RES, CHIP 22 (1005) |
| R506 | 1-208-643-11 | s | RES, CHIP 22 (1005) |
| R507 | 1-208-643-11 | s | RES, CHIP 22 (1005) |
| R508 | 1-208-643-11 | s | RES, CHIP 22 (1005) |
| R509 | 1-208-643-11 | s | RES, CHIP 22 (1005) |
| R510 | 1-208-643-11 | s | RES, CHIP 22 (1005) |
| R511 | 1-208-643-11 | s | RES, CHIP 22 (1005) |
| R512 *2 | 1-208-943-81 | s | RES, CHIP 220K (1005) |
| RV101 | 1-227-405-21 | s | RES, ADJ, CERMET 220 |
| RV102 | 1-227-405-21 | s | RES, ADJ, CERMET 220 |
| RV103 | 1-227-405-21 | s | RES, ADJ, CERMET 220 |
| RV201 | 1-227-405-21 | s | RES, ADJ, CERMET 220 |
| RV202 | 1-227-405-21 | s | RES, ADJ, CERMET 220 |
| RV203 | 1-227-405-21 | s | RES, ADJ, CERMET 220 |
| RV301 | 1-227-405-21 | s | RES, ADJ, CERMET 220 |
| RV302 | 1-227-405-21 | s | RES, ADJ, CERMET 220 |
| RV303 | 1-227-405-21 | s | RES, ADJ, CERMET 220 |

---

PA-317C BOARD

---

*1: [Board No. suffix 21]
*2: [Board No. suffix 22-]

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| 1pc | A-1175-915-A | s | MOUNTED CIRCUIT BOARD, PA-317CG |
| C102 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C106 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C107 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C108 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C109 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C110 | 1-135-646-91 | s | CAP, CHIP FILM 1MF |
| C111 | 1-135-646-91 | s | CAP, CHIP FILM 1MF |
| C114 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C115 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C116 | 1-165-908-91 | s | CAP, CERAMIC 1000000PF B 1608 |
| C117 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C118 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C120 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C124 | 1-165-908-91 | s | CAP, CERAMIC 1000000PF B 1608 |
| C126 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C128 | 1-165-871-21 | s | CAP, ELECT 22MF (4.0X5.5) |
| C130 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C132 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C135 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C138 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C139 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C141 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C145 | 1-164-845-81 | s | CAP, CHIP CERAMIC 5PF CH 1005 |
| C146 | 1-165-908-91 | s | CAP, CERAMIC 1000000PF B 1608 |
| C147 | 1-165-871-21 | s | CAP, ELECT 22MF (4.0X5.5) |
| C148 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C149 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C150 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C151 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C159 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C161 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C163 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C164 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C167 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C169 | 1-165-871-21 | s | CAP, ELECT 22MF (4.0X5.5) |
| C170 | 1-165-908-91 | s | CAP, CERAMIC 1000000PF B 1608 |
| C173 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C174 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C177 | 1-164-845-81 | s | CAP, CHIP CERAMIC 5PF CH 1005 |
| C182 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C183 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C184 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C185 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C190 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C193 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C195 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C196 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C202 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C206 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C207 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C208 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C209 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C210 | 1-135-646-91 | s | CAP, CHIP FILM 1MF |
| C211 | 1-135-646-91 | s | CAP, CHIP FILM 1MF |
| C214 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C215 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C216 | 1-165-908-91 | s | CAP, CERAMIC 1000000PF B 1608 |

(PA-317C BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C217 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C218 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C220 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C224 | 1-165-908-91 | s | CAP, CERAMIC 1000000PF B 1608 |
| C226 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C228 | 1-165-871-21 | s | CAP, ELECT 22MF (4.0X5.5) |
| C230 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C232 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C235 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C238 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C239 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C241 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C245 | 1-164-845-81 | s | CAP, CHIP CERAMIC 5PF CH 1005 |
| C246 | 1-165-908-91 | s | CAP, CERAMIC 1000000PF B 1608 |
| C247 | 1-165-871-21 | s | CAP, ELECT 22MF (4.0X5.5) |
| C248 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C249 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C250 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C251 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C259 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C261 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C263 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C264 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C267 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C269 | 1-165-871-21 | s | CAP, ELECT 22MF (4.0X5.5) |
| C270 | 1-165-908-91 | s | CAP, CERAMIC 1000000PF B 1608 |
| C273 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C274 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C277 | 1-164-845-81 | s | CAP, CHIP CERAMIC 5PF CH 1005 |
| C282 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C283 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C284 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C285 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C290 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C293 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C295 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C296 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C302 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C306 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C307 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C308 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C309 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C310 | 1-135-646-91 | s | CAP, CHIP FILM 1MF |
| C311 | 1-135-646-91 | s | CAP, CHIP FILM 1MF |
| C314 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C315 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C316 | 1-165-908-91 | s | CAP, CERAMIC 1000000PF B 1608 |
| C317 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C318 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C320 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C322 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C324 | 1-165-908-91 | s | CAP, CERAMIC 1000000PF B 1608 |
| C326 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C328 | 1-165-871-21 | s | CAP, ELECT 22MF (4.0X5.5) |
| C330 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C332 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C335 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C338 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C339 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |

(PA-317C BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C341 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C345 | 1-164-845-81 | s | CAP, CHIP CERAMIC 5PF CH 1005 |
| C346 | 1-165-908-91 | s | CAP, CERAMIC 1000000PF B 1608 |
| C347 | 1-165-871-21 | s | CAP, ELECT 22MF (4.0X5.5) |
| C348 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C349 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C350 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C351 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C359 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C361 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C363 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C364 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C367 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C369 | 1-165-871-21 | s | CAP, ELECT 22MF (4.0X5.5) |
| C370 | 1-165-908-91 | s | CAP, CERAMIC 1000000PF B 1608 |
| C373 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C374 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C377 | 1-164-845-81 | s | CAP, CHIP CERAMIC 5PF CH 1005 |
| C382 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C383 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C384 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C385 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C390 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C393 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C395 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C396 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C401 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C402 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C403 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C404 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C405 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C406 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C407 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C408 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C409 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C410 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C411 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C412 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C413 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C414 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C415 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C416 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C417 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C418 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C419 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C420 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C423 | 1-165-884-91 | s | CAP, CERAMIC 2.2MF (1608) |
| C424 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C425 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C426 | 1-165-884-91 | s | CAP, CERAMIC 2.2MF (1608) |
| C427 | 1-126-395-21 | s | CAP, CHIP ELECT 22MF (5X5.7) |
| C428 | 1-126-391-21 | s | CAP, CHIP ELECT 47MF (5X5.7) |
| C429 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C430 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C431 | 1-165-884-91 | s | CAP, CERAMIC 2.2MF (1608) |
| C432 | 1-165-884-91 | s | CAP, CERAMIC 2.2MF (1608) |
| C433 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C434 | 1-165-884-91 | s | CAP, CERAMIC 2.2MF (1608) |
| C435 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |

(PA-317C BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C436 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C437 | 1-165-903-21 | s | CAP, ELECT 120MF (6.3X6) |
| C438 | 1-165-903-21 | s | CAP, ELECT 120MF (6.3X6) |
| C439 | 1-165-884-91 | s | CAP, CERAMIC 2.2MF (1608) |
| C440 | 1-126-395-21 | s | CAP, CHIP ELECT 22MF (5X5.7) |
| C441 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C442 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C443 *1 | 1-165-884-91 | s | CAP, CERAMIC 2.2MF (1608) |
| *2 | 1-162-927-91 | s | CAP, CERAMIC 100PF CH 1608 |
| C444 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C445 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C446 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C447 | 1-165-903-21 | s | CAP, ELECT 120MF (6.3X6) |
| C452 | 1-164-858-81 | s | CAP, CHIP CERAMIC 22PF CH 1005 |
| C453 | 1-164-858-81 | s | CAP, CHIP CERAMIC 22PF CH 1005 |
| C464 | 1-164-858-81 | s | CAP, CHIP CERAMIC 22PF CH 1005 |
| CN101 | 1-785-900-21 | s | CONNECTOR 5P |
| CN201 | 1-785-900-21 | s | CONNECTOR 5P |
| CN301 | 1-785-900-21 | s | CONNECTOR 5P |
| CN401 | 1-770-454-21 | o | CONNECTOR, BOARD TO BOARD 70P |
| CN402 | 1-779-522-31 | s | CONNECTOR, FFC/FPC(ZIF) AN 40P |
| E401 | 1-535-877-22 | s | CHIP, CHECKER |
| FL102 | 1-813-541-11 | s | FILTER, LOW PASS |
| FL202 | 1-813-541-11 | s | FILTER, LOW PASS |
| FL302 | 1-813-541-11 | s | FILTER, LOW PASS |
| IC101 | 6-706-863-01 | s | IC LMH6732MFX/NOPB |
| IC102 | 6-706-863-01 | s | IC LMH6732MFX/NOPB |
| IC106 | 8-753-261-02 | s | IC CXA3648AR-T4 |
| IC108 | 8-759-561-46 | s | IC AD8014ARTZ-REEL7 |
| IC111 | 6-706-863-01 | s | IC LMH6732MFX/NOPB |
| IC201 | 6-706-863-01 | s | IC LMH6732MFX/NOPB |
| IC202 | 6-706-863-01 | s | IC LMH6732MFX/NOPB |
| IC206 | 8-753-261-02 | s | IC CXA3648AR-T4 |
| IC208 | 8-759-561-46 | s | IC AD8014ARTZ-REEL7 |
| IC211 | 6-706-863-01 | s | IC LMH6732MFX/NOPB |
| IC301 | 6-706-863-01 | s | IC LMH6732MFX/NOPB |
| IC302 | 6-706-863-01 | s | IC LMH6732MFX/NOPB |
| IC306 | 8-753-261-02 | s | IC CXA3648AR-T4 |
| IC308 | 8-759-561-46 | s | IC AD8014ARTZ-REEL7 |
| IC311 | 6-706-863-01 | s | IC LMH6732MFX/NOPB |
| IC401 | 8-759-592-47 | s | IC TC7SZ08FU(TE85R) |
| IC402 | 8-759-592-47 | s | IC TC7SZ08FU(TE85R) |
| IC403 | 8-759-592-47 | s | IC TC7SZ08FU(TE85R) |
| IC404 | 8-759-592-47 | s | IC TC7SZ08FU(TE85R) |
| IC405 | 8-759-592-47 | s | IC TC7SZ08FU(TE85R) |
| IC406 | 8-759-592-47 | s | IC TC7SZ08FU(TE85R) |
| IC407 | 8-759-592-47 | s | IC TC7SZ08FU(TE85R) |
| IC408 | 8-759-592-47 | s | IC TC7SZ08FU(TE85R) |
| IC409 | 8-759-592-47 | s | IC TC7SZ08FU(TE85R) |
| IC410 | 8-759-592-47 | s | IC TC7SZ08FU(TE85R) |
| IC411 | 8-759-592-47 | s | IC TC7SZ08FU(TE85R) |
| IC412 | 8-759-592-47 | s | IC TC7SZ08FU(TE85R) |
| IC413 | 8-759-592-47 | s | IC TC7SZ08FU(TE85R) |
| IC414 | 8-759-592-47 | s | IC TC7SZ08FU(TE85R) |
| IC415 | 8-759-592-47 | s | IC TC7SZ08FU(TE85R) |
| IC416 | 8-759-592-47 | s | IC TC7SZ08FU(TE85R) |
| IC417 | 8-759-592-47 | s | IC TC7SZ08FU(TE85R) |
| IC418 | 8-759-592-47 | s | IC TC7SZ08FU(TE85R) |
| IC419 | 8-759-685-34 | s | IC M62352AGP-D60Q |

(PA-317C BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| IC420 | 8-759-685-34 | s | IC M62352AGP-D60Q |
| IC421 | 6-704-976-01 | s | IC ADR381ARTZ-REEL7 |
| IC422 | 8-759-685-34 | s | IC M62352AGP-D60Q |
| IC423 | 8-759-685-34 | s | IC M62352AGP-D60Q |
| IC424 | 8-759-592-47 | s | IC TC7SZ08FU(TE85R) |
| IC425 | 8-759-592-47 | s | IC TC7SZ08FU(TE85R) |
| IC426 | 8-759-327-01 | s | IC NJM062V(TE2) |
| IC427 | 8-759-327-01 | s | IC NJM062V(TE2) |
| L101 | 1-414-751-91 | s | INDUCTOR 1.0UH |
| L201 | 1-414-751-91 | s | INDUCTOR 1.0UH |
| L301 | 1-414-751-91 | s | INDUCTOR 1.0UH |
| L401 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L402 | 1-414-394-41 | s | INDUCTOR (SMD) 2.2UH |
| L403 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L404 | 1-416-344-21 | s | COIL, CHOKE 10UH |
| Q401 | 8-729-144-81 | s | TRANSISTOR 2SC4176T1B33B34B35 |
| Q402 | 8-729-140-86 | s | TRANSISTOR 2SA1610-T1Y34 |
| Q403 | 8-729-230-27 | s | TRANSISTOR 2SA1213Y-TE12L |
| Q404 | 8-729-209-77 | s | TRANSISTOR 2SC2873Y-TE12L |
| Q405 | 8-729-144-81 | s | TRANSISTOR 2SC4176T1B33B34B35 |
| Q406 | 8-729-230-27 | s | TRANSISTOR 2SA1213Y-TE12L |
| R102 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R104 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R105 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R106 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R107 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R109 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R110 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R111 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R112 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R113 | 1-208-891-81 | s | RES, CHIP 1.5K (1005) |
| R114 | 1-208-891-81 | s | RES, CHIP 1.5K (1005) |
| R115 | 1-208-889-81 | s | RES, CHIP 1.2K (1005) |
| R116 | 1-208-699-11 | s | RES, CHIP 4.7K (1005) |
| R117 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R118 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R119 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R120 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R126 | 1-218-945-11 | s | RES, CHIP 220 (1005) |
| R128 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R130 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R131 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R133 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R134 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R136 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R137 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R138 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R140 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R141 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R142 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R145 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R147 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R148 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R151 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R153 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R154 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R157 | 1-208-855-81 | s | RES, CHIP 47 (1005) |

(PA-317C BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R159 | 1-218-945-11 | s | RES, CHIP 220 (1005) |
| R161 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R163 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R168 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R170 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R173 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R176 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R178 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R181 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R182 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R184 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R185 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R187 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R189 | 1-208-865-81 | s | RES, CHIP 120 (1005) |
| R190 | 1-208-865-81 | s | RES, CHIP 120 (1005) |
| R202 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R204 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R205 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R206 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R207 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R209 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R210 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R211 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R212 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R213 | 1-208-891-81 | s | RES, CHIP 1.5K (1005) |
| R214 | 1-208-891-81 | s | RES, CHIP 1.5K (1005) |
| R215 | 1-208-889-81 | s | RES, CHIP 1.2K (1005) |
| R216 | 1-208-699-11 | s | RES, CHIP 4.7K (1005) |
| R217 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R218 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R219 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R220 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R226 | 1-218-945-11 | s | RES, CHIP 220 (1005) |
| R228 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R230 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R231 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R233 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R234 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R236 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R237 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R238 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R240 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R241 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R242 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R245 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R247 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R248 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R251 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R253 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R254 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R257 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R259 | 1-218-945-11 | s | RES, CHIP 220 (1005) |
| R261 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R263 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R268 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R270 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R273 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R276 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R278 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |

(PA-317C BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R281 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R282 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R284 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R285 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R287 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R289 | 1-208-865-81 | s | RES, CHIP 120 (1005) |
| R290 | 1-208-865-81 | s | RES, CHIP 120 (1005) |
| R302 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R304 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R305 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R306 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R307 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R309 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R310 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R311 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R312 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R313 | 1-208-891-81 | s | RES, CHIP 1.5K (1005) |
| R314 | 1-208-891-81 | s | RES, CHIP 1.5K (1005) |
| R315 | 1-208-889-81 | s | RES, CHIP 1.2K (1005) |
| R316 | 1-208-699-11 | s | RES, CHIP 4.7K (1005) |
| R317 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R318 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R319 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R320 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R326 | 1-218-945-11 | s | RES, CHIP 220 (1005) |
| R328 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R330 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R331 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R333 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R334 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R336 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R337 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R338 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R340 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R341 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R342 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R345 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R347 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R348 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R351 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R353 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R354 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R357 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R359 | 1-218-945-11 | s | RES, CHIP 220 (1005) |
| R361 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R363 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R368 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R370 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R373 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R376 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R378 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R381 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R382 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R384 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R385 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R387 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R389 | 1-208-865-81 | s | RES, CHIP 120 (1005) |
| R390 | 1-208-865-81 | s | RES, CHIP 120 (1005) |
| R401 | 1-208-643-11 | s | RES, CHIP 22 (1005) |

(PA-317C BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R402 | 1-208-643-11 | s | RES, CHIP 22 (1005) |
| R403 | 1-208-643-11 | s | RES, CHIP 22 (1005) |
| R404 | 1-208-643-11 | s | RES, CHIP 22 (1005) |
| R405 | 1-208-643-11 | s | RES, CHIP 22 (1005) |
| R406 | 1-208-643-11 | s | RES, CHIP 22 (1005) |
| R407 | 1-208-643-11 | s | RES, CHIP 22 (1005) |
| R408 | 1-208-643-11 | s | RES, CHIP 22 (1005) |
| R409 | 1-208-643-11 | s | RES, CHIP 22 (1005) |
| R410 | 1-208-643-11 | s | RES, CHIP 22 (1005) |
| R411 | 1-208-643-11 | s | RES, CHIP 22 (1005) |
| R412 | 1-208-643-11 | s | RES, CHIP 22 (1005) |
| R413 | 1-208-643-11 | s | RES, CHIP 22 (1005) |
| R414 | 1-208-643-11 | s | RES, CHIP 22 (1005) |
| R415 | 1-208-643-11 | s | RES, CHIP 22 (1005) |
| R416 | 1-208-643-11 | s | RES, CHIP 22 (1005) |
| R417 | 1-208-643-11 | s | RES, CHIP 22 (1005) |
| R418 | 1-208-643-11 | s | RES, CHIP 22 (1005) |
| R419 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R420 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R421 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R422 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R423 | 1-218-945-11 | s | RES, CHIP 220 (1005) |
| R424 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R425 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R426 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R427 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R428 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R429 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R430 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R431 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R432 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R433 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R435 | 1-218-945-11 | s | RES, CHIP 220 (1005) |
| R436 | 1-218-945-11 | s | RES, CHIP 220 (1005) |
| R437 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R438 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R439 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R440 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R441 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R445 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R446 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R447 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R448 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R449 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R450 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R451 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R452 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R453 | 1-208-699-11 | s | RES, CHIP 4.7K (1005) |
| R454 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R455 | 1-208-699-11 | s | RES, CHIP 4.7K (1005) |
| R456 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R457 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R458 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R459 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R460 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R464 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R465 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R466 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R467 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |

(PA-317C BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R468 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R469 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R470 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R471 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R472 | 1-218-945-11 | s | RES, CHIP 220 (1005) |
| R473 | 1-218-945-11 | s | RES, CHIP 220 (1005) |
| R474 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R475 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R476 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R477 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R478 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R479 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R480 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R484 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R485 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R486 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R487 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R488 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R489 | 1-208-905-81 | s | RES, CHIP 5.6K (1005) |
| R490 *1 | 1-218-945-11 | s | RES, CHIP 220 (1005) |
| *2 | 1-208-867-81 | s | RES, CHIP 150 (1005) |
| R491 | 1-208-699-11 | s | RES, CHIP 4.7K (1005) |
| R492 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R493 | 1-218-945-11 | s | RES, CHIP 220 (1005) |
| R494 *1 | 1-208-643-11 | s | RES, CHIP 22 (1005) |
| *2 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R495 | 1-208-643-11 | s | RES, CHIP 22 (1005) |
| R496 | 1-208-643-11 | s | RES, CHIP 22 (1005) |
| R497 | 1-208-643-11 | s | RES, CHIP 22 (1005) |
| R498 | 1-208-643-11 | s | RES, CHIP 22 (1005) |
| R499 | 1-208-643-11 | s | RES, CHIP 22 (1005) |
| R500 | 1-208-643-11 | s | RES, CHIP 22 (1005) |
| R501 | 1-208-643-11 | s | RES, CHIP 22 (1005) |
| R502 | 1-208-643-11 | s | RES, CHIP 22 (1005) |
| R503 | 1-208-643-11 | s | RES, CHIP 22 (1005) |
| R504 | 1-208-643-11 | s | RES, CHIP 22 (1005) |
| R505 | 1-208-643-11 | s | RES, CHIP 22 (1005) |
| R506 | 1-208-643-11 | s | RES, CHIP 22 (1005) |
| R507 | 1-208-643-11 | s | RES, CHIP 22 (1005) |
| R508 | 1-208-643-11 | s | RES, CHIP 22 (1005) |
| R512 *2 | 1-208-943-81 | s | RES, CHIP 220K (1005) |
| RV102 | 1-227-405-21 | s | RES, ADJ, CERMET 220 |
| RV202 | 1-227-405-21 | s | RES, ADJ, CERMET 220 |
| RV302 | 1-227-405-21 | s | RES, ADJ, CERMET 220 |

---
PA-327 BOARD
---

*1: [Board No. suffix 11,21]
*2: [Board No. suffix 22-]

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| 1pc | A-1159-994-A | s | MOUNTED CIRCUIT BOARD, PA-327G (GOLD) |
| | A-1099-203-A | s | MOUNTED CIRCUIT BOARD, PA-327 (SILVER) |
| C102 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C103 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C104 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C105 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C106 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C107 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C108 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C109 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C110 | 1-135-646-11 | s | CAPACITOR,CHIP FILM 1MF 16V |
| C111 | 1-135-646-11 | s | CAPACITOR,CHIP FILM 1MF 16V |
| C112 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C113 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C114 | 1-165-908-11 | s | CAP, CERAMIC 1MF B 1608 |
| C115 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C116 | 1-165-908-11 | s | CAP, CERAMIC 1MF B 1608 |
| C117 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C118 | 1-165-871-11 | s | CAPACITOR,ELECT 22MF |
| C119 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C120 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C121 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C122 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C123 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C124 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C125 | 1-164-845-11 | s | CAPACITOR,CERAMIC 5PF/16V(1005 |
| C126 | 1-165-908-11 | s | CAP, CERAMIC 1MF B 1608 |
| C127 | 1-165-871-11 | s | CAPACITOR,ELECT 22MF |
| C128 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C129 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C130 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C131 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C132 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C133 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C134 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C135 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C136 | 1-165-871-11 | s | CAPACITOR,ELECT 22MF |
| C137 | 1-165-908-11 | s | CAP, CERAMIC 1MF B 1608 |
| C138 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C139 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C140 | 1-164-845-11 | s | CAPACITOR,CERAMIC 5PF/16V(1005 |
| C142 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C143 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C144 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C145 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C146 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C147 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C148 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C149 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C150 | 1-164-874-11 | s | CAPACITOR,CHIP CERAMIC 100PF |
| C151 | 1-164-874-11 | s | CAPACITOR,CHIP CERAMIC 100PF |
| C202 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C203 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |

(PA-327 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C204 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C205 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C206 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C207 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C208 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C209 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C210 | 1-135-646-11 | s | CAPACITOR,CHIP FILM 1MF 16V |
| C211 | 1-135-646-11 | s | CAPACITOR,CHIP FILM 1MF 16V |
| C212 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C213 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C214 | 1-165-908-11 | s | CAP, CERAMIC 1MF B 1608 |
| C215 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C216 | 1-165-908-11 | s | CAP, CERAMIC 1MF B 1608 |
| C217 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C218 | 1-165-871-11 | s | CAPACITOR,ELECT 22MF |
| C219 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C220 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C221 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C222 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C223 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C224 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C225 | 1-164-845-11 | s | CAPACITOR,CERAMIC 5PF/16V(1005 |
| C226 | 1-165-908-11 | s | CAP, CERAMIC 1MF B 1608 |
| C227 | 1-165-871-11 | s | CAPACITOR,ELECT 22MF |
| C228 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C229 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C230 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C231 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C232 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C233 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C234 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C235 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C236 | 1-165-871-11 | s | CAPACITOR,ELECT 22MF |
| C237 | 1-165-908-11 | s | CAP, CERAMIC 1MF B 1608 |
| C238 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C239 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C240 | 1-164-845-11 | s | CAPACITOR,CERAMIC 5PF/16V(1005 |
| C242 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C243 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C244 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C245 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C246 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C247 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C248 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C249 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C250 | 1-164-874-11 | s | CAPACITOR,CHIP CERAMIC 100PF |
| C251 | 1-164-874-11 | s | CAPACITOR,CHIP CERAMIC 100PF |
| C302 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C303 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C304 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C305 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C306 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C307 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C308 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C309 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C310 | 1-135-646-11 | s | CAPACITOR,CHIP FILM 1MF 16V |
| C311 | 1-135-646-11 | s | CAPACITOR,CHIP FILM 1MF 16V |
| C312 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C313 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C314 | 1-165-908-11 | s | CAP, CERAMIC 1MF B 1608 |

(PA-327 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C315 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C316 | 1-165-908-11 | s | CAP, CERAMIC 1MF B 1608 |
| C317 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C318 | 1-165-871-11 | s | CAPACITOR,ELECT 22MF |
| C319 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C320 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C321 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C322 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C323 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C324 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C325 | 1-164-845-11 | s | CAPACITOR,CERAMIC 5PF/16V(1005 |
| C326 | 1-165-908-11 | s | CAP, CERAMIC 1MF B 1608 |
| C327 | 1-165-871-11 | s | CAPACITOR,ELECT 22MF |
| C328 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C329 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C330 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C331 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C332 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C333 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C334 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C335 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C336 | 1-165-871-11 | s | CAPACITOR,ELECT 22MF |
| C337 | 1-165-908-11 | s | CAP, CERAMIC 1MF B 1608 |
| C338 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C339 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C340 | 1-164-845-11 | s | CAPACITOR,CERAMIC 5PF/16V(1005 |
| C342 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C343 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C344 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C345 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C346 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C347 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C348 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C349 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C350 | 1-164-874-11 | s | CAPACITOR,CHIP CERAMIC 100PF |
| C351 | 1-164-874-11 | s | CAPACITOR,CHIP CERAMIC 100PF |
| C401 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C402 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C403 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C404 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C405 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C406 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C407 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C408 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C409 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C410 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C411 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C412 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C413 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C414 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C415 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C416 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C417 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C418 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C419 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C420 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C423 | 1-165-884-91 | s | CAPACITOR, CERAMIC 2.2MF(1608) |
| C424 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C425 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C426 | 1-165-884-91 | s | CAPACITOR, CERAMIC 2.2MF(1608) |

(PA-327 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C427 | 1-126-395-11 | s | CAPACITOR,ELECT 22MF/16V(CHIP) |
| C428 | 1-126-391-11 | s | CAPACITOR ELECT 47MF/6.3V(105) |
| C429 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C430 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C431 | 1-165-884-91 | s | CAPACITOR, CERAMIC 2.2MF(1608) |
| C432 | 1-165-884-91 | s | CAPACITOR, CERAMIC 2.2MF(1608) |
| C433 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C434 | 1-165-884-91 | s | CAPACITOR, CERAMIC 2.2MF(1608) |
| C435 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C436 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C437 | 1-165-881-21 | s | CAPACITOR, ELECT 120MF(6.3X6) |
| C438 | 1-165-881-21 | s | CAPACITOR, ELECT 120MF(6.3X6) |
| C439 | 1-165-884-91 | s | CAPACITOR, CERAMIC 2.2MF(1608) |
| C440 | 1-126-395-11 | s | CAPACITOR,ELECT 22MF/16V(CHIP) |
| C441 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C442 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C443 *1 | 1-165-884-91 | s | CAPACITOR, CERAMIC 2.2MF(1608) |
| *2 | 1-162-927-91 | s | CAP, CERAMIC 100PF CH 1608 |
| C444 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C445 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C446 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C447 | 1-165-881-21 | s | CAPACITOR, ELECT 120MF(6.3X6) |
| CN101 | 1-785-900-11 | s | CONNECTOR |
| CN201 | 1-785-900-11 | s | CONNECTOR |
| CN301 | 1-785-900-11 | s | CONNECTOR |
| CN401 | 1-770-454-21 | o | CONNECTOR, BOARD TO BOARD 70P |
| CN402 | 1-779-522-31 | s | CONNECTOR, FFC/FPC(ZIF) AN 40P (GOLD) |
| E401 | 1-535-877-22 | s | CHIP,CHECKER (TEST POINT) |
| FL101 | 1-813-541-11 | s | FILTER, LOW PASS |
| FL201 | 1-813-542-11 | s | FILTER, LOW PASS |
| FL301 | 1-813-541-11 | s | FILTER, LOW PASS |
| IC101 | 6-706-863-01 | s | IC LMH6732MFX/NOPB |
| IC102 | 6-706-863-01 | s | IC LMH6732MFX/NOPB |
| IC105 | 8-759-561-46 | s | IC AD8014ART-REEL7 |
| IC106 | 6-706-863-01 | s | IC LMH6732MFX/NOPB |
| IC201 | 6-706-863-01 | s | IC LMH6732MFX/NOPB |
| IC202 | 6-706-863-01 | s | IC LMH6732MFX/NOPB |
| IC205 | 8-759-561-46 | s | IC AD8014ART-REEL7 |
| IC206 | 6-706-863-01 | s | IC LMH6732MFX/NOPB |
| IC301 | 6-706-863-01 | s | IC LMH6732MFX/NOPB |
| IC302 | 6-706-863-01 | s | IC LMH6732MFX/NOPB |
| IC305 | 8-759-561-46 | s | IC AD8014ART-REEL7 |
| IC306 | 6-706-863-01 | s | IC LMH6732MFX/NOPB |
| IC401 | 8-759-592-47 | s | IC TC7SZ08FU(TE85R) |
| IC402 | 8-759-592-47 | s | IC TC7SZ08FU(TE85R) |
| IC403 | 8-759-592-47 | s | IC TC7SZ08FU(TE85R) |
| IC404 | 8-759-592-47 | s | IC TC7SZ08FU(TE85R) |
| IC405 | 8-759-592-47 | s | IC TC7SZ08FU(TE85R) |
| IC406 | 8-759-592-47 | s | IC TC7SZ08FU(TE85R) |
| IC407 | 8-759-592-47 | s | IC TC7SZ08FU(TE85R) |
| IC408 | 8-759-592-47 | s | IC TC7SZ08FU(TE85R) |
| IC409 | 8-759-592-47 | s | IC TC7SZ08FU(TE85R) |
| IC410 | 8-759-592-47 | s | IC TC7SZ08FU(TE85R) |
| IC411 | 8-759-592-47 | s | IC TC7SZ08FU(TE85R) |
| IC412 | 8-759-592-47 | s | IC TC7SZ08FU(TE85R) |
| IC413 | 8-759-592-47 | s | IC TC7SZ08FU(TE85R) |

(PA-327 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| IC414 | 8-759-592-47 | s | IC TC7SZ08FU(TE85R) |
| IC415 | 8-759-592-47 | s | IC TC7SZ08FU(TE85R) |
| IC416 | 8-759-592-47 | s | IC TC7SZ08FU(TE85R) |
| IC417 | 8-759-592-47 | s | IC TC7SZ08FU(TE85R) |
| IC418 | 8-759-592-47 | s | IC TC7SZ08FU(TE85R) |
| IC419 | 8-759-685-33 | s | IC BU2500FV-E2 |
| IC420 | 8-759-685-33 | s | IC BU2500FV-E2 |
| IC421 | 6-704-976-01 | s | IC ADR381ART-REEL7 |
| IC422 | 8-759-685-33 | s | IC BU2500FV-E2 |
| IC423 | 8-759-685-33 | s | IC BU2500FV-E2 |
| IC424 | 8-759-592-47 | s | IC TC7SZ08FU(TE85R) |
| IC425 | 8-759-592-47 | s | IC TC7SZ08FU(TE85R) |
| IC426 | 8-759-327-01 | s | IC NJM062V-TE2 |
| IC427 | 8-759-327-01 | s | IC NJM062V-TE2 |
| L101 | 1-414-751-11 | s | INDUCTOR 1.0UH |
| L201 | 1-414-751-11 | s | INDUCTOR 1.0UH |
| L301 | 1-414-751-11 | s | INDUCTOR 1.0UH |
| L401 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |
| L402 | 1-414-394-11 | s | INDUCTOR (SMD) 2.2UH |
| L403 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |
| L404 | 1-416-344-11 | s | COIL, CHOKE 10UH |
| Q401 | 8-729-143-13 | s | TRANSISTOR 2SC4176-B34 |
| Q402 | 8-729-143-07 | s | TRANSISTOR 2SA1610-Y33 |
| Q403 | 8-729-230-27 | s | TRANSISTOR 2SA1213Y-TE12L |
| Q404 | 8-729-807-51 | s | TRANSISTOR 2SD1623-S |
| Q405 | 8-729-143-13 | s | TRANSISTOR 2SC4176-B34 |
| Q406 | 8-729-230-27 | s | TRANSISTOR 2SA1213Y-TE12L |
| R104 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R105 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R106 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R107 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R109 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R110 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R111 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R112 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R113 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R114 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R115 | 1-218-849-11 | s | RESISTOR,CHIP 1.2K 1/10W(1608) |
| R116 | 1-208-699-11 | s | RESISTOR,CHIP 4.7K 1/16W(1005) |
| R117 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R118 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R119 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R120 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R121 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R122 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R123 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R124 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R125 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R126 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R127 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R128 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R129 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R130 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R131 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R132 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R133 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R134 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R135 | 1-208-675-11 | s | RESISTOR CHIP 470 1/16W (1005) |

(PA-327 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R136 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R137 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R138 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R139 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R140 | 1-208-675-11 | s | RESISTOR CHIP 470 1/16W (1005) |
| R141 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R142 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R143 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R144 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R145 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R146 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R147 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R148 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R149 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R204 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R205 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R206 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R207 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R209 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R210 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R211 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R212 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R213 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R214 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R215 | 1-218-849-11 | s | RESISTOR,CHIP 1.2K 1/10W(1608) |
| R216 | 1-208-699-11 | s | RESISTOR,CHIP 4.7K 1/16W(1005) |
| R217 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R218 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R219 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R220 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R221 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R222 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R223 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R224 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R225 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R226 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R227 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R228 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R229 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R230 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R231 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R232 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R233 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R234 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R235 | 1-208-675-11 | s | RESISTOR CHIP 470 1/16W (1005) |
| R236 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R237 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R238 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R239 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R240 | 1-208-675-11 | s | RESISTOR CHIP 470 1/16W (1005) |
| R241 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R242 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R243 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R244 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R245 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R246 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R247 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R248 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R249 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R304 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |

(PA-327 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R305 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R306 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R307 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R309 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R310 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R311 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R312 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R313 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R314 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R315 | 1-218-849-11 | s | RESISTOR,CHIP 1.2K 1/10W(1608) |
| R316 | 1-208-699-11 | s | RESISTOR,CHIP 4.7K 1/16W(1005) |
| R317 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R318 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R319 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R320 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R321 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R322 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R323 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R324 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R325 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R326 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R327 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R328 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R329 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R330 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R331 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R332 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R333 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R334 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R335 | 1-208-675-11 | s | RESISTOR CHIP 470 1/16W (1005) |
| R336 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R337 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R338 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R339 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R340 | 1-208-675-11 | s | RESISTOR CHIP 470 1/16W (1005) |
| R341 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R342 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R343 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R344 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R345 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R346 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R347 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R348 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R349 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R401 | 1-208-643-11 | s | RESISTOR CHIP 22 1/16W (1005) |
| R402 | 1-208-643-11 | s | RESISTOR CHIP 22 1/16W (1005) |
| R403 | 1-208-643-11 | s | RESISTOR CHIP 22 1/16W (1005) |
| R404 | 1-208-643-11 | s | RESISTOR CHIP 22 1/16W (1005) |
| R405 | 1-208-643-11 | s | RESISTOR CHIP 22 1/16W (1005) |
| R406 | 1-208-643-11 | s | RESISTOR CHIP 22 1/16W (1005) |
| R407 | 1-208-643-11 | s | RESISTOR CHIP 22 1/16W (1005) |
| R408 | 1-208-643-11 | s | RESISTOR CHIP 22 1/16W (1005) |
| R409 | 1-208-643-11 | s | RESISTOR CHIP 22 1/16W (1005) |
| R410 | 1-208-643-11 | s | RESISTOR CHIP 22 1/16W (1005) |
| R411 | 1-208-643-11 | s | RESISTOR CHIP 22 1/16W (1005) |
| R412 | 1-208-643-11 | s | RESISTOR CHIP 22 1/16W (1005) |
| R413 | 1-208-643-11 | s | RESISTOR CHIP 22 1/16W (1005) |
| R414 | 1-208-643-11 | s | RESISTOR CHIP 22 1/16W (1005) |
| R415 | 1-208-643-11 | s | RESISTOR CHIP 22 1/16W (1005) |

(PA-327 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R416 | 1-208-643-11 | s | RESISTOR CHIP 22 1/16W (1005) |
| R417 | 1-208-643-11 | s | RESISTOR CHIP 22 1/16W (1005) |
| R418 | 1-208-643-11 | s | RESISTOR CHIP 22 1/16W (1005) |
| R419 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R420 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R421 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R422 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R423 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R424 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R425 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R426 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R427 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R428 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R429 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R430 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R431 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R432 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R433 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R434 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R435 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R436 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R437 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R438 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R439 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R440 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R441 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R442 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R443 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R444 | 1-208-699-11 | s | RESISTOR,CHIP 4.7K 1/16W(1005) |
| R445 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R446 | 1-208-699-11 | s | RESISTOR,CHIP 4.7K 1/16W(1005) |
| R447 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R448 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R449 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R450 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R451 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R452 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R453 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R454 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R455 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R456 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R457 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R458 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R459 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R460 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R461 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R462 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R463 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R464 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R465 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R466 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R467 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R468 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R469 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R470 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R471 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R472 | 1-208-905-11 | s | RESISTOR, CHIP 5.6K (1005) |
| R473 *1 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| *2 | 1-208-867-81 | s | RES, CHIP 150 (1005) |
| R474 | 1-208-699-11 | s | RESISTOR,CHIP 4.7K 1/16W(1005) |

(PA-327 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R475 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R476 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R477 *1 | 1-208-643-11 | s | RESISTOR CHIP 22 1/16W (1005) |
| *2 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R478 | 1-208-643-11 | s | RESISTOR CHIP 22 1/16W (1005) |
| R479 | 1-208-643-11 | s | RESISTOR CHIP 22 1/16W (1005) |
| R480 | 1-208-643-11 | s | RESISTOR CHIP 22 1/16W (1005) |
| R481 | 1-208-643-11 | s | RESISTOR CHIP 22 1/16W (1005) |
| R482 | 1-208-643-11 | s | RESISTOR CHIP 22 1/16W (1005) |
| R483 | 1-208-643-11 | s | RESISTOR CHIP 22 1/16W (1005) |
| R484 | 1-208-643-11 | s | RESISTOR CHIP 22 1/16W (1005) |
| R485 | 1-208-643-11 | s | RESISTOR CHIP 22 1/16W (1005) |
| R486 | 1-208-643-11 | s | RESISTOR CHIP 22 1/16W (1005) |
| R487 | 1-208-643-11 | s | RESISTOR CHIP 22 1/16W (1005) |
| R488 | 1-208-643-11 | s | RESISTOR CHIP 22 1/16W (1005) |
| R489 | 1-208-643-11 | s | RESISTOR CHIP 22 1/16W (1005) |
| R490 | 1-208-643-11 | s | RESISTOR CHIP 22 1/16W (1005) |
| R491 | 1-208-643-11 | s | RESISTOR CHIP 22 1/16W (1005) |
| R492 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R493 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| RV101 | 1-227-405-21 | s | RES, ADJ, CERMET 220 |
| RV201 | 1-227-405-21 | s | RES, ADJ, CERMET 220 |
| RV301 | 1-227-405-21 | s | RES, ADJ, CERMET 220 |

---

SDI-84 BOARD (SUFFIX 12,13,14)

---

*1: [Board No. suffix 12]
*2: [Board No. suffix 13]
*3: [Board No. suffix 14]

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| 1pc | A-1099-252-A | s | MOUNTED CIRCUIT BOARD, SDI-84 |
| C101 | 1-100-620-91 | s | CAPACITOR, CHIP 47MF(3225) |
| C104 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C107 | 1-165-872-21 | s | CAPACITOR,SOLID ELECT 47MF |
| C108 *1 | 1-208-691-11 | s | METAL CHIP 2.2K 0.5% 1/16W |
| C109 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C115 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C116 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C119 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C120 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C122 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C123 | 1-100-620-91 | s | CAPACITOR, CHIP 47MF(3225) |
| C124 | 1-100-620-91 | s | CAPACITOR, CHIP 47MF(3225) |
| C125 | 1-126-400-11 | s | CAPACITOR ELECT 22MF/35V(CHIP) |
| C126 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C127 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C130 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C132 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C133 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C134 | 1-100-620-91 | s | CAPACITOR, CHIP 47MF(3225) |
| C135 | 1-100-620-91 | s | CAPACITOR, CHIP 47MF(3225) |
| C136 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C137 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C138 | 1-119-923-11 | s | CAPACITOR,CHIP CERAMIC 0.047MF |
| C141 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C142 | 1-119-923-11 | s | CAPACITOR,CHIP CERAMIC 0.047MF |
| C143 | 1-100-620-91 | s | CAPACITOR, CHIP 47MF(3225) |
| C144 | 1-100-620-91 | s | CAPACITOR, CHIP 47MF(3225) |
| C145 | 1-107-819-11 | s | CAP,CERAMIC 22000PF/16V(1005) |
| C146 | 1-164-936-11 | s | CAPACITOR,CHIP CERAMIC 680PF |
| C147 | 1-100-620-91 | s | CAPACITOR, CHIP 47MF(3225) |
| C148 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C149 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C150 | 1-100-620-91 | s | CAPACITOR, CHIP 47MF(3225) |
| C151 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C152 | 1-119-923-11 | s | CAPACITOR,CHIP CERAMIC 0.047MF |
| C155 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C156 | 1-119-923-11 | s | CAPACITOR,CHIP CERAMIC 0.047MF |
| C157 | 1-100-620-91 | s | CAPACITOR, CHIP 47MF(3225) |
| C158 | 1-100-620-91 | s | CAPACITOR, CHIP 47MF(3225) |
| C159 | 1-107-819-11 | s | CAP,CERAMIC 22000PF/16V(1005) |
| C160 | 1-164-936-11 | s | CAPACITOR,CHIP CERAMIC 680PF |
| C161 | 1-100-620-91 | s | CAPACITOR, CHIP 47MF(3225) |
| C162 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C163 *1 | 1-100-506-91 | s | CERAMIC CHIP 1UF 20% 6.3V |
| C164 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C165 | 1-100-620-91 | s | CAPACITOR, CHIP 47MF(3225) |
| C166 | 1-128-414-11 | s | CAPACITOR ELECT 220MF/6.3V |
| C167 | 1-164-874-11 | s | CAPACITOR,CHIP CERAMIC 100PF |
| C168 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C169 | 1-128-414-11 | s | CAPACITOR ELECT 220MF/6.3V |
| C170 | 1-164-874-11 | s | CAPACITOR,CHIP CERAMIC 100PF |
| C171 | 1-164-850-11 | s | CAPACITOR,CHIP CERAMIC 10PF/50 |
| C172 | 1-164-874-11 | s | CAPACITOR,CHIP CERAMIC 100PF |

(SDI-84 BOARD (SUFFIX 12,13,14))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C173 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C174 | 1-165-872-21 | s | CAPACITOR,SOLID ELECT 47MF |
| C175 | 1-100-507-91 | s | CAPACITOR,CERAMIC4.7MF C(1608) |
| C176 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C178 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C179 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C180 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C203 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C204 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C205 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C206 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C208 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C209 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C210 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C211 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C212 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C213 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C214 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C215 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C216 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C218 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C219 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C220 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C221 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C222 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C223 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C224 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C225 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C226 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C227 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C228 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C229 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C230 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C231 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C232 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C233 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C234 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C235 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C236 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C237 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C238 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C239 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C240 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C243 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C244 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C245 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C246 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C247 | 1-164-939-11 | s | CAPACITOR,CHIP CERAMIC 2200PF |
| C248 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C249 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C250 | 1-100-507-91 | s | CAPACITOR,CERAMIC4.7MF C(1608) |
| C251 | 1-100-507-91 | s | CAPACITOR,CERAMIC4.7MF C(1608) |
| C252 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C253 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C254 | 1-100-507-91 | s | CAPACITOR,CERAMIC4.7MF C(1608) |
| C255 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C256 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C257 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C258 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |

(SDI-84 BOARD (SUFFIX 12,13,14))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C259 | 1-100-507-91 | s | CAPACITOR,CERAMIC4.7MF C(1608) |
| C260 | 1-100-507-91 | s | CAPACITOR,CERAMIC4.7MF C(1608) |
| C261 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C262 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C263 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C264 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C265 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C266 | 1-100-507-91 | s | CAPACITOR,CERAMIC4.7MF C(1608) |
| C267 | 1-100-507-91 | s | CAPACITOR,CERAMIC4.7MF C(1608) |
| C268 | 1-100-507-91 | s | CAPACITOR,CERAMIC4.7MF C(1608) |
| C269 | 1-100-507-91 | s | CAPACITOR,CERAMIC4.7MF C(1608) |
| C270 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C271 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C272 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C273 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C274 | 1-100-507-91 | s | CAPACITOR,CERAMIC4.7MF C(1608) |
| C275 | 1-100-507-91 | s | CAPACITOR,CERAMIC4.7MF C(1608) |
| C289 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C401 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C403 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C407 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C410 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C414 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C416 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C417 | 1-216-864-11 | s | CONDUCTOR, CHIP (1608) |
| C418 | 1-216-864-11 | s | CONDUCTOR, CHIP (1608) |
| C420 | 1-100-507-91 | s | CAPACITOR,CERAMIC4.7MF C(1608) |
| C421 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C422 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C423 | 1-100-507-91 | s | CAPACITOR,CERAMIC4.7MF C(1608) |
| C424 | 1-164-939-11 | s | CAPACITOR,CHIP CERAMIC 2200PF |
| C425 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C426 | 1-164-939-11 | s | CAPACITOR,CHIP CERAMIC 2200PF |
| C427 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C428 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C429 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C430 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C431 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C432 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C433 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C436 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C438 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C439 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C441 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C443 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C444 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C445 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C446 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C447 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C448 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C449 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C450 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C451 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C452 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C453 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C454 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C455 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C456 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C457 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |

(SDI-84 BOARD (SUFFIX 12,13,14))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C458 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C459 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C460 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C461 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C462 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C463 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C464 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C465 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C466 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C467 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C468 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C469 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C470 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C471 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C472 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C473 | 1-164-850-11 | s | CAPACITOR,CHIP CERAMIC 10PF/50 |
| C474 | 1-164-850-11 | s | CAPACITOR,CHIP CERAMIC 10PF/50 |
| C475 | 1-125-891-11 | s | CAPACITOR CERAMIC 0.47MF/10V |
| C476 *2 | 1-125-891-91 | s | CERAMIC CHIP 0.47UF 10.00% 10V |
| C601 *1 | 1-216-295-91 | s | SHORT CHIP 0 |
| C602 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C603 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C604 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C605 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C606 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C607 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C608 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C609 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C610 | 1-100-507-91 | s | CAPACITOR,CERAMIC4.7MF C(1608) |
| C611 | 1-100-507-91 | s | CAPACITOR,CERAMIC4.7MF C(1608) |
| C612 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C613 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C614 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C617 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C618 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C619 | 1-100-507-91 | s | CAPACITOR,CERAMIC4.7MF C(1608) |
| C620 | 1-100-507-91 | s | CAPACITOR,CERAMIC4.7MF C(1608) |
| C621 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C623 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C625 | 1-100-507-91 | s | CAPACITOR,CERAMIC4.7MF C(1608) |
| C626 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C627 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C628 | 1-100-507-91 | s | CAPACITOR,CERAMIC4.7MF C(1608) |
| C629 | 1-164-939-11 | s | CAPACITOR,CHIP CERAMIC 2200PF |
| C630 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C631 | 1-164-939-11 | s | CAPACITOR,CHIP CERAMIC 2200PF |
| C632 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C633 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C634 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C635 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C636 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C637 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C638 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C639 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C640 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C641 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C642 | 1-125-891-11 | s | CAPACITOR CERAMIC 0.47MF/10V |
| C644 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C701 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |

(SDI-84 BOARD (SUFFIX 12,13,14))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C702 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C703 | 1-164-858-11 | s | CAPACITOR,CERAMIC 22PF/50V |
| C704 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C707 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C710 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C711 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C712 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C713 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C714 | 1-100-620-91 | s | CAPACITOR, CHIP 47MF(3225) |
| C715 | 1-100-620-91 | s | CAPACITOR, CHIP 47MF(3225) |
| C716 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C717 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C718 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C719 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C721 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C723 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C724 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C725 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C726 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C727 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C728 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C802 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C803 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C804 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C805 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C806 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C807 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C808 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C809 | 1-100-620-91 | s | CAPACITOR, CHIP 47MF(3225) |
| C810 | 1-164-850-11 | s | CAPACITOR,CHIP CERAMIC 10PF/50 |
| C812 | 1-164-866-11 | s | CAPACITOR,CHIP CERAMIC 47PF/50 |
| C813 | 1-100-620-91 | s | CAPACITOR, CHIP 47MF(3225) |
| C814 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C815 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C816 | 1-100-620-91 | s | CAPACITOR, CHIP 47MF(3225) |
| C852 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C853 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C854 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C855 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C856 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C857 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C858 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C859 | 1-100-620-91 | s | CAPACITOR, CHIP 47MF(3225) |
| C860 | 1-164-850-11 | s | CAPACITOR,CHIP CERAMIC 10PF/50 |
| C862 | 1-164-866-11 | s | CAPACITOR,CHIP CERAMIC 47PF/50 |
| C863 | 1-100-620-91 | s | CAPACITOR, CHIP 47MF(3225) |
| C864 | 1-100-620-91 | s | CAPACITOR, CHIP 47MF(3225) |
| C865 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C866 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C903 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C904 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C905 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C906 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C907 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C908 | 1-164-939-11 | s | CAPACITOR,CHIP CERAMIC 2200PF |
| C909 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C910 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C911 | 1-100-507-91 | s | CAPACITOR,CERAMIC4.7MF C(1608) |
| C912 | 1-100-507-91 | s | CAPACITOR,CERAMIC4.7MF C(1608) |

(SDI-84 BOARD (SUFFIX 12,13,14))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C913 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C914 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C915 | 1-100-507-91 | s | CAPACITOR,CERAMIC4.7MF C(1608) |
| C916 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C917 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C918 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C919 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C920 | 1-100-507-91 | s | CAPACITOR,CERAMIC4.7MF C(1608) |
| C921 | 1-100-507-91 | s | CAPACITOR,CERAMIC4.7MF C(1608) |
| C927 | 1-216-864-11 | s | CONDUCTOR, CHIP (1608) |
| C928 | 1-216-864-11 | s | CONDUCTOR, CHIP (1608) |
| C929 | 1-100-507-91 | s | CAPACITOR,CERAMIC4.7MF C(1608) |
| C930 | 1-100-507-91 | s | CAPACITOR,CERAMIC4.7MF C(1608) |
| C932 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C933 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C934 | 1-100-506-91 | s | CAPACITOR, CERAMIC 1MF B 1005 |
| C935 | 1-100-507-91 | s | CAPACITOR,CERAMIC4.7MF C(1608) |
| C936 | 1-100-507-91 | s | CAPACITOR,CERAMIC4.7MF C(1608) |
| C937 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C938 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C939 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C940 | 1-125-891-11 | s | CAPACITOR CERAMIC 0.47MF/10V |
| CN102 | 1-695-480-21 | o | PIN, CONNECTOR (PC BOARD) 2P |
| CN201 | 1-764-243-11 | o | CONNECTOR (COAXIAL) |
| CN202 | 1-764-080-21 | o | PIN, CONNECTOR (PC BOARD) 8P |
| CN601 | 1-764-243-11 | o | CONNECTOR (COAXIAL) |
| CN851 | 1-764-243-11 | o | CONNECTOR (COAXIAL) |
| CN901 | 1-764-243-11 | o | CONNECTOR (COAXIAL) |
| CP201 | ⚠ 1-417-611-11 | s | CONVERSION MODULE,E/O,EO-300 |
| CP401 | 1-417-612-11 | s | CONVERSION MODULE,O/E,OE-301 |
| D101 | 8-719-017-03 | s | DIODE 02DZ4.7-TPH3 |
| D102 | 8-719-017-03 | s | DIODE 02DZ4.7-TPH3 |
| D103 | 8-719-037-41 | s | DIODE RD20SB-T1 |
| D104 | 8-719-161-05 | s | DIODE RD8.2SB-T1 |
| D105 | 8-719-989-76 | s | DIODE SC802-04-TE12RA |
| D106 | 8-719-989-76 | s | DIODE SC802-04-TE12RA |
| D107 | 8-719-989-76 | s | DIODE SC802-04-TE12RA |
| D108 | 8-719-989-76 | s | DIODE SC802-04-TE12RA |
| D109 | 8-719-017-03 | s | DIODE 02DZ4.7-TPH3 |
| D110 | 8-719-017-03 | s | DIODE 02DZ4.7-TPH3 |
| D111*1,2 | 8-719-820-41 | s | DIODE 1SS302 |
| D112 | 8-719-159-10 | s | DIODE RD5.1SB-T2 |
| D113 | 8-719-159-10 | s | DIODE RD5.1SB-T2 |
| D114 | 8-719-820-41 | s | DIODE 1SS302 |
| D701 | 8-719-821-58 | s | DIODE 1SS271 |
| D702 | 8-719-820-41 | s | DIODE 1SS302 |
| E1 | 1-535-877-22 | s | CHIP,CHECKER (TEST POINT) |
| E2 | 1-535-877-22 | s | CHIP,CHECKER (TEST POINT) |
| FB101 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB102 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB103 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB104 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB105 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB106 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB201 | 1-414-554-21 | s | FERRITE, EMI(SMD) |
| FB202 | 1-414-554-21 | s | FERRITE, EMI(SMD) |

(SDI-84 BOARD (SUFFIX 12,13,14))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| FB203 | 1-414-554-21 | s | FERRITE, EMI(SMD) |
| FB204 | 1-414-554-21 | s | FERRITE, EMI(SMD) |
| FB205 | 1-414-554-21 | s | FERRITE, EMI(SMD) |
| FB206 | 1-414-554-21 | s | FERRITE, EMI(SMD) |
| FB207 | 1-414-554-21 | s | FERRITE, EMI(SMD) |
| FB208 | 1-414-554-21 | s | FERRITE, EMI(SMD) |
| FB209 | 1-414-554-21 | s | FERRITE, EMI(SMD) |
| FB210 | 1-414-554-21 | s | FERRITE, EMI(SMD) |
| FB211 | 1-414-554-21 | s | FERRITE, EMI(SMD) |
| FB212 | 1-414-554-21 | s | FERRITE, EMI(SMD) |
| FB213 | 1-414-554-21 | s | FERRITE, EMI(SMD) |
| FB402 | 1-414-554-21 | s | FERRITE, EMI(SMD) |
| FB403 | 1-414-554-21 | s | FERRITE, EMI(SMD) |
| FB404 | 1-414-554-21 | s | FERRITE, EMI(SMD) |
| FB405 | 1-414-554-21 | s | FERRITE, EMI(SMD) |
| FB406 | 1-414-554-21 | s | FERRITE, EMI(SMD) |
| FB407 | 1-414-554-21 | s | FERRITE, EMI(SMD) |
| FB408 | 1-414-554-21 | s | FERRITE, EMI(SMD) |
| FB409 | 1-414-554-21 | s | FERRITE, EMI(SMD) |
| FB410 | 1-414-554-21 | s | FERRITE, EMI(SMD) |
| FB601 | 1-414-554-21 | s | FERRITE, EMI(SMD) |
| FB602 | 1-414-554-21 | s | FERRITE, EMI(SMD) |
| FB603 | 1-414-554-21 | s | FERRITE, EMI(SMD) |
| FB604 | 1-414-554-21 | s | FERRITE, EMI(SMD) |
| FB605 | 1-414-554-21 | s | FERRITE, EMI(SMD) |
| FB606 | 1-414-554-21 | s | FERRITE, EMI(SMD) |
| FB607 | 1-414-554-21 | s | FERRITE, EMI(SMD) |
| FB608 | 1-414-554-21 | s | FERRITE, EMI(SMD) |
| FB609 | 1-414-554-21 | s | FERRITE, EMI(SMD) |
| FB610 | 1-414-554-21 | s | FERRITE, EMI(SMD) |
| FB611 | 1-414-554-21 | s | FERRITE, EMI(SMD) |
| FB901 | 1-414-554-21 | s | FERRITE, EMI(SMD) |
| FB902 | 1-414-554-21 | s | FERRITE, EMI(SMD) |
| FB903 | 1-414-554-21 | s | FERRITE, EMI(SMD) |
| FB904 | 1-414-554-21 | s | FERRITE, EMI(SMD) |
| FB905 | 1-414-554-21 | s | FERRITE, EMI(SMD) |
| FB906 | 1-414-554-21 | s | FERRITE, EMI(SMD) |
| FB907 | 1-414-554-21 | s | FERRITE, EMI(SMD) |
| FB908 | 1-414-554-21 | s | FERRITE, EMI(SMD) |
| FB909 | 1-414-554-21 | s | FERRITE, EMI(SMD) |
| FB910 | 1-414-554-21 | s | FERRITE, EMI(SMD) |
| FB912 | 1-414-554-21 | s | FERRITE, EMI(SMD) |
| FB913 | 1-414-554-21 | s | FERRITE, EMI(SMD) |
| FL801 | 1-233-345-21 | s | FILTER, LOW PASS (5.5MHZ) |
| FL851 | 1-233-345-21 | s | FILTER, LOW PASS (5.5MHZ) |
| IC101 | 8-759-327-01 | s | IC NJM062V-TE2 |
| IC102 | 8-759-327-01 | s | IC NJM062V-TE2 |
| IC103 | 8-759-327-01 | s | IC NJM062V-TE2 |
| IC104 | 6-704-976-01 | s | IC ADR381ART-REEL7 |
| IC105 | 6-706-482-01 | s | IC TC7SH00FU(T5RSOYJF) |
| IC106 | 6-701-572-01 | s | IC TPS54610PWPR |
| IC107 | 6-701-572-01 | s | IC TPS54610PWPR |
| IC109 | 8-759-359-49 | s | IC NJM3414AV (TE2) |
| IC110 | 6-706-482-01 | s | IC TC7SH00FU(T5RSOYJF) |
| IC111 | 8-759-327-01 | s | IC NJM062V-TE2 |
| IC112 | 8-759-338-95 | s | IC NJM2903V (TE2) |
| IC113 | 6-706-487-01 | s | IC TC7SH08FU(T5RSOYJF) |
| IC114 | 8-759-346-27 | s | IC LM45BIM3X |

(SDI-84 BOARD (SUFFIX 12,13,14))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| IC201 | 8-759-592-44 | s | IC TC7SZ04FU(TE85R) |
| IC202 | 8-759-472-43 | s | IC 74VHC245MTCX |
| IC204 | 8-759-363-26 | s | IC RN5VD28AA-TL |
| IC205 | 6-706-487-01 | s | IC TC7SH08FU(T5RSOYJF) |
| IC206 | 6-706-487-01 | s | IC TC7SH08FU(T5RSOYJF) |
| IC208 | 6-703-693-01 | s | IC GS1532-CFE3 |
| IC209 | 6-702-535-01 | s | IC MC100LVEL11DTR2 |
| IC210 | 6-702-621-01 | s | IC GS1528-CKAE3 |
| IC211 | 8-759-471-96 | s | IC 74VHC08MTCX |
| IC212 | 9-910-999-34 | s | DELETED FROM RP MASTER |
| IC217 | 8-759-592-49 | s | IC TC7SZ125FU(TE85R) |
| IC218 | 8-759-592-44 | s | IC TC7SZ04FU(TE85R) |
| IC219 | 8-759-592-44 | s | IC TC7SZ04FU(TE85R) |
| IC220 | 8-759-592-44 | s | IC TC7SZ04FU(TE85R) |
| IC221 | 8-759-592-44 | s | IC TC7SZ04FU(TE85R) |
| IC401 | 6-706-487-01 | s | IC TC7SH08FU(T5RSOYJF) |
| IC403 | 6-709-052-01 | s | IC GS1561-CFE3 |
| IC404 | 8-759-592-49 | s | IC TC7SZ125FU(TE85R) |
| IC405 | 8-759-592-44 | s | IC TC7SZ04FU(TE85R) |
| IC407 | 8-759-472-43 | s | IC 74VHC245MTCX |
| IC409 | 8-759-592-42 | s | IC TC7SZ00FU(TE85R) |
| IC410 | 6-700-804-01 | s | IC SN74LVC574APWR |
| IC411 | 6-700-804-01 | s | IC SN74LVC574APWR |
| IC412 | 6-700-804-01 | s | IC SN74LVC574APWR |
| IC413 | 6-700-804-01 | s | IC SN74LVC574APWR |
| IC414 | 6-700-804-01 | s | IC SN74LVC574APWR |
| IC415 | 6-700-804-01 | s | IC SN74LVC574APWR |
| IC416 | 8-759-592-42 | s | IC TC7SZ00FU(TE85R) |
| IC417 | 8-759-592-42 | s | IC TC7SZ00FU(TE85R) |
| IC418 | 8-759-592-42 | s | IC TC7SZ00FU(TE85R) |
| IC602 | 8-759-592-49 | s | IC TC7SZ125FU(TE85R) |
| IC604 | 6-706-482-01 | s | IC TC7SH00FU(T5RSOYJF) |
| IC606 | 8-759-592-49 | s | IC TC7SZ125FU(TE85R) |
| IC701 | 6-706-482-01 | s | IC TC7SH00FU(T5RSOYJF) |
| IC702 | 8-759-327-01 | s | IC NJM062V-TE2 |
| IC703 | 6-706-482-01 | s | IC TC7SH00FU(T5RSOYJF) |
| IC704 | 6-708-506-01 | s | IC ML86V7666TBZ03A |
| IC801 | 8-752-334-64 | s | IC CXD1171M |
| IC802 | 8-759-561-46 | s | IC AD8014ART-REEL7 |
| IC851 | 8-752-334-64 | s | IC CXD1171M |
| IC852 | 8-759-561-46 | s | IC AD8014ART-REEL7 |
| IC904 | 8-759-592-49 | s | IC TC7SZ125FU(TE85R) |
| IC905 | 8-759-592-49 | s | IC TC7SZ125FU(TE85R) |
| JC102 *1 | 1-216-864-91 | s | SHORT CHIP 0 |
| JC103 *1 | 1-216-864-91 | s | SHORT CHIP 0 |
| L101*1,2 | 1-416-948-21 | s | COIL, CHOKE (SMD) |
| *3 | 1-457-205-21 | s | INDUCTOR 3.3UH |
| L102 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L103 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L104 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L105 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L106 | 1-416-344-11 | s | COIL, CHOKE 10UH |
| L107 | 1-416-344-11 | s | COIL, CHOKE 10UH |
| L108 | 1-416-344-11 | s | COIL, CHOKE 10UH |
| L201 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |
| L202 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |
| L203 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |
| L204 | 1-414-457-11 | s | INDUCTOR, CHIP (S) 3.3NH |

(SDI-84 BOARD (SUFFIX 12,13,14))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| L205 | 1-414-457-11 | s | INDUCTOR, CHIP (S) 3.3NH |
| L401 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |
| L402 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |
| L403 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |
| L404 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |
| L601 | 1-414-461-31 | s | INDUCTOR, CHIP (K) 6.8NH |
| L602 | 1-414-461-31 | s | INDUCTOR, CHIP (K) 6.8NH |
| L604 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L605 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L703 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L704 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L706 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L707 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L801 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L802 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L803 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L804 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L851 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L852 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L853 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L854 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L902 | 1-414-457-11 | s | INDUCTOR, CHIP (S) 3.3NH |
| L903 | 1-414-457-11 | s | INDUCTOR, CHIP (S) 3.3NH |
| Q101 | 8-729-032-74 | s | TRANSISTOR 2SA1615-Z-K |
| Q102 | 8-729-927-99 | s | TRANSISTOR 2SC4617R |
| Q103 | 8-729-032-74 | s | TRANSISTOR 2SA1615-Z-K |
| Q104 | 8-729-927-99 | s | TRANSISTOR 2SC4617R |
| Q105 *1 | 8-729-928-19 | s | TRANSISTOR 2SA1774TL-QR |
| *2 | 8-729-102-84 | s | TRANSISTOR 2SB624-T1BV5 |
| Q106 | 8-729-927-99 | s | TRANSISTOR 2SC4617R |
| Q107 | 8-729-927-99 | s | TRANSISTOR 2SC4617R |
| Q108 | 8-729-807-51 | s | TRANSISTOR 2SD1623-S |
| Q109 | 8-729-928-81 | s | TRANSISTOR DTC144EE |
| Q110 | 8-729-041-23 | s | TRANSISTOR NDS356AP |
| Q111 | 8-729-928-19 | s | TRANSISTOR 2SA1774R |
| Q112 | 8-729-927-99 | s | TRANSISTOR 2SC4617R |
| Q113 | 8-729-928-36 | s | TRANSISTOR DTA114EE |
| Q114 | 8-729-928-36 | s | TRANSISTOR DTA114EE |
| Q115 | 8-729-928-81 | s | TRANSISTOR DTC144EE |
| Q116 | 8-729-928-19 | s | TRANSISTOR 2SA1774R |
| Q117 | 8-729-927-99 | s | TRANSISTOR 2SC4617R |
| Q118 | 8-729-928-81 | s | TRANSISTOR DTC144EE |
| Q119 | 8-729-928-81 | s | TRANSISTOR DTC144EE |
| Q120 | 8-729-927-99 | s | TRANSISTOR 2SC4617R |
| Q201 | 8-729-927-99 | s | TRANSISTOR 2SC4617R |
| Q202 | 8-729-928-27 | s | TRANSISTOR DTA144EE |
| Q203 | 8-729-928-81 | s | TRANSISTOR DTC144EE |
| Q204 | 8-729-041-23 | s | TRANSISTOR NDS356AP |
| Q205 | 8-729-041-23 | s | TRANSISTOR NDS356AP |
| Q401 | 8-729-928-81 | s | TRANSISTOR DTC144EE |
| Q402 | 8-729-928-27 | s | TRANSISTOR DTA144EE |
| Q403 | 8-729-928-81 | s | TRANSISTOR DTC144EE |
| Q404 | 8-729-928-27 | s | TRANSISTOR DTA144EE |
| Q406 | 8-729-041-23 | s | TRANSISTOR NDS356AP |
| Q409 | 8-729-041-23 | s | TRANSISTOR NDS356AP |
| Q412 | 8-729-041-23 | s | TRANSISTOR NDS356AP |
| Q601 | 8-729-046-30 | s | TRANSISTOR 2SC5245-4/5-TL-E |
| Q603 | 8-729-927-99 | s | TRANSISTOR 2SC4617R |
| Q604 | 8-729-928-19 | s | TRANSISTOR 2SA1774R |

(SDI-84 BOARD (SUFFIX 12,13,14))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| Q606 | 8-729-927-99 | s | TRANSISTOR 2SC4617R |
| Q607 | 8-729-928-27 | s | TRANSISTOR DTA144EE |
| Q608 | 8-729-928-81 | s | TRANSISTOR DTC144EE |
| Q610 | 8-729-928-27 | s | TRANSISTOR DTA144EE |
| Q611 | 8-729-928-81 | s | TRANSISTOR DTC144EE |
| Q905 | 8-729-928-27 | s | TRANSISTOR DTA144EE |
| Q906 | 8-729-928-81 | s | TRANSISTOR DTC144EE |
| R101 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R102 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R103*1,2 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| *3 | 1-208-895-81 | s | METAL CHIP 2.2K 1/16W |
| R104 | 1-208-923-11 | s | RESISTOR, CHIP 33K (1005) |
| R105 | 1-208-923-11 | s | RESISTOR, CHIP 33K (1005) |
| R106 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R107 *1 | 1-208-879-81 | s | METAL CHIP 470 0.5% 1/16W |
| *2 | 1-218-945-11 | s | METAL CHIP 220 0.5% 1/16W |
| R108 | 1-208-691-11 | s | RESISTOR CHIP 2.2K 1/16W(1005) |
| R109 | 1-208-923-11 | s | RESISTOR, CHIP 33K (1005) |
| R110 | 1-208-923-11 | s | RESISTOR, CHIP 33K (1005) |
| R111 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R112 | 1-208-923-11 | s | RESISTOR, CHIP 33K (1005) |
| R113 | 1-208-703-11 | s | RESISTOR,CHIP 6.8K 1/16W(1005) |
| R114 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R115 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R116 | 1-208-923-11 | s | RESISTOR, CHIP 33K (1005) |
| R117 | 1-208-923-11 | s | RESISTOR, CHIP 33K (1005) |
| R118 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R119 | 1-208-931-11 | s | RESISTOR, CHIP 68K (1005) |
| R120 | 1-208-931-11 | s | RESISTOR, CHIP 68K (1005) |
| R121 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R122 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R123 | 1-216-833-11 | s | RESISTOR,CHIP 10K 1/10W (1608) |
| R124 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R125 | 1-216-833-11 | s | RESISTOR,CHIP 10K 1/10W (1608) |
| R126 | 1-216-833-11 | s | RESISTOR,CHIP 10K 1/10W (1608) |
| R127 | 1-216-833-11 | s | RESISTOR,CHIP 10K 1/10W (1608) |
| R128 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R129 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R130 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R131 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R132 | 1-208-923-11 | s | RESISTOR, CHIP 33K (1005) |
| R133 | 1-208-923-11 | s | RESISTOR, CHIP 33K (1005) |
| R134 | 1-208-699-11 | s | RESISTOR,CHIP 4.7K 1/16W(1005) |
| R135 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R136 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R137 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R138 | 1-208-923-11 | s | RESISTOR, CHIP 33K (1005) |
| R139 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R141 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R142 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R143 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R144 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R145 | 1-208-687-11 | s | RESISTOR CHIP 1.5K 1/16W (1005 |
| R146 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R147 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R148 | 1-208-703-11 | s | RESISTOR,CHIP 6.8K 1/16W(1005) |
| R149 | 1-208-703-11 | s | RESISTOR,CHIP 6.8K 1/16W(1005) |
| R150 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R151 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |

(SDI-84 BOARD (SUFFIX 12,13,14))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R152 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R153 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R154 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R155 | 1-208-687-11 | s | RESISTOR CHIP 1.5K 1/16W (1005 |
| R156 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R157 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R158 | 1-208-703-11 | s | RESISTOR,CHIP 6.8K 1/16W(1005) |
| R159 | 1-208-687-11 | s | RESISTOR CHIP 1.5K 1/16W (1005 |
| R160 | 1-208-687-11 | s | RESISTOR CHIP 1.5K 1/16W (1005 |
| R161 *1 | 1-208-695-11 | s | METAL CHIP 3.3K 0.5% 1/16W |
| R162 *1 | 1-208-703-11 | s | METAL CHIP 6.8K 0.5% 1/16W |
| R164 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R165 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R166 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R167 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R168 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R169*1,2 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| *3 | 1-208-887-81 | s | METAL CHIP 1K 1/16W |
| R170*1,2 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| *3 | 1-208-887-81 | s | METAL CHIP 1K 1/16W |
| R171 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R172 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R173 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R174 | 1-208-695-11 | s | RESISTOR CHIP 3.3K 1/16W(1005) |
| R175 | 1-208-695-11 | s | RESISTOR CHIP 3.3K 1/16W(1005) |
| R176 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R177 | 1-208-679-11 | s | RESISTOR CHIP 680 1/16W (1005) |
| R178 | 1-208-679-11 | s | RESISTOR CHIP 680 1/16W (1005) |
| R179 | 1-208-703-11 | s | RESISTOR,CHIP 6.8K 1/16W(1005) |
| R180 | 1-208-703-11 | s | RESISTOR,CHIP 6.8K 1/16W(1005) |
| R181 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R182 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R183 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R184 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R185 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R186 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R187 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R188 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R189 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R190 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R191 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R192 | 1-208-923-11 | s | RESISTOR, CHIP 33K (1005) |
| R193 | 1-208-675-11 | s | RESISTOR CHIP 470 1/16W (1005) |
| R194 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R195 | 1-208-663-11 | s | RESISTOR CHIP 150 1/16W (1005) |
| R196 *3 | 1-208-895-81 | s | METAL CHIP 2.2K 1/16W |
| R197 *2 | 1-208-691-11 | s | METAL CHIP 2.2K 0.5% 1/16W |
| R198 *3 | 1-242-967-81 | s | RES CHIP 1 1/16W |
| R199 *3 | 1-242-967-81 | s | RES CHIP 1 1/16W |
| R201 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R202 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R203 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R204 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R205 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R206 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R207 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R208 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R209 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R210 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |

(SDI-84 BOARD (SUFFIX 12,13,14))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R211 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R213 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R214 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R216 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R218 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R220 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R221 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R222 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R224 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R225 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R226 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R227 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R228 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R229 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R235 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R237 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R238 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R239 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R240 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R241 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R242 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R243 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R244 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R245 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R246 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R247 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R248 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R249 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R250 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R252 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R253 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R254 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R255 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R256 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R257 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R258 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R259 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R260 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R261 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R262 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R263 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R264 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R265 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R266 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R267 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R268 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R269 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R270 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R271 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R273 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R277 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R279 | 1-208-711-11 | s | RESISTOR CHIP 15K 1/16W (1005) |
| R281 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R282 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R284 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R285 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R286 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R287 | 1-218-939-11 | s | RESISTOR, CHIP 68 1/16W (1005) |
| R288 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |

(SDI-84 BOARD (SUFFIX 12,13,14))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R289 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R290 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R291 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R292 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R294 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R295 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R296 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R297 | 1-208-652-11 | s | RESISTOR CHIP 51 1/16W (1005) |
| R298 | 1-208-652-11 | s | RESISTOR CHIP 51 1/16W (1005) |
| R299 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R300 | 1-208-652-11 | s | RESISTOR CHIP 51 1/16W (1005) |
| R301 | 1-208-699-11 | s | RESISTOR,CHIP 4.7K 1/16W(1005) |
| R302 | 1-208-652-11 | s | RESISTOR CHIP 51 1/16W (1005) |
| R303 | 1-208-695-11 | s | RESISTOR CHIP 3.3K 1/16W(1005) |
| R304 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R305 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R306 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R307 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R308 | 1-208-699-11 | s | RESISTOR,CHIP 4.7K 1/16W(1005) |
| R309 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R310 | 1-208-652-11 | s | RESISTOR CHIP 51 1/16W (1005) |
| R311 | 1-208-652-11 | s | RESISTOR CHIP 51 1/16W (1005) |
| R312 | 1-208-647-11 | s | RESISTOR CHIP 33 1/16W (1005) |
| R313 | 1-208-679-11 | s | RESISTOR CHIP 680 1/16W (1005) |
| R314 | 1-208-860-11 | s | RESISTOR CHIP 75 1/16W (1005) |
| R315 | 1-208-860-11 | s | RESISTOR CHIP 75 1/16W (1005) |
| R316 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R317 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R318 | 1-208-860-11 | s | RESISTOR CHIP 75 1/16W (1005) |
| R320 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R322 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R323 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R324 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R325 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R349 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R350 | 1-208-691-11 | s | RESISTOR CHIP 2.2K 1/16W(1005) |
| R352 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R353 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R354 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R355 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R356 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R357 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R358 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R359 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R401 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R402 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R404 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R414 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R422 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R427 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R429 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R430 | 1-208-699-11 | s | RESISTOR,CHIP 4.7K 1/16W(1005) |
| R431 | 1-208-699-11 | s | RESISTOR,CHIP 4.7K 1/16W(1005) |
| R432 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R433 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R434 | 1-208-703-11 | s | RESISTOR,CHIP 6.8K 1/16W(1005) |
| R436 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R437 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R438 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |

(SDI-84 BOARD (SUFFIX 12,13,14))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R440 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R441 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R442 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R443 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R444 | 1-208-691-11 | s | RESISTOR CHIP 2.2K 1/16W(1005) |
| R445 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R446 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R449 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R451 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R453 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R456 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R457 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R458 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R459 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R463 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R464 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R466 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R467 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R469 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R471 | 1-208-691-11 | s | RESISTOR CHIP 2.2K 1/16W(1005) |
| R473 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R474 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R475 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R476 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R477 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R478 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R479 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R480 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R481 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R482 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R483 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R484 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R485 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R486 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R487 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R488 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R489 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R490 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R491 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R494 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R495 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R496 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R497 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R500 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R501 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R601 | 1-208-860-11 | s | RESISTOR CHIP 75 1/16W (1005) |
| R602 | 1-208-663-11 | s | RESISTOR CHIP 150 1/16W (1005) |
| R603 | 1-208-663-11 | s | RESISTOR CHIP 150 1/16W (1005) |
| R604 | 1-208-671-11 | s | RESISTOR CHIP 330 1/16W (1005) |
| R606 | 1-208-695-11 | s | RESISTOR CHIP 3.3K 1/16W(1005) |
| R607 | 1-208-860-11 | s | RESISTOR CHIP 75 1/16W (1005) |
| R608 | 1-208-860-11 | s | RESISTOR CHIP 75 1/16W (1005) |
| R610 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R611 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R612 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R613 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R614 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R615 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R616 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |

(SDI-84 BOARD (SUFFIX 12,13,14))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R617 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R618 | 1-208-691-11 | s | RESISTOR CHIP 2.2K 1/16W(1005) |
| R619 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R620 | 1-208-652-11 | s | RESISTOR CHIP 51 1/16W (1005) |
| R621 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R622 | 1-208-652-11 | s | RESISTOR CHIP 51 1/16W (1005) |
| R623 | 1-208-699-11 | s | RESISTOR,CHIP 4.7K 1/16W(1005) |
| R624 | 1-208-695-11 | s | RESISTOR CHIP 3.3K 1/16W(1005) |
| R628 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R630 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R631 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R633 | 1-208-699-11 | s | RESISTOR,CHIP 4.7K 1/16W(1005) |
| R634 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R636 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R638 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R640 | 1-208-699-11 | s | RESISTOR,CHIP 4.7K 1/16W(1005) |
| R641 | 1-208-699-11 | s | RESISTOR,CHIP 4.7K 1/16W(1005) |
| R642 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R644 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R645 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R646 | 1-208-703-11 | s | RESISTOR,CHIP 6.8K 1/16W(1005) |
| R648 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R649 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R651 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R652 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R653 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R654 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R656 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R657 | 1-208-691-11 | s | RESISTOR CHIP 2.2K 1/16W(1005) |
| R658 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R659 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R661 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R663 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R665 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R666 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R667 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R668 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R669 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R670 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R671 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R672 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R673 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R674 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R675 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R676 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R677 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R683 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R687 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R701 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R703 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R704 | 1-218-985-11 | s | RESISTOR CHIP 470K 1/16W(1005) |
| R705 | 1-208-703-11 | s | RESISTOR,CHIP 6.8K 1/16W(1005) |
| R706 | 1-208-939-11 | s | RESISTOR, CHIP 150K (1005) |
| R707 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R708 | 1-208-923-11 | s | RESISTOR, CHIP 33K (1005) |
| R709 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R710 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R711 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R713 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |

(SDI-84 BOARD (SUFFIX 12,13,14))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R714 | 1-208-703-11 | s | RESISTOR,CHIP 6.8K 1/16W(1005) |
| R715 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R716 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R717 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R718 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R720 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R722 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R723 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R724 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R725 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R726 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R728 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R730 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R732 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R734 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R736 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R738 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R740 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R741 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R742 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R744 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R745 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R746 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R747 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R748 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R749 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R801 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R803 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R804 | 1-208-699-11 | s | RESISTOR,CHIP 4.7K 1/16W(1005) |
| R805 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R806 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R807 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R808 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R809 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R810 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R811 | 1-208-671-11 | s | RESISTOR CHIP 330 1/16W (1005) |
| R812 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R814 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R815 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R816 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R817 | 1-208-675-11 | s | RESISTOR CHIP 470 1/16W (1005) |
| R818 | 1-208-703-11 | s | RESISTOR,CHIP 6.8K 1/16W(1005) |
| R819 | 1-208-663-11 | s | RESISTOR CHIP 150 1/16W (1005) |
| R820 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R821 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R822 | 1-208-691-11 | s | RESISTOR CHIP 2.2K 1/16W(1005) |
| R823 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R824 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R825 | 1-208-663-11 | s | RESISTOR CHIP 150 1/16W (1005) |
| R826 | 1-208-663-11 | s | RESISTOR CHIP 150 1/16W (1005) |
| R851 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R853 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R854 | 1-208-699-11 | s | RESISTOR,CHIP 4.7K 1/16W(1005) |
| R855 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R856 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R857 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R858 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R859 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R860 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |

(SDI-84 BOARD (SUFFIX 12,13,14))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R861 | 1-208-671-11 | s | RESISTOR CHIP 330 1/16W (1005) |
| R862 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R864 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R865 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R866 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R867 | 1-208-703-11 | s | RESISTOR,CHIP 6.8K 1/16W(1005) |
| R868 | 1-208-675-11 | s | RESISTOR CHIP 470 1/16W (1005) |
| R869 | 1-208-663-11 | s | RESISTOR CHIP 150 1/16W (1005) |
| R870 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R871 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R872 | 1-208-691-11 | s | RESISTOR CHIP 2.2K 1/16W(1005) |
| R873 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R874 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R875 | 1-208-663-11 | s | RESISTOR CHIP 150 1/16W (1005) |
| R876 | 1-208-663-11 | s | RESISTOR CHIP 150 1/16W (1005) |
| R904 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R905 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R909 | 1-208-711-11 | s | RESISTOR CHIP 15K 1/16W (1005) |
| R910 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R911 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R912 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R913 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R914 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R915 | 1-218-939-11 | s | RESISTOR, CHIP 68 1/16W (1005) |
| R916 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R917 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R918 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R919 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R920 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R922 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R923 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R924 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R925 | 1-208-652-11 | s | RESISTOR CHIP 51 1/16W (1005) |
| R926 | 1-208-652-11 | s | RESISTOR CHIP 51 1/16W (1005) |
| R938 | 1-208-652-11 | s | RESISTOR CHIP 51 1/16W (1005) |
| R939 | 1-208-652-11 | s | RESISTOR CHIP 51 1/16W (1005) |
| R940 | 1-208-647-11 | s | RESISTOR CHIP 33 1/16W (1005) |
| R941 | 1-208-679-11 | s | RESISTOR CHIP 680 1/16W (1005) |
| R942 | 1-208-860-11 | s | RESISTOR CHIP 75 1/16W (1005) |
| R943 | 1-208-860-11 | s | RESISTOR CHIP 75 1/16W (1005) |
| R944 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R945 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R946 | 1-208-860-11 | s | RESISTOR CHIP 75 1/16W (1005) |
| R948 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R950 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R954 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R955 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R956 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R957 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R958 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R959 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| RB201 | 1-234-371-11 | s | RES, NETWORK 47X4 (1005) |
| RB202 | 1-234-371-11 | s | RES, NETWORK 47X4 (1005) |
| RB203 | 1-234-371-11 | s | RES, NETWORK 47X4 (1005) |
| RB204 | 1-234-371-11 | s | RES, NETWORK 47X4 (1005) |
| RB205 | 1-234-371-11 | s | RES, NETWORK 47X4 (1005) |
| RB206 | 1-234-371-11 | s | RES, NETWORK 47X4 (1005) |
| RB207 | 1-234-371-11 | s | RES, NETWORK 47X4 (1005) |

(SDI-84 BOARD (SUFFIX 12,13,14))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| RB208 | 1-234-371-11 | s | RES, NETWORK 47X4 (1005) |
| RB209 | 1-234-371-11 | s | RES, NETWORK 47X4 (1005) |
| RB210 | 1-234-371-11 | s | RES, NETWORK 47X4 (1005) |
| RB211 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB212 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB213 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB214 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB215 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB216 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB222 | 1-234-381-21 | s | RES, NETWORK 100KX4 (1005) |
| RB223 | 1-234-381-21 | s | RES, NETWORK 100KX4 (1005) |
| RB224 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB225 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB226 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB227 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB228 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB401 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB402 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB403 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB404 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB405 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB406 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB407 | 1-234-371-11 | s | RES, NETWORK 47X4 (1005) |
| RB413 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB414 | 1-234-371-11 | s | RES, NETWORK 47X4 (1005) |
| RB415 | 1-234-371-11 | s | RES, NETWORK 47X4 (1005) |
| RB416 | 1-234-371-11 | s | RES, NETWORK 47X4 (1005) |
| RB417 | 1-234-371-11 | s | RES, NETWORK 47X4 (1005) |
| RB418 | 1-234-371-11 | s | RES, NETWORK 47X4 (1005) |
| RB419 | 1-234-371-11 | s | RES, NETWORK 47X4 (1005) |
| RB420 | 1-234-371-11 | s | RES, NETWORK 47X4 (1005) |
| RB421 | 1-234-371-11 | s | RES, NETWORK 47X4 (1005) |
| RB422 | 1-234-371-11 | s | RES, NETWORK 47X4 (1005) |
| RB423 | 1-234-371-11 | s | RES, NETWORK 47X4 (1005) |
| RB424 | 1-234-371-11 | s | RES, NETWORK 47X4 (1005) |
| RB425 | 1-234-371-11 | s | RES, NETWORK 47X4 (1005) |
| RB601 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB602 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB603 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB604 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB701 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB702 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB801 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB802 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB851 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB852 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB901 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB902 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB903 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB904 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB905 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| S201 | 1-692-271-31 | s | SWITCH, SLIDE |
| S202 | 1-771-721-11 | s | SWITCH, TACTILE |
| TP203 | 1-535-877-22 | s | CHIP,CHECKER (TEST POINT) |
| TP401 | 1-535-877-22 | s | CHIP,CHECKER (TEST POINT) |
| TP603 | 1-535-877-22 | s | CHIP,CHECKER (TEST POINT) |
| TP701 | 1-535-877-22 | s | CHIP,CHECKER (TEST POINT) |
| TP702 | 1-535-877-22 | s | CHIP,CHECKER (TEST POINT) |

(SDI-84 BOARD (SUFFIX 12,13,14))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| TP801 | 1-535-877-22 | s | CHIP,CHECKER (TEST POINT) |
| TP851 | 1-535-877-22 | s | CHIP,CHECKER (TEST POINT) |
| VDR101*3 | 1-804-499-21 | s | VRISTOR, CHIP (1608) |
| X201 | 1-795-872-11 | s | OSCILLATOR |
| X401 | 1-795-872-11 | s | OSCILLATOR |

---
SDI-84C BOARD (SUFFIX 13,14)
---

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| 1pc | A-1179-311-A | s | MOUNTED CIRCUIT BOARD, SDI-84C |
| C101 | 1-100-620-91 | s | CAP, CHIP CERAMIC 47MF B(3225) |
| C104 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C107 | 1-165-872-21 | s | CAP, ELECT 47MF (5.0X6.5) |
| C109 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C115 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C116 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C119 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C120 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C122 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C123 | 1-100-620-91 | s | CAP, CHIP CERAMIC 47MF B(3225) |
| C124 | 1-100-620-91 | s | CAP, CHIP CERAMIC 47MF B(3225) |
| C125 | 1-126-400-21 | s | CAP, CHIP ELECT 22MF(6.3X5.7) |
| C126 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C127 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C130 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C132 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C133 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C134 | 1-100-620-91 | s | CAP, CHIP CERAMIC 47MF B(3225) |
| C135 | 1-100-620-91 | s | CAP, CHIP CERAMIC 47MF B(3225) |
| C136 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C137 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C138 | 1-119-923-81 | s | CAP, CERAMIC 0.047MF B 1005 |
| C141 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C142 | 1-119-923-81 | s | CAP, CERAMIC 0.047MF B 1005 |
| C143 | 1-100-620-91 | s | CAP, CHIP CERAMIC 47MF B(3225) |
| C144 | 1-100-620-91 | s | CAP, CHIP CERAMIC 47MF B(3225) |
| C145 | 1-107-819-81 | s | CAP,CHIP CERAMIC 22000PF B1005 |
| C146 | 1-164-936-81 | s | CAP, CHIP CERAMIC 680PF B 1005 |
| C147 | 1-100-620-91 | s | CAP, CHIP CERAMIC 47MF B(3225) |
| C148 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C149 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C150 | 1-100-620-91 | s | CAP, CHIP CERAMIC 47MF B(3225) |
| C151 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C152 | 1-119-923-81 | s | CAP, CERAMIC 0.047MF B 1005 |
| C155 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C156 | 1-119-923-81 | s | CAP, CERAMIC 0.047MF B 1005 |
| C157 | 1-100-620-91 | s | CAP, CHIP CERAMIC 47MF B(3225) |
| C158 | 1-100-620-91 | s | CAP, CHIP CERAMIC 47MF B(3225) |
| C159 | 1-107-819-81 | s | CAP,CHIP CERAMIC 22000PF B1005 |
| C160 | 1-164-936-81 | s | CAP, CHIP CERAMIC 680PF B 1005 |
| C161 | 1-100-620-91 | s | CAP, CHIP CERAMIC 47MF B(3225) |
| C162 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C164 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C165 | 1-100-620-91 | s | CAP, CHIP CERAMIC 47MF B(3225) |
| C166 | 1-128-414-21 | s | CAP, CHIP ELECT 220MF |
| C167 | 1-164-874-81 | s | CAP,CHIP CERAMIC 100PF CH 1005 |
| C168 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C169 | 1-128-414-21 | s | CAP, CHIP ELECT 220MF |
| C170 | 1-164-874-81 | s | CAP,CHIP CERAMIC 100PF CH 1005 |
| C171 | 1-164-850-81 | s | CAP, CHIP CERAMIC 10PF CH 1005 |
| C172 | 1-164-874-81 | s | CAP,CHIP CERAMIC 100PF CH 1005 |
| C173 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C174 | 1-165-872-21 | s | CAP, ELECT 47MF (5.0X6.5) |
| C175 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C176 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |

(SDI-84C BOARD (SUFFIX 13,14))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C177 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C178 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C179 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C180 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C203 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C204 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C205 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C206 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C208 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C209 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C210 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C211 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C212 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C213 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C214 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C215 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C216 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C218 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C219 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C220 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C221 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C222 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C223 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C224 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C225 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C226 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C227 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C228 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C229 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C230 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C231 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C232 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C233 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C234 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C235 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C236 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C237 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C238 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C239 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C240 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C243 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C244 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C245 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C246 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C247 | 1-164-939-81 | s | CAP, CHIPCERAMIC 2200PF B 1005 |
| C248 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C249 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C250 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C251 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C252 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C253 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C254 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C255 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C256 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C257 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C258 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C259 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C260 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C261 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |

(SDI-84C BOARD (SUFFIX 13,14))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C262 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C263 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C264 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C265 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C266 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C267 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C268 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C269 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C270 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C271 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C272 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C273 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C274 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C275 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C289 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C401 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C403 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C407 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C410 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C414 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C416 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C417 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| C418 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| C420 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C421 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C422 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C423 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C424 | 1-164-939-81 | s | CAP, CHIPCERAMIC 2200PF B 1005 |
| C425 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C426 | 1-164-939-81 | s | CAP, CHIPCERAMIC 2200PF B 1005 |
| C427 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C428 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C429 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C430 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C431 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C432 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C433 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C436 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C438 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C439 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C441 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C443 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C444 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C445 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C446 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C447 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C448 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C449 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C450 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C451 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C452 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C453 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C454 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C455 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C456 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C457 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C458 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C459 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C460 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |

(SDI-84C BOARD (SUFFIX 13,14))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C461 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C462 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C463 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C464 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C465 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C466 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C467 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C468 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C469 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C470 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C471 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C472 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C473 | 1-164-850-81 | s | CAP, CHIP CERAMIC 10PF CH 1005 |
| C474 | 1-164-850-81 | s | CAP, CHIP CERAMIC 10PF CH 1005 |
| C475 | 1-125-891-91 | s | CAP, CHIP CERAMIC0.47MF B 1608 |
| C476 | 1-125-891-91 | s | CAP, CHIP CERAMIC0.47MF B 1608 |
| C704 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C707 | 1-216-295-91 | s | CONDUCTOR, CHIP (2012) |
| C802 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C803 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C804 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C805 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C806 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C807 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C808 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C809 | 1-100-620-91 | s | CAP, CHIP CERAMIC 47MF B(3225) |
| C810 | 1-164-850-81 | s | CAP, CHIP CERAMIC 10PF CH 1005 |
| C812 | 1-164-866-81 | s | CAP, CHIP CERAMIC 47PF CH 1005 |
| C813 | 1-100-620-91 | s | CAP, CHIP CERAMIC 47MF B(3225) |
| C814 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C815 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C816 | 1-100-620-91 | s | CAP, CHIP CERAMIC 47MF B(3225) |
| CN102 | 1-695-480-21 | o | PIN, CONNECTOR (PC BOARD) 2P |
| CN201 | 1-764-243-31 | o | CONNECTOR (COAXIAL) |
| CN202 | 1-764-080-21 | o | PIN, CONNECTOR (PC BOARD) 8P |
| CP201 | ⚠ 1-417-611-11 | s | CONVERSION MODULE,E/O,EO-300 |
| CP401 | 1-417-612-11 | s | CONVERSION MODULE,O/E,OE-301 |
| D101 | 8-719-017-03 | s | DIODE 02DZ4.7-TPH3 |
| D102 | 8-719-017-03 | s | DIODE 02DZ4.7-TPH3 |
| D103 | 8-719-037-41 | s | DIODE RD20SB-T1 |
| D104 | 8-719-161-05 | s | DIODE RD8.2SB-T1 |
| D105 | 8-719-989-77 | s | DIODE SC802-04-TE12RA |
| D106 | 8-719-989-77 | s | DIODE SC802-04-TE12RA |
| D107 | 8-719-989-77 | s | DIODE SC802-04-TE12RA |
| D108 | 8-719-989-77 | s | DIODE SC802-04-TE12RA |
| D109 | 8-719-017-03 | s | DIODE 02DZ4.7-TPH3 |
| D110 | 8-719-017-03 | s | DIODE 02DZ4.7-TPH3 |
| D111 | 8-719-820-42 | s | DIODE 1SS302-TE85L |
| D112 | 8-719-036-91 | s | DIODE RD5.1SB-T1 |
| D113 | 8-719-036-91 | s | DIODE RD5.1SB-T1 |
| D114 | 8-719-820-42 | s | DIODE 1SS302-TE85L |
| E1 | 1-535-877-22 | s | CHIP, CHECKER |
| E2 | 1-535-877-22 | s | CHIP, CHECKER |
| FB101 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB102 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB103 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB104 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |

(SDI-84C BOARD (SUFFIX 13,14))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| FB105 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB106 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB201 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB202 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB203 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB204 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB205 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB206 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB207 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB208 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB209 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB210 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB211 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB212 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB213 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB402 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB403 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB404 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB405 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB406 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB407 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB408 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB409 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB410 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FL801 | 1-233-345-21 | s | FILTER, LOW PASS (5.5MHZ) |
| IC101 | 8-759-327-01 | s | IC NJM062V(TE2) |
| IC102 | 8-759-327-01 | s | IC NJM062V(TE2) |
| IC103 | 8-759-327-01 | s | IC NJM062V(TE2) |
| IC104 | 6-704-976-01 | s | IC ADR381ARTZ-REEL7 |
| IC105 | 6-706-482-01 | s | IC TC7SH00FU(T5RSOYJF) |
| IC106 | 6-701-572-01 | s | IC TPS54610PWPR |
| IC107 | 6-701-572-01 | s | IC TPS54610PWPR |
| IC109 | 8-759-359-49 | s | IC NJM3414AV(TE2) |
| IC110 | 6-706-482-01 | s | IC TC7SH00FU(T5RSOYJF) |
| IC111 | 8-759-327-01 | s | IC NJM062V(TE2) |
| IC112 | 8-759-338-95 | s | IC NJM2903V(TE2) |
| IC113 | 6-706-487-01 | s | IC TC7SH08FU(T5RSOYJF) |
| IC114 | 8-759-346-27 | s | IC LM45BIM3X |
| IC201 | 8-759-592-44 | s | IC TC7SZ04FU(TE85R) |
| IC202 | 8-759-472-43 | s | IC 74VHC245MTCX |
| IC204 | 8-759-363-26 | s | IC RN5VD28AA-TL-FA |
| IC205 | 6-706-487-01 | s | IC TC7SH08FU(T5RSOYJF) |
| IC206 | 6-706-487-01 | s | IC TC7SH08FU(T5RSOYJF) |
| IC208 | 6-703-693-01 | s | IC GS1532-CFE3 |
| IC209 | 6-702-535-01 | s | IC MC100LVEL11DTR2 |
| IC211 | 8-759-471-96 | s | IC 74VHC08MTCX |
| IC217 | 8-759-592-49 | s | IC TC7SZ125FU(TE85R) |
| IC218 | 8-759-592-44 | s | IC TC7SZ04FU(TE85R) |
| IC219 | 8-759-592-44 | s | IC TC7SZ04FU(TE85R) |
| IC220 | 8-759-592-44 | s | IC TC7SZ04FU(TE85R) |
| IC221 | 8-759-592-44 | s | IC TC7SZ04FU(TE85R) |
| IC401 | 6-706-487-01 | s | IC TC7SH08FU(T5RSOYJF) |
| IC403 | 6-709-052-01 | s | IC GS1561-CFE3 |
| IC404 | 8-759-592-49 | s | IC TC7SZ125FU(TE85R) |
| IC405 | 8-759-592-44 | s | IC TC7SZ04FU(TE85R) |
| IC407 | 8-759-472-43 | s | IC 74VHC245MTCX |
| IC409 | 8-759-592-42 | s | IC TC7SZ00FU(TE85R) |
| IC410 | 6-700-804-01 | s | IC SN74LVC574APWR |

(SDI-84C BOARD (SUFFIX 13,14))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| IC411 | 6-700-804-01 | s | IC SN74LVC574APWR |
| IC412 | 6-700-804-01 | s | IC SN74LVC574APWR |
| IC413 | 6-700-804-01 | s | IC SN74LVC574APWR |
| IC414 | 6-700-804-01 | s | IC SN74LVC574APWR |
| IC415 | 6-700-804-01 | s | IC SN74LVC574APWR |
| IC416 | 8-759-592-42 | s | IC TC7SZ00FU(TE85R) |
| IC417 | 8-759-592-42 | s | IC TC7SZ00FU(TE85R) |
| IC418 | 8-759-592-42 | s | IC TC7SZ00FU(TE85R) |
| IC703 | 6-706-482-01 | s | IC TC7SH00FU(T5RSOYJF) |
| IC801 | 8-752-371-56 | s | IC CXD1171M-TH |
| IC802 | 8-759-561-46 | s | IC AD8014ARTZ-REEL7 |
| L101 | 1-416-948-21 | s | COIL, CHOKE 10UH |
| L102 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L103 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L104 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L105 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L106 | 1-416-344-21 | s | COIL, CHOKE 10UH |
| L107 | 1-416-344-21 | s | COIL, CHOKE 10UH |
| L108 | 1-416-344-21 | s | COIL, CHOKE 10UH |
| L201 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L202 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L203 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L204 | 1-414-457-21 | s | INDUCTOR, CHIP (S) 3.3NH |
| L205 | 1-414-457-21 | s | INDUCTOR, CHIP (S) 3.3NH |
| L401 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L402 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L403 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L404 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L801 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L802 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L803 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L804 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| Q101 | 8-729-035-99 | s | TRANSISTOR 2SA1615-Z-E2 |
| Q102 | 8-729-927-99 | s | TRANSISTOR 2SC4617TL-QR |
| Q103 | 8-729-035-99 | s | TRANSISTOR 2SA1615-Z-E2 |
| Q104 | 8-729-927-99 | s | TRANSISTOR 2SC4617TL-QR |
| Q105 | 8-729-102-84 | s | TRANSISTOR 2SB624-T1BV5 |
| Q106 | 8-729-927-99 | s | TRANSISTOR 2SC4617TL-QR |
| Q107 | 8-729-927-99 | s | TRANSISTOR 2SC4617TL-QR |
| Q108 | 8-729-209-77 | s | TRANSISTOR 2SC2873Y-TE12L |
| Q109 | 8-729-928-82 | s | TRANSISTOR DTC144EE-TL |
| Q110 | 8-729-041-23 | s | TRANSISTOR NDS356AP |
| Q111 | 8-729-928-19 | s | TRANSISTOR 2SA1774TL-QR |
| Q112 | 8-729-927-99 | s | TRANSISTOR 2SC4617TL-QR |
| Q113 | 8-729-928-37 | s | TRANSISTOR DTA114EE-TL |
| Q114 | 8-729-928-37 | s | TRANSISTOR DTA114EE-TL |
| Q115 | 8-729-928-82 | s | TRANSISTOR DTC144EE-TL |
| Q116 | 8-729-928-19 | s | TRANSISTOR 2SA1774TL-QR |
| Q117 | 8-729-927-99 | s | TRANSISTOR 2SC4617TL-QR |
| Q118 | 8-729-928-82 | s | TRANSISTOR DTC144EE-TL |
| Q119 | 8-729-928-82 | s | TRANSISTOR DTC144EE-TL |
| Q120 | 8-729-927-99 | s | TRANSISTOR 2SC4617TL-QR |
| Q201 | 8-729-927-99 | s | TRANSISTOR 2SC4617TL-QR |
| Q202 | 8-729-928-28 | s | TRANSISTOR DTA144EE-TL |
| Q203 | 8-729-928-82 | s | TRANSISTOR DTC144EE-TL |
| Q204 | 8-729-041-23 | s | TRANSISTOR NDS356AP |
| Q205 | 8-729-041-23 | s | TRANSISTOR NDS356AP |

(SDI-84C BOARD (SUFFIX 13,14))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| Q401 | 8-729-928-82 | s | TRANSISTOR DTC144EE-TL |
| Q402 | 8-729-928-28 | s | TRANSISTOR DTA144EE-TL |
| Q403 | 8-729-928-82 | s | TRANSISTOR DTC144EE-TL |
| Q404 | 8-729-928-28 | s | TRANSISTOR DTA144EE-TL |
| Q406 | 8-729-041-23 | s | TRANSISTOR NDS356AP |
| Q409 | 8-729-041-23 | s | TRANSISTOR NDS356AP |
| Q412 | 8-729-041-23 | s | TRANSISTOR NDS356AP |
| R101 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R102 | 1-218-945-11 | s | RES, CHIP 220 (1005) |
| R103 | 1-218-945-11 | s | RES, CHIP 220 (1005) |
| R104 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R105 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R106 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R107 | 1-218-945-11 | s | RES, CHIP 220 (1005) |
| R108 | 1-208-691-11 | s | RES, CHIP 2.2K (1005) |
| R109 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R110 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R111 | 1-208-715-11 | s | RES, CHIP 22K (1005) |
| R112 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R113 | 1-208-703-11 | s | RES, CHIP 6.8K (1005) |
| R114 | 1-218-945-11 | s | RES, CHIP 220 (1005) |
| R115 | 1-218-945-11 | s | RES, CHIP 220 (1005) |
| R116 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R117 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R118 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R119 | 1-208-931-81 | s | RES, CHIP 68K (1005) |
| R120 | 1-208-931-81 | s | RES, CHIP 68K (1005) |
| R121 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R122 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R123 | 1-216-833-91 | s | RES, CHIP 10K (1608) |
| R124 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R125 | 1-216-833-91 | s | RES, CHIP 10K (1608) |
| R126 | 1-216-833-91 | s | RES, CHIP 10K (1608) |
| R127 | 1-216-833-91 | s | RES, CHIP 10K (1608) |
| R128 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R129 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R130 | 1-218-945-11 | s | RES, CHIP 220 (1005) |
| R131 | 1-218-945-11 | s | RES, CHIP 220 (1005) |
| R132 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R133 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R134 | 1-208-699-11 | s | RES, CHIP 4.7K (1005) |
| R135 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R136 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R137 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R138 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R139 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R141 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R142 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R143 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R144 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R145 | 1-208-891-81 | s | RES, CHIP 1.5K (1005) |
| R146 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R147 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R148 | 1-208-703-11 | s | RES, CHIP 6.8K (1005) |
| R149 | 1-208-703-11 | s | RES, CHIP 6.8K (1005) |
| R150 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R151 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R152 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |

(SDI-84C BOARD (SUFFIX 13,14))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R153 | 1-218-945-11 | s | RES, CHIP 220 (1005) |
| R154 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R155 | 1-208-891-81 | s | RES, CHIP 1.5K (1005) |
| R156 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R157 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R158 | 1-208-703-11 | s | RES, CHIP 6.8K (1005) |
| R159 | 1-208-891-81 | s | RES, CHIP 1.5K (1005) |
| R160 | 1-208-891-81 | s | RES, CHIP 1.5K (1005) |
| R164 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R165 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R166 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R167 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R168 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R169 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R170 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R171 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R172 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R173 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R174 | 1-208-695-11 | s | RES, CHIP 3.3K (1005) |
| R175 | 1-208-695-11 | s | RES, CHIP 3.3K (1005) |
| R176 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R177 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R178 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R179 | 1-208-703-11 | s | RES, CHIP 6.8K (1005) |
| R180 | 1-208-703-11 | s | RES, CHIP 6.8K (1005) |
| R181 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R182 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R183 | 1-208-715-11 | s | RES, CHIP 22K (1005) |
| R184 | 1-208-715-11 | s | RES, CHIP 22K (1005) |
| R185 | 1-208-715-11 | s | RES, CHIP 22K (1005) |
| R186 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R187 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R188 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R189 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R190 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R191 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R192 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R193 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R194 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R195 | 1-208-867-81 | s | RES, CHIP 150 (1005) |
| R197 | 1-208-691-11 | s | RES, CHIP 2.2K (1005) |
| R201 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R202 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R203 | 1-208-635-11 | s | RES, CHIP 10 (1005) |
| R204 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R205 | 1-208-635-11 | s | RES, CHIP 10 (1005) |
| R206 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R207 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R208 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R209 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R210 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R211 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R213 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R214 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R216 | 1-208-635-11 | s | RES, CHIP 10 (1005) |
| R218 | 1-208-635-11 | s | RES, CHIP 10 (1005) |
| R220 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R221 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R222 | 1-218-941-11 | s | RES, CHIP 100 (1005) |

(SDI-84C BOARD (SUFFIX 13,14))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R224 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R225 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R226 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R227 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R228 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R229 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R235 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R237 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R238 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R239 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R240 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R241 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R242 | 1-208-635-11 | s | RES, CHIP 10 (1005) |
| R243 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R244 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R245 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R246 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R247 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R248 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R249 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R250 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R252 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R253 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R254 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R255 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R256 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R257 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R258 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R259 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R260 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R261 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R262 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R263 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R264 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R265 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R266 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R267 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R268 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R269 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R270 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R271 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R273 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R277 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R279 | 1-208-711-11 | s | RES, CHIP 15K (1005) |
| R281 | 1-208-635-11 | s | RES, CHIP 10 (1005) |
| R282 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R284 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R285 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R286 | 1-218-945-11 | s | RES, CHIP 220 (1005) |
| R287 | 1-218-939-11 | s | RES, CHIP 68 (1005) |
| R288 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R289 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R290 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R291 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R292 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R294 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R295 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R296 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R297 | 1-208-856-81 | s | RES, CHIP 51 (1005) |

(SDI-84C BOARD (SUFFIX 13,14))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R298 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R299 | 1-218-945-11 | s | RES, CHIP 220 (1005) |
| R300 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R301 | 1-208-699-11 | s | RES, CHIP 4.7K (1005) |
| R302 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R303 | 1-208-695-11 | s | RES, CHIP 3.3K (1005) |
| R304 | 1-218-945-11 | s | RES, CHIP 220 (1005) |
| R305 | 1-218-945-11 | s | RES, CHIP 220 (1005) |
| R306 | 1-218-945-11 | s | RES, CHIP 220 (1005) |
| R307 | 1-218-945-11 | s | RES, CHIP 220 (1005) |
| R308 | 1-208-699-11 | s | RES, CHIP 4.7K (1005) |
| R309 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R310 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R311 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R312 | 1-220-882-81 | s | RES, CHIP 33 (1005) |
| R313 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R314 | 1-208-860-81 | s | RES, CHIP 75 (1005) |
| R315 | 1-208-860-81 | s | RES, CHIP 75 (1005) |
| R316 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R317 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R318 | 1-208-860-81 | s | RES, CHIP 75 (1005) |
| R320 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R322 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R323 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R324 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R325 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R349 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R350 | 1-208-691-11 | s | RES, CHIP 2.2K (1005) |
| R352 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R353 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R354 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R355 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R356 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R357 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R358 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R359 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R401 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R402 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R404 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R414 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R422 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R427 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R429 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R430 | 1-208-699-11 | s | RES, CHIP 4.7K (1005) |
| R431 | 1-208-699-11 | s | RES, CHIP 4.7K (1005) |
| R432 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R433 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R434 | 1-208-703-11 | s | RES, CHIP 6.8K (1005) |
| R436 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R437 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R438 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R440 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R441 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R442 | 1-208-635-11 | s | RES, CHIP 10 (1005) |
| R443 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R444 | 1-208-691-11 | s | RES, CHIP 2.2K (1005) |
| R445 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R446 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R449 | 1-208-635-11 | s | RES, CHIP 10 (1005) |

(SDI-84C BOARD (SUFFIX 13,14))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R451 | 1-208-635-11 | s | RES, CHIP 10 (1005) |
| R453 | 1-208-635-11 | s | RES, CHIP 10 (1005) |
| R456 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R457 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R458 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R459 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R463 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R464 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R466 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R467 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R469 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R471 | 1-208-691-11 | s | RES, CHIP 2.2K (1005) |
| R473 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R474 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R475 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R476 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R477 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R478 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R479 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R480 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R481 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R482 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R483 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R484 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R485 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R486 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R487 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R488 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R489 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R490 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R491 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R494 | 1-208-635-11 | s | RES, CHIP 10 (1005) |
| R495 | 1-208-635-11 | s | RES, CHIP 10 (1005) |
| R496 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R497 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R500 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R501 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R502 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R801 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R803 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R804 | 1-208-699-11 | s | RES, CHIP 4.7K (1005) |
| R805 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R806 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R807 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R808 | 1-208-715-11 | s | RES, CHIP 22K (1005) |
| R809 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R810 | 1-208-715-11 | s | RES, CHIP 22K (1005) |
| R811 | 1-208-875-81 | s | RES, CHIP 330 (1005) |
| R812 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R814 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R815 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R816 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R817 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R818 | 1-208-703-11 | s | RES, CHIP 6.8K (1005) |
| R819 | 1-208-867-81 | s | RES, CHIP 150 (1005) |
| R820 | 1-218-945-11 | s | RES, CHIP 220 (1005) |
| R821 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R822 | 1-208-691-11 | s | RES, CHIP 2.2K (1005) |
| R823 | 1-208-635-11 | s | RES, CHIP 10 (1005) |

(SDI-84C BOARD (SUFFIX 13,14))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R824 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R825 | 1-208-867-81 | s | RES, CHIP 150 (1005) |
| R826 | 1-208-867-81 | s | RES, CHIP 150 (1005) |
| RB201 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB202 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB203 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB204 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB205 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB206 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB207 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB208 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB209 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB210 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB211 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB212 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB213 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB214 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB215 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB216 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB222 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB223 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB224 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB225 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB226 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB227 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB228 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB401 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB402 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB403 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB404 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB405 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB406 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB407 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB413 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB414 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB415 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB416 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB417 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB418 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB419 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB420 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB421 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB422 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB423 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB424 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB425 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB801 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB802 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| S201 | 1-692-271-41 | s | SWITCH, SLIDE |
| S202 | 1-771-721-21 | s | SWITCH, TACTILE |
| TP203 | 1-535-877-22 | s | CHIP, CHECKER |
| TP401 | 1-535-877-22 | s | CHIP, CHECKER |
| TP801 | 1-535-877-22 | s | CHIP, CHECKER |
| X201 | 1-795-872-11 | s | OSCILLATOR |
| X401 | 1-795-872-11 | s | OSCILLATOR |

SDI-84/84C BOARD (SUFFIX 15)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| 1pc | A-1099-252-B | s | MOUNTED CIRCUIT BOARD, SDI-84 (For HDC1000/1100/1500/1600) |
| 1pc | A-1179-311-B | s | MOUNTED CIRCUIT BOARD, SDI-84C (For HDC1400/1580) |
| C101 | 1-100-620-91 | s | CAP, CHIP CERAMIC 47MF B(3225) |
| C104 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C107 | 1-165-872-21 | s | CAP, ELECT 47MF (5.0X6.5) |
| C109 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C115 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C116 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C119 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C120 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C122 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C123 | 1-100-620-91 | s | CAP, CHIP CERAMIC 47MF B(3225) |
| C124 | 1-100-620-91 | s | CAP, CHIP CERAMIC 47MF B(3225) |
| C125 | 1-126-400-21 | s | CAP, CHIP ELECT 22MF(6.3X5.7) |
| C126 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C127 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C130 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C132 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C133 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C134 | 1-100-620-91 | s | CAP, CHIP CERAMIC 47MF B(3225) |
| C135 | 1-100-620-91 | s | CAP, CHIP CERAMIC 47MF B(3225) |
| C136 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C137 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C138 | 1-119-923-81 | s | CAP, CERAMIC 0.047MF B 1005 |
| C141 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C142 | 1-119-923-81 | s | CAP, CERAMIC 0.047MF B 1005 |
| C143 | 1-100-620-91 | s | CAP, CHIP CERAMIC 47MF B(3225) |
| C144 | 1-100-620-91 | s | CAP, CHIP CERAMIC 47MF B(3225) |
| C145 | 1-107-819-81 | s | CAP,CHIP CERAMIC 22000PF B1005 |
| C146 | 1-164-936-81 | s | CAP, CHIP CERAMIC 680PF B 1005 |
| C147 | 1-100-620-91 | s | CAP, CHIP CERAMIC 47MF B(3225) |
| C148 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C149 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C150 | 1-100-620-91 | s | CAP, CHIP CERAMIC 47MF B(3225) |
| C151 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C152 | 1-119-923-81 | s | CAP, CERAMIC 0.047MF B 1005 |
| C155 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C156 | 1-119-923-81 | s | CAP, CERAMIC 0.047MF B 1005 |
| C157 | 1-100-620-91 | s | CAP, CHIP CERAMIC 47MF B(3225) |
| C158 | 1-100-620-91 | s | CAP, CHIP CERAMIC 47MF B(3225) |
| C159 | 1-107-819-81 | s | CAP,CHIP CERAMIC 22000PF B1005 |
| C160 | 1-164-936-81 | s | CAP, CHIP CERAMIC 680PF B 1005 |
| C161 | 1-100-620-91 | s | CAP, CHIP CERAMIC 47MF B(3225) |
| C162 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C164 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C165 | 1-100-620-91 | s | CAP, CHIP CERAMIC 47MF B(3225) |
| C166 | 1-128-414-21 | s | CAP, CHIP ELECT 220MF |
| C167 | 1-164-874-81 | s | CAP,CHIP CERAMIC 100PF CH 1005 |
| C168 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C169 | 1-128-414-21 | s | CAP, CHIP ELECT 220MF |
| C170 | 1-164-874-81 | s | CAP,CHIP CERAMIC 100PF CH 1005 |
| C171 | 1-164-850-81 | s | CAP, CHIP CERAMIC 10PF CH 1005 |
| C172 | 1-164-874-81 | s | CAP,CHIP CERAMIC 100PF CH 1005 |
| C173 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C174 | 1-165-872-21 | s | CAP, ELECT 47MF (5.0X6.5) |
| C175 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C176 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |

(SDI-84/84C BOARD (SUFFIX 15))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C177 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C178 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C179 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C180 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C203 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C204 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C205 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C206 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C208 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C209 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C210 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C211 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C212 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C213 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C214 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C215 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C216 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C218 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C219 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C220 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C221 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C222 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C223 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C224 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C225 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C226 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C227 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C228 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C229 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C230 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C231 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C232 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C233 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C234 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C235 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C236 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C237 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C238 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C239 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C240 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C243 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C244 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C245 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C246 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C247 | 1-119-923-81 | s | CAP, CERAMIC 0.047MF B 1005 |
| C248 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C249 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C250 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C251 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C252 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C253 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C254 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C255 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C256 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C257 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C258 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C259 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C260 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C261 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |

(SDI-84/84C BOARD (SUFFIX 15))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C262 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C263 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C264 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C265 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C266 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C267 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C268 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C269 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C270 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C271 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C272 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C273 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C274 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C275 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C289 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C401 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C403 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C407 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C410 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C414 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C417 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| C418 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| C420 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C421 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C422 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C423 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C424 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C425 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C426 | 1-164-939-81 | s | CAP, CHIPCERAMIC 2200PF B 1005 |
| C427 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C428 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C429 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C430 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C431 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C432 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C433 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C436 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C438 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C439 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C441 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C443 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C444 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C445 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C446 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C447 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C448 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C449 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C450 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C451 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C452 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C453 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C454 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C455 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C456 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C457 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C458 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C459 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C460 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C461 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |

(SDI-84/84C BOARD (SUFFIX 15))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C462 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C463 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C464 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C465 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C466 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C467 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C468 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C469 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C470 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C471 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C472 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C473 | 1-164-850-81 | s | CAP, CHIP CERAMIC 10PF CH 1005 |
| C474 | 1-164-850-81 | s | CAP, CHIP CERAMIC 10PF CH 1005 |
| C475 | 1-125-891-91 | s | CAP, CHIP CERAMIC0.47MF B 1608 |
| C476 | 1-125-891-91 | s | CAP, CHIP CERAMIC0.47MF B 1608 |
| C477 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C478 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C602 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C603 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C604 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C605 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C606 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C607 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C608 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C609 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C610 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C611 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C612 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C613 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C614 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C617 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C618 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C619 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C620 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C621 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C625 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C626 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C627 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C628 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C629 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C630 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C631 | 1-164-939-81 | s | CAP, CHIPCERAMIC 2200PF B 1005 |
| C632 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C633 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C634 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C635 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C636 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C637 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C638 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C639 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C640 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C641 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C642 | 1-125-891-91 | s | CAP, CHIP CERAMIC0.47MF B 1608 |
| C644 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C701 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C702 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C703 | 1-164-858-81 | s | CAP, CHIP CERAMIC 22PF CH 1005 |
| C704 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C707 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |

(SDI-84/84C BOARD (SUFFIX 15))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C710 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C711 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C712 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C713 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C714 | 1-100-620-91 | s | CAP, CHIP CERAMIC 47MF B(3225) |
| C715 | 1-100-620-91 | s | CAP, CHIP CERAMIC 47MF B(3225) |
| C716 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C717 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C718 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C719 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C721 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C723 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C724 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C725 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C726 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C727 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C728 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C802 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C803 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C804 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C805 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C806 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C807 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C808 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C809 | 1-100-620-91 | s | CAP, CHIP CERAMIC 47MF B(3225) |
| C810 | 1-164-850-81 | s | CAP, CHIP CERAMIC 10PF CH 1005 |
| C812 | 1-164-866-81 | s | CAP, CHIP CERAMIC 47PF CH 1005 |
| C813 | 1-100-620-91 | s | CAP, CHIP CERAMIC 47MF B(3225) |
| C814 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C815 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C816 | 1-100-620-91 | s | CAP, CHIP CERAMIC 47MF B(3225) |
| C852 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C853 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C854 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C855 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C856 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C857 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C858 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C859 | 1-100-620-91 | s | CAP, CHIP CERAMIC 47MF B(3225) |
| C860 | 1-164-850-81 | s | CAP, CHIP CERAMIC 10PF CH 1005 |
| C862 | 1-164-866-81 | s | CAP, CHIP CERAMIC 47PF CH 1005 |
| C863 | 1-100-620-91 | s | CAP, CHIP CERAMIC 47MF B(3225) |
| C864 | 1-100-620-91 | s | CAP, CHIP CERAMIC 47MF B(3225) |
| C865 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C866 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C903 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C904 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C905 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C906 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C907 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C908 | 1-119-923-81 | s | CAP, CERAMIC 0.047MF B 1005 |
| C909 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C910 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C911 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C912 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C913 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C914 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C915 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C916 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |

(SDI-84/84C BOARD (SUFFIX 15))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C917 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C918 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C919 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C920 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C921 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C927 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| C928 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| C929 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C930 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C932 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C933 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C934 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C935 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C936 | 1-100-507-91 | s | CAP, CERAMIC 4.7MF C (1608) |
| C937 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C938 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C939 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C940 | 1-125-891-91 | s | CAP, CHIP CERAMIC0.47MF B 1608 |
| CN102 | 1-695-480-21 | o | PIN, CONNECTOR (PC BOARD) 2P |
| CN201 | 1-764-243-31 | o | CONNECTOR (COAXIAL) |
| CN202 | 1-764-080-21 | o | PIN, CONNECTOR (PC BOARD) 8P |
| CN601 | 1-764-243-31 | o | CONNECTOR (COAXIAL) |
| CN851 | 1-764-243-31 | o | CONNECTOR (COAXIAL) |
| CP201 | ⚠ 1-417-611-12 | s | CONVERSION MODULE,E/O,EO-300 |
| CP401 | 1-417-612-21 | s | CONVERSION MODULE,O/E,OE-301 |
| D101 | 8-719-017-03 | s | DIODE 02DZ4.7-TPH3 |
| D102 | 8-719-017-03 | s | DIODE 02DZ4.7-TPH3 |
| D103 | 8-719-037-41 | s | DIODE RD20SB-T1 |
| D104 | 8-719-161-05 | s | DIODE RD8.2SB-T1 |
| D105 | 8-719-989-77 | s | DIODE SC802-04-TE12RA |
| D106 | 8-719-989-77 | s | DIODE SC802-04-TE12RA |
| D107 | 8-719-989-77 | s | DIODE SC802-04-TE12RA |
| D108 | 8-719-989-77 | s | DIODE SC802-04-TE12RA |
| D109 | 8-719-017-03 | s | DIODE 02DZ4.7-TPH3 |
| D110 | 8-719-017-03 | s | DIODE 02DZ4.7-TPH3 |
| D112 | 8-719-036-91 | s | DIODE RD5.1SB-T1 |
| D113 | 8-719-036-91 | s | DIODE RD5.1SB-T1 |
| D114 | 8-719-820-42 | s | DIODE 1SS302-TE85L |
| D701 | 8-719-821-08 | s | DIODE 1SS271-TE85L |
| D702 | 8-719-820-42 | s | DIODE 1SS302-TE85L |
| E1 | 1-535-877-22 | s | CHIP, CHECKER |
| E2 | 1-535-877-22 | s | CHIP, CHECKER |
| FB101 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB102 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB103 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB104 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB105 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB106 | 1-469-094-21 | s | FERRITE, EMI (SMD) (1608) |
| FB201 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB202 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB203 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB204 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB205 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB206 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB207 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB208 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB210 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |

(SDI-84/84C BOARD (SUFFIX 15))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| FB211 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB212 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB213 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB402 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB403 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB404 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB406 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB407 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB408 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB409 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB410 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB601 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB602 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB603 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB604 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB605 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB607 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB608 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB609 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB610 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB611 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB901 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB902 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB903 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB904 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB905 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB906 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB907 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB908 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB910 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB912 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FB913 | 1-414-554-21 | s | FERRITE, EMI (SMD) (1608) |
| FL801 | 1-233-345-21 | s | FILTER, LOW PASS (5.5MHZ) |
| FL851 | 1-233-345-21 | s | FILTER, LOW PASS (5.5MHZ) |
| IC101 | 8-759-327-01 | s | IC NJM062V(TE2) |
| IC102 | 8-759-327-01 | s | IC NJM062V(TE2) |
| IC103 | 8-759-327-01 | s | IC NJM062V(TE2) |
| IC104 | 6-704-976-01 | s | IC ADR381ARTZ-REEL7 |
| IC105 | 6-706-482-01 | s | IC TC7SH00FU(T5RSOYJF) |
| IC106 | 6-701-572-01 | s | IC TPS54610PWPR |
| IC107 | 6-701-572-01 | s | IC TPS54610PWPR |
| IC109 | 8-759-359-49 | s | IC NJM3414AV(TE2) |
| IC110 | 6-706-482-01 | s | IC TC7SH00FU(T5RSOYJF) |
| IC111 | 8-759-327-01 | s | IC NJM062V(TE2) |
| IC112 | 8-759-338-95 | s | IC NJM2903V(TE2) |
| IC113 | 6-706-487-01 | s | IC TC7SH08FU(T5RSOYJF) |
| IC114 | 8-759-346-27 | s | IC LM45BIM3X |
| IC201 | 8-759-592-44 | s | IC TC7SZ04FU(TE85R) |
| IC202 | 8-759-472-43 | s | IC 74VHC245MTCX |
| IC204 | 8-759-363-26 | s | IC RN5VD28AA-TL-FA |
| IC205 | 6-706-487-01 | s | IC TC7SH08FU(T5RSOYJF) |
| IC206 | 6-706-487-01 | s | IC TC7SH08FU(T5RSOYJF) |
| IC208 | 6-708-741-01 | s | IC GS1531-CBE2 |
| IC209 | 6-702-535-01 | s | IC MC100LVEL11DTR2 |
| IC210 | 6-709-619-01 | s | IC GS1578ACNE3 |
| IC211 | 8-759-471-96 | s | IC 74VHC08MTCX |
| IC217 | 8-759-592-49 | s | IC TC7SZ125FU(TE85R) |
| IC218 | 8-759-592-44 | s | IC TC7SZ04FU(TE85R) |

(SDI-84/84C BOARD (SUFFIX 15))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| IC219 | 8-759-592-44 | s | IC TC7SZ04FU(TE85R) |
| IC220 | 8-759-592-44 | s | IC TC7SZ04FU(TE85R) |
| IC221 | 8-759-592-44 | s | IC TC7SZ04FU(TE85R) |
| IC401 | 6-706-487-01 | s | IC TC7SH08FU(T5RSOYJF) |
| IC403 | 6-708-295-01 | s | IC GS-1559-CBE2 |
| IC404 | 8-759-592-49 | s | IC TC7SZ125FU(TE85R) |
| IC405 | 8-759-592-44 | s | IC TC7SZ04FU(TE85R) |
| IC407 | 8-759-472-43 | s | IC 74VHC245MTCX |
| IC409 | 8-759-592-42 | s | IC TC7SZ00FU(TE85R) |
| IC410 | 6-700-804-01 | s | IC SN74LVC574APWR |
| IC411 | 6-700-804-01 | s | IC SN74LVC574APWR |
| IC412 | 6-700-804-01 | s | IC SN74LVC574APWR |
| IC413 | 6-700-804-01 | s | IC SN74LVC574APWR |
| IC414 | 6-700-804-01 | s | IC SN74LVC574APWR |
| IC415 | 6-700-804-01 | s | IC SN74LVC574APWR |
| IC416 | 8-759-592-42 | s | IC TC7SZ00FU(TE85R) |
| IC417 | 8-759-592-42 | s | IC TC7SZ00FU(TE85R) |
| IC418 | 8-759-592-42 | s | IC TC7SZ00FU(TE85R) |
| IC602 | 8-759-592-49 | s | IC TC7SZ125FU(TE85R) |
| IC604 | 6-706-482-01 | s | IC TC7SH00FU(T5RSOYJF) |
| IC606 | 8-759-592-49 | s | IC TC7SZ125FU(TE85R) |
| IC701 | 6-706-482-01 | s | IC TC7SH00FU(T5RSOYJF) |
| IC702 | 8-759-327-01 | s | IC NJM062V(TE2) |
| IC703 | 6-706-482-01 | s | IC TC7SH00FU(T5RSOYJF) |
| IC704 | 6-708-506-01 | s | IC ML86V7666TBZ03A |
| IC801 | 8-752-371-56 | s | IC CXD1171M-TH |
| IC802 | 8-759-561-46 | s | IC AD8014ARTZ-REEL7 |
| IC851 | 8-752-371-56 | s | IC CXD1171M-TH |
| IC852 | 8-759-561-46 | s | IC AD8014ARTZ-REEL7 |
| IC904 | 8-759-592-49 | s | IC TC7SZ125FU(TE85R) |
| IC905 | 8-759-592-49 | s | IC TC7SZ125FU(TE85R) |
| L101 | 1-457-205-21 | s | COIL, CHOKE (SMD) 3.3UH |
| L102 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L103 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L104 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L105 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L106 | 1-416-344-21 | s | COIL, CHOKE 10UH |
| L107 | 1-416-344-21 | s | COIL, CHOKE 10UH |
| L108 | 1-416-344-21 | s | COIL, CHOKE 10UH |
| L201 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L202 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L203 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L204 | 1-414-457-21 | s | INDUCTOR, CHIP (S) 3.3NH |
| L205 | 1-414-457-21 | s | INDUCTOR, CHIP (S) 3.3NH |
| L401 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L402 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L403 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L404 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L601 | 1-414-461-41 | s | INDUCTOR, CHIP (K) 6.8NH |
| L602 | 1-414-461-41 | s | INDUCTOR, CHIP (K) 6.8NH |
| L604 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L605 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L703 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L704 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L706 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L707 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L801 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L802 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |

(SDI-84/84C BOARD (SUFFIX 15))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| L803 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L804 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L851 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L852 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L853 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L854 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L902 | 1-414-457-21 | s | INDUCTOR, CHIP (S) 3.3NH |
| L903 | 1-414-457-21 | s | INDUCTOR, CHIP (S) 3.3NH |
| Q101 | 8-729-035-99 | s | TRANSISTOR 2SA1615-Z-E2 |
| Q102 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q103 | 8-729-035-99 | s | TRANSISTOR 2SA1615-Z-E2 |
| Q104 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q105 | 8-729-102-84 | s | TRANSISTOR 2SB624-T1BV5 |
| Q106 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q107 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q108 | 8-729-209-77 | s | TRANSISTOR 2SC2873Y-TE12L |
| Q109 | 8-729-928-82 | s | TRANSISTOR DTC144EE-TL |
| Q110 | 8-729-041-23 | s | TRANSISTOR NDS356AP |
| Q111 | 8-729-928-25 | s | TRANSISTOR 2SA1774TL-QR |
| Q112 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q113 | 8-729-928-37 | s | TRANSISTOR DTA114EE-TL |
| Q114 | 8-729-928-37 | s | TRANSISTOR DTA114EE-TL |
| Q115 | 8-729-928-82 | s | TRANSISTOR DTC144EE-TL |
| Q116 | 8-729-928-25 | s | TRANSISTOR 2SA1774TL-QR |
| Q117 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q118 | 8-729-928-82 | s | TRANSISTOR DTC144EE-TL |
| Q119 | 8-729-928-82 | s | TRANSISTOR DTC144EE-TL |
| Q120 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q201 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q202 | 8-729-928-28 | s | TRANSISTOR DTA144EE-TL |
| Q203 | 8-729-928-82 | s | TRANSISTOR DTC144EE-TL |
| Q204 | 8-729-041-23 | s | TRANSISTOR NDS356AP |
| Q205 | 8-729-041-23 | s | TRANSISTOR NDS356AP |
| Q401 | 8-729-928-82 | s | TRANSISTOR DTC144EE-TL |
| Q402 | 8-729-928-28 | s | TRANSISTOR DTA144EE-TL |
| Q403 | 8-729-928-82 | s | TRANSISTOR DTC144EE-TL |
| Q404 | 8-729-928-28 | s | TRANSISTOR DTA144EE-TL |
| Q406 | 8-729-041-23 | s | TRANSISTOR NDS356AP |
| Q409 | 8-729-041-23 | s | TRANSISTOR NDS356AP |
| Q412 | 8-729-041-23 | s | TRANSISTOR NDS356AP |
| Q601 | 8-729-046-30 | s | TRANSISTOR 2SC5245-4/5-TL-E |
| Q603 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q604 | 8-729-928-25 | s | TRANSISTOR 2SA1774TL-QR |
| Q606 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q607 | 8-729-928-28 | s | TRANSISTOR DTA144EE-TL |
| Q608 | 8-729-928-82 | s | TRANSISTOR DTC144EE-TL |
| Q610 | 8-729-928-28 | s | TRANSISTOR DTA144EE-TL |
| Q611 | 8-729-928-82 | s | TRANSISTOR DTC144EE-TL |
| Q905 | 8-729-928-28 | s | TRANSISTOR DTA144EE-TL |
| Q906 | 8-729-928-82 | s | TRANSISTOR DTC144EE-TL |
| R101 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R102 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R103 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R104 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R105 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R106 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R107 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R108 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |

(SDI-84/84C BOARD (SUFFIX 15))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R109 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R110 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R111 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R112 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R113 | 1-208-907-81 | s | RES, CHIP 6.8K (1005) |
| R114 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R115 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R116 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R117 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R118 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R119 | 1-208-931-81 | s | RES, CHIP 68K (1005) |
| R120 | 1-208-931-81 | s | RES, CHIP 68K (1005) |
| R121 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R122 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R123 | 1-216-833-91 | s | RES, CHIP 10K (1608) |
| R124 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R125 | 1-216-833-91 | s | RES, CHIP 10K (1608) |
| R126 | 1-216-833-91 | s | RES, CHIP 10K (1608) |
| R127 | 1-216-833-91 | s | RES, CHIP 10K (1608) |
| R128 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R129 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R130 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R131 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R132 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R133 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R134 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R135 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R136 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R137 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R138 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R139 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R141 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R142 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R143 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R144 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R145 | 1-208-891-81 | s | RES, CHIP 1.5K (1005) |
| R146 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R147 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R148 | 1-208-907-81 | s | RES, CHIP 6.8K (1005) |
| R149 | 1-208-907-81 | s | RES, CHIP 6.8K (1005) |
| R150 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R151 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R152 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R153 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R154 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R155 | 1-208-891-81 | s | RES, CHIP 1.5K (1005) |
| R156 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R157 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R158 | 1-208-907-81 | s | RES, CHIP 6.8K (1005) |
| R159 | 1-208-891-81 | s | RES, CHIP 1.5K (1005) |
| R160 | 1-208-891-81 | s | RES, CHIP 1.5K (1005) |
| R164 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R165 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R166 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R167 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R168 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R169 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R170 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R171 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |

(SDI-84/84C BOARD (SUFFIX 15))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R172 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R173 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R174 | 1-208-899-81 | s | RES, CHIP 3.3K (1005) |
| R175 | 1-208-899-81 | s | RES, CHIP 3.3K (1005) |
| R176 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R177 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R178 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R179 | 1-208-907-81 | s | RES, CHIP 6.8K (1005) |
| R180 | 1-208-907-81 | s | RES, CHIP 6.8K (1005) |
| R181 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R182 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R183 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R184 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R185 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R186 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R187 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R188 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R189 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R190 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R191 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R192 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R193 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R194 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R195 | 1-208-867-81 | s | RES, CHIP 150 (1005) |
| R196 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R197 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R198 | 1-242-967-81 | s | RES, CHIP 1.0 (1005) |
| R199 | 1-242-967-81 | s | RES, CHIP 1.0 (1005) |
| R201 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R202 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R203 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R204 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R205 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R206 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R207 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R208 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R209 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R210 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R211 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R213 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R214 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R216 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R218 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R220 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R221 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R222 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R224 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R225 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R226 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R227 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R228 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R229 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R235 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R237 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R238 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R239 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R240 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R241 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R242 | 1-220-870-81 | s | RES, CHIP 10 (1005) |

(SDI-84/84C BOARD (SUFFIX 15))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R243 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R244 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R245 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R246 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R247 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R248 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R249 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R250 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R252 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R253 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R254 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R255 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R256 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R257 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R258 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R259 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R260 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R261 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R262 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R263 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R264 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R265 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R266 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R267 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R268 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R269 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R270 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R271 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R273 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R277 | 1-220-882-81 | s | RES, CHIP 33 (1005) |
| R279 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R281 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R282 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R284 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R285 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R286 | 1-208-867-81 | s | RES, CHIP 150 (1005) |
| R287 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R288 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R289 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R290 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R291 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R292 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R294 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R295 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R296 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R297 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R298 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R299 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R300 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R301 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R302 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R303 | 1-208-899-81 | s | RES, CHIP 3.3K (1005) |
| R304 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R305 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R306 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R307 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R308 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R309 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R310 | 1-208-856-81 | s | RES, CHIP 51 (1005) |

(SDI-84/84C BOARD (SUFFIX 15))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R311 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R312 | 1-220-882-81 | s | RES, CHIP 33 (1005) |
| R313 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R314 | 1-208-860-81 | s | RES, CHIP 75 (1005) |
| R315 | 1-208-860-81 | s | RES, CHIP 75 (1005) |
| R316 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R317 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R318 | 1-208-860-81 | s | RES, CHIP 75 (1005) |
| R320 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R322 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R323 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R324 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R325 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R349 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R350 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R352 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R353 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R354 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R355 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R356 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R357 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R358 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R359 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R401 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R402 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R404 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R414 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R422 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R427 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R430 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R431 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R432 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R433 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R434 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R435 | 1-208-943-81 | s | RES, CHIP 220K (1005) |
| R436 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R437 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R438 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R440 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R441 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R442 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R443 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R444 | 1-208-875-81 | s | RES, CHIP 330 (1005) |
| R445 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R446 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R448 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R449 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R451 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R453 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R456 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R457 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R458 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R459 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R463 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R464 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R466 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R467 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R469 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R471 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |

(SDI-84/84C BOARD (SUFFIX 15))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R473 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R474 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R475 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R476 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R477 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R478 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R479 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R480 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R481 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R482 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R483 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R484 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R485 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R486 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R487 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R488 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R489 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R490 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R491 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R494 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R495 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R496 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R497 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R500 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R501 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R601 | 1-208-860-81 | s | RES, CHIP 75 (1005) |
| R602 | 1-208-867-81 | s | RES, CHIP 150 (1005) |
| R603 | 1-208-867-81 | s | RES, CHIP 150 (1005) |
| R604 | 1-208-875-81 | s | RES, CHIP 330 (1005) |
| R606 | 1-208-899-81 | s | RES, CHIP 3.3K (1005) |
| R607 | 1-208-860-81 | s | RES, CHIP 75 (1005) |
| R608 | 1-208-860-81 | s | RES, CHIP 75 (1005) |
| R610 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R611 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R612 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R613 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R614 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R615 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R616 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R617 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R618 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R619 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R620 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R621 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R622 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R623 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R624 | 1-208-899-81 | s | RES, CHIP 3.3K (1005) |
| R628 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R630 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R631 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R633 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R634 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R636 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R640 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R641 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R642 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R644 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R645 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R646 | 1-208-927-81 | s | RES, CHIP 47K (1005) |

(SDI-84/84C BOARD (SUFFIX 15))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R647 | 1-208-943-81 | s | RES, CHIP 220K (1005) |
| R648 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R649 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R651 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R652 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R653 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R654 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R656 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R657 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R658 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R659 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R661 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R663 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R665 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R666 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R667 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R668 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R669 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R670 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R671 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R672 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R673 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R674 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R675 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R676 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R677 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R683 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R687 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R701 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R703 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R704 | 1-208-951-81 | s | RES, CHIP 470K (1005) |
| R705 | 1-208-907-81 | s | RES, CHIP 6.8K (1005) |
| R706 | 1-208-939-81 | s | RES, CHIP 150K (1005) |
| R707 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R708 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R709 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R710 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R711 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R713 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R714 | 1-208-907-81 | s | RES, CHIP 6.8K (1005) |
| R715 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R716 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R717 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R718 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R720 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R722 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R723 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R724 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R725 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R726 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R728 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R730 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R732 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R734 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R736 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R738 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R740 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R741 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R742 | 1-220-870-81 | s | RES, CHIP 10 (1005) |

(SDI-84/84C BOARD (SUFFIX 15))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R744 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R745 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R746 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R747 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R748 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R749 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R801 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R803 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R804 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R805 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R806 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R807 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R808 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R809 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R810 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R811 | 1-208-875-81 | s | RES, CHIP 330 (1005) |
| R812 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R814 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R815 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R816 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R817 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R818 | 1-208-907-81 | s | RES, CHIP 6.8K (1005) |
| R819 | 1-208-867-81 | s | RES, CHIP 150 (1005) |
| R820 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R821 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R822 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R823 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R824 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R825 | 1-208-867-81 | s | RES, CHIP 150 (1005) |
| R826 | 1-208-867-81 | s | RES, CHIP 150 (1005) |
| R851 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R853 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R854 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R855 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R856 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R857 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R858 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R859 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R860 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R861 | 1-208-875-81 | s | RES, CHIP 330 (1005) |
| R862 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R864 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R865 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R866 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R867 | 1-208-907-81 | s | RES, CHIP 6.8K (1005) |
| R868 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R869 | 1-208-867-81 | s | RES, CHIP 150 (1005) |
| R870 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R871 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R872 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R873 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R874 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R875 | 1-208-867-81 | s | RES, CHIP 150 (1005) |
| R876 | 1-208-867-81 | s | RES, CHIP 150 (1005) |
| R904 | 1-220-882-81 | s | RES, CHIP 33 (1005) |
| R905 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R909 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R910 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R911 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |

(SDI-84/84C BOARD (SUFFIX 15))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R912 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R913 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R914 | 1-208-867-81 | s | RES, CHIP 150 (1005) |
| R915 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R916 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R917 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R918 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R919 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R920 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R922 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R923 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R924 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R925 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R926 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R938 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R939 | 1-208-856-81 | s | RES, CHIP 51 (1005) |
| R940 | 1-220-882-81 | s | RES, CHIP 33 (1005) |
| R941 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R942 | 1-208-860-81 | s | RES, CHIP 75 (1005) |
| R943 | 1-208-860-81 | s | RES, CHIP 75 (1005) |
| R944 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R945 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R946 | 1-208-860-81 | s | RES, CHIP 75 (1005) |
| R948 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R950 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R954 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R955 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R956 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R957 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R958 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R959 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| RB201 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB202 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB203 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB204 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB205 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB206 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB207 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB208 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB209 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB210 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB211 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB212 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB213 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB214 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB215 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB216 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB222 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB223 | 1-234-381-21 | s | RES, NETWORK 100K (1005X4) |
| RB224 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB225 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB226 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB227 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB228 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB401 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB402 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB403 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB404 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |

(SDI-84/84C BOARD (SUFFIX 15))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| RB405 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB406 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB407 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB413 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB414 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB415 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB416 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB417 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB418 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB419 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB420 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB421 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB422 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB423 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB424 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB425 | 1-234-371-21 | s | RES, NETWORK 47 (1005X4) |
| RB601 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB602 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB603 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB604 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB701 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB702 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB801 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB802 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB851 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB852 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB901 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB902 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB903 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB904 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB905 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| S201 | 1-692-271-41 | s | SWITCH, SLIDE |
| S202 | 1-771-721-21 | s | SWITCH, TACTILE |
| TP203 | 1-535-877-22 | s | CHIP, CHECKER |
| TP401 | 1-535-877-22 | s | CHIP, CHECKER |
| TP603 | 1-535-877-22 | s | CHIP, CHECKER |
| TP701 | 1-535-877-22 | s | CHIP, CHECKER |
| TP702 | 1-535-877-22 | s | CHIP, CHECKER |
| TP801 | 1-535-877-22 | s | CHIP, CHECKER |
| TP851 | 1-535-877-22 | s | CHIP, CHECKER |
| VDR101 | 1-804-499-21 | s | VARISTOR, CHIP (1608) |
| X201 | 1-814-162-11 | s | OSCILLATOR (VCO) |
| X401 | 1-814-162-11 | s | OSCILLATOR (VCO) |

---
SW-1233 BOARD
---

*1: [Board No. suffix 13-]

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| 1pc | A-1163-069-A | s | MOUNTED CIRCUIT BOARD,SW-1233G (GOLD) |
| | A-1124-074-A | s | MOUNTED CIRCUIT BOARD, SW-1233 (SILVER) |
| 1pc | 3-708-877-01 | s | CAP (PC) |
| 1pc | 3-708-930-01 | s | CAP (PC) |
| 1pc | 3-708-930-21 | s | CAP (PC) |
| 1pc | 3-708-933-01 | s | CAP (PC) |
| 1pc | 3-708-933-11 | s | CAP (PC) |
| 1pc | 3-708-934-01 | s | CAP (PC) |
| 1pc | 1-251-222-21 | s | SOCKET, SIL 7P |
| 1pc | 1-573-201-21 | s | SOCKET, SIL 5P |
| 1pc | 1-573-201-21 | s | SOCKET, SIL 5P |
| 1pc | 1-251-222-21 | s | SOCKET, SIL 7P |
| 1pc | 1-573-201-21 | s | SOCKET, SIL 5P |
| 1pc | 1-573-201-21 | s | SOCKET, SIL 5P |
| 1pc | 1-251-222-21 | s | SOCKET, SIL 7P |
| 1pc | 1-251-222-21 | s | SOCKET, SIL 7P |
| 1pc | 8-719-050-78 | s | LED MD0708C-RG |
| C1 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C2 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C3 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C4 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C5 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C6 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C7 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C8 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C10 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C11 *1 | 1-125-777-11 | s | CERAMIC CHIP 0.1UF 10.00% 10V |
| C12 *1 | 1-100-159-91 | s | CERAMIC CHIP 22UF 10% 6.3V |
| C14 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C100 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C101 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C102 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C103 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| CN1 | 1-778-650-11 | o | CONNECTOR, FFC (ZIF) 30P (SILVER) |
| CN2 | 1-778-650-11 | o | CONNECTOR, FFC (ZIF) 30P (SILVER) |
| CN3 | 1-251-222-21 | s | SOCKET, SIL 7P |
| CN4 | 1-573-201-21 | s | SOCKET, SIL 5P |
| CN5 | 1-573-201-21 | s | SOCKET, SIL 5P |
| CN6 | 1-251-222-21 | s | SOCKET, SIL 7P |
| D1 | 8-719-027-95 | s | DIODE HSM88WK |
| D2 | 8-719-017-42 | s | DIODE HSM88WA |
| D3 | 8-719-078-90 | s | DIODE CL-165HR/G1-D-T |
| D4 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D5 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D6 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D7 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D8 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D9 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D10 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D11 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D12 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D13 | 8-719-024-81 | s | DIODE 1SS300-TE85L |



| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| D14 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D15 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D16 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D17 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D18 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D19 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D20 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D21 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D22 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D23 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D24 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D25 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D26 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D27 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D29 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D30 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D31 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| D32 | 8-719-024-81 | s | DIODE 1SS300-TE85L |
| EN1 | 1-473-435-11 | s | ENCODER, ROTARY(SWITCH) |
| IC1 | 8-759-524-40 | s | IC TC74VHC373FT(EL) |
| IC2 | 8-759-524-40 | s | IC TC74VHC373FT(EL) |
| IC3 | 8-759-531-92 | s | IC TC7WH04FU(TE12R) |
| IC4 | 6-704-238-01 | s | IC S-812C30AUA-C2KT2G |
| IC5 *1 | 6-704-238-01 | s | IC S-812C30AUA-C2KT2G |
| Q1 | 8-729-928-90 | s | TRANSISTOR DTC114EE |
| Q2 | 8-729-928-90 | s | TRANSISTOR DTC114EE |
| Q3 | 8-729-928-90 | s | TRANSISTOR DTC114EE |
| Q4 | 8-729-928-90 | s | TRANSISTOR DTC114EE |
| Q5 | 8-729-928-90 | s | TRANSISTOR DTC114EE |
| Q6 | 8-729-928-90 | s | TRANSISTOR DTC114EE |
| Q7 | 8-729-928-90 | s | TRANSISTOR DTC114EE |
| Q8 | 8-729-928-90 | s | TRANSISTOR DTC114EE |
| Q100 | 8-729-929-08 | s | TRANSISTOR DTC123JE |
| Q101 | 8-729-929-08 | s | TRANSISTOR DTC123JE |
| Q102 | 8-729-929-08 | s | TRANSISTOR DTC123JE |
| Q103 | 8-729-929-08 | s | TRANSISTOR DTC123JE |
| Q104 | 8-729-929-08 | s | TRANSISTOR DTC123JE |
| Q105 | 8-729-929-08 | s | TRANSISTOR DTC123JE |
| Q106 | 8-729-929-08 | s | TRANSISTOR DTC123JE |
| Q107 | 8-729-929-08 | s | TRANSISTOR DTC123JE |
| Q108 | 8-729-162-45 | s | TRANSISTOR 2SB624-BV5 |
| Q109 | 8-729-162-45 | s | TRANSISTOR 2SB624-BV5 |
| Q110 | 8-729-162-45 | s | TRANSISTOR 2SB624-BV5 |
| Q111 | 8-729-162-45 | s | TRANSISTOR 2SB624-BV5 |
| Q112 | 8-729-929-08 | s | TRANSISTOR DTC123JE |
| Q113 | 8-729-929-08 | s | TRANSISTOR DTC123JE |
| Q114 | 8-729-929-08 | s | TRANSISTOR DTC123JE |
| Q115 | 8-729-929-08 | s | TRANSISTOR DTC123JE |
| Q116 | 8-729-929-08 | s | TRANSISTOR DTC123JE |
| Q117 | 8-729-929-08 | s | TRANSISTOR DTC123JE |
| Q118 | 8-729-929-08 | s | TRANSISTOR DTC123JE |
| Q119 | 8-729-929-08 | s | TRANSISTOR DTC123JE |
| Q120 | 8-729-162-45 | s | TRANSISTOR 2SB624-BV5 |
| Q121 | 8-729-162-45 | s | TRANSISTOR 2SB624-BV5 |
| Q122 | 8-729-162-45 | s | TRANSISTOR 2SB624-BV5 |
| Q123 | 8-729-162-45 | s | TRANSISTOR 2SB624-BV5 |
| R1 | 1-208-675-11 | s | RESISTOR CHIP 470 1/16W (1005) |

(SW-1233 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R3 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R4 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R5 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R6 | 1-208-671-11 | s | RESISTOR CHIP 330 1/16W (1005) |
| R11 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R12 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R13 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R14 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R16 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R18 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R20 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R22 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R23 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R24 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R25 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R26 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R27 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R29 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R31 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R34 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R35 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R36 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R37 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R38 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R100 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R101 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R102 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R103 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R104 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R105 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R106 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R107 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R108 | 1-211-989-11 | s | RESISTOR,CHIP 68 1/10W (1608) |
| R109 | 1-211-989-11 | s | RESISTOR,CHIP 68 1/10W (1608) |
| R110 | 1-211-989-11 | s | RESISTOR,CHIP 68 1/10W (1608) |
| R111 | 1-211-989-11 | s | RESISTOR,CHIP 68 1/10W (1608) |
| R112 | 1-211-989-11 | s | RESISTOR,CHIP 68 1/10W (1608) |
| R113 | 1-211-989-11 | s | RESISTOR,CHIP 68 1/10W (1608) |
| R114 | 1-211-989-11 | s | RESISTOR,CHIP 68 1/10W (1608) |
| R115 | 1-211-989-11 | s | RESISTOR,CHIP 68 1/10W (1608) |
| R116 | 1-211-977-11 | s | RESISTOR,CHIP 22 1/10W (1608) |
| R117 | 1-211-977-11 | s | RESISTOR,CHIP 22 1/10W (1608) |
| R118 | 1-211-977-11 | s | RESISTOR,CHIP 22 1/10W (1608) |
| R119 | 1-211-977-11 | s | RESISTOR,CHIP 22 1/10W (1608) |
| R120 | 1-211-977-11 | s | RESISTOR,CHIP 22 1/10W (1608) |
| R121 | 1-211-977-11 | s | RESISTOR,CHIP 22 1/10W (1608) |
| R122 | 1-211-977-11 | s | RESISTOR,CHIP 22 1/10W (1608) |
| R123 | 1-211-977-11 | s | RESISTOR,CHIP 22 1/10W (1608) |
| R124 | 1-216-864-11 | s | CONDUCTOR, CHIP (1608) |
| RV1 | 1-223-741-11 | s | RESISTOR, METAL CARBON VAR 50K |
| RV2 | 1-223-741-11 | s | RESISTOR, METAL CARBON VAR 50K |
| RV3 | 1-223-741-11 | s | RESISTOR, METAL CARBON VAR 50K |
| RV4 | 1-223-741-11 | s | RESISTOR, METAL CARBON VAR 50K |
| RV5 | 1-223-741-11 | s | RESISTOR, METAL CARBON VAR 50K |
| S1 | 1-786-840-11 | s | SWITCH, ROTARY |
| S2 | 1-786-840-11 | s | SWITCH, ROTARY |
| S3 | 1-786-840-11 | s | SWITCH, ROTARY |
| S4 | 1-786-840-11 | s | SWITCH, ROTARY |
| S5 | 1-762-122-11 | s | SWITCH, TOGGLE |

(SW-1233 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| S6 | 1-762-122-11 | s | SWITCH, TOGGLE |
| S7 | 1-762-122-11 | s | SWITCH, TOGGLE |
| S8 | 1-762-122-11 | s | SWITCH, TOGGLE |
| S9 | 1-762-123-11 | s | SWITCH, TOGGLE |
| S10 | 1-762-531-11 | s | SWITCH, TOGGLE |
| S11 | 1-762-129-11 | s | SWITCH, TACTILE (ILLUMINATED) |
| S12 | 1-762-129-21 | s | SWITCH, TACTILE (ILLUMINATED) |
| S13 | 1-762-129-31 | s | SWITCH, TACTILE (ILLUMINATED) |
| S14 | 1-762-131-11 | s | SWITCH, TACTILE (ILLUMINATED) |
| S15 | 1-762-132-11 | s | SWITCH, TACTILE (ILLUMINATED) |
| S20 | 1-762-132-21 | s | SWITCH, TACTILE (ILLUMINATED) |
| S21 | 1-762-133-11 | s | SWITCH, TACTILE (ILLUMINATED) |
| S22 | 1-692-994-11 | s | SWITCH, TACTILE (ILLUMINATED) |
| S24 | 1-762-122-11 | s | SWITCH, TOGGLE |
| S25 | 1-762-123-11 | s | SWITCH, TOGGLE |
| S26 | 1-786-839-11 | s | SWITCH, PUSH |
| S27 | 1-786-839-11 | s | SWITCH, PUSH |
| S29 | 1-786-839-11 | s | SWITCH, PUSH |
| S30 | 1-786-839-11 | s | SWITCH, PUSH |
| S31 | 1-786-839-11 | s | SWITCH, PUSH |

---

SW-1236 BOARD

---

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C4 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C5 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C6 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C7 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| CN1 | 1-779-806-21 | s | CONNECTOR, 1.0MM PITCH 8P |
| CN2 | 1-770-622-21 | s | PIN, CONNECTOR 5P |
| FB1 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB2 | 1-234-518-21 | s | ARRAY, FERRITE CHIP |
| R3 | 1-216-864-11 | s | CONDUCTOR, CHIP (1608) |
| S1 | 1-692-112-11 | s | SWITCH, TACTIL |
| S2 | 1-692-112-11 | s | SWITCH, TACTIL |

---
SW-1237 BOARD
---

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| 1pc | A-1099-125-A | s | MOUNTED CIRCUIT BOARD, SW-1237 |
| C1 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C2 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C3 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C4 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C5 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C6 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C7 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C8 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C10 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C11 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C12 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C13 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C14 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| CN1 | 1-779-806-21 | s | CONNECTOR, 1.0MM PITCH 8P |
| CN2 | 1-793-152-21 | o | CONNECTOR 11P |
| D1 | 8-719-820-41 | s | DIODE 1SS302 |
| IC1 | 6-702-481-01 | s | IC PCA9555DB-118 |
| IC2 | 8-759-592-42 | s | IC TC7SZ00FU(TE85R) |
| IC3 | 8-759-592-42 | s | IC TC7SZ00FU(TE85R) |
| R1 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R2 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R3 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R4 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R5 | 1-216-864-11 | s | CONDUCTOR, CHIP (1608) |
| R6 | 1-216-864-11 | s | CONDUCTOR, CHIP (1608) |
| R9 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R10 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R18 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R19 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R20 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R21 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| RB1 | 1-234-375-21 | s | RES, NETWORK 1KX4 (1005) |
| RB3 | 1-234-380-11 | s | RESISTOR,NETWORK 47KX4 (1005) |
| RB4 | 1-234-375-21 | s | RES, NETWORK 1KX4 (1005) |
| RB7 | 1-234-380-11 | s | RESISTOR,NETWORK 47KX4 (1005) |
| RB9 | 1-234-380-11 | s | RESISTOR,NETWORK 47KX4 (1005) |
| RB10 | 1-234-380-11 | s | RESISTOR,NETWORK 47KX4 (1005) |
| S1 | 1-786-725-21 | s | SWITCH, TACTILE |
| S2 | 1-786-725-21 | s | SWITCH, TACTILE |
| S3 | 1-786-725-21 | s | SWITCH, TACTILE |
| S4 | 1-786-725-21 | s | SWITCH, TACTILE |

---
SW-1238 BOARD
---

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C1 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| CN1 | 1-770-619-11 | s | PIN, CONNECTOR 2P |
| R1 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| S1 | 1-786-725-21 | s | SWITCH, TACTILE |

---
SW-1239 BOARD
---

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| 1pc | A-1099-127-A | s | MOUNTED CIRCUIT BOARD, SW-1239 |
| C1 | 1-127-760-11 | s | CAPACITOR,CERAMIC 4.7MF/6.3V |
| C2 | 1-127-760-11 | s | CAPACITOR,CERAMIC 4.7MF/6.3V |
| C3 | 1-127-760-11 | s | CAPACITOR,CERAMIC 4.7MF/6.3V |
| C4 | 1-107-826-11 | s | CAPACITOR,CHIP CERAMIC 0.1MF |
| C5 | 1-162-966-11 | s | CAPACITOR,CERAMIC 2200PF/50V B |
| C6 | 1-127-760-11 | s | CAPACITOR,CERAMIC 4.7MF/6.3V |
| C7 | 1-162-966-11 | s | CAPACITOR,CERAMIC 2200PF/50V B |
| C8 | 1-127-760-11 | s | CAPACITOR,CERAMIC 4.7MF/6.3V |
| C10 | 1-162-970-11 | s | CAPACITOR CERAMIC 0.01MF/25V B |
| C11 | 1-162-970-11 | s | CAPACITOR CERAMIC 0.01MF/25V B |
| C12 | 1-162-970-11 | s | CAPACITOR CERAMIC 0.01MF/25V B |
| C13 | 1-162-970-11 | s | CAPACITOR CERAMIC 0.01MF/25V B |
| C14 | 1-162-970-11 | s | CAPACITOR CERAMIC 0.01MF/25V B |
| C15 | 1-162-970-11 | s | CAPACITOR CERAMIC 0.01MF/25V B |
| C16 | 1-162-970-11 | s | CAPACITOR CERAMIC 0.01MF/25V B |
| CN3 | 1-770-630-21 | s | PIN, CONNECTOR (L TYPE) 13P |
| FB1 | 1-234-518-21 | s | ARRAY, FERRITE CHIP |
| FB2 | 1-234-518-21 | s | ARRAY, FERRITE CHIP |
| IC1 | 8-759-337-40 | s | IC NJM2904V(TE2) |
| Q1 | 8-729-927-99 | s | TRANSISTOR 2SC4617R |
| R1 | 1-218-895-11 | s | RESISTOR,CHIP 100K 1/10W(1608) |
| R2 | 1-218-871-11 | s | RESISTOR,CHIP 10K 1/10W (1608) |
| R3 | 1-218-895-11 | s | RESISTOR,CHIP 100K 1/10W(1608) |
| R4 | 1-218-895-11 | s | RESISTOR,CHIP 100K 1/10W(1608) |
| R5 | 1-218-871-11 | s | RESISTOR,CHIP 10K 1/10W (1608) |
| R6 | 1-218-895-11 | s | RESISTOR,CHIP 100K 1/10W(1608) |
| R7 | 1-216-864-11 | s | CONDUCTOR, CHIP (1608) |
| R8 | 1-218-847-11 | s | RESISTOR, CHIP 1K 1/10W (1608) |
| R9 | 1-218-847-11 | s | RESISTOR, CHIP 1K 1/10W (1608) |
| R10 | 1-218-847-11 | s | RESISTOR, CHIP 1K 1/10W (1608) |
| R11 | 1-218-847-11 | s | RESISTOR, CHIP 1K 1/10W (1608) |
| R12 | 1-218-847-11 | s | RESISTOR, CHIP 1K 1/10W (1608) |
| RV1 | 1-227-244-11 | s | RESISTOR, VAR, CARBON 5K/5K |
| S1 | 1-570-282-21 | s | SWITCH, KEY BOARD |
| S2 | 1-571-416-11 | s | SWITCH,TOGGLE |
| S3 | 1-571-679-11 | s | SWITCH,TOGGLE |
| S4 | 1-570-610-11 | s | SWITCH,TOGGLE |

## SW-1240 BOARD

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| 1pc | A-1099-128-A | s | MOUNTED CIRCUIT BOARD, SW-1240 |
| C1 | 1-162-970-11 | s | CAPACITOR CERAMIC 0.01MF/25V B |
| C2 | 1-162-970-11 | s | CAPACITOR CERAMIC 0.01MF/25V B |
| C3 | 1-162-970-11 | s | CAPACITOR CERAMIC 0.01MF/25V B |
| C4 | 1-162-970-11 | s | CAPACITOR CERAMIC 0.01MF/25V B |
| C5 | 1-162-970-11 | s | CAPACITOR CERAMIC 0.01MF/25V B |
| C6 | 1-162-970-11 | s | CAPACITOR CERAMIC 0.01MF/25V B |
| C7 | 1-162-970-11 | s | CAPACITOR CERAMIC 0.01MF/25V B |
| C8 | 1-162-970-11 | s | CAPACITOR CERAMIC 0.01MF/25V B |
| C9 | 1-162-970-11 | s | CAPACITOR CERAMIC 0.01MF/25V B |
| C10 | 1-162-970-11 | s | CAPACITOR CERAMIC 0.01MF/25V B |
| CN1 | 1-770-628-11 | s | PIN, CONNECTOR 11P |
| FB1 | 1-234-518-21 | s | ARRAY, FERRITE CHIP |
| FB2 | 1-234-518-21 | s | ARRAY, FERRITE CHIP |
| FB3 | 1-234-518-21 | s | ARRAY, FERRITE CHIP |
| R2 | 1-218-847-11 | s | RESISTOR, CHIP 1K 1/10W (1608) |
| R3 | 1-218-847-11 | s | RESISTOR, CHIP 1K 1/10W (1608) |
| R4 | 1-218-847-11 | s | RESISTOR, CHIP 1K 1/10W (1608) |
| R5 | 1-218-847-11 | s | RESISTOR, CHIP 1K 1/10W (1608) |
| R6 | 1-218-847-11 | s | RESISTOR, CHIP 1K 1/10W (1608) |
| S2 | 1-762-000-11 | s | SWITCH, TOGGLE |
| S3 | 1-762-019-11 | s | SWITCH, TOGGLE |
| S4 | 1-762-000-11 | s | SWITCH, TOGGLE |
| S5 | 1-762-489-11 | s | SWITCH, TOGGLE |
| S6 | 1-762-000-11 | s | SWITCH, TOGGLE |

## SW-1241/1241B BOARD (SUFFIX -15)

*A: [HDC1500(J,SY)/1550(UC)/1600(J)]
*B: [HDC1400(CE)/1450(CE)/1500(CE)/1550(CE)/1580(CN)]

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| 1pc *A | A-1099-129-A | s | MOUNTED CIRCUIT BOARD, SW-1241 |
| *B | A-1166-843-A | s | MOUNTED CIRCUIT BOARD, SW-1241B |
| C1 | 1-162-964-91 | s | CAP,CHIP CERAMIC 1000PF B 1608 |
| C2 | 1-162-964-91 | s | CAP,CHIP CERAMIC 1000PF B 1608 |
| C3 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C4 | 1-162-964-91 | s | CAP,CHIP CERAMIC 1000PF B 1608 |
| C5 | 1-162-964-91 | s | CAP,CHIP CERAMIC 1000PF B 1608 |
| C6 | 1-162-964-91 | s | CAP,CHIP CERAMIC 1000PF B 1608 |
| C7 | 1-162-964-91 | s | CAP,CHIP CERAMIC 1000PF B 1608 |
| C8 | 1-162-964-91 | s | CAP,CHIP CERAMIC 1000PF B 1608 |
| C9 | 1-162-964-91 | s | CAP,CHIP CERAMIC 1000PF B 1608 |
| C10 | 1-162-964-91 | s | CAP,CHIP CERAMIC 1000PF B 1608 |
| C11 | 1-162-964-91 | s | CAP,CHIP CERAMIC 1000PF B 1608 |
| C12 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C13 | 1-162-927-91 | s | CAP, CERAMIC 100PF CH 1608 |
| C14 | 1-162-927-91 | s | CAP, CERAMIC 100PF CH 1608 |
| C15 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C16 | 1-162-964-91 | s | CAP,CHIP CERAMIC 1000PF B 1608 |
| C17 | 1-162-964-91 | s | CAP,CHIP CERAMIC 1000PF B 1608 |
| C18 | 1-162-964-91 | s | CAP,CHIP CERAMIC 1000PF B 1608 |
| C19 | 1-162-964-91 | s | CAP,CHIP CERAMIC 1000PF B 1608 |
| C20 | 1-162-964-91 | s | CAP,CHIP CERAMIC 1000PF B 1608 |
| C21 | 1-162-964-91 | s | CAP,CHIP CERAMIC 1000PF B 1608 |
| CN1 | 1-784-435-21 | o | CONNECTOR, BOARD TO BOARD 30P |
| D8 | 8-719-024-83 | s | DIODE 1SS301-TE85L |
| D9 | 8-719-024-83 | s | DIODE 1SS301-TE85L |
| FB1 | 1-234-518-21 | s | ARRAY, FERRITE CHIP |
| FB2 | 1-234-518-21 | s | ARRAY, FERRITE CHIP |
| FB3 | 1-234-518-21 | s | ARRAY, FERRITE CHIP |
| FB4 | 1-234-518-21 | s | ARRAY, FERRITE CHIP |
| FB5 | 1-234-518-21 | s | ARRAY, FERRITE CHIP |
| IC1 | 6-702-481-01 | s | IC PCA9555DB-118 |
| R1 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| R2 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| R3 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| R4 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| R5 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| R6 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| R7 | 1-218-847-91 | s | RES, CHIP 1.0K (1608) |
| R8 | 1-218-847-91 | s | RES, CHIP 1.0K (1608) |
| R9 | 1-211-985-91 | s | RES, CHIP 47 (1608) |
| R10 | 1-211-985-91 | s | RES, CHIP 47 (1608) |
| R11 | 1-218-839-91 | s | RES, CHIP 470 (1608) |
| R12 | 1-218-839-91 | s | RES, CHIP 470 (1608) |
| R13 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R14 *A | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R15 *A | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| R16 *B | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| R17 *A | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| R18 *B | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| R23 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R24 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R25 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |

(SW-1241/1241B BOARD (SUFFIX -15))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| RB1 | 1-234-375-21 | s | RES, NETWORK 1K (1005X4) |
| RB2 | 1-234-375-21 | s | RES, NETWORK 1K (1005X4) |
| RB3 | 1-234-375-21 | s | RES, NETWORK 1K (1005X4) |
| RB4 | 1-234-375-21 | s | RES, NETWORK 1K (1005X4) |
| RB5 | 1-234-380-21 | s | RES, NETWORK 47K (1005X4) |
| RB6 | 1-234-380-21 | s | RES, NETWORK 47K (1005X4) |
| RB7 | 1-234-380-21 | s | RES, NETWORK 47K (1005X4) |
| RB8 | 1-234-380-21 | s | RES, NETWORK 47K (1005X4) |
| RV1 | 1-238-294-11 | s | RES, VAR, CARBON 100K |
| RV2 | 1-238-294-11 | s | RES, VAR, CARBON 100K |
| RV3 | 1-238-294-11 | s | RES, VAR, CARBON 100K |
| RV4 | 1-238-294-11 | s | RES, VAR, CARBON 100K |
| *A RV5 | 1-238-294-11 | s | RES, VAR, CARBON 100K |
| RV6 | 1-238-294-11 | s | RES, VAR, CARBON 100K |
| S3 | 1-570-608-11 | s | SWITCH, TOGGLE |
| S7 | 1-570-985-11 | s | SWITCH, TOGGLE |
| S8 | 1-570-985-11 | s | SWITCH, TOGGLE |
| *A S9 | 1-570-608-11 | s | SWITCH, TOGGLE |
| S10 | 1-570-608-11 | s | SWITCH, TOGGLE |

SW-1241 BOARD (SUFFIX -13) [HDC1500(J,SY)/1550(UC)/1600(J)]

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| 1pc | A-1099-129-A | s | MOUNTED CIRCUIT BOARD, SW-1241 |
| C1 | 1-162-964-11 | s | CAPACITOR,CERAMIC 1000PF/50V B |
| C2 | 1-162-964-11 | s | CAPACITOR,CERAMIC 1000PF/50V B |
| C3 | 1-107-826-11 | s | CAPACITOR,CHIP CERAMIC 0.1MF |
| C4 | 1-162-964-11 | s | CAPACITOR,CERAMIC 1000PF/50V B |
| C5 | 1-162-964-11 | s | CAPACITOR,CERAMIC 1000PF/50V B |
| C6 | 1-162-964-11 | s | CAPACITOR,CERAMIC 1000PF/50V B |
| C7 | 1-162-964-11 | s | CAPACITOR,CERAMIC 1000PF/50V B |
| C8 | 1-162-964-11 | s | CAPACITOR,CERAMIC 1000PF/50V B |
| C9 | 1-162-964-11 | s | CAPACITOR,CERAMIC 1000PF/50V B |
| C10 | 1-162-964-11 | s | CAPACITOR,CERAMIC 1000PF/50V B |
| C11 | 1-162-964-11 | s | CAPACITOR,CERAMIC 1000PF/50V B |
| C12 | 1-107-826-11 | s | CAPACITOR,CHIP CERAMIC 0.1MF |
| C13 | 1-162-927-11 | s | CAPACITOR,CERAMIC 100PF/50V CH |
| C14 | 1-162-927-11 | s | CAPACITOR,CERAMIC 100PF/50V CH |
| C15 | 1-107-826-11 | s | CAPACITOR,CHIP CERAMIC 0.1MF |
| C16 | 1-162-964-11 | s | CAPACITOR,CERAMIC 1000PF/50V B |
| C17 | 1-162-964-11 | s | CAPACITOR,CERAMIC 1000PF/50V B |
| C18 | 1-162-964-11 | s | CAPACITOR,CERAMIC 1000PF/50V B |
| C19 | 1-162-964-11 | s | CAPACITOR,CERAMIC 1000PF/50V B |
| C20 | 1-162-964-11 | s | CAPACITOR,CERAMIC 1000PF/50V B |
| C21 | 1-162-964-11 | s | CAPACITOR,CERAMIC 1000PF/50V B |
| CN1 | 1-784-435-11 | o | CONNECTOR, BOARD TO BOARD 30P |
| D8 | 8-719-801-78 | s | DIODE 1SS184 |
| FB1 | 1-234-518-21 | s | ARRAY, FERRITE CHIP |
| FB2 | 1-234-518-21 | s | ARRAY, FERRITE CHIP |
| FB3 | 1-234-518-21 | s | ARRAY, FERRITE CHIP |
| FB4 | 1-234-518-21 | s | ARRAY, FERRITE CHIP |
| FB5 | 1-234-518-21 | s | ARRAY, FERRITE CHIP |
| IC1 | 6-702-481-01 | s | IC PCA9555DB-118 |
| R1 | 1-216-864-11 | s | CONDUCTOR, CHIP (1608) |
| R2 | 1-216-864-11 | s | CONDUCTOR, CHIP (1608) |
| R3 | 1-216-864-11 | s | CONDUCTOR, CHIP (1608) |
| R4 | 1-216-864-11 | s | CONDUCTOR, CHIP (1608) |
| R5 | 1-216-864-11 | s | CONDUCTOR, CHIP (1608) |
| R6 | 1-216-864-11 | s | CONDUCTOR, CHIP (1608) |
| R7 | 1-218-847-11 | s | RESISTOR, CHIP 1K 1/10W (1608) |
| R8 | 1-218-847-11 | s | RESISTOR, CHIP 1K 1/10W (1608) |
| R9 | 1-211-985-11 | s | RESISTOR,CHIP 47 1/10W (1608) |
| R10 | 1-211-985-11 | s | RESISTOR,CHIP 47 1/10W (1608) |
| R11 | 1-218-839-11 | s | RESISTOR,CHIP 470 1/10W (1608) |
| R12 | 1-218-839-11 | s | RESISTOR,CHIP 470 1/10W (1608) |
| R23 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R24 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R25 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| RB1 | 1-234-375-21 | s | RES, NETWORK 1KX4 (1005) |
| RB2 | 1-234-375-21 | s | RES, NETWORK 1KX4 (1005) |
| RB3 | 1-234-375-21 | s | RES, NETWORK 1KX4 (1005) |
| RB4 | 1-234-375-21 | s | RES, NETWORK 1KX4 (1005) |
| RB5 | 1-234-380-11 | s | RESISTOR,NETWORK 47KX4 (1005) |
| RB6 | 1-234-380-11 | s | RESISTOR,NETWORK 47KX4 (1005) |
| RB7 | 1-234-380-11 | s | RESISTOR,NETWORK 47KX4 (1005) |
| RB8 | 1-234-380-11 | s | RESISTOR,NETWORK 47KX4 (1005) |
| RV1 | 1-238-294-11 | s | RESISTOR, VAR,CARBON 100K |
| RV2 | 1-238-294-11 | s | RESISTOR, VAR,CARBON 100K |

(SW-1241 BOARD (SUFFIX -13) [HDC1500(J,SY)/1550(UC)/1600(J)])

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| RV3 | 1-238-294-11 | s | RESISTOR, VAR,CARBON 100K |
| RV4 | 1-238-294-11 | s | RESISTOR, VAR,CARBON 100K |
| RV5 | 1-238-294-11 | s | RESISTOR, VAR,CARBON 100K |
| RV6 | 1-238-294-11 | s | RESISTOR, VAR,CARBON 100K |
| S3 | 1-570-608-11 | s | SWITCH,TOGGLE |
| S7 | 1-570-985-11 | s | SWITCH,TOGGLE |
| S8 | 1-570-985-11 | s | SWITCH,TOGGLE |
| S9 | 1-570-608-11 | s | SWITCH,TOGGLE |
| S10 | 1-570-608-11 | s | SWITCH,TOGGLE |

---

SW-1242 BOARD

---

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C1 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C2 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C3 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C4 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| FB1 | 1-234-518-21 | s | ARRAY, FERRITE CHIP |
| S1 | 1-786-841-11 | s | SWITCH, TOGGLE |
| S2 | 1-786-841-11 | s | SWITCH, TOGGLE |

---

SW-1245 BOARD

---

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| CN1 | 1-779-884-11 | s | PLUG, CONNECTOR 4P |
| EN1 | 1-473-315-11 | s | ENCODER, ROTARY (SWITCH) |

---

SW-1273 BOARD (SUFFIX -21)

---

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| 1pc | A-1159-986-A | s | MOUNTED CIRCUIT BOARD, SW-1273G |
| C1 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C2 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C3 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C4 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C5 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C6 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C7 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C8 | 1-162-964-91 | s | CAP,CHIP CERAMIC 1000PF B 1608 |
| C9 | 1-162-964-91 | s | CAP,CHIP CERAMIC 1000PF B 1608 |
| C10 | 1-162-964-91 | s | CAP,CHIP CERAMIC 1000PF B 1608 |
| C11 | 1-162-964-91 | s | CAP,CHIP CERAMIC 1000PF B 1608 |
| C12 | 1-162-964-91 | s | CAP,CHIP CERAMIC 1000PF B 1608 |
| C13 | 1-162-964-91 | s | CAP,CHIP CERAMIC 1000PF B 1608 |
| C14 | 1-162-964-91 | s | CAP,CHIP CERAMIC 1000PF B 1608 |
| C15 | 1-162-964-91 | s | CAP,CHIP CERAMIC 1000PF B 1608 |
| C16 | 1-162-964-91 | s | CAP,CHIP CERAMIC 1000PF B 1608 |
| C17 | 1-162-964-91 | s | CAP,CHIP CERAMIC 1000PF B 1608 |
| C18 | 1-162-964-91 | s | CAP,CHIP CERAMIC 1000PF B 1608 |
| C19 | 1-162-964-91 | s | CAP,CHIP CERAMIC 1000PF B 1608 |
| C20 | 1-162-964-91 | s | CAP,CHIP CERAMIC 1000PF B 1608 |
| C21 | 1-162-964-91 | s | CAP,CHIP CERAMIC 1000PF B 1608 |
| CN1 | 1-816-562-31 | s | CONNECTOR, FFC/FPC(ZIF) ST 36P |
| CN2 | 1-784-241-21 | o | CONNECTOR, BOARD TO BOARD 30P |
| CN3 | 1-770-627-21 | s | PIN, CONNECTOR 10P |
| CN4 | 1-784-254-21 | s | CONNECTOR 10P |
| D1 | 6-500-936-01 | s | DIODE CL-194WE-D-T |
| D2 | 6-500-936-01 | s | DIODE CL-194WE-D-T |
| D3 | 6-500-936-01 | s | DIODE CL-194WE-D-T |
| D4 | 6-500-936-01 | s | DIODE CL-194WE-D-T |
| D5 | 6-500-936-01 | s | DIODE CL-194WE-D-T |
| D6 | 6-500-936-01 | s | DIODE CL-194WE-D-T |
| D7 | 6-500-936-01 | s | DIODE CL-194WE-D-T |
| D8 | 6-500-936-01 | s | DIODE CL-194WE-D-T |
| D9 | 8-719-820-42 | s | DIODE 1SS302-TE85L |
| D10 | 6-500-936-01 | s | DIODE CL-194WE-D-T |
| D11 | 6-500-936-01 | s | DIODE CL-194WE-D-T |
| D12 | 6-500-936-01 | s | DIODE CL-194WE-D-T |
| D13 | 6-500-936-01 | s | DIODE CL-194WE-D-T |
| D14 | 6-500-936-01 | s | DIODE CL-194WE-D-T |
| D15 | 6-500-936-01 | s | DIODE CL-194WE-D-T |
| D16 | 6-500-936-01 | s | DIODE CL-194WE-D-T |
| D17 | 6-500-936-01 | s | DIODE CL-194WE-D-T |
| D18 | 6-500-936-01 | s | DIODE CL-194WE-D-T |
| D19 | 6-500-936-01 | s | DIODE CL-194WE-D-T |
| D20 | 6-500-936-01 | s | DIODE CL-194WE-D-T |
| FB1 | 1-234-518-21 | s | ARRAY, FERRITE CHIP |
| FB2 | 1-234-518-21 | s | ARRAY, FERRITE CHIP |
| FB3 | 1-234-518-21 | s | ARRAY, FERRITE CHIP |
| FB4 | 1-234-518-21 | s | ARRAY, FERRITE CHIP |
| IC1 | 6-702-481-01 | s | IC PCA9555DB-118 |
| Q1 | 8-729-928-55 | s | TRANSISTOR DTA123JE-TL |
| Q2 | 8-729-928-55 | s | TRANSISTOR DTA123JE-TL |
| R1 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R2 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R3 | 1-208-883-81 | s | RES, CHIP 680 (1005) |

(SW-1273 BOARD (SUFFIX -21))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R4 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R5 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R6 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R7 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R8 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R9 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R10 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R11 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R12 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R13 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R14 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R15 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R16 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R17 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R18 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R19 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R20 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R21 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R22 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R23 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R28 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| RB1 | 1-234-375-21 | s | RES, NETWORK 1K (1005X4) |
| RB2 | 1-234-375-21 | s | RES, NETWORK 1K (1005X4) |
| RB3 | 1-234-375-21 | s | RES, NETWORK 1K (1005X4) |
| RB4 | 1-234-375-21 | s | RES, NETWORK 1K (1005X4) |
| RB6 | 1-234-380-21 | s | RES, NETWORK 47K (1005X4) |
| RB7 | 1-234-380-21 | s | RES, NETWORK 47K (1005X4) |
| RB8 | 1-234-380-21 | s | RES, NETWORK 47K (1005X4) |
| S1 | 1-786-725-21 | s | SWITCH, TACTILE |
| S2 | 1-786-725-21 | s | SWITCH, TACTILE |
| S5 | 1-786-887-11 | s | SWITCH,ROTARY |
| S6 | 1-786-887-11 | s | SWITCH,ROTARY |

---

SW-1273 BOARD (SUFFIX -13)

---

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| 1pc | A-1159-986-A | s | MOUNTED CIRCUIT BOARD,SW-1273G (GOLD) |
| | A-1099-356-A | s | MOUNTED CIRCUIT BOARD, SW-1273 (SILVER) |
| C1 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C2 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C3 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C4 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C5 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C6 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C7 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C8 | 1-162-964-11 | s | CAPACITOR,CERAMIC 1000PF/50V B |
| C9 | 1-162-964-11 | s | CAPACITOR,CERAMIC 1000PF/50V B |
| C10 | 1-162-964-11 | s | CAPACITOR,CERAMIC 1000PF/50V B |
| C11 | 1-162-964-11 | s | CAPACITOR,CERAMIC 1000PF/50V B |
| C12 | 1-162-964-11 | s | CAPACITOR,CERAMIC 1000PF/50V B |
| C13 | 1-162-964-11 | s | CAPACITOR,CERAMIC 1000PF/50V B |
| C14 | 1-162-964-11 | s | CAPACITOR,CERAMIC 1000PF/50V B |
| C15 | 1-162-964-11 | s | CAPACITOR,CERAMIC 1000PF/50V B |
| C16 | 1-162-964-11 | s | CAPACITOR,CERAMIC 1000PF/50V B |
| C17 | 1-162-964-11 | s | CAPACITOR,CERAMIC 1000PF/50V B |
| C18 | 1-162-964-11 | s | CAPACITOR,CERAMIC 1000PF/50V B |
| C19 | 1-162-964-11 | s | CAPACITOR,CERAMIC 1000PF/50V B |
| C20 | 1-162-964-11 | s | CAPACITOR,CERAMIC 1000PF/50V B |
| C21 | 1-162-964-11 | s | CAPACITOR,CERAMIC 1000PF/50V B |
| CN1 | 1-816-562-31 | s | CONNECTOR, FFC/FPC(ZIF) ST 36P (GOLD) |
| | 1-816-562-21 | s | CONNECTOR, FFC (ZIF) 36P (SILVER) |
| CN2 | 1-784-241-11 | o | CONNECTOR, BOARD TO BOARD 30P |
| CN3 | 1-770-627-21 | s | PIN, CONNECTOR 10P |
| CN4 | 1-784-254-11 | s | CONNECTOR 10P |
| D1 | 6-500-936-01 | s | DIODE CL-194WE-D-T |
| D2 | 6-500-936-01 | s | DIODE CL-194WE-D-T |
| D3 | 6-500-936-01 | s | DIODE CL-194WE-D-T |
| D4 | 6-500-936-01 | s | DIODE CL-194WE-D-T |
| D5 | 6-500-936-01 | s | DIODE CL-194WE-D-T |
| D6 | 6-500-936-01 | s | DIODE CL-194WE-D-T |
| D7 | 6-500-936-01 | s | DIODE CL-194WE-D-T |
| D9 | 8-719-820-41 | s | DIODE 1SS302 |
| D10 | 6-500-936-01 | s | DIODE CL-194WE-D-T |
| D11 | 6-500-936-01 | s | DIODE CL-194WE-D-T |
| D12 | 6-500-936-01 | s | DIODE CL-194WE-D-T |
| D13 | 6-500-936-01 | s | DIODE CL-194WE-D-T |
| D14 | 6-500-936-01 | s | DIODE CL-194WE-D-T |
| D15 | 6-500-936-01 | s | DIODE CL-194WE-D-T |
| D16 | 6-500-936-01 | s | DIODE CL-194WE-D-T |
| FB1 | 1-234-518-21 | s | ARRAY, FERRITE CHIP |
| FB2 | 1-234-518-21 | s | ARRAY, FERRITE CHIP |
| FB3 | 1-234-518-21 | s | ARRAY, FERRITE CHIP |
| FB4 | 1-234-518-21 | s | ARRAY, FERRITE CHIP |
| IC1 | 6-702-481-01 | s | IC PCA9555DB-118 |
| Q1 | 8-729-928-55 | s | TRANSISTOR DTA123JE-TL |
| Q2 | 8-729-928-55 | s | TRANSISTOR DTA123JE-TL |
| Q3 | 8-729-928-55 | s | TRANSISTOR DTA123JE-TL |
| Q4 | 8-729-928-55 | s | TRANSISTOR DTA123JE-TL |
| R1 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |

(SW-1273 BOARD (SUFFIX -13))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R2 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R3 | 1-208-679-11 | s | RESISTOR CHIP 680 1/16W (1005) |
| R4 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R5 | 1-208-679-11 | s | RESISTOR CHIP 680 1/16W (1005) |
| R6 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R7 | 1-208-679-11 | s | RESISTOR CHIP 680 1/16W (1005) |
| R8 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R9 | 1-208-679-11 | s | RESISTOR CHIP 680 1/16W (1005) |
| R10 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R11 | 1-208-679-11 | s | RESISTOR CHIP 680 1/16W (1005) |
| R12 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R13 | 1-208-679-11 | s | RESISTOR CHIP 680 1/16W (1005) |
| R14 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R15 | 1-208-679-11 | s | RESISTOR CHIP 680 1/16W (1005) |
| R16 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R21 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R22 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R28 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R40 | 1-208-679-11 | s | RESISTOR CHIP 680 1/16W (1005) |
| R41 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R42 | 1-208-679-11 | s | RESISTOR CHIP 680 1/16W (1005) |
| R43 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R44 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R45 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R46 | 1-208-679-11 | s | RESISTOR CHIP 680 1/16W (1005) |
| R47 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R48 | 1-208-679-11 | s | RESISTOR CHIP 680 1/16W (1005) |
| R49 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R50 | 1-208-679-11 | s | RESISTOR CHIP 680 1/16W (1005) |
| R51 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R52 | 1-208-679-11 | s | RESISTOR CHIP 680 1/16W (1005) |
| R53 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| RB1 | 1-234-380-11 | s | RESISTOR,NETWORK 47KX4 (1005) |
| RB2 | 1-234-375-21 | s | RES, NETWORK 1KX4 (1005) |
| RB3 | 1-234-375-21 | s | RES, NETWORK 1KX4 (1005) |
| RB4 | 1-234-375-21 | s | RES, NETWORK 1KX4 (1005) |
| RB6 | 1-234-380-11 | s | RESISTOR,NETWORK 47KX4 (1005) |
| RB7 | 1-234-380-11 | s | RESISTOR,NETWORK 47KX4 (1005) |
| RB8 | 1-234-380-11 | s | RESISTOR,NETWORK 47KX4 (1005) |
| S1 | 1-786-725-21 | s | SWITCH, TACTILE |
| S2 | 1-786-725-21 | s | SWITCH, TACTILE |
| S5 | 1-786-887-11 | s | SWITCH,ROTARY |
| S6 | 1-786-887-11 | s | SWITCH,ROTARY |

---

TG-243 BOARD (SUFFIX -14,21,22) [HDC1000/1400/1500/1550]

---

*1: [Board No. suffix 14]
*2: [Board No. suffix 21]
*3: [Board No. suffix 22]

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| 1pc | A-1159-980-A | s | MOUNTED CIRCUIT BOARD, TG-243G (GOLD) |
| | A-1101-922-A | s | MOUNTED CIRCUIT BOARD, TG-243 (SILVER) |
| C1 | 1-126-391-11 | s | CAPACITOR ELECT 47MF/6.3V(105) |
| C2 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C3 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C4 | 1-165-884-91 | s | CAPACITOR, CERAMIC 2.2MF(1608) |
| C5 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C6 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C7 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C8 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C9 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C10 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C11 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C12 | 1-164-850-11 | s | CAPACITOR,CHIP CERAMIC 10PF/50 |
| C13 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C14 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C15 | 1-165-872-21 | s | CAPACITOR,SOLID ELECT 47MF |
| C16 | 1-165-872-21 | s | CAPACITOR,SOLID ELECT 47MF |
| C17 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C18 | 1-165-872-21 | s | CAPACITOR,SOLID ELECT 47MF |
| C19 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C20 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C21 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C22 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C23 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C24 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C25 | 1-126-395-11 | s | CAPACITOR,ELECT 22MF/16V(CHIP) |
| C26 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C27 | 1-165-884-91 | s | CAPACITOR, CERAMIC 2.2MF(1608) |
| C28 | 1-165-884-91 | s | CAPACITOR, CERAMIC 2.2MF(1608) |
| C29 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C30 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C31 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C34 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C35 | 1-126-391-11 | s | CAPACITOR ELECT 47MF/6.3V(105) |
| C36 | 1-165-884-91 | s | CAPACITOR, CERAMIC 2.2MF(1608) |
| C37 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C38 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C39 | 1-165-872-21 | s | CAPACITOR,SOLID ELECT 47MF |
| C40 | 1-165-872-21 | s | CAPACITOR,SOLID ELECT 47MF |
| C41 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C42 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C43 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C44 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C45 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C46 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C49 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C51 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C54 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C55 | 1-165-884-91 | s | CAPACITOR, CERAMIC 2.2MF(1608) |
| C56 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C57 | 1-165-872-21 | s | CAPACITOR,SOLID ELECT 47MF |
| C58 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C59 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C60 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C61 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C62 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C63 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C64 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C65 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C66 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C67 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C68 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C69 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C70 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C71 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C72 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C73 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C74 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C75 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C76 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C77 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C78 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C79 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C80 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C81 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C82 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C83 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C84 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C86 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C87 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C88 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C89 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C90 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C91 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C92 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C93 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C94 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C95 | 1-165-871-11 | s | CAPACITOR,ELECT 22MF |
| C96 | 1-165-871-11 | s | CAPACITOR,ELECT 22MF |
| C97 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C98 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C99 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C100 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C101 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C102 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C103 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C104 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C105 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C106 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C107 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C108 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C109 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C110 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C111 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C112 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C113 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C114 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C115 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C116 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C117 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C118 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C119 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C120 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |

(TG-243 BOARD (SUFFIX -14,21,22) [HDC1000/1400/1500/1550])

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C121 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C122 | 1-165-871-11 | s | CAPACITOR,ELECT 22MF |
| C123 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C124 | 1-165-871-11 | s | CAPACITOR,ELECT 22MF |
| C132 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C133 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C134 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C135 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C136 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C137 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C138 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C139 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C140 | 1-165-871-11 | s | CAPACITOR,ELECT 22MF |
| C141 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C142 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C143 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C144 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C145 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C148 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C153 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C154 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C155 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C156 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C157 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C158 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C159 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C160 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C161 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C162 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C163 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C164 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C165 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C166 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C169 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C174 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C175 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C176 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C177 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C178 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C179 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C180 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C181 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C184 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C189 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C190 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C191 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C192 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C193 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C194 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C195 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C196 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C197 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C198 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C199 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C200 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C201 | 1-165-884-91 | s | CAPACITOR, CERAMIC 2.2MF(1608) |
| C202 | 1-164-842-11 | s | CAPACITOR CERAMIC 2PF/16V 1005 |
| C205 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C206 *1 | 1-164-850-81 | s | CERAMIC CHIP 10PF 0.50PF 50V |
| *2 | 1-164-858-81 | s | CERAMIC CHIP 22PF 5.00% 50V |

(TG-243 BOARD (SUFFIX -14,21,22) [HDC1000/1400/1500/1550])

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C207 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C208 *1 | 1-125-777-81 | s | CERAMIC CHIP 0.1UF 10.00% 10V |
| C209 *1 | 1-125-777-81 | s | CERAMIC CHIP 0.1UF 10.00% 10V |
| C210 *1 | 1-125-777-81 | s | CERAMIC CHIP 0.1UF 10.00% 10V |
| CN1 | 1-778-535-31 | s | CONNECTOR, FFC/FPC(ZIF) AN 45P (GOLD) |
| | 1-778-535-11 | o | CONNECTOR, FFC (ZIF) 45P (SILVER) |
| CN2 | 1-764-080-21 | o | PIN, CONNECTOR (PC BOARD) 8P |
| CN3 | 1-770-449-21 | o | CONNECTOR, BOARD TO BOARD 70P |
| D1 | 8-719-989-03 | s | DIODE DAN222 |
| E1 | 1-535-877-22 | s | CHIP,CHECKER (TEST POINT) |
| IC1 | 6-706-482-01 | s | IC TC7SH00FU(T5RSOYJF) |
| IC2 | 6-706-482-01 | s | IC TC7SH00FU(T5RSOYJF) |
| IC3 | 8-759-669-75 | s | IC TLC2932IPWR |
| IC4 | 6-704-976-01 | s | IC ADR381ART-REEL7 |
| IC5 | 8-759-685-33 | s | IC BU2500FV-E2 |
| IC6 | 6-700-387-01 | s | IC EPC2LC20-TP |
| IC7 | 8-759-573-97 | s | IC SN74LVC541APWR |
| IC8 | 8-759-669-69 | s | IC TLC7733IPWR-12 |
| IC10 | 8-759-669-66 | s | IC TLC272CPWR |
| IC11 | 8-759-327-01 | s | IC NJM062V-TE2 |
| IC12 | 6-706-491-01 | s | IC TC7SH86FU(T5RSOYJF) |
| IC13 | 6-706-491-01 | s | IC TC7SH86FU(T5RSOYJF) |
| IC14 | 8-759-327-01 | s | IC NJM062V-TE2 |
| IC15 | 8-759-327-01 | s | IC NJM062V-TE2 |
| IC16 | 8-759-327-01 | s | IC NJM062V-TE2 |
| IC18 | 8-759-585-28 | s | IC CY62256VLL-70ZXC-T2 |
| IC19 | 8-759-327-01 | s | IC NJM062V-TE2 |
| IC20 | 6-706-358-01 | s | IC AD5424YCPZ-REEL7 |
| IC21 | 8-759-561-46 | s | IC AD8014ART-REEL7 |
| IC22 | 6-704-099-01 | s | IC TC7WZ08FK(TE85R) |
| IC23 | 6-705-673-01 | s | IC TC7PA53FU(TE85L.F) |
| IC24 | 6-705-673-01 | s | IC TC7PA53FU(TE85L.F) |
| IC25 | 8-759-561-46 | s | IC AD8014ART-REEL7 |
| IC26 | 8-759-561-46 | s | IC AD8014ART-REEL7 |
| IC27 | 6-704-099-01 | s | IC TC7WZ08FK(TE85R) |
| IC28 | 6-705-673-01 | s | IC TC7PA53FU(TE85L.F) |
| IC29 | 6-705-673-01 | s | IC TC7PA53FU(TE85L.F) |
| IC30 | 8-759-561-46 | s | IC AD8014ART-REEL7 |
| IC31 | 8-759-561-46 | s | IC AD8014ART-REEL7 |
| IC32 | 6-704-099-01 | s | IC TC7WZ08FK(TE85R) |
| IC33 | 6-705-673-01 | s | IC TC7PA53FU(TE85L.F) |
| IC34 | 6-705-673-01 | s | IC TC7PA53FU(TE85L.F) |
| IC35 | 8-759-561-46 | s | IC AD8014ART-REEL7 |
| IC36 | 8-759-561-46 | s | IC AD8014ART-REEL7 |
| IC37 | 8-759-560-62 | s | IC TC7WH32FU-TE12R |
| IC38 | 8-759-557-86 | s | IC NC7SZ86P5X |
| IC39 | 6-704-912-01 | s | IC CAT24WC256XI-TE13 |
| IC40 | 8-759-562-42 | s | IC CAT24WC08J-TE13 |
| IC41 | 8-759-669-67 | s | IC TL074CPWR-12 |
| IC42 | 8-759-561-46 | s | IC AD8014ART-REEL7 |
| IC43 | 8-759-561-46 | s | IC AD8014ART-REEL7 |
| IC44 | 8-759-592-47 | s | IC TC7SZ08FU(TE85R) |
| L1 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |
| L2 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |
| L3 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |

(TG-243 BOARD (SUFFIX -14,21,22) [HDC1000/1400/1500/1550])

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| L4 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |
| L5 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |
| L6 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |
| L7 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |
| L8 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |
| L9 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |
| L10 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |
| L12 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |
| L13 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |
| L14 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L15 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |
| L16 | 1-416-948-21 | s | COIL, CHOKE (SMD) |
| L17 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |
| Q1 | 8-729-143-13 | s | TRANSISTOR 2SC4176-B34 |
| Q2 | 8-729-143-13 | s | TRANSISTOR 2SC4176-B34 |
| Q3 | 8-729-230-27 | s | TRANSISTOR 2SA1213Y-TE12L |
| Q4 | 8-729-230-27 | s | TRANSISTOR 2SA1213Y-TE12L |
| Q5 | 8-729-143-13 | s | TRANSISTOR 2SC4176-B34 |
| Q6 | 8-729-230-27 | s | TRANSISTOR 2SA1213Y-TE12L |
| Q7 | 8-729-143-13 | s | TRANSISTOR 2SC4176-B34 |
| Q8 | 8-729-143-07 | s | TRANSISTOR 2SA1610-Y33 |
| Q9 | 8-729-230-27 | s | TRANSISTOR 2SA1213Y-TE12L |
| Q10 | 8-729-807-51 | s | TRANSISTOR 2SD1623-S |
| Q11 | 8-729-143-13 | s | TRANSISTOR 2SC4176-B34 |
| Q12 | 8-729-230-27 | s | TRANSISTOR 2SA1213Y-TE12L |
| R1 | 1-218-961-11 | s | RESISTOR, CHIP 4.7K 1/16W |
| R2 | 1-218-961-11 | s | RESISTOR, CHIP 4.7K 1/16W |
| R3 | 1-208-703-11 | s | RESISTOR,CHIP 6.8K 1/16W(1005) |
| R4 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R5 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R6 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R7 | 1-218-953-11 | s | RESISTOR, CHIP 1K 1/16W |
| R8 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R9 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R10 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R11 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R12 | 1-208-703-11 | s | RESISTOR,CHIP 6.8K 1/16W(1005) |
| R13 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R14 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R15 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R16 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R17 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R18 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R19 | 1-208-643-11 | s | RESISTOR CHIP 22 1/16W (1005) |
| R20 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R21 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R22 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R23 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R24 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R25 | 1-243-975-11 | s | RESISTOR, CHIP 4.7M |
| R26 | 1-208-687-11 | s | RESISTOR CHIP 1.5K 1/16W (1005 |
| R27 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R28 | 1-208-703-11 | s | RESISTOR,CHIP 6.8K 1/16W(1005) |
| R29 | 1-208-679-11 | s | RESISTOR CHIP 680 1/16W (1005) |
| R30 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R31 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R32 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R33 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |

(TG-243 BOARD (SUFFIX -14,21,22) [HDC1000/1400/1500/1550])

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R34 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R35 | 1-208-713-11 | s | RESISTOR CHIP 18K 1/16W (1005) |
| R36 | 1-208-709-11 | s | RESISTOR CHIP 12K 1/16W (1005) |
| R37 | 1-208-711-11 | s | RESISTOR CHIP 15K 1/16W (1005) |
| R38 | 1-208-691-11 | s | RESISTOR CHIP 2.2K 1/16W(1005) |
| R39 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R40 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R41 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R42 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R43 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R44 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R45 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R46 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R47 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R59 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R60 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R61 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R62 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R63 | 1-208-893-11 | s | RESISTOR, CHIP 1.8K (1005) |
| R64 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R65 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R66 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R67 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R69 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R70 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R71 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R73 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R74 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R76 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R77 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R79 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R81 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R83 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R84 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R85 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R86 | 1-208-643-11 | s | RESISTOR CHIP 22 1/16W (1005) |
| R87 *2 | 1-208-931-81 | s | METAL CHIP 68K 0.5% 1/16W |
| R88 *2 | 1-208-931-81 | s | METAL CHIP 68K 0.5% 1/16W |
| R99 | 1-208-643-11 | s | RESISTOR CHIP 22 1/16W (1005) |
| R120 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R121 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R122 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R123 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R124 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R125 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R126 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R127 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R128 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R129 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R130 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R131 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R132 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R133 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R134 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R135 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R136 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R137 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R138 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R139*1*2 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |

(TG-243 BOARD (SUFFIX -14,21,22) [HDC1000/1400/1500/1550])

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R140 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R141 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R142 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R143 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R144 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R145 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R146 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R147 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R148 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R149 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R150 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R151 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R153 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R155 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R156 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R157 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R158 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R159 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R160 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R161 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R162 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R163 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R164 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R165 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R166 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R167 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R168 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R169 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R170 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R171 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R172 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R173 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R174 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R175 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R176 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R177 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R178 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R179 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R180 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R181 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R182 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R183 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R184 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R185 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R190 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R196 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R197 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R198 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R202 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R203 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R204 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R205 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R206 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R207 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R208 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R209 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R210 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R212 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R213 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |

(TG-243 BOARD (SUFFIX -14,21,22) [HDC1000/1400/1500/1550])

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R214 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R215 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R216 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R220 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R222 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R223 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R224 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R225 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R227 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R228 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R229 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R230 | 1-208-691-11 | s | RESISTOR CHIP 2.2K 1/16W(1005) |
| R231 | 1-208-691-11 | s | RESISTOR CHIP 2.2K 1/16W(1005) |
| R232 | 1-208-691-11 | s | RESISTOR CHIP 2.2K 1/16W(1005) |
| R233 | 1-208-675-11 | s | RESISTOR CHIP 470 1/16W (1005) |
| R234 | 1-208-675-11 | s | RESISTOR CHIP 470 1/16W (1005) |
| R235 | 1-208-675-11 | s | RESISTOR CHIP 470 1/16W (1005) |
| R236 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R237 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R238 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R242 | 1-208-860-11 | s | RESISTOR CHIP 75 1/16W (1005) |
| R243 | 1-208-647-11 | s | RESISTOR CHIP 33 1/16W (1005) |
| R244 | 1-208-647-11 | s | RESISTOR CHIP 33 1/16W (1005) |
| R245 | 1-208-647-11 | s | RESISTOR CHIP 33 1/16W (1005) |
| R246 | 1-208-923-11 | s | RESISTOR, CHIP 33K (1005) |
| R247 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R248 | 1-208-679-11 | s | RESISTOR CHIP 680 1/16W (1005) |
| R249 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R250 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R251 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R252 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R253 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R254 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R255 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R258 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R259 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R264 | 1-208-711-11 | s | RESISTOR CHIP 15K 1/16W (1005) |
| R265 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R266 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R267 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R268 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R269 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R270 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R271 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R272 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R273 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R274 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R275 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R276 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R277 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R278 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R279 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R280 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R281 | 1-208-643-11 | s | RESISTOR CHIP 22 1/16W (1005) |
| R282 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R283 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R284 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R285 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R286 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |

(TG-243 BOARD (SUFFIX -14,21,22) [HDC1000/1400/1500/1550])

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R288 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R289 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R292 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R293 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R298 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R299 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R300 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R301 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R302 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R303 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R304 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R305 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R306 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R307 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R308 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R309 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R310 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R311 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R312 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R313 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R314 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R315 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R318 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R319 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R324 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R325 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R326 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R327 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R328 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R329 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R330 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R331 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R332 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R333 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R334 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R335 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R336 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R337 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R338 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R339 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R340 | 1-216-864-11 | s | CONDUCTOR, CHIP (1608) |
| R342 | 1-216-864-11 | s | CONDUCTOR, CHIP (1608) |
| R343 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R344 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R345 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R346 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R347 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R348 | 1-208-691-11 | s | RESISTOR CHIP 2.2K 1/16W(1005) |
| R349 | 1-208-691-11 | s | RESISTOR CHIP 2.2K 1/16W(1005) |
| R350 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R352 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R353 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R355 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R356 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R358 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R360 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R362 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R363 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R365 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |

(TG-243 BOARD (SUFFIX -14,21,22) [HDC1000/1400/1500/1550])

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R367 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R369 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R371 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R373 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R375 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R376 *1 | 1-208-635-11 | s | METAL CHIP 10 0.5% 1/16W |
| *2 | 1-218-941-11 | s | METAL CHIP 100 0.5% 1/16W |
| R377 | 1-208-691-11 | s | RESISTOR CHIP 2.2K 1/16W(1005) |
| R379 | 1-208-691-11 | s | RESISTOR CHIP 2.2K 1/16W(1005) |
| R381 | 1-208-691-11 | s | RESISTOR CHIP 2.2K 1/16W(1005) |
| R382 | 1-215-465-00 | s | RESISTOR,METAL FILM 68K 1/4W |
| R383 | 1-215-465-00 | s | RESISTOR,METAL FILM 68K 1/4W |
| RB1 | 1-234-370-11 | s | RES, NETWORK 22X4 (1005) |
| S1 | 1-771-709-31 | s | SWITCH, SLIDE |
| X1 | 1-813-529-11 | s | OSCILLATOR, CRYSTAL (VCXO) 3.3 |
| X2 | 1-813-530-11 | s | OSCILLATOR, CRYSTAL (VCXO) 3.3 |

---

TG-243 BOARD (SUFFIX 23-)

*A: [TG-243 for HDC1000/1500/1550]
*B: [TG-243G for HDC1000/1400/1450/1500/1550]

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| 1pc *B | A-1159-980-B | s | MOUNTED CIRCUIT BOARD, TG-243G (GOLD) |
| *A | A-1101-922-A | s | MOUNTED CIRCUIT BOARD, TG-243 (SILVER) |
| C1 | 1-126-391-21 | s | CAP, CHIP ELECT 47MF (5X5.7) |
| C2 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C3 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C4 | 1-165-884-91 | s | CAP, CERAMIC 2.2MF (1608) |
| C5 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C6 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C7 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C8 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C9 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C10 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C11 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C12 | 1-164-850-81 | s | CAP, CHIP CERAMIC 10PF CH 1005 |
| C13 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C14 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C15 | 1-165-872-21 | s | CAP, ELECT 47MF (5.0X6.5) |
| C16 | 1-165-872-21 | s | CAP, ELECT 47MF (5.0X6.5) |
| C17 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C18 | 1-165-872-21 | s | CAP, ELECT 47MF (5.0X6.5) |
| C19 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C20 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C21 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C22 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C23 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C24 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C25 | 1-126-395-21 | s | CAP, CHIP ELECT 22MF (5X5.7) |
| C26 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C27 | 1-165-884-91 | s | CAP, CERAMIC 2.2MF (1608) |
| C28 | 1-165-884-91 | s | CAP, CERAMIC 2.2MF (1608) |
| C29 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C30 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C31 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C34 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C35 | 1-126-391-21 | s | CAP, CHIP ELECT 47MF (5X5.7) |
| C36 | 1-165-884-91 | s | CAP, CERAMIC 2.2MF (1608) |
| C37 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C38 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C39 | 1-165-872-21 | s | CAP, ELECT 47MF (5.0X6.5) |
| C40 | 1-165-872-21 | s | CAP, ELECT 47MF (5.0X6.5) |
| C41 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C42 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C43 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C44 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C45 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C46 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C49 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C51 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C54 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C55 | 1-165-884-91 | s | CAP, CERAMIC 2.2MF (1608) |
| C56 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C57 | 1-165-872-21 | s | CAP, ELECT 47MF (5.0X6.5) |
| C58 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C59 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |

(TG-243 BOARD (SUFFIX 23-))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C60 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C61 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C62 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C63 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C64 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C65 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C66 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C67 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C68 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C69 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C70 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C71 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C72 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C73 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C74 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C75 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C76 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C77 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C78 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C79 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C80 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C81 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C82 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C83 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C84 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C86 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C87 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C88 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C89 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C90 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C91 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C92 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C93 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C94 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C95 | 1-165-871-21 | s | CAP, ELECT 22MF (4.0X5.5) |
| C96 | 1-165-871-21 | s | CAP, ELECT 22MF (4.0X5.5) |
| C97 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C98 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C99 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C100 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C101 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C102 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C103 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C104 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C105 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C106 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C107 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C108 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C109 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C110 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C111 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C112 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C113 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C114 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C115 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C116 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C117 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C118 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C119 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |

(TG-243 BOARD (SUFFIX 23-))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C120 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C121 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C122 | 1-165-871-21 | s | CAP, ELECT 22MF (4.0X5.5) |
| C123 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C124 | 1-165-871-21 | s | CAP, ELECT 22MF (4.0X5.5) |
| C132 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C133 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C134 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C135 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C136 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C137 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C138 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C139 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C140 | 1-165-871-21 | s | CAP, ELECT 22MF (4.0X5.5) |
| C141 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C142 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C143 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C144 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C145 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C148 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C153 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C154 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C155 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C156 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C157 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C158 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C159 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C160 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C161 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C162 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C163 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C164 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C165 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C166 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C169 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C174 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C175 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C176 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C177 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C178 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C179 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C180 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C181 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C184 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C189 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C190 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C191 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C192 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C193 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C194 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C195 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C196 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C197 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C198 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C199 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C200 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C201 | 1-165-884-91 | s | CAP, CERAMIC 2.2MF (1608) |
| C202 | 1-164-842-81 | s | CAP,CHIP CERAMIC 2.0PF CK 1005 |
| C205 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |

(TG-243 BOARD (SUFFIX 23-))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C206 | 1-164-858-81 | s | CAP, CHIP CERAMIC 22PF CH 1005 |
| C207 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| CN1 *B | 1-778-535-31 | s | CONNECTOR, FFC/FPC(ZIF) AN 45P (GOLD) |
| *A | 1-778-535-21 | o | CONNECTOR, FFC(ZIF) 45P (SILVER) |
| CN2 | 1-764-080-21 | o | PIN, CONNECTOR (PC BOARD) 8P |
| CN3 | 1-770-449-21 | s | CONNECTOR, BOARD T1 BOARD 70P |
| D1 | 8-719-989-04 | s | DIODE DAN222-TL |
| E1 | 1-535-877-22 | s | CHIP, CHECKER |
| IC1 | 6-706-482-01 | s | IC TC7SH00FU(T5RSOYJF) |
| IC2 | 6-706-482-01 | s | IC TC7SH00FU(T5RSOYJF) |
| IC3 | 6-709-647-01 | s | IC TLC2932AIPWR |
| IC4 | 6-704-976-01 | s | IC ADR381ARTZ-REEL7 |
| IC5 | 8-759-685-34 | s | IC M62352AGP-D60Q |
| IC6 | 6-700-387-01 | s | IC EPC2LC20N-TP |
| IC7 | 8-759-573-97 | s | IC SN74LVC541APWR |
| IC8 | 6-704-571-01 | s | IC TLC7703IPWR |
| IC10 | 8-759-669-66 | s | IC TLC272CPWR-12 |
| IC11 | 8-759-327-01 | s | IC NJM062V(TE2) |
| IC12 | 6-706-491-01 | s | IC TC7SH86FU(T5RSOYJF) |
| IC13 | 6-706-491-01 | s | IC TC7SH86FU(T5RSOYJF) |
| IC14 | 8-759-327-01 | s | IC NJM062V(TE2) |
| IC15 | 8-759-327-01 | s | IC NJM062V(TE2) |
| IC16 | 8-759-327-01 | s | IC NJM062V(TE2) |
| IC18 | 6-711-696-01 | s | IC CY62256VNLL-70ZXCT |
| IC19 | 8-759-327-01 | s | IC NJM062V(TE2) |
| IC20 | 6-706-358-01 | s | IC AD5424YCPZ-REEL7 |
| IC21 | 8-759-561-46 | s | IC AD8014ARTZ-REEL7 |
| IC22 | 6-704-099-01 | s | IC TC7WZ08FK(TE85R) |
| IC23 | 6-705-673-01 | s | IC TC7PA53FU(TE85L.F) |
| IC24 | 6-705-673-01 | s | IC TC7PA53FU(TE85L.F) |
| IC25 | 8-759-561-46 | s | IC AD8014ARTZ-REEL7 |
| IC26 | 8-759-561-46 | s | IC AD8014ARTZ-REEL7 |
| IC27 | 6-704-099-01 | s | IC TC7WZ08FK(TE85R) |
| IC28 | 6-705-673-01 | s | IC TC7PA53FU(TE85L.F) |
| IC29 | 6-705-673-01 | s | IC TC7PA53FU(TE85L.F) |
| IC30 | 8-759-561-46 | s | IC AD8014ARTZ-REEL7 |
| IC31 | 8-759-561-46 | s | IC AD8014ARTZ-REEL7 |
| IC32 | 6-704-099-01 | s | IC TC7WZ08FK(TE85R) |
| IC33 | 6-705-673-01 | s | IC TC7PA53FU(TE85L.F) |
| IC34 | 6-705-673-01 | s | IC TC7PA53FU(TE85L.F) |
| IC35 | 8-759-561-46 | s | IC AD8014ARTZ-REEL7 |
| IC36 | 8-759-561-46 | s | IC AD8014ARTZ-REEL7 |
| IC37 | 8-759-560-62 | s | IC TC7WH32FU(TE12R) |
| IC38 | 8-759-557-86 | s | IC NC7SZ86P5X |
| IC39 | 6-710-022-01 | s | IC CAT24C256XI-GT3 |
| IC40 | 6-710-020-01 | s | IC CAT24C08WI-GT3 |
| IC41 | 8-759-669-67 | s | IC TL074CPWR-12 |
| IC42 | 8-759-669-67 | s | IC TL074CPWR-12 |
| IC43 | 8-759-561-46 | s | IC AD8014ARTZ-REEL7 |
| IC44 | 8-759-592-47 | s | IC TC7SZ08FU(TE85R) |
| L1 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L2 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L3 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L4 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L5 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |

(TG-243 BOARD (SUFFIX 23-))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| L6 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L7 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L8 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L9 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L10 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L12 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L13 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L14 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L15 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L16 | 1-416-948-21 | s | COIL, CHOKE 10UH |
| L17 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| Q1 | 8-729-144-81 | s | TRANSISTOR 2SC4176T1B33B34B35 |
| Q2 | 8-729-144-81 | s | TRANSISTOR 2SC4176T1B33B34B35 |
| Q3 | 8-729-209-73 | s | TRANSISTOR 2SA1213Y-TE12L |
| Q4 | 8-729-209-73 | s | TRANSISTOR 2SA1213Y-TE12L |
| Q5 | 8-729-144-81 | s | TRANSISTOR 2SC4176T1B33B34B35 |
| Q6 | 8-729-209-73 | s | TRANSISTOR 2SA1213Y-TE12L |
| Q7 | 8-729-144-81 | s | TRANSISTOR 2SC4176T1B33B34B35 |
| Q8 | 8-729-140-86 | s | TRANSISTOR 2SA1610-T1Y34 |
| Q9 | 8-729-209-73 | s | TRANSISTOR 2SA1213Y-TE12L |
| Q10 | 8-729-209-77 | s | TRANSISTOR 2SC2873Y-TE12L |
| Q11 | 8-729-144-81 | s | TRANSISTOR 2SC4176T1B33B34B35 |
| Q12 | 8-729-209-73 | s | TRANSISTOR 2SA1213Y-TE12L |
| R1 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R2 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R3 | 1-208-907-81 | s | RES, CHIP 6.8K (1005) |
| R4 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R5 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R6 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R7 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R8 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R9 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R10 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R11 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R12 | 1-208-907-81 | s | RES, CHIP 6.8K (1005) |
| R13 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R14 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R15 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R16 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R17 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R18 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R19 | 1-220-878-81 | s | RES, CHIP 22 (1005) |
| R20 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R21 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R22 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R23 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R24 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R25 | 1-243-975-81 | s | RES, CHIP 4.7M (1005) |
| R26 | 1-208-891-81 | s | RES, CHIP 1.5K (1005) |
| R27 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R28 | 1-208-907-81 | s | RES, CHIP 6.8K (1005) |
| R29 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R30 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R31 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R32 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R33 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R34 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R35 | 1-208-911-81 | s | RES, CHIP 10K (1005) |

(TG-243 BOARD (SUFFIX 23-))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R36 | 1-208-913-81 | s | RES, CHIP 12K (1005) |
| R37 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R38 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R39 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R40 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R41 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R42 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R43 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R44 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R45 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R46 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R47 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R59 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R60 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R61 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R62 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R63 | 1-208-893-81 | s | RES, CHIP 1.8K (1005) |
| R64 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R65 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R66 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R67 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R69 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R70 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R71 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R73 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R74 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R76 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R77 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R78 *B | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R79 *A | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R81 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R83 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R84 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R85 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R86 | 1-220-878-81 | s | RES, CHIP 22 (1005) |
| R87 | 1-208-931-81 | s | RES, CHIP 68K (1005) |
| R88 | 1-208-931-81 | s | RES, CHIP 68K (1005) |
| R99 | 1-220-878-81 | s | RES, CHIP 22 (1005) |
| R120 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R121 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R122 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R123 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R124 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R125 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R126 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R127 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R128 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R129 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R130 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R131 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R132 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R133 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R134 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R135 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R136 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R137 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R138 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R140 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R141 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |

(TG-243 BOARD (SUFFIX 23-))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R142 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R143 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R144 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R145 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R146 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R147 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R148 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R149 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R150 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R151 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R153 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R155 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R156 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R157 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R158 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R159 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R160 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R161 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R162 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R163 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R164 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R165 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R166 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R167 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R168 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R169 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R170 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R171 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R172 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R173 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R174 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R175 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R176 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R177 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R178 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R179 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R180 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R181 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R182 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R183 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R184 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R185 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R190 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R196 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R197 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R198 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R202 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R203 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R204 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R205 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R206 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R207 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R208 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R209 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R210 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R212 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R213 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R214 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R215 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |

(TG-243 BOARD (SUFFIX 23-))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R216 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R220 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R222 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R223 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R224 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R225 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R227 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R228 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R229 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R230 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R231 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R232 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R233 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R234 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R235 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R236 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R237 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R238 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R239 | 1-220-882-81 | s | RES, CHIP 33 (1005) |
| R240 | 1-220-882-81 | s | RES, CHIP 33 (1005) |
| R241 | 1-220-882-81 | s | RES, CHIP 33 (1005) |
| R242 | 1-208-860-81 | s | RES, CHIP 75 (1005) |
| R243 | 1-220-882-81 | s | RES, CHIP 33 (1005) |
| R244 | 1-220-882-81 | s | RES, CHIP 33 (1005) |
| R245 | 1-220-882-81 | s | RES, CHIP 33 (1005) |
| R246 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R247 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R248 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R249 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R250 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R251 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R252 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R253 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R254 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R255 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R258 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R259 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R264 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R265 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R266 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R267 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R268 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R269 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R270 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R271 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R272 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R273 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R274 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R275 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R276 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R277 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R278 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R279 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R280 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R281 | 1-220-878-81 | s | RES, CHIP 22 (1005) |
| R282 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R283 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R284 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R285 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |

(TG-243 BOARD (SUFFIX 23-))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R286 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R288 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R289 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R292 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R293 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R298 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R299 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R300 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R301 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R302 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R303 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R304 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R305 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R306 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R307 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R308 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R309 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R310 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R311 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R312 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R313 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R314 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R315 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R318 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R319 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R324 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R325 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R326 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R327 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R328 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R329 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R330 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R331 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R332 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R333 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R334 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R335 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R336 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R337 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R338 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R339 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R340 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| R342 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| R343 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R344 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R345 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R346 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R347 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R348 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R349 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R350 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R352 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R353 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R355 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R356 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R358 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R360 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R362 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R363 | 1-208-863-81 | s | RES, CHIP 100 (1005) |

(TG-243 BOARD (SUFFIX 23-))

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R365 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R367 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R369 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R371 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R373 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R375 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R376 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R377 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R379 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R381 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R383 *A | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R385 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R387 *A | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R389 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R391 *A | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R393 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| RB1 | 1-234-370-21 | s | RES, NETWORK 22 (1005X4) |
| S1 | 1-771-709-41 | s | SWITCH, SLIDE |
| X1 | 1-813-529-11 | s | OSCILLATOR, CRYSTAL (VCXO) 3.3 |
| X2 | 1-813-530-11 | s | OSCILLATOR, CRYSTAL (VCXO) 3.3 |

TG-243BG BOARD (SUFFIX -22) [HDC1400(UC)]

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| 1pc | ⚠ A-1271-237-A | s | MOUNTED CIRCUIT BOARD, TG-243BG |
| C1 | 1-126-391-21 | s | CAP, CHIP ELECT 47MF (5X5.7) |
| C2 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C3 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C4 | 1-165-884-91 | s | CAP, CERAMIC 2.2MF (1608) |
| C5 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C6 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C7 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C8 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C9 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C10 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C11 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C12 | 1-164-850-81 | s | CAP, CHIP CERAMIC 10PF CH 1005 |
| C13 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C14 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C15 | 1-165-872-21 | s | CAP, ELECT 47MF (5.0X6.5) |
| C16 | 1-165-872-21 | s | CAP, ELECT 47MF (5.0X6.5) |
| C17 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C18 | 1-165-872-21 | s | CAP, ELECT 47MF (5.0X6.5) |
| C19 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C20 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C21 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C22 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C23 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C24 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C25 | 1-126-395-21 | s | CAP, CHIP ELECT 22MF (5X5.7) |
| C26 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C27 | 1-165-884-91 | s | CAP, CERAMIC 2.2MF (1608) |
| C28 | 1-165-884-91 | s | CAP, CERAMIC 2.2MF (1608) |
| C29 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C30 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C31 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C34 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C35 | 1-126-391-21 | s | CAP, CHIP ELECT 47MF (5X5.7) |
| C36 | 1-165-884-91 | s | CAP, CERAMIC 2.2MF (1608) |
| C37 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C39 | 1-165-872-21 | s | CAP, ELECT 47MF (5.0X6.5) |
| C40 | 1-165-872-21 | s | CAP, ELECT 47MF (5.0X6.5) |
| C41 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C43 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C44 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C45 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C46 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C49 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C51 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C54 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C55 | 1-165-884-91 | s | CAP, CERAMIC 2.2MF (1608) |
| C56 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C57 | 1-165-872-21 | s | CAP, ELECT 47MF (5.0X6.5) |
| C58 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C59 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C60 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C61 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C62 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C63 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C64 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C65 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C66 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |

(TG-243BG BOARD (SUFFIX -22) [HDC1400(UC)])

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C67 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C68 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C69 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C70 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C71 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C72 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C73 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C74 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C75 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C76 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C77 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C78 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C79 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C80 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C81 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C82 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C83 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C84 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C86 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C87 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C88 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C89 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C90 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C91 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C92 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C93 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C94 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C95 | 1-165-871-21 | s | CAP, ELECT 22MF (4.0X5.5) |
| C96 | 1-165-871-21 | s | CAP, ELECT 22MF (4.0X5.5) |
| C97 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C98 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C99 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C100 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C101 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C102 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C103 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C104 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C105 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C106 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C107 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C108 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C109 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C110 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C111 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C112 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C113 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C114 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C115 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C116 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C117 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C118 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C119 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C120 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C121 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C122 | 1-165-871-21 | s | CAP, ELECT 22MF (4.0X5.5) |
| C123 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C124 | 1-165-871-21 | s | CAP, ELECT 22MF (4.0X5.5) |
| C132 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C133 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |

(TG-243BG BOARD (SUFFIX -22) [HDC1400(UC)])

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C134 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C135 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C136 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C137 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C138 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C139 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C140 | 1-165-871-21 | s | CAP, ELECT 22MF (4.0X5.5) |
| C141 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C142 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C143 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C144 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C145 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C148 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C153 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C154 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C155 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C156 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C157 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C158 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C159 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C160 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C161 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C162 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C163 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C164 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C165 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C166 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C169 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C174 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C175 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C176 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C177 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C178 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C179 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C180 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C181 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C184 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C189 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C190 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C191 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C192 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C193 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C194 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C195 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C196 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C197 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C198 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C199 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C200 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C201 | 1-165-884-91 | s | CAP, CERAMIC 2.2MF (1608) |
| C202 | 1-164-842-81 | s | CAP,CHIP CERAMIC 2.0PF CK 1005 |
| C205 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C206 | 1-164-858-81 | s | CAP, CHIP CERAMIC 22PF CH 1005 |
| C207 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| CN1 | 1-778-535-31 | s | CONNECTOR, FFC/FPC(ZIF) AN 45P |
| CN2 | 1-764-080-21 | o | PIN, CONNECTOR (PC BOARD) 8P |
| CN3 | 1-770-449-21 | o | CONNECTOR, BOARD T1 BOARD 70P |
| D1 | 8-719-989-04 | s | DIODE DAN222-TL |

(TG-243BG BOARD (SUFFIX -22) [HDC1400(UC)])

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| E1 | 1-535-877-22 | s | CHIP, CHECKER |
| IC1 | 6-706-482-01 | s | IC TC7SH00FU(T5RSOYJF) |
| IC2 | 6-706-482-01 | s | IC TC7SH00FU(T5RSOYJF) |
| IC3 | 8-759-669-75 | s | IC TLC2932IPWRG4 |
| IC4 | 6-704-976-01 | s | IC ADR381ARTZ-REEL7 |
| IC5 | 8-759-685-34 | s | IC M62352AGP-D60Q |
| IC6 | 6-700-387-01 | s | IC EPC2LC20N-TP |
| IC7 | 8-759-573-97 | s | IC SN74LVC541APWR |
| IC8 | 8-759-669-69 | s | IC TLC7733IPWR-12 |
| IC10 | 8-759-669-66 | s | IC TLC272CPWR-12 |
| IC11 | 8-759-327-01 | s | IC NJM062V(TE2) |
| IC12 | 6-706-491-01 | s | IC TC7SH86FU(T5RSOYJF) |
| IC13 | 6-706-491-01 | s | IC TC7SH86FU(T5RSOYJF) |
| IC14 | 8-759-327-01 | s | IC NJM062V(TE2) |
| IC15 | 8-759-327-01 | s | IC NJM062V(TE2) |
| IC16 | 8-759-327-01 | s | IC NJM062V(TE2) |
| IC18 | 8-759-585-28 | s | IC CY62256VLL-70ZXC-T2 |
| IC19 | 8-759-327-01 | s | IC NJM062V(TE2) |
| IC20 | 6-706-358-01 | s | IC AD5424YCPZ-REEL7 |
| IC21 | 8-759-561-46 | s | IC AD8014ARTZ-REEL7 |
| IC22 | 6-704-099-01 | s | IC TC7WZ08FK(TE85R) |
| IC23 | 6-705-673-01 | s | IC TC7PA53FU(TE85L.F) |
| IC24 | 6-705-673-01 | s | IC TC7PA53FU(TE85L.F) |
| IC25 | 8-759-561-46 | s | IC AD8014ARTZ-REEL7 |
| IC26 | 8-759-561-46 | s | IC AD8014ARTZ-REEL7 |
| IC27 | 6-704-099-01 | s | IC TC7WZ08FK(TE85R) |
| IC28 | 6-705-673-01 | s | IC TC7PA53FU(TE85L.F) |
| IC29 | 6-705-673-01 | s | IC TC7PA53FU(TE85L.F) |
| IC30 | 8-759-561-46 | s | IC AD8014ARTZ-REEL7 |
| IC31 | 8-759-561-46 | s | IC AD8014ARTZ-REEL7 |
| IC32 | 6-704-099-01 | s | IC TC7WZ08FK(TE85R) |
| IC33 | 6-705-673-01 | s | IC TC7PA53FU(TE85L.F) |
| IC34 | 6-705-673-01 | s | IC TC7PA53FU(TE85L.F) |
| IC35 | 8-759-561-46 | s | IC AD8014ARTZ-REEL7 |
| IC36 | 8-759-561-46 | s | IC AD8014ARTZ-REEL7 |
| IC37 | 8-759-560-62 | s | IC TC7WH32FU(TE12R) |
| IC38 | 8-759-557-86 | s | IC NC7SZ86P5X |
| IC39 | 6-710-022-01 | s | IC CAT24C256XI-GT3 |
| IC40 | 6-710-020-01 | s | IC CAT24C08WI-GT3 |
| IC41 | 8-759-669-67 | s | IC TL074CPWR-12 |
| IC42 | 8-759-561-46 | s | IC AD8014ARTZ-REEL7 |
| IC43 | 8-759-561-46 | s | IC AD8014ARTZ-REEL7 |
| IC44 | 8-759-592-47 | s | IC TC7SZ08FU(TE85R) |
| L1 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L2 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L3 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L4 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L5 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L6 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L7 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L8 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L9 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L10 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L12 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L13 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L14 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L15 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L16 | 1-416-948-21 | s | COIL, CHOKE 10UH |

(TG-243BG BOARD (SUFFIX -22) [HDC1400(UC)])

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| L17 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| Q1 | 8-729-144-81 | s | TRANSISTOR 2SC4176T1B33B34B35 |
| Q2 | 8-729-144-81 | s | TRANSISTOR 2SC4176T1B33B34B35 |
| Q3 | 8-729-209-73 | s | TRANSISTOR 2SA1213Y-TE12L |
| Q4 | 8-729-209-73 | s | TRANSISTOR 2SA1213Y-TE12L |
| Q5 | 8-729-144-81 | s | TRANSISTOR 2SC4176T1B33B34B35 |
| Q6 | 8-729-209-73 | s | TRANSISTOR 2SA1213Y-TE12L |
| Q7 | 8-729-144-81 | s | TRANSISTOR 2SC4176T1B33B34B35 |
| Q8 | 8-729-140-86 | s | TRANSISTOR 2SA1610-T1Y34 |
| Q9 | 8-729-209-73 | s | TRANSISTOR 2SA1213Y-TE12L |
| Q10 | 8-729-209-77 | s | TRANSISTOR 2SC2873Y-TE12L |
| Q11 | 8-729-144-81 | s | TRANSISTOR 2SC4176T1B33B34B35 |
| Q12 | 8-729-209-73 | s | TRANSISTOR 2SA1213Y-TE12L |
| R1 | 1-218-961-81 | s | RES, CHIP 4.7K |
| R2 | 1-218-961-81 | s | RES, CHIP 4.7K |
| R3 | 1-208-907-81 | s | RES, CHIP 6.8K (1005) |
| R4 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R5 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R6 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R7 | 1-218-953-81 | s | RES, CHIP 1.0K |
| R8 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R9 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R10 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R11 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R12 | 1-208-907-81 | s | RES, CHIP 6.8K (1005) |
| R13 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R14 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R15 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R16 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R17 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R18 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R19 | 1-220-878-81 | s | RES, CHIP 22 (1005) |
| R20 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R21 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R22 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R23 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R24 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R25 | 1-243-975-81 | s | RES, CHIP 4.7M (1005) |
| R26 | 1-208-891-81 | s | RES, CHIP 1.5K (1005) |
| R27 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R28 | 1-208-907-81 | s | RES, CHIP 6.8K (1005) |
| R29 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R30 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R31 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R32 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R33 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R34 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R35 | 1-208-917-81 | s | RES, CHIP 18K (1005) |
| R36 | 1-208-913-81 | s | RES, CHIP 12K (1005) |
| R37 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R38 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R39 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R41 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R42 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R43 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R44 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R45 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R46 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |

(TG-243BG BOARD (SUFFIX -22) [HDC1400(UC)])

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R47 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R59 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R60 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R61 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R62 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R63 | 1-208-893-81 | s | RES, CHIP 1.8K (1005) |
| R64 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R65 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R66 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R67 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R68 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R70 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R71 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R73 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R74 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R76 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R77 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R78 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R81 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R83 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R84 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R85 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R86 | 1-220-878-81 | s | RES, CHIP 22 (1005) |
| R87 | 1-208-931-81 | s | RES, CHIP 68K (1005) |
| R88 | 1-208-931-81 | s | RES, CHIP 68K (1005) |
| R99 | 1-220-878-81 | s | RES, CHIP 22 (1005) |
| R120 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R121 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R122 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R123 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R124 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R125 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R126 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R127 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R128 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R129 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R130 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R131 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R132 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R133 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R134 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R135 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R136 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R137 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R138 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R140 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R141 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R142 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R143 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R144 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R145 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R146 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R147 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R148 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R149 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R150 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R151 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R153 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R155 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |

(TG-243BG BOARD (SUFFIX -22) [HDC1400(UC)])

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R156 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R157 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R158 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R159 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R160 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R161 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R162 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R163 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R164 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R165 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R166 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R167 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R168 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R169 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R170 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R171 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R172 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R173 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R174 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R175 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R176 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R177 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R178 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R179 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R180 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R181 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R182 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R183 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R184 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R185 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R190 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R196 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R197 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R198 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R202 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R203 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R204 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R205 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R206 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R207 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R208 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R209 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R210 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R212 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R213 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R214 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R215 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R216 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R220 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R222 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R223 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R224 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R225 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R227 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R228 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R229 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R230 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R231 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R232 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |

(TG-243BG BOARD (SUFFIX -22) [HDC1400(UC)])

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R233 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R234 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R235 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R236 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R237 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R238 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R242 | 1-208-860-81 | s | RES, CHIP 75 (1005) |
| R243 | 1-220-882-81 | s | RES, CHIP 33 (1005) |
| R244 | 1-220-882-81 | s | RES, CHIP 33 (1005) |
| R245 | 1-220-882-81 | s | RES, CHIP 33 (1005) |
| R246 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R247 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R248 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R249 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R250 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R251 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R252 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R253 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R254 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R255 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R258 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R259 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R264 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R265 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R266 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R267 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R268 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R269 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R270 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R271 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R272 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R273 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R274 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R275 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R276 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R277 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R278 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R279 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R280 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R281 | 1-220-878-81 | s | RES, CHIP 22 (1005) |
| R282 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R283 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R284 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R285 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R286 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R288 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R289 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R292 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R293 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R298 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R299 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R300 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R301 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R302 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R303 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R304 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R305 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R306 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R307 | 1-208-863-81 | s | RES, CHIP 100 (1005) |

(TG-243BG BOARD (SUFFIX -22) [HDC1400(UC)])

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R308 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R309 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R310 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R311 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R312 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R313 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R314 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R315 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R318 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R319 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R324 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R325 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R326 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R327 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R328 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R329 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R330 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R331 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R332 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R333 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R334 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R335 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R336 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R337 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R338 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R339 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R340 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| R342 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| R343 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R344 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R345 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R346 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R347 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R348 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R349 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R350 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R352 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R353 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R355 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R356 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R358 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R360 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R362 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R363 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R365 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R367 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R369 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R371 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R373 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R375 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R376 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R377 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R379 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R381 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| RB1 | 1-234-370-21 | s | RES, NETWORK 22 (1005X4) |
| S1 | 1-771-709-41 | s | SWITCH, SLIDE |
| X1 | 1-813-529-11 | s | OSCILLATOR, CRYSTAL (VCXO) 3.3 |

TG-243BG BOARD (SUFFIX 23-) [HDC1400(UC,CE)]

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| 1pc | A-1271-237-A | s | MOUNTED CIRCUIT BOARD, TG-243BG |
| C1 | 1-126-391-21 | s | CAP, CHIP ELECT 47MF (5X5.7) |
| C2 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C3 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C4 | 1-165-884-91 | s | CAP, CERAMIC 2.2MF (1608) |
| C5 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C6 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C7 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C8 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C9 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C10 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C11 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C12 | 1-164-850-81 | s | CAP, CHIP CERAMIC 10PF CH 1005 |
| C13 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C14 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C15 | 1-165-872-21 | s | CAP, ELECT 47MF (5.0X6.5) |
| C16 | 1-165-872-21 | s | CAP, ELECT 47MF (5.0X6.5) |
| C17 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C18 | 1-165-872-21 | s | CAP, ELECT 47MF (5.0X6.5) |
| C19 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C20 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C21 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C22 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C23 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C24 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C25 | 1-126-395-21 | s | CAP, CHIP ELECT 22MF (5X5.7) |
| C26 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C27 | 1-165-884-91 | s | CAP, CERAMIC 2.2MF (1608) |
| C28 | 1-165-884-91 | s | CAP, CERAMIC 2.2MF (1608) |
| C29 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C30 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C31 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C34 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C35 | 1-126-391-21 | s | CAP, CHIP ELECT 47MF (5X5.7) |
| C36 | 1-165-884-91 | s | CAP, CERAMIC 2.2MF (1608) |
| C37 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C39 | 1-165-872-21 | s | CAP, ELECT 47MF (5.0X6.5) |
| C40 | 1-165-872-21 | s | CAP, ELECT 47MF (5.0X6.5) |
| C41 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C43 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C44 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C45 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C46 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C49 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C51 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C54 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C55 | 1-165-884-91 | s | CAP, CERAMIC 2.2MF (1608) |
| C56 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C57 | 1-165-872-21 | s | CAP, ELECT 47MF (5.0X6.5) |
| C58 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C59 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C60 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C61 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C62 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C63 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C64 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C65 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C66 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |

(TG-243BG BOARD (SUFFIX 23-) [HDC1400(UC,CE)])

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C67 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C68 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C69 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C70 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C71 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C72 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C73 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C74 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C75 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C76 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C77 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C78 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C79 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C80 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C81 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C82 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C83 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C84 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C86 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C87 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C88 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C89 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C90 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C91 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C92 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C93 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C94 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C95 | 1-165-871-21 | s | CAP, ELECT 22MF (4.0X5.5) |
| C96 | 1-165-871-21 | s | CAP, ELECT 22MF (4.0X5.5) |
| C97 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C98 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C99 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C100 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C101 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C102 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C103 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C104 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C105 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C106 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C107 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C108 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C109 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C110 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C111 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C112 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C113 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C114 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C115 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C116 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C117 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C118 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C119 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C120 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C121 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C122 | 1-165-871-21 | s | CAP, ELECT 22MF (4.0X5.5) |
| C123 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C124 | 1-165-871-21 | s | CAP, ELECT 22MF (4.0X5.5) |
| C132 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C133 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |

(TG-243BG BOARD (SUFFIX 23-) [HDC1400(UC,CE)])

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C134 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C135 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C136 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C137 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C138 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C139 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C140 | 1-165-871-21 | s | CAP, ELECT 22MF (4.0X5.5) |
| C141 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C142 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C143 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C144 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C145 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C148 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C153 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C154 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C155 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C156 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C157 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C158 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C159 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C160 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C161 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C162 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C163 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C164 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C165 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C166 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C169 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C174 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C175 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C176 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C177 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C178 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C179 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C180 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C181 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C184 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C189 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C190 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C191 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C192 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C193 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C194 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C195 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C196 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C197 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C198 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C199 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C200 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C201 | 1-165-884-91 | s | CAP, CERAMIC 2.2MF (1608) |
| C202 | 1-164-842-81 | s | CAP,CHIP CERAMIC 2.0PF CK 1005 |
| C205 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C206 | 1-164-858-81 | s | CAP, CHIP CERAMIC 22PF CH 1005 |
| C207 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| CN1 | 1-778-535-31 | s | CONNECTOR, FFC/FPC(ZIF) AN 45P |
| CN2 | 1-764-080-21 | o | PIN, CONNECTOR (PC BOARD) 8P |
| CN3 | 1-770-449-21 | s | CONNECTOR, BOARD T1 BOARD 70P |
| D1 | 8-719-989-04 | s | DIODE DAN222-TL |

(TG-243BG BOARD (SUFFIX 23-) [HDC1400(UC,CE)])

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| E1 | 1-535-877-22 | s | CHIP, CHECKER |
| IC1 | 6-706-482-01 | s | IC TC7SH00FU(T5RSOYJF) |
| IC2 | 6-706-482-01 | s | IC TC7SH00FU(T5RSOYJF) |
| IC3 | 6-709-647-01 | s | IC TLC2932AIPWR |
| IC4 | 6-704-976-01 | s | IC ADR381ARTZ-REEL7 |
| IC5 | 8-759-685-34 | s | IC M62352AGP-D60Q |
| IC6 | 6-700-387-01 | s | IC EPC2LC20N-TP |
| IC7 | 8-759-573-97 | s | IC SN74LVC541APWR |
| IC8 | 6-704-571-01 | s | IC TLC7703IPWR |
| IC10 | 8-759-669-66 | s | IC TLC272CPWR-12 |
| IC11 | 8-759-327-01 | s | IC NJM062V(TE2) |
| IC12 | 6-706-491-01 | s | IC TC7SH86FU(T5RSOYJF) |
| IC13 | 6-706-491-01 | s | IC TC7SH86FU(T5RSOYJF) |
| IC14 | 8-759-327-01 | s | IC NJM062V(TE2) |
| IC15 | 8-759-327-01 | s | IC NJM062V(TE2) |
| IC16 | 8-759-327-01 | s | IC NJM062V(TE2) |
| IC18 | 6-711-696-01 | s | IC CY62256VNLL-70ZXCT |
| IC19 | 8-759-327-01 | s | IC NJM062V(TE2) |
| IC20 | 6-706-358-01 | s | IC AD5424YCPZ-REEL7 |
| IC21 | 8-759-561-46 | s | IC AD8014ARTZ-REEL7 |
| IC22 | 6-704-099-01 | s | IC TC7WZ08FK(TE85R) |
| IC23 | 6-705-673-01 | s | IC TC7PA53FU(TE85L.F) |
| IC24 | 6-705-673-01 | s | IC TC7PA53FU(TE85L.F) |
| IC25 | 8-759-561-46 | s | IC AD8014ARTZ-REEL7 |
| IC26 | 8-759-561-46 | s | IC AD8014ARTZ-REEL7 |
| IC27 | 6-704-099-01 | s | IC TC7WZ08FK(TE85R) |
| IC28 | 6-705-673-01 | s | IC TC7PA53FU(TE85L.F) |
| IC29 | 6-705-673-01 | s | IC TC7PA53FU(TE85L.F) |
| IC30 | 8-759-561-46 | s | IC AD8014ARTZ-REEL7 |
| IC31 | 8-759-561-46 | s | IC AD8014ARTZ-REEL7 |
| IC32 | 6-704-099-01 | s | IC TC7WZ08FK(TE85R) |
| IC33 | 6-705-673-01 | s | IC TC7PA53FU(TE85L.F) |
| IC34 | 6-705-673-01 | s | IC TC7PA53FU(TE85L.F) |
| IC35 | 8-759-561-46 | s | IC AD8014ARTZ-REEL7 |
| IC36 | 8-759-561-46 | s | IC AD8014ARTZ-REEL7 |
| IC37 | 8-759-560-62 | s | IC TC7WH32FU(TE12R) |
| IC38 | 8-759-557-86 | s | IC NC7SZ86P5X |
| IC39 | 6-710-022-01 | s | IC CAT24C256XI-GT3 |
| IC40 | 6-710-020-01 | s | IC CAT24C08WI-GT3 |
| IC41 | 8-759-669-67 | s | IC TL074CPWR-12 |
| IC42 | 8-759-669-67 | s | IC TL074CPWR-12 |
| IC43 | 8-759-561-46 | s | IC AD8014ARTZ-REEL7 |
| IC44 | 8-759-592-47 | s | IC TC7SZ08FU(TE85R) |
| L1 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L2 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L3 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L4 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L5 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L6 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L7 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L8 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L9 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L10 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L12 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L13 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L14 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L15 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L16 | 1-416-948-21 | s | COIL, CHOKE 10UH |

(TG-243BG BOARD (SUFFIX 23-) [HDC1400(UC,CE)])

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| L17 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| Q1 | 8-729-144-81 | s | TRANSISTOR 2SC4176T1B33B34B35 |
| Q2 | 8-729-144-81 | s | TRANSISTOR 2SC4176T1B33B34B35 |
| Q3 | 8-729-209-73 | s | TRANSISTOR 2SA1213Y-TE12L |
| Q4 | 8-729-209-73 | s | TRANSISTOR 2SA1213Y-TE12L |
| Q5 | 8-729-144-81 | s | TRANSISTOR 2SC4176T1B33B34B35 |
| Q6 | 8-729-209-73 | s | TRANSISTOR 2SA1213Y-TE12L |
| Q7 | 8-729-144-81 | s | TRANSISTOR 2SC4176T1B33B34B35 |
| Q8 | 8-729-140-86 | s | TRANSISTOR 2SA1610-T1Y34 |
| Q9 | 8-729-209-73 | s | TRANSISTOR 2SA1213Y-TE12L |
| Q10 | 8-729-209-77 | s | TRANSISTOR 2SC2873Y-TE12L |
| Q11 | 8-729-144-81 | s | TRANSISTOR 2SC4176T1B33B34B35 |
| Q12 | 8-729-209-73 | s | TRANSISTOR 2SA1213Y-TE12L |
| R1 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R2 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R3 | 1-208-907-81 | s | RES, CHIP 6.8K (1005) |
| R4 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R5 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R6 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R7 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R8 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R9 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R10 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R11 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R12 | 1-208-907-81 | s | RES, CHIP 6.8K (1005) |
| R13 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R14 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R15 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R16 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R17 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R18 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R19 | 1-220-878-81 | s | RES, CHIP 22 (1005) |
| R20 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R21 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R22 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R23 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R24 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R25 | 1-243-975-81 | s | RES, CHIP 4.7M (1005) |
| R26 | 1-208-891-81 | s | RES, CHIP 1.5K (1005) |
| R27 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R28 | 1-208-907-81 | s | RES, CHIP 6.8K (1005) |
| R29 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R30 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R31 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R32 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R33 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R34 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R35 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R36 | 1-208-913-81 | s | RES, CHIP 12K (1005) |
| R37 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R38 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R39 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R41 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R42 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R43 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R44 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R45 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R46 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |

(TG-243BG BOARD (SUFFIX 23-) [HDC1400(UC,CE)])

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R47 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R59 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R60 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R61 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R62 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R63 | 1-208-893-81 | s | RES, CHIP 1.8K (1005) |
| R64 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R65 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R66 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R67 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R68 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R70 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R71 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R73 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R74 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R76 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R77 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R78 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R81 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R83 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R84 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R85 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R86 | 1-220-878-81 | s | RES, CHIP 22 (1005) |
| R87 | 1-208-931-81 | s | RES, CHIP 68K (1005) |
| R88 | 1-208-931-81 | s | RES, CHIP 68K (1005) |
| R99 | 1-220-878-81 | s | RES, CHIP 22 (1005) |
| R120 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R121 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R122 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R123 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R124 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R125 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R126 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R127 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R128 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R129 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R130 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R131 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R132 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R133 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R134 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R135 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R136 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R137 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R138 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R140 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R141 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R142 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R143 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R144 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R145 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R146 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R147 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R148 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R149 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R150 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R151 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R153 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R155 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |

(TG-243BG BOARD (SUFFIX 23-) [HDC1400(UC,CE)])

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R156 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R157 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R158 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R159 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R160 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R161 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R162 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R163 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R164 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R165 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R166 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R167 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R168 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R169 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R170 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R171 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R172 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R173 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R174 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R175 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R176 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R177 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R178 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R179 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R180 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R181 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R182 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R183 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R184 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R185 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R190 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R196 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R197 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R198 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R202 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R203 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R204 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R205 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R206 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R207 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R208 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R209 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R210 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R212 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R213 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R214 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R215 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R216 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R220 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R222 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R223 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R224 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R225 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R227 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R228 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R229 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R230 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R231 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R232 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |

(TG-243BG BOARD (SUFFIX 23-) [HDC1400(UC,CE)])

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R233 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R234 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R235 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R236 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R237 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R238 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R239 | 1-220-882-81 | s | RES, CHIP 33 (1005) |
| R240 | 1-220-882-81 | s | RES, CHIP 33 (1005) |
| R241 | 1-220-882-81 | s | RES, CHIP 33 (1005) |
| R242 | 1-208-860-81 | s | RES, CHIP 75 (1005) |
| R243 | 1-220-882-81 | s | RES, CHIP 33 (1005) |
| R244 | 1-220-882-81 | s | RES, CHIP 33 (1005) |
| R245 | 1-220-882-81 | s | RES, CHIP 33 (1005) |
| R246 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R247 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R248 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R249 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R250 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R251 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R252 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R253 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R254 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R255 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R258 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R259 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R264 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R265 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R266 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R267 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R268 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R269 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R270 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R271 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R272 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R273 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R274 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R275 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R276 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R277 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R278 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R279 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R280 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R281 | 1-220-878-81 | s | RES, CHIP 22 (1005) |
| R282 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R283 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R284 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R285 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R286 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R288 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R289 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R292 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R293 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R298 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R299 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R300 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R301 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R302 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R303 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R304 | 1-208-863-81 | s | RES, CHIP 100 (1005) |

(TG-243BG BOARD (SUFFIX 23-) [HDC1400(UC,CE)])

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R305 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R306 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R307 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R308 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R309 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R310 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R311 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R312 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R313 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R314 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R315 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R318 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R319 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R324 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R325 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R326 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R327 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R328 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R329 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R330 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R331 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R332 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R333 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R334 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R335 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R336 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R337 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R338 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R339 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R340 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| R342 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| R343 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R344 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R345 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R346 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R347 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R348 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R349 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R350 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R352 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R353 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R355 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R356 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R358 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R360 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R362 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R363 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R365 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R367 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R369 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R371 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R373 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R375 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R376 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R377 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R379 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R381 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R383 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R385 | 1-208-863-81 | s | RES, CHIP 100 (1005) |

(TG-243BG BOARD (SUFFIX 23-) [HDC1400(UC,CE)])

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R387 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R389 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R391 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R393 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| RB1 | 1-234-370-21 | s | RES, NETWORK 22 (1005X4) |
| S1 | 1-771-709-41 | s | SWITCH, SLIDE |
| X1 | 1-813-529-11 | s | OSCILLATOR, CRYSTAL (VCXO) 3.3 |

TG-243CG BOARD (SUFFIX 21,22) [HDC1580(CN)]

*1: [Board No. suffix 21]
*2: [Board No. suffix 22]

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| 1pc | A-1179-309-A | s | MOUNTED CIRCUIT BOARD, TG-243CG |
| C1 | 1-126-391-21 | s | CAP, CHIP ELECT 47MF (5X5.7) |
| C2 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C3 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C4 | 1-165-884-91 | s | CAP, CERAMIC 2.2MF (1608) |
| C5 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C6 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C7 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C8 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C9 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C10 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C11 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C12 | 1-164-850-81 | s | CAP, CHIP CERAMIC 10PF CH 1005 |
| C13 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C14 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C15 | 1-165-872-21 | s | CAP, ELECT 47MF (5.0X6.5) |
| C16 | 1-165-872-21 | s | CAP, ELECT 47MF (5.0X6.5) |
| C17 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C18 | 1-165-872-21 | s | CAP, ELECT 47MF (5.0X6.5) |
| C19 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C20 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C21 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C22 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C23 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C24 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C25 | 1-126-395-21 | s | CAP, CHIP ELECT 22MF (5X5.7) |
| C26 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C27 | 1-165-884-91 | s | CAP, CERAMIC 2.2MF (1608) |
| C28 | 1-165-884-91 | s | CAP, CERAMIC 2.2MF (1608) |
| C29 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C30 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C31 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C34 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C35 | 1-126-391-21 | s | CAP, CHIP ELECT 47MF (5X5.7) |
| C36 | 1-165-884-91 | s | CAP, CERAMIC 2.2MF (1608) |
| C38 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C39 | 1-165-872-21 | s | CAP, ELECT 47MF (5.0X6.5) |
| C40 | 1-165-872-21 | s | CAP, ELECT 47MF (5.0X6.5) |
| C42 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C43 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C44 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C45 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C46 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C49 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C51 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C54 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C55 | 1-165-884-91 | s | CAP, CERAMIC 2.2MF (1608) |
| C56 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C57 | 1-165-872-21 | s | CAP, ELECT 47MF (5.0X6.5) |
| C58 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C59 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C60 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C61 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C62 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C63 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C64 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |

(TG-243CG BOARD (SUFFIX 21,22) [HDC1580(CN)])

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C65 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C66 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C67 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C68 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C69 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C70 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C71 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C72 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C73 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C74 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C75 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C76 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C77 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C78 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C79 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C80 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C81 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C82 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C83 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C84 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C86 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C87 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C88 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C89 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C90 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C91 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C92 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C93 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C94 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C95 | 1-165-871-21 | s | CAP, ELECT 22MF (4.0X5.5) |
| C96 | 1-165-871-21 | s | CAP, ELECT 22MF (4.0X5.5) |
| C97 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C98 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C99 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C100 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C101 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C102 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C103 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C104 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C105 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C106 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C107 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C108 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C109 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C110 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C111 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C112 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C113 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C114 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C115 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C116 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C117 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C118 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C119 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C120 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C121 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C122 | 1-165-871-21 | s | CAP, ELECT 22MF (4.0X5.5) |
| C123 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C124 | 1-165-871-21 | s | CAP, ELECT 22MF (4.0X5.5) |
| C132 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |

(TG-243CG BOARD (SUFFIX 21,22) [HDC1580(CN)])

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C133 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C134 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C135 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C136 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C137 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C138 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C139 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C140 | 1-165-871-21 | s | CAP, ELECT 22MF (4.0X5.5) |
| C141 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C142 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C143 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C144 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C145 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C148 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C153 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C154 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C155 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C156 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C157 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C158 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C159 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C160 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C161 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C162 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C163 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C164 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C165 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C166 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C169 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C174 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C175 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C176 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C177 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C178 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C179 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C180 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C181 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C184 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C189 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C190 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C191 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C192 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C193 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C194 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C195 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C196 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C197 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C198 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C199 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C200 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C201 | 1-165-884-91 | s | CAP, CERAMIC 2.2MF (1608) |
| C202 | 1-164-842-81 | s | CAP,CHIP CERAMIC 2.0PF CK 1005 |
| C205 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C206 | 1-164-858-81 | s | CAP, CHIP CERAMIC 22PF CH 1005 |
| C207 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| CN1 | 1-778-535-31 | s | CONNECTOR, FFC/FPC(ZIF) AN 45P |
| CN2 | 1-764-080-21 | o | PIN, CONNECTOR (PC BOARD) 8P |
| CN3 | 1-770-449-21 | o | CONNECTOR, BOARD T1 BOARD 70P |
| D1 | 8-719-989-04 | s | DIODE DAN222-TL |

(TG-243CG BOARD (SUFFIX 21,22) [HDC1580(CN)])

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| E1 | 1-535-877-22 | s | CHIP, CHECKER |
| IC1 | 6-706-482-01 | s | IC TC7SH00FU(T5RSOYJF) |
| IC2 | 6-706-482-01 | s | IC TC7SH00FU(T5RSOYJF) |
| IC3 | 8-759-669-75 | s | IC TLC2932IPWRG4 |
| IC4 | 6-704-976-01 | s | IC ADR381ARTZ-REEL7 |
| IC5 | 8-759-685-34 | s | IC M62352AGP-D60Q |
| IC6 | 6-700-387-01 | s | IC EPC2LC20N-TP |
| IC7 | 8-759-573-97 | s | IC SN74LVC541APWR |
| IC8 | 8-759-669-69 | s | IC TLC7733IPWR-12 |
| IC10 | 8-759-669-66 | s | IC TLC272CPWR-12 |
| IC11 | 8-759-327-01 | s | IC NJM062V(TE2) |
| IC12 | 6-706-491-01 | s | IC TC7SH86FU(T5RSOYJF) |
| IC14 | 8-759-327-01 | s | IC NJM062V(TE2) |
| IC15 | 8-759-327-01 | s | IC NJM062V(TE2) |
| IC16 | 8-759-327-01 | s | IC NJM062V(TE2) |
| IC18 | 8-759-585-28 | s | IC CY62256VLL-70ZXC-T2 |
| IC19 | 8-759-327-01 | s | IC NJM062V(TE2) |
| IC20 | 6-706-358-01 | s | IC AD5424YCPZ-REEL7 |
| IC21 | 8-759-561-46 | s | IC AD8014ARTZ-REEL7 |
| IC22 | 6-704-099-01 | s | IC TC7WZ08FK(TE85R) |
| IC23 | 6-705-673-01 | s | IC TC7PA53FU(TE85L.F) |
| IC24 | 6-705-673-01 | s | IC TC7PA53FU(TE85L.F) |
| IC25 | 8-759-561-46 | s | IC AD8014ARTZ-REEL7 |
| IC26 | 8-759-561-46 | s | IC AD8014ARTZ-REEL7 |
| IC27 | 6-704-099-01 | s | IC TC7WZ08FK(TE85R) |
| IC28 | 6-705-673-01 | s | IC TC7PA53FU(TE85L.F) |
| IC29 | 6-705-673-01 | s | IC TC7PA53FU(TE85L.F) |
| IC30 | 8-759-561-46 | s | IC AD8014ARTZ-REEL7 |
| IC31 | 8-759-561-46 | s | IC AD8014ARTZ-REEL7 |
| IC32 | 6-704-099-01 | s | IC TC7WZ08FK(TE85R) |
| IC33 | 6-705-673-01 | s | IC TC7PA53FU(TE85L.F) |
| IC34 | 6-705-673-01 | s | IC TC7PA53FU(TE85L.F) |
| IC35 | 8-759-561-46 | s | IC AD8014ARTZ-REEL7 |
| IC36 | 8-759-561-46 | s | IC AD8014ARTZ-REEL7 |
| IC37 | 8-759-560-62 | s | IC TC7WH32FU(TE12R) |
| IC38 | 8-759-557-86 | s | IC NC7SZ86P5X |
| IC39 | 6-704-912-01 | s | IC CAT24WC256XI-TE13 |
| IC41 | 8-759-669-67 | s | IC TL074CPWR-12 |
| IC42 | 8-759-561-46 | s | IC AD8014ARTZ-REEL7 |
| IC43 | 8-759-561-46 | s | IC AD8014ARTZ-REEL7 |
| IC44 | 8-759-592-47 | s | IC TC7SZ08FU(TE85R) |
| L1 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L2 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L3 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L4 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L5 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| *2 L6 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L7 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L8 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L9 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L10 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L12 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L13 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L14 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L15 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L16 | 1-416-948-21 | s | COIL, CHOKE 10UH |
| L17 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| Q1 | 8-729-144-81 | s | TRANSISTOR 2SC4176T1B33B34B35 |
| Q2 | 8-729-144-81 | s | TRANSISTOR 2SC4176T1B33B34B35 |

(TG-243CG BOARD (SUFFIX 21,22) [HDC1580(CN)])

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| Q3 | 8-729-230-27 | s | TRANSISTOR 2SA1213Y-TE12L |
| Q4 | 8-729-230-27 | s | TRANSISTOR 2SA1213Y-TE12L |
| Q5 | 8-729-144-81 | s | TRANSISTOR 2SC4176T1B33B34B35 |
| Q6 | 8-729-230-27 | s | TRANSISTOR 2SA1213Y-TE12L |
| Q7 | 8-729-144-81 | s | TRANSISTOR 2SC4176T1B33B34B35 |
| Q8 | 8-729-140-86 | s | TRANSISTOR 2SA1610-T1Y34 |
| Q9 | 8-729-230-27 | s | TRANSISTOR 2SA1213Y-TE12L |
| Q10 | 8-729-209-77 | s | TRANSISTOR 2SC2873Y-TE12L |
| Q11 | 8-729-144-81 | s | TRANSISTOR 2SC4176T1B33B34B35 |
| Q12 | 8-729-230-27 | s | TRANSISTOR 2SA1213Y-TE12L |
| R1 | 1-218-961-81 | s | RES, CHIP 4.7K |
| R2 | 1-218-961-81 | s | RES, CHIP 4.7K |
| R3 | 1-208-703-11 | s | RES, CHIP 6.8K (1005) |
| R4 | 1-208-715-11 | s | RES, CHIP 22K (1005) |
| R5 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R6 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R7 | 1-218-953-81 | s | RES, CHIP 1.0K |
| R8 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R9 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R10 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R11 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R12 | 1-208-703-11 | s | RES, CHIP 6.8K (1005) |
| R13 | 1-208-715-11 | s | RES, CHIP 22K (1005) |
| R14 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R15 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R16 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R17 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R18 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R19 | 1-208-643-11 | s | RES, CHIP 22 (1005) |
| R20 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R21 | 1-218-945-11 | s | RES, CHIP 220 (1005) |
| R22 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R23 | 1-218-945-11 | s | RES, CHIP 220 (1005) |
| R24 | 1-208-715-11 | s | RES, CHIP 22K (1005) |
| R25 | 1-243-975-81 | s | RES, CHIP 4.7M (1005) |
| R26 | 1-208-891-81 | s | RES, CHIP 1.5K (1005) |
| R27 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R28 | 1-208-703-11 | s | RES, CHIP 6.8K (1005) |
| R29 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R30 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R31 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R32 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R33 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R34 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R35 | 1-208-917-81 | s | RES, CHIP 18K (1005) |
| R36 | 1-208-913-81 | s | RES, CHIP 12K (1005) |
| R37 | 1-208-711-11 | s | RES, CHIP 15K (1005) |
| R38 | 1-208-691-11 | s | RES, CHIP 2.2K (1005) |
| R40 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R41 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R42 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R43 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R44 | 1-218-945-11 | s | RES, CHIP 220 (1005) |
| R45 | 1-218-945-11 | s | RES, CHIP 220 (1005) |
| R46 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R47 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R59 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R60 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R61 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |

(TG-243CG BOARD (SUFFIX 21,22) [HDC1580(CN)])

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R62 | 1-218-945-11 | s | RES, CHIP 220 (1005) |
| R63 | 1-208-893-81 | s | RES, CHIP 1.8K (1005) |
| R64 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R65 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R66 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R67 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R69 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R70 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R71 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R72 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R74 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R76 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R77 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R79 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R81 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R82 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R84 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R85 | 1-218-945-11 | s | RES, CHIP 220 (1005) |
| R86 | 1-208-643-11 | s | RES, CHIP 22 (1005) |
| R87 | *2 1-208-931-81 | s | RES, CHIP 68K (1005) |
| R88 | 1-208-931-81 | s | RES, CHIP 68K (1005) |
| R99 | 1-208-643-11 | s | RES, CHIP 22 (1005) |
| R120 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R121 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R122 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R123 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R124 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R125 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R126 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R127 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R128 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R129 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R130 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R131 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R132 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R133 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R134 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R135 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R136 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R138 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R139 | *1 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R140 | 1-208-635-11 | s | RES, CHIP 10 (1005) |
| R141 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R142 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R143 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R144 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R145 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R146 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R147 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R148 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R149 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R150 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R151 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R153 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R155 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R156 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R157 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R158 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R159 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R160 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |

(TG-243CG BOARD (SUFFIX 21,22) [HDC1580(CN)])

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R161 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R162 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R163 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R164 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R165 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R166 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R167 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R168 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R169 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R170 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R171 | 1-208-635-11 | s | RES, CHIP 10 (1005) |
| R172 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R173 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R174 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R175 | 1-218-945-11 | s | RES, CHIP 220 (1005) |
| R176 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R177 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R178 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R179 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R180 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R181 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R182 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R183 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R184 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R185 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R190 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R196 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R197 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R198 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R202 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R203 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R204 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R205 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R206 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R207 | 1-208-635-11 | s | RES, CHIP 10 (1005) |
| R208 | 1-208-635-11 | s | RES, CHIP 10 (1005) |
| R209 | 1-208-635-11 | s | RES, CHIP 10 (1005) |
| R210 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R212 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R213 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R214 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R215 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R216 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R220 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R222 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R223 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R224 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R225 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R227 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R228 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R229 | 1-208-715-11 | s | RES, CHIP 22K (1005) |
| R230 | 1-208-691-11 | s | RES, CHIP 2.2K (1005) |
| R231 | 1-208-691-11 | s | RES, CHIP 2.2K (1005) |
| R232 | 1-208-691-11 | s | RES, CHIP 2.2K (1005) |
| R233 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R234 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R235 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R236 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R237 | 1-218-941-11 | s | RES, CHIP 100 (1005) |

(TG-243CG BOARD (SUFFIX 21,22) [HDC1580(CN)])

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R238 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R242 | 1-208-860-81 | s | RES, CHIP 75 (1005) |
| R243 | 1-220-882-81 | s | RES, CHIP 33 (1005) |
| R244 | 1-220-882-81 | s | RES, CHIP 33 (1005) |
| R245 | 1-220-882-81 | s | RES, CHIP 33 (1005) |
| R246 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R247 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R248 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R249 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R250 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R251 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R252 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R253 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R254 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R255 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R258 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R259 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R264 | 1-208-711-11 | s | RES, CHIP 15K (1005) |
| R265 | 1-208-635-11 | s | RES, CHIP 10 (1005) |
| R266 | 1-208-635-11 | s | RES, CHIP 10 (1005) |
| R267 | 1-208-635-11 | s | RES, CHIP 10 (1005) |
| R268 | 1-208-635-11 | s | RES, CHIP 10 (1005) |
| R269 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R270 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R271 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R272 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R273 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R274 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R275 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R276 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R277 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R278 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R279 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R280 | 1-208-635-11 | s | RES, CHIP 10 (1005) |
| R281 | 1-208-643-11 | s | RES, CHIP 22 (1005) |
| R282 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R283 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R284 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R285 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R286 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R288 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R289 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R292 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R293 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R298 | 1-208-635-11 | s | RES, CHIP 10 (1005) |
| R299 | 1-208-635-11 | s | RES, CHIP 10 (1005) |
| R300 | 1-208-635-11 | s | RES, CHIP 10 (1005) |
| R301 | 1-208-635-11 | s | RES, CHIP 10 (1005) |
| R302 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R303 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R304 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R305 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R306 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R307 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R308 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R309 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R310 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R311 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R312 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |

(TG-243CG BOARD (SUFFIX 21,22) [HDC1580(CN)])

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R313 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R314 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R315 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R318 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R319 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R324 | 1-208-635-11 | s | RES, CHIP 10 (1005) |
| R325 | 1-208-635-11 | s | RES, CHIP 10 (1005) |
| R326 | 1-208-635-11 | s | RES, CHIP 10 (1005) |
| R327 | 1-208-635-11 | s | RES, CHIP 10 (1005) |
| R328 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R329 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R330 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R331 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R332 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R333 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R334 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R335 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R336 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R337 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R338 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R339 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R340 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| R342 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| R343 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R344 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R345 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R346 | 1-208-683-11 | s | RES, CHIP 1.0K (1005) |
| R347 | 1-208-715-11 | s | RES, CHIP 22K (1005) |
| R348 | 1-208-691-11 | s | RES, CHIP 2.2K (1005) |
| R349 | 1-208-691-11 | s | RES, CHIP 2.2K (1005) |
| R350 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R352 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R353 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R355 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R356 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R358 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R360 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R362 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R363 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R365 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R367 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R369 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R371 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R373 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R375 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R376 | 1-218-941-11 | s | RES, CHIP 100 (1005) |
| R377 | 1-208-691-11 | s | RES, CHIP 2.2K (1005) |
| R379 | 1-208-691-11 | s | RES, CHIP 2.2K (1005) |
| R381 | 1-208-691-11 | s | RES, CHIP 2.2K (1005) |
| RB1 | 1-234-370-21 | s | RES, NETWORK 22 (1005X4) |
| S1 | 1-771-709-41 | s | SWITCH, SLIDE |
| X2 | 1-813-530-11 | s | OSCILLATOR, CRYSTAL (VCXO) 3.3 |

TG-243CG BOARD (SUFFIX 23-) [HDC1580(CN)]

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| 1pc | A-1179-309-A | s | MOUNTED CIRCUIT BOARD, TG-243CG |
| C1 | 1-126-391-21 | s | CAP, CHIP ELECT 47MF (5X5.7) |
| C2 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C3 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C4 | 1-165-884-91 | s | CAP, CERAMIC 2.2MF (1608) |
| C5 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C6 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C7 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C8 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C9 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C10 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C11 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C12 | 1-164-850-81 | s | CAP, CHIP CERAMIC 10PF CH 1005 |
| C13 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C14 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C15 | 1-165-872-21 | s | CAP, ELECT 47MF (5.0X6.5) |
| C16 | 1-165-872-21 | s | CAP, ELECT 47MF (5.0X6.5) |
| C17 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C18 | 1-165-872-21 | s | CAP, ELECT 47MF (5.0X6.5) |
| C19 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C20 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C21 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C22 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C23 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C24 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C25 | 1-126-395-21 | s | CAP, CHIP ELECT 22MF (5X5.7) |
| C26 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C27 | 1-165-884-91 | s | CAP, CERAMIC 2.2MF (1608) |
| C28 | 1-165-884-91 | s | CAP, CERAMIC 2.2MF (1608) |
| C29 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C30 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C31 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C34 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C35 | 1-126-391-21 | s | CAP, CHIP ELECT 47MF (5X5.7) |
| C36 | 1-165-884-91 | s | CAP, CERAMIC 2.2MF (1608) |
| C38 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C39 | 1-165-872-21 | s | CAP, ELECT 47MF (5.0X6.5) |
| C40 | 1-165-872-21 | s | CAP, ELECT 47MF (5.0X6.5) |
| C42 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C43 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C44 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C45 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C46 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C49 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C51 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C54 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C55 | 1-165-884-91 | s | CAP, CERAMIC 2.2MF (1608) |
| C56 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C57 | 1-165-872-21 | s | CAP, ELECT 47MF (5.0X6.5) |
| C58 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C59 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C60 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C61 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C62 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C63 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C64 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C65 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C66 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |

(TG-243CG BOARD (SUFFIX 23-) [HDC1580(CN)])

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C67 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C68 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C69 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C70 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C71 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C72 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C73 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C74 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C75 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C76 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C77 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C78 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C79 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C80 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C81 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C82 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C83 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C84 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C86 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C87 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C88 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C89 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C90 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C91 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C92 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C93 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C94 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C95 | 1-165-871-21 | s | CAP, ELECT 22MF (4.0X5.5) |
| C96 | 1-165-871-21 | s | CAP, ELECT 22MF (4.0X5.5) |
| C97 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C98 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C99 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C100 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C101 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C102 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C103 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C104 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C105 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C106 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C107 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C108 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C109 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C110 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C111 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C112 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C113 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C114 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C115 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C116 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C117 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C118 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C119 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C120 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C121 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C122 | 1-165-871-21 | s | CAP, ELECT 22MF (4.0X5.5) |
| C123 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C124 | 1-165-871-21 | s | CAP, ELECT 22MF (4.0X5.5) |
| C132 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C133 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |

(TG-243CG BOARD (SUFFIX 23-) [HDC1580(CN)])

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C134 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C135 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C136 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C137 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C138 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C139 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C140 | 1-165-871-21 | s | CAP, ELECT 22MF (4.0X5.5) |
| C141 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C142 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C143 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C144 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C145 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C148 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C153 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C154 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C155 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C156 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C157 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C158 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C159 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C160 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C161 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C162 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C163 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C164 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C165 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C166 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C169 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C174 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C175 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C176 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C177 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C178 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C179 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C180 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C181 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C184 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C189 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C190 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C191 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C192 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C193 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C194 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C195 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C196 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C197 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C198 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C199 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C200 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C201 | 1-165-884-91 | s | CAP, CERAMIC 2.2MF (1608) |
| C202 | 1-164-842-81 | s | CAP,CHIP CERAMIC 2.0PF CK 1005 |
| C205 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C206 | 1-164-858-81 | s | CAP, CHIP CERAMIC 22PF CH 1005 |
| C207 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| CN1 | 1-778-535-31 | s | CONNECTOR, FFC/FPC(ZIF) AN 45P |
| CN2 | 1-764-080-21 | o | PIN, CONNECTOR (PC BOARD) 8P |
| CN3 | 1-770-449-21 | s | CONNECTOR, BOARD T1 BOARD 70P |
| D1 | 8-719-989-04 | s | DIODE DAN222-TL |

(TG-243CG BOARD (SUFFIX 23-) [HDC1580(CN)])

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| E1 | 1-535-877-22 | s | CHIP, CHECKER |
| IC1 | 6-706-482-01 | s | IC TC7SH00FU(T5RSOYJF) |
| IC2 | 6-706-482-01 | s | IC TC7SH00FU(T5RSOYJF) |
| IC3 | 6-709-647-01 | s | IC TLC2932AIPWR |
| IC4 | 6-704-976-01 | s | IC ADR381ARTZ-REEL7 |
| IC5 | 8-759-685-34 | s | IC M62352AGP-D60Q |
| IC6 | 6-700-387-01 | s | IC EPC2LC20N-TP |
| IC7 | 8-759-573-97 | s | IC SN74LVC541APWR |
| IC8 | 6-704-571-01 | s | IC TLC7703IPWR |
| IC10 | 8-759-669-66 | s | IC TLC272CPWR-12 |
| IC11 | 8-759-327-01 | s | IC NJM062V(TE2) |
| IC12 | 6-706-491-01 | s | IC TC7SH86FU(T5RSOYJF) |
| IC14 | 8-759-327-01 | s | IC NJM062V(TE2) |
| IC15 | 8-759-327-01 | s | IC NJM062V(TE2) |
| IC16 | 8-759-327-01 | s | IC NJM062V(TE2) |
| IC18 | 6-711-696-01 | s | IC CY62256VNLL-70ZXCT |
| IC19 | 8-759-327-01 | s | IC NJM062V(TE2) |
| IC20 | 6-706-358-01 | s | IC AD5424YCPZ-REEL7 |
| IC21 | 8-759-561-46 | s | IC AD8014ARTZ-REEL7 |
| IC22 | 6-704-099-01 | s | IC TC7WZ08FK(TE85R) |
| IC23 | 6-705-673-01 | s | IC TC7PA53FU(TE85L.F) |
| IC24 | 6-705-673-01 | s | IC TC7PA53FU(TE85L.F) |
| IC25 | 8-759-561-46 | s | IC AD8014ARTZ-REEL7 |
| IC26 | 8-759-561-46 | s | IC AD8014ARTZ-REEL7 |
| IC27 | 6-704-099-01 | s | IC TC7WZ08FK(TE85R) |
| IC28 | 6-705-673-01 | s | IC TC7PA53FU(TE85L.F) |
| IC29 | 6-705-673-01 | s | IC TC7PA53FU(TE85L.F) |
| IC30 | 8-759-561-46 | s | IC AD8014ARTZ-REEL7 |
| IC31 | 8-759-561-46 | s | IC AD8014ARTZ-REEL7 |
| IC32 | 6-704-099-01 | s | IC TC7WZ08FK(TE85R) |
| IC33 | 6-705-673-01 | s | IC TC7PA53FU(TE85L.F) |
| IC34 | 6-705-673-01 | s | IC TC7PA53FU(TE85L.F) |
| IC35 | 8-759-561-46 | s | IC AD8014ARTZ-REEL7 |
| IC36 | 8-759-561-46 | s | IC AD8014ARTZ-REEL7 |
| IC37 | 8-759-560-62 | s | IC TC7WH32FU(TE12R) |
| IC38 | 8-759-557-86 | s | IC NC7SZ86P5X |
| IC39 | 6-710-022-01 | s | IC CAT24C256XI-GT3 |
| IC40 | 6-710-020-01 | s | IC CAT24C08WI-GT3 |
| IC41 | 8-759-669-67 | s | IC TL074CPWR-12 |
| IC42 | 8-759-669-67 | s | IC TL074CPWR-12 |
| IC43 | 8-759-561-46 | s | IC AD8014ARTZ-REEL7 |
| IC44 | 8-759-592-47 | s | IC TC7SZ08FU(TE85R) |
| L1 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L2 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L3 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L4 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L5 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L6 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L7 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L8 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L9 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L10 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L12 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L13 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L14 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L15 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L16 | 1-416-948-21 | s | COIL, CHOKE 10UH |

(TG-243CG BOARD (SUFFIX 23-) [HDC1580(CN)])

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| L17 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| Q1 | 8-729-144-81 | s | TRANSISTOR 2SC4176T1B33B34B35 |
| Q2 | 8-729-144-81 | s | TRANSISTOR 2SC4176T1B33B34B35 |
| Q3 | 8-729-209-73 | s | TRANSISTOR 2SA1213Y-TE12L |
| Q4 | 8-729-209-73 | s | TRANSISTOR 2SA1213Y-TE12L |
| Q5 | 8-729-144-81 | s | TRANSISTOR 2SC4176T1B33B34B35 |
| Q6 | 8-729-209-73 | s | TRANSISTOR 2SA1213Y-TE12L |
| Q7 | 8-729-144-81 | s | TRANSISTOR 2SC4176T1B33B34B35 |
| Q8 | 8-729-140-86 | s | TRANSISTOR 2SA1610-T1Y34 |
| Q9 | 8-729-209-73 | s | TRANSISTOR 2SA1213Y-TE12L |
| Q10 | 8-729-209-77 | s | TRANSISTOR 2SC2873Y-TE12L |
| Q11 | 8-729-144-81 | s | TRANSISTOR 2SC4176T1B33B34B35 |
| Q12 | 8-729-209-73 | s | TRANSISTOR 2SA1213Y-TE12L |
| R1 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R2 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R3 | 1-208-907-81 | s | RES, CHIP 6.8K (1005) |
| R4 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R5 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R6 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R7 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R8 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R9 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R10 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R11 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R12 | 1-208-907-81 | s | RES, CHIP 6.8K (1005) |
| R13 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R14 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R15 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R16 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R17 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R18 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R19 | 1-220-878-81 | s | RES, CHIP 22 (1005) |
| R20 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R21 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R22 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R23 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R24 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R25 | 1-243-975-81 | s | RES, CHIP 4.7M (1005) |
| R26 | 1-208-891-81 | s | RES, CHIP 1.5K (1005) |
| R27 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R28 | 1-208-907-81 | s | RES, CHIP 6.8K (1005) |
| R29 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R30 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R31 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R32 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R33 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R34 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R35 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R36 | 1-208-913-81 | s | RES, CHIP 12K (1005) |
| R37 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R38 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R40 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R41 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R42 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R43 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R44 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R45 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R46 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |

(TG-243CG BOARD (SUFFIX 23-) [HDC1580(CN)])

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R47 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R59 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R60 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R61 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R62 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R63 | 1-208-893-81 | s | RES, CHIP 1.8K (1005) |
| R64 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R65 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R66 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R67 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R69 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R70 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R71 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R72 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R74 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R76 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R77 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R79 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R81 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R82 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R84 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R85 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R86 | 1-220-878-81 | s | RES, CHIP 22 (1005) |
| R87 | 1-208-931-81 | s | RES, CHIP 68K (1005) |
| R88 | 1-208-931-81 | s | RES, CHIP 68K (1005) |
| R99 | 1-220-878-81 | s | RES, CHIP 22 (1005) |
| R120 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R121 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R122 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R123 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R124 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R125 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R126 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R127 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R128 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R129 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R130 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R131 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R132 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R133 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R134 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R135 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R136 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R138 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R140 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R141 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R142 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R143 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R144 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R145 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R146 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R147 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R148 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R149 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R150 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R151 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R153 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R155 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R156 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |

(TG-243CG BOARD (SUFFIX 23-) [HDC1580(CN)])

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R157 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R158 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R159 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R160 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R161 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R162 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R163 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R164 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R165 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R166 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R167 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R168 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R169 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R170 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R171 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R172 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R173 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R174 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R175 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R176 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R177 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R178 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R179 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R180 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R181 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R182 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R183 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R184 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R185 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R190 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R196 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R197 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R198 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R202 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R203 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R204 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R205 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R206 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R207 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R208 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R209 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R210 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R212 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R213 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R214 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R215 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R216 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R220 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R222 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R223 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R224 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R225 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R227 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R228 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R229 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R230 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R231 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R232 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R233 | 1-208-879-81 | s | RES, CHIP 470 (1005) |

(TG-243CG BOARD (SUFFIX 23-) [HDC1580(CN)])

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R234 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R235 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R236 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R237 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R238 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R239 | 1-220-882-81 | s | RES, CHIP 33 (1005) |
| R240 | 1-220-882-81 | s | RES, CHIP 33 (1005) |
| R241 | 1-220-882-81 | s | RES, CHIP 33 (1005) |
| R242 | 1-208-860-81 | s | RES, CHIP 75 (1005) |
| R243 | 1-220-882-81 | s | RES, CHIP 33 (1005) |
| R244 | 1-220-882-81 | s | RES, CHIP 33 (1005) |
| R245 | 1-220-882-81 | s | RES, CHIP 33 (1005) |
| R246 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R247 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R248 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R249 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R250 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R251 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R252 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R253 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R254 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R255 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R258 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R259 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R264 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R265 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R266 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R267 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R268 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R269 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R270 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R271 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R272 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R273 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R274 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R275 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R276 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R277 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R278 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R279 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R280 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R281 | 1-220-878-81 | s | RES, CHIP 22 (1005) |
| R282 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R283 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R284 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R285 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R286 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R288 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R289 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R292 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R293 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R298 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R299 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R300 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R301 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R302 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R303 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R304 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R305 | 1-208-863-81 | s | RES, CHIP 100 (1005) |

(TG-243CG BOARD (SUFFIX 23-) [HDC1580(CN)])

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R306 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R307 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R308 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R309 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R310 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R311 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R312 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R313 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R314 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R315 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R318 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R319 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R324 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R325 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R326 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R327 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R328 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R329 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R330 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R331 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R332 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R333 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R334 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R335 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R336 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R337 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R338 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R339 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R340 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| R342 | 1-216-864-91 | s | CONDUCTOR, CHIP (1608) |
| R343 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R344 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R345 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R346 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R347 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R348 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R349 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R350 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R352 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R353 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R355 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R356 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R358 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R360 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R362 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R363 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R365 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R367 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R369 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R371 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R373 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R375 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R376 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R377 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R379 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R381 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R383 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R385 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R387 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |

(TG-243CG BOARD (SUFFIX 23-) [HDC1580(CN)])

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R389 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R391 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R393 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| RB1 | 1-234-370-21 | s | RES, NETWORK 22 (1005X4) |
| S1 | 1-771-709-41 | s | SWITCH, SLIDE |
| X2 | 1-813-530-11 | s | OSCILLATOR, CRYSTAL (VCXO) 3.3 |

---

TG-247 BOARD

---

*1: [Board No. suffix 11]
*2: [Board No. suffix 21]
*3: [Board No. suffix 22-]

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| 1pc | A-1159-992-A | s | MOUNTED CIRCUIT BOARD, TG-247G (GOLD) |
| | A-1126-983-A | s | MOUNTED CIRCUIT BOARD, TG-247 (SILVER) |
| C1 | 1-126-391-11 | s | CAPACITOR ELECT 47MF/6.3V(105) |
| C2 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C3 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C4 | 1-165-884-91 | s | CAPACITOR, CERAMIC 2.2MF(1608) |
| C5 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C6 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C7 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C8 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C9 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C10 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C11 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C12 | 1-164-850-11 | s | CAPACITOR,CHIP CERAMIC 10PF/50 |
| C13 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C14 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C15 | 1-165-872-21 | s | CAPACITOR,SOLID ELECT 47MF |
| C16 | 1-165-872-21 | s | CAPACITOR,SOLID ELECT 47MF |
| C17 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C18 | 1-165-872-21 | s | CAPACITOR,SOLID ELECT 47MF |
| C19 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C20 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C21 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C22 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C23 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C24 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C25 | 1-126-395-11 | s | CAPACITOR,ELECT 22MF/16V(CHIP) |
| C26 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C27 | 1-165-884-91 | s | CAPACITOR, CERAMIC 2.2MF(1608) |
| C28 | 1-165-884-91 | s | CAPACITOR, CERAMIC 2.2MF(1608) |
| C29 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C30 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C31 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C32 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C33 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C34 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C35 | 1-126-391-11 | s | CAPACITOR ELECT 47MF/6.3V(105) |
| C36 | 1-165-884-91 | s | CAPACITOR, CERAMIC 2.2MF(1608) |
| C37 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C38 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C39 | 1-165-872-21 | s | CAPACITOR,SOLID ELECT 47MF |
| C40 | 1-165-872-21 | s | CAPACITOR,SOLID ELECT 47MF |
| C41 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C42 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C43 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C44 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C45 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C46 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C49 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C51 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C54 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C55 | 1-165-884-91 | s | CAPACITOR, CERAMIC 2.2MF(1608) |
| C56 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C57 | 1-165-872-21 | s | CAPACITOR,SOLID ELECT 47MF |
| C58 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |

(TG-247 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C59 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C60 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C61 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C62 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C63 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C64 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C65 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C66 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C67 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C68 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C69 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C70 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C71 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C72 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C73 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C74 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C75 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C76 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C77 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C78 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C79 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C80 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C81 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C82 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C83 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C84 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C86 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C87 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C88 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C89 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C90 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C91 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C92 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C93 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C94 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C95 | 1-165-871-11 | s | CAPACITOR,ELECT 22MF |
| C96 | 1-165-871-11 | s | CAPACITOR,ELECT 22MF |
| C97 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C98 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C99 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C100 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C101 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C102 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C103 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C104 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C105 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C106 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C107 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C108 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C109 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C110 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C111 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C112 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C113 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C114 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C115 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C116 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C117 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C118 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |

(TG-247 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C119 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C120 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C121 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C122 | 1-165-871-11 | s | CAPACITOR,ELECT 22MF |
| C123 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C124 | 1-165-871-11 | s | CAPACITOR,ELECT 22MF |
| C129 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C130 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C131 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C132 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C133 | 1-165-871-11 | s | CAPACITOR,ELECT 22MF |
| C134 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C135 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C136 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C137 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C138 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C141 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C146 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C147 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C148 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C149 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C150 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C151 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C152 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C153 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C154 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C155 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C156 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C157 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C158 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C159 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C162 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C167 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C168 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C169 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C170 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C171 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C172 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C173 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C174 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C177 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C182 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C183 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C184 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C185 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C186 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C187 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C188 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C189 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C190 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C191 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C192 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C193 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C194 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C195 | 1-165-884-91 | s | CAPACITOR, CERAMIC 2.2MF(1608) |
| C201 | 1-164-842-11 | s | CAPACITOR CERAMIC 2PF/16V 1005 |
| C202 *1,2 | 1-165-908-11 | s | CAP, CERAMIC 1MF B 1608 |
| *3 | 1-112-298-91 | o | CAP, CERAMIC 1MF B (1608) |
| C203 | 1-165-176-11 | s | CAPACITOR,CERAMIC 47000PF/16V |

(TG-247 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C204 *1,2 | 1-165-908-11 | s | CAP, CERAMIC 1MF B 1608 |
| *3 | 1-112-298-91 | o | CAP, CERAMIC 1MF B (1608) |
| C205 | 1-165-176-11 | s | CAPACITOR,CERAMIC 47000PF/16V |
| C206 *1,2 | 1-165-908-11 | s | CAP, CERAMIC 1MF B 1608 |
| *3 | 1-112-298-91 | o | CAP, CERAMIC 1MF B (1608) |
| C207 | 1-165-176-11 | s | CAPACITOR,CERAMIC 47000PF/16V |
| C208 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C209 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C210 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C211 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C212 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C213 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C214 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C215 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C216 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C217 *1 | 1-125-777-81 | s | CERAMIC CHIP 0.1UF 10.00% 10V |
| C218 *1 | 1-125-777-81 | s | CERAMIC CHIP 0.1UF 10.00% 10V |
| C219 *1 | 1-125-777-81 | s | CERAMIC CHIP 0.1UF 10.00% 10V |
| C220 | 1-164-850-11 | s | CAPACITOR,CHIP CERAMIC 10PF/50 |
| C221 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| CN1 | 1-778-451-31 | s | CONNECTOR, FFC/FPC(ZIF) AN 50P (GOLD) |
| | 1-778-451-11 | o | CONNECTOR, FPC (50P) (SILVER) |
| CN2 | 1-764-080-21 | o | PIN, CONNECTOR (PC BOARD) 8P |
| CN3 | 1-770-449-21 | o | CONNECTOR, BOARD TO BOARD 70P |
| D1 | 8-719-989-03 | s | DIODE DAN222 |
| E1 | 1-535-877-22 | s | CHIP,CHECKER (TEST POINT) |
| IC1 | 6-706-482-01 | s | IC TC7SH00FU(T5RSOYJF) |
| IC2 | 6-706-482-01 | s | IC TC7SH00FU(T5RSOYJF) |
| IC3 *1,2 | 8-759-669-75 | s | IC TLC2932IPWR |
| *3 | 6-709-647-01 | s | IC TLC2932AIPWR |
| IC4 | 6-704-976-01 | s | IC ADR381ART-REEL7 |
| IC5 | 8-759-685-33 | s | IC BU2500FV-E2 |
| IC6 | 6-700-387-01 | s | IC EPC2LC20-TP |
| IC7 | 8-759-573-97 | s | IC SN74LVC541APWR |
| IC8 *1,2 | 8-759-669-69 | s | IC TLC7733IPWR-12 |
| *3 | 6-704-571-01 | s | IC TLC7703IPWR |
| IC10 | 8-759-669-66 | s | IC TLC272CPWR |
| IC11 | 8-759-327-01 | s | IC NJM062V-TE2 |
| IC12 | 6-706-491-01 | s | IC TC7SH86FU(T5RSOYJF) |
| IC13 | 6-706-491-01 | s | IC TC7SH86FU(T5RSOYJF) |
| IC14 | 8-759-327-01 | s | IC NJM062V-TE2 |
| IC15 | 8-759-327-01 | s | IC NJM062V-TE2 |
| IC16 | 8-759-327-01 | s | IC NJM062V-TE2 |
| IC18 *1,2 | 8-759-585-28 | s | IC CY62256VLL-70ZXC-T2 |
| *3 | 6-711-696-01 | s | IC CY62256VNLL-70ZXCT |
| IC19 | 8-759-327-01 | s | IC NJM062V-TE2 |
| IC20 | 6-706-358-01 | s | IC AD5424YCPZ-REEL7 |
| IC21 | 8-759-561-46 | s | IC AD8014ART-REEL7 |
| IC22 | 6-704-099-01 | f | IC TC7WZ08FK(TE85R) |
| IC23 | 6-705-673-01 | s | IC TC7PA53FU(TE85L.F) |
| IC24 | 6-705-673-01 | s | IC TC7PA53FU(TE85L.F) |
| IC25 | 8-759-561-46 | s | IC AD8014ART-REEL7 |
| IC26 | 8-759-561-46 | s | IC AD8014ART-REEL7 |
| IC27 | 6-704-099-01 | f | IC TC7WZ08FK(TE85R) |
| IC28 | 6-705-673-01 | s | IC TC7PA53FU(TE85L.F) |
| IC29 | 6-705-673-01 | s | IC TC7PA53FU(TE85L.F) |
| IC30 | 8-759-561-46 | s | IC AD8014ART-REEL7 |

(TG-247 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| IC31 | 8-759-561-46 | s | IC AD8014ART-REEL7 |
| IC32 | 6-704-099-01 | f | IC TC7WZ08FK(TE85R) |
| IC33 | 6-705-673-01 | s | IC TC7PA53FU(TE85L.F) |
| IC34 | 6-705-673-01 | s | IC TC7PA53FU(TE85L.F) |
| IC35 | 8-759-561-46 | s | IC AD8014ART-REEL7 |
| IC36 | 8-759-561-46 | s | IC AD8014ART-REEL7 |
| IC37 | 8-759-560-62 | s | IC TC7WH32FU-TE12R |
| IC38 | 8-759-557-86 | s | IC NC7SZ86P5X |
| IC39 | 6-704-912-01 | s | IC CAT24WC256XI-TE13 |
| IC40 | 8-759-562-42 | s | IC CAT24WC08J-TE13 |
| IC41 | 8-759-669-67 | s | IC TL074CPWR-12 |
| IC42 | 8-759-561-46 | s | IC AD8014ART-REEL7 |
| IC43 | 8-759-561-46 | s | IC AD8014ART-REEL7 |
| IC44 | 8-759-327-01 | s | IC NJM062V-TE2 |
| IC45 | 8-759-327-01 | s | IC NJM062V-TE2 |
| IC46 | 6-708-326-01 | s | IC TC74HCT4053AFT(EL) |
| IC47 | 8-759-592-47 | s | IC TC7SZ08FU(TE85R) |
| L1 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |
| L2 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |
| L3 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |
| L4 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |
| L5 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |
| L6 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |
| L7 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |
| L8 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |
| L9 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |
| L10 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |
| L12 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |
| L13 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |
| L14 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L15 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |
| L16 | 1-416-948-21 | s | COIL, CHOKE (SMD) |
| L17 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |
| Q1 | 8-729-143-13 | s | TRANSISTOR 2SC4176-B34 |
| Q2 | 8-729-143-13 | s | TRANSISTOR 2SC4176-B34 |
| Q3 | 8-729-230-27 | s | TRANSISTOR 2SA1213Y-TE12L |
| Q4 | 8-729-230-27 | s | TRANSISTOR 2SA1213Y-TE12L |
| Q5 | 8-729-143-13 | s | TRANSISTOR 2SC4176-B34 |
| Q6 | 8-729-230-27 | s | TRANSISTOR 2SA1213Y-TE12L |
| Q7 | 8-729-143-13 | s | TRANSISTOR 2SC4176-B34 |
| Q8 | 8-729-143-07 | s | TRANSISTOR 2SA1610-Y33 |
| Q9 | 8-729-230-27 | s | TRANSISTOR 2SA1213Y-TE12L |
| Q10 | 8-729-807-51 | s | TRANSISTOR 2SD1623-S |
| Q11 | 8-729-143-13 | s | TRANSISTOR 2SC4176-B34 |
| Q12 | 8-729-230-27 | s | TRANSISTOR 2SA1213Y-TE12L |
| R1 *1,2 | 1-218-961-11 | s | RESISTOR, CHIP 4.7K 1/16W |
| *3 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R2 *1,2 | 1-218-961-11 | s | RESISTOR, CHIP 4.7K 1/16W |
| *3 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R3 | 1-208-703-11 | s | RESISTOR,CHIP 6.8K 1/16W(1005) |
| R4 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R5 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R6 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R7 *1,2 | 1-218-953-11 | s | RESISTOR, CHIP 1K 1/16W |
| *3 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R8 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R9 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R10 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |

(TG-247 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R11 | 1-208-687-11 | s | RESISTOR CHIP 1.5K 1/16W (1005 |
| R12 | 1-208-703-11 | s | RESISTOR,CHIP 6.8K 1/16W(1005) |
| R13 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R14 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R15 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R16 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R17 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R18 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R19 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R20 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R21 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R22 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R23 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R24 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R25 | 1-243-975-11 | s | RESISTOR, CHIP 4.7M |
| R26 | 1-208-687-11 | s | RESISTOR CHIP 1.5K 1/16W (1005 |
| R27 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R28 | 1-208-703-11 | s | RESISTOR,CHIP 6.8K 1/16W(1005) |
| R29 | 1-208-679-11 | s | RESISTOR CHIP 680 1/16W (1005) |
| R30 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R31 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R32 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R33 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R34 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R35 *1,2 | 1-208-713-11 | s | RESISTOR CHIP 18K 1/16W (1005) |
| *3 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R36 | 1-208-709-11 | s | RESISTOR CHIP 12K 1/16W (1005) |
| R37 | 1-208-711-11 | s | RESISTOR CHIP 15K 1/16W (1005) |
| R38 *1,2 | 1-208-691-11 | s | RESISTOR CHIP 2.2K 1/16W(1005) |
| *3 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R39 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R40 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R41 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R42 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R43 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R44 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R45 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R46 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R47 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R48 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R49 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R50 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R59 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R60 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R61 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R62 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R63 | 1-208-893-11 | s | RESISTOR, CHIP 1.8K (1005) |
| R64 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R65 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R66 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R67 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R69 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R70 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R71 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R73 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R74 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R76 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R77 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R79 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |

(TG-247 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R81 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R83 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R84 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R85 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R86 | 1-208-643-11 | s | RESISTOR CHIP 22 1/16W (1005) |
| R87 *2 | 1-208-931-81 | s | METAL CHIP 68K 0.5% 1/16W |
| R88 *2 | 1-208-931-81 | s | METAL CHIP 68K 0.5% 1/16W |
| R99 | 1-208-643-11 | s | RESISTOR CHIP 22 1/16W (1005) |
| R120 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R121 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R122 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R123 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R124 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R125 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R126 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R127 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R128 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R129 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R130 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R131 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R132 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R133 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R134 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R135 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R136 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R137 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R138 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R139 *1,2 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R140 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R141 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R142 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R143 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R144 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R145 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R146 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R147 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R148 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R149 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R150 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R151 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R152 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R153 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R155 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R157 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R158 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R159 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R160 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R161 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R162 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R163 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R164 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R165 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R166 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R167 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R168 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R169 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R170 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R171 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R172 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R173 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |

(TG-247 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R174 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R175 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R176 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R177 *1 | 1-218-945-11 | s | METAL CHIP 220 0.5% 1/16W |
| *2 | 1-208-875-81 | s | METAL CHIP 330 0.5% 1/16W |
| R178 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R179 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R180 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R181 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R182 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R183 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R184 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R185 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R186 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R187 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005 |
| R188 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R189 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R190 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R194 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R200 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R201 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R202 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R206 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R207 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R208 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R209 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R210 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R211 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R212 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R213 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R214 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R215 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R216 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R217 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R219 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R220 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R221 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R222 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R223 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R227 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R229 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R230 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R231 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R232 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R234 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R235 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R236 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R237 | 1-208-691-11 | s | RESISTOR CHIP 2.2K 1/16W(1005) |
| R238 | 1-208-691-11 | s | RESISTOR CHIP 2.2K 1/16W(1005) |
| R239 | 1-208-691-11 | s | RESISTOR CHIP 2.2K 1/16W(1005) |
| R240 | 1-208-675-11 | s | RESISTOR CHIP 470 1/16W (1005) |
| R241 | 1-208-675-11 | s | RESISTOR CHIP 470 1/16W (1005) |
| R242 | 1-208-675-11 | s | RESISTOR CHIP 470 1/16W (1005) |
| R243 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R244 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R245 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R246 | 1-208-860-11 | s | RESISTOR CHIP 75 1/16W (1005) |
| R247 | 1-208-647-11 | s | RESISTOR CHIP 33 1/16W (1005) |
| R248 | 1-208-647-11 | s | RESISTOR CHIP 33 1/16W (1005) |
| R249 | 1-208-647-11 | s | RESISTOR CHIP 33 1/16W (1005) |

(TG-247 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R250 | 1-208-923-11 | s | RESISTOR, CHIP 33K (1005) |
| R251 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R252 | 1-208-679-11 | s | RESISTOR CHIP 680 1/16W (1005) |
| R253 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R254 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R255 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R256 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R257 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R258 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R259 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R262 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R263 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R268 | 1-208-711-11 | s | RESISTOR CHIP 15K 1/16W (1005) |
| R269 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R270 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R271 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R272 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R273 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R274 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R275 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R276 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R277 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R278 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R279 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R280 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R281 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R282 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R283 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R284 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R285 | 1-208-643-11 | s | RESISTOR CHIP 22 1/16W (1005) |
| R286 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R287 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R288 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R289 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R290 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R292 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R293 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R294 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R295 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R302 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R303 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R304 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R305 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R306 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R307 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R308 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R309 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R310 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R311 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R312 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R313 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R314 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R315 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R316 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R317 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R318 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R319 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R322 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R323 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R328 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |

(TG-247 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R329 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R330 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R331 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R332 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R333 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R334 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R335 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R336 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R337 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R338 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R339 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R340 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R341 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R342 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R343 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R344 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R345 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R346 | 1-216-864-11 | s | CONDUCTOR, CHIP (1608) |
| R348 | 1-216-864-11 | s | CONDUCTOR, CHIP (1608) |
| R350 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R352 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R354 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R358 | 1-208-691-11 | s | RESISTOR CHIP 2.2K 1/16W(1005) |
| R359 | 1-208-691-11 | s | RESISTOR CHIP 2.2K 1/16W(1005) |
| R361 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R363 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R364 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R365 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R367 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R369 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R371 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R373 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R375 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R377 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R379 | 1-218-985-11 | s | RESISTOR CHIP 470K 1/16W(1005) |
| R380 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R382 | 1-218-985-11 | s | RESISTOR CHIP 470K 1/16W(1005) |
| R383 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R385 | 1-218-985-11 | s | RESISTOR CHIP 470K 1/16W(1005) |
| R387 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R388 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R389 | 1-208-931-11 | s | RESISTOR, CHIP 68K (1005) |
| R390 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R391 | 1-208-931-11 | s | RESISTOR, CHIP 68K (1005) |
| R392 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R393 | 1-208-931-11 | s | RESISTOR, CHIP 68K (1005) |
| R394 | 1-208-635-11 | s | RESISTOR CHIP 10 1/16W (1005) |
| R395 | 1-208-691-11 | s | RESISTOR CHIP 2.2K 1/16W(1005) |
| R397 | 1-208-691-11 | s | RESISTOR CHIP 2.2K 1/16W(1005) |
| R399 | 1-208-691-11 | s | RESISTOR CHIP 2.2K 1/16W(1005) |
| R400 | 1-215-465-00 | s | RESISTOR,METAL FILM 68K 1/4W |
| R401 | 1-215-465-00 | s | RESISTOR,METAL FILM 68K 1/4W |
| RB1 | 1-234-370-11 | s | RES, NETWORK 22X4 (1005) |
| S1 | 1-771-709-31 | s | SWITCH, SLIDE |
| X1 | 1-813-529-11 | s | OSCILLATOR, CRYSTAL (VCXO) 3.3 |
| X2 | 1-813-530-11 | s | OSCILLATOR, CRYSTAL (VCXO) 3.3 |

---

TR-136 BOARD

---

*1: [Board No. suffix 13]
*2: [Board No. suffix 14]
*3: [Board No. suffix 15-]

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| 1pc | A-1142-715-A | s | MOUNTED CIRCUIT BOARD, TR-136 |
| C1 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C2 | 1-135-342-21 | s | CAP, ELECT 56MF (6.3X6) |
| C3 | 1-135-342-21 | s | CAP, ELECT 56MF (6.3X6) |
| C4 | 1-164-874-81 | s | CAP,CHIP CERAMIC 100PF CH 1005 |
| C5 | 1-164-874-81 | s | CAP,CHIP CERAMIC 100PF CH 1005 |
| C6 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C7 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C8 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C9 | 1-165-870-21 | s | CAP, ELECT 100MF (6.3X6) |
| C10 | 1-165-870-21 | s | CAP, ELECT 100MF (6.3X6) |
| C11 | 1-128-589-21 | s | CAP, CHIP ELECT 47MF |
| C12 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C13 | 1-128-589-21 | s | CAP, CHIP ELECT 47MF |
| C14 | 1-128-589-21 | s | CAP, CHIP ELECT 47MF |
| C21 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C22 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C31 | 1-128-589-21 | s | CAP, CHIP ELECT 47MF |
| C32 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C33 | 1-128-589-21 | s | CAP, CHIP ELECT 47MF |
| C34 | 1-128-589-21 | s | CAP, CHIP ELECT 47MF |
| C41 | 1-125-827-91 | s | CAP, CHIP CERAMIC 1MF B |
| C42 | 1-100-165-21 | s | CAP, ELECT 47MF (8X7) |
| C43 | 1-164-874-81 | s | CAP,CHIP CERAMIC 100PF CH 1005 |
| C44 | 1-164-874-81 | s | CAP,CHIP CERAMIC 100PF CH 1005 |
| C45 | 1-164-874-81 | s | CAP,CHIP CERAMIC 100PF CH 1005 |
| C46 | 1-126-394-21 | s | CAP, CHIP ELECT 10MF (4X5.7) |
| C47 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C48 | 1-164-874-81 | s | CAP,CHIP CERAMIC 100PF CH 1005 |
| C49 *1 | 1-126-394-21 | s | ELECT CHIP 10UF 20.00% 16V |
| *2 | 1-117-145-21 | s | ELECT CHIP 1UF 20.00% 50V |
| C50 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| C51 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C52 | 1-100-165-21 | s | CAP, ELECT 47MF (8X7) |
| C53 | 1-165-870-21 | s | CAP, ELECT 100MF (6.3X6) |
| C61 *3 | 1-164-874-81 | s | CERAMIC CHIP 100PF |
| C62 *3 | 1-164-874-81 | s | CERAMIC CHIP 100PF |
| C92 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C93 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C94 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C95 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C101 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C102 | 1-127-692-91 | s | CAP, CHIP CERAMIC 10MF B 3225 |
| C103 | 1-164-862-81 | s | CAP, CHIP CERAMIC 33PF CH 1005 |
| C104 | 1-164-862-81 | s | CAP, CHIP CERAMIC 33PF CH 1005 |
| C105 *1 | 1-100-567-81 | s | CERAMIC CHIP 10000PF 10% 25V |
| *2 | 1-100-506-91 | s | CERAMIC CHIP 1UF 20% 6.3V |
| C106 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C107 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C108 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C109 | 1-164-882-81 | s | CAP,CHIP CERAMIC 220PF CH 1005 |
| C110 | 1-164-937-81 | s | CAP, CHIPCERAMIC 1000PF B 1005 |
| C111 | 1-127-692-91 | s | CAP, CHIP CERAMIC 10MF B 3225 |
| C112 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| C113 | 1-127-692-91 | s | CAP, CHIP CERAMIC 10MF B 3225 |

(TR-136 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C114 | 1-164-870-81 | s | CAP, CHIP CERAMIC 68PF CH 1005 |
| C115 | 1-164-862-81 | s | CAP, CHIP CERAMIC 33PF CH 1005 |
| C116 | 1-164-850-81 | s | CAP, CHIP CERAMIC 10PF CH 1005 |
| C117 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C118 | 1-164-934-81 | s | CAP, CHIP CERAMIC 330PF B 1005 |
| C119 | 1-164-870-81 | s | CAP, CHIP CERAMIC 68PF CH 1005 |
| C120 | 1-164-882-81 | s | CAP,CHIP CERAMIC 220PF CH 1005 |
| C121 | 1-127-692-91 | s | CAP, CHIP CERAMIC 10MF B 3225 |
| C122 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C126 *1 | 1-100-055-21 | s | CERAMIC CHIP 22UF 20% 16V |
| *2 | 1-100-620-91 | s | CERAMIC CHIP 47UF 20% 6.3V |
| C127 | 1-126-402-21 | s | CAP, CHIP ELECT 2.2MF (4X5.7) |
| C128 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C129 | 1-164-858-81 | s | CAP, CHIP CERAMIC 22PF CH 1005 |
| C130 | 1-164-874-81 | s | CAP,CHIP CERAMIC 100PF CH 1005 |
| C131 | 1-164-870-81 | s | CAP, CHIP CERAMIC 68PF CH 1005 |
| C132 | 1-164-870-81 | s | CAP, CHIP CERAMIC 68PF CH 1005 |
| C133 | 1-164-862-81 | s | CAP, CHIP CERAMIC 33PF CH 1005 |
| C134 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C135 | 1-164-934-81 | s | CAP, CHIP CERAMIC 330PF B 1005 |
| C136 | 1-164-870-81 | s | CAP, CHIP CERAMIC 68PF CH 1005 |
| C137 | 1-164-882-81 | s | CAP,CHIP CERAMIC 220PF CH 1005 |
| C138 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C141 *1 | 1-100-055-21 | s | CERAMIC CHIP 22UF 20% 16V |
| *2 | 1-100-620-91 | s | CERAMIC CHIP 47UF 20% 6.3V |
| C142 | 1-126-402-21 | s | CAP, CHIP ELECT 2.2MF (4X5.7) |
| C143 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C144 | 1-164-858-81 | s | CAP, CHIP CERAMIC 22PF CH 1005 |
| C145 | 1-164-874-81 | s | CAP,CHIP CERAMIC 100PF CH 1005 |
| C146 | 1-164-866-81 | s | CAP, CHIP CERAMIC 47PF CH 1005 |
| C147 | 1-164-870-81 | s | CAP, CHIP CERAMIC 68PF CH 1005 |
| C148 | 1-164-858-81 | s | CAP, CHIP CERAMIC 22PF CH 1005 |
| C149 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C150 | 1-164-934-81 | s | CAP, CHIP CERAMIC 330PF B 1005 |
| C151 | 1-164-870-81 | s | CAP, CHIP CERAMIC 68PF CH 1005 |
| C152 | 1-164-882-81 | s | CAP,CHIP CERAMIC 220PF CH 1005 |
| C153 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C156 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C157 | 1-117-141-21 | s | CAP, ELECT 0.1MF |
| C158 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C159 | 1-164-870-81 | s | CAP, CHIP CERAMIC 68PF CH 1005 |
| C161 | 1-164-870-81 | s | CAP, CHIP CERAMIC 68PF CH 1005 |
| C162 | 1-164-870-81 | s | CAP, CHIP CERAMIC 68PF CH 1005 |
| C163 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C164 | 1-164-934-81 | s | CAP, CHIP CERAMIC 330PF B 1005 |
| C165 | 1-164-870-81 | s | CAP, CHIP CERAMIC 68PF CH 1005 |
| C166 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C167 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C171 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C172 | 1-117-141-21 | s | CAP, ELECT 0.1MF |
| C173 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C174 | 1-164-870-81 | s | CAP, CHIP CERAMIC 68PF CH 1005 |
| C175 | 1-164-866-81 | s | CAP, CHIP CERAMIC 47PF CH 1005 |
| C176 | 1-164-866-81 | s | CAP, CHIP CERAMIC 47PF CH 1005 |
| C177 | 1-164-862-81 | s | CAP, CHIP CERAMIC 33PF CH 1005 |
| C178 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C179 | 1-164-934-81 | s | CAP, CHIP CERAMIC 330PF B 1005 |
| C180 | 1-164-870-81 | s | CAP, CHIP CERAMIC 68PF CH 1005 |
| C181 | 1-164-882-81 | s | CAP,CHIP CERAMIC 220PF CH 1005 |

(TR-136 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C182 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C186 | 1-127-820-91 | s | CAP, CHIP CERAMIC 4.7MF B 3216 |
| C187 | 1-127-820-91 | s | CAP, CHIP CERAMIC 4.7MF B 3216 |
| C188 | 1-164-845-81 | s | CAP, CHIP CERAMIC 5PF CH 1005 |
| C189 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C190 | 1-127-820-91 | s | CAP, CHIP CERAMIC 4.7MF B 3216 |
| C191 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C192 | 1-164-845-81 | s | CAP, CHIP CERAMIC 5PF CH 1005 |
| C193 | 1-127-692-91 | s | CAP, CHIP CERAMIC 10MF B 3225 |
| C194 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C201 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C202 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C203 | 1-164-937-81 | s | CAP, CHIPCERAMIC 1000PF B 1005 |
| C204 | 1-164-937-81 | s | CAP, CHIPCERAMIC 1000PF B 1005 |
| C205 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C208 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C209 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C210 | 1-100-620-91 | s | CAP, CHIP CERAMIC 47MF B(3225) |
| C211 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| C212 | 1-164-874-81 | s | CAP,CHIP CERAMIC 100PF CH 1005 |
| C213 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C214 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C215 | 1-125-889-91 | s | CAP, CHIP CERAMIC 2.2MF B 2012 |
| C217 | 1-164-882-81 | s | CAP,CHIP CERAMIC 220PF CH 1005 |
| C218 | 1-164-866-81 | s | CAP, CHIP CERAMIC 47PF CH 1005 |
| C219 | 1-164-934-81 | s | CAP, CHIP CERAMIC 330PF B 1005 |
| C220 | 1-164-870-81 | s | CAP, CHIP CERAMIC 68PF CH 1005 |
| C221 | 1-164-870-81 | s | CAP, CHIP CERAMIC 68PF CH 1005 |
| C222 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| C223 | 1-127-692-91 | s | CAP, CHIP CERAMIC 10MF B 3225 |
| C224 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| C225 | 1-127-820-91 | s | CAP, CHIP CERAMIC 4.7MF B 3216 |
| C226 | 1-164-870-81 | s | CAP, CHIP CERAMIC 68PF CH 1005 |
| C231 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| C232 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C233 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C234 | 1-100-620-91 | s | CAP, CHIP CERAMIC 47MF B(3225) |
| C235 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| C236 | 1-164-874-81 | s | CAP,CHIP CERAMIC 100PF CH 1005 |
| C237 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C238 | 1-125-889-91 | s | CAP, CHIP CERAMIC 2.2MF B 2012 |
| C239 | 1-125-889-91 | s | CAP, CHIP CERAMIC 2.2MF B 2012 |
| C240 | 1-164-862-81 | s | CAP, CHIP CERAMIC 33PF CH 1005 |
| C241 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C242 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C243 | 1-164-937-81 | s | CAP, CHIPCERAMIC 1000PF B 1005 |
| C245 | 1-164-934-81 | s | CAP, CHIP CERAMIC 330PF B 1005 |
| C246 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| C247 | 1-164-937-81 | s | CAP, CHIPCERAMIC 1000PF B 1005 |
| C248 | 1-126-391-21 | s | CAP, CHIP ELECT 47MF (5X5.7) |
| C249 | 1-164-878-81 | s | CAP,CHIP CERAMIC 150PF CH 1005 |
| C256 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C257 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C258 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C259 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C260 | 1-100-620-91 | s | CAP, CHIP CERAMIC 47MF B(3225) |
| C261 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| C262 | 1-164-874-81 | s | CAP,CHIP CERAMIC 100PF CH 1005 |
| C263 | 1-100-620-91 | s | CAP, CHIP CERAMIC 47MF B(3225) |

(TR-136 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C264 | 1-100-620-91 | s | CAP, CHIP CERAMIC 47MF B(3225) |
| C265 | 1-125-889-91 | s | CAP, CHIP CERAMIC 2.2MF B 2012 |
| C266 | 1-125-889-91 | s | CAP, CHIP CERAMIC 2.2MF B 2012 |
| C267 | 1-164-862-81 | s | CAP, CHIP CERAMIC 33PF CH 1005 |
| C268 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C269 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C270 | 1-164-937-81 | s | CAP, CHIPCERAMIC 1000PF B 1005 |
| C272 | 1-164-934-81 | s | CAP, CHIP CERAMIC 330PF B 1005 |
| C273 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C274 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C275 | 1-164-937-81 | s | CAP, CHIPCERAMIC 1000PF B 1005 |
| C276 | 1-164-878-81 | s | CAP,CHIP CERAMIC 150PF CH 1005 |
| C281 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C282 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C283 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C284 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C285 | 1-100-620-91 | s | CAP, CHIP CERAMIC 47MF B(3225) |
| C286 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| C287 | 1-164-874-81 | s | CAP,CHIP CERAMIC 100PF CH 1005 |
| C288 | 1-100-620-91 | s | CAP, CHIP CERAMIC 47MF B(3225) |
| C289 | 1-100-620-91 | s | CAP, CHIP CERAMIC 47MF B(3225) |
| C290 | 1-125-889-91 | s | CAP, CHIP CERAMIC 2.2MF B 2012 |
| C291 | 1-125-889-91 | s | CAP, CHIP CERAMIC 2.2MF B 2012 |
| C292 | 1-164-862-81 | s | CAP, CHIP CERAMIC 33PF CH 1005 |
| C293 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C294 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C295 | 1-164-937-81 | s | CAP, CHIPCERAMIC 1000PF B 1005 |
| C297 | 1-164-934-81 | s | CAP, CHIP CERAMIC 330PF B 1005 |
| C298 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C299 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C300 | 1-164-937-81 | s | CAP, CHIPCERAMIC 1000PF B 1005 |
| C301 | 1-164-878-81 | s | CAP,CHIP CERAMIC 150PF CH 1005 |
| C306 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C307 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C308 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C309 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C310 | 1-100-620-91 | s | CAP, CHIP CERAMIC 47MF B(3225) |
| C311 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| C312 | 1-164-874-81 | s | CAP,CHIP CERAMIC 100PF CH 1005 |
| C313 | 1-100-620-91 | s | CAP, CHIP CERAMIC 47MF B(3225) |
| C314 | 1-100-620-91 | s | CAP, CHIP CERAMIC 47MF B(3225) |
| C315 | 1-125-889-91 | s | CAP, CHIP CERAMIC 2.2MF B 2012 |
| C316 | 1-125-889-91 | s | CAP, CHIP CERAMIC 2.2MF B 2012 |
| C317 | 1-164-862-81 | s | CAP, CHIP CERAMIC 33PF CH 1005 |
| C318 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C319 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C320 | 1-164-937-81 | s | CAP, CHIPCERAMIC 1000PF B 1005 |
| C322 | 1-164-934-81 | s | CAP, CHIP CERAMIC 330PF B 1005 |
| C323 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C324 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C325 | 1-164-937-81 | s | CAP, CHIPCERAMIC 1000PF B 1005 |
| C326 | 1-164-878-81 | s | CAP,CHIP CERAMIC 150PF CH 1005 |
| C401 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| C402 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| C403 | 1-164-939-81 | s | CAP, CHIPCERAMIC 2200PF B 1005 |
| C404 | 1-164-939-81 | s | CAP, CHIPCERAMIC 2200PF B 1005 |
| C405 | 1-164-850-81 | s | CAP, CHIP CERAMIC 10PF CH 1005 |
| C407 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C408 | 1-127-760-91 | s | CAP, CHIP CERAMIC 4.7MF B 2012 |

(TR-136 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C409 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C410 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C411 | 1-127-760-91 | s | CAP, CHIP CERAMIC 4.7MF B 2012 |
| C412 | 1-164-935-81 | s | CAP, CHIP CERAMIC 470PF B 1005 |
| C413 | 1-164-937-81 | s | CAP, CHIPCERAMIC 1000PF B 1005 |
| C414 | 1-127-760-91 | s | CAP, CHIP CERAMIC 4.7MF B 2012 |
| C415 | 1-164-935-81 | s | CAP, CHIP CERAMIC 470PF B 1005 |
| C416 | 1-164-937-81 | s | CAP, CHIPCERAMIC 1000PF B 1005 |
| C417 | 1-107-826-91 | s | CAP, CHIP CERAMIC 100000PF B |
| C418 | 1-104-607-21 | s | CAP, CHIP ELECT 47MF |
| C419 | 1-128-589-21 | s | CAP, CHIP ELECT 47MF |
| C420 | 1-127-760-91 | s | CAP, CHIP CERAMIC 4.7MF B 2012 |
| C422 | 1-164-937-81 | s | CAP, CHIPCERAMIC 1000PF B 1005 |
| C423 | 1-164-935-81 | s | CAP, CHIP CERAMIC 470PF B 1005 |
| C425 | 1-128-589-21 | s | CAP, CHIP ELECT 47MF |
| C431 | 1-164-850-81 | s | CAP, CHIP CERAMIC 10PF CH 1005 |
| C432 | 1-164-939-81 | s | CAP, CHIPCERAMIC 2200PF B 1005 |
| C433 | 1-164-939-81 | s | CAP, CHIPCERAMIC 2200PF B 1005 |
| C434 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C435 | 1-127-760-91 | s | CAP, CHIP CERAMIC 4.7MF B 2012 |
| C436 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C437 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C438 | 1-127-760-91 | s | CAP, CHIP CERAMIC 4.7MF B 2012 |
| C439 | 1-164-935-81 | s | CAP, CHIP CERAMIC 470PF B 1005 |
| C440 | 1-164-937-81 | s | CAP, CHIPCERAMIC 1000PF B 1005 |
| C441 | 1-127-760-91 | s | CAP, CHIP CERAMIC 4.7MF B 2012 |
| C442 | 1-164-937-81 | s | CAP, CHIPCERAMIC 1000PF B 1005 |
| C443 | 1-164-935-81 | s | CAP, CHIP CERAMIC 470PF B 1005 |
| C444 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| C445 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| C451 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| C452 | 1-100-352-91 | s | CAP, CERAMIC 1MF C (1608) |
| C453 | 1-164-850-81 | s | CAP, CHIP CERAMIC 10PF CH 1005 |
| C454 | 1-164-939-81 | s | CAP, CHIPCERAMIC 2200PF B 1005 |
| C455 | 1-164-939-81 | s | CAP, CHIPCERAMIC 2200PF B 1005 |
| C456 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C457 | 1-127-760-91 | s | CAP, CHIP CERAMIC 4.7MF B 2012 |
| C458 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C459 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C501 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C502 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C503 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C504 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C505 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C506 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C507 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C508 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C509 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C510 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C511 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C512 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C513 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C514 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C515 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C516 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C517 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C518 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C519 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C520 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |

(TR-136 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C521 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C522 | 1-100-506-91 | s | CAP, CERAMIC 1MF C (1005) |
| C523 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C524 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C525 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C526 | 1-165-884-91 | s | CAP, CERAMIC 2.2MF (1608) |
| C527 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C528 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C529 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C531 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C532 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C533 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C541 | 1-164-850-81 | s | CAP, CHIP CERAMIC 10PF CH 1005 |
| C542 | 1-164-850-81 | s | CAP, CHIP CERAMIC 10PF CH 1005 |
| C543 | 1-128-589-21 | s | CAP, CHIP ELECT 47MF |
| C544 | 1-164-850-81 | s | CAP, CHIP CERAMIC 10PF CH 1005 |
| C546 | 1-164-850-81 | s | CAP, CHIP CERAMIC 10PF CH 1005 |
| C547 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C548 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C549 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C550 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C552 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C553 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C554 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C555 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C556 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C557 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C558 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C559 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C560 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C561 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C562 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C563 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C564 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C565 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C566 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C601 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C602 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C603 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C604 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C605 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C606 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C607 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C608 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C609 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C610 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C611 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C612 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C613 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C614 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C615 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C616 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C617 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C618 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C619 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C620 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C621 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C622 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C623 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |

(TR-136 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C624 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C625 | 1-128-589-21 | s | CAP, CHIP ELECT 47MF |
| C626 | 1-128-589-21 | s | CAP, CHIP ELECT 47MF |
| C627 | 1-128-589-21 | s | CAP, CHIP ELECT 47MF |
| C628 | 1-128-589-21 | s | CAP, CHIP ELECT 47MF |
| C629 | 1-128-589-21 | s | CAP, CHIP ELECT 47MF |
| C630 | 1-128-589-21 | s | CAP, CHIP ELECT 47MF |
| C631 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C632 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C633 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C634 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C635 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C636 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C701 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C702 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C703 | 1-164-850-81 | s | CAP, CHIP CERAMIC 10PF CH 1005 |
| C704 | 1-164-850-81 | s | CAP, CHIP CERAMIC 10PF CH 1005 |
| C705 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C706 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C707 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C708 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C710 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C721 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C722 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C723 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C724 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C725 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C726 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C727 | 1-164-937-81 | s | CAP, CHIPCERAMIC 1000PF B 1005 |
| C728 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C729 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C730 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C731 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C732 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C733 | 1-164-850-81 | s | CAP, CHIP CERAMIC 10PF CH 1005 |
| C734 | 1-164-850-81 | s | CAP, CHIP CERAMIC 10PF CH 1005 |
| C735 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C736 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C737 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C738 | 1-126-394-21 | s | CAP, CHIP ELECT 10MF (4X5.7) |
| C739 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C761 | 1-165-884-91 | s | CAP, CERAMIC 2.2MF (1608) |
| C762 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C763 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C764 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C765 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C766 | 1-164-874-81 | s | CAP,CHIP CERAMIC 100PF CH 1005 |
| C767 | 1-164-874-81 | s | CAP,CHIP CERAMIC 100PF CH 1005 |
| C768 | 1-128-589-21 | s | CAP, CHIP ELECT 47MF |
| C769 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C801 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C802 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C803 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C804 | 1-165-884-91 | s | CAP, CERAMIC 2.2MF (1608) |
| C805 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C806 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C807 | 1-164-840-81 | s | CAP, CHIP CERAMIC 1PF CK 1005 |
| C808 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C809 | 1-165-884-91 | s | CAP, CERAMIC 2.2MF (1608) |

(TR-136 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C810 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C811 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C812 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C813 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C814 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C815 | 1-165-887-91 | s | CAP, CERAMIC 0.22MF (1005) |
| C816 | 1-165-887-91 | s | CAP, CERAMIC 0.22MF (1005) |
| C817 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C818 | 1-165-887-91 | s | CAP, CERAMIC 0.22MF (1005) |
| C819 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C820 | 1-165-887-91 | s | CAP, CERAMIC 0.22MF (1005) |
| C821 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C822 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C823 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C824 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C825 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C826 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C827 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C828 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C829 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C830 | 1-165-989-91 | s | CAP, CERAMIC 10MF (2012) |
| C831 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C832 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C833 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C834 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C851 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C852 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C853 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| C854 | 1-125-777-81 | s | CAP, CHIP CERAMIC 0.1MF B 1005 |
| CF101 | 1-813-514-11 | s | FILTER, CERAMIC (5.6MHZ) |
| CF102 | 1-813-515-11 | s | FILTER, CERAMIC (6.2MHZ) |
| CF103 | 1-813-516-11 | s | FILTER, CERAMIC (6.7MHZ) |
| CF104 | 1-578-068-12 | s | FILTER, CERAMIC |
| CF105 | 1-578-069-11 | s | FILTER, CERAMIC |
| CF201 | 1-760-443-11 | s | FILTER, CERAMIC |
| CF202 | 1-760-443-11 | s | FILTER, CERAMIC |
| CF203 | 1-760-444-11 | s | FILTER, CERAMIC |
| CF204 | 1-760-444-11 | s | FILTER, CERAMIC |
| CF205 | 1-813-513-11 | s | FILTER, CERAMIC (4.3MHZ) |
| CF206 | 1-813-513-11 | s | FILTER, CERAMIC (4.3MHZ) |
| CF207 | 1-813-429-11 | s | FILTER, CERAMIC (4.75MHZ) |
| CF208 | 1-813-429-11 | s | FILTER, CERAMIC (4.75MHZ) |
| CN2 | 1-695-930-51 | s | CONNECTOR, FPC 16P |
| CN3 | 1-764-080-21 | o | PIN, CONNECTOR (PC BOARD) 8P |
| CN101 | 1-766-703-21 | s | CONNECTOR, COAXIAL |
| CN601 | 1-766-703-21 | s | CONNECTOR, COAXIAL |
| CN602 | 1-766-703-21 | s | CONNECTOR, COAXIAL |
| D1 | 8-719-017-03 | s | DIODE 02DZ4.7-TPH3 |
| D2 | 8-719-017-03 | s | DIODE 02DZ4.7-TPH3 |
| D41 | 8-719-017-03 | s | DIODE 02DZ4.7-TPH3 |
| D42 | 8-719-421-72 | s | DIODE MA132WA-TX |
| D43 | 8-719-036-65 | s | DIODE RD2.0SB-T1 |
| D101 | 8-719-989-01 | s | DIODE DA221-TL |
| D102 | 8-719-989-01 | s | DIODE DA221-TL |
| D103 | 8-719-041-40 | s | DIODE KV1470TL00-G |
| D104 | 8-719-989-01 | s | DIODE DA221-TL |
| D105 | 8-719-041-40 | s | DIODE KV1470TL00-G |
| D106 | 8-719-989-01 | s | DIODE DA221-TL |

(TR-136 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| D107 | 8-719-041-40 | s | DIODE KV1470TL00-G |
| D108 | 8-719-989-01 | s | DIODE DA221-TL |
| D109 | 8-719-041-40 | s | DIODE KV1470TL00-G |
| D110 | 8-719-989-01 | s | DIODE DA221-TL |
| D111 | 8-719-041-40 | s | DIODE KV1470TL00-G |
| D112 | 8-719-404-50 | s | DIODE MA111-TX |
| D113 | 8-719-404-50 | s | DIODE MA111-TX |
| D201 | 8-719-989-01 | s | DIODE DA221-TL |
| D202 | 8-719-036-65 | s | DIODE RD2.0SB-T1 |
| D205 | 8-719-036-65 | s | DIODE RD2.0SB-T1 |
| D208 | 8-719-036-65 | s | DIODE RD2.0SB-T1 |
| D211 | 8-719-036-65 | s | DIODE RD2.0SB-T1 |
| D214 | 8-719-036-65 | s | DIODE RD2.0SB-T1 |
| D401 | 8-719-036-65 | s | DIODE RD2.0SB-T1 |
| D402 | 8-719-036-65 | s | DIODE RD2.0SB-T1 |
| D403 | 8-719-989-01 | s | DIODE DA221-TL |
| D404 | 8-719-989-01 | s | DIODE DA221-TL |
| D405 | 8-719-989-01 | s | DIODE DA221-TL |
| D406 | 8-719-989-01 | s | DIODE DA221-TL |
| D541 | 8-719-036-74 | s | DIODE RD3.3SB-T1 |
| D542 | 8-719-036-74 | s | DIODE RD3.3SB-T1 |
| D721 | 8-719-820-42 | s | DIODE 1SS302-TE85L |
| D722 | 8-719-820-42 | s | DIODE 1SS302-TE85L |
| D761 | 8-719-104-22 | s | DIODE 1SS123-T1 |
| E1 | 1-535-877-22 | s | CHIP, CHECKER |
| E2 | 1-535-877-22 | s | CHIP, CHECKER |
| E4 | 1-535-877-22 | s | CHIP, CHECKER |
| E11 | 1-535-877-22 | s | CHIP, CHECKER |
| E12 | 1-535-877-22 | s | CHIP, CHECKER |
| E13 | 1-535-877-22 | s | CHIP, CHECKER |
| E200 | 1-535-877-22 | s | CHIP, CHECKER |
| FL201 | 1-234-905-11 | s | FILTER, LOW PASS (4.85MHZ) |
| FL202 | 1-239-941-21 | s | FILTER, BAND PASS |
| FL601 | 1-234-968-11 | s | FILTER,LOW PASS |
| FL602 | 1-234-971-11 | s | FILTER,LOW PASS |
| IC1 | 8-759-327-01 | s | IC NJM062V(TE2) |
| IC11 | 6-700-655-01 | s | IC LT1963ES8#TR |
| IC21 | 8-759-371-78 | s | IC LT1431CS8-E1 |
| IC31 | 6-700-655-01 | s | IC LT1963ES8#TR |
| IC41 | 8-759-327-01 | s | IC NJM062V(TE2) |
| IC42 | 8-759-371-78 | s | IC LT1431CS8-E1 |
| IC61 | 8-759-256-43 | s | IC NJM2903M-TE2 |
| IC63 | 8-759-256-43 | s | IC NJM2903M-TE2 |
| IC92 | 6-706-487-01 | s | IC TC7SH08FU(T5RSOYJF) |
| IC93 | 8-759-363-26 | s | IC RN5VD28AA-TL-FA |
| IC94 | 8-759-346-27 | s | IC LM45BIM3X |
| IC101 | 6-706-492-01 | s | IC TC7SHU04FU(T5RSOJF) |
| IC102 | 8-759-530-31 | s | IC TC74VHC4040FT(EL) |
| IC103 | 6-707-871-01 | s | IC TC74VHC164FT(EKJ) |
| IC104 | 8-759-592-44 | s | IC TC7SZ04FU(TE85R) |
| IC105 | 8-759-561-46 | s | IC AD8014ARTZ-REEL7 |
| IC106 | 6-706-487-01 | s | IC TC7SH08FU(T5RSOYJF) |
| IC201 | 8-759-561-46 | s | IC AD8014ARTZ-REEL7 |
| IC202 | 8-759-811-40 | s | IC LA1140-E |
| IC203 | 8-759-277-98 | s | IC TA75S393F-TE85R |
| IC204 | 8-759-811-40 | s | IC LA1140-E |
| IC205 | 8-759-327-01 | s | IC NJM062V(TE2) |
| IC206 | 8-759-811-40 | s | IC LA1140-E |

(TR-136 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| IC207 | 8-759-327-01 | s | IC NJM062V(TE2) |
| IC208 | 8-759-811-40 | s | IC LA1140-E |
| IC209 | 8-759-327-01 | s | IC NJM062V(TE2) |
| IC210 | 8-759-811-40 | s | IC LA1140-E |
| IC211 | 8-759-327-01 | s | IC NJM062V(TE2) |
| IC401 | 8-759-647-71 | s | IC AK4550VT-E2 |
| IC402 | 8-759-327-01 | s | IC NJM062V(TE2) |
| IC404 | 8-759-327-01 | s | IC NJM062V(TE2) |
| IC405 | 8-759-083-42 | s | IC TC4W53FU(TE12R) |
| IC406 | 8-759-647-71 | s | IC AK4550VT-E2 |
| IC407 | 8-759-327-01 | s | IC NJM062V(TE2) |
| IC408 | 8-759-647-71 | s | IC AK4550VT-E2 |
| IC410 | 8-759-083-42 | s | IC TC4W53FU(TE12R) |
| IC531 | 8-759-472-43 | s | IC 74VHC245MTCX |
| IC532 | 8-759-472-43 | s | IC 74VHC245MTCX |
| IC533 | 8-759-679-05 | s | IC TC7WH34FU(TE12R) |
| IC541 *1 | 8-759-824-76 | s | IC TLC2934IPWR |
| *2 | 6-709-647-01 | s | IC TLC2932AIPWR |
| IC542 *1 | 8-759-824-76 | s | IC TLC2934IPWR |
| *2 | 6-709-647-01 | s | IC TLC2932AIPWR |
| IC543 | 8-759-669-66 | s | IC TLC272CPWR-12 |
| IC545 | 8-759-564-49 | s | IC TC7W53FU(TE12R) |
| IC546 | 8-759-592-48 | s | IC TC7SZ32FU(TE85R) |
| IC601 | 8-759-531-92 | s | IC TC7WH04FU(TE12R) |
| IC602 | 6-700-804-01 | s | IC SN74LVC574APWR |
| IC603 | 6-700-804-01 | s | IC SN74LVC574APWR |
| IC604 | 6-700-804-01 | s | IC SN74LVC574APWR |
| IC605 | 6-700-801-01 | s | IC DAC902E/2K5 |
| IC606 | 6-700-801-01 | s | IC DAC902E/2K5 |
| IC607 | 6-706-863-01 | s | IC LMH6732MFX/NOPB |
| IC608 | 6-706-863-01 | s | IC LMH6732MFX/NOPB |
| IC701 | 8-759-679-05 | s | IC TC7WH34FU(TE12R) |
| IC702 | 8-759-472-43 | s | IC 74VHC245MTCX |
| IC703 *1 | 8-759-295-09 | s | IC TLC2932IPW |
| *2 | 6-709-647-01 | s | IC TLC2932AIPWR |
| IC721 | 8-759-485-24 | s | IC MC74HC4046ADTR2 |
| IC722 | 8-759-669-66 | s | IC TLC272CPWR-12 |
| IC725 | 8-759-592-44 | s | IC TC7SZ04FU(TE85R) |
| IC727 | 8-759-592-44 | s | IC TC7SZ04FU(TE85R) |
| IC728 | 8-759-669-41 | s | IC SN74LVC125APWR-12 |
| IC729 | 8-759-531-92 | s | IC TC7WH04FU(TE12R) |
| IC761 | 8-759-669-66 | s | IC TLC272CPWR-12 |
| IC763 | 8-759-523-04 | s | IC TC74HC4538AFT(EL) |
| IC801 | 8-759-447-20 | s | IC AD8041ARZ-REEL |
| IC802 | 8-759-669-66 | s | IC TLC272CPWR-12 |
| IC803 | 8-759-447-20 | s | IC AD8041ARZ-REEL |
| IC805 | 8-759-287-55 | s | IC TC7S66FU(TE85R) |
| IC806 | 6-703-741-01 | s | IC ADS828E/1K |
| IC807 | 8-759-347-09 | s | IC NJU7034V-TE2 |
| IC851 | 6-700-804-01 | s | IC SN74LVC574APWR |
| IC852 | 6-700-804-01 | s | IC SN74LVC574APWR |
| IC853 | 6-700-804-01 | s | IC SN74LVC574APWR |
| IC854 | 8-759-592-48 | s | IC TC7SZ32FU(TE85R) |
| JC1 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| JC2 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| JC101 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| JC102 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| JC103 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| JC104 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |

(TR-136 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| L1 | 1-416-510-21 | s | COIL, CHOKE 100UH |
| L2 | 1-416-510-21 | s | COIL, CHOKE 100UH |
| L11 | 1-416-345-21 | s | COIL, CHOKE 22UH |
| L21 | 1-414-752-91 | s | INDUCTOR 2.2UH |
| L31 | 1-416-345-21 | s | COIL, CHOKE 22UH |
| L41 | 1-416-510-21 | s | COIL, CHOKE 100UH |
| L101 | 1-414-754-91 | s | INDUCTOR 10.0UH |
| L102 *1 | 1-414-404-41 | s | INDUCTOR 100UH |
| L103 *1 | 1-414-404-41 | s | INDUCTOR 100UH |
| L104 | 1-414-404-41 | s | INDUCTOR (SMD) 100.0UH |
| L105 | 1-414-404-41 | s | INDUCTOR (SMD) 100.0UH |
| L106 | 1-414-754-91 | s | INDUCTOR 10.0UH |
| L201 | 1-414-754-91 | s | INDUCTOR 10.0UH |
| L202 | 1-414-754-91 | s | INDUCTOR 10.0UH |
| L203 | 1-414-754-91 | s | INDUCTOR 10.0UH |
| L204 | 1-414-754-91 | s | INDUCTOR 10.0UH |
| L205 | 1-400-536-11 | s | INDUCTOR 100UH |
| L206 | 1-414-754-91 | s | INDUCTOR 10.0UH |
| L207 | 1-414-754-91 | s | INDUCTOR 10.0UH |
| L208 | 1-400-536-11 | s | INDUCTOR 100UH |
| L209 | 1-414-754-91 | s | INDUCTOR 10.0UH |
| L210 | 1-414-754-91 | s | INDUCTOR 10.0UH |
| L211 | 1-400-534-11 | s | INDUCTOR 68UH |
| L212 | 1-414-754-91 | s | INDUCTOR 10.0UH |
| L213 | 1-414-754-91 | s | INDUCTOR 10.0UH |
| L214 | 1-400-534-11 | s | INDUCTOR 68UH |
| L215 | 1-400-536-11 | s | INDUCTOR 100UH |
| L401 | 1-414-754-91 | s | INDUCTOR 10.0UH |
| L402 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L403 | 1-414-754-91 | s | INDUCTOR 10.0UH |
| L404 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L405 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L406 | 1-414-754-91 | s | INDUCTOR 10.0UH |
| L501 | 1-412-935-21 | s | INDUCTOR 0.47UH (2520) |
| L502 | 1-412-935-21 | s | INDUCTOR 0.47UH (2520) |
| L503 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L511 | 1-412-935-21 | s | INDUCTOR 0.47UH (2520) |
| L512 | 1-412-935-21 | s | INDUCTOR 0.47UH (2520) |
| L541 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L542 | 1-414-404-41 | s | INDUCTOR (SMD) 100.0UH |
| L543 | 1-414-404-41 | s | INDUCTOR (SMD) 100.0UH |
| L546 | 1-412-935-21 | s | INDUCTOR 0.47UH (2520) |
| L547 | 1-412-971-41 | s | INDUCTOR, SMALL TYPE 0.22UH |
| L548 | 1-412-971-41 | s | INDUCTOR, SMALL TYPE 0.22UH |
| L601 | 1-412-935-21 | s | INDUCTOR 0.47UH (2520) |
| L602 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L603 | 1-412-935-21 | s | INDUCTOR 0.47UH (2520) |
| L604 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L605 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L606 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L607 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L608 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L609 | 1-414-404-41 | s | INDUCTOR (SMD) 100.0UH |
| L610 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L611 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L701 | 1-414-404-41 | s | INDUCTOR (SMD) 100.0UH |
| L721 | 1-414-398-41 | s | INDUCTOR (SMD) 10.0UH |
| L722 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |

(TR-136 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| L723 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L724 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L725 | 1-414-392-41 | s | INDUCTOR (SMD) 1.0UH |
| L761 | 1-414-400-41 | s | INDUCTOR (SMD) 22.0UH |
| L801 | 1-414-752-91 | s | INDUCTOR 2.2UH |
| L802 | 1-414-752-91 | s | INDUCTOR 2.2UH |
| LV101 | 1-409-826-21 | s | COIL, VARIABLE |
| LV102 | 1-409-825-21 | s | COIL, VARIABLE |
| LV103 | 1-409-825-21 | s | COIL, VARIABLE |
| LV104 | 1-409-825-21 | s | COIL, VARIABLE |
| LV105 | 1-409-825-21 | s | COIL, VARIABLE |
| LV202 | 1-409-829-21 | s | COIL, TUNING |
| LV203 | 1-409-829-21 | s | COIL, TUNING |
| LV204 | 1-409-828-21 | s | COIL, TUNING |
| LV205 | 1-409-831-21 | s | COIL, TUNING |
| LV206 | 1-409-830-21 | s | COIL, TUNING |
| LV207 | 1-409-833-21 | s | COIL, TUNING |
| LV208 | 1-409-832-21 | s | COIL, TUNING |
| LV209 | 1-456-874-11 | s | COIL, TUNING (4.75MHZ) |
| LV210 | 1-456-873-11 | s | COIL, TUNING (4.75MHZ) |
| Q1 | 8-729-209-73 | s | TRANSISTOR 2SA1213Y-TE12L |
| Q2 | 8-729-209-77 | s | TRANSISTOR 2SC2873Y-TE12L |
| Q41 | 8-729-209-73 | s | TRANSISTOR 2SA1213Y-TE12L |
| Q42 | 8-729-209-73 | s | TRANSISTOR 2SA1213Y-TE12L |
| Q101 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q102 | 8-729-928-25 | s | TRANSISTOR 2SA1774TL-QR |
| Q103 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q104 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q105 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q106 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q107 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q108 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q109 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q110 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q111 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q112 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q113 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q114 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q115 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q116 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q117 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q201 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q202 | 8-729-928-82 | s | TRANSISTOR DTC144EE-TL |
| Q401 | 8-729-140-67 | s | TRANSISTOR 2SC4177-T1L5L6 |
| Q541 | 8-729-928-05 | s | TRANSISTOR 2SC4617TL-QR |
| Q542 | 8-729-928-25 | s | TRANSISTOR 2SA1774TL-QR |
| Q543 | 8-729-928-25 | s | TRANSISTOR 2SA1774TL-QR |
| Q721 | 8-729-928-25 | s | TRANSISTOR 2SA1774TL-QR |
| Q722 | 8-729-928-25 | s | TRANSISTOR 2SA1774TL-QR |
| Q761 | 8-729-142-11 | s | TRANSISTOR 2SA1226-T1E3E4 |
| Q801 | 8-729-403-30 | s | TRANSISTOR XN6435-TX |
| Q802 | 8-729-403-33 | s | TRANSISTOR XN6534-TX |
| R1 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R2 | 1-208-875-81 | s | RES, CHIP 330 (1005) |
| R3 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R4 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R5 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |

(TR-136 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R6 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R7 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R8 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R9 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R11 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R12 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R13 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R14 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R15 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R21 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R31 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R32 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R33 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R34 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R43 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R45 | 1-208-871-81 | s | RES, CHIP 220 (1005) |
| R46 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R47 | 1-208-875-81 | s | RES, CHIP 330 (1005) |
| R48 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R49 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R50 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R51 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R53 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R54 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R55 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R56 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R61 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R62 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R63 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R64 | 1-208-907-81 | s | RES, CHIP 6.8K (1005) |
| R65 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R66 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R67 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R68 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R69 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R70 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R71 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R72 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R73 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R74 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R78 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R91 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R92 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R93 | *2 1-208-911-81 | s | METAL CHIP 10K 0.5% 1/16W |
| R94 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R95 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R96 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R97 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R98 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R99 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R100 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R101 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R102 | 1-208-907-81 | s | RES, CHIP 6.8K (1005) |
| R103 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R104 | 1-243-975-81 | s | RES, CHIP 4.7M (1005) |
| R105 | 1-243-975-81 | s | RES, CHIP 4.7M (1005) |
| R106 | 1-208-947-81 | s | RES, CHIP 330K (1005) |
| R108 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R109 | 1-208-935-81 | s | RES, CHIP 100K (1005) |

(TR-136 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R111 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R112 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R113 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R114 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R115 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R116 | 1-208-959-81 | s | RES, CHIP 1M (1005) |
| R117 | 1-208-943-81 | s | RES, CHIP 220K (1005) |
| R118 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R119 | 1-208-899-81 | s | RES, CHIP 3.3K (1005) |
| R120 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R121 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R122 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R123 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R124 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R125 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R126 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R127 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R128 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R129 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R130 | 1-208-931-81 | s | RES, CHIP 68K (1005) |
| R131 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R132 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R133 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R134 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R135 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R136 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R137 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R138 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R139 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R141 | 1-208-907-81 | s | RES, CHIP 6.8K (1005) |
| R142 | 1-208-899-81 | s | RES, CHIP 3.3K (1005) |
| R143 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R144 | 1-208-913-81 | s | RES, CHIP 12K (1005) |
| R145 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R146 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R147 | 1-208-899-81 | s | RES, CHIP 3.3K (1005) |
| R148 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R149 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R150 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R151 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R152 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R153 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R154 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R155 | 1-208-907-81 | s | RES, CHIP 6.8K (1005) |
| R156 | 1-208-917-81 | s | RES, CHIP 18K (1005) |
| R157 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R158 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R159 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R166 | 1-208-907-81 | s | RES, CHIP 6.8K (1005) |
| R167 | 1-208-899-81 | s | RES, CHIP 3.3K (1005) |
| R168 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R169 | 1-208-913-81 | s | RES, CHIP 12K (1005) |
| R170 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R171 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R172 | 1-208-899-81 | s | RES, CHIP 3.3K (1005) |
| R173 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R174 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R175 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R176 | 1-208-911-81 | s | RES, CHIP 10K (1005) |

(TR-136 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R177 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R178 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R179 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R180 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R181 | 1-208-931-81 | s | RES, CHIP 68K (1005) |
| R182 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R183 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R184 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R191 | 1-208-899-81 | s | RES, CHIP 3.3K (1005) |
| R192 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R193 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R194 | 1-208-913-81 | s | RES, CHIP 12K (1005) |
| R195 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R196 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R197 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R198 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R199 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R200 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R201 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R202 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R203 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R204 | 1-208-907-81 | s | RES, CHIP 6.8K (1005) |
| R205 | 1-208-917-81 | s | RES, CHIP 18K (1005) |
| R206 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R207 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R208 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R216 | 1-208-899-81 | s | RES, CHIP 3.3K (1005) |
| R217 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R218 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R219 | 1-208-913-81 | s | RES, CHIP 12K (1005) |
| R220 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R221 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R222 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R223 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R224 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R225 | 1-208-907-81 | s | RES, CHIP 6.8K (1005) |
| R227 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R228 | 1-208-899-81 | s | RES, CHIP 3.3K (1005) |
| R229 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R230 | 1-208-907-81 | s | RES, CHIP 6.8K (1005) |
| R231 | 1-208-917-81 | s | RES, CHIP 18K (1005) |
| R232 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R233 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R234 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R241 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R242 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R243 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R244 | 1-208-891-81 | s | RES, CHIP 1.5K (1005) |
| R245 | 1-220-256-91 | s | RES, SQUARE TYPE CHIP 75(3225) |
| R246 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R247 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R248 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R249 | 1-208-931-81 | s | RES, CHIP 68K (1005) |
| R250 | 1-208-931-81 | s | RES, CHIP 68K (1005) |
| R251 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R252 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R253 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R261 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R262 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |

(TR-136 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R265 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R266 | 1-208-939-81 | s | RES, CHIP 150K (1005) |
| R267 | 1-208-891-81 | s | RES, CHIP 1.5K (1005) |
| R268 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R269 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R270 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R271 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R274 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R275 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R276 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R277 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R278 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R279 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R280 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R281 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R282 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R283 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R284 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R285 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R291 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R292 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R293 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R295 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R296 | 1-208-891-81 | s | RES, CHIP 1.5K (1005) |
| R297 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R299 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R300 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R301 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R302 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R303 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R304 | 1-208-939-81 | s | RES, CHIP 150K (1005) |
| R305 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R306 | 1-208-931-81 | s | RES, CHIP 68K (1005) |
| R307 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R308 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R309 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R310 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R311 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R312 | 1-208-907-81 | s | RES, CHIP 6.8K (1005) |
| R313 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R316 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R317 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R318 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R319 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R320 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R322 | 1-208-891-81 | s | RES, CHIP 1.5K (1005) |
| R323 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R324 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R325 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R326 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R327 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R328 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R329 | 1-208-939-81 | s | RES, CHIP 150K (1005) |
| R330 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R331 | 1-208-931-81 | s | RES, CHIP 68K (1005) |
| R332 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R333 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R334 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R335 | 1-208-907-81 | s | RES, CHIP 6.8K (1005) |

(TR-136 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R336 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R341 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R342 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R343 | 1-208-899-81 | s | RES, CHIP 3.3K (1005) |
| R345 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R347 | 1-208-891-81 | s | RES, CHIP 1.5K (1005) |
| R348 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R349 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R350 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R351 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R352 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R353 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R354 | 1-208-939-81 | s | RES, CHIP 150K (1005) |
| R355 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R356 | 1-208-931-81 | s | RES, CHIP 68K (1005) |
| R357 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R358 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R359 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R360 | 1-208-907-81 | s | RES, CHIP 6.8K (1005) |
| R361 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R366 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R367 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R368 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R369 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R370 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R372 | 1-208-891-81 | s | RES, CHIP 1.5K (1005) |
| R373 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R374 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R375 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R376 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R377 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R378 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R379 | 1-208-939-81 | s | RES, CHIP 150K (1005) |
| R380 | 1-208-923-81 | s | RES, CHIP 33K (1005) |
| R381 | 1-208-931-81 | s | RES, CHIP 68K (1005) |
| R382 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R383 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R384 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R385 | 1-208-907-81 | s | RES, CHIP 6.8K (1005) |
| R386 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R387 *2 | 1-218-941-11 | s | METAL CHIP 100 0.5% 1/16W |
| R388 *2 | 1-218-941-11 | s | METAL CHIP 100 0.5% 1/16W |
| R401 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R402 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R403 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R404 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R405 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R406 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R408 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R409 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R410 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R411 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R412 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R413 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R414 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R415 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R416 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R417 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R418 | 1-208-863-81 | s | RES, CHIP 100 (1005) |

(TR-136 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R419 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R420 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R421 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R422 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R423 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R424 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R425 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R426 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R429 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R430 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R432 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R434 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R435 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R436 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R437 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R441 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R442 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R443 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R444 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R445 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R446 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R447 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R448 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R449 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R450 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R451 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R452 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R453 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R454 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R461 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R462 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R463 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R464 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R465 | 1-208-855-81 | s | RES, CHIP 47 (1005) |
| R467 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R468 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R469 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R470 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R501 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R502 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R503 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R504 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R505 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R508 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R509 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R510 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R511 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R512 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R513 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R514 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R515 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R516 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R517 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R518 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R519 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R520 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R521 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R522 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R523 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |

(TR-136 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R524 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R531 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R532 | 1-220-878-81 | s | RES, CHIP 22 (1005) |
| R533 | 1-220-878-81 | s | RES, CHIP 22 (1005) |
| R534 | 1-220-878-81 | s | RES, CHIP 22 (1005) |
| R535 | 1-220-878-81 | s | RES, CHIP 22 (1005) |
| R536 | 1-220-878-81 | s | RES, CHIP 22 (1005) |
| R537 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R538 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R541 | 1-220-878-81 | s | RES, CHIP 22 (1005) |
| R542 | 1-220-878-81 | s | RES, CHIP 22 (1005) |
| R543 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R544 | 1-220-878-81 | s | RES, CHIP 22 (1005) |
| R545 | 1-220-878-81 | s | RES, CHIP 22 (1005) |
| R546 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R547 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R548 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R549 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R550 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R551 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R552 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R553 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R554 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R555 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R556 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R558 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R559 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R560 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R561 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R562 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R564 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R565 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R566 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R567 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R568 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R569 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R570 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R571 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R572 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R573 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R574 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R575 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R576 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R577 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R578 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R579 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R580 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R581 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R582 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R583 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R584 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R585 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R586 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R587 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R588 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R589 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R590 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R591 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R592 | 1-208-911-81 | s | RES, CHIP 10K (1005) |

(TR-136 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R593*1,2 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R601 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R602 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R603 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R604 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R605 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R606 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R607 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R609 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R610 | 1-220-878-81 | s | RES, CHIP 22 (1005) |
| R611 | 1-220-878-81 | s | RES, CHIP 22 (1005) |
| R612 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R613 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R614 | 1-208-867-81 | s | RES, CHIP 150 (1005) |
| R615 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R616 | 1-208-875-81 | s | RES, CHIP 330 (1005) |
| R617 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R618 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R619 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R620 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R621 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R624 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R626 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R628 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R629 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R630 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R631 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R632 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R633 | 1-208-867-81 | s | RES, CHIP 150 (1005) |
| R634 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R635 | 1-208-875-81 | s | RES, CHIP 330 (1005) |
| R636 | 1-208-867-81 | s | RES, CHIP 150 (1005) |
| R637 | 1-208-867-81 | s | RES, CHIP 150 (1005) |
| R638 | 1-208-875-81 | s | RES, CHIP 330 (1005) |
| R639 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R640 | 1-208-867-81 | s | RES, CHIP 150 (1005) |
| R641 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R642 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R643 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R644 | 1-208-883-81 | s | RES, CHIP 680 (1005) |
| R645 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R646 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R647 | 1-208-931-81 | s | RES, CHIP 68K (1005) |
| R648 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R649 | 1-208-931-81 | s | RES, CHIP 68K (1005) |
| R650 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R651 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R652 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R653 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R654 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R655 | 1-208-867-81 | s | RES, CHIP 150 (1005) |
| R656 | 1-208-867-81 | s | RES, CHIP 150 (1005) |
| R657 | 1-208-867-81 | s | RES, CHIP 150 (1005) |
| R658 | 1-208-867-81 | s | RES, CHIP 150 (1005) |
| R659 | 1-208-867-81 | s | RES, CHIP 150 (1005) |
| R660 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R661 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R662 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R663 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |

(TR-136 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R664 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R701 | 1-220-878-81 | s | RES, CHIP 22 (1005) |
| R702 | 1-220-878-81 | s | RES, CHIP 22 (1005) |
| R703 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R704 | 1-220-878-81 | s | RES, CHIP 22 (1005) |
| R705 | 1-220-878-81 | s | RES, CHIP 22 (1005) |
| R706 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R707 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R709 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R711 | 1-220-878-81 | s | RES, CHIP 22 (1005) |
| R712 | 1-208-955-81 | s | RES, CHIP 680K (1005) |
| R713 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R714 | 1-208-899-81 | s | RES, CHIP 3.3K (1005) |
| R715 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R716 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R721 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R722 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R723 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R724 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R725 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R726 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R727 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R728 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R729 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R730 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R731 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R732 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R733 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R734 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R735 | 1-244-161-81 | s | RES, CHIP 2.2 (1005) |
| R736 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R737 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R738 | 1-208-935-81 | s | RES, CHIP 100K (1005) |
| R739 | 1-244-161-81 | s | RES, CHIP 2.2 (1005) |
| R740 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R741 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R742 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R743 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R744 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R745 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R746 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R747 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R748 | 1-208-927-81 | s | RES, CHIP 47K (1005) |
| R749 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R750 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R751 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R752 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R753 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R754 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R755 | 1-220-870-81 | s | RES, CHIP 10 (1005) |
| R761 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R762 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R763 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R764 | 1-208-899-81 | s | RES, CHIP 3.3K (1005) |
| R765 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R766 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R767 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R768 | 1-208-919-81 | s | RES, CHIP 22K (1005) |
| R769 | 1-208-935-81 | s | RES, CHIP 100K (1005) |

(TR-136 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R770 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R771 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R772 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R773 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R774 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R775 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R776 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R777 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R778 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R779 | 1-208-879-81 | s | RES, CHIP 470 (1005) |
| R780 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R781 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R782 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R802 | 1-218-990-81 | s | CONDUCTOR, CHIP (1005) |
| R804 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R805 | 1-208-899-81 | s | RES, CHIP 3.3K (1005) |
| R806 | 1-208-891-81 | s | RES, CHIP 1.5K (1005) |
| R809 | 1-208-899-81 | s | RES, CHIP 3.3K (1005) |
| R810 | 1-208-891-81 | s | RES, CHIP 1.5K (1005) |
| R811 | 1-208-875-81 | s | RES, CHIP 330 (1005) |
| R814 | 1-208-891-81 | s | RES, CHIP 1.5K (1005) |
| R816 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R817 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R819 | 1-208-891-81 | s | RES, CHIP 1.5K (1005) |
| R820 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R821 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R822 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R824 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R825 | 1-220-878-81 | s | RES, CHIP 22 (1005) |
| R826 | 1-220-878-81 | s | RES, CHIP 22 (1005) |
| R827 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R828 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R829 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R830 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R831 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| R832 | 1-220-878-81 | s | RES, CHIP 22 (1005) |
| R833 | 1-208-903-81 | s | RES, CHIP 4.7K (1005) |
| R834 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R835 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R836 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R837 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R838 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R839 | 1-208-911-81 | s | RES, CHIP 10K (1005) |
| R840 | 1-208-915-81 | s | RES, CHIP 15K (1005) |
| R841 | 1-208-887-81 | s | RES, CHIP 1.0K (1005) |
| R842 | 1-208-863-81 | s | RES, CHIP 100 (1005) |
| R851 | 1-220-878-81 | s | RES, CHIP 22 (1005) |
| R852 | 1-220-878-81 | s | RES, CHIP 22 (1005) |
| R853 | 1-208-895-81 | s | RES, CHIP 2.2K (1005) |
| RB531 | 1-234-370-21 | s | RES, NETWORK 22 (1005X4) |
| RB532 | 1-234-370-21 | s | RES, NETWORK 22 (1005X4) |
| RB533 | 1-234-370-21 | s | RES, NETWORK 22 (1005X4) |
| RB534 | 1-234-370-21 | s | RES, NETWORK 22 (1005X4) |
| RB535 | 1-234-378-21 | s | RES, NETWORK 10K (1005X4) |
| RB536 | 1-234-378-21 | s | RES, NETWORK 10K (1005X4) |
| RB537 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB538 | 1-234-372-21 | s | RES, NETWORK 100 (1005X4) |
| RB601 | 1-234-378-21 | s | RES, NETWORK 10K (1005X4) |
| RB602 | 1-234-378-21 | s | RES, NETWORK 10K (1005X4) |

(TR-136 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| RB603 | 1-234-378-21 | s | RES, NETWORK 10K (1005X4) |
| RB604 | 1-234-378-21 | s | RES, NETWORK 10K (1005X4) |
| RB605 | 1-234-378-21 | s | RES, NETWORK 10K (1005X4) |
| RB606 | 1-234-378-21 | s | RES, NETWORK 10K (1005X4) |
| RB607 | 1-234-370-21 | s | RES, NETWORK 22 (1005X4) |
| RB608 | 1-234-370-21 | s | RES, NETWORK 22 (1005X4) |
| RB609 | 1-234-370-21 | s | RES, NETWORK 22 (1005X4) |
| RB610 | 1-234-370-21 | s | RES, NETWORK 22 (1005X4) |
| RB611 | 1-234-370-21 | s | RES, NETWORK 22 (1005X4) |
| RB612 | 1-234-370-21 | s | RES, NETWORK 22 (1005X4) |
| RB613 | 1-234-370-21 | s | RES, NETWORK 22 (1005X4) |
| RB614 | 1-234-370-21 | s | RES, NETWORK 22 (1005X4) |
| RB615 | 1-234-370-21 | s | RES, NETWORK 22 (1005X4) |
| RB616 | 1-234-370-21 | s | RES, NETWORK 22 (1005X4) |
| RB617 | 1-234-370-21 | s | RES, NETWORK 22 (1005X4) |
| RB618 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB619 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB620 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB621 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB622 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB623 | 1-234-373-21 | s | RES, NETWORK 220 (1005X4) |
| RB624 | 1-234-376-21 | s | RES, NETWORK 2.2K (1005X4) |
| RB625 | 1-234-376-21 | s | RES, NETWORK 2.2K (1005X4) |
| RB626 | 1-234-376-21 | s | RES, NETWORK 2.2K (1005X4) |
| RB701 | 1-234-374-21 | s | RES, NETWORK 470 (1005X4) |
| RB702 | 1-234-374-21 | s | RES, NETWORK 470 (1005X4) |
| RB703 | 1-234-374-21 | s | RES, NETWORK 470 (1005X4) |
| RB704 | 1-234-374-21 | s | RES, NETWORK 470 (1005X4) |
| RB851 | 1-234-370-21 | s | RES, NETWORK 22 (1005X4) |
| RB852 | 1-234-370-21 | s | RES, NETWORK 22 (1005X4) |
| RB853 | 1-234-370-21 | s | RES, NETWORK 22 (1005X4) |
| RB854 | 1-234-370-21 | s | RES, NETWORK 22 (1005X4) |
| RB855 | 1-234-370-21 | s | RES, NETWORK 22 (1005X4) |
| RB856 | 1-234-370-21 | s | RES, NETWORK 22 (1005X4) |
| RB857 | 1-234-370-21 | s | RES, NETWORK 22 (1005X4) |
| RB858 | 1-234-370-21 | s | RES, NETWORK 22 (1005X4) |
| RB859 | 1-234-370-21 | s | RES, NETWORK 22 (1005X4) |
| RB860 | 1-234-370-21 | s | RES, NETWORK 22 (1005X4) |
| RB861 | 1-234-370-21 | s | RES, NETWORK 22 (1005X4) |
| RB862 | 1-234-370-21 | s | RES, NETWORK 22 (1005X4) |
| RB863 | 1-234-378-21 | s | RES, NETWORK 10K (1005X4) |
| RB864 | 1-234-378-21 | s | RES, NETWORK 10K (1005X4) |
| RB865 | 1-234-378-21 | s | RES, NETWORK 10K (1005X4) |
| RB866 | 1-234-378-21 | s | RES, NETWORK 10K (1005X4) |
| RB867 | 1-234-378-21 | s | RES, NETWORK 10K (1005X4) |
| RB868 | 1-234-378-21 | s | RES, NETWORK 10K (1005X4) |
| RV102 | 1-225-791-21 | s | RES, ADJ, CERMET 5K |
| RV103 | 1-225-791-21 | s | RES, ADJ, CERMET 5K |
| RV104 | 1-225-791-21 | s | RES, ADJ, CERMET 5K |
| RV105 | 1-225-791-21 | s | RES, ADJ, CERMET 5K |
| RV201 | 1-225-793-21 | s | RES, ADJ, CERMET 20K |
| RV202 | 1-225-793-21 | s | RES, ADJ, CERMET 20K |
| RV203 | 1-225-793-21 | s | RES, ADJ, CERMET 20K |
| RV204 | 1-225-793-21 | s | RES, ADJ, CERMET 20K |
| RV601 | 1-225-791-21 | s | RES, ADJ, CERMET 5K |
| RV602 | 1-225-791-21 | s | RES, ADJ, CERMET 5K |
| RV721 | 1-225-793-21 | s | RES, ADJ, CERMET 20K |
| RV761 | 1-225-789-21 | s | RES, ADJ, CERMET 2K |

(TR-136 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| RV801 | 1-225-789-21 | s | RES, ADJ, CERMET 2K |
| S1 | 1-692-271-41 | s | SWITCH, SLIDE |
| THP1 ⚠ | 1-804-616-21 | s | THERMISTOR, POSITIVE |
| THP2 ⚠ | 1-804-616-21 | s | THERMISTOR, POSITIVE |
| THP11 ⚠ | 1-804-616-21 | s | THERMISTOR, POSITIVE |
| THP31 ⚠ | 1-804-616-21 | s | THERMISTOR, POSITIVE |
| THP41 ⚠ | 1-771-845-21 | s | THERMISTOR, POSITIVE |
| TP101 | 1-535-877-22 | s | CHIP, CHECKER |
| TP102 | 1-535-877-22 | s | CHIP, CHECKER |
| TP103 | 1-535-877-22 | s | CHIP, CHECKER |
| TP104 | 1-535-877-22 | s | CHIP, CHECKER |
| TP105 | 1-535-877-22 | s | CHIP, CHECKER |
| TP106 | 1-535-877-22 | s | CHIP, CHECKER |
| TP201 | 1-535-877-22 | s | CHIP, CHECKER |
| TP202 | 1-535-877-22 | s | CHIP, CHECKER |
| TP203 | 1-535-877-22 | s | CHIP, CHECKER |
| TP204 | 1-535-877-22 | s | CHIP, CHECKER |
| TP205 | 1-535-877-22 | s | CHIP, CHECKER |
| TP206 | 1-535-877-22 | s | CHIP, CHECKER |
| TP207 | 1-535-877-22 | s | CHIP, CHECKER |
| TP208 | 1-535-877-22 | s | CHIP, CHECKER |
| TP209 | 1-535-877-22 | s | CHIP, CHECKER |
| TP210 | 1-535-877-22 | s | CHIP, CHECKER |
| TP401 | 1-535-877-22 | s | CHIP, CHECKER |
| TP601 | 1-535-877-22 | s | CHIP, CHECKER |
| TP602 | 1-535-877-22 | s | CHIP, CHECKER |
| TP603 | 1-535-877-22 | s | CHIP, CHECKER |
| TP604 | 1-535-877-22 | s | CHIP, CHECKER |
| TP605 | 1-535-877-22 | s | CHIP, CHECKER |
| TP721 | 1-535-877-22 | s | CHIP, CHECKER |
| TP801 | 1-535-877-22 | s | CHIP, CHECKER |
| X101 | 1-781-696-21 | s | VIBRATOR, CRYSTAL (32.768 KHz) |
| X541 | 1-813-677-11 | s | OSCILLATOR, CRYSTAL (VCXO) |
| X542 | 1-813-676-11 | s | OSCILLATOR, CRYSTAL (VCXO) |
| X543 | 1-813-675-11 | s | OSCILLATOR, CRYSTAL (VCXO) |
| X544 | 1-813-674-11 | s | OSCILLATOR, CRYSTAL (VCXO) |
| X721 | 1-795-671-12 | s | OSCILLATOR, CRYSTAL |
| X722 | 1-795-670-12 | s | OSCILLATOR, CRYSTAL |

---
VDA-63 BOARD
---

*1: [Board No. suffix 12]
*2: [Board No. suffix 13-]

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| 1pc | A-1101-923-A | s | MOUNTED CIRCUIT BOARD, VDA-63 |
| 3pcs | 3-729-061-01 | s | SCREW (M2X4.5) (TYPE 1)(STEEL) |
| 2pcs | 4-654-273-02 | s | ACE (M2), LOCK |
| C1 | 1-127-692-91 | s | CAP, CHIP CERAMIC 10MF B 3216 |
| C2 | 1-127-692-91 | s | CAP, CHIP CERAMIC 10MF B 3216 |
| C3 | 1-100-352-91 | s | CAP, CHIP CERAMIC 1MF B (1608) |
| C4 | 1-100-352-91 | s | CAP, CHIP CERAMIC 1MF B (1608) |
| C5 | 1-100-352-91 | s | CAP, CHIP CERAMIC 1MF B (1608) |
| C6 | 1-126-396-11 | s | CAPACITOR,ELECT 47MF/16V(CHIP) |
| C7 | 1-126-395-11 | s | CAPACITOR,ELECT 22MF/16V(CHIP) |
| C8 | 1-126-395-11 | s | CAPACITOR,ELECT 22MF/16V(CHIP) |
| C9 | 1-127-692-91 | s | CAP, CHIP CERAMIC 10MF B 3216 |
| C12 | 1-119-923-11 | s | CAPACITOR,CHIP CERAMIC 0.047MF |
| C14 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C15 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C16 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C17 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C19 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C20 | 1-100-352-91 | s | CAP, CHIP CERAMIC 1MF B (1608) |
| C22 | 1-100-352-91 | s | CAP, CHIP CERAMIC 1MF B (1608) |
| C23 | 1-119-923-11 | s | CAPACITOR,CHIP CERAMIC 0.047MF |
| C24 | 1-100-352-91 | s | CAP, CHIP CERAMIC 1MF B (1608) |
| C25 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C26 | 1-107-819-11 | s | CAP,CERAMIC 22000PF/16V(1005) |
| C27 | 1-164-936-11 | s | CAPACITOR,CHIP CERAMIC 680PF |
| C28 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C29 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C30 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C31 | 1-131-661-11 | s | CAPACITOR,ELECT 100MF/10V CHIP |
| C32 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C33 | 1-100-055-21 | s | CAP, CHIP CERAMIC 22MF B 3225 |
| C34 | 1-126-395-11 | s | CAPACITOR,ELECT 22MF/16V(CHIP) |
| C35 | 1-126-395-11 | s | CAPACITOR,ELECT 22MF/16V(CHIP) |
| C36 | 1-127-692-91 | s | CAP, CHIP CERAMIC 10MF B 3216 |
| C37 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C38 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C39 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C40 | 1-164-850-11 | s | CAPACITOR,CHIP CERAMIC 10PF/50 |
| C41 | 1-164-850-11 | s | CAPACITOR,CHIP CERAMIC 10PF/50 |
| C100 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C103 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C104 | 1-164-840-11 | s | CAPACITOR,CHIP CERAMIC 1.5PF |
| C105 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C106 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C107 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C108 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C109 | 1-164-845-11 | s | CAPACITOR,CERAMIC 5PF/16V(1005 |
| C110 | 1-164-840-11 | s | CAPACITOR,CHIP CERAMIC 1.5PF |
| C111 | 1-164-845-11 | s | CAPACITOR,CERAMIC 5PF/16V(1005 |
| C113 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C114 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C115 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C116 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C117 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C118 | 1-164-840-11 | s | CAPACITOR,CHIP CERAMIC 1.5PF |
| C119 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |

(VDA-63 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C120 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C121 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C122 | 1-165-884-91 | s | CAPACITOR, CERAMIC 2.2MF(1608) |
| C123 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C124 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C125 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C126 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C127 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C128 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C129 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C130 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C131 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C132 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C133 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C134 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C135 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C136 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C137 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C138 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C139 | 1-100-567-81 | s | CAP,CHIP CERAMIC 0.01MF B 1005 |
| C140 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C141 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C142 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C143 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C144 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C145 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C146 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C147 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C148 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C149 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C150 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C151 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C152 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C153 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C154 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C155 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C156 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C157 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C158 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C159 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C160 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C161 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C162 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C163 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C164 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C165 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C166 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C167 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C168 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C169 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C170 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C171 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C172 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C173 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C174 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C175 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C176 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C177 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C178 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |

(VDA-63 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C179 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C180 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C181 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C182 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C183 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C184 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C185 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C186 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C187 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C188 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C189 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C300 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C301 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C302 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C303 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C304 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C305 | 1-126-390-11 | s | CAPACITOR ELECT 22MF/6.3V(105) |
| C306 | 1-126-390-11 | s | CAPACITOR ELECT 22MF/6.3V(105) |
| C307 | 1-164-862-11 | s | CAPACITOR,CHIP CERAMIC 33PF/50 |
| C308 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C309 | 1-164-860-11 | s | CAPACITOR,CHIP CERAMIC 27PF/50 |
| C310 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C311 | 1-164-862-11 | s | CAPACITOR,CHIP CERAMIC 33PF/50 |
| C312 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C313 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C314 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C316 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C317 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C318 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C319 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C320 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C321 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C322 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C323 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C324 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C325 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C326 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C327 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C328 | 1-164-937-11 | s | CAPACITOR,CHIP CERAMIC 1000PF |
| C329 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C330 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C331 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C332 | 1-164-860-11 | s | CAPACITOR,CHIP CERAMIC 27PF/50 |
| C333 | 1-164-874-11 | s | CAPACITOR,CHIP CERAMIC 100PF |
| C334 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C335 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C336 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C337 | 1-100-159-91 | s | CAP, CERAMIC 22MF B (SMD) 3216 |
| C338 | 1-164-850-11 | s | CAPACITOR,CHIP CERAMIC 10PF/50 |
| C339 | 1-164-858-11 | s | CAPACITOR,CERAMIC 22PF/50V |
| C340 | 1-164-866-11 | s | CAPACITOR,CHIP CERAMIC 47PF/50 |
| C341 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C342 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C343 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C344 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C345 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C346 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C347 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C348 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |

(VDA-63 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C349 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C350 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C351 | 1-164-840-11 | s | CAPACITOR,CHIP CERAMIC 1.5PF |
| C352 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C353 | 1-164-840-11 | s | CAPACITOR,CHIP CERAMIC 1.5PF |
| C354 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C355 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C356 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C357 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C358 | 1-164-845-11 | s | CAPACITOR,CERAMIC 5PF/16V(1005 |
| C359 | 1-164-840-11 | s | CAPACITOR,CHIP CERAMIC 1.5PF |
| C360 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C361 | 1-164-845-11 | s | CAPACITOR,CERAMIC 5PF/16V(1005 |
| C362 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C363 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C364 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C365 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C367 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C368 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C369 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C370 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C371 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C372 | 1-164-840-11 | s | CAPACITOR,CHIP CERAMIC 1.5PF |
| C373 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C374 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C375 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C376 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C377 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C378 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C379 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C380 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C381 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C382 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C383 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C384 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C385 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C386 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C387 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C388 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C391 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C392 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C393 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C394 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C395 | 1-164-840-11 | s | CAPACITOR,CHIP CERAMIC 1.5PF |
| C396 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C397 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C398 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C399 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C400 | 1-164-840-11 | s | CAPACITOR,CHIP CERAMIC 1.5PF |
| C401 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C402 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C403 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C404 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C405 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C406 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C407 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C408 | 1-164-840-11 | s | CAPACITOR,CHIP CERAMIC 1.5PF |
| C409 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C410 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |

(VDA-63 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| C411 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C412 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C413 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C414 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C415 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C416 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C417 | 1-164-840-11 | s | CAPACITOR,CHIP CERAMIC 1.5PF |
| C418 | 1-164-840-11 | s | CAPACITOR,CHIP CERAMIC 1.5PF |
| C419 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C420 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C421 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C422 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C423 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C424 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C425 | 1-165-989-11 | s | CAPACITOR, CERAMIC 10MF (2012) |
| C426 | 1-125-777-11 | s | CAPACITOR CERAMIC 0.1MF/10V |
| C427 | 1-164-840-11 | s | CAPACITOR,CHIP CERAMIC 1.5PF |
| C428 | 1-164-840-11 | s | CAPACITOR,CHIP CERAMIC 1.5PF |
| CN100 | 1-764-093-21 | o | PIN, CONNECTOR (PC BOARD) 8P |
| D1 | 8-719-017-03 | s | DIODE 02DZ4.7-TPH3 |
| D2 | 8-719-017-03 | s | DIODE 02DZ4.7-TPH3 |
| D3 | 8-719-017-03 | s | DIODE 02DZ4.7-TPH3 |
| E1 | 1-535-877-22 | s | CHIP,CHECKER (TEST POINT) |
| FB1 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB2 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB100 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB101 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FB102 | 1-469-094-21 | s | FERRITE, EMI (SMD) |
| FL100 | 1-813-544-11 | s | FILTER, LOW PASS |
| FL101 | 1-813-543-11 | s | FILTER, LOW PASS |
| FL102 | 1-813-543-11 | s | FILTER, LOW PASS |
| FL300 | 1-233-891-21 | s | FILTER, LOW PASS |
| IC1 | 6-701-572-01 | s | IC TPS54610PWPR |
| IC2 | 6-704-976-01 | s | IC ADR381ART-REEL7 |
| IC3 | 8-759-327-01 | s | IC NJM062V-TE2 |
| IC4 | 8-759-327-01 | s | IC NJM062V-TE2 |
| IC100 | 8-759-490-42 | s | IC TC74VHCT574AFT(EL) |
| IC102 | 8-759-561-46 | s | IC AD8014ART-REEL7 |
| IC103 | 8-759-685-33 | s | IC BU2500FV-E2 |
| IC104 | 8-759-561-46 | s | IC AD8014ART-REEL7 |
| IC105 | 8-759-363-26 | s | IC RN5VD28AA-TL |
| IC106 | 8-759-662-39 | s | IC 74VHCT245AMTCX |
| IC107 | 8-759-662-39 | s | IC 74VHCT245AMTCX |
| IC108 | 6-706-487-01 | s | IC TC7SH08FU(T5RSOYJF) |
| IC109 | 6-700-387-01 | s | IC EPC2LC20-TP |
| IC111 | 8-752-391-99 | s | IC CXD2315Q-T4 |
| IC112 | 8-752-391-99 | s | IC CXD2315Q-T4 |
| IC113 | 8-752-391-99 | s | IC CXD2315Q-T4 |
| IC114 | 6-706-863-01 | s | IC LMH6732MFX/NOPB |
| IC115 | 6-706-863-01 | s | IC LMH6732MFX/NOPB |
| IC116 | 6-706-863-01 | s | IC LMH6732MFX/NOPB |
| IC300 | 8-759-675-47 | s | IC SN74LVC04APWR |
| IC301 | 8-759-561-46 | s | IC AD8014ART-REEL7 |
| IC302 | 8-759-184-64 | s | IC TC4W66FU |
| IC303 | 8-759-344-12 | s | IC GS4981CTAE3 |
| IC304 | 8-759-980-44 | s | IC TL712CPS |
| IC305 | 8-759-980-44 | s | IC TL712CPS |

(VDA-63 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| IC306 | 8-759-561-46 | s | IC AD8014ART-REEL7 |
| IC307 | 6-706-484-01 | s | IC TC7SH04FU(T5RSOYJF) |
| IC308 | 8-759-549-01 | s | IC SN74LV125APWR |
| IC309 | 8-759-490-42 | s | IC TC74VHCT574AFT(EL) |
| IC310 | 6-706-863-01 | s | IC LMH6732MFX/NOPB |
| IC311 | 8-759-561-46 | s | IC AD8014ART-REEL7 |
| IC312 | 6-706-471-01 | s | IC THS5661AIPWR |
| IC313 | 6-706-484-01 | s | IC TC7SH04FU(T5RSOYJF) |
| IC314 | 8-759-561-46 | s | IC AD8014ART-REEL7 |
| IC315 | 8-759-561-46 | s | IC AD8014ART-REEL7 |
| IC316 | 8-759-561-46 | s | IC AD8014ART-REEL7 |
| IC317 | 8-759-564-49 | s | IC TC7W53FU-TE12R |
| IC318 | 6-706-863-01 | s | IC LMH6732MFX/NOPB |
| IC319 | 6-706-863-01 | s | IC LMH6732MFX/NOPB |
| IC320 | 6-706-863-01 | s | IC LMH6732MFX/NOPB |
| IC321 | 6-706-863-01 | s | IC LMH6732MFX/NOPB |
| IC322 | 6-706-863-01 | s | IC LMH6732MFX/NOPB |
| IC323 | 6-706-863-01 | s | IC LMH6732MFX/NOPB |
| IC324 | 8-759-663-35 | s | IC 74VHC4053MTCX |
| IC325 | 8-759-669-66 | s | IC TLC272CPWR |
| IC326 | 8-759-669-66 | s | IC TLC272CPWR |
| IC327 | 6-706-863-01 | s | IC LMH6732MFX/NOPB |
| L1 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L2 | 1-416-344-11 | s | COIL, CHOKE 10UH |
| L3 | 1-416-344-11 | s | COIL, CHOKE 10UH |
| L4 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L5 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L6 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L101 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L102 | 1-412-947-11 | s | INDUCTOR 4.7UH (2520) |
| L103 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |
| L104 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |
| L105 | 1-414-392-31 | s | INDUCTOR (SMD) 1.0UH |
| L106 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L107 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L108 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L109 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L110 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L111 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L112 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L113 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L114 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L115 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L116 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L117 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L300 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L301 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L302 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L303 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L304 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L305 | 1-412-947-11 | s | INDUCTOR 4.7UH (2520) |
| L306 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L307 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L308 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L309 | 1-412-955-11 | s | INDUCTOR 22UH (2520) |
| L310 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L311 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L312 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |

(VDA-63 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| L313 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L314 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L315 | 1-412-947-11 | s | INDUCTOR 4.7UH (2520) |
| L316 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L317 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L318 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L319 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L320 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L321 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L322 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L323 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L324 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L325 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L326 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L327 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L328 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L329 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L330 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L331 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L332 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L333 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L334 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L335 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L336 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L337 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L338 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| L339 | 1-414-398-11 | s | INDUCTOR (SMD) 10UH |
| Q1 | 8-729-230-27 | s | TRANSISTOR 2SA1213Y-TE12L |
| Q2 | 8-729-230-27 | s | TRANSISTOR 2SA1213Y-TE12L |
| Q3 | 8-729-807-51 | s | TRANSISTOR 2SD1623-S |
| Q300 | 8-729-928-19 | s | TRANSISTOR 2SA1774R |
| Q301 | 8-729-927-99 | s | TRANSISTOR 2SC4617R |
| Q302 | 8-729-927-99 | s | TRANSISTOR 2SC4617R |
| Q303 | 8-729-927-99 | s | TRANSISTOR 2SC4617R |
| Q304 | 8-729-143-13 | s | TRANSISTOR 2SC4176-B34 |
| Q305 | 8-729-143-13 | s | TRANSISTOR 2SC4176-B34 |
| Q306 | 8-729-143-13 | s | TRANSISTOR 2SC4176-B34 |
| Q307 | 8-729-143-13 | s | TRANSISTOR 2SC4176-B34 |
| Q308 | 8-729-928-36 | s | TRANSISTOR DTA114EE |
| Q309 | 8-729-928-36 | s | TRANSISTOR DTA114EE |
| Q310 | 8-729-143-07 | s | TRANSISTOR 2SA1610-Y33 |
| Q311 | 8-729-143-07 | s | TRANSISTOR 2SA1610-Y33 |
| Q312 | 8-729-143-13 | s | TRANSISTOR 2SC4176-B34 |
| Q313 | 8-729-143-13 | s | TRANSISTOR 2SC4176-B34 |
| Q314 | 8-729-143-13 | s | TRANSISTOR 2SC4176-B34 |
| Q315 | 8-729-143-13 | s | TRANSISTOR 2SC4176-B34 |
| Q316 | 8-729-143-13 | s | TRANSISTOR 2SC4176-B34 |
| Q317 | 8-729-143-13 | s | TRANSISTOR 2SC4176-B34 |
| Q318 | 8-729-928-36 | s | TRANSISTOR DTA114EE |
| Q319 | 8-729-928-36 | s | TRANSISTOR DTA114EE |
| Q320 | 8-729-143-07 | s | TRANSISTOR 2SA1610-Y33 |
| Q321 | 8-729-928-36 | s | TRANSISTOR DTA114EE |
| Q322 | 8-729-143-07 | s | TRANSISTOR 2SA1610-Y33 |
| Q323 | 8-729-143-07 | s | TRANSISTOR 2SA1610-Y33 |
| R1 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R2 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R3 | 1-208-933-11 | s | RESISTOR CHIP 82K |
| R5 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |

(VDA-63 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R7 | 1-208-923-11 | s | RESISTOR, CHIP 33K (1005) |
| R8 | 1-208-923-11 | s | RESISTOR, CHIP 33K (1005) |
| R9 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R10 | 1-208-699-11 | s | RESISTOR,CHIP 4.7K 1/16W(1005) |
| R11 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R12 | 1-208-687-11 | s | RESISTOR CHIP 1.5K 1/16W (1005 |
| R13 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R14 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R15 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R16 | 1-208-687-11 | s | RESISTOR CHIP 1.5K 1/16W (1005 |
| R17 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R18 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R19 | 1-208-931-11 | s | RESISTOR, CHIP 68K (1005) |
| R20 | 1-208-931-11 | s | RESISTOR, CHIP 68K (1005) |
| R21 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R22 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R23 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R24 | 1-208-697-11 | s | RESISTOR CHIP 3.9K 1/16W(1005) |
| R25 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R26 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R100 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R101 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R102 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R103 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R106 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R107 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R108 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R109 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R110 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R111 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R112 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R113 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R114 | 1-208-691-11 | s | RESISTOR CHIP 2.2K 1/16W(1005) |
| R115 | 1-208-671-11 | s | RESISTOR CHIP 330 1/16W (1005) |
| R116 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R117 | 1-208-679-11 | s | RESISTOR CHIP 680 1/16W (1005) |
| R118 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R119 | 1-208-671-11 | s | RESISTOR CHIP 330 1/16W (1005) |
| R120 | 1-208-675-11 | s | RESISTOR CHIP 470 1/16W (1005) |
| R121 | 1-208-679-11 | s | RESISTOR CHIP 680 1/16W (1005) |
| R122 | 1-208-675-11 | s | RESISTOR CHIP 470 1/16W (1005) |
| R123 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R124 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R125 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R126 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R127 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R128 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R129 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R130 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R131 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R132 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R133 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R134 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R135 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R136 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R137 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R138 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R139 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R140 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |

(VDA-63 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R141 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R142 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R143 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R144 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R145 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R146 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R147 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R148 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R149 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R150 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R151 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R152 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R153 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R154 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R155 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R156 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R157 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R158 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R159 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R160 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R161 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R162 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R163 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R164 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R165 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R166 | 1-208-691-11 | s | RESISTOR CHIP 2.2K 1/16W(1005) |
| R167 | 1-208-695-11 | s | RESISTOR CHIP 3.3K 1/16W(1005) |
| R169 | 1-208-695-11 | s | RESISTOR CHIP 3.3K 1/16W(1005) |
| R171 | 1-208-671-11 | s | RESISTOR CHIP 330 1/16W (1005) |
| R172 | 1-208-671-11 | s | RESISTOR CHIP 330 1/16W (1005) |
| R173 | 1-208-671-11 | s | RESISTOR CHIP 330 1/16W (1005) |
| R174 | 1-208-671-11 | s | RESISTOR CHIP 330 1/16W (1005) |
| R175 | 1-208-671-11 | s | RESISTOR CHIP 330 1/16W (1005) |
| R176 | 1-208-671-11 | s | RESISTOR CHIP 330 1/16W (1005) |
| R177 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R178 | 1-208-679-11 | s | RESISTOR CHIP 680 1/16W (1005) |
| R179 | 1-208-695-11 | s | RESISTOR CHIP 3.3K 1/16W(1005) |
| R180 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R181 | 1-208-679-11 | s | RESISTOR CHIP 680 1/16W (1005) |
| R182 | 1-208-695-11 | s | RESISTOR CHIP 3.3K 1/16W(1005) |
| R183 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R184 | 1-208-679-11 | s | RESISTOR CHIP 680 1/16W (1005) |
| R185 | 1-208-695-11 | s | RESISTOR CHIP 3.3K 1/16W(1005) |
| R186 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R187 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R188 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R189 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R190 | 1-208-699-11 | s | RESISTOR,CHIP 4.7K 1/16W(1005) |
| R191 | 1-208-663-11 | s | RESISTOR CHIP 150 1/16W (1005) |
| R192 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R193 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R194 | 1-208-675-11 | s | RESISTOR CHIP 470 1/16W (1005) |
| R195 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R196 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R197 | 1-208-671-11 | s | RESISTOR CHIP 330 1/16W (1005) |
| R198 | *1 1-208-695-11 | s | METAL CHIP 3.3K 0.5% 1/16W |
| R199 | *1 1-208-695-11 | s | METAL CHIP 3.3K 0.5% 1/16W |
| R200 | 1-208-695-11 | s | RESISTOR CHIP 3.3K 1/16W(1005) |
| R201 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |

(VDA-63 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R202 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R203 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R204 *1 | 1-208-695-11 | s | METAL CHIP 3.3K 0.5% 1/16W |
| R205 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R206 *1 | 1-208-695-11 | s | METAL CHIP 3.3K 0.5% 1/16W |
| R207 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R208 | 1-208-695-11 | s | RESISTOR CHIP 3.3K 1/16W(1005) |
| R209 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R210 | 1-208-691-11 | s | RESISTOR CHIP 2.2K 1/16W(1005) |
| R211 | 1-208-699-11 | s | RESISTOR,CHIP 4.7K 1/16W(1005) |
| R212 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R213 | 1-208-691-11 | s | RESISTOR CHIP 2.2K 1/16W(1005) |
| R214 | 1-208-699-11 | s | RESISTOR,CHIP 4.7K 1/16W(1005) |
| R215 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R216 | 1-208-691-11 | s | RESISTOR CHIP 2.2K 1/16W(1005) |
| R217 | 1-208-923-11 | s | RESISTOR, CHIP 33K (1005) |
| R218 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R219 | 1-208-939-11 | s | RESISTOR, CHIP 150K (1005) |
| R220 | 1-208-939-11 | s | RESISTOR, CHIP 150K (1005) |
| R221 | 1-208-939-11 | s | RESISTOR, CHIP 150K (1005) |
| R222 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R223 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R224 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R225 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R300 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R301 | 1-208-860-11 | s | RESISTOR CHIP 75 1/16W (1005) |
| R302 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R303 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R304 | 1-208-699-11 | s | RESISTOR,CHIP 4.7K 1/16W(1005) |
| R306 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R308 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R309 | 1-208-695-11 | s | RESISTOR CHIP 3.3K 1/16W(1005) |
| R310 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R311 | 1-208-699-11 | s | RESISTOR,CHIP 4.7K 1/16W(1005) |
| R312 | 1-208-675-11 | s | RESISTOR CHIP 470 1/16W (1005) |
| R313 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R314 | 1-208-695-11 | s | RESISTOR CHIP 3.3K 1/16W(1005) |
| R315 | 1-208-699-11 | s | RESISTOR,CHIP 4.7K 1/16W(1005) |
| R316 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R317 | 1-208-675-11 | s | RESISTOR CHIP 470 1/16W (1005) |
| R318 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R319 | 1-208-687-11 | s | RESISTOR CHIP 1.5K 1/16W (1005 |
| R321 | 1-208-703-11 | s | RESISTOR,CHIP 6.8K 1/16W(1005) |
| R322 | 1-208-927-11 | s | RESISTOR, CHIP 47K 1/16W(1005) |
| R323 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R324 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R325 | 1-208-691-11 | s | RESISTOR CHIP 2.2K 1/16W(1005) |
| R326 | 1-208-695-11 | s | RESISTOR CHIP 3.3K 1/16W(1005) |
| R327 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R328 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R329 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R330 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R331 | 1-208-955-11 | s | RESISTOR CHIP 680K |
| R332 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R333 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R334 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R335 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R336 | 1-208-955-11 | s | RESISTOR CHIP 680K |
| R337 | 1-208-947-11 | s | RESISTOR CHIP 330K 1/16W(1005) |

(VDA-63 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R338 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R339 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R340 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R341 | 1-208-671-11 | s | RESISTOR CHIP 330 1/16W (1005) |
| R342 | 1-208-873-11 | s | RESISTOR,CHIP 270 1/16W (1005) |
| R343 | 1-208-855-81 | s | RESISTOR,CHIP 47 1/16W (1005) |
| R344 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R345 | 1-208-647-11 | s | RESISTOR CHIP 33 1/16W (1005) |
| R346 | 1-208-699-11 | s | RESISTOR,CHIP 4.7K 1/16W(1005) |
| R347 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R348 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R349 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R350 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R351 | 1-208-679-11 | s | RESISTOR CHIP 680 1/16W (1005) |
| R352 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R353 | 1-218-945-11 | s | RESISTOR,CHIP 220 1/16W(1005) |
| R354 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R355 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R356 | 1-208-691-11 | s | RESISTOR CHIP 2.2K 1/16W(1005) |
| R357 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R358 | 1-208-679-11 | s | RESISTOR CHIP 680 1/16W (1005) |
| R359 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R360 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R361 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R362 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R363 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R364 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R365 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R366 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R367 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R368 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R369 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R370 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R372 | 1-218-948-11 | s | RESISTOR CHIP 390 1/16W (1005) |
| R373 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R374 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R375 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R376 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R377 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R378 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R379 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R380 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R381 | 1-208-939-11 | s | RESISTOR, CHIP 150K (1005) |
| R382 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R383 | 1-208-691-11 | s | RESISTOR CHIP 2.2K 1/16W(1005) |
| R384 | 1-208-671-11 | s | RESISTOR CHIP 330 1/16W (1005) |
| R385 | 1-208-679-11 | s | RESISTOR CHIP 680 1/16W (1005) |
| R386 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R387 | 1-208-955-11 | s | RESISTOR CHIP 680K |
| R388 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R389 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R390 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R391 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R392 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R393 | 1-208-663-11 | s | RESISTOR CHIP 150 1/16W (1005) |
| R394 | 1-208-695-11 | s | RESISTOR CHIP 3.3K 1/16W(1005) |
| R395 | 1-208-695-11 | s | RESISTOR CHIP 3.3K 1/16W(1005) |
| R396 | 1-208-695-11 | s | RESISTOR CHIP 3.3K 1/16W(1005) |
| R397 | 1-208-695-11 | s | RESISTOR CHIP 3.3K 1/16W(1005) |

(VDA-63 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R398 | 1-208-671-11 | s | RESISTOR CHIP 330 1/16W (1005) |
| R399 | 1-208-679-11 | s | RESISTOR CHIP 680 1/16W (1005) |
| R400 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R402 | 1-208-695-11 | s | RESISTOR CHIP 3.3K 1/16W(1005) |
| R403 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R404 | 1-208-671-11 | s | RESISTOR CHIP 330 1/16W (1005) |
| R405 | 1-208-675-11 | s | RESISTOR CHIP 470 1/16W (1005) |
| R406 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R407 | 1-208-691-11 | s | RESISTOR CHIP 2.2K 1/16W(1005) |
| R408 | 1-208-679-11 | s | RESISTOR CHIP 680 1/16W (1005) |
| R409 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R410 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R411 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R412 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R413 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R414 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R415 | 1-208-671-11 | s | RESISTOR CHIP 330 1/16W (1005) |
| R416 | 1-208-691-11 | s | RESISTOR CHIP 2.2K 1/16W(1005) |
| R417 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R418 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R419 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R420 | 1-208-675-11 | s | RESISTOR CHIP 470 1/16W (1005) |
| R421 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R422 | 1-208-675-11 | s | RESISTOR CHIP 470 1/16W (1005) |
| R423 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R424 | 1-208-935-11 | s | RESISTOR, CHIP 100K (1005) |
| R425 | 1-218-990-11 | s | RESISTOR,CHIP 0 1/16W (1005) |
| R426 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R427 | 1-208-679-11 | s | RESISTOR CHIP 680 1/16W (1005) |
| R428 | 1-208-679-11 | s | RESISTOR CHIP 680 1/16W (1005) |
| R429 | 1-208-911-11 | s | RESISTOR, CHIP 10K (1005) |
| R430 | 1-208-679-11 | s | RESISTOR CHIP 680 1/16W (1005) |
| R431 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R434 | 1-208-679-11 | s | RESISTOR CHIP 680 1/16W (1005) |
| R435 | 1-208-679-11 | s | RESISTOR CHIP 680 1/16W (1005) |
| R436 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R437 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R438 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R440 | 1-208-663-11 | s | RESISTOR CHIP 150 1/16W (1005) |
| R441 | 1-208-939-11 | s | RESISTOR, CHIP 150K (1005) |
| R442 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R443 | 1-208-860-11 | s | RESISTOR CHIP 75 1/16W (1005) |
| R444 | 1-208-860-11 | s | RESISTOR CHIP 75 1/16W (1005) |
| R445 | 1-208-671-11 | s | RESISTOR CHIP 330 1/16W (1005) |
| R446 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R447 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R448 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R449 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R450 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R451 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R452 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R454 | 1-208-663-11 | s | RESISTOR CHIP 150 1/16W (1005) |
| R455 | 1-208-695-11 | s | RESISTOR CHIP 3.3K 1/16W(1005) |
| R456 | 1-208-939-11 | s | RESISTOR, CHIP 150K (1005) |
| R457 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R458 | 1-208-695-11 | s | RESISTOR CHIP 3.3K 1/16W(1005) |
| R459 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R460 | 1-208-695-11 | s | RESISTOR CHIP 3.3K 1/16W(1005) |
| R461 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |

(VDA-63 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| R462 | 1-208-860-11 | s | RESISTOR CHIP 75 1/16W (1005) |
| R463 | 1-208-860-11 | s | RESISTOR CHIP 75 1/16W (1005) |
| R464 | 1-208-860-11 | s | RESISTOR CHIP 75 1/16W (1005) |
| R465 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R466 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R467 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R468 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R469 | 1-208-715-11 | s | RESISTOR,CHIP 22K 1/16W (1005) |
| R470 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R471 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R472 | 1-208-691-11 | s | RESISTOR CHIP 2.2K 1/16W(1005) |
| R473 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R474 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R475 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R476 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R478 | 1-208-663-11 | s | RESISTOR CHIP 150 1/16W (1005) |
| R479 | 1-208-939-11 | s | RESISTOR, CHIP 150K (1005) |
| R480 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R481 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R482 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R483 | 1-208-860-11 | s | RESISTOR CHIP 75 1/16W (1005) |
| R484 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R485 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R486 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R487 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R488 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R489 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R491 | 1-208-663-11 | s | RESISTOR CHIP 150 1/16W (1005) |
| R493 | 1-208-663-11 | s | RESISTOR CHIP 150 1/16W (1005) |
| R494 | 1-208-939-11 | s | RESISTOR, CHIP 150K (1005) |
| R495 | 1-208-939-11 | s | RESISTOR, CHIP 150K (1005) |
| R496 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R497 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R498 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R499 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R500 | 1-208-860-11 | s | RESISTOR CHIP 75 1/16W (1005) |
| R501 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R502 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R503 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R504 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| R505 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R506 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R508 | 1-208-663-11 | s | RESISTOR CHIP 150 1/16W (1005) |
| R510 | 1-208-663-11 | s | RESISTOR CHIP 150 1/16W (1005) |
| R511 | 1-208-939-11 | s | RESISTOR, CHIP 150K (1005) |
| R512 | 1-208-939-11 | s | RESISTOR, CHIP 150K (1005) |
| R513 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R514 | 1-208-683-11 | s | RESISTOR CHIP 1K 1/16W (1005) |
| R515 | 1-208-860-11 | s | RESISTOR CHIP 75 1/16W (1005) |
| R516 | 1-208-860-11 | s | RESISTOR CHIP 75 1/16W (1005) |
| R517 | 1-208-860-11 | s | RESISTOR CHIP 75 1/16W (1005) |
| R518 | 1-208-860-11 | s | RESISTOR CHIP 75 1/16W (1005) |
| R519 | 1-208-860-11 | s | RESISTOR CHIP 75 1/16W (1005) |
| R520 | 1-218-941-11 | s | RESISTOR,CHIP 100 1/16W (1005) |
| RB100 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB102 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB103 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB104 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB105 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |

(VDA-63 BOARD)

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| RB106 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB107 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB108 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB109 | 1-234-371-11 | s | RES, NETWORK 47X4 (1005) |
| RB110 | 1-234-371-11 | s | RES, NETWORK 47X4 (1005) |
| RB111 | 1-234-373-21 | s | RES, NETWORK 220X4 (1005) |
| RB112 | 1-234-373-21 | s | RES, NETWORK 220X4 (1005) |
| RB113 | 1-234-373-21 | s | RES, NETWORK 220X4 (1005) |
| RB114 | 1-234-373-21 | s | RES, NETWORK 220X4 (1005) |
| RB115 | 1-234-373-21 | s | RES, NETWORK 220X4 (1005) |
| RB116 | 1-234-373-21 | s | RES, NETWORK 220X4 (1005) |
| RB117 | 1-234-373-21 | s | RES, NETWORK 220X4 (1005) |
| RB118 | 1-234-373-21 | s | RES, NETWORK 220X4 (1005) |
| RB119 | 1-234-373-21 | s | RES, NETWORK 220X4 (1005) |
| RB300 | 1-234-372-11 | s | RES, NETWORK 100X4 (1005) |
| RB301 | 1-234-373-21 | s | RES, NETWORK 220X4 (1005) |
| RB302 | 1-234-373-21 | s | RES, NETWORK 220X4 (1005) |
| RB303 | 1-234-373-21 | s | RES, NETWORK 220X4 (1005) |
| THP1 | ⚠ 1-804-458-21 | s | THERMISTOR, POSITIVE |
| THP2 | ⚠ 1-804-458-21 | s | THERMISTOR, POSITIVE |
| THP3 | ⚠ 1-804-458-21 | s | THERMISTOR, POSITIVE |
| THP4 | ⚠ 1-804-458-21 | s | THERMISTOR, POSITIVE |
| TP100 | 1-535-877-22 | s | CHIP,CHECKER (TEST POINT) |
| TP300 | 1-535-877-22 | s | CHIP,CHECKER (TEST POINT) |
| TP301 | 1-535-877-22 | s | CHIP,CHECKER (TEST POINT) |

## 1-4. Optional Fixtures

| Part No. | SP | Description |
|---|---|---|
| A-8326-017-A | s | MOUNTED CIRCUIT BOARD, ROM-28 |
| A-8327-351-A | o | MOUNTED CIRCUIT BOARD, EX-738 |
| A-8344-327-A | s | EXTENSION ASSY,DPR-197 |
| J-6480-010-A | o | ALIGNMENT SLEEVE REMOVER |
| J-7120-140-A | o | PLD DOWNLOAD FIXTURE |

## 1-5. Supplied Accessories

### 1-5-1. HDC1000/1100

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| 2pcs | 2-280-511-02 | o | BRACKET,ADJUSTMENT ANGLE |
| 2pcs | 3-185-945-02 | s | PLATE, NUMBER (WHITE) |
| | 3-622-537-02 | o | PLATE,NUMBER(LLA) (BLACK) |
| 2pcs | 3-612-712-01 | s | BAND,CLAMP |
| 1pc | ⚠ 3-903-903-04 | s | OPERATION MANUAL |
| 1pc | 3-992-267-01 | s | PLATE, NUMBER |
| 1pc | 4-027-937-03 | s | PLATE,NUMBER |

### 1-5-2. HDC1400/1450/1500/1550/1580/1600

| Ref. No. or Q'ty | Part No. | SP | Description |
|---|---|---|---|
| 1pc | ⚠ 3-868-749-08 | s | OPERATION MANUAL (for HDC1400/1450/1500/1550/1600) |
| 1pc | 3-872-580-03 | s | LABEL(HANDLE) |
| 1pc | 3-872-608-03 | s | LABEL(BNC) |
| 1pc | ⚠ 3-992-285-04 | s | OPERATION MANUAL (for HDC1580) |

# Section 2
# Semiconductor Pin Assignments

The following describes the semiconductor types used in this unit.
For semiconductors marked with page numbers in the index, refer to the corresponding pages in this section. However, in some cases incompatible types are also listed, therefore, when a part is to be replaced, also refer to the Spare Parts section.
In addition, for semiconductors with ID Nos., refer to the separate CD-ROM titled “Semiconductor Pin Assignments” (Sony Part No. 9-968-546-06) that allows searching for parts by semiconductor type or ID No.
The semiconductors in the manual or on the CD-ROM are listed by equivalent types. Thus the external view or the index mark indication may differ from the actual type.
Pin assignments and block diagrams are based on the IC manufacturer’s data book.

本機に使用されている半導体型名の一覧を下記に示します。
索引中，ページが記載されている半導体は，本章の該当ページを参照してください。ただし，互換性のない型名を併記している場合がありますので，部品を交換するときは，Spare Partsの章を参照してください。
また，ID番号が記載されている半導体は，別途発行の “Semiconductor Pin Assignments” CD−ROM版 (ソニー部品番号：9−968−546−06)を参照してください。
半導体型名またはID番号から検索ができます。
マニュアルまたはCD−ROMに掲載されている半導体は，それぞれの機能を等価的に表わしたものです。
外観やインデックスマークの表示方法が実物と異なる場合があります。
ピン配置およびブロック図はICメーカーのデータブックに従いました。


**DIODE** — **Page or ID No.**

02DZ4.7-TPH3 ..... DC008-04

1SS184 ..... DC001-03
1SS271 ..... DC001-01
1SS300-TE85L ..... DC001-02
1SS301-TE85L ..... DC001-03
1SS302 ..... DC001-01
1SS302-TE85L ..... DC001-01

DAN222 ..... DC001-03
DAN222-TL ..... DC001-03

EC10QS-06-TE12L ..... DC007-01
EC10QS06 ..... DC007-01

HSM88WA ..... DC001-02
HSM88WK ..... DC001-03
HSM88WK-TL ..... DC001-03

MA3J142E0LSO ..... DC001-03
MA3J14300LSO ..... DC001-01
MA6S121-(TX) ..... DC005-07
MA728 ..... DC008-01
MA728-TX ..... DC008-01

RD13SB-T1 ..... DC008-04
RD2.0SB-T1 ..... DC008-04
RD20SB-T1 ..... DC008-04
RD3.0SB ..... DC008-04
RD5.1SB-T2 ..... DC008-04
RD8.2SB-T1 ..... DC008-04

SC802-04-TE12RA ..... DC008-02

**LED** — **Page or ID No.**

CL-191YG-CD-T ..... LC004-01
CL-200HR-C-TSL ..... LC008-04

F1J6 ..... LC001-01
F1J6TP ..... LC001-01

MD0708C-RG ..... LR083-04

**TRANSISTOR** — **Page or ID No.**

2SA1213Y-TE12L ..... TC002-01
2SA1610-T1Y34 ..... TC001-01
2SA1610-Y33 ..... TC001-01
2SA1615-Z-K ..... TC010-02
2SA1774R ..... TC001-01
2SB1115-T1YL ..... TC002-01
2SB1115A ..... TC002-01
2SB624-BV5 ..... TC001-01
2SB624-T1BV5 ..... TC001-01
2SC3324 ..... TC001-02
2SC4176-B34 ..... TC001-02
2SC4176T1B33B34B35 ..... TC001-02
2SC4177 ..... TC001-02
2SC4617R ..... TC001-02
2SD1623-S ..... TC002-02
2SD2098-T100R ..... TC002-02
2SK620 ..... TC001-07
2SK880GR-TE85L ..... TC001-05

DTA114EE ..... TC001-04
DTA123JE-TL ..... TC001-04
DTA144EE ..... TC001-04
DTA144EE-TL ..... TC001-04
DTC114EE ..... TC001-03

# Index


| TRANSISTOR | Page or ID No. |
|---|---|
| DTC123JE | TC001-03 |
| DTC123JE-TL | TC001-03 |
| DTC144EE | TC001-03 |
| DTC144EE-TL | TC001-03 |
| FDC6506P | TC005-19 |
| FDC6561AN | TC005-20 |
| NDS355AN | TC001-07 |
| NDS356AP | TC001-20 |

| IC | Page or ID No. |
|---|---|
| 74VHC08MTCX | TC74HC08P |
| 74VHC245MTCX | TC74HC245P |
| 74VHC4053MTCX | MC74HC4053F |
| 74VHCT245AMTCX | TC74HC245P |
| AD5424YCPZ-REEL7 | AD5424YCPZ-REEL7 |
| AD8014ART-REEL7 | AD8055ART-REEL7 |
| ADR381ART-REEL7 | MAX6066BEUR-T |
| AK4552VT-E2 | AK4552VT-E2 |
| AK5380VT-E2 | AK5380VT-E2 |
| AK9813BF-E2 | MB88E346PFV-G-BND-ER |
| BU2500FV-E2 | M62352P |
| CAT24WC08J-TE13 | X24C02S-30 |
| CAT24WC256XI-TE13 | CAT24WC256XI-TE13 |
| CXD1171M | CXD1171M |
| CXD2315Q-T4 | CXD2306Q |
| CXD9093R | CXD9093R |
| CXD9156GG-P | 9-999-999-99 |
| EPC2LC20-TP | EPC2LC20 |
| EPC2LC20N-TP | EPC2LC20 |
| HD64F2377VFQ33V | HD64F2377VFQ33V |
| HD64F7145F50 | HD64F7145F50 |
| IS42S32200B-6TL-TR | IS42S32200B-6TL-TR |
| LM45BIM3X | LM45BIM3X |
| M51132FP | M51132FP |
| MB86189PFV-G-BND-ER | MB86189PFV-G-BND-ER |
| MC100LVEL11DTR2 | MC10EL11DR2 |
| MC14053BDTR2 | MC74HC4053F |
| MC74HC4046ADTR2 | CD4046BE |
| MC74HC4052ADTR2 | MC74HC4052N |
| NC7SZ86P5X | TC7S86FU |
| NJM062V(TE2) | RC4558 |
| NJM062V(TE2) | RC4558 |
| NJM062V-TE2 | RC4558 |
| NJM2772V(TE2) | NJM2772V_TE2 |
| NJM2903V(TE2) | UA393DC |
| NJM2904V(TE2) | RC4558 |
| NJM3414AV(TE2) | RC4558 |
| NJM4558V-TE2 | RC4558 |
| NJM4580V(TE2) | RC4558 |
| NJM4580VTE2 | RC4558 |
| PCA9555DB-118 | PCA9555DB-118 |
| RN5VD28AA-TL | S-80928ANMP-DDR-T2 |
| RTC4574JE-TP | RTC4574JE-TP |
| S-812C30AUA-C2KT2G | S-81225AG-RH |
| SN74AHCT04PWR | TC74HC04P |
| SN74LV125APWR | MC74HC125N |
| SN74LV541APWR | MC74HC541N |
| SN74LVC00APWR | TC74HC00P |
| SN74LVC04APWR | TC74HC04P |
| SN74LVC138APWR-12 | TC74HC138P |
| SN74LVC157APWR | TC74HC157P |
| SN74LVC245APWR | TC74HC245P |
| SN74LVC541APWR | SN74LS541N |
| SN74LVC574APWR | TC74HC574P |
| SN74LVC74APWR-12 | TC74HC74P |
| SN75158PS | SN75158P |
| TC4W66FU(TE12R) | TC4W66F |
| TC4W66FU | TC4W66F |
| TC74ACT04F | TC74HC04P |
| TC74ACT04F-EL | TC74HC04P |
| TC74HC4051AFT(EL) | MC74HC4051N |
| TC74HC4052AFT(EL) | MC74HC4052N |
| TC74VHC14FT(EL) | TC74HC14P |
| TC74VHC32FT(EL) | TC74HC32P |
| TC74VHC373FT(EL) | TC74HC373P |
| TC74VHC595FT(EL) | TC74HC595P |
| TC74VHCT04AFT(EL) | TC74HC04P |
| TC74VHCT125AFT(EL) | MC74HC125N |
| TC74VHCT244AFT(EL) | TC74HC244P |
| TC74VHCT574AFT(EL) | TC74HC574P |
| TC7SZ00FU(TE85R) | TC7S00F |
| TC7SZ04FU(TE85R) | TC7S04F |
| TC7SZ08FU(TE85R) | TC7S08F |
| TC7SZ125FU(TE85R) | NC7SZ125P5 |
| TC7W53FU(TE12R) | TC4W53FU |
| TC7W53FU-TE12R | TC4W53FU |
| TC7WH00FU(TE12R) | TC7W00F |
| TC7WH00FU-TE12R | TC7W00F |
| TC7WH04FK(TE85R) | TC7W04F |
| TC7WH04FU(TE12R) | TC7W04F |
| TC7WH08FK(TE85R) | TC7W08F |
| TC7WH125FU(TE12R) | TC7W125FU |
| TC7WH14FK(TE85R) | TC7W14FU |
| TC7WH157FU(TE12R) | TC7WH157FU_TE12R |
| TC7WH32FK-TE85R | TC7W32FU |
| TC7WH32FU(TE12R) | TC7W32FU |
| TC7WH32FU-TE12R | TC7W32FU |
| TC7WH74FU(TE12R) | TC7W74FU |
| TL074CPWR-12 | XRA10324AF |
| TL712CPS | TL712CP |

| IC | Page or ID No. |
|---|---|
| TL7705CPS-B | TL7705CP |
| TLC272CPS | RC4558 |
| TLC272CPWR | RC4558 |
| TLC272CPWR-12 | RC4558 |
| TLC2932IPWR | TLC2932IPW |
| TLC7733IPWR-12 | TLC7733IPWR |
| TPS54610PWPR | TPS54610PWPR |
| UPC814G2-E2 | RC4558 |
| UPD6467GR-525-E2 | UPD6466GS-502-E2 |

| OTHERS | Page or ID No. |
|---|---|
| HCPL-0630-500 | MA009-01 |

# Section 3
# Block Diagrams

**Index** **Page**

A. AT-163 ..... 3-6
AU-298 ..... 3-5

D. DAP-33 ..... 3-5
DPR-265 (HDC1000/1100/1400/1450/1500/1550/1600) ..... 3-8
DPR-265C (HDC1580) ..... 3-9

M. MX-109 (HDC1450/1550) ..... 3-15

O. Overall (HDC1000/1100/1400/1450/1500/1550/1600) ..... 3-2
Overall (HDC1580) ..... 3-3

S. SDI-84 (HDC1000/1100/1500/1600) ..... 3-10
SDI-84C (HDC1400/1580) ..... 3-11

T. TG-243 (HDC1000/1400/1450/1500/1550/1580) ..... 3-13
TG-247 (HDC1100/1600) ..... 3-14
TR-136 (HDC1450/1550) ..... 3-16

V. VDA-63 ..... 3-12

- Board List は，Section 4 Schematic Diagramsの4-2ページにあります。
- There is a Board List in page 4-2 of Section 4 Schematic Diagrams.

**Overall** HDC1000/1100/1400/1450/1500/1550/1600




**Overall**

HDC1000/1100/1400/1450/1500/1550/1600



3-2

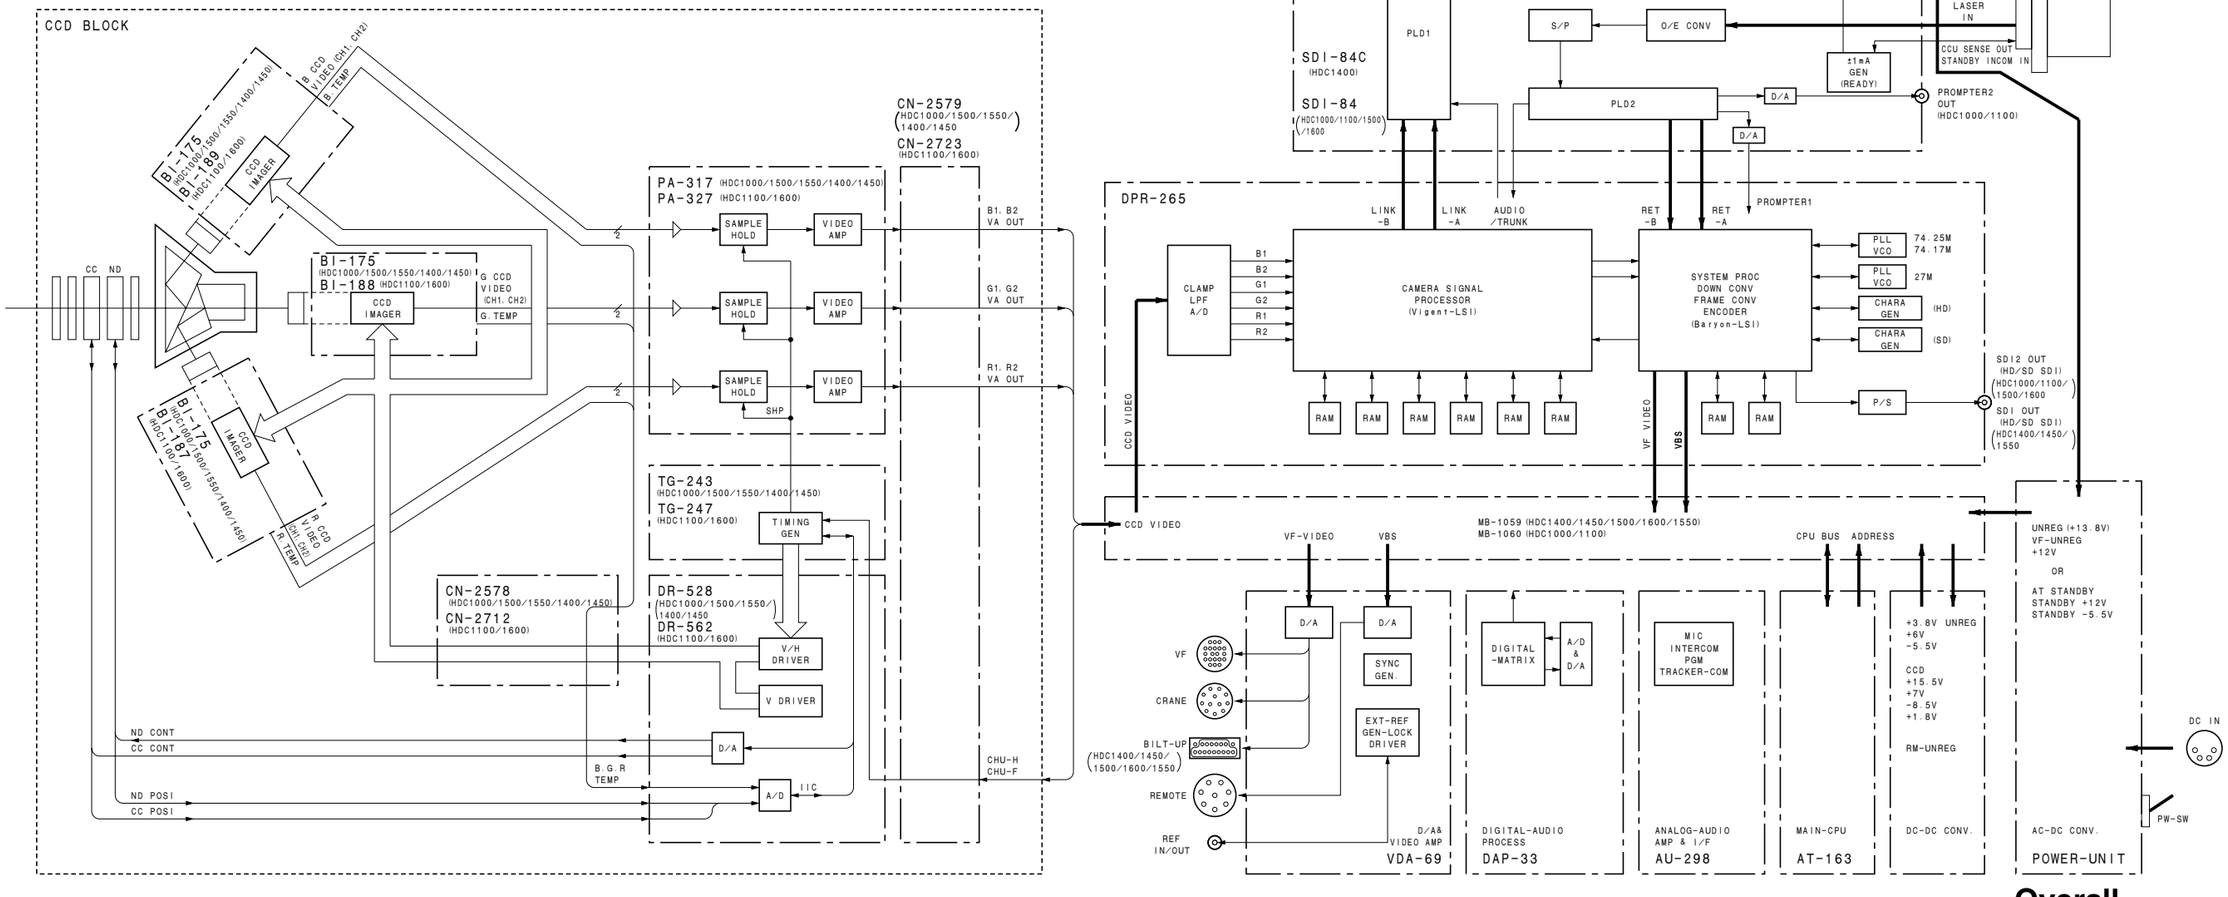


**Overall**
HDC1580


DPR-265
MB-1060 (HDC1000/1100)
MB-1059 (HDC1500/1600/1550/1580/1400/1450)
DAP-33
AU-298
AT-163
PLD DIGITAL MATRIX
MIC
INCOM1
INCOM2
IC61 SEL
IC81 REAL TIME CLOCK
BATTERY
SUPER CAP
IC201
IC213
IC75 RS422 RECEIVER
IC271 A/D
IC272 LPF MIC1
IC273 LPF MIC2
IC301 A/D D/A
IC302 LPF INCOM1 TALK IN
IC303 AMP INCOM1 RECEIVE OUT
IC304 AMP INCOM1 PGM OUT
IC351 A/D D/A
IC352 LPF INCOM2 TALK IN
IC353 AMP INCOM2 RECEIVE OUT
IC354 AMP INCOM2 PGM OUT
IC401 A/D D/A
IC402 LPF RTS1 IN
IC403-405 EARPHONE-L OUT EARPHONE-R OUT
IC451 A/D D/A
IC453 LPF
IC452 AMP TRACKER TALK (X) IN TRACKER TALK (Y) IN
IC454, 455 LPF
IC456 AMP TRACKER RECEIVE OUT
IC456 AMP TRACKER PGM OUT
IC203 3.3V POWER DET
IC202 ROM
IC212 PLL
IC213 X1 24.576M
IC214 PLL X2 24.576M
IC82 (1/2) SEL
IC82 (2/2) 422A 232C 422A
TRUNK ENC/DEC
IC402 ATT AMP
IC411 SEL
IC412 AMP ATT
IC13 3W-1, 2 (4+4) GAIN
IC12 (1/2) 3W (4) MODE
IC12 (2/2) 3W (4) MODE
IC11 3W
IC202 SEL
IC203 IC204
IC201 AMP
IC205 E-VR
IC206 IC207 SEL
IC208 IC209 AMP
IC19 MIC ON/OFF CONT
IC18 STANDBY DETECT
IC15 BUFF
IC16 BUFF
IC13 3W (6)
IC302 (2/2) SEL
IC302 (1/2) IC301 AMP
IC12 (2/2) MIC ON/OFF CONT
IC304 IC305 IC307 BUF
IC306 AMP
Q449 PHANTOM (+48V)
S1 (1/2) S2 (1/2)
RV1 RV2 CANCEL
AT-163
HDC1000/1100
HDC1500/1600/1550/1580/1400/1450
CN-2603 CN1 17 21 26 30 INCOM PANEL
SW-1241 CN1 7 9 12 8 10 INCOM PANEL
SW-1241B CN1 7 9 12 NC 10 INCOM PANEL
CN-2604 CRANE CN
CN-2619 CRANE CN
CN-2606 MIC PANEL
CN-2617 FRONT SW
CN-2615 FRONT MIC CN
CN-2621 EXT CN
CN-2621GA EXT CN
SW-1273 INCOM PANEL
SW-1239 FRONT SW
SW-1241 SW-1241B INCOM PANEL
CN-2619 EARPHONE TRACKER CN
CN-2604 TRACKER CN
MB-1060 LENS
MB-1059 BUILT UP
CN-2617 FRONT SW
CN-2621 EXT CN
CN-2603 INCOM PANEL
CN-2606. 11-18. 19 (HDC1000/1100)
CN-2621. 1-17. 19 (HDC1500/1600/1550/1580/1400/1450)
3W DIN
3W CLK
3W LD
3W DOUT
+48V
+26V
+30V IN (RTS)
FRONT-MIC PH-ON/OFF
PHANTOM (+48V)
F-MIC1 IN
F-MIC2 IN
AUDIO1 IN
AUDIO2 IN
GAIN-CONT [3:0]
3W-DOUT
3W. CLK. LD
MIC1 OUT
MIC2 OUT
INCOM IT OUT
STANDBY INCOM OUT
INCOM1 TALK IN
INCOM2 TALK IN
INCOM1 RECEIVE (X) OUT
INCOM1 RECEIVE (Y) OUT
INCOM1 PGM (X) OUT
INCOM1 PGM (Y) OUT
INCOM2 RECEIVE (X) OUT
INCOM2 RECEIVE (Y) OUT
INCOM2 PGM (Y) OUT
INCOM2 PGM (X) OUT
RTS1 IN/OUT
RTS2 IN/OUT
MIC-ON/OFF (REAR)
MIC-ON/OFF (RET-CN)
MIC-ON/OFF (LENS)
MIC-ON/OFF (DEMAND)
MIC SW ON
VOL1 FVOL (AU)
INCOM1 RCV IN
INCOM1 PGM IN
INCOM2 TALK OUT
INCOM2 RECEIVE IN
INCOM2 PGM IN
RTS1 OUT
RTS1-DET
RTS2-DET
RTS-POW
RTS
TRACKER IN GAIN
TRACKER
TRACKER-R/P
EARPHONE
RTS1
INCOM1-R/P
INCOM2
INCOM2-R/P
138. 139 RTS-DETECT
CPU BUS
XMUTE
XRE-CONFIG (AT)
XRESET (AT)
XCS (AT)
XRE-CONFIG
CONF_DONE
PLL1 64. 66
PLL2 125. 127
TRUNK1 OUT (CRANE)
TRUNK2 OUT (CRANE)
TRUNK1 IN (CRANE)
TRUNK2 IN (CRANE)
TRUNK1-TX
TRUNK2-TX
TRUNK1-RX
TRUNK2-RX
TRUNK1-422TX
TRUNK1 422RX-X
TRUNK2 422RX-Y
NOMAL 232C
CRANE DEBUG
422A-2CH CCU DEBUG
SEL+
VOL1
VOL2
VOL3
VOL4
VOL5
VOL6
VOL SEL
FVOL (DAP)
SEL1 89
SEL2 24
SEL3 90
RTC-CLK
RTC-DATA
RTC-CS
BATTERY LEVEL
BT1
C74
27MCLK
BCK (64FS)
LRCK (FS=48K)
PDM1/2
SPARE1/2
INCOM1/2
TRUNK1/2
MIC1/2
AES1/2
AES/EBU (X) (Y)
PDN
113 AES1/2
28 MIC1/2
97 INCOM1
32 INCOM1-R/P
94 INCOM2
29 INCOM2-R/P
88 RTS1
23 EARPHONE
87 TRACKER IN GAIN
36 TRACKER
21 TRACKER-R/P
VOL1 FVOL
STANDBY INCOM IN
INCOM1 RCV IN
INCOM1 PGM IN
INCOM2 RECEIVE IN
INCOM2 PGM IN
RTS1 OUT
RTS1-DET
RTS2-DET
RTS-POW
RTS
INCOM1 RECEIVE (X) OUT
INCOM1 RECEIVE (Y) OUT
INCOM1 PGM (X) OUT
INCOM1 PGM (Y) OUT
INCOM2 RECEIVE (X) OUT
RTS1 IN/OUT
INCOM2 RECEIVE (Y) OUT
INCOM2 PGM (Y) OUT
INCOM2 PGM (X) OUT
RTS2 IN/OUT


MEMORY STICK
CN-2617. 6-6 (HDC1500/1600/1550/1580/1400/1450)
CN-2608. 2-8 (HDC1000/1100)
CN-2617. 6-3. 9 (HDC1500/1600/1550/1580/1400/1450)
CN-2608. 2-9 (HDC1000/1100)
MS XINS-in
MS POWER-out
IC109 CPU
IC108 ADDRESS DECODER
IC110 ADDRESS DECODER
IC116
IC143 MEMORY STICK CONTROL
IC118 FLASH MEMORY
IC122 FLASH MEMORY
IC127 SRAM
IC128 SRAM
IC125 ADDRESS DECODER
IC124 SRAM DECODER
IC133 FRAM
IC139 FRAM
IC141 FRAM
IC142 FRAM
IC112
IC123 BUFF
IC114
IC115
IC129
IC131
IC132
IC134
IC135
IC136
IC137
IC138
IC144
IC146
IC130
IC113 1/2 DIVIDE
IC117 RESET
IC120
IC106
IC107
IC103
IC104
IC404 (1/2)
IC301
IC302
IC303
IC304
IC305
IC306
IC307
IC308
Q105
Q104
Q102. 103 PLUSE GEN
X101 16.934MHz
X301 VCO 27MHz
S201
PLD (1/2)
SERIAL I/F
PH301 RX RECEIVER
MS-LED-R
MS-LED-G
MS SDIO
MS CLK
MS BS
CN-2617. 9-7 (HDC1500/1600/1550/1580/1400/1450)
CN-2608. 2-2 (HDC1000/1100)
CN-2617. 9-9 (HDC1500/1600/1550/1580/1400/1450)
CN-2608. 2-4 (HDC1000/1100)
CN-2617. 9-10 (HDC1500/1600/1550/1580/1400/1450)
CN-2608. 2-5 (HDC1000/1100)
CN-2617. 9-8 (HDC1500/1600/1550/1580/1400/1450)
CN-2608. 2-3 (HDC1000/1100)
CN-2617. 9-6 (HDC1500/1600/1550/1580/1400/1450)
CN-2608. 2-1 (HDC1000/1100)
DPR 101-92 ···
DPR 101-108 ···
CN102
For Tool
JIG DET
UP_DATE
CS2 TAC
CS2 BAR
CS2 SDI
CS2 VDA
CS2 DAP
DPR 101-109
DPR 101-107
DPR 101-105
VDA 101-71
DAP. 1-71
VDA 101-85
VDA 101-87
RCP TX (X)
RCP TX (Y)
RCP RX (X)
RCP RX (Y)
CN-2621. 1-30 (HDC1500/1600/1550/1580/1400/1450)
CN-2605. 1-1 (HDC1000/1100)
CN-2621. 1-31 (HDC1500/1600/1550/1580/1400/1450)
CN-2605. 1-2 (HDC1000/1100)
CN-2621. 1-28 (HDC1500/1600/1550/1580/1400/1450)
CN-2605. 1-3 (HDC1000/1100)
CN-2621. 1-29 (HDC1500/1600/1550/1580/1400/1450)
CN-2605. 1-4 (HDC1000/1100)
CCU TX
CCU RX
DPR 101-15
DPR 101-13
WAIT
DPR 101-103
CPU CK
DPR 101-119
CPU CLK
READY/BUSY
SUB-TRUNK-RX
SUB-TRUNK-TX
D+BUG/Sub-TRUNK
Sub-Trunk/SIO
CONF-DONE
RxCONFIG
BUSY BCS
SCK BCS
RXD BCS
TXD BCS
TXD R-PNL
RXD R-PNL
CsPro-IRQ
FAN FULL
DC-DC CONV. -109
RTC-CS
RTC-CLK
RTC-DATA
SCL-SW
SCL-SW (R)
SCL-OHB
SDA-SW
SDA-SW (R)
SDA-OHB
D+BUG TX
D+BUG RX
RESET
RE A
RE B
DRAK MS
DREQ MS
INTR MS
PLD_IRQ
CS0 (ROM)
CS2 9093A
CS2 9093B
CS2 PLD
CS2 9093A
CS2 9093B
CS2 TAC
CS2 BAR
CS2 SDI
CS2 VDA
CS2 DAP
TVDA
TVDB
RVDA
RVDB
COM RESET
PLD-VD
Board-ID 0-3
CS2-PLD
EXTAL-CLK
AU. 1-81
DAP. 1-95
VDA. 101-95
DAP. 1-101
DAP. 1-97
DAP. 1-99
DAP. 1-185
DAP. 1-183
MB-1059. 17-12 (HDC1500/1600/1550/1580/1400/1450)
AT-166. 6-2 (HDC1000/1100)
MB-1059. 17-13 (HDC1500/1600/1550/1580/1400/1450)
AT-166. 6-3 (HDC1000/1100)
CN-2617. 3-1 (HDC1500/1600/1550/1580/1400/1450)
NC (HDC1000/1100)
CN-2617. 3-2 (HDC1500/1600/1550/1580/1400/1450)
NC (HDC1000/1100)
CN-2579. 1-9 (HDC1500/1600/1550/1580/1400/1450)
CN-2609. 3-4 (HDC1000/1100)
CN-2579. 1-12 (HDC1500/1600/1550/1580/1400/1450)
CN-2609. 3-1 (HDC1000/1100)
CN-2579. 1-11 (HDC1500/1600/1550/1580/1400/1450)
CN-2609. 3-2 (HDC1000/1100)
CN-2579. 1-10 (HDC1500/1600/1550/1580/1400/1450)
CN-2609. 3-3 (HDC1000/1100)
CN-2617. 9-3 (HDC1500/1600/1550/1580/1400/1450)
MB-1060. 105-53 (HDC1000/1100)
CN-2621. 1-22 (HDC1500/1600/1550/1580/1400/1450)
NC (HDC1000/1100)
CN-2579. 3-79 (HDC1500/1550/1580/1400/1450)
CN-2723. 3-79 (HDC1600)
CN-2609. 3-7 (HDC1000/1100)
CN-2617. 9-1 (HDC1500/1600/1550/1580/1400/1450)
MB-1060. 105-55 (HDC1000/1100)
SW-1273. 4-6 (HDC1500/1600/1550/1580/1400/1450)
NC (HDC1000/1100)
CN-2579. 3-78 (HDC1500/1550/1580/1400/1450)
CN-2723. 3-78 (HDC1600)
CN-2609. 3-8 (HDC1000/1100)

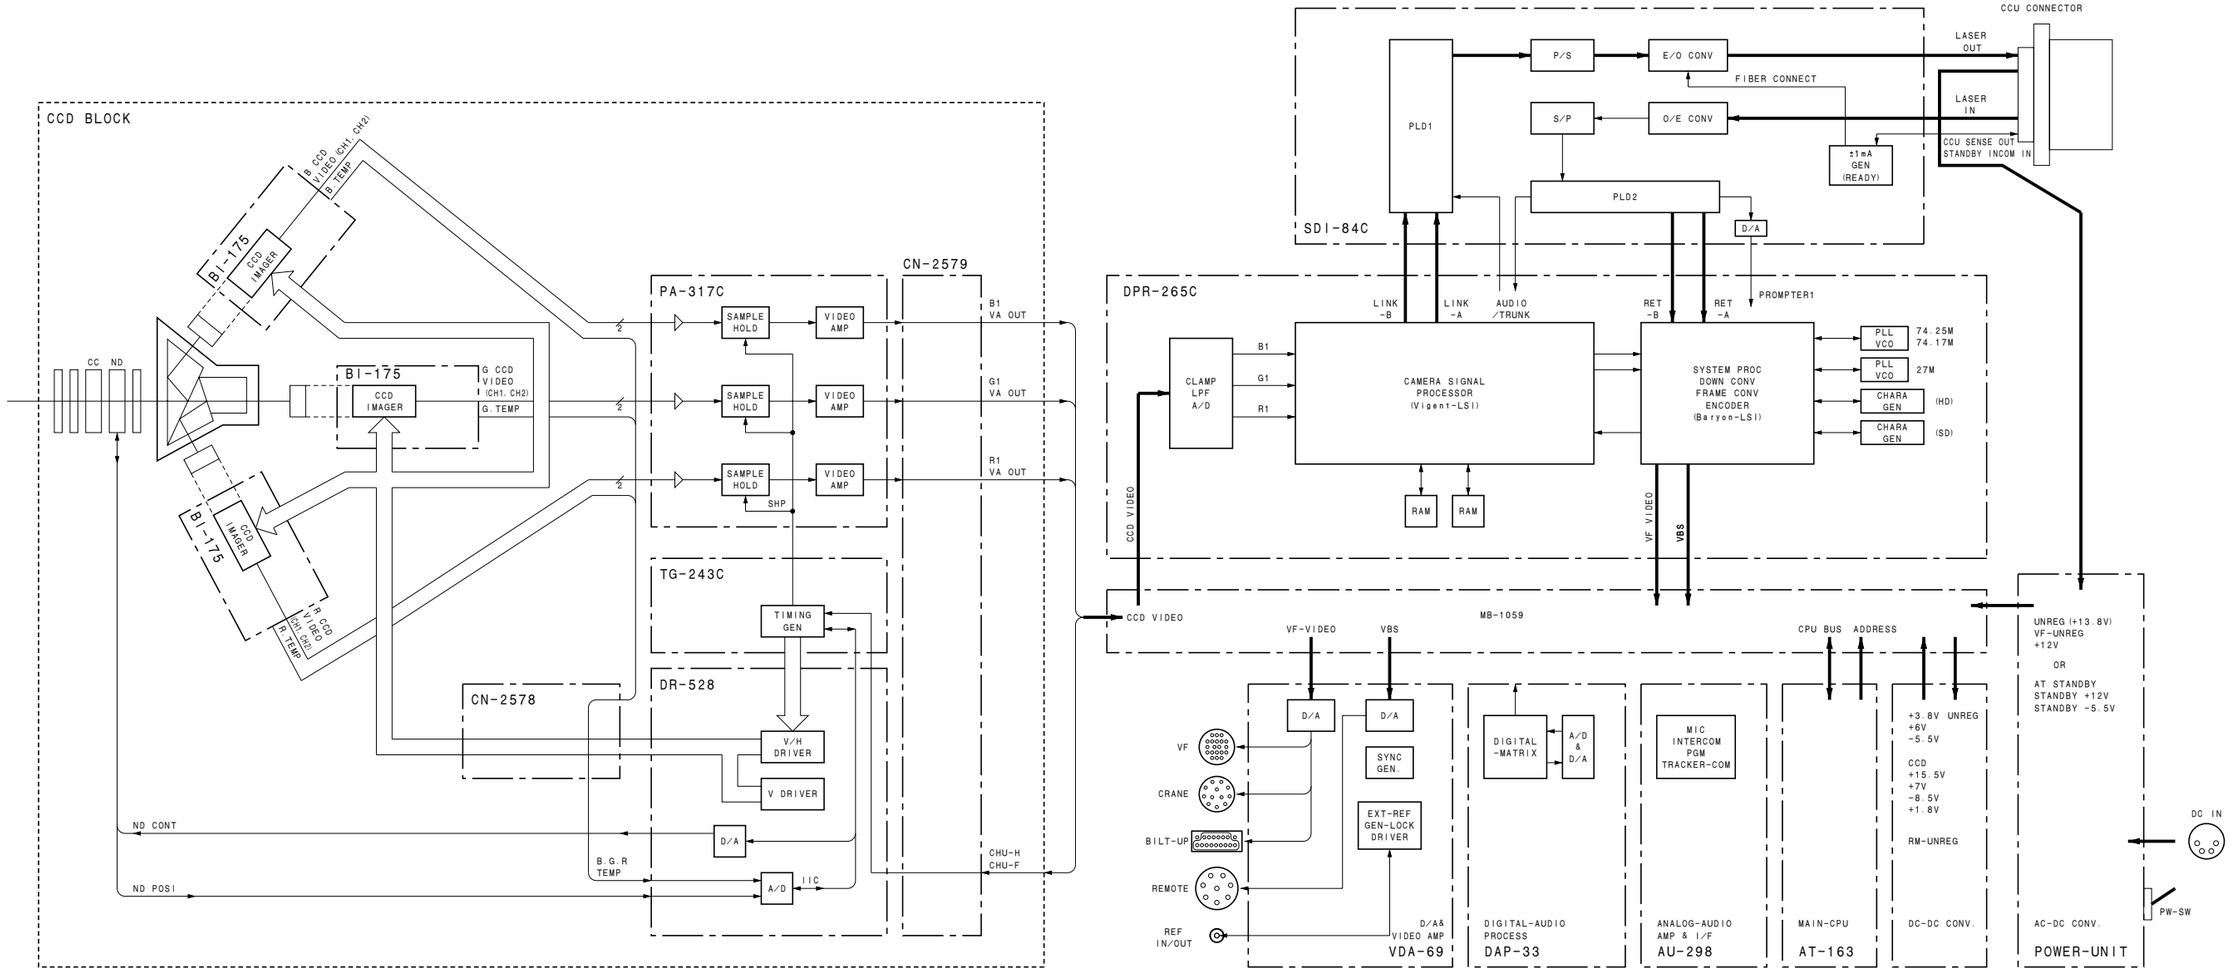

AT-163 (1/2)


IC404 (2/2)
MB-1059. 15-6 PS-Unit (HDC1500/1600/1550/1580/1400/1450)
NC (HDC1000/1100)
CN-2619. 1-27 (HDC1500/1600/1550/1580/1400/1450)
CN-2604. 1-16 (HDC1000/1100)
101-173 POWER-SW-XEXT
101-104 CRANE-HIRA-PIN
101-164 PLD-Done (DAP)
101-160 PLD-Done (VDA)
101-174 PLD-Done (OP)
101-162 ReCONFIG (DAP)
101-158 ReCONFIG (VDA)
101-172 ReCONFIG (OP)
DAP. 1-174
VDA. 101-174
OPTION. 101-174
VDA. 101-172
VDA. 101-172
OPTION. 101-172
Q401
INV
109
89
105
54
103
53
108
51
(From IC109-139)
ReCONFIG
IC401
VOLTAGE CHECK
IC402
118
EPR
+3.3V
401-1 VCC
401-3 TDI
401-4 TDO
401-5 TMS
401-6 TCK
IC403
PLD ROM
67
179
178
CONF-DONE (TO IC109-138)
CN-2616. 1-9 (HDC1500/1600/1550/1580/1400/1450)
NC (HDC1000/1100)
101-167 P-LENS-RX (Focus)
P-LENS-FOCUS-POSI
Q101
BUFF
IC101
INV
IC105
MB-1059. 17-15 (HDC1500/1600/1550/1580/1400/1450)
NC (HDC1000/1100)
101-163 S-LENS-RX (EXT-A)
RXD-LENS (TO IC109-133)
SLENS-EXT-A
81
IC145
LENS-P/S
191
CN-2616 (LENS). 1-2 (HDC1500/1600/1550/1580/1400/1450)
NC (HDC1000/1100)
101-139 Temperture (PS)-in
DC-DC CONV 110Pin
101-131 Temperture (PE)-in
DPR. 101-95
101-129 Temperture (DPR)-in
DPR. 101-93
101-127 Temperture (SD))-in
IC602
SEL
IC609
AN7
TO IC109
Analog_SEL_A
Analog_SEL_B
DPR. 101-17
101-125 PD-LEVEL-in
2.5V-REF
AN6
CN-2616. 3-13 (HDC1500/1600/1550/1580/1400/1450)
NC (HDC1000/1100)
101-135 Earphone-VR-in
IC610
AN5
DAP. 1-50
101-137 Incom-Panel-VR-in
AN4
CN-2616. 1-5 (HDC1500/1600/1550/1580/1400/1450)
MB-1060 (LENS). 17-27 (HDC1000/1100)
101-147 IFIS-POSITION-in
IC604
AN3
CN-2616. 1-10 (HDC1500/1600/1550/1580/1400/1450)
MB-1060 (LENS). 17-20 (HDC1000/1100)
101-145 ZOOM-POSITION-in
AN2
IC605
IC606
IC603
NC (HDC1500/1600/1550/1580/1400/1450)
MB-1060 (LENS). 17-19 (HDC1000/1100)
101-143 S-LENS-FOCUS-POSI-in
AN1
NC (HDC1500/1600/1550/1580/1400/1450)
MB-1060 (LENS). 17-2 (HDC1000/1100)
101-141 S-LENS-PUPIL-POSI-in
Analog_SEL_A
Analog_SEL_B
IC607
CN-2616. 1-9 (HDC1500/1600/1550/1580/1400/1450)
NC (HDC1000/1100)
101-139 P-LENS-EXTENDER-in
AN0
P-LENSE-FOCUS-POSI
IC608
UNREG
IC607
DAP. 1-103
101-30 BACKUP-BATTERY-LEVEL
Q1
REG
101-114 Unreg (+10.5V+17V)
101-112 Unreg (+10.5V+17V)
+10V
UNREG
IC3 (2/2). Q2
+3.3V
101-190 +3.8V
101-188 +3.8V
101-186 +3.8V
101-184 +3.8V
101-182 +3.8V
101-180 +3.8V
101-178 +3.8V
101-176 +3.8V
IC2. 3 (1/2). Q3
101-28 +6V
101-26 +6V
101-24 +6V
101-22 +6V
+5V
+2.5V-REF
+1.5V
IC1
101-10 -5.5V
101-8 -5.5V
-5.5V
101-6 -5.5V (PTBL/STD-ID)
Portable/Studio-ID-in
PLD (2/2)
IC408
LEVEL SHIFT
IC611
12bit D/A
IC601
LEVEL SHIFT INV
IC612
8bit D/A
IRIS-CTRL 101-111
CN-2616. 2-9 (HDC1500/1600/1550/1580/1400/1450)
MB-1060. 17-3 (HDC1000/1100)
UP-TALLY-CTRL 101-113
NC (HDC1500/1600/1550/1580/1400/1450)
LE-291. 1-7 (HDC1000/1100)
FAN (Rear)-CTRL 101-115
DC-DC CONV. 93pin (HDC1500/1600/1550/1580/1400/1450)
NC (HDC1000/1100)
FAN (Front)-CTRL 101-117
DC-DC CONV. 95pin (HDC1500/1600/1550/1580/1400/1450)
DC-DC CONV. -93. 95 (HDC1000/1100)
FAN (Rear)-ON 101-119
DC-DC CONV. 101pin (HDC1500/1600/1550/1580/1400/1450)
NC (HDC1000/1100)
FAN (Front)-ON 101-121
DC-DC CONV. 103pin (HDC1500/1600/1550/1580/1400/1450)
RE-221. 106-101. 103 (HDC1000/1100)
FAN (Rear)-Detect 101-149
MB-1059. 18-3 (HDC1500/1600/1550/1580/1400/1450)
NC (HDC1000/1100)
FAN (Front)-Detect 101-151
MB-1059. 4-3 (HDC1500/1600/1550/1580/1400/1450)
MB-1060. 2-3 (HDC1000/1100)
BCS-CMD-RST 101-42
CN-2579. 1-8 to PA317 (HDC1500/1600/1550/1580/1400/1450)
CN-2609. 3-5 (HDC1000/1100)
BCS-HARD-RST 101-40
TXD-LENS (From IC109-134)
IC101
INV
IC102
LEVEL SHIFT
P-LENS-TX 101-169
CN-2579. 1-7 to PA317 (HDC1500/1600/1550/1580/1400/1450)
CN-2609. 3-6 (HDC1000/1100)
CN-2616. 1-12to LENS CN (HDC1500/1600/1550/1580/1400/1450)
NC (HDC1000/1100)
IRIS-AUTO
S-LENS-TX 101-165
MB-1059. 17-14 (HDC1500/1600/1550/1580/1400/1450)
MB-1060. 17-4 (HDC1000/1100)
SWIRE serial DATA 101-65
AU. 1-79
SWIRE serial CLK 101-63
AU. 1-77
SWIRE serial LD (VDA) 101-61
VDA. 101-65
SWIRE serial LD (AU) 101-59
AU. 1-75
SWIRE serial DATA in 101-57
AU. 1-73
SWIRE OHB DATA 101-64
SWIRE OHB CLK 101-62
SWIRE OHB LD (TG) 101-58
SWIRE OHB LD (BL) 101-56
SWIRE OHB LD (DR) 101-54
SWIRE OHB LD (SH) 101-52
SWIRE OHB LD (PA) 101-60
OHB RESET 101-97
CN-2579. 3-80 (HDC1500/1550/1580/1400/1450)
CN-2723. 3-80 (HDC1600)
CN-2609. 3-21 (HDC1000/1100)
Chara IC TX 101-103
DPR. 101-118
Chara IC CLK 101-101
DPR. 101-120
Tally (G) UP/Back 101-177
CN2618. 1-9 (HDC1500/1600/1550/1580/1400/1450)
LE-291. 1-2 (HDC1000/1100)
Tally (R) UP/Back 101-179
CN2618. 1-8 (HDC1500/1600/1550/1580/1400/1450)
LE-291. 1-1 (HDC1000/1100)
Tally (G) VF 101-181
CN-2614. 3-3 (HDC1500/1600/1550/1580/1400/1450)
MB-1060. 14-8 (HDC1000/1100)
Tally (R) VF 101-183
CN-2614. 3-2 (HDC1500/1600/1550/1580/1400/1450)
MB-1060. 14-7 (HDC1000/1100)
Tally (R) LENS 101-175
NC (HDC1500/1600/1550/1580/1400/1450)
MB-1060. 105-175 (HDC1000/1100)
0405
OPEN Collector
Tally (G) CA 101-185
MB-1059. 7-10 (HDC1500/1600/1550/1580/1400/1450)
AT-166. 6-14 (HDC1000/1100)
0402
Tally (R) CA 101-187
MB-1059. 7-11 (HDC1500/1600/1550/1580/1400/1450)
AT-166. 6-13 (HDC1000/1100)
0406
Tally (G) Tracker 101-189
CN-2619. 1-32 (HDC1500/1600/1550/1580/1400/1450)
CN-2604. 1-2 (HDC1000/1100)
0407
Tally (R) Tracker 101-191
CN-2619. 1-33 (HDC1500/1600/1550/1580/1400/1450)
CN-2604. 1-9 (HDC1000/1100)
0404
VF POWER OFF 101-171
MB-1059. 15-1 (HDC1500/1600/1550/1580/1400/1450)
MB-1060. 13-12 (HDC1000/1100)
MAIN-V (from DPR) 101-193
DPR. 101-146
MAIN-H (from DPR) 101-195
DPR. 101-144
RCP-etc power-NG 101-153
NC (HDC1000/1100)
DC-DC CONV-87pin (HDC1500/1600/1550/1580/1400/1450)
CA-sense-in (from PS) 101-155
NC (HDC1000/1100)
MB-1059. 15-8 (HDC1500/1600/1550/1580/1400/1450)
Audio Mute ON/OFF 101-156
AU. 1-156
DAP. 1-156
Analog_SEL_A
Analog_SEL_B
IC406
SCL VF 101-41
CN-2614. 3-7 (HDC1500/1600/1550/1580/1400/1450)
NC (HDC1000/1100)
IC406. 407
SDA VF in/out 101-43
CN-2614. 3-8 (HDC1500/1600/1550/1580/1400/1450)
NC (HDC1000/1100)
SCL EXT VF 101-37
CN-2619. 1-34 (HDC1500/1600/1550/1580/1400/1450)
CN-2604. 1-17 (HDC1000/1100)
SDA EXT VF in/out 101-39
CN-2619. 1-35 (HDC1500/1600/1550/1580/1400/1450)
CN-2604. 1-18 (HDC1000/1100)
CN-2579. 3-53 (HDC1500/1550/1580/1400/1450)
CN-2723. 3-53 (HDC1600)
CN-2609. 3-15 (HDC1000/1100)
CN-2579. 3-55 (HDC1500/1550/1580/1400/1450)
CN-2723. 3-55 (HDC1600)
CN-2609. 3-14 (HDC1000/1100)
CN-2579. 3-56 (HDC1500/1550/1580/1400/1450)
CN-2723. 3-56 (HDC1600)
CN-2609. 3-12 (HDC1000/1100)
CN-2579. 3-57 (HDC1500/1550/1580/1400/1450)
CN-2723. 3-57 (HDC1600)
CN-2609. 3-11 (HDC1000/1100)
CN-2579. 3-58 (HDC1500/1550/1580/1400/1450)
CN-2723. 3-58 (HDC1600)
CN-2609. 3-10 (HDC1000/1100)
CN-2579. 3-60 (HDC1500/1550/1580/1400/1450)
CN-2723. 3-60 (HDC1600)
CN-2609. 3-9 (HDC1000/1100)
CN-2579. 3-54 (HDC1500/1550/1580/1400/1450)
CN-2723. 3-54 (HDC1600)
CN-2609. 3-13 (HDC1000/1100)

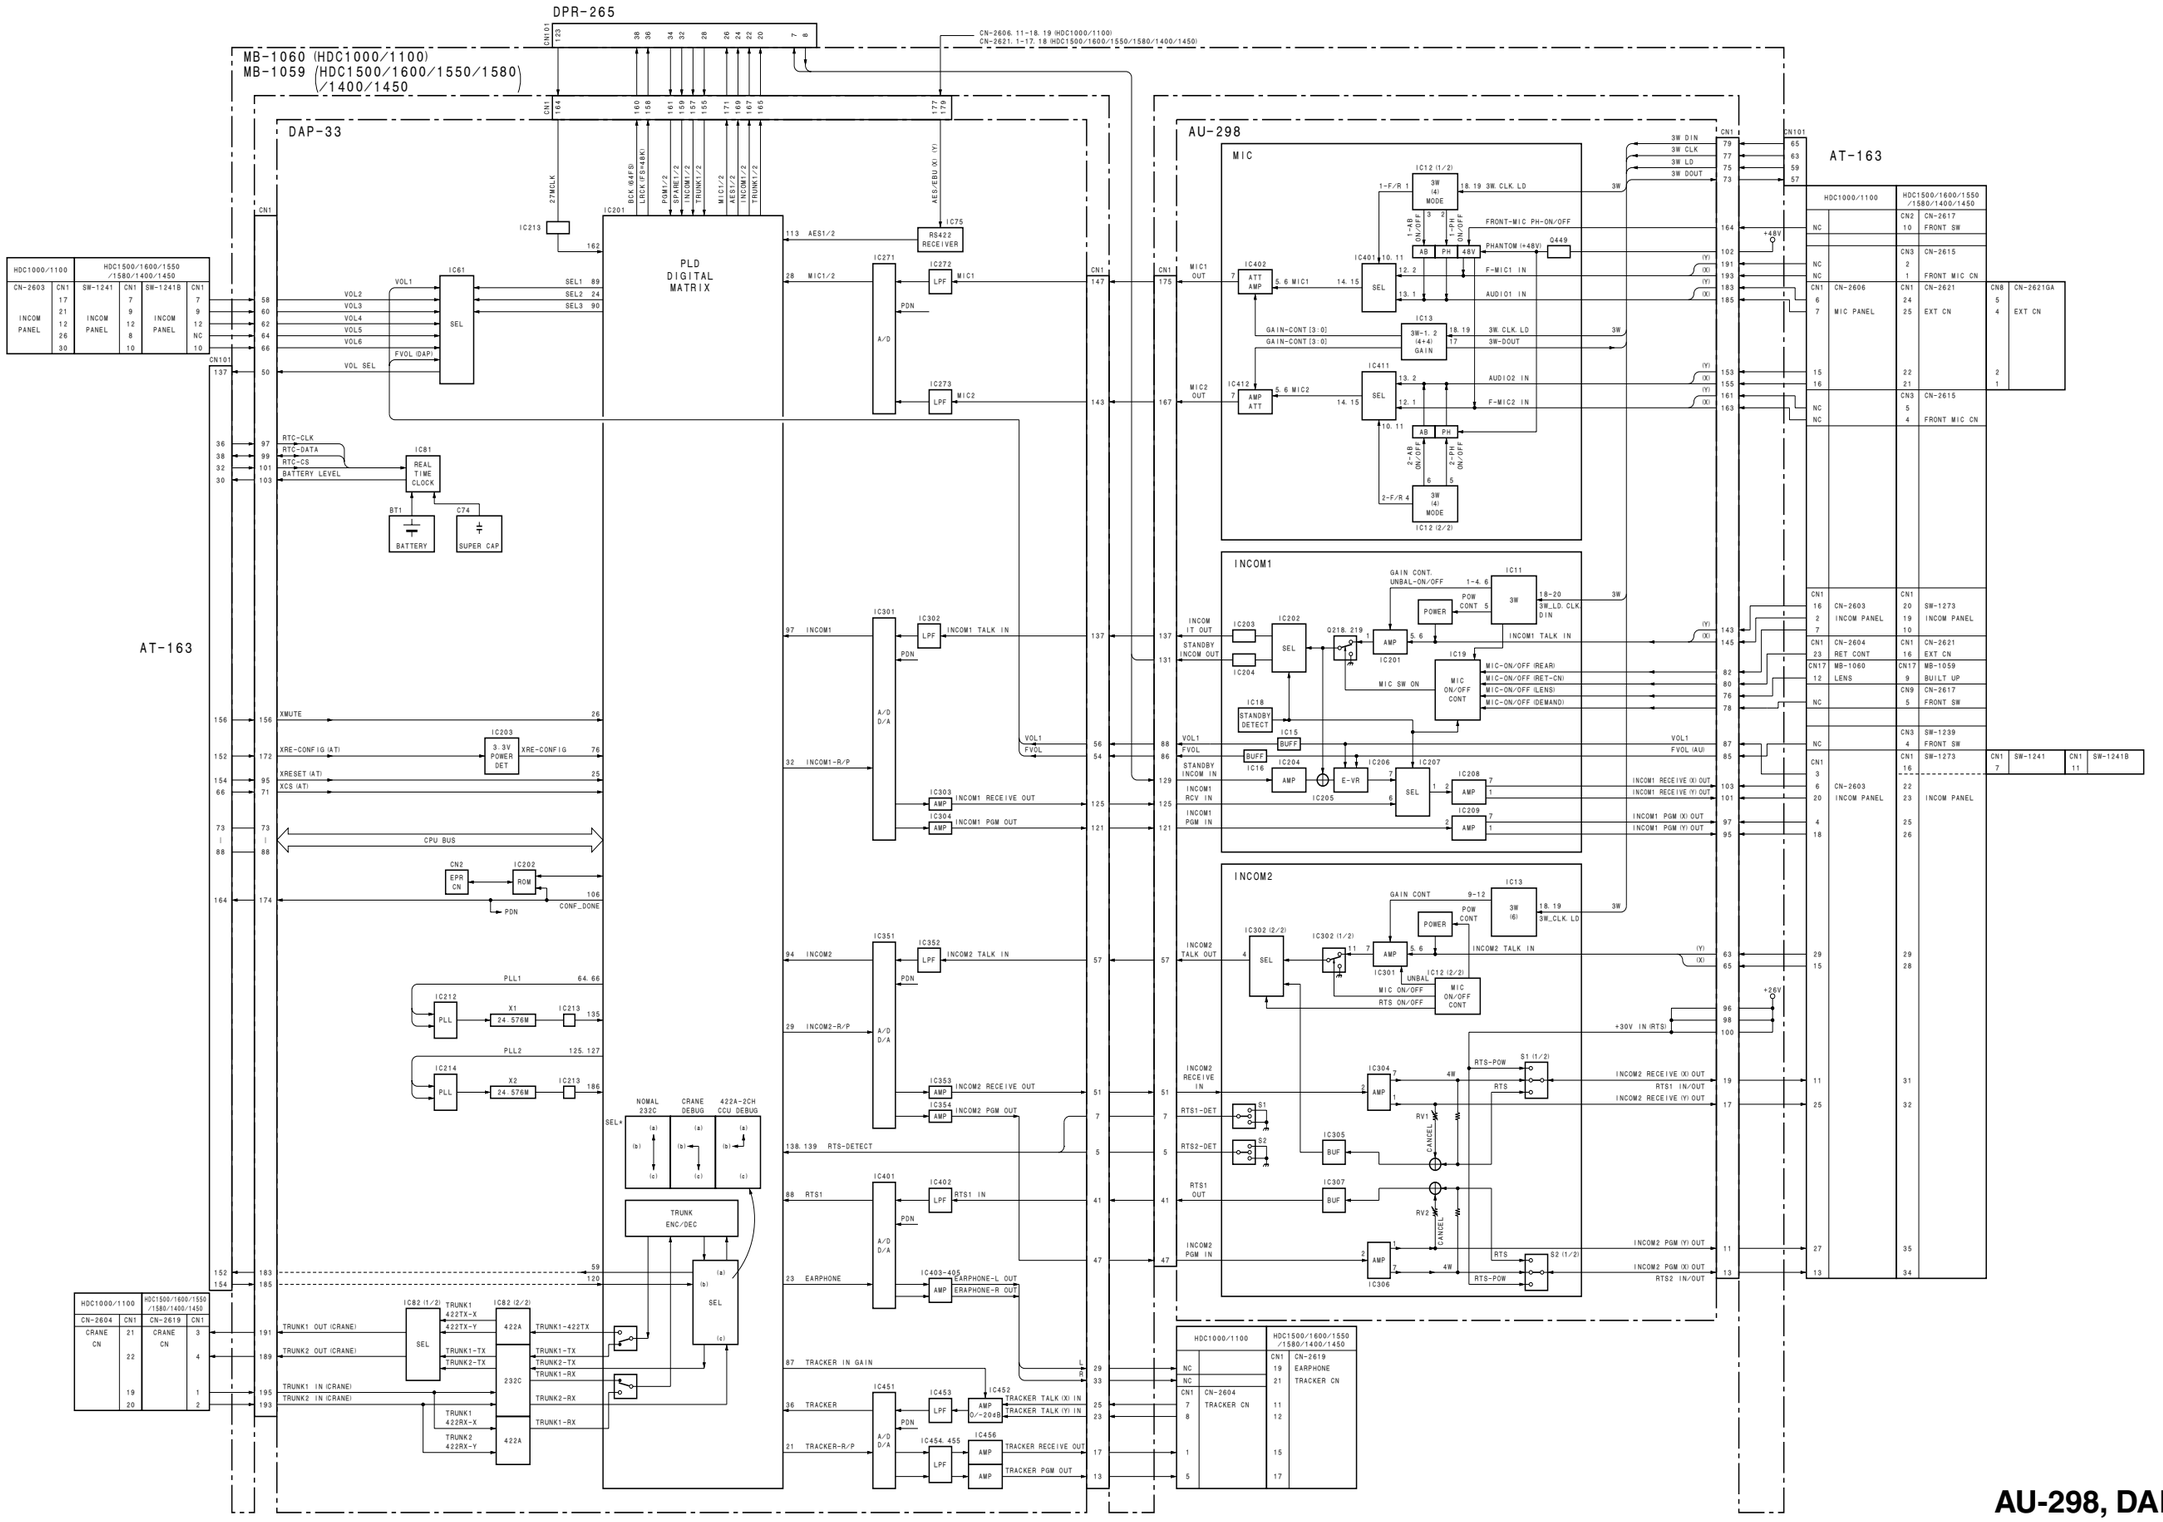AT-163 (2/2)

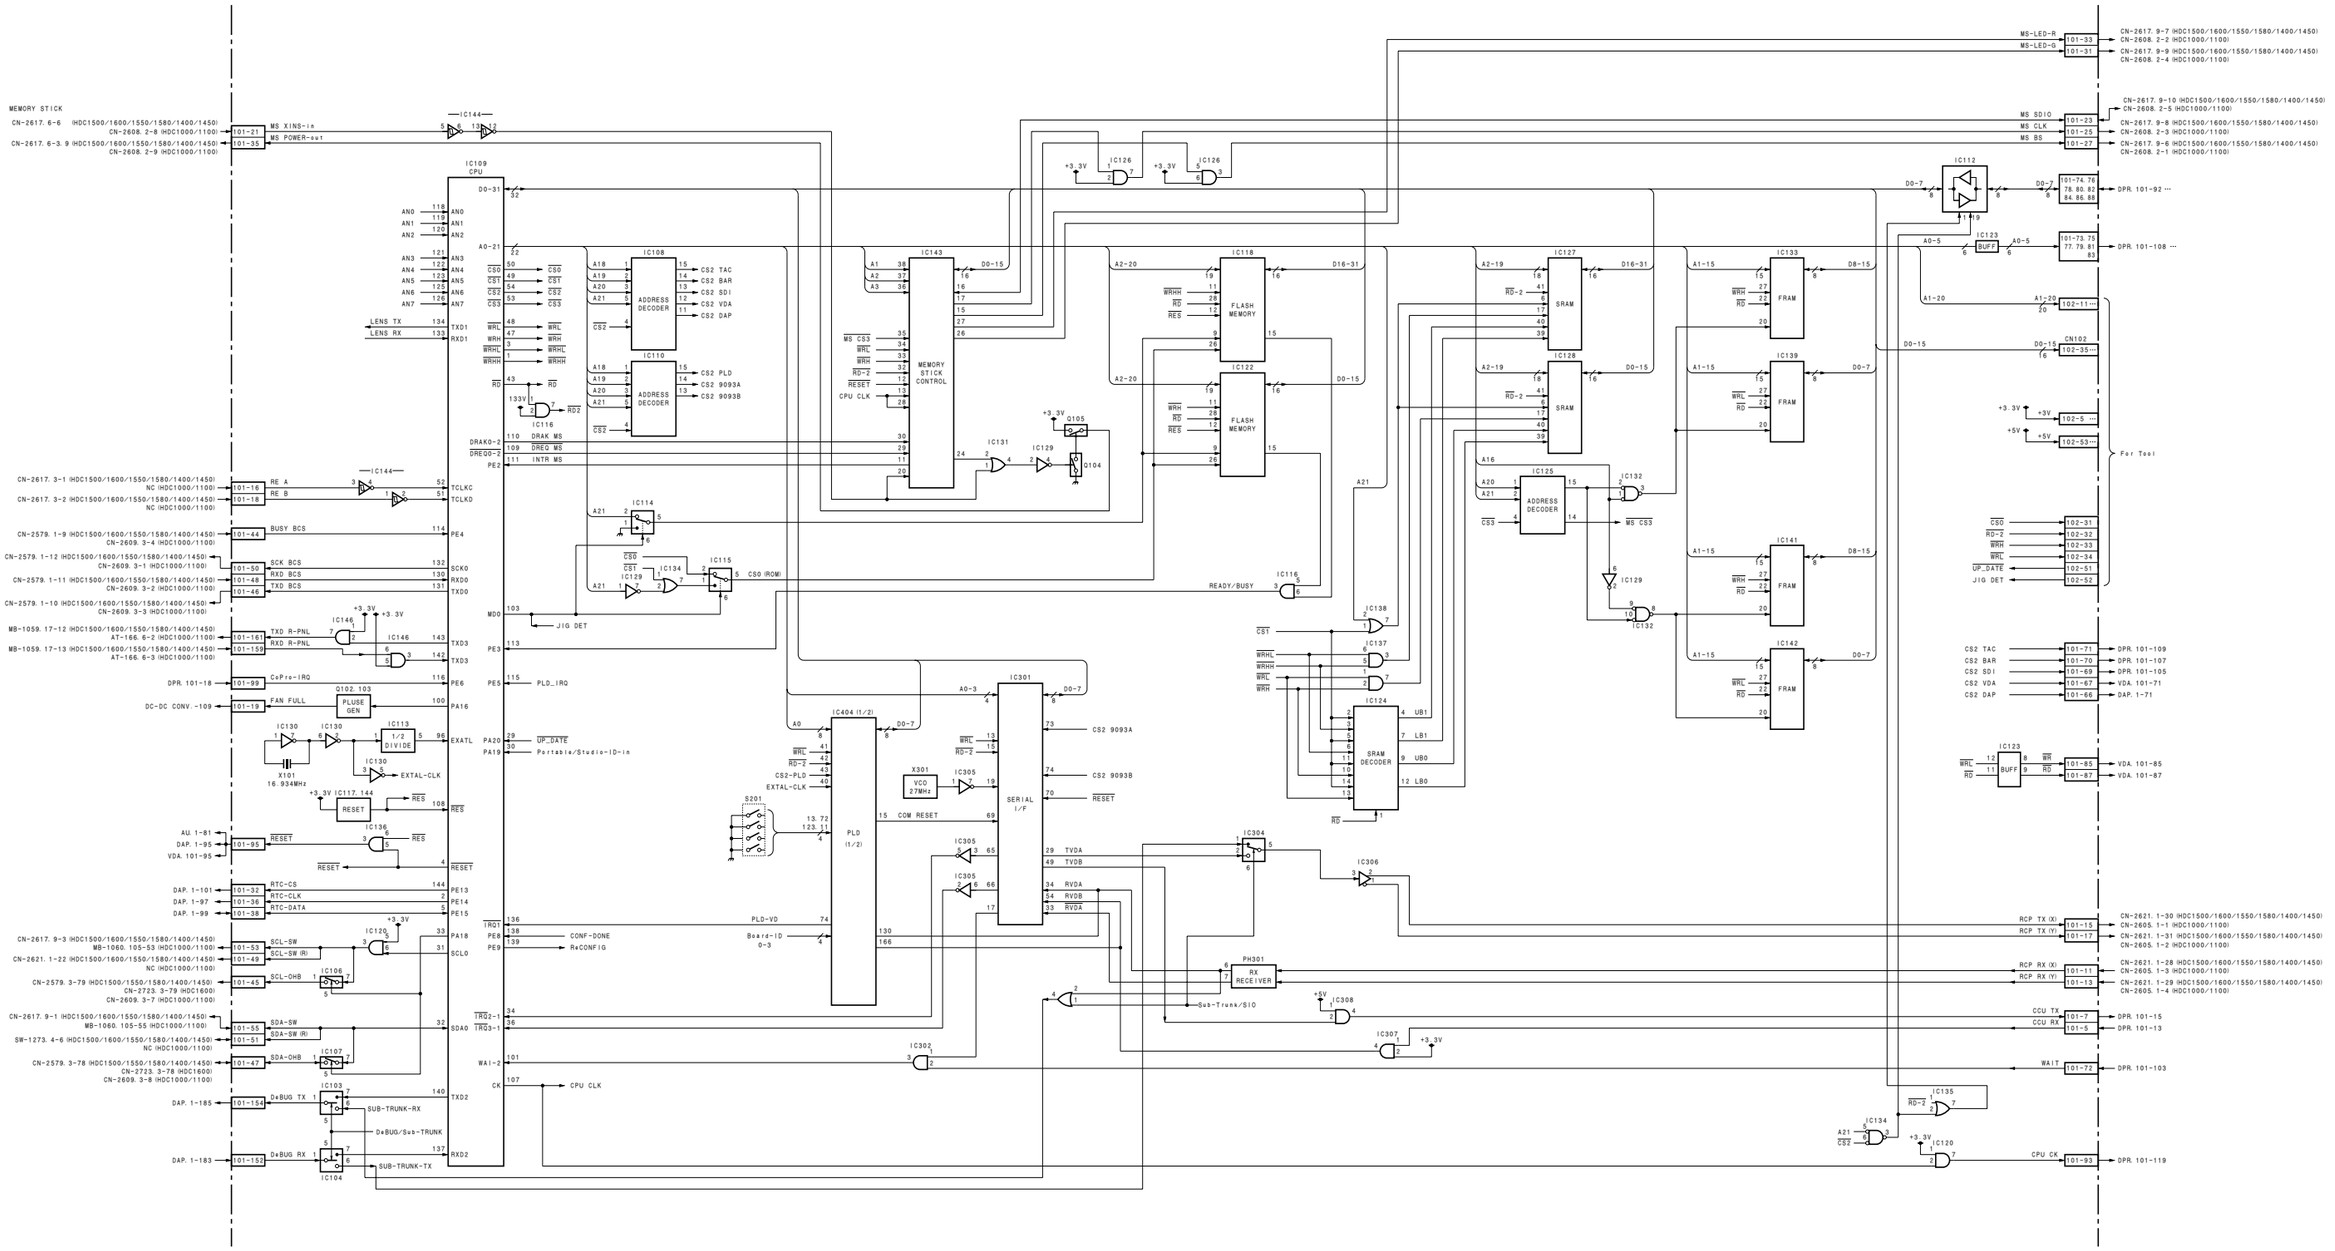


**DPR-265**
HDC1000/1100/1400/1450/1500/1550/1600

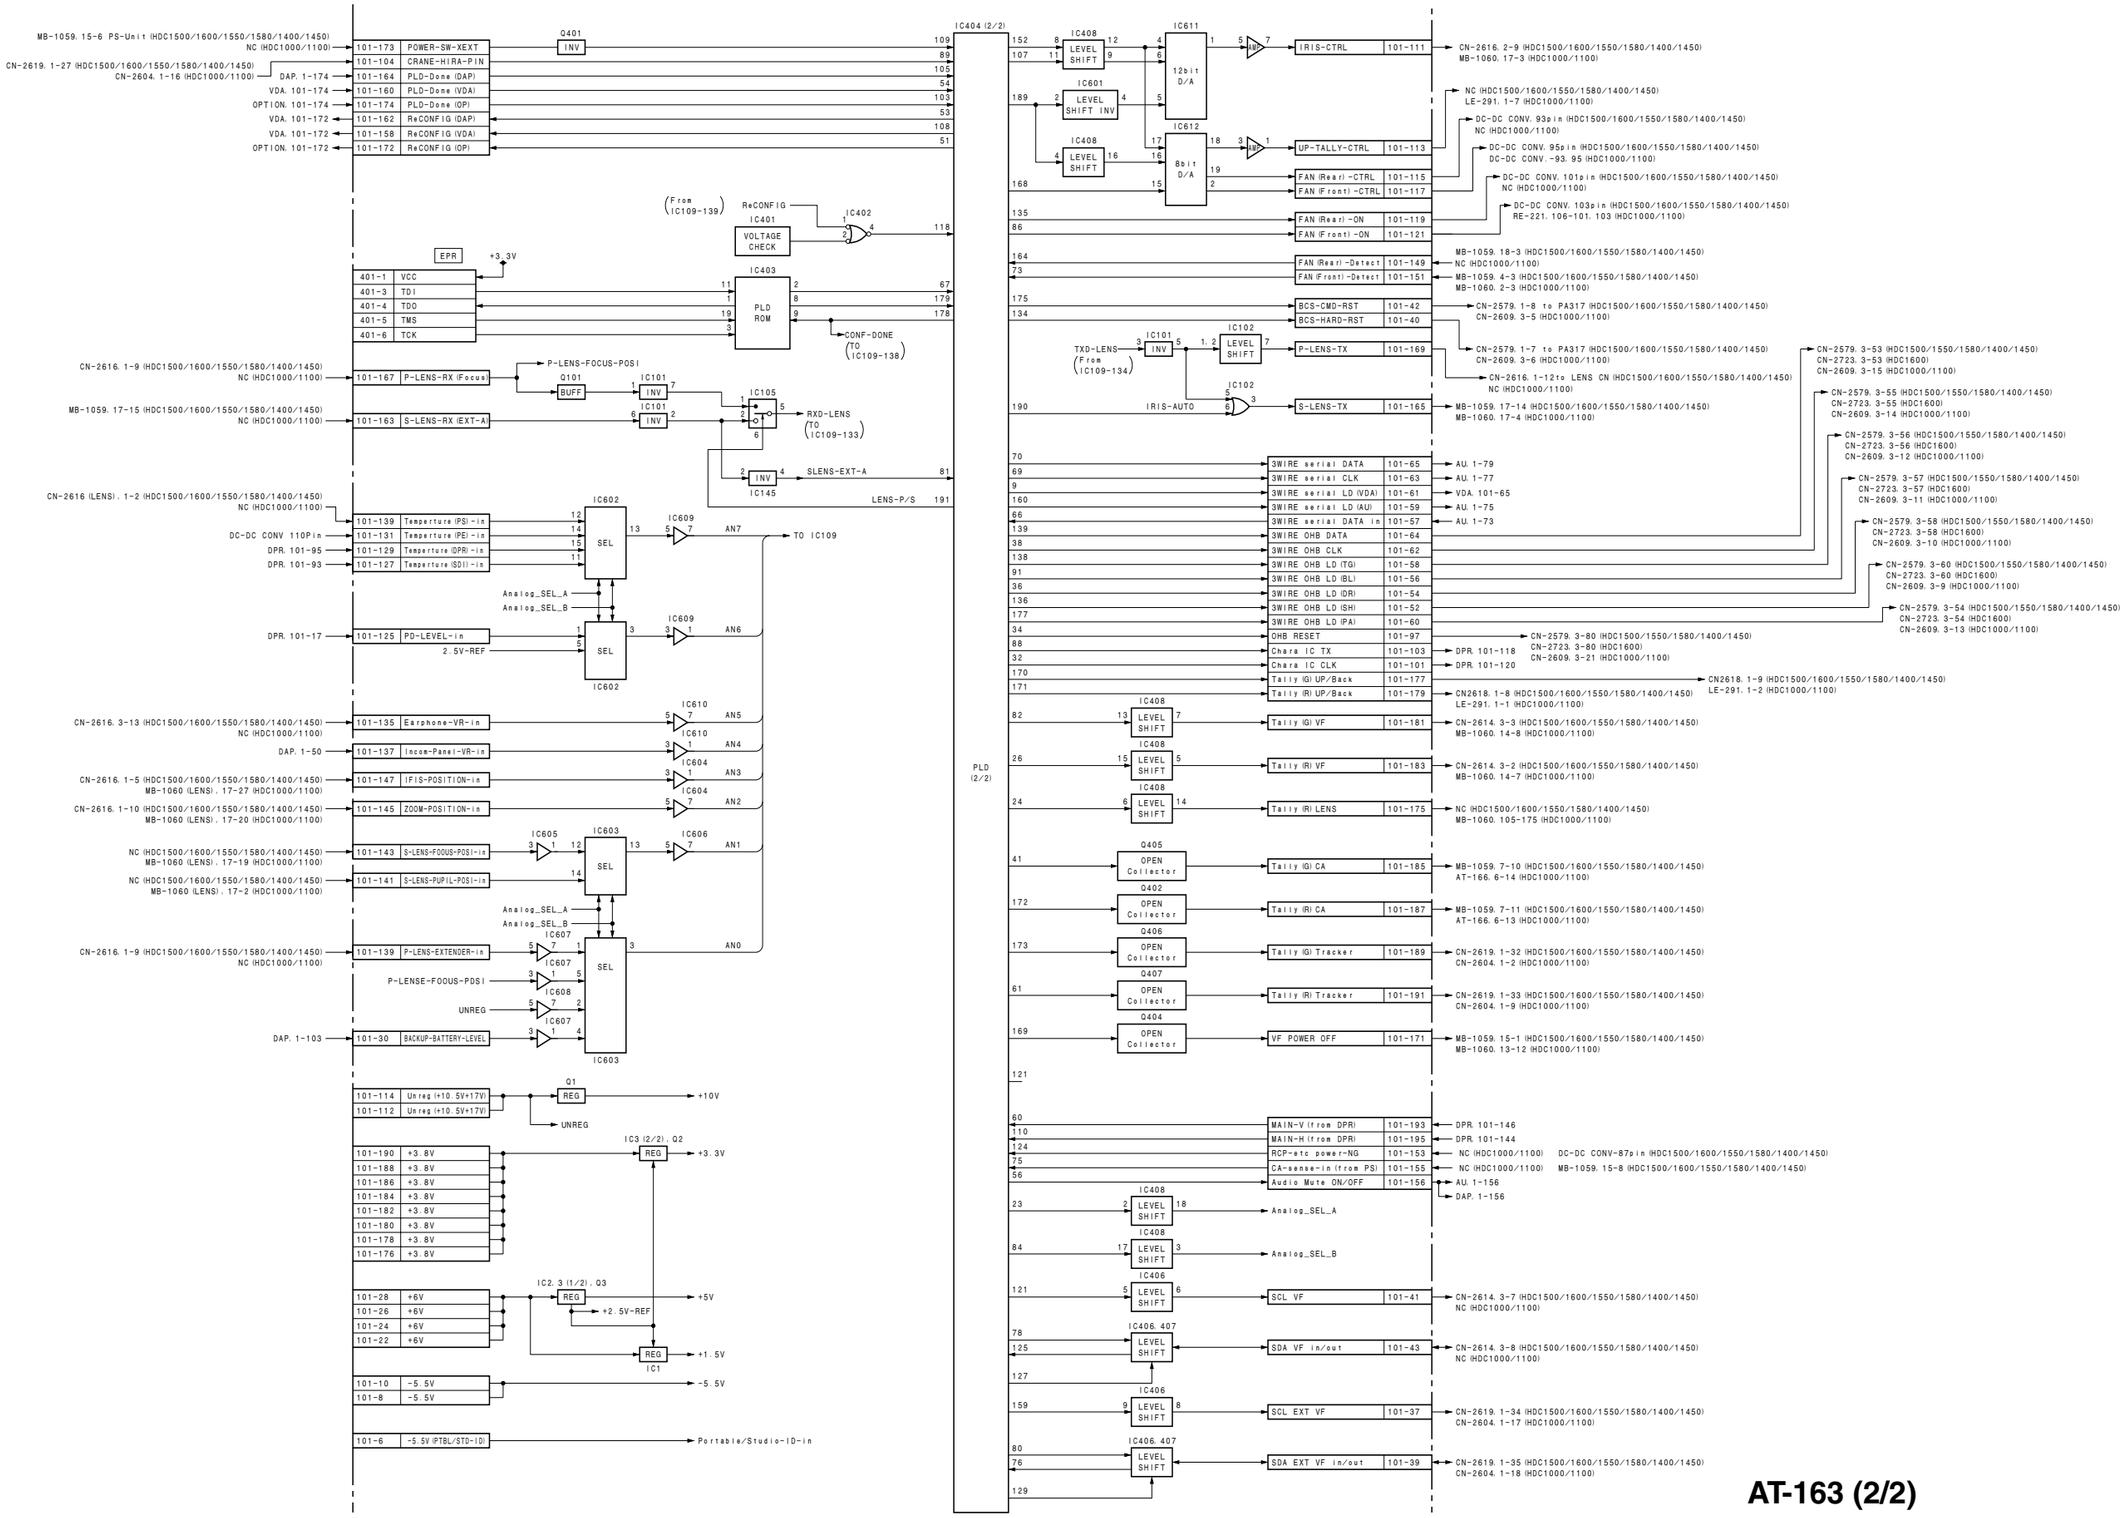


**DPR-265C**
HDC1580

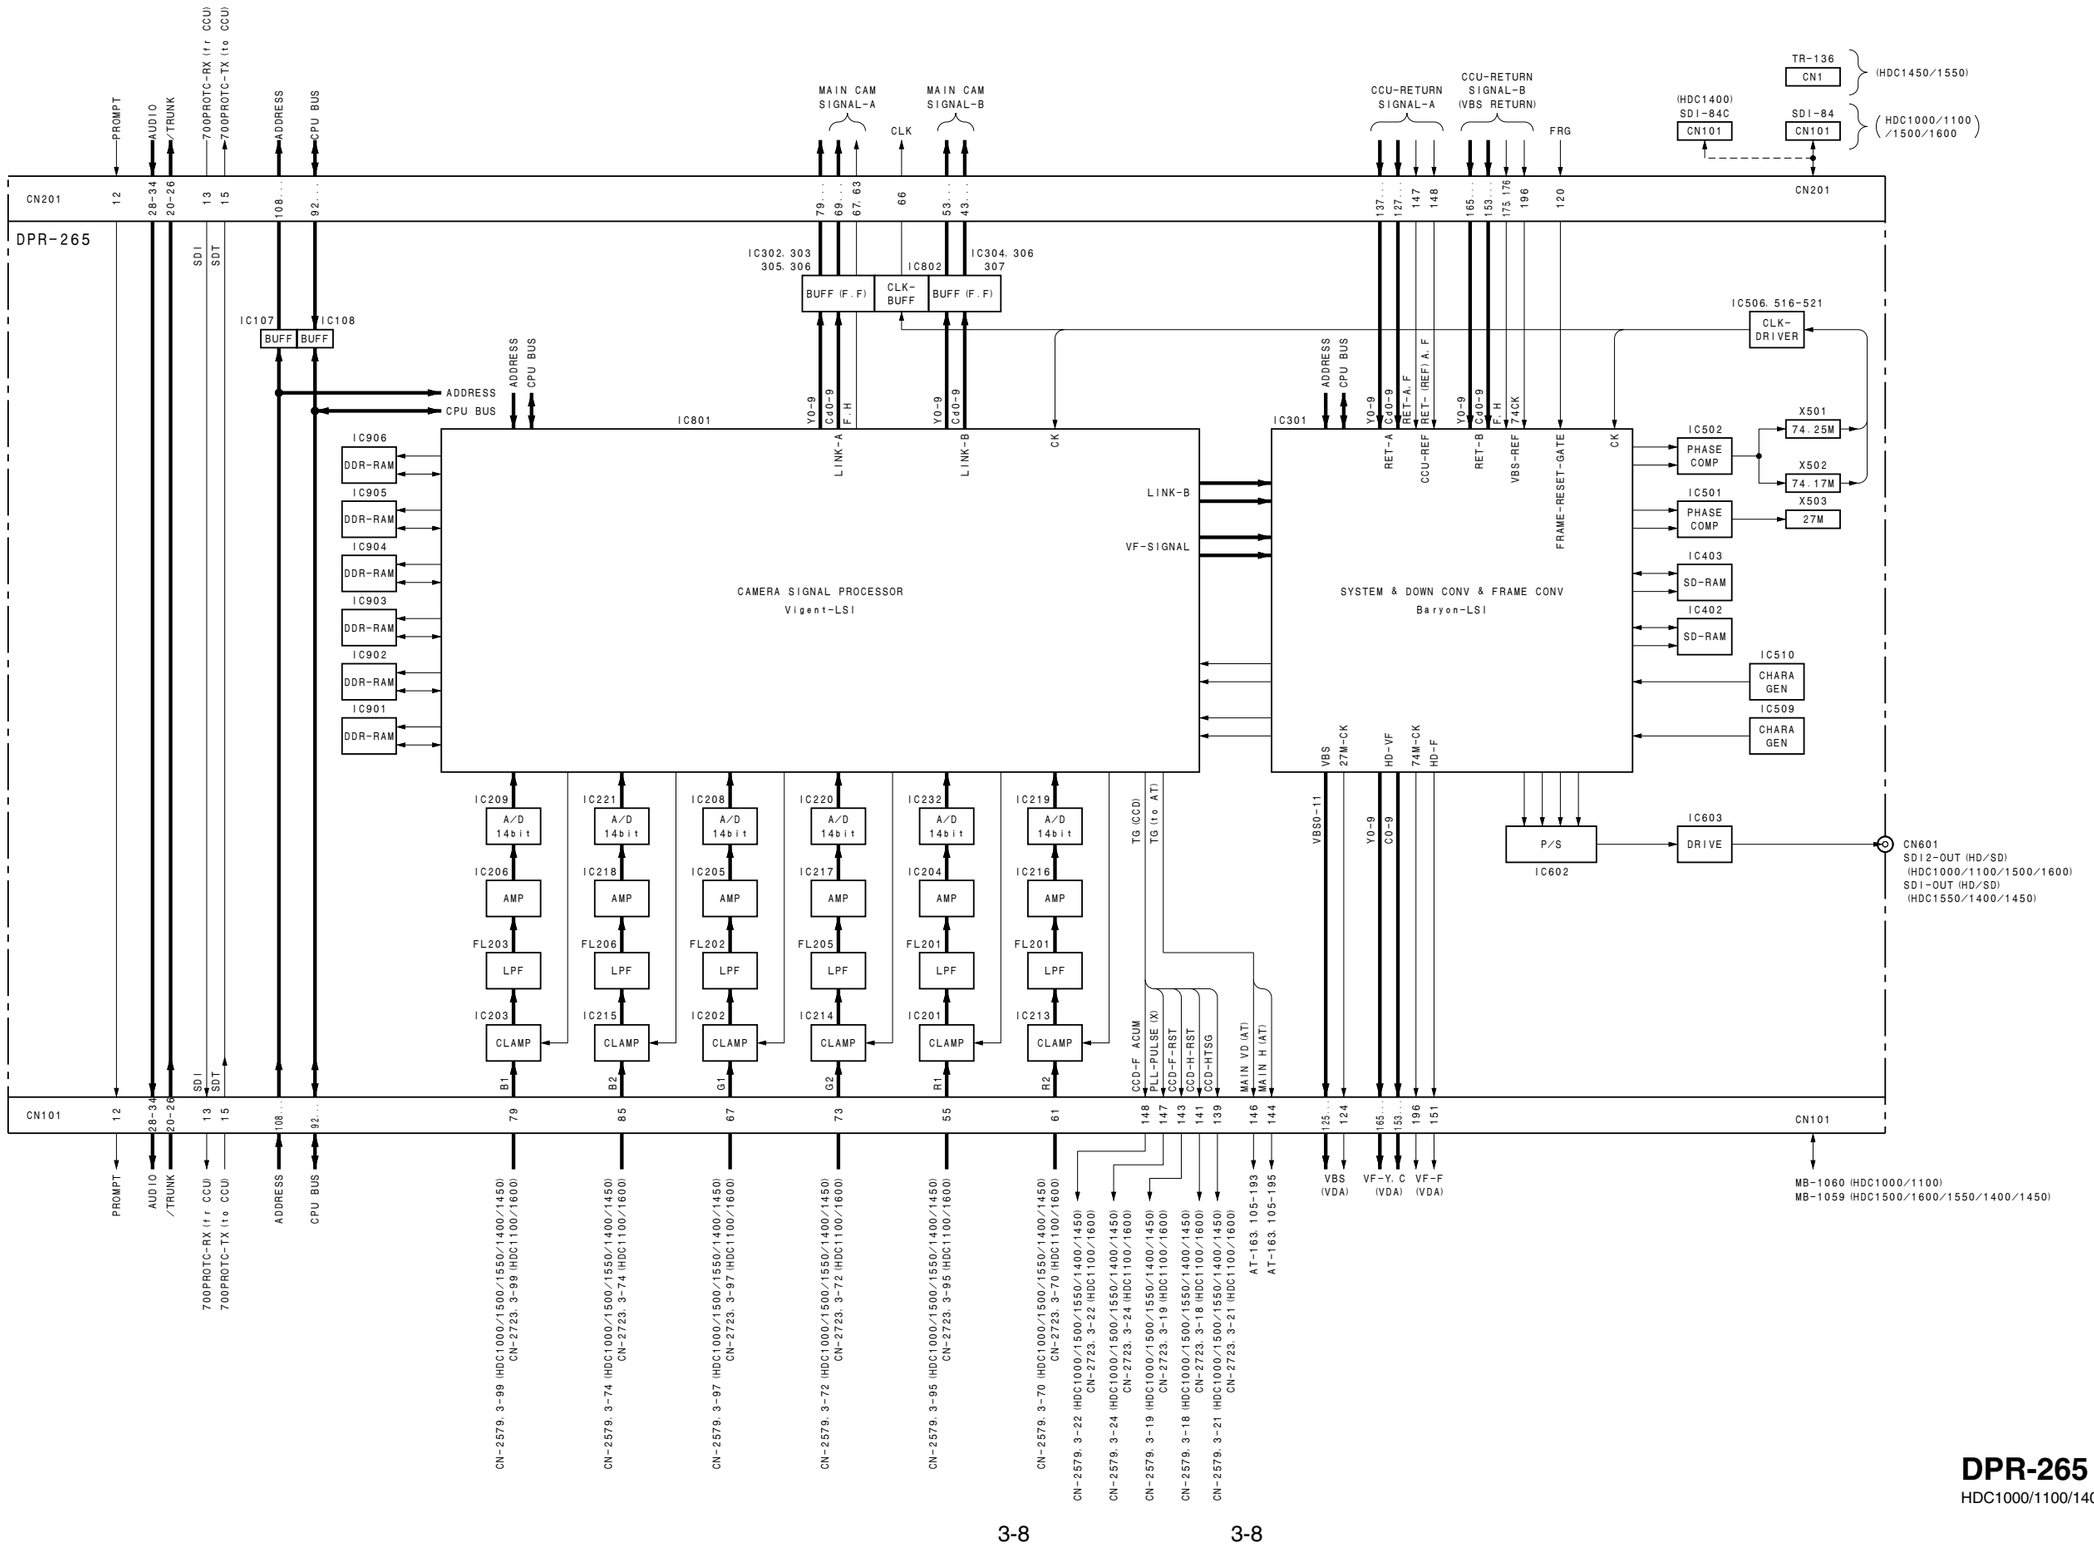


**SDI-84**
HDC1000/1100/1500/1600

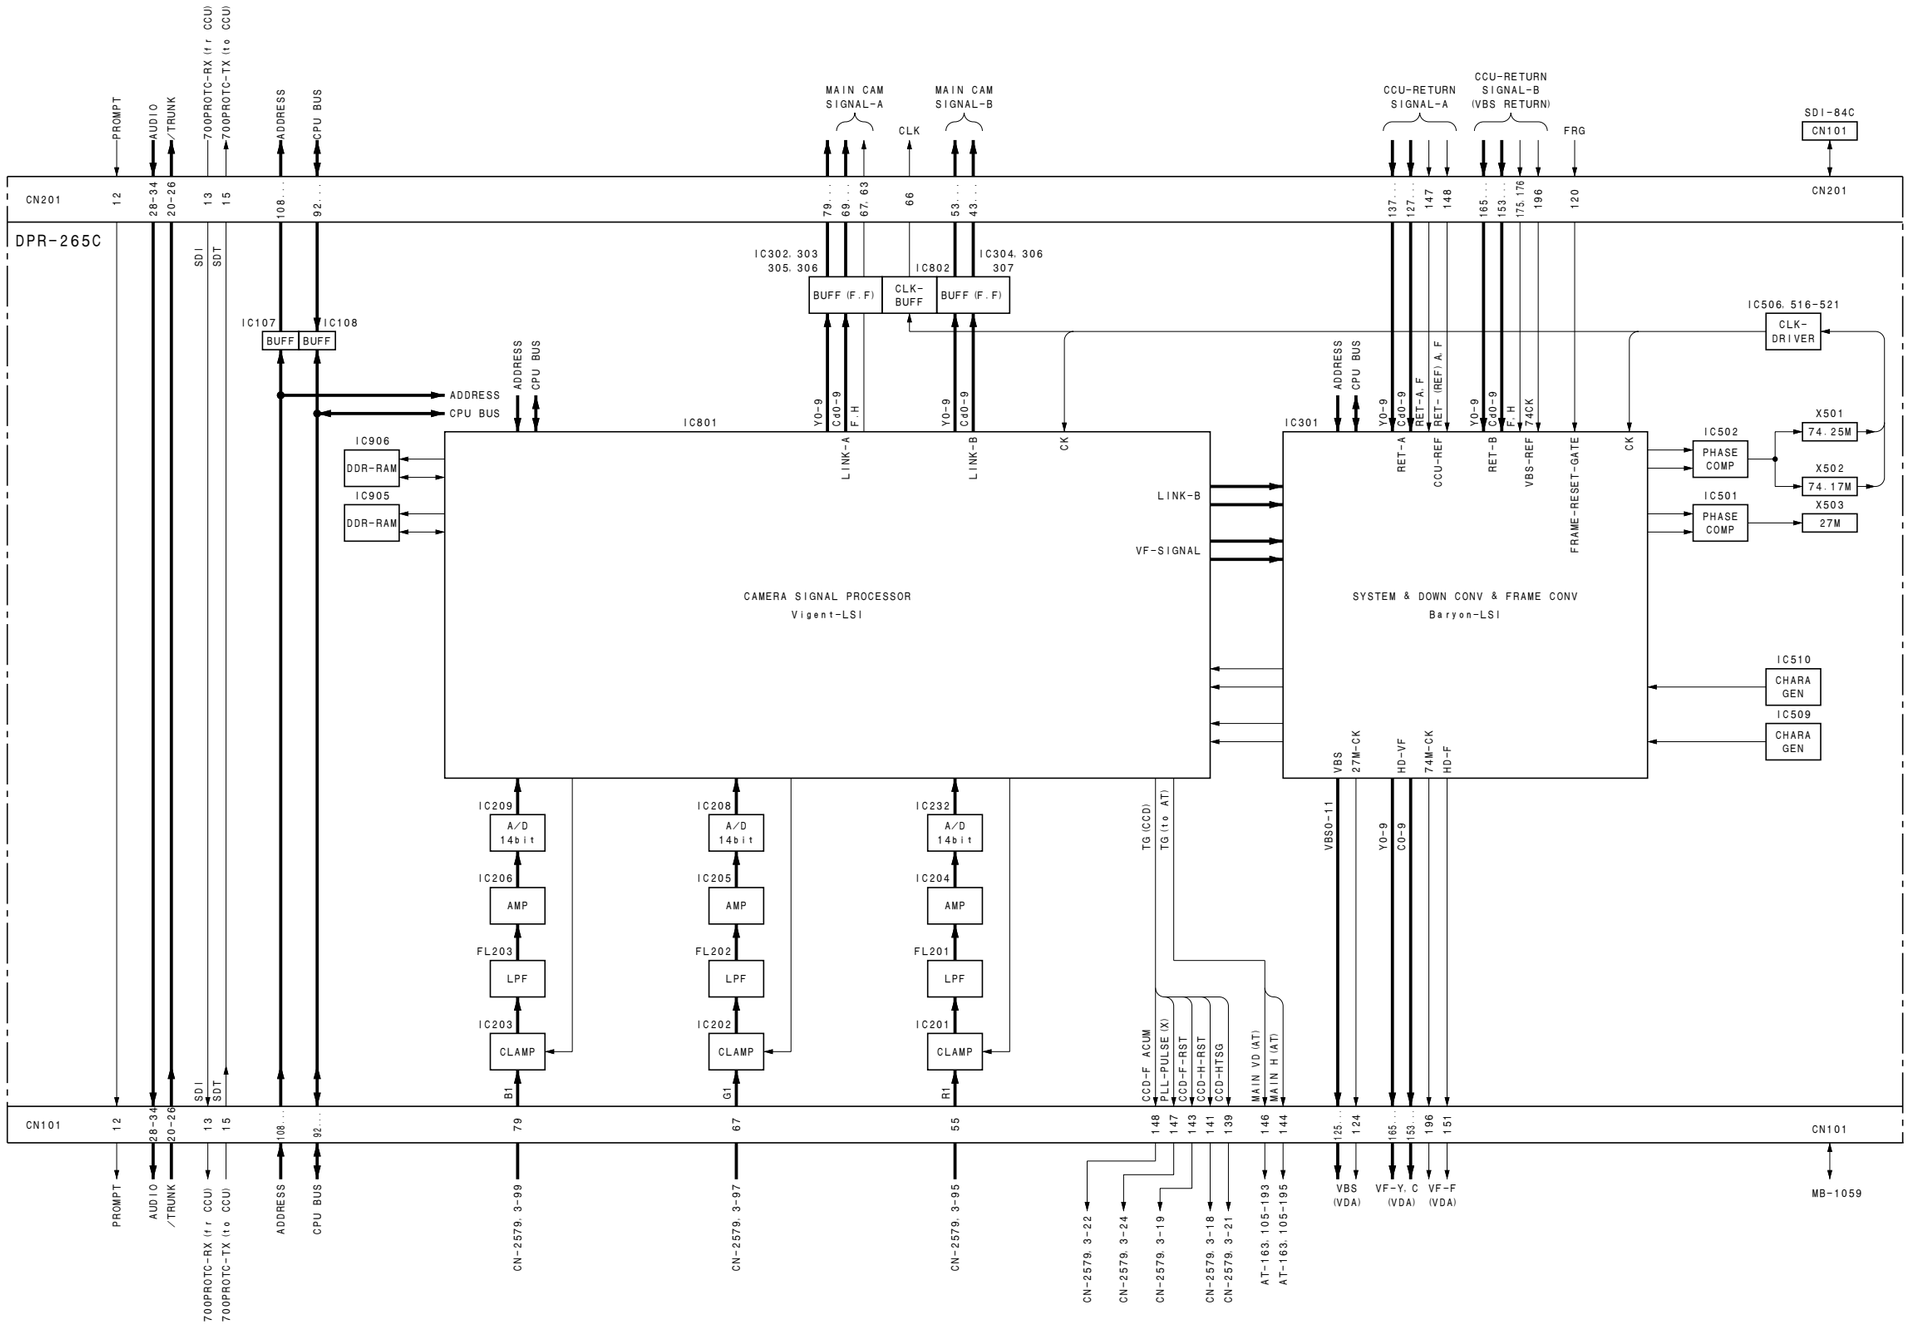


**SDI-84C**
HDC1400/1580


IC111-113
4:2:2 D/A
Y, Pb, Pr
30
IC110
PLD
VF-Y, C
20
101-145
101-183
DPR, 101-154...
VF-SYNC (0), (1)
74M
HD-SYNC (0), (1)
SD-SYNC
VF-SYNC (0) (1)
74M
74CK-IN
VDA-F
VF-F (VDA) IN
SD-SYNC
27M
27CK-IN
101-185, 187
101-195
101-143
101-137
101-109
DPR, 101-175, 176
DPR, 101-124
DPR, 101-151
DPR, 101-152
DPR, 101-124
IC100
BUFF
VF-SYNC LPF
IC102, 104
FL100-102
LPF
CPU-BUS (0-7)
ADDR (0-4) IN
101-74
101-88
101-108
101-116
AT-163, 101-74...
AT-163, 101-73...
IC306
SD-SYNC LPF
IC309
BUFF
IC114-116
HD-Y
HD-Pb
HD-Pr
CN100
EPR
8P
IC109
CONFIG ROM
IC106
BUFF
SD-SYNC-CLP
PEPE-CLP
VBS-IN
12
101-113
101-135
DPR, 101-125...
IC312
D/A
27M
27CK-OP-OUT
101-164
MB-1059/1060, 101-195
HD-SYNC LPF
TEMP-H
TEMP-F
FL300
LPF
MONI-OUT
VBS-OUT
CAPTION-OUT
101-56
101-52
101-60
CN-2622, 2-8 (HDC1500/1600/1550/1580/1400/1450)
CN-2605, 2-8 (HDC1000/1100)
MB-1059, 5-1 (HDC1500/1600/1550/1580/1400/1450)
MB-1060, 1-1 (HDC1000/1100)
MB-1059, 101-59 (HDC1500/1600/1550/1580/1400/1450)
MB-1060, NC (HDC1000/1100)
VBS
IC316
IC315
SD-SYNC
IC317
Q312-323
SELECTOR
HD-SYNC
HD-Y
IC320
ANALOG-OUT
101-44
CN-2620, 2-1 ANALOG OUT (HDC1500/1600/1550/1580/1400/1450)
MB-1060, 29-1 TEST (HDC1000/1100)
IC302
REF SEL
IC303
TEMP SYNC-SEP
IC324-326
304, 305
GEN-LOCK DRIVER
IC308
REF-H, F
101-101, 103
DPR, 101-140, 142
Q304
-311
SD/HD
SELECTOR
IC310
EXT-REF-IN
101-47
CN-2619, 1-39 (HDC1500/1600/1550/1580/1400/1450)
MB-1060, NC (HDC1000/1100)
IC318
VF-Y-OUT
101-7
CN-2614, 1-12 (HDC1500/1600/1550/1580/1400/1450)
MB-1060, 14-1 (HDC1000/1100)
IC319
BUILT-UP-Y-OUT
101-11
MB-1059, 17-1 (HDC1500/1600/1550/1580/1400/1450)
MB-1060, NC (HDC1000/1100)
CRANE-Y-OUT
101-15
CN-2619, 5-9 (HDC1500/1600/1550/1580/1400/1450)
CN-2604, 3-9 (HDC1000/1100)
HD-Pb
IC321
VF-Pb-OUT
101-19
CN-2614, 1-14 (HDC1500/1600/1550/1580/1400/1450)
MB-1060, 14-5 (HDC1000/1100)
HD-Pr
IC322
VF-Pr-OUT
101-31
CN-2614, 1-15 (HDC1500/1600/1550/1580/1400/1450)
MB-1060, 14-3 (HDC1000/1100)
IC323
BUILT-UP-Pb-OUT
101-23
MB-1059, 17-3 (HDC1500/1600/1550/1580/1400/1450)
MB-1060, NC (HDC1000/1100)
IC327
BUILT-UP-Pr-OUT
101-35
MB-1059, 17-5 (HDC1500/1600/1550/1580/1400/1450)
MB-1060, NC (HDC1000/1100)
CRANE-Pb-OUT
101-27
CN-2619, 5-2 (HDC1500/1600/1550/1580/1400/1450)
CN-2604, 3-2 (HDC1000/1100)
CRANE-Pr-OUT
101-39
CN-2619, 5-1 (HDC1500/1600/1550/1580/1400/1450)
MB-1060, 14-12 (HDC1000/1100)

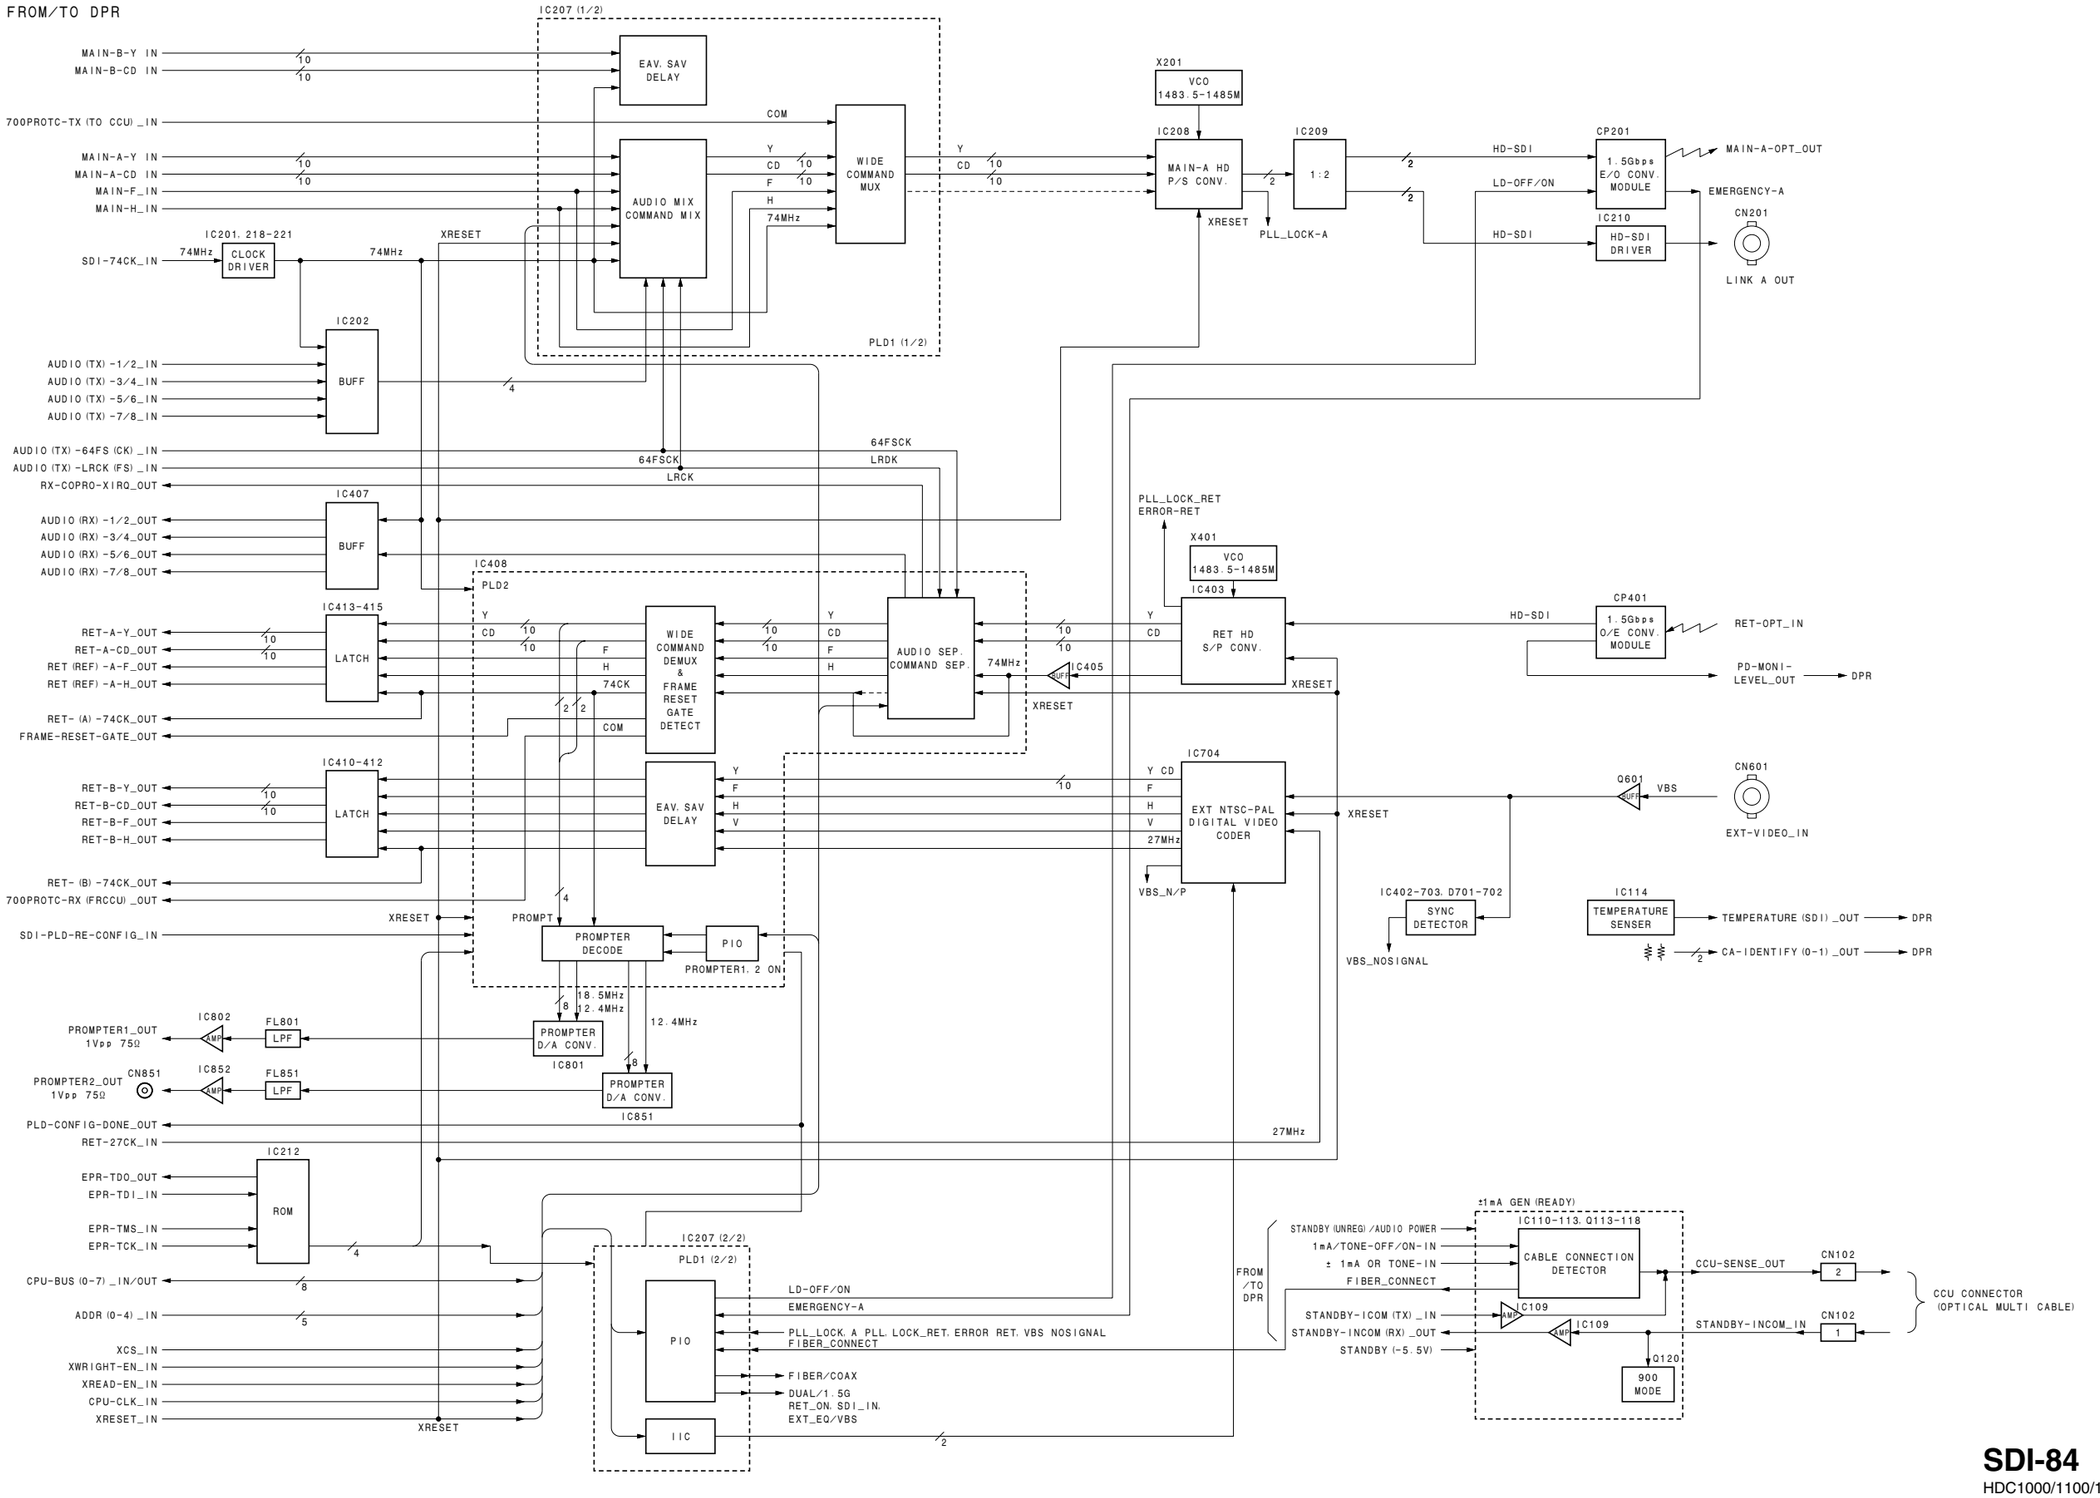VDA-63

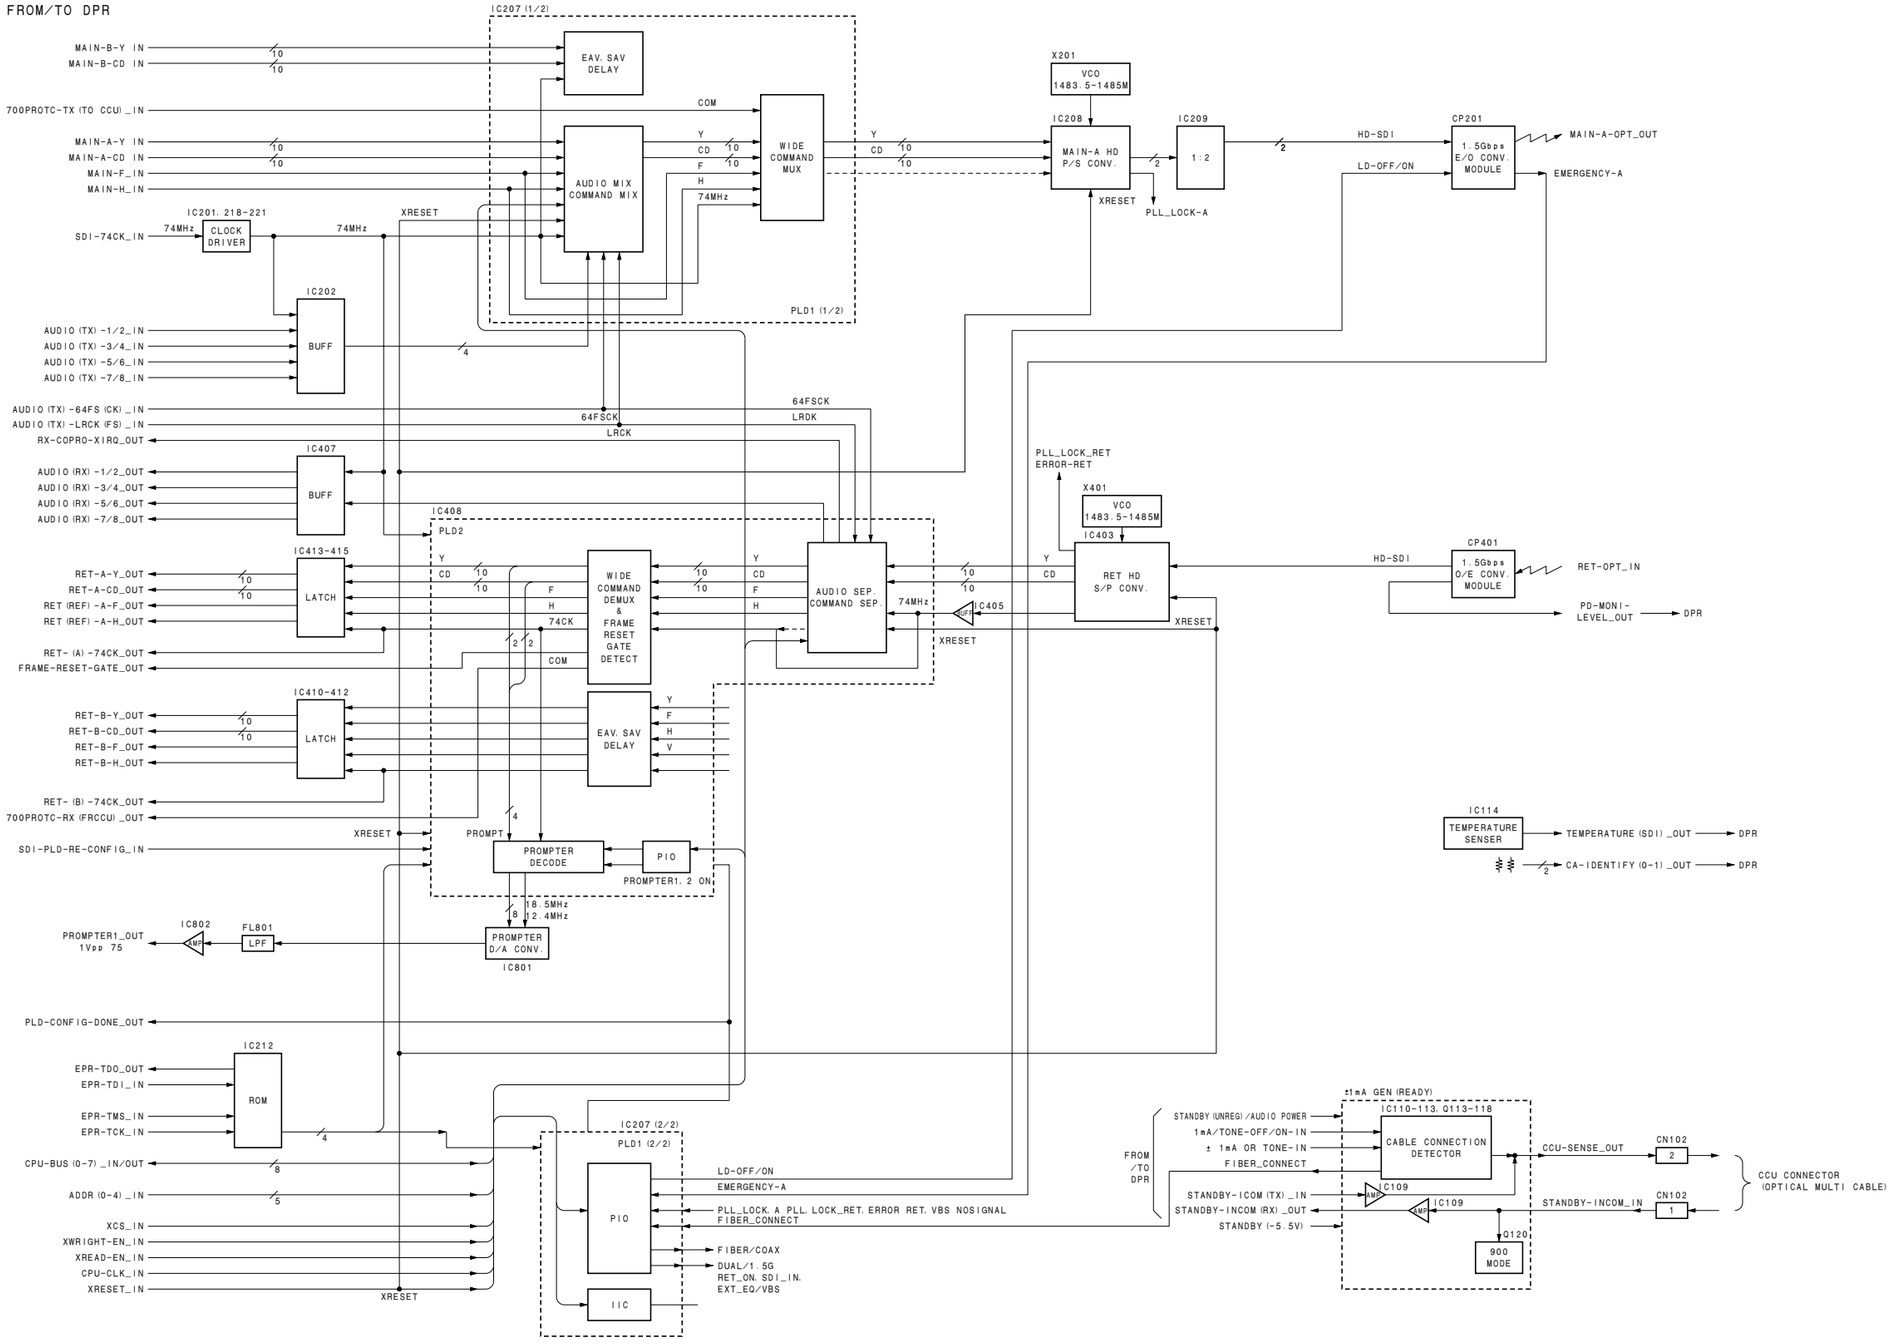


**TG-243**
HDC1000/1400/1450/1500/1550/1580

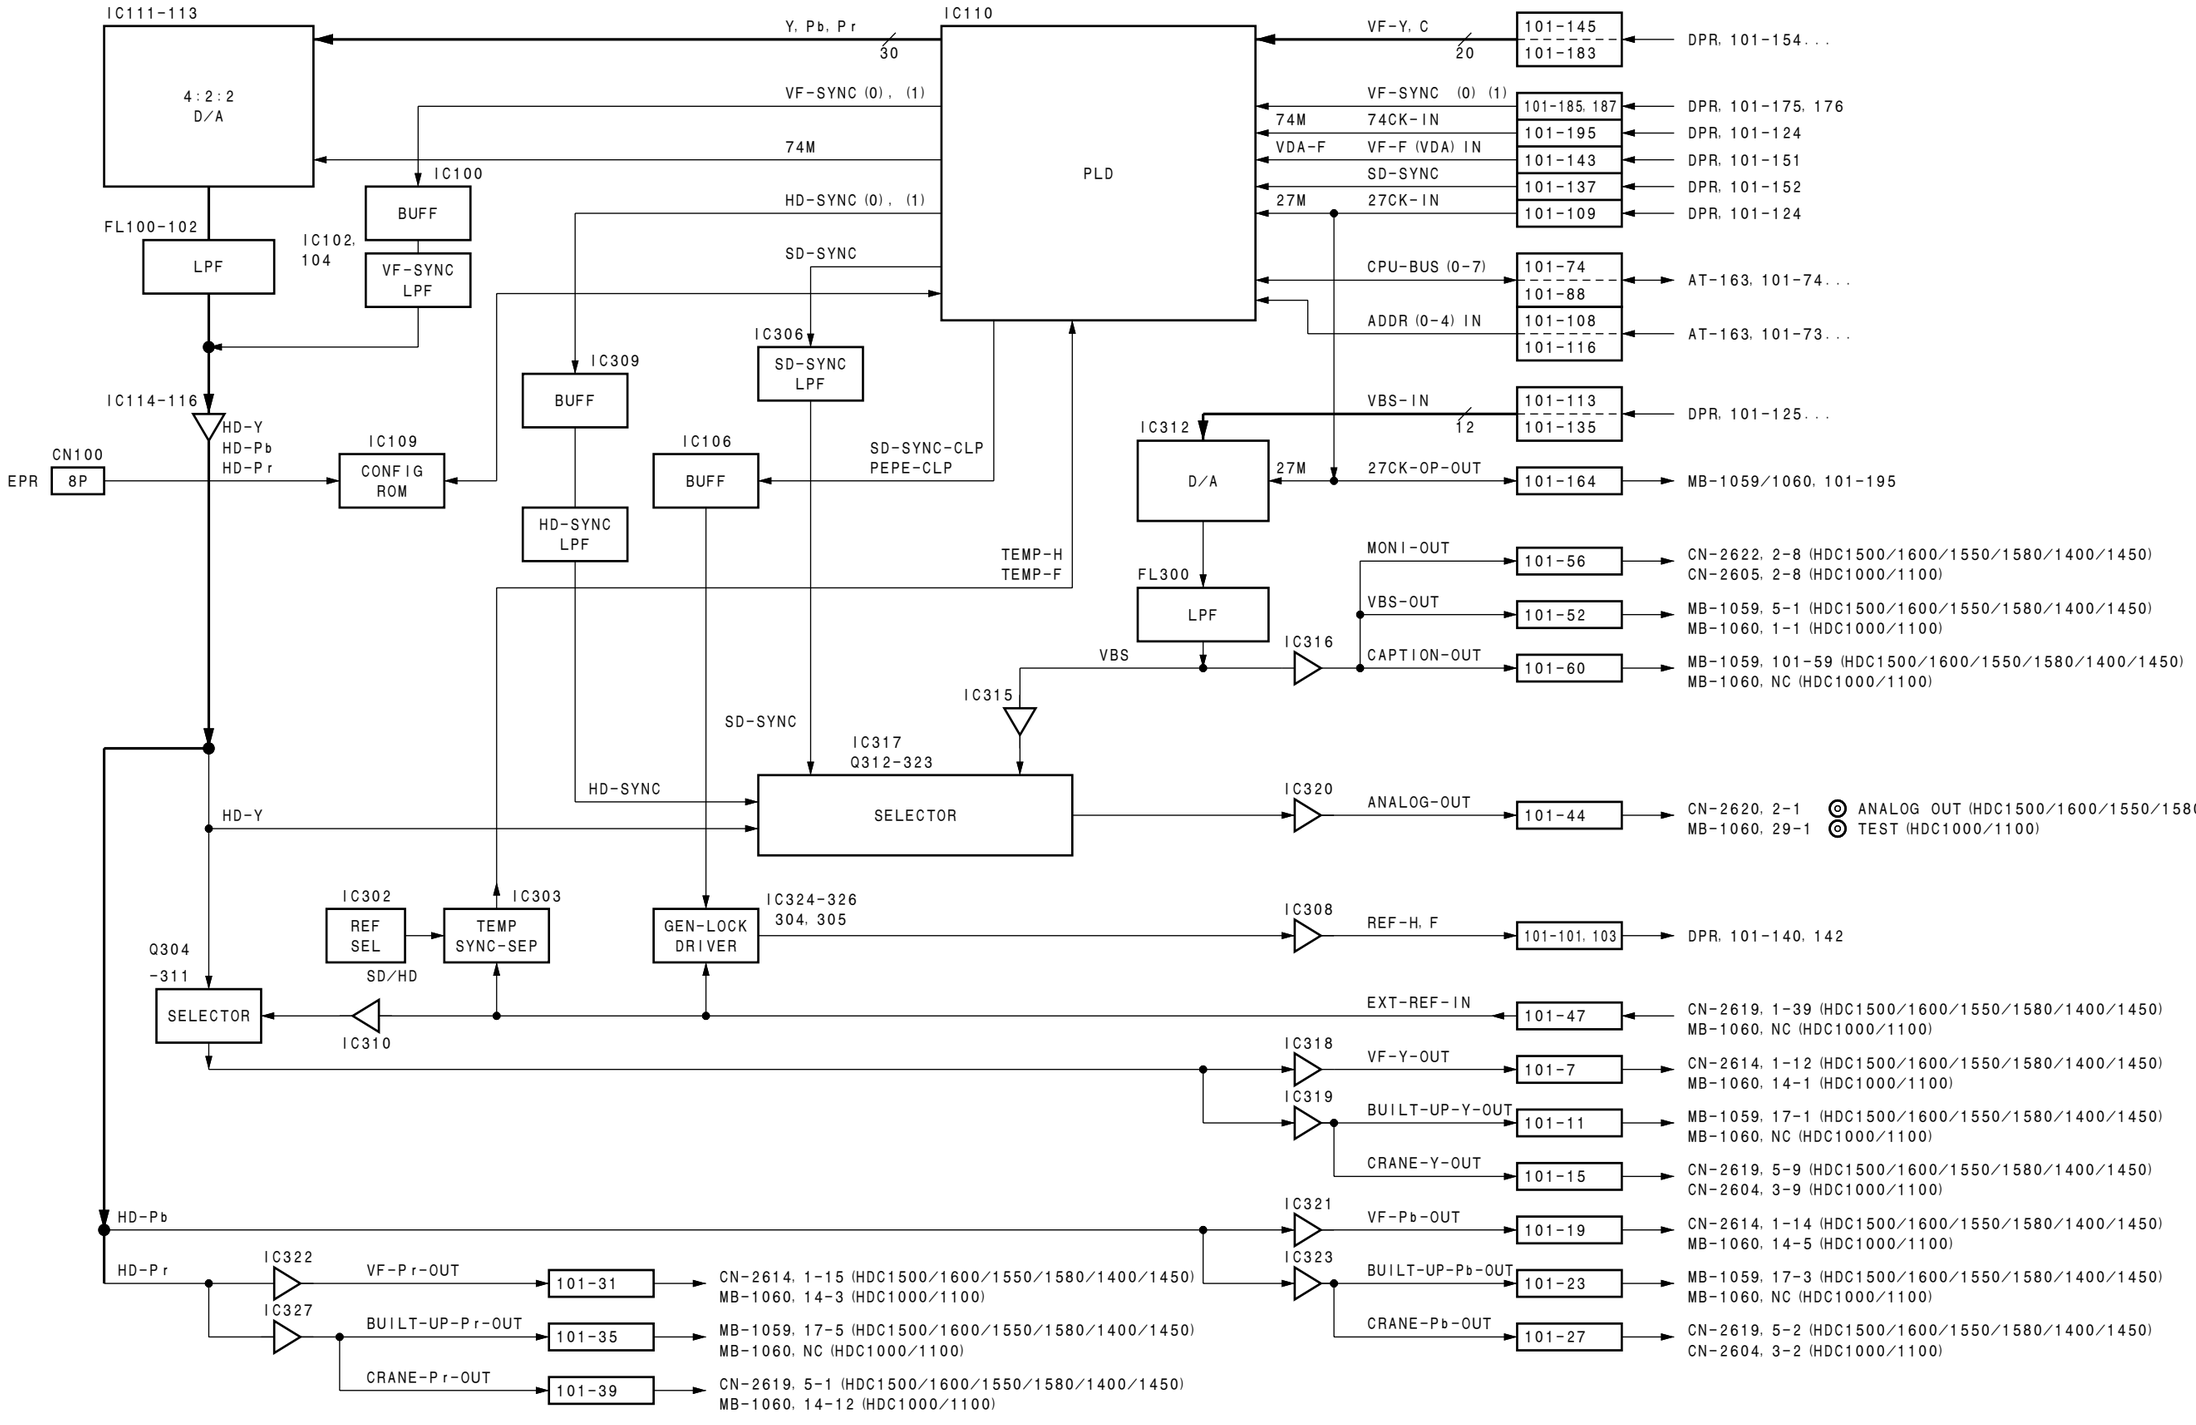


**TG-247**
HDC1100/1600

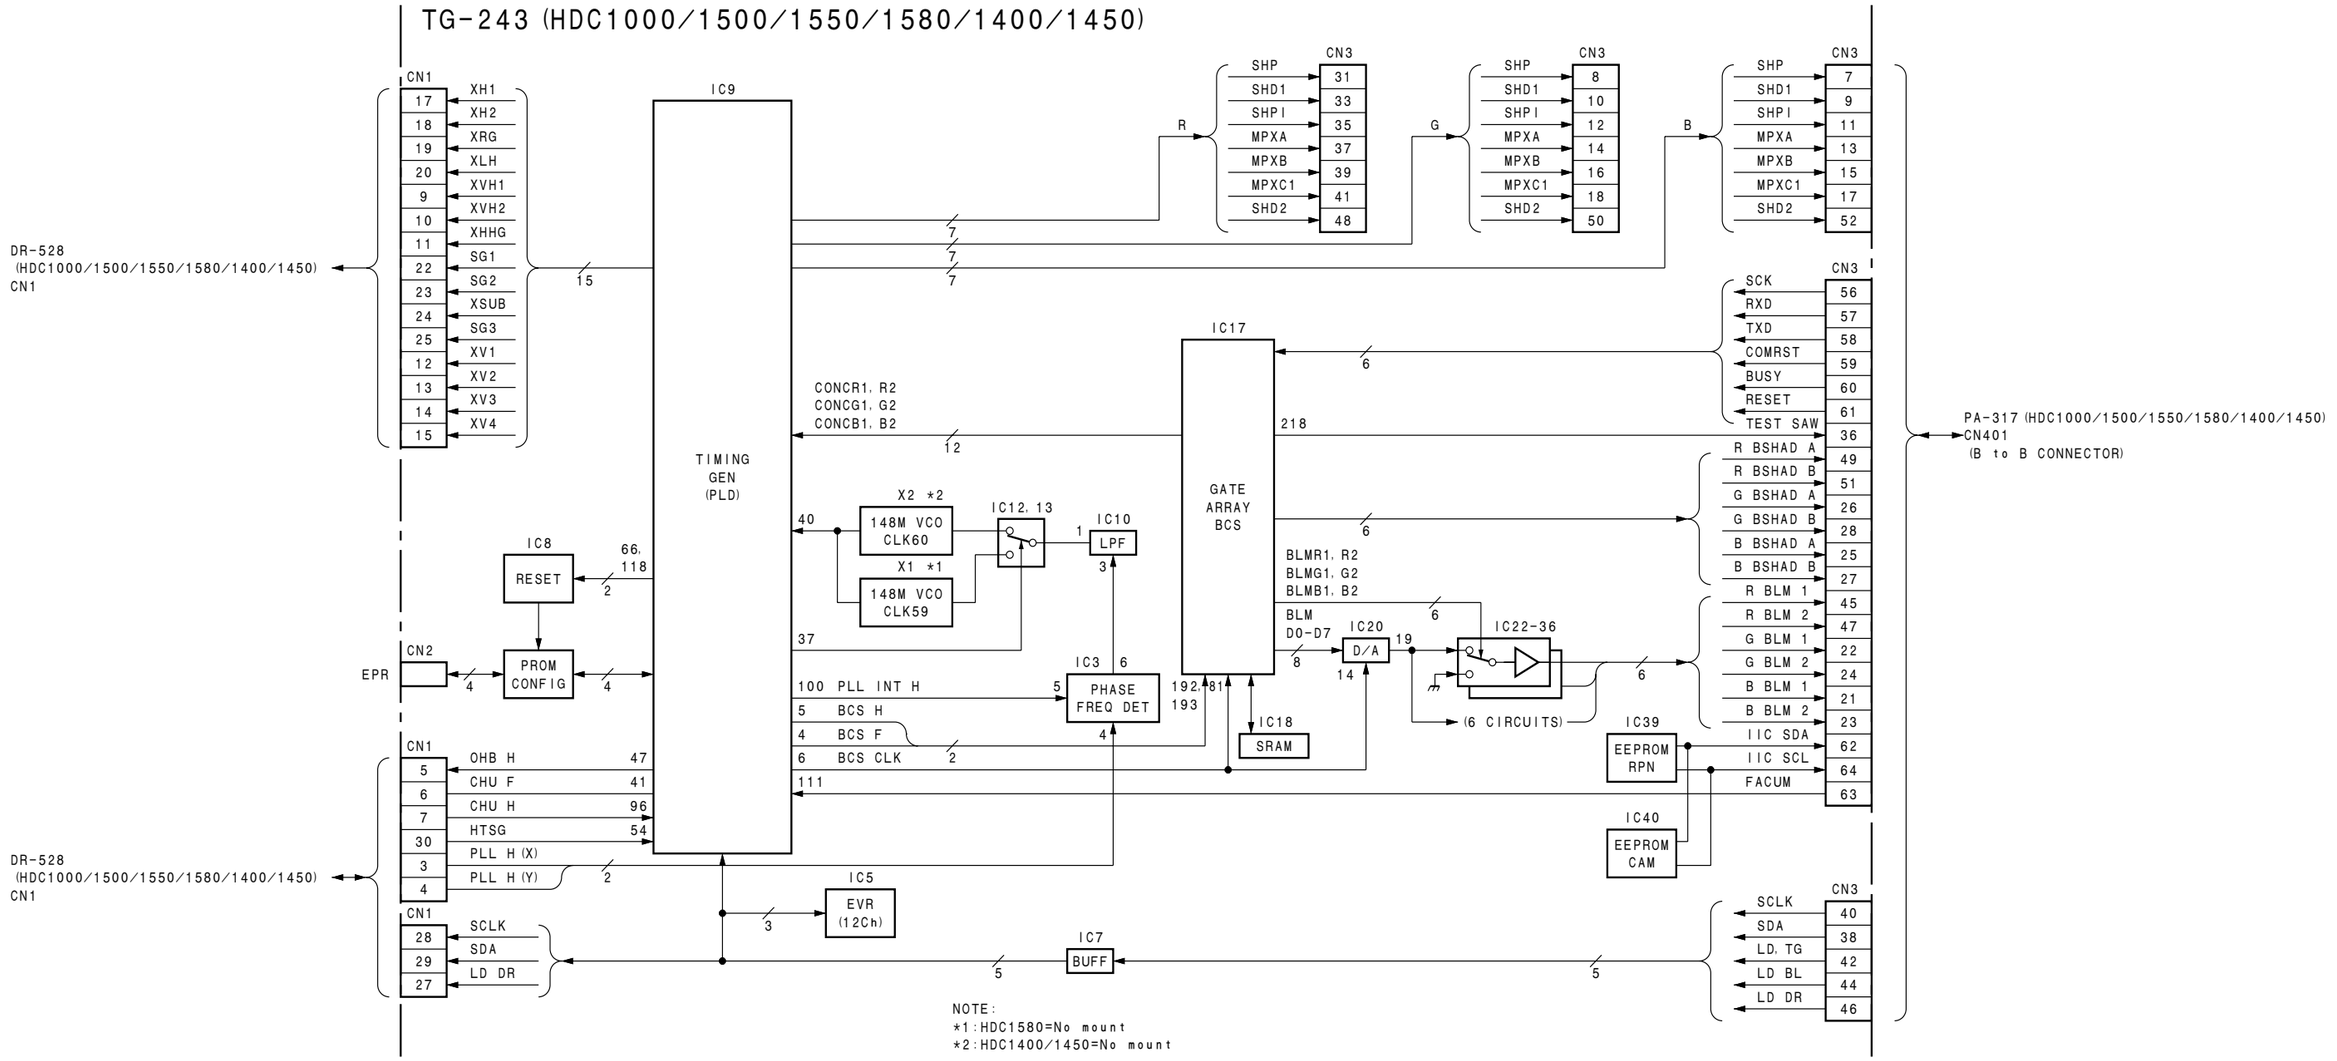


**MX-109**
HDC1450/1550

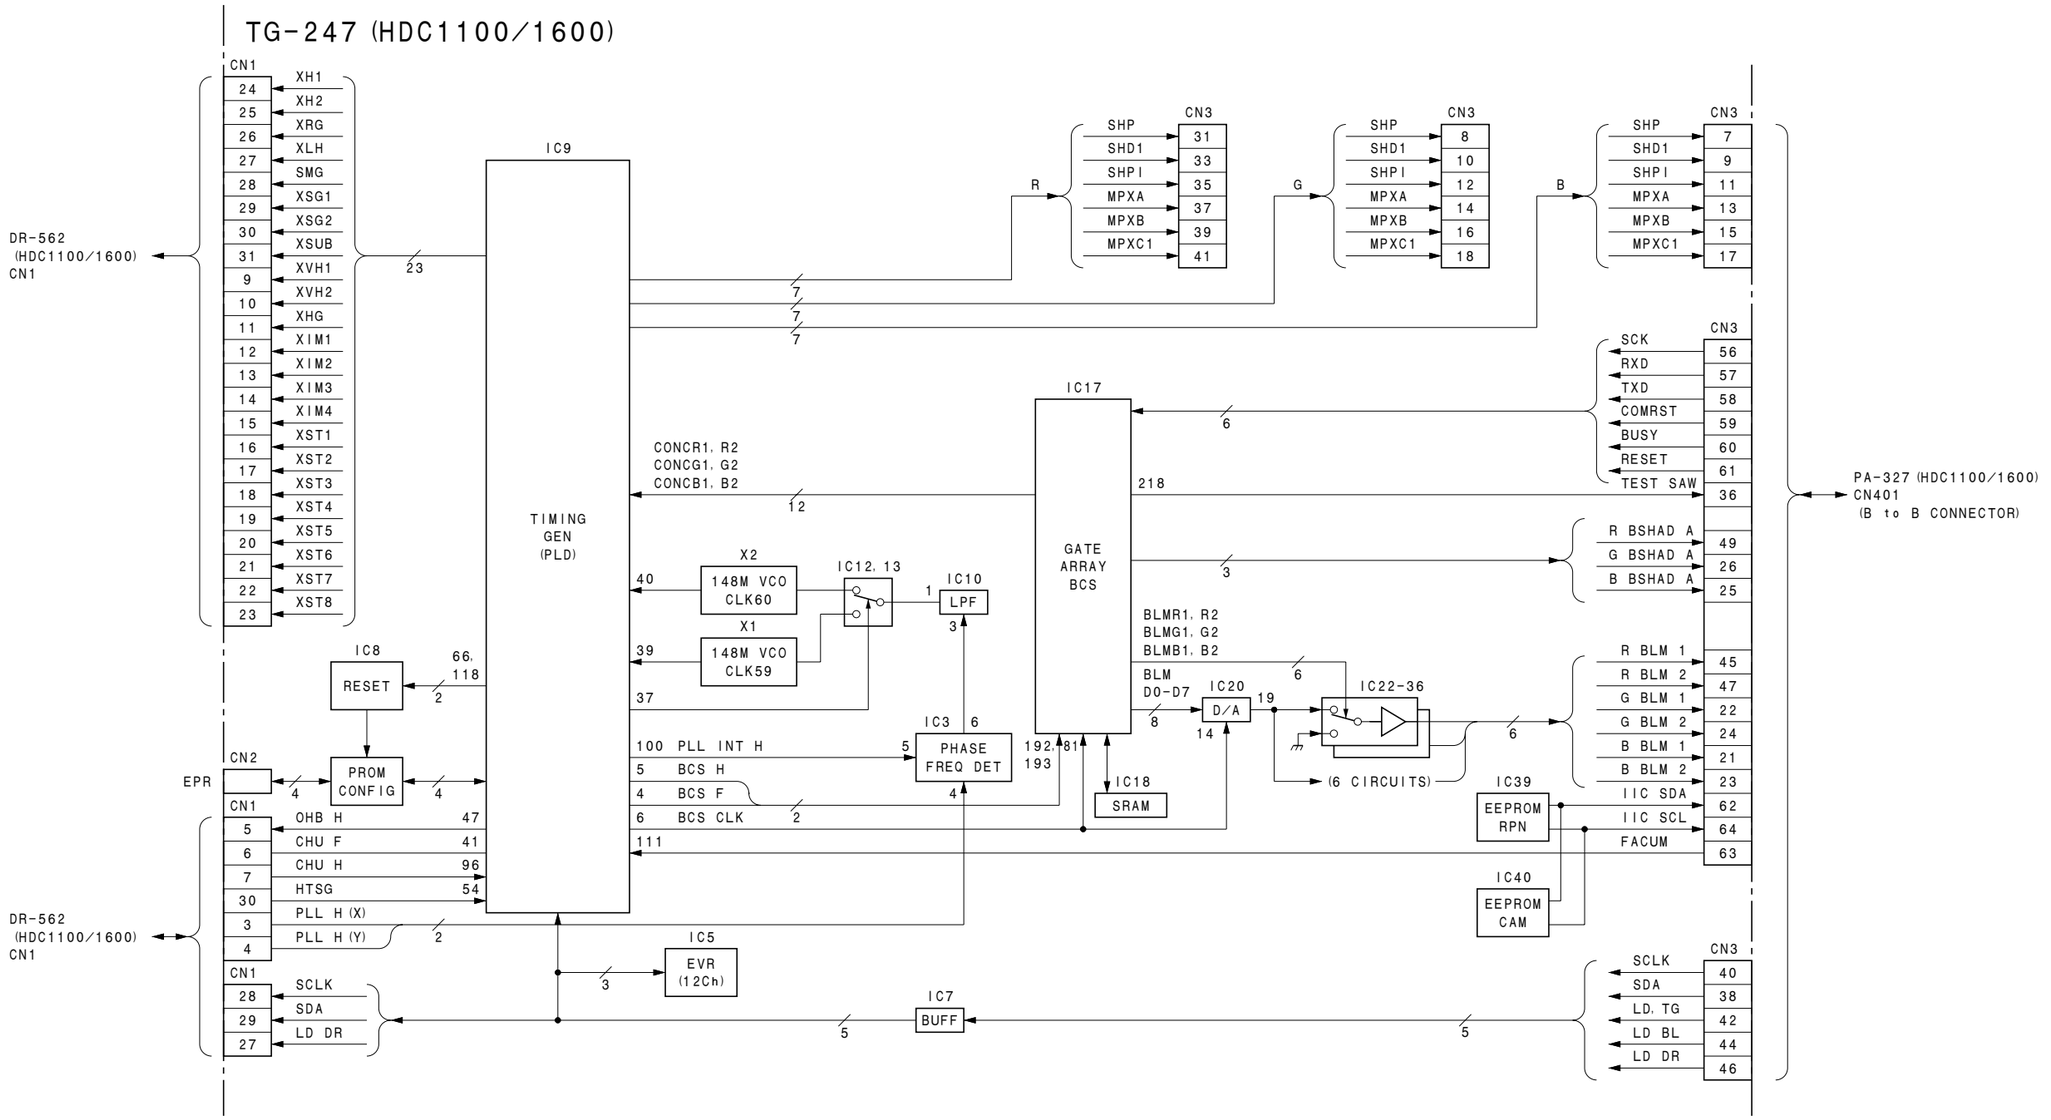


**TR-136**
HDC1450/1550

# Section 4
# Schematic Diagrams

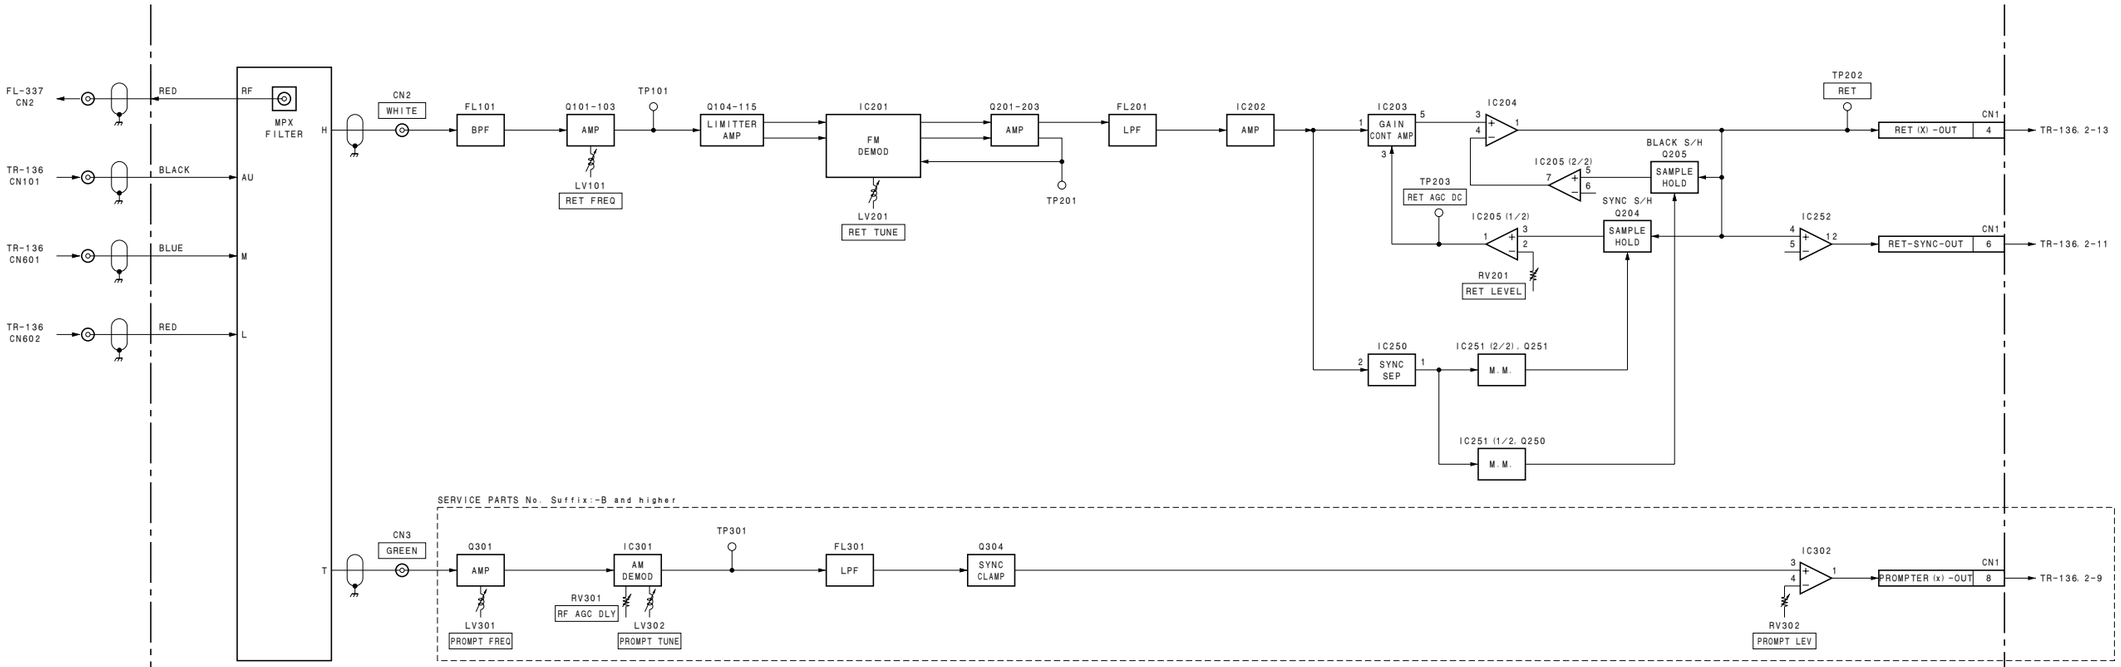
| Index | | Page |
|---|---|---|
| A. | AT-163 | 4-3 |
| | AT-166 | 4-10 |
| | AU-298 | 4-12 |
| B. | BI-175 | 4-16 |
| | BI-187 | 4-17 |
| | BI-188 | 4-18 |
| | BI-189 | 4-19 |
| C. | CN-2578 | 4-20 |
| | CN-2579 | 4-21 |
| | CN-2602 | 4-22 |
| | CN-2603/2603B | 4-22 |
| | CN-2604 | 4-23 |
| | CN-2605 | 4-23 |
| | CN-2606 | 4-24 |
| | CN-2607 | 4-24 |
| | CN-2608 | 4-24 |
| | CN-2609 | 4-25 |
| | CN-2614/2614B | 4-25 |
| | CN-2615 | 4-26 |
| | CN-2616 | 4-26 |
| | CN-2617 | 4-27 |
| | CN-2618 | 4-28 |
| | CN-2619 | 4-28 |
| | CN-2620 | 4-29 |
| | CN-2621 | 4-29 |
| | CN-2621GA | 4-29 (a) |
| | CN-2622 | 4-30 |
| | CN-2623 | 4-30 |
| | CN-2640 | 4-30 |
| | CN-2671 | 4-30 |
| | CN-2712 | 4-31 |
| | CN-2723 | 4-32 |
| D. | DAP-33 | 4-33 |
| | DPR-265 | 4-37 |
| | DPR-265C | 4-49 |
| | DR-528 | 4-62 |
| | DR-562 | 4-64 |
| F. | FL-337 | 4-67 |
| | FL-338 | 4-67 |
| | Frame Wiring (HDC1000/1100) | 4-144 |
| | Frame Wiring (HDC1500/1550/1600/1400) | 4-145 |
| | Frame Wiring (HDC1580) | 4-146 |

| Index | | Page |
|---|---|---|
| L. | LE-291 | 4-68 |
| | LE-308 | 4-70 |
| | LE-309 | 4-71 |
| M. | MB-1059 | 4-72 |
| | MB-1059/1059G/1059GA | 4-72 (a) |
| | MB-1060 | 4-74 |
| | MX-109 | 4-78 |
| P. | PA-317 | 4-83 |
| | PA-317C | 4-87 |
| | PA-327 | 4-91 |
| S. | SDI-84 | 4-95 |
| | SDI-84C | 4-103 |
| | SW-1233 | 4-110 |
| | SW-1236 | 4-112 |
| | SW-1237 | 4-112 |
| | SW-1238 | 4-113 |
| | SW-1239 | 4-113 |
| | SW-1240 | 4-113 |
| | SW-1241/1241B | 4-114 |
| | SW-1242 | 4-114 |
| | SW-1245 | 4-114 |
| | SW-1273 | 4-115 |
| T. | TG-243 | 4-116 |
| | TG-243BG | 4-120 |
| | TG-243C | 4-124 |
| | TG-247 | 4-128 |
| | TR-136 | 4-132 |
| V. | VDA-63 | 4-139 |
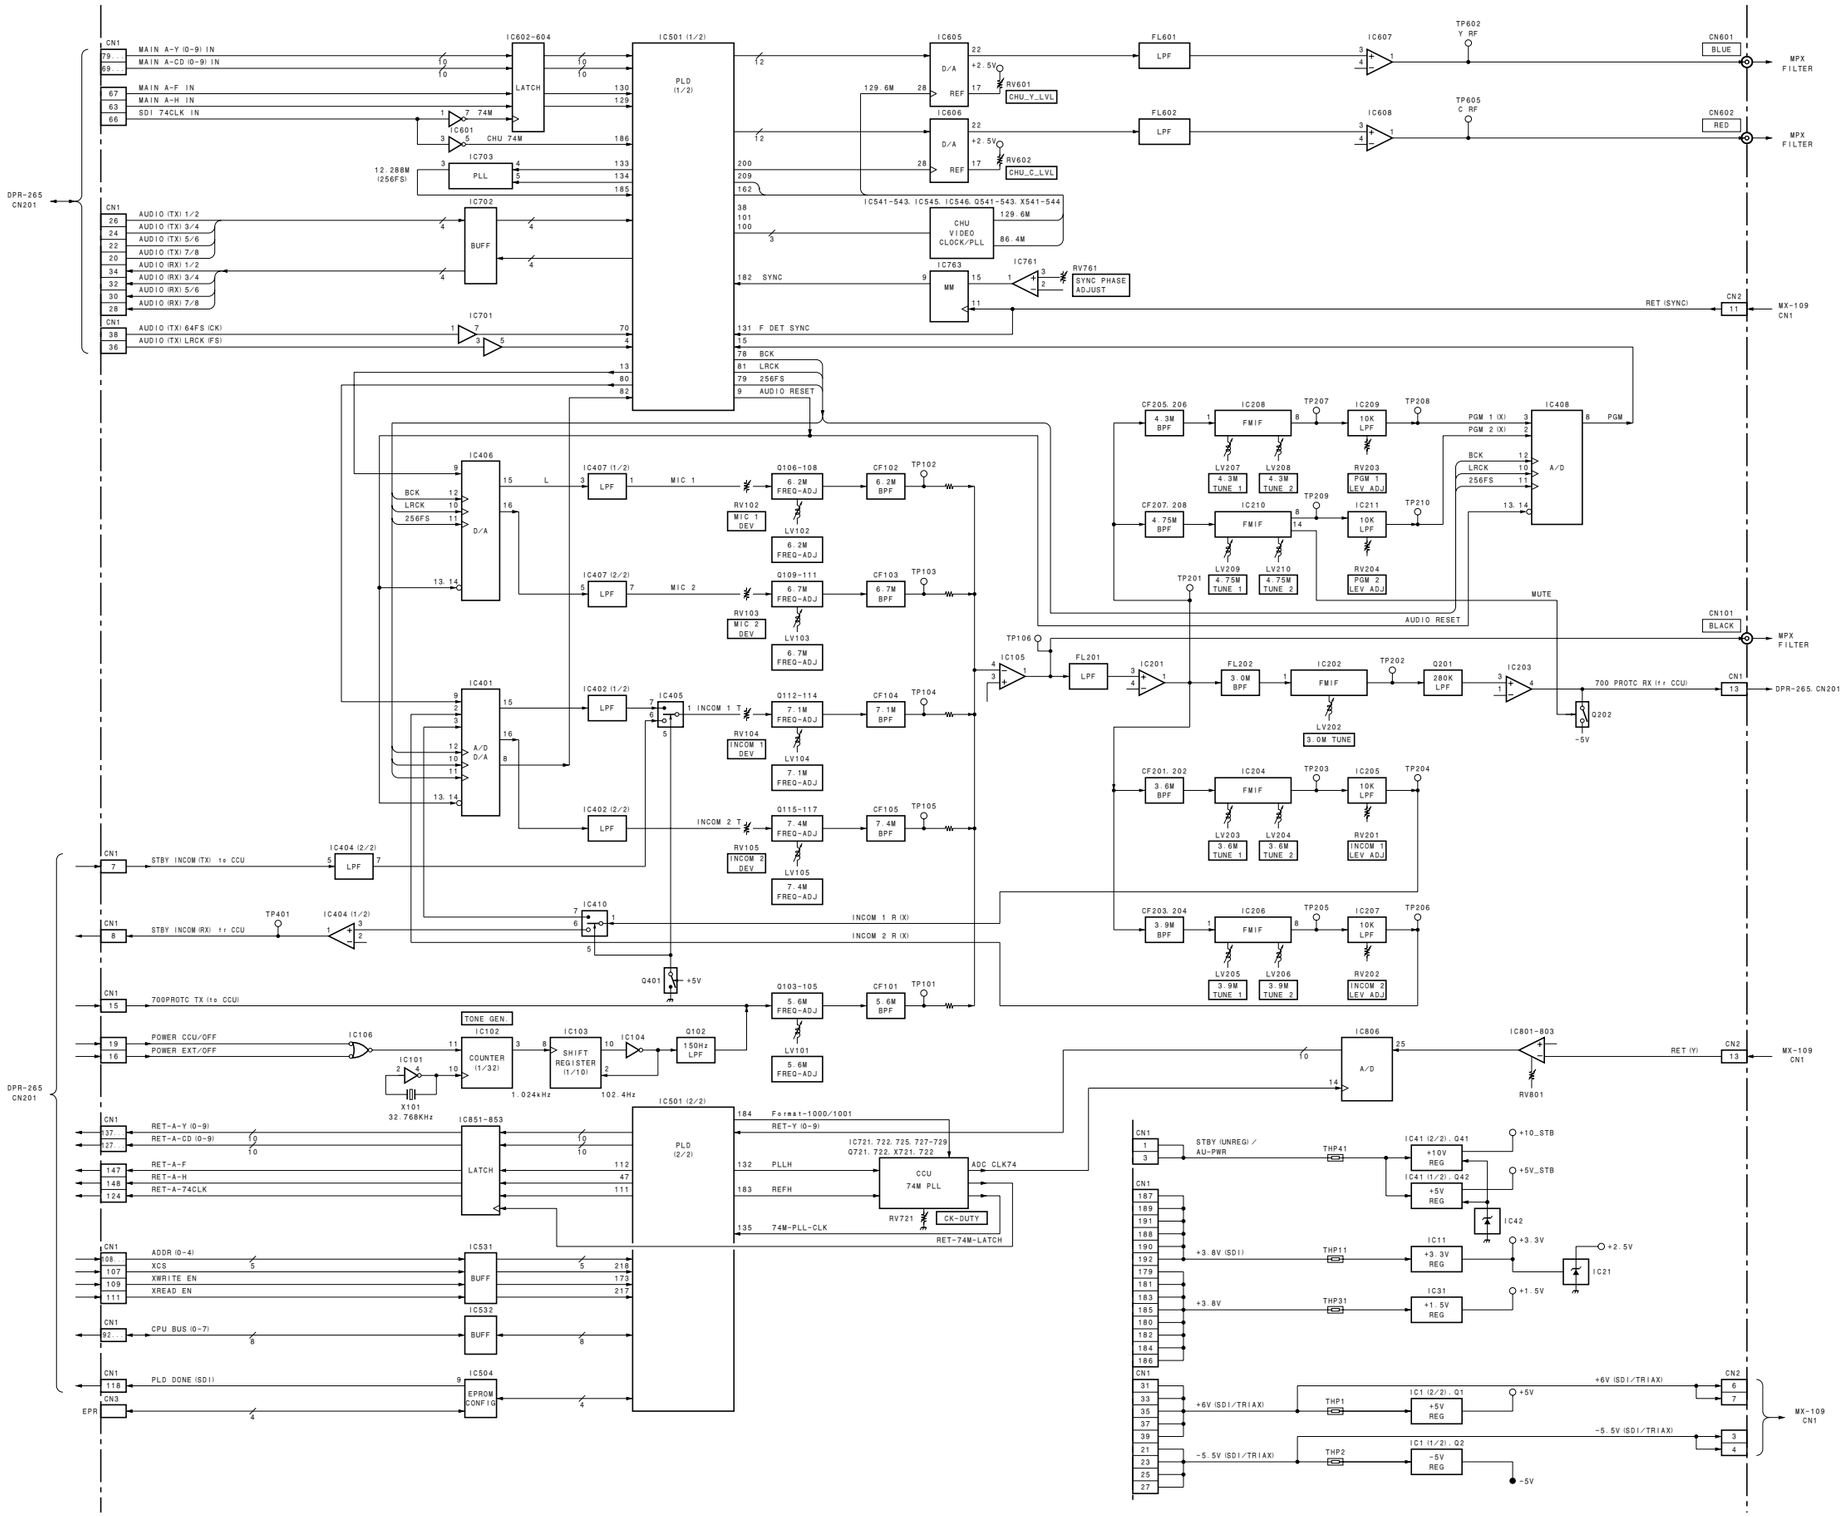
## Board List

| Board Name | HDC 1000 | HDC 1100 | HDC 1400 | HDC 1450 | HDC 1500 | HDC 1550 | HDC 1580 | HDC 1600 |
|---|---|---|---|---|---|---|---|---|
| AT-163 | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| AT-166/166G * | ○ | ○ | — | — | — | — | — | — |
| AU-298 | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| BI-175 | ○ | — | ○ | ○ | ○ | ○ | ○ | — |
| BI-187 | — | ○ | — | — | — | — | — | ○ |
| BI-188 | — | ○ | — | — | — | — | — | ○ |
| BI-189 | — | ○ | — | — | — | — | — | ○ |
| CN-2578 | ○ | — | ○ | ○ | ○ | ○ | ○ | — |
| CN-2579/2579G * | ○ | — | ○ | ○ | ○ | ○ | ○ | — |
| CN-2602 | ○ | ○ | — | — | — | — | — | — |
| CN-2603/2603B *1 | ○ | ○ | — | — | — | — | — | — |
| CN-2604 | ○ | ○ | — | — | — | — | — | — |
| CN-2605 | ○ | ○ | — | — | — | — | — | — |
| CN-2606 | ○ | ○ | — | — | — | — | — | — |
| CN-2607 | ○ | ○ | — | — | — | — | — | — |
| CN-2608 | ○ | ○ | — | — | — | — | — | — |
| CN-2609/2609G * | ○ | ○ | — | — | — | — | — | — |
| CN-2614/2614B | — | — | ○ | ○ | ○ | ○ | ○ | ○ |
| CN-2615 | — | — | ○ | ○ | ○ | ○ | ○ | ○ |
| CN-2616 | — | — | ○ | ○ | ○ | ○ | ○ | ○ |
| CN-2617 | — | — | ○ | ○ | ○ | ○ | ○ | ○ |
| CN-2618 | — | — | ○ | ○ | ○ | ○ | ○ | ○ |
| CN-2619/2619G * | — | — | ○ | ○ | ○ | ○ | ○ | ○ |
| CN-2620 | — | — | ○ | ○ | ○ | ○ | ○ | ○ |
| CN-2621/2621G * | — | — | — | — | ○ | ○ | ○ | ○ |
| CN-2621GA | — | — | ○ | ○ | ○ | ○ | ○ | ○ |
| CN-2622 | — | — | ○ | ○ | ○ | ○ | ○ | ○ |
| CN-2623 | — | — | ○ | ○ | ○ | ○ | ○ | ○ |
| CN-2640 | — | — | ○ | ○ | ○ | ○ | ○ | ○ |
| CN-2671 | ○ | ○ | — | — | — | — | — | — |
| CN-2712 | — | ○ | — | — | — | — | — | ○ |
| CN-2723/2723G * | — | ○ | — | — | — | — | — | ○ |
| DAP-33 | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| DPR-265 | ○ | ○ | ○ | ○ | ○ | ○ | — | ○ |
| DPR-265C | — | — | — | — | — | — | ○ | — |
| DR-528/528G * | ○ | — | ○ | ○ | ○ | ○ | ○ | — |
| DR-562/562G * | — | ○ | — | — | — | — | — | ○ |
| FL-337 | — | — | — | ○ | — | ○ | — | — |
| FL-338 | — | — | — | ○ | — | ○ | — | — |

| Board Name | HDC 1000 | HDC 1100 | HDC 1400 | HDC 1450 | HDC 1500 | HDC 1550 | HDC 1580 | HDC 1600 |
|---|---|---|---|---|---|---|---|---|
| LE-291 | ○ | ○ | — | — | — | — | — | — |
| LE-308 | — | — | ○ | ○ | ○ | ○ | ○ | ○ |
| LE-309 | ○ | ○ | — | — | — | — | — | — |
| MB-1059/1059G * | — | — | — | — | ○ | ○ | ○ | ○ |
| MB-1059GA | — | — | ○ | ○ | ○ | ○ | ○ | ○ |
| MB-1060/1060G * | ○ | ○ | — | — | — | — | — | — |
| MX-109 | — | — | — | ○ | — | ○ | — | — |
| PA-317/317G * | ○ | — | ○ | ○ | ○ | ○ | — | — |
| PA-317CG | — | — | — | — | — | — | ○ | — |
| PA-327/327G * | — | ○ | — | — | — | — | — | ○ |
| SDI-84 | ○ | ○ | — | — | ○ | — | — | ○ |
| SDI-84C | — | — | ○ | — | — | — | ○ | — |
| SW-1233/1233G * | ○ | ○ | — | — | — | — | — | — |
| SW-1236 | — | — | ○ | ○ | ○ | ○ | ○ | ○ |
| SW-1237 | — | — | ○ | ○ | ○ | ○ | ○ | ○ |
| SW-1238 | — | — | ○ | ○ | ○ | ○ | ○ | ○ |
| SW-1239 | — | — | ○ | ○ | ○ | ○ | ○ | ○ |
| SW-1240 | — | — | ○ | ○ | ○ | ○ | ○ | ○ |
| SW-1241/1241B *2 | — | — | ○ | ○ | ○ | ○ | ○ | ○ |
| SW-1242 | — | — | ○ | ○ | ○ | ○ | ○ | ○ |
| SW-1245 | — | — | ○ | ○ | ○ | ○ | ○ | ○ |
| SW-1273/1273G * | — | — | ○ | ○ | ○ | ○ | ○ | ○ |
| TG-243/243G * | ○ | — | ○ | ○ | ○ | ○ | — | — |
| TG-243BG | — | — | ○ | — | — | — | — | — |
| TG-243CG | — | — | — | — | — | — | ○ | — |
| TG-247/247G * | — | ○ | — | — | — | — | — | ○ |
| TR-136 | — | — | — | ○ | — | ○ | — | — |
| VDA-63 | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |

*1: CN−2603Bは HDC1000(CE)専用です。
*2: SW−1241Bは HDC1400(CE)/1450(CE)/1500(CE)/1550(CE) および HDC1580(CN)用です。
*1: CN-3603B is used only for HDC1000(CE).
*2: SW-1241B is used for HDC1400(CE)/1450(CE)/1500(CE)/1550(CE) and HDC1580(CN).

**注意**

＊印の基板は２種類ありますが，マニュアル内の記載では簡素化するため基板名に “G” を付けていません。

**Note**

The board with an asterisk (*) has two types. However, the board name in the manual does not have “G” at the end for simplification.


4-2

# AT-163 (1/4)

**SUFFIX: -12, 13**

AT-163 (1/4)
SUFFIX: -12, 13







AT-163_CN (1-794-309-11)

# AT-163 (1/4)

BOARD NO. 1-865-934-12, 13

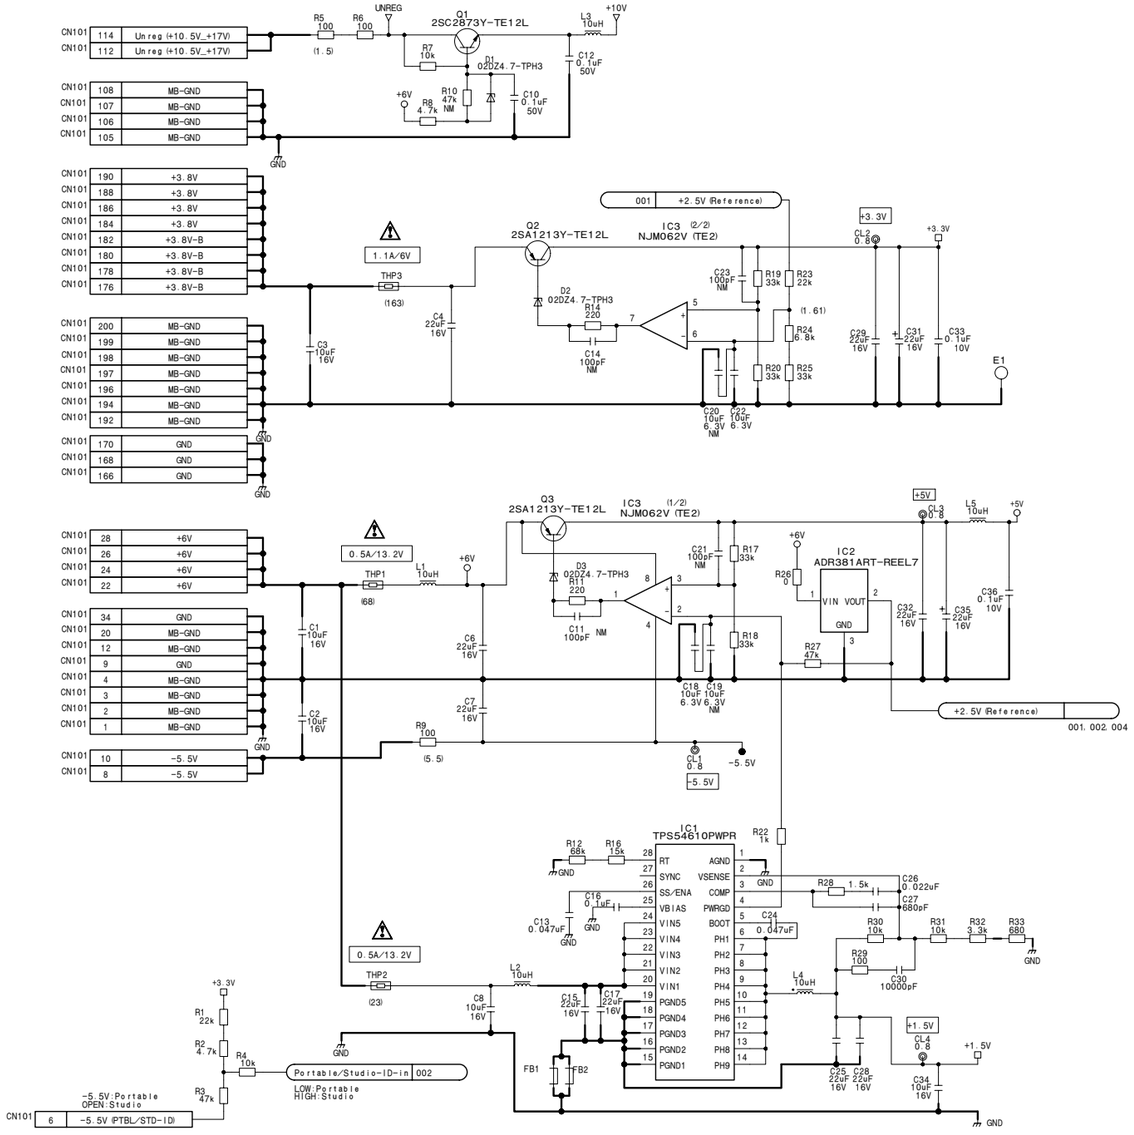HDC-1500_AT-163_012_1
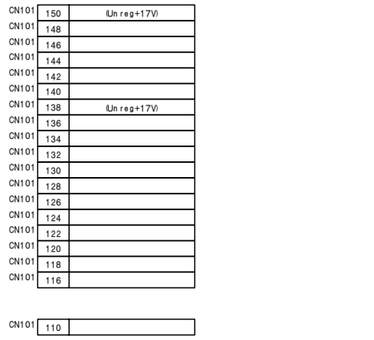
# AT-163 (2/4)
SUFFIX: -12, 13

AT-163 (2/4)
SUFFIX: -12, 13



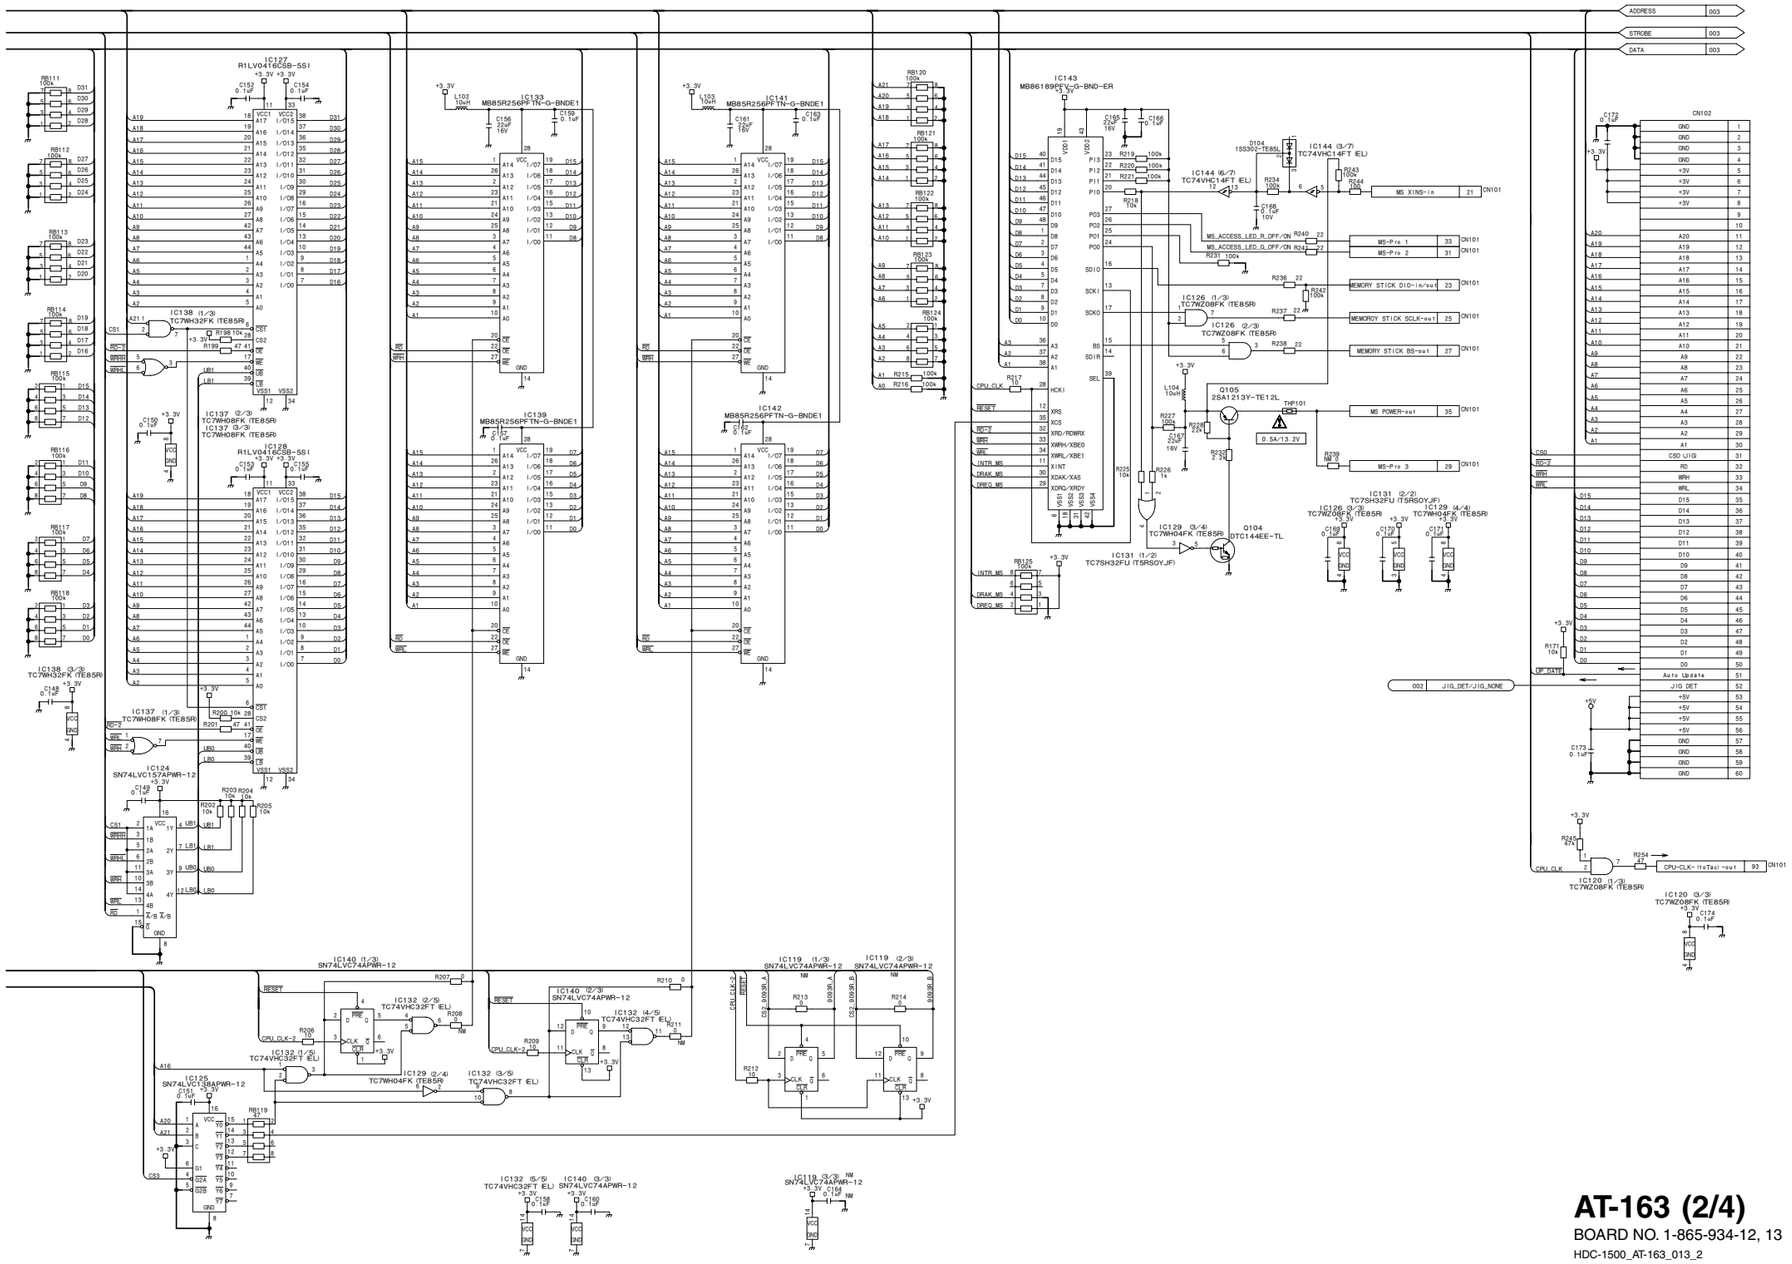


## AT-163 (2/4)

BOARD NO. 1-865-934-12, 13

HDC-1500_AT-163_013_2

**AT-163 (3/4)**
**SUFFIX: -12, 13**

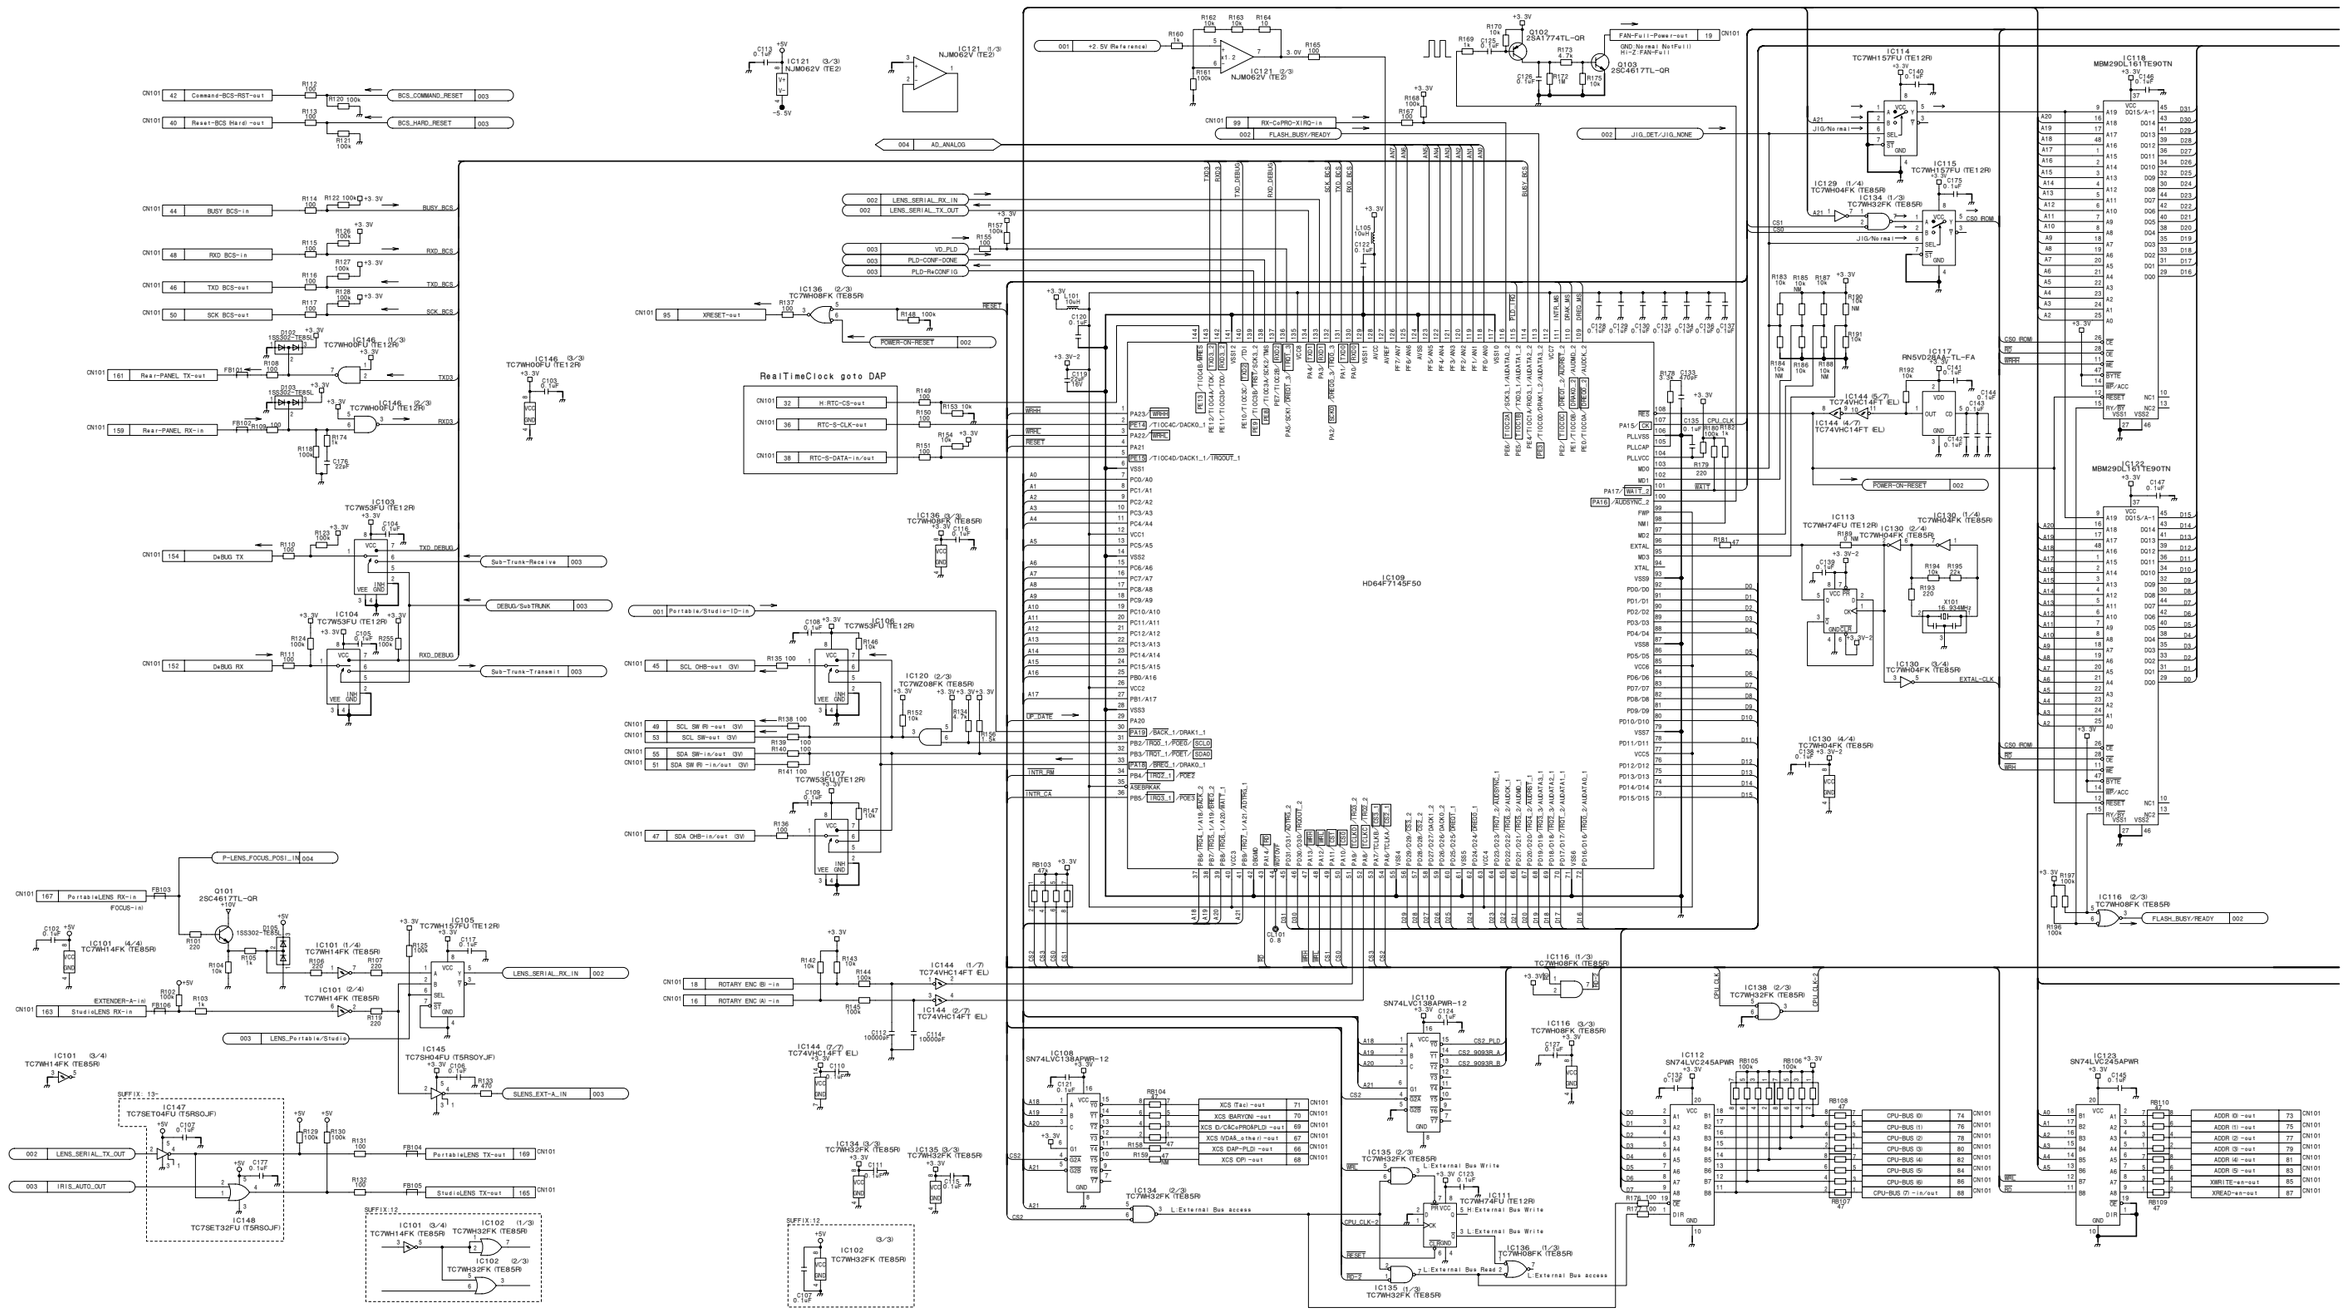



4-6


P/S&P10
EPR
IC404 EP16P2S6C6N
IC406 (5/5) TC74VHCT125AFT (EL)
IC407 (3/3) TC7WH08FK (TE85R)
IC406 (2/5) TC74VHCT125AFT (EL)
IC406 (1/5) TC74VHCT125AFT (EL)
IC407 (1/3) TC7WH08FK (TE85R)
IC406 (3/5) TC74VHCT125AFT (EL)
IC406 (4/5) TC74VHCT125AFT (EL)
IC407 (2/3) TC7WH08FK (TE85R)
IC408 (1/9) TC74VHCT244AFT (EL)
IC408 (6/9) TC74VHCT244AFT (EL)
IC408 (5/9) TC74VHCT244AFT (EL)
IC408 (3/9) TC74VHCT244AFT (EL)
IC408 (7/9) TC74VHCT244AFT (EL)
IC408 (9/9) TC74VHCT244AFT (EL)
IC403 EPC2LC20-TP
IC401 RN5VD08A-TL-FA
IC402 TC7SH08FU(TE85RSOYJF)
IC410 TC7SET04FU (TSRSOJF)
Q401 2SA1774TL-QR
Q402 DTC144EE-TL
Q403 DTA144EE-TL
Q404 DTC144EE-TL
Q405 DTC144EE-TL
Q406 DTC144EE-TL
Q407 DTC144EE-TL
Q408 DTA144EE-TL
Q409 DTA144EE-TL
Q410 DTA144EE-TL
Q411 DTA144EE-TL
Q412 DTA144EE-TL
Q413 DTA144EE-TL
Q414 DTA144EE-TL
Q415 DTA144EE-TL
Q418 DTA144EE-TL
BCS_COMMAND_RESET
BCS_HARD_RESET
H/Command_RESET
Receive_Data_B
Analog_SEL_A
Chara-IC CLK-out
XCHG-RESET-out
FAN Front-CTRL-Pulse
PLD-CONF-DONE
PLD-ReConfig
Board-ID3
Board-ID2
Board-ID1
Board-ID0
Tally ON _LENS-out
Tally ON _VF-out
Tally ON _Tracker-out
Tally ON _CA-out
Tally OFF _LENS-out
Tally OFF _VF-out
Tally OFF _Tracker-out
Tally OFF _CA-out
MAIN-V Ir. DPR -in
MAIN-H Ir. DPR -in
VF POWER OFF-out
FAN Rear1 -Detect-in
FAN Front1 -Detect-in
FAN Rear1 -CTRL-Pulse
FAN Front1 -CTRL-Pulse
FAN Rear1 -ON-out
FAN Front1 -ON-out
Audio Mute ON/OFF-out
PLD-ReConfig (VDA) -out
PLD-Done (VDA) -in
PLD-ReConfig (DAP) -out
Tally ON _CA-out
PWR-SW-CCU-EXT
LENS_Portable/Studio
FAN Rear1 -ON-out
SLENS_EXT-A_IN
Receive_Data_A
422_SEL-SubTrunk/STD
DEBUG/SubTRUNK
12bit_DA_Serial_LD
12bit_DA_Serial_Data
12bit_DA_Serial_CLK
IRIS_AUTO_OUT
CA-PANEL-RESET-out
Tally ON _VF-out
Tally ON _Tracker-out
Tally OFF _Tracker-out
Bkit_DA_Serial_LD
RCP_atc Power-NG-in
CA-sense-in Ir. PD
MAIN-V Ir. DPR -in
MAIN-H Ir. DPR -in
Board-100
Crane-HIRA-PIN
Chara-IC TX-out
FAN Front1 -ON-out
Analog_SEL_B
3WIRE serial SDATA-out
VD_PLD
POWER-SW_XEXT-in
PWR-SW-CCU-EXT
PLD-ReCONFIG
x_D4
o_Serial-LD-VDA
i_SW4
i_SW1
o_CMD-RESET
i_CS (PLD)
PLD_Reserve
o_Analog_SEL_A
o_TLY (R) -Lens
o_TLY (R) -VF
i_Reset
o_Chara-CLK
o_OHB-Reset
o_OHB-S-LD (DR)
o_OHB-S-Clock
i_CPU-CLK
i_17M-Clock
o_TLY (G) -CA
i_A6
i_A2
o_F ront-FAN-CTRL
o_PLD-ReConf (OP)
o_PLD-ReConf (DAP)
i_PLD-Done (VDA)
o_MUTE-ON/OFF
x_D7
i_VD
o_Crane-Data
o_OHB-S-LD BU
i_A5
i_A3
i_A1
i_PLD-Done (OP)
i_PLD-Done (DAP)
o_12DA-LD
o_PLD-ReConf (VDA)
i_PWR-SW-CCU/EXT
i_IRIS
x_D6
x_D1
x_D2
o_IIC_VF_SCL
o_Rear-FAN-CTRL
o_CA-RESET
i_SW3
i_PWR-NG
o_IIC_VF_SDA
o_PLD_IRQ
o_IRIS-AUTO
o_12DA_SCLK
i_Board-ID2
i_Board-ID3
i_A7
config
o_OHB-S-LD (PA)
o_BCS_CMD_RESET
o_TLY (G) -Tracker
o_TLY (R) -CA
o_TLY (R) -Back
o_TLY (G) -Back
o_VF-PWR-OFF
o_8DA-LD
i_Receive_Data (B)
i_FAN (rear) -DET
o_Serial-LD-AU
o_IIC_EXT_VF_SCL
x_D0
o_Lens_Serial/Parallel
o_12DA-SDATA
i_Board-ID1
i_A0
i_A4
o_OHB-S-Data
o_IIC-EXT-VF-SDA
i_Studio/Lens_EXT-A
o_TLY (G) -VF
o_Depair/SubTrunk
o_Lens_SEL_B
i_WRL
i_FAN (Front) -ON
o_IIC_VF_SDA
o_IIC-EXT-VF-SDA
i_CA-Sense
o_VD_PLD
i_A3
i_A1
i_PLD-Done (OP)
i_PLD-Done (DAP)
o_12DA-LD
o_PLD-ReConf (VDA)
i_PWR-SW-CCU/EXT
i_IRIS
x_D6
x_D1
x_D2
o_IIC_VF_SCL
o_Rear-FAN-CTRL
o_CA-RESET
i_SW3
i_PWR-NG
o_IIC_VF_SDA
o_PLD_IRQ
o_IRIS-AUTO
o_12DA_SCLK
i_Board-ID2
i_Board-ID3
i_A7
config
o_OHB-S-LD (PA)
o_BCS_CMD_RESET
o_TLY (G) -Tracker
o_TLY (R) -CA
o_TLY (R) -Back
o_TLY (G) -Back
o_VF-PWR-OFF
o_8DA-LD
i_Receive_Data (B)
i_FAN (rear) -DET
o_Serial-LD-AU
o_IIC_EXT_VF_SCL
x_D0
o_Lens_Serial/Parallel
o_12DA-SDATA
i_Board-ID1
i_A0
i_A4
o_OHB-S-Data
o_OHB-S-LD (TG)
i_Board-ID0
i_A6
i_A2
o_F ront-FAN-CTRL
o_PLD-ReConf (OP)
o_PLD-ReConf (DAP)
i_PLD-Done (VDA)
o_MUTE-ON/OFF
x_D7
i_VD
o_Crane-Data
o_OHB-S-LD BU
i_A5

**AT-163 (4/4)**
**SUFFIX: -12, 13**

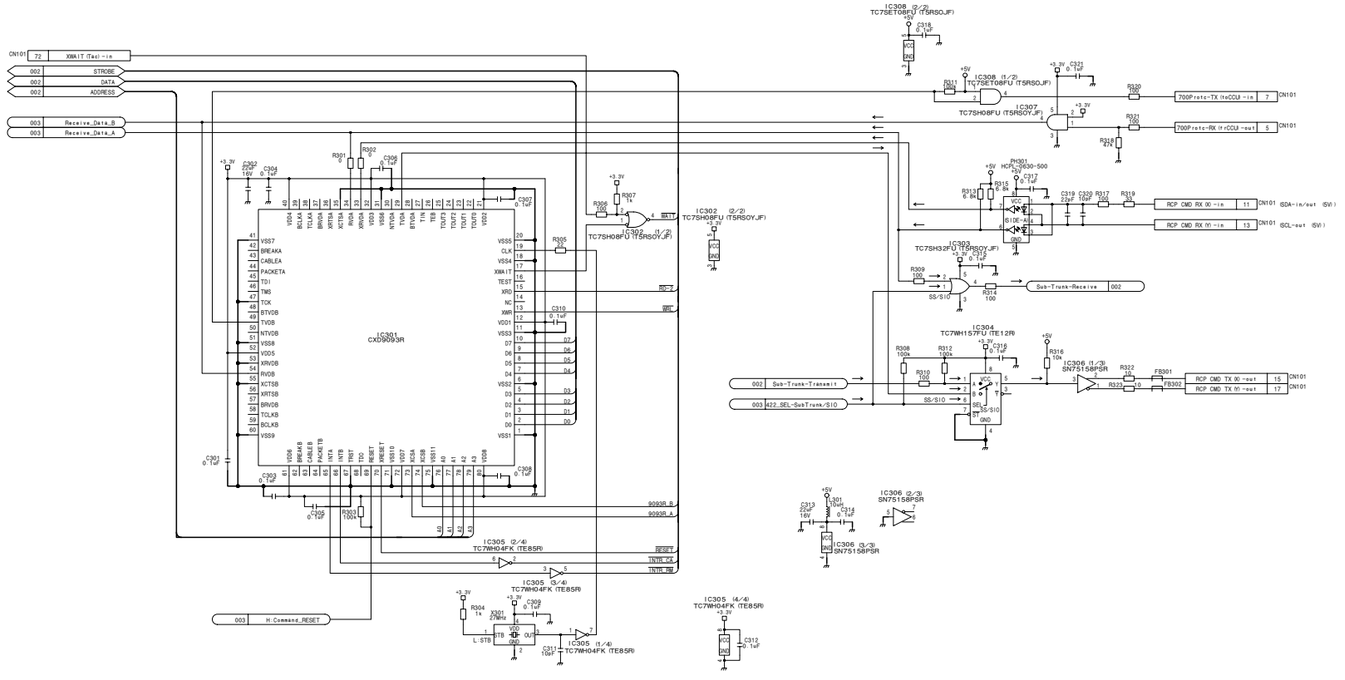


**AT-163 (4/4)**
BOARD NO. 1-865-934-12, 13
HDC-1500_AT-163_012_4




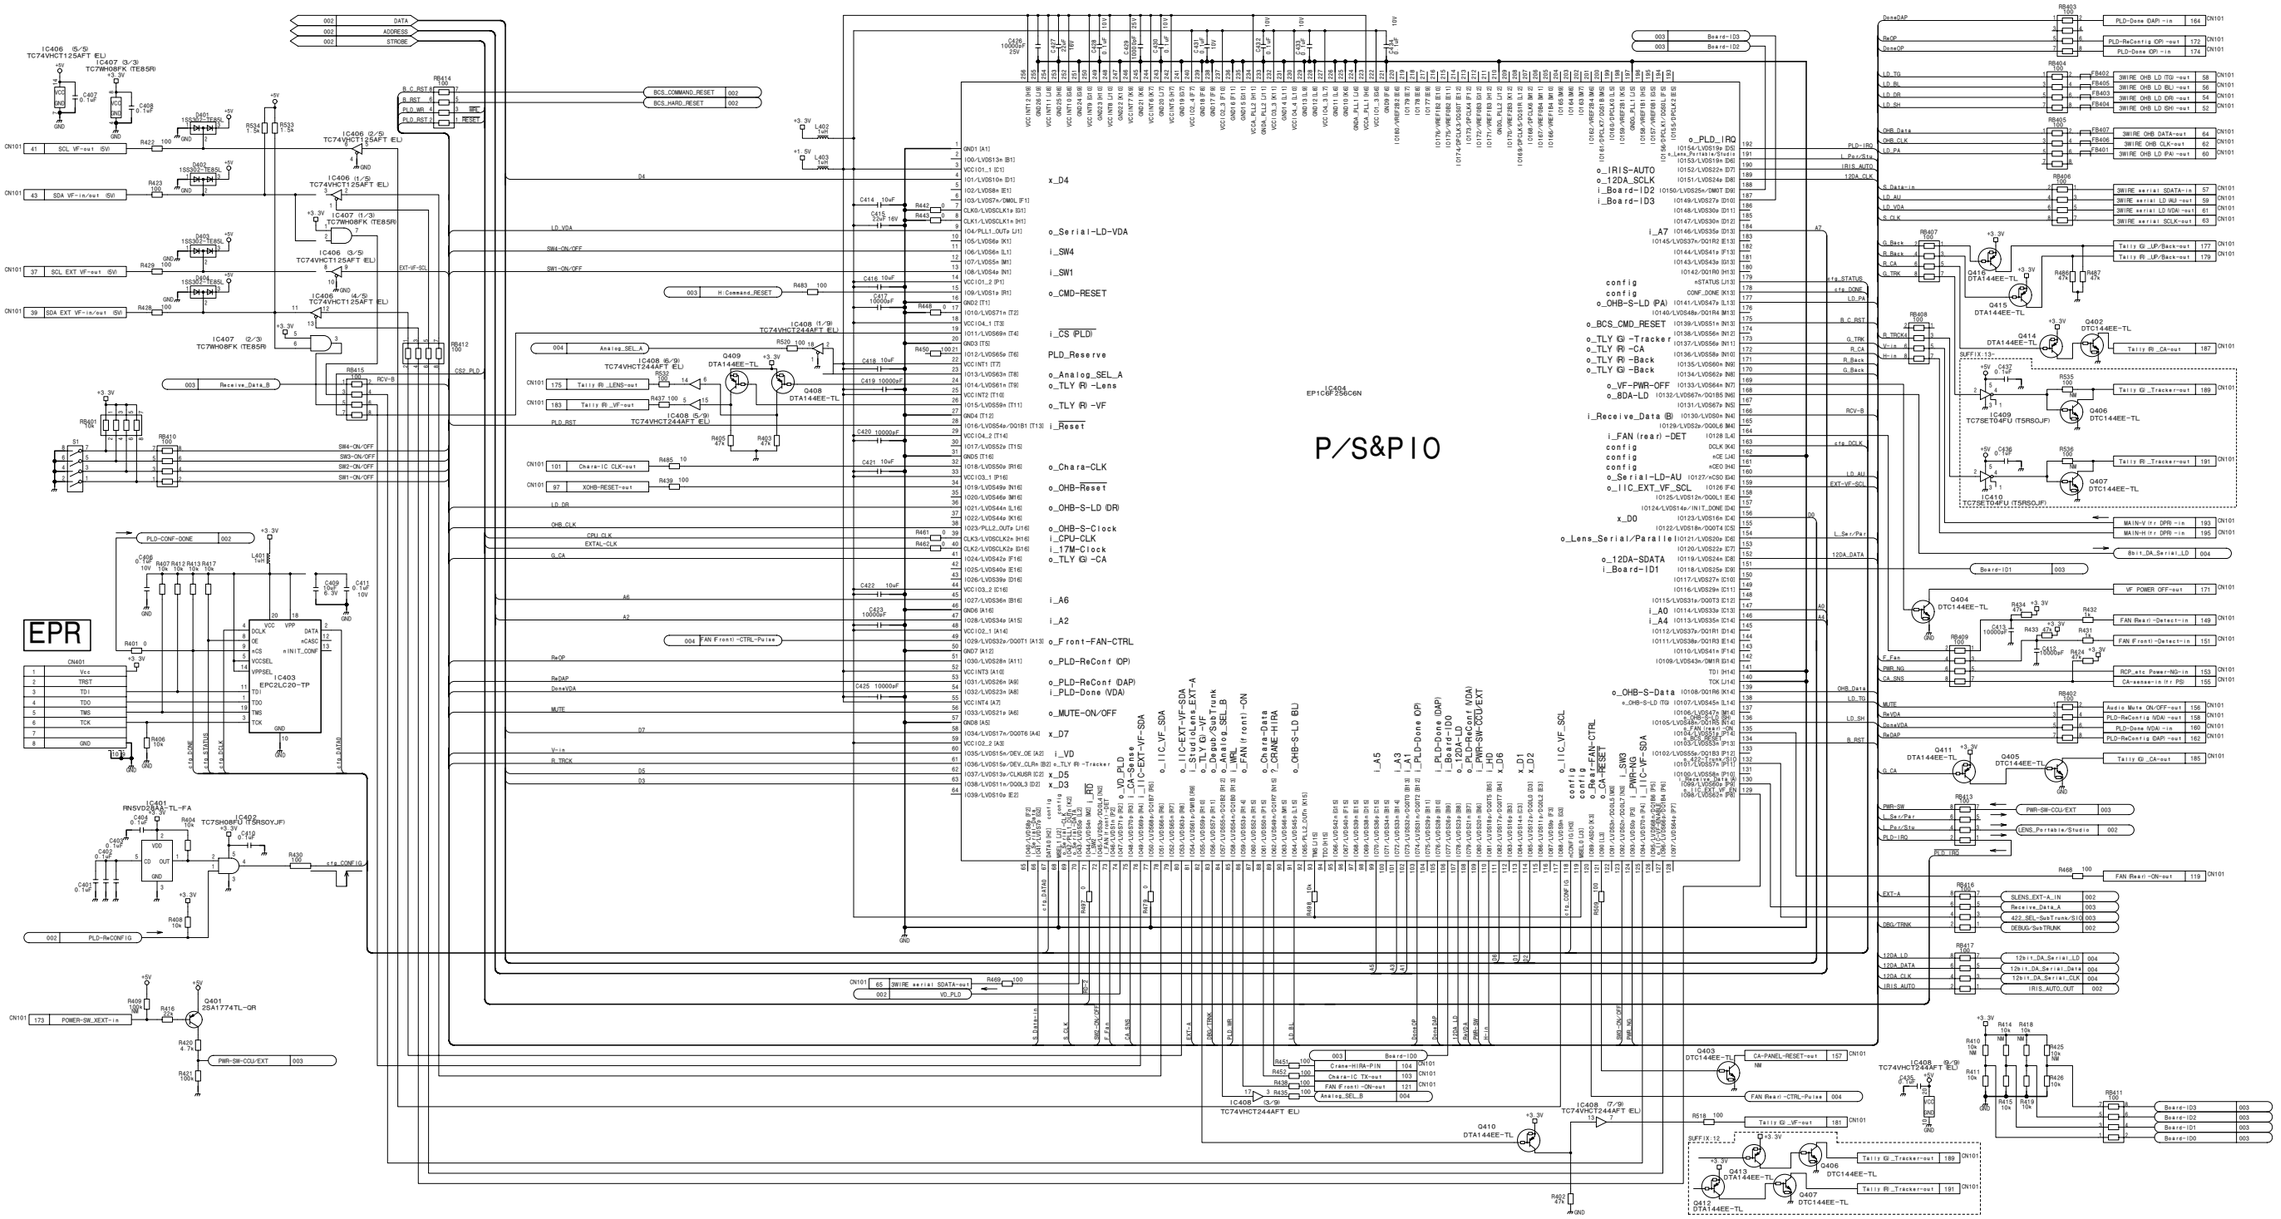


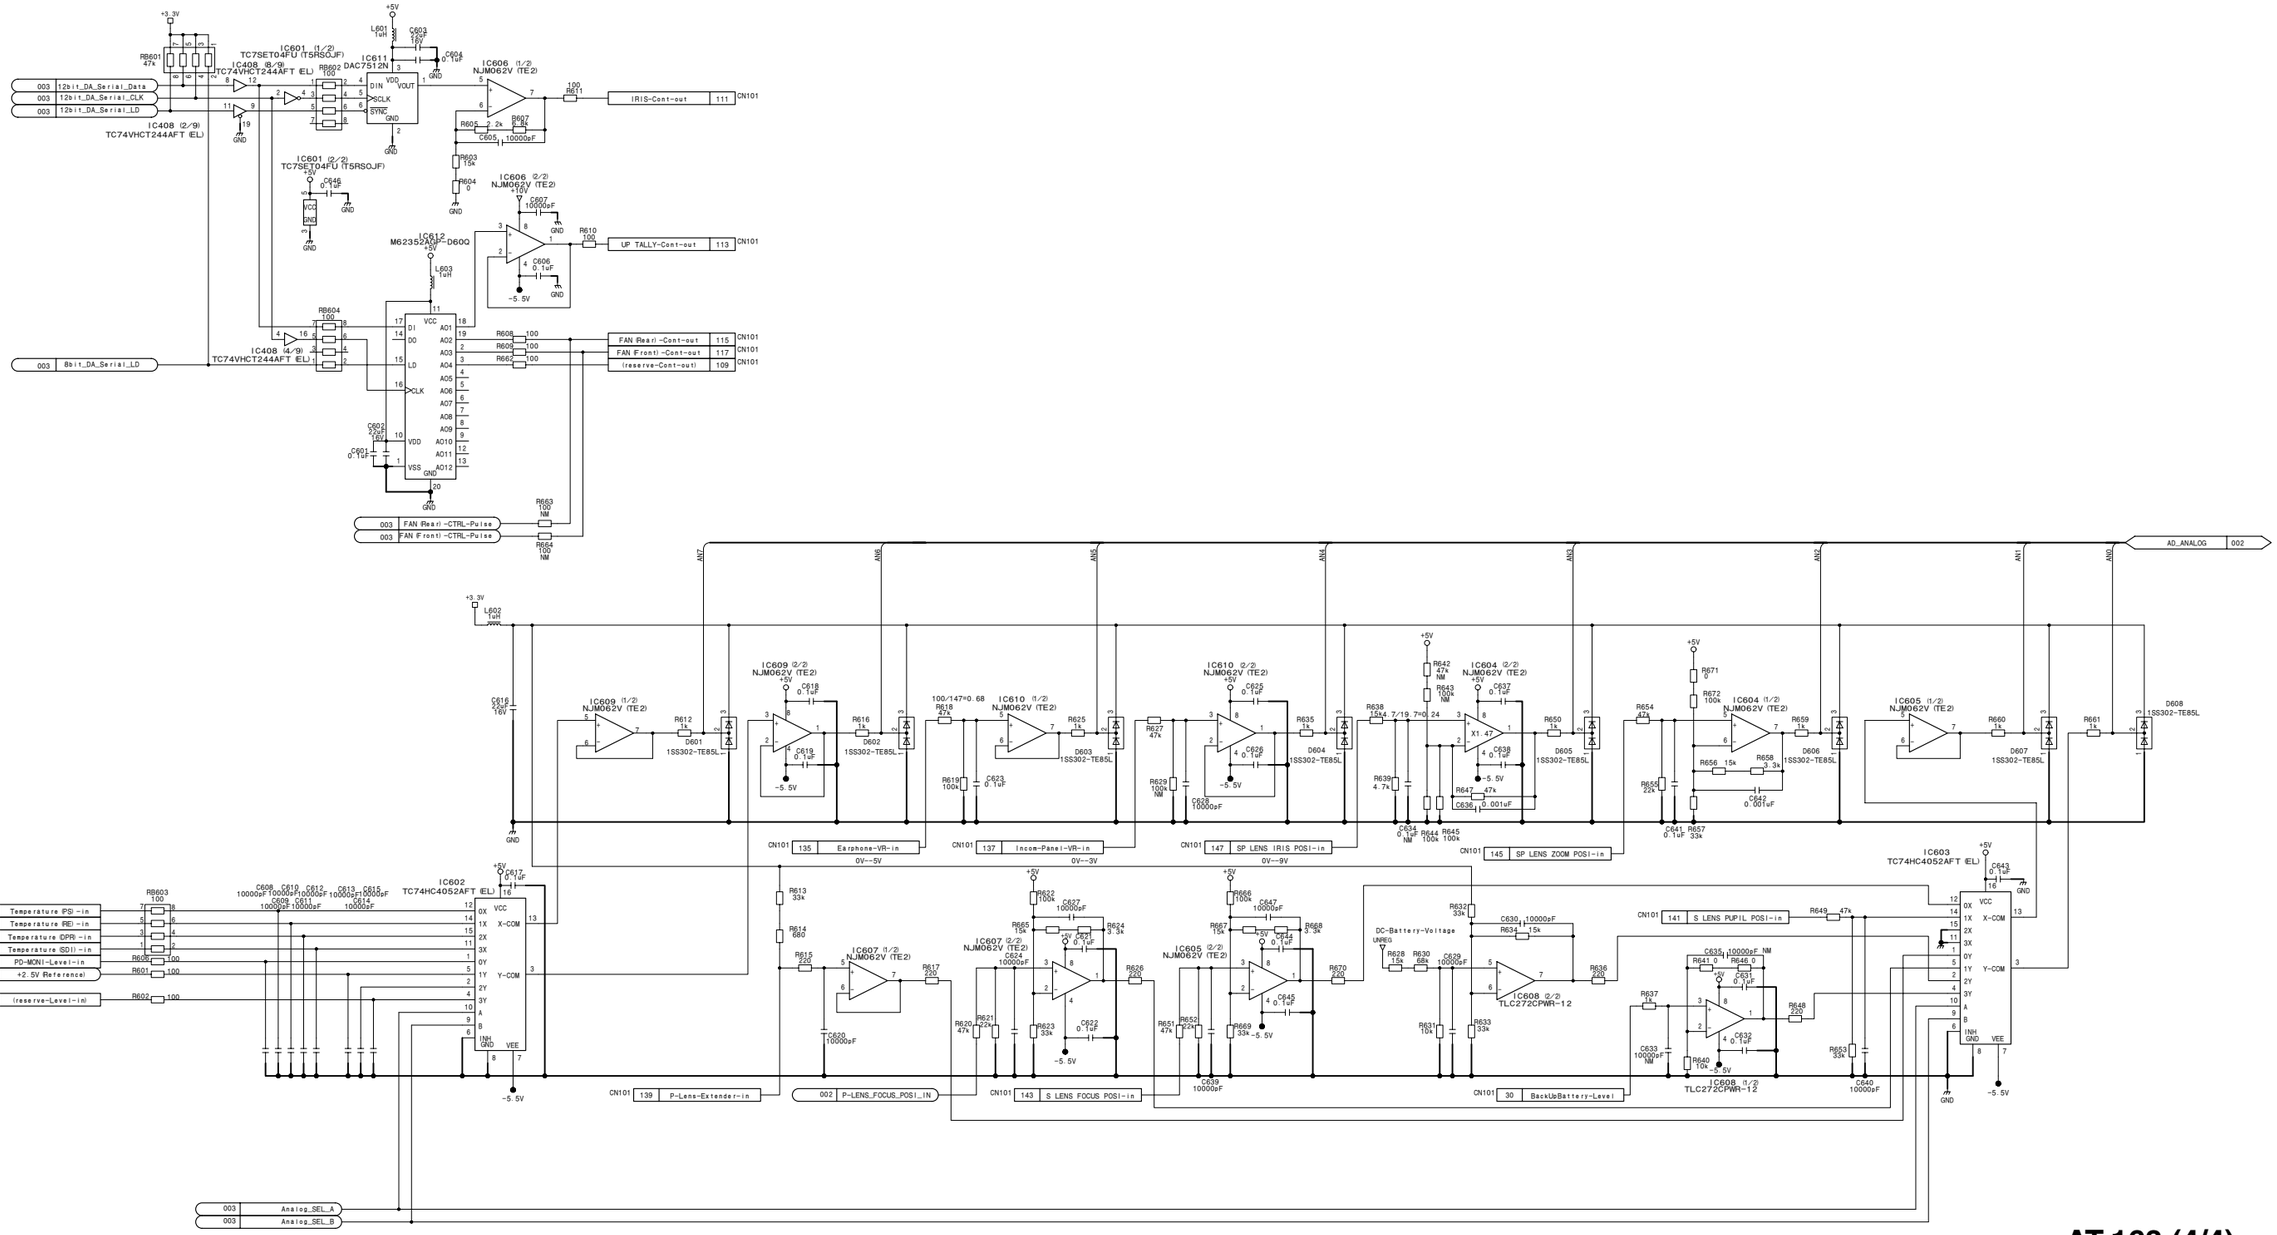


## CHU_IF & UpTally




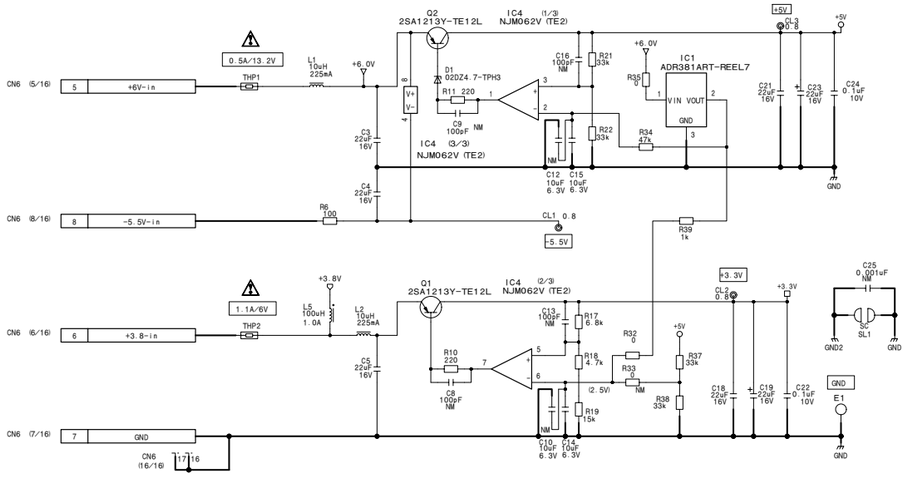

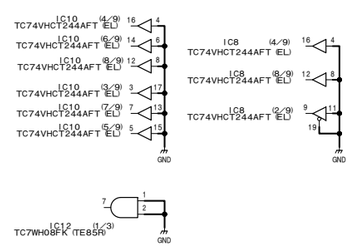
## VF CONTROL

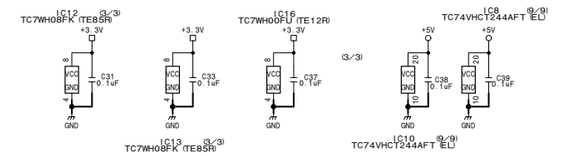


## IIC OPTION

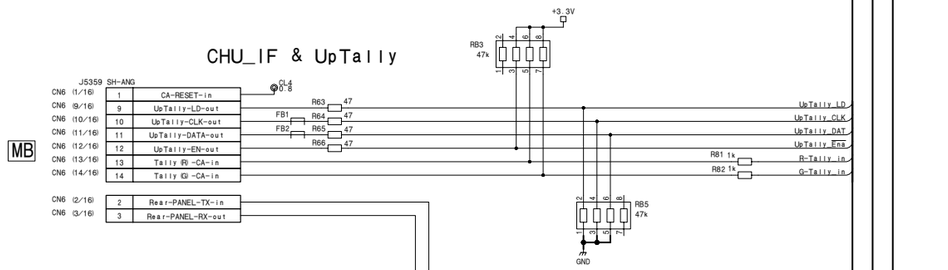

**AT-166** SUFFIX: -11, 21, 31

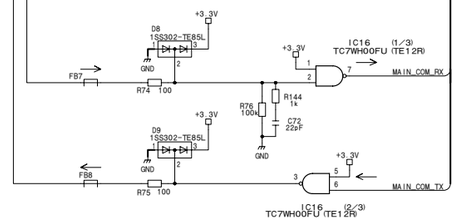FACTORY CONFIG

VR INPUT

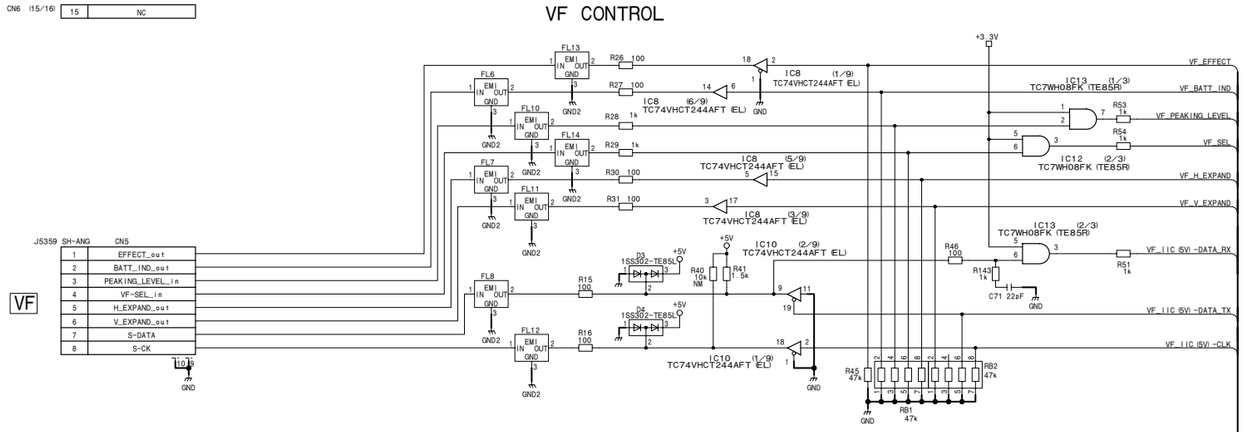Rear Panel
J6491 0.5FFC-ST 30pin×2

*NOTE
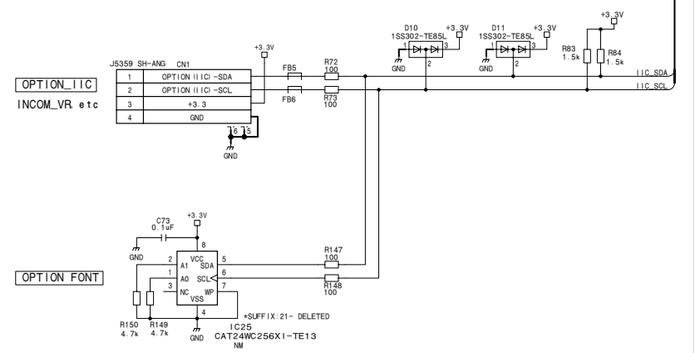
| REF. NO. | SUFFIX 11 | SUFFIX 21~ |
|---|---|---|
| CN3 | MT | NM |
| R106 | 100k | NM |
| R162 | – | 1k |
| R163 | – | 0 |

| | BOOT | NORMAL |
|---|---|---|
| MODE0 | 1 | 1 |
| MODE1 | 1 | 1 |
| MODE2 | 0 | 1 |

**AT-166**
BOARD NO. 1-865-406-11, 21, 31
HDC-1000_AT-166G_021_1

**AU-298 (1/4)**
**SUFFIX: -12**

+16, +7.5, +5 , −5

CN1

| | | | | |
|---|---|---|---|---|
| CN1 | 200 | MB-GND | MB-GND | 199 CN1 |
| CN1 | 198 | MB-GND | MB-GND | 197 CN1 |
| CN1 | 196 | MB-GND | MB-GND | 195 CN1 |
| CN1 | 194 | MB-GND | | |
| CN1 | 192 | MB-GND | | |
| CN1 | 190 | +3.8V | | |
| CN1 | 188 | +3.8V | | 187 CN1 |
| CN1 | 186 | +3.8V | | |
| CN1 | 184 | +3.8V | | |
| CN1 | 182 | +3.8V-B | | |
| CN1 | 180 | +3.8V-B | | 179 CN1 |
| CN1 | 178 | +3.8V-B | | |
| CN1 | 176 | +3.8V-B | | |
| CN1 | 174 | | | 173 CN1 |
| CN1 | 172 | | | 171 CN1 |
| CN1 | 170 | GND | | |
| CN1 | 168 | GND | | |
| CN1 | 166 | GND | | 165 CN1 |
| CN1 | 162 | | | |
| CN1 | 160 | | | |
| CN1 | 158 | | | 157 CN1 |
| CN1 | 154 | | | |
| CN1 | 152 | | | |
| CN1 | 150 | IUnreg+17V | | 149 CN1 |
| CN1 | 148 | IUnreg+17V | | |
| CN1 | 146 | IUnreg+17V | | |
| CN1 | 144 | IUnreg+17V | | |
| CN1 | 142 | IUnreg+17V | GND | 141 CN1 |
| CN1 | 140 | IUnreg+17V | GND | 139 CN1 |
| CN1 | 138 | IUnreg+17V | | |
| CN1 | 136 | IUnreg+17V | | |
| CN1 | 134 | IUnreg+17V | | 133 CN1 |
| CN1 | 132 | IUnreg+17V | | |
| CN1 | 130 | IUnreg+17V | | |
| CN1 | 128 | IUnreg+17V | | 127 CN1 |
| CN1 | 126 | IUnreg+17V | | |
| CN1 | 124 | IUnreg+17V | | |
| CN1 | 122 | IUnreg+17V | | |
| CN1 | 120 | IUnreg+17V | | |
| CN1 | 118 | STBY-AU-Pow IUnreg | -in | |
| CN1 | 116 | STBY-AU-Pow IUnreg | -in | |
| CN1 | 114 | Unreg +10.5V_+17V | | |
| CN1 | 112 | Unreg +10.5V_+17V | | |
| CN1 | 110 | INC | | |
| CN1 | 108 | MB-GND | MB-GND | 107 CN1 |
| CN1 | 106 | MB-GND | MB-GND | 105 CN1 |
| CN1 | 104 | INC | | |
| CN1 | 117 | | | CN1 |
| CN1 | 115 | | | CN1 |
| CN1 | 113 | | | CN1 |
| CN1 | 109 | | | CN1 |

10-17- (2⑥)

0.225Amax




**AU-298 (1/4)**
BOARD NO. 1-865-933-12
HDC-1500_AU-298_012_1

# AU-298 (2/4)
**SUFFIX: -12**

AU-298 (2/4)
SUFFIX: -12

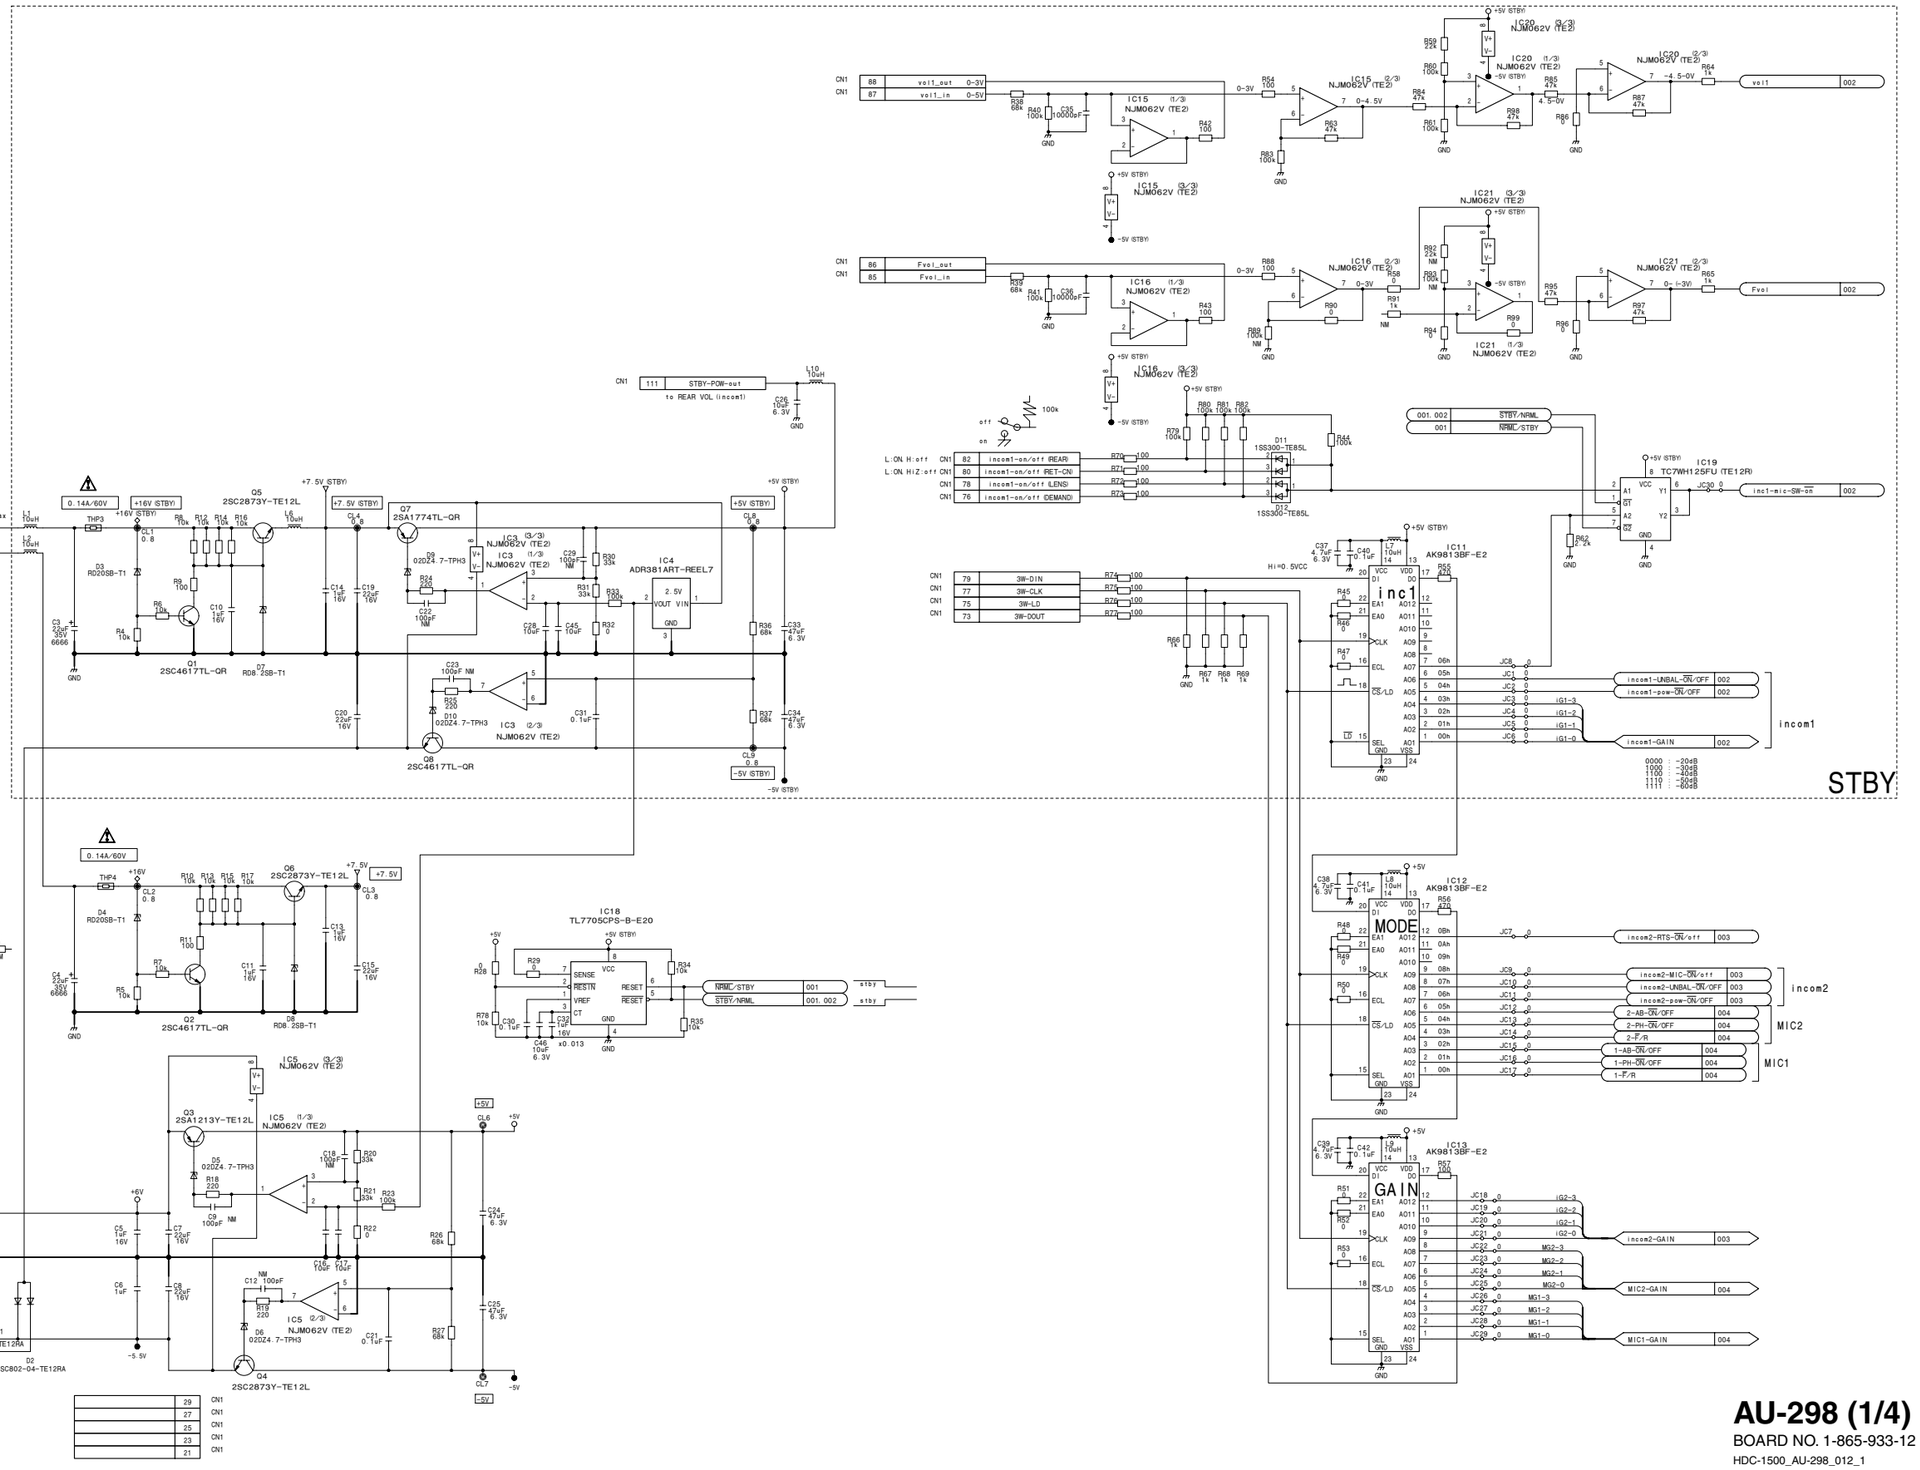


STBY

**AU-298 (2/4)**
BOARD NO. 1-865-933-12
HDC-1500_AU-298_012_2




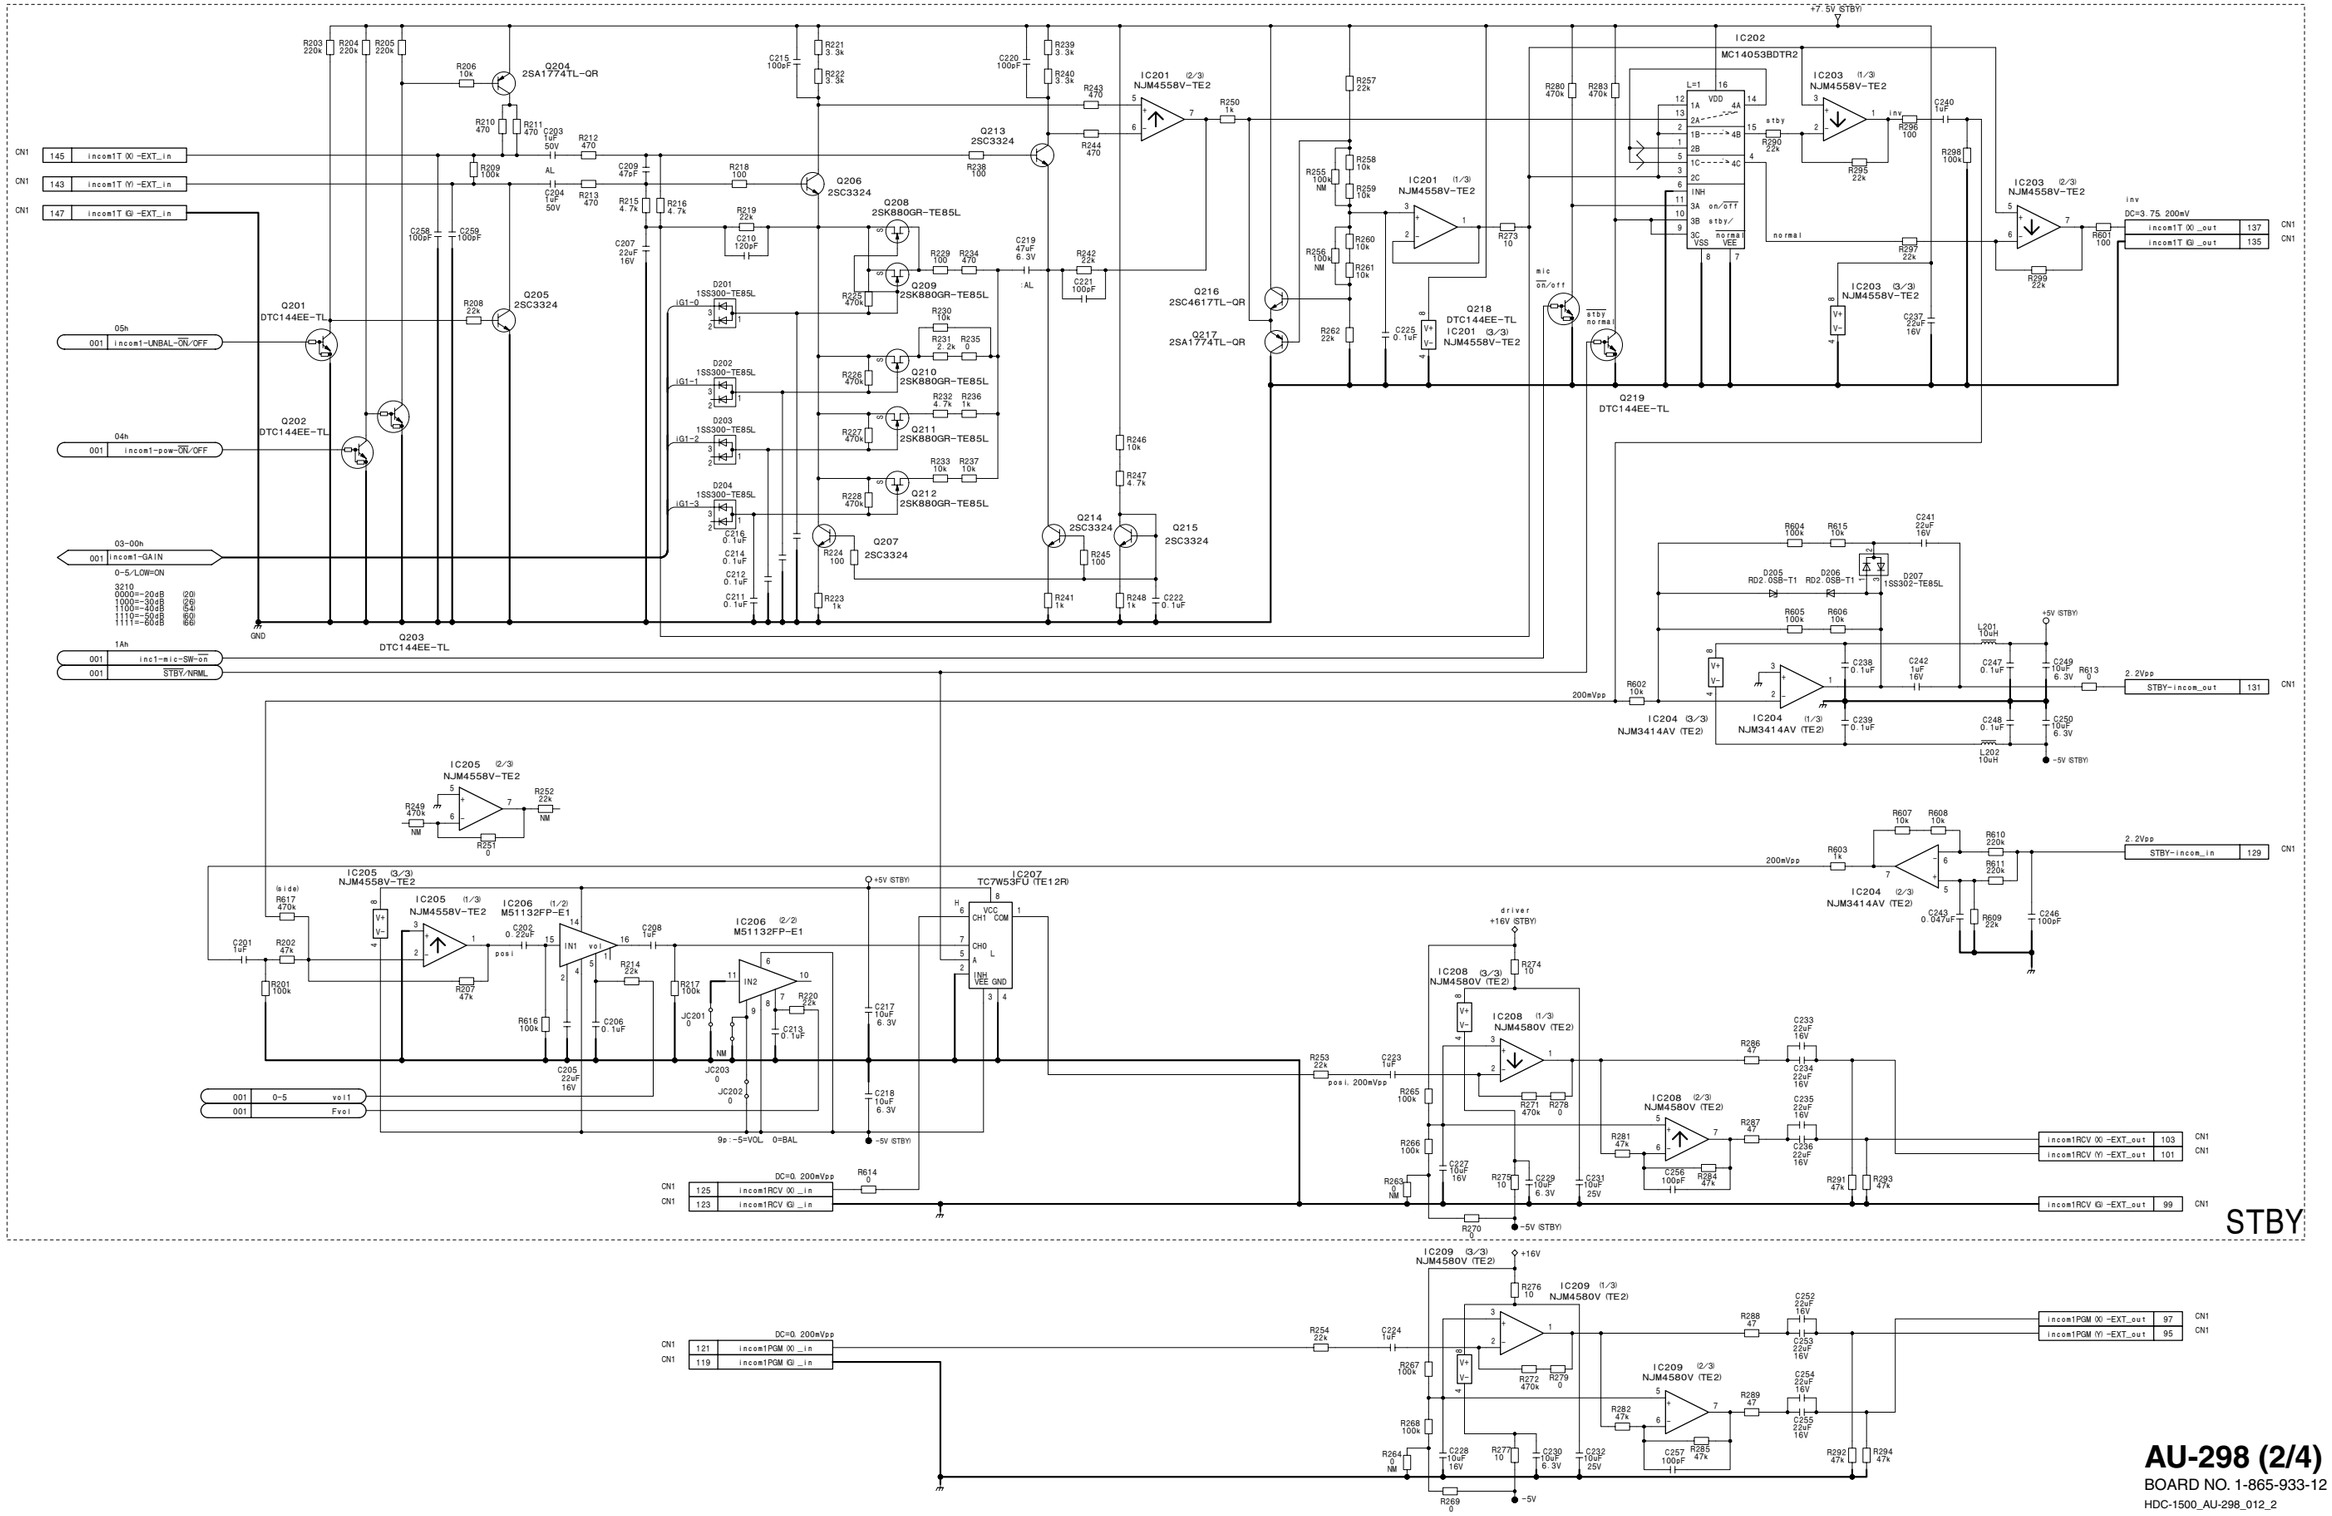

**AU-298 (3/4)**
BOARD NO. 1-865-933-12
HDC-1500_AU-298_012_3

HDC1000/V2 (J, E)

# AU-298 (4/4)
**SUFFIX: -12**

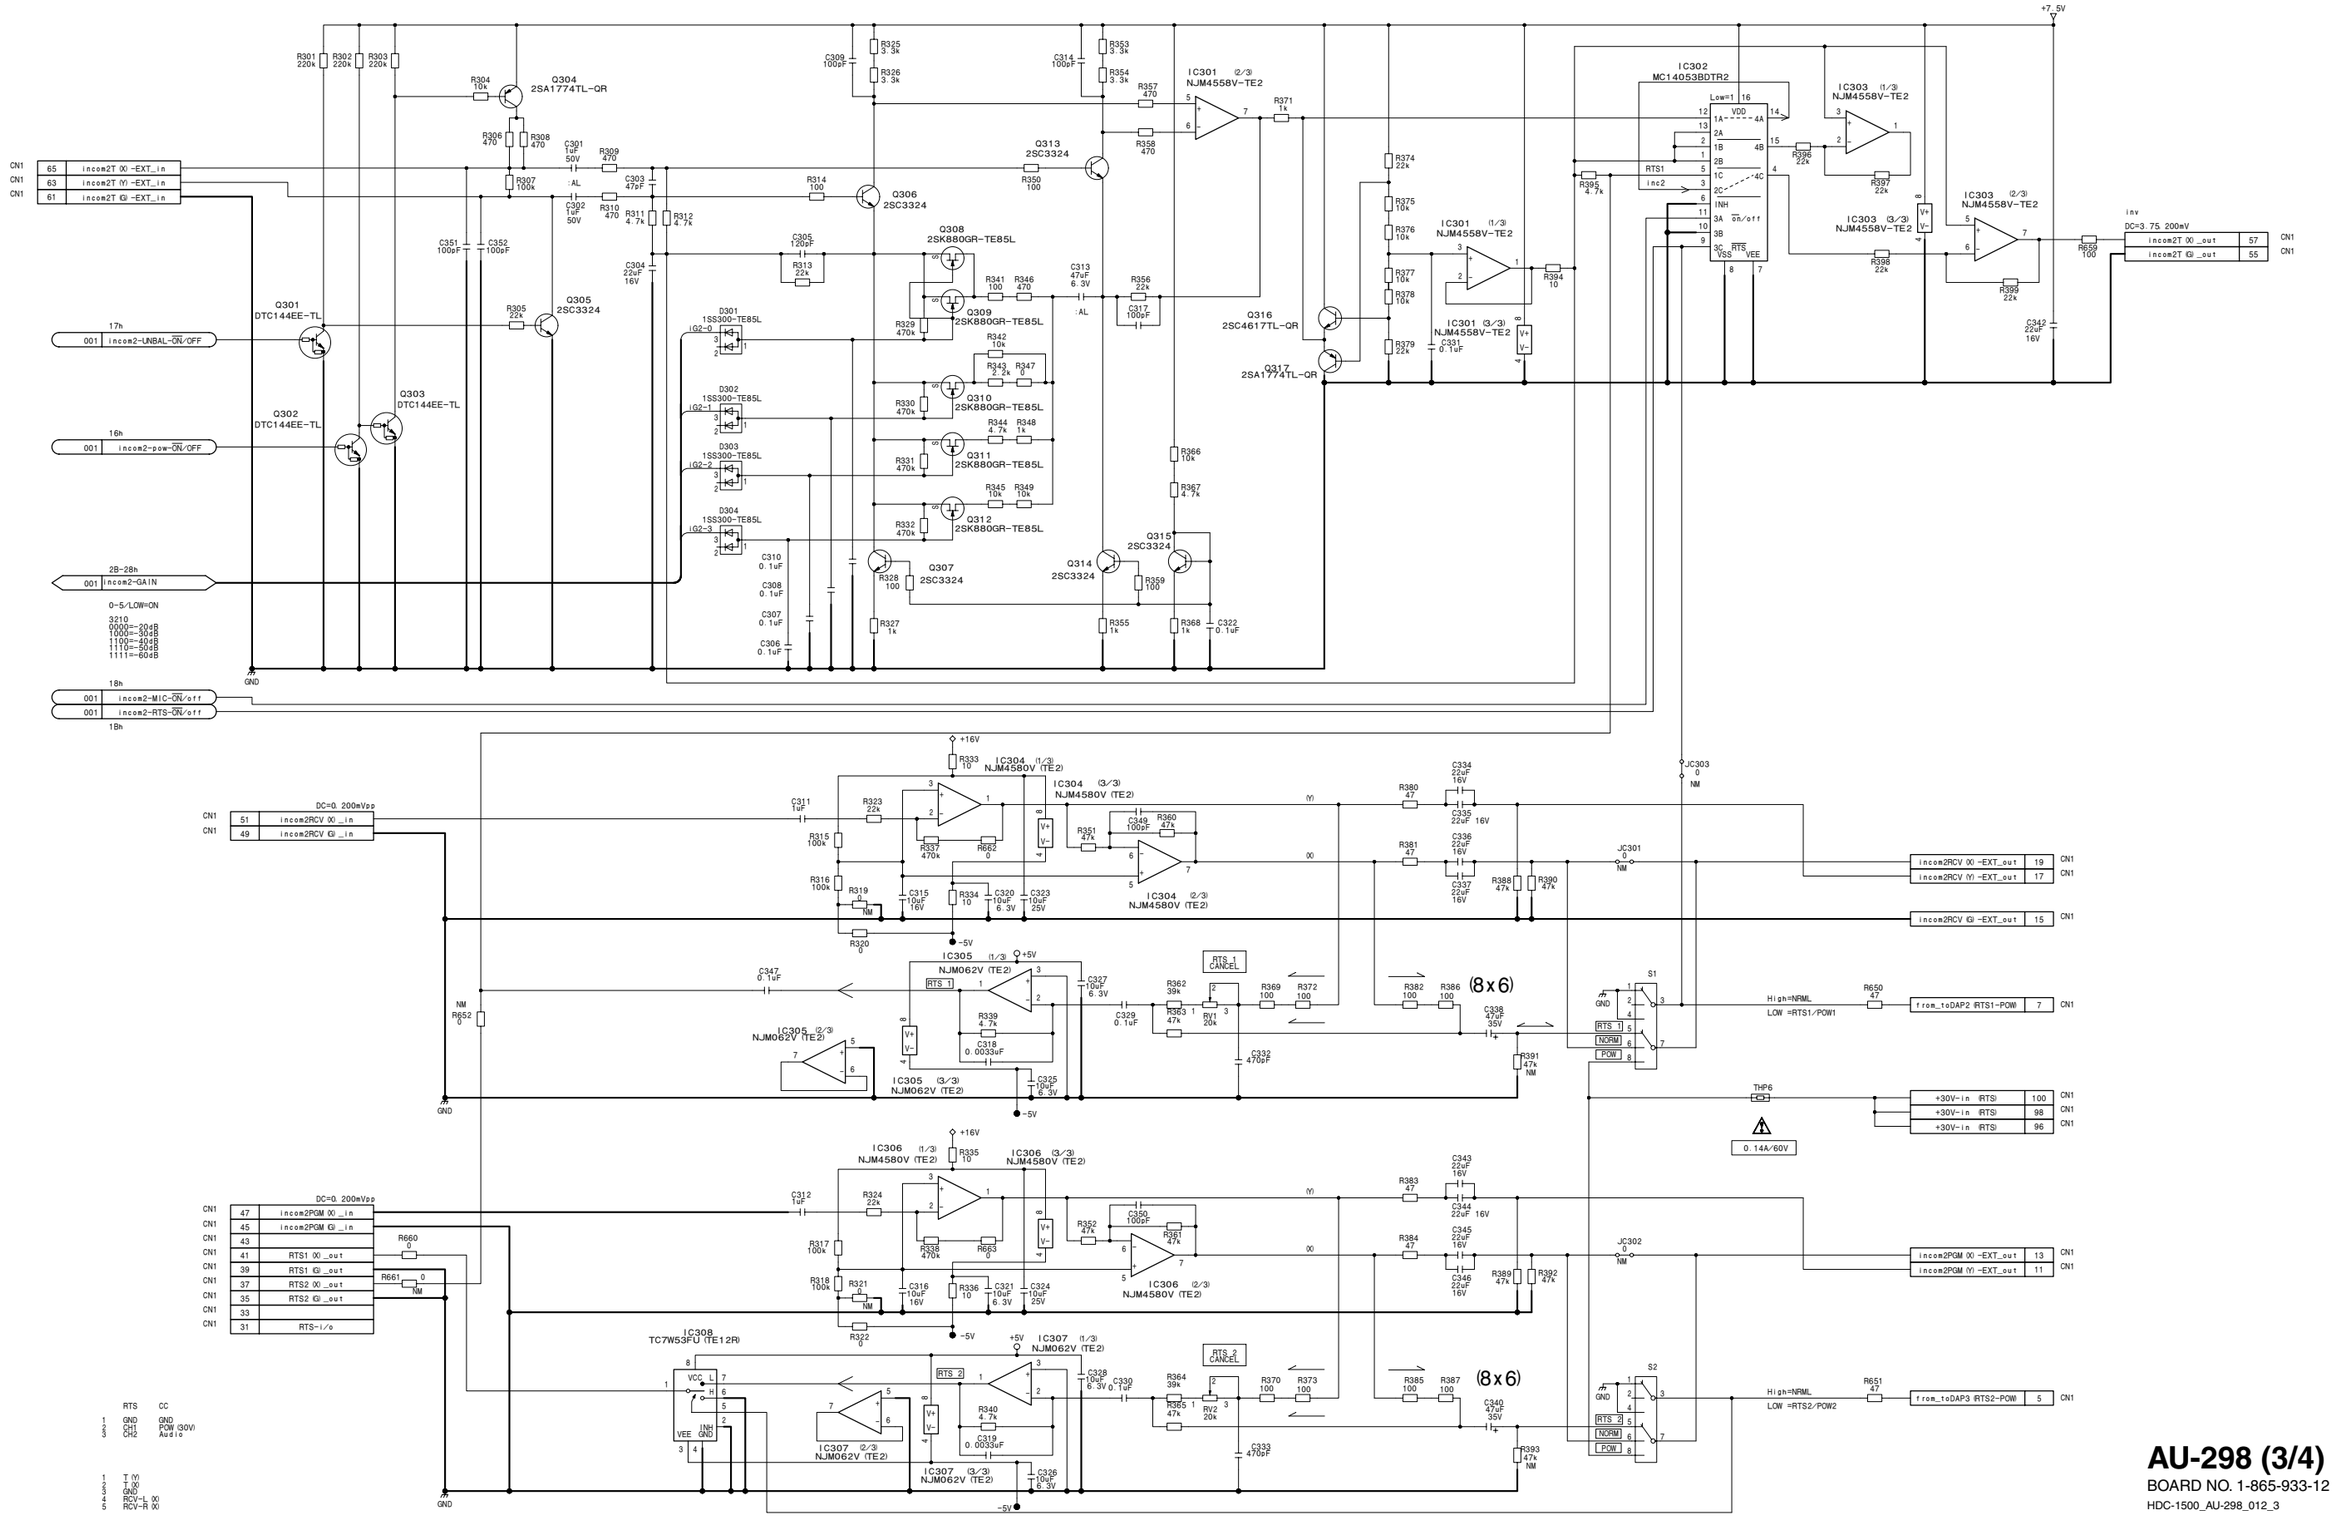AU-298 (4/4)
SUFFIX: -12




AU-298 (4/4)
BOARD NO. 1-865-933-12
HDC-1500_AU-298_012_4

# AU-298 (1/4)
SUFFIX: -13, 31

AU-298 (1/4)
SUFFIX: -13, 31

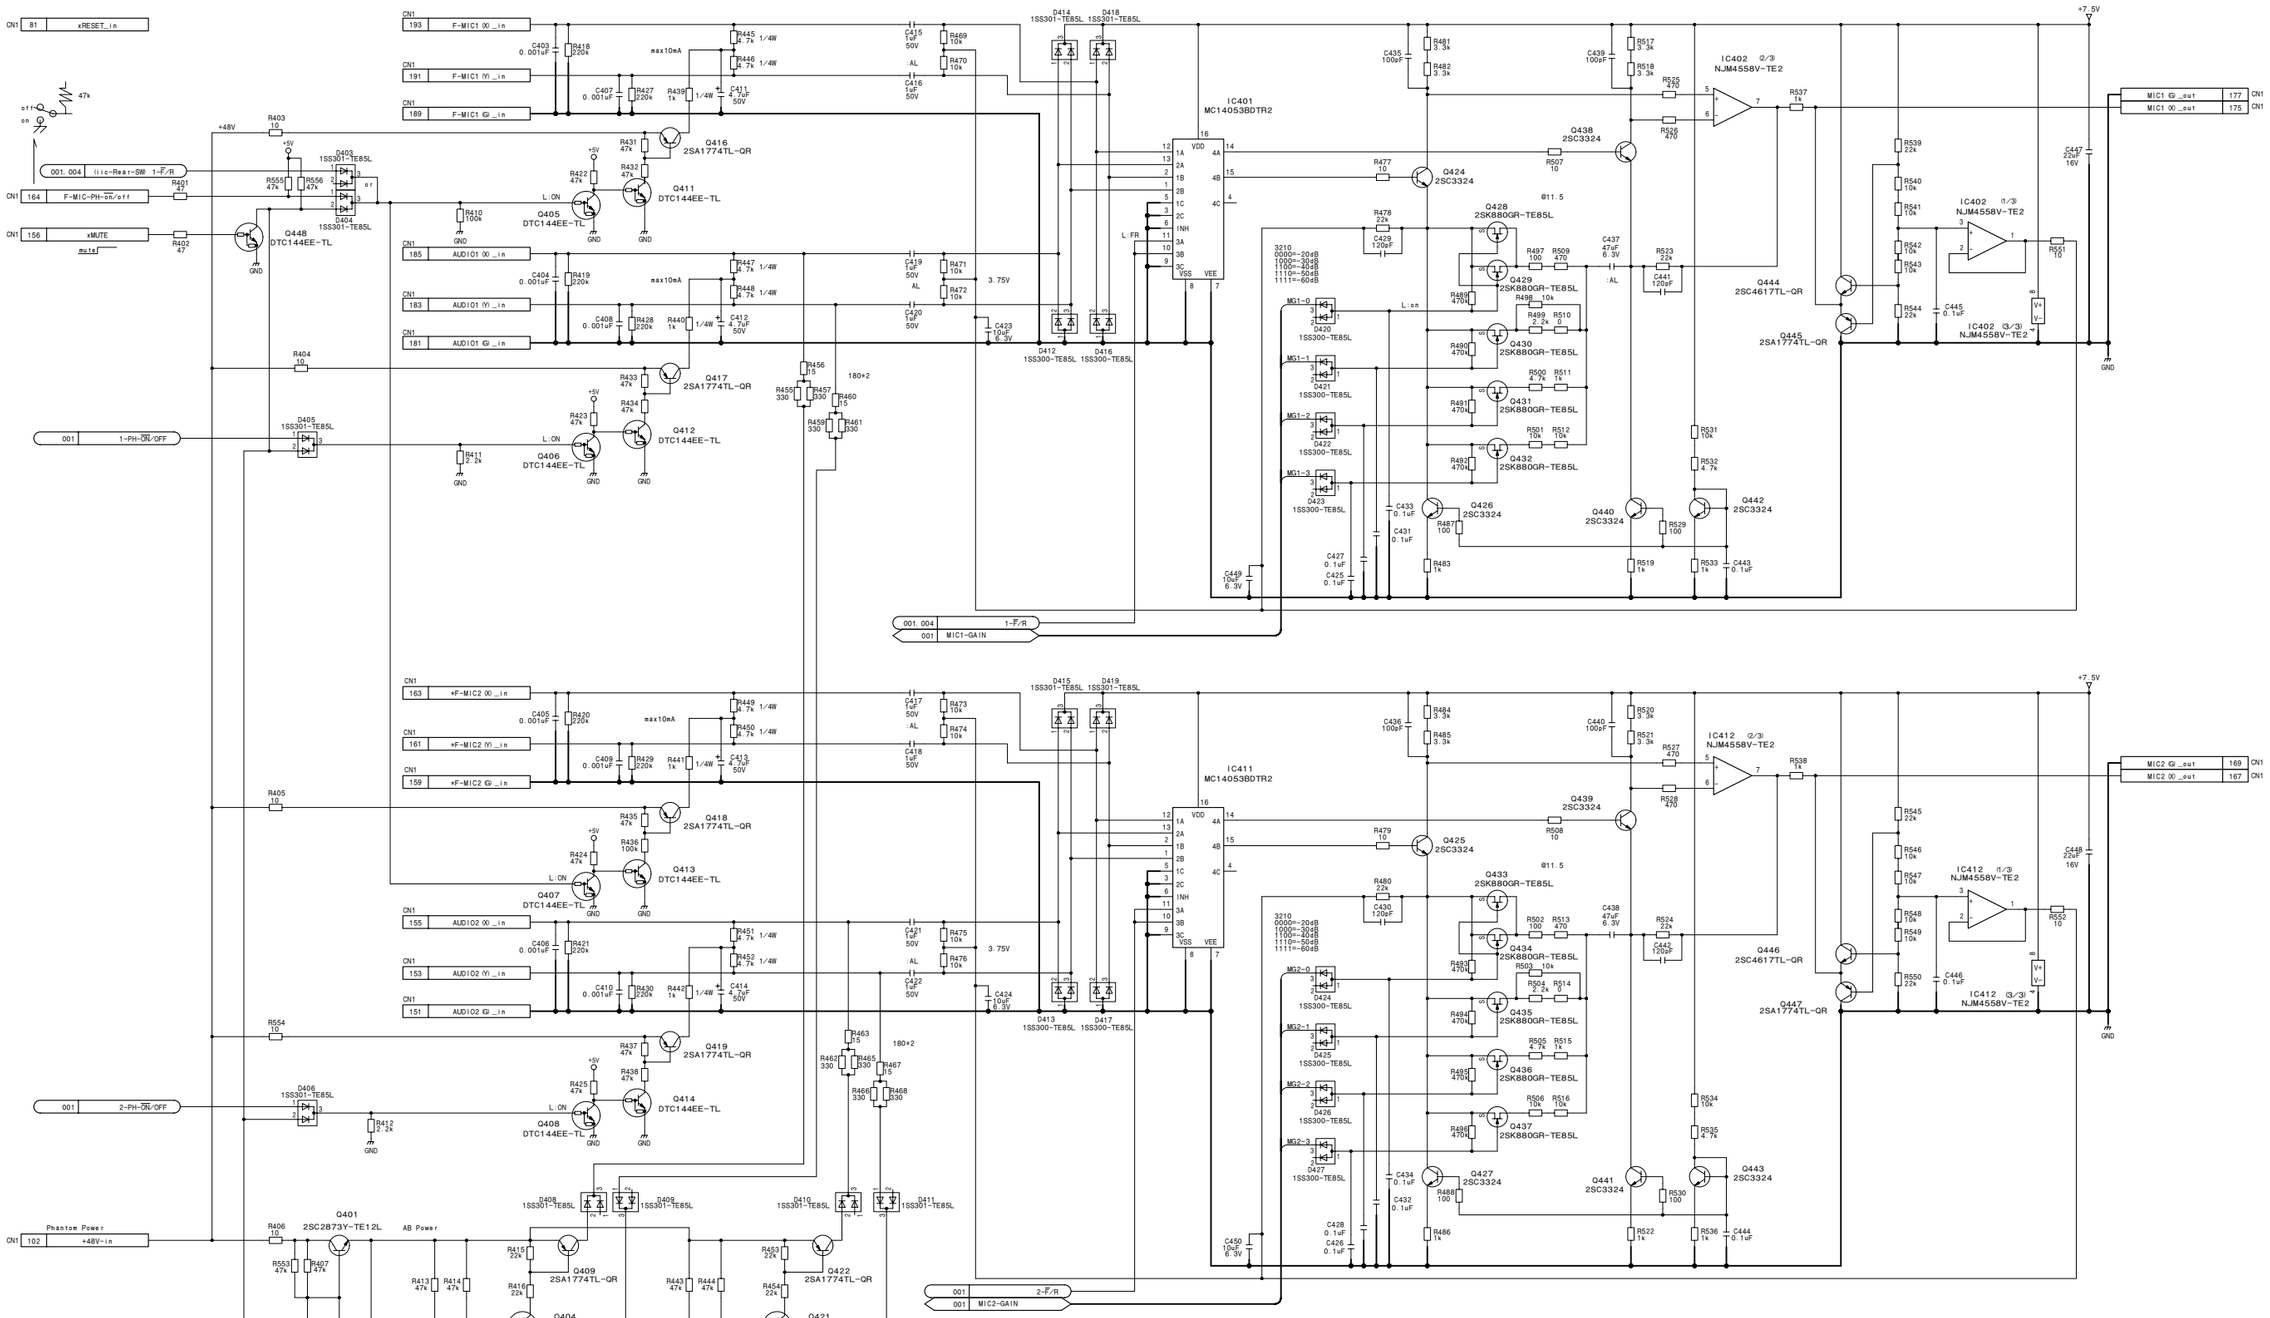


4-12 (a)

4-12 (a)

HDC1000/V2 (J, E)

# AU-298 (1/4)
BOARD NO. 1-865-933-13, 31
HDC-1500_AU-298_013_1
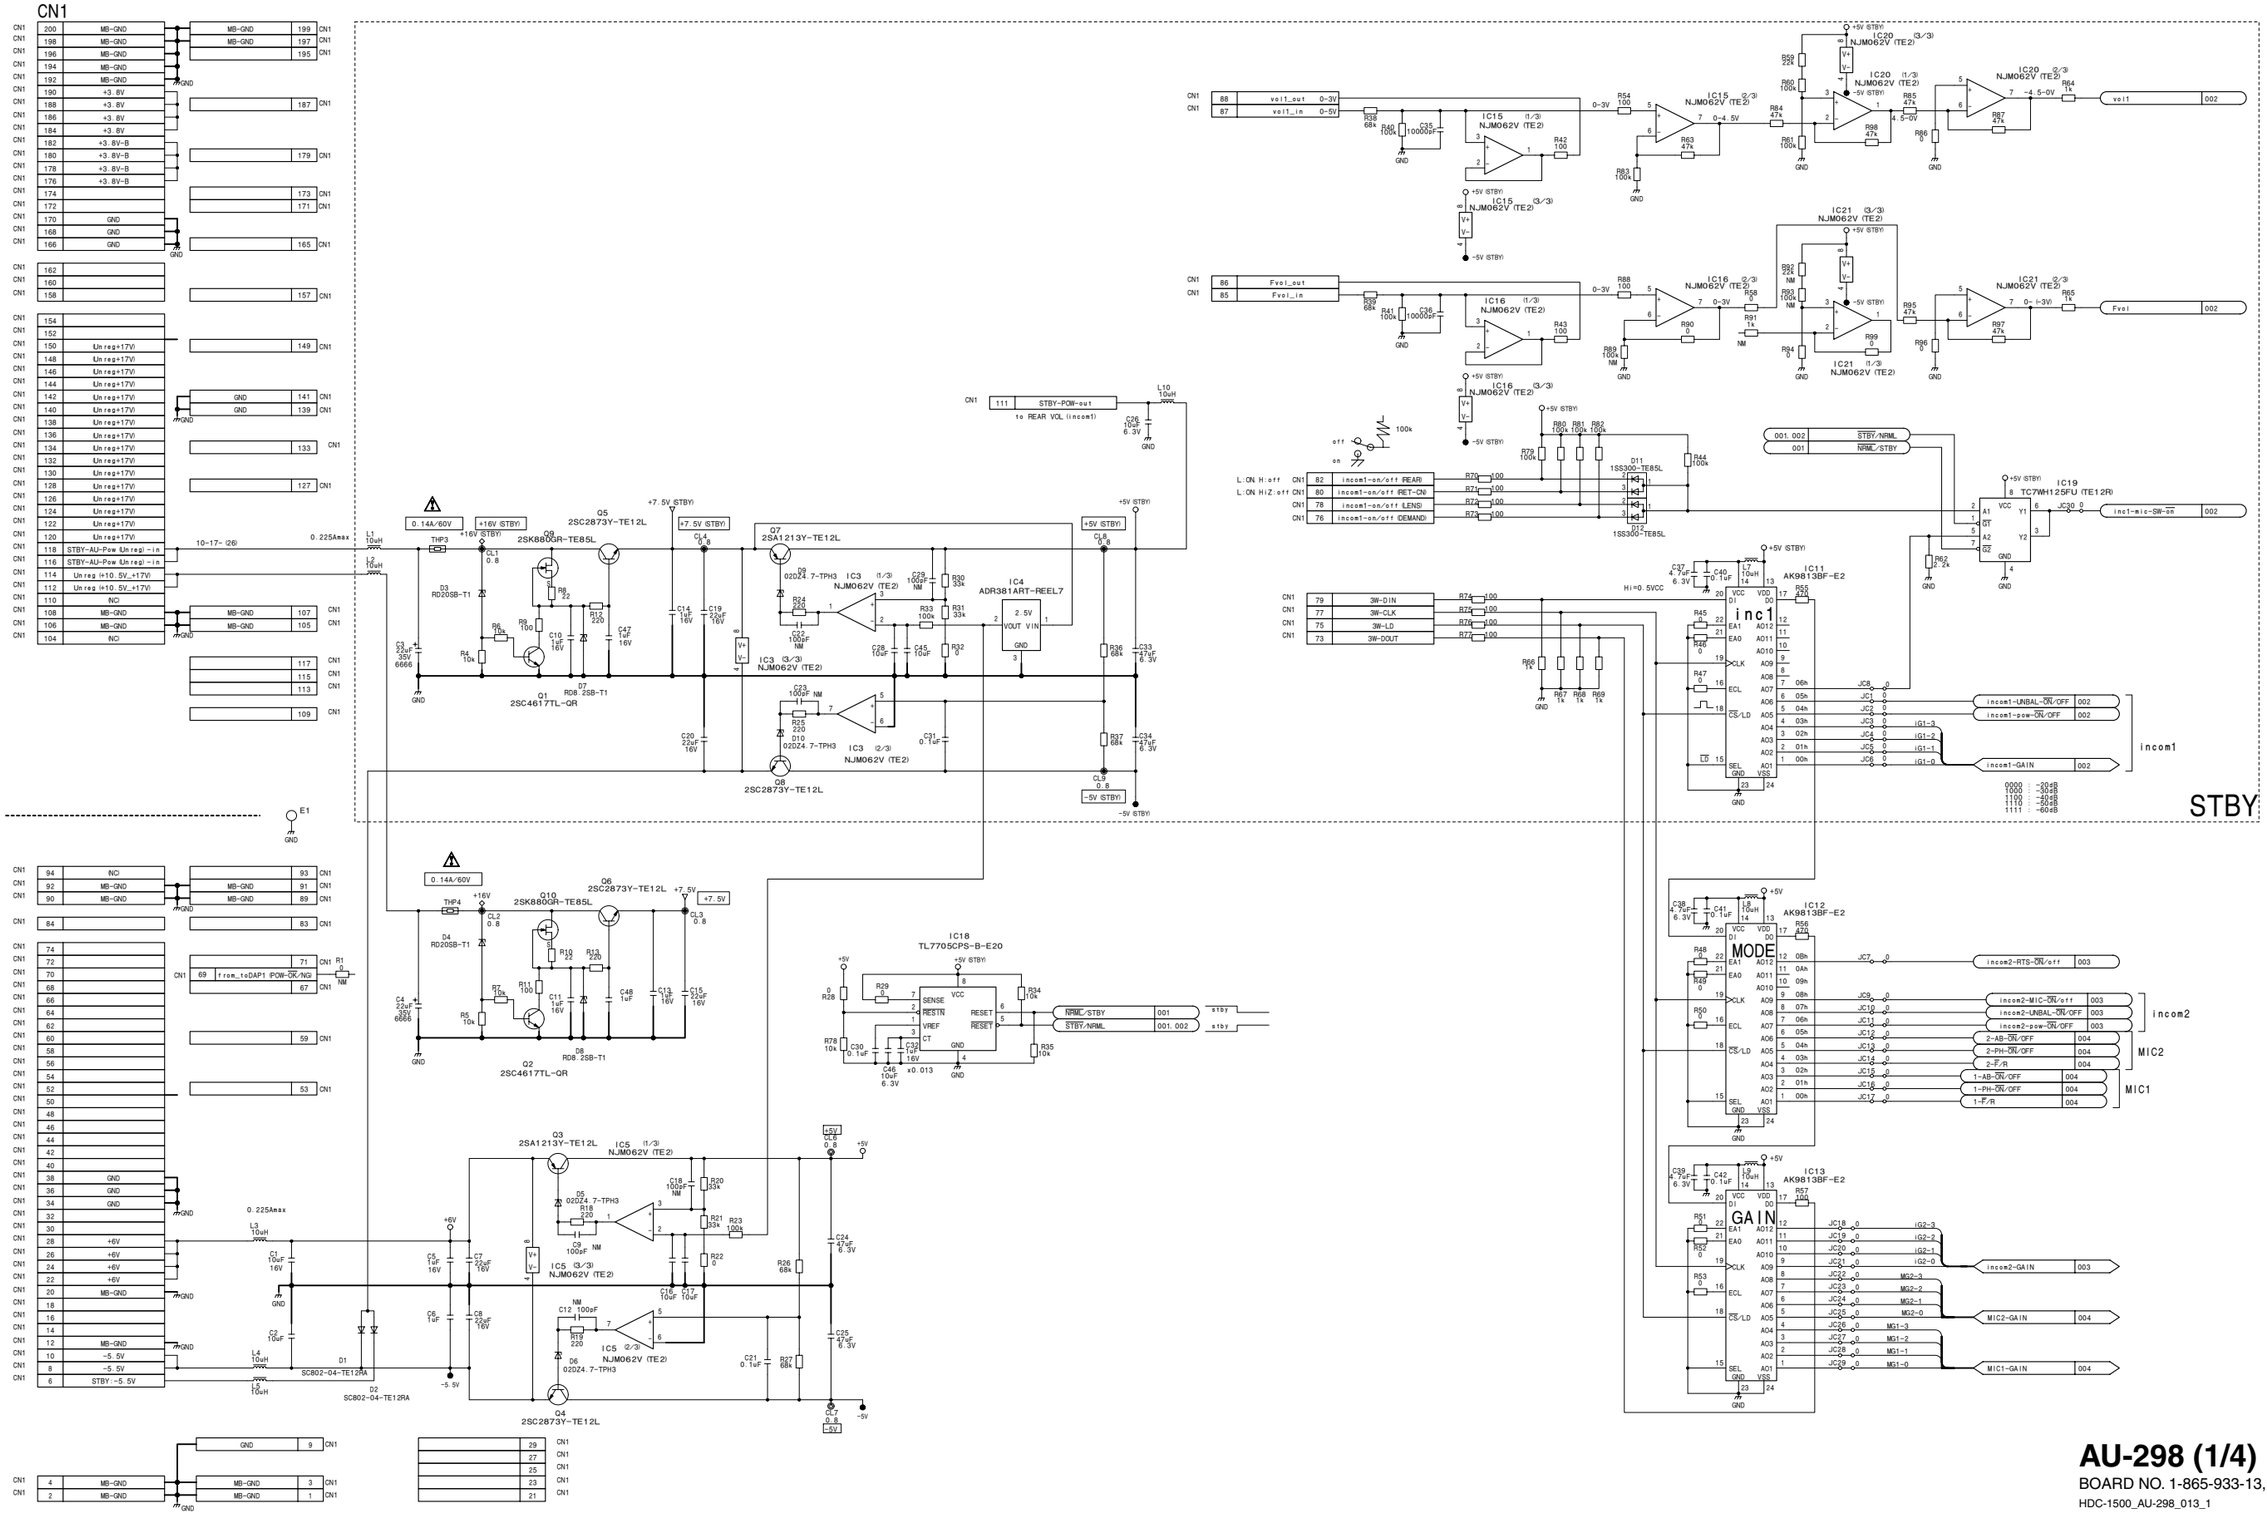
# AU-298 (2/4)
**SUFFIX: -13, 31**

AU-298 (2/4)
SUFFIX: -13, 31




# AU-298 (2/4)
BOARD NO. 1-865-933-13, 31
HDC-1500_AU-298_013_2

# AU-298 (3/4)
**SUFFIX: -13, 31**

AU-298 (3/4)
SUFFIX: -13, 31

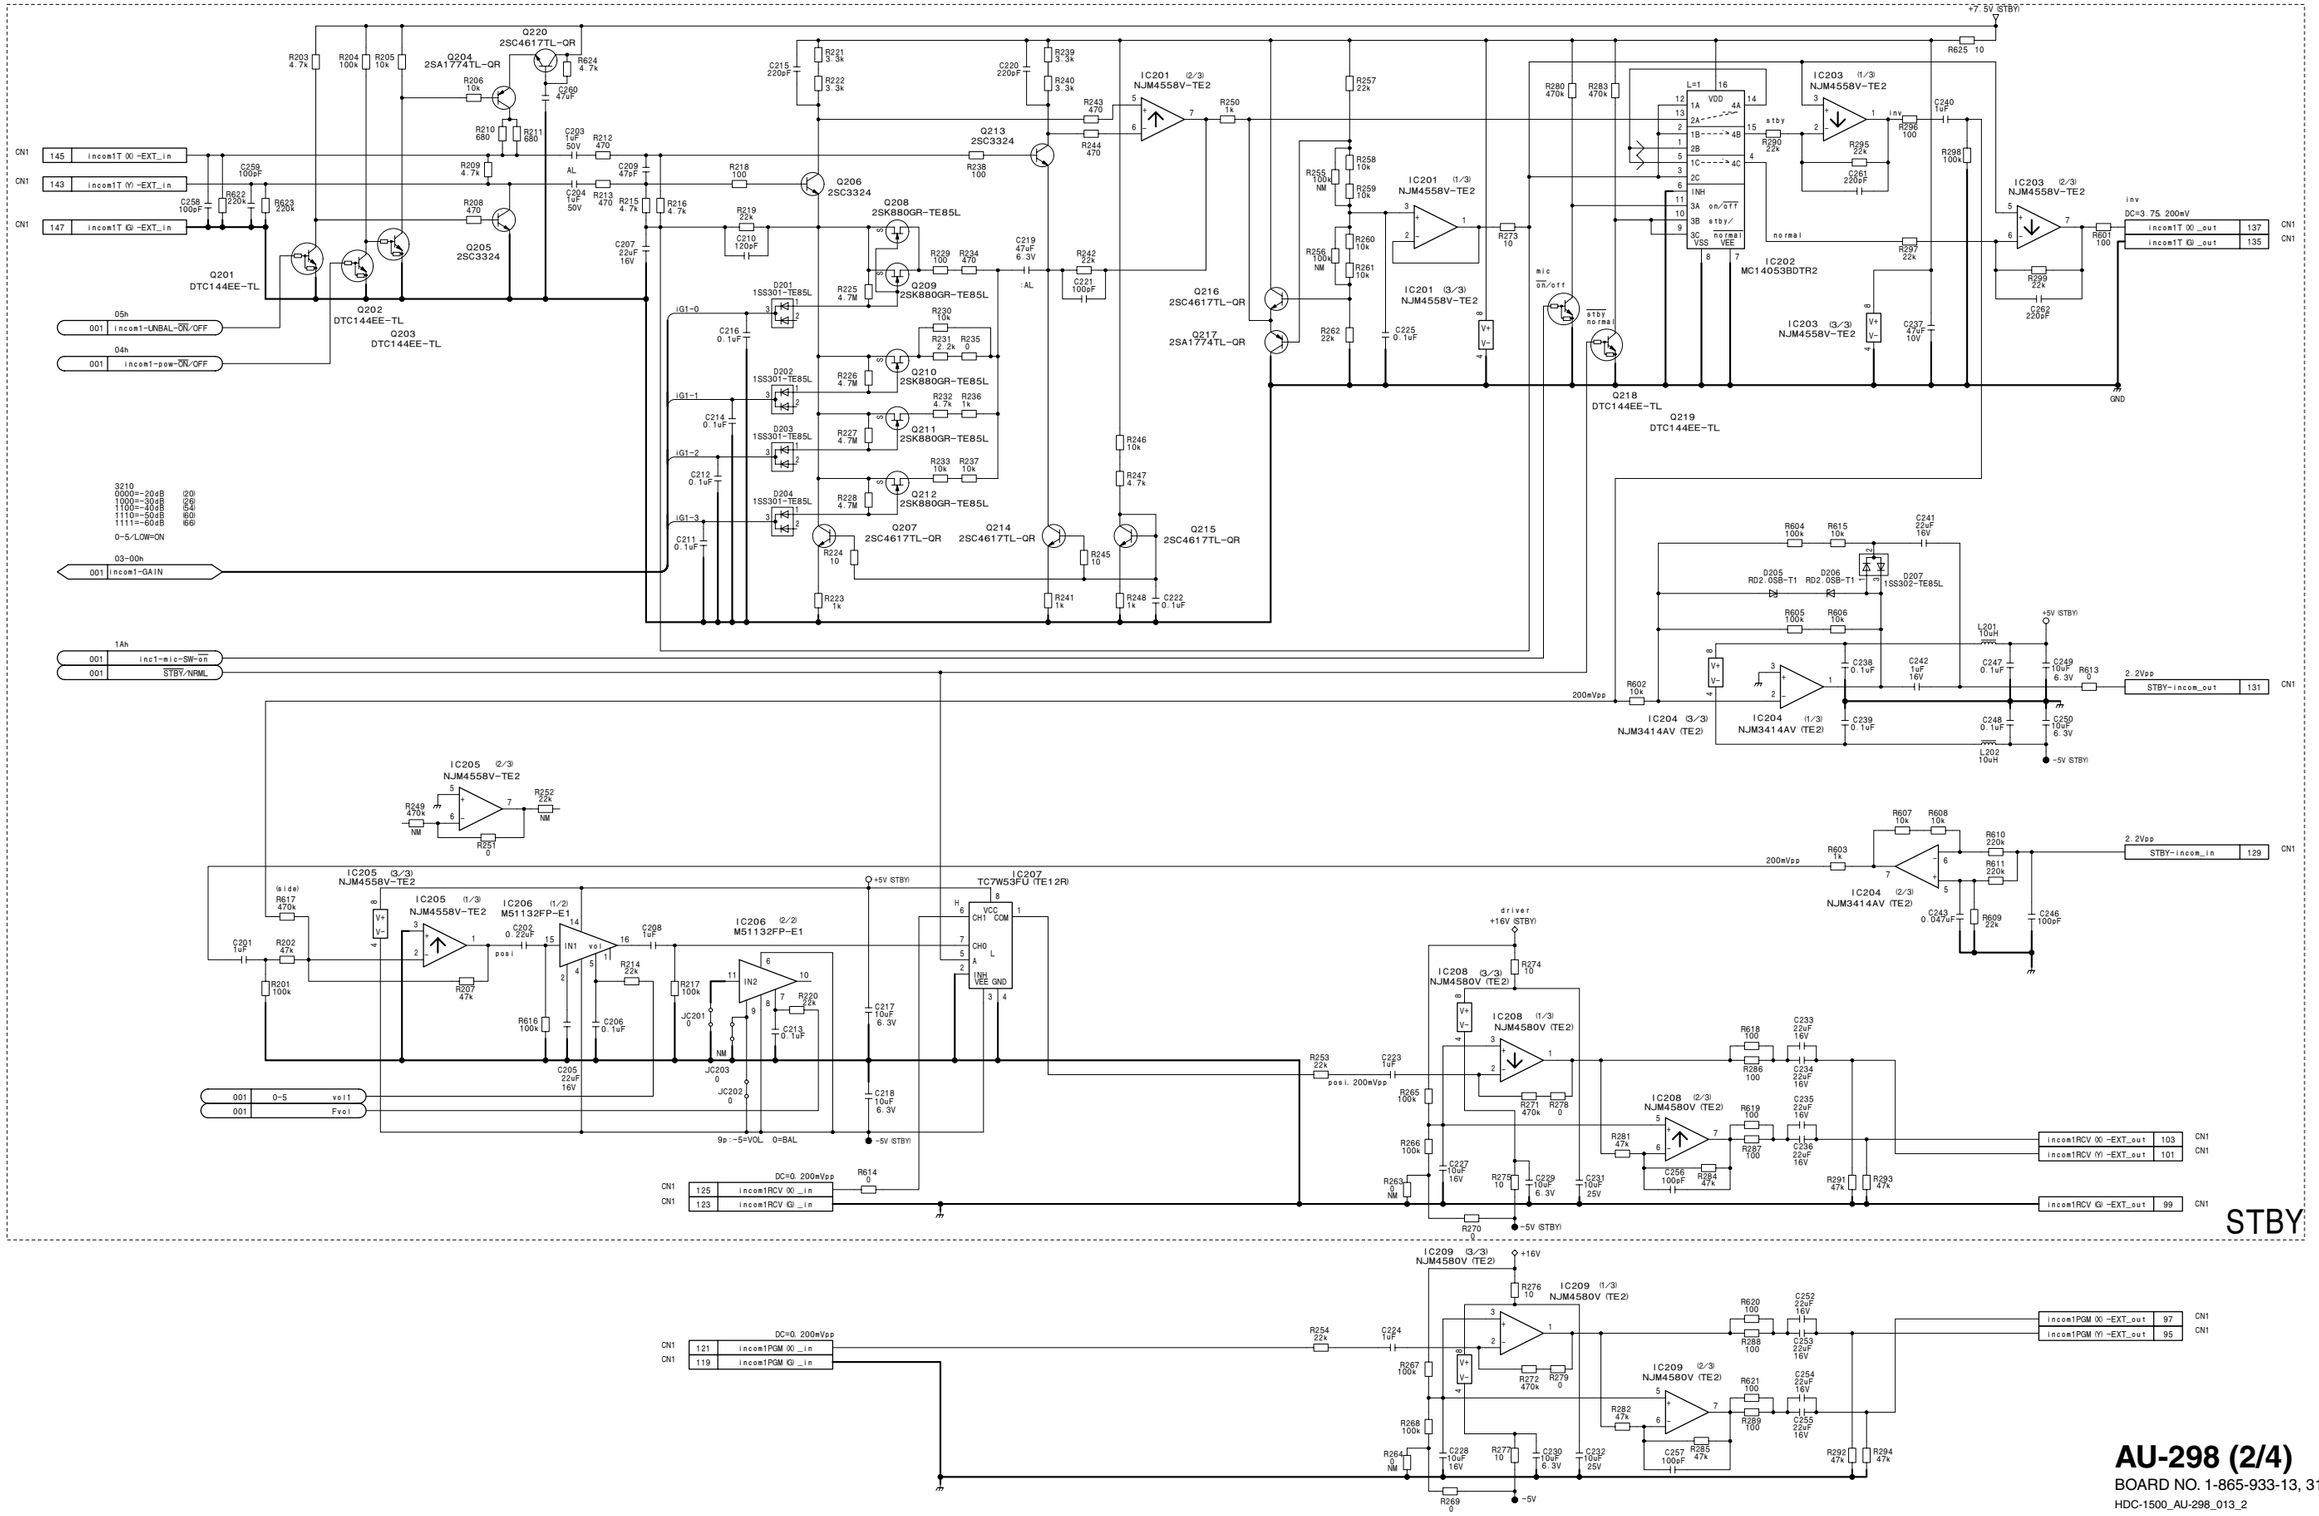


**AU-298 (3/4)**
BOARD NO. 1-865-933-13, 31
HDC-1500_AU-298_013_3

# AU-298 (4/4)

**SUFFIX: -13, 31**

AU-298 (4/4)
SUFFIX: -13, 31

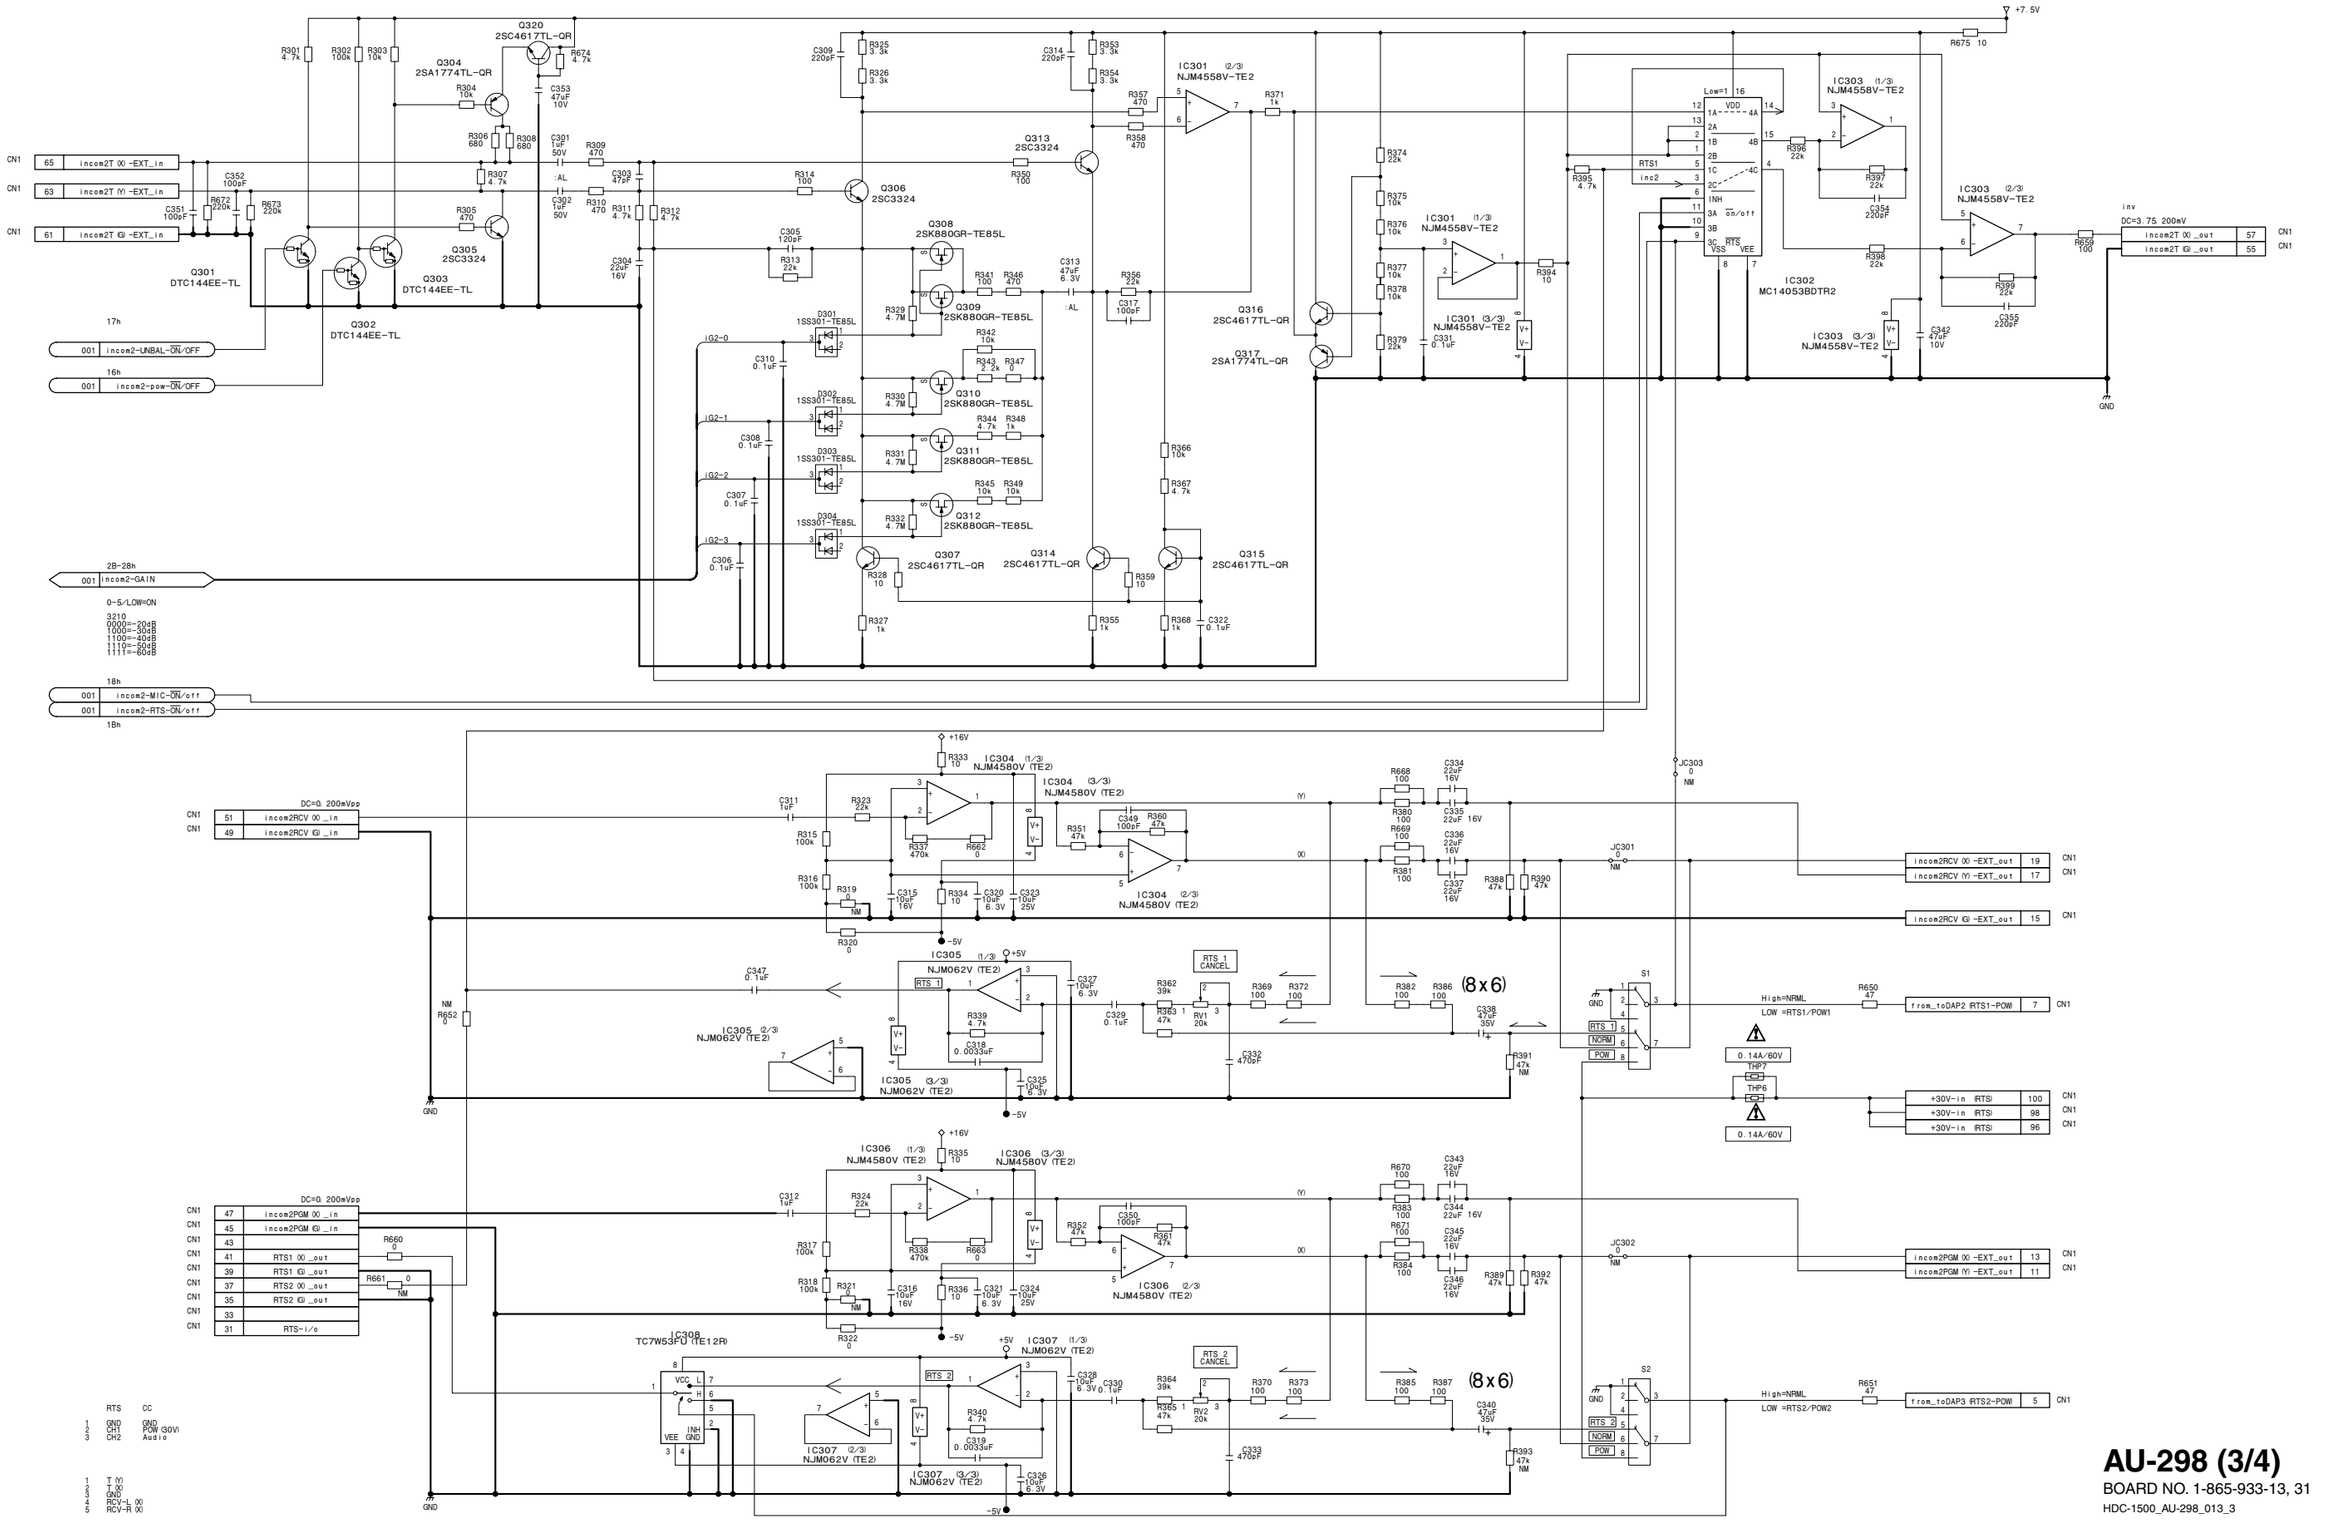




**AU-298 (4/4)**

BOARD NO. 1-865-933-13, 31

HDC-1500_AU-298_013_4

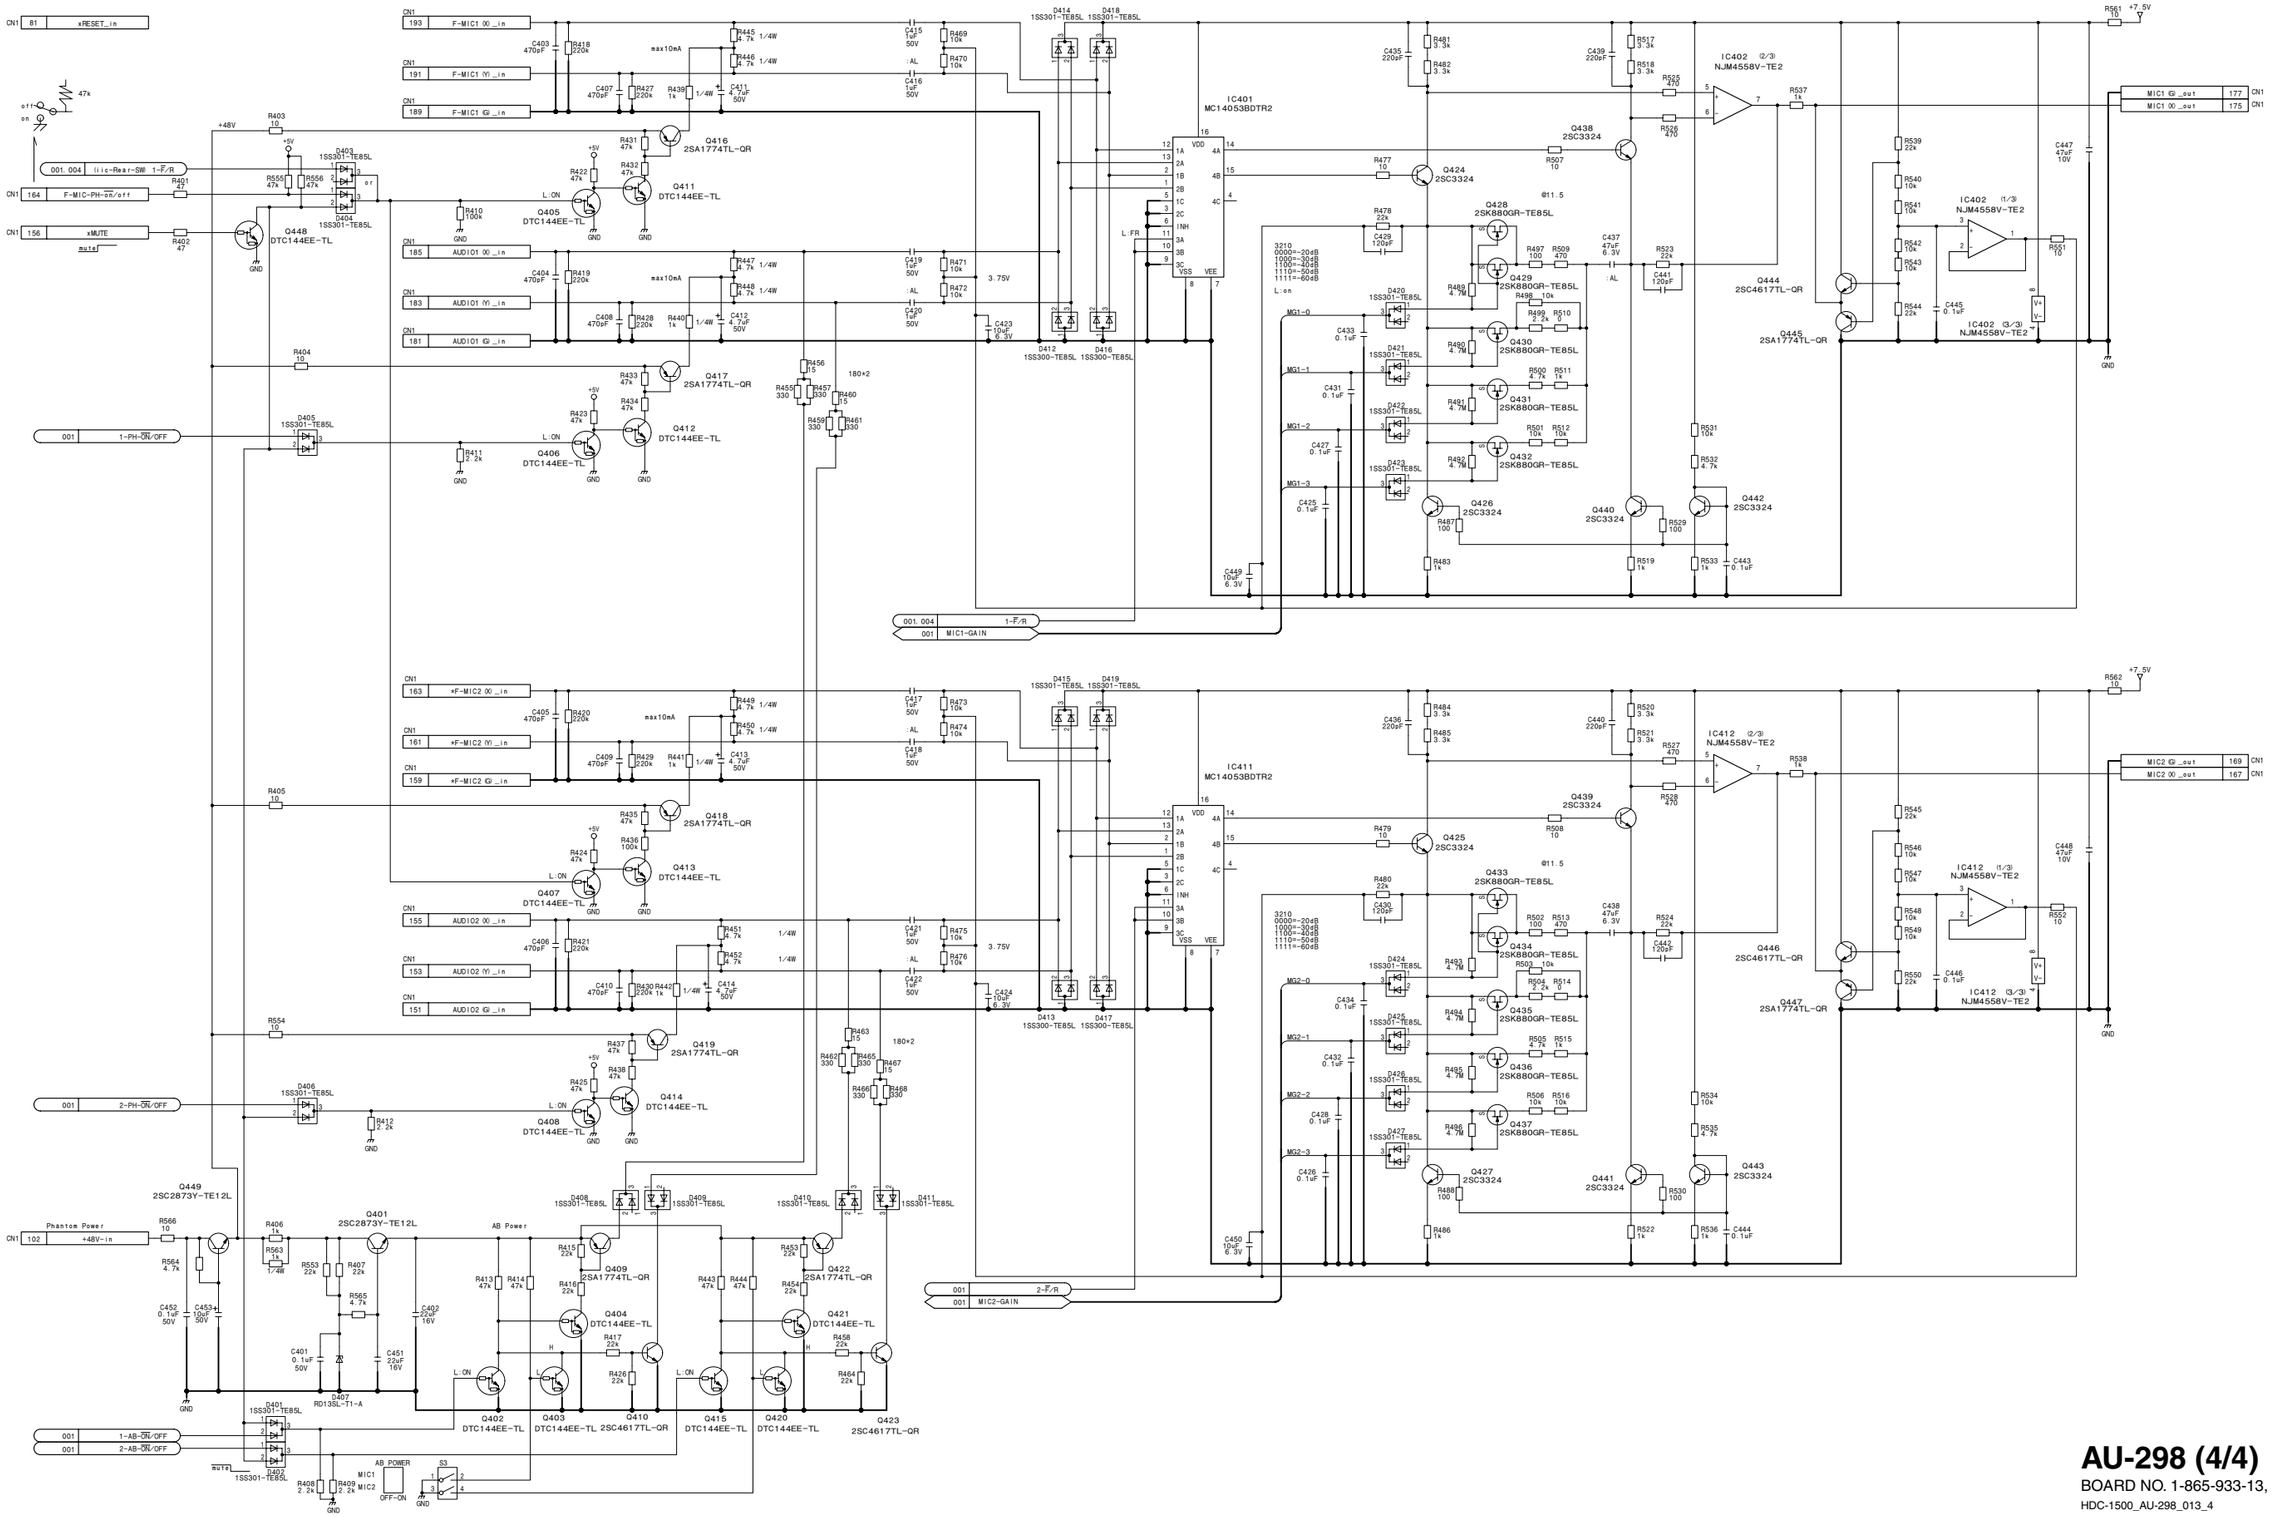


*NOTE

| REF. NO. | SUFFIX -11 | SUFFIX -12 |
|---|---|---|
| C15 | NM | 1uF |
| R35. R36 | NM | 1kΩ |
| R27. R28 | 470Ω | 1kΩ |

**BI-175**
BOARD NO. 1-868-173-11, 12
HDC-1500_BI-175_011_1

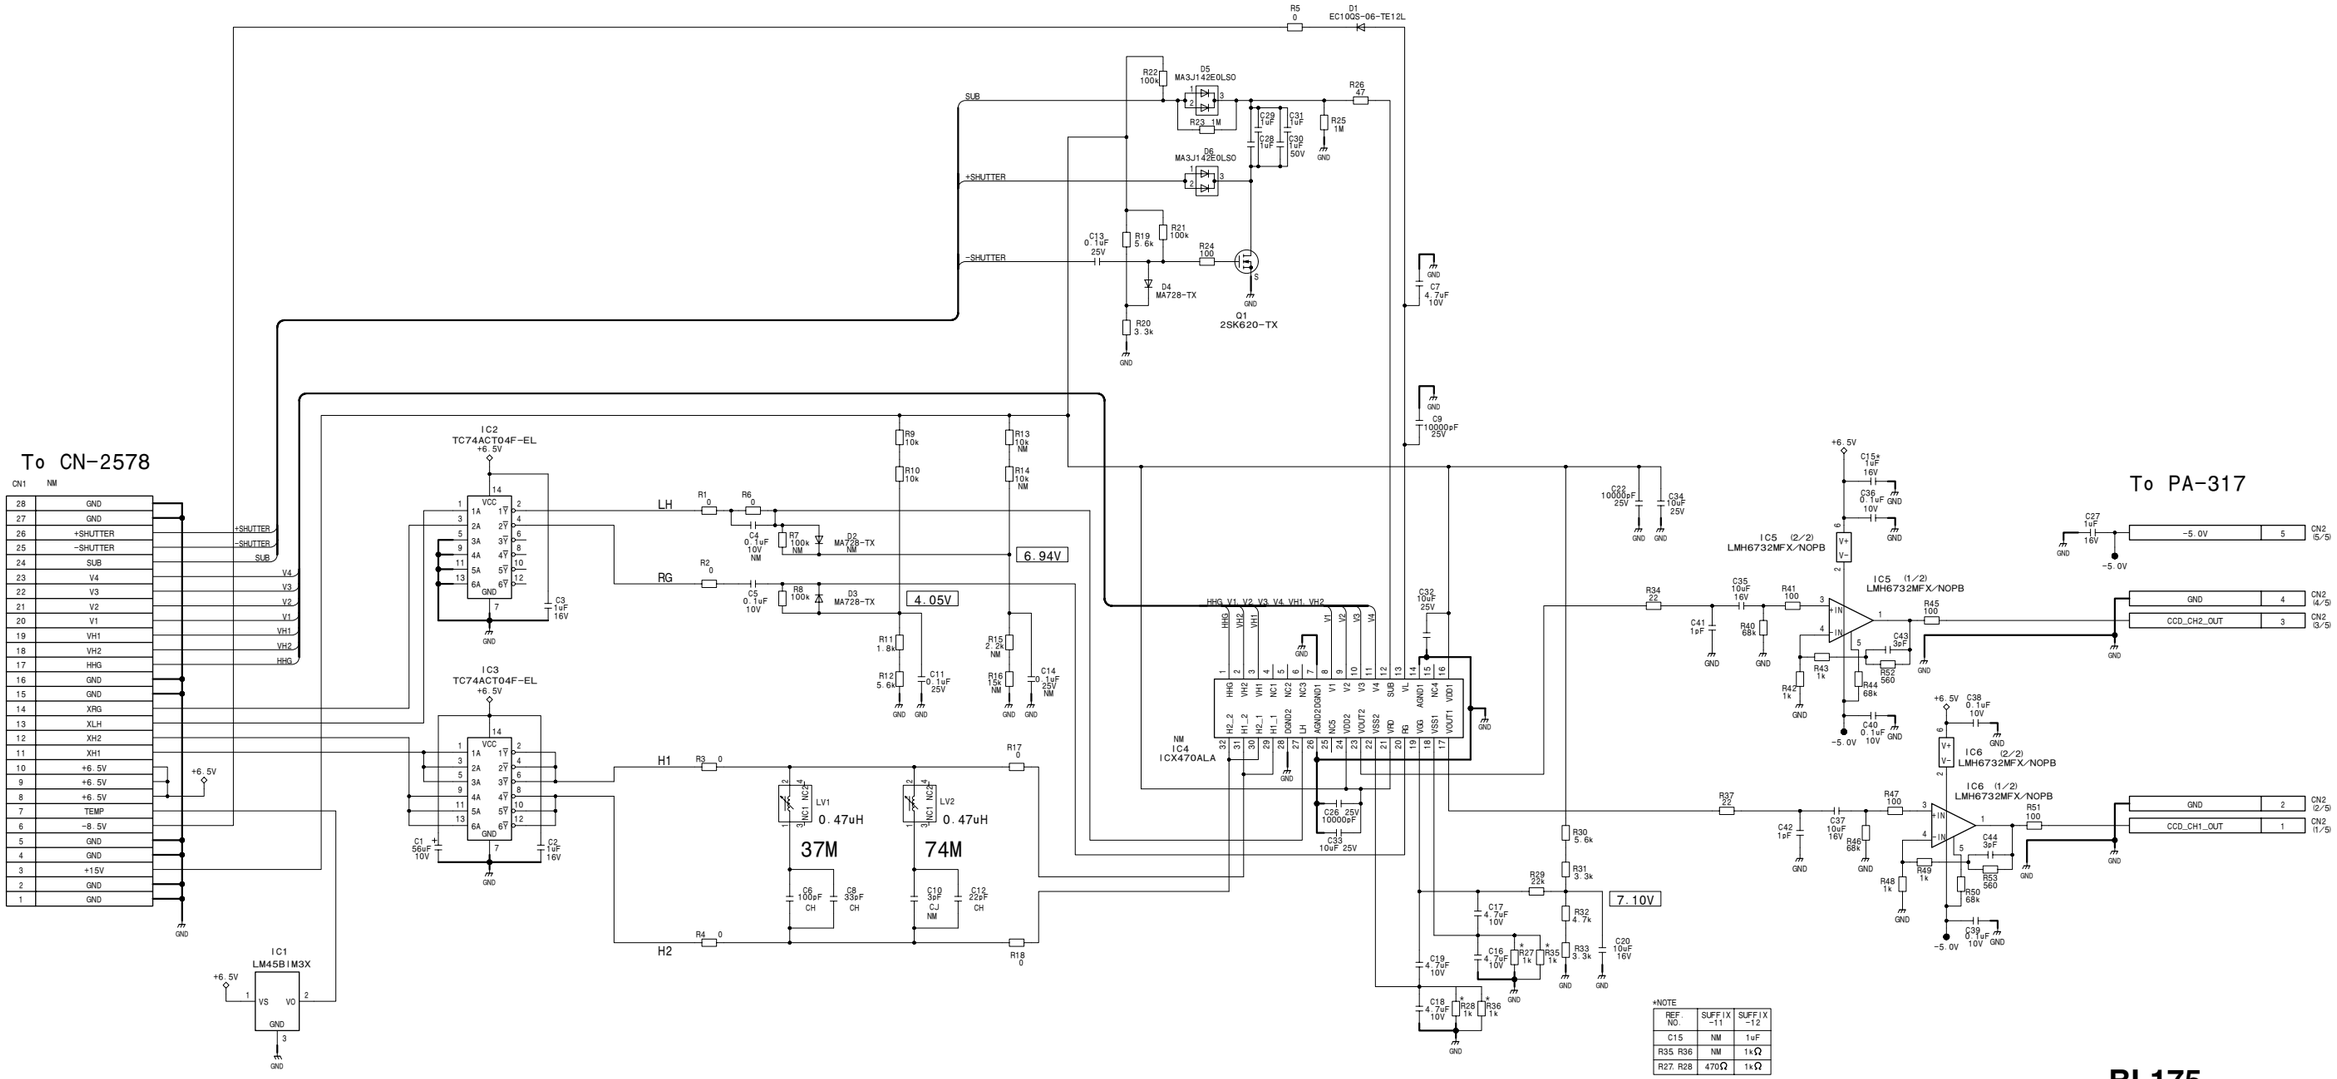


*NOTE

| REF. NO. | SUFF. IX -11 | SUFF. IX -12 |
|---|---|---|
| R40. R41 | NM | 1kΩ |
| R27. R28 | 470Ω | 1kΩ |

**BI-187**
BOARD NO. 1-865-963-11, 12
HDC-1600_BI-187_011_1

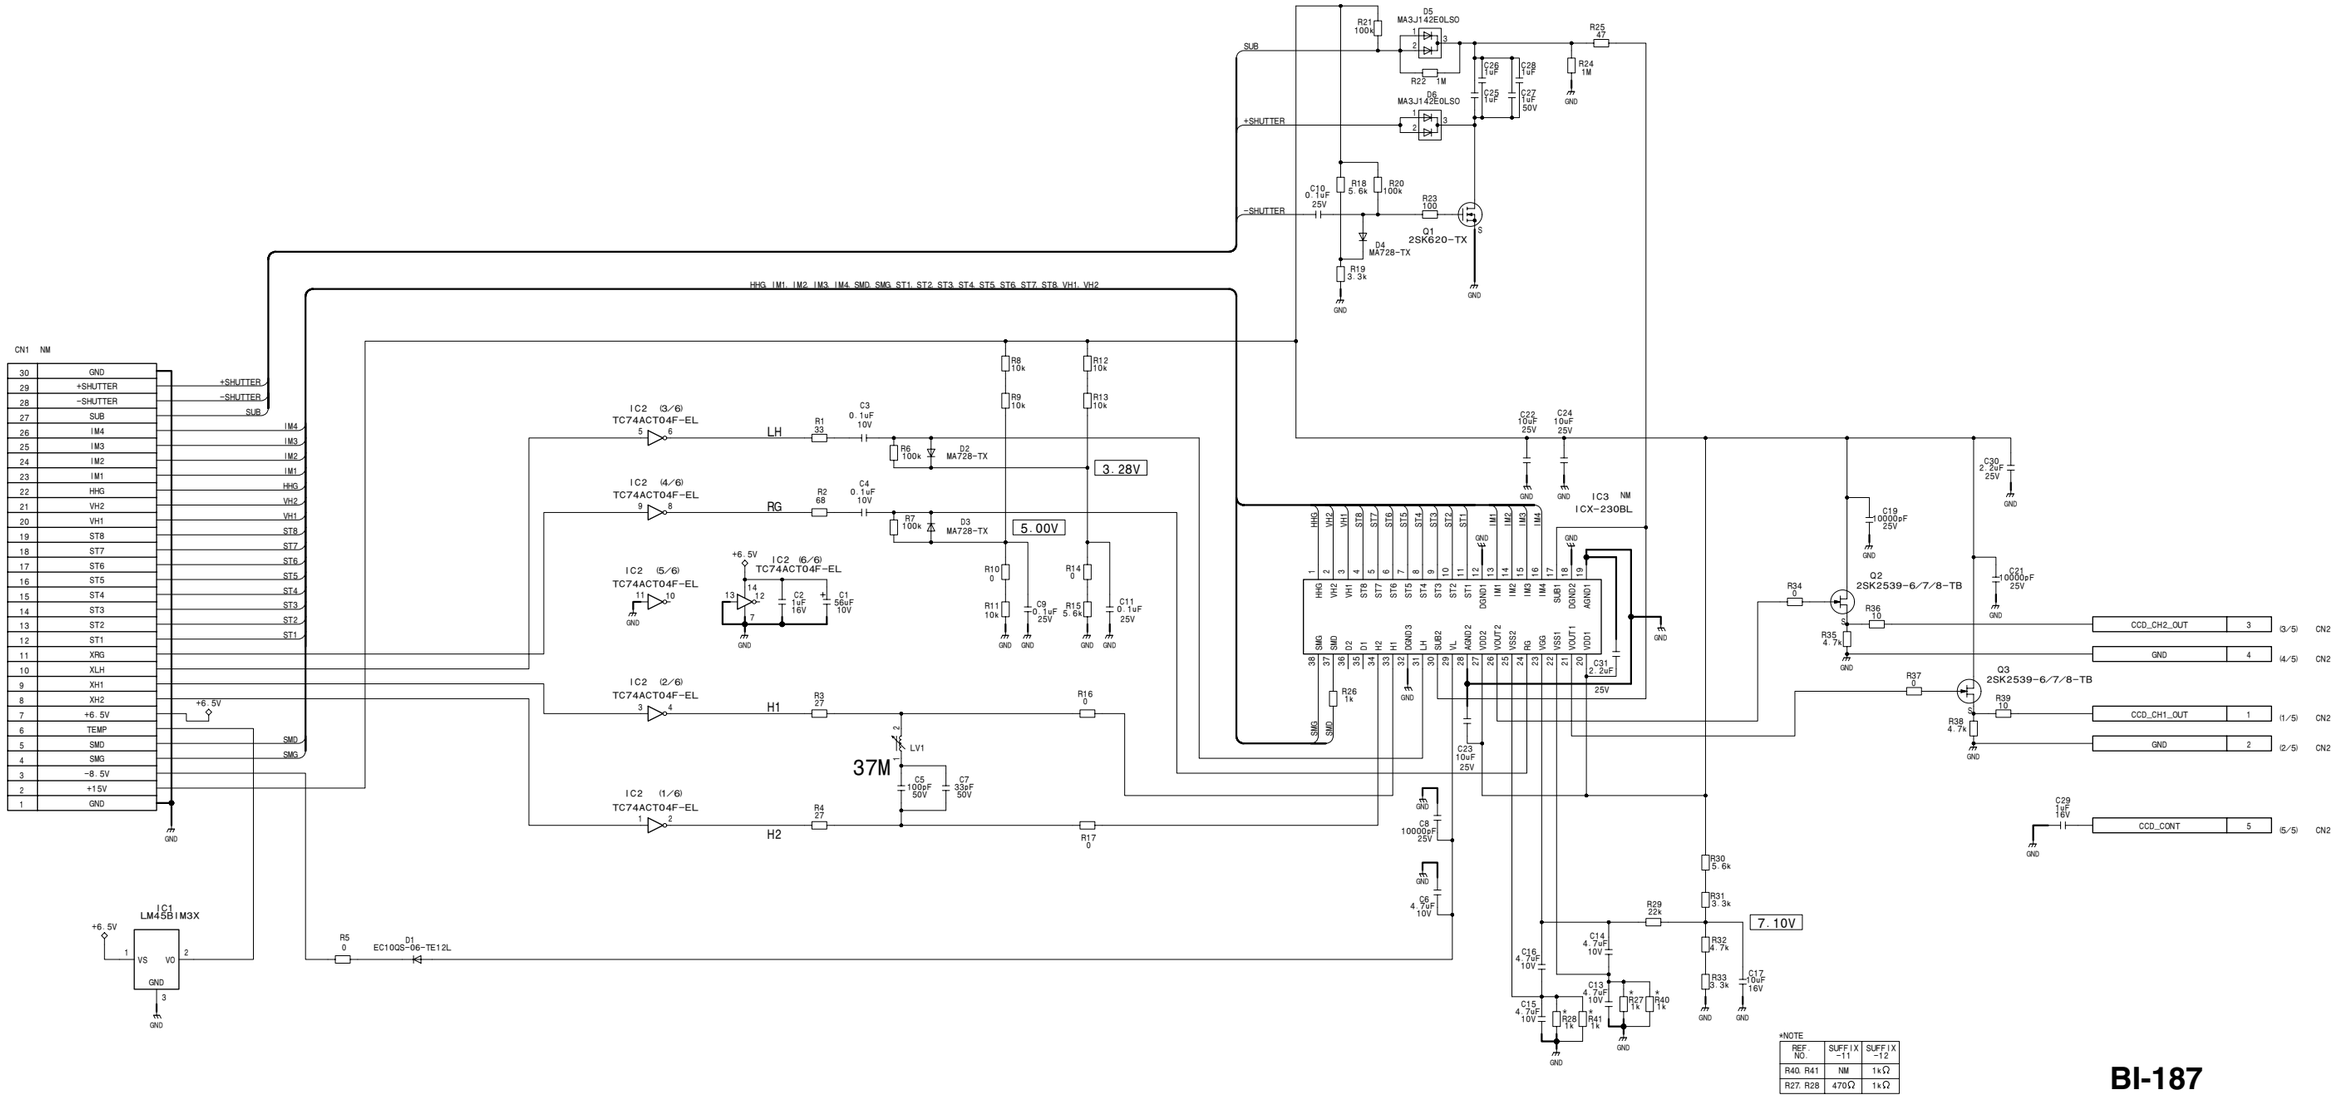


*NOTE

| REF. NO. | SUFFIX −11 | SUFFIX −12 |
|---|---|---|
| R40. R41 | NM | 1kΩ |
| R27. R28 | 470Ω | 1kΩ |

# BI-188

BOARD NO. 1-865-964-11, 12

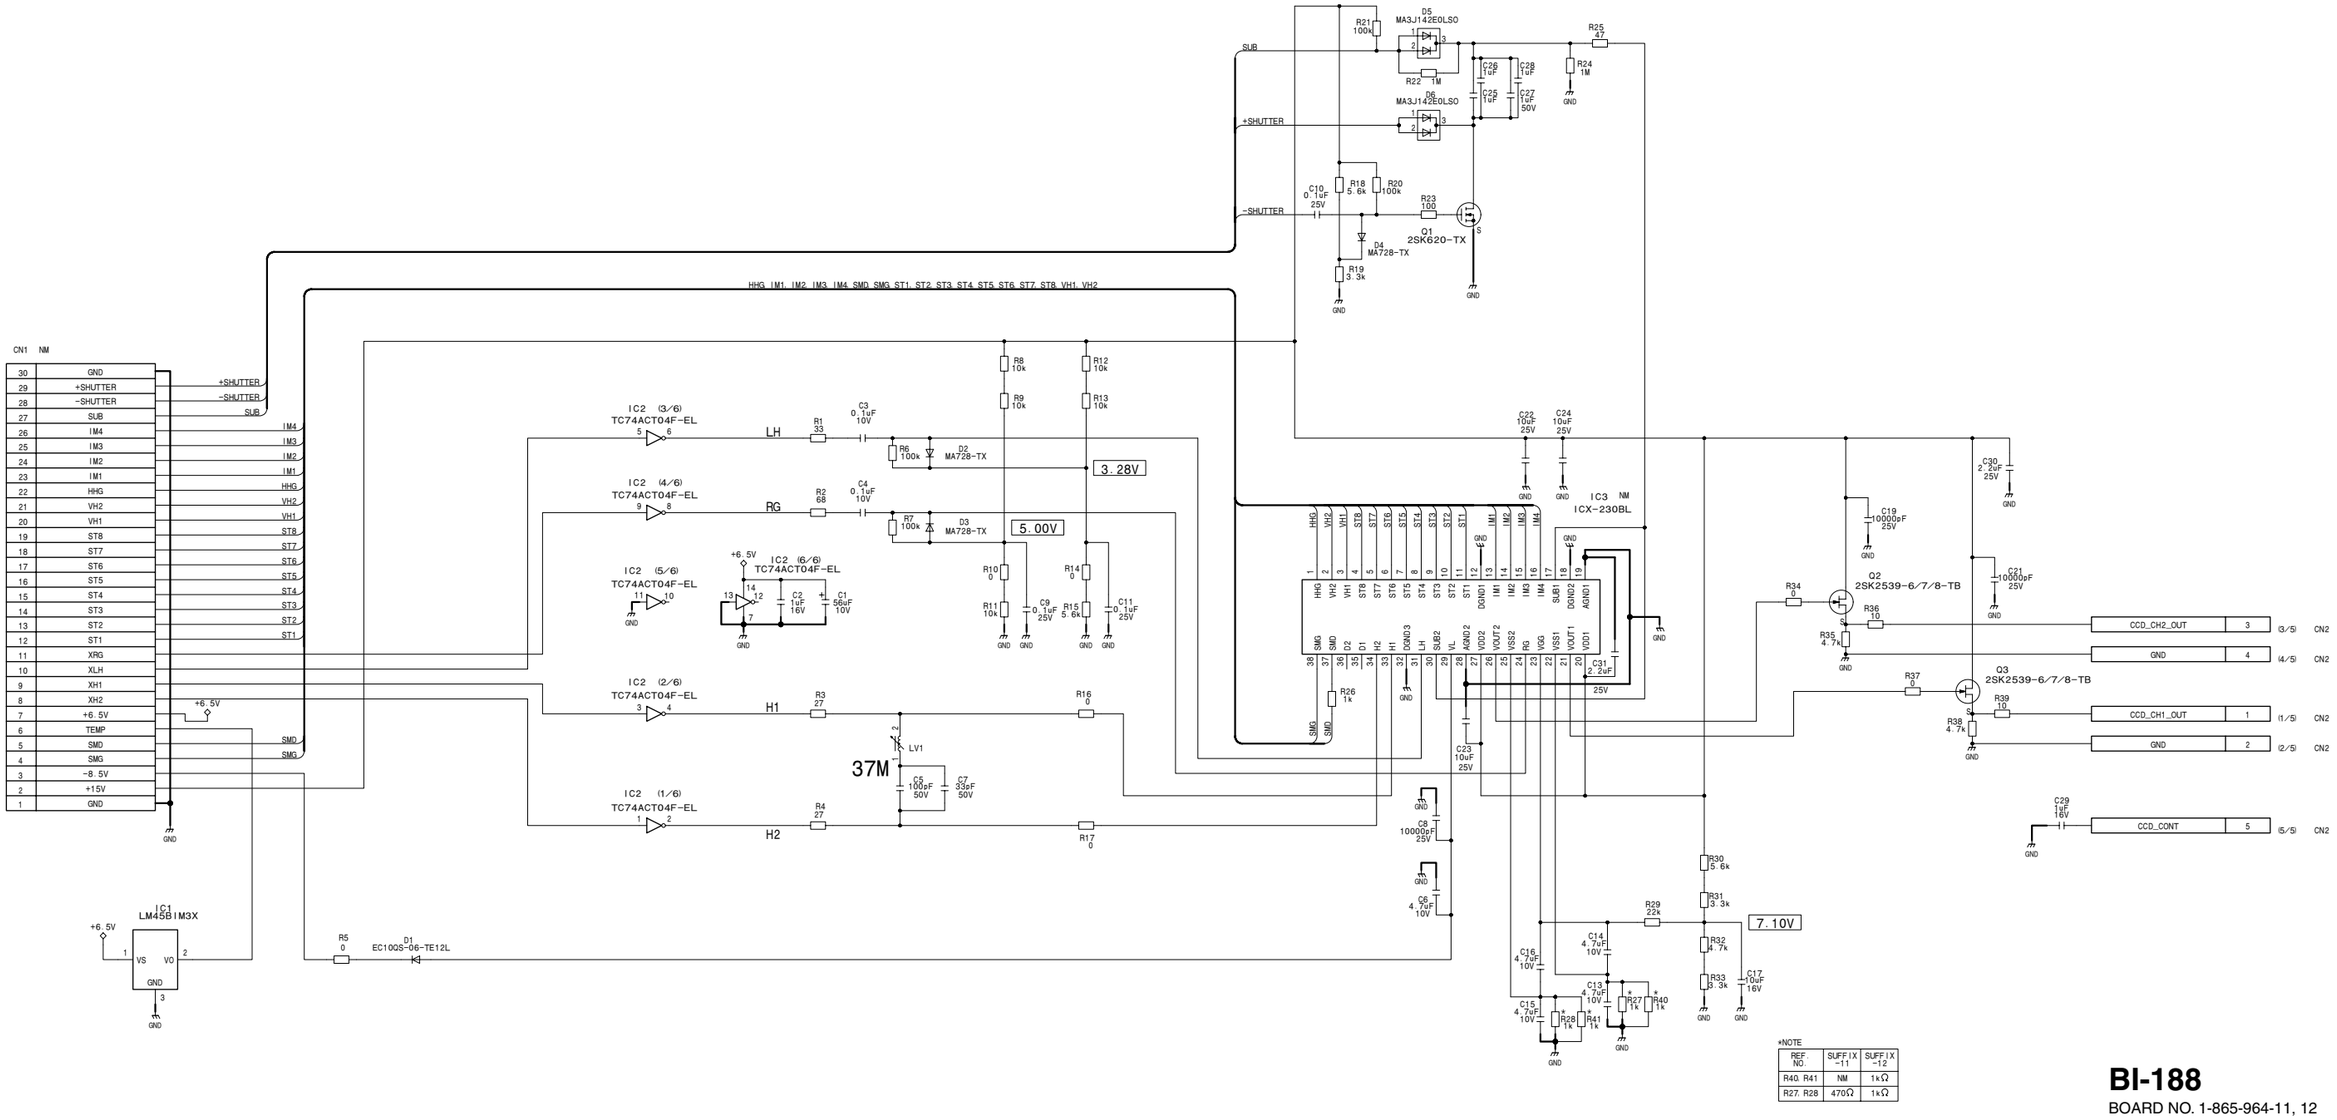HDC-1600_BI-188_011_1




*NOTE

| REF. NO. | SUFFIX −11 | SUFFIX −12 |
|---|---|---|
| R40. R41 | NM | 1kΩ |
| R27. R28 | 470Ω | 1kΩ |

**BI-189**
BOARD NO. 1-865-965-11, 12
HDC-1600_BI-189_011_1

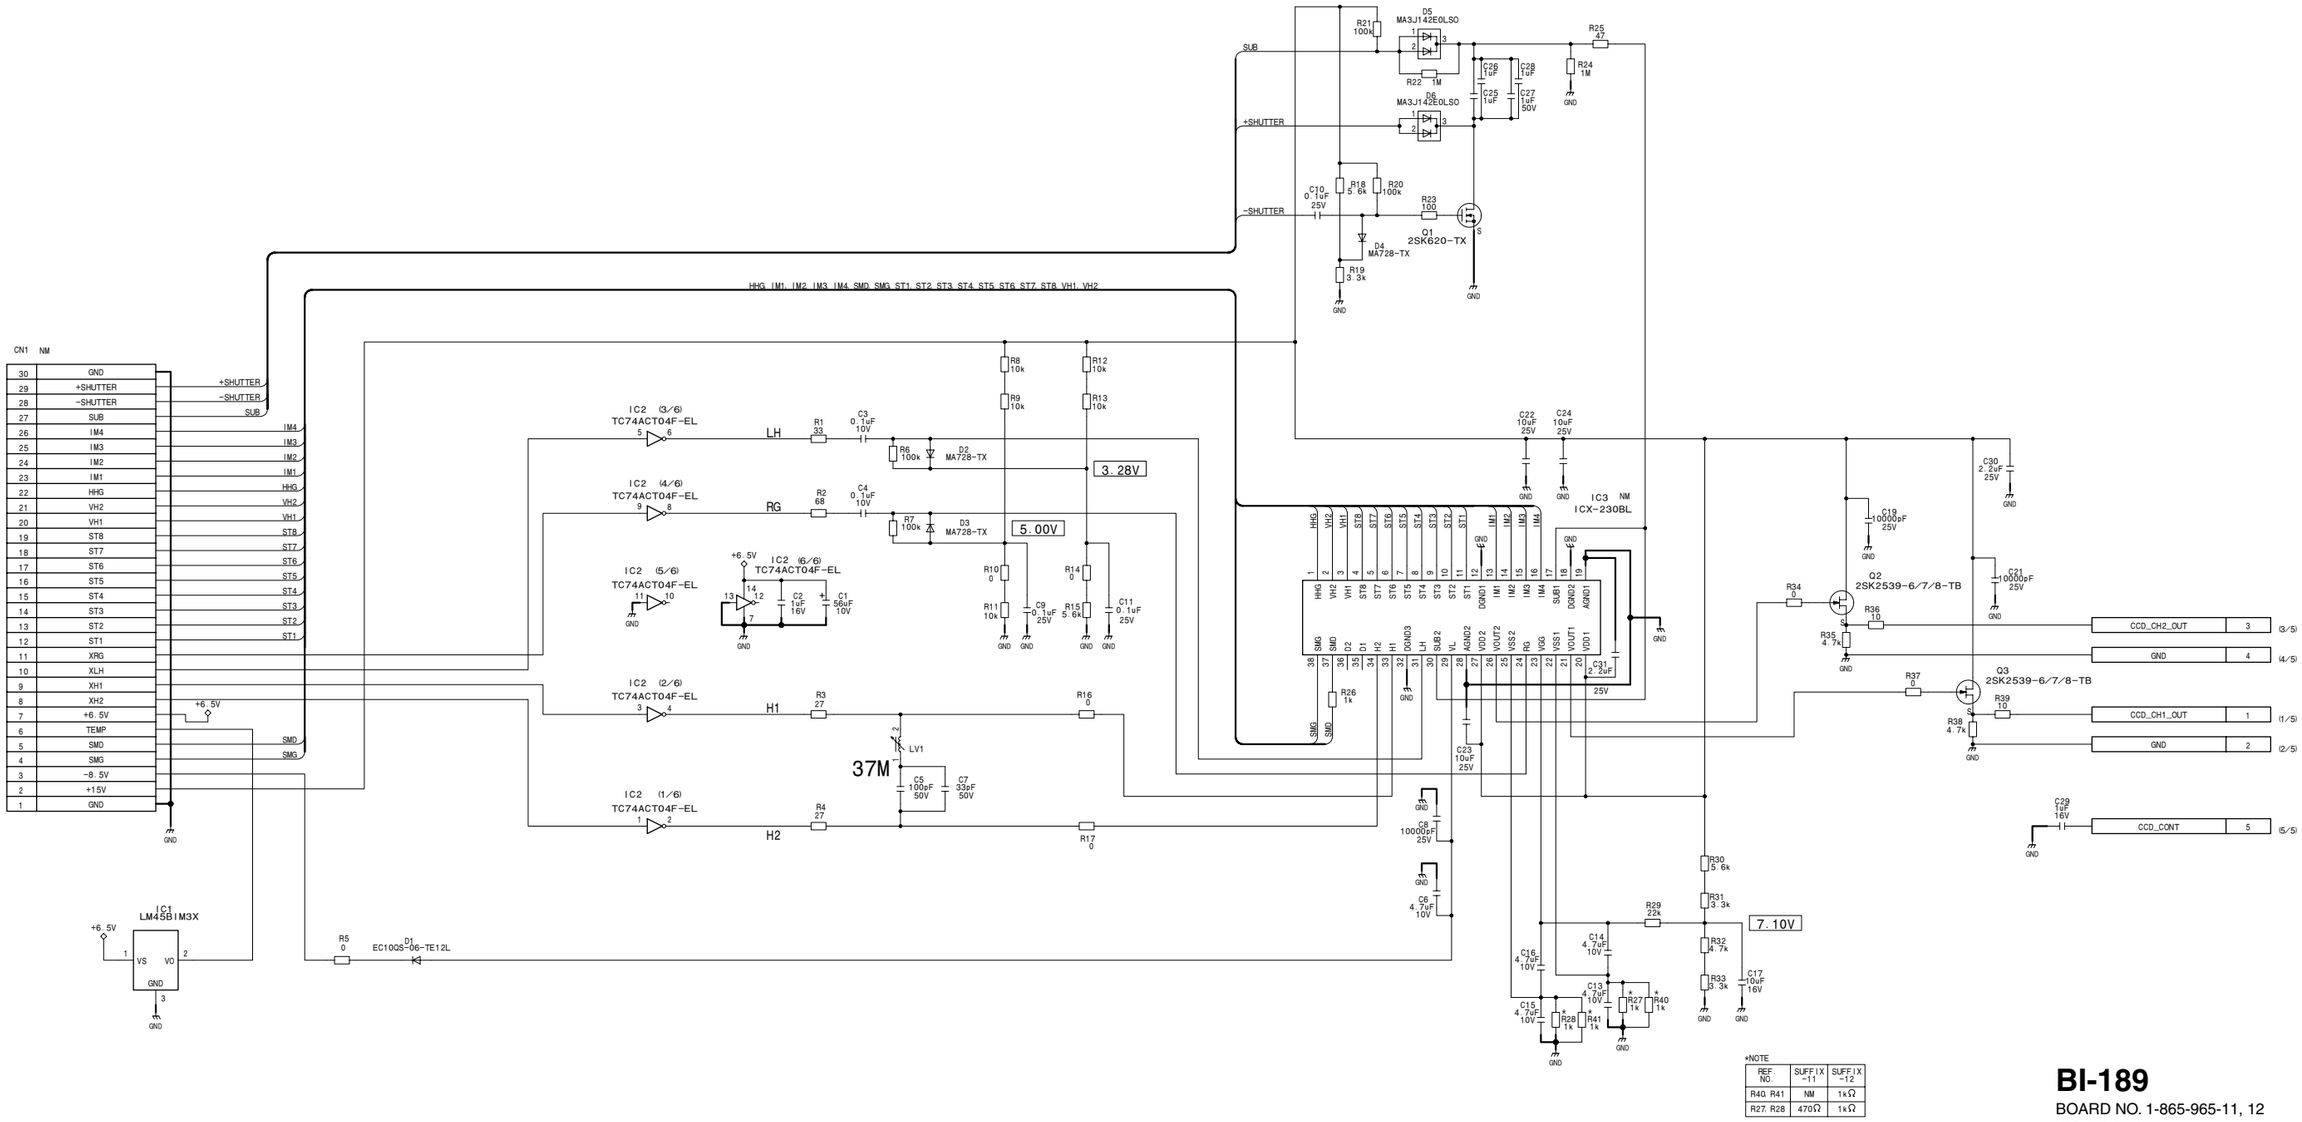


**CN-2578**
BOARD NO. 1-865-974-13
HDC-1500_CN-2578_013_1




**CN-2579**
BOARD NO. 1-865-975-12, 21, 22
HDC-1500_CN-2579_012_1

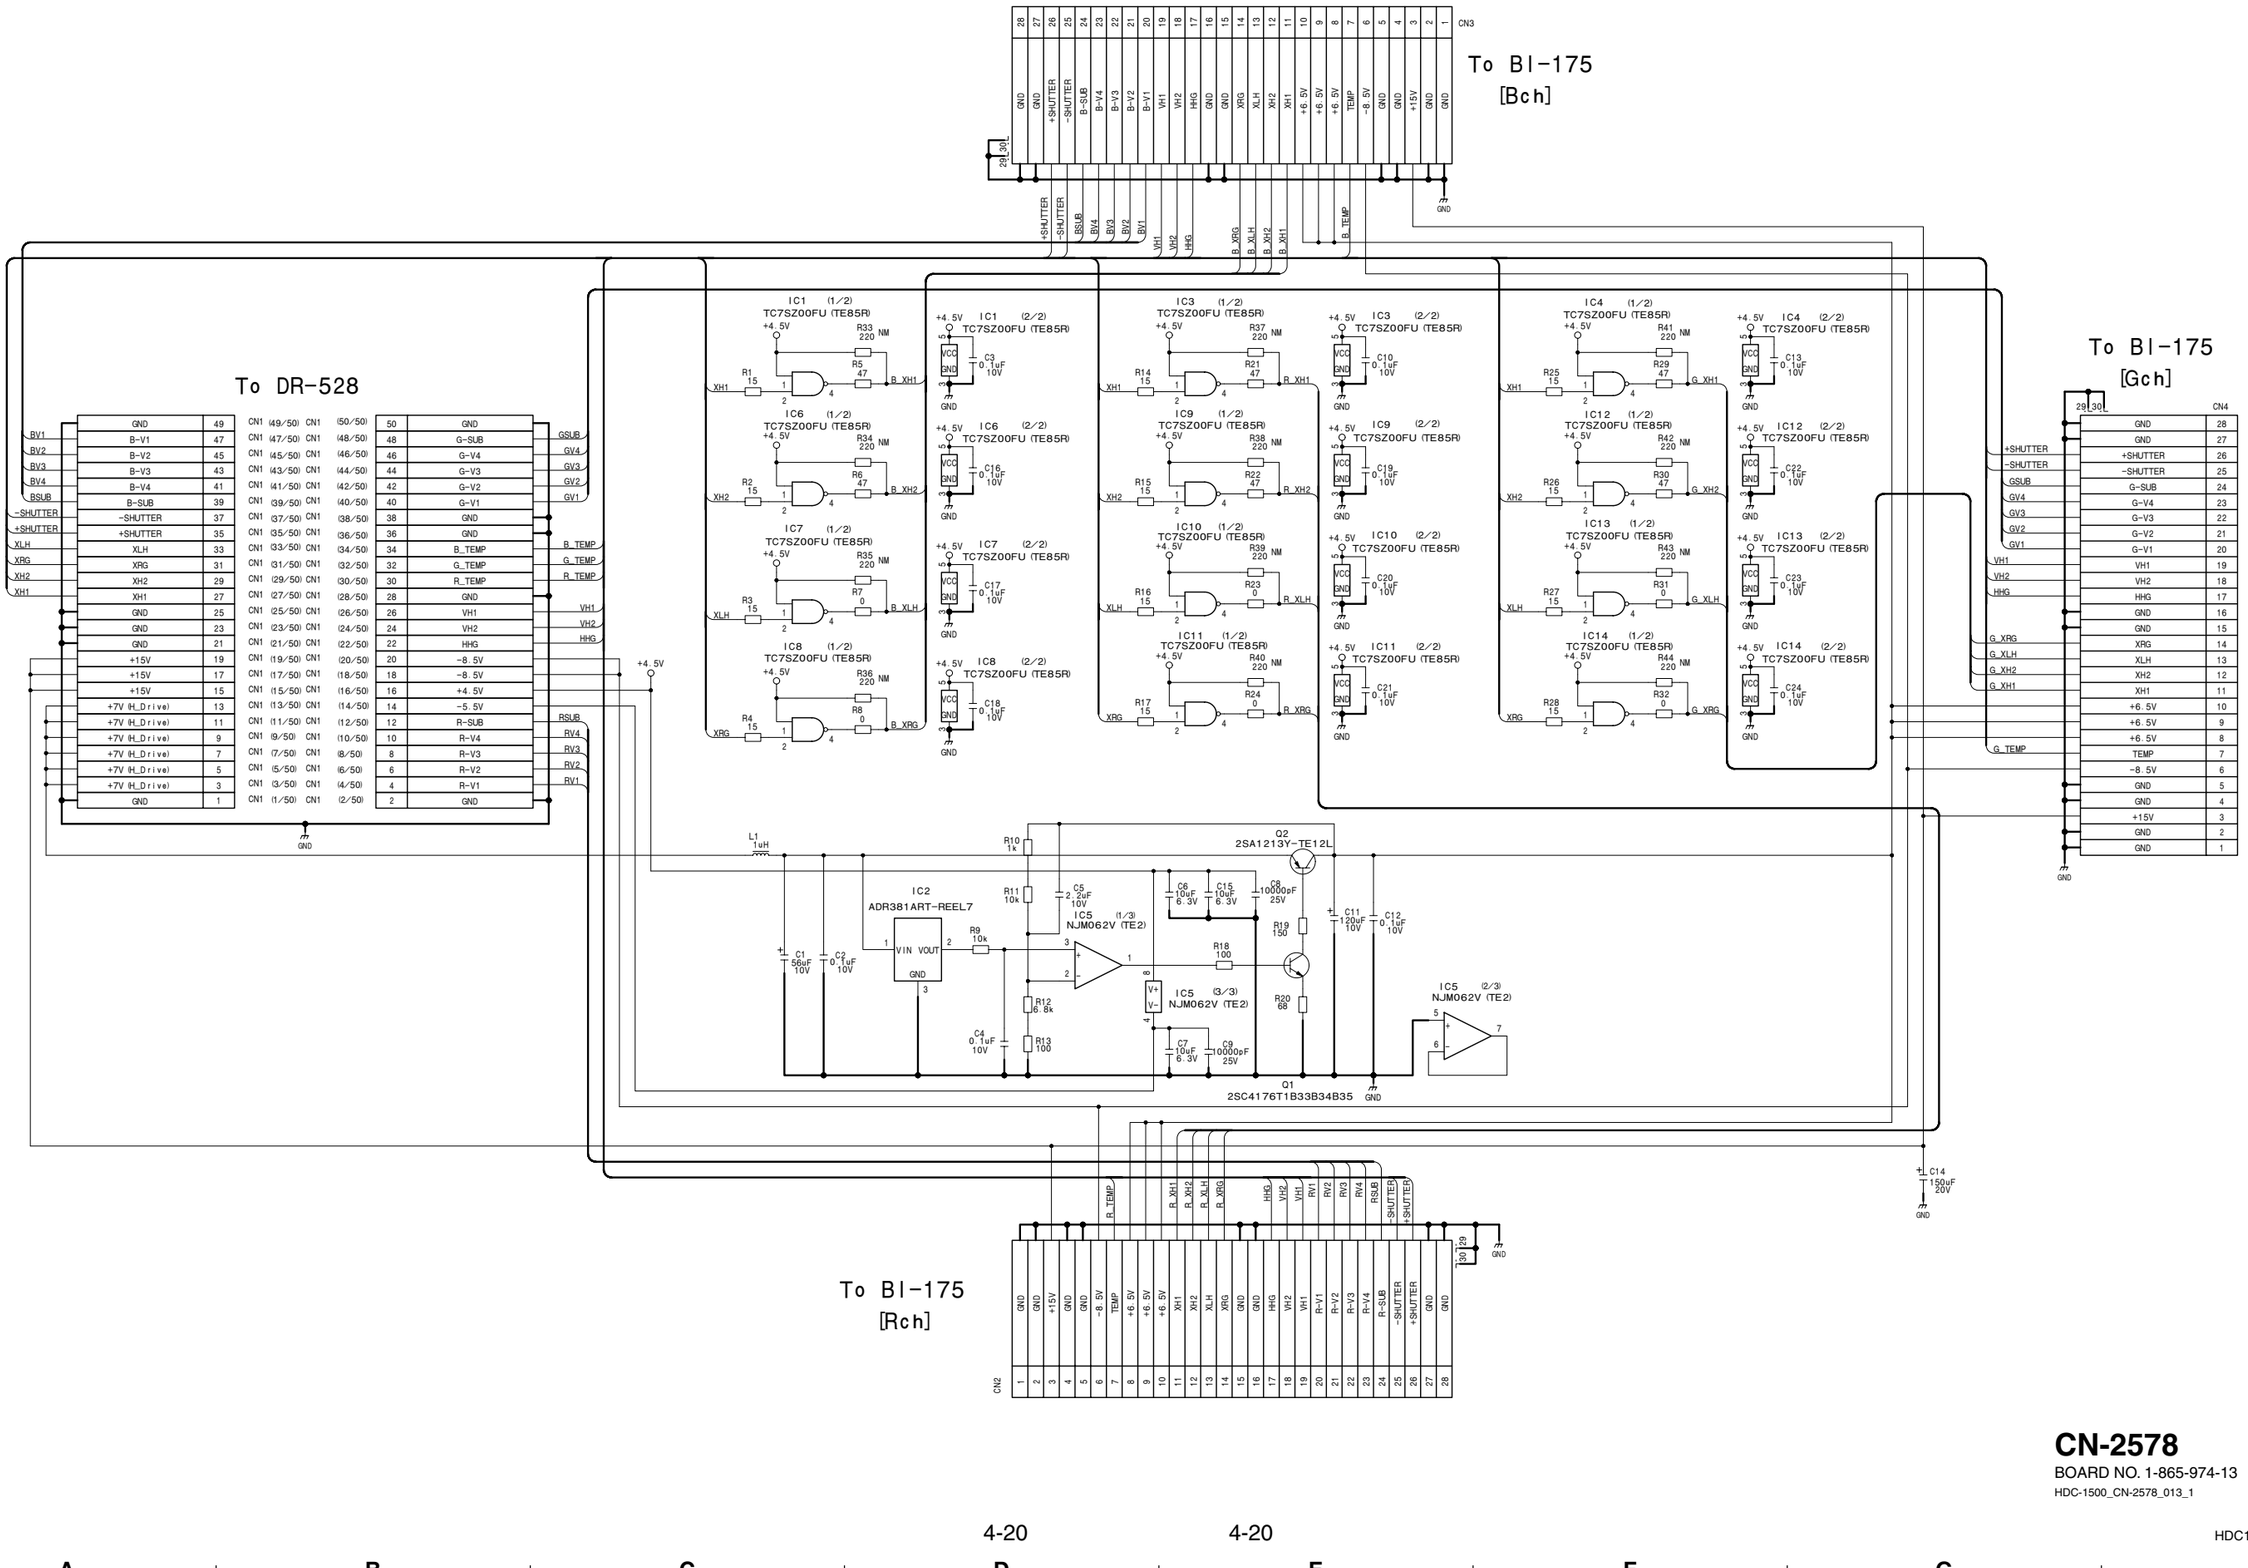


## CN-2602

BOARD NO. 1-867-467-11, 31

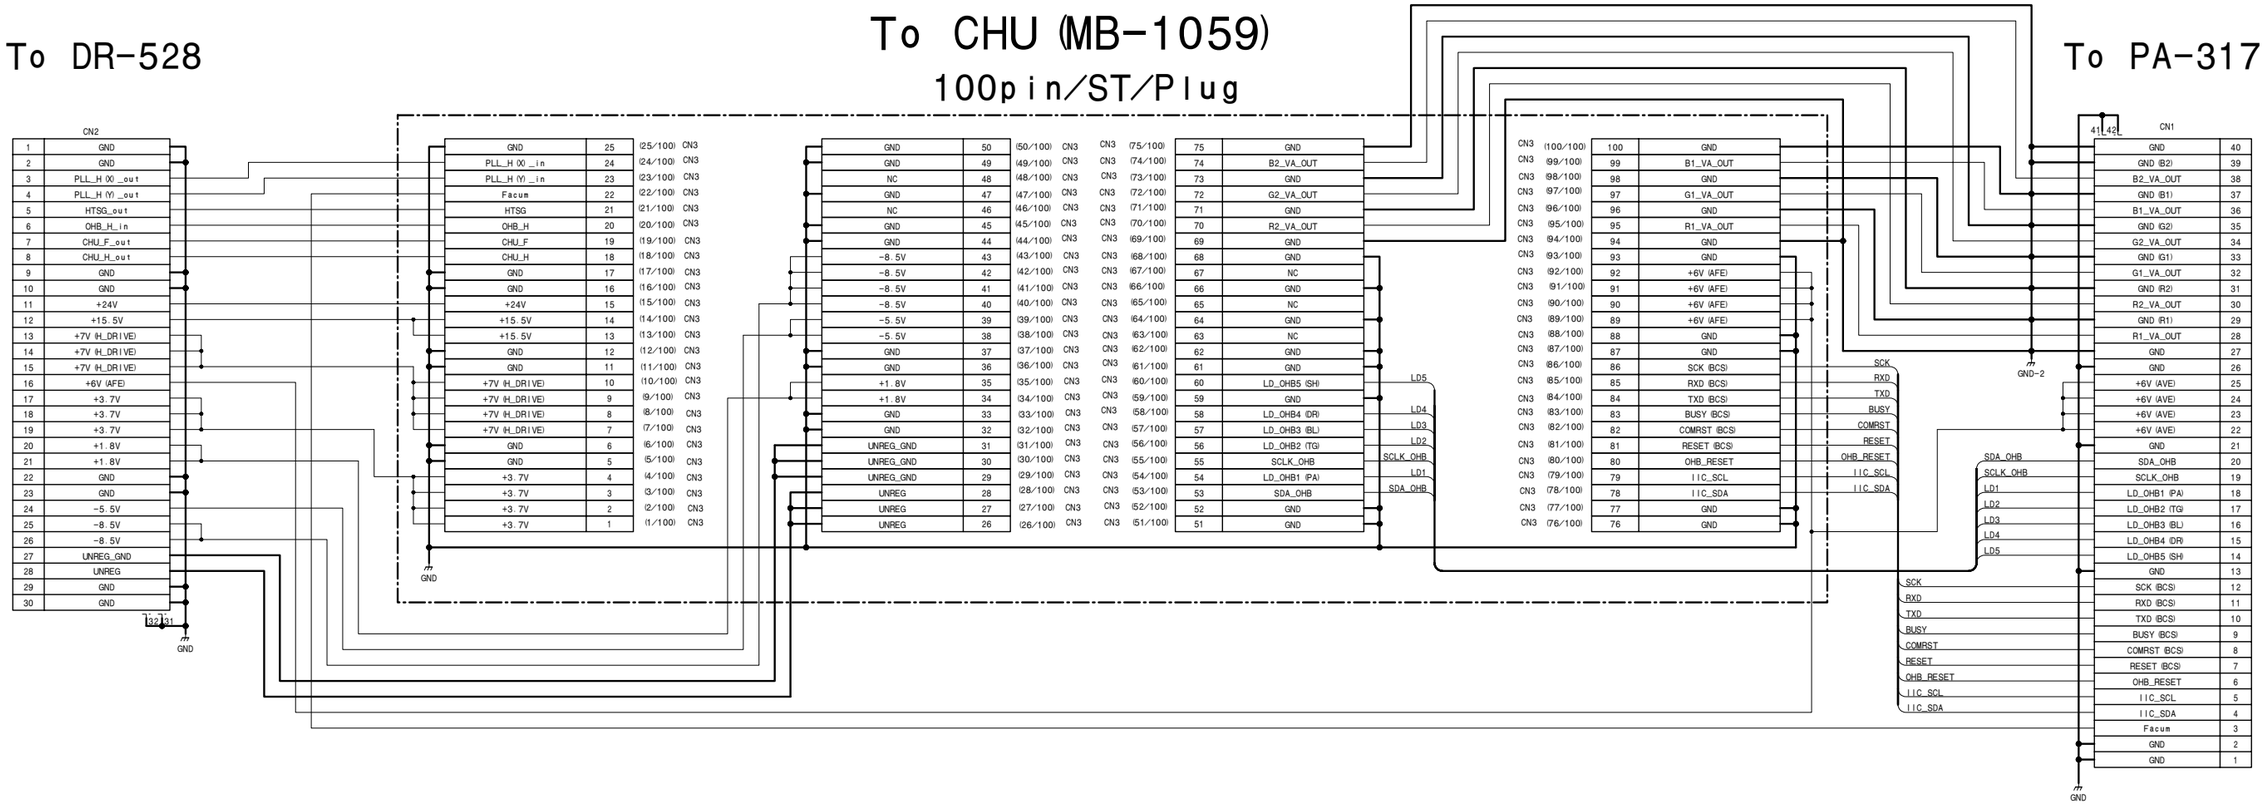HDC-1000_CN-2602_011_1

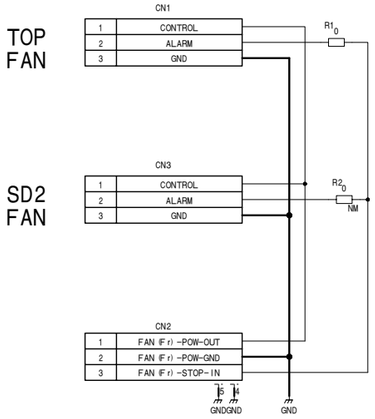


*NOTE

| REF. NO. | CN-2063 | CN-2603B |
|---|---|---|
| JC1 | NM | MT |
| R7 | MT | NM |
| R8 | MT | NM |
| R9 | NM | MT |
| R10 | MT | NM |
| RV1 | MT | NM |
| S3 | MT | NM |
| S4 | MT | NM |

## CN-2603/2603B

BOARD NO. 1-867-456-11, 12, 31

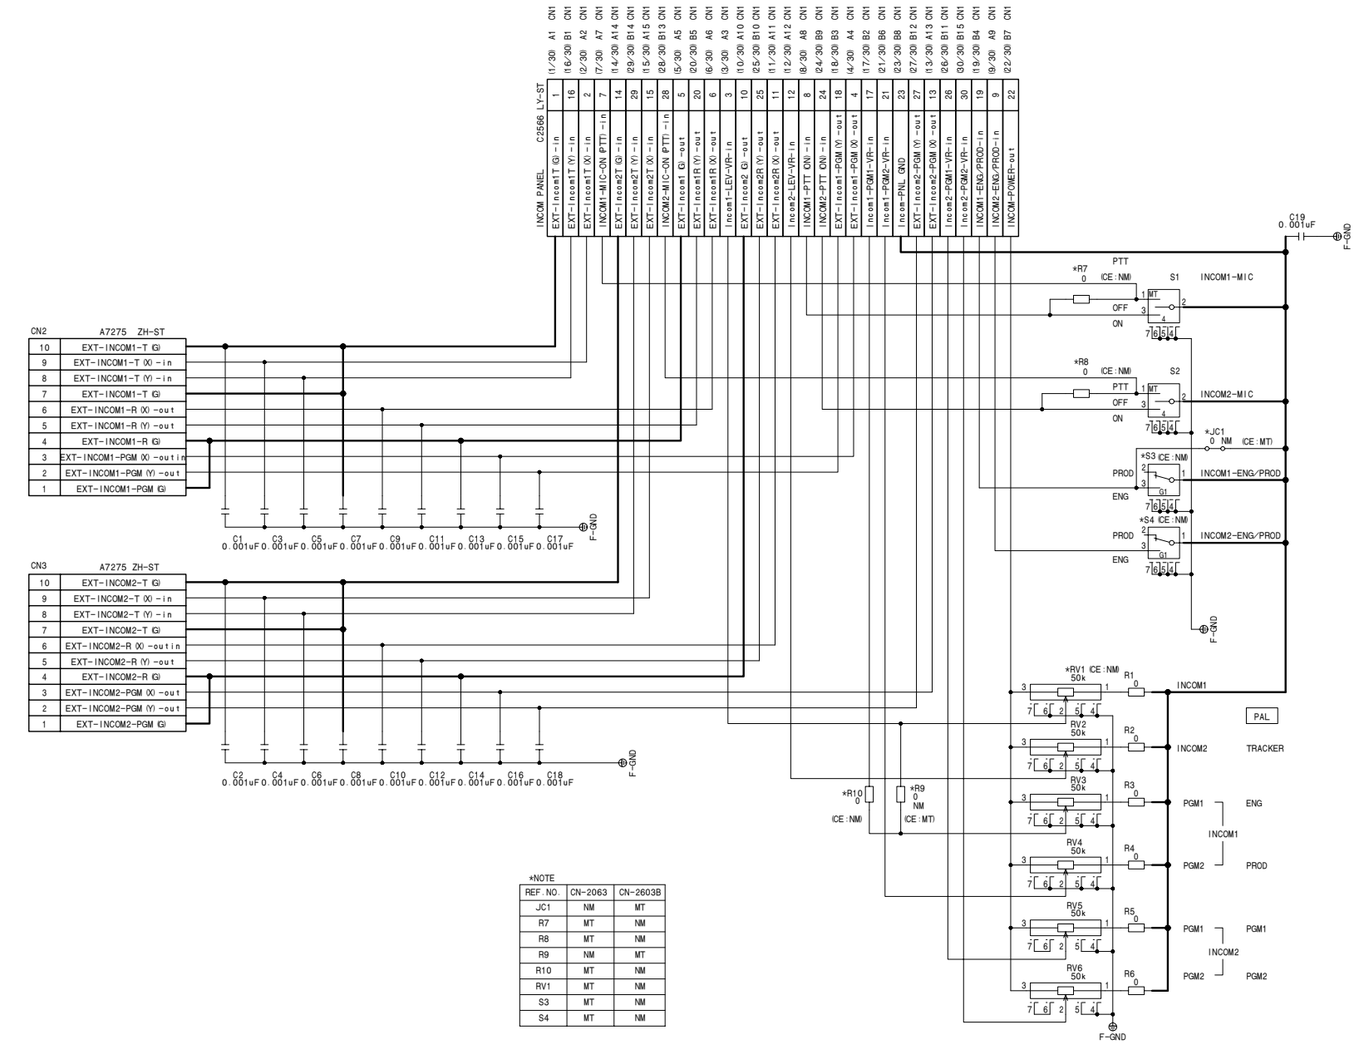HDC-1000_CN-2603_012_1




## CN-2604

BOARD NO. 1-867-457-11, 12, 31

HDC-1000_CN-2604_012_1

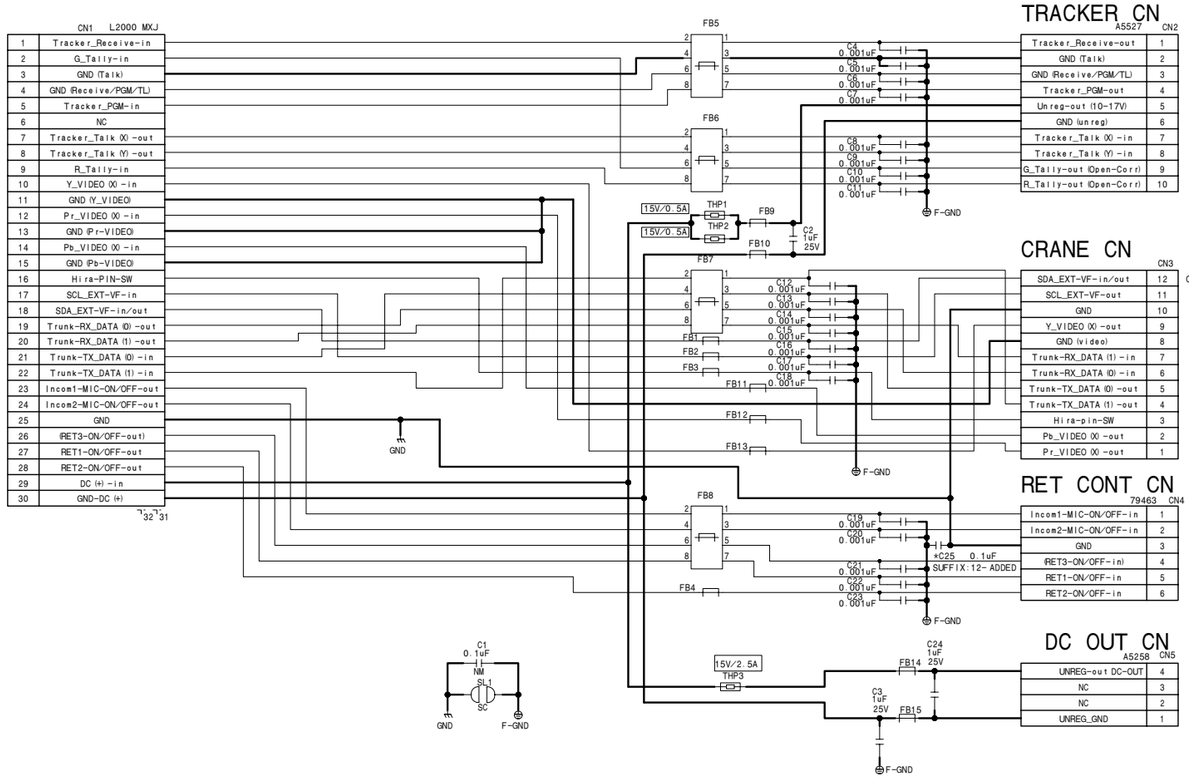


## CN-2605

BOARD NO. 1-867-458-11, 31

HDC-1000_CN-2605_011_1

**CN-2606, CN-2607, CN-2608**
**SUFFIX: -11, 31 SUFFIX: -11, 31 SUFFIX: -11, 31**

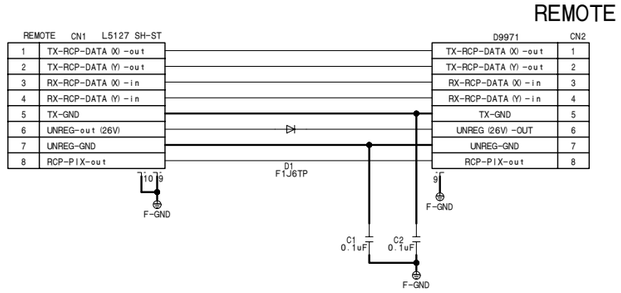


## CN-2606

BOARD NO. 1-867-459-11, 31

HDC-1000_CN-2606_011_1

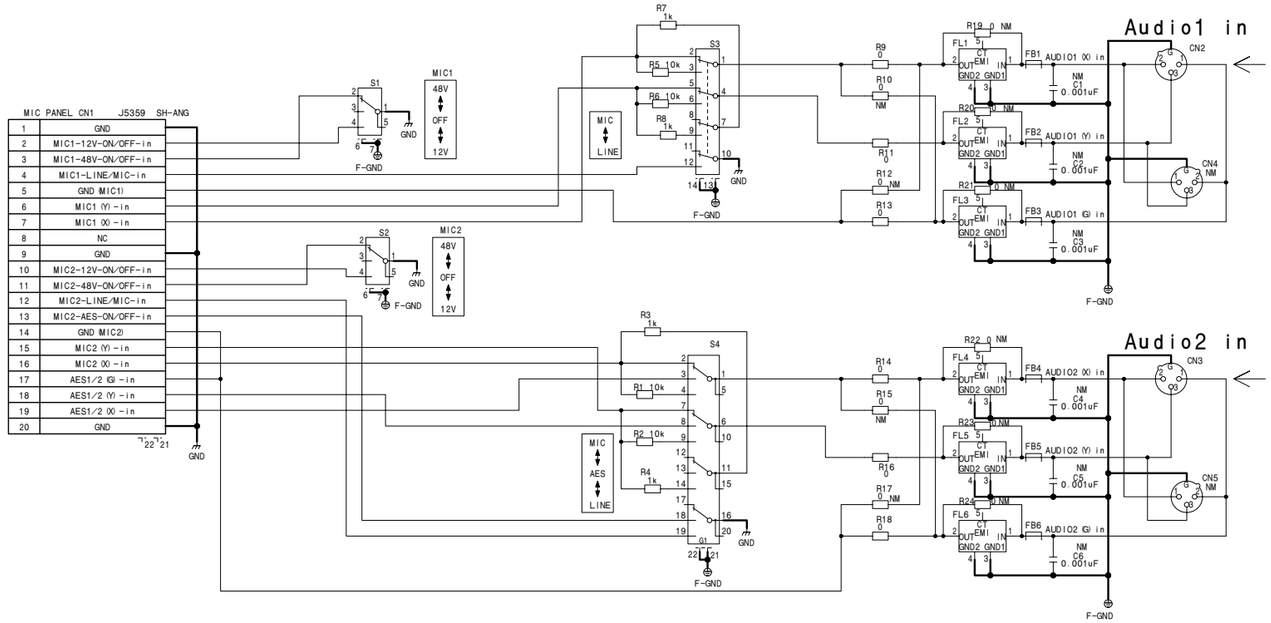


## CN-2607

BOARD NO. 1-867-460-11, 31

HDC-1000_CN-2607_011_1

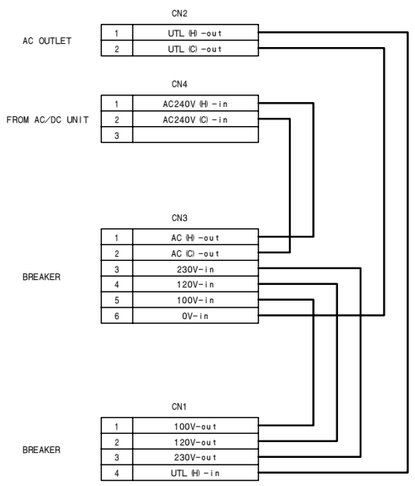


## CN-2608

BOARD NO. 1-867-408-11, 31

HDC-1000_CN-2608_011_1

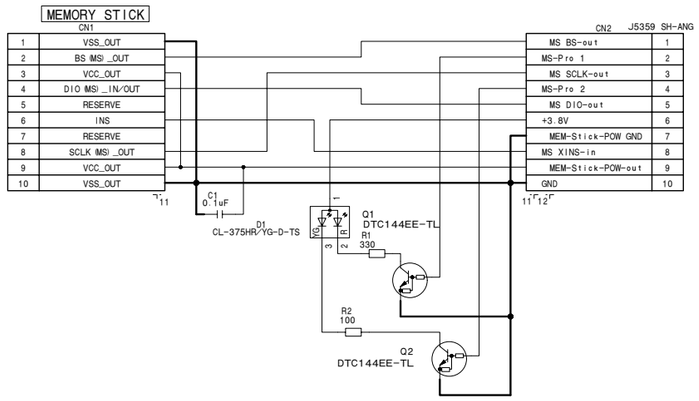

4-24

OHB_100P (F) -CN (0-195-434-01)




## CN-2609

BOARD NO. 1-867-409-11, 21, 31

HDC-1000_CN-2609_011_1

VF-CN

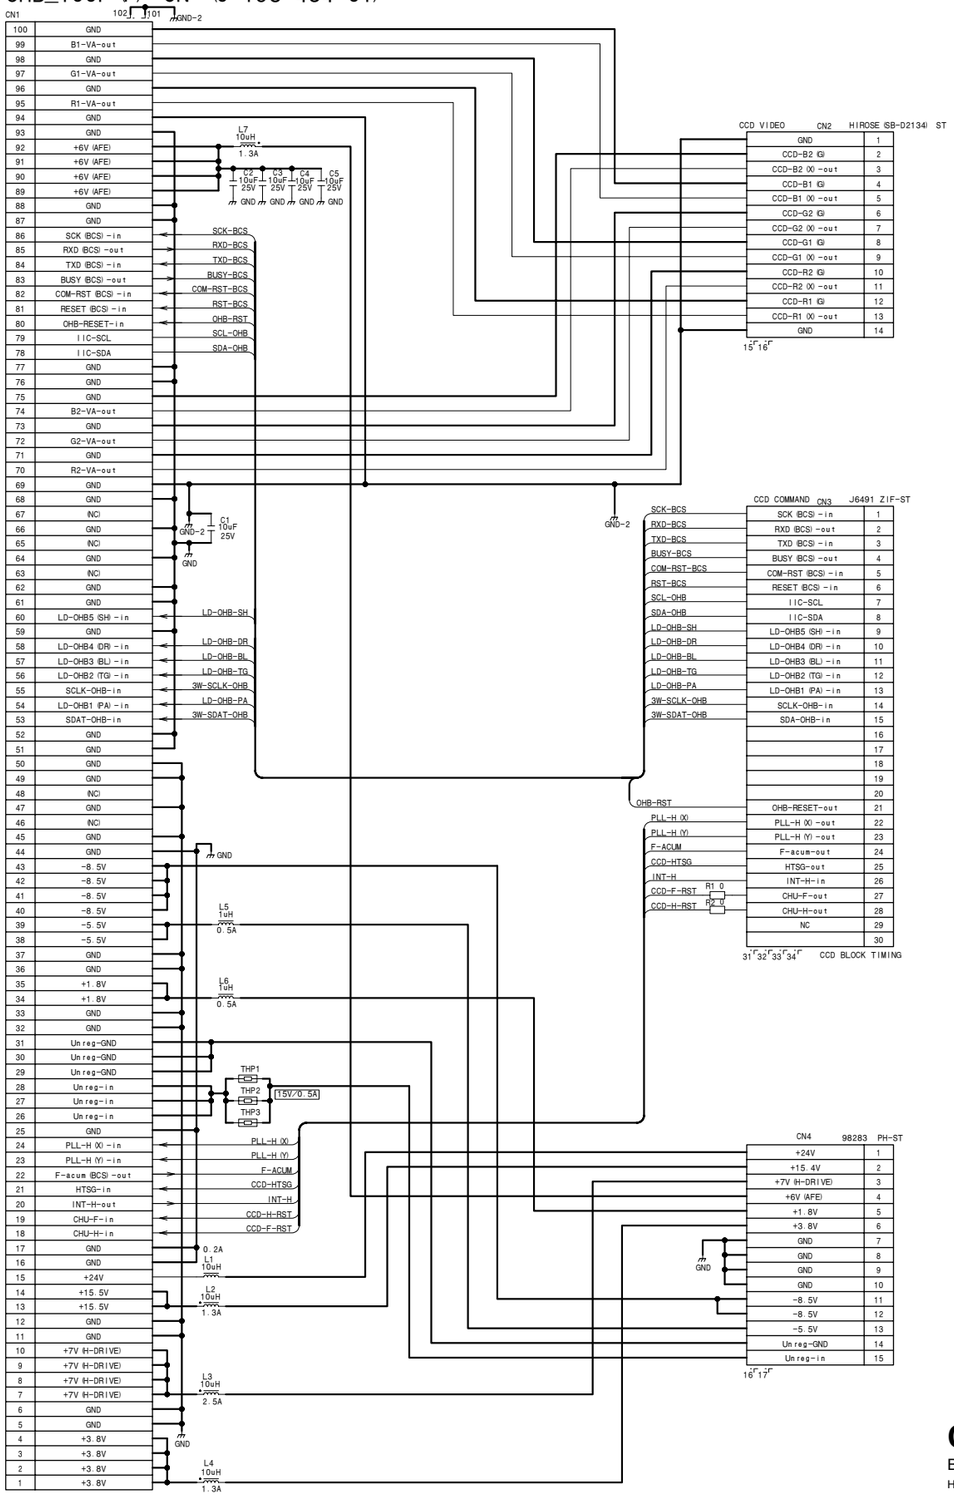


## CN-2614/2614B

BOARD NO. 1-869-827-11
1-865-935-12, 31

HDC-1500_CN-2614_001_1

CN-2615, CN-2616
SUFFIX: -12, 13, 31

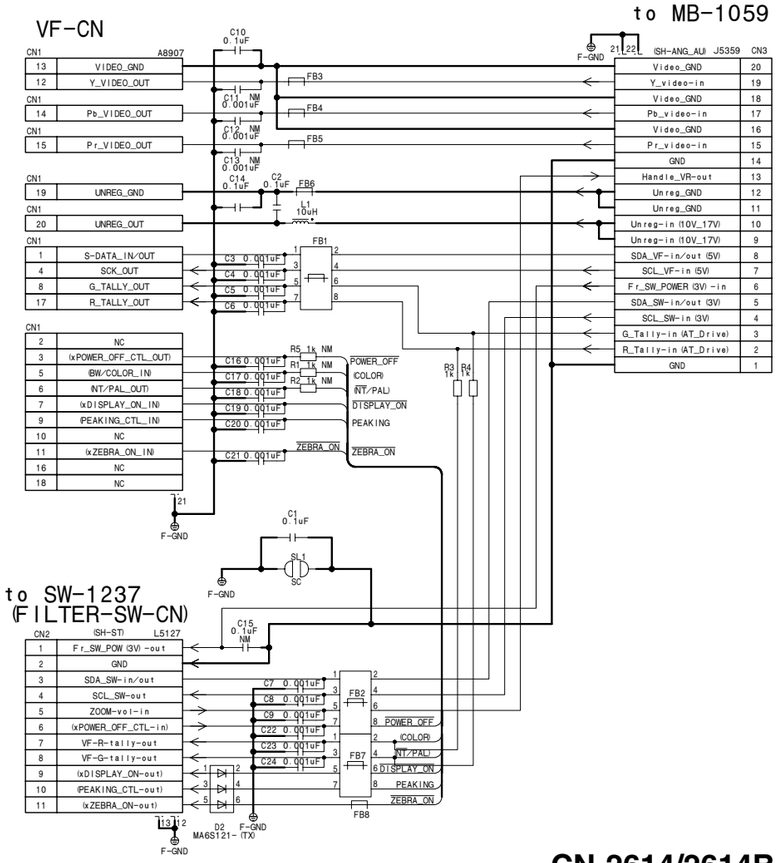


## CN-2615

BOARD NO. 1-865-936-12

HDC-1500_CN-2615_001_1

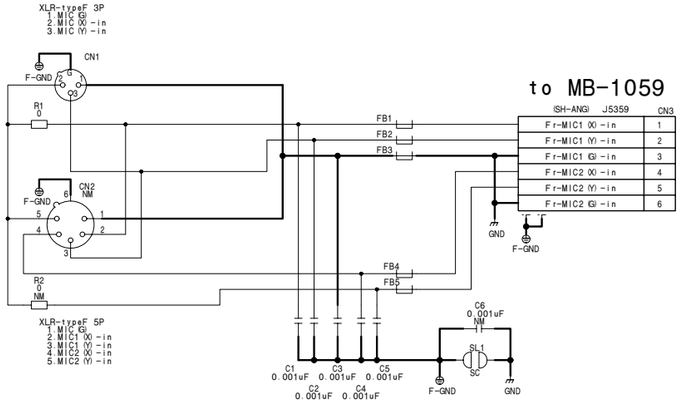


## CN-2616

BOARD NO. 1-865-937-12, 13, 31

HDC-1500_CN-2616_001_1

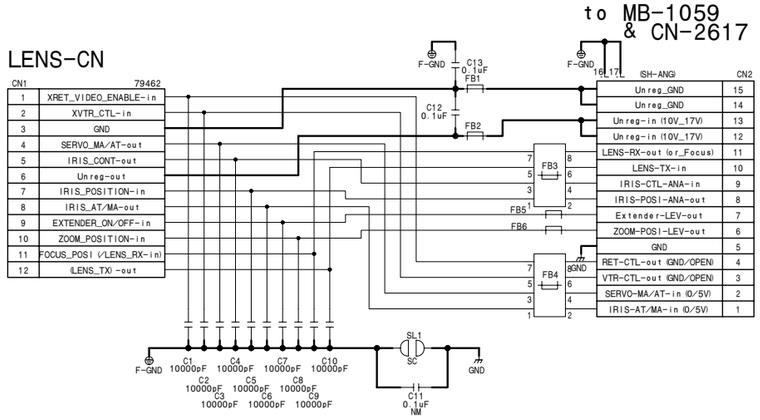


## CN-2615

BOARD NO. 1-865-936-13, 31

HDC-1500_CN-2615_013_1

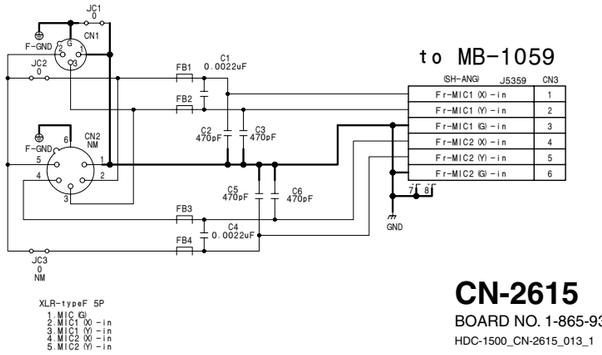


**CN-2617**
BOARD NO. 1-865-938-13, 31
HDC-1500_CN-2617_013_1

**CN-2618, CN-2619**
**SUFFIX: -12, 13, 14, 31 SUFFIX: -12, 21, 31**

1 : Talk-Y
2 : Talk-X
3 : GND
4 : Receive
5 : PGM

to SW-1273
(Incom-Panel)
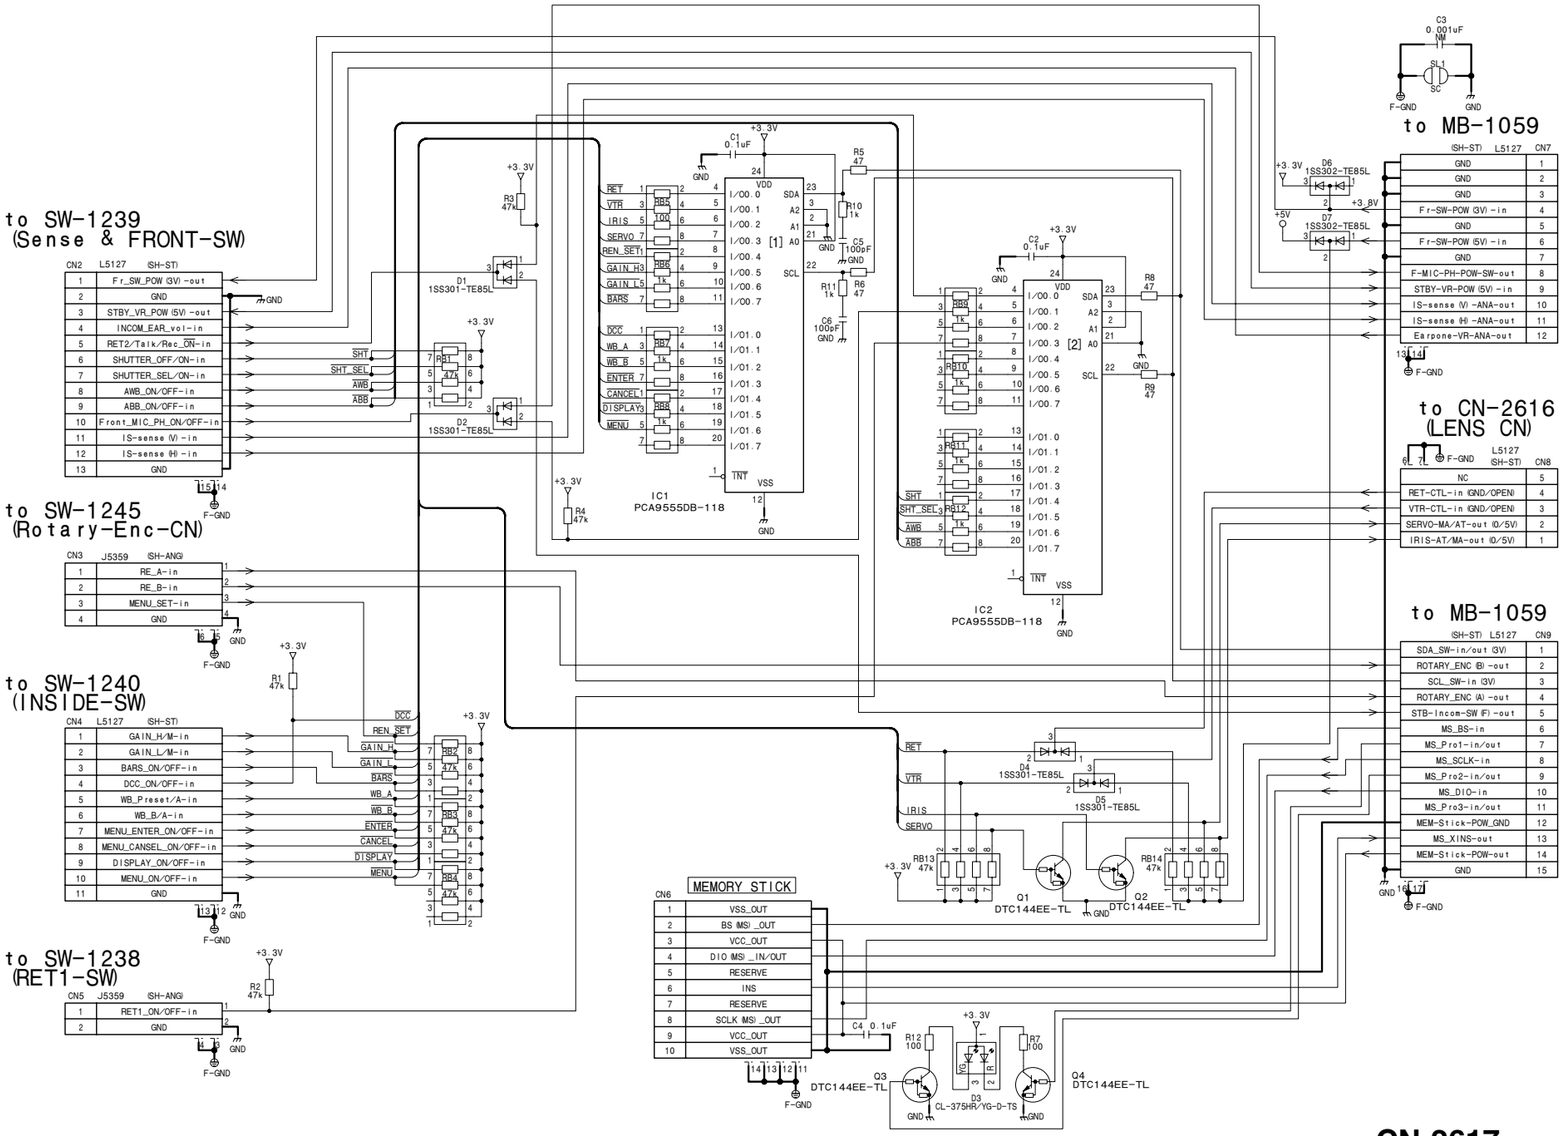
| CN1 | L5127 (SH-ST) J12 J11 F-GND |
|---|---|
| 10 | EXT-INCOM-T (G) |
| 9 | EXT-INCOM-T (X) -out |
| 8 | EXT-INCOM-T (Y) -out |
| 7 | EXT-INCOM-T (G) |
| 6 | EXT-INCOM-R (X) -in |
| 5 | EXT-INCOM-R (Y) -in |
| 4 | EXT-INCOM-R (G) |
| 3 | EXT-INCOM-PGM (X) -in |
| 2 | EXT-INCOM-PGM (Y) -in |
| 1 | EXT-INCOM-PGM (G) |




# CN-2618

BOARD NO. 1-865-939-12

HDC-1500_CN-2618_001_1

1 : Talk-Y
2 : Talk-X
3 : GND
4 : Receive
5 : PGM

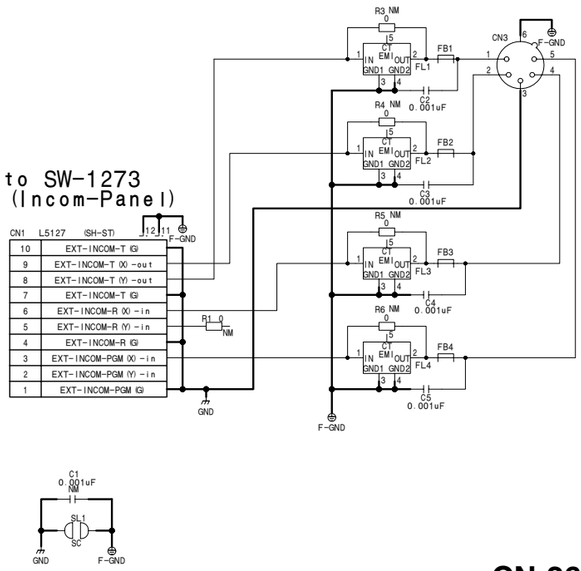to SW-1273
(Incom-Panel)

| CN1 | L5127 (SH-ST) J12 J11 F-GND |
|---|---|
| 10 | EXT-INCOM-T (G) |
| 9 | EXT-INCOM-T (X) -out |
| 8 | EXT-INCOM-T (Y) -out |
| 7 | EXT-INCOM-T (G) |
| 6 | EXT-INCOM-R (X) -in |
| 5 | EXT-INCOM-R (Y) -in |
| 4 | EXT-INCOM-R (G) |
| 3 | EXT-INCOM-PGM (X) -in |
| 2 | EXT-INCOM-PGM (Y) -in |
| 1 | EXT-INCOM-PGM (G) |




# CN-2618

BOARD NO. 1-865-939-13, 14, 31

HDC-1500_CN-2618_003_1

to MB-1059

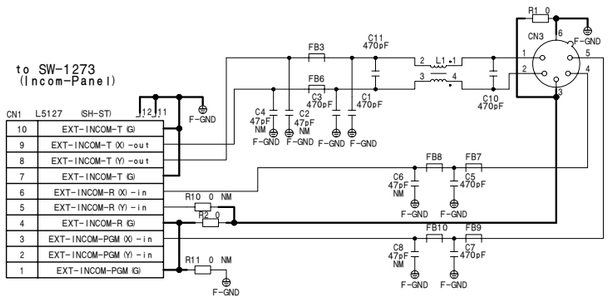J6491 (FPC-0.5-ST) CN1

| | |
|---|---|
| 1 | Trunk-RX1-out |
| 2 | Trunk-RX2-out |
| 3 | Trunk-TX1-in |
| 4 | Trunk-TX2-in |
| 5 | EXT_GND |
| 6 | SDA_EXT-VF-in/out (5V) |
| 7 | SCL_EXT-VF-in (5V) |
| 8 | Tally (R) -Tracker-in |
| 9 | Tally (G) -Tracker-in |
| 10 | Tracker_GND |
| 11 | Tracker-Talk (X) -out |
| 12 | Tracker-Talk (Y) -out |
| 13 | Tracker-Talk (G) -out |
| 14 | Hira-PIN1 |
| 15 | Tracker-Recieve (X) -in |
| 16 | Tracker-R/P-GND |
| 17 | Tracker-PGM (X) -in |
| 18 | Tracker-GND |
| 19 | Earphone (L) -in |
| 20 | Earphone (G) -in |
| 21 | Earphone (R) -in |
| 22 | EXT-Ref/RET-SW-out |
| 23 | Crane-Pr (X) -in |
| 24 | Crane-GND |
| 25 | Crane-Pb (X) -in |
| 26 | Crane-GND |
| 27 | Crane-Y (X) -in |
| 28 | Crane-GND |
| 29 | Analog (G) -in |
| 30 | Analog (X) -in |
| 31 | RET3-CTL-out |
| 32 | Incom1 (CN) -ON/OFF-out |
| 33 | Incom2 (CN) -ON/OFF-out |
| 34 | RET1-CTL-out |
| 35 | RET2-CTL-out |
| 36 | EXT-GND |
| 37 | Prompter (X) -in |
| 38 | Prompter (G) -in |
| 39 | EXT-Ref (X) -out |
| 40 | EXT-Ref (G) -out |




to MB-1059

CN2 98283 (PH-ST)

| | |
|---|---|
| 1 | Unreg (+) |
| 2 | Unreg-GND |

to CN-2640 (Earphone-CN)

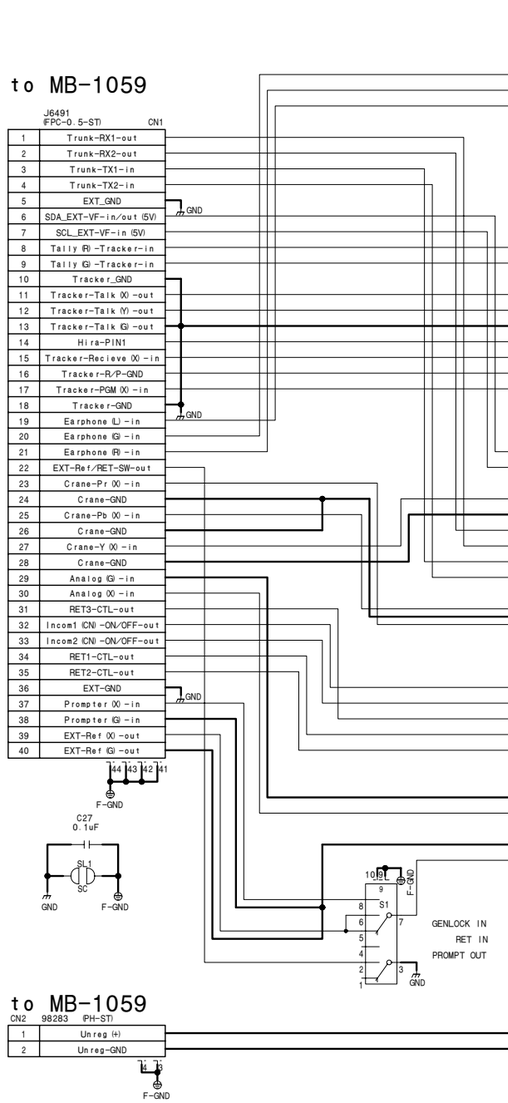(SH-ST) L5127 CN3

| | | |
|---|---|---|
| Earphone (G) -out | 1 | EARPHONE |
| Earphone (L) -out | 2 | |
| Earphone (G) -out | 3 | |
| Earphone (R) -out | 4 | |
| Earphone (G) -out | 5 | |
| NC | 6 | |

TRACKER CN

A5527 CN4

| | | |
|---|---|---|
| Tracker_Receive-out | 1 | TRACKER |
| GND (Talk) | 2 | |
| GND (Receive/PGM/TL) | 3 | |
| Tracker_PGM-out | 4 | |
| Unreg-out (10-17V) | 5 | |
| GND (unreg) | 6 | |
| Tracker_Talk (X) -in | 7 | |
| Tracker_Talk (Y) -in | 8 | |
| G_Tally-out (Open-Corr) | 9 | |
| R_Tally-out (Open-Corr) | 10 | |

CRANE CN

CN5

| | | |
|---|---|---|
| SDA_EXT-VF-in/out | 12 | CRANE |
| SCL_EXT-VF-out | 11 | |
| GND | 10 | |
| Y_VIDEO (X) -out | 9 | |
| GND (video) | 8 | |
| Trunk-RX_DATA (1) -in | 7 | |
| Trunk-RX_DATA (0) -in | 6 | |
| Trunk-TX_DATA (0) -out | 5 | |
| Trunk-TX_DATA (1) -out | 4 | |
| Hira-pin-SW | 3 | |
| Pb_VIDEO (X) -out | 2 | |
| Pr_VIDEO (X) -out | 1 | |

RET CONT CN

79463 CN6

| | | |
|---|---|---|
| Incom1-MIC-ON/OFF-in | 1 | RET CONT |
| Incom2-MIC-ON/OFF-in | 2 | |
| GND | 3 | |
| RET3-ON/OFF-in | 4 | |
| RET1-ON/OFF-in | 5 | |
| RET2-ON/OFF-in | 6 | |

to CN-2620 (BNC-CN)

(SH-ST_AU) L5127 CN7

| | | |
|---|---|---|
| REF-in/PROMPT (G) -out | 5 | BNC CN |
| REF-in/PROMPT (X) -out | 4 | |
| Analog (G) -out | 3 | |
| Analog (X) -out | 2 | |
| GND | 1 | |

DC OUT CN 14V/1.5A

A5258 CN8

| | | |
|---|---|---|
| UNREG-out | 4 | DC-OUT |
| NC | 3 | |
| NC | 2 | |
| UNREG_GND | 1 | |




# CN-2619

BOARD NO. 1-865-940-12, 21, 31

HDC-1500_CN-2619_001_1




# CN-2620

BOARD NO. 1-865-941-12, 31

HDC-1500_CN-2620_001_1

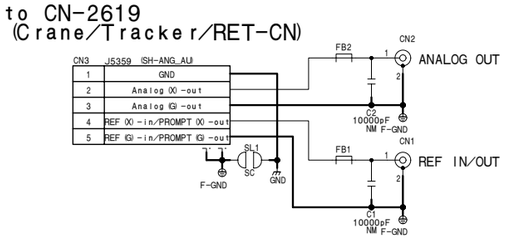


# CN-2621

BOARD NO. 1-865-942-13, 21

HDC-1500_CN-2621_001_1

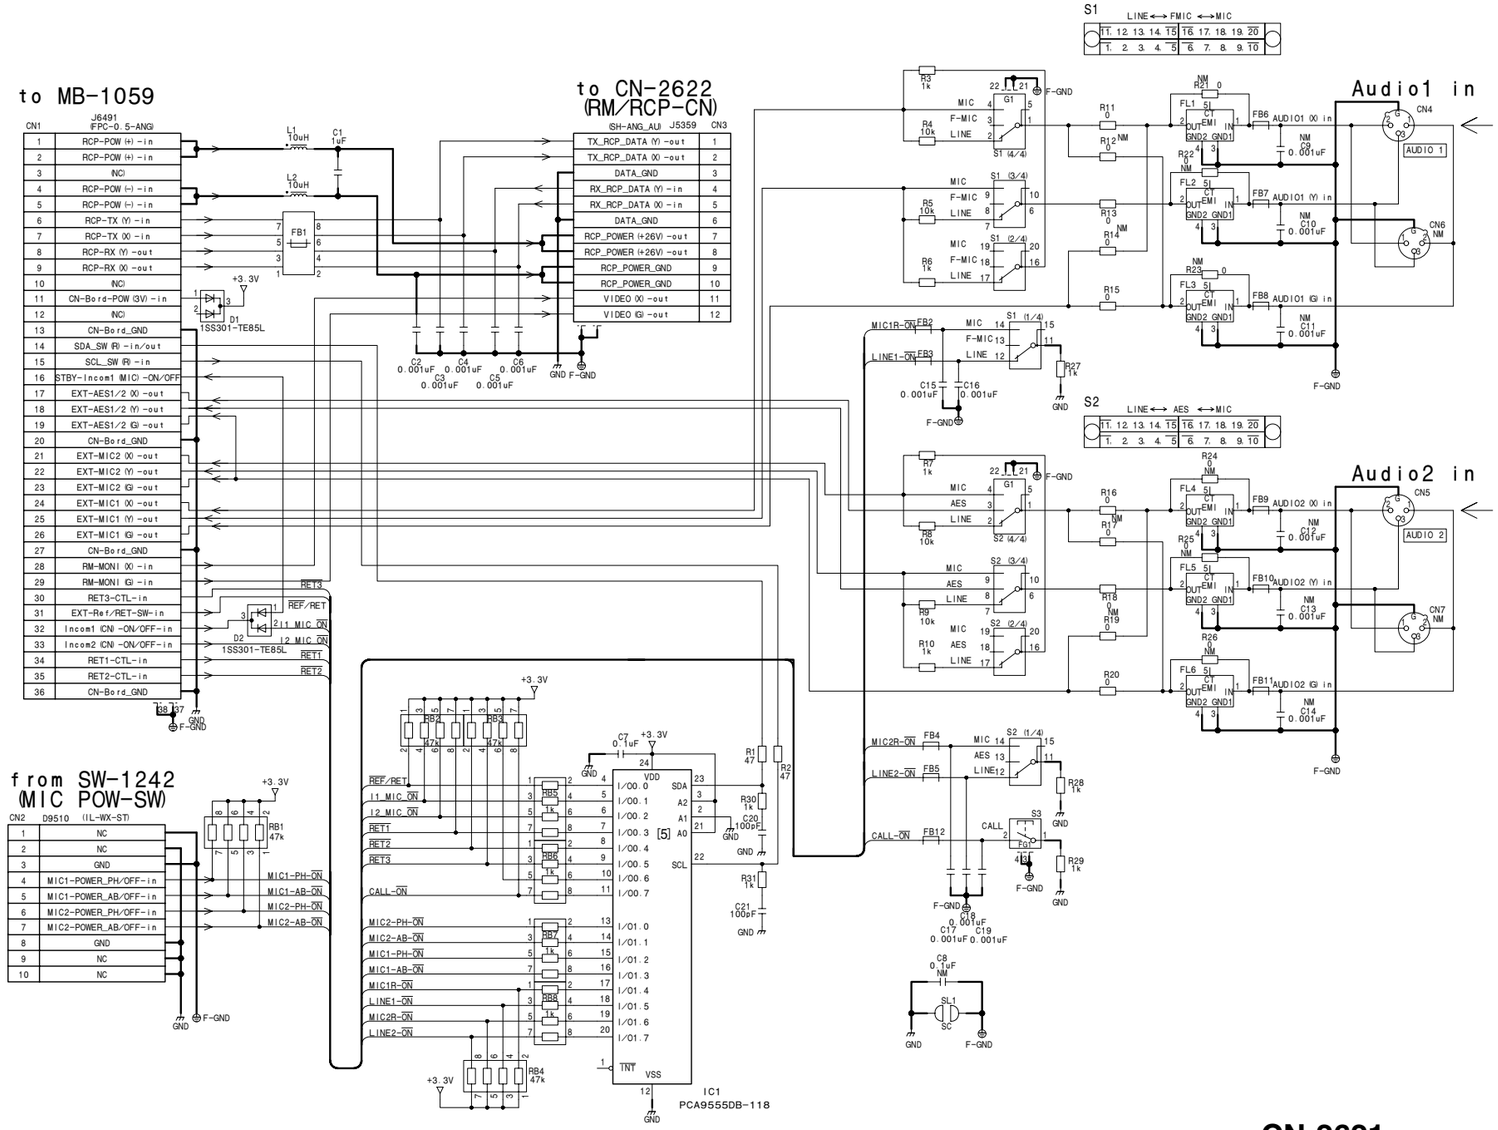


| | JC3-8 | JC9-14 | CN8 |
|---|---|---|---|
| A-1099-121-A CN-2621 MOUNT<br>A-1159-985-A CN-2621G MOUNT | Mt | NoMt | NoMt |
| A-1251-711-A CN-2621GA MOUNT | NoMt | Mt | Mt |

**CN-2621GA**
BOARD NO. 1-865-942-22, 31
HDC-1500_CN-2621GA_022_1




## CN-2622

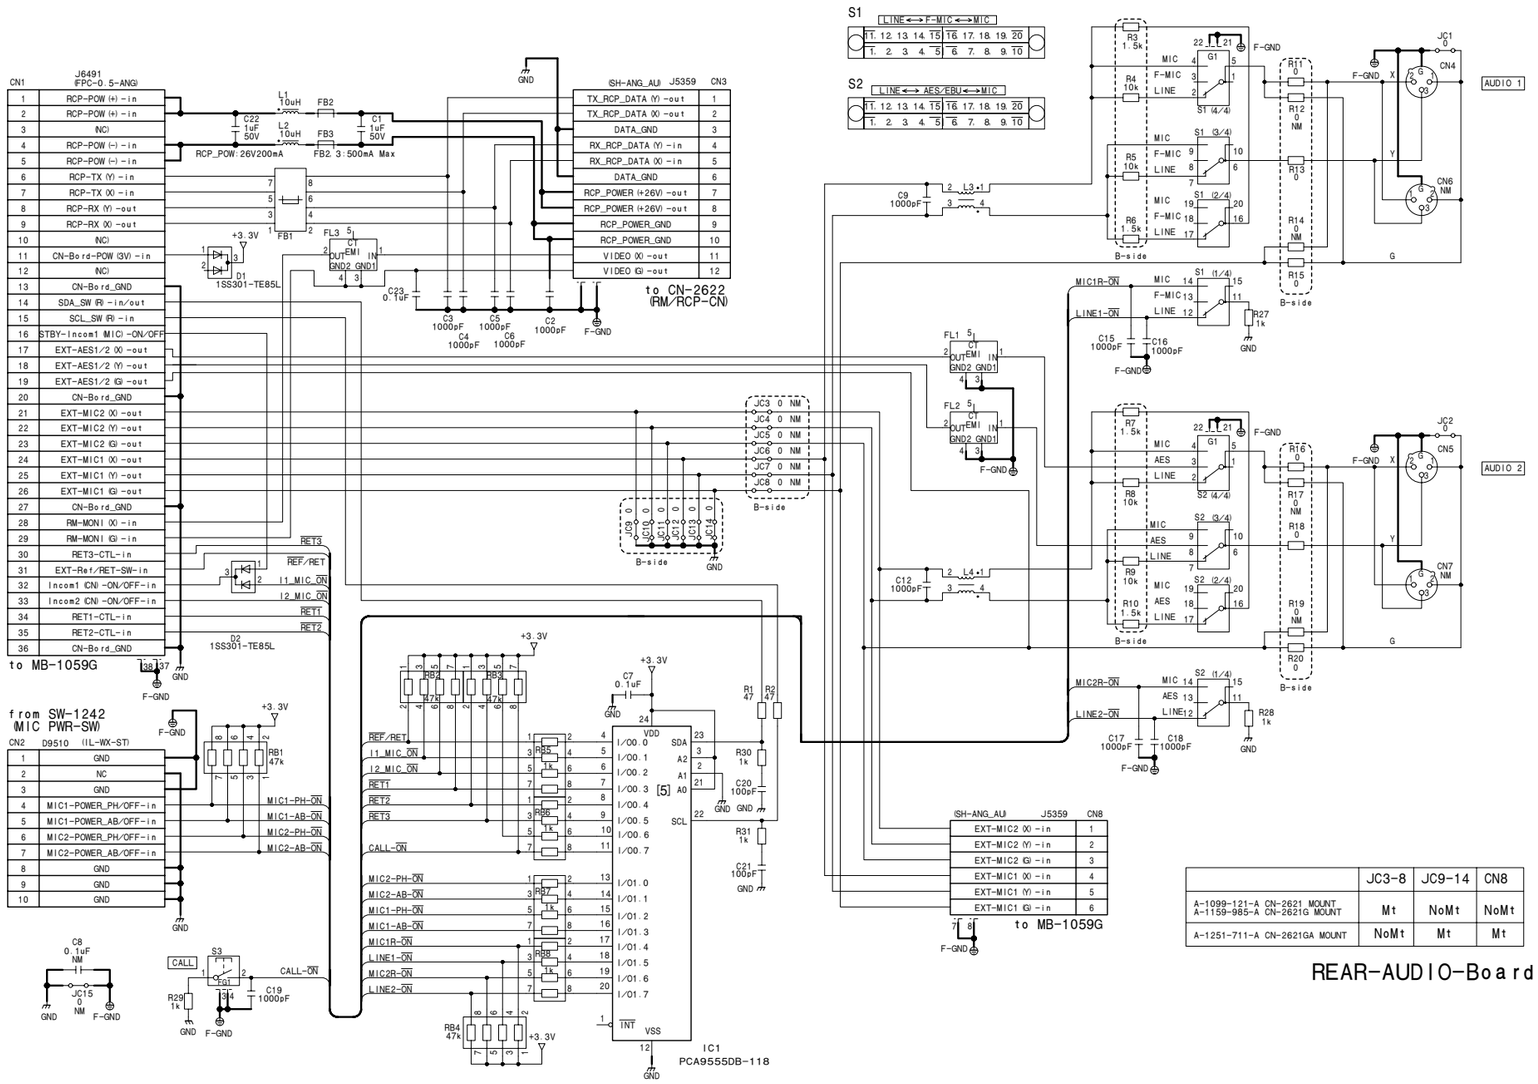BOARD NO. 1-865-943-13, 31

HDC-1500_CN-2622_013_1

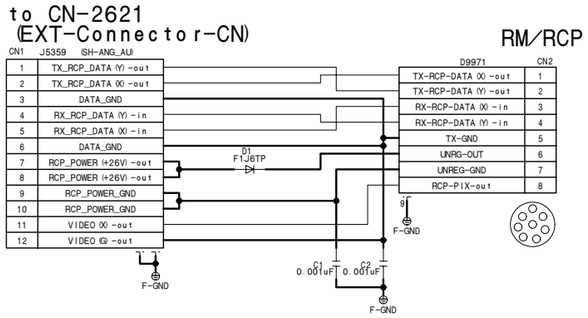


## CN-2623

BOARD NO. 1-865-944-13, 31

HDC-1500_CN-2623_001_1

CN-2622, CN-2623, CN-2640, CN-2671
SUFFIX: -13, 31 SUFFIX: -13, 31 SUFFIX: -12, 31 SUFFIX: -11, 31

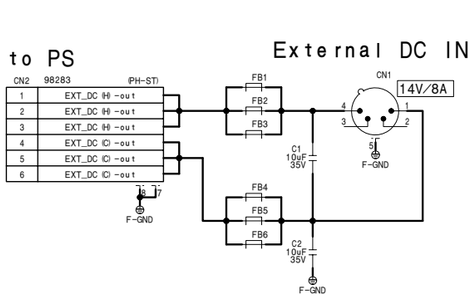


## CN-2640

BOARD NO. 1-865-945-12, 31

HDC-1500_CN-2640_001_1

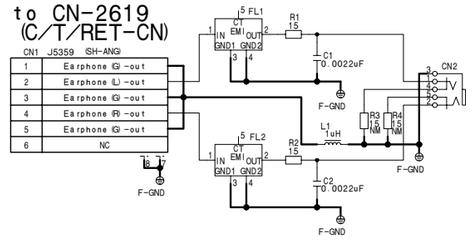


## CN-2671

BOARD NO. 1-867-468-11, 31

HDC-1000_CN-2671_011_1

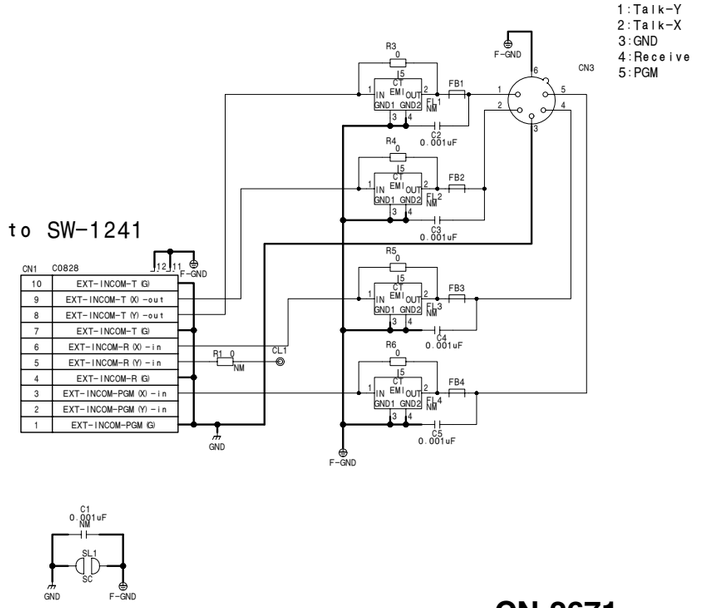


HDC1000/V2 (J, E)



**CN-2712**
BOARD NO. 1-865-962-11
HDC-1600_CN-2712_011_1

# To DR-562
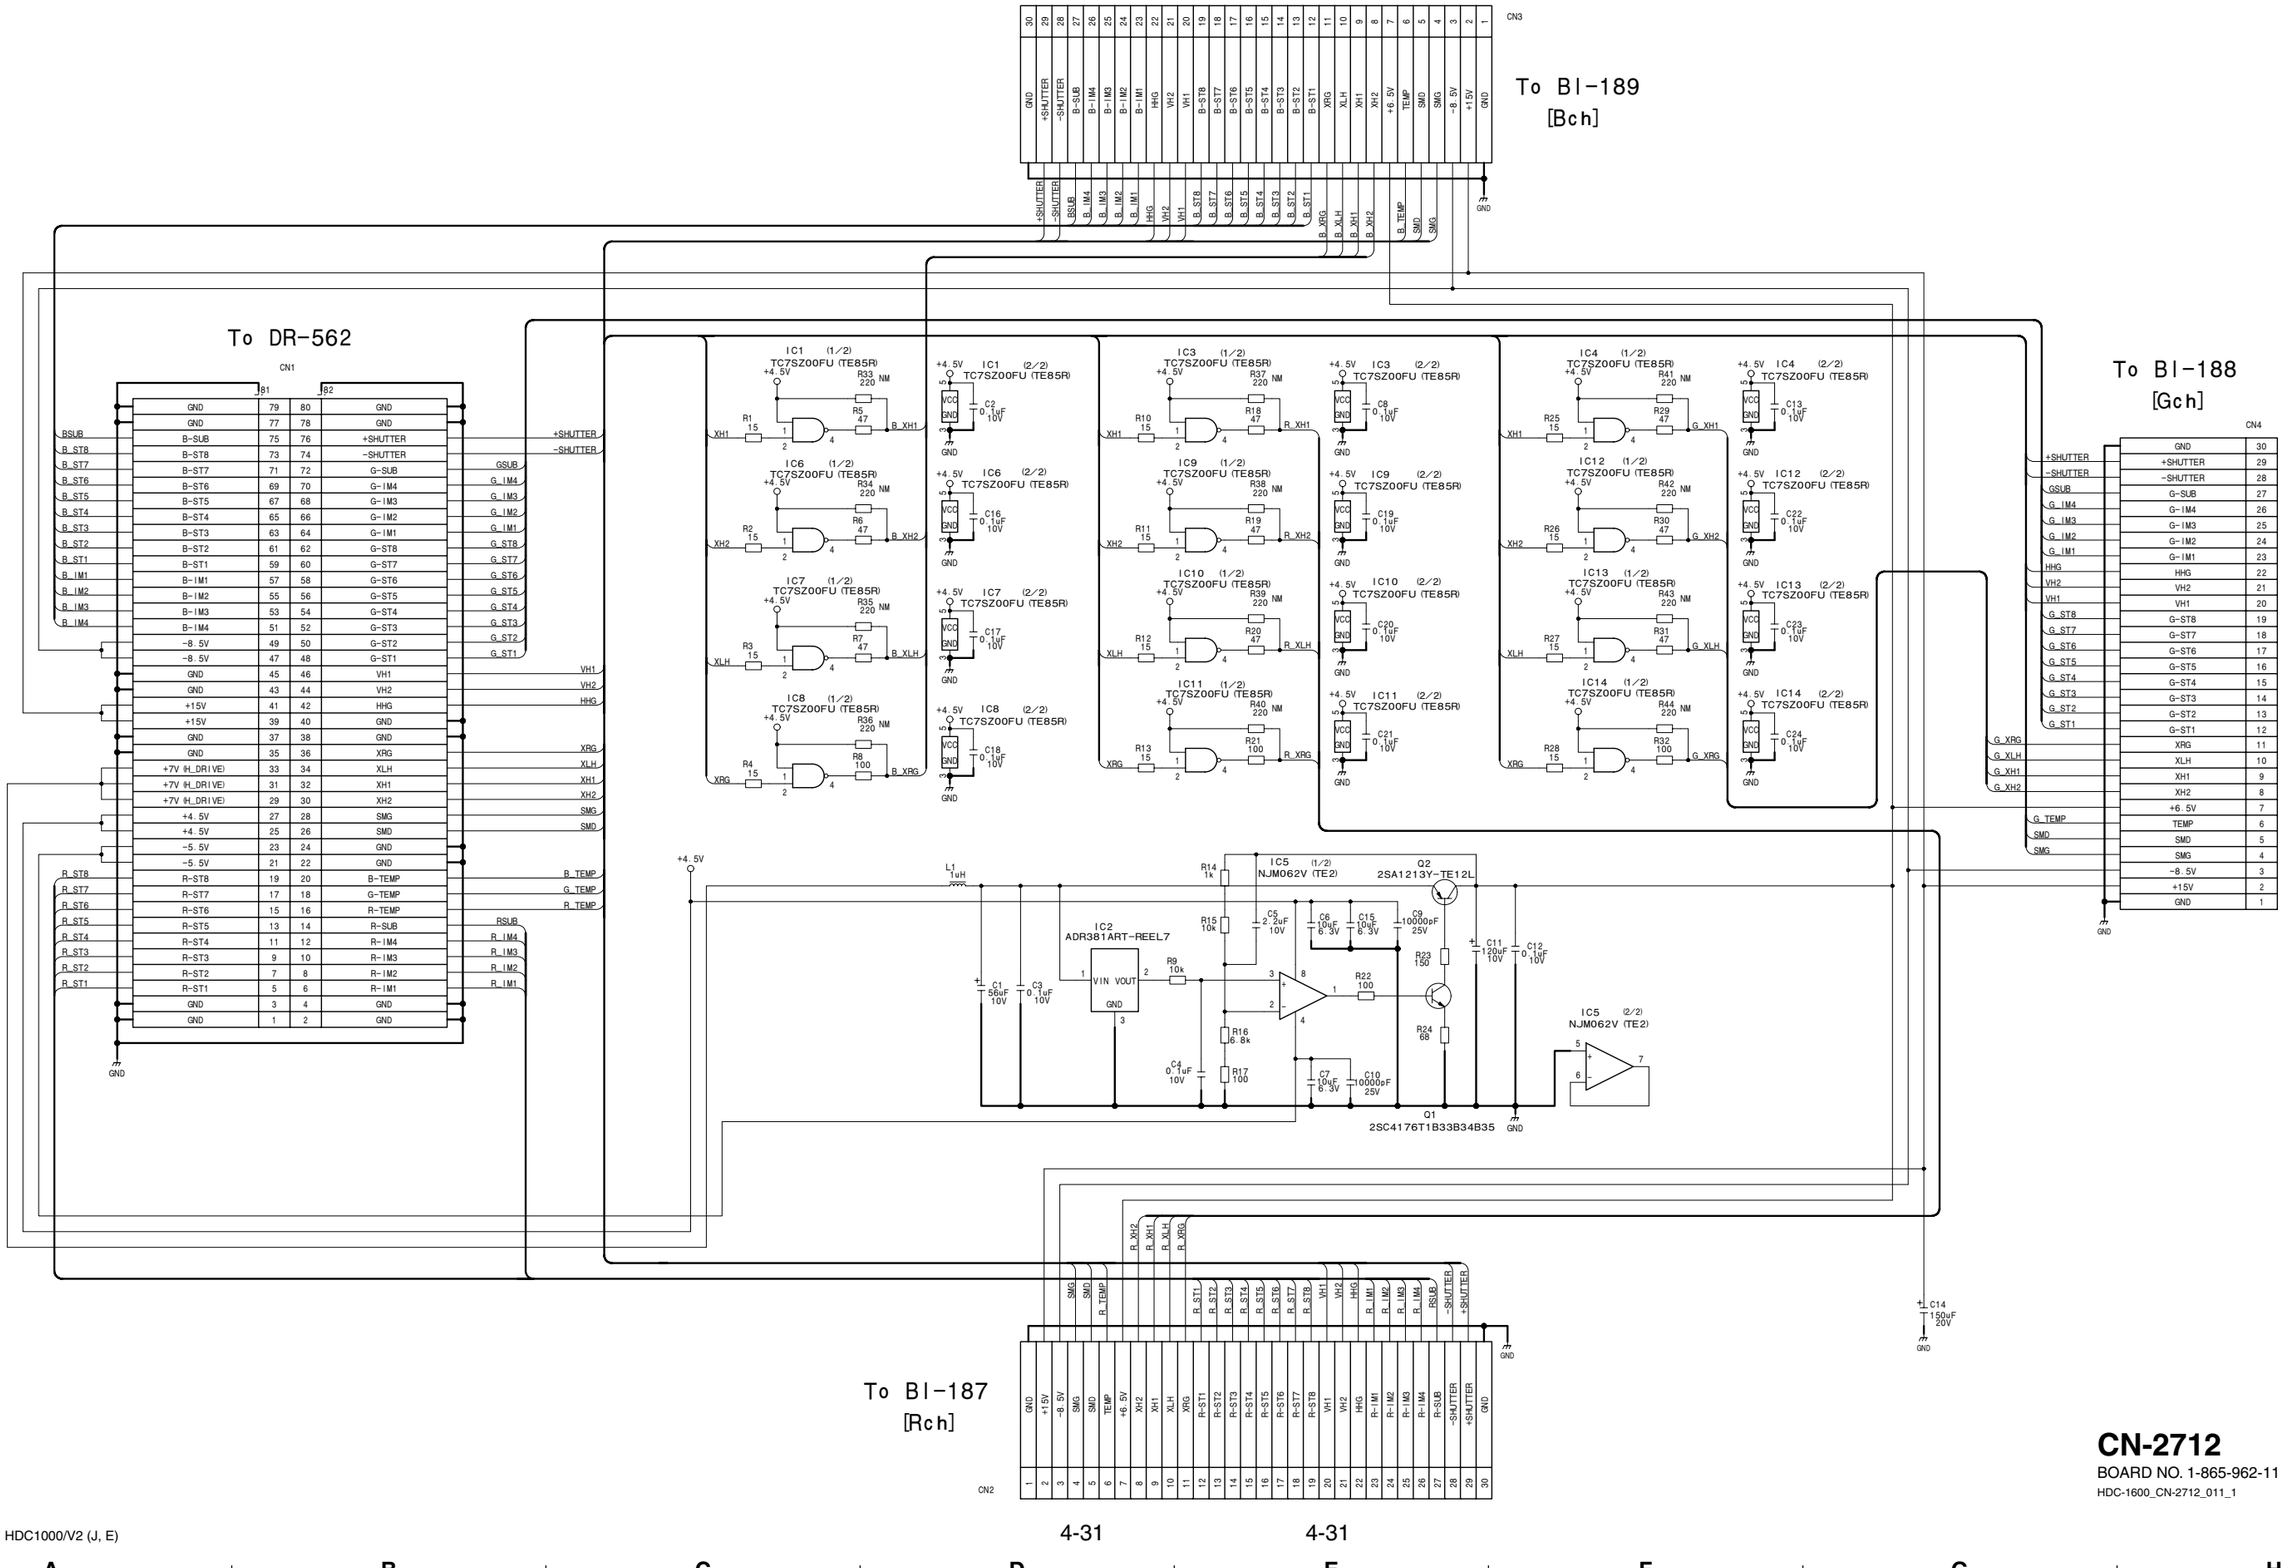
# To CHU (MB-1059)

## 100pin/ST/Plug

# To PA-327




**CN-2723**

BOARD NO. 1-865-966-11, 21

HDC-1600_CN-2723_011_1

# DAP-33 (1/4)

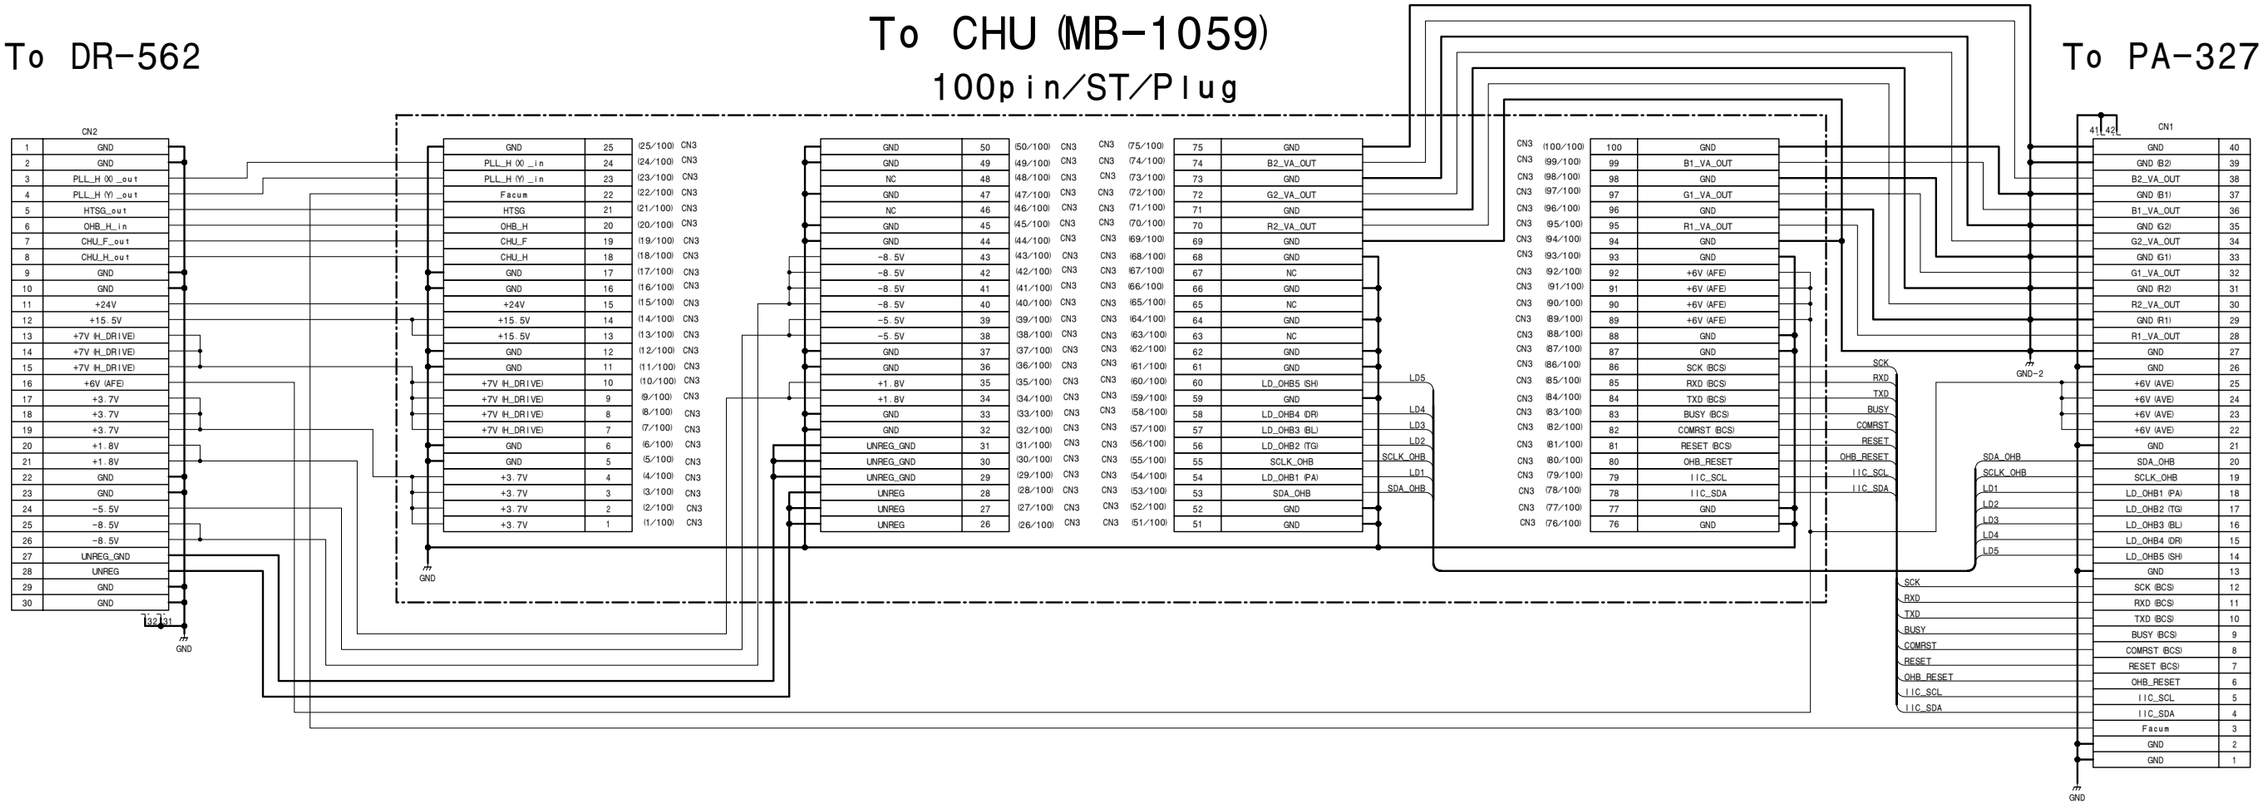**SUFFIX: -12, 13, 31**

DAP-33 (1/4)
SUFFIX: -12, 13, 31






**DAP-33 (1/4)**

BOARD NO. 1-865-932-12, 13, 31

HDC-1500_DAP-33_012_1

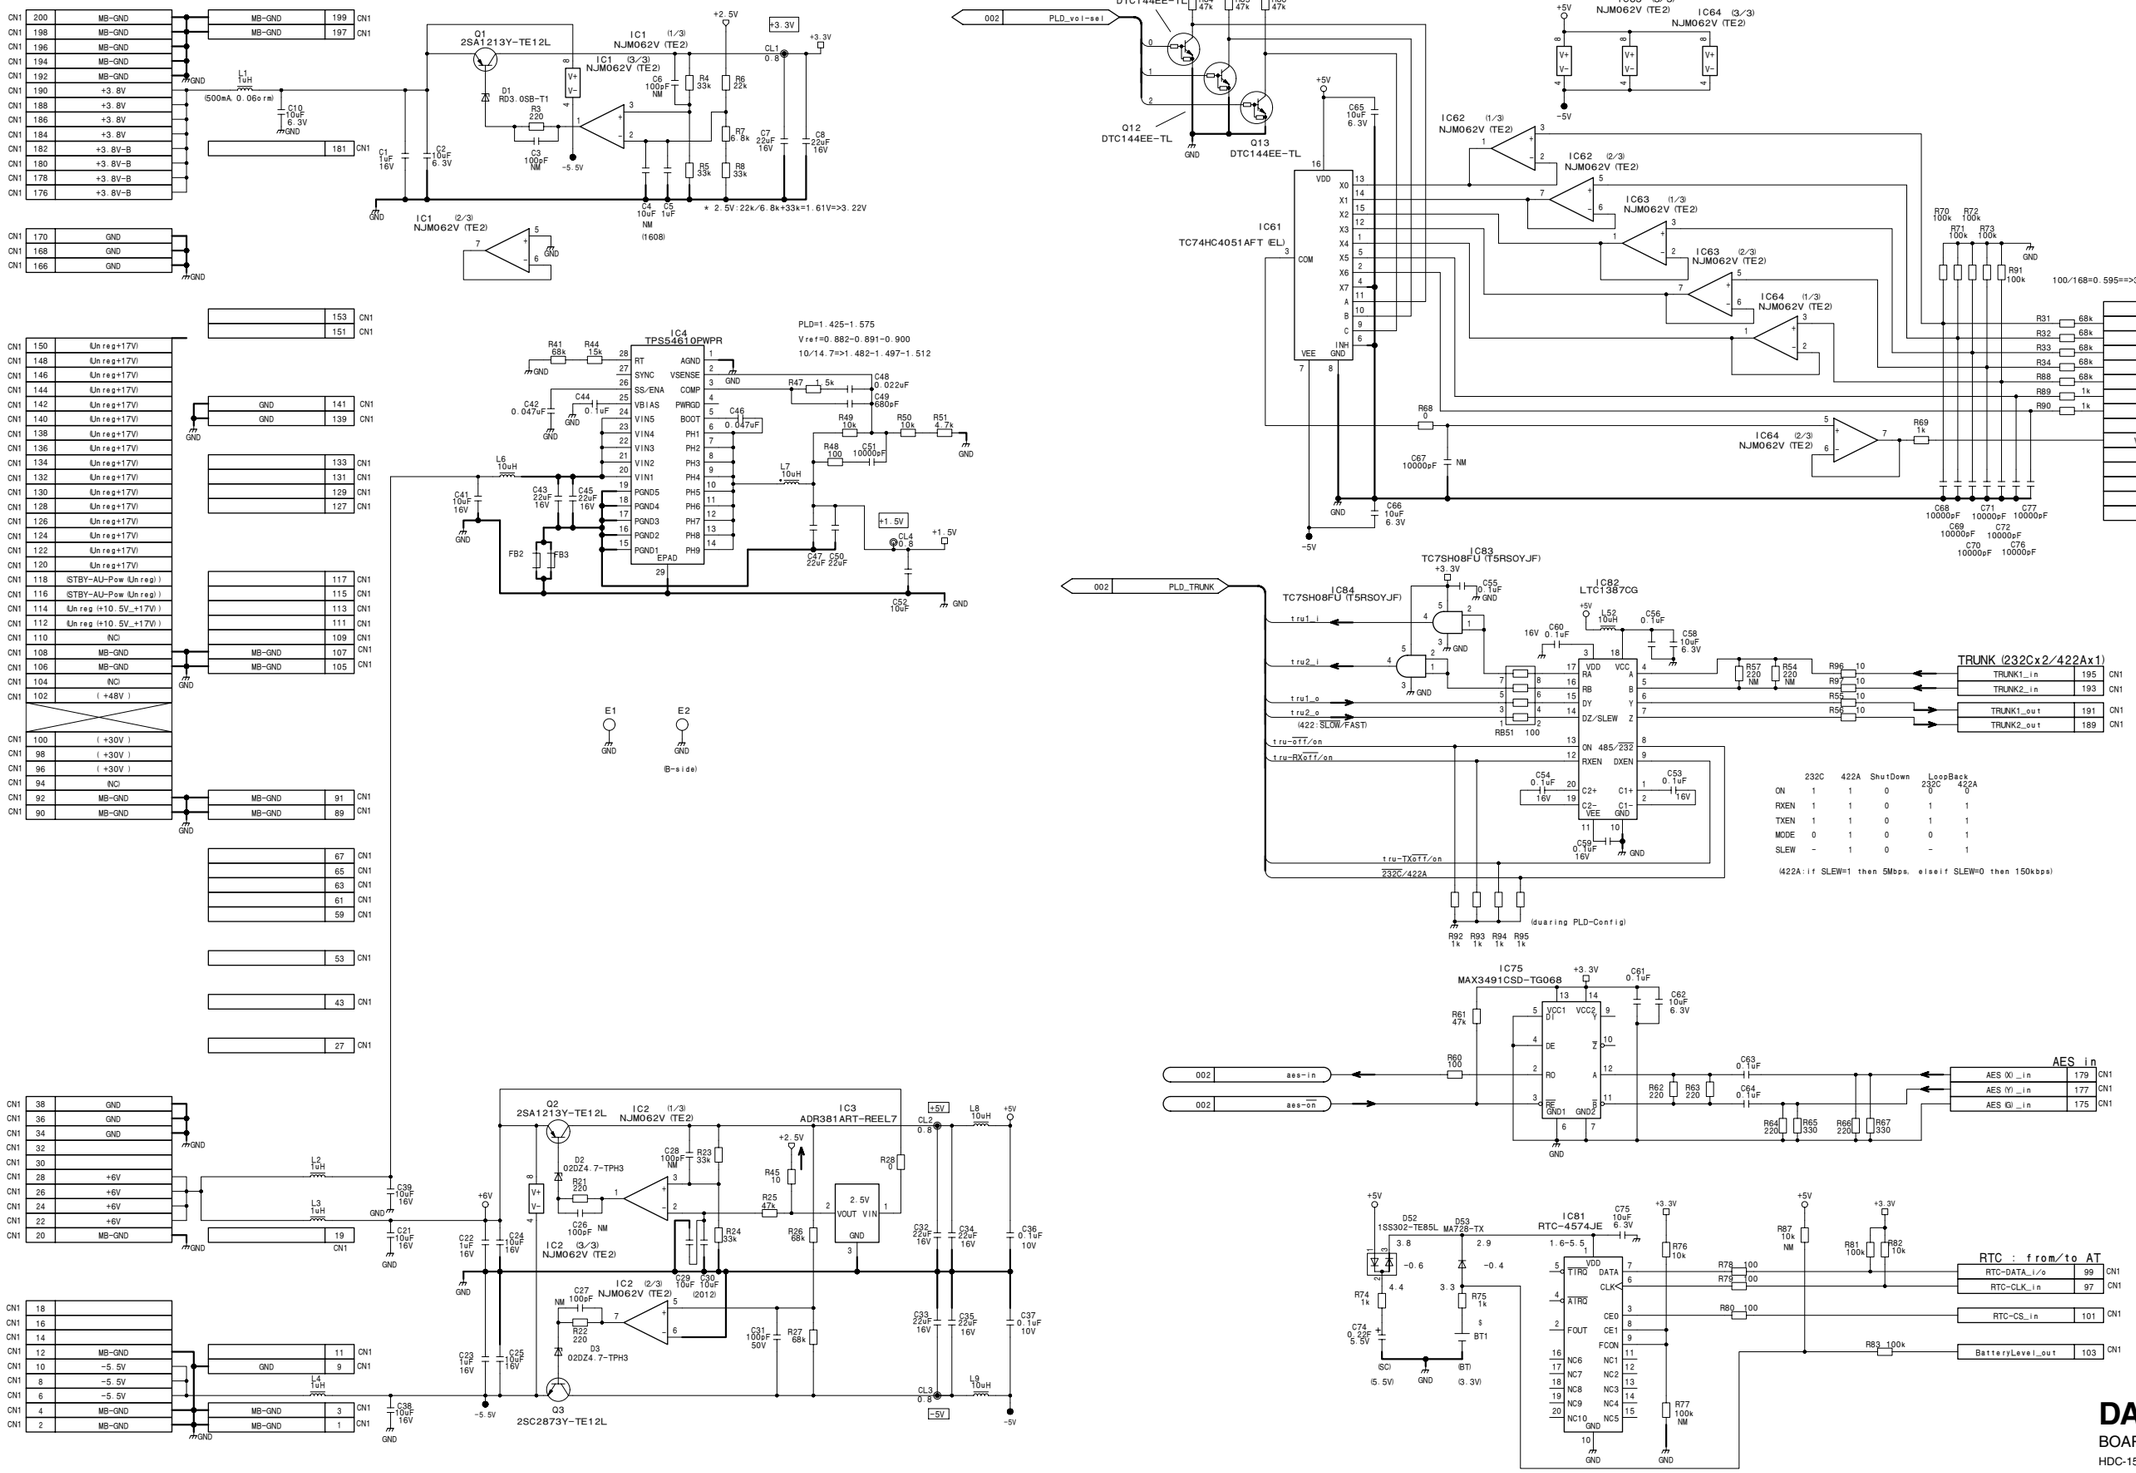**DAP-33 (2/4)**
SUFFIX: -12, 13, 31


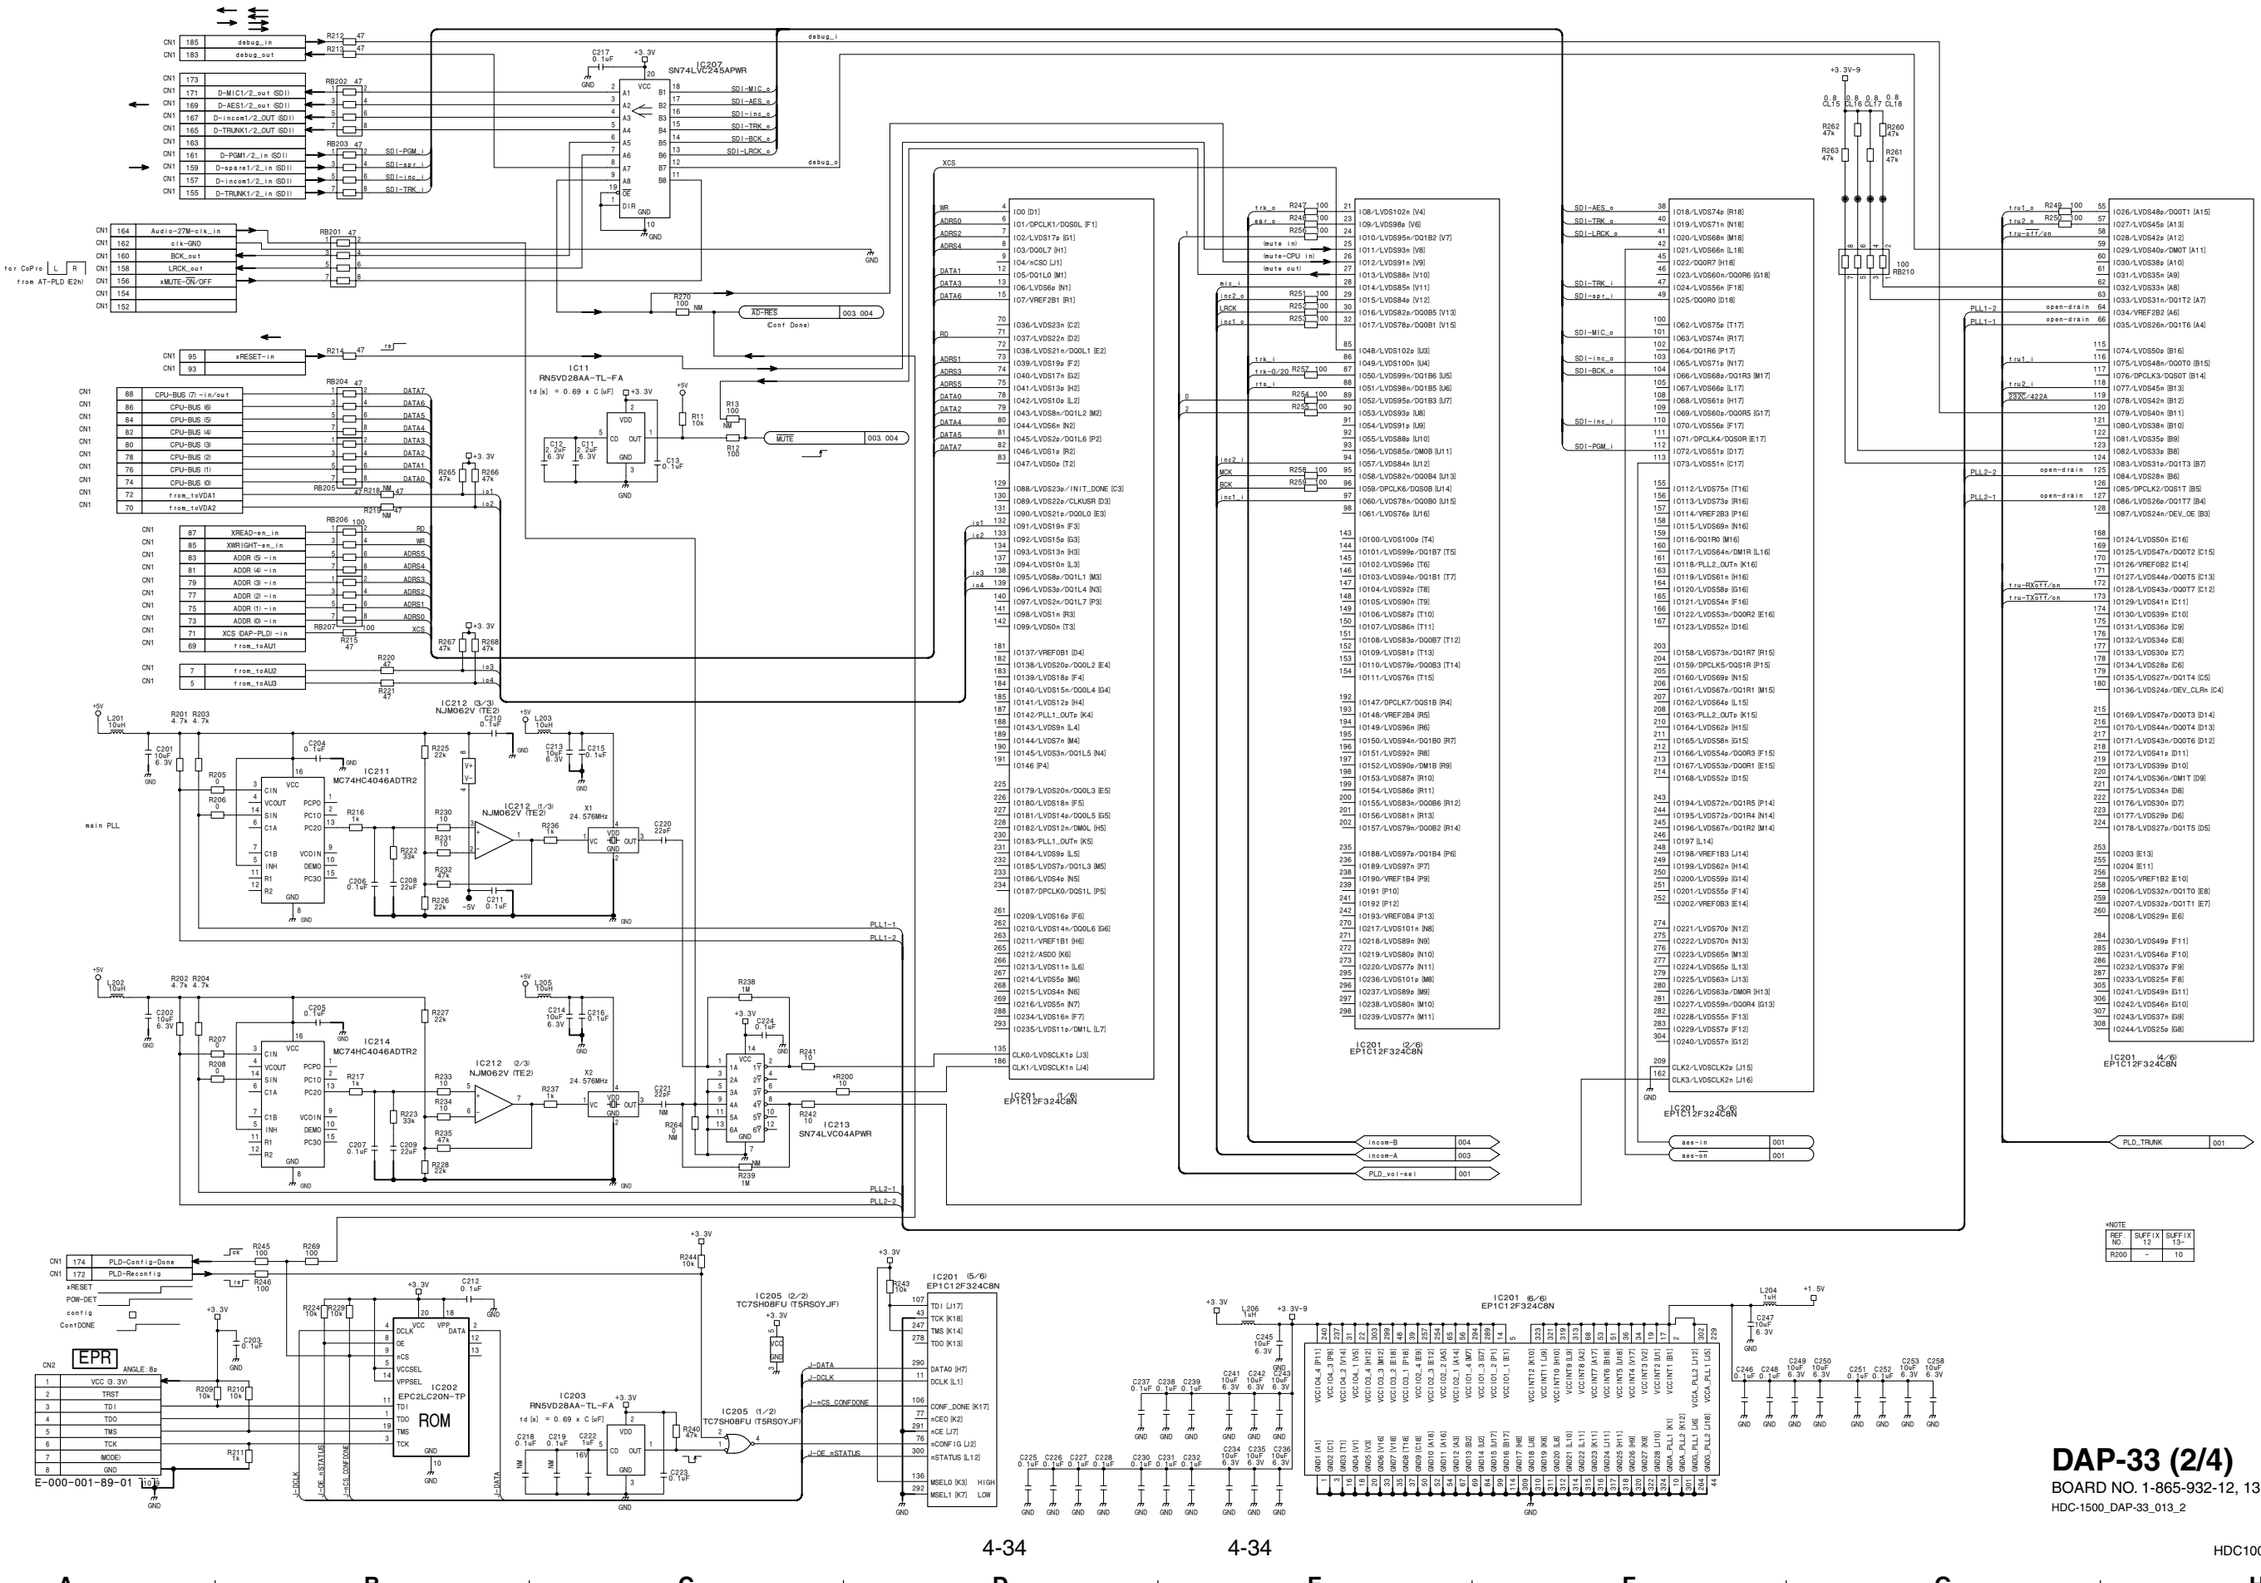




**DAP-33 (2/4)**
BOARD NO. 1-865-932-12, 13, 31
HDC-1500_DAP-33_013_2

**DAP-33 (3/4)**
**SUFFIX: -12, 13, 31**




**DAP-33 (3/4)**
BOARD NO. 1-865-932-12, 13, 31
HDC-1500_DAP-33_012_3

# DAP-33 (4/4)
**SUFFIX: -12, 13, 31**

DAP-33 (4/4)
SUFFIX: -12, 13, 31

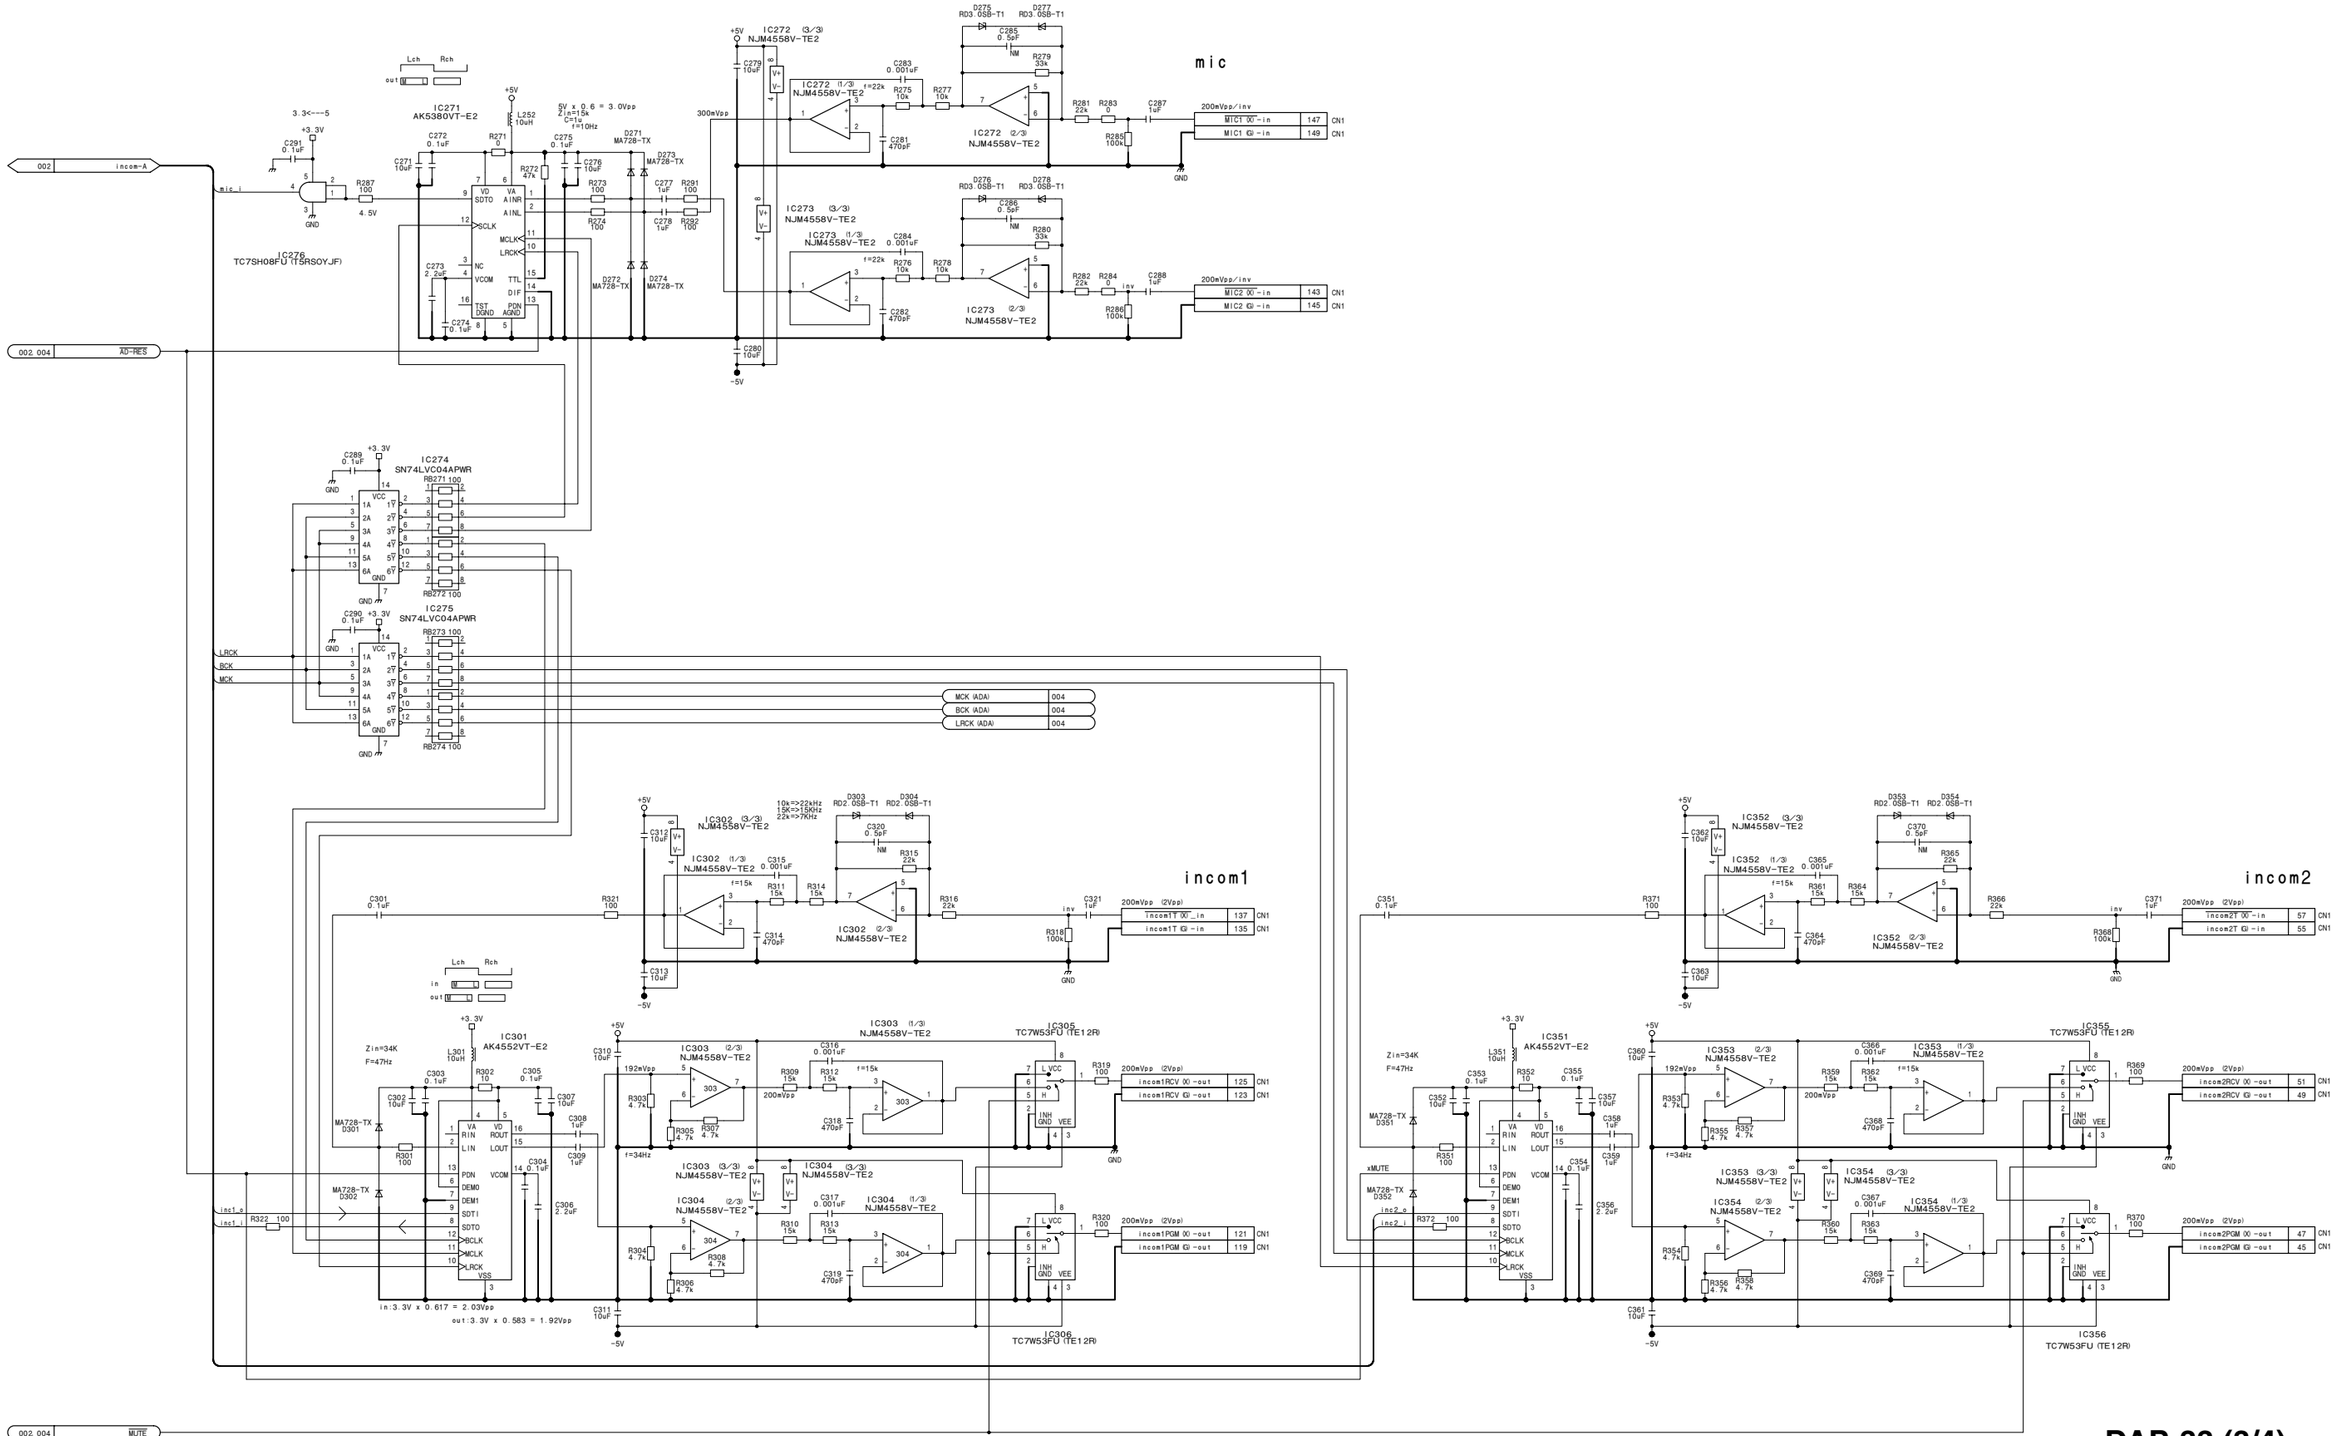


# DAP-33 (4/4)
BOARD NO. 1-865-932-12, 13, 31
HDC-1500_DAP-33_013_4



4-36

**DPR-265 (1/8)**
**SUFFIX: -11, 13, 14**
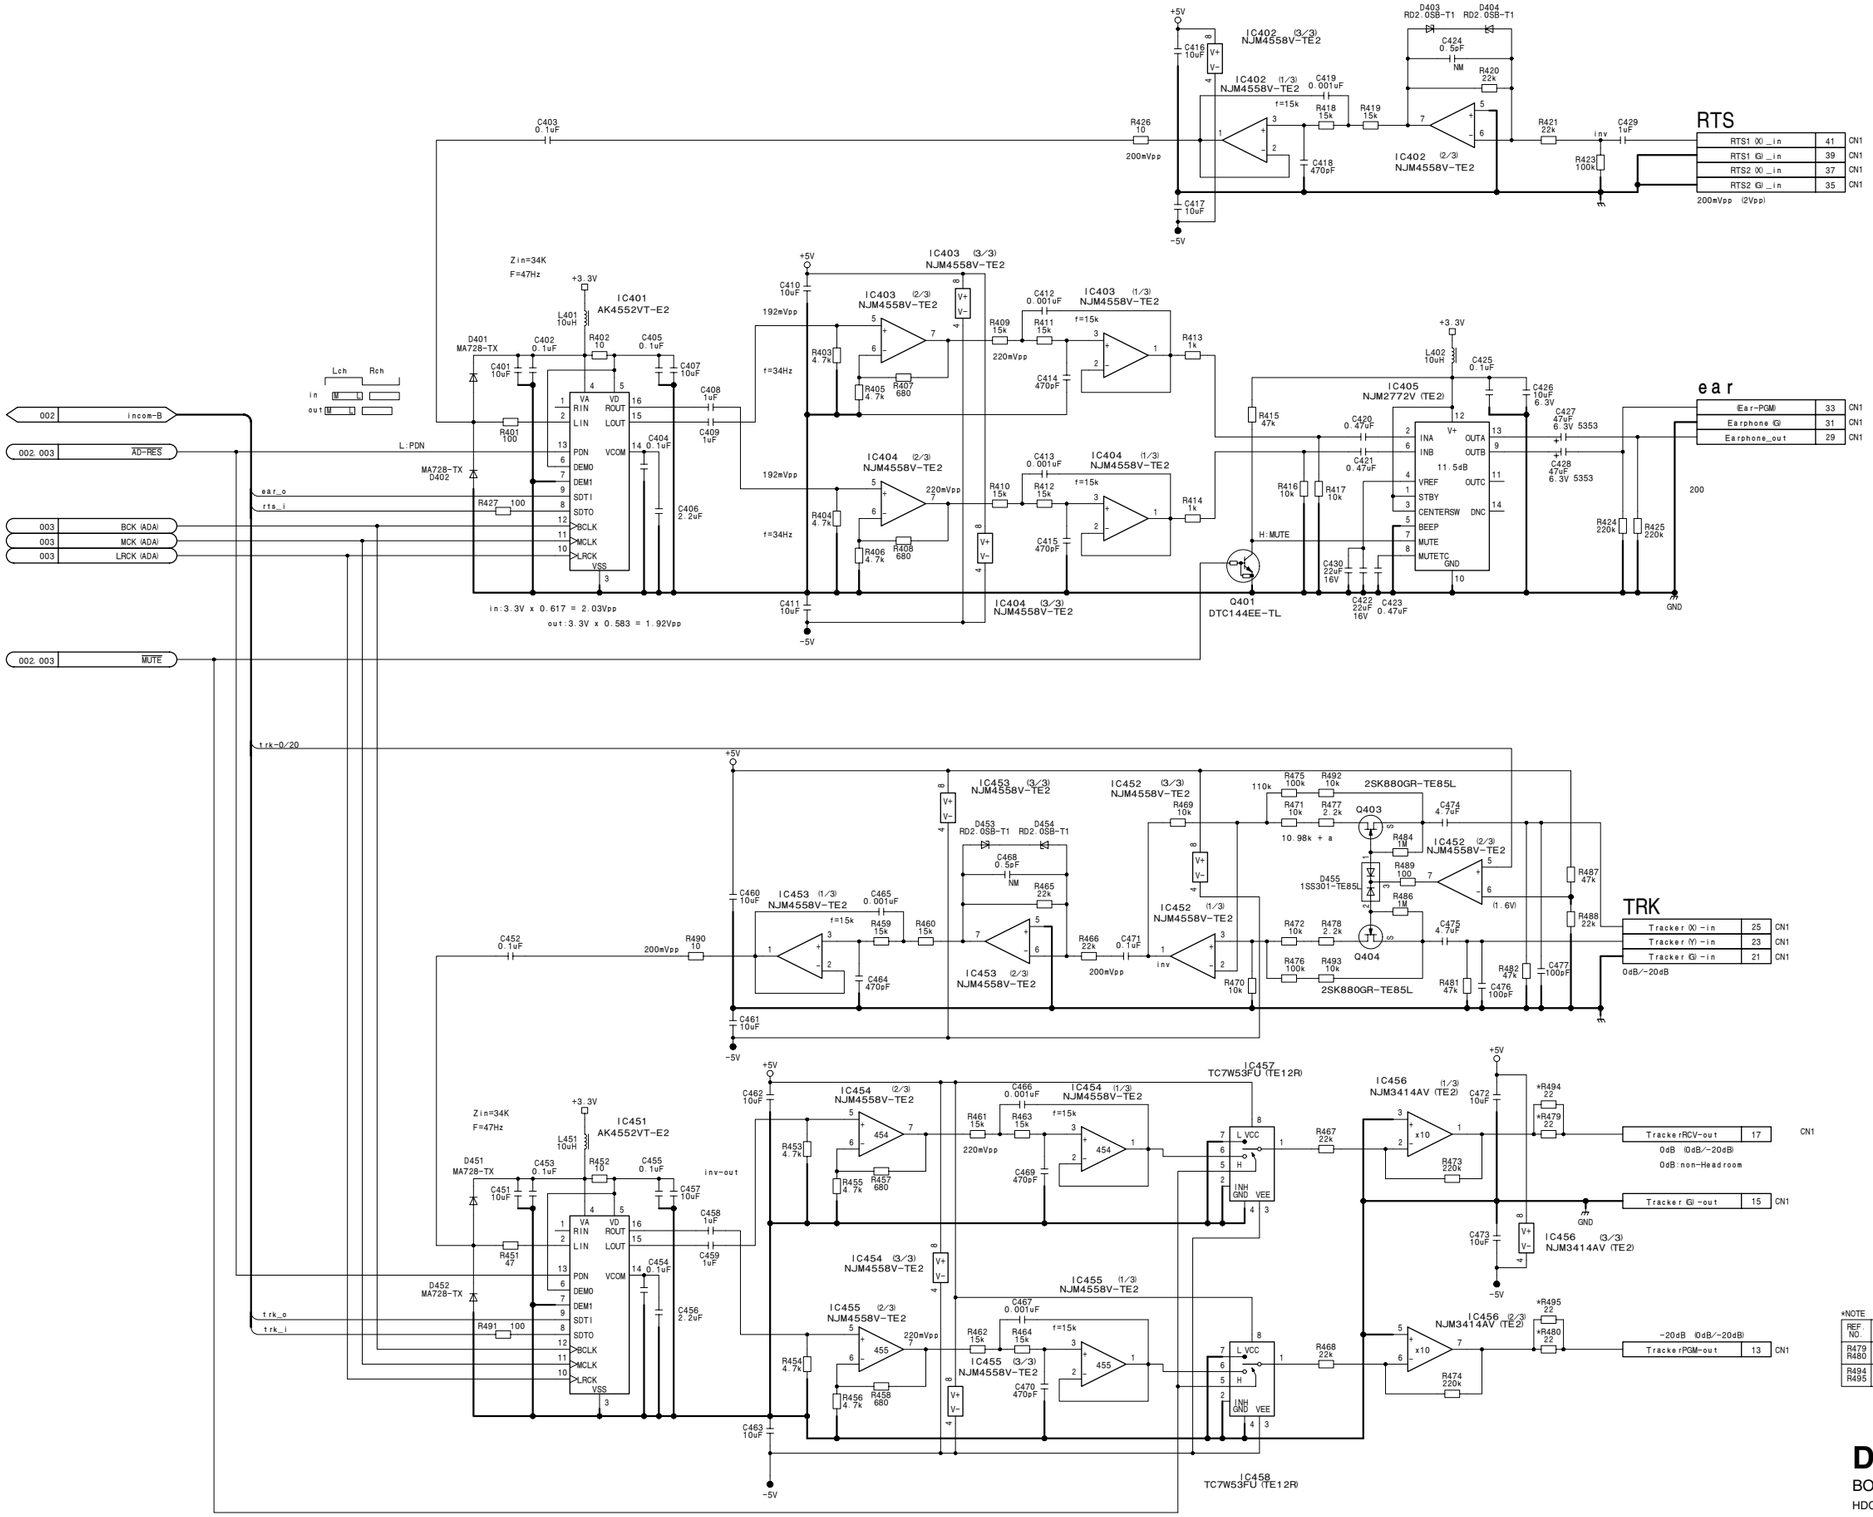
## DPR-264_200P (F) (to MB) -CN (1-794-239-11)




+NOTE

| REF NO. | SUFFIX 11 | SUFFIX 13- |
|---|---|---|
| C108 | 47uF6.3V | 10uF16V |
| L105 | 4.7uH | 1uH |
| L106 | - | 1uH |
| C11 C12 | - | 3300pF |
| R11 R12 | - | 2.2 |

## DPR-265_200P (M) (to SDI) -CN (1-794-452-11)




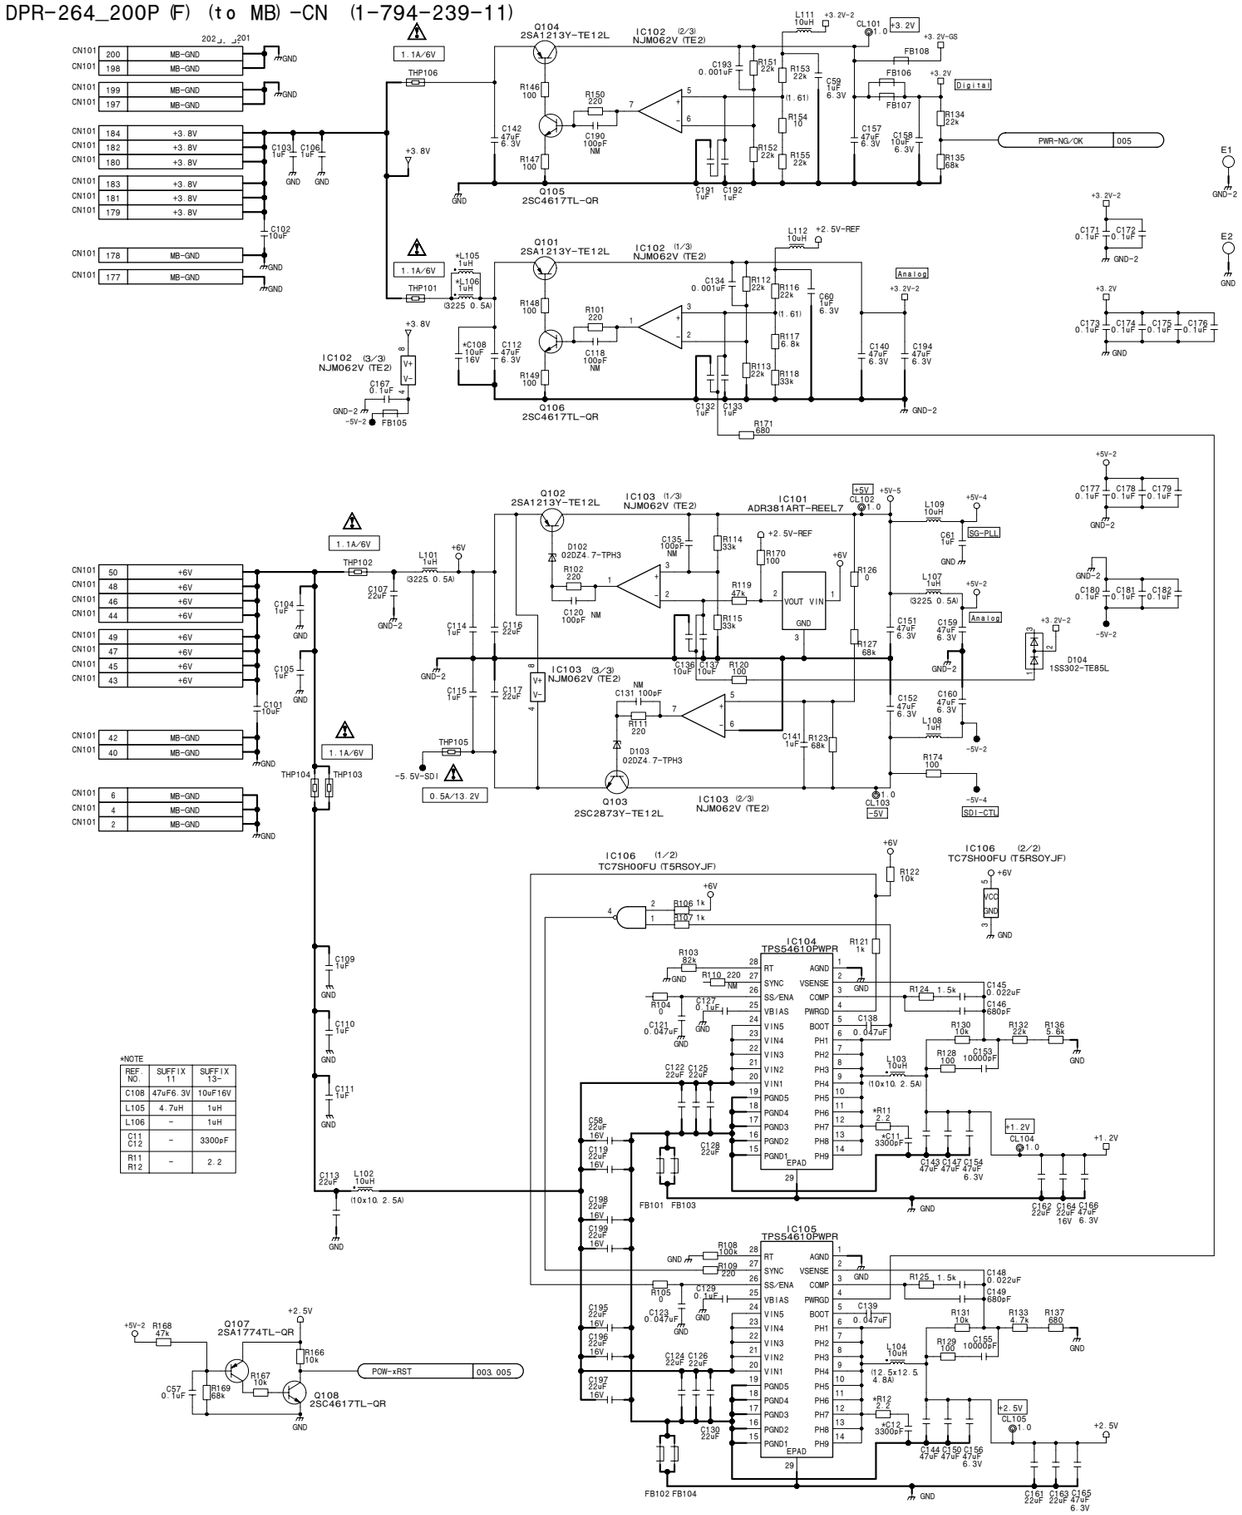

**DPR-265 (1/8)**
BOARD NO. 1-865-929-11, 13, 14
HDC-1500_DPR-265_014_1


IC201 LMH6732MFX/NOPB
IC204 (1/2) AD8138ARM
IC204 (2/2) AD8138ARM
IC232 LTC2249
CN101 55 CCD-R1 (0) -in
CN101 57 CCD-R1 (G)
191.70mV=250mVx (328.8/428.8)
851.37mV=191.70mVx4.4412
x4.4412
142.55mV=285.1mV/2
406.5mV
+5V-2
+3.2V-2
+2.5V
-5V-2
A1R 003
R_FEEDBACK1 002
74CLK-A/D (R) 005
IC202 LMH6732MFX/NOPB
IC205 (1/2) AD8138ARM
IC205 (2/2) AD8138ARM
IC208 LTC2249
CN101 67 CCD-G1 (0) -in
CN101 69 CCD-G1 (G)
A1G 003
G_FEEDBACK1 002
74CLK-A/D (G) 005
IC203 LMH6732MFX/NOPB
IC206 (1/2) AD8138ARM
IC206 (2/2) AD8138ARM
IC209 LTC2249
CN101 79 CCD-B1 (0) -in
CN101 81 CCD-B1 (G)
A1B 003
B_FEEDBACK1 002
74CLK-A/D (B) 005
IC210 TC7W53FU (TE12R)
IC211 TC7W53FU (TE12R)
IC212 TC7W53FU (TE12R)
IC225 (1/3) NJM062V (TE2)
IC225 (2/3) NJM062V (TE2)
IC225 (3/3) NJM062V (TE2)
IC226 (1/3) NJM062V (TE2)
IC226 (2/3) NJM062V (TE2)
IC226 (3/3) NJM062V (TE2)
IC230 (4/7) TC74VHCT04AFT (EL)
IC230 (3/7) TC74VHCT04AFT (EL)
IC230 (6/7) TC74VHCT04AFT (EL)
IC230 (5/7) TC74VHCT04AFT (EL)
IC230 (7/7) TC74VHCT04AFT (EL)
IC230 (1/7) TC74VHCT04AFT (EL)
IC230 (2/7) TC74VHCT04AFT (EL)
002 R_FEEDBACK1
002 G_FEEDBACK1
002 B_FEEDBACK1
R1-FB-SIGN 003
R1-FB-GATE 003
G1-FB-SIGN 003
G1-FB-GATE 003
B1-FB-SIGN 003
B1-FB-GATE 003
CN101 91 Analog-GND
CN101 89 Analog-GND
CN101 88 Analog-GND
CN101 86 Analog-GND
CN101 84 Analog-GND
CN101 82 Analog-GND
CN101 80 Analog-GND
CN101 78 Analog-GND
CN101 76 Analog-GND
CN101 74 Analog-GND
CN101 72 Analog-GND
CN101 70 Analog-GND
CN101 68 Analog-GND
CN101 66 Analog-GND
CN101 64 Analog-GND
CN101 62 Analog-GND
CN101 60 Analog-GND
CN101 58 Analog-GND
CN101 56 Analog-GND
CN101 54 Analog-GND
CN101 52 Analog-GND
CN101 83
CN101 77
CN101 71
CN101 65
CN101 59
CN101 53
CN101 51 Analog-GND




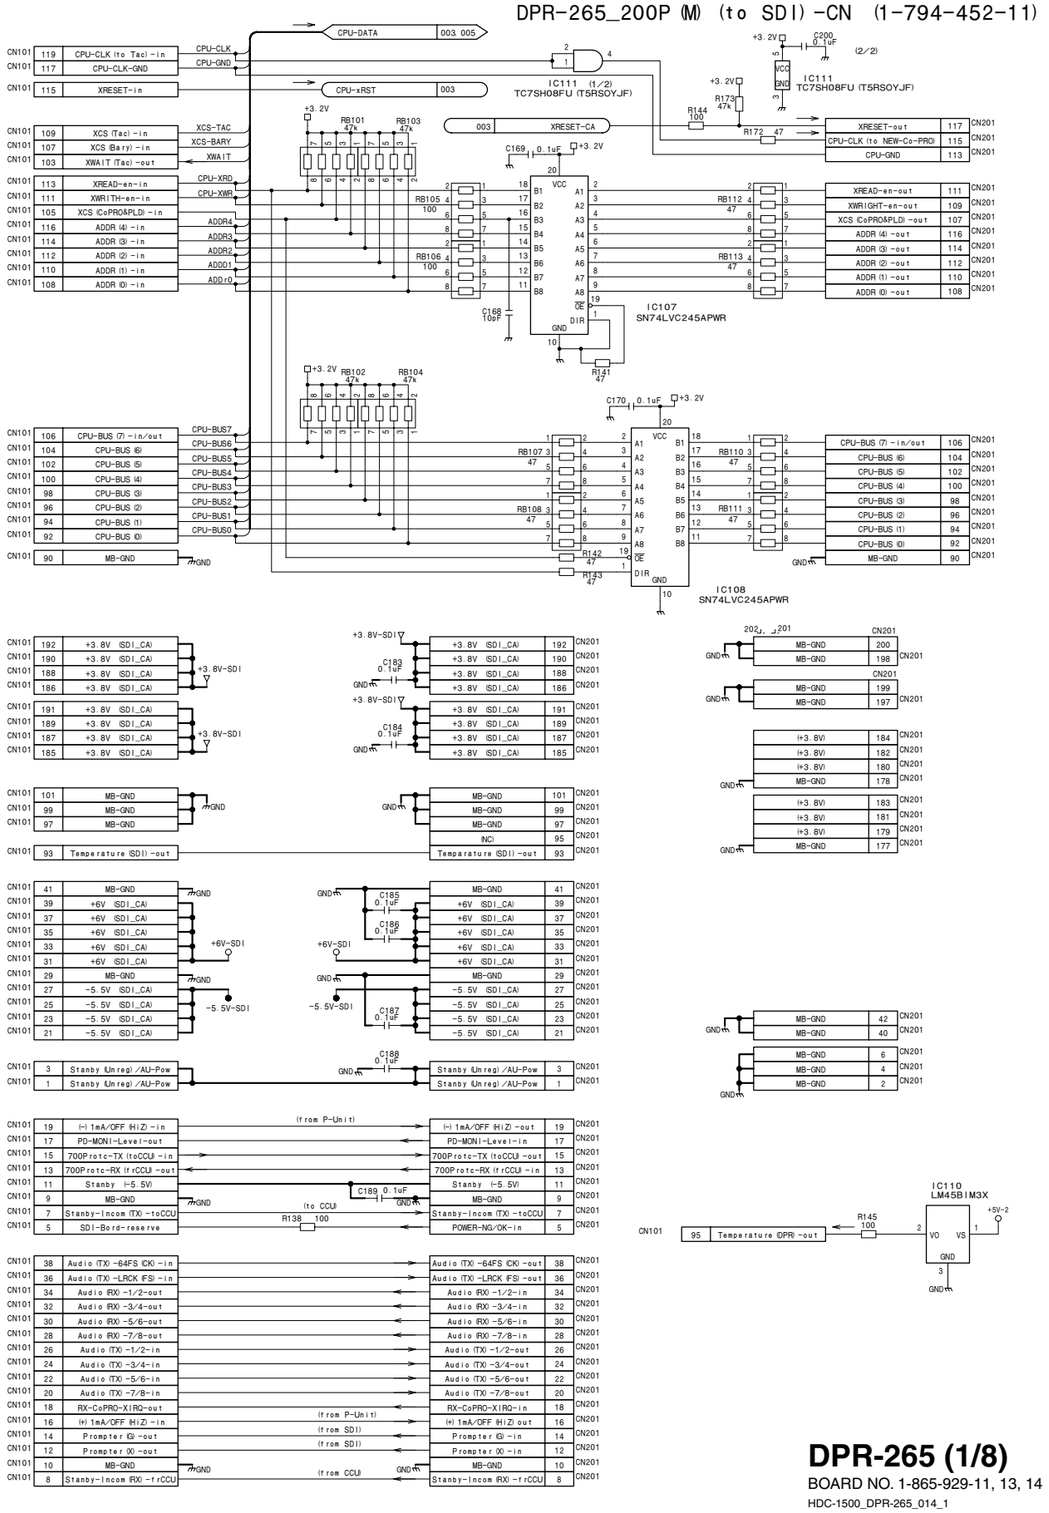





# DPR-265 (2/8)

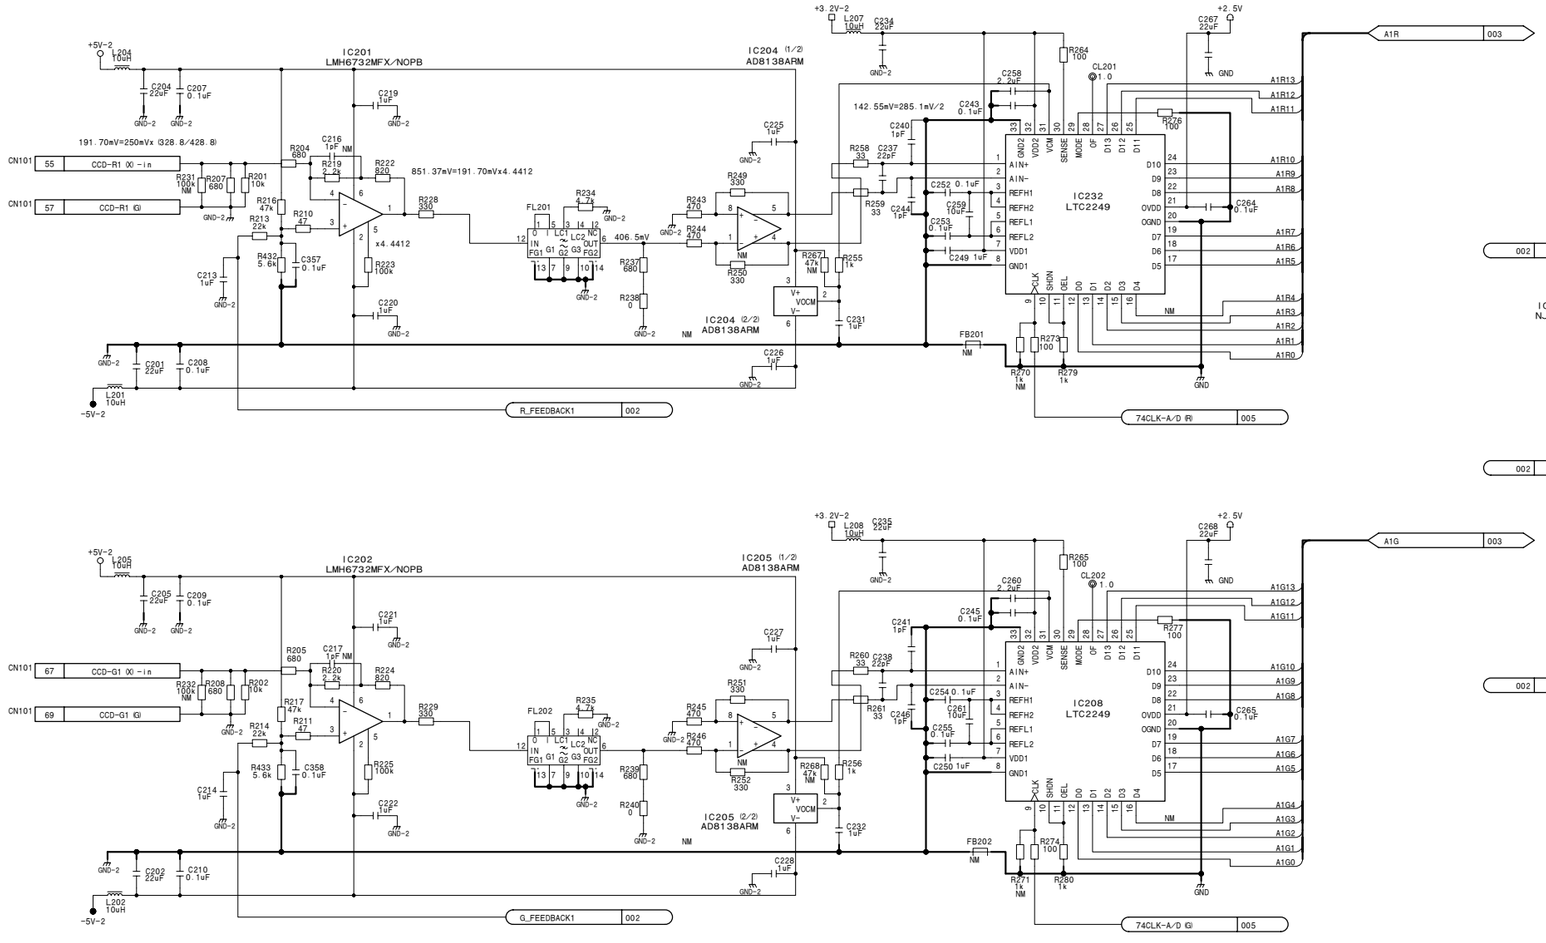BOARD NO. 1-865-929-11, 13, 14

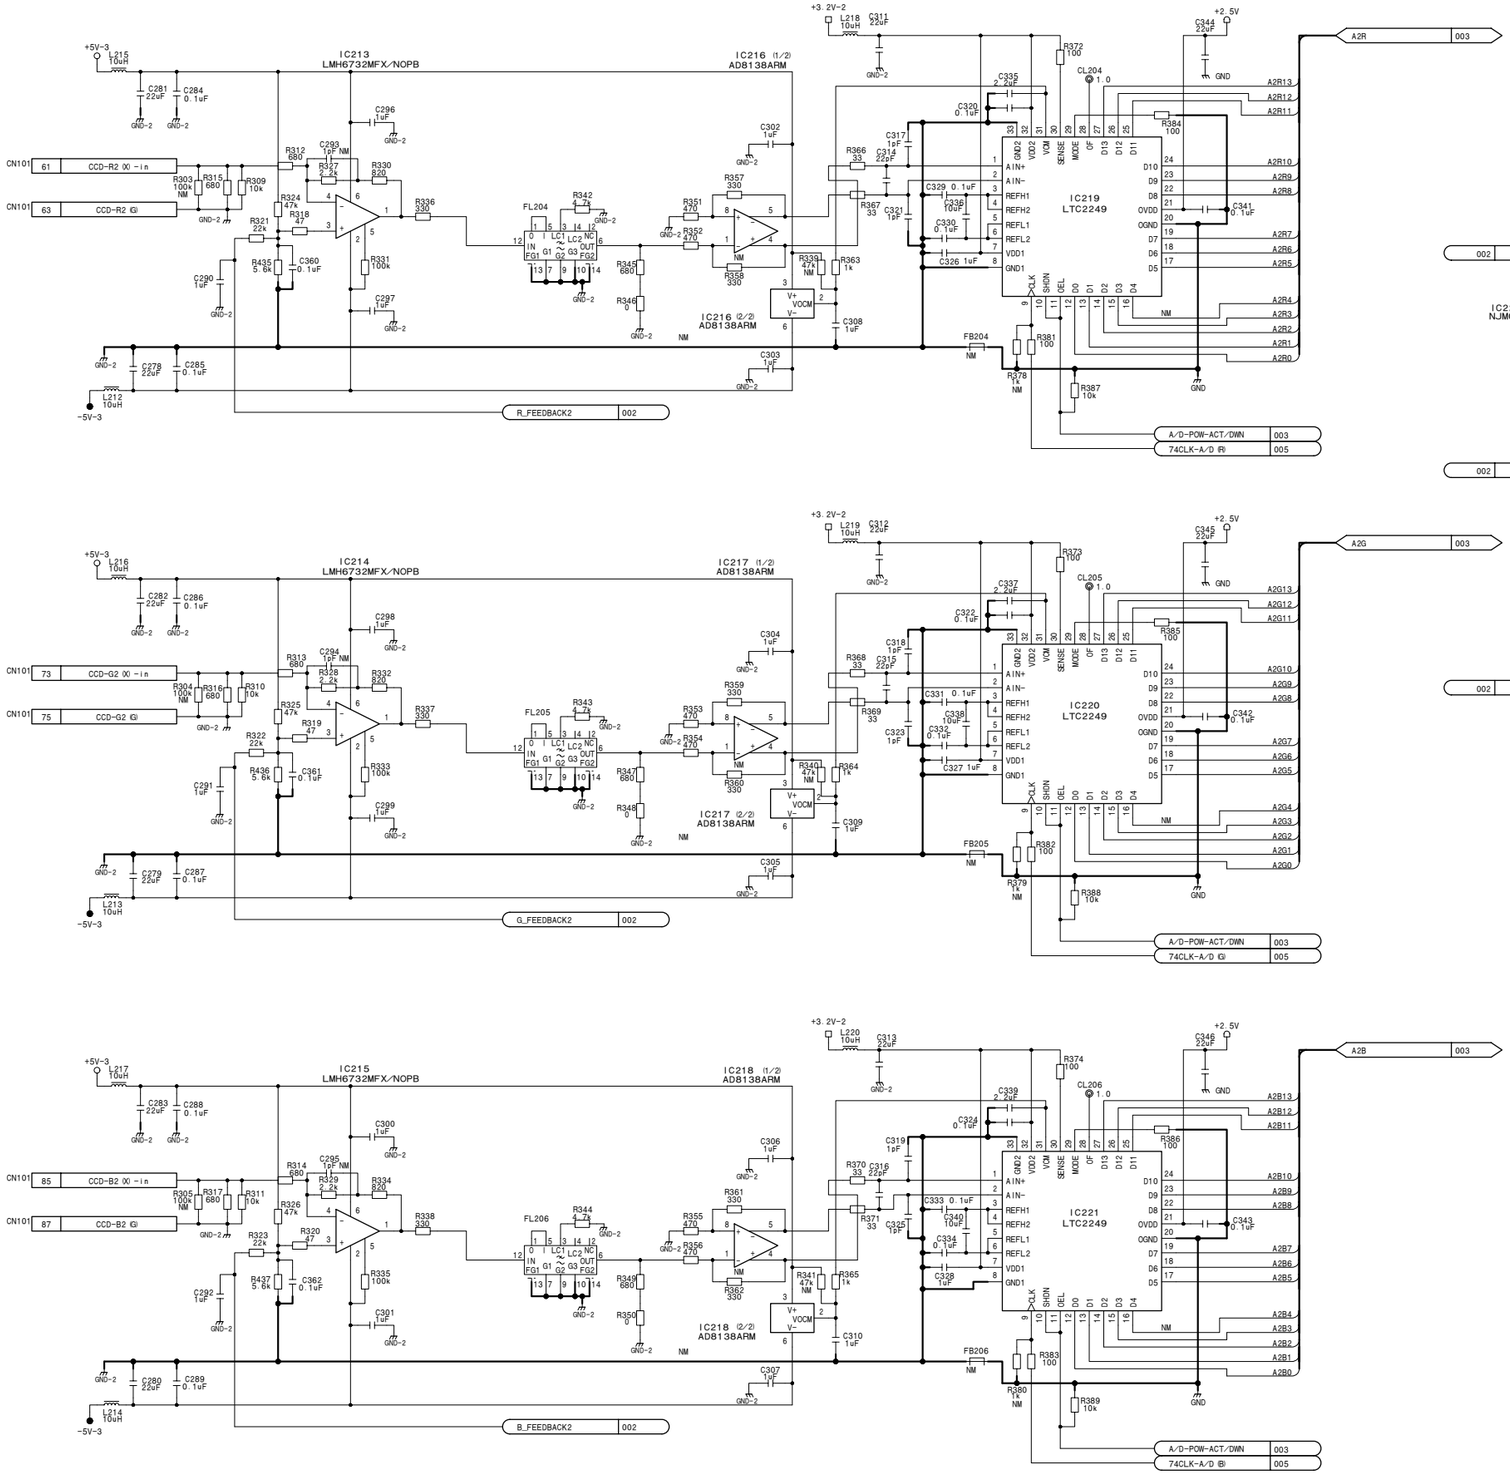HDC-1500_DPR-265_012_2

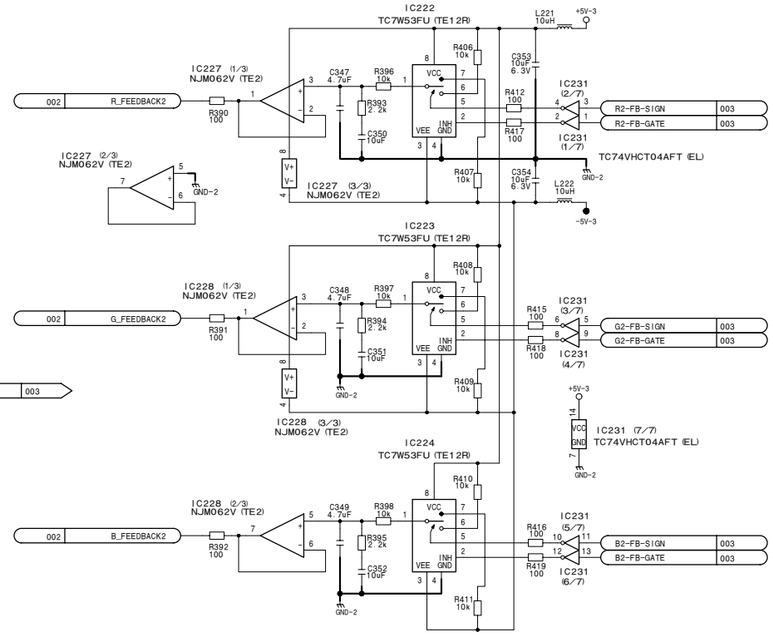**DPR-265 (3/8)**
**SUFFIX: -11, 13, 14**

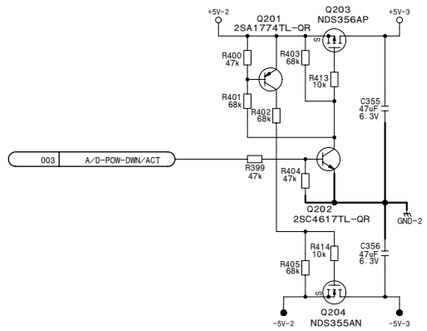



4-40

# DPR-265 (3/8)

**SUFFIX: -11, 13, 14**

DPR-265 (3/8)
SUFFIX: -11, 13, 14




DPR-265 (3/8)

BOARD NO. 1-865-929-11, 13, 14

HDC-1500_DPR-265_014_3

DPR-265 (4/8)
SUFFIX: -11, 13, 14

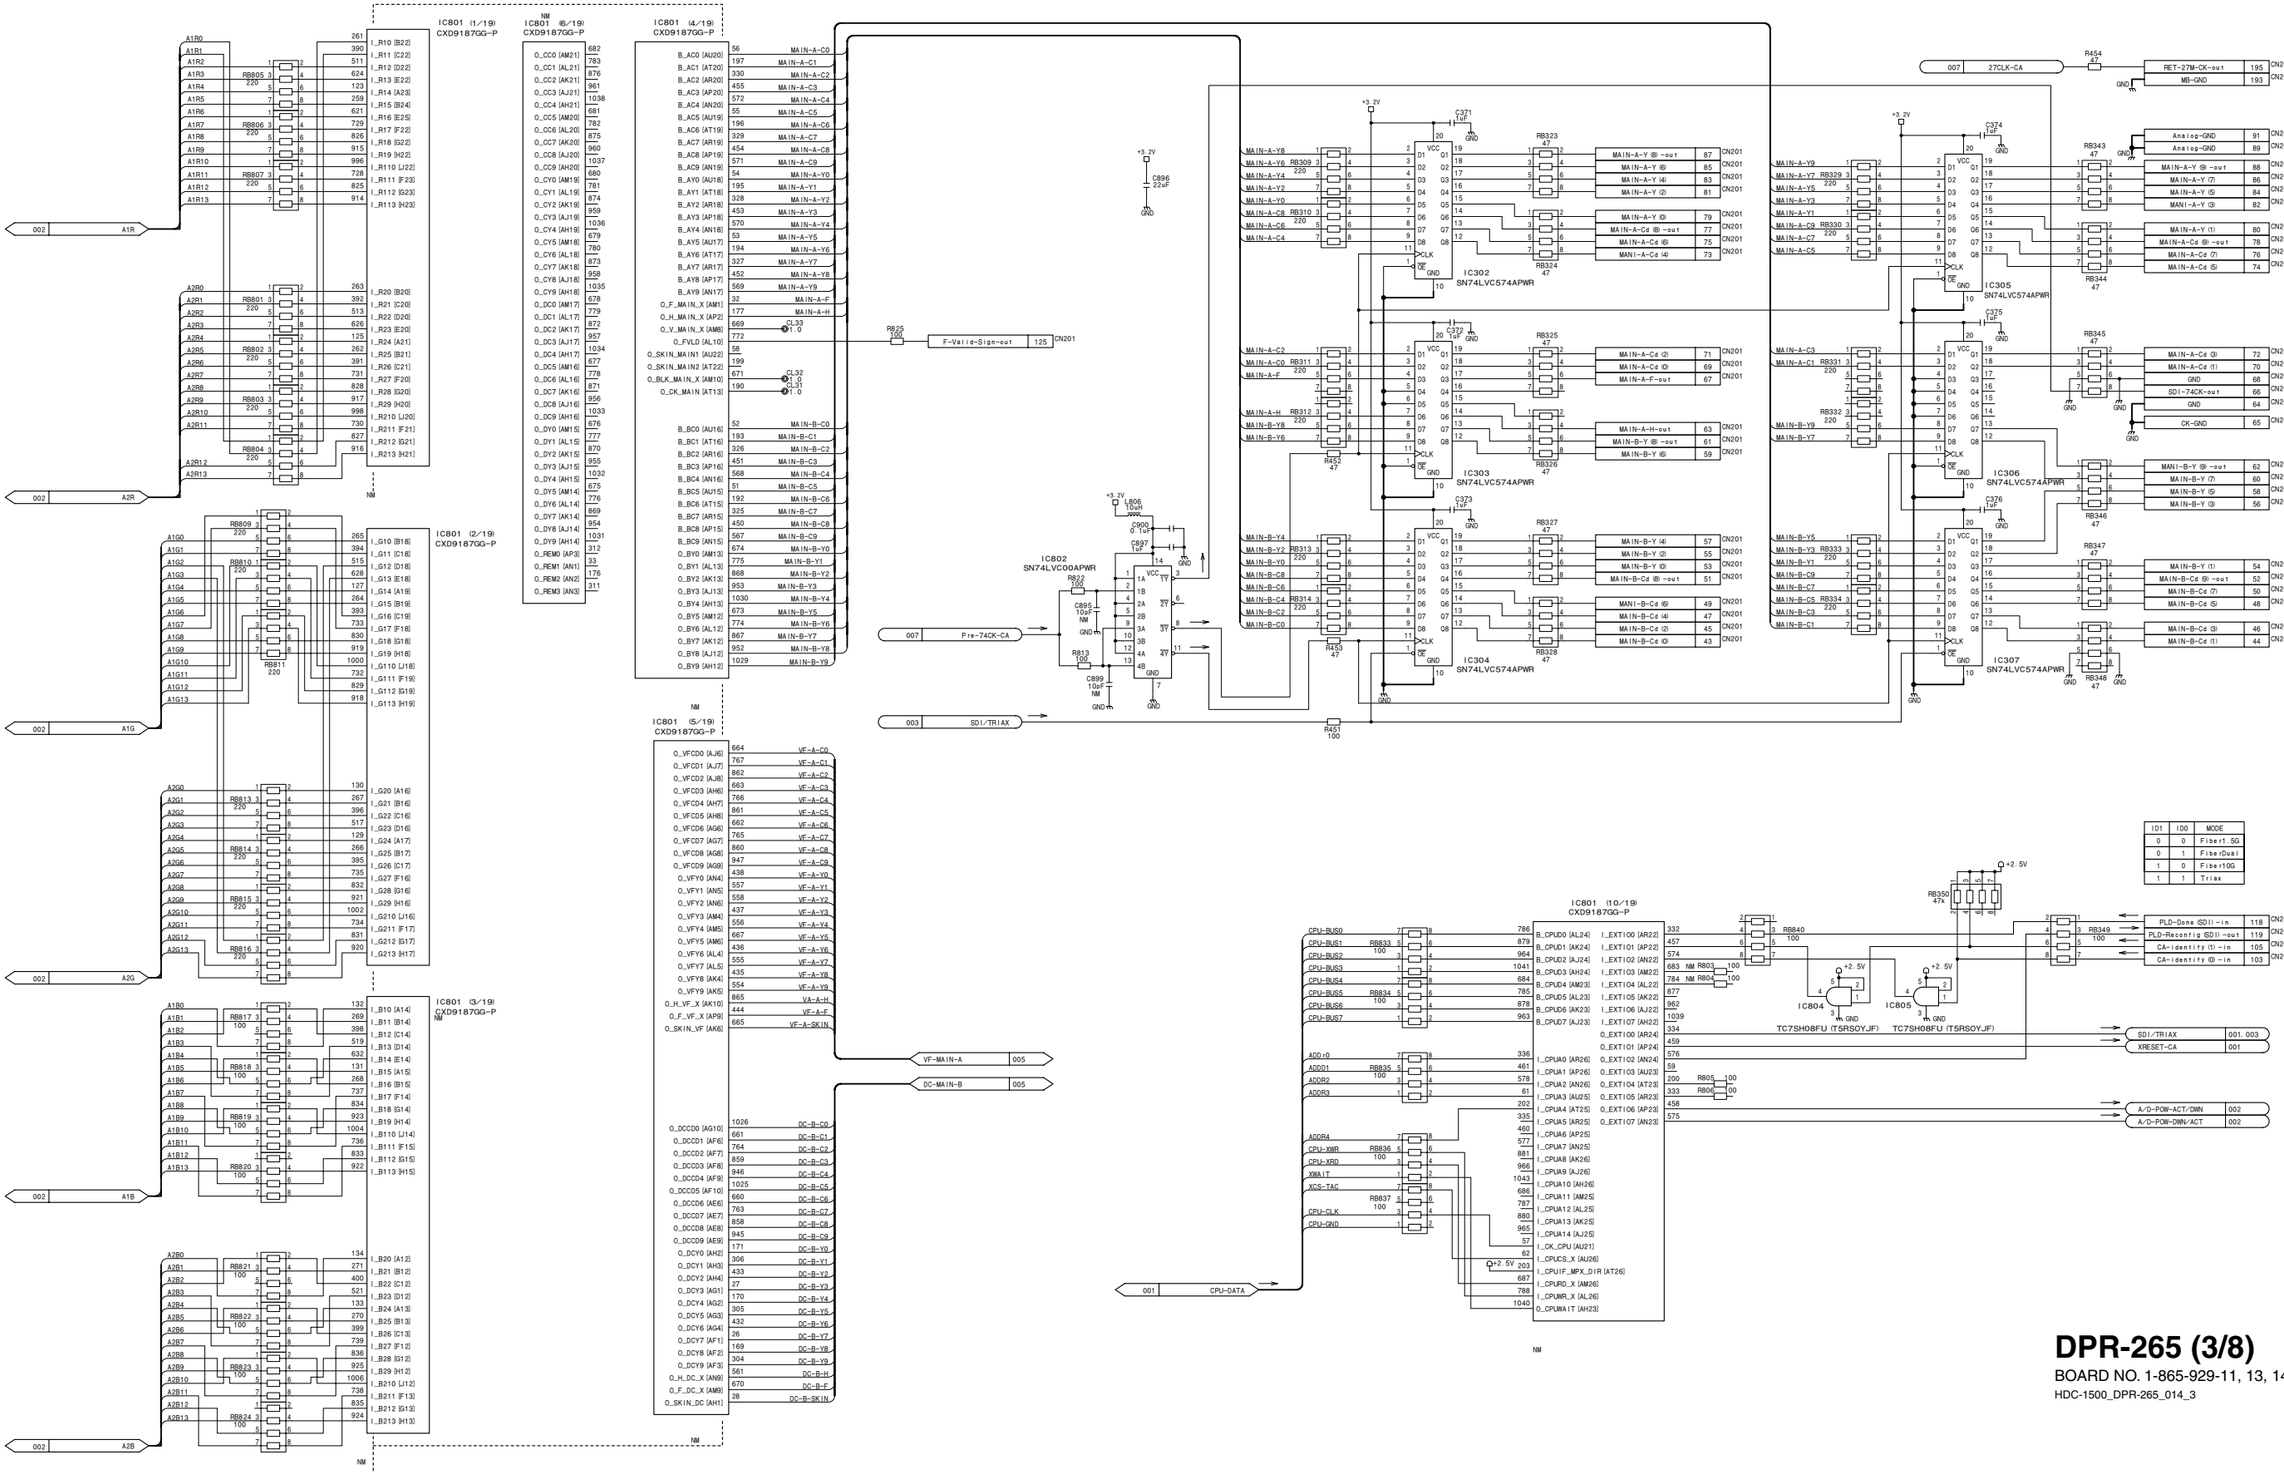




4-42

**DPR-265 (4/8)**
**SUFFIX: -11, 13, 14**

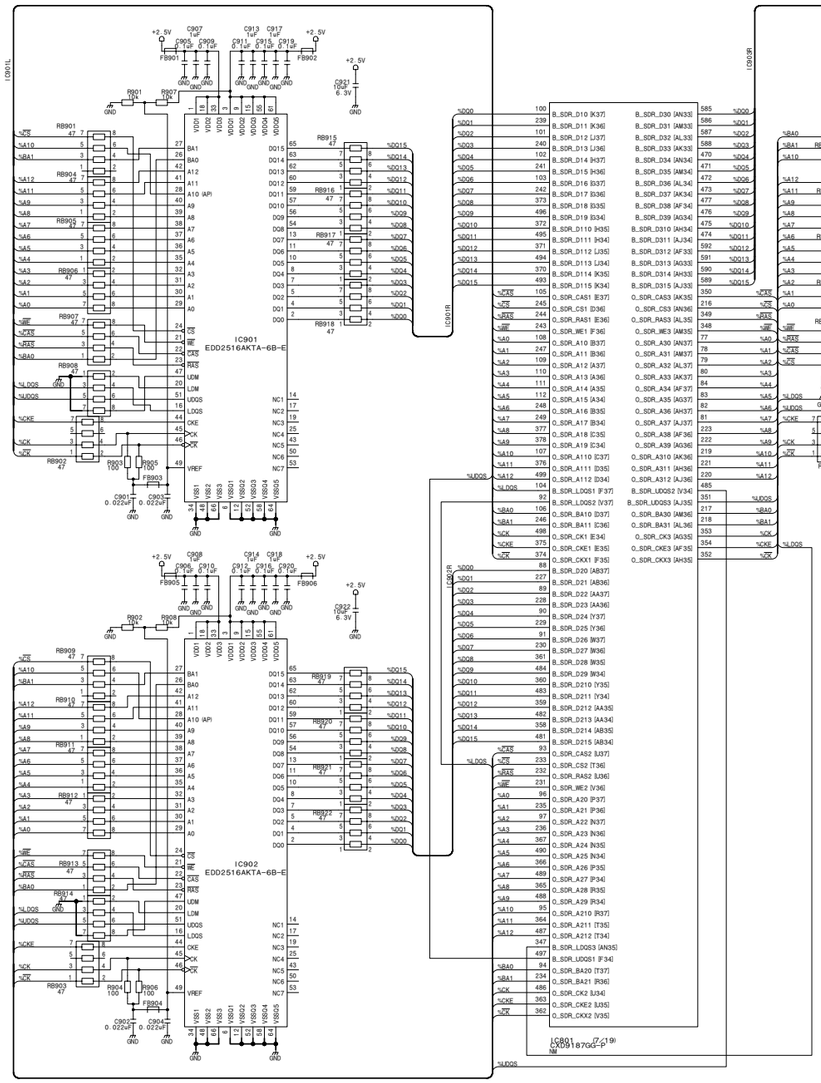


**DPR-265 (4/8)**
BOARD NO. 1-865-929-11, 13, 14
HDC-1500_DPR-265_012_4

**DPR-265 (5/8)**
**SUFFIX: -11, 13, 14**






**DPR-265 (5/8)**
**SUFFIX: -11, 13, 14**

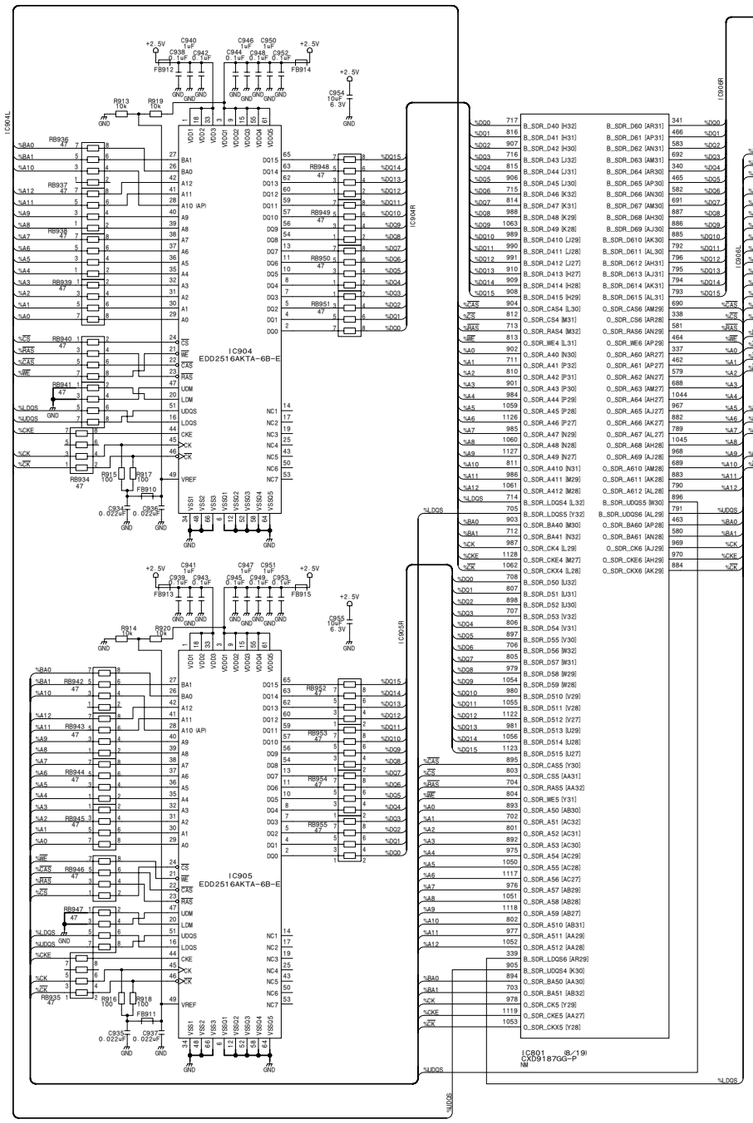




**DPR-265 (5/8)**

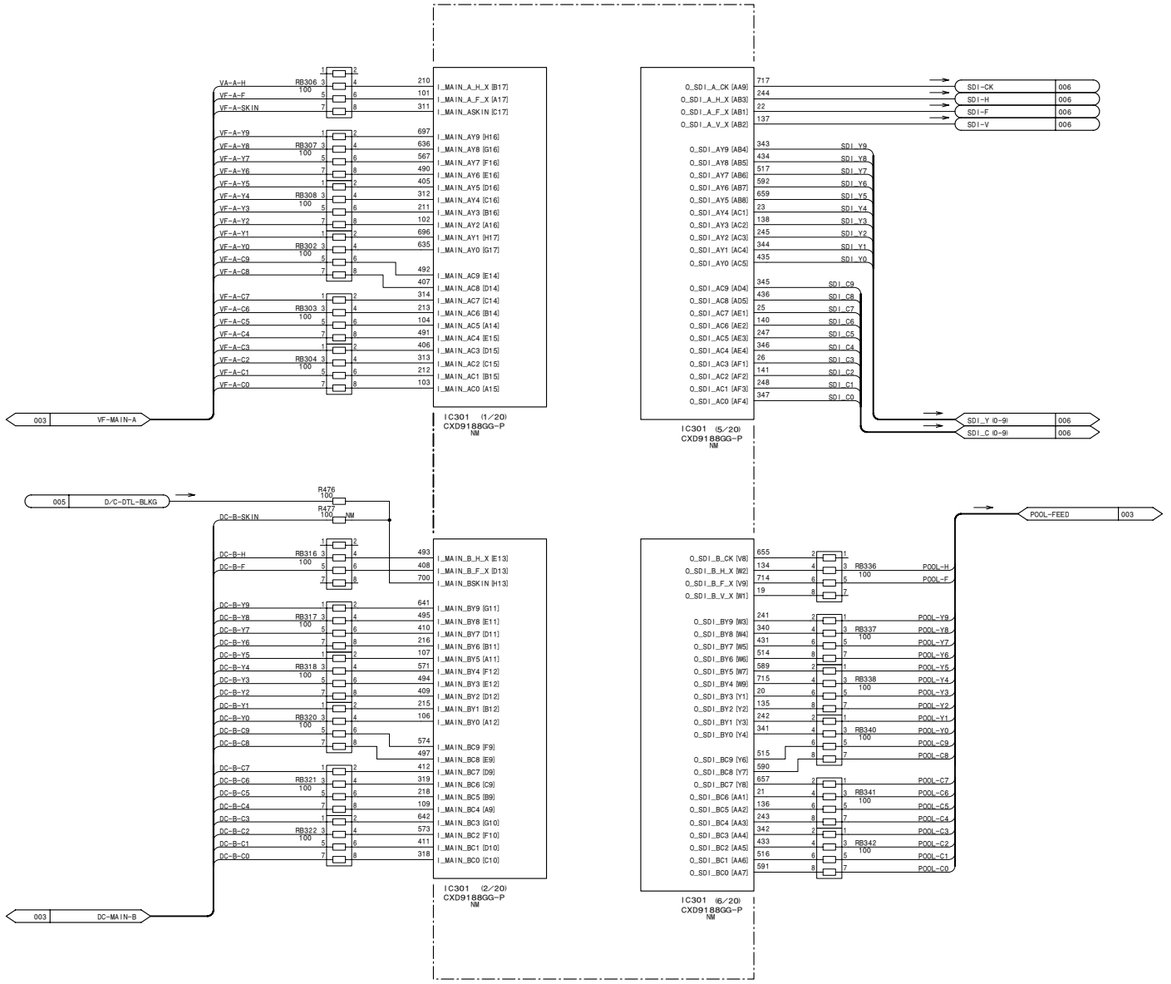BOARD NO. 1-865-929-11, 13, 14

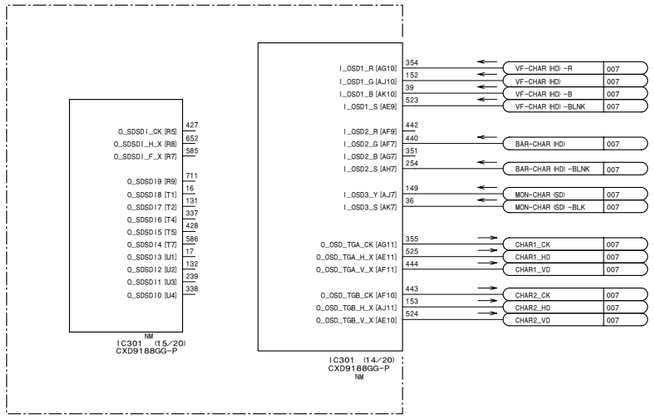HDC-1500_DPR-265_014_5

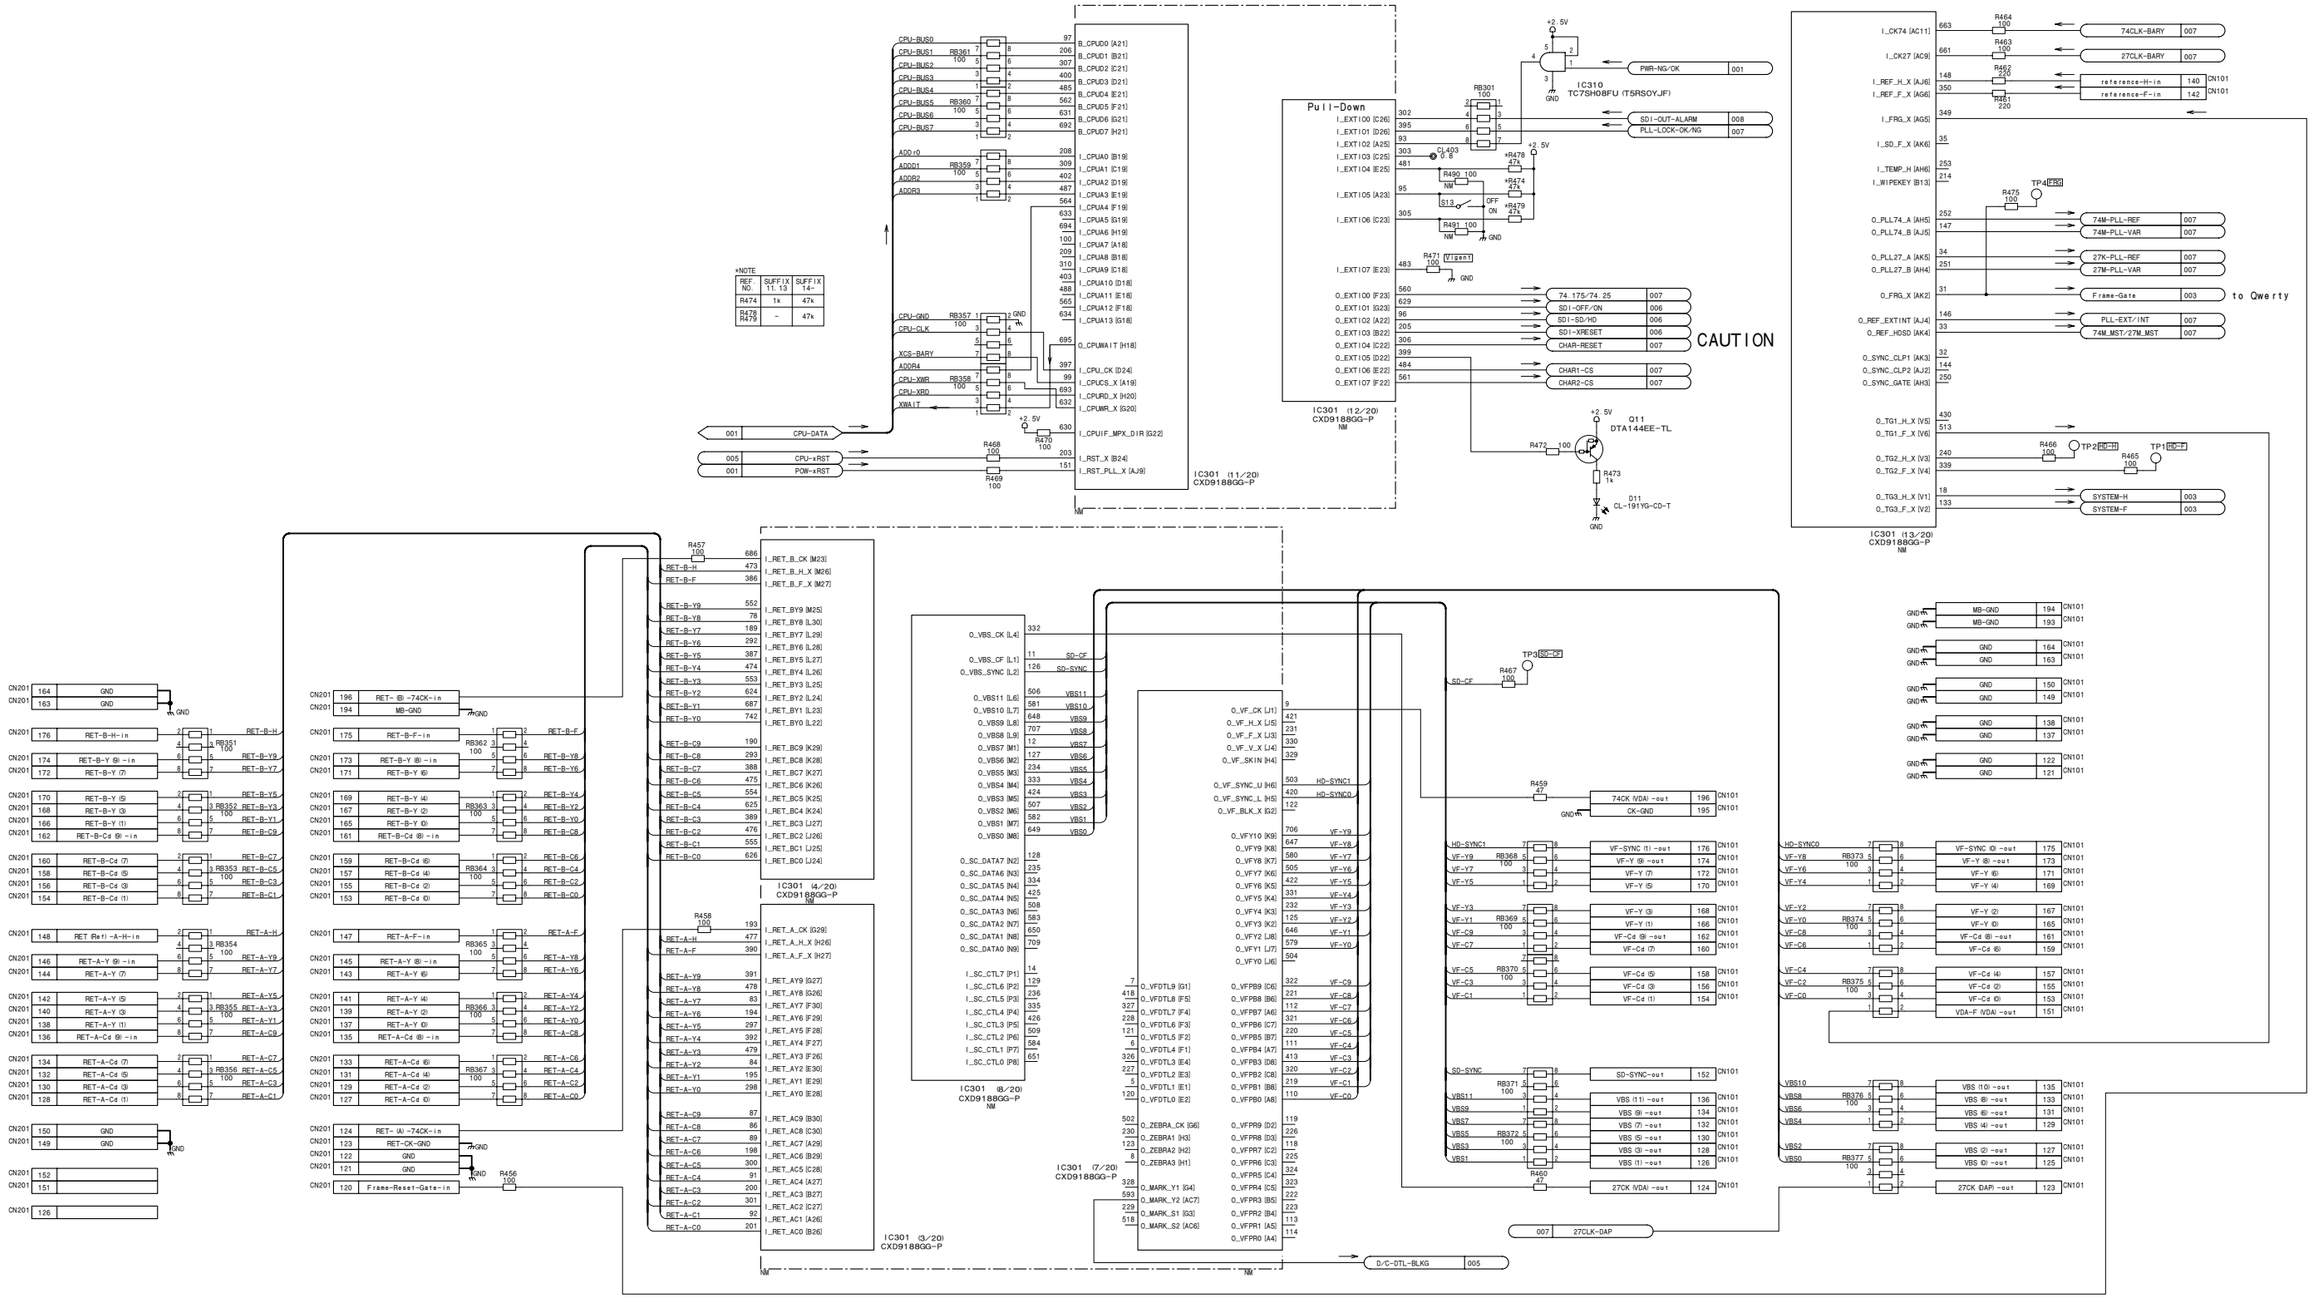DPR-265 (6/8)
SUFFIX: -11, 13, 14
















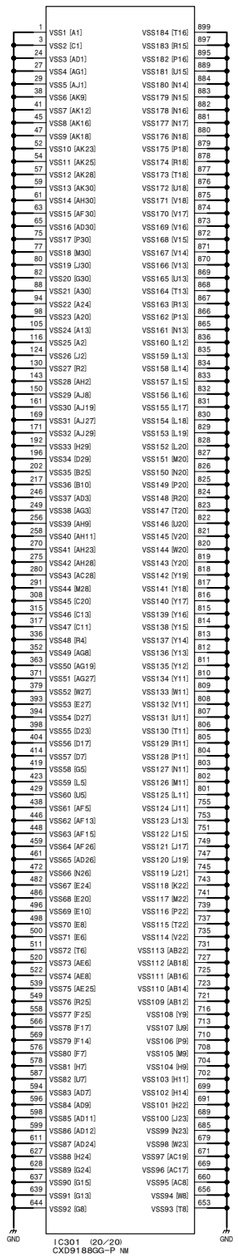


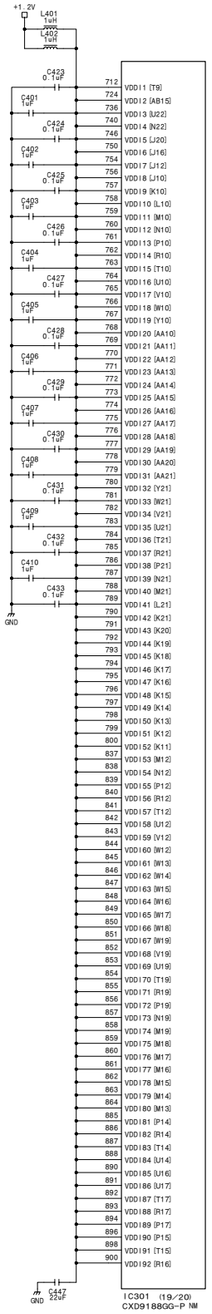


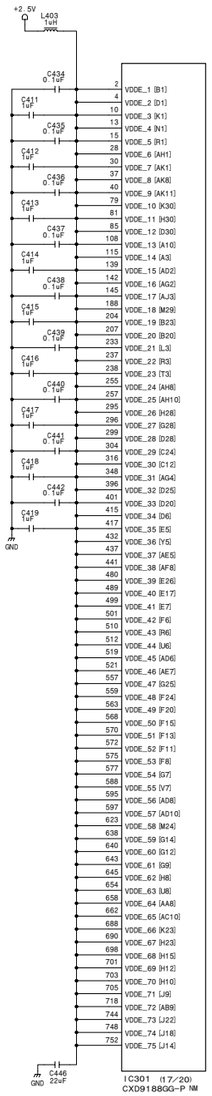*NOTE
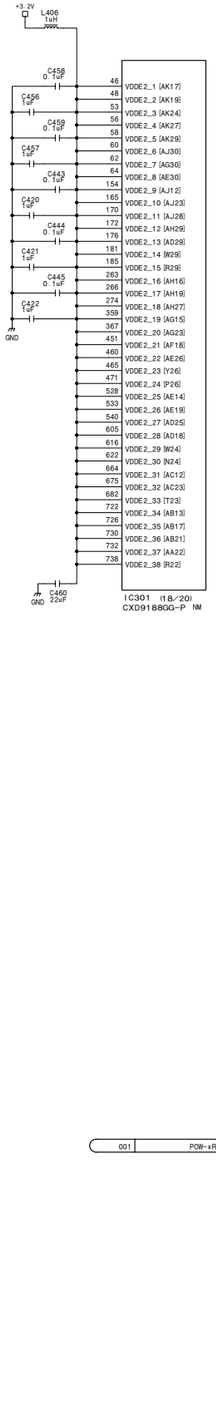
| REF NO. | SUFFIX 11 | SUFFIX 13- |
|---|---|---|
| IC403 | IS42S 32200B -6TL-TR | - |
| IC405 | - | IS42S 32200C1 -6TL-TR |

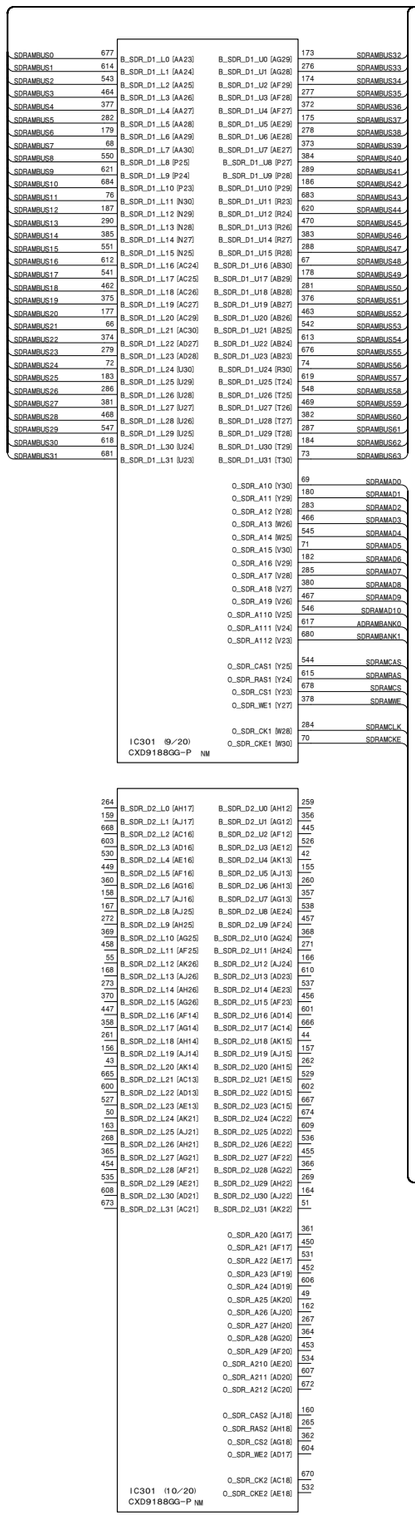DPR-265 (6/8)
BOARD NO. 1-865-929-11, 13, 14
HDC-1500_DPR-265_014_6

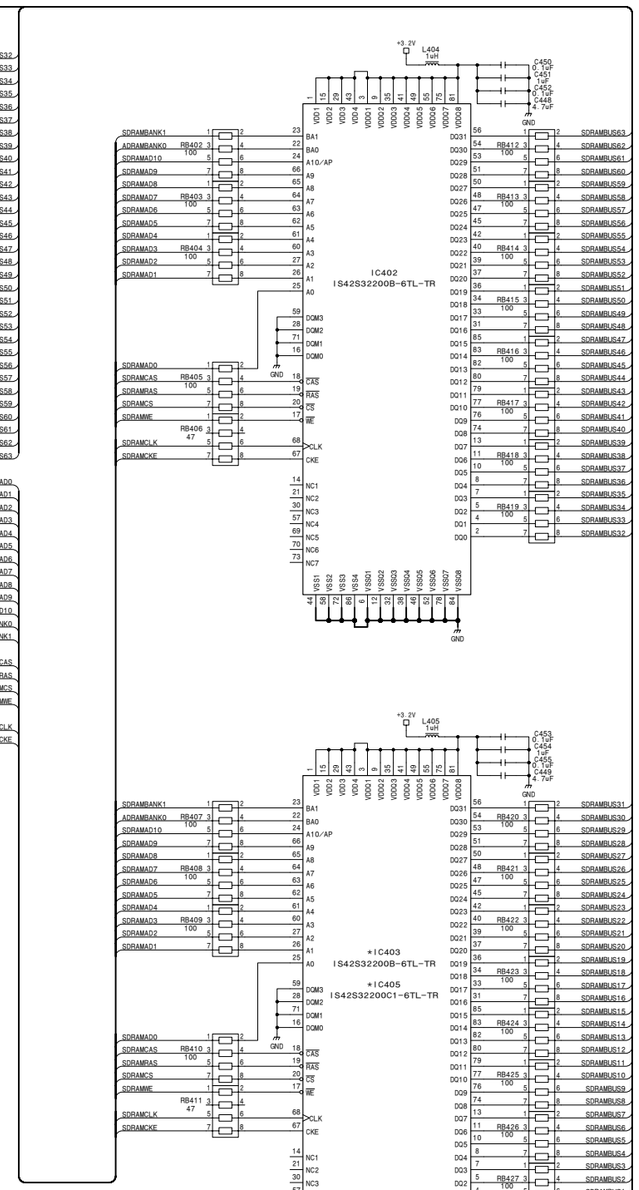**DPR-265 (7/8)**
**SUFFIX: -11, 13, 14**

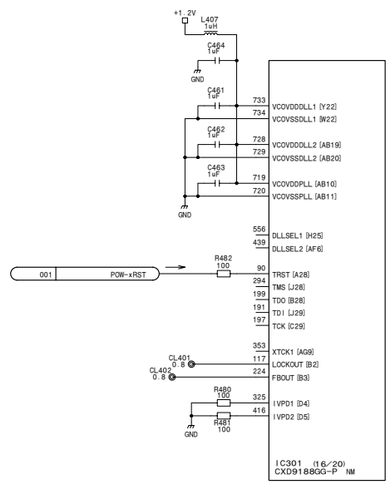




**DPR-265 (7/8)**
BOARD NO. 1-865-929-11, 13, 14
HDC-1500_DPR-265_012_7

**DPR-265 (8/8)**
**SUFFIX: -11, 13, 14**

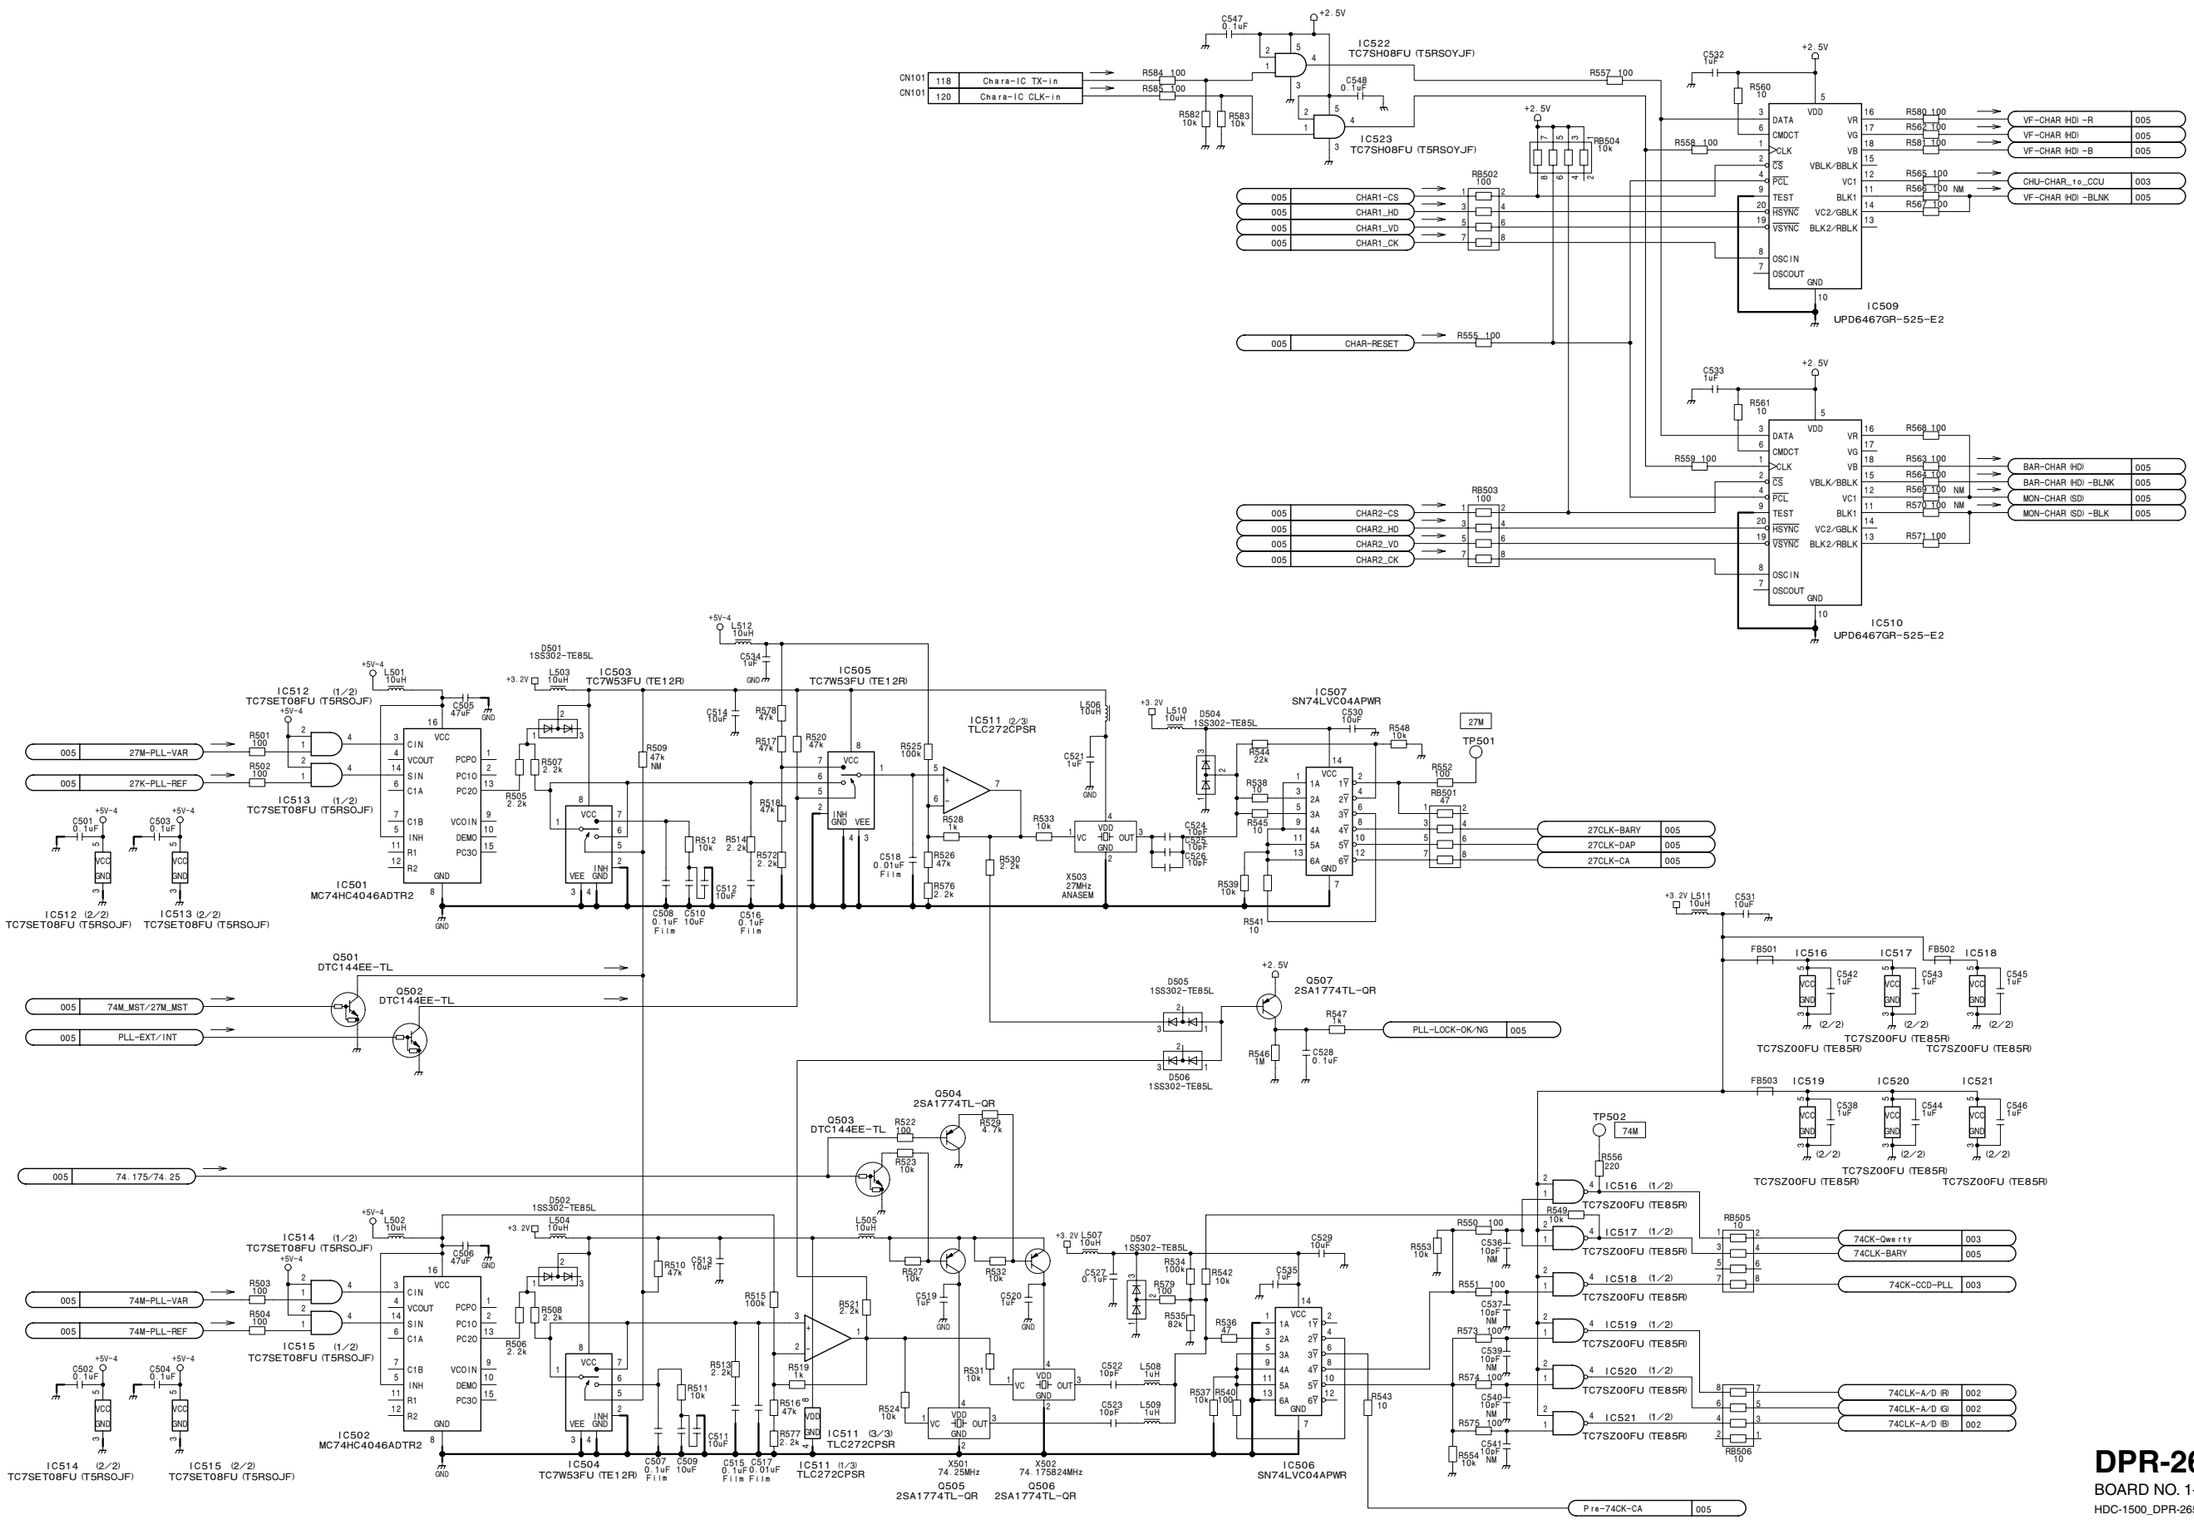


# DPR-265 (8/8)

BOARD NO. 1-865-929-11, 13, 14

HDC-1500_DPR-265_012_8

**DPR-265C (1/8)**
**SUFFIX: -14**
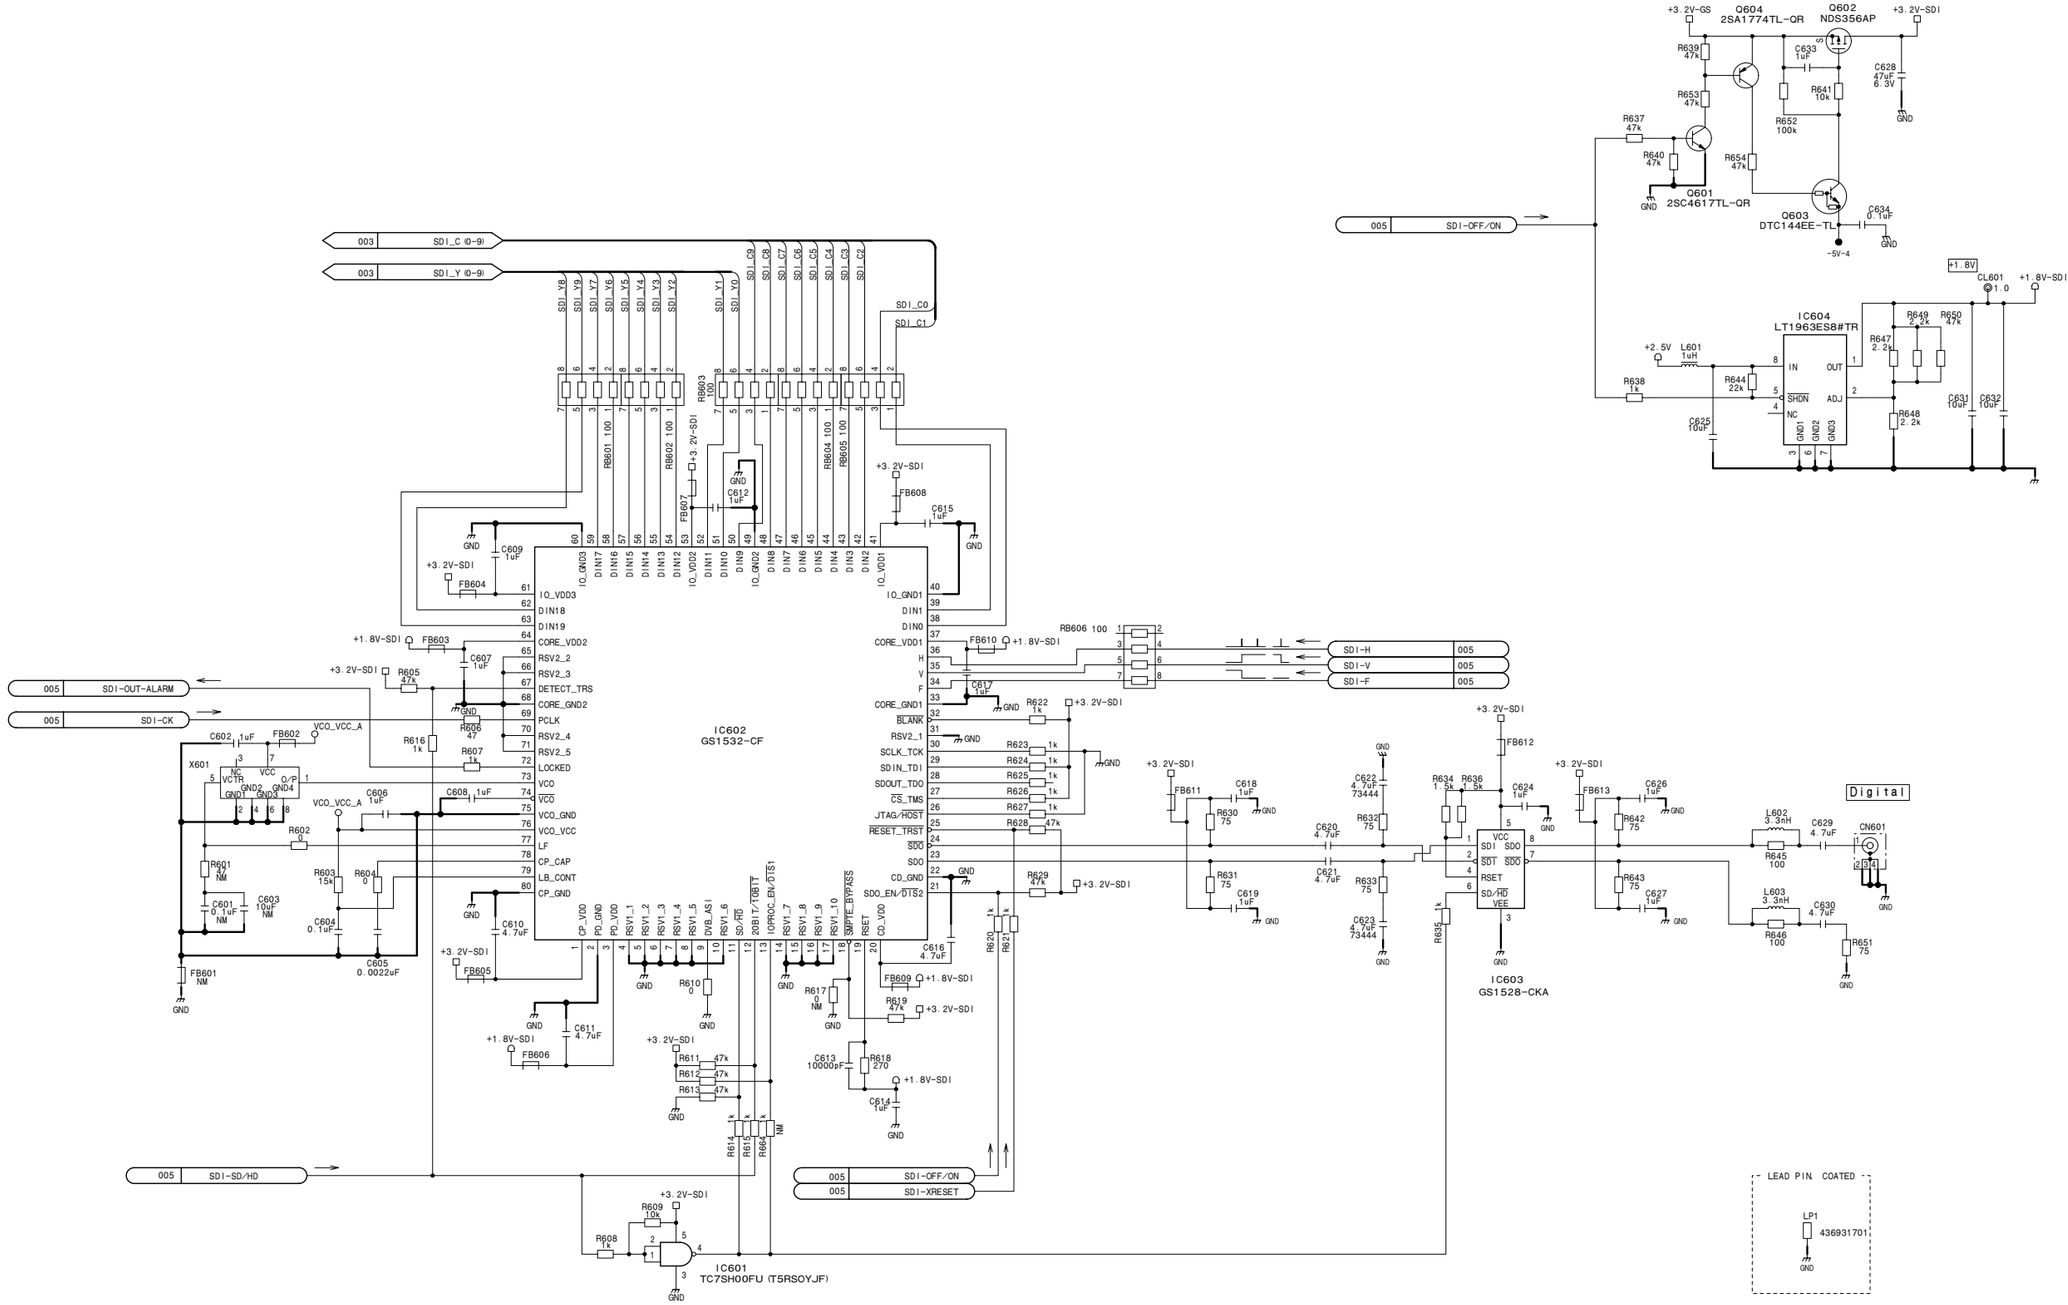
## DPR-264_200P (F) (to MB)-CN (1-794-239-11)




## DPR-265_200P (M) (to SDI)-CN (1-794-452-11)






4-49

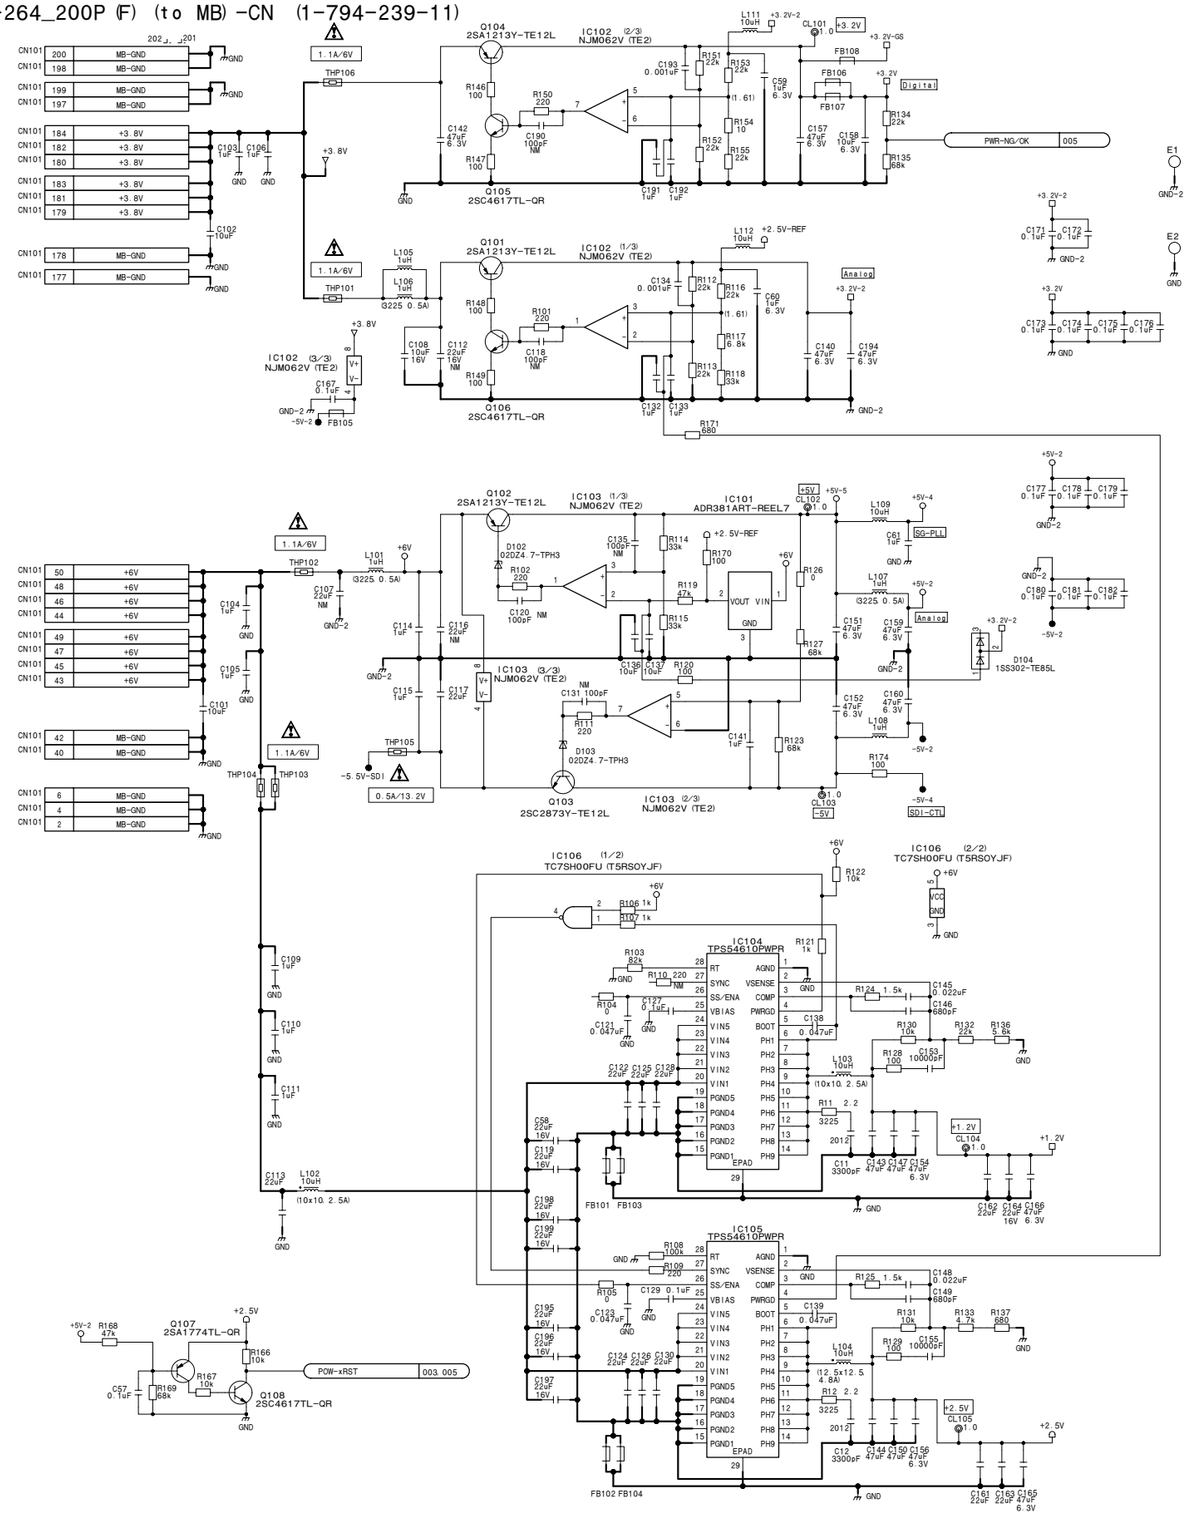**DPR-265C (1/8)**
BOARD NO. 1-865-929-14
HDC-1500_DPR-265C_014_1

DPR-265C (2/8)
SUFFIX: -14

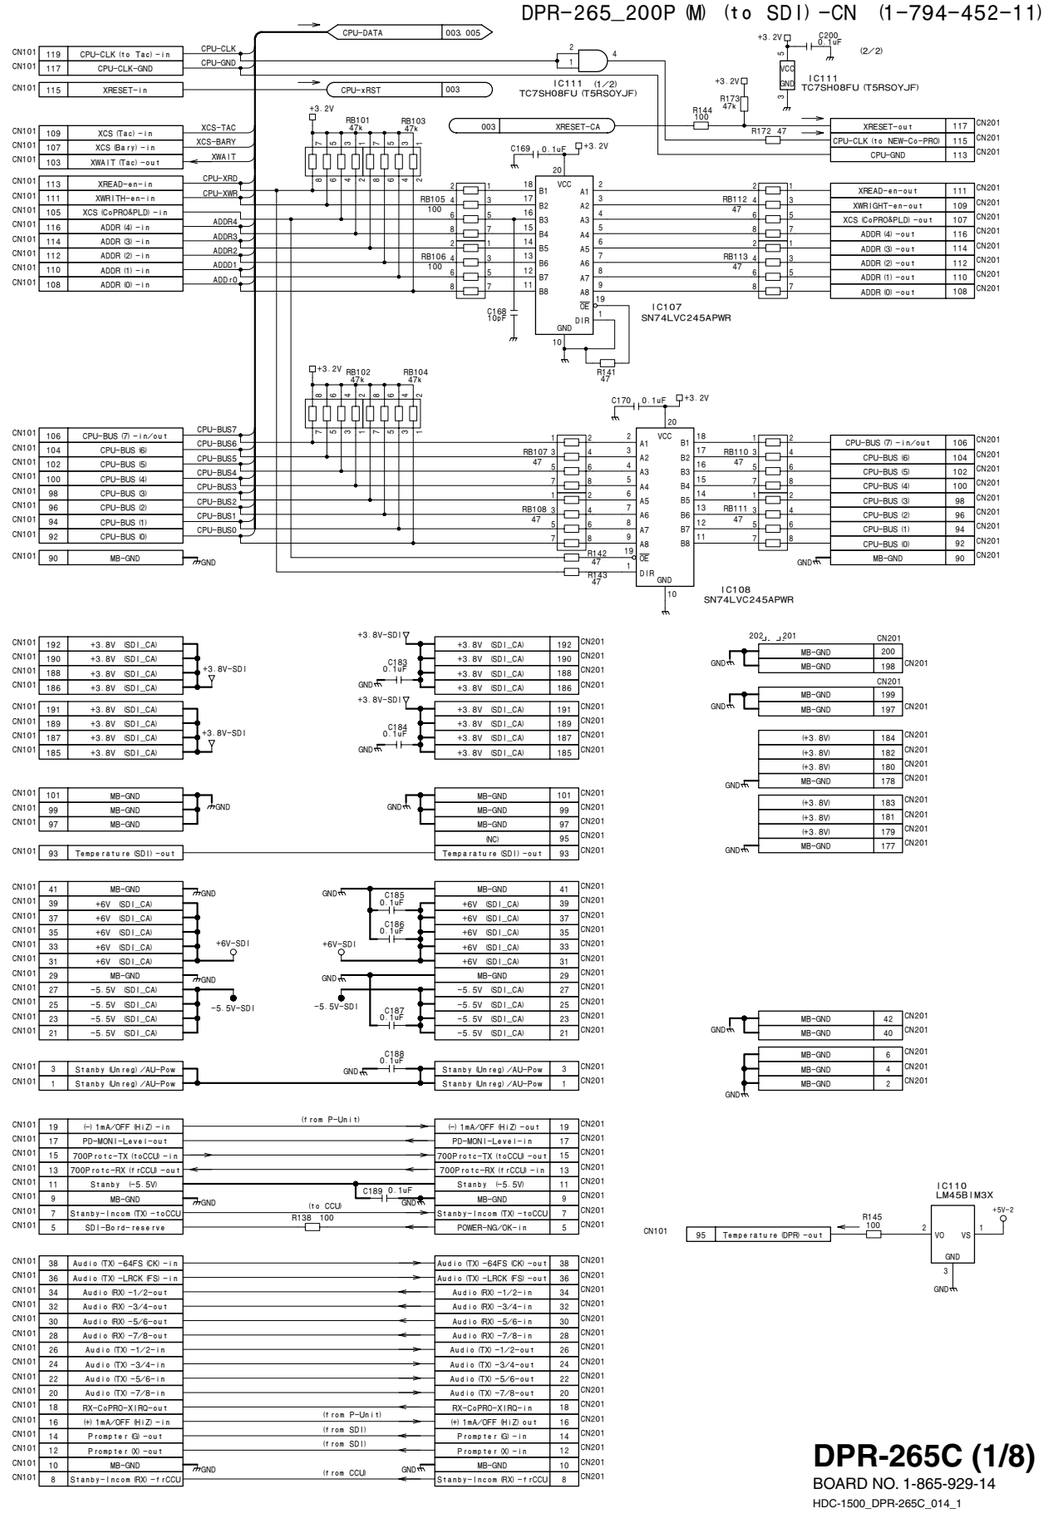

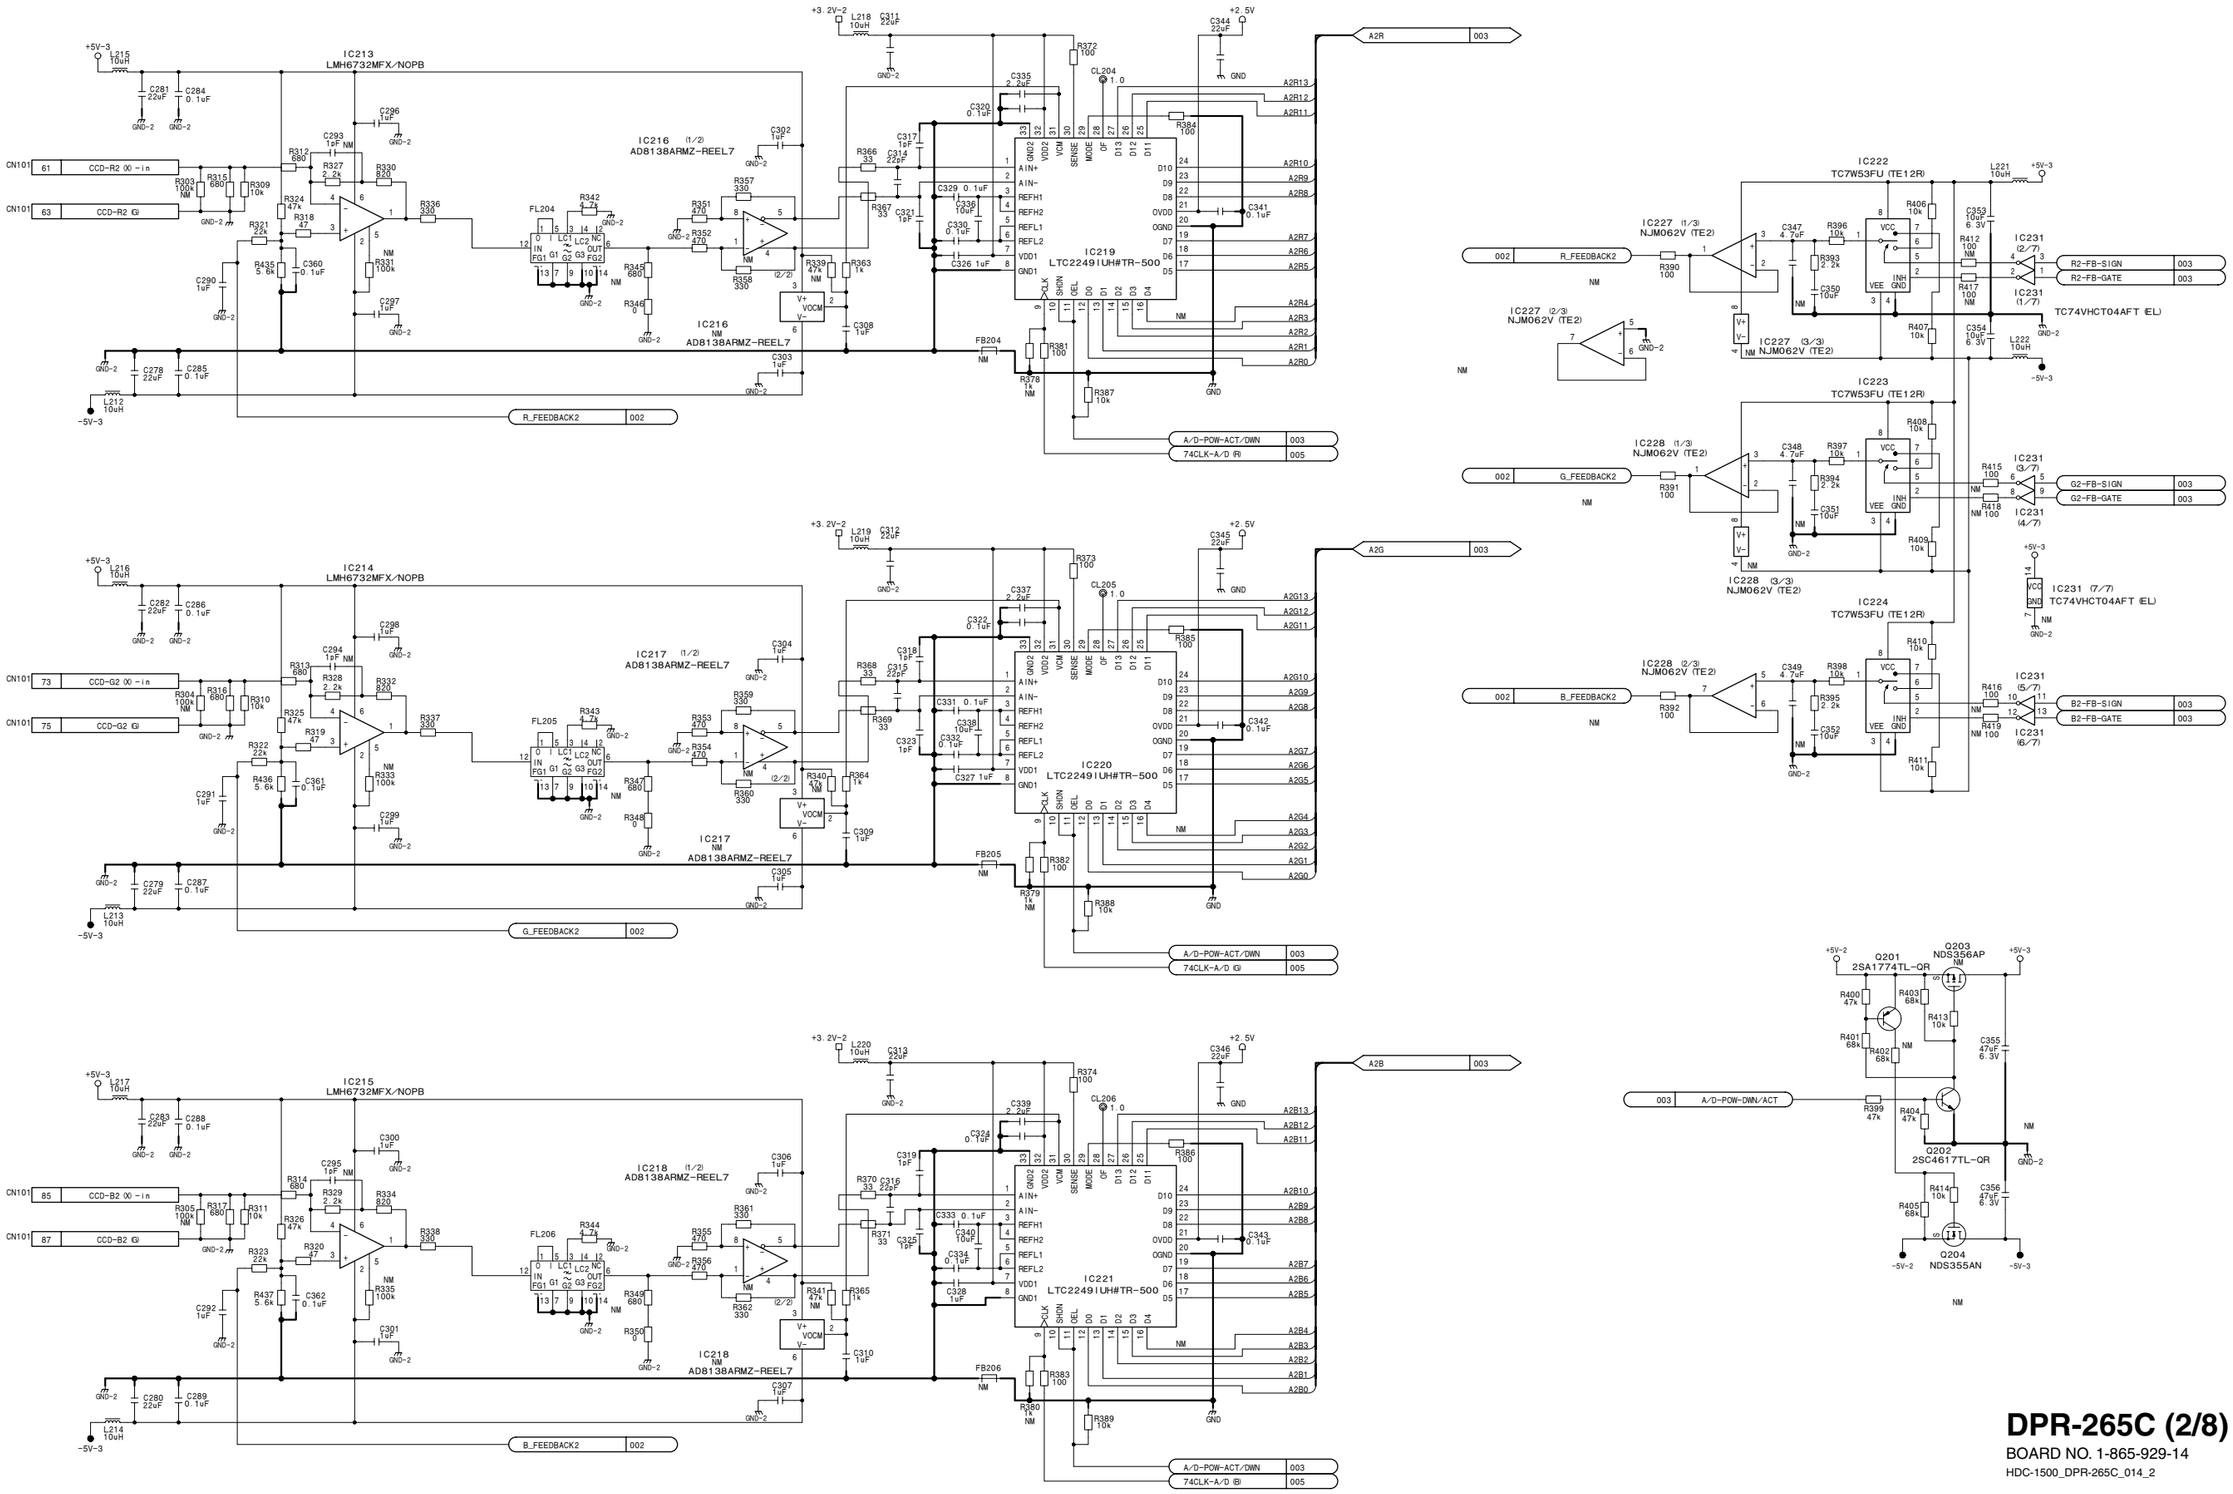


**DPR-265C (2/8)**
BOARD NO. 1-865-929-14
HDC-1500_DPR-265C_014_2

DPR-265C (3/8)
SUFFIX: -14


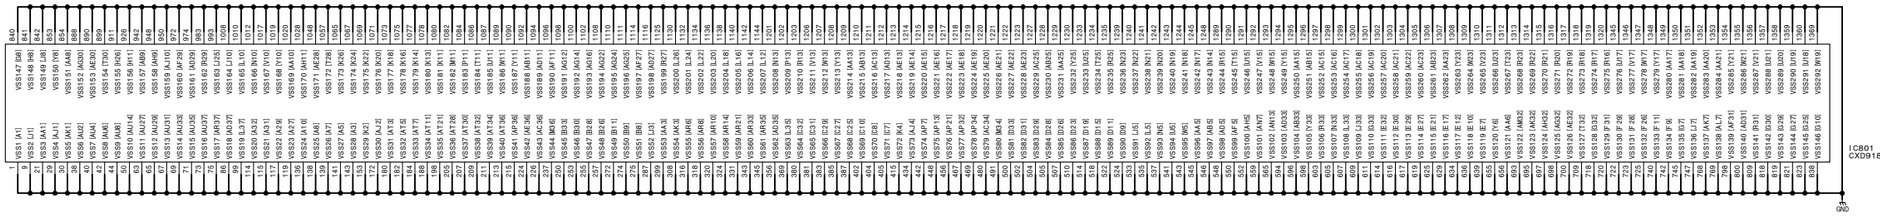





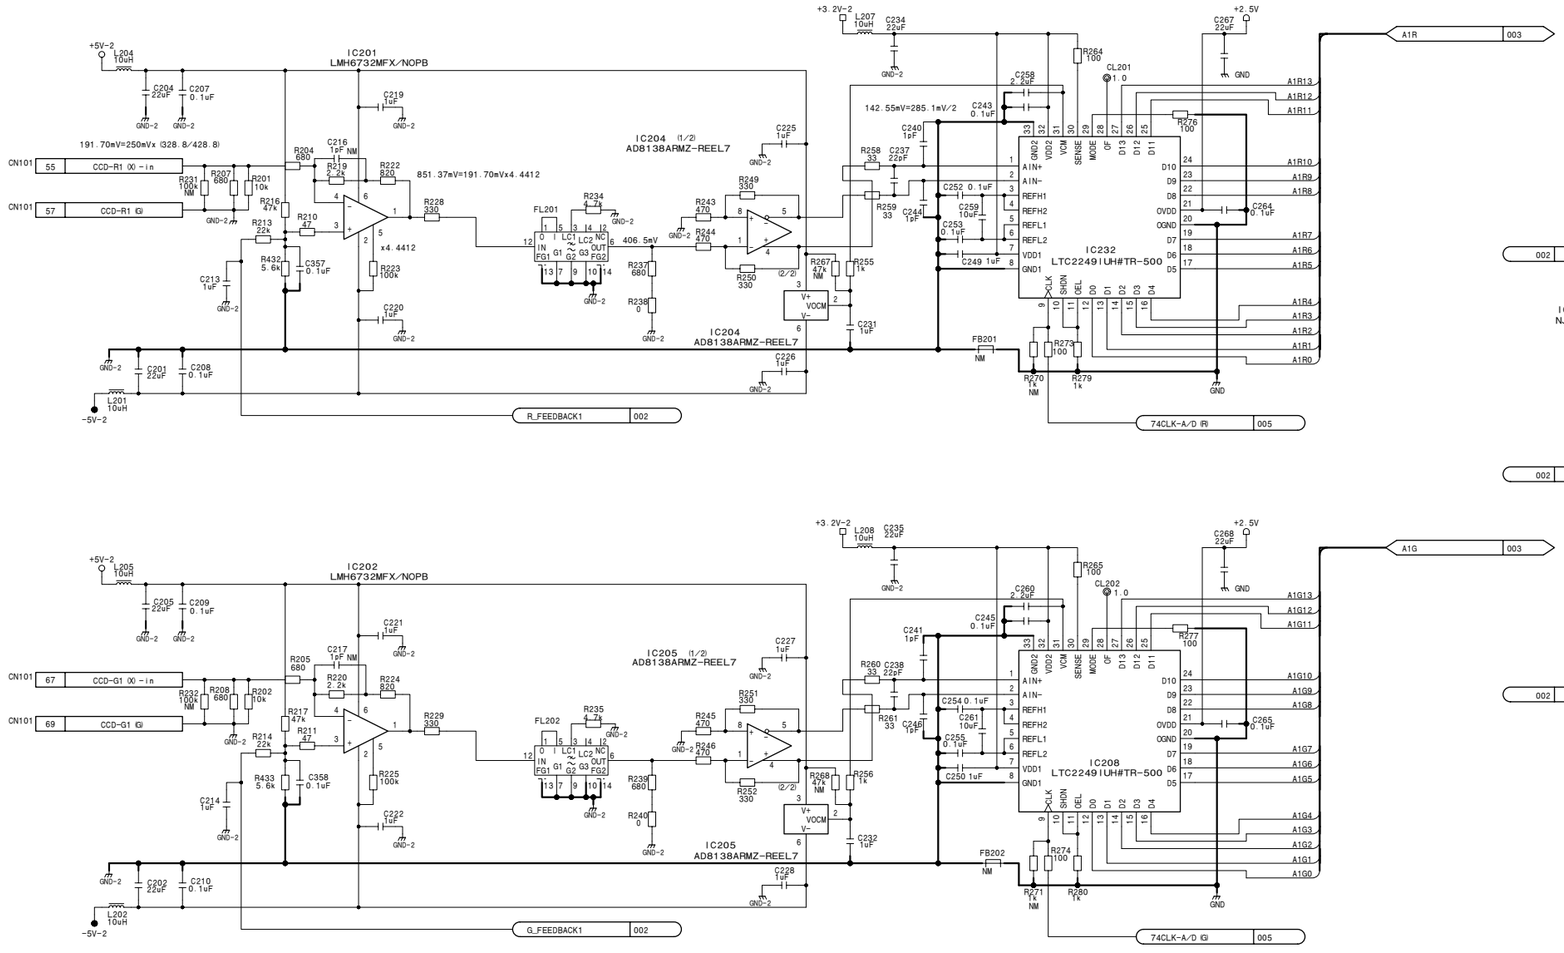








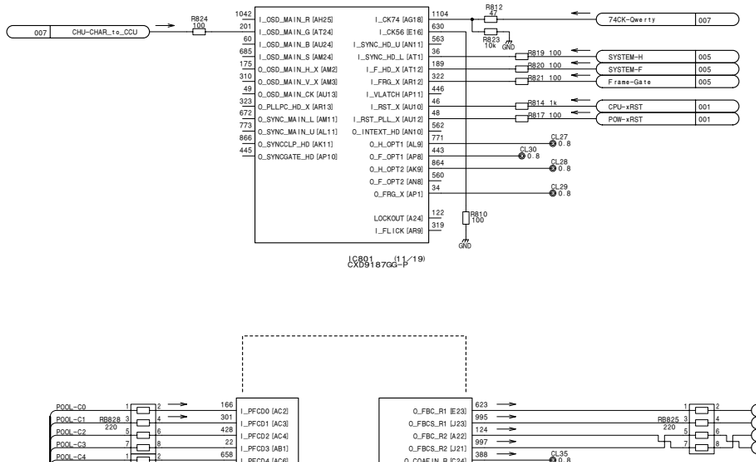


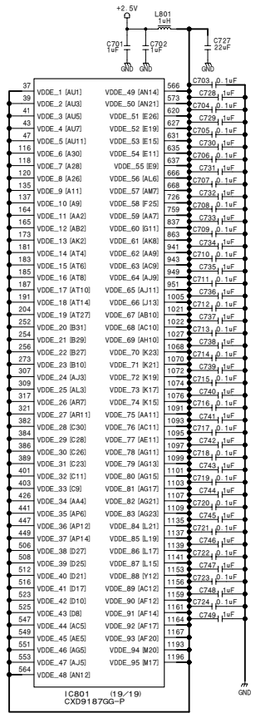


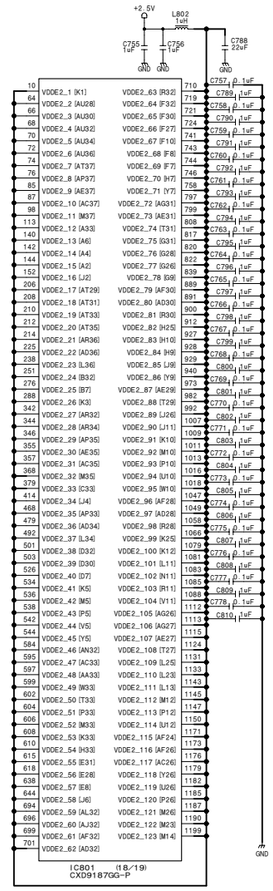

DPR-265C (3/8)
SUFFIX: -14

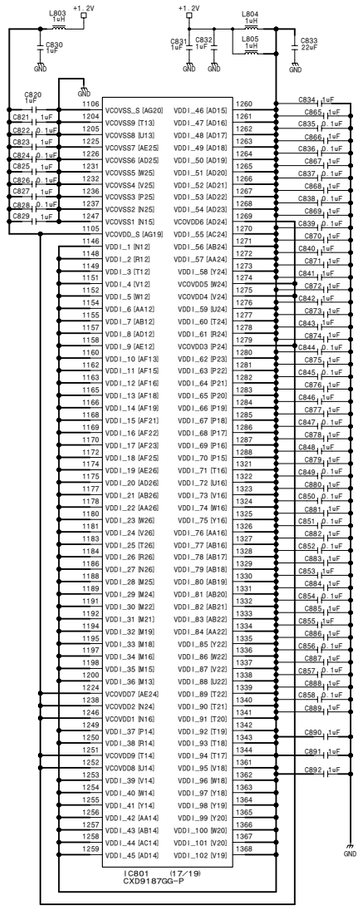


HDC1000/V2 (J, E)


4-53

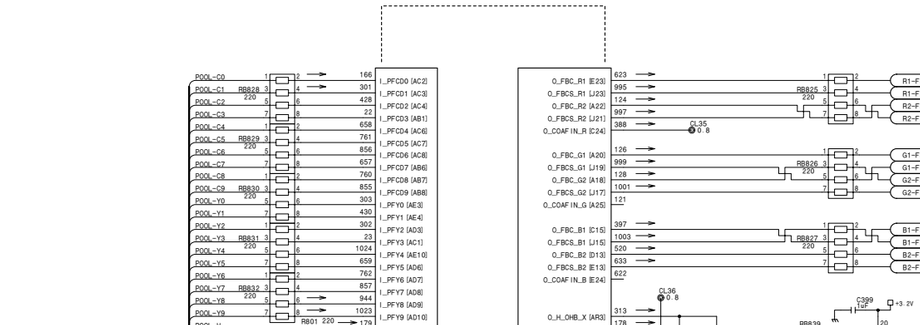DPR-265C (4/8)
SUFFIX: -14




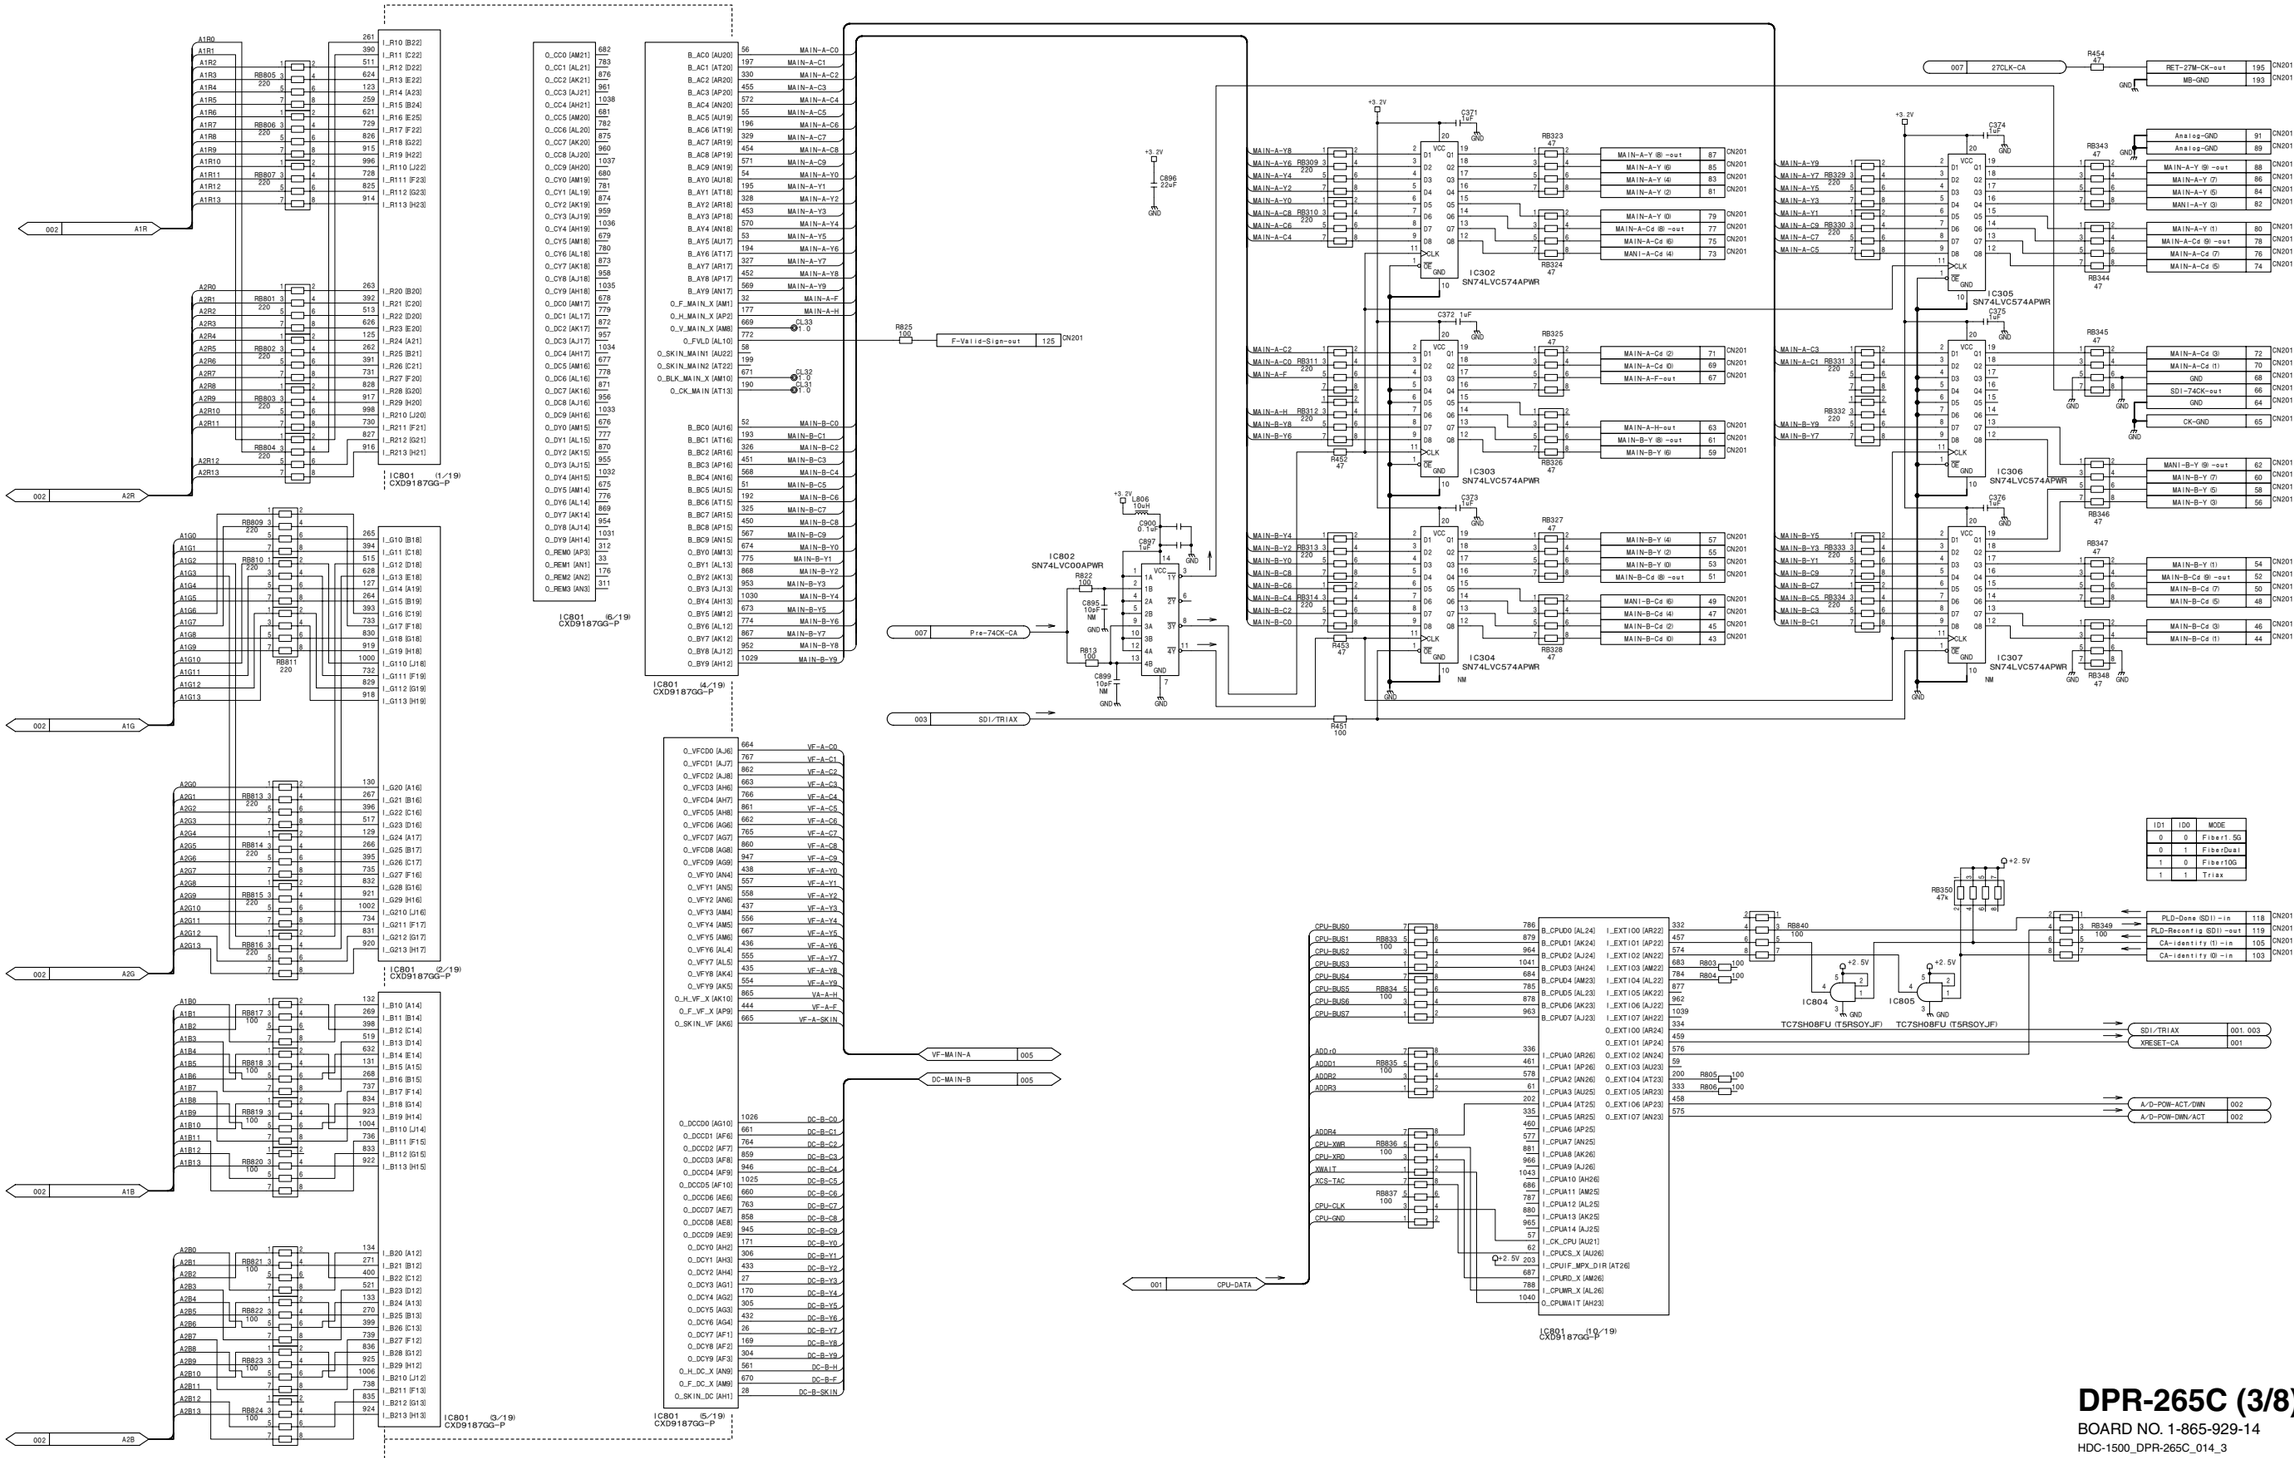
4-54




**DPR-265C (4/8)**
BOARD NO. 1-865-929-14
HDC-1500_DPR-265C_014_4

DPR-265C (5/8)
SUFFIX: -14

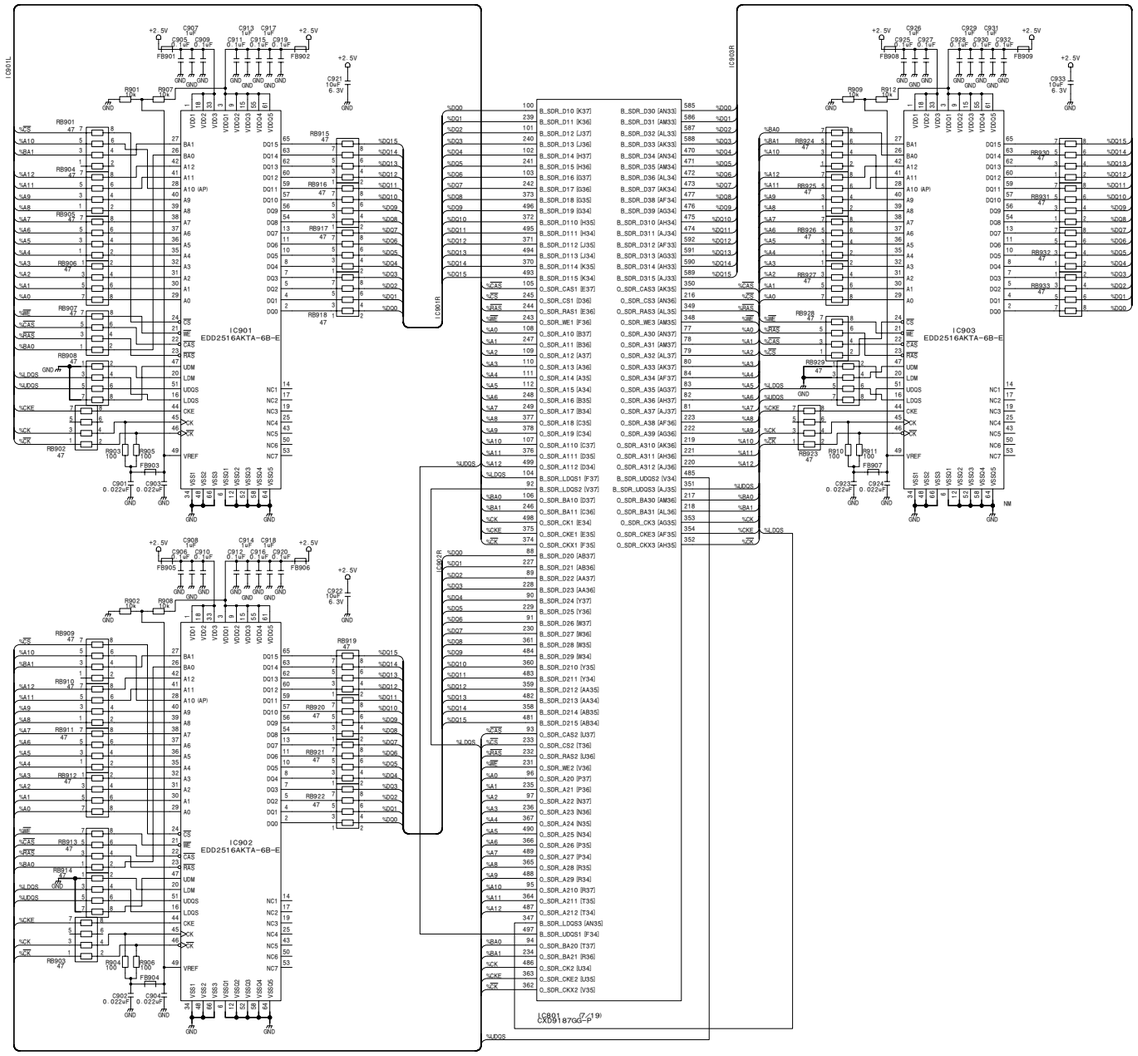


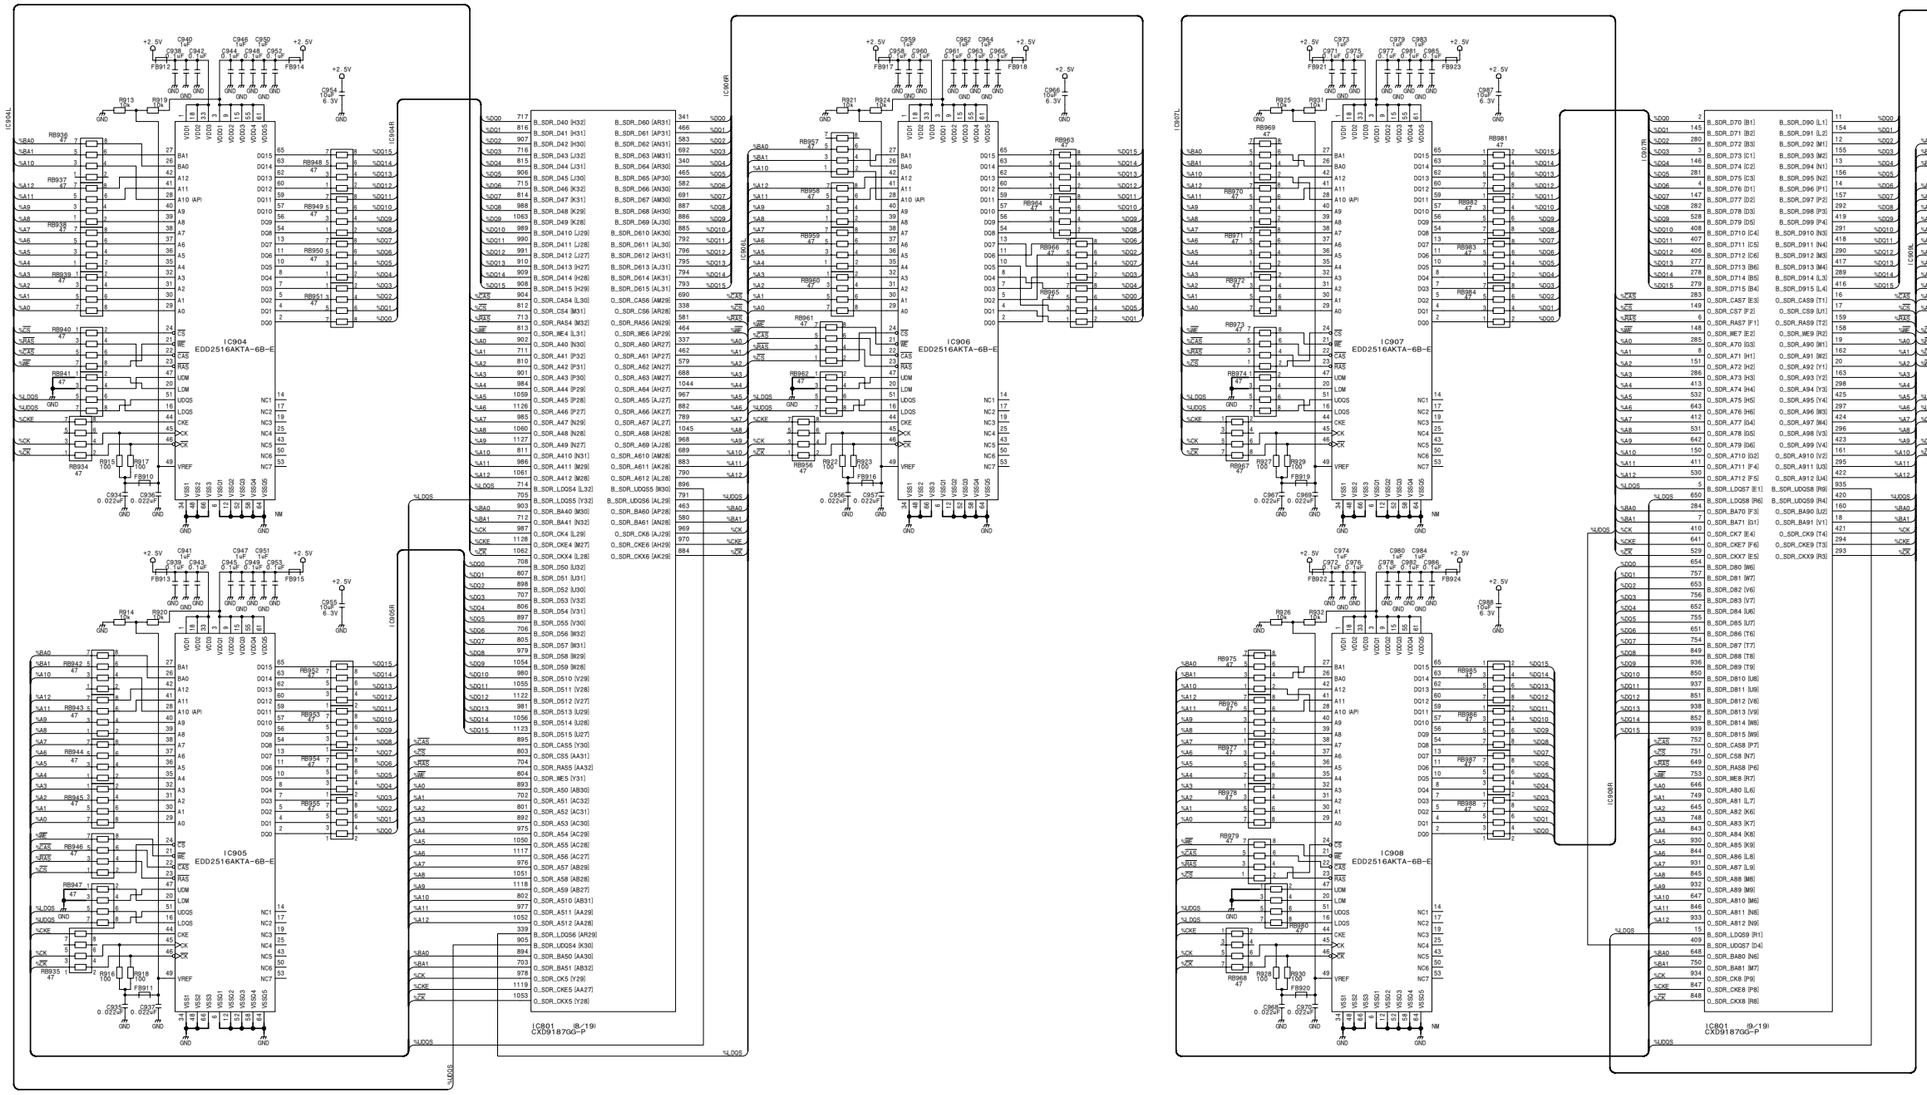



4-56

DPR-265C (5/8)
SUFFIX: -14




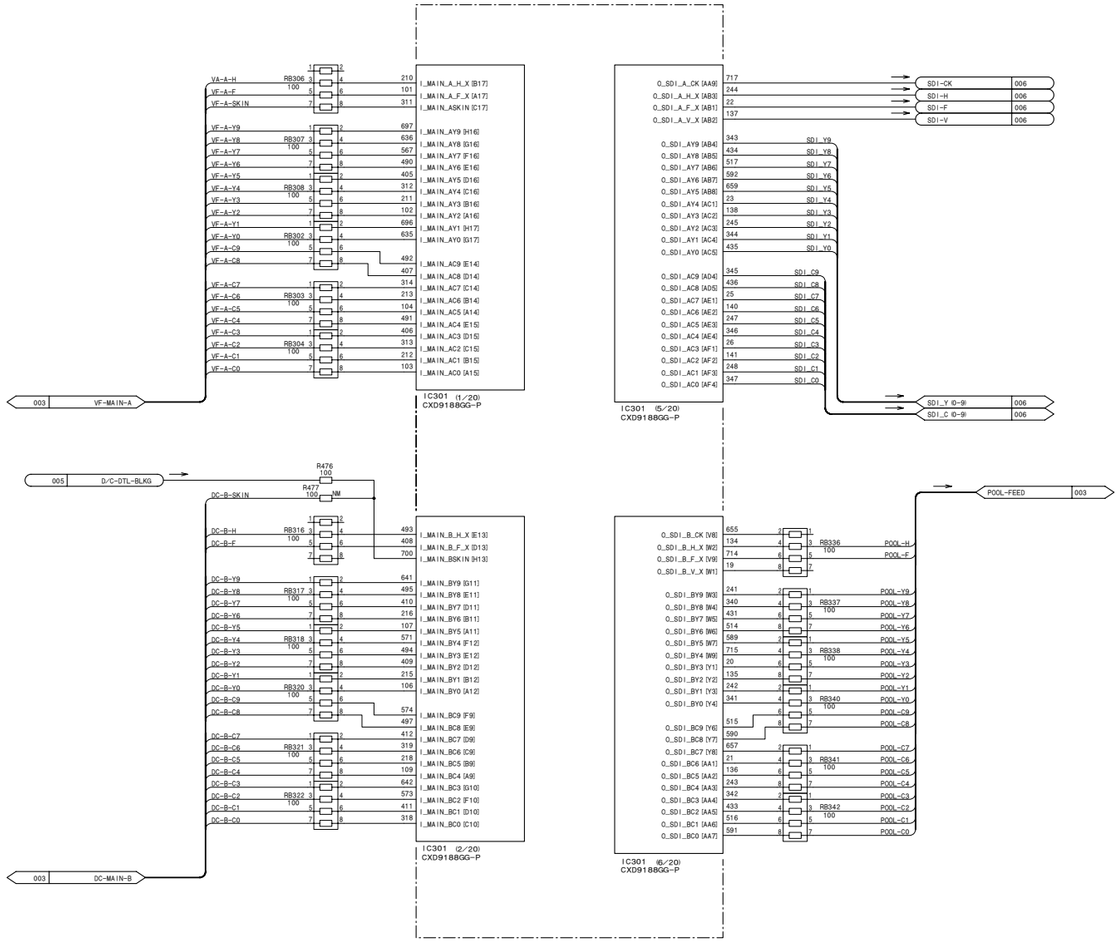

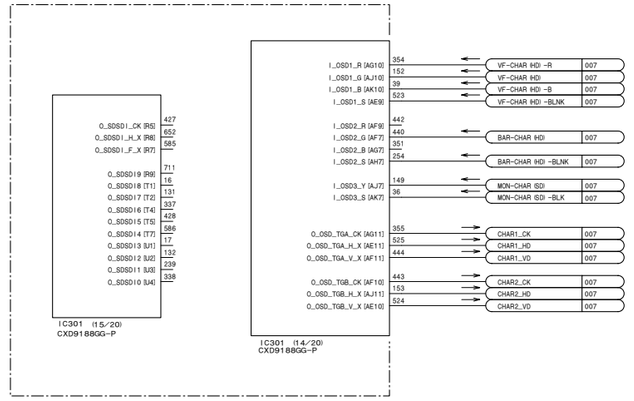DPR-265C (5/8)
BOARD NO. 1-865-929-14
HDC-1500_DPR-265C_014_5

DPR-265C (6/8)
SUFFIX: -14




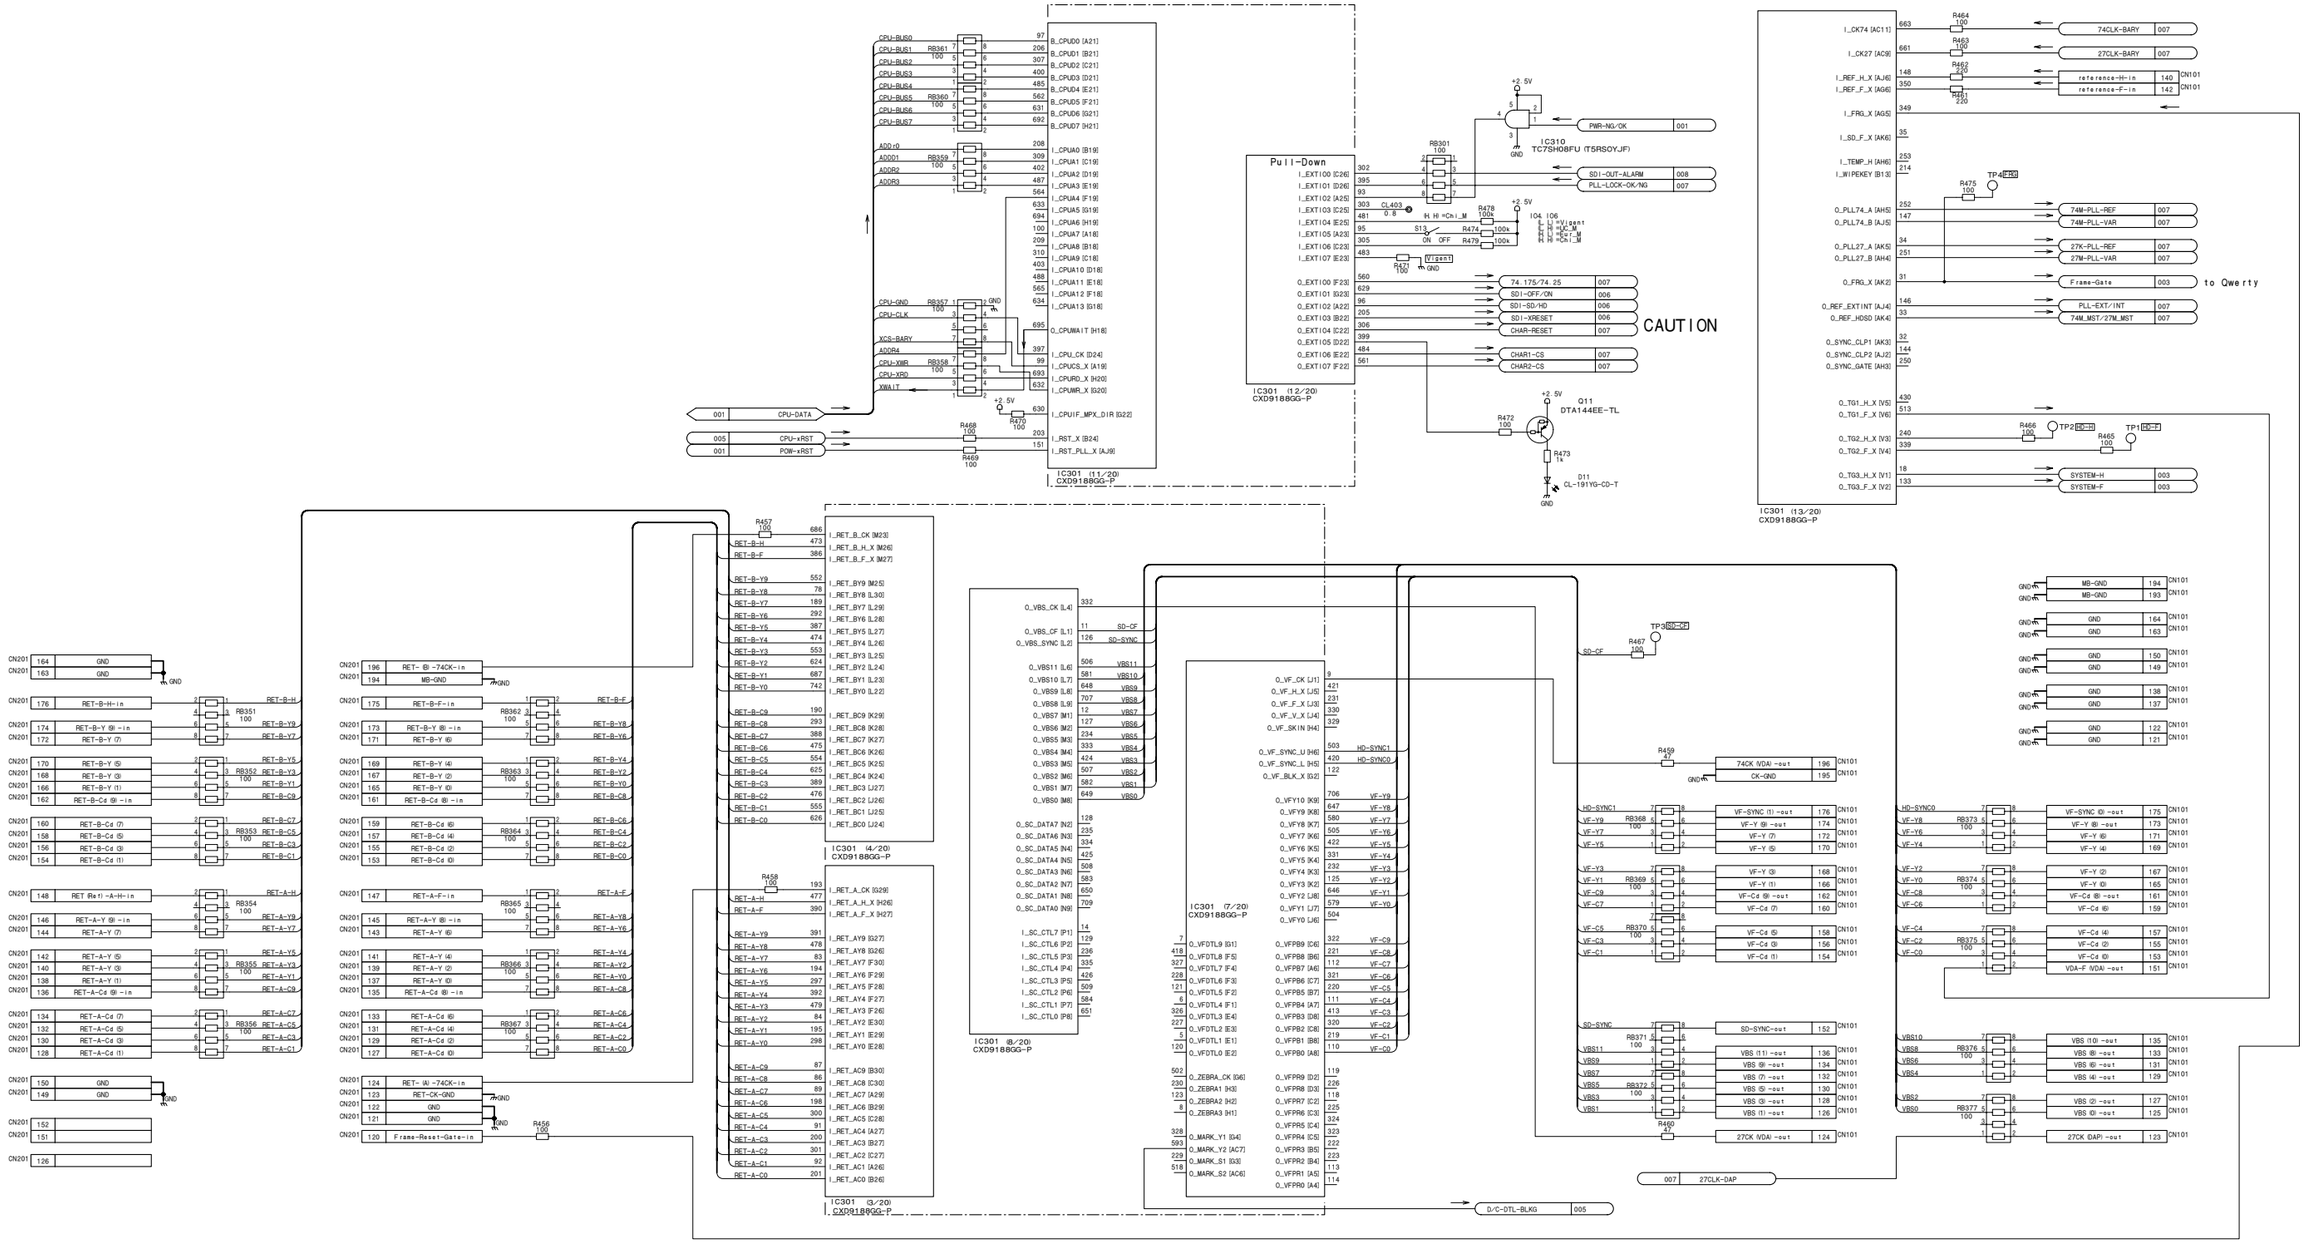











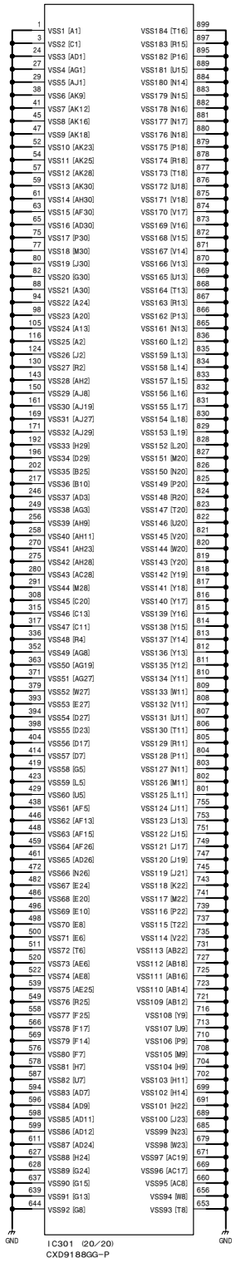


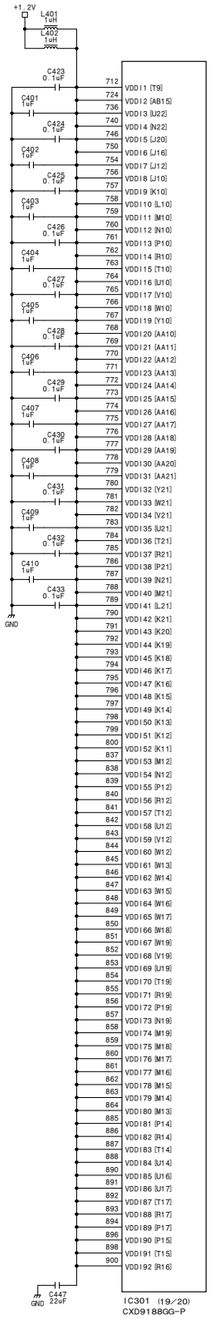


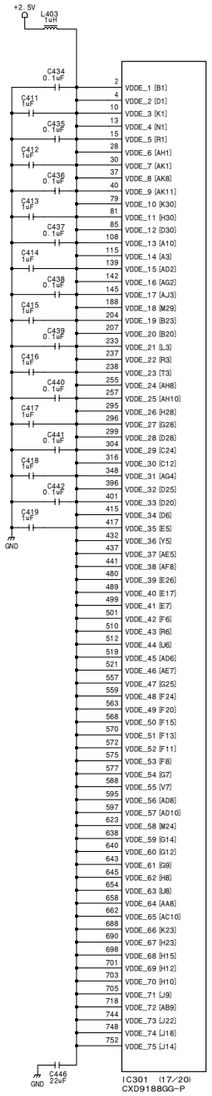DPR-265C (6/8)
BOARD NO. 1-865-929-14
HDC-1500_DPR-265C_014_6
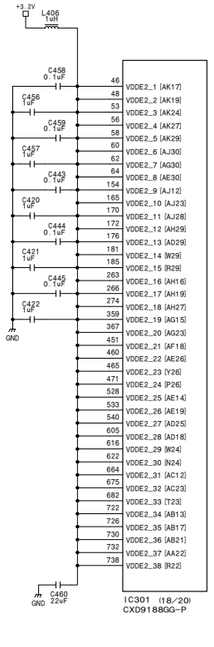
# DPR-265C (7/8)
**SUFFIX: -14**

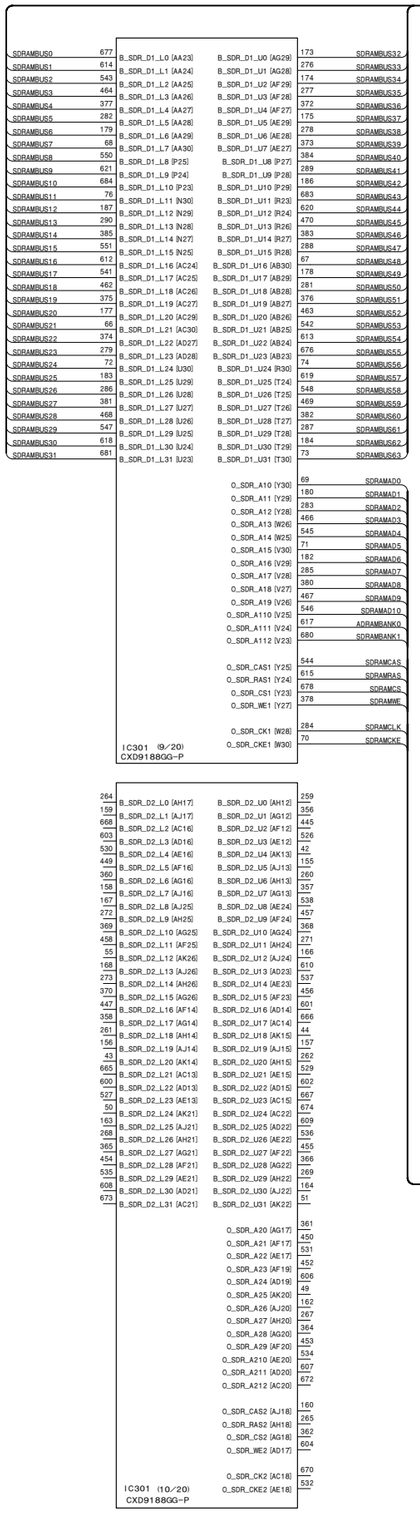DPR-265C (7/8)
SUFFIX: -14

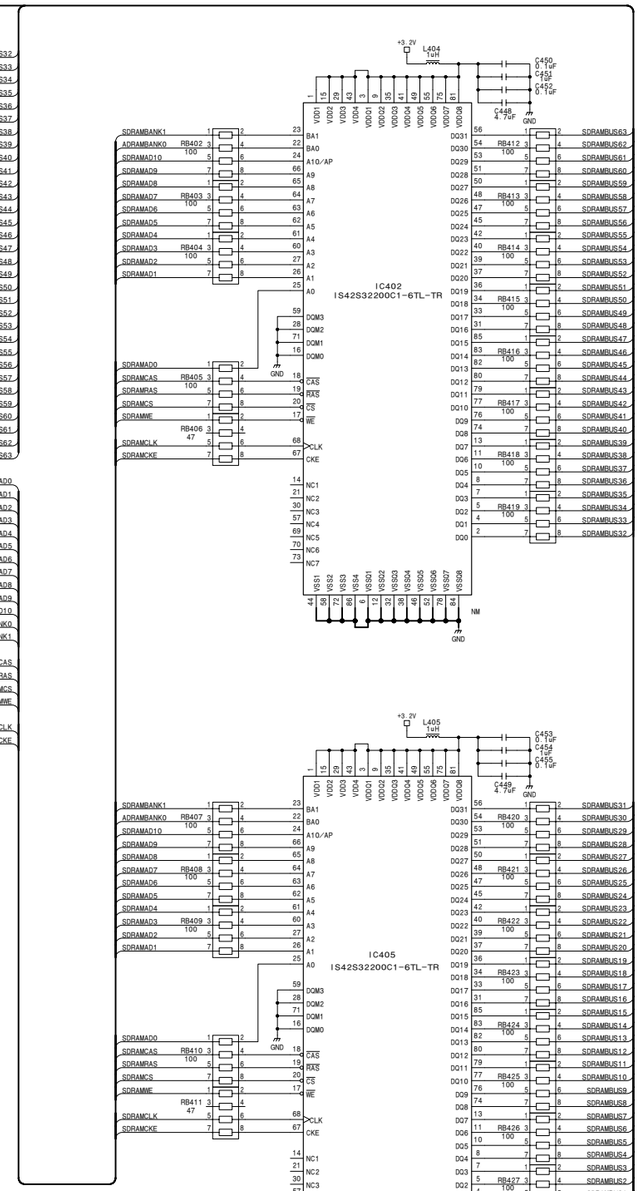

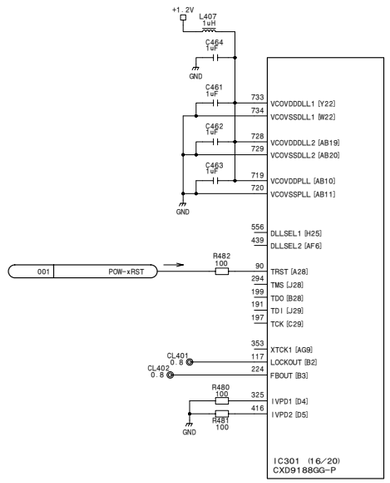
# DPR-265C (7/8)
BOARD NO. 1-865-929-14
HDC-1500_DPR-265C_014_7

**DPR-265C (8/8)**
**SUFFIX: -14**




**DPR-265C (8/8)**
BOARD NO. 1-865-929-14
HDC-1500_DPR-265C_014_8

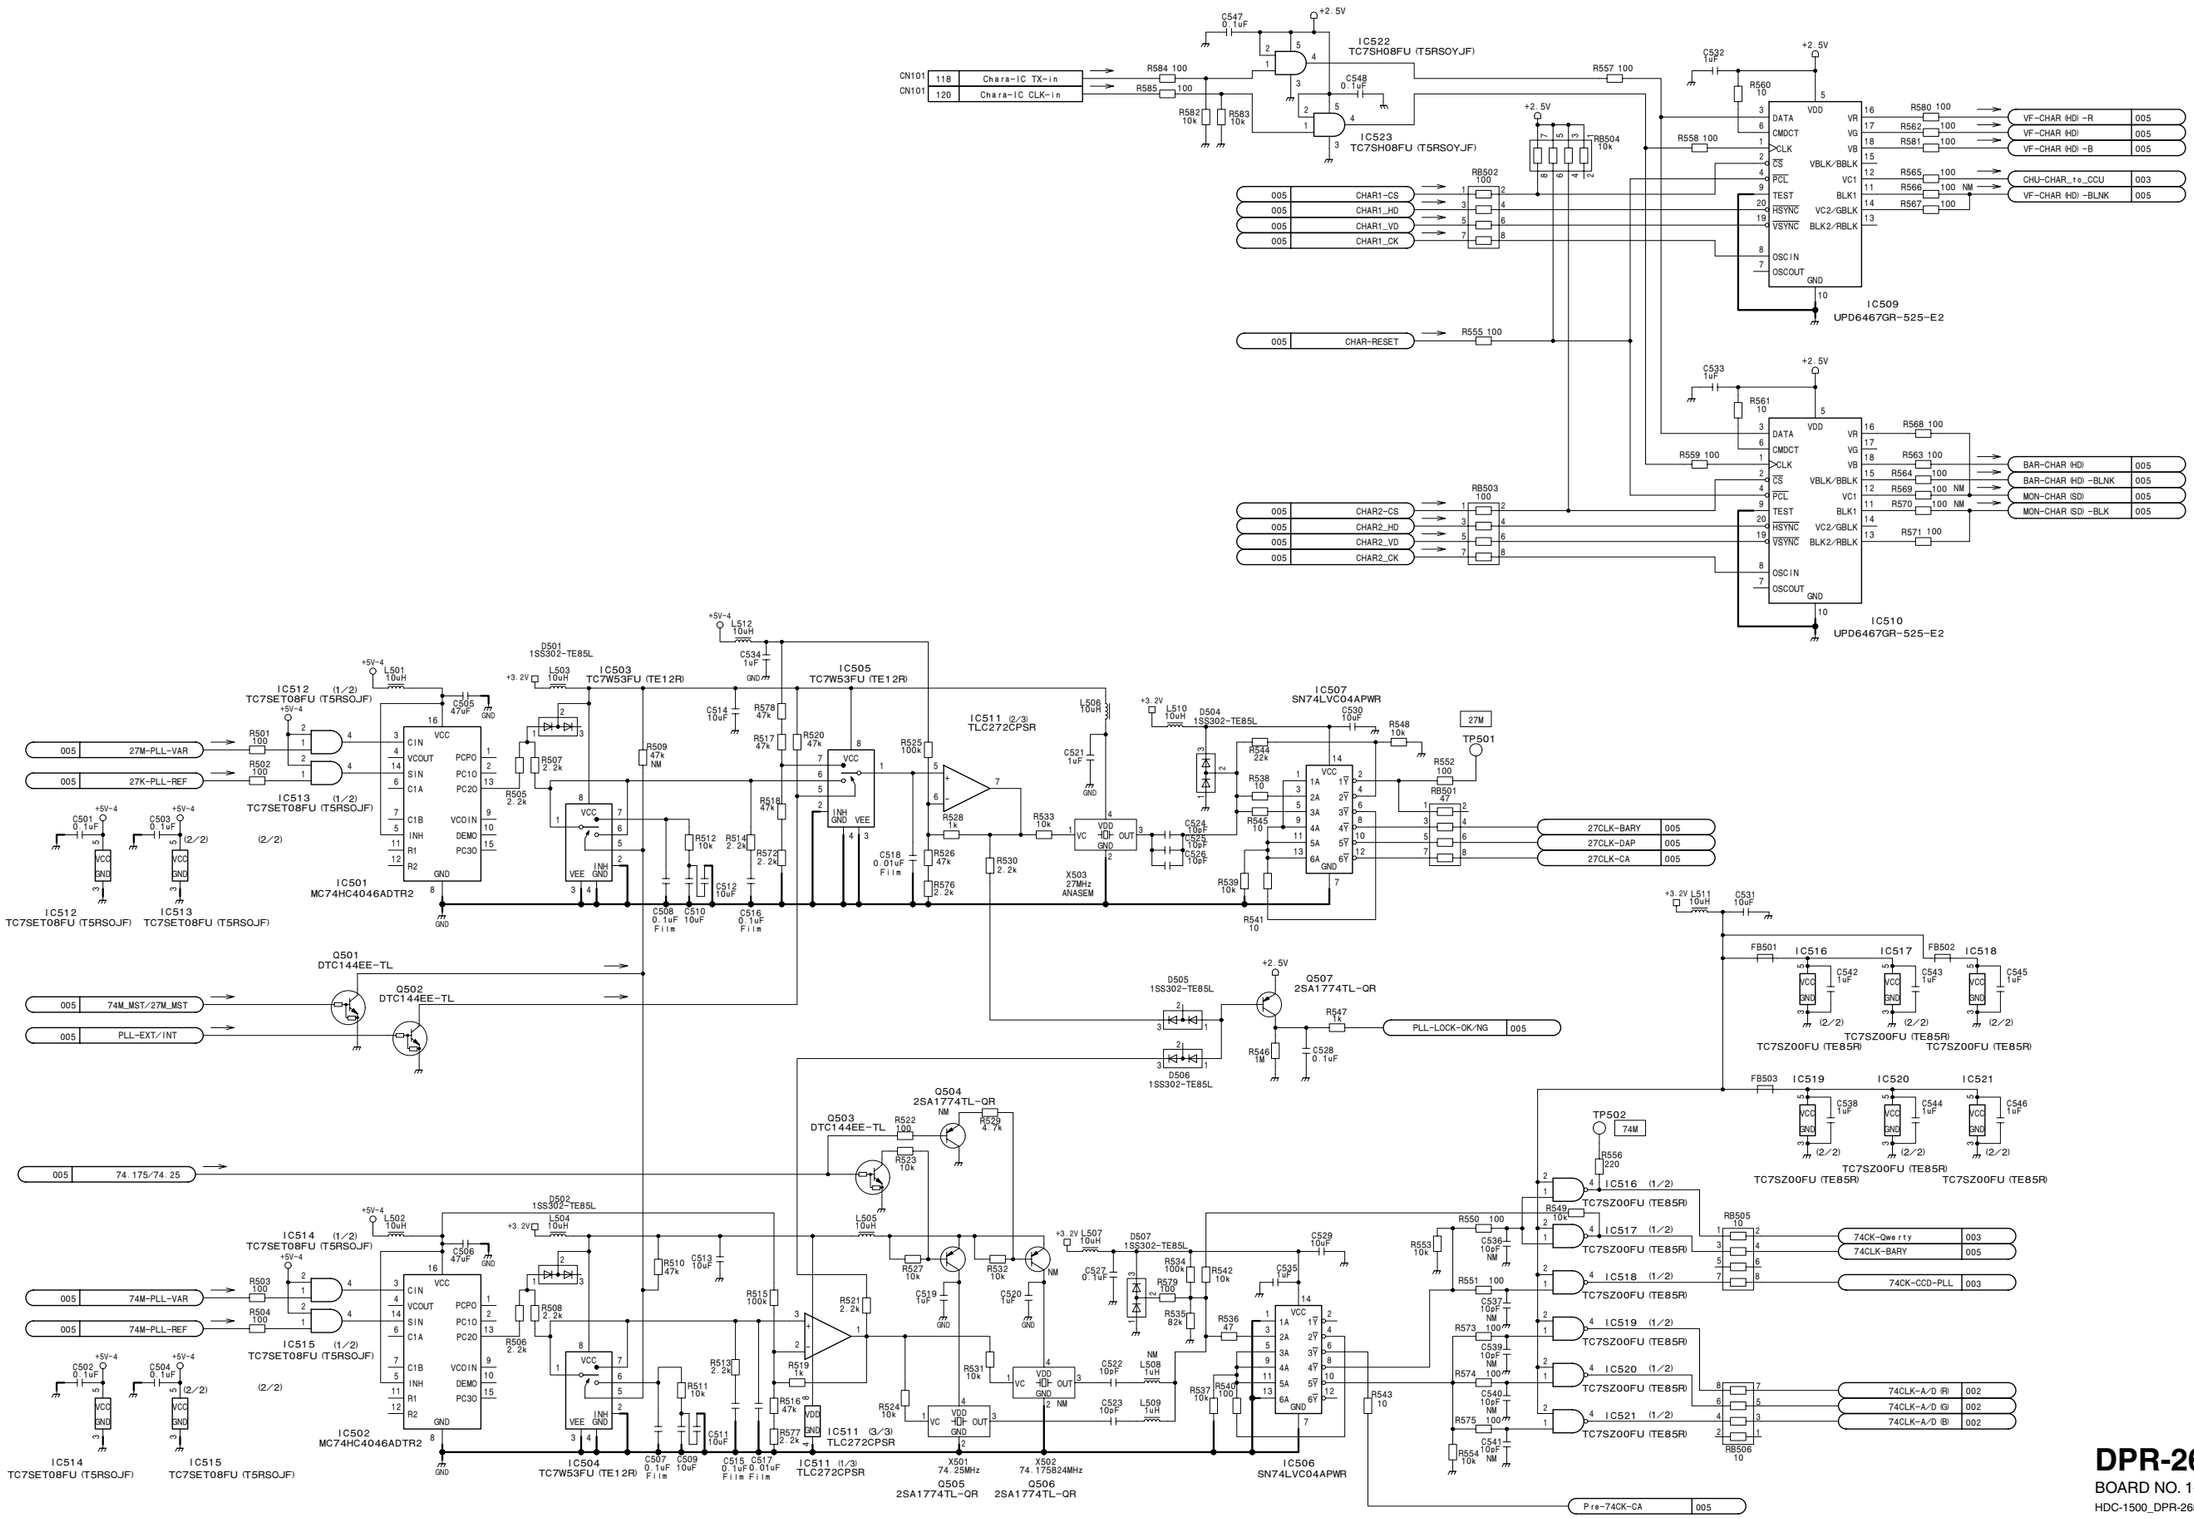
CN1
CN2
CN3
To TG-243
To CN-2579
To Filter
IC1 ADR381ART-REEL7
IC2 SN74LV541APWR
IC3 SN74LVC541APWR
IC4 SN74LVC541APWR
IC10 NJM062V (TE2)
IC11 NJM062V (TE2)
IC14 NJM062V (TE2)
Q1 2SC4176T1B33B34B35
Q2 2SC4176T1B33B34B35
Q3 2SA1610-T1Y34
Q4 2SA1213Y-TE12L
Q5 2SC4176T1B33B34B35
Q6 2SC4176T1B33B34B35
Q7 2SC4176T1B33B34B35
Q8 2SA1610-T1Y34
Q9 2SA1213Y-TE12L
Q10 2SA1213Y-TE12L
Q11 FDC6561AN
Q12 FDC6506P
Q13 FDC6506P
Q14 FDC6506P
Q15 FDC6506P
Q16 FDC6561AN
Q17 FDC6561AN
Q18 FDC6561AN
Q19 2SC4176T1B33B34B35
Q20 2SA1213Y-TE12L
Q21 2SA1610-T1Y34
Q22 2SC2873Y-TE12L
D1 MA6S121- (TX)
D2 MA6S121- (TX)
D3 EC10QS-D6-TE12L
D4 MA6S121- (TX)
D5 MA6S121- (TX)
+15.5V
-7V
+3.7V
+6V (AFE)
+24V
+16V
-5.5V
-8.5V
+1.8V
+4V
-3.5V
+3.3V
+4.5V
*NOTE
REF. NO. | SUFFIX -14, 21 | SUFFIX -22
R25, R26 | 4.7Ω 1/16W | 10Ω 1/10W
R87, R88 | NM | 10Ω 1/10W




**DR-528**
BOARD NO. 1-865-973-14, 21, 22
HDC-1500_DR-528_014_1

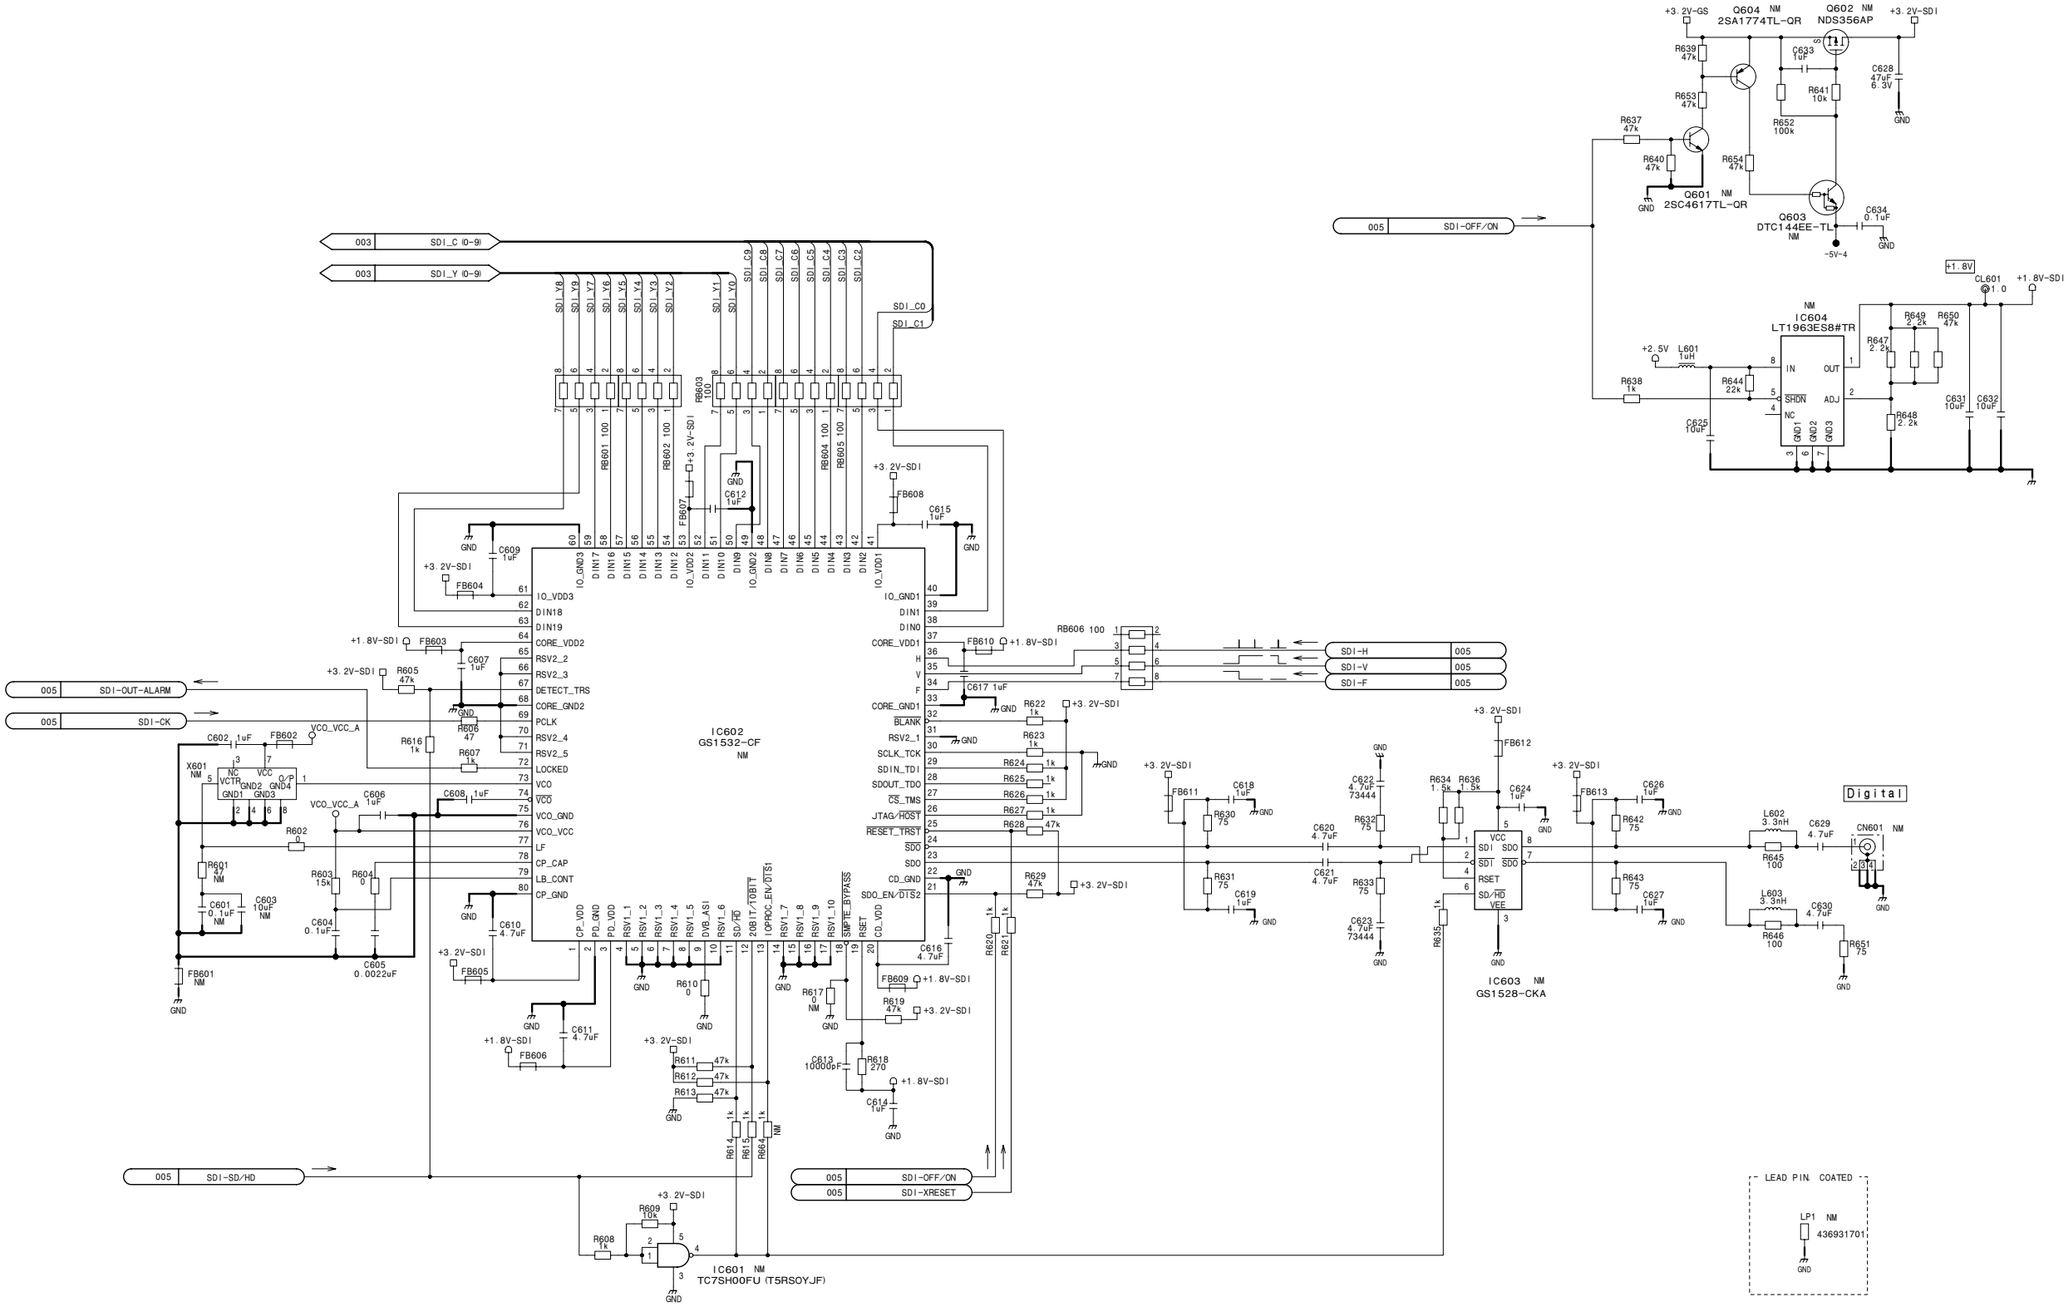
CN1
CN2
CN3
To TG-247
To CN-2723
To Filter
IC1 SN74LVC541APWR
IC2 SN74LVC541APWR
IC4 SN74LVC541APWR
IC5 SN74LVC541APWR
IC6 SN74LVC541APWR
IC7 SN74LVC541APWR
IC3 ADR381ART-REEL7
IC17 NJM062V (TE2)
IC13 NJM062V (TE2)
IC14 UPC814G2-E2
Q1 2SC4176T1B33B34B35
Q2 2SC4176T1B33B34B35
Q5 2SC4176T1B33B34B35
Q6 2SC4176T1B33B34B35
Q3 2SA1610-T1Y34
Q7 2SA1610-T1Y34
Q8 FDC6561AN
Q9 FDC6506P
Q4 2SA1213Y-TE12L
Q11 2SA1213Y-TE12L
Q19 2SA1213Y-TE12L
Q28 2SA1213Y-TE12L
Q10 2SC4176T1B33B34B35
Q27 2SC4176T1B33B34B35
Q29 2SA1610-T1Y34
Q30 2SD2098-T100R
D6 EC10QS-06-TE12L
*NOTE
REF. NO. | SUFFIX -11, 21 | SUFFIX -22
R87, R88 | NM | 10Ω 1/10W
R16, R19 | 4.7Ω 1/16W | 10Ω 1/10W
*NOTE
REF. NO. | SUFFIX 11 | SUFFIX 21-
R40 | 68 | 220
1W/6332
+15V
-7.5V
-5.5V
+3.2V
+24V

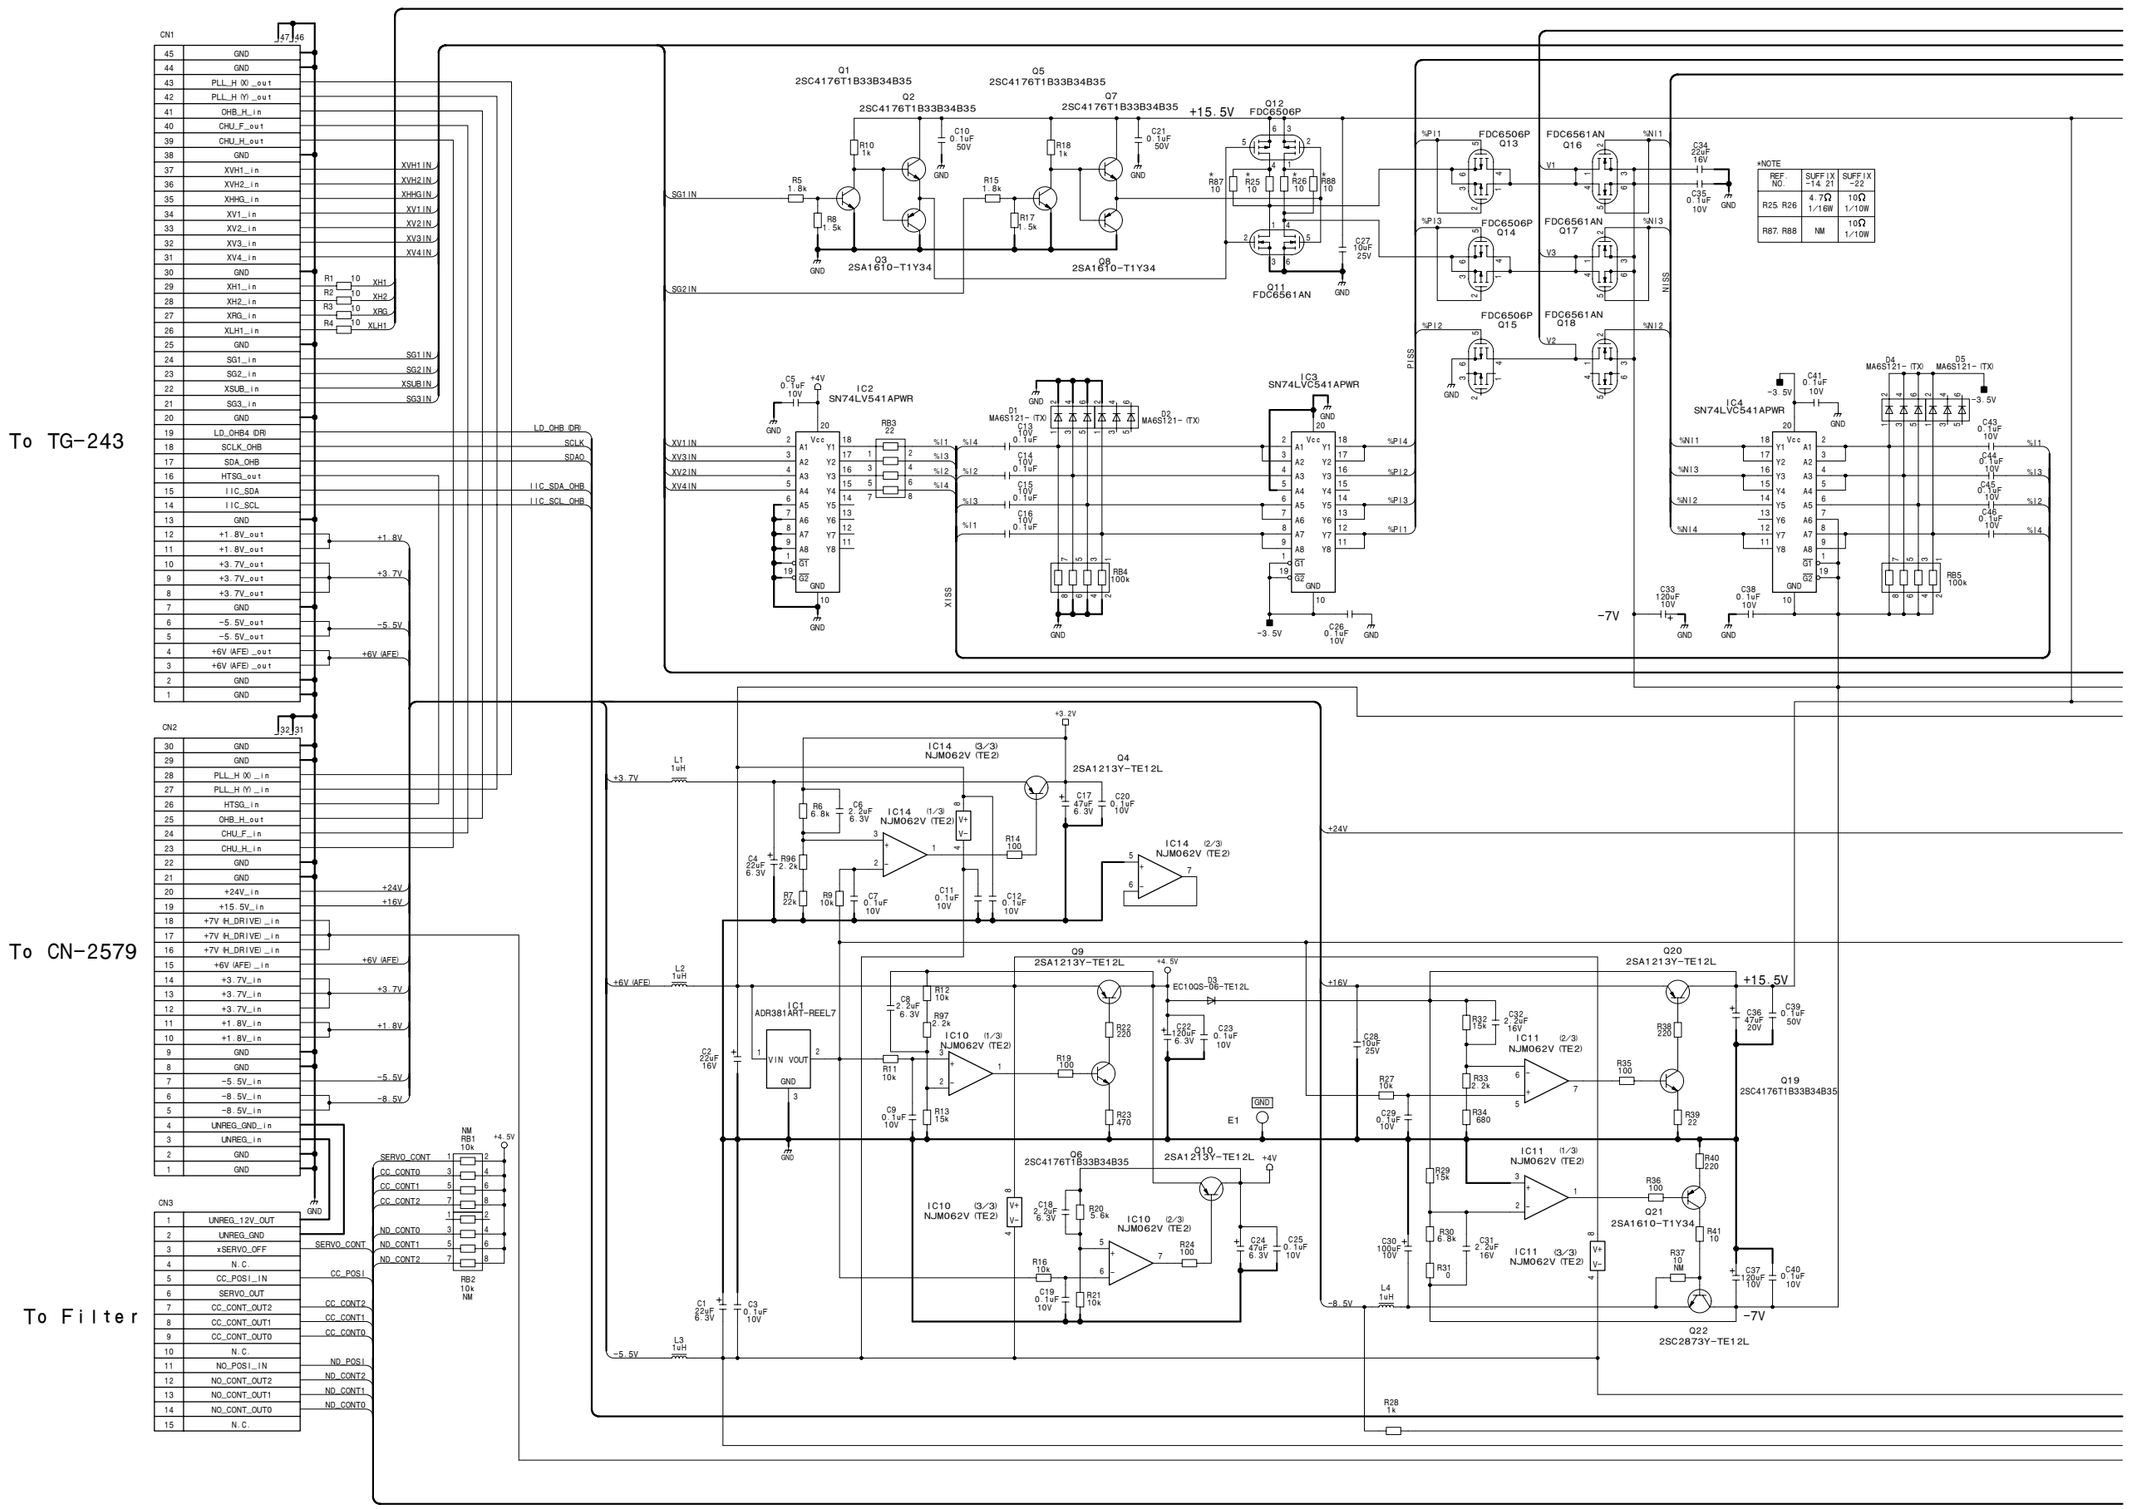


**DR-562**
BOARD NO. 1-865-961-11, 21, 22
HDC-1600_DR-562_011_1

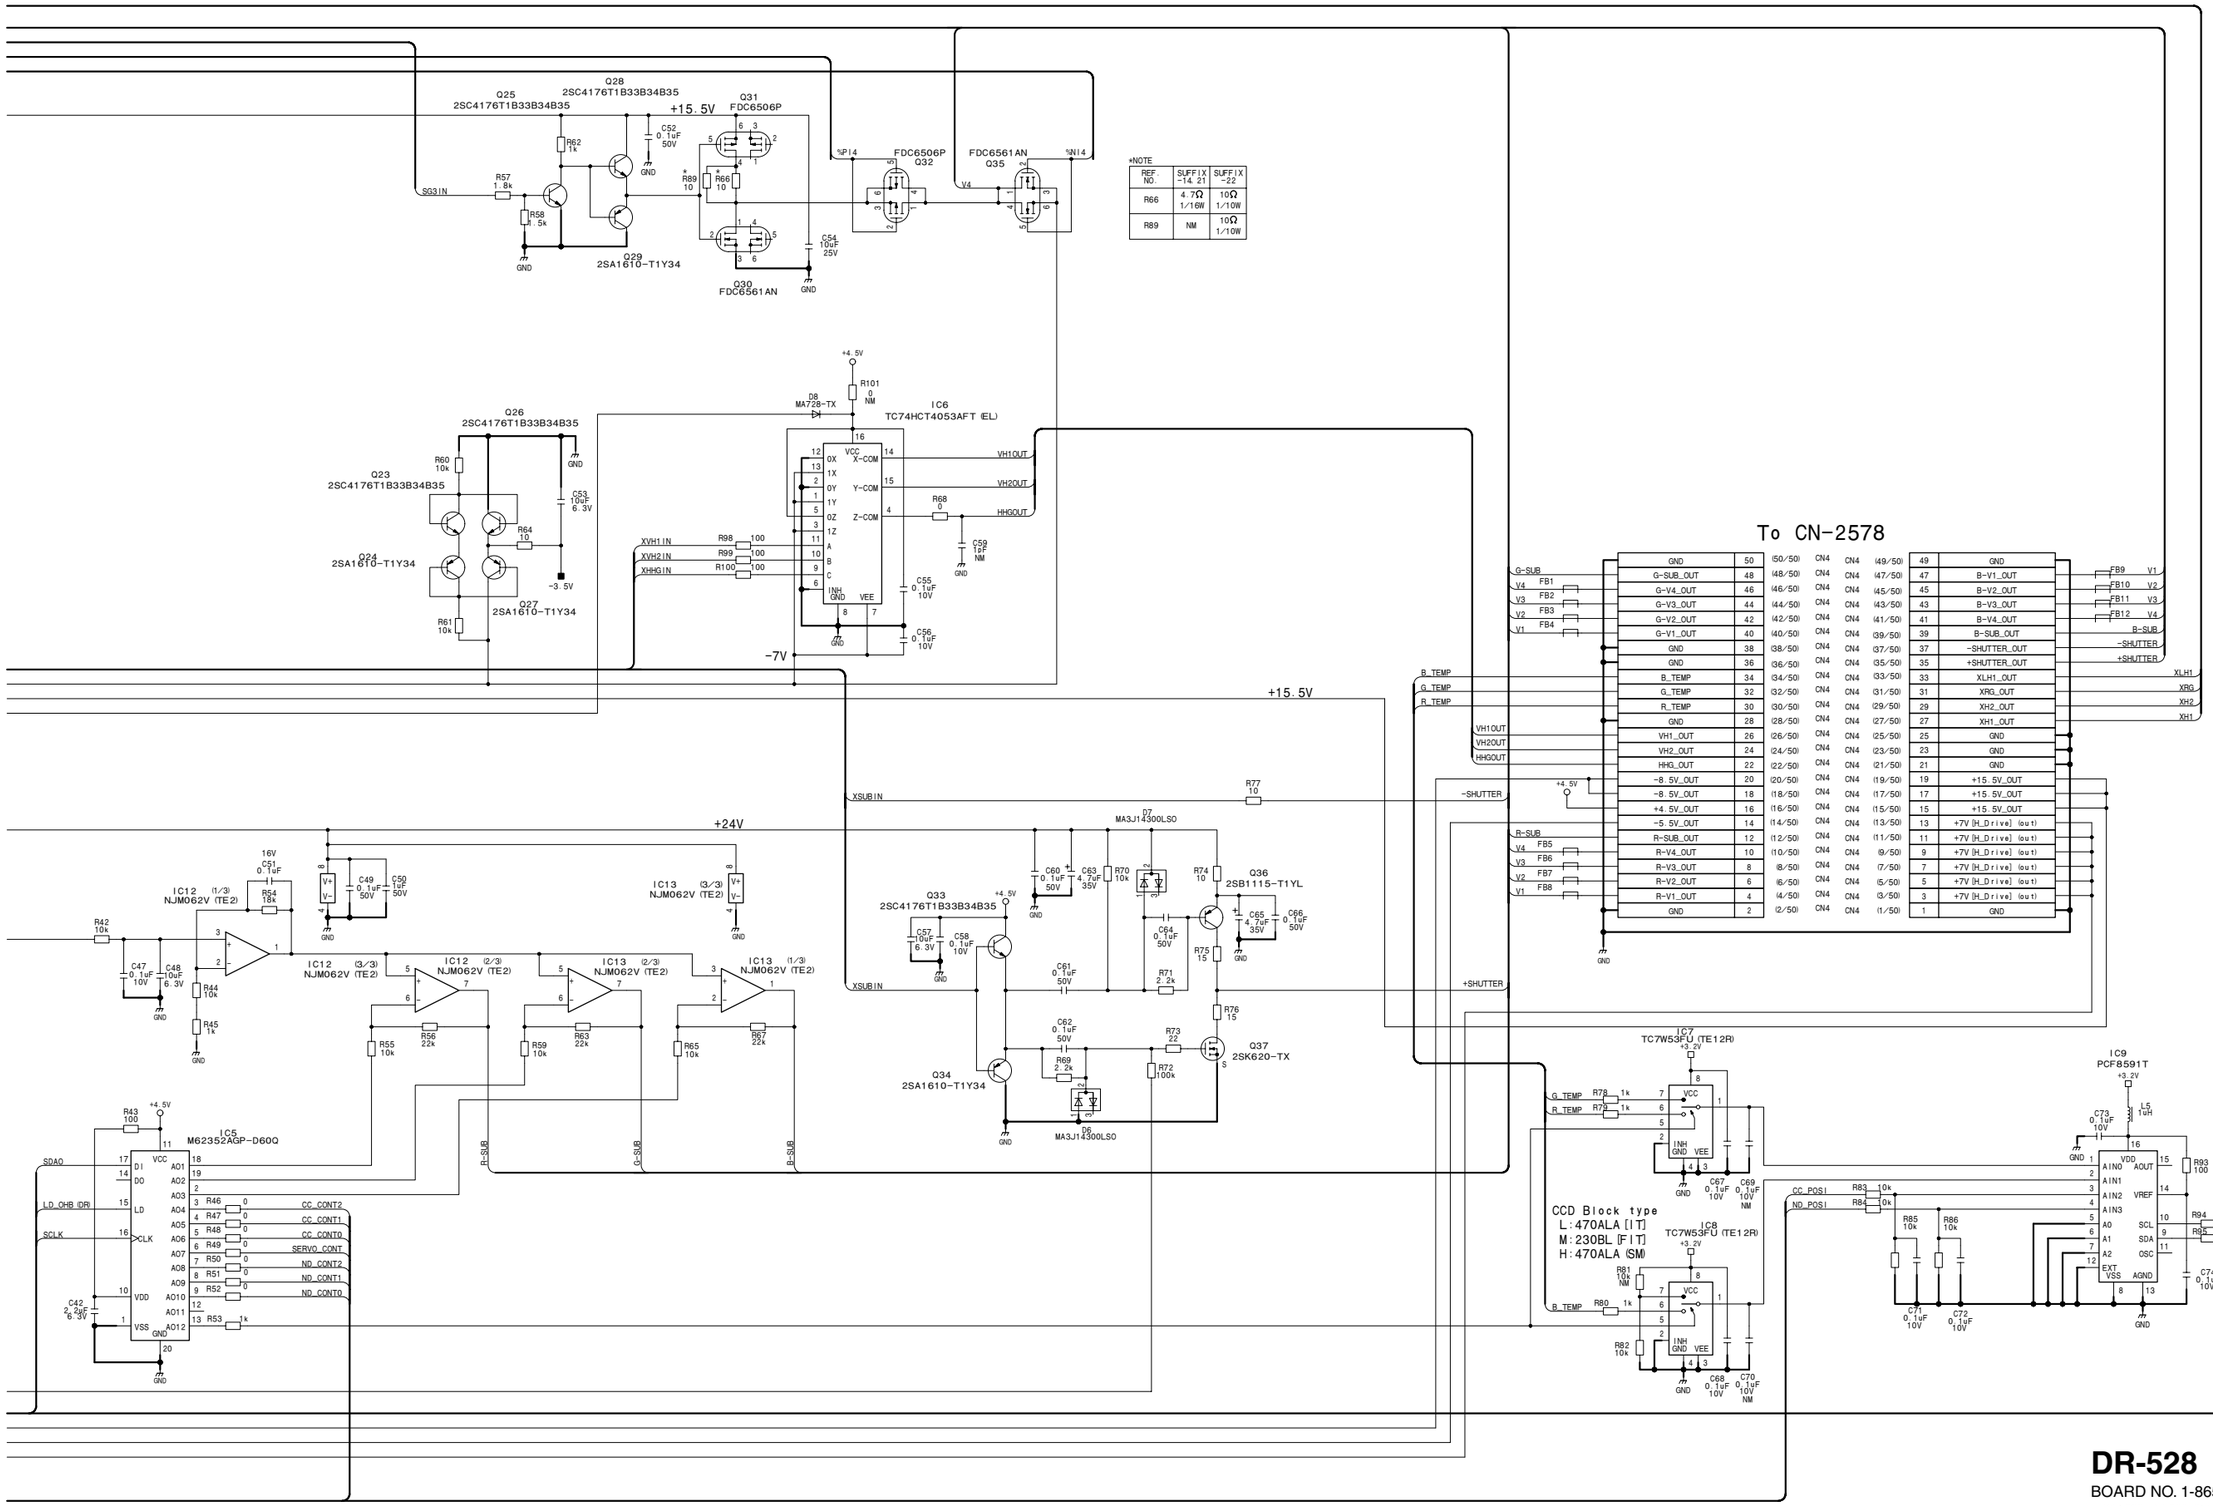FL-337, FL-338
SUFFIX: -11, 31 SUFFIX: -11, 31

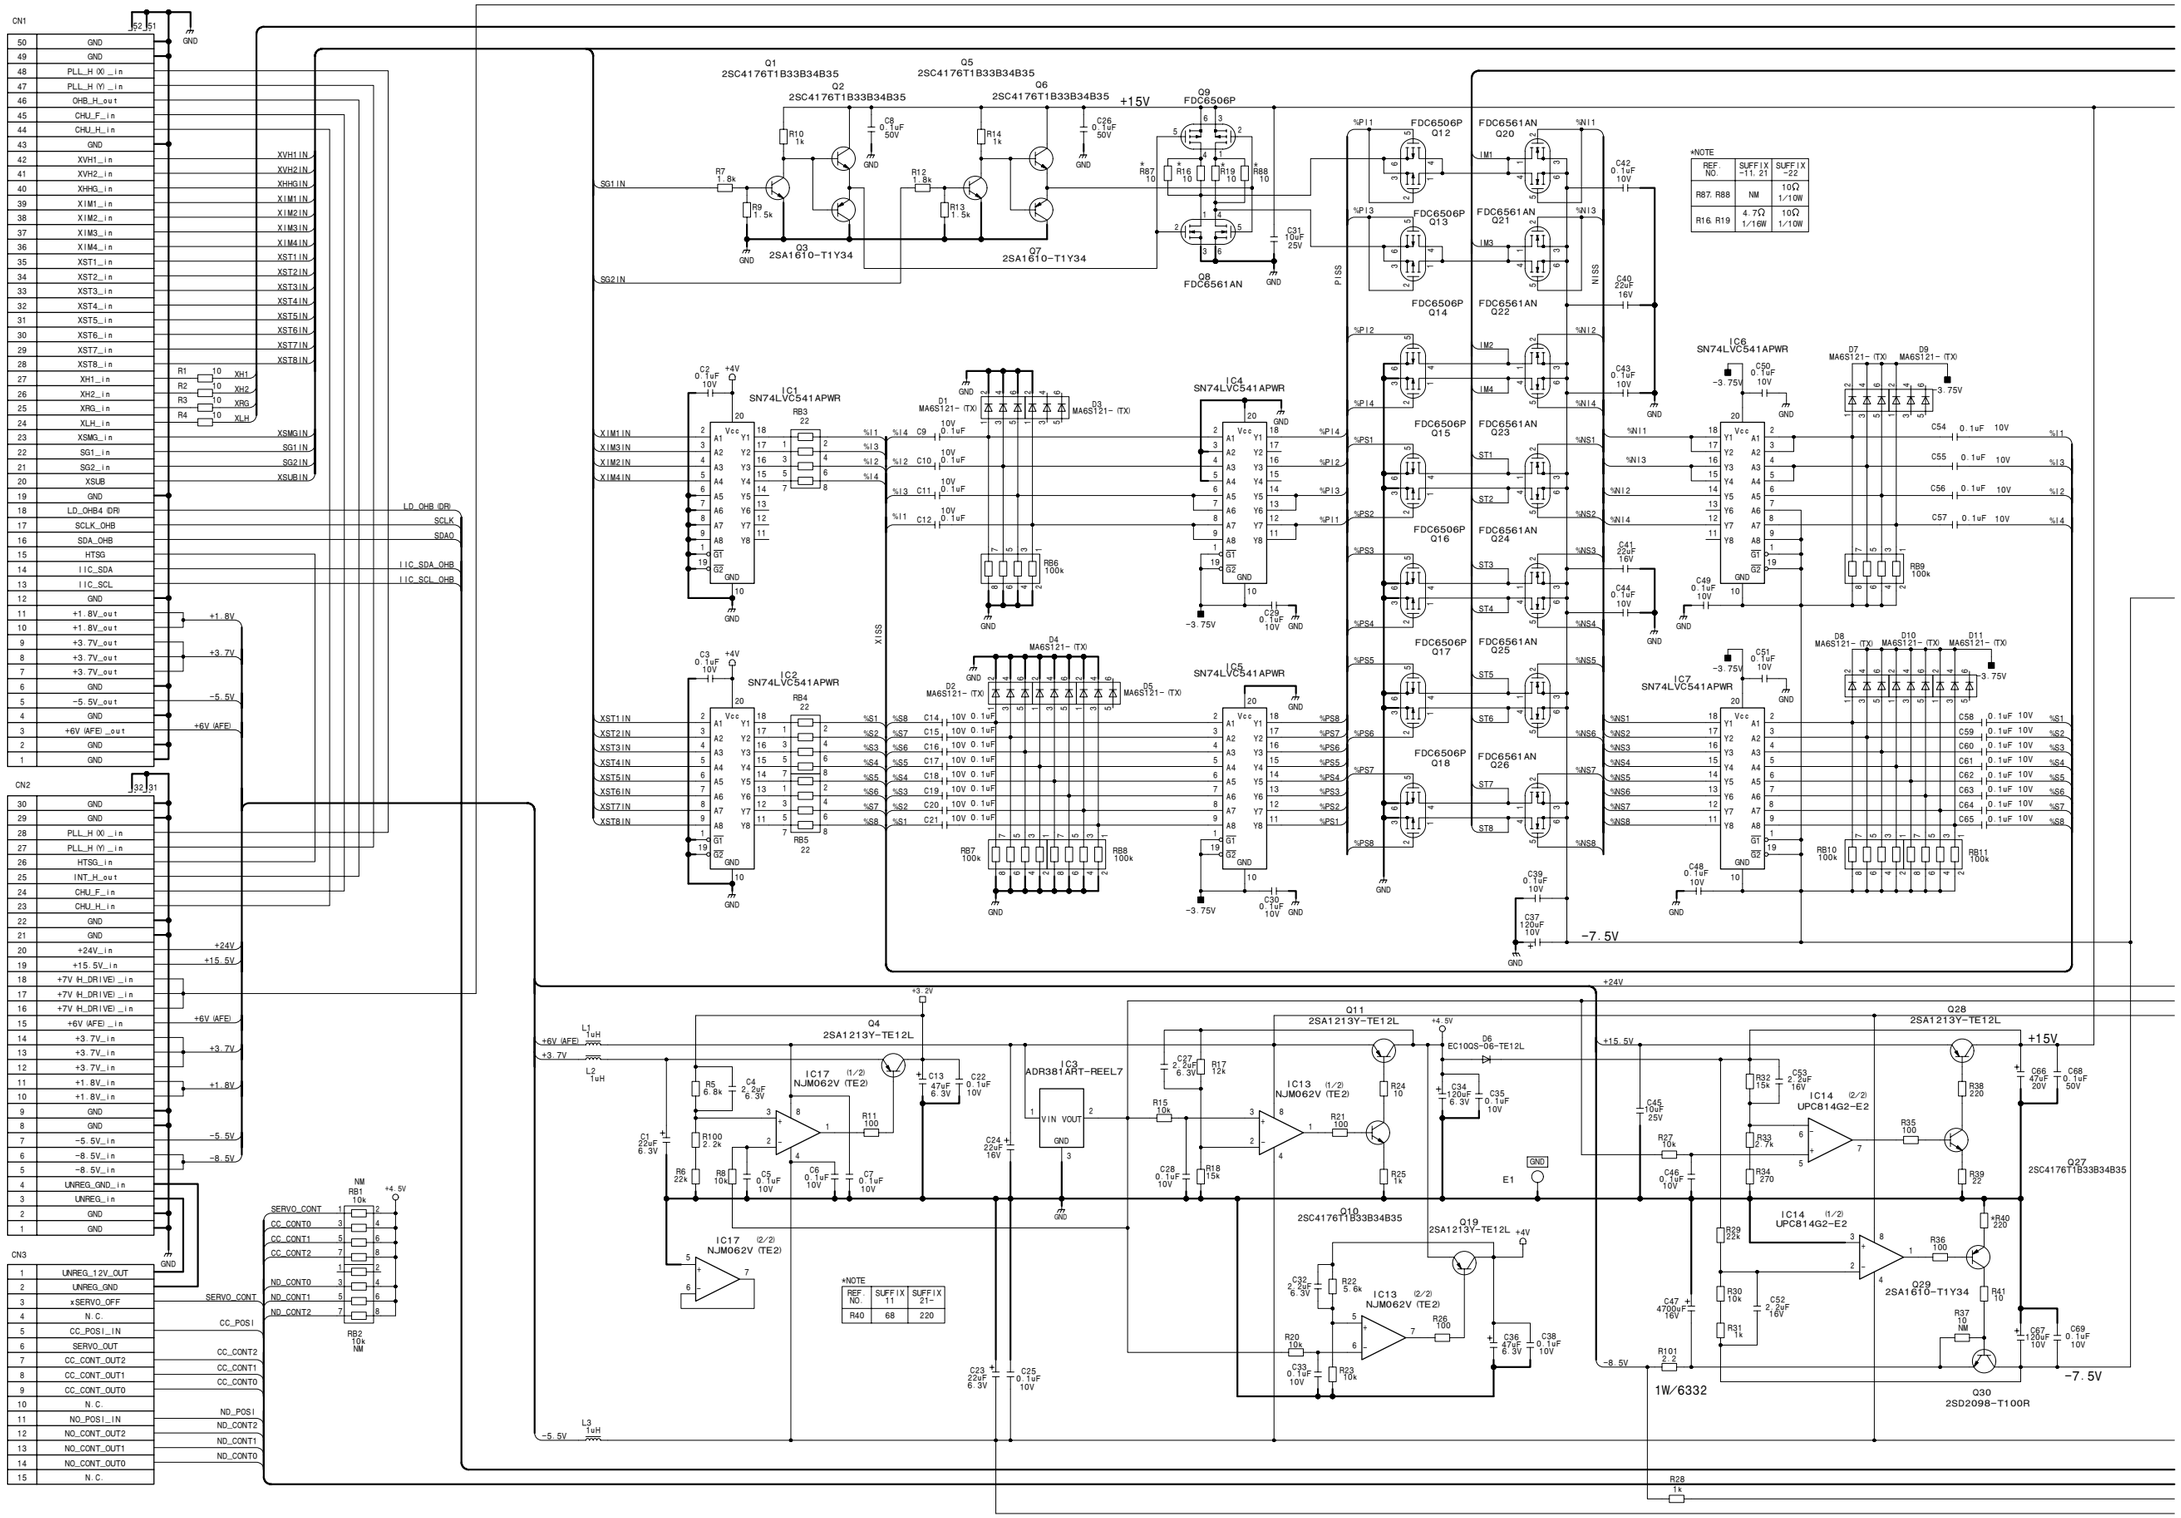


# FL-337

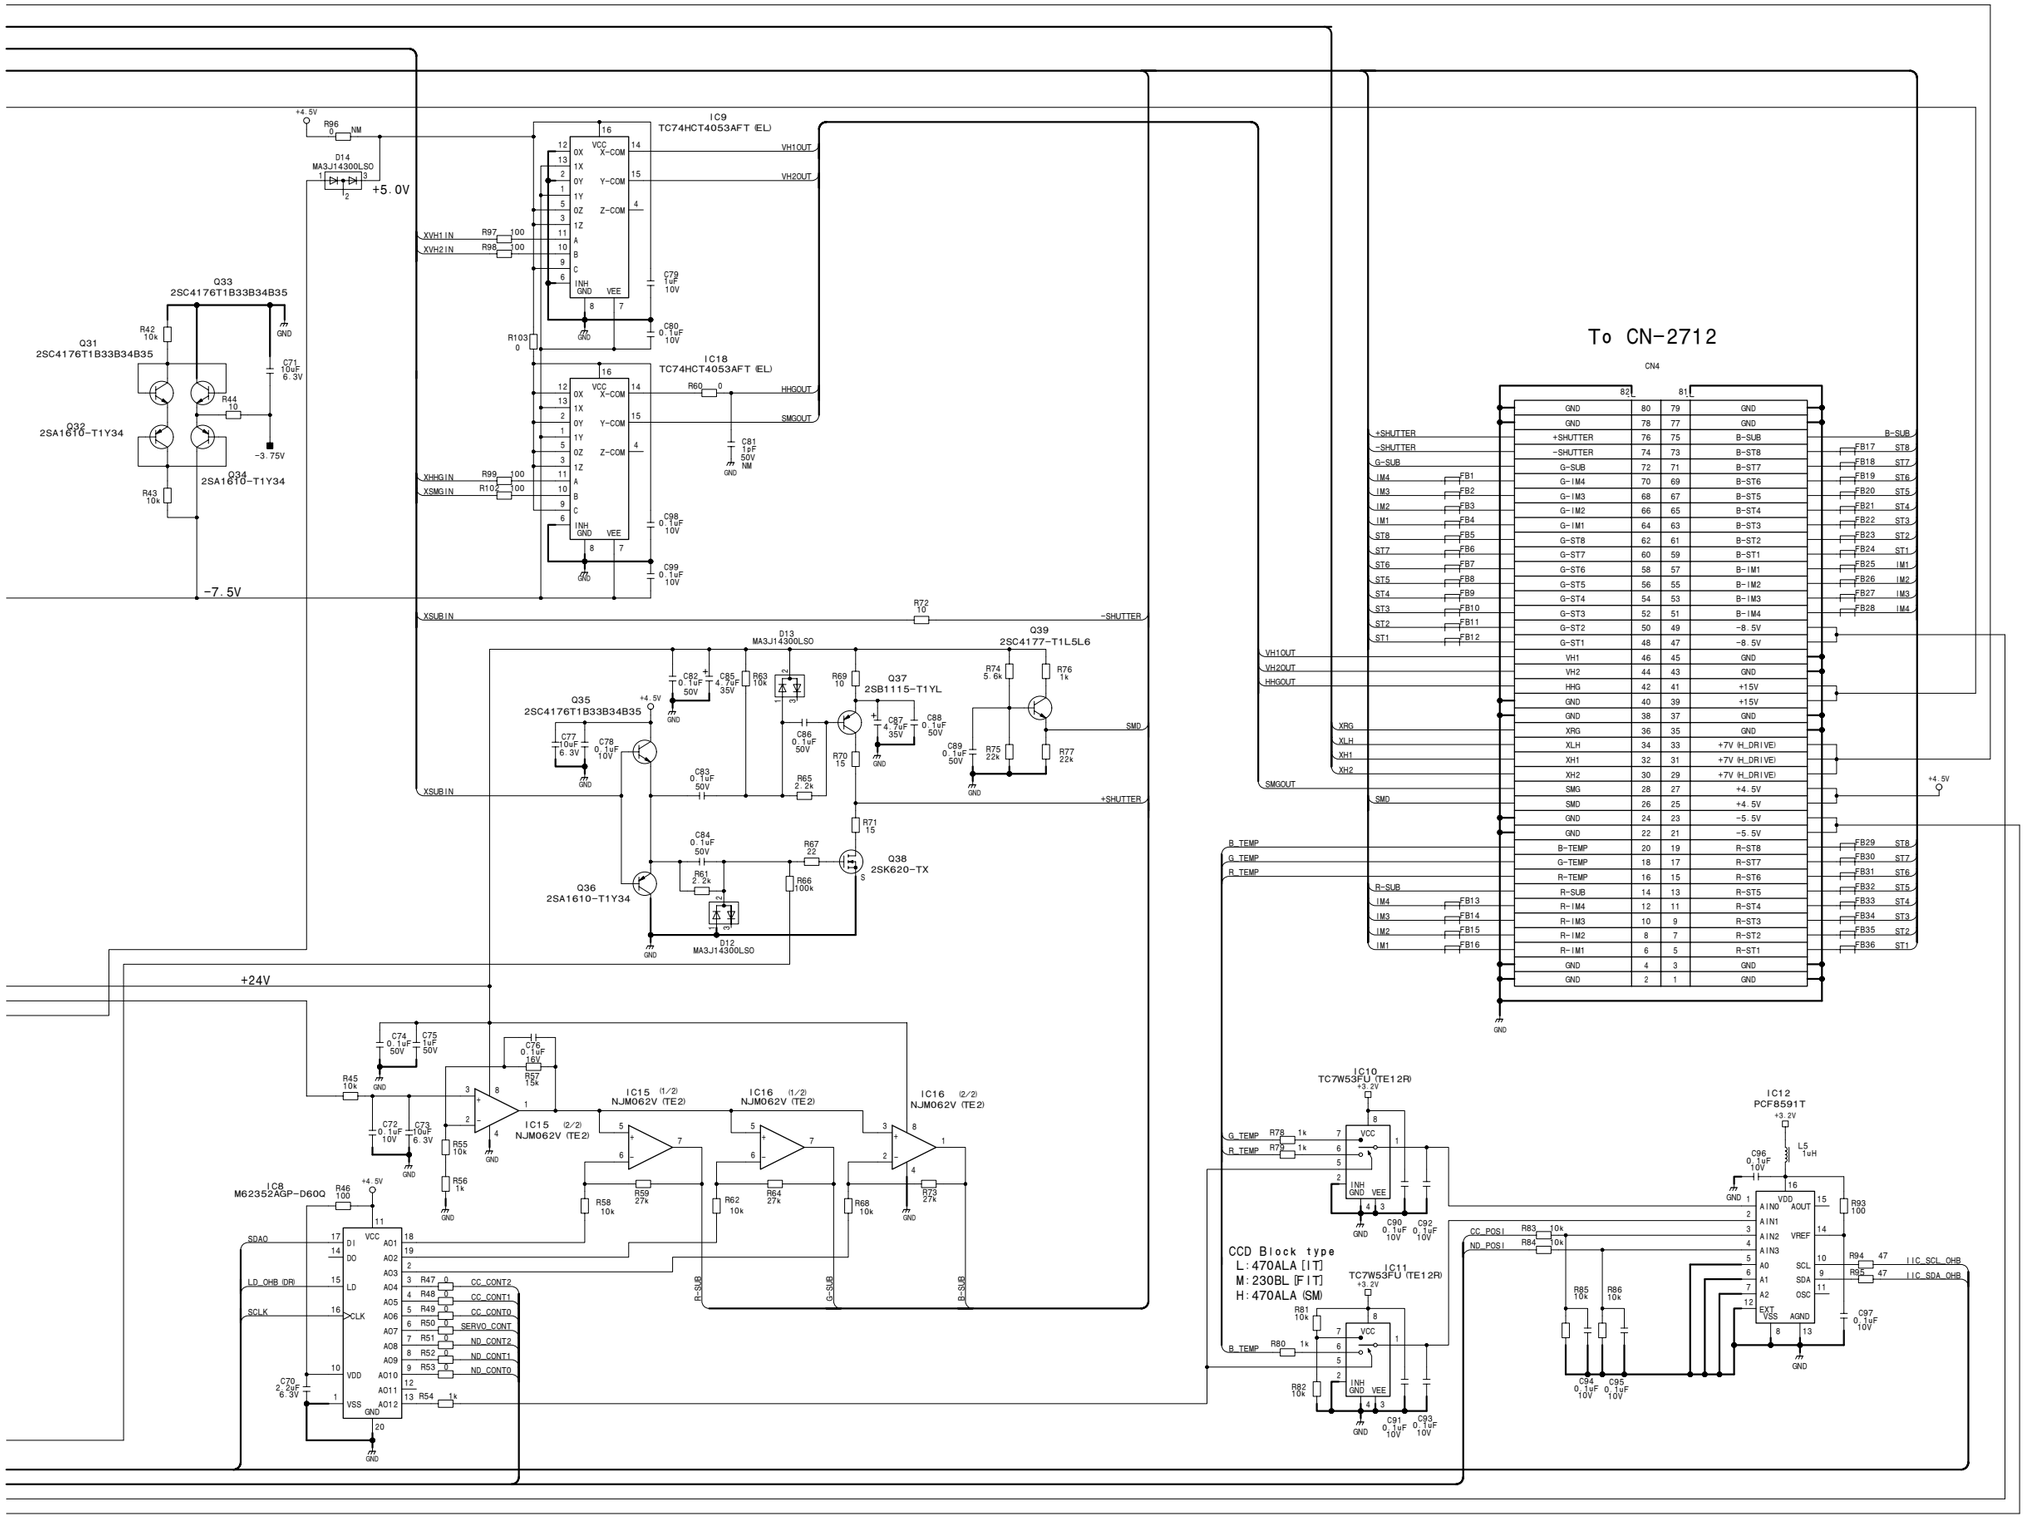BOARD NO. 1-868-411-11, 31

HDC1550_FL-337_011_1

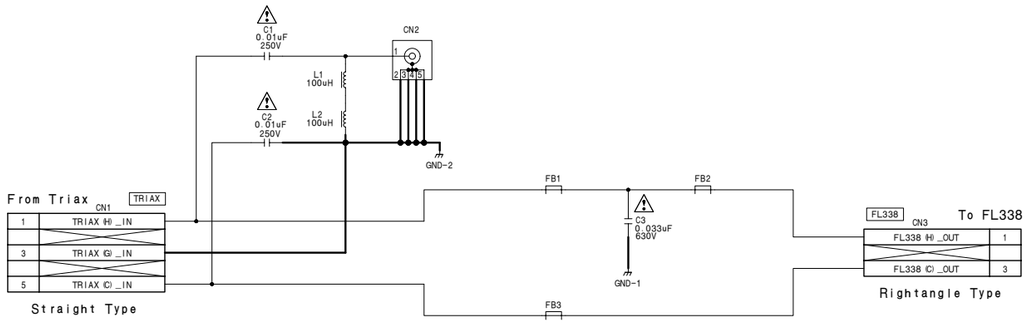


# FL-338

BOARD NO. 1-868-492-11, 31

HDC1550_FL-338_011_1

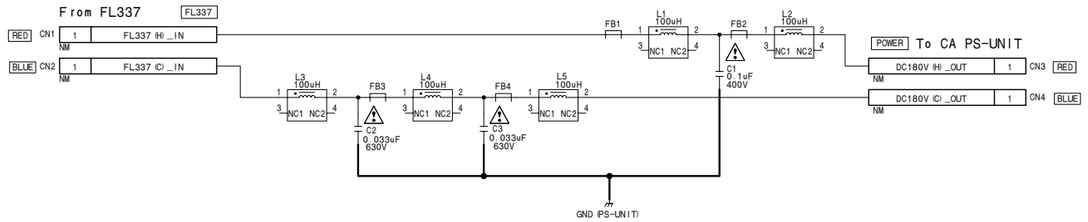


*NOTE

| REF NO. | SUFFIX-11, 31 | SUFFIX-12, 32 |
|---|---|---|
| C4 | 220uF 6.3V | 1000uF 6.3V |
| L2 | 100uH | NOT USED |
| R79 | NOT USED | 2.2 1W |




# LE-291

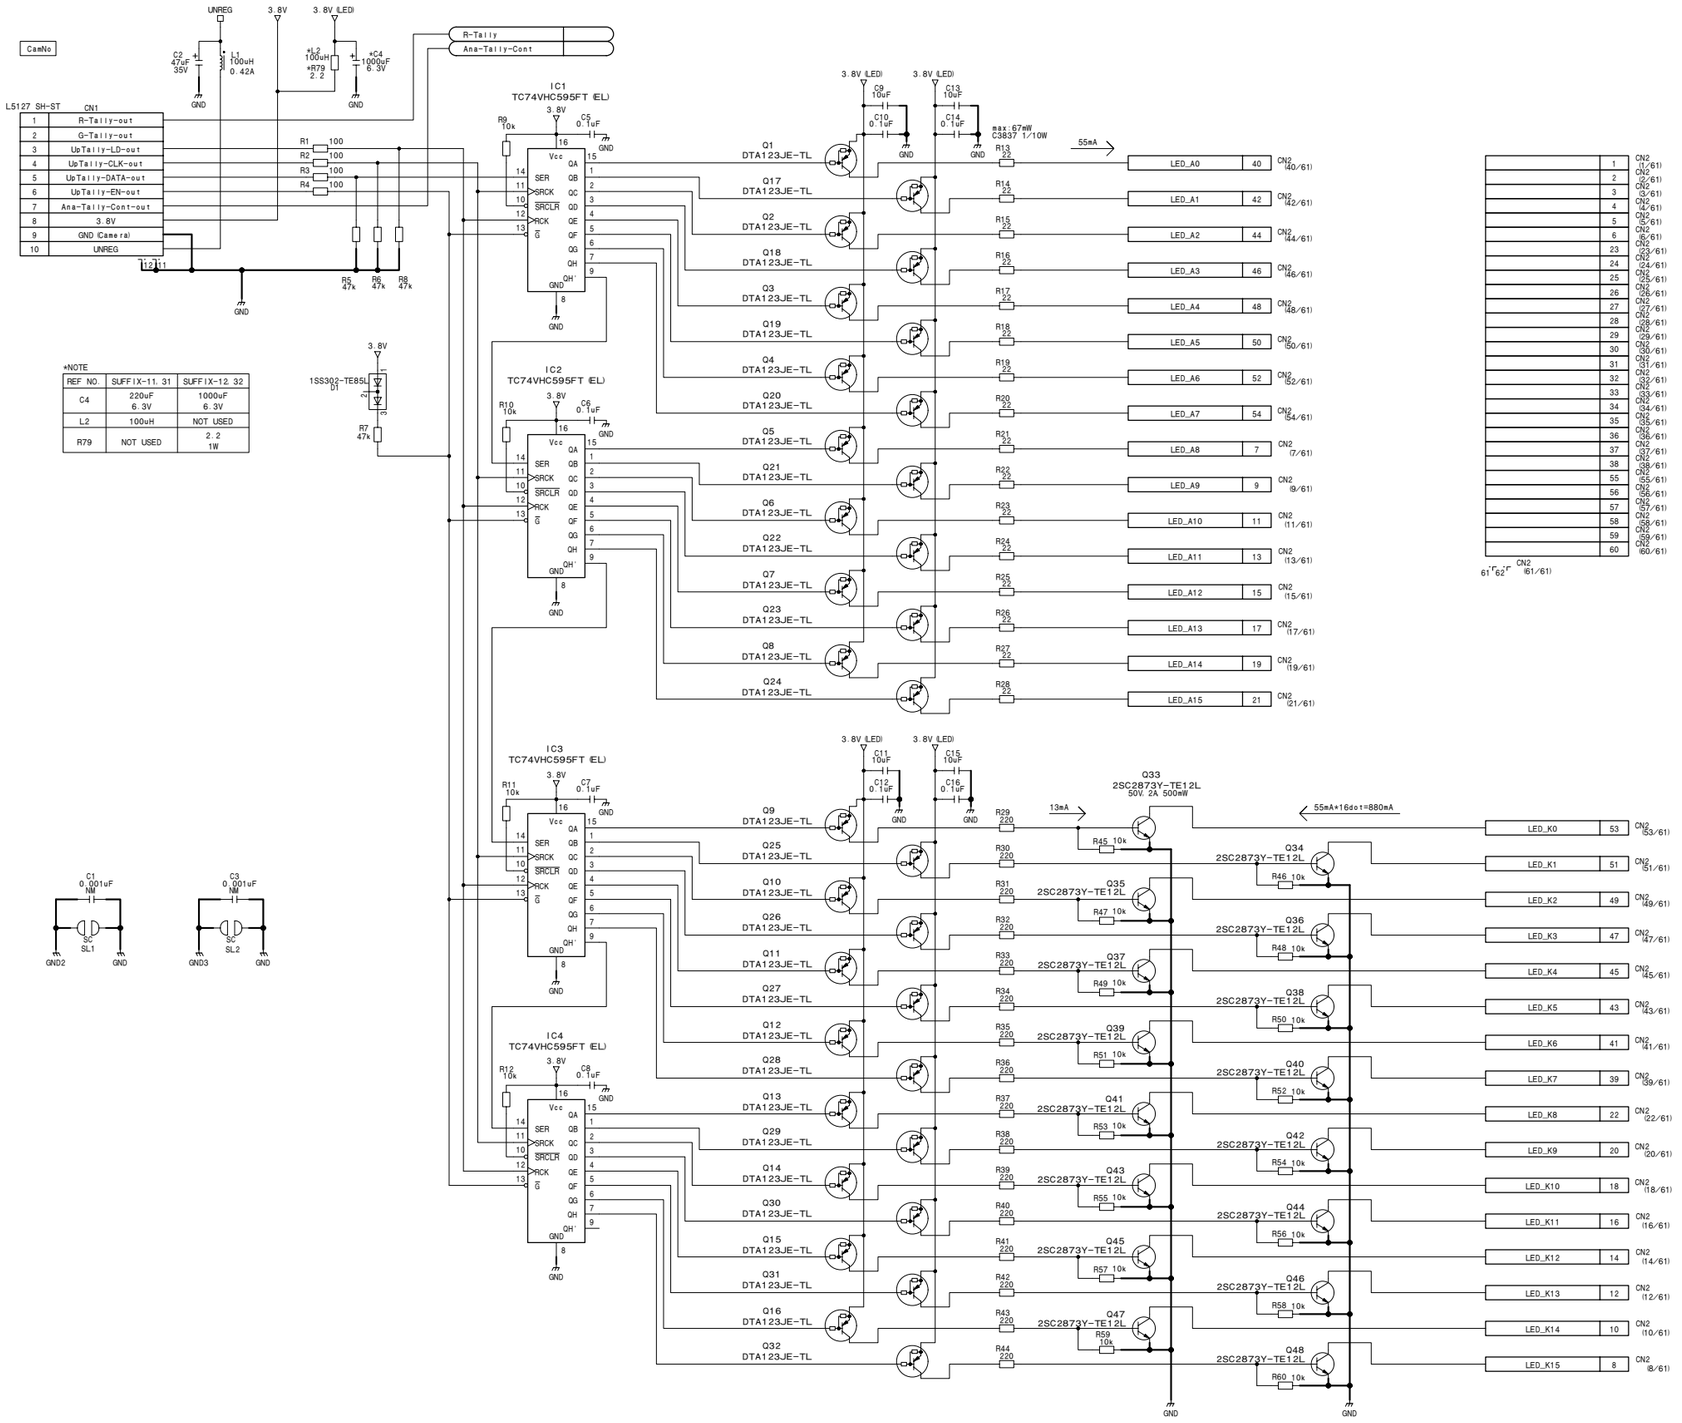BOARD NO. 1-867-407-11, 12, 31, 32

HDC-1000_LE-291_011_1

LE-308
SUFFIX: -12, 31

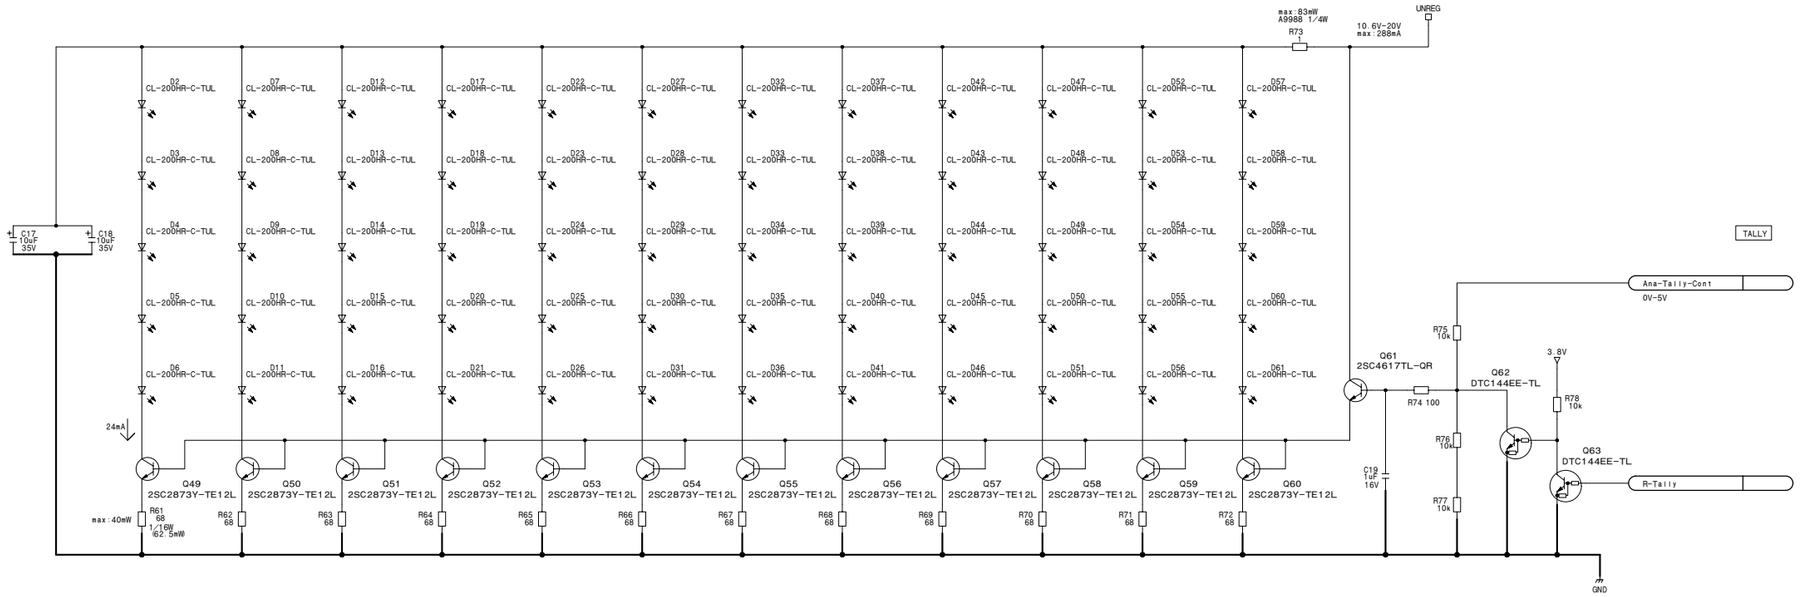


# LE-308

BOARD NO. 1-867-221-12, 31

HDC-1500_LE-308_012_1


4-70

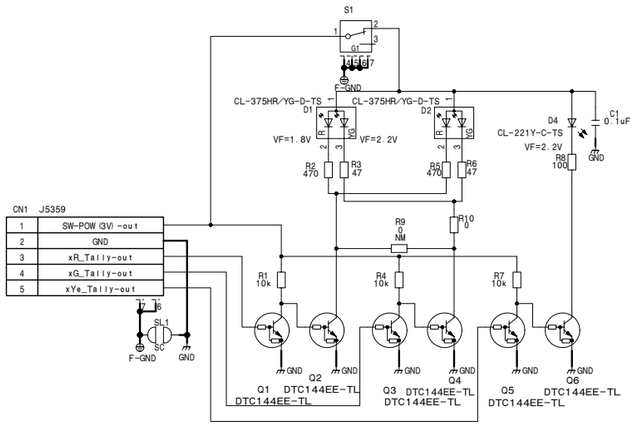**LE-309** **SUFFIX: -11, 31**




**LE-309**
BOARD NO. 1-867-375-11, 31
HDC-1000_LE-309_011_1


VF. Handle-SW (CN-2614)
OHB_100P (F) -CN (0-195-434-01)
DPR-265_200P (M) -CN (1-794-452-11)
Option-board-CN (1-794-308-21)
VDA-63_CN (1-794-308-21)
DAP-33_CN (1-794-308-21)
LENS (CN-2616)
Fr-MIC (CN-2615)
Mem-Stick. SW (CN-2617)
Mem-Stick. SW (CN-2617)


AU-298_CN (1-794-308-21)
AT-163_CN
RE-221_CN (1-794-308-21)
Crane/Tracker/RET (CN-2619)
Incom-Panel (SW-1241)
EXT-DC/Track-DC (CN-2619)
EXT-Connector (CN-2621)
PS-Unit
Built-up
MB-1059
BOARD NO. 1-865-928-14
HDC-1500_MB-1059_014_1

MB-1059, MB-1059G, MB-1059GA
SUFFIX: -15 SUFFIX: -21 SUFFIX: -21, 31

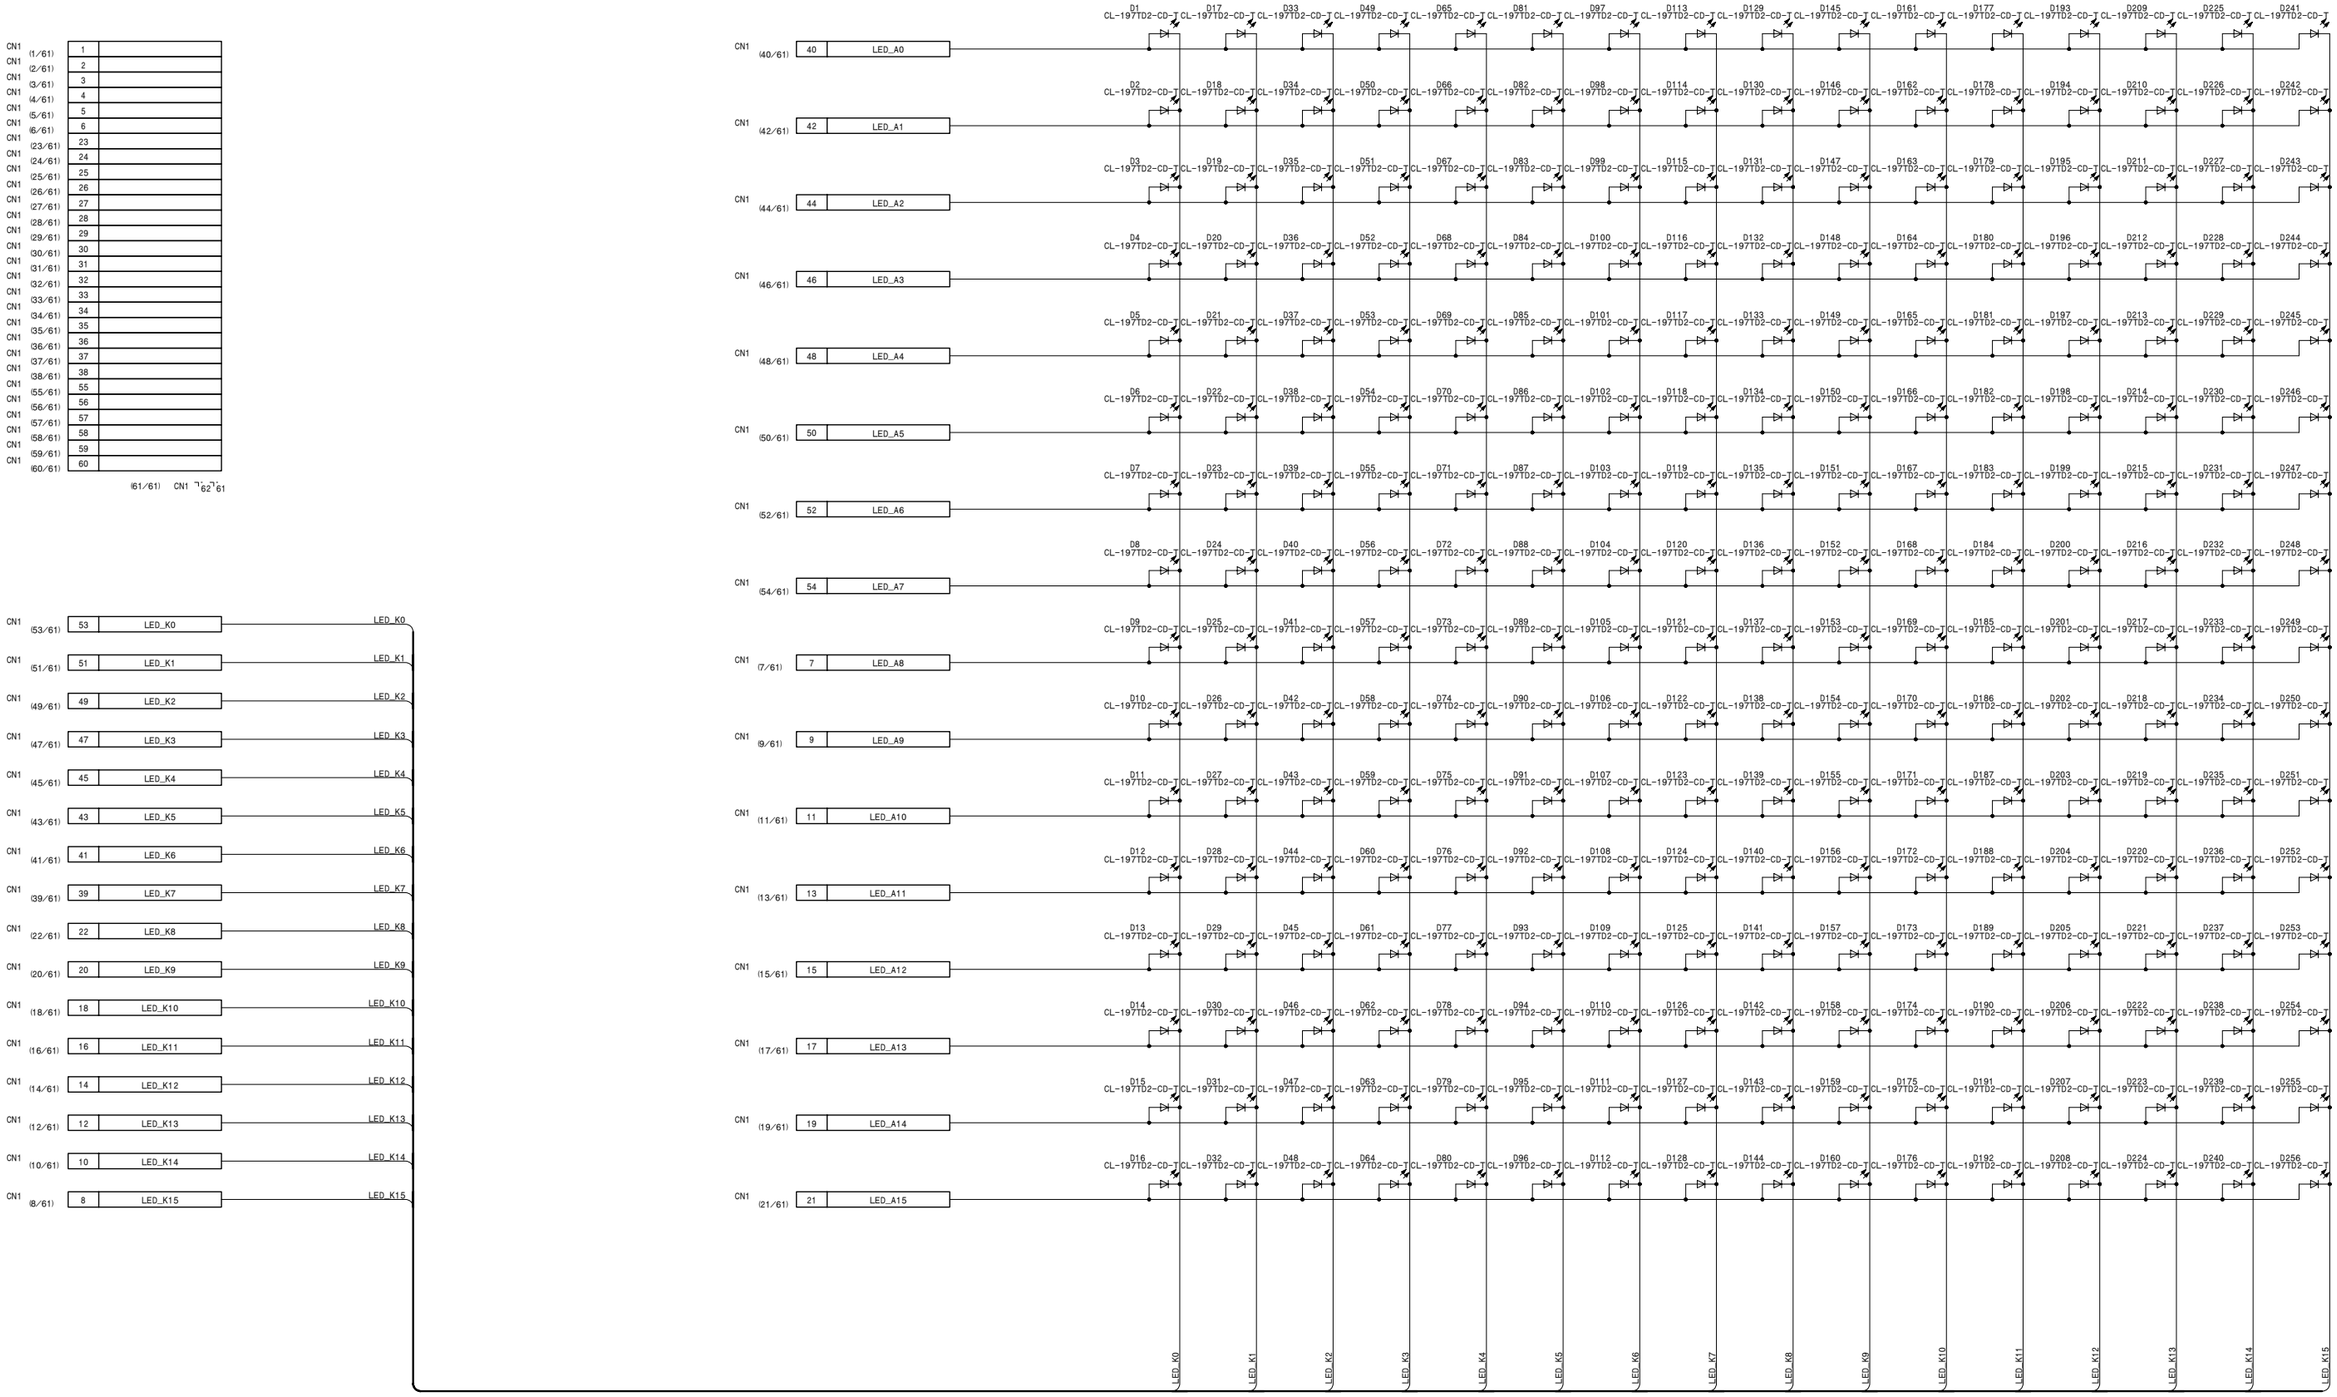

**MB-1059, MB-1059G, MB-1059GA**
**SUFFIX: -15 SUFFIX: -21 SUFFIX: -21, 31**

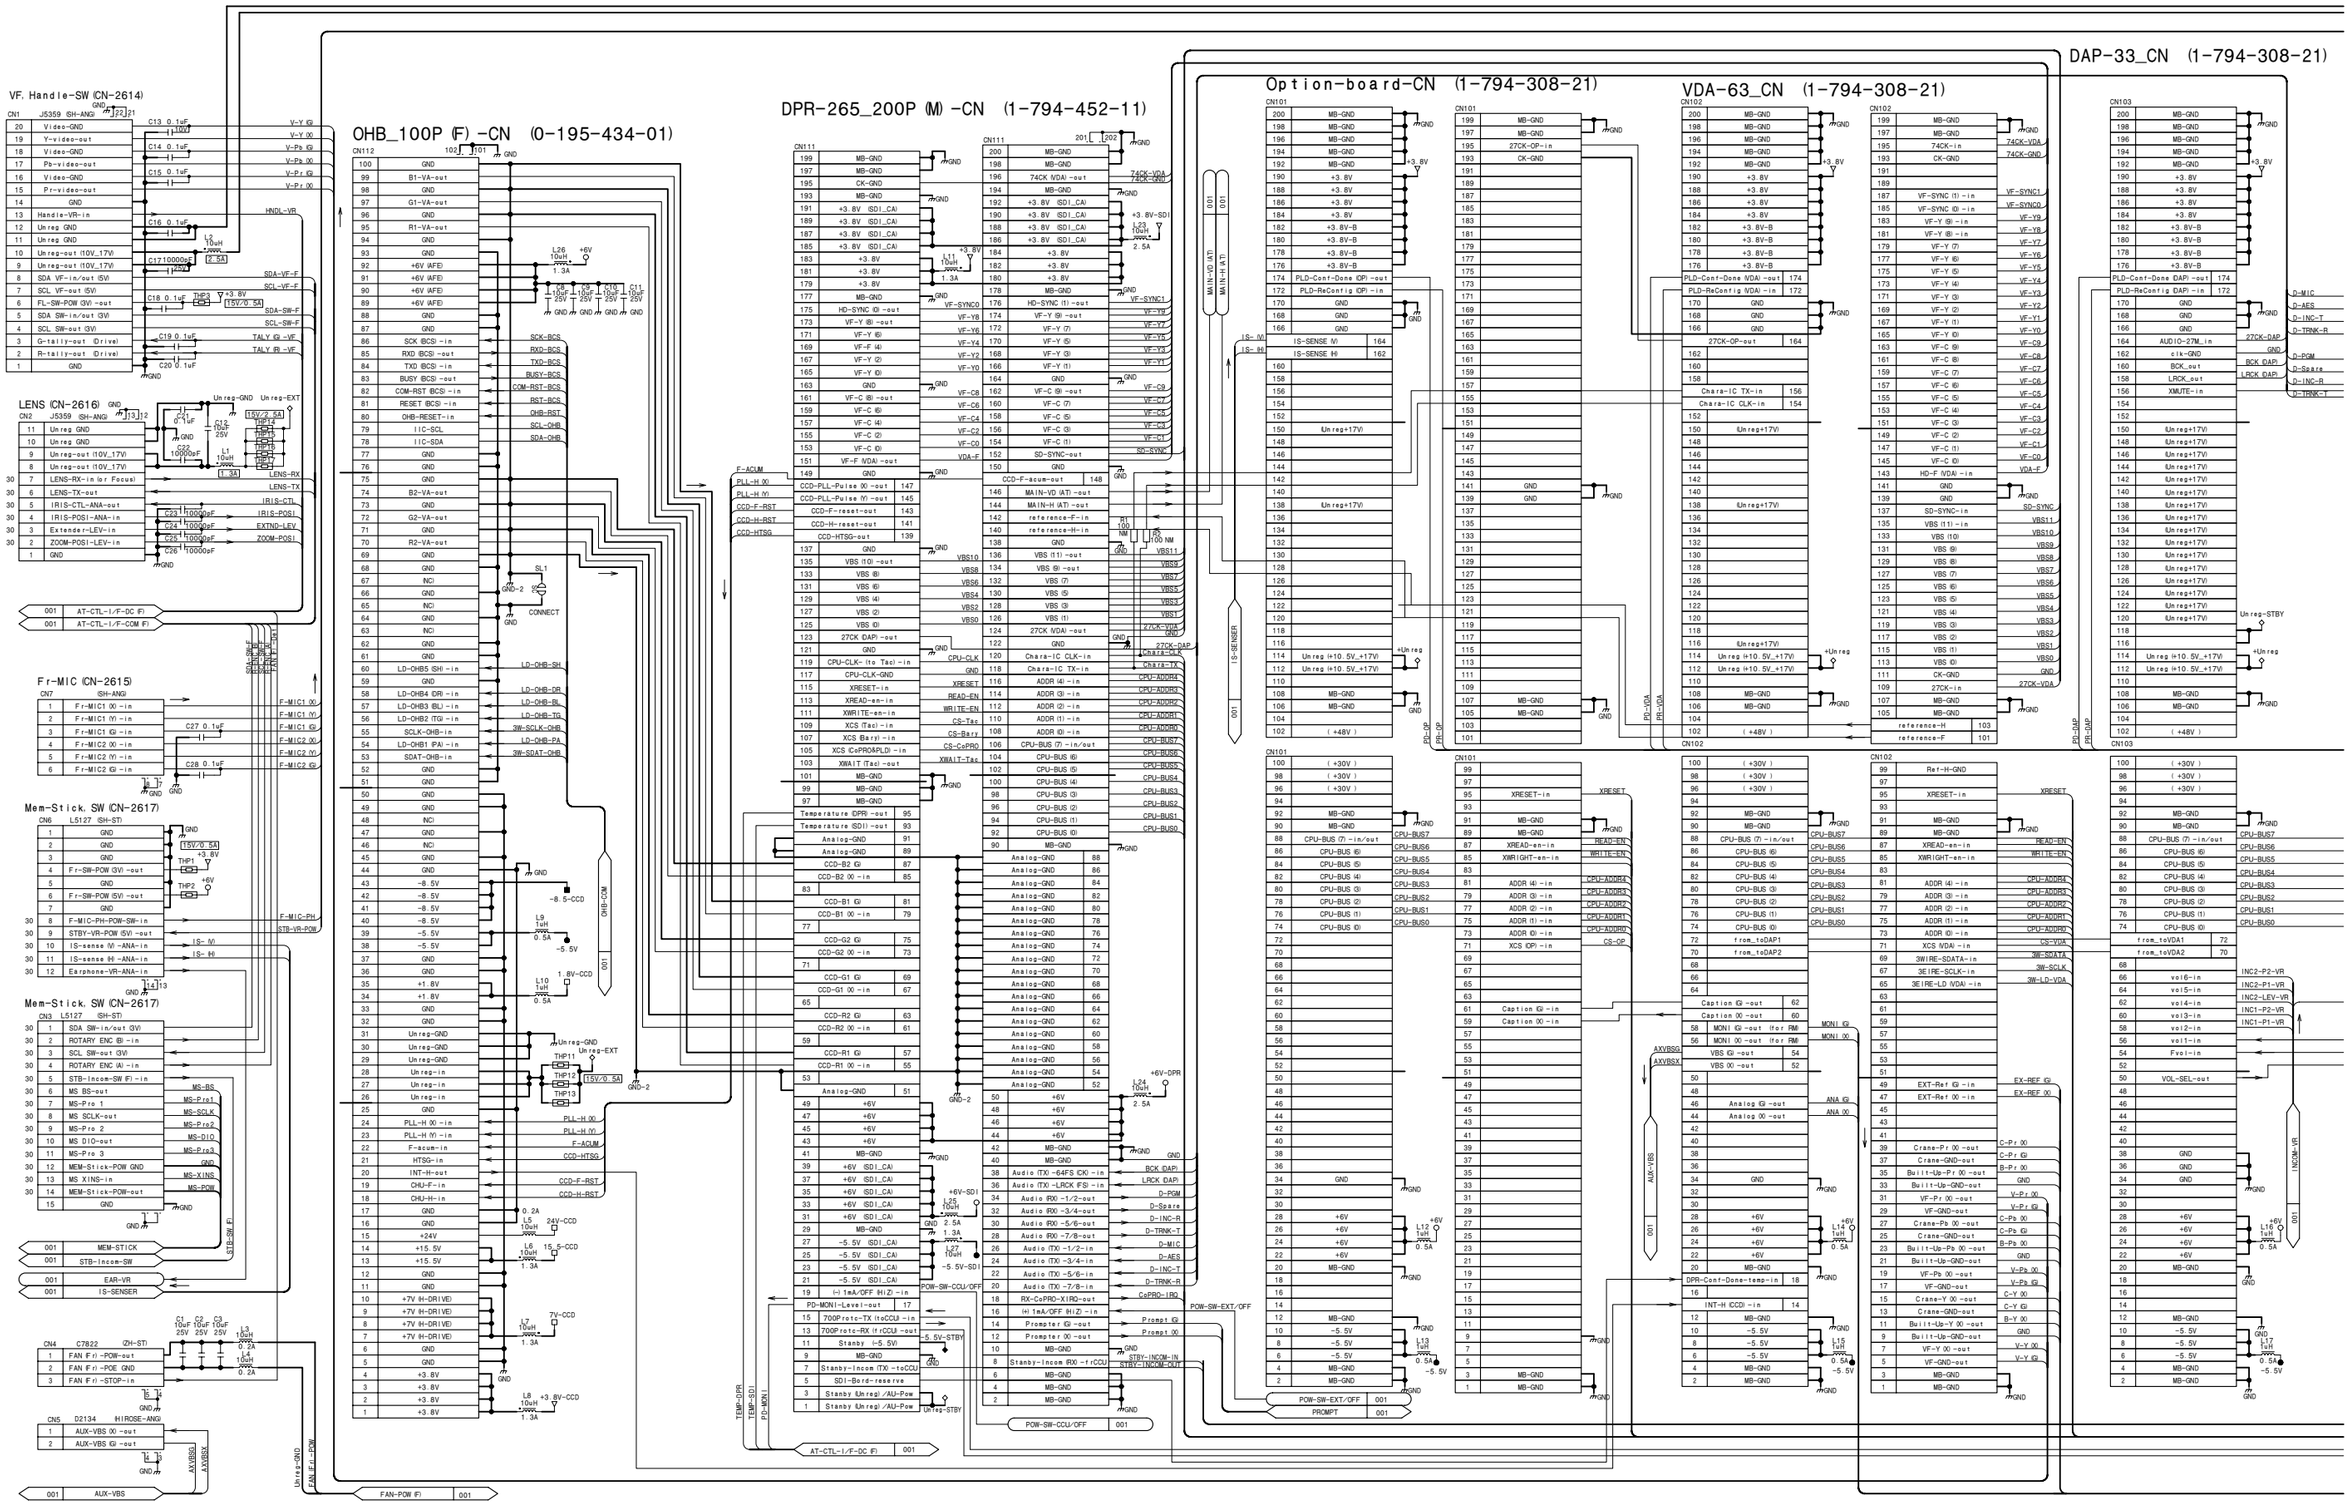


**MB-1059**
BOARD NO. 1-865-928-15

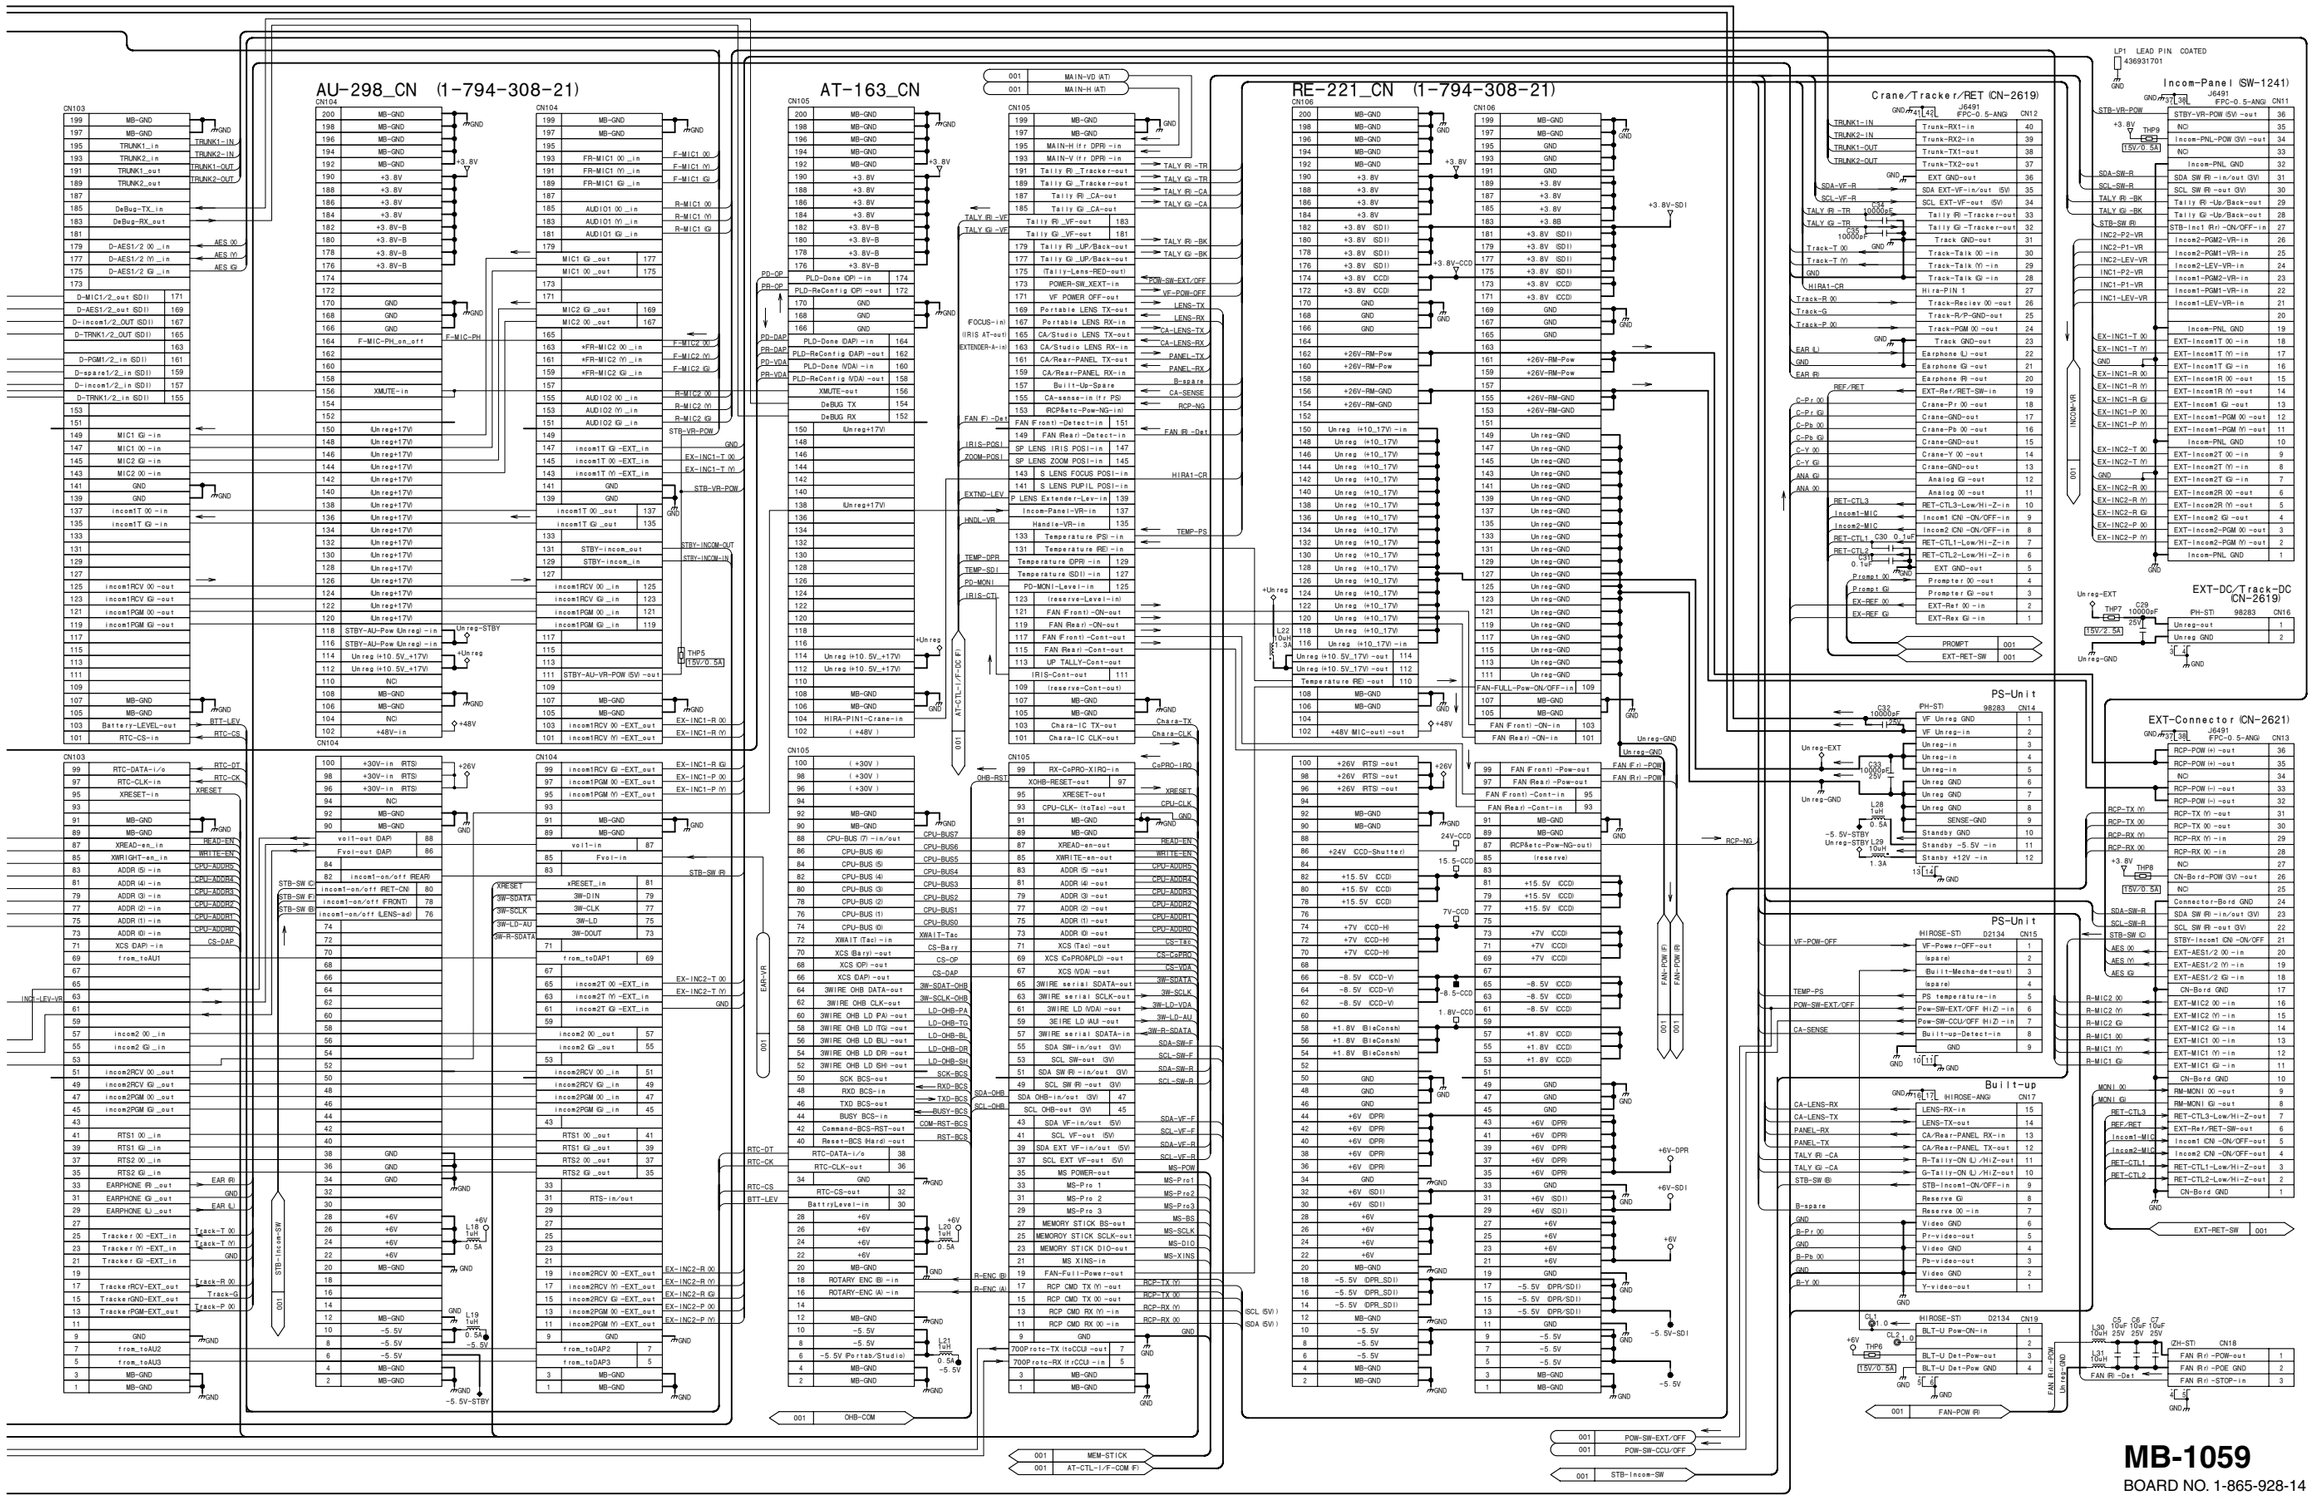**MB-1059G**
BOARD NO. 1-865-928-21
HDC-1500_MB-1059G_021_1

**MB-1059GA**
BOARD NO. 1-865-928-21, 31

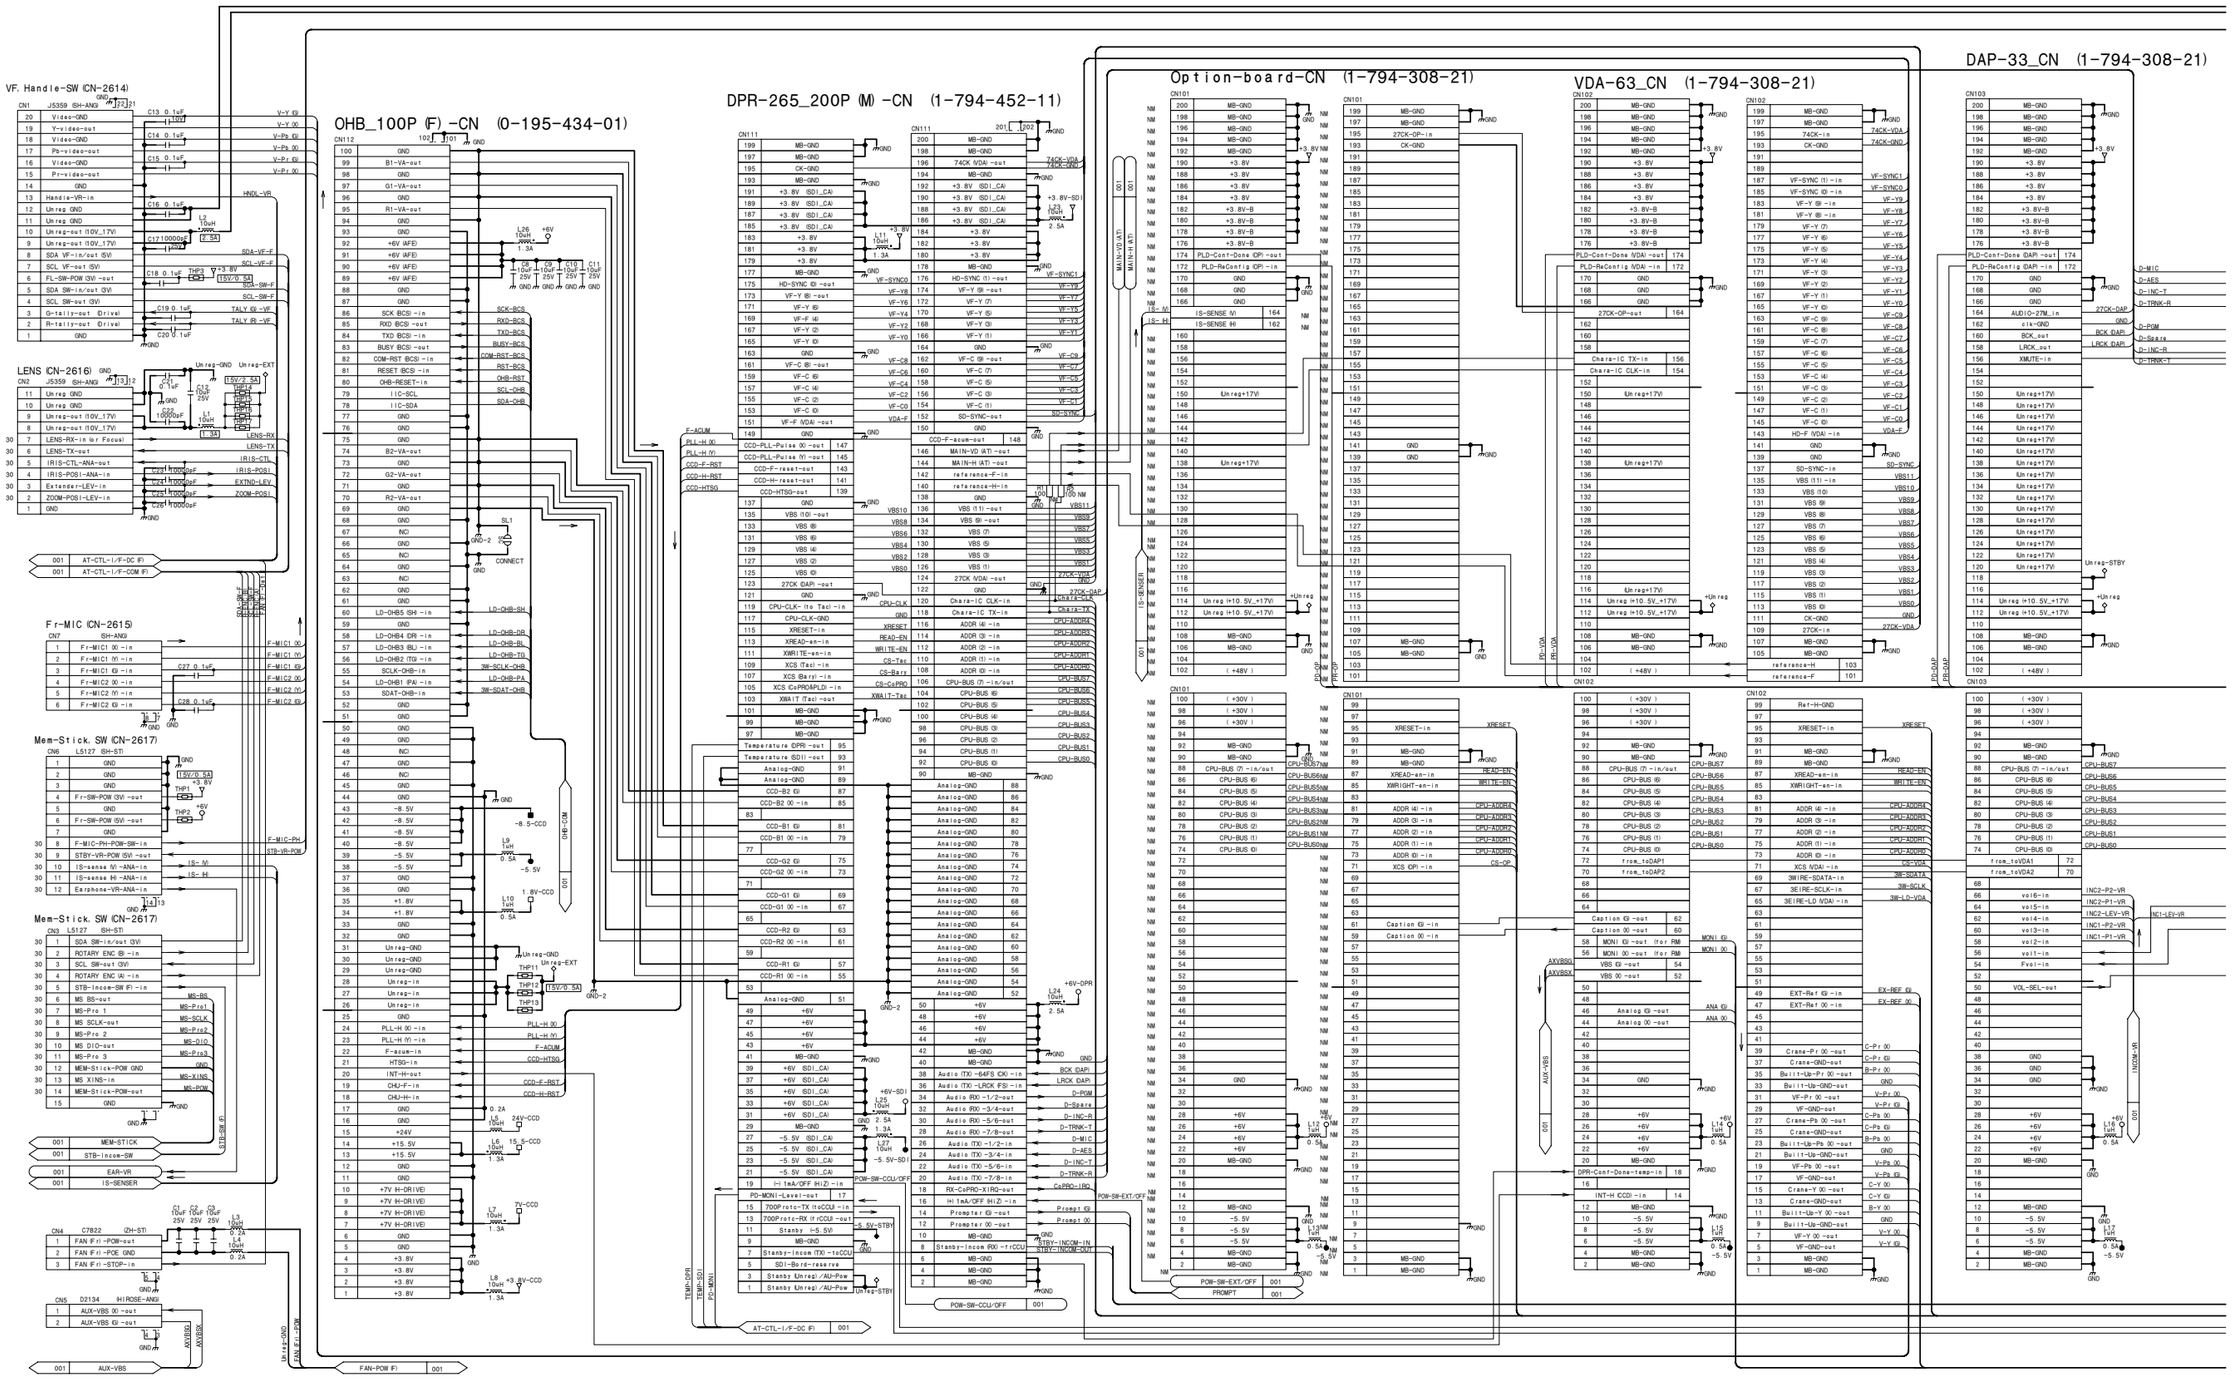**MB-1060 (1/2)**
**SUFFIX: -12, 21, 31**

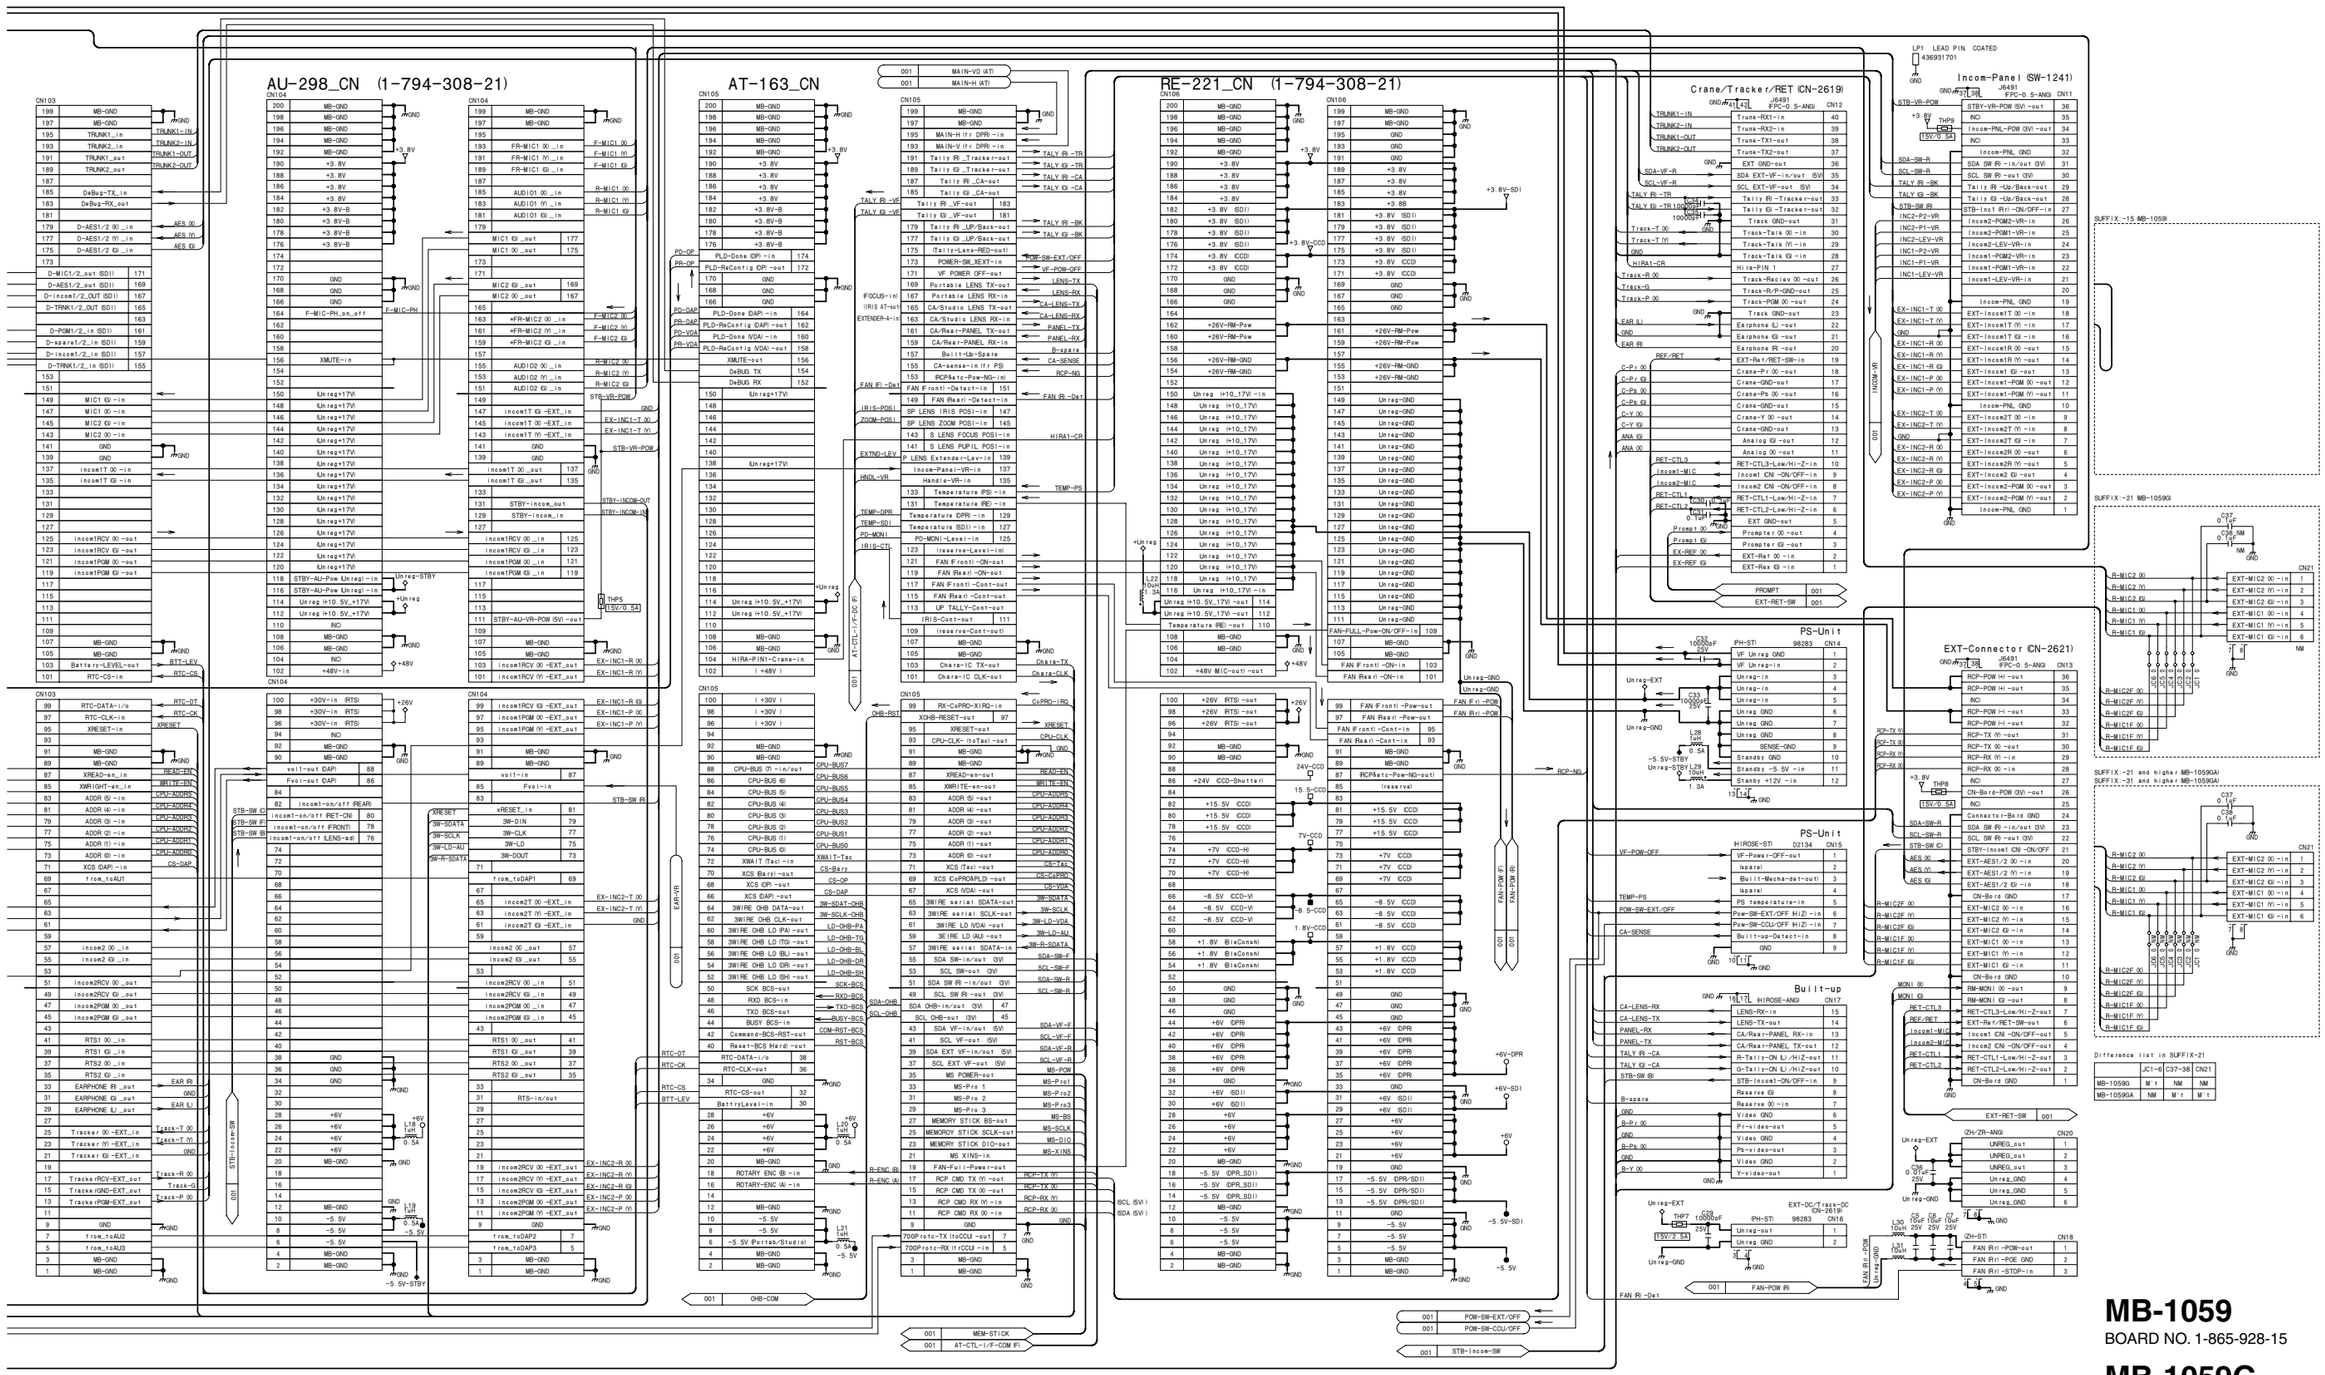



4-74

# MB-1060 (1/2)
SUFFIX: -12, 21, 31

MB-1060 (1/2)
SUFFIX: -12, 21, 31



**MB-1060 (2/2)**
**SUFFIX: -12, 21, 31**

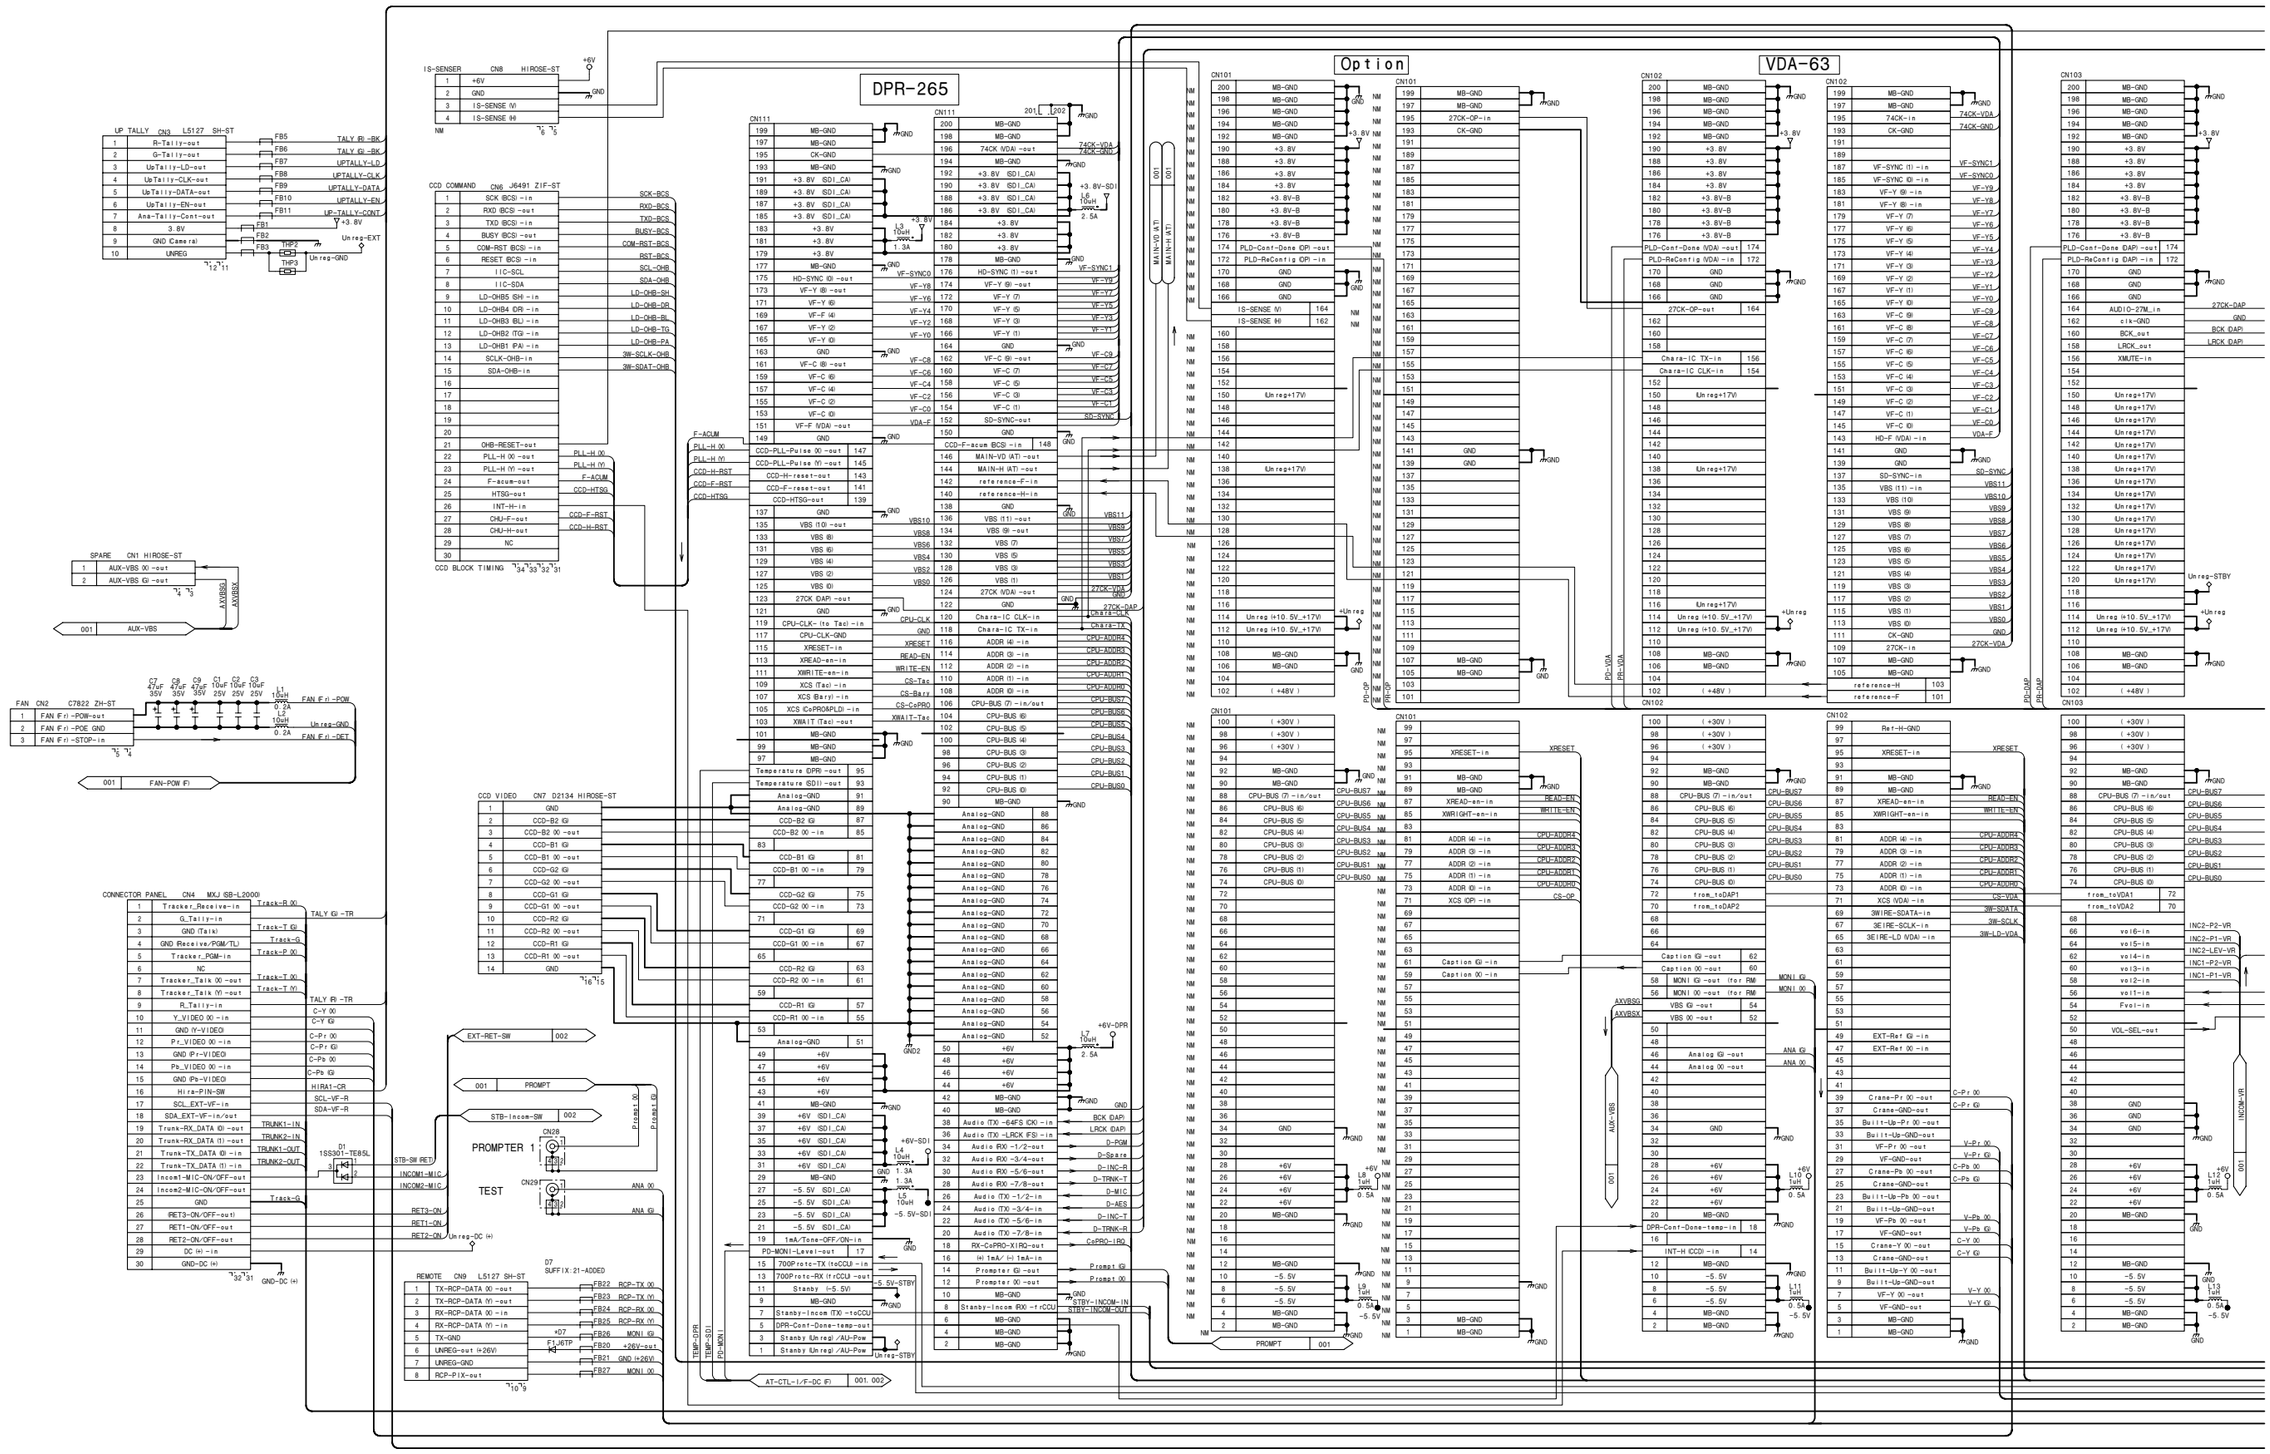


**MB-1060 (2/2)**
BOARD NO. 1-867-461-12, 21, 31
HDC-1000_MB-1060G_021_2

MX-109 (1/2)
SUFFIX: -12, 31

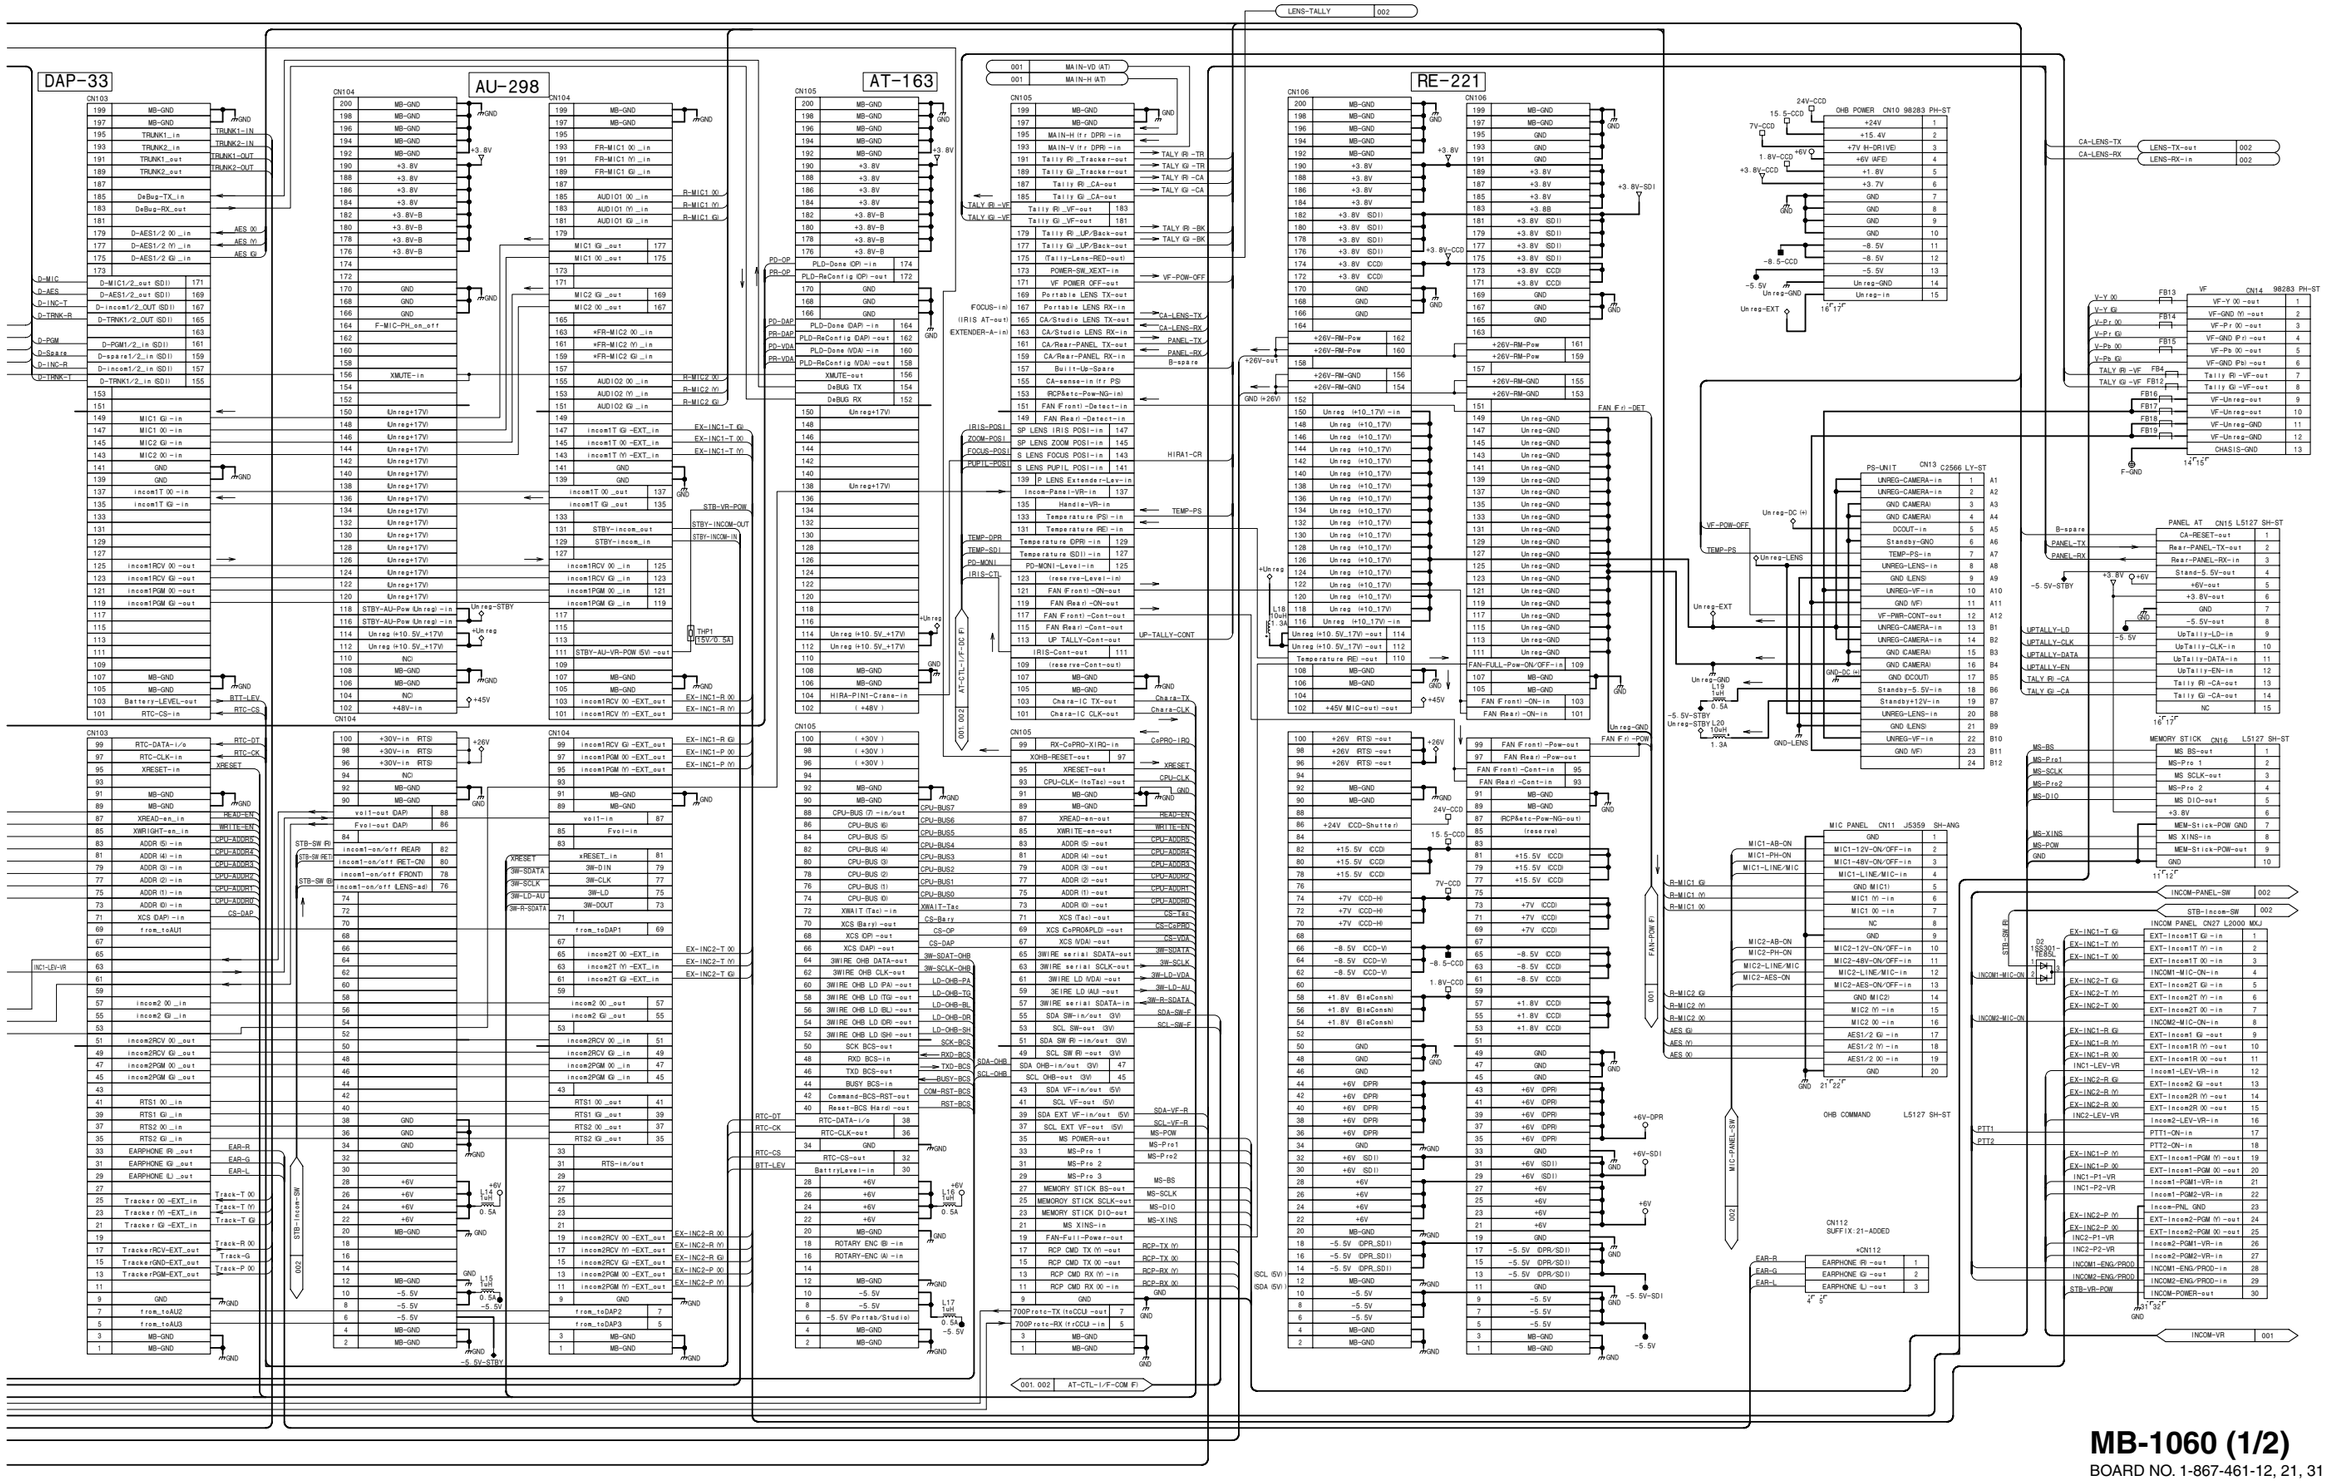



4-78
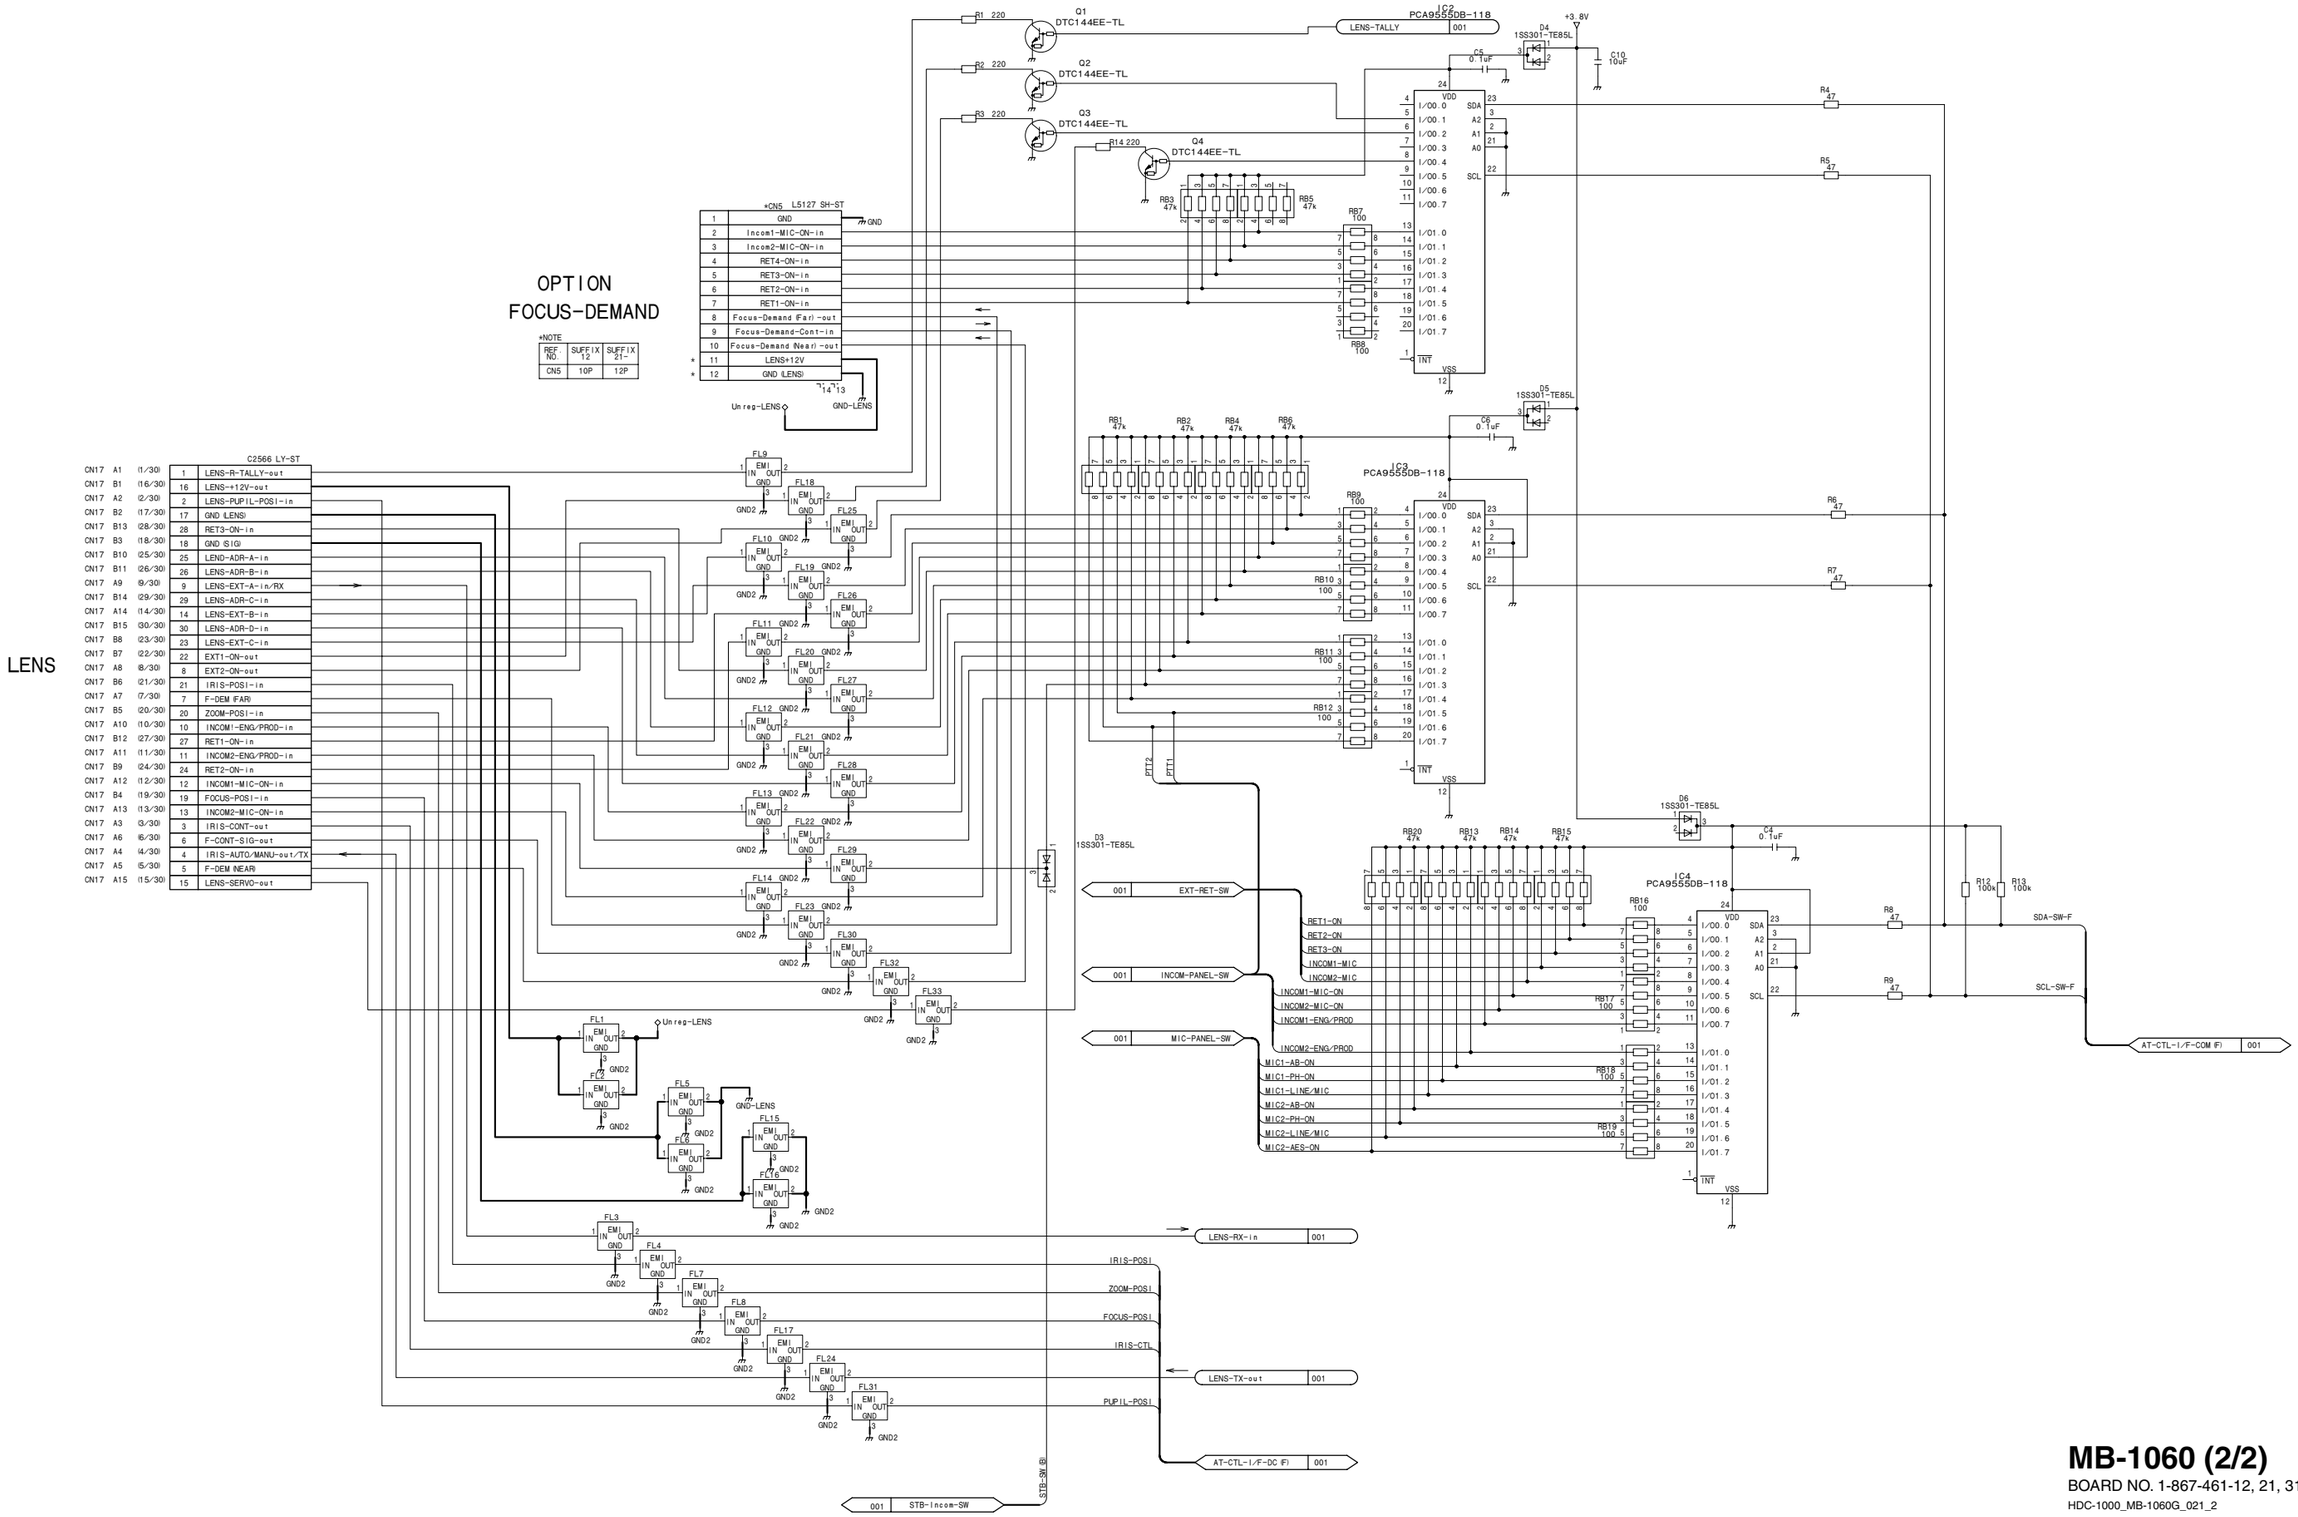
# MX-109 (1/2)

**SUFFIX: -12, 31**

MX-109 (1/2)

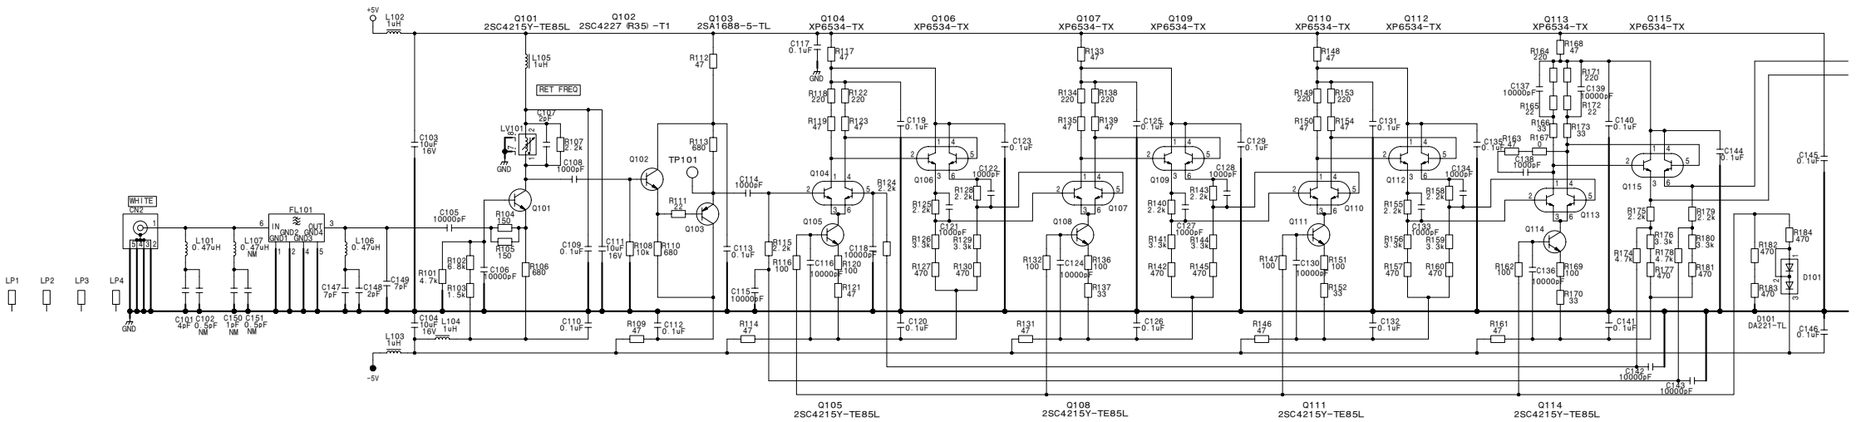SUFFIX: -12, 31




MX-109 (1/2)

BOARD NO. 1-868-409-12, 31

HDC1550_MX-109_013_1

MX-109 (2/2)
SUFFIX: -12, 31

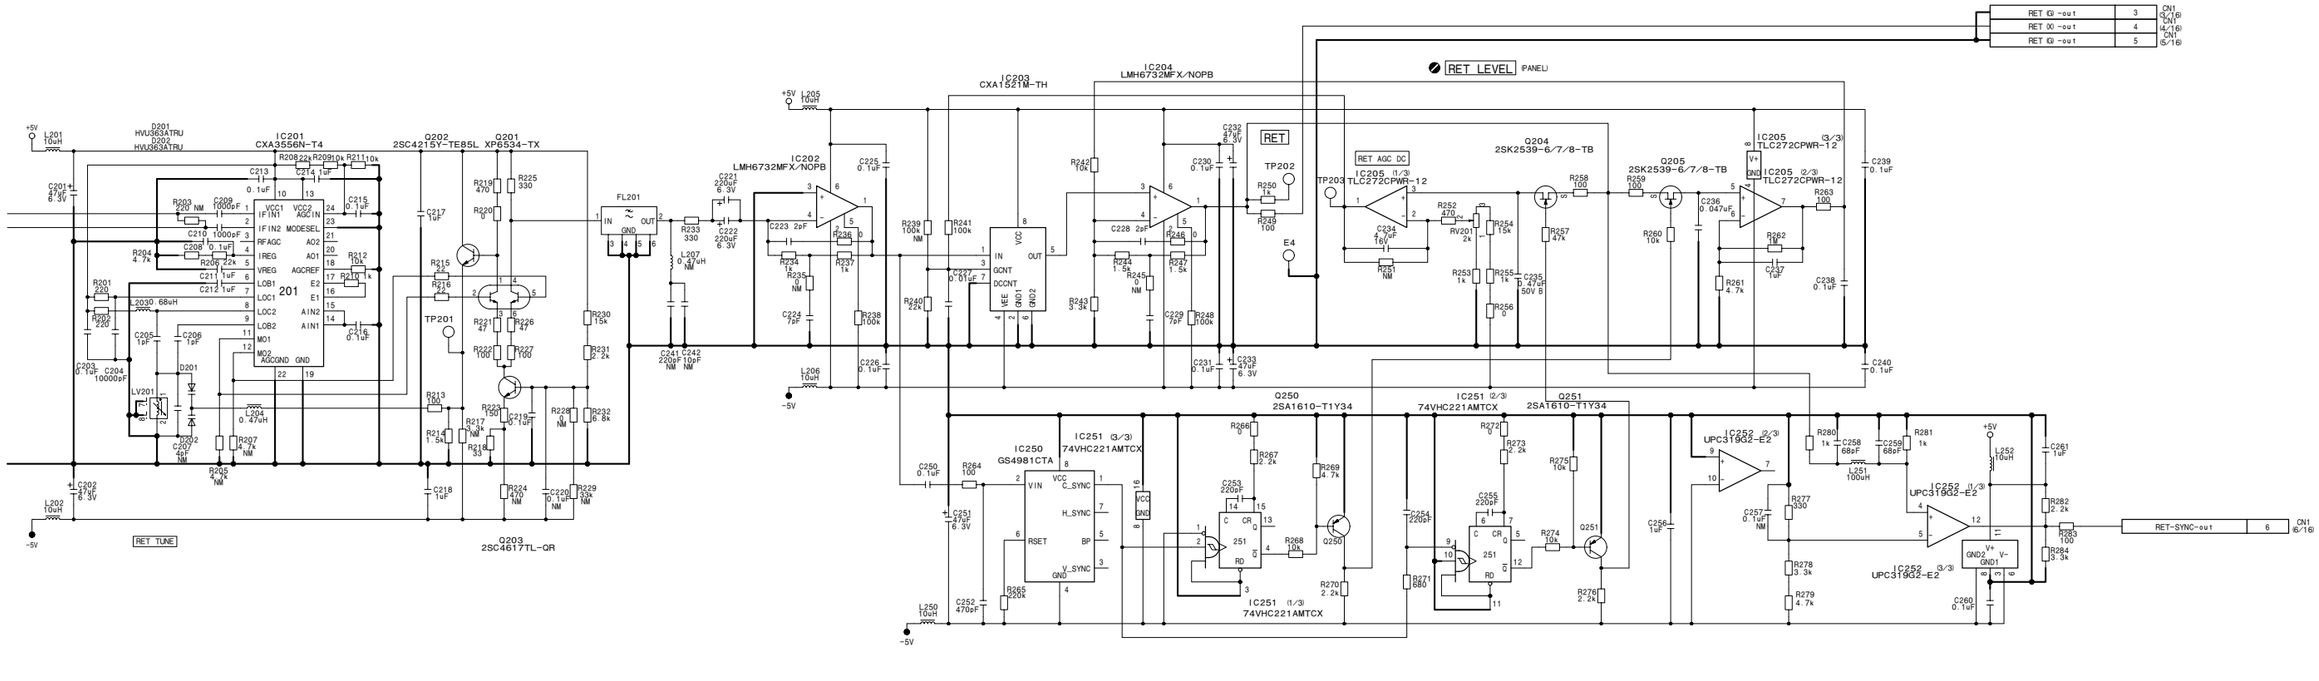SERVICE PARTS No. Suffix:-B and higher





4-80

MX-109 (2/2)
SUFFIX: -12, 31




# MX-109 (2/2)

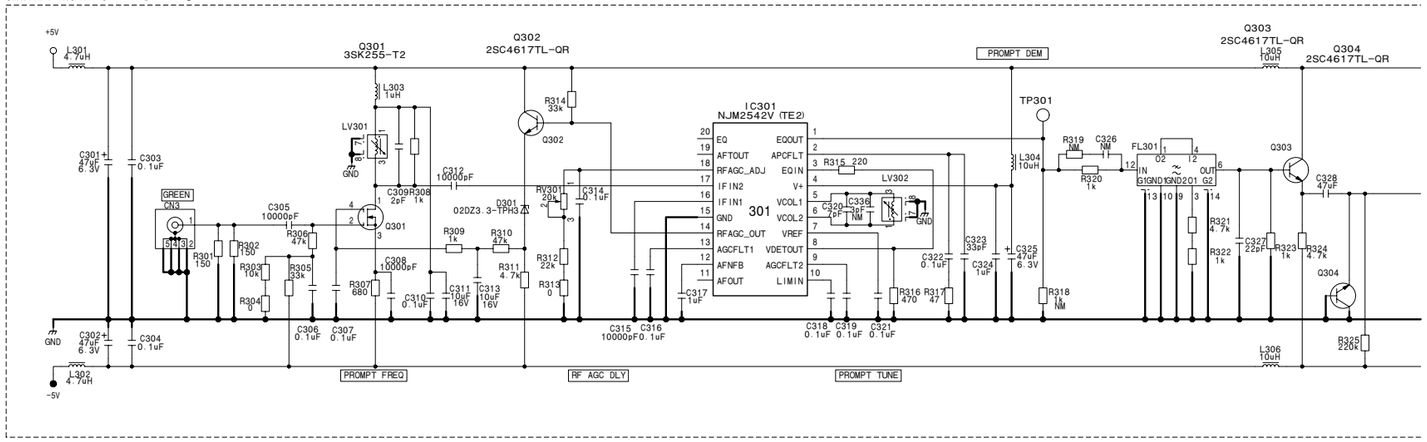BOARD NO. 1-868-409-12, 31

HDC1550_MX-109_013_2

# PA-317 (1/4)
SUFFIX: -14

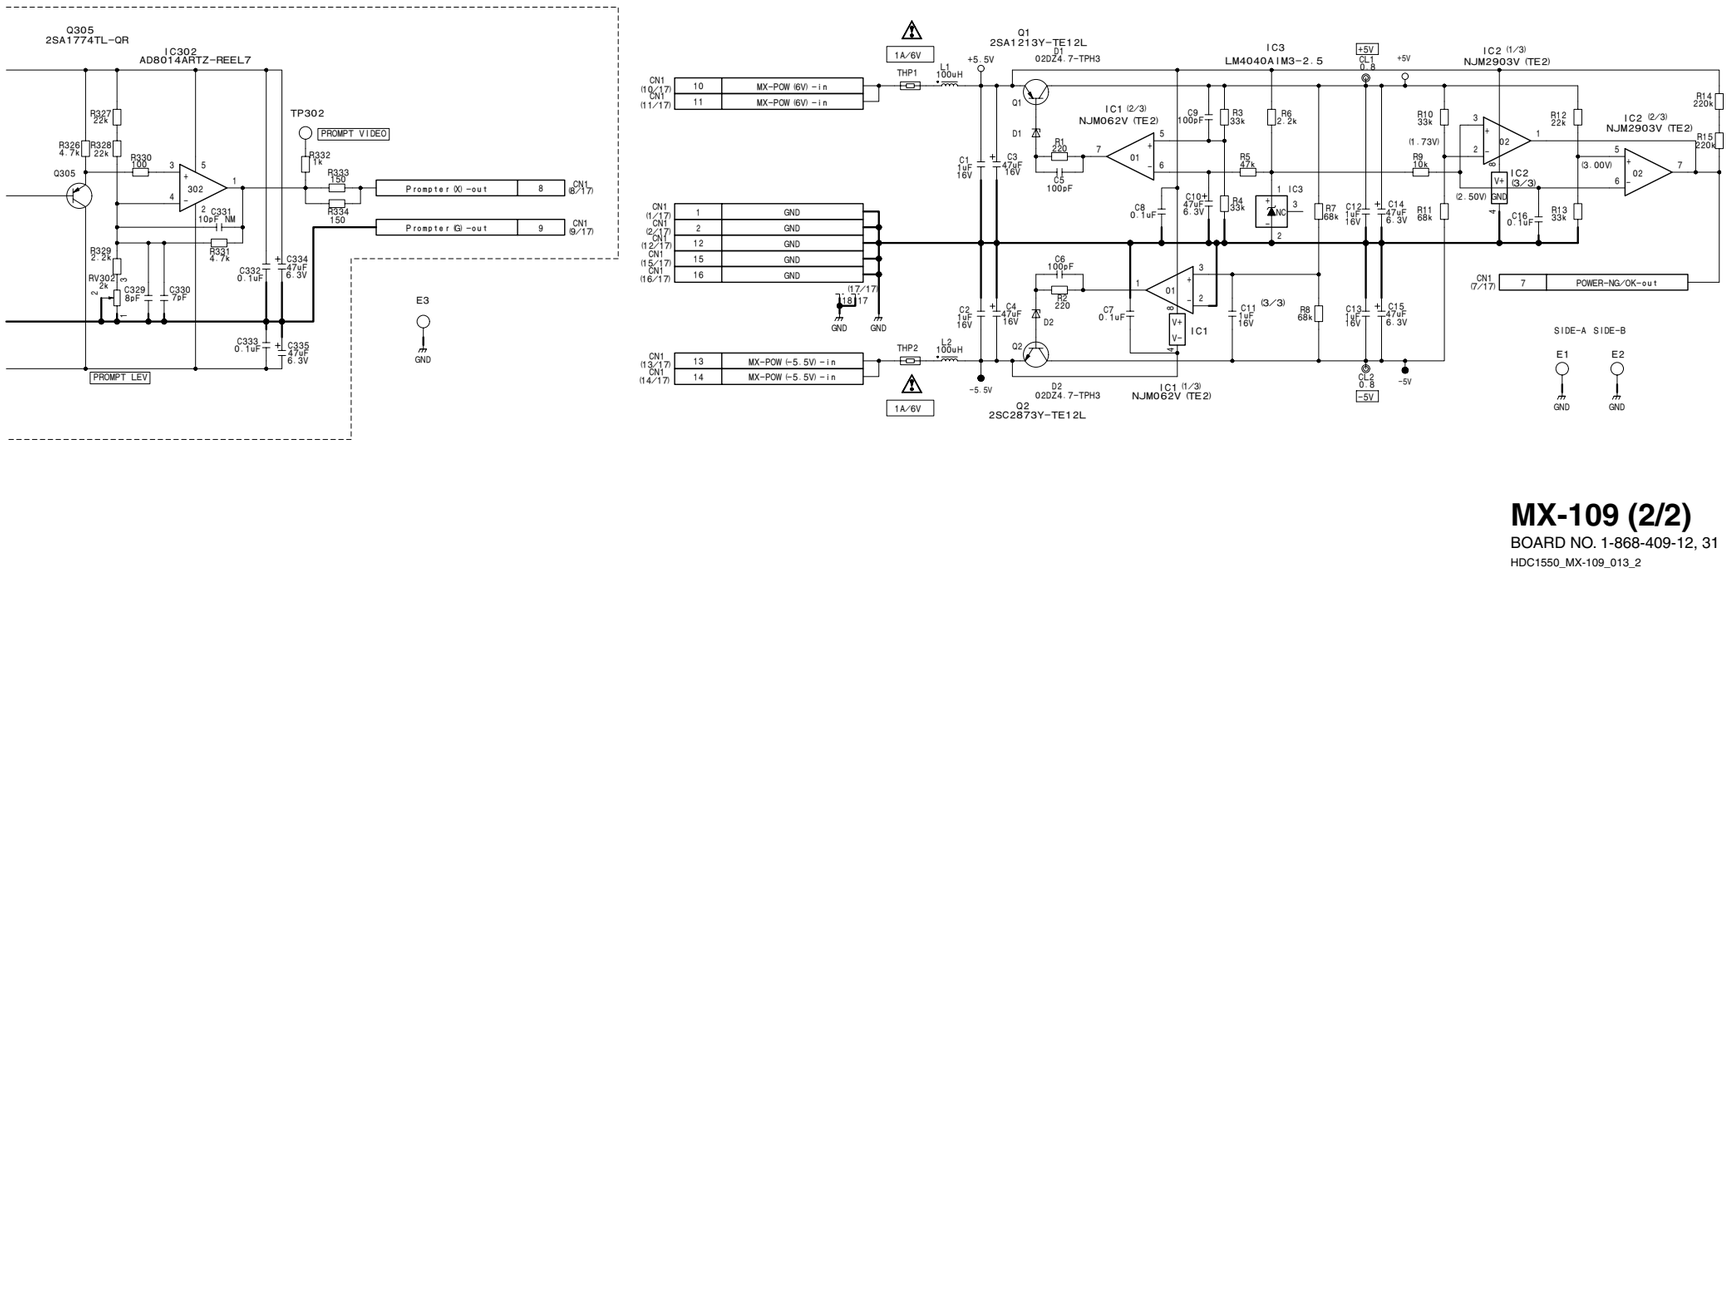PA-317 (1/4)
SUFFIX: -14




# PA-317 (1/4)
BOARD NO. 1-865-971-14
HDC-1500_PA-317_015_1




**PA-317 (2/4)**
BOARD NO. 1-865-971-14
HDC-1500_PA-317_015_2

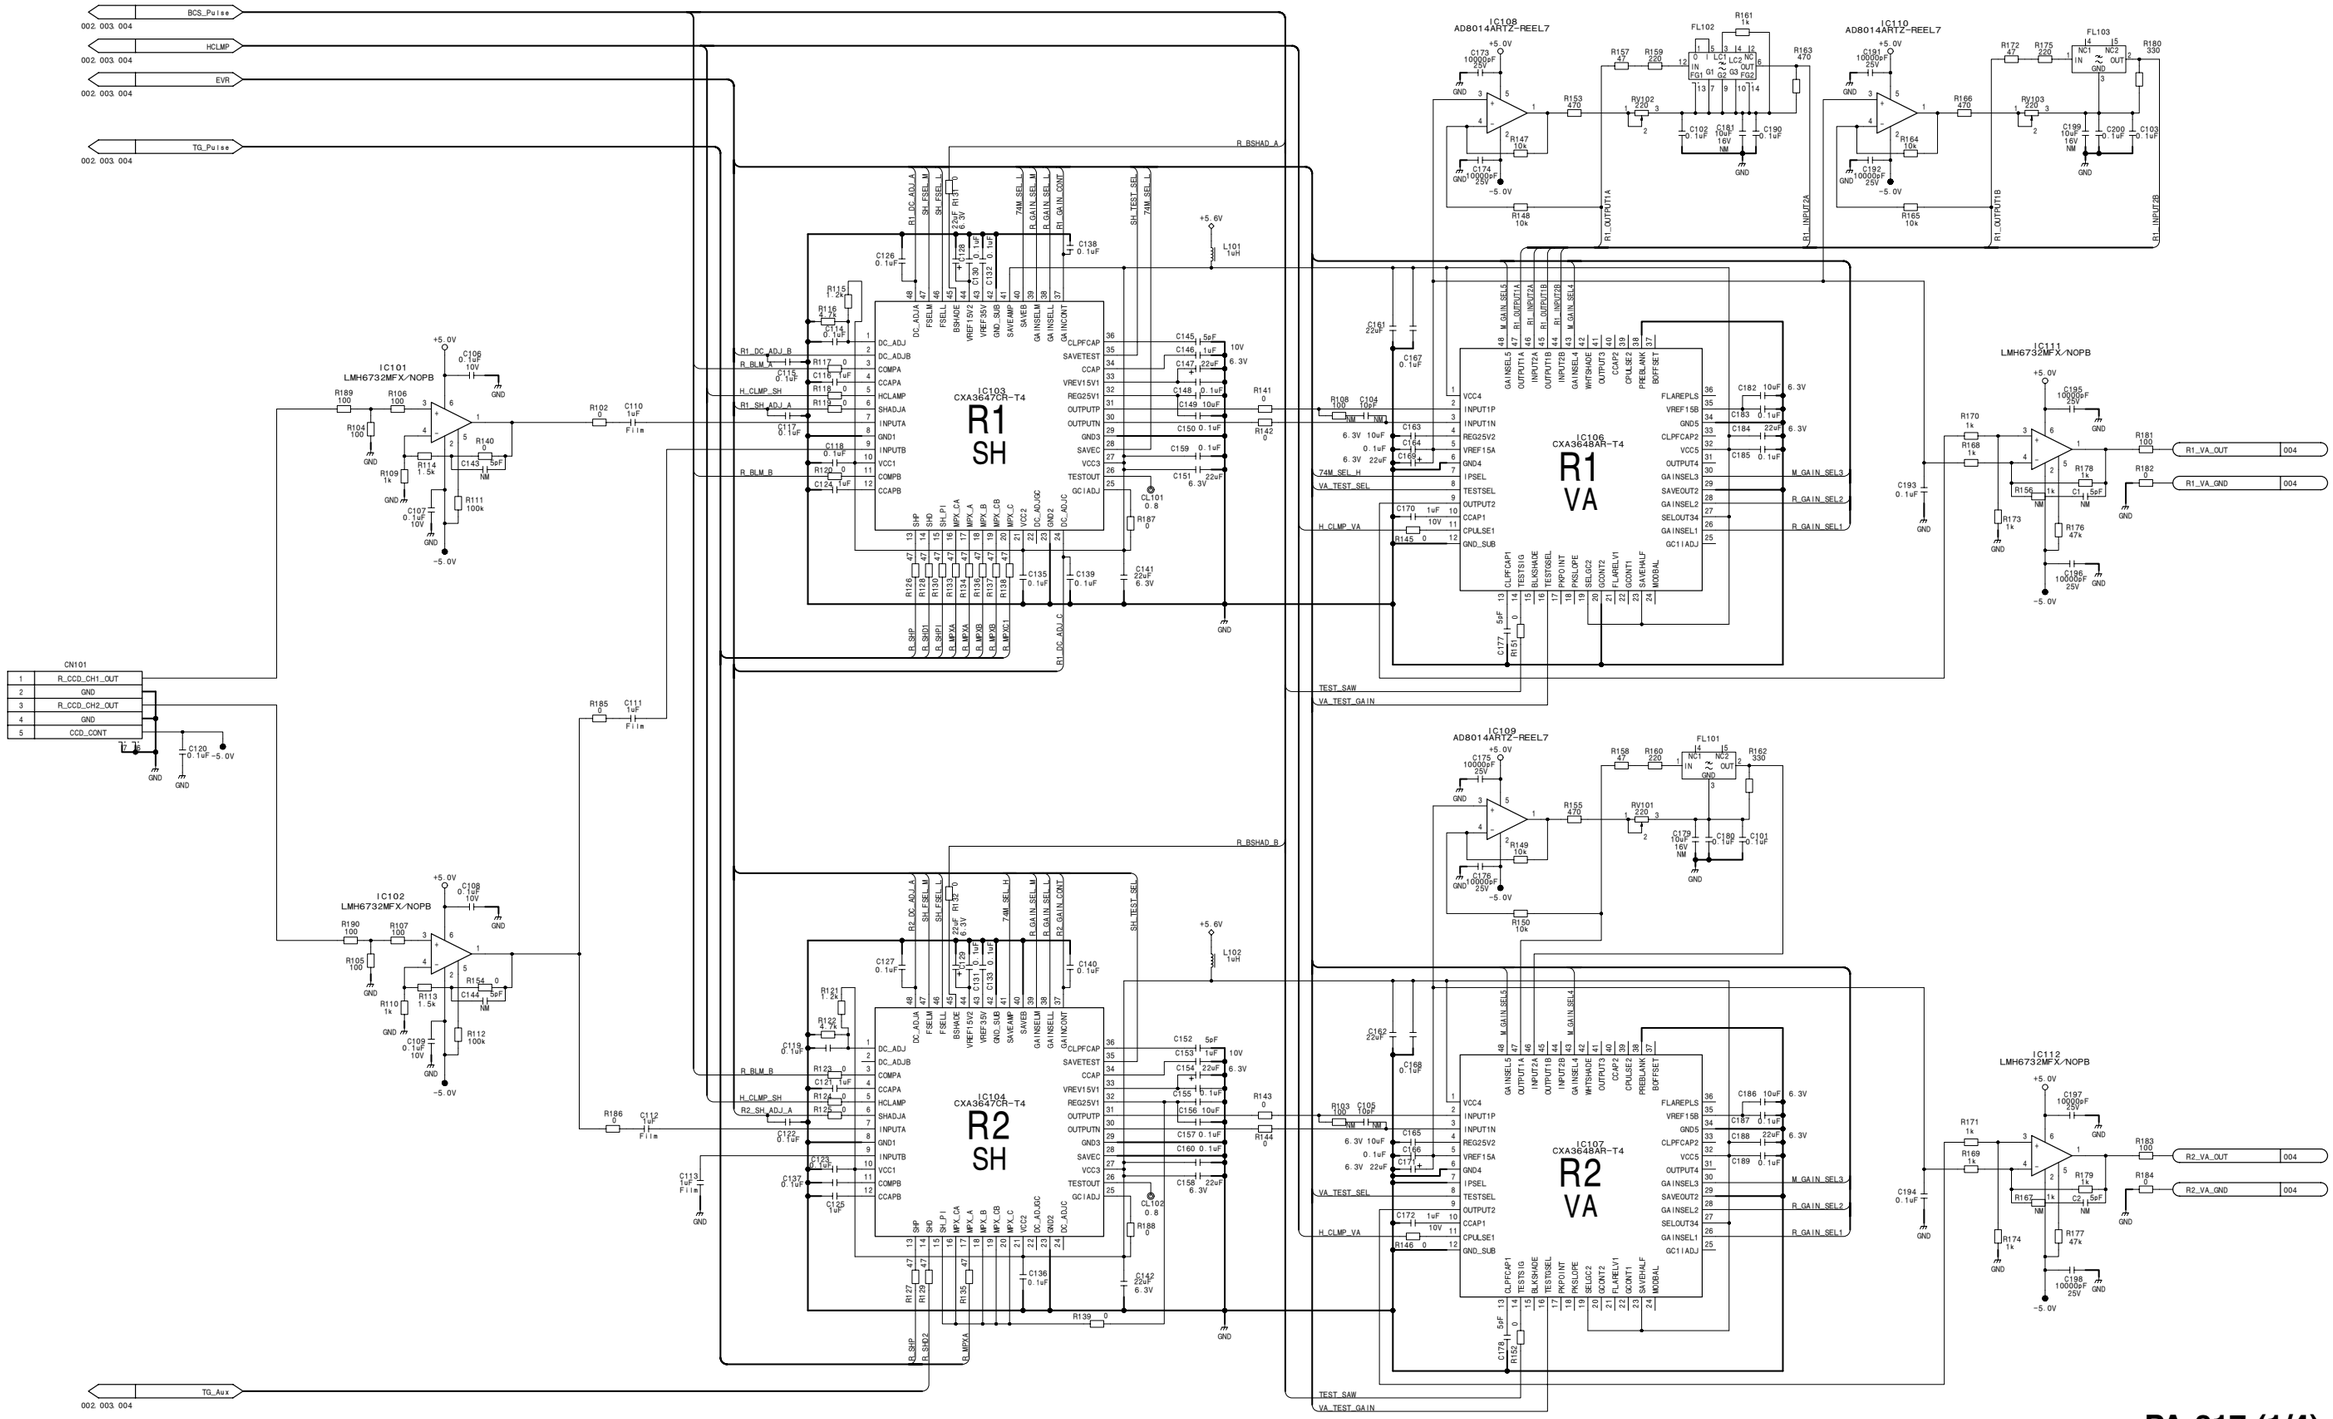


**PA-317 (3/4)**
BOARD NO. 1-865-971-14
HDC-1500_PA-317_015_3

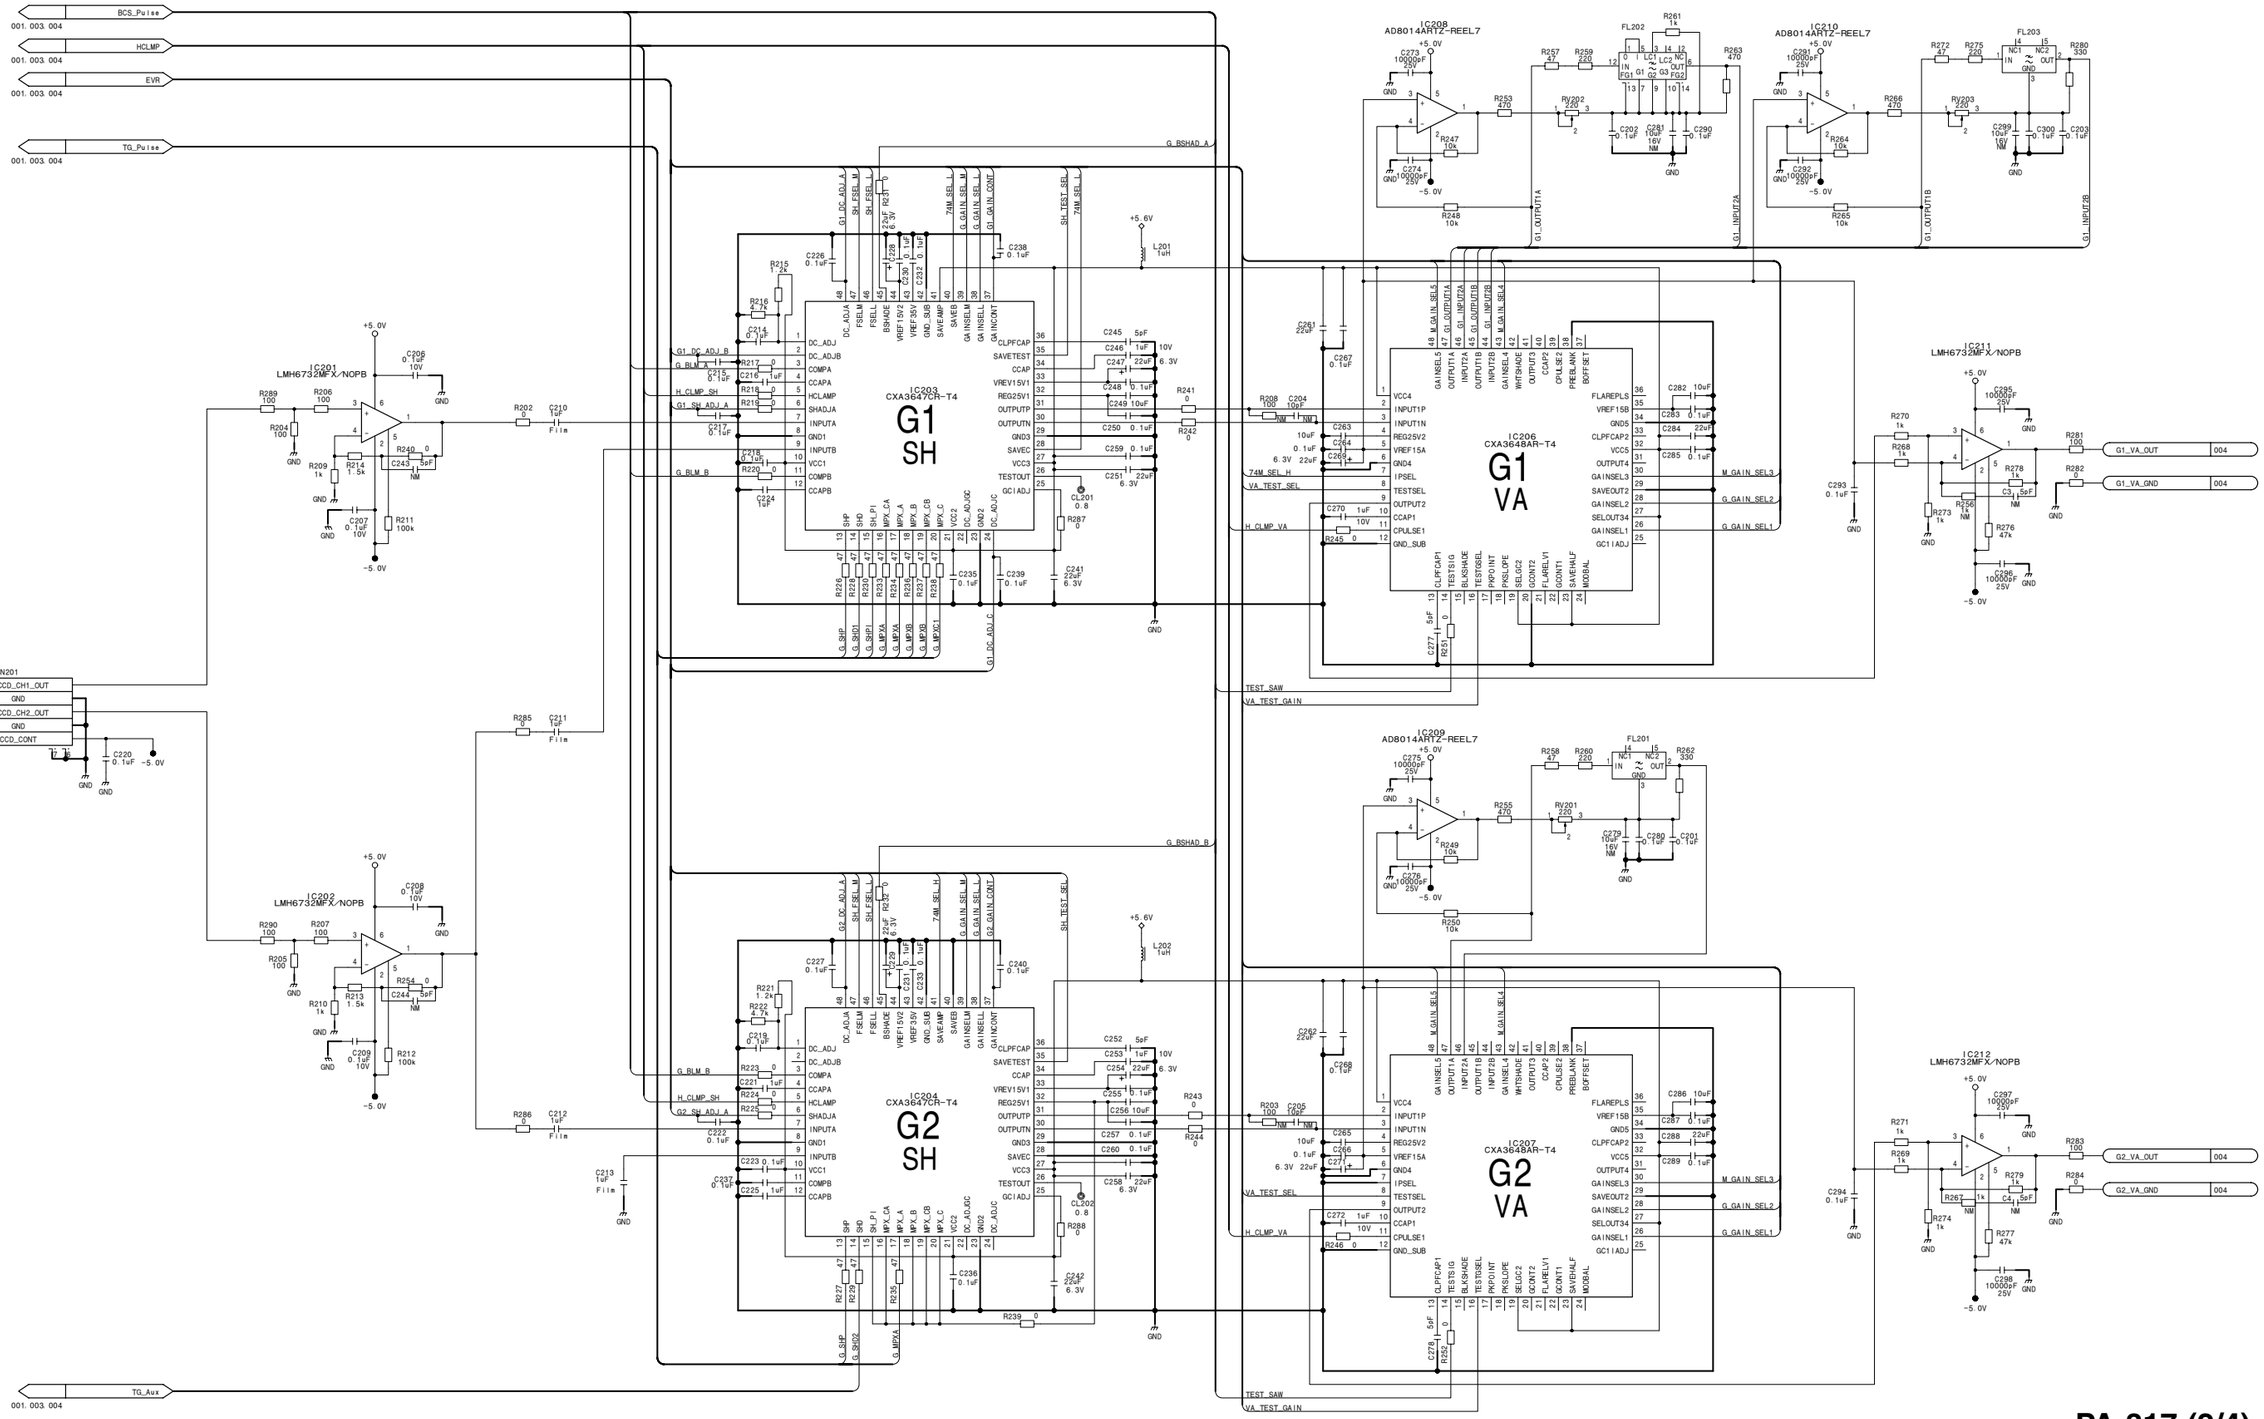


**PA-317 (4/4)**
BOARD NO. 1-865-971-14
HDC-1500_PA-317_015_4

# PA-317 (1/4)

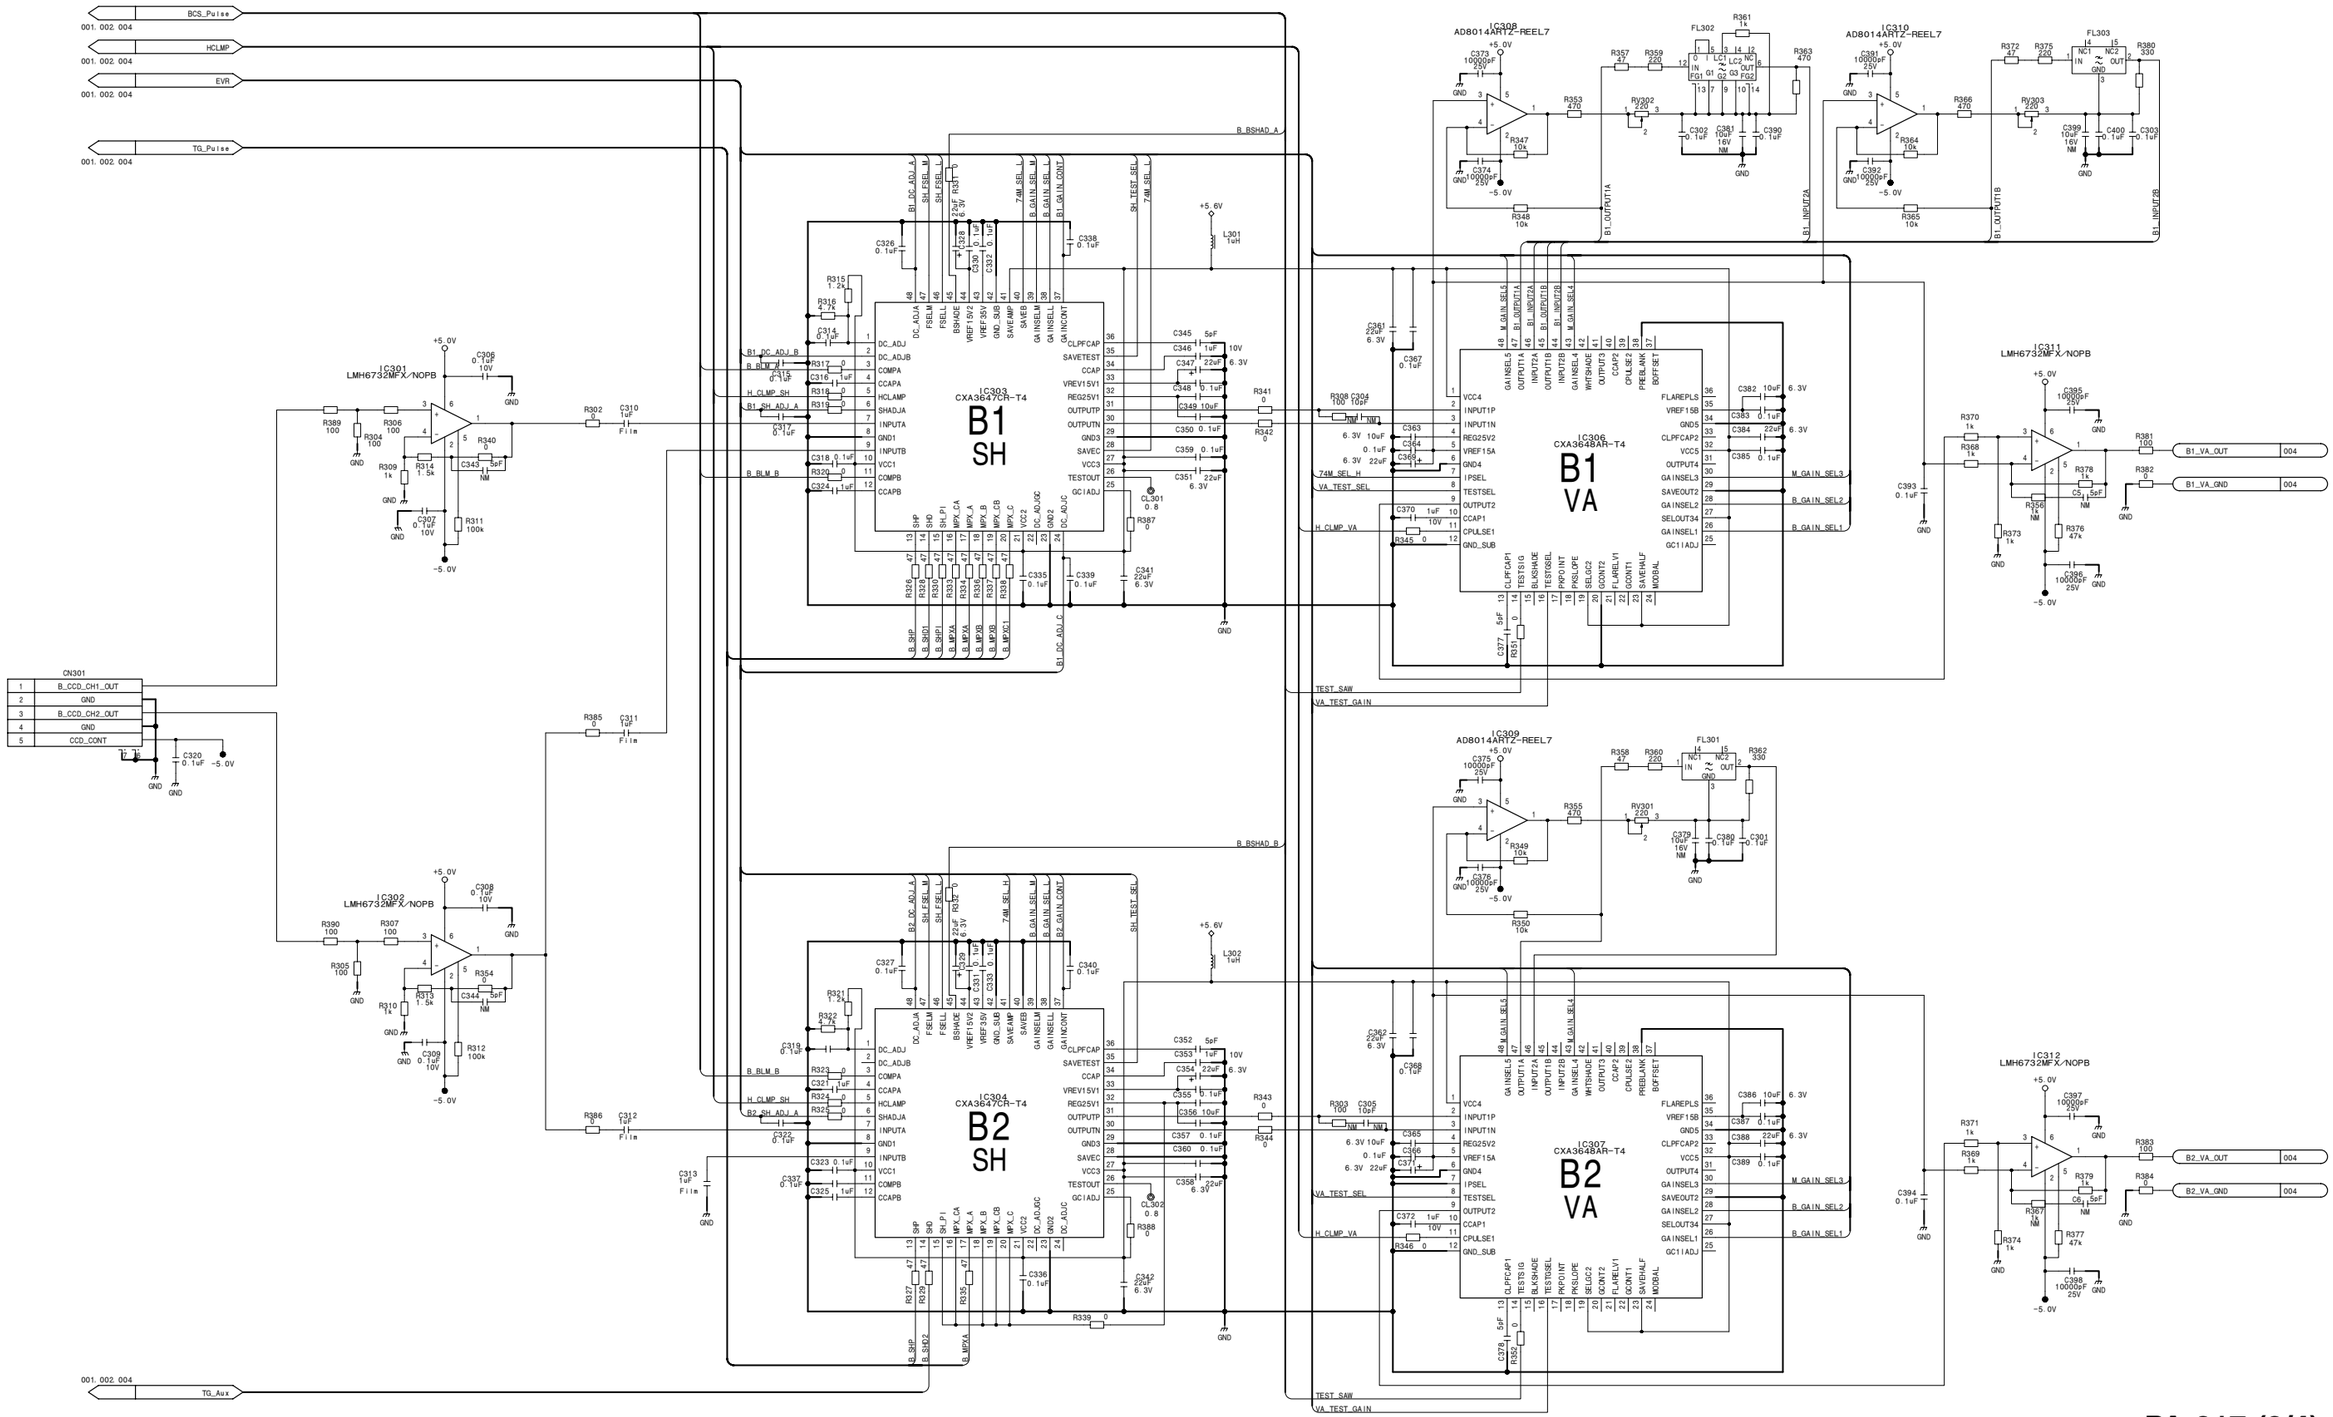SUFFIX: -21, 22

PA-317 (1/4)
SUFFIX: -21, 22

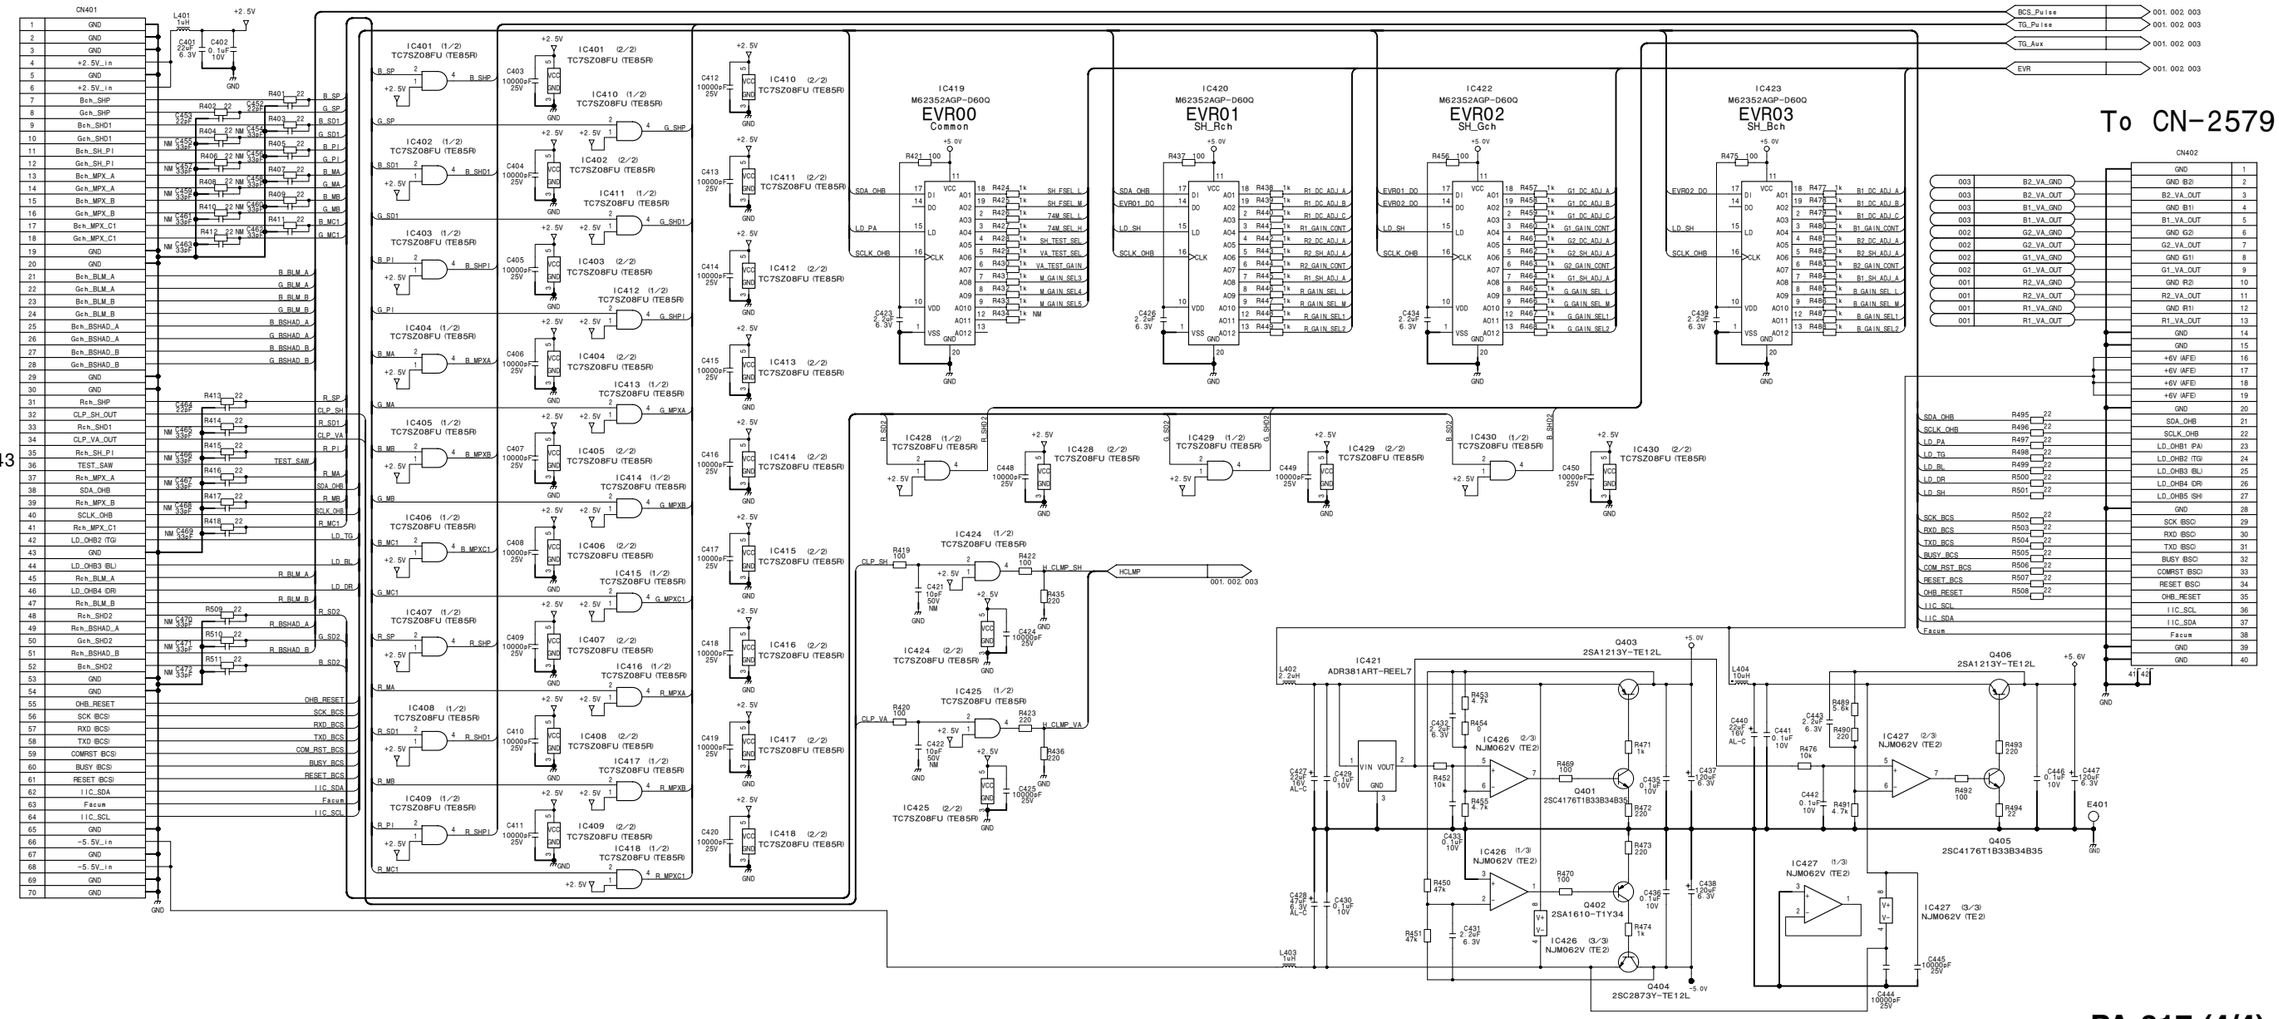


**PA-317 (1/4)**

BOARD NO. 1-865-971-21, 22

HDC-1500_PA-317G_021_1

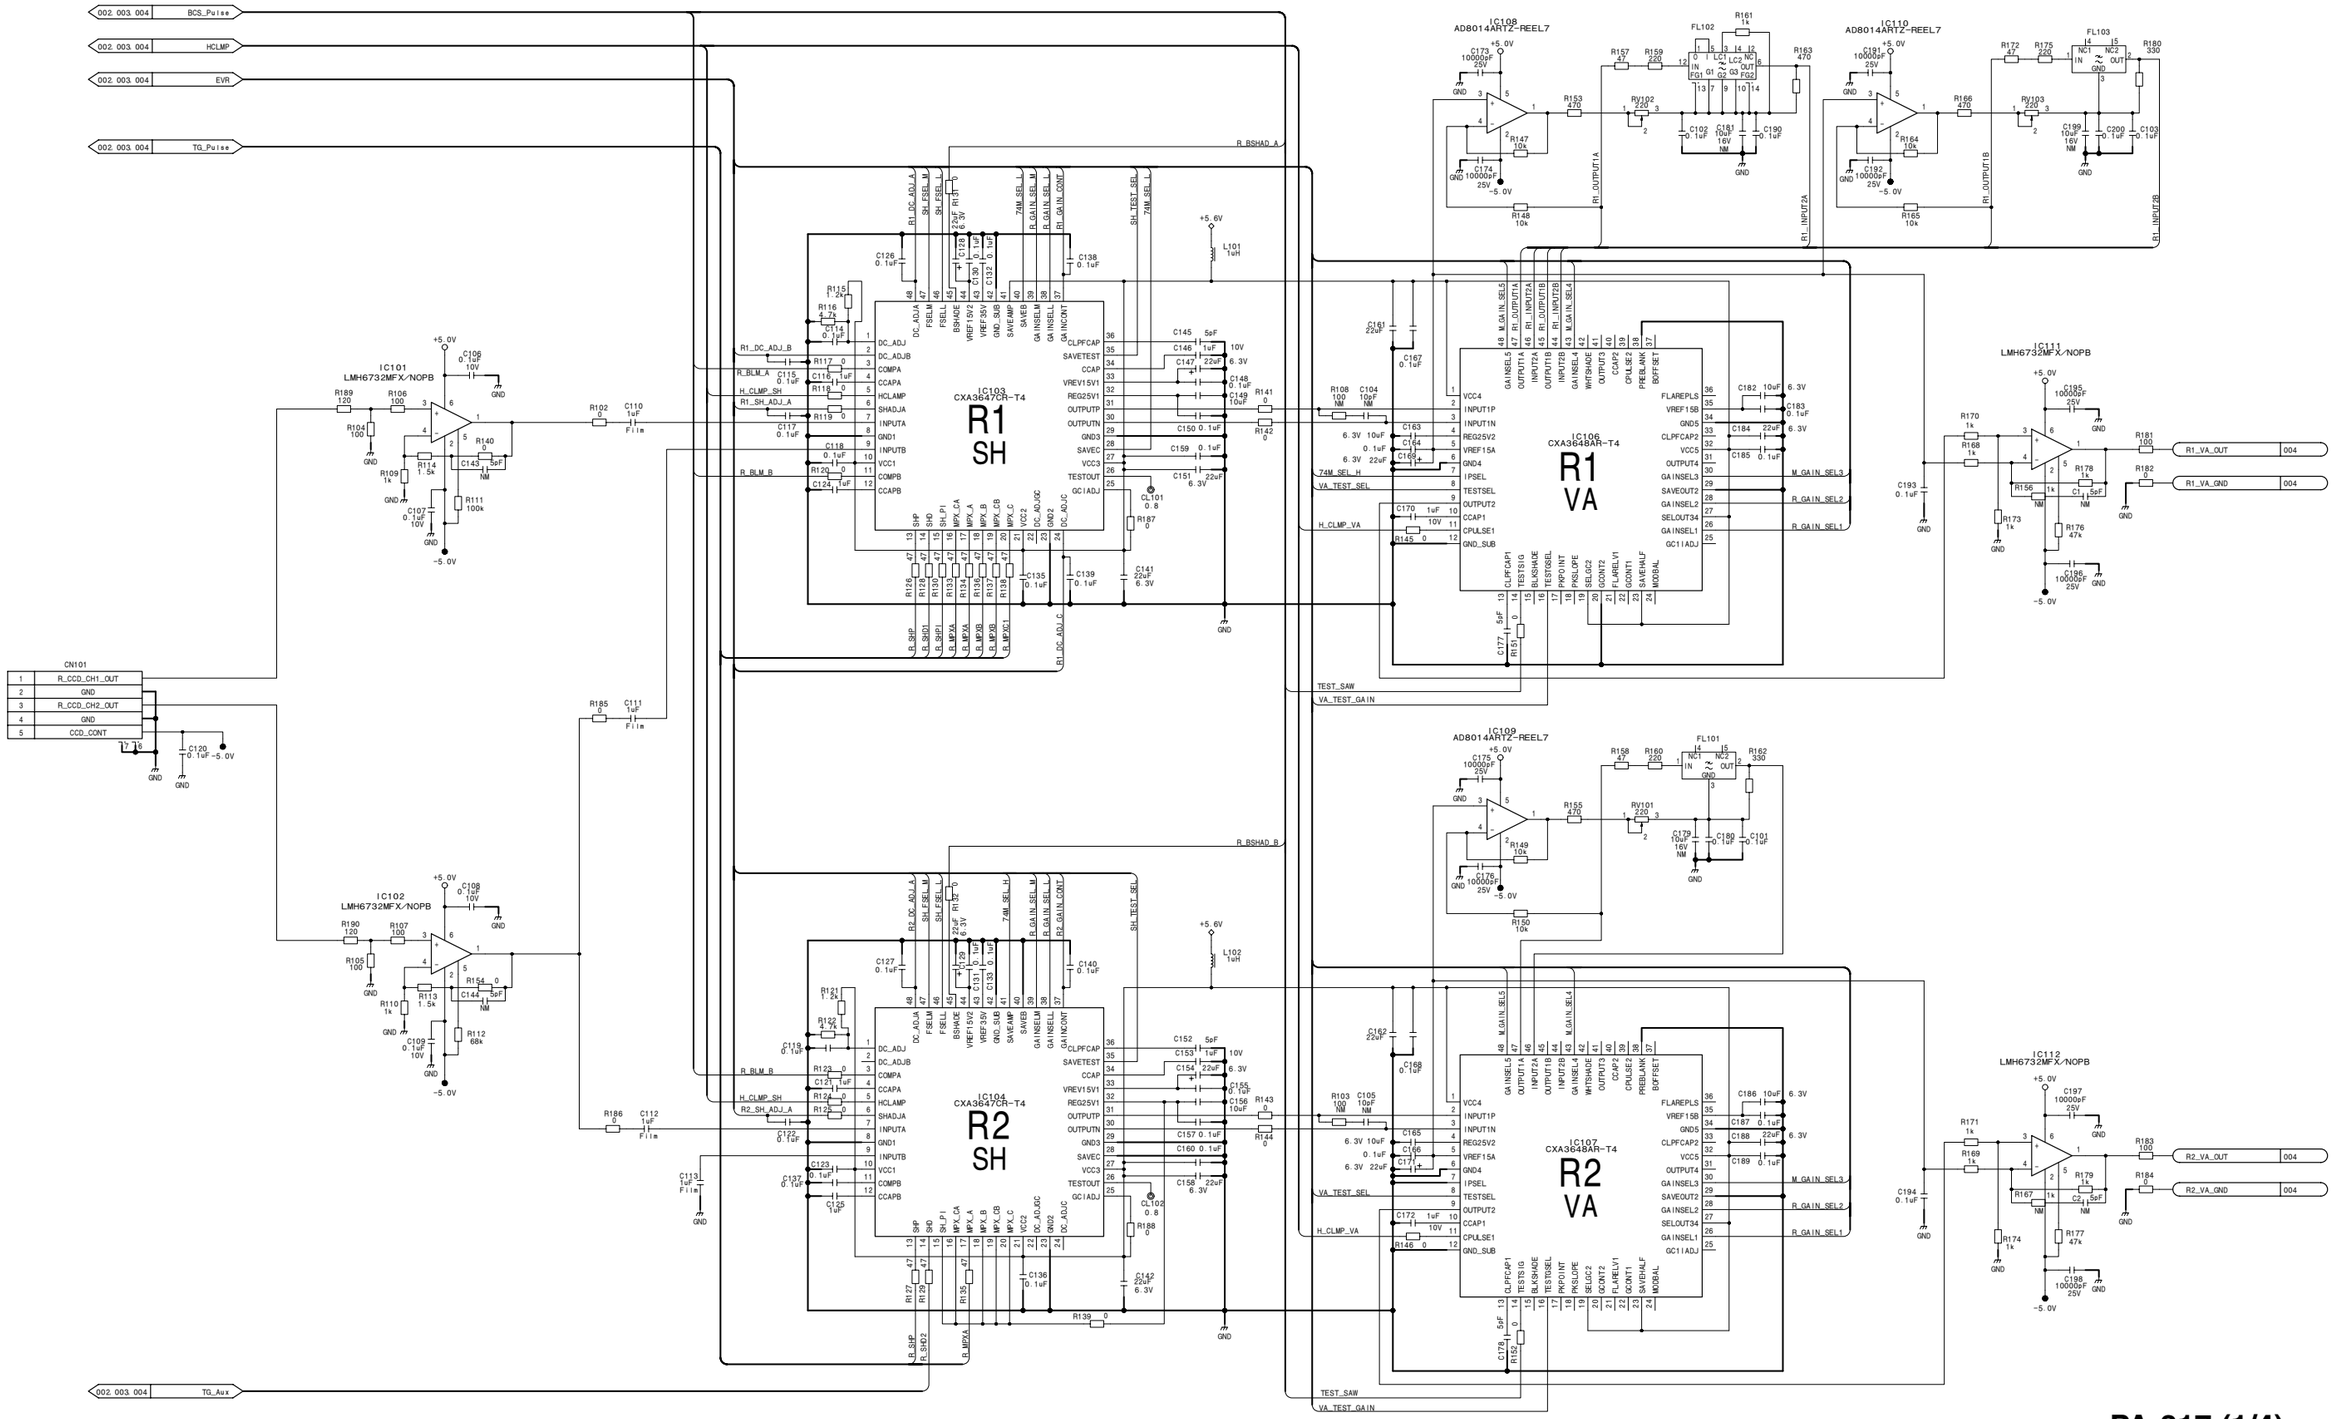


**PA-317 (2/4)**
BOARD NO. 1-865-971-21, 22
HDC-1500_PA-317G_021_2

# PA-317 (3/4)
SUFFIX: -21, 22

PA-317 (3/4)
SUFFIX: -21, 22

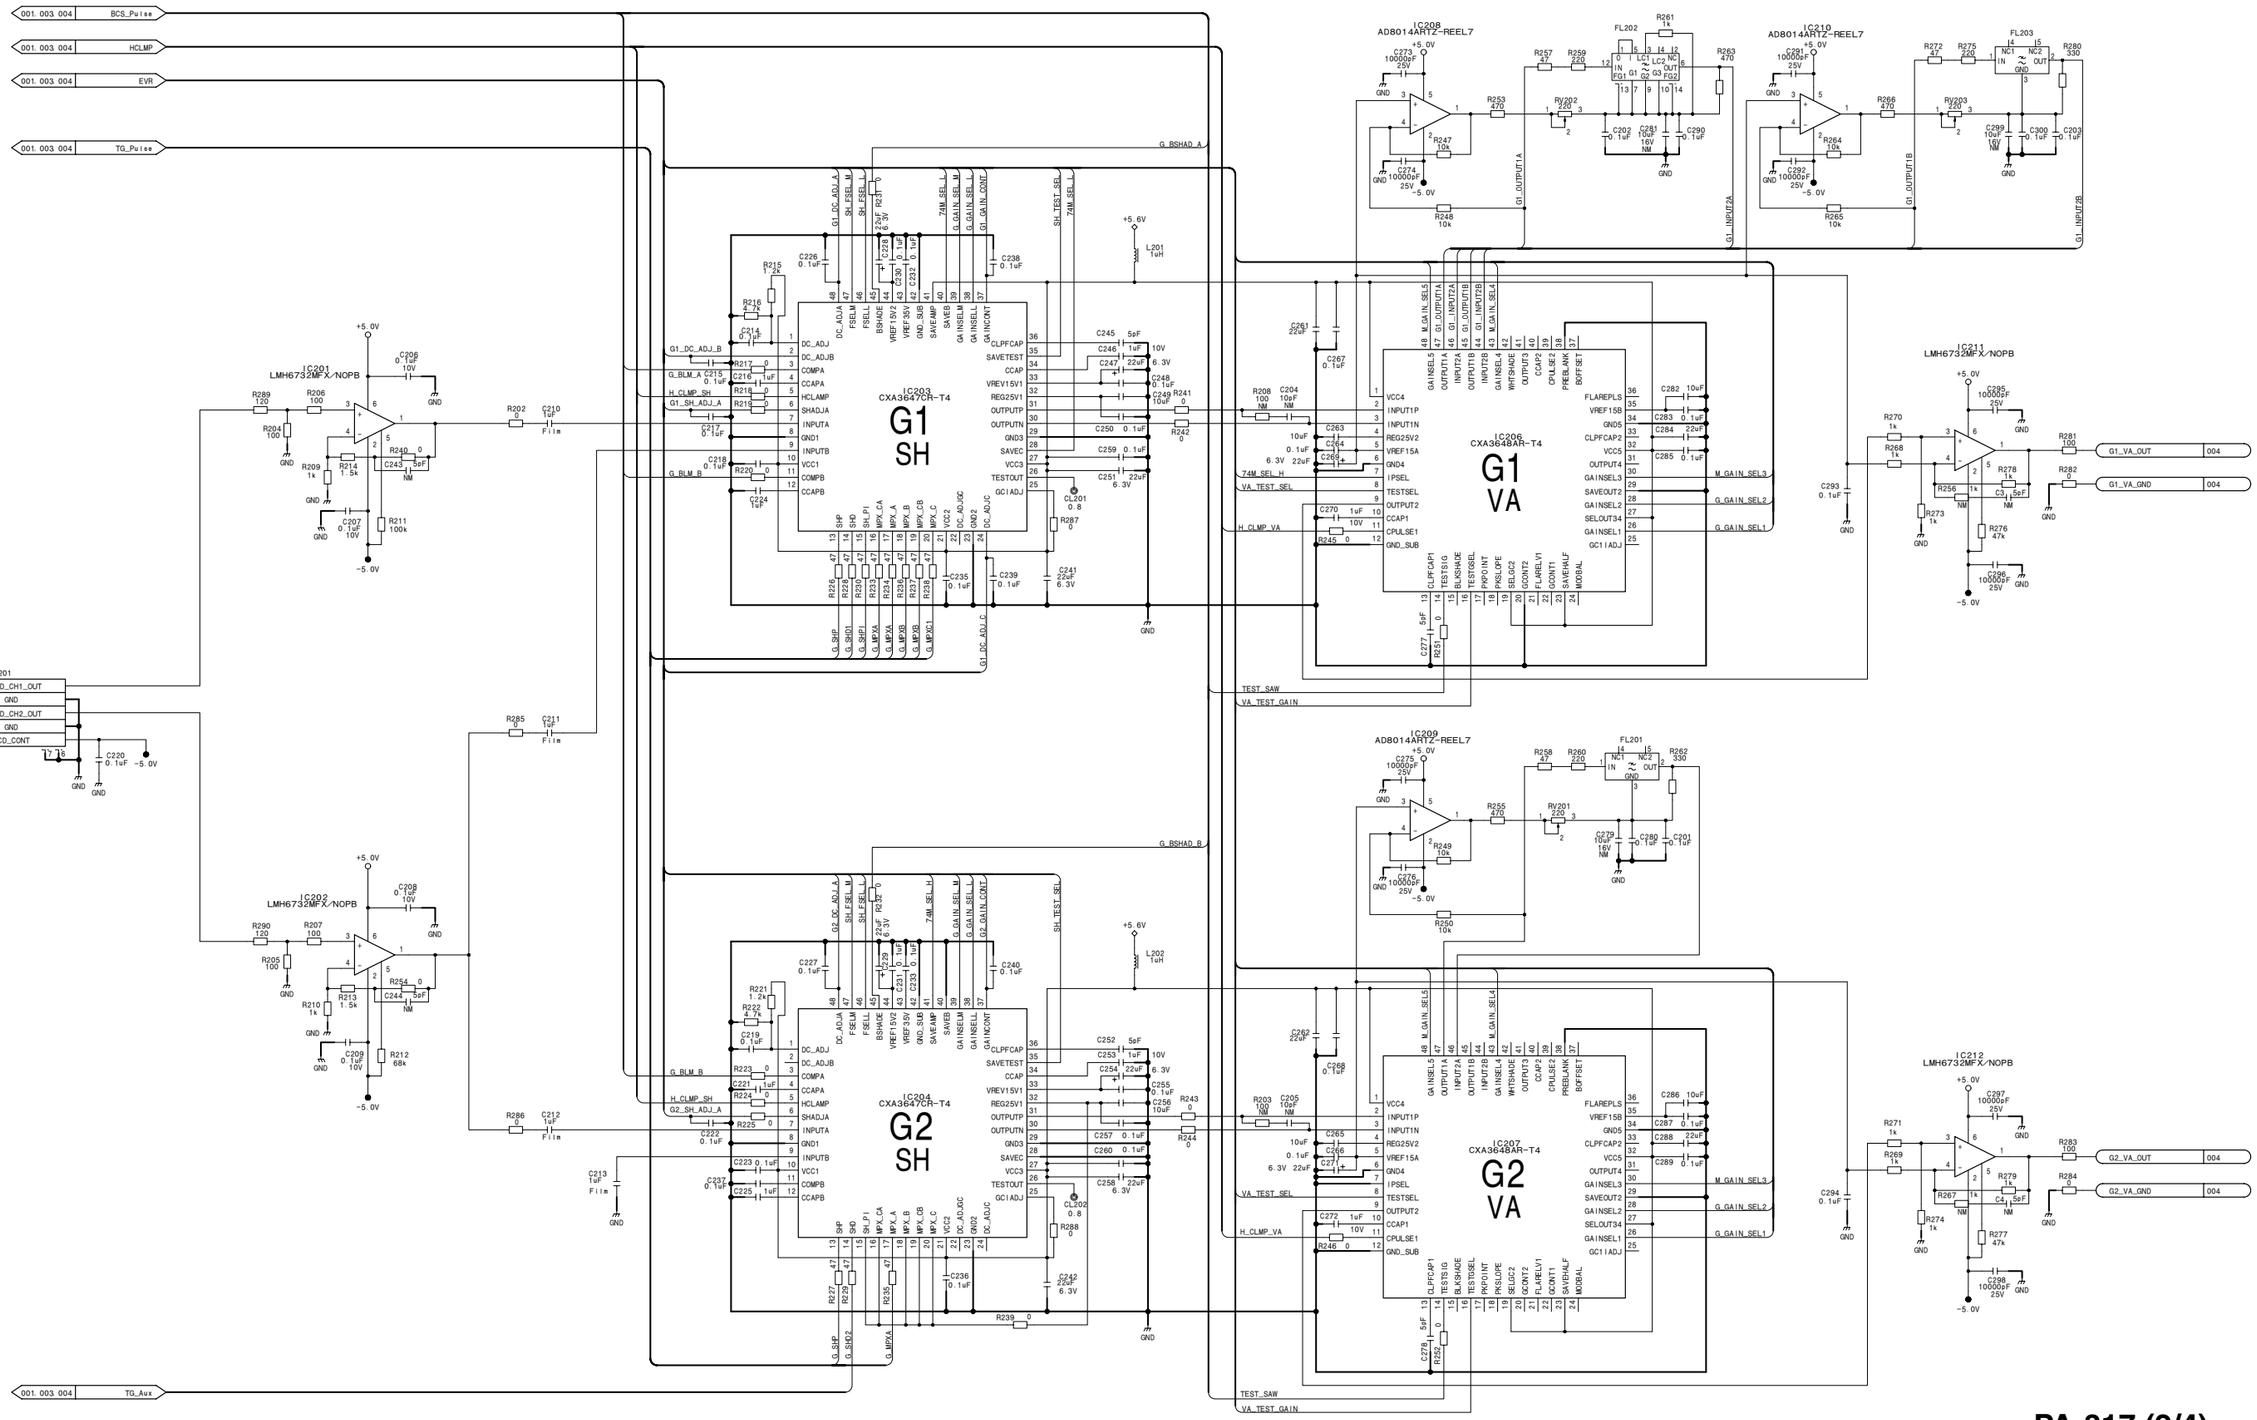


PA-317 (3/4)
BOARD NO. 1-865-971-21, 22
HDC-1500_PA-317G_021_3




**PA-317 (4/4)**
BOARD NO. 1-865-971-21, 22
HDC-1500_PA-317CG_021_4

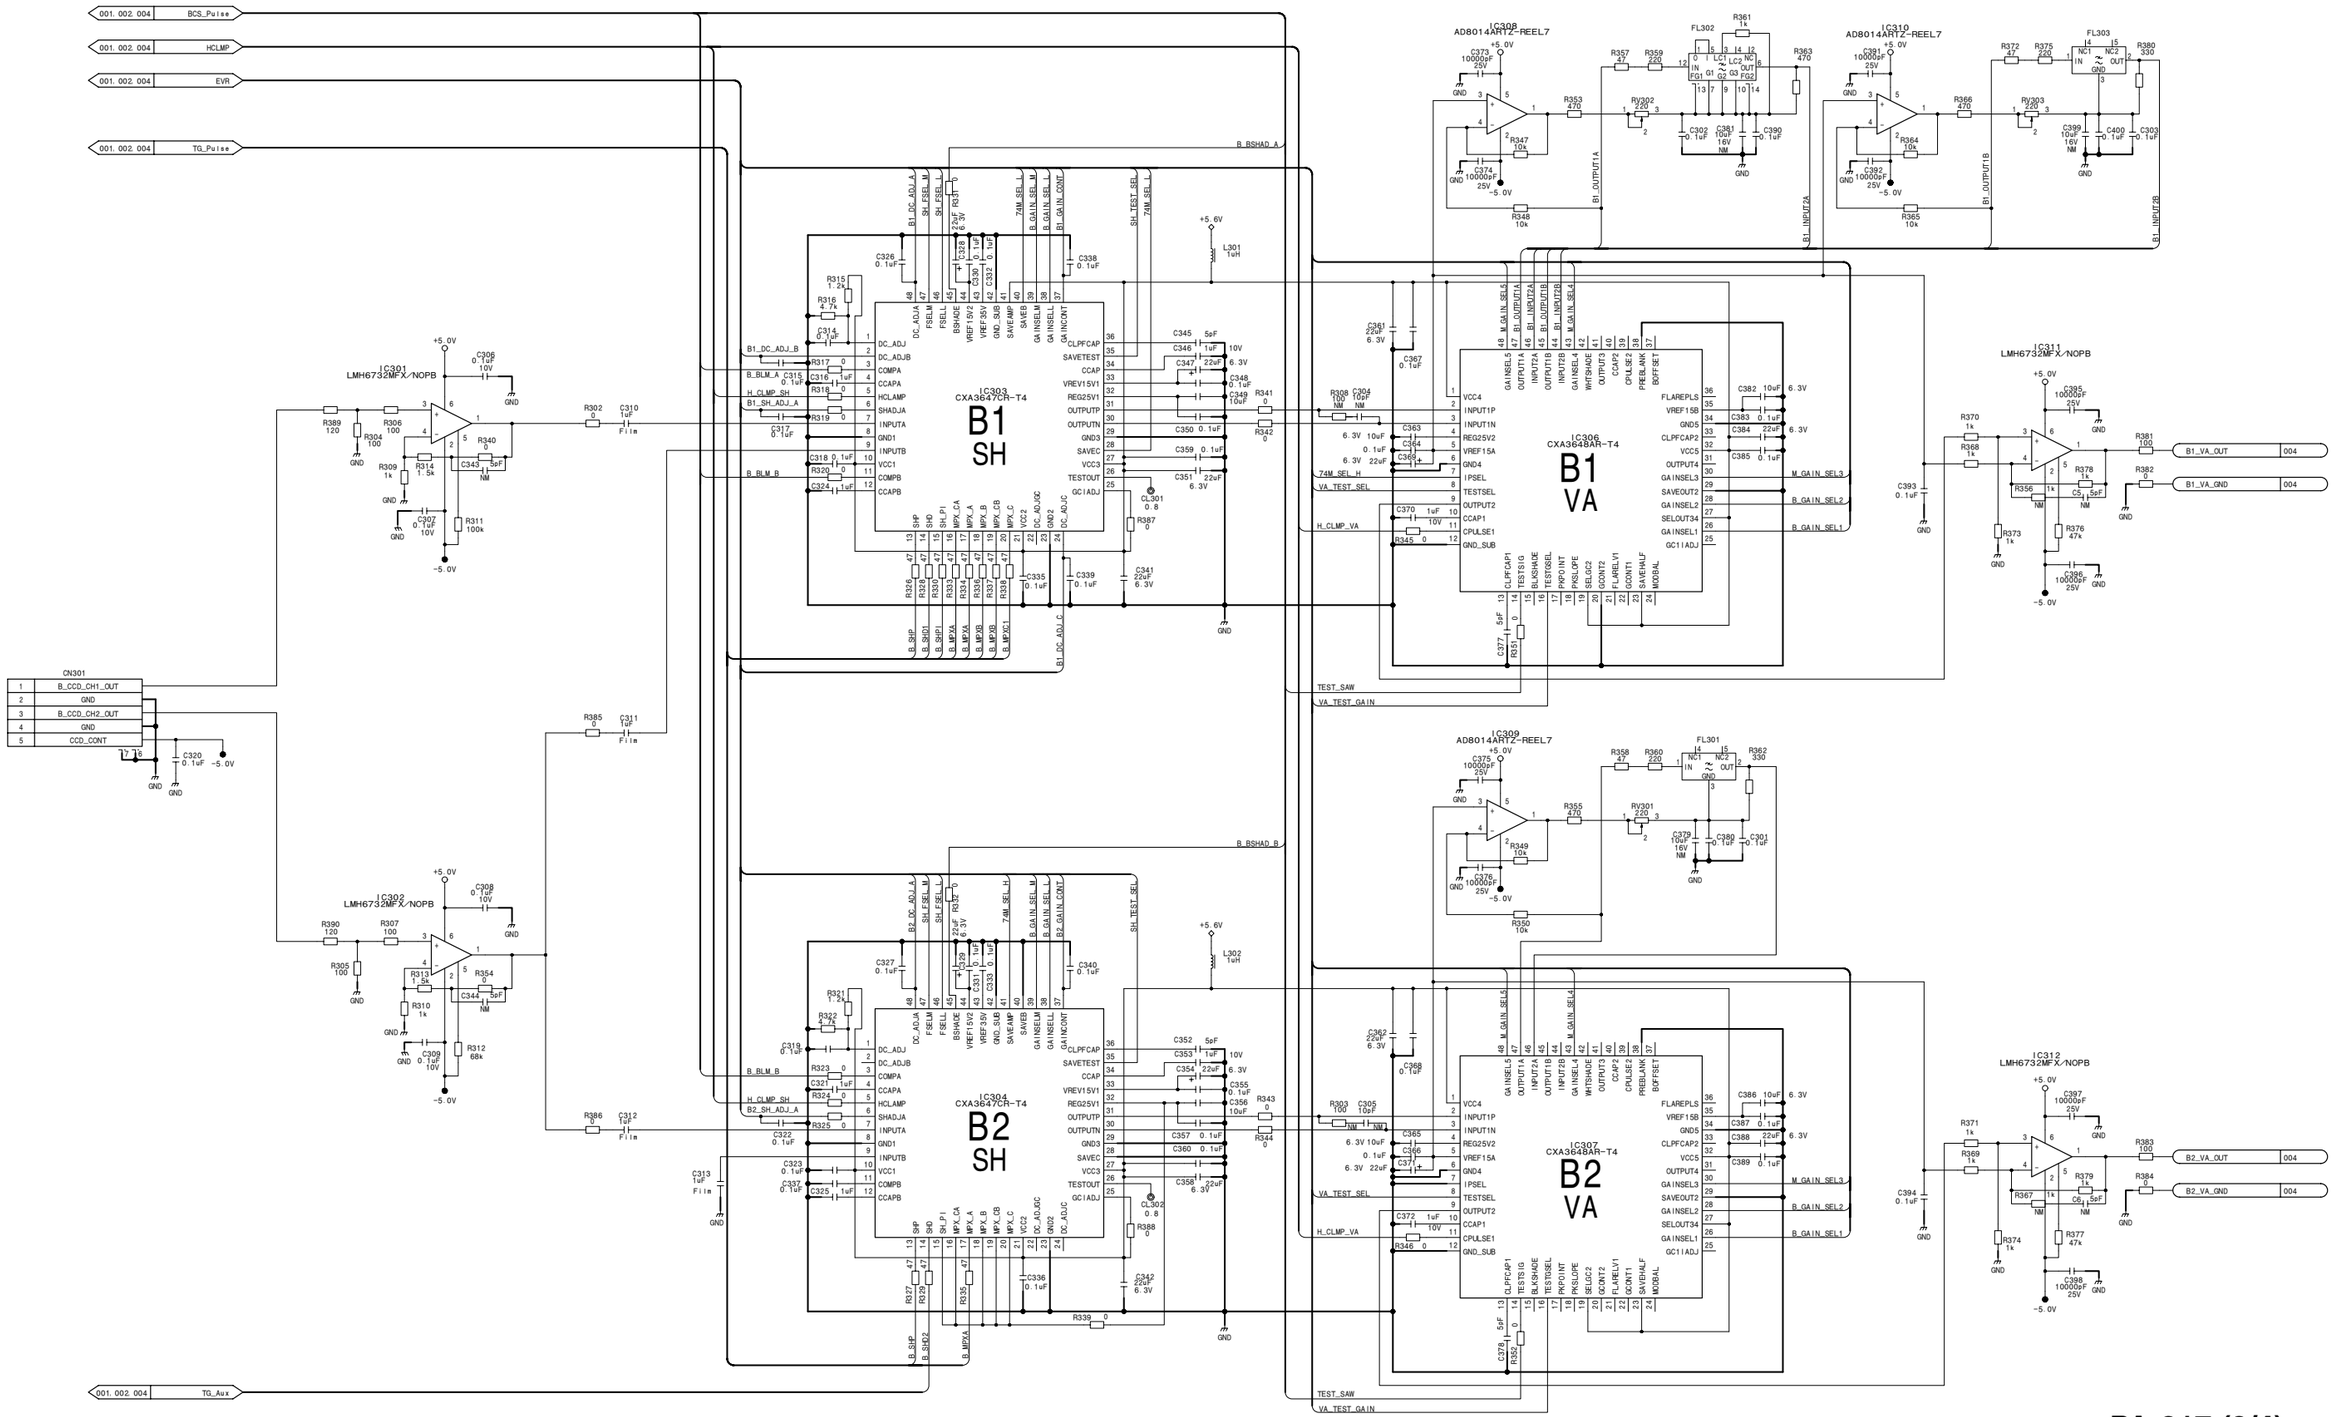


**PA-317C (1/4)**
BOARD NO. 1-865-971-21, 22
HDC-1500_PA-317CG_021_1

**PA-317C (2/4)**
**SUFFIX: -21, 22**

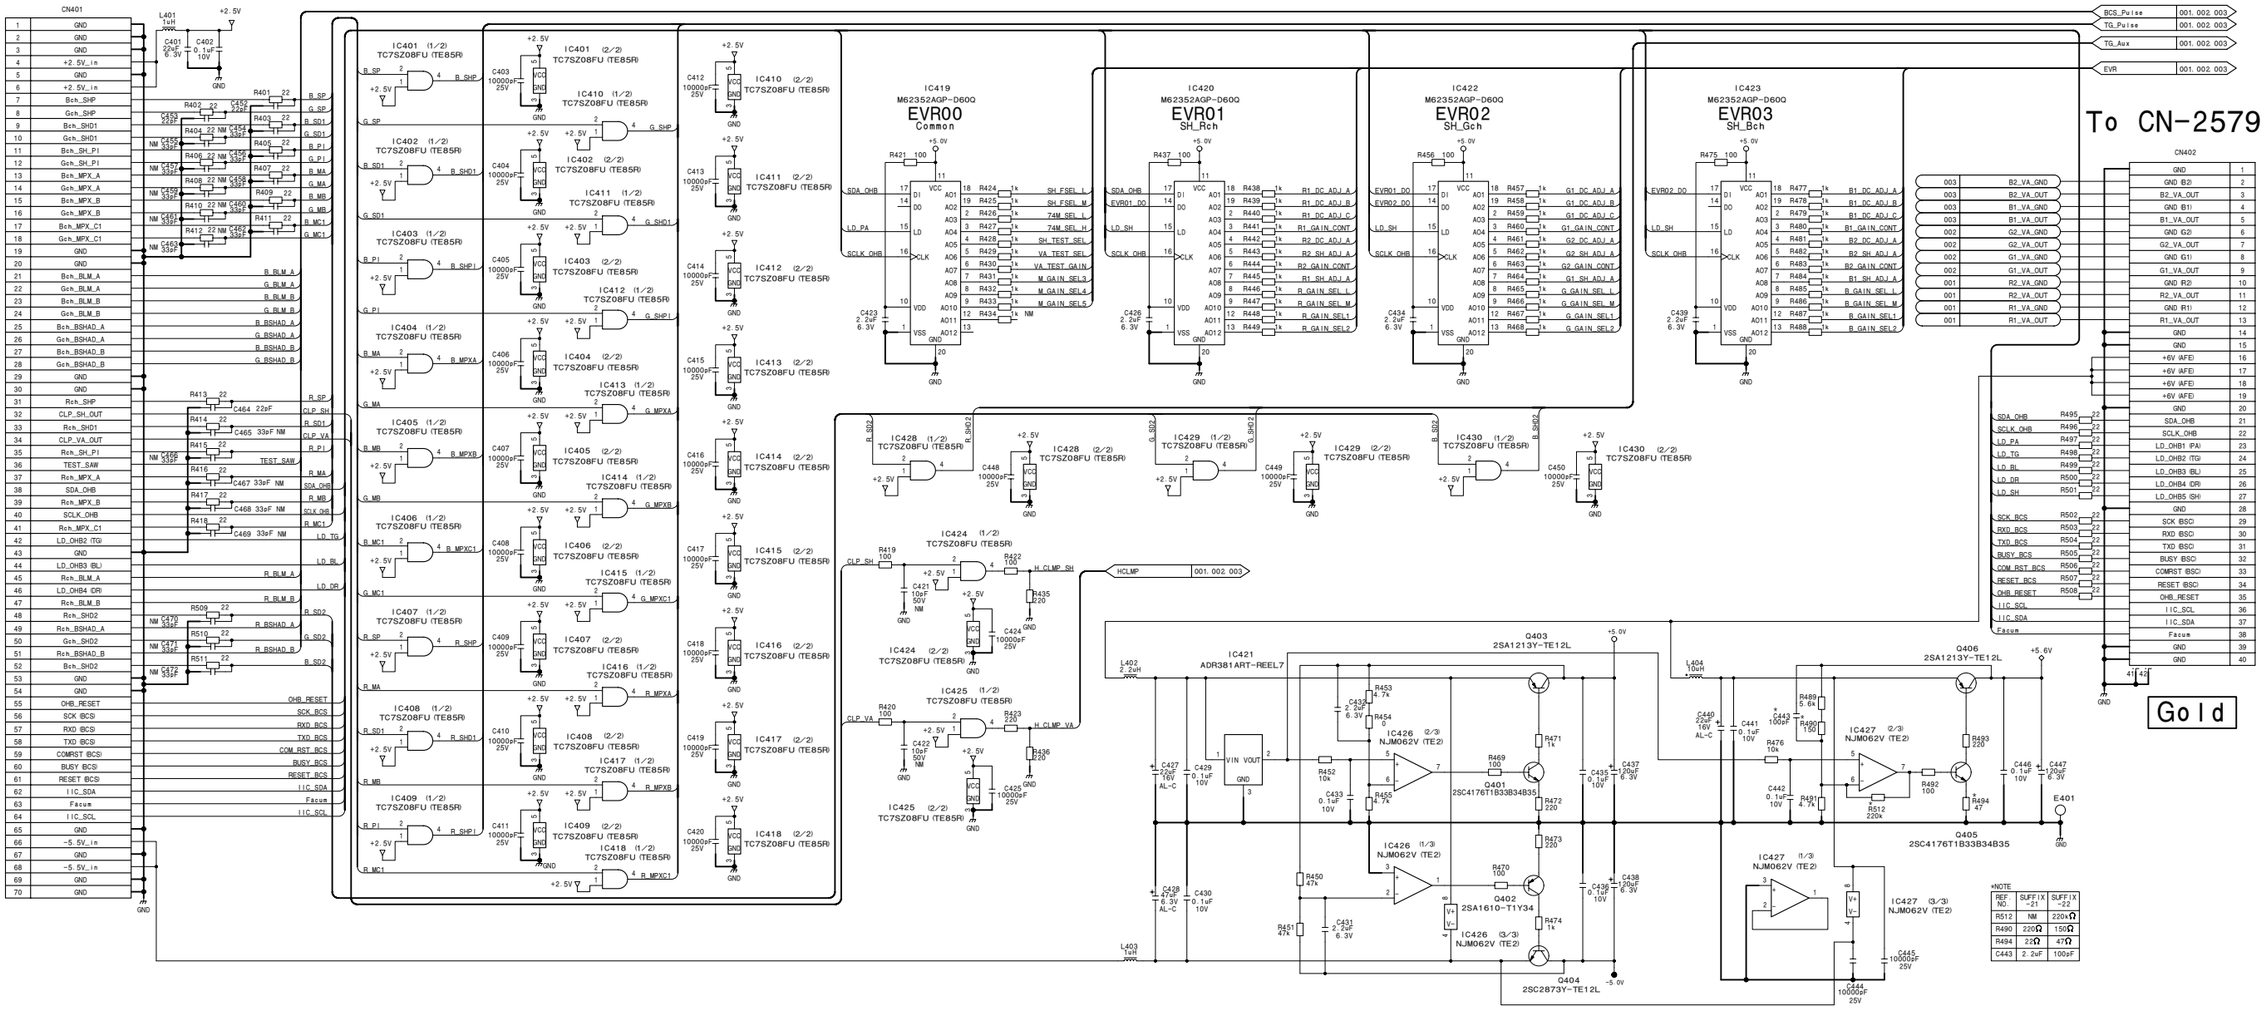


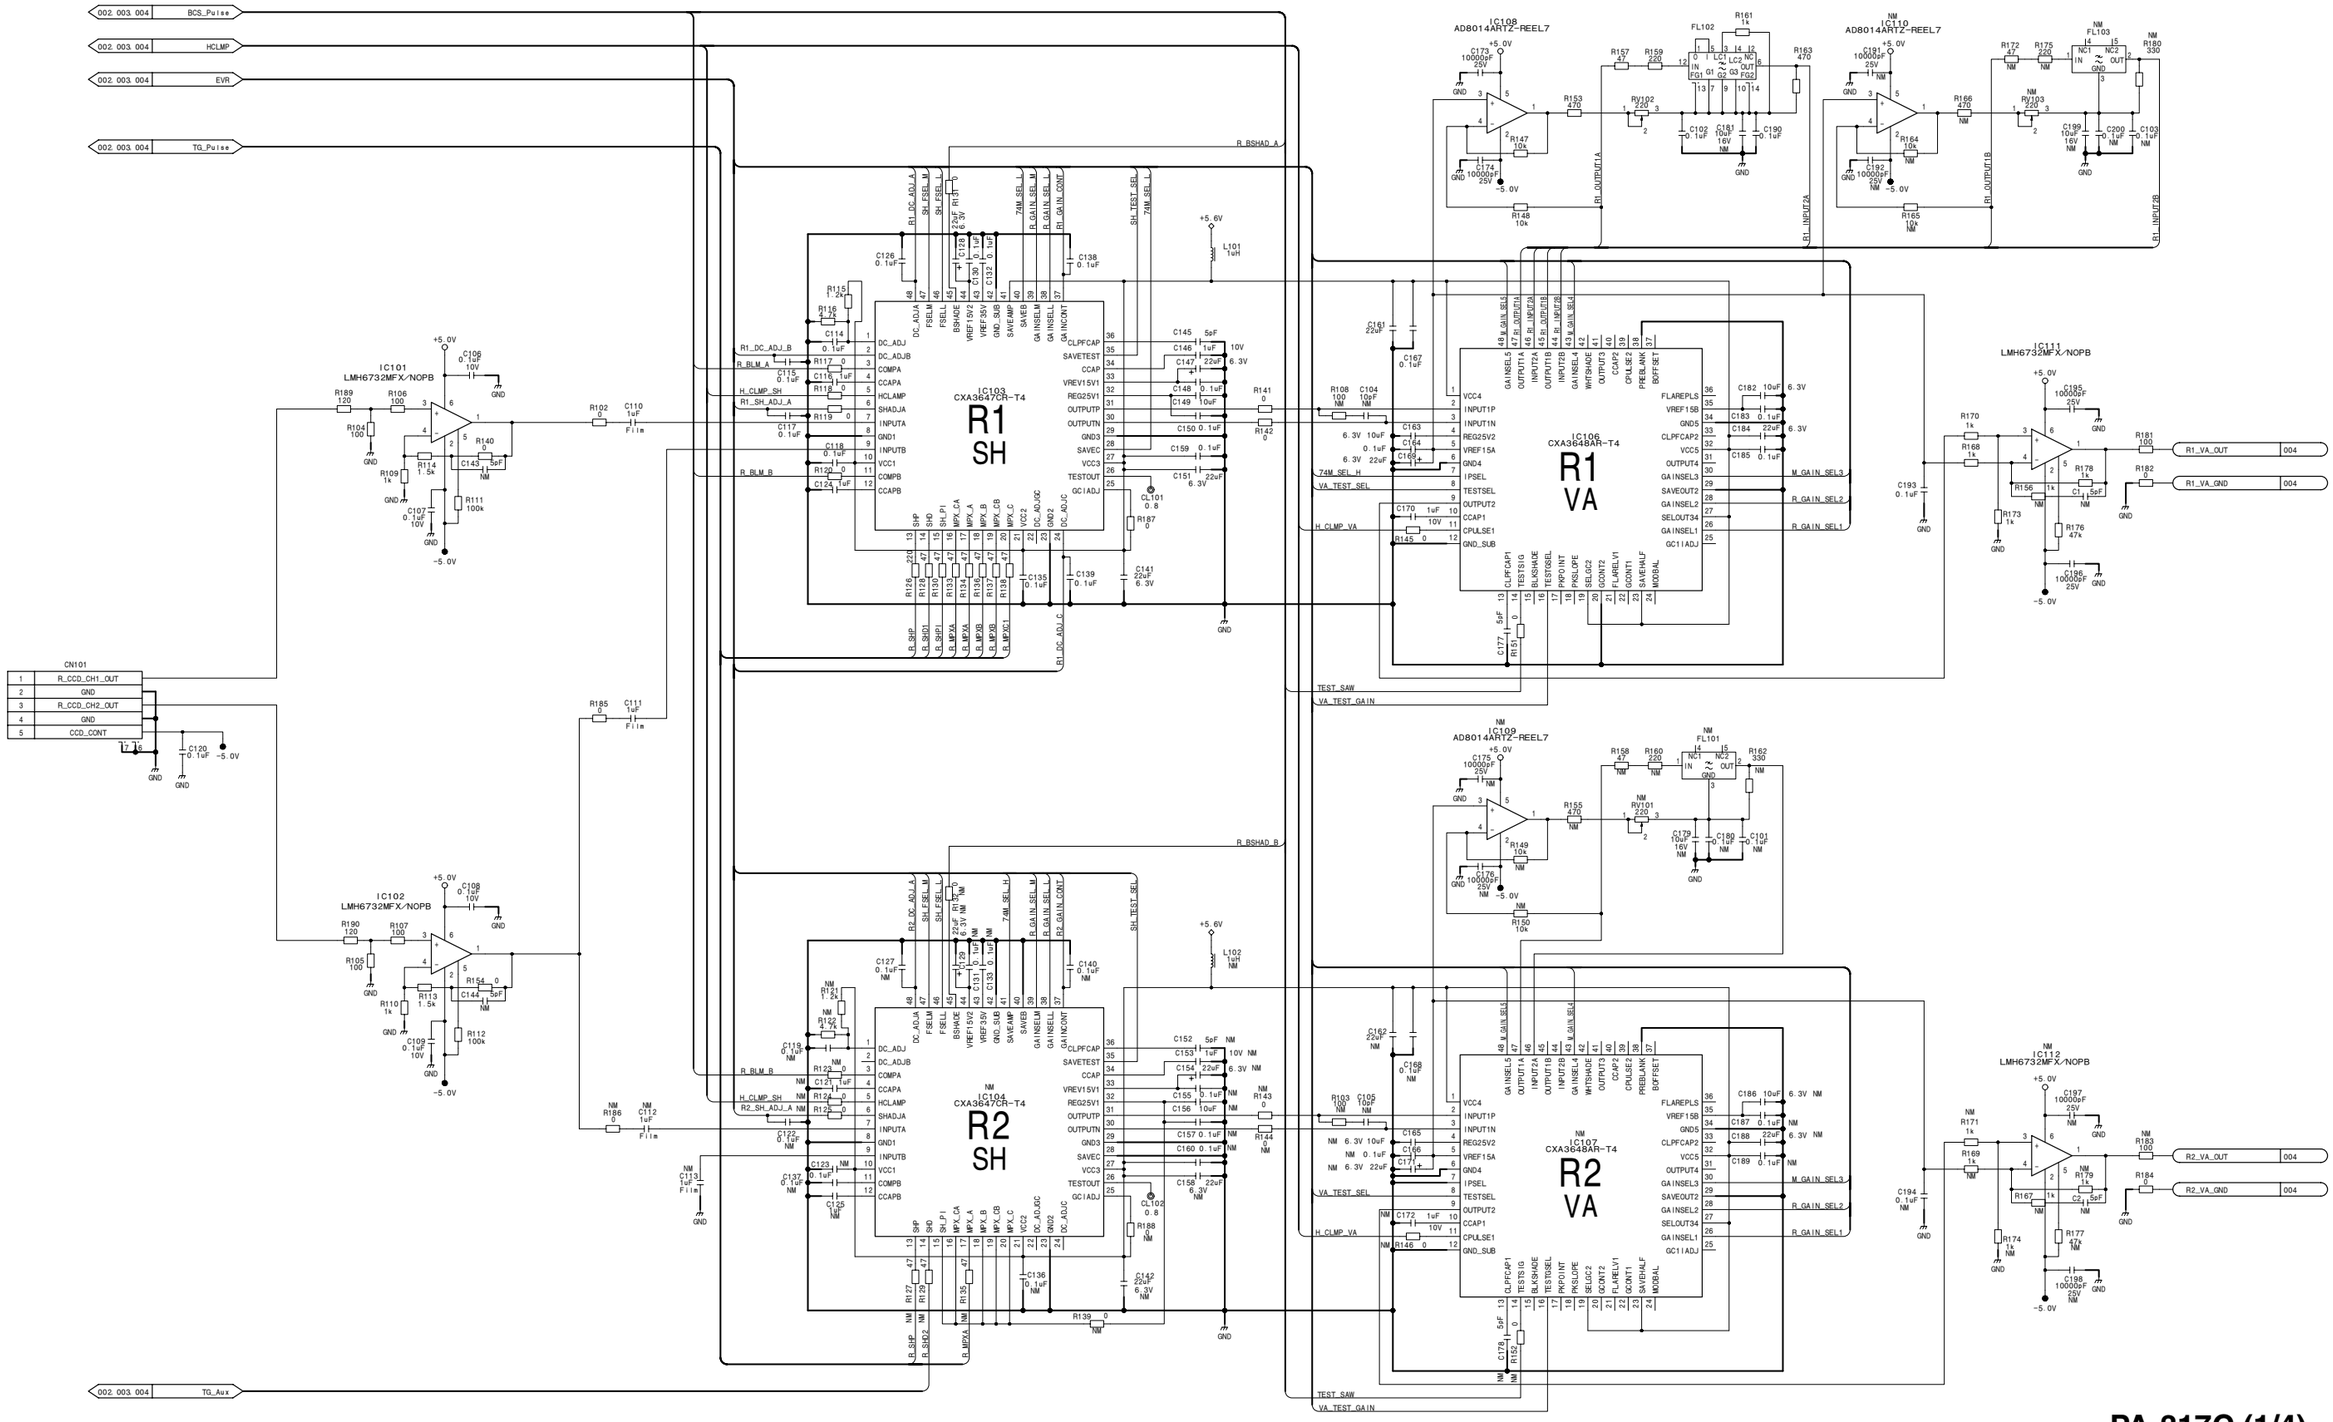

**PA-317C (2/4)**
BOARD NO. 1-865-971-21, 22
HDC-1500_PA-317CG_021_2




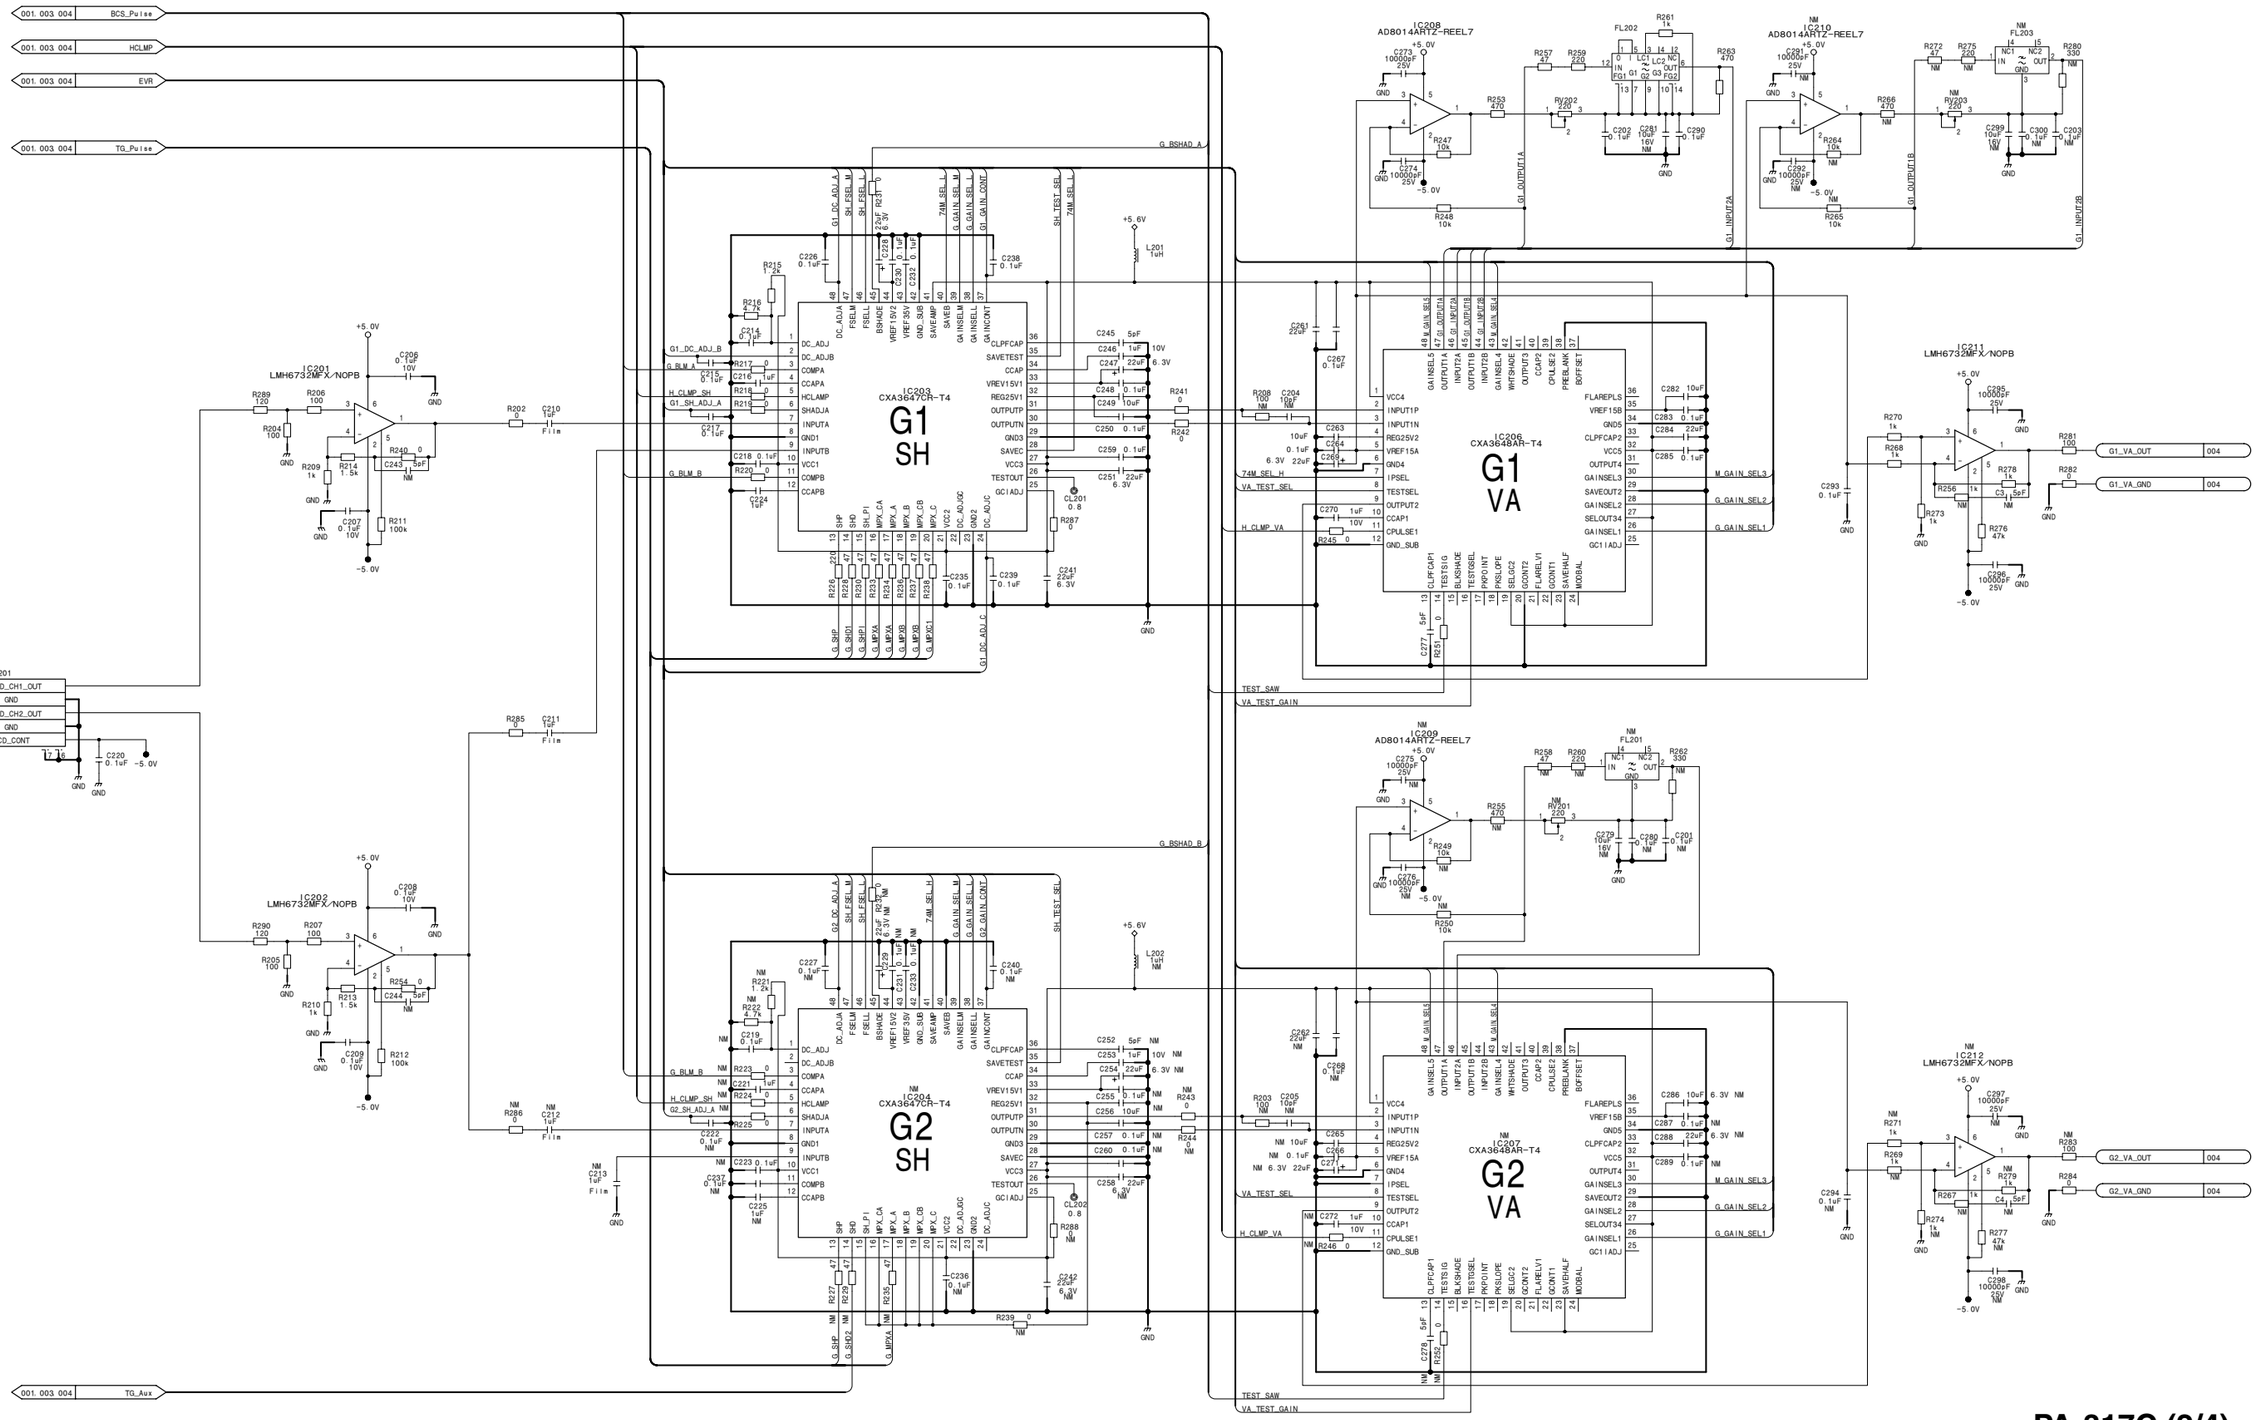

**PA-317C (3/4)**
BOARD NO. 1-865-971-21, 22
HDC-1500_PA-317CG_021_3

**PA-317C (4/4)**
SUFFIX: -21, 22

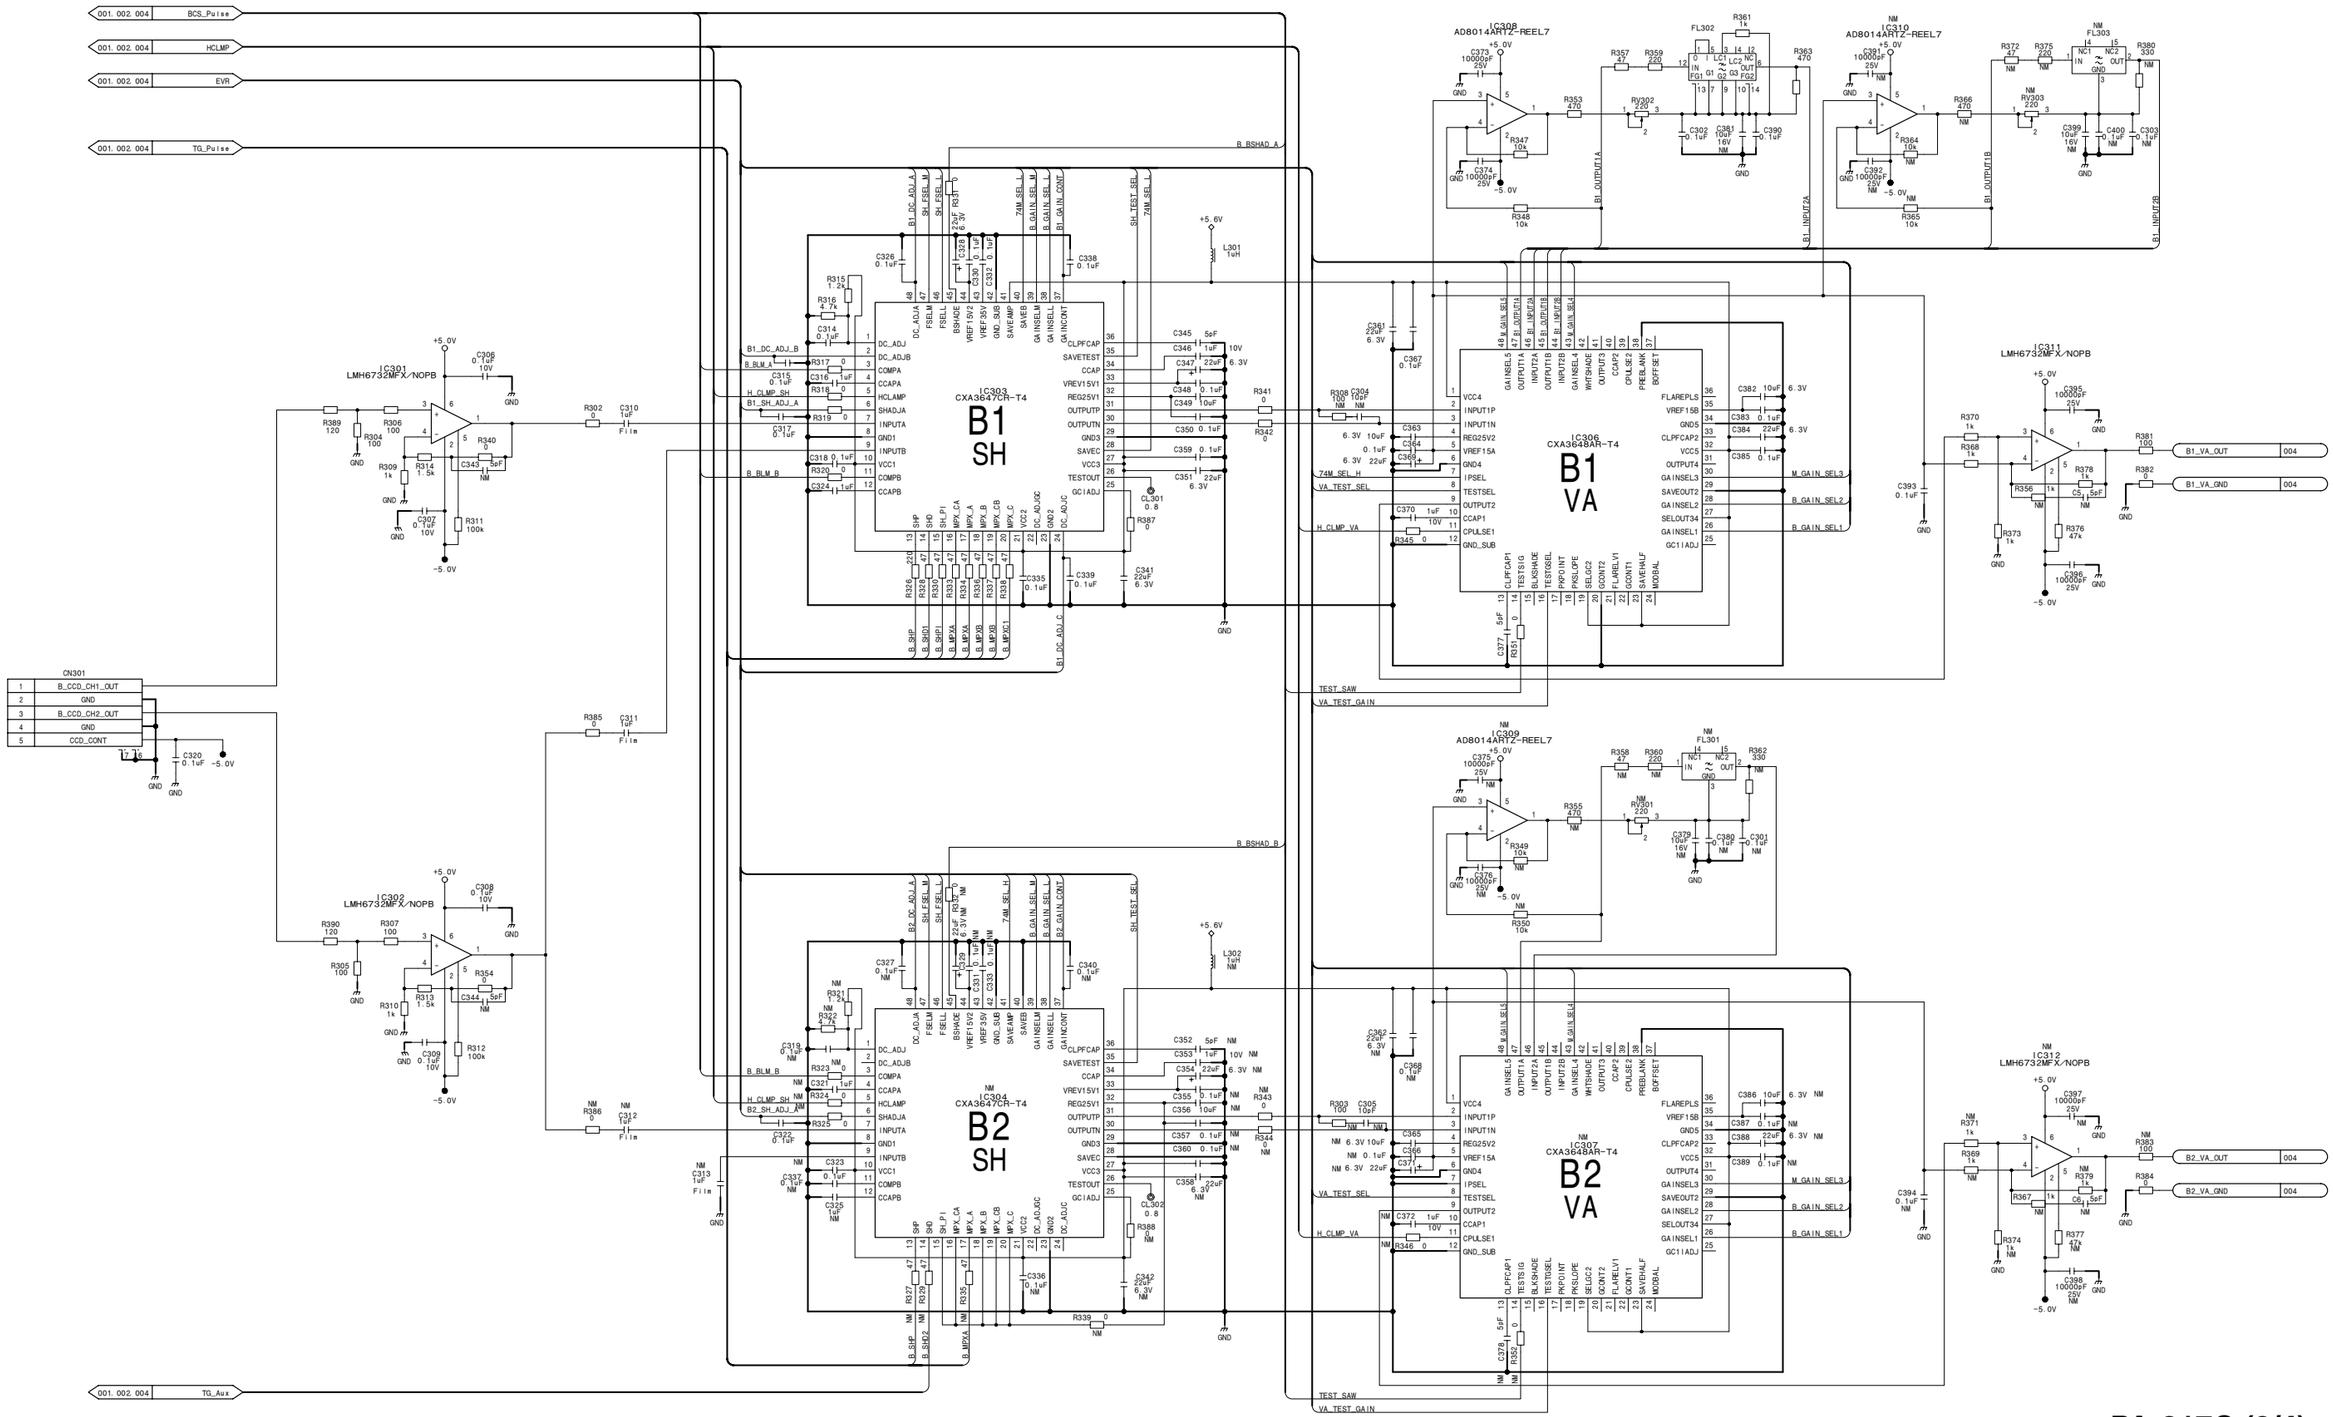


**PA-317C (4/4)**
BOARD NO. 1-865-971-21, 22
HDC-1500_PA-317CG_021_4







**PA-327 (1/4)**
BOARD NO. 1-865-959-11, 21, 22
HDC-1600_PA-327_011_1

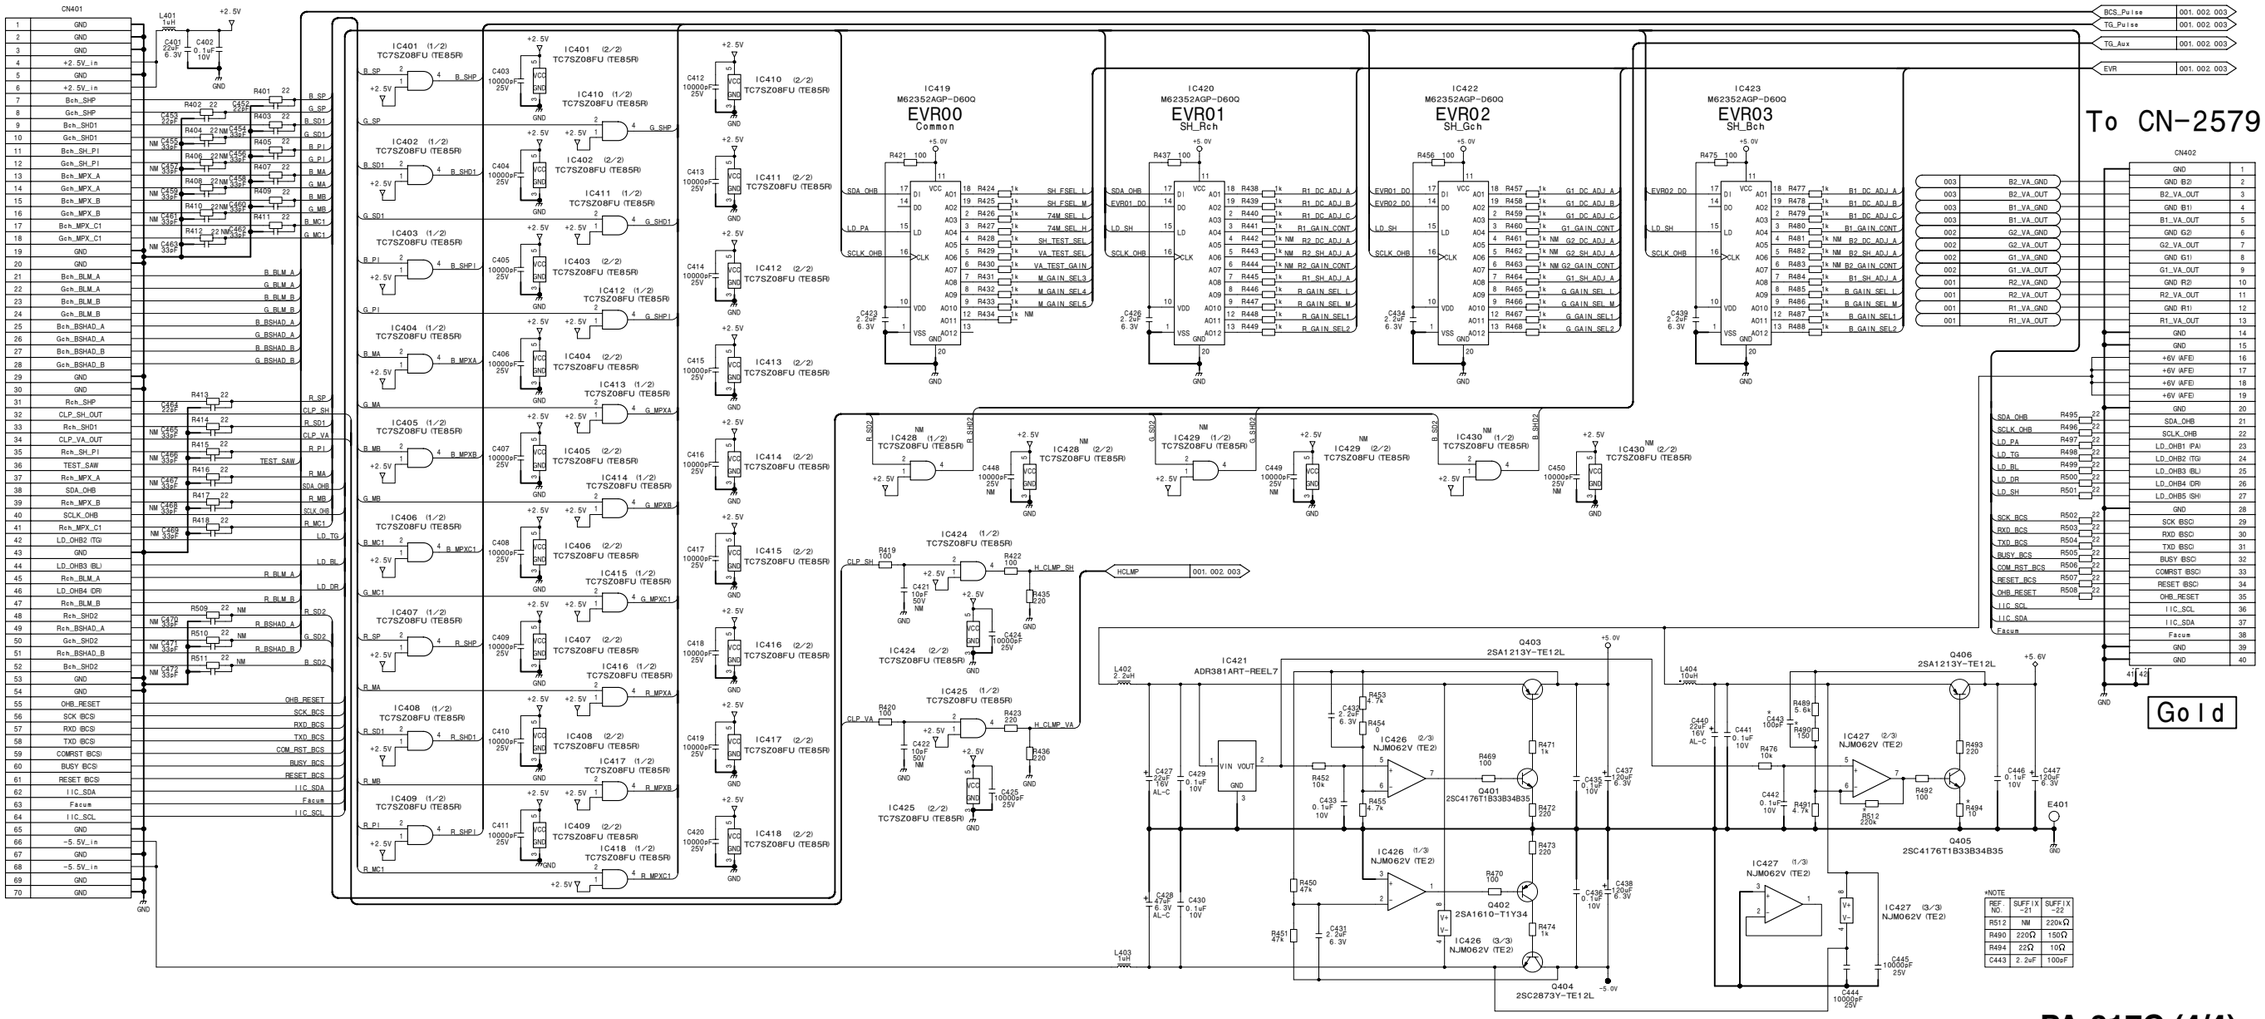**PA-327 (2/4)**
SUFFIX: -11, 21, 22

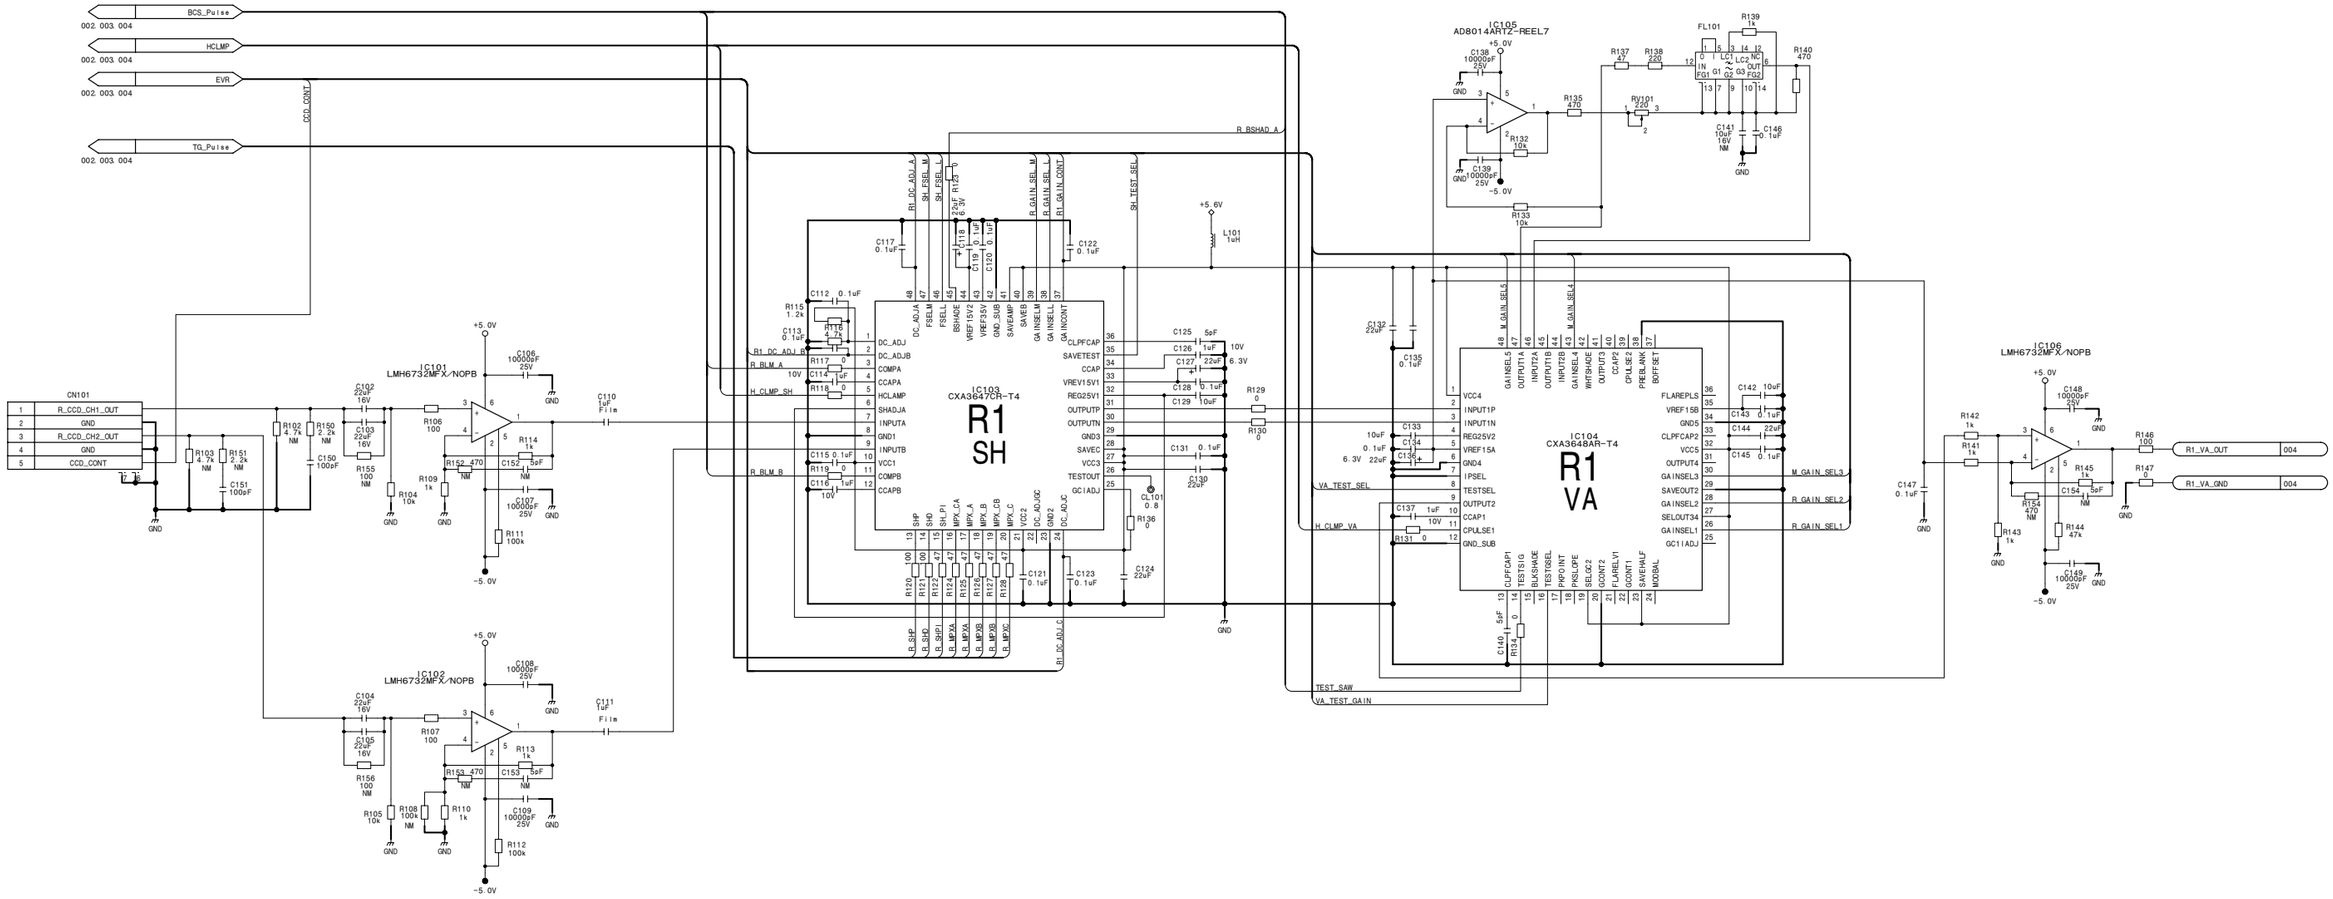



4-92

**PA-327 (2/4)**
BOARD NO. 1-865-959-11, 21, 22
HDC-1600_PA-327_011_2




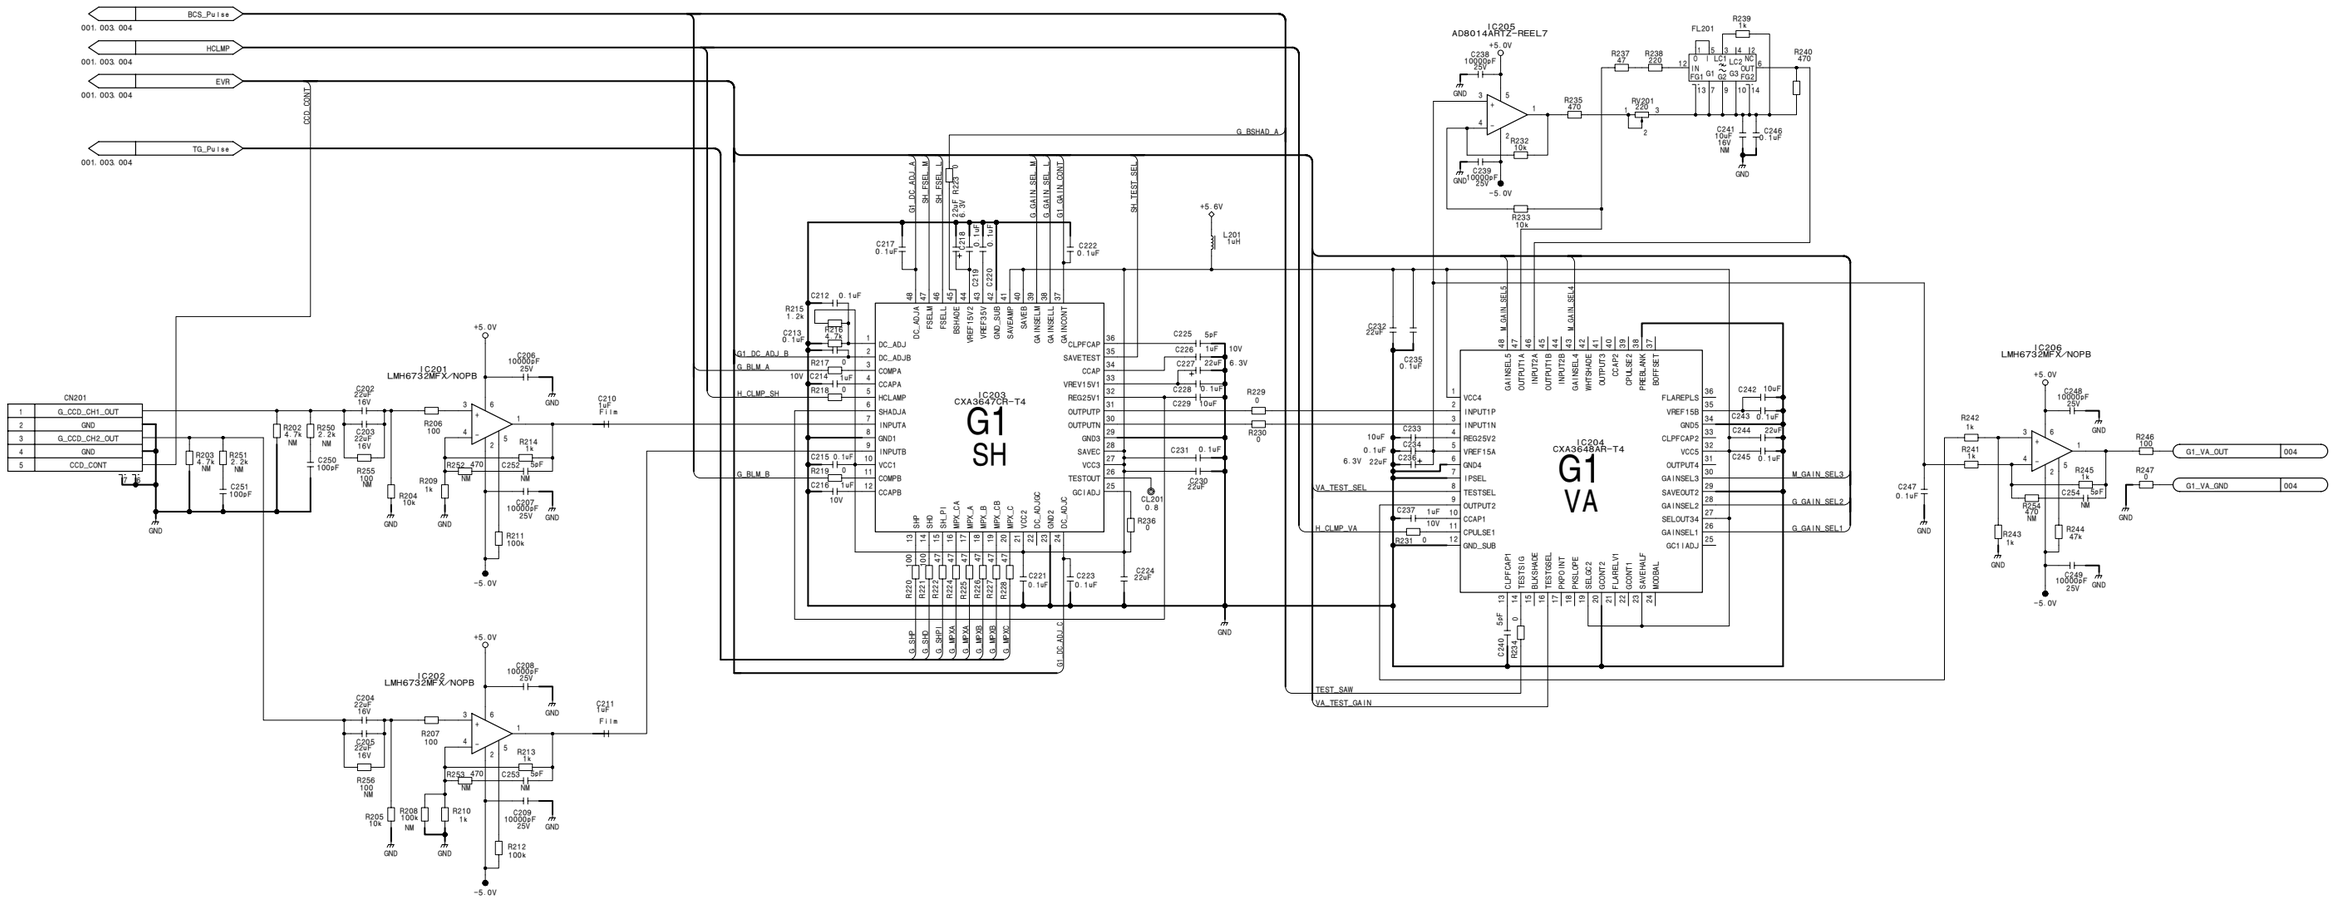

**PA-327 (3/4)**
BOARD NO. 1-865-959-11, 21, 22
HDC-1600_PA-327_011_3

**PA-327 (4/4)**
SUFFIX: -11, 21, 22




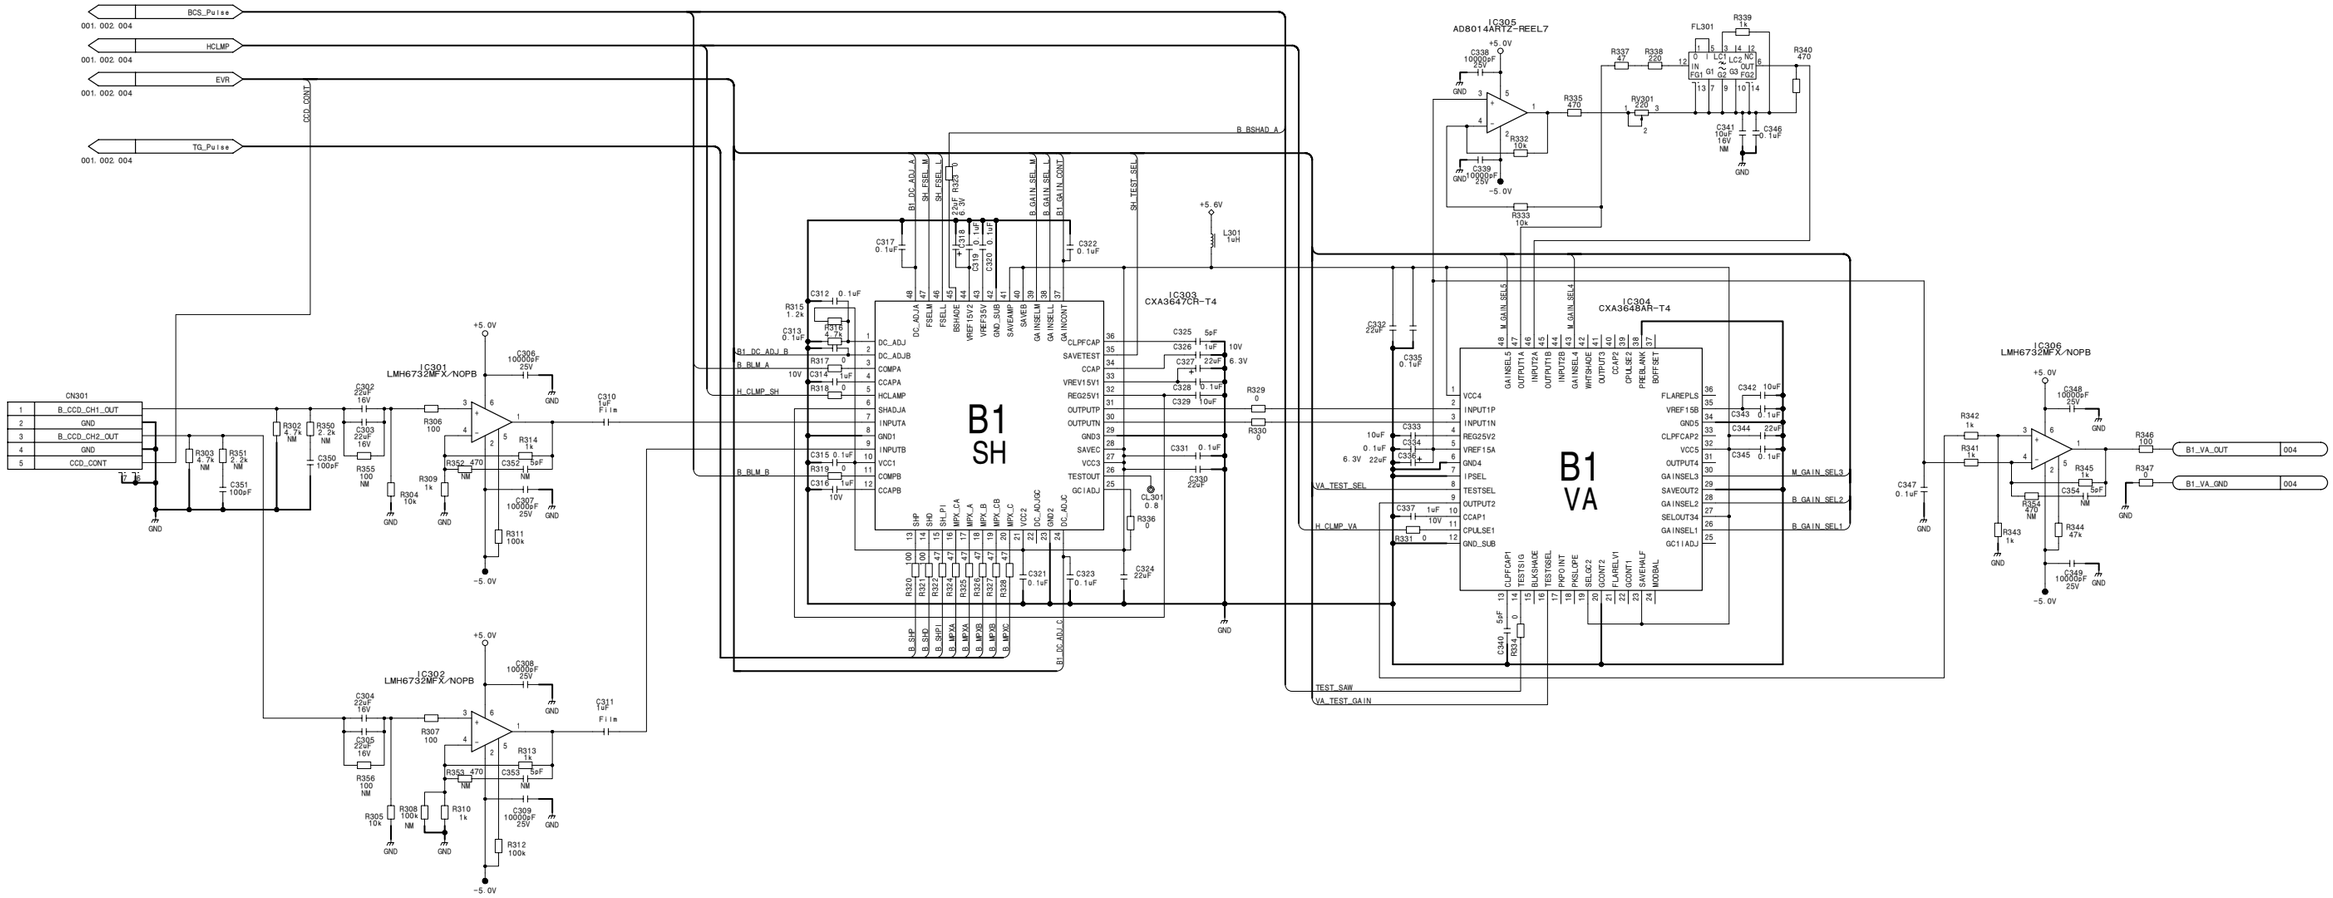

4-94



**PA-327 (4/4)**
BOARD NO. 1-865-959-11, 21, 22
HDC-1600_PA-327_011_4
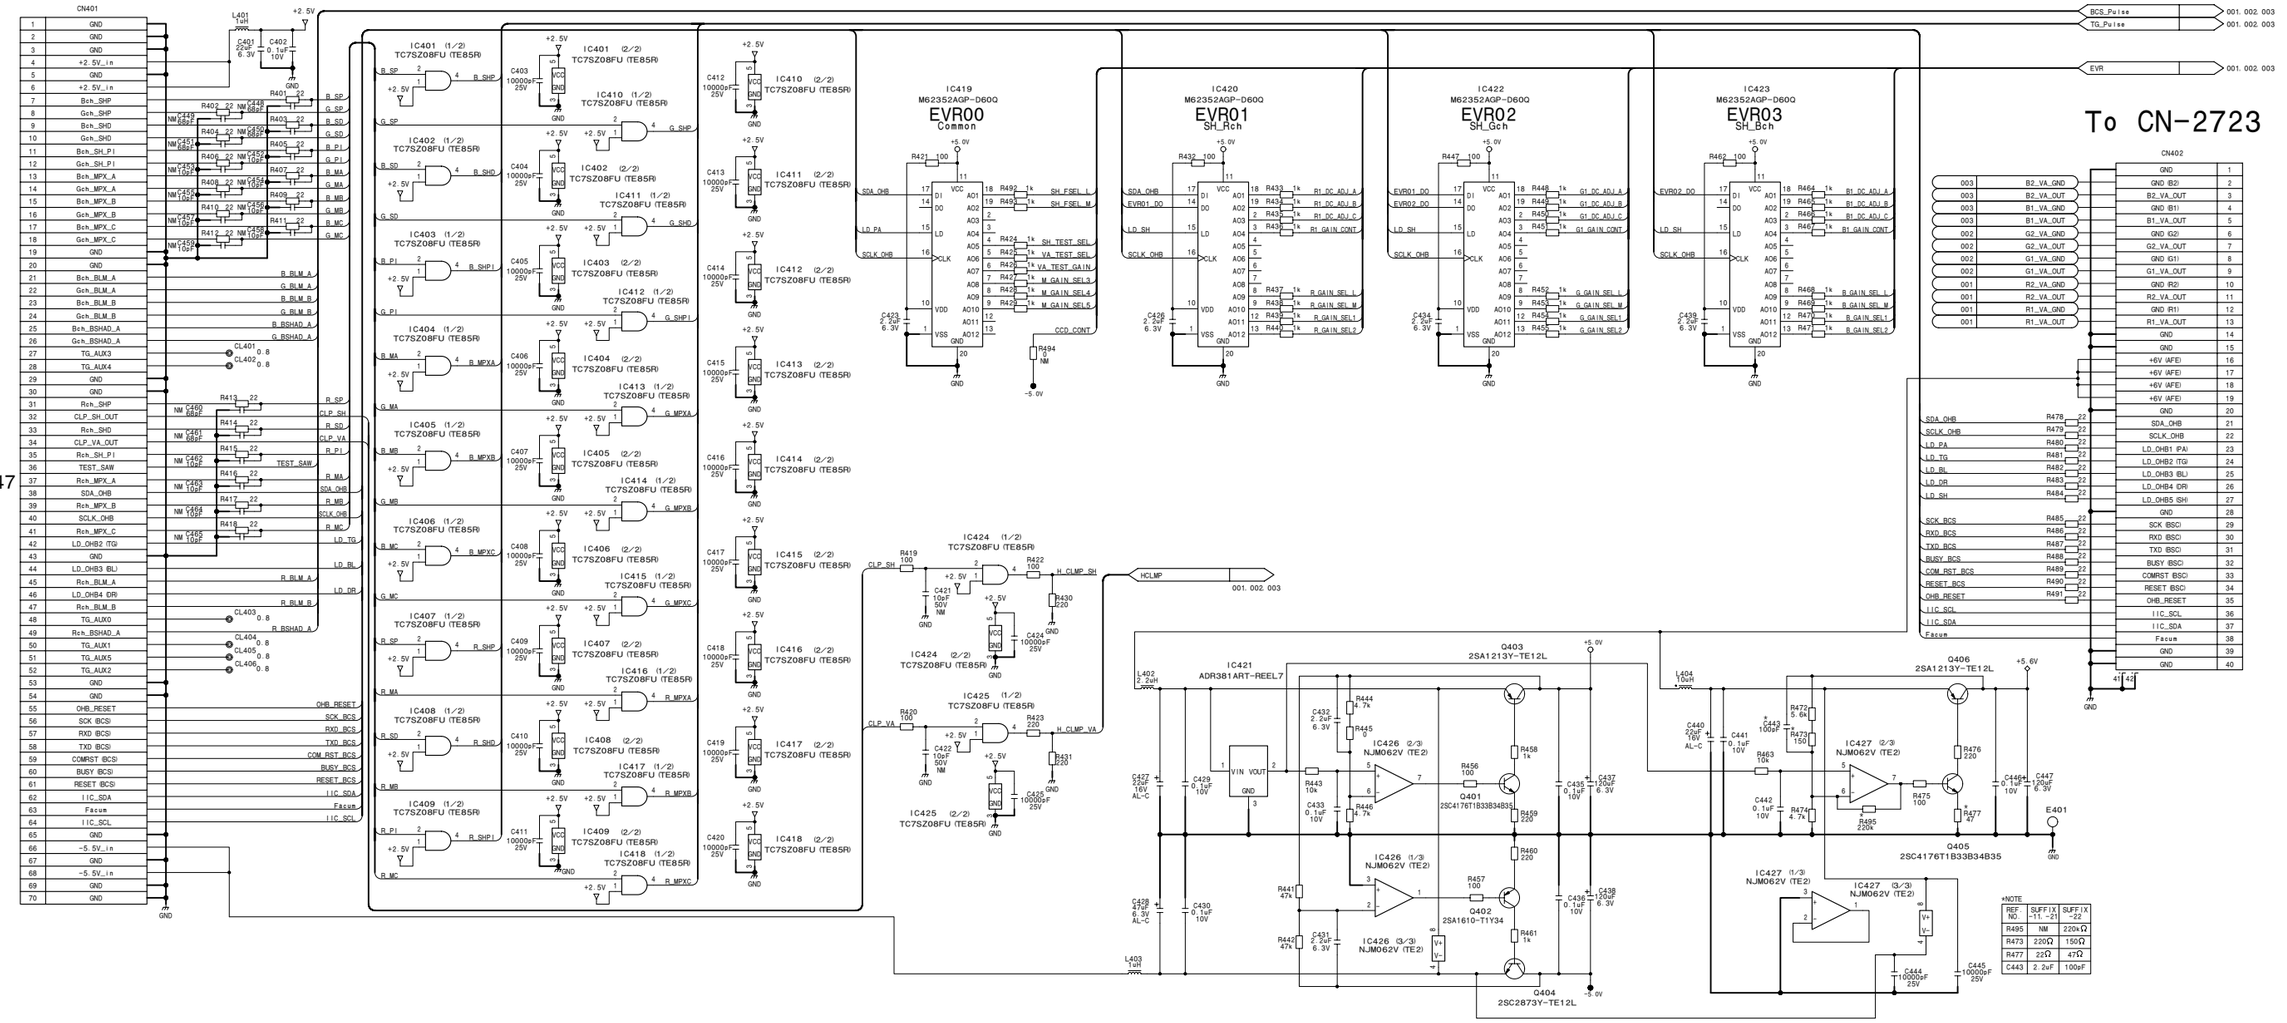
# SDI-84 (1/4)
**SUFFIX: -12, 13, 14**

# SDI-84 (1/4)
**SUFFIX: -12, 13, 14**




*NOTE

| REF NO. | SUFFIX 12 | SUFFIX 13- |
|---|---|---|
| C108 | - | NM |
| C163 | 1uF | NM |
| JC102 JC103 | 0 | - |
| R161 | 3.3k | - |
| R162 | 6.8k | - |
| R197 | C108 2.2k | 2.2k |
| R107 | 470 | 220 |
| Q105 | 2SA1774TL-QR | 2SB624-T1BV5 |



**SDI-84 (1/4)**
BOARD NO. 1-865-930-12, 13, 14
HDC-1500_SDI-84_013_1

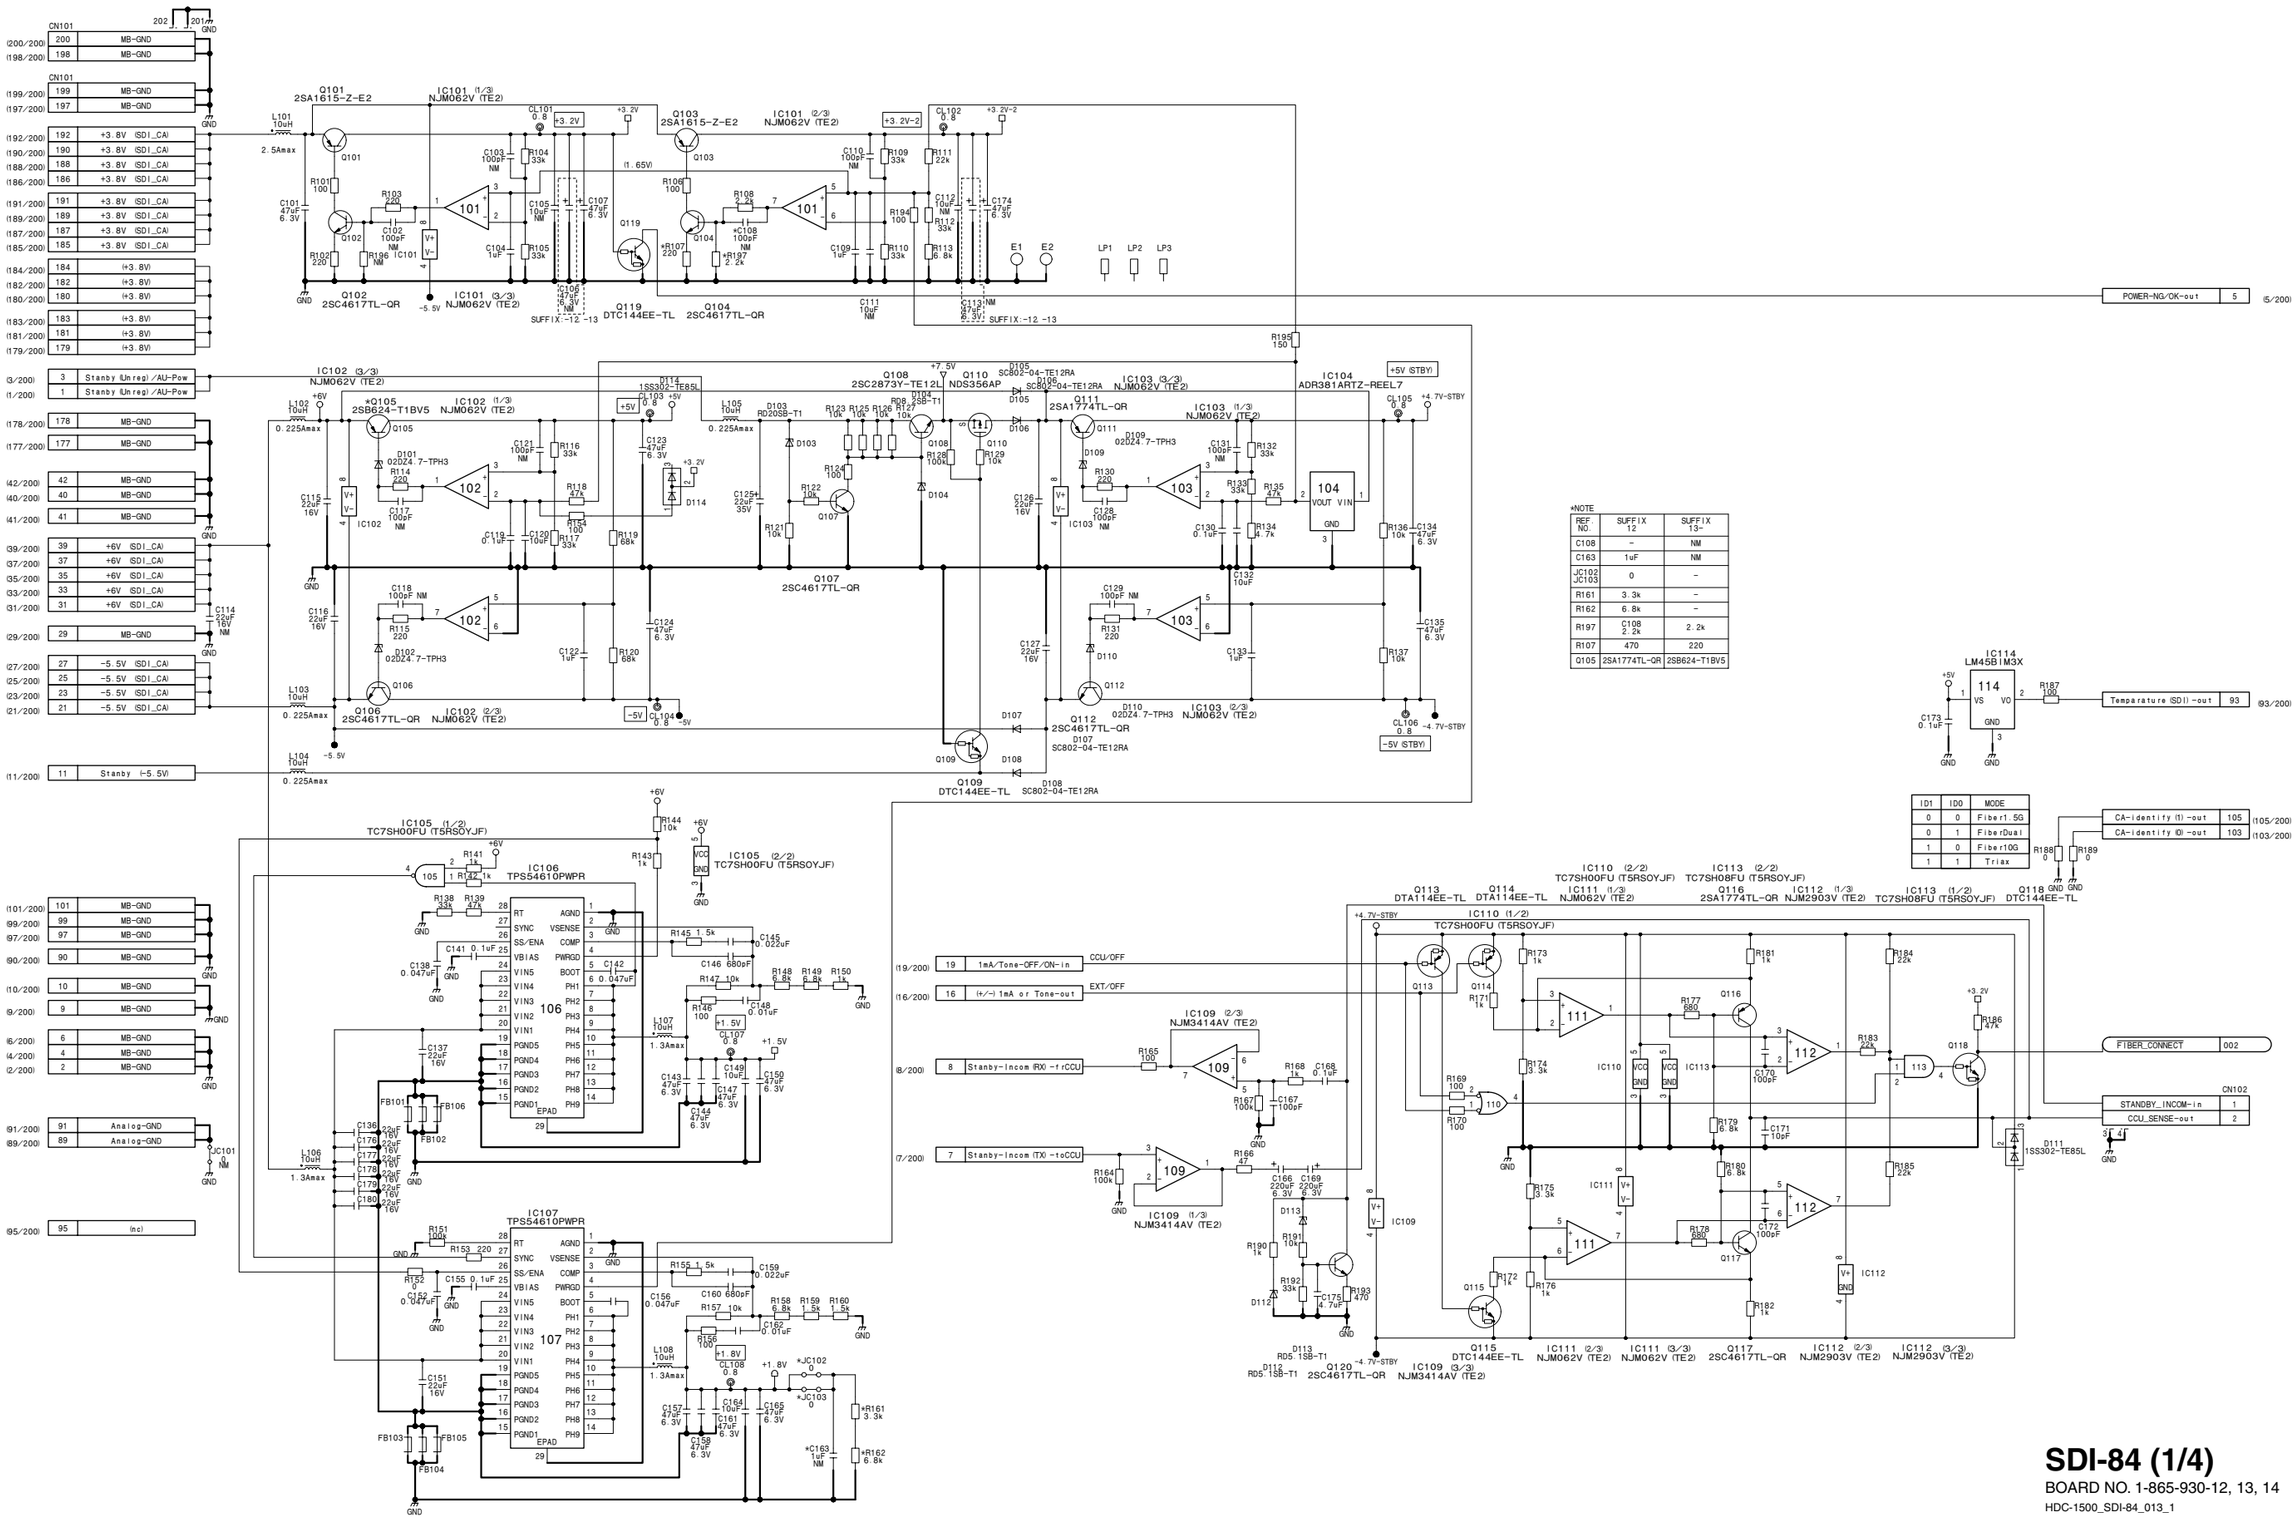
COMMAND MUX
EPR
IC207 (4/7) EP1C12F324C8N (300)
IC207 (5/7) EP1C1 2F324C8N (300)
IC207 (6/7) EP1C1 2F324C8N (300)
IC207 (7/7) EP1C1 2F324C8N (300)
IC207 (1/7) EP1C1 2F324C8N (300)
IC207 (2/7) EP1C1 2F324C8N (300)
IC212 EPC4QC100N
IC211 (5/5) 74VHC08MTCX
IC211 (2/5) 74VHC08MTCX
IC211 (1/5) 74VHC08MTCX
IC211 (4/5) 74VHC08MTCX
IC206 (1/2) TC7SH08FU (T5RSOYJF)
IC205 (2/2) TC7SH08FU (T5RSOYJF)
IC206 (2/2) TC7SH08FU (T5RSOYJF)
IC205 (1/2) TC7SH08FU (T5RSOYJF)
IC209A RN5VD29AA-TL-FA
IC202 74VHC245MTCX
IC220 (1/2) TC7SZ04FU (TE85R)
IC221 (1/2) TC7SZ04FU (TE85R)
IC201 (1/2) TC7SZ04FU (TE85R)
IC218 (1/2) TC7SZ04FU (TE85R)
IC219 (1/2) TC7SZ04FU (TE85R)
IC220 (2/2) TC7SZ04FU (TE85R)
IC221 (2/2) TC7SZ04FU (TE85R)
IC201 (2/2) TC7SZ04FU (TE85R)
IC218 (2/2) TC7SZ04FU (TE85R)
IC219 (2/2) TC7SZ04FU (TE85R)
IC220 (2/2) TC7SZ04FU (TE85R)
IC221 (2/2) TC7SZ04FU (TE85R)
COMMAND MUX
EPR
JTAG_BUS
PLD-Dome
MAIN 7-IN
MAIN F
MAIN H
CPU_BUS
CPU-CLK
CPU-GND
LO_RESET
MAIN_CLK74
SW201
Te = 0.69 x 1M x Cd [sec]

**SDI-84 (2/4)**
**SUFFIX: -12, 13, 14**




**SDI-84 (2/4)**
BOARD NO. 1-865-930-12, 13, 14
HDC-1500_SDI-84_012_2


RET INPUT
002 CPU_BUS
RET_LOCKED 002
RET_ERROR 002
FTBER/COAX 004
COAX/FIBER 004
EXT_SDI_NOSIGNAL 002 004
RESET-RET 002
RET_ON 002
RET_LOCKED 002
EXT_SDI_LOCKED 002 004
EXT_SDI_SD/HD 002 004
EXT_VBS_NOSIGNAL 002 004
EXT_VBS_NTSC/PAL 002 004
SPARE1 002
SPARE2 002
SPARE3 002
SPARE4 002
SPARE5 002
SPARE6 002
SPARE7 002
SPARE8 002
AU-64FS 002
AU-LRCK 002
EXT_SDI 004
EXT_VBS 004
EXT_SDI (Y) 004
EXT_SDI (C) 004
IC403 GS1561-CFE3
IC405 (1/2) TC7SZ04FU (TE85R)
IC405 (2/2) TC7SZ04FU (TE85R)
IC402 MC10EP57DTR2
IC401 (1/2) TC7SH08FU (T5RSOYJF)
IC401 (2/2) TC7SH08FU (T5RSOYJF)
IC404 (1/2) TC7SZ125FU (TE85R)
IC404 (2/2) TC7SZ125FU (TE85R)
IC407 74VHC245MTCX
CP401 O/E Conv. OE-301
TP401 RET 74M
Q401 DTC144EE-TL
Q402 DTA144EE-TL
Q403 DTC144EE-TL
Q404 DTA144EE-TL
Q405 DTC144EE-TL
Q406 NDS356AP
Q407 2SC4617TL-QR
Q408 DTC144EE-TL
Q409 NDS356AP
Q410 2SC4617TL-QR
Q411 DTA144EE-TL
Q412 NDS356AP
X401
RET_LOCK
SDI_LOCK
SDI_SD/HD
VBS_NOSIG
VBS_N/PAL
SP1
SP2
SP3
SP4
SP5
SP6
SP7
SP8
AU-64FS
AU-LRCK
RE-CLK74
RE-Y9
RE-Y8
RE-Y7
RE-Y6
RE-Y5
RE-Y4
RE-Y3
RE-Y2
RE-Y1
RE-Y0
RE-C9
RE-C8
RE-C7
RE-C6
RE-C5
RE-C4
RE-C3
RE-C2
RE-C1
RE-C0
RE-H
RE-V
RE-F
RX-CoPRO-XIRQ-out 18 (18/200)
700Protc-RX (fCCU) -out 13 (13/200)
Audio RX0 -1/2-out 34 (34/200)
Audio RX0 -3/4-out 32 (32/200)
Audio RX0 -5/6-out 30 (30/200)
Audio RX0 -7/8-out 28 (28/200)
AURX-12
AURX-34
AURX-56
AURX-78
+2.5V-VCO_RET
+3.2V-R
+3.2V-2R
+3.2V-OPTRX
+1.8V-R
+3.2V
+3.2V-2
+1.8V
+1.8V-R
GND-VCO-R
-5V

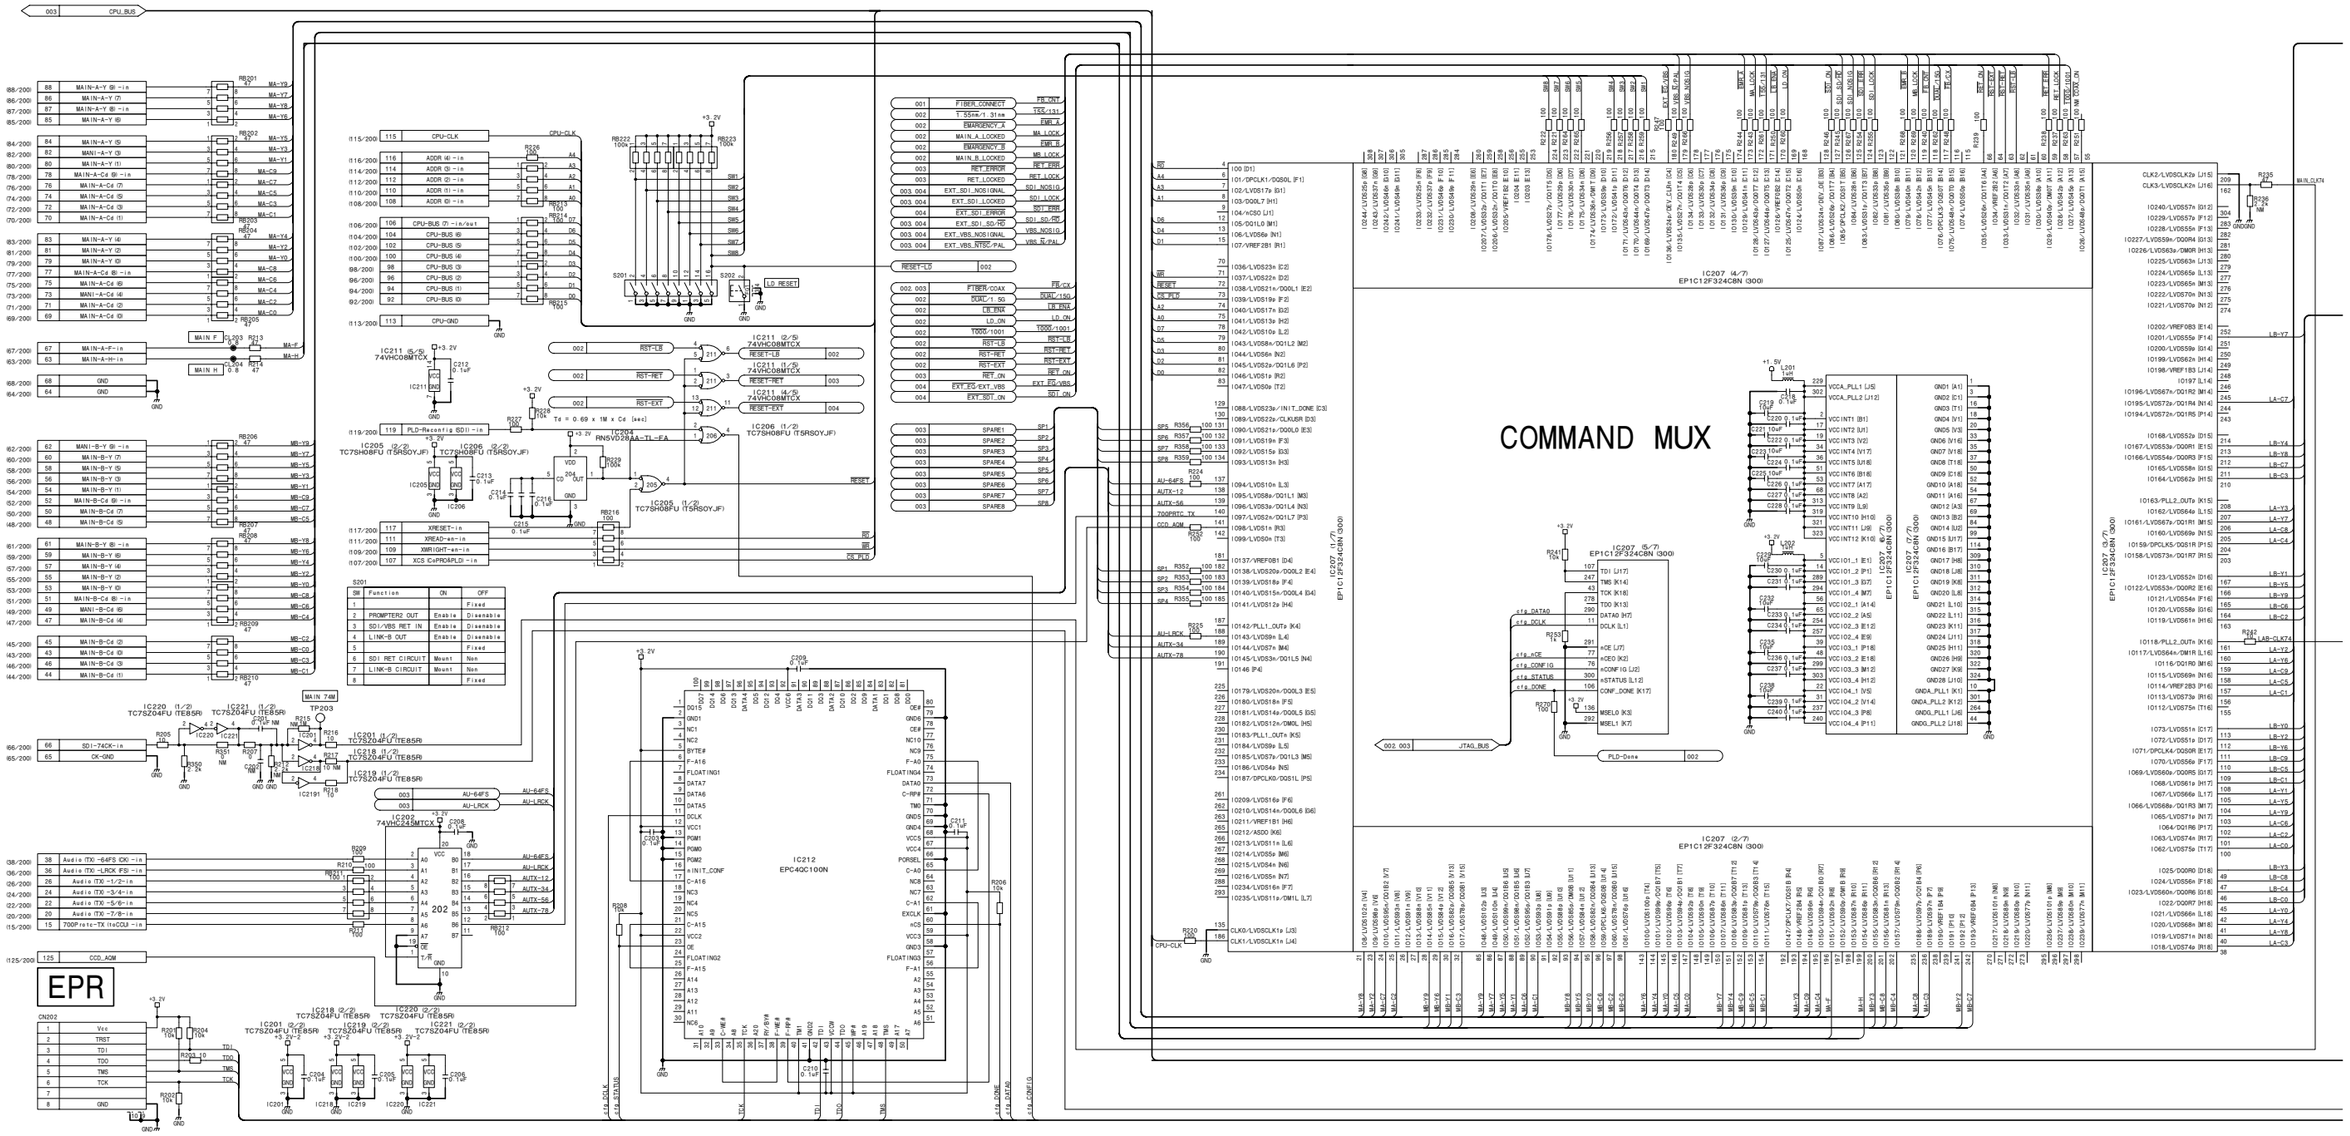


# SDI-84 (3/4)

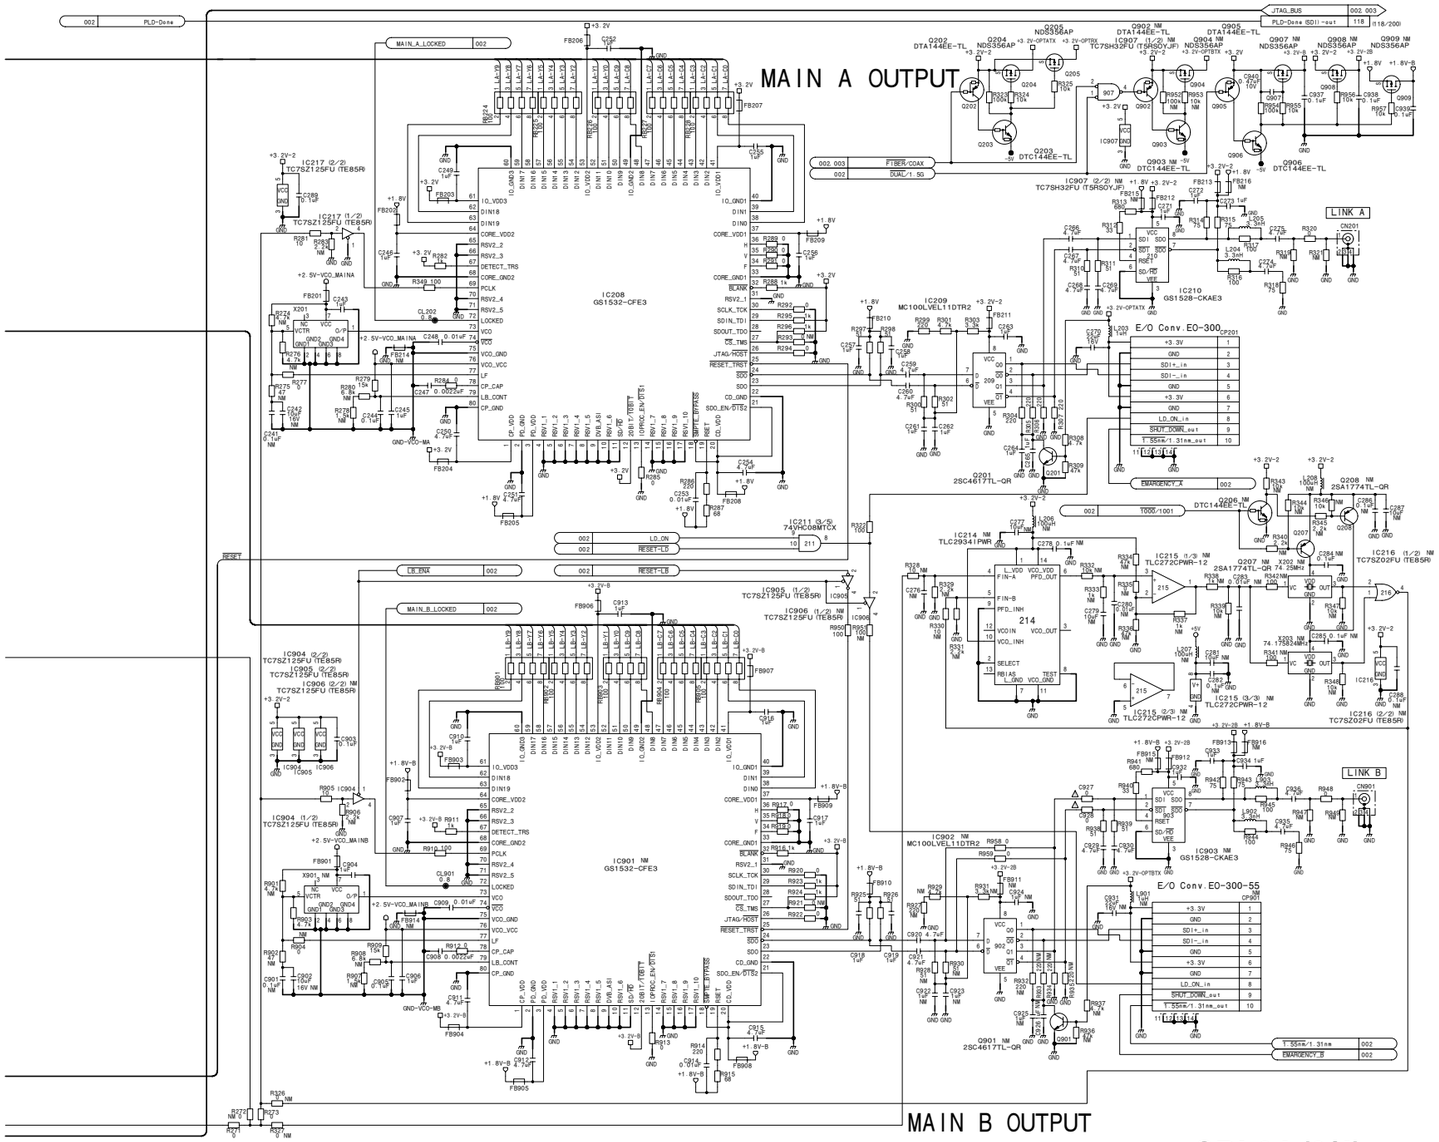BOARD NO. 1-865-930-12, 13, 14

HDC-1500_SDI-84_012_3

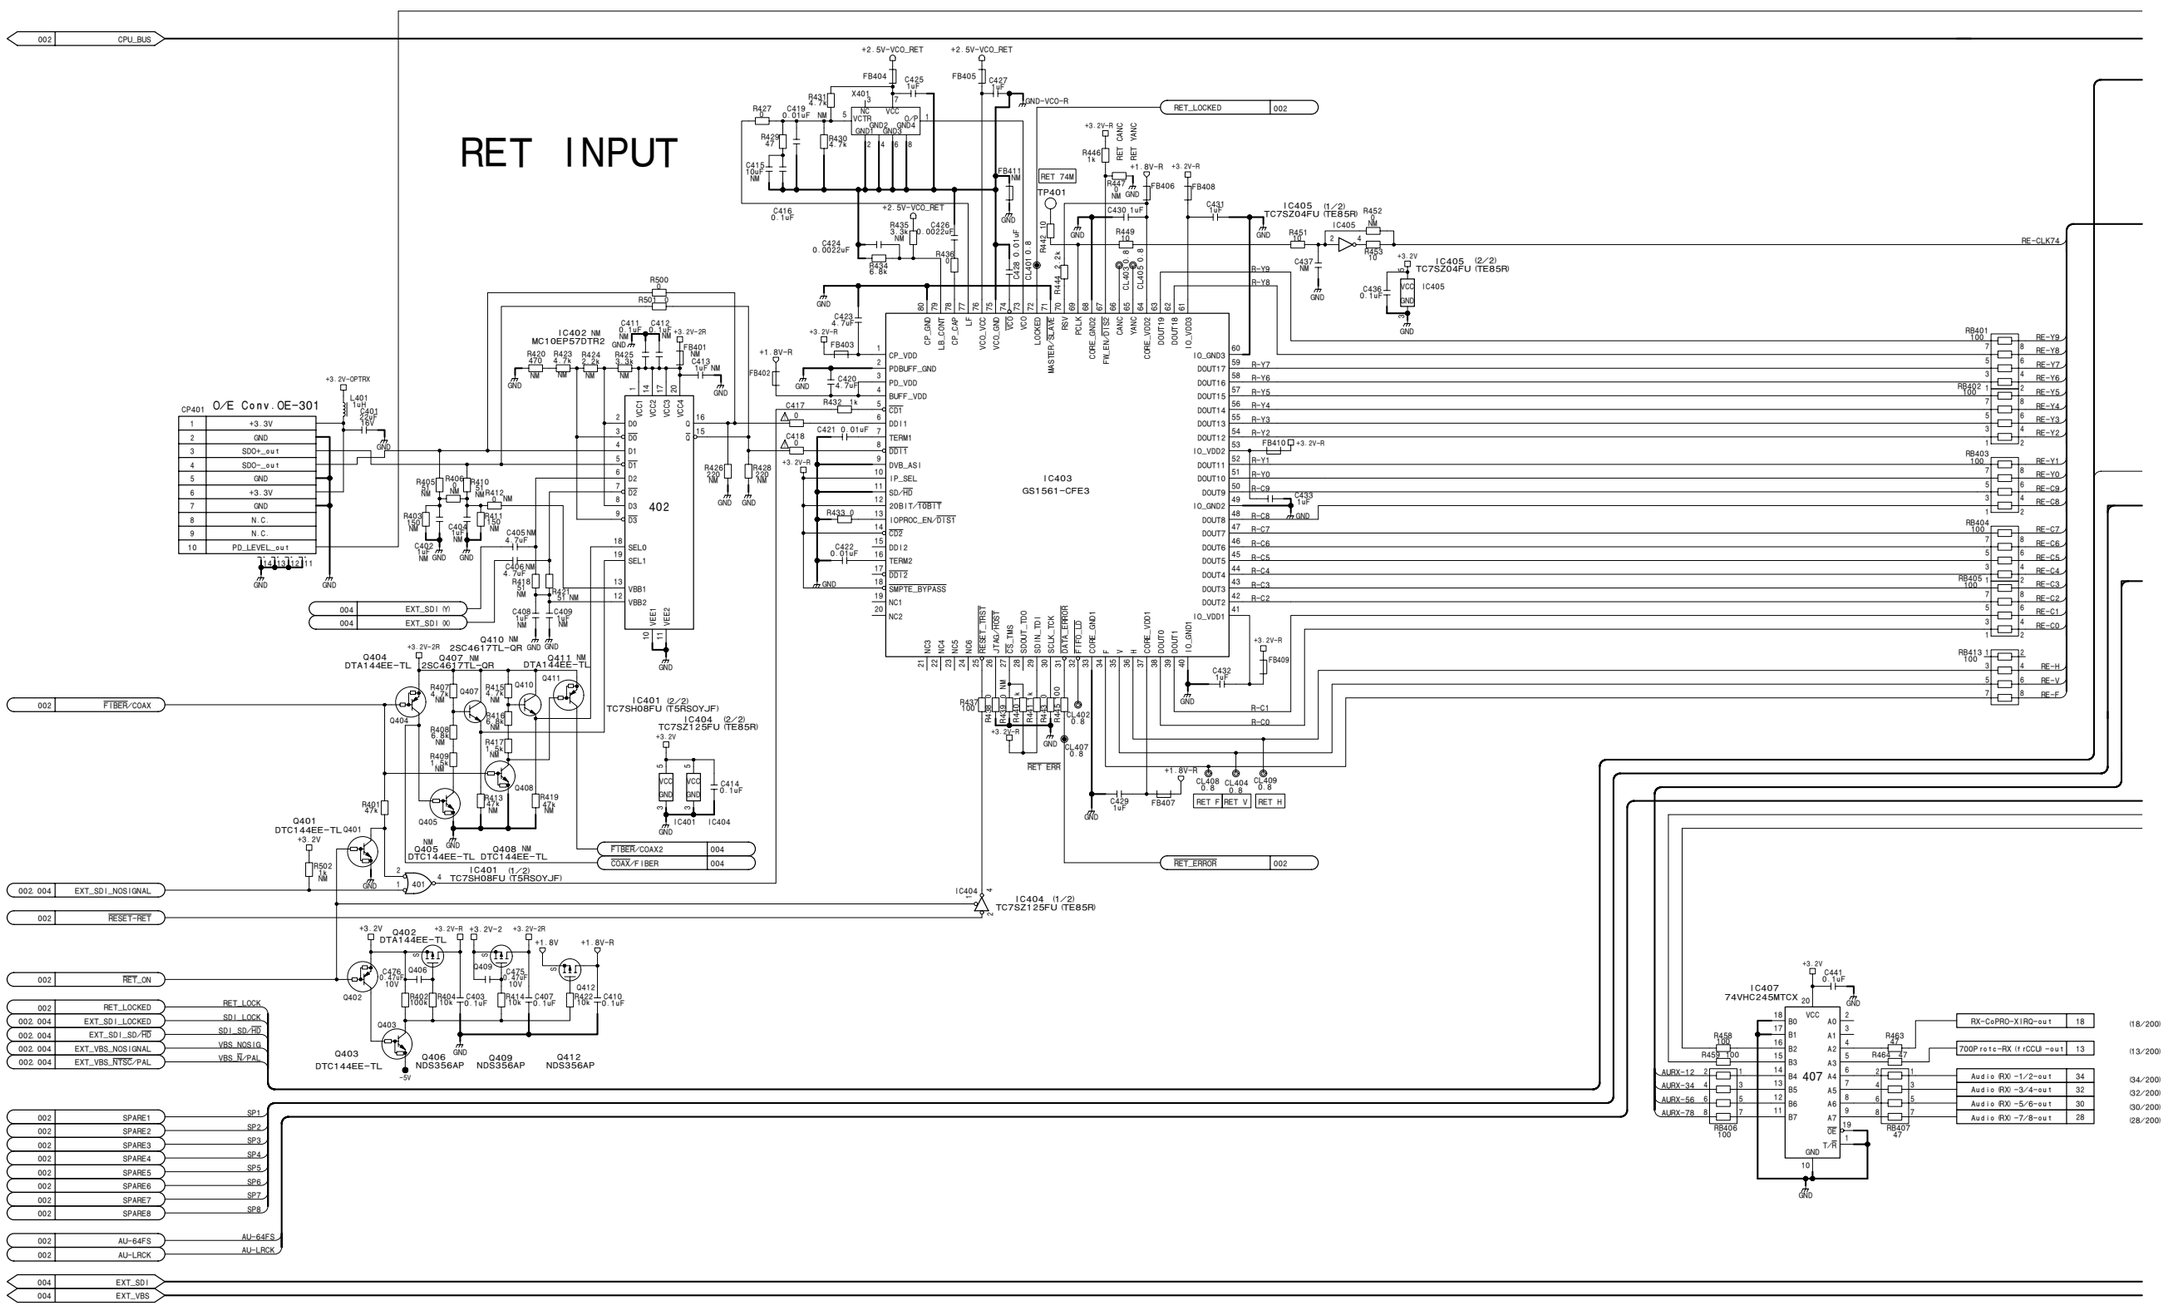
EXT HD/SD-SDI INPUT
EXT VIDEO IN
IC605 NM
GS1561-CFE3
IC601 NM
GS1524-CKDE3
IC603 NM
MC100LVEL11DTR2
IC604 (1/2)
TC7SH00FU (T5RSOYJF)
IC604 (2/2)
TC7SH00FU (T5RSOYJF)
IC607 (2/2) NM
TC7SZ04FU (TE85R)
IC607 (1/2) NM
TC7SZ04FU (TE85R)
IC602 (1/2)
TC7SZ125FU (TE85R)
IC602 (2/2)
TC7SZ125FU (TE85R)
IC606 (2/2)
TC7SZ125FU (TE85R)
IC606 (1/2)
TC7SZ125FU (TE85R)
IC701 (1/2)
TC7SH00FU (T5RSOYJF)
IC701 (2/2)
TC7SH00FU (T5RSOYJF)
Q601 2SC5245-4/5-TL-E
Q602 NM 2SC5245-4/5-TL-E
Q603 2SC4617TL-QR
Q604 2SA1774TL-QR
Q605 NM 2SC4617TL-QR
Q606 2SC4617TL-QR
Q607 DTA144EE-TL
Q608 DTC144EE-TL
Q609 NM NDS356AP
Q610 DTA144EE-TL
Q611 DTC144EE-TL
Q612 NM NDS356AP
Q613 NM NDS356AP
Q614 NM NDS356AP
Q617 NM NDS356AP
X601 NM
TP603
SDI LOCKED
SDI 74M-27M
SDI CANC
SDI YANC
SDI ERR
EXT_SDI (Y)
EXT_SDI (C)
FIBER/COAX2
COAX/FIBER
EXT_EQ/EXT_VBS
EXT_SDI_ON
RESET-EXT
VBS_SCL
VBS_SDA
RET-27M-CK-in
MB-GND
PROMPTER1
PROMPTER2
ES-Y7
ES-Y6
ES-Y5
ES-Y4
ES-Y3
ES-Y2
ES-Y1
ES-Y0
ES-C9
ES-C8
ES-C7
ES-C6
ES-C5
ES-C4
ES-C3
ES-C2
ES-C1
ES-C0
ES-H
ES-V
ES-F
SDI H
SDI V
SDI F

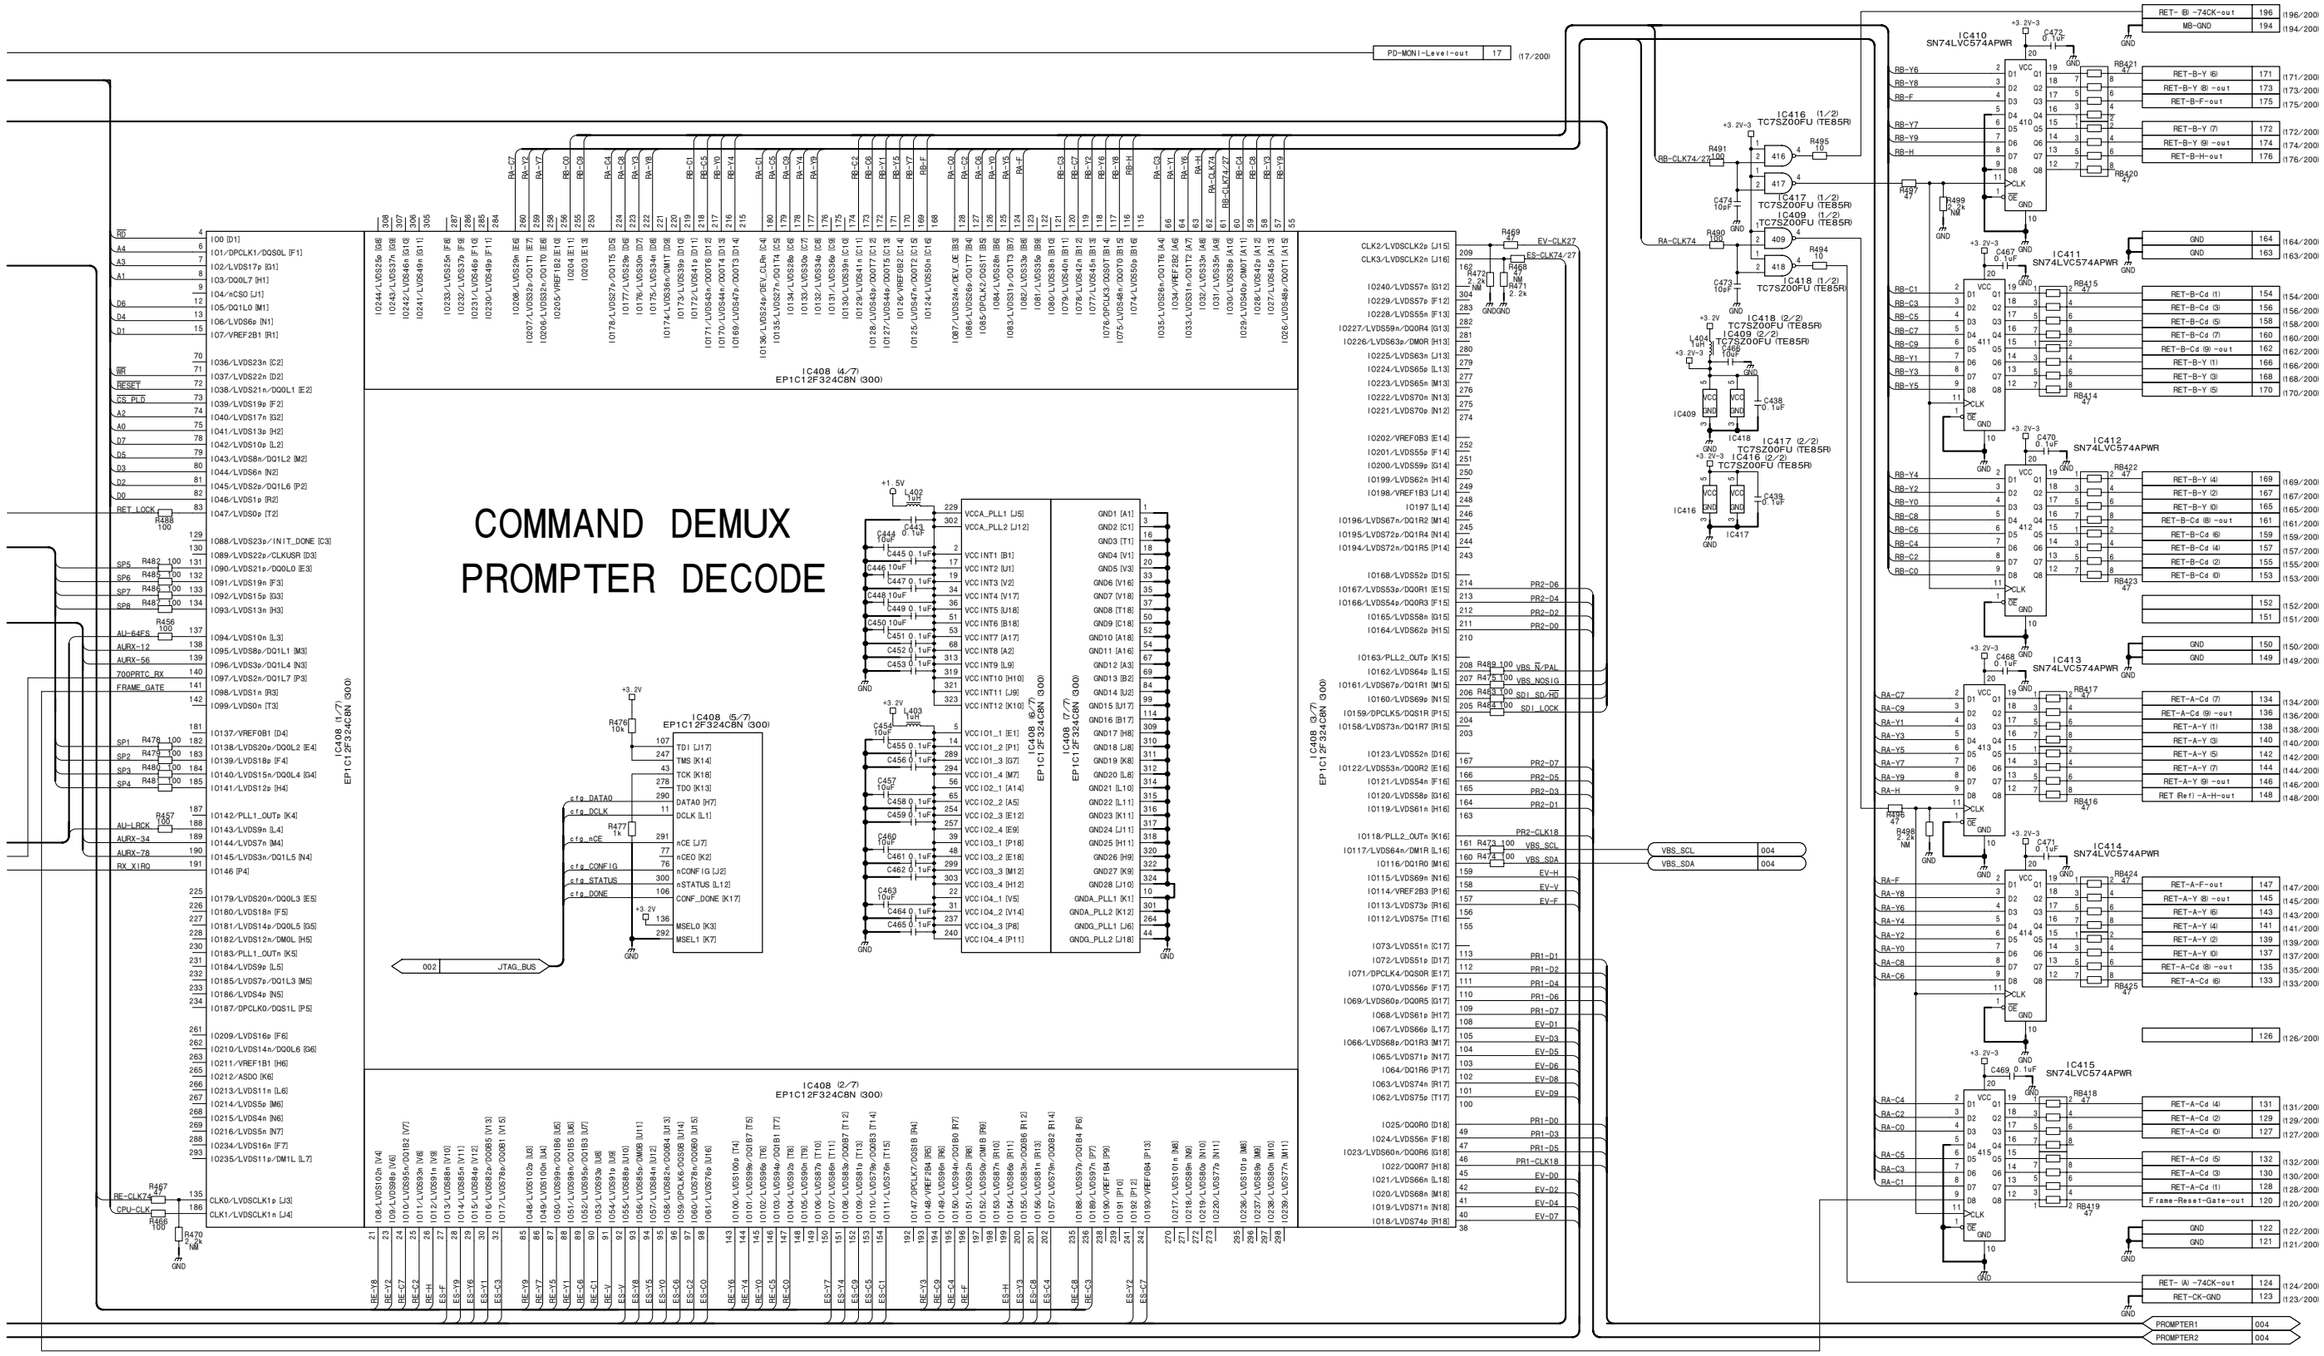EXT_SDI_NOSIGNAL 002, 003
EXT_SDI_ERROR 002
EXT_SDI_SD/HD 002, 003
EXT_SDI_LOCKED 002, 003
EXT_SDI 003
EXT_VBS_NTSC/PAL 002, 003
EXT_VBS 003
EXT_VBS_NOSIGNAL 002, 003

EXT VBS INPUT

PROMPTER1 OUTPUT

PROMPTER2 OUTPUT
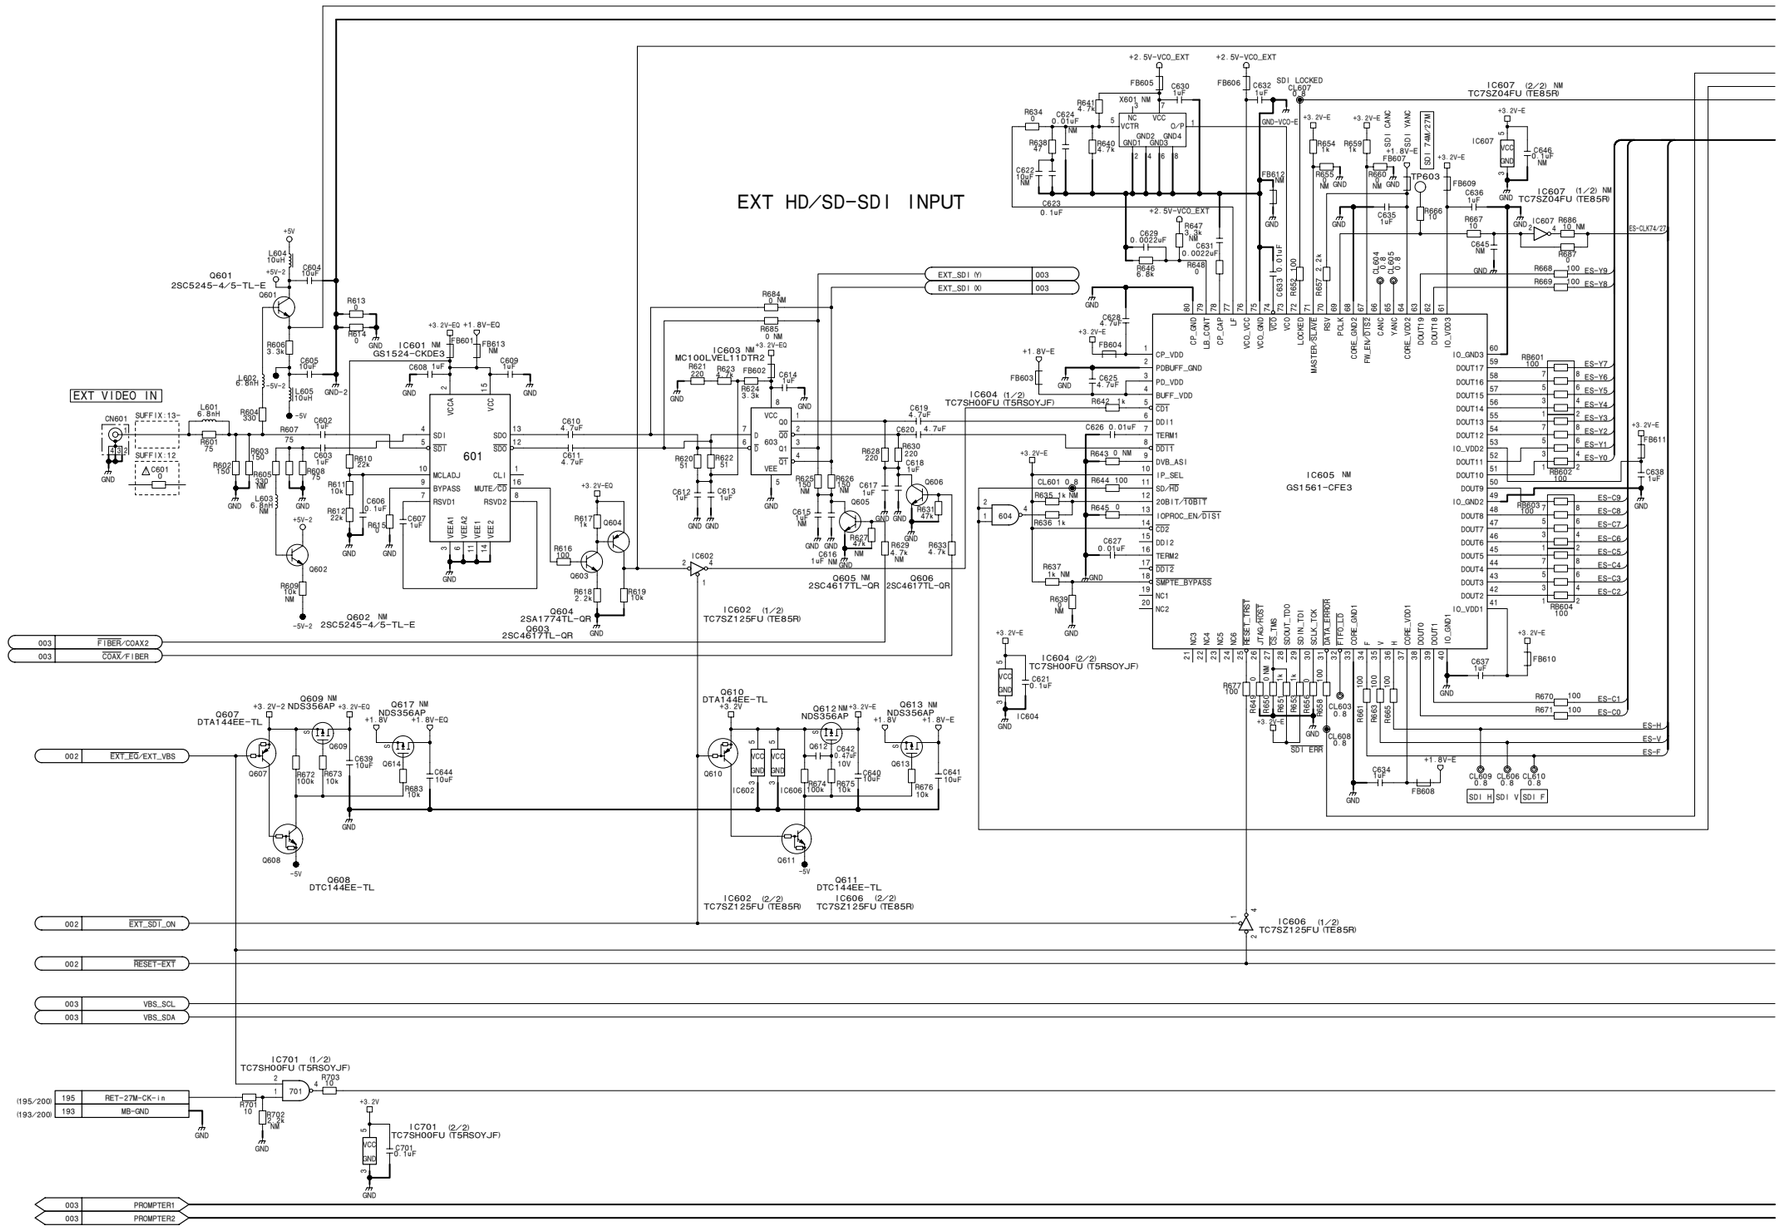
# SDI-84 (4/4)

BOARD NO. 1-865-930-12, 13, 14

HDC-1500_SDI-84_013_4

# SDI-84C (1/4)

**SUFFIX: -13, 14**

SDI-84C (1/4)
SUFFIX: -13, 14




## SDI-84C (1/4)

BOARD NO. 1-865-930-13, 14

HDC-1500_SDI-84C_001_1


COMMAND MUX
EPR
CPU_BUS
IC207 (4/7) EP1C12F324C8N (300)
IC207 (5/7) EP1C12F324C8N (300)
IC207 (2/7) EP1C12F324C8N (300)
IC207 (1/7) EP1C12F324C8N (300)
IC212 EPC4QC100N
JTAG_BUS
MAIN 7-IN
MAIN F
MAIN H
MAIN 4-OUT
MAIN 7-OUT
MAIN CLK74
MAIN CLK27
MAIN CLK148
MAIN CLK74 (NM)
MAIN CLK27 (NM)
MAIN CLK148 (NM)
MAIN 7-OUT (NM)
MAIN 4-OUT (NM)
MAIN F (NM)
MAIN H (NM)
MAIN 7-IN (NM)
S201
SW Function ON OFF
1 Fixed
2 PROMPTER2 OUT Enable Disenable
3 SDI/VBS RET IN Enable Disenable
4 LINK-B OUT Enable Disenable
5 Fixed
6 SDI RET CIRCUIT Mount Non
7 LINK-B CIRCUIT Mount Non
8 Fixed

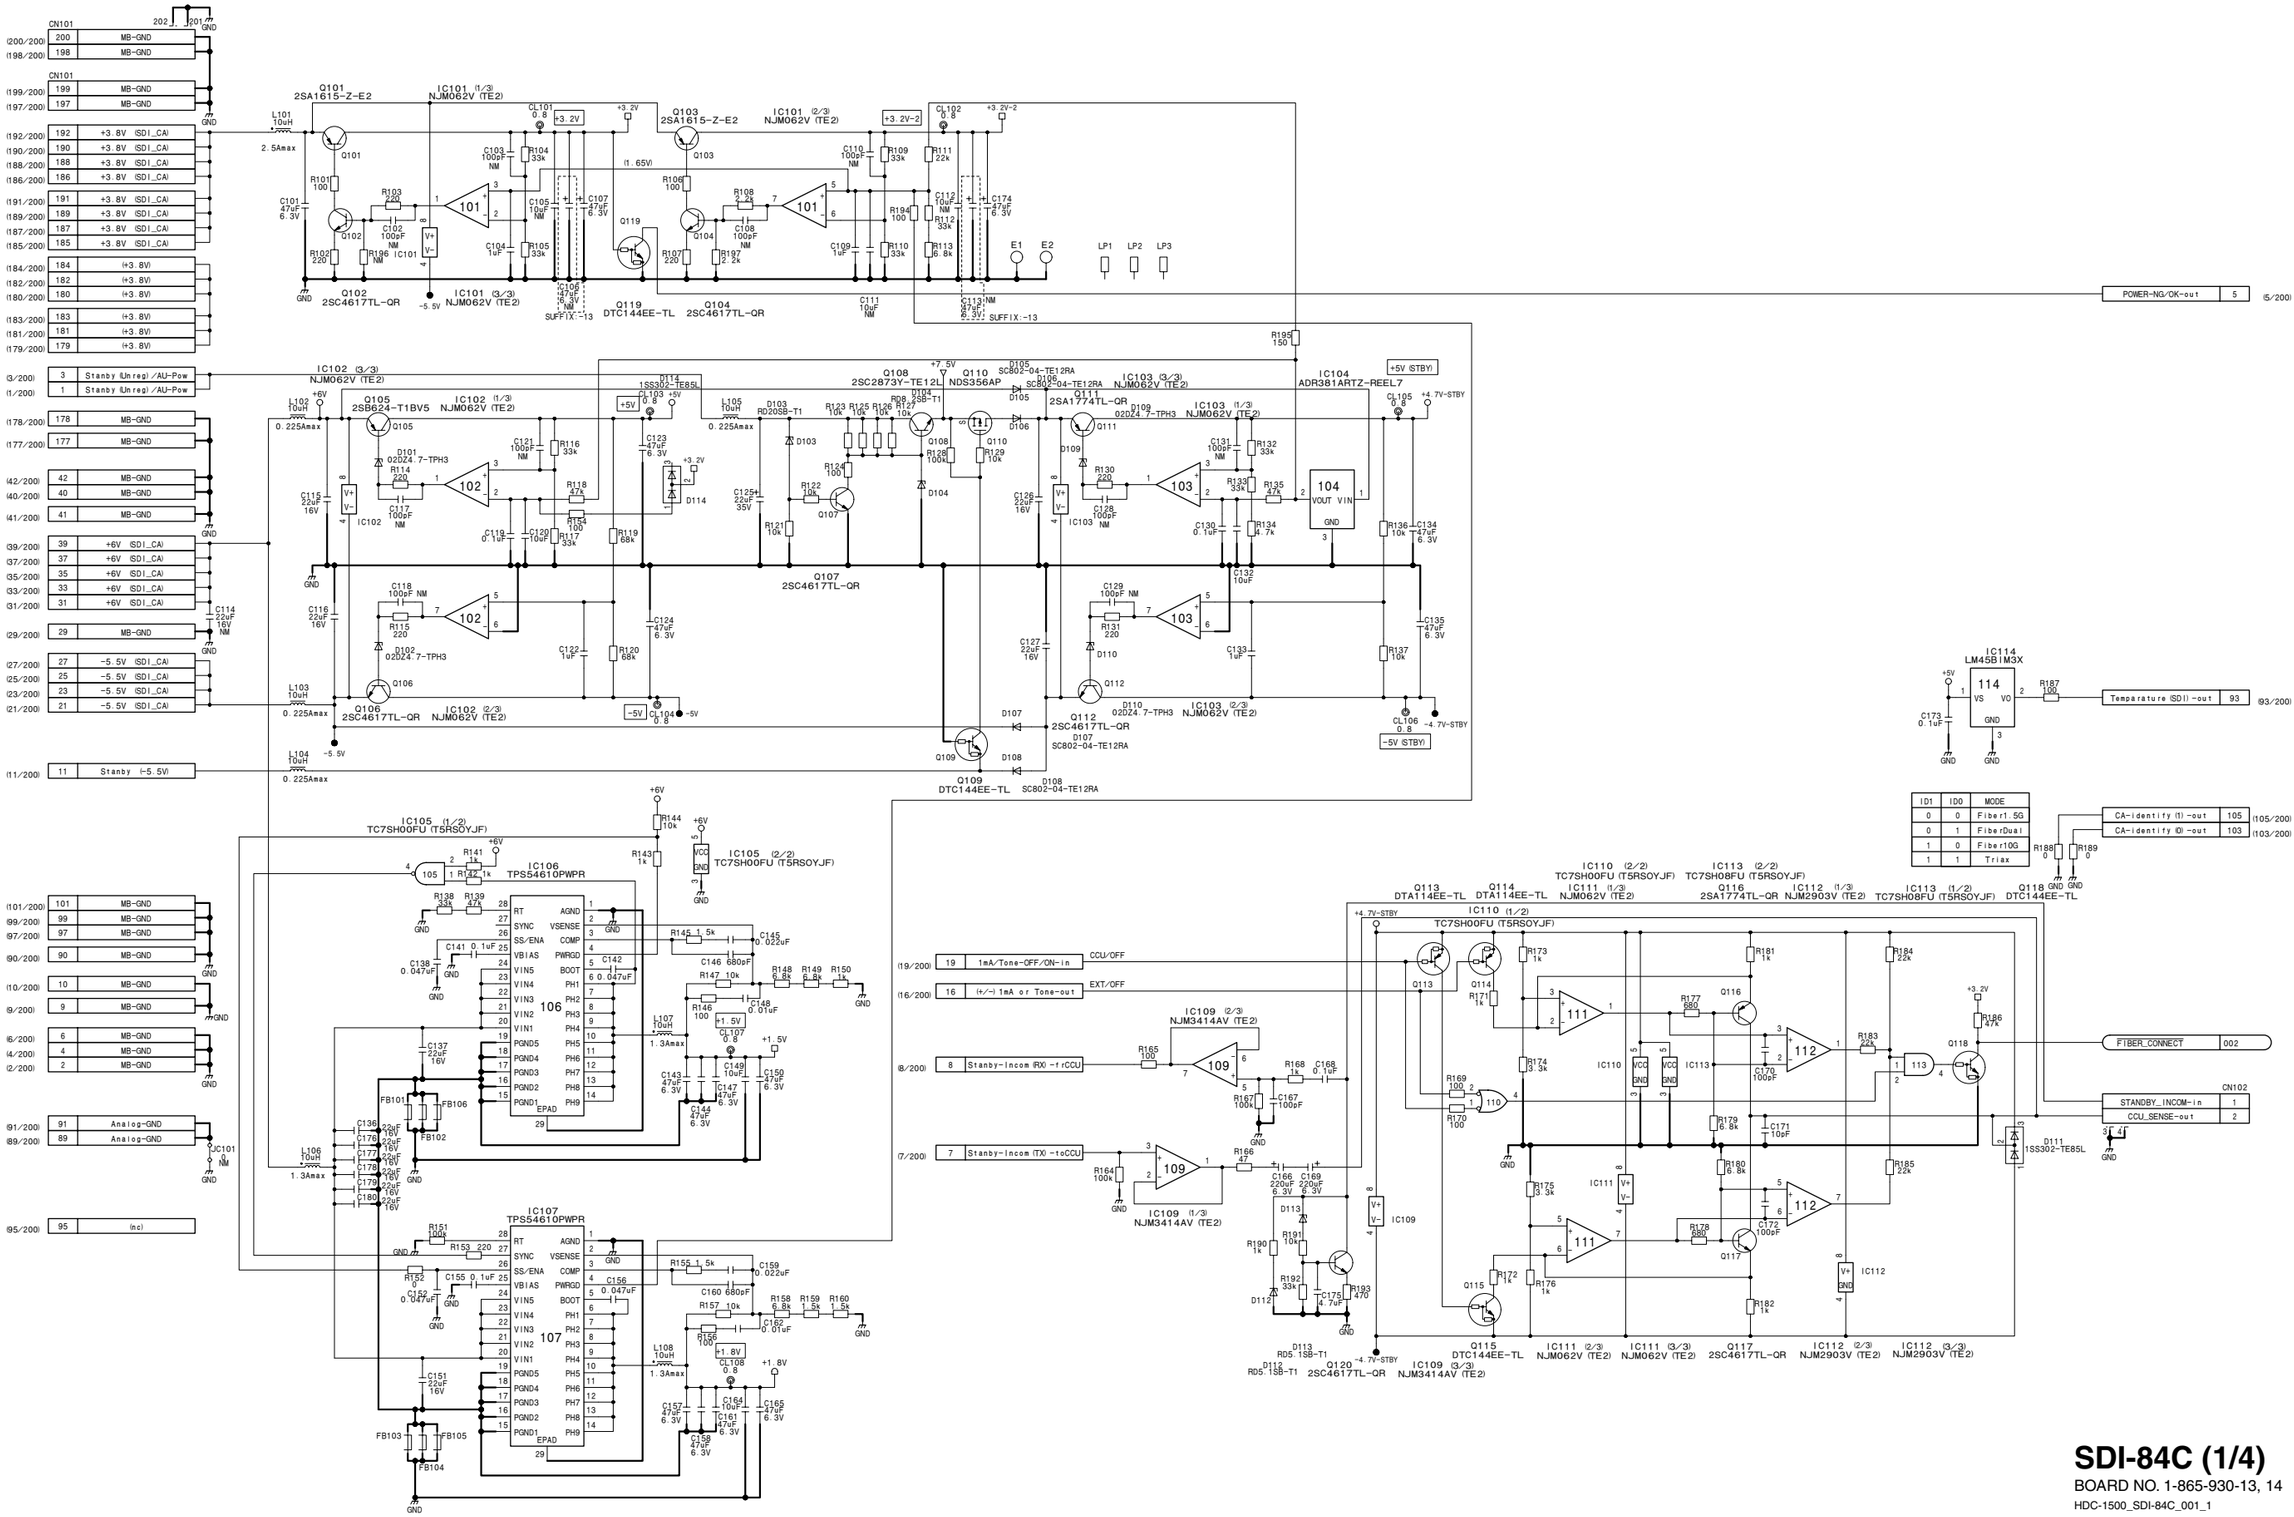


# SDI-84C (2/4)

BOARD NO. 1-865-930-13, 14

HDC-1500_SDI-84C_001_2
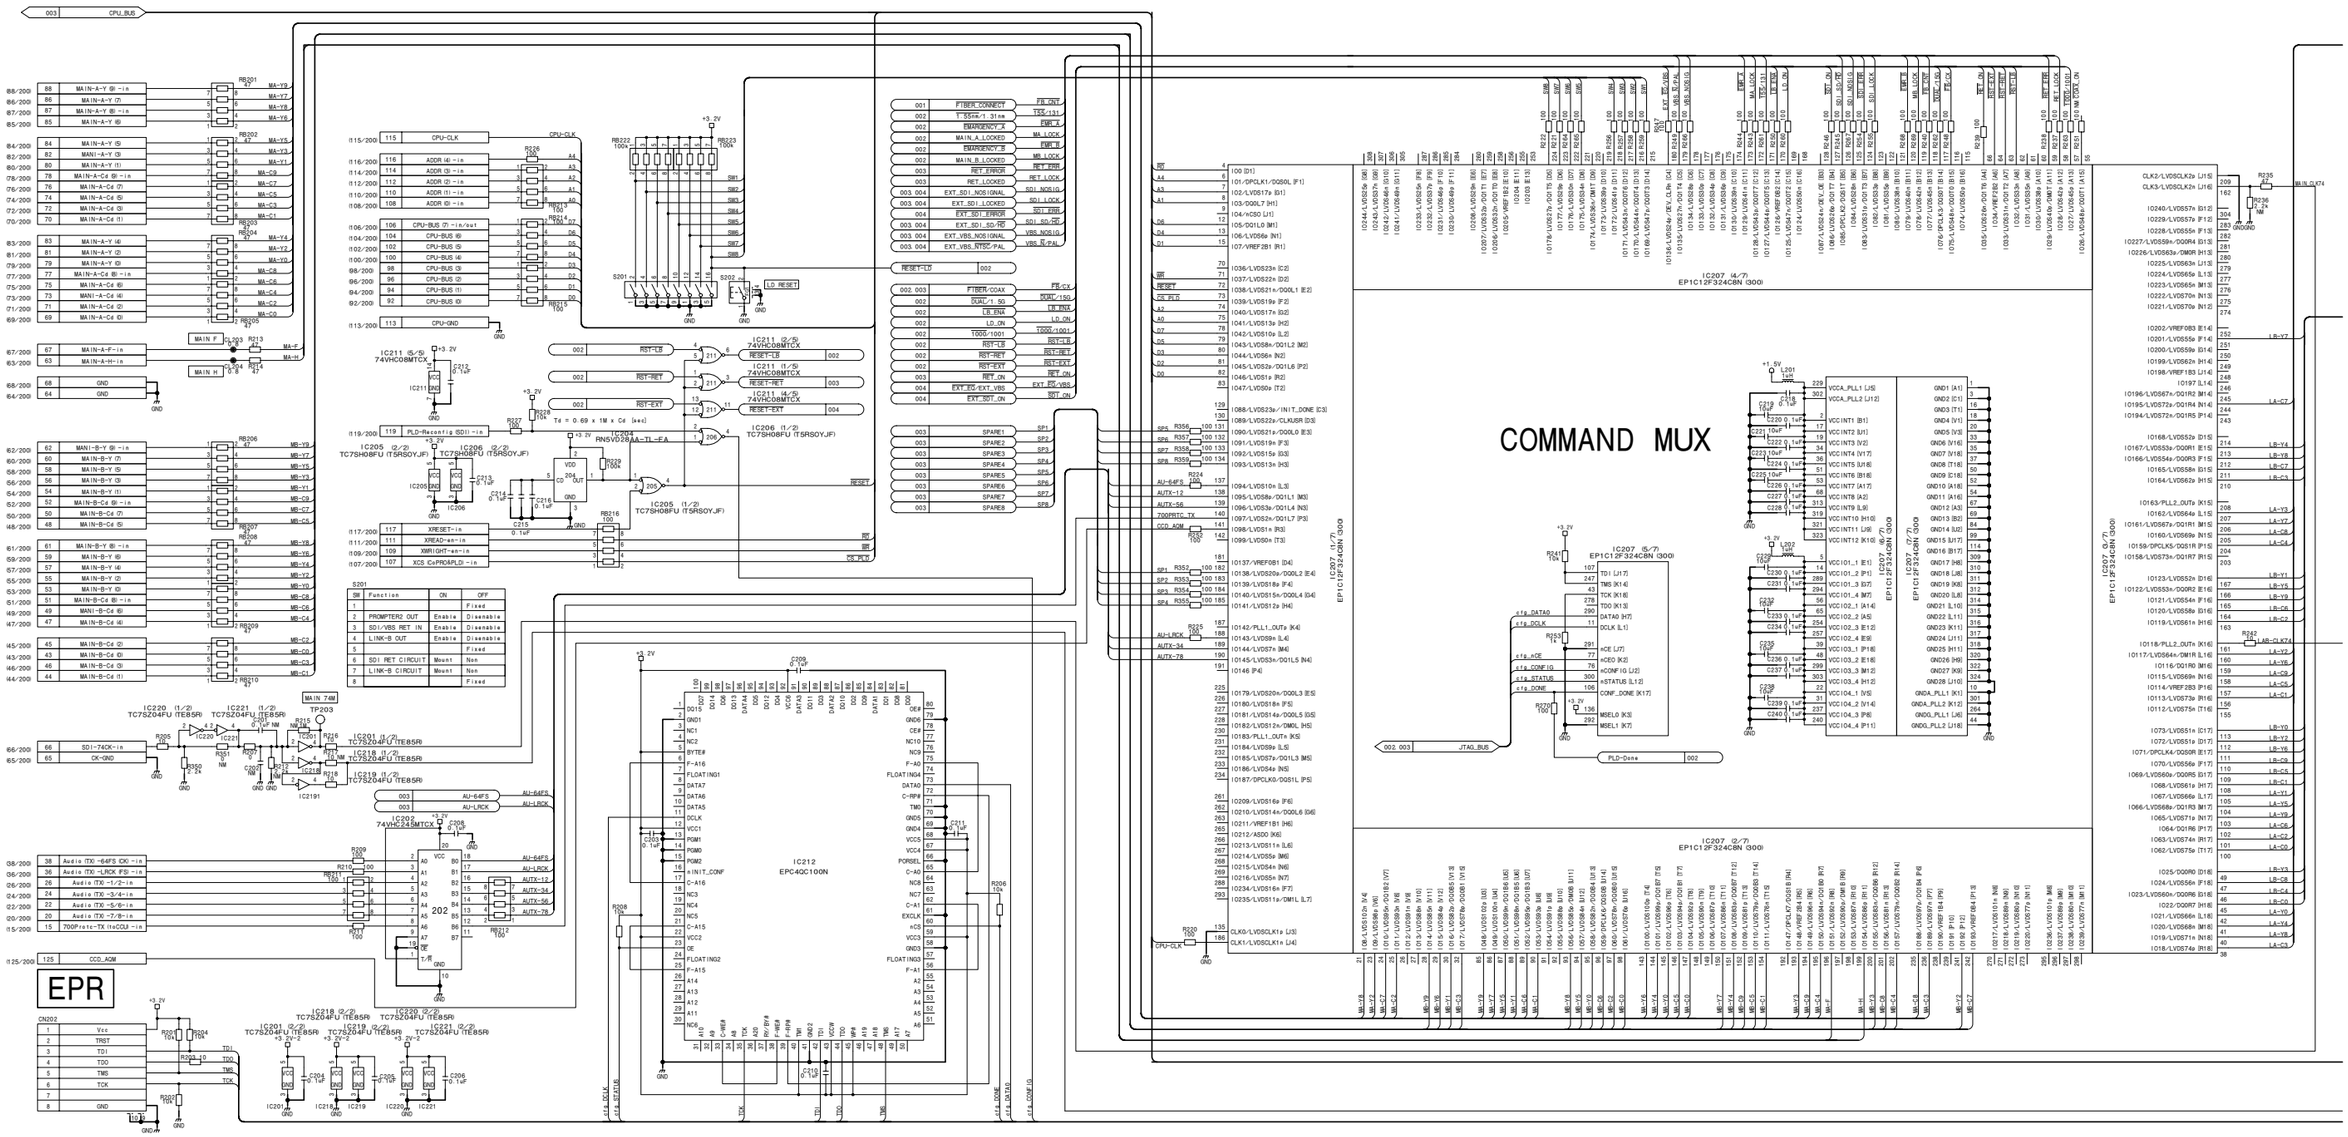
# RET INPUT

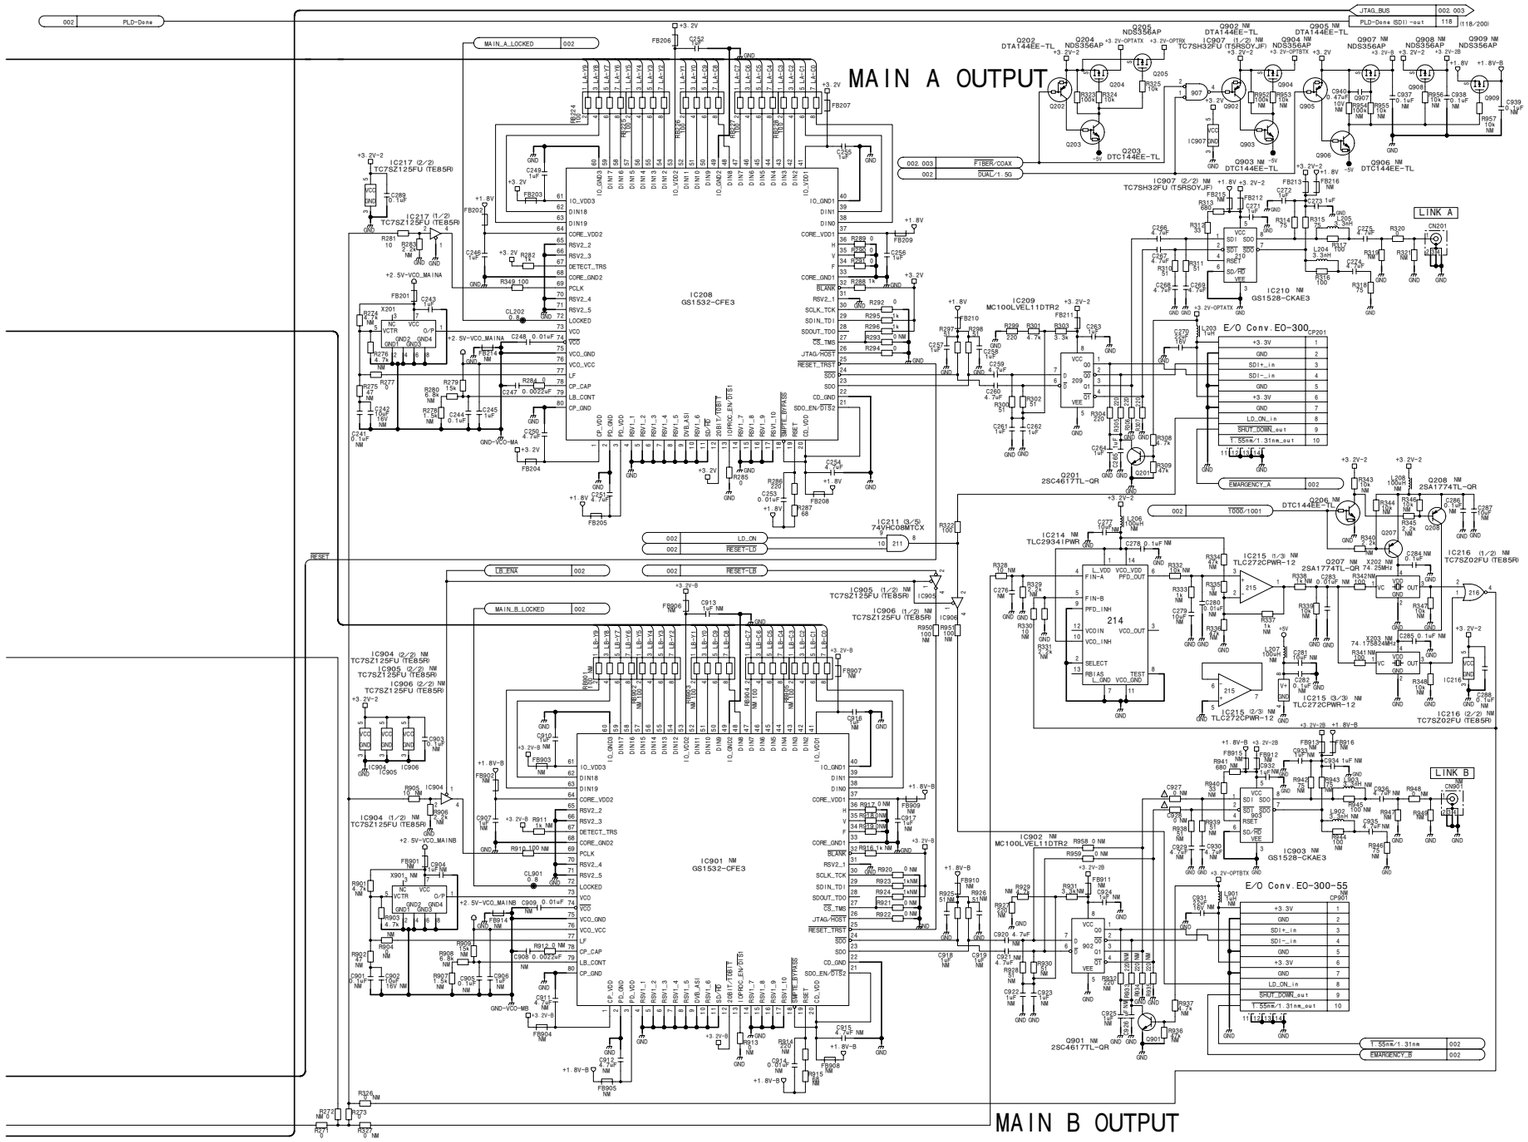
002 CPU_BUS
RET_LOCKED 002. 003
RET_ERROR 002
FTBER/COAX 002
FTBER/COAX2 004
COAX-FIBER 004
002. 004 EXT_SDI_NOSIGNAL
002 RESET-RET
002 RET_ON
002. 003 RET_LOCKED
002. 004 EXT_SDI_LOCKED
002. 004 EXT_SDI_SD/HD
002. 004 EXT_VBS_NOSIGNAL
002. 004 EXT_VBS_NTSC/PAL
004 EXT_SDI (Y)
004 EXT_SDI (C)
002 SPARE1
002 SPARE2
002 SPARE3
002 SPARE4
002 SPARE5
002 SPARE6
002 SPARE7
002 SPARE8
002 AU-64FS
002 AU-LRCK
004 EXT_SDI
004 EXT_VBS
CP401 O/E Conv. OE-301
IC403 GS1561-CFE3
IC402 NM MC10EP57DTR2
IC405 (1/2) TC7SZ04FU (TE85R)
IC405 (2/2) TC7SZ04FU (TE85R)
IC401 (1/2) TC7SH08FU (TE85RSOYJF)
IC401 (2/2) TC7SH08FU (TE85RSOYJF)
IC404 (2/2) TC7SZ125FU (TE85R)
IC404 (1/2) TC7SZ125FU (TE85R)
IC407 74VHC245MTCX
TP401
RET_74M
RE-CLK74
RB401 100
RB402 100
RB403 100
RB404 100
RB405 100
RB413 100
RB406 100
RB407 47
RX-CoPRO-XIRQ-out
700Protc-RX (rCCU -out
Audio IR00 -1/2-out
Audio IR00 -3/4-out
Audio IR00 -5/6-out
Audio IR00 -7/8-out
RET F
RET V
RET H
RET ERR
RET LOCK
SDI LOCK
SDI SD/HD
VBS NOSIG
VBS NTSC/PAL
AU-64FS
AU-LRCK

# COMMAND DEMUX PROMPTER DECODE



EXT HD/SD-SDI INPUT

EXT VIDEO IN

IC601 NM GS1524-CKDE3

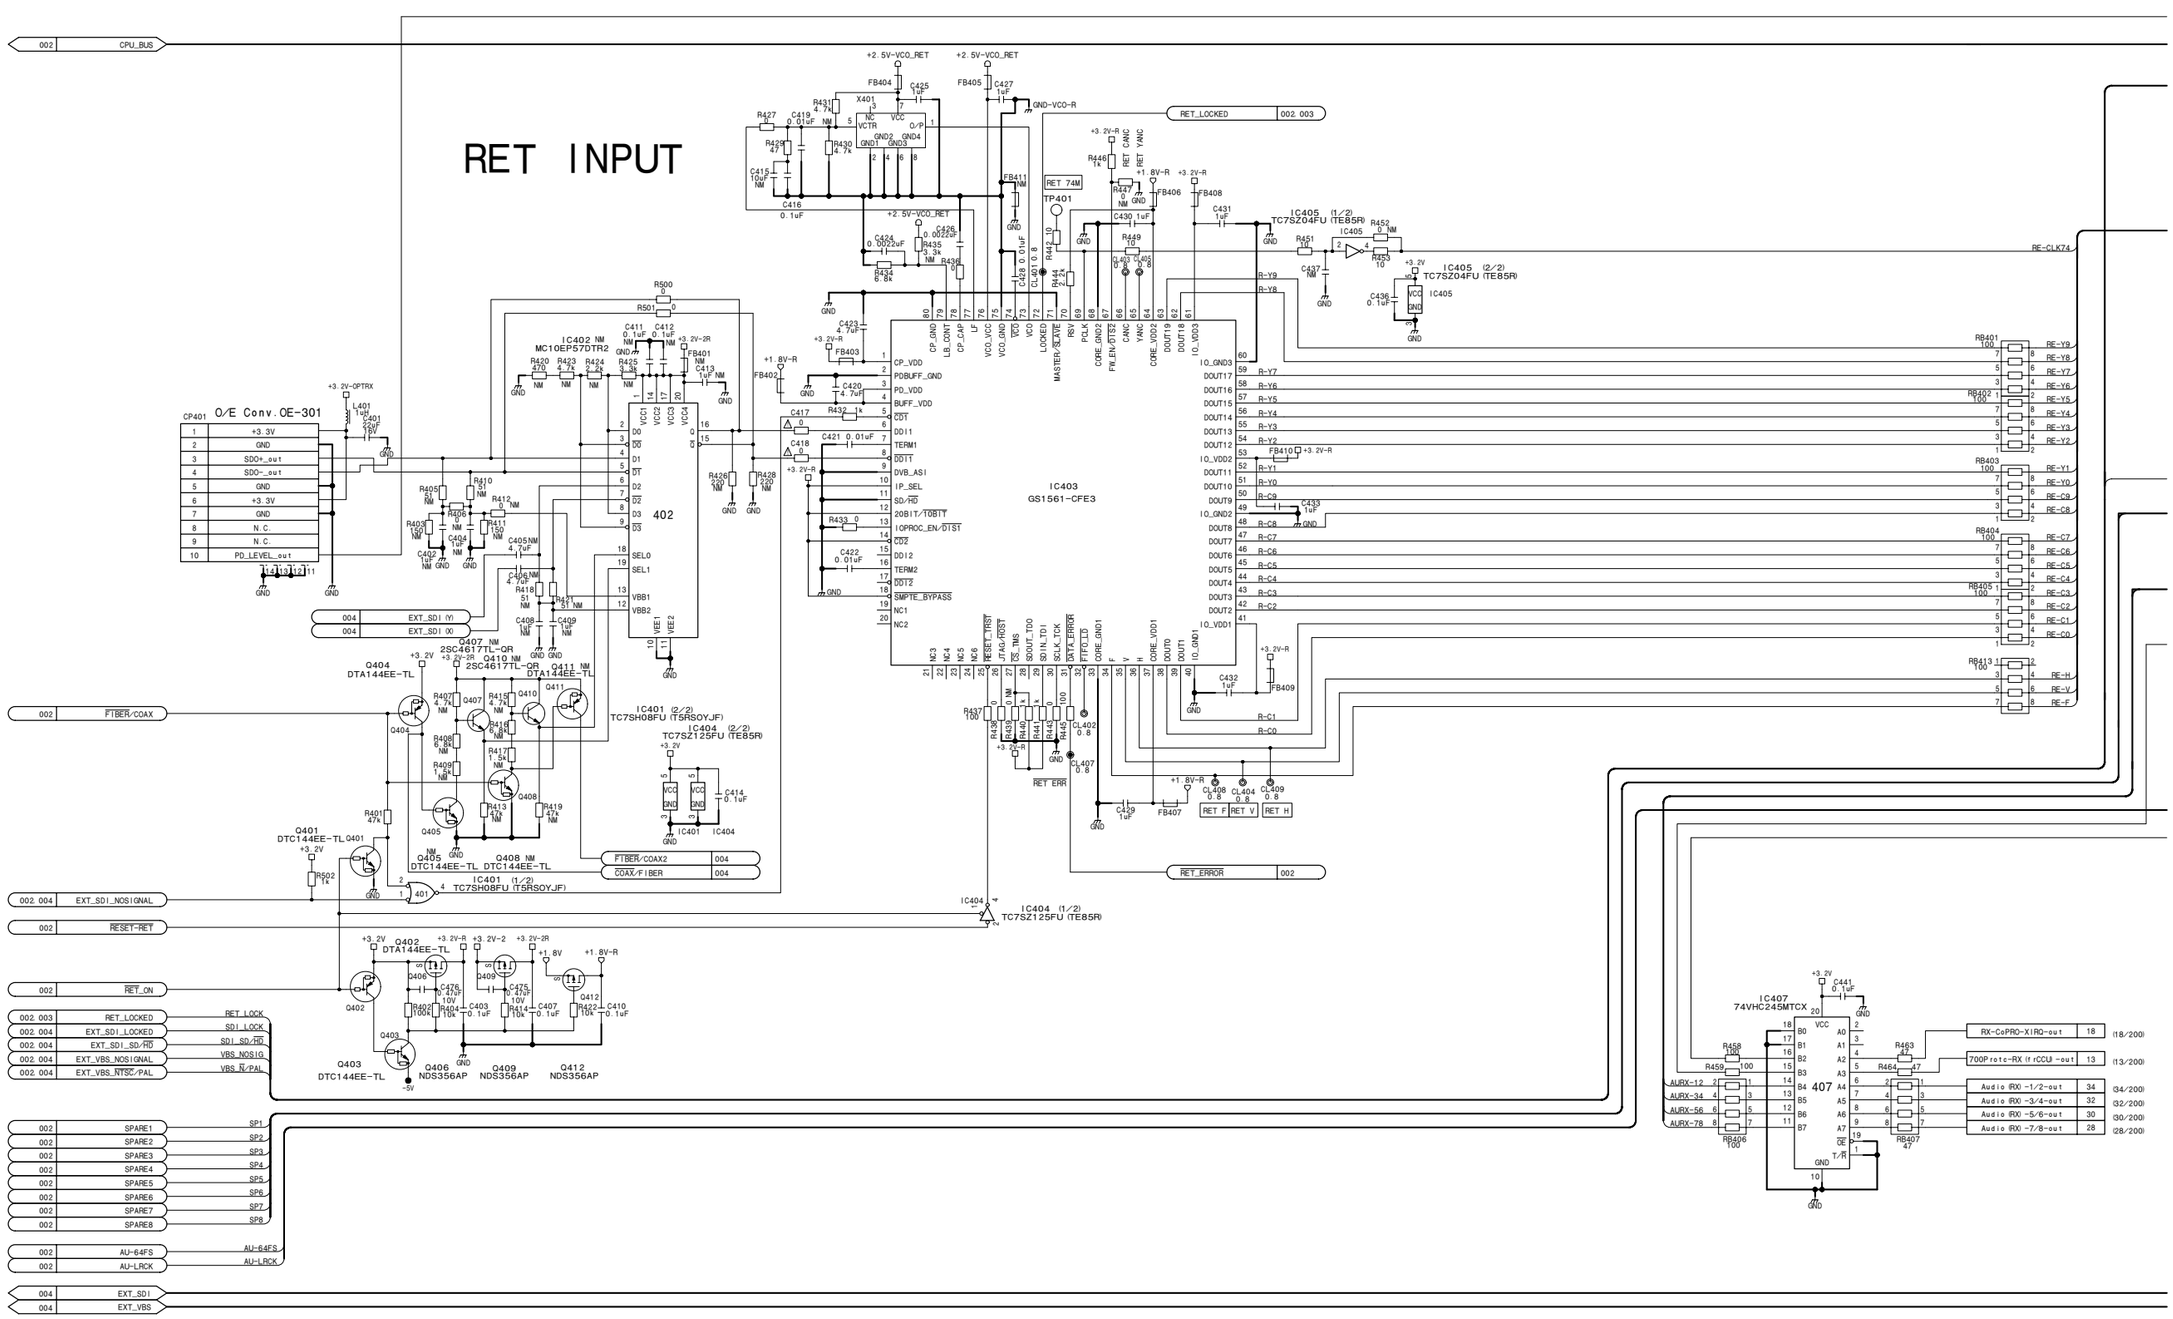IC603 NM MC100LVEL11DTR2

601

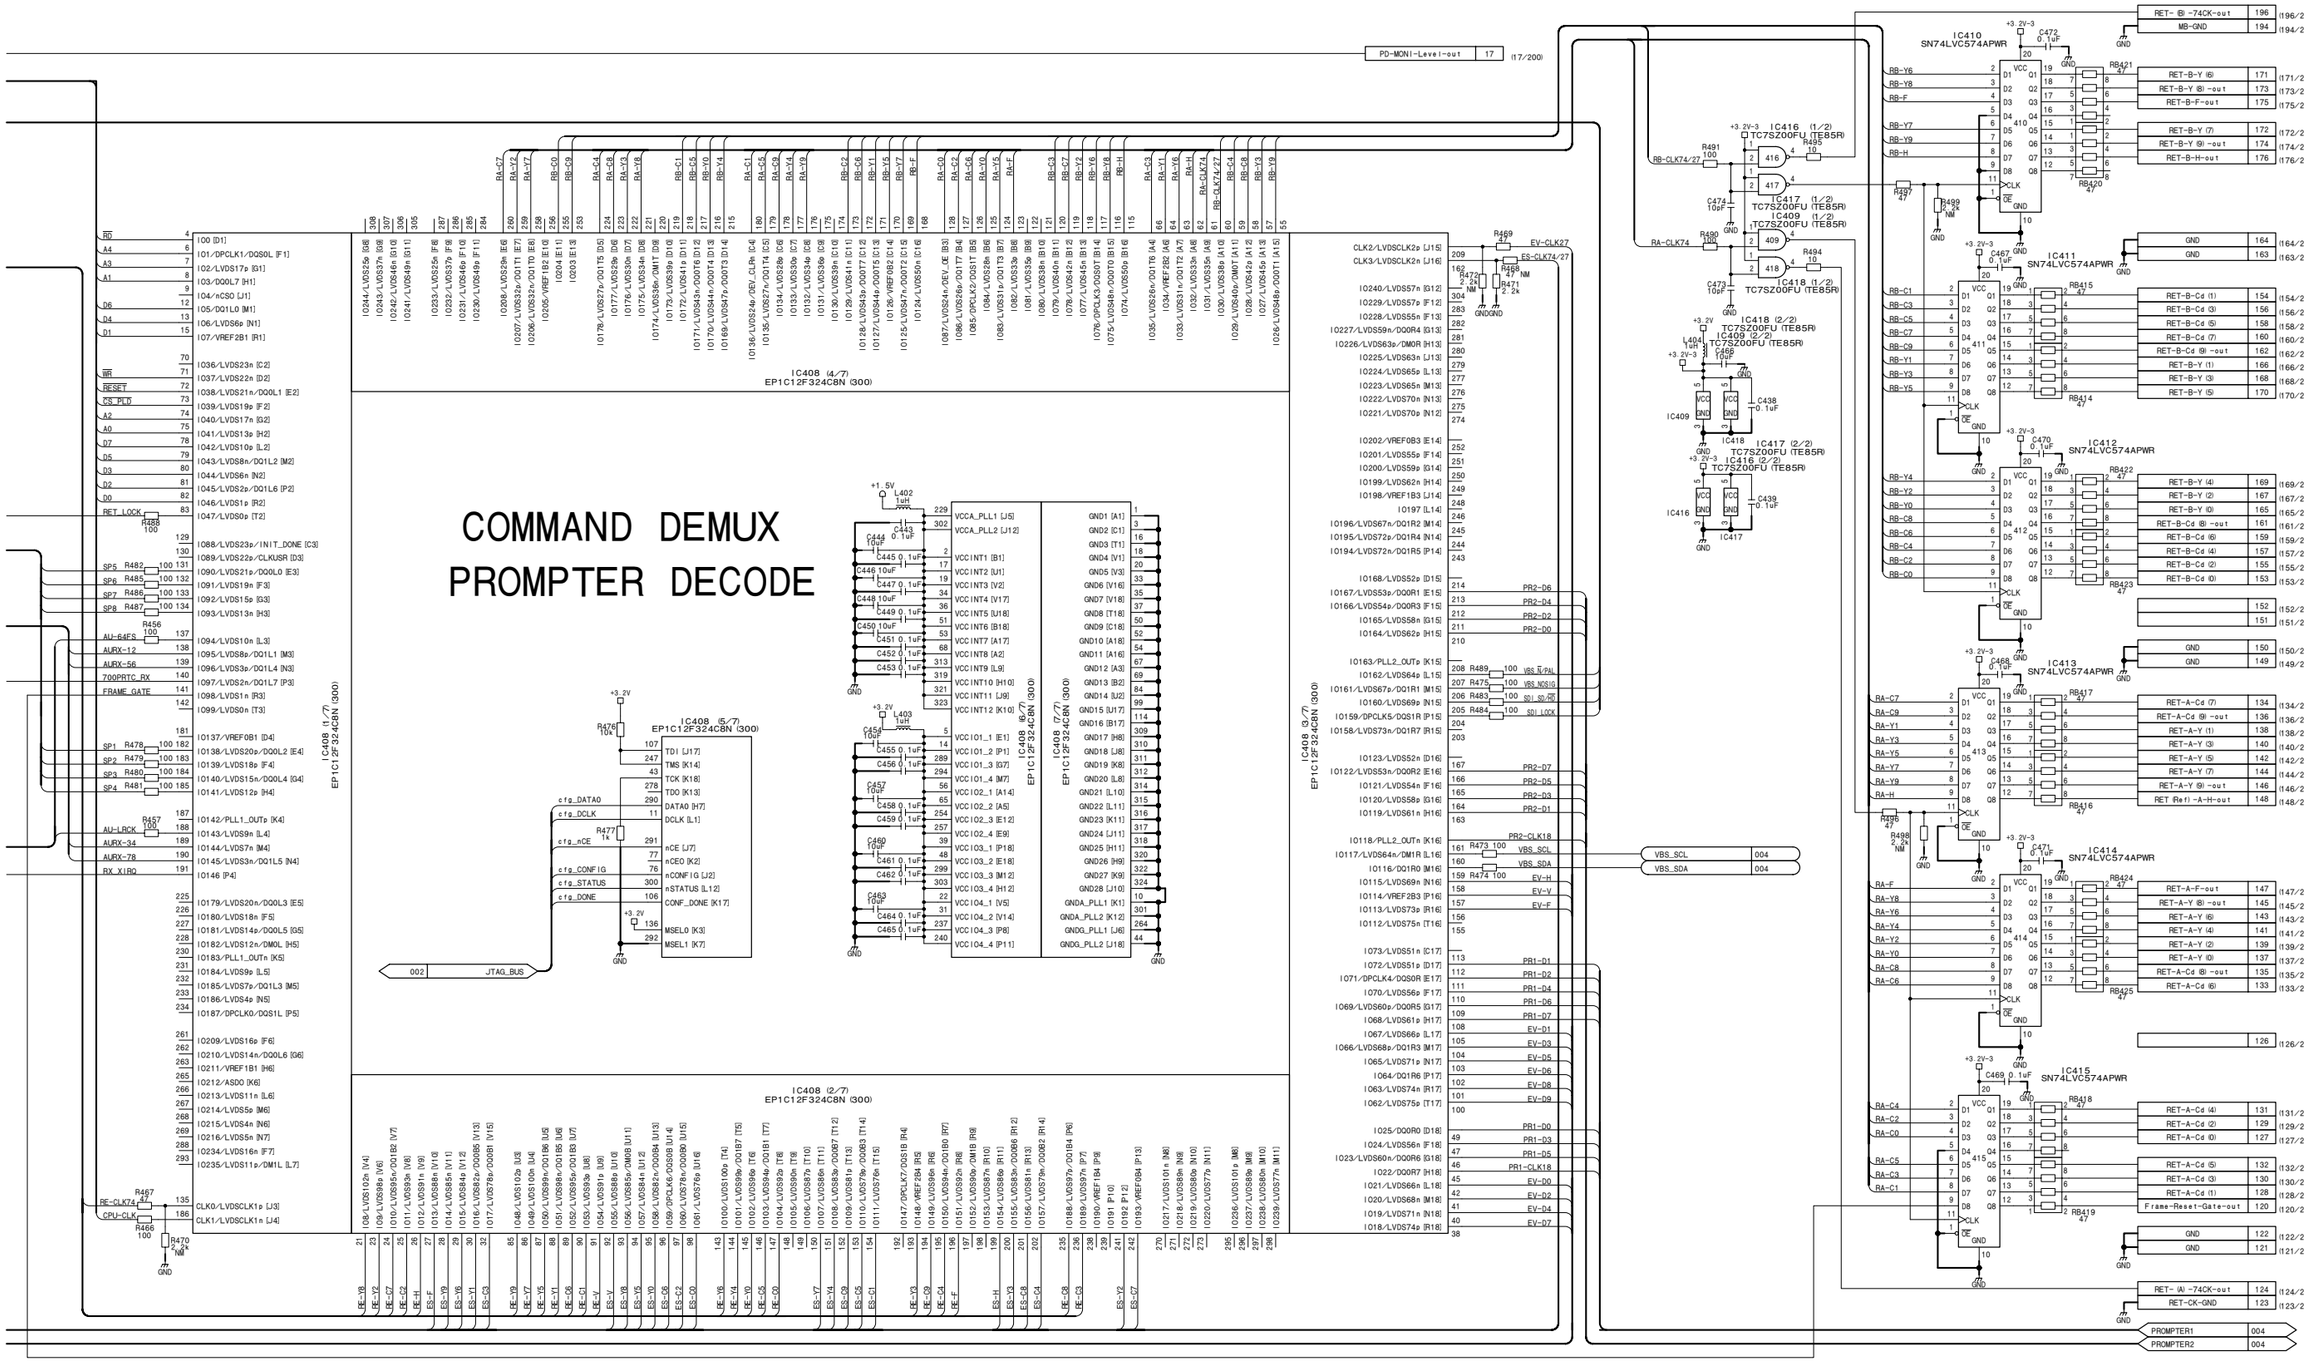IC602 (1/2) NM TC7SZ125FU (TE85R)

IC602 (2/2) NM TC7SZ125FU (TE85R)

IC604 (1/2) NM TC7SH00FU (T5RSOYJF)

IC604 (2/2) NM TC7SH00FU (T5RSOYJF)

IC605 NM GS1561-CFE3

IC606 (1/2) NM TC7SZ125FU (TE85R)

IC606 (2/2) NM TC7SZ125FU (TE85R)

IC607 (2/2) NM TC7SZ04FU (TE85R)

IC607 (1/2) NM TC7SZ04FU (TE85R)

IC701 (1/2) NM TC7SH00FU (T5RSOYJF)

IC701 (2/2) NM TC7SH00FU (T5RSOYJF)

Q601 NM 2SC5245-4/5-TL-E

Q602 NM 2SC5245-4/5-TL-E

Q603 NM 2SC4617TL-QR

Q604 NM 2SA1774TL-QR

Q605 NM 2SC4617TL-QR

Q606 NM 2SC4617TL-QR

Q607 NM DTA144EE-TL

Q608 NM DTC144EE-TL

Q609 NM NDS356AP

Q610 NM DTA144EE-TL

Q611 NM DTC144EE-TL

Q612 NM NDS356AP

Q613 NM NDS356AP

Q614 NM NDS356AP

Q617 NM NDS356AP

| | |
|---|---|
| 003 | FIBER/COAX2 |
| 003 | COAX/FIBER |
| 002 | EXT_EQ/EXT_VBS |
| 002 | EXT_SDI_ON |
| 002 | RESET-EXT |
| 003 | VBS_SCL |
| 003 | VBS_SDA |
| 195 (195/200) | RET-27M-CK-in |
| 193 (193/200) | MB-GND |
| 003 | PROMPTER1 |
| 003 | PROMPTER2 |

EXT_SDI (Y) 003
EXT_SDI (C) 003

SDI LOCKED

SDI 74M-27M

SDI CAMC

SDI YAMC

SDI ERR

ES-CLK74/27

ES-Y7 ES-Y6 ES-Y5 ES-Y4 ES-Y3 ES-Y2 ES-Y1 ES-Y0

ES-C9 ES-C8 ES-C7 ES-C6 ES-C5 ES-C4 ES-C3 ES-C2

ES-C1 ES-C0

ES-H ES-V ES-F

SDI H SDI V SDI F

**SDI-84C (4/4)**
**SUFFIX: -13, 14**

EXT_SDI_NOSIGNAL 002, 003
EXT_SDI_ERROR 002
EXT_SDI_SD/HD 002, 003
EXT_SDI_LOCKED 002, 003
EXT_SDI 003
EXT_VBS_NTSC/PAL 002, 003
EXT_VBS 003
EXT_VBS_NOSIGNAL 002, 003

EXT VBS INPUT

IC704 NM
ML86V7666TBZ03A

IC702 (1/3) NM NJM062V (TE2)
IC702 (2/3) NM NJM062V (TE2)
IC702 (3/3) NM 1SS302-TE85L
IC703 (2/2) TC7SH00FU (TSRSOYJF)
IC703 (1/2) TC7SH00FU (T5RSOYJF)

PROMPTER1 OUTPUT

IC801 CXD1171M-TH
IC802 AD8014ARTZ-REEL7
PROMPTER1 TP801
Prompter (X) -out 12 (12/20)
Prompter (Y) -out 14 (14/20)

PROMPTER2 OUTPUT

IC851 NM CXD1171M-TH
IC852 NM AD8014ARTZ-REEL7
PROMPTER2 TP851 NM
PROMPTER2 OUT CN851

# SDI-84, 84C (1/4)
SUFFIX: -15

# SDI-84, 84C (1/4)
SUFFIX: -15






# SDI-84, 84C (1/4)
BOARD NO. 1-865-930-15
HDC-1500_SDI-84_015_1

**SDI-84, 84C (2/4)**
**SUFFIX: -15**


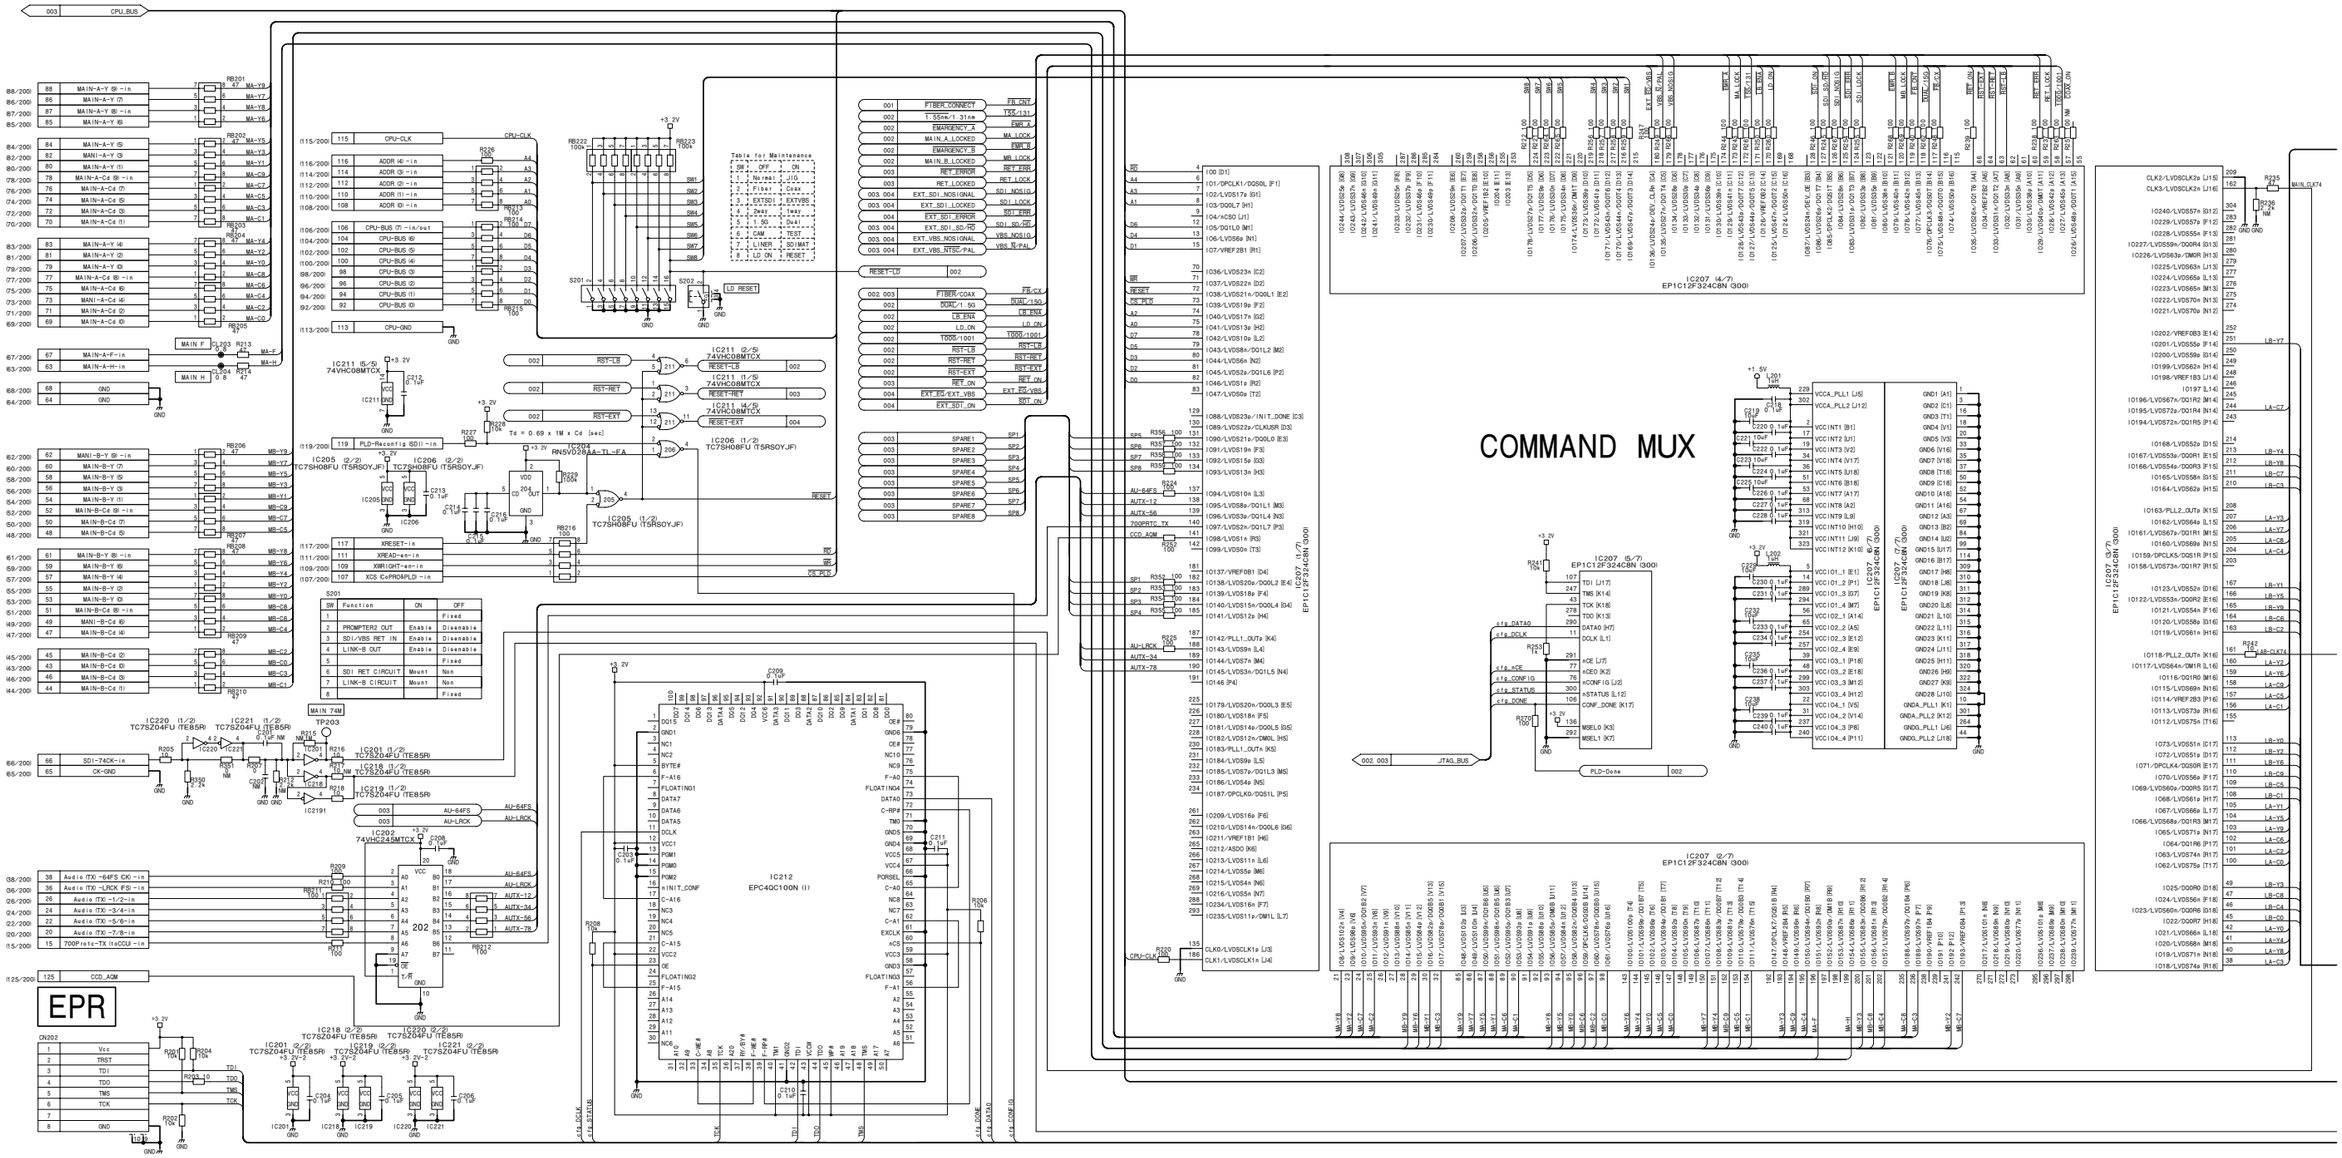

**SDI-84, 84C (2/4)**
**SUFFIX: -15**

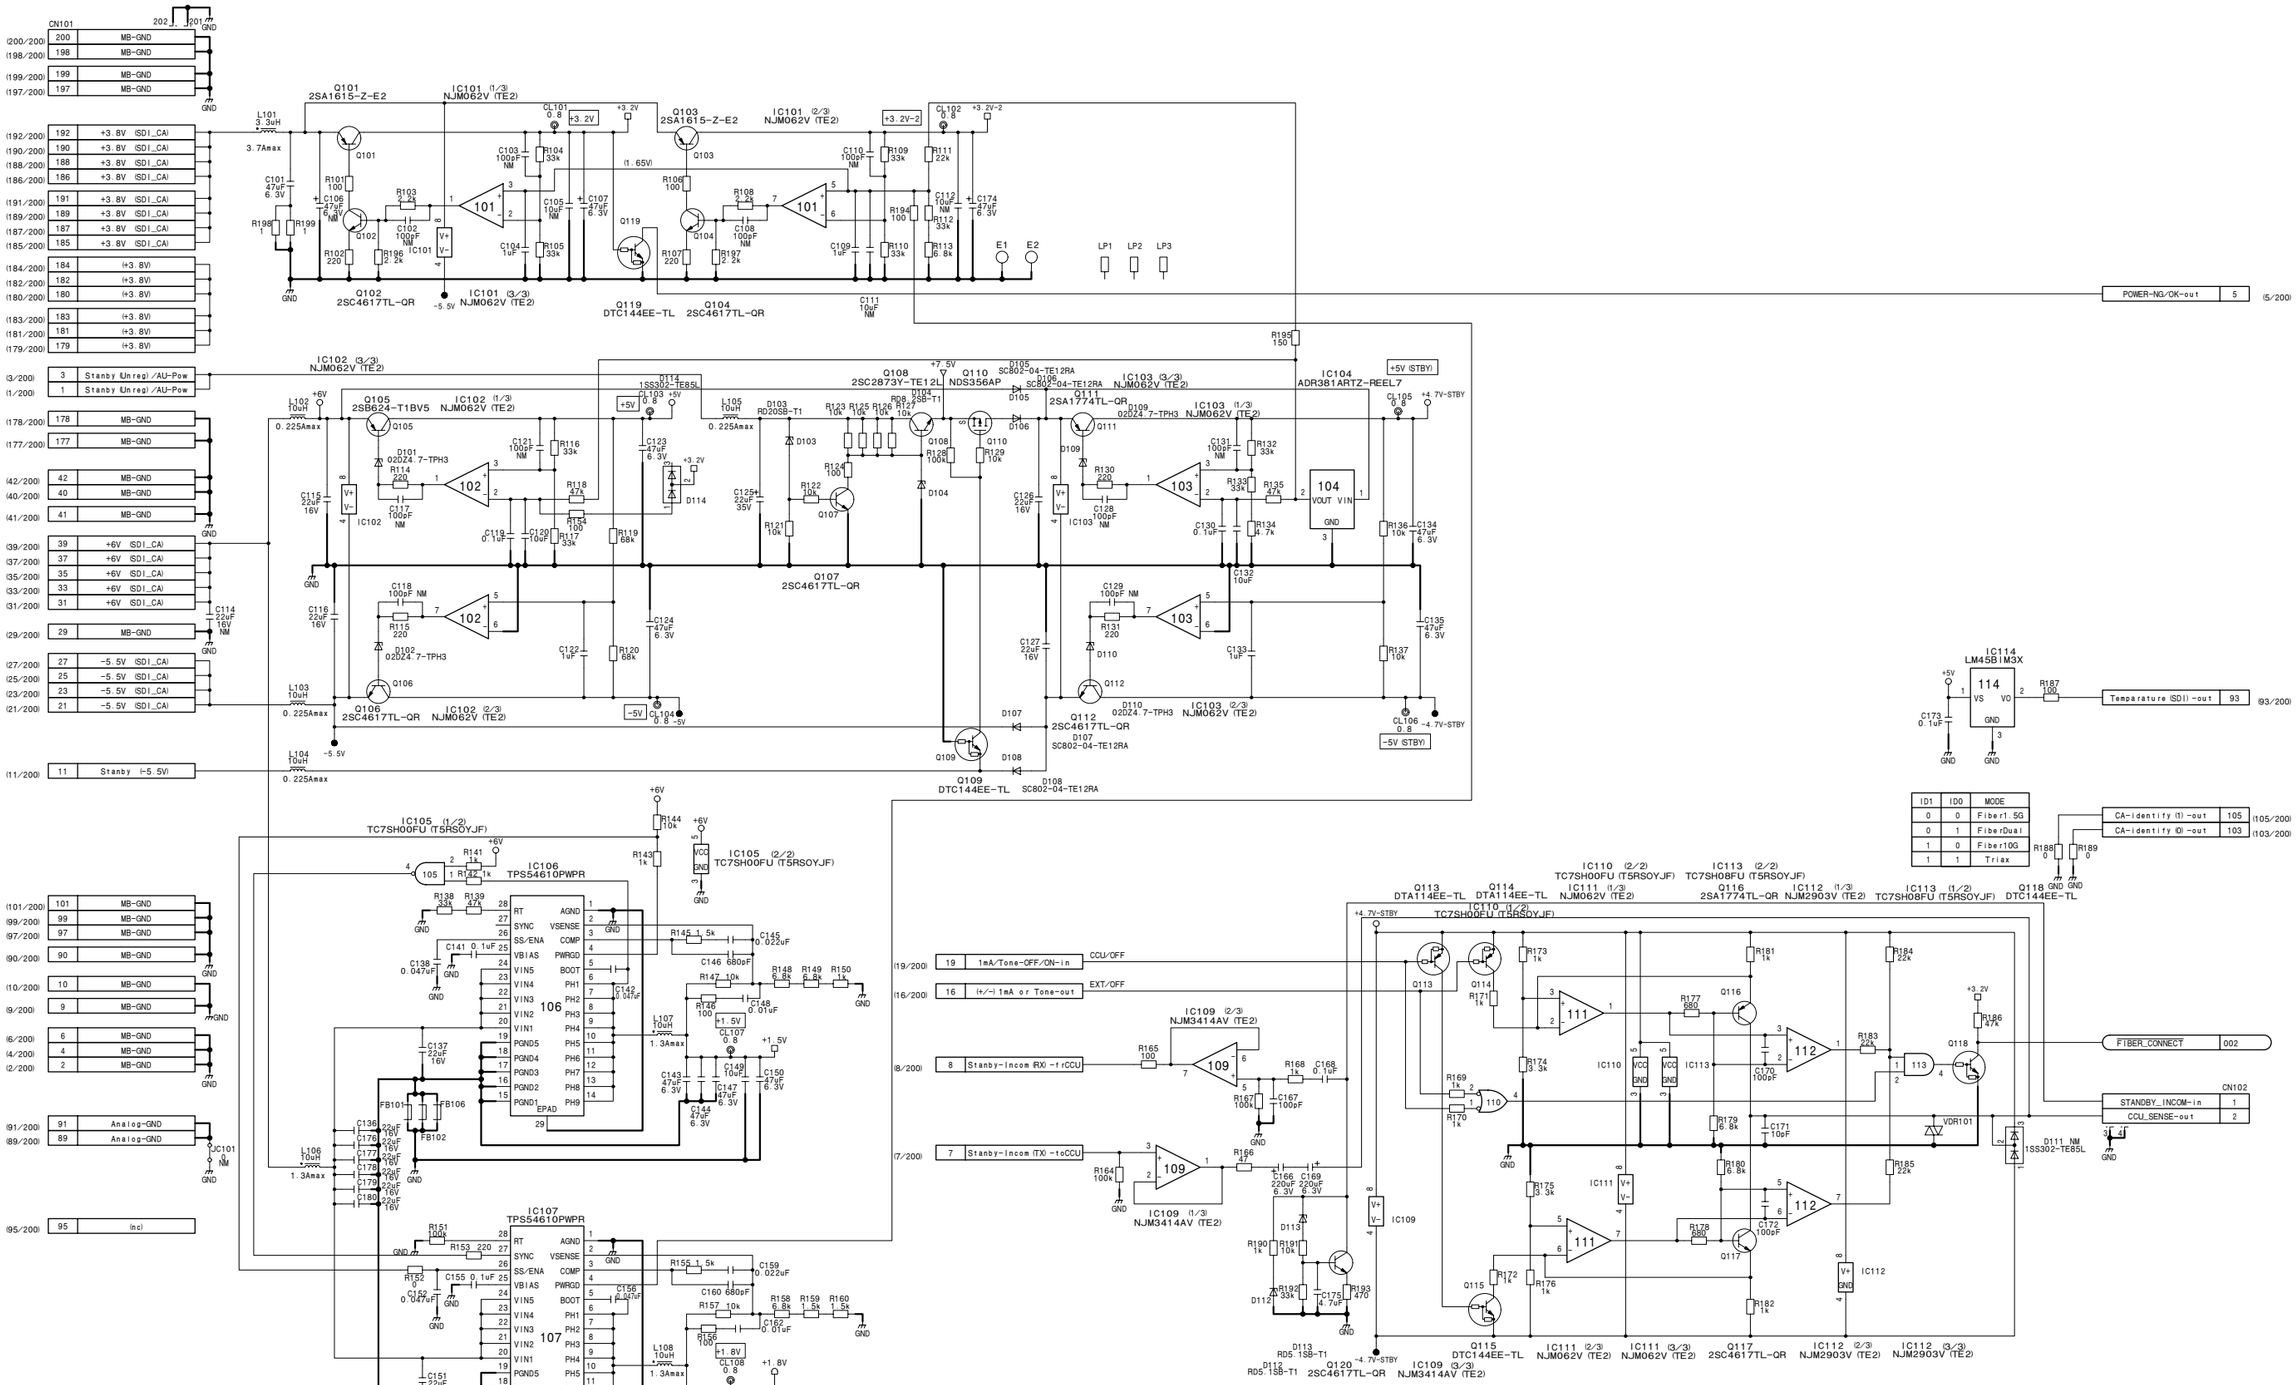


**SDI-84, 84C (2/4)**

BOARD NO. 1-865-930-15

HDC-1500_SDI-84_015_2

**SDI-84, 84C (3/4)**
**SUFFIX: -15**
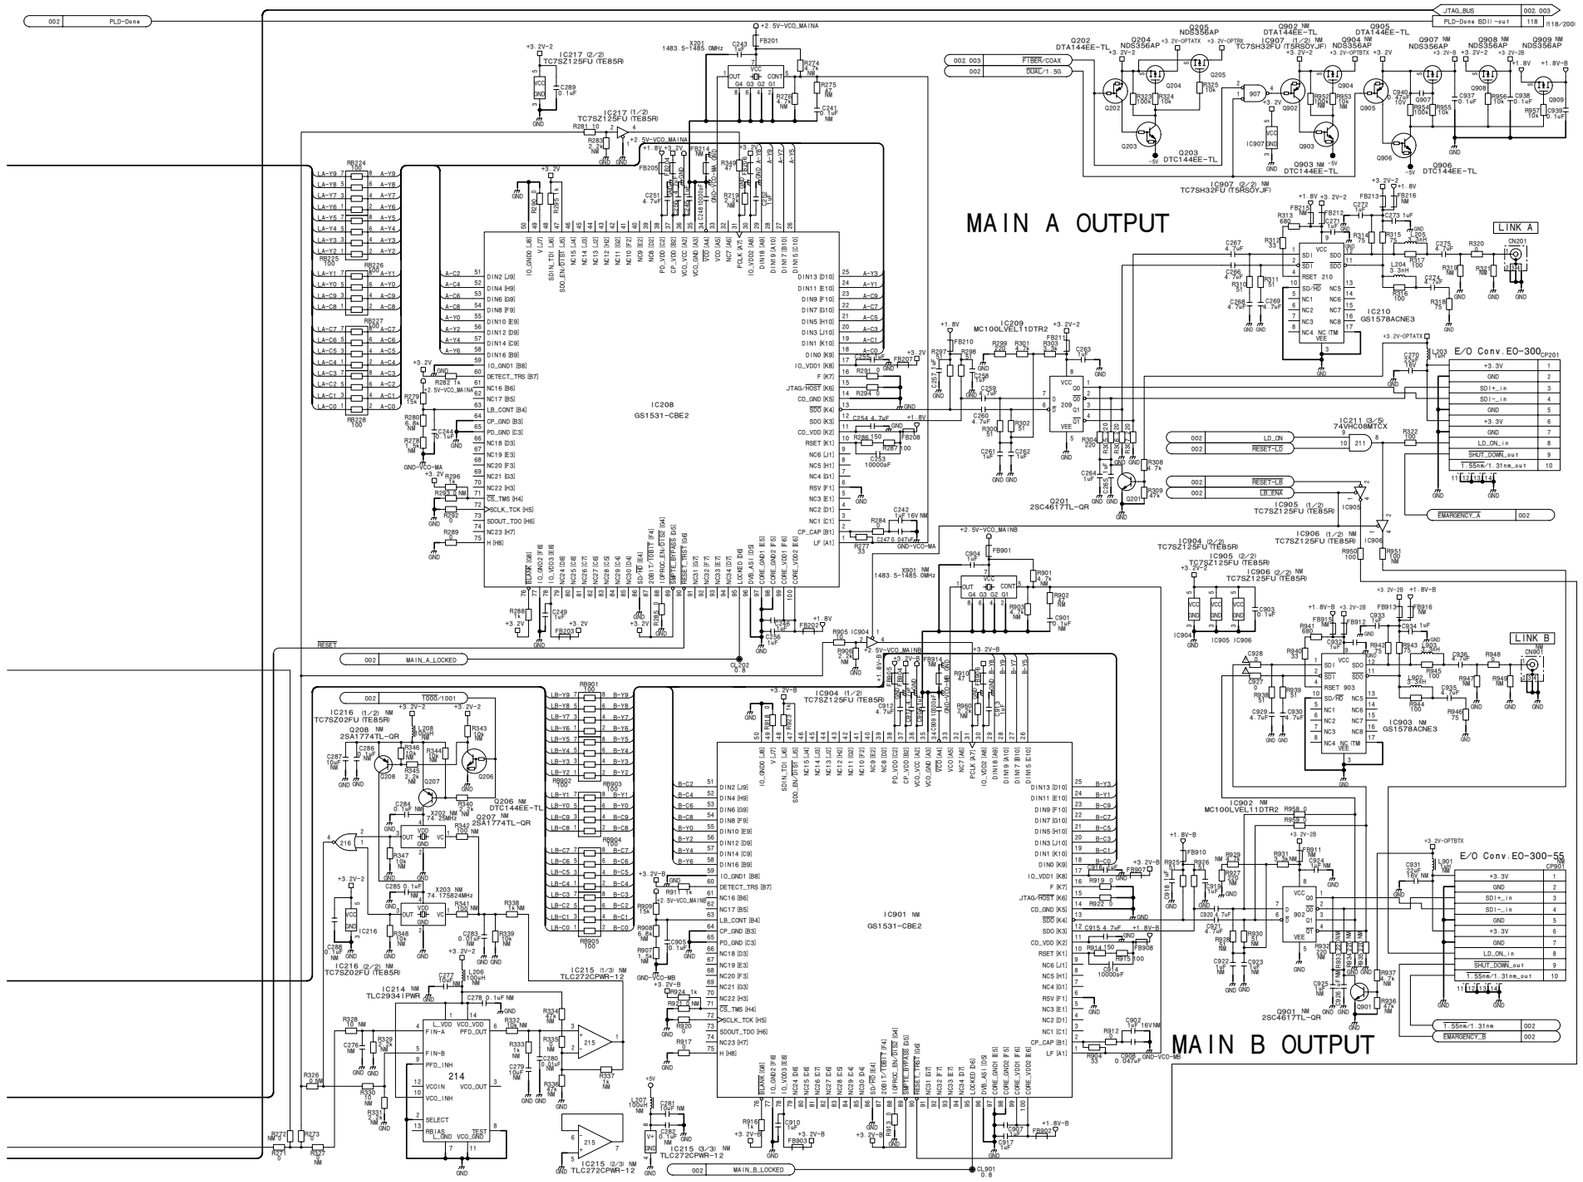
# RET INPUT


4-106 (a)

# COMMAND DEMUX
# PROMPTER DECODE




**SDI-84, 84C (3/4)**
BOARD NO. 1-865-930-15
HDC-1500_SDI-84_015_3

SDI-84, 84C (4/4)
SUFFIX: -15

EXT HD/SD-SDI INPUT

EXT VIDEO IN

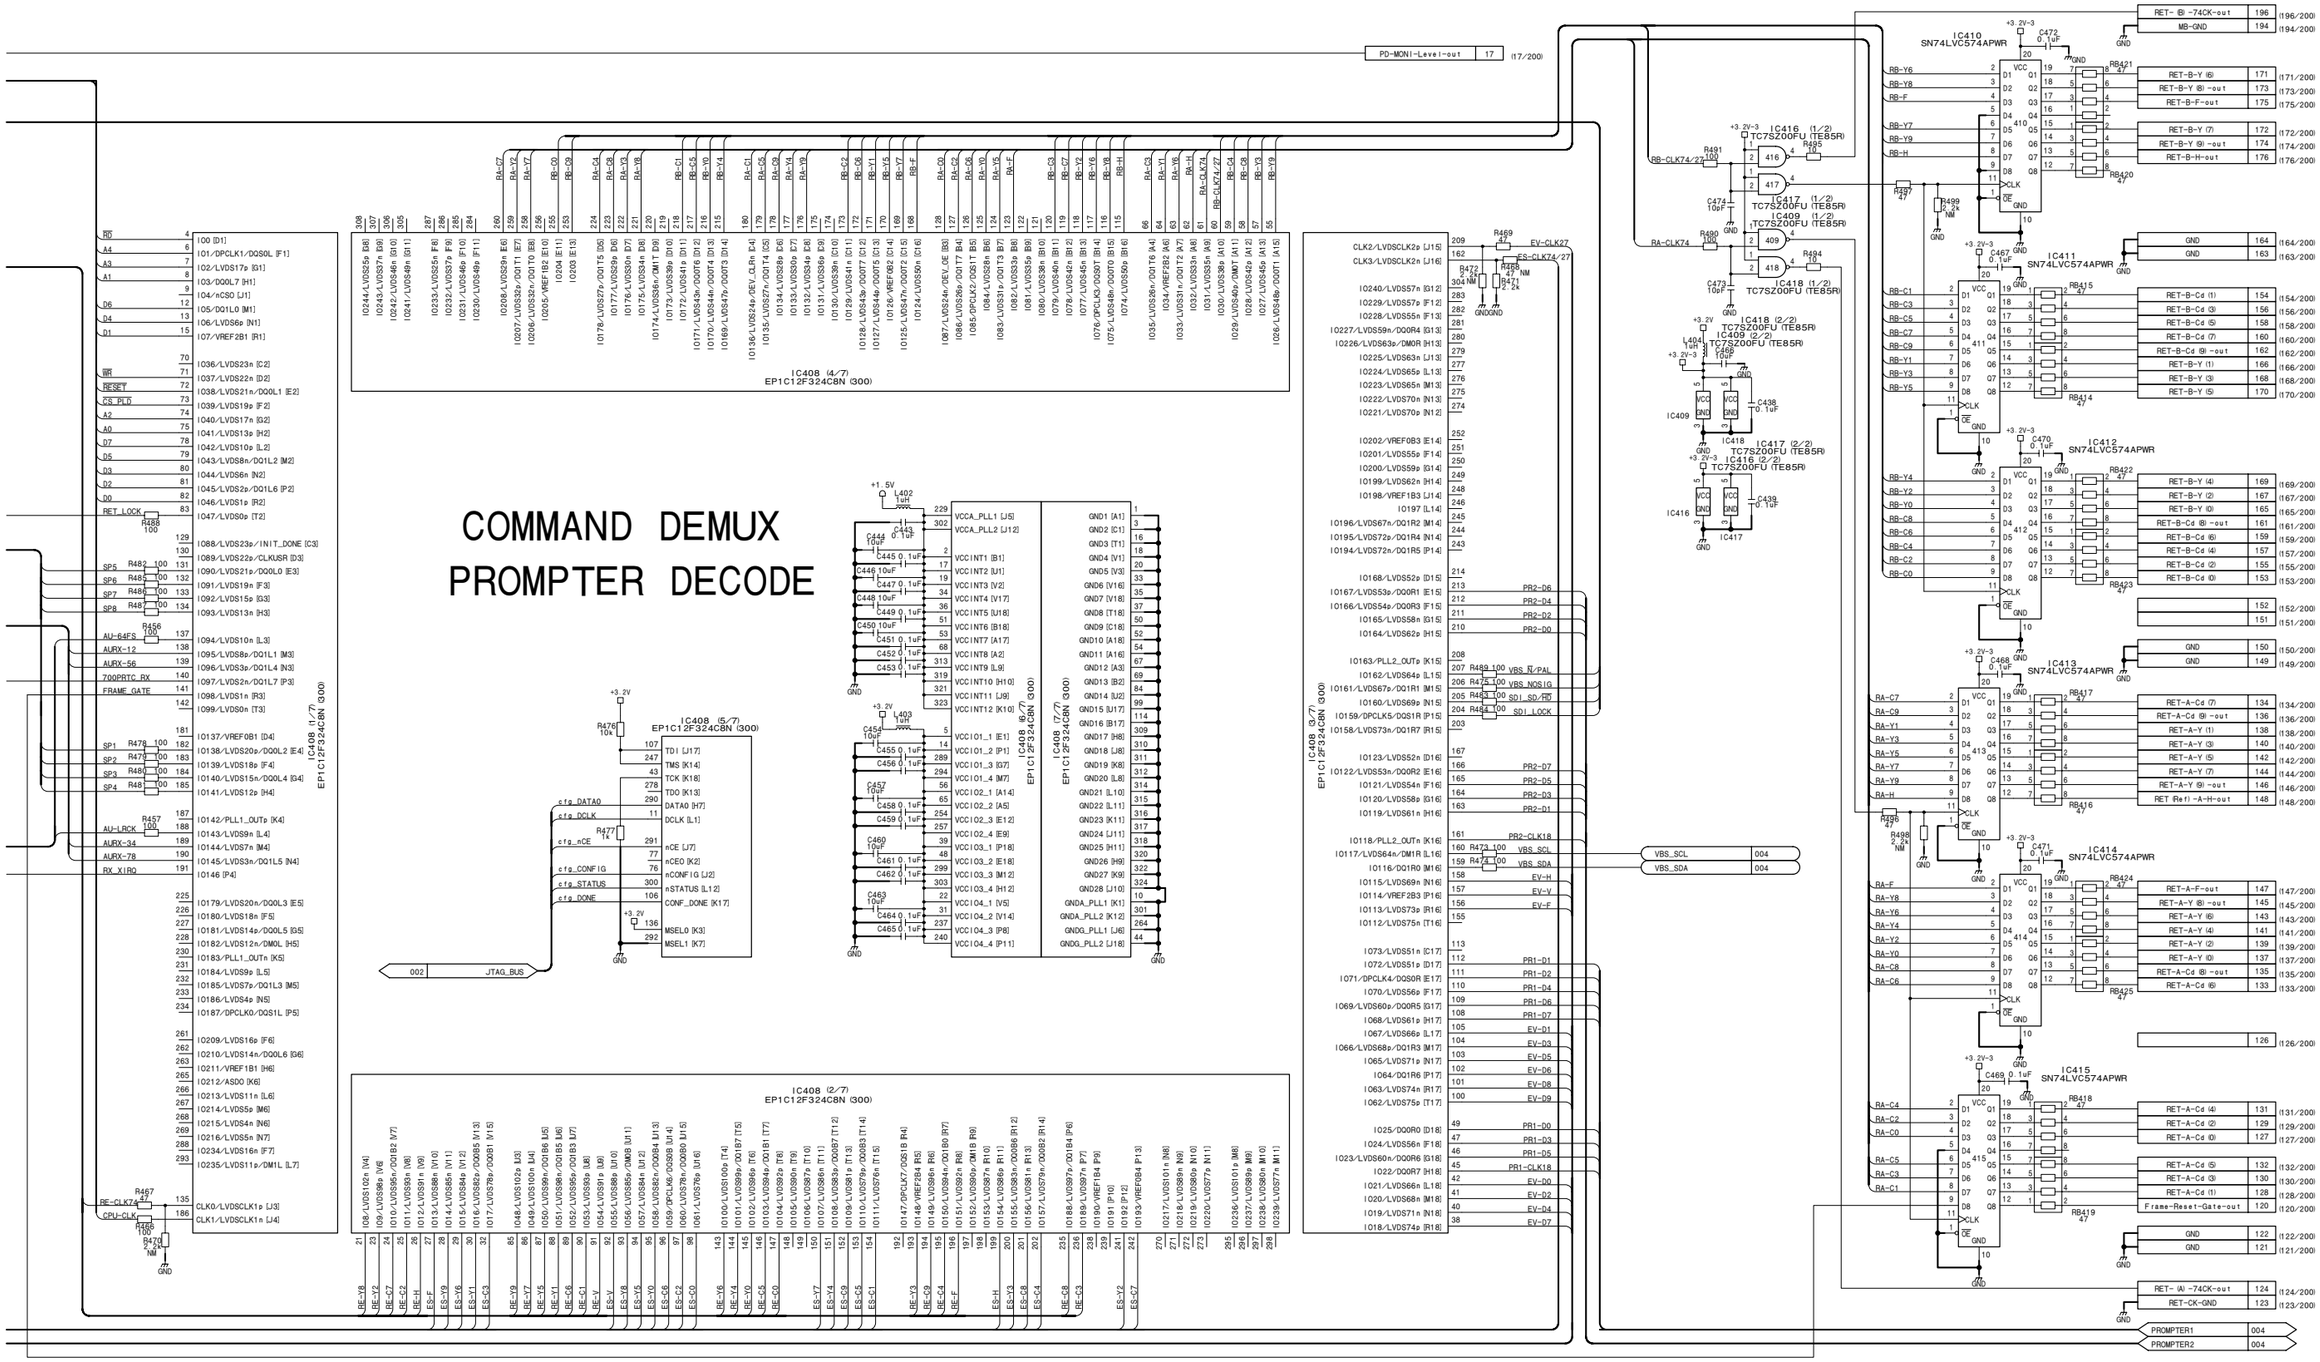
4-108 (a)

**SDI-84, 84C (4/4)**
**SUFFIX: -15**

EXT_SDI_NOSIGNAL 002. 003
EXT_SDI_ERROR 002
EXT_SDI_SD/HD 002. 003
EXT_SDI_LOCKED 002. 003
EXT_SDI 003
EXT_VBS_NTSC/PAL 002. 003
EXT_VBS 003
EXT_VBS_NOSIGNAL 002. 003

EXT VBS INPUT

IC704 ML86V7666TBZ03A

IC703 (1/2) TC7SH00FU (TE85RSOYJF)

IC703 (2/2) TC7SH00FU (TE85RSOYJF)

IC702 (1/3) NJM062V (TE2)

IC702 (2/3) NJM062V (TE2)

IC702 (3/3) NJM062V (TE2)

IC801 CXD1171M-TH

IC802 AD8014ARTZ-REEL7

PROMPTER1 OUTPUT

IC851 CXD1171M-TH

IC852 AD8014ARTZ-REEL7

PROMPTER2 OUTPUT

Prompter 00 -out 12 (12/2008)
Prompter 01 -out 14 (14/2008)


CN1 J6491
GND
Standby_-5.5V-in
VF-DTL-out
LED00
LED01
LED02
LED03
LED04
LED05
LED06
LED07
SW-SCAN0
SW-SCAN1
SW-SCAN2
SW-SCAN3
SW-SCAN4
SW-SCAN5
SW-SCAN6
SW-DATA0-out
SW-DATA1-out
SW-DATA2-out
SW-DATA3-out
SW-DATA4-out
SW-DATA5-out
SW-DATA6-out
SW-DATA7-out
+3.8V
C10 10uF
CN2 J6491
LED-LD0-in
LED-LD1-in
LED-LD2-in
LED-LD3-in
LED-LD4-in
LED-LD5-in
LED-LD6-in
LED-LD7-in
LED-NO-R0-in
LED-NO-R1-in
LED-NO-R2-in
LED-NO-R3-in
LED-NO-R4-in
LED-NO-R5-in
LED-NO-R6-in
LED-NO-R7-in
LED-NO-G0-in
LED-NO-G1-in
LED-NO-G2-in
LED-NO-G3-in
LED-NO-G4-in
LED-NO-G5-in
LED-NO-G6-in
LED-NO-G7-in
RE1-out
RE2-out
CUR-H-out
CUR-Width-out
CUR-V-out
CUR-Height-out
D1 HSMS8WK-TL
D2 HSMS8WA-TL
D3 CL-165HR/G1-D-T
RED
GREEN
R1 470
R4 100
R5 220
R6 330
+3.0V
EN1
ROTARY_ENCODER
R2 0 NM
R3 0
GND-3
D12 1SS300-TE85L
D13 1SS300-TE85L
D14 1SS300-TE85L
D15 1SS300-TE85L
D16 1SS300-TE85L
SWIN0
SWIN1
SWIN2
SWIN3
SWIN4
SWIN5
SWIN6
SWIN7
ND
CC
S1
S2
SW-SCAN0
SW-SCAN1
D4 1SS300-TE85L
D5 1SS300-TE85L
D6 1SS300-TE85L
D7 1SS300-TE85L
D8 1SS300-TE85L
D9 1SS300-TE85L
D10 1SS300-TE85L
D11 1SS300-TE85L
R7 0 NM
R8 NM
R9 NM
R10 NM
R11 0
R12 0
R13 0
R14 0
R15 0 NM
R16 0
R17 0 NM
R18 0
R19 0 NM
R20 0
R21 0 NM
R22 0
RET_SEL_1
RET_SEL_2
S3
S4
1SW-SCAN5
+3.0V-1
C1 10uF
C2 0.1uF
50k RV1
50k RV2
50k RV3
50k RV4
50k RV5
RV1_H_POSI
RV2_WIDTH
RV3_V_POSI
RV4_HEIGHT
RV5_VF_DTL
IC4 S-812C30AUA-C2KT2G
C7 0.1uF
C8 22uF
IC5 S-812C30AUA-C2KT2G
C11 0.1uF
C12 22uF
SUFFIX:13-ADDED
D17 1SS300-TE85L
D18 1SS300-TE85L
D19 1SS300-TE85L
D20 1SS300-TE85L
D21 1SS300-TE85L
D22 1SS300-TE85L
D23 1SS300-TE85L
D24 1SS300-TE85L
S5
S6
S7
S8
S9 MENU
S10
MARKER
MIX VF
UP_TALLY
VF_SCAN
DISPLAY
ENTER
CANCEL
R70 0 NM
4_3
16_9
R28 0 NM
R29 0
R30 0
R31 0
R32 0 NM
S26
S27
S28
RET_1
RET_2
RET_3
S29
S30
S31
R
G
B
D25 1SS300-TE85L
D26 1SS300-TE85L
D27 1SS300-TE85L
D29 1SS300-TE85L
D30 1SS300-TE85L
D31 1SS300-TE85L
D32 1SS300-TE85L
S11
S12
S13
S14
S15
STORE
C4 10uF
IC1 TC74VHC373FT (EL)
C3 0.1uF
R23 100
R24 100
R25 100
R26 100
R27 220
Q1 DTC114EE-TL
Q2 DTC114EE-TL
Q3 DTC114EE-TL
Q4 DTC114EE-TL
Q5 DTC114EE-TL
IC3 TC7WH04FU (TE12R)
C14 0.1uF
R37 100
R38 100
C0
C1
SW-SCAN4
IC2 TC74VHC373FT (EL)
C5 0.1uF
R34 220
R35 100
R36 100
Q6 DTC114EE-TL
Q7 DTC114EE-TL
Q8 DTC114EE-TL
SW-SCAN6
S20
S21
S22
S24
S25
CALL
FILTER_LOCAL
ASSINABLE
VF_DETAIL
SCREEN SIZE MARKER
R124 0
R125 0 NM
C6 10uF

**SW-1233**
**SUFFIX: -12, 13, 31**




**SW-1233**
BOARD NO. 1-867-455-12, 13, 31
HDC-1000_SW-1233_013_1

SW-1236, SW-1237
SUFFIX: -12, 31 SUFFIX: -13, 31

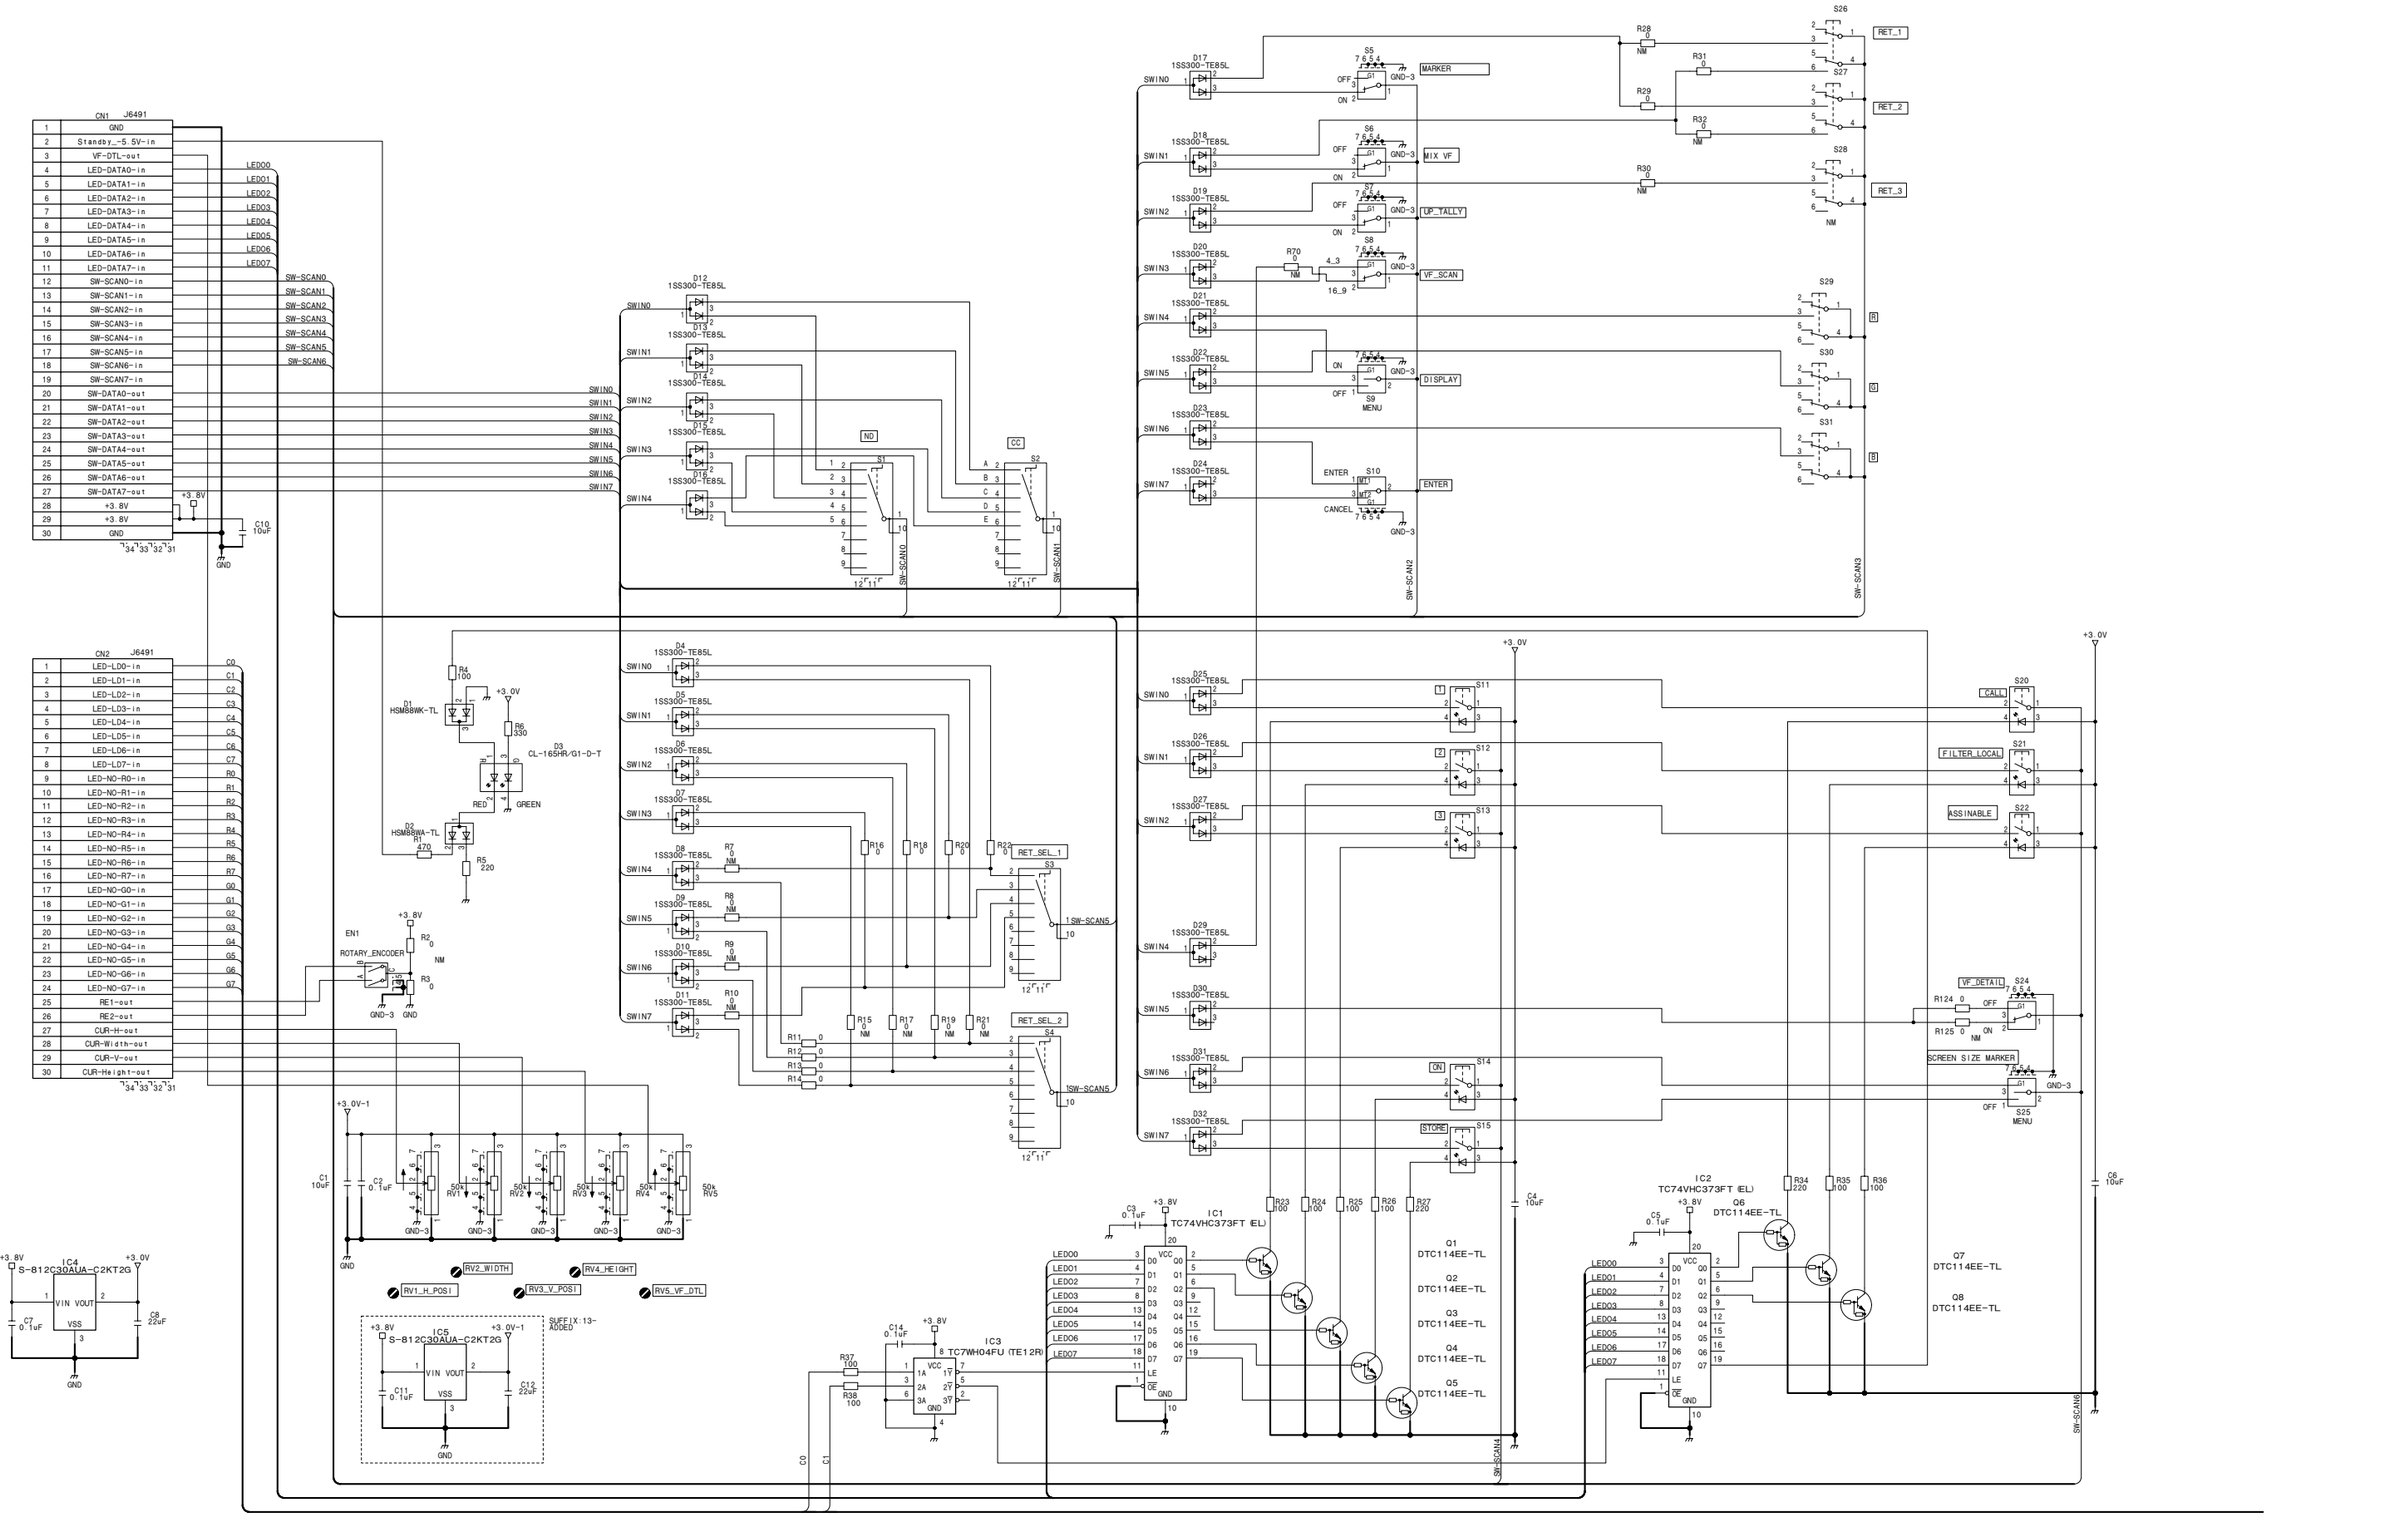


**SW-1236**

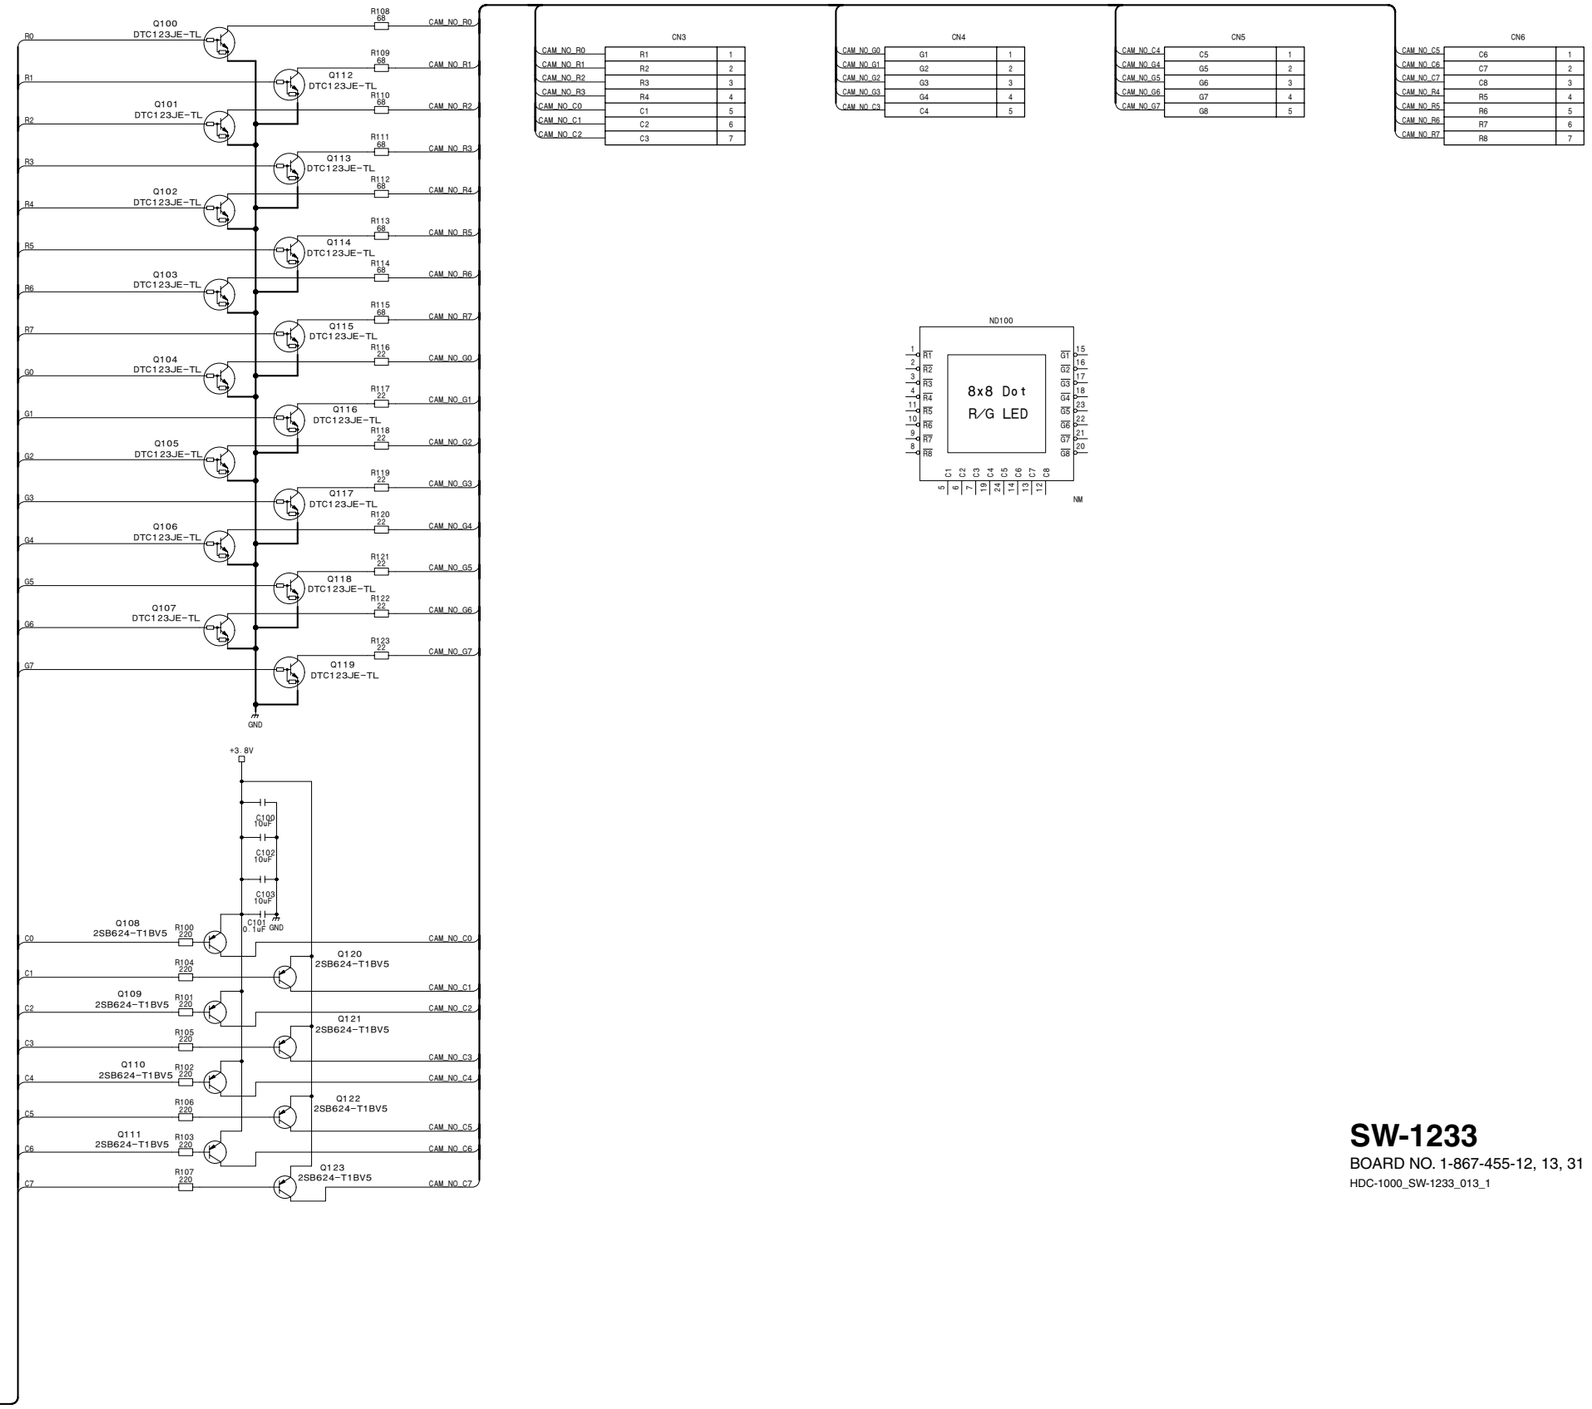BOARD NO. 1-865-947-12, 31

HDC-1500_SW-1236_001_1

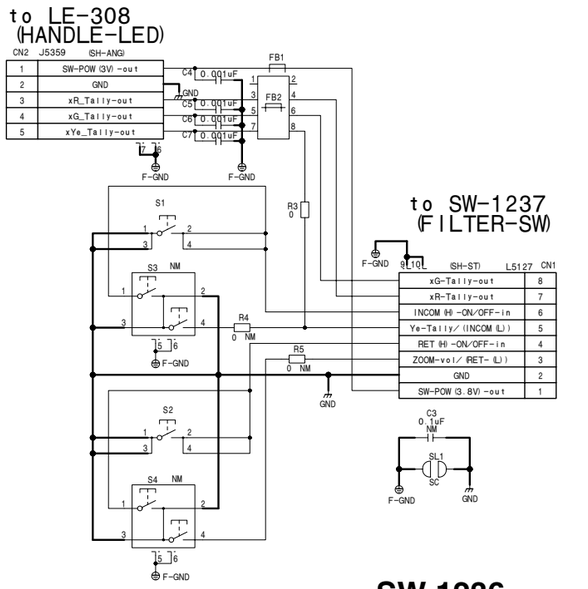


**SW-1237**

BOARD NO. 1-865-948-13, 31

HDC-1500_SW-1237_013_1

SW-1238, SW-1239, SW-1240
SUFFIX: -12, 31 SUFFIX: -12, 31 SUFFIX: -12, 13, 31

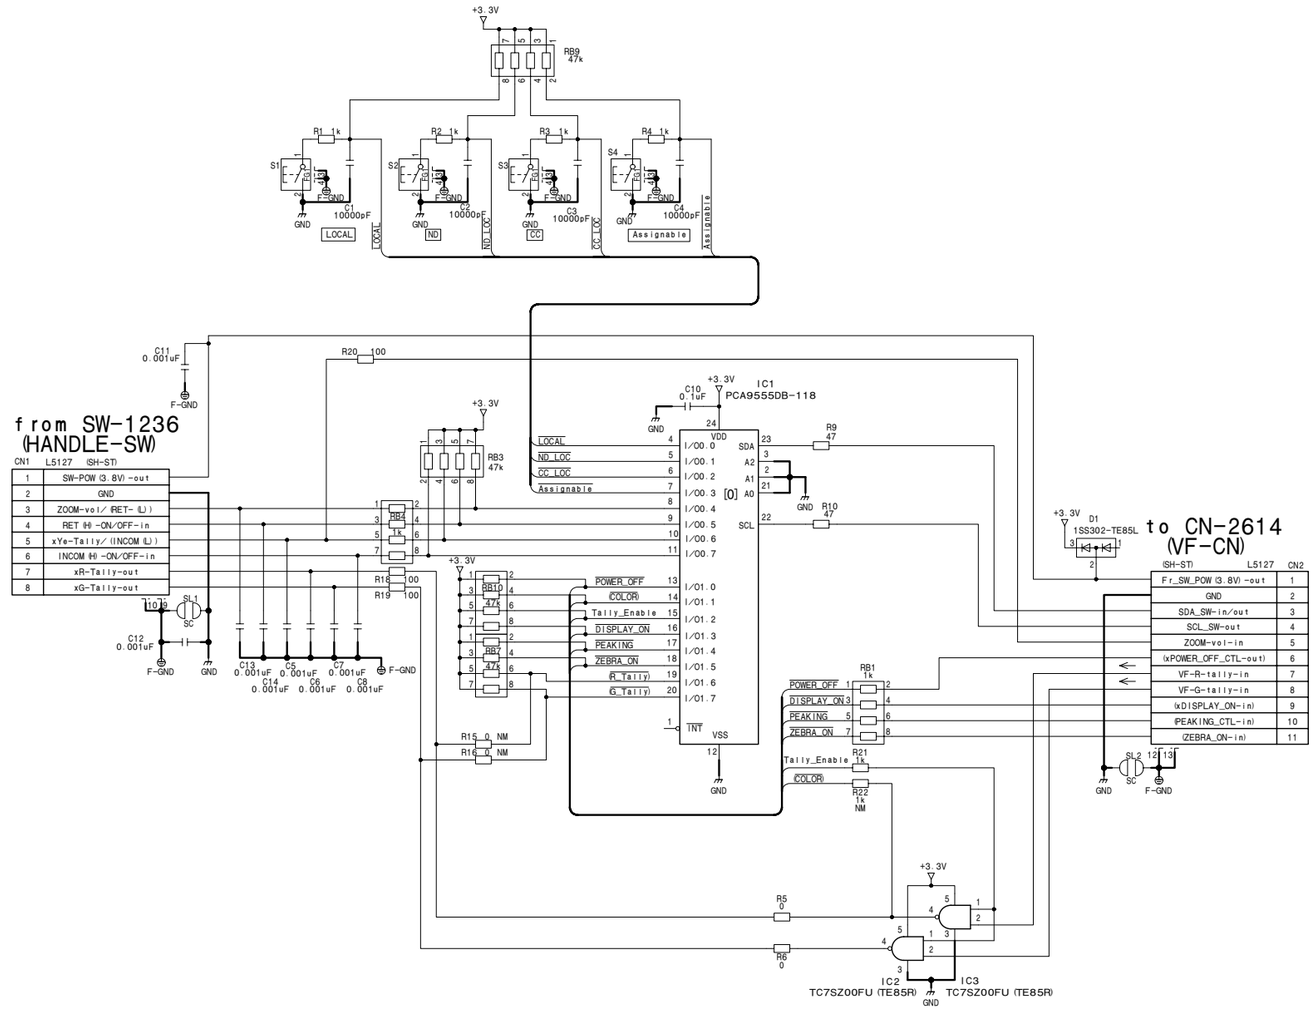


## SW-1238

BOARD NO. 1-865-949-12, 31

HDC-1500_SW-1238_001_1




## SW-1239

BOARD NO. 1-865-950-12, 31

HDC-1500_SW-1239_001_1

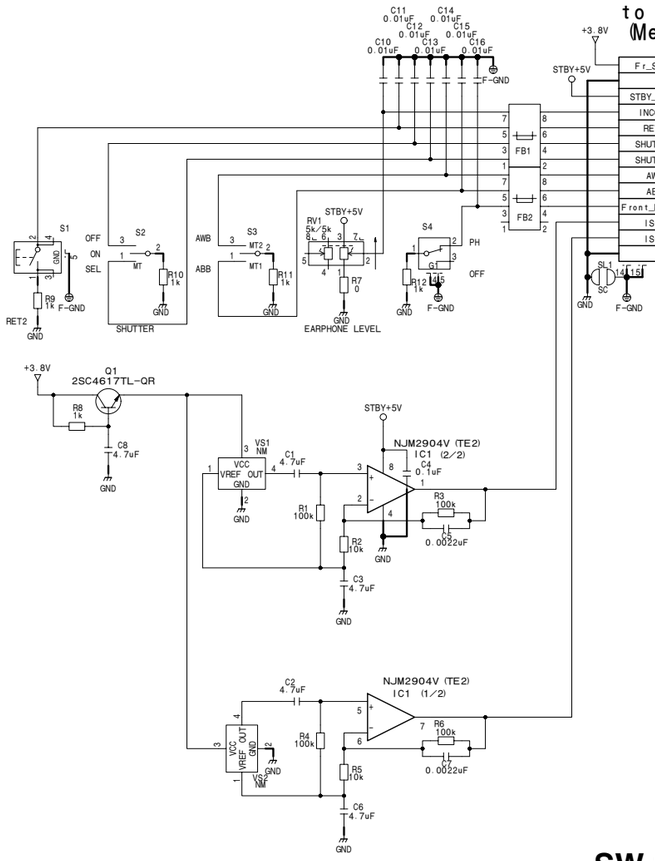


## SW-1240

BOARD NO. 1-865-951-12, 13, 31

HDC-1500_SW-1240_001_1

SW-1241/1241B, SW-1242, SW-1245
SUFFIX: -13 SUFFIX: -13, 31 SUFFIX: -13, 31

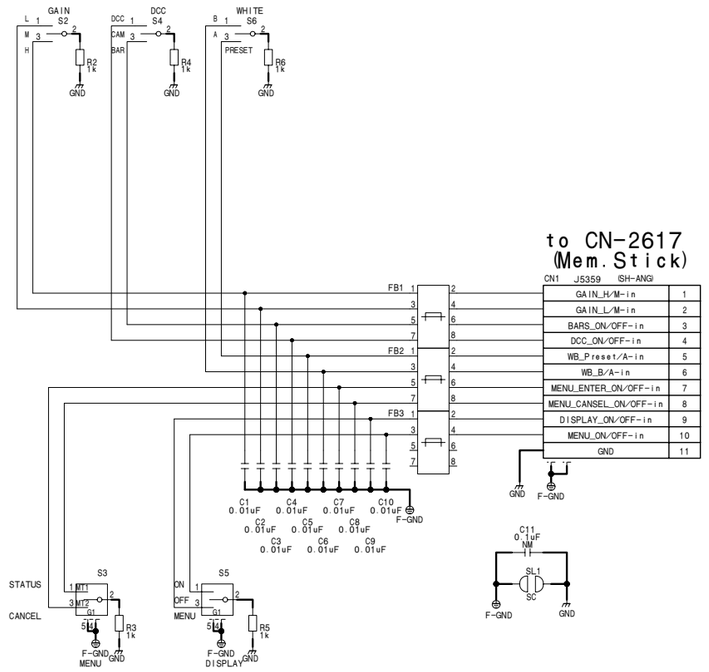





## SW-1242

BOARD NO. 1-865-953-13, 31

HDC-1500_SW-1242_001_1
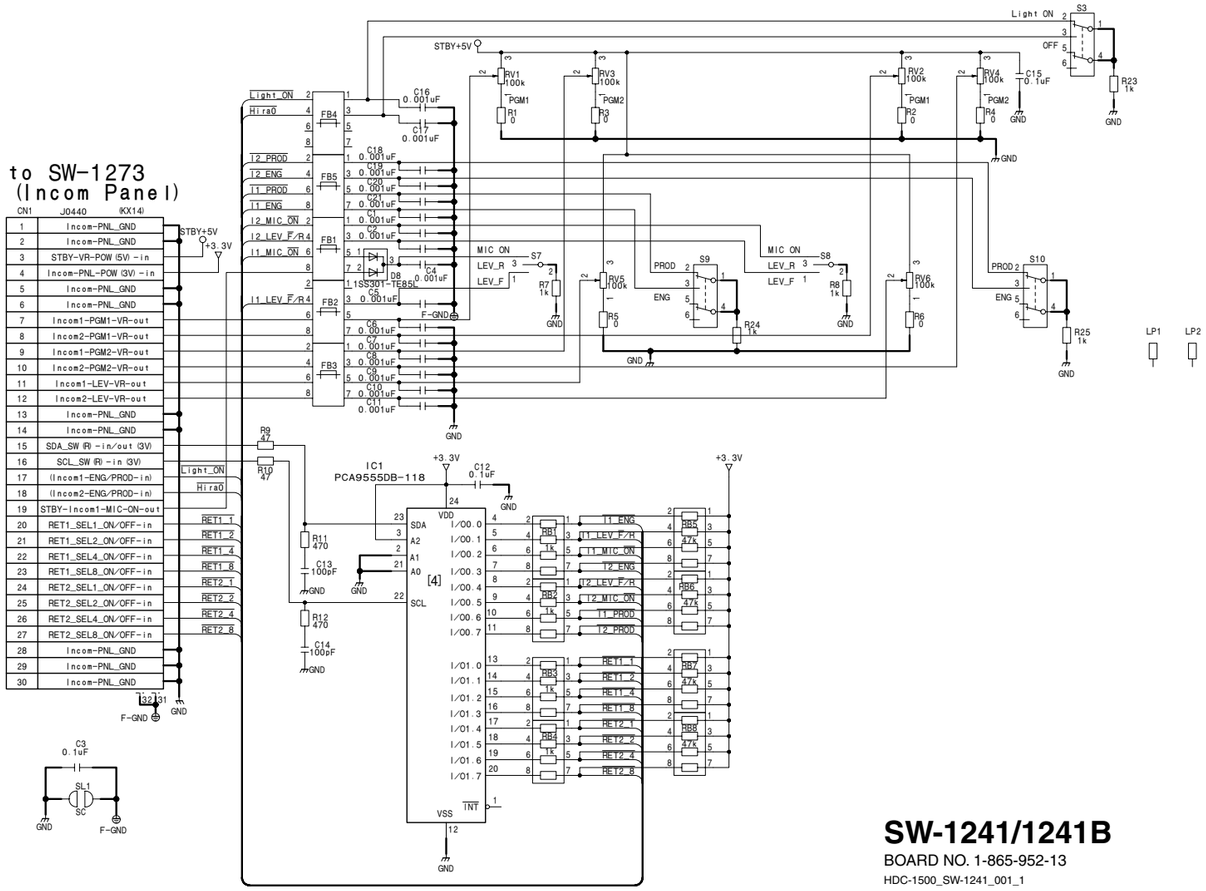
## SW-1241/1241B

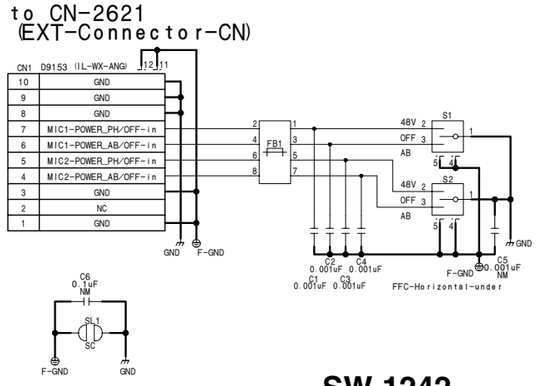BOARD NO. 1-865-952-13

HDC-1500_SW-1241_001_1




## SW-1245

BOARD NO. 1-865-954-13, 31

HDC-1500_SW-1245_001_1

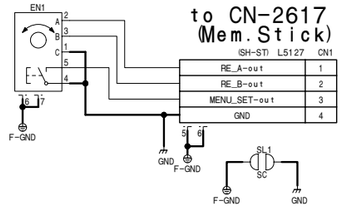


# SW-1273

BOARD NO. 1-865-946-13

HDC-1500_SW-1273_013_1

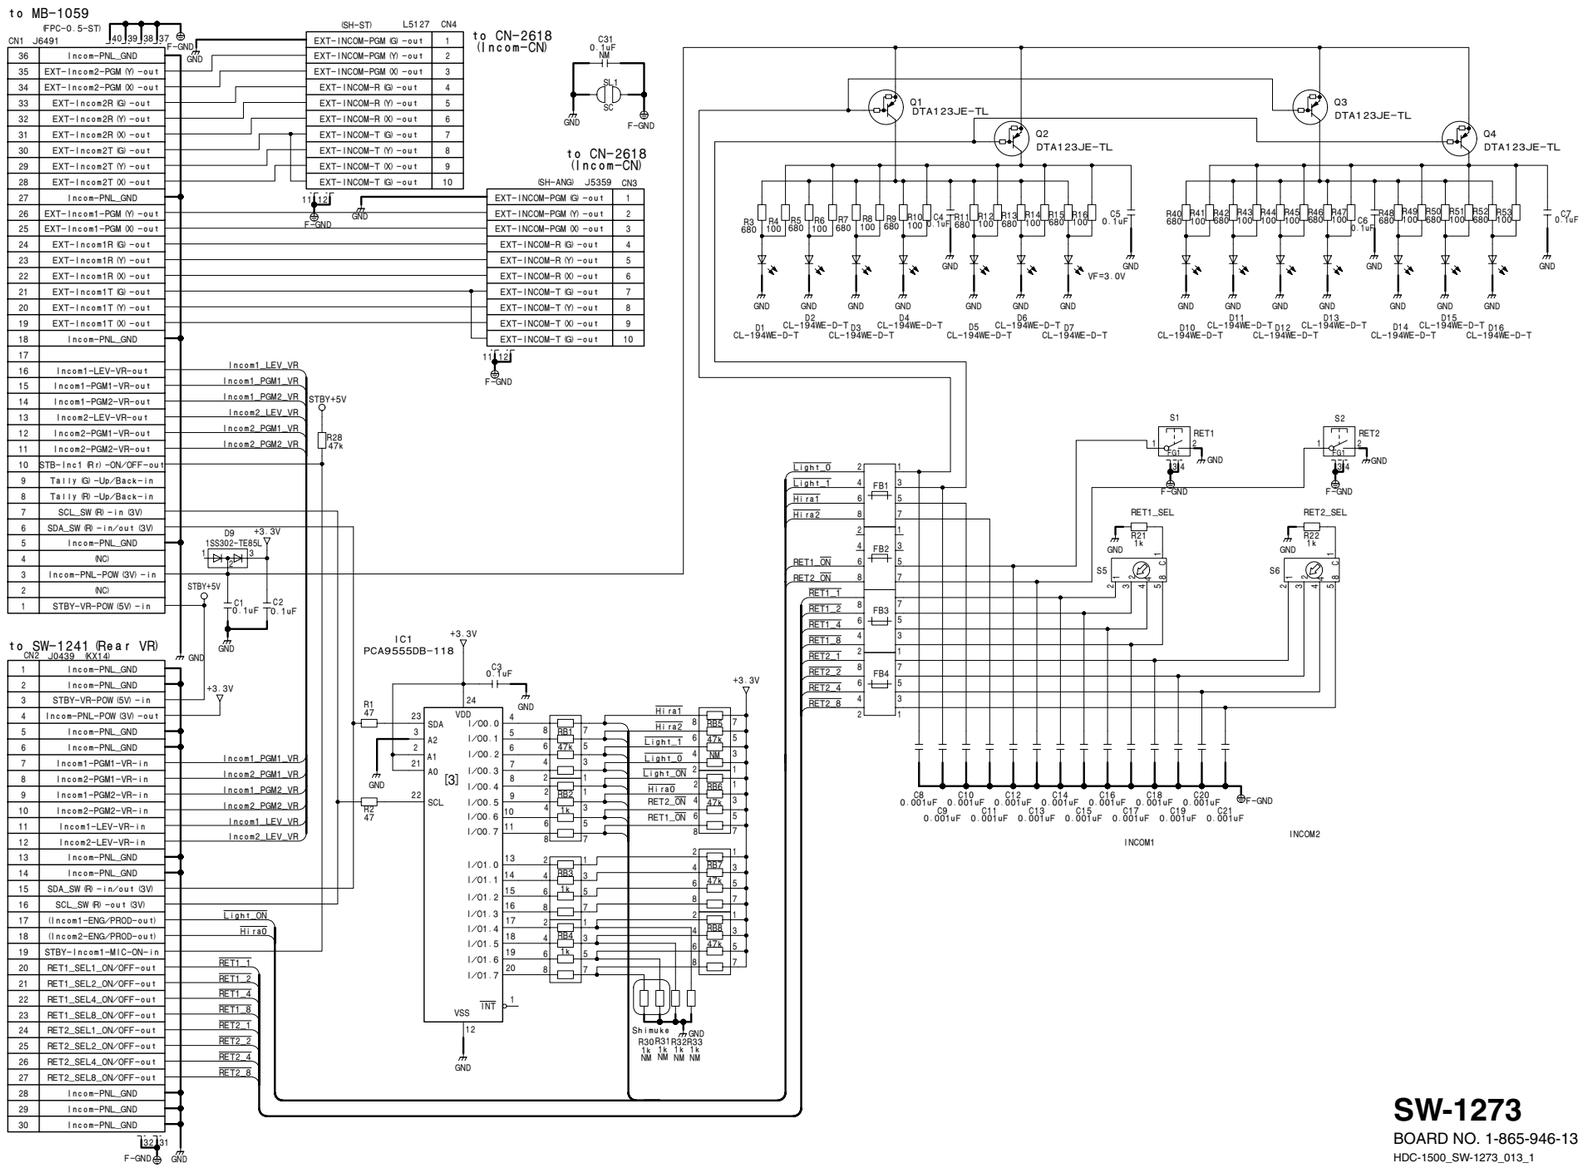


# SW-1241/1241B

BOARD NO. 1-865-952-15, 31

HDC-1500_SW-1241_015_1

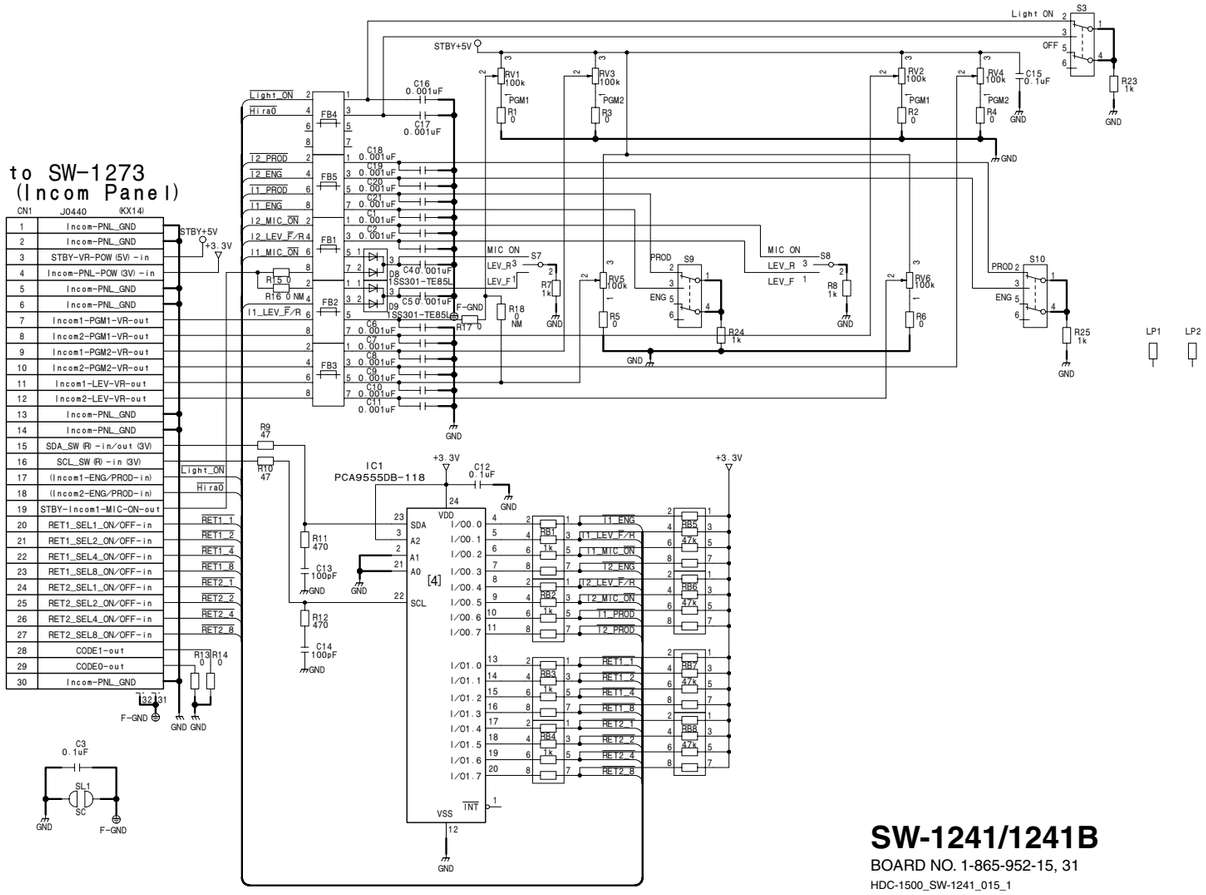


**SW-1273**
BOARD NO. 1-865-946-21, 31
HDC-1500_SW-1273G_001_1

TG-243 (1/2)
SUFFIX: -14, 21, 22





4-116

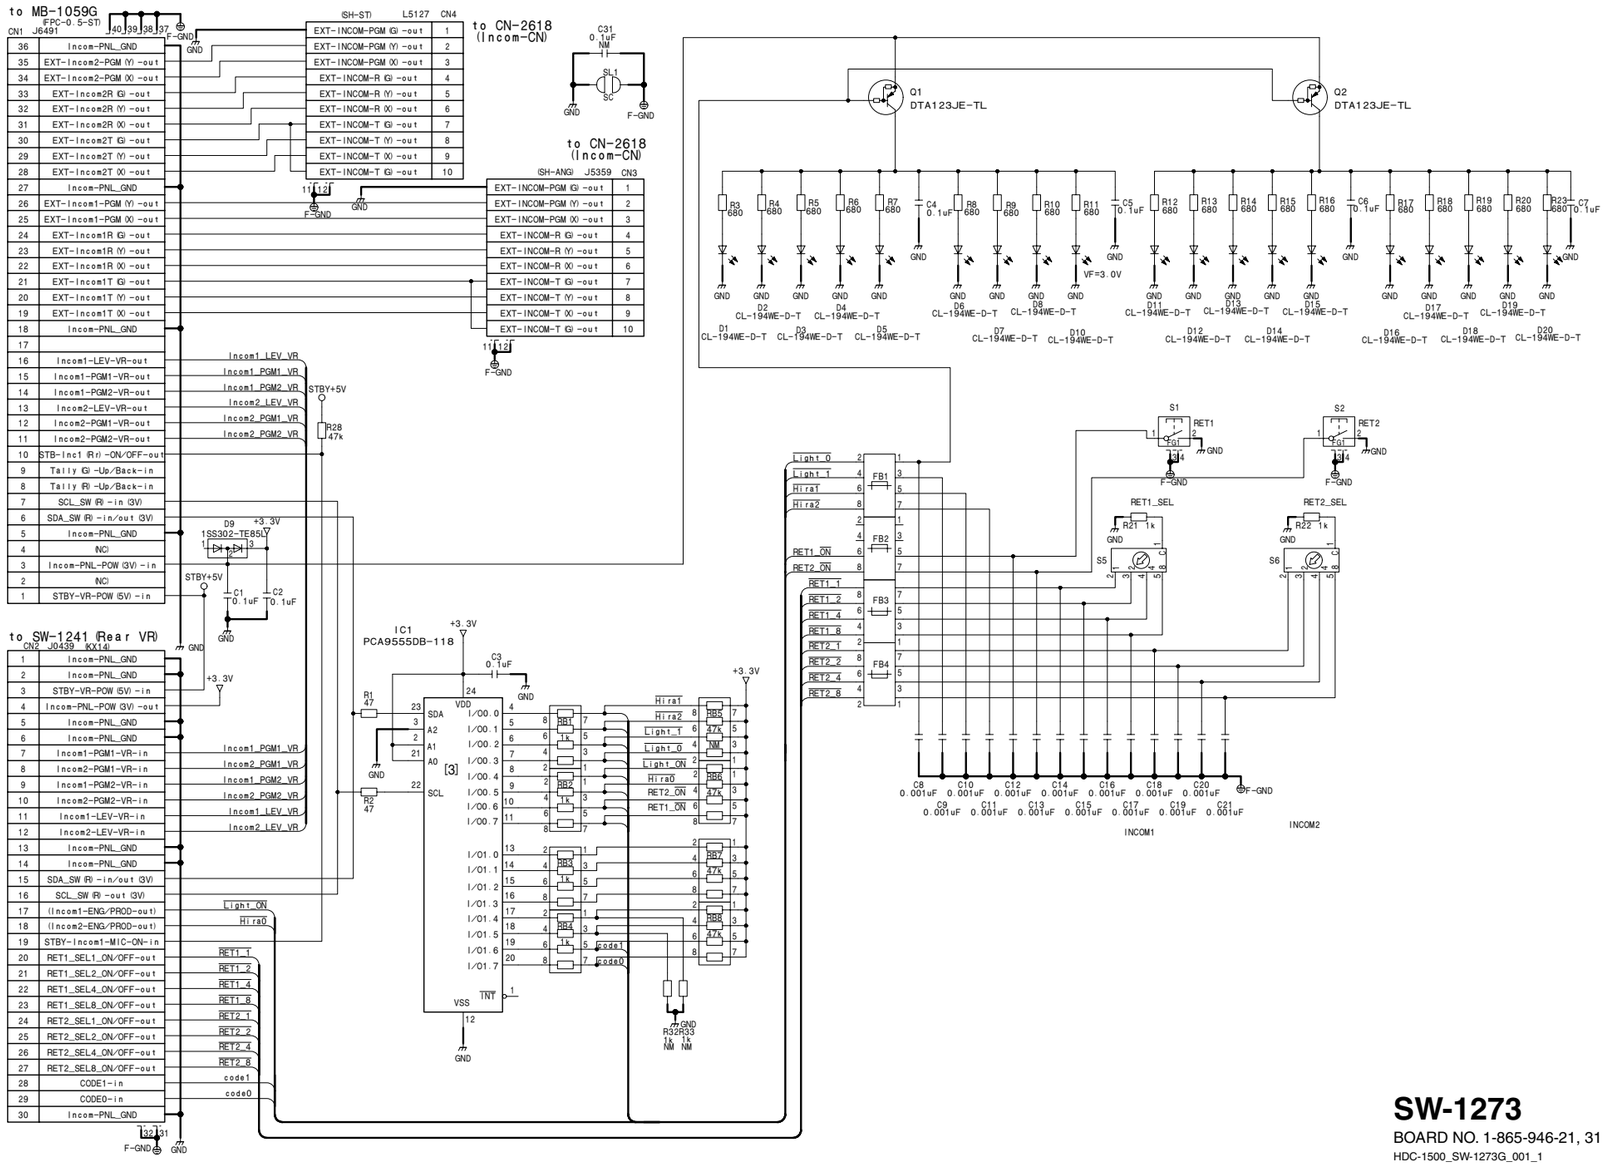


**TG-243 (1/2)**
BOARD NO. 1-865-972-14, 21, 22
HDC-1500_TG-243G_021_1

TG-243 (2/2)
SUFFIX: -14, 21, 22

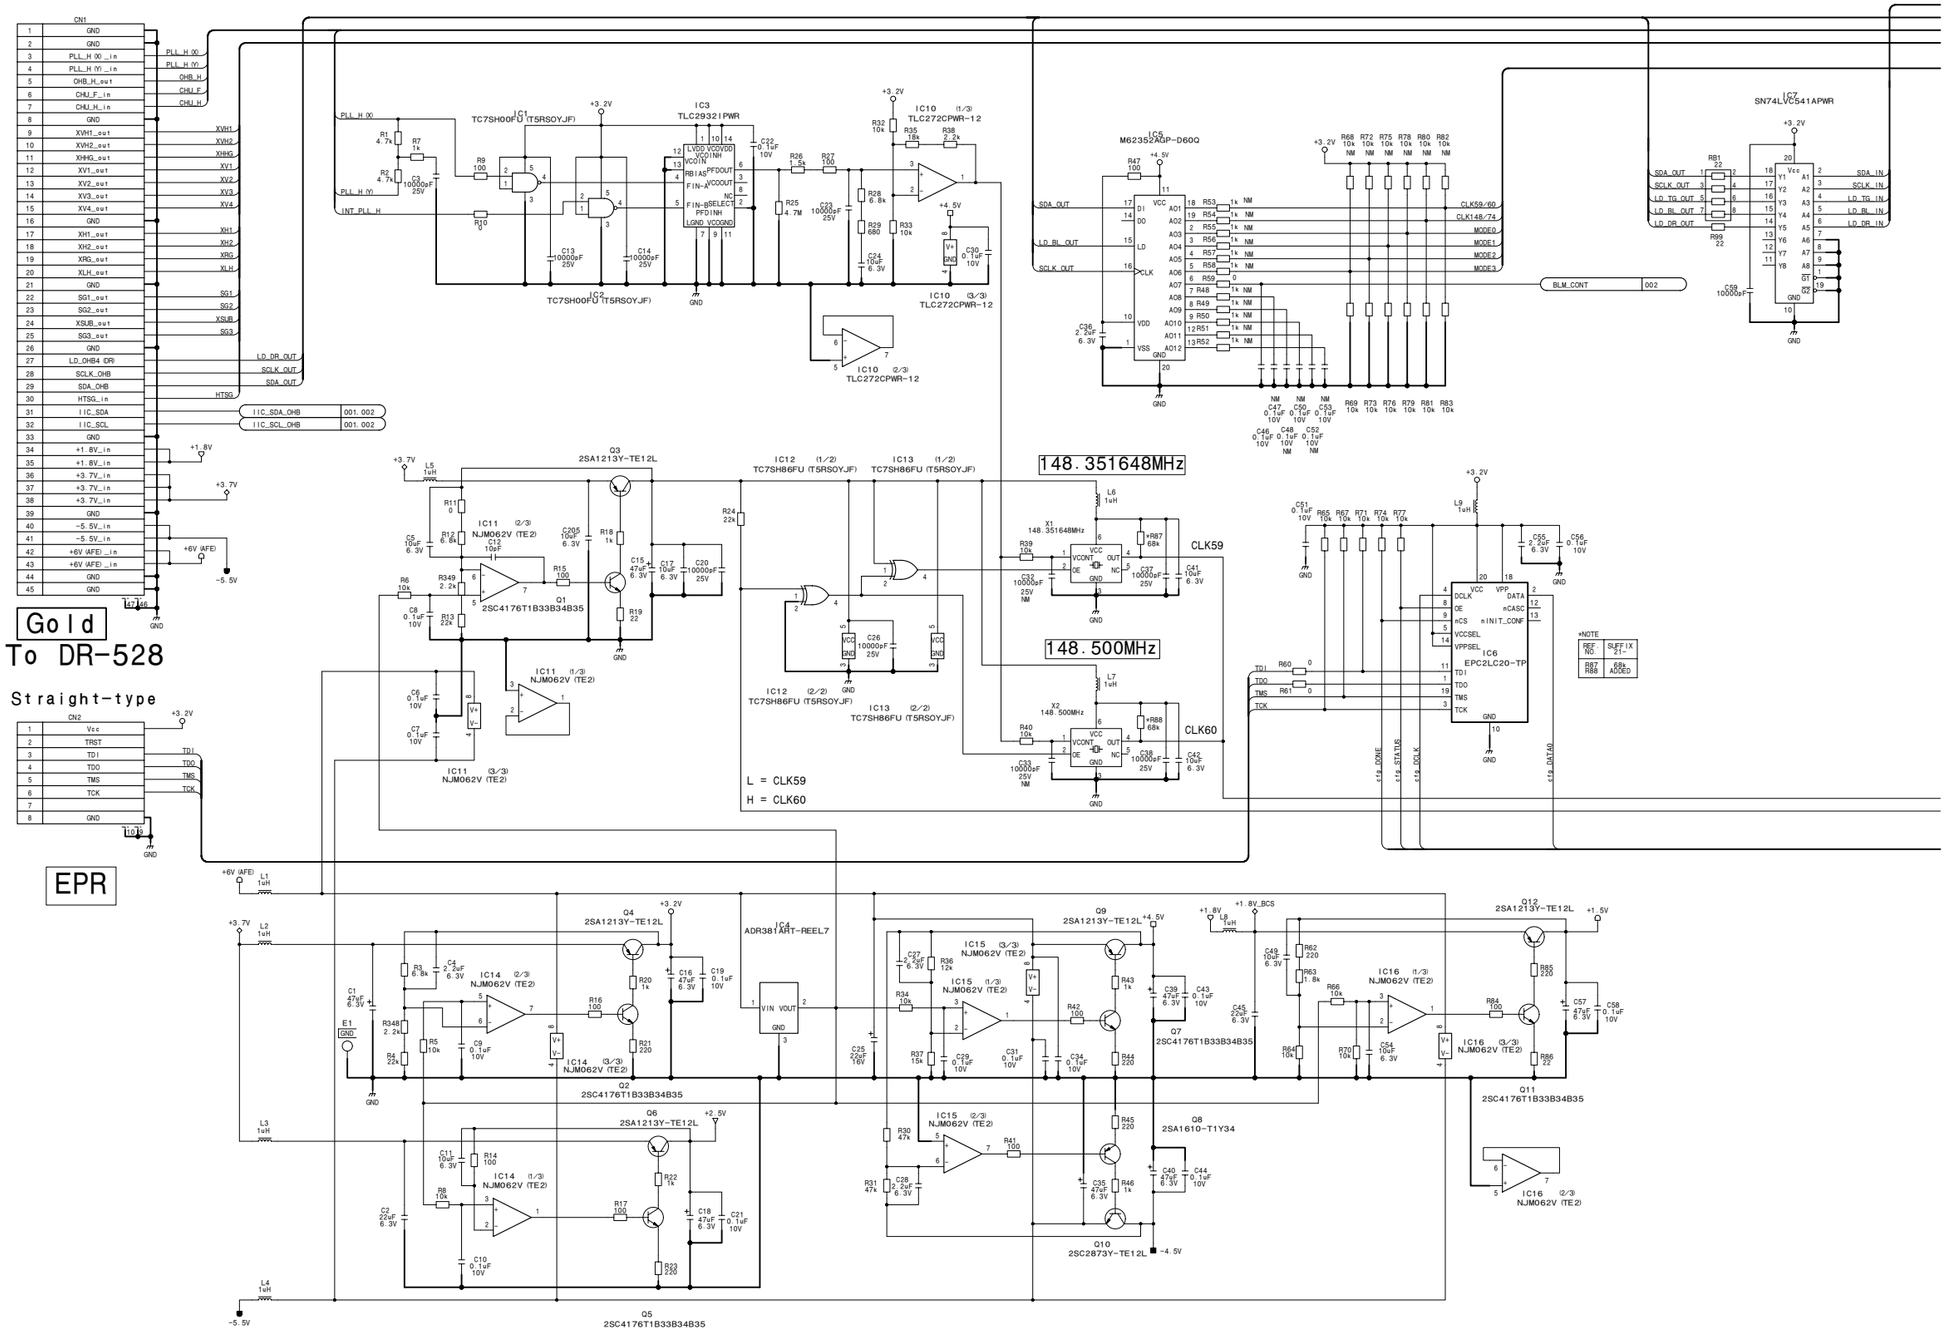



4-118
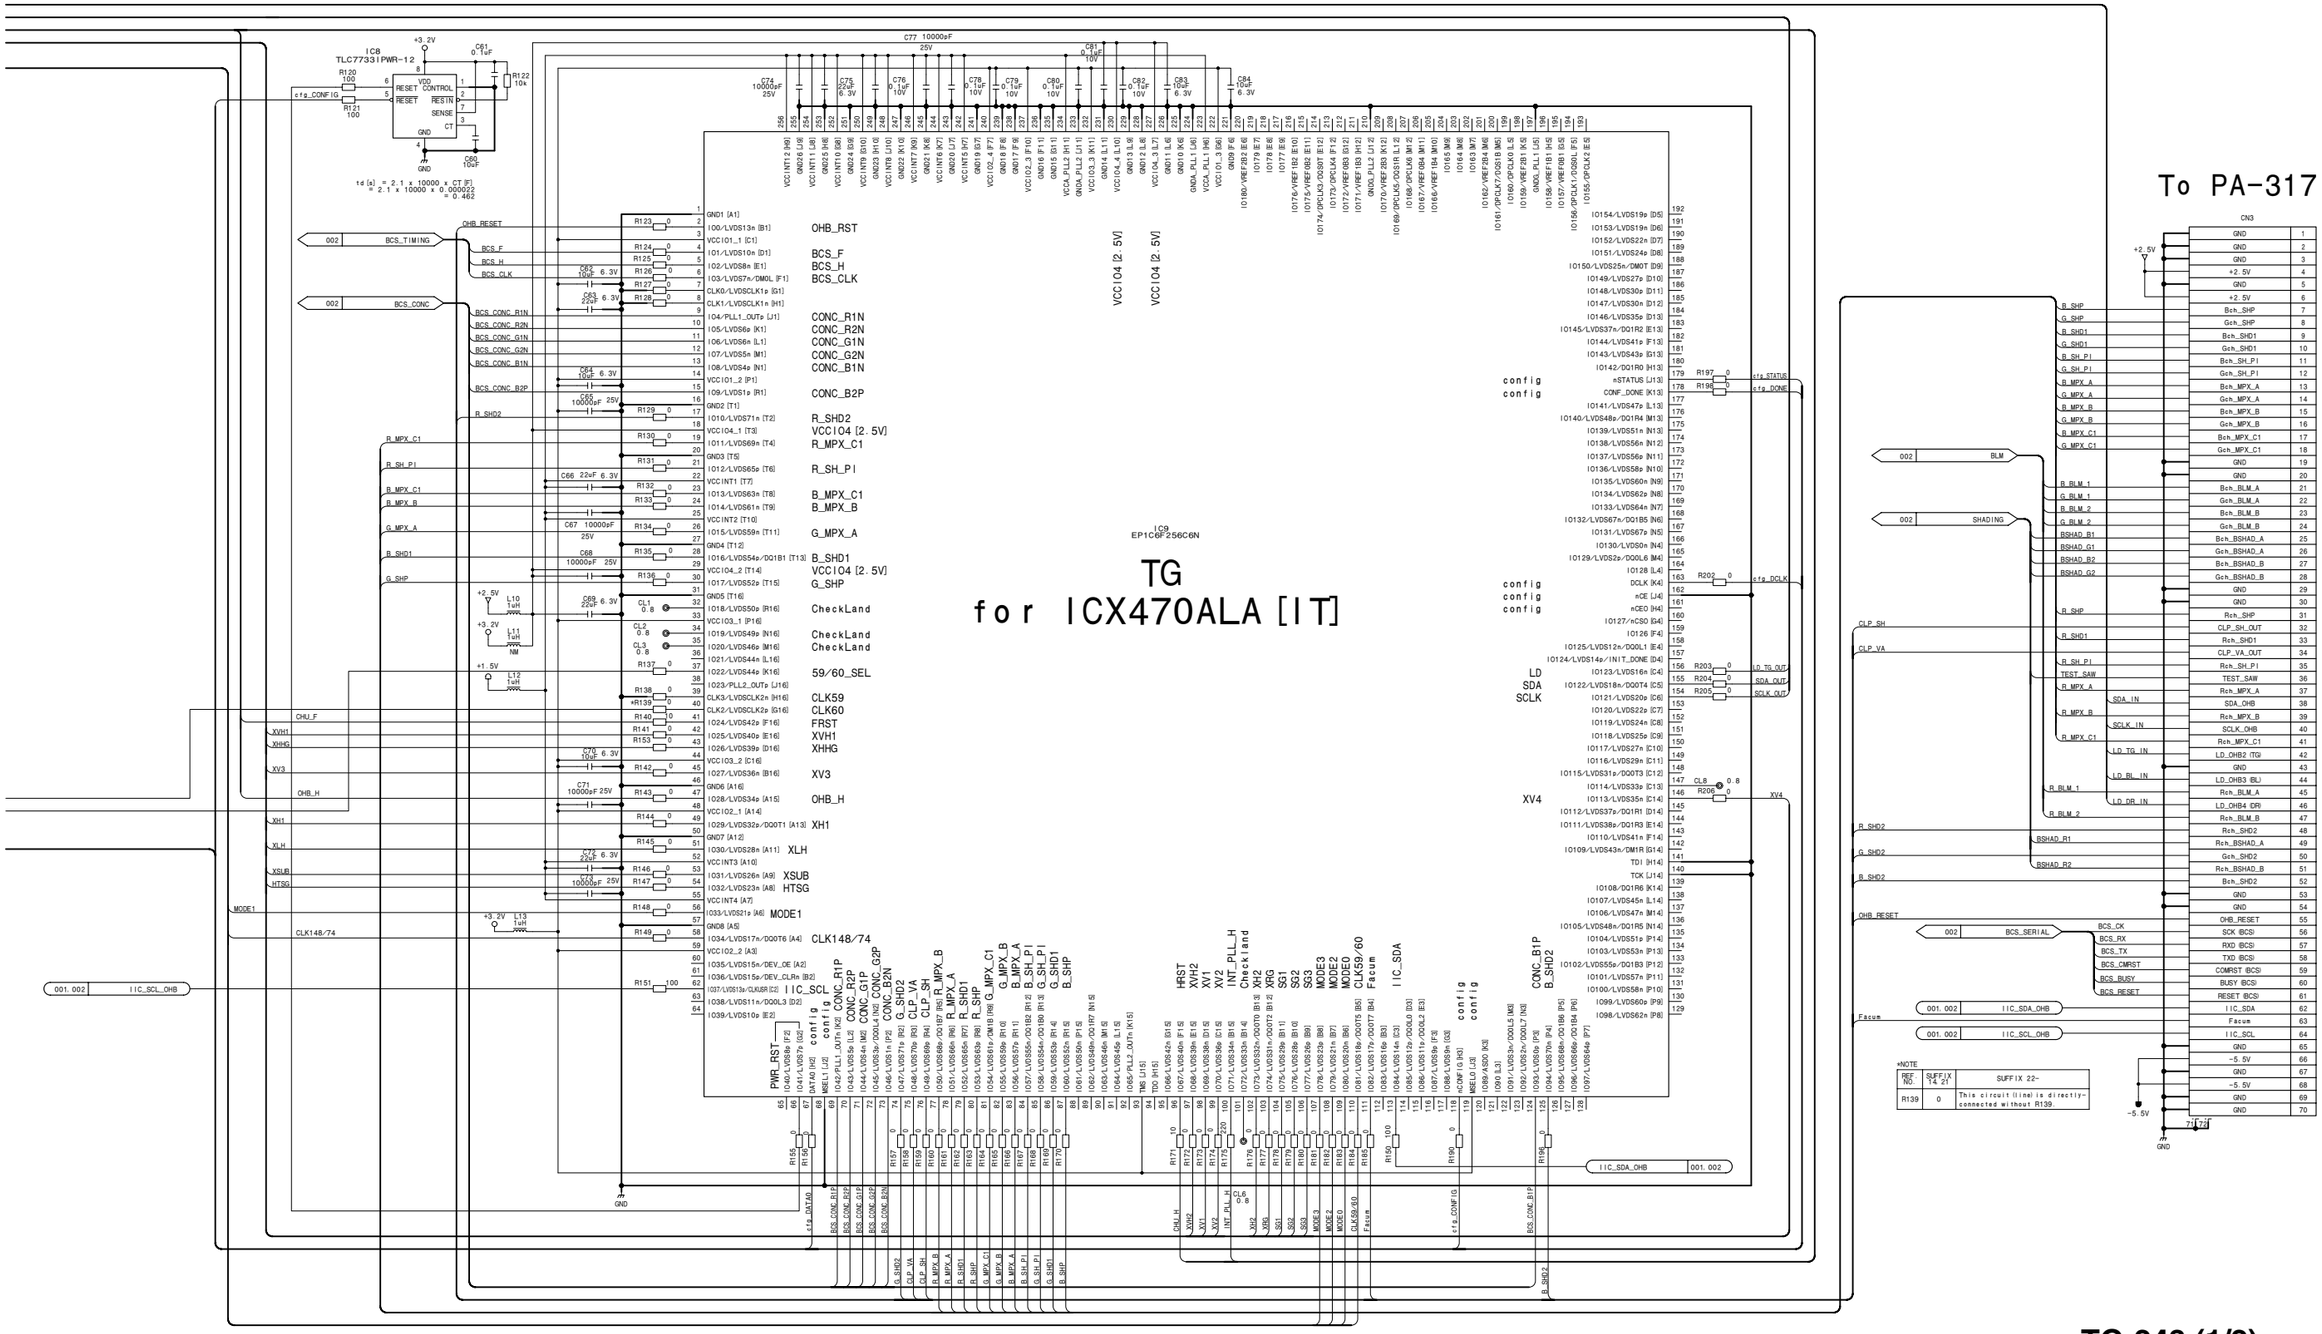
# TG-243 (2/2)
**SUFFIX: -14, 21, 22**

TG-243 (2/2)
SUFFIX: -14, 21, 22

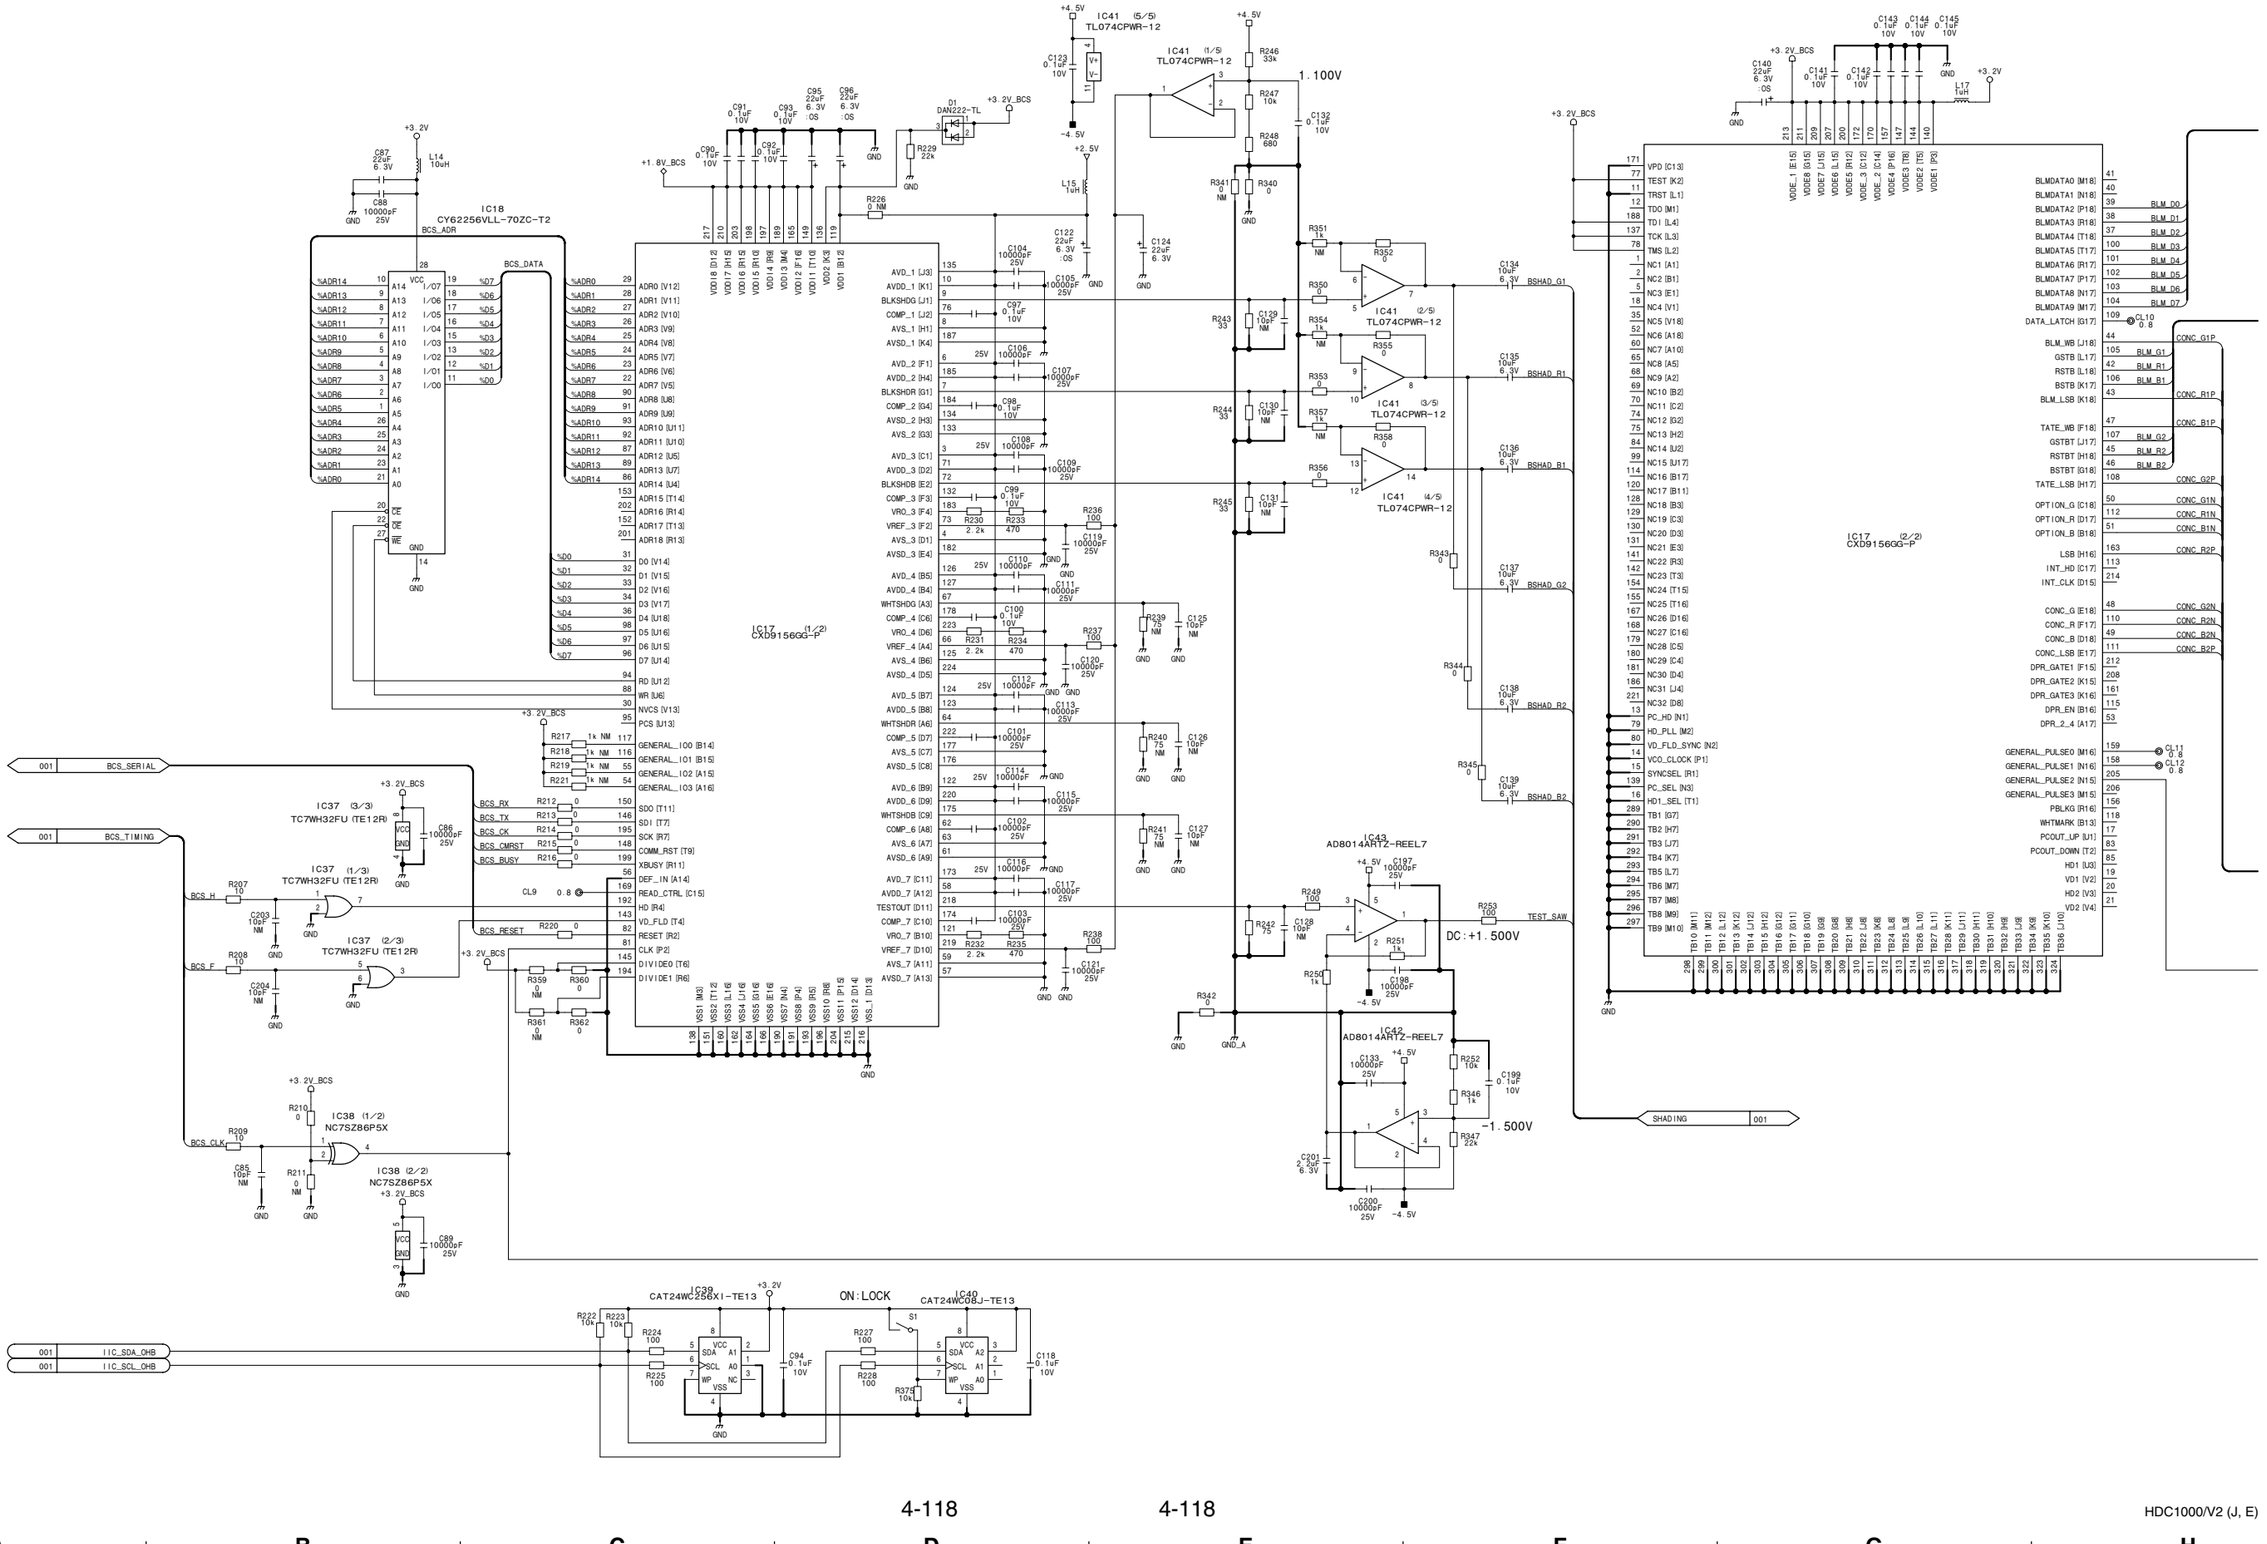


*NOTE

| REF. NO. | SUFFIX 14 | SUFFIX 21~ |
|---|---|---|
| C206 | 10pF | 22pF |
| C208 C209 C210 | 0.1uF | NM |
| R376 | 10 | 100 |

# TG-243 (2/2)
BOARD NO. 1-865-972-14, 21, 22
HDC-1500_TG-243G_021_2

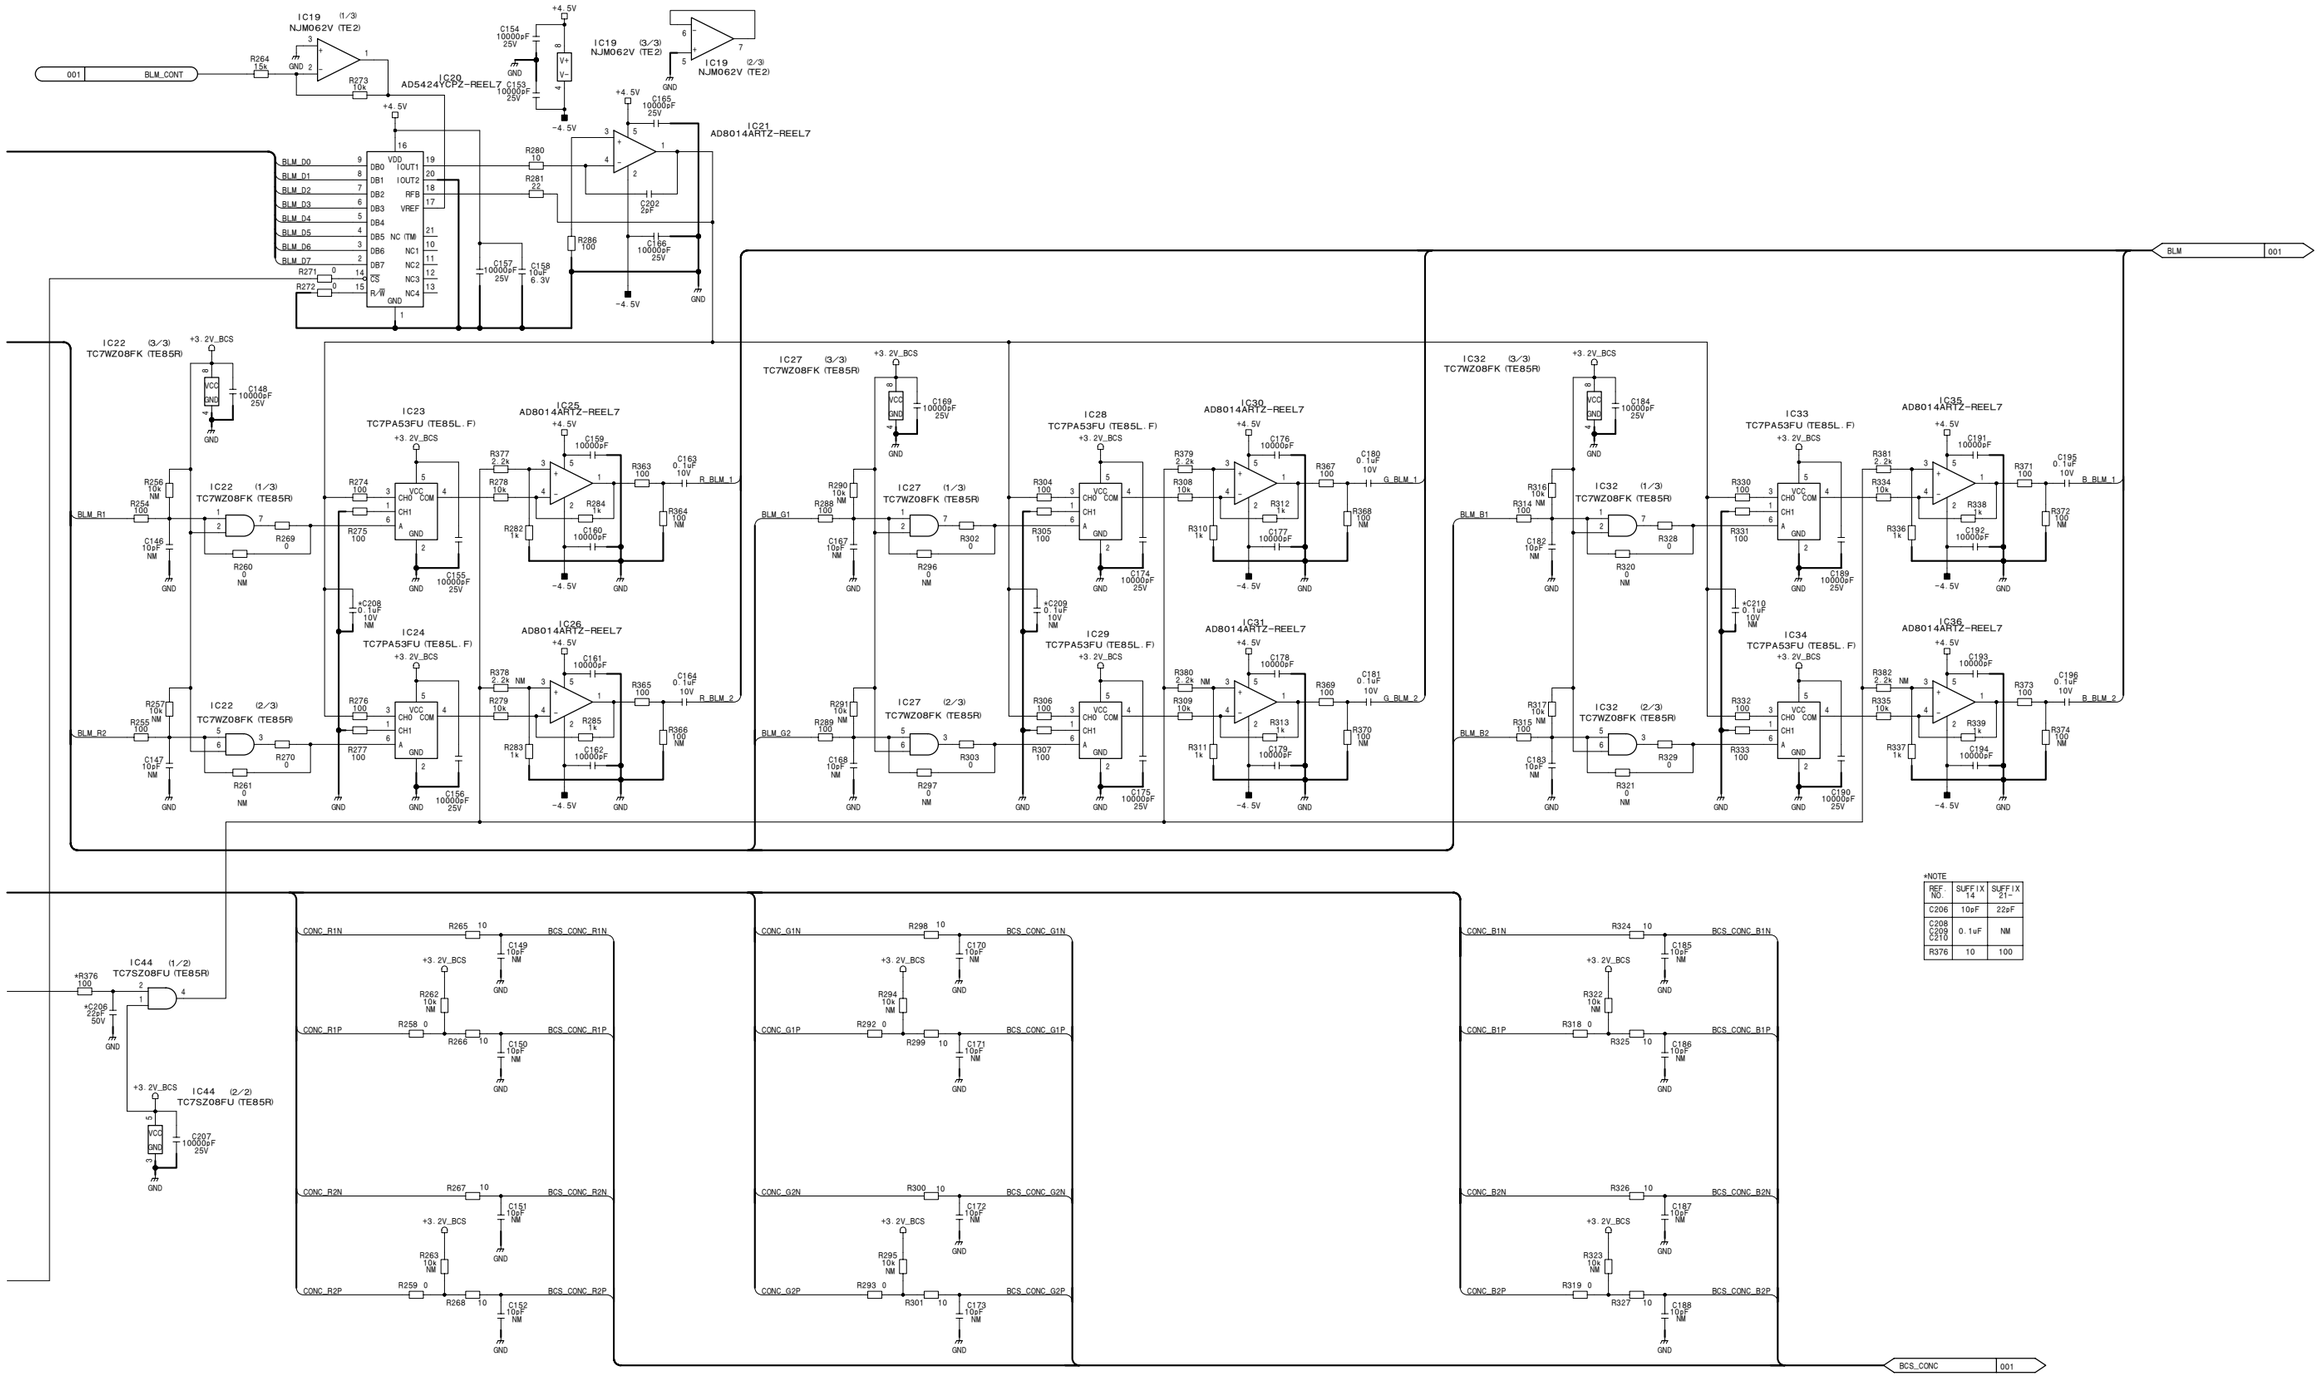


4-116 (a) 4-116 (a)

HDC1000/V2 (J, E)

TG-243 (1/2)
SUFFIX: -23

# TG
# for ICX470ALA [IT]

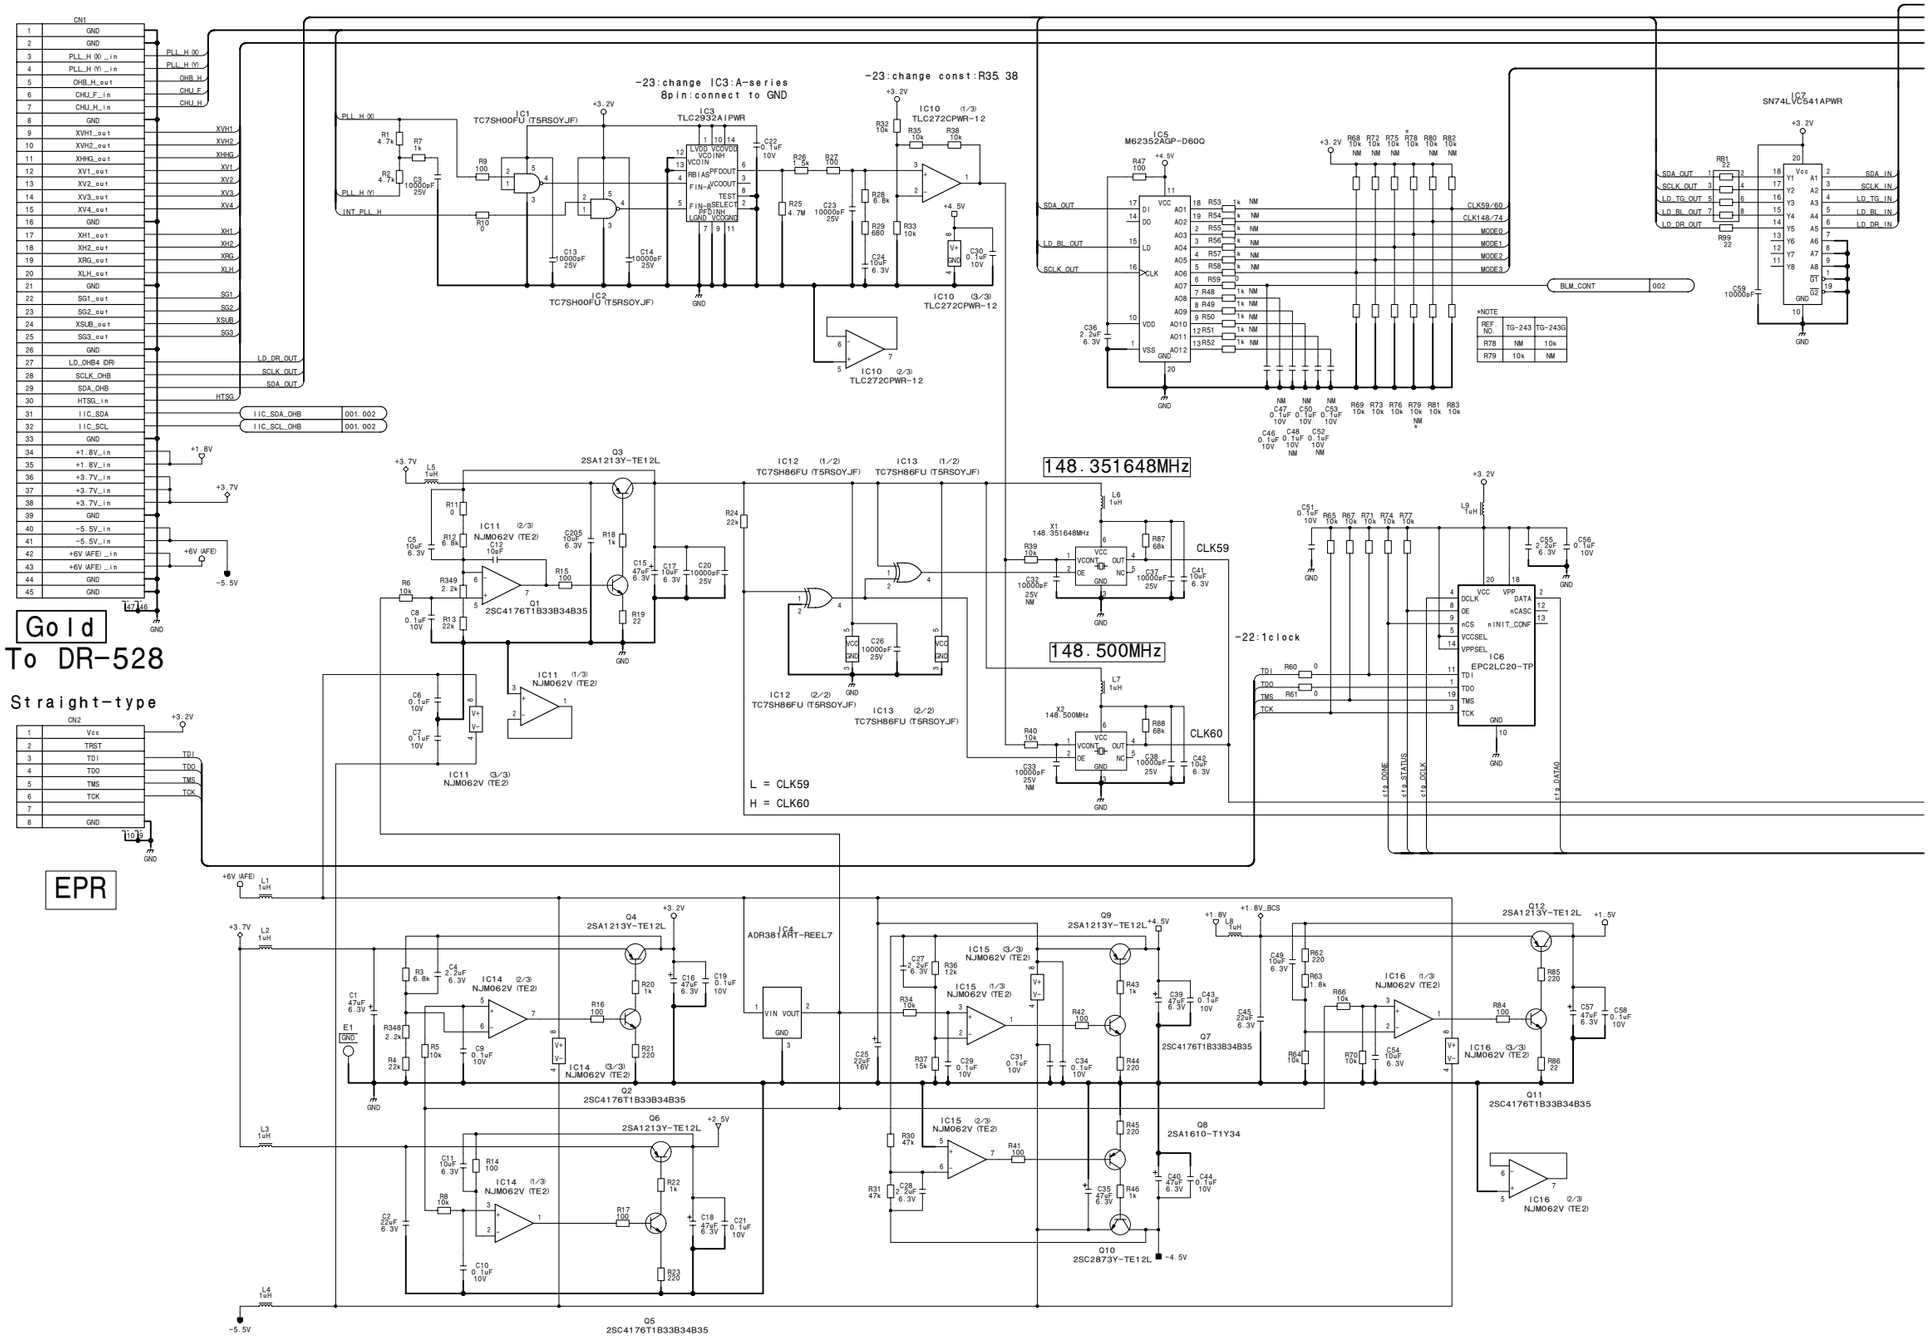IC9
EP1C6F256C6N

To PA-317

-22:1clock
net-change R138
del R139

-23:change IC8
threshold voltage
2.93V --> 2.63V

td (s) = 2.1 x 10000 x CT [F]
= 2.1 x 10000 x 0.000022
= 0.462

-23:add C211

-23:add C212




| *NOTE | | |
|---|---|---|
| REF NO. | TG-243 | TG-243G |
| R383<br>R387<br>R391 | 0Ω | NM |




**TG-243 (2/2)**
BOARD NO. 1-865-972-23
HDC-1500_TG-243G_021_2

TG-243BG (1/2)
SUFFIX: -22

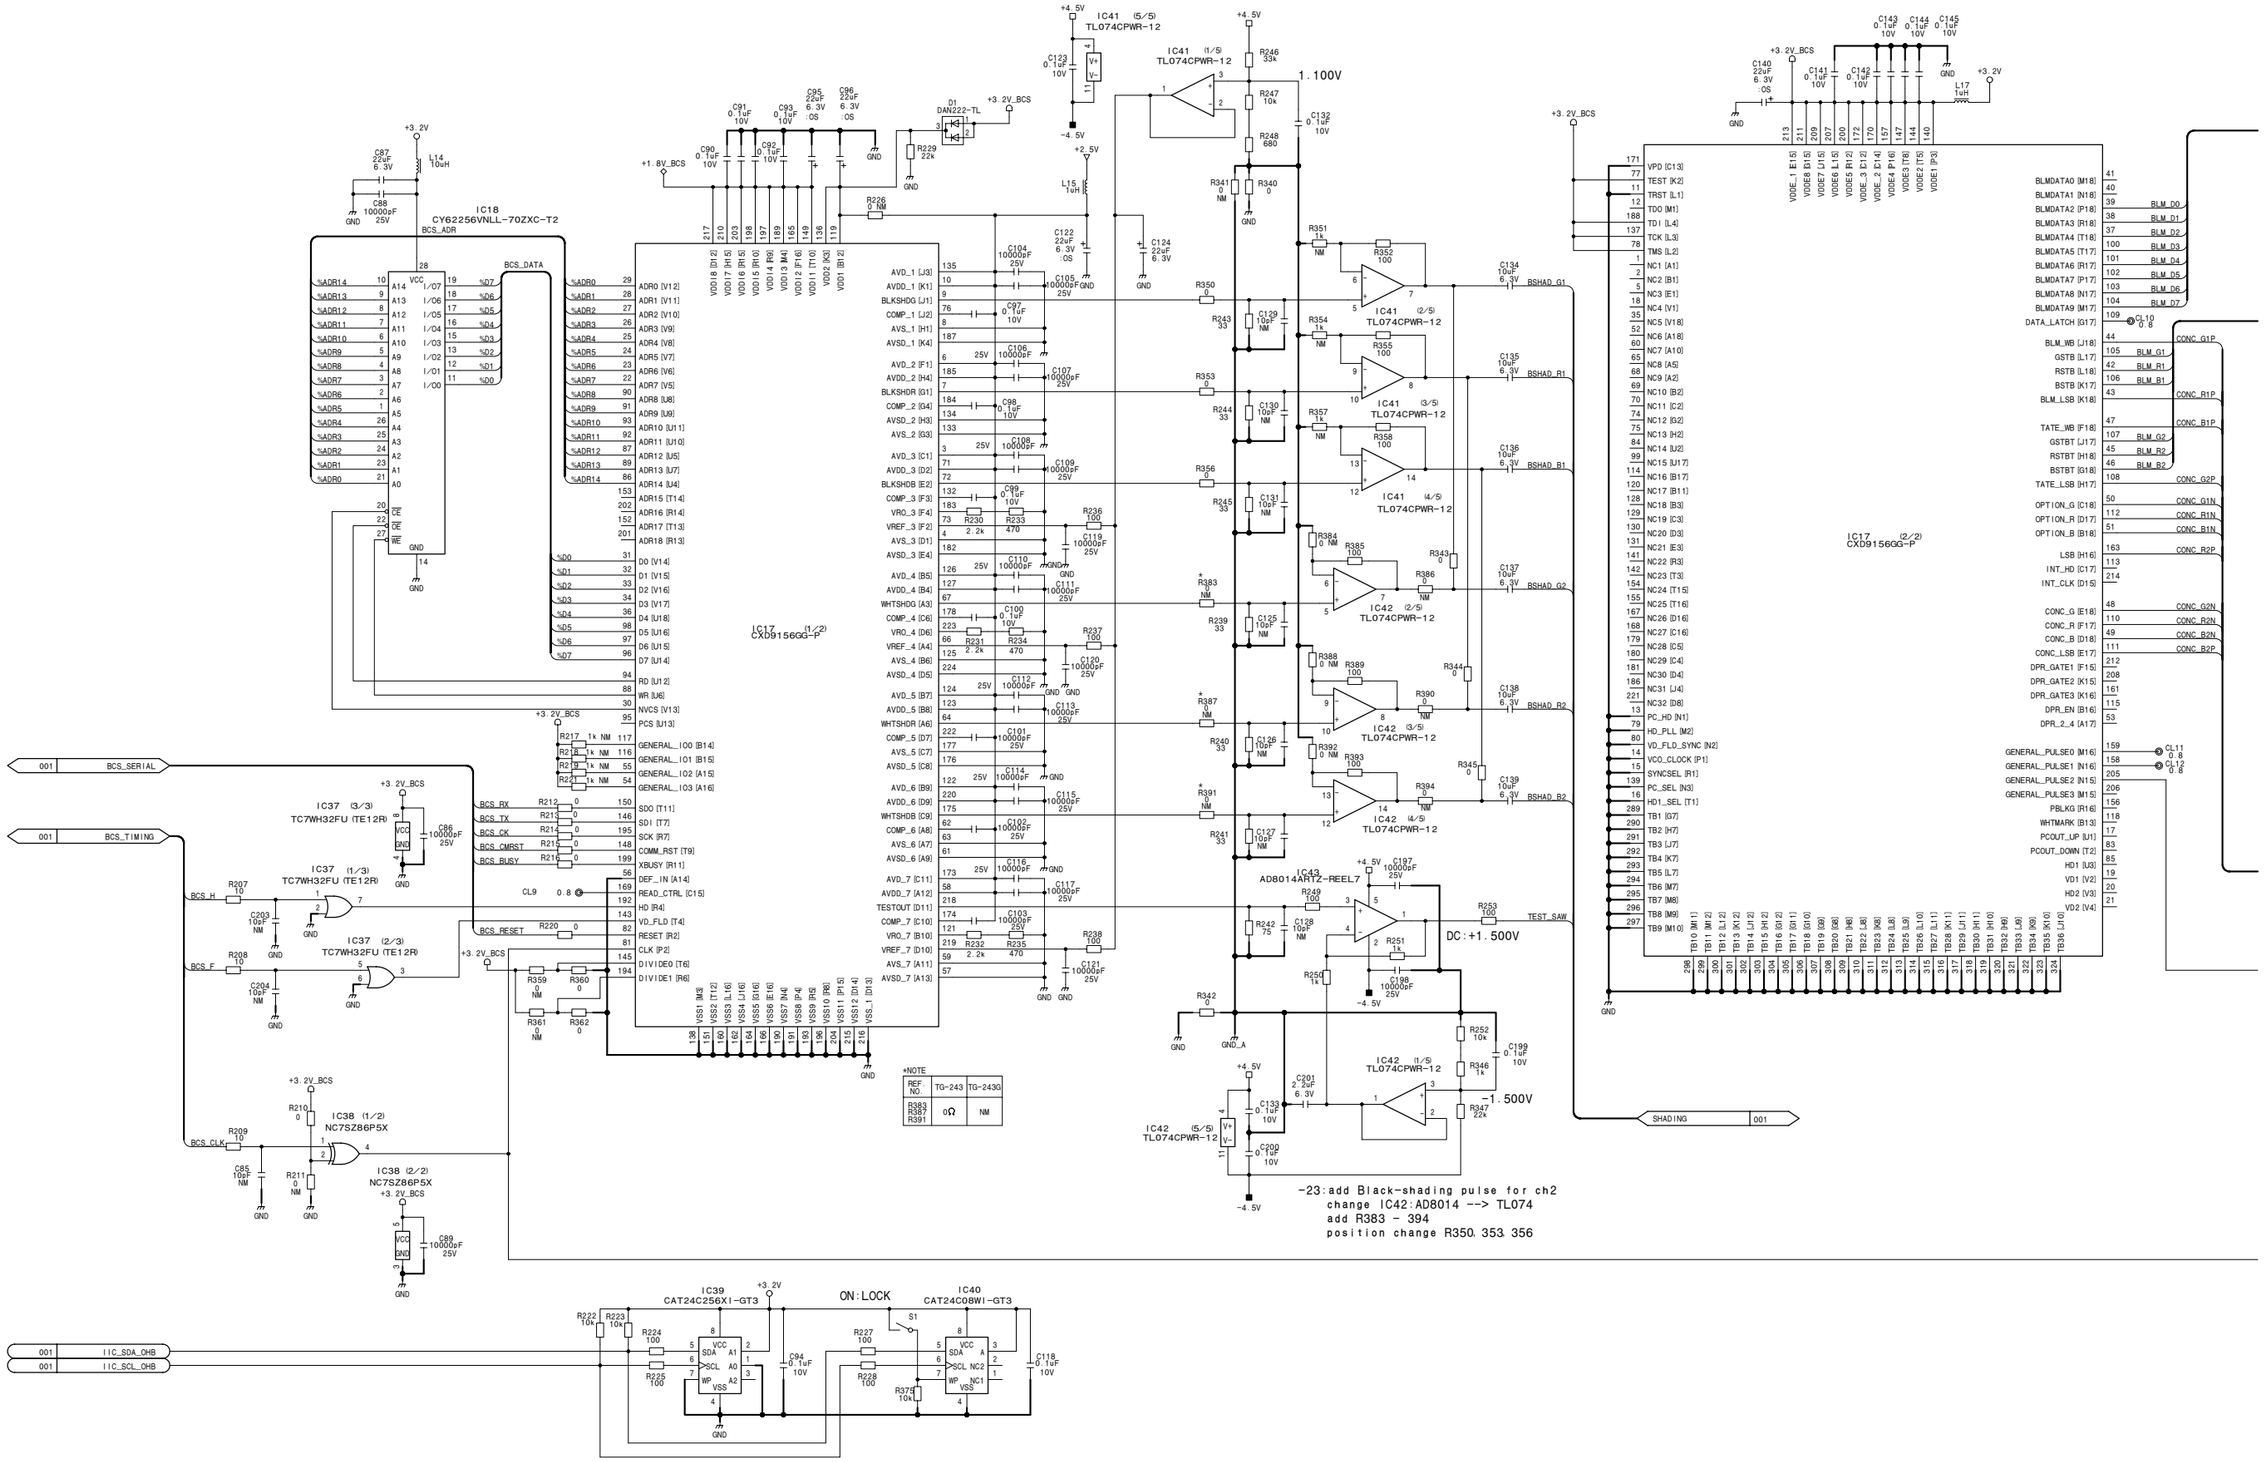



4-120

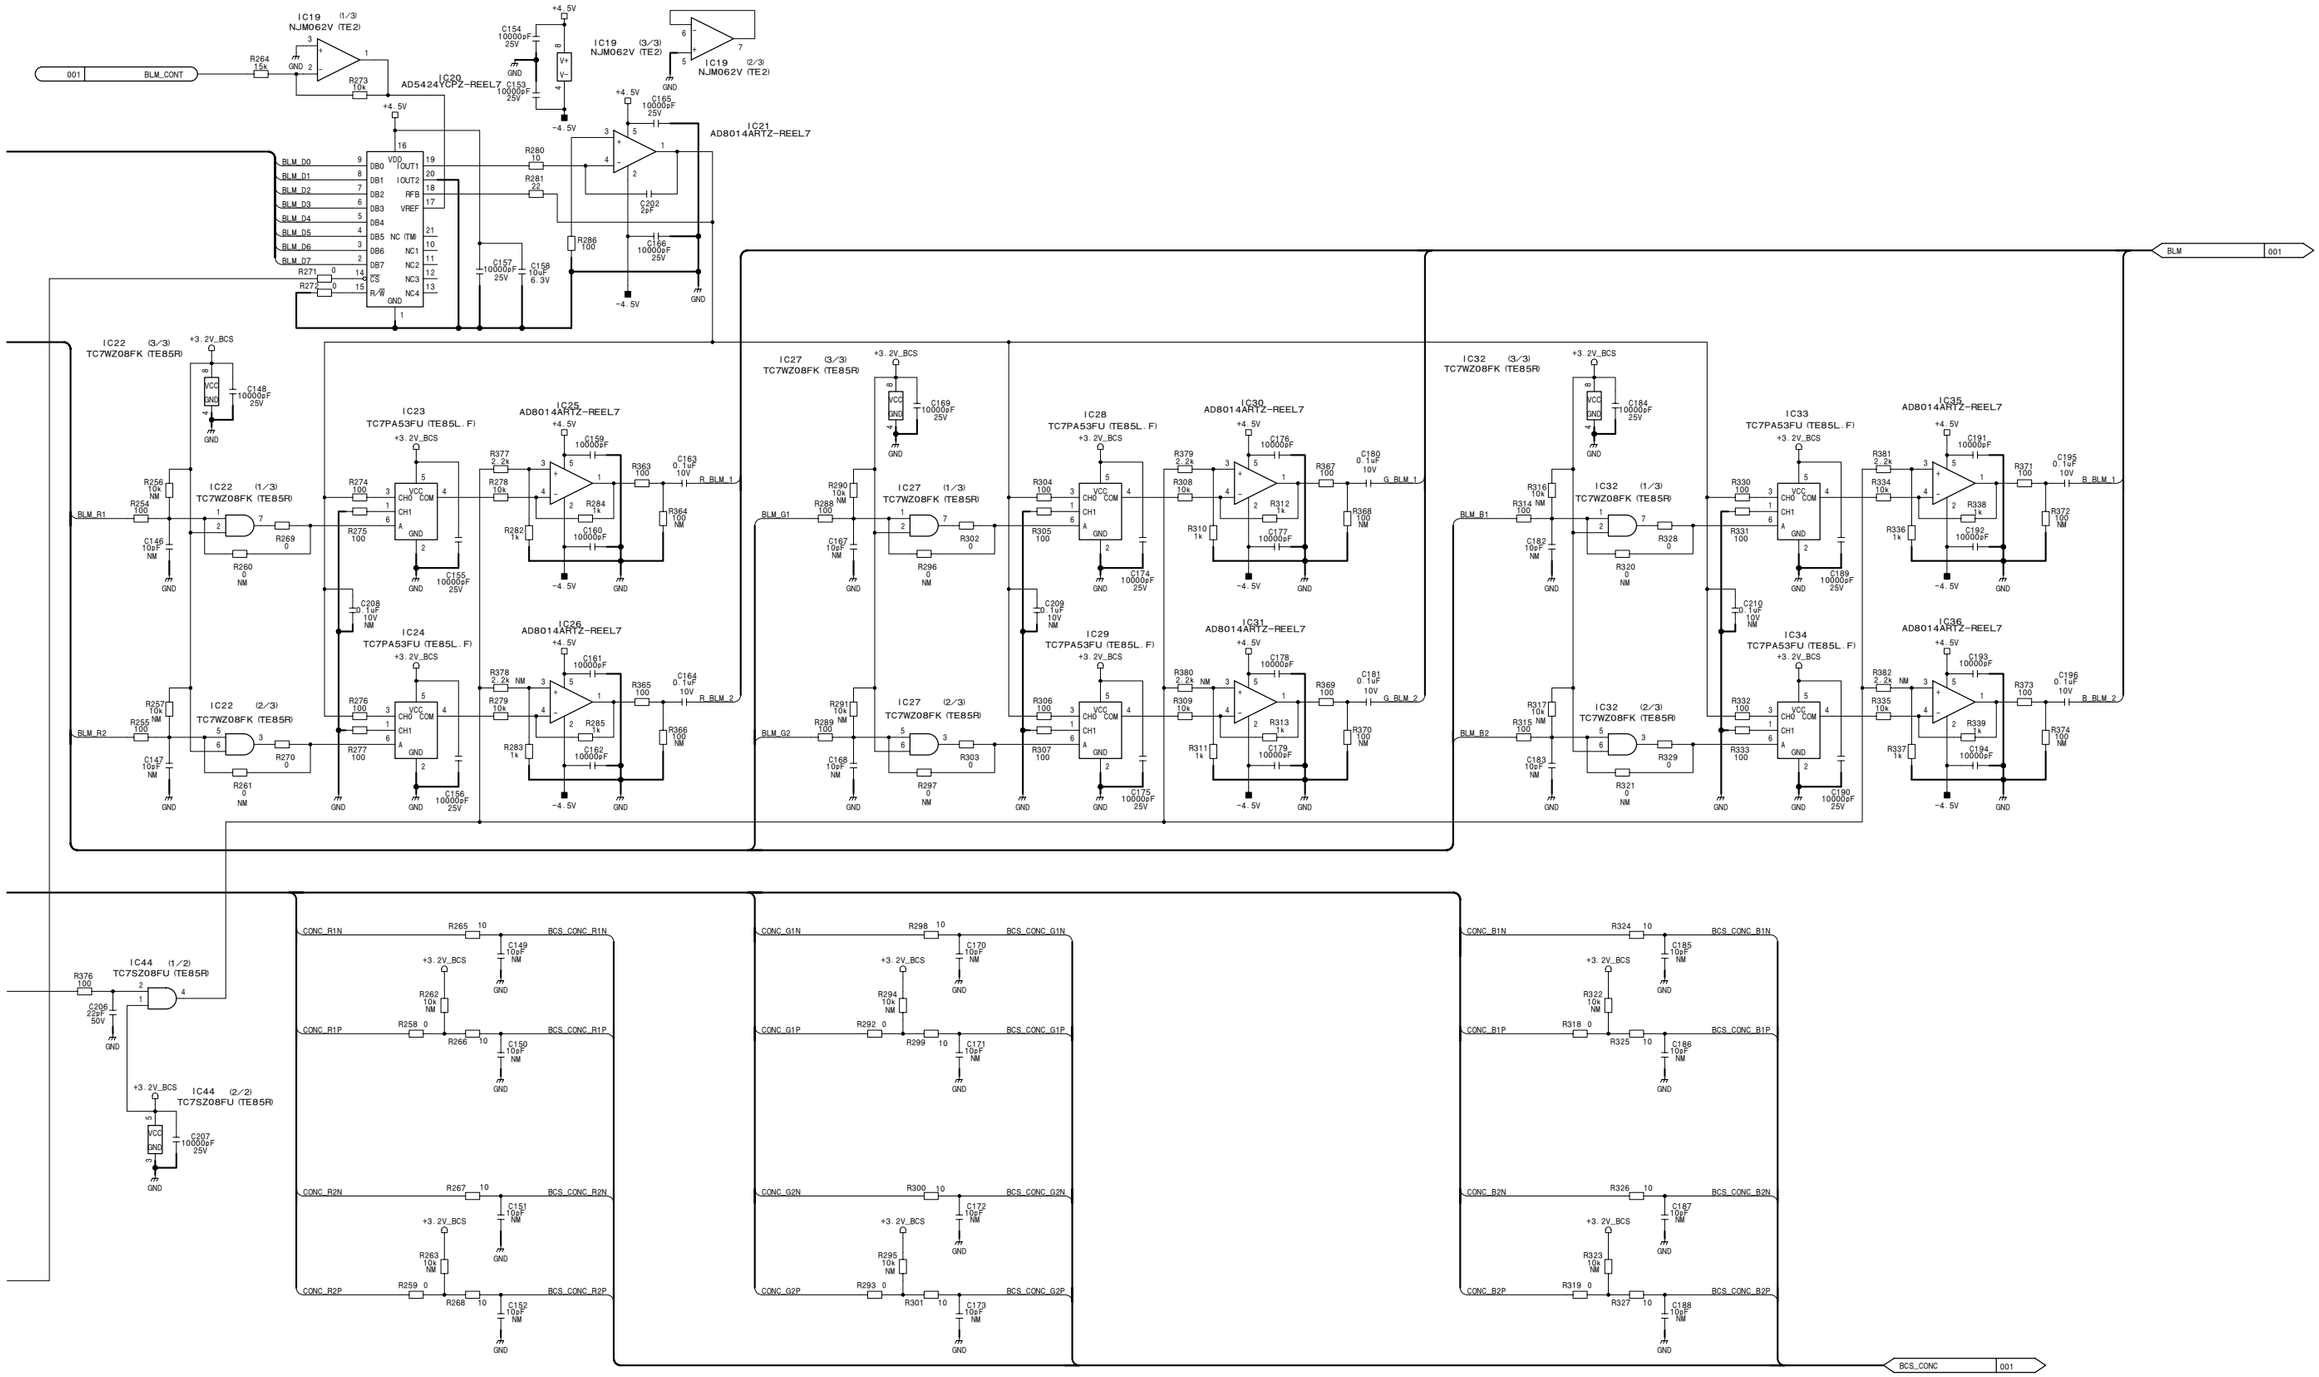TG-243BG (1/2)
SUFFIX: -22

# TG
# for ICX470ALA [IT]



TG-243BG (2/2)
SUFFIX: -22

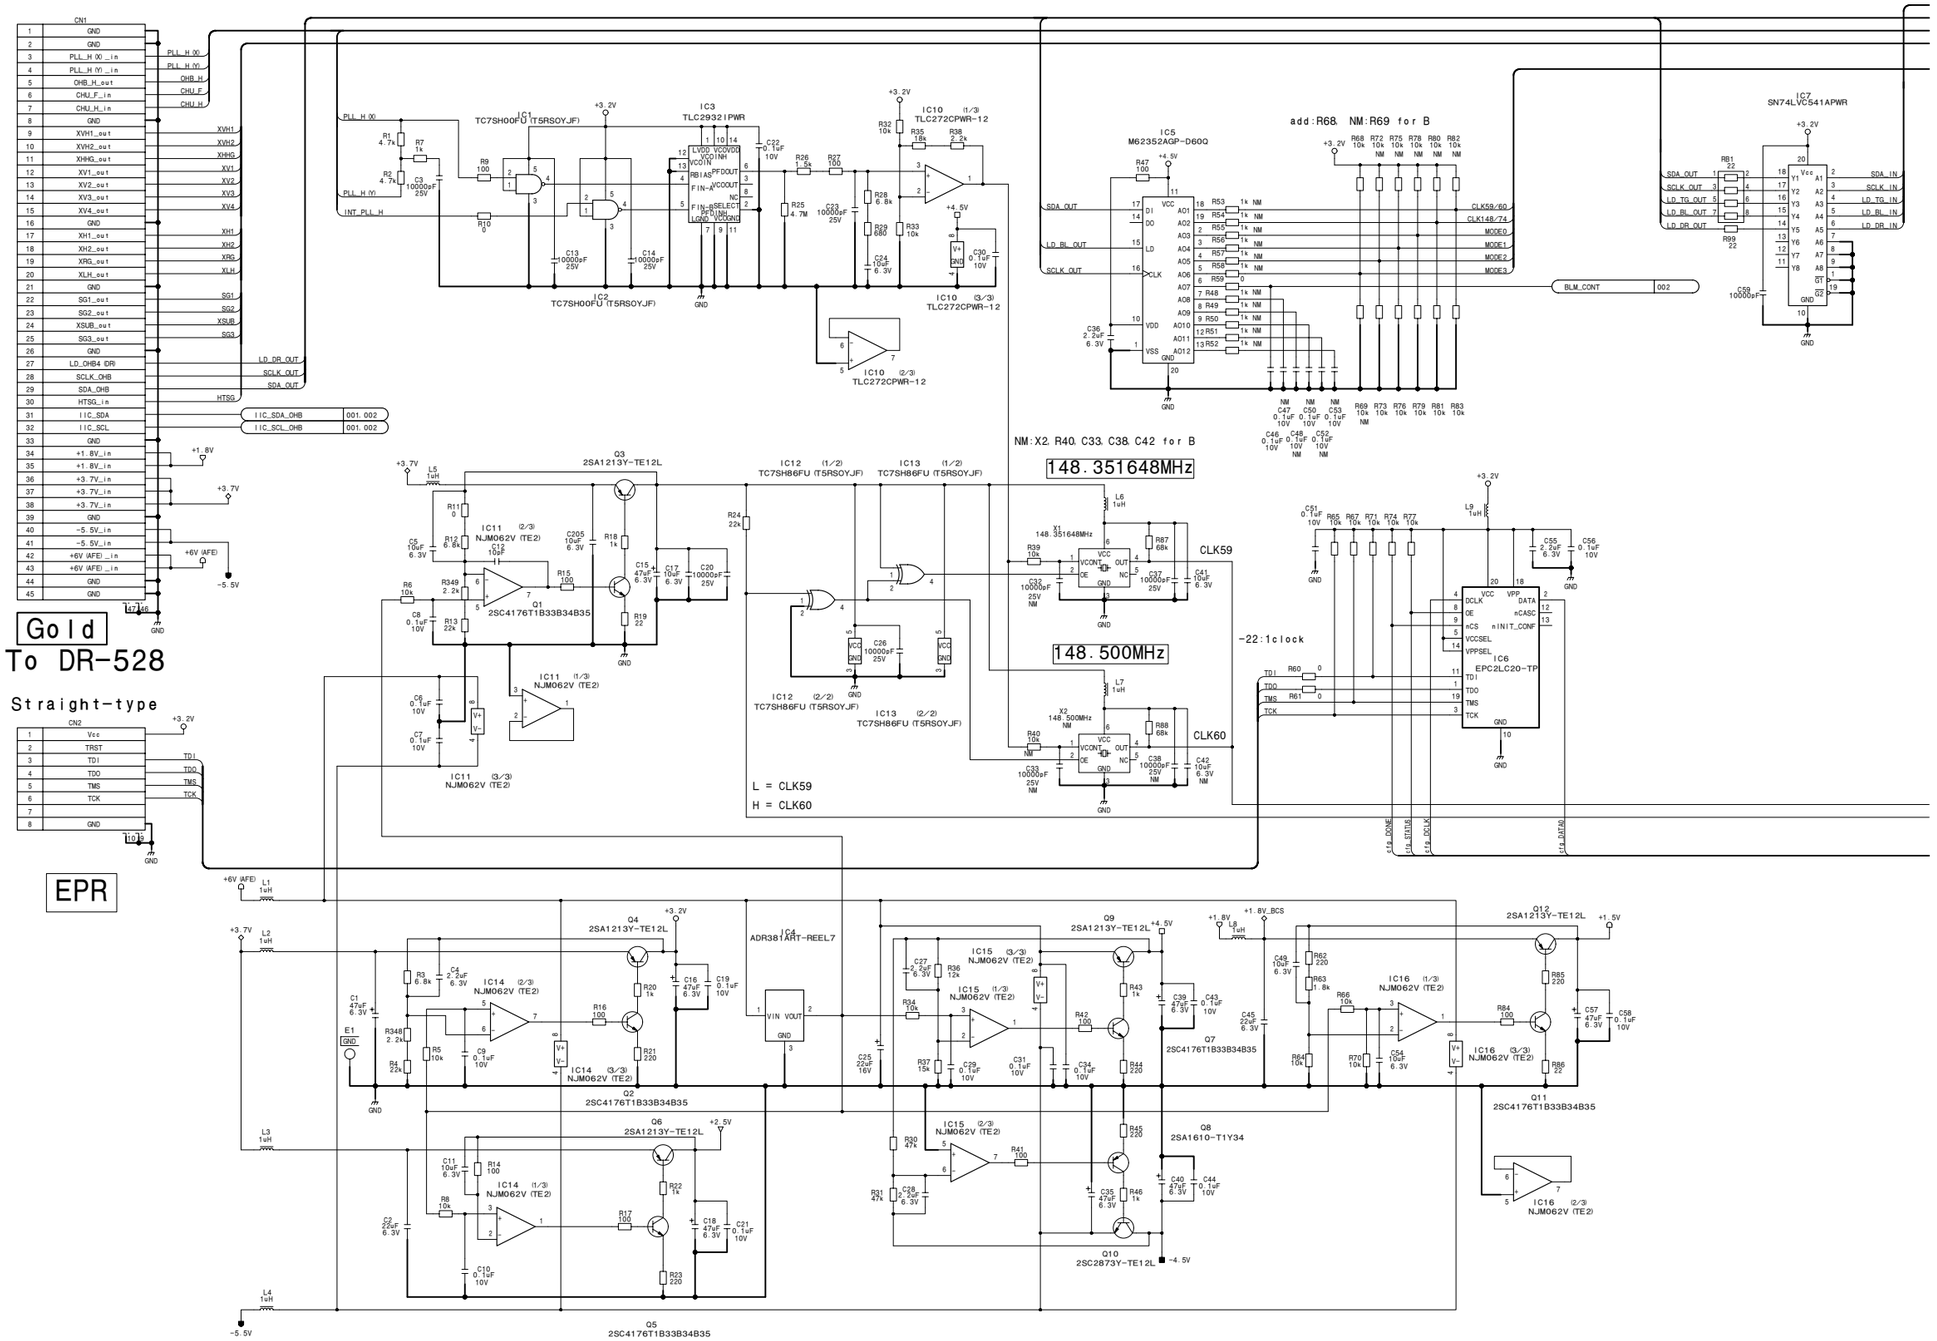



4-122

TG-243BG (2/2)
SUFFIX: -22

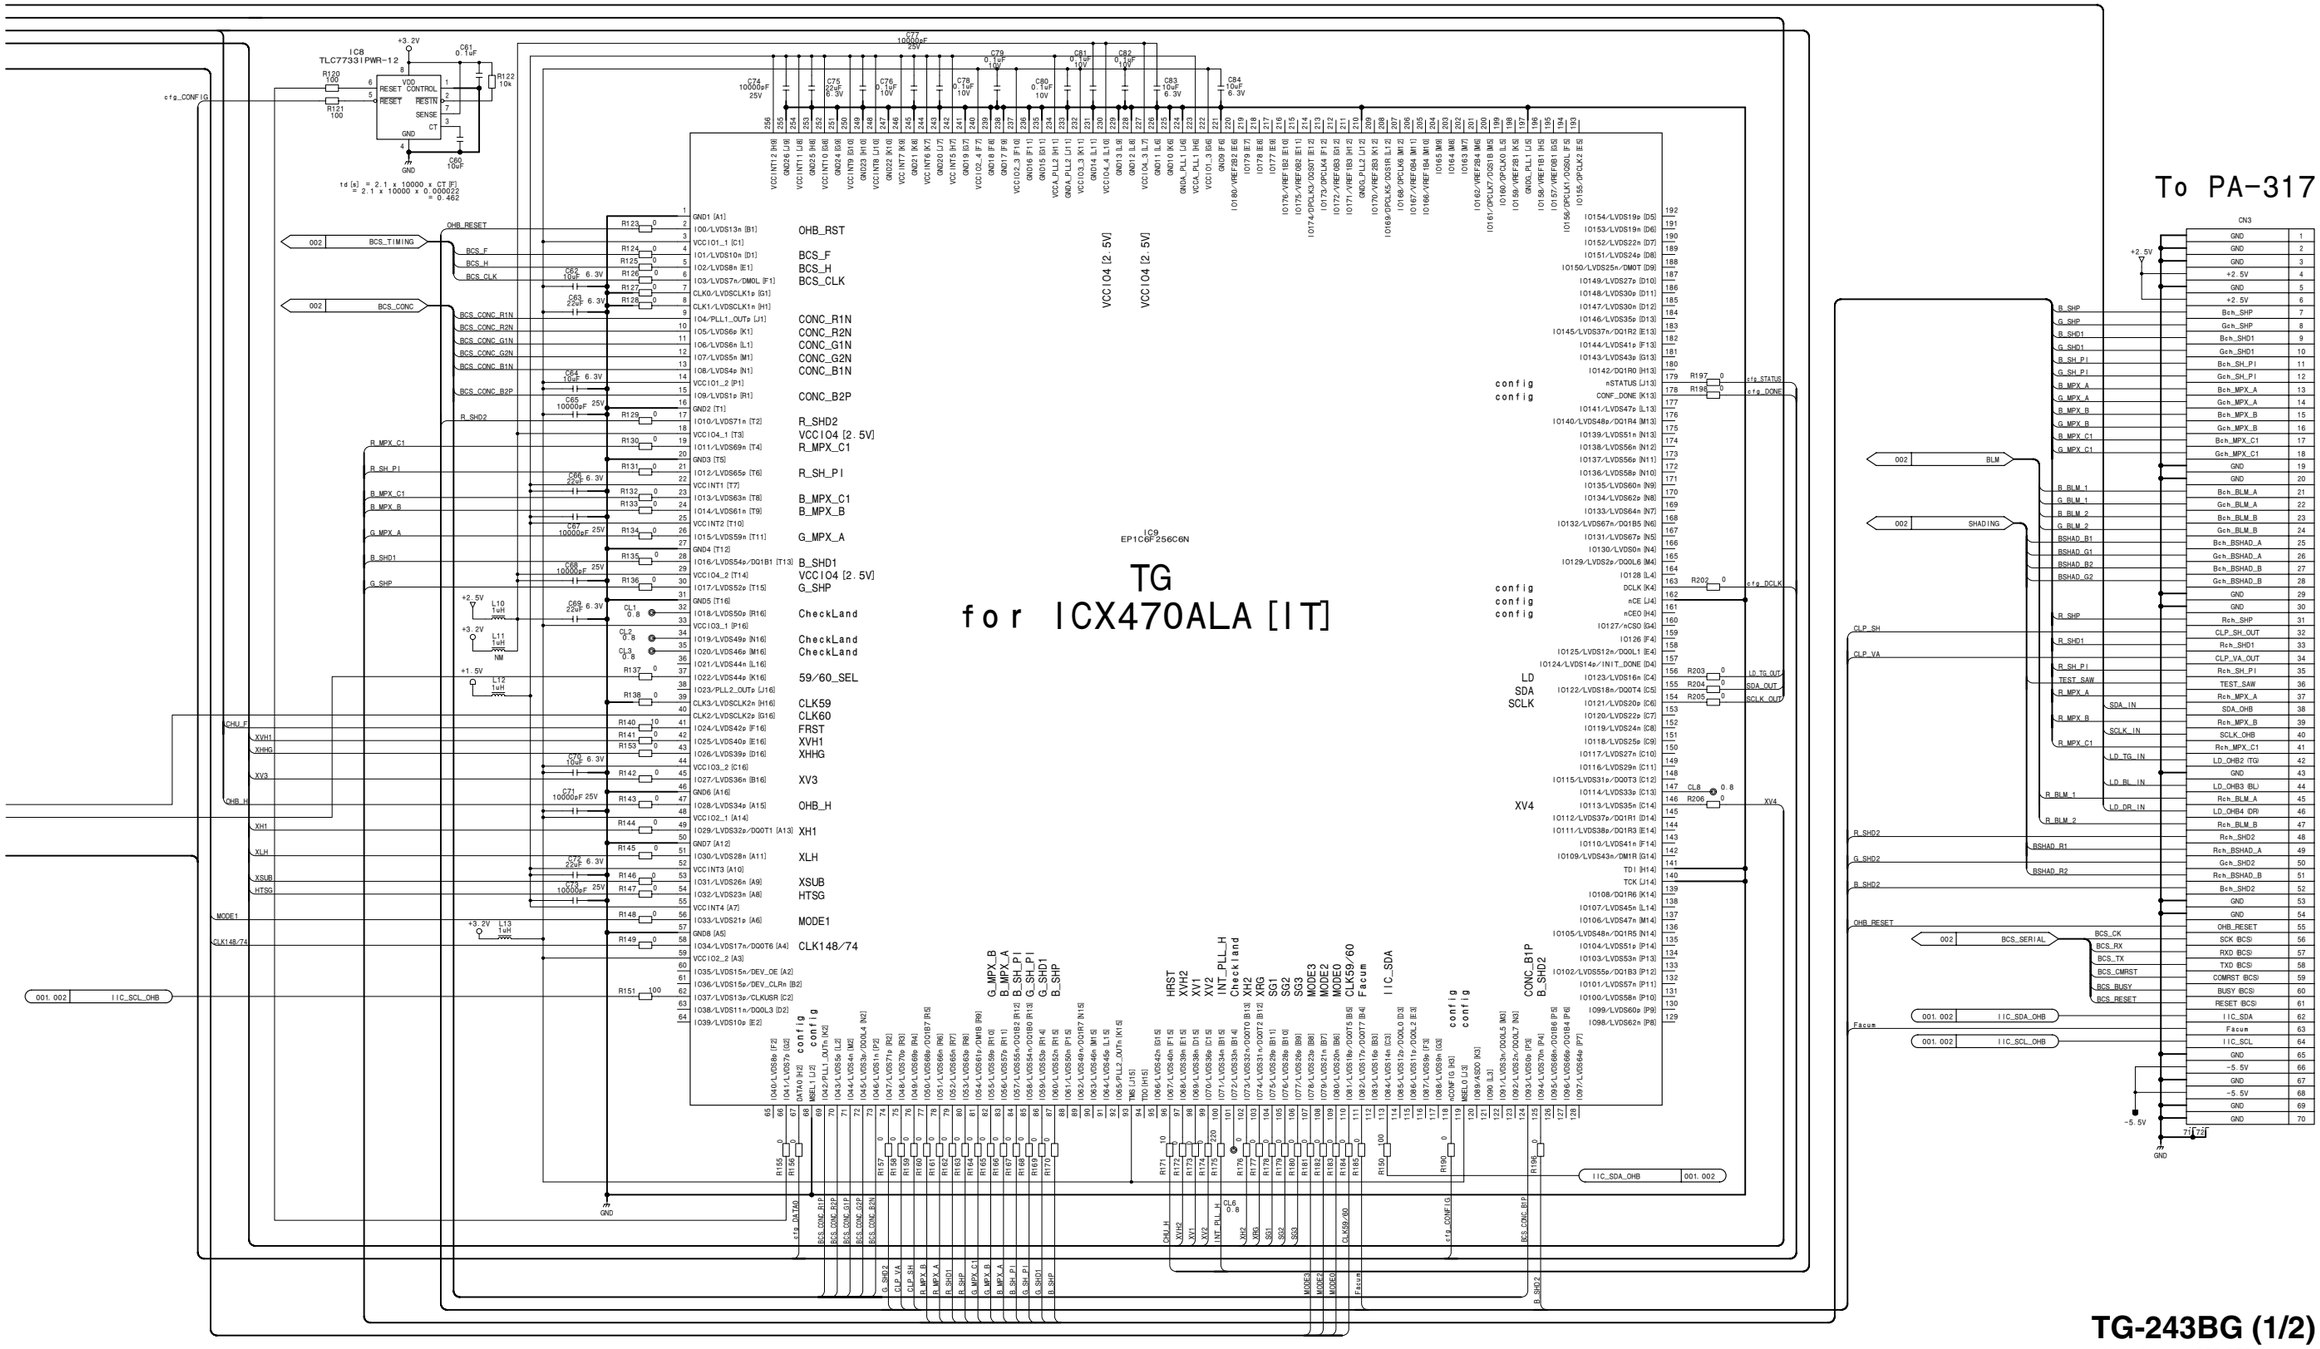


**TG-243BG (2/2)**
BOARD NO. 1-865-972-22
CAX-156_TG-243BG_001_2

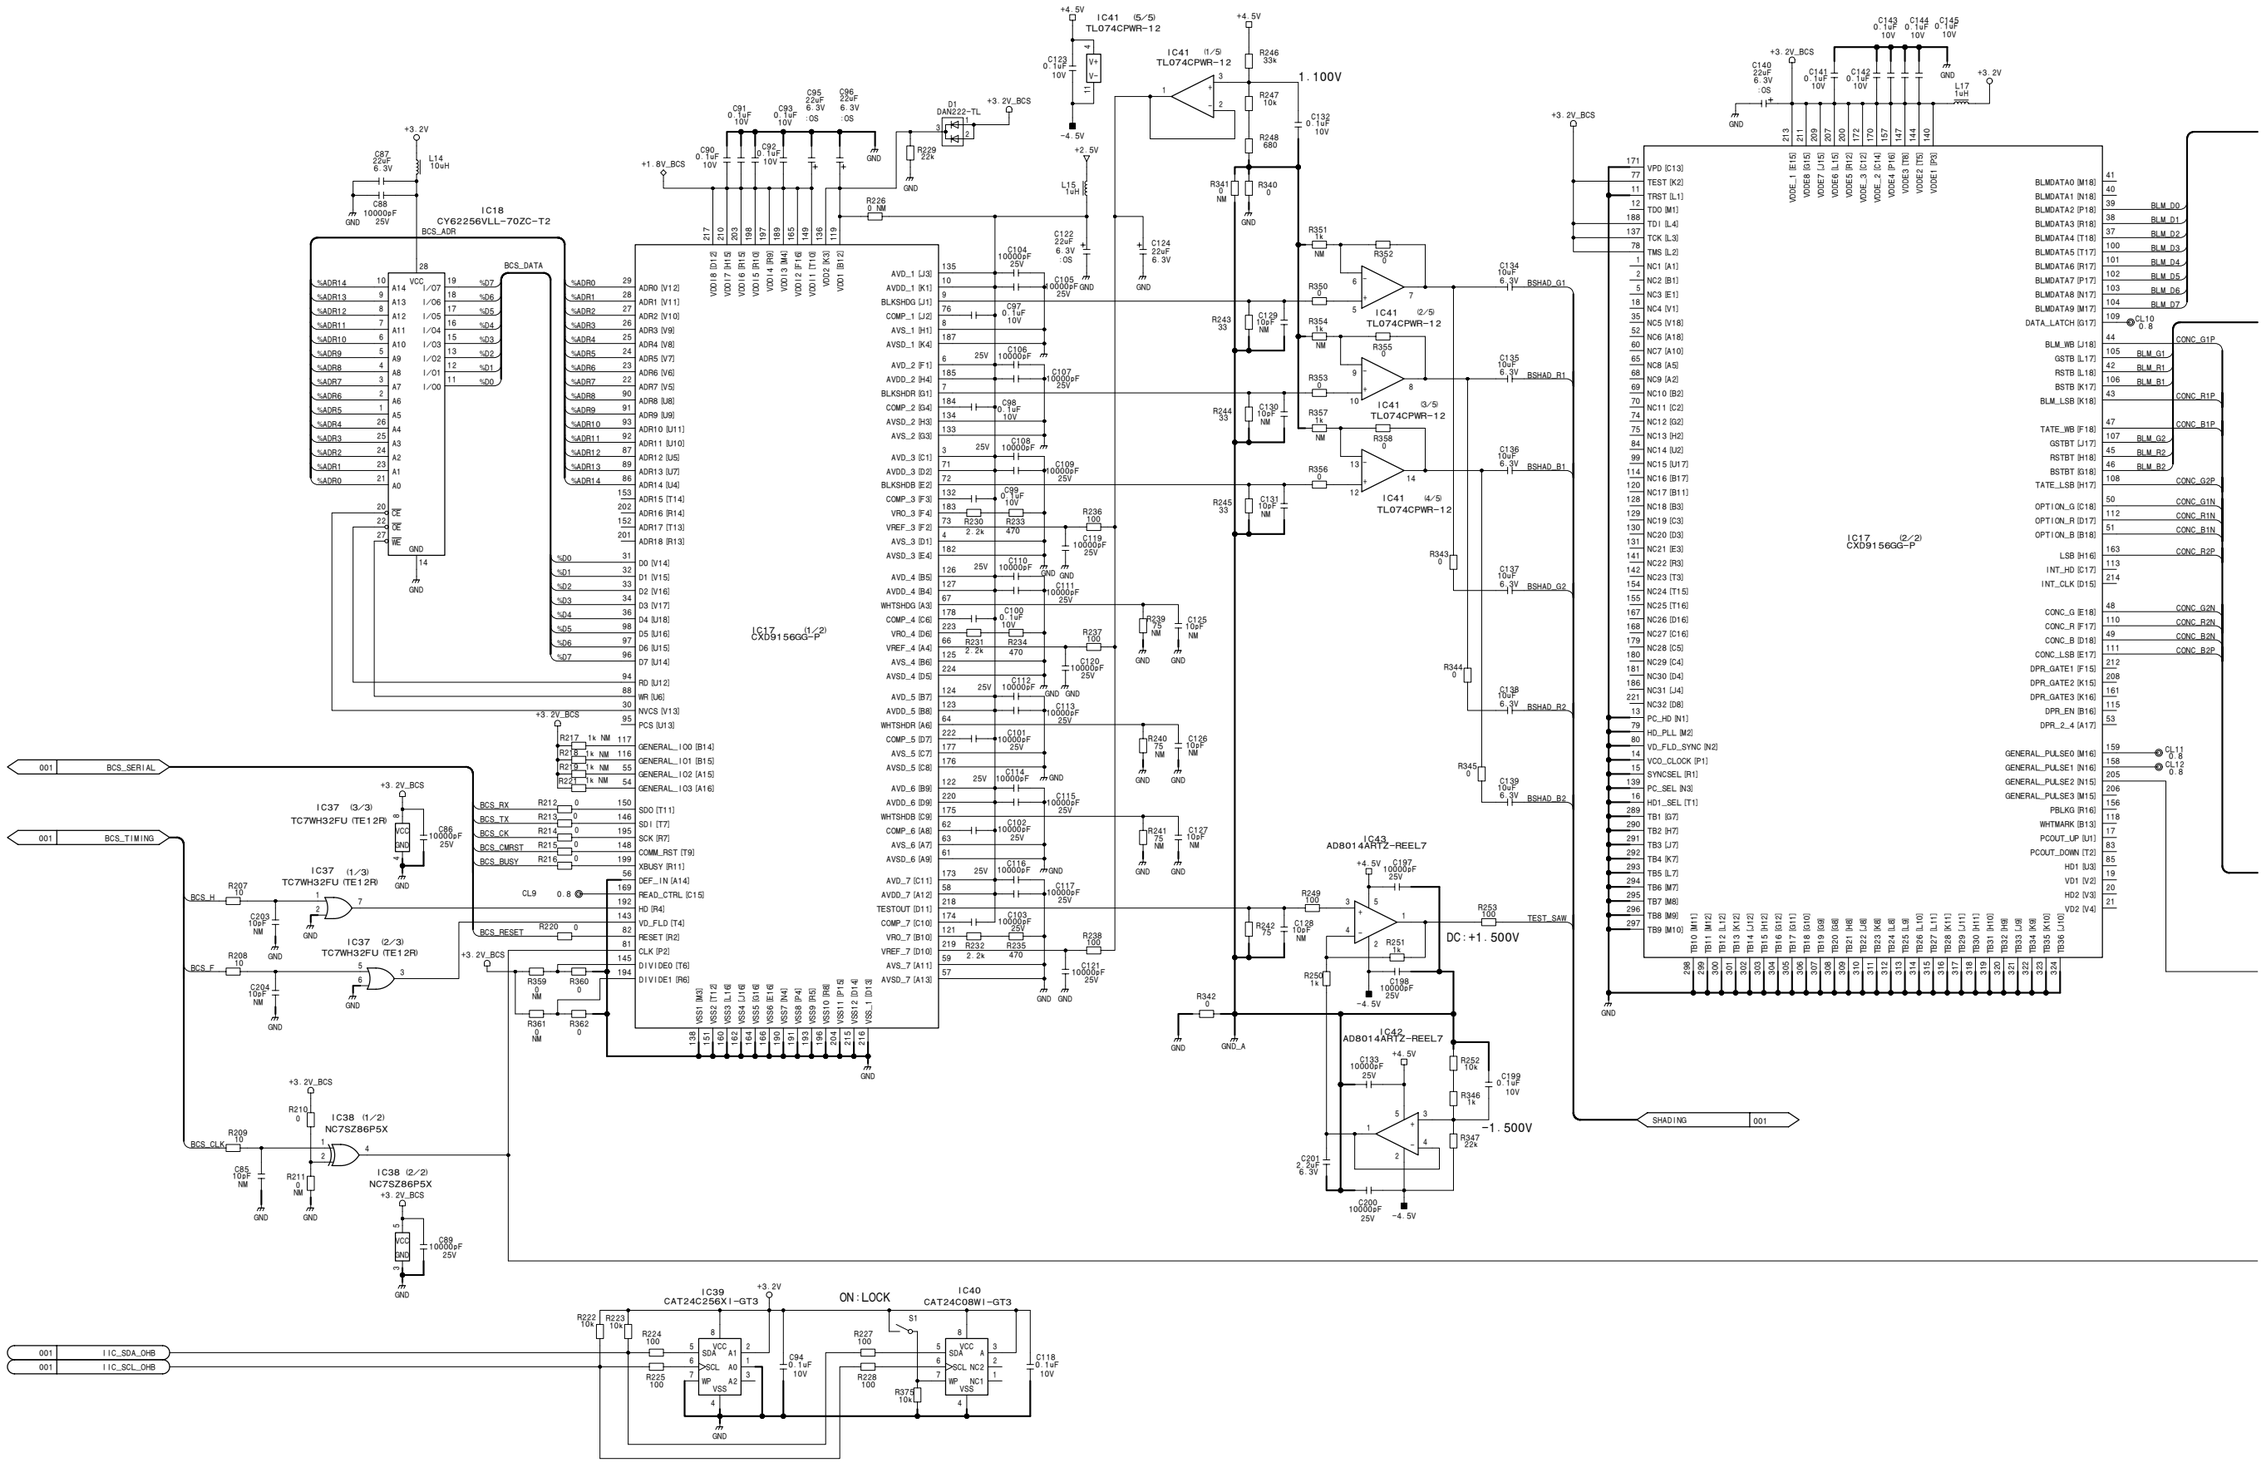TG-243BG (1/2)
SUFFIX: -23





4-120 (a)

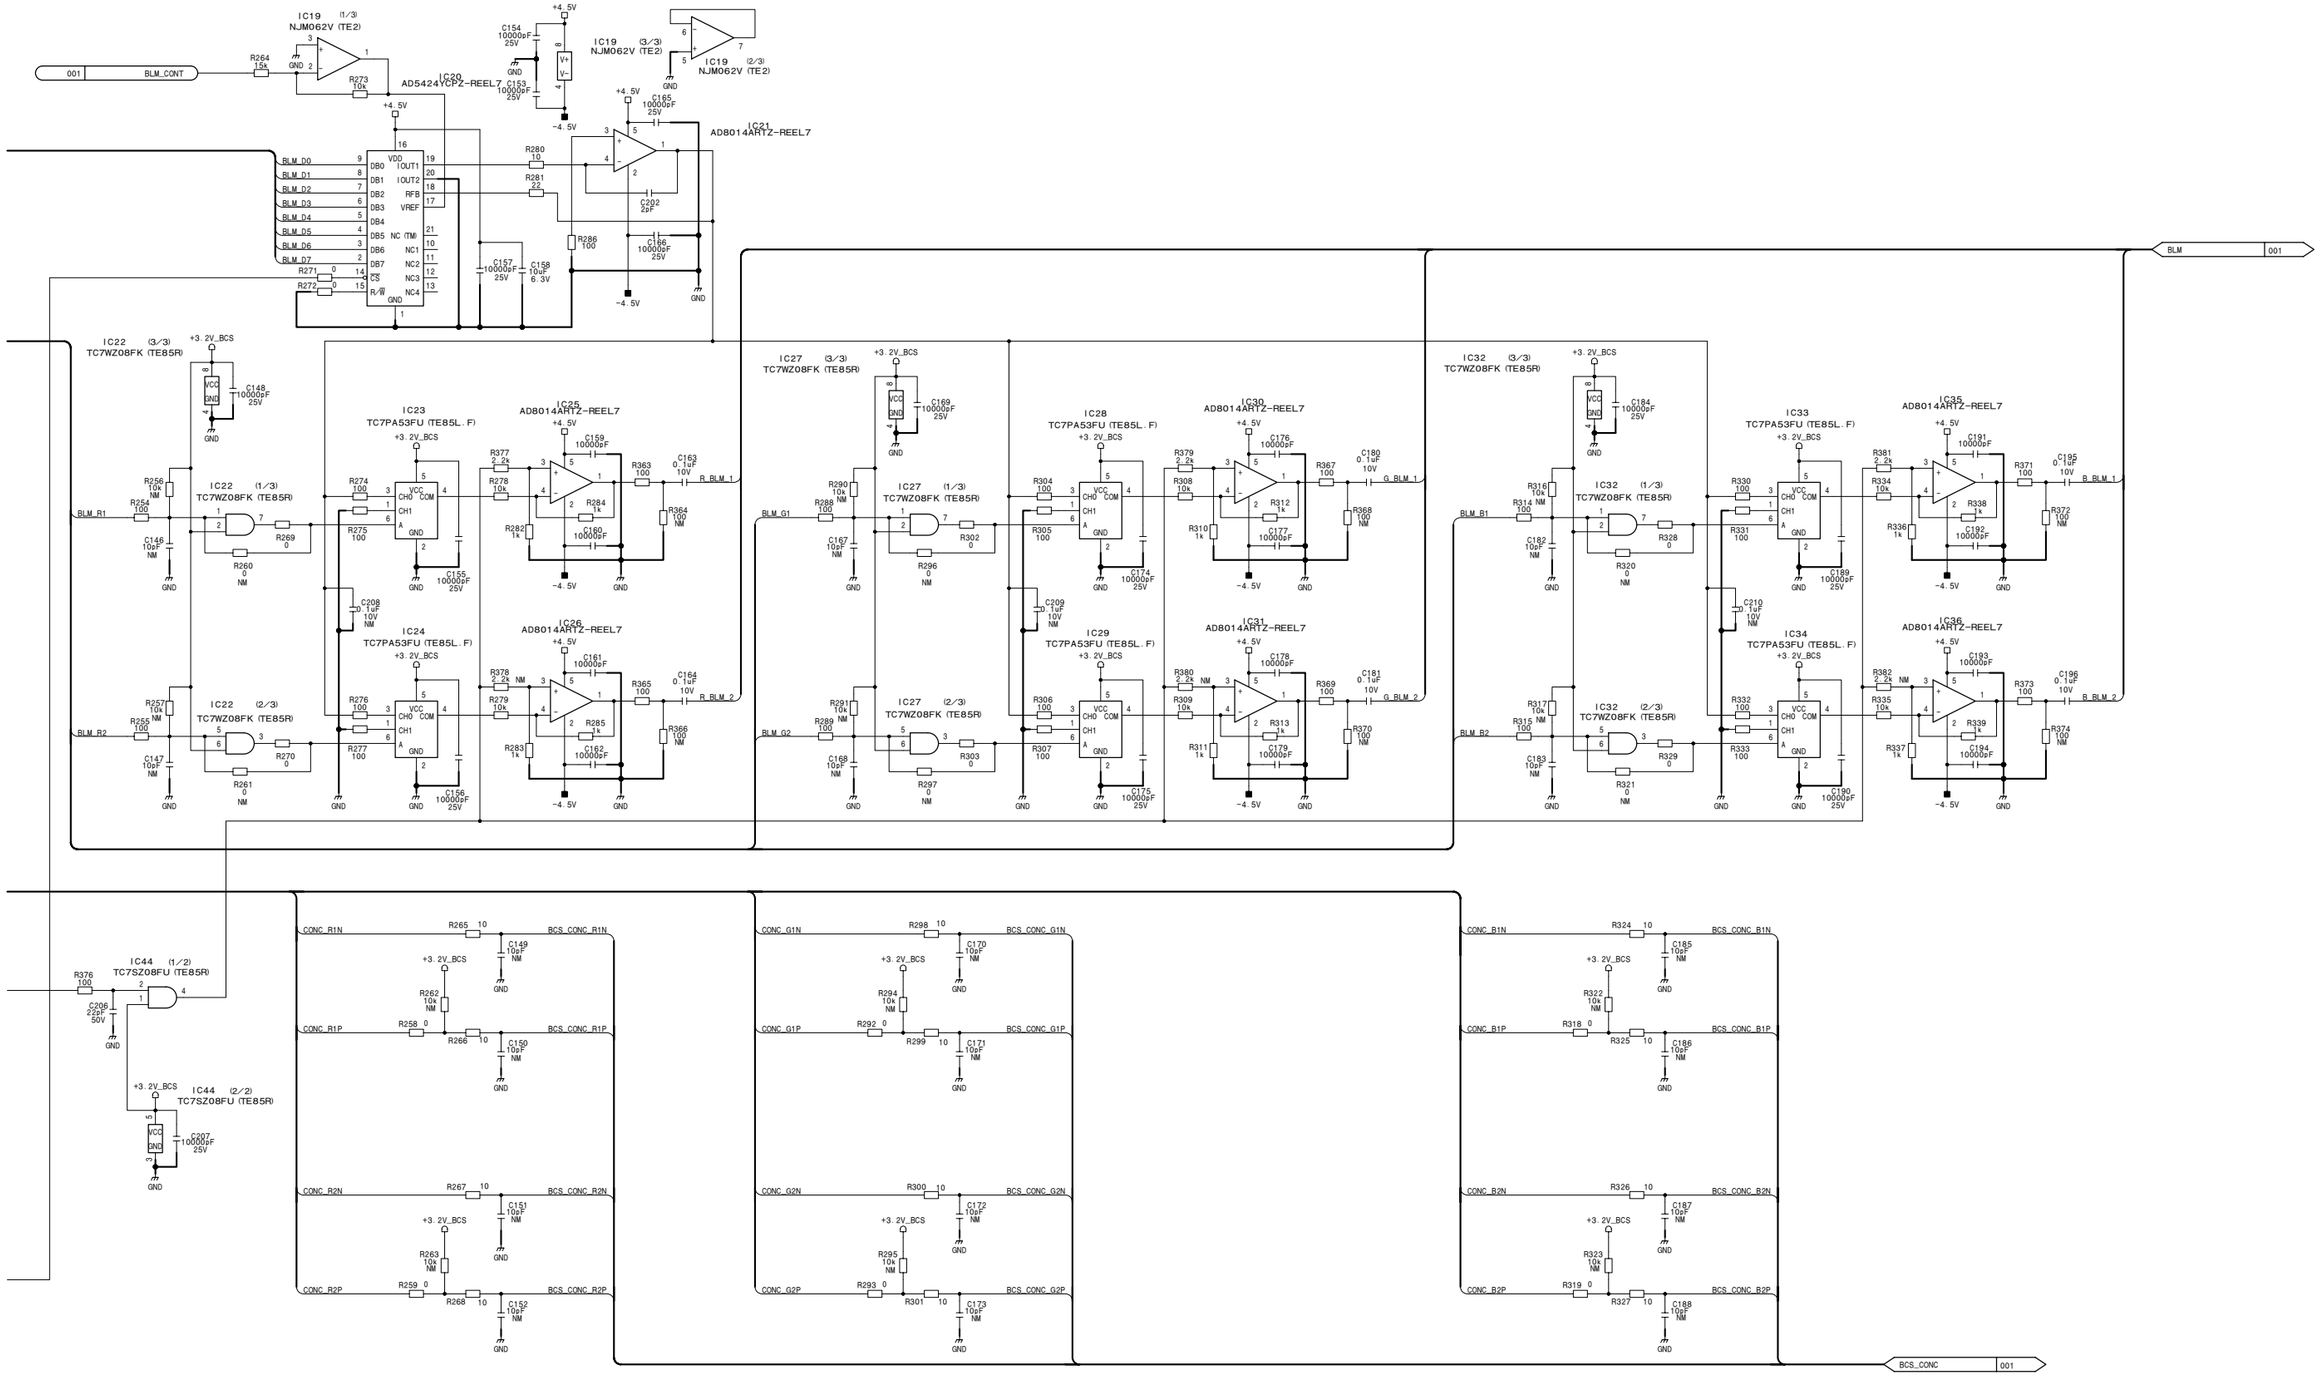TG-243BG (1/2)
SUFFIX: -23

# TG
# for ICX470ALA [IT]

IC9
EP1C6F256C6N

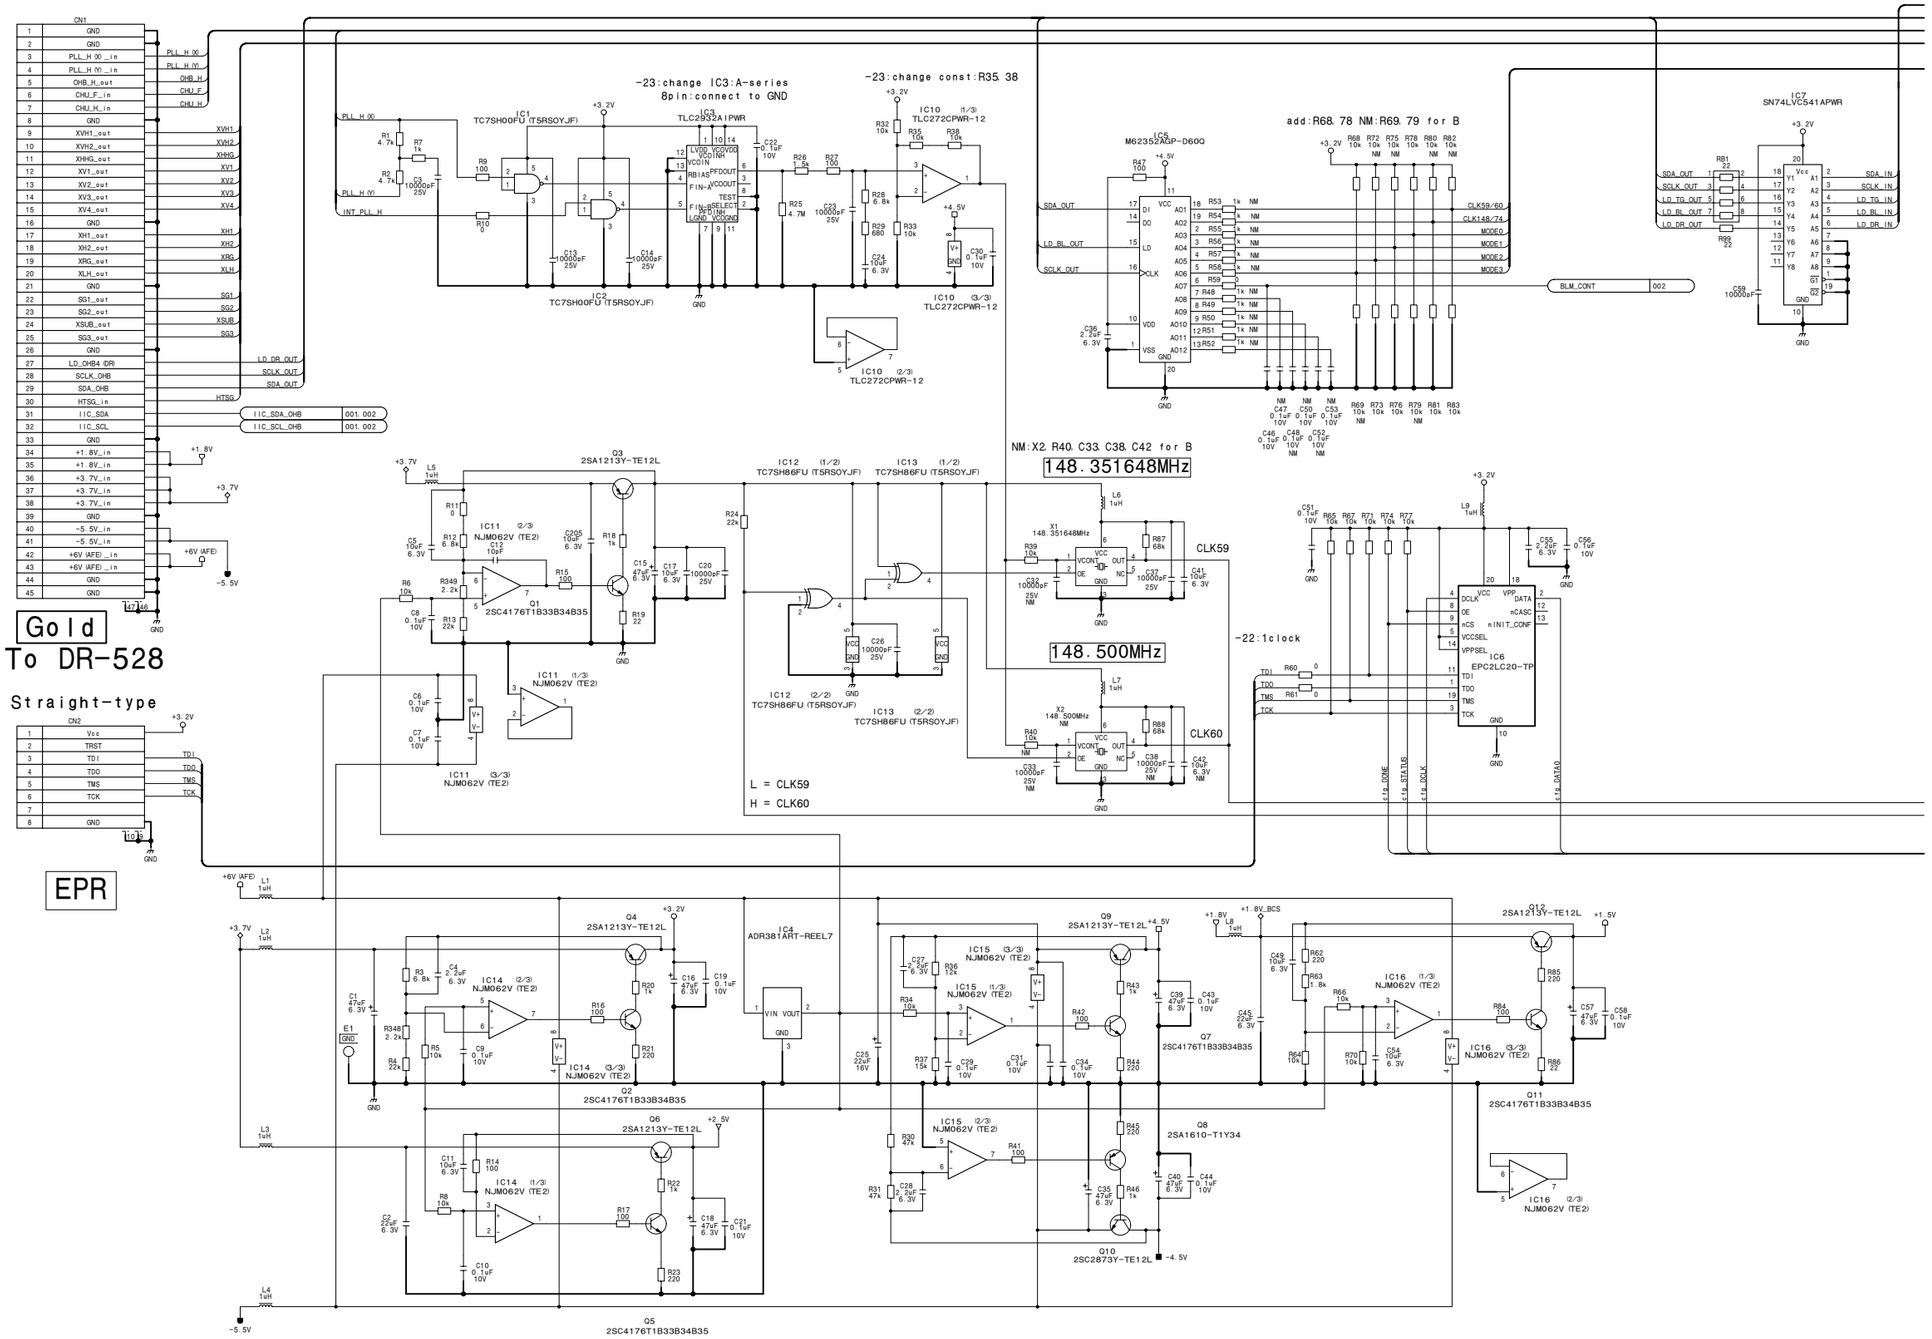IC8
TLC7703IPWR

VCCIO4 [2.5V]
VCCIO4 [2.5V]

To PA-317

-23:change IC8 threshold voltage 2.93V --> 2.63V

-22:1clock net-change R138 del R139

-23:add C211

-23:add C212



**TG-243BG (1/2)**
BOARD NO. 1-865-972-23
CAX-156_TG-243BG_001_1

**TG-243BG (2/2)** **SUFFIX: -23**




4-122 (a) 4-122 (a)

# TG-243BG (2/2)
**SUFFIX: -23**

TG-243BG (2/2)
SUFFIX: -23

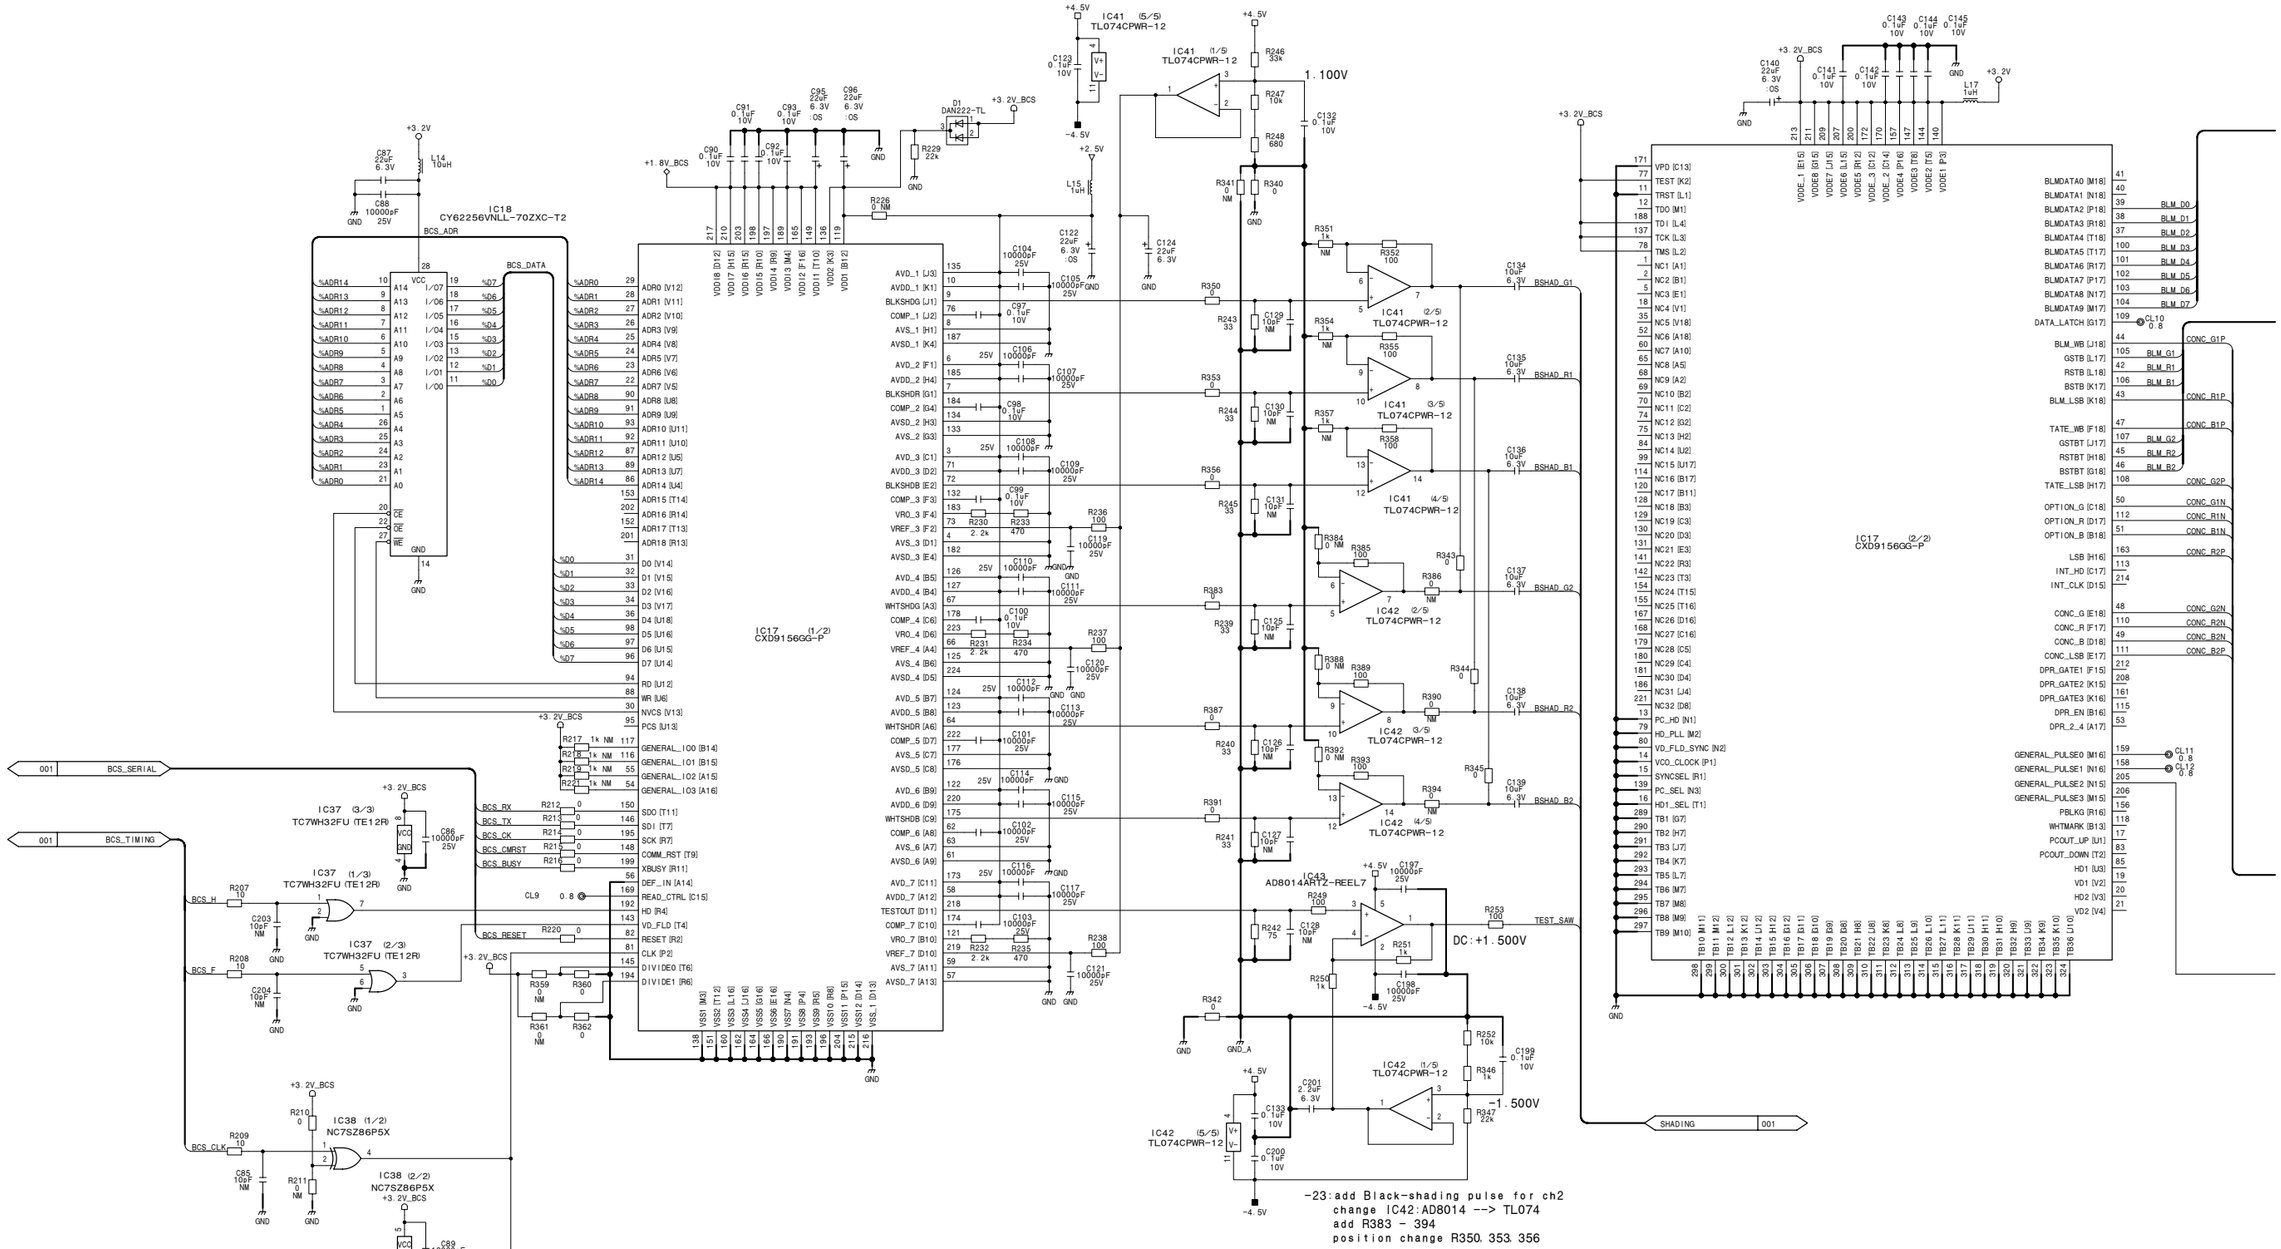


# TG-243BG (2/2)
BOARD NO. 1-865-972-23
CAX-156_TG-243BG_001_2

Gold
To DR-528

Straight-type

EPR

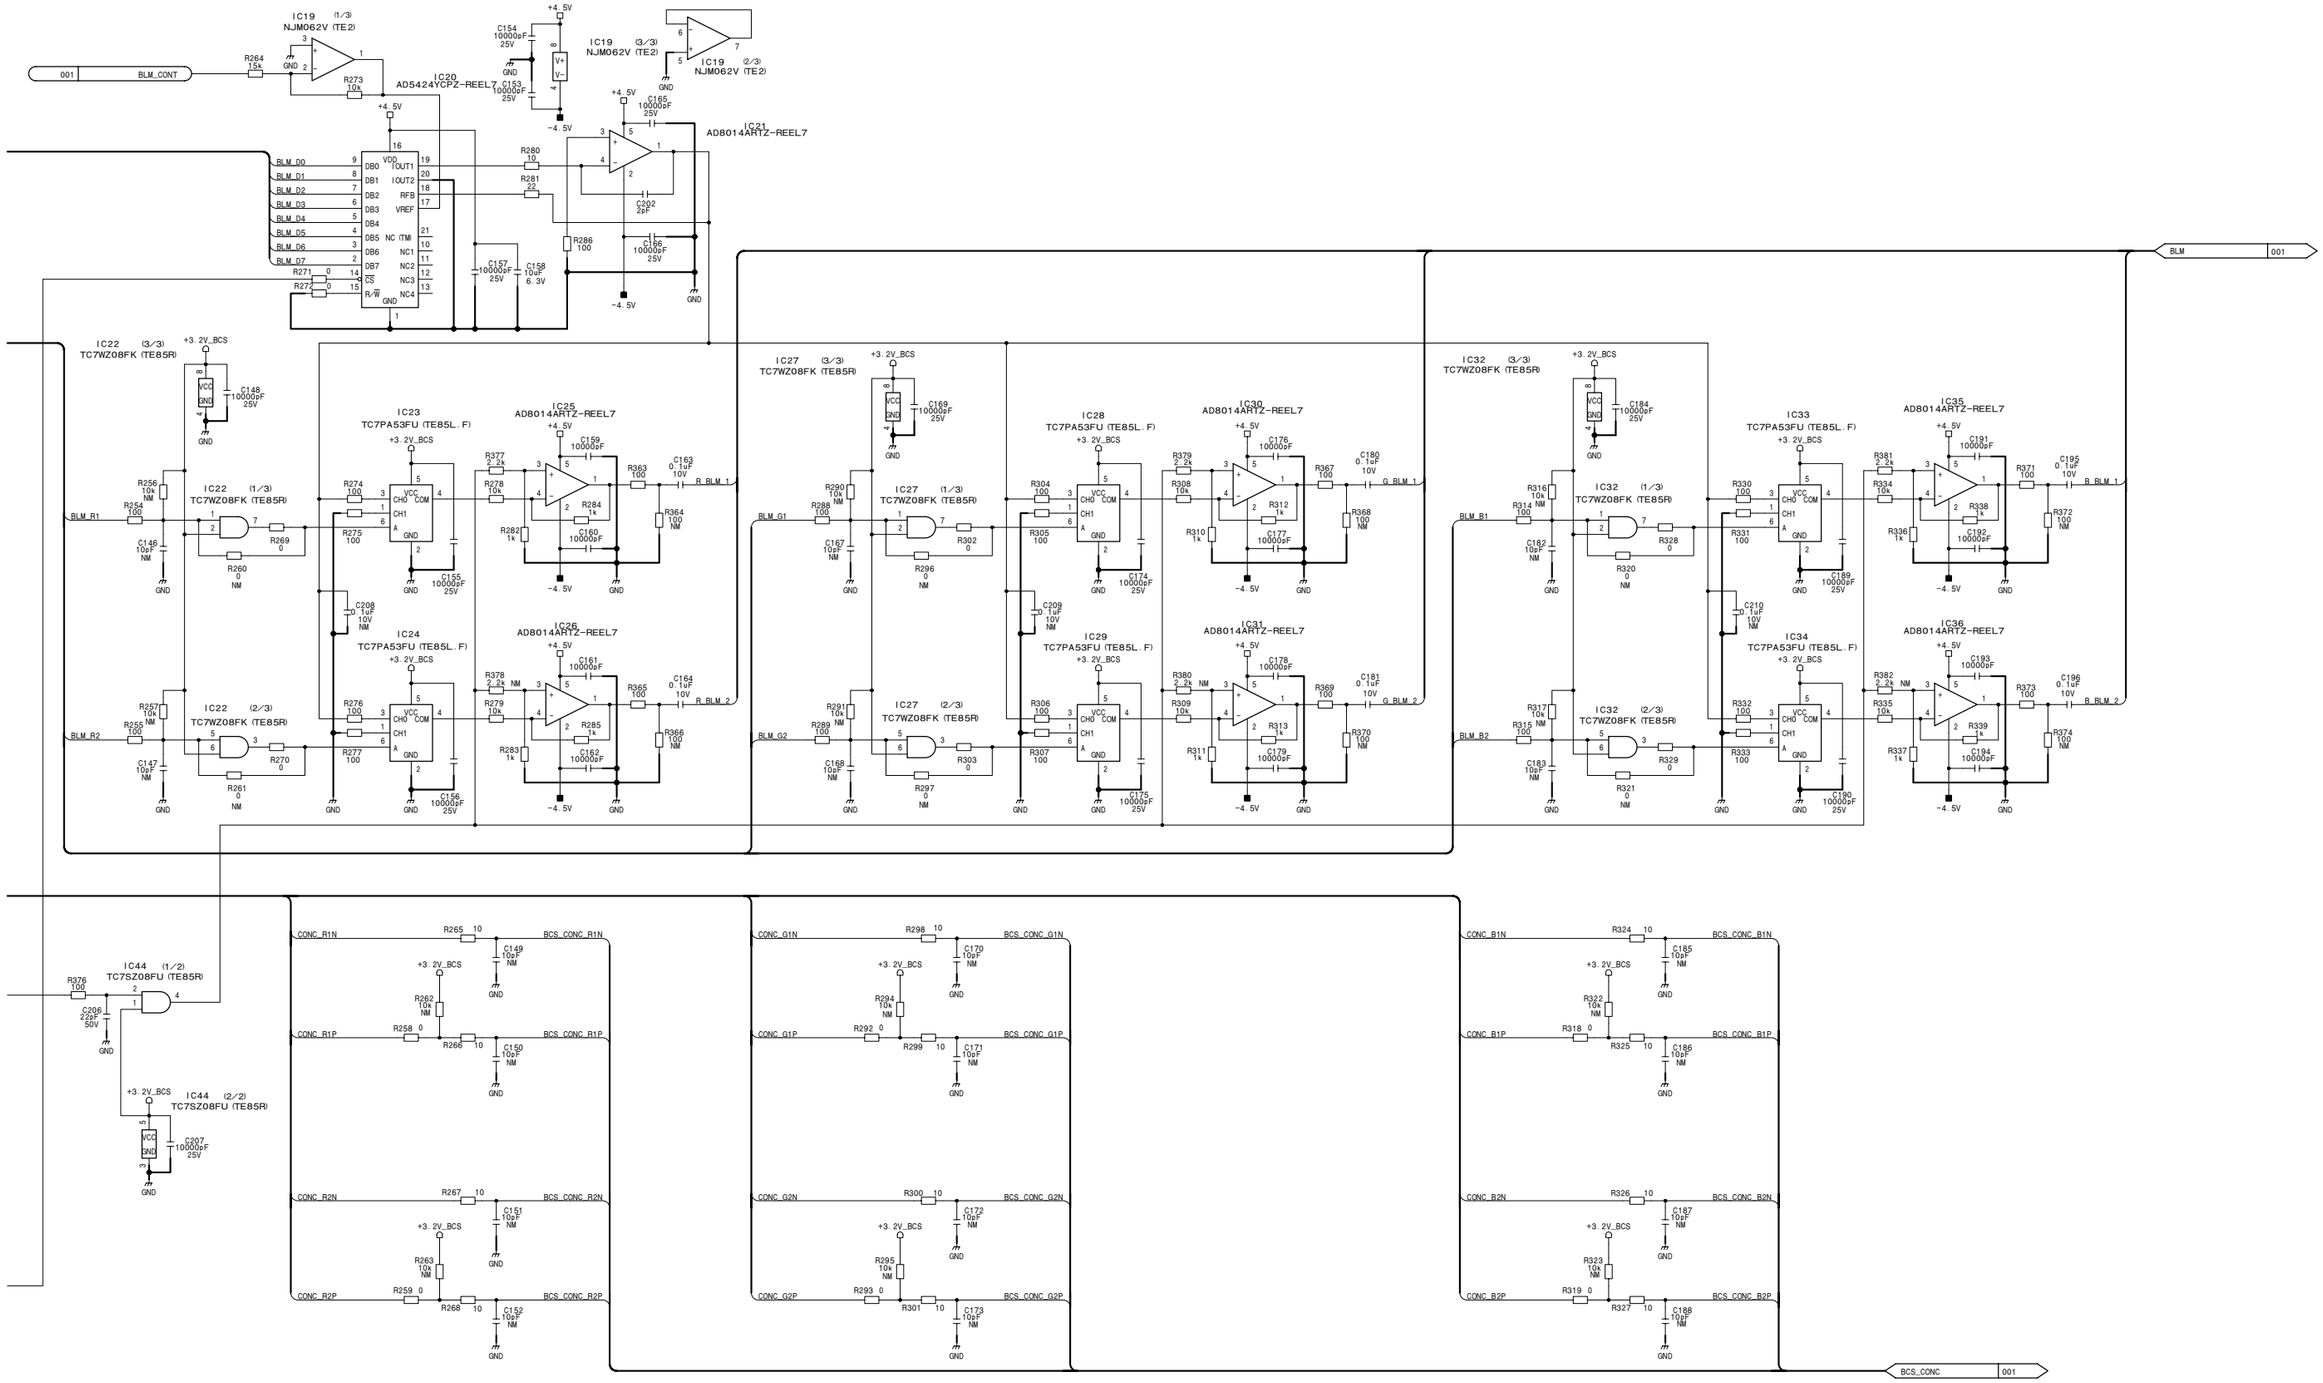148.351648MHz

148.500MHz

L = CLK59
H = CLK60

*NOTE

| REF. NO. | SUFFIX -21 | SUFFIX 22- |
|---|---|---|
| L6 | NM | 1.0uH |
| R87 | NM | 68k |

TG-243C (1/2) SUFFIX: -21, 22



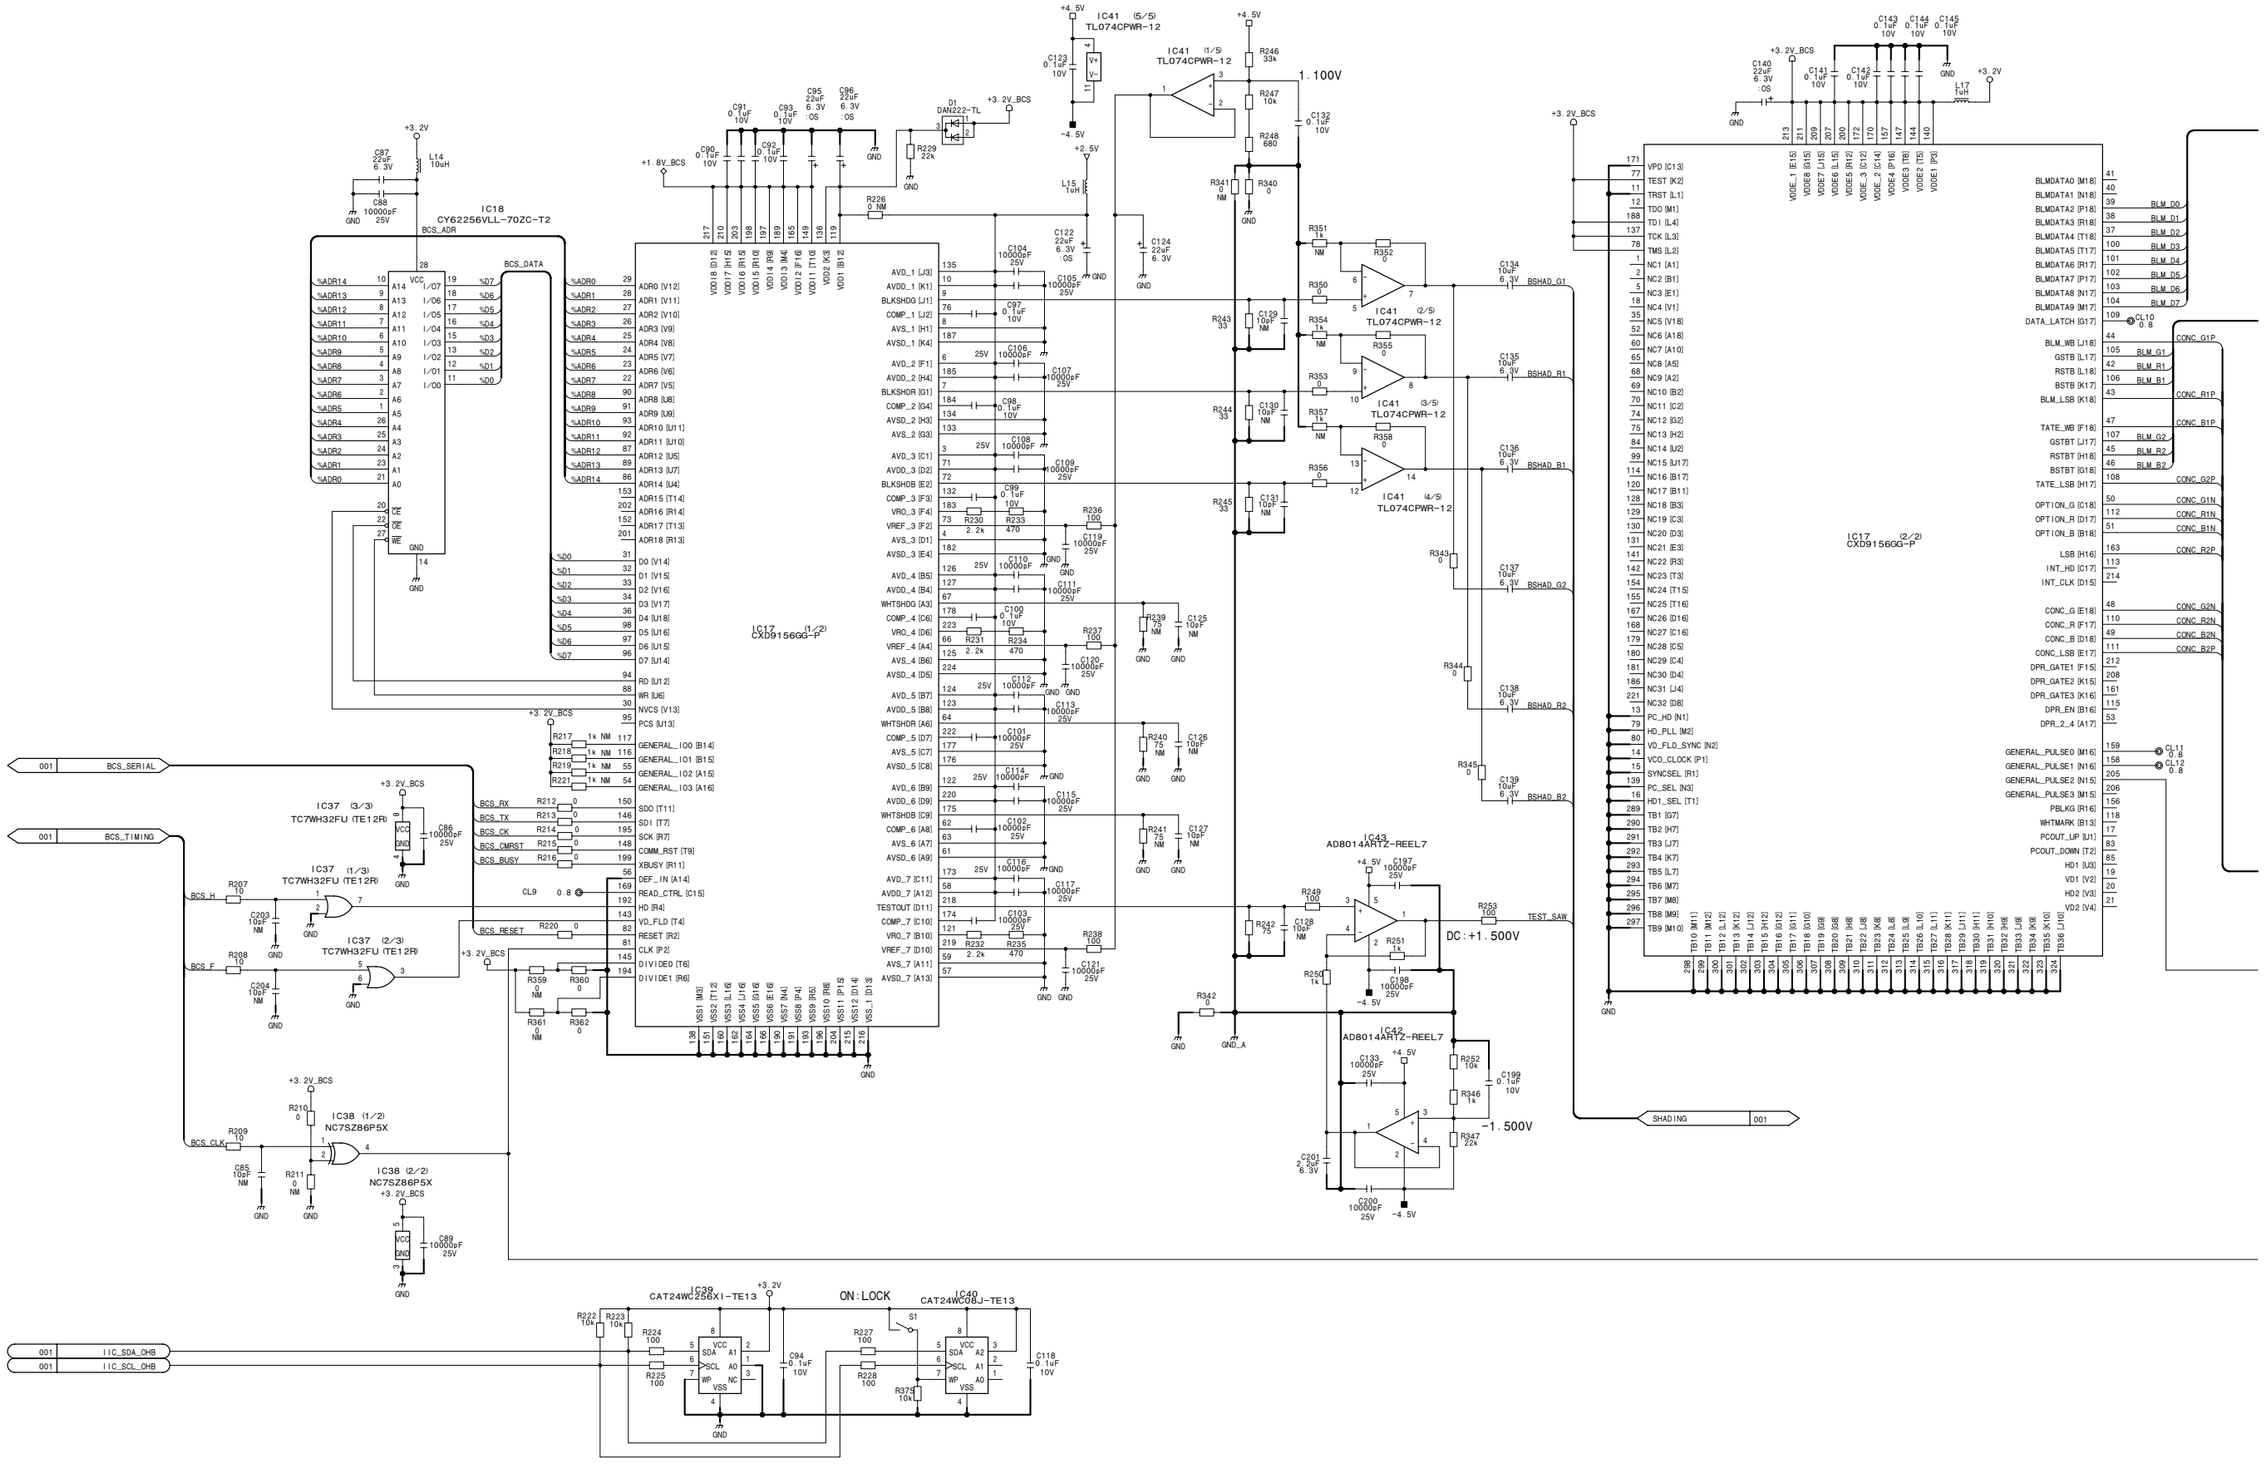
IC18 CY62256VLL-70ZC-T2
IC17 CXD9156GG-P (1/2)
IC17 CXD9156GG-P (2/2)
IC41 TL074CPWR-12
IC42 AD8014ART2-REEL7
IC37 TC7WH32FU (TE12R)
IC38 NC7SZ86P5X
IC39 CAT24WC256XI-TE13
IC40 CAT24WC08J-TE13
+3.2V
+4.5V
+2.5V
+1.8V_BCS
+3.2V_BCS
-4.5V
1.100V
DC:+1.500V
-1.500V
ON:LOCK
BCS_ADR
BCS_DATA
BCS_SERIAL
BCS_TIMING
IIC_SDA_OHB
IIC_SCL_OHB
BSHAD_G1
BSHAD_R1
BSHAD_B1
BSHAD_G2
BSHAD_R2
BSHAD_B2
TEST_SAW
SHADING
BLM_D0
BLM_D1
BLM_D2
BLM_D3
BLM_D4
BLM_D5
BLM_D6
BLM_D7
BLM_G1
BLM_R1
BLM_B1
BLM_G2
BLM_R2
BLM_B2
CONC_G1P
CONC_R1P
CONC_B1P
CONC_G2P
CONC_G1N
CONC_R1N
CONC_B1N
CONC_R2P
CONC_G2N
CONC_R2N
CONC_B2N
CONC_R2P

TG-243C (2/2)
SUFFIX: -21, 22




**TG-243C (2/2)**
BOARD NO. 1-865-972-21, 22
HDC-1500_TG-243CG_021_2


CN1
GND
PLL_H (X) _in
PLL_H (Y) _in
CHB_H_out
CHJ_F_in
CHJ_H_in
XVH1_out
XVH2_out
XHHG_out
XV1_out
XV2_out
XV3_out
XV4_out
XH1_out
XH2_out
XRG_out
XLH_out
SG1_out
SG2_out
XSUB_out
SG3_out
LD_CHB4 (OR)
SCLK_CHB
SDA_CHB
HTSG_in
IIC_SDA
IIC_SCL
+1.8V_in
+3.7V_in
+6V (AFE) _in
-5.5V_in
IIC_SDA_CHB 001.002
IIC_SCL_CHB 001.002
Gold
To DR-528
Straight-type
CN2
Vcc
TRST
TDI
TDO
TMS
TCK
EPR
-23:change IC3:A-series
8pin:connect to GND
-23:change const:R35 38
IC1 TC7SH00FU (T5RSOYJF)
IC2 TC7SH00FU (T5RSOYJF)
IC3 TLC2932AIPWR
IC10 (1/3) TLC272CPWR-12
IC10 (2/3) TLC272CPWR-12
IC10 (3/3) TLC272CPWR-12
IC5 M62352AGP-D60Q
add:R72. R82. NM:R73. R83 for CN
IC7 SN74LVC541APWR
BLM_CONT 002
NM:IC13. X1. R39. C32. C37. C41 for CN
148.351648MHz
148.500MHz
CLK59
CLK60
L = CLK59
H = CLK60
-22:1clock
IC6 EPC2LC20-TP
Q3 2SA1213Y-TE12L
IC11 NJM062V (TE2)
IC12 (1/2) TC7SH86FU (T5RSOYJF)
IC13 (1/2) TC7SH86FU (T5RSOYJF)
IC12 (2/2) TC7SH86FU (T5RSOYJF)
IC13 (2/2) TC7SH86FU (T5RSOYJF)
Q1 2SC4176T1B33B34B35
Q4 2SA1213Y-TE12L
Q2 2SC4176T1B33B34B35
Q6 2SA1213Y-TE12L
Q5 2SC4176T1B33B34B35
IC4 ADR381ART-REEL7
Q9 2SA1213Y-TE12L
Q7 2SC4176T1B33B34B35
Q8 2SA1610-T1Y34
Q10 2SC2873Y-TE12L
Q12 2SA1213Y-TE12L
Q11 2SC4176T1B33B34B35
IC14 NJM062V (TE2)
IC15 NJM062V (TE2)
IC16 NJM062V (TE2)
+3.7V
+3.2V
+2.5V
+1.8V
+1.8V_BCS
+4.5V
+1.5V
-4.5V
-5.5V
+6V (AFE)
GND

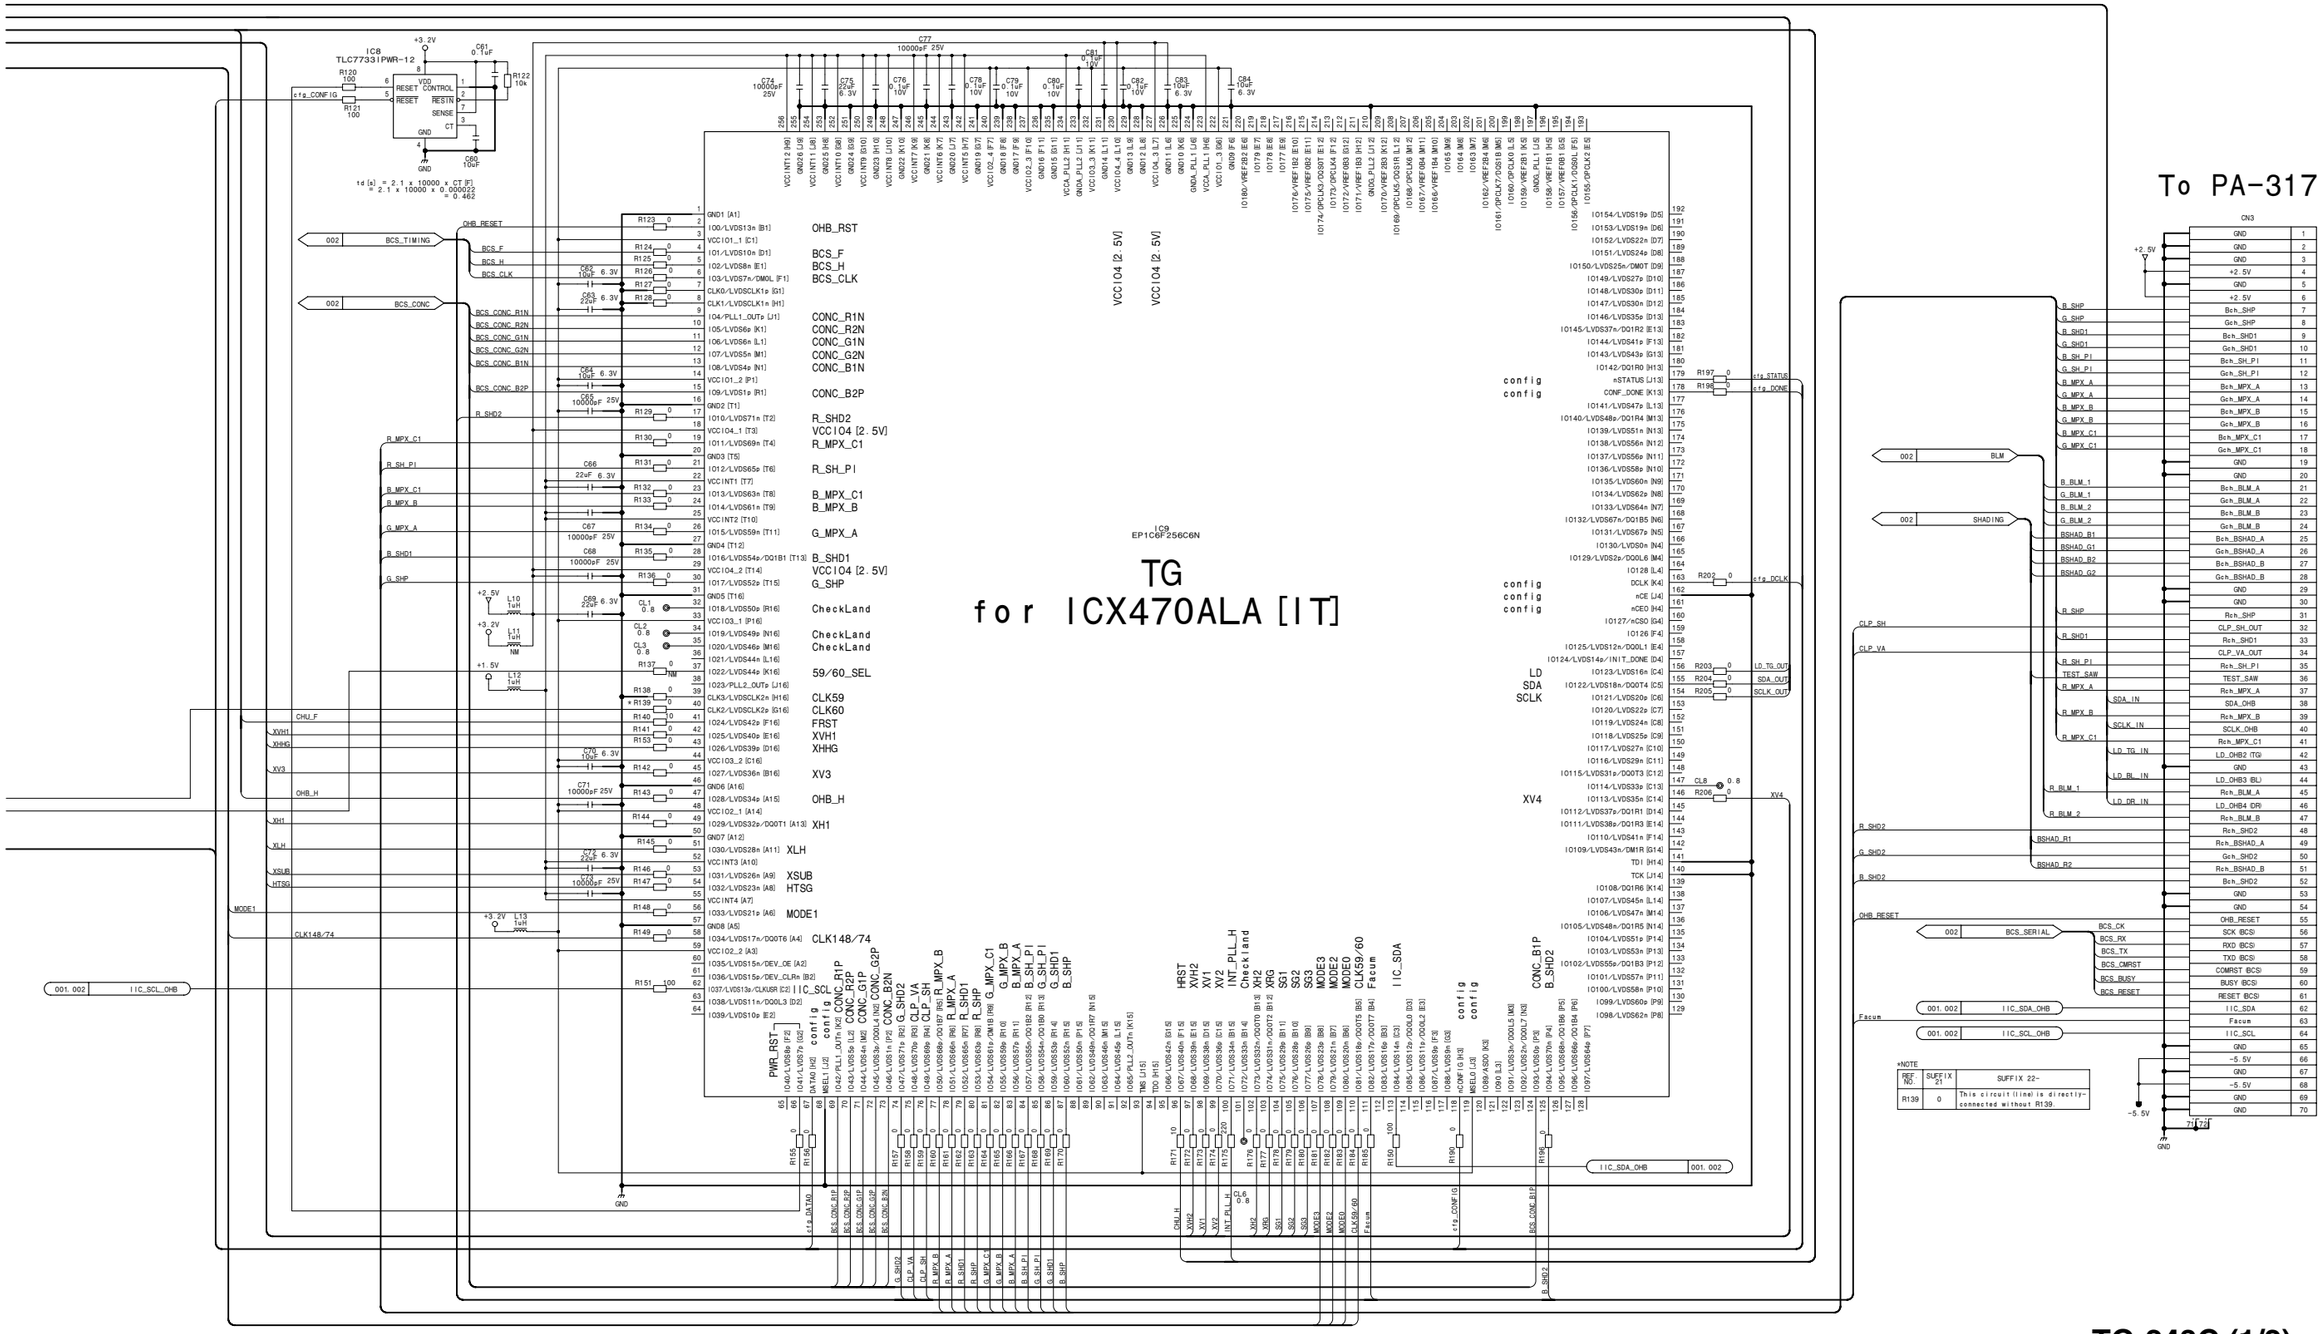TG-243C (1/2)
SUFFIX: -23

# TG
# for ICX470ALA [IT]

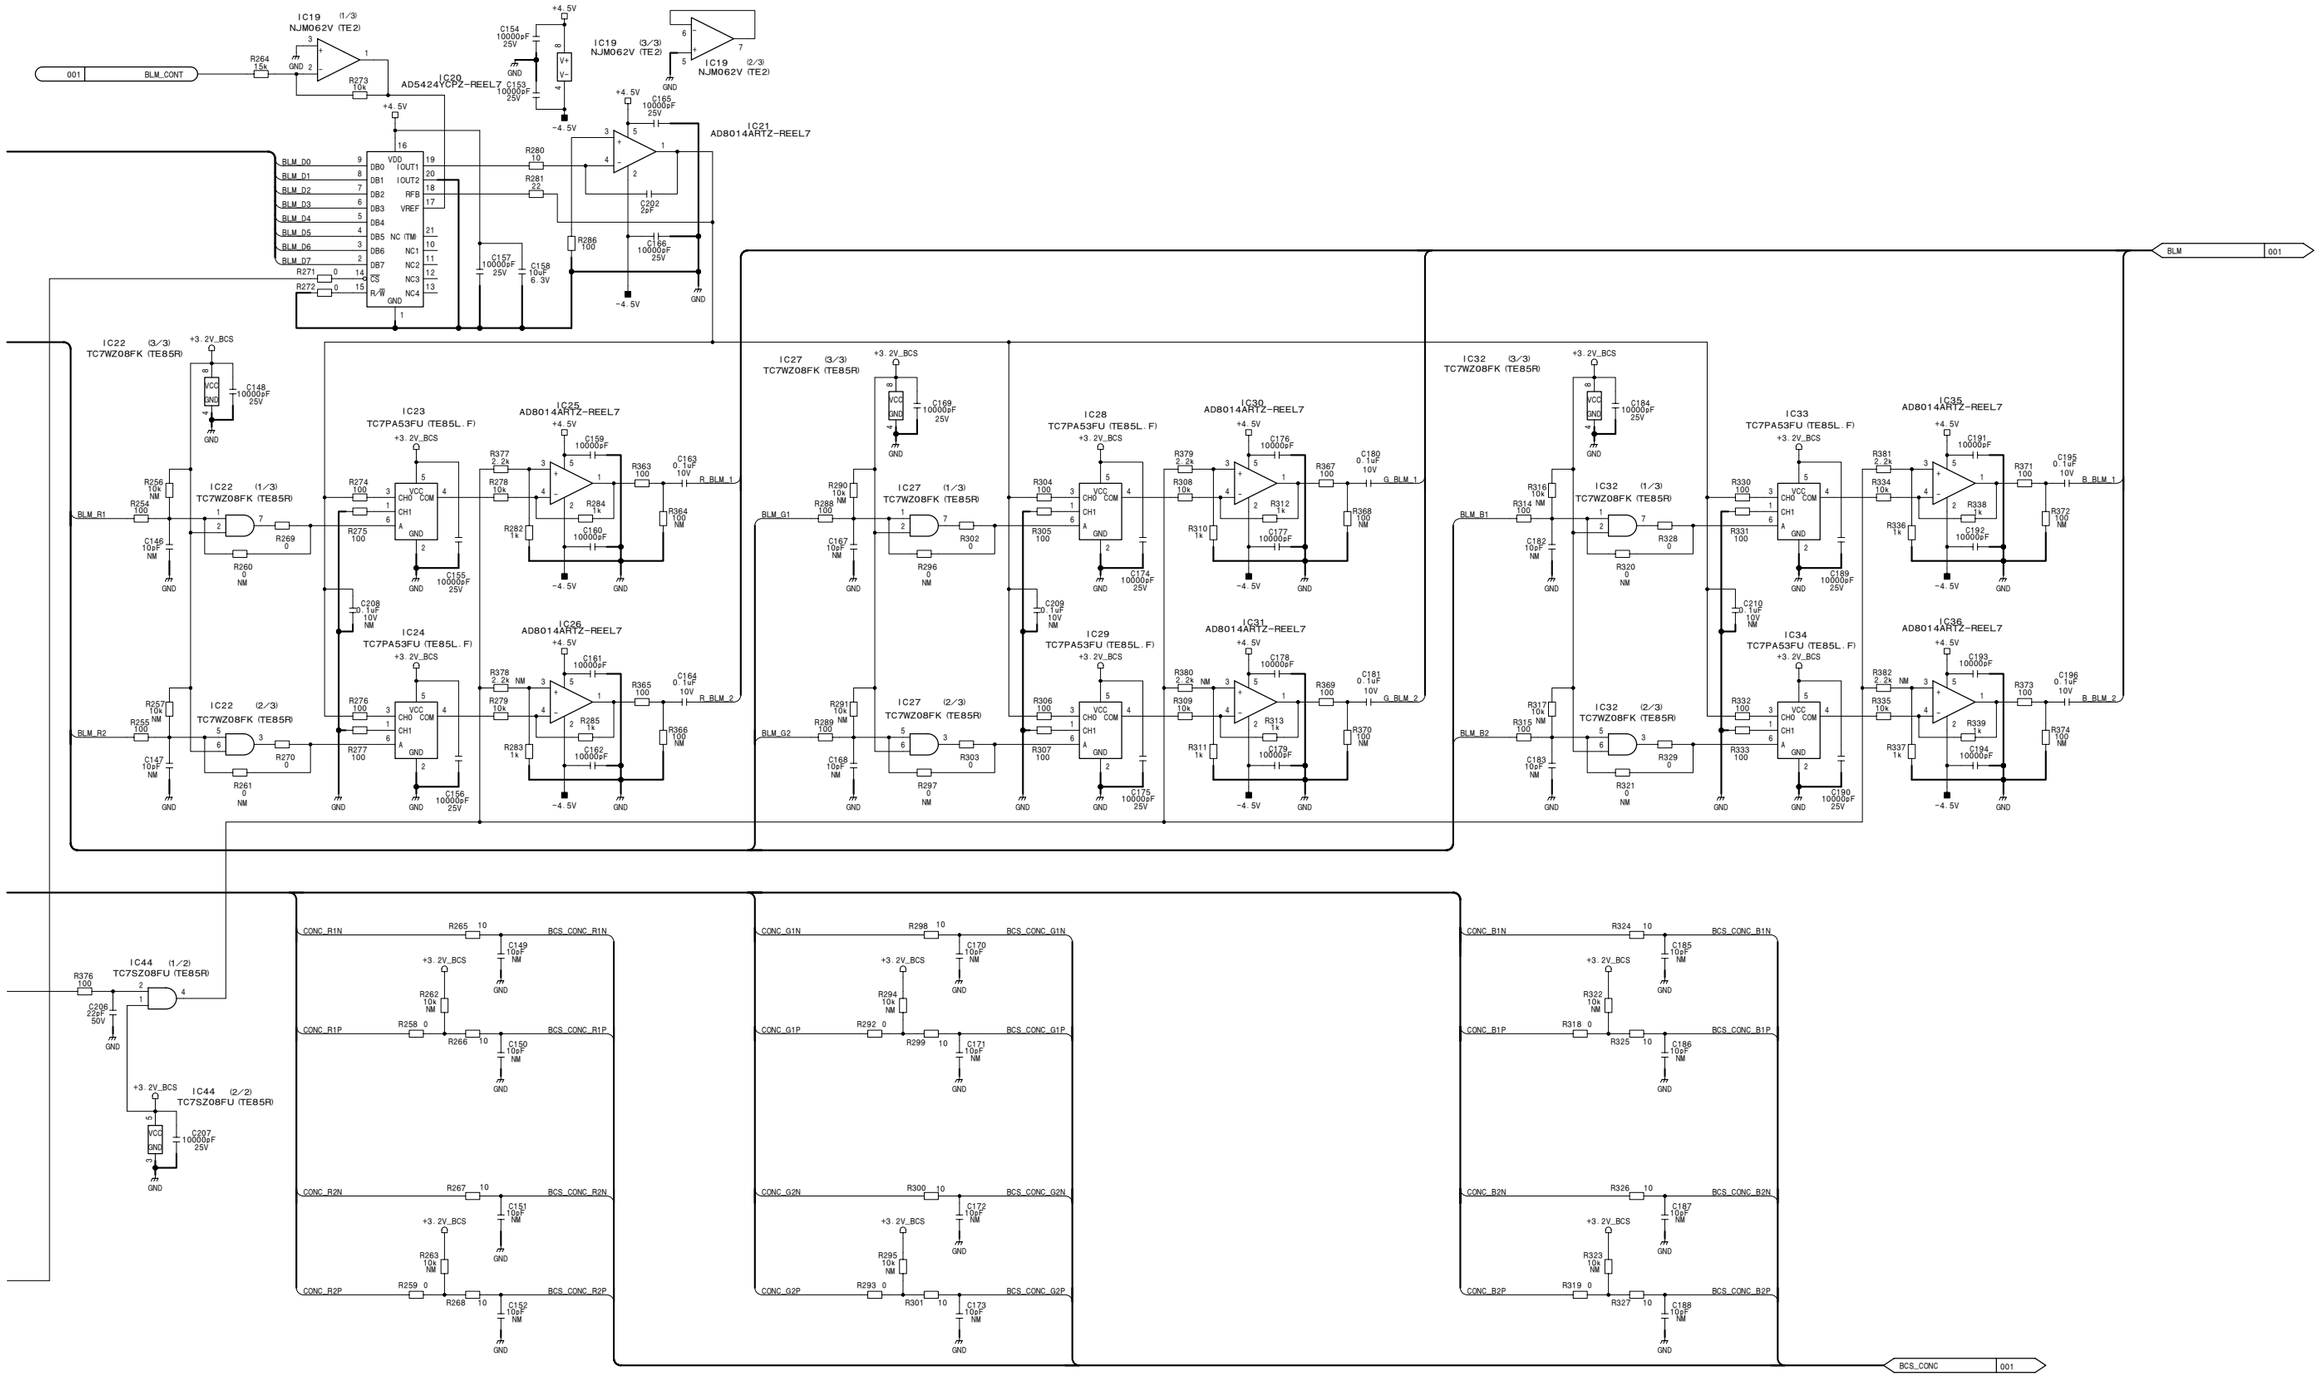IC9
EP1C6F256C6N

-22:1clock
net-change R138
del R139

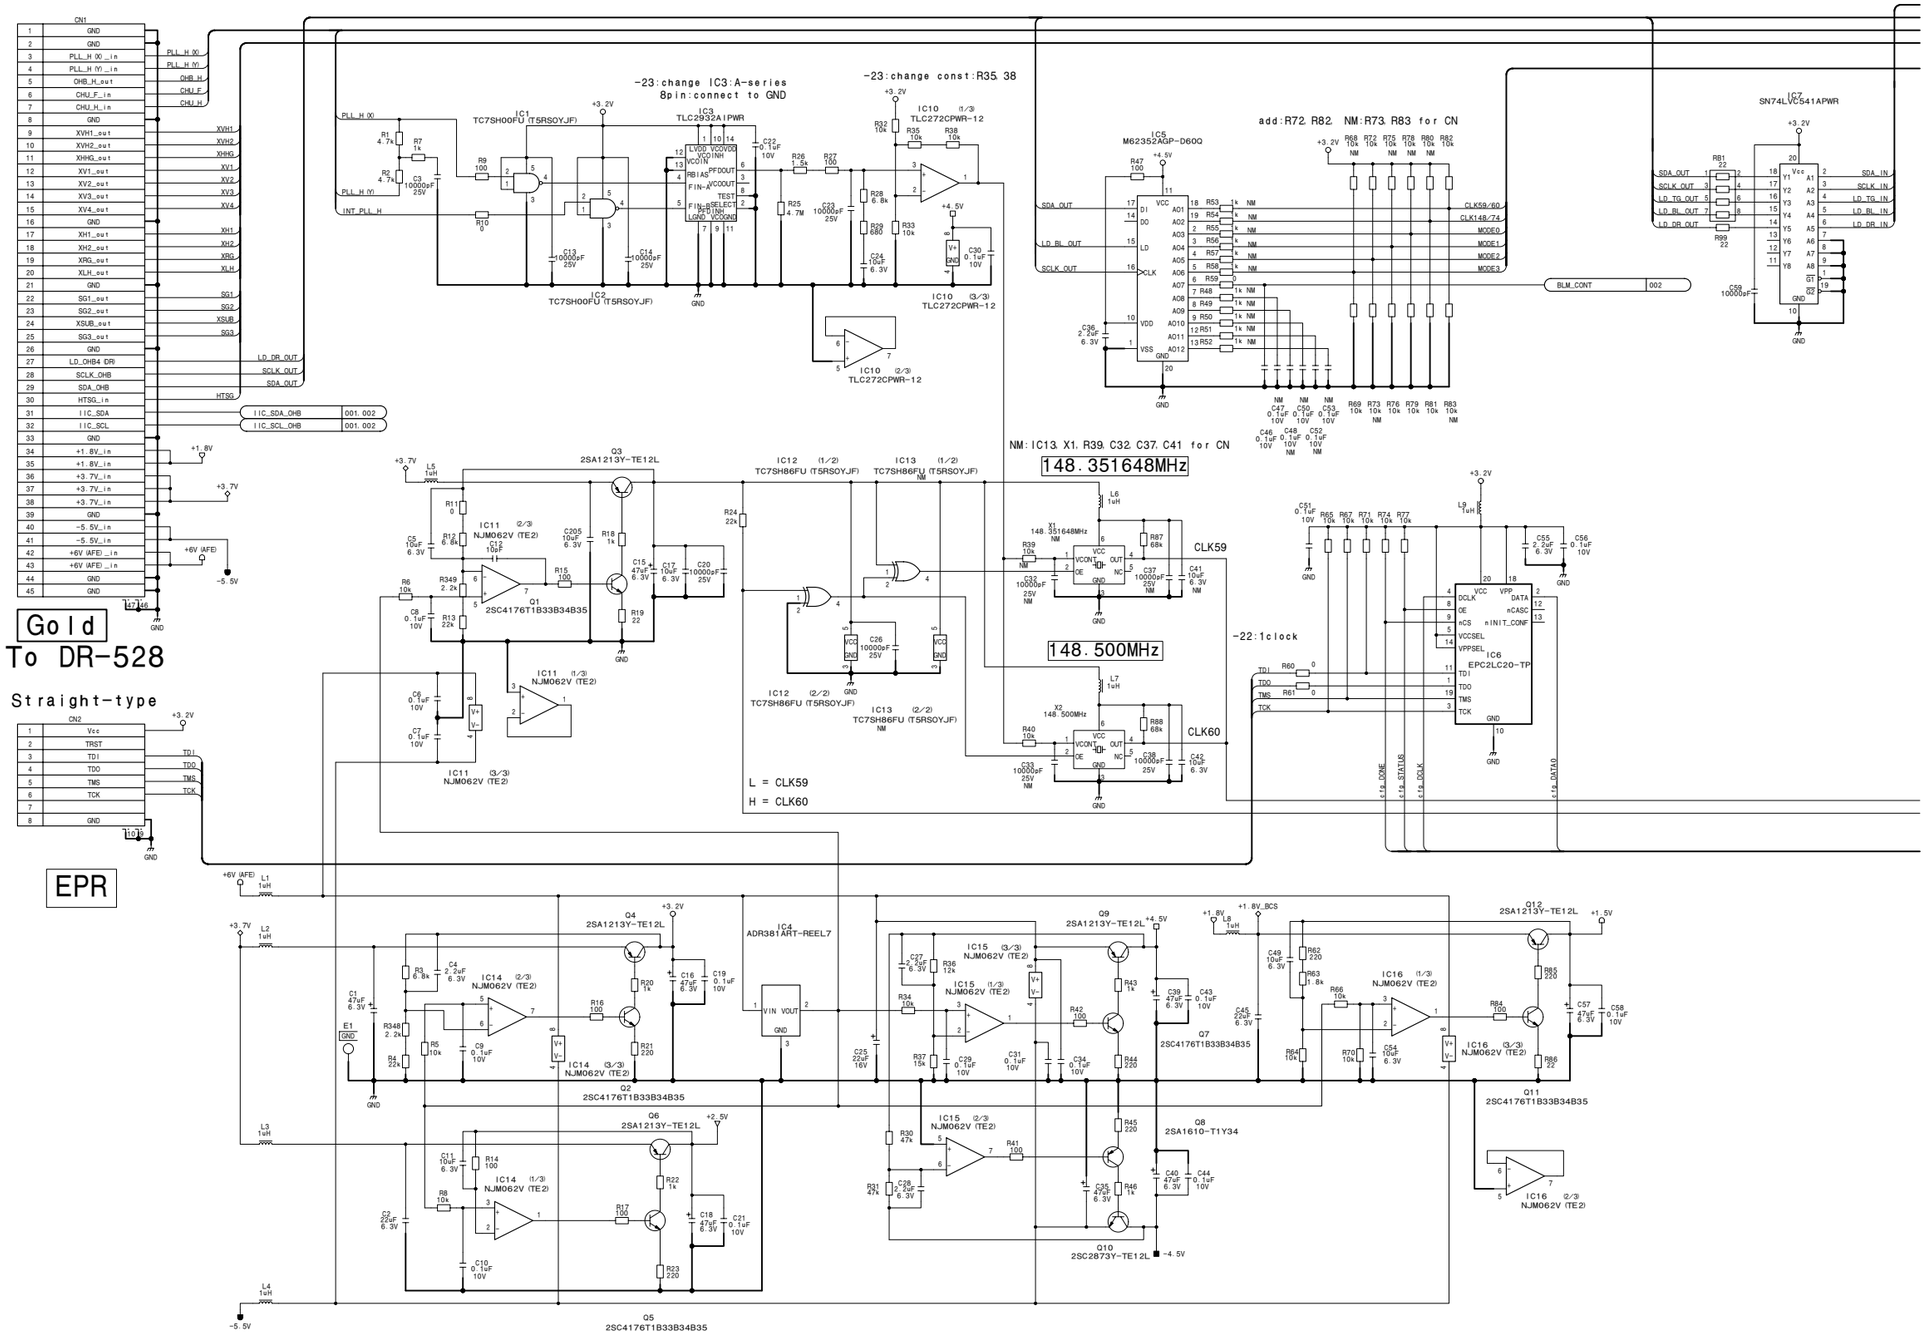-23:change IC8
threshold voltage
2.93V --> 2.63V

-23:add C211

-23:add C212

NM:R137
for CN

To PA-317


IC18
CY62256VNLL-70ZXC-T2
IC17
CXD9156GG-P (1/2)
IC17
CXD9156GG-P (2/2)
IC41 (5/5) TL074CPWR-12
IC41 (1/5) TL074CPWR-12
IC41 (2/5) TL074CPWR-12
IC41 (3/5) TL074CPWR-12
IC41 (4/5) TL074CPWR-12
IC42 (2/5) TL074CPWR-12
IC42 (3/5) TL074CPWR-12
IC42 (4/5) TL074CPWR-12
IC42 (5/5) TL074CPWR-12
IC42 (1/5) TL074CPWR-12
IC43 AD8014ART-REEL7
IC37 (3/3) TC7WH32FU (TE12R)
IC37 (1/3) TC7WH32FU (TE12R)
IC37 (2/3) TC7WH32FU (TE12R)
IC38 (1/2) NC7SZ86P5X
IC38 (2/2) NC7SZ86P5X
IC39 CAT24C256XI-GT3
IC40 CAT24C08WI-GT3
1.100V
DC:+1.500V
-1.500V
ON:LOCK
BCS_ADR
BCS_DATA
BCS_SERIAL
BCS_TIMING
IIC_SDA_OHB
IIC_SCL_OHB
SHADING
-23:add Black-shading pulse for ch2
change IC42:AD8014 --> TL074
add R383 - 394
position change R350, 353, 356

TG-243C (2/2)
SUFFIX: -23




**TG-243C (2/2)**
BOARD NO. 1-865-972-23
HDC-1500_TG-243CG_021_2

TG-247 (1/2)
SUFFIX: -11, 21, 22

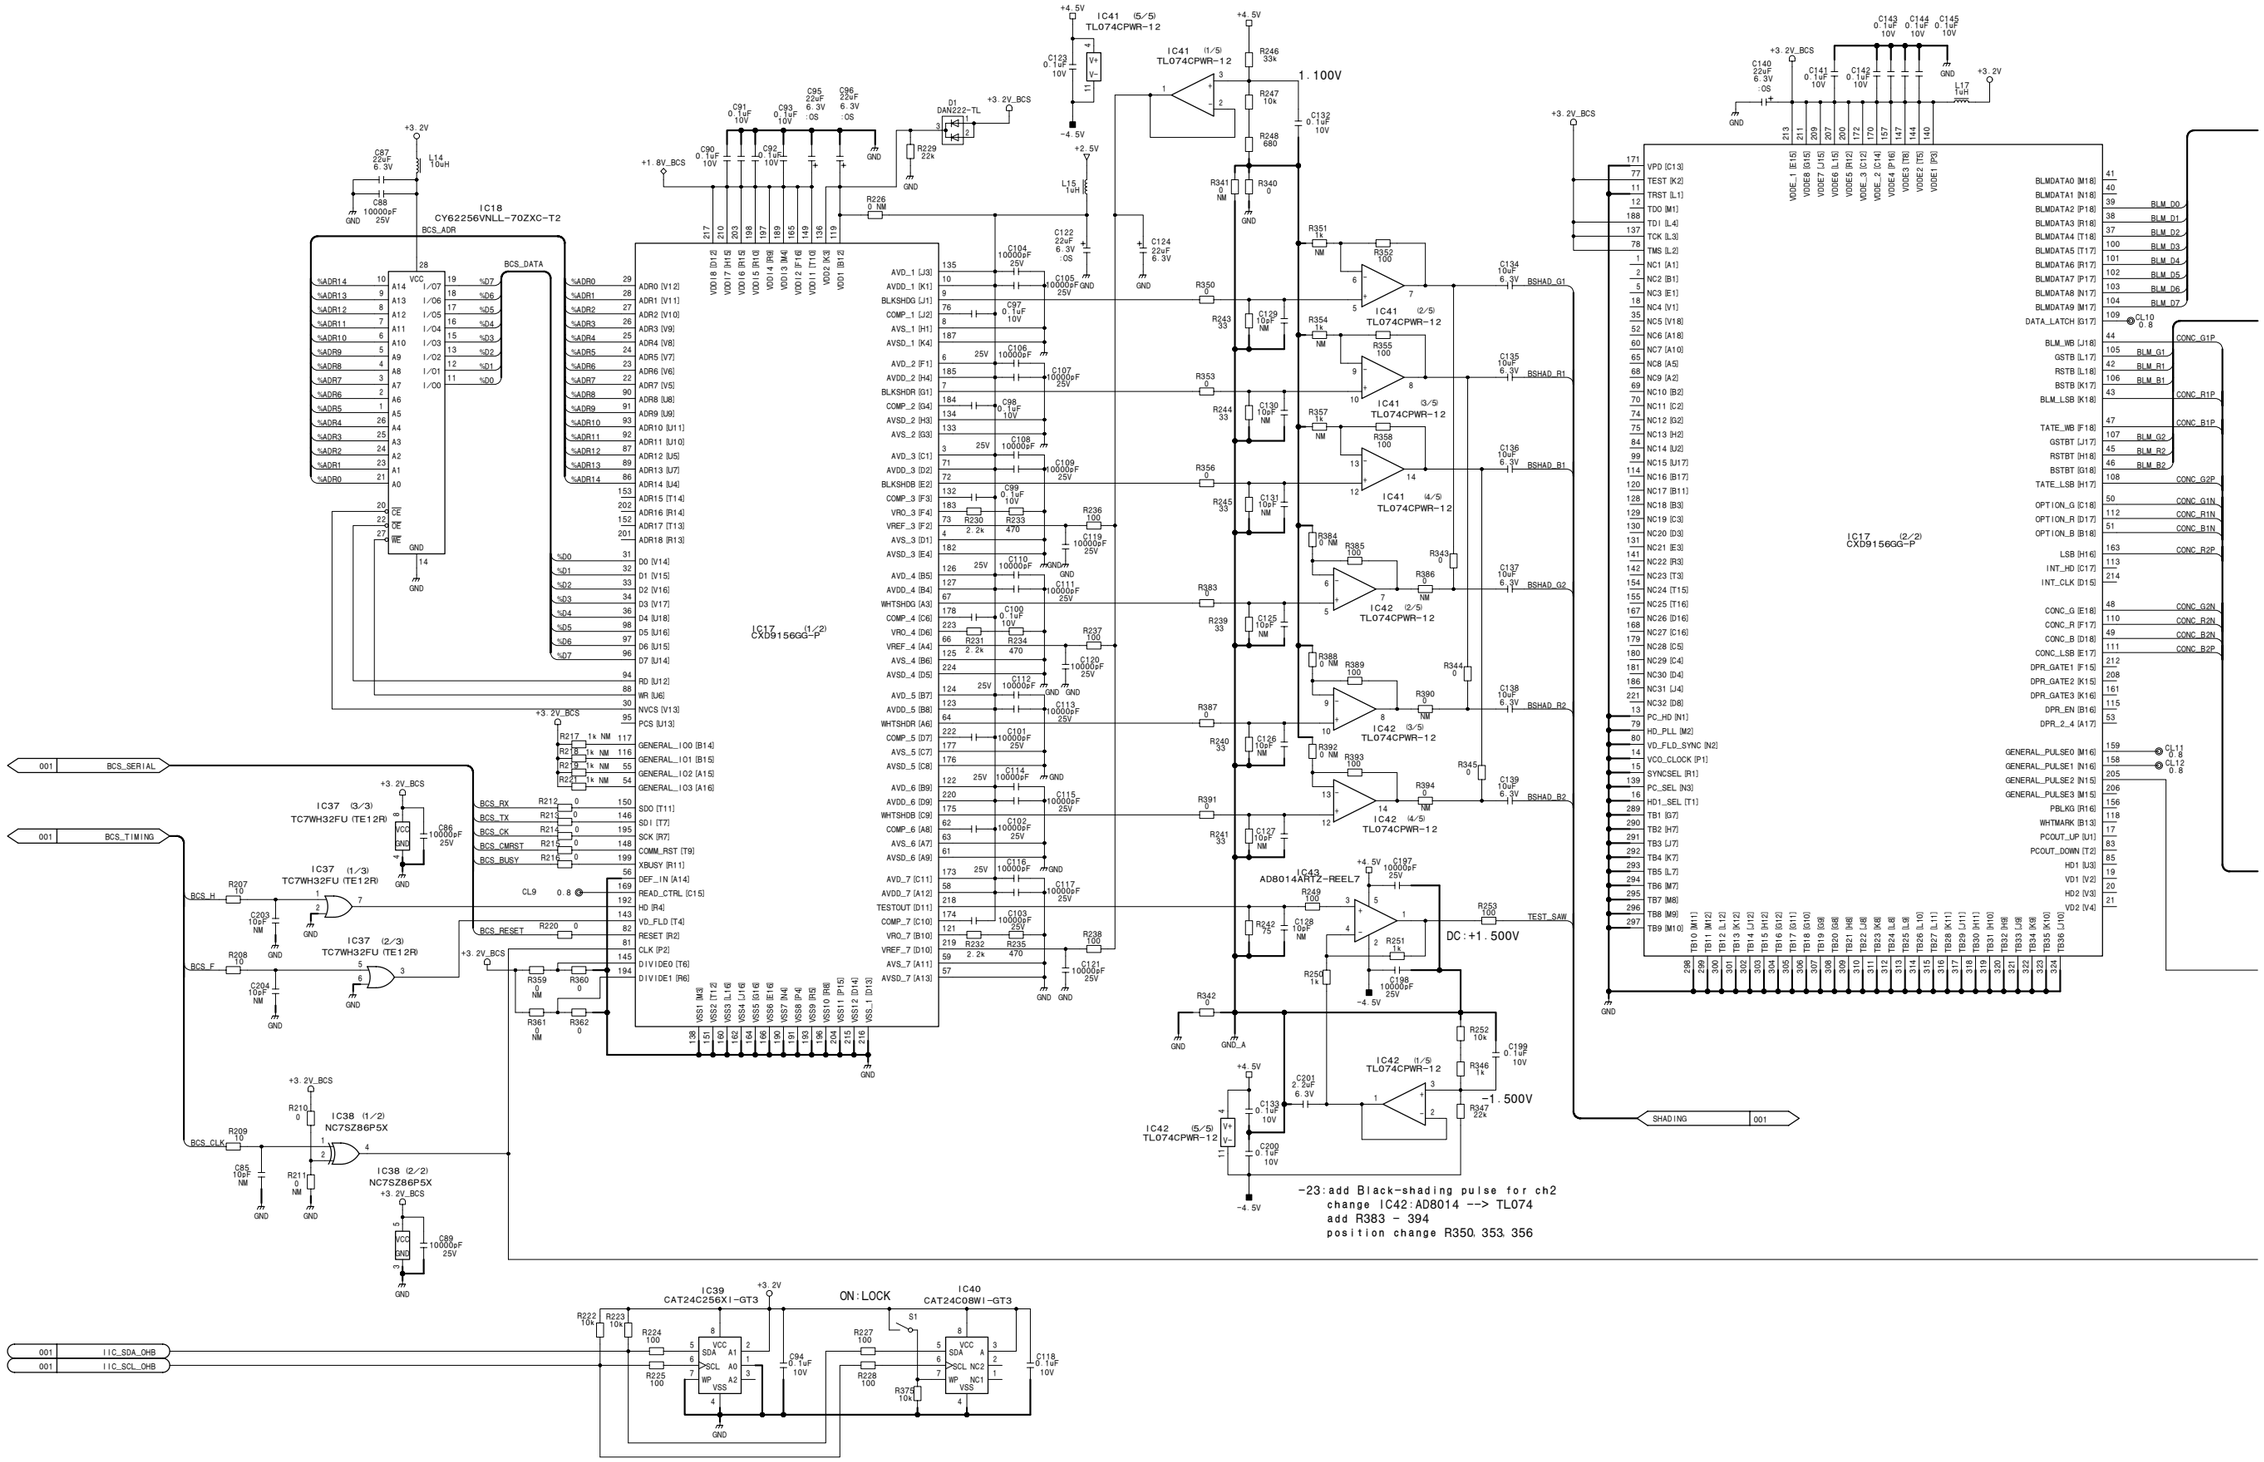Gold
To DR-562

EPR
Staright-type

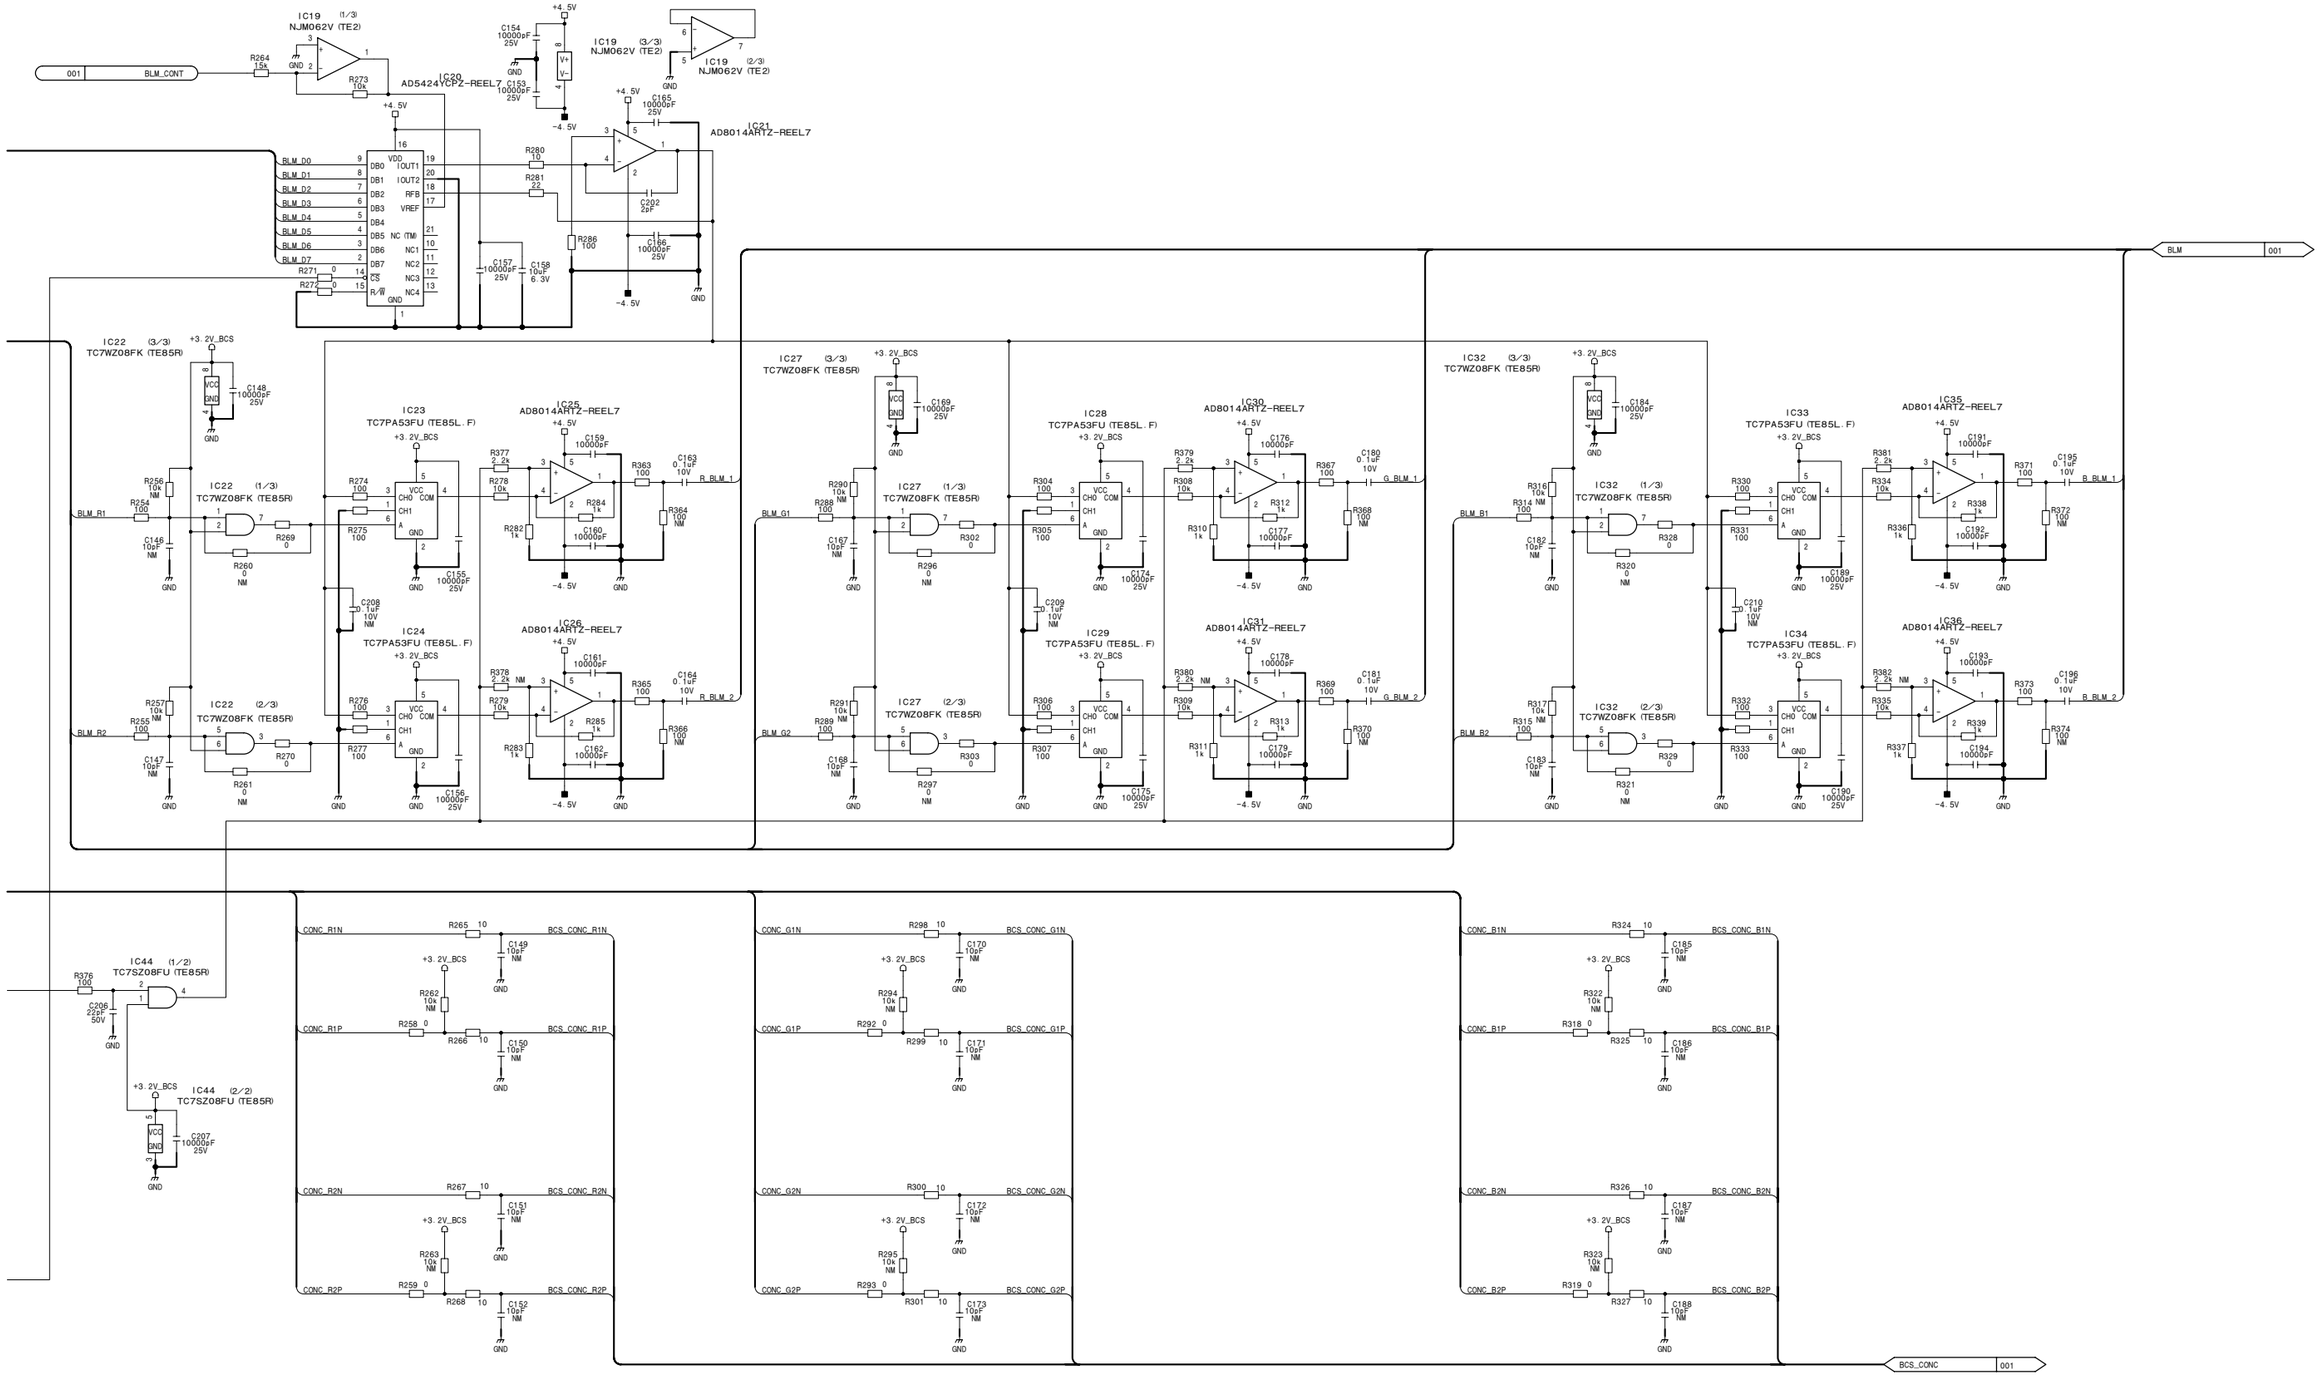148.351648MHz
148.500MHz

L = CLK59
H = CLK60

V-pulse
i:V
PsF:F

# TG
# for ICX230CL [FIT]

IC9
EP1C6F256C6N

To PA-327

*IC8 TLC7733IPWR-12

IC7 SN74LVC541APWR

*NOTE

| REF NO. | SUFFIX -11, 21 | SUFFIX 22- |
|---|---|---|
| IC8 | TLC7733IPWR-12 | TLC7703IRWR |
| C222 C223 | NOT USED | NM |
| RB9 | NOT USED | 0Ω |
| R139 | 0Ω | NM |

*NOTE

| REF NO. | SUFFIX -11 | SUFFIX 21- |
|---|---|---|
| R177 | 220 | 330 |

**TG-247 (1/2)**
BOARD NO. 1-865-960-11, 21, 22
HDC-1600_TG-247G_021_1


IC18 CY62256VLL-70ZC-T2
BCS_ADR
BCS_DATA
IC17 CXD9156GG-P (1/2)
IC17 CXD9156GG-P (2/2)
IC41 TL074CPWR-12 (5/5)
IC41 TL074CPWR-12 (1/5)
IC41 TL074CPWR-12 (2/5)
IC41 TL074CPWR-12 (3/5)
IC41 TL074CPWR-12 (4/5)
IC43 AD8014ART2-REEL7
IC42 AD8014ART2-REEL7
IC37 TC7WH32FU (TE12R) (3/3)
IC37 TC7WH32FU (TE12R) (1/3)
IC37 TC7WH32FU (TE12R) (2/3)
IC38 NC7SZ86P5X (1/2)
IC38 NC7SZ86P5X (2/2)
IC39 CAT24WC256XI-TE13
IC40 CAT24WC08J-TE13
1.100V
DC:+1.500V
-1.500V
ON:LOCK
BCS_SERIAL
BCS_TIMING
IIC_SDA_GHB
IIC_SCL_GHB
BCS_BSHADE
TEST_SAW




# TG-247 (2/2)

BOARD NO. 1-865-960-11, 21, 22

HDC-1600_TG-247G_021_2

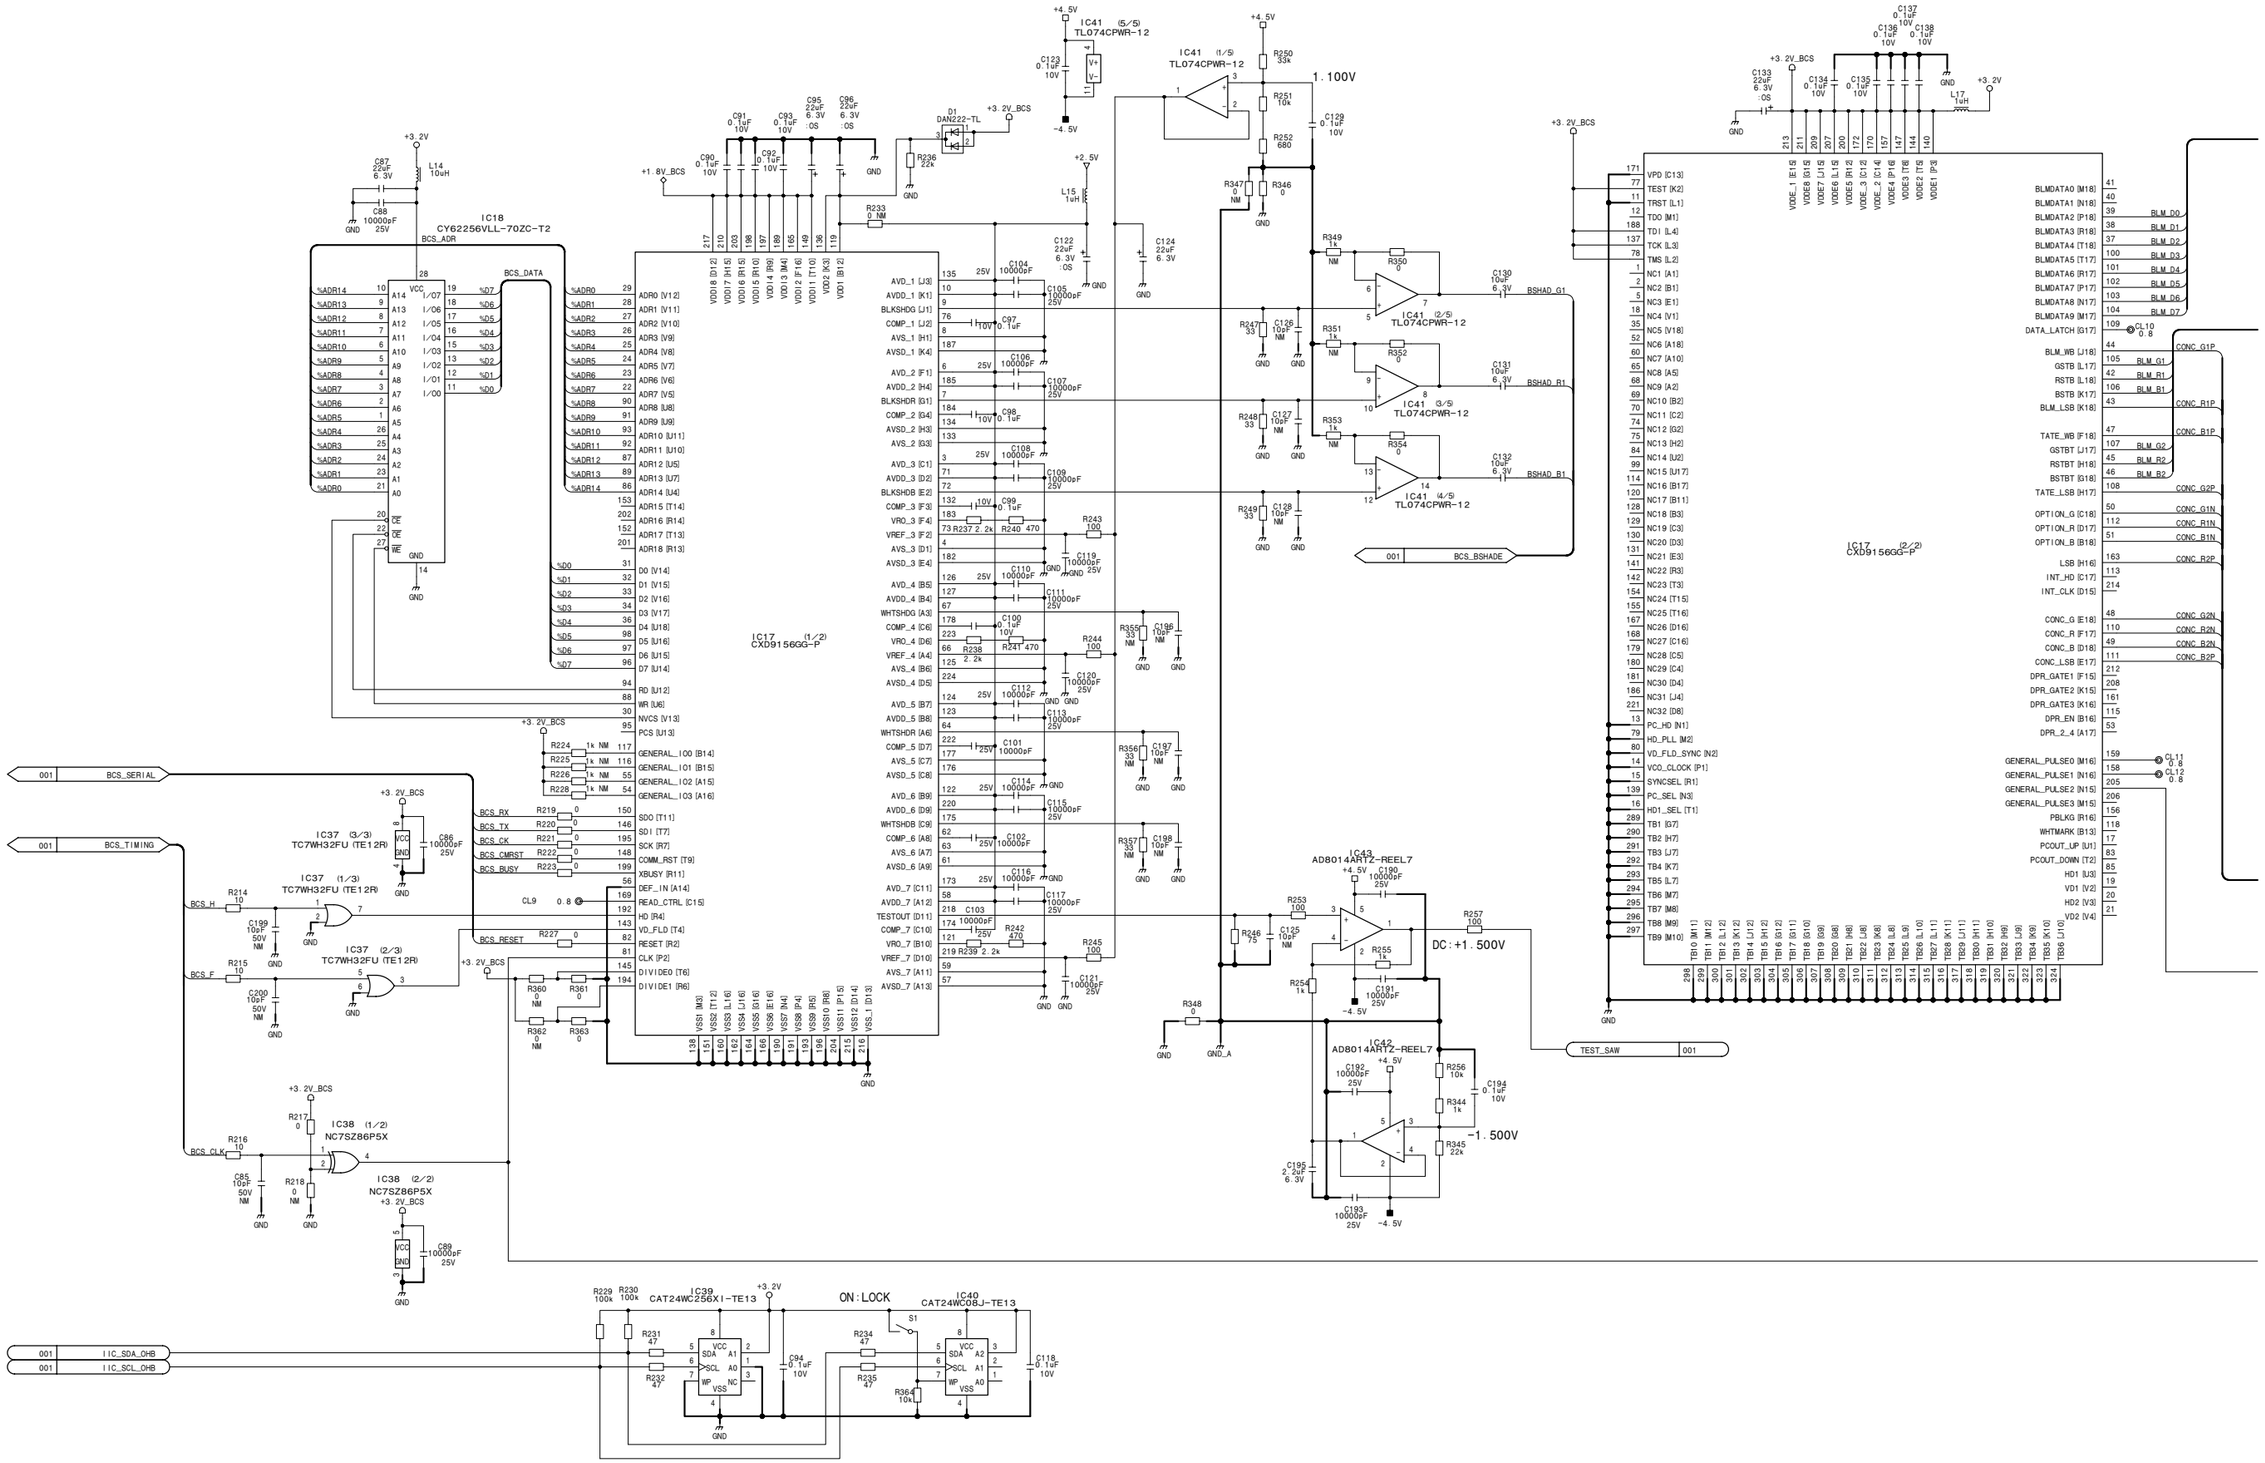TR-136 (1/7)
SUFFIX: -13, 14

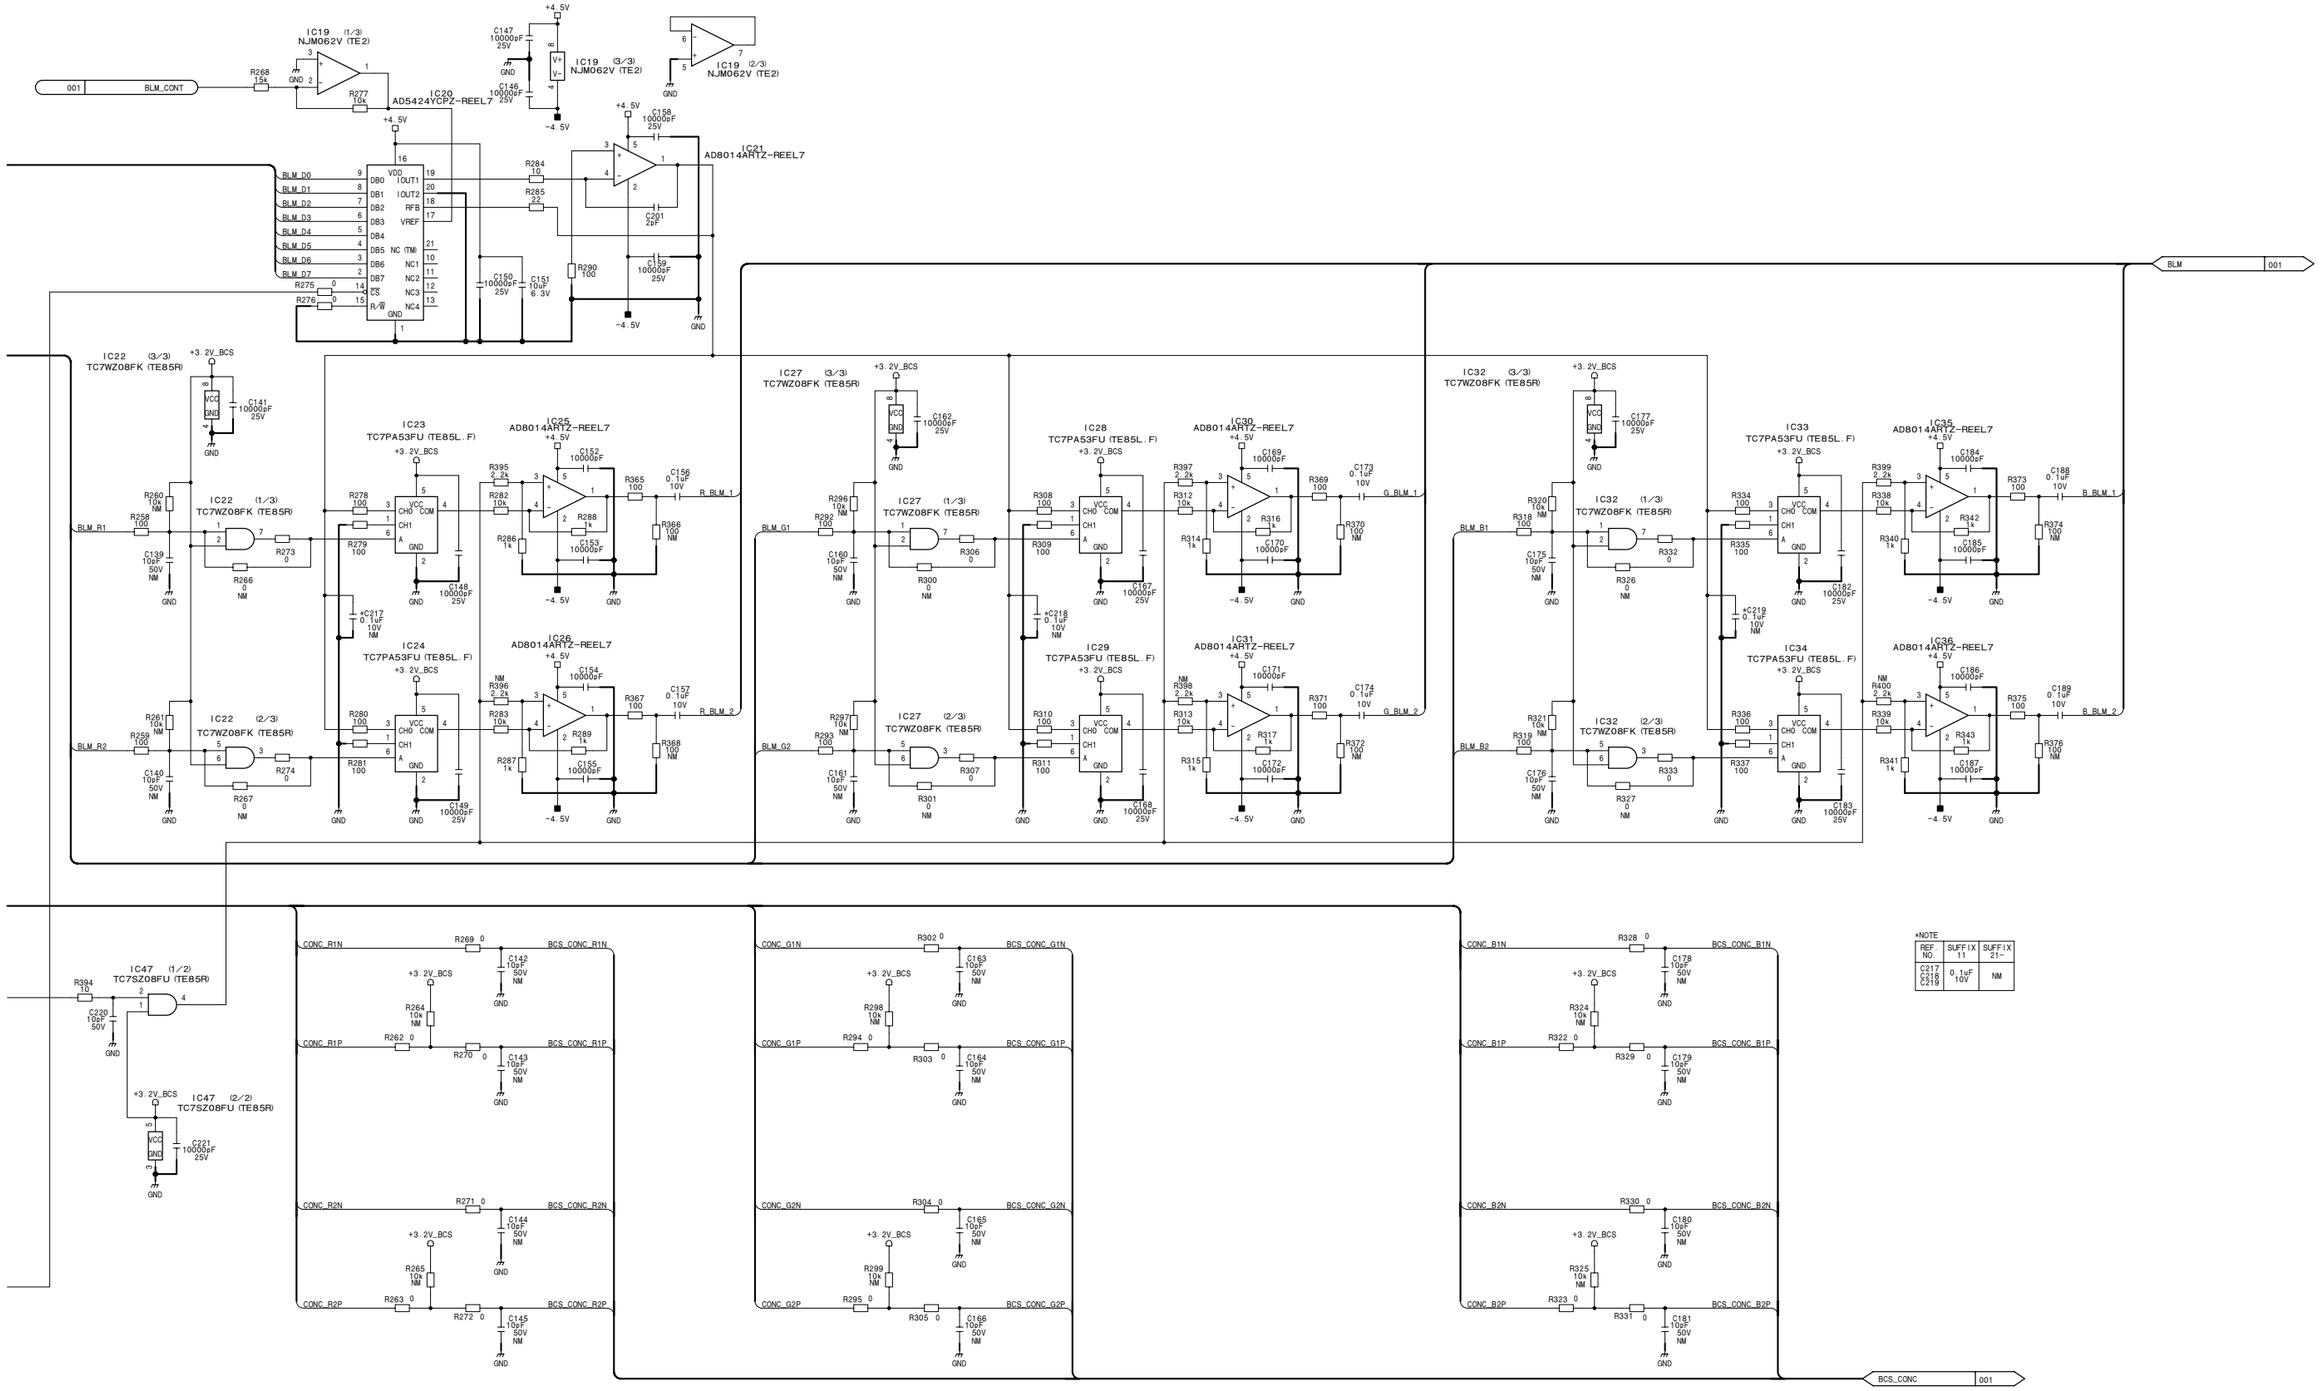





TR-136 (1/7)
BOARD NO. 1-868-410-13, 14
HDC1550_TR-136_014_1

**TR-136 (2/7)**
**SUFFIX: -13, 14**

TONE_GEN:102.4Hz
3.3V
LPF:150Hz
5.6M_FREQ_ADJ
5.6M
6.2M_FREQ_ADJ
6.2M
6.7M_FREQ_ADJ
6.7M
7.1M_FREQ_ADJ
7.1M
7.4M_FREQ_ADJ
7.4M
GND-3
3.0M
3.6M
3.9M
4.3M
4.75M
LPF280kHz
LPF:10KHz
3.0M_TUNE
3.6M_TUNE_1
3.6M_TUNE_2
3.9M_TUNE_1
3.9M_TUNE_2
4.3M_TUNE_1
4.3M_TUNE_2
4.75M_TUNE_1
4.75M_TUNE_2
200mVpp at 0dB
INCOM1_LEV_ADJ
INCOM2_LEV_ADJ
PGM1_LEV_ADJ
PGM2_LEV_ADJ
MIC_1_DEV
MIC_2_DEV
INCOM_1_DEV
INCOM_2_DEV
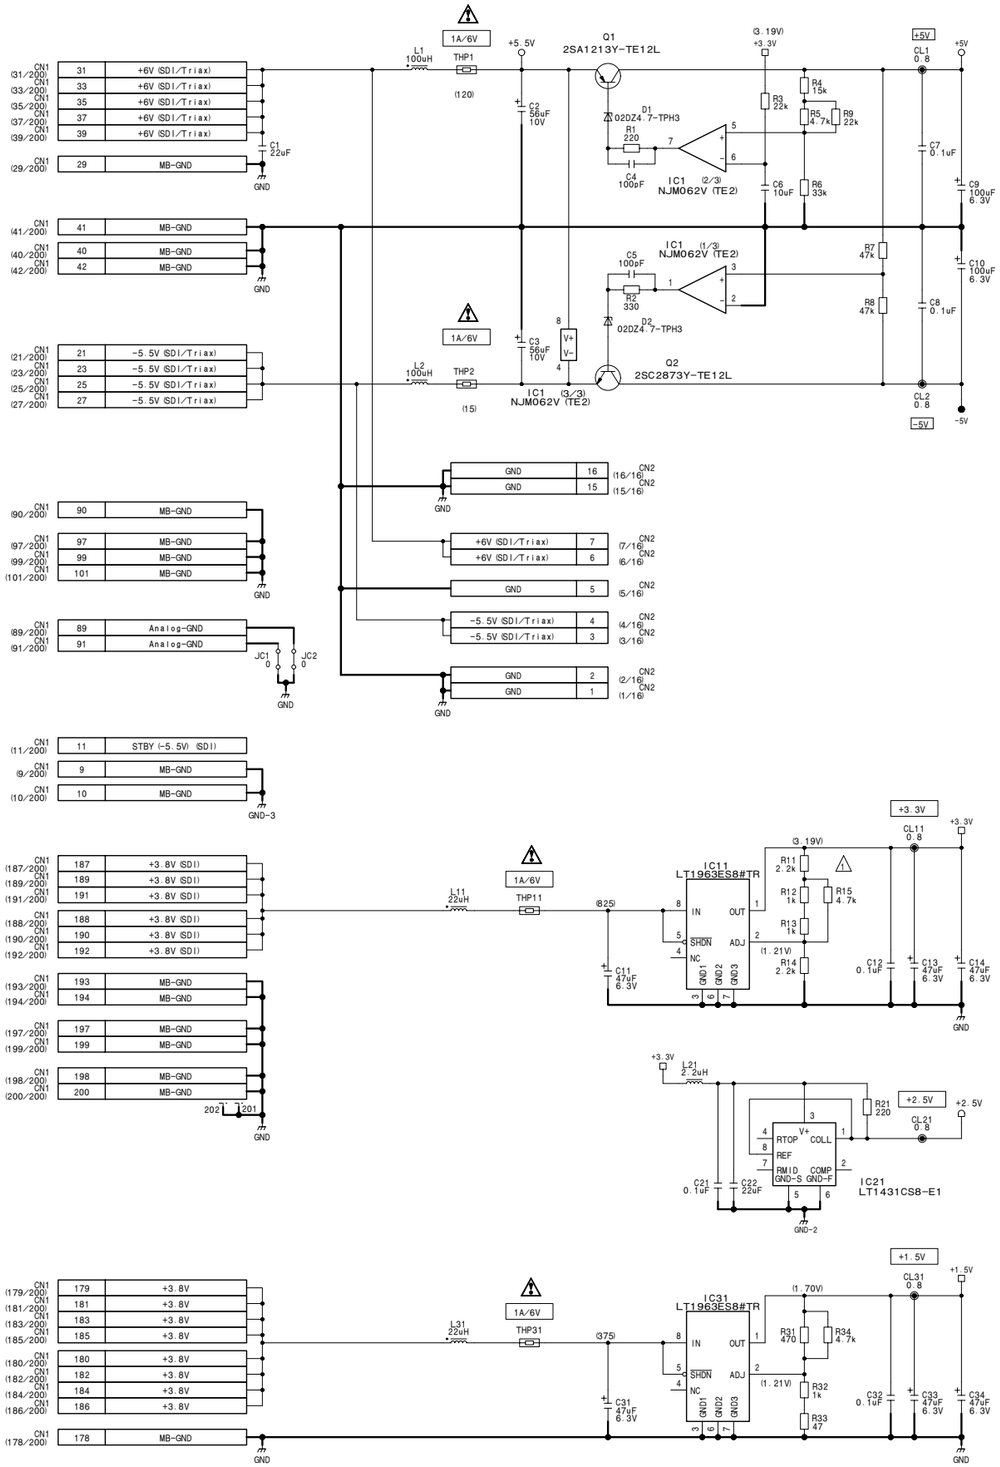
| *NOTE | | |
|---|---|---|
| REF NO. | SUFFIX -13 | SUFFIX -14 |
| C155 | 0.01uF | 1uF 6.3V |
| C156 | 22uF 16V | 47uF 6.3V |
| R287,R288 | 100ohm | 100 |

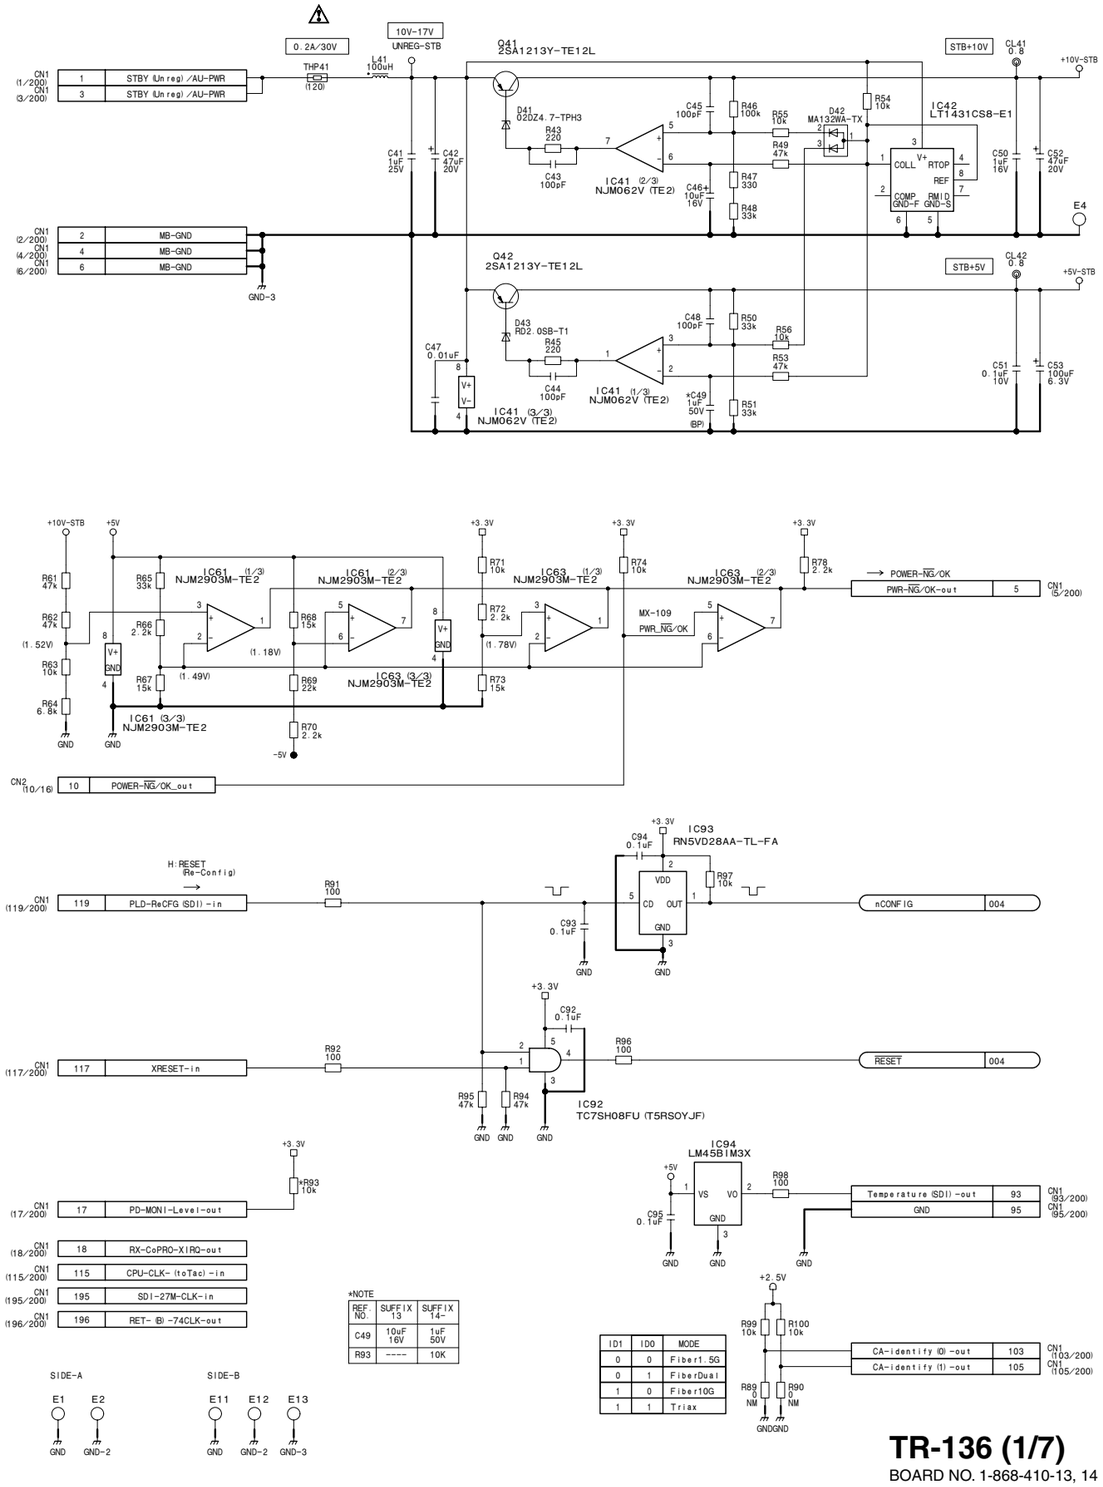**TR-136 (2/7)**
BOARD NO. 1-868-410-13, 14
HDC1550_TR-136_014_2

TR-136 (3/7)
SUFFIX: -13, 14




TR-136 (3/7)
BOARD NO. 1-868-410-13, 14
HDC1550_TR-136_013_3


4-134
HDC1000/V2 (J, E)

# TR-136 (4/7)

**SUFFIX: -13, 14**

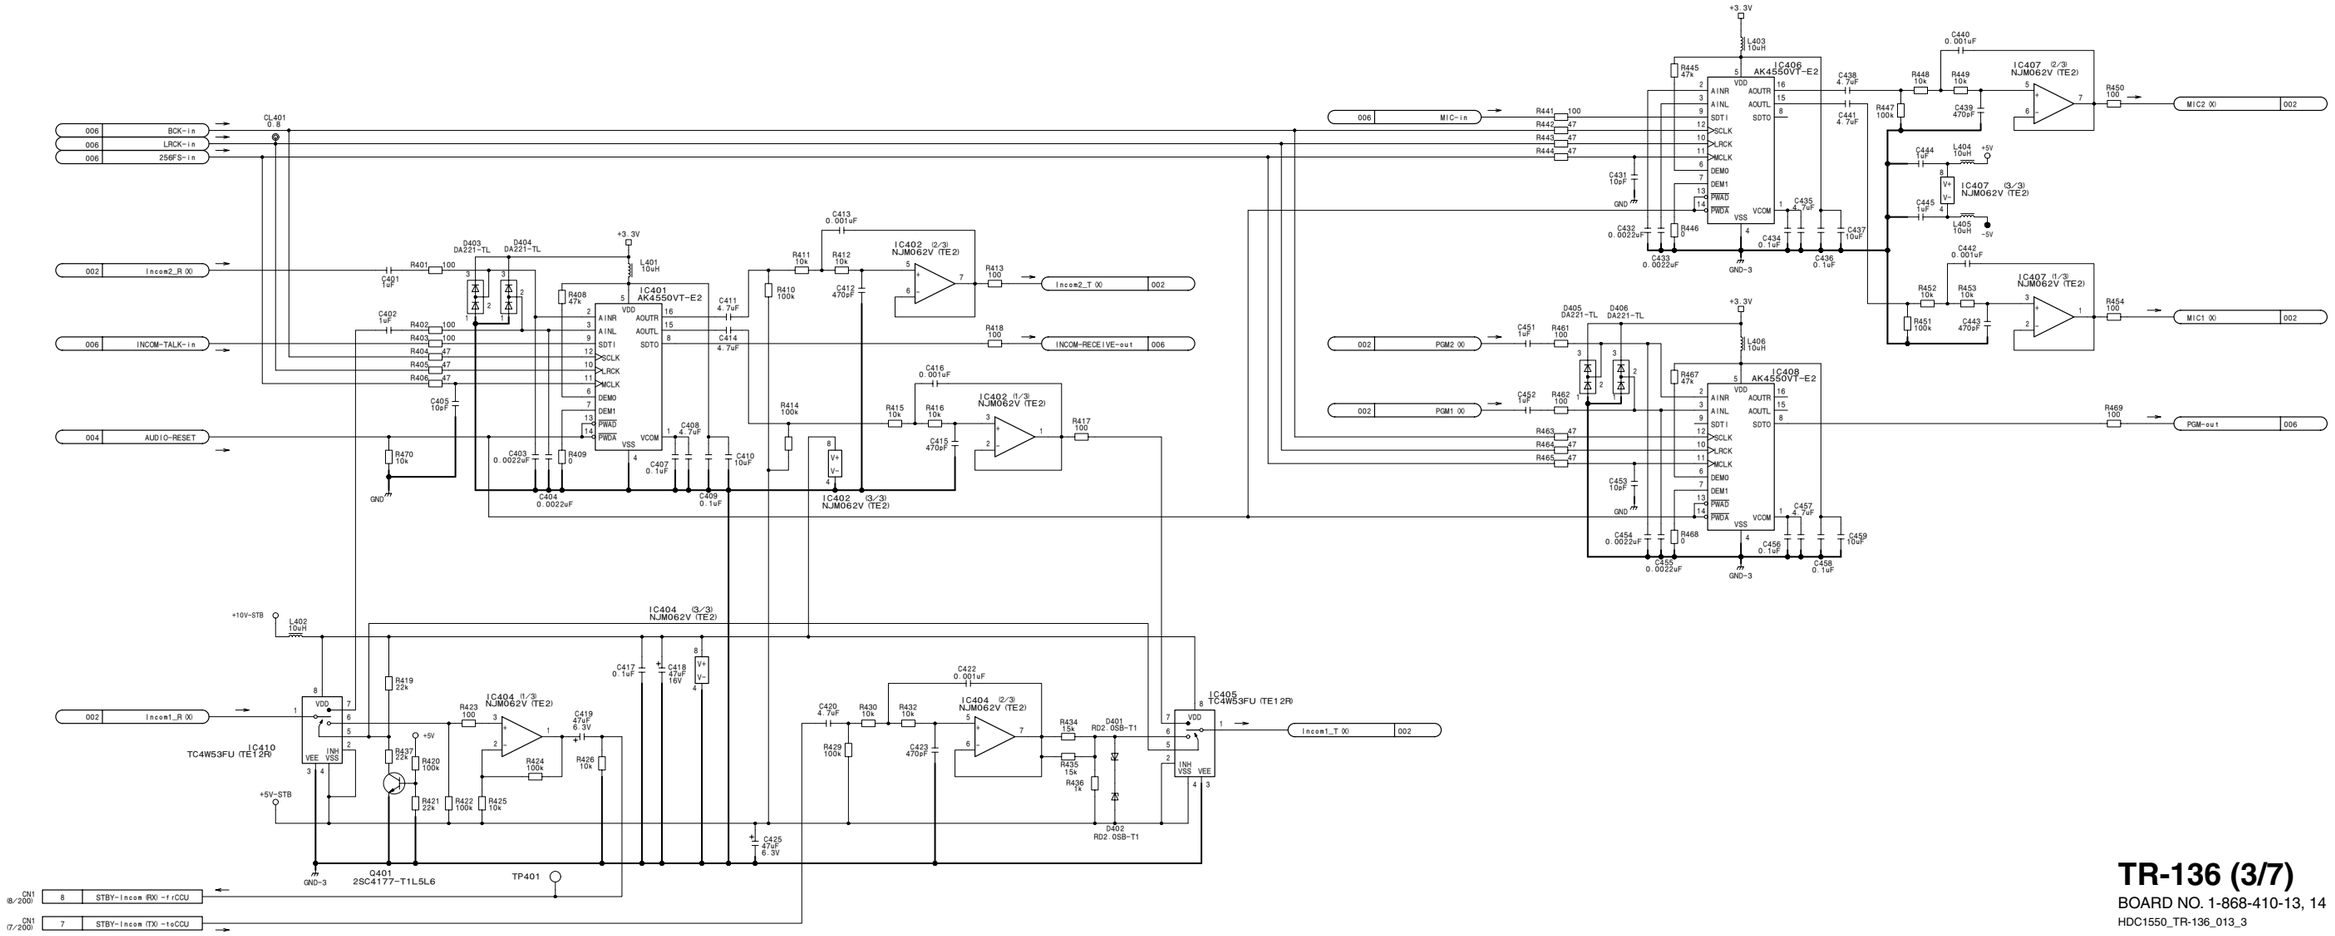TR-136 (4/7)
SUFFIX: -13, 14






4-135

**TR-136 (4/7)**

BOARD NO. 1-868-410-13, 14

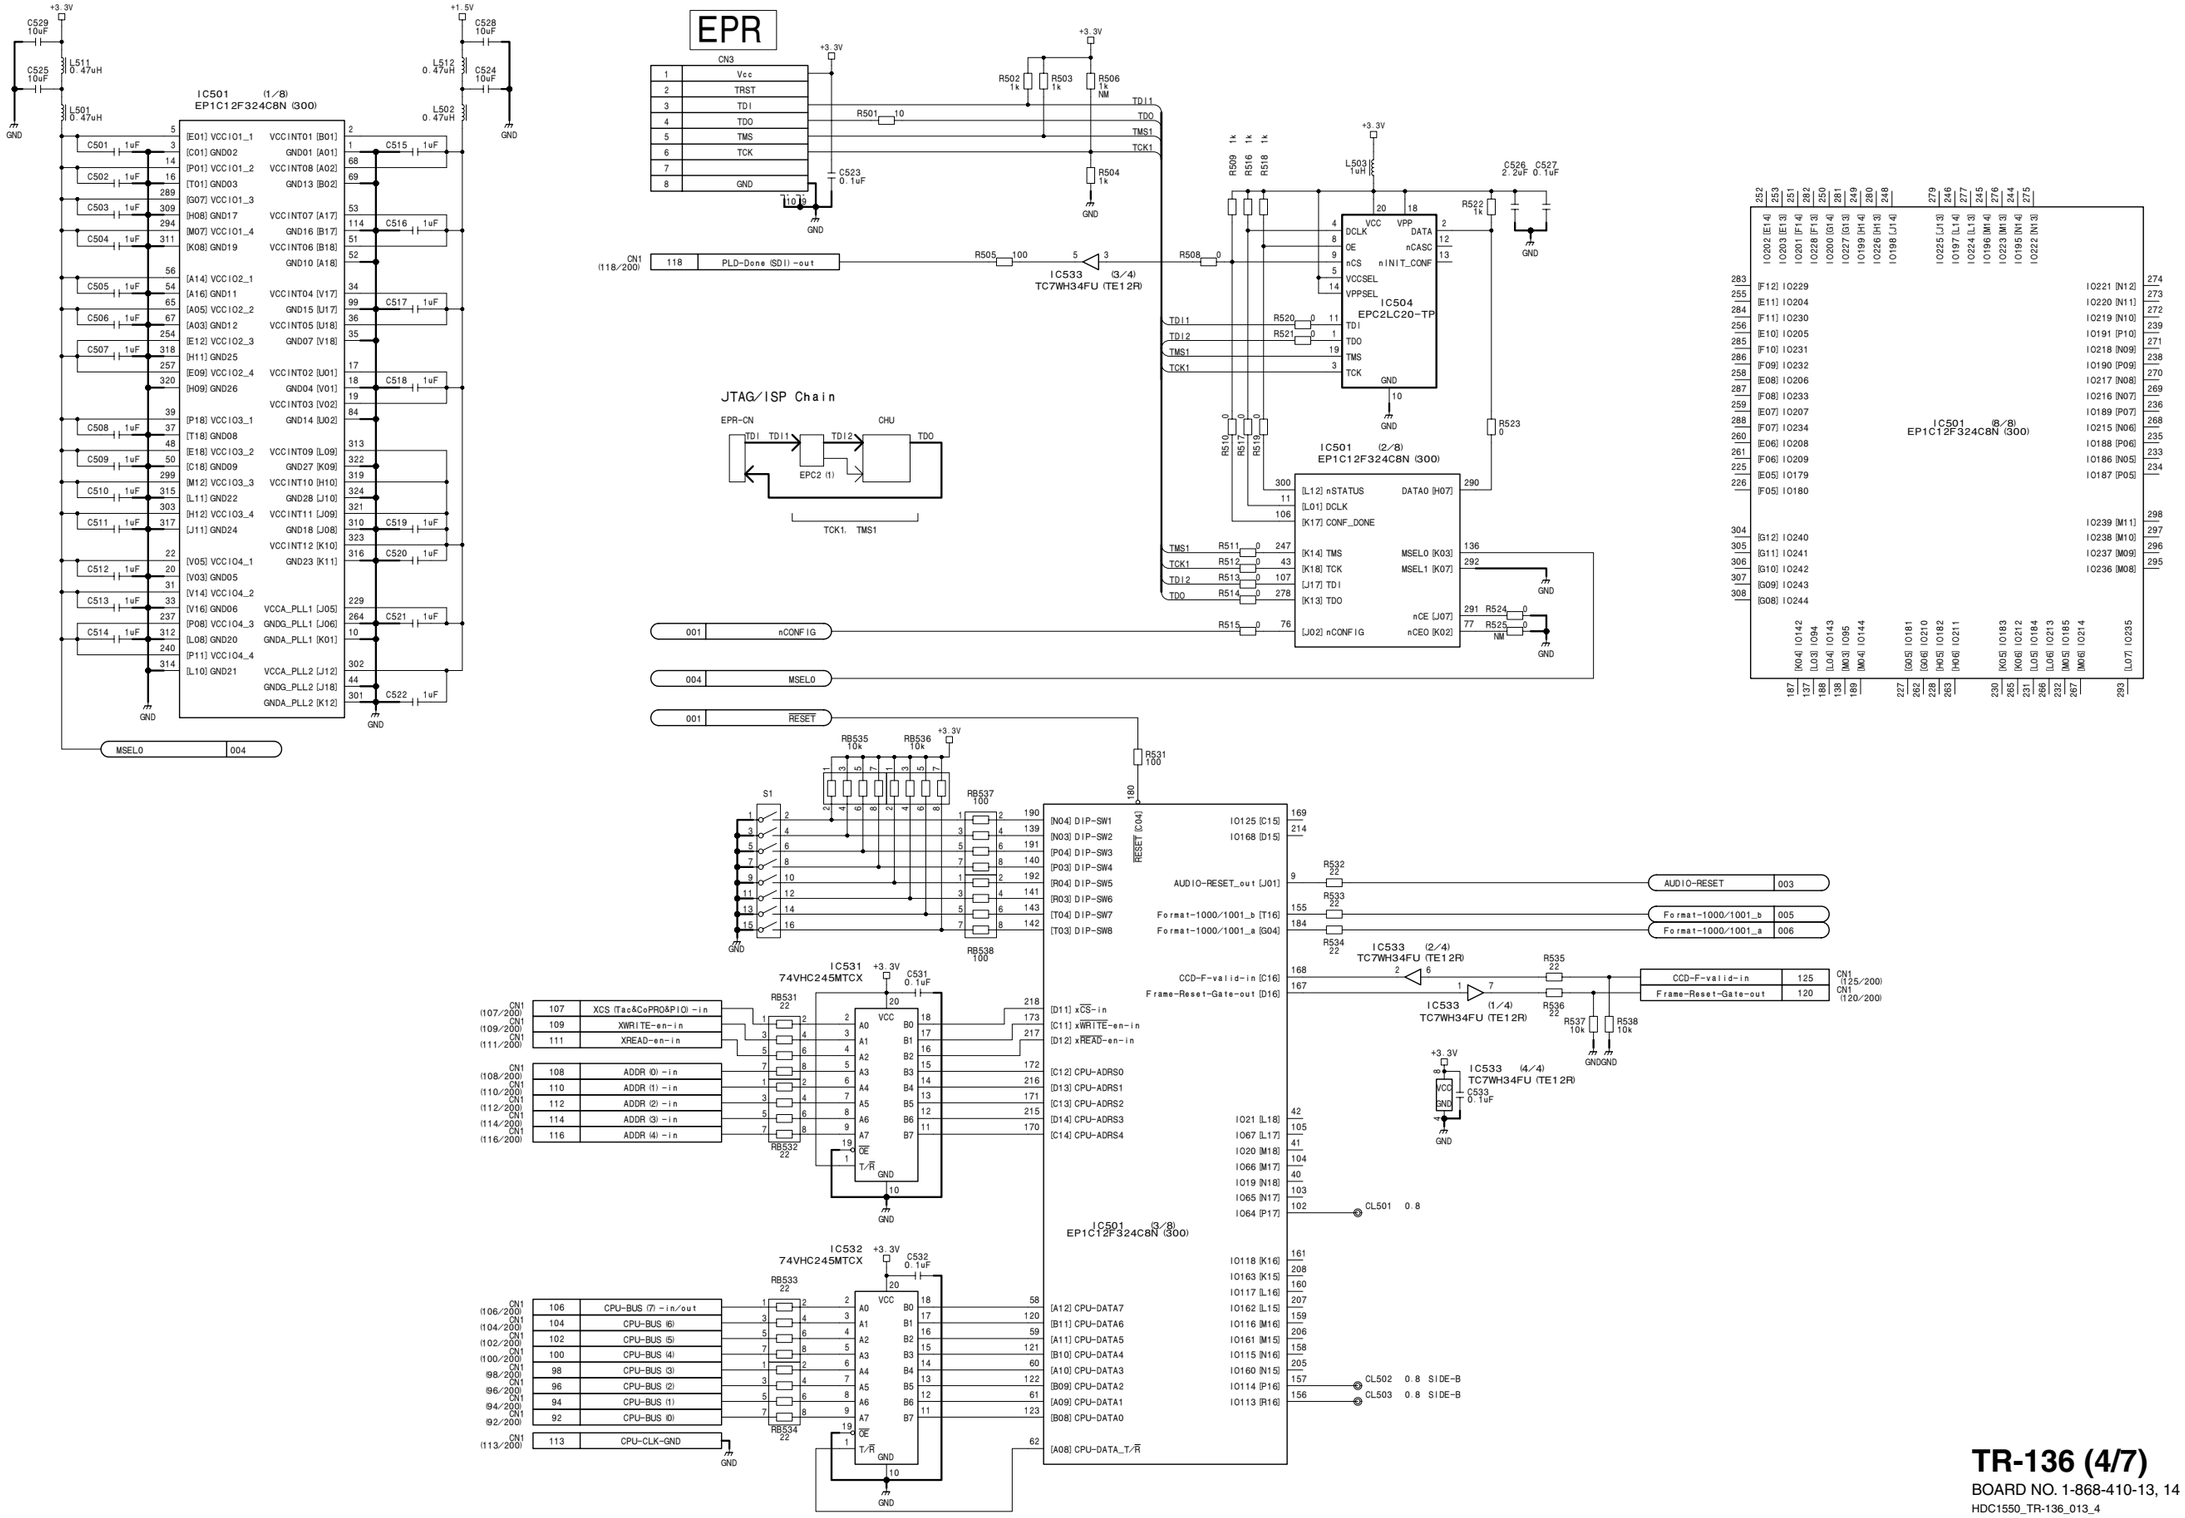HDC1550_TR-136_013_4

TR-136 (5/7)
SUFFIX: -13, 14

## CHU Video Clock ／ PLL

IC501 (4/8) EP1C12F324C8N (300)

IC541 TLC2932AIPWR

IC542 TLC2932AIPWR

IC543 (1/3) TLC272CPWR-12

IC543 (2/3) TLC272CPWR-12

IC543 (3/3) TLC272CPWR-12

Q541 2SC4617TL-QR

Q542 2SA1774TL-QR

Q543 2SA1774TL-QR

IC546 (1/2) TC7SZ32FU (TE85R)

IC546 (2/2) TC7SZ32FU (TE85R)

IC545 TC7W53FU (TE12R)

IC547 TC7W53FU (TE12R)

| *NOTE | | |
|---|---|---|
| REF NO. | SUFFIX 13 | SUFFIX 14- |
| IC541 IC542 | TLC2934 IPWR | TLC2932A IPWR |

| NOTE | *1 | *2 |
|---|---|---|
| HDC1550 (UC) | 10001-11017 | 11018 AND HIGHER |
| HDC1550 (CE) | 40001-40050 | 40051 AND HIGHER |
| HDC1550 (CE) | 400001-410000 | 410001 AND HIGHER |

+3.3V-1

+3.3V-2

GND-2

## CHU Video Proc.

IC501 (5/8) EP1C12F324C8N (300)

IC602 SN74LVC574APWR

IC603 SN74LVC574APWR

IC604 SN74LVC574APWR

IC601 TC7WH04FU (TE12R)

IC605 DAC902E/2K5

IC606 DAC902E/2K5

IC607 LMH6732MFX/NOPB

IC608 LMH6732MFX/NOPB

FL601

FL602

RV601 CHU-Y-LVL

RV602 CHU-C-LVL

## CHU VIDEO Proc.

FILTER
- Y Filtering->74MHz X Phase0.1
- Time Base Collector (CLK/H)
- R-Y Filtering->74MHz
- B-Y Filtering->74MHz

Clock Rate Convert
- Y:74MHz->129.6MHz
- C:74MHz->86.4MHz

SYNC/REF-Pulse Add
Y/R-Y/B-Y Digital Modulation
VIDEO TG (each Format)
SkinGate/Zebra MIX
TRIAX TEST Signal Generate
TRIAX Carrier Generate (PLL)

Digital Modulator

# TR-136 (5/7)
BOARD NO. 1-868-410-13, 14
HDC1550_TR-136_014_5


4-136

HDC1000/V2 (J, E)

## AUDIO PROCESS

Clock PLL (24.576MHz)

### 700/900mode Selector

Packet Assign

CHU -> CCU

| | CH1/2 | CH3/4 | CH5/6 | CH7/8 |
|---|---|---|---|---|
| 700 | AES/EBU | TRUNK | MIC | INCOM |
| 900 | MIC | AES/EBU | INCOM | TRUNK |

CCU -> CHU

| | CH1/2 | CH3/4 | CH5/6 | CH7/8 |
|---|---|---|---|---|
| 700 | ---- | TRUNK | INCOM | PGM |
| 900 | PGM | ---- | INCOM | TRUNK |

## SYNC Phase Adjust

*NOTE

| REF NO. | SUFFIX 13 | SUFFIX 14~ |
|---|---|---|
| IC703 | TLC2932 IPW | TLC2932A IPWR |

## CCU 74M PLL

**TR-136 (6/7)**
BOARD NO. 1-868-410-13, 14
HDC1550_TR-136_014_6

TR-136 (7/7)
SUFFIX: -13, 14

RET-Y
from MX-109

CN2 (14/16) 14 RET (G) out
CN2 (13/16) 13 RET (Y) out
CN2 (12/16) 12 RET (G) out

IC801 AD8041ARZ-REEL
IC803 AD8041ARZ-REEL
IC806 ADS828E/1K
IC805 TC7S66FU (TE85R)
IC802 (1/3) TLC272CPWR-12
IC802 (2/3) TLC272CPWR-12
IC802 (3/3) TLC272CPWR-12
IC807 NJU7034V-TE2 (1/5)
IC807 NJU7034V-TE2 (2/5)
IC807 NJU7034V-TE2 (3/5)
IC807 NJU7034V-TE2 (4/5)
IC807 NJU7034V-TE2 (5/5)
Q801 XN6435-TX
Q802 (1/2) XN6534-TX
Q802 (2/2) XN6534-TX

RET-DC
TP801

006 ADC-CLK74-out

IC851 SN74LVC574APWR
IC852 SN74LVC574APWR
IC853 SN74LVC574APWR
IC854 (1/2) TC7SZ32FU (TE85R)
IC854 (2/2) TC7SZ32FU (TE85R)

CLP
CL851 0.8

RET PROCESS
Blanker
VIDEO TG (each Format)

IC501 (7/8)
EP1C12F324C8N (300)

006 RET_74M_LATCH

PROMPTER
from MX-109

CN2 (9/16) 9 Prompter (X) -out
CN2 (8/16) 8 Prompter (G) -out

TR-136 (7/7)
BOARD NO. 1-868-410-13, 14
HDC1550_TR-136_013_7


4-138
HDC1000/V2 (J, E)

TR-136 (1/7)
SUFFIX: -15, 32







TR-136 (1/7)
BOARD NO. 1-868-410-15, 32
HDC1550_TR-136_015_1



4-132 (a)

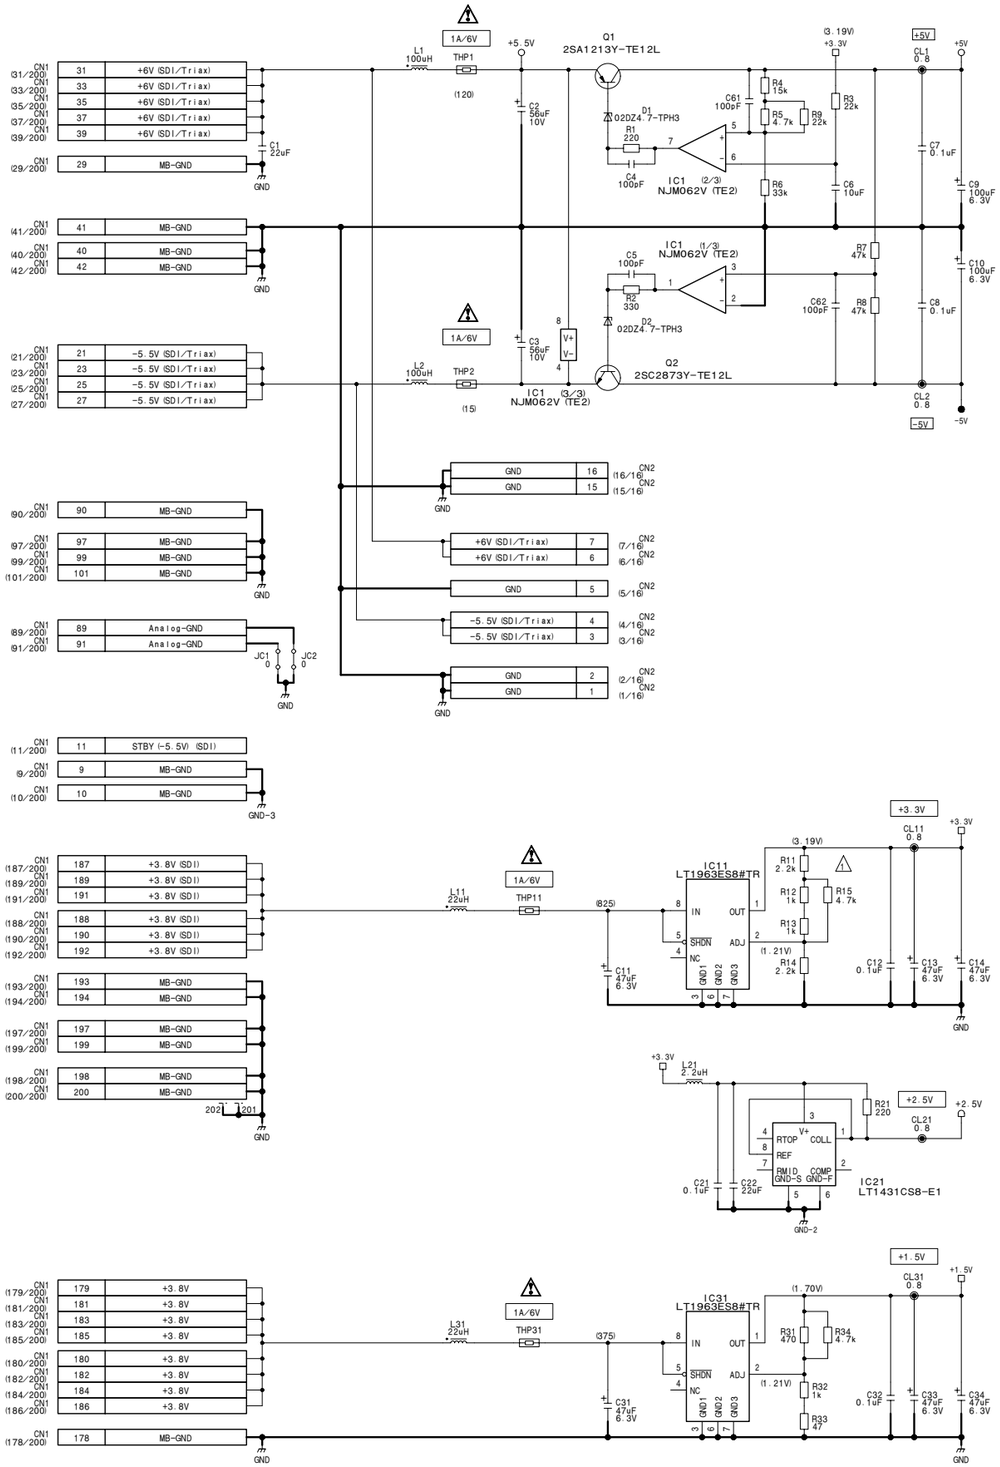**TR-136 (2/7)**
**SUFFIX: -15, 32**

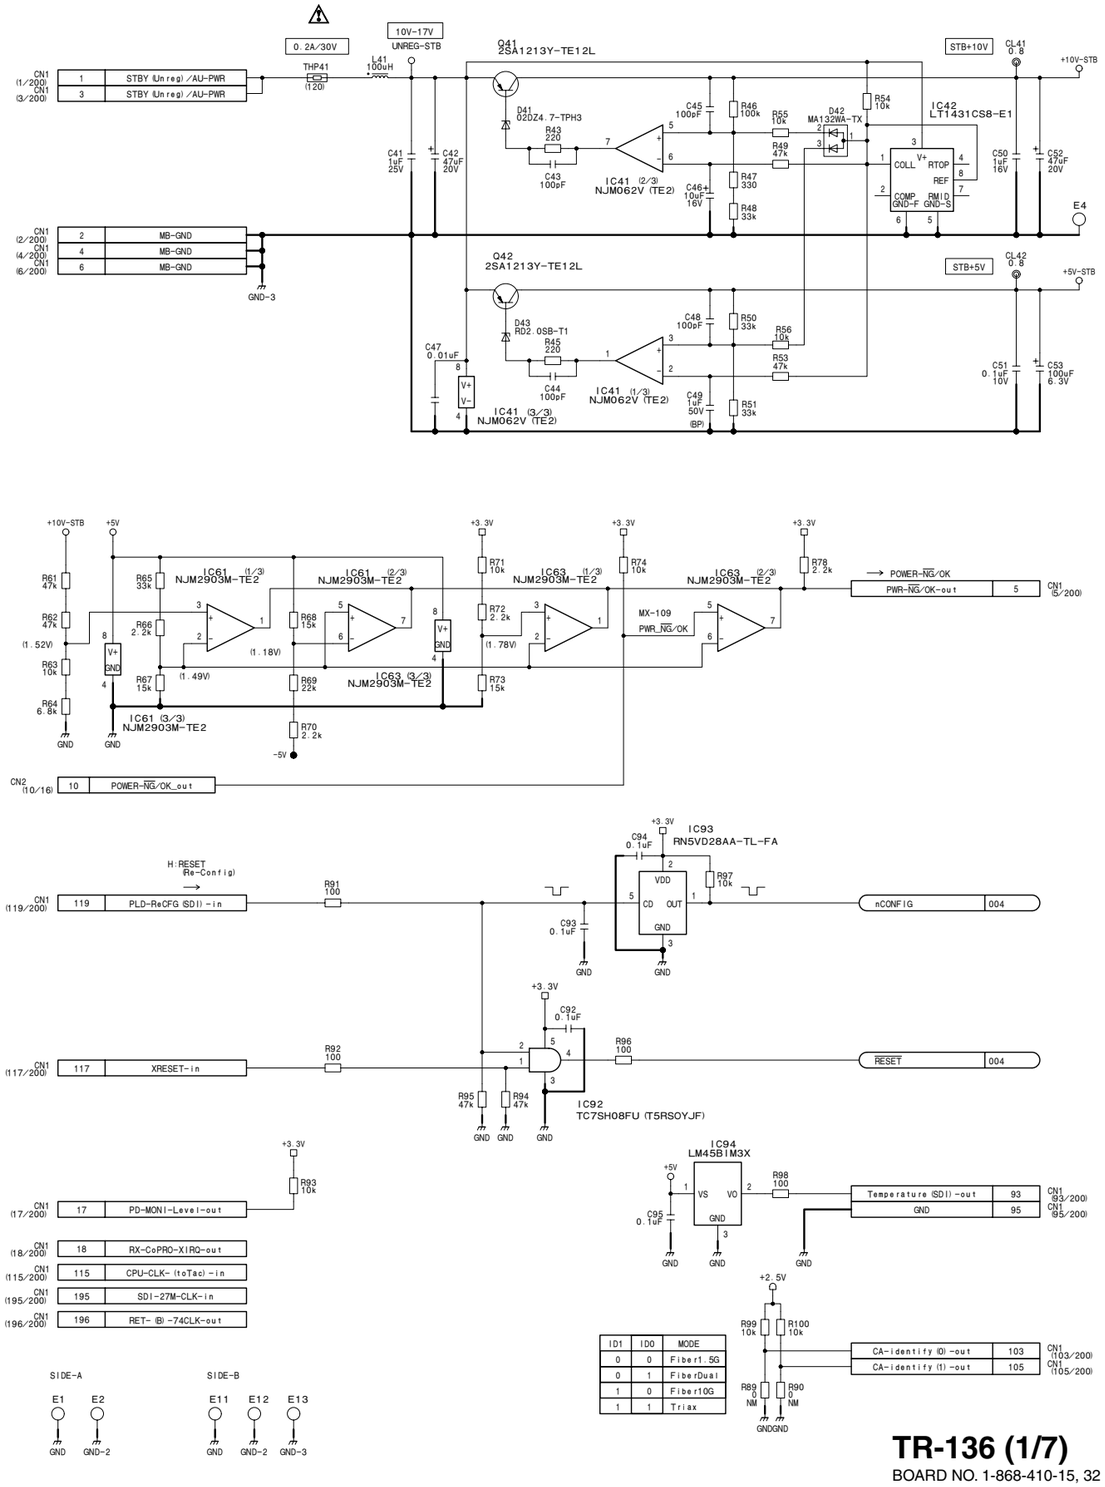


**TR-136 (2/7)**
BOARD NO. 1-868-410-15, 32
HDC1550_TR-136_015_2

TR-136 (3/7)
SUFFIX: -15, 32





4-134 (a)
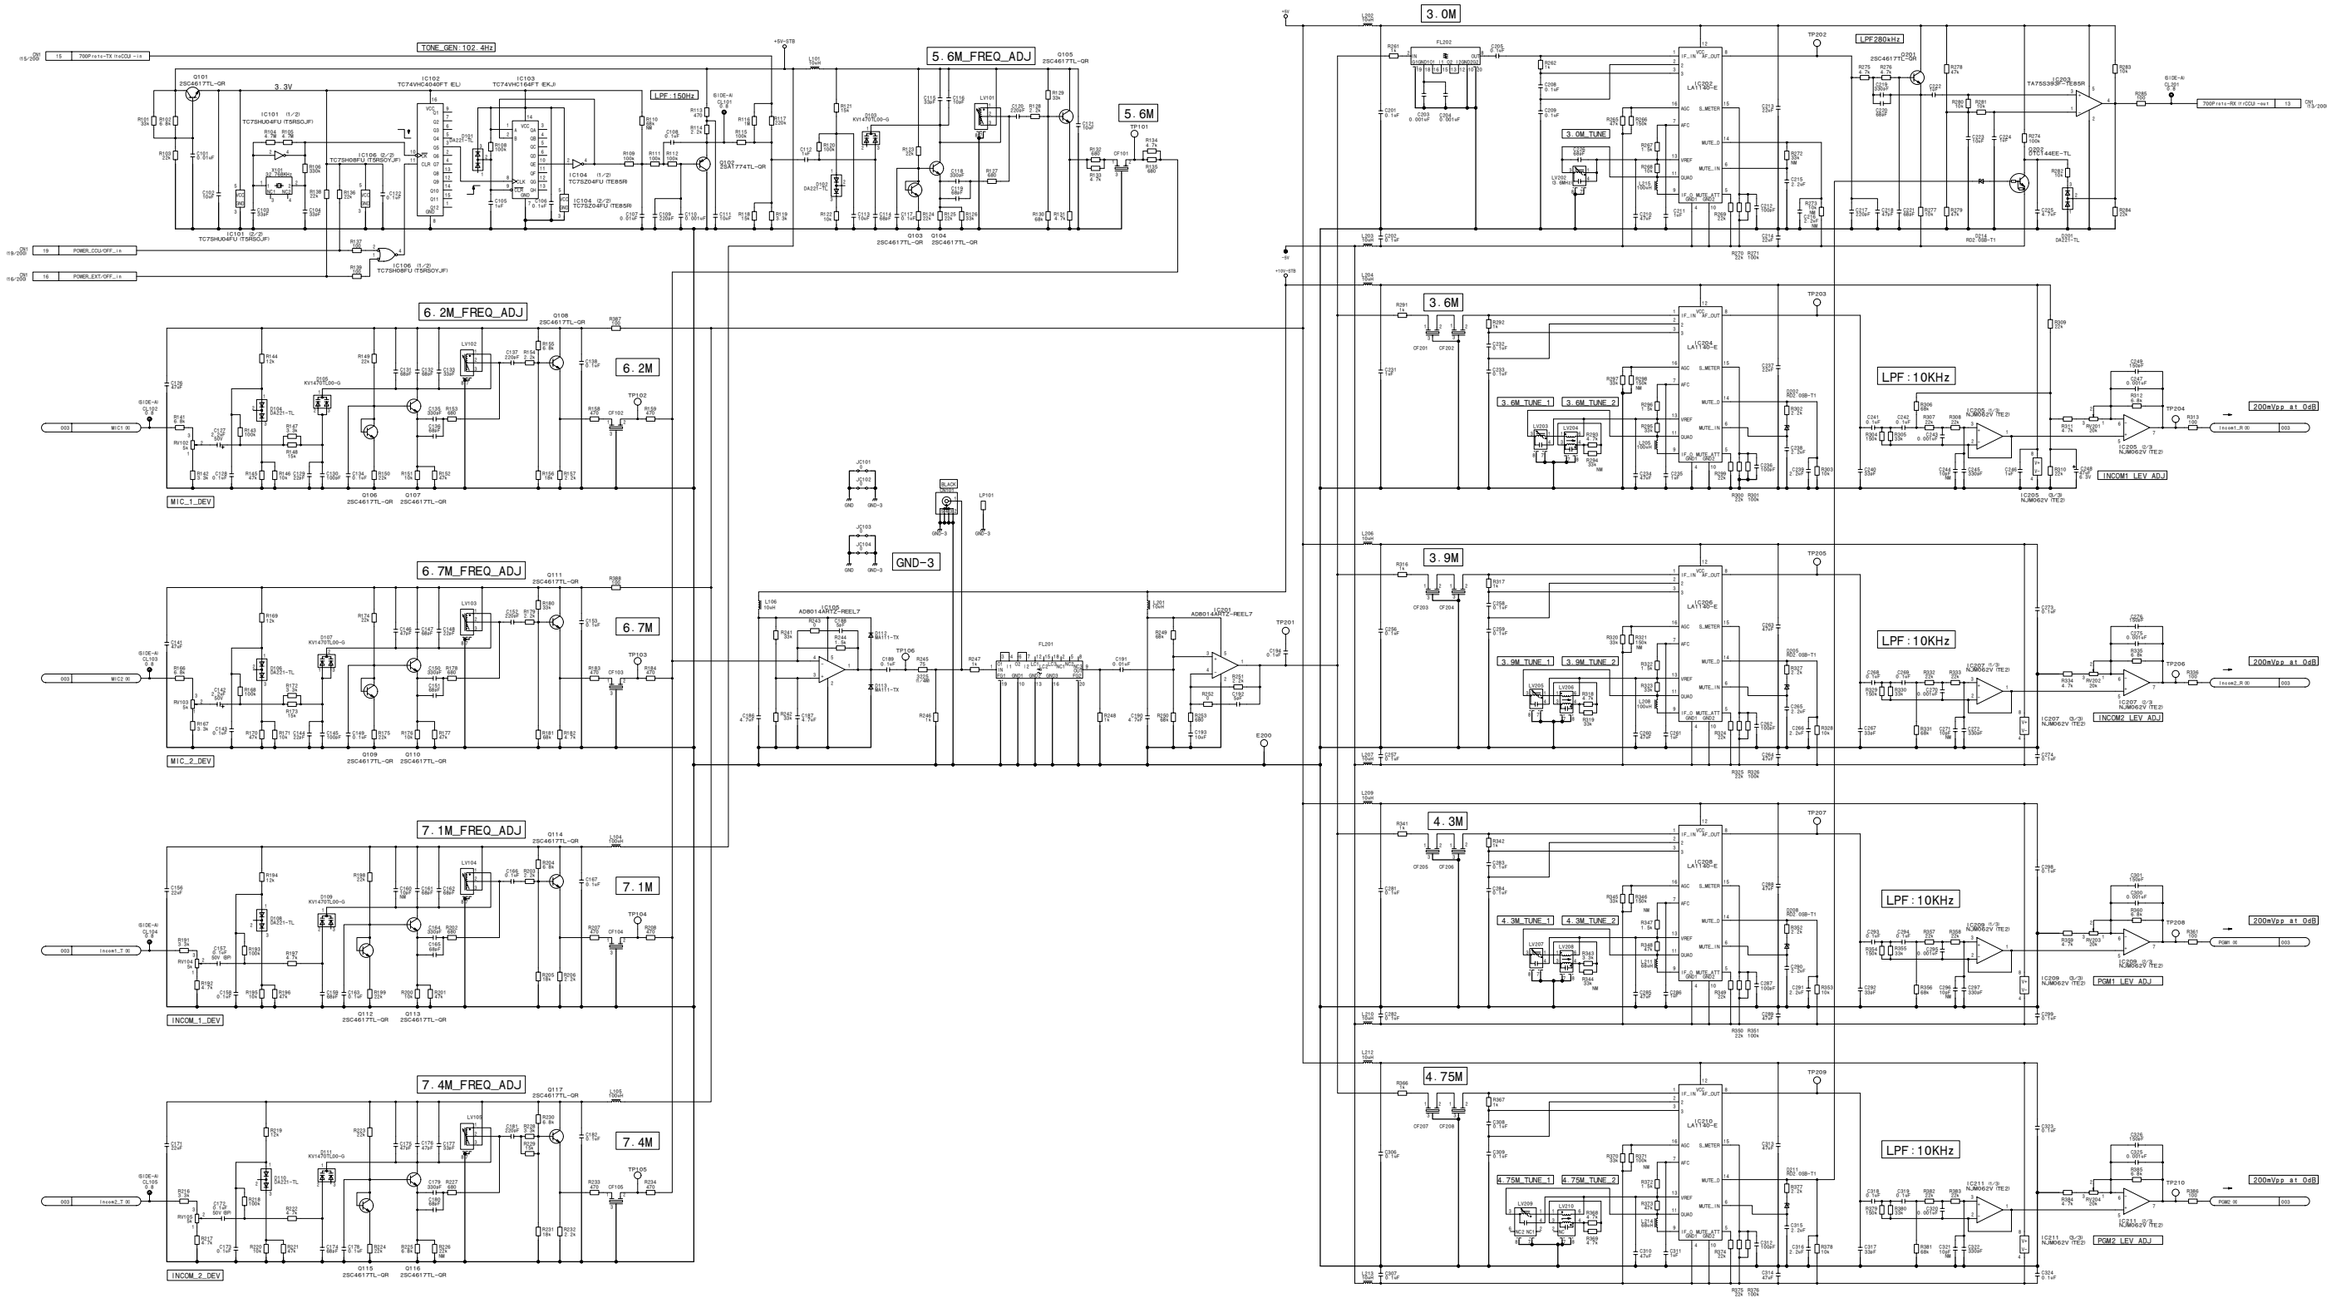
# TR-136 (3/7)

BOARD NO. 1-868-410-15, 32

HDC1550_TR-136_015_3
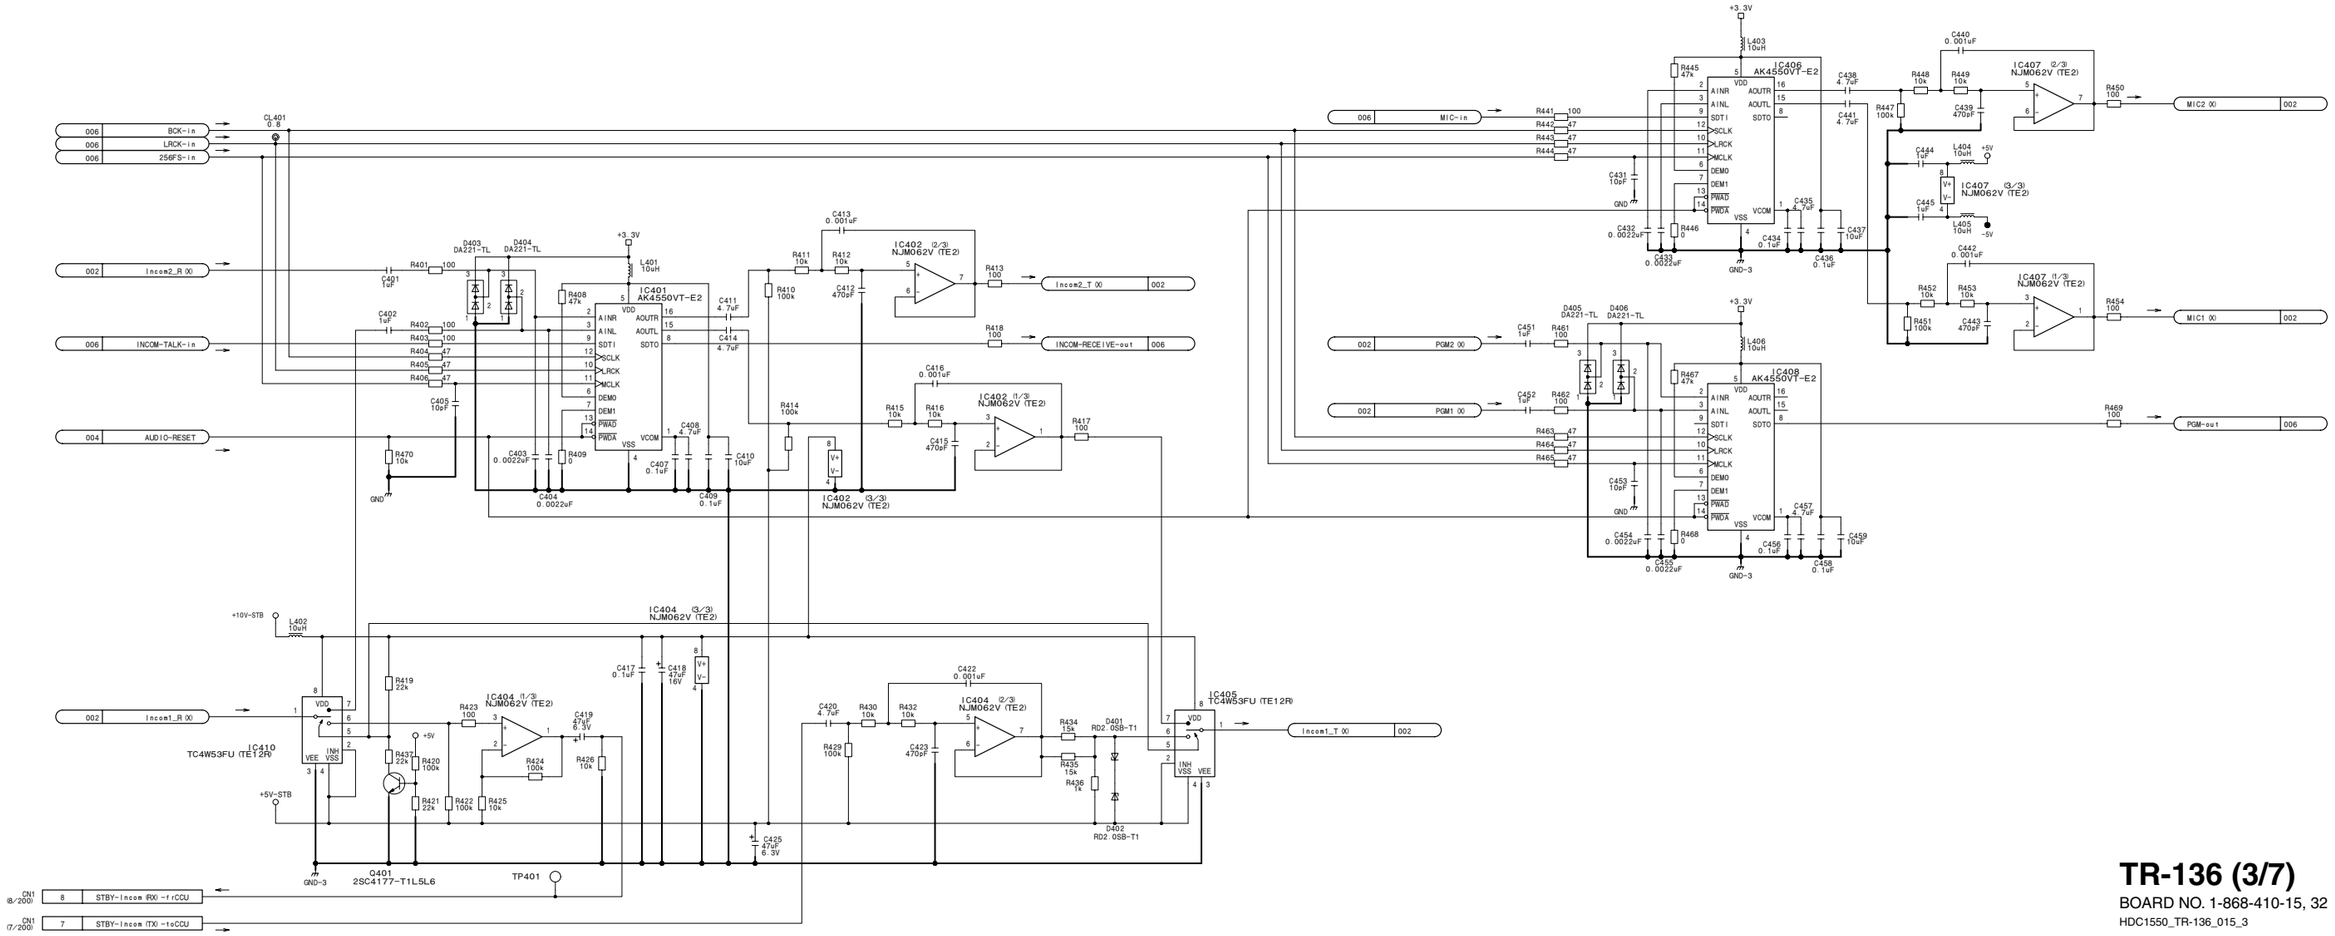
# TR-136 (4/7)

**SUFFIX: -15, 32**

TR-136 (4/7)
SUFFIX: -15, 32






**TR-136 (4/7)**

BOARD NO. 1-868-410-15, 32

HDC1550_TR-136_015_4

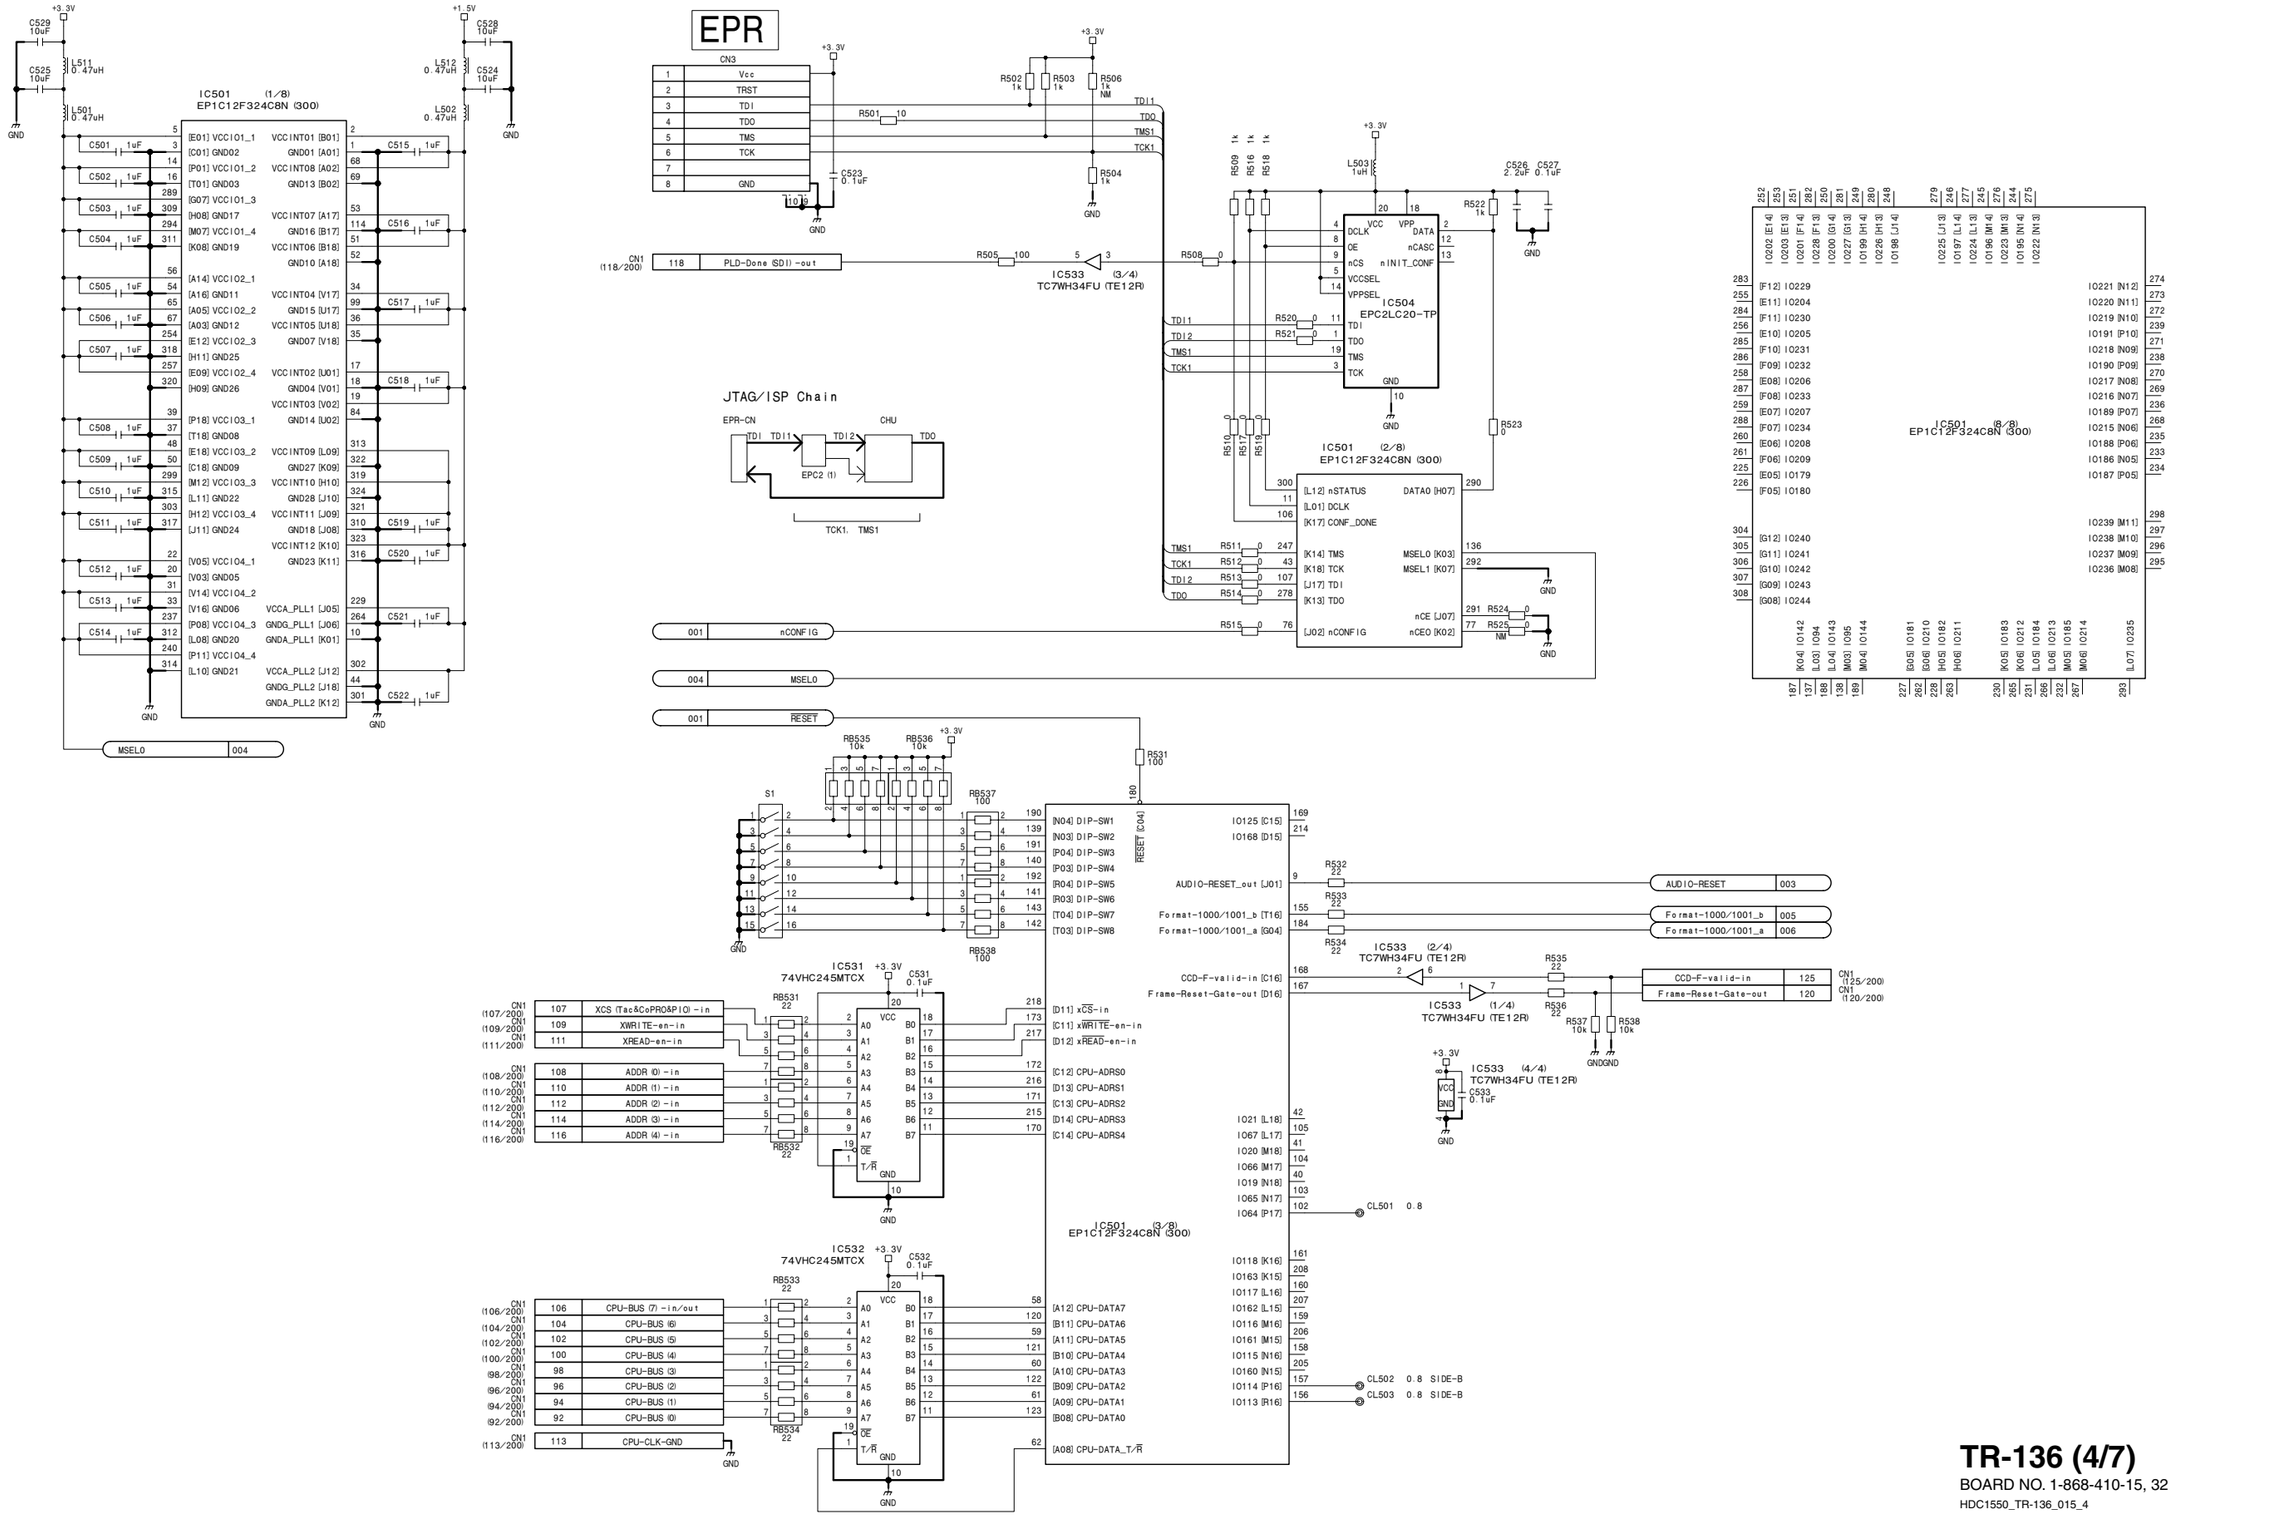TR-136 (5/7)
SUFFIX: -15, 32

## CHU Video Clock ／ PLL

IC501 (4/8) EP1C12F324C8N (300)

IC541 TLC2932AIPWR

IC542 TLC2932AIPWR

IC543 (1/3) TLC272CPWR-12

IC543 (2/3) TLC272CPWR-12

IC543 (3/3) TLC272CPWR-12

IC546 (2/2) TC7SZ32FU (TE85R)

IC546 (1/2) TC7SZ32FU (TE85R)

IC545 TC7W53FU (TE12R)

+3.3V-1

+3.3V

+5V

GND

IC501 (5/8) EP1C12F324C8N (300)

IC602 SN74LVC574APWR

IC603 SN74LVC574APWR

IC604 SN74LVC574APWR

IC601 TC7WH04FU (TE12R)

IC605 DAC902E/2K5

IC606 DAC902E/2K5

+3.3V-2

+5V

+2.5V

GND-2

IC607 LMH6732MFX/NOPB

IC608 LMH6732MFX/NOPB

-5V

CHU Video Proc.

## CHU VIDEO Proc.

FILTER
- Y Filtering->74MHz X PhaseO. 1
- Time Base Collector (CLK/H)
- R-Y Filtering->74MHz
- B-Y Filtering->74MHz

Clock Rate Convert
- Y:74MHz->129. 6MHz
- C:74MHz->86. 4MHz

SYNC/REF-Pulse Add
Y/R-Y/B-Y Digital Modulation
VIDEO TG (each Format)
SkinGate/Zebra MIX
TRIAX TEST Signal Generate
TRIAX Carrier Generate (PLL)

Digital Modulator

TR-136 (5/7)
BOARD NO. 1-868-410-15, 32
HDC1550_TR-136_015_5


4-136 (a)
HDC1000/V2 (J, E)

**TR-136 (6/7)** **SUFFIX: -15, 32**



**TR-136 (7/7)** **SUFFIX: -15, 32**

RET-Y
from MX-109

PROMPTER
from MX-109

RET PROCESS
Blanker
VIDEO TG (each Format)

IC801 AD8041ARZ-REEL
IC803 AD8041ARZ-REEL
IC802 (1/3) TLC272CPWR-12
IC802 (2/3) TLC272CPWR-12
IC802 (3/3) TLC272CPWR-12
IC805 TC7S66FU (TE85R)
IC806 ADS828E/1K
IC807 NJU7034V-TE2 (1/5)
IC807 NJU7034V-TE2 (2/5)
IC807 NJU7034V-TE2 (3/5)
IC807 NJU7034V-TE2 (4/5)
IC807 NJU7034V-TE2 (5/5)
Q801 XN6435-TX
Q802 (1/2) XN6534-TX
Q802 (2/2) XN6534-TX
IC851 SN74LVC574APWR
IC852 SN74LVC574APWR
IC853 SN74LVC574APWR
IC854 (1/2) TC7SZ32FU (TE85R)
IC854 (2/2) TC7SZ32FU (TE85R)
IC501 (7/8) EP1C12F324C8N (300)

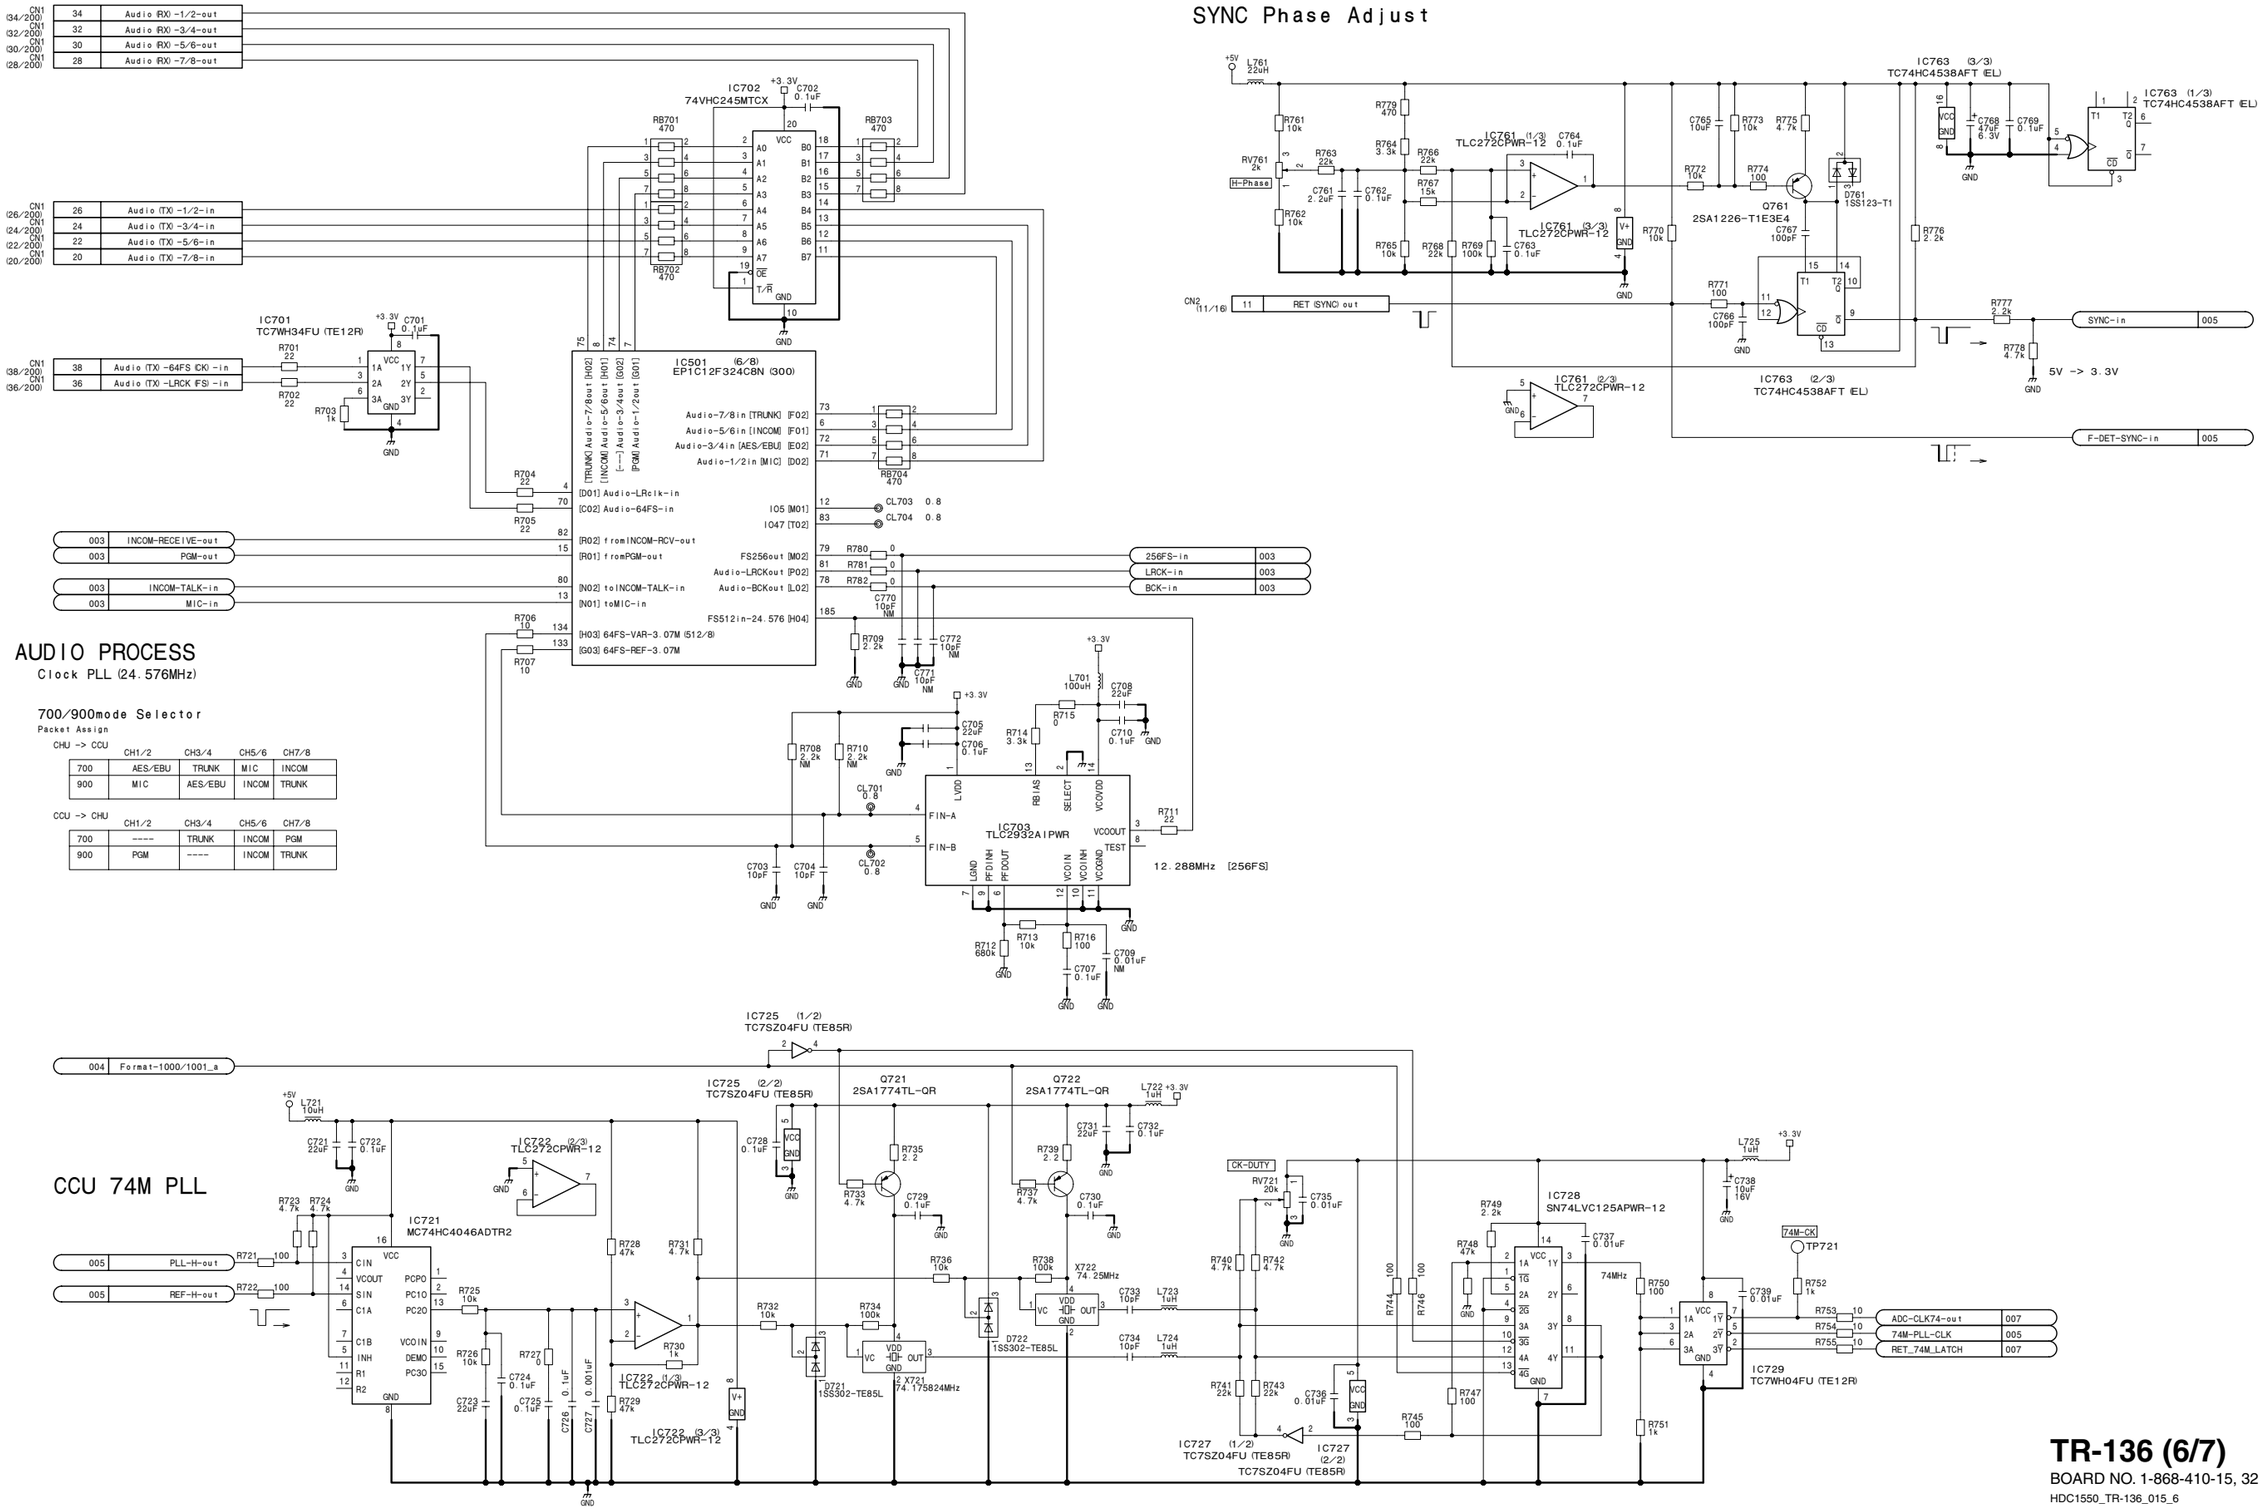

**TR-136 (7/7)**
BOARD NO. 1-868-410-15, 32
HDC1550_TR-136_015_7

VDA-63 (1/3)
SUFFIX: -12, 13, 31







VDA-63 (1/3)
BOARD NO. 1-865-931-12, 13, 31
HDC-1500_VDA-63_012_1


IC103
M62352AGP-D60Q
EPR
IC109
EPC2LC20-TP
IC110
EP1C6F256C6N
IC105
RN5VD28A-TL-FA
IC108
TC7SH08FU (TE85ROY,JF)
IC106
74VHCT245AMTCX
IC107
74VHCT245AMTCX
IC102
AD8014ART-REEL7
IC104
AD8014ART-REEL7
IC100
TC74VHCT574AFT (EL)
74CLK-DA
37CLK-DA
ADDR1
ADDR3
XWRIGHT-en
CPU-BUS0
CPU-BUS1
CPU-BUS3
CPU-BUS5
CPU-BUS7
ADDR0
XCS
ADDR2
Y0
Y2
Y5
Y8
Ps2
Ps5
Ps8
P-r1
P-r3
P-r5
P-r8
SEL7
SEL8
SEL9
VFC2
VFC4
VFC7
VFY0
VFY3
VFY5
VFY8
config
config
config

**VDA-63 (2/3)**
**SUFFIX: -12, 13, 31**

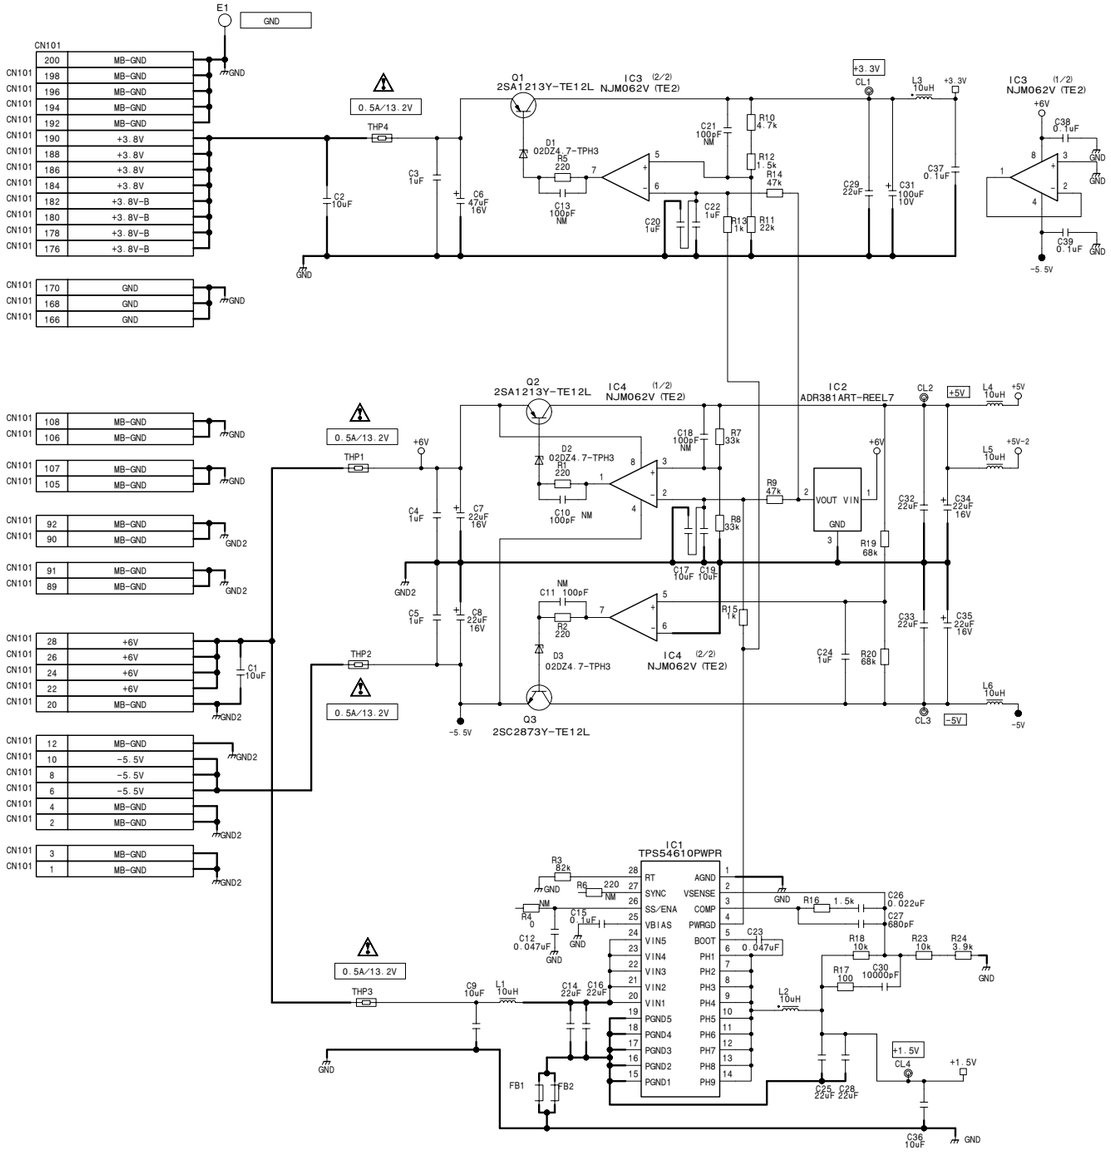


*NOTE

| REF NO. | SUFFIX 12 | SUFFIX 13~ |
|---|---|---|
| R198 R199 R203 R204 R205 | 3.3k | DELETED |

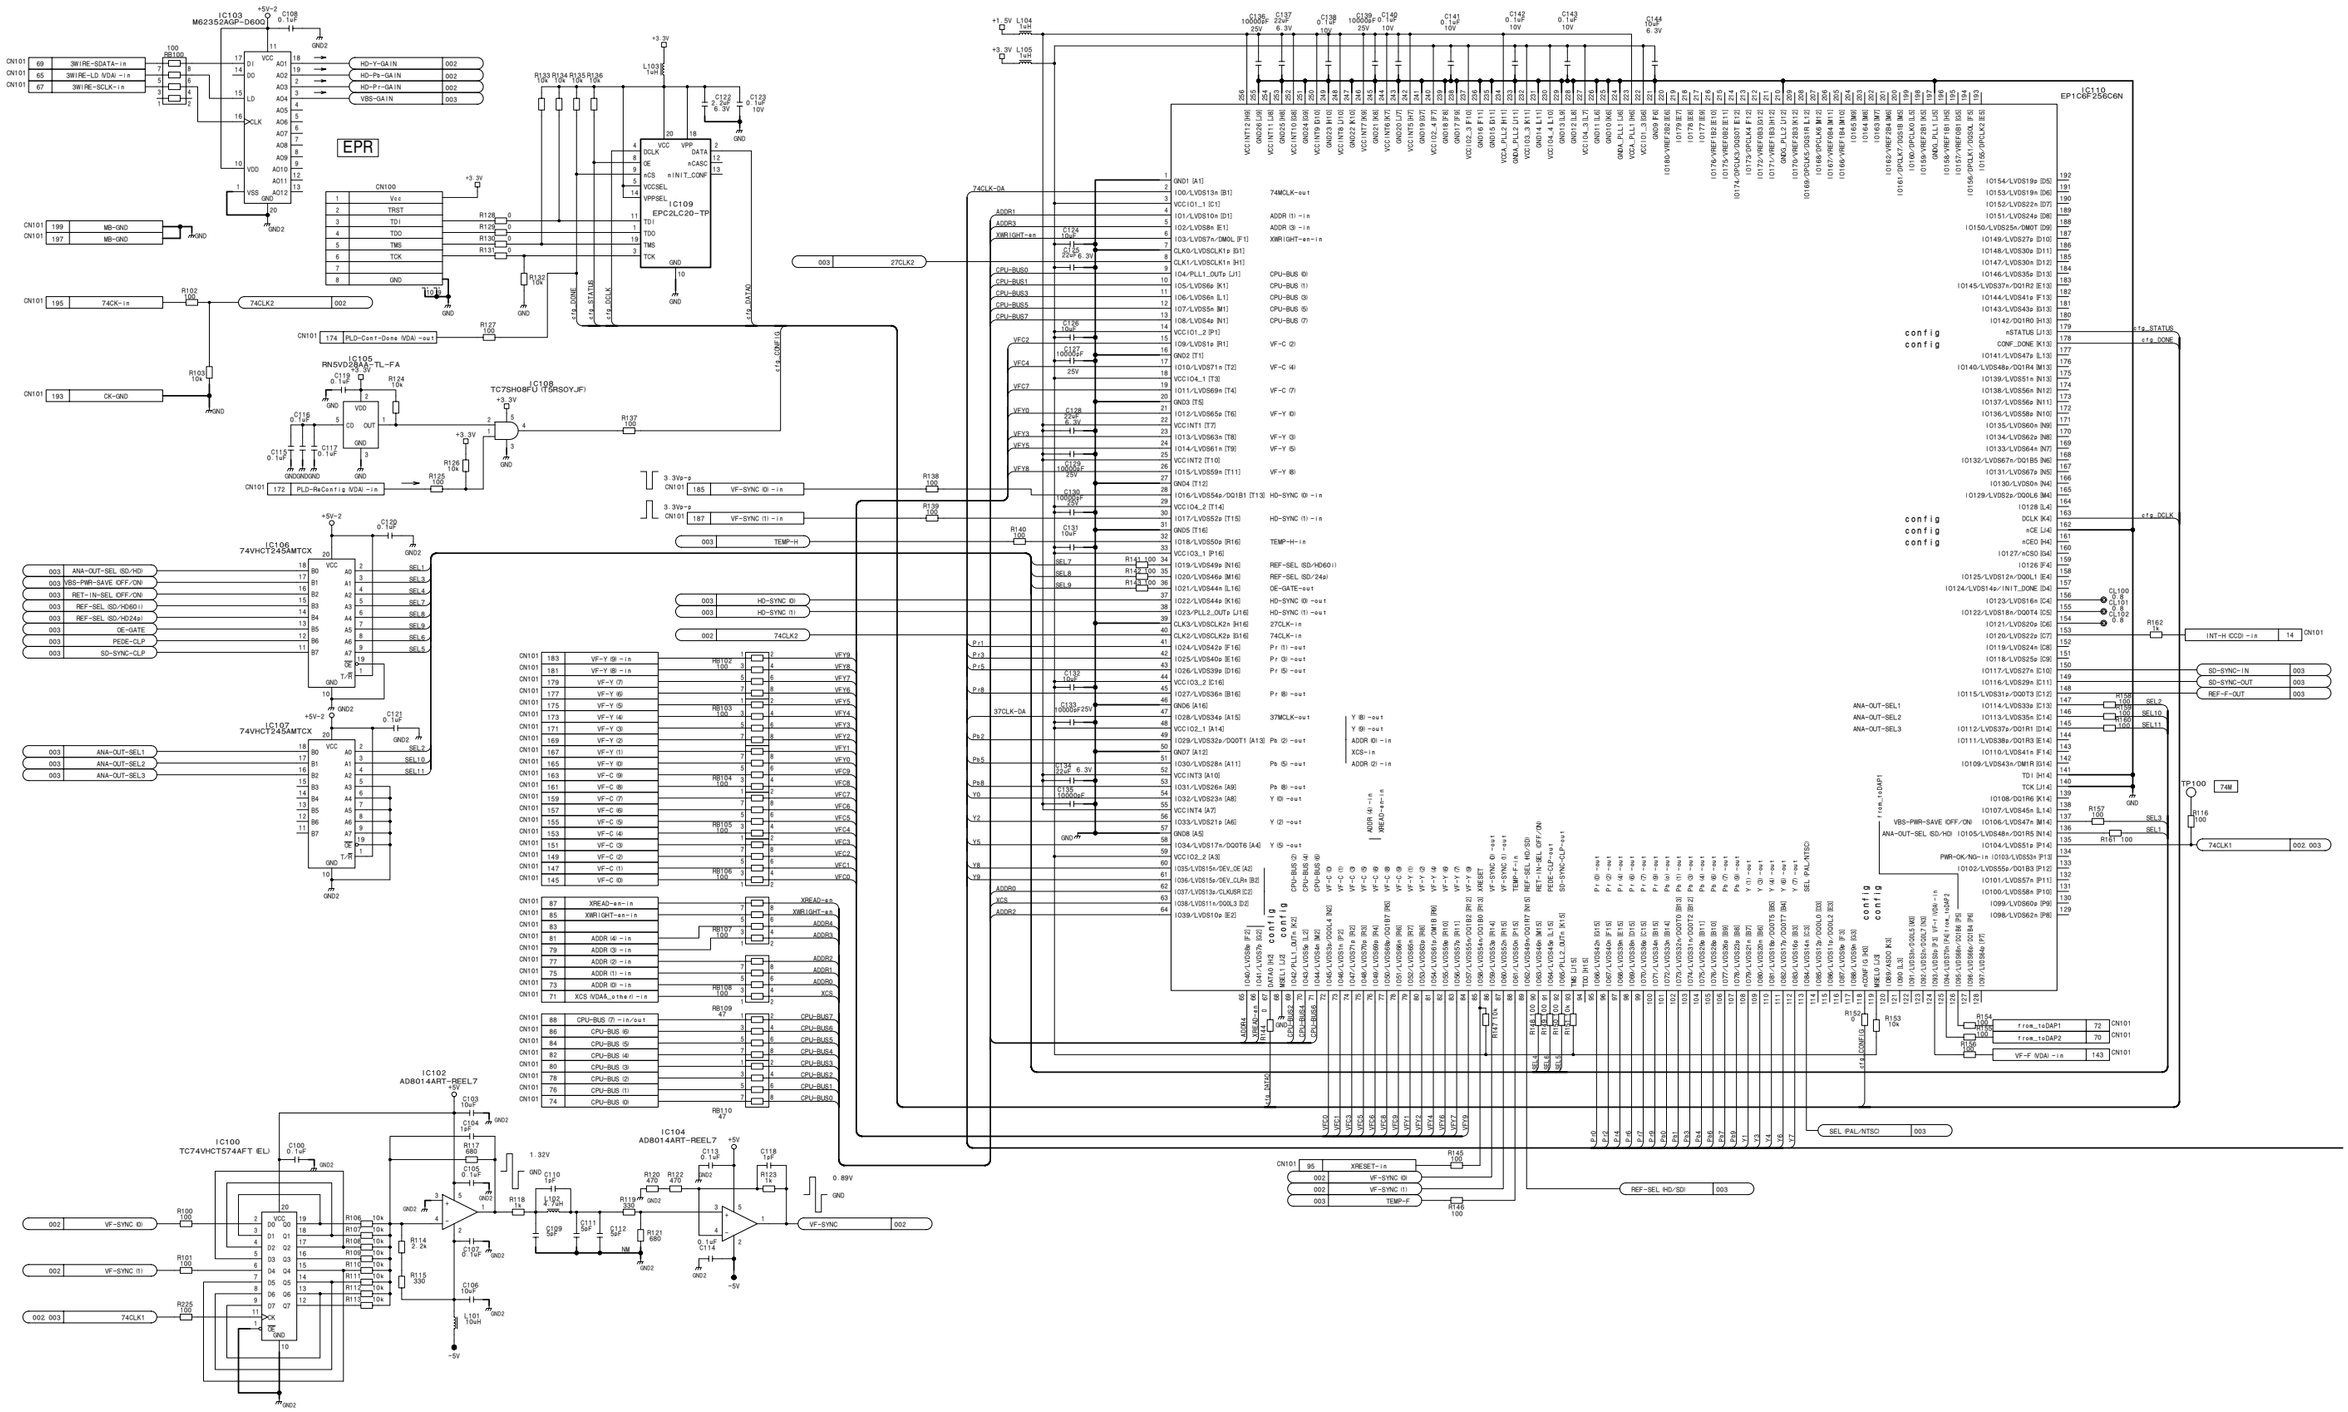**VDA-63 (2/3)**
BOARD NO. 1-865-931-12, 13, 31
HDC-1500_VDA-63_012_2

VDA-63 (3/3)
SUFFIX: -12, 13, 31

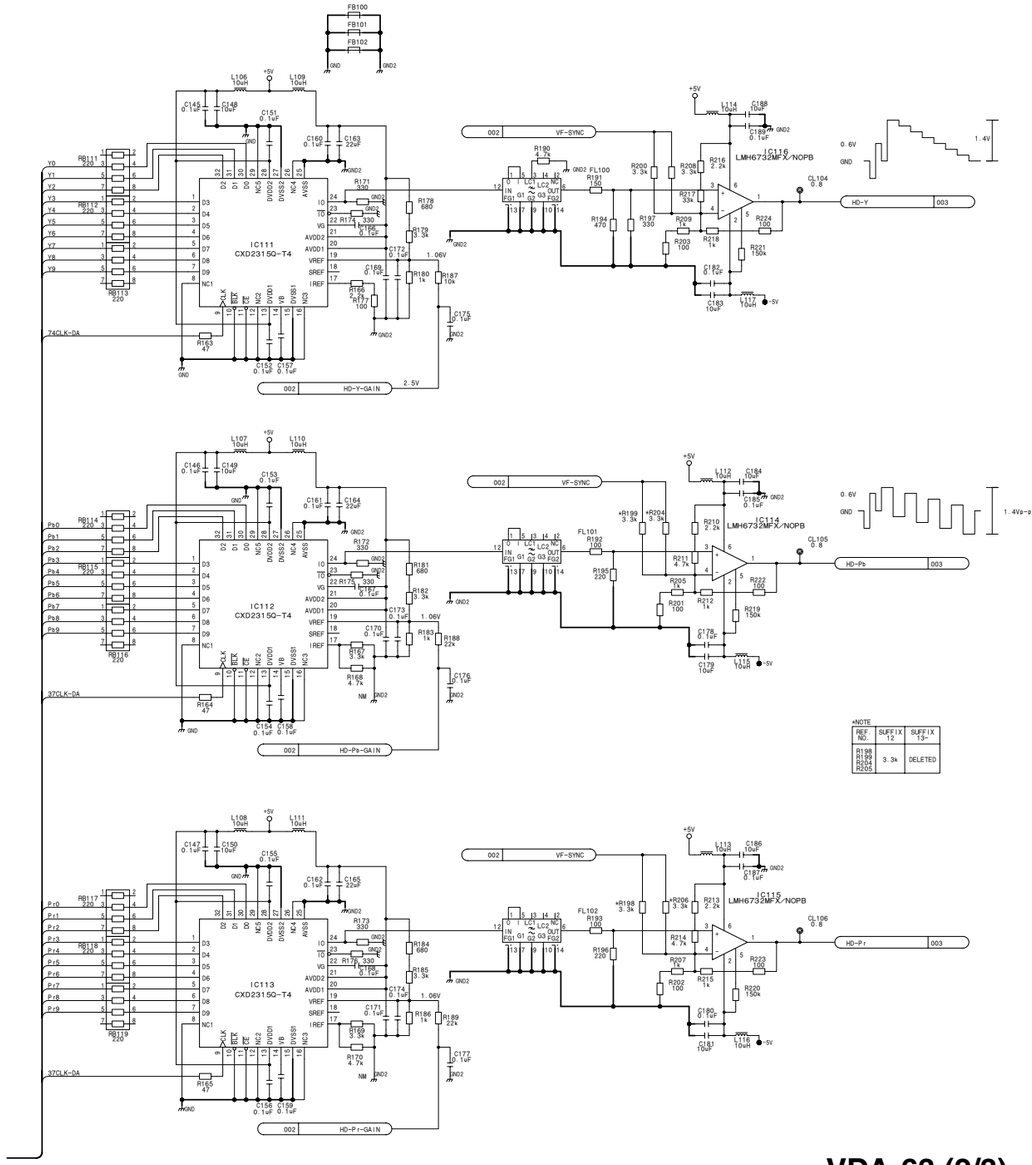



4-142

# VDA-63 (3/3)

**SUFFIX: -12, 13, 31**

VDA-63 (3/3)
SUFFIX: -12, 13, 31

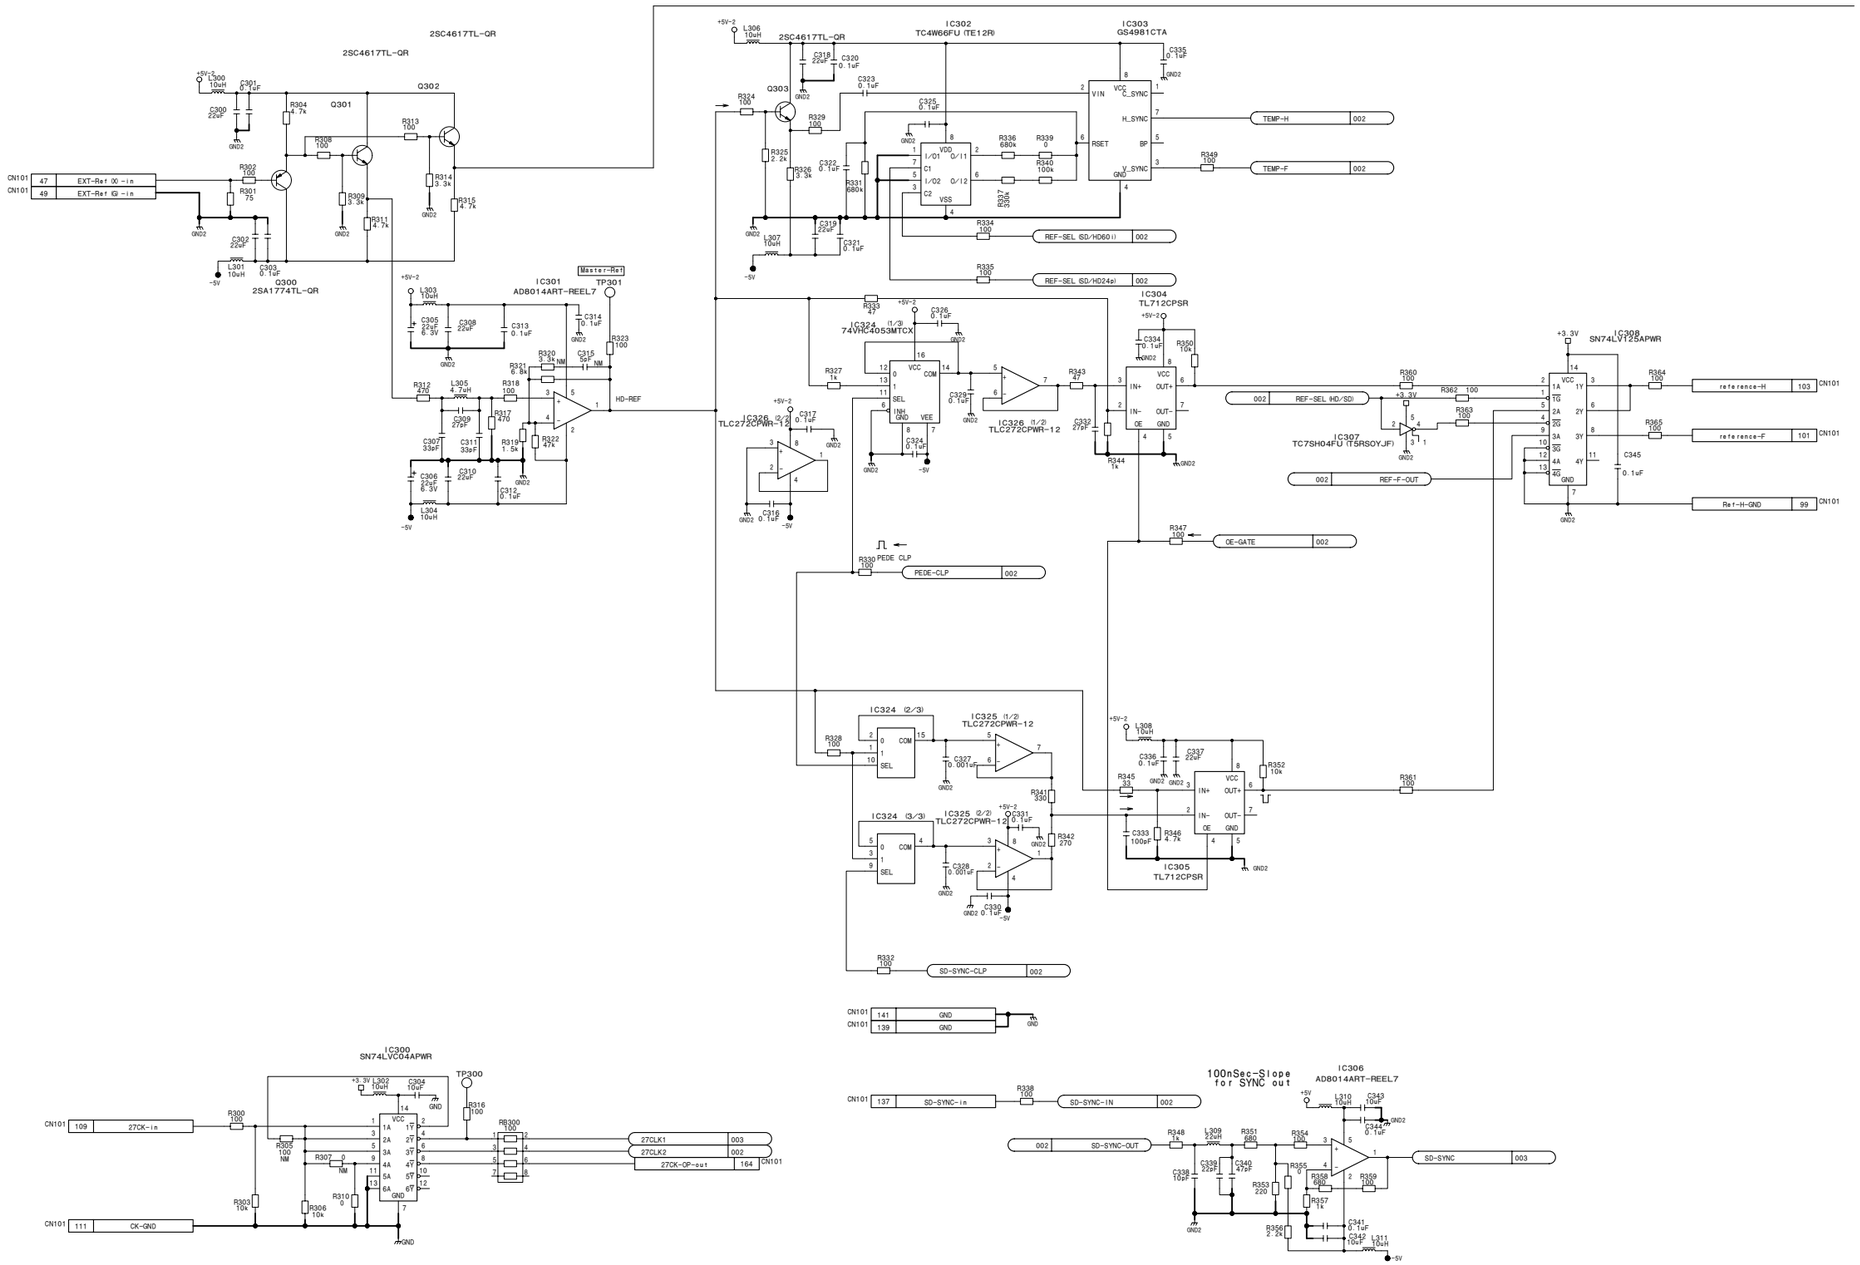


# VDA-63 (3/3)

BOARD NO. 1-865-931-12, 13, 31

HDC-1500_VDA-63_012_3

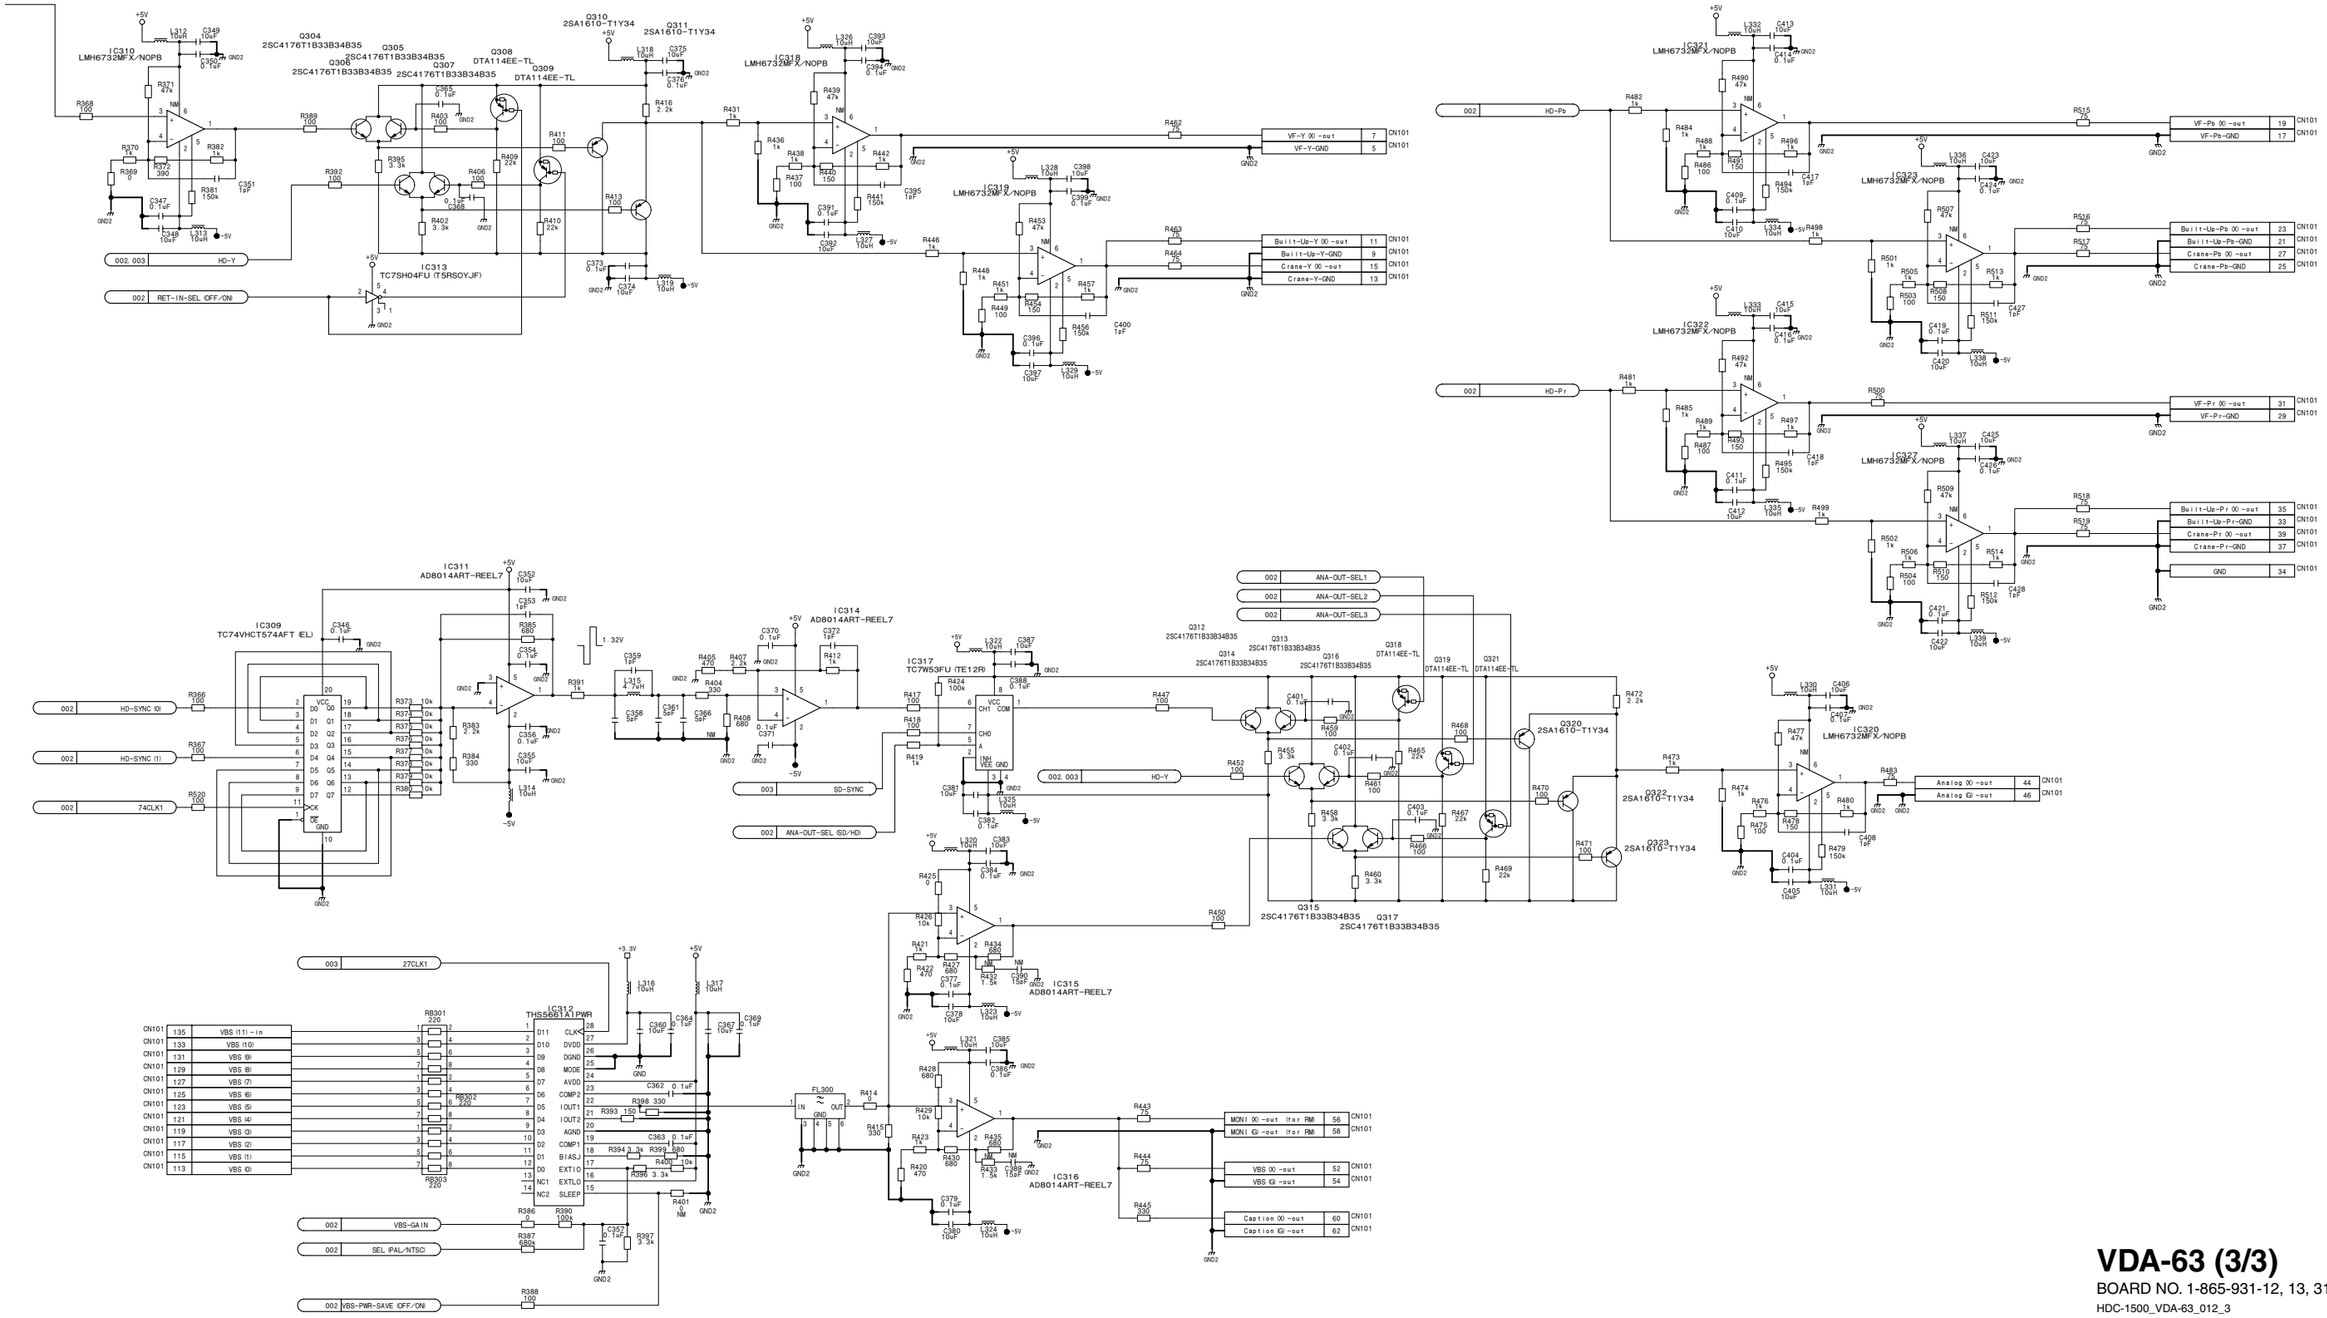


**Frame Wiring**
HDC1000/1100

**Frame Wiring** HDC1500/1550/1600/1400/1450




## Frame Wiring
HDC1500/1550/1600/1400/1450

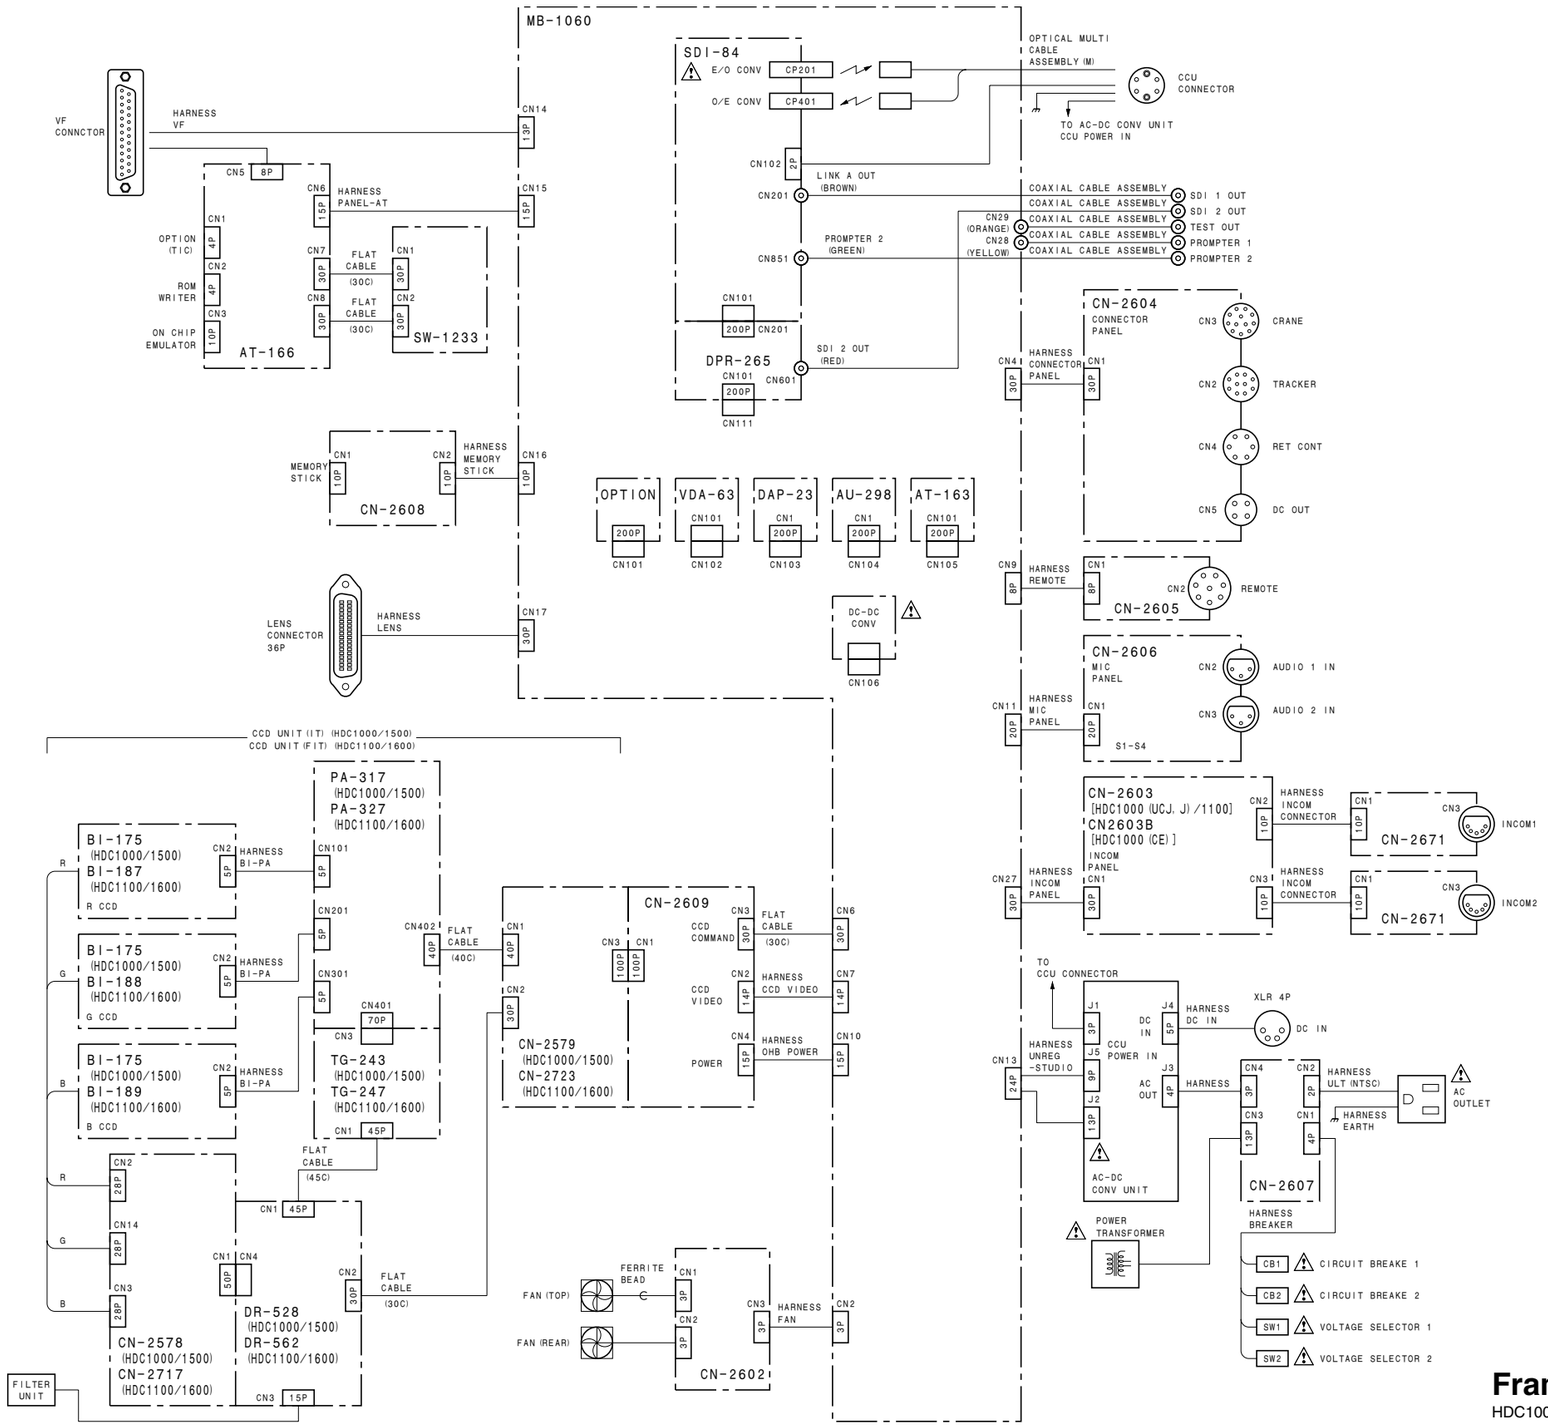


# Frame Wiring

HDC1580
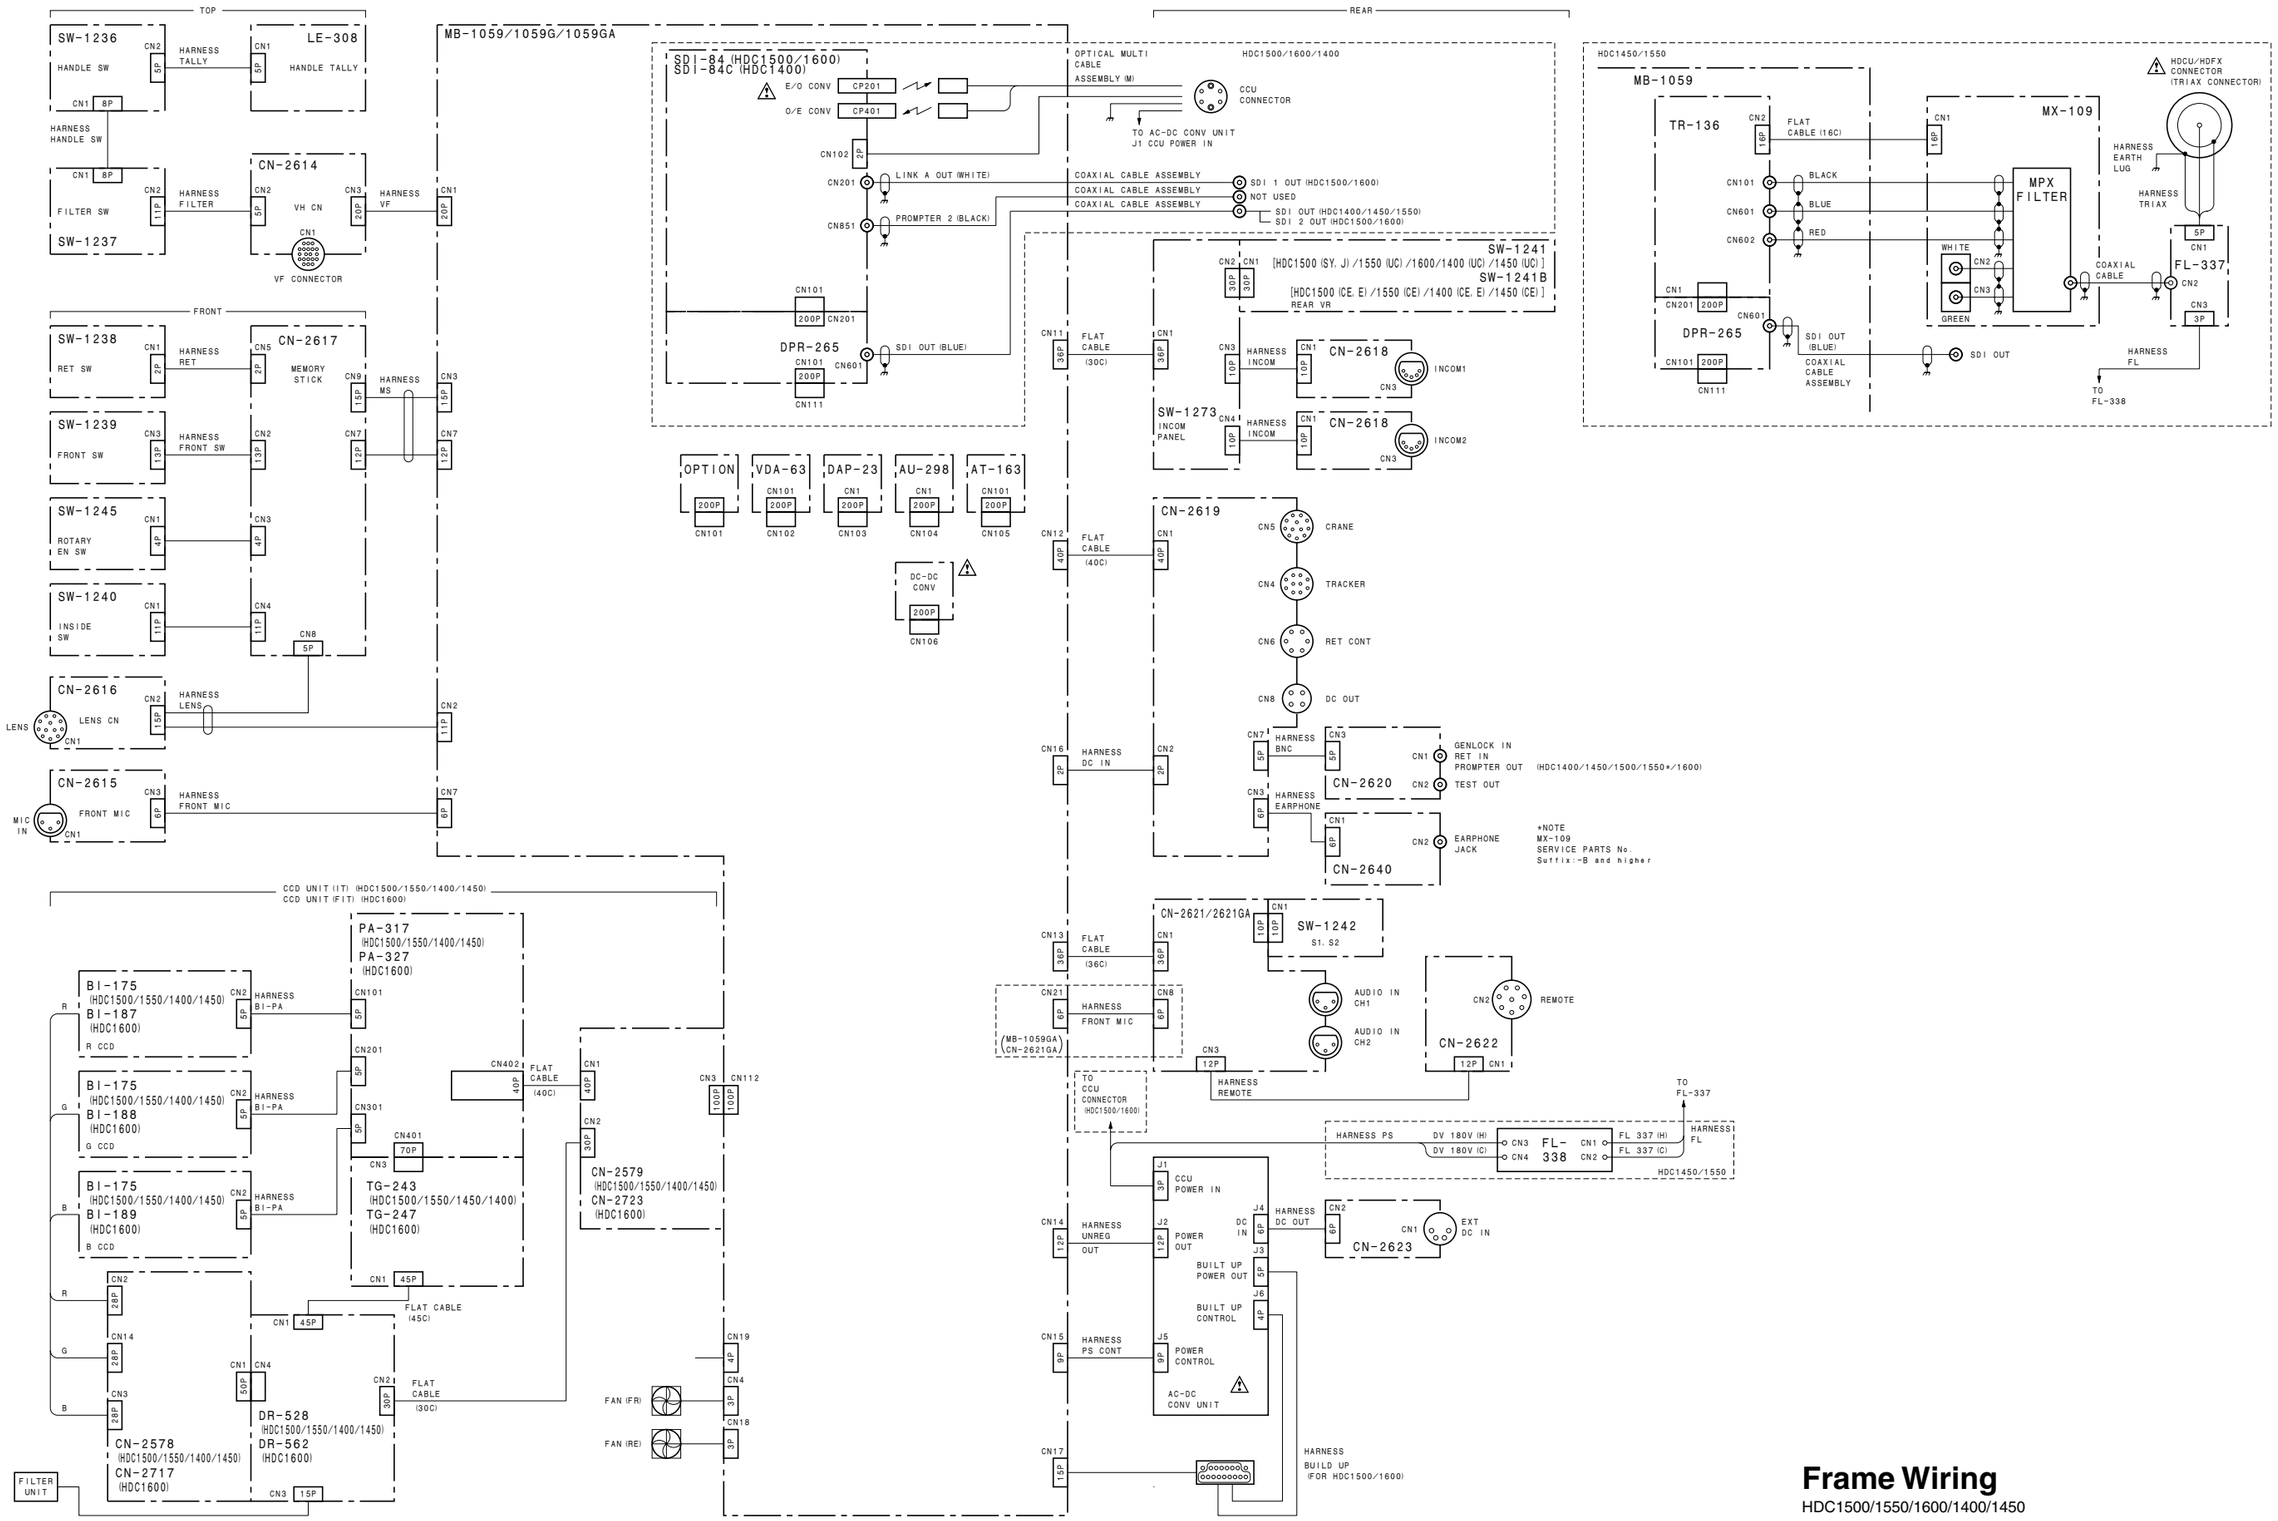
# Section 5
# Board Layouts


| Index | | Page |
|---|---|---|
| A. | AT-163 | 5-2 |
| | AT-166 | 5-3 |
| | AU-298 | 5-4 |
| B. | BI-175 | 5-5 |
| | BI-187 | 5-5 |
| | BI-188 | 5-6 |
| | BI-189 | 5-6 |
| C. | CN-2578 | 5-7 |
| | CN-2579 | 5-7 |
| | CN-2602 | 5-7 |
| | CN-2603 | 5-8 |
| | CN-2604 | 5-9 |
| | CN-2605 | 5-7 |
| | CN-2606 | 5-9 |
| | CN-2607 | 5-10 |
| | CN-2608 | 5-10 |
| | CN-2609 | 5-10 |
| | CN-2614 | 5-11 |
| | CN-2614B | 5-11 |
| | CN-2615 | 5-11 |
| | CN-2616 | 5-11 |
| | CN-2617 | 5-11 |
| | CN-2618 | 5-11 |
| | CN-2619 | 5-12 |
| | CN-2620 | 5-12 |
| | CN-2621 | 5-13 |
| | CN-2622 | 5-14 |
| | CN-2623 | 5-14 |
| | CN-2640 | 5-14 |
| | CN-2671 | 5-14 |
| | CN-2712 | 5-14 |
| | CN-2723 | 5-14 |
| D. | DAP-33 | 5-15 |
| | DPR-265 | 5-16 |
| | DR-528 | 5-18 |
| | DR-562 | 5-19 |
| | DU-369 | 5-19 |
| F. | FL-337 | 5-20 |
| | FL-338 | 5-20 |
| L. | LE-291 | 5-21 |
| | LE-308 | 5-21 |
| | LE-309 | 5-21 |
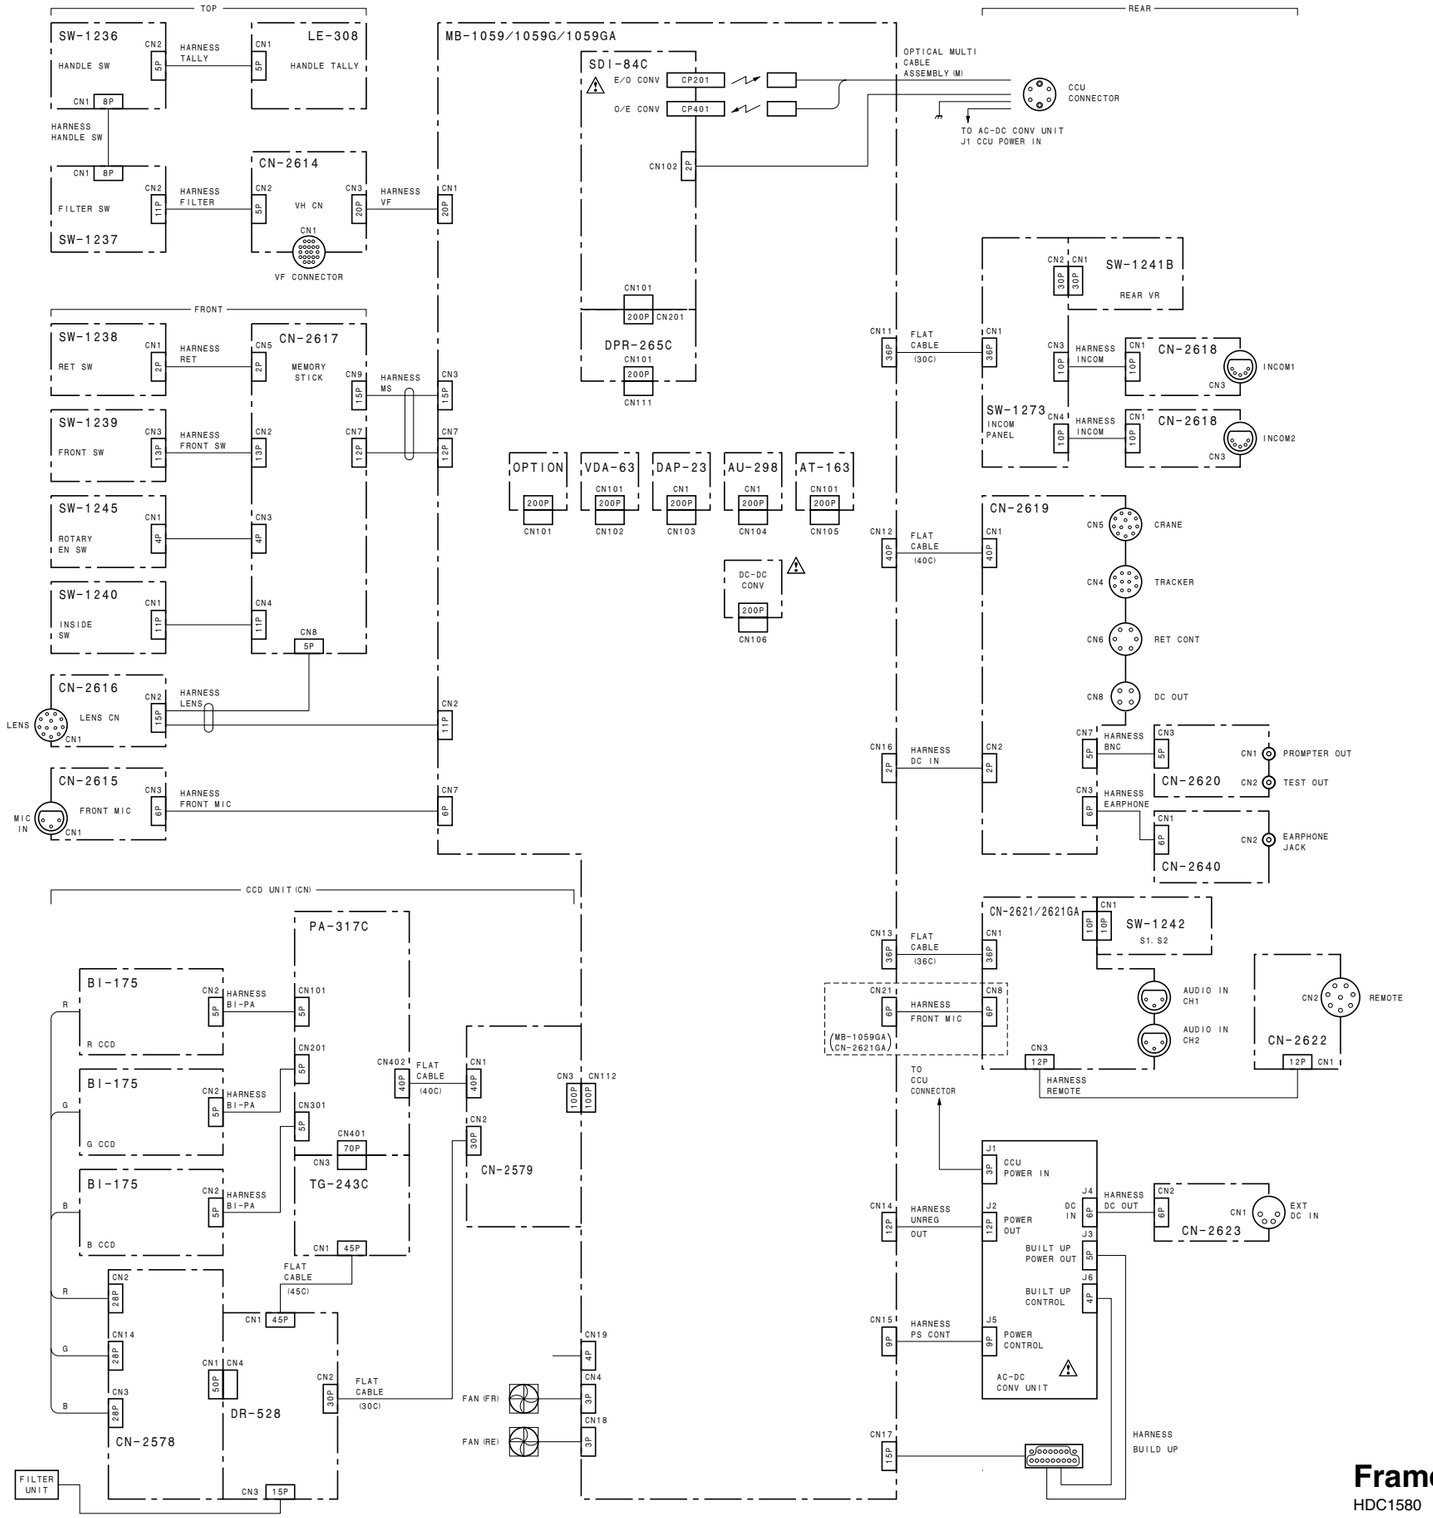
| Index | | Page |
|---|---|---|
| M. | MB-1059 | 5-23 |
| | MB-1059G | 5-23 (b) |
| | MB-1060 | 5-24 |
| | MX-109 | 5-27 |
| P. | PA-317 | 5-28 |
| | PA-327 | 5-29 |
| S. | SDI-84 | 5-30 |
| | SW-1233 | 5-32 |
| | SW-1236 | 5-33 |
| | SW-1237 | 5-33 |
| | SW-1238 | 5-33 |
| | SW-1239 | 5-33 |
| | SW-1240 | 5-33 |
| | SW-1241 | 5-34 |
| | SW-1242 | 5-33 |
| | SW-1245 | 5-33 |
| | SW-1273 | 5-35 |
| T. | TG-243 | 5-36 |
| | TG-247 | 5-37 |
| | TR-136 | 5-38 |
| V. | VDA-63 | 5-40 |

AT-163 (1-865-934-12)

| | | | | | | | | | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| C1 | *B5 | C161 | *A3 | C623 | B4 | | | | | | | | | | | | | | | | | | |
| C2 | *C4 | C162 | *A3 | C624 | *B4 | | | | | | | | | | | | | | | | | | |
| C3 | *C5 | C163 | *A3 | C625 | B4 | | | | | | | | | | | | | | | | | | |
| C4 | *C5 | C164 | B2 | C626 | B4 | | | | | | | | | | | | | | | | | | |
| C6 | *B5 | C165 | *A3 | C627 | *B4 | | | | | | | | | | | | | | | | | | |
| C7 | C5 | C166 | *B3 | C628 | B4 | | | | | | | | | | | | | | | | | | |
| C8 | C1 | C167 | B4 | C629 | *B4 | | | | | | | | | | | | | | | | | | |
| C10 | *C2 | C168 | *B4 | C630 | *B4 | | | | | | | | | | | | | | | | | | |
| C11 | *C5 | C169 | B3 | C631 | *B4 | | | | | | | | | | | | | | | | | | |
| C12 | *C2 | C170 | *B3 | C632 | *B4 | | | | | | | | | | | | | | | | | | |
| C13 | *C1 | C171 | B2 | C633 | *B4 | | | | | | | | | | | | | | | | | | |
| C14 | *C5 | C172 | A5 | C634 | B4 | | | | | | | | | | | | | | | | | | |
| C15 | *C1 | C173 | B5 | C635 | *B4 | | | | | | | | | | | | | | | | | | |
| C16 | *C1 | C174 | C3 | C636 | C5 | | | | | | | | | | | | | | | | | | |
| C17 | *C1 | C175 | *B3 | C637 | B5 | | | | | | | | | | | | | | | | | | |
| C18 | *B5 | C176 | *B1 | C638 | C4 | | | | | | | | | | | | | | | | | | |
| C19 | *B5 | C301 | B3 | C639 | C2 | | | | | | | | | | | | | | | | | | |
| C20 | *C5 | C302 | *B2 | C640 | C2 | | | | | | | | | | | | | | | | | | |
| C21 | *C5 | C303 | B2 | C641 | B4 | | | | | | | | | | | | | | | | | | |
| C22 | *C5 | C304 | B3 | C642 | B5 | | | | | | | | | | | | | | | | | | |
| C23 | *C5 | C305 | B2 | C643 | *B5 | | | | | | | | | | | | | | | | | | |
| C24 | *C1 | C306 | B3 | C644 | *B4 | | | | | | | | | | | | | | | | | | |
| C25 | C1 | C307 | B3 | C645 | *C5 | | | | | | | | | | | | | | | | | | |
| C26 | *C1 | C308 | B2 | C646 | *B2 | | | | | | | | | | | | | | | | | | |
| C27 | *C1 | C309 | *B3 | C647 | *C5 | | | | | | | | | | | | | | | | | | |
| C28 | C1 | C310 | B3 | | | | | | | | | | | | | | | | | | | | |
| C29 | C5 | C311 | *B3 | CL1 | B5 | | | | | | | | | | | | | | | | | | |
| C30 | *B1 | C312 | *B3 | CL2 | C5 | | | | | | | | | | | | | | | | | | |
| C31 | C5 | C313 | C4 | CL3 | C5 | | | | | | | | | | | | | | | | | | |
| C32 | C5 | C314 | C4 | CL4 | B1 | | | | | | | | | | | | | | | | | | |
| C33 | C5 | C315 | *C2 | CL101 | A5 | | | | | | | | | | | | | | | | | | |
| C34 | B1 | C316 | *C2 | | | | | | | | | | | | | | | | | | | | |
| C35 | B5 | C317 | B3 | CN101 | C3 | | | | | | | | | | | | | | | | | | |
| C36 | C5 | C318 | *C4 | CN102 | A5 | | | | | | | | | | | | | | | | | | |
| C102 | *C2 | C319 | B4 | CN401 | A2 | | | | | | | | | | | | | | | | | | |
| C103 | B1 | C320 | B4 | | | | | | | | | | | | | | | | | | | | |
| C104 | *C2 | C321 | *C3 | D1 | *C2 | | | | | | | | | | | | | | | | | | |
| C105 | *C2 | C401 | *A2 | D2 | *C5 | | | | | | | | | | | | | | | | | | |
| C106 | *B2 | C402 | *A2 | D3 | *C5 | | | | | | | | | | | | | | | | | | |
| C107 | *C2 | C403 | *A2 | D102 | C2 | | | | | | | | | | | | | | | | | | |
| C108 | *B3 | C404 | *A2 | D103 | C2 | | | | | | | | | | | | | | | | | | |
| C109 | *B3 | C406 | A2 | D104 | *B4 | | | | | | | | | | | | | | | | | | |
| C110 | *B4 | C407 | *B3 | D105 | *C2 | | | | | | | | | | | | | | | | | | |
| C111 | B2 | C408 | *B2 | D401 | *B3 | | | | | | | | | | | | | | | | | | |
| C112 | *C4 | C409 | B2 | D402 | *B3 | | | | | | | | | | | | | | | | | | |
| C113 | *B4 | C410 | *A2 | D403 | *B3 | | | | | | | | | | | | | | | | | | |
| C114 | *C4 | C411 | A2 | D404 | *B3 | | | | | | | | | | | | | | | | | | |
| C115 | *C3 | C412 | C2 | D601 | B4 | | | | | | | | | | | | | | | | | | |
| C116 | B3 | C413 | C2 | D602 | B4 | | | | | | | | | | | | | | | | | | |
| C117 | *C1 | C414 | *A2 | D603 | B4 | | | | | | | | | | | | | | | | | | |
| C119 | *A5 | C415 | *B1 | D604 | B4 | | | | | | | | | | | | | | | | | | |
| C120 | A4 | C416 | *B2 | D605 | B5 | | | | | | | | | | | | | | | | | | |
| C121 | *B2 | C417 | *B1 | D606 | B5 | | | | | | | | | | | | | | | | | | |
| C122 | A3 | C418 | *B1 | D607 | *B5 | | | | | | | | | | | | | | | | | | |
| C123 | *C3 | C419 | *B1 | D608 | *B5 | | | | | | | | | | | | | | | | | | |
| C124 | *B2 | C420 | *B1 | | | | | | | | | | | | | | | | | | | | |
| C125 | *C4 | C421 | *B1 | E1 | B4 | | | | | | | | | | | | | | | | | | |
| C126 | *C4 | C422 | *A1 | | | | | | | | | | | | | | | | | | | | |
| C127 | *A3 | C423 | *A1 | FB1 | C1 | | | | | | | | | | | | | | | | | | |
| C128 | A4 | C425 | *A1 | FB2 | C1 | | | | | | | | | | | | | | | | | | |
| C129 | A5 | C426 | *A1 | FB101 | C2 | | | | | | | | | | | | | | | | | | |
| C130 | A5 | C427 | B1 | FB102 | C2 | | | | | | | | | | | | | | | | | | |
| C131 | B4 | C428 | *A1 | FB103 | C2 | | | | | | | | | | | | | | | | | | |
| C132 | *C3 | C429 | *A1 | FB104 | C2 | | | | | | | | | | | | | | | | | | |
| C133 | *B4 | C430 | *A1 | FB105 | C2 | | | | | | | | | | | | | | | | | | |
| C134 | B4 | C431 | *A1 | FB106 | C2 | | | | | | | | | | | | | | | | | | |
| C135 | *B4 | C432 | *A1 | FB301 | C4 | IC114 | *A4 | IC140 | B2 | IC605 | *C5 | PH301 | B3 | R1 | *C4 | R30 | *B1 | R123 | *C2 | R149 | *C4 | R176 | *C3 | R202 | *A1 | R234 | *B4 | R314 | *C2 |
| C136 | A4 | C433 | *A1 | FB302 | C4 | IC115 | *B3 | IC141 | *A3 | IC606 | C2 | | | R2 | *C4 | R31 | *B1 | R124 | *C2 | R150 | *C4 | R177 | *C3 | R203 | *A1 | R236 | *C4 | R315 | B3 |
| C137 | A3 | C434 | *A1 | FB401 | *C3 | IC116 | *A3 | IC142 | *A3 | IC607 | *B4 | Q1 | *C2 | R3 | *C4 | R32 | *B1 | R125 | *C2 | R151 | *C4 | R178 | *B4 | R204 | *A2 | R237 | *C4 | R316 | B4 |
| C138 | B4 | C435 | B1 | FB402 | *C3 | IC117 | *B4 | IC143 | *B3 | IC608 | *B4 | Q2 | C5 | R4 | *C4 | R33 | *B1 | R126 | *C4 | R152 | C3 | R179 | *B4 | R205 | *A2 | R238 | *C4 | R317 | B4 |
| C139 | B4 | C601 | *B1 | FB403 | *C3 | IC118 | A3 | IC144 | *C4 | IC609 | B4 | Q3 | B5 | R5 | *C3 | R101 | C2 | R127 | *C4 | R153 | *C4 | R180 | B4 | R206 | B1 | R239 | C4 | R318 | *C3 |
| C140 | *A3 | C602 | *B1 | FB404 | *C3 | IC119 | B2 | IC145 | *B2 | IC610 | B4 | Q101 | *C1 | R6 | *C3 | R102 | *C2 | R128 | *C4 | R154 | *C4 | R181 | B4 | R207 | B1 | R240 | *B4 | R319 | B4 |
| C141 | *B4 | C603 | B3 | FB405 | *C3 | IC120 | C3 | IC146 | B1 | IC611 | C3 | Q102 | *C4 | R7 | *C2 | R103 | C2 | R129 | *C2 | R155 | A3 | R182 | *B4 | R208 | B1 | R241 | *B4 | R320 | *C4 |
| C142 | *B4 | C604 | B3 | FB406 | *C3 | IC121 | *B4 | IC301 | B3 | IC612 | *B1 | Q103 | *C4 | R8 | *C2 | R104 | *C1 | R130 | *C2 | R156 | *B4 | R183 | B4 | R209 | B2 | R242 | *C4 | R321 | *C3 |
| C143 | *B4 | C605 | C3 | FB407 | *C3 | IC122 | A3 | IC302 | B3 | | | Q104 | B2 | R9 | *C4 | R105 | *C1 | R131 | C2 | R157 | A3 | R184 | *B4 | R210 | B2 | R243 | *C4 | R322 | C4 |
| C144 | *B4 | C606 | C2 | | | IC123 | C3 | IC303 | *C2 | L1 | *B5 | Q105 | C4 | R10 | *C2 | R106 | *C2 | R132 | C2 | R158 | *B2 | R185 | B4 | R211 | B2 | R244 | *C4 | R323 | C4 |
| C145 | B3 | C607 | C3 | IC1 | *C1 | IC124 | *A2 | IC304 | *C2 | L2 | C1 | Q401 | C1 | R11 | *C5 | R107 | *C1 | R133 | *B2 | R159 | *B2 | R186 | *B4 | R212 | B2 | R245 | C3 | R401 | A2 |
| C146 | B3 | C608 | *C2 | IC2 | *B5 | IC125 | *B2 | IC305 | *B3 | L3 | *C2 | Q402 | *C1 | R12 | *C1 | R108 | C2 | R134 | C3 | R160 | *B4 | R187 | B4 | R213 | B2 | R254 | C3 | R402 | *B1 |
| C147 | B3 | C609 | *C2 | IC3 | *C5 | IC126 | B3 | IC306 | C4 | L4 | C1 | Q403 | C2 | R14 | *C5 | R109 | C2 | R135 | *B4 | R161 | *B4 | R188 | *B4 | R214 | B2 | R255 | *C2 | R403 | *B1 |
| C148 | B2 | C610 | *C2 | IC101 | *C2 | IC127 | *B2 | IC307 | *B3 | L5 | C5 | Q404 | C1 | R16 | *C1 | R110 | *C2 | R136 | *B4 | R162 | *B4 | R189 | B4 | R215 | *A4 | R301 | B3 | R404 | *A2 |
| C149 | *A2 | C611 | *C2 | IC102 | *C2 | IC128 | *A2 | IC308 | *C4 | L101 | *A5 | Q405 | B1 | R17 | *B5 | R111 | *C2 | R137 | C3 | R163 | *B4 | R190 | B4 | R216 | *A4 | R302 | B3 | R405 | *B1 |
| C150 | *A1 | C612 | *C2 | IC103 | *C2 | IC129 | B2 | IC401 | *A2 | L102 | *A4 | Q406 | *C1 | R18 | *B5 | R112 | *C4 | R138 | *C4 | R164 | *B4 | R191 | *B4 | R217 | *B4 | R303 | B2 | R406 | A2 |
| C151 | *B2 | C613 | *B4 | IC104 | *C2 | IC130 | B4 | IC402 | *A2 | L103 | *A3 | Q407 | C1 | R19 | *C5 | R113 | *C4 | R139 | *C4 | R165 | *B4 | R192 | *B4 | R218 | *B3 | R304 | *B3 | R407 | A2 |
| C152 | *A2 | C614 | *C4 | IC105 | *C1 | IC131 | *B3 | IC403 | A2 | L104 | C4 | Q408 | B1 | R20 | *C5 | R114 | *C4 | R140 | *C4 | R167 | C3 | R193 | B4 | R219 | *B3 | R305 | B3 | R408 | *A2 |
| C153 | *A2 | C615 | *C2 | IC106 | *B3 | IC132 | B2 | IC404 | A1 | L105 | A3 | Q409 | B1 | R22 | *B5 | R115 | *C4 | R141 | *C4 | R168 | C3 | R194 | B4 | R220 | *B3 | R306 | B3 | R409 | C1 |
| C154 | *B2 | C616 | *B5 | IC107 | *B3 | IC133 | *A4 | IC406 | *B3 | L301 | C4 | Q410 | B1 | R23 | *C5 | R116 | *C4 | R142 | *C4 | R169 | *C4 | R195 | B4 | R221 | *B3 | R307 | B3 | R410 | A1 |
| C155 | *A2 | C617 | *C4 | IC108 | *B2 | IC134 | B2 | IC407 | *B3 | L401 | B2 | Q411 | B1 | R24 | *C5 | R117 | *C4 | R143 | *C4 | R170 | *C4 | R196 | *A3 | R225 | *B3 | R308 | *C2 | R411 | *A1 |
| C156 | *A5 | C618 | B4 | IC109 | A4 | IC135 | *C3 | IC408 | B1 | L402 | *B1 | Q412 | C1 | R25 | *C5 | R118 | *B1 | R144 | *C4 | R171 | *B5 | R197 | *A3 | R226 | *B3 | R309 | *C2 | R412 | A2 |
| C157 | *A4 | C619 | B4 | IC110 | *B2 | IC136 | C3 | IC601 | *B2 | L403 | B1 | Q413 | C1 | R26 | *B5 | R119 | *C2 | R145 | *C4 | R172 | *C4 | R198 | *B2 | R227 | *C3 | R310 | *C2 | R413 | A2 |
| C158 | B2 | C620 | *B4 | IC111 | *C3 | IC137 | *A1 | IC602 | *C4 | L601 | B3 | Q414 | C1 | R27 | *C5 | R120 | *C4 | R146 | *B3 | R173 | *C4 | R199 | *B2 | R228 | C4 | R311 | *C4 | R414 | A1 |
| C159 | *A4 | C621 | *B4 | IC112 | *C3 | IC138 | B2 | IC603 | *B5 | L602 | *B5 | Q415 | C1 | R28 | *C1 | R121 | *C4 | R147 | *B3 | R174 | *B1 | R200 | *A2 | R231 | *B4 | R312 | *C2 | R415 | *A1 |
| C160 | B2 | C622 | *B4 | IC113 | B4 | IC139 | *A4 | IC604 | B5 | L603 | *B1 | Q416 | C1 | R29 | *B1 | R122 | *C4 | R148 | B3 | R175 | *C4 | R201 | *A2 | R232 | C4 | R313 | B3 | R416 | C1 |




**AT-163** -A SIDE-
SUFFIX: -12




**AT-163** -B SIDE-
SUFFIX: -12

| | | | | | | | | | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| R417 | A2 | R649 | C2 | | | | | | | | | | | | | | | | | | | | |
| R418 | A1 | R650 | B4 | | | | | | | | | | | | | | | | | | | | |
| R419 | *A1 | R651 | C2 | | | | | | | | | | | | | | | | | | | | |
| R420 | B1 | R652 | C2 | | | | | | | | | | | | | | | | | | | | |
| R421 | *C1 | R653 | C2 | | | | | | | | | | | | | | | | | | | | |
| R422 | *B3 | R654 | B4 | | | | | | | | | | | | | | | | | | | | |
| R423 | *B3 | R655 | B4 | | | | | | | | | | | | | | | | | | | | |
| R424 | *C2 | R656 | B5 | | | | | | | | | | | | | | | | | | | | |
| R425 | A1 | R657 | B4 | | | | | | | | | | | | | | | | | | | | |
| R426 | *A1 | R658 | B5 | | | | | | | | | | | | | | | | | | | | |
| R428 | *B3 | R659 | B5 | | | | | | | | | | | | | | | | | | | | |
| R429 | *B3 | R660 | *B5 | | | | | | | | | | | | | | | | | | | | |
| R430 | *A2 | R661 | *B5 | | | | | | | | | | | | | | | | | | | | |
| R431 | C2 | R662 | *B1 | | | | | | | | | | | | | | | | | | | | |
| R432 | C2 | R663 | *B1 | | | | | | | | | | | | | | | | | | | | |
| R433 | C2 | R664 | *B1 | | | | | | | | | | | | | | | | | | | | |
| R434 | C2 | R665 | *B4 | | | | | | | | | | | | | | | | | | | | |
| R435 | B1 | R666 | *C4 | | | | | | | | | | | | | | | | | | | | |
| R437 | C1 | R667 | *C5 | | | | | | | | | | | | | | | | | | | | |
| R438 | C2 | R668 | *C5 | | | | | | | | | | | | | | | | | | | | |
| R439 | C3 | R669 | *C5 | | | | | | | | | | | | | | | | | | | | |
| R442 | *A2 | R670 | *C4 | | | | | | | | | | | | | | | | | | | | |
| R443 | *A2 | R671 | B5 | | | | | | | | | | | | | | | | | | | | |
| R448 | B1 | R672 | B5 | | | | | | | | | | | | | | | | | | | | |
| R450 | B1 | | | | | | | | | | | | | | | | | | | | | | |
| R451 | *C3 | RB103 | *A5 | | | | | | | | | | | | | | | | | | | | |
| R452 | C3 | RB104 | *B2 | | | | | | | | | | | | | | | | | | | | |
| R461 | *A1 | RB105 | *C3 | | | | | | | | | | | | | | | | | | | | |
| R462 | *A1 | RB106 | *C3 | | | | | | | | | | | | | | | | | | | | |
| R468 | C2 | RB107 | *C3 | | | | | | | | | | | | | | | | | | | | |
| R469 | C3 | RB108 | *C3 | | | | | | | | | | | | | | | | | | | | |
| R479 | B1 | RB109 | C3 | | | | | | | | | | | | | | | | | | | | |
| R483 | *B2 | RB110 | C3 | | | | | | | | | | | | | | | | | | | | |
| R485 | C3 | RB111 | *A4 | | | | | | | | | | | | | | | | | | | | |
| R486 | *C1 | RB112 | *A4 | | | | | | | | | | | | | | | | | | | | |
| R487 | *C1 | RB113 | *A4 | | | | | | | | | | | | | | | | | | | | |
| R497 | *B2 | RB114 | *A4 | | | | | | | | | | | | | | | | | | | | |
| R498 | *A1 | RB115 | *B4 | | | | | | | | | | | | | | | | | | | | |
| R509 | C2 | RB116 | *B4 | | | | | | | | | | | | | | | | | | | | |
| R518 | C1 | RB117 | *B4 | | | | | | | | | | | | | | | | | | | | |
| R520 | B1 | RB118 | *B4 | | | | | | | | | | | | | | | | | | | | |
| R532 | C1 | RB119 | *B2 | | | | | | | | | | | | | | | | | | | | |
| R533 | *B3 | RB120 | *A4 | | | | | | | | | | | | | | | | | | | | |
| R534 | *B3 | RB121 | *A4 | | | | | | | | | | | | | | | | | | | | |
| R601 | *B4 | RB122 | *A4 | | | | | | | | | | | | | | | | | | | | |
| R602 | C2 | RB123 | *A4 | | | | | | | | | | | | | | | | | | | | |
| R603 | C3 | RB124 | *A4 | | | | | | | | | | | | | | | | | | | | |
| R604 | C3 | RB125 | *B4 | | | | | | | | | | | | | | | | | | | | |
| R605 | C3 | RB401 | B2 | | | | | | | | | | | | | | | | | | | | |
| R606 | C2 | RB402 | *C2 | | | | | | | | | | | | | | | | | | | | |
| R607 | C3 | RB403 | *C2 | | | | | | | | | | | | | | | | | | | | |
| R608 | *B1 | RB404 | *C3 | | | | | | | | | | | | | | | | | | | | |
| R609 | *B1 | RB405 | *C3 | | | | | | | | | | | | | | | | | | | | |
| R610 | C2 | RB406 | C3 | | | | | | | | | | | | | | | | | | | | |
| R611 | C3 | RB407 | C1 | | | | | | | | | | | | | | | | | | | | |
| R612 | B4 | RB408 | C1 | | | | | | | | | | | | | | | | | | | | |
| R613 | *B4 | RB409 | C2 | | | | | | | | | | | | | | | | | | | | |
| R614 | *B4 | RB410 | *B2 | | | | | | | | | | | | | | | | | | | | |
| R615 | *B4 | RB411 | *A1 | | | | | | | | | | | | | | | | | | | | |
| R616 | B4 | RB412 | *B1 | | | | | | | | | | | | | | | | | | | | |
| R617 | *B4 | RB413 | *A1 | | | | | | | | | | | | | | | | | | | | |
| R618 | B4 | RB414 | *B1 | | | | | | | | | | | | | | | | | | | | |
| R619 | B4 | RB415 | *B1 | | | | | | | | | | | | | | | | | | | | |
| R620 | *B4 | RB416 | *B1 | | | | | | | | | | | | | | | | | | | | |
| R621 | *B4 | RB417 | *A1 | | | | | | | | | | | | | | | | | | | | |
| R622 | *B4 | RB601 | B1 | | | | | | | | | | | | | | | | | | | | |
| R623 | *B4 | RB602 | B1 | | | | | | | | | | | | | | | | | | | | |
| R624 | *B4 | RB603 | C2 | | | | | | | | | | | | | | | | | | | | |
| R625 | B4 | RB604 | *B1 | | | | | | | | | | | | | | | | | | | | |
| R626 | *B4 | | | | | | | | | | | | | | | | | | | | | | |
| R627 | B4 | S1 | B2 | | | | | | | | | | | | | | | | | | | | |
| R628 | *B4 | | | | | | | | | | | | | | | | | | | | | | |
| R629 | B4 | THP1 | *B5 | | | | | | | | | | | | | | | | | | | | |
| R630 | *B4 | THP2 | *C1 | | | | | | | | | | | | | | | | | | | | |
| R631 | *B4 | THP3 | *C5 | | | | | | | | | | | | | | | | | | | | |
| R632 | *B4 | THP101 | C4 | | | | | | | | | | | | | | | | | | | | |
| R633 | *B4 | | | | | | | | | | | | | | | | | | | | | | |
| R634 | *B4 | X101 | B4 | | | | | | | | | | | | | | | | | | | | |
| R635 | B4 | X301 | *B3 | | | | | | | | | | | | | | | | | | | | |
| R636 | *B4 | | | | | | | | | | | | | | | | | | | | | | |
| R637 | *B4 | *:B SIDE | | | | | | | | | | | | | | | | | | | | | |
| R638 | B4 | | | | | | | | | | | | | | | | | | | | | | |
| R639 | B4 | | | | | | | | | | | | | | | | | | | | | | |
| R640 | *B4 | | | | | | | | | | | | | | | | | | | | | | |
| R641 | *B4 | | | | | | | | | | | | | | | | | | | | | | |
| R642 | C5 | | | | | | | | | | | | | | | | | | | | | | |
| R643 | C5 | | | | | | | | | | | | | | | | | | | | | | |
| R644 | C4 | | | | | | | | | | | | | | | | | | | | | | |
| R645 | C4 | | | | | | | | | | | | | | | | | | | | | | |
| R646 | *B4 | | | | | | | | | | | | | | | | | | | | | | |
| R647 | C5 | | | | | | | | | | | | | | | | | | | | | | |
| R648 | *B4 | | | | | | | | | | | | | | | | | | | | | | |

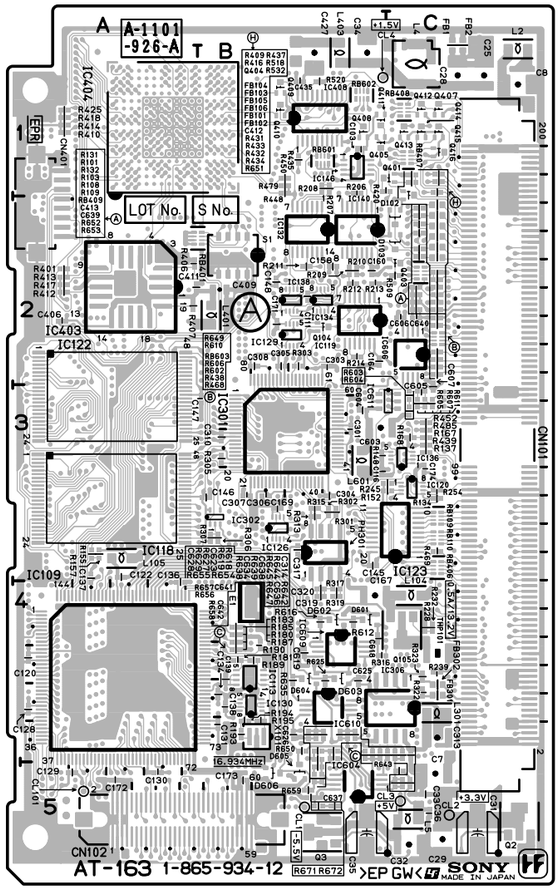AT-166 (1-867-406-11)

| | | | |
|---|---|---|---|
| C3 | *C1 | D8 | C1 |
| C4 | *C1 | D9 | C1 |
| C5 | C1 | D10 | C2 |
| C8 | C1 | D11 | C2 |
| C9 | C1 | D12 | *A1 |
| C10 | *C1 | D13 | *A1 |
| C12 | *C1 | D14 | *B1 |
| C13 | *C1 | D15 | *B1 |
| C14 | *C1 | D16 | *B1 |
| C15 | *C1 | | |
| C16 | C1 | E1 | *C2 |
| C18 | *B1 | | |
| C19 | B1 | FB1 | *C1 |
| C21 | *B1 | FB2 | *C1 |
| C22 | *B1 | FB5 | *C2 |
| C23 | B1 | FB6 | *C2 |
| C24 | *B1 | FB7 | C1 |
| C25 | C2 | FB8 | C1 |
| C31 | *B2 | | |
| C33 | *B2 | FL6 | C2 |
| C37 | C1 | FL7 | C2 |
| C38 | *C2 | FL8 | C2 |
| C39 | *C1 | FL10 | C2 |
| C43 | *A2 | FL11 | C2 |
| C44 | *A2 | FL12 | C2 |
| C45 | *B1 | FL13 | C2 |
| C46 | *B2 | FL14 | C2 |
| C47 | *A1 | | |
| C48 | *A2 | IC1 | *C1 |
| C49 | *A1 | IC4 | *C1 |
| C50 | *A1 | IC6 | *B2 |
| C51 | *A2 | IC7 | *B2 |
| C52 | *A1 | IC8 | *C1 |
| C53 | *A1 | IC10 | *C2 |
| C54 | *B1 | IC12 | *B2 |
| C55 | *A1 | IC13 | *C2 |
| C56 | *A2 | IC16 | C1 |
| C57 | *B1 | IC18 | *A2 |
| C58 | *B1 | IC20 | *B2 |
| C60 | *B2 | IC21 | A1 |
| C61 | *B2 | IC22 | A2 |
| C62 | *B2 | IC23 | A1 |
| C63 | B2 | IC24 | A2 |
| C64 | *B2 | IC25 | *C2 |
| C65 | B2 | | |
| C66 | *B2 | L1 | C1 |
| C67 | A2 | L2 | C1 |
| C68 | A1 | L4 | *A2 |
| C69 | A2 | L5 | C1 |
| C70 | A1 | | |
| C71 | *C2 | Q1 | C1 |
| C72 | C1 | Q2 | C1 |
| C73 | *C2 | Q4 | *B2 |
| | | | |
| CL1 | *C1 | R6 | *C1 |
| CL2 | *B1 | R10 | C1 |
| CL3 | *B1 | R11 | C1 |
| CL4 | *C1 | R15 | C2 |
| | | R16 | C2 |
| CN1 | *C2 | R17 | *C1 |
| CN2 | *A2 | R18 | *C1 |
| CN3 | *B2 | R19 | *C1 |
| CN5 | *C2 | R21 | C1 |
| CN6 | *C1 | R22 | C1 |
| CN7 | *A1 | R26 | C2 |
| CN8 | *A2 | R27 | C2 |
| | | R28 | C2 |
| D1 | C1 | R29 | C2 |
| D3 | *C2 | R30 | C2 |
| D4 | *C2 | R31 | C2 |

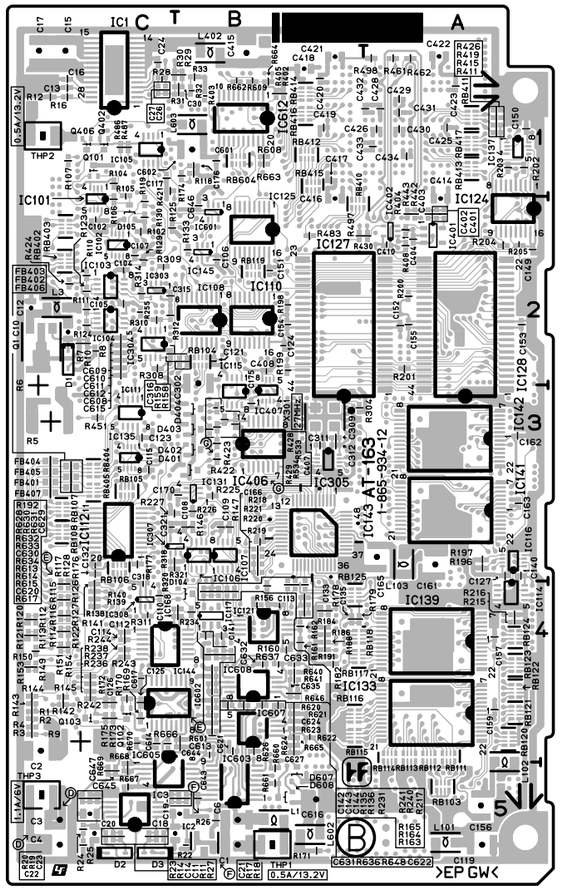


**AT-166** -A SIDE-
SUFFIX: -11




**AT-166** -B SIDE-
SUFFIX: -11

| | | | |
|---|---|---|---|
| R32 | *C1 | R138 | *B1 |
| R33 | *C1 | R139 | B2 |
| R34 | *C1 | R140 | B2 |
| R35 | *C1 | R141 | B2 |
| R37 | *C1 | R142 | B2 |
| R38 | *C1 | R143 | *C2 |
| R39 | *C1 | R144 | C1 |
| R40 | *C2 | R145 | *B2 |
| R41 | *C2 | R146 | *B1 |
| R45 | C1 | R147 | *C2 |
| R46 | C2 | R148 | *C2 |
| R51 | *B2 | R149 | *C2 |
| R53 | *B2 | R150 | *C2 |
| R54 | *B2 | R151 | *B1 |
| R63 | *C1 | R152 | *B1 |
| R64 | *C1 | R153 | *A1 |
| R65 | *C1 | R154 | *A1 |
| R66 | C1 | R155 | *B2 |
| R72 | *C2 | R156 | *B2 |
| R73 | *C2 | R157 | *B2 |
| R74 | C1 | R158 | *B1 |
| R75 | C1 | R159 | *B1 |
| R76 | C1 | R160 | *B1 |
| R81 | *C1 | R161 | *B1 |
| R82 | *C1 | | |
| R83 | C2 | RB1 | C2 |
| R84 | C2 | RB2 | C2 |
| R85 | *B1 | RB3 | C1 |
| R86 | *B1 | RB5 | C1 |
| R95 | *A2 | RB7 | *B2 |
| R98 | *A2 | RB8 | B1 |
| R99 | B2 | RB9 | *B1 |
| R100 | *A2 | RB10 | *A1 |
| R101 | B2 | RB11 | *A1 |
| R102 | B2 | RB12 | *A1 |
| R103 | B2 | RB13 | *A1 |
| R104 | B2 | RB14 | *A2 |
| R105 | B2 | RB15 | *A2 |
| R106 | *B2 | RB16 | *A2 |
| R107 | *B2 | RB17 | *A2 |
| R108 | *B2 | RB18 | *A1 |
| R109 | *B2 | RB19 | *A1 |
| R110 | *B2 | RB20 | A1 |
| R111 | *B2 | RB21 | A1 |
| R112 | *B2 | RB22 | A1 |
| R113 | *B2 | RB23 | A2 |
| R114 | *B2 | RB24 | A2 |
| R115 | *B2 | RB25 | A1 |
| R116 | *B2 | RB26 | A1 |
| R117 | *B2 | RB27 | A2 |
| R118 | *B1 | RB28 | A2 |
| R119 | *B2 | RB29 | A2 |
| R120 | *B1 | RB30 | A1 |
| R121 | *B2 | RB31 | A1 |
| R122 | *B1 | RB32 | A1 |
| R123 | *B2 | RB33 | A1 |
| R124 | *B1 | | |
| R125 | *B1 | S1 | *B2 |
| R126 | *B1 | | |
| R127 | *B2 | SL1 | C2 |
| R128 | *B2 | | |
| R129 | *A1 | THP1 | C1 |
| R130 | *A1 | THP2 | C1 |
| R131 | *A1 | | |
| R132 | *A1 | X1 | *A2 |
| R133 | *B1 | | |
| R134 | *B1 | *:B SIDE | |
| R135 | *B1 | | |
| R136 | *B2 | | |
| R137 | *B1 | | |

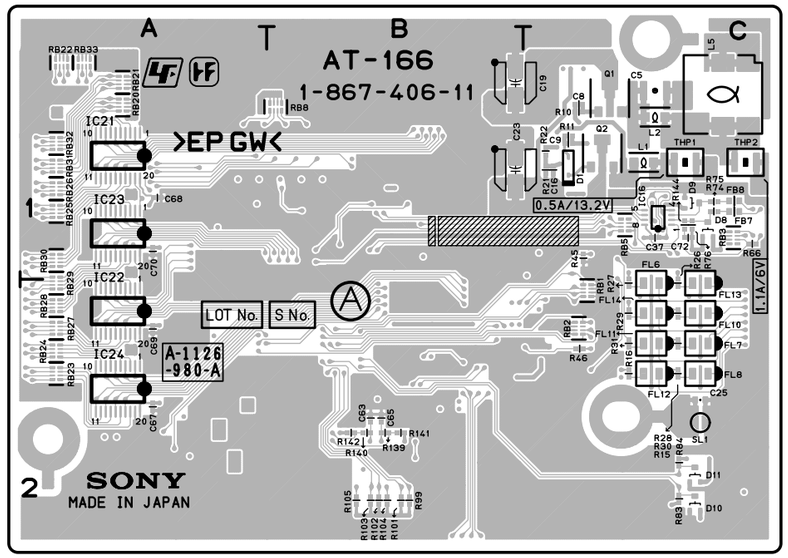AT-163 (1-865-934-13)

| | | | | | | | | | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| C1 | *B5 | C161 | *A3 | C620 | *B4 | IC110 | *B2 | IC136 | C3 | IC407 | *B3 | L105 | A3 | Q408 | B1 | R22 | *B5 | R115 | *C4 | R141 | *C4 | R168 | C3 |
| C2 | *C4 | C162 | *A3 | C621 | *B4 | IC111 | *C3 | IC137 | *A1 | IC408 | B1 | L301 | C4 | Q409 | B1 | R23 | *C5 | R116 | *C4 | R142 | *C4 | R169 | *C4 |
| C3 | *C5 | C163 | *A3 | C622 | *B4 | IC112 | *C3 | IC138 | B2 | IC409 | C1 | L401 | B2 | Q410 | B1 | R24 | *C5 | R117 | *C4 | R143 | *C4 | R170 | *C4 |
| C4 | *C5 | C164 | B2 | C623 | B4 | IC113 | B4 | IC139 | *A4 | IC410 | *C1 | L402 | *B1 | Q411 | B1 | R25 | *C5 | R118 | *B1 | R144 | *C4 | R171 | *B5 |
| C6 | *B5 | C165 | *A3 | C624 | *B4 | IC114 | *A4 | IC140 | B2 | IC601 | *B2 | L403 | B1 | Q414 | *C1 | R26 | *B5 | R119 | *C2 | R145 | *C4 | R172 | *C4 |
| C7 | C5 | C166 | *B3 | C625 | B4 | IC115 | *B3 | IC141 | *A3 | IC602 | *C4 | L601 | B3 | Q415 | C1 | R27 | *C5 | R120 | *C4 | R146 | *B3 | R173 | *C4 |
| C8 | C1 | C167 | B4 | C626 | B4 | IC116 | *A3 | IC142 | *A3 | IC603 | *B5 | L602 | *B5 | Q416 | C1 | R28 | *C1 | R121 | *C4 | R147 | *B3 | R174 | *B1 |
| C10 | *C2 | C168 | *B4 | C627 | *B4 | IC117 | *B4 | IC143 | *B3 | IC604 | B5 | L603 | *B1 | | | R29 | *B1 | R122 | *C4 | R148 | B3 | R175 | *C4 |
| C11 | *C5 | C169 | B3 | C628 | B4 | IC118 | A3 | IC144 | *C4 | IC605 | *C5 | | | R1 | *C4 | R30 | *B1 | R123 | *C2 | R149 | *C4 | R176 | *C3 |
| C12 | *C2 | C170 | *B3 | C629 | *B4 | IC119 | B2 | IC145 | *B2 | IC606 | C2 | PH301 | B3 | R2 | *C4 | R31 | *B1 | R124 | *C2 | R150 | *C4 | R177 | *C3 |
| C13 | *C1 | C171 | B2 | C630 | *B4 | IC120 | C3 | IC146 | B1 | IC607 | *B4 | | | R3 | *C4 | R32 | *B1 | R125 | *C2 | R151 | *C4 | R178 | *B4 |
| C14 | *C5 | C172 | A5 | C631 | *B4 | IC121 | *B4 | IC147 | *C2 | IC608 | *B4 | Q1 | *C2 | R4 | *C4 | R33 | *B1 | R126 | *C4 | R152 | C3 | R179 | *B4 |
| C15 | *C1 | C173 | B5 | C632 | *B4 | IC122 | A3 | IC148 | *C2 | IC609 | B4 | Q2 | C5 | R5 | *C3 | R101 | C2 | R127 | *C4 | R153 | *C4 | R180 | B4 |
| C16 | *C1 | C174 | C3 | C633 | *B4 | IC123 | C3 | IC301 | B3 | IC610 | B4 | Q3 | B5 | R6 | *C3 | R102 | *C2 | R128 | *C4 | R154 | *C4 | R181 | B4 |
| C17 | *C1 | C175 | *B3 | C634 | B4 | IC124 | *A2 | IC302 | B3 | IC611 | C3 | Q101 | *C1 | R7 | *C2 | R103 | C2 | R129 | *C2 | R155 | A3 | R182 | *B4 |
| C18 | *B5 | C176 | *B1 | C635 | *B4 | IC125 | *B2 | IC303 | *C2 | IC612 | *B1 | Q102 | *C4 | R8 | *C2 | R104 | *C1 | R130 | *C2 | R156 | *B4 | R183 | B4 |
| C19 | *B5 | C177 | *C2 | C636 | C5 | IC126 | B3 | IC304 | *C2 | | | Q103 | *C4 | R9 | *C4 | R105 | *C1 | R131 | C2 | R157 | A3 | R184 | *B4 |
| C20 | *C5 | C301 | B3 | C637 | B5 | IC127 | *B2 | IC305 | *B3 | L1 | *B5 | Q104 | B2 | R10 | *C2 | R106 | *C2 | R132 | C2 | R158 | *B2 | R185 | B4 |
| C21 | *C5 | C302 | *B2 | C638 | C4 | IC128 | *A2 | IC306 | C4 | L2 | C1 | Q105 | C4 | R11 | *C5 | R107 | *C1 | R133 | *B2 | R159 | *B2 | R186 | *B4 |
| C22 | *C5 | C303 | B2 | C639 | C2 | IC129 | B2 | IC307 | *B3 | L3 | *C2 | Q401 | C1 | R12 | *C1 | R108 | C2 | R134 | C3 | R160 | *B4 | R187 | B4 |
| C23 | *C5 | C304 | B3 | C640 | C2 | IC130 | B4 | IC308 | *C4 | L4 | C1 | Q402 | *C1 | R14 | *C5 | R109 | C2 | R135 | *B4 | R161 | *B4 | R188 | *B4 |
| C24 | *C1 | C305 | B2 | C641 | B4 | IC131 | *B3 | IC401 | *A2 | L5 | C5 | Q403 | C2 | R16 | *C1 | R110 | *C2 | R136 | *B4 | R162 | *B4 | R189 | B4 |
| C25 | C1 | C306 | B3 | C642 | B5 | IC132 | B2 | IC402 | *A2 | L101 | *A5 | Q404 | C1 | R17 | *B5 | R111 | *C2 | R137 | C3 | R163 | *B4 | R190 | B4 |
| C26 | *C1 | C307 | B3 | C643 | *B5 | IC133 | *A4 | IC403 | A2 | L102 | *A4 | Q405 | B1 | R18 | *B5 | R112 | *C4 | R138 | *C4 | R164 | *B4 | R191 | *B4 |
| C27 | *C1 | C308 | B2 | C644 | *B4 | IC134 | B2 | IC404 | A1 | L103 | *A3 | Q406 | *C1 | R19 | *C5 | R113 | *C4 | R139 | *C4 | R165 | *B4 | R192 | *B4 |
| C28 | C1 | C309 | *B3 | C645 | *C5 | IC135 | *C3 | IC406 | *B3 | L104 | C4 | Q407 | C1 | R20 | *C5 | R114 | *C4 | R140 | *C4 | R167 | C3 | R193 | B4 |
| C29 | C5 | C310 | B3 | C646 | *B2 | | | | | | | | | | | | | | | | | | |
| C30 | *B1 | C311 | *B3 | C647 | *C5 | | | | | | | | | | | | | | | | | | |
| C31 | C5 | C312 | *B3 | | | | | | | | | | | | | | | | | | | | |
| C32 | C5 | C313 | C4 | CL1 | B5 | | | | | | | | | | | | | | | | | | |
| C33 | C5 | C314 | C4 | CL2 | C5 | | | | | | | | | | | | | | | | | | |
| C34 | B1 | C315 | *C2 | CL3 | C5 | | | | | | | | | | | | | | | | | | |
| C35 | B5 | C316 | *C2 | CL4 | B1 | | | | | | | | | | | | | | | | | | |
| C36 | C5 | C317 | B3 | CL101 | A5 | | | | | | | | | | | | | | | | | | |
| C102 | *C2 | C318 | *C4 | | | | | | | | | | | | | | | | | | | | |
| C103 | B1 | C319 | B4 | CN101 | C3 | | | | | | | | | | | | | | | | | | |
| C104 | *C2 | C320 | B4 | CN102 | A5 | | | | | | | | | | | | | | | | | | |
| C105 | *C2 | C321 | *C3 | CN401 | A2 | | | | | | | | | | | | | | | | | | |
| C106 | *B2 | C401 | *A2 | | | | | | | | | | | | | | | | | | | | |
| C107 | *C2 | C402 | *A2 | D1 | *C2 | | | | | | | | | | | | | | | | | | |
| C108 | *B3 | C403 | *A2 | D2 | *C5 | | | | | | | | | | | | | | | | | | |
| C109 | *B3 | C404 | *A2 | D3 | *C5 | | | | | | | | | | | | | | | | | | |
| C110 | *B4 | C406 | A2 | D102 | C2 | | | | | | | | | | | | | | | | | | |
| C111 | B2 | C407 | *B3 | D103 | C2 | | | | | | | | | | | | | | | | | | |
| C112 | *C4 | C408 | *B2 | D104 | *B4 | | | | | | | | | | | | | | | | | | |
| C113 | *B4 | C409 | B2 | D105 | *C2 | | | | | | | | | | | | | | | | | | |
| C114 | *C4 | C410 | *A2 | D401 | *B3 | | | | | | | | | | | | | | | | | | |
| C115 | *C3 | C411 | A2 | D402 | *B3 | | | | | | | | | | | | | | | | | | |
| C116 | B3 | C412 | C2 | D403 | *B3 | | | | | | | | | | | | | | | | | | |
| C117 | *C1 | C413 | C2 | D404 | *B3 | | | | | | | | | | | | | | | | | | |
| C119 | *A5 | C414 | *A2 | D601 | B4 | | | | | | | | | | | | | | | | | | |
| C120 | A4 | C415 | *B1 | D602 | B4 | | | | | | | | | | | | | | | | | | |
| C121 | *B2 | C416 | *B2 | D603 | B4 | | | | | | | | | | | | | | | | | | |
| C122 | A3 | C417 | *B1 | D604 | B4 | | | | | | | | | | | | | | | | | | |
| C123 | *C3 | C418 | *B1 | D605 | B5 | | | | | | | | | | | | | | | | | | |
| C124 | *B2 | C419 | *B1 | D606 | B5 | | | | | | | | | | | | | | | | | | |
| C125 | *C4 | C420 | *B1 | D607 | *B5 | | | | | | | | | | | | | | | | | | |
| C126 | *C4 | C421 | *B1 | D608 | *B5 | | | | | | | | | | | | | | | | | | |
| C127 | *A3 | C422 | *A1 | | | | | | | | | | | | | | | | | | | | |
| C128 | A4 | C423 | *A1 | E1 | B4 | | | | | | | | | | | | | | | | | | |
| C129 | A5 | C425 | *A1 | | | | | | | | | | | | | | | | | | | | |
| C130 | A5 | C426 | *A1 | FB1 | C1 | | | | | | | | | | | | | | | | | | |
| C131 | B4 | C427 | B1 | FB2 | C1 | | | | | | | | | | | | | | | | | | |
| C132 | *C3 | C428 | *A1 | FB101 | C2 | | | | | | | | | | | | | | | | | | |
| C133 | *B4 | C429 | *A1 | FB102 | C2 | | | | | | | | | | | | | | | | | | |
| C134 | B4 | C430 | *A1 | FB103 | C2 | | | | | | | | | | | | | | | | | | |
| C135 | *B4 | C431 | *A1 | FB104 | C2 | | | | | | | | | | | | | | | | | | |
| C136 | A4 | C432 | *A1 | FB105 | C2 | | | | | | | | | | | | | | | | | | |
| C137 | A3 | C433 | *A1 | FB106 | C2 | | | | | | | | | | | | | | | | | | |
| C138 | B4 | C434 | *A1 | FB301 | C4 | | | | | | | | | | | | | | | | | | |
| C139 | B4 | C435 | B1 | FB302 | C4 | | | | | | | | | | | | | | | | | | |
| C140 | *A3 | C436 | *C1 | FB401 | *C3 | | | | | | | | | | | | | | | | | | |
| C141 | *B4 | C437 | C1 | FB402 | *C3 | | | | | | | | | | | | | | | | | | |
| C142 | *B4 | C601 | *B1 | FB403 | *C3 | | | | | | | | | | | | | | | | | | |
| C143 | *B4 | C602 | *B1 | FB404 | *C3 | | | | | | | | | | | | | | | | | | |
| C144 | *B4 | C603 | B3 | FB405 | *C3 | | | | | | | | | | | | | | | | | | |
| C145 | B3 | C604 | B3 | FB406 | *C3 | | | | | | | | | | | | | | | | | | |
| C146 | B3 | C605 | C3 | FB407 | *C3 | | | | | | | | | | | | | | | | | | |
| C147 | B3 | C606 | C2 | | | | | | | | | | | | | | | | | | | | |
| C148 | B2 | C607 | C3 | HB001 | *A5 | | | | | | | | | | | | | | | | | | |
| C149 | *A2 | C608 | *C2 | | | | | | | | | | | | | | | | | | | | |
| C150 | *A1 | C609 | *C2 | IC1 | *C1 | | | | | | | | | | | | | | | | | | |
| C151 | *B2 | C610 | *C2 | IC2 | *B5 | | | | | | | | | | | | | | | | | | |
| C152 | *A2 | C611 | *C2 | IC3 | *C5 | | | | | | | | | | | | | | | | | | |
| C153 | *A2 | C612 | *C2 | IC101 | *C2 | | | | | | | | | | | | | | | | | | |
| C154 | *B2 | C613 | *B4 | IC103 | *C2 | | | | | | | | | | | | | | | | | | |
| C155 | *A2 | C614 | *C4 | IC104 | *C2 | | | | | | | | | | | | | | | | | | |
| C156 | *A5 | C615 | *C2 | IC105 | *C1 | | | | | | | | | | | | | | | | | | |
| C157 | *A4 | C616 | *B5 | IC106 | *B3 | | | | | | | | | | | | | | | | | | |
| C158 | B2 | C617 | *C4 | IC107 | *B3 | | | | | | | | | | | | | | | | | | |
| C159 | *A4 | C618 | B4 | IC108 | *B2 | | | | | | | | | | | | | | | | | | |
| C160 | B2 | C619 | B4 | IC109 | A4 | | | | | | | | | | | | | | | | | | |

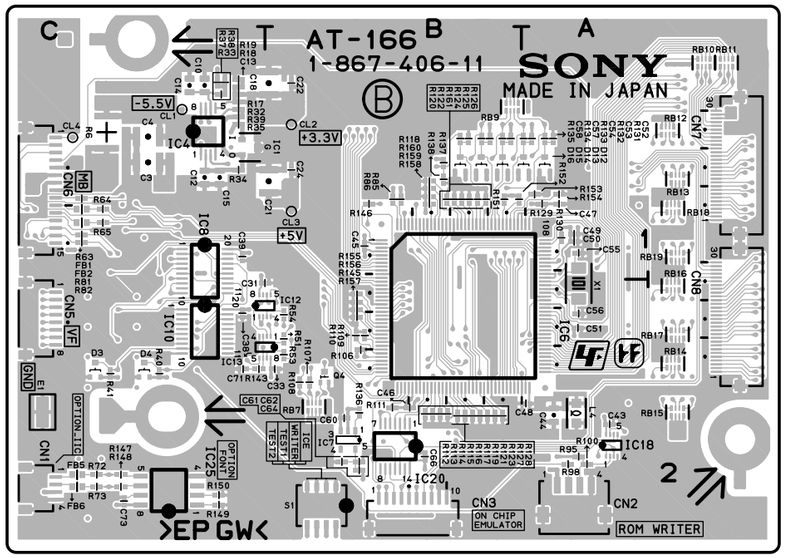


**AT-163** -A SIDE-
SUFFIX: -13




**AT-163** -B SIDE-
SUFFIX: -13

| | | | | | | | | | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| R409 | C1 | R639 | B4 | IC143 | *B3 | | | | | | | | | | | | | | | | | | |
| R410 | A1 | R640 | *B4 | IC401 | *A2 | | | | | | | | | | | | | | | | | | |
| R411 | *A1 | R641 | *B4 | IC402 | *A2 | | | | | | | | | | | | | | | | | | |
| R412 | A2 | R642 | C5 | IC403 | A2 | | | | | | | | | | | | | | | | | | |
| R413 | A2 | R643 | C5 | IC404 | A1 | | | | | | | | | | | | | | | | | | |
| R414 | A1 | R644 | C4 | IC405 | *B3 | | | | | | | | | | | | | | | | | | |
| R415 | *A1 | R645 | C4 | IC406 | *B3 | | | | | | | | | | | | | | | | | | |
| R416 | C1 | R646 | *B4 | IC407 | *B3 | | | | | | | | | | | | | | | | | | |
| R417 | A2 | R647 | C5 | IC408 | B1 | | | | | | | | | | | | | | | | | | |
| R418 | A1 | R648 | *B4 | IC409 | C1 | | | | | | | | | | | | | | | | | | |
| R419 | *A1 | R649 | C2 | IC410 | *C1 | | | | | | | | | | | | | | | | | | |
| R420 | C1 | R650 | B4 | IC601 | *B2 | | | | | | | | | | | | | | | | | | |
| R421 | *C1 | R651 | C2 | IC602 | *C4 | | | | | | | | | | | | | | | | | | |
| R422 | *B3 | R652 | C2 | IC603 | *B5 | | | | | | | | | | | | | | | | | | |
| R423 | *B3 | R653 | C2 | IC604 | B5 | | | | | | | | | | | | | | | | | | |
| R424 | *C2 | R654 | B4 | IC605 | *C5 | | | | | | | | | | | | | | | | | | |
| R425 | A1 | R655 | B4 | IC606 | C2 | | | | | | | | | | | | | | | | | | |
| R426 | *A1 | R656 | B5 | IC607 | *B4 | | | | | | | | | | | | | | | | | | |
| R428 | *B3 | R657 | B4 | IC608 | *B4 | | | | | | | | | | | | | | | | | | |
| R429 | *B3 | R658 | B5 | IC609 | B4 | | | | | | | | | | | | | | | | | | |
| R430 | *A2 | R659 | B5 | IC610 | B4 | | | | | | | | | | | | | | | | | | |
| R431 | C2 | R660 | *B5 | IC611 | C3 | | | | | | | | | | | | | | | | | | |
| R432 | C2 | R661 | *B5 | IC612 | *B1 | | | | | | | | | | | | | | | | | | |
| R433 | C2 | R662 | *B1 | | | | | | | | | | | | | | | | | | | | |
| R434 | C2 | R663 | *B1 | | | | | | | | | | | | | | | | | | | | |
| R435 | B1 | R664 | *B1 | | | | | | | | | | | | | | | | | | | | |
| R437 | C1 | R665 | *B4 | | | | | | | | | | | | | | | | | | | | |
| R438 | C2 | R666 | *C4 | | | | | | | | | | | | | | | | | | | | |
| R439 | C3 | R667 | *C5 | | | | | | | | | | | | | | | | | | | | |
| R442 | *A2 | R668 | *C5 | | | | | | | | | | | | | | | | | | | | |
| R443 | *A2 | R669 | *C5 | | | | | | | | | | | | | | | | | | | | |
| R448 | B1 | R670 | *C4 | | | | | | | | | | | | | | | | | | | | |
| R450 | B1 | R671 | B5 | | | | | | | | | | | | | | | | | | | | |
| R451 | *C3 | R672 | B5 | | | | | | | | | | | | | | | | | | | | |
| R452 | C3 | | | | | | | | | | | | | | | | | | | | | | |
| R461 | *A1 | RB103 | *A5 | | | | | | | | | | | | | | | | | | | | |
| R462 | *A1 | RB104 | *B2 | | | | | | | | | | | | | | | | | | | | |
| R468 | C2 | RB105 | *C3 | | | | | | | | | | | | | | | | | | | | |
| R469 | C3 | RB106 | *C3 | | | | | | | | | | | | | | | | | | | | |
| R479 | B1 | RB107 | *C3 | | | | | | | | | | | | | | | | | | | | |
| R483 | *B2 | RB108 | *C3 | | | | | | | | | | | | | | | | | | | | |
| R485 | C3 | RB109 | C3 | | | | | | | | | | | | | | | | | | | | |
| R486 | *C1 | RB110 | C3 | | | | | | | | | | | | | | | | | | | | |
| R487 | *C1 | RB111 | *A4 | | | | | | | | | | | | | | | | | | | | |
| R497 | *B2 | RB112 | *A4 | | | | | | | | | | | | | | | | | | | | |
| R498 | *A1 | RB113 | *A4 | | | | | | | | | | | | | | | | | | | | |
| R509 | C2 | RB114 | *A4 | | | | | | | | | | | | | | | | | | | | |
| R518 | C1 | RB115 | *B4 | | | | | | | | | | | | | | | | | | | | |
| R520 | B1 | RB116 | *B4 | | | | | | | | | | | | | | | | | | | | |
| R532 | C1 | RB117 | *B4 | | | | | | | | | | | | | | | | | | | | |
| R533 | *B3 | RB118 | *B4 | | | | | | | | | | | | | | | | | | | | |
| R534 | *B3 | RB119 | *B2 | | | | | | | | | | | | | | | | | | | | |
| R535 | *C1 | RB120 | *A4 | | | | | | | | | | | | | | | | | | | | |
| R536 | C1 | RB121 | *A4 | | | | | | | | | | | | | | | | | | | | |
| R601 | *B4 | RB122 | *A4 | | | | | | | | | | | | | | | | | | | | |
| R602 | C2 | RB123 | *A4 | | | | | | | | | | | | | | | | | | | | |
| R603 | C3 | RB124 | *A4 | | | | | | | | | | | | | | | | | | | | |
| R604 | C3 | RB125 | *B4 | | | | | | | | | | | | | | | | | | | | |
| R605 | C3 | RB401 | B2 | | | | | | | | | | | | | | | | | | | | |
| R606 | C2 | RB402 | *C2 | | | | | | | | | | | | | | | | | | | | |
| R607 | C3 | RB403 | *C2 | | | | | | | | | | | | | | | | | | | | |
| R608 | *B1 | RB404 | *C3 | | | | | | | | | | | | | | | | | | | | |
| R609 | *B1 | RB405 | *C3 | | | | | | | | | | | | | | | | | | | | |
| R610 | C2 | RB406 | C3 | | | | | | | | | | | | | | | | | | | | |
| R611 | C3 | RB407 | C1 | | | | | | | | | | | | | | | | | | | | |
| R612 | B4 | RB408 | C1 | | | | | | | | | | | | | | | | | | | | |
| R613 | *B4 | RB409 | C2 | | | | | | | | | | | | | | | | | | | | |
| R614 | *B4 | RB410 | *B2 | | | | | | | | | | | | | | | | | | | | |
| R615 | *B4 | RB411 | *A1 | | | | | | | | | | | | | | | | | | | | |
| R616 | B4 | RB412 | *B1 | | | | | | | | | | | | | | | | | | | | |
| R617 | *B4 | RB413 | *A1 | | | | | | | | | | | | | | | | | | | | |
| R618 | B4 | RB414 | *B1 | | | | | | | | | | | | | | | | | | | | |
| R619 | B4 | RB415 | *B1 | | | | | | | | | | | | | | | | | | | | |
| R620 | *B4 | RB416 | *B1 | | | | | | | | | | | | | | | | | | | | |
| R621 | *B4 | RB417 | *A1 | | | | | | | | | | | | | | | | | | | | |
| R622 | *B4 | RB601 | B1 | | | | | | | | | | | | | | | | | | | | |
| R623 | *B4 | RB602 | B1 | | | | | | | | | | | | | | | | | | | | |
| R624 | *B4 | RB603 | C2 | | | | | | | | | | | | | | | | | | | | |
| R625 | B4 | RB604 | *B1 | | | | | | | | | | | | | | | | | | | | |
| R626 | *B4 | | | | | | | | | | | | | | | | | | | | | | |
| R627 | B4 | S1 | B2 | | | | | | | | | | | | | | | | | | | | |
| R628 | *B4 | | | | | | | | | | | | | | | | | | | | | | |
| R629 | B4 | THP1 | *B5 | | | | | | | | | | | | | | | | | | | | |
| R630 | *B4 | THP2 | *C1 | | | | | | | | | | | | | | | | | | | | |
| R631 | *B4 | THP3 | *C5 | | | | | | | | | | | | | | | | | | | | |
| R632 | *B4 | THP101 | C4 | | | | | | | | | | | | | | | | | | | | |
| R633 | *B4 | | | | | | | | | | | | | | | | | | | | | | |
| R634 | *B4 | X101 | B4 | | | | | | | | | | | | | | | | | | | | |
| R635 | B4 | X301 | *B3 | | | | | | | | | | | | | | | | | | | | |
| R636 | *B4 | | | | | | | | | | | | | | | | | | | | | | |
| R637 | *B4 | *:B SIDE | | | | | | | | | | | | | | | | | | | | | |
| R638 | B4 | | | | | | | | | | | | | | | | | | | | | | |

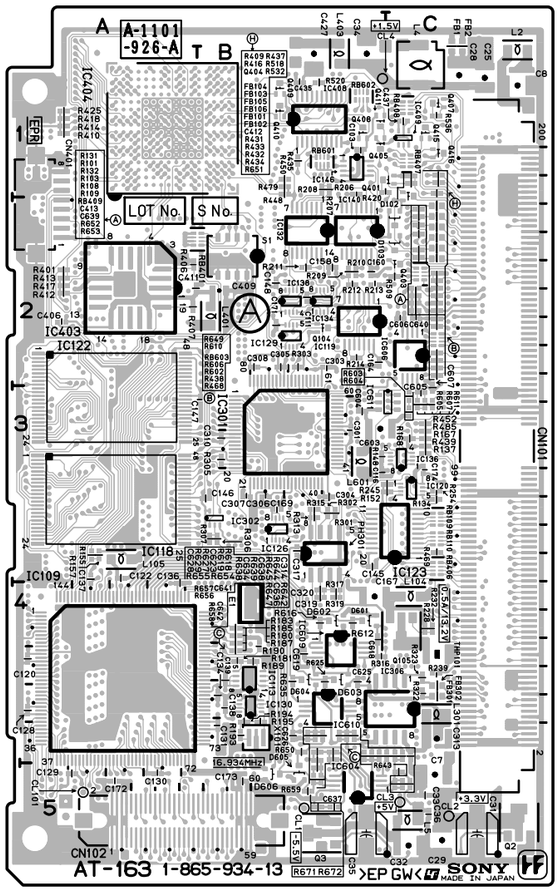AT-166 (1-867-406-21,31)

| | | | |
|---|---|---|---|
| C3 | *C1 | D8 | C1 |
| C4 | *C1 | D9 | C1 |
| C5 | C1 | D10 | C2 |
| C8 | C1 | D11 | C2 |
| C9 | C1 | D12 | *A1 |
| C10 | *C1 | D13 | *A1 |
| C12 | *C1 | D14 | *B1 |
| C13 | *C1 | D15 | *B1 |
| C14 | *C1 | D16 | *B1 |
| C15 | *C1 | | |
| C16 | C1 | E1 | *C2 |
| C18 | *B1 | | |
| C19 | B1 | FB1 | *C1 |
| C21 | *B1 | FB2 | *C1 |
| C22 | *B1 | FB5 | *C2 |
| C23 | B1 | FB6 | *C2 |
| C24 | *B1 | FB7 | C1 |
| C25 | C2 | FB8 | C1 |
| C31 | *C2 | | |
| C33 | *B2 | FL6 | C2 |
| C37 | C1 | FL7 | C2 |
| C38 | *C2 | FL8 | C2 |
| C39 | *C1 | FL10 | C2 |
| C43 | *A2 | FL11 | C2 |
| C44 | *A2 | FL12 | C2 |
| C45 | *B1 | FL13 | C2 |
| C46 | *B2 | FL14 | C2 |
| C47 | *A1 | | |
| C48 | *A2 | IC1 | *C1 |
| C49 | *A1 | IC4 | *C1 |
| C50 | *A1 | IC6 | *B2 |
| C51 | *A2 | IC7 | *B2 |
| C52 | *A1 | IC8 | *C1 |
| C53 | *A1 | IC10 | *C2 |
| C54 | *B1 | IC12 | *B2 |
| C55 | *A1 | IC13 | *C2 |
| C56 | *A2 | IC16 | C1 |
| C57 | *B1 | IC18 | *A2 |
| C58 | *B1 | IC20 | *B2 |
| C60 | *B2 | IC21 | A1 |
| C61 | *B2 | IC22 | A2 |
| C62 | *B2 | IC23 | A1 |
| C63 | B2 | IC24 | A2 |
| C64 | *B2 | IC25 | *C2 |
| C65 | B2 | | |
| C66 | *B2 | L1 | C1 |
| C67 | A2 | L2 | C1 |
| C68 | A1 | L4 | *A2 |
| C69 | A2 | L5 | C1 |
| C70 | A1 | | |
| C71 | *C2 | Q1 | C1 |
| C72 | C1 | Q2 | C1 |
| C73 | *C2 | Q4 | *B2 |
| | | | |
| CL1 | *C1 | R6 | *C1 |
| CL2 | *B1 | R10 | C1 |
| CL3 | *B1 | R11 | C1 |
| CL4 | *C1 | R15 | C2 |
| | | R16 | C2 |
| CN1 | *C2 | R17 | *C1 |
| CN2 | *A2 | R18 | *C1 |
| CN3 | *B2 | R19 | *C1 |
| CN5 | *C2 | R21 | C1 |
| CN6 | *C1 | R22 | C1 |
| CN7 | *A1 | R26 | C2 |
| CN8 | *A2 | R27 | C2 |
| | | R28 | C2 |
| D1 | C1 | R29 | C2 |
| D3 | *C2 | R30 | C2 |
| D4 | *C2 | R31 | C2 |

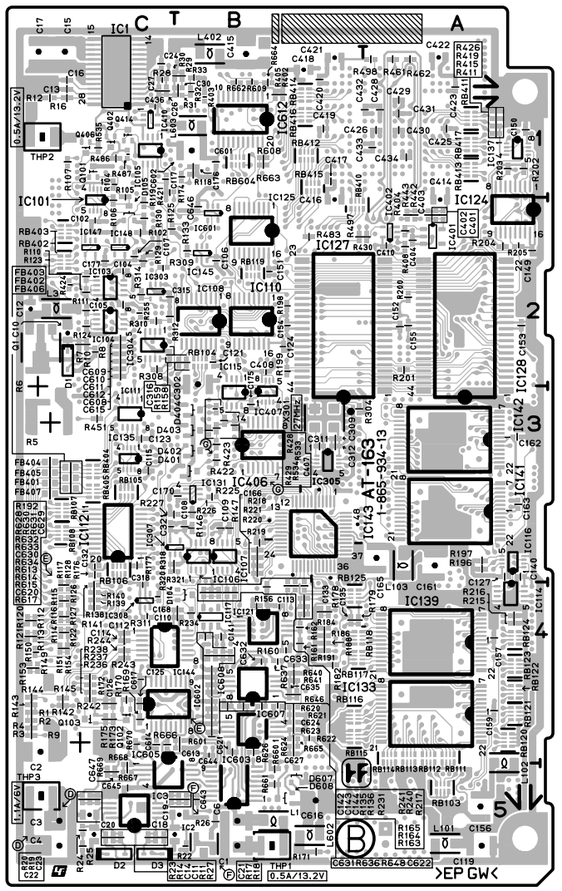


**AT-166** -A SIDE-
SUFFIX: -21, 31




**AT-166** -B SIDE-
SUFFIX: -21, 31

| | | | |
|---|---|---|---|
| R32 | *C1 | R138 | *B1 |
| R33 | *C1 | R139 | B2 |
| R34 | *C1 | R140 | B2 |
| R35 | *C1 | R141 | B2 |
| R37 | *C1 | R142 | B2 |
| R38 | *C1 | R143 | *C2 |
| R39 | *C1 | R144 | C1 |
| R40 | *C2 | R145 | *B2 |
| R41 | *C2 | R146 | *B1 |
| R45 | C1 | R147 | *C2 |
| R46 | C2 | R148 | *C2 |
| R51 | *B2 | R149 | *C2 |
| R53 | *B2 | R150 | *C2 |
| R54 | *B2 | R151 | *B1 |
| R63 | *C1 | R152 | *B1 |
| R64 | *C1 | R153 | *A1 |
| R65 | *C1 | R154 | *A1 |
| R66 | C1 | R155 | *B2 |
| R72 | *C2 | R156 | *B2 |
| R73 | *C2 | R157 | *B2 |
| R74 | C1 | R158 | *B1 |
| R75 | C1 | R159 | *B1 |
| R76 | C1 | R160 | *B1 |
| R81 | *C1 | R161 | *B1 |
| R82 | *C1 | R162 | *B2 |
| R83 | C2 | R163 | *B2 |
| R84 | C2 | | |
| R85 | *B1 | RB1 | C2 |
| R86 | *B1 | RB2 | C2 |
| R95 | *A2 | RB3 | C1 |
| R98 | *A2 | RB5 | C1 |
| R99 | B2 | RB7 | *B2 |
| R100 | *A2 | RB8 | B1 |
| R101 | B2 | RB9 | *B1 |
| R102 | B2 | RB10 | *A1 |
| R103 | B2 | RB11 | *A1 |
| R104 | B2 | RB12 | *A1 |
| R105 | B2 | RB13 | *A1 |
| R106 | *B2 | RB14 | *A2 |
| R107 | *B2 | RB15 | *A2 |
| R108 | *B2 | RB16 | *A2 |
| R109 | *B2 | RB17 | *A2 |
| R110 | *B2 | RB18 | *A1 |
| R111 | *B2 | RB19 | *A1 |
| R112 | *B2 | RB20 | A1 |
| R113 | *B2 | RB21 | A1 |
| R114 | *B2 | RB22 | A1 |
| R115 | *B2 | RB23 | A2 |
| R116 | *B2 | RB24 | A2 |
| R117 | *B2 | RB25 | A1 |
| R118 | *B1 | RB26 | A1 |
| R119 | *B2 | RB27 | A2 |
| R120 | *B1 | RB28 | A2 |
| R121 | *B2 | RB29 | A2 |
| R122 | *B1 | RB30 | A1 |
| R123 | *B2 | RB31 | A1 |
| R124 | *B1 | RB32 | A1 |
| R125 | *B1 | RB33 | A1 |
| R126 | *B1 | | |
| R127 | *B2 | S1 | *B2 |
| R128 | *B2 | | |
| R129 | *A1 | SL1 | C2 |
| R130 | *A1 | | |
| R131 | *A1 | THP1 | C1 |
| R132 | *A1 | THP2 | C1 |
| R133 | *B1 | | |
| R134 | *B1 | X1 | *A2 |
| R135 | *B1 | | |
| R136 | *B2 | *:B SIDE | |
| R137 | *B1 | | |

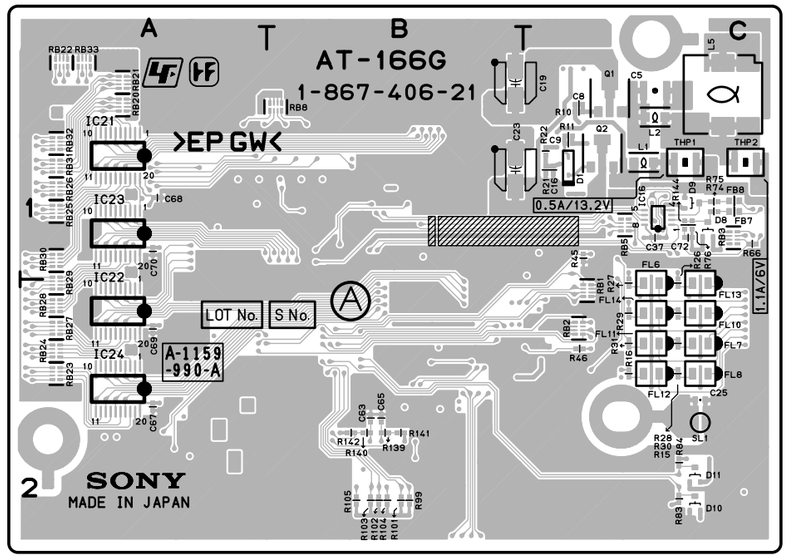AU-298 (1-865-933-12)

| | | | | | | | | | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| C1 | A3 | C254 | B3 | C438 | C2 | | | | | | | | | | | | | | | | | | |
| C2 | A3 | C255 | *B3 | C439 | D1 | | | | | | | | | | | | | | | | | | |
| C3 | B3 | C256 | C2 | C440 | D1 | | | | | | | | | | | | | | | | | | |
| C4 | B3 | C257 | B2 | C441 | D1 | | | | | | | | | | | | | | | | | | |
| C5 | *A3 | C258 | *C3 | C442 | C1 | | | | | | | | | | | | | | | | | | |
| C6 | *A3 | C259 | *C3 | C443 | *D2 | | | | | | | | | | | | | | | | | | |
| C7 | A3 | C301 | B3 | C444 | *C2 | | | | | | | | | | | | | | | | | | |
| C8 | A3 | C302 | A3 | C445 | D1 | | | | | | | | | | | | | | | | | | |
| C9 | *A2 | C303 | A3 | C446 | C1 | | | | | | | | | | | | | | | | | | |
| C10 | B2 | C304 | A2 | C447 | *D1 | | | | | | | | | | | | | | | | | | |
| C11 | B2 | C305 | B3 | C448 | *D1 | | | | | | | | | | | | | | | | | | |
| C12 | *A2 | C306 | *A2 | C449 | *D2 | | | | | | | | | | | | | | | | | | |
| C13 | *B2 | C307 | *A2 | C450 | *D2 | | | | | | | | | | | | | | | | | | |
| C14 | *B2 | C308 | *B2 | | | | | | | | | | | | | | | | | | | | |
| C15 | *B2 | C309 | A2 | CL1 | B2 | | | | | | | | | | | | | | | | | | |
| C16 | *A2 | C310 | *B2 | CL2 | B2 | | | | | | | | | | | | | | | | | | |
| C17 | *A2 | C311 | *A2 | CL3 | B2 | | | | | | | | | | | | | | | | | | |
| C18 | *A2 | C312 | *A3 | CL4 | B2 | | | | | | | | | | | | | | | | | | |
| C19 | *B2 | C313 | A2 | CL6 | A2 | | | | | | | | | | | | | | | | | | |
| C20 | *B2 | C314 | A2 | CL7 | A2 | | | | | | | | | | | | | | | | | | |
| C21 | *A2 | C315 | *A2 | CL8 | B2 | | | | | | | | | | | | | | | | | | |
| C22 | B2 | C316 | *A3 | CL9 | B2 | | | | | | | | | | | | | | | | | | |
| C23 | B2 | C317 | B2 | | | | | | | | | | | | | | | | | | | | |
| C24 | A2 | C318 | *A1 | CN1 | C3 | | | | | | | | | | | | | | | | | | |
| C25 | A2 | C319 | *A1 | | | | | | | | | | | | | | | | | | | | |
| C26 | *C3 | C320 | A2 | D1 | *A3 | | | | | | | | | | | | | | | | | | |
| C28 | *B2 | C321 | A3 | D2 | *A3 | | | | | | | | | | | | | | | | | | |
| C29 | *B2 | C322 | *B2 | D3 | B2 | | | | | | | | | | | | | | | | | | |
| C30 | A1 | C323 | A2 | D4 | B2 | | | | | | | | | | | | | | | | | | |
| C31 | *B2 | C324 | A3 | D5 | *A3 | | | | | | | | | | | | | | | | | | |
| C32 | A1 | C325 | A1 | D6 | *A3 | | | | | | | | | | | | | | | | | | |
| C33 | *B2 | C326 | A1 | D7 | B2 | | | | | | | | | | | | | | | | | | |
| C34 | *B2 | C327 | A1 | D8 | B2 | | | | | | | | | | | | | | | | | | |
| C35 | B1 | C328 | A1 | D9 | B2 | | | | | | | | | | | | | | | | | | |
| C36 | B2 | C329 | *A1 | D10 | B2 | | | | | | | | | | | | | | | | | | |
| C37 | *B1 | C330 | *A1 | D11 | *B1 | | | | | | | | | | | | | | | | | | |
| C38 | *C1 | C331 | A2 | D12 | *B1 | | | | | | | | | | | | | | | | | | |
| C39 | *C1 | C332 | *A1 | D201 | *C2 | | | | | | | | | | | | | | | | | | |
| C40 | B1 | C333 | *A1 | D202 | *C2 | | | | | | | | | | | | | | | | | | |
| C41 | C1 | C334 | A2 | D203 | *C2 | | | | | | | | | | | | | | | | | | |
| C42 | C1 | C335 | A2 | D204 | *C2 | | | | | | | | | | | | | | | | | | |
| C45 | *B2 | C336 | A2 | D205 | *B1 | | | | | | | | | | | | | | | | | | |
| C46 | A1 | C337 | A2 | D206 | *B1 | | | | | | | | | | | | | | | | | | |
| C201 | B2 | C338 | A1 | D207 | *C2 | | | | | | | | | | | | | | | | | | |
| C202 | *B1 | C340 | A2 | D301 | *B2 | | | | | | | | | | | | | | | | | | |
| C203 | C3 | C342 | *A1 | D302 | *B2 | | | | | | | | | | | | | | | | | | |
| C204 | C3 | C343 | A3 | D303 | *A2 | | | | | | | | | | | | | | | | | | |
| C205 | *B1 | C344 | A3 | D304 | *A2 | | | | | | | | | | | | | | | | | | |
| C206 | *B2 | C345 | A3 | D401 | D1 | | | | | | | | | | | | | | | | | | |
| C207 | C2 | C346 | A3 | D402 | C1 | | | | | | | | | | | | | | | | | | |
| C208 | C2 | C347 | *A1 | D403 | *D2 | | | | | | | | | | | | | | | | | | |
| C209 | C3 | C349 | *A2 | D404 | *D2 | | | | | | | | | | | | | | | | | | |
| C210 | C3 | C350 | *A3 | D405 | *D2 | | | | | | | | | | | | | | | | | | |
| C211 | *C2 | C351 | *A3 | D406 | *C2 | | | | | | | | | | | | | | | | | | |
| C212 | *C2 | C352 | *A3 | D407 | *D1 | | | | | | | | | | | | | | | | | | |
| C213 | *B2 | C401 | *D1 | D408 | D1 | | | | | | | | | | | | | | | | | | |
| C214 | *C2 | C402 | *D1 | D409 | D1 | | | | | | | | | | | | | | | | | | |
| C215 | C2 | C403 | *D3 | D410 | C1 | | | | | | | | | | | | | | | | | | |
| C216 | *C2 | C404 | *D3 | D411 | C1 | | | | | | | | | | | | | | | | | | |
| C217 | *B2 | C405 | *D3 | D412 | *D2 | | | | | | | | | | | | | | | | | | |
| C218 | *C2 | C406 | *C3 | D413 | *C2 | | | | | | | | | | | | | | | | | | |
| C219 | C2 | C407 | *D3 | D414 | *D2 | | | | | | | | | | | | | | | | | | |
| C220 | C2 | C408 | *D3 | D415 | *C2 | | | | | | | | | | | | | | | | | | |
| C221 | C2 | C409 | *C3 | D416 | *D2 | | | | | | | | | | | | | | | | | | |
| C222 | *C2 | C410 | *C3 | D417 | *D2 | | | | | | | | | | | | | | | | | | |
| C223 | B2 | C411 | D2 | D418 | *D2 | | | | | | | | | | | | | | | | | | |
| C224 | B2 | C412 | D2 | D419 | *D2 | IC203 | C1 | JC7 | *B1 | JC203 | *B2 | Q201 | *C3 | Q308 | B2 | Q417 | *D3 | Q443 | *C2 | R22 | *A2 | R48 | C1 | R74 | *B1 | R201 | B2 | R227 | *C2 |
| C225 | C2 | C413 | D2 | D420 | *D2 | IC204 | B1 | JC8 | *B1 | JC301 | *A2 | Q202 | *C3 | Q309 | *B2 | Q418 | *D3 | Q444 | D1 | R23 | *A2 | R49 | C1 | R75 | *B1 | R202 | B2 | R228 | *C2 |
| C227 | C3 | C414 | C2 | D421 | *D2 | IC205 | *B2 | JC9 | *B1 | JC302 | A2 | Q203 | *C3 | Q310 | *B2 | Q419 | *C3 | Q445 | D1 | R24 | B2 | R50 | C1 | R76 | *B1 | R203 | *C3 | R229 | *C2 |
| C228 | B3 | C415 | D3 | D422 | *D2 | IC206 | B2 | JC10 | *B1 | JC303 | *A1 | Q204 | *C3 | Q311 | *A2 | Q420 | *C1 | Q446 | C1 | R25 | B2 | R51 | C1 | R77 | *B1 | R204 | *C3 | R230 | *C2 |
| C229 | C2 | C416 | D3 | D423 | *D2 | IC207 | *C2 | JC11 | *B1 | | | Q205 | *C3 | Q312 | *A2 | Q421 | *C1 | Q447 | C1 | R26 | *A2 | R52 | C1 | R78 | A1 | R205 | *C3 | R231 | *C2 |
| C230 | B2 | C417 | D3 | D424 | *C2 | IC208 | *C2 | JC12 | *B1 | L1 | *B3 | Q206 | C2 | Q313 | B2 | Q422 | C1 | Q448 | C2 | R27 | *A2 | R53 | C1 | R79 | B1 | R206 | *C3 | R232 | *C2 |
| C231 | C3 | C418 | C3 | D425 | *C2 | IC209 | *B2 | JC13 | *B1 | L2 | *B3 | Q207 | *C2 | Q314 | *A2 | Q423 | C1 | | | R28 | A1 | R54 | B1 | R80 | B1 | R207 | B2 | R233 | *C2 |
| C232 | B3 | C419 | D3 | D426 | *D2 | IC301 | B2 | JC14 | *B1 | L3 | A3 | Q208 | C2 | Q315 | *B2 | Q424 | D2 | R1 | *B3 | R29 | B1 | R55 | B1 | R81 | B1 | R208 | *C3 | R234 | *C2 |
| C233 | C3 | C420 | D3 | D427 | *D2 | IC302 | *A1 | JC15 | *B1 | L4 | A3 | Q209 | *C2 | Q316 | *A2 | Q425 | C2 | R4 | B2 | R30 | *B2 | R56 | C1 | R82 | B1 | R209 | *C3 | R235 | *C2 |
| C234 | *C3 | C421 | C3 | | | IC303 | B1 | JC16 | *B1 | L5 | A3 | Q210 | *C2 | Q317 | *A2 | Q426 | D2 | R5 | B2 | R31 | *B2 | R57 | C1 | R83 | B1 | R210 | *C3 | R236 | *C2 |
| C235 | C3 | C422 | C3 | E1 | C1 | IC304 | *A2 | JC17 | *B1 | L6 | *B2 | Q211 | *C2 | Q401 | *C1 | Q427 | D2 | R6 | B2 | R32 | *B2 | R58 | B1 | R84 | *B1 | R211 | *C3 | R237 | *C2 |
| C236 | *C3 | C423 | *D3 | | | IC305 | *A1 | JC18 | *C1 | L7 | *B1 | Q212 | *C2 | Q402 | D1 | Q428 | *D2 | R7 | B2 | R33 | B2 | R59 | *B1 | R85 | *B1 | R212 | C3 | R238 | C2 |
| C237 | C1 | C424 | *C3 | IC3 | B2 | IC306 | *A3 | JC19 | *C1 | L8 | *B1 | Q213 | C2 | Q403 | *D1 | Q429 | *D2 | R8 | B2 | R34 | B1 | R60 | *B1 | R86 | *B1 | R213 | C3 | R239 | C2 |
| C238 | B1 | C425 | *D2 | IC4 | B2 | IC307 | *A1 | JC20 | *C1 | L9 | *C1 | Q214 | *C2 | Q404 | *D1 | Q430 | *D2 | R9 | B2 | R35 | B1 | R61 | *B1 | R87 | *B1 | R214 | *B2 | R240 | C2 |
| C239 | C1 | C426 | *D2 | IC5 | *A2 | IC308 | *A2 | JC21 | *C1 | L10 | *C3 | Q215 | *C2 | Q405 | *D2 | Q431 | *D2 | R10 | B2 | R36 | *B2 | R62 | *B1 | R88 | B1 | R215 | C3 | R241 | *C2 |
| C240 | C1 | C427 | *D2 | IC11 | B1 | IC401 | D2 | JC22 | *C1 | L201 | B1 | Q216 | *C2 | Q406 | *D2 | Q432 | *D2 | R11 | B2 | R37 | *B2 | R63 | B1 | R89 | B2 | R216 | C3 | R242 | C2 |
| C241 | *C1 | C428 | *D2 | IC12 | B1 | IC402 | *D1 | JC23 | *C1 | L202 | C1 | Q217 | *C2 | Q407 | *C2 | Q433 | *C2 | R12 | B2 | R38 | B1 | R64 | *B1 | R90 | B2 | R217 | C2 | R243 | C2 |
| C242 | *C1 | C429 | *D2 | IC13 | C1 | IC411 | C2 | JC24 | *C1 | | | Q218 | *C1 | Q408 | *C2 | Q434 | *C2 | R13 | B2 | R39 | B2 | R65 | *B2 | R91 | *B2 | R218 | C2 | R244 | C2 |
| C243 | B1 | C430 | *C2 | IC15 | B1 | IC412 | *C1 | JC25 | *C1 | Q1 | B2 | Q219 | *C1 | Q409 | D1 | Q435 | *C2 | R14 | B2 | R40 | B1 | R66 | B1 | R92 | *B1 | R219 | C2 | R245 | *C2 |
| C246 | B1 | C431 | *D2 | IC16 | B2 | | | JC26 | *C1 | Q2 | B2 | Q301 | *A3 | Q410 | D1 | Q436 | *D2 | R15 | B2 | R41 | B2 | R67 | B1 | R93 | *B2 | R220 | *B2 | R246 | *C2 |
| C247 | *B1 | C432 | *C2 | IC18 | *A1 | JC1 | *B1 | JC27 | *C1 | Q3 | A2 | Q302 | *B3 | Q411 | *D2 | Q437 | *D2 | R16 | B2 | R42 | B1 | R68 | B1 | R94 | *B2 | R221 | C2 | R247 | *C2 |
| C248 | *C1 | C433 | *D2 | IC19 | B1 | JC2 | *B1 | JC28 | *C1 | Q4 | A2 | Q303 | *B3 | Q412 | *D2 | Q438 | D2 | R17 | B2 | R43 | B2 | R69 | *B1 | R95 | *B1 | R222 | C2 | R248 | *C2 |
| C249 | *B1 | C434 | *C2 | IC20 | *B1 | JC3 | *B1 | JC29 | *C1 | Q5 | *B3 | Q304 | *B3 | Q413 | *C2 | Q439 | C2 | R18 | *A3 | R44 | *B1 | R70 | B1 | R96 | *B2 | R223 | *C2 | R249 | B2 |
| C250 | *C1 | C435 | D1 | IC21 | *B2 | JC4 | *B1 | JC30 | *B1 | Q6 | *B3 | Q305 | *A3 | Q414 | *C2 | Q440 | *D2 | R19 | *A3 | R45 | B1 | R71 | B1 | R97 | *B2 | R224 | *C2 | R250 | C2 |
| C252 | B3 | C436 | D1 | IC201 | C2 | JC5 | *B1 | JC201 | *B2 | Q7 | *B2 | Q306 | A2 | Q415 | C1 | Q441 | *C2 | R20 | *A2 | R46 | B1 | R72 | B1 | R98 | *B1 | R225 | *C2 | R251 | B2 |
| C253 | *B3 | C437 | D2 | IC202 | *C1 | JC6 | *B1 | JC202 | *B2 | Q8 | *B2 | Q307 | *A2 | Q416 | *D3 | Q442 | *D2 | R21 | *A2 | R47 | B1 | R73 | B1 | R99 | *B2 | R226 | *C2 | R252 | B2 |
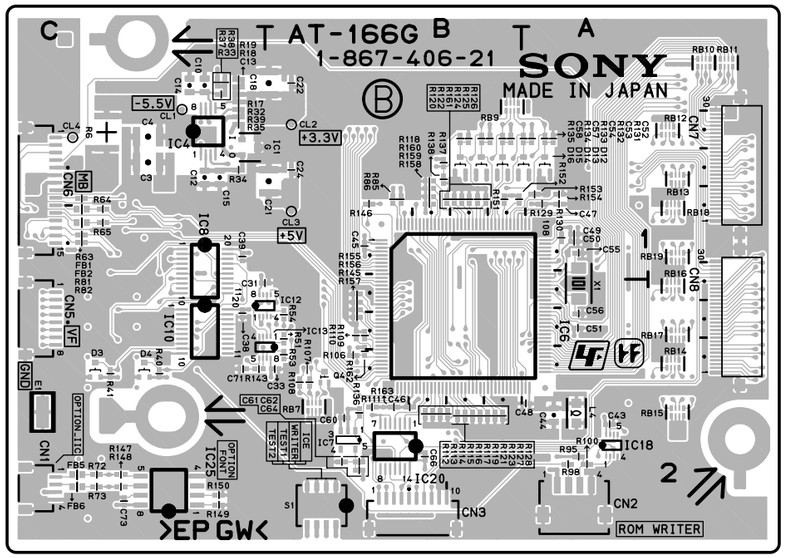
| | | | | | | | | | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| R253 | B2 | R346 | *B2 | R439 | *D3 | R531 | *D2 | | | | | | | | | | | | | | | | |
| R254 | B2 | R347 | *B2 | R440 | *D3 | R532 | *D2 | | | | | | | | | | | | | | | | |
| R255 | *C2 | R348 | *A2 | R441 | *D3 | R533 | *D2 | | | | | | | | | | | | | | | | |
| R256 | *C2 | R349 | *A2 | R442 | *C3 | R534 | *C2 | | | | | | | | | | | | | | | | |
| R257 | *C2 | R350 | A2 | R443 | *C1 | R535 | *C2 | | | | | | | | | | | | | | | | |
| R258 | *C2 | R351 | *A2 | R444 | *C1 | R536 | *C2 | | | | | | | | | | | | | | | | |
| R259 | *C2 | R352 | *A3 | R445 | *D3 | R537 | D1 | | | | | | | | | | | | | | | | |
| R260 | *C2 | R353 | A2 | R446 | *D3 | R538 | C1 | | | | | | | | | | | | | | | | |
| R261 | *C2 | R354 | A2 | R447 | *D3 | R539 | D1 | | | | | | | | | | | | | | | | |
| R262 | *C2 | R355 | *A2 | R448 | *D3 | R540 | D1 | | | | | | | | | | | | | | | | |
| R263 | C2 | R356 | B2 | R449 | *D3 | R541 | D1 | | | | | | | | | | | | | | | | |
| R264 | B2 | R357 | A2 | R450 | *C3 | R542 | D1 | | | | | | | | | | | | | | | | |
| R265 | C2 | R358 | A2 | R451 | *C3 | R543 | D1 | | | | | | | | | | | | | | | | |
| R266 | C2 | R359 | *A2 | R452 | *C3 | R544 | D1 | | | | | | | | | | | | | | | | |
| R267 | B2 | R360 | *A2 | R453 | *C1 | R545 | C1 | | | | | | | | | | | | | | | | |
| R268 | B2 | R361 | *A3 | R454 | *C1 | R546 | C1 | | | | | | | | | | | | | | | | |
| R269 | B2 | R362 | *A1 | R455 | D3 | R547 | C1 | | | | | | | | | | | | | | | | |
| R270 | C2 | R363 | *A1 | R456 | D3 | R548 | C1 | | | | | | | | | | | | | | | | |
| R271 | C2 | R364 | *A2 | R457 | D2 | R549 | C1 | | | | | | | | | | | | | | | | |
| R272 | B2 | R365 | *A2 | R458 | *C1 | R550 | C1 | | | | | | | | | | | | | | | | |
| R273 | C2 | R366 | *B2 | R459 | D3 | R551 | D1 | | | | | | | | | | | | | | | | |
| R274 | B2 | R367 | *B2 | R460 | D3 | R552 | C1 | | | | | | | | | | | | | | | | |
| R275 | C2 | R368 | *B2 | R461 | D2 | R553 | *C1 | | | | | | | | | | | | | | | | |
| R276 | B2 | R369 | *A1 | R462 | C3 | R554 | *C3 | | | | | | | | | | | | | | | | |
| R277 | B2 | R370 | *A1 | R463 | C3 | R555 | *D2 | | | | | | | | | | | | | | | | |
| R278 | C2 | R371 | B2 | R464 | *C1 | R556 | *C2 | | | | | | | | | | | | | | | | |
| R279 | B2 | R372 | *A1 | R465 | C2 | R601 | C1 | | | | | | | | | | | | | | | | |
| R280 | *C1 | R373 | *A1 | R466 | C3 | R602 | C1 | | | | | | | | | | | | | | | | |
| R281 | C2 | R374 | *B2 | R467 | C3 | R603 | B1 | | | | | | | | | | | | | | | | |
| R282 | B2 | R375 | *B2 | R468 | C2 | R604 | C1 | | | | | | | | | | | | | | | | |
| R283 | *C1 | R376 | *B2 | R469 | *D3 | R605 | C1 | | | | | | | | | | | | | | | | |
| R284 | C2 | R377 | *A2 | R470 | *D3 | R606 | C1 | | | | | | | | | | | | | | | | |
| R285 | B2 | R378 | *A2 | R471 | *D3 | R607 | B1 | | | | | | | | | | | | | | | | |
| R286 | *B3 | R379 | *A2 | R472 | *D3 | R608 | B1 | | | | | | | | | | | | | | | | |
| R287 | *C3 | R380 | *A2 | R473 | *C3 | R609 | B1 | | | | | | | | | | | | | | | | |
| R288 | *B3 | R381 | *A2 | R474 | *C3 | R610 | B1 | | | | | | | | | | | | | | | | |
| R289 | *B3 | R382 | *A1 | R475 | *C3 | R611 | B1 | | | | | | | | | | | | | | | | |
| R290 | C1 | R383 | *A3 | R476 | *C3 | R613 | *C1 | | | | | | | | | | | | | | | | |
| R291 | *B3 | R384 | *A3 | R477 | D2 | R614 | *C2 | | | | | | | | | | | | | | | | |
| R292 | *B3 | R385 | *A2 | R478 | *D2 | R615 | C1 | | | | | | | | | | | | | | | | |
| R293 | *C3 | R386 | *A1 | R479 | C2 | R616 | *B2 | | | | | | | | | | | | | | | | |
| R294 | *B3 | R387 | *A2 | R480 | *C2 | R617 | B2 | | | | | | | | | | | | | | | | |
| R295 | C1 | R388 | *A2 | R481 | D1 | R650 | *A1 | | | | | | | | | | | | | | | | |
| R296 | C1 | R389 | *A3 | R482 | D1 | R651 | *A2 | | | | | | | | | | | | | | | | |
| R297 | C1 | R390 | *A2 | R483 | D2 | R652 | *A1 | | | | | | | | | | | | | | | | |
| R298 | C1 | R391 | *A1 | R484 | D1 | R659 | A1 | | | | | | | | | | | | | | | | |
| R299 | C1 | R392 | *A3 | R485 | D1 | R660 | *B3 | | | | | | | | | | | | | | | | |
| R301 | *A3 | R393 | *A2 | R486 | D2 | R661 | *B3 | | | | | | | | | | | | | | | | |
| R302 | *B3 | R394 | B2 | R487 | D2 | R662 | *A2 | | | | | | | | | | | | | | | | |
| R303 | *B3 | R395 | *A1 | R488 | D2 | R663 | *A3 | | | | | | | | | | | | | | | | |
| R304 | *B3 | R396 | B1 | R489 | *D2 | | | | | | | | | | | | | | | | | | |
| R305 | *A3 | R397 | A1 | R490 | *D2 | RV1 | A1 | | | | | | | | | | | | | | | | |
| R306 | *A3 | R398 | B1 | R491 | *D2 | RV2 | A1 | | | | | | | | | | | | | | | | |
| R307 | *A3 | R399 | B1 | R492 | *D2 | | | | | | | | | | | | | | | | | | |
| R308 | *A3 | R401 | *D2 | R493 | *C2 | S1 | A1 | | | | | | | | | | | | | | | | |
| R309 | B3 | R402 | C2 | R494 | *C2 | S2 | A2 | | | | | | | | | | | | | | | | |
| R310 | A3 | R403 | *D2 | R495 | *D2 | S3 | D1 | | | | | | | | | | | | | | | | |
| R311 | A3 | R404 | *D3 | R496 | *D2 | | | | | | | | | | | | | | | | | | |
| R312 | B3 | R405 | *D2 | R497 | *D2 | THP3 | *B3 | | | | | | | | | | | | | | | | |
| R313 | B2 | R406 | *C1 | R498 | *D2 | THP4 | *B3 | | | | | | | | | | | | | | | | |
| R314 | A2 | R407 | *C1 | R499 | *D2 | THP6 | *A2 | | | | | | | | | | | | | | | | |
| R315 | *A2 | R408 | D1 | R500 | *D2 | | | | | | | | | | | | | | | | | | |
| R316 | *A2 | R409 | C1 | R501 | *D2 | *:B SIDE | | | | | | | | | | | | | | | | | |
| R317 | *A3 | R410 | *D2 | R502 | *C2 | | | | | | | | | | | | | | | | | | |
| R318 | *A3 | R411 | *D2 | R503 | *C2 | | | | | | | | | | | | | | | | | | |
| R319 | *A2 | R412 | *C2 | R504 | *C2 | | | | | | | | | | | | | | | | | | |
| R320 | *A2 | R413 | *D1 | R505 | *D2 | | | | | | | | | | | | | | | | | | |
| R321 | *A3 | R414 | *D1 | R506 | *D2 | | | | | | | | | | | | | | | | | | |
| R322 | *A3 | R415 | *D1 | R507 | D2 | | | | | | | | | | | | | | | | | | |
| R323 | *A2 | R416 | *D1 | R508 | C2 | | | | | | | | | | | | | | | | | | |
| R324 | *A3 | R417 | *D1 | R509 | *D2 | | | | | | | | | | | | | | | | | | |
| R325 | A2 | R418 | *D3 | R510 | *D2 | | | | | | | | | | | | | | | | | | |
| R326 | A2 | R419 | *D3 | R511 | *D2 | | | | | | | | | | | | | | | | | | |
| R327 | *A2 | R420 | *D3 | R512 | *D2 | | | | | | | | | | | | | | | | | | |
| R328 | *A2 | R421 | *C3 | R513 | *C2 | | | | | | | | | | | | | | | | | | |
| R329 | *B2 | R422 | *D2 | R514 | *C2 | | | | | | | | | | | | | | | | | | |
| R330 | *B2 | R423 | *D2 | R515 | *D2 | | | | | | | | | | | | | | | | | | |
| R331 | *A2 | R424 | *C2 | R516 | *D2 | | | | | | | | | | | | | | | | | | |
| R332 | *A2 | R425 | *C2 | R517 | D1 | | | | | | | | | | | | | | | | | | |
| R333 | A2 | R426 | *D1 | R518 | D1 | | | | | | | | | | | | | | | | | | |
| R334 | A2 | R427 | *D3 | R519 | *D2 | | | | | | | | | | | | | | | | | | |
| R335 | A3 | R428 | *D3 | R520 | D1 | | | | | | | | | | | | | | | | | | |
| R336 | A3 | R429 | *C3 | R521 | D1 | | | | | | | | | | | | | | | | | | |
| R337 | *A2 | R430 | *C3 | R522 | *C2 | | | | | | | | | | | | | | | | | | |
| R338 | *A3 | R431 | *D3 | R523 | D1 | | | | | | | | | | | | | | | | | | |
| R339 | *A1 | R432 | *D3 | R524 | C1 | | | | | | | | | | | | | | | | | | |
| R340 | *A1 | R433 | *D3 | R525 | D1 | | | | | | | | | | | | | | | | | | |
| R341 | *B2 | R434 | *D2 | R526 | D1 | | | | | | | | | | | | | | | | | | |
| R342 | *B2 | R435 | *D3 | R527 | C1 | | | | | | | | | | | | | | | | | | |
| R343 | *B2 | R436 | *D3 | R528 | C1 | | | | | | | | | | | | | | | | | | |
| R344 | *A2 | R437 | *C3 | R529 | *D2 | | | | | | | | | | | | | | | | | | |
| R345 | *A2 | R438 | *C2 | R530 | *C2 | | | | | | | | | | | | | | | | | | |



**AU-298** -A SIDE-
SUFFIX: -12



**AU-298** -B SIDE-
SUFFIX: -12

AU-298 (1-865-933-13,31)

| | | | | | |
|---|---|---|---|---|---|
| C1 | A3 | C252 | B3 | C430 | *C2 |
| C2 | A3 | C253 | *B3 | C431 | *D2 |
| C3 | B3 | C254 | B3 | C432 | *C2 |
| C4 | B3 | C255 | *B3 | C433 | *D2 |
| C5 | *A3 | C256 | C2 | C434 | *C2 |
| C6 | *A3 | C257 | B2 | C435 | D1 |
| C7 | A3 | C258 | *C3 | C436 | D1 |
| C8 | A3 | C259 | *C3 | C437 | D2 |
| C9 | *A2 | C260 | *C3 | C438 | C2 |
| C10 | B2 | C261 | C1 | C439 | D1 |
| C11 | B2 | C262 | C1 | C440 | D1 |
| C12 | *A2 | C301 | B3 | C441 | D1 |
| C13 | *B2 | C302 | A3 | C442 | C1 |
| C14 | *B2 | C303 | A3 | C443 | *D2 |
| C15 | *B2 | C304 | A2 | C444 | *C2 |
| C16 | *A2 | C305 | B3 | C445 | D1 |
| C17 | *A2 | C306 | *A2 | C446 | C1 |
| C18 | *A2 | C307 | *A2 | C447 | *D1 |
| C19 | *B2 | C308 | *B2 | C448 | *D1 |
| C20 | *B2 | C309 | A2 | C449 | *D2 |
| C21 | *A2 | C310 | *B2 | C450 | *D2 |
| C22 | B2 | C311 | *A2 | C451 | *D1 |
| C23 | B2 | C312 | *A3 | C452 | *D3 |
| C24 | A2 | C313 | A2 | C453 | D3 |
| C25 | A2 | C314 | A2 | | |
| C26 | *C3 | C315 | *A2 | CL1 | B2 |
| C28 | *B2 | C316 | *A3 | CL2 | B2 |
| C29 | *B2 | C317 | B2 | CL3 | B2 |
| C30 | A1 | C318 | *A1 | CL4 | B2 |
| C31 | *B2 | C319 | *A1 | CL6 | A2 |
| C32 | A1 | C320 | A2 | CL7 | A2 |
| C33 | *B2 | C321 | A3 | CL8 | B2 |
| C34 | *B2 | C322 | *B2 | CL9 | B2 |
| C35 | B1 | C323 | A2 | | |
| C36 | B2 | C324 | A3 | CN1 | B3 |
| C37 | *B1 | C325 | A1 | | |
| C38 | *C1 | C326 | A1 | D1 | *A3 |
| C39 | *C1 | C327 | A1 | D2 | *A3 |
| C40 | B1 | C328 | A1 | D3 | B2 |
| C41 | C1 | C329 | *A1 | D4 | B2 |
| C42 | C1 | C330 | *A1 | D5 | *A3 |
| C45 | *B2 | C331 | A2 | D6 | *A3 |
| C46 | A1 | C332 | *A1 | D7 | B2 |
| C47 | B2 | C333 | *A1 | D8 | B2 |
| C48 | B2 | C334 | A2 | D9 | B2 |
| C201 | B2 | C335 | A2 | D10 | B2 |
| C202 | *B1 | C336 | A2 | D11 | *B1 |
| C203 | C3 | C337 | A2 | D12 | *B1 |
| C204 | C3 | C338 | A1 | D201 | *C2 |
| C205 | *B1 | C340 | A2 | D202 | *C2 |
| C206 | *B2 | C342 | *A1 | D203 | *C2 |
| C207 | C2 | C343 | A3 | D204 | *C2 |
| C208 | C2 | C344 | A3 | D205 | *B1 |
| C209 | C3 | C345 | A3 | D206 | *B1 |
| C210 | C3 | C346 | A3 | D207 | *C2 |
| C211 | *C2 | C347 | *A1 | D301 | *B2 |
| C212 | *C2 | C349 | *A2 | D302 | *B2 |
| C213 | *B2 | C350 | *A3 | D303 | *A2 |
| C214 | *C2 | C351 | *A3 | D304 | *A2 |
| C215 | C2 | C352 | *A3 | D401 | D1 |
| C216 | *C2 | C353 | *A3 | D402 | C1 |
| C217 | *B2 | C354 | A1 | D403 | *D2 |
| C218 | *C2 | C355 | B1 | D404 | *D2 |
| C219 | C2 | C401 | *C1 | D405 | *D2 |
| C220 | C2 | C402 | *D1 | D406 | *C2 |
| C221 | C2 | C403 | *D3 | D407 | *D1 |
| C222 | *C2 | C404 | *D3 | D408 | D1 |
| C223 | B2 | C405 | *D3 | D409 | D1 |
| C224 | B2 | C406 | *C3 | D410 | C1 |
| C225 | C2 | C407 | *D3 | D411 | C1 |
| C227 | C3 | C408 | *D3 | D412 | *D2 |
| C228 | B3 | C409 | *C3 | D413 | *C2 |
| C229 | C2 | C410 | *C3 | D414 | *D2 |
| C230 | B2 | C411 | D2 | D415 | *C2 |
| C231 | C3 | C412 | D2 | D416 | *D2 |
| C232 | B3 | C413 | D2 | D417 | *D2 |
| C233 | C3 | C414 | C2 | D418 | *D2 |
| C234 | *C3 | C415 | D3 | D419 | *D2 |
| C235 | C3 | C416 | D3 | D420 | *D2 |
| C236 | *C3 | C417 | D3 | D421 | *D2 |
| C237 | C1 | C418 | C3 | D422 | *D2 |
| C238 | B1 | C419 | D3 | D423 | *D2 |
| C239 | C1 | C420 | D3 | D424 | *C2 |
| C240 | C1 | C421 | C3 | D425 | *C2 |
| C241 | *C1 | C422 | C3 | D426 | *D2 |
| C242 | *C1 | C423 | *D3 | D427 | *D2 |
| C243 | B1 | C424 | *C3 | | |
| C246 | B1 | C425 | *D2 | E1 | C1 |
| C247 | *B1 | C426 | *D2 | | |
| C248 | *C1 | C427 | *D2 | HB001 | *A1 |
| C249 | *B1 | C428 | *D2 | | |
| C250 | *C1 | C429 | *D2 | IC3 | B2 |

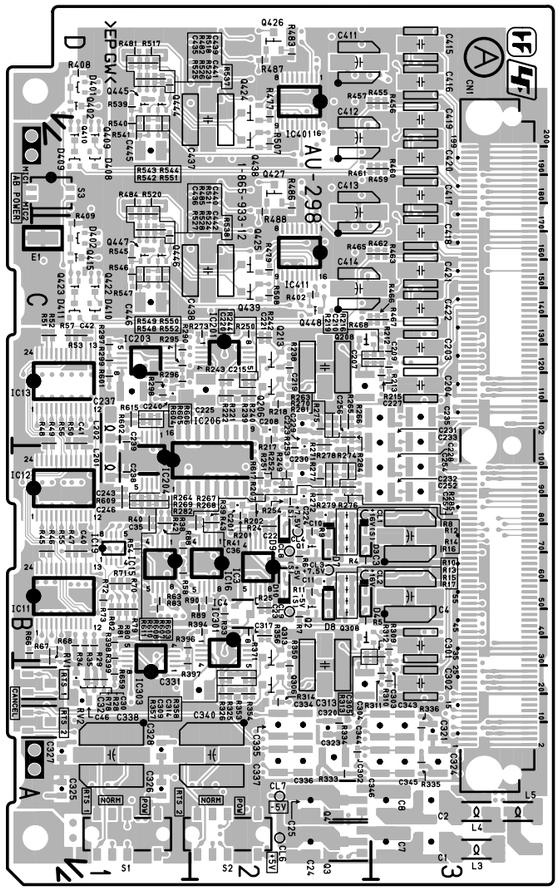


**AU-298** -A SIDE-

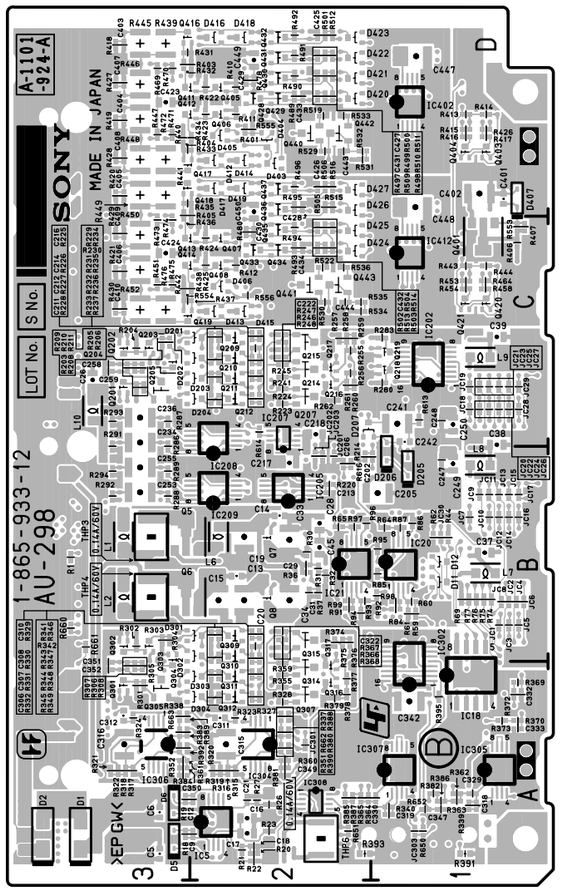SUFFIX: -13, 31




**AU-298** -B SIDE-

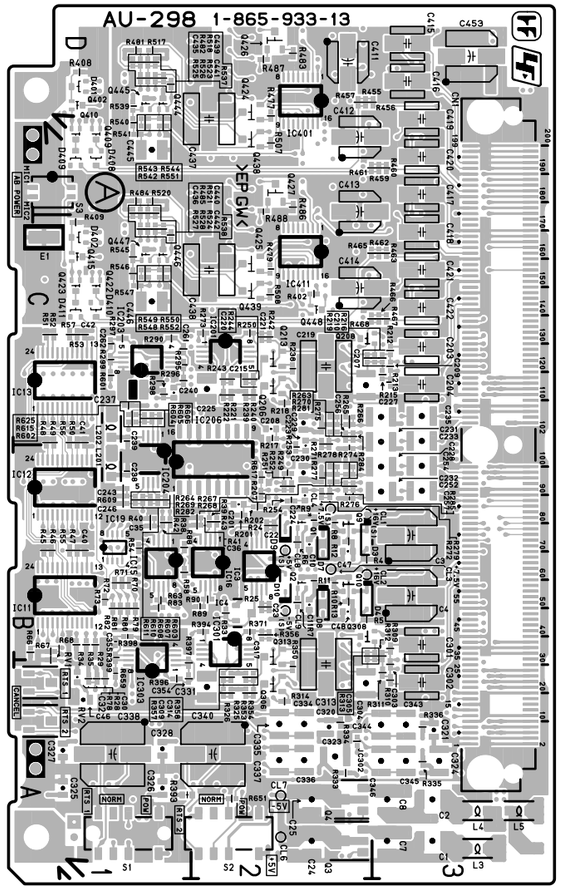SUFFIX: -13, 31

| | | | | | | | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| IC4 | B2 | IC308 | *A2 | JC22 | *C1 | Q1 | B2 | Q218 | *C1 | Q407 | *C2 | Q434 | *C2 | R13 | B2 | R44 | *B1 | R71 | B1 | R98 | *B1 | R226 | *C2 |
| IC5 | *A2 | IC401 | D2 | JC23 | *C1 | Q2 | B2 | Q219 | *C1 | Q408 | *C2 | Q435 | *C2 | R18 | *A3 | R45 | B1 | R72 | B1 | R99 | *B2 | R227 | *C2 |
| IC11 | B1 | IC402 | *D1 | JC24 | *C1 | Q3 | A2 | Q220 | *C2 | Q409 | D1 | Q436 | *D2 | R19 | *A3 | R46 | B1 | R73 | B1 | R201 | B2 | R228 | *C2 |
| IC12 | B1 | IC411 | C2 | JC25 | *C1 | Q4 | A2 | Q301 | *A3 | Q410 | D1 | Q437 | *D2 | R20 | *A2 | R47 | B1 | R74 | *B1 | R202 | B2 | R229 | *C2 |
| IC13 | C1 | IC412 | *C1 | JC26 | *C1 | Q5 | *B3 | Q302 | *B3 | Q411 | *D2 | Q438 | D2 | R21 | *A2 | R48 | C1 | R75 | *B1 | R203 | *C3 | R230 | *C2 |
| IC15 | B1 | | | JC27 | *C1 | Q6 | *B3 | Q303 | *B3 | Q412 | *D2 | Q439 | C2 | R22 | *A2 | R49 | C1 | R76 | *B1 | R204 | *C3 | R231 | *C2 |
| IC16 | B2 | JC1 | *B1 | JC28 | *C1 | Q7 | *B2 | Q304 | *B3 | Q413 | *C2 | Q440 | *D2 | R23 | *A2 | R50 | C1 | R77 | *B1 | R205 | *C3 | R232 | *C2 |
| IC18 | *A1 | JC2 | *B1 | JC29 | *C1 | Q8 | *B2 | Q305 | *A3 | Q414 | *C2 | Q441 | *C2 | R24 | B2 | R51 | C1 | R78 | A1 | R206 | *C3 | R233 | *C2 |
| IC19 | B1 | JC3 | *B1 | JC30 | *B1 | Q9 | B2 | Q306 | A2 | Q415 | C1 | Q442 | *D2 | R25 | B2 | R52 | C1 | R79 | B1 | R207 | B2 | R234 | *C2 |
| IC20 | *B1 | JC4 | *B1 | JC201 | *B2 | Q10 | B2 | Q307 | *A2 | Q416 | *D3 | Q443 | *C2 | R26 | *A2 | R53 | C1 | R80 | B1 | R208 | *C3 | R235 | *C2 |
| IC21 | *B2 | JC5 | *B1 | JC202 | *B2 | Q201 | *C3 | Q308 | B2 | Q417 | *D3 | Q444 | D1 | R27 | *A2 | R54 | B1 | R81 | B1 | R209 | *C3 | R236 | *C2 |
| IC201 | C2 | JC6 | *B1 | JC203 | *B2 | Q202 | *C3 | Q309 | *B2 | Q418 | *D3 | Q445 | D1 | R28 | A1 | R55 | B1 | R82 | B1 | R210 | *C3 | R237 | *C2 |
| IC202 | *C1 | JC7 | *B1 | JC301 | *A2 | Q203 | *C3 | Q310 | *B2 | Q419 | *C3 | Q446 | C1 | R29 | B1 | R56 | C1 | R83 | B1 | R211 | *C3 | R238 | C2 |
| IC203 | C1 | JC8 | *B1 | JC302 | A2 | Q204 | *C3 | Q311 | *A2 | Q420 | *C1 | Q447 | C1 | R30 | *B2 | R57 | C1 | R84 | *B1 | R212 | C3 | R239 | C2 |
| IC204 | B1 | JC9 | *B1 | JC303 | *A1 | Q205 | *C3 | Q312 | *A2 | Q421 | *C1 | Q448 | C2 | R31 | *B2 | R58 | B1 | R85 | *B1 | R213 | C3 | R240 | C2 |
| IC205 | *B2 | JC10 | *B1 | | | Q206 | C2 | Q313 | B2 | Q422 | C1 | Q449 | *D3 | R32 | *B2 | R59 | *B1 | R86 | *B1 | R214 | *B2 | R241 | *C2 |
| IC206 | B2 | JC11 | *B1 | L1 | *B3 | Q207 | *C2 | Q314 | *A2 | Q423 | C1 | | | R33 | B2 | R60 | *B1 | R87 | *B1 | R215 | C3 | R242 | C2 |
| IC207 | *C2 | JC12 | *B1 | L2 | *B3 | Q208 | C2 | Q315 | *B2 | Q424 | D2 | R1 | *B3 | R34 | B1 | R61 | *B1 | R88 | B1 | R216 | C3 | R243 | C2 |
| IC208 | *C2 | JC13 | *B1 | L3 | A3 | Q209 | *C2 | Q316 | *A2 | Q425 | C2 | R4 | B2 | R35 | B1 | R62 | *B1 | R89 | B2 | R217 | C2 | R244 | C2 |
| IC209 | *B2 | JC14 | *B1 | L4 | A3 | Q210 | *C2 | Q317 | *B2 | Q426 | D2 | R5 | B2 | R36 | *B2 | R63 | B1 | R90 | B2 | R218 | C2 | R245 | *C2 |
| IC301 | B2 | JC15 | *B1 | L5 | A3 | Q211 | *C2 | Q320 | *B3 | Q427 | D2 | R6 | B2 | R37 | *B2 | R64 | *B1 | R91 | *B2 | R219 | C2 | R246 | *C2 |
| IC302 | *A1 | JC16 | *B1 | L7 | *B1 | Q212 | *C2 | Q401 | *C1 | Q428 | *D2 | R7 | B2 | R38 | B1 | R65 | *B2 | R92 | *B1 | R220 | *B2 | R247 | *C2 |
| IC303 | B1 | JC17 | *B1 | L8 | *B1 | Q213 | C2 | Q402 | D1 | Q429 | *D2 | R8 | B2 | R39 | B2 | R66 | B1 | R93 | *B2 | R221 | C2 | R248 | *C2 |
| IC304 | *A2 | JC18 | *C1 | L9 | *C1 | Q214 | *C2 | Q403 | *D1 | Q430 | *D2 | R9 | B2 | R40 | B1 | R67 | B1 | R94 | *B2 | R222 | C2 | R249 | B2 |
| IC305 | *A1 | JC19 | *C1 | L10 | *C3 | Q215 | *C2 | Q404 | *D1 | Q431 | *D2 | R10 | B2 | R41 | B2 | R68 | A1 | R95 | *B1 | R223 | *C2 | R250 | C2 |
| IC306 | *A3 | JC20 | *C1 | L201 | B1 | Q216 | *C2 | Q405 | *D2 | Q432 | *D2 | R11 | B2 | R42 | B1 | R69 | *B1 | R96 | *B2 | R224 | *C2 | R251 | B2 |
| IC307 | *A1 | JC21 | *C1 | L202 | C1 | Q217 | *C2 | Q406 | *D2 | Q433 | *C2 | R12 | B2 | R43 | B2 | R70 | B1 | R97 | *B2 | R225 | *C2 | R252 | B2 |

| | | | | | | | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| R253 | B2 | R346 | *B2 | R439 | *D3 | R531 | *D2 | | | | | | | | | | | | | | |
| R254 | B2 | R347 | *B2 | R440 | *D3 | R532 | *D2 | | | | | | | | | | | | | | |
| R255 | *C2 | R348 | *A2 | R441 | *D3 | R533 | *D2 | | | | | | | | | | | | | | |
| R256 | *C2 | R349 | *A2 | R442 | *C3 | R534 | *C2 | | | | | | | | | | | | | | |
| R257 | *C2 | R350 | A2 | R443 | *C1 | R535 | *C2 | | | | | | | | | | | | | | |
| R258 | *C2 | R351 | *A2 | R444 | *C1 | R536 | *C2 | | | | | | | | | | | | | | |
| R259 | *C2 | R352 | *A3 | R445 | *D3 | R537 | D1 | | | | | | | | | | | | | | |
| R260 | *C2 | R353 | A2 | R446 | *D3 | R538 | C1 | | | | | | | | | | | | | | |
| R261 | *C2 | R354 | A2 | R447 | *D3 | R539 | D1 | | | | | | | | | | | | | | |
| R262 | *C2 | R355 | *A2 | R448 | *D3 | R540 | D1 | | | | | | | | | | | | | | |
| R263 | C2 | R356 | B2 | R449 | *D3 | R541 | D1 | | | | | | | | | | | | | | |
| R264 | B2 | R357 | A2 | R450 | *C3 | R542 | D1 | | | | | | | | | | | | | | |
| R265 | C2 | R358 | A2 | R451 | *C3 | R543 | D1 | | | | | | | | | | | | | | |
| R266 | C2 | R359 | *A2 | R452 | *C3 | R544 | D1 | | | | | | | | | | | | | | |
| R267 | B2 | R360 | *A2 | R453 | *C1 | R545 | C1 | | | | | | | | | | | | | | |
| R268 | B2 | R361 | *A3 | R454 | *C1 | R546 | C1 | | | | | | | | | | | | | | |
| R269 | B2 | R362 | *A1 | R455 | D2 | R547 | C1 | | | | | | | | | | | | | | |
| R270 | C2 | R363 | *A1 | R456 | D3 | R548 | C1 | | | | | | | | | | | | | | |
| R271 | C2 | R364 | *A2 | R457 | D2 | R549 | C1 | | | | | | | | | | | | | | |
| R272 | B2 | R365 | *A2 | R458 | *C1 | R550 | C1 | | | | | | | | | | | | | | |
| R273 | C2 | R366 | *B2 | R459 | D3 | R551 | D1 | | | | | | | | | | | | | | |
| R274 | B2 | R367 | *B2 | R460 | D3 | R552 | C1 | | | | | | | | | | | | | | |
| R275 | C2 | R368 | *B2 | R461 | D2 | R553 | *C1 | | | | | | | | | | | | | | |
| R276 | B2 | R369 | *A1 | R462 | C3 | R554 | *C3 | | | | | | | | | | | | | | |
| R277 | B2 | R370 | *A1 | R463 | C3 | R555 | *D2 | | | | | | | | | | | | | | |
| R278 | C2 | R371 | B2 | R464 | *C1 | R556 | *C2 | | | | | | | | | | | | | | |
| R279 | B2 | R372 | *A1 | R465 | C2 | R561 | *D1 | | | | | | | | | | | | | | |
| R280 | *C1 | R373 | *A1 | R466 | C3 | R562 | *C1 | | | | | | | | | | | | | | |
| R281 | C2 | R374 | *B2 | R467 | C3 | R563 | *C1 | | | | | | | | | | | | | | |
| R282 | B2 | R375 | *B2 | R468 | C2 | R564 | *D3 | | | | | | | | | | | | | | |
| R283 | *C1 | R376 | *B2 | R469 | *D3 | R565 | *D1 | | | | | | | | | | | | | | |
| R284 | C2 | R377 | *A2 | R470 | *D3 | R566 | *D3 | | | | | | | | | | | | | | |
| R285 | B2 | R378 | *A2 | R471 | *D3 | R601 | C1 | | | | | | | | | | | | | | |
| R286 | *B3 | R379 | *A2 | R472 | *D3 | R602 | C1 | | | | | | | | | | | | | | |
| R287 | *C3 | R380 | *A2 | R473 | *C3 | R603 | B1 | | | | | | | | | | | | | | |
| R288 | *B3 | R381 | *A2 | R474 | *C3 | R604 | C1 | | | | | | | | | | | | | | |
| R289 | *B3 | R382 | *A1 | R475 | *C3 | R605 | C1 | | | | | | | | | | | | | | |
| R290 | C1 | R383 | *A3 | R476 | *C3 | R606 | C1 | | | | | | | | | | | | | | |
| R291 | *B3 | R384 | *A3 | R477 | D2 | R607 | B1 | | | | | | | | | | | | | | |
| R292 | *B3 | R385 | *A2 | R478 | *D2 | R608 | B1 | | | | | | | | | | | | | | |
| R293 | *C3 | R386 | *A1 | R479 | C2 | R609 | B1 | | | | | | | | | | | | | | |
| R294 | *B3 | R387 | *A2 | R480 | *C2 | R610 | B1 | | | | | | | | | | | | | | |
| R295 | C1 | R388 | *A2 | R481 | D1 | R611 | B1 | | | | | | | | | | | | | | |
| R296 | C1 | R389 | *A3 | R482 | D1 | R613 | *C1 | | | | | | | | | | | | | | |
| R297 | C1 | R390 | *A2 | R483 | D2 | R614 | *C2 | | | | | | | | | | | | | | |
| R298 | C1 | R391 | *A1 | R484 | D1 | R615 | C1 | | | | | | | | | | | | | | |
| R299 | C1 | R392 | *A3 | R485 | D1 | R616 | *B2 | | | | | | | | | | | | | | |
| R301 | *A3 | R393 | A1 | R486 | D2 | R617 | B2 | | | | | | | | | | | | | | |
| R302 | *B3 | R394 | B2 | R487 | D2 | R618 | *B3 | | | | | | | | | | | | | | |
| R303 | *B3 | R395 | *A1 | R488 | D2 | R619 | *C3 | | | | | | | | | | | | | | |
| R304 | *B3 | R396 | A1 | R489 | *D2 | R620 | *B3 | | | | | | | | | | | | | | |
| R305 | *A3 | R397 | A1 | R490 | *D2 | R621 | *B3 | | | | | | | | | | | | | | |
| R306 | *A3 | R398 | B1 | R491 | *D2 | R622 | *C3 | | | | | | | | | | | | | | |
| R307 | *A3 | R399 | B1 | R492 | *D2 | R623 | *C3 | | | | | | | | | | | | | | |
| R308 | *A3 | R401 | *D2 | R493 | *C2 | R624 | *C2 | | | | | | | | | | | | | | |
| R309 | B3 | R402 | C2 | R494 | *C2 | R625 | C1 | | | | | | | | | | | | | | |
| R310 | A3 | R403 | *D2 | R495 | *D2 | R650 | *A1 | | | | | | | | | | | | | | |
| R311 | A3 | R404 | *D3 | R496 | *D2 | R651 | A2 | | | | | | | | | | | | | | |
| R312 | B3 | R405 | *D2 | R497 | *D2 | R652 | *A1 | | | | | | | | | | | | | | |
| R313 | B2 | R406 | *C1 | R498 | *D2 | R659 | A1 | | | | | | | | | | | | | | |
| R314 | A2 | R407 | *D1 | R499 | *D2 | R660 | *B3 | | | | | | | | | | | | | | |
| R315 | *A2 | R408 | D1 | R500 | *D2 | R661 | *B3 | | | | | | | | | | | | | | |
| R316 | *A2 | R409 | C1 | R501 | *D2 | R662 | *A2 | | | | | | | | | | | | | | |
| R317 | *A3 | R410 | *D2 | R502 | *C2 | R663 | *A3 | | | | | | | | | | | | | | |
| R318 | *A3 | R411 | *D2 | R503 | *C2 | R668 | *A2 | | | | | | | | | | | | | | |
| R319 | *A2 | R412 | *C2 | R504 | *C2 | R669 | *A2 | | | | | | | | | | | | | | |
| R320 | *A2 | R413 | *D1 | R505 | *D2 | R670 | *A2 | | | | | | | | | | | | | | |
| R321 | *A3 | R414 | *D1 | R506 | *D2 | R671 | *A2 | | | | | | | | | | | | | | |
| R322 | *A3 | R415 | *D1 | R507 | D2 | R672 | *B3 | | | | | | | | | | | | | | |
| R323 | *A2 | R416 | *D1 | R508 | C2 | R673 | *A3 | | | | | | | | | | | | | | |
| R324 | *A3 | R417 | *D1 | R509 | *D2 | R674 | *B3 | | | | | | | | | | | | | | |
| R325 | A2 | R418 | *D3 | R510 | *D2 | R675 | *A1 | | | | | | | | | | | | | | |
| R326 | A2 | R419 | *D3 | R511 | *D2 | | | | | | | | | | | | | | | | |
| R327 | *A2 | R420 | *D3 | R512 | *D2 | RV1 | A1 | | | | | | | | | | | | | | |
| R328 | *A2 | R421 | *C3 | R513 | *C2 | RV2 | A1 | | | | | | | | | | | | | | |
| R329 | *B2 | R422 | *D2 | R514 | *C2 | | | | | | | | | | | | | | | | |
| R330 | *B2 | R423 | *D2 | R515 | *D2 | S1 | A1 | | | | | | | | | | | | | | |
| R331 | *A2 | R424 | *C2 | R516 | *D2 | S2 | A2 | | | | | | | | | | | | | | |
| R332 | *A2 | R425 | *C2 | R517 | D1 | S3 | D1 | | | | | | | | | | | | | | |
| R333 | A2 | R426 | *D1 | R518 | D1 | | | | | | | | | | | | | | | | |
| R334 | A2 | R427 | *D3 | R519 | *D2 | THP3 | *B3 | | | | | | | | | | | | | | |
| R335 | A3 | R428 | *D3 | R520 | D1 | THP4 | *B3 | | | | | | | | | | | | | | |
| R336 | A3 | R429 | *C3 | R521 | D1 | THP6 | *A2 | | | | | | | | | | | | | | |
| R337 | *A2 | R430 | *C3 | R522 | *C2 | THP7 | *A2 | | | | | | | | | | | | | | |
| R338 | *A3 | R431 | *D3 | R523 | D1 | | | | | | | | | | | | | | | | |
| R339 | *A1 | R432 | *D3 | R524 | C1 | *:B SIDE | | | | | | | | | | | | | | | |
| R340 | *A1 | R433 | *D3 | R525 | D1 | | | | | | | | | | | | | | | | |
| R341 | *B2 | R434 | *D2 | R526 | D1 | | | | | | | | | | | | | | | | |
| R342 | *B2 | R435 | *D3 | R527 | C1 | | | | | | | | | | | | | | | | |
| R343 | *B2 | R436 | *D3 | R528 | C1 | | | | | | | | | | | | | | | | |
| R344 | *A2 | R437 | *C3 | R529 | *D2 | | | | | | | | | | | | | | | | |
| R345 | *A2 | R438 | *C2 | R530 | *C2 | | | | | | | | | | | | | | | | |

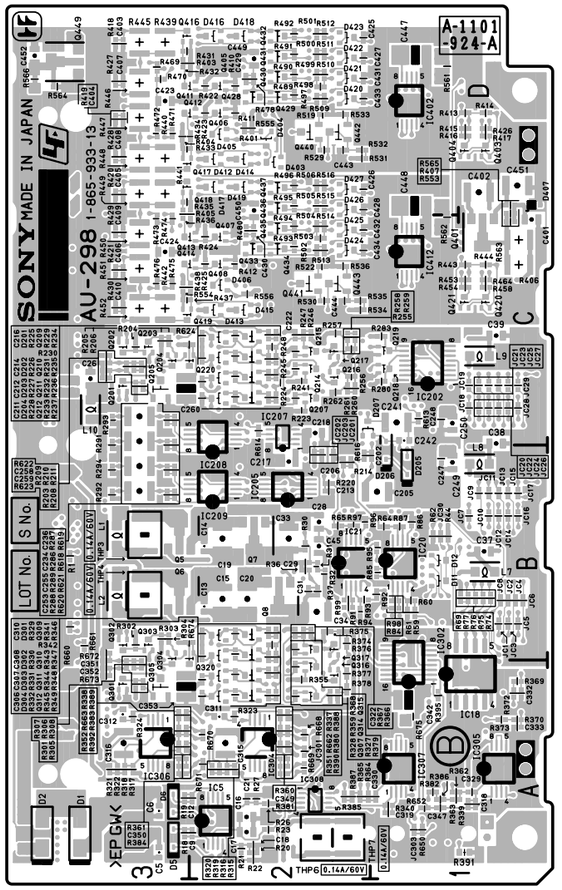BI-175, BI-187

BI-175 (1-868-173-11)

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| C1 | A1 | C34 | B2 | LV1 | A2 | R24 | A1 |
| C2 | A2 | C35 | B2 | LV2 | A2 | R25 | *A1 |
| C3 | A1 | C36 | B2 | | | R26 | *A1 |
| C4 | B2 | C37 | B2 | Q1 | *A1 | R27 | B2 |
| C5 | B2 | C38 | B2 | | | R28 | B2 |
| C6 | A2 | C39 | B2 | R1 | B2 | R29 | B2 |
| C7 | *B1 | C40 | B2 | R2 | B2 | R30 | *B2 |
| C8 | A2 | C41 | B2 | R3 | A2 | R31 | *B2 |
| C9 | *B1 | C42 | B2 | R4 | A2 | R32 | *B2 |
| C10 | A2 | C43 | B2 | R5 | B1 | R33 | *B2 |
| C11 | B2 | C44 | B2 | R6 | B2 | R34 | B2 |
| C12 | A2 | | | R7 | A2 | R37 | B2 |
| C13 | A1 | CN1 | *A2 | R8 | B2 | R40 | B2 |
| C14 | A2 | CN2 | B2 | R9 | A2 | R41 | B2 |
| C16 | *B2 | | | R10 | A2 | R42 | B2 |
| C17 | *B2 | D1 | B1 | R11 | A2 | R43 | B2 |
| C18 | *B2 | D2 | A2 | R12 | A2 | R44 | B2 |
| C19 | *B2 | D3 | B2 | R13 | A2 | R45 | B2 |
| C20 | B2 | D4 | A1 | R14 | A2 | R46 | B2 |
| C22 | B2 | D5 | *A1 | R15 | A2 | R47 | B2 |
| C26 | A2 | D6 | *A1 | R16 | A2 | R48 | B2 |
| C27 | B2 | | | R17 | A2 | R49 | B2 |
| C28 | A1 | IC1 | *A2 | R18 | A2 | R50 | B2 |
| C29 | A1 | IC2 | B1 | R19 | A1 | R51 | B2 |
| C30 | B1 | IC3 | A1 | R20 | A1 | R52 | B2 |
| C31 | B1 | IC4 | *A1 | R21 | A1 | R53 | B2 |
| C32 | B1 | IC5 | B2 | R22 | *A1 | | |
| C33 | A2 | IC6 | B2 | R23 | *A1 | *:B SIDE | |




**BI-175** -A SIDE-
SUFFIX: -11




**BI-175** -B SIDE-
SUFFIX: -11

BI-187 (1-865-963-11)
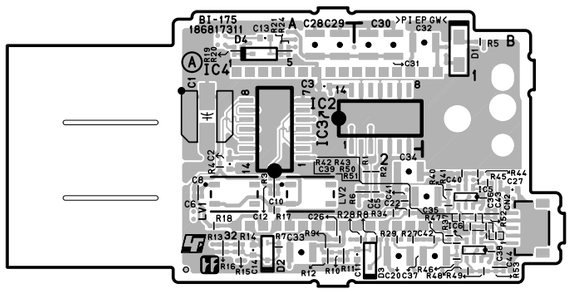
| | | | | | | | |
|---|---|---|---|---|---|---|---|
| C1 | A1 | CN1 | *A1 | R9 | A2 | R37 | B2 |
| C2 | A1 | CN2 | B2 | R10 | A2 | R38 | B2 |
| C3 | A2 | | | R11 | A2 | R39 | B2 |
| C4 | B2 | D1 | A2 | R12 | A2 | | |
| C5 | A2 | D2 | A2 | R13 | A2 | *:B SIDE | |
| C6 | *A2 | D3 | B2 | R14 | A2 | | |
| C7 | A2 | D4 | A1 | R15 | A2 | | |
| C8 | *A2 | D5 | *A1 | R16 | A2 | | |
| C9 | B2 | D6 | *A1 | R17 | A2 | | |
| C10 | A1 | | | R18 | A1 | | |
| C11 | A2 | IC1 | *A2 | R19 | A1 | | |
| C13 | *B2 | IC2 | A1 | R20 | A1 | | |
| C14 | *B2 | IC3 | *A2 | R21 | *A1 | | |
| C15 | *B2 | | | R22 | *A1 | | |
| C16 | *B2 | LV1 | A2 | R23 | A1 | | |
| C17 | B2 | | | R24 | *A1 | | |
| C19 | B2 | Q1 | *A1 | R25 | *A1 | | |
| C21 | B2 | Q2 | B2 | R26 | A2 | | |
| C22 | B1 | Q3 | B2 | R27 | B2 | | |
| C23 | A2 | | | R28 | B2 | | |
| C24 | B1 | R1 | A2 | R29 | B2 | | |
| C25 | A1 | R2 | B2 | R30 | *B2 | | |
| C26 | A1 | R3 | A2 | R31 | *B2 | | |
| C27 | B1 | R4 | A2 | R32 | *B2 | | |
| C28 | B1 | R5 | A2 | R33 | *B2 | | |
| C29 | B2 | R6 | A2 | R34 | B2 | | |
| C30 | B2 | R7 | B2 | R35 | B2 | | |
| C31 | *B2 | R8 | A2 | R36 | B2 | | |

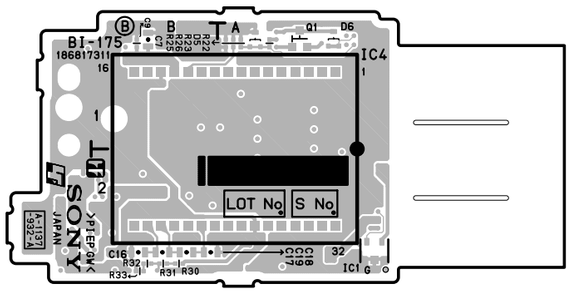


**BI-187** -A SIDE-
SUFFIX: -11




**BI-187** -B SIDE-
SUFFIX: -11

BI-175, BI-187

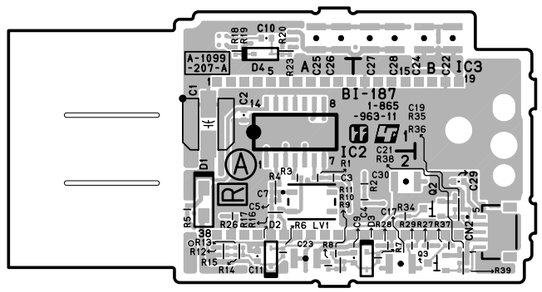BI-175 (1-868-173-12)

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| C1 | A1 | C34 | B2 | LV1 | A2 | R25 | *A1 |
| C2 | A2 | C35 | B2 | LV2 | A2 | R26 | *A1 |
| C3 | A1 | C36 | B2 | | | R27 | B2 |
| C4 | B2 | C37 | B2 | Q1 | *A1 | R28 | B2 |
| C5 | B2 | C38 | B2 | | | R29 | B2 |
| C6 | A2 | C39 | B2 | R1 | B2 | R30 | *B2 |
| C7 | *B1 | C40 | B2 | R2 | B2 | R31 | *B2 |
| C8 | A2 | C41 | B2 | R3 | A2 | R32 | *B2 |
| C9 | *B1 | C42 | B2 | R4 | A2 | R33 | *B2 |
| C10 | A2 | C43 | B2 | R5 | B1 | R34 | B2 |
| C11 | B2 | C44 | B2 | R6 | B2 | R35 | B2 |
| C12 | A2 | | | R7 | A2 | R36 | B2 |
| C13 | A1 | CN1 | *A2 | R8 | B2 | R37 | B2 |
| C14 | A2 | CN2 | B2 | R9 | A2 | R40 | B2 |
| C15 | B2 | | | R10 | A2 | R41 | B2 |
| C16 | *B2 | D1 | B1 | R11 | A2 | R42 | B2 |
| C17 | *B2 | D2 | A2 | R12 | A2 | R43 | B2 |
| C18 | *B2 | D3 | B2 | R13 | A2 | R44 | B2 |
| C19 | *B2 | D4 | A1 | R14 | A2 | R45 | B2 |
| C20 | B2 | D5 | *A1 | R15 | A2 | R46 | B2 |
| C22 | B2 | D6 | *A1 | R16 | A2 | R47 | B2 |
| C26 | A2 | | | R17 | A2 | R48 | B2 |
| C27 | B2 | IC1 | *A2 | R18 | A2 | R49 | B2 |
| C28 | A1 | IC2 | A1 | R19 | A1 | R50 | B2 |
| C29 | A1 | IC3 | A2 | R20 | A1 | R51 | B2 |
| C30 | B1 | IC4 | *A1 | R21 | A1 | R52 | B2 |
| C31 | B1 | IC5 | B2 | R22 | *A1 | R53 | B2 |
| C32 | B1 | IC6 | B2 | R23 | *A1 | | |
| C33 | A2 | | | R24 | A1 | *:B SIDE | |

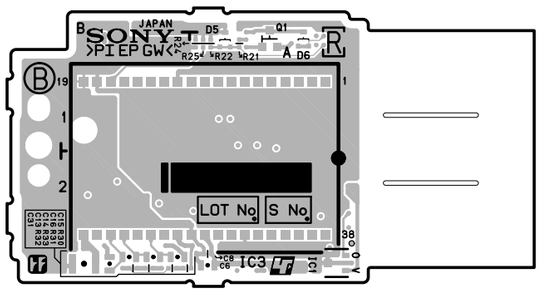


**BI-175** -A SIDE-
SUFFIX: -12




**BI-175** -B SIDE-
SUFFIX: -12

BI-187 (1-865-963-12)
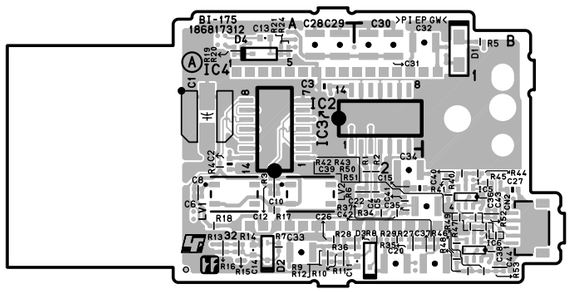
| | | | | | | | |
|---|---|---|---|---|---|---|---|
| C1 | A1 | CN1 | *A1 | R9 | A2 | R37 | B2 |
| C2 | A1 | CN2 | B2 | R10 | A2 | R38 | B2 |
| C3 | A2 | | | R11 | A2 | R39 | B2 |
| C4 | B2 | D1 | A2 | R12 | A2 | R40 | B2 |
| C5 | A2 | D2 | A2 | R13 | A2 | R41 | B2 |
| C6 | *A2 | D3 | B2 | R14 | A2 | | |
| C7 | A2 | D4 | A1 | R15 | A2 | *:B SIDE | |
| C8 | *A2 | D5 | *A1 | R16 | A2 | | |
| C9 | B2 | D6 | *A1 | R17 | A2 | | |
| C10 | A1 | | | R18 | A1 | | |
| C11 | A2 | IC1 | *A2 | R19 | A1 | | |
| C13 | *B2 | IC2 | A2 | R20 | A1 | | |
| C14 | *B2 | IC3 | *A1 | R21 | *A1 | | |
| C15 | *B2 | | | R22 | *A1 | | |
| C16 | *B2 | LV1 | A2 | R23 | A1 | | |
| C17 | B2 | | | R24 | *A1 | | |
| C19 | B2 | Q1 | *A1 | R25 | *A1 | | |
| C21 | B2 | Q2 | B2 | R26 | A2 | | |
| C22 | B1 | Q3 | B2 | R27 | B2 | | |
| C23 | A2 | | | R28 | B2 | | |
| C24 | B1 | R1 | A2 | R29 | B2 | | |
| C25 | A1 | R2 | B2 | R30 | *B2 | | |
| C26 | A1 | R3 | A2 | R31 | *B2 | | |
| C27 | B1 | R4 | A2 | R32 | *B2 | | |
| C28 | B1 | R5 | A2 | R33 | *B2 | | |
| C29 | B2 | R6 | A2 | R34 | B2 | | |
| C30 | B2 | R7 | B2 | R35 | B2 | | |
| C31 | *B2 | R8 | A2 | R36 | B2 | | |

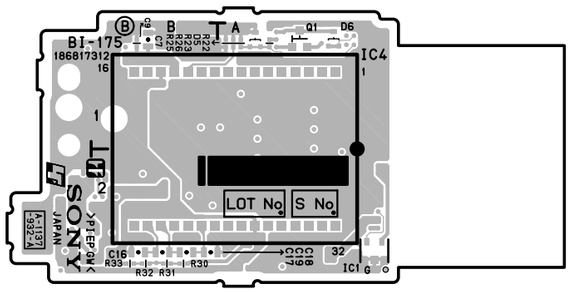


**BI-187** -A SIDE-
SUFFIX: -12




**BI-187** -B SIDE-
SUFFIX: -12

BI-188 (1-865-964-11)
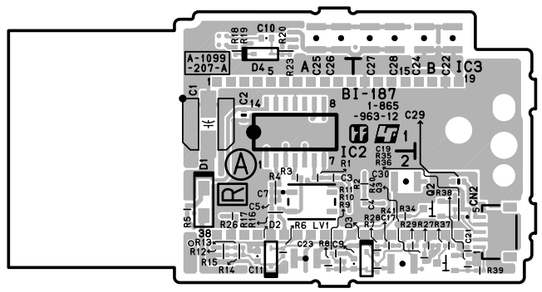
| | | | | | | | |
|---|---|---|---|---|---|---|---|
| C1 | A1 | CN1 | *A2 | R9 | A2 | R37 | B2 |
| C2 | A1 | CN2 | B2 | R10 | A2 | R38 | B2 |
| C3 | A2 | | | R11 | A2 | R39 | B2 |
| C4 | B2 | D1 | A2 | R12 | A2 | | |
| C5 | A2 | D2 | A2 | R13 | A2 | *:B SIDE | |
| C6 | *A2 | D3 | B2 | R14 | A2 | | |
| C7 | A2 | D4 | A1 | R15 | A2 | | |
| C8 | *A2 | D5 | *A1 | R16 | A2 | | |
| C9 | B2 | D6 | *A1 | R17 | A2 | | |
| C10 | A1 | | | R18 | A1 | | |
| C11 | A2 | IC1 | *A2 | R19 | A1 | | |
| C13 | *B2 | IC2 | A1 | R20 | A1 | | |
| C14 | *B2 | IC3 | *A2 | R21 | *A1 | | |
| C15 | *B2 | | | R22 | *A1 | | |
| C16 | *B2 | LV1 | A2 | R23 | A1 | | |
| C17 | B2 | | | R24 | *A1 | | |
| C19 | B2 | Q1 | *A1 | R25 | *A1 | | |
| C21 | B2 | Q2 | B2 | R26 | A2 | | |
| C22 | B1 | Q3 | B2 | R27 | B2 | | |
| C23 | A2 | | | R28 | B2 | | |
| C24 | B1 | R1 | A2 | R29 | B2 | | |
| C25 | A1 | R2 | B2 | R30 | *B2 | | |
| C26 | A1 | R3 | A2 | R31 | *B2 | | |
| C27 | B1 | R4 | A2 | R32 | *B2 | | |
| C28 | B1 | R5 | A2 | R33 | *B2 | | |
| C29 | B2 | R6 | A2 | R34 | B2 | | |
| C30 | B2 | R7 | B2 | R35 | B2 | | |
| C31 | *B2 | R8 | A2 | R36 | B2 | | |

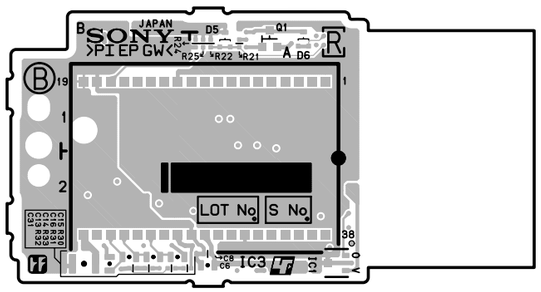


**BI-188** -A SIDE-
SUFFIX: -11




**BI-188** -B SIDE-
SUFFIX: -11

BI-189 (1-865-965-11)
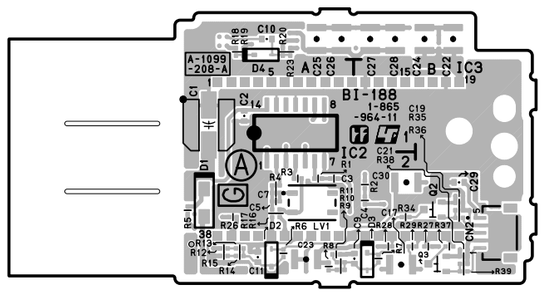
| | | | | | | | |
|---|---|---|---|---|---|---|---|
| C1 | A1 | CN1 | *A2 | R9 | A2 | R37 | B2 |
| C2 | A1 | CN2 | B2 | R10 | A2 | R38 | B2 |
| C3 | A2 | | | R11 | A2 | R39 | B2 |
| C4 | B2 | D1 | A2 | R12 | A2 | | |
| C5 | A2 | D2 | A2 | R13 | A2 | *:B SIDE | |
| C6 | *A2 | D3 | B2 | R14 | A2 | | |
| C7 | A2 | D4 | A1 | R15 | A2 | | |
| C8 | *A2 | D5 | *A1 | R16 | A2 | | |
| C9 | B2 | D6 | *A1 | R17 | A2 | | |
| C10 | A1 | | | R18 | A1 | | |
| C11 | A2 | IC1 | *A2 | R19 | A1 | | |
| C13 | *B2 | IC2 | A1 | R20 | A1 | | |
| C14 | *B2 | IC3 | *A2 | R21 | *A1 | | |
| C15 | *B2 | | | R22 | *A1 | | |
| C16 | *B2 | LV1 | A2 | R23 | A1 | | |
| C17 | B2 | | | R24 | *A1 | | |
| C19 | B2 | Q1 | *A1 | R25 | *A1 | | |
| C21 | B2 | Q2 | B2 | R26 | A2 | | |
| C22 | B1 | Q3 | B2 | R27 | B2 | | |
| C23 | A2 | | | R28 | B2 | | |
| C24 | B1 | R1 | A2 | R29 | B2 | | |
| C25 | A1 | R2 | B2 | R30 | *B2 | | |
| C26 | A1 | R3 | A2 | R31 | *B2 | | |
| C27 | B1 | R4 | A2 | R32 | *B2 | | |
| C28 | B1 | R5 | A2 | R33 | *B2 | | |
| C29 | B2 | R6 | A2 | R34 | B2 | | |
| C30 | B2 | R7 | B2 | R35 | B2 | | |
| C31 | *B2 | R8 | A2 | R36 | B2 | | |

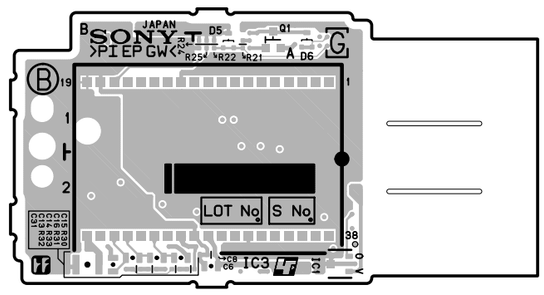


**BI-189** -A SIDE-
SUFFIX: -11




**BI-189** -B SIDE-
SUFFIX: -11

BI-188 (1-865-964-12)
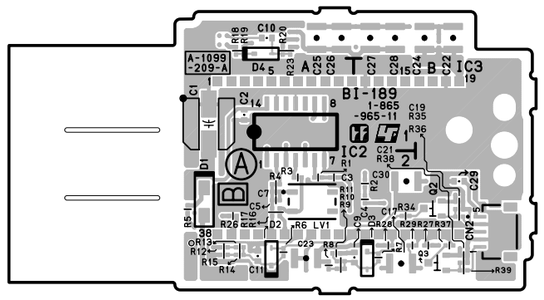
| | | | | | | | |
|---|---|---|---|---|---|---|---|
| C1 | A1 | CN1 | *A2 | R9 | A2 | R37 | B2 |
| C2 | A1 | CN2 | B2 | R10 | A2 | R38 | B2 |
| C3 | A2 | | | R11 | A2 | R39 | B2 |
| C4 | B2 | D1 | A2 | R12 | A2 | R40 | B2 |
| C5 | A2 | D2 | A2 | R13 | A2 | R41 | B2 |
| C6 | *A2 | D3 | B2 | R14 | A2 | | |
| C7 | A2 | D4 | A1 | R15 | A2 | *:B SIDE | |
| C8 | *A2 | D5 | *A1 | R16 | A2 | | |
| C9 | B2 | D6 | *A1 | R17 | A2 | | |
| C10 | A1 | | | R18 | A1 | | |
| C11 | A2 | IC1 | *A2 | R19 | A1 | | |
| C13 | *B2 | IC2 | A2 | R20 | A1 | | |
| C14 | *B2 | IC3 | *A1 | R21 | *A1 | | |
| C15 | *B2 | | | R22 | *A1 | | |
| C16 | *B2 | LV1 | A2 | R23 | A1 | | |
| C17 | B2 | | | R24 | *A1 | | |
| C19 | B2 | Q1 | *A1 | R25 | *A1 | | |
| C21 | B2 | Q2 | B2 | R26 | A2 | | |
| C22 | B1 | Q3 | B2 | R27 | B2 | | |
| C23 | A2 | | | R28 | B2 | | |
| C24 | B1 | R1 | A2 | R29 | B2 | | |
| C25 | A1 | R2 | B2 | R30 | *B2 | | |
| C26 | A1 | R3 | A2 | R31 | *B2 | | |
| C27 | B1 | R4 | A2 | R32 | *B2 | | |
| C28 | B1 | R5 | A2 | R33 | *B2 | | |
| C29 | B2 | R6 | A2 | R34 | B2 | | |
| C30 | B2 | R7 | B2 | R35 | B2 | | |
| C31 | *B2 | R8 | A2 | R36 | B2 | | |

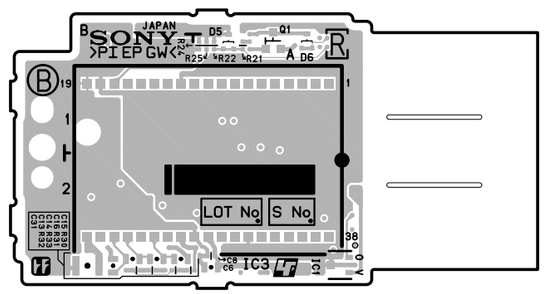


**BI-188** -A SIDE-
SUFFIX: -12




**BI-188** -B SIDE-
SUFFIX: -12

BI-189 (1-865-965-12)
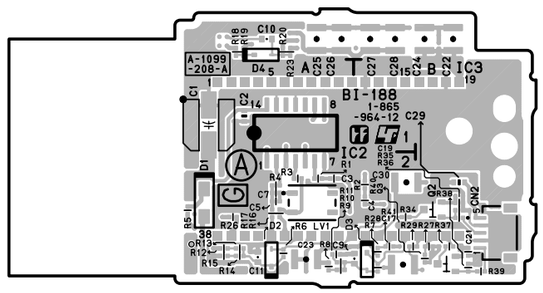
| | | | | | | | |
|---|---|---|---|---|---|---|---|
| C1 | A1 | CN1 | *A2 | R9 | A2 | R37 | B2 |
| C2 | A1 | CN2 | B2 | R10 | A2 | R38 | B2 |
| C3 | A2 | | | R11 | A2 | R39 | B2 |
| C4 | B2 | D1 | A2 | R12 | A2 | R40 | B2 |
| C5 | A2 | D2 | A2 | R13 | A2 | R41 | B2 |
| C6 | *A2 | D3 | B2 | R14 | A2 | | |
| C7 | A2 | D4 | A1 | R15 | A2 | *:B SIDE | |
| C8 | *A2 | D5 | *A1 | R16 | A2 | | |
| C9 | B2 | D6 | *A1 | R17 | A2 | | |
| C10 | A1 | | | R18 | A1 | | |
| C11 | A2 | IC1 | *A2 | R19 | A1 | | |
| C13 | *B2 | IC2 | A2 | R20 | A1 | | |
| C14 | *B2 | IC3 | *A1 | R21 | *A1 | | |
| C15 | *B2 | | | R22 | *A1 | | |
| C16 | *B2 | LV1 | A2 | R23 | A1 | | |
| C17 | B2 | | | R24 | *A1 | | |
| C19 | B2 | Q1 | *A1 | R25 | *A1 | | |
| C21 | B2 | Q2 | B2 | R26 | A2 | | |
| C22 | B1 | Q3 | B2 | R27 | B2 | | |
| C23 | A2 | | | R28 | B2 | | |
| C24 | B1 | R1 | A2 | R29 | B2 | | |
| C25 | A1 | R2 | B2 | R30 | *B2 | | |
| C26 | A1 | R3 | A2 | R31 | *B2 | | |
| C27 | B1 | R4 | A2 | R32 | *B2 | | |
| C28 | B1 | R5 | A2 | R33 | *B2 | | |
| C29 | B2 | R6 | A2 | R34 | B2 | | |
| C30 | B2 | R7 | B2 | R35 | B2 | | |
| C31 | *B2 | R8 | A2 | R36 | B2 | | |

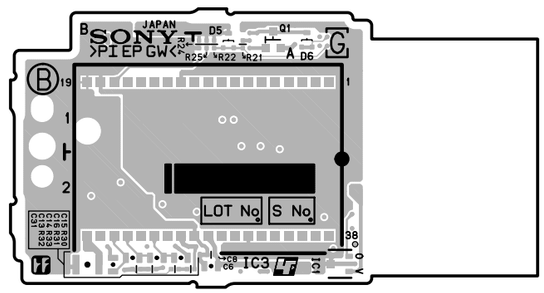


**BI-189** -A SIDE-
SUFFIX: -12




**BI-189** -B SIDE-
SUFFIX: -12

CN-2578, CN-2579, CN-2602, CN-2605

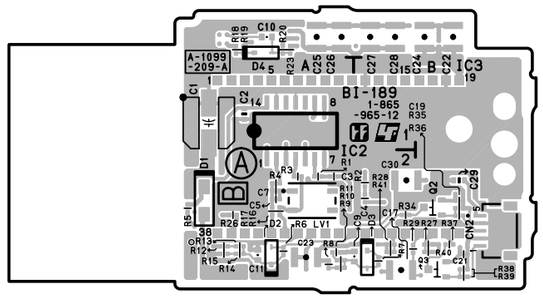CN-2578 (1-865-974-13)

| | | | | | |
|---|---|---|---|---|---|
| C1 | *A1 | IC11 | B1 | R31 | A1 |
| C2 | *A1 | IC12 | A1 | R32 | A1 |
| C3 | B2 | IC13 | A1 | R33 | B2 |
| C4 | *B1 | IC14 | A1 | R34 | B2 |
| C5 | A1 | | | R35 | B2 |
| C6 | B1 | L1 | *B1 | R36 | B2 |
| C7 | A1 | | | R37 | B1 |
| C8 | B1 | Q1 | A1 | R38 | B1 |
| C9 | A1 | Q2 | A1 | R39 | B1 |
| C10 | B1 | | | R40 | B1 |
| C11 | *A1 | R1 | B2 | R41 | A1 |
| C12 | *A1 | R2 | B2 | R42 | A1 |
| C13 | A1 | R3 | B2 | R43 | A1 |
| C14 | *A1 | R4 | B2 | R44 | A1 |
| C15 | B1 | R5 | B2 | | |
| C16 | B2 | R6 | B2 | *:B SIDE | |
| C17 | B2 | R7 | B2 | | |
| C18 | B2 | R8 | B2 | | |
| C19 | B1 | R9 | *B1 | | |
| C20 | B1 | R10 | B1 | | |
| C21 | B1 | R11 | B1 | | |
| C22 | A1 | R12 | B1 | | |
| C23 | A1 | R13 | B1 | | |
| C24 | A1 | R14 | B1 | | |
| | | R15 | B1 | | |
| CN1 | B1 | R16 | B1 | | |
| CN2 | B1 | R17 | B1 | | |
| CN3 | B2 | R18 | B1 | | |
| CN4 | A1 | R19 | A1 | | |
| | | R20 | A1 | | |
| IC1 | B2 | R21 | B1 | | |
| IC2 | A1 | R22 | B1 | | |
| IC3 | B1 | R23 | B1 | | |
| IC4 | A1 | R24 | B1 | | |
| IC5 | B1 | R25 | A1 | | |
| IC6 | B2 | R26 | A1 | | |
| IC7 | B2 | R27 | A1 | | |
| IC8 | B2 | R28 | A1 | | |
| IC9 | B1 | R29 | A1 | | |
| IC10 | B1 | R30 | A1 | | |

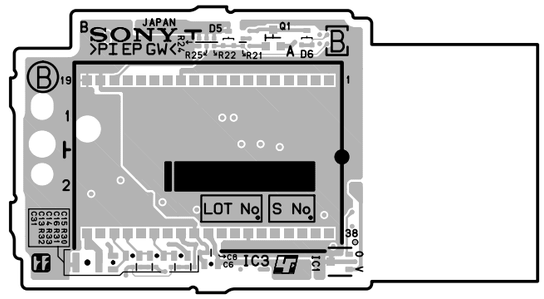


**CN-2578** -A SIDE-
SUFFIX: -13




**CN-2578** -B SIDE-
SUFFIX: -13

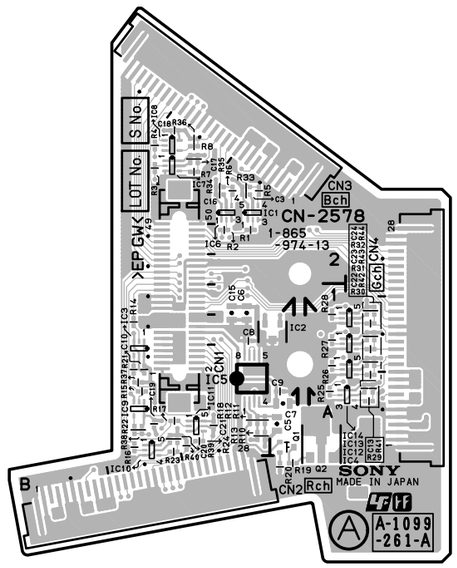


**CN-2602** -A SIDE-
SUFFIX: -11, 31

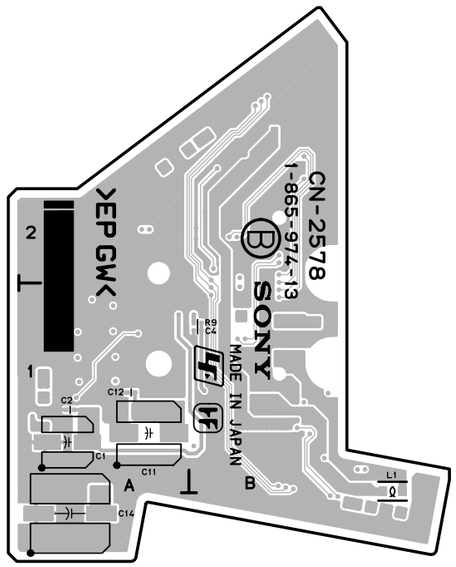


**CN-2602** -B SIDE-
SUFFIX: -11, 31




**CN-2605** -A SIDE-
SUFFIX: -11, 31




**CN-2605** -B SIDE-
SUFFIX: -11, 31




**CN-2579** -A SIDE-
SUFFIX: -12




**CN-2579** -B SIDE-
SUFFIX: -12

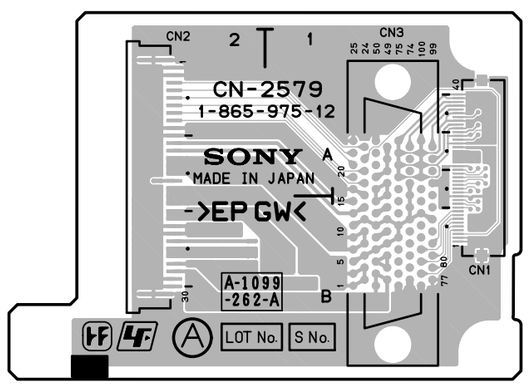


**CN-2579** -A SIDE-
SUFFIX: -21, 22

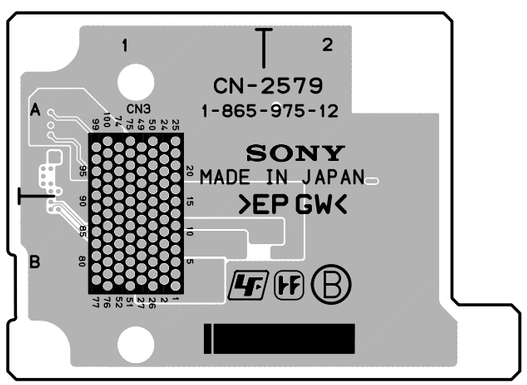


**CN-2579** -B SIDE-
SUFFIX: -21, 22

CN-2603 (1-867-456-11)
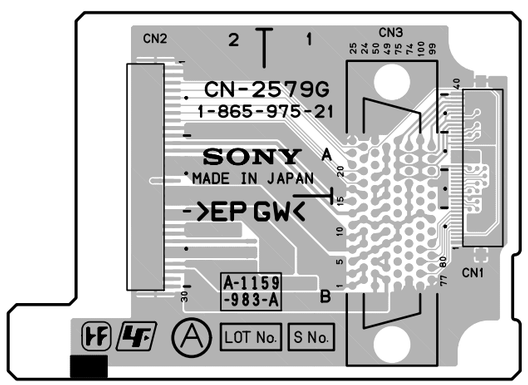
| | | | |
|---|---|---|---|
| C1 | A2 | JC1 | A1 |
| C2 | C2 | | |
| C3 | A2 | R1 | *A1 |
| C4 | C2 | R2 | *C1 |
| C5 | A2 | R3 | *A2 |
| C6 | C2 | R4 | *B2 |
| C7 | B2 | R5 | *B2 |
| C8 | B2 | R6 | *C2 |
| C9 | A1 | | |
| C10 | C1 | RV1 | A1 |
| C11 | A1 | RV2 | C1 |
| C12 | C1 | RV3 | A2 |
| C13 | A1 | RV4 | B2 |
| C14 | C1 | RV5 | B2 |
| C15 | A1 | RV6 | C2 |
| C16 | C1 | | |
| C17 | A1 | S1 | B1 |
| C18 | C1 | S2 | C1 |
| C19 | B1 | S3 | A1 |
| | | S4 | B1 |
| CN1 | *B1 | | |
| CN2 | A2 | *:B SIDE | |
| CN3 | C2 | | |

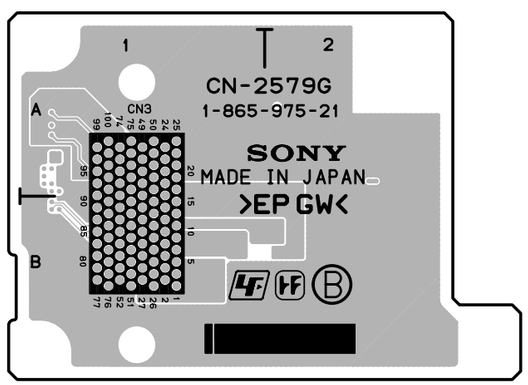


**CN-2603** -A SIDE-
SUFFIX: -11




**CN-2603** -B SIDE-
SUFFIX: -11

CN-2603 (1-867-456-12,31)
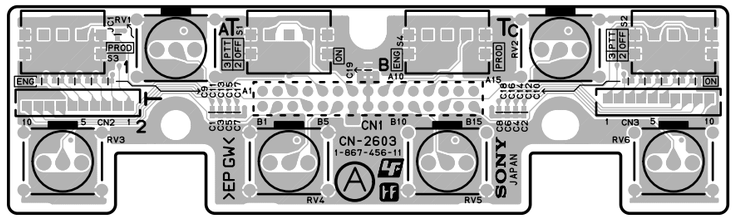
| | | | |
|---|---|---|---|
| C1 | A2 | R1 | *A1 |
| C2 | C2 | R2 | *C1 |
| C3 | A2 | R3 | *A2 |
| C4 | C2 | R4 | *B2 |
| C5 | A2 | R5 | *B2 |
| C6 | C2 | R6 | *C2 |
| C7 | B2 | R7 | *B1 |
| C8 | B2 | R8 | *C1 |
| C9 | A1 | R9 | *A2 |
| C10 | C1 | R10 | *A2 |
| C11 | A1 | | |
| C12 | C1 | RV1 | A1 |
| C13 | A1 | RV2 | C1 |
| C14 | C1 | RV3 | A2 |
| C15 | A1 | RV4 | B2 |
| C16 | C1 | RV5 | B2 |
| C17 | A1 | RV6 | C2 |
| C18 | C1 | | |
| C19 | B1 | S1 | B1 |
| | | S2 | C1 |
| CN1 | *B1 | S3 | A1 |
| CN2 | A2 | S4 | B1 |
| CN3 | C2 | | |
| | | *:B SIDE | |
| JC1 | A1 | | |

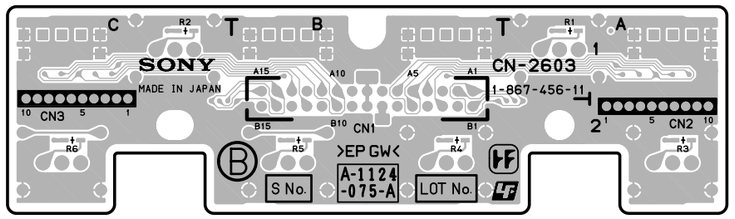


**CN-2603** -A SIDE-
SUFFIX: -12, 31




**CN-2603** -B SIDE-
SUFFIX: -12, 31

CN-2604, CN-2606

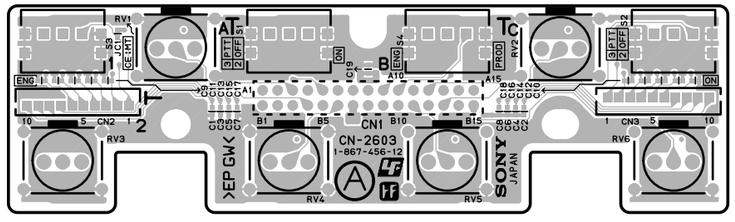CN-2604 (1-867-457-11)

| | | | | | |
|---|---|---|---|---|---|
| C1 | B1 | C20 | A2 | FB8 | A2 |
| C2 | B2 | C21 | A2 | FB9 | B2 |
| C3 | A1 | C22 | A2 | FB10 | B2 |
| C4 | B2 | C23 | A1 | FB11 | B1 |
| C5 | B2 | C24 | A1 | FB12 | B1 |
| C6 | B2 | | | FB13 | B1 |
| C7 | B2 | CN1 | A1 | FB14 | A1 |
| C8 | B2 | CN2 | *B2 | FB15 | A1 |
| C9 | B1 | CN3 | *B2 | | |
| C10 | B2 | CN4 | *A2 | SL1 | B1 |
| C11 | B2 | CN5 | *A2 | | |
| C12 | B2 | | | THP1 | B1 |
| C13 | B2 | FB1 | B1 | THP2 | B1 |
| C14 | B2 | FB2 | B2 | THP3 | A2 |
| C15 | B2 | FB3 | B2 | | |
| C16 | B1 | FB4 | A2 | *:B SIDE | |
| C17 | B2 | FB5 | B2 | | |
| C18 | B1 | FB6 | B2 | | |
| C19 | A1 | FB7 | B2 | | |

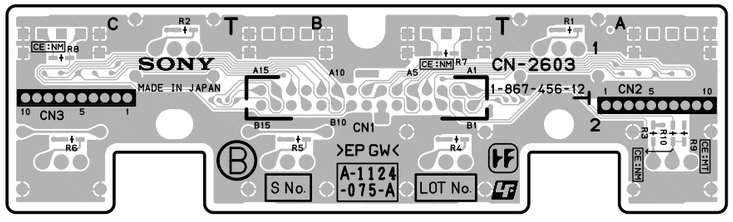


**CN-2604** -A SIDE-
SUFFIX: -11




**CN-2604** -B SIDE-
SUFFIX: -11

CN-2604 (1-867-457-12,31)
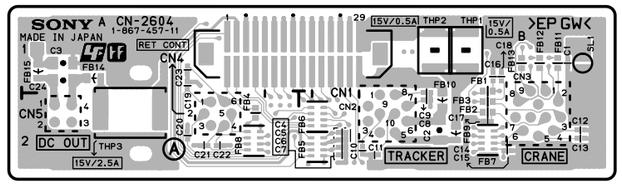
| | | | | | |
|---|---|---|---|---|---|
| C1 | B1 | C20 | A2 | FB7 | B2 |
| C2 | B2 | C21 | A2 | FB8 | A2 |
| C3 | A1 | C22 | A2 | FB9 | B2 |
| C4 | B2 | C23 | A1 | FB10 | B2 |
| C5 | B2 | C24 | A1 | FB11 | B1 |
| C6 | B2 | C25 | A2 | FB12 | B1 |
| C7 | B2 | | | FB13 | B1 |
| C8 | B2 | CN1 | A1 | FB14 | A1 |
| C9 | B1 | CN2 | *B2 | FB15 | A1 |
| C10 | B2 | CN3 | *B2 | | |
| C11 | B2 | CN4 | *A2 | SL1 | B1 |
| C12 | B2 | CN5 | *A2 | | |
| C13 | B2 | | | THP1 | B1 |
| C14 | B2 | FB1 | B1 | THP2 | B1 |
| C15 | B2 | FB2 | B2 | THP3 | A2 |
| C16 | B1 | FB3 | B2 | | |
| C17 | B2 | FB4 | A2 | *:B SIDE | |
| C18 | B1 | FB5 | B2 | | |
| C19 | A1 | FB6 | B2 | | |

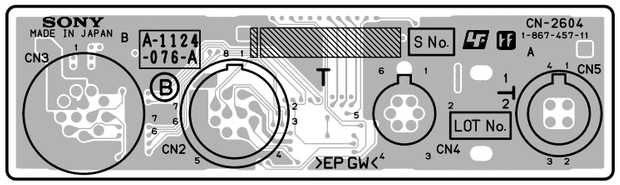


**CN-2604** -A SIDE-
SUFFIX: -12, 31




**CN-2604** -B SIDE-
SUFFIX: -12, 31

CN-2606 (1-867-459-11,31)
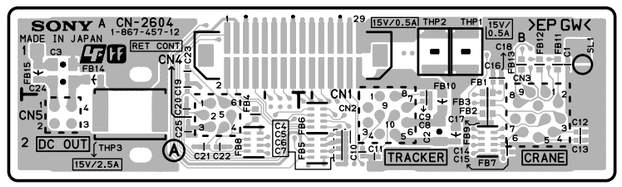
| | | | | | |
|---|---|---|---|---|---|
| C1 | *A1 | FL4 | C1 | R20 | *B1 |
| C2 | *A2 | FL5 | B1 | R21 | *A1 |
| C3 | *A1 | FL6 | C1 | R22 | *C1 |
| C4 | *C1 | | | R23 | *B1 |
| C5 | *C2 | R1 | *B1 | R24 | *C1 |
| C6 | *C1 | R2 | *B2 | | |
| | | R3 | *B1 | S1 | B2 |
| CN1 | B1 | R4 | *B2 | S2 | C2 |
| CN2 | A2 | R5 | *A1 | S3 | A2 |
| CN3 | C2 | R6 | *A2 | S4 | B2 |
| CN4 | A2 | R7 | *A1 | | |
| CN5 | C2 | R8 | *B2 | *:B SIDE | |
| | | R9 | *A1 | | |
| FB1 | *A1 | R10 | *A1 | | |
| FB2 | *A2 | R11 | *B1 | | |
| FB3 | *A1 | R12 | *B1 | | |
| FB4 | *C1 | R13 | *B1 | | |
| FB5 | *C2 | R14 | *C1 | | |
| FB6 | *C1 | R15 | *C1 | | |
| | | R16 | *B1 | | |
| FL1 | A1 | R17 | *C1 | | |
| FL2 | B1 | R18 | *C1 | | |
| FL3 | A1 | R19 | *A1 | | |

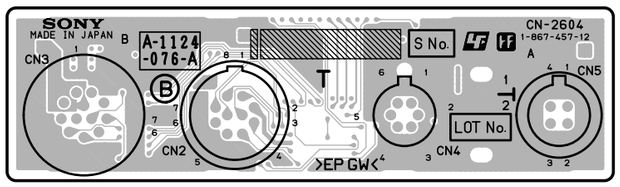


**CN-2606** -A SIDE-
SUFFIX: -11, 31




**CN-2606** -B SIDE-
SUFFIX: -11, 31

CN-2607, CN-2608, CN-2609

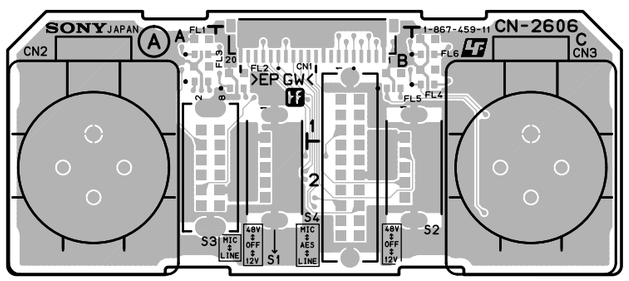


**CN-2607** -A SIDE-
SUFFIX: -11, 31

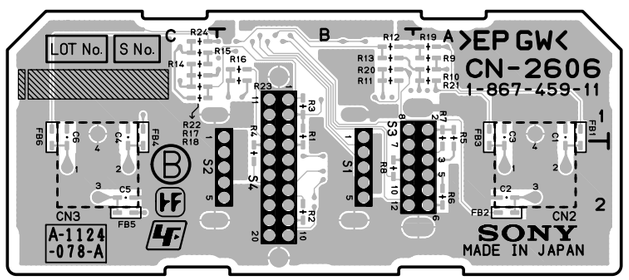


**CN-2607** -B SIDE-
SUFFIX: -11, 31

CN-2608 (1-867-408-11,31)
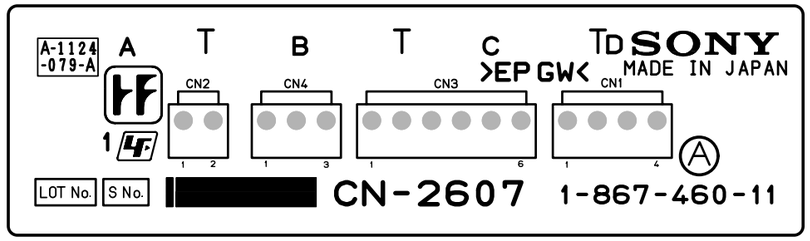
| | |
|---|---|
| C1 | *A2 |
| CN1 | B1 |
| CN2 | A2 |
| D1 | *B2 |
| Q1 | *B2 |
| Q2 | *B2 |
| R1 | *B2 |
| R2 | *B2 |

*:B SIDE

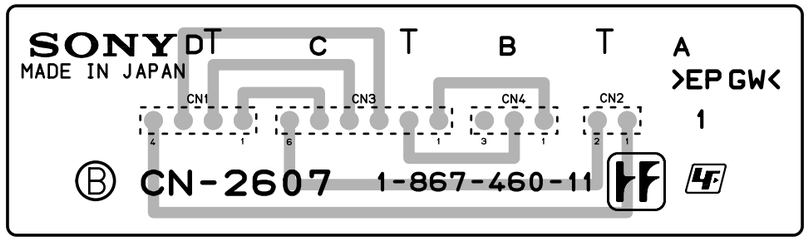


**CN-2608** -A SIDE-
SUFFIX: -11, 31




**CN-2608** -B SIDE-
SUFFIX: -11, 31

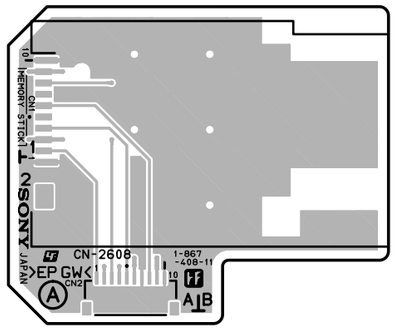


**CN-2609** -A SIDE-
SUFFIX: -11

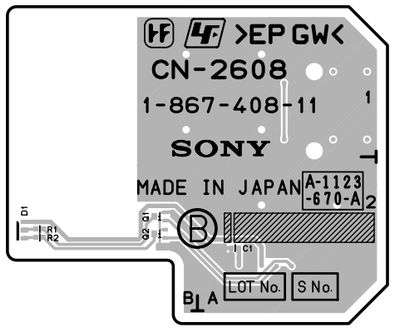


**CN-2609** -B SIDE-
SUFFIX: -11

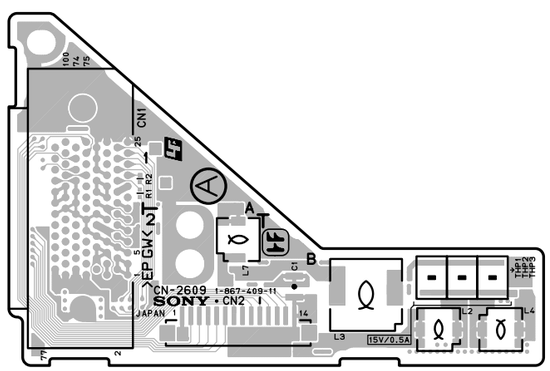


**CN-2609** -A SIDE-
SUFFIX: -21, 31

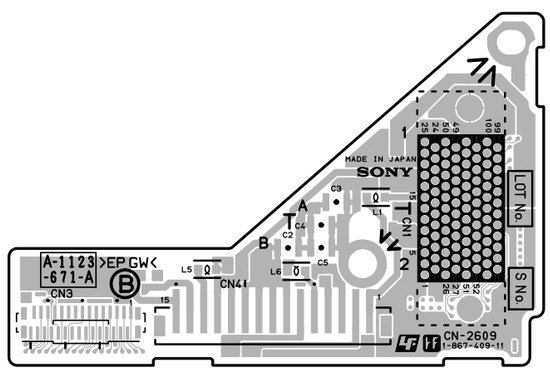


**CN-2609** -B SIDE-
SUFFIX: -21, 31


5-10

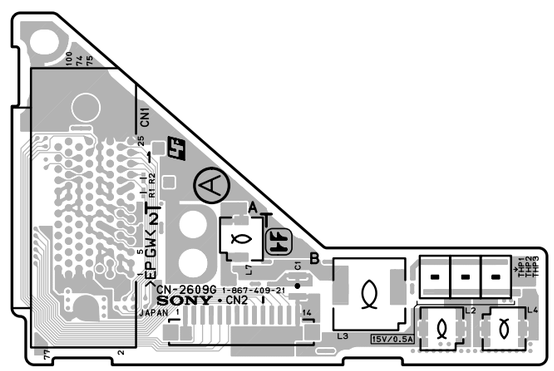


**CN-2614** -A SIDE-
SUFFIX: -12

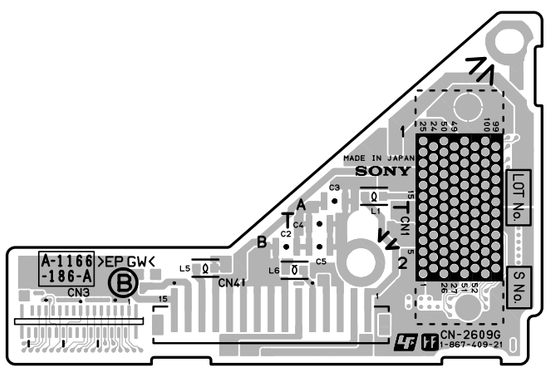


**CN-2614** -B SIDE-
SUFFIX: -12




**CN-2614B** -A SIDE-
SUFFIX: -11, 31




**CN-2614B** -B SIDE-
SUFFIX: -11, 31

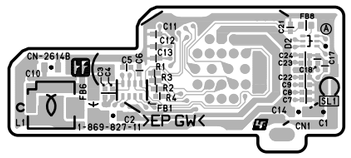


**CN-2615** -A SIDE-
SUFFIX: -12




**CN-2615** -B SIDE-
SUFFIX: -12




**CN-2615** -A SIDE-
SUFFIX: -13, 31




**CN-2615** -B SIDE-
SUFFIX: -13, 31




**CN-2616** -A SIDE-
SUFFIX: -12, 13, 31




**CN-2616** -B SIDE-
SUFFIX: -12, 13, 31

CN-2617 (1-865-938-13,31)

| | | | | | |
|---|---|---|---|---|---|
| C1 | *B2 | D6 | B1 | R11 | *B2 |
| C2 | *A1 | D7 | *B1 | R12 | A1 |
| C3 | *B2 | | | | |
| C4 | B1 | IC1 | *A2 | RB1 | *B1 |
| C5 | *B2 | IC2 | *A1 | RB2 | *A1 |
| C6 | *B2 | | | RB3 | *B1 |
| | | Q1 | *B1 | RB4 | *B2 |
| CN2 | *B1 | Q2 | *B1 | RB5 | *A2 |
| CN3 | *A2 | Q3 | A1 | RB6 | *A1 |
| CN4 | *B2 | Q4 | A1 | RB7 | *B1 |
| CN5 | *B2 | | | RB8 | *B2 |
| CN6 | B2 | R1 | *B1 | RB9 | *A1 |
| CN7 | *B2 | R2 | B1 | RB10 | *A1 |
| CN8 | *B1 | R3 | *B1 | RB11 | *A1 |
| CN9 | *B2 | R4 | *B1 | RB12 | *A1 |
| | | R5 | *B2 | RB13 | *A2 |
| D1 | *B1 | R6 | *B2 | RB14 | *B1 |
| D2 | *B1 | R7 | A1 | | |
| D3 | A1 | R8 | *A1 | SL1 | *B2 |
| D4 | *B1 | R9 | *A1 | | |
| D5 | *B1 | R10 | *B2 | *:B SIDE | |



CN-2614B, CN-2614, CN-2615, CN-2616, CN-2617, CN-2618




**CN-2618** -A SIDE-
SUFFIX: -12




**CN-2618** -B SIDE-
SUFFIX: -12




**CN-2618** -A SIDE-
SUFFIX: -13




**CN-2618** -B SIDE-
SUFFIX: -13




**CN-2618** -A SIDE-
SUFFIX: -14, 31




**CN-2618** -B SIDE-
SUFFIX: -14, 31




**CN-2617** -A SIDE-
SUFFIX: -13, 31




**CN-2617** -B SIDE-
SUFFIX: -13, 31

CN-2619 (1-865-940-12)
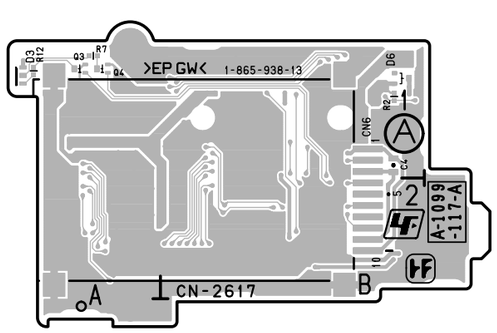
| | | | |
|---|---|---|---|
| C1 | *A2 | CN4 | A2 |
| C2 | *B2 | CN5 | B2 |
| C3 | *B2 | CN6 | A1 |
| C4 | *B2 | CN7 | *B1 |
| C5 | *A2 | CN8 | A2 |
| C6 | *A2 | | |
| C7 | *A2 | FB1 | *B2 |
| C8 | *A2 | FB2 | *B2 |
| C9 | *A1 | FB3 | *B1 |
| C10 | *A1 | FB4 | *A1 |
| C11 | *A1 | FB5 | A2 |
| C12 | *A1 | FB6 | *A2 |
| C13 | *B2 | FB7 | *A1 |
| C14 | *B2 | FB8 | *A2 |
| C15 | *B2 | FB9 | *A1 |
| C16 | *B2 | FB10 | *A2 |
| C17 | *B2 | FB11 | *A2 |
| C18 | *B2 | FB12 | *B1 |
| C19 | *B2 | FB13 | *B1 |
| C20 | *A1 | FB14 | *B1 |
| C21 | *A1 | FB15 | B1 |
| C22 | *A1 | FB16 | B1 |
| C23 | *A1 | FB17 | A2 |
| C24 | *A1 | FB18 | A2 |
| C25 | A2 | | |
| C26 | *A2 | S1 | B2 |
| C27 | *A1 | | |
| C28 | *B2 | SL1 | *A1 |
| C29 | *A1 | | |
| C30 | *A2 | THP1 | *A2 |
| | | THP2 | *A2 |
| CN1 | *B1 | | |
| CN2 | *A2 | *:B SIDE | |
| CN3 | *B1 | | |

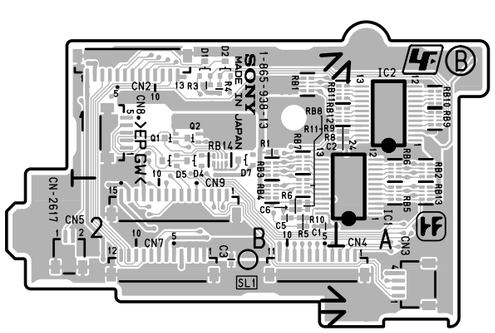


**CN-2619** -A SIDE-
SUFFIX: -12




**CN-2619** -B SIDE-
SUFFIX: -12

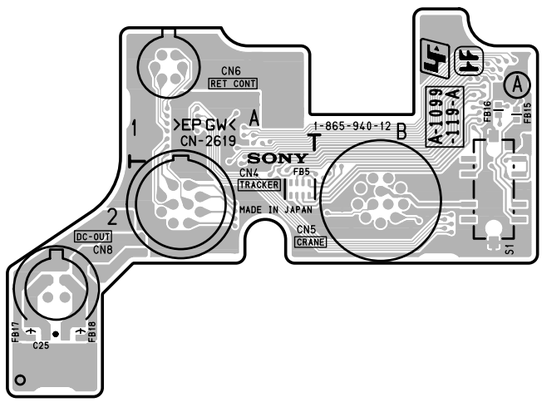


**CN-2620** -A SIDE-
SUFFIX: -12, 31

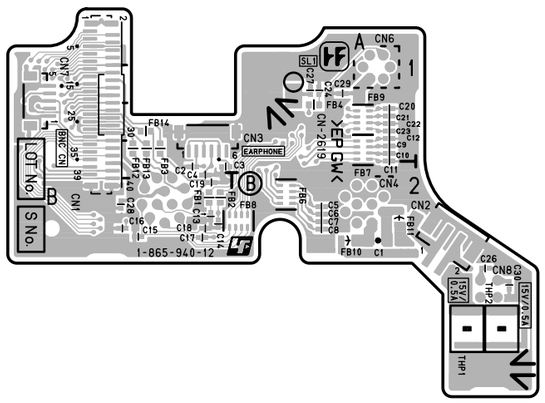


**CN-2620** -B SIDE-
SUFFIX: -12, 31

CN-2619 (1-865-940-21,31)

| | | | |
|---|---|---|---|
| C1 | *A2 | CN4 | A2 |
| C2 | *B2 | CN5 | B2 |
| C3 | *B2 | CN6 | A1 |
| C4 | *B2 | CN7 | *B1 |
| C5 | *A2 | CN8 | A2 |
| C6 | *A2 | | |
| C7 | *A2 | FB1 | *B2 |
| C8 | *A2 | FB2 | *B2 |
| C9 | *A1 | FB3 | *B1 |
| C10 | *A1 | FB4 | *A1 |
| C11 | *A2 | FB5 | A2 |
| C12 | *A1 | FB6 | *A2 |
| C13 | *B2 | FB7 | *A1 |
| C14 | *B2 | FB8 | *A2 |
| C15 | *B2 | FB9 | *A1 |
| C16 | *B2 | FB10 | *A2 |
| C17 | *B2 | FB11 | *A2 |
| C18 | *B2 | FB12 | *B1 |
| C19 | *B2 | FB13 | *B1 |
| C20 | *A1 | FB14 | *B1 |
| C21 | *A1 | FB15 | B1 |
| C22 | *A1 | FB16 | B1 |
| C23 | *A1 | FB17 | A2 |
| C24 | *A1 | FB18 | A2 |
| C25 | A2 | | |
| C26 | *A2 | S1 | B2 |
| C27 | *A1 | | |
| C28 | *B2 | SL1 | *A1 |
| C29 | *A1 | | |
| C30 | *A2 | THP1 | *A2 |
| | | THP2 | *A2 |
| CN1 | *B1 | | |
| CN2 | *A2 | *:B SIDE | |
| CN3 | *B1 | | |




**CN-2619** -A SIDE-
SUFFIX: -21, 31




**CN-2619** -B SIDE-
SUFFIX: -21, 31

CN-2621 (1-865-942-13)
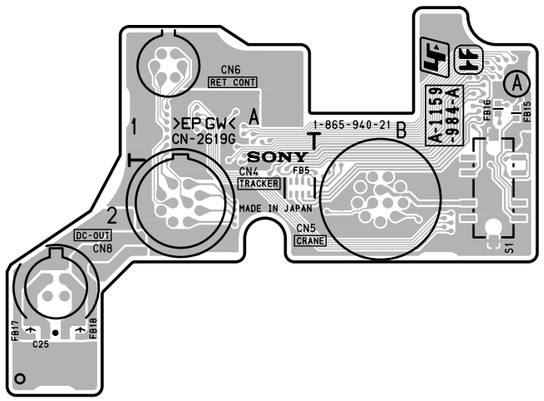
| | | | | | |
|---|---|---|---|---|---|
| C1 | A1 | FB4 | A1 | R15 | *A2 |
| C2 | B1 | FB5 | A1 | R16 | *B2 |
| C3 | *B2 | FB6 | *A2 | R17 | *B2 |
| C4 | *B2 | FB7 | *A2 | R18 | *B2 |
| C5 | *B2 | FB8 | *A2 | R19 | *B2 |
| C6 | *B2 | FB9 | *B2 | R20 | *B2 |
| C7 | A1 | FB10 | *B2 | R21 | *A2 |
| C8 | A1 | FB11 | *B2 | R22 | *A2 |
| C9 | *A2 | FB12 | *A1 | R23 | *A2 |
| C10 | *A2 | | | R24 | *B2 |
| C11 | *A2 | FL1 | *A2 | R25 | *B2 |
| C12 | *B2 | FL2 | *A2 | R26 | *B2 |
| C13 | *B2 | FL3 | *A2 | R27 | A1 |
| C14 | *B2 | FL4 | *B2 | R28 | *B2 |
| C15 | A1 | FL5 | *B2 | R29 | *A1 |
| C16 | A1 | FL6 | *B2 | R30 | *A1 |
| C17 | A1 | | | R31 | *A1 |
| C18 | A1 | IC1 | A1 | | |
| C19 | *A1 | | | RB1 | *A1 |
| C20 | *A1 | L1 | A1 | RB2 | A1 |
| C21 | *A1 | L2 | A1 | RB3 | A1 |
| | | | | RB4 | A1 |
| CN1 | *A1 | R1 | *A1 | RB5 | A1 |
| CN2 | B1 | R2 | *A1 | RB6 | A1 |
| CN3 | B2 | R3 | *A2 | RB7 | A1 |
| CN4 | A2 | R4 | *A2 | RB8 | A1 |
| CN5 | B2 | R5 | *A2 | | |
| CN6 | A2 | R6 | *A2 | S1 | A1 |
| CN7 | B2 | R7 | *B2 | S2 | B1 |
| | | R8 | *B2 | S3 | A1 |
| D1 | *A1 | R9 | *B2 | | |
| D2 | *A1 | R10 | *B2 | SL1 | A1 |
| | | R11 | *A2 | | |
| FB1 | *B2 | R12 | *A2 | *:B SIDE | |
| FB2 | A1 | R13 | *A2 | | |
| FB3 | A1 | R14 | *A2 | | |

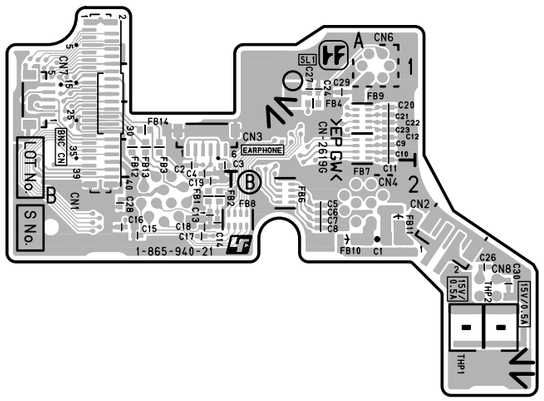


**CN-2621** -A SIDE-
SUFFIX: -13




**CN-2621** -B SIDE-
SUFFIX: -13

CN-2621 (1-865-942-21)
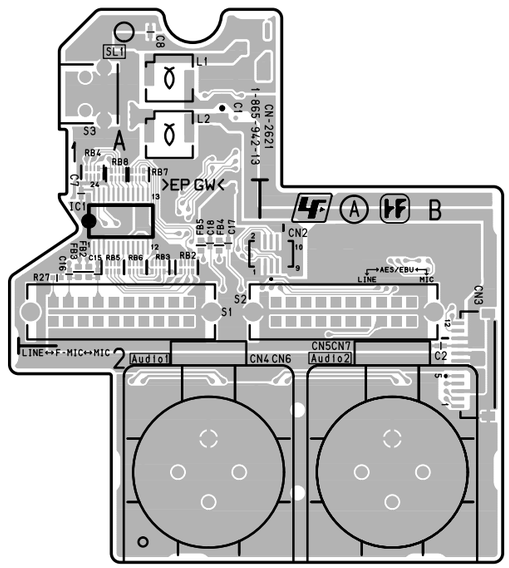
| | | | | | |
|---|---|---|---|---|---|
| C1 | A1 | FB4 | A1 | R15 | *A2 |
| C2 | B2 | FB5 | A1 | R16 | *B2 |
| C3 | *B2 | FB6 | *A2 | R17 | *B2 |
| C4 | *B2 | FB7 | *A2 | R18 | *B2 |
| C5 | *B2 | FB8 | *A2 | R19 | *B2 |
| C6 | *B2 | FB9 | *B2 | R20 | *B2 |
| C7 | A1 | FB10 | *B2 | R21 | *A2 |
| C8 | A1 | FB11 | *B2 | R22 | *A2 |
| C9 | *A2 | FB12 | *A1 | R23 | *A2 |
| C10 | *A2 | | | R24 | *B2 |
| C11 | *A2 | FL1 | *A2 | R25 | *B2 |
| C12 | *B2 | FL2 | *A2 | R26 | *B2 |
| C13 | *B2 | FL3 | *A2 | R27 | A1 |
| C14 | *B2 | FL4 | *B2 | R28 | *B2 |
| C15 | A1 | FL5 | *B2 | R29 | *A1 |
| C16 | A1 | FL6 | *B2 | R30 | *A1 |
| C17 | A1 | | | R31 | *A1 |
| C18 | A1 | IC1 | A1 | | |
| C19 | *A1 | | | RB1 | *A1 |
| C20 | *A1 | L1 | A1 | RB2 | A1 |
| C21 | *A1 | L2 | A1 | RB3 | A1 |
| | | | | RB4 | A1 |
| CN1 | *A1 | R1 | *A1 | RB5 | A1 |
| CN2 | B1 | R2 | *A1 | RB6 | A1 |
| CN3 | B2 | R3 | *A2 | RB7 | A1 |
| CN4 | A2 | R4 | *A2 | RB8 | A1 |
| CN5 | B2 | R5 | *A2 | | |
| CN6 | A2 | R6 | *A2 | S1 | A1 |
| CN7 | B2 | R7 | *B2 | S2 | B1 |
| | | R8 | *B2 | S3 | A1 |
| D1 | *A1 | R9 | *B2 | | |
| D2 | *A1 | R10 | *B2 | SL1 | A1 |
| | | R11 | *A2 | | |
| FB1 | *B2 | R12 | *A2 | *:B SIDE | |
| FB2 | A1 | R13 | *A2 | | |
| FB3 | A1 | R14 | *A2 | | |

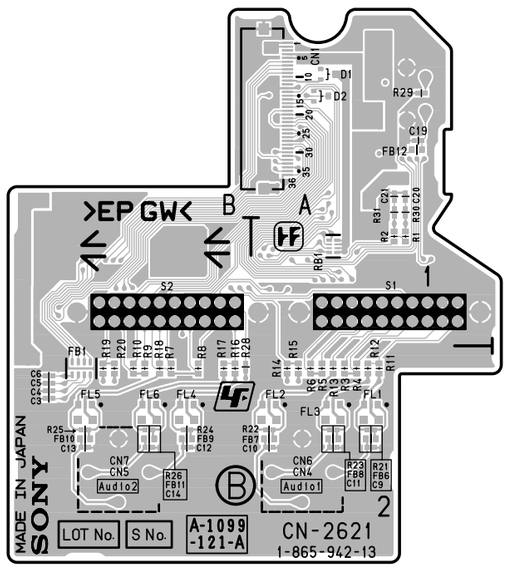


**CN-2621** -A SIDE-
SUFFIX: -21




**CN-2621** -B SIDE-
SUFFIX: -21

CN-2621 (1-865-942-22,31)
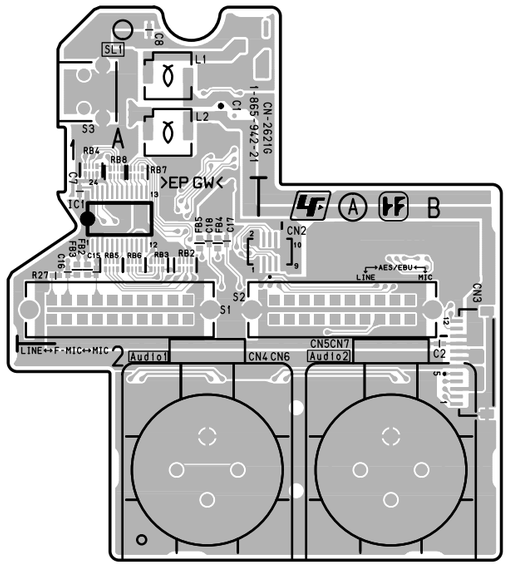
| | | | | | |
|---|---|---|---|---|---|
| C1 | A1 | JC1 | *A2 | R28 | *B2 |
| C2 | B1 | JC2 | *B2 | R29 | *A1 |
| C3 | *B2 | JC3 | *B2 | R30 | *A1 |
| C4 | *B2 | JC4 | *A2 | R31 | *A1 |
| C5 | *B2 | JC5 | *A2 | | |
| C6 | *B2 | JC6 | *A2 | RB1 | *A1 |
| C7 | A1 | JC7 | *A2 | RB2 | A1 |
| C8 | A1 | JC8 | *A2 | RB3 | A1 |
| C9 | *A2 | JC9 | *B2 | RB4 | A1 |
| C12 | *B2 | JC10 | *A2 | RB5 | A1 |
| C15 | A1 | JC11 | *A2 | RB6 | A1 |
| C16 | A1 | JC12 | *A2 | RB7 | A1 |
| C17 | A1 | JC13 | *A2 | RB8 | A1 |
| C18 | A1 | JC14 | *A2 | | |
| C19 | *A1 | JC15 | A1 | S1 | A1 |
| C20 | *A1 | | | S2 | B1 |
| C21 | *A1 | L1 | A1 | S3 | A1 |
| C22 | A1 | L2 | A1 | | |
| C23 | B1 | L3 | *A2 | *:B SIDE | |
| | | L4 | *B2 | | |
| CN1 | *A1 | | | | |
| CN2 | B1 | R1 | *A1 | | |
| CN3 | B2 | R2 | *A1 | | |
| CN4 | A2 | R3 | *A2 | | |
| CN5 | B2 | R4 | *A2 | | |
| CN6 | A2 | R5 | *A2 | | |
| CN7 | B2 | R6 | *A2 | | |
| CN8 | *B2 | R7 | *B2 | | |
| | | R8 | *B2 | | |
| D1 | *A1 | R9 | *B2 | | |
| D2 | *A1 | R10 | *B2 | | |
| | | R11 | *A2 | | |
| FB1 | *B2 | R12 | *A2 | | |
| FB2 | A1 | R13 | *A2 | | |
| FB3 | A1 | R14 | *A2 | | |
| | | R15 | *A2 | | |
| FL1 | *A1 | R16 | *B2 | | |
| FL2 | *B1 | R17 | *B2 | | |
| FL3 | *B1 | R18 | *B2 | | |
| | | R19 | *B2 | | |
| IC1 | A1 | R20 | *B2 | | |
| | | R27 | A1 | | |

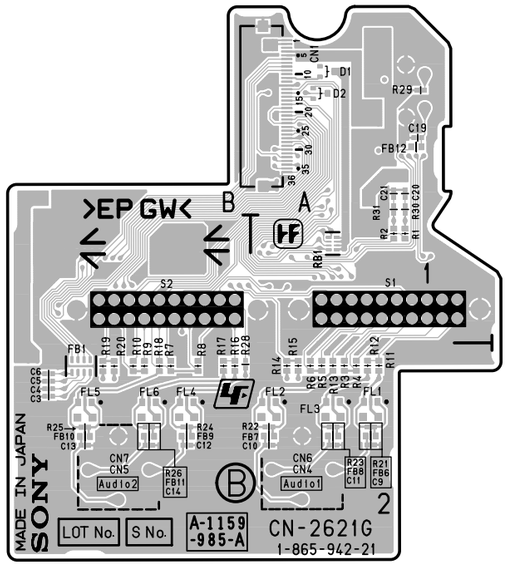


**CN-2621** -A SIDE-
SUFFIX: -22, 31




**CN-2621** -B SIDE-
SUFFIX: -22, 31

**CN-2622** -A SIDE-
SUFFIX: -13, 31

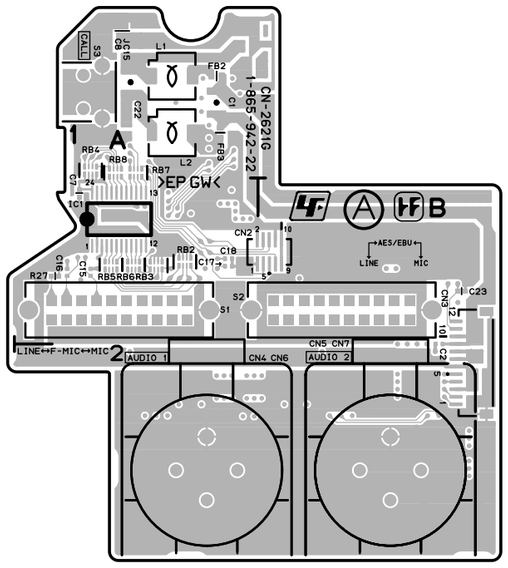**CN-2622** -B SIDE-
SUFFIX: -13, 31



**CN-2623** -A SIDE-
SUFFIX: -13, 31

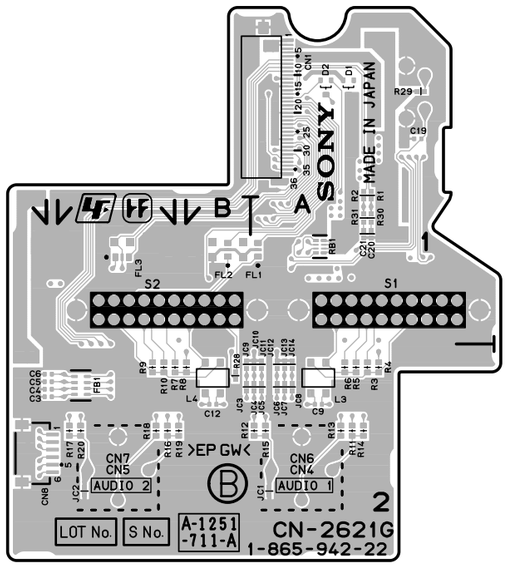

**CN-2623** -B SIDE-
SUFFIX: -13, 31



**CN-2640** -A SIDE-
SUFFIX: -12, 31



**CN-2640** -B SIDE-
SUFFIX: -12, 31



**CN-2671** -A SIDE-
SUFFIX: -11, 31



**CN-2671** -B SIDE-
SUFFIX: -11, 31

CN-2712 (1-865-962-11)

| | | | | | |
|---|---|---|---|---|---|
| C1 | *A1 | IC9 | B1 | R27 | A1 |
| C2 | B2 | IC10 | B1 | R28 | A1 |
| C3 | *A1 | IC11 | A1 | R29 | A1 |
| C4 | A1 | IC12 | A1 | R30 | A1 |
| C5 | A1 | IC13 | A1 | R31 | A1 |
| C6 | A1 | IC14 | A1 | R32 | A1 |
| C7 | A1 | | | R33 | B2 |
| C8 | B1 | L1 | *B1 | R34 | A2 |
| C9 | A1 | | | R35 | B2 |
| C10 | A1 | Q1 | A1 | R36 | B2 |
| C11 | *A1 | Q2 | A1 | R37 | B1 |
| C12 | *B1 | | | R38 | B1 |
| C13 | A1 | R1 | B2 | R39 | B1 |
| C14 | *A1 | R2 | A2 | R40 | A1 |
| C15 | B1 | R3 | B2 | R41 | A1 |
| C16 | A2 | R4 | B2 | R42 | A1 |
| C17 | B2 | R5 | B2 | R43 | A1 |
| C18 | B2 | R6 | A2 | R44 | A1 |
| C19 | B1 | R7 | B2 | | |
| C20 | B1 | R8 | B2 | *:B SIDE | |
| C21 | A1 | R9 | A1 | | |
| C22 | A1 | R10 | B1 | | |
| C23 | A1 | R11 | B1 | | |
| C24 | A1 | R12 | B1 | | |
| | | R13 | A1 | | |
| CN1 | B1 | R14 | A1 | | |
| CN2 | B1 | R15 | A1 | | |
| CN3 | B2 | R16 | A1 | | |
| CN4 | A1 | R17 | A1 | | |
| | | R18 | B1 | | |
| IC1 | B2 | R19 | B1 | | |
| IC2 | A1 | R20 | B1 | | |
| IC3 | B1 | R21 | A1 | | |
| IC4 | A1 | R22 | A1 | | |
| IC5 | A1 | R23 | A1 | | |
| IC6 | A2 | R24 | A1 | | |
| IC7 | B2 | R25 | A1 | | |
| IC8 | B2 | R26 | A1 | | |



**CN-2712** -A SIDE-
SUFFIX: -11



**CN-2712** -B SIDE-
SUFFIX: -11



**CN-2723** -A SIDE-
SUFFIX: -11



**CN-2723** -B SIDE-
SUFFIX: -11



**CN-2723** -A SIDE-
SUFFIX: -21

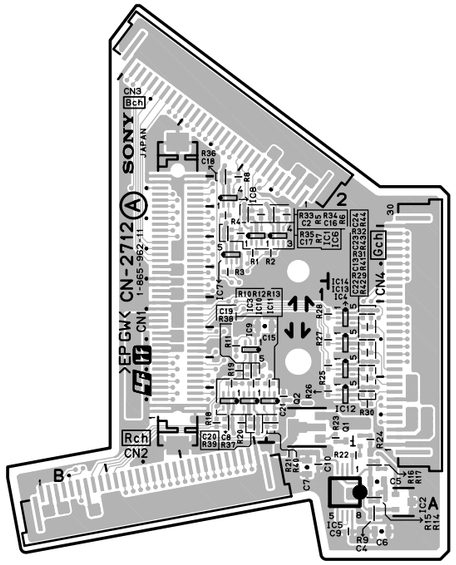

**CN-2723** -B SIDE-
SUFFIX: -21

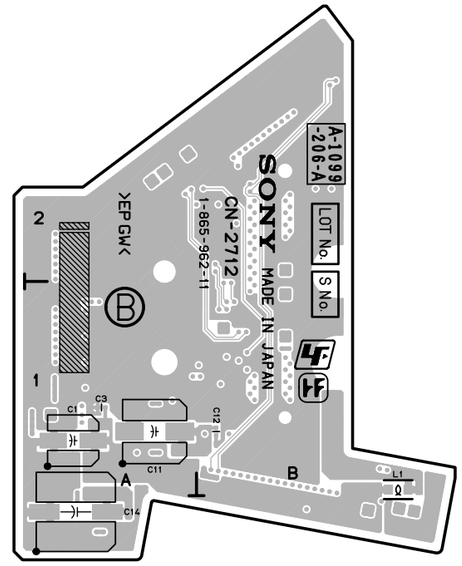DAP-33 (1-865-932-12)
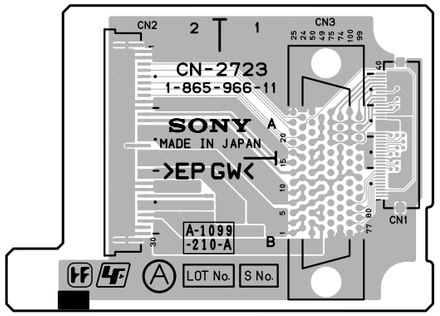
| | | | | | | | |
|---|---|---|---|---|---|---|---|
| BT1 | A1 | C225 | *D2 | C404 | *B1 | D451 | *A1 |
| | | C226 | *D2 | C405 | *B1 | D452 | *A1 |
| C1 | E3 | C227 | *D2 | C406 | *B1 | D453 | *A2 |
| C2 | E3 | C228 | *D2 | C407 | *B1 | D454 | *A2 |
| C3 | *E3 | C230 | *D2 | C408 | *B2 | D455 | *A3 |
| C4 | E3 | C231 | *D2 | C409 | *B2 | | |
| C5 | E3 | C232 | *D2 | C410 | B2 | E1 | B2 |
| C6 | E3 | C234 | *D2 | C411 | B2 | E2 | *B2 |
| C7 | E3 | C235 | *D2 | C412 | *B2 | | |
| C8 | *E3 | C236 | *D2 | C413 | *A2 | FB2 | D2 |
| C10 | E3 | C237 | *D2 | C414 | *B2 | FB3 | D2 |
| C11 | *D1 | C238 | *D2 | C415 | *B2 | | |
| C12 | *D1 | C239 | *D2 | C416 | B2 | IC1 | E3 |
| C13 | *D1 | C241 | *D2 | C417 | B2 | IC2 | A2 |
| C21 | *A3 | C242 | *D2 | C418 | *B2 | IC3 | A2 |
| C22 | *A3 | C243 | *D2 | C419 | *B2 | IC4 | D3 |
| C23 | *A3 | C245 | *D1 | C420 | *B2 | IC11 | *D1 |
| C24 | *A3 | C246 | *D1 | C421 | *A2 | IC61 | C1 |
| C25 | A3 | C247 | *D1 | C422 | B2 | IC62 | C1 |
| C26 | *A3 | C248 | *D1 | C423 | *B3 | IC63 | C1 |
| C27 | A3 | C249 | *E1 | C424 | *B2 | IC64 | C1 |
| C28 | *A2 | C250 | *D1 | C425 | *B3 | IC75 | E2 |
| C29 | *A2 | C251 | *D2 | C426 | *B3 | IC81 | *B1 |
| C30 | A2 | C252 | *D2 | C427 | B3 | IC82 | E2 |
| C31 | A3 | C253 | *D2 | C428 | B3 | IC83 | *E2 |
| C32 | *A2 | C258 | *D2 | C429 | *B3 | IC84 | *E2 |
| C33 | *A2 | C271 | *C2 | C430 | B2 | IC201 | D2 |
| C34 | A2 | C272 | *C2 | C451 | *A1 | IC202 | D1 |
| C35 | A2 | C273 | C2 | C452 | *A2 | IC203 | *C1 |
| C36 | A1 | C274 | C2 | C453 | *A1 | IC205 | *C2 |
| C37 | *A2 | C275 | *C2 | C454 | *A1 | IC207 | *D3 |
| C38 | A3 | C276 | *C2 | C455 | *A1 | IC211 | E1 |
| C39 | *B3 | C277 | C2 | C456 | *A1 | IC212 | E1 |
| C41 | *D3 | C278 | C2 | C457 | *A1 | IC213 | D1 |
| C42 | D3 | C279 | *C3 | C458 | *A2 | IC214 | E1 |
| C43 | D3 | C280 | *C2 | C459 | *A2 | IC271 | C2 |
| C44 | D3 | C281 | C2 | C460 | A2 | IC272 | C3 |
| C45 | D3 | C282 | C2 | C461 | A2 | IC273 | C3 |
| C46 | *D3 | C283 | C2 | C462 | A2 | IC274 | *C1 |
| C47 | *E3 | C284 | C2 | C463 | A2 | IC275 | *C1 |
| C48 | *D3 | C285 | D3 | C464 | *A2 | IC276 | *C2 |
| C49 | *D3 | C286 | C3 | C465 | *A2 | IC301 | C2 |
| C50 | E3 | C287 | *C3 | C466 | *A2 | IC302 | C3 |
| C51 | *D3 | C288 | *C3 | C467 | *A2 | IC303 | C3 |
| C52 | E3 | C289 | C1 | C468 | *A2 | IC304 | C3 |
| C53 | E2 | C290 | C1 | C469 | *A2 | IC305 | *C3 |
| C54 | E1 | C291 | C2 | C470 | *A2 | IC306 | *C3 |
| C55 | *E2 | C301 | C2 | C471 | *A2 | IC351 | *B1 |
| C56 | *E2 | C302 | *C2 | C472 | A2 | IC352 | B2 |
| C58 | *E1 | C303 | *C2 | C473 | *A2 | IC353 | B2 |
| C59 | E1 | C304 | C2 | C474 | A3 | IC354 | B2 |
| C60 | E2 | C305 | *C2 | C475 | A3 | IC355 | *B3 |
| C61 | *E2 | C306 | C2 | C476 | *A3 | IC356 | *B3 |
| C62 | *E2 | C307 | *C2 | C477 | *A3 | IC401 | *B1 |
| C63 | *E2 | C308 | C2 | | | IC402 | B2 |
| C64 | *E2 | C309 | C2 | CL1 | E3 | IC403 | B2 |
| C65 | *C1 | C310 | *C3 | CL2 | A2 | IC404 | B2 |
| C66 | *C1 | C311 | *C3 | CL3 | A2 | IC405 | *B2 |
| C67 | *C1 | C312 | *C3 | CL4 | E3 | IC451 | *A1 |
| C68 | *C1 | C313 | *C2 | CL15 | E2 | IC452 | *A3 |
| C69 | *C1 | C314 | C2 | CL16 | E2 | IC453 | A2 |
| C70 | *C1 | C315 | C2 | CL17 | E2 | IC454 | A2 |
| C71 | *C1 | C316 | C3 | CL18 | E2 | IC455 | A2 |
| C72 | *C1 | C317 | C3 | | | IC456 | A2 |
| C74 | B1 | C318 | C3 | CN1 | C3 | IC457 | *B2 |
| C75 | *B1 | C319 | C3 | CN2 | D1 | IC458 | *B2 |
| C76 | *C1 | C320 | C3 | | | | |
| C77 | *C1 | C321 | *C3 | D1 | *E3 | L1 | E3 |
| C201 | *E1 | C351 | *B2 | D2 | *A3 | L2 | *B3 |
| C202 | *E1 | C352 | *B1 | D3 | A3 | L3 | *A3 |
| C203 | *D1 | C353 | *B1 | D52 | *B1 | L4 | A3 |
| C204 | *E1 | C354 | *B1 | D53 | *A1 | L6 | D3 |
| C205 | *E1 | C355 | *B1 | D271 | *C2 | L7 | *D3 |
| C206 | *E1 | C356 | *B1 | D272 | *C2 | L8 | *A2 |
| C207 | *E1 | C357 | *B1 | D273 | *C2 | L9 | A2 |
| C208 | *E1 | C358 | *B2 | D274 | *C2 | L52 | *E1 |
| C209 | *E1 | C359 | *B2 | D275 | *D3 | L201 | *E1 |
| C210 | *E1 | C360 | B2 | D276 | *C3 | L202 | *E1 |
| C211 | *E1 | C361 | B2 | D277 | *C3 | L203 | *D1 |
| C212 | *D1 | C362 | B2 | D278 | *C3 | L204 | *D1 |
| C213 | *E1 | C363 | B2 | D301 | *C2 | L205 | *D1 |
| C214 | *E1 | C364 | *B2 | D302 | *C2 | L206 | *D1 |
| C215 | *E1 | C365 | *B2 | D303 | *C3 | L252 | *C2 |
| C216 | *E1 | C366 | *B2 | D304 | *C3 | L301 | *C2 |
| C217 | *D2 | C367 | *B2 | D351 | *B1 | L351 | *B1 |
| C218 | *C1 | C368 | *B2 | D352 | *B1 | L401 | *A1 |
| C219 | *C1 | C369 | *B2 | D353 | *B2 | L402 | *B3 |
| C220 | *D1 | C370 | *B2 | D354 | *B2 | L451 | *A1 |
| C221 | *D1 | C371 | *B3 | D401 | *A1 | | |
| C222 | *C1 | C401 | *B1 | D402 | *A1 | Q1 | *E3 |
| C223 | C1 | C402 | *B1 | D403 | *B2 | Q2 | *A3 |
| C224 | *D1 | C403 | *B2 | D404 | *B2 | Q3 | A3 |

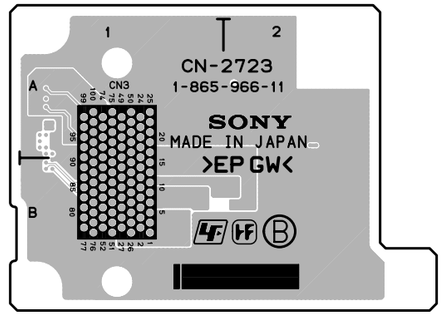


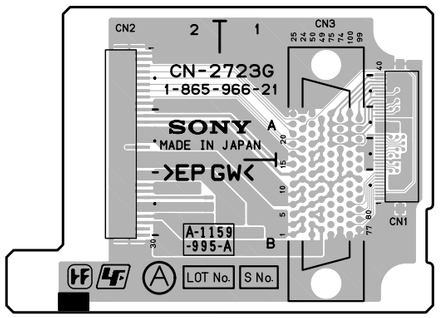**DAP-33** -A SIDE-
SUFFIX: -12

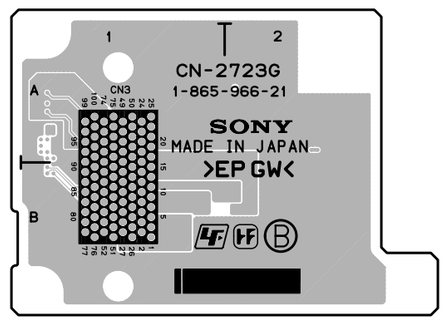


**DAP-33** -B SIDE-
SUFFIX: -12

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| Q11 | C1 | R215 | *D1 | R319 | *C3 | RB51 | *E2 |
| Q12 | C1 | R216 | *E1 | R320 | *C3 | RB201 | *D3 |
| Q13 | C1 | R217 | *E1 | R321 | C2 | RB202 | *D3 |
| Q401 | B2 | R218 | *D1 | R322 | C2 | RB203 | *D2 |
| Q403 | *A3 | R219 | *D1 | R351 | *B1 | RB204 | *D1 |
| Q404 | *A3 | R220 | *A3 | R352 | *B1 | RB205 | *D1 |
| | | R221 | *A3 | R353 | *B2 | RB206 | *D1 |
| R3 | *E3 | R222 | *E1 | R354 | *B2 | RB207 | *D1 |
| R4 | E3 | R223 | *E1 | R355 | *B2 | RB210 | *E2 |
| R5 | E3 | R224 | *D1 | R356 | *B2 | RB271 | *C2 |
| R6 | E3 | R225 | *E1 | R357 | *B2 | RB272 | *C2 |
| R7 | E3 | R226 | *E1 | R358 | *B2 | RB273 | *C2 |
| R8 | E3 | R227 | *E1 | R359 | *B2 | RB274 | *C2 |
| R11 | *D1 | R228 | *E1 | R360 | *B2 | | |
| R12 | *D1 | R229 | *D1 | R361 | *B2 | X1 | E1 |
| R13 | *D1 | R230 | *E1 | R362 | *B2 | X2 | E1 |
| R21 | *A3 | R231 | *E1 | R363 | *B2 | | |
| R22 | A3 | R232 | *E1 | R364 | *B2 | *:B SIDE | |
| R23 | *A2 | R233 | *E1 | R365 | *B2 | | |
| R24 | *A2 | R234 | *E1 | R366 | *B2 | | |
| R25 | A2 | R235 | *E1 | R368 | *B2 | | |
| R26 | *A3 | R236 | E1 | R369 | *B3 | | |
| R27 | A3 | R237 | E1 | R370 | *B3 | | |
| R28 | A2 | R238 | *D1 | R371 | *B2 | | |
| R31 | *C1 | R239 | *D1 | R372 | *B1 | | |
| R32 | *C1 | R240 | *C2 | R401 | *A1 | | |
| R33 | *C1 | R241 | *D1 | R402 | *B1 | | |
| R34 | *C1 | R242 | *D1 | R403 | *B2 | | |
| R41 | D3 | R243 | *D2 | R404 | *B2 | | |
| R44 | D3 | R244 | *C2 | R405 | *B2 | | |
| R45 | *A2 | R245 | *D3 | R406 | *B2 | | |
| R47 | *D3 | R246 | *D3 | R407 | *B2 | | |
| R48 | *D3 | R247 | *D2 | R408 | *B2 | | |
| R49 | *D3 | R248 | *D2 | R409 | *B2 | | |
| R50 | *D3 | R249 | *E2 | R410 | *A2 | | |
| R51 | *D3 | R250 | *E2 | R411 | *B2 | | |
| R54 | E2 | R251 | *D2 | R412 | *B2 | | |
| R55 | E2 | R252 | *D2 | R413 | *B2 | | |
| R56 | E2 | R253 | *D2 | R414 | *A2 | | |
| R57 | E2 | R254 | *D2 | R415 | B2 | | |
| R60 | E2 | R255 | *D2 | R416 | *B2 | | |
| R61 | E2 | R256 | *D2 | R417 | *B2 | | |
| R62 | *E2 | R257 | *D2 | R418 | *B2 | | |
| R63 | *E2 | R258 | *D2 | R419 | *B2 | | |
| R64 | *E2 | R259 | *D2 | R420 | *B2 | | |
| R65 | *E2 | R260 | *E2 | R421 | *B2 | | |
| R66 | *E2 | R261 | *E2 | R423 | *B2 | | |
| R67 | *E2 | R262 | *E2 | R424 | *B3 | | |
| R68 | *C1 | R263 | *E2 | R425 | *B3 | | |
| R69 | *C1 | R264 | *D1 | R426 | *B2 | | |
| R70 | *C1 | R265 | *D1 | R427 | *B1 | | |
| R71 | *C1 | R266 | *D1 | R451 | *A1 | | |
| R72 | *C1 | R267 | *C1 | R452 | *A1 | | |
| R73 | *C1 | R268 | *C1 | R453 | *A2 | | |
| R74 | *B1 | R269 | *D3 | R454 | *A2 | | |
| R75 | *A1 | R270 | *D2 | R455 | *A2 | | |
| R76 | *A1 | R271 | *C2 | R456 | *A2 | | |
| R77 | *A1 | R272 | C2 | R457 | *A2 | | |
| R78 | *B1 | R273 | C2 | R458 | *A2 | | |
| R79 | *B1 | R274 | C2 | R459 | *A2 | | |
| R80 | *B1 | R275 | C2 | R460 | *A2 | | |
| R81 | *B1 | R276 | C2 | R461 | *A2 | | |
| R82 | *B1 | R277 | C2 | R462 | *A2 | | |
| R83 | *A1 | R278 | C2 | R463 | *A2 | | |
| R84 | C1 | R279 | D3 | R464 | *A2 | | |
| R85 | C1 | R280 | C3 | R465 | *A2 | | |
| R86 | C1 | R281 | C3 | R466 | *A2 | | |
| R87 | *A1 | R282 | C3 | R467 | *A2 | | |
| R88 | *C1 | R283 | C3 | R468 | *A2 | | |
| R89 | *C1 | R284 | C3 | R469 | *A3 | | |
| R90 | *C1 | R285 | C3 | R470 | A3 | | |
| R91 | *C1 | R286 | C3 | R471 | *A3 | | |
| R92 | E2 | R287 | C2 | R472 | A3 | | |
| R93 | E2 | R291 | C2 | R473 | *A2 | | |
| R94 | E2 | R292 | C2 | R474 | *A2 | | |
| R95 | E2 | R301 | C2 | R475 | *A3 | | |
| R96 | E2 | R302 | *C2 | R476 | A3 | | |
| R97 | E2 | R303 | C2 | R477 | *A3 | | |
| R201 | *E1 | R304 | C2 | R478 | A3 | | |
| R202 | *E1 | R305 | C2 | R479 | *A2 | | |
| R203 | *E1 | R306 | C2 | R480 | *A2 | | |
| R204 | *E1 | R307 | C2 | R481 | *A3 | | |
| R205 | *E1 | R308 | C2 | R482 | *A3 | | |
| R206 | *E1 | R309 | *C3 | R484 | *A3 | | |
| R207 | *E1 | R310 | *C3 | R486 | *A3 | | |
| R208 | *E1 | R311 | C2 | R487 | *A3 | | |
| R209 | *D1 | R312 | C3 | R488 | *A3 | | |
| R210 | *D1 | R313 | C3 | R489 | *A3 | | |
| R211 | *D1 | R314 | C2 | R490 | *A2 | | |
| R212 | *E2 | R315 | C3 | R491 | *A1 | | |
| R213 | *D3 | R316 | C3 | R492 | *A3 | | |
| R214 | *D2 | R318 | C3 | R493 | A3 | | |

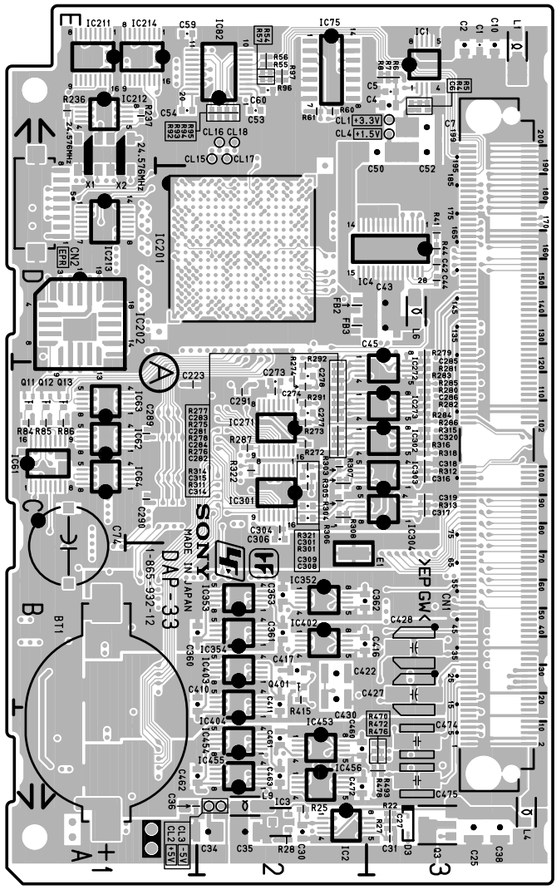DAP-33 (1-865-932-13,31)

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| BT1 | A1 | C225 | *D2 | C404 | *B1 | D451 | *A1 |
| | | C226 | *D2 | C405 | *B1 | D452 | *A1 |
| C1 | E3 | C227 | *D2 | C406 | *B1 | D453 | *A2 |
| C2 | E3 | C228 | *D2 | C407 | *B1 | D454 | *A2 |
| C3 | *E3 | C230 | *D2 | C408 | *B2 | D455 | *A3 |
| C4 | E3 | C231 | *D2 | C409 | *B2 | | |
| C5 | E3 | C232 | *D2 | C410 | B2 | E1 | B2 |
| C6 | E3 | C234 | *D2 | C411 | B2 | E2 | *B2 |
| C7 | E3 | C235 | *D2 | C412 | *B2 | | |
| C8 | *E3 | C236 | *D2 | C413 | *A2 | FB2 | D2 |
| C10 | E3 | C237 | *D2 | C414 | *B2 | FB3 | D2 |
| C11 | *D1 | C238 | *D2 | C415 | *B2 | | |
| C12 | *D1 | C239 | *D2 | C416 | B2 | IC1 | E3 |
| C13 | *D1 | C241 | *D2 | C417 | B2 | IC2 | A2 |
| C21 | *A3 | C242 | *D2 | C418 | *B2 | IC3 | A2 |
| C22 | *A3 | C243 | *D2 | C419 | *B2 | IC4 | D3 |
| C23 | *A3 | C245 | *D1 | C420 | *B2 | IC11 | *D1 |
| C24 | *A3 | C246 | *D1 | C421 | *A2 | IC61 | C1 |
| C25 | A3 | C247 | *D1 | C422 | B2 | IC62 | C1 |
| C26 | *A3 | C248 | *D1 | C423 | *B3 | IC63 | C1 |
| C27 | A3 | C249 | *E1 | C424 | *B2 | IC64 | C1 |
| C28 | *A2 | C250 | *D1 | C425 | *B3 | IC75 | E2 |
| C29 | *A2 | C251 | *D2 | C426 | *B3 | IC81 | *B1 |
| C30 | A2 | C252 | *D2 | C427 | B3 | IC82 | E2 |
| C31 | A3 | C253 | *D2 | C428 | B3 | IC83 | *E2 |
| C32 | *A2 | C258 | *D2 | C429 | *B3 | IC84 | *E2 |
| C33 | *A2 | C271 | *C2 | C430 | B2 | IC201 | D2 |
| C34 | A2 | C272 | *C2 | C451 | *A1 | IC202 | D1 |
| C35 | A2 | C273 | C2 | C452 | *A2 | IC203 | *C1 |
| C36 | A1 | C274 | C2 | C453 | *A1 | IC205 | *C2 |
| C37 | *A2 | C275 | *C2 | C454 | *A1 | IC207 | *D3 |
| C38 | A3 | C276 | *C2 | C455 | *A1 | IC211 | E1 |
| C39 | *B3 | C277 | C2 | C456 | *A1 | IC212 | E1 |
| C41 | *D3 | C278 | C2 | C457 | *A1 | IC213 | D1 |
| C42 | D3 | C279 | *C3 | C458 | *A2 | IC214 | E1 |
| C43 | D3 | C280 | *C2 | C459 | *A2 | IC271 | C2 |
| C44 | D3 | C281 | C2 | C460 | A2 | IC272 | C3 |
| C45 | D3 | C282 | C2 | C461 | A2 | IC273 | C3 |
| C46 | *D3 | C283 | C2 | C462 | A2 | IC274 | *C1 |
| C47 | *E3 | C284 | C2 | C463 | A2 | IC275 | *C1 |
| C48 | *D3 | C285 | D3 | C464 | *A2 | IC276 | *C2 |
| C49 | *D3 | C286 | C3 | C465 | *A2 | IC301 | C2 |
| C50 | E3 | C287 | *C3 | C466 | *A2 | IC302 | C3 |
| C51 | *D3 | C288 | *C3 | C467 | *A2 | IC303 | C3 |
| C52 | E3 | C289 | C1 | C468 | *A2 | IC304 | C3 |
| C53 | E2 | C290 | C1 | C469 | *A2 | IC305 | *C3 |
| C54 | E1 | C291 | C2 | C470 | *A2 | IC306 | *C3 |
| C55 | *E2 | C301 | C2 | C471 | *A2 | IC351 | *B1 |
| C56 | *E2 | C302 | *C2 | C472 | A2 | IC352 | B2 |
| C58 | *E1 | C303 | *C2 | C473 | *A2 | IC353 | B2 |
| C59 | E1 | C304 | C2 | C474 | A3 | IC354 | B2 |
| C60 | E2 | C305 | *C2 | C475 | A3 | IC355 | *B3 |
| C61 | *E2 | C306 | C2 | C476 | *A3 | IC356 | *B3 |
| C62 | *E2 | C307 | *C2 | C477 | *A3 | IC401 | *B1 |
| C63 | *E2 | C308 | C2 | | | IC402 | B2 |
| C64 | *E2 | C309 | C2 | CL1 | E3 | IC403 | B2 |
| C65 | *C1 | C310 | *C3 | CL2 | A2 | IC404 | B2 |
| C66 | *C1 | C311 | *C3 | CL3 | A2 | IC405 | *B2 |
| C67 | *C1 | C312 | *C3 | CL4 | E3 | IC451 | *A1 |
| C68 | *C1 | C313 | *C2 | CL15 | E2 | IC452 | *A3 |
| C69 | *C1 | C314 | C2 | CL16 | E2 | IC453 | A2 |
| C70 | *C1 | C315 | C2 | CL17 | E2 | IC454 | A2 |
| C71 | *C1 | C316 | C3 | CL18 | E2 | IC455 | A2 |
| C72 | *C1 | C317 | C3 | | | IC456 | A2 |
| C74 | B1 | C318 | C3 | CN1 | C3 | IC457 | *B2 |
| C75 | *B1 | C319 | C3 | CN2 | D1 | IC458 | *B2 |
| C76 | *C1 | C320 | C3 | | | | |
| C77 | *C1 | C321 | *C3 | D1 | *E3 | L1 | E3 |
| C201 | *E1 | C351 | *B2 | D2 | *A3 | L2 | *B3 |
| C202 | *E1 | C352 | *B1 | D3 | A3 | L3 | *A3 |
| C203 | *D1 | C353 | *B1 | D52 | *B1 | L4 | A3 |
| C204 | *E1 | C354 | *B1 | D53 | *A1 | L6 | D3 |
| C205 | *E1 | C355 | *B1 | D271 | *C2 | L7 | *D3 |
| C206 | *E1 | C356 | *B1 | D272 | *C2 | L8 | *A2 |
| C207 | *E1 | C357 | *B1 | D273 | *C2 | L9 | A2 |
| C208 | *E1 | C358 | *B2 | D274 | *C2 | L52 | *E1 |
| C209 | *E1 | C359 | *B2 | D275 | *D3 | L201 | *E1 |
| C210 | *E1 | C360 | B2 | D276 | *C3 | L202 | *E1 |
| C211 | *E1 | C361 | B2 | D277 | *C3 | L203 | *D1 |
| C212 | *D1 | C362 | B2 | D278 | *C3 | L204 | *D1 |
| C213 | *E1 | C363 | B2 | D301 | *C2 | L205 | *D1 |
| C214 | *E1 | C364 | *B2 | D302 | *C2 | L206 | *D1 |
| C215 | *E1 | C365 | *B2 | D303 | *C3 | L252 | *C2 |
| C216 | *E1 | C366 | *B2 | D304 | *C3 | L301 | *C2 |
| C217 | *D2 | C367 | *B2 | D351 | *B1 | L351 | *B1 |
| C218 | *C1 | C368 | *B2 | D352 | *B1 | L401 | *A1 |
| C219 | *C1 | C369 | *B2 | D353 | *B2 | L402 | *B3 |
| C220 | *D1 | C370 | *B2 | D354 | *B2 | L451 | *A1 |
| C221 | *D1 | C371 | *B3 | D401 | *A1 | | |
| C222 | *C1 | C401 | *B1 | D402 | *A1 | Q1 | *E3 |
| C223 | C1 | C402 | *B1 | D403 | *B2 | Q2 | *A3 |
| C224 | *D1 | C403 | *B2 | D404 | *B2 | Q3 | A3 |

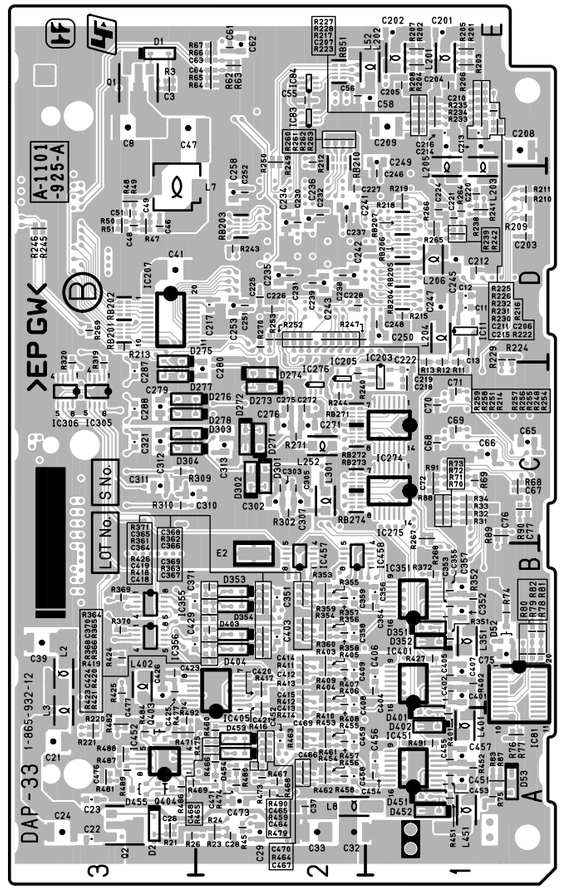


**DAP-33** -A SIDE-
SUFFIX: -13, 31




**DAP-33** -B SIDE-
SUFFIX: -13, 31

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| Q11 | C1 | R214 | *D2 | R318 | C3 | R493 | A3 |
| Q12 | C1 | R215 | *D1 | R319 | *C3 | R494 | *A2 |
| Q13 | C1 | R216 | *E1 | R320 | *C3 | R495 | *A2 |
| Q401 | B2 | R217 | *E1 | R321 | C2 | | |
| Q403 | *A3 | R218 | *D1 | R322 | C2 | RB51 | *E2 |
| Q404 | *A3 | R219 | *D1 | R351 | *B1 | RB201 | *D3 |
| | | R220 | *A3 | R352 | *B1 | RB202 | *D3 |
| R3 | *E3 | R221 | *A3 | R353 | *B2 | RB203 | *D2 |
| R4 | E3 | R222 | *E1 | R354 | *B2 | RB204 | *D1 |
| R5 | E3 | R223 | *E1 | R355 | *B2 | RB205 | *D1 |
| R6 | E3 | R224 | *D1 | R356 | *B2 | RB206 | *D1 |
| R7 | E3 | R225 | *E1 | R357 | *B2 | RB207 | *D1 |
| R8 | E3 | R226 | *E1 | R358 | *B2 | RB210 | *E2 |
| R11 | *C1 | R227 | *E1 | R359 | *B2 | RB271 | *C2 |
| R12 | *C1 | R228 | *E1 | R360 | *B2 | RB272 | *C2 |
| R13 | *C1 | R229 | *D1 | R361 | *B2 | RB273 | *C2 |
| R21 | *A3 | R230 | *E1 | R362 | *B2 | RB274 | *C2 |
| R22 | A3 | R231 | *E1 | R363 | *B2 | | |
| R23 | *A2 | R232 | *E1 | R364 | *B2 | X1 | E1 |
| R24 | *A2 | R233 | *E1 | R365 | *B2 | X2 | E1 |
| R25 | A2 | R234 | *E1 | R366 | *B2 | | |
| R26 | *A3 | R235 | *E1 | R368 | *B2 | *:B SIDE | |
| R27 | A3 | R236 | E1 | R369 | *B3 | | |
| R28 | A2 | R237 | E1 | R370 | *B3 | | |
| R31 | *C1 | R238 | *D1 | R371 | *B2 | | |
| R32 | *C1 | R239 | *D1 | R372 | *B1 | | |
| R33 | *C1 | R240 | *C2 | R401 | *A1 | | |
| R34 | *C1 | R241 | *D1 | R402 | *B1 | | |
| R41 | D3 | R242 | *D1 | R403 | *B2 | | |
| R44 | D3 | R243 | *D2 | R404 | *B2 | | |
| R45 | *A2 | R244 | *C2 | R405 | *B2 | | |
| R47 | *D3 | R245 | *D3 | R406 | *B2 | | |
| R48 | *D3 | R246 | *D3 | R407 | *B2 | | |
| R49 | *D3 | R247 | *D2 | R408 | *B2 | | |
| R50 | *D3 | R248 | *D2 | R409 | *B2 | | |
| R51 | *D3 | R249 | *E2 | R410 | *A2 | | |
| R54 | E2 | R250 | *E2 | R411 | *B2 | | |
| R55 | E2 | R251 | *D2 | R412 | *B2 | | |
| R56 | E2 | R252 | *D2 | R413 | *B2 | | |
| R57 | E2 | R253 | *D2 | R414 | *A2 | | |
| R60 | E2 | R254 | *D2 | R415 | B2 | | |
| R61 | E2 | R255 | *D2 | R416 | *B2 | | |
| R62 | *E2 | R256 | *D2 | R417 | *B2 | | |
| R63 | *E2 | R257 | *D2 | R418 | *B2 | | |
| R64 | *E2 | R258 | *D2 | R419 | *B2 | | |
| R65 | *E2 | R259 | *D2 | R420 | *B2 | | |
| R66 | *E2 | R260 | *E2 | R421 | *B2 | | |
| R67 | *E2 | R261 | *E2 | R423 | *B2 | | |
| R68 | *C1 | R262 | *E2 | R424 | *B3 | | |
| R69 | *C1 | R263 | *E2 | R425 | *B3 | | |
| R70 | *C1 | R264 | *D1 | R426 | *B2 | | |
| R71 | *C1 | R265 | *D1 | R427 | *B1 | | |
| R72 | *C1 | R266 | *D1 | R451 | *A1 | | |
| R73 | *C1 | R267 | *C1 | R452 | *A1 | | |
| R74 | *B1 | R268 | *C1 | R453 | *A2 | | |
| R75 | *A1 | R269 | *D3 | R454 | *A2 | | |
| R76 | *A1 | R270 | *D2 | R455 | *A2 | | |
| R77 | *A1 | R271 | *C2 | R456 | *A2 | | |
| R78 | *B1 | R272 | C2 | R457 | *A2 | | |
| R79 | *B1 | R273 | C2 | R458 | *A2 | | |
| R80 | *B1 | R274 | C2 | R459 | *A2 | | |
| R81 | *B1 | R275 | C2 | R460 | *A2 | | |
| R82 | *B1 | R276 | C2 | R461 | *A2 | | |
| R83 | *A1 | R277 | C2 | R462 | *A2 | | |
| R84 | C1 | R278 | C2 | R463 | *A2 | | |
| R85 | C1 | R279 | D3 | R464 | *A2 | | |
| R86 | C1 | R280 | C3 | R465 | *A2 | | |
| R87 | *A1 | R281 | C3 | R466 | *A2 | | |
| R88 | *C1 | R282 | C3 | R467 | *A2 | | |
| R89 | *C1 | R283 | C3 | R468 | *A2 | | |
| R90 | *C1 | R284 | C3 | R469 | *A3 | | |
| R91 | *C1 | R285 | C3 | R470 | A3 | | |
| R92 | E2 | R286 | C3 | R471 | *A3 | | |
| R93 | E2 | R287 | C2 | R472 | A3 | | |
| R94 | E2 | R291 | C2 | R473 | *A2 | | |
| R95 | E2 | R292 | C2 | R474 | *A2 | | |
| R96 | E2 | R301 | C2 | R475 | *A3 | | |
| R97 | E2 | R302 | *C2 | R476 | A3 | | |
| R200 | *D1 | R303 | C2 | R477 | *A3 | | |
| R201 | *E1 | R304 | C2 | R478 | A3 | | |
| R202 | *E1 | R305 | C2 | R479 | *A2 | | |
| R203 | *E1 | R306 | C2 | R480 | *A2 | | |
| R204 | *E1 | R307 | C2 | R481 | *A3 | | |
| R205 | *E1 | R308 | C2 | R482 | *A3 | | |
| R206 | *E1 | R309 | *C3 | R484 | *A3 | | |
| R207 | *E1 | R310 | *C3 | R486 | *A3 | | |
| R208 | *E1 | R311 | C2 | R487 | *A3 | | |
| R209 | *D1 | R312 | C3 | R488 | *A3 | | |
| R210 | *D1 | R313 | C3 | R489 | *A3 | | |
| R211 | *D1 | R314 | C2 | R490 | *A2 | | |
| R212 | *E2 | R315 | C3 | R491 | *A1 | | |
| R213 | *D3 | R316 | C3 | R492 | *A3 | | |

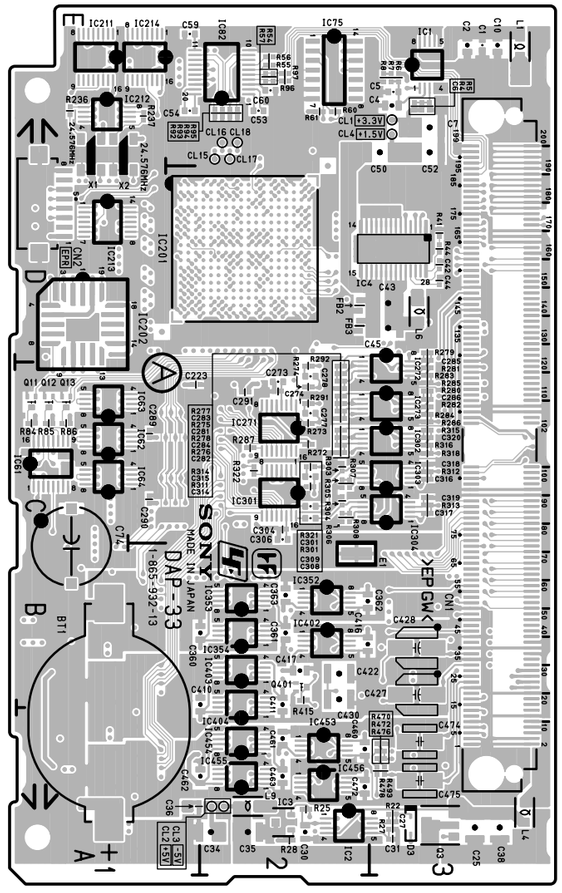DPR-265 (1-865-929-11)

| | | | | | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| C57 | A4 | C188 | *F2 | C280 | *F4 | C402 | *B3 | C530 | A1 | C742 | *C4 | C854 | *D4 | C954 | *E2 |
| C58 | C4 | C189 | *F2 | C281 | *F2 | C403 | *B3 | C531 | *A2 | C743 | *D4 | C855 | *D3 | C955 | *C2 |
| C59 | F5 | C190 | F5 | C282 | *F3 | C404 | *B4 | C532 | B4 | C744 | *C4 | C856 | *D3 | C956 | *C2 |
| C60 | F5 | C191 | F5 | C283 | *F4 | C405 | *B3 | C533 | B4 | C745 | *C4 | C857 | *D3 | C957 | *C2 |
| C61 | A2 | C192 | F5 | C284 | *F2 | C406 | *B3 | C534 | *B1 | C746 | *C4 | C858 | *D3 | C958 | *C1 |
| C101 | *E2 | C193 | F5 | C285 | *F2 | C407 | *B3 | C535 | A2 | C747 | *C4 | C865 | *D3 | C959 | *C2 |
| C102 | *E5 | C194 | *E5 | C286 | *F3 | C408 | *B3 | C536 | A2 | C748 | *D4 | C866 | *D4 | C960 | *C2 |
| C103 | E5 | C195 | B5 | C287 | *F3 | C409 | *B3 | C537 | A2 | C749 | *D4 | C867 | *D4 | C961 | *C2 |
| C104 | E1 | C196 | B5 | C288 | *F4 | C410 | *B3 | C538 | A2 | C752 | *E3 | C868 | *D4 | C962 | *C2 |
| C105 | E1 | C197 | B5 | C289 | *F4 | C411 | *C3 | C539 | A2 | C753 | *D4 | C869 | *D3 | C963 | *C2 |
| C106 | E5 | C198 | B5 | C290 | *F2 | C412 | *C4 | C540 | A2 | C754 | *C3 | C870 | *D3 | C964 | *C2 |
| C107 | E1 | C199 | C4 | C291 | *F3 | C413 | *C3 | C541 | A2 | C755 | *C5 | C871 | *D4 | C965 | *C2 |
| C108 | *E5 | C200 | *B2 | C292 | *F4 | C414 | *C3 | C542 | A2 | C756 | *C5 | C872 | *D4 | C966 | *C2 |
| C109 | *C5 | C201 | *F1 | C293 | *F2 | C415 | *B3 | C543 | A2 | C757 | *D3 | C873 | *D3 | C967 | *E5 |
| C110 | *C5 | C202 | *F2 | C294 | *F3 | C416 | *B4 | C544 | A2 | C758 | *D4 | C874 | *D4 | C968 | *D4 |
| C111 | *C5 | C203 | *F4 | C295 | *F4 | C417 | *B4 | C545 | A2 | C759 | *D3 | C875 | *D4 | C969 | *E5 |
| C112 | *E5 | C204 | *F2 | C296 | *F2 | C418 | *B3 | C546 | A2 | C760 | *D3 | C876 | *D4 | C970 | *D4 |
| C113 | *C5 | C205 | *F3 | C297 | *F2 | C419 | *B4 | C547 | *F4 | C761 | *D4 | C877 | *D4 | C971 | E5 |
| C114 | *E1 | C206 | *F4 | C298 | *F3 | C420 | *B3 | C548 | *F4 | C762 | *E3 | C878 | *D4 | C972 | *D5 |
| C115 | *F1 | C207 | *F2 | C299 | *F3 | C421 | *B3 | C601 | A4 | C763 | *D3 | C879 | *D3 | C973 | E5 |
| C116 | *E1 | C208 | *F1 | C300 | *F4 | C422 | *B3 | C602 | *A4 | C764 | *C3 | C880 | *D3 | C974 | *D5 |
| C117 | *E1 | C209 | *F3 | C301 | *F4 | C423 | *B3 | C603 | A4 | C765 | *C3 | C881 | *D4 | C975 | D5 |
| C118 | F5 | C210 | *F2 | C302 | F2 | C424 | *B3 | C604 | A4 | C766 | *D3 | C882 | *D4 | C976 | *E5 |
| C119 | C4 | C211 | *F4 | C303 | F2 | C425 | *B3 | C605 | A4 | C767 | *D3 | C883 | *D4 | C977 | E5 |
| C120 | E1 | C212 | *F4 | C304 | F3 | C426 | *B4 | C606 | *A4 | C768 | *D4 | C884 | *D4 | C978 | *D5 |
| C121 | *B5 | C213 | *F2 | C305 | F3 | C427 | *B3 | C607 | A4 | C769 | *E4 | C885 | *D4 | C979 | E5 |
| C122 | *C5 | C214 | *F3 | C306 | F4 | C428 | *B3 | C608 | *A4 | C770 | *D4 | C886 | *D3 | C980 | *D5 |
| C123 | *B5 | C215 | *F4 | C307 | F4 | C429 | *B3 | C609 | A4 | C771 | *D4 | C887 | *D3 | C981 | E5 |
| C124 | *B5 | C216 | *F2 | C308 | F2 | C430 | *B3 | C610 | A4 | C772 | *D4 | C888 | *D3 | C982 | *D5 |
| C125 | *C5 | C217 | *F3 | C309 | F3 | C431 | *B3 | C611 | A4 | C773 | *D4 | C889 | *D3 | C983 | E4 |
| C126 | *B5 | C218 | *F4 | C310 | F4 | C432 | *B3 | C612 | *A4 | C774 | D4 | C890 | *D3 | C984 | *D4 |
| C127 | *B5 | C219 | *F2 | C311 | F2 | C433 | *B3 | C613 | *A3 | C775 | *E4 | C891 | *D4 | C985 | E4 |
| C128 | *C5 | C220 | *F1 | C312 | F3 | C434 | *C3 | C614 | *A3 | C776 | *E4 | C892 | *D4 | C986 | *D4 |
| C129 | *A5 | C221 | *F3 | C313 | F4 | C435 | *B3 | C615 | A3 | C777 | *E4 | C895 | *B1 | C987 | E5 |
| C130 | *B5 | C222 | *F2 | C314 | F2 | C436 | *B4 | C616 | A3 | C778 | *E4 | C896 | *B1 | C988 | *D5 |
| C131 | F1 | C223 | *F4 | C315 | F3 | C437 | *B4 | C617 | A3 | C788 | *C4 | C897 | *B1 | C989 | C4 |
| C132 | F5 | C224 | *F4 | C316 | F4 | C438 | *B4 | C618 | A3 | C789 | *D3 | C898 | *E5 | C990 | C4 |
| C133 | F5 | C225 | F1 | C317 | F2 | C439 | *C4 | C619 | A3 | C790 | *D4 | C899 | *B1 | C991 | D5 |
| C134 | F5 | C226 | F1 | C318 | F3 | C440 | *B3 | C620 | A3 | C791 | *D3 | C900 | *B1 | C992 | C5 |
| C135 | E1 | C227 | F2 | C319 | F4 | C441 | *B4 | C621 | A3 | C792 | *D3 | C901 | D2 | C993 | C5 |
| C136 | *E1 | C228 | F2 | C320 | F2 | C442 | *C4 | C622 | A3 | C793 | *D4 | C902 | C2 | C994 | D5 |
| C137 | *E1 | C229 | F4 | C321 | F2 | C443 | *B3 | C623 | A3 | C794 | *E3 | C903 | D2 | C995 | D5 |
| C138 | *B5 | C230 | F4 | C322 | F3 | C444 | *B3 | C624 | *A3 | C795 | *D3 | C904 | C2 | C996 | C5 |
| C139 | *A5 | C231 | F1 | C323 | F3 | C445 | *B3 | C625 | A5 | C796 | *C3 | C905 | E1 | C997 | *C5 |
| C140 | *F5 | C232 | F3 | C324 | F4 | C446 | *B4 | C626 | A3 | C797 | *C3 | C906 | D1 | C998 | *C5 |
| C141 | *F1 | C233 | F4 | C325 | F4 | C447 | *B4 | C627 | A3 | C798 | *D3 | C907 | E2 | C999 | C4 |
| C142 | *E5 | C234 | F2 | C326 | F2 | C448 | B1 | C628 | *A4 | C799 | *D3 | C908 | D2 | | |
| C143 | *B5 | C235 | F3 | C327 | F3 | C449 | *B1 | C629 | A2 | C800 | *D4 | C909 | E2 | CL27 | C4 |
| C144 | *A5 | C236 | F4 | C328 | F4 | C450 | B1 | C630 | A2 | C801 | *E4 | C910 | D2 | CL28 | C4 |
| C145 | *B4 | C237 | F1 | C329 | F2 | C451 | B2 | C631 | A5 | C802 | *D4 | C911 | E2 | CL29 | C4 |
| C146 | *B5 | C238 | F3 | C330 | F2 | C452 | B2 | C632 | A5 | C803 | *D4 | C912 | D2 | CL30 | C4 |
| C147 | *B5 | C239 | F4 | C331 | F3 | C453 | *B2 | C633 | *A5 | C804 | *D4 | C913 | E2 | CL31 | C4 |
| C148 | *A4 | C240 | F1 | C332 | F3 | C454 | *B1 | C634 | *A4 | C805 | *D4 | C914 | D2 | CL32 | C4 |
| C149 | *A5 | C241 | F2 | C333 | F4 | C455 | *B2 | C701 | *C4 | C806 | D4 | C915 | E2 | CL33 | C4 |
| C150 | *A5 | C242 | F4 | C334 | F4 | C456 | *B3 | C702 | *C4 | C807 | *E4 | C916 | D2 | CL34 | C4 |
| C151 | *E1 | C243 | F1 | C335 | F2 | C457 | *B3 | C703 | *D4 | C808 | *E4 | C917 | D2 | CL35 | E3 |
| C152 | *F1 | C244 | F2 | C336 | F2 | C458 | *B3 | C704 | *E3 | C809 | *E4 | C918 | C2 | CL36 | *E4 |
| C153 | *B4 | C245 | F2 | C337 | F3 | C459 | *B3 | C705 | *E4 | C810 | *E4 | C919 | D2 | CL101 | E5 |
| C154 | *B5 | C246 | F3 | C338 | F3 | C460 | *A3 | C706 | *D3 | C820 | *D3 | C920 | C2 | CL102 | E1 |
| C155 | *A5 | C247 | F4 | C339 | F4 | C461 | *B3 | C707 | *E3 | C821 | *D4 | C921 | E2 | CL103 | E1 |
| C156 | *A5 | C248 | F4 | C340 | F4 | C462 | *B3 | C708 | *E3 | C822 | *D4 | C922 | D2 | CL104 | B5 |
| C157 | *F5 | C249 | F2 | C341 | F2 | C463 | *B3 | C709 | *E4 | C823 | *D3 | C923 | C2 | CL105 | A4 |
| C158 | *E5 | C250 | F3 | C342 | F4 | C464 | *C4 | C710 | *E4 | C824 | *D3 | C924 | C2 | CL201 | F1 |
| C159 | F1 | C251 | F4 | C343 | F4 | C501 | *A1 | C711 | *E4 | C825 | *D3 | C925 | C2 | CL202 | F2 |
| C160 | F1 | C252 | F2 | C344 | F2 | C502 | *A2 | C712 | *D3 | C826 | *D3 | C926 | C2 | CL203 | F4 |
| C161 | *A5 | C253 | F2 | C345 | F3 | C503 | *A1 | C713 | *D4 | C827 | *D3 | C927 | C1 | CL204 | F2 |
| C162 | *B4 | C254 | F3 | C346 | F4 | C504 | *A2 | C714 | *D4 | C828 | *D3 | C928 | C2 | CL205 | F3 |
| C163 | *A5 | C255 | F3 | C347 | E2 | C505 | *A1 | C715 | *C3 | C829 | *D4 | C929 | C2 | CL206 | F4 |
| C164 | *B4 | C256 | F4 | C348 | E4 | C506 | *A2 | C716 | *C4 | C830 | *C4 | C930 | C2 | CL401 | C4 |
| C165 | B4 | C257 | F4 | C349 | E4 | C507 | *A2 | C717 | *C4 | C831 | *C4 | C931 | C2 | CL402 | C4 |
| C166 | B4 | C258 | F1 | C350 | F2 | C508 | *A1 | C718 | *D4 | C832 | *C4 | C932 | C2 | CL403 | C3 |
| C167 | *F5 | C259 | F2 | C351 | E4 | C509 | *A2 | C719 | *C4 | C833 | *C4 | C933 | C2 | CL404 | C3 |
| C168 | *D1 | C260 | F2 | C352 | E4 | C510 | *A1 | C720 | *C4 | C834 | *D3 | C934 | *D2 | CL601 | A5 |
| C169 | *E1 | C261 | F3 | C353 | E4 | C511 | *A2 | C721 | *D4 | C835 | *D3 | C935 | *D2 | | |
| C170 | *E1 | C262 | F4 | C354 | E4 | C512 | *A1 | C722 | *C4 | C836 | *D4 | C936 | *D2 | CN101 | *E3 |
| C171 | *F5 | C263 | F4 | C355 | *F1 | C513 | *A1 | C723 | *D4 | C837 | *D3 | C937 | *D2 | CN201 | D1 |
| C172 | *F2 | C264 | F2 | C356 | *F1 | C514 | *A1 | C724 | *D4 | C838 | *D3 | C938 | *E2 | CN601 | A2 |
| C173 | *A2 | C265 | F3 | C357 | *F1 | C515 | *A2 | C727 | *C5 | C839 | *D3 | C939 | *C1 | | |
| C174 | *B1 | C266 | F3 | C358 | *F3 | C516 | *A1 | C728 | *D4 | C840 | *D3 | C940 | *E2 | D11 | C3 |
| C175 | *C4 | C267 | F2 | C359 | *F4 | C517 | *A2 | C729 | *E3 | C841 | *D3 | C941 | *C2 | D102 | E1 |
| C176 | *B1 | C268 | F3 | C360 | *F2 | C518 | *A1 | C730 | *E4 | C842 | *D3 | C942 | *E1 | D103 | E1 |
| C177 | *F4 | C269 | F4 | C361 | *F3 | C519 | A1 | C731 | *D3 | C843 | *D4 | C943 | *C2 | D104 | E1 |
| C178 | *F3 | C270 | E1 | C362 | *F4 | C520 | A1 | C732 | *E3 | C844 | *D4 | C944 | *E2 | D501 | *A1 |
| C179 | *F2 | C271 | E3 | C371 | *B1 | C521 | A1 | C733 | *E3 | C845 | *D4 | C945 | *C2 | D502 | *A2 |
| C180 | *F3 | C272 | E3 | C372 | *C1 | C522 | A1 | C734 | *E4 | C846 | *D4 | C946 | *E2 | D504 | A1 |
| C181 | *F2 | C273 | F1 | C373 | *C1 | C523 | A1 | C735 | *E4 | C847 | *D4 | C947 | *C2 | D505 | A1 |
| C182 | *F1 | C274 | F3 | C374 | *C1 | C524 | A1 | C736 | *E4 | C848 | *D4 | C948 | *E2 | D506 | A1 |
| C183 | C1 | C275 | E3 | C375 | *D1 | C525 | A1 | C737 | *D3 | C849 | *D4 | C949 | *C2 | D507 | *A2 |
| C184 | *C1 | C276 | E2 | C376 | *D1 | C526 | A1 | C738 | *D4 | C850 | *D4 | C950 | *D2 | | |
| C185 | *E1 | C277 | E2 | C377 | *E4 | C527 | *A2 | C739 | *D4 | C851 | *D4 | C951 | *D2 | E1 | F1 |
| C186 | *E1 | C278 | *F2 | C399 | E4 | C528 | A2 | C740 | *C3 | C852 | *D4 | C952 | *D2 | E2 | B1 |
| C187 | *E1 | C279 | *F3 | C401 | *B3 | C529 | A2 | C741 | *C4 | C853 | *D4 | C953 | *D2 | | |

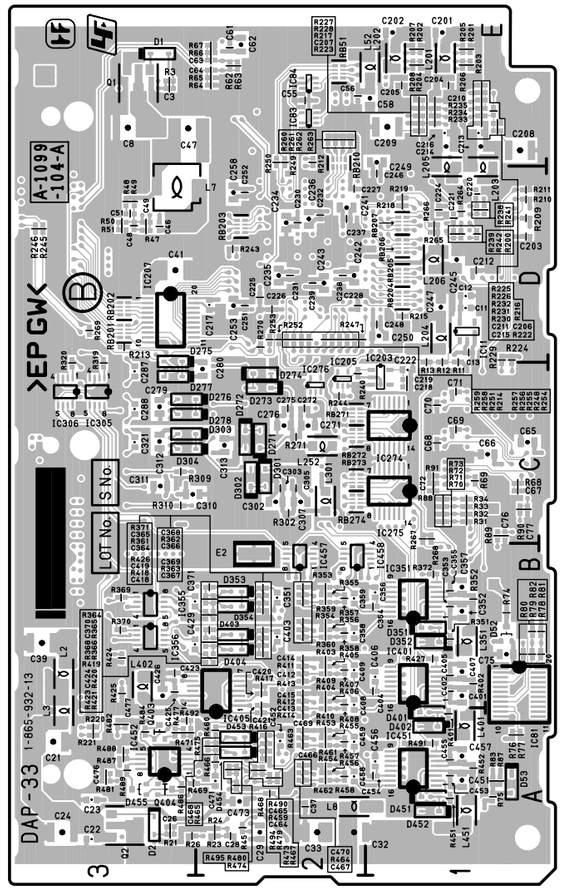


**DPR-265** -A SIDE-
SUFFIX: -11

| | | | | | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| FB101 | *C5 | FB609 | A3 | FB921 | E5 | IC201 | *F2 | IC227 | E2 | IC511 | *A2 | IC904 | *E2 | L209 | F4 | L505 | *A2 | Q105 | F5 |
| FB102 | *B5 | FB610 | A3 | FB922 | *E5 | IC202 | *F3 | IC228 | E4 | IC512 | *A1 | IC905 | *D2 | L210 | E2 | L506 | A1 | Q106 | F5 |
| FB103 | *C5 | FB611 | A3 | FB923 | E5 | IC203 | *F4 | IC230 | E3 | IC513 | *A1 | IC906 | *C2 | L211 | E2 | L507 | *A2 | Q107 | A4 |
| FB104 | *B5 | FB612 | *A3 | FB924 | *D5 | IC204 | F1 | IC231 | E3 | IC514 | *A2 | IC907 | E5 | L212 | *F2 | L508 | A1 | Q108 | B4 |
| FB105 | *F5 | FB613 | A3 | FB925 | C4 | IC205 | F3 | IC232 | F2 | IC515 | *A2 | IC908 | *D5 | L213 | *F3 | L509 | A1 | Q201 | F1 |
| FB106 | *E5 | FB901 | E2 | FB926 | *C5 | IC206 | F4 | IC301 | B3 | IC516 | A2 | IC909 | C5 | L214 | *F4 | L510 | A1 | Q202 | F1 |
| FB107 | *E5 | FB902 | D1 | FB927 | *C5 | IC208 | F3 | IC302 | *C1 | IC517 | A2 | | | L215 | *F2 | L511 | *A2 | Q203 | F1 |
| FB108 | *E5 | FB903 | D2 | | | IC209 | F4 | IC303 | *C1 | IC518 | A2 | L101 | E1 | L216 | *F3 | L512 | *B1 | Q204 | F1 |
| FB201 | F2 | FB904 | C2 | FL201 | *F1 | IC210 | E2 | IC304 | *C1 | IC519 | A2 | L102 | C5 | L217 | *F4 | L601 | A4 | Q501 | *A2 |
| FB202 | F3 | FB905 | D2 | FL202 | *F3 | IC211 | E3 | IC305 | *C1 | IC520 | A2 | L103 | B5 | L218 | F2 | L602 | A3 | Q502 | *B1 |
| FB203 | F3 | FB906 | C1 | FL203 | *F4 | IC212 | E3 | IC306 | *D1 | IC521 | A2 | L104 | A5 | L219 | F3 | L603 | A3 | Q503 | *A1 |
| FB204 | F2 | FB907 | C2 | FL204 | *F2 | IC213 | *F2 | IC307 | *D1 | IC522 | *E4 | L105 | E5 | L220 | F4 | L801 | *C5 | Q504 | *A2 |
| FB205 | F4 | FB908 | C2 | FL205 | *F3 | IC214 | *F3 | IC308 | *E4 | IC523 | *E4 | L107 | *E1 | L221 | E4 | L802 | *C4 | Q505 | A1 |
| FB206 | F5 | FB909 | C2 | FL206 | *F4 | IC215 | *F4 | IC310 | *A3 | IC601 | *A4 | L108 | *F1 | L222 | E4 | L803 | *C4 | Q506 | A1 |
| FB501 | A2 | FB910 | *D2 | | | IC216 | F2 | IC402 | B2 | IC602 | A3 | L109 | *E1 | L401 | *A4 | L804 | *C4 | Q507 | A1 |
| FB502 | A2 | FB911 | *D2 | IC101 | *E1 | IC217 | F3 | IC403 | *B2 | IC603 | A3 | L111 | *F5 | L402 | *A4 | L805 | *C4 | Q601 | *A4 |
| FB503 | A2 | FB912 | *E2 | IC102 | F5 | IC218 | F4 | IC501 | *A1 | IC604 | A4 | L112 | *F5 | L403 | *B4 | L806 | *B1 | Q602 | *A5 |
| FB601 | *A4 | FB913 | *C2 | IC103 | E1 | IC219 | F2 | IC502 | *A2 | IC801 | D3 | L201 | *F1 | L404 | B1 | | | Q603 | *A4 |
| FB602 | *A4 | FB914 | *D2 | IC104 | *B5 | IC220 | F3 | IC503 | *A1 | IC802 | *B1 | L202 | *F2 | L405 | *B1 | LP1 | A1 | Q604 | *A4 |
| FB603 | A4 | FB915 | *D1 | IC105 | *B5 | IC221 | F4 | IC504 | *A2 | IC803 | *E4 | L203 | *F3 | L406 | *A3 | | | | |
| FB604 | A4 | FB916 | *C2 | IC106 | *B4 | IC222 | E2 | IC505 | *A1 | IC804 | *D1 | L204 | *F2 | L407 | *C4 | Q11 | *C3 | R101 | F5 |
| FB605 | A4 | FB917 | *C2 | IC107 | *E1 | IC223 | E4 | IC506 | A2 | IC805 | D1 | L205 | *F3 | L501 | *A1 | Q101 | E5 | R102 | E1 |
| FB606 | A4 | FB918 | *C2 | IC108 | *E1 | IC224 | E4 | IC507 | B1 | IC901 | E2 | L206 | *F4 | L502 | *A2 | Q102 | *E1 | R103 | *B5 |
| FB607 | *A4 | FB919 | *E5 | IC110 | *E3 | IC225 | E2 | IC509 | *B4 | IC902 | D2 | L207 | F2 | L503 | *A1 | Q103 | *E1 | R104 | *B5 |
| FB608 | A3 | FB920 | *D4 | IC111 | *C2 | IC226 | E3 | IC510 | *B4 | IC903 | C2 | L208 | F3 | L504 | *A2 | Q104 | E5 | R105 | *B5 |




**DPR-265** -B SIDE-

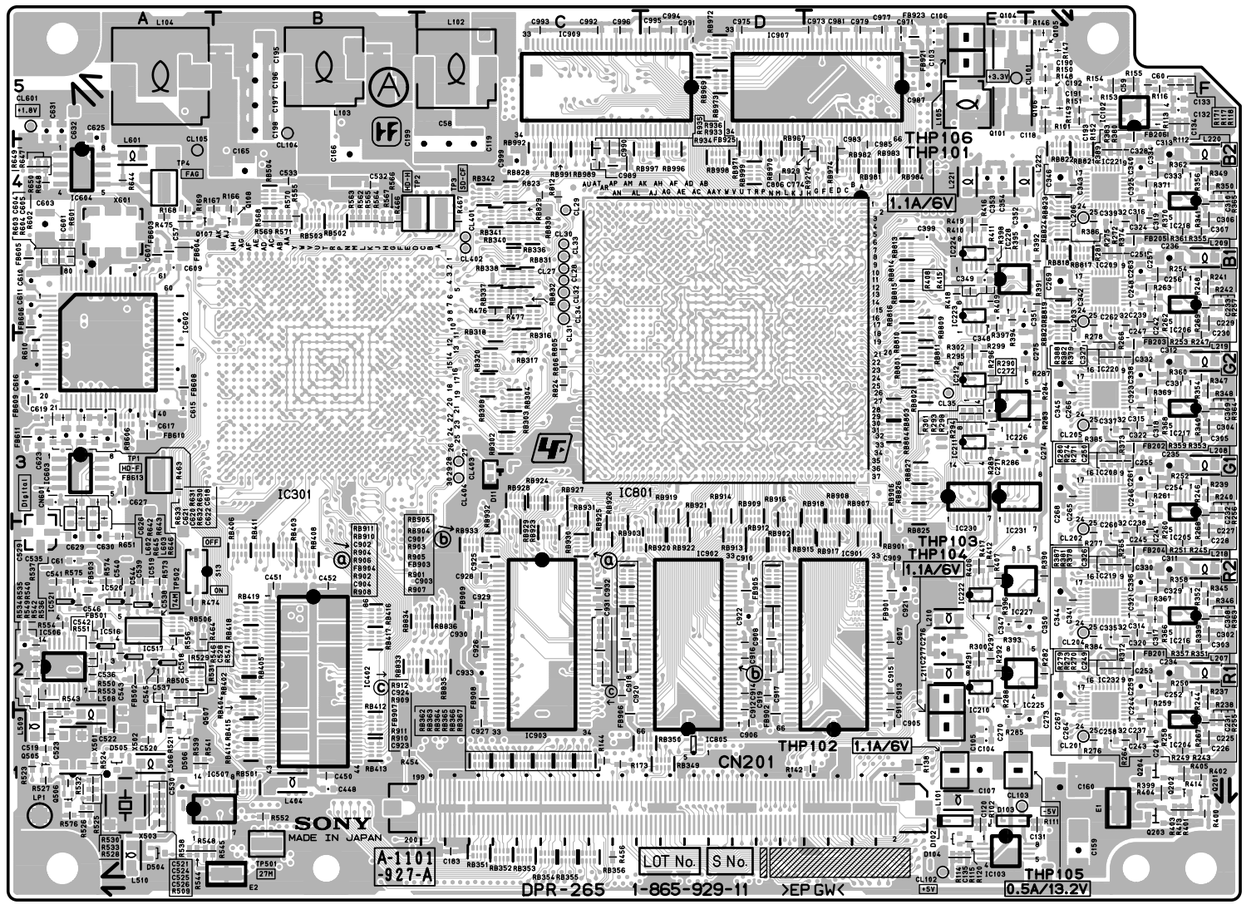SUFFIX: -11

| | | | | | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| R106 | *B4 | R131 | *A5 | R168 | A4 | R219 | *F2 | R244 | F2 | R269 | F4 | R294 | E3 | R322 | *F3 | R347 | F3 | R372 | F2 |
| R107 | *B4 | R132 | *B4 | R169 | A4 | R220 | *F3 | R245 | F2 | R270 | F2 | R295 | E3 | R323 | *F4 | R348 | F3 | R373 | F3 |
| R108 | *B5 | R133 | *A4 | R170 | *E1 | R221 | *F4 | R246 | F3 | R271 | F3 | R296 | E3 | R324 | *F2 | R349 | F4 | R374 | F4 |
| R109 | *B5 | R134 | *E5 | R171 | F5 | R222 | *F2 | R247 | F3 | R272 | F4 | R297 | E2 | R325 | *F3 | R350 | F4 | R378 | F2 |
| R110 | *B5 | R135 | *E5 | R172 | *C2 | R223 | *F1 | R248 | F4 | R273 | F2 | R298 | E3 | R326 | *F4 | R351 | F2 | R379 | F3 |
| R111 | F1 | R136 | *B4 | R173 | C1 | R224 | *F3 | R249 | F1 | R274 | F3 | R299 | E3 | R327 | *F2 | R352 | F2 | R380 | F4 |
| R112 | F5 | R137 | *A4 | R174 | *F1 | R225 | *F3 | R250 | F2 | R275 | F4 | R300 | E2 | R328 | *F3 | R353 | F3 | R381 | F2 |
| R113 | F5 | R138 | E1 | R201 | *F2 | R226 | *F4 | R251 | F2 | R276 | F1 | R301 | E3 | R329 | *F4 | R354 | F3 | R382 | F3 |
| R114 | E1 | R141 | *E1 | R202 | *F3 | R227 | *F4 | R252 | F3 | R277 | F2 | R302 | E3 | R330 | *F2 | R355 | F4 | R383 | F4 |
| R115 | E1 | R142 | E1 | R203 | *F4 | R228 | *F1 | R253 | F3 | R278 | F4 | R303 | *F2 | R331 | *F2 | R356 | F4 | R384 | F2 |
| R116 | F5 | R143 | *E1 | R204 | *F2 | R229 | *F2 | R254 | F4 | R279 | F2 | R304 | *F3 | R332 | *F3 | R357 | F2 | R385 | F3 |
| R117 | F5 | R144 | C1 | R205 | *F3 | R230 | *F4 | R255 | F1 | R280 | F3 | R305 | *F4 | R333 | *F3 | R358 | F2 | R386 | F4 |
| R118 | F5 | R145 | *E3 | R206 | *F4 | R231 | *F2 | R256 | F3 | R281 | F4 | R309 | *F2 | R334 | *F4 | R359 | F3 | R387 | F2 |
| R119 | *E1 | R146 | F5 | R207 | *F2 | R232 | *F3 | R257 | F4 | R282 | F2 | R310 | *F3 | R335 | *F4 | R360 | F3 | R388 | F3 |
| R120 | E1 | R147 | F5 | R208 | *F3 | R233 | *F4 | R258 | F1 | R283 | F3 | R311 | *F4 | R336 | *F2 | R361 | F4 | R389 | F4 |
| R121 | *B5 | R148 | F5 | R209 | *F4 | R234 | *F2 | R259 | F1 | R284 | F3 | R312 | *F2 | R337 | *F3 | R362 | F4 | R390 | F2 |
| R122 | *B5 | R149 | F5 | R210 | *F2 | R235 | *F3 | R260 | F3 | R285 | E1 | R313 | *F3 | R338 | *F4 | R363 | F2 | R391 | F4 |
| R123 | *F1 | R150 | F5 | R211 | *F3 | R236 | *F4 | R261 | F3 | R286 | E3 | R314 | *F4 | R339 | F2 | R364 | F3 | R392 | F4 |
| R124 | *B5 | R151 | F5 | R212 | *F4 | R237 | F2 | R262 | F4 | R287 | E3 | R315 | *F2 | R340 | F3 | R365 | F4 | R393 | E2 |
| R125 | *A5 | R152 | F5 | R213 | *F2 | R238 | F2 | R263 | F4 | R288 | E2 | R316 | *F3 | R341 | F4 | R366 | F2 | R394 | E4 |
| R126 | *F1 | R153 | F5 | R214 | *F3 | R239 | F3 | R264 | F1 | R289 | E3 | R317 | *F4 | R342 | *F2 | R367 | F2 | R395 | E4 |
| R127 | *F1 | R154 | F5 | R215 | *F4 | R240 | F3 | R265 | F2 | R290 | E3 | R318 | *F2 | R343 | *F3 | R368 | F3 | R396 | E2 |
| R128 | *B4 | R155 | F5 | R216 | *F1 | R241 | F4 | R266 | F4 | R291 | E2 | R319 | *F3 | R344 | *F4 | R369 | F3 | R397 | E4 |
| R129 | *A5 | R166 | B4 | R217 | *F3 | R242 | F4 | R267 | F1 | R292 | E2 | R320 | *F4 | R345 | F2 | R370 | F4 | R398 | E4 |
| R130 | *B4 | R167 | B4 | R218 | *F4 | R243 | F1 | R268 | F3 | R293 | E3 | R321 | *F2 | R346 | F2 | R371 | F4 | R399 | F1 |

| | | | | | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| R400 | F1 | R538 | A1 | R645 | A3 | RB311 | *C1 | RB502 | B4 | RB944 | *D2 | | | | | | | | |
| R401 | F1 | R539 | A1 | R646 | A3 | RB312 | *C1 | RB503 | B4 | RB945 | *D3 | | | | | | | | |
| R402 | F1 | R540 | A2 | R647 | A4 | RB313 | *C1 | RB504 | B4 | RB946 | *D3 | | | | | | | | |
| R403 | F1 | R541 | A1 | R648 | A4 | RB314 | *C1 | RB505 | A2 | RB947 | *D3 | | | | | | | | |
| R404 | F1 | R542 | A2 | R649 | A4 | RB316 | C4 | RB506 | A2 | RB948 | *E3 | | | | | | | | |
| R405 | F1 | R543 | A2 | R650 | A4 | RB317 | C3 | RB601 | *A4 | RB949 | *E3 | | | | | | | | |
| R406 | E2 | R544 | A1 | R651 | A2 | RB318 | C4 | RB602 | *A4 | RB950 | *E2 | | | | | | | | |
| R407 | E2 | R545 | A1 | R652 | *A4 | RB320 | C3 | RB603 | *A3 | RB951 | *E2 | | | | | | | | |
| R408 | E4 | R546 | A2 | R653 | *A4 | RB321 | *C4 | RB604 | *A3 | RB952 | *D2 | | | | | | | | |
| R409 | E4 | R547 | A2 | R654 | *A4 | RB322 | *C4 | RB605 | *A3 | RB953 | *D3 | | | | | | | | |
| R410 | E4 | R548 | A1 | R664 | *A3 | RB323 | *C1 | RB606 | A3 | RB954 | *D3 | | | | | | | | |
| R411 | E4 | R549 | A2 | R801 | *C4 | RB324 | *C1 | RB801 | E3 | RB955 | *D3 | | | | | | | | |
| R412 | E2 | R550 | A2 | R802 | *C4 | RB325 | *C1 | RB802 | E3 | RB956 | *C3 | | | | | | | | |
| R413 | F1 | R551 | A2 | R803 | *C3 | RB326 | *C1 | RB803 | E3 | RB957 | *C3 | | | | | | | | |
| R414 | F1 | R552 | B1 | R804 | *C3 | RB327 | *C1 | RB804 | E3 | RB958 | *C2 | | | | | | | | |
| R415 | E4 | R553 | A2 | R805 | C3 | RB328 | *C1 | RB805 | *E3 | RB959 | *C2 | | | | | | | | |
| R416 | E4 | R554 | A2 | R806 | C3 | RB329 | *C1 | RB806 | *E3 | RB960 | *C3 | | | | | | | | |
| R417 | E2 | R555 | B4 | R807 | *C3 | RB330 | *C1 | RB807 | *E3 | RB961 | *C3 | | | | | | | | |
| R418 | E4 | R556 | A2 | R808 | *E5 | RB331 | *D1 | RB809 | E4 | RB962 | *C3 | | | | | | | | |
| R419 | E4 | R557 | *B4 | R810 | *E4 | RB332 | *D1 | RB810 | E3 | RB963 | *C3 | | | | | | | | |
| R432 | *F2 | R558 | *B4 | R811 | *C3 | RB333 | *D1 | RB811 | E3 | RB964 | *C3 | | | | | | | | |
| R433 | *F3 | R559 | *B4 | R812 | C4 | RB334 | *D1 | RB813 | E4 | RB965 | *C3 | | | | | | | | |
| R434 | *F4 | R560 | *B4 | R813 | *B1 | RB336 | C4 | RB814 | E4 | RB966 | *C3 | | | | | | | | |
| R435 | *F2 | R561 | *B4 | R814 | *C4 | RB337 | C4 | RB815 | E4 | RB967 | D4 | | | | | | | | |
| R436 | *F3 | R562 | B4 | R815 | *E4 | RB338 | C4 | RB816 | E4 | RB968 | *D4 | | | | | | | | |
| R437 | *F4 | R563 | B4 | R816 | *E5 | RB340 | C4 | RB817 | F4 | RB969 | D5 | | | | | | | | |
| R451 | *D1 | R564 | B4 | R817 | *C4 | RB341 | C4 | RB818 | F4 | RB970 | D4 | | | | | | | | |
| R452 | *D1 | R565 | B4 | R818 | *C4 | RB342 | C4 | RB819 | F4 | RB971 | D4 | | | | | | | | |
| R453 | *D1 | R566 | B4 | R819 | *C4 | RB343 | *C1 | RB820 | F4 | RB972 | D5 | | | | | | | | |
| R454 | B1 | R567 | B4 | R820 | *C4 | RB344 | *C1 | RB821 | F4 | RB973 | D5 | | | | | | | | |
| R456 | C1 | R568 | B4 | R821 | *C4 | RB345 | *D1 | RB822 | F4 | RB974 | E4 | | | | | | | | |
| R457 | *B3 | R569 | B4 | R822 | *B1 | RB346 | *D1 | RB823 | F4 | RB975 | *E4 | | | | | | | | |
| R458 | *B3 | R570 | B4 | R823 | C4 | RB347 | *D1 | RB824 | F4 | RB976 | *E4 | | | | | | | | |
| R459 | *E4 | R571 | B4 | R824 | C3 | RB348 | *D1 | RB825 | E3 | RB977 | *E4 | | | | | | | | |
| R460 | *E3 | R572 | *A1 | R901 | D2 | RB349 | D1 | RB826 | E3 | RB978 | *E4 | | | | | | | | |
| R461 | *B4 | R573 | A2 | R902 | C2 | RB350 | D1 | RB827 | E3 | RB979 | *D4 | | | | | | | | |
| R462 | *C3 | R574 | A2 | R903 | D2 | RB351 | C1 | RB828 | C4 | RB980 | *D4 | | | | | | | | |
| R463 | A3 | R575 | A2 | R904 | C2 | RB352 | C1 | RB829 | C4 | RB981 | E4 | | | | | | | | |
| R464 | A2 | R576 | A1 | R905 | D2 | RB353 | C1 | RB830 | C4 | RB982 | E4 | | | | | | | | |
| R465 | *A3 | R577 | *A2 | R906 | C2 | RB354 | C1 | RB831 | C4 | RB983 | E4 | | | | | | | | |
| R466 | B4 | R578 | *B1 | R907 | D2 | RB355 | C1 | RB832 | C4 | RB984 | E4 | | | | | | | | |
| R467 | C4 | R579 | *A2 | R908 | C2 | RB356 | C1 | RB833 | B2 | RB985 | *D4 | | | | | | | | |
| R468 | *C3 | R580 | *B4 | R909 | C2 | RB357 | *C2 | RB834 | C2 | RB986 | *D4 | | | | | | | | |
| R469 | *B4 | R581 | *B4 | R910 | C2 | RB358 | *B1 | RB835 | C2 | RB987 | *D4 | | | | | | | | |
| R470 | *C3 | R582 | *E5 | R911 | C2 | RB359 | *B1 | RB836 | C2 | RB988 | *D4 | | | | | | | | |
| R471 | *B3 | R583 | *E4 | R912 | C2 | RB360 | *B1 | RB837 | *C3 | RB989 | C4 | | | | | | | | |
| R472 | *C3 | R584 | *E5 | R913 | *D2 | RB361 | *B1 | RB838 | *E4 | RB990 | *C5 | | | | | | | | |
| R473 | *C3 | R585 | *E4 | R914 | *D2 | RB362 | C1 | RB839 | *E4 | RB991 | C4 | | | | | | | | |
| R474 | A2 | R601 | A4 | R915 | *D2 | RB363 | C1 | RB840 | *D1 | RB992 | C4 | | | | | | | | |
| R475 | A4 | R602 | A4 | R916 | *D2 | RB364 | C1 | RB901 | E2 | RB993 | *C5 | | | | | | | | |
| R476 | C4 | R603 | A4 | R917 | *D2 | RB365 | C1 | RB902 | D2 | RB994 | *C5 | | | | | | | | |
| R477 | C4 | R604 | A4 | R918 | *D2 | RB366 | C1 | RB903 | C2 | RB995 | *C5 | | | | | | | | |
| R480 | *C4 | R605 | *A4 | R919 | *D2 | RB367 | C1 | RB904 | D2 | RB996 | D4 | | | | | | | | |
| R481 | *C4 | R606 | *A4 | R920 | *D2 | RB368 | *E4 | RB905 | D2 | RB997 | D4 | | | | | | | | |
| R482 | *B3 | R607 | *A4 | R921 | *C2 | RB369 | *E4 | RB906 | E3 | RB998 | D4 | | | | | | | | |
| R501 | *A1 | R608 | *A4 | R922 | *C2 | RB370 | *E3 | RB907 | E3 | RB999 | D4 | | | | | | | | |
| R502 | *A1 | R609 | *A4 | R923 | *C2 | RB371 | *E3 | RB908 | E3 | | | | | | | | | | |
| R503 | *A2 | R610 | A3 | R924 | *C2 | RB372 | *E3 | RB909 | D3 | S13 | A2 | | | | | | | | |
| R504 | *A2 | R611 | *A3 | R925 | *E5 | RB373 | *E4 | RB910 | C2 | | | | | | | | | | |
| R505 | *A1 | R612 | *A3 | R926 | *D4 | RB374 | *E4 | RB911 | C2 | THP101 | E5 | | | | | | | | |
| R506 | *A2 | R613 | *A3 | R927 | E4 | RB375 | *E3 | RB912 | D2 | THP102 | E1 | | | | | | | | |
| R507 | *A1 | R614 | *A3 | R928 | *D4 | RB376 | *E3 | RB913 | D2 | THP103 | E2 | | | | | | | | |
| R508 | *A2 | R615 | *A3 | R929 | E4 | RB377 | *E3 | RB914 | D3 | THP104 | E1 | | | | | | | | |
| R509 | A1 | R616 | *A4 | R930 | *D4 | RB378 | *E4 | RB915 | D2 | THP105 | E1 | | | | | | | | |
| R510 | *A2 | R617 | *A3 | R931 | *E5 | RB379 | *E4 | RB916 | D3 | THP106 | E5 | | | | | | | | |
| R511 | *A2 | R618 | *A3 | R932 | *D5 | RB402 | B2 | RB917 | E2 | | | | | | | | | | |
| R512 | *A1 | R619 | *A3 | R933 | C4 | RB403 | B2 | RB918 | E3 | TP1 | A3 | | | | | | | | |
| R513 | *A2 | R620 | *A3 | R934 | C4 | RB404 | B2 | RB919 | D3 | TP2 | B4 | | | | | | | | |
| R514 | *A1 | R621 | *A3 | R935 | C4 | RB405 | B2 | RB920 | D2 | TP3 | C4 | | | | | | | | |
| R515 | *A2 | R622 | *A3 | R936 | C4 | RB406 | B2 | RB921 | D3 | TP4 | A4 | | | | | | | | |
| R516 | *A2 | R623 | *A3 | | | RB407 | *B2 | RB922 | D2 | TP501 | B1 | | | | | | | | |
| R517 | *A1 | R624 | *A3 | RB101 | *E1 | RB408 | B2 | RB923 | C2 | TP502 | A2 | | | | | | | | |
| R518 | *A1 | R625 | *A3 | RB102 | *E1 | RB409 | *B1 | RB924 | C3 | | | | | | | | | | |
| R519 | *A2 | R626 | *A3 | RB103 | *D1 | RB410 | *B2 | RB925 | C2 | X501 | A1 | | | | | | | | |
| R520 | *A1 | R627 | *A3 | RB104 | *E1 | RB411 | B2 | RB926 | C2 | X502 | A1 | | | | | | | | |
| R521 | A1 | R628 | *A3 | RB105 | *E1 | RB412 | B1 | RB927 | C3 | X503 | A1 | | | | | | | | |
| R522 | *A2 | R629 | *A3 | RB106 | *D1 | RB413 | B1 | RB928 | C3 | X601 | A4 | | | | | | | | |
| R523 | A1 | R630 | A3 | RB107 | *E1 | RB414 | B1 | RB929 | C2 | | | | | | | | | | |
| R524 | A1 | R631 | A3 | RB108 | *E1 | RB415 | B1 | RB930 | C2 | *:B SIDE | | | | | | | | | |
| R525 | A1 | R632 | A3 | RB110 | *E1 | RB416 | B2 | RB931 | C3 | | | | | | | | | | |
| R526 | A1 | R633 | A3 | RB111 | *E1 | RB417 | B2 | RB932 | C2 | | | | | | | | | | |
| R527 | A1 | R634 | *A3 | RB112 | *E1 | RB418 | B2 | RB933 | C2 | | | | | | | | | | |
| R528 | A1 | R635 | *A3 | RB113 | *D1 | RB419 | B2 | RB934 | *D2 | | | | | | | | | | |
| R529 | A2 | R636 | *A3 | RB301 | *B3 | RB420 | *B2 | RB935 | *D2 | | | | | | | | | | |
| R530 | A1 | R637 | *A4 | RB302 | C3 | RB421 | *B2 | RB936 | *E3 | | | | | | | | | | |
| R531 | A1 | R638 | *A4 | RB303 | C3 | RB422 | *B2 | RB937 | *D3 | | | | | | | | | | |
| R532 | A1 | R639 | *A5 | RB304 | C3 | RB423 | *B2 | RB938 | *D2 | | | | | | | | | | |
| R533 | A1 | R640 | *A4 | RB306 | *C3 | RB424 | *B2 | RB939 | *E2 | | | | | | | | | | |
| R534 | A2 | R641 | *A4 | RB307 | *C3 | RB425 | *B2 | RB940 | *E3 | | | | | | | | | | |
| R535 | A2 | R642 | A3 | RB308 | C3 | RB426 | *B1 | RB941 | *E3 | | | | | | | | | | |
| R536 | A2 | R643 | A3 | RB309 | *C1 | RB427 | *B1 | RB942 | *D3 | | | | | | | | | | |
| R537 | A2 | R644 | A4 | RB310 | *C1 | RB501 | B1 | RB943 | *C2 | | | | | | | | | | |

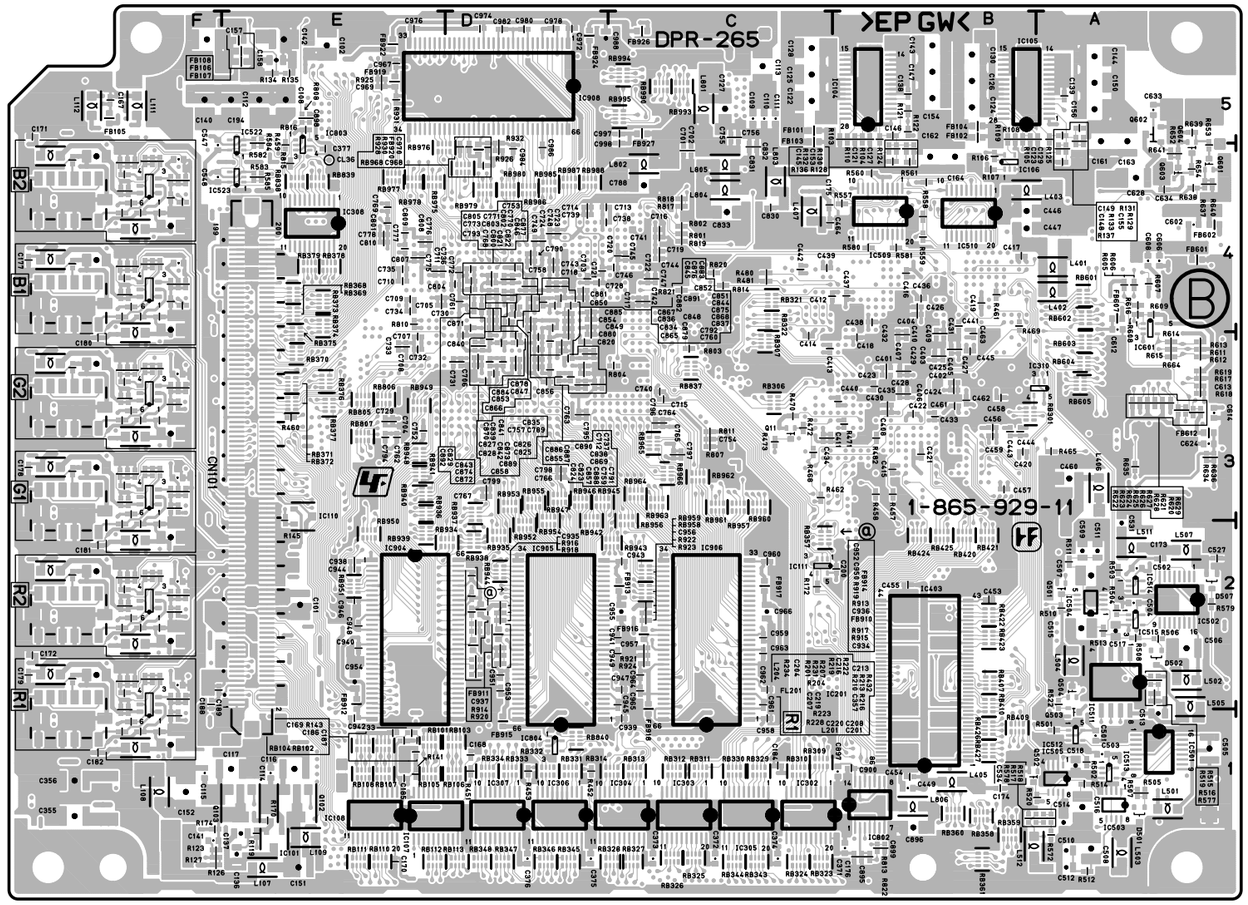DPR-265 (1-865-929-13,14)

| | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| C11 | *B5 | C186 | *E1 | C278 | *F2 | C399 | E4 | C528 | A2 | C740 | *C3 | C852 | *D4 | C952 | *D2 |
| C12 | *A5 | C187 | *E1 | C279 | *F3 | C401 | *B3 | C529 | A2 | C741 | *C4 | C853 | *D4 | C953 | *D2 |
| C57 | A4 | C188 | *F2 | C280 | *F4 | C402 | *B3 | C530 | A1 | C742 | *C4 | C854 | *D4 | C954 | *E2 |
| C58 | C4 | C189 | *F2 | C281 | *F2 | C403 | *B3 | C531 | *A2 | C743 | *D4 | C855 | *D3 | C955 | *C2 |
| C59 | F5 | C190 | F5 | C282 | *F3 | C404 | *B4 | C532 | B4 | C744 | *C4 | C856 | *D3 | C956 | *C2 |
| C60 | F5 | C191 | F5 | C283 | *F4 | C405 | *B3 | C533 | B4 | C745 | *C4 | C857 | *D3 | C957 | *C2 |
| C61 | A2 | C192 | F5 | C284 | *F2 | C406 | *B3 | C534 | *B1 | C746 | *C4 | C858 | *D3 | C958 | *C1 |
| C101 | *E2 | C193 | F5 | C285 | *F2 | C407 | *B3 | C535 | A2 | C747 | *C4 | C865 | *D3 | C959 | *C2 |
| C102 | *E5 | C194 | *F5 | C286 | *F3 | C408 | *B3 | C536 | A2 | C748 | *D4 | C866 | *D4 | C960 | *C2 |
| C103 | E5 | C195 | B5 | C287 | *F3 | C409 | *B3 | C537 | A2 | C749 | *D4 | C867 | *D4 | C961 | *C2 |
| C104 | E1 | C196 | B5 | C288 | *F4 | C410 | *B3 | C538 | A2 | C752 | *E3 | C868 | *D4 | C962 | *C2 |
| C105 | E1 | C197 | B5 | C289 | *F4 | C411 | *C3 | C539 | A2 | C753 | *D4 | C869 | *D3 | C963 | *C2 |
| C106 | E5 | C198 | B5 | C290 | *F2 | C412 | *C4 | C540 | A2 | C754 | *C3 | C870 | *D3 | C964 | *C2 |
| C107 | E1 | C199 | C4 | C291 | *F3 | C413 | *C3 | C541 | A2 | C755 | *C5 | C871 | *D4 | C965 | *C2 |
| C108 | *E5 | C200 | *B2 | C292 | *F4 | C414 | *C3 | C542 | A2 | C756 | *C5 | C872 | *D4 | C966 | *C2 |
| C109 | *C5 | C201 | *F1 | C293 | *F2 | C415 | *B3 | C543 | A2 | C757 | *D3 | C873 | *D3 | C967 | *E5 |
| C110 | *C5 | C202 | *F2 | C294 | *F3 | C416 | *B4 | C544 | A2 | C758 | *D4 | C874 | *D4 | C968 | *D4 |
| C111 | *C5 | C203 | *F4 | C295 | *F4 | C417 | *B4 | C545 | A2 | C759 | *D3 | C875 | *D4 | C969 | *E5 |
| C112 | *E5 | C204 | *F2 | C296 | *F2 | C418 | *B3 | C546 | A2 | C760 | *D3 | C876 | *D4 | C970 | *D4 |
| C113 | *C5 | C205 | *F3 | C297 | *F2 | C419 | *B4 | C547 | *F4 | C761 | *D4 | C877 | *D4 | C971 | E5 |
| C114 | *E1 | C206 | *F4 | C298 | *F3 | C420 | *B3 | C548 | *F4 | C762 | *E3 | C878 | *D4 | C972 | *D5 |
| C115 | *F1 | C207 | *F1 | C299 | *F3 | C421 | *B3 | C601 | A4 | C763 | *D3 | C879 | *D3 | C973 | E5 |
| C116 | *E1 | C208 | *F1 | C300 | *F4 | C422 | *B3 | C602 | *A4 | C764 | *C3 | C880 | *D3 | C974 | *D5 |
| C117 | *E1 | C209 | *F3 | C301 | *F4 | C423 | *B3 | C603 | A4 | C765 | *C3 | C881 | *D4 | C975 | D5 |
| C118 | F5 | C210 | *F2 | C302 | F2 | C424 | *B3 | C604 | A4 | C766 | *D3 | C882 | *D4 | C976 | *E5 |
| C119 | C4 | C211 | *F4 | C303 | F2 | C425 | *B3 | C605 | A4 | C767 | *D3 | C883 | *D4 | C977 | E5 |
| C120 | E1 | C212 | *F4 | C304 | F3 | C426 | *B4 | C606 | *A4 | C768 | *D4 | C884 | *D4 | C978 | *D5 |
| C121 | *B5 | C213 | *F2 | C305 | F3 | C427 | *B3 | C607 | A4 | C769 | *E4 | C885 | *D4 | C979 | E5 |
| C122 | *C5 | C214 | *F3 | C306 | F4 | C428 | *B3 | C608 | *A4 | C770 | *D4 | C886 | *D3 | C980 | *D5 |
| C123 | *B5 | C215 | *F4 | C307 | F4 | C429 | *B3 | C609 | A4 | C771 | *D4 | C887 | *D3 | C981 | E5 |
| C124 | *B5 | C216 | *F2 | C308 | F2 | C430 | *B3 | C610 | A4 | C772 | *D4 | C888 | *D3 | C982 | *D5 |
| C125 | *C5 | C217 | *F3 | C309 | F3 | C431 | *B3 | C611 | A4 | C773 | *D4 | C889 | *D3 | C983 | E4 |
| C126 | *B5 | C218 | *F4 | C310 | F4 | C432 | *B3 | C612 | *A4 | C774 | D4 | C890 | *D3 | C984 | *D4 |
| C127 | *B5 | C219 | *F1 | C311 | F2 | C433 | *B3 | C613 | *A3 | C775 | *E4 | C891 | *D4 | C985 | E4 |
| C128 | *C5 | C220 | *F1 | C312 | F3 | C434 | *C3 | C614 | *A3 | C776 | *E4 | C892 | *D4 | C986 | *D4 |
| C129 | *A5 | C221 | *F3 | C313 | F4 | C435 | *B3 | C615 | A3 | C777 | *E4 | C895 | *B1 | C987 | E5 |
| C130 | *B5 | C222 | *F2 | C314 | F2 | C436 | *B4 | C616 | A3 | C778 | *E4 | C896 | *B1 | C988 | *D5 |
| C131 | F1 | C223 | *F4 | C315 | F3 | C437 | *B4 | C617 | A3 | C788 | *C4 | C897 | *B1 | C989 | C4 |
| C132 | F5 | C224 | *F4 | C316 | F4 | C438 | *B4 | C618 | A3 | C789 | *D3 | C898 | *E5 | C990 | C4 |
| C133 | F5 | C225 | F1 | C317 | F2 | C439 | *C4 | C619 | A3 | C790 | *D4 | C899 | *B1 | C991 | D5 |
| C134 | F5 | C226 | F1 | C318 | F3 | C440 | *B3 | C620 | A3 | C791 | *D3 | C900 | *B1 | C992 | C5 |
| C135 | E1 | C227 | F2 | C319 | F4 | C441 | *B4 | C621 | A3 | C792 | *D3 | C901 | D2 | C993 | C5 |
| C136 | *E1 | C228 | F2 | C320 | F2 | C442 | *C4 | C622 | A3 | C793 | *D4 | C902 | C2 | C994 | D5 |
| C137 | *E1 | C229 | F4 | C321 | F2 | C443 | *B3 | C623 | A3 | C794 | *E3 | C903 | D2 | C995 | D5 |
| C138 | *B5 | C230 | F4 | C322 | F3 | C444 | *B3 | C624 | *A3 | C795 | *D3 | C904 | C2 | C996 | C5 |
| C139 | *A5 | C231 | F1 | C323 | F3 | C445 | *B3 | C625 | A5 | C796 | *C3 | C905 | E1 | C997 | *C5 |
| C140 | *F5 | C232 | F3 | C324 | F4 | C446 | *B4 | C626 | A3 | C797 | *C3 | C906 | D1 | C998 | *C4 |
| C141 | *F1 | C233 | F4 | C325 | F4 | C447 | *B4 | C627 | A3 | C798 | *D3 | C907 | E2 | C999 | C4 |
| C142 | *E5 | C234 | F2 | C326 | F2 | C448 | B1 | C628 | *A4 | C799 | *D3 | C908 | D2 | | |
| C143 | *B5 | C235 | F3 | C327 | F3 | C449 | *B1 | C629 | A2 | C800 | *D4 | C909 | E2 | CL27 | C4 |
| C144 | *A5 | C236 | F4 | C328 | F4 | C450 | B1 | C630 | A2 | C801 | *E4 | C910 | D2 | CL28 | C4 |
| C145 | *B4 | C237 | F1 | C329 | F2 | C451 | B2 | C631 | A5 | C802 | *D4 | C911 | E2 | CL29 | C4 |
| C146 | *B5 | C238 | F3 | C330 | F2 | C452 | B2 | C632 | A5 | C803 | *D4 | C912 | D2 | CL30 | C4 |
| C147 | *B5 | C239 | F4 | C331 | F3 | C453 | *B2 | C633 | *A5 | C804 | *D4 | C913 | E2 | CL31 | C4 |
| C148 | *A4 | C240 | F1 | C332 | F3 | C454 | *B1 | C634 | *A4 | C805 | *D4 | C914 | D2 | CL32 | C4 |
| C149 | *A5 | C241 | F2 | C333 | F4 | C455 | *B2 | C701 | *C4 | C806 | D4 | C915 | E2 | CL33 | C4 |
| C150 | *A5 | C242 | F4 | C334 | F4 | C456 | *B3 | C702 | *C4 | C807 | *E4 | C916 | D2 | CL35 | E3 |
| C151 | *E1 | C243 | F1 | C335 | F2 | C457 | *B3 | C703 | *D4 | C808 | *E4 | C917 | D2 | CL36 | *E4 |
| C152 | *F1 | C244 | F2 | C336 | F2 | C458 | *B3 | C704 | *E3 | C809 | *E4 | C918 | C2 | CL101 | E5 |
| C153 | *B4 | C245 | F2 | C337 | F3 | C459 | *B3 | C705 | *E4 | C810 | *E4 | C919 | D2 | CL102 | E1 |
| C154 | *B5 | C246 | F3 | C338 | F3 | C460 | *A3 | C706 | *D3 | C820 | *D3 | C920 | C2 | CL103 | E1 |
| C155 | *A5 | C247 | F4 | C339 | F4 | C461 | *B3 | C707 | *E3 | C821 | *D4 | C921 | E2 | CL104 | B5 |
| C156 | *A5 | C248 | F4 | C340 | F4 | C462 | *B3 | C708 | *E3 | C822 | *D4 | C922 | D2 | CL105 | A4 |
| C157 | *F5 | C249 | F2 | C341 | F2 | C463 | *B3 | C709 | *E4 | C823 | *D3 | C923 | C2 | CL201 | F1 |
| C158 | *E5 | C250 | F3 | C342 | F4 | C464 | *C4 | C710 | *E4 | C824 | *D3 | C924 | C2 | CL202 | F2 |
| C159 | F1 | C251 | F4 | C343 | F4 | C501 | *A1 | C711 | *E4 | C825 | *D3 | C925 | C2 | CL203 | F4 |
| C160 | F1 | C252 | F2 | C344 | F2 | C502 | *A2 | C712 | *D3 | C826 | *D3 | C926 | C2 | CL204 | F2 |
| C161 | *A5 | C253 | F2 | C345 | F3 | C503 | *A1 | C713 | *D4 | C827 | *D3 | C927 | C1 | CL205 | F3 |
| C162 | *B4 | C254 | F3 | C346 | F4 | C504 | *A2 | C714 | *D4 | C828 | *D3 | C928 | C2 | CL206 | F4 |
| C163 | *A5 | C255 | F3 | C347 | E2 | C505 | *A1 | C715 | *C3 | C829 | *D4 | C929 | C2 | CL401 | C4 |
| C164 | *B4 | C256 | F4 | C348 | E4 | C506 | *A2 | C716 | *C4 | C830 | *C4 | C930 | C2 | CL402 | C4 |
| C165 | B4 | C257 | F4 | C349 | E4 | C507 | *A2 | C717 | *C4 | C831 | *C4 | C931 | C2 | CL403 | C3 |
| C166 | B4 | C258 | F1 | C350 | F2 | C508 | *A1 | C718 | *D4 | C832 | *C4 | C932 | C2 | CL601 | A5 |
| C167 | *F5 | C259 | F2 | C351 | E4 | C509 | *A2 | C719 | *C4 | C833 | *C4 | C933 | C2 | | |
| C168 | *D1 | C260 | F2 | C352 | E4 | C510 | *A1 | C720 | *C4 | C834 | *D3 | C934 | *D2 | CN101 | *E3 |
| C169 | *E1 | C261 | F3 | C353 | E4 | C511 | *A2 | C721 | *D4 | C835 | *D3 | C935 | *D2 | CN201 | D1 |
| C170 | *E1 | C262 | F4 | C354 | E4 | C512 | *A1 | C722 | *C4 | C836 | *D4 | C936 | *D2 | CN601 | A2 |
| C171 | *F5 | C263 | F4 | C355 | *F1 | C513 | *A1 | C723 | *D4 | C837 | *D3 | C937 | *D2 | | |
| C172 | *F2 | C264 | F2 | C356 | *F1 | C514 | *A1 | C724 | *D4 | C838 | *D3 | C938 | *E2 | D11 | C3 |
| C173 | *A2 | C265 | F3 | C357 | *F1 | C515 | *A2 | C727 | *C5 | C839 | *D3 | C939 | *C1 | D102 | E1 |
| C174 | *B1 | C266 | F3 | C358 | *F3 | C516 | *A1 | C728 | *D4 | C840 | *D3 | C940 | *E2 | D103 | E1 |
| C175 | *C4 | C267 | F2 | C359 | *F4 | C517 | *A2 | C729 | *E3 | C841 | *D3 | C941 | *C2 | D104 | E1 |
| C176 | *B1 | C268 | F3 | C360 | *F2 | C518 | *A1 | C730 | *E4 | C842 | *D3 | C942 | *E1 | D501 | *A1 |
| C177 | *F4 | C269 | F4 | C361 | *F3 | C519 | A1 | C731 | *D3 | C843 | *D4 | C943 | *C2 | D502 | *A2 |
| C178 | *F3 | C270 | E1 | C362 | *F4 | C520 | A1 | C732 | *E3 | C844 | *D4 | C944 | *E2 | D504 | A1 |
| C179 | *F2 | C271 | E3 | C371 | *B1 | C521 | A1 | C733 | *E3 | C845 | *D4 | C945 | *C2 | D505 | A1 |
| C180 | *F3 | C272 | E3 | C372 | *C1 | C522 | A1 | C734 | *E4 | C846 | *D4 | C946 | *E2 | D506 | A1 |
| C181 | *F2 | C273 | F1 | C373 | *C1 | C523 | A1 | C735 | *E4 | C847 | *D4 | C947 | *C2 | D507 | *A2 |
| C182 | *F1 | C274 | F3 | C374 | *C1 | C524 | A1 | C736 | *E4 | C848 | *D4 | C948 | *E2 | | |
| C183 | C1 | C275 | E3 | C375 | *D1 | C525 | A1 | C737 | *D3 | C849 | *D4 | C949 | *C2 | E1 | F1 |
| C184 | *C1 | C276 | E2 | C376 | *D1 | C526 | A1 | C738 | *D4 | C850 | *D4 | C950 | *D2 | E2 | B1 |
| C185 | *E1 | C277 | E2 | C377 | *E4 | C527 | *A2 | C739 | *D4 | C851 | *D4 | C951 | *D2 | | |




**DPR-265** -A SIDE-
SUFFIX: -13, 14

| | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| FB101 | *C5 | FB609 | A3 | FB921 | E5 | IC201 | *F2 | IC227 | E2 | IC511 | *A2 | IC904 | *E2 | L208 | F3 | L504 | *A2 | Q104 | E5 |
| FB102 | *B5 | FB610 | A3 | FB922 | *E5 | IC202 | *F3 | IC228 | E4 | IC512 | *A1 | IC905 | *D2 | L209 | F4 | L505 | *A2 | Q105 | F5 |
| FB103 | *C5 | FB611 | A3 | FB923 | E5 | IC203 | *F4 | IC230 | E3 | IC513 | *A1 | IC906 | *C2 | L210 | E2 | L506 | A1 | Q106 | F5 |
| FB104 | *B5 | FB612 | *A3 | FB924 | *D5 | IC204 | F1 | IC231 | E3 | IC514 | *A2 | IC907 | E5 | L211 | E2 | L507 | *A2 | Q107 | A4 |
| FB105 | *F5 | FB613 | A3 | FB925 | C4 | IC205 | F3 | IC232 | F2 | IC515 | *A2 | IC908 | *D5 | L212 | *F2 | L508 | A1 | Q108 | B4 |
| FB106 | *E5 | FB901 | E2 | FB926 | *C5 | IC206 | F4 | IC301 | B3 | IC516 | A2 | IC909 | C5 | L213 | *F3 | L509 | A1 | Q201 | F1 |
| FB107 | *E5 | FB902 | D1 | FB927 | *C5 | IC208 | F3 | IC302 | *C1 | IC517 | A2 | | | L214 | *F4 | L510 | A1 | Q202 | F1 |
| FB108 | *E5 | FB903 | D2 | | | IC209 | F4 | IC303 | *C1 | IC518 | A2 | L101 | E1 | L215 | *F2 | L511 | *A2 | Q203 | F1 |
| FB201 | F2 | FB904 | C2 | FL201 | *F1 | IC210 | E2 | IC304 | *C1 | IC519 | A2 | L102 | C5 | L216 | *F3 | L512 | *B1 | Q204 | F1 |
| FB202 | F3 | FB905 | D2 | FL202 | *F3 | IC211 | E3 | IC305 | *C1 | IC520 | A2 | L103 | B5 | L217 | *F4 | L601 | A4 | Q501 | *A2 |
| FB203 | F3 | FB906 | C1 | FL203 | *F4 | IC212 | E3 | IC306 | *D1 | IC521 | A2 | L104 | A5 | L218 | F2 | L602 | A3 | Q502 | *B1 |
| FB204 | F2 | FB907 | C2 | FL204 | *F2 | IC213 | *F2 | IC307 | *D1 | IC522 | *E4 | L105 | E5 | L219 | F3 | L603 | A3 | Q503 | *A1 |
| FB205 | F4 | FB908 | C2 | FL205 | *F3 | IC214 | *F3 | IC308 | *E4 | IC523 | *E4 | L106 | E5 | L220 | F4 | L801 | *C5 | Q504 | *A2 |
| FB206 | F5 | FB909 | C2 | FL206 | *F4 | IC215 | *F4 | IC310 | *A3 | IC601 | *A4 | L107 | *E1 | L221 | E4 | L802 | *C4 | Q505 | A1 |
| FB501 | A2 | FB910 | *D2 | | | IC216 | F2 | IC402 | B2 | IC602 | A3 | L108 | *F1 | L222 | E4 | L803 | *C4 | Q506 | A1 |
| FB502 | A2 | FB911 | *D2 | IC101 | *E1 | IC217 | F3 | IC405 | *B2 | IC603 | A3 | L109 | *E1 | L401 | *A4 | L804 | *C4 | Q507 | A1 |
| FB503 | A2 | FB912 | *E2 | IC102 | F5 | IC218 | F4 | IC501 | *A1 | IC604 | A4 | L111 | *F5 | L402 | *A4 | L805 | *C4 | Q601 | *A4 |
| FB601 | *A4 | FB913 | *C2 | IC103 | E1 | IC219 | F2 | IC502 | *A2 | IC801 | D3 | L112 | *F5 | L403 | *B4 | L806 | *B1 | Q602 | *A5 |
| FB602 | *A4 | FB914 | *D2 | IC104 | *B5 | IC220 | F3 | IC503 | *A1 | IC802 | *B1 | L201 | *F1 | L404 | B1 | | | Q603 | *A4 |
| FB603 | A4 | FB915 | *D1 | IC105 | *B5 | IC221 | F4 | IC504 | *A2 | IC803 | *B4 | L202 | *F2 | L405 | *B1 | LP1 | A1 | Q604 | *A4 |
| FB604 | A4 | FB916 | *C2 | IC106 | *B4 | IC222 | E2 | IC505 | *A1 | IC804 | *D1 | L203 | *F3 | L406 | *A3 | | | | |
| FB605 | A4 | FB917 | *C2 | IC107 | *E1 | IC223 | E4 | IC506 | A2 | IC805 | D1 | L204 | *F2 | L407 | *C4 | Q11 | *C3 | R11 | *B5 |
| FB606 | A4 | FB918 | *C1 | IC108 | *E1 | IC224 | E4 | IC507 | B1 | IC901 | E2 | L205 | *F3 | L501 | *A1 | Q101 | E5 | R12 | *A5 |
| FB607 | *A4 | FB919 | *E5 | IC110 | *E3 | IC225 | E2 | IC509 | *B4 | IC902 | D2 | L206 | *F4 | L502 | *A2 | Q102 | *E1 | R101 | F5 |
| FB608 | A3 | FB920 | *D4 | IC111 | *C2 | IC226 | E3 | IC510 | *B4 | IC903 | C2 | L207 | F2 | L503 | *A1 | Q103 | *E1 | R102 | E1 |




**DPR-265** -B SIDE-

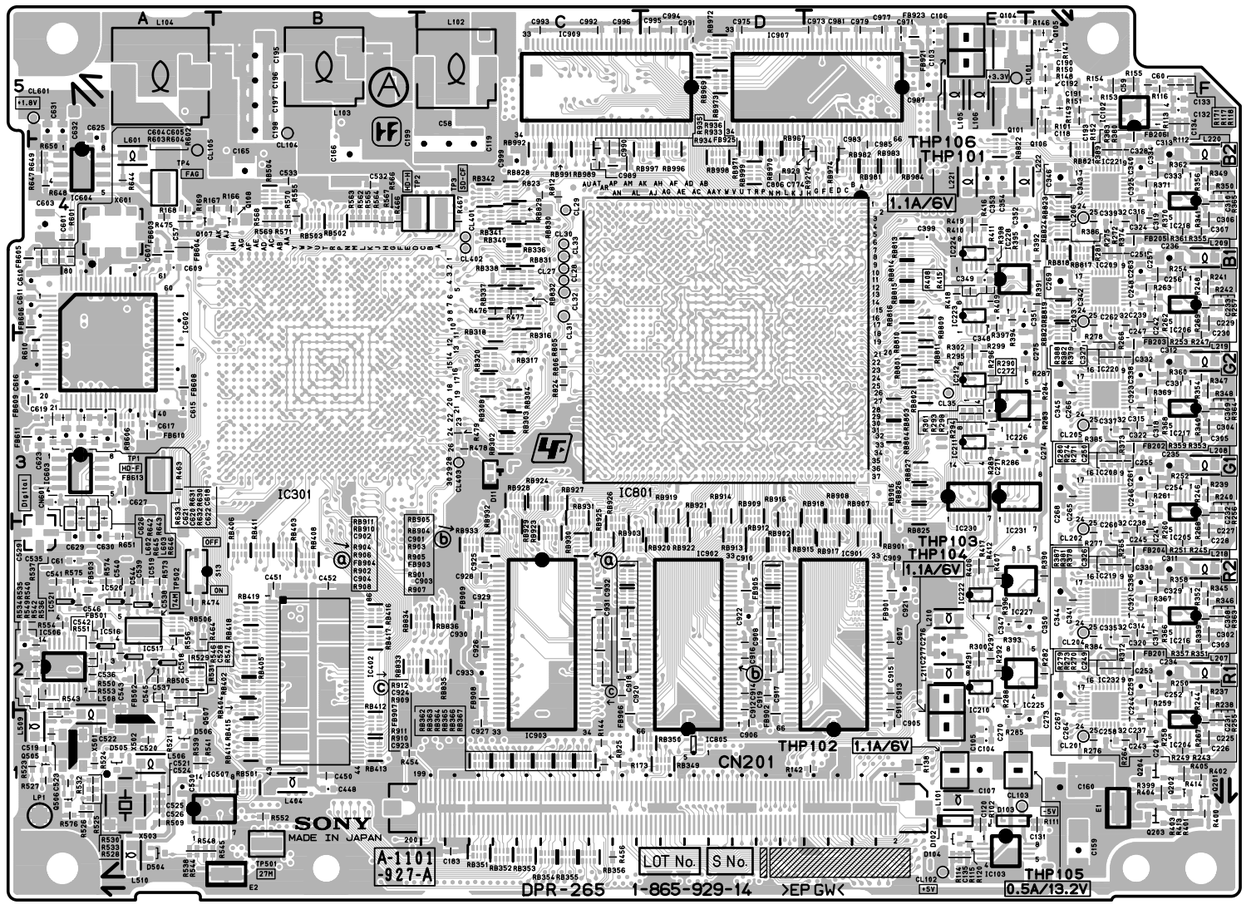SUFFIX: -13, 14

| | | | | | | | | | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| R103 | *B5 | R128 | *B4 | R155 | F5 | R216 | *F1 | R241 | F4 | R266 | F4 | R291 | E2 | R319 | *F3 | R344 | *F4 | R369 | F3 |
| R104 | *B5 | R129 | *A5 | R166 | B4 | R217 | *F3 | R242 | F4 | R267 | F1 | R292 | E2 | R320 | *F4 | R345 | F2 | R370 | F4 |
| R105 | *B5 | R130 | *B4 | R167 | B4 | R218 | *F4 | R243 | F1 | R268 | F3 | R293 | E3 | R321 | *F2 | R346 | F2 | R371 | F4 |
| R106 | *B4 | R131 | *A5 | R168 | A4 | R219 | *F2 | R244 | F2 | R269 | F4 | R294 | E3 | R322 | *F3 | R347 | F3 | R372 | F2 |
| R107 | *B4 | R132 | *B4 | R169 | A4 | R220 | *F3 | R245 | F2 | R270 | F2 | R295 | E3 | R323 | *F4 | R348 | F3 | R373 | F3 |
| R108 | *B5 | R133 | *A4 | R170 | *E1 | R221 | *F4 | R246 | F3 | R271 | F3 | R296 | E3 | R324 | *F2 | R349 | F4 | R374 | F4 |
| R109 | *B5 | R134 | *E5 | R171 | F5 | R222 | *F2 | R247 | F3 | R272 | F4 | R297 | E2 | R325 | *F3 | R350 | F4 | R378 | F2 |
| R110 | *B5 | R135 | *E5 | R172 | *C2 | R223 | *F1 | R248 | F4 | R273 | F2 | R298 | E3 | R326 | *F4 | R351 | F2 | R379 | F3 |
| R111 | F1 | R136 | *B4 | R173 | C1 | R224 | *F3 | R249 | F1 | R274 | F3 | R299 | E3 | R327 | *F2 | R352 | F2 | R380 | F4 |
| R112 | F5 | R137 | *A4 | R174 | *F1 | R225 | *F3 | R250 | F2 | R275 | F4 | R300 | E2 | R328 | *F3 | R353 | F3 | R381 | F2 |
| R113 | F5 | R138 | E1 | R201 | *F2 | R226 | *F4 | R251 | F2 | R276 | F1 | R301 | E3 | R329 | *F4 | R354 | F3 | R382 | F3 |
| R114 | E1 | R141 | *E1 | R202 | *F3 | R227 | *F4 | R252 | F3 | R277 | F2 | R302 | E3 | R330 | *F2 | R355 | F4 | R383 | F4 |
| R115 | E1 | R142 | E1 | R203 | *F4 | R228 | *F1 | R253 | F3 | R278 | F4 | R303 | *F2 | R331 | *F2 | R356 | F4 | R384 | F2 |
| R116 | F5 | R143 | *E1 | R204 | *F2 | R229 | *F2 | R254 | F4 | R279 | F2 | R304 | *F3 | R332 | *F3 | R357 | F2 | R385 | F3 |
| R117 | F5 | R144 | C1 | R205 | *F3 | R230 | *F4 | R255 | F1 | R280 | F3 | R305 | *F4 | R333 | *F3 | R358 | F2 | R386 | F4 |
| R118 | F5 | R145 | *E2 | R206 | *F4 | R231 | *F2 | R256 | F3 | R281 | F4 | R309 | *F2 | R334 | *F4 | R359 | F3 | R387 | F2 |
| R119 | *E1 | R146 | F5 | R207 | *F2 | R232 | *F3 | R257 | F4 | R282 | F2 | R310 | *F3 | R335 | *F4 | R360 | F3 | R388 | F3 |
| R120 | E1 | R147 | F5 | R208 | *F3 | R233 | *F4 | R258 | F1 | R283 | F3 | R311 | *F4 | R336 | *F2 | R361 | F4 | R389 | F4 |
| R121 | *B5 | R148 | F5 | R209 | *F4 | R234 | *F2 | R259 | F1 | R284 | F3 | R312 | *F2 | R337 | *F3 | R362 | F4 | R390 | F2 |
| R122 | *B5 | R149 | F5 | R210 | *F2 | R235 | *F3 | R260 | F3 | R285 | E1 | R313 | *F3 | R338 | *F4 | R363 | F2 | R391 | F4 |
| R123 | *F1 | R150 | F5 | R211 | *F3 | R236 | *F4 | R261 | F3 | R286 | E3 | R314 | *F4 | R339 | F2 | R364 | F3 | R392 | F4 |
| R124 | *B5 | R151 | F5 | R212 | *F4 | R237 | F2 | R262 | F4 | R287 | E3 | R315 | *F2 | R340 | F3 | R365 | F4 | R393 | E2 |
| R125 | *A5 | R152 | F5 | R213 | *F2 | R238 | F2 | R263 | F4 | R288 | E2 | R316 | *F3 | R341 | F4 | R366 | F2 | R394 | E4 |
| R126 | *F1 | R153 | F5 | R214 | *F3 | R239 | F3 | R264 | F1 | R289 | E3 | R317 | *F4 | R342 | *F2 | R367 | F2 | R395 | E4 |
| R127 | *F1 | R154 | F5 | R215 | *F4 | R240 | F3 | R265 | F2 | R290 | E3 | R318 | *F2 | R343 | *F3 | R368 | F3 | R396 | E2 |

| | | | | | | | | | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| R397 | E4 | R531 | A1 | R636 | *A3 | RB110 | *E1 | RB416 | B2 | RB931 | C3 |
| R398 | E4 | R532 | A1 | R637 | *A4 | RB111 | *E1 | RB417 | B2 | RB932 | C2 |
| R399 | F1 | R533 | A1 | R638 | *A4 | RB112 | *E1 | RB418 | B2 | RB933 | C2 |
| R400 | F1 | R534 | A2 | R639 | *A5 | RB113 | *D1 | RB419 | B2 | RB934 | *D2 |
| R401 | F1 | R535 | A2 | R640 | *A4 | RB301 | *B3 | RB420 | *B2 | RB935 | *D2 |
| R402 | F1 | R536 | A2 | R641 | *A4 | RB302 | C3 | RB421 | *B2 | RB936 | *E3 |
| R403 | F1 | R537 | A2 | R642 | A3 | RB303 | C3 | RB422 | *B2 | RB937 | *D3 |
| R404 | F1 | R538 | A1 | R643 | A3 | RB304 | C3 | RB423 | *B2 | RB938 | *D2 |
| R405 | F1 | R539 | A1 | R644 | A4 | RB306 | *C3 | RB424 | *B2 | RB939 | *E2 |
| R406 | E2 | R540 | A2 | R645 | A3 | RB307 | *C3 | RB425 | *B2 | RB940 | *E3 |
| R407 | E2 | R541 | A1 | R646 | A3 | RB308 | C3 | RB426 | *B1 | RB941 | *E3 |
| R408 | E4 | R542 | A2 | R647 | A4 | RB309 | *C1 | RB427 | *B1 | RB942 | *D2 |
| R409 | E4 | R543 | A2 | R648 | A4 | RB310 | *C1 | RB501 | B1 | RB943 | *C2 |
| R410 | E4 | R544 | A1 | R649 | A4 | RB311 | *C1 | RB502 | B4 | RB944 | *D2 |
| R411 | E4 | R545 | A1 | R650 | A4 | RB312 | *C1 | RB503 | B4 | RB945 | *D3 |
| R412 | E2 | R546 | A2 | R651 | A2 | RB313 | *C1 | RB504 | B4 | RB946 | *D3 |
| R413 | F1 | R547 | A2 | R652 | *A4 | RB314 | *C1 | RB505 | A2 | RB947 | *D3 |
| R414 | F1 | R548 | A1 | R653 | *A4 | RB316 | C4 | RB506 | A2 | RB948 | *E3 |
| R415 | E4 | R549 | A2 | R654 | *A4 | RB317 | C3 | RB601 | *A4 | RB949 | *E3 |
| R416 | E4 | R550 | A2 | R664 | *A3 | RB318 | C4 | RB602 | *A4 | RB950 | *E2 |
| R417 | E2 | R551 | A2 | R801 | *C4 | RB320 | C3 | RB603 | *A3 | RB951 | *E2 |
| R418 | E4 | R552 | B1 | R802 | *C4 | RB321 | *C4 | RB604 | *A3 | RB952 | *D2 |
| R419 | E4 | R553 | A2 | R803 | *C4 | RB322 | *C4 | RB605 | *A3 | RB953 | *D3 |
| R432 | *F2 | R554 | A2 | R804 | *C4 | RB323 | *C1 | RB606 | A3 | RB954 | *D2 |
| R433 | *F3 | R555 | B4 | R805 | C3 | RB324 | *C1 | RB801 | E3 | RB955 | *D3 |
| R434 | *F4 | R556 | A2 | R806 | C3 | RB325 | *C1 | RB802 | E3 | RB956 | *C2 |
| R435 | *F2 | R557 | *B4 | R807 | *C3 | RB326 | *C1 | RB803 | E3 | RB957 | *C3 |
| R436 | *F3 | R558 | *B4 | R808 | *E5 | RB327 | *C1 | RB804 | E3 | RB958 | *C2 |
| R437 | *F4 | R559 | *B4 | R810 | *E4 | RB328 | *C1 | RB805 | *E3 | RB959 | *C2 |
| R451 | *D1 | R560 | *B4 | R811 | *C3 | RB329 | *C1 | RB806 | *E3 | RB960 | *C3 |
| R452 | *D1 | R561 | *B4 | R812 | C4 | RB330 | *C1 | RB807 | *E3 | RB961 | *C3 |
| R453 | *D1 | R562 | B4 | R813 | *B1 | RB331 | *D1 | RB809 | E4 | RB962 | *C3 |
| R454 | B1 | R563 | B4 | R814 | *C4 | RB332 | *D1 | RB810 | E3 | RB963 | *C3 |
| R456 | C1 | R564 | B4 | R815 | *E4 | RB333 | *D1 | RB811 | E3 | RB964 | *C3 |
| R457 | *B3 | R565 | B4 | R816 | *E5 | RB334 | *D1 | RB813 | E4 | RB965 | *C3 |
| R458 | *B3 | R566 | B4 | R817 | *C4 | RB336 | C4 | RB814 | E4 | RB966 | *C3 |
| R459 | *E4 | R567 | B4 | R818 | *C4 | RB337 | C4 | RB815 | E4 | RB967 | D4 |
| R460 | *E3 | R568 | B4 | R819 | *C4 | RB338 | C4 | RB816 | E4 | RB968 | *D4 |
| R461 | *B4 | R569 | B4 | R820 | *C4 | RB340 | C4 | RB817 | F4 | RB969 | D5 |
| R462 | *C3 | R570 | B4 | R821 | *C4 | RB341 | C4 | RB818 | F4 | RB970 | D4 |
| R463 | A3 | R571 | B4 | R822 | *B1 | RB342 | C4 | RB819 | F4 | RB971 | D4 |
| R464 | A2 | R572 | *A1 | R823 | C4 | RB343 | *C1 | RB820 | F4 | RB972 | D5 |
| R465 | *A3 | R573 | A2 | R824 | C3 | RB344 | *C1 | RB821 | F4 | RB973 | D5 |
| R466 | B4 | R574 | A2 | R825 | C1 | RB345 | *D1 | RB822 | E4 | RB974 | E4 |
| R467 | C4 | R575 | A2 | R826 | *C4 | RB346 | *D1 | RB823 | F4 | RB975 | *E4 |
| R468 | *C3 | R576 | A1 | R827 | *C4 | RB347 | *D1 | RB824 | F4 | RB976 | *E4 |
| R469 | *B4 | R577 | *A2 | R828 | *C4 | RB348 | *D1 | RB825 | E3 | RB977 | *E4 |
| R470 | *C3 | R578 | *A1 | R901 | D2 | RB349 | D1 | RB826 | E3 | RB978 | *E4 |
| R471 | *B3 | R579 | *A2 | R902 | C2 | RB350 | D1 | RB827 | E3 | RB979 | *D4 |
| R472 | *C3 | R580 | *B4 | R903 | D2 | RB351 | C1 | RB828 | C4 | RB980 | *D4 |
| R473 | *C3 | R581 | *B4 | R904 | C2 | RB352 | C1 | RB829 | C4 | RB981 | E4 |
| R474 | A2 | R582 | *E4 | R905 | D2 | RB353 | C1 | RB830 | C4 | RB982 | E4 |
| R475 | A4 | R583 | *E4 | R906 | C2 | RB354 | C1 | RB831 | C4 | RB983 | E4 |
| R476 | C4 | R584 | *E4 | R907 | D2 | RB355 | C1 | RB832 | C4 | RB984 | E4 |
| R477 | C4 | R585 | *E4 | R908 | C2 | RB356 | C1 | RB833 | B2 | RB985 | *D4 |
| R478 | C3 | R586 | *A1 | R909 | C2 | RB357 | *C2 | RB834 | C2 | RB986 | *D4 |
| R479 | C3 | R587 | *A1 | R910 | C2 | RB358 | *B1 | RB835 | C2 | RB987 | *D4 |
| R480 | *C4 | R601 | A4 | R911 | C2 | RB359 | *B1 | RB836 | C2 | RB988 | *D4 |
| R481 | *C4 | R602 | A4 | R912 | C2 | RB360 | *B1 | RB837 | *C3 | RB989 | C4 |
| R482 | *B3 | R603 | A4 | R913 | *D2 | RB361 | *B1 | RB838 | *E4 | RB990 | *C5 |
| R490 | *B3 | R604 | A4 | R914 | *D2 | RB362 | C1 | RB839 | *E4 | RB991 | C4 |
| R491 | *C3 | R605 | *A4 | R915 | *D2 | RB363 | C1 | RB840 | *D1 | RB992 | C4 |
| R501 | *A1 | R606 | *A4 | R916 | *D2 | RB364 | C1 | RB901 | E2 | RB993 | *C5 |
| R502 | *A1 | R607 | *A4 | R917 | *D2 | RB365 | C1 | RB902 | D2 | RB994 | *C5 |
| R503 | *A2 | R608 | *A4 | R918 | *D2 | RB366 | C1 | RB903 | C2 | RB995 | *C5 |
| R504 | *A2 | R609 | *A4 | R919 | *D2 | RB367 | C1 | RB904 | D2 | RB996 | D4 |
| R505 | *A1 | R610 | A3 | R920 | *D2 | RB368 | *E4 | RB905 | D2 | RB997 | D4 |
| R506 | *A2 | R611 | *A3 | R921 | *C2 | RB369 | *E4 | RB906 | E3 | RB998 | D4 |
| R507 | *A1 | R612 | *A3 | R922 | *C2 | RB370 | *E3 | RB907 | E3 | RB999 | D4 |
| R508 | *A2 | R613 | *A3 | R923 | *C2 | RB371 | *E3 | RB908 | E3 | | |
| R509 | A1 | R614 | *A3 | R924 | *C2 | RB372 | *E3 | RB909 | D3 | S13 | A2 |
| R510 | *A2 | R615 | *A3 | R925 | *E5 | RB373 | *E4 | RB910 | C2 | | |
| R511 | *A2 | R616 | *A4 | R926 | *D4 | RB374 | *E4 | RB911 | C2 | THP101 | E5 |
| R512 | *A1 | R617 | *A3 | R927 | E4 | RB375 | *E3 | RB912 | D2 | THP102 | E1 |
| R513 | *A2 | R618 | *A3 | R928 | *D4 | RB376 | *E3 | RB913 | D2 | THP103 | E2 |
| R514 | *A1 | R619 | *A3 | R929 | E4 | RB377 | *E3 | RB914 | D3 | THP104 | E1 |
| R515 | *A2 | R620 | *A3 | R930 | *D4 | RB378 | *E4 | RB915 | D2 | THP105 | E1 |
| R516 | *A2 | R621 | *A3 | R931 | *E5 | RB379 | *E4 | RB916 | D3 | THP106 | E5 |
| R517 | *A1 | R622 | *A3 | R932 | *D4 | RB402 | B2 | RB917 | E2 | | |
| R518 | *A1 | R623 | *A3 | R933 | C4 | RB403 | B2 | RB918 | E3 | TP1 | A3 |
| R519 | *A2 | R624 | *A3 | R934 | C4 | RB404 | B2 | RB919 | D3 | TP2 | B4 |
| R520 | *A1 | R625 | *A3 | R935 | C4 | RB405 | B2 | RB920 | D2 | TP3 | C4 |
| R521 | A1 | R626 | *A3 | R936 | C4 | RB406 | B2 | RB921 | D3 | TP4 | A4 |
| R522 | *A2 | R627 | *A3 | | | RB407 | *B2 | RB922 | D2 | TP501 | B1 |
| R523 | A1 | R628 | *A3 | RB101 | *E1 | RB408 | B2 | RB923 | C2 | TP502 | A2 |
| R524 | A1 | R629 | *A3 | RB102 | *E1 | RB409 | *B1 | RB924 | C3 | | |
| R525 | A1 | R630 | A3 | RB103 | *E1 | RB410 | *B2 | RB925 | C2 | X501 | A1 |
| R526 | A1 | R631 | A3 | RB104 | *E1 | RB411 | B2 | RB926 | C2 | X502 | A1 |
| R527 | A1 | R632 | A3 | RB105 | *E1 | RB412 | B1 | RB927 | C3 | X503 | A1 |
| R528 | A1 | R633 | A3 | RB106 | *D1 | RB413 | B1 | RB928 | C3 | X601 | A4 |
| R529 | A2 | R634 | *A3 | RB107 | *E1 | RB414 | B1 | RB929 | C2 | | |
| R530 | A1 | R635 | *A3 | RB108 | *E1 | RB415 | B1 | RB930 | C2 | *:B SIDE | |

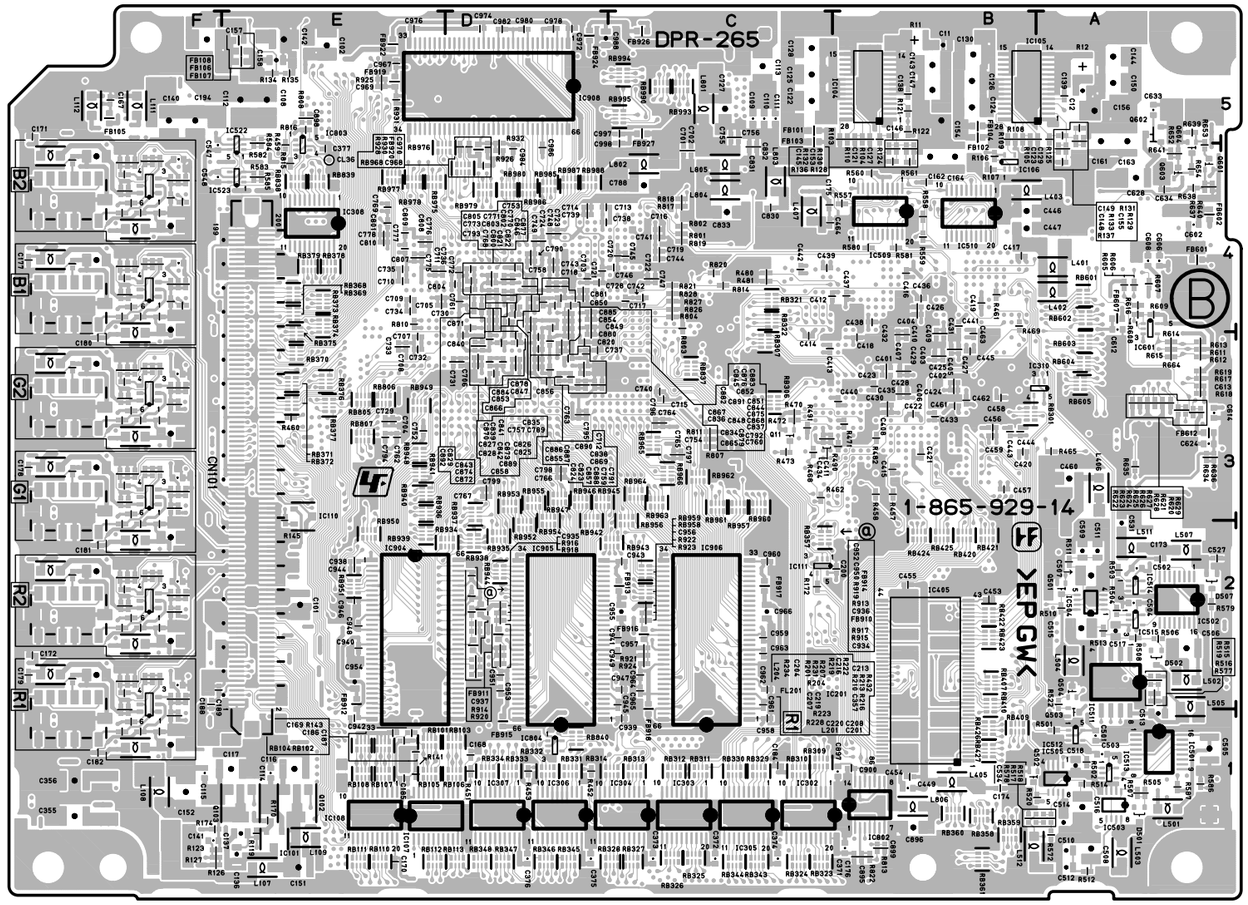DR-528 (1-865-973-14)

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| C1 | *C1 | C71 | B2 | Q8 | *A2 | R40 | C1 |
| C2 | *C1 | C72 | B2 | Q9 | *C1 | R41 | *C1 |
| C3 | *C1 | C73 | B2 | Q10 | *C1 | R42 | B1 |
| C4 | *C1 | C74 | B2 | Q11 | A1 | R43 | B2 |
| C5 | B2 | | | Q12 | *A1 | R44 | B1 |
| C6 | C1 | CN1 | C2 | Q13 | B1 | R45 | B1 |
| C7 | C1 | CN2 | A2 | Q14 | A1 | R46 | B1 |
| C8 | C1 | CN3 | A1 | Q15 | A1 | R47 | B1 |
| C9 | C1 | CN4 | *B1 | Q16 | *B1 | R48 | B1 |
| C10 | A1 | | | Q17 | *A1 | R49 | B1 |
| C11 | C1 | D1 | B2 | Q18 | *A1 | R50 | B1 |
| C12 | C1 | D2 | B2 | Q19 | C1 | R51 | B1 |
| C13 | B1 | D3 | C2 | Q20 | *C2 | R52 | B1 |
| C14 | B1 | D4 | *B2 | Q21 | C1 | R53 | B1 |
| C15 | B1 | D5 | *B2 | Q22 | *C2 | R54 | B1 |
| C16 | B1 | D6 | *B2 | Q23 | B2 | R55 | B1 |
| C17 | *C1 | D7 | *B2 | Q24 | B2 | R56 | B1 |
| C18 | C1 | D8 | B1 | Q25 | A1 | R57 | A1 |
| C19 | C1 | | | Q26 | B2 | R58 | A1 |
| C20 | *C1 | E1 | C1 | Q27 | B2 | R59 | B1 |
| C21 | *A1 | | | Q28 | A1 | R60 | B2 |
| C22 | *C1 | FB1 | *B1 | Q29 | A1 | R61 | B2 |
| C23 | *C1 | FB2 | *B1 | Q30 | A1 | R62 | A1 |
| C24 | *C1 | FB3 | *B1 | Q31 | *A1 | R63 | B1 |
| C25 | *C1 | FB4 | *B1 | Q32 | A1 | R64 | B2 |
| C26 | B2 | FB5 | *A1 | Q33 | *B2 | R65 | B1 |
| C27 | A1 | FB6 | *A1 | Q34 | *B2 | R66 | A1 |
| C28 | *C2 | FB7 | *A1 | Q35 | *A1 | R67 | B1 |
| C29 | C2 | FB8 | *A1 | Q36 | *B2 | R68 | *B1 |
| C30 | *C2 | FB9 | B1 | Q37 | *B2 | R69 | *B2 |
| C31 | C2 | FB10 | B1 | | | R70 | *B2 |
| C32 | C2 | FB11 | B1 | R1 | C2 | R71 | *B2 |
| C33 | *C2 | FB12 | B1 | R2 | C2 | R72 | *B2 |
| C34 | B1 | | | R3 | C2 | R73 | *B2 |
| C35 | B1 | HA001 | A1 | R4 | C2 | R74 | *B2 |
| C36 | *C2 | | | R5 | A2 | R75 | *B2 |
| C37 | *C1 | HB001 | *A1 | R6 | C1 | R76 | *B2 |
| C38 | *A2 | | | R7 | C1 | R77 | *B2 |
| C39 | *C2 | IC1 | C1 | R8 | A2 | R78 | B2 |
| C40 | *B2 | IC2 | B1 | R9 | C1 | R79 | B2 |
| C41 | *B1 | IC3 | A2 | R10 | A2 | R80 | B2 |
| C42 | B2 | IC4 | *A2 | R11 | C1 | R81 | B2 |
| C43 | *B1 | IC5 | B1 | R12 | C1 | R82 | B2 |
| C44 | *B1 | IC6 | B1 | R13 | C1 | R83 | B2 |
| C45 | *B1 | IC7 | B2 | R14 | C1 | R84 | B2 |
| C46 | *B1 | IC8 | B2 | R15 | *A2 | R85 | B2 |
| C47 | B1 | IC9 | B2 | R16 | C1 | R86 | B2 |
| C48 | B1 | IC10 | C1 | R17 | *A2 | R93 | B2 |
| C49 | B1 | IC11 | C1 | R18 | *A2 | R94 | B2 |
| C50 | C1 | IC12 | B1 | R19 | C1 | R95 | B2 |
| C51 | B1 | IC13 | B1 | R20 | C1 | R96 | C1 |
| C52 | A1 | IC14 | C1 | R21 | C1 | R97 | C1 |
| C53 | B2 | | | R22 | C1 | R98 | B1 |
| C54 | A1 | KA001 | A1 | R23 | C1 | R99 | B1 |
| C55 | B1 | | | R24 | C1 | R100 | B1 |
| C56 | A1 | KB001 | *A1 | R25 | A1 | R101 | B1 |
| C57 | *B1 | | | R26 | A1 | | |
| C58 | *B2 | L1 | C2 | R27 | C2 | RB1 | A1 |
| C59 | *B1 | L2 | B2 | R28 | A2 | RB2 | A1 |
| C60 | *B2 | L3 | C2 | R29 | C2 | RB3 | B1 |
| C61 | *B2 | L4 | A2 | R30 | C1 | RB4 | A2 |
| C62 | *B2 | L5 | B2 | R31 | C1 | RB5 | *A2 |
| C63 | *B2 | | | R32 | C2 | | |
| C64 | *B2 | Q1 | A2 | R33 | C2 | *:B SIDE | |
| C65 | *B2 | Q2 | A2 | R34 | C2 | | |
| C66 | *B2 | Q3 | A2 | R35 | C1 | | |
| C67 | B2 | Q4 | *C1 | R36 | C1 | | |
| C68 | B2 | Q5 | *A2 | R37 | *C1 | | |
| C69 | B2 | Q6 | C1 | R38 | C2 | | |
| C70 | B2 | Q7 | *A2 | R39 | C2 | | |




**DR-528** -A SIDE-
SUFFIX: -14




**DR-528** -B SIDE-
SUFFIX: -14

DR-562, DU-369

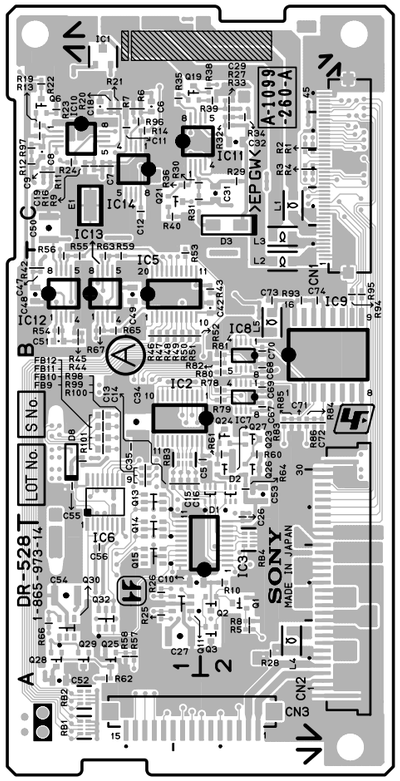DR-562 (1-865-961-11)

| | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| C1 | *C1 | C71 | C2 | FB19 | B1 | Q28 | C2 | R58 | C1 |
| C2 | B2 | C72 | C1 | FB20 | B1 | Q29 | C2 | R59 | C1 |
| C3 | A2 | C73 | C1 | FB21 | B1 | Q30 | C2 | R60 | *B2 |
| C4 | C1 | C74 | C1 | FB22 | B1 | Q31 | C2 | R61 | *B2 |
| C5 | C1 | C75 | C1 | FB23 | B1 | Q32 | C2 | R62 | C1 |
| C6 | C1 | C76 | C1 | FB24 | B1 | Q33 | C2 | R63 | *C2 |
| C7 | C1 | C77 | *C2 | FB25 | B1 | Q34 | C2 | R64 | C1 |
| C8 | *A2 | C78 | *C2 | FB26 | B1 | Q35 | *C2 | R65 | *B2 |
| C9 | B1 | C79 | B1 | FB27 | B1 | Q36 | *B2 | R66 | *B2 |
| C10 | B1 | C80 | B1 | FB28 | B1 | Q37 | *C2 | R67 | *B2 |
| C11 | B1 | C81 | *B2 | FB29 | A1 | Q38 | *B2 | R68 | C1 |
| C12 | B1 | C82 | *C2 | FB30 | A1 | Q39 | *C1 | R69 | *C2 |
| C13 | *C1 | C83 | *B2 | FB31 | A1 | | | R70 | *C2 |
| C14 | B1 | C84 | *B2 | FB32 | A1 | R1 | C2 | R71 | *B2 |
| C15 | B1 | C85 | *C2 | FB33 | A1 | R2 | C2 | R72 | *B2 |
| C16 | B1 | C86 | *B2 | FB34 | A1 | R3 | C2 | R73 | C1 |
| C17 | B1 | C87 | *C2 | FB35 | A1 | R4 | C2 | R74 | *C1 |
| C18 | B1 | C88 | *C2 | FB36 | A1 | R5 | C1 | R75 | *C1 |
| C19 | B1 | C89 | *C1 | | | R6 | C1 | R76 | *C1 |
| C20 | B1 | C90 | B2 | IC1 | B2 | R7 | *A2 | R77 | *C1 |
| C21 | B1 | C91 | B2 | IC2 | B2 | R8 | C1 | R78 | B2 |
| C22 | *C1 | C92 | B2 | IC3 | *C1 | R9 | *A2 | R79 | B2 |
| C23 | *C1 | C93 | C2 | IC4 | *A2 | R10 | *A2 | R80 | B2 |
| C24 | *C2 | C94 | B2 | IC5 | *A2 | R11 | C1 | R81 | C2 |
| C25 | *C2 | C95 | B2 | IC6 | A2 | R12 | *B2 | R82 | B2 |
| C26 | *A2 | C96 | C2 | IC7 | A1 | R13 | *B2 | R83 | B2 |
| C27 | C1 | C97 | C2 | IC8 | C1 | R14 | *B2 | R84 | B2 |
| C28 | C1 | C98 | *B1 | IC9 | B1 | R15 | C1 | R85 | B2 |
| C29 | *B2 | C99 | *B2 | IC10 | B2 | R16 | *A2 | R86 | B2 |
| C30 | *A2 | | | IC11 | B2 | R17 | C1 | R93 | C2 |
| C31 | A2 | CN1 | C2 | IC12 | B2 | R18 | C1 | R94 | C2 |
| C32 | C1 | CN2 | A2 | IC13 | C1 | R19 | *A2 | R95 | C2 |
| C33 | C1 | CN3 | A1 | IC14 | C2 | R20 | C1 | R96 | B1 |
| C34 | *C1 | CN4 | *B1 | IC15 | C1 | R21 | C1 | R97 | B1 |
| C35 | *C1 | | | IC16 | C1 | R22 | C1 | R98 | B1 |
| C36 | *C1 | D1 | *B1 | IC17 | C1 | R23 | C1 | R99 | *B2 |
| C37 | *C2 | D2 | *A1 | IC18 | *B2 | R24 | C1 | R100 | C1 |
| C38 | *C1 | D3 | *A1 | | | R25 | C1 | R101 | *C2 |
| C39 | *C2 | D4 | *A1 | L1 | C2 | R26 | C1 | R102 | *B2 |
| C40 | A1 | D5 | *A1 | L2 | C2 | R27 | C2 | R103 | B2 |
| C41 | A1 | D6 | C2 | L3 | C2 | R28 | *A2 | | |
| C42 | A1 | D7 | A2 | L5 | C2 | R29 | C2 | RB1 | A1 |
| C43 | A2 | D8 | A1 | | | R30 | C2 | RB2 | A1 |
| C44 | A1 | D9 | A2 | Q1 | *A2 | R31 | C2 | RB3 | B2 |
| C45 | C2 | D10 | A1 | Q2 | *A2 | R32 | C2 | RB4 | B2 |
| C46 | C2 | D11 | A1 | Q3 | *A2 | R33 | C2 | RB5 | B2 |
| C47 | *C1 | D12 | *B2 | Q4 | C1 | R34 | C2 | RB6 | *B2 |
| C48 | A1 | D13 | *C2 | Q5 | *B2 | R35 | C2 | RB7 | *A2 |
| C49 | A2 | D14 | B1 | Q6 | *A2 | R36 | C2 | RB8 | *A2 |
| C50 | A2 | | | Q7 | *B2 | R37 | C2 | RB9 | A2 |
| C51 | A2 | E1 | C1 | Q8 | *A2 | R38 | C2 | RB10 | A2 |
| C52 | C2 | | | Q9 | *A2 | R39 | C1 | RB11 | A1 |
| C53 | C2 | FB1 | *B1 | Q10 | C1 | R40 | C2 | | |
| C54 | B1 | FB2 | *B1 | Q11 | C1 | R41 | C2 | *:B SIDE | |
| C55 | B1 | FB3 | *B1 | Q12 | A2 | R42 | C2 | | |
| C56 | B1 | FB4 | *B1 | Q13 | A2 | R43 | C1 | | |
| C57 | B1 | FB5 | *B1 | Q14 | A2 | R44 | C2 | | |
| C58 | B1 | FB6 | *B1 | Q15 | A1 | R45 | C1 | | |
| C59 | B1 | FB7 | *B1 | Q16 | A1 | R46 | C1 | | |
| C60 | B1 | FB8 | *B1 | Q17 | A1 | R47 | B1 | | |
| C61 | B1 | FB9 | *B1 | Q18 | A1 | R48 | B1 | | |
| C62 | B1 | FB10 | *B1 | Q19 | C1 | R49 | B1 | | |
| C63 | B1 | FB11 | *B1 | Q20 | A2 | R50 | B1 | | |
| C64 | B1 | FB12 | *B1 | Q21 | A2 | R51 | B1 | | |
| C65 | B1 | FB13 | *A1 | Q22 | A2 | R52 | C1 | | |
| C66 | *C2 | FB14 | *A1 | Q23 | A1 | R53 | C1 | | |
| C67 | *C2 | FB15 | *A1 | Q24 | A1 | R54 | C1 | | |
| C68 | *C2 | FB16 | *A1 | Q25 | A1 | R55 | C1 | | |
| C69 | *C2 | FB17 | B1 | Q26 | A1 | R56 | C1 | | |
| C70 | C1 | FB18 | B1 | Q27 | C2 | R57 | C1 | | |

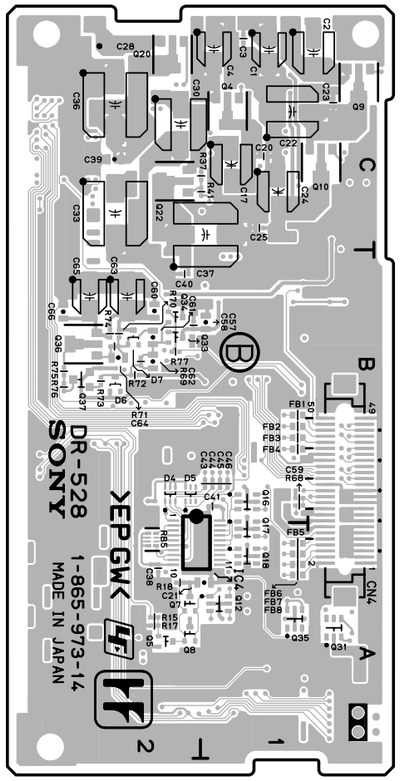


**DR-562** -A SIDE-
SUFFIX: -11




**DR-562** -B SIDE-
SUFFIX: -11

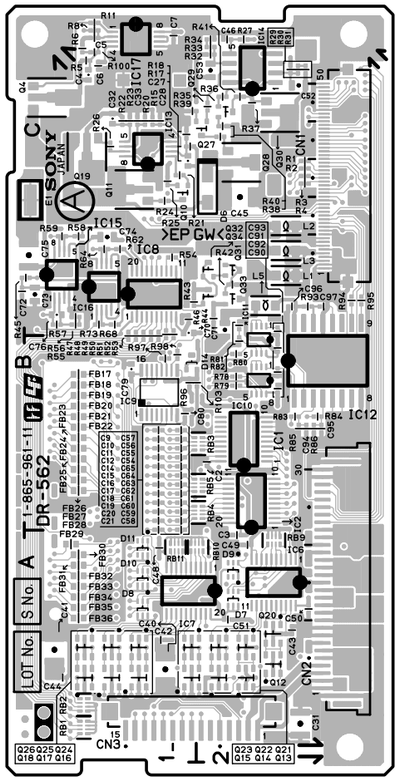


**DU-369** -A SIDE-
SUFFIX: -11

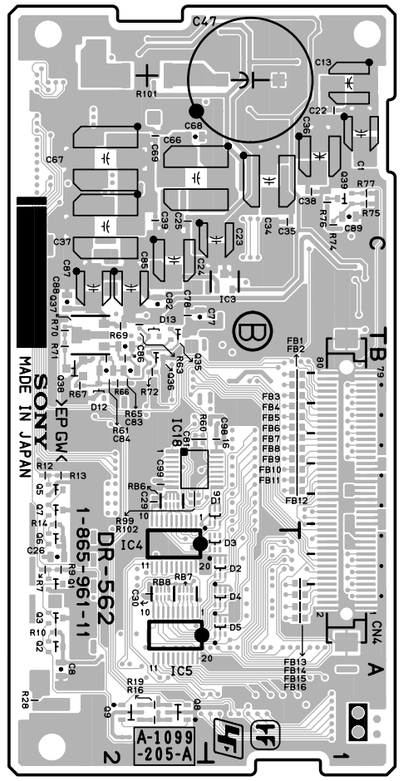


**DU-369** -B SIDE-
SUFFIX: -11




**DU-369** -A SIDE-
SUFFIX: -31




**DU-369** -B SIDE-
SUFFIX: -31

DR-528 (1-865-973-21)

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| C1 | *C1 | C71 | B2 | Q16 | *B1 | R48 | B1 |
| C2 | *C1 | C72 | B2 | Q17 | *A1 | R49 | B1 |
| C3 | *C1 | C73 | B2 | Q18 | *A1 | R50 | B1 |
| C4 | *C1 | C74 | B2 | Q19 | C1 | R51 | B1 |
| C5 | B2 | | | Q20 | *C2 | R52 | B1 |
| C6 | C1 | CN1 | C2 | Q21 | C1 | R53 | B1 |
| C7 | C1 | CN2 | A2 | Q22 | *C2 | R54 | B1 |
| C8 | C1 | CN3 | A1 | Q23 | B2 | R55 | B1 |
| C9 | C1 | CN4 | *B1 | Q24 | B2 | R56 | B1 |
| C10 | A1 | | | Q25 | A1 | R57 | A1 |
| C11 | C1 | D1 | B2 | Q26 | B2 | R58 | A1 |
| C12 | C1 | D2 | B2 | Q27 | B2 | R59 | B1 |
| C13 | B1 | D3 | C2 | Q28 | A1 | R60 | B2 |
| C14 | B1 | D4 | *B2 | Q29 | A1 | R61 | B2 |
| C15 | B1 | D5 | *B2 | Q30 | A1 | R62 | A1 |
| C16 | B1 | D6 | *B2 | Q31 | *A1 | R63 | B1 |
| C17 | *C1 | D7 | *B2 | Q32 | A1 | R64 | B2 |
| C18 | C1 | D8 | B1 | Q33 | *B2 | R65 | B1 |
| C19 | C1 | | | Q34 | *B2 | R66 | A1 |
| C20 | *C1 | E1 | C1 | Q35 | *A1 | R67 | B1 |
| C21 | *A1 | | | Q36 | *B2 | R68 | *B1 |
| C22 | *C1 | FB1 | *B1 | Q37 | *B2 | R69 | *B2 |
| C23 | *C1 | FB2 | *B1 | | | R70 | *B2 |
| C24 | *C1 | FB3 | *B1 | R1 | C2 | R71 | *B2 |
| C25 | *C1 | FB4 | *B1 | R2 | C2 | R72 | *B2 |
| C26 | B2 | FB5 | *A1 | R3 | C2 | R73 | *B2 |
| C27 | A1 | FB6 | *A1 | R4 | C2 | R74 | *B2 |
| C28 | *C2 | FB7 | *A1 | R5 | A2 | R75 | *B2 |
| C29 | C2 | FB8 | *A1 | R6 | C1 | R76 | *B2 |
| C30 | *C2 | FB9 | B1 | R7 | C1 | R77 | *B2 |
| C31 | C2 | FB10 | B1 | R8 | A2 | R78 | B2 |
| C32 | C2 | FB11 | B1 | R9 | C1 | R79 | B2 |
| C33 | *C2 | FB12 | B1 | R10 | A2 | R80 | B2 |
| C34 | B1 | | | R11 | C1 | R81 | B2 |
| C35 | B1 | IC1 | C1 | R12 | C1 | R82 | B2 |
| C36 | *C2 | IC2 | B1 | R13 | C1 | R83 | B2 |
| C37 | *C1 | IC3 | A2 | R14 | C1 | R84 | B2 |
| C38 | *A2 | IC4 | *A2 | R15 | *A2 | R85 | B2 |
| C39 | *C2 | IC5 | B1 | R16 | C1 | R86 | B2 |
| C40 | *B2 | IC6 | B1 | R17 | *A2 | R93 | B2 |
| C41 | *B1 | IC7 | B2 | R18 | *A2 | R94 | B2 |
| C42 | B2 | IC8 | B2 | R19 | C1 | R95 | B2 |
| C43 | *B1 | IC9 | B2 | R20 | C1 | R96 | C1 |
| C44 | *B1 | IC10 | C1 | R21 | C1 | R97 | C1 |
| C45 | *B1 | IC11 | C1 | R22 | C1 | R98 | B1 |
| C46 | *B1 | IC12 | B1 | R23 | C1 | R99 | B1 |
| C47 | B1 | IC13 | B1 | R24 | C1 | R100 | B1 |
| C48 | B1 | IC14 | C1 | R25 | A1 | R101 | B1 |
| C49 | B1 | | | R26 | A1 | | |
| C50 | C1 | L1 | C2 | R27 | C2 | RB1 | A1 |
| C51 | B1 | L2 | B2 | R28 | A2 | RB2 | A1 |
| C52 | A1 | L3 | C2 | R29 | C2 | RB3 | B1 |
| C53 | B2 | L4 | A2 | R30 | C1 | RB4 | A2 |
| C54 | A1 | L5 | B2 | R31 | C1 | RB5 | *A2 |
| C55 | B1 | | | R32 | C2 | | |
| C56 | A1 | Q1 | A2 | R33 | C2 | *:B SIDE | |
| C57 | *B1 | Q2 | A2 | R34 | C2 | | |
| C58 | *B2 | Q3 | A2 | R35 | C1 | | |
| C59 | *B1 | Q4 | *C1 | R36 | C1 | | |
| C60 | *B2 | Q5 | *A2 | R37 | *C1 | | |
| C61 | *B2 | Q6 | C1 | R38 | C2 | | |
| C62 | *B2 | Q7 | *A2 | R39 | C2 | | |
| C63 | *B2 | Q8 | *A2 | R40 | C1 | | |
| C64 | *B2 | Q9 | *C1 | R41 | *C1 | | |
| C65 | *B2 | Q10 | *C1 | R42 | B1 | | |
| C66 | *B2 | Q11 | A1 | R43 | B2 | | |
| C67 | B2 | Q12 | *A1 | R44 | B1 | | |
| C68 | B2 | Q13 | B1 | R45 | B1 | | |
| C69 | B2 | Q14 | A1 | R46 | B1 | | |
| C70 | B2 | Q15 | A1 | R47 | B1 | | |




**DR-528** -A SIDE-
SUFFIX: -21




**DR-528** -B SIDE-
SUFFIX: -21

DR-562 (1-865-961-21)
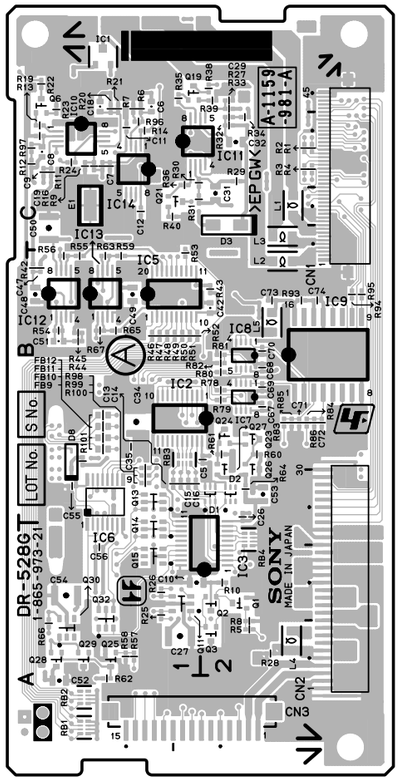
| | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| C1 | *C1 | C71 | C2 | FB19 | B1 | Q26 | A1 | R56 | C1 |
| C2 | B2 | C72 | C1 | FB20 | B1 | Q27 | C2 | R57 | C1 |
| C3 | A2 | C73 | C1 | FB21 | B1 | Q28 | C2 | R58 | C1 |
| C4 | C1 | C74 | C1 | FB22 | B1 | Q29 | C2 | R59 | C1 |
| C5 | C1 | C75 | C1 | FB23 | B1 | Q30 | C2 | R60 | *B2 |
| C6 | C1 | C76 | C1 | FB24 | B1 | Q31 | C2 | R61 | *B2 |
| C7 | C1 | C77 | *C2 | FB25 | B1 | Q32 | C2 | R62 | C1 |
| C8 | *A2 | C78 | *C2 | FB26 | B1 | Q33 | C2 | R63 | *C2 |
| C9 | B1 | C79 | B1 | FB27 | B1 | Q34 | C2 | R64 | C1 |
| C10 | B1 | C80 | B1 | FB28 | B1 | Q35 | *C2 | R65 | *B2 |
| C11 | B1 | C81 | *B2 | FB29 | A1 | Q36 | *B2 | R66 | *B2 |
| C12 | B1 | C82 | *C2 | FB30 | A1 | Q37 | *C2 | R67 | *B2 |
| C13 | *C1 | C83 | *B2 | FB31 | A1 | Q38 | *B2 | R68 | C1 |
| C14 | B1 | C84 | *B2 | FB32 | A1 | Q39 | *C1 | R69 | *C2 |
| C15 | B1 | C85 | *C2 | FB33 | A1 | | | R70 | *C2 |
| C16 | B1 | C86 | *B2 | FB34 | A1 | R1 | C2 | R71 | *B2 |
| C17 | B1 | C87 | *C2 | FB35 | A1 | R2 | C2 | R72 | *B2 |
| C18 | B1 | C88 | *C2 | FB36 | A1 | R3 | C2 | R73 | C1 |
| C19 | B1 | C89 | *C1 | | | R4 | C2 | R74 | *C1 |
| C20 | B1 | C90 | B2 | HB001 | *A1 | R5 | C1 | R75 | *C1 |
| C21 | B1 | C91 | B2 | | | R6 | C1 | R76 | *C1 |
| C22 | *C1 | C92 | B2 | IC1 | B2 | R7 | *A2 | R77 | *C1 |
| C23 | *C1 | C93 | C2 | IC2 | B2 | R8 | C1 | R78 | B2 |
| C24 | *C2 | C94 | B2 | IC3 | *C1 | R9 | *A2 | R79 | B2 |
| C25 | *C2 | C95 | B2 | IC4 | *A2 | R10 | *A2 | R80 | B2 |
| C26 | *A2 | C96 | C2 | IC5 | *A2 | R11 | C1 | R81 | C2 |
| C27 | C1 | C97 | C2 | IC6 | A2 | R12 | *B2 | R82 | B2 |
| C28 | C1 | C98 | *B1 | IC7 | A1 | R13 | *B2 | R83 | B2 |
| C29 | *B2 | C99 | *B2 | IC8 | C1 | R14 | *B2 | R84 | B2 |
| C30 | *A2 | | | IC9 | B1 | R15 | C1 | R85 | B2 |
| C31 | A2 | CN1 | C2 | IC10 | B2 | R16 | *A2 | R86 | B2 |
| C32 | C1 | CN2 | A2 | IC11 | B2 | R17 | C1 | R93 | C2 |
| C33 | C1 | CN3 | A1 | IC12 | B2 | R18 | C1 | R94 | C2 |
| C34 | *C1 | CN4 | *B1 | IC13 | C1 | R19 | *A2 | R95 | C2 |
| C35 | *C1 | | | IC14 | C2 | R20 | C1 | R96 | B1 |
| C36 | *C1 | D1 | *B1 | IC15 | C1 | R21 | C1 | R97 | B1 |
| C37 | *C2 | D2 | *A1 | IC16 | C1 | R22 | C1 | R98 | B1 |
| C38 | *C1 | D3 | *A1 | IC17 | C1 | R23 | C1 | R99 | *B2 |
| C39 | *C2 | D4 | *A1 | IC18 | *B2 | R24 | C1 | R100 | C1 |
| C40 | A1 | D5 | *A1 | | | R25 | C1 | R101 | *C2 |
| C41 | A1 | D6 | C2 | L1 | C2 | R26 | C1 | R102 | *B2 |
| C42 | A1 | D7 | A2 | L2 | C2 | R27 | C2 | R103 | B2 |
| C43 | A2 | D8 | A1 | L3 | C2 | R28 | *A2 | | |
| C44 | A1 | D9 | A2 | L5 | C2 | R29 | C2 | RB1 | A1 |
| C45 | C2 | D10 | A1 | | | R30 | C2 | RB2 | A1 |
| C46 | C2 | D11 | A1 | Q1 | *A2 | R31 | C2 | RB3 | B2 |
| C47 | *C1 | D12 | *B2 | Q2 | *A2 | R32 | C2 | RB4 | B2 |
| C48 | A1 | D13 | *C2 | Q3 | *A2 | R33 | C2 | RB5 | B2 |
| C49 | A2 | D14 | B1 | Q4 | C1 | R34 | C2 | RB6 | *B2 |
| C50 | A2 | | | Q5 | *B2 | R35 | C2 | RB7 | *A2 |
| C51 | A2 | E1 | C1 | Q6 | *A2 | R36 | C2 | RB8 | *A2 |
| C52 | C2 | | | Q7 | *B2 | R37 | C2 | RB9 | A2 |
| C53 | C2 | FB1 | *B1 | Q8 | *A2 | R38 | C2 | RB10 | A2 |
| C54 | B1 | FB2 | *B1 | Q9 | *A2 | R39 | C1 | RB11 | A1 |
| C55 | B1 | FB3 | *B1 | Q10 | C1 | R40 | C2 | | |
| C56 | B1 | FB4 | *B1 | Q11 | C1 | R41 | C2 | *:B SIDE | |
| C57 | B1 | FB5 | *B1 | Q12 | A2 | R42 | C2 | | |
| C58 | B1 | FB6 | *B1 | Q13 | A2 | R43 | C1 | | |
| C59 | B1 | FB7 | *B1 | Q14 | A2 | R44 | C2 | | |
| C60 | B1 | FB8 | *B1 | Q15 | A1 | R45 | C1 | | |
| C61 | B1 | FB9 | *B1 | Q16 | A1 | R46 | C1 | | |
| C62 | B1 | FB10 | *B1 | Q17 | A1 | R47 | B1 | | |
| C63 | B1 | FB11 | *B1 | Q18 | A1 | R48 | B1 | | |
| C64 | B1 | FB12 | *B1 | Q19 | C1 | R49 | B1 | | |
| C65 | B1 | FB13 | *A1 | Q20 | A2 | R50 | B1 | | |
| C66 | *C2 | FB14 | *A1 | Q21 | A2 | R51 | B1 | | |
| C67 | *C2 | FB15 | *A1 | Q22 | A2 | R52 | C1 | | |
| C68 | *C2 | FB16 | *A1 | Q23 | A1 | R53 | C1 | | |
| C69 | *C2 | FB17 | B1 | Q24 | A1 | R54 | C1 | | |
| C70 | C1 | FB18 | B1 | Q25 | A1 | R55 | C1 | | |

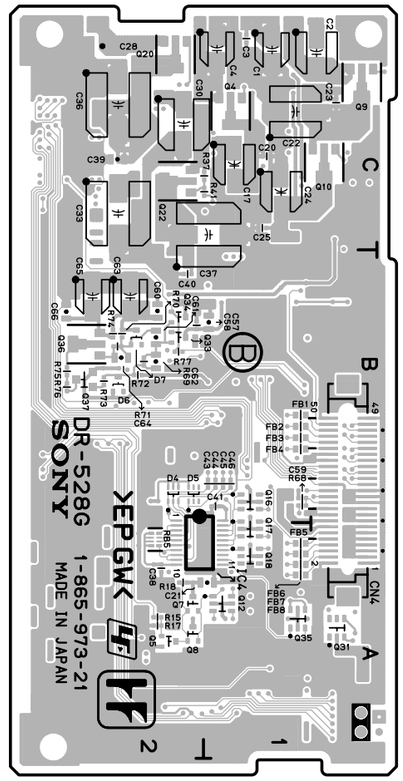


**DR-562** -A SIDE-
SUFFIX: -21




**DR-562** -B SIDE-
SUFFIX: -21

DR-528 (1-865-973-22)
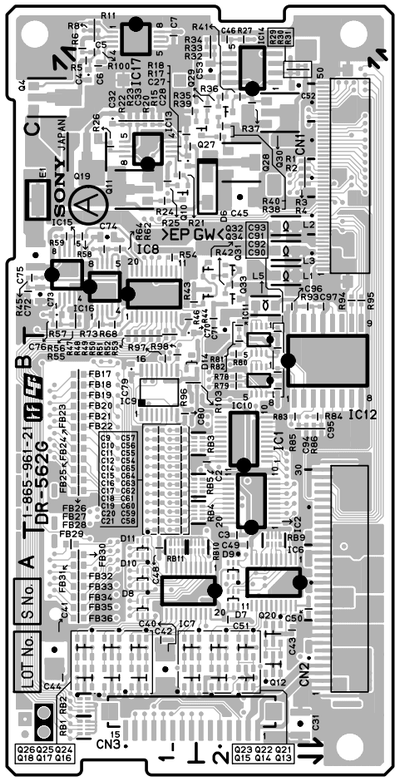
| | | | | | | | |
|---|---|---|---|---|---|---|---|
| C1 | *C1 | C71 | B2 | Q16 | *B1 | R48 | B1 |
| C2 | *C1 | C72 | B2 | Q17 | *A1 | R49 | B1 |
| C3 | *C1 | C73 | B2 | Q18 | *A1 | R50 | B1 |
| C4 | *C1 | C74 | B2 | Q19 | C1 | R51 | B1 |
| C5 | B2 | | | Q20 | *C2 | R52 | B1 |
| C6 | C1 | CN1 | C2 | Q21 | C1 | R53 | B1 |
| C7 | C1 | CN2 | A2 | Q22 | *C2 | R54 | B1 |
| C8 | C1 | CN3 | A1 | Q23 | B2 | R55 | B1 |
| C9 | C1 | CN4 | *B1 | Q24 | B2 | R56 | B1 |
| C10 | A1 | | | Q25 | A1 | R57 | A1 |
| C11 | C1 | D1 | B2 | Q26 | B2 | R58 | A1 |
| C12 | C1 | D2 | B2 | Q27 | B2 | R59 | B1 |
| C13 | B1 | D3 | C2 | Q28 | A1 | R60 | B2 |
| C14 | B1 | D4 | *B2 | Q29 | A1 | R61 | B2 |
| C15 | B1 | D5 | *B2 | Q30 | A1 | R62 | A1 |
| C16 | B1 | D6 | *B2 | Q31 | *A1 | R63 | B1 |
| C17 | *C1 | D7 | *B2 | Q32 | A1 | R64 | B2 |
| C18 | C1 | D8 | B1 | Q33 | *B2 | R65 | B1 |
| C19 | C1 | | | Q34 | *B2 | R66 | A1 |
| C20 | *C1 | E1 | C1 | Q35 | *A1 | R67 | B1 |
| C21 | *A1 | | | Q36 | *B2 | R68 | *B1 |
| C22 | *C1 | FB1 | *B1 | Q37 | *B2 | R69 | *B2 |
| C23 | *C1 | FB2 | *B1 | | | R70 | *B2 |
| C24 | *C1 | FB3 | *B1 | R1 | C2 | R71 | *B2 |
| C25 | *C1 | FB4 | *B1 | R2 | C2 | R72 | *B2 |
| C26 | B2 | FB5 | *A1 | R3 | C2 | R73 | *B2 |
| C27 | A1 | FB6 | *A1 | R4 | C2 | R74 | *B2 |
| C28 | *C2 | FB7 | *A1 | R5 | A2 | R75 | *B2 |
| C29 | C2 | FB8 | *A1 | R6 | C1 | R76 | *B2 |
| C30 | *C2 | FB9 | B1 | R7 | C1 | R77 | *B2 |
| C31 | C2 | FB10 | B1 | R8 | A2 | R78 | B2 |
| C32 | C2 | FB11 | B1 | R9 | C1 | R79 | B2 |
| C33 | *C2 | FB12 | B1 | R10 | A2 | R80 | B2 |
| C34 | B1 | | | R11 | C1 | R81 | B2 |
| C35 | B1 | IC1 | C1 | R12 | C1 | R82 | B2 |
| C36 | *C2 | IC2 | B2 | R13 | C1 | R83 | B2 |
| C37 | *C1 | IC3 | A2 | R14 | C1 | R84 | B2 |
| C38 | *A2 | IC4 | *B2 | R15 | *A2 | R85 | B2 |
| C39 | *C2 | IC5 | B1 | R16 | C1 | R86 | B2 |
| C40 | *B2 | IC6 | B1 | R17 | *A2 | R87 | A1 |
| C41 | *B1 | IC7 | B2 | R18 | *A2 | R88 | A1 |
| C42 | B2 | IC8 | B2 | R19 | C1 | R89 | A1 |
| C43 | *B1 | IC9 | B2 | R20 | C1 | R93 | B2 |
| C44 | *B1 | IC10 | C1 | R21 | C1 | R94 | B2 |
| C45 | *B1 | IC11 | C1 | R22 | C1 | R95 | B2 |
| C46 | *B1 | IC12 | B1 | R23 | C1 | R96 | C1 |
| C47 | B1 | IC13 | B1 | R24 | C1 | R97 | C1 |
| C48 | B1 | IC14 | C1 | R25 | A1 | R98 | B1 |
| C49 | B1 | | | R26 | A1 | R99 | B1 |
| C50 | C1 | L1 | C2 | R27 | C2 | R100 | B1 |
| C51 | B1 | L2 | B2 | R28 | A2 | R101 | B1 |
| C52 | A1 | L3 | C2 | R29 | C2 | | |
| C53 | B2 | L4 | A2 | R30 | C1 | RB1 | A1 |
| C54 | A1 | L5 | B2 | R31 | C1 | RB2 | A1 |
| C55 | B1 | | | R32 | C2 | RB3 | B1 |
| C56 | A1 | Q1 | A2 | R33 | C2 | RB4 | A2 |
| C57 | *B1 | Q2 | A2 | R34 | C2 | RB5 | *A2 |
| C58 | *B2 | Q3 | A2 | R35 | C1 | | |
| C59 | *B1 | Q4 | *C1 | R36 | C1 | *:B SIDE | |
| C60 | *B2 | Q5 | *A2 | R37 | *C1 | | |
| C61 | *B2 | Q6 | C1 | R38 | C2 | | |
| C62 | *B2 | Q7 | *A2 | R39 | C2 | | |
| C63 | *B2 | Q8 | *A2 | R40 | C1 | | |
| C64 | *B2 | Q9 | *C1 | R41 | *C1 | | |
| C65 | *B2 | Q10 | *C1 | R42 | B1 | | |
| C66 | *B2 | Q11 | A1 | R43 | B2 | | |
| C67 | B2 | Q12 | *A1 | R44 | B1 | | |
| C68 | B2 | Q13 | B1 | R45 | B1 | | |
| C69 | B2 | Q14 | A1 | R46 | B1 | | |
| C70 | B2 | Q15 | A1 | R47 | B1 | | |

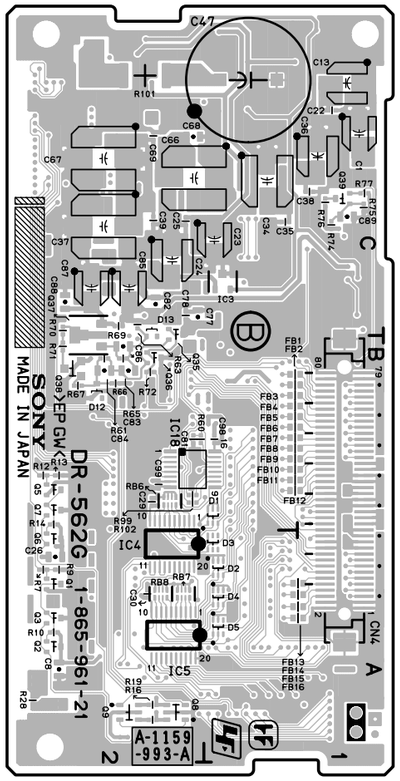


**DR-528** -A SIDE-
SUFFIX: -22




**DR-528** -B SIDE-
SUFFIX: -22

DR-562 (1-865-961-22)
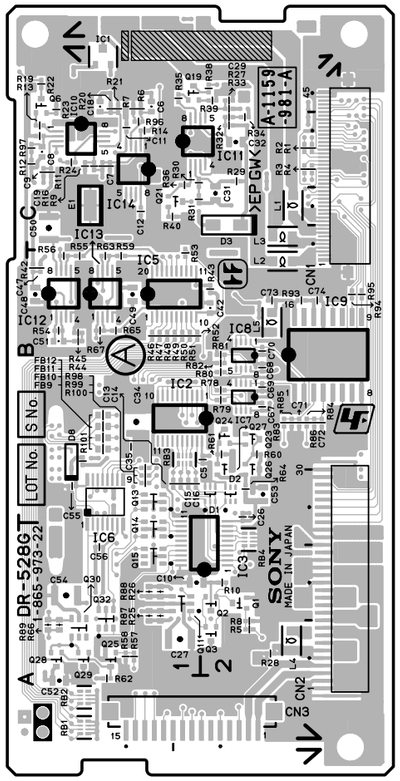
| | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| C1 | *C1 | C71 | C2 | FB19 | B1 | Q28 | C2 | R58 | C1 |
| C2 | B2 | C72 | C1 | FB20 | B1 | Q29 | C2 | R59 | C1 |
| C3 | A2 | C73 | C1 | FB21 | B1 | Q30 | C2 | R60 | *B2 |
| C4 | C1 | C74 | C1 | FB22 | B1 | Q31 | C2 | R61 | *B2 |
| C5 | C1 | C75 | C1 | FB23 | B1 | Q32 | C2 | R62 | C1 |
| C6 | C1 | C76 | C1 | FB24 | B1 | Q33 | C2 | R63 | *C2 |
| C7 | C1 | C77 | *C2 | FB25 | B1 | Q34 | C2 | R64 | C1 |
| C8 | *A2 | C78 | *C2 | FB26 | B1 | Q35 | *C2 | R65 | *B2 |
| C9 | B1 | C79 | B1 | FB27 | B1 | Q36 | *B2 | R66 | *B2 |
| C10 | B1 | C80 | B1 | FB28 | B1 | Q37 | *C2 | R67 | *B2 |
| C11 | B1 | C81 | *B2 | FB29 | A1 | Q38 | *B2 | R68 | C1 |
| C12 | B1 | C82 | *C2 | FB30 | A1 | Q39 | *C1 | R69 | *C2 |
| C13 | *C1 | C83 | *B2 | FB31 | A1 | | | R70 | *C2 |
| C14 | B1 | C84 | *B2 | FB32 | A1 | R1 | C2 | R71 | *B2 |
| C15 | B1 | C85 | *C2 | FB33 | A1 | R2 | C2 | R72 | *B2 |
| C16 | B1 | C86 | *B2 | FB34 | A1 | R3 | C2 | R73 | C1 |
| C17 | B1 | C87 | *C2 | FB35 | A1 | R4 | C2 | R74 | *C1 |
| C18 | B1 | C88 | *C2 | FB36 | A1 | R5 | C1 | R75 | *C1 |
| C19 | B1 | C89 | *C1 | | | R6 | C1 | R76 | *C1 |
| C20 | B1 | C90 | B2 | IC1 | B2 | R7 | *A2 | R77 | *C1 |
| C21 | B1 | C91 | B2 | IC2 | B2 | R8 | C1 | R78 | B2 |
| C22 | *C1 | C92 | B2 | IC3 | *C1 | R9 | *A2 | R79 | B2 |
| C23 | *C1 | C93 | C2 | IC4 | *B2 | R10 | *A2 | R80 | B2 |
| C24 | *C2 | C94 | B2 | IC5 | *A2 | R11 | C1 | R81 | C2 |
| C25 | *C2 | C95 | B2 | IC6 | A2 | R12 | *B2 | R82 | B2 |
| C26 | *A2 | C96 | C2 | IC7 | A2 | R13 | *B2 | R83 | B2 |
| C27 | C1 | C97 | C2 | IC8 | C1 | R14 | *B2 | R84 | B2 |
| C28 | C1 | C98 | *B1 | IC9 | B1 | R15 | C1 | R85 | B2 |
| C29 | *B2 | C99 | *B2 | IC10 | B2 | R16 | A2 | R86 | B2 |
| C30 | *A2 | | | IC11 | B2 | R17 | C1 | R87 | A2 |
| C31 | A2 | CN1 | C2 | IC12 | B2 | R18 | C1 | R88 | A2 |
| C32 | C1 | CN2 | A2 | IC13 | C1 | R19 | A2 | R93 | C2 |
| C33 | C1 | CN3 | A1 | IC14 | C2 | R20 | C1 | R94 | C2 |
| C34 | *C1 | CN4 | *B1 | IC15 | C1 | R21 | C1 | R95 | C2 |
| C35 | *C1 | | | IC16 | C1 | R22 | C1 | R96 | B1 |
| C36 | *C1 | D1 | *B1 | IC17 | C1 | R23 | C1 | R97 | B1 |
| C37 | *C2 | D2 | *A1 | IC18 | *B2 | R24 | C1 | R98 | B1 |
| C38 | *C1 | D3 | *A1 | | | R25 | C1 | R99 | *B2 |
| C39 | *C2 | D4 | *A1 | L1 | C2 | R26 | C1 | R100 | C1 |
| C40 | A1 | D5 | *A1 | L2 | C2 | R27 | C2 | R101 | *C2 |
| C41 | A1 | D6 | C2 | L3 | C2 | R28 | *A2 | R102 | *B2 |
| C42 | A1 | D7 | A2 | L5 | C2 | R29 | C2 | R103 | B2 |
| C43 | A2 | D8 | A1 | | | R30 | C2 | | |
| C44 | A1 | D9 | A2 | Q1 | *A2 | R31 | C2 | RB1 | A1 |
| C45 | C2 | D10 | A1 | Q2 | *A2 | R32 | C2 | RB2 | A1 |
| C46 | C2 | D11 | A1 | Q3 | *A2 | R33 | C2 | RB3 | B2 |
| C47 | *C1 | D12 | *B2 | Q4 | C1 | R34 | C2 | RB4 | B2 |
| C48 | A1 | D13 | *C2 | Q5 | *B2 | R35 | C2 | RB5 | B2 |
| C49 | A2 | D14 | B1 | Q6 | *A2 | R36 | C2 | RB6 | *B2 |
| C50 | A2 | | | Q7 | *B2 | R37 | C2 | RB7 | *A2 |
| C51 | A2 | E1 | C1 | Q8 | *A2 | R38 | C2 | RB8 | *A2 |
| C52 | C2 | | | Q9 | *A2 | R39 | C1 | RB9 | A2 |
| C53 | C2 | FB1 | *B1 | Q10 | C1 | R40 | C2 | RB10 | A2 |
| C54 | B1 | FB2 | *B1 | Q11 | C1 | R41 | C2 | RB11 | A1 |
| C55 | B1 | FB3 | *B1 | Q12 | A2 | R42 | C2 | | |
| C56 | B1 | FB4 | *B1 | Q13 | A2 | R43 | C1 | *:B SIDE | |
| C57 | B1 | FB5 | *B1 | Q14 | A2 | R44 | C2 | | |
| C58 | B1 | FB6 | *B1 | Q15 | A1 | R45 | C1 | | |
| C59 | B1 | FB7 | *B1 | Q16 | A1 | R46 | C1 | | |
| C60 | B1 | FB8 | *B1 | Q17 | A1 | R47 | B1 | | |
| C61 | B1 | FB9 | *B1 | Q18 | A1 | R48 | B1 | | |
| C62 | B1 | FB10 | *B1 | Q19 | C1 | R49 | B1 | | |
| C63 | B1 | FB11 | *B1 | Q20 | A2 | R50 | B1 | | |
| C64 | B1 | FB12 | *B1 | Q21 | A2 | R51 | B1 | | |
| C65 | B1 | FB13 | *A1 | Q22 | A2 | R52 | C1 | | |
| C66 | *C2 | FB14 | *A1 | Q23 | A1 | R53 | C1 | | |
| C67 | *C2 | FB15 | *A1 | Q24 | A1 | R54 | C1 | | |
| C68 | *C2 | FB16 | *A1 | Q25 | A1 | R55 | C1 | | |
| C69 | *C2 | FB17 | B1 | Q26 | A1 | R56 | C1 | | |
| C70 | C1 | FB18 | B1 | Q27 | C2 | R57 | C1 | | |

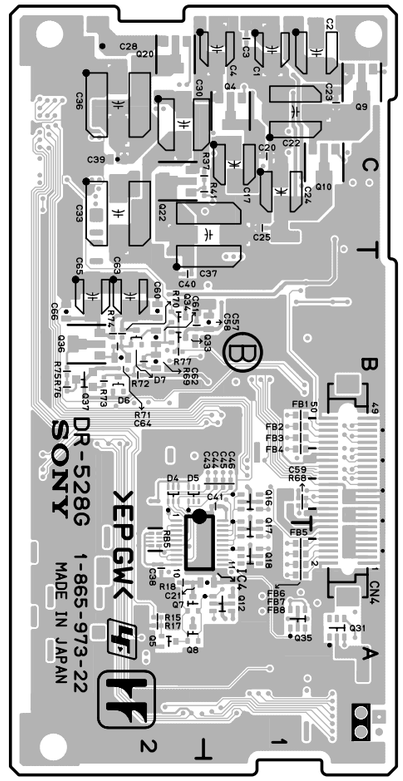


**DR-562** -A SIDE-
SUFFIX: -22




**DR-562** -B SIDE-
SUFFIX: -22

FL-337 (1-868-411-11,31)
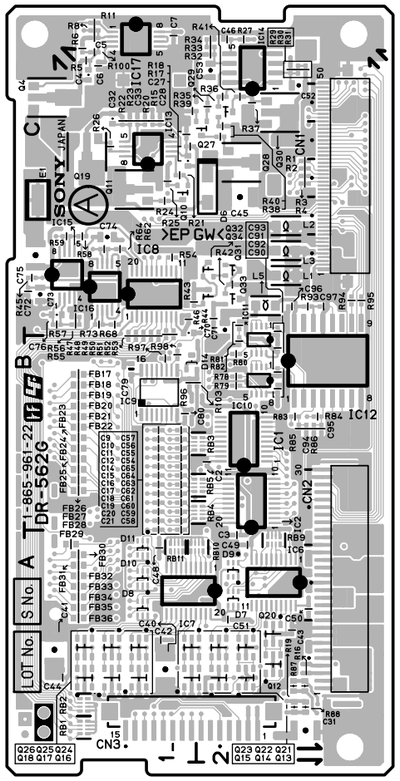
| | |
|---|---|
| C1 | A1 |
| C2 | A1 |
| C3 | B1 |
| CN1 | A1 |
| CN2 | A1 |
| CN3 | B1 |
| FB1 | B1 |
| FB2 | B1 |
| FB3 | B1 |
| L1 | A1 |
| L2 | A1 |

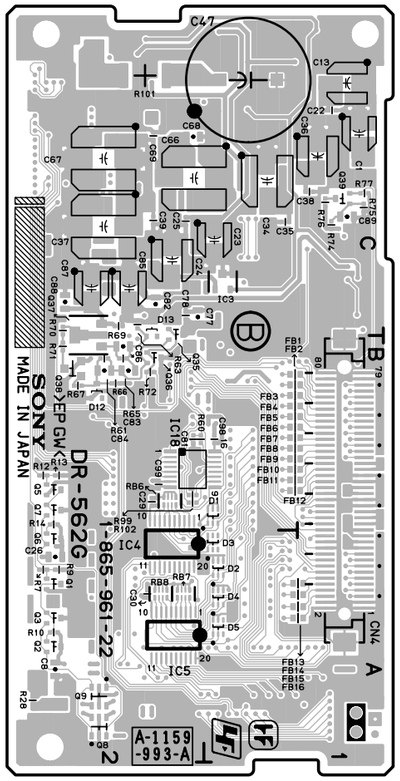


**FL-337** -A SIDE-
SUFFIX: -11, 31




**FL-337** -B SIDE-
SUFFIX: -11, 31

FL-338 (1-868-492-11,31)
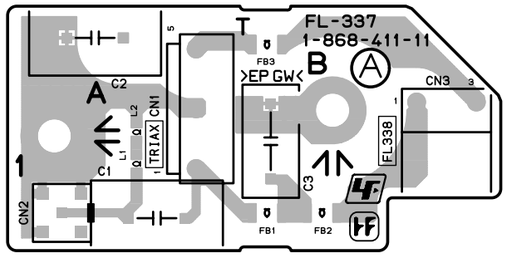
| | |
|---|---|
| C1 | A1 |
| C2 | A1 |
| C3 | B1 |
| CN1 | A1 |
| CN2 | A1 |
| CN3 | B1 |
| CN4 | B1 |
| FB1 | A1 |
| FB2 | B1 |
| FB3 | A1 |
| FB4 | B1 |
| L1 | A1 |
| L2 | B1 |
| L3 | A1 |
| L4 | B1 |
| L5 | B1 |

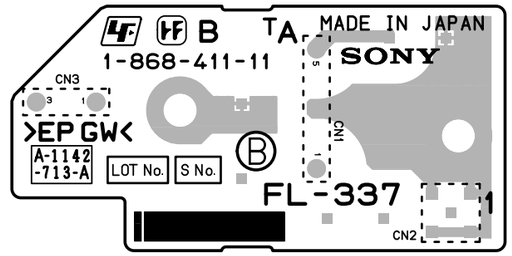


**FL-338** -A SIDE-
SUFFIX: -11, 31




**FL-338** -B SIDE-
SUFFIX: -11, 31

LE-291, LE-308, LE-309

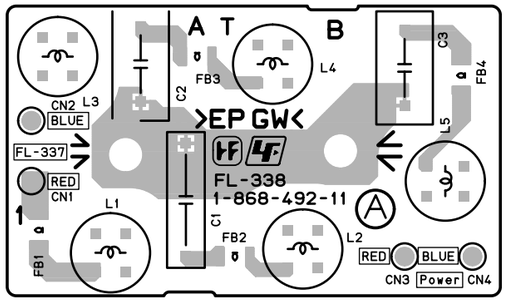LE-291 (1-867-407-11,31)

| | | | | | |
|---|---|---|---|---|---|
| C1 | A1 | Q1 | *B2 | R29 | *A1 |
| C2 | B1 | Q2 | *B2 | R30 | *A1 |
| C3 | C1 | Q3 | *B2 | R31 | *B1 |
| C4 | B1 | Q4 | *B2 | R32 | *B1 |
| C5 | A2 | Q5 | *B1 | R33 | *B1 |
| C6 | C1 | Q6 | *B1 | R34 | *B1 |
| C7 | B1 | Q7 | *B1 | R35 | *B1 |
| C8 | C2 | Q8 | *B1 | R36 | *B1 |
| C9 | C2 | Q9 | A1 | R37 | B2 |
| C10 | C2 | Q10 | B1 | R38 | B2 |
| C11 | *B1 | Q11 | B1 | R39 | B2 |
| C12 | *B1 | Q12 | B1 | R40 | B2 |
| C13 | *A2 | Q13 | *B2 | R41 | B2 |
| C14 | *A2 | Q14 | *B2 | R42 | B2 |
| C15 | B1 | Q15 | *B2 | R43 | C2 |
| C16 | B1 | Q16 | *C2 | R44 | C2 |
| C17 | A2 | Q17 | *B2 | R45 | *B1 |
| C18 | C2 | Q18 | *B2 | R46 | *B1 |
| C19 | A1 | Q19 | *B2 | R47 | *B1 |
| | | Q20 | *B2 | R48 | *B1 |
| CN1 | A1 | Q21 | *B1 | R49 | *B1 |
| CN2 | *B2 | Q22 | *B1 | R50 | *B1 |
| | | Q23 | *B1 | R51 | *B1 |
| D1 | A1 | Q24 | *B1 | R52 | *B1 |
| D2 | *C2 | Q25 | A1 | R53 | B2 |
| D3 | *C2 | Q26 | B1 | R54 | B2 |
| D4 | *C1 | Q27 | B1 | R55 | B2 |
| D5 | *C1 | Q28 | B1 | R56 | B2 |
| D6 | *C1 | Q29 | *B2 | R57 | B2 |
| D7 | *C2 | Q30 | *B2 | R58 | B2 |
| D8 | *C2 | Q31 | *B2 | R59 | C2 |
| D9 | *C2 | Q32 | *C2 | R60 | C2 |
| D10 | *C2 | Q33 | *B1 | R61 | C1 |
| D11 | *C2 | Q34 | *B1 | R62 | C2 |
| D12 | *C1 | Q35 | *B1 | R63 | C1 |
| D13 | *C1 | Q36 | *B1 | R64 | C1 |
| D14 | *C1 | Q37 | *B1 | R65 | C1 |
| D15 | *C1 | Q38 | *B1 | R66 | C1 |
| D16 | *C1 | Q39 | *B1 | R67 | A1 |
| D17 | *C2 | Q40 | *B1 | R68 | A2 |
| D18 | *C2 | Q41 | B2 | R69 | A2 |
| D19 | *C2 | Q42 | B2 | R70 | A2 |
| D20 | *C2 | Q43 | B2 | R71 | A2 |
| D21 | *C2 | Q44 | B2 | R72 | A1 |
| D22 | *C2 | Q45 | B2 | R73 | C1 |
| D23 | *C1 | Q46 | B2 | R74 | A1 |
| D24 | *C1 | Q47 | B2 | R75 | A1 |
| D25 | *C1 | Q48 | B2 | R76 | A1 |
| D26 | *C1 | Q49 | C1 | R77 | A1 |
| D27 | *B2 | Q50 | C2 | R78 | A1 |
| D28 | *B2 | Q51 | C1 | | |
| D29 | *C2 | Q52 | C1 | SL1 | A1 |
| D30 | *C2 | Q53 | C1 | SL2 | C1 |
| D31 | *C2 | Q54 | C2 | | |
| D32 | *B2 | Q55 | A2 | *:B SIDE | |
| D33 | *B2 | Q56 | A2 | | |
| D34 | *A2 | Q57 | A2 | | |
| D35 | *A2 | Q58 | A2 | | |
| D36 | *A2 | Q59 | A2 | | |
| D37 | *A2 | Q60 | A1 | | |
| D38 | *A1 | Q61 | A1 | | |
| D39 | *A1 | Q62 | A1 | | |
| D40 | *A1 | Q63 | A1 | | |
| D41 | *A1 | | | | |
| D42 | *A1 | R1 | A1 | | |
| D43 | *A1 | R2 | A1 | | |
| D44 | *A1 | R3 | A1 | | |
| D45 | *A1 | R4 | A1 | | |
| D46 | *A1 | R5 | A1 | | |
| D47 | *A2 | R6 | A1 | | |
| D48 | *A2 | R7 | A1 | | |
| D49 | *A2 | R8 | A1 | | |
| D50 | *A2 | R9 | A2 | | |
| D51 | *A2 | R10 | C1 | | |
| D52 | *A2 | R11 | B1 | | |
| D53 | *A2 | R12 | C2 | | |
| D54 | *A2 | R13 | *B2 | | |
| D55 | *A2 | R14 | *B2 | | |
| D56 | *A2 | R15 | *B2 | | |
| D57 | *A2 | R16 | *B2 | | |
| D58 | *A2 | R17 | *B2 | | |
| D59 | *A1 | R18 | *B2 | | |
| D60 | *A1 | R19 | *B2 | | |
| D61 | *A1 | R20 | *B2 | | |
| | | R21 | *C1 | | |
| IC1 | B2 | R22 | *C1 | | |
| IC2 | B1 | R23 | *C1 | | |
| IC3 | B1 | R24 | *C1 | | |
| IC4 | C2 | R25 | *B1 | | |
| | | R26 | *B1 | | |
| L1 | A1 | R27 | *B1 | | |
| L2 | B1 | R28 | *B1 | | |

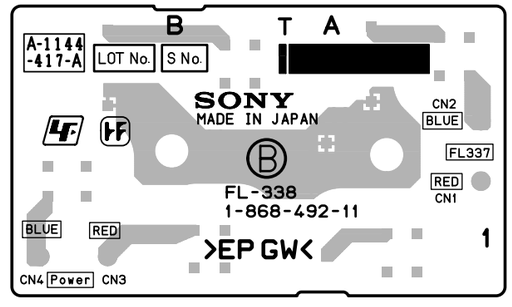


**LE-291** -A SIDE-
SUFFIX: -11, 31




**LE-291** -B SIDE-
SUFFIX: -11, 31

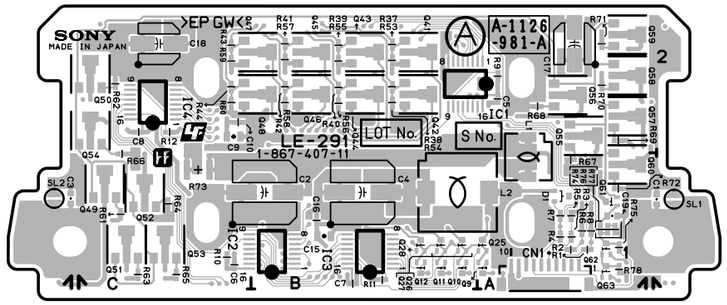


**LE-308** -A SIDE-
SUFFIX: -12, 31

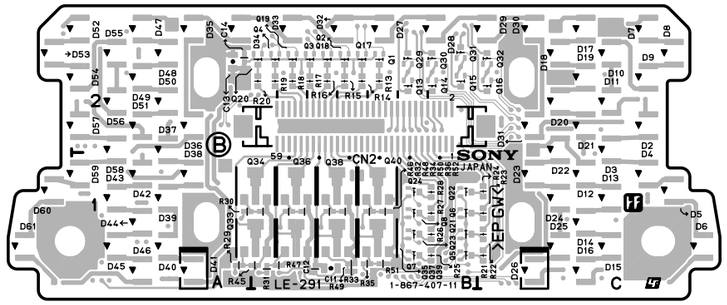


**LE-308** -B SIDE-
SUFFIX: -12, 31



LE-291 (1-867-407-12,32)

| | | | | | |
|---|---|---|---|---|---|
| C2 | B1 | Q3 | *B2 | R31 | *B1 |
| C4 | B1 | Q4 | *B2 | R32 | *B1 |
| C5 | A2 | Q5 | *B1 | R33 | *B1 |
| C6 | C1 | Q6 | *B1 | R34 | *B1 |
| C7 | B1 | Q7 | *B1 | R35 | *B1 |
| C8 | C2 | Q8 | *B1 | R36 | *B1 |
| C9 | C2 | Q9 | A1 | R37 | B2 |
| C10 | C2 | Q10 | B1 | R38 | B2 |
| C11 | *B1 | Q11 | B1 | R39 | B2 |
| C12 | *B1 | Q12 | B1 | R40 | B2 |
| C13 | *A2 | Q13 | *B2 | R41 | B2 |
| C14 | *A2 | Q14 | *B2 | R42 | B2 |
| C15 | B1 | Q15 | *B2 | R43 | C2 |
| C16 | B1 | Q16 | *C2 | R44 | C2 |
| C17 | A2 | Q17 | *B2 | R45 | *B1 |
| C18 | C2 | Q18 | *B2 | R46 | *B1 |
| C19 | A1 | Q19 | *B2 | R47 | *B1 |
| | | Q20 | *B2 | R48 | *B1 |
| CN1 | A1 | Q21 | *B1 | R49 | *B1 |
| CN2 | *B2 | Q22 | *B1 | R50 | *B1 |
| | | Q23 | *B1 | R51 | *B1 |
| D1 | A1 | Q24 | *B1 | R52 | *B1 |
| D2 | *C2 | Q25 | A1 | R53 | B2 |
| D3 | *C2 | Q26 | B1 | R54 | B2 |
| D4 | *C1 | Q27 | B1 | R55 | B2 |
| D5 | *C1 | Q28 | B1 | R56 | B2 |
| D6 | *C1 | Q29 | *B2 | R57 | B2 |
| D7 | *C2 | Q30 | *B2 | R58 | B2 |
| D8 | *C2 | Q31 | *B2 | R59 | C2 |
| D9 | *C2 | Q32 | *C2 | R60 | C2 |
| D10 | *C2 | Q33 | *B1 | R61 | C1 |
| D11 | *C2 | Q34 | *B1 | R62 | C2 |
| D12 | *C1 | Q35 | *B1 | R63 | C1 |
| D13 | *C1 | Q36 | *B1 | R64 | C1 |
| D14 | *C1 | Q37 | *B1 | R65 | C1 |
| D15 | *C1 | Q38 | *B1 | R66 | C1 |
| D16 | *C1 | Q39 | *B1 | R67 | A1 |
| D17 | *C2 | Q40 | *B1 | R68 | A2 |
| D18 | *C2 | Q41 | B2 | R69 | A2 |
| D19 | *C2 | Q42 | B2 | R70 | A2 |
| D20 | *C2 | Q43 | B2 | R71 | A2 |
| D21 | *C2 | Q44 | B2 | R72 | A1 |
| D22 | *C2 | Q45 | B2 | R73 | C1 |
| D23 | *C1 | Q46 | B2 | R74 | A1 |
| D24 | *C1 | Q47 | B2 | R75 | A1 |
| D25 | *C1 | Q48 | B2 | R76 | A1 |
| D26 | *C1 | Q49 | C1 | R77 | A1 |
| D27 | *B2 | Q50 | C2 | R78 | A1 |
| D28 | *B2 | Q51 | C1 | R79 | B1 |
| D29 | *C2 | Q52 | C1 | | |
| D30 | *C2 | Q53 | C1 | *:B SIDE | |
| D31 | *C2 | Q54 | C2 | | |
| D32 | *B2 | Q55 | A2 | | |
| D33 | *B2 | Q56 | A2 | | |
| D34 | *A2 | Q57 | A2 | | |
| D35 | *A2 | Q58 | A2 | | |
| D36 | *A2 | Q59 | A2 | | |
| D37 | *A2 | Q60 | A1 | | |
| D38 | *A1 | Q61 | A1 | | |
| D39 | *A1 | Q62 | A1 | | |
| D40 | *A1 | Q63 | A1 | | |
| D41 | *A1 | | | | |
| D42 | *A1 | R1 | A1 | | |
| D43 | *A1 | R2 | A1 | | |
| D44 | *A1 | R3 | A1 | | |
| D45 | *A1 | R4 | A1 | | |
| D46 | *A1 | R5 | A1 | | |
| D47 | *A2 | R6 | A1 | | |
| D48 | *A2 | R7 | A1 | | |
| D49 | *A2 | R8 | A1 | | |
| D50 | *A2 | R9 | A2 | | |
| D51 | *A2 | R10 | C1 | | |
| D52 | *A2 | R11 | B1 | | |
| D53 | *A2 | R12 | C2 | | |
| D54 | *A2 | R13 | *B2 | | |
| D55 | *A2 | R14 | *B2 | | |
| D56 | *A2 | R15 | *B2 | | |
| D57 | *A2 | R16 | *B2 | | |
| D58 | *A2 | R17 | *B2 | | |
| D59 | *A1 | R18 | *B2 | | |
| D60 | *A1 | R19 | *B2 | | |
| D61 | *A1 | R20 | *B2 | | |
| | | R21 | *C1 | | |
| IC1 | A2 | R22 | *C1 | | |
| IC2 | B1 | R23 | *C1 | | |
| IC3 | B1 | R24 | *C1 | | |
| IC4 | C2 | R25 | *B1 | | |
| | | R26 | *B1 | | |
| L1 | A1 | R27 | *B1 | | |
| | | R28 | *B1 | | |
| Q1 | *B2 | R29 | *A1 | | |
| Q2 | *B2 | R30 | *A1 | | |




**LE-291** -A SIDE-
SUFFIX: -12, 32




**LE-291** -B SIDE-
SUFFIX: -12, 32

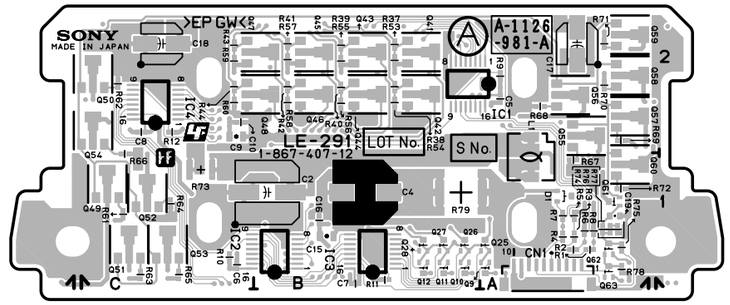


**LE-309** -A SIDE-
SUFFIX: -11, 31



**LE-309** -B SIDE-
SUFFIX: -11, 31

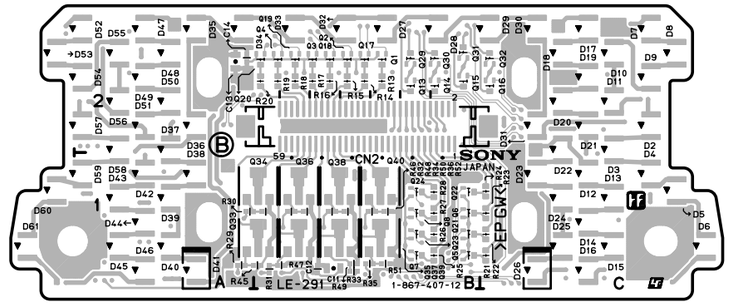


**MB-1059** -A SIDE-
SUFFIX: -14




**MB-1059** -B SIDE-
SUFFIX: -14

MB-1059 (1-865-928-14)
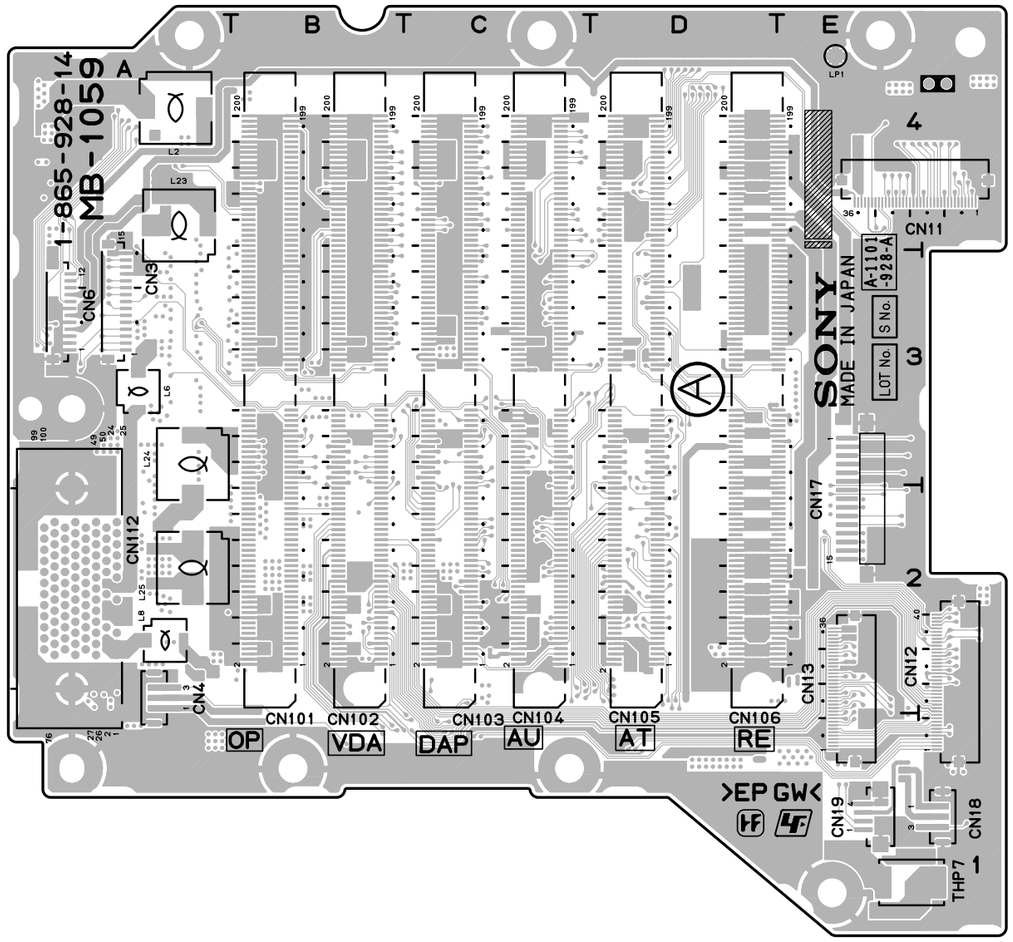
| | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| C1 | *B1 | C26 | *A3 | CN14 | *E1 | L10 | *A2 | R1 | *B3 |
| C2 | *B1 | C27 | *A3 | CN15 | *E1 | L11 | *B4 | R2 | *B3 |
| C3 | *B1 | C28 | *A3 | CN16 | *E1 | L12 | *B2 | | |
| C5 | *E1 | C29 | *E1 | CN17 | E2 | L13 | *B2 | SL1 | *A3 |
| C6 | *E1 | C30 | *E1 | CN18 | E1 | L14 | *B2 | | |
| C7 | *E1 | C31 | *E1 | CN19 | E1 | L15 | *B2 | THP1 | *A4 |
| C8 | *A3 | C32 | *D1 | CN101 | B3 | L16 | *C2 | THP2 | *A3 |
| C9 | *A3 | C33 | *E1 | CN102 | B3 | L17 | *C2 | THP3 | *A4 |
| C10 | *A3 | C34 | *E2 | CN103 | C3 | L18 | *C2 | THP5 | *C3 |
| C11 | *A3 | C35 | *E2 | CN104 | C3 | L19 | *C2 | THP6 | *E2 |
| C12 | *A3 | | | CN105 | D3 | L20 | *D2 | THP7 | E1 |
| C13 | *A4 | CL1 | *E1 | CN106 | D3 | L21 | *D2 | THP8 | *E3 |
| C14 | *A4 | CL2 | *E1 | CN111 | *A3 | L22 | *D3 | THP9 | *E4 |
| C15 | *A4 | | | CN112 | A2 | L23 | A4 | THP11 | *A1 |
| C16 | *A4 | CN1 | *A4 | | | L24 | A3 | THP12 | *A1 |
| C17 | *A4 | CN2 | *A3 | L1 | *A4 | L25 | A2 | THP13 | *A1 |
| C18 | *A4 | CN3 | A3 | L2 | A4 | L26 | *A3 | THP14 | *D4 |
| C19 | *A4 | CN4 | A2 | L3 | *B1 | L27 | *B2 | THP15 | *D4 |
| C20 | *A4 | CN5 | *C1 | L4 | *B2 | L28 | *E1 | THP16 | *D4 |
| C21 | *A4 | CN6 | A3 | L5 | *A2 | L29 | *E2 | THP17 | *D3 |
| C22 | *A4 | CN7 | *A3 | L6 | A3 | L30 | *E1 | | |
| C23 | *A3 | CN11 | E4 | L7 | *B2 | L31 | *E1 | *:B SIDE | |
| C24 | *A3 | CN12 | E2 | L8 | A2 | | | | |
| C25 | *A3 | CN13 | E2 | L9 | *B2 | LP1 | E4 | | |

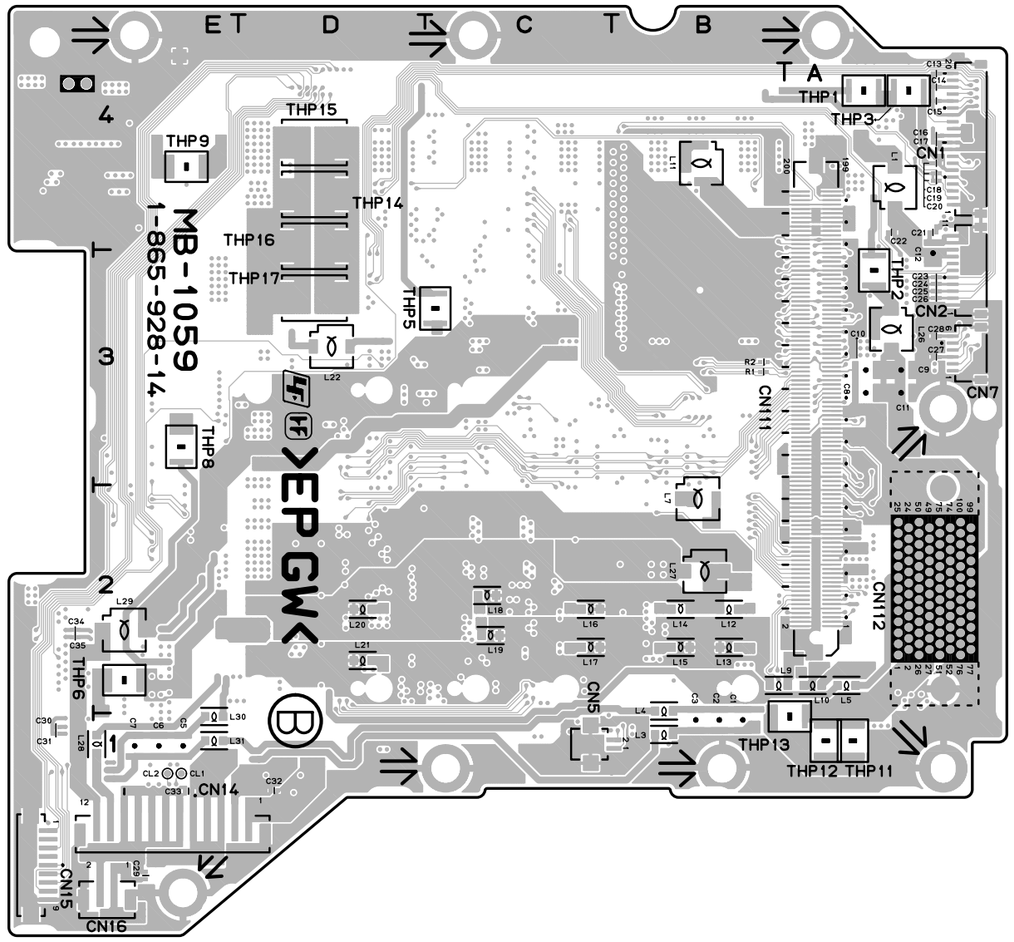


**MB-1059** -A SIDE-
SUFFIX: -15




**MB-1059** -B SIDE-
SUFFIX: -15

MB-1059 (1-865-928-15)
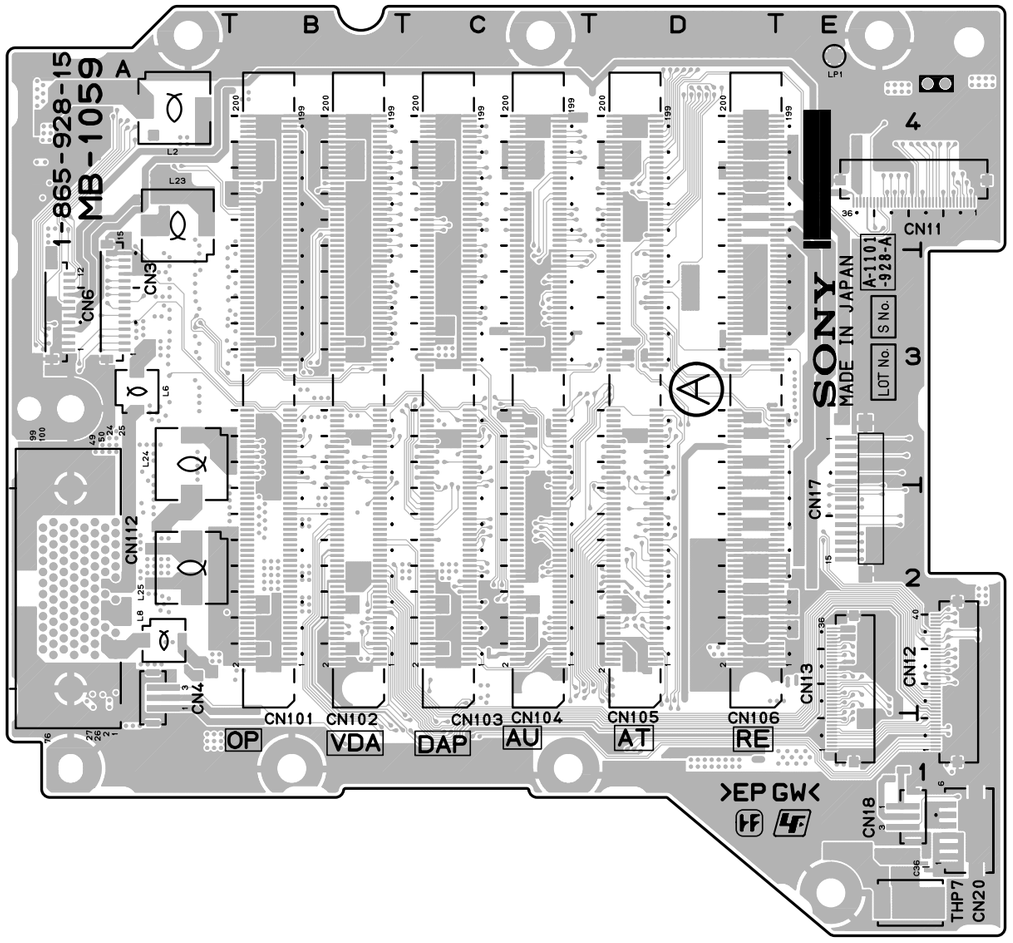
| | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| C1 | *B1 | C26 | *A3 | CN16 | *E1 | L12 | *B2 | R2 | *B3 |
| C2 | *B1 | C27 | *A3 | CN17 | E2 | L13 | *B2 | | |
| C3 | *B1 | C28 | *A3 | CN18 | E1 | L14 | *B2 | SL1 | *A3 |
| C5 | *E1 | C29 | *E1 | CN20 | E1 | L15 | *B2 | | |
| C6 | *E1 | C30 | *E1 | CN101 | B3 | L16 | *C2 | THP1 | *A4 |
| C7 | *E1 | C31 | *E1 | CN102 | B3 | L17 | *C2 | THP2 | *A3 |
| C8 | *A3 | C32 | *D1 | CN103 | C3 | L18 | *C2 | THP3 | *A4 |
| C9 | *A3 | C33 | *E1 | CN104 | C3 | L19 | *C2 | THP5 | *C3 |
| C10 | *A3 | C34 | *E2 | CN105 | D3 | L20 | *D2 | THP7 | E1 |
| C11 | *A3 | C35 | *E2 | CN106 | D3 | L21 | *D2 | THP8 | *E3 |
| C12 | *A3 | C36 | E1 | CN111 | *A3 | L22 | *D3 | THP9 | *E4 |
| C13 | *A4 | | | CN112 | A2 | L23 | A4 | THP11 | *A1 |
| C14 | *A4 | CN1 | *A4 | | | L24 | A3 | THP12 | *A1 |
| C15 | *A4 | CN2 | *A3 | L1 | *A4 | L25 | A2 | THP13 | *A1 |
| C16 | *A4 | CN3 | A3 | L2 | A4 | L26 | *A3 | THP14 | *D4 |
| C17 | *A4 | CN4 | A2 | L3 | *B1 | L27 | *B2 | THP15 | *D4 |
| C18 | *A4 | CN5 | *C1 | L4 | *B2 | L28 | *E1 | THP16 | *D4 |
| C19 | *A4 | CN6 | A3 | L5 | *A2 | L29 | *E2 | THP17 | *D3 |
| C20 | *A4 | CN7 | *A3 | L6 | A3 | L30 | *E1 | | |
| C21 | *A4 | CN11 | E4 | L7 | *B2 | L31 | *E1 | *:B SIDE | |
| C22 | *A4 | CN12 | E2 | L8 | A2 | | | | |
| C23 | *A3 | CN13 | E2 | L9 | *B2 | LP1 | E4 | | |
| C24 | *A3 | CN14 | *E1 | L10 | *A2 | | | | |
| C25 | *A3 | CN15 | *E1 | L11 | *B4 | R1 | *B3 | | |

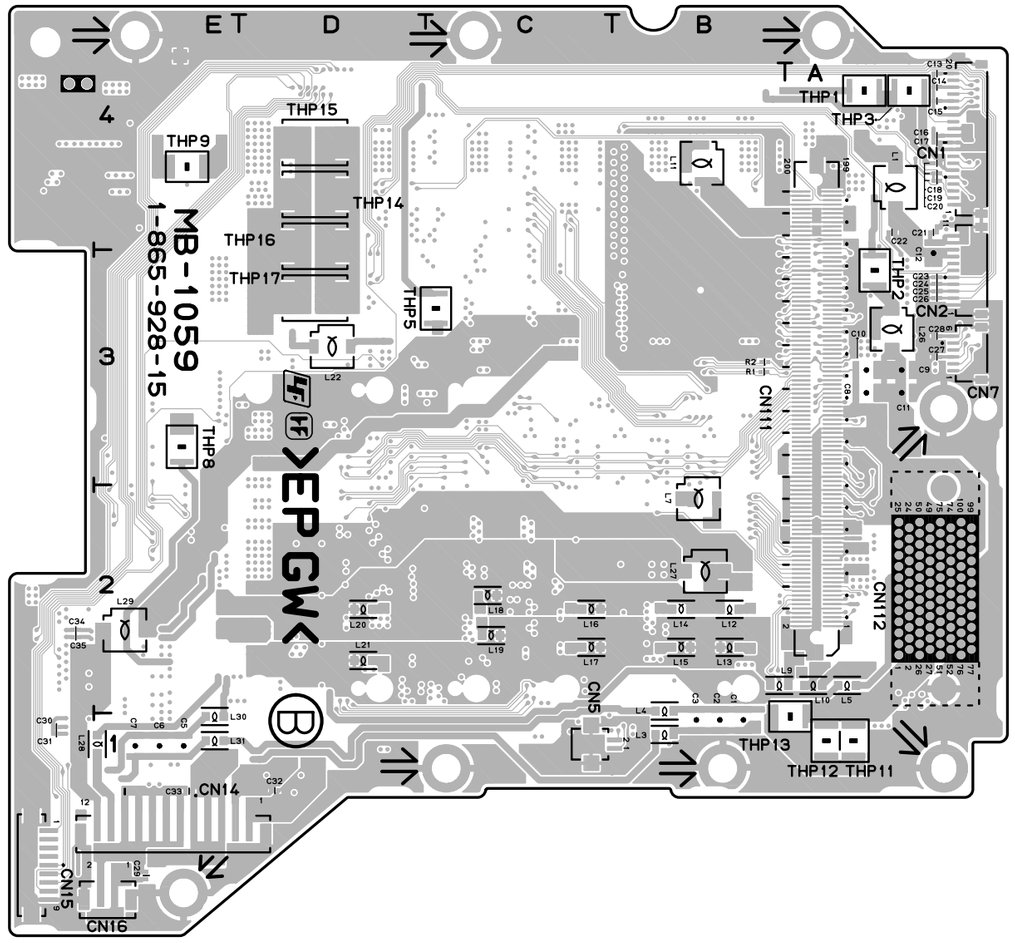


**MB-1059G** -A SIDE-
SUFFIX: -21, 31




**MB-1059G** -B SIDE-
SUFFIX: -21, 31

MB-1059G (1-865-928-21,31)
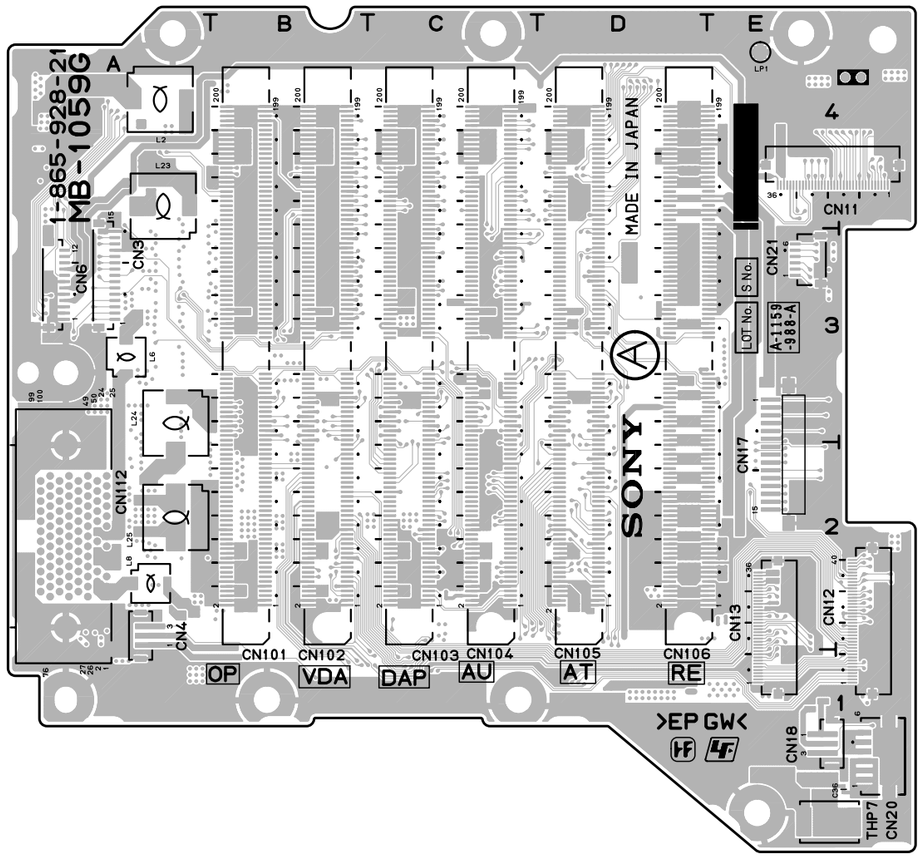
| | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| C1 | *B1 | C26 | *A3 | CN14 | *E1 | L2 | A4 | L26 | *A3 | THP14 | *D4 |
| C2 | *B1 | C27 | *A3 | CN15 | *E1 | L3 | *B1 | L27 | *B2 | THP15 | *D4 |
| C3 | *B1 | C28 | *A3 | CN16 | *E1 | L4 | *B2 | L28 | *E1 | THP16 | *D4 |
| C5 | *E1 | C29 | *E1 | CN17 | E2 | L5 | *A2 | L29 | *E2 | THP17 | *D3 |
| C6 | *E1 | C30 | *E1 | CN18 | E1 | L6 | A3 | L30 | *E1 | | |
| C7 | *E1 | C31 | *E1 | CN20 | E1 | L7 | *B2 | L31 | *E1 | *:B SIDE | |
| C8 | *A3 | C32 | *D1 | CN21 | E3 | L8 | A2 | | | | |
| C9 | *A3 | C33 | *E1 | CN101 | B3 | L9 | *B2 | LP1 | E4 | | |
| C10 | *A3 | C34 | *E2 | CN102 | B3 | L10 | *A2 | | | | |
| C11 | *A3 | C35 | *E2 | CN103 | C3 | L11 | *B4 | R1 | *B3 | | |
| C12 | *A3 | C36 | E1 | CN104 | C3 | L12 | *B2 | R2 | *B3 | | |
| C13 | *A4 | C37 | *E3 | CN105 | D3 | L13 | *B2 | | | | |
| C14 | *A4 | C38 | *E3 | CN106 | D3 | L14 | *B2 | SL1 | *A3 | | |
| C15 | *A4 | | | CN111 | *A3 | L15 | *B2 | | | | |
| C16 | *A4 | CN1 | *A4 | CN112 | A2 | L16 | *C2 | THP1 | *A4 | | |
| C17 | *A4 | CN2 | *A3 | | | L17 | *C2 | THP2 | *A3 | | |
| C18 | *A4 | CN3 | A3 | JC1 | *E3 | L18 | *C2 | THP3 | *A4 | | |
| C19 | *A4 | CN4 | A2 | JC2 | *E3 | L19 | *C2 | THP5 | *C3 | | |
| C20 | *A4 | CN5 | *C1 | JC3 | *E3 | L20 | *D2 | THP7 | E1 | | |
| C21 | *A4 | CN6 | A3 | JC4 | *E3 | L21 | *D2 | THP8 | *E3 | | |
| C22 | *A4 | CN7 | *A3 | JC5 | *E3 | L22 | *D3 | THP9 | *E4 | | |
| C23 | *A3 | CN11 | E4 | JC6 | *E3 | L23 | A4 | THP11 | *A1 | | |
| C24 | *A3 | CN12 | E2 | | | L24 | A3 | THP12 | *A1 | | |
| C25 | *A3 | CN13 | E2 | L1 | *A4 | L25 | A2 | THP13 | *A1 | | |

MB-1060 (1-867-461-12)
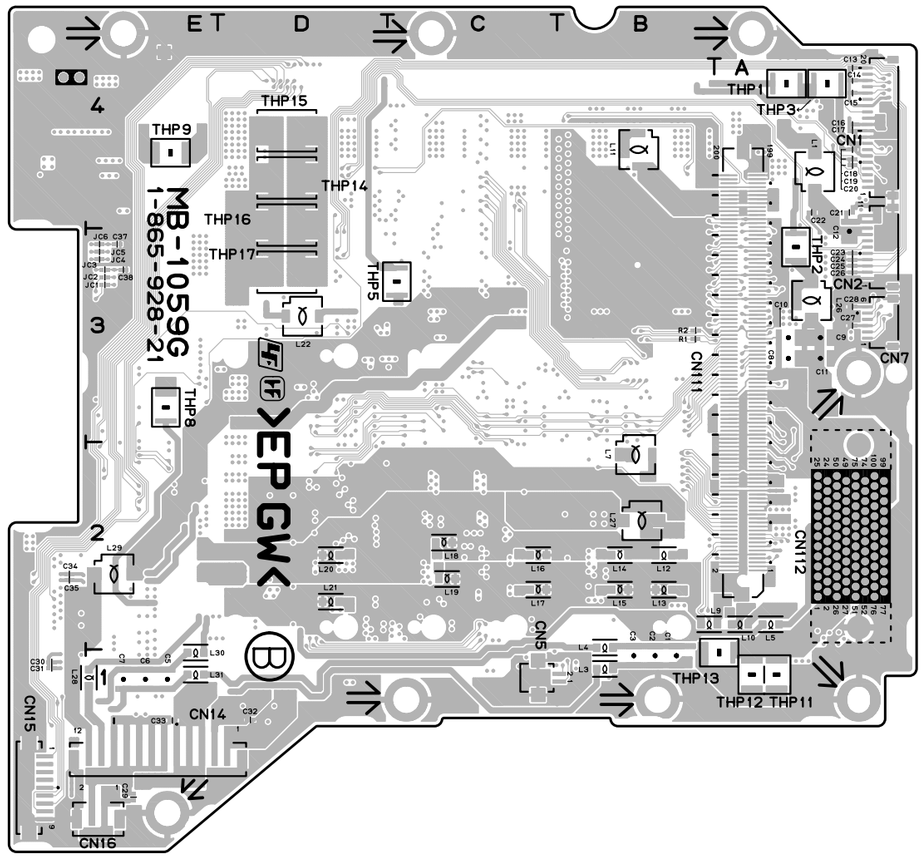
| | | | | | |
|---|---|---|---|---|---|
| C1 | *A5 | FB26 | *A1 | R4 | *F4 |
| C2 | *B5 | FB27 | *A1 | R5 | *F4 |
| C3 | *B5 | | | R6 | *B2 |
| C4 | *B2 | FL1 | *A3 | R7 | *B2 |
| C5 | *F4 | FL2 | *A3 | R8 | *B2 |
| C6 | *B2 | FL3 | *A2 | R9 | *B2 |
| C7 | A5 | FL4 | A2 | R12 | *B2 |
| C8 | A5 | FL5 | *A3 | R13 | *B2 |
| C9 | B5 | FL6 | *A3 | R14 | *A2 |
| C10 | *F5 | FL7 | A2 | | |
| | | FL8 | A2 | RB1 | *B2 |
| CN1 | B1 | FL9 | *A3 | RB2 | *B2 |
| CN2 | A5 | FL10 | *A2 | RB3 | *F4 |
| CN3 | A5 | FL11 | *A2 | RB4 | *B2 |
| CN4 | C1 | FL12 | *A2 | RB5 | *F4 |
| CN5 | F3 | FL13 | *A2 | RB6 | *B2 |
| CN6 | F5 | FL14 | *A2 | RB7 | *F4 |
| CN7 | A3 | FL15 | *A3 | RB8 | *F4 |
| CN8 | A2 | FL16 | *A3 | RB9 | *B2 |
| CN9 | B1 | FL17 | *A3 | RB10 | *B2 |
| CN10 | *G5 | FL18 | A2 | RB11 | *B2 |
| CN11 | *C1 | FL19 | *A2 | RB12 | *B2 |
| CN13 | *G5 | FL20 | *B2 | RB13 | *B1 |
| CN14 | F4 | FL21 | *B2 | RB14 | *B1 |
| CN15 | *G5 | FL22 | *A2 | RB15 | *B1 |
| CN16 | *G5 | FL23 | *A2 | RB16 | *B1 |
| CN17 | A2 | FL24 | *A3 | RB17 | *B1 |
| CN27 | *B1 | FL25 | *A2 | RB18 | *B1 |
| CN28 | D1 | FL26 | *B2 | RB19 | *B1 |
| CN29 | C1 | FL27 | *A2 | RB20 | *B1 |
| CN101 | B4 | FL28 | *B2 | | |
| CN102 | C4 | FL29 | *A2 | THP1 | *D4 |
| CN103 | C4 | FL30 | *A2 | THP2 | *A5 |
| CN104 | D4 | FL31 | *A3 | THP3 | *A5 |
| CN105 | D4 | FL32 | *A2 | | |
| CN106 | E4 | FL33 | *A2 | *:B SIDE | |
| CN111 | *B3 | | | | |
| | | IC2 | F5 | | |
| D1 | *C1 | IC3 | B2 | | |
| D2 | *C1 | IC4 | B1 | | |
| D3 | *A2 | | | | |
| D4 | *F5 | L1 | *B5 | | |
| D5 | *B2 | L2 | *B5 | | |
| D6 | *B1 | L3 | *B5 | | |
| | | L4 | *B3 | | |
| FB1 | *A5 | L5 | *B3 | | |
| FB2 | *A5 | L6 | B5 | | |
| FB3 | *A5 | L7 | B3 | | |
| FB4 | *F4 | L8 | *B2 | | |
| FB5 | *A4 | L9 | *B2 | | |
| FB6 | *A4 | L10 | *C2 | | |
| FB7 | *A4 | L11 | *C2 | | |
| FB8 | *A4 | L12 | *C2 | | |
| FB9 | *A4 | L13 | *C2 | | |
| FB10 | *A4 | L14 | *D2 | | |
| FB11 | *A5 | L15 | *D2 | | |
| FB12 | *F4 | L16 | *D2 | | |
| FB13 | *F4 | L17 | *D2 | | |
| FB14 | *F4 | L18 | *D4 | | |
| FB15 | *F4 | L19 | G5 | | |
| FB16 | *F4 | L20 | G5 | | |
| FB17 | *F3 | | | | |
| FB18 | *F3 | Q1 | *A4 | | |
| FB19 | *F3 | Q2 | *F5 | | |
| FB20 | *B1 | Q3 | *F5 | | |
| FB21 | *A1 | Q4 | *A2 | | |
| FB22 | *B1 | | | | |
| FB23 | *B1 | R1 | *A4 | | |
| FB24 | *B1 | R2 | *F5 | | |
| FB25 | *B1 | R3 | *F5 | | |




**MB-1060** -A SIDE-
SUFFIX: -12




**MB-1060** -B SIDE-
SUFFIX: -12

MB-1060 (1-867-461-21,31)
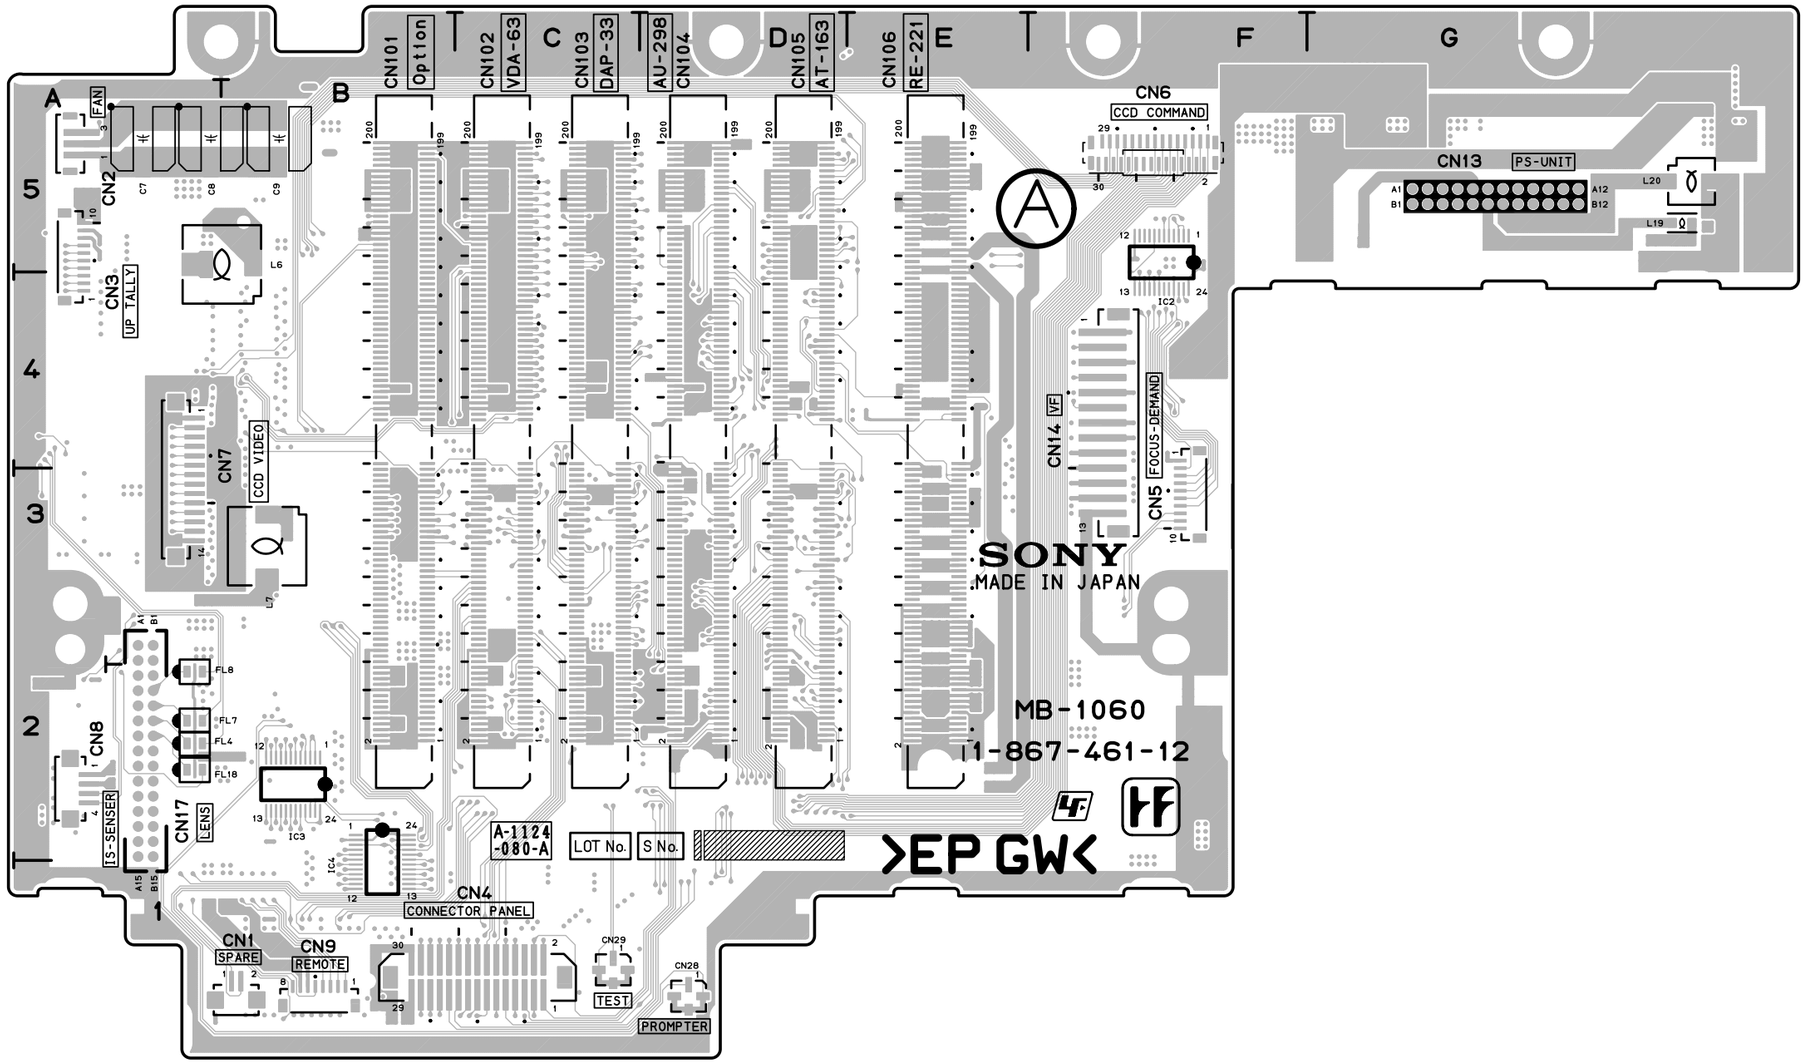
| | | | | | |
|---|---|---|---|---|---|
| C1 | *A5 | FB24 | *B1 | R2 | *F5 |
| C2 | *B5 | FB25 | *B1 | R3 | *F5 |
| C3 | *B5 | FB26 | *A1 | R4 | *F4 |
| C4 | *B2 | FB27 | *A1 | R5 | *F4 |
| C5 | *F4 | | | R6 | *B2 |
| C6 | *B2 | FL1 | *A3 | R7 | *B2 |
| C7 | A5 | FL2 | *A3 | R8 | *B2 |
| C8 | A5 | FL3 | *A2 | R9 | *B2 |
| C9 | B5 | FL4 | A2 | R12 | *B2 |
| C10 | *F5 | FL5 | *A3 | R13 | *B2 |
| | | FL6 | *A3 | R14 | *A2 |
| CN1 | B1 | FL7 | A2 | | |
| CN2 | A5 | FL8 | A2 | RB1 | *B2 |
| CN3 | A5 | FL9 | *A3 | RB2 | *B2 |
| CN4 | C1 | FL10 | *A2 | RB3 | *F4 |
| CN5 | F3 | FL11 | *A2 | RB4 | *B2 |
| CN6 | F5 | FL12 | *A2 | RB5 | *F4 |
| CN7 | A3 | FL13 | *A2 | RB6 | *B2 |
| CN8 | A2 | FL14 | *A2 | RB7 | *F4 |
| CN9 | B1 | FL15 | *A3 | RB8 | *F4 |
| CN10 | *G5 | FL16 | *A3 | RB9 | *B2 |
| CN11 | *C1 | FL17 | *A3 | RB10 | *B2 |
| CN13 | *G5 | FL18 | A2 | RB11 | *B2 |
| CN14 | F4 | FL19 | *A2 | RB12 | *B2 |
| CN15 | *G5 | FL20 | *B2 | RB13 | *B1 |
| CN16 | *G5 | FL21 | *B2 | RB14 | *B1 |
| CN17 | A2 | FL22 | *A2 | RB15 | *B1 |
| CN27 | *B1 | FL23 | *A2 | RB16 | *B1 |
| CN28 | D1 | FL24 | *A3 | RB17 | *B1 |
| CN29 | C1 | FL25 | *A2 | RB18 | *B1 |
| CN101 | B4 | FL26 | *B2 | RB19 | *B1 |
| CN102 | C4 | FL27 | *A2 | RB20 | *B1 |
| CN103 | C4 | FL28 | *B2 | | |
| CN104 | D4 | FL29 | *A2 | THP1 | *D4 |
| CN105 | D4 | FL30 | *A2 | THP2 | *A5 |
| CN106 | E4 | FL31 | *A3 | THP3 | *A5 |
| CN111 | *B3 | FL32 | *A2 | | |
| CN112 | F2 | FL33 | *A2 | *:B SIDE | |
| D1 | *C1 | IC2 | F5 | | |
| D2 | *C1 | IC3 | B2 | | |
| D3 | *A2 | IC4 | B1 | | |
| D4 | *F5 | | | | |
| D5 | *B2 | L1 | *B5 | | |
| D6 | *B1 | L2 | *B5 | | |
| D7 | B1 | L3 | *B5 | | |
| | | L4 | *B3 | | |
| FB1 | *A5 | L5 | *B3 | | |
| FB2 | *A5 | L6 | B5 | | |
| FB3 | *A5 | L7 | B3 | | |
| FB4 | *F4 | L8 | *B2 | | |
| FB5 | *A4 | L9 | *B2 | | |
| FB6 | *A4 | L10 | *C2 | | |
| FB7 | *A4 | L11 | *C2 | | |
| FB8 | *A4 | L12 | *C2 | | |
| FB9 | *A4 | L13 | *C2 | | |
| FB10 | *A4 | L14 | *D2 | | |
| FB11 | *A5 | L15 | *D2 | | |
| FB12 | *F4 | L16 | *D2 | | |
| FB13 | *F4 | L17 | *D2 | | |
| FB14 | *F4 | L18 | *D4 | | |
| FB15 | *F4 | L19 | G5 | | |
| FB16 | *F4 | L20 | G5 | | |
| FB17 | *F3 | | | | |
| FB18 | *F3 | Q1 | *A4 | | |
| FB19 | *F3 | Q2 | *F5 | | |
| FB20 | *B1 | Q3 | *F5 | | |
| FB21 | *A1 | Q4 | *A2 | | |
| FB22 | *B1 | | | | |
| FB23 | *B1 | R1 | *A4 | | |

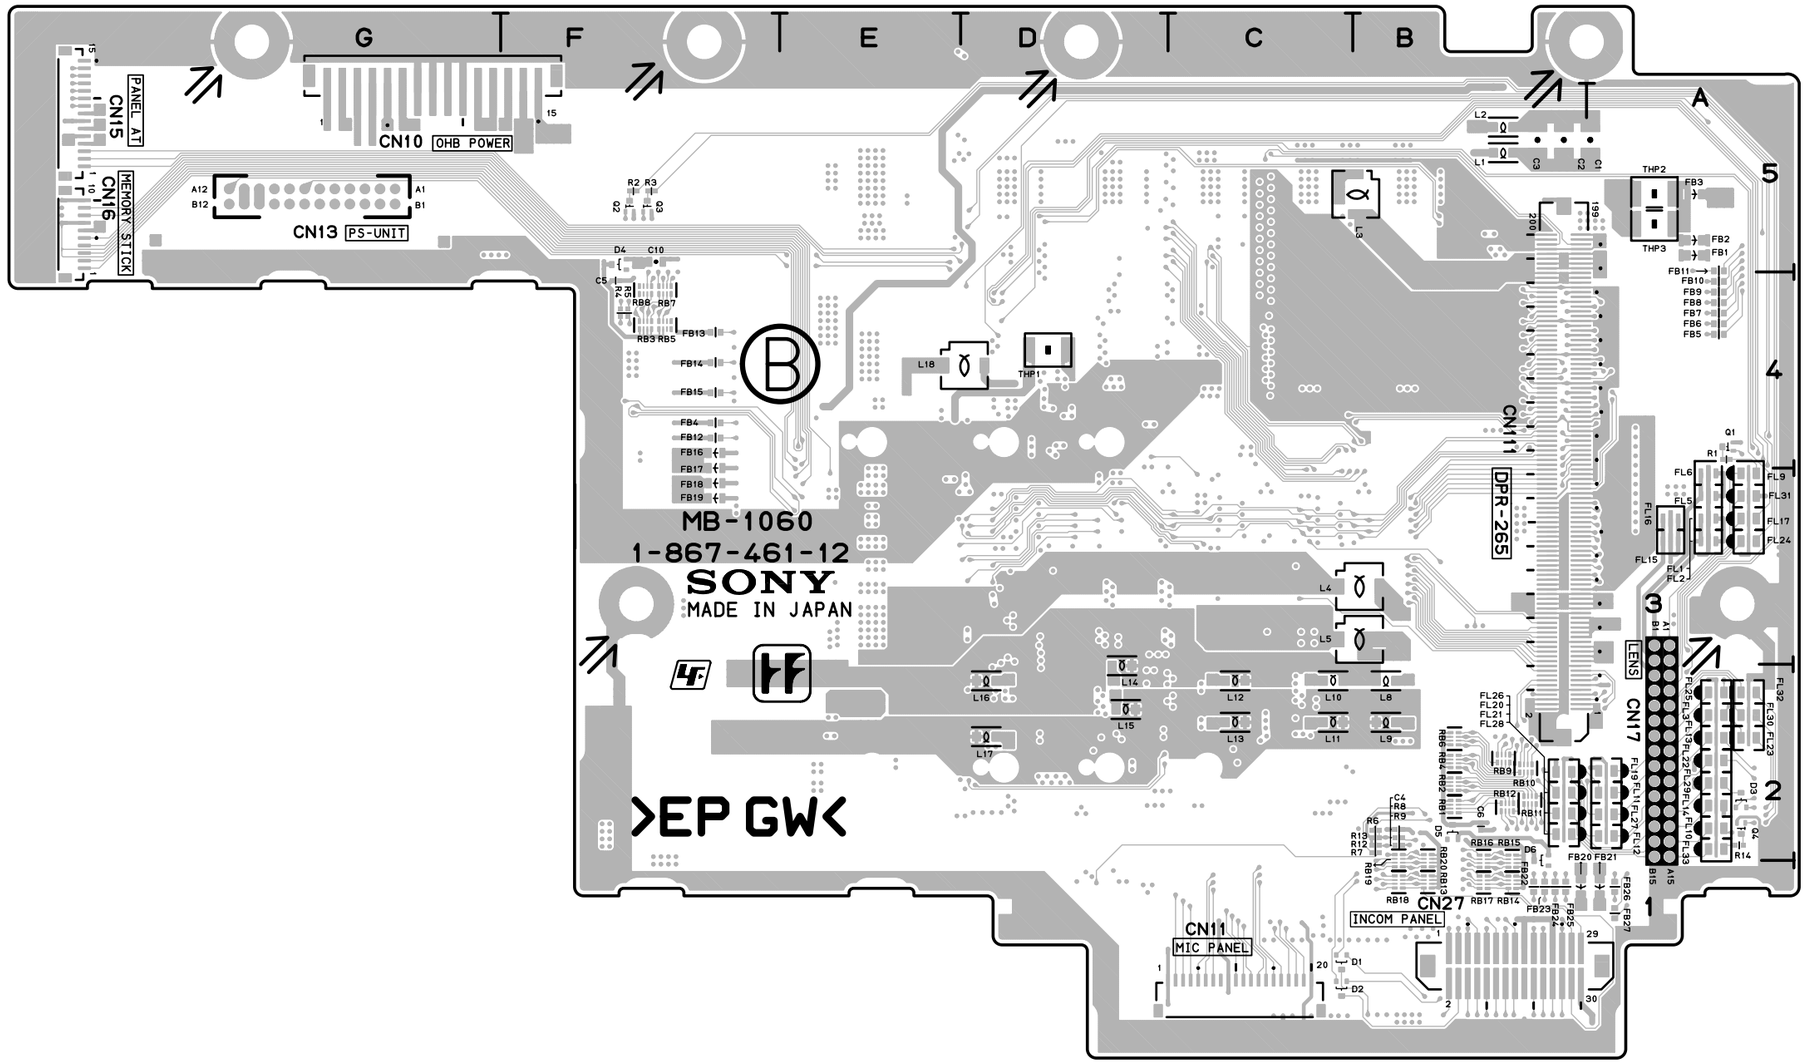


**MB-1060** -A SIDE-
SUFFIX: -21, 31




**MB-1060** -B SIDE-
SUFFIX: -21, 31

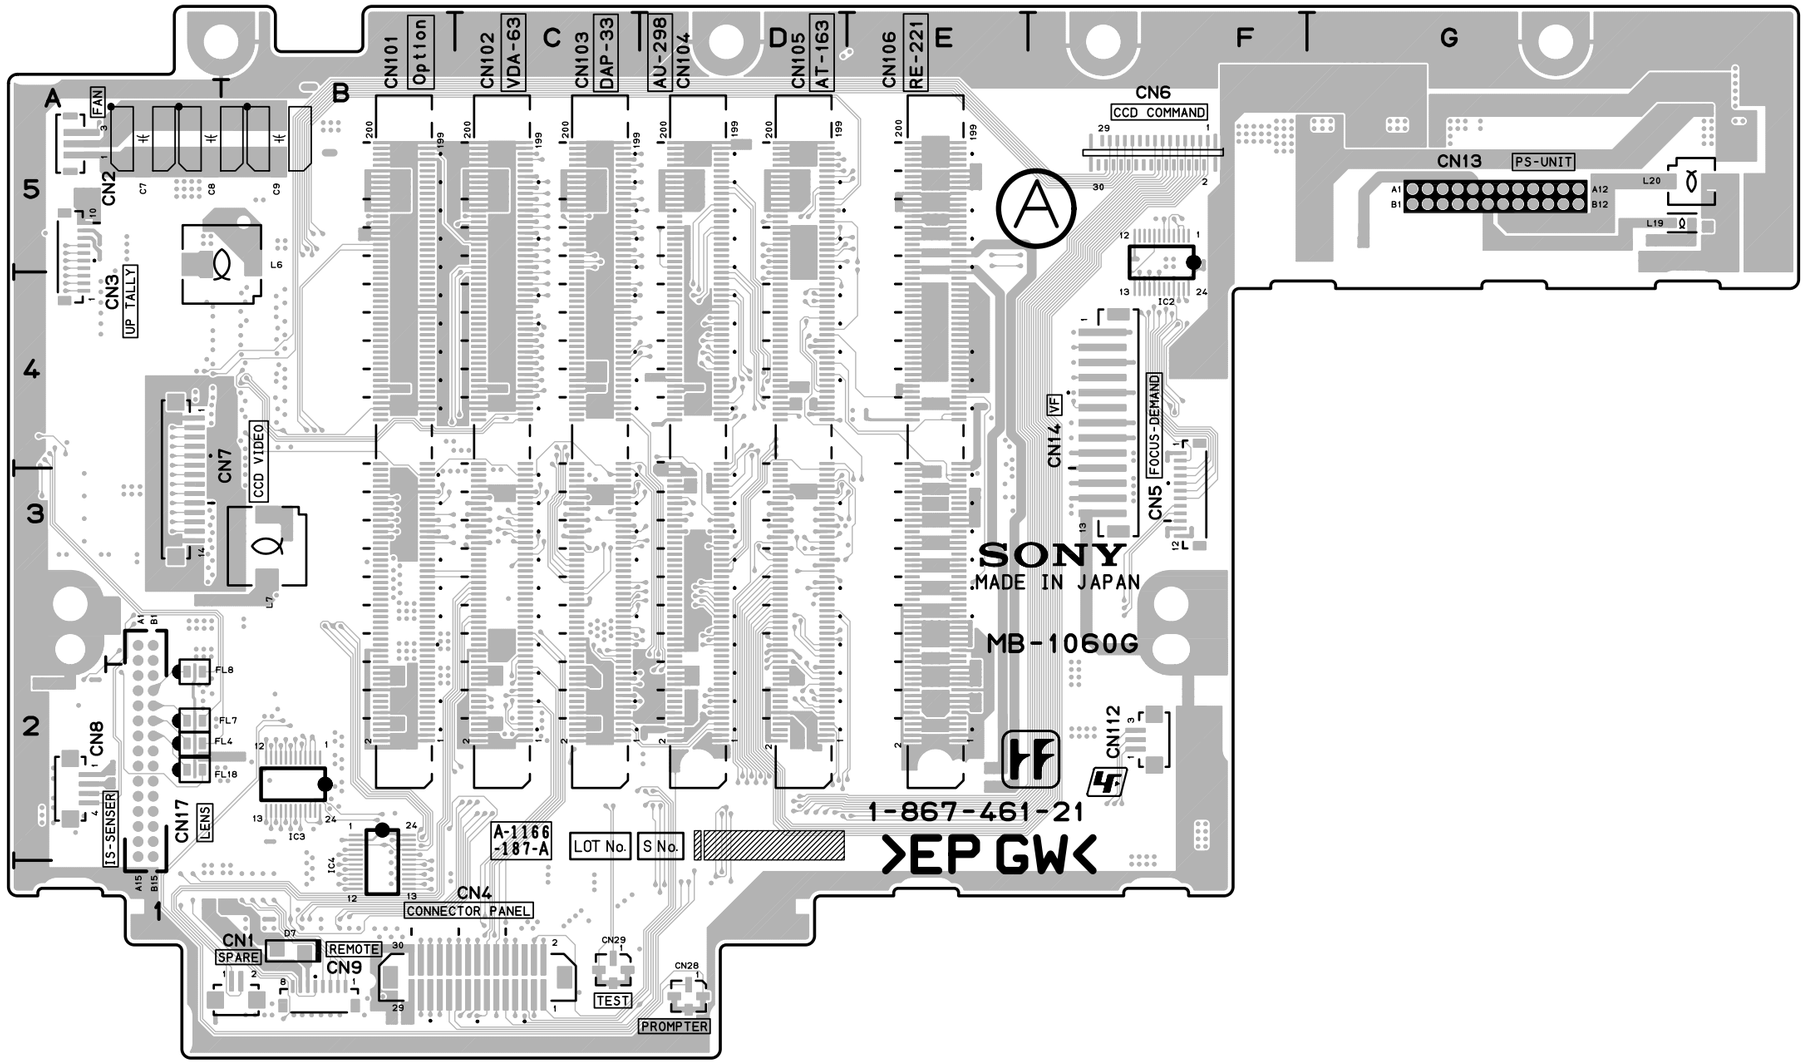


**MX-109** -A SIDE-
SUFFIX: -12, 31

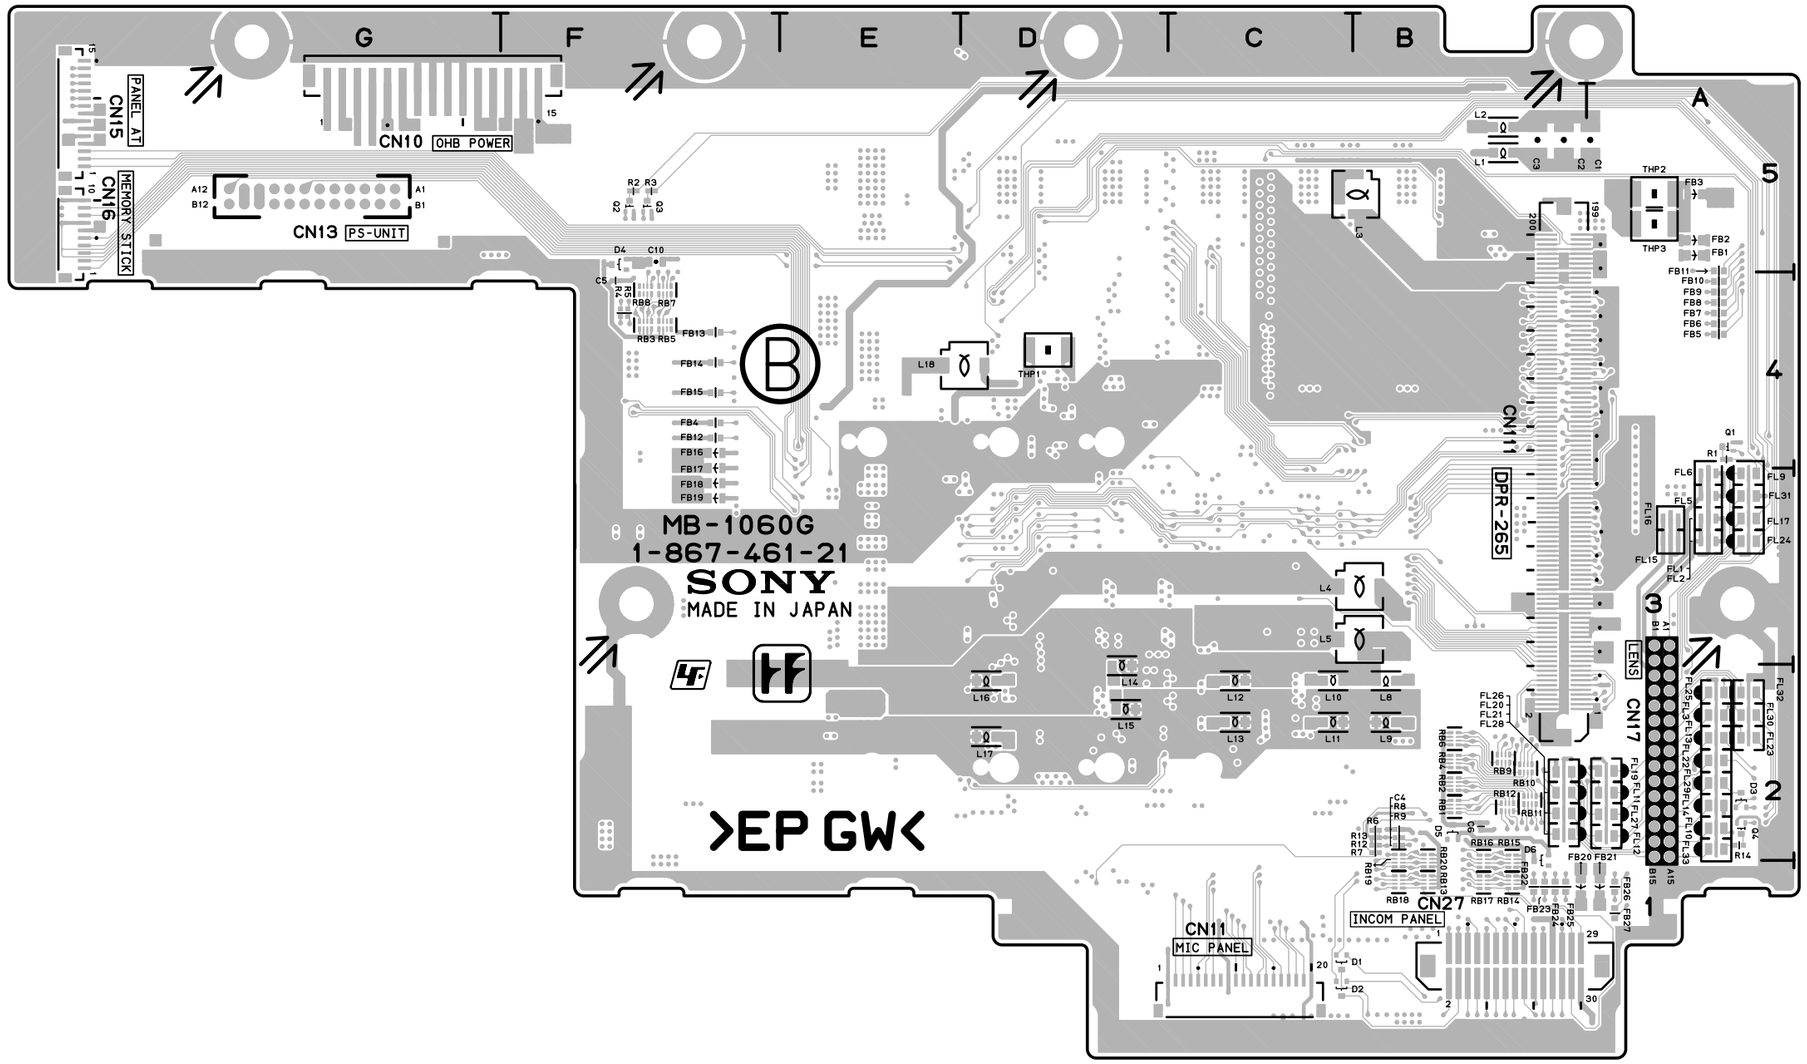


**MX-109** -B SIDE-
SUFFIX: -12, 31

MX-109 (1-868-409-12,31)
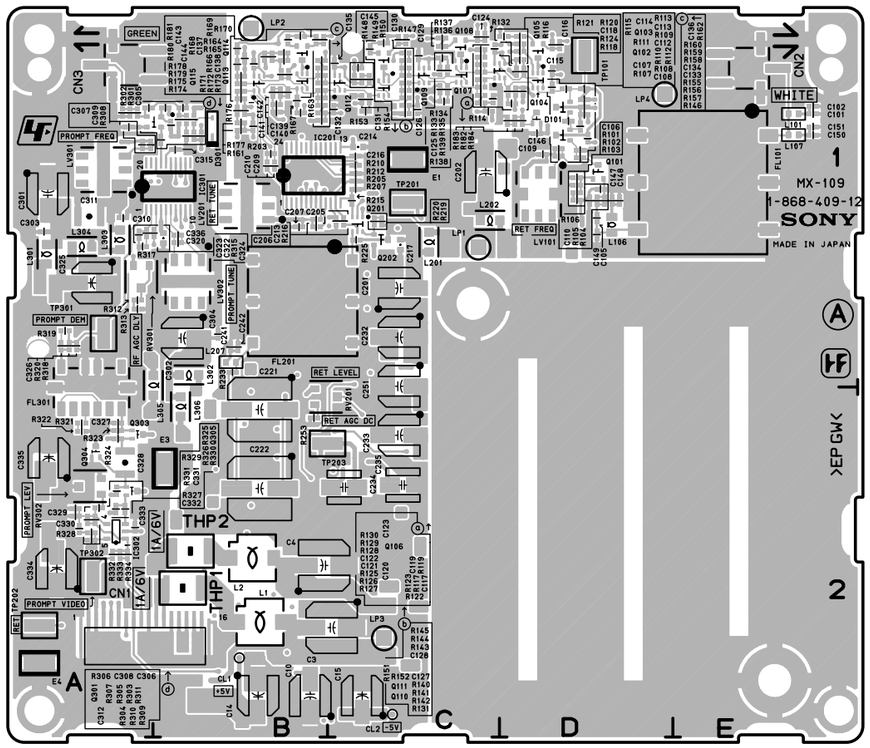
| | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| C1 | *C2 | C117 | D1 | C149 | D1 | C230 | *B2 | C308 | B1 | CN1 | A2 |
| C2 | *C2 | C118 | D1 | C150 | E1 | C231 | *B2 | C309 | A1 | CN2 | E1 |
| C3 | C2 | C119 | D1 | C151 | E1 | C232 | C1 | C310 | A1 | CN3 | A1 |
| C4 | B2 | C120 | C1 | C201 | C1 | C233 | C2 | C311 | A1 | | |
| C5 | *C2 | C121 | C1 | C202 | C1 | C234 | C2 | C312 | B1 | D1 | *C2 |
| C6 | *C2 | C122 | C1 | C203 | *C1 | C235 | C2 | C313 | *B1 | D2 | *C2 |
| C7 | *B2 | C123 | C1 | C204 | *B1 | C236 | *C2 | C314 | *A1 | D101 | D1 |
| C8 | *B2 | C124 | C1 | C205 | B1 | C237 | *C2 | C315 | B1 | D201 | *B1 |
| C9 | *B2 | C125 | C1 | C206 | B1 | C238 | *C1 | C316 | *B1 | D202 | *B1 |
| C10 | B2 | C126 | C1 | C207 | B1 | C239 | *C1 | C317 | *B1 | D301 | B1 |
| C11 | *B2 | C127 | C1 | C208 | *B1 | C240 | *B2 | C318 | *B1 | | |
| C12 | *C2 | C128 | C1 | C209 | B1 | C241 | B1 | C319 | *B1 | E1 | C1 |
| C13 | *C2 | C129 | C1 | C210 | B1 | C242 | B1 | C320 | B1 | E2 | *B1 |
| C14 | B2 | C130 | C1 | C211 | *B1 | C250 | *C2 | C321 | *B1 | E3 | B2 |
| C15 | C2 | C131 | C1 | C212 | *B1 | C251 | C1 | C322 | A1 | E4 | A2 |
| C16 | *B2 | C132 | C1 | C213 | C1 | C252 | *C2 | C323 | A1 | | |
| C101 | E1 | C133 | B1 | C214 | C1 | C253 | *C1 | C324 | B1 | FL101 | E1 |
| C102 | E1 | C134 | B1 | C215 | *B1 | C254 | *C1 | C325 | A1 | FL201 | B1 |
| C103 | *D1 | C135 | C1 | C216 | C1 | C255 | *C1 | C326 | A1 | FL301 | A2 |
| C104 | *D1 | C136 | B1 | C217 | C1 | C256 | *C2 | C327 | A2 | | |
| C105 | D1 | C137 | B1 | C218 | *C1 | C257 | *C2 | C328 | A2 | IC1 | *B2 |
| C106 | D1 | C138 | B1 | C219 | *C1 | C258 | *B2 | C329 | A2 | IC2 | *B2 |
| C107 | D1 | C139 | B1 | C220 | *C1 | C259 | *C2 | C330 | A2 | IC3 | *B2 |
| C108 | D1 | C140 | B1 | C221 | B2 | C260 | *C2 | C331 | A2 | IC201 | B1 |
| C109 | D1 | C141 | B1 | C222 | B2 | C261 | *C2 | C332 | A2 | IC202 | *B2 |
| C110 | D1 | C142 | B1 | C223 | *B1 | C301 | A1 | C333 | A2 | IC203 | *B2 |
| C111 | *D1 | C143 | B1 | C224 | *B2 | C302 | B1 | C334 | A2 | IC204 | *B2 |
| C112 | D1 | C144 | B1 | C225 | *B2 | C303 | A1 | C335 | A2 | IC205 | *C2 |
| C113 | D1 | C145 | C1 | C226 | *B2 | C304 | B1 | C336 | B1 | IC250 | *C2 |
| C114 | D1 | C146 | D1 | C227 | *B2 | C305 | A1 | | | IC251 | *C1 |
| C115 | D1 | C147 | D1 | C228 | *B2 | C306 | B1 | CL1 | B2 | IC252 | *C2 |
| C116 | D1 | C148 | D1 | C229 | *B2 | C307 | A1 | CL2 | C2 | IC301 | B1 |

| | | | | | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| IC302 | A2 | LV101 | D1 | Q304 | A2 | R115 | D1 | R147 | C1 | R179 | B1 | R227 | *C1 | R259 | *C2 | R307 | B1 | THP1 | B2 |
| | | LV201 | B1 | Q305 | A2 | R116 | D1 | R148 | C1 | R180 | B1 | R228 | *C1 | R260 | *C2 | R308 | A1 | THP2 | B2 |
| L1 | B2 | LV301 | A1 | | | R117 | D1 | R149 | C1 | R181 | B1 | R229 | *C1 | R261 | *C1 | R309 | B1 | | |
| L2 | B2 | LV302 | B1 | R1 | *C2 | R118 | D1 | R150 | C1 | R182 | D1 | R230 | *C1 | R262 | *C1 | R310 | B1 | TP101 | D1 |
| L101 | E1 | | | R2 | *C2 | R119 | D1 | R151 | C1 | R183 | D1 | R231 | *C1 | R263 | *C1 | R311 | B1 | TP201 | C1 |
| L102 | *D1 | Q1 | *C2 | R3 | *B2 | R120 | D1 | R152 | C1 | R184 | D1 | R232 | *C1 | R264 | *C2 | R312 | A1 | TP202 | A2 |
| L103 | *D1 | Q2 | *C2 | R4 | *B2 | R121 | D1 | R153 | C1 | R201 | *C1 | R233 | B1 | R265 | *C1 | R313 | A1 | TP203 | B2 |
| L104 | *D1 | Q101 | D1 | R5 | *B2 | R122 | D1 | R154 | C1 | R202 | *C1 | R234 | *B2 | R266 | *C1 | R314 | *B1 | TP301 | A1 |
| L105 | *D1 | Q102 | D1 | R6 | *B2 | R123 | D1 | R155 | B1 | R203 | B1 | R235 | *B2 | R267 | *C1 | R315 | B1 | TP302 | A2 |
| L106 | D1 | Q103 | D1 | R7 | *B2 | R124 | D1 | R156 | B1 | R204 | *B1 | R236 | *B1 | R268 | *C1 | R316 | *B1 | | |
| L107 | E1 | Q104 | D1 | R8 | *B2 | R125 | C1 | R157 | B1 | R205 | C1 | R237 | *B2 | R269 | *C1 | R317 | A1 | *:B SIDE | |
| L201 | C1 | Q105 | D1 | R9 | *B2 | R126 | C1 | R158 | B1 | R206 | *B1 | R238 | *B2 | R270 | *C1 | R318 | A1 | | |
| L202 | C1 | Q106 | D1 | R10 | *B2 | R127 | C1 | R159 | B1 | R207 | C1 | R239 | *B2 | R271 | *C1 | R319 | A1 | | |
| L203 | *C1 | Q107 | C1 | R11 | *B2 | R128 | C1 | R160 | B1 | R208 | *B1 | R240 | *B2 | R272 | *C1 | R320 | A1 | | |
| L204 | *B1 | Q108 | C1 | R12 | *B2 | R129 | C1 | R161 | B1 | R209 | *B1 | R241 | *B2 | R273 | *C1 | R321 | A2 | | |
| L205 | *B2 | Q109 | C1 | R13 | *B2 | R130 | C1 | R162 | B1 | R210 | C1 | R242 | *B2 | R274 | *C1 | R322 | A2 | | |
| L206 | *B2 | Q110 | C1 | R14 | *B2 | R131 | C1 | R163 | B1 | R211 | *B1 | R243 | *B2 | R275 | *C1 | R323 | A2 | | |
| L207 | B1 | Q111 | C1 | R15 | *B2 | R132 | C1 | R164 | B1 | R212 | C1 | R244 | *B2 | R276 | *C1 | R324 | A2 | | |
| L250 | *C2 | Q112 | C1 | R101 | D1 | R133 | C1 | R165 | B1 | R213 | *B1 | R245 | *B2 | R277 | *C2 | R325 | A2 | | |
| L251 | *B2 | Q113 | B1 | R102 | D1 | R134 | C1 | R166 | B1 | R214 | *C1 | R246 | *B2 | R278 | *C2 | R326 | A2 | | |
| L252 | *C2 | Q114 | B1 | R103 | D1 | R135 | C1 | R167 | B1 | R215 | C1 | R247 | *B2 | R279 | *C2 | R327 | A2 | | |
| L301 | A1 | Q115 | B1 | R104 | D1 | R136 | C1 | R168 | B1 | R216 | C1 | R248 | *B2 | R280 | *B2 | R328 | A2 | | |
| L302 | B1 | Q201 | C1 | R105 | D1 | R137 | C1 | R169 | B1 | R217 | *B1 | R249 | *B2 | R281 | *C2 | R329 | A2 | | |
| L303 | A1 | Q202 | C1 | R106 | D1 | R138 | C1 | R170 | B1 | R218 | *C1 | R250 | *B2 | R282 | *B2 | R330 | A2 | | |
| L304 | A1 | Q203 | *C1 | R107 | D1 | R139 | C1 | R171 | B1 | R219 | C1 | R251 | *C2 | R283 | *B2 | R331 | A2 | | |
| L305 | B1 | Q204 | *C2 | R108 | D1 | R140 | C1 | R172 | B1 | R220 | C1 | R252 | *C2 | R284 | *B2 | R332 | A2 | | |
| L306 | B2 | Q205 | *C2 | R109 | D1 | R141 | C1 | R173 | B1 | R221 | *C1 | R253 | B2 | R301 | A1 | R333 | A2 | | |
| | | Q250 | *C1 | R110 | D1 | R142 | C1 | R174 | B1 | R222 | *C1 | R254 | *B1 | R302 | A1 | R334 | A2 | | |
| LP1 | C1 | Q251 | *C1 | R111 | D1 | R143 | C1 | R175 | B1 | R223 | *C1 | R255 | *B1 | R303 | B1 | | | | |
| LP2 | B1 | Q301 | B1 | R112 | D1 | R144 | C1 | R176 | B1 | R224 | *C1 | R256 | *B1 | R304 | B1 | RV201 | B2 | | |
| LP3 | C2 | Q302 | *B1 | R113 | D1 | R145 | C1 | R177 | B1 | R225 | C1 | R257 | *C2 | R305 | B1 | RV301 | A1 | | |
| LP4 | D1 | Q303 | A2 | R114 | C1 | R146 | B1 | R178 | B1 | R226 | *C1 | R258 | *C2 | R306 | A1 | RV302 | A2 | | |

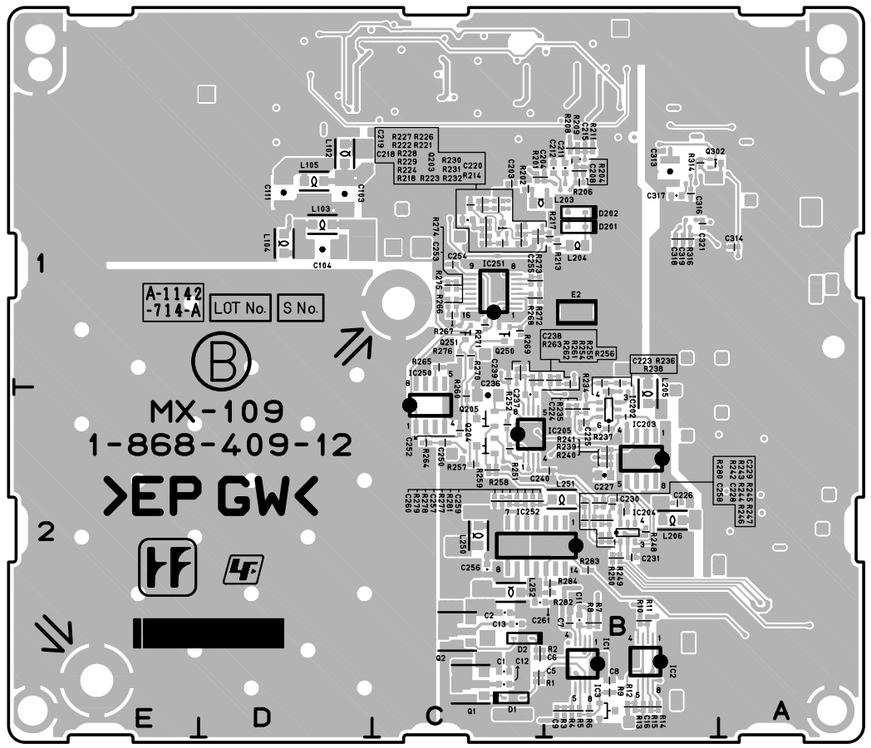PA-317 (1-865-971-14)

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| C1 | C2 | C189 | C2 | C283 | B2 | C377 | A2 |
| C2 | C2 | C190 | *C1 | C284 | B2 | C378 | A2 |
| C3 | C2 | C191 | *C1 | C285 | B2 | C379 | *A2 |
| C4 | B2 | C192 | *C1 | C286 | B2 | C380 | *A2 |
| C5 | B2 | C193 | *C1 | C287 | B2 | C381 | *A1 |
| C6 | A2 | C194 | C2 | C288 | B2 | C382 | A2 |
| C102 | *C1 | C195 | C2 | C289 | B2 | C383 | A2 |
| C103 | *C1 | C196 | *C2 | C290 | *B1 | C384 | A2 |
| C104 | *C1 | C197 | C2 | C291 | *B1 | C385 | A2 |
| C105 | *C1 | C198 | *C2 | C292 | *B1 | C386 | A2 |
| C106 | C1 | C199 | *C1 | C293 | *B2 | C387 | A2 |
| C107 | C1 | C200 | *C1 | C294 | B2 | C388 | A2 |
| C108 | *C1 | C202 | *B1 | C295 | B2 | C389 | A2 |
| C109 | *C1 | C203 | *B1 | C296 | C2 | C390 | *A1 |
| C110 | C1 | C204 | *B1 | C297 | B2 | C391 | *A1 |
| C111 | C1 | C205 | *B1 | C298 | *B2 | C392 | *A1 |
| C112 | C1 | C206 | *B1 | C299 | *B2 | C393 | *A2 |
| C113 | C1 | C207 | *B1 | C300 | *B2 | C394 | A2 |
| C114 | *C1 | C208 | *B1 | C302 | *A1 | C395 | A2 |
| C115 | *C1 | C209 | *B1 | C303 | *A1 | C396 | B2 |
| C116 | *C1 | C210 | B1 | C304 | *A1 | C397 | A2 |
| C117 | *C1 | C211 | B1 | C305 | *A1 | C398 | *A2 |
| C118 | *C1 | C212 | B1 | C306 | *A1 | C399 | *A2 |
| C119 | C1 | C213 | B1 | C307 | *A1 | C400 | *A2 |
| C120 | *C1 | C214 | B1 | C308 | A1 | C401 | *A2 |
| C121 | C1 | C215 | *B1 | C309 | *A1 | C402 | *A2 |
| C122 | C1 | C216 | B1 | C310 | A1 | C403 | A2 |
| C123 | *C1 | C217 | B1 | C311 | A1 | C404 | A2 |
| C124 | C1 | C218 | *B1 | C312 | A1 | C405 | A2 |
| C125 | C1 | C219 | B1 | C313 | A1 | C406 | A2 |
| C126 | C1 | C220 | *B1 | C314 | B1 | C407 | A2 |
| C127 | *C1 | C221 | B1 | C315 | *A1 | C408 | A2 |
| C128 | *C1 | C222 | B1 | C316 | A1 | C409 | A2 |
| C129 | *C1 | C223 | *B1 | C317 | B1 | C410 | A2 |
| C130 | *C1 | C224 | B1 | C318 | *A1 | C411 | A2 |
| C131 | *C1 | C225 | B1 | C319 | A1 | C412 | A2 |
| C132 | C1 | C226 | *B1 | C320 | *A1 | C413 | A2 |
| C133 | C1 | C227 | *B1 | C321 | A1 | C414 | A2 |
| C135 | *C1 | C228 | *B1 | C322 | A1 | C415 | A2 |
| C136 | *C1 | C229 | *B1 | C323 | *A1 | C416 | A2 |
| C137 | *C1 | C230 | *B1 | C324 | A1 | C417 | A2 |
| C138 | *C1 | C231 | *B1 | C325 | A1 | C418 | A2 |
| C139 | C1 | C232 | B1 | C326 | *A1 | C419 | A2 |
| C140 | *C1 | C233 | B1 | C327 | *A1 | C420 | B2 |
| C141 | *C1 | C235 | *B1 | C328 | *A1 | C421 | *A2 |
| C142 | *C1 | C236 | *B1 | C329 | *A1 | C422 | *A2 |
| C143 | *C1 | C237 | *B1 | C330 | *A1 | C423 | *C2 |
| C144 | *C1 | C238 | *B1 | C331 | *A1 | C424 | *A2 |
| C145 | C1 | C239 | B1 | C332 | B1 | C425 | *A2 |
| C146 | C1 | C240 | *B1 | C333 | A1 | C426 | *C2 |
| C147 | *C1 | C241 | *B1 | C335 | *A1 | C427 | *C2 |
| C148 | *C1 | C242 | *B1 | C336 | *A1 | C428 | *B2 |
| C149 | C1 | C243 | *B1 | C337 | *A1 | C429 | C2 |
| C150 | C1 | C244 | *B1 | C338 | *A1 | C430 | *B2 |
| C151 | C1 | C245 | B1 | C339 | A1 | C431 | *B2 |
| C152 | C1 | C246 | B1 | C340 | *A1 | C432 | *B2 |
| C153 | C1 | C247 | *B1 | C341 | *A1 | C433 | *B2 |
| C154 | *C1 | C248 | *B1 | C342 | *A1 | C434 | B2 |
| C155 | *C1 | C249 | B1 | C343 | *A1 | C435 | *C2 |
| C156 | C1 | C250 | B1 | C344 | *A1 | C436 | *B2 |
| C157 | C1 | C251 | B1 | C345 | B1 | C437 | *C2 |
| C158 | C1 | C252 | B1 | C346 | A1 | C438 | *B2 |
| C159 | C1 | C253 | B1 | C347 | *A1 | C439 | B2 |
| C160 | C1 | C254 | *B1 | C348 | *A1 | C440 | *C2 |
| C161 | C1 | C255 | *B1 | C349 | A1 | C441 | C2 |
| C162 | *C1 | C256 | B1 | C350 | A1 | C442 | *C2 |
| C163 | C1 | C257 | B1 | C351 | A1 | C443 | C2 |
| C164 | *C1 | C258 | B1 | C352 | A1 | C444 | *C2 |
| C165 | C1 | C259 | B1 | C353 | A1 | C445 | *C2 |
| C166 | C1 | C260 | B1 | C354 | *A1 | C446 | *C2 |
| C167 | C1 | C261 | B2 | C355 | *A1 | C447 | *C2 |
| C168 | C1 | C262 | *B2 | C356 | A1 | C448 | *A2 |
| C169 | *C1 | C263 | B1 | C357 | A1 | C449 | *A2 |
| C170 | C1 | C264 | *B2 | C358 | A1 | C450 | A2 |
| C171 | *C1 | C265 | B1 | C359 | A1 | C452 | A2 |
| C172 | C1 | C266 | B1 | C360 | A1 | C453 | A2 |
| C173 | *C1 | C267 | B1 | C361 | A2 | C454 | A2 |
| C174 | *C1 | C268 | B1 | C362 | *A2 | C455 | A2 |
| C175 | *C1 | C269 | *B1 | C363 | A1 | C456 | A2 |
| C176 | *C1 | C270 | B1 | C364 | *A2 | C457 | A2 |
| C177 | C1 | C271 | *B1 | C365 | A1 | C458 | A2 |
| C178 | C1 | C272 | B1 | C366 | A1 | C459 | A2 |
| C179 | *C1 | C273 | *B1 | C367 | A1 | C460 | A2 |
| C180 | *C1 | C274 | *B1 | C368 | A1 | C461 | A2 |
| C181 | *C1 | C275 | *B1 | C369 | *A1 | C462 | A2 |
| C182 | C2 | C276 | *B1 | C370 | A1 | C463 | A2 |
| C183 | C2 | C277 | B2 | C371 | *A1 | C464 | A2 |
| C184 | C2 | C278 | B2 | C372 | A1 | C465 | A2 |
| C185 | C2 | C279 | *B2 | C373 | *A1 | C466 | A2 |
| C186 | C2 | C280 | *B2 | C374 | *A1 | C467 | A2 |
| C187 | C2 | C281 | *B1 | C375 | *A1 | C468 | B2 |
| C188 | C2 | C282 | B2 | C376 | *A1 | C469 | B2 |



**PA-317** -A SIDE-
SUFFIX: -14



**PA-317** -B SIDE-
SUFFIX: -14

| | | | | | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| C470 | *B2 | IC104 | C1 | IC403 | A2 | L202 | *B1 | R119 | *C1 | R151 | C1 | R183 | C2 | R226 | B1 | R258 | *B2 | R290 | *B1 |
| C471 | *A2 | IC106 | C2 | IC404 | A2 | L301 | *A1 | R120 | C1 | R152 | C1 | R184 | C2 | R227 | B1 | R259 | *B2 | R302 | *A1 |
| C472 | A2 | IC107 | C2 | IC405 | A2 | L302 | *A1 | R121 | C1 | R153 | *C1 | R185 | *C1 | R228 | B1 | R260 | *B2 | R303 | *A1 |
| | | IC108 | *C1 | IC406 | A2 | L401 | *A2 | R122 | C1 | R154 | *C1 | R186 | *C1 | R229 | B1 | R261 | *B2 | R304 | *A1 |
| CL101 | C1 | IC109 | *C1 | IC407 | A2 | L402 | C2 | R123 | C1 | R155 | *C1 | R187 | C1 | R230 | B1 | R262 | *B2 | R305 | *A1 |
| CL102 | C1 | IC110 | *C1 | IC408 | A2 | L403 | *B2 | R124 | C1 | R156 | C2 | R188 | C1 | R231 | B1 | R263 | *B2 | R306 | *A1 |
| CL201 | B1 | IC111 | C2 | IC409 | A2 | L404 | C2 | R125 | C1 | R157 | *C1 | R189 | *C1 | R232 | B1 | R264 | *B1 | R307 | *A1 |
| CL202 | B1 | IC112 | C2 | IC410 | A2 | | | R126 | C1 | R158 | *C2 | R190 | *C1 | R233 | B1 | R265 | *B1 | R308 | *A1 |
| CL301 | A1 | IC201 | *B1 | IC411 | A2 | Q401 | *B2 | R127 | C1 | R159 | *C2 | R202 | *B1 | R234 | B1 | R266 | *B1 | R309 | *A1 |
| CL302 | A1 | IC202 | *B1 | IC412 | A2 | Q402 | *B2 | R128 | C1 | R160 | *C2 | R203 | *B1 | R235 | B1 | R267 | B2 | R310 | *A1 |
| | | IC203 | B1 | IC413 | A2 | Q403 | *B2 | R129 | C1 | R161 | *C1 | R204 | *B1 | R236 | B1 | R268 | B2 | R311 | *A1 |
| CN101 | *C1 | IC204 | B1 | IC414 | A2 | Q404 | *B2 | R130 | C1 | R162 | *C2 | R205 | *B1 | R237 | B1 | R269 | B2 | R312 | *A1 |
| CN201 | *B1 | IC206 | B2 | IC415 | A2 | Q405 | C2 | R131 | C1 | R163 | *C2 | R206 | *B1 | R238 | B1 | R270 | C2 | R313 | *A1 |
| CN301 | *A1 | IC207 | B2 | IC416 | A2 | Q406 | C2 | R132 | C1 | R164 | *C1 | R207 | *B1 | R239 | B1 | R271 | B2 | R314 | *A1 |
| CN401 | *A2 | IC208 | *B1 | IC417 | A2 | | | R133 | C1 | R165 | *C1 | R208 | *B1 | R240 | *B1 | R272 | *B2 | R315 | B1 |
| CN402 | C2 | IC209 | *B1 | IC418 | B2 | R102 | *C1 | R134 | C1 | R166 | *C1 | R209 | *B1 | R241 | B1 | R273 | B2 | R316 | B1 |
| | | IC210 | *B1 | IC419 | *C2 | R103 | *C1 | R135 | C1 | R167 | C2 | R210 | *B1 | R242 | B1 | R274 | B2 | R317 | B1 |
| E401 | C2 | IC211 | B2 | IC420 | C2 | R104 | *C1 | R136 | C1 | R168 | C2 | R211 | *B1 | R243 | B1 | R275 | *B2 | R318 | A1 |
| | | IC212 | B2 | IC421 | *C2 | R105 | *C1 | R137 | C1 | R169 | C2 | R212 | *B1 | R244 | B1 | R276 | B2 | R319 | A1 |
| FL101 | *C2 | IC301 | *A1 | IC422 | B2 | R106 | *C1 | R138 | C1 | R170 | C2 | R213 | *B1 | R245 | B2 | R277 | *B2 | R320 | A1 |
| FL102 | *C2 | IC302 | *A1 | IC423 | B2 | R107 | *C1 | R139 | C1 | R171 | C2 | R214 | *B1 | R246 | B2 | R278 | C2 | R321 | A1 |
| FL103 | *C2 | IC303 | A1 | IC424 | *A2 | R108 | *C1 | R140 | *C1 | R172 | *C2 | R215 | B1 | R247 | *B2 | R279 | B2 | R322 | A1 |
| FL201 | *B2 | IC304 | A1 | IC425 | *A2 | R109 | *C1 | R141 | C1 | R173 | C2 | R216 | B1 | R248 | *B2 | R280 | *B2 | R323 | A1 |
| FL202 | *B2 | IC306 | A2 | IC426 | *B2 | R110 | *C1 | R142 | C1 | R174 | C2 | R217 | B1 | R249 | *B1 | R281 | B2 | R324 | A1 |
| FL203 | *B2 | IC307 | A2 | IC427 | *C2 | R111 | *C1 | R143 | C1 | R175 | *C2 | R218 | B1 | R250 | *B1 | R282 | B2 | R325 | A1 |
| FL301 | *A2 | IC308 | *A1 | IC428 | *B2 | R112 | *C1 | R144 | C1 | R176 | C2 | R219 | B1 | R251 | B2 | R283 | B2 | R326 | A1 |
| FL302 | *A2 | IC309 | *A1 | IC429 | *A2 | R113 | *C1 | R145 | C1 | R177 | *C2 | R220 | B1 | R252 | B2 | R284 | B2 | R327 | A1 |
| FL303 | *A2 | IC310 | *A1 | IC430 | A2 | R114 | *C1 | R146 | C1 | R178 | C2 | R221 | B1 | R253 | *B1 | R285 | *B1 | R328 | A1 |
| | | IC311 | A2 | | | R115 | *C1 | R147 | *C1 | R179 | C2 | R222 | B1 | R254 | *B1 | R286 | *B1 | R329 | A1 |
| IC101 | *C1 | IC312 | A2 | L101 | *C1 | R116 | *C1 | R148 | *C1 | R180 | *C2 | R223 | B1 | R255 | *B1 | R287 | B1 | R330 | A1 |
| IC102 | *C1 | IC401 | A2 | L102 | *C1 | R117 | *C1 | R149 | *C1 | R181 | C2 | R224 | B1 | R256 | C2 | R288 | B1 | R331 | B1 |
| IC103 | C1 | IC402 | A2 | L201 | *B1 | R118 | *C1 | R150 | *C1 | R182 | C2 | R225 | B1 | R257 | *B2 | R289 | *B1 | R332 | A1 |

| | | | | | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| R333 | A1 | R435 | *A2 | | | | | | | | | | | | | | | | |
| R334 | A1 | R436 | *A2 | | | | | | | | | | | | | | | | |
| R335 | A1 | R437 | *C2 | | | | | | | | | | | | | | | | |
| R336 | A1 | R438 | C2 | | | | | | | | | | | | | | | | |
| R337 | A1 | R439 | C2 | | | | | | | | | | | | | | | | |
| R338 | A1 | R440 | C2 | | | | | | | | | | | | | | | | |
| R339 | A1 | R441 | C2 | | | | | | | | | | | | | | | | |
| R340 | *A1 | R442 | C2 | | | | | | | | | | | | | | | | |
| R341 | A1 | R443 | C2 | | | | | | | | | | | | | | | | |
| R342 | A1 | R444 | C2 | | | | | | | | | | | | | | | | |
| R343 | A1 | R445 | C2 | | | | | | | | | | | | | | | | |
| R344 | A1 | R446 | C2 | | | | | | | | | | | | | | | | |
| R345 | A2 | R447 | C2 | | | | | | | | | | | | | | | | |
| R346 | A2 | R448 | *C2 | | | | | | | | | | | | | | | | |
| R347 | *A2 | R449 | *C2 | | | | | | | | | | | | | | | | |
| R348 | *A2 | R450 | *B2 | | | | | | | | | | | | | | | | |
| R349 | *A1 | R451 | *B2 | | | | | | | | | | | | | | | | |
| R350 | *A1 | R452 | *B2 | | | | | | | | | | | | | | | | |
| R351 | A2 | R453 | *B2 | | | | | | | | | | | | | | | | |
| R352 | A2 | R454 | *B2 | | | | | | | | | | | | | | | | |
| R353 | *A1 | R455 | *B2 | | | | | | | | | | | | | | | | |
| R354 | *A1 | R456 | B2 | | | | | | | | | | | | | | | | |
| R355 | *A1 | R457 | B2 | | | | | | | | | | | | | | | | |
| R356 | B2 | R458 | B2 | | | | | | | | | | | | | | | | |
| R357 | *A2 | R459 | B2 | | | | | | | | | | | | | | | | |
| R358 | *A2 | R460 | B2 | | | | | | | | | | | | | | | | |
| R359 | *A2 | R461 | B2 | | | | | | | | | | | | | | | | |
| R360 | *A2 | R462 | B2 | | | | | | | | | | | | | | | | |
| R361 | *A2 | R463 | B2 | | | | | | | | | | | | | | | | |
| R362 | *A2 | R464 | B2 | | | | | | | | | | | | | | | | |
| R363 | *A2 | R465 | B2 | | | | | | | | | | | | | | | | |
| R364 | *A1 | R466 | B2 | | | | | | | | | | | | | | | | |
| R365 | *A1 | R467 | B2 | | | | | | | | | | | | | | | | |
| R366 | *A1 | R468 | B2 | | | | | | | | | | | | | | | | |
| R367 | A2 | R469 | *B2 | | | | | | | | | | | | | | | | |
| R368 | A2 | R470 | *B2 | | | | | | | | | | | | | | | | |
| R369 | A2 | R471 | *B2 | | | | | | | | | | | | | | | | |
| R370 | B2 | R472 | *B2 | | | | | | | | | | | | | | | | |
| R371 | A2 | R473 | *B2 | | | | | | | | | | | | | | | | |
| R372 | *A2 | R474 | *B2 | | | | | | | | | | | | | | | | |
| R373 | B2 | R475 | B2 | | | | | | | | | | | | | | | | |
| R374 | A2 | R476 | *C2 | | | | | | | | | | | | | | | | |
| R375 | *A2 | R477 | B2 | | | | | | | | | | | | | | | | |
| R376 | A2 | R478 | B2 | | | | | | | | | | | | | | | | |
| R377 | *A2 | R479 | B2 | | | | | | | | | | | | | | | | |
| R378 | B2 | R480 | B2 | | | | | | | | | | | | | | | | |
| R379 | A2 | R481 | B2 | | | | | | | | | | | | | | | | |
| R380 | *A2 | R482 | B2 | | | | | | | | | | | | | | | | |
| R381 | A2 | R483 | B2 | | | | | | | | | | | | | | | | |
| R382 | A2 | R484 | B2 | | | | | | | | | | | | | | | | |
| R383 | A2 | R485 | B2 | | | | | | | | | | | | | | | | |
| R384 | A2 | R486 | B2 | | | | | | | | | | | | | | | | |
| R385 | *A1 | R487 | B2 | | | | | | | | | | | | | | | | |
| R386 | *A1 | R488 | B2 | | | | | | | | | | | | | | | | |
| R387 | A1 | R489 | C2 | | | | | | | | | | | | | | | | |
| R388 | A1 | R490 | C2 | | | | | | | | | | | | | | | | |
| R389 | *A1 | R491 | C2 | | | | | | | | | | | | | | | | |
| R390 | *A1 | R492 | C2 | | | | | | | | | | | | | | | | |
| R401 | A2 | R493 | C2 | | | | | | | | | | | | | | | | |
| R402 | A2 | R494 | C2 | | | | | | | | | | | | | | | | |
| R403 | A2 | R495 | *C2 | | | | | | | | | | | | | | | | |
| R404 | A2 | R496 | *C2 | | | | | | | | | | | | | | | | |
| R405 | A2 | R497 | *C2 | | | | | | | | | | | | | | | | |
| R406 | A2 | R498 | *C2 | | | | | | | | | | | | | | | | |
| R407 | A2 | R499 | *C2 | | | | | | | | | | | | | | | | |
| R408 | A2 | R500 | *C2 | | | | | | | | | | | | | | | | |
| R409 | A2 | R501 | *C2 | | | | | | | | | | | | | | | | |
| R410 | A2 | R502 | *C2 | | | | | | | | | | | | | | | | |
| R411 | A2 | R503 | *C2 | | | | | | | | | | | | | | | | |
| R412 | A2 | R504 | *C2 | | | | | | | | | | | | | | | | |
| R413 | A2 | R505 | *C2 | | | | | | | | | | | | | | | | |
| R414 | A2 | R506 | *C2 | | | | | | | | | | | | | | | | |
| R415 | A2 | R507 | *C2 | | | | | | | | | | | | | | | | |
| R416 | A2 | R508 | *C2 | | | | | | | | | | | | | | | | |
| R417 | A2 | R509 | *B2 | | | | | | | | | | | | | | | | |
| R418 | B2 | R510 | *A2 | | | | | | | | | | | | | | | | |
| R419 | *A2 | R511 | A2 | | | | | | | | | | | | | | | | |
| R420 | *A2 | R512 | C2 | | | | | | | | | | | | | | | | |
| R421 | *C2 | | | | | | | | | | | | | | | | | | |
| R422 | *A2 | RV101 | C1 | | | | | | | | | | | | | | | | |
| R423 | *A2 | RV102 | C1 | | | | | | | | | | | | | | | | |
| R424 | *C2 | RV103 | C1 | | | | | | | | | | | | | | | | |
| R425 | *C2 | RV201 | B1 | | | | | | | | | | | | | | | | |
| R426 | *C2 | RV202 | B1 | | | | | | | | | | | | | | | | |
| R427 | *C2 | RV203 | B1 | | | | | | | | | | | | | | | | |
| R428 | *C2 | RV301 | A1 | | | | | | | | | | | | | | | | |
| R429 | *C2 | RV302 | A1 | | | | | | | | | | | | | | | | |
| R430 | *C2 | RV303 | A1 | | | | | | | | | | | | | | | | |
| R431 | *C2 | | | | | | | | | | | | | | | | | | |
| R432 | *C2 | *:B SIDE | | | | | | | | | | | | | | | | | |
| R433 | *C2 | | | | | | | | | | | | | | | | | | |
| R434 | *C2 | | | | | | | | | | | | | | | | | | |

PA-327 (1-865-959-11)
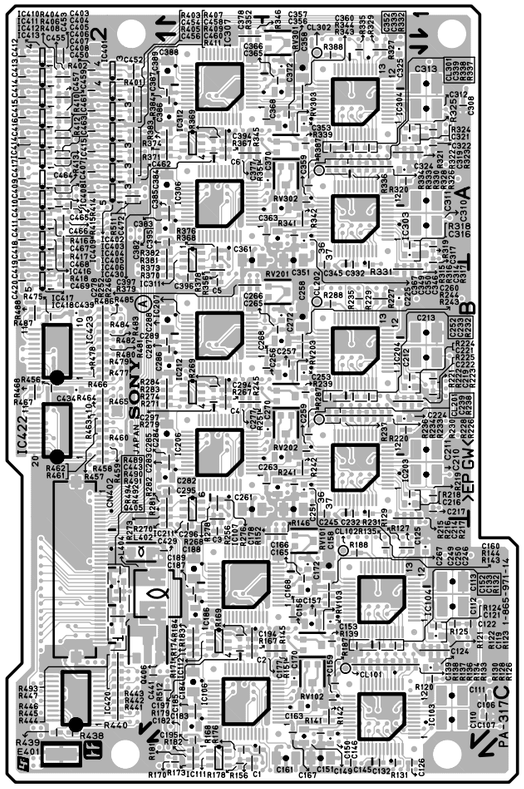
| | | | | | | | |
|---|---|---|---|---|---|---|---|
| C102 | *C1 | C241 | *B1 | C426 | *C2 | IC412 | A2 |
| C103 | *C1 | C242 | B2 | C427 | *C2 | IC413 | A2 |
| C104 | *C1 | C243 | B2 | C428 | *B2 | IC414 | A2 |
| C105 | *C1 | C244 | B2 | C429 | C2 | IC415 | A2 |
| C106 | *C1 | C245 | B2 | C430 | *B2 | IC416 | A2 |
| C107 | C1 | C246 | *B1 | C431 | *B2 | IC417 | A2 |
| C108 | C1 | C247 | *B2 | C432 | *B2 | IC418 | B2 |
| C109 | C1 | C248 | B2 | C433 | *B2 | IC419 | *C2 |
| C110 | C1 | C249 | B2 | C434 | B2 | IC420 | C2 |
| C111 | C1 | C250 | *B1 | C435 | *C2 | IC421 | *C2 |
| C112 | C1 | C251 | *B1 | C436 | *B2 | IC422 | B2 |
| C113 | *C1 | C252 | *B1 | C437 | *C2 | IC423 | B2 |
| C114 | C1 | C253 | *B1 | C438 | *B2 | IC424 | *A2 |
| C115 | *C1 | C254 | B2 | C439 | B2 | IC425 | *A2 |
| C116 | C1 | C302 | *A1 | C440 | *C2 | IC426 | *B2 |
| C117 | *C1 | C303 | *A1 | C441 | C2 | IC427 | *C2 |
| C118 | *C1 | C304 | *A1 | C442 | *C2 | | |
| C119 | *C1 | C305 | *A1 | C443 | C2 | L101 | *C1 |
| C120 | C1 | C306 | *A1 | C444 | *C2 | L201 | *B1 |
| C121 | *C1 | C307 | A1 | C445 | *C2 | L301 | *A1 |
| C122 | *C1 | C308 | A1 | C446 | *C2 | L401 | *A2 |
| C123 | C1 | C309 | A1 | C447 | *C2 | L402 | C2 |
| C124 | *C1 | C310 | A1 | C448 | A2 | L403 | *B2 |
| C125 | C1 | C311 | A1 | C449 | A2 | L404 | C2 |
| C126 | C1 | C312 | A1 | C450 | A2 | | |
| C127 | *C1 | C313 | *A1 | C451 | A2 | Q401 | *B2 |
| C128 | *C1 | C314 | A1 | C452 | A2 | Q402 | *B2 |
| C129 | C1 | C315 | *A1 | C453 | A2 | Q403 | *B2 |
| C130 | C1 | C316 | A1 | C454 | A2 | Q404 | *B2 |
| C131 | C1 | C317 | *A1 | C455 | A2 | Q405 | C2 |
| C132 | C1 | C318 | *A1 | C456 | A2 | Q406 | C2 |
| C133 | C1 | C319 | *A1 | C457 | A2 | | |
| C134 | *C1 | C320 | A1 | C458 | A2 | R102 | *C1 |
| C135 | C1 | C321 | *A1 | C459 | A2 | R103 | *C1 |
| C136 | *C1 | C322 | *A1 | C460 | A2 | R104 | *C1 |
| C137 | C1 | C323 | A1 | C461 | A2 | R105 | *C1 |
| C138 | *C1 | C324 | *A1 | C462 | A2 | R106 | *C1 |
| C139 | *C1 | C325 | A1 | C463 | A2 | R107 | *C1 |
| C140 | C1 | C326 | A1 | C464 | B2 | R108 | *C1 |
| C141 | *C1 | C327 | *A1 | C465 | B2 | R109 | *C1 |
| C142 | C2 | C328 | *A1 | | | R110 | *C1 |
| C143 | C2 | C329 | A1 | CL101 | C1 | R111 | *C1 |
| C144 | C2 | C330 | A1 | CL201 | B1 | R112 | C1 |
| C145 | C2 | C331 | A1 | CL301 | A1 | R113 | *C1 |
| C146 | *C1 | C332 | A2 | CL401 | A2 | R114 | *C1 |
| C147 | *C1 | C333 | A1 | CL402 | A2 | R115 | C1 |
| C148 | C2 | C334 | *A2 | CL403 | A2 | R116 | C1 |
| C149 | C2 | C335 | A1 | CL404 | A2 | R117 | C1 |
| C150 | *C1 | C336 | *A1 | CL405 | A2 | R118 | C1 |
| C151 | *C1 | C337 | A1 | CL406 | A2 | R119 | C1 |
| C152 | *C1 | C338 | *A1 | | | R120 | C1 |
| C153 | *C1 | C339 | *A1 | CN101 | *C1 | R121 | C1 |
| C154 | C2 | C340 | A2 | CN201 | *B1 | R122 | C1 |
| C202 | *B1 | C341 | *A1 | CN301 | *A1 | R123 | C1 |
| C203 | *B1 | C342 | A2 | CN401 | *A2 | R124 | C1 |
| C204 | *B1 | C343 | A2 | CN402 | C2 | R125 | C1 |
| C205 | *B1 | C344 | A2 | | | R126 | C1 |
| C206 | *B1 | C345 | A2 | E401 | C2 | R127 | C1 |
| C207 | B1 | C346 | *A1 | | | R128 | C1 |
| C208 | B1 | C347 | *A2 | FL101 | *C2 | R129 | C1 |
| C209 | B1 | C348 | A2 | FL201 | *B2 | R130 | C1 |
| C210 | B1 | C349 | A2 | FL301 | *A2 | R131 | C1 |
| C211 | B1 | C350 | *A1 | | | R132 | *C1 |
| C212 | B1 | C351 | *A1 | IC101 | *C1 | R133 | *C1 |
| C213 | *B1 | C352 | *A1 | IC102 | *C1 | R134 | C1 |
| C214 | B1 | C353 | *A1 | IC103 | C1 | R135 | *C1 |
| C215 | *B1 | C354 | A2 | IC104 | C2 | R136 | C1 |
| C216 | B1 | C401 | *A2 | IC105 | *C1 | R137 | *C1 |
| C217 | *B1 | C402 | *A2 | IC106 | C2 | R138 | *C1 |
| C218 | *B1 | C403 | A2 | IC201 | *B1 | R139 | *C1 |
| C219 | *B1 | C404 | A2 | IC202 | *B1 | R140 | *C2 |
| C220 | B1 | C405 | A2 | IC203 | B1 | R141 | C2 |
| C221 | *B1 | C406 | A2 | IC204 | B2 | R142 | C2 |
| C222 | *B1 | C407 | A2 | IC205 | *B1 | R143 | C2 |
| C223 | B1 | C408 | A2 | IC206 | B2 | R144 | C2 |
| C224 | *B1 | C409 | A2 | IC301 | *A1 | R145 | C2 |
| C225 | B1 | C410 | A2 | IC302 | *A1 | R146 | C2 |
| C226 | B1 | C411 | A2 | IC303 | A1 | R147 | C2 |
| C227 | *B1 | C412 | A2 | IC304 | A2 | R148 | C2 |
| C228 | *B1 | C413 | A2 | IC305 | *A1 | R149 | C2 |
| C229 | B1 | C414 | A2 | IC306 | A2 | R150 | *C1 |
| C230 | B1 | C415 | A2 | IC401 | A2 | R151 | *C1 |
| C231 | B1 | C416 | A2 | IC402 | A2 | R152 | *C1 |
| C232 | B2 | C417 | A2 | IC403 | A2 | R153 | *C1 |
| C233 | B1 | C418 | A2 | IC404 | A2 | R154 | C2 |
| C234 | *B2 | C419 | A2 | IC405 | A2 | R155 | *C1 |
| C235 | B1 | C420 | B2 | IC406 | A2 | R156 | *C1 |
| C236 | *B1 | C421 | *A2 | IC407 | A2 | R202 | *B1 |
| C237 | B1 | C422 | *A2 | IC408 | A2 | R203 | *B1 |
| C238 | *B1 | C423 | *C2 | IC409 | A2 | R204 | *B1 |
| C239 | *B1 | C424 | *A2 | IC410 | A2 | R205 | *B1 |
| C240 | B2 | C425 | *B2 | IC411 | A2 | R206 | *B1 |

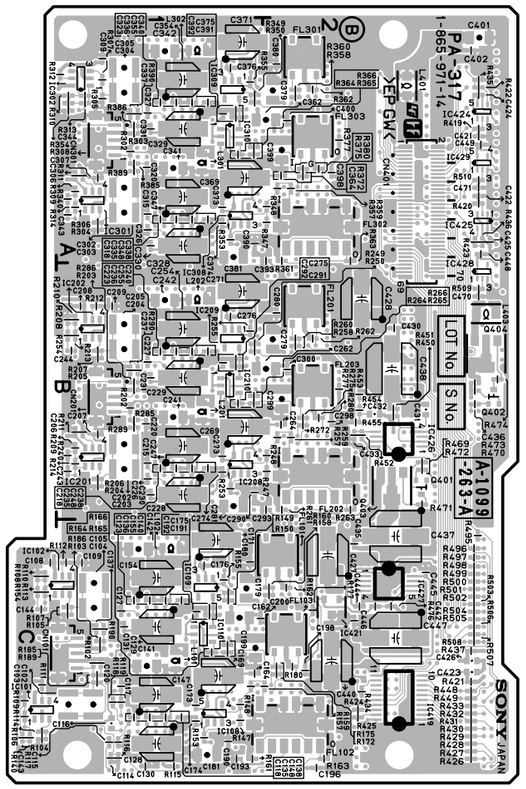


**PA-327** -A SIDE-
SUFFIX: -11




**PA-327** -B SIDE-
SUFFIX: -11

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| R207 | *B1 | R344 | A2 | R480 | *C2 | | |
| R208 | *B1 | R345 | A2 | R481 | *C2 | | |
| R209 | *B1 | R346 | A2 | R482 | *C2 | | |
| R210 | *B1 | R347 | A2 | R483 | *C2 | | |
| R211 | *B1 | R348 | A2 | R484 | *C2 | | |
| R212 | B1 | R349 | A2 | R485 | *C2 | | |
| R213 | *B1 | R350 | *A1 | R486 | *C2 | | |
| R214 | *B1 | R351 | *A1 | R487 | *C2 | | |
| R215 | B1 | R352 | *A1 | R488 | *C2 | | |
| R216 | B1 | R353 | *A1 | R489 | *C2 | | |
| R217 | B1 | R354 | A2 | R490 | *C2 | | |
| R218 | B1 | R355 | *A1 | R491 | *C2 | | |
| R219 | B1 | R356 | *A1 | R492 | *C2 | | |
| R220 | B1 | R401 | A2 | R493 | *C2 | | |
| R221 | B1 | R402 | A2 | R494 | *A1 | | |
| R222 | B1 | R403 | A2 | | | | |
| R223 | B1 | R404 | A2 | RV101 | C1 | | |
| R224 | B1 | R405 | A2 | RV201 | B1 | | |
| R225 | B1 | R406 | A2 | RV301 | A1 | | |
| R226 | B1 | R407 | A2 | | | | |
| R227 | B1 | R408 | A2 | *:B SIDE | | | |
| R228 | B1 | R409 | A2 | | | | |
| R229 | B1 | R410 | A2 | | | | |
| R230 | B1 | R411 | A2 | | | | |
| R231 | B1 | R412 | A2 | | | | |
| R232 | *B2 | R413 | A2 | | | | |
| R233 | *B2 | R414 | A2 | | | | |
| R234 | B1 | R415 | A2 | | | | |
| R235 | *B1 | R416 | A2 | | | | |
| R236 | B1 | R417 | A2 | | | | |
| R237 | *B2 | R418 | B2 | | | | |
| R238 | *B2 | R419 | *A2 | | | | |
| R239 | *B2 | R420 | *A2 | | | | |
| R240 | *B2 | R421 | *C2 | | | | |
| R241 | B2 | R422 | *A2 | | | | |
| R242 | B2 | R423 | *B2 | | | | |
| R243 | B2 | R424 | *C2 | | | | |
| R244 | B2 | R425 | *C2 | | | | |
| R245 | B2 | R426 | *C2 | | | | |
| R246 | B2 | R427 | *C2 | | | | |
| R247 | B2 | R428 | *C2 | | | | |
| R248 | B2 | R429 | *C2 | | | | |
| R249 | B2 | R430 | *A2 | | | | |
| R250 | *B1 | R431 | *B2 | | | | |
| R251 | *B1 | R432 | *C2 | | | | |
| R252 | *B1 | R433 | C2 | | | | |
| R253 | *B1 | R434 | C2 | | | | |
| R254 | B2 | R435 | C2 | | | | |
| R255 | *B1 | R436 | C2 | | | | |
| R256 | *B1 | R437 | C2 | | | | |
| R302 | *A1 | R438 | C2 | | | | |
| R303 | *A1 | R439 | *C2 | | | | |
| R304 | *A1 | R440 | *C2 | | | | |
| R305 | *A1 | R441 | *B2 | | | | |
| R306 | *A1 | R442 | *B2 | | | | |
| R307 | *A1 | R443 | *B2 | | | | |
| R308 | *A1 | R444 | *B2 | | | | |
| R309 | *A1 | R445 | *B2 | | | | |
| R310 | *A1 | R446 | *B2 | | | | |
| R311 | *A1 | R447 | B2 | | | | |
| R312 | A1 | R448 | B2 | | | | |
| R313 | *A1 | R449 | B2 | | | | |
| R314 | *A1 | R450 | B2 | | | | |
| R315 | A1 | R451 | B2 | | | | |
| R316 | A1 | R452 | B2 | | | | |
| R317 | A1 | R453 | B2 | | | | |
| R318 | A1 | R454 | B2 | | | | |
| R319 | A1 | R455 | B2 | | | | |
| R320 | A1 | R456 | *B2 | | | | |
| R321 | A1 | R457 | *B2 | | | | |
| R322 | A1 | R458 | *B2 | | | | |
| R323 | A1 | R459 | *B2 | | | | |
| R324 | A1 | R460 | *B2 | | | | |
| R325 | A1 | R461 | *B2 | | | | |
| R326 | A1 | R462 | B2 | | | | |
| R327 | A1 | R463 | *C2 | | | | |
| R328 | A1 | R464 | B2 | | | | |
| R329 | A1 | R465 | B2 | | | | |
| R330 | A1 | R466 | B2 | | | | |
| R331 | A1 | R467 | B2 | | | | |
| R332 | *A2 | R468 | B2 | | | | |
| R333 | *A2 | R469 | B2 | | | | |
| R334 | A1 | R470 | B2 | | | | |
| R335 | *A1 | R471 | B2 | | | | |
| R336 | A1 | R472 | C2 | | | | |
| R337 | *A2 | R473 | C2 | | | | |
| R338 | *A2 | R474 | C2 | | | | |
| R339 | *A2 | R475 | C2 | | | | |
| R340 | *A2 | R476 | C2 | | | | |
| R341 | A2 | R477 | C2 | | | | |
| R342 | A2 | R478 | *C2 | | | | |
| R343 | A2 | R479 | *C2 | | | | |

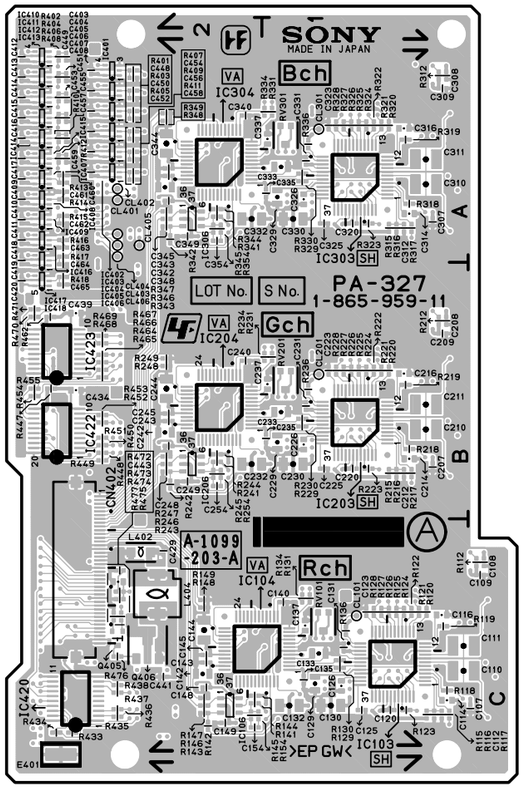PA-317 (1-865-971-21)

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| C1 | C2 | C188 | C2 | C281 | *B1 | C374 | *A1 |
| C2 | C2 | C189 | C2 | C282 | B2 | C375 | *A1 |
| C3 | C2 | C190 | *C1 | C283 | B2 | C376 | *A1 |
| C4 | B2 | C191 | *C1 | C284 | B2 | C377 | A2 |
| C5 | B2 | C192 | *C1 | C285 | B2 | C378 | A2 |
| C6 | A2 | C193 | *C1 | C286 | B2 | C379 | *A2 |
| C101 | *C2 | C194 | C2 | C287 | B2 | C380 | *A2 |
| C102 | *C2 | C195 | C2 | C288 | B2 | C381 | *A1 |
| C103 | *C2 | C196 | *C2 | C289 | B2 | C382 | A2 |
| C104 | C1 | C197 | C2 | C290 | *B1 | C383 | A2 |
| C105 | C1 | C198 | *C2 | C291 | *B1 | C384 | A2 |
| C106 | *C1 | C199 | *C1 | C292 | *B1 | C385 | A2 |
| C107 | *C1 | C200 | *C1 | C293 | *B2 | C386 | A2 |
| C108 | *C1 | C201 | *B2 | C294 | B2 | C387 | A2 |
| C109 | *C1 | C202 | *B2 | C295 | B2 | C388 | A2 |
| C110 | C1 | C203 | *B2 | C296 | C2 | C389 | A2 |
| C111 | C1 | C204 | B1 | C297 | B2 | C390 | *A1 |
| C112 | C1 | C205 | B1 | C298 | *B2 | C391 | *A1 |
| C113 | C1 | C206 | *B1 | C299 | *B2 | C392 | *A1 |
| C114 | *C1 | C207 | *B1 | C300 | *B2 | C393 | *A2 |
| C115 | *C1 | C208 | *B1 | C301 | *A2 | C394 | A2 |
| C116 | *C1 | C209 | *B1 | C302 | *A2 | C395 | A2 |
| C117 | *C1 | C210 | B1 | C303 | *A2 | C396 | B2 |
| C118 | *C1 | C211 | B1 | C304 | A1 | C397 | A2 |
| C119 | C1 | C212 | B1 | C305 | A1 | C398 | *A2 |
| C120 | *C1 | C213 | B1 | C306 | *A1 | C399 | *A2 |
| C121 | C1 | C214 | B1 | C307 | *A1 | C400 | *A2 |
| C122 | C1 | C215 | *B1 | C308 | *A1 | C401 | *A2 |
| C123 | *C1 | C216 | B1 | C309 | *A1 | C402 | *A2 |
| C124 | C1 | C217 | B1 | C310 | A1 | C403 | A2 |
| C125 | C1 | C218 | *B1 | C311 | A1 | C404 | A2 |
| C126 | C1 | C219 | B1 | C312 | A1 | C405 | A2 |
| C127 | *C1 | C220 | *B1 | C313 | A1 | C406 | A2 |
| C128 | *C1 | C221 | B1 | C314 | B1 | C407 | A2 |
| C129 | *C1 | C222 | B1 | C315 | *A1 | C408 | A2 |
| C130 | *C1 | C223 | *B1 | C316 | A1 | C409 | A2 |
| C131 | *C1 | C224 | B1 | C317 | B1 | C410 | A2 |
| C132 | C1 | C225 | B1 | C318 | *A1 | C411 | A2 |
| C133 | C1 | C226 | *B1 | C319 | A1 | C412 | A2 |
| C135 | *C1 | C227 | *B1 | C320 | *A1 | C413 | A2 |
| C136 | *C1 | C228 | *B1 | C321 | A1 | C414 | A2 |
| C137 | C1 | C229 | *B1 | C322 | A1 | C415 | A2 |
| C138 | *C1 | C230 | *B1 | C323 | *A1 | C416 | A2 |
| C139 | C1 | C231 | *B1 | C324 | A1 | C417 | A2 |
| C140 | *C1 | C232 | B1 | C325 | A1 | C418 | A2 |
| C141 | *C1 | C233 | B1 | C326 | *A1 | C419 | A2 |
| C142 | *C1 | C235 | *B1 | C327 | *A1 | C420 | B2 |
| C143 | *C1 | C236 | *B1 | C328 | *A1 | C421 | *A2 |
| C144 | *C1 | C237 | B1 | C329 | *A1 | C422 | *A2 |
| C145 | C1 | C238 | *B1 | C330 | *A1 | C423 | *C2 |
| C146 | C1 | C239 | B1 | C331 | *A1 | C424 | *A2 |
| C147 | *C1 | C240 | *B1 | C332 | B1 | C425 | *A2 |
| C148 | *C1 | C241 | *B1 | C333 | A1 | C426 | *C2 |
| C149 | C1 | C242 | *B1 | C335 | *A1 | C427 | *C2 |
| C150 | C1 | C243 | *B1 | C336 | *A1 | C428 | *B2 |
| C151 | C1 | C244 | *B1 | C337 | A1 | C429 | C2 |
| C152 | C1 | C245 | B1 | C338 | *A1 | C430 | *B2 |
| C153 | C1 | C246 | B1 | C339 | A1 | C431 | *B2 |
| C154 | *C1 | C247 | *B1 | C340 | *A1 | C432 | *B2 |
| C155 | *C1 | C248 | *B1 | C341 | *A1 | C433 | *B2 |
| C156 | C1 | C249 | B1 | C342 | *A1 | C434 | B2 |
| C157 | C1 | C250 | B1 | C343 | *A1 | C435 | *C2 |
| C158 | C1 | C251 | B1 | C344 | *A1 | C436 | *B2 |
| C159 | C1 | C252 | B1 | C345 | B1 | C437 | *C2 |
| C160 | C1 | C253 | B1 | C346 | A1 | C438 | *B2 |
| C161 | C1 | C254 | *B1 | C347 | *A1 | C439 | B2 |
| C162 | *C1 | C255 | *B1 | C348 | *A1 | C440 | *C2 |
| C163 | C1 | C256 | B1 | C349 | A1 | C441 | C2 |
| C164 | *C1 | C257 | B1 | C350 | A1 | C442 | *C2 |
| C165 | C1 | C258 | B1 | C351 | A1 | C443 | C2 |
| C166 | C1 | C259 | B1 | C352 | A1 | C444 | *C2 |
| C167 | C1 | C260 | B1 | C353 | A1 | C445 | *C2 |
| C168 | C1 | C261 | B2 | C354 | *A1 | C446 | *C2 |
| C169 | *C1 | C262 | *B2 | C355 | *A1 | C447 | *C2 |
| C170 | C1 | C263 | B1 | C356 | A1 | C448 | *A2 |
| C171 | *C1 | C264 | *B2 | C357 | A1 | C449 | *A2 |
| C172 | C1 | C265 | B1 | C358 | A1 | C450 | A2 |
| C173 | *C1 | C266 | B1 | C359 | A1 | C452 | A2 |
| C174 | *C1 | C267 | B1 | C360 | A1 | C453 | A2 |
| C175 | *C1 | C268 | B1 | C361 | A2 | C454 | A2 |
| C176 | *C1 | C269 | *B1 | C362 | *A2 | C455 | A2 |
| C177 | C1 | C270 | B1 | C363 | A1 | C456 | A2 |
| C178 | C1 | C271 | *B1 | C364 | *A2 | C457 | A2 |
| C179 | *C1 | C272 | B1 | C365 | A1 | C458 | A2 |
| C180 | *C1 | C273 | *B1 | C366 | A1 | C459 | A2 |
| C181 | *C1 | C274 | *B1 | C367 | A1 | C460 | A2 |
| C182 | C2 | C275 | *B1 | C368 | A1 | C461 | A2 |
| C183 | C2 | C276 | *B1 | C369 | *A1 | C462 | A2 |
| C184 | C2 | C277 | B2 | C370 | A1 | C463 | A2 |
| C185 | C2 | C278 | B2 | C371 | *A1 | C464 | A2 |
| C186 | C2 | C279 | *B2 | C372 | A1 | C465 | A2 |
| C187 | C2 | C280 | *B2 | C373 | *A1 | C466 | A2 |

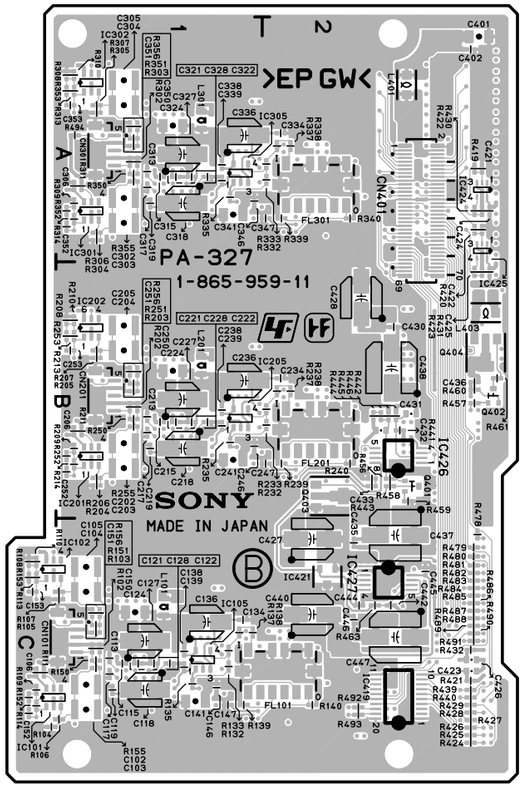

**PA-317** -A SIDE-
SUFFIX: -21



**PA-317** -B SIDE-
SUFFIX: -21

| | | | | | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| C467 | A2 | IC101 | *C1 | IC312 | A2 | L101 | *C1 | R116 | *C1 | R148 | *C1 | R180 | *C2 | R223 | B1 | R255 | *B1 | R287 | B1 |
| C468 | B2 | IC102 | *C1 | IC401 | A2 | L102 | *C1 | R117 | *C1 | R149 | *C1 | R181 | C2 | R224 | B1 | R256 | C2 | R288 | B1 |
| C469 | B2 | IC103 | C1 | IC402 | A2 | L201 | *B1 | R118 | *C1 | R150 | *C1 | R182 | C2 | R225 | B1 | R257 | *B2 | R289 | *B1 |
| C470 | *B2 | IC104 | C1 | IC403 | A2 | L202 | *B1 | R119 | *C1 | R151 | C1 | R183 | C2 | R226 | B1 | R258 | *B2 | R290 | *B1 |
| C471 | *A2 | IC106 | C2 | IC404 | A2 | L301 | *A1 | R120 | C1 | R152 | C1 | R184 | C2 | R227 | B1 | R259 | *B2 | R302 | A1 |
| C472 | A2 | IC107 | C2 | IC405 | A2 | L302 | *A1 | R121 | C1 | R153 | *C1 | R185 | C1 | R228 | B1 | R260 | *B2 | R303 | A1 |
| | | IC108 | *C1 | IC406 | A2 | L401 | *A2 | R122 | C1 | R154 | *C1 | R186 | C1 | R229 | B1 | R261 | *B2 | R304 | *A1 |
| CL101 | C1 | IC109 | *C1 | IC407 | A2 | L402 | C2 | R123 | C1 | R155 | *C1 | R187 | C1 | R230 | B1 | R262 | *B2 | R305 | *A1 |
| CL102 | C1 | IC110 | *C1 | IC408 | A2 | L403 | *B2 | R124 | C1 | R156 | C2 | R188 | C1 | R231 | B1 | R263 | *B2 | R306 | *A1 |
| CL201 | B1 | IC111 | C2 | IC409 | A2 | L404 | C2 | R125 | C1 | R157 | *C1 | R189 | *C1 | R232 | B1 | R264 | *B1 | R307 | *A1 |
| CL202 | B1 | IC112 | C2 | IC410 | A2 | | | R126 | C1 | R158 | *C2 | R190 | *C1 | R233 | B1 | R265 | *B1 | R308 | A1 |
| CL301 | A1 | IC201 | *B1 | IC411 | A2 | Q401 | *B2 | R127 | C1 | R159 | *C2 | R202 | B1 | R234 | B1 | R266 | *B1 | R309 | *A1 |
| CL302 | A1 | IC202 | *B1 | IC412 | A2 | Q402 | *B2 | R128 | C1 | R160 | *C2 | R203 | B1 | R235 | B1 | R267 | B2 | R310 | *A1 |
| | | IC203 | B1 | IC413 | A2 | Q403 | *B2 | R129 | C1 | R161 | *C1 | R204 | *B1 | R236 | B1 | R268 | B2 | R311 | *A1 |
| CN101 | *C1 | IC204 | B1 | IC414 | A2 | Q404 | *B2 | R130 | C1 | R162 | *C2 | R205 | *B1 | R237 | B1 | R269 | B2 | R312 | *A1 |
| CN201 | *B1 | IC206 | B2 | IC415 | A2 | Q405 | C2 | R131 | C1 | R163 | *C2 | R206 | *B1 | R238 | B1 | R270 | C2 | R313 | *A1 |
| CN301 | *A1 | IC207 | B2 | IC416 | A2 | Q406 | C2 | R132 | C1 | R164 | *C1 | R207 | *B1 | R239 | B1 | R271 | B2 | R314 | *A1 |
| CN401 | *A2 | IC208 | *B1 | IC417 | A2 | | | R133 | C1 | R165 | *C1 | R208 | B1 | R240 | *B1 | R272 | *B2 | R315 | B1 |
| CN402 | C2 | IC209 | *B1 | IC418 | B2 | R102 | C1 | R134 | C1 | R166 | *C1 | R209 | *B1 | R241 | B1 | R273 | B2 | R316 | B1 |
| | | IC210 | *B1 | IC419 | *C2 | R103 | C1 | R135 | C1 | R167 | C2 | R210 | *B1 | R242 | B1 | R274 | B2 | R317 | B1 |
| E401 | C2 | IC211 | B2 | IC420 | C2 | R104 | *C1 | R136 | C1 | R168 | C2 | R211 | *B1 | R243 | B1 | R275 | *B2 | R318 | A1 |
| | | IC212 | B2 | IC421 | *C2 | R105 | *C1 | R137 | C1 | R169 | C2 | R212 | *B1 | R244 | B1 | R276 | B2 | R319 | A1 |
| FL101 | *C2 | IC301 | *A1 | IC422 | B2 | R106 | *C1 | R138 | C1 | R170 | C2 | R213 | *B1 | R245 | B2 | R277 | *B2 | R320 | A1 |
| FL102 | *C2 | IC302 | *A1 | IC423 | B2 | R107 | *C1 | R139 | C1 | R171 | C2 | R214 | *B1 | R246 | B2 | R278 | C2 | R321 | A1 |
| FL103 | *C2 | IC303 | A1 | IC424 | *A2 | R108 | C1 | R140 | *C1 | R172 | *C2 | R215 | B1 | R247 | *B2 | R279 | B2 | R322 | A1 |
| FL201 | *B2 | IC304 | A1 | IC425 | *A2 | R109 | *C1 | R141 | C1 | R173 | C2 | R216 | B1 | R248 | *B2 | R280 | *B2 | R323 | A1 |
| FL202 | *B2 | IC306 | A2 | IC426 | *B2 | R110 | *C1 | R142 | C1 | R174 | C2 | R217 | B1 | R249 | *B1 | R281 | B2 | R324 | A1 |
| FL203 | *B2 | IC307 | A2 | IC427 | *C2 | R111 | *C1 | R143 | C1 | R175 | *C2 | R218 | B1 | R250 | *B1 | R282 | B2 | R325 | A1 |
| FL301 | *A2 | IC308 | *A1 | IC428 | *B2 | R112 | *C1 | R144 | C1 | R176 | C2 | R219 | B1 | R251 | B2 | R283 | B2 | R326 | A1 |
| FL302 | *A2 | IC309 | *A1 | IC429 | *A2 | R113 | *C1 | R145 | C1 | R177 | *C2 | R220 | B1 | R252 | B2 | R284 | B2 | R327 | A1 |
| FL303 | *A2 | IC310 | *A1 | IC430 | A2 | R114 | *C1 | R146 | C1 | R178 | C2 | R221 | B1 | R253 | *B1 | R285 | B1 | R328 | A1 |
| | | IC311 | A2 | | | R115 | *C1 | R147 | *C1 | R179 | C2 | R222 | B1 | R254 | *B1 | R286 | B1 | R329 | A1 |

| | | | | | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| R330 | A1 | R432 | *C2 | | | | | | | | | | | | | | | | |
| R331 | B1 | R433 | *C2 | | | | | | | | | | | | | | | | |
| R332 | A1 | R434 | *C2 | | | | | | | | | | | | | | | | |
| R333 | A1 | R435 | *A2 | | | | | | | | | | | | | | | | |
| R334 | A1 | R436 | *A2 | | | | | | | | | | | | | | | | |
| R335 | A1 | R437 | *C2 | | | | | | | | | | | | | | | | |
| R336 | A1 | R438 | C2 | | | | | | | | | | | | | | | | |
| R337 | A1 | R439 | C2 | | | | | | | | | | | | | | | | |
| R338 | A1 | R440 | C2 | | | | | | | | | | | | | | | | |
| R339 | A1 | R441 | C2 | | | | | | | | | | | | | | | | |
| R340 | *A1 | R442 | C2 | | | | | | | | | | | | | | | | |
| R341 | A1 | R443 | C2 | | | | | | | | | | | | | | | | |
| R342 | A1 | R444 | C2 | | | | | | | | | | | | | | | | |
| R343 | A1 | R445 | C2 | | | | | | | | | | | | | | | | |
| R344 | A1 | R446 | C2 | | | | | | | | | | | | | | | | |
| R345 | A2 | R447 | C2 | | | | | | | | | | | | | | | | |
| R346 | A2 | R448 | *C2 | | | | | | | | | | | | | | | | |
| R347 | *A2 | R449 | *C2 | | | | | | | | | | | | | | | | |
| R348 | *A2 | R450 | *B2 | | | | | | | | | | | | | | | | |
| R349 | *A1 | R451 | *B2 | | | | | | | | | | | | | | | | |
| R350 | *A1 | R452 | *B2 | | | | | | | | | | | | | | | | |
| R351 | A2 | R453 | *B2 | | | | | | | | | | | | | | | | |
| R352 | A2 | R454 | *B2 | | | | | | | | | | | | | | | | |
| R353 | *A1 | R455 | *B2 | | | | | | | | | | | | | | | | |
| R354 | *A1 | R456 | B2 | | | | | | | | | | | | | | | | |
| R355 | *A1 | R457 | B2 | | | | | | | | | | | | | | | | |
| R356 | B2 | R458 | B2 | | | | | | | | | | | | | | | | |
| R357 | *A2 | R459 | B2 | | | | | | | | | | | | | | | | |
| R358 | *A2 | R460 | B2 | | | | | | | | | | | | | | | | |
| R359 | *A2 | R461 | B2 | | | | | | | | | | | | | | | | |
| R360 | *A2 | R462 | B2 | | | | | | | | | | | | | | | | |
| R361 | *A2 | R463 | B2 | | | | | | | | | | | | | | | | |
| R362 | *A2 | R464 | B2 | | | | | | | | | | | | | | | | |
| R363 | *A2 | R465 | B2 | | | | | | | | | | | | | | | | |
| R364 | *A1 | R466 | B2 | | | | | | | | | | | | | | | | |
| R365 | *A1 | R467 | B2 | | | | | | | | | | | | | | | | |
| R366 | *A1 | R468 | B2 | | | | | | | | | | | | | | | | |
| R367 | A2 | R469 | *B2 | | | | | | | | | | | | | | | | |
| R368 | A2 | R470 | *B2 | | | | | | | | | | | | | | | | |
| R369 | A2 | R471 | *B2 | | | | | | | | | | | | | | | | |
| R370 | B2 | R472 | *B2 | | | | | | | | | | | | | | | | |
| R371 | A2 | R473 | *B2 | | | | | | | | | | | | | | | | |
| R372 | *A2 | R474 | *B2 | | | | | | | | | | | | | | | | |
| R373 | B2 | R475 | B2 | | | | | | | | | | | | | | | | |
| R374 | A2 | R476 | *C2 | | | | | | | | | | | | | | | | |
| R375 | *A2 | R477 | B2 | | | | | | | | | | | | | | | | |
| R376 | A2 | R478 | B2 | | | | | | | | | | | | | | | | |
| R377 | *A2 | R479 | B2 | | | | | | | | | | | | | | | | |
| R378 | B2 | R480 | B2 | | | | | | | | | | | | | | | | |
| R379 | A2 | R481 | B2 | | | | | | | | | | | | | | | | |
| R380 | *A2 | R482 | B2 | | | | | | | | | | | | | | | | |
| R381 | A2 | R483 | B2 | | | | | | | | | | | | | | | | |
| R382 | A2 | R484 | B2 | | | | | | | | | | | | | | | | |
| R383 | A2 | R485 | B2 | | | | | | | | | | | | | | | | |
| R384 | A2 | R486 | B2 | | | | | | | | | | | | | | | | |
| R385 | A1 | R487 | B2 | | | | | | | | | | | | | | | | |
| R386 | A1 | R488 | B2 | | | | | | | | | | | | | | | | |
| R387 | A1 | R489 | C2 | | | | | | | | | | | | | | | | |
| R388 | A1 | R490 | C2 | | | | | | | | | | | | | | | | |
| R389 | *A1 | R491 | C2 | | | | | | | | | | | | | | | | |
| R390 | *A1 | R492 | C2 | | | | | | | | | | | | | | | | |
| R401 | A2 | R493 | C2 | | | | | | | | | | | | | | | | |
| R402 | A2 | R494 | C2 | | | | | | | | | | | | | | | | |
| R403 | A2 | R495 | *C2 | | | | | | | | | | | | | | | | |
| R404 | A2 | R496 | *C2 | | | | | | | | | | | | | | | | |
| R405 | A2 | R497 | *C2 | | | | | | | | | | | | | | | | |
| R406 | A2 | R498 | *C2 | | | | | | | | | | | | | | | | |
| R407 | A2 | R499 | *C2 | | | | | | | | | | | | | | | | |
| R408 | A2 | R500 | *C2 | | | | | | | | | | | | | | | | |
| R409 | A2 | R501 | *C2 | | | | | | | | | | | | | | | | |
| R410 | A2 | R502 | *C2 | | | | | | | | | | | | | | | | |
| R411 | A2 | R503 | *C2 | | | | | | | | | | | | | | | | |
| R412 | A2 | R504 | *C2 | | | | | | | | | | | | | | | | |
| R413 | A2 | R505 | *C2 | | | | | | | | | | | | | | | | |
| R414 | A2 | R506 | *C2 | | | | | | | | | | | | | | | | |
| R415 | A2 | R507 | *C2 | | | | | | | | | | | | | | | | |
| R416 | A2 | R508 | *C2 | | | | | | | | | | | | | | | | |
| R417 | A2 | R509 | *B2 | | | | | | | | | | | | | | | | |
| R418 | B2 | R510 | *A2 | | | | | | | | | | | | | | | | |
| R419 | *A2 | R511 | A2 | | | | | | | | | | | | | | | | |
| R420 | *A2 | | | | | | | | | | | | | | | | | | |
| R421 | *C2 | RV101 | C1 | | | | | | | | | | | | | | | | |
| R422 | *A2 | RV102 | C1 | | | | | | | | | | | | | | | | |
| R423 | *A2 | RV103 | C1 | | | | | | | | | | | | | | | | |
| R424 | *C2 | RV201 | B1 | | | | | | | | | | | | | | | | |
| R425 | *C2 | RV202 | B1 | | | | | | | | | | | | | | | | |
| R426 | *C2 | RV203 | B1 | | | | | | | | | | | | | | | | |
| R427 | *C2 | RV301 | A1 | | | | | | | | | | | | | | | | |
| R428 | *C2 | RV302 | A1 | | | | | | | | | | | | | | | | |
| R429 | *C2 | RV303 | A1 | | | | | | | | | | | | | | | | |
| R430 | *C2 | | | | | | | | | | | | | | | | | | |
| R431 | *C2 | *:B SIDE | | | | | | | | | | | | | | | | | |

PA-327 (1-865-959-21)
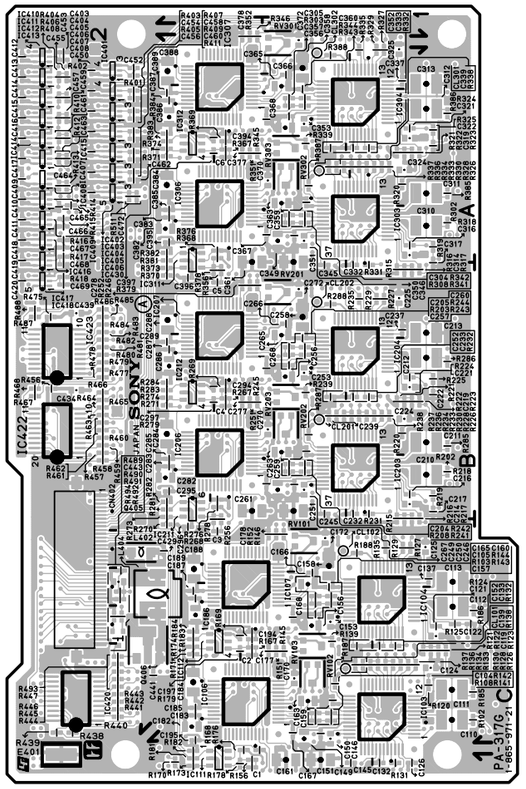
| | | | | | | | |
|---|---|---|---|---|---|---|---|
| C102 | *C1 | C241 | *B1 | C426 | *C2 | IC412 | A2 |
| C103 | *C1 | C242 | B2 | C427 | *C2 | IC413 | A2 |
| C104 | *C1 | C243 | B2 | C428 | *B2 | IC414 | A2 |
| C105 | *C1 | C244 | B2 | C429 | C2 | IC415 | A2 |
| C106 | *C1 | C245 | B2 | C430 | *B2 | IC416 | A2 |
| C107 | C1 | C246 | *B1 | C431 | *B2 | IC417 | A2 |
| C108 | C1 | C247 | *B2 | C432 | *B2 | IC418 | B2 |
| C109 | C1 | C248 | B2 | C433 | *B2 | IC419 | *C2 |
| C110 | C1 | C249 | B2 | C434 | B2 | IC420 | C2 |
| C111 | C1 | C250 | *B1 | C435 | *C2 | IC421 | *C2 |
| C112 | C1 | C251 | *B1 | C436 | *B2 | IC422 | B2 |
| C113 | *C1 | C252 | *B1 | C437 | *C2 | IC423 | B2 |
| C114 | C1 | C253 | *B1 | C438 | *B2 | IC424 | *A2 |
| C115 | *C1 | C254 | B2 | C439 | B2 | IC425 | *A2 |
| C116 | C1 | C302 | *A1 | C440 | *C2 | IC426 | *B2 |
| C117 | *C1 | C303 | *A1 | C441 | C2 | IC427 | *C2 |
| C118 | *C1 | C304 | *A1 | C442 | *C2 | | |
| C119 | *C1 | C305 | *A1 | C443 | C2 | L101 | *C1 |
| C120 | C1 | C306 | *A1 | C444 | *C2 | L201 | *B1 |
| C121 | *C1 | C307 | A1 | C445 | *C2 | L301 | *A1 |
| C122 | *C1 | C308 | A1 | C446 | *C2 | L401 | *A2 |
| C123 | C1 | C309 | A1 | C447 | *C2 | L402 | C2 |
| C124 | *C1 | C310 | A1 | C448 | A2 | L403 | *B2 |
| C125 | C1 | C311 | A1 | C449 | A2 | L404 | C2 |
| C126 | C1 | C312 | A1 | C450 | A2 | | |
| C127 | *C1 | C313 | *A1 | C451 | A2 | Q401 | *B2 |
| C128 | *C1 | C314 | A1 | C452 | A2 | Q402 | *B2 |
| C129 | C1 | C315 | *A1 | C453 | A2 | Q403 | *B2 |
| C130 | C1 | C316 | A1 | C454 | A2 | Q404 | *B2 |
| C131 | C1 | C317 | *A1 | C455 | A2 | Q405 | C2 |
| C132 | C1 | C318 | *A1 | C456 | A2 | Q406 | C2 |
| C133 | C1 | C319 | *A1 | C457 | A2 | | |
| C134 | *C1 | C320 | A1 | C458 | A2 | R102 | *C1 |
| C135 | C1 | C321 | *A1 | C459 | A2 | R103 | *C1 |
| C136 | *C1 | C322 | *A1 | C460 | A2 | R104 | *C1 |
| C137 | C1 | C323 | A1 | C461 | A2 | R105 | *C1 |
| C138 | *C1 | C324 | *A1 | C462 | A2 | R106 | *C1 |
| C139 | *C1 | C325 | A1 | C463 | A2 | R107 | *C1 |
| C140 | C1 | C326 | A1 | C464 | B2 | R108 | *C1 |
| C141 | *C1 | C327 | *A1 | C465 | B2 | R109 | *C1 |
| C142 | C2 | C328 | *A1 | | | R110 | *C1 |
| C143 | C2 | C329 | A1 | CL101 | C1 | R111 | *C1 |
| C144 | C2 | C330 | A1 | CL201 | B1 | R112 | C1 |
| C145 | C2 | C331 | A1 | CL301 | A1 | R113 | *C1 |
| C146 | *C1 | C332 | A2 | CL401 | A2 | R114 | *C1 |
| C147 | *C1 | C333 | A1 | CL402 | A2 | R115 | C1 |
| C148 | C2 | C334 | *A2 | CL403 | A2 | R116 | C1 |
| C149 | C2 | C335 | A1 | CL404 | A2 | R117 | C1 |
| C150 | *C1 | C336 | *A1 | CL405 | A2 | R118 | C1 |
| C151 | *C1 | C337 | A1 | CL406 | A2 | R119 | C1 |
| C152 | *C1 | C338 | *A1 | | | R120 | C1 |
| C153 | *C1 | C339 | *A1 | CN101 | *C1 | R121 | C1 |
| C154 | C2 | C340 | A2 | CN201 | *B1 | R122 | C1 |
| C202 | *B1 | C341 | *A1 | CN301 | *A1 | R123 | C1 |
| C203 | *B1 | C342 | A2 | CN401 | *A2 | R124 | C1 |
| C204 | *B1 | C343 | A2 | CN402 | C2 | R125 | C1 |
| C205 | *B1 | C344 | A2 | | | R126 | C1 |
| C206 | *B1 | C345 | A2 | E401 | C2 | R127 | C1 |
| C207 | B1 | C346 | *A1 | | | R128 | C1 |
| C208 | B1 | C347 | *A2 | FL101 | *C2 | R129 | C1 |
| C209 | B1 | C348 | A2 | FL201 | *B2 | R130 | C1 |
| C210 | B1 | C349 | A2 | FL301 | *A2 | R131 | C1 |
| C211 | B1 | C350 | *A1 | | | R132 | *C1 |
| C212 | B1 | C351 | *A1 | IC101 | *C1 | R133 | *C1 |
| C213 | *B1 | C352 | *A1 | IC102 | *C1 | R134 | C1 |
| C214 | B1 | C353 | *A1 | IC103 | C1 | R135 | *C1 |
| C215 | *B1 | C354 | A2 | IC104 | C2 | R136 | C1 |
| C216 | B1 | C401 | *A2 | IC105 | *C1 | R137 | *C1 |
| C217 | *B1 | C402 | *A2 | IC106 | C2 | R138 | *C1 |
| C218 | *B1 | C403 | A2 | IC201 | *B1 | R139 | *C1 |
| C219 | *B1 | C404 | A2 | IC202 | *B1 | R140 | *C2 |
| C220 | B1 | C405 | A2 | IC203 | B1 | R141 | C2 |
| C221 | *B1 | C406 | A2 | IC204 | B2 | R142 | C2 |
| C222 | *B1 | C407 | A2 | IC205 | *B1 | R143 | C2 |
| C223 | B1 | C408 | A2 | IC206 | B2 | R144 | C2 |
| C224 | *B1 | C409 | A2 | IC301 | *A1 | R145 | C2 |
| C225 | B1 | C410 | A2 | IC302 | *A1 | R146 | C2 |
| C226 | B1 | C411 | A2 | IC303 | A1 | R147 | C2 |
| C227 | *B1 | C412 | A2 | IC304 | A2 | R148 | C2 |
| C228 | *B1 | C413 | A2 | IC305 | *A1 | R149 | C2 |
| C229 | B1 | C414 | A2 | IC306 | A2 | R150 | *C1 |
| C230 | B1 | C415 | A2 | IC401 | A2 | R151 | *C1 |
| C231 | B1 | C416 | A2 | IC402 | A2 | R152 | *C1 |
| C232 | B2 | C417 | A2 | IC403 | A2 | R153 | *C1 |
| C233 | B1 | C418 | A2 | IC404 | A2 | R154 | C2 |
| C234 | *B2 | C419 | A2 | IC405 | A2 | R155 | *C1 |
| C235 | B1 | C420 | B2 | IC406 | A2 | R156 | *C1 |
| C236 | *B1 | C421 | *A2 | IC407 | A2 | R202 | *B1 |
| C237 | B1 | C422 | *A2 | IC408 | A2 | R203 | *B1 |
| C238 | *B1 | C423 | *C2 | IC409 | A2 | R204 | *B1 |
| C239 | *B1 | C424 | *A2 | IC410 | A2 | R205 | *B1 |
| C240 | B2 | C425 | *B2 | IC411 | A2 | R206 | *B1 |

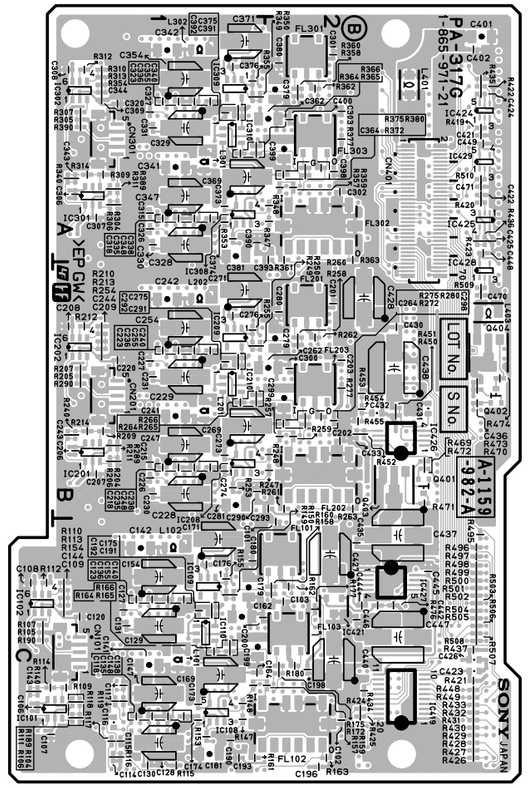


**PA-327** -A SIDE-
SUFFIX: -21




**PA-327** -B SIDE-
SUFFIX: -21

| | | | | | |
|---|---|---|---|---|---|
| R207 | *B1 | R344 | A2 | R480 | *C2 |
| R208 | *B1 | R345 | A2 | R481 | *C2 |
| R209 | *B1 | R346 | A2 | R482 | *C2 |
| R210 | *B1 | R347 | A2 | R483 | *C2 |
| R211 | *B1 | R348 | A2 | R484 | *C2 |
| R212 | B1 | R349 | A2 | R485 | *C2 |
| R213 | *B1 | R350 | *A1 | R486 | *C2 |
| R214 | *B1 | R351 | *A1 | R487 | *C2 |
| R215 | B1 | R352 | *A1 | R488 | *C2 |
| R216 | B1 | R353 | *A1 | R489 | *C2 |
| R217 | B1 | R354 | A2 | R490 | *C2 |
| R218 | B1 | R355 | *A1 | R491 | *C2 |
| R219 | B1 | R356 | *A1 | R492 | *C2 |
| R220 | B1 | R401 | A2 | R493 | *C2 |
| R221 | B1 | R402 | A2 | R494 | *A1 |
| R222 | B1 | R403 | A2 | | |
| R223 | B1 | R404 | A2 | RV101 | C1 |
| R224 | B1 | R405 | A2 | RV201 | B1 |
| R225 | B1 | R406 | A2 | RV301 | A1 |
| R226 | B1 | R407 | A2 | | |
| R227 | B1 | R408 | A2 | *:B SIDE | |
| R228 | B1 | R409 | A2 | | |
| R229 | B1 | R410 | A2 | | |
| R230 | B1 | R411 | A2 | | |
| R231 | B1 | R412 | A2 | | |
| R232 | *B2 | R413 | A2 | | |
| R233 | *B2 | R414 | A2 | | |
| R234 | B1 | R415 | A2 | | |
| R235 | *B1 | R416 | A2 | | |
| R236 | B1 | R417 | A2 | | |
| R237 | *B2 | R418 | B2 | | |
| R238 | *B2 | R419 | *A2 | | |
| R239 | *B2 | R420 | *A2 | | |
| R240 | *B2 | R421 | *C2 | | |
| R241 | B2 | R422 | *A2 | | |
| R242 | B2 | R423 | *B2 | | |
| R243 | B2 | R424 | *C2 | | |
| R244 | B2 | R425 | *C2 | | |
| R245 | B2 | R426 | *C2 | | |
| R246 | B2 | R427 | *C2 | | |
| R247 | B2 | R428 | *C2 | | |
| R248 | B2 | R429 | *C2 | | |
| R249 | B2 | R430 | *A2 | | |
| R250 | *B1 | R431 | *B2 | | |
| R251 | *B1 | R432 | *C2 | | |
| R252 | *B1 | R433 | C2 | | |
| R253 | *B1 | R434 | C2 | | |
| R254 | B2 | R435 | C2 | | |
| R255 | *B1 | R436 | C2 | | |
| R256 | *B1 | R437 | C2 | | |
| R302 | *A1 | R438 | C2 | | |
| R303 | *A1 | R439 | *C2 | | |
| R304 | *A1 | R440 | *C2 | | |
| R305 | *A1 | R441 | *B2 | | |
| R306 | *A1 | R442 | *B2 | | |
| R307 | *A1 | R443 | *B2 | | |
| R308 | *A1 | R444 | *B2 | | |
| R309 | *A1 | R445 | *B2 | | |
| R310 | *A1 | R446 | *B2 | | |
| R311 | *A1 | R447 | B2 | | |
| R312 | A1 | R448 | B2 | | |
| R313 | *A1 | R449 | B2 | | |
| R314 | *A1 | R450 | B2 | | |
| R315 | A1 | R451 | B2 | | |
| R316 | A1 | R452 | B2 | | |
| R317 | A1 | R453 | B2 | | |
| R318 | A1 | R454 | B2 | | |
| R319 | A1 | R455 | B2 | | |
| R320 | A1 | R456 | *B2 | | |
| R321 | A1 | R457 | *B2 | | |
| R322 | A1 | R458 | *B2 | | |
| R323 | A1 | R459 | *B2 | | |
| R324 | A1 | R460 | *B2 | | |
| R325 | A1 | R461 | *B2 | | |
| R326 | A1 | R462 | B2 | | |
| R327 | A1 | R463 | *C2 | | |
| R328 | A1 | R464 | B2 | | |
| R329 | A1 | R465 | B2 | | |
| R330 | A1 | R466 | B2 | | |
| R331 | A1 | R467 | B2 | | |
| R332 | *A2 | R468 | B2 | | |
| R333 | *A2 | R469 | B2 | | |
| R334 | A1 | R470 | B2 | | |
| R335 | *A1 | R471 | B2 | | |
| R336 | A1 | R472 | C2 | | |
| R337 | *A2 | R473 | C2 | | |
| R338 | *A2 | R474 | C2 | | |
| R339 | *A2 | R475 | C2 | | |
| R340 | *A2 | R476 | C2 | | |
| R341 | A2 | R477 | C2 | | |
| R342 | A2 | R478 | *C2 | | |
| R343 | A2 | R479 | *C2 | | |

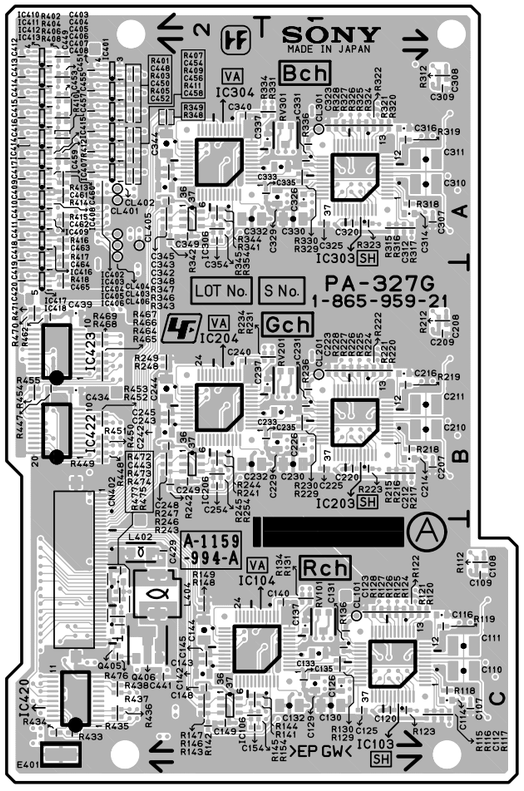PA-317 (1-865-971-22)

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| C1 | C2 | C188 | C2 | C281 | *B1 | C374 | *A1 |
| C2 | C2 | C189 | C2 | C282 | B2 | C375 | *A1 |
| C3 | C2 | C190 | *C1 | C283 | B2 | C376 | *A1 |
| C4 | B2 | C191 | *C1 | C284 | B2 | C377 | A2 |
| C5 | B2 | C192 | *C1 | C285 | B2 | C378 | A2 |
| C6 | A2 | C193 | *C1 | C286 | B2 | C379 | *A2 |
| C101 | *C2 | C194 | C2 | C287 | B2 | C380 | *A2 |
| C102 | *C2 | C195 | C2 | C288 | B2 | C381 | *A1 |
| C103 | *C2 | C196 | *C2 | C289 | B2 | C382 | A2 |
| C104 | C1 | C197 | C2 | C290 | *B1 | C383 | A2 |
| C105 | C1 | C198 | *C2 | C291 | *B1 | C384 | A2 |
| C106 | *C1 | C199 | *C1 | C292 | *B1 | C385 | A2 |
| C107 | *C1 | C200 | *C1 | C293 | *B2 | C386 | A2 |
| C108 | *C1 | C201 | *B2 | C294 | B2 | C387 | A2 |
| C109 | *C1 | C202 | *B2 | C295 | B2 | C388 | A2 |
| C110 | C1 | C203 | *B2 | C296 | C2 | C389 | A2 |
| C111 | C1 | C204 | B1 | C297 | B2 | C390 | *A1 |
| C112 | C1 | C205 | B1 | C298 | *B2 | C391 | *A1 |
| C113 | C1 | C206 | *B1 | C299 | *B2 | C392 | *A1 |
| C114 | *C1 | C207 | *B1 | C300 | *B2 | C393 | *A2 |
| C115 | *C1 | C208 | *B1 | C301 | *A2 | C394 | A2 |
| C116 | *C1 | C209 | *B1 | C302 | *A2 | C395 | A2 |
| C117 | *C1 | C210 | B1 | C303 | *A2 | C396 | B2 |
| C118 | *C1 | C211 | B1 | C304 | A1 | C397 | A2 |
| C119 | C1 | C212 | B1 | C305 | A1 | C398 | *A2 |
| C120 | *C1 | C213 | B1 | C306 | *A1 | C399 | *A2 |
| C121 | C1 | C214 | B1 | C307 | *A1 | C400 | *A2 |
| C122 | C1 | C215 | *B1 | C308 | *A1 | C401 | *A2 |
| C123 | *C1 | C216 | B1 | C309 | *A1 | C402 | *A2 |
| C124 | C1 | C217 | B1 | C310 | A1 | C403 | A2 |
| C125 | C1 | C218 | *B1 | C311 | A1 | C404 | A2 |
| C126 | C1 | C219 | B1 | C312 | A1 | C405 | A2 |
| C127 | *C1 | C220 | *B1 | C313 | A1 | C406 | A2 |
| C128 | *C1 | C221 | B1 | C314 | B1 | C407 | A2 |
| C129 | *C1 | C222 | B1 | C315 | *A1 | C408 | A2 |
| C130 | *C1 | C223 | *B1 | C316 | A1 | C409 | A2 |
| C131 | *C1 | C224 | B1 | C317 | B1 | C410 | A2 |
| C132 | C1 | C225 | B1 | C318 | *A1 | C411 | A2 |
| C133 | C1 | C226 | *B1 | C319 | A1 | C412 | A2 |
| C135 | *C1 | C227 | *B1 | C320 | *A1 | C413 | A2 |
| C136 | *C1 | C228 | *B1 | C321 | A1 | C414 | A2 |
| C137 | C1 | C229 | *B1 | C322 | A1 | C415 | A2 |
| C138 | *C1 | C230 | *B1 | C323 | *A1 | C416 | A2 |
| C139 | C1 | C231 | *B1 | C324 | A1 | C417 | A2 |
| C140 | *C1 | C232 | B1 | C325 | A1 | C418 | A2 |
| C141 | *C1 | C233 | B1 | C326 | *A1 | C419 | A2 |
| C142 | *C1 | C235 | *B1 | C327 | *A1 | C420 | B2 |
| C143 | *C1 | C236 | *B1 | C328 | *A1 | C421 | *A2 |
| C144 | *C1 | C237 | B1 | C329 | *A1 | C422 | *A2 |
| C145 | C1 | C238 | *B1 | C330 | *A1 | C423 | *C2 |
| C146 | C1 | C239 | B1 | C331 | *A1 | C424 | *A2 |
| C147 | *C1 | C240 | *B1 | C332 | B1 | C425 | *A2 |
| C148 | *C1 | C241 | *B1 | C333 | A1 | C426 | *C2 |
| C149 | C1 | C242 | *B1 | C335 | *A1 | C427 | *C2 |
| C150 | C1 | C243 | *B1 | C336 | *A1 | C428 | *B2 |
| C151 | C1 | C244 | *B1 | C337 | A1 | C429 | C2 |
| C152 | C1 | C245 | B1 | C338 | *A1 | C430 | *B2 |
| C153 | C1 | C246 | B1 | C339 | A1 | C431 | *B2 |
| C154 | *C1 | C247 | *B1 | C340 | *A1 | C432 | *B2 |
| C155 | *C1 | C248 | *B1 | C341 | *A1 | C433 | *B2 |
| C156 | C1 | C249 | B1 | C342 | *A1 | C434 | B2 |
| C157 | C1 | C250 | B1 | C343 | *A1 | C435 | *C2 |
| C158 | C1 | C251 | B1 | C344 | *A1 | C436 | *B2 |
| C159 | C1 | C252 | B1 | C345 | B1 | C437 | *C2 |
| C160 | C1 | C253 | B1 | C346 | A1 | C438 | *B2 |
| C161 | C1 | C254 | *B1 | C347 | *A1 | C439 | B2 |
| C162 | *C1 | C255 | *B1 | C348 | *A1 | C440 | *C2 |
| C163 | C1 | C256 | B1 | C349 | A1 | C441 | C2 |
| C164 | *C1 | C257 | B1 | C350 | A1 | C442 | *C2 |
| C165 | C1 | C258 | B1 | C351 | A1 | C443 | C2 |
| C166 | C1 | C259 | B1 | C352 | A1 | C444 | *C2 |
| C167 | C1 | C260 | B1 | C353 | A1 | C445 | *C2 |
| C168 | C1 | C261 | B2 | C354 | *A1 | C446 | *C2 |
| C169 | *C1 | C262 | *B2 | C355 | *A1 | C447 | *C2 |
| C170 | C1 | C263 | B1 | C356 | A1 | C448 | *A2 |
| C171 | *C1 | C264 | *B2 | C357 | A1 | C449 | *A2 |
| C172 | C1 | C265 | B1 | C358 | A1 | C450 | A2 |
| C173 | *C1 | C266 | B1 | C359 | A1 | C452 | A2 |
| C174 | *C1 | C267 | B1 | C360 | A1 | C453 | A2 |
| C175 | *C1 | C268 | B1 | C361 | A2 | C454 | A2 |
| C176 | *C1 | C269 | *B1 | C362 | *A2 | C455 | A2 |
| C177 | C1 | C270 | B1 | C363 | A1 | C456 | A2 |
| C178 | C1 | C271 | *B1 | C364 | *A2 | C457 | A2 |
| C179 | *C1 | C272 | B1 | C365 | A1 | C458 | A2 |
| C180 | *C1 | C273 | *B1 | C366 | A1 | C459 | A2 |
| C181 | *C1 | C274 | *B1 | C367 | A1 | C460 | A2 |
| C182 | C2 | C275 | *B1 | C368 | A1 | C461 | A2 |
| C183 | C2 | C276 | *B1 | C369 | *A1 | C462 | A2 |
| C184 | C2 | C277 | B2 | C370 | A1 | C463 | A2 |
| C185 | C2 | C278 | B2 | C371 | *A1 | C464 | A2 |
| C186 | C2 | C279 | *B2 | C372 | A1 | C465 | A2 |
| C187 | C2 | C280 | *B2 | C373 | *A1 | C466 | A2 |

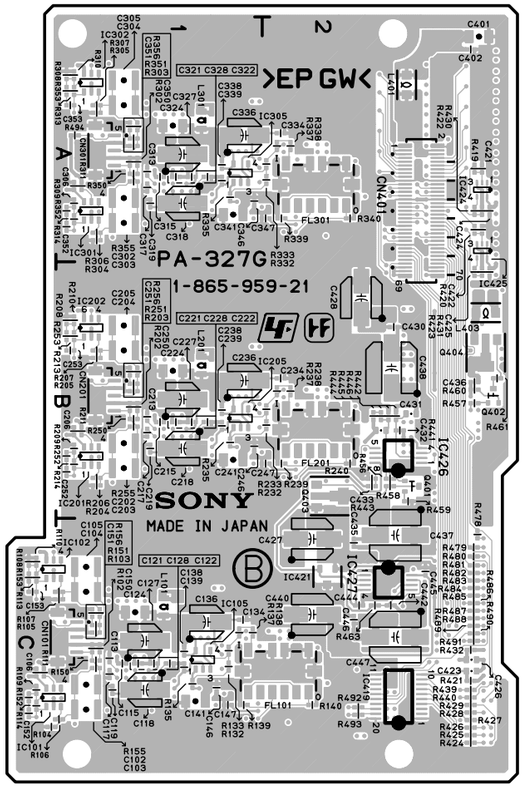

**PA-317** -A SIDE-
SUFFIX: -22



**PA-317** -B SIDE-
SUFFIX: -22

| | | | | | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| C467 | A2 | IC101 | *C1 | IC312 | A2 | L101 | *C1 | R116 | *C1 | R148 | *C1 | R180 | *C2 | R223 | B1 | R255 | *B1 | R287 | B1 |
| C468 | B2 | IC102 | *C1 | IC401 | A2 | L102 | *C1 | R117 | *C1 | R149 | *C1 | R181 | C2 | R224 | B1 | R256 | C2 | R288 | B1 |
| C469 | B2 | IC103 | C1 | IC402 | A2 | L201 | *B1 | R118 | *C1 | R150 | *C1 | R182 | C2 | R225 | B1 | R257 | *B2 | R289 | *B1 |
| C470 | *B2 | IC104 | C1 | IC403 | A2 | L202 | *B1 | R119 | *C1 | R151 | C1 | R183 | C2 | R226 | B1 | R258 | *B2 | R290 | *B1 |
| C471 | *A2 | IC106 | C2 | IC404 | A2 | L301 | *A1 | R120 | C1 | R152 | C1 | R184 | C2 | R227 | B1 | R259 | *B2 | R302 | A1 |
| C472 | A2 | IC107 | C2 | IC405 | A2 | L302 | *A1 | R121 | C1 | R153 | *C1 | R185 | C1 | R228 | B1 | R260 | *B2 | R303 | A1 |
| | | IC108 | *C1 | IC406 | A2 | L401 | *A2 | R122 | C1 | R154 | *C1 | R186 | C1 | R229 | B1 | R261 | *B2 | R304 | *A1 |
| CL101 | C1 | IC109 | *C1 | IC407 | A2 | L402 | C2 | R123 | C1 | R155 | *C1 | R187 | C1 | R230 | B1 | R262 | *B2 | R305 | *A1 |
| CL102 | C1 | IC110 | *C1 | IC408 | A2 | L403 | *B2 | R124 | C1 | R156 | C2 | R188 | C1 | R231 | B1 | R263 | *B2 | R306 | *A1 |
| CL201 | B1 | IC111 | C2 | IC409 | A2 | L404 | C2 | R125 | C1 | R157 | *C1 | R189 | *C1 | R232 | B1 | R264 | *B1 | R307 | *A1 |
| CL202 | B1 | IC112 | C2 | IC410 | A2 | | | R126 | C1 | R158 | *C2 | R190 | *C1 | R233 | B1 | R265 | *B1 | R308 | A1 |
| CL301 | A1 | IC201 | *B1 | IC411 | A2 | Q401 | *B2 | R127 | C1 | R159 | *C2 | R202 | B1 | R234 | B1 | R266 | *B1 | R309 | *A1 |
| CL302 | A1 | IC202 | *B1 | IC412 | A2 | Q402 | *B2 | R128 | C1 | R160 | *C2 | R203 | B1 | R235 | B1 | R267 | B2 | R310 | *A1 |
| | | IC203 | B1 | IC413 | A2 | Q403 | *B2 | R129 | C1 | R161 | *C1 | R204 | *B1 | R236 | B1 | R268 | B2 | R311 | *A1 |
| CN101 | *C1 | IC204 | B1 | IC414 | A2 | Q404 | *B2 | R130 | C1 | R162 | *C2 | R205 | *B1 | R237 | B1 | R269 | B2 | R312 | *A1 |
| CN201 | *B1 | IC206 | B2 | IC415 | A2 | Q405 | C2 | R131 | C1 | R163 | *C2 | R206 | *B1 | R238 | B1 | R270 | C2 | R313 | *A1 |
| CN301 | *A1 | IC207 | B2 | IC416 | A2 | Q406 | C2 | R132 | C1 | R164 | *C1 | R207 | *B1 | R239 | B1 | R271 | B2 | R314 | *A1 |
| CN401 | *A2 | IC208 | *B1 | IC417 | A2 | | | R133 | C1 | R165 | *C1 | R208 | B1 | R240 | *B1 | R272 | *B2 | R315 | B1 |
| CN402 | C2 | IC209 | *B1 | IC418 | B2 | R102 | C1 | R134 | C1 | R166 | *C1 | R209 | *B1 | R241 | B1 | R273 | B2 | R316 | B1 |
| | | IC210 | *B1 | IC419 | *C2 | R103 | C1 | R135 | C1 | R167 | C2 | R210 | *B1 | R242 | B1 | R274 | B2 | R317 | B1 |
| E401 | C2 | IC211 | B2 | IC420 | C2 | R104 | *C1 | R136 | C1 | R168 | C2 | R211 | *B1 | R243 | B1 | R275 | *B2 | R318 | A1 |
| | | IC212 | B2 | IC421 | *C2 | R105 | *C1 | R137 | C1 | R169 | C2 | R212 | *B1 | R244 | B1 | R276 | B2 | R319 | A1 |
| FL101 | *C2 | IC301 | *A1 | IC422 | B2 | R106 | *C1 | R138 | C1 | R170 | C2 | R213 | *B1 | R245 | B2 | R277 | *B2 | R320 | A1 |
| FL102 | *C2 | IC302 | *A1 | IC423 | B2 | R107 | *C1 | R139 | C1 | R171 | C2 | R214 | *B1 | R246 | B2 | R278 | C2 | R321 | A1 |
| FL103 | *C2 | IC303 | A1 | IC424 | *A2 | R108 | C1 | R140 | *C1 | R172 | *C2 | R215 | B1 | R247 | *B2 | R279 | B2 | R322 | A1 |
| FL201 | *B2 | IC304 | A1 | IC425 | *A2 | R109 | *C1 | R141 | C1 | R173 | C2 | R216 | B1 | R248 | *B2 | R280 | *B2 | R323 | A1 |
| FL202 | *B2 | IC306 | A2 | IC426 | *B2 | R110 | *C1 | R142 | C1 | R174 | C2 | R217 | B1 | R249 | *B1 | R281 | B2 | R324 | A1 |
| FL203 | *B2 | IC307 | A2 | IC427 | *C2 | R111 | *C1 | R143 | C1 | R175 | *C2 | R218 | B1 | R250 | *B1 | R282 | B2 | R325 | A1 |
| FL301 | *A2 | IC308 | *A1 | IC428 | *B2 | R112 | *C1 | R144 | C1 | R176 | C2 | R219 | B1 | R251 | B2 | R283 | B2 | R326 | A1 |
| FL302 | *A2 | IC309 | *A1 | IC429 | *A2 | R113 | *C1 | R145 | C1 | R177 | *C2 | R220 | B1 | R252 | B2 | R284 | B2 | R327 | A1 |
| FL303 | *A2 | IC310 | *A1 | IC430 | A2 | R114 | *C1 | R146 | C1 | R178 | C2 | R221 | B1 | R253 | *B1 | R285 | B1 | R328 | A1 |
| | | IC311 | A2 | | | R115 | *C1 | R147 | *C1 | R179 | C2 | R222 | B1 | R254 | *B1 | R286 | B1 | R329 | A1 |

| | | | | | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| R330 | A1 | R432 | *C2 | | | | | | | | | | | | | | | | |
| R331 | B1 | R433 | *C2 | | | | | | | | | | | | | | | | |
| R332 | A1 | R434 | *C2 | | | | | | | | | | | | | | | | |
| R333 | A1 | R435 | *A2 | | | | | | | | | | | | | | | | |
| R334 | A1 | R436 | *A2 | | | | | | | | | | | | | | | | |
| R335 | A1 | R437 | *C2 | | | | | | | | | | | | | | | | |
| R336 | A1 | R438 | C2 | | | | | | | | | | | | | | | | |
| R337 | A1 | R439 | C2 | | | | | | | | | | | | | | | | |
| R338 | A1 | R440 | C2 | | | | | | | | | | | | | | | | |
| R339 | A1 | R441 | C2 | | | | | | | | | | | | | | | | |
| R340 | *A1 | R442 | C2 | | | | | | | | | | | | | | | | |
| R341 | A1 | R443 | C2 | | | | | | | | | | | | | | | | |
| R342 | A1 | R444 | C2 | | | | | | | | | | | | | | | | |
| R343 | A1 | R445 | C2 | | | | | | | | | | | | | | | | |
| R344 | A1 | R446 | C2 | | | | | | | | | | | | | | | | |
| R345 | A2 | R447 | C2 | | | | | | | | | | | | | | | | |
| R346 | A2 | R448 | *C2 | | | | | | | | | | | | | | | | |
| R347 | *A2 | R449 | *C2 | | | | | | | | | | | | | | | | |
| R348 | *A2 | R450 | *B2 | | | | | | | | | | | | | | | | |
| R349 | *A1 | R451 | *B2 | | | | | | | | | | | | | | | | |
| R350 | *A1 | R452 | *B2 | | | | | | | | | | | | | | | | |
| R351 | A2 | R453 | *B2 | | | | | | | | | | | | | | | | |
| R352 | A2 | R454 | *B2 | | | | | | | | | | | | | | | | |
| R353 | *A1 | R455 | *B2 | | | | | | | | | | | | | | | | |
| R354 | *A1 | R456 | B2 | | | | | | | | | | | | | | | | |
| R355 | *A1 | R457 | B2 | | | | | | | | | | | | | | | | |
| R356 | B2 | R458 | B2 | | | | | | | | | | | | | | | | |
| R357 | *A2 | R459 | B2 | | | | | | | | | | | | | | | | |
| R358 | *A2 | R460 | B2 | | | | | | | | | | | | | | | | |
| R359 | *A2 | R461 | B2 | | | | | | | | | | | | | | | | |
| R360 | *A2 | R462 | B2 | | | | | | | | | | | | | | | | |
| R361 | *A2 | R463 | B2 | | | | | | | | | | | | | | | | |
| R362 | *A2 | R464 | B2 | | | | | | | | | | | | | | | | |
| R363 | *A2 | R465 | B2 | | | | | | | | | | | | | | | | |
| R364 | *A1 | R466 | B2 | | | | | | | | | | | | | | | | |
| R365 | *A1 | R467 | B2 | | | | | | | | | | | | | | | | |
| R366 | *A1 | R468 | B2 | | | | | | | | | | | | | | | | |
| R367 | A2 | R469 | *B2 | | | | | | | | | | | | | | | | |
| R368 | A2 | R470 | *B2 | | | | | | | | | | | | | | | | |
| R369 | A2 | R471 | *B2 | | | | | | | | | | | | | | | | |
| R370 | B2 | R472 | *B2 | | | | | | | | | | | | | | | | |
| R371 | A2 | R473 | *B2 | | | | | | | | | | | | | | | | |
| R372 | *A2 | R474 | *B2 | | | | | | | | | | | | | | | | |
| R373 | B2 | R475 | B2 | | | | | | | | | | | | | | | | |
| R374 | A2 | R476 | *C2 | | | | | | | | | | | | | | | | |
| R375 | *A2 | R477 | B2 | | | | | | | | | | | | | | | | |
| R376 | A2 | R478 | B2 | | | | | | | | | | | | | | | | |
| R377 | *A2 | R479 | B2 | | | | | | | | | | | | | | | | |
| R378 | B2 | R480 | B2 | | | | | | | | | | | | | | | | |
| R379 | A2 | R481 | B2 | | | | | | | | | | | | | | | | |
| R380 | *A2 | R482 | B2 | | | | | | | | | | | | | | | | |
| R381 | A2 | R483 | B2 | | | | | | | | | | | | | | | | |
| R382 | A2 | R484 | B2 | | | | | | | | | | | | | | | | |
| R383 | A2 | R485 | B2 | | | | | | | | | | | | | | | | |
| R384 | A2 | R486 | B2 | | | | | | | | | | | | | | | | |
| R385 | A1 | R487 | B2 | | | | | | | | | | | | | | | | |
| R386 | A1 | R488 | B2 | | | | | | | | | | | | | | | | |
| R387 | A1 | R489 | C2 | | | | | | | | | | | | | | | | |
| R388 | A1 | R490 | C2 | | | | | | | | | | | | | | | | |
| R389 | *A1 | R491 | C2 | | | | | | | | | | | | | | | | |
| R390 | *A1 | R492 | C2 | | | | | | | | | | | | | | | | |
| R401 | A2 | R493 | C2 | | | | | | | | | | | | | | | | |
| R402 | A2 | R494 | C2 | | | | | | | | | | | | | | | | |
| R403 | A2 | R495 | *C2 | | | | | | | | | | | | | | | | |
| R404 | A2 | R496 | *C2 | | | | | | | | | | | | | | | | |
| R405 | A2 | R497 | *C2 | | | | | | | | | | | | | | | | |
| R406 | A2 | R498 | *C2 | | | | | | | | | | | | | | | | |
| R407 | A2 | R499 | *C2 | | | | | | | | | | | | | | | | |
| R408 | A2 | R500 | *C2 | | | | | | | | | | | | | | | | |
| R409 | A2 | R501 | *C2 | | | | | | | | | | | | | | | | |
| R410 | A2 | R502 | *C2 | | | | | | | | | | | | | | | | |
| R411 | A2 | R503 | *C2 | | | | | | | | | | | | | | | | |
| R412 | A2 | R504 | *C2 | | | | | | | | | | | | | | | | |
| R413 | A2 | R505 | *C2 | | | | | | | | | | | | | | | | |
| R414 | A2 | R506 | *C2 | | | | | | | | | | | | | | | | |
| R415 | A2 | R507 | *C2 | | | | | | | | | | | | | | | | |
| R416 | A2 | R508 | *C2 | | | | | | | | | | | | | | | | |
| R417 | A2 | R509 | *B2 | | | | | | | | | | | | | | | | |
| R418 | B2 | R510 | *A2 | | | | | | | | | | | | | | | | |
| R419 | *A2 | R511 | A2 | | | | | | | | | | | | | | | | |
| R420 | *A2 | R512 | *C2 | | | | | | | | | | | | | | | | |
| R421 | *C2 | | | | | | | | | | | | | | | | | | |
| R422 | *A2 | RV101 | C1 | | | | | | | | | | | | | | | | |
| R423 | *A2 | RV102 | C1 | | | | | | | | | | | | | | | | |
| R424 | *C2 | RV103 | C1 | | | | | | | | | | | | | | | | |
| R425 | *C2 | RV201 | B1 | | | | | | | | | | | | | | | | |
| R426 | *C2 | RV202 | B1 | | | | | | | | | | | | | | | | |
| R427 | *C2 | RV203 | B1 | | | | | | | | | | | | | | | | |
| R428 | *C2 | RV301 | A1 | | | | | | | | | | | | | | | | |
| R429 | *C2 | RV302 | A1 | | | | | | | | | | | | | | | | |
| R430 | *C2 | RV303 | A1 | | | | | | | | | | | | | | | | |
| R431 | *C2 | | | | | | | | | | | | | | | | | | |

*:B SIDE

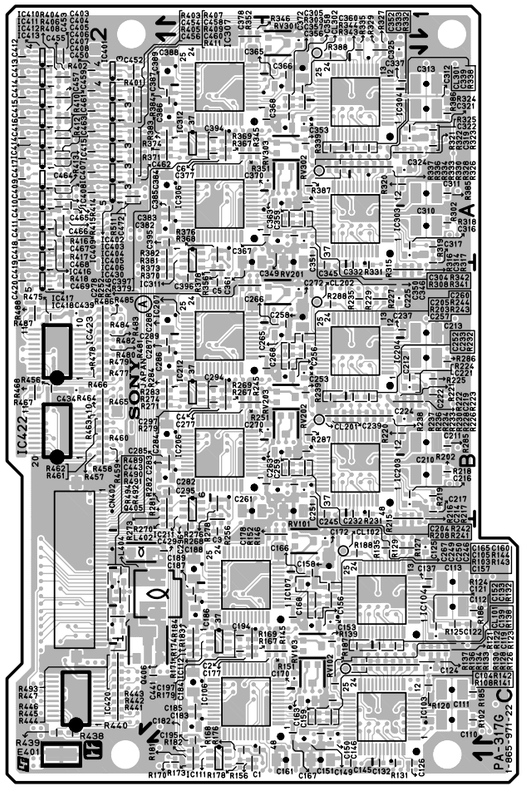PA-327 (1-865-959-22)
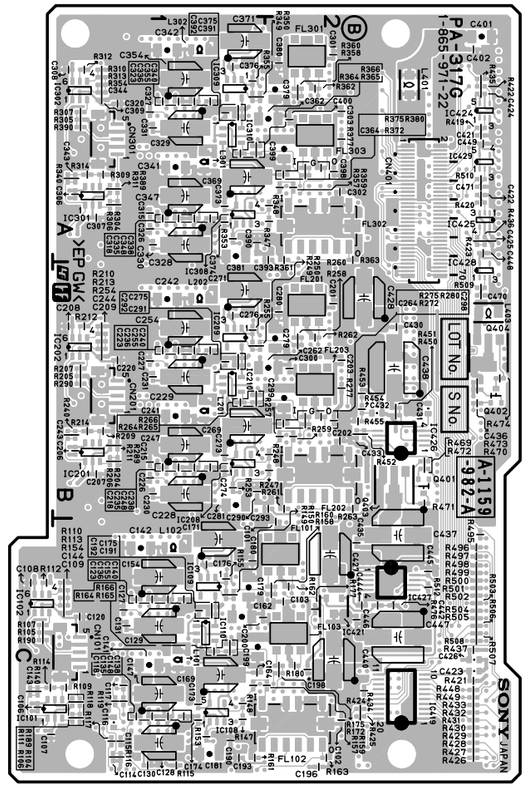
| | | | | | | | |
|---|---|---|---|---|---|---|---|
| C102 | *C1 | C241 | *B1 | C426 | *C2 | IC412 | A2 |
| C103 | *C1 | C242 | B2 | C427 | *C2 | IC413 | A2 |
| C104 | *C1 | C243 | B2 | C428 | *B2 | IC414 | A2 |
| C105 | *C1 | C244 | B2 | C429 | C2 | IC415 | A2 |
| C106 | *C1 | C245 | B2 | C430 | *B2 | IC416 | A2 |
| C107 | C1 | C246 | *B1 | C431 | *B2 | IC417 | A2 |
| C108 | C1 | C247 | *B2 | C432 | *B2 | IC418 | B2 |
| C109 | C1 | C248 | B2 | C433 | *B2 | IC419 | *C2 |
| C110 | C1 | C249 | B2 | C434 | B2 | IC420 | C2 |
| C111 | C1 | C250 | *B1 | C435 | *C2 | IC421 | *C2 |
| C112 | C1 | C251 | *B1 | C436 | *B2 | IC422 | B2 |
| C113 | *C1 | C252 | *B1 | C437 | *C2 | IC423 | B2 |
| C114 | C1 | C253 | *B1 | C438 | *B2 | IC424 | *A2 |
| C115 | *C1 | C254 | B2 | C439 | B2 | IC425 | *A2 |
| C116 | C1 | C302 | *A1 | C440 | *C2 | IC426 | *B2 |
| C117 | *C1 | C303 | *A1 | C441 | C2 | IC427 | *C2 |
| C118 | *C1 | C304 | *A1 | C442 | *C2 | | |
| C119 | *C1 | C305 | *A1 | C443 | C2 | L101 | *C1 |
| C120 | C1 | C306 | *A1 | C444 | *C2 | L201 | *B1 |
| C121 | *C1 | C307 | A1 | C445 | *C2 | L301 | *A1 |
| C122 | *C1 | C308 | A1 | C446 | *C2 | L401 | *A2 |
| C123 | C1 | C309 | A1 | C447 | *C2 | L402 | C2 |
| C124 | *C1 | C310 | A1 | C448 | A2 | L403 | *B2 |
| C125 | C1 | C311 | A1 | C449 | A2 | L404 | C2 |
| C126 | C1 | C312 | A1 | C450 | A2 | | |
| C127 | *C1 | C313 | *A1 | C451 | A2 | Q401 | *B2 |
| C128 | *C1 | C314 | A1 | C452 | A2 | Q402 | *B2 |
| C129 | C1 | C315 | *A1 | C453 | A2 | Q403 | *B2 |
| C130 | C1 | C316 | A1 | C454 | A2 | Q404 | *B2 |
| C131 | C1 | C317 | *A1 | C455 | A2 | Q405 | C2 |
| C132 | C1 | C318 | *A1 | C456 | A2 | Q406 | C2 |
| C133 | C1 | C319 | *A1 | C457 | A2 | | |
| C134 | *C1 | C320 | A1 | C458 | A2 | R102 | *C1 |
| C135 | C1 | C321 | *A1 | C459 | A2 | R103 | *C1 |
| C136 | *C1 | C322 | *A1 | C460 | A2 | R104 | *C1 |
| C137 | C1 | C323 | A1 | C461 | A2 | R105 | *C1 |
| C138 | *C1 | C324 | *A1 | C462 | A2 | R106 | *C1 |
| C139 | *C1 | C325 | A1 | C463 | A2 | R107 | *C1 |
| C140 | C1 | C326 | A1 | C464 | B2 | R108 | *C1 |
| C141 | *C1 | C327 | *A1 | C465 | B2 | R109 | *C1 |
| C142 | C2 | C328 | *A1 | | | R110 | *C1 |
| C143 | C2 | C329 | A1 | CL101 | C1 | R111 | *C1 |
| C144 | C2 | C330 | A1 | CL201 | B1 | R112 | C1 |
| C145 | C2 | C331 | A1 | CL301 | A1 | R113 | *C1 |
| C146 | *C1 | C332 | A2 | CL401 | A2 | R114 | *C1 |
| C147 | *C1 | C333 | A1 | CL402 | A2 | R115 | C1 |
| C148 | C2 | C334 | *A2 | CL403 | A2 | R116 | C1 |
| C149 | C2 | C335 | A1 | CL404 | A2 | R117 | C1 |
| C150 | *C1 | C336 | *A1 | CL405 | A2 | R118 | C1 |
| C151 | *C1 | C337 | A1 | CL406 | A2 | R119 | C1 |
| C152 | *C1 | C338 | *A1 | | | R120 | C1 |
| C153 | *C1 | C339 | *A1 | CN101 | *C1 | R121 | C1 |
| C154 | C2 | C340 | A2 | CN201 | *B1 | R122 | C1 |
| C202 | *B1 | C341 | *A1 | CN301 | *A1 | R123 | C1 |
| C203 | *B1 | C342 | A2 | CN401 | *A2 | R124 | C1 |
| C204 | *B1 | C343 | A2 | CN402 | C2 | R125 | C1 |
| C205 | *B1 | C344 | A2 | | | R126 | C1 |
| C206 | *B1 | C345 | A2 | E401 | C2 | R127 | C1 |
| C207 | B1 | C346 | *A1 | | | R128 | C1 |
| C208 | B1 | C347 | *A2 | FL101 | *C2 | R129 | C1 |
| C209 | B1 | C348 | A2 | FL201 | *B2 | R130 | C1 |
| C210 | B1 | C349 | A2 | FL301 | *A2 | R131 | C1 |
| C211 | B1 | C350 | *A1 | | | R132 | *C1 |
| C212 | B1 | C351 | *A1 | IC101 | *C1 | R133 | *C1 |
| C213 | *B1 | C352 | *A1 | IC102 | *C1 | R134 | C1 |
| C214 | B1 | C353 | *A1 | IC103 | C1 | R135 | *C1 |
| C215 | *B1 | C354 | A2 | IC104 | C2 | R136 | C1 |
| C216 | B1 | C401 | *A2 | IC105 | *C1 | R137 | *C1 |
| C217 | *B1 | C402 | *A2 | IC106 | C2 | R138 | *C1 |
| C218 | *B1 | C403 | A2 | IC201 | *B1 | R139 | *C1 |
| C219 | *B1 | C404 | A2 | IC202 | *B1 | R140 | *C2 |
| C220 | B1 | C405 | A2 | IC203 | B1 | R141 | C2 |
| C221 | *B1 | C406 | A2 | IC204 | B2 | R142 | C2 |
| C222 | *B1 | C407 | A2 | IC205 | *B1 | R143 | C2 |
| C223 | B1 | C408 | A2 | IC206 | B2 | R144 | C2 |
| C224 | *B1 | C409 | A2 | IC301 | *A1 | R145 | C2 |
| C225 | B1 | C410 | A2 | IC302 | *A1 | R146 | C2 |
| C226 | B1 | C411 | A2 | IC303 | A1 | R147 | C2 |
| C227 | *B1 | C412 | A2 | IC304 | A2 | R148 | C2 |
| C228 | *B1 | C413 | A2 | IC305 | *A1 | R149 | C2 |
| C229 | B1 | C414 | A2 | IC306 | A2 | R150 | *C1 |
| C230 | B1 | C415 | A2 | IC401 | A2 | R151 | *C1 |
| C231 | B1 | C416 | A2 | IC402 | A2 | R152 | *C1 |
| C232 | B2 | C417 | A2 | IC403 | A2 | R153 | *C1 |
| C233 | B1 | C418 | A2 | IC404 | A2 | R154 | C2 |
| C234 | *B2 | C419 | A2 | IC405 | A2 | R155 | *C1 |
| C235 | B1 | C420 | B2 | IC406 | A2 | R156 | *C1 |
| C236 | *B1 | C421 | *A2 | IC407 | A2 | R202 | *B1 |
| C237 | B1 | C422 | *A2 | IC408 | A2 | R203 | *B1 |
| C238 | *B1 | C423 | *C2 | IC409 | A2 | R204 | *B1 |
| C239 | *B1 | C424 | *A2 | IC410 | A2 | R205 | *B1 |
| C240 | B2 | C425 | *B2 | IC411 | A2 | R206 | *B1 |




**PA-327** -A SIDE-
SUFFIX: -22




**PA-327** -B SIDE-
SUFFIX: -22

| | | | | | |
|---|---|---|---|---|---|
| R207 | *B1 | R344 | A2 | R480 | *C2 |
| R208 | *B1 | R345 | A2 | R481 | *C2 |
| R209 | *B1 | R346 | A2 | R482 | *C2 |
| R210 | *B1 | R347 | A2 | R483 | *C2 |
| R211 | *B1 | R348 | A2 | R484 | *C2 |
| R212 | B1 | R349 | A2 | R485 | *C2 |
| R213 | *B1 | R350 | *A1 | R486 | *C2 |
| R214 | *B1 | R351 | *A1 | R487 | *C2 |
| R215 | B1 | R352 | *A1 | R488 | *C2 |
| R216 | B1 | R353 | *A1 | R489 | *C2 |
| R217 | B1 | R354 | A2 | R490 | *C2 |
| R218 | B1 | R355 | *A1 | R491 | *C2 |
| R219 | B1 | R356 | *A1 | R492 | *C2 |
| R220 | B1 | R401 | A2 | R493 | *C2 |
| R221 | B1 | R402 | A2 | R494 | *A1 |
| R222 | B1 | R403 | A2 | R495 | *C2 |
| R223 | B1 | R404 | A2 | | |
| R224 | B1 | R405 | A2 | RV101 | C1 |
| R225 | B1 | R406 | A2 | RV201 | B1 |
| R226 | B1 | R407 | A2 | RV301 | A1 |
| R227 | B1 | R408 | A2 | | |
| R228 | B1 | R409 | A2 | *:B SIDE | |
| R229 | B1 | R410 | A2 | | |
| R230 | B1 | R411 | A2 | | |
| R231 | B1 | R412 | A2 | | |
| R232 | *B2 | R413 | A2 | | |
| R233 | *B2 | R414 | A2 | | |
| R234 | B1 | R415 | A2 | | |
| R235 | *B1 | R416 | A2 | | |
| R236 | B1 | R417 | A2 | | |
| R237 | *B2 | R418 | B2 | | |
| R238 | *B2 | R419 | *A2 | | |
| R239 | *B2 | R420 | *A2 | | |
| R240 | *B2 | R421 | *C2 | | |
| R241 | B2 | R422 | *A2 | | |
| R242 | B2 | R423 | *B2 | | |
| R243 | B2 | R424 | *C2 | | |
| R244 | B2 | R425 | *C2 | | |
| R245 | B2 | R426 | *C2 | | |
| R246 | B2 | R427 | *C2 | | |
| R247 | B2 | R428 | *C2 | | |
| R248 | B2 | R429 | *C2 | | |
| R249 | B2 | R430 | *A2 | | |
| R250 | *B1 | R431 | *B2 | | |
| R251 | *B1 | R432 | *C2 | | |
| R252 | *B1 | R433 | C2 | | |
| R253 | *B1 | R434 | C2 | | |
| R254 | B2 | R435 | C2 | | |
| R255 | *B1 | R436 | C2 | | |
| R256 | *B1 | R437 | C2 | | |
| R302 | *A1 | R438 | C2 | | |
| R303 | *A1 | R439 | *C2 | | |
| R304 | *A1 | R440 | *C2 | | |
| R305 | *A1 | R441 | *B2 | | |
| R306 | *A1 | R442 | *B2 | | |
| R307 | *A1 | R443 | *B2 | | |
| R308 | *A1 | R444 | *B2 | | |
| R309 | *A1 | R445 | *B2 | | |
| R310 | *A1 | R446 | *B2 | | |
| R311 | *A1 | R447 | B2 | | |
| R312 | A1 | R448 | B2 | | |
| R313 | *A1 | R449 | B2 | | |
| R314 | *A1 | R450 | B2 | | |
| R315 | A1 | R451 | B2 | | |
| R316 | A1 | R452 | B2 | | |
| R317 | A1 | R453 | B2 | | |
| R318 | A1 | R454 | B2 | | |
| R319 | A1 | R455 | B2 | | |
| R320 | A1 | R456 | *B2 | | |
| R321 | A1 | R457 | *B2 | | |
| R322 | A1 | R458 | *B2 | | |
| R323 | A1 | R459 | *B2 | | |
| R324 | A1 | R460 | *B2 | | |
| R325 | A1 | R461 | *B2 | | |
| R326 | A1 | R462 | B2 | | |
| R327 | A1 | R463 | *C2 | | |
| R328 | A1 | R464 | B2 | | |
| R329 | A1 | R465 | B2 | | |
| R330 | A1 | R466 | B2 | | |
| R331 | A1 | R467 | B2 | | |
| R332 | *A2 | R468 | B2 | | |
| R333 | *A2 | R469 | B2 | | |
| R334 | A1 | R470 | B2 | | |
| R335 | *A1 | R471 | B2 | | |
| R336 | A1 | R472 | C2 | | |
| R337 | *A2 | R473 | C2 | | |
| R338 | *A2 | R474 | C2 | | |
| R339 | *A2 | R475 | C2 | | |
| R340 | *A2 | R476 | C2 | | |
| R341 | A2 | R477 | C2 | | |
| R342 | A2 | R478 | *C2 | | |
| R343 | A2 | R479 | *C2 | | |

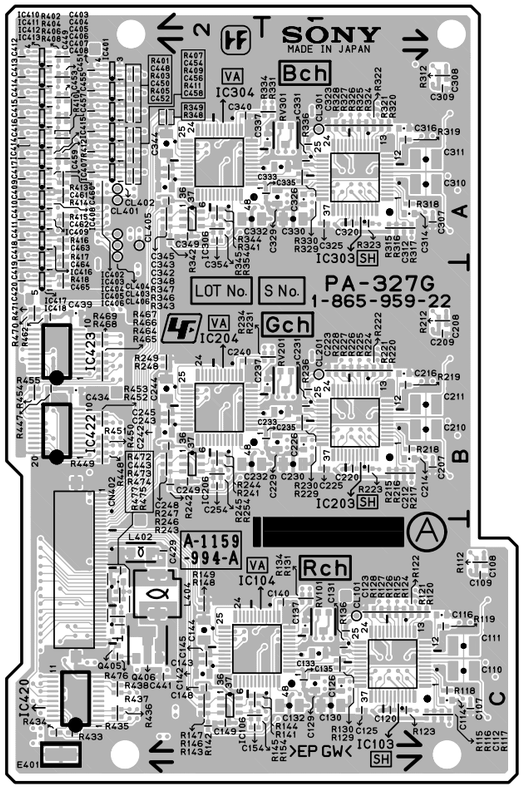SDI-84 (1-865-930-12)

| | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| C101 | B4 | C219 | *B2 | C422 | E1 | C644 | B1 | C935 | E2 | FB214 | *D3 | IC414 | *C4 | Q114 | F4 |
| C102 | *A4 | C220 | *B3 | C423 | *E1 | C645 | *B2 | C936 | E2 | FB215 | *E3 | IC415 | D4 | Q115 | *F4 |
| C103 | *A4 | C221 | *B3 | C424 | E1 | C646 | *B2 | C937 | *E3 | FB216 | *E3 | IC416 | *C4 | Q116 | *F4 |
| C104 | *A4 | C222 | *C3 | C425 | D2 | C701 | *B2 | C938 | *E3 | FB401 | E1 | IC417 | *C4 | Q117 | *F4 |
| C105 | *B4 | C223 | *C3 | C426 | E2 | C702 | *A2 | C939 | *E3 | FB402 | *D1 | IC418 | *C4 | Q118 | *F4 |
| C106 | B4 | C224 | *C2 | C427 | D1 | C703 | *A2 | C940 | *E3 | FB403 | *E1 | IC601 | A1 | Q119 | *B4 |
| C107 | B4 | C225 | *C2 | C428 | D1 | C704 | *A2 | | | FB404 | D2 | IC602 | *B1 | Q120 | *E4 |
| C108 | *A4 | C226 | *C2 | C429 | *D1 | C707 | *A2 | CL101 | B4 | FB405 | D1 | IC603 | B1 | Q201 | E4 |
| C109 | *A4 | C227 | *C2 | C430 | *D1 | C708 | A2 | CL102 | A4 | FB406 | *D1 | IC604 | *B1 | Q202 | *E1 |
| C110 | *A4 | C228 | *C2 | C431 | D1 | C710 | A2 | CL103 | F1 | FB407 | *D1 | IC605 | B1 | Q203 | *E1 |
| C111 | A4 | C229 | *B2 | C432 | C1 | C711 | *A2 | CL104 | F1 | FB408 | *D1 | IC606 | *A1 | Q204 | *F1 |
| C112 | *B4 | C230 | *B3 | C433 | C1 | C712 | *A2 | CL105 | F1 | FB409 | C1 | IC607 | *B2 | Q205 | *F1 |
| C113 | A4 | C231 | *C2 | C436 | *C1 | C713 | *A2 | CL106 | F1 | FB410 | C1 | IC701 | *B2 | Q206 | *F1 |
| C114 | E4 | C232 | *C2 | C437 | *D1 | C714 | A3 | CL107 | F1 | FB411 | *D1 | IC702 | *A2 | Q207 | *F1 |
| C115 | *E4 | C233 | *C2 | C438 | *C4 | C715 | *A2 | CL108 | F1 | FB601 | *A1 | IC703 | *A2 | Q208 | *F2 |
| C116 | *E4 | C234 | *C2 | C439 | *B4 | C716 | A2 | CL202 | C3 | FB602 | *B1 | IC704 | B2 | Q401 | *D1 |
| C117 | *E2 | C235 | *C3 | C441 | *C3 | C717 | A3 | CL203 | E4 | FB603 | *B1 | IC801 | A3 | Q402 | *E1 |
| C118 | *E2 | C236 | *C2 | C443 | *B3 | C718 | *B2 | CL204 | E4 | FB604 | *B1 | IC802 | A4 | Q403 | *E2 |
| C119 | *E2 | C237 | *C2 | C444 | *B4 | C719 | *A2 | CL401 | D2 | FB605 | B1 | IC851 | *A3 | Q404 | *E1 |
| C120 | *E3 | C238 | *C3 | C445 | *B3 | C721 | *B3 | CL402 | D1 | FB606 | *B1 | IC852 | A2 | Q405 | *E1 |
| C121 | *E2 | C239 | *C3 | C446 | *B3 | C723 | *A2 | CL403 | D2 | FB607 | *B2 | IC901 | D2 | Q406 | *D1 |
| C122 | *E2 | C240 | *C3 | C447 | *B3 | C724 | *A3 | CL404 | D1 | FB608 | A2 | IC902 | E2 | Q407 | *E1 |
| C123 | *E3 | C241 | *D4 | C448 | *A3 | C725 | *B2 | CL405 | D1 | FB609 | *B2 | IC903 | E2 | Q408 | *E1 |
| C124 | *E2 | C242 | D4 | C449 | *A4 | C726 | *B2 | CL407 | D1 | FB610 | *A2 | IC904 | *C2 | Q409 | *E1 |
| C125 | E4 | C243 | *D3 | C450 | *B4 | C727 | *B3 | CL408 | D1 | FB611 | *B2 | IC905 | *E2 | Q410 | *E1 |
| C126 | *F3 | C244 | *C3 | C451 | *B4 | C728 | *B2 | CL409 | D1 | FB612 | *B1 | IC906 | *E2 | Q411 | *E1 |
| C127 | *F2 | C245 | C3 | C452 | *B3 | C801 | A3 | CL601 | B2 | FB613 | B1 | IC907 | *E2 | Q412 | *E1 |
| C128 | *F2 | C246 | C3 | C453 | *B3 | C802 | A3 | CL603 | A1 | FB901 | *D2 | | | Q601 | A1 |
| C129 | *F2 | C247 | C3 | C454 | *B3 | C803 | *A4 | CL604 | B2 | FB902 | C2 | JC101 | *D4 | Q602 | *A1 |
| C130 | *F2 | C248 | C3 | C455 | *B3 | C804 | A4 | CL605 | B2 | FB903 | C2 | JC102 | *F3 | Q603 | *B1 |
| C131 | *F2 | C249 | C3 | C456 | *B3 | C805 | A3 | CL606 | A2 | FB904 | *D3 | JC103 | *F3 | Q604 | *B1 |
| C132 | *E3 | C250 | *D3 | C457 | *B4 | C806 | A3 | CL607 | B2 | FB905 | *D3 | | | Q605 | *B1 |
| C133 | *F2 | C251 | *D3 | C458 | *B4 | C807 | A3 | CL608 | A1 | FB906 | *D2 | L101 | B4 | Q606 | *B1 |
| C134 | *F3 | C252 | *D3 | C459 | *B3 | C808 | A3 | CL609 | A2 | FB907 | *D2 | L102 | *E4 | Q607 | *A1 |
| C135 | *F2 | C253 | D3 | C460 | A3 | C809 | A3 | CL610 | A2 | FB908 | *D2 | L103 | *E4 | Q608 | *A1 |
| C136 | E4 | C254 | *E3 | C461 | *A3 | C810 | *A4 | CL701 | B2 | FB909 | *E2 | L104 | *E4 | Q609 | *A1 |
| C137 | *F3 | C255 | *D3 | C462 | *B3 | C811 | *A4 | CL702 | B2 | FB910 | *E2 | L105 | *E4 | Q610 | *B1 |
| C138 | *F3 | C256 | *E3 | C463 | *B3 | C812 | *A4 | CL703 | B2 | FB911 | E3 | L106 | E4 | Q611 | *B1 |
| C141 | *F3 | C257 | E3 | C464 | *B3 | C813 | A4 | CL704 | B2 | FB912 | *E2 | L107 | F4 | Q612 | *B1 |
| C142 | *F4 | C258 | E3 | C465 | *B3 | C814 | *A4 | CL901 | C2 | FB913 | *E2 | L108 | F4 | Q613 | *B1 |
| C143 | *F4 | C259 | E4 | C466 | *B4 | C815 | *A4 | | | FB914 | *D2 | L201 | *B2 | Q617 | B1 |
| C144 | *F4 | C260 | E3 | C467 | C4 | C816 | A4 | CN101 | *D4 | FB915 | *E2 | L202 | *C3 | Q901 | E3 |
| C145 | *F4 | C261 | E4 | C468 | C4 | C851 | *A3 | CN102 | E4 | FB916 | *E2 | L203 | *E3 | Q902 | E2 |
| C146 | *F4 | C262 | E3 | C469 | D4 | C852 | *A3 | CN201 | E3 | | | L204 | E3 | Q903 | E2 |
| C147 | *F4 | C263 | E4 | C470 | *C4 | C853 | *A3 | CN202 | B1 | FL801 | A4 | L205 | E3 | Q904 | *E2 |
| C148 | *F4 | C264 | E4 | C471 | *C4 | C854 | *A3 | CN601 | A1 | FL851 | A2 | L206 | *E1 | Q905 | E3 |
| C149 | *F3 | C265 | E3 | C472 | C4 | C855 | *A3 | CN851 | A2 | | | L207 | *E1 | Q906 | E3 |
| C150 | *F3 | C266 | E3 | C473 | B4 | C856 | *A3 | CN901 | E2 | IC101 | *A4 | L208 | *F1 | Q907 | *E3 |
| C151 | *E3 | C267 | E3 | C474 | *C4 | C857 | *A3 | | | IC102 | *E2 | L401 | *F1 | Q908 | *E3 |
| C152 | *F3 | C268 | E3 | C475 | *E1 | C858 | *A4 | CP201 | F3 | IC103 | *F2 | L402 | *B3 | Q909 | *E3 |
| C155 | *F3 | C269 | E3 | C601 | A1 | C859 | *A4 | CP401 | F1 | IC104 | *F2 | L403 | *A3 | | |
| C156 | *F4 | C270 | *F3 | C602 | A1 | C860 | A2 | CP901 | F2 | IC105 | *F4 | L404 | *B4 | R101 | *A4 |
| C157 | *F4 | C271 | *E3 | C603 | A1 | C861 | A2 | | | IC106 | *F3 | L601 | A1 | R102 | *A4 |
| C158 | *E4 | C272 | E3 | C604 | *A1 | C862 | A2 | D101 | *E3 | IC107 | *E3 | L602 | A1 | R103 | *A4 |
| C159 | *F4 | C273 | E3 | C605 | *A1 | C863 | *A2 | D102 | *E2 | IC108 | *F3 | L603 | A1 | R104 | *A4 |
| C160 | *F4 | C274 | E3 | C606 | *A1 | C864 | *A2 | D103 | *E3 | IC109 | *F4 | L604 | *A1 | R105 | *A4 |
| C161 | *E4 | C275 | E3 | C607 | A1 | C865 | *A2 | D104 | *E3 | IC110 | F4 | L605 | *A1 | R106 | *A4 |
| C162 | *F4 | C276 | *E2 | C608 | *A1 | C866 | *A2 | D105 | *F2 | IC111 | F4 | L702 | *A3 | R107 | *A4 |
| C163 | *F3 | C277 | *E1 | C609 | *A1 | C901 | *D3 | D106 | *F2 | IC112 | *F4 | L703 | *A2 | R108 | *A4 |
| C164 | *F3 | C278 | *E1 | C610 | B1 | C902 | C3 | D107 | *F2 | IC113 | *F4 | L704 | *A2 | R109 | *A4 |
| C165 | *F3 | C279 | *E2 | C611 | B1 | C903 | *D2 | D108 | *F2 | IC114 | C2 | L705 | *A2 | R110 | *A4 |
| C166 | F4 | C280 | *E1 | C612 | *B1 | C904 | *D2 | D109 | *F2 | IC201 | D4 | L706 | *B2 | R111 | *A4 |
| C167 | *F4 | C281 | *F1 | C613 | *B1 | C905 | *C2 | D110 | *F2 | IC202 | C4 | L707 | *B2 | R112 | *A4 |
| C168 | *F4 | C282 | *F1 | C614 | *B1 | C906 | C2 | D111 | *F4 | IC204 | *C1 | L801 | A4 | R113 | *A4 |
| C169 | F4 | C283 | *F2 | C615 | *B1 | C907 | C2 | D112 | *E4 | IC205 | *C1 | L802 | A3 | R114 | *E2 |
| C170 | *F4 | C284 | *F1 | C616 | *B1 | C908 | C2 | D113 | *E4 | IC206 | *C2 | L803 | *A4 | R115 | *E2 |
| C171 | *F4 | C285 | *F2 | C617 | *B1 | C909 | C2 | D114 | *E3 | IC207 | C2 | L804 | *A4 | R116 | *E2 |
| C172 | *F4 | C286 | *F1 | C618 | *B1 | C910 | C2 | D701 | *A2 | IC208 | D3 | L851 | *A3 | R117 | *E2 |
| C173 | C2 | C287 | *F1 | C619 | B1 | C911 | *D3 | D702 | *A2 | IC209 | E3 | L852 | *A4 | R118 | *E2 |
| C174 | A4 | C288 | *F1 | C620 | B1 | C912 | *D3 | | | IC210 | E3 | L853 | *A2 | R119 | *E2 |
| C175 | *E4 | C289 | *C3 | C621 | *B1 | C913 | *D2 | E1 | C3 | IC211 | *C1 | L854 | *A2 | R120 | *E2 |
| C176 | E4 | C401 | *F1 | C622 | *B1 | C914 | D3 | E2 | *C3 | IC212 | C1 | L901 | *F2 | R121 | *E3 |
| C177 | E4 | C402 | E1 | C623 | *B1 | C915 | *E2 | | | IC214 | *E1 | L902 | E2 | R122 | *E3 |
| C178 | *E4 | C403 | *E1 | C624 | *B1 | C916 | *D2 | FB101 | *F3 | IC215 | *F1 | L903 | E2 | R123 | *E3 |
| C179 | *E4 | C404 | E1 | C625 | *B1 | C917 | *E2 | FB102 | *F3 | IC216 | *F1 | | | R124 | *E3 |
| C180 | *E4 | C405 | E1 | C626 | *B1 | C918 | E2 | FB103 | *E3 | IC217 | *C3 | LP1 | A3 | R125 | *E3 |
| C201 | D4 | C406 | E1 | C627 | *B1 | C919 | E2 | FB104 | *E3 | IC218 | D4 | LP2 | A4 | R126 | *E3 |
| C202 | D4 | C407 | E1 | C628 | *B1 | C920 | E3 | FB105 | *E3 | IC219 | E4 | LP3 | B2 | R127 | *E3 |
| C203 | *C1 | C408 | E1 | C629 | *B1 | C921 | E2 | FB106 | *F3 | IC220 | E4 | | | R128 | *E3 |
| C204 | D4 | C409 | E1 | C630 | B1 | C922 | E3 | FB201 | *D3 | IC221 | D4 | Q101 | *B4 | R129 | *E3 |
| C205 | D4 | C410 | E1 | C631 | B1 | C923 | E2 | FB202 | C3 | IC401 | *D1 | Q102 | *A4 | R130 | *F2 |
| C206 | D4 | C411 | E1 | C632 | *B1 | C924 | E3 | FB203 | C3 | IC402 | E1 | Q103 | *B4 | R131 | *F2 |
| C208 | C4 | C412 | *E1 | C633 | B1 | C925 | E3 | FB204 | *D4 | IC403 | D1 | Q104 | *A4 | R132 | *F2 |
| C209 | *C2 | C413 | E1 | C634 | A2 | C926 | E2 | FB205 | *D4 | IC404 | *D1 | Q105 | *E3 | R133 | *F2 |
| C210 | *C1 | C414 | *D1 | C635 | *B2 | C927 | E2 | FB206 | *D3 | IC405 | *C1 | Q106 | *E2 | R134 | *F2 |
| C211 | *C1 | C415 | *D2 | C636 | *B2 | C928 | E2 | FB207 | *D3 | IC407 | *C3 | Q107 | *E3 | R135 | *F2 |
| C212 | *C1 | C416 | *D2 | C637 | *A2 | C929 | E2 | FB208 | *D3 | IC408 | B3 | Q108 | *E3 | R136 | *F2 |
| C213 | *C1 | C417 | E1 | C638 | *B2 | C930 | E2 | FB209 | *E3 | IC409 | *B4 | Q109 | *E3 | R137 | *F2 |
| C214 | *C1 | C418 | E1 | C639 | *A1 | C931 | *F2 | FB210 | *E3 | IC410 | C4 | Q110 | *E3 | R138 | *F3 |
| C215 | *C1 | C419 | *D2 | C640 | *B1 | C932 | *E2 | FB211 | E4 | IC411 | C4 | Q111 | *F3 | R139 | *F3 |
| C216 | *C1 | C420 | *D1 | C641 | *A1 | C933 | E2 | FB212 | *E3 | IC412 | *C4 | Q112 | *F2 | R141 | *F4 |
| C218 | *C2 | C421 | *D1 | C642 | *B1 | C934 | E2 | FB213 | *E3 | IC413 | C4 | Q113 | F4 | R142 | *F4 |

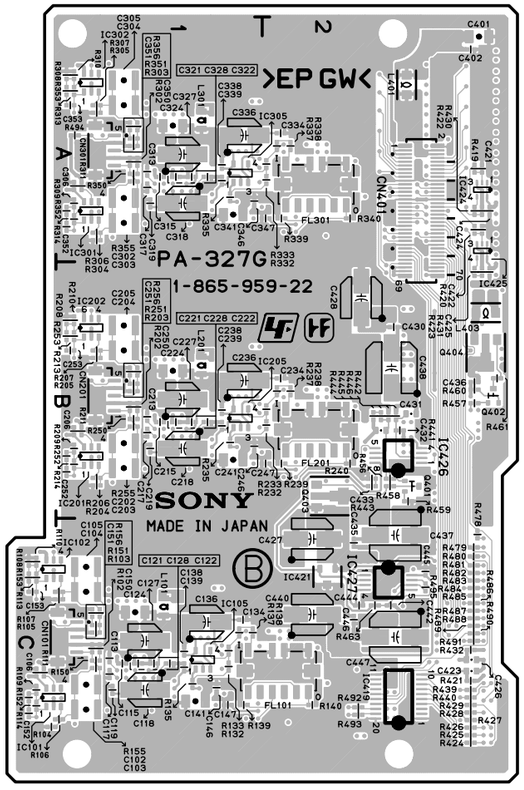


**SDI-84** -A SIDE-
SUFFIX: -12




**SDI-84** -B SIDE-
SUFFIX: -12

| | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| R143 | *F4 | R247 | *B2 | R339 | *F2 | R480 | *B3 | R675 | *B1 | R862 | *A3 | RB223 | E1 | | |
| R144 | *F4 | R248 | *C2 | R340 | *F1 | R481 | *B3 | R676 | *B1 | R863 | A2 | RB224 | *D3 | | |
| R145 | *F4 | R249 | *C2 | R341 | *F2 | R482 | *B3 | R677 | *A1 | R864 | A2 | RB225 | *D3 | | |
| R146 | *F4 | R250 | *C2 | R342 | *F1 | R483 | *B3 | R683 | B1 | R865 | A2 | RB226 | *D3 | | |
| R147 | *F4 | R251 | *C2 | R343 | *F1 | R484 | *B3 | R684 | B1 | R866 | A2 | RB227 | *D3 | | |
| R148 | *F4 | R252 | *C3 | R344 | *F1 | R485 | *B3 | R685 | B1 | R867 | A2 | RB228 | *D3 | | |
| R149 | *F3 | R253 | *C3 | R345 | *F2 | R486 | *B3 | R686 | *B2 | R868 | A2 | RB401 | *D1 | | |
| R150 | *F3 | R254 | *C2 | R346 | *F2 | R487 | *B3 | R687 | *B2 | R869 | A2 | RB402 | *D1 | | |
| R151 | *F3 | R255 | *C2 | R347 | *F1 | R488 | *B3 | R701 | *B2 | R870 | A2 | RB403 | *D1 | | |
| R152 | *F3 | R256 | *C2 | R348 | *F1 | R489 | *A3 | R702 | *B2 | R871 | A2 | RB404 | *D1 | | |
| R153 | *F3 | R257 | *C2 | R349 | C3 | R490 | *B4 | R703 | *B2 | R872 | A2 | RB405 | *D1 | | |
| R154 | *E3 | R258 | *C2 | R350 | E4 | R491 | *C4 | R704 | *A2 | R873 | A2 | RB406 | *C3 | | |
| R155 | *F4 | R259 | *C2 | R351 | D4 | R494 | *C4 | R705 | *A2 | R874 | A2 | RB407 | *C3 | | |
| R156 | *F4 | R260 | *C2 | R352 | *B2 | R495 | *B4 | R706 | *A2 | R875 | A2 | RB413 | C1 | | |
| R157 | *F4 | R261 | *C2 | R353 | *B2 | R496 | *C4 | R707 | *A2 | R876 | A2 | RB414 | C4 | | |
| R158 | *F4 | R262 | *C2 | R354 | *B2 | R497 | *C4 | R708 | *A2 | R901 | *D2 | RB415 | C4 | | |
| R159 | *F3 | R263 | *C2 | R355 | *B2 | R498 | *C4 | R709 | *A2 | R902 | *D3 | RB416 | C4 | | |
| R160 | *F3 | R264 | *C2 | R356 | *B2 | R499 | *C4 | R710 | *A2 | R903 | *D3 | RB417 | C4 | | |
| R161 | *F3 | R265 | *C2 | R357 | *B2 | R500 | E1 | R711 | *A2 | R904 | *D2 | RB418 | *C4 | | |
| R162 | *F3 | R266 | *C2 | R358 | *B2 | R501 | E1 | R713 | *A2 | R905 | *C2 | RB419 | C4 | | |
| R163 | *F3 | R267 | *C2 | R359 | *B2 | R502 | *C1 | R714 | *A2 | R906 | *C2 | RB420 | C4 | | |
| R164 | *F4 | R268 | *C2 | R401 | *D1 | R601 | A1 | R715 | A2 | R907 | *C2 | RB421 | *C4 | | |
| R165 | *F4 | R269 | *C2 | R402 | *E1 | R602 | A1 | R716 | A2 | R908 | *C2 | RB422 | *C4 | | |
| R166 | *F4 | R270 | *C3 | R403 | E1 | R603 | A1 | R717 | *A2 | R909 | *C2 | RB423 | *C4 | | |
| R167 | *F4 | R271 | *C2 | R404 | *D1 | R604 | A1 | R718 | *A2 | R910 | C2 | RB424 | *C4 | | |
| R168 | *F4 | R272 | *C2 | R405 | E1 | R605 | A1 | R720 | *A3 | R911 | *D2 | RB425 | *C4 | | |
| R169 | F4 | R273 | *C2 | R406 | *E1 | R606 | A1 | R721 | *B2 | R912 | C2 | RB601 | *B2 | | |
| R170 | F4 | R274 | *D3 | R407 | *E1 | R607 | A1 | R722 | *A3 | R913 | D3 | RB602 | *B2 | | |
| R171 | F4 | R275 | *D3 | R408 | *E1 | R608 | A1 | R723 | *B2 | R914 | D3 | RB603 | *B2 | | |
| R172 | *F4 | R276 | *D3 | R409 | *E1 | R609 | *A1 | R724 | *B3 | R915 | D3 | RB604 | *A2 | | |
| R173 | *F4 | R277 | *D3 | R410 | E1 | R610 | *A1 | R725 | *B3 | R916 | E2 | RB701 | *B2 | | |
| R174 | *F4 | R278 | *C3 | R411 | E1 | R611 | *A1 | R726 | *A3 | R917 | E2 | RB702 | *B2 | | |
| R175 | *F4 | R279 | *C3 | R412 | *E1 | R612 | *A1 | R727 | *B2 | R918 | E2 | RB801 | A3 | | |
| R176 | *F4 | R280 | *C3 | R413 | *E1 | R613 | *A1 | R728 | *B2 | R919 | E2 | RB802 | A3 | | |
| R177 | *F4 | R281 | *C3 | R414 | E1 | R614 | *A1 | R729 | *B2 | R920 | E2 | RB851 | *A3 | | |
| R178 | *F4 | R282 | *D3 | R415 | *E1 | R615 | B1 | R730 | *B2 | R921 | *E2 | RB852 | *A3 | | |
| R179 | *F4 | R283 | *C3 | R416 | *E1 | R616 | *A1 | R731 | *B2 | R922 | *E2 | RB901 | *D2 | | |
| R180 | *F4 | R284 | C3 | R417 | *E1 | R617 | *B1 | R732 | *B2 | R923 | *E2 | RB902 | *D2 | | |
| R181 | *F4 | R285 | D4 | R418 | E1 | R618 | B1 | R733 | *B2 | R924 | *E2 | RB903 | *D2 | | |
| R182 | *F4 | R286 | D4 | R419 | *E1 | R619 | *B1 | R734 | *B2 | R925 | E2 | RB904 | *D2 | | |
| R183 | *F4 | R287 | D4 | R420 | *E1 | R620 | B1 | R735 | *B2 | R926 | E2 | RB905 | *D2 | | |
| R184 | *F4 | R288 | E3 | R421 | E1 | R621 | *B1 | R736 | *B2 | R927 | *E2 | | | | |
| R185 | *F4 | R289 | E3 | R422 | E1 | R622 | B1 | R737 | *B2 | R928 | E3 | S201 | E1 | | |
| R186 | *F4 | R290 | E3 | R423 | *E1 | R623 | *B1 | R738 | *B2 | R929 | *E2 | S202 | F1 | | |
| R187 | *D4 | R291 | E3 | R424 | *E1 | R624 | *B1 | R739 | *B2 | R930 | E2 | | | | |
| R188 | *D4 | R292 | E3 | R425 | *E1 | R625 | B1 | R740 | *B2 | R931 | *E2 | TP203 | D4 | | |
| R189 | *D4 | R293 | *E3 | R426 | E1 | R626 | B1 | R741 | B2 | R932 | E3 | TP401 | C1 | | |
| R190 | *E4 | R294 | *E3 | R427 | *D2 | R627 | *B1 | R742 | B2 | R933 | E2 | TP603 | B2 | | |
| R191 | *E4 | R295 | *E3 | R428 | E1 | R628 | B1 | R743 | B2 | R934 | E2 | TP701 | A2 | | |
| R192 | *E4 | R296 | *E3 | R429 | *D2 | R629 | *B1 | R744 | B2 | R935 | E2 | TP702 | B2 | | |
| R193 | *E4 | R297 | E3 | R430 | *D2 | R630 | B1 | R745 | B2 | R936 | E3 | TP801 | A4 | | |
| R194 | B4 | R298 | E3 | R431 | *D2 | R631 | *B1 | R746 | B2 | R937 | E3 | TP851 | A2 | | |
| R195 | *E2 | R299 | *E3 | R432 | *D1 | R633 | *B1 | R747 | B3 | R938 | E2 | | | | |
| R201 | *C1 | R300 | E4 | R433 | E1 | R634 | *B1 | R748 | B3 | R939 | E2 | X201 | *D3 | | |
| R202 | *C1 | R301 | *E3 | R434 | E1 | R635 | *B1 | R749 | *B2 | R940 | *E2 | X202 | *F1 | | |
| R203 | *C1 | R302 | E3 | R435 | E1 | R636 | *B1 | R801 | A3 | R941 | *E2 | X203 | *F2 | | |
| R204 | *C1 | R303 | *E3 | R436 | E1 | R637 | *A1 | R802 | A3 | R942 | E2 | X401 | D2 | | |
| R205 | E4 | R304 | E4 | R437 | *D1 | R638 | *B1 | R803 | A3 | R943 | E2 | X601 | B1 | | |
| R206 | *C1 | R305 | E3 | R438 | *D1 | R639 | *A1 | R804 | A3 | R944 | E2 | X901 | *D2 | | |
| R207 | D4 | R306 | E3 | R439 | *D1 | R640 | *B1 | R805 | A3 | R945 | E2 | | | | |
| R208 | *C1 | R307 | E3 | R440 | *D1 | R641 | *B1 | R806 | A3 | R946 | E2 | *:B SIDE | | | |
| R209 | C4 | R308 | E4 | R441 | *D1 | R642 | *B1 | R807 | A3 | R947 | E2 | | | | |
| R210 | C4 | R309 | E4 | R442 | *D1 | R643 | *B1 | R808 | A3 | R948 | E2 | | | | |
| R211 | C3 | R310 | E3 | R443 | *D1 | R644 | *B1 | R809 | A3 | R949 | E2 | | | | |
| R212 | D4 | R311 | E3 | R444 | *D1 | R645 | *B1 | R810 | A3 | R950 | *E2 | | | | |
| R213 | *C3 | R312 | *E3 | R445 | *D1 | R646 | *B1 | R811 | A4 | R951 | *E2 | | | | |
| R214 | *C3 | R313 | *E3 | R446 | *D1 | R647 | *B1 | R812 | A4 | R952 | E2 | | | | |
| R215 | D4 | R314 | E3 | R447 | *D1 | R648 | B1 | R813 | A4 | R953 | *E2 | | | | |
| R216 | D4 | R315 | E3 | R449 | *D1 | R649 | A1 | R814 | A4 | R954 | E3 | | | | |
| R217 | E4 | R316 | E3 | R451 | *D1 | R650 | A1 | R815 | A4 | R955 | *E3 | | | | |
| R218 | E4 | R317 | E3 | R452 | *C1 | R651 | A1 | R816 | *A4 | R956 | *E3 | | | | |
| R220 | *B2 | R318 | E3 | R453 | *C1 | R652 | *B2 | R817 | A4 | R957 | *E3 | | | | |
| R221 | *C2 | R319 | E3 | R456 | *B3 | R653 | A1 | R818 | A4 | R958 | E2 | | | | |
| R222 | *B2 | R320 | E3 | R457 | *B3 | R654 | *B2 | R819 | *A4 | R959 | E2 | | | | |
| R224 | C4 | R321 | E3 | R458 | *C3 | R655 | *B2 | R820 | *A4 | | | | | | |
| R225 | C4 | R322 | *E2 | R459 | *C3 | R656 | A1 | R821 | *A4 | RB201 | *D4 | | | | |
| R226 | D4 | R323 | *F1 | R463 | *C3 | R657 | *B2 | R822 | *A4 | RB202 | D4 | | | | |
| R227 | *C2 | R324 | *F1 | R464 | *C3 | R658 | A1 | R823 | *A4 | RB203 | D4 | | | | |
| R228 | *C2 | R325 | *F1 | R466 | *B3 | R659 | *B2 | R824 | A4 | RB204 | *D4 | | | | |
| R229 | *C1 | R326 | *C2 | R467 | *B3 | R660 | *B2 | R825 | A4 | RB205 | *D4 | | | | |
| R235 | *C2 | R327 | *C2 | R468 | *A3 | R661 | A1 | R826 | A4 | RB206 | E4 | | | | |
| R236 | *C2 | R328 | *E2 | R469 | *A3 | R663 | A2 | R851 | *A4 | RB207 | E4 | | | | |
| R237 | *C2 | R329 | *E2 | R470 | *B3 | R665 | A2 | R852 | *A3 | RB208 | *E4 | | | | |
| R238 | *C2 | R330 | *E1 | R471 | *A3 | R666 | B1 | R853 | *A3 | RB209 | *E4 | | | | |
| R239 | *B2 | R331 | *E1 | R472 | *A3 | R667 | B2 | R854 | *A3 | RB210 | *E4 | | | | |
| R240 | *C2 | R332 | *E1 | R473 | *A3 | R668 | B2 | R855 | *A3 | RB211 | C4 | | | | |
| R241 | *C2 | R333 | *E1 | R474 | *A3 | R669 | B2 | R856 | *A4 | RB212 | C4 | | | | |
| R242 | *C2 | R334 | *F2 | R475 | *A3 | R670 | A2 | R857 | *A4 | RB213 | D4 | | | | |
| R243 | *C2 | R335 | *F2 | R476 | *A3 | R671 | A2 | R858 | *A4 | RB214 | D4 | | | | |
| R244 | *C2 | R336 | *F2 | R477 | *A3 | R672 | *A1 | R859 | *A4 | RB215 | D4 | | | | |
| R245 | *C2 | R337 | *F2 | R478 | *B3 | R673 | *A1 | R860 | *A4 | RB216 | *D4 | | | | |
| R246 | *B2 | R338 | *F2 | R479 | *B3 | R674 | *B1 | R861 | *A3 | RB222 | E1 | | | | |

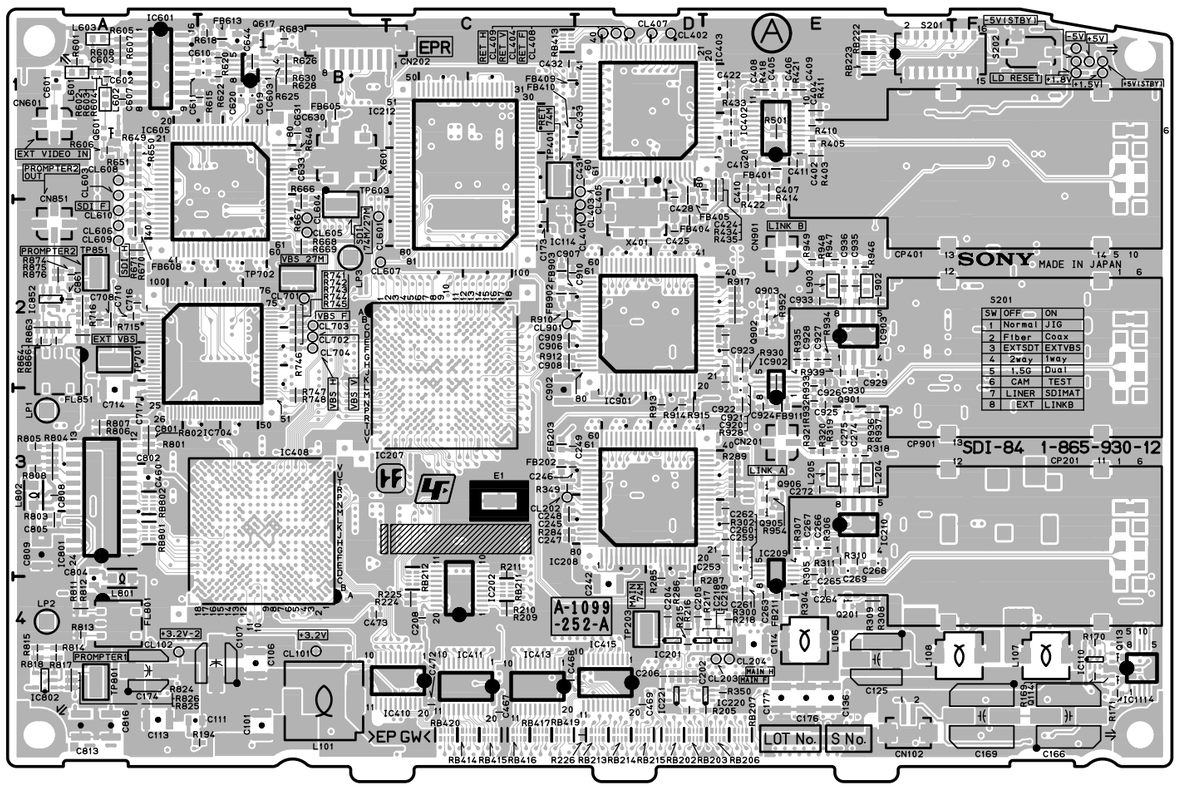SDI-84 (1-865-930-13)

| | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| C101 | B4 | C220 | *B3 | C423 | *E1 | C645 | *B2 | C936 | E2 | FB215 | *E3 | IC416 | *C4 | Q118 | *F4 |
| C102 | *A4 | C221 | *B3 | C424 | E1 | C646 | *B2 | C937 | *E3 | FB216 | *E3 | IC417 | *C4 | Q119 | *B4 |
| C103 | *A4 | C222 | *C3 | C425 | D2 | C701 | *B2 | C938 | *E3 | FB401 | E1 | IC418 | *C4 | Q120 | *E4 |
| C104 | *A4 | C223 | *C3 | C426 | E2 | C702 | *A2 | C939 | *E3 | FB402 | *D1 | IC601 | A1 | Q201 | E4 |
| C105 | *B4 | C224 | *C2 | C427 | D1 | C703 | *A2 | C940 | *E3 | FB403 | *E1 | IC602 | *B1 | Q202 | *E1 |
| C106 | B4 | C225 | *C2 | C428 | D1 | C704 | *A2 | | | FB404 | D2 | IC603 | B1 | Q203 | *E1 |
| C107 | B4 | C226 | *C2 | C429 | *D1 | C707 | *A2 | CL101 | B4 | FB405 | D1 | IC604 | *B1 | Q204 | *F1 |
| C108 | *A4 | C227 | *C2 | C430 | *D1 | C708 | A2 | CL102 | A4 | FB406 | *D1 | IC605 | B1 | Q205 | *F1 |
| C109 | *A4 | C228 | *C2 | C431 | D1 | C710 | A2 | CL103 | F1 | FB407 | *D1 | IC606 | *A1 | Q206 | *F1 |
| C110 | *A4 | C229 | *B2 | C432 | C1 | C711 | *A2 | CL104 | F1 | FB408 | *D1 | IC607 | *B2 | Q207 | *F1 |
| C111 | B4 | C230 | *B3 | C433 | C1 | C712 | *A2 | CL105 | F1 | FB409 | C1 | IC701 | *B2 | Q208 | *F2 |
| C112 | *B4 | C231 | *C2 | C436 | *C1 | C713 | *A2 | CL106 | F1 | FB410 | C1 | IC702 | *A2 | Q401 | *D1 |
| C113 | A4 | C232 | *C2 | C437 | *D1 | C714 | A3 | CL107 | F1 | FB411 | *D1 | IC703 | *A2 | Q402 | *E1 |
| C114 | E4 | C233 | *C2 | C438 | *C4 | C715 | *A2 | CL108 | F1 | FB601 | *A1 | IC704 | B2 | Q403 | *E2 |
| C115 | *E4 | C234 | *C2 | C439 | *B4 | C716 | A2 | CL202 | C3 | FB602 | *B1 | IC801 | A3 | Q404 | *E1 |
| C116 | *E4 | C235 | *C3 | C441 | *C3 | C717 | A3 | CL203 | E4 | FB603 | *B1 | IC802 | A4 | Q405 | *E1 |
| C117 | *E2 | C236 | *C2 | C443 | *B3 | C718 | *A2 | CL204 | E4 | FB604 | *B1 | IC851 | *A3 | Q406 | *D1 |
| C118 | *E2 | C237 | *C2 | C444 | *B4 | C719 | *A2 | CL401 | D2 | FB605 | B1 | IC852 | A2 | Q407 | *E1 |
| C119 | *E2 | C238 | *C3 | C445 | *B3 | C721 | *B3 | CL402 | D1 | FB606 | *B1 | IC901 | D2 | Q408 | *E1 |
| C120 | *E3 | C239 | *C3 | C446 | *B3 | C723 | *A2 | CL403 | D2 | FB607 | *B2 | IC902 | E2 | Q409 | *E1 |
| C121 | *E2 | C240 | *C3 | C447 | *B3 | C724 | *A3 | CL404 | D1 | FB608 | A2 | IC903 | E2 | Q410 | *E1 |
| C122 | *E2 | C241 | *D4 | C448 | *A3 | C725 | *B2 | CL405 | D1 | FB609 | *B2 | IC904 | *C2 | Q411 | *E1 |
| C123 | *E3 | C242 | D4 | C449 | *A4 | C726 | *B2 | CL407 | D1 | FB610 | *A2 | IC905 | *E2 | Q412 | *E1 |
| C124 | *E2 | C243 | *D3 | C450 | *B4 | C727 | *B3 | CL408 | D1 | FB611 | *B2 | IC906 | *E2 | Q601 | A1 |
| C125 | E4 | C244 | *C3 | C451 | *B4 | C728 | *B2 | CL409 | D1 | FB612 | *B1 | IC907 | *E2 | Q602 | *A1 |
| C126 | *F3 | C245 | C3 | C452 | *B3 | C801 | A3 | CL601 | B2 | FB613 | B1 | | | Q603 | *B1 |
| C127 | *F2 | C246 | C3 | C453 | *B3 | C802 | A3 | CL603 | A1 | FB901 | *D2 | JC101 | *D4 | Q604 | *B1 |
| C128 | *F2 | C247 | C3 | C454 | *B3 | C803 | *A4 | CL604 | B2 | FB902 | C2 | | | Q605 | *B1 |
| C129 | *F2 | C248 | C3 | C455 | *B3 | C804 | A4 | CL605 | B2 | FB903 | C2 | L101 | B4 | Q606 | *B1 |
| C130 | *F2 | C249 | C3 | C456 | *B3 | C805 | A3 | CL606 | A2 | FB904 | *D3 | L102 | *E4 | Q607 | *A1 |
| C131 | *F2 | C250 | *D3 | C457 | *B4 | C806 | A3 | CL607 | B2 | FB905 | *D3 | L103 | *E4 | Q608 | *A1 |
| C132 | *E3 | C251 | *D3 | C458 | *B4 | C807 | A3 | CL608 | A1 | FB906 | *D2 | L104 | *E4 | Q609 | *A1 |
| C133 | *F2 | C252 | *D3 | C459 | *B3 | C808 | A3 | CL609 | A2 | FB907 | *D2 | L105 | *E4 | Q610 | *B1 |
| C134 | *F3 | C253 | D3 | C460 | A3 | C809 | A3 | CL610 | A2 | FB908 | *D2 | L106 | E4 | Q611 | *B1 |
| C135 | *F2 | C254 | *E3 | C461 | *A3 | C810 | *A4 | CL701 | B2 | FB909 | *E2 | L107 | F4 | Q612 | *B1 |
| C136 | E4 | C255 | *D3 | C462 | *B3 | C811 | *A4 | CL702 | B2 | FB910 | *E2 | L108 | F4 | Q613 | *B1 |
| C137 | *F3 | C256 | *E3 | C463 | *B3 | C812 | *A4 | CL703 | B2 | FB911 | E3 | L201 | *B2 | Q617 | B1 |
| C138 | *F3 | C257 | E3 | C464 | *B3 | C813 | A4 | CL704 | B2 | FB912 | *E2 | L202 | *C3 | Q901 | E3 |
| C141 | *F3 | C258 | E3 | C465 | *B3 | C814 | *A4 | CL901 | C2 | FB913 | *E2 | L203 | *E3 | Q902 | E2 |
| C142 | *F4 | C259 | E4 | C466 | *B4 | C815 | *A4 | | | FB914 | *D2 | L204 | E3 | Q903 | E2 |
| C143 | *F4 | C260 | E3 | C467 | C4 | C816 | A4 | CN101 | *D4 | FB915 | *E2 | L205 | E3 | Q904 | *E2 |
| C144 | *F4 | C261 | E4 | C468 | C4 | C851 | *A3 | CN102 | E4 | FB916 | *E2 | L206 | *E1 | Q905 | E3 |
| C145 | *F4 | C262 | E3 | C469 | D4 | C852 | *A3 | CN201 | E3 | | | L207 | *E1 | Q906 | E3 |
| C146 | *F4 | C263 | E4 | C470 | *C4 | C853 | *A3 | CN202 | B1 | FL801 | A4 | L208 | *F1 | Q907 | *E3 |
| C147 | *F4 | C264 | E4 | C471 | *C4 | C854 | *A3 | CN601 | A1 | FL851 | A2 | L401 | *F1 | Q908 | *E3 |
| C148 | *F4 | C265 | E3 | C472 | C4 | C855 | *A3 | CN851 | A2 | | | L402 | *B3 | Q909 | *E3 |
| C149 | *F3 | C266 | E3 | C473 | B4 | C856 | *A3 | CN901 | E2 | IC101 | *A4 | L403 | *A3 | | |
| C150 | *F3 | C267 | E3 | C474 | *C4 | C857 | *A3 | | | IC102 | *E2 | L404 | *B4 | R101 | *A4 |
| C151 | *E3 | C268 | E3 | C475 | *E2 | C858 | *A4 | CP201 | F3 | IC103 | *F2 | L601 | A1 | R102 | *A4 |
| C152 | *F3 | C269 | E3 | C476 | *E1 | C859 | *A4 | CP401 | F1 | IC104 | *F2 | L602 | A1 | R103 | *A4 |
| C155 | *F3 | C270 | *F3 | C602 | A1 | C860 | A2 | CP901 | F2 | IC105 | *F4 | L603 | A1 | R104 | *A4 |
| C156 | *F4 | C271 | *E3 | C603 | A1 | C861 | A2 | | | IC106 | *F3 | L604 | *A1 | R105 | *A4 |
| C157 | *F4 | C272 | E3 | C604 | *A1 | C862 | A2 | D101 | *E3 | IC107 | *E3 | L605 | *A1 | R106 | *A4 |
| C158 | *E4 | C273 | E3 | C605 | *A1 | C863 | *A2 | D102 | *E2 | IC109 | *F4 | L702 | *A3 | R107 | *A4 |
| C159 | *F4 | C274 | E3 | C606 | *A1 | C864 | *A2 | D103 | *E3 | IC110 | F4 | L703 | *A2 | R108 | *A4 |
| C160 | *F4 | C275 | E3 | C607 | A1 | C865 | *A2 | D104 | *E3 | IC111 | F4 | L704 | *A2 | R109 | *A4 |
| C161 | *E4 | C276 | *E2 | C608 | *A1 | C866 | *A2 | D105 | *F2 | IC112 | *F4 | L705 | *A2 | R110 | *A4 |
| C162 | *F4 | C277 | *E1 | C609 | *A1 | C901 | *D3 | D106 | *F2 | IC113 | *F4 | L706 | *B2 | R111 | *A4 |
| C164 | *F3 | C278 | *E1 | C610 | B1 | C902 | C3 | D107 | *F2 | IC114 | C2 | L707 | *B2 | R112 | *A4 |
| C165 | *F3 | C279 | *E2 | C611 | B1 | C903 | *D2 | D108 | *F2 | IC201 | D4 | L801 | A4 | R113 | *A4 |
| C166 | F4 | C280 | *E1 | C612 | *B1 | C904 | *D2 | D109 | *F2 | IC202 | C4 | L802 | A3 | R114 | *E2 |
| C167 | *F4 | C281 | *F1 | C613 | *B1 | C905 | *C2 | D110 | *F2 | IC204 | *C1 | L803 | *A4 | R115 | *E2 |
| C168 | *F4 | C282 | *F1 | C614 | *B1 | C906 | C2 | D111 | *F4 | IC205 | *C1 | L804 | *A4 | R116 | *E2 |
| C169 | F4 | C283 | *F2 | C615 | *B1 | C907 | C2 | D112 | *E4 | IC206 | *C2 | L851 | *A3 | R117 | *E2 |
| C170 | *F4 | C284 | *F1 | C616 | *B1 | C908 | C2 | D113 | *E4 | IC207 | C2 | L852 | *A4 | R118 | *E2 |
| C171 | *F4 | C285 | *F2 | C617 | *B1 | C909 | C2 | D114 | *E3 | IC208 | D3 | L853 | *A2 | R119 | *E2 |
| C172 | *F4 | C286 | *F1 | C618 | *B1 | C910 | C2 | D701 | *A2 | IC209 | E3 | L854 | *A2 | R120 | *E2 |
| C173 | C2 | C287 | *F1 | C619 | B1 | C911 | *D3 | D702 | *A2 | IC210 | E3 | L901 | *F2 | R121 | *E3 |
| C174 | A4 | C288 | *F1 | C620 | B1 | C912 | *D3 | | | IC211 | *C1 | L902 | E2 | R122 | *E3 |
| C175 | *E4 | C289 | *C3 | C621 | *B1 | C913 | *D2 | E1 | C3 | IC212 | C1 | L903 | E2 | R123 | *E3 |
| C176 | E4 | C401 | *F1 | C622 | *B1 | C914 | D3 | E2 | *C3 | IC214 | *E1 | | | R124 | *E3 |
| C177 | E4 | C402 | E1 | C623 | *B1 | C915 | *E2 | | | IC215 | *F1 | LP1 | A3 | R125 | *E3 |
| C178 | *E4 | C403 | *E1 | C624 | *B1 | C916 | *D2 | FB101 | *F3 | IC216 | *F1 | LP2 | A4 | R126 | *E3 |
| C179 | *E4 | C404 | E1 | C625 | *B1 | C917 | *E2 | FB102 | *F3 | IC217 | *C3 | LP3 | B2 | R127 | *E3 |
| C180 | *E4 | C405 | E1 | C626 | *B1 | C918 | E2 | FB103 | *E3 | IC218 | E4 | | | R128 | *E3 |
| C201 | D4 | C406 | E1 | C627 | *B1 | C919 | E2 | FB104 | *E3 | IC219 | E4 | Q101 | *B4 | R129 | *E3 |
| C202 | D4 | C407 | E1 | C628 | *B1 | C920 | E3 | FB105 | *E3 | IC220 | E4 | Q102 | *A4 | R130 | *F2 |
| C203 | *C1 | C408 | E1 | C629 | *B1 | C921 | E2 | FB106 | *F3 | IC221 | D4 | Q103 | *B4 | R131 | *F2 |
| C204 | D4 | C409 | E1 | C630 | B1 | C922 | E3 | FB201 | *D3 | IC401 | *D1 | Q104 | *A4 | R132 | *F2 |
| C205 | D4 | C410 | E1 | C631 | B1 | C923 | E2 | FB202 | C3 | IC402 | E1 | Q105 | *E3 | R133 | *F2 |
| C206 | D4 | C411 | E1 | C632 | *B1 | C924 | E3 | FB203 | C3 | IC403 | D1 | Q106 | *E2 | R134 | *F2 |
| C208 | C4 | C412 | *E1 | C633 | B1 | C925 | E3 | FB204 | *D4 | IC404 | *D1 | Q107 | *E3 | R135 | *F2 |
| C209 | *C2 | C413 | E1 | C634 | A2 | C926 | E2 | FB205 | *D4 | IC405 | *C1 | Q108 | *E3 | R136 | *F2 |
| C210 | *C1 | C414 | *D1 | C635 | *B2 | C927 | E2 | FB206 | *D3 | IC407 | *C3 | Q109 | *E3 | R137 | *F2 |
| C211 | *C1 | C415 | *D2 | C636 | *B2 | C928 | E2 | FB207 | *D3 | IC408 | B3 | Q110 | *E3 | R138 | *F3 |
| C212 | *C1 | C416 | *D2 | C637 | *A2 | C929 | E2 | FB208 | *D3 | IC409 | *B4 | Q111 | *F3 | R139 | *F3 |
| C213 | *C1 | C417 | E1 | C638 | *B2 | C930 | E2 | FB209 | *E3 | IC410 | C4 | Q112 | *F2 | R141 | *F4 |
| C214 | *C1 | C418 | E1 | C639 | *A1 | C931 | *F2 | FB210 | *E3 | IC411 | C4 | Q113 | F4 | R142 | *F4 |
| C215 | *C1 | C419 | *D2 | C640 | *B1 | C932 | *E2 | FB211 | E4 | IC412 | *C4 | Q114 | F4 | R143 | *F4 |
| C216 | *C1 | C420 | *D1 | C641 | *A1 | C933 | E2 | FB212 | *E3 | IC413 | C4 | Q115 | *F4 | R144 | *F4 |
| C218 | *C2 | C421 | *D1 | C642 | *B1 | C934 | E2 | FB213 | *E3 | IC414 | *C4 | Q116 | *F4 | R145 | *F4 |
| C219 | *B2 | C422 | E1 | C644 | B1 | C935 | E2 | FB214 | *D3 | IC415 | D4 | Q117 | *F4 | R146 | *F4 |

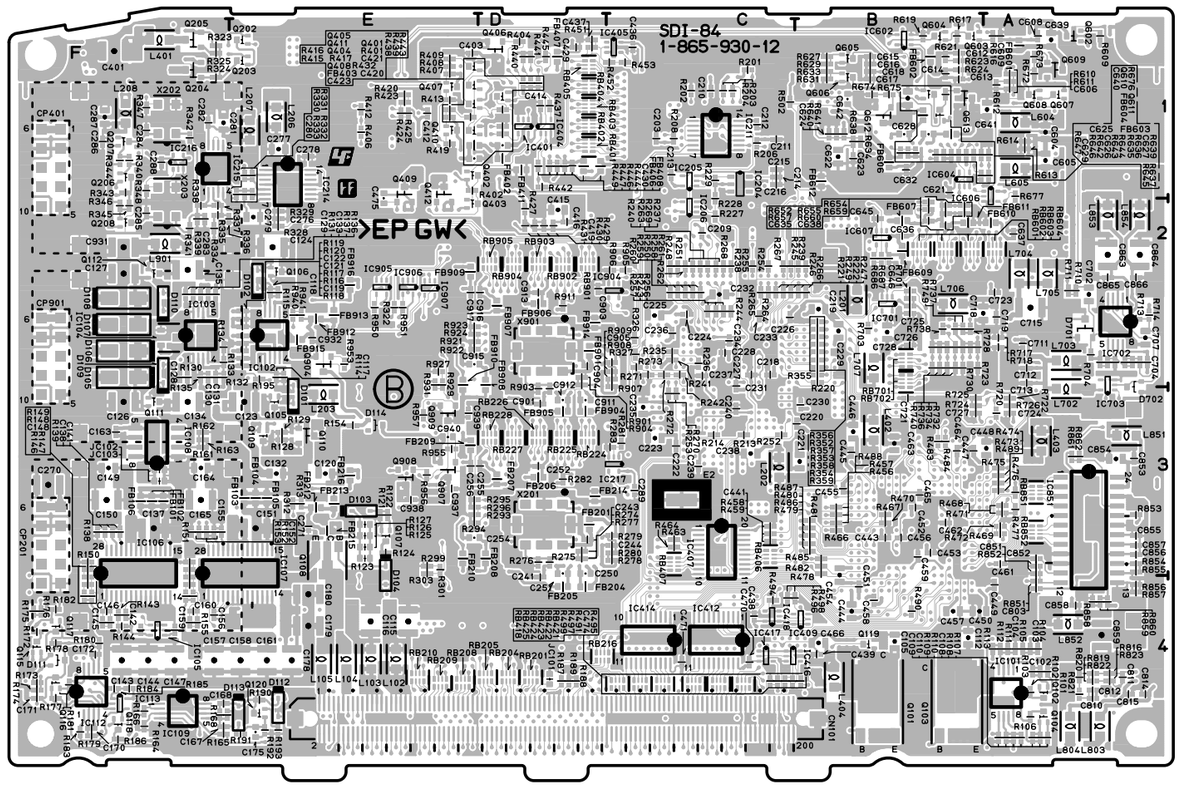


**SDI-84** -A SIDE-
SUFFIX: -13




**SDI-84** -B SIDE-
SUFFIX: -13

| | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| R147 | *F4 | R252 | *C3 | R344 | *F1 | R485 | *B3 | R685 | B1 | R867 | A2 | RB228 | *D3 | | |
| R148 | *F4 | R253 | *C3 | R345 | *F2 | R486 | *B3 | R686 | *B2 | R868 | A2 | RB401 | *D1 | | |
| R149 | *F3 | R254 | *C2 | R346 | *F2 | R487 | *B3 | R687 | *B2 | R869 | A2 | RB402 | *D1 | | |
| R150 | *F3 | R255 | *C2 | R347 | *F1 | R488 | *B3 | R701 | *B2 | R870 | A2 | RB403 | *D1 | | |
| R151 | *F3 | R256 | *C2 | R348 | *F1 | R489 | *A3 | R702 | *B2 | R871 | A2 | RB404 | *D1 | | |
| R152 | *F3 | R257 | *C2 | R349 | C3 | R490 | *B4 | R703 | *B2 | R872 | A2 | RB405 | *D1 | | |
| R153 | *F3 | R258 | *C2 | R350 | E4 | R491 | *C4 | R704 | *A2 | R873 | A2 | RB406 | *C3 | | |
| R154 | *E3 | R259 | *C2 | R351 | D4 | R494 | *C4 | R705 | *A2 | R874 | A2 | RB407 | *C3 | | |
| R155 | *F4 | R260 | *C2 | R352 | *B2 | R495 | *B4 | R706 | *A2 | R875 | A2 | RB413 | C1 | | |
| R156 | *F4 | R261 | *C2 | R353 | *B2 | R496 | *C4 | R707 | *A2 | R876 | A2 | RB414 | C4 | | |
| R157 | *F4 | R262 | *C2 | R354 | *B2 | R497 | *C4 | R708 | *A2 | R901 | *D2 | RB415 | C4 | | |
| R158 | *F4 | R263 | *C2 | R355 | *B2 | R498 | *B4 | R709 | *A2 | R902 | *D3 | RB416 | C4 | | |
| R159 | *F3 | R264 | *C2 | R356 | *B2 | R499 | *C4 | R710 | *A2 | R903 | *D3 | RB417 | C4 | | |
| R160 | *F3 | R265 | *C2 | R357 | *B2 | R500 | E1 | R711 | *A2 | R904 | *D2 | RB418 | *C4 | | |
| R164 | *F4 | R266 | *C2 | R358 | *B2 | R501 | E1 | R713 | *A2 | R905 | *C2 | RB419 | C4 | | |
| R165 | *F4 | R267 | *C2 | R359 | *B2 | R502 | *C1 | R714 | *A2 | R906 | *C2 | RB420 | C4 | | |
| R166 | *F4 | R268 | *C2 | R401 | *D1 | R601 | A1 | R715 | A2 | R907 | *C3 | RB421 | *C4 | | |
| R167 | *F4 | R269 | *C2 | R402 | *E1 | R602 | A1 | R716 | A2 | R908 | *C2 | RB422 | *C4 | | |
| R168 | *F4 | R270 | *C3 | R403 | E1 | R603 | A1 | R717 | *A2 | R909 | *C2 | RB423 | *C4 | | |
| R169 | F4 | R271 | *C2 | R404 | *D1 | R604 | A1 | R718 | *A2 | R910 | C2 | RB424 | *C4 | | |
| R170 | F4 | R272 | *C2 | R405 | E1 | R605 | A1 | R720 | *A3 | R911 | *D2 | RB425 | *C4 | | |
| R171 | F4 | R273 | *C2 | R406 | *E1 | R606 | A1 | R721 | *B2 | R912 | C2 | RB601 | *B2 | | |
| R172 | *F4 | R274 | *D3 | R407 | *E1 | R607 | A1 | R722 | *A3 | R913 | D3 | RB602 | *B2 | | |
| R173 | *F4 | R275 | *D3 | R408 | *E1 | R608 | A1 | R723 | *B2 | R914 | D3 | RB603 | *B2 | | |
| R174 | *F4 | R276 | *D3 | R409 | *E1 | R609 | *A1 | R724 | *B3 | R915 | D3 | RB604 | *A2 | | |
| R175 | *F4 | R277 | *D3 | R410 | E1 | R610 | *A1 | R725 | *B3 | R916 | E2 | RB701 | *B2 | | |
| R176 | *F4 | R278 | *C3 | R411 | E1 | R611 | *A1 | R726 | *A3 | R917 | E2 | RB702 | *B2 | | |
| R177 | *F4 | R279 | *C3 | R412 | *E1 | R612 | *A1 | R727 | *B2 | R918 | E2 | RB801 | A3 | | |
| R178 | *F4 | R280 | *C3 | R413 | *E1 | R613 | *A1 | R728 | *B2 | R919 | E2 | RB802 | A3 | | |
| R179 | *F4 | R281 | *C3 | R414 | E1 | R614 | *A1 | R729 | *B2 | R920 | E2 | RB851 | *A3 | | |
| R180 | *F4 | R282 | *D3 | R415 | *E1 | R615 | B1 | R730 | *B2 | R921 | *E2 | RB852 | *A3 | | |
| R181 | *F4 | R283 | *C3 | R416 | *E1 | R616 | *A1 | R731 | *B2 | R922 | *E2 | RB901 | *D2 | | |
| R182 | *F4 | R284 | C3 | R417 | *E1 | R617 | *B1 | R732 | *B2 | R923 | *E2 | RB902 | *D2 | | |
| R183 | *F4 | R285 | D4 | R418 | E1 | R618 | B1 | R733 | *B2 | R924 | *E2 | RB903 | *D2 | | |
| R184 | *F4 | R286 | D4 | R419 | *E1 | R619 | *B1 | R734 | *B2 | R925 | E2 | RB904 | *D2 | | |
| R185 | *F4 | R287 | D4 | R420 | *E1 | R620 | B1 | R735 | *B2 | R926 | E2 | RB905 | *D2 | | |
| R186 | *F4 | R288 | E3 | R421 | E1 | R621 | *B1 | R736 | *B2 | R927 | *E2 | | | | |
| R187 | *D4 | R289 | E3 | R422 | E1 | R622 | B1 | R737 | *B2 | R928 | E3 | S201 | E1 | | |
| R188 | *D4 | R290 | E3 | R423 | *E1 | R623 | *B1 | R738 | *B2 | R929 | *E2 | S202 | F1 | | |
| R189 | *D4 | R291 | E3 | R424 | *E1 | R624 | *B1 | R739 | *B2 | R930 | E2 | | | | |
| R190 | *E4 | R292 | E3 | R425 | *E1 | R625 | B1 | R740 | *B2 | R931 | *E2 | TP203 | D4 | | |
| R191 | *E4 | R293 | *E3 | R426 | E1 | R626 | B1 | R741 | B2 | R932 | E3 | TP401 | C1 | | |
| R192 | *E4 | R294 | *E3 | R427 | *D2 | R627 | *B1 | R742 | B2 | R933 | E2 | TP603 | B2 | | |
| R193 | *E4 | R295 | *E3 | R428 | E1 | R628 | B1 | R743 | B2 | R934 | E2 | TP701 | A2 | | |
| R194 | B4 | R296 | *E3 | R429 | *D2 | R629 | *B1 | R744 | B2 | R935 | E2 | TP702 | B2 | | |
| R195 | *E2 | R297 | E3 | R430 | *D2 | R630 | B1 | R745 | B2 | R936 | E3 | TP801 | A4 | | |
| R196 | *A4 | R298 | E3 | R431 | *D2 | R631 | *B1 | R746 | B2 | R937 | E3 | TP851 | A2 | | |
| R197 | *A4 | R299 | *E3 | R432 | *D1 | R633 | *B1 | R747 | B3 | R938 | E2 | | | | |
| R201 | *C1 | R300 | E4 | R433 | E1 | R634 | *B1 | R748 | B3 | R939 | E2 | X201 | *D3 | | |
| R202 | *C1 | R301 | *E3 | R434 | E1 | R635 | *B1 | R749 | *B2 | R940 | *E2 | X202 | *F1 | | |
| R203 | *C1 | R302 | E3 | R435 | E1 | R636 | *B1 | R801 | A3 | R941 | *E2 | X203 | *F2 | | |
| R204 | *C1 | R303 | *E3 | R436 | E1 | R637 | *A1 | R802 | A3 | R942 | E2 | X401 | D2 | | |
| R205 | E4 | R304 | E4 | R437 | *D1 | R638 | *B1 | R803 | A3 | R943 | E2 | X601 | B1 | | |
| R206 | *C1 | R305 | E3 | R438 | *D1 | R639 | *A1 | R804 | A3 | R944 | E2 | X901 | *D2 | | |
| R207 | D4 | R306 | E3 | R439 | *D1 | R640 | *B1 | R805 | A3 | R945 | E2 | | | | |
| R208 | *C1 | R307 | E3 | R440 | *D1 | R641 | *B1 | R806 | A3 | R946 | E2 | *:B SIDE | | | |
| R209 | C4 | R308 | E4 | R441 | *D1 | R642 | *B1 | R807 | A3 | R947 | E2 | | | | |
| R210 | C4 | R309 | E4 | R442 | *D1 | R643 | *B1 | R808 | A3 | R948 | E2 | | | | |
| R211 | C3 | R310 | E3 | R443 | *D1 | R644 | *B1 | R809 | A3 | R949 | E2 | | | | |
| R212 | D4 | R311 | E3 | R444 | *D1 | R645 | *B1 | R810 | A3 | R950 | *E2 | | | | |
| R213 | *C3 | R312 | *E3 | R445 | *D1 | R646 | *B1 | R811 | A4 | R951 | *E2 | | | | |
| R214 | *C3 | R313 | *E3 | R446 | *D1 | R647 | *B1 | R812 | A4 | R952 | E2 | | | | |
| R215 | D4 | R314 | E3 | R447 | *D1 | R648 | B1 | R813 | A4 | R953 | *E2 | | | | |
| R216 | D4 | R315 | E3 | R449 | *D1 | R649 | A1 | R814 | A4 | R954 | E3 | | | | |
| R217 | E4 | R316 | E3 | R451 | *D1 | R650 | A1 | R815 | A4 | R955 | *E3 | | | | |
| R218 | E4 | R317 | E3 | R452 | *C1 | R651 | A1 | R816 | *A4 | R956 | *E3 | | | | |
| R220 | *B2 | R318 | E3 | R453 | *C1 | R652 | *B2 | R817 | A4 | R957 | *E3 | | | | |
| R221 | *C2 | R319 | E3 | R456 | *B3 | R653 | A1 | R818 | A4 | R958 | E2 | | | | |
| R222 | *B2 | R320 | E3 | R457 | *B3 | R654 | *B2 | R819 | *A4 | R959 | E2 | | | | |
| R224 | C4 | R321 | E3 | R458 | *C3 | R655 | *B2 | R820 | *A4 | | | | | | |
| R225 | C4 | R322 | *E2 | R459 | *C3 | R656 | A1 | R821 | *A4 | RB201 | *D4 | | | | |
| R226 | D4 | R323 | *F1 | R463 | *C3 | R657 | *B2 | R822 | *A4 | RB202 | D4 | | | | |
| R227 | *C2 | R324 | *F1 | R464 | *C3 | R658 | A1 | R823 | *A4 | RB203 | D4 | | | | |
| R228 | *C2 | R325 | *F1 | R466 | *B3 | R659 | *B2 | R824 | A4 | RB204 | *D4 | | | | |
| R229 | *C1 | R326 | *C2 | R467 | *B3 | R660 | *B2 | R825 | A4 | RB205 | *D4 | | | | |
| R235 | *C2 | R327 | *C2 | R468 | *A3 | R661 | A1 | R826 | A4 | RB206 | E4 | | | | |
| R236 | *C2 | R328 | *E2 | R469 | *A3 | R663 | A2 | R851 | *A4 | RB207 | E4 | | | | |
| R237 | *C2 | R329 | *E2 | R470 | *B3 | R665 | A2 | R852 | *A3 | RB208 | *E4 | | | | |
| R238 | *C2 | R330 | *E1 | R471 | *A3 | R666 | B1 | R853 | *A3 | RB209 | *E4 | | | | |
| R239 | *B2 | R331 | *E1 | R472 | *A3 | R667 | B2 | R854 | *A3 | RB210 | *E4 | | | | |
| R240 | *C2 | R332 | *E1 | R473 | *A3 | R668 | B2 | R855 | *A3 | RB211 | C4 | | | | |
| R241 | *C2 | R333 | *E1 | R474 | *A3 | R669 | B2 | R856 | *A4 | RB212 | C4 | | | | |
| R242 | *C2 | R334 | *F2 | R475 | *A3 | R670 | A2 | R857 | *A4 | RB213 | D4 | | | | |
| R243 | *C2 | R335 | *F2 | R476 | *A3 | R671 | A2 | R858 | *A4 | RB214 | D4 | | | | |
| R244 | *C2 | R336 | *E2 | R477 | *A3 | R672 | *A1 | R859 | *A4 | RB215 | D4 | | | | |
| R245 | *C2 | R337 | *F2 | R478 | *B3 | R673 | *A1 | R860 | *A4 | RB216 | *D4 | | | | |
| R246 | *B2 | R338 | *F2 | R479 | *B3 | R674 | *B1 | R861 | *A3 | RB222 | E1 | | | | |
| R247 | *B2 | R339 | *F2 | R480 | *B3 | R675 | *B1 | R862 | *A3 | RB223 | E1 | | | | |
| R248 | *C2 | R340 | *F1 | R481 | *B3 | R676 | *B1 | R863 | A2 | RB224 | *D3 | | | | |
| R249 | *C2 | R341 | *F2 | R482 | *B3 | R677 | *A1 | R864 | A2 | RB225 | *D3 | | | | |
| R250 | *C2 | R342 | *F1 | R483 | *B3 | R683 | B1 | R865 | A2 | RB226 | *D3 | | | | |
| R251 | *C2 | R343 | *F1 | R484 | *B3 | R684 | B1 | R866 | A2 | RB227 | *D3 | | | | |

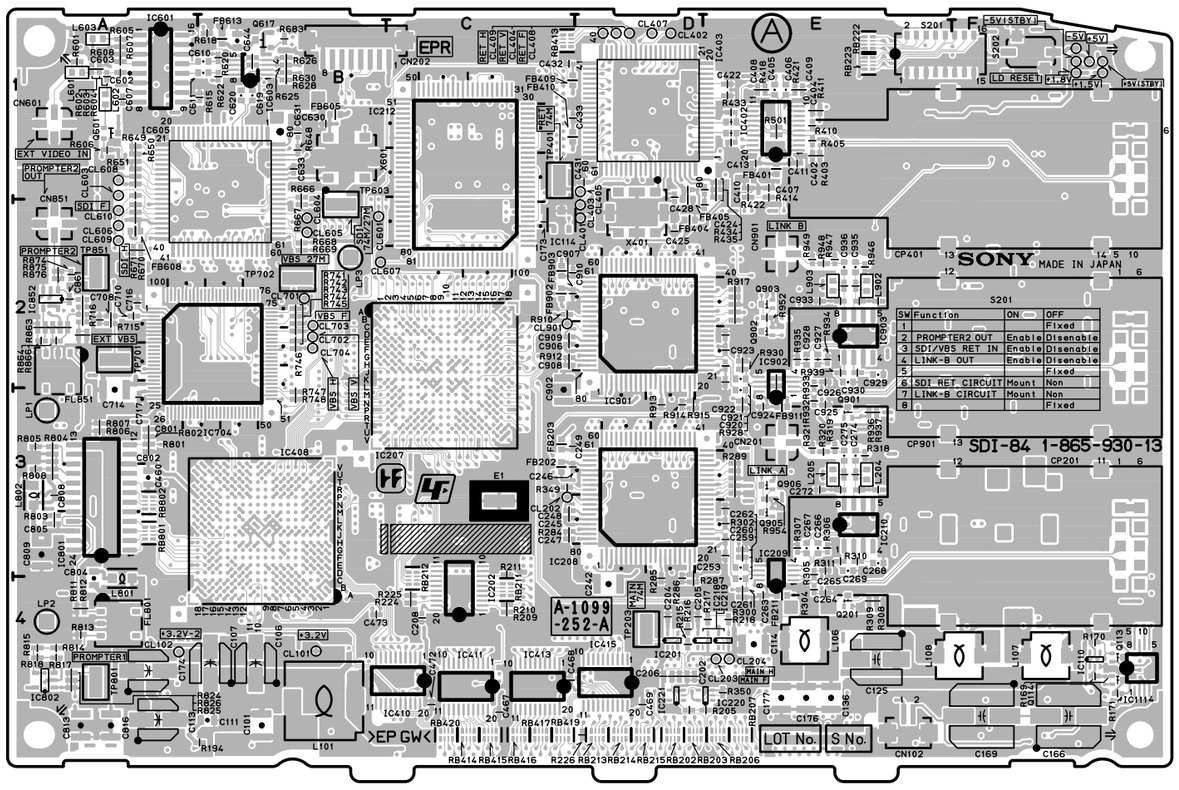SDI-84 (1-865-930-14)

| | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| C101 | A4 | C221 | *B3 | C424 | E1 | C646 | *B2 | C937 | *E3 | FB216 | *E3 | IC417 | *C4 | Q119 | *B4 |
| C102 | *A4 | C222 | *C3 | C425 | D2 | C701 | *B2 | C938 | *E3 | FB401 | E1 | IC418 | *C4 | Q120 | *E4 |
| C103 | *A4 | C223 | *C3 | C426 | E2 | C702 | *A2 | C939 | *E3 | FB402 | *D1 | IC601 | A1 | Q201 | E4 |
| C104 | *A4 | C224 | *C2 | C427 | D1 | C703 | *A2 | C940 | *E3 | FB403 | *E1 | IC602 | *B1 | Q202 | *E1 |
| C105 | *B4 | C225 | *C2 | C428 | D1 | C704 | *A2 | | | FB404 | D2 | IC603 | B1 | Q203 | *E1 |
| C106 | B4 | C226 | *C2 | C429 | *D1 | C707 | *A2 | CL101 | B4 | FB405 | D2 | IC604 | *B1 | Q204 | *F1 |
| C107 | B4 | C227 | *C2 | C430 | *D1 | C708 | A2 | CL102 | A4 | FB406 | *D1 | IC605 | B1 | Q205 | *F1 |
| C108 | *A4 | C228 | *C2 | C431 | D1 | C710 | A2 | CL103 | F1 | FB407 | *D1 | IC606 | *A1 | Q206 | *F1 |
| C109 | *A4 | C229 | *B2 | C432 | C1 | C711 | *A2 | CL104 | F1 | FB408 | *D1 | IC607 | *B2 | Q207 | *F1 |
| C110 | *A4 | C230 | *B3 | C433 | C1 | C712 | *A2 | CL105 | F1 | FB409 | C1 | IC701 | *B2 | Q208 | *F2 |
| C111 | A4 | C231 | *C2 | C436 | *C1 | C713 | *A2 | CL106 | F1 | FB410 | C1 | IC702 | *A2 | Q401 | *D1 |
| C112 | *B4 | C232 | *C2 | C437 | *D1 | C714 | A3 | CL107 | F1 | FB411 | *D1 | IC703 | *A2 | Q402 | *E1 |
| C114 | E4 | C233 | *C2 | C438 | *C4 | C715 | *A2 | CL108 | F1 | FB601 | *A1 | IC704 | B2 | Q403 | *E2 |
| C115 | *E4 | C234 | *C2 | C439 | *B4 | C716 | A2 | CL202 | C3 | FB602 | *B1 | IC801 | A3 | Q404 | *E1 |
| C116 | *E4 | C235 | *C3 | C441 | *C3 | C717 | A3 | CL203 | E4 | FB603 | *B1 | IC802 | A4 | Q405 | *E1 |
| C117 | *E2 | C236 | *C2 | C443 | *B3 | C718 | *A2 | CL204 | E4 | FB604 | *B1 | IC851 | *A3 | Q406 | *D1 |
| C118 | *E2 | C237 | *C2 | C444 | *B4 | C719 | *A2 | CL401 | D2 | FB605 | B1 | IC852 | A2 | Q407 | *E1 |
| C119 | *E2 | C238 | *C3 | C445 | *B3 | C721 | *B3 | CL402 | D1 | FB606 | *B1 | IC901 | D2 | Q408 | *E1 |
| C120 | *E3 | C239 | *C3 | C446 | *B3 | C723 | *A2 | CL403 | D2 | FB607 | *B2 | IC902 | E3 | Q409 | *E1 |
| C121 | *E2 | C240 | *C3 | C447 | *B3 | C724 | *A3 | CL404 | D1 | FB608 | A2 | IC903 | E2 | Q410 | *E1 |
| C122 | *E2 | C241 | *D4 | C448 | *A3 | C725 | *B2 | CL405 | D1 | FB609 | *B2 | IC904 | *C2 | Q411 | *E1 |
| C123 | *E3 | C242 | D4 | C449 | *A4 | C726 | *B2 | CL407 | D1 | FB610 | *A2 | IC905 | *E2 | Q412 | *E1 |
| C124 | *E2 | C243 | *D3 | C450 | *B4 | C727 | *B3 | CL408 | D1 | FB611 | *B2 | IC906 | *E2 | Q601 | A1 |
| C125 | E4 | C244 | *C3 | C451 | *B4 | C728 | *B2 | CL409 | D1 | FB612 | *B1 | IC907 | *E2 | Q602 | *A1 |
| C126 | *F3 | C245 | C3 | C452 | *B3 | C801 | A3 | CL601 | B2 | FB613 | B1 | | | Q603 | *B1 |
| C127 | *F2 | C246 | C3 | C453 | *B3 | C802 | A3 | CL603 | A1 | FB901 | *D2 | JC101 | *D4 | Q604 | *B1 |
| C128 | *F2 | C247 | C3 | C454 | *B3 | C803 | *A4 | CL604 | B2 | FB902 | C2 | | | Q605 | *B1 |
| C129 | *F2 | C248 | C3 | C455 | *B3 | C804 | A4 | CL605 | B2 | FB903 | C2 | L101 | B4 | Q606 | *B1 |
| C130 | *F2 | C249 | C3 | C456 | *B3 | C805 | A3 | CL606 | A2 | FB904 | *D3 | L102 | *E4 | Q607 | *A1 |
| C131 | *F2 | C250 | *D3 | C457 | *B4 | C806 | A3 | CL607 | B2 | FB905 | *D3 | L103 | *E4 | Q608 | *A1 |
| C132 | *E3 | C251 | *D3 | C458 | *B4 | C807 | A3 | CL608 | A1 | FB906 | *D2 | L104 | *E4 | Q609 | *A1 |
| C133 | *F2 | C252 | *D3 | C459 | *B3 | C808 | A3 | CL609 | A2 | FB907 | *D2 | L105 | *E4 | Q610 | *B1 |
| C134 | *F3 | C253 | D3 | C460 | A3 | C809 | A3 | CL610 | A2 | FB908 | *D2 | L106 | E4 | Q611 | *B1 |
| C135 | *F2 | C254 | *E3 | C461 | *A3 | C810 | *A4 | CL701 | B2 | FB909 | *E2 | L107 | F4 | Q612 | *B1 |
| C136 | E4 | C255 | *D3 | C462 | *B3 | C811 | *A4 | CL702 | B2 | FB910 | *E2 | L108 | F4 | Q613 | *B1 |
| C137 | *F3 | C256 | *E3 | C463 | *B3 | C812 | *A4 | CL703 | B2 | FB911 | E3 | L201 | *B2 | Q617 | B1 |
| C138 | *F3 | C257 | E3 | C464 | *B3 | C813 | A4 | CL704 | B2 | FB912 | *E2 | L202 | *C3 | Q901 | E3 |
| C141 | *F3 | C258 | E3 | C465 | *B3 | C814 | *A4 | CL901 | C2 | FB913 | *E2 | L203 | *E3 | Q902 | E2 |
| C142 | *F4 | C259 | E4 | C466 | *B4 | C815 | *A4 | | | FB914 | *D2 | L204 | E3 | Q903 | E2 |
| C143 | *F4 | C260 | E3 | C467 | C4 | C816 | A4 | CN101 | *D4 | FB915 | *E2 | L205 | E3 | Q904 | *E2 |
| C144 | *F4 | C261 | E4 | C468 | C4 | C851 | *A3 | CN102 | E4 | FB916 | *E2 | L206 | *E1 | Q905 | E3 |
| C145 | *F4 | C262 | E3 | C469 | D4 | C852 | *A3 | CN201 | E3 | | | L207 | *E1 | Q906 | E3 |
| C146 | *F4 | C263 | E4 | C470 | *C4 | C853 | *A3 | CN202 | B1 | FL801 | A4 | L208 | *F1 | Q907 | *E3 |
| C147 | *F4 | C264 | E4 | C471 | *C4 | C854 | *A3 | CN601 | A1 | FL851 | A2 | L401 | *F1 | Q908 | *E3 |
| C148 | *F4 | C265 | E3 | C472 | C4 | C855 | *A3 | CN851 | A2 | | | L402 | *B3 | Q909 | *E3 |
| C149 | *F3 | C266 | E3 | C473 | B4 | C856 | *A3 | CN901 | E2 | IC101 | *A4 | L403 | *A3 | | |
| C150 | *F3 | C267 | E3 | C474 | *C4 | C857 | *A3 | | | IC102 | *E2 | L404 | *B4 | R101 | *A4 |
| C151 | *E3 | C268 | E3 | C475 | *E2 | C858 | *A4 | CP201 | E3 | IC103 | *F2 | L601 | A1 | R102 | *A4 |
| C152 | *F3 | C269 | E3 | C476 | *E1 | C859 | *A4 | CP401 | E1 | IC104 | *F2 | L602 | A1 | R103 | *A4 |
| C155 | *F3 | C270 | *F3 | C602 | A1 | C860 | A2 | CP901 | E2 | IC105 | *F4 | L603 | A1 | R104 | *A4 |
| C156 | *F4 | C271 | *E3 | C603 | A1 | C861 | A2 | | | IC106 | *F3 | L604 | *A1 | R105 | *A4 |
| C157 | *F4 | C272 | E3 | C604 | *A1 | C862 | A2 | D101 | *E3 | IC107 | *E3 | L605 | *A1 | R106 | *A4 |
| C158 | *E4 | C273 | E3 | C605 | *A1 | C863 | *A2 | D102 | *E2 | IC109 | *F4 | L702 | *A3 | R107 | *A4 |
| C159 | *F4 | C274 | E3 | C606 | *A1 | C864 | *A2 | D103 | *E3 | IC110 | F4 | L703 | *A2 | R108 | *A4 |
| C160 | *F4 | C275 | E3 | C607 | A1 | C865 | *A2 | D104 | *E4 | IC111 | F4 | L704 | *A2 | R109 | *A4 |
| C161 | *E4 | C276 | *E2 | C608 | *A1 | C866 | *A2 | D105 | *F2 | IC112 | *F4 | L705 | *A2 | R110 | *A4 |
| C162 | *F4 | C277 | *E1 | C609 | *A1 | C901 | *D3 | D106 | *F2 | IC113 | *F4 | L706 | *B2 | R111 | *A4 |
| C164 | *F3 | C278 | *E1 | C610 | B1 | C902 | C3 | D107 | *F2 | IC114 | C2 | L707 | *B2 | R112 | *A4 |
| C165 | *F3 | C279 | *E2 | C611 | B1 | C903 | *D2 | D108 | *F2 | IC201 | D4 | L801 | A4 | R113 | *A4 |
| C166 | F4 | C280 | *E1 | C612 | *B1 | C904 | *D2 | D109 | *F2 | IC202 | C4 | L802 | A3 | R114 | *E2 |
| C167 | *F4 | C281 | *F1 | C613 | *B1 | C905 | *C2 | D110 | *F2 | IC204 | *C1 | L803 | *A4 | R115 | *E2 |
| C168 | *F4 | C282 | *F1 | C614 | *B1 | C906 | C2 | D111 | *F4 | IC205 | *C1 | L804 | *A4 | R116 | *E2 |
| C169 | F4 | C283 | *F2 | C615 | *B1 | C907 | C2 | D112 | *E4 | IC206 | *C2 | L851 | *A3 | R117 | *E2 |
| C170 | *F4 | C284 | *F1 | C616 | *B1 | C908 | C2 | D113 | *E4 | IC207 | C2 | L852 | *A4 | R118 | *E2 |
| C171 | *F4 | C285 | *F2 | C617 | *B1 | C909 | C2 | D114 | *E3 | IC208 | D3 | L853 | *A2 | R119 | *E2 |
| C172 | *F4 | C286 | *F1 | C618 | *B1 | C910 | C2 | D701 | *A2 | IC209 | E4 | L854 | *A2 | R120 | *E2 |
| C173 | C2 | C287 | *F1 | C619 | B1 | C911 | *D3 | D702 | *A3 | IC210 | E3 | L901 | *F2 | R121 | *E3 |
| C174 | A4 | C288 | *F1 | C620 | B1 | C912 | *D3 | | | IC211 | *C1 | L902 | E2 | R122 | *E3 |
| C175 | *E4 | C289 | *C3 | C621 | *B1 | C913 | *D2 | E1 | C3 | IC212 | C1 | L903 | E2 | R123 | *E3 |
| C176 | E4 | C401 | *F1 | C622 | *B1 | C914 | D3 | E2 | *C3 | IC214 | *E1 | | | R124 | *E3 |
| C177 | E4 | C402 | E1 | C623 | *B1 | C915 | *E2 | | | IC215 | *F1 | LP1 | A3 | R125 | *E3 |
| C178 | *E4 | C403 | *E1 | C624 | *B1 | C916 | *D2 | FB101 | *F3 | IC216 | *F1 | LP2 | A4 | R126 | *E3 |
| C179 | *E4 | C404 | E1 | C625 | *B1 | C917 | *E2 | FB102 | *F3 | IC217 | *C3 | LP3 | B2 | R127 | *E3 |
| C180 | *E4 | C405 | E1 | C626 | *B1 | C918 | E2 | FB103 | *E3 | IC218 | D4 | | | R128 | *E3 |
| C201 | D4 | C406 | E1 | C627 | *B1 | C919 | E2 | FB104 | *E3 | IC219 | E4 | Q101 | *B4 | R129 | *E3 |
| C202 | D4 | C407 | E1 | C628 | *B1 | C920 | E3 | FB105 | *E3 | IC220 | E4 | Q102 | *A4 | R130 | *F2 |
| C203 | *C1 | C408 | E1 | C629 | *B1 | C921 | E2 | FB106 | *F3 | IC221 | D4 | Q103 | *B4 | R131 | *F2 |
| C204 | D4 | C409 | E1 | C630 | B1 | C922 | E3 | FB201 | *D3 | IC401 | *D1 | Q104 | *A4 | R132 | *F2 |
| C205 | D4 | C410 | E1 | C631 | B1 | C923 | E2 | FB202 | C3 | IC402 | E1 | Q105 | *E3 | R133 | *F2 |
| C206 | D4 | C411 | E1 | C632 | *B1 | C924 | E3 | FB203 | C3 | IC403 | D1 | Q106 | *E2 | R134 | *F2 |
| C208 | C4 | C412 | *E1 | C633 | B1 | C925 | E3 | FB204 | *D4 | IC404 | *D1 | Q107 | *E3 | R135 | *F2 |
| C209 | *C2 | C413 | E1 | C634 | A2 | C926 | E2 | FB205 | *D4 | IC405 | *C1 | Q108 | *E3 | R136 | *F2 |
| C210 | *C1 | C414 | *D1 | C635 | *B2 | C927 | E2 | FB206 | *D3 | IC407 | *C3 | Q109 | *E3 | R137 | *F2 |
| C211 | *C1 | C415 | *D2 | C636 | *B2 | C928 | E2 | FB207 | *D3 | IC408 | B3 | Q110 | *E3 | R138 | *F3 |
| C212 | *C1 | C416 | *D2 | C637 | *A2 | C929 | E2 | FB208 | *D3 | IC409 | *B4 | Q111 | *F3 | R139 | *F3 |
| C213 | *C1 | C417 | E1 | C638 | *B2 | C930 | E2 | FB209 | *E3 | IC410 | C4 | Q112 | *F2 | R141 | *F4 |
| C214 | *C1 | C418 | E1 | C639 | *A1 | C931 | *F2 | FB210 | *E3 | IC411 | C4 | Q113 | F4 | R142 | *F4 |
| C215 | *C1 | C419 | *D2 | C640 | *B1 | C932 | *E2 | FB211 | E4 | IC412 | *C4 | Q114 | F4 | R143 | *F4 |
| C216 | *C1 | C420 | *D1 | C641 | *A1 | C933 | E2 | FB212 | *E3 | IC413 | C4 | Q115 | *F4 | R144 | *F4 |
| C218 | *C2 | C421 | *D1 | C642 | *B1 | C934 | E2 | FB213 | *E3 | IC414 | *C4 | Q116 | *F4 | R145 | *F4 |
| C219 | *B2 | C422 | E1 | C644 | B1 | C935 | E2 | FB214 | *D3 | IC415 | D4 | Q117 | *F4 | R146 | *F4 |
| C220 | *B3 | C423 | *E1 | C645 | *B2 | C936 | E2 | FB215 | *E3 | IC416 | *C4 | Q118 | *F4 | R147 | *F4 |

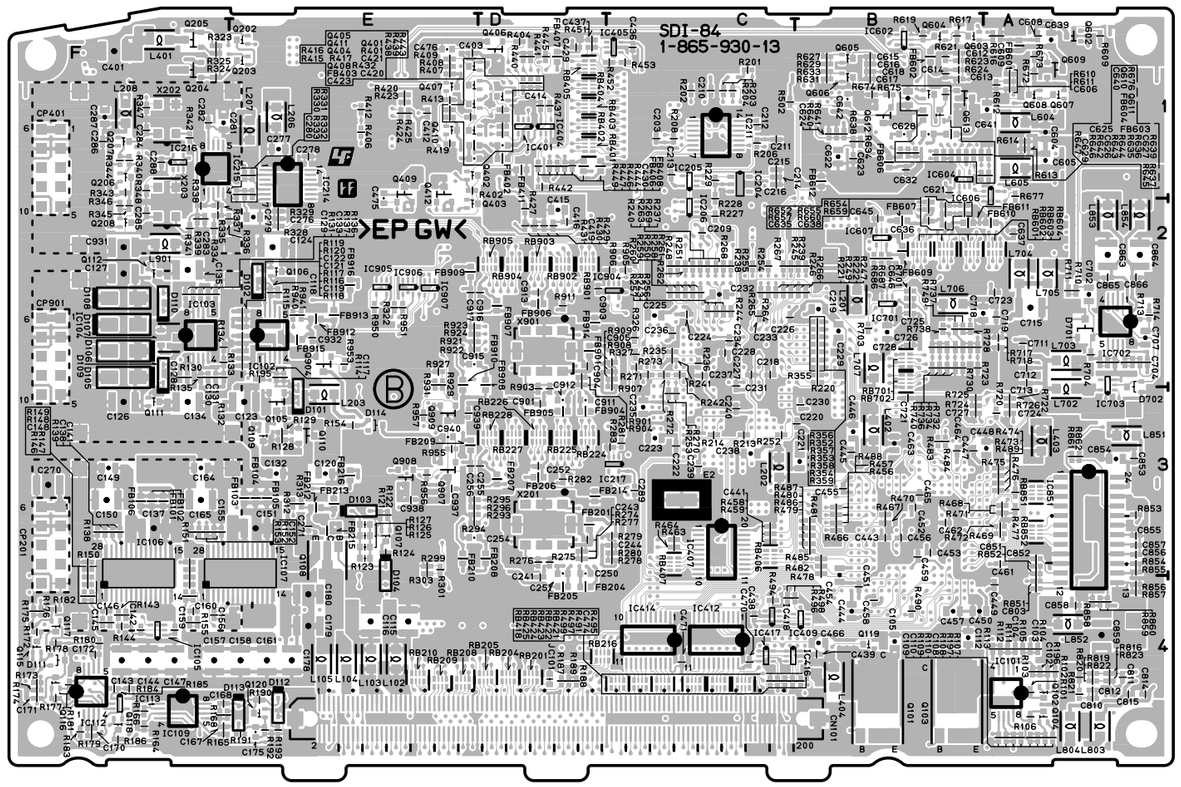


**SDI-84** -A SIDE-
SUFFIX: -14




**SDI-84** -B SIDE-
SUFFIX: -14

| | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| R148 | *F4 | R251 | *C2 | R343 | *F1 | R484 | *B3 | R684 | B1 | R866 | A2 | RB227 | *D3 | | |
| R149 | *F3 | R252 | *C3 | R344 | *F1 | R485 | *B3 | R685 | B1 | R867 | A2 | RB228 | *D3 | | |
| R150 | *F3 | R253 | *C3 | R345 | *F2 | R486 | *B3 | R686 | *B2 | R868 | A2 | RB401 | *D1 | | |
| R151 | *F3 | R254 | *C2 | R346 | *F2 | R487 | *B3 | R687 | *B2 | R869 | A2 | RB402 | *D1 | | |
| R152 | *F3 | R255 | *C2 | R347 | *F1 | R488 | *B3 | R701 | *B2 | R870 | A2 | RB403 | *D1 | | |
| R153 | *F3 | R256 | *C2 | R348 | *F1 | R489 | *A3 | R702 | *B2 | R871 | A2 | RB404 | *D1 | | |
| R154 | *E3 | R257 | *C2 | R349 | C3 | R490 | *B4 | R703 | *B2 | R872 | A2 | RB405 | *D1 | | |
| R155 | *F4 | R258 | *C2 | R350 | E4 | R491 | *C4 | R704 | *A2 | R873 | A2 | RB406 | *C3 | | |
| R156 | *F4 | R259 | *C2 | R351 | D4 | R494 | *C4 | R705 | *A2 | R874 | A2 | RB407 | *C3 | | |
| R157 | *F4 | R260 | *C2 | R352 | *B2 | R495 | *B4 | R706 | *A2 | R875 | A2 | RB413 | C1 | | |
| R158 | *F4 | R261 | *C2 | R353 | *B2 | R496 | *C4 | R707 | *A2 | R876 | A2 | RB414 | C4 | | |
| R159 | *F3 | R262 | *C2 | R354 | *B2 | R497 | *C4 | R708 | *A2 | R901 | *D2 | RB415 | C4 | | |
| R160 | *F3 | R263 | *C2 | R355 | *B2 | R498 | *B4 | R709 | *A2 | R902 | *D3 | RB416 | C4 | | |
| R164 | *F4 | R264 | *C2 | R356 | *B2 | R499 | *C4 | R710 | *A2 | R903 | *D3 | RB417 | C4 | | |
| R165 | *F4 | R265 | *C2 | R357 | *B2 | R500 | E1 | R711 | *A2 | R904 | *D2 | RB418 | *C4 | | |
| R166 | *F4 | R266 | *C2 | R358 | *B2 | R501 | E1 | R713 | *A2 | R905 | *C2 | RB419 | C4 | | |
| R167 | *F4 | R267 | *C2 | R359 | *B2 | R502 | *C1 | R714 | *A2 | R906 | *C2 | RB420 | C4 | | |
| R168 | *F4 | R268 | *C2 | R401 | *D1 | R601 | A1 | R715 | A2 | R907 | *C3 | RB421 | *C4 | | |
| R169 | F4 | R269 | *C2 | R402 | *E1 | R602 | A1 | R716 | A2 | R908 | *C2 | RB422 | *C4 | | |
| R170 | F4 | R270 | *C3 | R403 | E1 | R603 | A1 | R717 | *A2 | R909 | *C2 | RB423 | *C4 | | |
| R171 | F4 | R271 | *C2 | R404 | *D1 | R604 | A1 | R718 | *A2 | R910 | C2 | RB424 | *C4 | | |
| R172 | *F4 | R272 | *C2 | R405 | E1 | R605 | A1 | R720 | *A3 | R911 | *D2 | RB425 | *C4 | | |
| R173 | *F4 | R273 | *C2 | R406 | *E1 | R606 | A1 | R721 | *B2 | R912 | C2 | RB601 | *B2 | | |
| R174 | *F4 | R274 | *D3 | R407 | *E1 | R607 | A1 | R722 | *A3 | R913 | D3 | RB602 | *B2 | | |
| R175 | *F4 | R275 | *D3 | R408 | *E1 | R608 | A1 | R723 | *B2 | R914 | D3 | RB603 | *B2 | | |
| R176 | *F4 | R276 | *D3 | R409 | *E1 | R609 | *A1 | R724 | *B3 | R915 | D3 | RB604 | *A2 | | |
| R177 | *F4 | R277 | *D3 | R410 | E1 | R610 | *A1 | R725 | *B3 | R916 | E2 | RB701 | *B2 | | |
| R178 | *F4 | R278 | *C3 | R411 | E1 | R611 | *A1 | R726 | *A3 | R917 | E2 | RB702 | *B2 | | |
| R179 | *F4 | R279 | *C3 | R412 | *E1 | R612 | *A1 | R727 | *B2 | R918 | E2 | RB801 | A3 | | |
| R180 | *F4 | R280 | *C3 | R413 | *E1 | R613 | *A1 | R728 | *B2 | R919 | E2 | RB802 | A3 | | |
| R181 | *F4 | R281 | *C3 | R414 | E1 | R614 | *A1 | R729 | *B2 | R920 | E2 | RB851 | *A3 | | |
| R182 | *F4 | R282 | *D3 | R415 | *E1 | R615 | B1 | R730 | *B2 | R921 | *E2 | RB852 | *A3 | | |
| R183 | *F4 | R283 | *C3 | R416 | *E1 | R616 | *A1 | R731 | *B2 | R922 | *E2 | RB901 | *D2 | | |
| R184 | *F4 | R284 | C3 | R417 | *E1 | R617 | *B1 | R732 | *B2 | R923 | *E2 | RB902 | *D2 | | |
| R185 | *F4 | R285 | D4 | R418 | E1 | R618 | B1 | R733 | *B2 | R924 | *E2 | RB903 | *D2 | | |
| R186 | *F4 | R286 | D4 | R419 | *E1 | R619 | *B1 | R734 | *B2 | R925 | E2 | RB904 | *D2 | | |
| R187 | *D4 | R287 | D4 | R420 | *E1 | R620 | B1 | R735 | *B2 | R926 | E2 | RB905 | *D2 | | |
| R188 | *D4 | R288 | E3 | R421 | E1 | R621 | *B1 | R736 | *B2 | R927 | *E2 | | | | |
| R189 | *D4 | R289 | E3 | R422 | E1 | R622 | B1 | R737 | *B2 | R928 | E3 | S201 | E1 | | |
| R190 | *E4 | R290 | E3 | R423 | *E1 | R623 | *B1 | R738 | *B2 | R929 | *E2 | S202 | F1 | | |
| R191 | *E4 | R291 | E3 | R424 | *E1 | R624 | *B1 | R739 | *B2 | R930 | E2 | | | | |
| R192 | *E4 | R292 | E3 | R425 | *E1 | R625 | B1 | R740 | *B2 | R931 | *E2 | TP203 | D4 | | |
| R193 | *E4 | R293 | *E3 | R426 | E1 | R626 | B1 | R741 | B2 | R932 | E3 | TP401 | C1 | | |
| R194 | A4 | R294 | *E3 | R427 | *D2 | R627 | *B1 | R742 | B2 | R933 | E2 | TP603 | B2 | | |
| R195 | *E2 | R295 | *E3 | R428 | E1 | R628 | B1 | R743 | B2 | R934 | E2 | TP701 | A2 | | |
| R196 | *A4 | R296 | *E3 | R429 | *D2 | R629 | *B1 | R744 | B2 | R935 | E2 | TP702 | B2 | | |
| R197 | *A4 | R297 | E3 | R430 | *D2 | R630 | B1 | R745 | B2 | R936 | E3 | TP801 | A4 | | |
| R198 | A4 | R298 | E3 | R431 | *D2 | R631 | *B1 | R746 | B2 | R937 | E3 | TP851 | A2 | | |
| R199 | A4 | R299 | *E3 | R432 | *D1 | R633 | *B1 | R747 | B3 | R938 | E2 | | | | |
| R201 | *C1 | R300 | E4 | R433 | E1 | R634 | *B1 | R748 | B3 | R939 | E2 | VDR101 | E4 | | |
| R202 | *C1 | R301 | *E3 | R434 | E1 | R635 | *B1 | R749 | *B2 | R940 | *E2 | | | | |
| R203 | *C1 | R302 | E3 | R435 | E1 | R636 | *B1 | R801 | A3 | R941 | *E2 | X201 | *D3 | | |
| R204 | *C1 | R303 | *E3 | R436 | E1 | R637 | *A1 | R802 | A3 | R942 | E2 | X202 | *F1 | | |
| R205 | E4 | R304 | E4 | R437 | *D1 | R638 | *B1 | R803 | A3 | R943 | E2 | X203 | *F2 | | |
| R206 | *C1 | R305 | E3 | R438 | *D1 | R639 | *A1 | R804 | A3 | R944 | E2 | X401 | D2 | | |
| R207 | D4 | R306 | E3 | R439 | *D1 | R640 | *B1 | R805 | A3 | R945 | E2 | X601 | B1 | | |
| R208 | *C1 | R307 | E3 | R440 | *D1 | R641 | *B1 | R806 | A3 | R946 | E2 | X901 | *D2 | | |
| R209 | C4 | R308 | E4 | R441 | *D1 | R642 | *B1 | R807 | A3 | R947 | E2 | | | | |
| R210 | C4 | R309 | E4 | R442 | *D1 | R643 | *B1 | R808 | A3 | R948 | E2 | *:B SIDE | | | |
| R211 | C3 | R310 | E3 | R443 | *D1 | R644 | *B1 | R809 | A3 | R949 | E2 | | | | |
| R212 | D4 | R311 | E3 | R444 | *D1 | R645 | *B1 | R810 | A3 | R950 | *E2 | | | | |
| R213 | *C3 | R312 | *E3 | R445 | *D1 | R646 | *B1 | R811 | A4 | R951 | *E2 | | | | |
| R214 | *C3 | R313 | *E3 | R446 | *D1 | R647 | *B1 | R812 | A4 | R952 | E2 | | | | |
| R215 | D4 | R314 | E3 | R447 | *D1 | R648 | B1 | R813 | A4 | R953 | *E2 | | | | |
| R216 | D4 | R315 | E3 | R449 | *D1 | R649 | A1 | R814 | A4 | R954 | E3 | | | | |
| R217 | E4 | R316 | E3 | R451 | *D1 | R650 | A1 | R815 | A4 | R955 | *E3 | | | | |
| R218 | E4 | R317 | E3 | R452 | *C1 | R651 | A1 | R816 | *A4 | R956 | *E3 | | | | |
| R220 | *B2 | R318 | E3 | R453 | *C1 | R652 | *B2 | R817 | A4 | R957 | *E3 | | | | |
| R221 | *C2 | R319 | E3 | R456 | *B3 | R653 | A1 | R818 | A4 | R958 | E2 | | | | |
| R222 | *B2 | R320 | E3 | R457 | *B3 | R654 | *B2 | R819 | *A4 | R959 | E2 | | | | |
| R224 | C4 | R321 | E3 | R458 | *C3 | R655 | *B2 | R820 | *A4 | | | | | | |
| R225 | C4 | R322 | *E2 | R459 | *C3 | R656 | A1 | R821 | *A4 | RB201 | *D4 | | | | |
| R226 | D4 | R323 | *F1 | R463 | *C3 | R657 | *B2 | R822 | *A4 | RB202 | D4 | | | | |
| R227 | *C2 | R324 | *F1 | R464 | *C3 | R658 | A1 | R823 | *A4 | RB203 | D4 | | | | |
| R228 | *C2 | R325 | *F1 | R466 | *B3 | R659 | *B2 | R824 | A4 | RB204 | *D4 | | | | |
| R229 | *C1 | R326 | *C2 | R467 | *B3 | R660 | *B2 | R825 | A4 | RB205 | *D4 | | | | |
| R235 | *C2 | R327 | *C2 | R468 | *A3 | R661 | A1 | R826 | A4 | RB206 | E4 | | | | |
| R236 | *C2 | R328 | *E2 | R469 | *A3 | R663 | A2 | R851 | *A4 | RB207 | E4 | | | | |
| R237 | *C2 | R329 | *E2 | R470 | *B3 | R665 | A2 | R852 | *A3 | RB208 | *E4 | | | | |
| R238 | *C2 | R330 | *E1 | R471 | *A3 | R666 | B1 | R853 | *A3 | RB209 | *E4 | | | | |
| R239 | *B2 | R331 | *E1 | R472 | *A3 | R667 | B2 | R854 | *A3 | RB210 | *E4 | | | | |
| R240 | *C2 | R332 | *E1 | R473 | *A3 | R668 | B2 | R855 | *A3 | RB211 | C4 | | | | |
| R241 | *C2 | R333 | *E1 | R474 | *A3 | R669 | B2 | R856 | *A4 | RB212 | C4 | | | | |
| R242 | *C2 | R334 | *F2 | R475 | *A3 | R670 | A2 | R857 | *A4 | RB213 | D4 | | | | |
| R243 | *C2 | R335 | *F2 | R476 | *A3 | R671 | A2 | R858 | *A4 | RB214 | D4 | | | | |
| R244 | *C2 | R336 | *E2 | R477 | *A3 | R672 | *A1 | R859 | *A4 | RB215 | D4 | | | | |
| R245 | *C2 | R337 | *F2 | R478 | *B3 | R673 | *A1 | R860 | *A4 | RB216 | *D4 | | | | |
| R246 | *B2 | R338 | *F2 | R479 | *B3 | R674 | *B1 | R861 | *A3 | RB222 | E1 | | | | |
| R247 | *B2 | R339 | *F2 | R480 | *B3 | R675 | *B1 | R862 | *A3 | RB223 | E1 | | | | |
| R248 | *C2 | R340 | *F1 | R481 | *B3 | R676 | *B1 | R863 | A2 | RB224 | *D3 | | | | |
| R249 | *C2 | R341 | *F2 | R482 | *B3 | R677 | *A1 | R864 | A2 | RB225 | *D3 | | | | |
| R250 | *C2 | R342 | *F1 | R483 | *B3 | R683 | B1 | R865 | A2 | RB226 | *D3 | | | | |

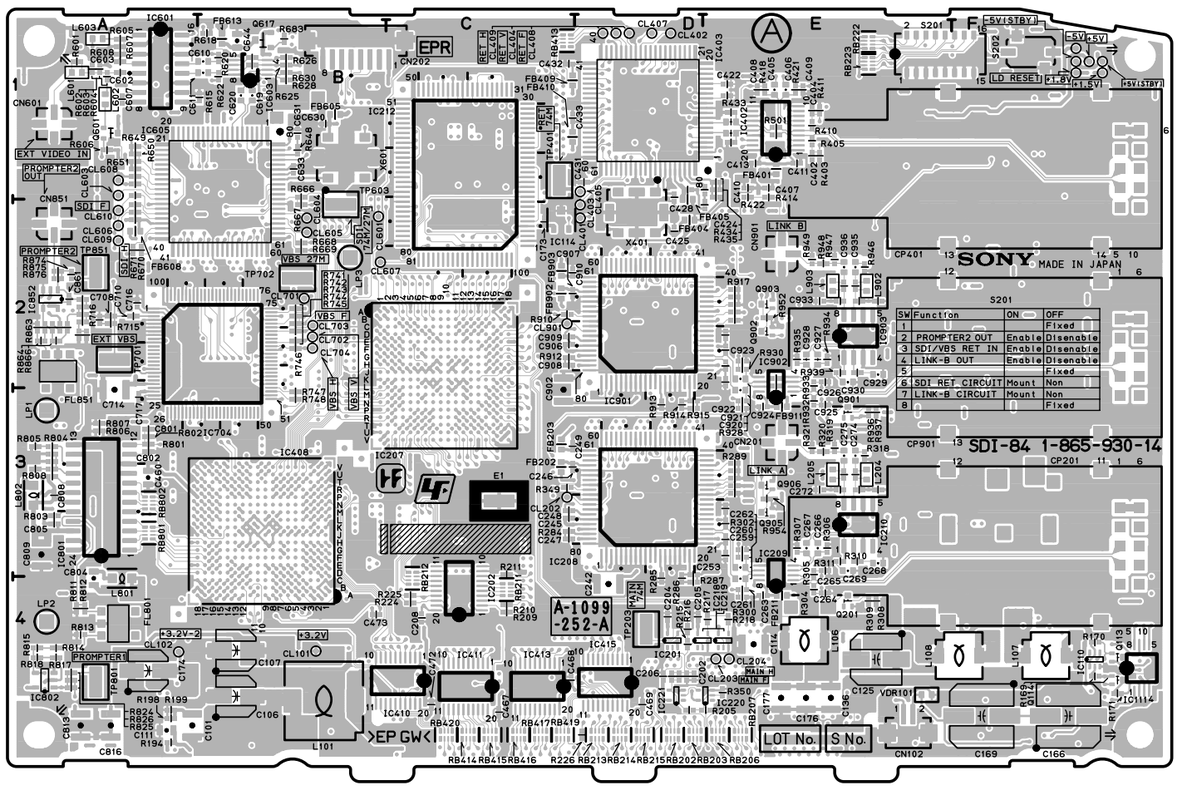SDI-84 (1-865-930-15)

| | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| C101 | A4 | C221 | *B3 | C424 | *D1 | C644 | B1 | C935 | E2 | FB215 | *E3 | IC601 | A1 | Q201 | E4 |
| C102 | *A4 | C222 | *C3 | C425 | D1 | C645 | *B2 | C936 | E2 | FB216 | *E3 | IC602 | *B1 | Q202 | *E1 |
| C103 | *A4 | C223 | *C3 | C426 | D1 | C646 | *B2 | C937 | *E3 | FB401 | E1 | IC603 | B1 | Q203 | *E1 |
| C104 | *A4 | C224 | *C2 | C427 | D1 | C701 | *B2 | C938 | *E3 | FB402 | *D1 | IC604 | *B1 | Q204 | *F1 |
| C105 | *B4 | C225 | *C2 | C428 | D1 | C702 | *A2 | C939 | *E3 | FB403 | *D1 | IC605 | B1 | Q205 | *F1 |
| C106 | B4 | C226 | *C2 | C429 | *D1 | C703 | *A2 | C940 | *E3 | FB404 | D1 | IC606 | *A1 | Q206 | *F1 |
| C107 | B4 | C227 | *C2 | C430 | *D1 | C704 | *A2 | | | FB406 | *D1 | IC607 | *B2 | Q207 | *F1 |
| C108 | *A4 | C228 | *C2 | C431 | *D1 | C707 | *A2 | CL101 | B4 | FB407 | *D1 | IC701 | *B2 | Q208 | *F2 |
| C109 | *A4 | C229 | *B2 | C432 | *D1 | C708 | A2 | CL102 | A4 | FB408 | *D1 | IC702 | *A2 | Q401 | *D1 |
| C110 | *A4 | C230 | *B3 | C433 | *D1 | C710 | A2 | CL103 | F1 | FB409 | *D1 | IC703 | *A2 | Q402 | E2 |
| C111 | A4 | C231 | *C2 | C436 | *C1 | C711 | *A2 | CL104 | F1 | FB410 | *D1 | IC704 | B2 | Q403 | E2 |
| C112 | *B4 | C232 | *C2 | C437 | *C1 | C712 | *A2 | CL105 | F1 | FB411 | D1 | IC801 | A3 | Q404 | *D1 |
| C114 | E4 | C233 | *C2 | C438 | *C4 | C713 | *A2 | CL106 | F1 | FB601 | *A1 | IC802 | A4 | Q405 | *E1 |
| C115 | *E4 | C234 | *C2 | C439 | *B4 | C714 | A3 | CL107 | F1 | FB602 | *B1 | IC851 | *A3 | Q406 | *D1 |
| C116 | *E4 | C235 | *C3 | C441 | *C3 | C715 | *A2 | CL108 | F1 | FB603 | *B1 | IC852 | A2 | Q407 | *E1 |
| C117 | *E2 | C236 | *C2 | C443 | *B3 | C716 | A2 | CL202 | D3 | FB604 | *B1 | IC901 | D2 | Q408 | *E1 |
| C118 | *E2 | C237 | *C2 | C444 | *B4 | C717 | A3 | CL203 | E4 | FB605 | B1 | IC902 | E2 | Q409 | *E1 |
| C119 | *E2 | C238 | *C3 | C445 | *B3 | C718 | *A2 | CL204 | E4 | FB607 | *B2 | IC903 | E2 | Q410 | *E1 |
| C120 | *E3 | C239 | *C3 | C446 | *B3 | C719 | *A2 | CL401 | D1 | FB608 | A2 | IC904 | *D2 | Q411 | *E1 |
| C121 | *E2 | C240 | *C3 | C447 | *B3 | C721 | *B3 | CL402 | D1 | FB609 | *B2 | IC905 | *E2 | Q412 | *E1 |
| C122 | *E2 | C241 | C3 | C448 | *A3 | C723 | *A2 | CL403 | D1 | FB610 | *A2 | IC906 | *E2 | Q601 | A1 |
| C123 | *E3 | C242 | D3 | C449 | *A4 | C724 | *A3 | CL404 | C1 | FB611 | *B2 | IC907 | *E2 | Q602 | *A1 |
| C124 | *E2 | C243 | D3 | C450 | *B4 | C725 | *B2 | CL405 | D1 | FB612 | *B1 | | | Q603 | *B1 |
| C125 | E4 | C244 | *D3 | C451 | *B4 | C726 | *B2 | CL407 | D1 | FB613 | B1 | JC101 | *D4 | Q604 | *B1 |
| C126 | *F3 | C245 | D3 | C452 | *B3 | C727 | *B3 | CL408 | D1 | FB901 | D2 | | | Q605 | *B1 |
| C127 | *F2 | C246 | *D3 | C453 | *B3 | C728 | *B2 | CL409 | C1 | FB902 | *D2 | L101 | B4 | Q606 | *B1 |
| C128 | *F2 | C247 | D3 | C454 | *B3 | C801 | A3 | CL601 | B2 | FB903 | *D2 | L102 | *E4 | Q607 | *A1 |
| C129 | *F2 | C248 | D3 | C455 | *B3 | C802 | A3 | CL603 | A1 | FB904 | *D2 | L103 | *E4 | Q608 | *A1 |
| C130 | *F2 | C249 | *D3 | C456 | *B3 | C803 | *A4 | CL604 | B2 | FB905 | *D2 | L104 | *E4 | Q609 | *A1 |
| C131 | *F2 | C250 | *D3 | C457 | *B4 | C804 | A4 | CL605 | B2 | FB906 | *D2 | L105 | *E4 | Q610 | *B1 |
| C132 | *E3 | C251 | *D3 | C458 | *B4 | C805 | A3 | CL606 | A2 | FB907 | *D2 | L106 | E4 | Q611 | *B1 |
| C133 | *F2 | C252 | *D3 | C459 | *B3 | C806 | A3 | CL607 | B2 | FB908 | *D2 | L107 | F4 | Q612 | *B1 |
| C134 | *F3 | C253 | *D3 | C460 | A3 | C807 | A3 | CL608 | A1 | FB910 | *E2 | L108 | F4 | Q613 | *B1 |
| C135 | *F2 | C254 | *D3 | C461 | *A3 | C808 | A3 | CL609 | A2 | FB911 | E3 | L201 | *B2 | Q617 | B1 |
| C136 | E4 | C255 | *D3 | C462 | *B3 | C809 | A3 | CL610 | A2 | FB912 | *E2 | L202 | *C3 | Q901 | E3 |
| C137 | *F3 | C256 | *D3 | C463 | *B3 | C810 | *A4 | CL701 | B2 | FB913 | *E2 | L203 | *E3 | Q902 | E2 |
| C138 | *F3 | C257 | *D3 | C464 | *B3 | C811 | *A4 | CL702 | B2 | FB914 | C2 | L204 | E3 | Q903 | E2 |
| C141 | *F3 | C258 | *D3 | C465 | *B3 | C812 | *A4 | CL703 | B2 | FB915 | *E2 | L205 | E3 | Q904 | *E2 |
| C142 | *F4 | C259 | E3 | C466 | *B4 | C813 | A4 | CL704 | B2 | FB916 | *E2 | L206 | *E1 | Q905 | E3 |
| C143 | *F4 | C260 | E3 | C467 | C4 | C814 | *A4 | CL901 | D2 | | | L207 | *E1 | Q906 | E3 |
| C144 | *F4 | C261 | E4 | C468 | C4 | C815 | *A4 | | | FL801 | A4 | L208 | *F1 | Q907 | *E3 |
| C145 | *F4 | C262 | E3 | C469 | D4 | C816 | A4 | CN101 | *D4 | FL851 | A2 | L401 | *F1 | Q908 | *E3 |
| C146 | *F4 | C263 | E4 | C470 | *C4 | C851 | *A3 | CN102 | E4 | | | L402 | *B3 | Q909 | *E3 |
| C147 | *F4 | C264 | E4 | C471 | *C4 | C852 | *A3 | CN201 | E3 | IC101 | *A4 | L403 | *A3 | | |
| C148 | *F4 | C265 | E3 | C472 | C4 | C853 | *A3 | CN202 | B1 | IC102 | *E2 | L404 | *B4 | R101 | *A4 |
| C149 | *F3 | C266 | E3 | C473 | B4 | C854 | *A3 | CN601 | A1 | IC103 | *F2 | L601 | A1 | R102 | *A4 |
| C150 | *F3 | C267 | E3 | C474 | *C4 | C855 | *A3 | CN851 | A2 | IC104 | *F2 | L602 | A1 | R103 | *A4 |
| C151 | *E3 | C268 | E3 | C475 | *E2 | C856 | *A3 | CN901 | E2 | IC105 | *F4 | L603 | A1 | R104 | *A4 |
| C152 | *F3 | C269 | E3 | C476 | *C1 | C857 | *A3 | | | IC106 | *F3 | L604 | *A1 | R105 | *A4 |
| C155 | *F3 | C270 | *F3 | C477 | *D1 | C858 | *A4 | CP201 | E3 | IC107 | *E3 | L605 | *A1 | R106 | *A4 |
| C156 | *F4 | C271 | *E3 | C478 | *D1 | C859 | *A4 | CP401 | E1 | IC109 | *F4 | L702 | *A3 | R107 | *A4 |
| C157 | *F4 | C272 | E3 | C602 | A1 | C860 | A2 | CP901 | E2 | IC110 | F4 | L703 | *A2 | R108 | *A4 |
| C158 | *E4 | C273 | E3 | C603 | A1 | C861 | A2 | | | IC111 | F4 | L704 | *A2 | R109 | *A4 |
| C159 | *F4 | C274 | E3 | C604 | *A1 | C862 | A2 | D101 | *E3 | IC112 | *F4 | L705 | *A2 | R110 | *A4 |
| C160 | *F4 | C275 | E3 | C605 | *A1 | C863 | *A2 | D102 | *E2 | IC113 | *F4 | L706 | *B2 | R111 | *A4 |
| C161 | *E4 | C276 | *E2 | C606 | *A1 | C864 | *A2 | D103 | *E3 | IC114 | C2 | L707 | *B2 | R112 | *A4 |
| C162 | *F4 | C277 | *E1 | C607 | A1 | C865 | *A2 | D104 | *E4 | IC201 | D4 | L801 | A4 | R113 | *A4 |
| C164 | *F3 | C278 | *E1 | C608 | *A1 | C866 | *A2 | D105 | *F2 | IC202 | C4 | L802 | A3 | R114 | *E2 |
| C165 | *F3 | C279 | *E2 | C609 | *A1 | C901 | C2 | D106 | *F2 | IC204 | *C1 | L803 | *A4 | R115 | *E2 |
| C166 | F4 | C280 | *E1 | C610 | B1 | C902 | D3 | D107 | *F2 | IC205 | *C1 | L804 | *A4 | R116 | *E2 |
| C167 | *F4 | C281 | *F1 | C611 | B1 | C903 | *C2 | D108 | *F2 | IC206 | *C2 | L851 | *A3 | R117 | *E2 |
| C168 | *F4 | C282 | *F1 | C612 | *B1 | C904 | D2 | D109 | *F2 | IC207 | C2 | L852 | *A4 | R118 | *E2 |
| C169 | F4 | C283 | *F2 | C613 | *B1 | C905 | *D2 | D110 | *F2 | IC208 | D3 | L853 | *A2 | R119 | *E2 |
| C170 | *F4 | C284 | *F1 | C614 | *B1 | C906 | D2 | D111 | *F4 | IC209 | E3 | L854 | *A2 | R120 | *E2 |
| C171 | *F4 | C285 | *F2 | C615 | *B1 | C907 | *D2 | D112 | *E4 | IC210 | E3 | L901 | *F2 | R121 | *E3 |
| C172 | *F4 | C286 | *F1 | C616 | *B1 | C908 | D2 | D113 | *E4 | IC211 | *C1 | L902 | E2 | R122 | *E3 |
| C173 | C2 | C287 | *F1 | C617 | *B1 | C909 | D2 | D114 | *E3 | IC212 | C1 | L903 | E2 | R123 | *E3 |
| C174 | A4 | C288 | *F1 | C618 | *B1 | C910 | *D2 | D701 | *A2 | IC214 | *E1 | | | R124 | *E3 |
| C175 | *E4 | C289 | *C3 | C619 | B1 | C911 | *D2 | D702 | *A3 | IC215 | *F1 | LP1 | A3 | R125 | *E3 |
| C176 | E4 | C401 | *F1 | C620 | B1 | C912 | *D2 | | | IC216 | *F1 | LP2 | A4 | R126 | *E3 |
| C177 | E4 | C402 | E1 | C621 | *B1 | C913 | *D2 | E1 | C3 | IC217 | *C3 | LP3 | B2 | R127 | *E3 |
| C178 | *E4 | C403 | *D1 | C622 | *B1 | C914 | *D2 | E2 | *C3 | IC218 | D4 | | | R128 | *E3 |
| C179 | *E4 | C404 | E1 | C623 | *B1 | C915 | *D2 | | | IC219 | E4 | Q101 | *B4 | R129 | *E3 |
| C180 | *E4 | C405 | E1 | C624 | *B1 | C916 | *D2 | FB101 | *F3 | IC220 | E4 | Q102 | *A4 | R130 | *F2 |
| C201 | D4 | C406 | E1 | C625 | *B1 | C917 | *D2 | FB102 | *F3 | IC221 | D4 | Q103 | *B4 | R131 | *F2 |
| C202 | D4 | C407 | E1 | C626 | *B1 | C918 | *D2 | FB103 | *E3 | IC401 | *D1 | Q104 | *A4 | R132 | *F2 |
| C203 | *C1 | C408 | E1 | C627 | *B1 | C919 | *D2 | FB104 | *E3 | IC402 | E1 | Q105 | *E3 | R133 | *F2 |
| C204 | D4 | C409 | E1 | C628 | *B1 | C920 | E2 | FB105 | *E3 | IC403 | D1 | Q106 | *E2 | R134 | *F2 |
| C205 | D4 | C410 | E1 | C629 | *B1 | C921 | E2 | FB106 | *F3 | IC404 | *D1 | Q107 | *E3 | R135 | *F2 |
| C206 | D4 | C411 | E1 | C630 | B1 | C922 | E3 | FB201 | D3 | IC405 | *C1 | Q108 | *E3 | R136 | *F2 |
| C208 | C4 | C412 | *E1 | C631 | B1 | C923 | E2 | FB202 | *D3 | IC407 | *C3 | Q109 | *E3 | R137 | *F2 |
| C209 | *C2 | C413 | E1 | C632 | *B1 | C924 | E3 | FB203 | *D3 | IC408 | B3 | Q110 | *E3 | R138 | *F3 |
| C210 | *C1 | C414 | *C1 | C633 | B1 | C925 | E3 | FB204 | *D3 | IC409 | *B4 | Q111 | *F3 | R139 | *F3 |
| C211 | *C1 | C415 | D1 | C634 | A2 | C926 | E2 | FB205 | *D3 | IC410 | C4 | Q112 | *F2 | R141 | *F4 |
| C212 | *C1 | C416 | E1 | C635 | *B2 | C927 | E2 | FB206 | *D3 | IC411 | C4 | Q113 | F4 | R142 | *F4 |
| C213 | *C1 | C417 | E1 | C636 | *B2 | C928 | E2 | FB207 | *D3 | IC412 | *C4 | Q114 | F4 | R143 | *F4 |
| C214 | *C1 | C418 | E1 | C637 | *A2 | C929 | E2 | FB208 | *D3 | IC413 | C4 | Q115 | *F4 | R144 | *F4 |
| C215 | *C1 | C419 | D1 | C638 | *B2 | C930 | E2 | FB210 | *D3 | IC414 | *C4 | Q116 | *F4 | R145 | *F4 |
| C216 | *C1 | C420 | *D1 | C639 | *A1 | C931 | *F2 | FB211 | E4 | IC415 | D4 | Q117 | *F4 | R146 | *F4 |
| C218 | *C2 | C421 | D1 | C640 | *B1 | C932 | *E2 | FB212 | *E3 | IC416 | *C4 | Q118 | *F4 | R147 | *F4 |
| C219 | *B2 | C422 | D1 | C641 | *A1 | C933 | E2 | FB213 | *E3 | IC417 | *C4 | Q119 | *B4 | R148 | *F4 |
| C220 | *B3 | C423 | *D1 | C642 | *B1 | C934 | E2 | FB214 | C3 | IC418 | *C4 | Q120 | *E4 | R149 | *F3 |

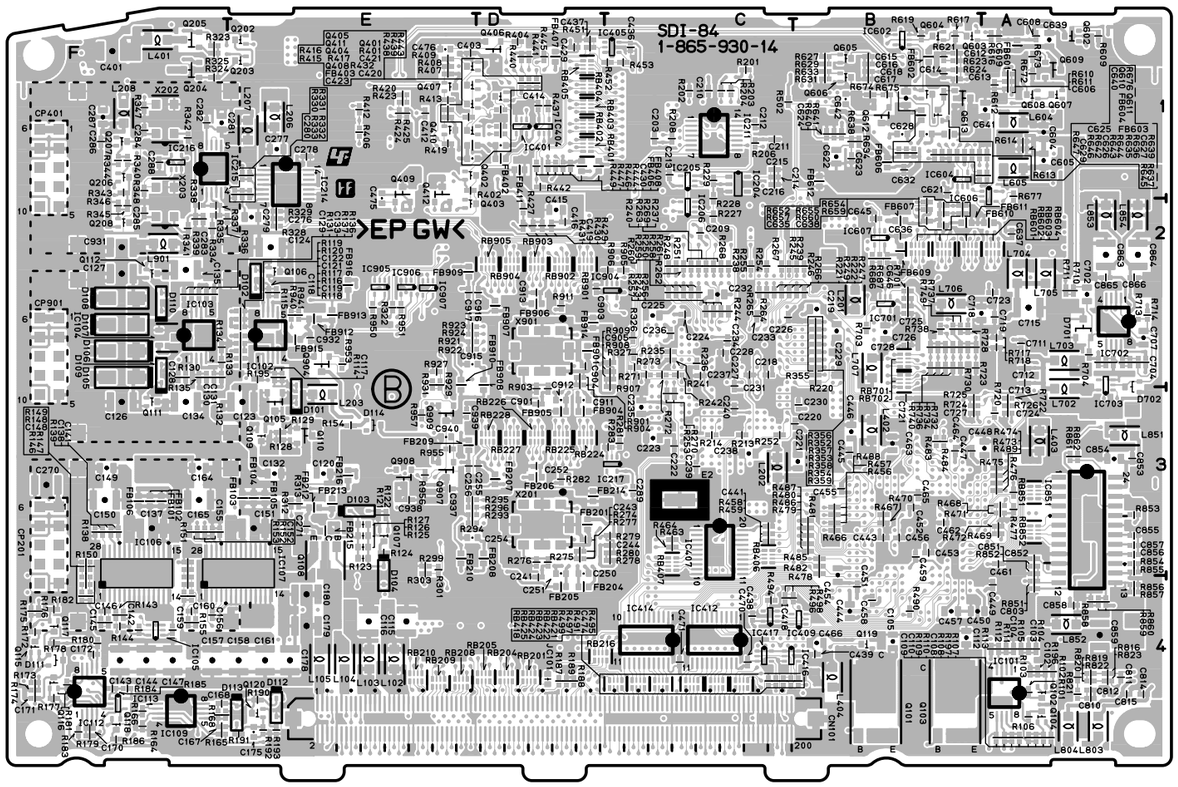


**SDI-84** -A SIDE-
SUFFIX: -15




**SDI-84** -B SIDE-
SUFFIX: -15

| | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| R150 | *F3 | R252 | *C3 | R344 | *F1 | R484 | *B3 | R684 | B1 | R866 | A2 | RB226 | D3 | | |
| R151 | *F3 | R253 | *C3 | R345 | *F2 | R485 | *B3 | R685 | B1 | R867 | A2 | RB227 | D3 | | |
| R152 | *F3 | R254 | *C2 | R346 | *F2 | R486 | *B3 | R686 | *B2 | R868 | A2 | RB228 | D3 | | |
| R153 | *F3 | R255 | *C2 | R347 | *F1 | R487 | *B3 | R687 | *B2 | R869 | A2 | RB401 | D1 | | |
| R154 | *E3 | R256 | *C2 | R348 | *F1 | R488 | *B3 | R701 | *B2 | R870 | A2 | RB402 | D1 | | |
| R155 | *F4 | R257 | *C2 | R349 | D3 | R489 | *A3 | R702 | *B2 | R871 | A2 | RB403 | D1 | | |
| R156 | *F4 | R258 | *C2 | R350 | E4 | R490 | *B4 | R703 | *B2 | R872 | A2 | RB404 | D1 | | |
| R157 | *F4 | R259 | *C2 | R351 | D4 | R491 | *C4 | R704 | *A2 | R873 | A2 | RB405 | D1 | | |
| R158 | *F4 | R260 | *C2 | R352 | *B2 | R494 | *C4 | R705 | *A2 | R874 | A2 | RB406 | *C3 | | |
| R159 | *F3 | R261 | *C2 | R353 | *B2 | R495 | *B4 | R706 | *A2 | R875 | A2 | RB407 | *C3 | | |
| R160 | *F3 | R262 | *C2 | R354 | *B2 | R496 | *C4 | R707 | *A2 | R876 | A2 | RB413 | C1 | | |
| R164 | *F4 | R263 | *C2 | R355 | *B2 | R497 | *C4 | R708 | *A2 | R901 | C2 | RB414 | C4 | | |
| R165 | *F4 | R264 | *C2 | R356 | *B2 | R498 | *B4 | R709 | *A2 | R902 | C2 | RB415 | C4 | | |
| R166 | *F4 | R265 | *C2 | R357 | *B2 | R499 | *C4 | R710 | *A2 | R903 | C2 | RB416 | C4 | | |
| R167 | *F4 | R266 | *C2 | R358 | *B2 | R500 | E1 | R711 | *A2 | R904 | D2 | RB417 | C4 | | |
| R168 | *F4 | R267 | *C2 | R359 | *B2 | R501 | E1 | R713 | *A2 | R905 | *C2 | RB418 | *C4 | | |
| R169 | F4 | R268 | *C2 | R401 | *D1 | R502 | *C1 | R714 | *A2 | R906 | *D2 | RB419 | C4 | | |
| R170 | F4 | R269 | *C2 | R402 | E2 | R601 | A1 | R715 | A2 | R907 | *D2 | RB420 | C4 | | |
| R171 | F4 | R270 | *C3 | R403 | E1 | R602 | A1 | R716 | A2 | R908 | *D2 | RB421 | *C4 | | |
| R172 | *F4 | R271 | *C2 | R404 | *C1 | R603 | A1 | R717 | *A2 | R909 | *D2 | RB422 | *C4 | | |
| R173 | *F4 | R272 | *C2 | R405 | E1 | R604 | A1 | R718 | *A2 | R910 | D2 | RB423 | *C4 | | |
| R174 | *F4 | R273 | *C2 | R406 | *E1 | R605 | A1 | R720 | *A3 | R911 | *D2 | RB424 | *C4 | | |
| R175 | *F4 | R274 | C3 | R407 | *E1 | R606 | A1 | R721 | *B2 | R912 | D2 | RB425 | *C4 | | |
| R176 | *F4 | R275 | C3 | R408 | *E1 | R607 | A1 | R722 | *A3 | R913 | *D2 | RB601 | *B2 | | |
| R177 | *F4 | R276 | C3 | R409 | *E1 | R608 | A1 | R723 | *B2 | R914 | *D2 | RB602 | *B2 | | |
| R178 | *F4 | R277 | D3 | R410 | E1 | R609 | *A1 | R724 | *B3 | R915 | *D2 | RB603 | *B2 | | |
| R179 | *F4 | R278 | *D3 | R411 | E1 | R610 | *A1 | R725 | *B3 | R916 | *D2 | RB604 | *A2 | | |
| R180 | *F4 | R279 | *D3 | R412 | *E1 | R611 | *A1 | R726 | *A3 | R917 | *D2 | RB701 | *B2 | | |
| R181 | *F4 | R280 | *D3 | R413 | *E1 | R612 | *A1 | R727 | *B2 | R918 | E2 | RB702 | *B2 | | |
| R182 | *F4 | R281 | *C3 | R414 | E1 | R613 | *A1 | R728 | *B2 | R919 | E2 | RB801 | A3 | | |
| R183 | *F4 | R282 | *D3 | R415 | *E1 | R614 | *A1 | R729 | *B2 | R920 | *D2 | RB802 | A3 | | |
| R184 | *F4 | R283 | *D3 | R416 | *E1 | R615 | B1 | R730 | *B2 | R921 | *D2 | RB851 | *A3 | | |
| R185 | *F4 | R284 | D3 | R417 | *E1 | R616 | *A1 | R731 | *B2 | R922 | E2 | RB852 | *A3 | | |
| R186 | *F4 | R285 | *D3 | R418 | E1 | R617 | *B1 | R732 | *B2 | R923 | *E2 | RB901 | D2 | | |
| R187 | *D4 | R286 | *D3 | R419 | *E1 | R618 | B1 | R733 | *B2 | R924 | *D2 | RB902 | D2 | | |
| R188 | *D4 | R287 | *D3 | R420 | *E1 | R619 | *B1 | R734 | *B2 | R925 | D2 | RB903 | D2 | | |
| R189 | *D4 | R288 | *D3 | R421 | E1 | R620 | B1 | R735 | *B2 | R926 | D2 | RB904 | D2 | | |
| R190 | *E4 | R289 | *D3 | R422 | E1 | R621 | *B1 | R736 | *B2 | R927 | *E2 | RB905 | D2 | | |
| R191 | *E4 | R290 | D3 | R423 | *E1 | R622 | B1 | R737 | *B2 | R928 | E2 | | | | |
| R192 | *E4 | R291 | D3 | R424 | *E1 | R623 | *B1 | R738 | *B2 | R929 | *E2 | S201 | E1 | | |
| R193 | *E4 | R292 | *D3 | R425 | *E1 | R624 | *B1 | R739 | *B2 | R930 | E2 | S202 | F1 | | |
| R194 | A4 | R293 | *D3 | R426 | E1 | R625 | B1 | R740 | *B2 | R931 | *E3 | | | | |
| R195 | *E2 | R294 | D3 | R427 | D1 | R626 | B1 | R741 | B2 | R932 | E3 | TP203 | D4 | | |
| R196 | *A4 | R295 | *D3 | R428 | E1 | R627 | *B1 | R742 | B2 | R933 | E2 | TP401 | C1 | | |
| R197 | *A4 | R296 | *D3 | R429 | D1 | R628 | B1 | R743 | B2 | R934 | E2 | TP603 | B2 | | |
| R198 | A4 | R297 | D3 | R430 | E1 | R629 | *B1 | R744 | B2 | R935 | E2 | TP701 | A2 | | |
| R199 | A4 | R298 | D3 | R431 | D1 | R630 | B1 | R745 | B2 | R936 | E3 | TP702 | B2 | | |
| R201 | *C1 | R299 | *E3 | R432 | D1 | R631 | *B1 | R746 | B2 | R937 | E3 | TP801 | A4 | | |
| R202 | *C1 | R300 | E3 | R433 | *D1 | R633 | *B1 | R747 | B3 | R938 | E2 | TP851 | A2 | | |
| R203 | *C1 | R301 | *E3 | R434 | *D1 | R634 | *B1 | R748 | B3 | R939 | E2 | | | | |
| R204 | *C1 | R302 | E3 | R435 | *D1 | R635 | *B1 | R749 | *B2 | R940 | *E2 | VDR101 | E4 | | |
| R205 | E4 | R303 | *E4 | R436 | D1 | R636 | *B1 | R801 | A3 | R941 | *E2 | | | | |
| R206 | *C1 | R304 | E4 | R437 | *D1 | R637 | *A1 | R802 | A3 | R942 | E2 | X201 | C3 | | |
| R207 | D4 | R305 | E3 | R438 | *D1 | R638 | *B1 | R803 | A3 | R943 | E2 | X202 | *F1 | | |
| R208 | *C1 | R306 | E3 | R439 | *D1 | R639 | *A1 | R804 | A3 | R944 | E2 | X203 | *F2 | | |
| R209 | C4 | R307 | E3 | R440 | *D1 | R640 | *B1 | R805 | A3 | R945 | E2 | X401 | D1 | | |
| R210 | C4 | R308 | E4 | R441 | *D1 | R641 | *B1 | R806 | A3 | R946 | E2 | X601 | B1 | | |
| R211 | C3 | R309 | E4 | R442 | D1 | R642 | *B1 | R807 | A3 | R947 | E2 | X901 | C2 | | |
| R212 | D4 | R310 | E3 | R443 | *D1 | R643 | *B1 | R808 | A3 | R948 | E2 | | | | |
| R213 | *C3 | R311 | E3 | R444 | D1 | R644 | *B1 | R809 | A3 | R949 | E2 | *:B SIDE | | | |
| R214 | *C3 | R312 | *E3 | R445 | *D1 | R645 | *B1 | R810 | A3 | R950 | *E2 | | | | |
| R215 | D4 | R313 | *E3 | R446 | *D1 | R646 | *B1 | R811 | A4 | R951 | *E2 | | | | |
| R216 | D4 | R314 | E3 | R447 | *D1 | R647 | *B1 | R812 | A4 | R952 | E2 | | | | |
| R217 | E4 | R315 | E3 | R448 | *D1 | R648 | B1 | R813 | A4 | R953 | *E2 | | | | |
| R218 | E4 | R316 | E3 | R449 | D1 | R649 | A1 | R814 | A4 | R954 | E3 | | | | |
| R219 | D3 | R317 | E3 | R451 | *C1 | R650 | A1 | R815 | A4 | R955 | *E3 | | | | |
| R220 | *B2 | R318 | E3 | R452 | *C1 | R651 | A1 | R816 | *A4 | R956 | *E3 | | | | |
| R221 | *C2 | R319 | E3 | R453 | *C1 | R652 | *B2 | R817 | A4 | R957 | *E3 | | | | |
| R222 | *B2 | R320 | E3 | R456 | *B3 | R653 | A1 | R818 | A4 | R958 | E2 | | | | |
| R224 | C4 | R321 | E3 | R457 | *B3 | R654 | *B2 | R819 | *A4 | R959 | E2 | | | | |
| R225 | C4 | R322 | *E2 | R458 | *C3 | R655 | *B2 | R820 | *A4 | R960 | D2 | | | | |
| R226 | D4 | R323 | *F1 | R459 | *C3 | R656 | A1 | R821 | *A4 | | | | | | |
| R227 | *C2 | R324 | *F1 | R463 | *C3 | R657 | *B2 | R822 | *A4 | RB201 | *D4 | | | | |
| R228 | *C2 | R325 | *F1 | R464 | *C3 | R658 | A1 | R823 | *A4 | RB202 | D4 | | | | |
| R229 | *C1 | R326 | *C2 | R466 | *B3 | R659 | *B2 | R824 | A4 | RB203 | D4 | | | | |
| R235 | *C2 | R327 | *C2 | R467 | *B3 | R660 | *B2 | R825 | A4 | RB204 | *D4 | | | | |
| R236 | *C2 | R328 | *E2 | R468 | *A3 | R661 | A1 | R826 | A4 | RB205 | *D4 | | | | |
| R237 | *C2 | R329 | *E2 | R469 | *A3 | R663 | A2 | R851 | *A4 | RB206 | E4 | | | | |
| R238 | *C2 | R330 | *E1 | R470 | *B3 | R665 | A2 | R852 | *A3 | RB207 | E4 | | | | |
| R239 | *B2 | R331 | *E1 | R471 | *A3 | R666 | B1 | R853 | *A3 | RB208 | *E4 | | | | |
| R240 | *C2 | R332 | *E1 | R472 | *A3 | R667 | B2 | R854 | *A3 | RB209 | *E4 | | | | |
| R241 | *C2 | R333 | *E1 | R473 | *A3 | R668 | B2 | R855 | *A3 | RB210 | *E4 | | | | |
| R242 | *C2 | R334 | *F2 | R474 | *A3 | R669 | B2 | R856 | *A4 | RB211 | C4 | | | | |
| R243 | *C2 | R335 | *F2 | R475 | *A3 | R670 | A2 | R857 | *A4 | RB212 | C4 | | | | |
| R244 | *C2 | R336 | *E2 | R476 | *A3 | R671 | A2 | R858 | *A4 | RB213 | D4 | | | | |
| R245 | *C2 | R337 | *F2 | R477 | *A3 | R672 | *A1 | R859 | *A4 | RB214 | D4 | | | | |
| R246 | *B2 | R338 | *F2 | R478 | *B3 | R673 | *A1 | R860 | *A4 | RB215 | D4 | | | | |
| R247 | *B2 | R339 | *F2 | R479 | *B3 | R674 | *B1 | R861 | *A3 | RB216 | *D4 | | | | |
| R248 | *C2 | R340 | *F1 | R480 | *B3 | R675 | *B1 | R862 | *A3 | RB222 | E1 | | | | |
| R249 | *C2 | R341 | *F2 | R481 | *B3 | R676 | *B1 | R863 | A2 | RB223 | E1 | | | | |
| R250 | *C2 | R342 | *F1 | R482 | *B3 | R677 | *A1 | R864 | A2 | RB224 | D3 | | | | |
| R251 | *C2 | R343 | *F1 | R483 | *B3 | R683 | B1 | R865 | A2 | RB225 | D3 | | | | |

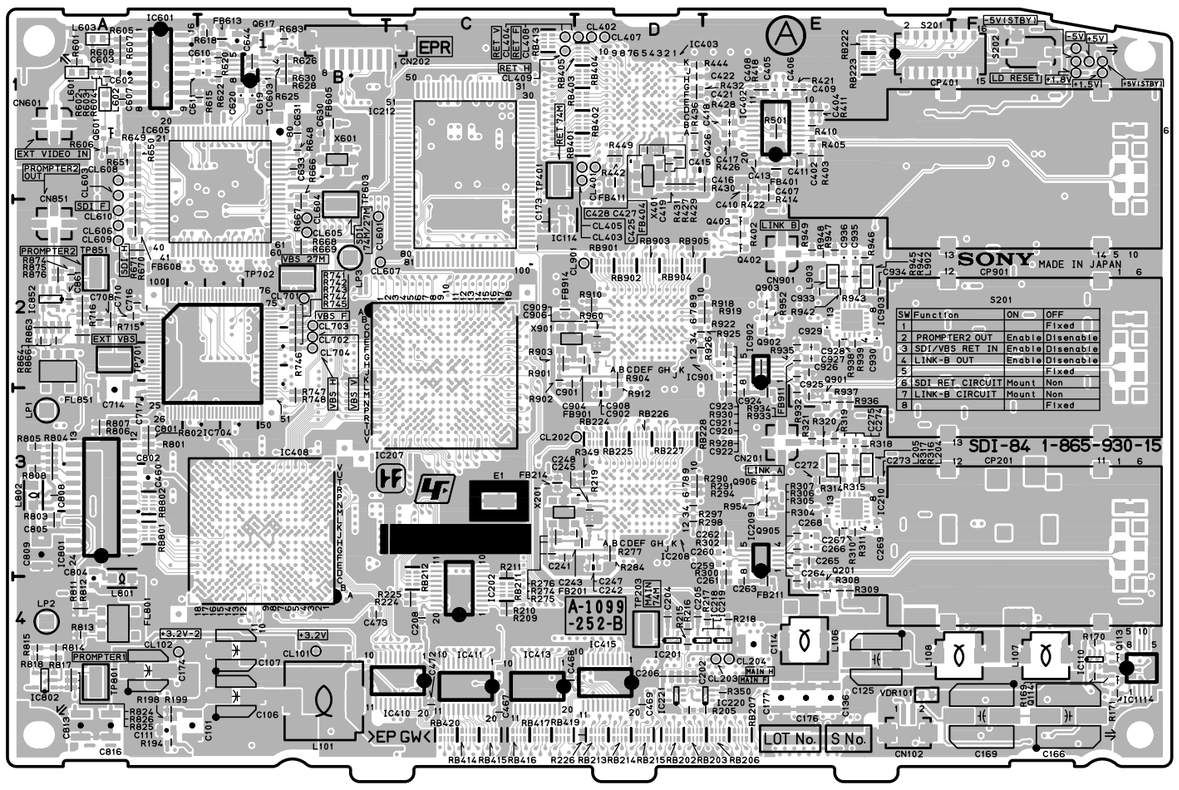SW-1233 (1-867-455-12)

| | | | | | |
|---|---|---|---|---|---|
| C1 | B1 | Q123 | D2 | S25 | A2 |
| C2 | B1 | | | S26 | C1 |
| C3 | B1 | R1 | A1 | S27 | D1 |
| C4 | C1 | R2 | C2 | S28 | C1 |
| C5 | B1 | R3 | C2 | S29 | A1 |
| C6 | C2 | R4 | A1 | S30 | B1 |
| C7 | A1 | R5 | A1 | S31 | B1 |
| C8 | A1 | R6 | A1 | | |
| C10 | A1 | R7 | C1 | *:B SIDE | |
| C14 | B1 | R8 | C1 | | |
| C100 | C1 | R9 | C1 | | |
| C101 | C2 | R10 | C1 | | |
| C102 | *C2 | R11 | D1 | | |
| C103 | *D2 | R12 | D1 | | |
| | | R13 | D1 | | |
| CN1 | A1 | R14 | D1 | | |
| CN2 | A2 | R15 | C1 | | |
| CN3 | D2 | R16 | C1 | | |
| CN4 | D2 | R17 | C1 | | |
| CN5 | D2 | R18 | C1 | | |
| CN6 | D2 | R19 | C1 | | |
| | | R20 | C1 | | |
| D1 | A1 | R21 | C1 | | |
| D2 | A1 | R22 | C1 | | |
| D3 | A1 | R23 | B1 | | |
| D4 | *C1 | R24 | B1 | | |
| D5 | *C1 | R25 | B1 | | |
| D6 | *C1 | R26 | B1 | | |
| D7 | *C1 | R27 | B1 | | |
| D8 | *D1 | R28 | C1 | | |
| D9 | *D1 | R29 | D1 | | |
| D10 | *D1 | R30 | C1 | | |
| D11 | *D1 | R31 | C1 | | |
| D12 | *A2 | R32 | D1 | | |
| D13 | *A2 | R34 | B1 | | |
| D14 | *A2 | R35 | B1 | | |
| D15 | *A2 | R36 | B1 | | |
| D16 | *A1 | R37 | B1 | | |
| D17 | *A2 | R38 | B1 | | |
| D18 | *B2 | R70 | A2 | | |
| D19 | *A2 | R100 | C1 | | |
| D20 | *A2 | R101 | C1 | | |
| D21 | *A1 | R102 | D1 | | |
| D22 | *A1 | R103 | D1 | | |
| D23 | *B1 | R104 | C1 | | |
| D24 | *B2 | R105 | D1 | | |
| D25 | *C2 | R106 | D1 | | |
| D26 | *A1 | R107 | D1 | | |
| D27 | *C2 | R108 | *C2 | | |
| D29 | *A2 | R109 | *C2 | | |
| D30 | *D2 | R110 | *C2 | | |
| D31 | *C1 | R111 | *C2 | | |
| D32 | *C2 | R112 | *D2 | | |
| | | R113 | *D2 | | |
| EN1 | C2 | R114 | *D2 | | |
| | | R115 | *D2 | | |
| IC1 | B1 | R116 | *C2 | | |
| IC2 | B1 | R117 | *C2 | | |
| IC3 | B1 | R118 | *C2 | | |
| IC4 | A1 | R119 | *C2 | | |
| | | R120 | *C2 | | |
| Q1 | B1 | R121 | *C2 | | |
| Q2 | B1 | R122 | *C2 | | |
| Q3 | B1 | R123 | *C2 | | |
| Q4 | B1 | R124 | *C2 | | |
| Q5 | B1 | R125 | *C2 | | |
| Q6 | B1 | | | | |
| Q7 | B1 | RV1 | B1 | | |
| Q8 | B1 | RV2 | B2 | | |
| Q100 | C2 | RV3 | B1 | | |
| Q101 | C2 | RV4 | B2 | | |
| Q102 | D2 | RV5 | D2 | | |
| Q103 | D2 | | | | |
| Q104 | C2 | S1 | A1 | | |
| Q105 | C2 | S2 | A2 | | |
| Q106 | C2 | S3 | C1 | | |
| Q107 | C2 | S4 | D1 | | |
| Q108 | C2 | S5 | A2 | | |
| Q109 | C2 | S6 | B2 | | |
| Q110 | D2 | S7 | A2 | | |
| Q111 | D2 | S8 | A2 | | |
| Q112 | C2 | S9 | B2 | | |
| Q113 | C2 | S10 | B2 | | |
| Q114 | D2 | S11 | C2 | | |
| Q115 | D2 | S12 | C2 | | |
| Q116 | C2 | S13 | D2 | | |
| Q117 | C2 | S14 | C1 | | |
| Q118 | C2 | S15 | C2 | | |
| Q119 | C2 | S20 | D2 | | |
| Q120 | C2 | S21 | A1 | | |
| Q121 | D2 | S22 | C2 | | |
| Q122 | D2 | S24 | C2 | | |

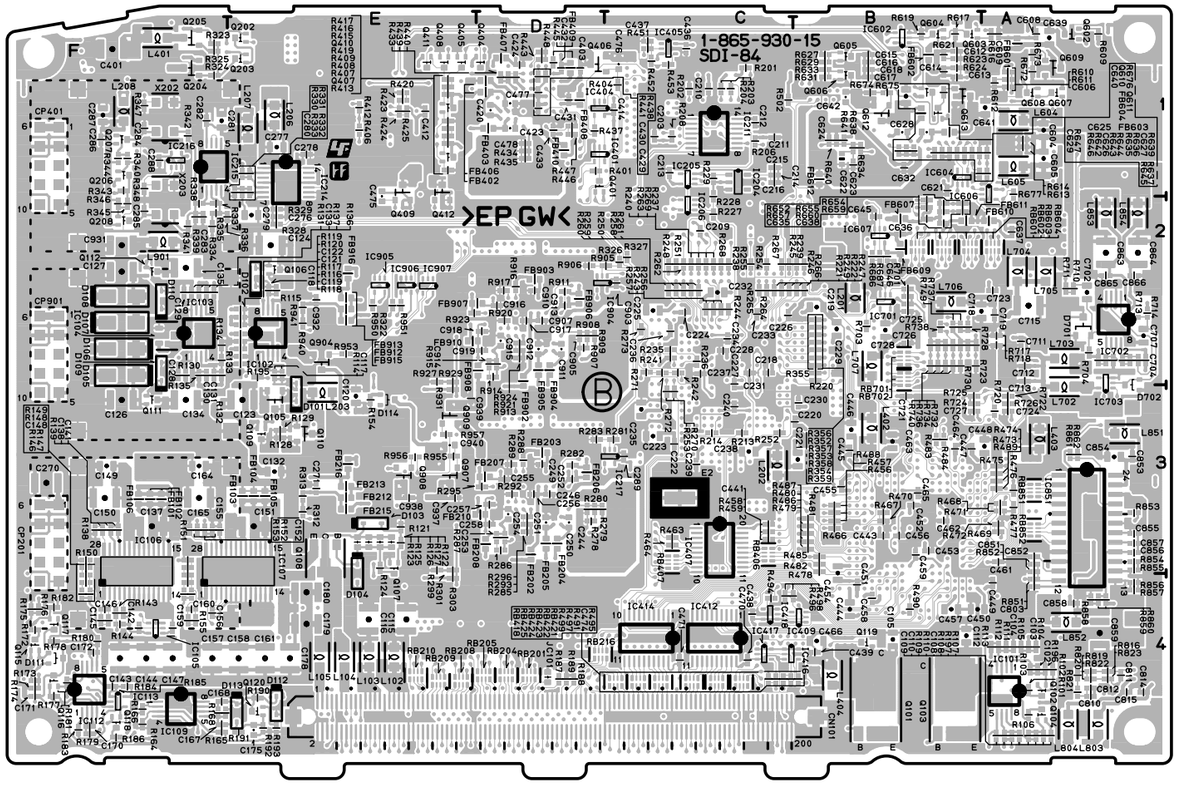


**SW-1233** -A SIDE-
SUFFIX: -12




**SW-1233** -B SIDE-
SUFFIX: -12

SW-1233 (1-867-455-13)
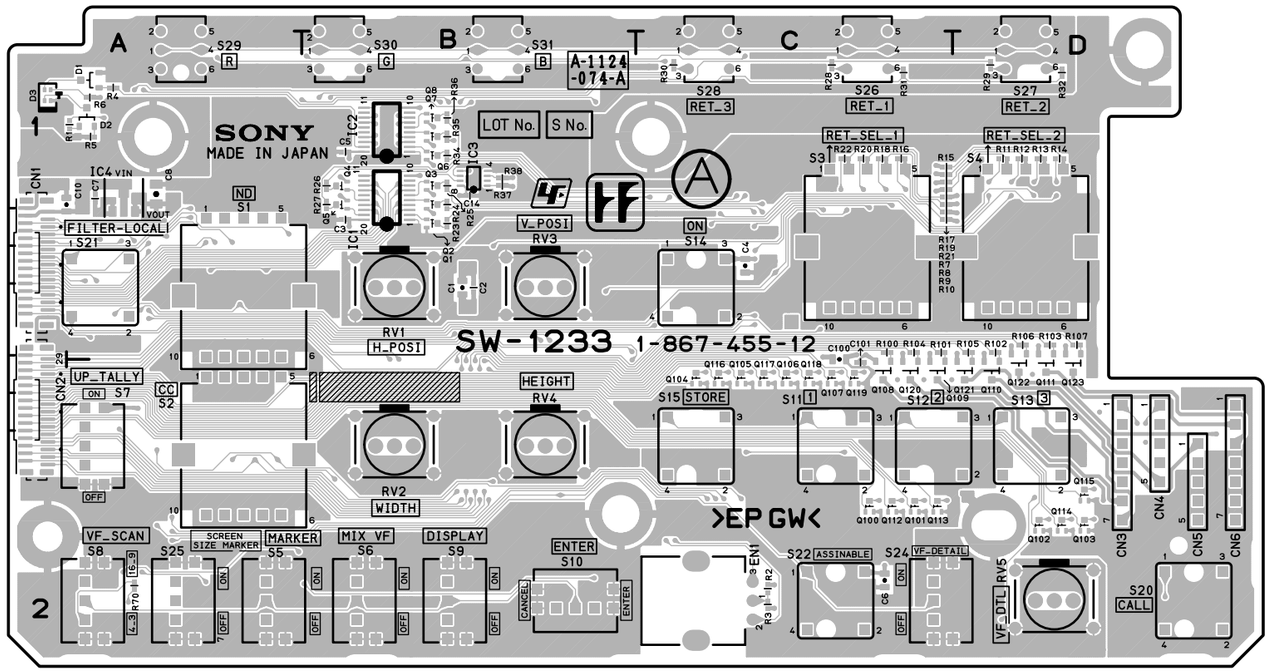
| | | | | | |
|---|---|---|---|---|---|
| C1 | B1 | Q120 | C2 | S21 | A1 |
| C2 | B1 | Q121 | D2 | S22 | C2 |
| C3 | B1 | Q122 | D2 | S24 | C2 |
| C4 | C1 | Q123 | D2 | S25 | A2 |
| C5 | B1 | | | S26 | C1 |
| C6 | C2 | R1 | A1 | S27 | D1 |
| C7 | A1 | R2 | C2 | S28 | C1 |
| C8 | A1 | R3 | C2 | S29 | A1 |
| C10 | A1 | R4 | A1 | S30 | B1 |
| C11 | C2 | R5 | A1 | S31 | B1 |
| C12 | C2 | R6 | A1 | | |
| C14 | B1 | R7 | C1 | *:B SIDE | |
| C100 | C2 | R8 | C1 | | |
| C101 | C2 | R9 | C1 | | |
| C102 | *C2 | R10 | C1 | | |
| C103 | *D2 | R11 | D1 | | |
| | | R12 | D1 | | |
| CN1 | A1 | R13 | D1 | | |
| CN2 | A2 | R14 | D1 | | |
| CN3 | D2 | R15 | C1 | | |
| CN4 | D2 | R16 | C1 | | |
| CN5 | D2 | R17 | C1 | | |
| CN6 | D2 | R18 | C1 | | |
| | | R19 | C1 | | |
| D1 | A1 | R20 | C1 | | |
| D2 | A1 | R21 | C1 | | |
| D3 | A1 | R22 | C1 | | |
| D4 | *C1 | R23 | B1 | | |
| D5 | *C1 | R24 | B1 | | |
| D6 | *C1 | R25 | B1 | | |
| D7 | *C1 | R26 | B1 | | |
| D8 | *D1 | R27 | B1 | | |
| D9 | *D1 | R28 | C1 | | |
| D10 | *D1 | R29 | D1 | | |
| D11 | *D1 | R30 | C1 | | |
| D12 | *A2 | R31 | C1 | | |
| D13 | *A2 | R32 | D1 | | |
| D14 | *A2 | R34 | B1 | | |
| D15 | *A2 | R35 | B1 | | |
| D16 | *A1 | R36 | B1 | | |
| D17 | *A2 | R37 | B1 | | |
| D18 | *B2 | R38 | B1 | | |
| D19 | *A2 | R70 | A2 | | |
| D20 | *A2 | R100 | C1 | | |
| D21 | *A1 | R101 | C1 | | |
| D22 | *A1 | R102 | D1 | | |
| D23 | *B1 | R103 | D1 | | |
| D24 | *B2 | R104 | C1 | | |
| D25 | *C2 | R105 | D1 | | |
| D26 | *A1 | R106 | D1 | | |
| D27 | *C2 | R107 | D1 | | |
| D29 | *A2 | R108 | *C2 | | |
| D30 | *D2 | R109 | *C2 | | |
| D31 | *C1 | R110 | *C2 | | |
| D32 | *C2 | R111 | *C2 | | |
| | | R112 | *D2 | | |
| EN1 | C2 | R113 | *D2 | | |
| | | R114 | *D2 | | |
| IC1 | B1 | R115 | *D2 | | |
| IC2 | B1 | R116 | *C2 | | |
| IC3 | B1 | R117 | *C2 | | |
| IC4 | A1 | R118 | *C2 | | |
| IC5 | C2 | R119 | *C2 | | |
| | | R120 | *C2 | | |
| Q1 | B1 | R121 | *C2 | | |
| Q2 | B1 | R122 | *C2 | | |
| Q3 | B1 | R123 | *C2 | | |
| Q4 | B1 | R124 | *C2 | | |
| Q5 | B1 | R125 | *C2 | | |
| Q6 | B1 | | | | |
| Q7 | B1 | RV1 | B1 | | |
| Q8 | B1 | RV2 | B2 | | |
| Q100 | C2 | RV3 | B1 | | |
| Q101 | C2 | RV4 | B2 | | |
| Q102 | D2 | RV5 | D2 | | |
| Q103 | D2 | | | | |
| Q104 | C2 | S1 | A1 | | |
| Q105 | C2 | S2 | A2 | | |
| Q106 | C2 | S3 | C1 | | |
| Q107 | C2 | S4 | D1 | | |
| Q108 | C2 | S5 | A2 | | |
| Q109 | C2 | S6 | B2 | | |
| Q110 | D2 | S7 | A2 | | |
| Q111 | D2 | S8 | A2 | | |
| Q112 | C2 | S9 | B2 | | |
| Q113 | C2 | S10 | B2 | | |
| Q114 | D2 | S11 | C2 | | |
| Q115 | D2 | S12 | C2 | | |
| Q116 | C2 | S13 | D2 | | |
| Q117 | C2 | S14 | C1 | | |
| Q118 | C2 | S15 | C2 | | |
| Q119 | C2 | S20 | D2 | | |

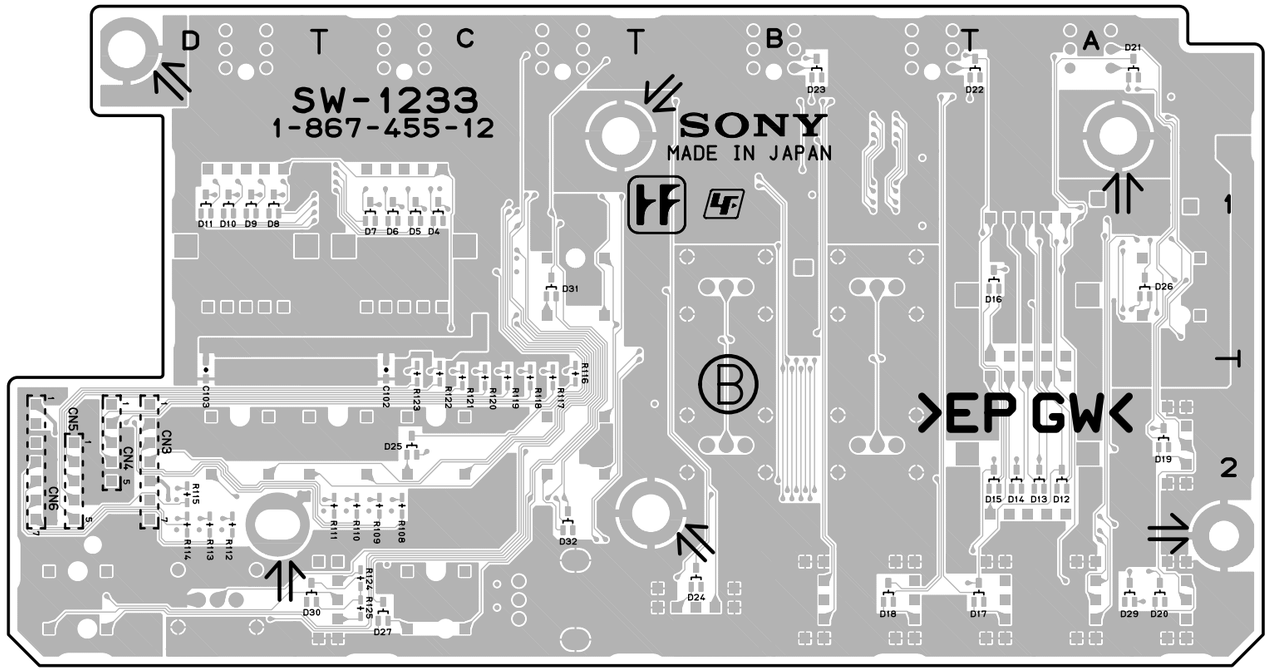


**SW-1233** -A SIDE-
SUFFIX: -13




**SW-1233** -B SIDE-
SUFFIX: -13

SW-1233 (1-867-455-31)
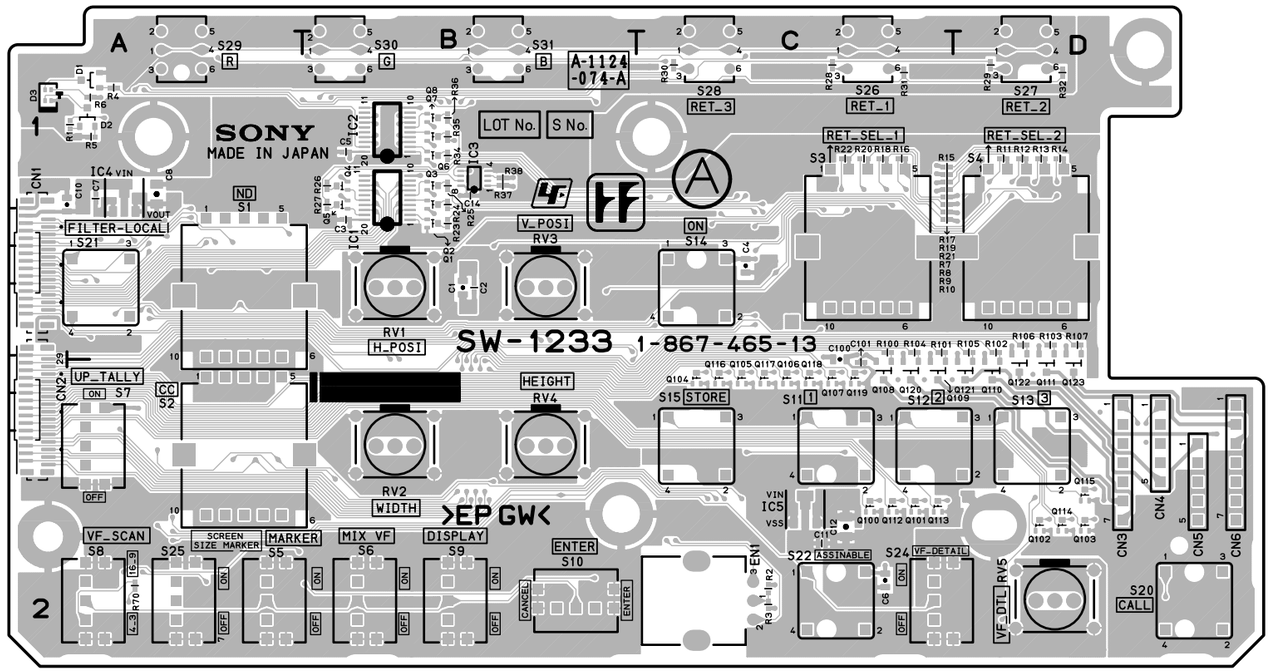
| | | | | | |
|---|---|---|---|---|---|
| C1 | B1 | Q120 | C2 | S21 | A1 |
| C2 | B1 | Q121 | D2 | S22 | C2 |
| C3 | B1 | Q122 | D2 | S24 | C2 |
| C4 | C1 | Q123 | D2 | S25 | A2 |
| C5 | B1 | | | S26 | C1 |
| C6 | C2 | R1 | A1 | S27 | D1 |
| C7 | A1 | R2 | C2 | S28 | C1 |
| C8 | A1 | R3 | C2 | S29 | A1 |
| C10 | A1 | R4 | A1 | S30 | B1 |
| C11 | C2 | R5 | A1 | S31 | B1 |
| C12 | C2 | R6 | A1 | | |
| C14 | B1 | R7 | C1 | *:B SIDE | |
| C100 | C2 | R8 | C1 | | |
| C101 | C2 | R9 | C1 | | |
| C102 | *C2 | R10 | C1 | | |
| C103 | *D2 | R11 | D1 | | |
| | | R12 | D1 | | |
| CN1 | A1 | R13 | D1 | | |
| CN2 | A2 | R14 | D1 | | |
| CN3 | D2 | R15 | C1 | | |
| CN4 | D2 | R16 | C1 | | |
| CN5 | D2 | R17 | C1 | | |
| CN6 | D2 | R18 | C1 | | |
| | | R19 | C1 | | |
| D1 | A1 | R20 | C1 | | |
| D2 | A1 | R21 | C1 | | |
| D3 | A1 | R22 | C1 | | |
| D4 | *C1 | R23 | B1 | | |
| D5 | *C1 | R24 | B1 | | |
| D6 | *C1 | R25 | B1 | | |
| D7 | *C1 | R26 | B1 | | |
| D8 | *D1 | R27 | B1 | | |
| D9 | *D1 | R28 | C1 | | |
| D10 | *D1 | R29 | D1 | | |
| D11 | *D1 | R30 | C1 | | |
| D12 | *A2 | R31 | C1 | | |
| D13 | *A2 | R32 | D1 | | |
| D14 | *A2 | R34 | B1 | | |
| D15 | *A2 | R35 | B1 | | |
| D16 | *A1 | R36 | B1 | | |
| D17 | *A2 | R37 | B1 | | |
| D18 | *B2 | R38 | B1 | | |
| D19 | *A2 | R70 | A2 | | |
| D20 | *A2 | R100 | C1 | | |
| D21 | *A1 | R101 | C1 | | |
| D22 | *A1 | R102 | D1 | | |
| D23 | *B1 | R103 | D1 | | |
| D24 | *B2 | R104 | C1 | | |
| D25 | *C2 | R105 | D1 | | |
| D26 | *A1 | R106 | D1 | | |
| D27 | *C2 | R107 | D1 | | |
| D29 | *A2 | R108 | *C2 | | |
| D30 | *D2 | R109 | *C2 | | |
| D31 | *C1 | R110 | *C2 | | |
| D32 | *C2 | R111 | *C2 | | |
| | | R112 | *D2 | | |
| EN1 | C2 | R113 | *D2 | | |
| | | R114 | *D2 | | |
| IC1 | B1 | R115 | *D2 | | |
| IC2 | B1 | R116 | *C2 | | |
| IC3 | B1 | R117 | *C2 | | |
| IC4 | A1 | R118 | *C2 | | |
| IC5 | C2 | R119 | *C2 | | |
| | | R120 | *C2 | | |
| Q1 | B1 | R121 | *C2 | | |
| Q2 | B1 | R122 | *C2 | | |
| Q3 | B1 | R123 | *C2 | | |
| Q4 | B1 | R124 | *C2 | | |
| Q5 | B1 | R125 | *C2 | | |
| Q6 | B1 | | | | |
| Q7 | B1 | RV1 | B1 | | |
| Q8 | B1 | RV2 | B2 | | |
| Q100 | C2 | RV3 | B1 | | |
| Q101 | C2 | RV4 | B2 | | |
| Q102 | D2 | RV5 | D2 | | |
| Q103 | D2 | | | | |
| Q104 | C2 | S1 | A1 | | |
| Q105 | C2 | S2 | A2 | | |
| Q106 | C2 | S3 | C1 | | |
| Q107 | C2 | S4 | D1 | | |
| Q108 | C2 | S5 | A2 | | |
| Q109 | C2 | S6 | B2 | | |
| Q110 | D2 | S7 | A2 | | |
| Q111 | D2 | S8 | A2 | | |
| Q112 | C2 | S9 | B2 | | |
| Q113 | C2 | S10 | B2 | | |
| Q114 | D2 | S11 | C2 | | |
| Q115 | D2 | S12 | C2 | | |
| Q116 | C2 | S13 | D2 | | |
| Q117 | C2 | S14 | C1 | | |
| Q118 | C2 | S15 | C2 | | |
| Q119 | C2 | S20 | D2 | | |

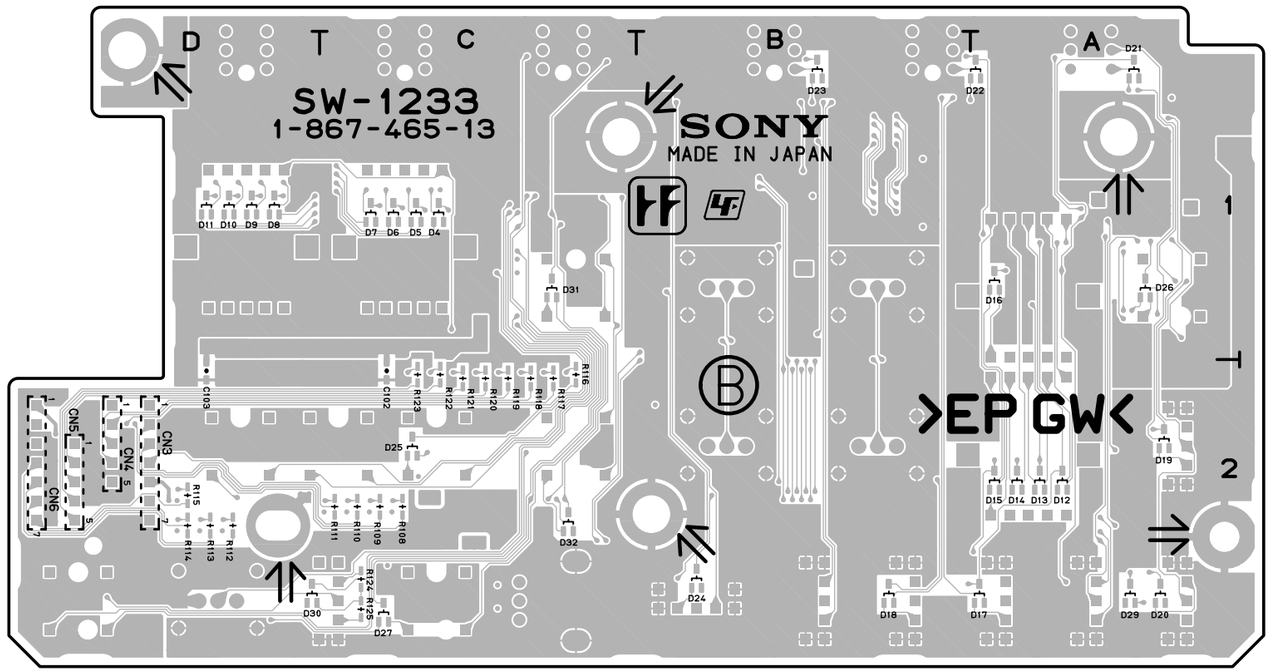


**SW-1233** -A SIDE-
SUFFIX: -31




**SW-1233** -B SIDE-
SUFFIX: -31

SW-1236, SW-1237, SW-1238, SW-1239, SW-1240, SW-1242, SW-1245

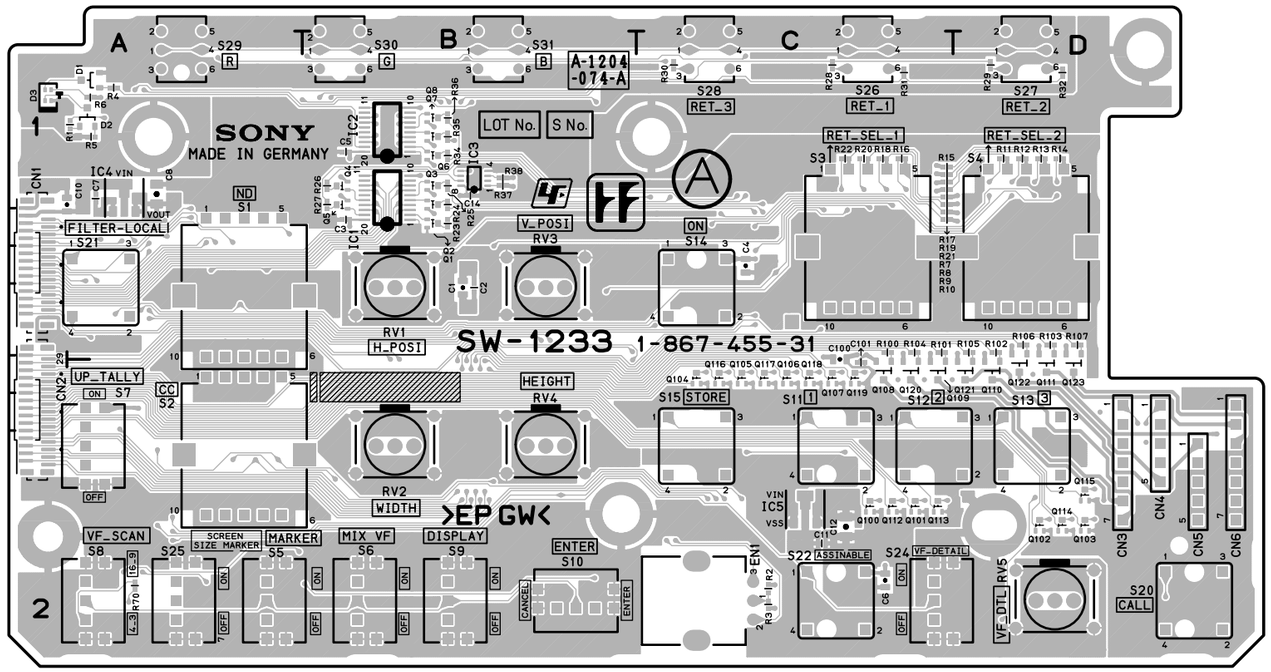SW-1237 (1-865-948-13,31)

| | | | |
|---|---|---|---|
| C1 | A1 | R6 | A2 |
| C2 | A2 | R9 | B1 |
| C3 | B1 | R10 | B1 |
| C4 | B2 | R15 | *A2 |
| C5 | A2 | R16 | *A2 |
| C6 | A2 | R18 | A2 |
| C7 | A2 | R19 | A2 |
| C8 | A2 | R20 | A2 |
| C10 | B1 | R21 | B1 |
| C11 | *A1 | R22 | B1 |
| C12 | A2 | | |
| C13 | A2 | RB1 | B2 |
| C14 | A2 | RB3 | *A1 |
| | | RB4 | A2 |
| CN1 | *A2 | RB7 | B2 |
| CN2 | *B2 | RB9 | B1 |
| | | RB10 | B2 |
| D1 | *A2 | | |
| | | S1 | A1 |
| IC1 | *B1 | S2 | A1 |
| IC2 | B2 | S3 | B1 |
| IC3 | B2 | S4 | B1 |
| R1 | A1 | SL1 | A2 |
| R2 | A2 | SL2 | A2 |
| R3 | B1 | | |
| R4 | B2 | *:B SIDE | |
| R5 | A2 | | |

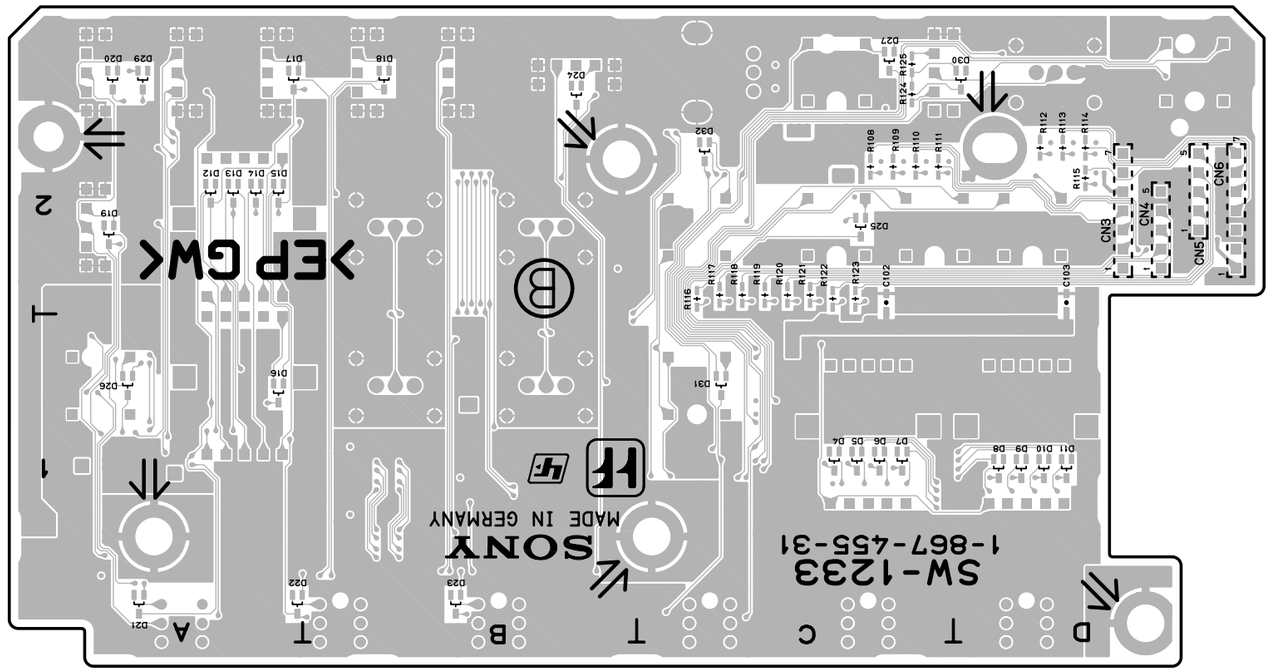SW-1239 (1-865-950-12,31)

| | | | |
|---|---|---|---|
| C1 | *A1 | R2 | *A1 |
| C2 | *B1 | R3 | A1 |
| C3 | *A1 | R4 | *A1 |
| C4 | *A1 | R5 | *A1 |
| C5 | A2 | R6 | A1 |
| C6 | *A1 | R7 | *B2 |
| C7 | A2 | R8 | A1 |
| C8 | *A1 | R9 | *A2 |
| C10 | *B2 | R10 | *A2 |
| C11 | *A2 | R11 | *B1 |
| C12 | *A2 | R12 | A2 |
| C13 | *A2 | | |
| C14 | *B1 | RV1 | B2 |
| C15 | *B1 | | |
| C16 | *A2 | S1 | A2 |
| | | S2 | A1 |
| CN3 | A2 | S3 | B1 |
| | | S4 | A2 |
| FB1 | A2 | SL1 | *B2 |
| FB2 | A2 | | |
| IC1 | A1 | VS1 | A1 |
| | | VS2 | B1 |
| Q1 | A1 | | |
| | | *:B SIDE | |
| R1 | *A1 | | |



**SW-1236** -A SIDE-
SUFFIX: -12, 31



**SW-1236** -B SIDE-
SUFFIX: -12, 31



**SW-1238** -A SIDE-
SUFFIX: -12, 31



**SW-1238** -B SIDE-
SUFFIX: -12, 31



**SW-1240** -A SIDE-
SUFFIX: -12

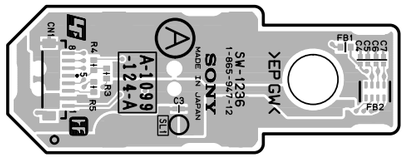

**SW-1240** -B SIDE-
SUFFIX: -12

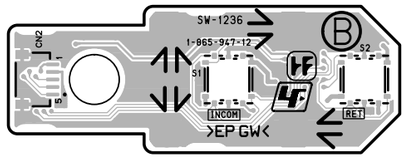

**SW-1240** -A SIDE-
SUFFIX: -13, 31



**SW-1240** -B SIDE-
SUFFIX: -13, 31



**SW-1242** -A SIDE-
SUFFIX: -13, 31

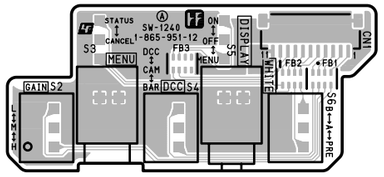

**SW-1242** -B SIDE-
SUFFIX: -13, 31

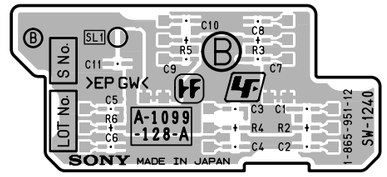

**SW-1245** -A SIDE-
SUFFIX: -13, 31

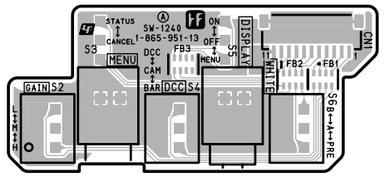**SW-1245** -B SIDE-
SUFFIX: -13, 31

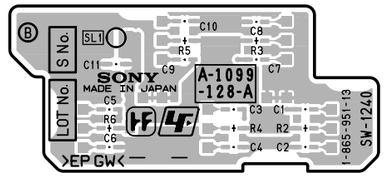

**SW-1239** -A SIDE-
SUFFIX: -12, 31



**SW-1239** -B SIDE-
SUFFIX: -12, 31

SW-1241 (1-865-952-13)

| | | | | | |
|---|---|---|---|---|---|
| C1 | *B2 | FB1 | C1 | RB2 | C1 |
| C2 | *B2 | FB2 | B1 | RB3 | B1 |
| C3 | *B2 | FB3 | B1 | RB4 | B1 |
| C4 | *A2 | FB4 | B1 | RB5 | C1 |
| C5 | *A2 | FB5 | C1 | RB6 | C1 |
| C6 | *A1 | | | RB7 | B1 |
| C7 | *B1 | IC1 | B1 | RB8 | B1 |
| C8 | *B2 | | | | |
| C9 | *C2 | R1 | *A1 | RV1 | A1 |
| C10 | *A2 | R2 | *B1 | RV2 | B1 |
| C11 | *C2 | R3 | *B2 | RV3 | B1 |
| C12 | B1 | R4 | *C2 | RV4 | C1 |
| C13 | *C1 | R5 | *A2 | RV5 | A2 |
| C14 | *B1 | R6 | *C2 | RV6 | C2 |
| C15 | *B1 | R7 | *A2 | | |
| C16 | *C1 | R8 | *B2 | S3 | C1 |
| C17 | *C1 | R9 | *B1 | S7 | A2 |
| C18 | *C2 | R10 | *B1 | S8 | B2 |
| C19 | *C1 | R11 | *C1 | S9 | B2 |
| C20 | *B2 | R12 | *B1 | S10 | C2 |
| C21 | *B2 | R23 | C1 | | |
| | | R24 | B2 | SL1 | *B2 |
| CN1 | B1 | R25 | C2 | | |
| | | | | *:B SIDE | |
| D8 | *C1 | RB1 | C1 | | |

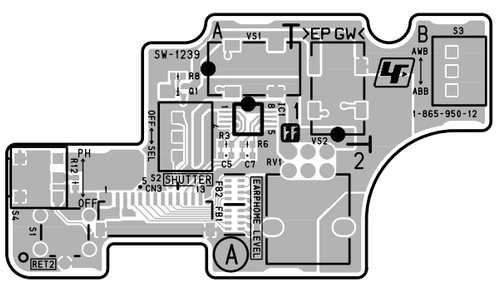


**SW-1241** -A SIDE-
SUFFIX: -13

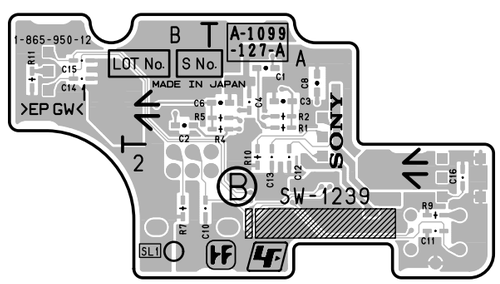


**SW-1241** -B SIDE-
SUFFIX: -13

SW-1241 (1-865-952-15,31)
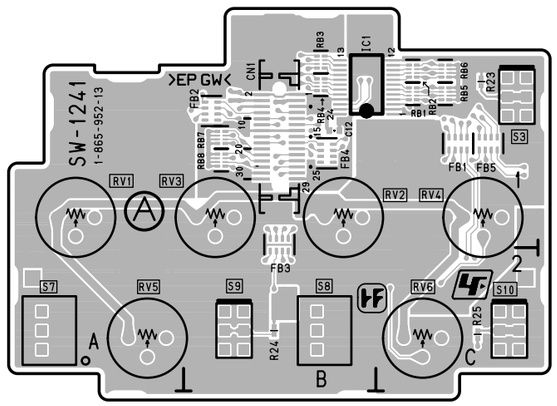
| | | | | | |
|---|---|---|---|---|---|
| C1 | *B2 | FB3 | B1 | R25 | C2 |
| C2 | *B2 | FB4 | B1 | | |
| C3 | *B2 | FB5 | C1 | RB1 | C1 |
| C4 | *A2 | | | RB2 | C1 |
| C5 | *A2 | IC1 | B1 | RB3 | B1 |
| C6 | *A1 | | | RB4 | B1 |
| C7 | *B1 | LP1 | *A2 | RB5 | C1 |
| C8 | *B2 | LP2 | *C2 | RB6 | C1 |
| C9 | *C2 | | | RB7 | B1 |
| C10 | *A2 | R1 | *A1 | RB8 | B1 |
| C11 | *B2 | R2 | *B1 | | |
| C12 | B1 | R3 | *B2 | RV1 | A1 |
| C13 | *B1 | R4 | *C2 | RV2 | B1 |
| C14 | *B1 | R5 | *A2 | RV3 | B1 |
| C15 | *B1 | R6 | *C2 | RV4 | C1 |
| C16 | *C1 | R7 | *A2 | RV5 | A2 |
| C17 | *C1 | R8 | *B2 | RV6 | C2 |
| C18 | *C2 | R9 | *B1 | | |
| C19 | *C2 | R10 | *B1 | S3 | C1 |
| C20 | *B2 | R11 | *C1 | S7 | A2 |
| C21 | *B2 | R12 | *B1 | S8 | B2 |
| | | R13 | B1 | S9 | B2 |
| CN1 | B1 | R14 | B1 | S10 | C2 |
| | | R15 | *C1 | | |
| D8 | *C1 | R16 | *B1 | SL1 | *B2 |
| D9 | *B1 | R17 | *A2 | | |
| | | R18 | *A2 | *:B SIDE | |
| FB1 | C1 | R23 | C1 | | |
| FB2 | B1 | R24 | B2 | | |

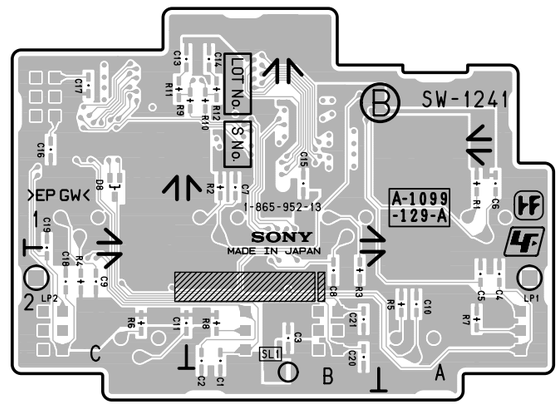


**SW-1241** -A SIDE-
SUFFIX: -15, 31




**SW-1241** -B SIDE-
SUFFIX: -15, 31

SW-1273 (1-865-946-13)
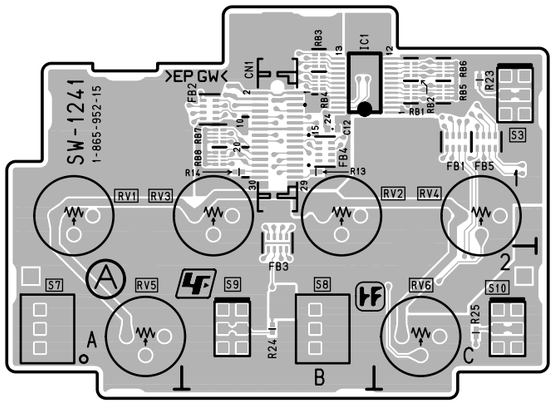
| | | | | | | | |
|---|---|---|---|---|---|---|---|
| C1 | *A1 | D2 | C1 | R3 | C1 | R48 | A2 |
| C2 | *A1 | D3 | C2 | R4 | C1 | R49 | A2 |
| C3 | *C1 | D4 | C1 | R5 | C1 | R50 | A2 |
| C4 | C2 | D5 | B2 | R6 | C1 | R51 | A2 |
| C5 | C2 | D6 | C2 | R7 | C2 | R52 | B2 |
| C6 | A2 | D7 | B2 | R8 | C2 | R53 | B2 |
| C7 | A2 | D9 | *A1 | R9 | C1 | | |
| C8 | *C2 | D10 | A1 | R10 | C1 | RB1 | *C1 |
| C9 | *C2 | D11 | A1 | R11 | B2 | RB2 | *B1 |
| C10 | *C1 | D12 | B1 | R12 | B2 | RB3 | *B1 |
| C11 | *C1 | D13 | A2 | R13 | C2 | RB4 | *B1 |
| C12 | A1 | D14 | B2 | R14 | C2 | RB5 | *C1 |
| C13 | B1 | D15 | A2 | R15 | C2 | RB6 | *B1 |
| C14 | B1 | D16 | B2 | R16 | C2 | RB7 | B1 |
| C15 | B1 | | | R21 | A1 | RB8 | B1 |
| C16 | B1 | FB1 | C1 | R22 | C1 | | |
| C17 | B1 | FB2 | B1 | R28 | A1 | S1 | A1 |
| C18 | C1 | FB3 | *B1 | R30 | *C1 | S2 | B1 |
| C19 | *C1 | FB4 | C1 | R31 | *C1 | S5 | B1 |
| C20 | *C1 | | | R32 | *C1 | S6 | C1 |
| C21 | *C1 | IC1 | *B1 | R33 | C1 | | |
| C31 | *B2 | | | R40 | A1 | SL1 | *B2 |
| | | Q1 | C2 | R41 | A1 | | |
| CN1 | *A1 | Q2 | C2 | R42 | A1 | *:B SIDE | |
| CN2 | *B1 | Q3 | A2 | R43 | A1 | | |
| CN3 | *A1 | Q4 | A2 | R44 | B1 | | |
| CN4 | *C1 | | | R45 | B1 | | |
| | | R1 | C1 | R46 | A2 | | |
| D1 | C1 | R2 | B1 | R47 | A2 | | |

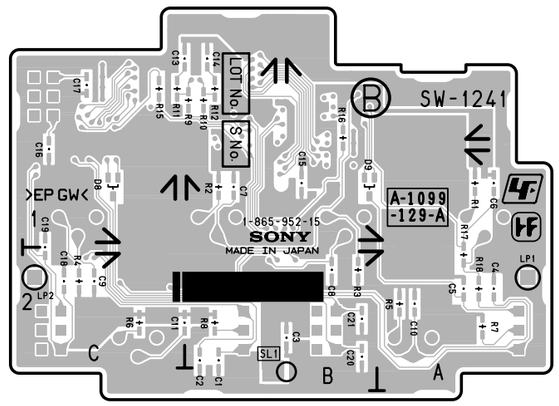


**SW-1273** -A SIDE-
SUFFIX: -13




**SW-1273** -B SIDE-
SUFFIX: -13

SW-1273 (1-865-946-21,31)
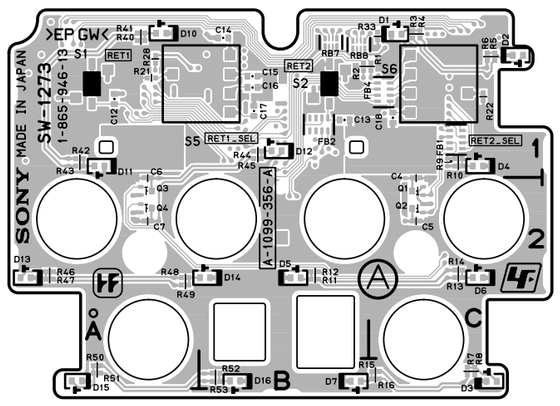
| | | | | | | | |
|---|---|---|---|---|---|---|---|
| C1 | *A1 | D2 | C1 | R1 | C1 | RB3 | *B1 |
| C2 | *A1 | D3 | C1 | R2 | B1 | RB4 | *B1 |
| C3 | *C1 | D4 | B1 | R3 | C1 | RB5 | *C1 |
| C4 | C2 | D5 | C1 | R4 | C1 | RB6 | *B1 |
| C5 | C2 | D6 | B2 | R5 | C1 | RB7 | B1 |
| C6 | A2 | D7 | C2 | R6 | C2 | RB8 | B1 |
| C7 | A2 | D8 | C2 | R7 | C1 | | |
| C8 | *C2 | D9 | *A1 | R8 | B2 | S1 | A1 |
| C9 | *C2 | D10 | C2 | R9 | C2 | S2 | B1 |
| C10 | *C1 | D11 | A1 | R10 | C2 | S5 | B1 |
| C11 | *C1 | D12 | B1 | R11 | C2 | S6 | C1 |
| C12 | A1 | D13 | A1 | R12 | A1 | | |
| C13 | B1 | D14 | B1 | R13 | B1 | SL1 | *B2 |
| C14 | A1 | D15 | A2 | R14 | A1 | | |
| C15 | B1 | D16 | B2 | R15 | A1 | *:B SIDE | |
| C16 | B1 | D17 | A2 | R16 | A2 | | |
| C17 | B1 | D18 | A2 | R17 | A2 | | |
| C18 | C1 | D19 | B2 | R18 | A2 | | |
| C19 | *C1 | D20 | B2 | R19 | A2 | | |
| C20 | *C1 | | | R20 | B2 | | |
| C21 | *C1 | FB1 | C1 | R21 | A1 | | |
| C31 | *B2 | FB2 | B1 | R22 | C1 | | |
| | | FB3 | *B1 | R23 | B2 | | |
| CN1 | *A1 | FB4 | C1 | R28 | A1 | | |
| CN2 | *B1 | | | R32 | *B1 | | |
| CN3 | *A1 | IC1 | *B1 | R33 | C1 | | |
| CN4 | *C1 | | | | | | |
| | | Q1 | C2 | RB1 | *C1 | | |
| D1 | C1 | Q2 | A2 | RB2 | *B1 | | |

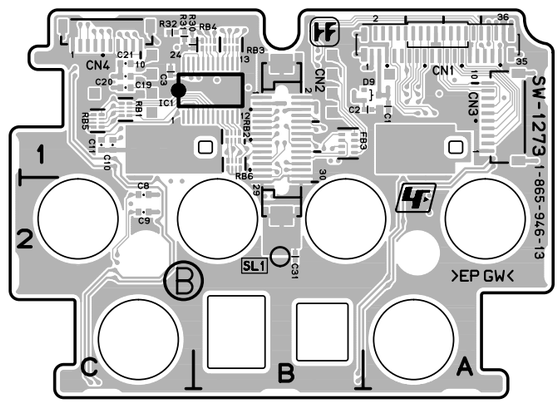


**SW-1273** -A SIDE-
SUFFIX: -21, 31




**SW-1273** -B SIDE-
SUFFIX: -21, 31

TG-243 (1-865-972-14)
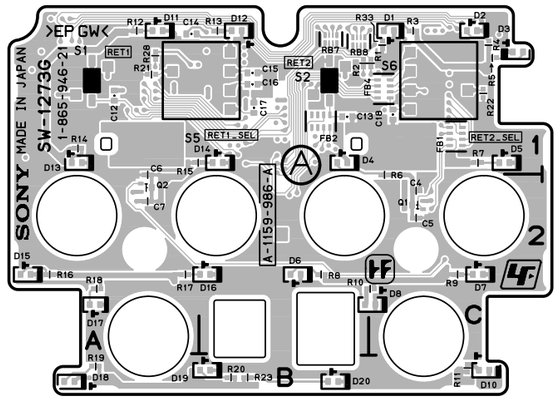
| | | | | | | | |
|---|---|---|---|---|---|---|---|
| C1 | C1 | C93 | *A2 | C185 | B2 | L3 | C1 |
| C2 | C1 | C94 | A1 | C186 | B2 | L4 | B1 |
| C3 | *C1 | C95 | *B1 | C187 | B2 | L5 | C1 |
| C4 | *C1 | C96 | *B2 | C188 | B2 | L6 | C2 |
| C5 | *C1 | C97 | *A1 | C189 | *A2 | L7 | C1 |
| C6 | *C1 | C98 | *A1 | C190 | *A2 | L8 | C1 |
| C7 | *C1 | C99 | *A1 | C191 | A2 | L9 | *B1 |
| C8 | *C1 | C100 | *B1 | C192 | *A2 | L10 | *C2 |
| C9 | *C1 | C101 | *B1 | C193 | A2 | L11 | *C2 |
| C10 | *C1 | C102 | *B1 | C194 | *A2 | L12 | *C1 |
| C11 | *C1 | C103 | *B1 | C195 | A2 | L13 | *C1 |
| C12 | *C1 | C104 | *B1 | C196 | A2 | L14 | A1 |
| C13 | C1 | C105 | *A1 | C197 | *B1 | L15 | *B1 |
| C14 | *C1 | C106 | *A1 | C198 | *B2 | L16 | B1 |
| C15 | C1 | C107 | *A1 | C199 | *B1 | L17 | *B1 |
| C16 | *C1 | C108 | *B1 | C200 | *B1 | | |
| C17 | C1 | C109 | *A2 | C201 | *B1 | Q1 | C1 |
| C18 | *C1 | C110 | *A1 | C202 | *A2 | Q2 | *C1 |
| C19 | *C1 | C111 | *A1 | C203 | A1 | Q3 | C1 |
| C20 | C1 | C112 | *A1 | C204 | A1 | Q4 | *C1 |
| C21 | *C1 | C113 | *A1 | C205 | *C1 | Q5 | *C1 |
| C22 | *C1 | C114 | *A1 | C206 | *A2 | Q6 | *C1 |
| C23 | *C1 | C115 | *B1 | C207 | *A2 | Q7 | *B1 |
| C24 | *C1 | C116 | *A1 | C208 | *B2 | Q8 | *B1 |
| C25 | B1 | C117 | *A2 | C209 | *A2 | Q9 | *B1 |
| C26 | C1 | C118 | B1 | C210 | *A2 | Q10 | *B1 |
| C27 | *B1 | C119 | *B1 | | | Q11 | *C1 |
| C28 | *B1 | C120 | *B1 | CL1 | C2 | Q12 | *C1 |
| C29 | *B1 | C121 | B2 | CL2 | C2 | | |
| C30 | *C1 | C122 | *B1 | CL3 | C2 | R1 | *C1 |
| C31 | *B1 | C123 | A1 | CL6 | C1 | R2 | *C1 |
| C32 | *C2 | C124 | *B2 | CL8 | C1 | R3 | *C1 |
| C33 | *C2 | C125 | *B1 | CL9 | B2 | R4 | *C1 |
| C34 | *B1 | C126 | *B1 | CL10 | B2 | R5 | *C1 |
| C35 | B1 | C127 | *B1 | CL11 | A2 | R6 | *C1 |
| C36 | *B2 | C128 | *B2 | CL12 | A2 | R7 | *C1 |
| C37 | *C2 | C129 | *A1 | | | R8 | *C1 |
| C38 | *C1 | C130 | *A1 | CN1 | C1 | R9 | *C1 |
| C39 | B1 | C131 | *A1 | CN2 | B1 | R10 | *C1 |
| C40 | *B1 | C132 | *A1 | CN3 | *C2 | R11 | *C1 |
| C41 | C2 | C133 | *B1 | | | R12 | *C1 |
| C42 | C1 | C134 | *A1 | D1 | B2 | R13 | *C1 |
| C43 | B1 | C135 | *A1 | | | R14 | *B1 |
| C44 | *B1 | C136 | *A1 | E1 | B2 | R15 | C1 |
| C45 | C1 | C137 | *A1 | | | R16 | *C1 |
| C46 | *B2 | C138 | *B1 | IC1 | *C1 | R17 | *C1 |
| C47 | *B2 | C139 | *B1 | IC2 | *C1 | R18 | C1 |
| C48 | *B2 | C140 | *B1 | IC3 | *C1 | R19 | C1 |
| C49 | *C1 | C141 | *A2 | IC4 | *B1 | R20 | *C1 |
| C50 | *B2 | C142 | *A2 | IC5 | *B2 | R21 | *C1 |
| C51 | *B1 | C143 | *A2 | IC6 | B2 | R22 | *C1 |
| C52 | *B2 | C144 | *A1 | IC7 | *B2 | R23 | *C1 |
| C53 | *B2 | C145 | *A1 | IC8 | *C2 | R24 | C1 |
| C54 | *C1 | C146 | B2 | IC9 | C2 | R25 | *C1 |
| C55 | *B1 | C147 | *B2 | IC10 | *C1 | R26 | *C1 |
| C56 | *B1 | C148 | *B2 | IC11 | *C1 | R27 | *C1 |
| C57 | C1 | C149 | B2 | IC12 | C1 | R28 | *C1 |
| C58 | *C1 | C150 | B2 | IC13 | C2 | R29 | *C1 |
| C59 | B2 | C151 | B2 | IC14 | *C1 | R30 | *B1 |
| C60 | *C2 | C152 | B2 | IC15 | *B1 | R31 | *B1 |
| C61 | *C2 | C153 | A2 | IC16 | *C1 | R32 | *C1 |
| C62 | *C2 | C154 | A2 | IC17 | A1 | R33 | *C1 |
| C63 | *C1 | C155 | *B2 | IC18 | *A1 | R34 | *B1 |
| C64 | *C2 | C156 | *B2 | IC19 | *A2 | R35 | *C1 |
| C65 | *C2 | C157 | *A2 | IC20 | A2 | R36 | *B1 |
| C66 | *C2 | C158 | A2 | IC21 | *A2 | R37 | *B1 |
| C67 | *C2 | C159 | B2 | IC22 | B2 | R38 | *C1 |
| C68 | *C2 | C160 | *B2 | IC23 | B2 | R39 | *C2 |
| C69 | *C2 | C161 | B2 | IC24 | B2 | R40 | *C2 |
| C70 | *C2 | C162 | *B2 | IC25 | B2 | R41 | *B1 |
| C71 | *C1 | C163 | B2 | IC26 | B2 | R42 | *B1 |
| C72 | *C1 | C164 | B2 | IC27 | A2 | R43 | *B1 |
| C73 | *C1 | C165 | *A2 | IC28 | A2 | R44 | *B1 |
| C74 | *C2 | C166 | *A2 | IC29 | A2 | R45 | *B1 |
| C75 | *C1 | C167 | A2 | IC30 | A2 | R46 | *B1 |
| C76 | *C2 | C168 | *A2 | IC31 | A2 | R47 | *B2 |
| C77 | *C2 | C169 | *A2 | IC32 | A2 | R48 | *B2 |
| C78 | *C2 | C170 | B2 | IC33 | A2 | R49 | *B2 |
| C79 | *C2 | C171 | B2 | IC34 | A2 | R50 | *B2 |
| C80 | *C2 | C172 | B2 | IC35 | A2 | R51 | *B2 |
| C81 | *C2 | C173 | B2 | IC36 | A2 | R52 | *B2 |
| C82 | *C2 | C174 | *A2 | IC37 | A1 | R53 | B2 |
| C83 | *C2 | C175 | *A2 | IC38 | A1 | R54 | B2 |
| C84 | *C2 | C176 | A2 | IC39 | A1 | R55 | *B2 |
| C85 | A1 | C177 | *A2 | IC40 | B1 | R56 | *B2 |
| C86 | A1 | C178 | A2 | IC41 | *A1 | R57 | *B2 |
| C87 | *A1 | C179 | *A2 | IC42 | *B1 | R58 | *B2 |
| C88 | *A1 | C180 | A2 | IC43 | *B2 | R59 | *B2 |
| C89 | A1 | C181 | A2 | IC44 | *A2 | R60 | B1 |
| C90 | *A2 | C182 | A2 | | | R61 | B1 |
| C91 | *A2 | C183 | *A2 | L1 | B1 | R62 | *C1 |
| C92 | *A1 | C184 | *A2 | L2 | C1 | R63 | *C1 |

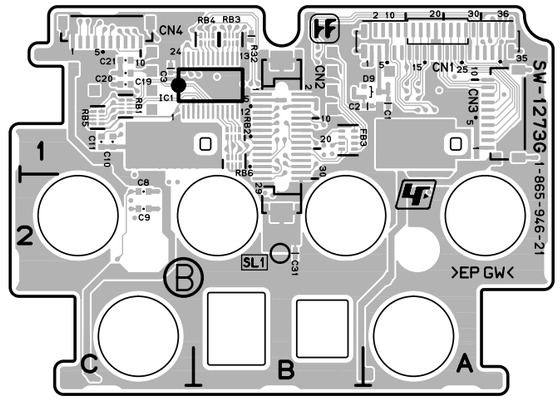


**TG-243** -A SIDE-
SUFFIX: -14




**TG-243** -B SIDE-
SUFFIX: -14

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| R64 | *C1 | R202 | B2 | R295 | *B2 | X1 | *C2 |
| R65 | *B2 | R203 | B1 | R296 | A2 | X2 | *C2 |
| R66 | *C1 | R204 | B1 | R297 | A2 | | |
| R67 | *B1 | R205 | B1 | R298 | B2 | *:B SIDE | |
| R68 | B2 | R206 | C1 | R299 | B2 | | |
| R69 | B2 | R207 | A1 | R300 | B2 | | |
| R70 | *C1 | R208 | A1 | R301 | B2 | | |
| R71 | *B2 | R209 | A1 | R302 | A2 | | |
| R72 | B2 | R210 | A1 | R303 | A2 | | |
| R73 | B2 | R211 | A1 | R304 | *A2 | | |
| R74 | B2 | R212 | *A2 | R305 | A2 | | |
| R75 | B2 | R213 | *A1 | R306 | *A2 | | |
| R76 | B2 | R214 | *A1 | R307 | A2 | | |
| R77 | B2 | R215 | *A2 | R308 | A2 | | |
| R78 | B2 | R216 | *A2 | R309 | A2 | | |
| R79 | B2 | R217 | B2 | R310 | A2 | | |
| R80 | B2 | R218 | B2 | R311 | A2 | | |
| R81 | B2 | R219 | B2 | R312 | A2 | | |
| R82 | B2 | R220 | A1 | R313 | A2 | | |
| R83 | B2 | R221 | B2 | R314 | A2 | | |
| R84 | *C1 | R222 | A1 | R315 | *A2 | | |
| R85 | *C1 | R223 | A1 | R316 | A2 | | |
| R86 | *C1 | R224 | A1 | R317 | *A2 | | |
| R99 | *B2 | R225 | A1 | R318 | *B2 | | |
| R120 | B2 | R226 | B2 | R319 | *B2 | | |
| R121 | *C2 | R227 | B1 | R320 | A2 | | |
| R122 | *C2 | R228 | B1 | R321 | A2 | | |
| R123 | *C1 | R229 | B2 | R322 | *B2 | | |
| R124 | B1 | R230 | *A1 | R323 | *B2 | | |
| R125 | B1 | R231 | *A1 | R324 | B2 | | |
| R126 | B2 | R232 | B2 | R325 | B2 | | |
| R127 | B2 | R233 | *A1 | R326 | B2 | | |
| R128 | B2 | R234 | *A1 | R327 | B2 | | |
| R129 | C2 | R235 | B2 | R328 | A2 | | |
| R130 | C2 | R236 | *B1 | R329 | A2 | | |
| R131 | C2 | R237 | *B1 | R330 | *A2 | | |
| R132 | C2 | R238 | B2 | R331 | A2 | | |
| R133 | C2 | R239 | *B1 | R332 | *A2 | | |
| R134 | C2 | R240 | *B1 | R333 | A2 | | |
| R135 | C2 | R241 | *B1 | R334 | A2 | | |
| R136 | C2 | R242 | *B2 | R335 | A2 | | |
| R137 | C2 | R243 | *A1 | R336 | A2 | | |
| R138 | *C2 | R244 | *A1 | R337 | A2 | | |
| R139 | *C2 | R245 | *A1 | R338 | A2 | | |
| R140 | C1 | R246 | *A1 | R339 | A2 | | |
| R141 | C1 | R247 | *A1 | R340 | *A1 | | |
| R142 | C1 | R248 | *A1 | R341 | *A1 | | |
| R143 | C1 | R249 | *B2 | R342 | *B2 | | |
| R144 | C1 | R250 | *B1 | R343 | *A1 | | |
| R145 | C1 | R251 | *B1 | R344 | *B1 | | |
| R146 | C1 | R252 | *A1 | R345 | *B1 | | |
| R147 | C1 | R253 | *B1 | R346 | *A1 | | |
| R148 | C1 | R254 | B2 | R347 | *A1 | | |
| R149 | C1 | R255 | *B2 | R348 | *C1 | | |
| R150 | B1 | R256 | B2 | R349 | *C1 | | |
| R151 | B1 | R257 | *B2 | R350 | *A1 | | |
| R153 | C1 | R258 | *B2 | R351 | *A1 | | |
| R155 | B2 | R259 | *B2 | R352 | *A1 | | |
| R156 | B2 | R260 | B2 | R353 | *A1 | | |
| R157 | C2 | R261 | B2 | R354 | *A1 | | |
| R158 | C2 | R262 | *B2 | R355 | *A1 | | |
| R159 | C2 | R263 | *B2 | R356 | *A1 | | |
| R160 | C2 | R264 | *A2 | R357 | *A1 | | |
| R161 | C2 | R265 | B2 | R358 | *A1 | | |
| R162 | C2 | R266 | B2 | R359 | *A1 | | |
| R163 | C2 | R267 | B2 | R360 | *A1 | | |
| R164 | C2 | R268 | B2 | R361 | *A1 | | |
| R165 | C2 | R269 | B2 | R362 | *A1 | | |
| R166 | C2 | R270 | B2 | R363 | B2 | | |
| R167 | C2 | R271 | A2 | R364 | B2 | | |
| R168 | C2 | R272 | A2 | R365 | B2 | | |
| R169 | C2 | R273 | *A2 | R366 | B2 | | |
| R170 | C2 | R274 | *B2 | R367 | A2 | | |
| R171 | C1 | R275 | B2 | R368 | A2 | | |
| R172 | C1 | R276 | *B2 | R369 | A2 | | |
| R173 | C1 | R277 | B2 | R370 | A2 | | |
| R174 | C1 | R278 | B2 | R371 | A2 | | |
| R175 | C1 | R279 | B2 | R372 | A2 | | |
| R176 | C1 | R280 | A2 | R373 | A2 | | |
| R177 | C1 | R281 | A2 | R374 | A2 | | |
| R178 | C1 | R282 | B2 | R375 | B1 | | |
| R179 | C1 | R283 | B2 | R376 | *A2 | | |
| R180 | C1 | R284 | B2 | R377 | B2 | | |
| R181 | C1 | R285 | B2 | R378 | B2 | | |
| R182 | C1 | R286 | *A2 | R379 | A2 | | |
| R183 | C1 | R288 | A2 | R380 | A2 | | |
| R184 | C1 | R289 | *A2 | R381 | A2 | | |
| R185 | C1 | R290 | A2 | R382 | A2 | | |
| R190 | B2 | R291 | *A2 | | | | |
| R196 | C2 | R292 | *B2 | RB1 | B2 | | |
| R197 | C2 | R293 | *B2 | | | | |
| R198 | C2 | R294 | *B2 | S1 | B1 | | |

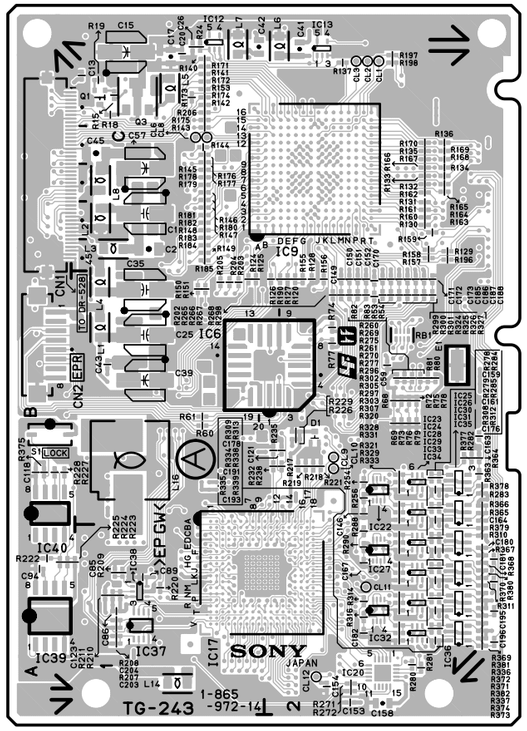TG-243 (1-865-972-21)

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| C1 | C1 | C93 | *A2 | C185 | B2 | L3 | C1 |
| C2 | C1 | C94 | A1 | C186 | B2 | L4 | B1 |
| C3 | *C1 | C95 | *B1 | C187 | B2 | L5 | C1 |
| C4 | *C1 | C96 | *B2 | C188 | B2 | L6 | C2 |
| C5 | *C1 | C97 | *A1 | C189 | *A2 | L7 | C1 |
| C6 | *C1 | C98 | *A1 | C190 | *A2 | L8 | C1 |
| C7 | *C1 | C99 | *A1 | C191 | A2 | L9 | *B1 |
| C8 | *C1 | C100 | *B1 | C192 | *A2 | L10 | *C2 |
| C9 | *C1 | C101 | *B1 | C193 | A2 | L11 | *C2 |
| C10 | *C1 | C102 | *B1 | C194 | *A2 | L12 | *C1 |
| C11 | *C1 | C103 | *B1 | C195 | A2 | L13 | *C1 |
| C12 | *C1 | C104 | *B1 | C196 | A2 | L14 | A1 |
| C13 | C1 | C105 | *A1 | C197 | *B1 | L15 | *B1 |
| C14 | *C1 | C106 | *A1 | C198 | *B2 | L16 | B1 |
| C15 | C1 | C107 | *A1 | C199 | *B1 | L17 | *B1 |
| C16 | *C1 | C108 | *B1 | C200 | *B1 | | |
| C17 | C1 | C109 | *A2 | C201 | *B1 | Q1 | C1 |
| C18 | *C1 | C110 | *A1 | C202 | *A2 | Q2 | *C1 |
| C19 | *C1 | C111 | *A1 | C203 | A1 | Q3 | C1 |
| C20 | C1 | C112 | *A1 | C204 | A1 | Q4 | *C1 |
| C21 | *C1 | C113 | *A1 | C205 | *C1 | Q5 | *C1 |
| C22 | *C1 | C114 | *A1 | C206 | *A2 | Q6 | *C1 |
| C23 | *C1 | C115 | *B1 | C207 | *A2 | Q7 | *B1 |
| C24 | *C1 | C116 | *A1 | C208 | *B2 | Q8 | *B1 |
| C25 | B1 | C117 | *A2 | C209 | *A2 | Q9 | *B1 |
| C26 | C1 | C118 | B1 | C210 | *A2 | Q10 | *B1 |
| C27 | *B1 | C119 | *B1 | | | Q11 | *C1 |
| C28 | *B1 | C120 | *B1 | CL1 | C2 | Q12 | *C1 |
| C29 | *B1 | C121 | B2 | CL2 | C2 | | |
| C30 | *C1 | C122 | *B1 | CL3 | C2 | R1 | *C1 |
| C31 | *B1 | C123 | A1 | CL6 | C1 | R2 | *C1 |
| C32 | *C2 | C124 | *B2 | CL8 | C1 | R3 | *C1 |
| C33 | *C2 | C125 | *B1 | CL9 | B2 | R4 | *C1 |
| C34 | *B1 | C126 | *B1 | CL10 | B2 | R5 | *C1 |
| C35 | B1 | C127 | *B1 | CL11 | A2 | R6 | *C1 |
| C36 | *B2 | C128 | *B2 | CL12 | A2 | R7 | *C1 |
| C37 | *C2 | C129 | *A1 | | | R8 | *C1 |
| C38 | *C1 | C130 | *A1 | CN1 | C1 | R9 | *C1 |
| C39 | B1 | C131 | *A1 | CN2 | B1 | R10 | *C1 |
| C40 | *B1 | C132 | *A1 | CN3 | *C2 | R11 | *C1 |
| C41 | C2 | C133 | *B1 | | | R12 | *C1 |
| C42 | C1 | C134 | *A1 | D1 | B2 | R13 | *C1 |
| C43 | B1 | C135 | *A1 | | | R14 | *B1 |
| C44 | *B1 | C136 | *A1 | E1 | B2 | R15 | C1 |
| C45 | C1 | C137 | *A1 | | | R16 | *C1 |
| C46 | *B2 | C138 | *B1 | IC1 | *C1 | R17 | *C1 |
| C47 | *B2 | C139 | *B1 | IC2 | *C1 | R18 | C1 |
| C48 | *B2 | C140 | *B1 | IC3 | *C1 | R19 | C1 |
| C49 | *C1 | C141 | *A2 | IC4 | *B1 | R20 | *C1 |
| C50 | *B2 | C142 | *A2 | IC5 | *B2 | R21 | *C1 |
| C51 | *B1 | C143 | *A2 | IC6 | B2 | R22 | *C1 |
| C52 | *B2 | C144 | *A1 | IC7 | *B2 | R23 | *C1 |
| C53 | *B2 | C145 | *A1 | IC8 | *C2 | R24 | C1 |
| C54 | *C1 | C146 | B2 | IC9 | C2 | R25 | *C1 |
| C55 | *B1 | C147 | *B2 | IC10 | *C1 | R26 | *C1 |
| C56 | *B1 | C148 | *B2 | IC11 | *C1 | R27 | *C1 |
| C57 | C1 | C149 | B2 | IC12 | C1 | R28 | *C1 |
| C58 | *C1 | C150 | B2 | IC13 | C2 | R29 | *C1 |
| C59 | B2 | C151 | B2 | IC14 | *C1 | R30 | *B1 |
| C60 | *C2 | C152 | B2 | IC15 | *B1 | R31 | *B1 |
| C61 | *C2 | C153 | A2 | IC16 | *C1 | R32 | *C1 |
| C62 | *C2 | C154 | A2 | IC17 | A1 | R33 | *C1 |
| C63 | *C1 | C155 | *B2 | IC18 | *A1 | R34 | *B1 |
| C64 | *C2 | C156 | *B2 | IC19 | *A2 | R35 | *C1 |
| C65 | *C2 | C157 | *A2 | IC20 | A2 | R36 | *B1 |
| C66 | *C2 | C158 | A2 | IC21 | *A2 | R37 | *B1 |
| C67 | *C2 | C159 | B2 | IC22 | B2 | R38 | *C1 |
| C68 | *C2 | C160 | *B2 | IC23 | B2 | R39 | *C2 |
| C69 | *C2 | C161 | B2 | IC24 | B2 | R40 | *C2 |
| C70 | *C2 | C162 | *B2 | IC25 | B2 | R41 | *B1 |
| C71 | *C1 | C163 | B2 | IC26 | B2 | R42 | *B1 |
| C72 | *C1 | C164 | B2 | IC27 | A2 | R43 | *B1 |
| C73 | *C1 | C165 | *A2 | IC28 | A2 | R44 | *B1 |
| C74 | *C2 | C166 | *A2 | IC29 | A2 | R45 | *B1 |
| C75 | *C1 | C167 | A2 | IC30 | A2 | R46 | *B1 |
| C76 | *C2 | C168 | *A2 | IC31 | A2 | R47 | *B2 |
| C77 | *C2 | C169 | *A2 | IC32 | A2 | R48 | *B2 |
| C78 | *C2 | C170 | B2 | IC33 | A2 | R49 | *B2 |
| C79 | *C2 | C171 | B2 | IC34 | A2 | R50 | *B2 |
| C80 | *C2 | C172 | B2 | IC35 | A2 | R51 | *B2 |
| C81 | *C2 | C173 | B2 | IC36 | A2 | R52 | *B2 |
| C82 | *C2 | C174 | *A2 | IC37 | A1 | R53 | B2 |
| C83 | *C2 | C175 | *A2 | IC38 | A1 | R54 | B2 |
| C84 | *C2 | C176 | A2 | IC39 | A1 | R55 | *B2 |
| C85 | A1 | C177 | *A2 | IC40 | B1 | R56 | *B2 |
| C86 | A1 | C178 | A2 | IC41 | *A1 | R57 | *B2 |
| C87 | *A1 | C179 | *A2 | IC42 | *B1 | R58 | *B2 |
| C88 | *A1 | C180 | A2 | IC43 | *B2 | R59 | *B2 |
| C89 | A1 | C181 | A2 | IC44 | *A2 | R60 | B1 |
| C90 | *A2 | C182 | A2 | | | R61 | B1 |
| C91 | *A2 | C183 | *A2 | L1 | B1 | R62 | *C1 |
| C92 | *A1 | C184 | *A2 | L2 | C1 | R63 | *C1 |

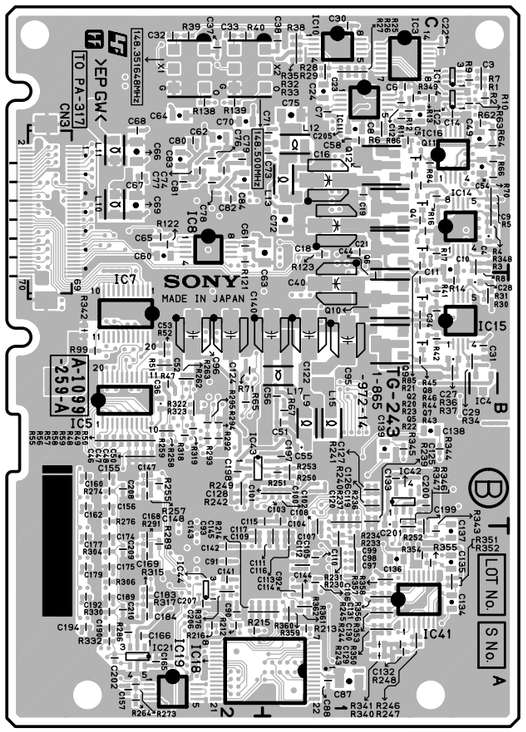


**TG-243** -A SIDE-
SUFFIX: -21




**TG-243** -B SIDE-
SUFFIX: -21

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| R64 | *C1 | R197 | C2 | R293 | *B2 | S1 | B1 |
| R65 | *B2 | R198 | C2 | R294 | *B2 | | |
| R66 | *C1 | R202 | B2 | R295 | *B2 | X1 | *C2 |
| R67 | *B1 | R203 | B1 | R296 | A2 | X2 | *C2 |
| R68 | B2 | R204 | B1 | R297 | A2 | | |
| R69 | B2 | R205 | B1 | R298 | B2 | *:B SIDE | |
| R70 | *C1 | R206 | C1 | R299 | B2 | | |
| R71 | *B2 | R207 | A1 | R300 | B2 | | |
| R72 | B2 | R208 | A1 | R301 | B2 | | |
| R73 | B2 | R209 | A1 | R302 | A2 | | |
| R74 | B2 | R210 | A1 | R303 | A2 | | |
| R75 | B2 | R211 | A1 | R304 | *A2 | | |
| R76 | B2 | R212 | *A2 | R305 | A2 | | |
| R77 | B2 | R213 | *A1 | R306 | *A2 | | |
| R78 | B2 | R214 | *A1 | R307 | A2 | | |
| R79 | B2 | R215 | *A2 | R308 | A2 | | |
| R80 | B2 | R216 | *A2 | R309 | A2 | | |
| R81 | B2 | R217 | B2 | R310 | A2 | | |
| R82 | B2 | R218 | B2 | R311 | A2 | | |
| R83 | B2 | R219 | B2 | R312 | A2 | | |
| R84 | *C1 | R220 | A1 | R313 | A2 | | |
| R85 | *C1 | R221 | B2 | R314 | A2 | | |
| R86 | *C1 | R222 | A1 | R315 | *A2 | | |
| R87 | *C2 | R223 | A1 | R316 | A2 | | |
| R88 | *C1 | R224 | A1 | R317 | *A2 | | |
| R99 | *B2 | R225 | A1 | R318 | *B2 | | |
| R120 | B2 | R226 | B2 | R319 | *B2 | | |
| R121 | *C2 | R227 | B1 | R320 | A2 | | |
| R122 | *C2 | R228 | B1 | R321 | A2 | | |
| R123 | *C1 | R229 | B2 | R322 | *B2 | | |
| R124 | B1 | R230 | *A1 | R323 | *B2 | | |
| R125 | B1 | R231 | *A1 | R324 | B2 | | |
| R126 | B2 | R232 | B2 | R325 | B2 | | |
| R127 | B2 | R233 | *A1 | R326 | B2 | | |
| R128 | B2 | R234 | *A1 | R327 | B2 | | |
| R129 | C2 | R235 | B2 | R328 | A2 | | |
| R130 | C2 | R236 | *B1 | R329 | A2 | | |
| R131 | C2 | R237 | *B1 | R330 | *A2 | | |
| R132 | C2 | R238 | B2 | R331 | A2 | | |
| R133 | C2 | R239 | *B1 | R332 | *A2 | | |
| R134 | C2 | R240 | *B1 | R333 | A2 | | |
| R135 | C2 | R241 | *B1 | R334 | A2 | | |
| R136 | C2 | R242 | *B2 | R335 | A2 | | |
| R137 | C2 | R243 | *A1 | R336 | A2 | | |
| R138 | *C2 | R244 | *A1 | R337 | A2 | | |
| R139 | *C2 | R245 | *A1 | R338 | A2 | | |
| R140 | C1 | R246 | *A1 | R339 | A2 | | |
| R141 | C1 | R247 | *A1 | R340 | *A1 | | |
| R142 | C1 | R248 | *A1 | R341 | *A1 | | |
| R143 | C1 | R249 | *B2 | R342 | *B2 | | |
| R144 | C1 | R250 | *B1 | R343 | *A1 | | |
| R145 | C1 | R251 | *B1 | R344 | *B1 | | |
| R146 | C1 | R252 | *A1 | R345 | *B1 | | |
| R147 | C1 | R253 | *B1 | R346 | *A1 | | |
| R148 | C1 | R254 | B2 | R347 | *A1 | | |
| R149 | C1 | R255 | *B2 | R348 | *C1 | | |
| R150 | B1 | R256 | B2 | R349 | *C1 | | |
| R151 | B1 | R257 | *B2 | R350 | *A1 | | |
| R153 | C1 | R258 | *B2 | R351 | *A1 | | |
| R155 | B2 | R259 | *B2 | R352 | *A1 | | |
| R156 | B2 | R260 | B2 | R353 | *A1 | | |
| R157 | C2 | R261 | B2 | R354 | *A1 | | |
| R158 | C2 | R262 | *B2 | R355 | *A1 | | |
| R159 | C2 | R263 | *B2 | R356 | *A1 | | |
| R160 | C2 | R264 | *A2 | R357 | *A1 | | |
| R161 | C2 | R265 | B2 | R358 | *A1 | | |
| R162 | C2 | R266 | B2 | R359 | *A1 | | |
| R163 | C2 | R267 | B2 | R360 | *A1 | | |
| R164 | C2 | R268 | B2 | R361 | *A1 | | |
| R165 | C2 | R269 | B2 | R362 | *A1 | | |
| R166 | C2 | R270 | B2 | R363 | B2 | | |
| R167 | C2 | R271 | A2 | R364 | B2 | | |
| R168 | C2 | R272 | A2 | R365 | B2 | | |
| R169 | C2 | R273 | *A2 | R366 | B2 | | |
| R170 | C2 | R274 | *B2 | R367 | A2 | | |
| R171 | C1 | R275 | B2 | R368 | A2 | | |
| R172 | C1 | R276 | *B2 | R369 | A2 | | |
| R173 | C1 | R277 | B2 | R370 | A2 | | |
| R174 | C1 | R278 | B2 | R371 | A2 | | |
| R175 | C1 | R279 | B2 | R372 | A2 | | |
| R176 | C1 | R280 | A2 | R373 | A2 | | |
| R177 | C1 | R281 | A2 | R374 | A2 | | |
| R178 | C1 | R282 | B2 | R375 | B1 | | |
| R179 | C1 | R283 | B2 | R376 | *A2 | | |
| R180 | C1 | R284 | B2 | R377 | B2 | | |
| R181 | C1 | R285 | B2 | R378 | B2 | | |
| R182 | C1 | R286 | *A2 | R379 | A2 | | |
| R183 | C1 | R288 | A2 | R380 | A2 | | |
| R184 | C1 | R289 | *A2 | R381 | A2 | | |
| R185 | C1 | R290 | A2 | R382 | A2 | | |
| R190 | B2 | R291 | *A2 | | | | |
| R196 | C2 | R292 | *B2 | RB1 | B2 | | |

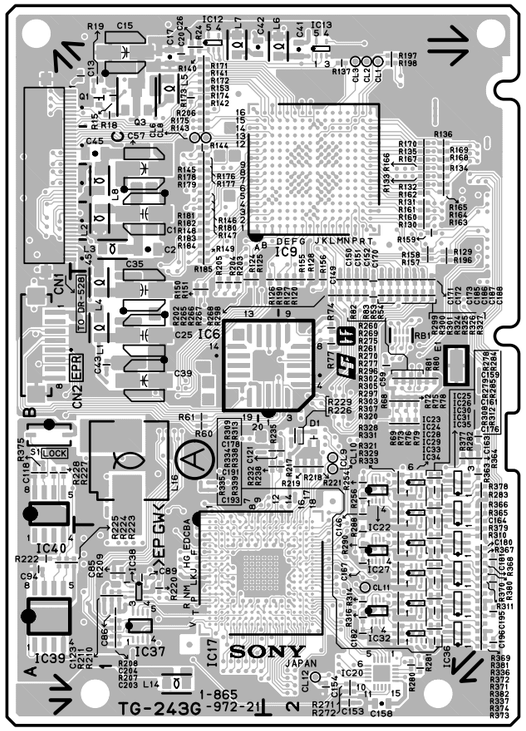TG-243 (1-865-972-22)

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| C1 | C1 | C93 | *A2 | C185 | B2 | L3 | C1 |
| C2 | C1 | C94 | A1 | C186 | B2 | L4 | B1 |
| C3 | *C1 | C95 | *B1 | C187 | B2 | L5 | C1 |
| C4 | *C1 | C96 | *B2 | C188 | B2 | L6 | C2 |
| C5 | *C1 | C97 | *A1 | C189 | *A2 | L7 | C1 |
| C6 | *C1 | C98 | *A1 | C190 | *A2 | L8 | C1 |
| C7 | *C1 | C99 | *A1 | C191 | A2 | L9 | *B1 |
| C8 | *C1 | C100 | *B1 | C192 | *A2 | L10 | *C2 |
| C9 | *C1 | C101 | *B1 | C193 | A2 | L11 | *C2 |
| C10 | *C1 | C102 | *B1 | C194 | *A2 | L12 | *C1 |
| C11 | *C1 | C103 | *B1 | C195 | A2 | L13 | *C1 |
| C12 | *C1 | C104 | *B1 | C196 | A2 | L14 | A1 |
| C13 | C1 | C105 | *A1 | C197 | *B1 | L15 | *B1 |
| C14 | *C1 | C106 | *A1 | C198 | *B2 | L16 | B1 |
| C15 | C1 | C107 | *A1 | C199 | *B1 | L17 | *B1 |
| C16 | *C1 | C108 | *B1 | C200 | *B1 | | |
| C17 | C1 | C109 | *A2 | C201 | *B1 | Q1 | C1 |
| C18 | *C1 | C110 | *A1 | C202 | *A2 | Q2 | *C1 |
| C19 | *C1 | C111 | *A1 | C203 | A1 | Q3 | C1 |
| C20 | C1 | C112 | *A1 | C204 | A1 | Q4 | *C1 |
| C21 | *C1 | C113 | *A1 | C205 | *C1 | Q5 | *C1 |
| C22 | *C1 | C114 | *A1 | C206 | *A2 | Q6 | *C1 |
| C23 | *C1 | C115 | *B1 | C207 | *A2 | Q7 | *B1 |
| C24 | *C1 | C116 | *A1 | C208 | *B2 | Q8 | *B1 |
| C25 | B1 | C117 | *A2 | C209 | *A2 | Q9 | *B1 |
| C26 | C1 | C118 | B1 | C210 | *A2 | Q10 | *B1 |
| C27 | *B1 | C119 | *B1 | | | Q11 | *C1 |
| C28 | *B1 | C120 | *B1 | CL1 | C2 | Q12 | *C1 |
| C29 | *B1 | C121 | B2 | CL2 | C2 | | |
| C30 | *C1 | C122 | *B1 | CL3 | C2 | R1 | *C1 |
| C31 | *B1 | C123 | A1 | CL6 | C1 | R2 | *C1 |
| C32 | *C2 | C124 | *B2 | CL8 | C1 | R3 | *C1 |
| C33 | *C2 | C125 | *B1 | CL9 | B2 | R4 | *C1 |
| C34 | *B1 | C126 | *B1 | CL10 | B2 | R5 | *C1 |
| C35 | B1 | C127 | *B1 | CL11 | A2 | R6 | *C1 |
| C36 | *B2 | C128 | *B2 | CL12 | A2 | R7 | *C1 |
| C37 | *C2 | C129 | *A1 | | | R8 | *C1 |
| C38 | *C1 | C130 | *A1 | CN1 | C1 | R9 | *C1 |
| C39 | B1 | C131 | *A1 | CN2 | B1 | R10 | *C1 |
| C40 | *B1 | C132 | *A1 | CN3 | *C2 | R11 | *C1 |
| C41 | C2 | C133 | *B1 | | | R12 | *C1 |
| C42 | C1 | C134 | *A1 | D1 | B2 | R13 | *C1 |
| C43 | B1 | C135 | *A1 | | | R14 | *B1 |
| C44 | *B1 | C136 | *A1 | E1 | B2 | R15 | C1 |
| C45 | C1 | C137 | *A1 | | | R16 | *C1 |
| C46 | *B2 | C138 | *B1 | IC1 | *C1 | R17 | *C1 |
| C47 | *B2 | C139 | *B1 | IC2 | *C1 | R18 | C1 |
| C48 | *B2 | C140 | *B1 | IC3 | *C1 | R19 | C1 |
| C49 | *C1 | C141 | *A2 | IC4 | *B1 | R20 | *C1 |
| C50 | *B2 | C142 | *A2 | IC5 | *B2 | R21 | *C1 |
| C51 | *B1 | C143 | *A2 | IC6 | B2 | R22 | *C1 |
| C52 | *B2 | C144 | *A1 | IC7 | *B2 | R23 | *C1 |
| C53 | *B2 | C145 | *A1 | IC8 | *C2 | R24 | C1 |
| C54 | *C1 | C146 | B2 | IC9 | C2 | R25 | *C1 |
| C55 | *B1 | C147 | *B2 | IC10 | *C1 | R26 | *C1 |
| C56 | *B1 | C148 | *B2 | IC11 | *C1 | R27 | *C1 |
| C57 | C1 | C149 | B2 | IC12 | C1 | R28 | *C1 |
| C58 | *C1 | C150 | B2 | IC13 | C2 | R29 | *C1 |
| C59 | B2 | C151 | B2 | IC14 | *C1 | R30 | *B1 |
| C60 | *C2 | C152 | B2 | IC15 | *B1 | R31 | *B1 |
| C61 | *C2 | C153 | A2 | IC16 | *C1 | R32 | *C1 |
| C62 | *C2 | C154 | A2 | IC17 | A1 | R33 | *C1 |
| C63 | *C1 | C155 | *B2 | IC18 | *A1 | R34 | *B1 |
| C64 | *C2 | C156 | *B2 | IC19 | *A2 | R35 | *C1 |
| C65 | *C2 | C157 | *A2 | IC20 | A2 | R36 | *B1 |
| C66 | *C2 | C158 | A2 | IC21 | *A2 | R37 | *B1 |
| C67 | *C2 | C159 | B2 | IC22 | B2 | R38 | *C1 |
| C68 | *C2 | C160 | *B2 | IC23 | B2 | R39 | *C2 |
| C69 | *C2 | C161 | B2 | IC24 | B2 | R40 | *C2 |
| C70 | *C2 | C162 | *B2 | IC25 | B2 | R41 | *B1 |
| C71 | *C1 | C163 | B2 | IC26 | B2 | R42 | *B1 |
| C72 | *C1 | C164 | B2 | IC27 | A2 | R43 | *B1 |
| C73 | *C1 | C165 | *A2 | IC28 | A2 | R44 | *B1 |
| C74 | *C2 | C166 | *A2 | IC29 | A2 | R45 | *B1 |
| C75 | *C1 | C167 | A2 | IC30 | A2 | R46 | *B1 |
| C76 | *C2 | C168 | *A2 | IC31 | A2 | R47 | *B2 |
| C77 | *C2 | C169 | *A2 | IC32 | A2 | R48 | *B2 |
| C78 | *C2 | C170 | B2 | IC33 | A2 | R49 | *B2 |
| C79 | *C2 | C171 | B2 | IC34 | A2 | R50 | *B2 |
| C80 | *C2 | C172 | B2 | IC35 | A2 | R51 | *B2 |
| C81 | *C2 | C173 | B2 | IC36 | A2 | R52 | *B2 |
| C82 | *C2 | C174 | *A2 | IC37 | A1 | R53 | B2 |
| C83 | *C2 | C175 | *A2 | IC38 | A1 | R54 | B2 |
| C84 | *C2 | C176 | A2 | IC39 | A1 | R55 | *B2 |
| C85 | A1 | C177 | *A2 | IC40 | B1 | R56 | *B2 |
| C86 | A1 | C178 | A2 | IC41 | *A1 | R57 | *B2 |
| C87 | *A1 | C179 | *A2 | IC42 | *B1 | R58 | *B2 |
| C88 | *A1 | C180 | A2 | IC43 | *B2 | R59 | *B2 |
| C89 | A1 | C181 | A2 | IC44 | *A2 | R60 | B1 |
| C90 | *A2 | C182 | A2 | | | R61 | B1 |
| C91 | *A2 | C183 | *A2 | L1 | B1 | R62 | *C1 |
| C92 | *A1 | C184 | *A2 | L2 | C1 | R63 | *C1 |

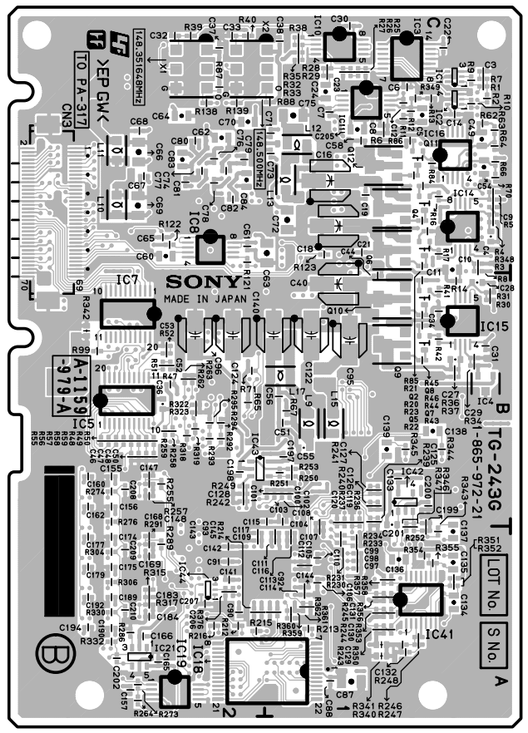


**TG-243** -A SIDE-
SUFFIX: -22




**TG-243** -B SIDE-
SUFFIX: -22

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| R64 | *C1 | R198 | C2 | R294 | *B2 | S1 | B1 |
| R65 | *B2 | R202 | B2 | R295 | *B2 | | |
| R66 | *C1 | R203 | B1 | R296 | A2 | X1 | *C2 |
| R67 | *B1 | R204 | B1 | R297 | A2 | X2 | *C2 |
| R68 | B2 | R205 | B1 | R298 | B2 | | |
| R69 | B2 | R206 | C1 | R299 | B2 | *:B SIDE | |
| R70 | *C1 | R207 | A1 | R300 | B2 | | |
| R71 | *B2 | R208 | A1 | R301 | B2 | | |
| R72 | B2 | R209 | A1 | R302 | A2 | | |
| R73 | B2 | R210 | A1 | R303 | A2 | | |
| R74 | B2 | R211 | A1 | R304 | *A2 | | |
| R75 | B2 | R212 | *A2 | R305 | A2 | | |
| R76 | B2 | R213 | *A1 | R306 | *A2 | | |
| R77 | B2 | R214 | *A1 | R307 | A2 | | |
| R78 | B2 | R215 | *A2 | R308 | A2 | | |
| R79 | B2 | R216 | *A2 | R309 | A2 | | |
| R80 | B2 | R217 | B2 | R310 | A2 | | |
| R81 | B2 | R218 | B2 | R311 | A2 | | |
| R82 | B2 | R219 | B2 | R312 | A2 | | |
| R83 | B2 | R220 | A1 | R313 | A2 | | |
| R84 | *C1 | R221 | B2 | R314 | A2 | | |
| R85 | *C1 | R222 | A1 | R315 | *A2 | | |
| R86 | *C1 | R223 | A1 | R316 | A2 | | |
| R87 | *C2 | R224 | A1 | R317 | *A2 | | |
| R88 | *C1 | R225 | A1 | R318 | *B2 | | |
| R99 | *B2 | R226 | B2 | R319 | *B2 | | |
| R120 | B2 | R227 | B1 | R320 | A2 | | |
| R121 | *C2 | R228 | B1 | R321 | A2 | | |
| R122 | *C2 | R229 | B2 | R322 | *B2 | | |
| R123 | *C1 | R230 | *A1 | R323 | *B2 | | |
| R124 | B1 | R231 | *A1 | R324 | B2 | | |
| R125 | B1 | R232 | B2 | R325 | B2 | | |
| R126 | B2 | R233 | *A1 | R326 | B2 | | |
| R127 | B2 | R234 | *A1 | R327 | B2 | | |
| R128 | B2 | R235 | B2 | R328 | A2 | | |
| R129 | C2 | R236 | *B1 | R329 | A2 | | |
| R130 | C2 | R237 | *B1 | R330 | *A2 | | |
| R131 | C2 | R238 | B2 | R331 | A2 | | |
| R132 | C2 | R239 | *B1 | R332 | *A2 | | |
| R133 | C2 | R240 | *B1 | R333 | A2 | | |
| R134 | C2 | R241 | *B1 | R334 | A2 | | |
| R135 | C2 | R242 | *B2 | R335 | A2 | | |
| R136 | C2 | R243 | *A1 | R336 | A2 | | |
| R137 | C2 | R244 | *A1 | R337 | A2 | | |
| R138 | *C2 | R245 | *A1 | R338 | A2 | | |
| R140 | C1 | R246 | *A1 | R339 | A2 | | |
| R141 | C1 | R247 | *A1 | R340 | *A1 | | |
| R142 | C1 | R248 | *A1 | R341 | *A1 | | |
| R143 | C1 | R249 | *B2 | R342 | *B2 | | |
| R144 | C1 | R250 | *B1 | R343 | *A1 | | |
| R145 | C1 | R251 | *B1 | R344 | *B1 | | |
| R146 | C1 | R252 | *A1 | R345 | *B1 | | |
| R147 | C1 | R253 | *B1 | R346 | *A1 | | |
| R148 | C1 | R254 | B2 | R347 | *A1 | | |
| R149 | C1 | R255 | *B2 | R348 | *C1 | | |
| R150 | B1 | R256 | B2 | R349 | *C1 | | |
| R151 | B1 | R257 | *B2 | R350 | *A1 | | |
| R153 | C1 | R258 | *B2 | R351 | *A1 | | |
| R155 | B2 | R259 | *B2 | R352 | *A1 | | |
| R156 | B2 | R260 | B2 | R353 | *A1 | | |
| R157 | C2 | R261 | B2 | R354 | *A1 | | |
| R158 | C2 | R262 | *B2 | R355 | *A1 | | |
| R159 | C2 | R263 | *B2 | R356 | *A1 | | |
| R160 | C2 | R264 | *A2 | R357 | *A1 | | |
| R161 | C2 | R265 | B2 | R358 | *A1 | | |
| R162 | C2 | R266 | B2 | R359 | *A1 | | |
| R163 | C2 | R267 | B2 | R360 | *A1 | | |
| R164 | C2 | R268 | B2 | R361 | *A1 | | |
| R165 | C2 | R269 | B2 | R362 | *A1 | | |
| R166 | C2 | R270 | B2 | R363 | B2 | | |
| R167 | C2 | R271 | A2 | R364 | B2 | | |
| R168 | C2 | R272 | A2 | R365 | B2 | | |
| R169 | C2 | R273 | *A2 | R366 | B2 | | |
| R170 | C2 | R274 | *B2 | R367 | A2 | | |
| R171 | C1 | R275 | B2 | R368 | A2 | | |
| R172 | C1 | R276 | *B2 | R369 | A2 | | |
| R173 | C1 | R277 | B2 | R370 | A2 | | |
| R174 | C1 | R278 | B2 | R371 | A2 | | |
| R175 | C1 | R279 | B2 | R372 | A2 | | |
| R176 | C1 | R280 | A2 | R373 | A2 | | |
| R177 | C1 | R281 | A2 | R374 | A2 | | |
| R178 | C1 | R282 | B2 | R375 | B1 | | |
| R179 | C1 | R283 | B2 | R376 | *A2 | | |
| R180 | C1 | R284 | B2 | R377 | B2 | | |
| R181 | C1 | R285 | B2 | R378 | B2 | | |
| R182 | C1 | R286 | *A2 | R379 | A2 | | |
| R183 | C1 | R288 | A2 | R380 | A2 | | |
| R184 | C1 | R289 | *A2 | R381 | A2 | | |
| R185 | C1 | R290 | A2 | R382 | A2 | | |
| R190 | B2 | R291 | *A2 | | | | |
| R196 | C2 | R292 | *B2 | RB1 | B2 | | |
| R197 | C2 | R293 | *B2 | | | | |

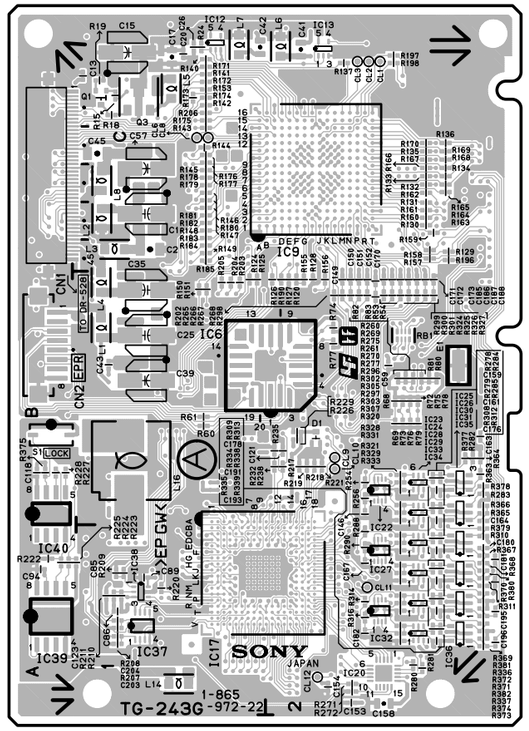TG-243 (1-865-972-23)

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| C1 | C1 | C93 | *A2 | C185 | B2 | L1 | B1 |
| C2 | C1 | C94 | A1 | C186 | B2 | L2 | C1 |
| C3 | *C1 | C95 | *B1 | C187 | B2 | L3 | C1 |
| C4 | *C1 | C96 | *B2 | C188 | B2 | L4 | B1 |
| C5 | *C1 | C97 | *A1 | C189 | *A2 | L5 | C1 |
| C6 | *C1 | C98 | *A1 | C190 | *A2 | L6 | C2 |
| C7 | *C1 | C99 | *A1 | C191 | A2 | L7 | C1 |
| C8 | *C1 | C100 | *B1 | C192 | *A2 | L8 | C1 |
| C9 | *C1 | C101 | *B1 | C193 | A2 | L9 | *B1 |
| C10 | *C1 | C102 | *B1 | C194 | *A2 | L10 | *C2 |
| C11 | *C1 | C103 | *B1 | C195 | A2 | L11 | *C2 |
| C12 | *C1 | C104 | *B1 | C196 | A2 | L12 | *C1 |
| C13 | C1 | C105 | *A1 | C197 | *B1 | L13 | *C1 |
| C14 | *C1 | C106 | *A1 | C198 | *B2 | L14 | A1 |
| C15 | C1 | C107 | *A1 | C199 | *A1 | L15 | *B1 |
| C16 | *C1 | C108 | *B1 | C200 | B1 | L16 | B1 |
| C17 | C1 | C109 | *A2 | C201 | *A1 | L17 | *B1 |
| C18 | *C1 | C110 | *A1 | C202 | *A2 | | |
| C19 | *C1 | C111 | *A1 | C203 | A1 | Q1 | C1 |
| C20 | C1 | C112 | *A1 | C204 | A1 | Q2 | *C1 |
| C21 | *C1 | C113 | *A1 | C205 | *C1 | Q3 | C1 |
| C22 | *C1 | C114 | *A1 | C206 | *A2 | Q4 | *C1 |
| C23 | *C1 | C115 | *B1 | C207 | *A2 | Q5 | *C1 |
| C24 | *C1 | C116 | *A1 | C208 | *B2 | Q6 | *C1 |
| C25 | B1 | C117 | *A2 | C209 | *A2 | Q7 | *B1 |
| C26 | C1 | C118 | B1 | C210 | *A2 | Q8 | *B1 |
| C27 | *B1 | C119 | *B1 | C211 | B2 | Q9 | *B1 |
| C28 | *B1 | C120 | *B1 | C212 | B2 | Q10 | *B1 |
| C29 | *B1 | C121 | B2 | | | Q11 | *C1 |
| C30 | *C1 | C122 | *B1 | CL1 | C2 | Q12 | *C1 |
| C31 | *B1 | C123 | A1 | CL2 | C2 | | |
| C32 | *C2 | C124 | *B2 | CL3 | C2 | R1 | *C1 |
| C33 | *C2 | C125 | *B1 | CL6 | C1 | R2 | *C1 |
| C34 | *B1 | C126 | *B1 | CL8 | C1 | R3 | *C1 |
| C35 | B1 | C127 | *B1 | CL9 | B2 | R4 | *C1 |
| C36 | *B2 | C128 | *B2 | CL10 | B2 | R5 | *C1 |
| C37 | *C2 | C129 | *A1 | CL11 | A2 | R6 | *C1 |
| C38 | *C1 | C130 | *A1 | CL12 | A2 | R7 | *C1 |
| C39 | B1 | C131 | *A1 | | | R8 | *C1 |
| C40 | *B1 | C132 | *A1 | CN1 | C1 | R9 | *C1 |
| C41 | C2 | C133 | B1 | CN2 | B1 | R10 | *C1 |
| C42 | C1 | C134 | *A1 | CN3 | *C2 | R11 | *C1 |
| C43 | B1 | C135 | *A1 | | | R12 | *C1 |
| C44 | *B1 | C136 | *A1 | D1 | B2 | R13 | *C1 |
| C45 | C1 | C137 | *B1 | | | R14 | *B1 |
| C46 | *B2 | C138 | *B1 | E1 | B2 | R15 | C1 |
| C47 | *B2 | C139 | *B1 | | | R16 | *C1 |
| C48 | *B2 | C140 | *B1 | IC1 | *C1 | R17 | *C1 |
| C49 | *C1 | C141 | *A2 | IC2 | *C1 | R18 | C1 |
| C50 | *B2 | C142 | *A2 | IC3 | *C1 | R19 | C1 |
| C51 | *B1 | C143 | *A2 | IC4 | *B1 | R20 | *C1 |
| C52 | *B2 | C144 | *A1 | IC5 | *B2 | R21 | *C1 |
| C53 | *B2 | C145 | *A1 | IC6 | B2 | R22 | *C1 |
| C54 | *C1 | C146 | B2 | IC7 | *B2 | R23 | *C1 |
| C55 | *B1 | C147 | *B2 | IC8 | *C2 | R24 | C1 |
| C56 | *B1 | C148 | *B2 | IC9 | C2 | R25 | *C1 |
| C57 | C1 | C149 | B2 | IC10 | *C1 | R26 | *C1 |
| C58 | *C1 | C150 | B2 | IC11 | *C1 | R27 | *C1 |
| C59 | B2 | C151 | B2 | IC12 | C1 | R28 | *C1 |
| C60 | *C2 | C152 | B2 | IC13 | C2 | R29 | *C1 |
| C61 | *C2 | C153 | A2 | IC14 | *C1 | R30 | *B1 |
| C62 | *C2 | C154 | A2 | IC15 | *B1 | R31 | *B1 |
| C63 | *C1 | C155 | *B2 | IC16 | *C1 | R32 | *C1 |
| C64 | *C2 | C156 | *B2 | IC17 | A1 | R33 | *C1 |
| C65 | *C2 | C157 | *A2 | IC18 | *A1 | R34 | *B1 |
| C66 | *C2 | C158 | A2 | IC19 | *A2 | R35 | *C1 |
| C67 | *C2 | C159 | B2 | IC20 | A2 | R36 | *B1 |
| C68 | *C2 | C160 | *B2 | IC21 | *A2 | R37 | *B1 |
| C69 | *C2 | C161 | B2 | IC22 | B2 | R38 | *C1 |
| C70 | *C2 | C162 | *B2 | IC23 | B2 | R39 | *C2 |
| C71 | *C1 | C163 | B2 | IC24 | B2 | R40 | *C2 |
| C72 | *C1 | C164 | B2 | IC25 | B2 | R41 | *B1 |
| C73 | *C1 | C165 | *A2 | IC26 | B2 | R42 | *B1 |
| C74 | *C2 | C166 | *A2 | IC27 | A2 | R43 | *B1 |
| C75 | *C1 | C167 | A2 | IC28 | A2 | R44 | *B1 |
| C76 | *C2 | C168 | *A2 | IC29 | A2 | R45 | *B1 |
| C77 | *C2 | C169 | *A2 | IC30 | A2 | R46 | *B1 |
| C78 | *C2 | C170 | B2 | IC31 | A2 | R47 | *B2 |
| C79 | *C2 | C171 | B2 | IC32 | A2 | R48 | *B2 |
| C80 | *C2 | C172 | B2 | IC33 | A2 | R49 | *B2 |
| C81 | *C2 | C173 | B2 | IC34 | A2 | R50 | *B2 |
| C82 | *C2 | C174 | *A2 | IC35 | A2 | R51 | *B2 |
| C83 | *C2 | C175 | *A2 | IC36 | A2 | R52 | *B2 |
| C84 | *C2 | C176 | A2 | IC37 | A1 | R53 | B2 |
| C85 | A1 | C177 | *A2 | IC38 | A1 | R54 | B2 |
| C86 | A1 | C178 | A2 | IC39 | A1 | R55 | *B2 |
| C87 | *A1 | C179 | *A2 | IC40 | B1 | R56 | *B2 |
| C88 | *A1 | C180 | A2 | IC41 | *A1 | R57 | *B2 |
| C89 | A1 | C181 | A2 | IC42 | *B1 | R58 | *B2 |
| C90 | *A2 | C182 | A2 | IC43 | *B2 | R59 | *B2 |
| C91 | *A2 | C183 | *A2 | IC44 | *A2 | R60 | B1 |
| C92 | *A1 | C184 | *A2 | | | R61 | B1 |

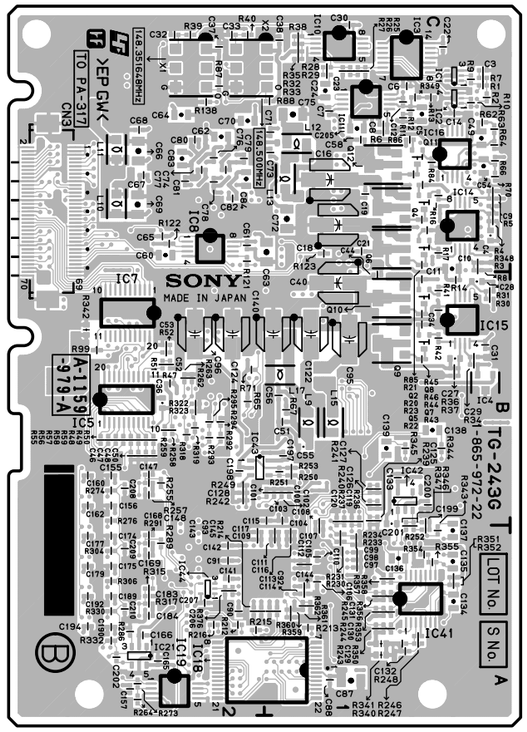


**TG-243** -A SIDE-
SUFFIX: -23




**TG-243** -B SIDE-
SUFFIX: -23

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| R62 | *C1 | R196 | C2 | R292 | *B2 | R384 | *B1 |
| R63 | *C1 | R197 | C2 | R293 | *B2 | R385 | *B1 |
| R64 | *C1 | R198 | C2 | R294 | *B2 | R386 | *A1 |
| R65 | *B2 | R202 | B2 | R295 | *B2 | R387 | *B1 |
| R66 | *C1 | R203 | B1 | R296 | A2 | R388 | *B1 |
| R67 | *B1 | R204 | B1 | R297 | A2 | R389 | *B1 |
| R68 | B2 | R205 | B1 | R298 | B2 | R390 | *B1 |
| R69 | B2 | R206 | C1 | R299 | B2 | R391 | *B1 |
| R70 | *C1 | R207 | A1 | R300 | B2 | R392 | *B1 |
| R71 | *B2 | R208 | A1 | R301 | B2 | R393 | *B1 |
| R72 | B2 | R209 | A1 | R302 | A2 | R394 | *B1 |
| R73 | B2 | R210 | A1 | R303 | A2 | | |
| R74 | B2 | R211 | A1 | R304 | *A2 | RB1 | B2 |
| R75 | B2 | R212 | *A2 | R305 | A2 | | |
| R76 | B2 | R213 | *A1 | R306 | *A2 | S1 | B1 |
| R77 | B2 | R214 | *A1 | R307 | A2 | | |
| R78 | B2 | R215 | *A2 | R308 | A2 | X1 | *C2 |
| R79 | B2 | R216 | *A2 | R309 | A2 | X2 | *C2 |
| R80 | B2 | R217 | B2 | R310 | A2 | | |
| R81 | B2 | R218 | B2 | R311 | A2 | *:B SIDE | |
| R82 | B2 | R219 | B2 | R312 | A2 | | |
| R83 | B2 | R220 | A1 | R313 | A2 | | |
| R84 | *C1 | R221 | B2 | R314 | A2 | | |
| R85 | *C1 | R222 | A1 | R315 | *A2 | | |
| R86 | *C1 | R223 | A1 | R316 | A2 | | |
| R87 | *C2 | R224 | A1 | R317 | *A2 | | |
| R88 | *C1 | R225 | A1 | R318 | *B2 | | |
| R99 | *B2 | R226 | B2 | R319 | *B2 | | |
| R120 | B2 | R227 | B1 | R320 | A2 | | |
| R121 | *C2 | R228 | B1 | R321 | A2 | | |
| R122 | *C2 | R229 | B2 | R322 | *B2 | | |
| R123 | *C1 | R230 | *A1 | R323 | *B2 | | |
| R124 | B1 | R231 | *A1 | R324 | B2 | | |
| R125 | B1 | R232 | B2 | R325 | B2 | | |
| R126 | B2 | R233 | *A1 | R326 | B2 | | |
| R127 | B2 | R234 | *A1 | R327 | B2 | | |
| R128 | B2 | R235 | B2 | R328 | A2 | | |
| R129 | C2 | R236 | *B1 | R329 | A2 | | |
| R130 | C2 | R237 | *B1 | R330 | *A2 | | |
| R131 | C2 | R238 | B2 | R331 | A2 | | |
| R132 | C2 | R239 | *B1 | R332 | *A2 | | |
| R133 | C2 | R240 | *B1 | R333 | A2 | | |
| R134 | C2 | R241 | *B1 | R334 | A2 | | |
| R135 | C2 | R242 | *B2 | R335 | A2 | | |
| R136 | C2 | R243 | *A1 | R336 | A2 | | |
| R137 | C2 | R244 | *A1 | R337 | A2 | | |
| R138 | *C2 | R245 | *A1 | R338 | A2 | | |
| R140 | C1 | R246 | *A1 | R339 | A2 | | |
| R141 | C1 | R247 | *A1 | R340 | *A1 | | |
| R142 | C1 | R248 | *A1 | R341 | *A1 | | |
| R143 | C1 | R249 | *B2 | R342 | *B2 | | |
| R144 | C1 | R250 | *B1 | R343 | *A1 | | |
| R145 | C1 | R251 | *B1 | R344 | *B1 | | |
| R146 | C1 | R252 | *A1 | R345 | *B1 | | |
| R147 | C1 | R253 | *B1 | R346 | *A1 | | |
| R148 | C1 | R254 | B2 | R347 | *A1 | | |
| R149 | C1 | R255 | *B2 | R348 | *C1 | | |
| R150 | B1 | R256 | B2 | R349 | *C1 | | |
| R151 | B1 | R257 | *B2 | R350 | *A1 | | |
| R153 | C1 | R258 | *B2 | R351 | *A1 | | |
| R155 | B2 | R259 | *B2 | R352 | *A1 | | |
| R156 | B2 | R260 | B2 | R353 | *A1 | | |
| R157 | C2 | R261 | B2 | R354 | *A1 | | |
| R158 | C2 | R262 | *B2 | R355 | *A1 | | |
| R159 | C2 | R263 | *B2 | R356 | *A1 | | |
| R160 | C2 | R264 | *A2 | R357 | *A1 | | |
| R161 | C2 | R265 | B2 | R358 | *A1 | | |
| R162 | C2 | R266 | B2 | R359 | *A1 | | |
| R163 | C2 | R267 | B2 | R360 | *A1 | | |
| R164 | C2 | R268 | B2 | R361 | *A1 | | |
| R165 | C2 | R269 | B2 | R362 | *A1 | | |
| R166 | C2 | R270 | B2 | R363 | B2 | | |
| R167 | C2 | R271 | A2 | R364 | B2 | | |
| R168 | C2 | R272 | A2 | R365 | B2 | | |
| R169 | C2 | R273 | *A2 | R366 | B2 | | |
| R170 | C2 | R274 | *B2 | R367 | A2 | | |
| R171 | C1 | R275 | B2 | R368 | A2 | | |
| R172 | C1 | R276 | *B2 | R369 | A2 | | |
| R173 | C1 | R277 | B2 | R370 | A2 | | |
| R174 | C1 | R278 | B2 | R371 | A2 | | |
| R175 | C1 | R279 | B2 | R372 | A2 | | |
| R176 | C1 | R280 | A2 | R373 | A2 | | |
| R177 | C1 | R281 | A2 | R374 | A2 | | |
| R178 | C1 | R282 | B2 | R375 | B1 | | |
| R179 | C1 | R283 | B2 | R376 | *A2 | | |
| R180 | C1 | R284 | B2 | R377 | B2 | | |
| R181 | C1 | R285 | B2 | R378 | B2 | | |
| R182 | C1 | R286 | *A2 | R379 | A2 | | |
| R183 | C1 | R288 | A2 | R380 | A2 | | |
| R184 | C1 | R289 | *A2 | R381 | A2 | | |
| R185 | C1 | R290 | A2 | R382 | A2 | | |
| R190 | B2 | R291 | *A2 | R383 | *B1 | | |

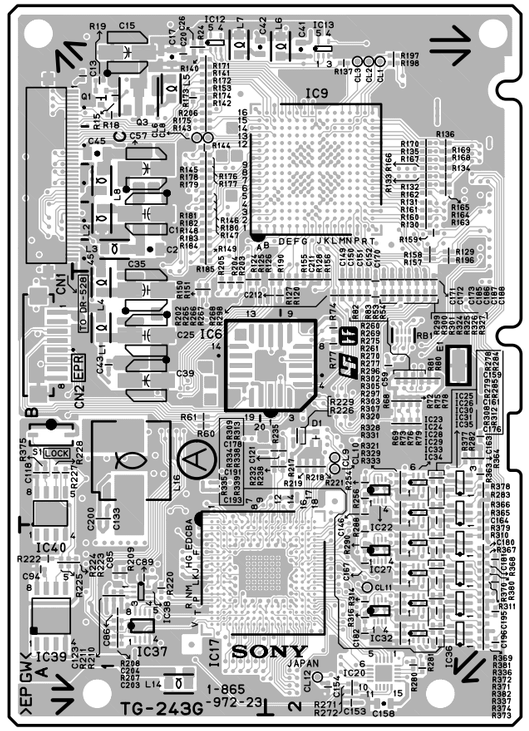TG-247BG (1-865-972-22)

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| C1 | C1 | C93 | *A2 | C185 | *A2 | IC34 | A2 |
| C2 | C1 | C94 | A1 | C186 | A2 | IC35 | A2 |
| C3 | *C1 | C95 | *B1 | C187 | *A2 | IC36 | A2 |
| C4 | *C1 | C96 | *B2 | C188 | A2 | IC37 | A1 |
| C5 | *C1 | C97 | *A1 | C189 | A2 | IC38 | A1 |
| C6 | *C1 | C98 | *A1 | C190 | *B1 | IC39 | A1 |
| C7 | *C1 | C99 | *A1 | C191 | *B2 | IC40 | B1 |
| C8 | *C1 | C100 | *B1 | C192 | *B1 | IC41 | *A1 |
| C9 | *C1 | C101 | *B1 | C193 | *B1 | IC42 | *A1 |
| C10 | *B1 | C102 | *B1 | C194 | *A1 | IC43 | *B2 |
| C11 | *B1 | C103 | *B1 | C195 | *A1 | IC44 | *B1 |
| C12 | *C1 | C104 | *A1 | C196 | *A1 | IC45 | *B1 |
| C13 | C1 | C105 | *A1 | C197 | *B1 | IC46 | *B1 |
| C14 | *C1 | C106 | *A1 | C198 | *A1 | IC47 | *A2 |
| C15 | C1 | C107 | *A1 | C199 | A1 | | |
| C16 | *C1 | C108 | *A1 | C200 | A1 | L1 | B1 |
| C17 | C1 | C109 | *A2 | C201 | *A2 | L2 | C1 |
| C18 | *C1 | C110 | *A1 | C202 | B1 | L3 | C1 |
| C19 | *C1 | C111 | *A1 | C203 | *B1 | L4 | B1 |
| C20 | C1 | C112 | *A1 | C204 | B1 | L5 | C1 |
| C21 | *C1 | C113 | *A1 | C205 | *B1 | L6 | C2 |
| C22 | *C1 | C114 | *A1 | C206 | *B1 | L7 | C1 |
| C23 | *C1 | C115 | *A1 | C207 | *B1 | L8 | C1 |
| C24 | *C1 | C116 | *A1 | C208 | *B1 | L9 | *B1 |
| C25 | B1 | C117 | *A2 | C209 | *B1 | L10 | *C2 |
| C26 | C1 | C118 | B1 | C210 | *B1 | L11 | *C2 |
| C27 | *B1 | C119 | *A1 | C211 | *B1 | L12 | *C1 |
| C28 | *B1 | C120 | *A1 | C212 | *B1 | L13 | *C1 |
| C29 | *B1 | C121 | B2 | C213 | *A1 | L14 | A1 |
| C30 | *C1 | C122 | *B1 | C214 | *B1 | L15 | *B1 |
| C31 | *B1 | C123 | A1 | C215 | *B1 | L16 | B1 |
| C32 | *C2 | C124 | *B2 | C216 | *C1 | L17 | *B1 |
| C33 | *C2 | C125 | *B2 | C217 | *B2 | | |
| C34 | *B1 | C126 | *A1 | C218 | *A2 | Q1 | C1 |
| C35 | B1 | C127 | *A1 | C219 | *A2 | Q2 | *C1 |
| C36 | *B2 | C128 | *A1 | C220 | *A2 | Q3 | C1 |
| C37 | *C2 | C129 | *A1 | C221 | *A2 | Q4 | *C1 |
| C38 | *C1 | C130 | *A1 | | | Q5 | *C1 |
| C39 | B1 | C131 | *A1 | CL1 | C2 | Q6 | *C1 |
| C40 | *B1 | C132 | *A1 | CL2 | C2 | Q7 | *B1 |
| C41 | C2 | C133 | *B1 | CL3 | C2 | Q8 | *B1 |
| C42 | C1 | C134 | *A2 | CL4 | C2 | Q9 | *B1 |
| C43 | B1 | C135 | *A2 | CL5 | C2 | Q10 | *B1 |
| C44 | *B1 | C136 | *A2 | CL6 | C2 | Q11 | *C1 |
| C45 | C1 | C137 | *A1 | CL7 | C2 | Q12 | *C1 |
| C46 | *B2 | C138 | *A1 | CL8 | C2 | | |
| C47 | *B2 | C139 | B2 | CL9 | B2 | R1 | *C1 |
| C48 | *B2 | C140 | *B2 | CL10 | B2 | R2 | *C1 |
| C49 | *C1 | C141 | *B2 | CL11 | A2 | R3 | *C1 |
| C50 | *B2 | C142 | B2 | CL12 | A2 | R4 | *C1 |
| C51 | *B1 | C143 | B2 | | | R5 | *C1 |
| C52 | *B2 | C144 | B2 | CN1 | C1 | R6 | *C1 |
| C53 | *B2 | C145 | B2 | CN2 | B1 | R7 | *C1 |
| C54 | *C1 | C146 | A2 | CN3 | *C2 | R8 | *B1 |
| C55 | *B1 | C147 | A2 | | | R9 | *C1 |
| C56 | *B1 | C148 | *B2 | D1 | B2 | R10 | *C1 |
| C57 | C1 | C149 | *B2 | | | R11 | *C1 |
| C58 | *C1 | C150 | *A2 | E1 | B2 | R12 | *C1 |
| C59 | B2 | C151 | A2 | | | R13 | *C1 |
| C60 | *B2 | C152 | B2 | IC1 | *C1 | R14 | *B1 |
| C61 | *C2 | C153 | *B2 | IC2 | *C1 | R15 | C1 |
| C62 | *C2 | C154 | A2 | IC3 | *C1 | R16 | *C1 |
| C63 | *B1 | C155 | *B2 | IC4 | *B1 | R17 | *C1 |
| C64 | *C2 | C156 | B2 | IC5 | *B2 | R18 | C1 |
| C65 | *C2 | C157 | A2 | IC6 | B2 | R19 | C1 |
| C66 | *C2 | C158 | *A2 | IC7 | *B2 | R20 | *C1 |
| C67 | *C2 | C159 | *A2 | IC8 | *C2 | R21 | *C1 |
| C68 | *C2 | C160 | A2 | IC9 | C2 | R22 | *B1 |
| C69 | *C2 | C161 | *A2 | IC10 | *C1 | R23 | *C1 |
| C70 | *C2 | C162 | *A2 | IC11 | *C1 | R24 | C1 |
| C71 | *C1 | C163 | B2 | IC12 | C1 | R25 | *C1 |
| C72 | *C1 | C164 | B2 | IC13 | C2 | R26 | *C1 |
| C73 | *C1 | C165 | B2 | IC14 | *C1 | R27 | *C1 |
| C74 | *C2 | C166 | B2 | IC15 | *B1 | R28 | *C1 |
| C75 | *C1 | C167 | *A2 | IC16 | *C1 | R29 | *C1 |
| C76 | *C2 | C168 | *A2 | IC17 | A1 | R30 | *B1 |
| C77 | *C2 | C169 | A2 | IC18 | *A1 | R31 | *B1 |
| C78 | *C2 | C170 | *A2 | IC19 | *A2 | R32 | *C1 |
| C79 | *C2 | C171 | A2 | IC20 | A2 | R33 | *C1 |
| C80 | *C2 | C172 | *A2 | IC21 | *A2 | R34 | *B1 |
| C81 | *C2 | C173 | A2 | IC22 | B2 | R35 | *C1 |
| C82 | *C2 | C174 | A2 | IC23 | B2 | R36 | *B1 |
| C83 | *C2 | C175 | A2 | IC24 | B2 | R37 | *B1 |
| C84 | *C2 | C176 | *A2 | IC25 | B2 | R38 | *C1 |
| C85 | A1 | C177 | *A2 | IC26 | B2 | R39 | *C2 |
| C86 | A1 | C178 | B2 | IC27 | A2 | R40 | *C2 |
| C87 | *A1 | C179 | B2 | IC28 | A2 | R41 | *B1 |
| C88 | *A1 | C180 | B2 | IC29 | A2 | R42 | *B1 |
| C89 | A1 | C181 | B2 | IC30 | A2 | R43 | *B1 |
| C90 | *A2 | C182 | *A2 | IC31 | A2 | R44 | *B1 |
| C91 | *A2 | C183 | *A2 | IC32 | A2 | R45 | *B1 |
| C92 | *A1 | C184 | A2 | IC33 | A2 | R46 | *B1 |

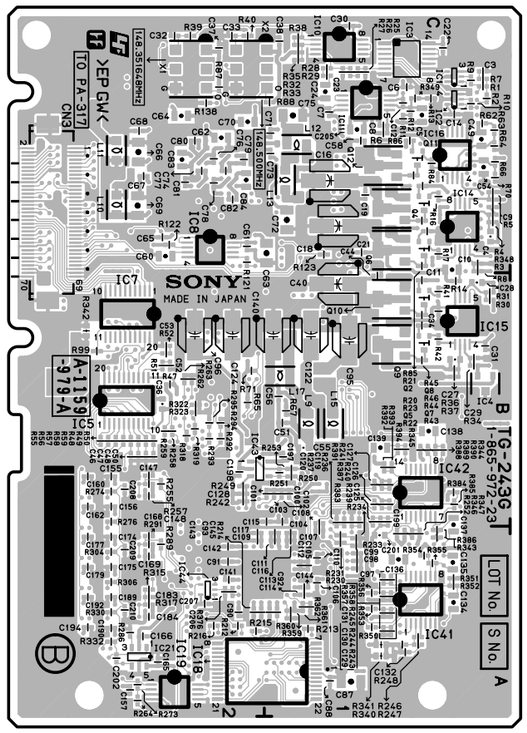


**TG-247** -A SIDE-
SUFFIX: -11




**TG-247** -B SIDE-
SUFFIX: -11

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| R47 | *B2 | R173 | C1 | R276 | A2 | R369 | A2 |
| R48 | *B2 | R174 | C1 | R277 | *A2 | R370 | A2 |
| R49 | *B2 | R175 | C1 | R278 | *B2 | R371 | A2 |
| R50 | *B2 | R176 | C1 | R279 | B2 | R372 | A2 |
| R51 | *B2 | R177 | C1 | R280 | *A2 | R373 | A2 |
| R52 | *B2 | R178 | C1 | R281 | A2 | R374 | A2 |
| R53 | B2 | R179 | C1 | R282 | B2 | R375 | A2 |
| R54 | B2 | R180 | C1 | R283 | B2 | R376 | A2 |
| R55 | *B2 | R181 | C1 | R284 | A2 | R377 | *B1 |
| R56 | *B2 | R182 | C1 | R285 | A2 | R378 | *B1 |
| R57 | *B2 | R183 | C1 | R286 | B2 | R379 | *B1 |
| R58 | *B2 | R184 | C1 | R287 | B2 | R380 | *B1 |
| R59 | *B2 | R185 | C1 | R288 | B2 | R381 | *B1 |
| R60 | B1 | R186 | C1 | R289 | B2 | R382 | *B1 |
| R61 | B1 | R187 | C1 | R290 | *A2 | R383 | *B1 |
| R62 | *C1 | R188 | B1 | R292 | A2 | R384 | *B1 |
| R63 | *C1 | R189 | B1 | R293 | *A2 | R385 | *B1 |
| R64 | *C1 | R190 | *C2 | R294 | *B2 | R386 | *B1 |
| R65 | *B2 | R194 | B2 | R295 | *B2 | R387 | *B1 |
| R66 | *C1 | R200 | B2 | R296 | A2 | R388 | A1 |
| R67 | *B1 | R201 | C2 | R297 | *A2 | R389 | A1 |
| R68 | B2 | R202 | C2 | R298 | *B2 | R390 | A1 |
| R69 | B2 | R206 | B2 | R299 | *B2 | R391 | A1 |
| R70 | *C1 | R207 | B1 | R300 | A2 | R392 | A1 |
| R71 | *B2 | R208 | B1 | R301 | A2 | R393 | A1 |
| R72 | B2 | R209 | B1 | R302 | B2 | R394 | *A2 |
| R73 | B2 | R210 | *C2 | R303 | B2 | R395 | B2 |
| R74 | B2 | R211 | *C1 | R304 | B2 | R396 | B2 |
| R75 | B2 | R212 | C1 | R305 | B2 | R397 | A2 |
| R76 | B2 | R213 | C1 | R306 | A2 | R398 | A2 |
| R77 | B2 | R214 | A1 | R307 | A2 | R399 | A2 |
| R78 | B2 | R215 | A1 | R308 | *A2 | R400 | A2 |
| R79 | B2 | R216 | A1 | R309 | A2 | | |
| R80 | B2 | R217 | A1 | R310 | *A2 | RB1 | B2 |
| R81 | B2 | R218 | A1 | R311 | A2 | | |
| R82 | B2 | R219 | *A2 | R312 | A2 | S1 | B1 |
| R83 | B2 | R220 | *A1 | R313 | A2 | | |
| R84 | *C1 | R221 | *A1 | R314 | A2 | X1 | *C2 |
| R85 | *C1 | R222 | *A2 | R315 | A2 | X2 | *C2 |
| R86 | *C1 | R223 | *A2 | R316 | A2 | | |
| R99 | *B2 | R224 | B2 | R317 | A2 | *:B SIDE | |
| R120 | B2 | R225 | B2 | R318 | A2 | | |
| R121 | *B2 | R226 | B2 | R319 | *A2 | | |
| R122 | *C2 | R227 | A1 | R320 | A2 | | |
| R123 | *B1 | R228 | B2 | R321 | *A2 | | |
| R124 | B1 | R229 | A1 | R322 | *B2 | | |
| R125 | B1 | R230 | A1 | R323 | *B2 | | |
| R126 | B2 | R231 | A1 | R324 | *B2 | | |
| R127 | B2 | R232 | A1 | R325 | *B2 | | |
| R128 | B2 | R233 | B2 | R326 | A2 | | |
| R129 | B2 | R234 | B1 | R327 | A2 | | |
| R130 | C2 | R235 | B1 | R328 | B2 | | |
| R131 | C2 | R236 | B2 | R329 | B2 | | |
| R132 | C2 | R237 | *A1 | R330 | B2 | | |
| R133 | C2 | R238 | *A1 | R331 | B2 | | |
| R134 | C2 | R239 | B2 | R332 | A2 | | |
| R135 | C2 | R240 | *A1 | R333 | A2 | | |
| R136 | C2 | R241 | *A1 | R334 | *A2 | | |
| R137 | C2 | R242 | B2 | R335 | A2 | | |
| R138 | *C2 | R243 | *A1 | R336 | *A2 | | |
| R139 | *C2 | R244 | *A1 | R337 | A2 | | |
| R140 | C1 | R245 | B2 | R338 | A2 | | |
| R141 | C1 | R246 | *B2 | R339 | A2 | | |
| R142 | C1 | R247 | *A1 | R340 | A2 | | |
| R143 | C1 | R248 | *A1 | R341 | A2 | | |
| R144 | C1 | R249 | *A1 | R342 | A2 | | |
| R145 | C1 | R250 | *A1 | R343 | A2 | | |
| R146 | C1 | R251 | *A1 | R344 | *A1 | | |
| R147 | C1 | R252 | *A1 | R345 | *A1 | | |
| R148 | C1 | R253 | *B2 | R346 | *A1 | | |
| R149 | B1 | R254 | *B1 | R347 | *A1 | | |
| R150 | B1 | R255 | *B1 | R348 | *B2 | | |
| R151 | B1 | R256 | *A1 | R349 | *A1 | | |
| R152 | *C2 | R257 | *B1 | R350 | *A1 | | |
| R153 | *C2 | R258 | B2 | R351 | *A1 | | |
| R155 | C1 | R259 | *B2 | R352 | *A1 | | |
| R157 | B2 | R260 | B2 | R353 | *A1 | | |
| R158 | B2 | R261 | *B2 | R354 | *A1 | | |
| R159 | B2 | R262 | *B2 | R355 | *A1 | | |
| R160 | C2 | R263 | *B2 | R356 | *B1 | | |
| R161 | C2 | R264 | *B2 | R357 | *A1 | | |
| R162 | C2 | R265 | *B2 | R358 | *C1 | | |
| R163 | C2 | R266 | B2 | R359 | *C1 | | |
| R164 | C2 | R267 | B2 | R360 | *A1 | | |
| R165 | C2 | R268 | *A2 | R361 | *A1 | | |
| R166 | C2 | R269 | B2 | R362 | *A1 | | |
| R167 | C2 | R270 | B2 | R363 | *A1 | | |
| R168 | C2 | R271 | B2 | R364 | B1 | | |
| R169 | C2 | R272 | B2 | R365 | B2 | | |
| R170 | C2 | R273 | B2 | R366 | B2 | | |
| R171 | C2 | R274 | B2 | R367 | B2 | | |
| R172 | C2 | R275 | A2 | R368 | B2 | | |

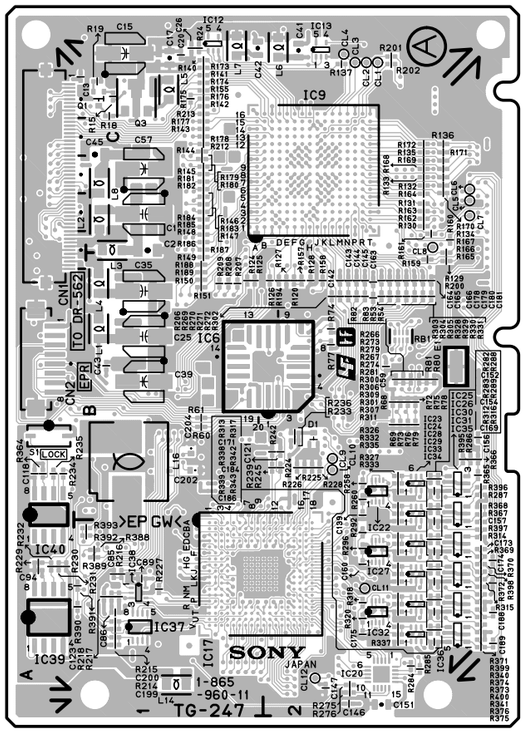TG-247 (1-865-960-21)

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| C1 | C1 | C93 | *A2 | C185 | *A2 | IC34 | A2 |
| C2 | C1 | C94 | A1 | C186 | A2 | IC35 | A2 |
| C3 | *C1 | C95 | *B1 | C187 | *A2 | IC36 | A2 |
| C4 | *C1 | C96 | *B2 | C188 | A2 | IC37 | A1 |
| C5 | *C1 | C97 | *A1 | C189 | A2 | IC38 | A1 |
| C6 | *C1 | C98 | *A1 | C190 | *B1 | IC39 | A1 |
| C7 | *C1 | C99 | *A1 | C191 | *B2 | IC40 | B1 |
| C8 | *C1 | C100 | *B1 | C192 | *B1 | IC41 | *A1 |
| C9 | *C1 | C101 | *B1 | C193 | *B1 | IC42 | *A1 |
| C10 | *B1 | C102 | *B1 | C194 | *A1 | IC43 | *B2 |
| C11 | *B1 | C103 | *B1 | C195 | *A1 | IC44 | *B1 |
| C12 | *C1 | C104 | *A1 | C196 | *A1 | IC45 | *B1 |
| C13 | C1 | C105 | *A1 | C197 | *B1 | IC46 | *B1 |
| C14 | *C1 | C106 | *A1 | C198 | *A1 | IC47 | *A2 |
| C15 | C1 | C107 | *A1 | C199 | A1 | | |
| C16 | *C1 | C108 | *A1 | C200 | A1 | L1 | B1 |
| C17 | C1 | C109 | *A2 | C201 | *A2 | L2 | C1 |
| C18 | *C1 | C110 | *A1 | C202 | B1 | L3 | C1 |
| C19 | *C1 | C111 | *A1 | C203 | *B1 | L4 | B1 |
| C20 | C1 | C112 | *A1 | C204 | B1 | L5 | C1 |
| C21 | *C1 | C113 | *A1 | C205 | *B1 | L6 | C2 |
| C22 | *C1 | C114 | *A1 | C206 | *B1 | L7 | C1 |
| C23 | *C1 | C115 | *A1 | C207 | *B1 | L8 | C1 |
| C24 | *C1 | C116 | *A1 | C208 | *B1 | L9 | *B1 |
| C25 | B1 | C117 | *A2 | C209 | *B1 | L10 | *C2 |
| C26 | C1 | C118 | B1 | C210 | *B1 | L11 | *C2 |
| C27 | *B1 | C119 | *A1 | C211 | *B1 | L12 | *C1 |
| C28 | *B1 | C120 | *A1 | C212 | *B1 | L13 | *C1 |
| C29 | *B1 | C121 | B2 | C213 | *A1 | L14 | A1 |
| C30 | *C1 | C122 | *B1 | C214 | *B1 | L15 | *B1 |
| C31 | *B1 | C123 | A1 | C215 | *B1 | L16 | B1 |
| C32 | *C2 | C124 | *B2 | C216 | *C1 | L17 | *B1 |
| C33 | *C2 | C125 | *B2 | C217 | *B2 | | |
| C34 | *B1 | C126 | *A1 | C218 | *A2 | Q1 | C1 |
| C35 | B1 | C127 | *A1 | C219 | *A2 | Q2 | *C1 |
| C36 | *B2 | C128 | *A1 | C220 | *A2 | Q3 | C1 |
| C37 | *C2 | C129 | *A1 | C221 | *A2 | Q4 | *C1 |
| C38 | *C1 | C130 | *A1 | | | Q5 | *C1 |
| C39 | B1 | C131 | *A1 | CL1 | C2 | Q6 | *C1 |
| C40 | *B1 | C132 | *A1 | CL2 | C2 | Q7 | *B1 |
| C41 | C2 | C133 | *B1 | CL3 | C2 | Q8 | *B1 |
| C42 | C1 | C134 | *A2 | CL4 | C2 | Q9 | *B1 |
| C43 | B1 | C135 | *A2 | CL5 | C2 | Q10 | *B1 |
| C44 | *B1 | C136 | *A2 | CL6 | C2 | Q11 | *C1 |
| C45 | C1 | C137 | *A1 | CL7 | C2 | Q12 | *C1 |
| C46 | *B2 | C138 | *A1 | CL8 | C2 | | |
| C47 | *B2 | C139 | B2 | CL9 | B2 | R1 | *C1 |
| C48 | *B2 | C140 | *B2 | CL10 | B2 | R2 | *C1 |
| C49 | *C1 | C141 | *B2 | CL11 | A2 | R3 | *C1 |
| C50 | *B2 | C142 | B2 | CL12 | A2 | R4 | *C1 |
| C51 | *B1 | C143 | B2 | | | R5 | *C1 |
| C52 | *B2 | C144 | B2 | CN1 | C1 | R6 | *C1 |
| C53 | *B2 | C145 | B2 | CN2 | B1 | R7 | *C1 |
| C54 | *C1 | C146 | A2 | CN3 | *C2 | R8 | *B1 |
| C55 | *B1 | C147 | A2 | | | R9 | *C1 |
| C56 | *B1 | C148 | *B2 | D1 | B2 | R10 | *C1 |
| C57 | C1 | C149 | *B2 | | | R11 | *C1 |
| C58 | *C1 | C150 | *A2 | E1 | B2 | R12 | *C1 |
| C59 | B2 | C151 | A2 | | | R13 | *C1 |
| C60 | *B2 | C152 | B2 | IC1 | *C1 | R14 | *B1 |
| C61 | *C2 | C153 | *B2 | IC2 | *C1 | R15 | C1 |
| C62 | *C2 | C154 | A2 | IC3 | *C1 | R16 | *C1 |
| C63 | *C1 | C155 | *B2 | IC4 | *B1 | R17 | *C1 |
| C64 | *C2 | C156 | B2 | IC5 | *B2 | R18 | C1 |
| C65 | *C2 | C157 | A2 | IC6 | B2 | R19 | C1 |
| C66 | *C2 | C158 | *A2 | IC7 | *B2 | R20 | *C1 |
| C67 | *C2 | C159 | *A2 | IC8 | *C2 | R21 | *C1 |
| C68 | *C2 | C160 | A2 | IC9 | C2 | R22 | *B1 |
| C69 | *C2 | C161 | *A2 | IC10 | *C1 | R23 | *C1 |
| C70 | *C2 | C162 | *A2 | IC11 | *C1 | R24 | C1 |
| C71 | *C1 | C163 | B2 | IC12 | C1 | R25 | *C1 |
| C72 | *C1 | C164 | B2 | IC13 | C2 | R26 | *C1 |
| C73 | *C1 | C165 | B2 | IC14 | *C1 | R27 | *C1 |
| C74 | *C2 | C166 | B2 | IC15 | *B1 | R28 | *C1 |
| C75 | *C1 | C167 | *A2 | IC16 | *C1 | R29 | *C1 |
| C76 | *C2 | C168 | *A2 | IC17 | A1 | R30 | *B1 |
| C77 | *C2 | C169 | A2 | IC18 | *A1 | R31 | *B1 |
| C78 | *C2 | C170 | *A2 | IC19 | *A2 | R32 | *C1 |
| C79 | *C2 | C171 | A2 | IC20 | A2 | R33 | *C1 |
| C80 | *C2 | C172 | *A2 | IC21 | *A2 | R34 | *B1 |
| C81 | *C2 | C173 | A2 | IC22 | B2 | R35 | *C1 |
| C82 | *C2 | C174 | A2 | IC23 | B2 | R36 | *B1 |
| C83 | *C2 | C175 | A2 | IC24 | B2 | R37 | *B1 |
| C84 | *C2 | C176 | *A2 | IC25 | B2 | R38 | *C1 |
| C85 | A1 | C177 | *A2 | IC26 | B2 | R39 | *C2 |
| C86 | A1 | C178 | B2 | IC27 | A2 | R40 | *C2 |
| C87 | *A1 | C179 | B2 | IC28 | A2 | R41 | *B1 |
| C88 | *A1 | C180 | B2 | IC29 | A2 | R42 | *B1 |
| C89 | A1 | C181 | B2 | IC30 | A2 | R43 | *B1 |
| C90 | *A2 | C182 | *A2 | IC31 | A2 | R44 | *B1 |
| C91 | *A2 | C183 | *A2 | IC32 | A2 | R45 | *B1 |
| C92 | *A1 | C184 | A2 | IC33 | A2 | R46 | *B1 |

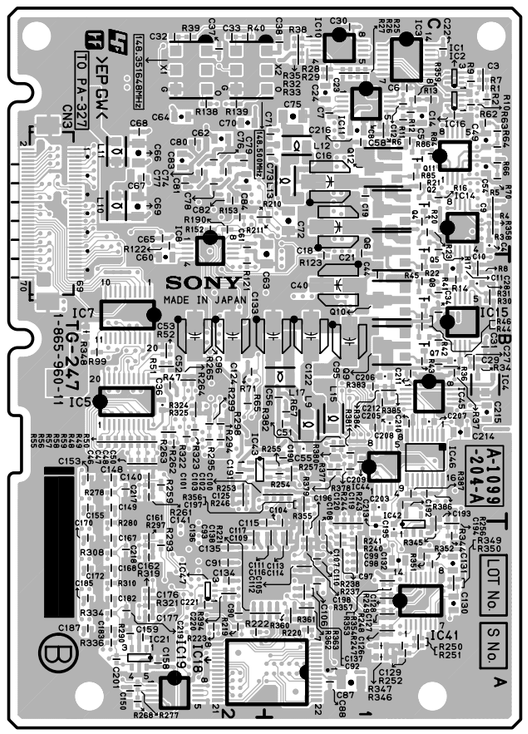


**TG-247** -A SIDE-
SUFFIX: -21




**TG-247** -B SIDE-
SUFFIX: -21

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| R47 | *B2 | R171 | C2 | R274 | B2 | R367 | B2 |
| R48 | *B2 | R172 | C2 | R275 | A2 | R368 | B2 |
| R49 | *B2 | R173 | C1 | R276 | A2 | R369 | A2 |
| R50 | *B2 | R174 | C1 | R277 | *A2 | R370 | A2 |
| R51 | *B2 | R175 | C1 | R278 | *B2 | R371 | A2 |
| R52 | *B2 | R176 | C1 | R279 | B2 | R372 | A2 |
| R53 | B2 | R177 | C1 | R280 | *A2 | R373 | A2 |
| R54 | B2 | R178 | C1 | R281 | A2 | R374 | A2 |
| R55 | *B2 | R179 | C1 | R282 | B2 | R375 | A2 |
| R56 | *B2 | R180 | C1 | R283 | B2 | R376 | A2 |
| R57 | *B2 | R181 | C1 | R284 | A2 | R377 | *B1 |
| R58 | *B2 | R182 | C1 | R285 | A2 | R378 | *B1 |
| R59 | *B2 | R183 | C1 | R286 | B2 | R379 | *B1 |
| R60 | B1 | R184 | C1 | R287 | B2 | R380 | *B1 |
| R61 | B1 | R185 | C1 | R288 | B2 | R381 | *B1 |
| R62 | *C1 | R186 | C1 | R289 | B2 | R382 | *B1 |
| R63 | *C1 | R187 | C1 | R290 | *A2 | R383 | *B1 |
| R64 | *C1 | R188 | B1 | R292 | A2 | R384 | *B1 |
| R65 | *B2 | R189 | B1 | R293 | *A2 | R385 | *B1 |
| R66 | *C1 | R190 | *C2 | R294 | *B2 | R386 | *B1 |
| R67 | *B1 | R194 | B2 | R295 | *B2 | R387 | *B1 |
| R68 | B2 | R200 | B2 | R296 | A2 | R388 | A1 |
| R69 | B2 | R201 | C2 | R297 | *A2 | R389 | A1 |
| R70 | *C1 | R202 | C2 | R298 | *B2 | R390 | A1 |
| R71 | *B2 | R206 | B2 | R299 | *B2 | R391 | A1 |
| R72 | B2 | R207 | B1 | R300 | A2 | R392 | A1 |
| R73 | B2 | R208 | B1 | R301 | A2 | R393 | A1 |
| R74 | B2 | R209 | B1 | R302 | B2 | R394 | *A2 |
| R75 | B2 | R210 | *C2 | R303 | B2 | R395 | B2 |
| R76 | B2 | R211 | *C1 | R304 | B2 | R396 | B2 |
| R77 | B2 | R212 | C1 | R305 | B2 | R397 | A2 |
| R78 | B2 | R213 | C1 | R306 | A2 | R398 | A2 |
| R79 | B2 | R214 | A1 | R307 | A2 | R399 | A2 |
| R80 | B2 | R215 | A1 | R308 | *A2 | R400 | A2 |
| R81 | B2 | R216 | A1 | R309 | A2 | | |
| R82 | B2 | R217 | A1 | R310 | *A2 | RB1 | B2 |
| R83 | B2 | R218 | A1 | R311 | A2 | | |
| R84 | *C1 | R219 | *A2 | R312 | A2 | S1 | B1 |
| R85 | *C1 | R220 | *A1 | R313 | A2 | | |
| R86 | *C1 | R221 | *A1 | R314 | A2 | X1 | *C2 |
| R87 | *C2 | R222 | *A2 | R315 | A2 | X2 | *C2 |
| R88 | *C1 | R223 | *A2 | R316 | A2 | | |
| R99 | *B2 | R224 | B2 | R317 | A2 | *:B SIDE | |
| R120 | B2 | R225 | B2 | R318 | A2 | | |
| R121 | *B2 | R226 | B2 | R319 | *A2 | | |
| R122 | *C2 | R227 | A1 | R320 | A2 | | |
| R123 | *B1 | R228 | B2 | R321 | *A2 | | |
| R124 | B1 | R229 | A1 | R322 | *B2 | | |
| R125 | B1 | R230 | A1 | R323 | *B2 | | |
| R126 | B2 | R231 | A1 | R324 | *B2 | | |
| R127 | B2 | R232 | A1 | R325 | *B2 | | |
| R128 | B2 | R233 | B2 | R326 | A2 | | |
| R129 | B2 | R234 | B1 | R327 | A2 | | |
| R130 | C2 | R235 | B1 | R328 | B2 | | |
| R131 | C2 | R236 | B2 | R329 | B2 | | |
| R132 | C2 | R237 | *A1 | R330 | B2 | | |
| R133 | C2 | R238 | *A1 | R331 | B2 | | |
| R134 | C2 | R239 | B2 | R332 | A2 | | |
| R135 | C2 | R240 | *A1 | R333 | A2 | | |
| R136 | C2 | R241 | *A1 | R334 | *A2 | | |
| R137 | C2 | R242 | B2 | R335 | A2 | | |
| R138 | *C2 | R243 | *A1 | R336 | *A2 | | |
| R139 | *C2 | R244 | *A1 | R337 | A2 | | |
| R140 | C1 | R245 | B2 | R338 | A2 | | |
| R141 | C1 | R246 | *B2 | R339 | A2 | | |
| R142 | C1 | R247 | *A1 | R340 | A2 | | |
| R143 | C1 | R248 | *A1 | R341 | A2 | | |
| R144 | C1 | R249 | *A1 | R342 | A2 | | |
| R145 | C1 | R250 | *A1 | R343 | A2 | | |
| R146 | C1 | R251 | *A1 | R344 | *A1 | | |
| R147 | C1 | R252 | *A1 | R345 | *A1 | | |
| R148 | C1 | R253 | *B2 | R346 | *A1 | | |
| R149 | B1 | R254 | *B1 | R347 | *A1 | | |
| R150 | B1 | R255 | *B1 | R348 | *B2 | | |
| R151 | B1 | R256 | *A1 | R349 | *A1 | | |
| R152 | *C2 | R257 | *B1 | R350 | *A1 | | |
| R153 | *C2 | R258 | B2 | R351 | *A1 | | |
| R155 | C1 | R259 | *B2 | R352 | *A1 | | |
| R157 | B2 | R260 | B2 | R353 | *A1 | | |
| R158 | B2 | R261 | *B2 | R354 | *A1 | | |
| R159 | B2 | R262 | *B2 | R355 | *A1 | | |
| R160 | C2 | R263 | *B2 | R356 | *B1 | | |
| R161 | C2 | R264 | *B2 | R357 | *A1 | | |
| R162 | C2 | R265 | *B2 | R358 | *C1 | | |
| R163 | C2 | R266 | B2 | R359 | *C1 | | |
| R164 | C2 | R267 | B2 | R360 | *A1 | | |
| R165 | C2 | R268 | *A2 | R361 | *A1 | | |
| R166 | C2 | R269 | B2 | R362 | *A1 | | |
| R167 | C2 | R270 | B2 | R363 | *A1 | | |
| R168 | C2 | R271 | B2 | R364 | B1 | | |
| R169 | C2 | R272 | B2 | R365 | B2 | | |
| R170 | C2 | R273 | B2 | R366 | B2 | | |

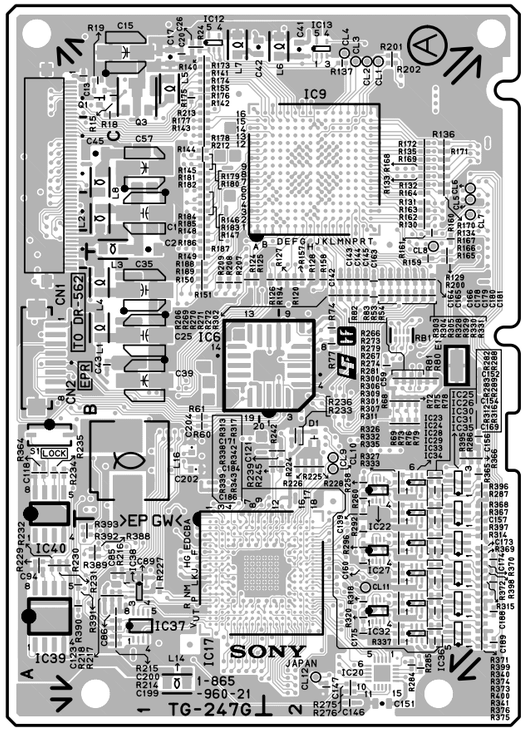TG-247 (1-865-960-22)

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| C1 | C1 | C93 | *A2 | C185 | *A2 | IC32 | A2 |
| C2 | C1 | C94 | A1 | C186 | A2 | IC33 | A2 |
| C3 | *C1 | C95 | *B1 | C187 | *A2 | IC34 | A2 |
| C4 | *C1 | C96 | *B2 | C188 | A2 | IC35 | A2 |
| C5 | *C1 | C97 | *A1 | C189 | A2 | IC36 | A2 |
| C6 | *C1 | C98 | *A1 | C190 | *B1 | IC37 | A1 |
| C7 | *C1 | C99 | *A1 | C191 | *B2 | IC38 | A1 |
| C8 | *C1 | C100 | *B1 | C192 | *B1 | IC39 | A1 |
| C9 | *C1 | C101 | *B1 | C193 | *B1 | IC40 | B1 |
| C10 | *B1 | C102 | *B1 | C194 | *A1 | IC41 | *A1 |
| C11 | *B1 | C103 | *B1 | C195 | *A1 | IC42 | *A1 |
| C12 | *C1 | C104 | *A1 | C196 | *A1 | IC43 | *B2 |
| C13 | C1 | C105 | *A1 | C197 | *B1 | IC44 | *B1 |
| C14 | *C1 | C106 | *A1 | C198 | *A1 | IC45 | *B1 |
| C15 | C1 | C107 | *A1 | C199 | A1 | IC46 | *B1 |
| C16 | *C1 | C108 | *A1 | C200 | A1 | IC47 | *A2 |
| C17 | C1 | C109 | *A2 | C201 | *A2 | | |
| C18 | *C1 | C110 | *A1 | C202 | B1 | L1 | B1 |
| C19 | *C1 | C111 | *A1 | C203 | *B1 | L2 | C1 |
| C20 | C1 | C112 | *A1 | C204 | B1 | L3 | C1 |
| C21 | *C1 | C113 | *A1 | C205 | *B1 | L4 | B1 |
| C22 | *C1 | C114 | *A1 | C206 | *B1 | L5 | C1 |
| C23 | *C1 | C115 | *A1 | C207 | *B1 | L6 | C2 |
| C24 | *C1 | C116 | *A1 | C208 | *B1 | L7 | C1 |
| C25 | B1 | C117 | *A2 | C209 | *B1 | L8 | C1 |
| C26 | C1 | C118 | B1 | C210 | *B1 | L9 | *B1 |
| C27 | *B1 | C119 | *A1 | C211 | *B1 | L10 | *C2 |
| C28 | *B1 | C120 | *A1 | C212 | *B1 | L11 | *C2 |
| C29 | *B1 | C121 | B2 | C213 | *A1 | L12 | *C1 |
| C30 | *C1 | C122 | *B1 | C214 | *B1 | L13 | *C1 |
| C31 | *B1 | C123 | A1 | C215 | *B1 | L14 | A1 |
| C32 | *C2 | C124 | *B2 | C216 | *C1 | L15 | *B1 |
| C33 | *C2 | C125 | *B2 | C217 | *B2 | L16 | B1 |
| C34 | *B1 | C126 | *A1 | C218 | *A2 | L17 | *B1 |
| C35 | B1 | C127 | *A1 | C219 | *A2 | | |
| C36 | *B2 | C128 | *A1 | C220 | *A2 | Q1 | C1 |
| C37 | *C2 | C129 | *A1 | C221 | *A2 | Q2 | *C1 |
| C38 | *C1 | C130 | *A1 | C222 | B2 | Q3 | C1 |
| C39 | B1 | C131 | *A1 | C223 | B2 | Q4 | *C1 |
| C40 | *B1 | C132 | *A1 | | | Q5 | *C1 |
| C41 | C2 | C133 | *B1 | CL1 | C2 | Q6 | *C1 |
| C42 | C1 | C134 | *A2 | CL2 | C2 | Q7 | *B1 |
| C43 | B1 | C135 | *A2 | CL3 | C2 | Q8 | *B1 |
| C44 | *B1 | C136 | *A2 | CL4 | C2 | Q9 | *B1 |
| C45 | C1 | C137 | *A1 | CL5 | C2 | Q10 | *B1 |
| C46 | *B2 | C138 | *A1 | CL6 | C2 | Q11 | *C1 |
| C47 | *B2 | C139 | B2 | CL7 | C2 | Q12 | *C1 |
| C48 | *B2 | C140 | *B2 | CL8 | C2 | | |
| C49 | *C1 | C141 | *B2 | CL9 | B2 | R1 | *C1 |
| C50 | *B2 | C142 | B2 | CL10 | B2 | R2 | *C1 |
| C51 | *B1 | C143 | B2 | CL11 | A2 | R3 | *C1 |
| C52 | *B2 | C144 | B2 | CL12 | A2 | R4 | *C1 |
| C53 | *B2 | C145 | B2 | | | R5 | *C1 |
| C54 | *C1 | C146 | A2 | CN1 | C1 | R6 | *C1 |
| C55 | *B1 | C147 | A2 | CN2 | B1 | R7 | *C1 |
| C56 | *B1 | C148 | *B2 | CN3 | *C2 | R8 | *B1 |
| C57 | C1 | C149 | *B2 | | | R9 | *C1 |
| C58 | *C1 | C150 | *A2 | D1 | B2 | R10 | *C1 |
| C59 | B2 | C151 | A2 | | | R11 | *C1 |
| C60 | *B2 | C152 | B2 | E1 | B2 | R12 | *C1 |
| C61 | *C2 | C153 | *B2 | | | R13 | *C1 |
| C62 | *C2 | C154 | A2 | IC1 | *C1 | R14 | *B1 |
| C63 | *B1 | C155 | *B2 | IC2 | *C1 | R15 | C1 |
| C64 | *C2 | C156 | B2 | IC3 | *C1 | R16 | *C1 |
| C65 | *C2 | C157 | A2 | IC4 | *B1 | R17 | *C1 |
| C66 | *C2 | C158 | *A2 | IC5 | *B2 | R18 | C1 |
| C67 | *C2 | C159 | *A2 | IC6 | B2 | R19 | C1 |
| C68 | *C2 | C160 | A2 | IC7 | *B2 | R20 | *C1 |
| C69 | *C2 | C161 | *A2 | IC8 | *C2 | R21 | *C1 |
| C70 | *C2 | C162 | *A2 | IC9 | C2 | R22 | *B1 |
| C71 | *C1 | C163 | B2 | IC10 | *C1 | R23 | *C1 |
| C72 | *C1 | C164 | B2 | IC11 | *C1 | R24 | C1 |
| C73 | *C1 | C165 | B2 | IC12 | C1 | R25 | *C1 |
| C74 | *C2 | C166 | B2 | IC13 | C2 | R26 | *C1 |
| C75 | *C1 | C167 | *A2 | IC14 | *C1 | R27 | *C1 |
| C76 | *C2 | C168 | *A2 | IC15 | *B1 | R28 | *C1 |
| C77 | *C2 | C169 | A2 | IC16 | *C1 | R29 | *C1 |
| C78 | *C2 | C170 | *A2 | IC17 | A1 | R30 | *B1 |
| C79 | *C2 | C171 | A2 | IC18 | *A1 | R31 | *B1 |
| C80 | *C2 | C172 | *A2 | IC19 | *A2 | R32 | *C1 |
| C81 | *C2 | C173 | A2 | IC20 | A2 | R33 | *C1 |
| C82 | *C2 | C174 | A2 | IC21 | *A2 | R34 | *B1 |
| C83 | *C2 | C175 | A2 | IC22 | B2 | R35 | *C1 |
| C84 | *C2 | C176 | *A2 | IC23 | B2 | R36 | *B1 |
| C85 | A1 | C177 | *A2 | IC24 | B2 | R37 | *B1 |
| C86 | A1 | C178 | B2 | IC25 | B2 | R38 | *C1 |
| C87 | *A1 | C179 | B2 | IC26 | B2 | R39 | *C2 |
| C88 | *A1 | C180 | B2 | IC27 | A2 | R40 | *C2 |
| C89 | A1 | C181 | B2 | IC28 | A2 | R41 | *B1 |
| C90 | *A2 | C182 | *A2 | IC29 | A2 | R42 | *B1 |
| C91 | *A2 | C183 | *A2 | IC30 | A2 | R43 | *B1 |
| C92 | *A1 | C184 | A2 | IC31 | A2 | R44 | *B1 |

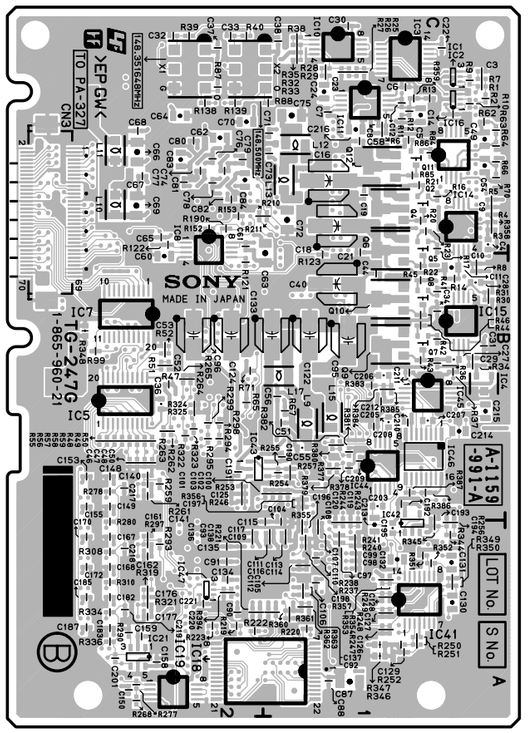


**TG-247** -A SIDE-
SUFFIX: -22




**TG-247** -B SIDE-
SUFFIX: -22

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| R45 | *B1 | R168 | C2 | R271 | B2 | R364 | B1 |
| R46 | *B1 | R169 | C2 | R272 | B2 | R365 | B2 |
| R47 | *B2 | R170 | C2 | R273 | B2 | R366 | B2 |
| R48 | *B2 | R171 | C2 | R274 | B2 | R367 | B2 |
| R49 | *B2 | R172 | C2 | R275 | A2 | R368 | B2 |
| R50 | *B2 | R173 | C1 | R276 | A2 | R369 | A2 |
| R51 | *B2 | R174 | C1 | R277 | *A2 | R370 | A2 |
| R52 | *B2 | R175 | C1 | R278 | *B2 | R371 | A2 |
| R53 | B2 | R176 | C1 | R279 | B2 | R372 | A2 |
| R54 | B2 | R177 | C1 | R280 | *A2 | R373 | A2 |
| R55 | *B2 | R178 | C1 | R281 | A2 | R374 | A2 |
| R56 | *B2 | R179 | C1 | R282 | B2 | R375 | A2 |
| R57 | *B2 | R180 | C1 | R283 | B2 | R376 | A2 |
| R58 | *B2 | R181 | C1 | R284 | A2 | R377 | *B1 |
| R59 | *B2 | R182 | C1 | R285 | A2 | R378 | *B1 |
| R60 | B1 | R183 | C1 | R286 | B2 | R379 | *B1 |
| R61 | B1 | R184 | C1 | R287 | B2 | R380 | *B1 |
| R62 | *C1 | R185 | C1 | R288 | B2 | R381 | *B1 |
| R63 | *C1 | R186 | C1 | R289 | B2 | R382 | *B1 |
| R64 | *C1 | R187 | C1 | R290 | *A2 | R383 | *B1 |
| R65 | *B2 | R188 | B1 | R292 | A2 | R384 | *B1 |
| R66 | *C1 | R189 | B1 | R293 | *A2 | R385 | *B1 |
| R67 | *B1 | R190 | *C2 | R294 | *B2 | R386 | *B1 |
| R68 | B2 | R194 | B2 | R295 | *B2 | R387 | *B1 |
| R69 | B2 | R200 | B2 | R296 | A2 | R388 | A1 |
| R70 | *C1 | R201 | C2 | R297 | *A2 | R389 | A1 |
| R71 | *B2 | R202 | C2 | R298 | *B2 | R390 | A1 |
| R72 | B2 | R206 | B2 | R299 | *B2 | R391 | A1 |
| R73 | B2 | R207 | B1 | R300 | A2 | R392 | A1 |
| R74 | B2 | R208 | B1 | R301 | A2 | R393 | A1 |
| R75 | B2 | R209 | B1 | R302 | B2 | R394 | *A2 |
| R76 | B2 | R210 | *C2 | R303 | B2 | R395 | B2 |
| R77 | B2 | R211 | *C1 | R304 | B2 | R396 | B2 |
| R78 | B2 | R212 | C1 | R305 | B2 | R397 | A2 |
| R79 | B2 | R213 | C1 | R306 | A2 | R398 | A2 |
| R80 | B2 | R214 | A1 | R307 | A2 | R399 | A2 |
| R81 | B2 | R215 | A1 | R308 | *A2 | R400 | A2 |
| R82 | B2 | R216 | A1 | R309 | A2 | | |
| R83 | B2 | R217 | A1 | R310 | *A2 | RB1 | B2 |
| R84 | *C1 | R218 | A1 | R311 | A2 | | |
| R85 | *C1 | R219 | *A2 | R312 | A2 | S1 | B1 |
| R86 | *C1 | R220 | *A1 | R313 | A2 | | |
| R87 | *C2 | R221 | *A1 | R314 | A2 | X1 | *C2 |
| R88 | *C1 | R222 | *A2 | R315 | A2 | X2 | *C2 |
| R89 | *C2 | R223 | *A2 | R316 | A2 | | |
| R99 | *B2 | R224 | B2 | R317 | A2 | *:B SIDE | |
| R120 | B2 | R225 | B2 | R318 | A2 | | |
| R121 | *B2 | R226 | B2 | R319 | *A2 | | |
| R122 | *C2 | R227 | A1 | R320 | A2 | | |
| R123 | *B1 | R228 | B2 | R321 | *A2 | | |
| R124 | B1 | R229 | A1 | R322 | *B2 | | |
| R125 | B1 | R230 | A1 | R323 | *B2 | | |
| R126 | B2 | R231 | A1 | R324 | *B2 | | |
| R127 | B2 | R232 | A1 | R325 | *B2 | | |
| R128 | B2 | R233 | B2 | R326 | A2 | | |
| R129 | B2 | R234 | B1 | R327 | A2 | | |
| R130 | C2 | R235 | B1 | R328 | B2 | | |
| R131 | C2 | R236 | B2 | R329 | B2 | | |
| R132 | C2 | R237 | *A1 | R330 | B2 | | |
| R133 | C2 | R238 | *A1 | R331 | B2 | | |
| R134 | C2 | R239 | B2 | R332 | A2 | | |
| R135 | C2 | R240 | *A1 | R333 | A2 | | |
| R136 | C2 | R241 | *A1 | R334 | *A2 | | |
| R137 | C2 | R242 | B2 | R335 | A2 | | |
| R138 | *C2 | R243 | *A1 | R336 | *A2 | | |
| R139 | *C2 | R244 | *A1 | R337 | A2 | | |
| R140 | C1 | R245 | B2 | R338 | A2 | | |
| R141 | C1 | R246 | *B2 | R339 | A2 | | |
| R142 | C1 | R247 | *A1 | R340 | A2 | | |
| R143 | C1 | R248 | *A1 | R341 | A2 | | |
| R144 | C1 | R249 | *A1 | R342 | A2 | | |
| R145 | C1 | R250 | *A1 | R343 | A2 | | |
| R146 | C1 | R251 | *A1 | R344 | *A1 | | |
| R147 | C1 | R252 | *A1 | R345 | *A1 | | |
| R148 | C1 | R253 | *B2 | R346 | *A1 | | |
| R149 | B1 | R254 | *B1 | R347 | *A1 | | |
| R150 | B1 | R255 | *B1 | R348 | *B2 | | |
| R151 | B1 | R256 | *A1 | R349 | *A1 | | |
| R152 | *C2 | R257 | *B1 | R350 | *A1 | | |
| R153 | *C2 | R258 | B2 | R351 | *A1 | | |
| R155 | C1 | R259 | *B2 | R352 | *A1 | | |
| R157 | B2 | R260 | B2 | R353 | *A1 | | |
| R158 | B2 | R261 | *B2 | R354 | *A1 | | |
| R159 | B2 | R262 | *B2 | R355 | *A1 | | |
| R160 | C2 | R263 | *B2 | R356 | *B1 | | |
| R161 | C2 | R264 | *B2 | R357 | *A1 | | |
| R162 | C2 | R265 | *B2 | R358 | *C1 | | |
| R163 | C2 | R266 | B2 | R359 | *C1 | | |
| R164 | C2 | R267 | B2 | R360 | *A1 | | |
| R165 | C2 | R268 | *A2 | R361 | *A1 | | |
| R166 | C2 | R269 | B2 | R362 | *A1 | | |
| R167 | C2 | R270 | B2 | R363 | *A1 | | |

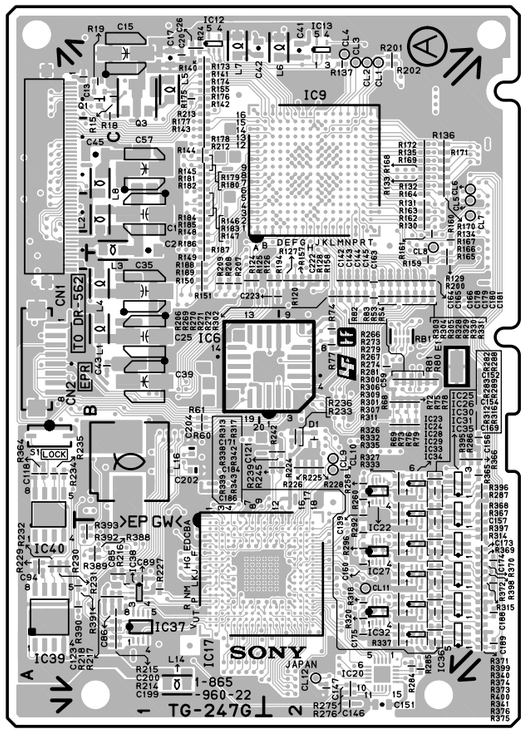TR-136 (1-868-410-13)

| | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| C1 | *C3 | C163 | *C2 | C283 | C1 | C507 | *A2 | C707 | B2 | CL31 | *A3 | IC201 | *C3 |
| C2 | A3 | C164 | *C2 | C284 | C1 | C508 | *B2 | C708 | B2 | CL41 | D3 | IC202 | D2 |
| C3 | A3 | C165 | *C2 | C285 | D1 | C509 | *A2 | C709 | B2 | CL42 | D3 | IC203 | *D2 |
| C4 | *A3 | C166 | *C2 | C286 | C1 | C510 | *A2 | C710 | B2 | CL101 | D3 | IC204 | D2 |
| C5 | *A3 | C167 | *C3 | C287 | D1 | C511 | *A2 | C721 | *B2 | CL102 | C1 | IC205 | *D2 |
| C6 | *A3 | C171 | *C2 | C288 | D1 | C512 | *A2 | C722 | *B2 | CL103 | C2 | IC206 | D2 |
| C7 | *A3 | C172 | C2 | C289 | C1 | C513 | *A2 | C723 | *B2 | CL104 | C3 | IC207 | *D2 |
| C8 | *A3 | C173 | *C2 | C290 | *C1 | C514 | *A2 | C724 | *B2 | CL105 | C2 | IC208 | D1 |
| C9 | A3 | C174 | *C2 | C291 | *D1 | C515 | *B2 | C725 | *B2 | CL201 | D2 | IC209 | *D1 |
| C10 | A3 | C175 | *C2 | C292 | *D1 | C516 | *B2 | C726 | *B2 | CL401 | B3 | IC210 | D1 |
| C11 | B3 | C176 | *C2 | C293 | *D1 | C517 | *A2 | C727 | *B2 | CL501 | A2 | IC211 | *D1 |
| C12 | *A3 | C177 | *C2 | C294 | *D1 | C518 | *B2 | C728 | *B3 | CL502 | A2 | IC401 | B3 |
| C13 | A3 | C178 | *C2 | C295 | *D1 | C519 | *A2 | C729 | *B2 | CL503 | A2 | IC402 | C3 |
| C14 | A3 | C179 | *C2 | C296 | *D1 | C520 | *A2 | C730 | *B2 | CL701 | B2 | IC404 | C2 |
| C21 | *A3 | C180 | *C2 | C297 | *D1 | C521 | *A2 | C731 | *B2 | CL702 | B2 | IC405 | C2 |
| C22 | *A3 | C181 | *C2 | C298 | *D1 | C522 | *A2 | C732 | *B2 | CL703 | B2 | IC406 | *C3 |
| C31 | A3 | C182 | *C2 | C299 | *D1 | C523 | *A2 | C733 | *B3 | CL704 | B2 | IC407 | *C2 |
| C32 | *A3 | C186 | *C2 | C300 | *D1 | C524 | *A2 | C734 | *B3 | CL851 | A2 | IC408 | *C2 |
| C33 | A3 | C187 | *C2 | C301 | *D1 | C525 | *A2 | C735 | B3 | | | IC410 | C2 |
| C34 | A3 | C188 | *C2 | C306 | D1 | C526 | *A1 | C736 | B3 | CN1 | *C3 | IC501 | A2 |
| C41 | D3 | C189 | *C2 | C307 | C1 | C527 | *A1 | C737 | B3 | CN2 | C3 | IC504 | A1 |
| C42 | D3 | C190 | *C2 | C308 | C1 | C528 | *A2 | C738 | B2 | CN3 | A1 | IC531 | *A3 |
| C43 | *D3 | C191 | *C3 | C309 | C1 | C529 | *A2 | C739 | B3 | CN101 | C2 | IC532 | A3 |
| C44 | *D3 | C192 | *C3 | C310 | D1 | C531 | *B2 | C761 | *B1 | CN601 | B1 | IC533 | A3 |
| C45 | *D3 | C193 | *C3 | C311 | C1 | C532 | A2 | C762 | *B1 | CN602 | B1 | IC541 | *A2 |
| C46 | D3 | C194 | C2 | C312 | D1 | C533 | A3 | C763 | *B1 | | | IC542 | *A1 |
| C47 | *D3 | C201 | D2 | C313 | D1 | C541 | *A2 | C764 | *B1 | D1 | *A3 | IC543 | A2 |
| C48 | *D3 | C202 | C2 | C314 | C1 | C542 | *A2 | C765 | *B1 | D2 | *A3 | IC545 | *A2 |
| C49 | D3 | C203 | D3 | C315 | *C1 | C543 | A1 | C766 | *A1 | D41 | *D3 | IC546 | A2 |
| C50 | D3 | C204 | D3 | C316 | *D1 | C544 | *A1 | C767 | *A1 | D42 | *D3 | IC601 | *C3 |
| C51 | D3 | C205 | *C2 | C317 | *D1 | C546 | *A2 | C768 | B1 | D43 | *D3 | IC602 | *B3 |
| C52 | D3 | C208 | *C2 | C318 | *D1 | C547 | *A2 | C769 | *A1 | D101 | *D2 | IC603 | B3 |
| C53 | D3 | C209 | *C2 | C319 | *D1 | C548 | *A2 | C770 | *B2 | D102 | *D3 | IC604 | *B3 |
| C92 | *C3 | C210 | D2 | C320 | *D1 | C549 | *A2 | C771 | *B2 | D103 | *D3 | IC605 | *A1 |
| C93 | *C3 | C211 | C2 | C321 | *D1 | C550 | *A2 | C772 | *B2 | D104 | *C1 | IC606 | *B1 |
| C94 | *D3 | C212 | D2 | C322 | *D1 | C552 | *A1 | C801 | *B1 | D105 | *C1 | IC607 | *B1 |
| C95 | A2 | C213 | D2 | C323 | *D1 | C553 | *A1 | C802 | *B1 | D106 | *C1 | IC608 | *B1 |
| C101 | D3 | C214 | C2 | C324 | *D1 | C554 | *A2 | C803 | *B1 | D107 | *C1 | IC701 | B2 |
| C102 | D3 | C215 | *C2 | C325 | *D1 | C555 | *A2 | C804 | *B1 | D108 | *C3 | IC702 | B3 |
| C103 | D3 | C216 | *D2 | C326 | *D1 | C556 | A2 | C805 | *B1 | D109 | *C3 | IC703 | B2 |
| C104 | D2 | C217 | *D2 | C401 | C3 | C557 | A2 | C806 | *B1 | D110 | *C2 | IC721 | *B2 |
| C105 | D3 | C218 | *D2 | C402 | C3 | C558 | A2 | C807 | *B1 | D111 | *C2 | IC722 | *B2 |
| C106 | D3 | C219 | *D2 | C403 | C3 | C559 | *A3 | C808 | *B1 | D112 | *C2 | IC725 | *B3 |
| C107 | *D3 | C220 | *D2 | C404 | C3 | C560 | *A2 | C809 | *B1 | D113 | *C2 | IC727 | B3 |
| C108 | *D3 | C221 | *D2 | C405 | B3 | C561 | *A2 | C810 | *B1 | D201 | *D2 | IC728 | B3 |
| C109 | *D3 | C222 | *D2 | C407 | C3 | C562 | *A2 | C811 | *B1 | D202 | *C1 | IC729 | B3 |
| C110 | *D3 | C223 | *D2 | C408 | C3 | C563 | A2 | C812 | *B1 | D205 | *C2 | IC761 | *B1 |
| C111 | *D3 | C224 | *D2 | C409 | C3 | C564 | A2 | C813 | *B1 | D208 | *C1 | IC763 | *A1 |
| C112 | *D3 | C225 | *D2 | C410 | B3 | C565 | *A2 | C814 | *B1 | D211 | *C1 | IC801 | *B1 |
| C113 | *D3 | C226 | D2 | C411 | B3 | C566 | A2 | C815 | B2 | D214 | *D2 | IC802 | *B1 |
| C114 | *D3 | C231 | D1 | C412 | B2 | C601 | *C3 | C816 | B2 | D401 | C2 | IC803 | *B1 |
| C115 | *D3 | C232 | C2 | C413 | B3 | C602 | *B2 | C817 | B2 | D402 | C2 | IC805 | *B1 |
| C116 | *D3 | C233 | C2 | C414 | C3 | C603 | A2 | C818 | B2 | D403 | C3 | IC806 | B2 |
| C117 | D3 | C234 | D2 | C415 | C2 | C604 | *B2 | C819 | B2 | D404 | C3 | IC807 | *B2 |
| C118 | D3 | C235 | C2 | C416 | C3 | C605 | *A1 | C820 | B2 | D405 | *B1 | IC851 | *A3 |
| C119 | D3 | C236 | D2 | C417 | C2 | C606 | *B1 | C821 | B2 | D406 | *C1 | IC852 | *A3 |
| C120 | *D3 | C237 | D1 | C418 | C2 | C607 | *A1 | C822 | B2 | D541 | A2 | IC853 | A3 |
| C121 | *D3 | C238 | *C1 | C419 | C2 | C608 | *B1 | C823 | B2 | D542 | A2 | IC854 | A3 |
| C122 | *D3 | C239 | *D1 | C420 | C2 | C609 | *A1 | C824 | B2 | D721 | *B2 | | |
| C126 | *C1 | C240 | *D2 | C422 | C2 | C610 | *B1 | C825 | B2 | D722 | *B2 | JC1 | *C3 |
| C127 | C1 | C241 | *D2 | C423 | C2 | C611 | *A1 | C826 | B2 | D761 | *B1 | JC2 | *C3 |
| C128 | *C1 | C242 | *D1 | C425 | C1 | C612 | *B1 | C827 | *B2 | | | JC101 | C3 |
| C129 | *C1 | C243 | *D1 | C431 | *C3 | C613 | *A1 | C828 | *B2 | E1 | B3 | JC102 | C3 |
| C130 | *C1 | C244 | *D1 | C432 | *C3 | C614 | A1 | C829 | *B2 | E2 | C1 | JC103 | C1 |
| C131 | *C1 | C245 | *D1 | C433 | *C3 | C615 | *A1 | C830 | *B2 | E4 | D3 | JC104 | C1 |
| C132 | *C1 | C246 | *D2 | C434 | *B3 | C616 | A1 | C831 | *B2 | E11 | *A1 | | |
| C133 | *C1 | C247 | *D2 | C435 | *B3 | C617 | *A1 | C832 | *B2 | E12 | *B1 | L1 | A3 |
| C134 | *C1 | C248 | D1 | C436 | *C3 | C618 | A1 | C833 | *B2 | E13 | *C1 | L2 | A3 |
| C135 | *C1 | C249 | *D2 | C437 | *C2 | C619 | *B1 | C834 | *B2 | E200 | C2 | L11 | B3 |
| C136 | *C1 | C256 | D2 | C438 | *B3 | C620 | B1 | C851 | *A3 | | | L21 | *A3 |
| C137 | *C1 | C257 | C2 | C439 | *C2 | C621 | A1 | C852 | *A3 | FL201 | C3 | L31 | A3 |
| C138 | *C1 | C258 | C2 | C440 | *C2 | C622 | A1 | C853 | A3 | FL202 | D3 | L41 | D3 |
| C141 | *C1 | C259 | C2 | C441 | *B3 | C623 | *B1 | C854 | A3 | FL601 | A1 | L101 | D2 |
| C142 | C1 | C260 | D2 | C442 | *B2 | C624 | *B1 | | | FL602 | B1 | L102 | *C1 |
| C143 | *C1 | C261 | C2 | C443 | *B2 | C625 | B1 | CF101 | D3 | | | L103 | *C1 |
| C144 | *C1 | C262 | D2 | C444 | *C2 | C626 | B1 | CF102 | C1 | IC1 | *A3 | L104 | *C3 |
| C145 | *C1 | C263 | D2 | C445 | *C2 | C627 | B1 | CF103 | C1 | IC11 | *B3 | L105 | *C2 |
| C146 | *C1 | C264 | C2 | C451 | *B1 | C628 | B1 | CF104 | C3 | IC21 | *A3 | L106 | *C2 |
| C147 | *C1 | C265 | *C2 | C452 | *B1 | C629 | B1 | CF105 | C2 | IC31 | *A3 | L201 | *C2 |
| C148 | *C1 | C266 | *D2 | C453 | *C2 | C630 | B1 | CF201 | C2 | IC41 | *D3 | L202 | D2 |
| C149 | *C1 | C267 | *D2 | C454 | *B2 | C631 | *C1 | CF202 | C2 | IC42 | *D3 | L203 | C2 |
| C150 | *C1 | C268 | *D2 | C455 | *C2 | C632 | *B1 | CF203 | C2 | IC61 | *D2 | L204 | D1 |
| C151 | *C1 | C269 | *D2 | C456 | *B2 | C633 | *B1 | CF204 | C2 | IC63 | *D2 | L205 | D2 |
| C152 | *C1 | C270 | *D2 | C457 | *B2 | C634 | *B1 | CF205 | C1 | IC92 | *C3 | L206 | D2 |
| C153 | *C1 | C271 | *D2 | C458 | *C2 | C635 | *B1 | CF206 | C1 | IC93 | *C3 | L207 | C2 |
| C156 | *C3 | C272 | *D2 | C459 | *C1 | C636 | *B1 | CF207 | C1 | IC94 | A2 | L208 | D2 |
| C157 | C3 | C273 | *D2 | C501 | *A2 | C701 | B2 | CF208 | C1 | IC101 | D2 | L209 | D1 |
| C158 | *C3 | C274 | *D2 | C502 | *A2 | C702 | B3 | | | IC102 | *D3 | L210 | C1 |
| C159 | *C3 | C275 | *D2 | C503 | *B2 | C703 | B2 | CL1 | *A3 | IC103 | *D3 | L211 | D1 |
| C160 | *C2 | C276 | *D2 | C504 | *B2 | C704 | B2 | CL2 | *A3 | IC104 | *D3 | L212 | D1 |
| C161 | *C2 | C281 | D1 | C505 | *B2 | C705 | B2 | CL11 | *A3 | IC105 | *C2 | L213 | C1 |
| C162 | *C2 | C282 | C1 | C506 | *B2 | C706 | B2 | CL21 | *A3 | IC106 | *D2 | L214 | D1 |
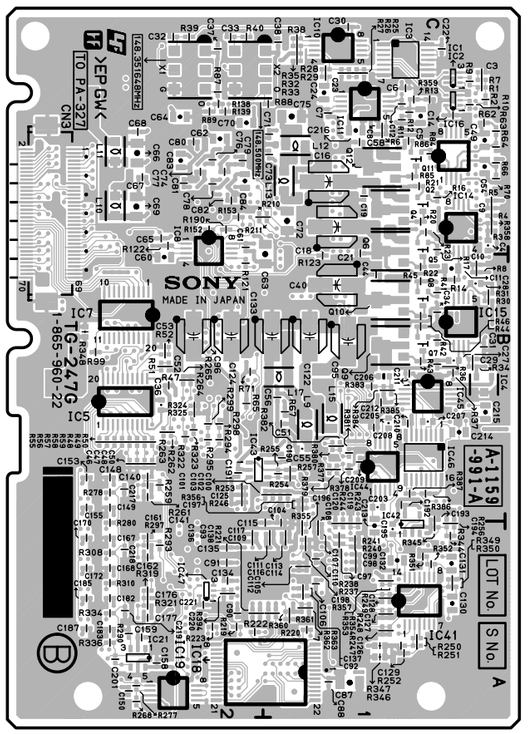
| | | | |
|---|---|---|---|
| LP101 | C3 | Q1 | *A3 |
| LP601 | B1 | Q2 | *A3 |
| LP602 | C1 | Q41 | *D3 |
| | | Q42 | *D3 |
| LV101 | D3 | Q101 | D3 |
| LV102 | C1 | Q102 | *D3 |
| LV103 | C1 | Q103 | D3 |
| LV104 | C2 | Q104 | D3 |
| LV105 | C2 | Q105 | *D3 |
| LV202 | D2 | Q106 | *C1 |
| LV203 | D1 | Q107 | *C1 |
| LV204 | D1 | Q108 | *C1 |
| LV205 | D2 | Q109 | *C1 |
| LV206 | D2 | Q110 | *C1 |
| LV207 | D1 | Q111 | *C1 |
| LV208 | D1 | Q112 | *C3 |
| LV209 | D1 | Q113 | *C2 |
| LV210 | D1 | Q114 | *C2 |
| | | Q115 | *C2 |
| | | Q116 | *C2 |
| | | Q117 | *C2 |
| | | Q201 | *D2 |
| | | Q202 | *D2 |
| | | Q401 | B2 |
| | | Q541 | *A2 |
| | | Q542 | *A2 |
| | | Q543 | *A2 |
| | | Q721 | *B3 |
| | | Q722 | *B3 |
| | | Q761 | *B1 |
| | | Q801 | *B2 |
| | | Q802 | *B2 |




**TR-136** -A SIDE-
SUFFIX: -13




**TR-136** -B SIDE-
SUFFIX: -13

| | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| R1 | *A3 | R137 | *D2 | R262 | *C2 | R371 | D1 | R523 | B2 | R631 | A2 | R768 | *A1 | RB624 | *A2 |
| R2 | *A3 | R138 | *D3 | R265 | D2 | R372 | C1 | R524 | B2 | R632 | A1 | R769 | *B1 | RB625 | *A2 |
| R3 | *A3 | R139 | *D3 | R266 | D2 | R373 | D1 | R525 | B2 | R633 | A1 | R770 | *A1 | RB626 | *A2 |
| R4 | *A3 | R141 | *C1 | R267 | C2 | R374 | C1 | R531 | B2 | R634 | B1 | R771 | *A1 | RB701 | B2 |
| R5 | *A3 | R142 | *C1 | R268 | D2 | R375 | D1 | R532 | B2 | R635 | B1 | R772 | *B1 | RB702 | B2 |
| R6 | *A3 | R143 | *C1 | R269 | *C2 | R376 | D1 | R533 | *A2 | R636 | A1 | R773 | *B1 | RB703 | B3 |
| R7 | *A3 | R144 | *C1 | R270 | D2 | R377 | *D1 | R534 | B2 | R637 | *B1 | R774 | *B1 | RB704 | B2 |
| R8 | *A3 | R145 | *C1 | R271 | D2 | R378 | *D1 | R535 | A3 | R638 | *B1 | R775 | *B1 | RB851 | *A3 |
| R9 | *A3 | R146 | *C1 | R272 | *D2 | R379 | *D1 | R536 | A3 | R639 | *B1 | R776 | *A1 | RB852 | *A3 |
| R11 | *A3 | R147 | *C1 | R273 | *D2 | R380 | *D1 | R537 | A3 | R640 | *B1 | R777 | *A1 | RB853 | *A2 |
| R12 | *A3 | R148 | *C1 | R274 | *D2 | R381 | *D1 | R538 | A3 | R641 | *B1 | R778 | *A1 | RB854 | *A2 |
| R13 | *A3 | R149 | *C1 | R275 | *D2 | R382 | *D1 | R541 | A2 | R642 | *B1 | R779 | *B1 | RB855 | A3 |
| R14 | *B3 | R150 | *C1 | R276 | *D2 | R383 | *D1 | R542 | A2 | R643 | *B1 | R780 | *B2 | RB856 | A3 |
| R15 | *B3 | R151 | *C1 | R277 | *D2 | R384 | D1 | R543 | A2 | R644 | *B1 | R781 | *B2 | RB857 | *A3 |
| R21 | *A3 | R152 | *C1 | R278 | *D2 | R385 | *D1 | R544 | B2 | R645 | *B1 | R782 | *B2 | RB858 | *A3 |
| R31 | *A3 | R153 | *C1 | R279 | *D2 | R386 | *D1 | R545 | B2 | R646 | *B1 | R801 | *B1 | RB859 | *A3 |
| R32 | *A3 | R154 | *C1 | R280 | *D2 | R401 | C3 | R546 | A2 | R647 | *C1 | R802 | *B1 | RB860 | *A3 |
| R33 | *A3 | R155 | *C1 | R281 | *D2 | R402 | C3 | R547 | B2 | R648 | *C1 | R803 | *B1 | RB861 | A3 |
| R34 | *A3 | R156 | *C1 | R282 | *D2 | R403 | B3 | R548 | B2 | R649 | *B1 | R804 | *B1 | RB862 | A3 |
| R43 | *D3 | R157 | *C1 | R283 | *D2 | R404 | B3 | R549 | B2 | R650 | *B1 | R805 | *B1 | RB863 | *B3 |
| R45 | *D3 | R158 | *C1 | R284 | *D2 | R405 | B3 | R550 | B2 | R651 | *B1 | R806 | *B1 | RB864 | *B3 |
| R46 | *D3 | R159 | *C1 | R285 | *D2 | R406 | B3 | R551 | B2 | R652 | *B1 | R807 | *B1 | RB865 | *B3 |
| R47 | *D3 | R166 | *C2 | R291 | C2 | R408 | C3 | R552 | B2 | R653 | *B1 | R808 | *B1 | RB866 | B3 |
| R48 | *D3 | R167 | *C1 | R292 | C2 | R409 | C3 | R553 | *A2 | R654 | *B1 | R809 | *B1 | RB867 | B3 |
| R49 | *D3 | R168 | *C1 | R293 | D2 | R410 | B3 | R554 | *A2 | R655 | *B1 | R810 | *B1 | RB868 | B3 |
| R50 | *D3 | R169 | *C1 | R294 | D2 | R411 | B3 | R555 | *A2 | R656 | *B1 | R811 | *B1 | | |
| R51 | *D3 | R170 | *C1 | R295 | D2 | R412 | B2 | R556 | *A2 | R657 | *B1 | R812 | *B1 | RV102 | C1 |
| R53 | *D3 | R171 | *C1 | R296 | C2 | R413 | B3 | R557 | *A2 | R658 | *B1 | R813 | *B1 | RV103 | C1 |
| R54 | *D3 | R172 | *C1 | R297 | D1 | R414 | C3 | R558 | *A2 | R659 | *A1 | R814 | *B1 | RV104 | C3 |
| R55 | *D3 | R173 | *C1 | R298 | D1 | R415 | C3 | R559 | *A2 | R660 | A1 | R815 | *B1 | RV105 | C2 |
| R56 | *D3 | R174 | *C1 | R299 | C2 | R416 | C2 | R560 | *A1 | R661 | A1 | R816 | *B1 | RV201 | D1 |
| R61 | *D2 | R175 | *C1 | R300 | D2 | R417 | C2 | R561 | *A2 | R662 | *C3 | R817 | *B1 | RV202 | D2 |
| R62 | *D2 | R176 | *C1 | R301 | D2 | R418 | C3 | R562 | *A2 | R663 | B1 | R818 | *B1 | RV203 | D1 |
| R63 | *D2 | R177 | *C1 | R302 | *D1 | R419 | B2 | R563 | *A1 | R664 | B2 | R819 | *B1 | RV204 | D1 |
| R64 | *D2 | R178 | *C1 | R303 | *D1 | R420 | B2 | R564 | *A2 | R701 | C3 | R820 | B2 | RV601 | A1 |
| R65 | *D3 | R179 | *C1 | R304 | *D2 | R421 | B2 | R565 | *A2 | R702 | C3 | R821 | B2 | RV602 | A1 |
| R66 | *D3 | R180 | *C1 | R305 | *D2 | R422 | B2 | R566 | *A2 | R703 | B2 | R822 | *B1 | RV721 | B3 |
| R67 | *D3 | R181 | *C1 | R306 | *D1 | R423 | B2 | R567 | A2 | R704 | B2 | R823 | *B1 | RV761 | B1 |
| R68 | *D3 | R182 | *C1 | R307 | *D1 | R424 | B2 | R568 | A2 | R705 | B2 | R824 | *B1 | RV801 | B2 |
| R69 | *D3 | R183 | *C1 | R308 | *D1 | R425 | B2 | R569 | A2 | R706 | B2 | R825 | B2 | | |
| R70 | *D3 | R184 | *C2 | R309 | *D1 | R426 | B2 | R570 | A2 | R707 | B2 | R826 | B2 | S1 | A1 |
| R71 | *C2 | R191 | *C3 | R310 | *D1 | R429 | C2 | R571 | A2 | R708 | B2 | R827 | B2 | | |
| R72 | *C2 | R192 | *C3 | R311 | D2 | R430 | C2 | R572 | A2 | R709 | B2 | R828 | B2 | THP1 | *A3 |
| R73 | *D2 | R193 | *C3 | R312 | *D2 | R432 | C2 | R573 | A2 | R710 | B2 | R829 | B2 | THP2 | *A3 |
| R74 | *D3 | R194 | *C3 | R313 | *D2 | R434 | C2 | R574 | A2 | R711 | B2 | R830 | B2 | THP11 | *B3 |
| R78 | *D3 | R195 | *C3 | R316 | C2 | R435 | C2 | R575 | A2 | R712 | B2 | R831 | B2 | THP31 | *A3 |
| R89 | *C3 | R196 | *C3 | R317 | C2 | R436 | C2 | R576 | A2 | R713 | B2 | R832 | B2 | THP41 | *D3 |
| R90 | *C3 | R197 | *C3 | R318 | D2 | R437 | B2 | R577 | A2 | R714 | B2 | R833 | *B2 | | |
| R91 | *C3 | R198 | *C3 | R319 | D2 | R441 | *C3 | R578 | A2 | R715 | B2 | R834 | *B2 | TP101 | *C3 |
| R92 | *C3 | R199 | *C3 | R320 | D2 | R442 | *C3 | R579 | *A2 | R716 | B2 | R835 | *B2 | TP102 | *C1 |
| R94 | *C3 | R200 | *C3 | R321 | D2 | R443 | *C3 | R580 | *A2 | R721 | *B2 | R836 | *B2 | TP103 | *C1 |
| R95 | *C3 | R201 | *C3 | R322 | C2 | R444 | *C3 | R581 | *A2 | R722 | *B2 | R837 | *B2 | TP104 | *C3 |
| R96 | *C3 | R202 | *C2 | R323 | D2 | R445 | *C3 | R582 | *A3 | R723 | *B2 | R838 | *B2 | TP105 | *C2 |
| R97 | *C3 | R203 | *C2 | R324 | C2 | R446 | *C3 | R583 | *A2 | R724 | *B2 | R839 | *B2 | TP106 | C2 |
| R98 | A2 | R204 | *C2 | R325 | D2 | R447 | *C2 | R584 | *A2 | R725 | *B2 | R840 | *B2 | TP201 | C2 |
| R99 | C3 | R205 | *C2 | R326 | D2 | R448 | *C2 | R585 | *A2 | R726 | *B2 | R841 | *B2 | TP202 | D2 |
| R100 | C3 | R206 | *C2 | R327 | *D2 | R449 | *C2 | R586 | *A2 | R727 | *B2 | R842 | *B2 | TP203 | D2 |
| R101 | D3 | R207 | *C2 | R328 | *D2 | R450 | *C2 | R587 | *A2 | R728 | *B2 | R851 | A3 | TP204 | D2 |
| R102 | D3 | R208 | *C3 | R329 | *D2 | R451 | *B2 | R588 | *A2 | R729 | *B2 | R852 | *A3 | TP205 | D2 |
| R103 | D3 | R216 | *C2 | R330 | *D2 | R452 | *B2 | R589 | A2 | R730 | *B2 | R853 | *A3 | TP206 | D2 |
| R104 | D2 | R217 | *C2 | R331 | *D2 | R453 | *B2 | R590 | A2 | R731 | *B2 | | | TP207 | D1 |
| R105 | D2 | R218 | *C2 | R332 | *D2 | R454 | *B2 | R591 | A2 | R732 | *B2 | RB531 | *B3 | TP208 | D1 |
| R106 | D2 | R219 | *C2 | R333 | *D2 | R461 | *B2 | R592 | A2 | R733 | *B3 | RB532 | *A3 | TP209 | D1 |
| R108 | *D2 | R220 | *C2 | R334 | D2 | R462 | *B2 | R593 | *A2 | R734 | *B2 | RB533 | A3 | TP210 | D1 |
| R109 | *D3 | R221 | *C2 | R335 | *D2 | R463 | *C2 | R601 | C3 | R735 | *B2 | RB534 | A3 | TP401 | B2 |
| R110 | *D3 | R222 | *C2 | R336 | *D2 | R464 | *C2 | R602 | *C3 | R736 | *B2 | RB535 | *A1 | TP601 | C3 |
| R111 | *D3 | R223 | *C2 | R341 | C1 | R465 | *C2 | R603 | *C3 | R737 | *B3 | RB536 | *A1 | TP602 | C3 |
| R112 | *D3 | R224 | *C2 | R342 | C1 | R467 | *C2 | R604 | *C3 | R738 | *B2 | RB537 | *A1 | TP603 | C3 |
| R113 | *D3 | R225 | *C2 | R343 | D1 | R468 | *C2 | R605 | *C3 | R739 | *B2 | RB538 | *A1 | TP604 | C1 |
| R114 | *D3 | R226 | *C2 | R344 | D1 | R469 | *B2 | R606 | *C3 | R740 | B3 | RB601 | C3 | TP605 | B1 |
| R115 | *D3 | R227 | *C2 | R345 | D1 | R470 | B3 | R607 | *C3 | R741 | B3 | RB602 | C3 | TP721 | B3 |
| R116 | *D3 | R228 | *C2 | R346 | D1 | R501 | *A1 | R608 | *C3 | R742 | *B3 | RB603 | C3 | TP801 | B2 |
| R117 | *D3 | R229 | *C2 | R347 | C1 | R502 | *A1 | R609 | *B2 | R743 | B3 | RB604 | *C3 | | |
| R118 | *D3 | R230 | *C2 | R348 | D1 | R503 | *A1 | R610 | *A2 | R744 | B3 | RB605 | *C3 | X101 | D2 |
| R119 | *D3 | R231 | *C2 | R349 | C1 | R504 | *A1 | R611 | A2 | R745 | B3 | RB606 | *C3 | X541 | *A2 |
| R120 | *D3 | R232 | *C2 | R350 | D1 | R505 | A3 | R612 | *B1 | R746 | B3 | RB607 | *B3 | X542 | *A2 |
| R121 | *D3 | R233 | *C2 | R351 | D1 | R506 | *A1 | R613 | *A1 | R747 | B3 | RB608 | *B3 | X543 | A2 |
| R122 | *D3 | R234 | *C2 | R352 | *D1 | R508 | *A1 | R614 | *A1 | R748 | B3 | RB609 | B3 | X544 | A2 |
| R123 | D3 | R241 | *C2 | R353 | *D1 | R509 | *A1 | R615 | *A1 | R749 | B3 | RB610 | B3 | X721 | *B3 |
| R124 | D3 | R242 | *C2 | R354 | *D1 | R510 | A2 | R616 | *B1 | R750 | B3 | RB611 | *B3 | X722 | *B3 |
| R125 | D3 | R243 | *C2 | R355 | *D1 | R511 | A2 | R617 | *A1 | R751 | B3 | RB612 | *B3 | | |
| R126 | D3 | R244 | *C2 | R356 | *D1 | R512 | A2 | R618 | *A1 | R752 | B3 | RB613 | *B2 | *:B SIDE | |
| R127 | D3 | R245 | *C2 | R357 | *D1 | R513 | A2 | R619 | *B1 | R753 | B3 | RB614 | *B2 | | |
| R128 | *D3 | R246 | *C2 | R358 | *D1 | R514 | A2 | R620 | *A1 | R754 | B2 | RB615 | B2 | | |
| R129 | *D3 | R247 | C2 | R359 | D1 | R515 | B2 | R621 | *A1 | R755 | B3 | RB616 | B2 | | |
| R130 | *D3 | R248 | *C3 | R360 | *D1 | R516 | *A1 | R622 | *A1 | R761 | B1 | RB617 | *B2 | | |
| R131 | *D3 | R249 | *C3 | R361 | *D1 | R517 | B2 | R623 | *B1 | R762 | B1 | RB618 | A2 | | |
| R132 | *D3 | R250 | *C3 | R366 | C1 | R518 | *A1 | R624 | *A1 | R763 | *B1 | RB619 | A2 | | |
| R133 | *D3 | R251 | *C3 | R367 | C1 | R519 | A2 | R626 | *B1 | R764 | *B1 | RB620 | A2 | | |
| R134 | *D3 | R252 | *C3 | R368 | D1 | R520 | *A1 | R628 | A1 | R765 | *B1 | RB621 | B2 | | |
| R135 | *D3 | R253 | *C3 | R369 | D1 | R521 | *A1 | R629 | A1 | R766 | *B1 | RB622 | A2 | | |
| R136 | *D2 | R261 | D2 | R370 | D1 | R522 | *A1 | R630 | A1 | R767 | *B1 | RB623 | A2 | | |

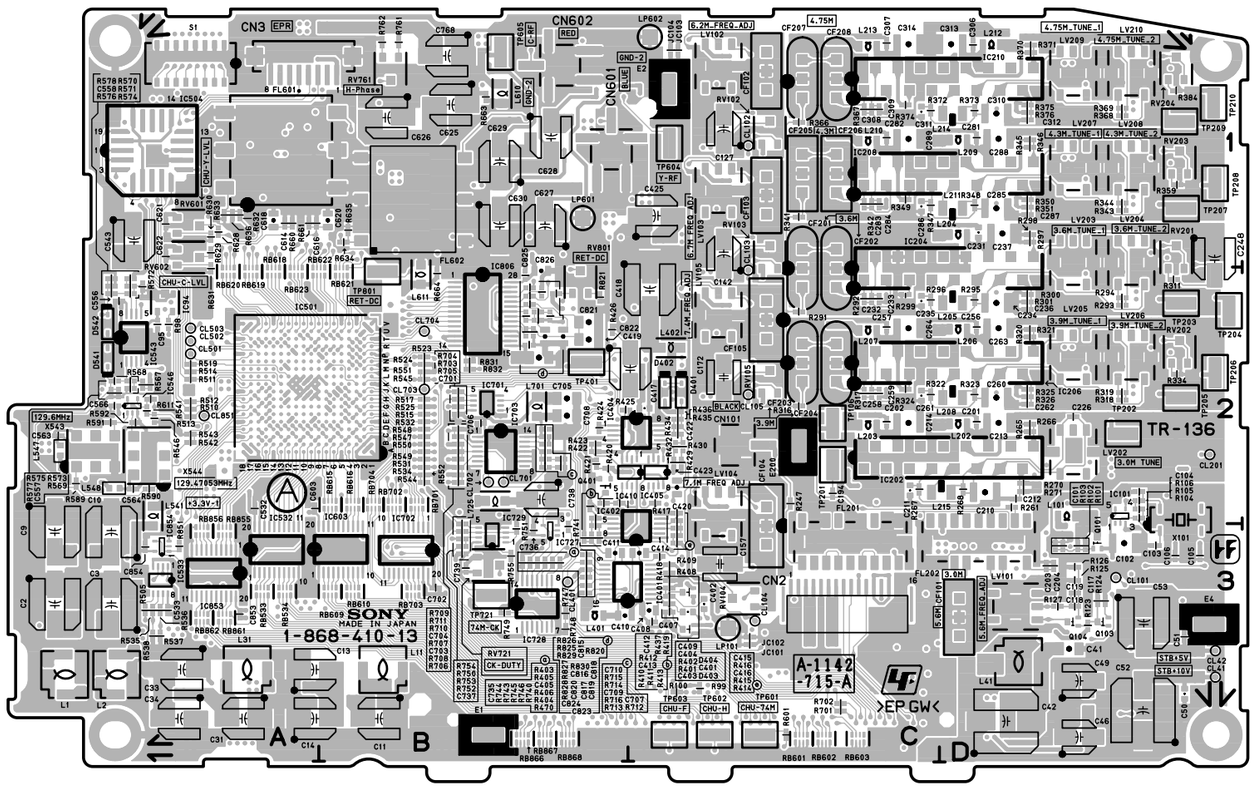TR-136 (1-868-410-14)

| | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| C1 | *C3 | C163 | *C2 | C283 | C1 | C507 | *A2 | C707 | B2 | CL31 | *A3 | IC201 | *C3 | L402 | C2 |
| C2 | A3 | C164 | *C2 | C284 | C1 | C508 | *B2 | C708 | B2 | CL41 | D3 | IC202 | D2 | L403 | *C2 |
| C3 | A3 | C165 | *C2 | C285 | D1 | C509 | *A2 | C709 | B2 | CL42 | D3 | IC203 | *D2 | L404 | *B2 |
| C4 | *A3 | C166 | *C2 | C286 | C1 | C510 | *A2 | C710 | B2 | CL101 | D3 | IC204 | D2 | L405 | *C2 |
| C5 | *A3 | C167 | *C3 | C287 | D1 | C511 | *A2 | C721 | *B2 | CL102 | C1 | IC205 | *D2 | L406 | *C1 |
| C6 | *A3 | C171 | *C2 | C288 | D1 | C512 | *A2 | C722 | *B2 | CL103 | C2 | IC206 | D2 | L501 | *A2 |
| C7 | *A3 | C172 | C2 | C289 | C1 | C513 | *A2 | C723 | *B2 | CL104 | C3 | IC207 | *D2 | L502 | *A2 |
| C8 | *A3 | C173 | *C2 | C290 | *C1 | C514 | *A2 | C724 | *B2 | CL105 | C2 | IC208 | D1 | L503 | *A1 |
| C9 | A3 | C174 | *C2 | C291 | *D1 | C515 | *B2 | C725 | *B2 | CL201 | D2 | IC209 | *D1 | L511 | *A2 |
| C10 | A3 | C175 | *C2 | C292 | *D1 | C516 | *B2 | C726 | *B2 | CL401 | B3 | IC210 | D1 | L512 | *A2 |
| C11 | B3 | C176 | *C2 | C293 | *D1 | C517 | *A2 | C727 | *B2 | CL501 | A2 | IC211 | *D1 | L541 | A2 |
| C12 | *A3 | C177 | *C2 | C294 | *D1 | C518 | *B2 | C728 | *B3 | CL502 | A2 | IC401 | B3 | L542 | *A2 |
| C13 | A3 | C178 | *C2 | C295 | *D1 | C519 | *A2 | C729 | *B2 | CL503 | A2 | IC402 | C3 | L543 | *A1 |
| C14 | A3 | C179 | *C2 | C296 | *D1 | C520 | *A2 | C730 | *B2 | CL701 | B2 | IC404 | C2 | L544 | *A3 |
| C21 | *A3 | C180 | *C2 | C297 | *D1 | C521 | *A2 | C731 | *B2 | CL702 | B2 | IC405 | C2 | L545 | *A2 |
| C22 | *A3 | C181 | *C2 | C298 | *D1 | C522 | *A2 | C732 | *B2 | CL703 | B2 | IC406 | *C3 | L546 | *A2 |
| C31 | A3 | C182 | *C2 | C299 | *D1 | C523 | *A2 | C733 | *B3 | CL704 | B2 | IC407 | *C2 | L547 | A2 |
| C32 | *A3 | C186 | *C2 | C300 | *D1 | C524 | *A2 | C734 | *B3 | CL851 | A2 | IC408 | *C2 | L548 | A2 |
| C33 | A3 | C187 | *C2 | C301 | *D1 | C525 | *A2 | C735 | B3 | | | IC410 | C2 | L601 | *A1 |
| C34 | A3 | C188 | *C2 | C306 | D1 | C526 | *A1 | C736 | B3 | CN1 | *C3 | IC501 | A2 | L602 | *B1 |
| C41 | D3 | C189 | *C2 | C307 | C1 | C527 | *A1 | C737 | B3 | CN2 | C3 | IC504 | A1 | L603 | *A1 |
| C42 | D3 | C190 | *C2 | C308 | C1 | C528 | *A2 | C738 | B2 | CN3 | A1 | IC531 | *A3 | L604 | *B1 |
| C43 | *D3 | C191 | *C3 | C309 | C1 | C529 | *A2 | C739 | B3 | CN101 | C2 | IC532 | A3 | L605 | *B1 |
| C44 | *D3 | C192 | *C3 | C310 | D1 | C531 | *B2 | C761 | *B1 | CN601 | B1 | IC533 | A3 | L606 | *B1 |
| C45 | *D3 | C193 | *C3 | C311 | C1 | C532 | A2 | C762 | *B1 | CN602 | B1 | IC541 | *A2 | L607 | *B1 |
| C46 | D3 | C194 | C2 | C312 | D1 | C533 | A3 | C763 | *B1 | | | IC542 | *A1 | L608 | *B1 |
| C47 | *D3 | C201 | D2 | C313 | D1 | C541 | *A2 | C764 | *B1 | D1 | *A3 | IC543 | A2 | L609 | *B1 |
| C48 | *D3 | C202 | C2 | C314 | C1 | C542 | *A2 | C765 | *B1 | D2 | *A3 | IC545 | *A2 | L610 | B1 |
| C49 | D3 | C203 | D3 | C315 | *C1 | C543 | A1 | C766 | *A1 | D41 | *D3 | IC546 | A2 | L611 | B2 |
| C50 | D3 | C204 | D3 | C316 | *D1 | C544 | *A1 | C767 | *A1 | D42 | *D3 | IC601 | *C3 | L701 | B2 |
| C51 | D3 | C205 | *C2 | C317 | *D1 | C546 | *A2 | C768 | B1 | D43 | *D3 | IC602 | *B3 | L721 | *B2 |
| C52 | D3 | C208 | *C2 | C318 | *D1 | C547 | *A2 | C769 | *A1 | D101 | *D2 | IC603 | B3 | L722 | *B2 |
| C53 | D3 | C209 | *C2 | C319 | *D1 | C548 | *A2 | C770 | *B2 | D102 | *D3 | IC604 | *B3 | L723 | *B3 |
| C92 | *C3 | C210 | D2 | C320 | *D1 | C549 | *A2 | C771 | *B2 | D103 | *D3 | IC605 | *A1 | L724 | *B3 |
| C93 | *C3 | C211 | C2 | C321 | *D1 | C550 | *A2 | C772 | *B2 | D104 | *C1 | IC606 | *B1 | L725 | B2 |
| C94 | *D3 | C212 | D2 | C322 | *D1 | C552 | *A1 | C801 | *B1 | D105 | *C1 | IC607 | *B1 | L761 | *A1 |
| C95 | A2 | C213 | D2 | C323 | *D1 | C553 | *A1 | C802 | *B1 | D106 | *C1 | IC608 | *B1 | L801 | *B1 |
| C101 | D3 | C214 | C2 | C324 | *D1 | C554 | *A2 | C803 | *B1 | D107 | *C1 | IC701 | B2 | L802 | *B1 |
| C102 | D3 | C215 | *C2 | C325 | *D1 | C555 | *A2 | C804 | *B1 | D108 | *C3 | IC702 | B3 | | |
| C103 | D3 | C216 | *D2 | C326 | *D1 | C556 | A2 | C805 | *B1 | D109 | *C3 | IC703 | B2 | LP101 | C3 |
| C104 | D2 | C217 | *D2 | C401 | C3 | C557 | A2 | C806 | *B1 | D110 | *C2 | IC721 | *B2 | LP601 | B1 |
| C105 | D3 | C218 | *D2 | C402 | C3 | C558 | A2 | C807 | *B1 | D111 | *C2 | IC722 | *B2 | LP602 | C1 |
| C106 | D3 | C219 | *D2 | C403 | C3 | C559 | *A3 | C808 | *B1 | D112 | *C2 | IC725 | *B3 | | |
| C107 | *D3 | C220 | *D2 | C404 | C3 | C560 | *A2 | C809 | *B1 | D113 | *C2 | IC727 | B3 | LV101 | D3 |
| C108 | *D3 | C221 | *D2 | C405 | B3 | C561 | *A2 | C810 | *B1 | D201 | *D2 | IC728 | B3 | LV102 | C1 |
| C109 | *D3 | C222 | *D2 | C407 | C3 | C562 | *A2 | C811 | *B1 | D202 | *C1 | IC729 | B3 | LV103 | C1 |
| C110 | *D3 | C223 | *D2 | C408 | C3 | C563 | A2 | C812 | *B1 | D205 | *C2 | IC761 | *B1 | LV104 | C2 |
| C111 | *D3 | C224 | *D2 | C409 | C3 | C564 | A2 | C813 | *B1 | D208 | *C1 | IC763 | *A1 | LV105 | C2 |
| C112 | *D3 | C225 | *D2 | C410 | B3 | C565 | *A2 | C814 | *B1 | D211 | *C1 | IC801 | *B1 | LV202 | D2 |
| C113 | *D3 | C226 | D2 | C411 | B3 | C566 | A2 | C815 | B2 | D214 | *D2 | IC802 | *B1 | LV203 | D1 |
| C114 | *D3 | C231 | D1 | C412 | B2 | C601 | *C3 | C816 | B2 | D401 | C2 | IC803 | *B1 | LV204 | D1 |
| C115 | *D3 | C232 | C2 | C413 | B3 | C602 | *B2 | C817 | B2 | D402 | C2 | IC805 | *B1 | LV205 | D2 |
| C116 | *D3 | C233 | C2 | C414 | C3 | C603 | A2 | C818 | B2 | D403 | C3 | IC806 | B2 | LV206 | D2 |
| C117 | D3 | C234 | D2 | C415 | C2 | C604 | *B2 | C819 | B2 | D404 | C3 | IC807 | *B2 | LV207 | D1 |
| C118 | D3 | C235 | C2 | C416 | C3 | C605 | *A1 | C820 | B2 | D405 | *B1 | IC851 | *A3 | LV208 | D1 |
| C119 | D3 | C236 | D2 | C417 | C2 | C606 | *B1 | C821 | B2 | D406 | *C1 | IC852 | *A3 | LV209 | D1 |
| C120 | *D3 | C237 | D1 | C418 | C2 | C607 | *A1 | C822 | B2 | D541 | A2 | IC853 | A3 | LV210 | D1 |
| C121 | *D3 | C238 | *C1 | C419 | C2 | C608 | *B1 | C823 | B2 | D542 | A2 | IC854 | A3 | | |
| C122 | *D3 | C239 | *D1 | C420 | C2 | C609 | *A1 | C824 | B2 | D721 | *B2 | | | Q1 | *A3 |
| C126 | *C1 | C240 | *D2 | C422 | C2 | C610 | *B1 | C825 | B2 | D722 | *B2 | JC1 | *C3 | Q2 | *A3 |
| C127 | C1 | C241 | *D2 | C423 | C2 | C611 | *A1 | C826 | B2 | D761 | *B1 | JC2 | *C3 | Q41 | *D3 |
| C128 | *C1 | C242 | *D1 | C425 | C1 | C612 | *B1 | C827 | *B2 | | | JC101 | C3 | Q42 | *D3 |
| C129 | *C1 | C243 | *D1 | C431 | *C3 | C613 | *A1 | C828 | *B2 | E1 | B3 | JC102 | C3 | Q101 | D3 |
| C130 | *C1 | C244 | *D1 | C432 | *C3 | C614 | A1 | C829 | *B2 | E2 | C1 | JC103 | C1 | Q102 | *D3 |
| C131 | *C1 | C245 | *D1 | C433 | *C3 | C615 | *A1 | C830 | *B2 | E4 | D3 | JC104 | C1 | Q103 | D3 |
| C132 | *C1 | C246 | *D2 | C434 | *B3 | C616 | A1 | C831 | *B2 | E11 | *A1 | | | Q104 | D3 |
| C133 | *C1 | C247 | *D2 | C435 | *B3 | C617 | *A1 | C832 | *B2 | E12 | *B1 | L1 | A3 | Q105 | *D3 |
| C134 | *C1 | C248 | D1 | C436 | *C3 | C618 | A1 | C833 | *B2 | E13 | *C1 | L2 | A3 | Q106 | *C1 |
| C135 | *C1 | C249 | *D2 | C437 | *C2 | C619 | *B1 | C834 | *B2 | E200 | C2 | L11 | B3 | Q107 | *C1 |
| C136 | *C1 | C256 | D2 | C438 | *B3 | C620 | B1 | C851 | *A3 | | | L21 | *A3 | Q108 | *C1 |
| C137 | *C1 | C257 | C2 | C439 | *C2 | C621 | A1 | C852 | *A3 | FL201 | C3 | L31 | A3 | Q109 | *C1 |
| C138 | *C1 | C258 | C2 | C440 | *C2 | C622 | A1 | C853 | A3 | FL202 | D3 | L41 | D3 | Q110 | *C1 |
| C141 | *C1 | C259 | C2 | C441 | *B3 | C623 | *B1 | C854 | A3 | FL601 | A1 | L101 | D2 | Q111 | *C1 |
| C142 | C1 | C260 | D2 | C442 | *B2 | C624 | *B1 | | | FL602 | B1 | L104 | *C3 | Q112 | *C3 |
| C143 | *C1 | C261 | C2 | C443 | *B2 | C625 | B1 | CF101 | D3 | | | L105 | *C2 | Q113 | *C2 |
| C144 | *C1 | C262 | D2 | C444 | *C2 | C626 | B1 | CF102 | C1 | IC1 | *A3 | L106 | *C2 | Q114 | *C2 |
| C145 | *C1 | C263 | D2 | C445 | *C2 | C627 | B1 | CF103 | C1 | IC11 | *B3 | L201 | *C2 | Q115 | *C2 |
| C146 | *C1 | C264 | C2 | C451 | *B1 | C628 | B1 | CF104 | C3 | IC21 | *A3 | L202 | D2 | Q116 | *C2 |
| C147 | *C1 | C265 | *C2 | C452 | *B1 | C629 | B1 | CF105 | C2 | IC31 | *A3 | L203 | C2 | Q117 | *C2 |
| C148 | *C1 | C266 | *D2 | C453 | *C2 | C630 | B1 | CF201 | C2 | IC41 | *D3 | L204 | D1 | Q201 | *D2 |
| C149 | *C1 | C267 | *D2 | C454 | *B2 | C631 | *C1 | CF202 | C2 | IC42 | *D3 | L205 | D2 | Q202 | *D2 |
| C150 | *C1 | C268 | *D2 | C455 | *C2 | C632 | *B1 | CF203 | C2 | IC61 | *D2 | L206 | D2 | Q401 | B2 |
| C151 | *C1 | C269 | *D2 | C456 | *B2 | C633 | *B1 | CF204 | C2 | IC63 | *D2 | L207 | C2 | Q541 | *A2 |
| C152 | *C1 | C270 | *D2 | C457 | *B2 | C634 | *B1 | CF205 | C1 | IC92 | *C3 | L208 | D2 | Q542 | *A2 |
| C153 | *C1 | C271 | *D2 | C458 | *C2 | C635 | *B1 | CF206 | C1 | IC93 | *C3 | L209 | D1 | Q543 | *A2 |
| C156 | *C3 | C272 | *D2 | C459 | *C1 | C636 | *B1 | CF207 | C1 | IC94 | A2 | L210 | C1 | Q721 | *B3 |
| C157 | C3 | C273 | *D2 | C501 | *A2 | C701 | B2 | CF208 | C1 | IC101 | D2 | L211 | D1 | Q722 | *B3 |
| C158 | *C3 | C274 | *D2 | C502 | *A2 | C702 | B3 | | | IC102 | *D3 | L212 | D1 | Q761 | *B1 |
| C159 | *C3 | C275 | *D2 | C503 | *B2 | C703 | B2 | CL1 | *A3 | IC103 | *D3 | L213 | C1 | Q801 | *B2 |
| C160 | *C2 | C276 | *D2 | C504 | *B2 | C704 | B2 | CL2 | *A3 | IC104 | *D3 | L214 | D1 | Q802 | *B2 |
| C161 | *C2 | C281 | D1 | C505 | *B2 | C705 | B2 | CL11 | *A3 | IC105 | *C2 | L215 | D2 | | |
| C162 | *C2 | C282 | C1 | C506 | *B2 | C706 | B2 | CL21 | *A3 | IC106 | *D2 | L401 | B3 | R1 | *A3 |

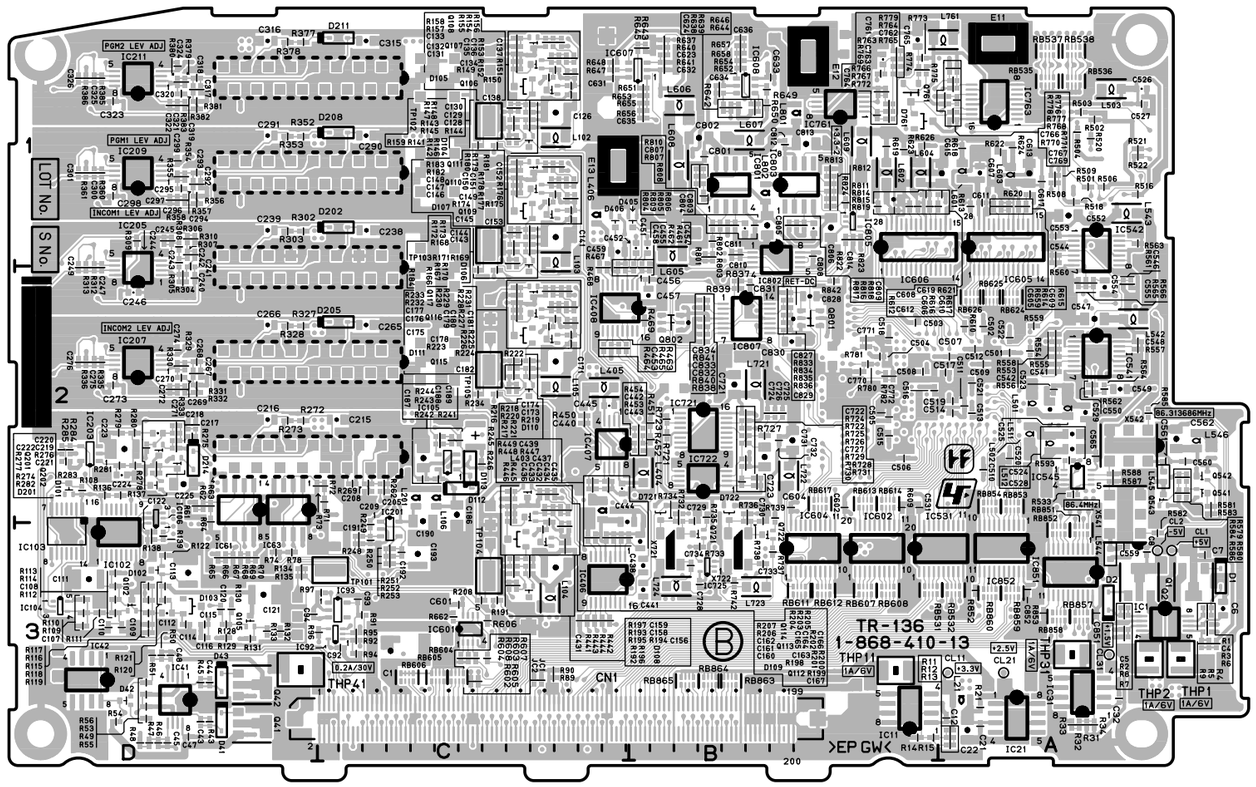


**TR-136** -A SIDE-
SUFFIX: -14




**TR-136** -B SIDE-
SUFFIX: -14

| | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| R2 | *A3 | R137 | *D2 | R262 | *C2 | R371 | D1 | R521 | *A1 | R629 | A1 | R766 | *B1 | RB622 | A2 |
| R3 | *A3 | R138 | *D3 | R265 | D2 | R372 | C1 | R522 | *A1 | R630 | A1 | R767 | *B1 | RB623 | A2 |
| R4 | *A3 | R139 | *D3 | R266 | D2 | R373 | D1 | R523 | B2 | R631 | A2 | R768 | *A1 | RB624 | *A2 |
| R5 | *A3 | R141 | *C1 | R267 | C2 | R374 | C1 | R524 | B2 | R632 | A1 | R769 | *B1 | RB625 | *A2 |
| R6 | *A3 | R142 | *C1 | R268 | D2 | R375 | D1 | R525 | B2 | R633 | A1 | R770 | *A1 | RB626 | *A2 |
| R7 | *A3 | R143 | *C1 | R269 | *C2 | R376 | D1 | R531 | B2 | R634 | B1 | R771 | *A1 | RB701 | B2 |
| R8 | *A3 | R144 | *C1 | R270 | D2 | R377 | *D1 | R532 | B2 | R635 | B1 | R772 | *B1 | RB702 | B2 |
| R9 | *A3 | R145 | *C1 | R271 | D2 | R378 | *D1 | R533 | *A2 | R636 | A1 | R773 | *B1 | RB703 | B3 |
| R11 | *A3 | R146 | *C1 | R272 | *D2 | R379 | *D1 | R534 | B2 | R637 | *B1 | R774 | *B1 | RB704 | B2 |
| R12 | *A3 | R147 | *C1 | R273 | *D2 | R380 | *D1 | R535 | A3 | R638 | *B1 | R775 | *B1 | RB851 | *A3 |
| R13 | *A3 | R148 | *C1 | R274 | *D2 | R381 | *D1 | R536 | A3 | R639 | *B1 | R776 | *A1 | RB852 | *A3 |
| R14 | *B3 | R149 | *C1 | R275 | *D2 | R382 | *D1 | R537 | A3 | R640 | *B1 | R777 | *A1 | RB853 | *A2 |
| R15 | *B3 | R150 | *C1 | R276 | *D2 | R383 | *D1 | R538 | A3 | R641 | *B1 | R778 | *A1 | RB854 | *A2 |
| R21 | *A3 | R151 | *C1 | R277 | *D2 | R384 | D1 | R541 | A2 | R642 | *B1 | R779 | *B1 | RB855 | A3 |
| R31 | *A3 | R152 | *C1 | R278 | *D2 | R385 | *D1 | R542 | A2 | R643 | *B1 | R780 | *B2 | RB856 | A3 |
| R32 | *A3 | R153 | *C1 | R279 | *D2 | R386 | *D1 | R543 | A2 | R644 | *B1 | R781 | *B2 | RB857 | *A3 |
| R33 | *A3 | R154 | *C1 | R280 | *D2 | R387 | *C1 | R544 | B2 | R645 | *B1 | R782 | *B2 | RB858 | *A3 |
| R34 | *A3 | R155 | *C1 | R281 | *D2 | R388 | *C1 | R545 | B2 | R646 | *B1 | R801 | *B1 | RB859 | *A3 |
| R43 | *D3 | R156 | *C1 | R282 | *D2 | R401 | C3 | R546 | A2 | R647 | *C1 | R802 | *B1 | RB860 | *A3 |
| R45 | *D3 | R157 | *C1 | R283 | *D2 | R402 | C3 | R547 | B2 | R648 | *C1 | R803 | *B1 | RB861 | A3 |
| R46 | *D3 | R158 | *C1 | R284 | *D2 | R403 | B3 | R548 | B2 | R649 | *B1 | R804 | *B1 | RB862 | A3 |
| R47 | *D3 | R159 | *C1 | R285 | *D2 | R404 | B3 | R549 | B2 | R650 | *B1 | R805 | *B1 | RB863 | *B3 |
| R48 | *D3 | R166 | *C2 | R291 | C2 | R405 | B3 | R550 | B2 | R651 | *B1 | R806 | *B1 | RB864 | *B3 |
| R49 | *D3 | R167 | *C1 | R292 | C2 | R406 | B3 | R551 | B2 | R652 | *B1 | R807 | *B1 | RB865 | *B3 |
| R50 | *D3 | R168 | *C1 | R293 | D2 | R408 | C3 | R552 | B2 | R653 | *B1 | R808 | *B1 | RB866 | B3 |
| R51 | *D3 | R169 | *C1 | R294 | D2 | R409 | C3 | R553 | *A2 | R654 | *B1 | R809 | *B1 | RB867 | B3 |
| R53 | *D3 | R170 | *C1 | R295 | D2 | R410 | B3 | R554 | *A2 | R655 | *B1 | R810 | *B1 | RB868 | B3 |
| R54 | *D3 | R171 | *C1 | R296 | C2 | R411 | B3 | R555 | *A2 | R656 | *B1 | R811 | *B1 | | |
| R55 | *D3 | R172 | *C1 | R297 | D1 | R412 | B2 | R556 | *A2 | R657 | *B1 | R812 | *B1 | RV102 | C1 |
| R56 | *D3 | R173 | *C1 | R298 | D1 | R413 | B3 | R557 | *A2 | R658 | *B1 | R813 | *B1 | RV103 | C1 |
| R61 | *D2 | R174 | *C1 | R299 | C2 | R414 | C3 | R558 | *A2 | R659 | *A1 | R814 | *B1 | RV104 | C3 |
| R62 | *D2 | R175 | *C1 | R300 | D2 | R415 | C3 | R559 | *A2 | R660 | A1 | R815 | *B1 | RV105 | C2 |
| R63 | *D2 | R176 | *C1 | R301 | D2 | R416 | C2 | R560 | *A1 | R661 | A1 | R816 | *B1 | RV201 | D1 |
| R64 | *D2 | R177 | *C1 | R302 | *D1 | R417 | C2 | R561 | *A2 | R662 | *C3 | R817 | *B1 | RV202 | D2 |
| R65 | *D3 | R178 | *C1 | R303 | *D1 | R418 | C3 | R562 | *A2 | R663 | B1 | R818 | *B1 | RV203 | D1 |
| R66 | *D3 | R179 | *C1 | R304 | *D2 | R419 | B2 | R563 | *A1 | R664 | B2 | R819 | *B1 | RV204 | D1 |
| R67 | *D3 | R180 | *C1 | R305 | *D2 | R420 | B2 | R564 | *A2 | R701 | C3 | R820 | B2 | RV601 | A1 |
| R68 | *D3 | R181 | *C1 | R306 | *D1 | R421 | B2 | R565 | *A2 | R702 | C3 | R821 | B2 | RV602 | A1 |
| R69 | *D3 | R182 | *C1 | R307 | *D1 | R422 | B2 | R566 | *A2 | R703 | B2 | R822 | *B1 | RV721 | B3 |
| R70 | *D3 | R183 | *C1 | R308 | *D1 | R423 | B2 | R567 | A2 | R704 | B2 | R823 | *B1 | RV761 | B1 |
| R71 | *C2 | R184 | *C2 | R309 | *D1 | R424 | B2 | R568 | A2 | R705 | B2 | R824 | *B1 | RV801 | B2 |
| R72 | *C2 | R191 | *C3 | R310 | *D1 | R425 | B2 | R569 | A2 | R706 | B2 | R825 | B2 | | |
| R73 | *D2 | R192 | *C3 | R311 | D2 | R426 | B2 | R570 | A2 | R707 | B2 | R826 | B2 | S1 | A1 |
| R74 | *D3 | R193 | *C3 | R312 | *D2 | R429 | C2 | R571 | A2 | R708 | B2 | R827 | B2 | | |
| R78 | *D3 | R194 | *C3 | R313 | *D2 | R430 | C2 | R572 | A2 | R709 | B2 | R828 | B2 | THP1 | *A3 |
| R89 | *C3 | R195 | *C3 | R316 | C2 | R432 | C2 | R573 | A2 | R710 | B2 | R829 | B2 | THP2 | *A3 |
| R90 | *C3 | R196 | *C3 | R317 | C2 | R434 | C2 | R574 | A2 | R711 | B2 | R830 | B2 | THP11 | *B3 |
| R91 | *C3 | R197 | *C3 | R318 | D2 | R435 | C2 | R575 | A2 | R712 | B2 | R831 | B2 | THP31 | *A3 |
| R92 | *C3 | R198 | *C3 | R319 | D2 | R436 | C2 | R576 | A2 | R713 | B2 | R832 | B2 | THP41 | *D3 |
| R93 | *C3 | R199 | *C3 | R320 | D2 | R437 | B2 | R577 | A2 | R714 | B2 | R833 | *B2 | | |
| R94 | *C3 | R200 | *C3 | R321 | D2 | R441 | *C3 | R578 | A2 | R715 | B2 | R834 | *B2 | TP101 | *C3 |
| R95 | *C3 | R201 | *C3 | R322 | C2 | R442 | *C3 | R579 | *A2 | R716 | B2 | R835 | *B2 | TP102 | *C1 |
| R96 | *C3 | R202 | *C2 | R323 | D2 | R443 | *C3 | R580 | *A2 | R721 | *B2 | R836 | *B2 | TP103 | *C1 |
| R97 | *C3 | R203 | *C2 | R324 | C2 | R444 | *C3 | R581 | *A2 | R722 | *B2 | R837 | *B2 | TP104 | *C3 |
| R98 | A2 | R204 | *C2 | R325 | D2 | R445 | *C3 | R582 | *A3 | R723 | *B2 | R838 | *B2 | TP105 | *C2 |
| R99 | C3 | R205 | *C2 | R326 | D2 | R446 | *C3 | R583 | *A2 | R724 | *B2 | R839 | *B2 | TP106 | C2 |
| R100 | C3 | R206 | *C2 | R327 | *D2 | R447 | *C2 | R584 | *A2 | R725 | *B2 | R840 | *B2 | TP201 | C2 |
| R101 | D3 | R207 | *C2 | R328 | *D2 | R448 | *C2 | R585 | *A2 | R726 | *B2 | R841 | *B2 | TP202 | D2 |
| R102 | D3 | R208 | *C3 | R329 | *D2 | R449 | *C2 | R586 | *A2 | R727 | *B2 | R842 | *B2 | TP203 | D2 |
| R103 | D3 | R216 | *C2 | R330 | *D2 | R450 | *C2 | R587 | *A2 | R728 | *B2 | R851 | A3 | TP204 | D2 |
| R104 | D2 | R217 | *C2 | R331 | *D2 | R451 | *B2 | R588 | *A2 | R729 | *B2 | R852 | *A3 | TP205 | D2 |
| R105 | D2 | R218 | *C2 | R332 | *D2 | R452 | *B2 | R589 | A2 | R730 | *B2 | R853 | *A3 | TP206 | D2 |
| R106 | D2 | R219 | *C2 | R333 | *D2 | R453 | *B2 | R590 | A2 | R731 | *B2 | | | TP207 | D1 |
| R108 | *D2 | R220 | *C2 | R334 | D2 | R454 | *B2 | R591 | A2 | R732 | *B2 | RB531 | *B3 | TP208 | D1 |
| R109 | *D3 | R221 | *C2 | R335 | *D2 | R461 | *B2 | R592 | A2 | R733 | *B3 | RB532 | *A3 | TP209 | D1 |
| R110 | *D3 | R222 | *C2 | R336 | *D2 | R462 | *B2 | R593 | *A2 | R734 | *B2 | RB533 | A3 | TP210 | D1 |
| R111 | *D3 | R223 | *C2 | R341 | C1 | R463 | *C2 | R601 | C3 | R735 | *B2 | RB534 | A3 | TP401 | B2 |
| R112 | *D3 | R224 | *C2 | R342 | C1 | R464 | *C2 | R602 | *C3 | R736 | *B2 | RB535 | *A1 | TP601 | C3 |
| R113 | *D3 | R225 | *C2 | R343 | D1 | R465 | *C2 | R603 | *C3 | R737 | *B3 | RB536 | *A1 | TP602 | C3 |
| R114 | *D3 | R226 | *C2 | R344 | D1 | R467 | *C2 | R604 | *C3 | R738 | *B2 | RB537 | *A1 | TP603 | C3 |
| R115 | *D3 | R227 | *C2 | R345 | D1 | R468 | *C2 | R605 | *C3 | R739 | *B2 | RB538 | *A1 | TP604 | C1 |
| R116 | *D3 | R228 | *C2 | R346 | D1 | R469 | *B2 | R606 | *C3 | R740 | B3 | RB601 | C3 | TP605 | B1 |
| R117 | *D3 | R229 | *C2 | R347 | C1 | R470 | B3 | R607 | *C3 | R741 | B3 | RB602 | C3 | TP721 | B3 |
| R118 | *D3 | R230 | *C2 | R348 | D1 | R501 | *A1 | R608 | *C3 | R742 | *B3 | RB603 | C3 | TP801 | B2 |
| R119 | *D3 | R231 | *C2 | R349 | C1 | R502 | *A1 | R609 | *B2 | R743 | B3 | RB604 | *C3 | | |
| R120 | *D3 | R232 | *C2 | R350 | D1 | R503 | *A1 | R610 | *A2 | R744 | B3 | RB605 | *C3 | X101 | D2 |
| R121 | *D3 | R233 | *C2 | R351 | D1 | R504 | *A1 | R611 | A2 | R745 | B3 | RB606 | *C3 | X541 | *A2 |
| R122 | *D3 | R234 | *C2 | R352 | *D1 | R505 | A3 | R612 | *B1 | R746 | B3 | RB607 | *B3 | X542 | *A2 |
| R123 | D3 | R241 | *C2 | R353 | *D1 | R506 | *A1 | R613 | *A1 | R747 | B3 | RB608 | *B3 | X543 | A2 |
| R124 | D3 | R242 | *C2 | R354 | *D1 | R508 | *A1 | R614 | *A1 | R748 | B3 | RB609 | B3 | X544 | A2 |
| R125 | D3 | R243 | *C2 | R355 | *D1 | R509 | *A1 | R615 | *A1 | R749 | B3 | RB610 | B3 | X721 | *B3 |
| R126 | D3 | R244 | *C2 | R356 | *D1 | R510 | A2 | R616 | *B1 | R750 | B3 | RB611 | *B3 | X722 | *B3 |
| R127 | D3 | R245 | *C2 | R357 | *D1 | R511 | A2 | R617 | *A1 | R751 | B3 | RB612 | *B3 | | |
| R128 | *D3 | R246 | *C2 | R358 | *D1 | R512 | A2 | R618 | *A1 | R752 | B3 | RB613 | *B2 | *:B SIDE | |
| R129 | *D3 | R247 | C2 | R359 | D1 | R513 | A2 | R619 | *B1 | R753 | B3 | RB614 | *B2 | | |
| R130 | *D3 | R248 | *C3 | R360 | *D1 | R514 | A2 | R620 | *A1 | R754 | B2 | RB615 | B2 | | |
| R131 | *D3 | R249 | *C3 | R361 | *D1 | R515 | B2 | R621 | *A1 | R755 | B3 | RB616 | B2 | | |
| R132 | *D3 | R250 | *C3 | R366 | C1 | R516 | *A1 | R622 | *A1 | R761 | B1 | RB617 | *B2 | | |
| R133 | *D3 | R251 | *C3 | R367 | C1 | R517 | B2 | R623 | *B1 | R762 | B1 | RB618 | A2 | | |
| R134 | *D3 | R252 | *C3 | R368 | D1 | R518 | *A1 | R624 | *A1 | R763 | *B1 | RB619 | A2 | | |
| R135 | *D3 | R253 | *C3 | R369 | D1 | R519 | A2 | R626 | *B1 | R764 | *B1 | RB620 | A2 | | |
| R136 | *D2 | R261 | D2 | R370 | D1 | R520 | *A1 | R628 | A1 | R765 | *B1 | RB621 | B2 | | |

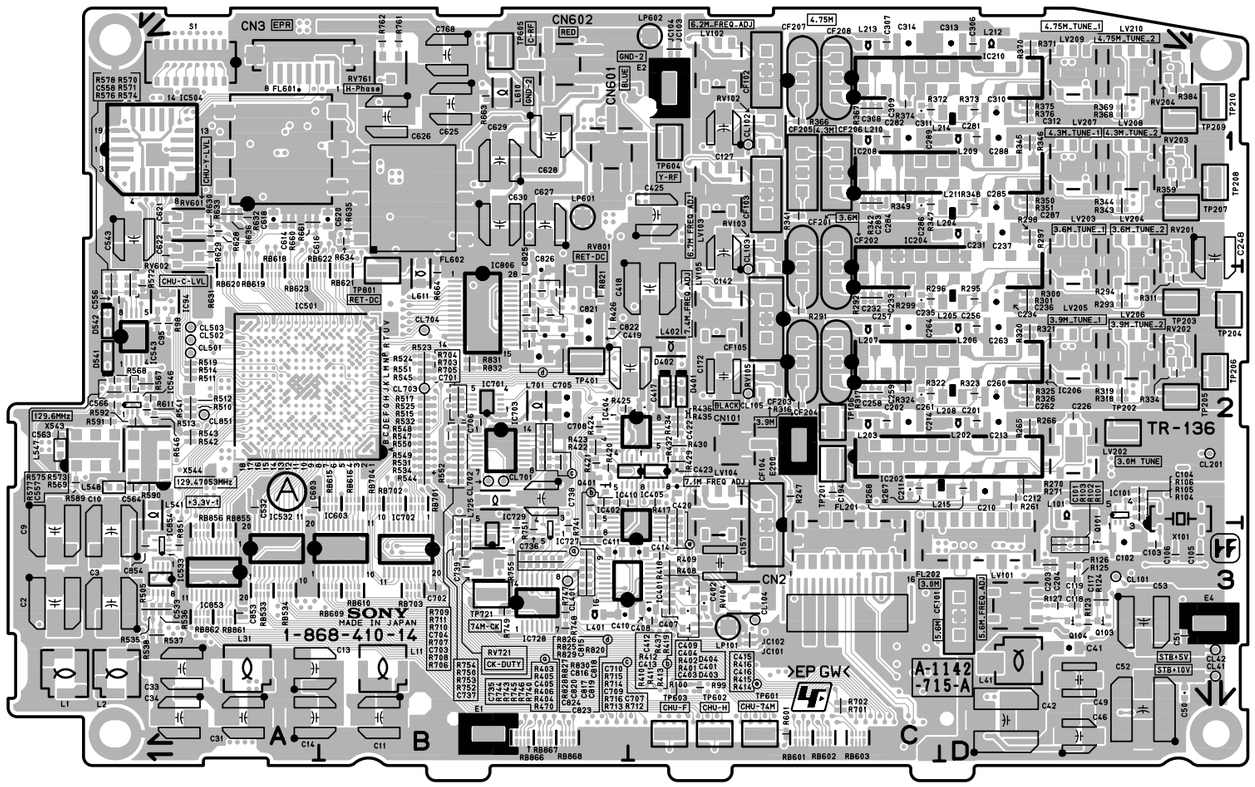TR-136 (1-868-410-15,32)

| | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| C1 | *C3 | C161 | *C2 | C281 | D1 | C505 | *B2 | C705 | B2 | CL11 | *A3 | IC105 | *C2 | L215 | D2 |
| C2 | A3 | C162 | *C2 | C282 | C1 | C506 | *B2 | C706 | B2 | CL21 | *A3 | IC106 | *D2 | L401 | B3 |
| C3 | A3 | C163 | *C2 | C283 | C1 | C507 | *A2 | C707 | B2 | CL31 | *A3 | IC201 | *C3 | L402 | C2 |
| C4 | *A3 | C164 | *C2 | C284 | C1 | C508 | *B2 | C708 | B2 | CL41 | D3 | IC202 | C2 | L403 | *C2 |
| C5 | *A3 | C165 | *C2 | C285 | D1 | C509 | *A2 | C709 | B2 | CL42 | D3 | IC203 | *D2 | L404 | *B2 |
| C6 | *A3 | C166 | *C2 | C286 | C1 | C510 | *A2 | C710 | B2 | CL101 | D3 | IC204 | C2 | L405 | *C2 |
| C7 | *A3 | C167 | *C3 | C287 | D1 | C511 | *A2 | C721 | *B2 | CL102 | C1 | IC205 | *D2 | L406 | *C1 |
| C8 | *A3 | C171 | *C2 | C288 | D1 | C512 | *A2 | C722 | *B2 | CL103 | C2 | IC206 | C2 | L501 | *A2 |
| C9 | A3 | C172 | C2 | C289 | C1 | C513 | *A2 | C723 | *B2 | CL104 | C3 | IC207 | *D2 | L502 | *A2 |
| C10 | A3 | C173 | *C2 | C290 | *C1 | C514 | *A2 | C724 | *B2 | CL105 | C2 | IC208 | C1 | L503 | *A1 |
| C11 | B3 | C174 | *C2 | C291 | *D1 | C515 | *B2 | C725 | *B2 | CL201 | D2 | IC209 | *D1 | L511 | *A2 |
| C12 | *A3 | C175 | *C2 | C292 | *D1 | C516 | *B2 | C726 | *B2 | CL401 | B3 | IC210 | C1 | L512 | *A2 |
| C13 | A3 | C176 | *C2 | C293 | *D1 | C517 | *A2 | C727 | *B2 | CL501 | A2 | IC211 | *D1 | L541 | A2 |
| C14 | A3 | C177 | *C2 | C294 | *D1 | C518 | *B2 | C728 | *B3 | CL502 | A2 | IC401 | C3 | L542 | *A2 |
| C21 | *A3 | C178 | *C2 | C295 | *D1 | C519 | *A2 | C729 | *B2 | CL503 | A2 | IC402 | C3 | L543 | *A1 |
| C22 | *A3 | C179 | *C2 | C296 | *D1 | C520 | *A2 | C730 | *B2 | CL701 | B2 | IC404 | B2 | L544 | *A3 |
| C31 | A3 | C180 | *C2 | C297 | *D1 | C521 | *A2 | C731 | *B2 | CL702 | B2 | IC405 | C2 | L545 | *A2 |
| C32 | *A3 | C181 | *C2 | C298 | *D1 | C522 | *A2 | C732 | *B2 | CL703 | B2 | IC406 | *C3 | L546 | *A2 |
| C33 | A3 | C182 | *C2 | C299 | *D1 | C523 | *A2 | C733 | *B3 | CL704 | B2 | IC407 | *C2 | L547 | A2 |
| C34 | A3 | C186 | *C2 | C300 | *D1 | C524 | *A2 | C734 | *B3 | CL851 | A2 | IC408 | *B2 | L548 | A2 |
| C41 | D3 | C187 | *C2 | C301 | *D1 | C525 | *A2 | C735 | B3 | | | IC410 | C2 | L601 | *A1 |
| C42 | D3 | C188 | *C2 | C306 | D1 | C526 | *A1 | C736 | B3 | CN1 | *C3 | IC501 | A2 | L602 | *B1 |
| C43 | *D3 | C189 | *C2 | C307 | C1 | C527 | *A1 | C737 | B3 | CN2 | C3 | IC504 | A1 | L603 | *A1 |
| C44 | *D3 | C190 | *C2 | C308 | C1 | C528 | *A2 | C738 | B2 | CN3 | A1 | IC531 | *B3 | L604 | *B1 |
| C45 | *D3 | C191 | *C3 | C309 | C1 | C529 | *A2 | C739 | B3 | CN101 | C2 | IC532 | A3 | L605 | *B1 |
| C46 | D3 | C192 | *C3 | C310 | D1 | C531 | *B2 | C761 | *B1 | CN601 | B1 | IC533 | A3 | L606 | *B1 |
| C47 | *D3 | C193 | *C3 | C311 | C1 | C532 | A2 | C762 | *B1 | CN602 | B1 | IC541 | *A2 | L607 | *B1 |
| C48 | *D3 | C194 | C2 | C312 | D1 | C533 | A3 | C763 | *B1 | | | IC542 | *A1 | L608 | *B1 |
| C49 | D3 | C201 | D2 | C313 | D1 | C541 | *A2 | C764 | *B1 | D1 | *A3 | IC543 | A2 | L609 | *B1 |
| C50 | D3 | C202 | C2 | C314 | C1 | C542 | *A2 | C765 | *B1 | D2 | *A3 | IC545 | *A2 | L610 | B1 |
| C51 | D3 | C203 | D3 | C315 | *C1 | C543 | A1 | C766 | *A1 | D41 | *D3 | IC546 | A2 | L611 | B2 |
| C52 | D3 | C204 | D3 | C316 | *D1 | C544 | *A1 | C767 | *A1 | D42 | *D3 | IC601 | *C3 | L701 | B2 |
| C53 | D3 | C205 | *C2 | C317 | *D1 | C546 | *A2 | C768 | B1 | D43 | *D3 | IC602 | *B3 | L721 | *B2 |
| C61 | *A3 | C208 | *C2 | C318 | *D1 | C547 | *A2 | C769 | *A1 | D101 | *D2 | IC603 | A3 | L722 | *B2 |
| C62 | *A3 | C209 | *C2 | C319 | *D1 | C548 | *A2 | C770 | *B2 | D102 | *D3 | IC604 | *B3 | L723 | *B3 |
| C92 | *C3 | C210 | D2 | C320 | *D1 | C549 | *A2 | C771 | *B2 | D103 | *D3 | IC605 | *A2 | L724 | *B3 |
| C93 | *C3 | C211 | C2 | C321 | *D1 | C550 | *A2 | C772 | *B2 | D104 | *C1 | IC606 | *B2 | L725 | B2 |
| C94 | *D3 | C212 | D2 | C322 | *D1 | C552 | *A1 | C801 | *B1 | D105 | *C1 | IC607 | *B1 | L761 | *A1 |
| C95 | A2 | C213 | D2 | C323 | *D1 | C553 | *A1 | C802 | *B1 | D106 | *C2 | IC608 | *B1 | L801 | *B1 |
| C101 | D3 | C214 | C2 | C324 | *D1 | C554 | *A2 | C803 | *B1 | D107 | *C1 | IC701 | B2 | L802 | *B1 |
| C102 | D3 | C215 | *C2 | C325 | *D1 | C555 | *A2 | C804 | *B1 | D108 | *C3 | IC702 | B3 | | |
| C103 | D3 | C216 | *D2 | C326 | *D1 | C556 | A2 | C805 | *B1 | D109 | *C3 | IC703 | B2 | LP101 | C3 |
| C104 | D2 | C217 | *D2 | C401 | C3 | C557 | A2 | C806 | *B1 | D110 | *C2 | IC721 | *B2 | LP601 | B1 |
| C105 | D3 | C218 | *D2 | C402 | C3 | C558 | A2 | C807 | *B1 | D111 | *C2 | IC722 | *B2 | LP602 | C1 |
| C106 | D3 | C219 | *D2 | C403 | C3 | C559 | *A3 | C808 | *B1 | D112 | *C2 | IC725 | *B3 | | |
| C107 | *D3 | C220 | *D2 | C404 | C3 | C560 | *A2 | C809 | *B1 | D113 | *C2 | IC727 | B3 | LV101 | D3 |
| C108 | *D3 | C221 | *D2 | C405 | B3 | C561 | *A2 | C810 | *B1 | D201 | *D2 | IC728 | B3 | LV102 | C1 |
| C109 | *D3 | C222 | *D2 | C407 | C3 | C562 | *A2 | C811 | *B1 | D202 | *C1 | IC729 | B3 | LV103 | C1 |
| C110 | *D3 | C223 | *D2 | C408 | C3 | C563 | A2 | C812 | *B1 | D205 | *C2 | IC761 | *B1 | LV104 | C2 |
| C111 | *D3 | C224 | *D2 | C409 | C3 | C564 | A2 | C813 | *B1 | D208 | *C1 | IC763 | *A1 | LV105 | C2 |
| C112 | *D3 | C225 | *D2 | C410 | B3 | C565 | *A2 | C814 | *B1 | D211 | *C1 | IC801 | *B1 | LV202 | D2 |
| C113 | *D3 | C226 | D2 | C411 | B3 | C566 | A2 | C815 | B2 | D214 | *D2 | IC802 | *B1 | LV203 | D1 |
| C114 | *D3 | C231 | D1 | C412 | B2 | C601 | *C3 | C816 | B2 | D401 | C2 | IC803 | *B1 | LV204 | D1 |
| C115 | *D3 | C232 | C2 | C413 | B3 | C602 | *B2 | C817 | B2 | D402 | C2 | IC805 | *B1 | LV205 | D2 |
| C116 | *D3 | C233 | C2 | C414 | C3 | C603 | A2 | C818 | B2 | D403 | C3 | IC806 | B2 | LV206 | D2 |
| C117 | D3 | C234 | D2 | C415 | C2 | C604 | *B2 | C819 | B2 | D404 | C3 | IC807 | *B2 | LV207 | D1 |
| C118 | D3 | C235 | C2 | C416 | C3 | C605 | *A1 | C820 | B2 | D405 | *B1 | IC851 | *A3 | LV208 | D1 |
| C119 | D3 | C236 | D2 | C417 | C2 | C606 | *B1 | C821 | B2 | D406 | *C1 | IC852 | *A3 | LV209 | D1 |
| C120 | *D3 | C237 | D1 | C418 | C2 | C607 | *A1 | C822 | B2 | D541 | A2 | IC853 | A3 | LV210 | D1 |
| C121 | *D3 | C238 | *C1 | C419 | C2 | C608 | *B1 | C823 | B2 | D542 | A2 | IC854 | A3 | | |
| C122 | *D3 | C239 | *D1 | C420 | C2 | C609 | *A1 | C824 | B2 | D721 | *B2 | | | Q1 | *A3 |
| C126 | *C1 | C240 | *D2 | C422 | C2 | C610 | *B1 | C825 | B2 | D722 | *B2 | JC1 | *C3 | Q2 | *A3 |
| C127 | C1 | C241 | *D2 | C423 | C2 | C611 | *A1 | C826 | B2 | D761 | *B1 | JC2 | *C3 | Q41 | *D3 |
| C128 | *C1 | C242 | *D1 | C425 | C1 | C612 | *B1 | C827 | *B2 | | | JC101 | C3 | Q42 | *D3 |
| C129 | *C1 | C243 | *D1 | C431 | *C3 | C613 | *A1 | C828 | *B2 | E1 | B3 | JC102 | C3 | Q101 | D3 |
| C130 | *C1 | C244 | *D1 | C432 | *C3 | C614 | A1 | C829 | *B2 | E2 | C1 | JC103 | C1 | Q102 | *D3 |
| C131 | *C1 | C245 | *D1 | C433 | *C3 | C615 | *A1 | C830 | *B2 | E4 | D3 | JC104 | C1 | Q103 | D3 |
| C132 | *C1 | C246 | *D2 | C434 | *B3 | C616 | A1 | C831 | *B2 | E11 | *A1 | | | Q104 | D3 |
| C133 | *C1 | C247 | *D2 | C435 | *B3 | C617 | *A1 | C832 | *B2 | E12 | *B1 | L1 | A3 | Q105 | *D3 |
| C134 | *C1 | C248 | D1 | C436 | *C3 | C618 | A1 | C833 | *B2 | E13 | *C1 | L2 | A3 | Q106 | *C1 |
| C135 | *C1 | C249 | *D2 | C437 | *C2 | C619 | *B1 | C834 | *B2 | E200 | C2 | L11 | B3 | Q107 | *C1 |
| C136 | *C1 | C256 | D2 | C438 | *B3 | C620 | B1 | C851 | *A3 | | | L21 | *A3 | Q108 | *C1 |
| C137 | *C1 | C257 | C2 | C439 | *C2 | C621 | A1 | C852 | *A3 | FL201 | C3 | L31 | A3 | Q109 | *C1 |
| C138 | *C1 | C258 | C2 | C440 | *C2 | C622 | A1 | C853 | A3 | FL202 | D3 | L41 | D3 | Q110 | *C1 |
| C141 | *C1 | C259 | C2 | C441 | *B3 | C623 | *B1 | C854 | A3 | FL601 | A1 | L101 | D2 | Q111 | *C1 |
| C142 | C1 | C260 | D2 | C442 | *B2 | C624 | *B1 | | | FL602 | B1 | L104 | *C3 | Q112 | *C3 |
| C143 | *C1 | C261 | C2 | C443 | *B2 | C625 | B1 | CF101 | D3 | | | L105 | *C2 | Q113 | *C2 |
| C144 | *C1 | C262 | D2 | C444 | *C2 | C626 | B1 | CF102 | C1 | IC1 | *A3 | L106 | *C2 | Q114 | *C2 |
| C145 | *C1 | C263 | D2 | C445 | *C2 | C627 | B1 | CF103 | C1 | IC11 | *B3 | L201 | *C2 | Q115 | *C2 |
| C146 | *C1 | C264 | C2 | C451 | *B1 | C628 | B1 | CF104 | C3 | IC21 | *A3 | L202 | D2 | Q116 | *C2 |
| C147 | *C1 | C265 | *C2 | C452 | *B1 | C629 | B1 | CF105 | C2 | IC31 | *A3 | L203 | C2 | Q117 | *C2 |
| C148 | *C1 | C266 | *D2 | C453 | *C2 | C630 | B1 | CF201 | C2 | IC41 | *D3 | L204 | D1 | Q201 | *D2 |
| C149 | *C1 | C267 | *D2 | C454 | *B2 | C631 | *C1 | CF202 | C2 | IC42 | *D3 | L205 | D2 | Q202 | *D2 |
| C150 | *C1 | C268 | *D2 | C455 | *C2 | C632 | *B1 | CF203 | C2 | IC61 | *D2 | L206 | D2 | Q401 | B2 |
| C151 | *C1 | C269 | *D2 | C456 | *B2 | C633 | *B1 | CF204 | C2 | IC63 | *D2 | L207 | C2 | Q541 | *A2 |
| C152 | *C1 | C270 | *D2 | C457 | *B2 | C634 | *B1 | CF205 | C1 | IC92 | *C3 | L208 | D2 | Q542 | *A2 |
| C153 | *C1 | C271 | *D2 | C458 | *C2 | C635 | *B1 | CF206 | C1 | IC93 | *C3 | L209 | D1 | Q543 | *A2 |
| C156 | *C3 | C272 | *D2 | C459 | *C1 | C636 | *B1 | CF207 | C1 | IC94 | A2 | L210 | C1 | Q721 | *B3 |
| C157 | C3 | C273 | *D2 | C501 | *A2 | C701 | B2 | CF208 | C1 | IC101 | D2 | L211 | D1 | Q722 | *B3 |
| C158 | *C3 | C274 | *D2 | C502 | *A2 | C702 | B3 | | | IC102 | *D3 | L212 | D1 | Q761 | *B1 |
| C159 | *C3 | C275 | *D2 | C503 | *B2 | C703 | B2 | CL1 | *A3 | IC103 | *D3 | L213 | C1 | Q801 | *B2 |
| C160 | *C2 | C276 | *D2 | C504 | *B2 | C704 | B2 | CL2 | *A3 | IC104 | *D3 | L214 | D1 | Q802 | *B2 |

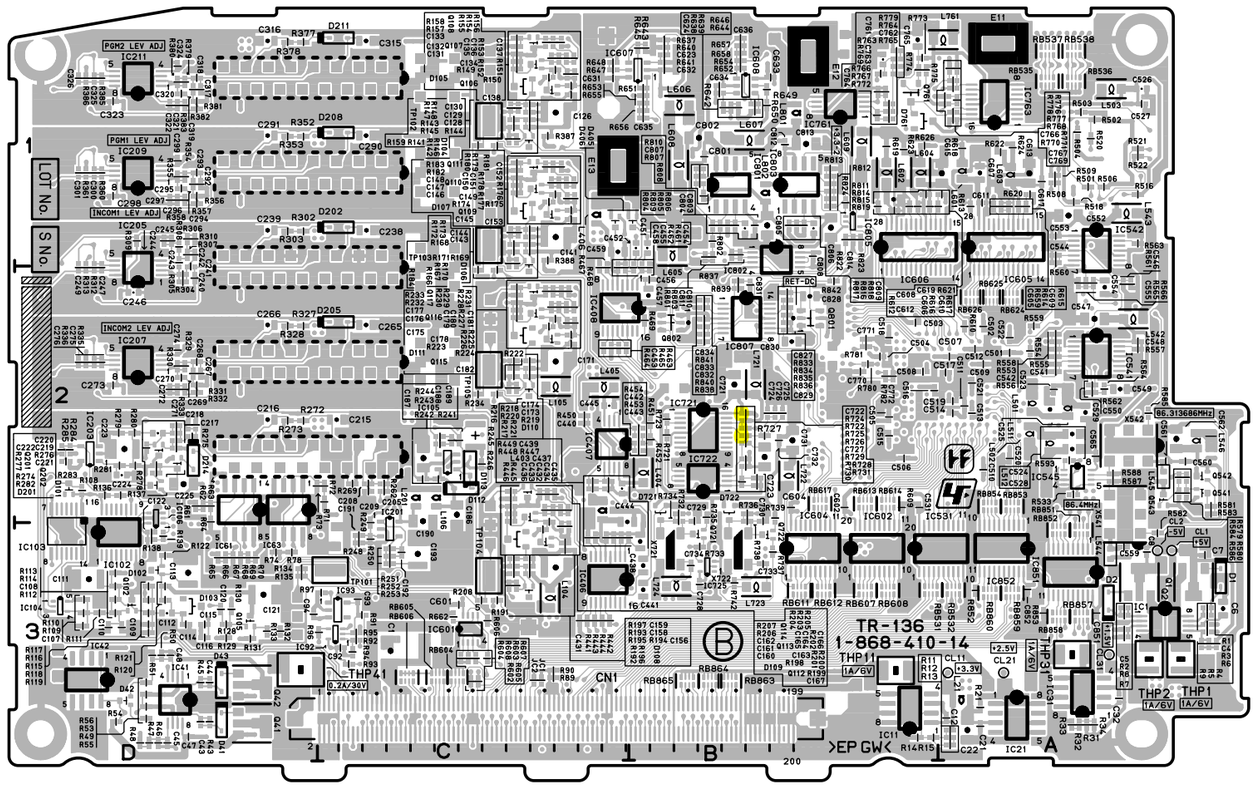


**TR-136** -A SIDE-
SUFFIX: -15, 32




**TR-136** -B SIDE-

SUFFIX: -15, 32
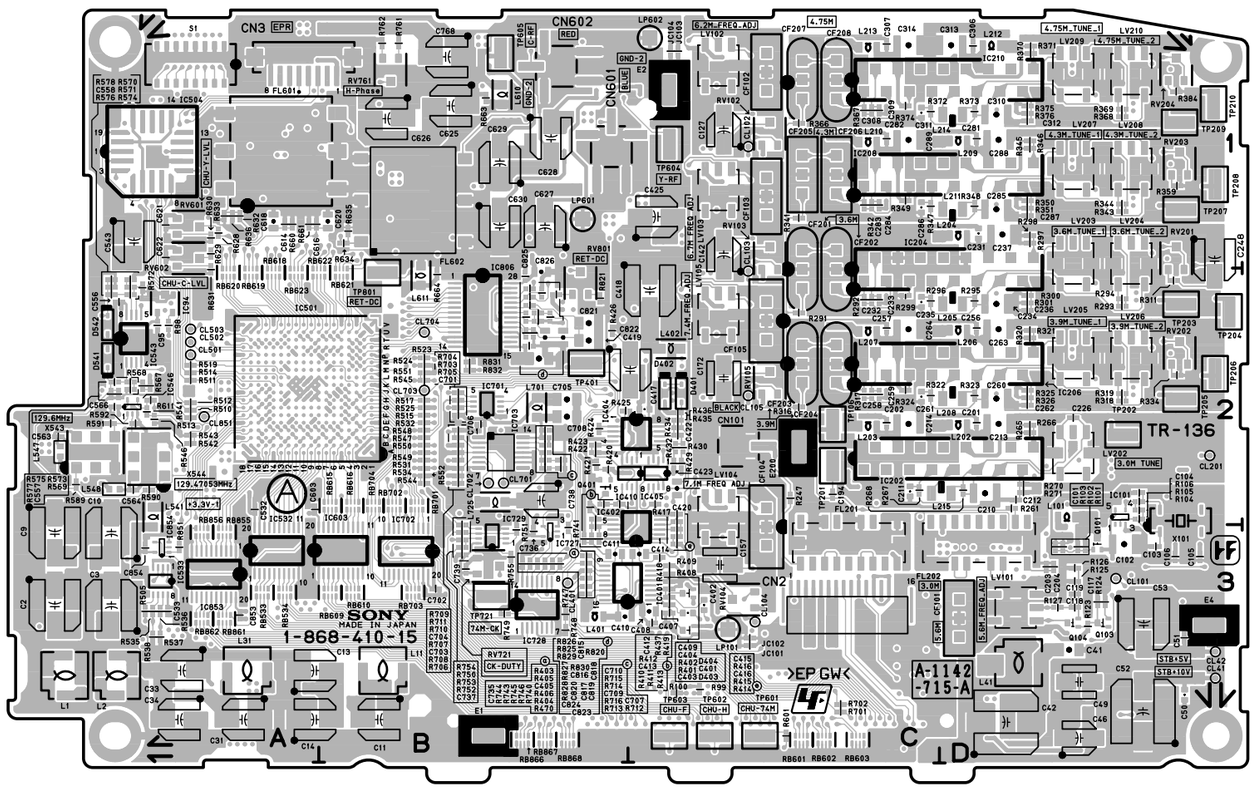
| | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| R1 | *A3 | R136 | *D2 | R261 | D2 | R370 | D1 | R520 | *A1 | R629 | A1 | R766 | *B1 | RB622 | A2 |
| R2 | *A3 | R137 | *D2 | R262 | *C2 | R371 | D1 | R521 | *A1 | R630 | A1 | R767 | *B1 | RB623 | A2 |
| R3 | *A3 | R138 | *D3 | R265 | D2 | R372 | C1 | R522 | *A1 | R631 | A2 | R768 | *A1 | RB624 | *A2 |
| R4 | *A3 | R139 | *D3 | R266 | D2 | R373 | D1 | R523 | B2 | R632 | A1 | R769 | *B1 | RB625 | *A2 |
| R5 | *A3 | R141 | *C1 | R267 | C2 | R374 | C1 | R524 | B2 | R633 | A1 | R770 | *A1 | RB626 | *A2 |
| R6 | *A3 | R142 | *C1 | R268 | D2 | R375 | D1 | R525 | B2 | R634 | B1 | R771 | *A1 | RB701 | B2 |
| R7 | *A3 | R143 | *C1 | R269 | *C2 | R376 | D1 | R531 | B2 | R635 | B1 | R772 | *B1 | RB702 | B2 |
| R8 | *A3 | R144 | *C1 | R270 | D2 | R377 | *D1 | R532 | B2 | R636 | A1 | R773 | *B1 | RB703 | B3 |
| R9 | *A3 | R145 | *C1 | R271 | D2 | R378 | *D1 | R533 | *A2 | R637 | *B1 | R774 | *B1 | RB704 | B2 |
| R11 | *A3 | R146 | *C1 | R272 | *D2 | R379 | *D1 | R534 | B2 | R638 | *B1 | R775 | *B1 | RB851 | *A3 |
| R12 | *A3 | R147 | *C1 | R273 | *D2 | R380 | *D1 | R535 | A3 | R639 | *B1 | R776 | *A1 | RB852 | *A3 |
| R13 | *A3 | R148 | *C1 | R274 | *D2 | R381 | *D1 | R536 | A3 | R640 | *B1 | R777 | *A1 | RB853 | *A2 |
| R14 | *B3 | R149 | *C1 | R275 | *D2 | R382 | *D1 | R537 | A3 | R641 | *B1 | R778 | *A1 | RB854 | *A2 |
| R15 | *B3 | R150 | *C1 | R276 | *D2 | R383 | *D1 | R538 | A3 | R642 | *B1 | R779 | *B1 | RB855 | A3 |
| R21 | *A3 | R151 | *C1 | R277 | *D2 | R384 | D1 | R541 | A2 | R643 | *B1 | R780 | *B2 | RB856 | A3 |
| R31 | *A3 | R152 | *C1 | R278 | *D2 | R385 | *D1 | R542 | A2 | R644 | *B1 | R781 | *B2 | RB857 | *A3 |
| R32 | *A3 | R153 | *C1 | R279 | *D2 | R386 | *D1 | R543 | A2 | R645 | *B1 | R782 | *B2 | RB858 | *A3 |
| R33 | *A3 | R154 | *C1 | R280 | *D2 | R387 | *C1 | R544 | B2 | R646 | *B1 | R801 | *B1 | RB859 | *A3 |
| R34 | *A3 | R155 | *C1 | R281 | *D2 | R388 | *C1 | R545 | B2 | R647 | *C1 | R802 | *B1 | RB860 | *A3 |
| R43 | *D3 | R156 | *C1 | R282 | *D2 | R401 | C3 | R546 | A2 | R648 | *C1 | R803 | *B1 | RB861 | A3 |
| R45 | *D3 | R157 | *C1 | R283 | *D2 | R402 | C3 | R547 | B2 | R649 | *B1 | R804 | *B1 | RB862 | A3 |
| R46 | *D3 | R158 | *C1 | R284 | *D2 | R403 | B3 | R548 | B2 | R650 | *B1 | R805 | *B1 | RB863 | *B3 |
| R47 | *D3 | R159 | *C1 | R285 | *D2 | R404 | B3 | R549 | B2 | R651 | *B1 | R806 | *B1 | RB864 | *B3 |
| R48 | *D3 | R166 | *C2 | R291 | C2 | R405 | B3 | R550 | B2 | R652 | *B1 | R807 | *B1 | RB865 | *B3 |
| R49 | *D3 | R167 | *C1 | R292 | C2 | R406 | B3 | R551 | B2 | R653 | *B1 | R808 | *B1 | RB866 | B3 |
| R50 | *D3 | R168 | *C1 | R293 | D2 | R408 | C3 | R552 | B2 | R654 | *B1 | R809 | *B1 | RB867 | B3 |
| R51 | *D3 | R169 | *C1 | R294 | D2 | R409 | C3 | R553 | *A2 | R655 | *B1 | R810 | *B1 | RB868 | B3 |
| R53 | *D3 | R170 | *C1 | R295 | D2 | R410 | B3 | R554 | *A2 | R656 | *B1 | R811 | *B1 | | |
| R54 | *D3 | R171 | *C1 | R296 | C2 | R411 | B3 | R555 | *A2 | R657 | *B1 | R812 | *B1 | RV102 | C1 |
| R55 | *D3 | R172 | *C1 | R297 | D1 | R412 | B2 | R556 | *A2 | R658 | *B1 | R813 | *B1 | RV103 | C1 |
| R56 | *D3 | R173 | *C1 | R298 | D1 | R413 | B3 | R557 | *A2 | R659 | *A1 | R814 | *B1 | RV104 | C3 |
| R61 | *D2 | R174 | *C1 | R299 | C2 | R414 | C3 | R558 | *A2 | R660 | A1 | R815 | *B1 | RV105 | C2 |
| R62 | *D2 | R175 | *C1 | R300 | D2 | R415 | C3 | R559 | *A2 | R661 | A1 | R816 | *B1 | RV201 | D1 |
| R63 | *D2 | R176 | *C1 | R301 | D2 | R416 | C2 | R560 | *A1 | R662 | *C3 | R817 | *B1 | RV202 | D2 |
| R64 | *D2 | R177 | *C1 | R302 | *D1 | R417 | C2 | R561 | *A2 | R663 | B1 | R818 | *B1 | RV203 | D1 |
| R65 | *D3 | R178 | *C1 | R303 | *D1 | R418 | C3 | R562 | *A2 | R664 | B2 | R819 | *B1 | RV204 | D1 |
| R66 | *D3 | R179 | *C1 | R304 | *D2 | R419 | B2 | R563 | *A1 | R701 | C3 | R820 | B2 | RV601 | A1 |
| R67 | *D3 | R180 | *C1 | R305 | *D2 | R420 | B2 | R564 | *A2 | R702 | C3 | R821 | B2 | RV602 | A1 |
| R68 | *D3 | R181 | *C1 | R306 | *D1 | R421 | B2 | R565 | *A2 | R703 | B2 | R822 | *B1 | RV721 | B3 |
| R69 | *D3 | R182 | *C1 | R307 | *D1 | R422 | B2 | R566 | *A2 | R704 | B2 | R823 | *B1 | RV761 | B1 |
| R70 | *D3 | R183 | *C1 | R308 | *D1 | R423 | B2 | R567 | A2 | R705 | B2 | R824 | *B1 | RV801 | B2 |
| R71 | *C2 | R184 | *C2 | R309 | *D1 | R424 | B2 | R568 | A2 | R706 | B2 | R825 | B2 | | |
| R72 | *C2 | R191 | *C3 | R310 | *D1 | R425 | B2 | R569 | A2 | R707 | B2 | R826 | B2 | S1 | A1 |
| R73 | *D2 | R192 | *C3 | R311 | D2 | R426 | B2 | R570 | A2 | R708 | B2 | R827 | B2 | | |
| R74 | *D3 | R193 | *C3 | R312 | *D2 | R429 | C2 | R571 | A2 | R709 | B2 | R828 | B2 | THP1 | *A3 |
| R78 | *D3 | R194 | *C3 | R313 | *D2 | R430 | C2 | R572 | A2 | R710 | B2 | R829 | B2 | THP2 | *A3 |
| R89 | *C3 | R195 | *C3 | R316 | C2 | R432 | C2 | R573 | A2 | R711 | B2 | R830 | B2 | THP11 | *B3 |
| R90 | *C3 | R196 | *C3 | R317 | C2 | R434 | C2 | R574 | A2 | R712 | B2 | R831 | B2 | THP31 | *A3 |
| R91 | *C3 | R197 | *C3 | R318 | D2 | R435 | C2 | R575 | A2 | R713 | B2 | R832 | B2 | THP41 | *D3 |
| R92 | *C3 | R198 | *C3 | R319 | D2 | R436 | C2 | R576 | A2 | R714 | B2 | R833 | *B2 | | |
| R93 | *C3 | R199 | *C3 | R320 | D2 | R437 | B2 | R577 | A2 | R715 | B2 | R834 | *B2 | TP101 | *C3 |
| R94 | *C3 | R200 | *C3 | R321 | D2 | R441 | *C3 | R578 | A2 | R716 | B2 | R835 | *B2 | TP102 | *C1 |
| R95 | *C3 | R201 | *C3 | R322 | C2 | R442 | *C3 | R579 | *A2 | R721 | *B2 | R836 | *B2 | TP103 | *C1 |
| R96 | *C3 | R202 | *C2 | R323 | D2 | R443 | *C3 | R580 | *A2 | R722 | *B2 | R837 | *B2 | TP104 | *C3 |
| R97 | *C3 | R203 | *C2 | R324 | C2 | R444 | *C3 | R581 | *A2 | R723 | *B2 | R838 | *B2 | TP105 | *C2 |
| R98 | A2 | R204 | *C2 | R325 | D2 | R445 | *C3 | R582 | *A3 | R724 | *B2 | R839 | *B2 | TP106 | C2 |
| R99 | C3 | R205 | *C2 | R326 | D2 | R446 | *C3 | R583 | *A2 | R725 | *B2 | R840 | *B2 | TP201 | C2 |
| R100 | C3 | R206 | *C2 | R327 | *D2 | R447 | *C2 | R584 | *A2 | R726 | *B2 | R841 | *B2 | TP202 | D2 |
| R101 | D3 | R207 | *C2 | R328 | *D2 | R448 | *C2 | R585 | *A2 | R727 | *B2 | R842 | *B2 | TP203 | D2 |
| R102 | D3 | R208 | *C3 | R329 | *D2 | R449 | *C2 | R586 | *A2 | R728 | *B2 | R851 | A3 | TP204 | D2 |
| R103 | D3 | R216 | *C2 | R330 | *D2 | R450 | *C2 | R587 | *A2 | R729 | *B2 | R852 | *A3 | TP205 | D2 |
| R104 | D2 | R217 | *C2 | R331 | *D2 | R451 | *B2 | R588 | *A2 | R730 | *B2 | R853 | *A3 | TP206 | D2 |
| R105 | D2 | R218 | *C2 | R332 | *D2 | R452 | *B2 | R589 | A2 | R731 | *B2 | | | TP207 | D1 |
| R106 | D2 | R219 | *C2 | R333 | *D2 | R453 | *B2 | R590 | A2 | R732 | *B2 | RB531 | *B3 | TP208 | D1 |
| R108 | *D2 | R220 | *C2 | R334 | D2 | R454 | *B2 | R591 | A2 | R733 | *B3 | RB532 | *A3 | TP209 | D1 |
| R109 | *D3 | R221 | *C2 | R335 | *D2 | R461 | *B2 | R592 | A2 | R734 | *B2 | RB533 | A3 | TP210 | D1 |
| R110 | *D3 | R222 | *C2 | R336 | *D2 | R462 | *B2 | R601 | C3 | R735 | *B2 | RB534 | A3 | TP401 | B2 |
| R111 | *D3 | R223 | *C2 | R341 | C1 | R463 | *C2 | R602 | *C3 | R736 | *B2 | RB535 | *A1 | TP601 | C3 |
| R112 | *D3 | R224 | *C2 | R342 | C1 | R464 | *C2 | R603 | *C3 | R737 | *B3 | RB536 | *A1 | TP602 | C3 |
| R113 | *D3 | R225 | *C2 | R343 | D1 | R465 | *C2 | R604 | *C3 | R738 | *B2 | RB537 | *A1 | TP603 | C3 |
| R114 | *D3 | R226 | *C2 | R344 | D1 | R467 | *C2 | R605 | *C3 | R739 | *B2 | RB538 | *A1 | TP604 | C1 |
| R115 | *D3 | R227 | *C2 | R345 | D1 | R468 | *C2 | R606 | *C3 | R740 | B3 | RB601 | C3 | TP605 | B1 |
| R116 | *D3 | R228 | *C2 | R346 | D1 | R469 | *B2 | R607 | *C3 | R741 | B3 | RB602 | C3 | TP721 | B3 |
| R117 | *D3 | R229 | *C2 | R347 | C1 | R470 | B3 | R608 | *C3 | R742 | *B3 | RB603 | C3 | TP801 | B2 |
| R118 | *D3 | R230 | *C2 | R348 | D1 | R501 | *A1 | R609 | *B2 | R743 | B3 | RB604 | *C3 | | |
| R119 | *D3 | R231 | *C2 | R349 | C1 | R502 | *A1 | R610 | *A2 | R744 | B3 | RB605 | *C3 | X101 | D2 |
| R120 | *D3 | R232 | *C2 | R350 | D1 | R503 | *A1 | R611 | A2 | R745 | B3 | RB606 | *C3 | X541 | *A2 |
| R121 | *D3 | R233 | *C2 | R351 | D1 | R504 | *A1 | R612 | *B1 | R746 | B3 | RB607 | *B3 | X542 | *A2 |
| R122 | *D3 | R234 | *C2 | R352 | *D1 | R505 | A3 | R613 | *A1 | R747 | B3 | RB608 | *B3 | X543 | A2 |
| R123 | D3 | R241 | *C2 | R353 | *D1 | R506 | *A1 | R614 | *A1 | R748 | B3 | RB609 | B3 | X544 | A2 |
| R124 | D3 | R242 | *C2 | R354 | *D1 | R508 | *A1 | R615 | *A1 | R749 | B3 | RB610 | B3 | X721 | *B3 |
| R125 | D3 | R243 | *C2 | R355 | *D1 | R509 | *A1 | R616 | *B1 | R750 | B3 | RB611 | *B3 | X722 | *B3 |
| R126 | D3 | R244 | *C2 | R356 | *D1 | R510 | A2 | R617 | *A1 | R751 | B3 | RB612 | *B3 | | |
| R127 | D3 | R245 | *C2 | R357 | *D1 | R511 | A2 | R618 | *A1 | R752 | B3 | RB613 | *B2 | *:B SIDE | |
| R128 | *D3 | R246 | *C2 | R358 | *D1 | R512 | A2 | R619 | *B1 | R753 | B3 | RB614 | *B2 | | |
| R129 | *D3 | R247 | C2 | R359 | D1 | R513 | A2 | R620 | *A1 | R754 | B3 | RB615 | B2 | | |
| R130 | *D3 | R248 | *C3 | R360 | *D1 | R514 | A2 | R621 | *A1 | R755 | B3 | RB616 | B2 | | |
| R131 | *D3 | R249 | *C3 | R361 | *D1 | R515 | B2 | R622 | *A1 | R761 | B1 | RB617 | *B2 | | |
| R132 | *D3 | R250 | *C3 | R366 | C1 | R516 | *A1 | R623 | *B1 | R762 | B1 | RB618 | A2 | | |
| R133 | *D3 | R251 | *C3 | R367 | C1 | R517 | B2 | R624 | *A1 | R763 | *B1 | RB619 | A2 | | |
| R134 | *D3 | R252 | *C3 | R368 | D1 | R518 | *A1 | R626 | *B1 | R764 | *B1 | RB620 | A2 | | |
| R135 | *D3 | R253 | *C3 | R369 | D1 | R519 | A2 | R628 | A1 | R765 | *B1 | RB621 | B2 | | |

VDA-63 (1-865-931-12)
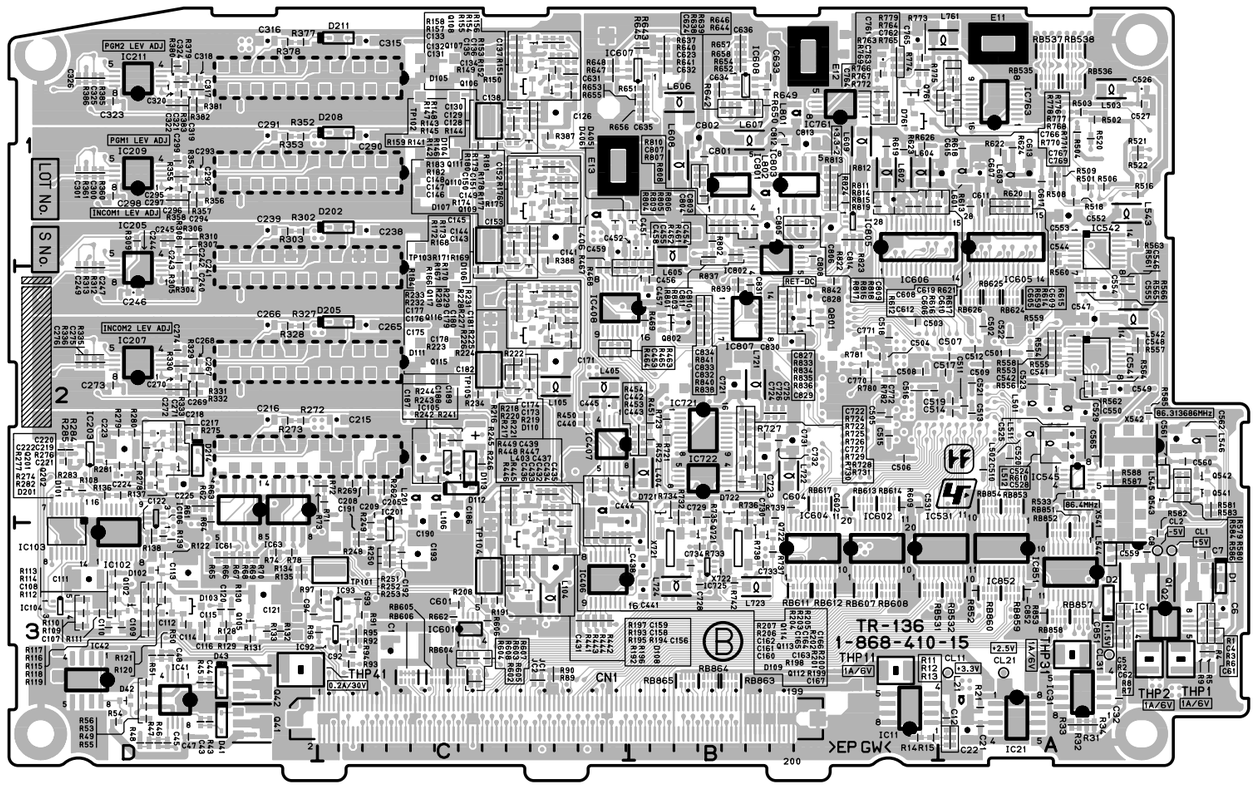
| | | | | | | | | | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| C1 | *C4 | C153 | A3 | C355 | A2 | | | | | | | | | | | | | | | | | | |
| C2 | C1 | C154 | *B3 | C356 | *A2 | | | | | | | | | | | | | | | | | | |
| C3 | *C1 | C155 | A3 | C357 | *C3 | | | | | | | | | | | | | | | | | | |
| C4 | *C5 | C156 | *A3 | C358 | A2 | | | | | | | | | | | | | | | | | | |
| C5 | *C5 | C157 | *B3 | C359 | A2 | | | | | | | | | | | | | | | | | | |
| C6 | C1 | C158 | *B3 | C360 | *C4 | | | | | | | | | | | | | | | | | | |
| C7 | C5 | C159 | *A3 | C361 | A2 | | | | | | | | | | | | | | | | | | |
| C8 | C5 | C160 | B3 | C362 | *C4 | | | | | | | | | | | | | | | | | | |
| C9 | *B1 | C161 | B3 | C363 | *C3 | | | | | | | | | | | | | | | | | | |
| C10 | *C5 | C162 | A3 | C364 | *C4 | | | | | | | | | | | | | | | | | | |
| C11 | *C5 | C163 | B3 | C365 | B3 | | | | | | | | | | | | | | | | | | |
| C12 | B1 | C164 | B3 | C366 | A2 | | | | | | | | | | | | | | | | | | |
| C13 | *C1 | C165 | A3 | C367 | *C4 | | | | | | | | | | | | | | | | | | |
| C14 | *A1 | C166 | *B3 | C368 | B3 | | | | | | | | | | | | | | | | | | |
| C15 | B1 | C167 | *B3 | C369 | *C4 | | | | | | | | | | | | | | | | | | |
| C16 | *A1 | C168 | *A3 | C370 | A2 | | | | | | | | | | | | | | | | | | |
| C17 | *B4 | C169 | *B3 | C371 | A2 | | | | | | | | | | | | | | | | | | |
| C18 | *C4 | C170 | *B3 | C372 | A2 | | | | | | | | | | | | | | | | | | |
| C19 | B5 | C171 | *A3 | C373 | *B4 | | | | | | | | | | | | | | | | | | |
| C20 | *B1 | C172 | *B3 | C374 | *B4 | | | | | | | | | | | | | | | | | | |
| C21 | *B1 | C173 | *B3 | C375 | *B3 | | | | | | | | | | | | | | | | | | |
| C22 | B1 | C174 | *A3 | C376 | *B3 | | | | | | | | | | | | | | | | | | |
| C23 | A1 | C175 | *B3 | C377 | *B4 | | | | | | | | | | | | | | | | | | |
| C24 | *C5 | C176 | *B3 | C378 | *B4 | | | | | | | | | | | | | | | | | | |
| C25 | *A1 | C177 | *A3 | C379 | *C4 | | | | | | | | | | | | | | | | | | |
| C26 | A1 | C178 | *B3 | C380 | C4 | | | | | | | | | | | | | | | | | | |
| C27 | A1 | C179 | *B3 | C381 | *B5 | | | | | | | | | | | | | | | | | | |
| C28 | *A1 | C180 | *A3 | C382 | A4 | | | | | | | | | | | | | | | | | | |
| C29 | *B1 | C181 | *A3 | C383 | *B4 | | | | | | | | | | | | | | | | | | |
| C30 | A1 | C182 | *B3 | C384 | *B4 | | | | | | | | | | | | | | | | | | |
| C31 | B1 | C183 | *B3 | C385 | *C4 | | | | | | | | | | | | | | | | | | |
| C32 | *B5 | C184 | *B3 | C386 | *C4 | | | | | | | | | | | | | | | | | | |
| C33 | *B5 | C185 | *B3 | C387 | *A5 | | | | | | | | | | | | | | | | | | |
| C34 | B5 | C186 | *A3 | C388 | A3 | | | | | | | | | | | | | | | | | | |
| C35 | B5 | C187 | *A3 | C389 | *C4 | | | | | | | | | | | | | | | | | | |
| C36 | *A1 | C188 | *B3 | C390 | *B4 | | | | | | | | | | | | | | | | | | |
| C37 | B1 | C189 | *B3 | C391 | B4 | | | | | | | | | | | | | | | | | | |
| C38 | *C1 | C300 | *A5 | C392 | *B4 | | | | | | | | | | | | | | | | | | |
| C39 | *B1 | C301 | *A5 | C393 | *B4 | | | | | | | | | | | | | | | | | | |
| C40 | *C2 | C302 | *A5 | C394 | B4 | | | | | | | | | | | | | | | | | | |
| C41 | *C2 | C303 | *A5 | C395 | B4 | | | | | | | | | | | | | | | | | | |
| C100 | *A2 | C304 | *C2 | C396 | B4 | | | | | | | | | | | | | | | | | | |
| C103 | *A2 | C305 | A4 | C397 | *B4 | | | | | | | | | | | | | | | | | | |
| C104 | *A2 | C306 | A5 | C398 | *B4 | | | | | | | | | | | | | | | | | | |
| C105 | *A2 | C307 | *A5 | C399 | B4 | | | | | | | | | | | | | | | | | | |
| C106 | *A2 | C308 | *A4 | C400 | B4 | | | | | | | | | | | | | | | | | | |
| C107 | *A2 | C309 | *A5 | C401 | A5 | | | | | | | | | | | | | | | | | | |
| C108 | *C3 | C310 | *A4 | C402 | B5 | | | | | | | | | | | | | | | | | | |
| C109 | A2 | C311 | *A5 | C403 | B5 | | | | | | | | | | | | | | | | | | |
| C110 | A2 | C312 | *A4 | C404 | *B5 | | | | | | | | | | | | | | | | | | |
| C111 | A2 | C313 | *A4 | C405 | *B5 | | | | | | | | | | | | | | | | | | |
| C112 | A2 | C314 | *A4 | C406 | *B5 | | | | | | | | | | | | | | | | | | |
| C113 | A2 | C315 | *A4 | C407 | *B5 | | | | | | | | | | | | | | | | | | |
| C114 | A2 | C316 | *A4 | C408 | *B5 | | | | | | | | | | | | | | | | | | |
| C115 | *C1 | C317 | *A4 | C409 | B4 | | | | | | | | | | | | | | | | | | |
| C116 | *C1 | C318 | *A4 | C410 | *B4 | | | | | | | | | | | | | | | | | | |
| C117 | *C1 | C319 | *A4 | C411 | A4 | | | | | | | | | | | | | | | | | | |
| C118 | A2 | C320 | *A3 | C412 | *A4 | | | | | | | | | | | | | | | | | | |
| C119 | *C2 | C321 | *A4 | C413 | *B4 | | | | | | | | | | | | | | | | | | |
| C120 | *A3 | C322 | *A4 | C414 | B4 | | | | | | | | | | | | | | | | | | |
| C121 | A3 | C323 | A4 | C415 | *A4 | | | | | | | | | | | | | | | | | | |
| C122 | *A1 | C324 | A4 | C416 | A4 | | | | | | | | | | | | | | | | | | |
| C123 | *A1 | C325 | A3 | C417 | B4 | | | | | | | | | | | | | | | | | | |
| C124 | *B2 | C326 | *A4 | C418 | A4 | | | | | | | | | | | | | | | | | | |
| C125 | *B1 | C327 | *A4 | C419 | B4 | | | | | | | | | | | | | | | | | | |
| C126 | *B2 | C328 | *A4 | C420 | *B4 | | | | | | | | | | | | | | | | | | |
| C127 | *B2 | C329 | A4 | C421 | A4 | | | | | | | | | | | | | | | | | | |
| C128 | *B2 | C330 | A4 | C422 | *A4 | D3 | *C5 | IC107 | A3 | IC315 | *B4 | L106 | B3 | L313 | *A5 | L338 | *B4 | Q319 | B5 | R20 | *B5 | R120 | A2 | R145 | *C3 | R170 | *A3 | R195 | B3 |
| C129 | *B2 | C331 | *A4 | C423 | *B4 | | | IC108 | *C2 | IC316 | *C4 | L107 | B3 | L314 | A2 | L339 | *A4 | Q320 | A5 | R21 | *C2 | R121 | A2 | R146 | B2 | R171 | *B3 | R196 | A3 |
| C130 | *B2 | C332 | A4 | C424 | B4 | E1 | B1 | IC109 | A1 | IC317 | A4 | L108 | A3 | L315 | A2 | | | Q321 | B5 | R22 | *C2 | R122 | A2 | R147 | *B2 | R172 | *B3 | R197 | B3 |
| C131 | *B2 | C333 | *A4 | C425 | *A4 | | | IC110 | B2 | IC318 | B4 | L109 | B3 | L316 | *C4 | Q1 | *C1 | Q322 | B5 | R23 | A1 | R123 | A2 | R148 | *B2 | R173 | *A3 | R198 | A3 |
| C132 | *B2 | C334 | *A3 | C426 | A4 | FB1 | B1 | IC111 | *B3 | IC319 | B4 | L110 | B3 | L317 | *C4 | Q2 | *C5 | Q323 | B5 | R24 | A1 | R124 | *C2 | R149 | B2 | R174 | *B3 | R199 | B3 |
| C133 | *B2 | C335 | A3 | C427 | B4 | FB2 | B1 | IC112 | *B3 | IC320 | *B5 | L111 | A3 | L318 | *B3 | Q3 | *C5 | | | R25 | *C2 | R125 | *C2 | R150 | B2 | R175 | *B3 | R200 | B3 |
| C134 | *B2 | C336 | *A3 | C428 | A4 | FB100 | *C2 | IC113 | *A3 | IC321 | B4 | L112 | *B3 | L319 | *B4 | Q300 | A5 | R1 | *C5 | R26 | *C2 | R126 | *C2 | R151 | *B2 | R176 | *A3 | R201 | B3 |
| C135 | *B2 | C337 | *A3 | | | FB101 | *C2 | IC114 | B3 | IC322 | A4 | L113 | *A3 | L320 | B4 | Q301 | A5 | R2 | *C5 | R100 | *A2 | R127 | *C2 | R152 | *B2 | R177 | *B3 | R202 | A3 |
| C136 | *B2 | C338 | *C4 | CL1 | B1 | FB102 | *C2 | IC115 | A3 | IC323 | B4 | L114 | *B3 | L321 | *C4 | Q302 | A5 | R3 | B1 | R101 | *A2 | R128 | A2 | R153 | *B2 | R178 | *B3 | R203 | B3 |
| C137 | *B1 | C339 | *C4 | CL2 | B5 | | | IC116 | B3 | IC324 | A4 | L115 | *B3 | L322 | *A5 | Q303 | A4 | R4 | B1 | R102 | C1 | R129 | A2 | R154 | *B2 | R179 | *B3 | R204 | B3 |
| C138 | *B2 | C340 | *C4 | CL3 | B5 | FL100 | B3 | IC300 | C2 | IC325 | *A4 | L116 | *A3 | L323 | B4 | Q304 | B3 | R5 | *C1 | R103 | C1 | R130 | A2 | R155 | *B2 | R180 | *B3 | R205 | B3 |
| C139 | *B2 | C341 | C4 | CL4 | A1 | FL101 | B3 | IC301 | *A4 | IC326 | A4 | L117 | *B3 | L324 | C4 | Q305 | B3 | R6 | B1 | R106 | *A2 | R131 | A1 | R156 | *B2 | R181 | *B3 | R206 | A3 |
| C140 | *B2 | C342 | C4 | CL7 | C5 | FL102 | A3 | IC302 | *A3 | IC327 | A4 | L300 | *A5 | L325 | *B5 | Q306 | B3 | R7 | *C4 | R107 | *A2 | R132 | A1 | R157 | *B2 | R182 | *B3 | R207 | A3 |
| C141 | *B2 | C343 | *B4 | CL100 | C2 | FL300 | C4 | IC303 | A3 | | | L301 | *A5 | L326 | *B4 | Q307 | B3 | R8 | *C4 | R108 | *A2 | R133 | A2 | R158 | *B2 | R183 | *B3 | R208 | B3 |
| C142 | *B2 | C344 | *B4 | CL101 | *B2 | | | IC304 | A3 | L1 | B1 | L302 | *C2 | L327 | *B4 | Q308 | B4 | R9 | *B5 | R109 | *A2 | R134 | A2 | R159 | *B2 | R184 | *A3 | R209 | B3 |
| C143 | *B2 | C345 | A3 | CL102 | *B2 | IC1 | A1 | IC305 | *A3 | L2 | A1 | L303 | *A4 | L328 | *B4 | Q309 | B4 | R10 | *B1 | R110 | *A2 | R135 | *B2 | R160 | *B2 | R185 | *A3 | R210 | B3 |
| C144 | *B2 | C346 | *A2 | CL104 | B3 | IC2 | *B5 | IC306 | *C4 | L3 | B1 | L304 | *A5 | L329 | *B4 | Q310 | B4 | R11 | *B1 | R111 | *A2 | R136 | *A2 | R161 | *B2 | R186 | *A3 | R211 | B3 |
| C145 | B3 | C347 | A5 | CL105 | B3 | IC3 | *B1 | IC307 | *A3 | L4 | *B4 | L305 | *A5 | L330 | *A5 | Q311 | B4 | R12 | *B1 | R112 | *A2 | R137 | *C2 | R162 | *C4 | R187 | *B3 | R212 | B3 |
| C146 | B3 | C348 | *A5 | CL106 | A3 | IC4 | *C5 | IC308 | A3 | L5 | *B5 | L306 | *A4 | L331 | *B5 | Q312 | A5 | R13 | *B1 | R113 | *A2 | R138 | C1 | R163 | *B2 | R188 | *B3 | R213 | A3 |
| C147 | A3 | C349 | *A5 | | | IC100 | *A2 | IC309 | *A2 | L6 | *B5 | L307 | *A4 | L332 | *B4 | Q313 | B5 | R14 | *B1 | R114 | *A2 | R139 | C1 | R164 | *B2 | R189 | *A3 | R214 | A3 |
| C148 | B3 | C350 | A5 | CN100 | A2 | IC102 | *A2 | IC310 | A5 | L101 | *A1 | L308 | *A3 | L333 | *A4 | Q314 | A5 | R15 | *B5 | R115 | *A2 | R140 | B2 | R165 | *A2 | R190 | B3 | R215 | A3 |
| C149 | B3 | C351 | A4 | CN101 | C3 | IC103 | C3 | IC311 | *A2 | L102 | A2 | L309 | *C4 | L334 | *B4 | Q315 | B5 | R16 | A1 | R116 | B1 | R141 | B2 | R166 | *B3 | R191 | B3 | R216 | B3 |
| C150 | A3 | C352 | *A2 | | | IC104 | A2 | IC312 | *B3 | L103 | *A1 | L310 | B4 | L335 | *A4 | Q316 | B5 | R17 | A1 | R117 | *A2 | R142 | B2 | R167 | *B3 | R192 | B3 | R217 | B3 |
| C151 | B3 | C353 | *A2 | D1 | *C1 | IC105 | *C1 | IC313 | *B4 | L104 | *B1 | L311 | B4 | L336 | *B4 | Q317 | B5 | R18 | A1 | R118 | *A2 | R143 | B2 | R168 | *B3 | R193 | A3 | R218 | B3 |
| C152 | *B3 | C354 | *A2 | D2 | *C5 | IC106 | *A3 | IC314 | A2 | L105 | *B1 | L312 | *A4 | L337 | *A4 | Q318 | A5 | R19 | B5 | R119 | A2 | R144 | *B2 | R169 | *A3 | R194 | B3 | R219 | *B3 |

| | | | | | | | | | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| R220 | *A3 | R386 | *C3 | R478 | *B5 | | | | | | | | | | | | | | | | | | |
| R221 | *B3 | R387 | *C3 | R479 | *B5 | | | | | | | | | | | | | | | | | | |
| R222 | B3 | R388 | *C3 | R480 | *B5 | | | | | | | | | | | | | | | | | | |
| R223 | A3 | R389 | B3 | R481 | A4 | | | | | | | | | | | | | | | | | | |
| R224 | B3 | R390 | *C3 | R482 | B4 | | | | | | | | | | | | | | | | | | |
| R225 | A2 | R391 | *A2 | R483 | *C4 | | | | | | | | | | | | | | | | | | |
| R300 | C3 | R392 | B3 | R484 | B4 | | | | | | | | | | | | | | | | | | |
| R301 | A5 | R393 | *C3 | R485 | A4 | | | | | | | | | | | | | | | | | | |
| R302 | A5 | R394 | *C3 | R486 | B4 | | | | | | | | | | | | | | | | | | |
| R303 | C2 | R395 | B4 | R487 | A4 | | | | | | | | | | | | | | | | | | |
| R304 | A5 | R396 | *C3 | R488 | B4 | | | | | | | | | | | | | | | | | | |
| R305 | *C2 | R397 | *C3 | R489 | A4 | | | | | | | | | | | | | | | | | | |
| R306 | *C2 | R398 | *C4 | R490 | B4 | | | | | | | | | | | | | | | | | | |
| R307 | *C2 | R399 | *C3 | R491 | B4 | | | | | | | | | | | | | | | | | | |
| R308 | A5 | R400 | *C3 | R492 | A4 | | | | | | | | | | | | | | | | | | |
| R309 | A5 | R401 | *C3 | R493 | A4 | | | | | | | | | | | | | | | | | | |
| R310 | *C2 | R402 | B4 | R494 | B4 | | | | | | | | | | | | | | | | | | |
| R311 | *A5 | R403 | B3 | R495 | A4 | | | | | | | | | | | | | | | | | | |
| R312 | *A5 | R404 | A2 | R496 | B4 | | | | | | | | | | | | | | | | | | |
| R313 | A5 | R405 | A2 | R497 | A4 | | | | | | | | | | | | | | | | | | |
| R314 | A5 | R406 | B3 | R498 | B4 | | | | | | | | | | | | | | | | | | |
| R315 | A5 | R407 | A2 | R499 | A4 | | | | | | | | | | | | | | | | | | |
| R316 | *C2 | R408 | A2 | R500 | C4 | | | | | | | | | | | | | | | | | | |
| R317 | *A4 | R409 | B4 | R501 | B4 | | | | | | | | | | | | | | | | | | |
| R318 | *A4 | R410 | B4 | R502 | A4 | | | | | | | | | | | | | | | | | | |
| R319 | *A4 | R411 | B4 | R503 | B4 | | | | | | | | | | | | | | | | | | |
| R320 | *A4 | R412 | A2 | R504 | A4 | | | | | | | | | | | | | | | | | | |
| R321 | *A4 | R413 | B4 | R505 | B4 | | | | | | | | | | | | | | | | | | |
| R322 | *A4 | R414 | B4 | R506 | A4 | | | | | | | | | | | | | | | | | | |
| R323 | *A4 | R415 | *C4 | R507 | B4 | | | | | | | | | | | | | | | | | | |
| R324 | A4 | R416 | B4 | R508 | B4 | | | | | | | | | | | | | | | | | | |
| R325 | A4 | R417 | A3 | R509 | A4 | | | | | | | | | | | | | | | | | | |
| R326 | A4 | R418 | A3 | R510 | A4 | | | | | | | | | | | | | | | | | | |
| R327 | A4 | R419 | A3 | R511 | B4 | | | | | | | | | | | | | | | | | | |
| R328 | A4 | R420 | *C4 | R512 | A4 | | | | | | | | | | | | | | | | | | |
| R329 | A4 | R421 | *B4 | R513 | B4 | | | | | | | | | | | | | | | | | | |
| R330 | A4 | R422 | *B4 | R514 | A4 | | | | | | | | | | | | | | | | | | |
| R331 | *A4 | R423 | *C4 | R515 | C4 | | | | | | | | | | | | | | | | | | |
| R332 | A4 | R424 | A3 | R516 | *C4 | | | | | | | | | | | | | | | | | | |
| R333 | A4 | R425 | *B4 | R517 | *C4 | | | | | | | | | | | | | | | | | | |
| R334 | *A3 | R426 | *B4 | R518 | *C4 | | | | | | | | | | | | | | | | | | |
| R335 | *A3 | R427 | *B4 | R519 | *C4 | | | | | | | | | | | | | | | | | | |
| R336 | *A3 | R428 | *C4 | R520 | A2 | | | | | | | | | | | | | | | | | | |
| R337 | *A3 | R429 | *C4 | | | | | | | | | | | | | | | | | | | | |
| R338 | *C2 | R430 | *C4 | RB100 | C3 | | | | | | | | | | | | | | | | | | |
| R339 | *A4 | R431 | B4 | RB102 | *C1 | | | | | | | | | | | | | | | | | | |
| R340 | *A4 | R432 | *B4 | RB103 | *C2 | | | | | | | | | | | | | | | | | | |
| R341 | *A4 | R433 | *C4 | RB104 | C2 | | | | | | | | | | | | | | | | | | |
| R342 | *A4 | R434 | *B4 | RB105 | C2 | | | | | | | | | | | | | | | | | | |
| R343 | A4 | R435 | *C4 | RB106 | C2 | | | | | | | | | | | | | | | | | | |
| R344 | A4 | R436 | B4 | RB107 | C3 | | | | | | | | | | | | | | | | | | |
| R345 | *A4 | R437 | B4 | RB108 | C3 | | | | | | | | | | | | | | | | | | |
| R346 | *A4 | R438 | B4 | RB109 | *C3 | | | | | | | | | | | | | | | | | | |
| R347 | *A3 | R439 | B4 | RB110 | *C3 | | | | | | | | | | | | | | | | | | |
| R348 | *C4 | R440 | B4 | RB111 | *B2 | | | | | | | | | | | | | | | | | | |
| R349 | A4 | R441 | B4 | RB112 | *B2 | | | | | | | | | | | | | | | | | | |
| R350 | A3 | R442 | B4 | RB113 | *B2 | | | | | | | | | | | | | | | | | | |
| R351 | *C4 | R443 | *C4 | RB114 | *B2 | | | | | | | | | | | | | | | | | | |
| R352 | *A3 | R444 | *C4 | RB115 | *B2 | | | | | | | | | | | | | | | | | | |
| R353 | *C4 | R445 | *C3 | RB116 | *B2 | | | | | | | | | | | | | | | | | | |
| R354 | *C4 | R446 | B4 | RB117 | *A2 | | | | | | | | | | | | | | | | | | |
| R355 | *C4 | R447 | A4 | RB118 | *A2 | | | | | | | | | | | | | | | | | | |
| R356 | *C4 | R448 | B4 | RB119 | *A2 | | | | | | | | | | | | | | | | | | |
| R357 | *C4 | R449 | B4 | RB300 | *C2 | | | | | | | | | | | | | | | | | | |
| R358 | *C4 | R450 | B5 | RB301 | *B4 | | | | | | | | | | | | | | | | | | |
| R359 | *C4 | R451 | B4 | RB302 | *B4 | | | | | | | | | | | | | | | | | | |
| R360 | A3 | R452 | B5 | RB303 | *B3 | | | | | | | | | | | | | | | | | | |
| R361 | *A3 | R453 | B4 | | | | | | | | | | | | | | | | | | | | |
| R362 | *A3 | R454 | B4 | THP1 | *C5 | | | | | | | | | | | | | | | | | | |
| R363 | *A3 | R455 | A5 | THP2 | C5 | | | | | | | | | | | | | | | | | | |
| R364 | A3 | R456 | B4 | THP3 | B1 | | | | | | | | | | | | | | | | | | |
| R365 | A3 | R457 | B4 | THP4 | C1 | | | | | | | | | | | | | | | | | | |
| R366 | *A2 | R458 | B5 | | | | | | | | | | | | | | | | | | | | |
| R367 | *A2 | R459 | A5 | TP100 | B1 | | | | | | | | | | | | | | | | | | |
| R368 | A5 | R460 | B5 | TP300 | C2 | | | | | | | | | | | | | | | | | | |
| R369 | A4 | R461 | B5 | TP301 | A4 | | | | | | | | | | | | | | | | | | |
| R370 | A4 | R462 | C4 | | | | | | | | | | | | | | | | | | | | |
| R371 | A4 | R463 | C4 | *:B SIDE | | | | | | | | | | | | | | | | | | | |
| R372 | A4 | R464 | C4 | | | | | | | | | | | | | | | | | | | | |
| R373 | *A2 | R465 | A5 | | | | | | | | | | | | | | | | | | | | |
| R374 | *A2 | R466 | B5 | | | | | | | | | | | | | | | | | | | | |
| R375 | *A2 | R467 | B5 | | | | | | | | | | | | | | | | | | | | |
| R376 | *A2 | R468 | A5 | | | | | | | | | | | | | | | | | | | | |
| R377 | *A2 | R469 | B5 | | | | | | | | | | | | | | | | | | | | |
| R378 | *A2 | R470 | B5 | | | | | | | | | | | | | | | | | | | | |
| R379 | *A2 | R471 | B5 | | | | | | | | | | | | | | | | | | | | |
| R380 | *A2 | R472 | B5 | | | | | | | | | | | | | | | | | | | | |
| R381 | A5 | R473 | *B5 | | | | | | | | | | | | | | | | | | | | |
| R382 | A4 | R474 | *B5 | | | | | | | | | | | | | | | | | | | | |
| R383 | *A2 | R475 | *B5 | | | | | | | | | | | | | | | | | | | | |
| R384 | *A2 | R476 | *B5 | | | | | | | | | | | | | | | | | | | | |
| R385 | *A2 | R477 | *B5 | | | | | | | | | | | | | | | | | | | | |


VDA-63
1-865-931-12
SONY
MADE IN JAPAN
0.5A/13.2V
THP4
THP1
THP2
TP100
74M
TP300
27M
IC110
IC103
IC300
IC309
IC304
IC305
IC306
IC307
IC308
IC310
IC311
IC312
IC313
IC314
IC315
IC316
IC317
IC318
IC319
IC320
IC321
IC322
IC323
IC324
IC325
IC326
IC327
IC100
IC101
IC102
IC104
IC105
IC106
IC107
IC108
IC109
IC111
IC112
IC113
IC114
IC115
IC116
IC117
IC118
IC119
IC120
IC121
IC122
IC123
IC124
IC125
IC126
IC127
IC128
IC129
IC130
IC131
IC132
IC133
IC134
IC135
IC136
IC137
IC138
IC139
IC140
IC141
IC142
IC143
IC144
IC145
IC146
IC147
IC148
IC149
IC150
IC151
IC152
IC153
IC154
IC155
IC156
IC157
IC158
IC159
IC160
IC161
IC162
IC163
IC164
IC165
IC166
IC167
IC168
IC169
IC170
IC171
IC172
IC173
IC174
IC175
IC176
IC177
IC178
IC179
IC180
IC181
IC182
IC183
IC184
IC185
IC186
IC187
IC188
IC189
IC190
IC191
IC192
IC193
IC194
IC195
IC196
IC197
IC198
IC199
IC200
IC201
IC202
IC203
IC204
IC205
IC206
IC207
IC208
IC209
IC210
IC211
IC212
IC213
IC214
IC215
IC216
IC217
IC218
IC219
IC220
IC221
IC222
IC223
IC224
IC225
IC226
IC227
IC228
IC229
IC230
IC231
IC232
IC233
IC234
IC235
IC236
IC237
IC238
IC239
IC240
IC241
IC242
IC243
IC244
IC245
IC246
IC247
IC248
IC249
IC250
IC251
IC252
IC253
IC254
IC255
IC256
IC257
IC258
IC259
IC260
IC261
IC262
IC263
IC264
IC265
IC266
IC267
IC268
IC269
IC270
IC271
IC272
IC273
IC274
IC275
IC276
IC277
IC278
IC279
IC280
IC281
IC282
IC283
IC284
IC285
IC286
IC287
IC288
IC289
IC290
IC291
IC292
IC293
IC294
IC295
IC296
IC297
IC298
IC299
IC300
IC301
IC302
IC303
IC304
IC305
IC306
IC307
IC308
IC309
IC310
IC311
IC312
IC313
IC314
IC315
IC316
IC317
IC318
IC319
IC320
IC321
IC322
IC323
IC324
IC325
IC326
IC327
IC328
IC329
IC330
IC331
IC332
IC333
IC334
IC335
IC336
IC337
IC338
IC339
IC340
IC341
IC342
IC343
IC344
IC345
IC346
IC347
IC348
IC349
IC350
IC351
IC352
IC353
IC354
IC355
IC356
IC357
IC358
IC359
IC360
IC361
IC362
IC363
IC364
IC365
IC366
IC367
IC368
IC369
IC370
IC371
IC372
IC373
IC374
IC375
IC376
IC377
IC378
IC379
IC380
IC381
IC382
IC383
IC384
IC385
IC386
IC387
IC388
IC389
IC390
IC391
IC392
IC393
IC394
IC395
IC396
IC397
IC398
IC399
IC400
IC401
IC402
IC403
IC404
IC405
IC406
IC407
IC408
IC409
IC410
IC411
IC412
IC413
IC414
IC415
IC416
IC417
IC418
IC419
IC420
IC421
IC422
IC423
IC424
IC425
IC426
IC427
IC428
IC429
IC430
IC431
IC432
IC433
IC434
IC435
IC436
IC437
IC438
IC439
IC440
IC441
IC442
IC443
IC444
IC445
IC446
IC447
IC448
IC449
IC450
IC451
IC452
IC453
IC454
IC455
IC456
IC457
IC458
IC459
IC460
IC461
IC462
IC463
IC464
IC465
IC466
IC467
IC468
IC469
IC470
IC471
IC472
IC473
IC474
IC475
IC476
IC477
IC478
IC479
IC480
IC481
IC482
IC483
IC484
IC485
IC486
IC487
IC488
IC489
IC490
IC491
IC492
IC493
IC494
IC495
IC496
IC497
IC498
IC499
IC500
IC501
IC502
IC503
IC504
IC505
IC506
IC507
IC508
IC509
IC510
IC511
IC512
IC513
IC514
IC515
IC516
IC517
IC518
IC519
IC520
IC521
IC522
IC523
IC524
IC525
IC526
IC527
IC528
IC529
IC530
IC531
IC532
IC533
IC534
IC535
IC536
IC537
IC538
IC539
IC540
IC541
IC542
IC543
IC544
IC545
IC546
IC547
IC548
IC549
IC550
IC551
IC552
IC553
IC554
IC555
IC556
IC557
IC558
IC559
IC560
IC561
IC562
IC563
IC564
IC565
IC566
IC567
IC568
IC569
IC570
IC571
IC572
IC573
IC574
IC575
IC576
IC577
IC578
IC579
IC580
IC581
IC582
IC583
IC584
IC585
IC586
IC587
IC588
IC589
IC590
IC591
IC592
IC593
IC594
IC595
IC596
IC597
IC598
IC599
IC600
IC601
IC602
IC603
IC604
IC605
IC606
IC607
IC608
IC609
IC610
IC611
IC612
IC613
IC614
IC615
IC616
IC617
IC618
IC619
IC620
IC621
IC622
IC623
IC624
IC625
IC626
IC627
IC628
IC629
IC630
IC631
IC632
IC633
IC634
IC635
IC636
IC637
IC638
IC639
IC640
IC641
IC642
IC643
IC644
IC645
IC646
IC647
IC648
IC649
IC650
IC651
IC652
IC653
IC654
IC655
IC656
IC657
IC658
IC659
IC660
IC661
IC662
IC663
IC664
IC665
IC666
IC667
IC668
IC669
IC670
IC671
IC672
IC673
IC674
IC675
IC676
IC677
IC678
IC679
IC680
IC681
IC682
IC683
IC684
IC685
IC686
IC687
IC688
IC689
IC690
IC691
IC692
IC693
IC694
IC695
IC696
IC697
IC698
IC699
IC700
IC701
IC702
IC703
IC704
IC705
IC706
IC707
IC708
IC709
IC710
IC711
IC712
IC713
IC714
IC715
IC716
IC717
IC718
IC719
IC720
IC721
IC722
IC723
IC724
IC725
IC726
IC727
IC728
IC729
IC730
IC731
IC732
IC733
IC734
IC735
IC736
IC737
IC738
IC739
IC740
IC741
IC742
IC743
IC744
IC745
IC746
IC747
IC748
IC749
IC750
IC751
IC752
IC753
IC754
IC755
IC756
IC757
IC758
IC759
IC760
IC761
IC762
IC763
IC764
IC765
IC766
IC767
IC768
IC769
IC770
IC771
IC772
IC773
IC774
IC775
IC776
IC777
IC778
IC779
IC780
IC781
IC782
IC783
IC784
IC785
IC786
IC787
IC788
IC789
IC790
IC791
IC792
IC793
IC794
IC795
IC796
IC797
IC798
IC799
IC800
IC801
IC802
IC803
IC804
IC805
IC806
IC807
IC808
IC809
IC810
IC811
IC812
IC813
IC814
IC815
IC816
IC817
IC818
IC819
IC820
IC821
IC822
IC823
IC824
IC825
IC826
IC827
IC828
IC829
IC830
IC831
IC832
IC833
IC834
IC835
IC836
IC837
IC838
IC839
IC840
IC841
IC842
IC843
IC844
IC845
IC846
IC847
IC848
IC849
IC850
IC851
IC852
IC853
IC854
IC855
IC856
IC857
IC858
IC859
IC860
IC861
IC862
IC863
IC864
IC865
IC866
IC867
IC868
IC869
IC870
IC871
IC872
IC873
IC874
IC875
IC876
IC877
IC878
IC879
IC880
IC881
IC882
IC883
IC884
IC885
IC886
IC887
IC888
IC889
IC890
IC891
IC892
IC893
IC894
IC895
IC896
IC897
IC898
IC899
IC900
IC901
IC902
IC903
IC904
IC905
IC906
IC907
IC908
IC909
IC910
IC911
IC912
IC913
IC914
IC915
IC916
IC917
IC918
IC919
IC920
IC921
IC922
IC923
IC924
IC925
IC926
IC927
IC928
IC929
IC930
IC931
IC932
IC933
IC934
IC935
IC936
IC937
IC938
IC939
IC940
IC941
IC942
IC943
IC944
IC945
IC946
IC947
IC948
IC949
IC950
IC951
IC952
IC953
IC954
IC955
IC956
IC957
IC958
IC959
IC960
IC961
IC962
IC963
IC964
IC965
IC966
IC967
IC968
IC969
IC970
IC971
IC972
IC973
IC974
IC975
IC976
IC977
IC978
IC979
IC980
IC981
IC982
IC983
IC984
IC985
IC986
IC987
IC988
IC989
IC990
IC991
IC992
IC993
IC994
IC995
IC996
IC997
IC998
IC999
IC1000
IC1001
IC1002
IC1003
IC1004
IC1005
IC1006
IC1007
IC1008
IC1009
IC1010
IC1011
IC1012
IC1013
IC1014
IC1015
IC1016
IC1017
IC1018
IC1019
IC1020
IC1021
IC1022
IC1023
IC1024
IC1025
IC1026
IC1027
IC1028
IC1029
IC1030
IC1031
IC1032
IC1033
IC1034
IC1035
IC1036
IC1037
IC1038
IC1039
IC1040
IC1041
IC1042
IC1043
IC1044
IC1045
IC1046
IC1047
IC1048
IC1049
IC1050
IC1051
IC1052
IC1053
IC1054
IC1055
IC1056
IC1057
IC1058
IC1059
IC1060
IC1061
IC1062
IC1063
IC1064
IC1065
IC1066
IC1067
IC1068
IC1069
IC1070
IC1071
IC1072
IC1073
IC1074
IC1075
IC1076
IC1077
IC1078
IC1079
IC1080
IC1081
IC1082
IC1083
IC1084
IC1085
IC1086
IC1087
IC1088
IC1089
IC1090
IC1091
IC1092
IC1093
IC1094
IC1095
IC1096
IC1097
IC1098
IC1099
IC1100
IC1101
IC1102
IC1103
IC1104
IC1105
IC1106
IC1107
IC1108
IC1109
IC1110
IC1111
IC1112
IC1113
IC1114
IC1115
IC1116
IC1117
IC1118
IC1119
IC1120
IC1121
IC1122
IC1123
IC1124
IC1125
IC1126
IC1127
IC1128
IC1129
IC1130
IC1131
IC1132
IC1133
IC1134
IC1135
IC1136
IC1137
IC1138
IC1139
IC1140
IC1141
IC1142
IC1143
IC1144
IC1145
IC1146
IC1147
IC1148
IC1149
IC1150
IC1151
IC1152
IC1153
IC1154
IC1155
IC1156
IC1157
IC1158
IC1159
IC1160
IC1161
IC1162
IC1163
IC1164
IC1165
IC1166
IC1167
IC1168
IC1169
IC1170
IC1171
IC1172
IC1173
IC1174
IC1175
IC1176
IC1177
IC1178
IC1179
IC1180
IC1181
IC1182
IC1183
IC1184
IC1185
IC1186
IC1187
IC1188
IC1189
IC1190
IC1191
IC1192
IC1193
IC1194
IC1195
IC1196
IC1197
IC1198
IC1199
IC1200
IC1201
IC1202
IC1203
IC1204
IC1205
IC1206
IC1207
IC1208
IC1209
IC1210
IC1211
IC1212
IC1213
IC1214
IC1215
IC1216
IC1217
IC1218
IC1219
IC1220
IC1221
IC1222
IC1223
IC1224
IC1225
IC1226
IC1227
IC1228
IC1229
IC1230
IC1231
IC1232
IC1233
IC1234
IC1235
IC1236
IC1237
IC1238
IC1239
IC1240
IC1241
IC1242
IC1243
IC1244
IC1245
IC1246
IC1247
IC1248
IC1249
IC1250
IC1251
IC1252
IC1253
IC1254
IC1255
IC1256
IC1257
IC1258
IC1259
IC1260
IC1261
IC1262
IC1263
IC1264
IC1265
IC1266
IC1267
IC1268
IC1269
IC1270
IC1271
IC1272
IC1273
IC1274
IC1275
IC1276
IC1277
IC1278
IC1279
IC1280
IC1281
IC1282
IC1283
IC1284
IC1285
IC1286
IC1287
IC1288
IC1289
IC1290
IC1291
IC1292
IC1293
IC1294
IC1295
IC1296
IC1297
IC1298
IC1299
IC1300
IC1301
IC1

VDA-63 (1-865-931-13,31)

| | | | | | |
|---|---|---|---|---|---|
| C1 | *C4 | C153 | A3 | C355 | A2 |
| C2 | C1 | C154 | *B3 | C356 | *A2 |
| C3 | *C1 | C155 | A3 | C357 | *C3 |
| C4 | *C5 | C156 | *A3 | C358 | A2 |
| C5 | *C5 | C157 | *B3 | C359 | A2 |
| C6 | C1 | C158 | *B3 | C360 | *C4 |
| C7 | C5 | C159 | *A3 | C361 | A2 |
| C8 | C5 | C160 | B3 | C362 | *C4 |
| C9 | *B1 | C161 | B3 | C363 | *C3 |
| C10 | *C5 | C162 | A3 | C364 | *C4 |
| C11 | *C5 | C163 | B3 | C365 | B3 |
| C12 | B1 | C164 | B3 | C366 | A2 |
| C13 | *C1 | C165 | A3 | C367 | *C4 |
| C14 | *A1 | C166 | *B3 | C368 | B3 |
| C15 | B1 | C167 | *B3 | C369 | *C4 |
| C16 | *A1 | C168 | *A3 | C370 | A2 |
| C17 | *B4 | C169 | *B3 | C371 | A2 |
| C18 | *C4 | C170 | *B3 | C372 | A2 |
| C19 | B5 | C171 | *A3 | C373 | *B4 |
| C20 | *B1 | C172 | *B3 | C374 | *B4 |
| C21 | *B1 | C173 | *B3 | C375 | *B3 |
| C22 | B1 | C174 | *A3 | C376 | *B3 |
| C23 | A1 | C175 | *B3 | C377 | *B4 |
| C24 | *C5 | C176 | *B3 | C378 | *B4 |
| C25 | *A1 | C177 | *A3 | C379 | *C4 |
| C26 | A1 | C178 | *B3 | C380 | C4 |
| C27 | A1 | C179 | *B3 | C381 | *B5 |
| C28 | *A1 | C180 | *A3 | C382 | A4 |
| C29 | *B1 | C181 | *A3 | C383 | *B4 |
| C30 | A1 | C182 | *B3 | C384 | *B4 |
| C31 | B1 | C183 | *B3 | C385 | *C4 |
| C32 | *B5 | C184 | *B3 | C386 | *C4 |
| C33 | *B5 | C185 | *B3 | C387 | *A5 |
| C34 | B5 | C186 | *A3 | C388 | A3 |
| C35 | B5 | C187 | *A3 | C389 | *C4 |
| C36 | *A1 | C188 | *B3 | C390 | *B4 |
| C37 | B1 | C189 | *B3 | C391 | B4 |
| C38 | *C1 | C300 | *A5 | C392 | *B4 |
| C39 | *B1 | C301 | *A5 | C393 | *B4 |
| C40 | *C2 | C302 | *A5 | C394 | B4 |
| C41 | *C2 | C303 | *A5 | C395 | B4 |
| C100 | *A2 | C304 | *C2 | C396 | B4 |
| C103 | *A2 | C305 | A4 | C397 | *B4 |
| C104 | *A2 | C306 | A5 | C398 | *B4 |
| C105 | *A2 | C307 | *A5 | C399 | B4 |
| C106 | *A2 | C308 | *A4 | C400 | B4 |
| C107 | *A2 | C309 | *A5 | C401 | A5 |
| C108 | *C3 | C310 | *A4 | C402 | B5 |
| C109 | A2 | C311 | *A5 | C403 | B5 |
| C110 | A2 | C312 | *A4 | C404 | *B5 |
| C111 | A2 | C313 | *A4 | C405 | *B5 |
| C112 | A2 | C314 | *A4 | C406 | *B5 |
| C113 | A2 | C315 | *A4 | C407 | *B5 |
| C114 | A2 | C316 | *A4 | C408 | *B5 |
| C115 | *C1 | C317 | *A4 | C409 | B4 |
| C116 | *C1 | C318 | *A4 | C410 | *B4 |
| C117 | *C1 | C319 | *A4 | C411 | A4 |
| C118 | A2 | C320 | *A3 | C412 | *A4 |
| C119 | *C2 | C321 | *A4 | C413 | *B4 |
| C120 | *A3 | C322 | *A4 | C414 | B4 |
| C121 | A3 | C323 | A4 | C415 | *A4 |
| C122 | *A1 | C324 | A4 | C416 | A4 |
| C123 | *A1 | C325 | A3 | C417 | B4 |
| C124 | *B2 | C326 | *A4 | C418 | A4 |
| C125 | *B1 | C327 | *A4 | C419 | B4 |
| C126 | *B2 | C328 | *A4 | C420 | *B4 |
| C127 | *B2 | C329 | A4 | C421 | A4 |
| C128 | *B2 | C330 | A4 | C422 | *A4 |
| C129 | *B2 | C331 | *A4 | C423 | *B4 |
| C130 | *B2 | C332 | A4 | C424 | B4 |
| C131 | *B2 | C333 | *A4 | C425 | *A4 |
| C132 | *B2 | C334 | *A3 | C426 | A4 |
| C133 | *B2 | C335 | A3 | C427 | B4 |
| C134 | *B2 | C336 | *A3 | C428 | A4 |
| C135 | *B2 | C337 | *A3 | | |
| C136 | *B2 | C338 | *C4 | CL1 | B1 |
| C137 | *B1 | C339 | *C4 | CL2 | B5 |
| C138 | *B2 | C340 | *C4 | CL3 | B5 |
| C139 | *B2 | C341 | C4 | CL4 | A1 |
| C140 | *B2 | C342 | B4 | CL7 | C5 |
| C141 | *B2 | C343 | *B4 | CL100 | B2 |
| C142 | *B2 | C344 | *B4 | CL101 | *B2 |
| C143 | *B2 | C345 | A3 | CL102 | *B2 |
| C144 | *B2 | C346 | *A2 | CL104 | B3 |
| C145 | B3 | C347 | A5 | CL105 | B3 |
| C146 | B3 | C348 | *A5 | CL106 | A3 |
| C147 | A3 | C349 | *A4 | | |
| C148 | B3 | C350 | A5 | CN100 | A2 |
| C149 | B3 | C351 | A4 | CN101 | C3 |
| C150 | A3 | C352 | *A2 | | |
| C151 | B3 | C353 | *A2 | D1 | *C1 |
| C152 | *B3 | C354 | *A2 | D2 | *C5 |




**VDA-63** -A SIDE-
SUFFIX: -13, 31

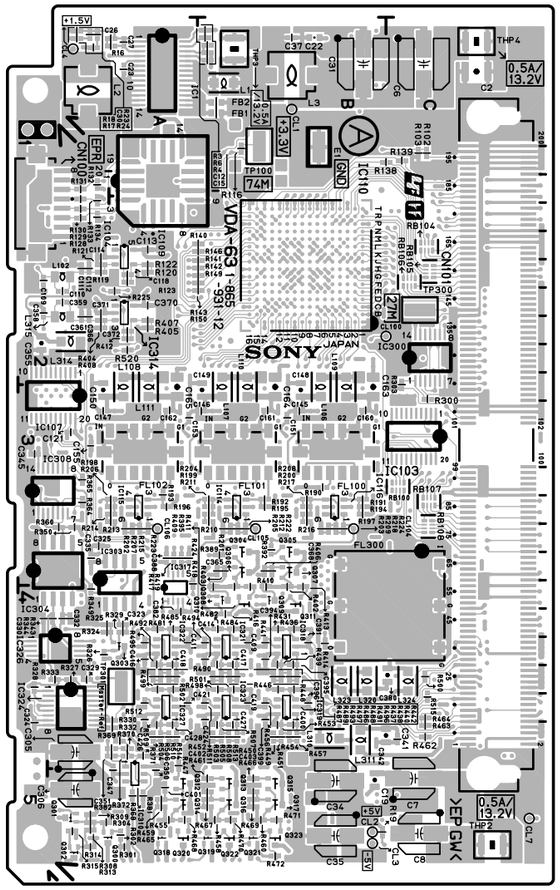


**VDA-63** -B SIDE-
SUFFIX: -13, 31

| | | | | | | | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| D3 | *C5 | IC105 | *C1 | IC313 | *B4 | L104 | *B1 | L311 | B4 | L336 | *B4 | Q317 | B5 | R18 | A1 | R118 | *A2 | R143 | B2 | R168 | *B3 | R193 | A3 |
| | | IC106 | *A3 | IC314 | A2 | L105 | *B1 | L312 | *A4 | L337 | *A4 | Q318 | A5 | R19 | B5 | R119 | A2 | R144 | *B2 | R169 | *A3 | R194 | B3 |
| E1 | B1 | IC107 | A3 | IC315 | *B4 | L106 | B3 | L313 | *A5 | L338 | *B4 | Q319 | B5 | R20 | *B5 | R120 | A2 | R145 | *C3 | R170 | *A3 | R195 | B3 |
| | | IC108 | *C2 | IC316 | *C4 | L107 | B3 | L314 | A2 | L339 | *A4 | Q320 | A5 | R21 | *C2 | R121 | A2 | R146 | B2 | R171 | *B3 | R196 | A3 |
| FB1 | B1 | IC109 | A1 | IC317 | A4 | L108 | A3 | L315 | A2 | | | Q321 | B5 | R22 | *C2 | R122 | A2 | R147 | *B2 | R172 | *B3 | R197 | B3 |
| FB2 | B1 | IC110 | B2 | IC318 | B4 | L109 | B3 | L316 | *C4 | Q1 | *C1 | Q322 | B5 | R23 | A1 | R123 | A2 | R148 | *B2 | R173 | *A3 | R200 | B3 |
| FB100 | *C2 | IC111 | *B3 | IC319 | B4 | L110 | B3 | L317 | *C4 | Q2 | *C5 | Q323 | B5 | R24 | A1 | R124 | *C2 | R149 | B2 | R174 | *B3 | R201 | B3 |
| FB101 | *C2 | IC112 | *B3 | IC320 | *B5 | L111 | A3 | L318 | *B3 | Q3 | *C5 | | | R25 | *C2 | R125 | *C2 | R150 | B2 | R175 | *B3 | R202 | A3 |
| FB102 | *C2 | IC113 | *A3 | IC321 | B4 | L112 | *B3 | L319 | *B4 | Q300 | A5 | R1 | *C5 | R26 | *C2 | R126 | *C2 | R151 | *B2 | R176 | *A3 | R203 | B3 |
| | | IC114 | B3 | IC322 | A4 | L113 | *A3 | L320 | B4 | Q301 | A5 | R2 | *C5 | R100 | *A2 | R127 | *C2 | R152 | *B2 | R177 | *B3 | R205 | B3 |
| | | IC115 | A3 | IC323 | B4 | L114 | *B3 | L321 | *C4 | Q302 | A5 | R3 | B1 | R101 | *A2 | R128 | A2 | R153 | *B2 | R178 | *B3 | R207 | A3 |
| FL100 | B3 | IC116 | B3 | IC324 | A4 | L115 | *B3 | L322 | *A5 | Q303 | A4 | R4 | B1 | R102 | C1 | R129 | A2 | R154 | *B2 | R179 | *B3 | R208 | B3 |
| FL101 | B3 | IC117 | *B3 | IC325 | *A4 | L116 | *A3 | L323 | B4 | Q304 | B3 | R5 | *C1 | R103 | C1 | R130 | A2 | R155 | *B2 | R180 | *B3 | R209 | B3 |
| FL102 | A3 | IC118 | B4 | IC326 | A4 | L117 | *B3 | L324 | C4 | Q305 | B3 | R6 | B1 | R106 | *A2 | R131 | A1 | R156 | *B2 | R181 | *B3 | R210 | B3 |
| FL300 | C4 | IC119 | B4 | IC327 | A4 | L300 | *A5 | L325 | *B5 | Q306 | B3 | R7 | *C4 | R107 | *A2 | R132 | A1 | R157 | *B2 | R182 | *B3 | R211 | B3 |
| | | IC120 | B2 | | | L301 | *A5 | L326 | *B4 | Q307 | B3 | R8 | *C4 | R108 | *A2 | R133 | A2 | R158 | *B2 | R183 | *B3 | R212 | B3 |
| HB001 | *A4 | IC303 | A3 | | | L302 | *C2 | L327 | *B4 | Q308 | B4 | R9 | *B5 | R109 | *A2 | R134 | A2 | R159 | *B2 | R184 | *A3 | R213 | A3 |
| | | IC304 | A3 | L1 | B1 | L303 | *A4 | L328 | *B4 | Q309 | B4 | R10 | *B1 | R110 | *A2 | R135 | *B2 | R160 | *B2 | R185 | *A3 | R214 | A3 |
| IC1 | A1 | IC305 | *A3 | L2 | A1 | L304 | *A5 | L329 | *B4 | Q310 | B4 | R11 | *B1 | R111 | *A2 | R136 | *A2 | R161 | *B2 | R186 | *A3 | R215 | A3 |
| IC2 | *B5 | IC306 | *C4 | L3 | B1 | L305 | *A5 | L330 | *A5 | Q311 | B4 | R12 | *B1 | R112 | *A2 | R137 | *C2 | R162 | *C4 | R187 | *B3 | R216 | B3 |
| IC3 | *B1 | IC307 | *A3 | L4 | *B4 | L306 | *A4 | L331 | *B5 | Q312 | A5 | R13 | *B1 | R113 | *A2 | R138 | B1 | R163 | *B2 | R188 | *B3 | R217 | B3 |
| IC4 | *C5 | IC308 | A3 | L5 | *B5 | L307 | *A4 | L332 | *B4 | Q313 | B5 | R14 | *B1 | R114 | *A2 | R139 | C1 | R164 | *B2 | R189 | *A3 | R218 | B3 |
| IC100 | *A2 | IC309 | *A2 | L6 | *B5 | L308 | *A3 | L333 | *A4 | Q314 | A5 | R15 | *B5 | R115 | *A2 | R140 | B2 | R165 | *A2 | R190 | B3 | R219 | *B3 |
| IC102 | *A2 | IC310 | A5 | L101 | *A1 | L309 | *C4 | L334 | *B4 | Q315 | B5 | R16 | A1 | R116 | B1 | R141 | B2 | R166 | *B3 | R191 | B3 | R220 | *A3 |
| IC103 | C3 | IC311 | *A2 | L102 | A2 | L310 | B4 | L335 | *A4 | Q316 | B5 | R17 | A1 | R117 | *A2 | R142 | B2 | R167 | *B3 | R192 | B3 | R221 | *B3 |
| IC104 | A2 | IC312 | *B3 | L103 | *A1 | | | | | | | | | | | | | | | | | | |
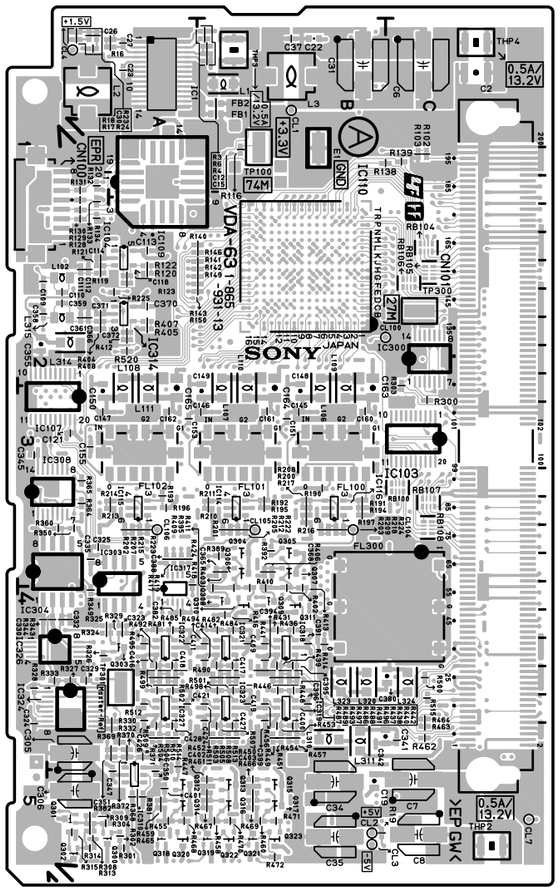
| | | | | | |
|---|---|---|---|---|---|
| R222 | B3 | R389 | B3 | R481 | A4 |
| R223 | A3 | R390 | *C3 | R482 | B4 |
| R224 | B3 | R391 | *A2 | R483 | *C4 |
| R225 | A2 | R392 | B3 | R484 | B4 |
| R300 | C3 | R393 | *C3 | R485 | A4 |
| R301 | A5 | R394 | *C3 | R486 | B4 |
| R302 | A5 | R395 | B4 | R487 | A4 |
| R303 | C2 | R396 | *C3 | R488 | B4 |
| R304 | A5 | R397 | *C3 | R489 | A4 |
| R306 | *C2 | R398 | *C4 | R490 | B4 |
| R307 | *C2 | R399 | *C3 | R491 | B4 |
| R308 | A5 | R400 | *C3 | R492 | A4 |
| R309 | A5 | R401 | *C3 | R493 | A4 |
| R310 | *C2 | R402 | B4 | R494 | B4 |
| R311 | *A5 | R403 | B3 | R495 | A4 |
| R312 | *A5 | R404 | A2 | R496 | B4 |
| R313 | A5 | R405 | A2 | R497 | A4 |
| R314 | A5 | R406 | B3 | R498 | B4 |
| R315 | A5 | R407 | A2 | R499 | A4 |
| R316 | *C2 | R408 | A2 | R500 | C4 |
| R317 | *A4 | R409 | B4 | R501 | B4 |
| R318 | *A4 | R410 | B4 | R502 | A4 |
| R319 | *A4 | R411 | B4 | R503 | B4 |
| R320 | *A4 | R412 | A2 | R504 | A4 |
| R321 | *A4 | R413 | B4 | R505 | B4 |
| R322 | *A4 | R414 | B4 | R506 | A4 |
| R323 | *A4 | R415 | *C4 | R507 | B4 |
| R324 | A4 | R416 | B4 | R508 | B4 |
| R325 | A4 | R417 | A3 | R509 | A4 |
| R326 | A4 | R418 | A3 | R510 | A4 |
| R327 | A4 | R419 | A3 | R511 | B4 |
| R328 | A4 | R420 | *C4 | R512 | A4 |
| R329 | A4 | R421 | *B4 | R513 | B4 |
| R330 | A4 | R422 | *B4 | R514 | A4 |
| R331 | *A4 | R423 | *C4 | R515 | C4 |
| R332 | A4 | R424 | A3 | R516 | *C4 |
| R333 | A4 | R425 | *B4 | R517 | *C4 |
| R334 | *A3 | R426 | *B4 | R518 | *C4 |
| R335 | *A3 | R427 | *B4 | R519 | *C4 |
| R336 | *A3 | R428 | *C4 | R520 | A2 |
| R337 | *A3 | R429 | *C4 | | |
| R338 | *C2 | R430 | *C4 | RB100 | C3 |
| R339 | *A4 | R431 | B4 | RB102 | *C1 |
| R340 | *A4 | R432 | *B4 | RB103 | *C2 |
| R341 | *A4 | R433 | *C4 | RB104 | C2 |
| R342 | *A4 | R434 | *B4 | RB105 | C2 |
| R343 | A4 | R435 | *C4 | RB106 | C2 |
| R344 | A4 | R436 | B4 | RB107 | C3 |
| R345 | *A4 | R437 | B4 | RB108 | C3 |
| R346 | *A4 | R438 | B4 | RB109 | *C3 |
| R347 | *A3 | R439 | B4 | RB110 | *C3 |
| R348 | *C4 | R440 | B4 | RB111 | *B2 |
| R349 | A4 | R441 | B4 | RB112 | *B2 |
| R350 | A3 | R442 | B4 | RB113 | *B2 |
| R351 | *C4 | R443 | *C4 | RB114 | *B2 |
| R352 | *A3 | R444 | *C4 | RB115 | *B2 |
| R353 | *C4 | R445 | *C3 | RB116 | *B2 |
| R354 | *C4 | R446 | B4 | RB117 | *A2 |
| R355 | *C4 | R447 | A4 | RB118 | *A2 |
| R356 | *C4 | R448 | B4 | RB119 | *A2 |
| R357 | *C4 | R449 | B4 | RB300 | *C2 |
| R358 | *C4 | R450 | B5 | RB301 | *B4 |
| R359 | *C4 | R451 | B4 | RB302 | *B4 |
| R360 | A3 | R452 | B5 | RB303 | *B3 |
| R361 | *A3 | R453 | B4 | | |
| R362 | *A3 | R454 | B4 | THP1 | *C5 |
| R363 | *A3 | R455 | A5 | THP2 | C5 |
| R364 | A3 | R456 | B4 | THP3 | B1 |
| R365 | A3 | R457 | B4 | THP4 | C1 |
| R366 | *A2 | R458 | B5 | | |
| R367 | *A2 | R459 | A5 | TP100 | B1 |
| R368 | A5 | R460 | B5 | TP300 | C2 |
| R369 | A4 | R461 | B5 | TP301 | A4 |
| R370 | A4 | R462 | C4 | | |
| R371 | A4 | R463 | C4 | *:B SIDE | |
| R372 | A4 | R464 | C4 | | |
| R373 | *A2 | R465 | A5 | | |
| R374 | *A2 | R466 | B5 | | |
| R375 | *A2 | R467 | B5 | | |
| R376 | *A2 | R468 | A5 | | |
| R377 | *A2 | R469 | B5 | | |
| R378 | *A2 | R470 | B5 | | |
| R379 | *A2 | R471 | B5 | | |
| R380 | *A2 | R472 | B5 | | |
| R381 | A5 | R473 | *B5 | | |
| R382 | A4 | R474 | *B5 | | |
| R383 | *A2 | R475 | *B5 | | |
| R384 | *A2 | R476 | *B5 | | |
| R385 | *A2 | R477 | *B5 | | |
| R386 | *C3 | R478 | *B5 | | |
| R387 | *C3 | R479 | *B5 | | |
| R388 | *C3 | R480 | *B5 | | |

HDC1000 (UCJ)
HDC1000 (J)
HDC1000 (CE)
HDC1100 (J)
HDC1400 (UC)
HDC1400 (J)
HDC1400 (CE)
HDC1400 (E)
HDC1450 (UC)
HDC1450 (CE)
HDC1500 (J)
HDC1500 (SY)
HDC1500 (CE)
HDC1500 (E)
HDC1550 (UC)
HDC1550 (CE)
HDC1580 (CN)
HDC1600 (J) J, E

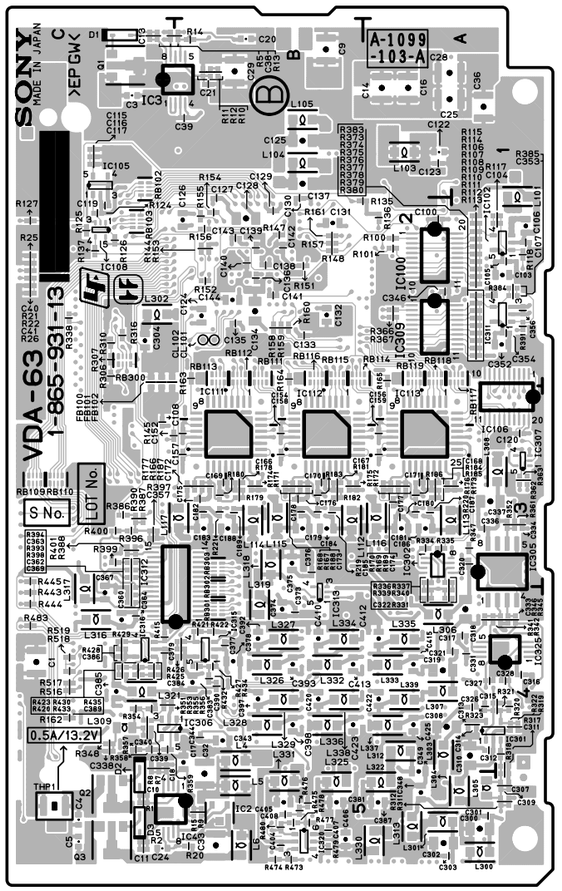9-968-213-07

Sony Corporation

Printed in Japan
2008. 6 08

©2005