SONY

HD COLOR CAMERA

HDC1000
HDC1100
HDC1500
HDC1550
HDC1580
HDC1600

Digital HDVS

Power HAD EX

MEMORY STICK ™

MAINTENANCE MANUAL

Volume 2 1st Edition (Revised 2)

Serial No. 10001 and Higher: HDC1000 (UCJ)
Serial No. 30001 and Higher: HDC1000 (J)
Serial No. 40001 and Higher: HDC1000 (CE)
Serial No. 30001 and Higher: HDC1100 (J)
Serial No. 30001 and Higher: HDC1500 (J)
Serial No. 10001 and Higher: HDC1500 (SY)
Serial No. 40001 and Higher: HDC1500 (CE)
Serial No. 10001 and Higher: HDC1550 (UC)
Serial No. 40001 and Higher: HDC1550 (CE)
Serial No. 50001 and Higher: HDC1580 (CN)
Serial No. 30001 and Higher: HDC1600 (J)

⚠警告

このマニュアルは，サービス専用です。
お客様が，このマニュアルに記載された設置や保守，点検，修理などを行うと感電や火災，人身事故につながることがあります。
危険をさけるため，サービストレーニングを受けた技術者のみご使用ください。

⚠ WARNING

This manual is intended for qualified service personnel only.
To reduce the risk of electric shock, fire or injury, do not perform any servicing other than that contained in the operating instructions unless you are qualified to do so. Refer all servicing to qualified service personnel.

⚠ WARNUNG

Die Anleitung ist nur für qualifiziertes Fachpersonal bestimmt.
Alle Wartungsarbeiten dürfen nur von qualifiziertem Fachpersonal ausgeführt werden. Um die Gefahr eines elektrischen Schlages, Feuergefahr und Verletzungen zu vermeiden, sind bei Wartungsarbeiten strikt die Angaben in der Anleitung zu befolgen. Andere als die angegeben Wartungsarbeiten dürfen nur von Personen ausgeführt werden, die eine spezielle Befähigung dazu besitzen.

⚠ AVERTISSEMENT

Ce manual est destiné uniquement aux personnes compétentes en charge de l’entretien. Afin de réduire les risques de décharge électrique, d’incendie ou de blessure n’effectuer que les réparations indiquées dans le mode d’emploi à moins d’être qualifié pour en effectuer d’autres. Pour toute réparation faire appel à une personne compétente uniquement.

目次 / Table of Contents

このマニュアルについて

本書の目的 ..... 3 (J)
関連マニュアル ..... 3 (J)

Manual Structure

Purpose of this manual ..... 3 (E)
Related manuals ..... 3 (E)

1. Spare Parts

1-1. Notes on Repair Parts 1-1
1-1. 補修部品注意事項 1-1
1-2. Exploded Views 1-3
1-2-1. HDC1000/1100 1-3
1-2-2. HDC1500/1550/1580/1600 1-16
1-3. Electrical Parts List 1-35
1-4. Optional Fixtures 1-194
1-5. Supplied Accessories 1-194
1-5-1. HDC1000/1100 1-194
1-5-2. HDC1500/1550/1580/1600 1-194

2. Semiconductor Pin Assignments

3. Block Diagrams

Overall (HDC1000/1100/1500/1550/1600) 3-2
Overall (HDC1580) 3-3
AU-298/DAP-33 3-5
AT-163 3-6
DPR-265 3-8
DPR-265C 3-9
SDI-84 3-10
SDI-84C 3-11
VDA-63 3-12
TG-243/247 3-13
MX-109 3-14
TR-136 3-15

4. Schematic Diagrams

AT-163 4-3
AT-166 4-10
AU-298 4-12
BI-175 4-16
BI-187 4-17
BI-188 4-18
BI-189 4-19
CN-2578 4-20
CN-2579 4-21
CN-2602 4-22
CN-2603/2603B 4-22
CN-2604 4-23
CN-2605 4-23
CN-2606 4-24
CN-2607 4-24
CN-2608 4-24
CN-2609 4-25
CN-2614/2614B 4-25
CN-2615 4-26
CN-2616 4-26
CN-2617 4-27
CN-2618 4-28
CN-2619 4-28
CN-2620 4-29
CN-2621 4-29
CN-2622 4-30
CN-2623 4-30
CN-2640 4-30
CN-2671 4-30
CN-2712 4-31
CN-2723 4-32
DAP-33 4-33
DPR-265 4-37
DPR-265C 4-49
DR-528 4-62
DR-562 4-64
FL-337 4-67
FL-338 4-67
LE-291 4-68
LE-308 4-70
LE-309 4-71

MB-1059 4-72
MB-1060 4-74
MX-109 4-78
PA-317 4-81
PA-317C 4-85
PA-327 4-89
SDI-84 4-93
SDI-84C 4-101
SW-1233 4-108
SW-1236 4-110
SW-1237 4-110
SW-1238 4-111
SW-1239 4-111
SW-1240 4-111
SW-1241/1241B 4-112
SW-1242 4-112
SW-1245 4-112
SW-1273 4-113
TG-243 4-114
TG-243C 4-118
TG-247 4-122
TR-136 4-126
VDA-63 4-133
Frame Wiring (HDC1000/1100) 4-138
Frame Wiring (HDC1500/1550/1600) 4-139
Frame Wiring (HDC1580) 4-140

5. Board Layouts

AT-163 5-2
AT-166 5-3
AU-298 5-4
BI-175 5-5
BI-187 5-5
BI-188 5-6
BI-189 5-6
CN-2578 5-7
CN-2579 5-7
CN-2602 5-7
CN-2605 5-7
CN-2603 5-8
CN-2604 5-9
CN-2606 5-9
CN-2607 5-10
CN-2608 5-10
CN-2609 5-10
CN-2614 5-11
CN-2615 5-11
CN-2616 5-11
CN-2617 5-11
CN-2618 5-11
CN-2619 5-12
CN-2620 5-12
CN-2621 5-13
CN-2622 5-14
CN-2623 5-14
CN-2640 5-14
CN-2671 5-14
CN-2712 5-14
CN-2723 5-14
DAP-33 5-15
DPR-265 5-16
DR-528 5-18
DR-562 5-19
DU-369 5-19
FL-337 5-20
FL-338 5-20
LE-291 5-21
LE-308 5-21
LE-309 5-21
MB-1059 5-23
MB-1060 5-24
MX-109 5-27
PA-317 5-28
PA-327 5-29
SDI-84 5-30
SW-1233 5-32
SW-1236 5-34
SW-1237 5-34
SW-1238 5-34
SW-1239 5-34
SW-1240 5-34
SW-1242 5-34
SW-1245 5-34
SW-1241 5-35
SW-1273 5-36
TG-243 5-38
TG-247 5-39
TR-136 5-40
VDA-63 5-42

このマニュアルについて

本書の目的

本書は，HD COLOR CAMERA HDC1000/1100/1500/1600のメンテナンスマニュアルVolume 2です。
本書は，システム／サービスエンジニアの方々にご使用いただくことを想定し，部品レベルまでのサービスを前提とした情報（パーツリスト，回路図，マウント図等）を記載しています。

関連マニュアル

本機には，この「メンテナンスマニュアルVolume 2」のほかに，下記のマニュアルが用意されています。

- **HDC1000シリーズ　オペレーションマニュアル（HDC1000/1100に付属）**
  HDC1000/1100を実際に運用および操作するのに必要なマニュアルです。
  部品番号：3-903-903-0X

- **HDC1500シリーズ　オペレーションマニュアル（HDC1500/1600に付属）**
  HDC1500/1600を実際に運用および操作するのに必要なマニュアルです。
  部品番号：3-868-749-0X

- **メンテナンスマニュアルVolume 1（別途用意）**
  HDC1000/1100/1500/1600の保守に関する情報と，部品交換および調整などのサービスに関する情報を記載しています。
  部品番号：9-968-211-0X

- **“Semiconductor Pin Assignments”CD-ROM版（別途用意）**
  この“Semiconductor Pin Assignments” CD-ROM版は，B&Pカンパニーの機器に使用されている半導体を検索することができます。
  メンテナンスマニュアルVolume 2には，その機種に使用されている半導体一覧とそのID番号を記載していますので，このCD-ROM版と合わせて使用してください。
  部品番号：9-968-546-XX

Manual Structure

Purpose of this manual

This manual is the maintenance manual Volume 2 for HD Color Camera HDC1000/1500/1550/1580.
This manual describes the information items that premise the service based on the components parts such as spare parts lists, schematic diagrams and board layouts, assuming use of system and service engineers.

Related manuals

Besides this maintenance manual Volume 2 the following manual is available for this unit.

- **HDC1000 Series Operation Manual (Supplied with HDC1000)**
  This manual is necessary for application and operation of HDC1000.
  Part number: 3-903-903-0X

- **HDC1500 Series Operation Manual (Supplied with HDC1500/1550)**
  This manual is necessary for application and operation of HDC1500/1550.
  Part number: 3-868-749-0X

- **HDC1580 Operation Manual (Supplied with HDC1580)**
  This manual is necessary for application and operation of HDC1580.
  Part number: 3-992-285-0X

- **Maintenance Manual Volume 1 (Available on request)**
  Describes the maintenance and service information necessary for parts replacement and adjustments of HDC1000/1500/1550/1580.
  Part number: 9-968-212-0X

- **“Semiconductor Pin Assignments” CD-ROM (Available on request)**
  This “Semiconductor Pin Assignments” CD-ROM allows you to search for semiconductors used in Broadcast and Professional equipment.
  The maintenance manual Volume 2 contains a complete list of semiconductors and their ID Nos., and thus should be used together with the CD-ROM.
  Part number: 9-968-546-XX

Section 1
Spare Parts

1-1. Notes on Repair Parts

1. Safety Related Components Warning

WARNING

Components marked ⚠ are critical to safe operation. Therefore, specified parts should be used in the case of replacement.

2. Standardization of Parts

Some repair parts supplied by Sony differ from those used for the unit. These are because of parts commonality and improvement.
Parts list has the present standardized repair parts.

3. Stock of Parts

Parts marked with "o" at SP (Supply Code) column of the spare parts list may not be stocked. Therefore, the delivery date will be delayed.

4. Harness

Harnesses with no part number are not registered as spare parts.

1-1. 補修部品注意事項

1. 安全重要部品

⚠警告

⚠印のついた部品は安全性を維持するために重要な部品です。したがって，交換する時は必ず指定の部品を使ってください。

2. 部品の共通化

ソニーから供給する補修用部品は，セットに使われているものと異なることがあります。
これは部品の共通化，改良等によるものです。
部品表には現時点での共通化された補修用部品が記載されています。

3. 部品の在庫


部品表のSP (Supply code) 欄に"o"で示される部品は在庫していないことがあり，納期が長くなることがあります。

4. ハーネス

部品番号が記載されていないハーネスは，サービス部品として登録されていません。


1-2. Exploded Views

1-2-1. HDC1000/1100

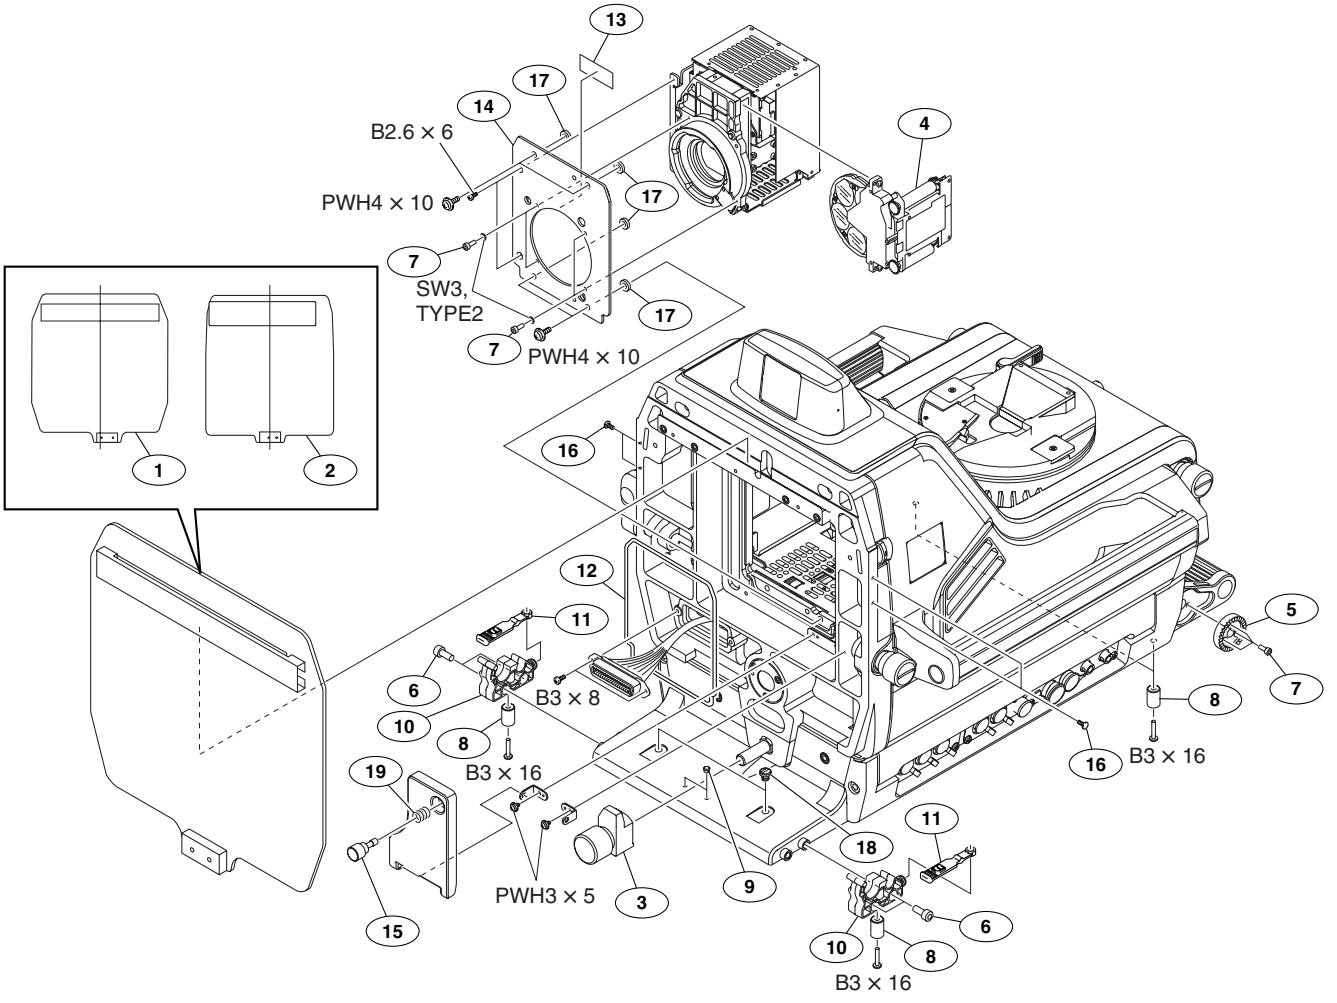

No.	Part No.	SP	Description
1	A-7612-327-E	s	COVER ASSY, FRONT
2	A-8278-526-E	s	COVER ASSY,FRONT(H1)
3	X-3692-305-1	o	RETAINER ASSY,LENS
4	1-788-329-11	s	DISK UNIT, FILTER
5	2-280-511-12	o	BRACKET,ADJUSTMENT ANGLE
6	2-391-520-21	s	BOLT (M5X12),HOLE, HEXAGON(ST)
7	2-623-773-11	s	BOLT (M3X8),STAINLESS
8	3-185-902-02	s	FOOT, FRONT (ABS)
9	3-545-657-11	s	BUSHING(BLACK) (PLA)
10	3-612-710-02	o	CLAMP,CABLE
11	3-612-712-01	s	BAND,CLAMP
12	3-615-750-62	s	SHIELD CUSHION(C)
13	3-627-269-02	o	SHEET,HEAT CONDUCTION(OHB)
14	3-627-897-02	s	PANEL,FRONT
15	3-657-657-00	s	SCREW (M5)
16	3-673-018-00	s	SCREW,BLIND (PLA) (WHITE)
	3-673-018-11	s	SCREW, BLIND (PLA) (BLACK)
17	3-701-440-21	s	WASHER PLASTIC (3.5X6X0.5)
18	3-725-907-01	s	BUSHING,BLIND
19	4-866-663-01	s	SPRING,COMPRESSION
	7-621-773-95	s	SCREW +B2.6X6(EP-FE/ZNBK/CM2)
	7-623-208-22	s	SPRING WASHER (3MM)
	7-682-247-04	s	SCREW +K 3X6
	7-682-548-04	s	SCREW +B3X8
	7-682-552-09	s	SCREW +B3X16
	7-682-903-01	s	SCREW +PWH 3X5
	7-682-904-21	s	SCREW +PWH 4X10


CCD Unit (HDC1000/1100)

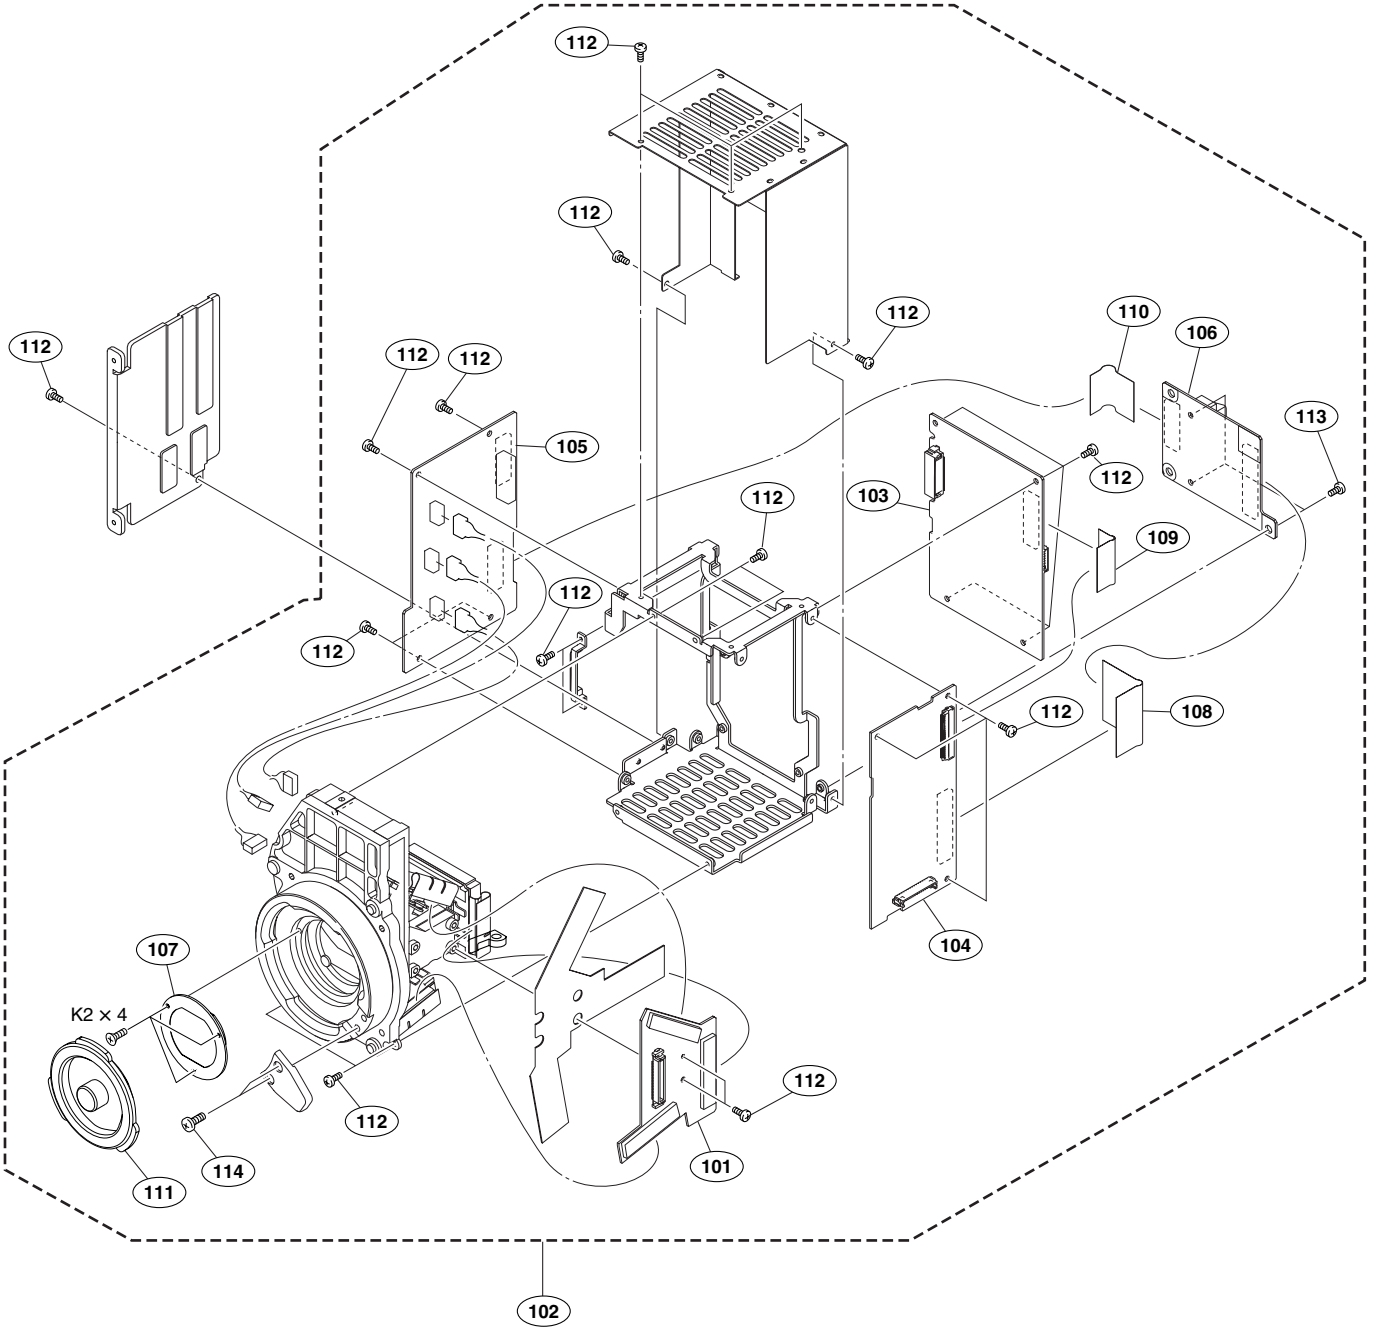


No.	Part No.	SP	Description
101	A-1099-261-A	s	MOUNTED CIRCUIT BOARD, CN-2578 (for HDC1000)
	A-1099-206-A	s	MOUNTED CIRCUIT BOARD, CN-2712 (for HDC1100)
102	A-1153-996-A	s	CCD UNIT 1000HDC (for HDC1000)
	A-1153-997-A	s	CCD UNIT 1100HDC (for HDC1100)
103	※ A-1159-980-A	s	MOUNTED CIRCUIT BOARD, TG-243G (GOLD) (for HDC1000)
	※ A-1101-922-A	s	MOUNTED CIRCUIT BOARD, TG-243 (SILVER) (for HDC1000)
	※ A-1159-992-A	s	MOUNTED CIRCUIT BOARD, TG-247G (GOLD) (for HDC1100)
	※ A-1126-983-A	s	MOUNTED CIRCUIT BOARD, TG-247 (SILVER) (for HDC1100)
104	※ A-1159-981-A	s	MOUNTED CIRCUIT BOARD, DR-528G (GOLD) (for HDC1000)
	※ A-1099-260-A	s	MOUNTED CIRCUIT BOARD, DR-528 (SILVER) (for HDC1000)
	※ A-1159-993-A	s	MOUNTED CIRCUIT BOARD, DR-562G (GOLD) (for HDC1100)
	※ A-1099-205-A	s	MOUNTED CIRCUIT BOARD, DR-562 (SILVER) (for HDC1100)
105	※ A-1159-982-A	s	MOUNTED CIRCUIT BOARD, PA-317G (GOLD) (for HDC1000)
	※ A-1099-263-A	s	MOUNTED CIRCUIT BOARD, PA-317 (SILVER) (for HDC1000)
	※ A-1159-994-A	s	MOUNTED CIRCUIT BOARD, PA-327G (GOLD) (for HDC1100)
	※ A-1099-203-A	s	MOUNTED CIRCUIT BOARD, PA-327 (SILVER) (for HDC1100)
106	※ A-1159-983-A	s	MOUNTED CIRCUIT BOARD, CN-2579G (GOLD) (for HDC1000)
	※ A-1099-262-A	s	MOUNTED CIRCUIT BOARD, CN-2579 (SILVER) (for HDC1000)
	※ A-1159-995-A	s	MOUNTED CIRCUIT BOARD, CN-2723G (GOLD) (for HDC1100)
	※ A-1099-210-A	s	MOUNTED CIRCUIT BOARD, CN-2723 (SILVER) (for HDC1100)
107	1-758-483-11	o	FILTER UNIT, OPTICAL
108	※ 1-831-656-11	s	CABLE, FLEXIBLE FLAT (30 CORE) (GOLD)
	※ 1-830-735-11	s	CABLE, FLEXIBLE FLAT (30 CORE) (SILVER)
109	※ 1-831-659-11	s	CABLE, FLEXIBLE FLAT (45 CORE) (GOLD) (for HDC1000)
	※ 1-830-484-11	s	CABLE, FLEXIBLE FLAT (45 CORE) (SILVER) (for HDC1000)
	※ 1-831-660-11	s	CABLE, FLEXIBLE FLAT (50 CORE) (GOLD) (for HDC1100)
	※ 1-830-794-11	s	CABLE, FLEXIBLE FLAT (50 CORE) (SILVER) (for HDC1100)
110	※ 1-831-658-11	s	CABLE, FLEXIBLE FLAT (40 CORE) (GOLD)
	※ 1-830-485-11	s	CABLE, FLEXIBLE FLAT (40 CORE) (SILVER)
111	3-699-048-01	s	CAP,MOUNT
112	3-729-076-11	s	SCREW +B2X4 (STEEL)
113	3-965-077-01	s	SCREW, SPECIAL (M2)
114	4-644-165-01	s	SCREW (M2.6X4),0 PLATE P1 MAIN
	7-627-452-28	s	SCREW,PRECISION +K 2X4

※:「1−6. 部品交換時の注意事項」を参照してください。
※: Refer to Section 1-6, “Note for Replacing Parts”.

Right Side Panel and Boards (HDC1000/1100)

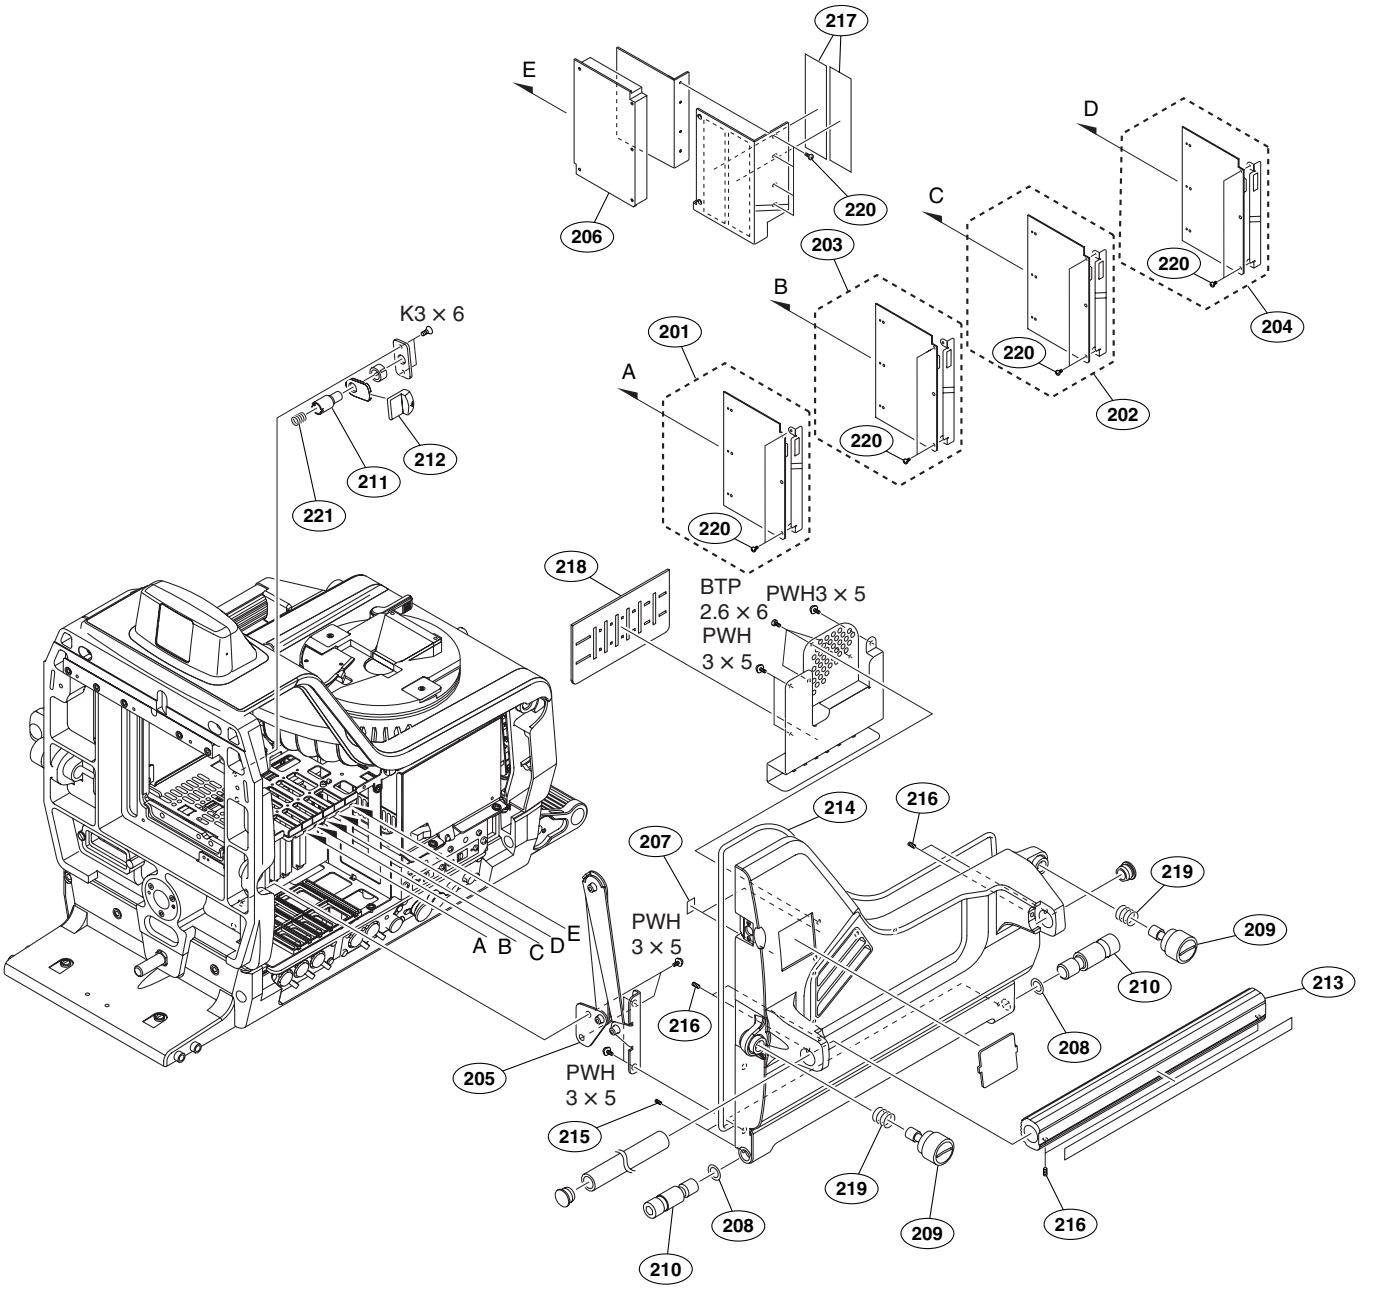


No.	Part No.	SP	Description
201	A-1101-923-A	s	MOUNTED CIRCUIT BOARD, VDA-63
202	A-1101-924-A	s	MOUNTED CIRCUIT BOARD, AU-298
203	A-1101-925-A	s	MOUNTED CIRCUIT BOARD, DAP-33
204	A-1101-926-A	s	MOUNTED CIRCUIT BOARD, AT-163
205	X-3692-313-3	o	STAY (RIGHT) ASSY
206	⚠ 1-478-790-11	s	CONVERTER UNIT, DC-DC
207	3-185-871-02	s	TAPE, DROP PROTECTION SHIELD
208	3-185-878-01	s	WASHER (PA)
209	3-185-887-01	o	SCREW, KNOB
210	3-185-890-01	s	BOLT, SHOULDER (SUS)
211	3-185-905-02	o	SOLENOID
212	3-605-906-01	o	CAP,LATCH (WHITE)
	3-605-906-11	s	CAP,LATCH (BLACK)
213	3-612-402-02	o	HANDLE COVER(C) (WHITE)
214	3-615-750-62	s	SHIELD CUSHION(C)
215	3-701-505-00	s	SET-SCREW,HEX 3X3 ST
216	3-701-510-00	s	SET-SCREW,HEXGON 4X4 (WP) ST
217	3-872-620-01	s	THERMATTACH TAPE(DD)
218	3-872-695-01	s	BOARD CUSHION
219	4-367-209-00	s	SPRING,COMPRESSION
220	4-654-273-02	s	ACE (M2), LOCK
221	4-926-395-01	s	SPRING,COMPRESSION(COIL) (ST)
	7-682-247-04	s	SCREW +K 3X6
	7-682-903-01	s	SCREW +PWH 3X5
	7-685-533-14	s	SCREW +BTP2.6X6

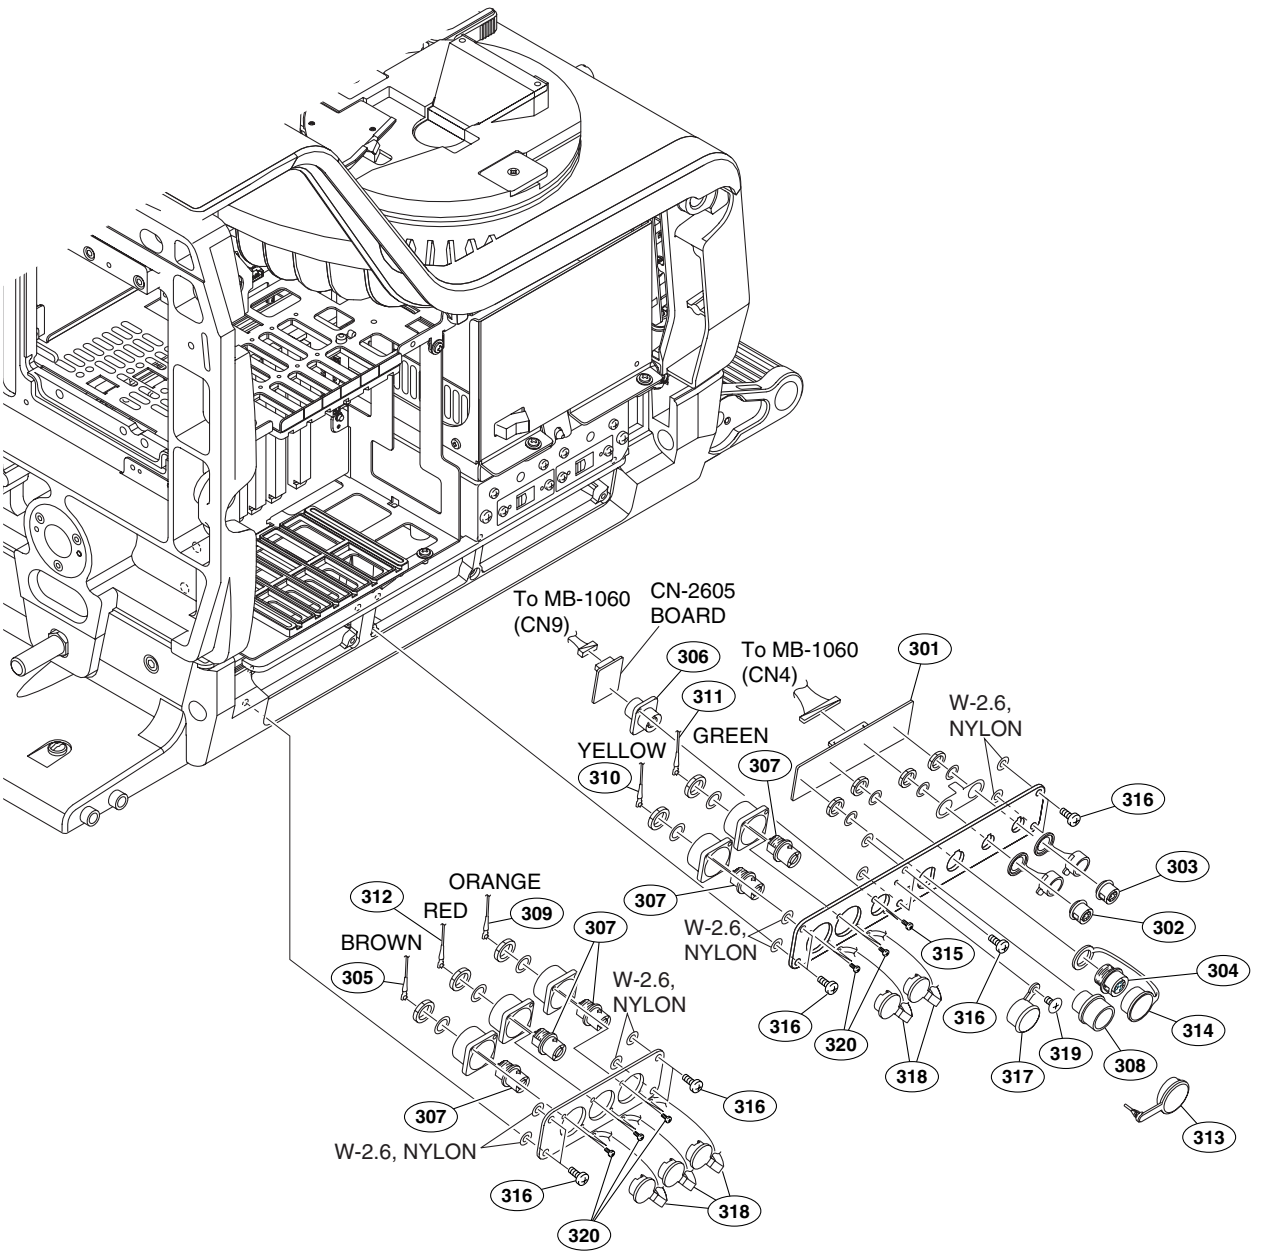

No.	Part No.	SP	Description
301	A-1124-076-A	s	MOUNTED CIRCUIT BOARD, CN-2604
302	1-562-222-21	s	RECEPTACLE,CONNECTOR 6P
303	1-563-929-11	s	CONNECTOR,ROUND TYPE (RF) 4P
304	1-565-443-11	o	RECEPTACLE,CONNECTOR 10P
305	1-757-430-11	s	CABLE ASSEMBLY, COAXIAL
306	1-766-696-11	o	CONNECTOR, ROUND TYPE 8P
307	1-784-240-11	s	CONVERTER, COAXIAL CONNECTOR
308	1-819-262-11	s	CONNECTOR, ROUND TYPE 12P
309	1-830-738-11	s	CABLE ASSEMBLY, COAXIAL
310	1-830-739-11	s	CABLE ASSEMBLY, COAXIAL
311	1-830-740-11	s	CABLE ASSEMBLY, COAXIAL
312	1-830-741-11	s	CABLE ASSEMBLY, COAXIAL


No.	Part No.	SP	Description
313	3-605-338-03	s	CAP,CONNECTOR
314	3-678-769-00	s	CAP
315	3-694-181-01	s	AROCK PRECISION +P2.6X5 TYPE 1
316	3-719-159-01	s	SCREW (M3), (+ BW) (STEEL)
317	3-868-657-02	s	CAP,BNC
318	3-872-935-01	s	CAP,BNC
319	3-965-077-01	s	SCREW, SPECIAL (M2)
320	4-654-273-02	s	ACE (M2), LOCK
	7-623-923-01	s	WASHER,POLYETHYLENE 2.6

Left Side Panel (HDC1000/1100)

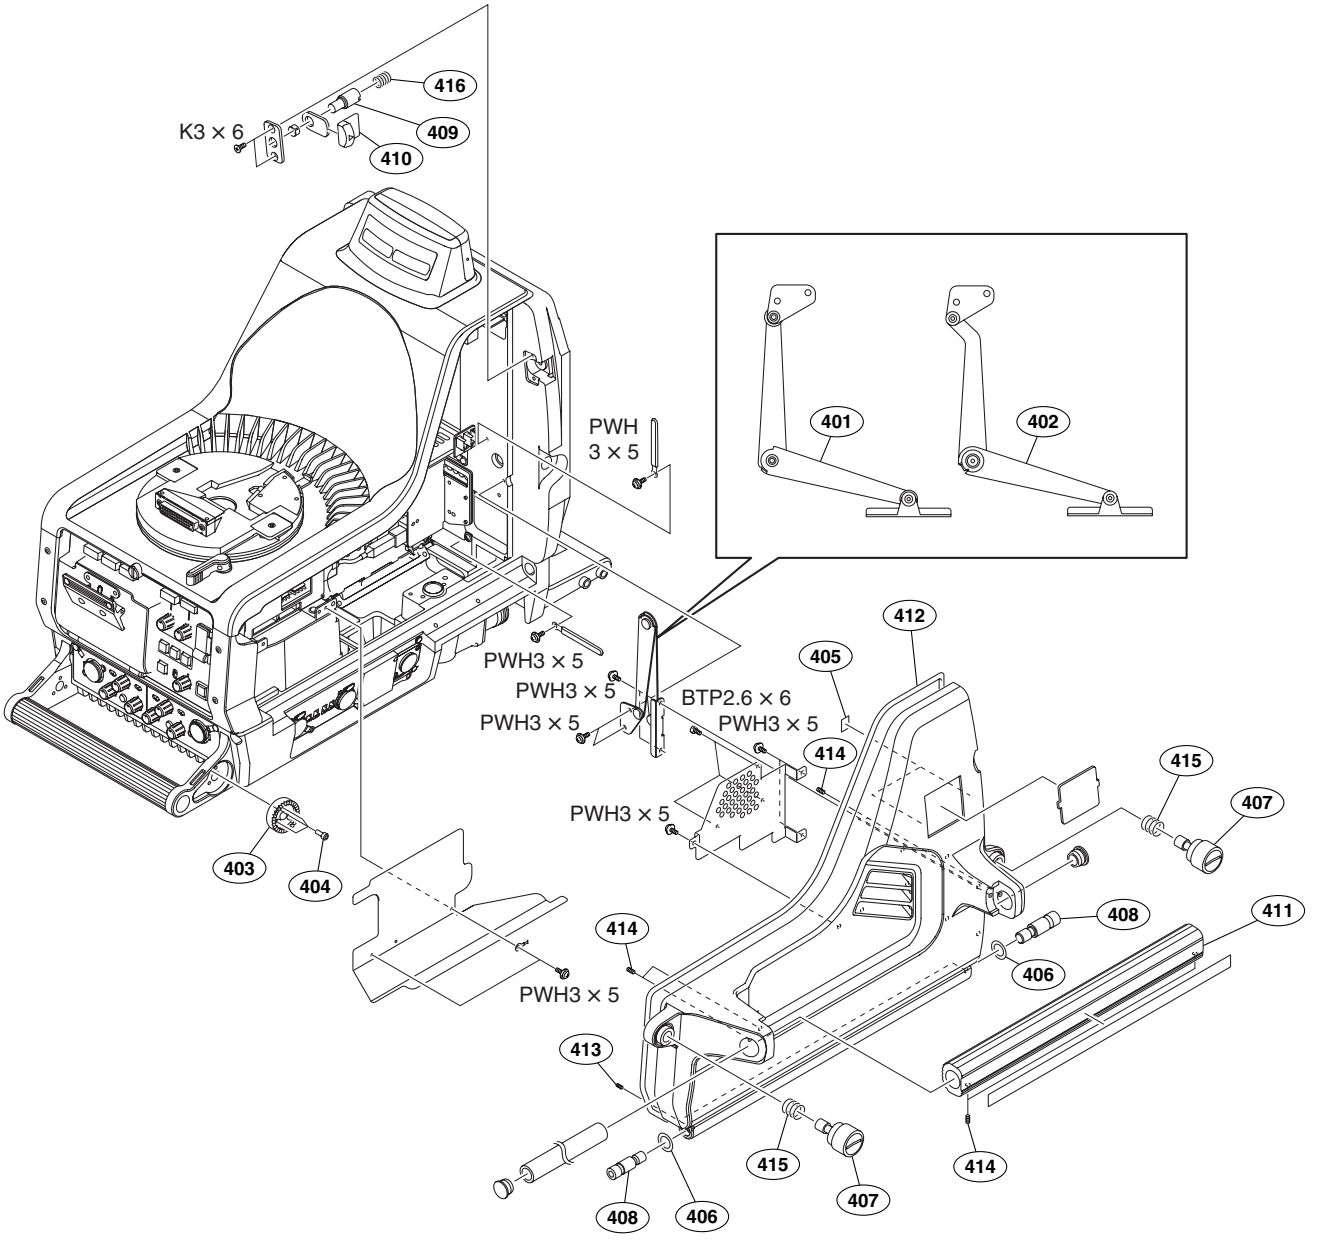

No.	Part No.	SP	Description
401	X-3692-312-4	o	STAY (LEFT) ASSY
402	X-3605-866-1	o	STAY L ASSY(H1)
403	2-280-511-12	o	BRACKET,ADJUSTMENT ANGLE
404	2-623-773-11	s	BOLT (M3X8),STAINLESS
405	3-185-871-02	s	TAPE, DROP PROTECTION SHIELD
406	3-185-878-01	s	WASHER (PA)
407	3-185-887-01	o	SCREW, KNOB
408	3-185-890-01	s	BOLT, SHOULDER (SUS)
409	3-185-905-02	o	SOLENOID
410	3-605-906-01	o	CAP,LATCH (WHITE)
	3-605-906-11	s	CAP,LATCH (BLACK)
411	3-612-402-02	o	HANDLE COVER(C) (WHITE)


No.	Part No.	SP	Description
412	3-615-750-62	s	SHIELD CUSHION(C)
413	3-701-505-00	s	SET-SCREW,HEX 3X3 ST
414	3-701-510-00	s	SET-SCREW,HEXGON 4X4 (WP) ST
415	4-367-209-00	s	SPRING,COMPRESSION
416	4-926-395-01	s	SPRING,COMPRESSION(COIL) (ST)
	7-682-247-04	s	SCREW +K 3X6
	7-682-903-01	s	SCREW +PWH 3X5
	7-685-533-14	s	SCREW +BTP2.6X6

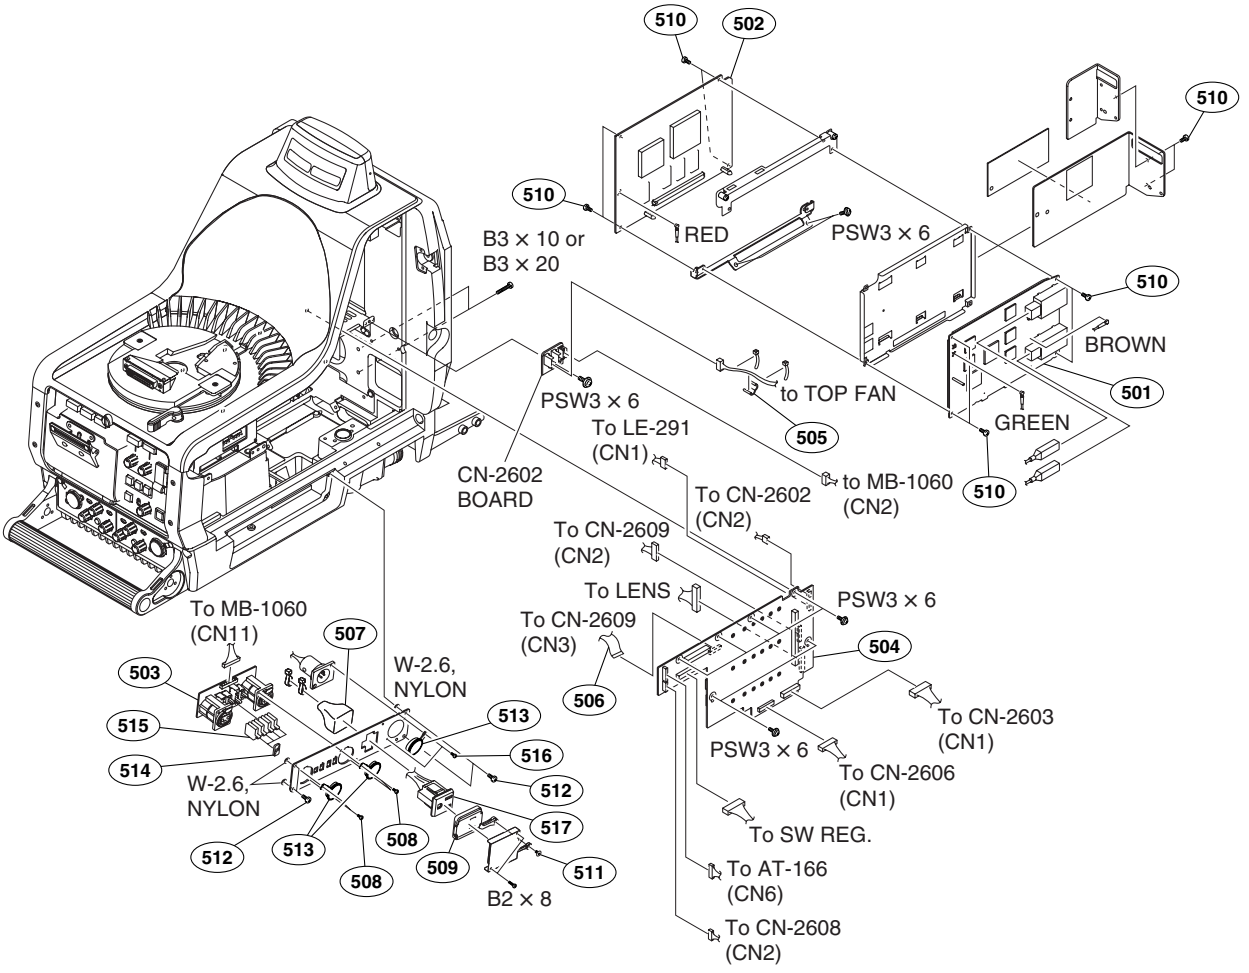

No.	Part No.	SP	Description
501	A-1099-252-A	s	MOUNTED CIRCUIT BOARD, SDI-84
502	A-1101-927-A	s	MOUNTED CIRCUIT BOARD, DPR-265
503	A-1124-078-A	s	MOUNTED CIRCUIT BOARD, CN-2606
504	※ A-1166-187-A	s	MOUNTED CIRCUIT BOARD, MB-1060G (GOLD)
	※ A-1124-080-A	s	MOUNTED CIRCUIT BOARD, MB-1060 (SILVER)
505	1-500-051-21	s	BEAD, FERRITE (WITH CASE)
506	※ 1-831-118-11	s	CABLE, FLEXIBLE FLAT (30 CORE) (GOLD)
	※ 1-757-644-11	s	CABLE, FLEXIBLE FLAT (30 CORE) (SILVER)
507	2-254-842-02	s	COVER,SWITCH INSULATING
508	3-165-162-01	s	SCREW(+P2.6X5)(TYPE 1) (ST)
509	3-186-500-02	s	LID (N), OUTLET
510	3-364-941-01	s	SCREW (+B) (2.6X5),NYLOK
511	3-694-825-11	s	SCREW M3 STEP,SPECIAL HEAD ST
512	3-719-159-01	s	SCREW (M3), (+ BW) (STEEL)
513	3-748-142-01	s	COVER,CONNECTOR
514	3-796-985-02	s	CUSHION,DROP PROTECTION
515	3-796-986-01	s	KNOB,SLIDE SW
516	4-654-273-02	s	ACE (M2), LOCK
517	1-819-791-11	s	OUTLET, AC (3P) (HDC1000(UCJ,J)/1100(J))
	1-251-221-11	s	OUTLET, AC (HDC1000(CE))
	7-621-772-40	s	SCREW +B 2X8(EP-FE/ZNBK/CM2)
	7-623-923-01	s	WASHER,POLYETHYLENE 2.6
	7-682-549-04	s	SCREW +B3X10(EP-FE/CU,NI,CR)
	7-682-553-04	s	SCREW +B3X20(EP-FE/CU,NI,CR)
	7-682-947-01	s	SCREW +PSW 3X6

※:「1−6. 部品交換時の注意事項」を参照してください。
※: Refer to Section 1-6, “Note for Replacing Parts”.


Control Panel (HDC1000/1100)

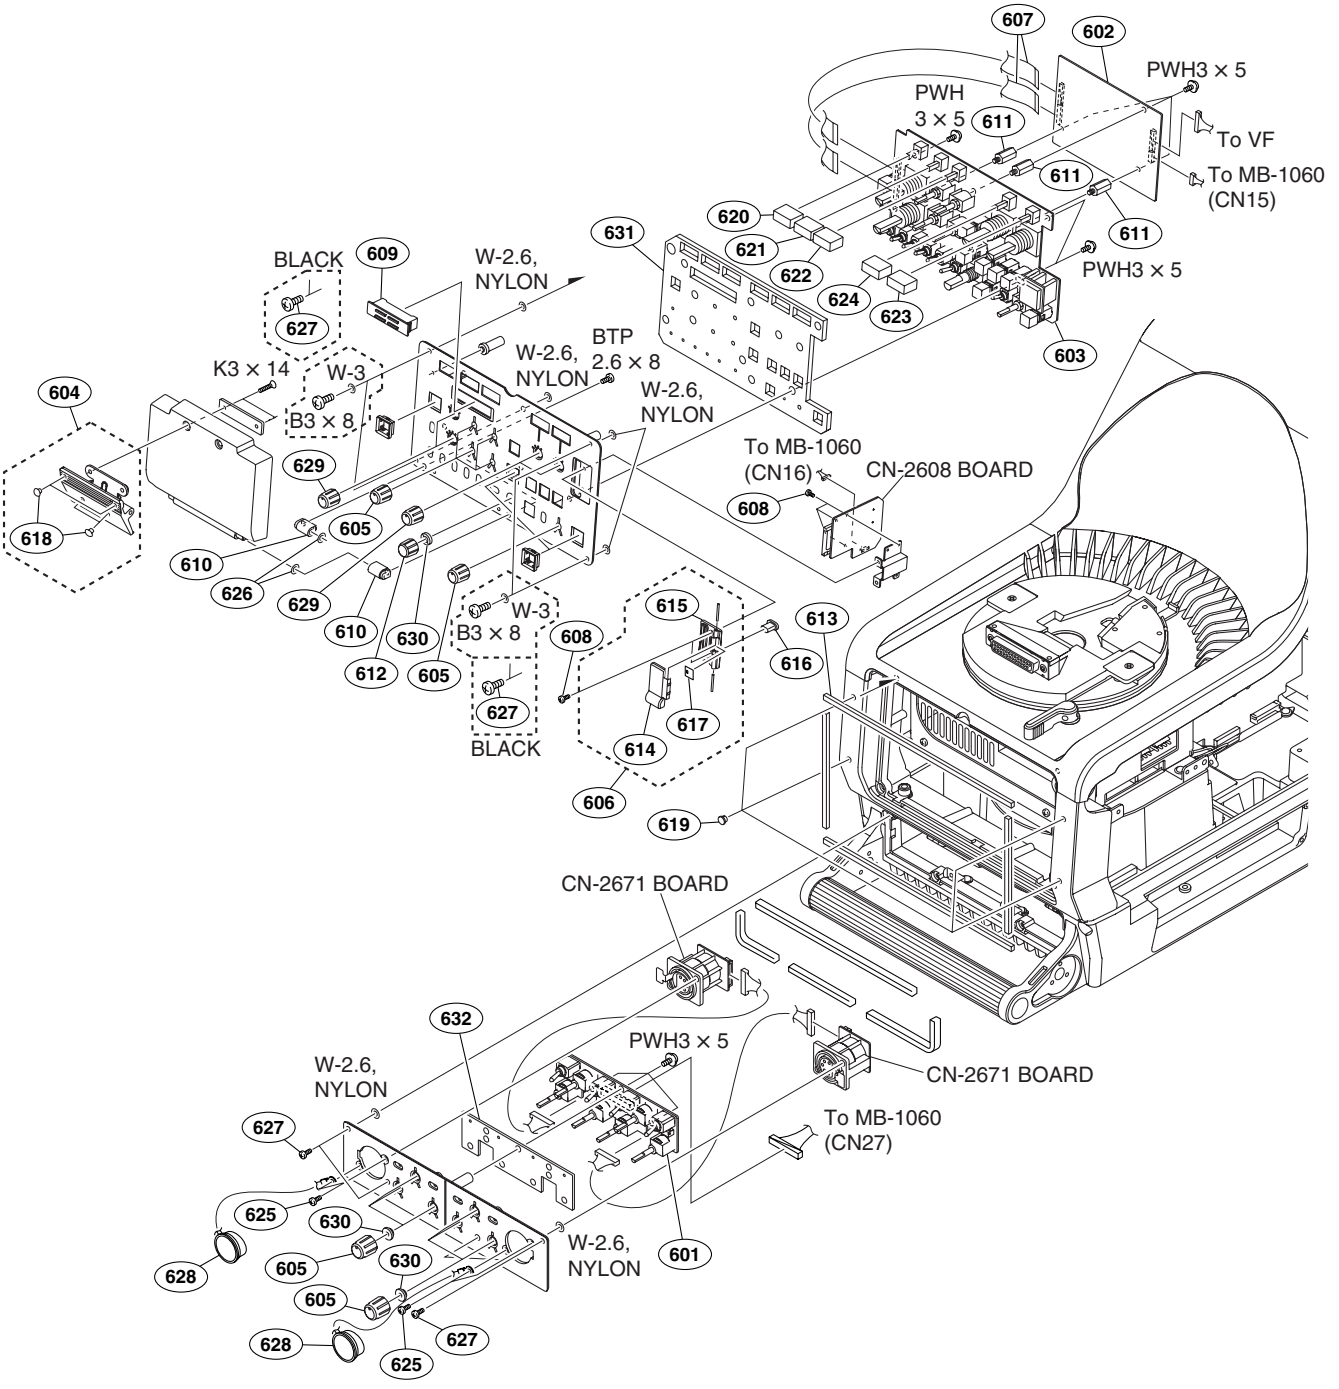

No.	Part No.	SP	Description
601	A-1124-075-A	s	MOUNTED CIRCUIT BOARD, CN-2603 (HDC1000(UCJ,J)/1100(J))
	A-1177-500-A	s	MOUNTED CIRCUIT BOARD, CN-2603B (HDC1000(CE))
602 ※	A-1159-990-A	s	MOUNTED CIRCUIT BOARD, AT-166G (GOLD)
※	A-1126-980-A	s	MOUNTED CIRCUIT BOARD, AT-166 (SILVER)
603 ※	A-1163-069-A	s	MOUNTED CIRCUIT BOARD, SW-1233G (GOLD)
※	A-1124-074-A	s	MOUNTED CIRCUIT BOARD, SW-1233 (SILVER)
604	X-3167-562-1	o	PAPER ASSY (WHITE)
	X-3704-711-1	s	PAPER HOLDER ASSY (BLACK)
605	X-3167-563-1	s	KNOB (DIA.3) ASSY, VOLUME
606	X-3605-883-2	s	SLOT,MEMORY STICK ASSY (ABS) (WHITE)
	X-3704-707-1	s	SLOT,MEMORY STICK ASSY (BLACK)
607 ※	1-831-132-11	s	CABLE, FLEXIBLE FLAT (30 CORE) (GOLD)
※	1-823-558-11	s	CABLE, FLEXIBLE FLAT (30 CORE) (SILVER)
608	3-165-162-01	s	SCREW(+P2.6X5)(TYPE 1) (ST)
609	3-185-867-01	o	CATCHER, MAGNET (FERRITE)
610	3-185-875-01	o	HINGE, REAR (WHITE)
	3-185-875-11	s	HINGE, REAR (BLACK)
611	3-565-714-00	o	SHAFT,CHASSIS
612	3-602-483-01	s	KNOB,VOLUME 6
613	3-615-750-62	s	SHIELD CUSHION(C)
614	3-627-299-01	o	CAP,MEMORY STICK (WHITE)
615	3-627-700-03	o	SLOT,MEMORY STICK (WHITE)
616	3-627-701-01	o	EJECTOR,MEMORY STICK
617	3-627-703-03	o	LEAF SPRING
618	3-644-002-00	o	CUSHION,HANDLE (RBR)
619	3-673-018-00	s	SCREW,BLIND (PLA) (WHITE)
	3-673-018-11	s	SCREW, BLIND (PLA) (BLACK)
620	3-692-320-01	o	BUTTON
621	3-692-321-01	o	BUTTON
622	3-692-322-01	o	BUTTON
623	3-692-324-01	o	BUTTON
624	3-692-325-01	o	BUTTON
625	3-694-181-01	s	AROCK PRECISION +P2.6X5 TYPE 1
626	3-701-441-11	s	WASHER PLASTIC (4.1X0.25)
627	3-719-159-01	s	SCREW (M3), (+ BW) (STEEL)
628	3-748-142-01	s	COVER,CONNECTOR
629	3-872-577-01	s	KNOB,VOLUME DIA.6
630	3-872-699-01	s	VR SLEEVE
631	3-872-713-01	s	CUSHION,DROP PROTECT REAR
632	3-872-714-01	s	CUSHION,DROP PROTECT INCOM
	7-623-923-01	s	WASHER,POLYETHYLENE 2.6
	7-682-251-04	s	SCREW +K 3X14
	7-682-548-04	s	SCREW +B3X8
	7-682-903-01	s	SCREW +PWH 3X5
	7-685-534-14	s	SCREW +BTP2.6X8 (SILVER)
	7-685-534-19	s	SCREW +BTP2.6X8(EP-FE/ZNBK/CM2) (BLACK)
	7-688-003-13	s	WASHER W3 MIDDLE


※:「1–6. 部品交換時の注意事項」を参照してください。
※: Refer to Section 1-6, “Note for Replacing Parts”.

Top Chassis (HDC1000/1100)

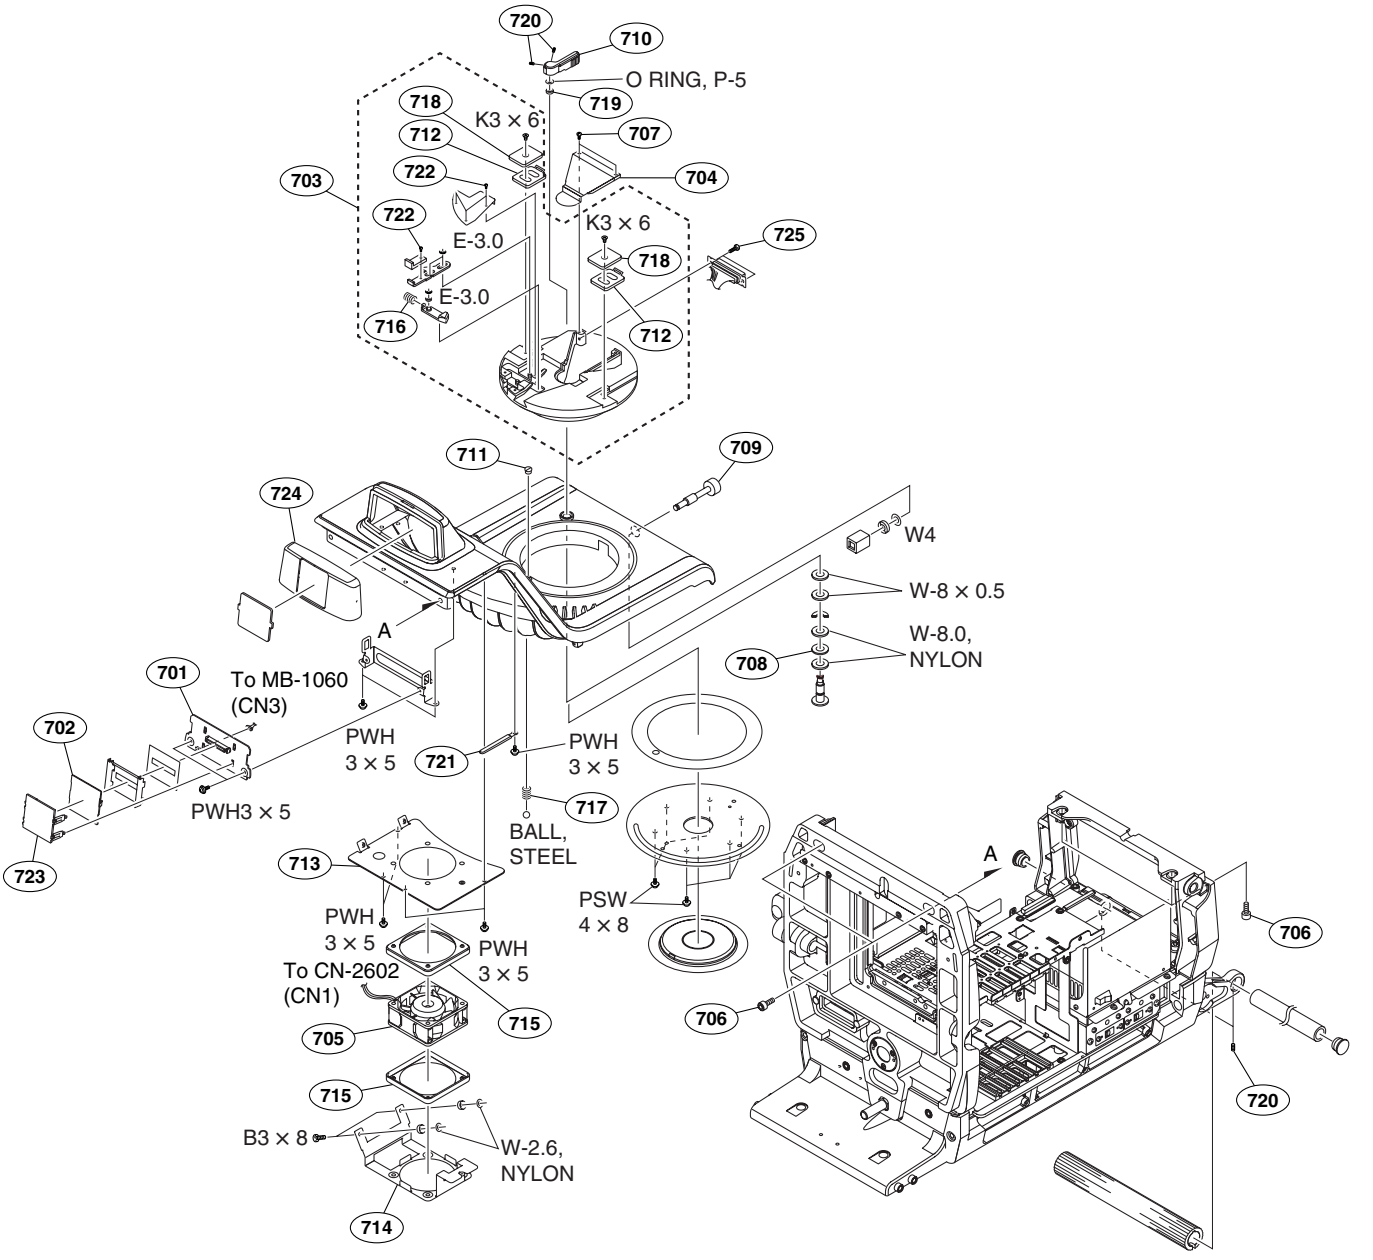

No.	Part No.	SP	Description
701	A-1126-981-A	s	MOUNTED CIRCUIT BOARD, LE-291
702	A-1126-982-A	s	MOUNTED CIRCUIT BOARD, LE-309
703	A-8314-047-A	o	PANNING ASSY
704	X-3167-699-2	o	GUARD ASSY, HARNESS
705	1-787-418-11	s	FAN, DC (SQUARE 60)
706	2-391-520-21	s	BOLT (M5X12),HOLE, HEXAGON(ST)
707	3-165-162-01	s	SCREW(+P2.6X5)(TYPE 1) (ST)
708	3-185-881-02	o	PLATE, LOCK PAN
709	3-185-885-01	o	SCREW, PAN FRICTION
710	3-185-886-04	s	LEVER, PAN LOCK
711	3-186-806-01	s	SCREW, LID
712	3-613-969-02	o	SPRING,EMC
713	3-627-249-02	o	BRACKET,FAN(1)
714	3-627-250-03	s	BRACKET,FAN(2)
715	3-627-260-01	o	PACKING,FAN
716	3-634-355-00	s	SPRING,COMPRESSION (STEEL)
717	3-641-622-00	s	SPRING (STEEL)
718	3-692-332-01	o	PLATE (A)
719	3-701-444-11	s	WASHER PLASTIC (6.2X9.5X0.25)
720	3-701-510-00	s	SET-SCREW,HEXGON 4X4 (WP) ST
721	3-703-150-11	o	CLAMP
722	3-719-381-01	s	SCREW +P M2X4 (ZNBK)(LOCK)
723	3-872-517-01	s	LED MATRIX MASK
724	3-872-521-01	s	UP TALLY COVER
725	4-654-273-02	s	ACE (M2), LOCK
	7-623-923-01	s	WASHER,POLYETHYLENE 2.6
	7-623-928-01	s	WASHER PLASTIC (8X0.5)
	7-623-928-11	s	WASHER 8.0, NYLON
	7-624-106-04	s	STOP RING, TYPE-E3(CZN-N4)
	7-624-209-00	s	RING,O P-5
	7-671-115-01	s	BALL,STEEL(5MM)
	7-682-247-04	s	SCREW +K 3X6
	7-682-548-04	s	SCREW +B3X8
	7-682-903-01	s	SCREW +PWH 3X5
	7-682-961-01	s	SCREW +PSW 4X8
	7-688-004-11	o	WASHER W4, MIDDLE


Chassis Block (HDC1000/1100)

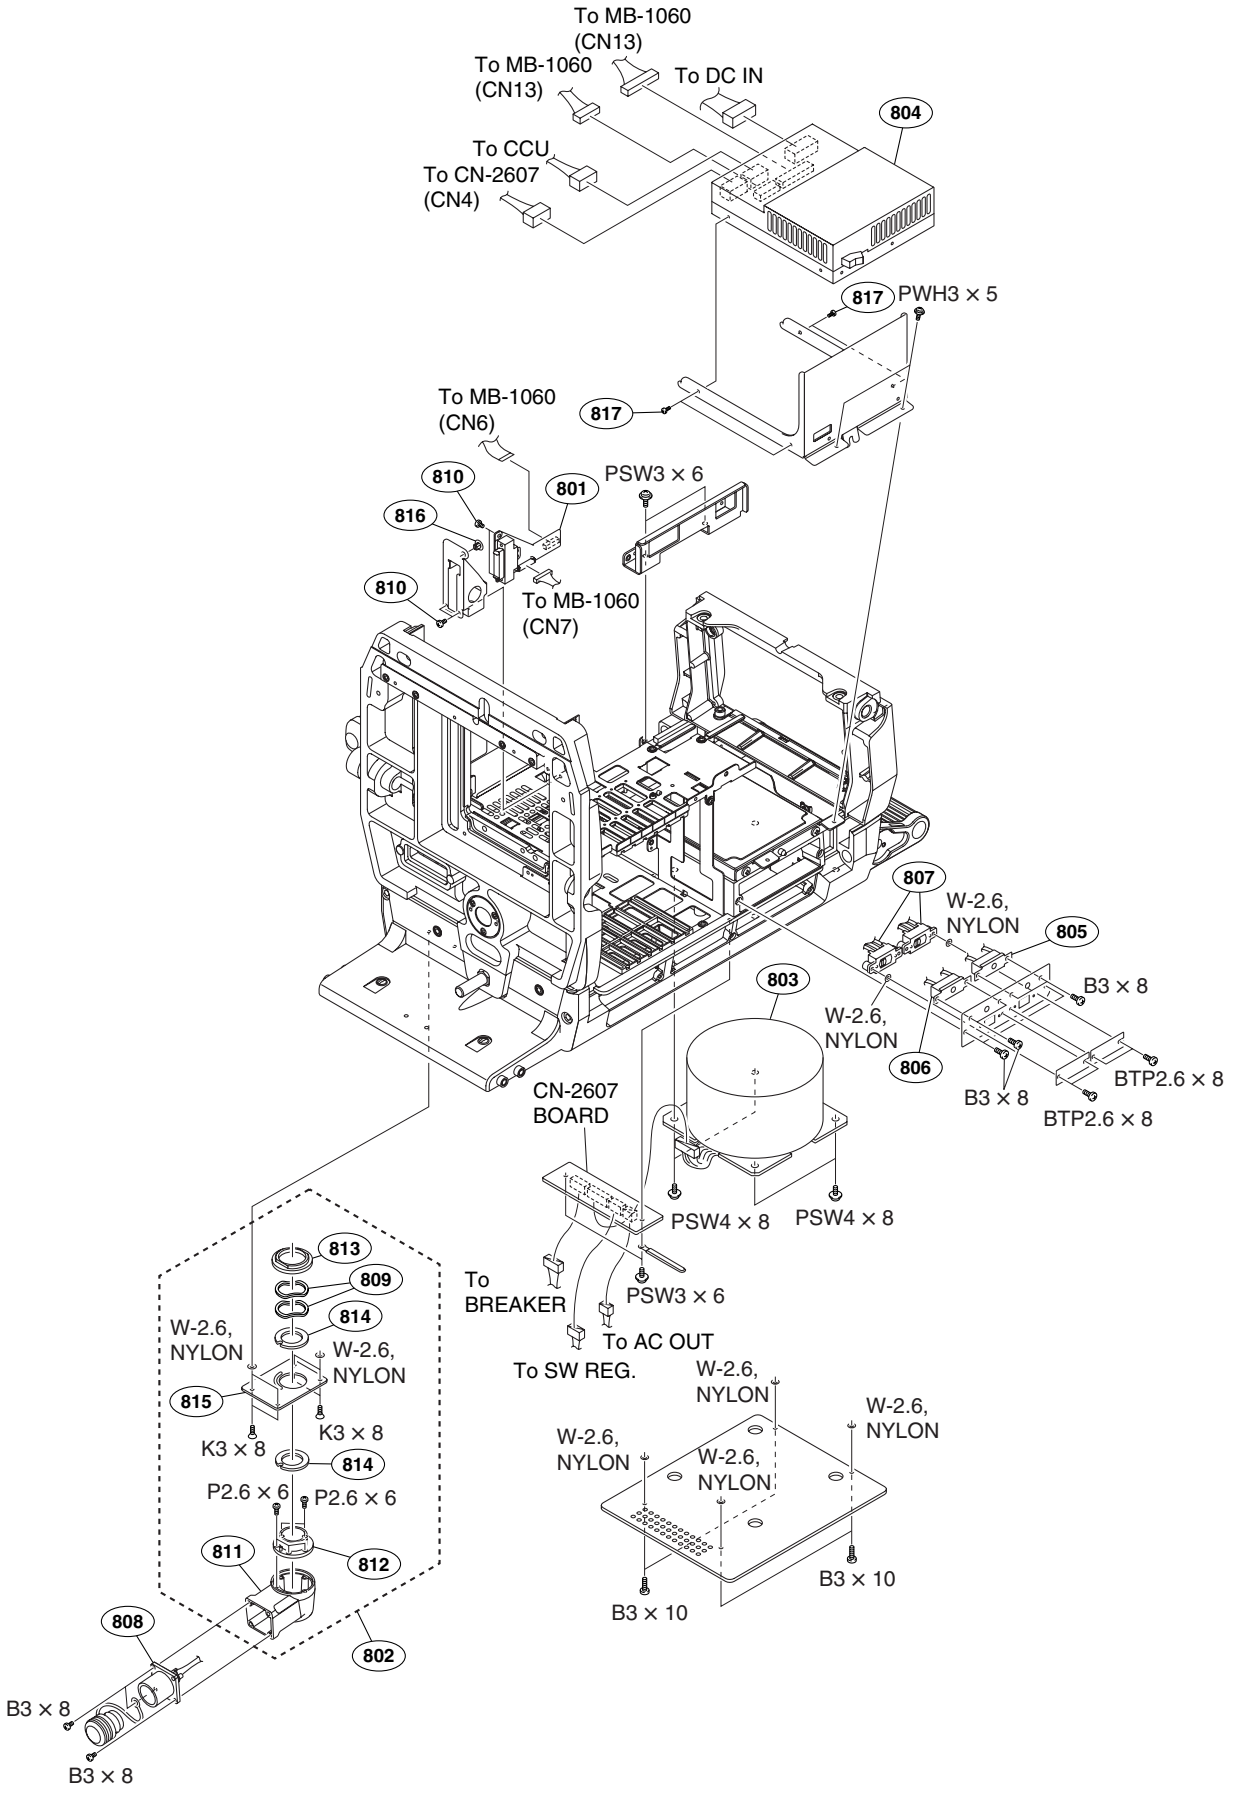


No.	Part No.	SP	Description
801	※ A-1166-186-A	s	MOUNTED CIRCUIT BOARD, CN-2609G (GOLD)
	※ A-1123-671-A	s	MOUNTED CIRCUIT BOARD, CN-2609 (SILVER)
802	A-8273-198-B	o	CONNECTOR ASSY, OPT
803	⚠ 1-443-820-11	s	TRANSFORMER, POWER
804	⚠ 1-468-861-11	s	REGULATOR, SWITCHING
805	⚠ 1-533-514-31	s	BREAKER, CIRCUIT (for HDC1000(UCJ,J)/1100(J))
	⚠ 1-533-514-61	s	BREAKER, CIRCUIT (for HDC1000(CE))
806	⚠ 1-533-515-31	s	BREAKER, CIRCUIT (for HDC1000(UCJ,J)/1100(J))
	⚠ 1-533-515-61	s	BREAKER, CIRCUIT (for HDC1000(CE))
807	⚠ 1-570-173-11	s	SWITCH,VOLTAGE CHANGE
808	1-830-746-11	s	CABLE ASSEMBLY, ENCAPSULAT (M) (Made by LEMO)
	1-830-750-11	s	OPTICAL MULTI CABLE ASSEMBLY (Made by TAJIMI)
809	3-176-525-01	o	WASHER, SPRING (ST)
810	3-364-941-01	s	SCREW (+B) (2.6X5),NYLOK
811	3-602-404-02	s	HOUSING, CONECTOR
812	3-602-460-03	o	SHAFT, CONNECTOR
813	3-602-461-01	o	NUT, CONNECTOR
814	3-602-464-01	o	WASHER, CONDUCTIVE
815	3-602-491-01	o	PLATE,FIBER
816	3-725-907-01	s	BUSHING,BLIND
817	4-644-493-11	s	SCREW(M2.6X4), LOCK ACE
	7-623-923-01	s	WASHER,POLYETHYLENE 2.6
	7-627-556-77	s	SCREW,PRECISION +P2.6X6 TYPE 1
	7-682-248-04	s	SCREW +K 3X8
	7-682-548-04	s	SCREW +B3X8
	7-682-549-09	s	SCREW +B 3X10
	7-682-903-01	s	SCREW +PWH 3X5
	7-682-947-01	s	SCREW +PSW 3X6
	7-682-961-01	s	SCREW +PSW 4X8
	7-685-534-14	s	SCREW +BTP2.6X8

※:「1−6. 部品交換時の注意事項」を参照してください。
※: Refer to Section 1-6, “Note for Replacing Parts”.

1-2-2. HDC1500/1550/1580/1600

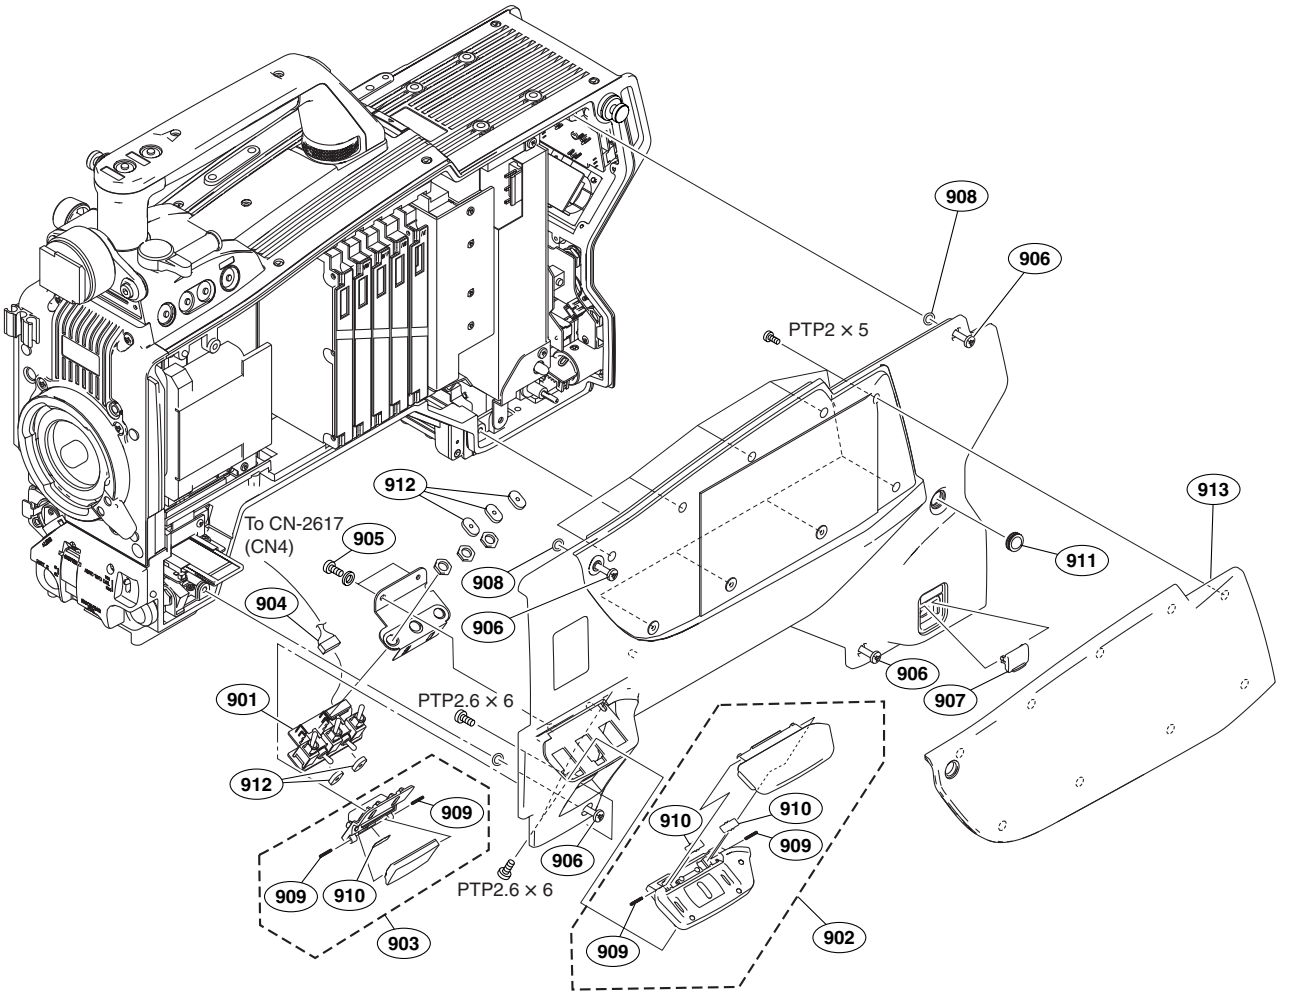


No.	Part No.	SP	Description
901	A-1099-128-A	s	MOUNTED CIRCUIT BOARD, SW-1240
902	A-1128-451-A	s	INSIDE SWITCHCOVER ASSY
903	A-1128-452-A	s	MS COVER ASSY
904	1-963-916-11	s	HARNESS, SUB (INSIDE SW)
905	3-364-941-11	s	SCREW (+B 2.6X5),NYLOK (STEEL)
906	3-603-680-02	s	STAINLESS SCREW +B3X12
907	3-612-669-01	o	LID,POWER SW
908	3-672-250-01	s	RING(M2.6),O (RBR)
909	3-703-575-11	s	PIN PARALLEL (1.2X8)
910	3-742-066-11	s	SPRING, SHUTTER
911	3-857-347-01	s	CALL COVER
912	3-872-587-01	s	CUSHION,TOGGLE-SW
913	3-872-610-01	s	PAD
	7-685-103-19	s	SCREW +PTP 2X5
	7-685-133-19	s	SCREW +PTP2.6X6(EP-FE/ZNBK)

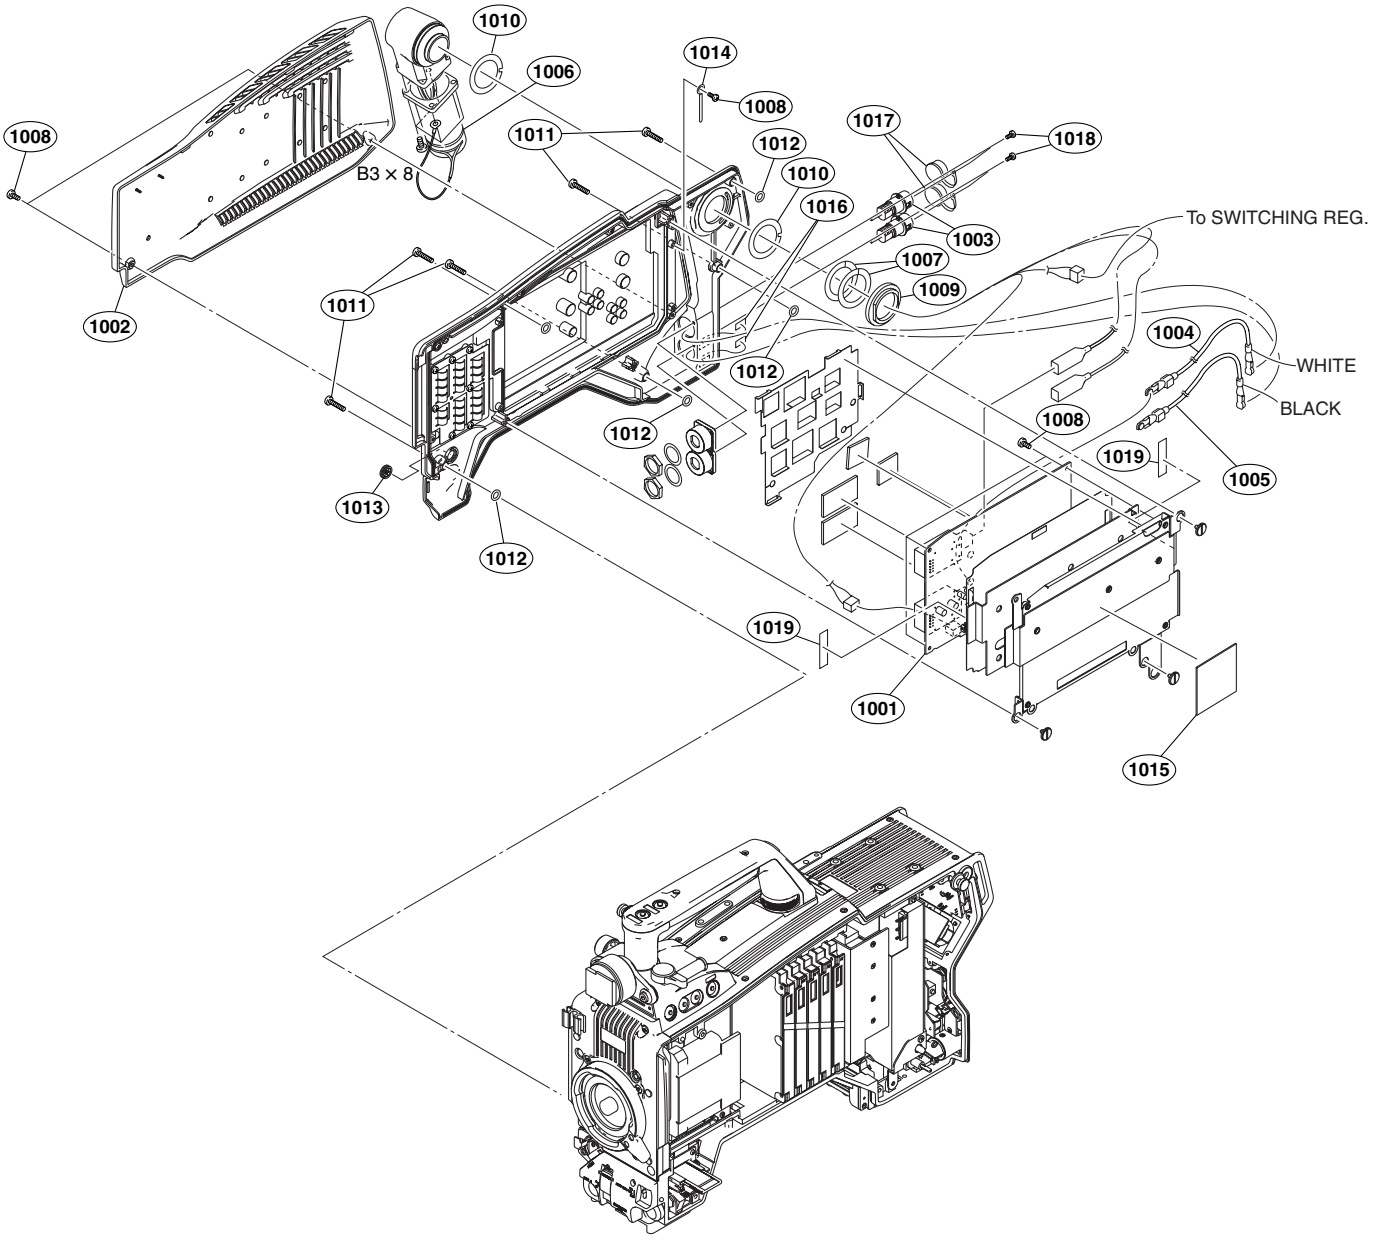


No.	Part No.	SP	Description
1001	A-1099-252-A	s	MOUNTED CIRCUIT BOARD, SDI-84 (HDC1500/1600)
	A-1179-311-A	s	MOUNTED CIRCUIT BOARD, SDI-84C (HDC1580)
1002	A-1128-449-A	s	OUTSIDE PAD SUBASSY
1003	1-784-240-11	s	CONVERTER, COAXIAL CONNECTOR (HDC1500/1600)
1004	1-829-055-11	s	CABLE ASSEMBLY, COAXIAL (HDC1500/1600)
1005	1-830-737-11	s	CABLE ASSEMBLY, COAXIAL (HDC1500/1600)
1006	1-830-745-11	s	CABLE ASSEMBLY, ENCAPSULAT (M) (Made by LEMO)
	1-830-751-11	s	OPTICAL MULTI CABLE ASSEMBLY (Made by TAJIMI)
1007	3-176-525-01	o	WASHER, SPRING (ST)
1008	3-364-941-01	s	SCREW (+B) (2.6X5),NYLOK
1009	3-602-461-01	o	NUT, CONNECTOR
1010	3-602-464-01	o	WASHER, CONDUCTIVE

No.	Part No.	SP	Description
1011	3-603-680-01	s	STAINLESS SCREW +B3X12
1012	3-672-250-00	s	RING(M2.6),O (RBR)
1013	3-676-244-21	s	COVER,SWITCH
1014	3-701-822-00	s	HOLDER, WIRE
1015	3-872-605-02	s	SHEET,DPR THERMAL
1016	3-872-608-02	s	LABEL(BNC)
1017	3-872-935-01	s	CAP,BNC
1018	4-654-273-02	s	ACE (M2), LOCK
1019	3-872-571-01	s	SHEET(1),SDI THERMAL
	7-682-548-09	s	SCREW +B 3X8

Outside Panel (HDC1550)

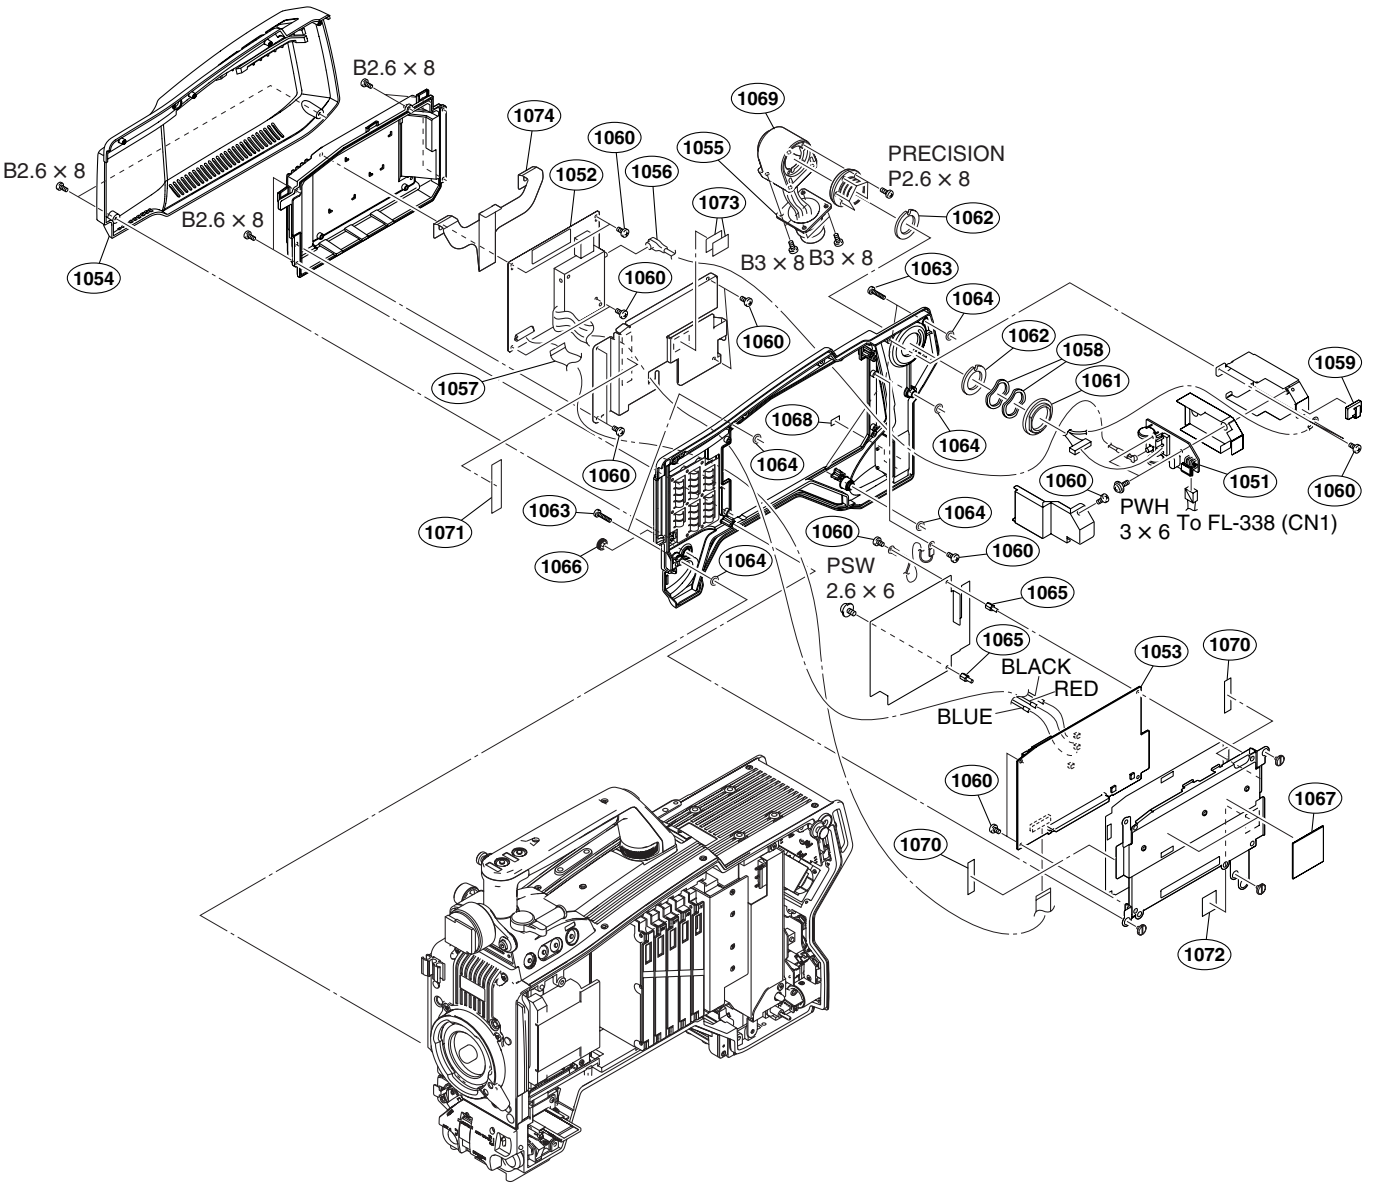


No.	Part No.	SP	Description
1051	A-1142-713-A	s	MOUNTED CIRCUIT BOARD, FL-337
1052	A-1142-714-A	s	MOUNTED CIRCUIT BOARD, MX-109
1053	A-1142-715-A	s	MOUNTED CIRCUIT BOARD, TR-136
1054	A-1154-374-A	s	OUT SIDE PAD SUB ASSY
1055	⚠ A-1154-376-A	s	TRIAX(UC)ASSY (HDC1550(UC))
	⚠ A-1154-609-A	s	TRIAX(CE)ASSY (HDC1550(CE))
1056	1-830-709-11	s	CABLE, CONNECTOR WITH COAXIAL
1057	1-831-010-11	s	CABLE, FLEXIBLE FLAT (16 CORE)
1058	3-176-525-01	o	WASHER, SPRING (ST)
1059	3-257-200-01	s	CLAMP, CORD
1060	3-364-941-01	s	SCREW (+B) (2.6X5),NYLOK
1061	3-602-461-01	o	NUT, CONNECTOR
1062	3-602-464-01	o	WASHER, CONDUCTIVE
1063	3-603-680-02	s	STAINLESS SCREW +B3X12
1064	3-672-250-01	s	RING (M2.6), O
1065	3-673-910-02	s	SCREW, CONNECTOR
1066	3-676-244-21	s	COVER,SWITCH
1067	3-872-605-02	s	SHEET,DPR THERMAL
1068	3-872-608-02	s	LABEL(BNC)
1069	3-990-318-01	s	BOX,TRIAX
1070	3-872-571-01	s	SHEET(1),SDI THERMAL
1071	3-990-317-02	s	SHEET,AUDIO THERMAL
1072	3-990-320-01	s	SHEET,TR THERMAL
1073	3-990-321-02	s	SHEET,MX THERMAL
1074	3-990-332-02	s	HINGE,MX
	7-621-759-45	s	SCREW +PSW, 2.6X6
	7-621-775-40	s	SCREW +B 2.6X8
	7-627-556-98	s	SCREW,PRECISION +P 2.6X8 TYPE1
	7-682-548-04	s	SCREW +B 3X8
	7-682-903-11	s	SCREW +PWH 3X6

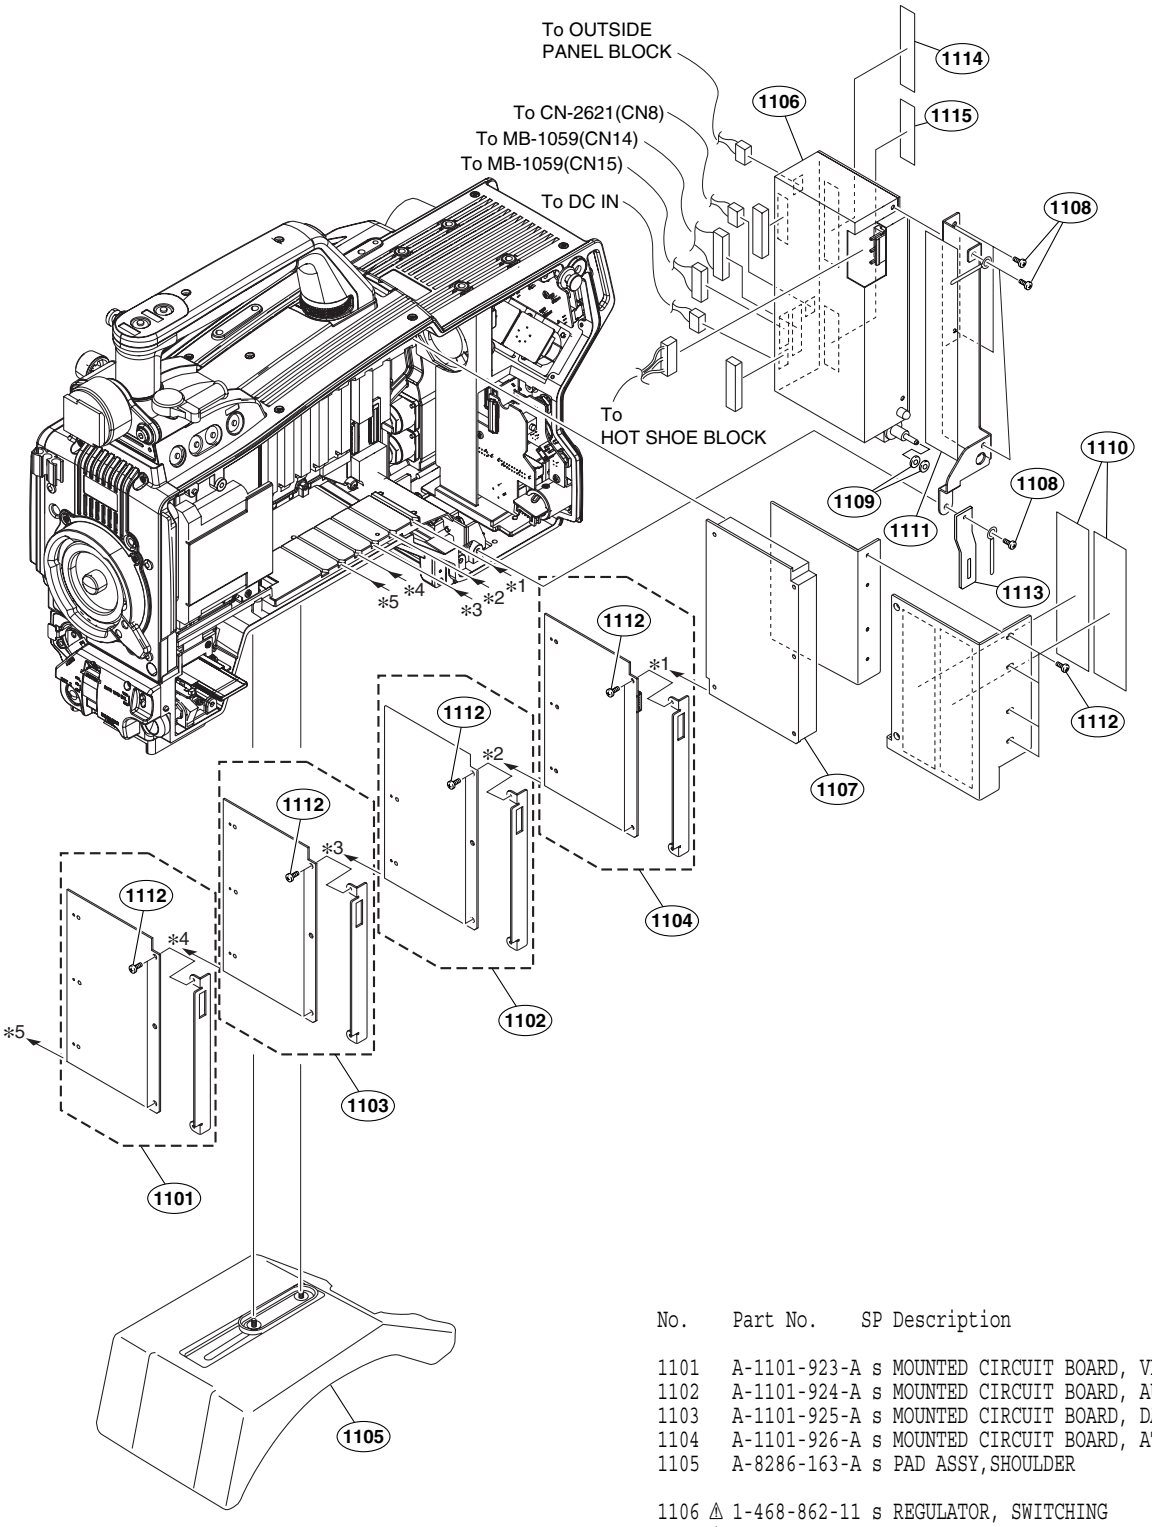


No.	Part No.	SP	Description
1101	A-1101-923-A	s	MOUNTED CIRCUIT BOARD, VDA-63
1102	A-1101-924-A	s	MOUNTED CIRCUIT BOARD, AU-298
1103	A-1101-925-A	s	MOUNTED CIRCUIT BOARD, DAP-33
1104	A-1101-926-A	s	MOUNTED CIRCUIT BOARD, AT-163
1105	A-8286-163-A	s	PAD ASSY,SHOULDER
1106 ⚠	1-468-862-11	s	REGULATOR, SWITCHING
1107 ⚠	1-478-790-11	s	CONVERTER UNIT, DC-DC
1108	3-364-941-01	s	SCREW (+B) (2.6X5),NYLOK
1109	3-872-590-01	s	PORONSHEET(POWER)
1110	3-872-620-01	s	THERMATTACH TAPE(DD)
1111	3-872-621-01	s	THERMATTACH TAPE(AC/DC)
1112	4-654-273-02	s	ACE (M2), LOCK
1113	3-986-535-03	s	BAND,HANGING(REAR)
1114	3-986-640-01	s	SHEET,HEAT TRANS(DENGEN UPPER)
1115	3-986-641-01	s	SHEET,HEAT TRANS(DENGEN LOWER)

Board Block (HDC1550)

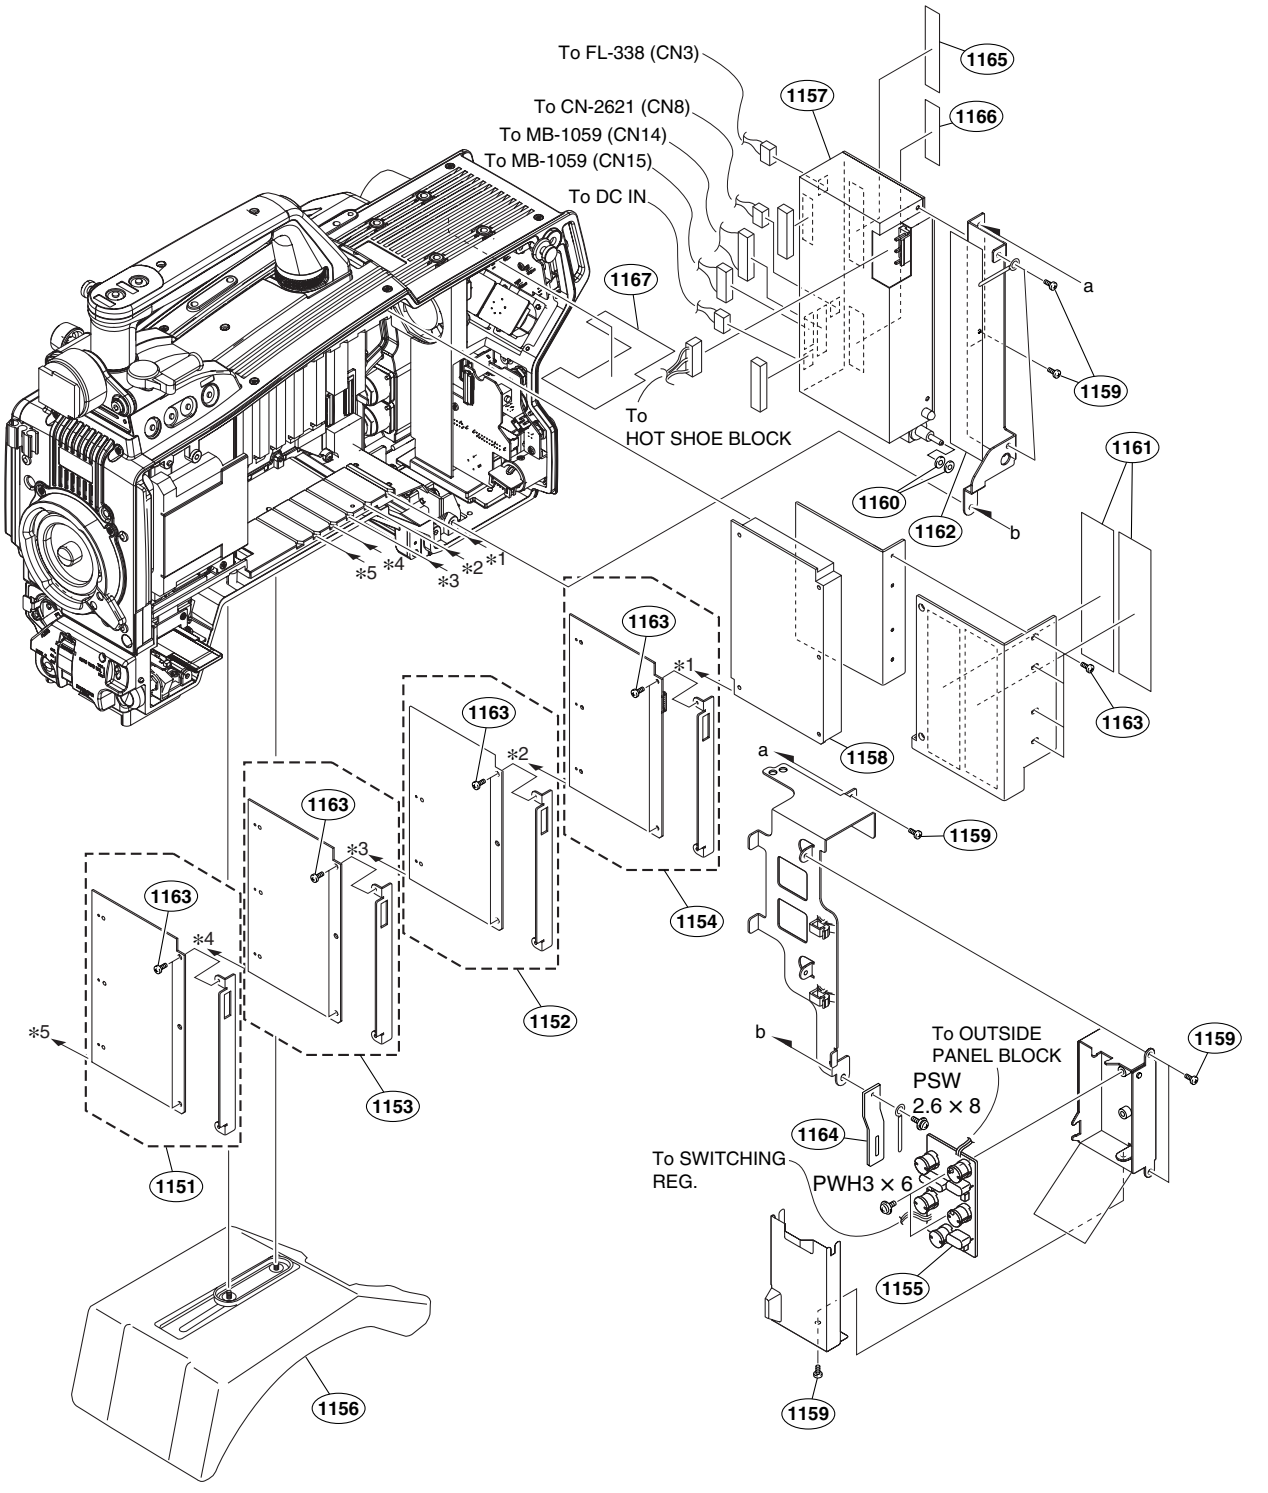

No.	Part No.	SP	Description
1151	A-1101-923-A	s	MOUNTED CIRCUIT BOARD, VDA-63
1152	A-1101-924-A	s	MOUNTED CIRCUIT BOARD, AU-298
1153	A-1101-925-A	s	MOUNTED CIRCUIT BOARD, DAP-33
1154	A-1101-926-A	s	MOUNTED CIRCUIT BOARD, AT-163
1155	A-1144-417-A	s	MOUNTED CIRCUIT BOARD, FL-338
1156	A-8286-163-A	s	PAD ASSY,SHOULDER
1157 ⚠	1-468-862-11	s	REGULATOR, SWITCHING
1158 ⚠	1-478-790-11	s	CONVERTER UNIT, DC-DC
1159	3-364-941-01	s	SCREW (+B) (2.6X5),NYLOK
1160	3-872-590-01	s	PORONSHEET(POWER)
1161	3-872-620-01	s	THERMATTACH TAPE(DD)
1162	3-872-621-01	s	THERMATTACH TAPE(AC/DC)
1163	4-654-273-02	s	ACE (M2), LOCK
1164	3-986-535-03	s	BAND,HANGING(REAR)
1165	3-986-640-01	s	SHEET,HEAT TRANS(DENGEN UPPER)
1166	3-986-641-01	s	SHEET,HEAT TRANS(DENGEN LOWER)
1167	3-990-319-01	s	SHEET,PROTECTION
	7-621-759-65	s	+PSW, 2.6X8
	7-682-903-11	s	SCREW +PWH 3X6

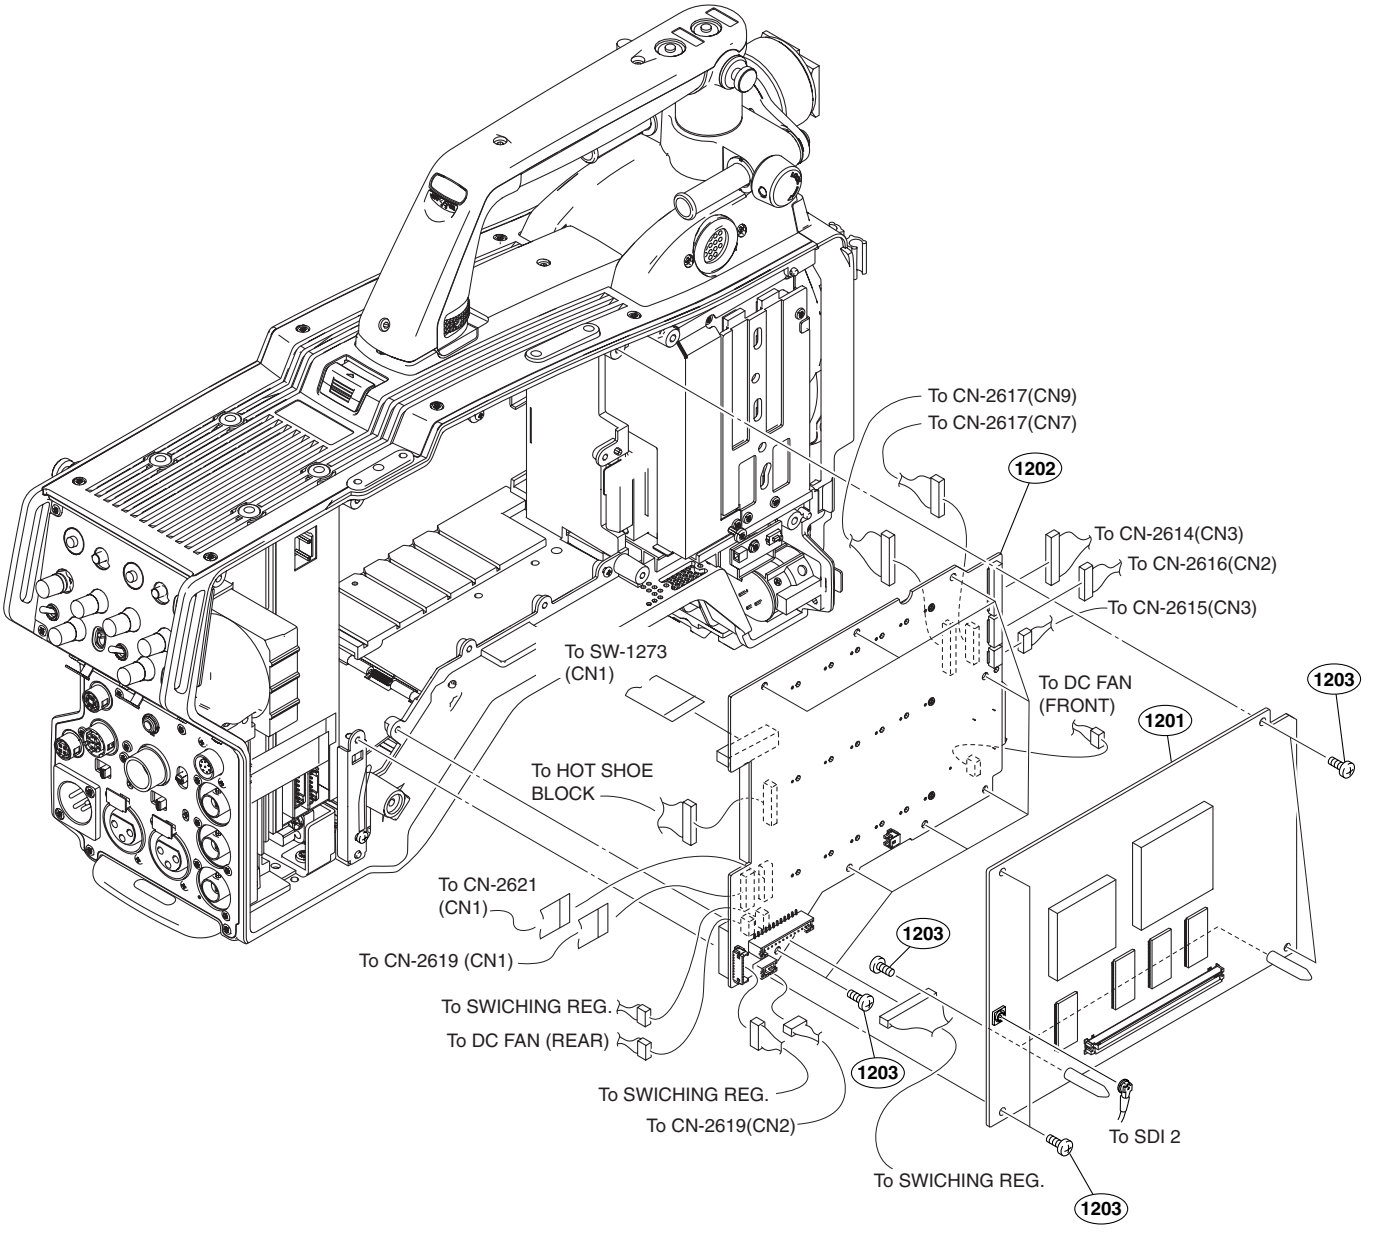


No. Part No. SP Description

1201 A-1101-927-A s MOUNTED CIRCUIT BOARD, DPR-265 (HDC1500/1600)
A-1179-310-A s MOUNTED CIRCUIT BOARD, DPR-265C (HDC1580)
1202 ✻ A-1159-988-A s MOUNTED CIRCUIT BOARD, MB-1059G (GOLD) (HDC1500/1580/1600)
✻ A-1101-928-A s MOUNTED CIRCUIT BOARD, MB-1059 (SILVER) (HDC1500/1600)
1203 3-364-941-01 s SCREW (+B) (2.6X5),NYLOK


✻:「1−6. 部品交換時の注意事項」を参照してください。
✻: Refer to Section 1-6, “Note for Replacing Parts”.

Mother Board Block (HDC1550)

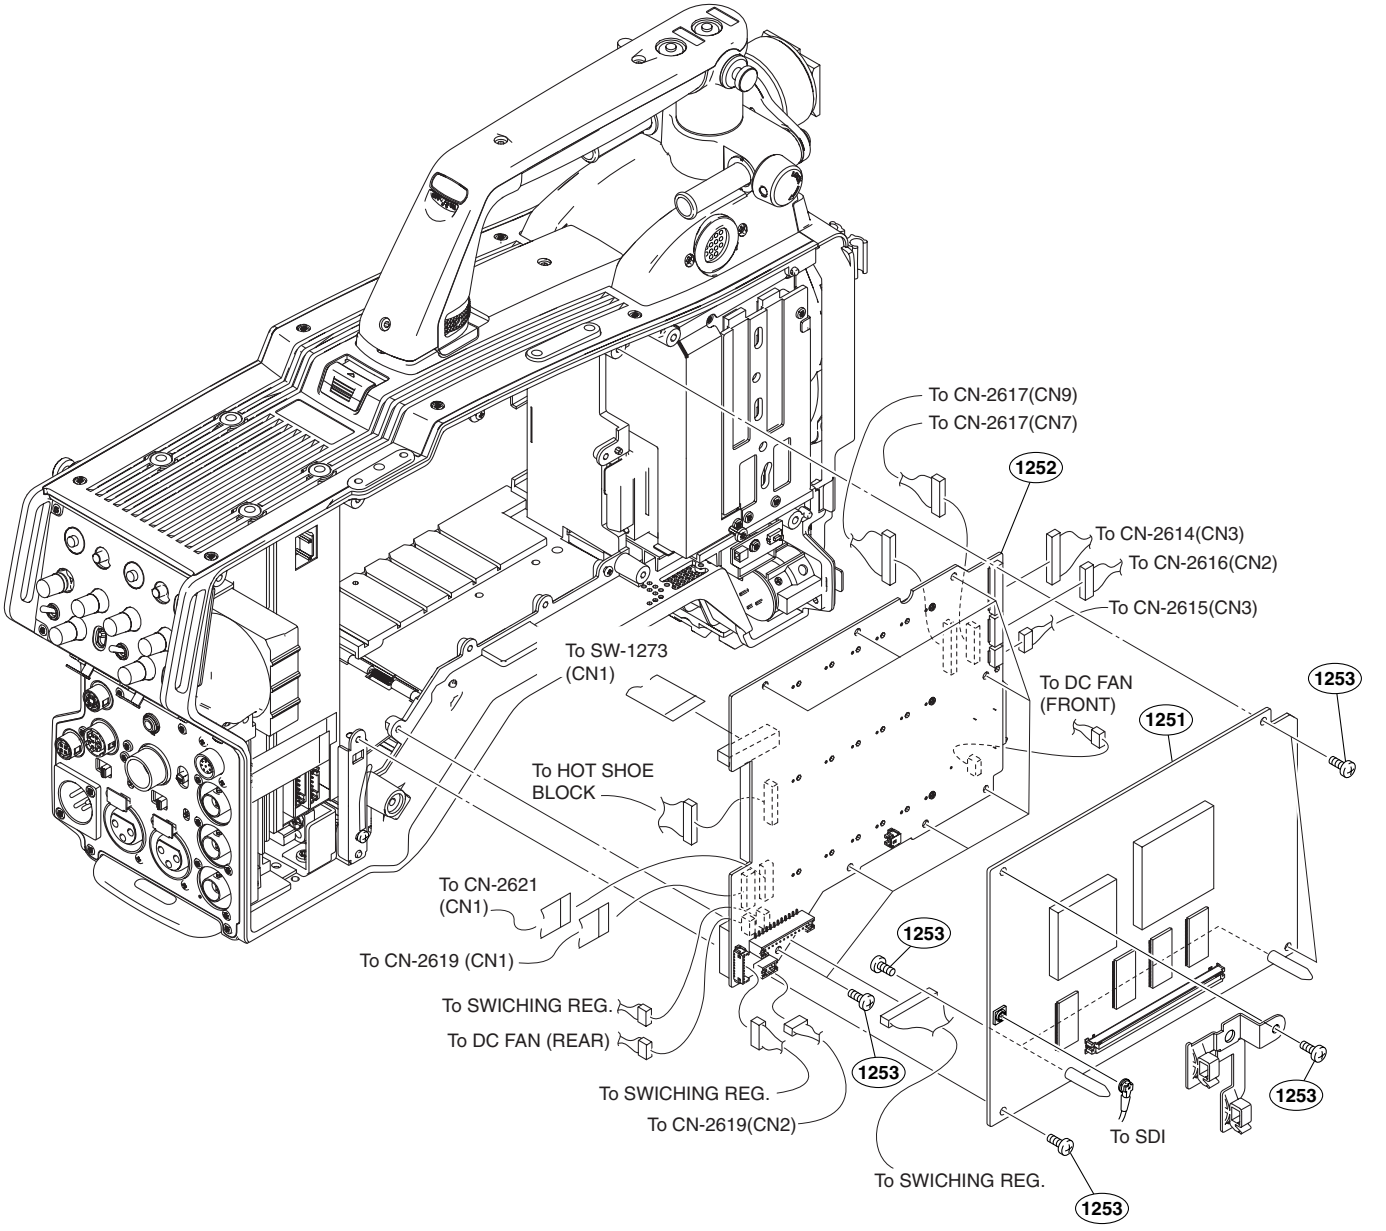


No.	Part No.	SP	Description
1251	A-1101-927-A	s	MOUNTED CIRCUIT BOARD, DPR-265
1252	✻ A-1159-988-A	s	MOUNTED CIRCUIT BOARD, MB-1059G (GOLD)
	✻ A-1101-928-A	s	MOUNTED CIRCUIT BOARD, MB-1059 (SILVER)
1253	3-364-941-01	s	SCREW (+B) (2.6X5),NYLOK

✻:「1−6. 部品交換時の注意事項」を参照してください。
✻: Refer to Section 1-6, “Note for Replacing Parts”.

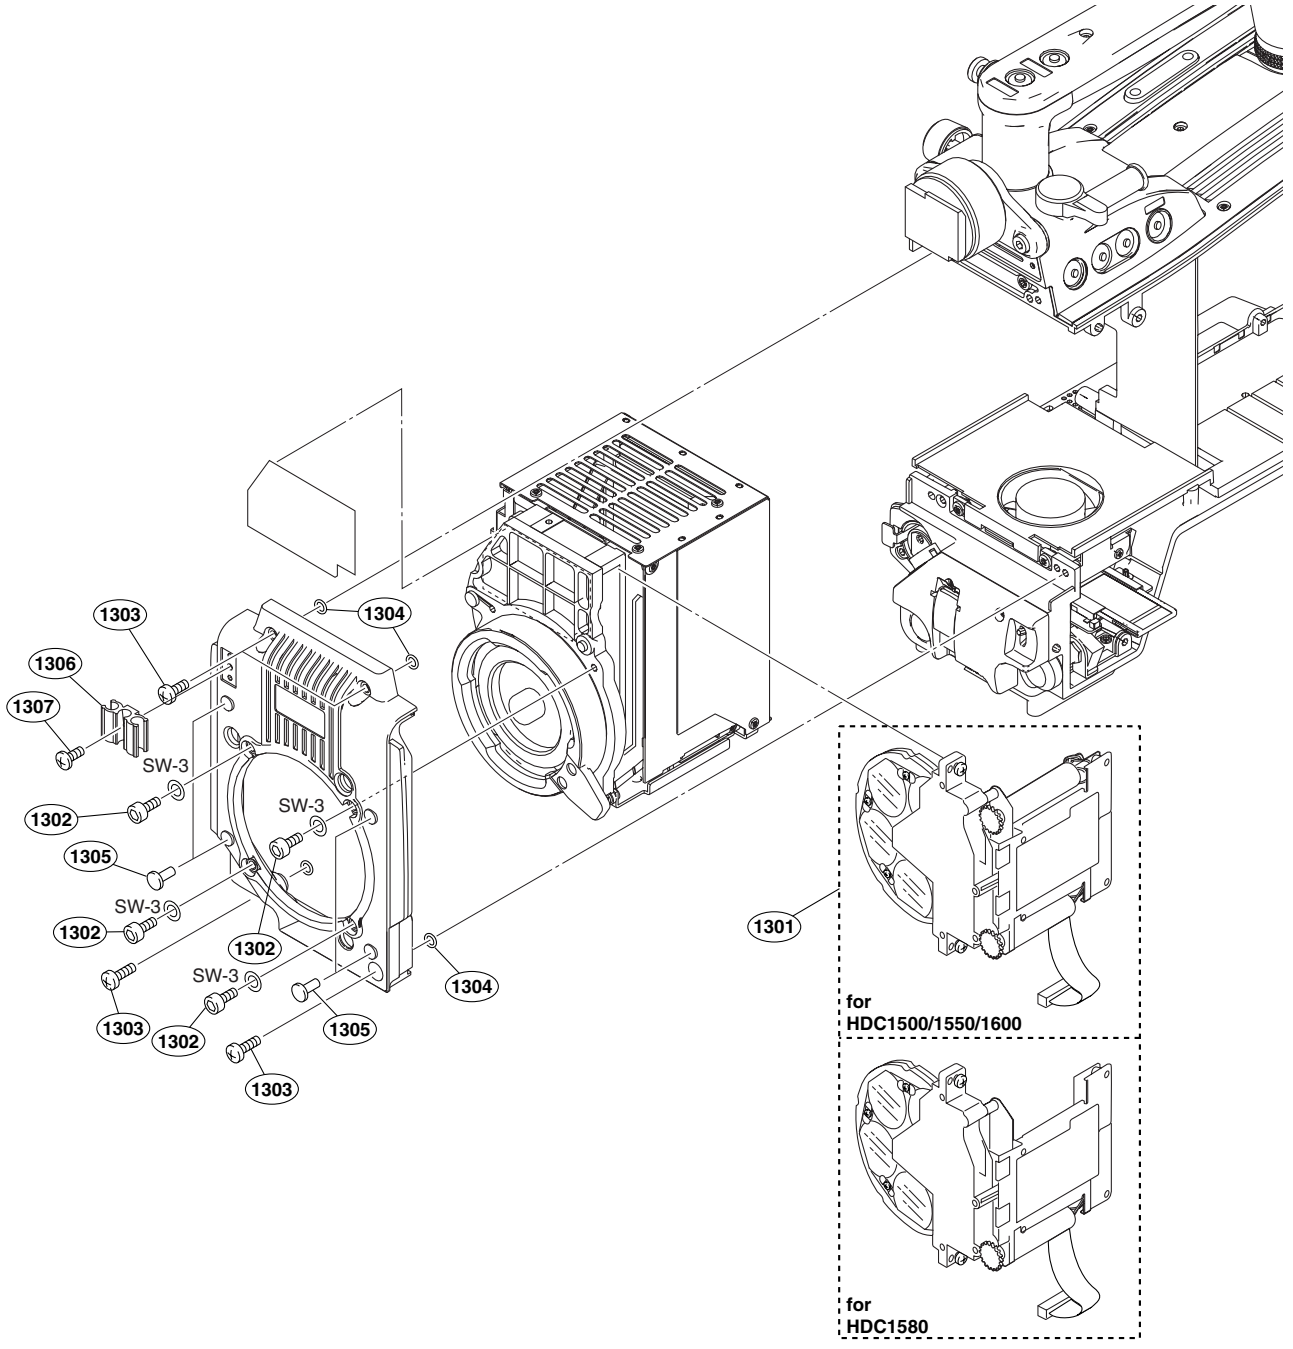

No.	Part No.	SP	Description	
1301	1-788-329-12	s	DISK UNIT, FILTER (HDC1500/1550/1600)	
	1-479-728-11	s	DISK UNIT, FILTER (HDC1580)	
1302	2-623-773-11	s	BOLT (M3X8),STAINLESS	
1303	3-603-679-02	s	STAINLESS SCREW +B3X10	
1304	3-672-250-01	s	RING(M2.6),O	(RBR)
1305	3-673-018-11	s	SCREW, BLIND	(PLA)
1306	3-679-659-04	o	CLAMP,CABLE	(PP)
1307	3-694-181-03	s	TYPE1,AROCK PRECISION +P2.6X5	
	7-623-208-22	s	SPRING WASHER (3MM)	


CCD Unit (HDC1500/1550/1580/1600)

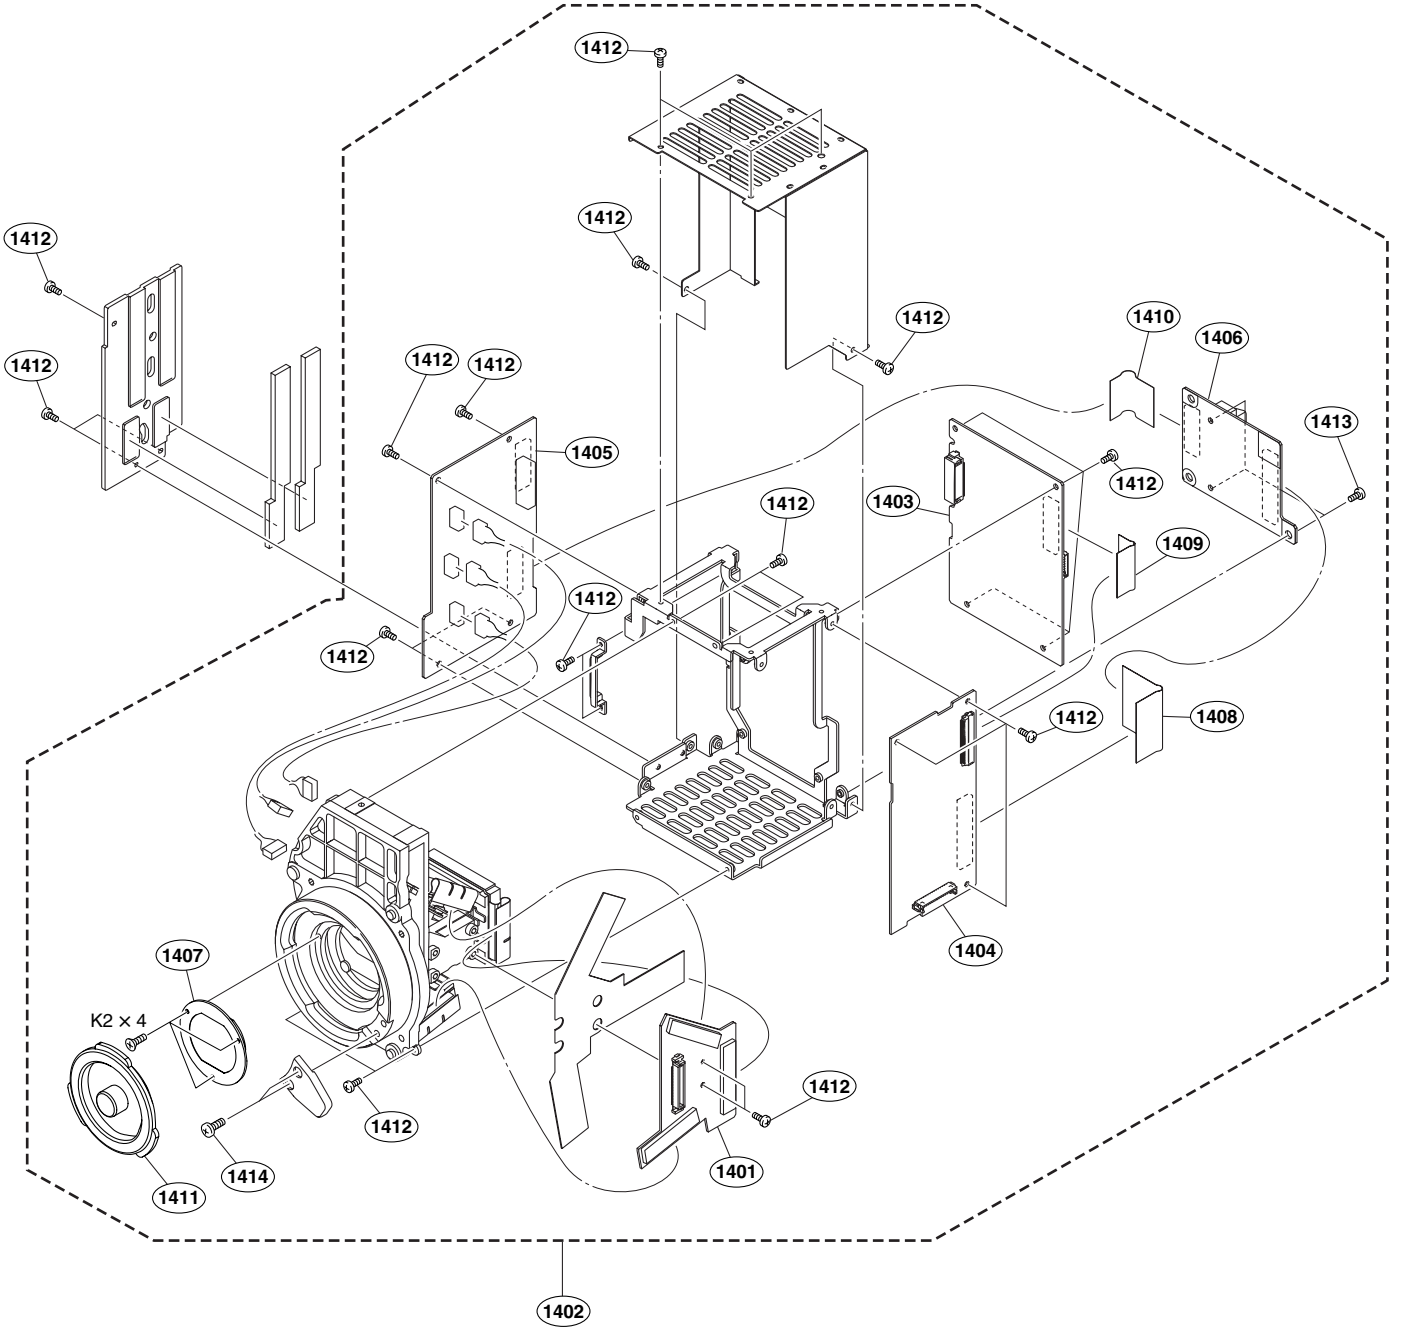

No.	Part No.	SP	Description
1401	A-1099-261-A	s	MOUNTED CIRCUIT BOARD, CN-2578 (for HDC1500/1550/1580)
	A-1099-206-A	s	MOUNTED CIRCUIT BOARD, CN-2712 (for HDC1600)
1402	A-1153-996-A	s	CCD UNIT 1000HDC (for HDC1500/1550)
	A-1212-220-A	s	CCD UNIT 1580 (HDC1580)
	A-1153-997-A	s	CCD UNIT 1100HDC (for HDC1600)
1403 ※	A-1159-980-A	s	MOUNTED CIRCUIT BOARD, TG-243G (GOLD) (for HDC1500/1550)
※	A-1101-922-A	s	MOUNTED CIRCUIT BOARD, TG-243 (SILVER) (for HDC1500/1550)
	A-1179-309-A	s	MOUNTED CIRCUIT BOARD, TG-243CG (for HDC1580)
※	A-1159-992-A	s	MOUNTED CIRCUIT BOARD, TG-247G (GOLD) (for HDC1600)
※	A-1126-983-A	s	MOUNTED CIRCUIT BOARD, TG-247 (SILVER) (for HDC1600)
1404 ※	A-1159-981-A	s	MOUNTED CIRCUIT BOARD, DR-528G (GOLD) (for HDC1500/1550/1580)
※	A-1099-260-A	s	MOUNTED CIRCUIT BOARD, DR-528 (SILVER) (for HDC1500/1550)
※	A-1159-993-A	s	MOUNTED CIRCUIT BOARD, DR-562G (GOLD) (for HDC1600)
※	A-1099-205-A	s	MOUNTED CIRCUIT BOARD, DR-562 (SILVER) (for HDC1600)
1405 ※	A-1159-982-A	s	MOUNTED CIRCUIT BOARD, PA-317G (GOLD) (for HDC1500/1550)
※	A-1099-263-A	s	MOUNTED CIRCUIT BOARD, PA-317 (SILVER) (for HDC1500/1550)
	A-1175-915-A	s	MOUNTED CIRCUIT BOARD, PA-317CG (for HDC1580)
※	A-1159-994-A	s	MOUNTED CIRCUIT BOARD, PA-327G (GOLD) (for HDC1600)
※	A-1099-203-A	s	MOUNTED CIRCUIT BOARD, PA-327 (SILVER) (for HDC1600)
1406 ※	A-1159-983-A	s	MOUNTED CIRCUIT BOARD, CN-2579G (GOLD) (for HDC1500/1550/1580)
※	A-1099-262-A	s	MOUNTED CIRCUIT BOARD, CN-2579 (SILVER) (for HDC1500/1550)
※	A-1159-995-A	s	MOUNTED CIRCUIT BOARD, CN-2723G (GOLD) (for HDC1600)
※	A-1099-210-A	s	MOUNTED CIRCUIT BOARD, CN-2723 (SILVER) (for HDC1600)
1407	1-758-483-11	o	FILTER UNIT, OPTICAL
1408 ※	1-831-656-11	s	CABLE, FLEXIBLE FLAT (30 CORE) (GOLD)
※	1-830-735-11	s	CABLE, FLEXIBLE FLAT (30 CORE) (SILVER)
1409 ※	1-831-659-11	s	CABLE, FLEXIBLE FLAT (45 CORE) (GOLD) (for HDC1500/1550/1580)
※	1-830-484-11	s	CABLE, FLEXIBLE FLAT (45 CORE) (SILVER) (for HDC1500/1550)
※	1-831-660-11	s	CABLE, FLEXIBLE FLAT (50 CORE) (GOLD) (for HDC1600)
※	1-830-794-11	s	CABLE, FLEXIBLE FLAT (50 CORE) (SILVER) (for HDC1600)
1410 ※	1-831-658-11	s	CABLE, FLEXIBLE FLAT (40 CORE) (GOLD)
※	1-830-485-11	s	CABLE, FLEXIBLE FLAT (40 CORE) (SILVER)
1411	3-699-048-01	s	CAP,MOUNT
1412	3-729-076-11	s	SCREW +B2X4 (STEEL)
1413	3-965-077-01	s	SCREW, SPECIAL (M2)
1414	4-644-165-01	s	SCREW (M2.6X4),0 PLATE P1 MAIN
	7-627-452-28	s	SCREW,PRECISION +K 2X4


※:「1−6. 部品交換時の注意事項」を参照してください。
※: Refer to Section 1-6, “Note for Replacing Parts”.

Front Chassis Block (HDC1500/1550/1580/1600)

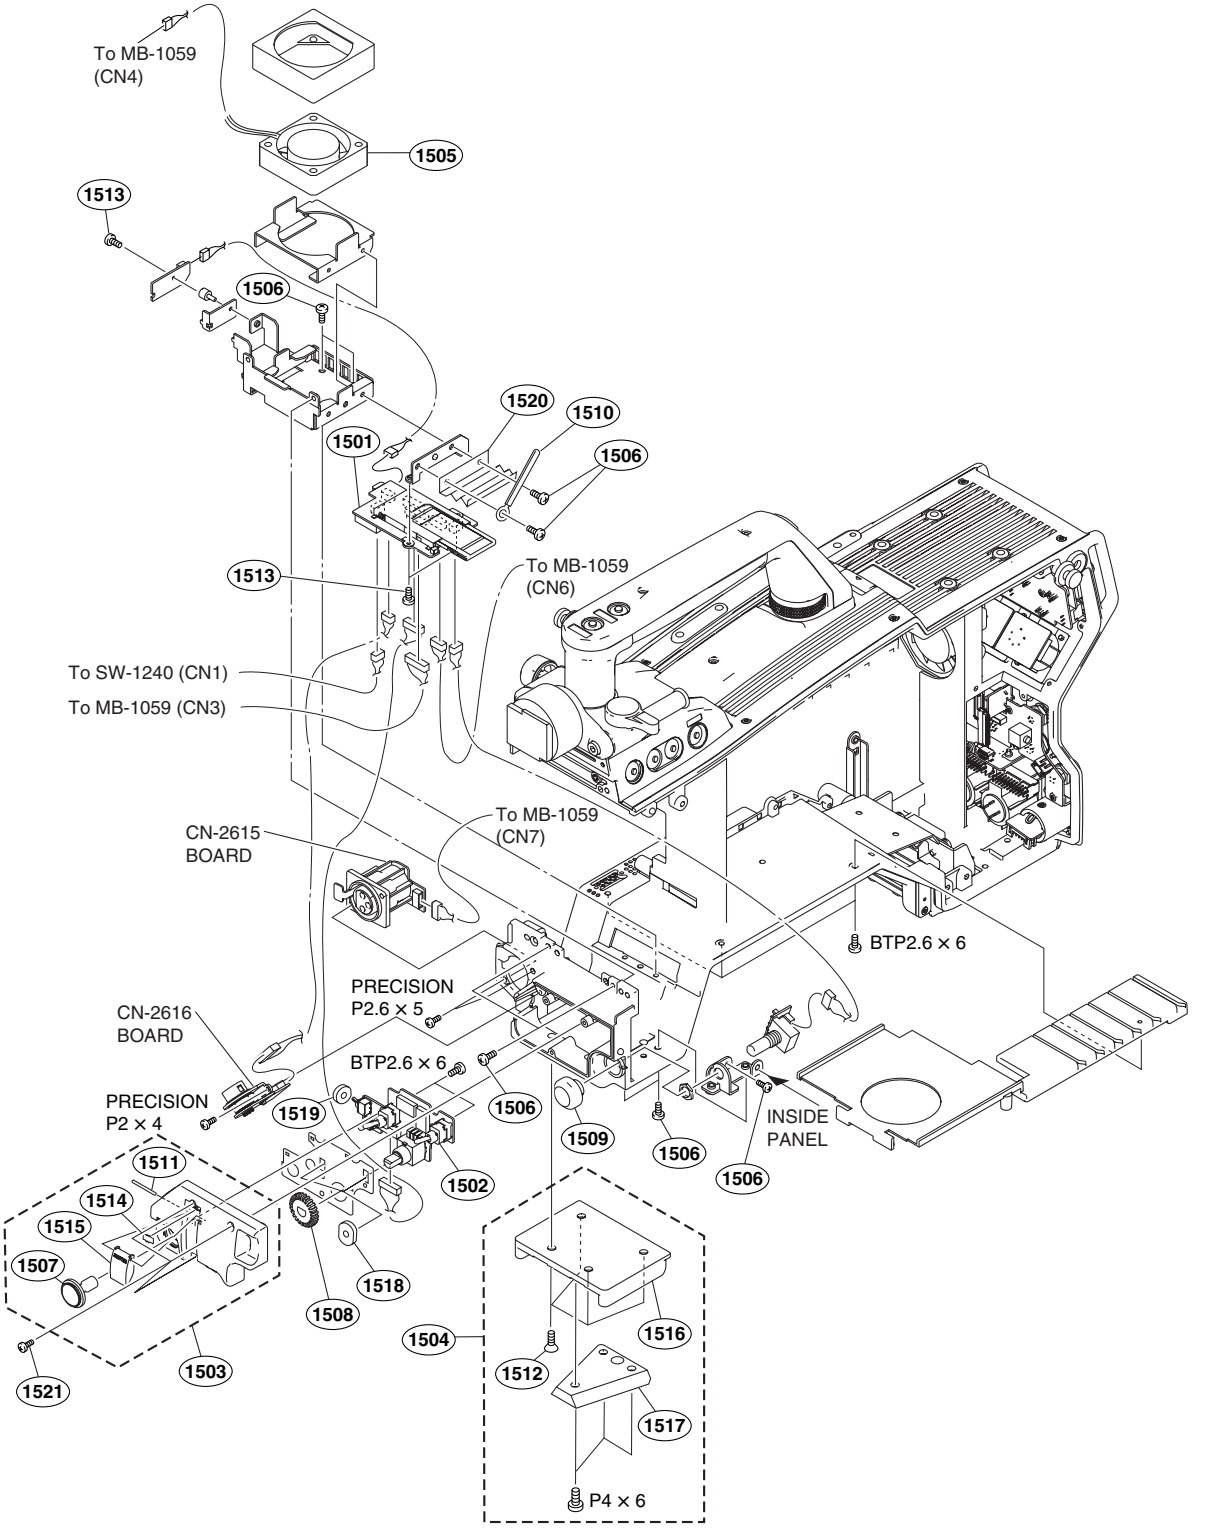

No.	Part No.	SP	Description
1501	A-1099-117-A	s	MOUNTED CIRCUIT BOARD, CN-2617
1502	A-1099-127-A	s	MOUNTED CIRCUIT BOARD, SW-1239
1503	A-1128-453-A	s	FRONT SWITCHCOVER ASSY
1504	A-8279-993-B	s	SHOE(D)ASSY,V
1505	1-787-070-11	s	FAN, DC (41 SQUARE)
1506	3-364-941-01	s	SCREW (+B) (2.6X5),NYLOK
1507	3-679-668-01	s	BUTTON,VTR START
1508	3-679-679-04	s	KNOB, VR (AUDIO)
1509	3-692-111-02	s	KNOB,RE
1510	3-701-822-01	s	HOLDER, WIRE
1511	3-703-357-08	s	PIN (DIA 1.6SERISE) (STEEL)
1512	3-729-072-02	s	SCREW, +K (4X8)
1513	3-729-076-11	s	SCREW +B2X4 (STEEL)
1514	3-742-066-01	s	SPRING, SHUTTER
1515	3-742-067-05	s	LID, SHUTTER
1516	3-854-769-02	s	SHOE(D),CAMERA
1517	3-854-770-02	s	WEDGE(D),MOUNTING
1518	3-872-587-01	s	CUSHION,TOGGLE-SW
1519	3-872-601-01	s	TOGGLE SW CUSHION(C)
1520	3-986-534-02	s	BAND, HANGING (FRONT)
1521	4-654-273-02	s	ACE (M2), LOCK
	7-627-553-48	s	SCREW, +P2X4
	7-627-556-58	s	SCREW,PRECISION +P2.6X5
	7-682-160-09	s	SCREW +P4X6
	7-685-533-14	s	SCREW +BTP2.6X6


Handle Assembly (HDC1500/1550/1580/1600)

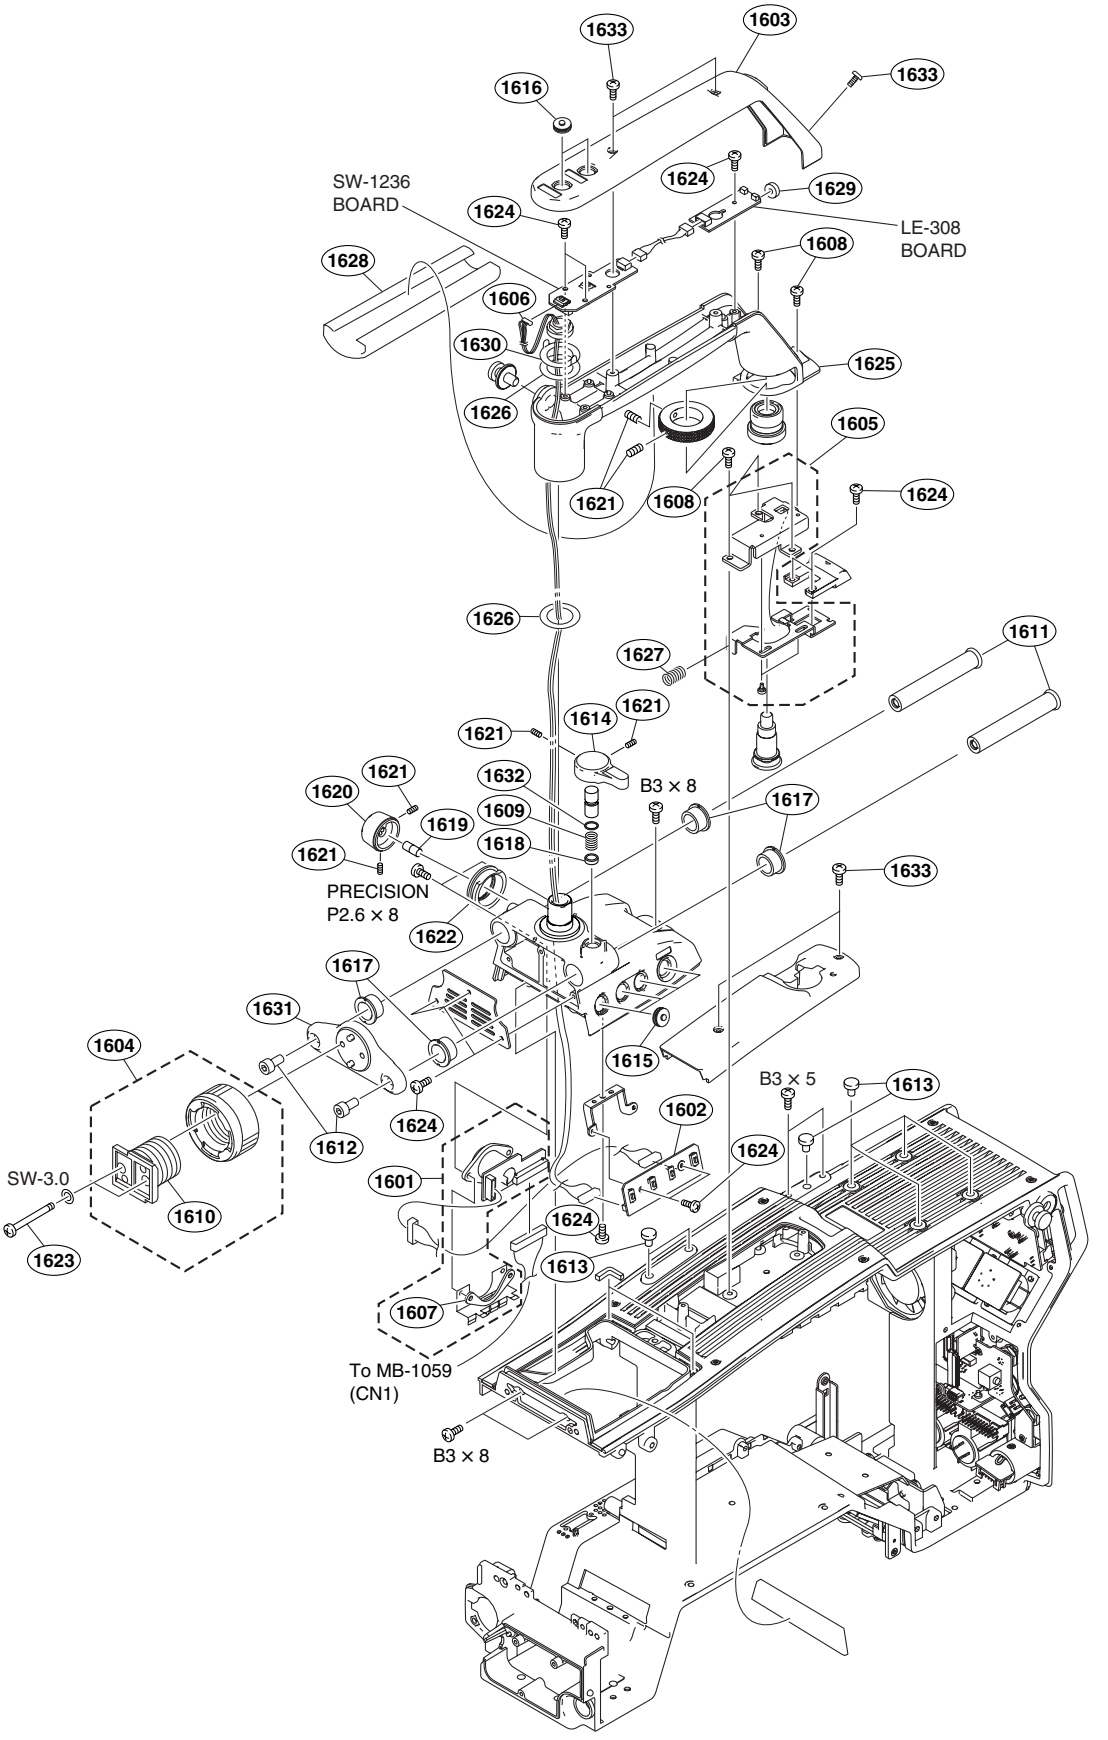

No.	Part No.	SP	Description
1601	A-1172-523-A	s	MOUNTED CIRCUIT BOARD, CN-2614B
1602	A-1099-125-A	s	MOUNTED CIRCUIT BOARD, SW-1237
1603	A-1128-447-A	s	HANDLE COVER ASSY
1604	A-8278-412-H	s	SHOE ASSY,VF
1605	X-3704-669-1	s	HANDLE JIKUUKE PLATE ASSY
1606	1-963-914-11	s	HARNESS, SUB (HANDLE SW)
1607	3-186-958-01	o	NUT (VF), PLATE
1608	3-364-941-01	s	SCREW (+B) (2.6X5),NYLOK
1609	3-612-822-01	s	SPRING,COMPRESSION
1610	3-627-853-06	s	SHOE,SLIDE
1611	3-628-261-01	s	PIPE,VF SLIDE
1612	3-657-705-91	s	BOLT (M4X8), HEXAGON HOLE
1613	3-673-018-11	s	SCREW, BLIND (PLA)
1614	3-673-046-03	s	LEVER, LOCK
1615	3-676-244-03	s	COVER, SWITCH
1616	3-676-244-21	s	COVER,SWITCH
1617	3-679-684-01	o	REST,ARM
1618	3-679-702-01	o	CUSHION,STOPPER(SLIDE ASSY)
1619	3-690-660-02	s	LOCK,SCREW
1620	3-690-674-02	s	KNOB,LOCK
1621	3-701-507-00	s	SET-SCREW,HEX 3X5 ST
1622	3-710-024-02	s	PACKING,VF
1623	3-711-765-01	s	BOLT(M3),HEXAGON SOCKET(STEEL)
1624	3-729-076-11	s	SCREW +B2X4 (STEEL)
1625	3-872-532-02	s	HANDLE
1626	3-872-534-02	s	WASHER02
1627	3-872-543-01	s	SPRING,COMPRESSION(HANDLELOCK)
1628	3-872-563-01	s	SHEET,HANDLE
1629	3-872-601-01	s	TOGGLE SW CUSHION(C)
1630	3-872-609-02	s	WASHER01
1631	3-872-615-01	s	PLATE,VF SLIDE (Normal Type)
	3-872-542-01	s	PLATE,VF SLIDE(LONG) (Long Type)
1632	3-895-622-01	s	RING (DIA. 5), O (NBR)
1633	4-654-273-02	s	ACE (M2), LOCK
	7-623-208-22	s	SPRING WASHER (3MM)
	7-627-556-98	s	SCREW,PRECISION +P 2.6X8 TYPE1
	7-682-548-09	s	SCREW +B 3X8
	7-685-549-09	s	SCREW +B 3X5

Intercom Panel Block (HDC1500/1550/1580/1600)

For HDC1500 (CE)/HDC1550 (CE) only

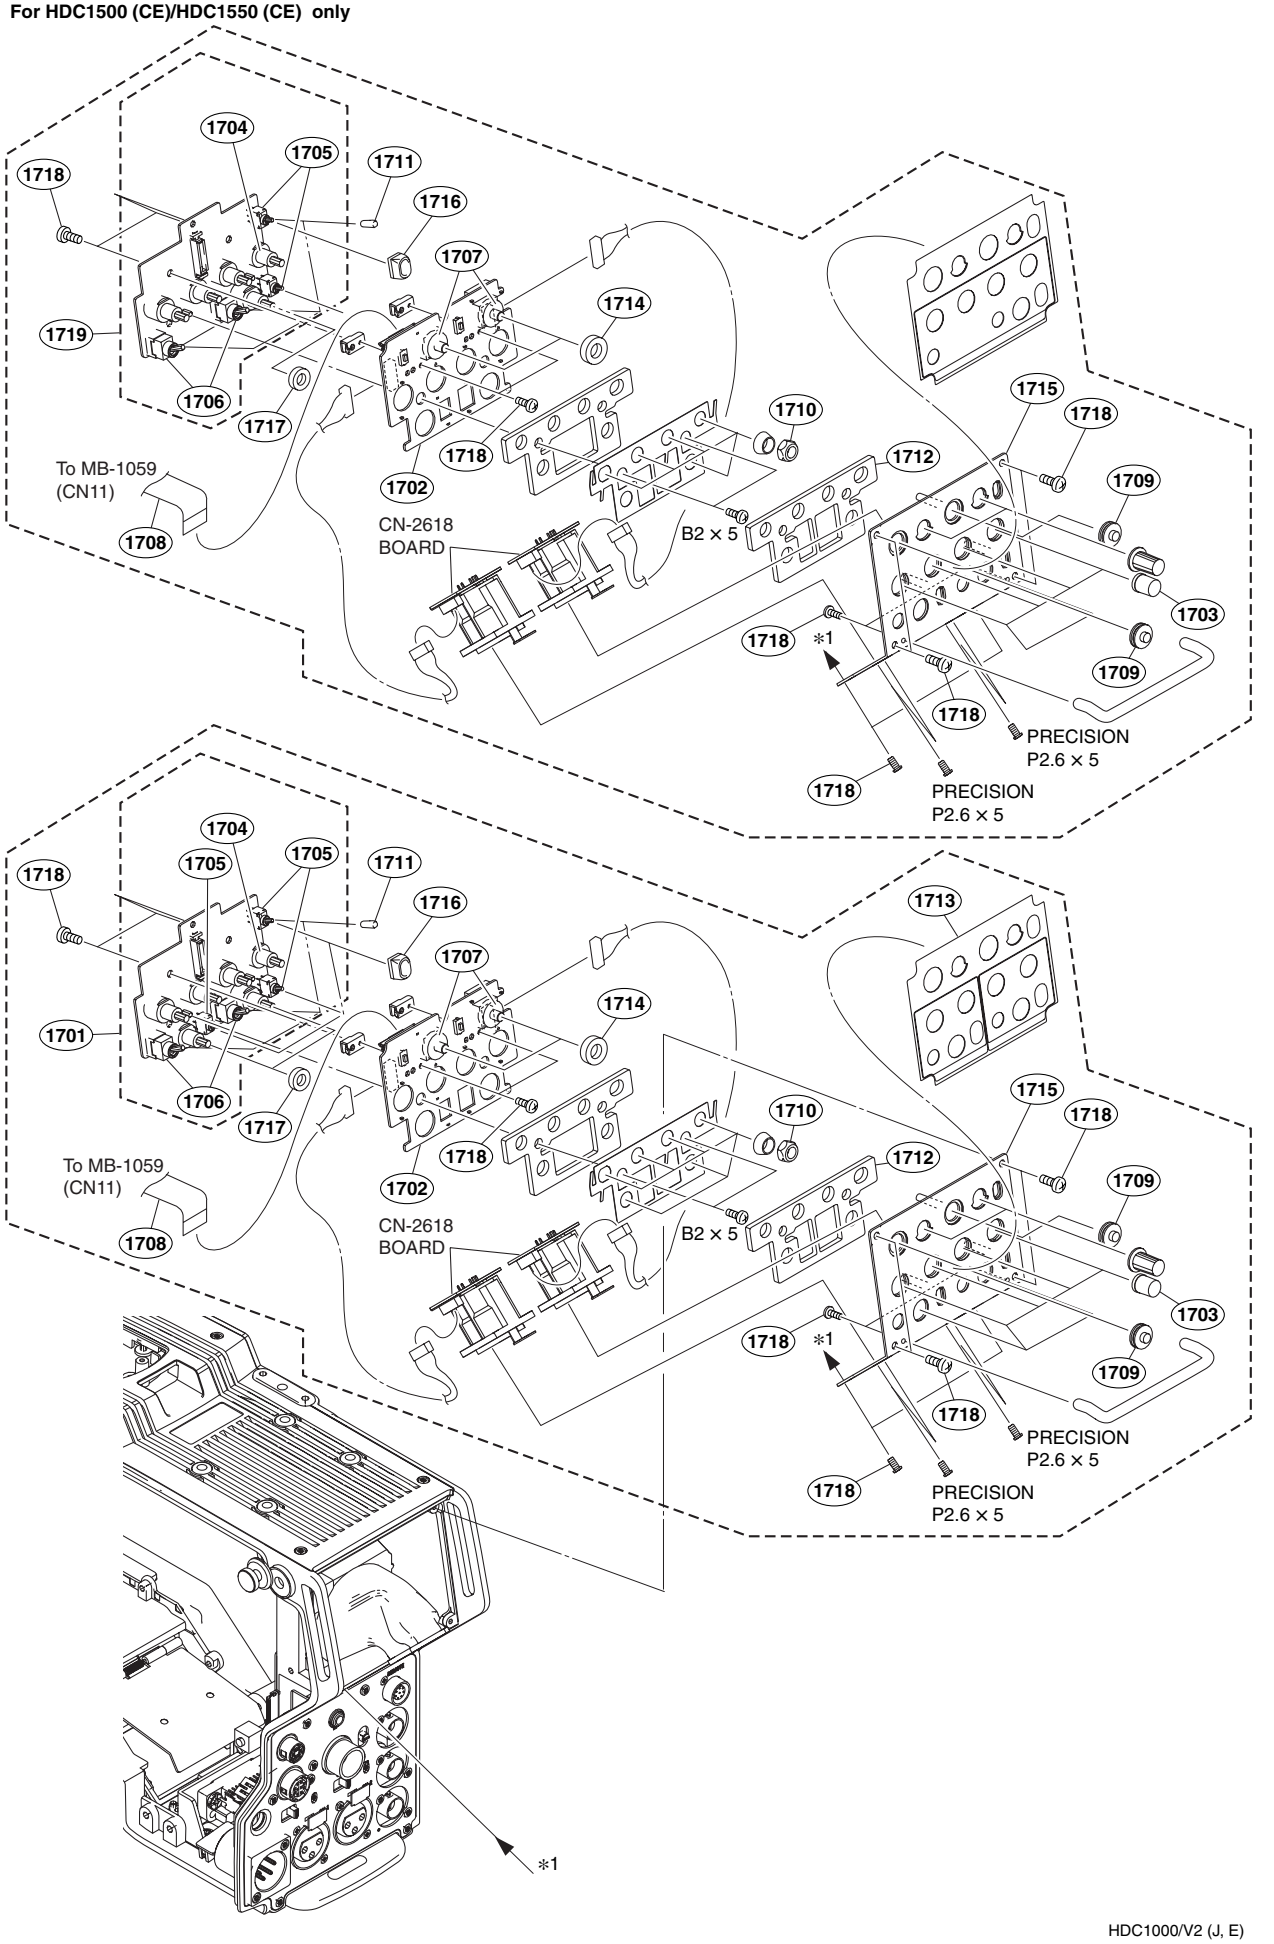


No.	Part No.	SP	Description
1701	A-1099-129-A	s	MOUNTED CIRCUIT BOARD, SW-1241 (HDC1500(SY,J)/1550(UC)/1000(J))
	A-1166-843-A	s	MOUNTED CIRCUIT BOARD, SW-1241B (HDC1500(CE)/1550(CE)/1580(CN))
1702 ※	A-1159-986-A	s	MOUNTED CIRCUIT BOARD, SW-1273G (GOLD)
※	A-1099-356-A	s	MOUNTED CIRCUIT BOARD, SW-1273 (SILVER)
1703	X-3604-579-2	s	VOLUME KNOB ASSY
1704	1-238-294-11	s	RESISTOR, VAR,CARBON 100K
1705	1-570-608-11	s	SWITCH,TOGGLE
1706	1-570-985-11	s	SWITCH,TOGGLE
1707	1-786-887-11	s	SWITCH,ROTARY
1708 ※	1-831-661-11	s	CABLE, FLEXIBLE FLAT (36 CORE) (GOLD) (HDC1500/1550/1580/1600)
※	1-830-482-11	s	CABLE, FLEXIBLE FLAT (36 CORE) (SILVER) (HDC1500/1550/1600)
1709	3-676-244-21	s	COVER,SWITCH
1710	3-685-104-01	s	NUT(M6),CONTROL (STEEL)
1711	3-869-842-01	s	CAP,SW
1712	3-872-595-02	s	SHEET,BORON
1713	3-872-599-04	s	SHEET,REAR UPPER
1714	3-872-618-01	s	SHEET,BORON(RET SELECT)
1715	3-872-637-05	s	PANEL,INCOM
1716	3-903-660-01	s	DROP PROTECTION,TOGGLE
1717	3-986-536-01	s	SHEET,BORON(MIC SW)
1718	4-654-273-02	s	ACE (M2), LOCK
1719	A-1166-843-A	s	MOUNTED CIRCUIT BOARD, SW-1241B
	7-621-772-20	s	SCREW +B 2X5
	7-627-556-58	s	SCREW,PRECISION +P2.6X5

※:「1−6. 部品交換時の注意事項」を参照してください。

※: Refer to Section 1-6, “Note for Replacing Parts”.


MIC Panel Assembly (HDC1500/1550/1580/1600)

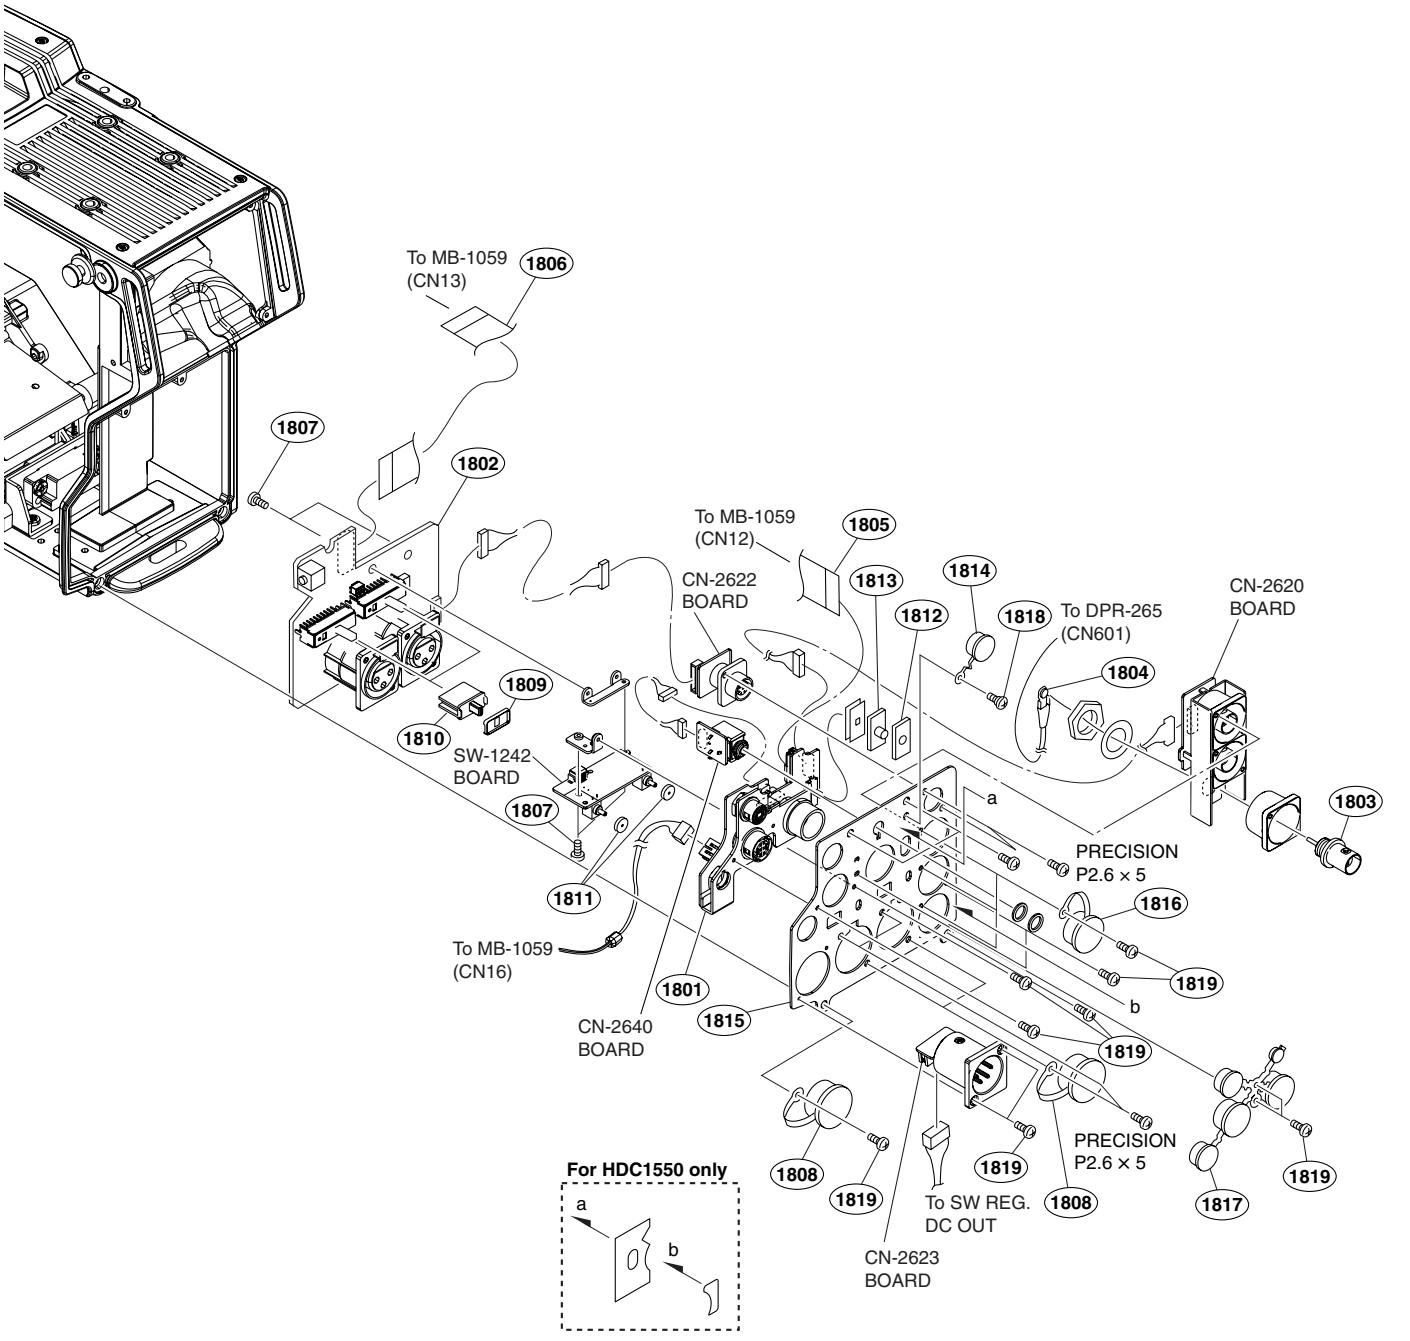

No.	Part No.	SP	Description
1801	※ A-1159-984-A	s	MOUNTED CIRCUIT BOARD, CN-2619G (GOLD) (HDC1500/1550/1580/1600)
	※ A-1099-119-A	s	MOUNTED CIRCUIT BOARD, CN-2619 (SILVER) (HDC1500/1550/1600)
1802	※ A-1159-985-A	s	MOUNTED CIRCUIT BOARD, CN-2621G (GOLD) (HDC1500/1550/1580/1600)
	※ A-1099-121-A	s	MOUNTED CIRCUIT BOARD, CN-2621 (SILVER) (HDC1500/1550/1600)
1803	1-784-240-11	s	CONVERTER, COAXIAL CONNECTOR (HDC1500/1550/1600)
1804	1-830-742-11	s	CABLE ASSEMBLY, COAXIAL (HDC1500/1550/1600)
1805	※ 1-831-662-11	s	CABLE, FLEXIBLE FLAT (40 CORE) (GOLD) (HDC1500/1550/1580/1600)
	※ 1-830-483-11	s	CABLE, FLEXIBLE FLAT (40 CORE) (SILVER) (HDC1500/1550/1600)
1806	※ 1-831-663-11	s	CABLE, FLEXIBLE FLAT (36 CORE) (GOLD) (HDC1500/1550/1580/1600)
	※ 1-830-752-11	s	CABLE, FLEXIBLE FLAT (36 CORE) (SILVER) (HDC1500/1550/1600)
1807	3-729-076-11	s	SCREW +B2X4 (STEEL)
1808	3-748-142-01	s	COVER,CONNECTOR
1809	3-796-985-02	s	CUSHION,DROP PROTECTION
1810	3-796-986-01	s	KNOB,SLIDE SW
1811	3-796-993-01	s	CUSION DROP PROTEICTION TOGGLE
1812	3-796-995-01	s	DROP PROTECTION(SW)
1813	3-796-996-02	s	KNOB(A),SW
1814	3-868-657-03	s	CAP,BNC
1815	3-872-598-02	s	PLATE,MIC PANEL
1816	3-872-935-01	s	CAP,BNC
1817	3-903-833-02	s	CAP,CONNECTOR
1818	3-965-077-02	s	SCREW, SPECIAL (M2)
1819	4-654-273-02	s	ACE (M2), LOCK
	7-627-556-58	s	SCREW,PRECISION +P2.6X5

※:「1−6. 部品交換時の注意事項」を参照してください。
※: Refer to Section 1-6, “Note for Replacing Parts”.

Hotshoe Block (HDC1500/1550/1580/1600)

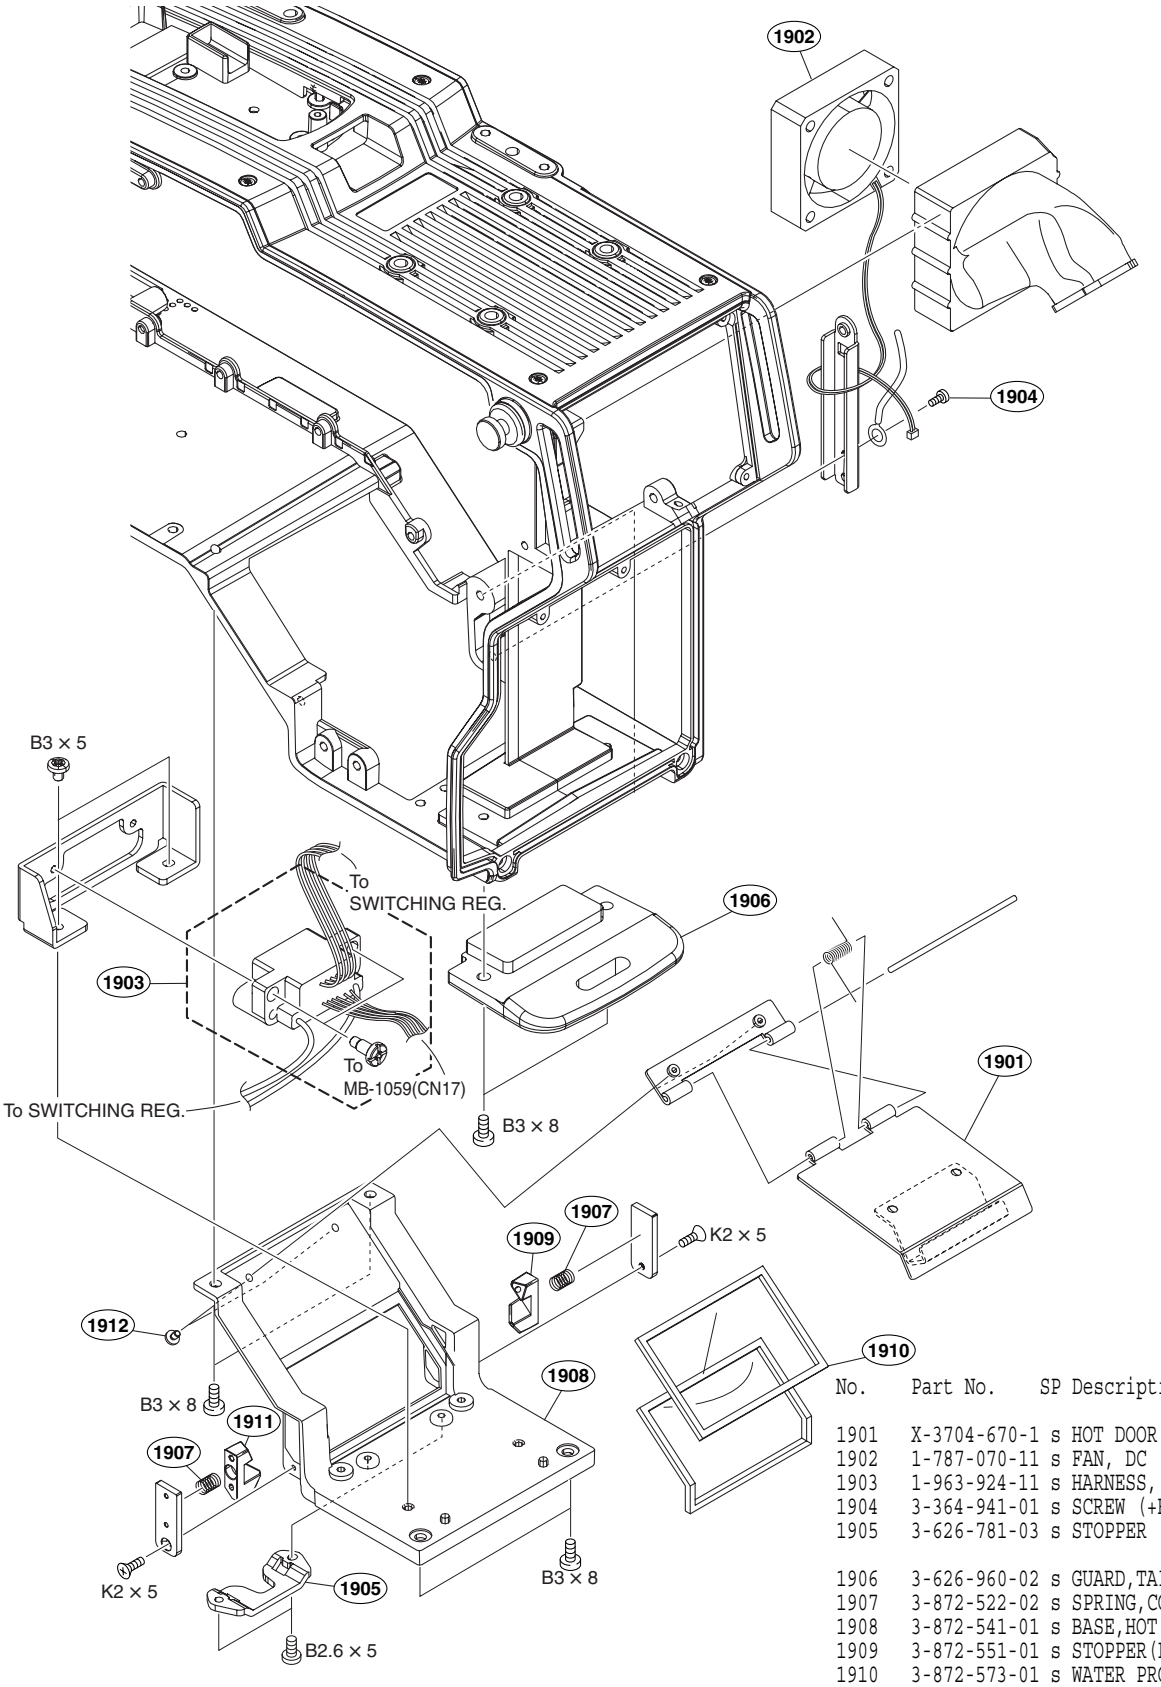

No.	Part No.	SP	Description
1901	X-3704-670-1	s	HOT DOOR
1902	1-787-070-11	s	FAN, DC (41 SQUARE)
1903	1-963-924-11	s	HARNESS, SUB (BUILD UP)
1904	3-364-941-01	s	SCREW (+B) (2.6X5),NYLOK
1905	3-626-781-03	s	STOPPER
1906	3-626-960-02	s	GUARD,TAIL
1907	3-872-522-02	s	SPRING,COMPRESSION(STOPPER)
1908	3-872-541-01	s	BASE,HOT SHOE
1909	3-872-551-01	s	STOPPER(L),HOT DOOR
1910	3-872-573-01	s	WATER PROTECT(HOT DOOR)
1911	3-872-550-01	s	STOPPER(R),HOT DOOR
1912	4-654-273-02	s	ACE (M2), LOCK
	7-621-555-30	s	SCREW +K 2X5(EP-FE/ZNBK/CM2)
	7-621-775-20	s	SCREW +B2.6X5
	7-682-546-09	s	SCREW +B3X5
	7-682-548-09	s	SCREW +B 3X8

1-3. Electrical Parts List

AT-163 BOARD
---

*1: [Board No. suffix 12]
*2: [Board No. suffix 13-]

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1101-926-A	s	MOUNTED CIRCUIT BOARD, AT-163
3pcs	3-729-061-01	s	SCREW (M2X4.5) (TYPE 1)(STEEL)
2pcs	4-654-273-02	s	ACE (M2), LOCK
C1	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3216
C2	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3216
C3	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3216
C4	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C6	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C7	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C8	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3216
C10	1-115-339-11	s	CAPACITOR,CERAMIC 0.1MF/50V
C12	1-115-339-11	s	CAPACITOR,CERAMIC 0.1MF/50V
C13	1-119-923-11	s	CAPACITOR,CHIP CERAMIC 0.047MF
C15	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C16	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C17	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C18	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C22	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C24	1-119-923-11	s	CAPACITOR,CHIP CERAMIC 0.047MF
C25	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C26	1-107-819-11	s	CAP,CERAMIC 22000PF/16V(1005)
C27	1-164-936-11	s	CAPACITOR,CHIP CERAMIC 680PF
C28	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C29	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C30	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C31	1-128-451-11	s	CAPACITOR ELECT 22MF/16V(105C)
C32	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C33	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C34	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3216
C35	1-128-451-11	s	CAPACITOR ELECT 22MF/16V(105C)
C36	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C102	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C103	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C104	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C105	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C106	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C107	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C108	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C109	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C110	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C111	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C112	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C113	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C114	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C115	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C116	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C117	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C119	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C120	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C121	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C122	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C123	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C124	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C125	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C126	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C127	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V

(AT-163 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C128	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C129	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C130	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C131	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C132	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C133	1-164-935-11	s	CAPACITOR,CHIP CERAMIC 470PF
C134	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C135	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C136	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C137	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C138	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C139	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C140	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C141	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C142	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C143	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C144	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C145	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C146	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C147	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C148	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C149	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C150	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C151	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C152	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C153	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C154	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C155	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C156	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C157	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C158	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C159	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C160	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C161	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C162	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C163	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C165	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C166	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C167	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C168	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C169	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C170	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C171	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C172	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C173	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C174	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C175	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C176	1-164-858-11	s	CAPACITOR,CERAMIC 22PF/50V
*2 C177	1-125-777-81	s	CERAMIC CHIP 0.1UF 10.00% 10V
C301	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C302	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C303	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C304	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C305	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C306	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C307	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C308	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C309	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C310	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V

(AT-163 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C311	1-164-850-11	s	CAPACITOR,CHIP CERAMIC 10PF/50
C312	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C313	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C314	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C315	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C316	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C317	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C318	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C319	1-164-858-11	s	CAPACITOR,CERAMIC 22PF/50V
C320	1-164-850-11	s	CAPACITOR,CHIP CERAMIC 10PF/50
C321	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C401	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C402	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C403	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C404	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C406	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C407	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C408	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C409	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C410	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C411	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C412	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C413	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C414	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C415	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C416	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C417	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C418	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C419	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C420	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C421	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C422	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C423	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C425	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C426	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C427	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C428	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C429	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C430	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C431	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C432	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C433	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C434	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C435	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
*2 C436	1-125-777-81	s	CERAMIC CHIP 0.1UF 10.00% 10V
*2 C437	1-125-777-81	s	CERAMIC CHIP 0.1UF 10.00% 10V
C601	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C602	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C603	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C604	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C605	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C606	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C607	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C608	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C609	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C610	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C611	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C612	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C613	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(AT-163 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C614	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C615	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C616	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C617	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C618	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C619	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C620	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C621	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C622	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C623	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C624	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C625	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C626	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C627	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C628	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C629	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C630	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C631	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C632	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C634	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C636	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C637	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C638	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C639	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C640	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C641	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C642	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C643	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C644	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C645	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C646	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C647	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
CN102	1-793-093-11	o	CONNECTOR, BOARD TO BOARD 60P
CN401	1-764-093-21	o	PIN, CONNECTOR (PC BOARD) 8P
D1	8-719-017-03	s	DIODE 02DZ4.7-TPH3
D2	8-719-017-03	s	DIODE 02DZ4.7-TPH3
D3	8-719-017-03	s	DIODE 02DZ4.7-TPH3
D102	8-719-820-41	s	DIODE 1SS302
D103	8-719-820-41	s	DIODE 1SS302
D104	8-719-820-41	s	DIODE 1SS302
D105	8-719-820-41	s	DIODE 1SS302
D401	8-719-820-41	s	DIODE 1SS302
D402	8-719-820-41	s	DIODE 1SS302
D403	8-719-820-41	s	DIODE 1SS302
D404	8-719-820-41	s	DIODE 1SS302
D601	8-719-820-41	s	DIODE 1SS302
D602	8-719-820-41	s	DIODE 1SS302
D603	8-719-820-41	s	DIODE 1SS302
D604	8-719-820-41	s	DIODE 1SS302
D605	8-719-820-41	s	DIODE 1SS302
D606	8-719-820-41	s	DIODE 1SS302
D607	8-719-820-41	s	DIODE 1SS302
D608	8-719-820-41	s	DIODE 1SS302
E1	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
FB1	1-469-094-21	s	FERRITE, EMI (SMD)
FB2	1-469-094-21	s	FERRITE, EMI (SMD)
FB101	1-469-094-21	s	FERRITE, EMI (SMD)

(AT-163 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
FB102	1-469-094-21	s	FERRITE, EMI (SMD)
FB103	1-469-094-21	s	FERRITE, EMI (SMD)
FB104	1-469-094-21	s	FERRITE, EMI (SMD)
FB105	1-469-094-21	s	FERRITE, EMI (SMD)
FB106	1-469-094-21	s	FERRITE, EMI (SMD)
FB301	1-469-094-21	s	FERRITE, EMI (SMD)
FB302	1-469-094-21	s	FERRITE, EMI (SMD)
FB401	1-469-094-21	s	FERRITE, EMI (SMD)
FB402	1-469-094-21	s	FERRITE, EMI (SMD)
FB403	1-469-094-21	s	FERRITE, EMI (SMD)
FB404	1-469-094-21	s	FERRITE, EMI (SMD)
FB405	1-469-094-21	s	FERRITE, EMI (SMD)
FB406	1-469-094-21	s	FERRITE, EMI (SMD)
FB407	1-469-094-21	s	FERRITE, EMI (SMD)
IC1	6-701-572-01	s	IC TPS54610PWPR
IC2	6-704-976-01	s	IC ADR381ART-REEL7
IC3	8-759-327-01	s	IC NJM062V-TE2
IC101	8-759-656-54	s	IC TC7WH14FK(TE85R)
IC102 *1	8-759-675-53	s	IC TC7WH32FK(TE85R)
IC103	8-759-564-49	s	IC TC7W53FU-TE12R
IC104	8-759-564-49	s	IC TC7W53FU-TE12R
IC105	8-759-546-74	s	IC TC7WH157FU(TE12R)
IC106	8-759-564-49	s	IC TC7W53FU-TE12R
IC107	8-759-564-49	s	IC TC7W53FU-TE12R
IC108	8-759-669-42	s	IC SN74LVC138APWR-12
IC109	6-703-421-01	s	IC HD64F7145F50
IC110	8-759-669-42	s	IC SN74LVC138APWR-12
IC111	8-759-447-77	s	IC TC7WH74FU (TE12R)
IC112	8-759-392-77	s	IC SN74LVC245APW (E20)
IC113	8-759-447-77	s	IC TC7WH74FU (TE12R)
IC114	8-759-546-74	s	IC TC7WH157FU(TE12R)
IC115	8-759-546-74	s	IC TC7WH157FU(TE12R)
IC116	8-759-598-44	s	IC TC7WH08FK(TE85R)
IC117	8-759-363-26	s	IC RN5VD28AA-TL
IC118	6-707-760-01	s	IC MBM29DL161TE90TN
IC120	6-704-099-01	f	IC TC7WZ08FK(TE85R)
IC121	8-759-327-01	s	IC NJM062V-TE2
IC122	6-707-760-01	s	IC MBM29DL161TE90TN
IC123	8-759-392-77	s	IC SN74LVC245APW (E20)
IC124	8-759-540-36	s	IC SN74LVC157APWR
IC125	8-759-669-42	s	IC SN74LVC138APWR-12
IC126	6-704-099-01	f	IC TC7WZ08FK(TE85R)
IC127	6-707-242-01	s	IC R1LV0416CSB-5SI
IC128	6-707-242-01	s	IC R1LV0416CSB-5SI
IC129	8-759-598-43	s	IC TC7WH04FK(TE85R)
IC130	8-759-598-43	s	IC TC7WH04FK(TE85R)
IC131	6-706-489-01	s	IC TC7SH32FU(T5RSOYJF)
IC132	8-759-523-94	s	IC TC74VHC32FT(EL)
IC133	6-707-947-01	s	IC MB85R256PFTN-G-BNDE1
IC134	8-759-675-53	s	IC TC7WH32FK-TE85R
IC135	8-759-675-53	s	IC TC7WH32FK-TE85R
IC136	8-759-598-44	s	IC TC7WH08FK(TE85R)
IC137	8-759-598-44	s	IC TC7WH08FK(TE85R)
IC138	8-759-675-53	s	IC TC7WH32FK-TE85R
IC139	6-707-947-01	s	IC MB85R256PFTN-G-BNDE1
IC140	8-759-669-44	s	IC SN74LVC74APWR-12
IC141	6-707-947-01	s	IC MB85R256PFTN-G-BNDE1
IC142	6-707-947-01	s	IC MB85R256PFTN-G-BNDE1
IC143	8-759-584-32	s	IC MB86189PFV-G-BND-ER

(AT-163 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC144	8-759-523-84	s	IC TC74VHC14FT (EL)
IC145	6-706-484-01	s	IC TC7SH04FU(T5RSOYJF)
IC146	8-759-592-10	s	IC TC7WH00FU-TE12R
IC147 *2	6-706-476-01	s	IC TC7SET04FU(T5RSOJF)
IC148 *2	6-706-481-01	s	IC TC7SET32FU(T5RSOJF)
IC301	8-759-594-17	o	IC CXD9093R
IC302	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC303	6-706-489-01	s	IC TC7SH32FU(T5RSOYJF)
IC304	8-759-546-74	s	IC TC7WH157FU(TE12R)
IC305	8-759-598-43	s	IC TC7WH04FK(TE85R)
IC306	8-759-092-81	s	IC SN75158PS
IC307	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC308	6-706-478-01	s	IC TC7SET08FU(T5RSOJF)
IC401	8-759-363-26	s	IC RN5VD28AA-TL
IC402	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC403	6-700-387-01	s	IC EPC2LC20-TP
IC406	8-759-688-12	s	IC TC74VHCT125AFT(EL)
IC407	8-759-598-44	s	IC TC7WH08FK(TE85R)
IC408	8-759-491-50	s	IC TC74VHCT244AFT(EL)
IC409 *2	6-706-476-01	s	IC TC7SET04FU(T5RSOJF)
IC410 *2	6-706-476-01	s	IC TC7SET04FU(T5RSOJF)
IC601	6-706-476-01	s	IC TC7SET04FU(T5RSOJF)
IC602	8-759-833-99	s	IC MC74HC4052ADTR2
IC603	8-759-833-99	s	IC MC74HC4052ADTR2
IC604	8-759-327-01	s	IC NJM062V-TE2
IC605	8-759-327-01	s	IC NJM062V-TE2
IC606	8-759-327-01	s	IC NJM062V-TE2
IC607	8-759-327-01	s	IC NJM062V-TE2
IC608	8-759-669-66	s	IC TLC272CPWR
IC609	8-759-327-01	s	IC NJM062V-TE2
IC610	8-759-327-01	s	IC NJM062V-TE2
IC611	6-708-346-01	s	IC DAC7512N
IC612	8-759-685-33	s	IC BU2500FV-E2
L1	1-414-398-11	s	INDUCTOR (SMD) 10UH
L2	1-414-398-11	s	INDUCTOR (SMD) 10UH
L3	1-414-398-11	s	INDUCTOR (SMD) 10UH
L4	1-416-344-11	s	COIL, CHOKE 10UH
L5	1-414-398-11	s	INDUCTOR (SMD) 10UH
L101	1-414-398-11	s	INDUCTOR (SMD) 10UH
L102	1-414-398-11	s	INDUCTOR (SMD) 10UH
L103	1-414-398-11	s	INDUCTOR (SMD) 10UH
L104	1-414-398-11	s	INDUCTOR (SMD) 10UH
L105	1-414-398-11	s	INDUCTOR (SMD) 10UH
L301	1-414-398-11	s	INDUCTOR (SMD) 10UH
L401	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L402	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L403	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L601	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L602	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L603	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
PH301	8-749-014-35	s	IC HCPL-0630-500
Q1	8-729-807-51	s	TRANSISTOR 2SD1623-S
Q2	8-729-230-27	s	TRANSISTOR 2SA1213Y-TE12L
Q3	8-729-230-27	s	TRANSISTOR 2SA1213Y-TE12L
Q101	8-729-927-99	s	TRANSISTOR 2SC4617R
Q102	8-729-928-19	s	TRANSISTOR 2SA1774R
Q103	8-729-927-99	s	TRANSISTOR 2SC4617R

(AT-163 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
Q104	8-729-928-81	s	TRANSISTOR DTC144EE
Q105	8-729-230-27	s	TRANSISTOR 2SA1213Y-TE12L
Q401	8-729-928-19	s	TRANSISTOR 2SA1774R
Q402	8-729-928-81	s	TRANSISTOR DTC144EE
Q404	8-729-928-81	s	TRANSISTOR DTC144EE
Q405	8-729-928-81	s	TRANSISTOR DTC144EE
Q406	8-729-928-81	s	TRANSISTOR DTC144EE
Q407	8-729-928-81	s	TRANSISTOR DTC144EE
Q408	8-729-928-27	s	TRANSISTOR DTA144EE
Q409	8-729-928-27	s	TRANSISTOR DTA144EE
Q410	8-729-928-27	s	TRANSISTOR DTA144EE
Q411	8-729-928-27	s	TRANSISTOR DTA144EE
Q412 *1	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q413 *1	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q414	8-729-928-27	s	TRANSISTOR DTA144EE
Q415	8-729-928-27	s	TRANSISTOR DTA144EE
Q416	8-729-928-27	s	TRANSISTOR DTA144EE
R1	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R2	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R3	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R4	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R5	1-220-221-11	s	RESISTOR CHIP 100 1/2W (4532)
R6	1-220-221-11	s	RESISTOR CHIP 100 1/2W (4532)
R7	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R8	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R9	1-220-221-11	s	RESISTOR CHIP 100 1/2W (4532)
R11	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R12	1-208-931-11	s	RESISTOR, CHIP 68K (1005)
R14	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R16	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R17	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R18	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R19	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R20	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R22	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R23	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R24	1-208-703-11	s	RESISTOR,CHIP 6.8K 1/16W(1005)
R25	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R26	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R27	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R28	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005
R29	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R30	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R31	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R32	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R33	1-208-679-11	s	RESISTOR CHIP 680 1/16W (1005)
R101	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R102	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R103	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R104	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R105	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R106	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R107	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R108	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R109	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R110	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R111	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R112	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)

(AT-163 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R113	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R114	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R115	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R116	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R117	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R118	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R119	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R120	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R121	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R122	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R123	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R124	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R125	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R126	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R127	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R128	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R129	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R130	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R131	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R132	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R133	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R134	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R135	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R136	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R137	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R138	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R139	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R140	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R141	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R142	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R143	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R144	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R145	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R146	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R147	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R148	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R149	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R150	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R151	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R152	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R153	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R154	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R155	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R156	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005
R157	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R158	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R160	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R161	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R162	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R163	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R164	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R165	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R167	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R168	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R169	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R170	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R171	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R172	1-218-989-11	s	RESISTOR,CHIP 1M 1/16W (1005)
R173	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)

(AT-163 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R174	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R175	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R176	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R177	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R178	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R179	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R180	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R181	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R182	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R183	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R186	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R187	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R191	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R192	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R193	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R194	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R195	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R196	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R197	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R198	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R199	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R200	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R201	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R202	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R203	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R204	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R205	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R206	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R207	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R209	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R210	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R212	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R213	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R214	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R215	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R216	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R217	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R218	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R219	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R220	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R221	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R225	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R226	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R227	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R228	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R231	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R232	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R234	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R236	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R237	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R238	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R240	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R241	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R242	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R243	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R244	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R245	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R254	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R255	1-208-935-11	s	RESISTOR, CHIP 100K (1005)

(AT-163 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R301	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R302	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R303	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R304	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R305	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R306	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R307	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R308	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R309	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R310	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R311	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R312	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R313	1-208-703-11	s	RESISTOR,CHIP 6.8K 1/16W(1005)
R314	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R315	1-208-703-11	s	RESISTOR,CHIP 6.8K 1/16W(1005)
R316	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R317	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R318	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R319	1-208-647-11	s	RESISTOR CHIP 33 1/16W (1005)
R320	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R321	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R322	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R323	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R401	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R402	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R403	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R404	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R405	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R406	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R407	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R408	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R411	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R412	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R413	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R415	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R416	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R417	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R419	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R420	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R421	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R422	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R423	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R424	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R426	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R428	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R429	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R430	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R431	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R432	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R433	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R434	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R435	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R437	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R438	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R439	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R442	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R443	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R448	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R450	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)

(AT-163 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R451	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R452	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R461	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R462	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R468	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R469	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R479	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R483	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R485	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R486	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R487	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R497	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R498	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R509	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R518	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R520	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R532	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R533	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005
R534	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005
R601	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R602	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R603	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R604	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R605	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R606	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R607	1-208-703-11	s	RESISTOR,CHIP 6.8K 1/16W(1005)
R608	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R609	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R610	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R611	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R612	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R613	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R614	1-208-679-11	s	RESISTOR CHIP 680 1/16W (1005)
R615	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R616	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R617	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R618	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R619	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R620	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R621	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R622	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R623	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R624	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R625	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R626	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R627	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R628	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R630	1-208-931-11	s	RESISTOR, CHIP 68K (1005)
R631	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R632	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R633	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R634	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R635	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R636	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R637	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R638	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R639	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R640	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R641	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)

(AT-163 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R645	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R646	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R647	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R648	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R649	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R650	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R651	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R652	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R653	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R654	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R655	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R656	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R657	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R658	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R659	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R660	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R661	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R662	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R665	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R666	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R667	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R668	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R669	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R670	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R671	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R672	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
RB103	1-234-380-11	s	RESISTOR,NETWORK 47KX4 (1005)
RB104	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB105	1-234-381-21	s	RES, NETWORK 100KX4 (1005)
RB106	1-234-381-21	s	RES, NETWORK 100KX4 (1005)
RB107	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB108	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB109	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB110	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB111	1-234-381-21	s	RES, NETWORK 100KX4 (1005)
RB112	1-234-381-21	s	RES, NETWORK 100KX4 (1005)
RB113	1-234-381-21	s	RES, NETWORK 100KX4 (1005)
RB114	1-234-381-21	s	RES, NETWORK 100KX4 (1005)
RB115	1-234-381-21	s	RES, NETWORK 100KX4 (1005)
RB116	1-234-381-21	s	RES, NETWORK 100KX4 (1005)
RB117	1-234-381-21	s	RES, NETWORK 100KX4 (1005)
RB118	1-234-381-21	s	RES, NETWORK 100KX4 (1005)
RB119	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB120	1-234-381-21	s	RES, NETWORK 100KX4 (1005)
RB121	1-234-381-21	s	RES, NETWORK 100KX4 (1005)
RB122	1-234-381-21	s	RES, NETWORK 100KX4 (1005)
RB123	1-234-381-21	s	RES, NETWORK 100KX4 (1005)
RB124	1-234-381-21	s	RES, NETWORK 100KX4 (1005)
RB125	1-234-381-21	s	RES, NETWORK 100KX4 (1005)
RB401	1-234-378-11	s	RES, NETWORK 10KX4 (1005)
RB402	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB403	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB404	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB405	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB406	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB407	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB408	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB409	1-234-372-11	s	RES, NETWORK 100X4 (1005)

(AT-163 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB410	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB411	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB412	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB413	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB414	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB415	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB416	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB417	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB601	1-234-380-11	s	RESISTOR,NETWORK 47KX4 (1005)
RB602	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB603	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB604	1-234-372-11	s	RES, NETWORK 100X4 (1005)
S1	1-692-270-41	s	SWITCH, SLIDE
THP1	1-804-458-21	s	THERMISTOR, POSITIVE
THP2	1-804-458-21	s	THERMISTOR, POSITIVE
THP3	1-804-616-11	s	THERMISTOR, POSITIVE
THP101	1-804-458-21	s	THERMISTOR, POSITIVE
X101	1-795-561-11	s	VIBRATOR, CERAMIC
X301	1-795-177-21	s	OSCILLATOR, CRYSTAL

AT-166 BOARD
---

*1: [Board No. suffix 11]
*2: [Board No. suffix 21-]

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1159-990-A	s	MOUNTED CIRCUIT BOARD, AT-166G (GOLD)
	A-1126-980-A	s	MOUNTED CIRCUIT BOARD, AT-166 (SILVER)
C3	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C4	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C5	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C14	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C15	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C18	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C19	1-128-451-11	s	CAPACITOR ELECT 22MF/16V(105C)
C21	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C22	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C23	1-128-451-11	s	CAPACITOR ELECT 22MF/16V(105C)
C24	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C31	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C33	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C37	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C38	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C39	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C43	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C44	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C45	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C46	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C47	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C48	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C49	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C50	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C51	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C52	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C53	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C54	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C55	1-164-850-11	s	CAPACITOR,CHIP CERAMIC 10PF/50
C56	1-164-850-11	s	CAPACITOR,CHIP CERAMIC 10PF/50
C57	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C58	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C60	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C61	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C62	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C63	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C64	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C65	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C66	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C67	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C68	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C69	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C70	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C71	1-164-858-11	s	CAPACITOR,CERAMIC 22PF/50V
C72	1-164-858-11	s	CAPACITOR,CERAMIC 22PF/50V
C73	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
CN1	1-770-621-21	s	PIN, CONNECTOR 4P
CN2	1-580-057-11	s	PIN,CONNECTOR 4P
CN3 *1	1-770-627-21	s	PIN, CONNECTOR 10P
CN5	1-770-625-21	s	PIN, CONNECTOR 8P
CN6	1-793-141-11	o	PIN, CONNECTOR (PC BOARD)

(AT-166 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
CN7	1-784-625-31	s	CONNECTOR, FFC/FPC(ZIF) AN 30P (GOLD)
	1-784-625-11	o	CONNECTOR, FFC (ZIF) 30P (SILVER)
CN8	1-784-625-31	s	CONNECTOR, FFC/FPC(ZIF) AN 30P (GOLD)
	1-784-625-11	o	CONNECTOR, FFC (ZIF) 30P (SILVER)
D1	8-719-017-03	s	DIODE 02DZ4.7-TPH3
D3	8-719-820-41	s	DIODE 1SS302
D4	8-719-820-41	s	DIODE 1SS302
D8	8-719-820-41	s	DIODE 1SS302
D9	8-719-820-41	s	DIODE 1SS302
D10	8-719-820-41	s	DIODE 1SS302
D11	8-719-820-41	s	DIODE 1SS302
D12	8-719-820-41	s	DIODE 1SS302
D13	8-719-820-41	s	DIODE 1SS302
D14	8-719-820-41	s	DIODE 1SS302
D15	8-719-820-41	s	DIODE 1SS302
D16	8-719-820-41	s	DIODE 1SS302
E1	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
FB1	1-469-094-21	s	FERRITE, EMI (SMD)
FB2	1-469-094-21	s	FERRITE, EMI (SMD)
FB5	1-469-094-21	s	FERRITE, EMI (SMD)
FB6	1-469-094-21	s	FERRITE, EMI (SMD)
FB7	1-469-094-21	s	FERRITE, EMI (SMD)
FB8	1-469-094-21	s	FERRITE, EMI (SMD)
FL6	1-239-896-12	s	FILTER, EMI (SMD)
FL7	1-239-896-12	s	FILTER, EMI (SMD)
FL8	1-239-896-12	s	FILTER, EMI (SMD)
FL10	1-239-896-12	s	FILTER, EMI (SMD)
FL11	1-239-896-12	s	FILTER, EMI (SMD)
FL12	1-239-896-12	s	FILTER, EMI (SMD)
FL13	1-239-896-12	s	FILTER, EMI (SMD)
FL14	1-239-896-12	s	FILTER, EMI (SMD)
IC1	6-704-976-01	s	IC ADR381ART-REEL7
IC4	8-759-327-01	s	IC NJM062V-TE2
IC6	6-702-624-01	s	IC HD64F2377VFQ33V
IC7	8-759-363-26	s	IC RN5VD28AA-TL
IC8	8-759-491-50	s	IC TC74VHCT244AFT(EL)
IC10	8-759-491-50	s	IC TC74VHCT244AFT(EL)
IC12	8-759-598-44	s	IC TC7WH08FK(TE85R)
IC13	8-759-598-44	s	IC TC7WH08FK(TE85R)
IC16	8-759-592-10	s	IC TC7WH00FU-TE12R
IC18	8-759-598-44	s	IC TC7WH08FK(TE85R)
IC20	8-759-523-84	s	IC TC74VHC14FT (EL)
IC21	8-759-491-50	s	IC TC74VHCT244AFT(EL)
IC22	8-759-491-50	s	IC TC74VHCT244AFT(EL)
IC23	8-759-491-50	s	IC TC74VHCT244AFT(EL)
IC24	8-759-491-50	s	IC TC74VHCT244AFT(EL)
IC25 *1	6-704-912-01	s	IC CAT24WC256XI-TE13
L1	1-414-398-11	s	INDUCTOR (SMD) 10UH
L2	1-414-398-11	s	INDUCTOR (SMD) 10UH
L4	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L5	1-424-700-21	s	COIL, CHOKE (SMD) 100UH
Q1	8-729-230-27	s	TRANSISTOR 2SA1213Y-TE12L

(AT-166 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
Q2	8-729-230-27	s	TRANSISTOR 2SA1213Y-TE12L
Q4 *1	8-729-928-81	s	TRANSISTOR DTC144EE-TL
R6	1-220-221-11	s	RESISTOR CHIP 100 1/2W (4532)
R10	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R11	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R15	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R16	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R17	1-208-703-11	s	RESISTOR,CHIP 6.8K 1/16W(1005)
R18	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R19	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R21	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R22	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R26	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R27	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R28	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R29	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R30	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R31	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R32	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R34	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R35	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R37	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R38	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R39	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R41	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005
R45	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R46	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R51	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R53	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R54	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R63	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R64	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R65	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R66	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R72	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R73	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R74	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R75	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R76	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R81	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R82	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R83	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005
R84	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005
R85	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R86	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R95	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R98	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R99	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R100	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R101	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R102	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R103	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R104	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R106 *1	1-208-935-11	s	METAL CHIP 100K 0.5% 1/16W
R107	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R108	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R109	1-208-911-11	s	RESISTOR, CHIP 10K (1005)

(AT-166 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R110	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R111	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R112	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R113	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R114	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R115	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R116	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R117	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R118	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R119	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R120	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R121	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R122	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R123	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R124	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R125	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R126	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R127	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R128	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R129	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R130	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R131	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R132	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R133	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R134	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R135	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R136	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R137	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R138	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R139	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R140	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R141	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R142	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R143	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R144	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R145	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R146	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R147	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R148	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R149	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R150	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R151	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R152	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R153	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R154	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R155	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R156	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R157	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R158	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R159	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R160	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R161	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R162 *2	1-208-683-11	s	METAL CHIP 1K 0.5% 1/16W
R163 *2	1-218-990-81	s	SHORT CHIP 0
RB1	1-234-380-11	s	RESISTOR,NETWORK 47KX4 (1005)
RB2	1-234-380-11	s	RESISTOR,NETWORK 47KX4 (1005)
RB3	1-234-380-11	s	RESISTOR,NETWORK 47KX4 (1005)
RB5	1-234-380-11	s	RESISTOR,NETWORK 47KX4 (1005)
RB7	1-234-380-11	s	RESISTOR,NETWORK 47KX4 (1005)

(AT-166 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB8	1-234-381-21	s	RES, NETWORK 100KX4 (1005)
RB9	1-234-381-21	s	RES, NETWORK 100KX4 (1005)
RB10	1-234-375-21	s	RES, NETWORK 1KX4 (1005)
RB11	1-234-375-21	s	RES, NETWORK 1KX4 (1005)
RB12	1-234-380-11	s	RESISTOR,NETWORK 47KX4 (1005)
RB13	1-234-380-11	s	RESISTOR,NETWORK 47KX4 (1005)
RB14	1-234-380-11	s	RESISTOR,NETWORK 47KX4 (1005)
RB15	1-234-380-11	s	RESISTOR,NETWORK 47KX4 (1005)
RB16	1-234-380-11	s	RESISTOR,NETWORK 47KX4 (1005)
RB17	1-234-380-11	s	RESISTOR,NETWORK 47KX4 (1005)
RB18	1-234-380-11	s	RESISTOR,NETWORK 47KX4 (1005)
RB19	1-234-380-11	s	RESISTOR,NETWORK 47KX4 (1005)
RB20	1-234-380-11	s	RESISTOR,NETWORK 47KX4 (1005)
RB21	1-234-380-11	s	RESISTOR,NETWORK 47KX4 (1005)
RB22	1-234-380-11	s	RESISTOR,NETWORK 47KX4 (1005)
RB23	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB24	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB25	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB26	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB27	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB28	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB29	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB30	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB31	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB32	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB33	1-234-380-11	s	RESISTOR,NETWORK 47KX4 (1005)
S1	1-692-270-41	s	SWITCH, SLIDE
THP1	1-804-458-21	s	THERMISTOR, POSITIVE
THP2	1-804-616-11	s	THERMISTOR, POSITIVE
X1	1-813-287-11	s	VIBRATOR, CRYSTAL

AU-298 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1101-924-A	s	MOUNTED CIRCUIT BOARD, AU-298
3pcs	3-729-061-01	s	SCREW (M2X4.5) (TYPE 1)(STEEL)
2pcs	4-654-273-02	s	ACE (M2), LOCK
C1	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3216
C2	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3216
C3	1-126-400-11	s	CAPACITOR ELECT 22MF/35V(CHIP)
C4	1-126-400-11	s	CAPACITOR ELECT 22MF/35V(CHIP)
C5	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C6	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C7	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C8	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C10	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C11	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C13	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C14	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C15	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C16	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C17	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C19	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C20	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C21	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C24	1-100-620-91	s	CAPACITOR, CHIP 47MF(3225)
C25	1-100-620-91	s	CAPACITOR, CHIP 47MF(3225)
C26	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C28	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C30	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C31	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C32	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C33	1-100-620-91	s	CAPACITOR, CHIP 47MF(3225)
C34	1-100-620-91	s	CAPACITOR, CHIP 47MF(3225)
C35	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C36	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C37	1-127-760-11	s	CAPACITOR,CERAMIC 4.7MF/6.3V
C38	1-127-760-11	s	CAPACITOR,CERAMIC 4.7MF/6.3V
C39	1-127-760-11	s	CAPACITOR,CERAMIC 4.7MF/6.3V
C40	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C41	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C42	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C45	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C46	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C201	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C202	1-165-887-91	s	CAP, CERAMIC 0.22MF (1005)
C203	1-117-145-11	s	CAPACITOR, ELECT 1MF/50V (BP)
C204	1-117-145-11	s	CAPACITOR, ELECT 1MF/50V (BP)
C205	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C206	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C207	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C208	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C209	1-164-866-11	s	CAPACITOR,CHIP CERAMIC 47PF/50
C210	1-164-876-11	s	CAPACITOR,CERAMIC 120PF/50V CH
C211	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C212	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C213	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C214	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C215	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C216	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C217	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C218	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)

(AU-298 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C219	1-115-459-11	s	CAPACITOR,ELECT 47MF/6.3V(BP)
C220	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C221	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C222	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C223	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C224	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C225	1-127-956-11	s	CAPACITOR,CHIP FILM 0.1MF
C227	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3216
C228	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3216
C229	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C230	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C231	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C232	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C233	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C234	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C235	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C236	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C237	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C238	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C239	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C240	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C241	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C242	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C243	1-119-923-11	s	CAPACITOR,CHIP CERAMIC 0.047MF
C246	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C247	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C248	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C249	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C250	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C252	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C253	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C254	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C255	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C256	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C257	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C258	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C259	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C301	1-117-145-11	s	CAPACITOR, ELECT 1MF/50V (BP)
C302	1-117-145-11	s	CAPACITOR, ELECT 1MF/50V (BP)
C303	1-164-866-11	s	CAPACITOR,CHIP CERAMIC 47PF/50
C304	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C305	1-164-876-11	s	CAPACITOR,CERAMIC 120PF/50V CH
C306	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C307	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C308	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C309	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C310	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C311	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C312	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C313	1-115-459-11	s	CAPACITOR,ELECT 47MF/6.3V(BP)
C314	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C315	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3216
C316	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3216
C317	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C318	1-164-940-11	s	CAPACITOR,CHIP CERAMIC 3300/16
C319	1-164-940-11	s	CAPACITOR,CHIP CERAMIC 3300/16
C320	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C321	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C322	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V

(AU-298 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C323	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C324	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C325	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C326	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C327	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C328	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C329	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C330	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C331	1-127-956-11	s	CAPACITOR,CHIP FILM 0.1MF
C332	1-164-935-11	s	CAPACITOR,CHIP CERAMIC 470PF
C333	1-164-935-11	s	CAPACITOR,CHIP CERAMIC 470PF
C334	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C335	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C336	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C337	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C338	1-107-420-11	s	CAPACITOR,ELECT 47MF/35V(105C)
C340	1-107-420-11	s	CAPACITOR,ELECT 47MF/35V(105C)
C342	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C343	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C344	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C345	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C346	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C347	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C349	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C350	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C351	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C352	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C401	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C402	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3216
C403	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C404	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C405	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C406	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C407	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C408	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C409	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C410	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C411	1-126-404-11	s	CAPACITOR,ELECT4.7MF/50V(CHIP)
C412	1-126-404-11	s	CAPACITOR,ELECT4.7MF/50V(CHIP)
C413	1-126-404-11	s	CAPACITOR,ELECT4.7MF/50V(CHIP)
C414	1-126-404-11	s	CAPACITOR,ELECT4.7MF/50V(CHIP)
C415	1-117-145-11	s	CAPACITOR, ELECT 1MF/50V (BP)
C416	1-117-145-11	s	CAPACITOR, ELECT 1MF/50V (BP)
C417	1-117-145-11	s	CAPACITOR, ELECT 1MF/50V (BP)
C418	1-117-145-11	s	CAPACITOR, ELECT 1MF/50V (BP)
C419	1-117-145-11	s	CAPACITOR, ELECT 1MF/50V (BP)
C420	1-117-145-11	s	CAPACITOR, ELECT 1MF/50V (BP)
C421	1-117-145-11	s	CAPACITOR, ELECT 1MF/50V (BP)
C422	1-117-145-11	s	CAPACITOR, ELECT 1MF/50V (BP)
C423	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C424	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C425	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C426	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C427	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C428	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C429	1-164-876-11	s	CAPACITOR,CERAMIC 120PF/50V CH
C430	1-164-876-11	s	CAPACITOR,CERAMIC 120PF/50V CH
C431	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C432	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V

(AU-298 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C433	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C434	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C435	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C436	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C437	1-115-459-11	s	CAPACITOR,ELECT 47MF/6.3V(BP)
C438	1-115-459-11	s	CAPACITOR,ELECT 47MF/6.3V(BP)
C439	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C440	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C441	1-164-876-11	s	CAPACITOR,CERAMIC 120PF/50V CH
C442	1-164-876-11	s	CAPACITOR,CERAMIC 120PF/50V CH
C443	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C444	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C445	1-127-956-11	s	CAPACITOR,CHIP FILM 0.1MF
C446	1-127-956-11	s	CAPACITOR,CHIP FILM 0.1MF
C447	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C448	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C449	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C450	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
D1	8-719-989-76	s	DIODE SC802-04-TE12RA
D2	8-719-989-76	s	DIODE SC802-04-TE12RA
D3	8-719-037-41	s	DIODE RD20SB-T1
D4	8-719-037-41	s	DIODE RD20SB-T1
D5	8-719-017-03	s	DIODE 02DZ4.7-TPH3
D6	8-719-017-03	s	DIODE 02DZ4.7-TPH3
D7	8-719-161-05	s	DIODE RD8.2SB-T1
D8	8-719-161-05	s	DIODE RD8.2SB-T1
D9	8-719-017-03	s	DIODE 02DZ4.7-TPH3
D10	8-719-017-03	s	DIODE 02DZ4.7-TPH3
D11	8-719-024-81	s	DIODE 1SS300-TE85L
D12	8-719-024-81	s	DIODE 1SS300-TE85L
D201	8-719-024-81	s	DIODE 1SS300-TE85L
D202	8-719-024-81	s	DIODE 1SS300-TE85L
D203	8-719-024-81	s	DIODE 1SS300-TE85L
D204	8-719-024-81	s	DIODE 1SS300-TE85L
D205	8-719-036-65	s	DIODE RD2.0SB-T1
D206	8-719-036-65	s	DIODE RD2.0SB-T1
D207	8-719-820-41	s	DIODE 1SS302
D301	8-719-024-81	s	DIODE 1SS300-TE85L
D302	8-719-024-81	s	DIODE 1SS300-TE85L
D303	8-719-024-81	s	DIODE 1SS300-TE85L
D304	8-719-024-81	s	DIODE 1SS300-TE85L
D401	8-719-801-78	s	DIODE 1SS184
D402	8-719-801-78	s	DIODE 1SS184
D403	8-719-801-78	s	DIODE 1SS184
D404	8-719-801-78	s	DIODE 1SS184
D405	8-719-801-78	s	DIODE 1SS184
D406	8-719-801-78	s	DIODE 1SS184
D407	8-719-037-25	s	DIODE RD13SB-T1
D408	8-719-801-78	s	DIODE 1SS184
D409	8-719-801-78	s	DIODE 1SS184
D410	8-719-801-78	s	DIODE 1SS184
D411	8-719-801-78	s	DIODE 1SS184
D412	8-719-024-81	s	DIODE 1SS300-TE85L
D413	8-719-024-81	s	DIODE 1SS300-TE85L
D414	8-719-801-78	s	DIODE 1SS184
D415	8-719-801-78	s	DIODE 1SS184
D416	8-719-024-81	s	DIODE 1SS300-TE85L
D417	8-719-024-81	s	DIODE 1SS300-TE85L

(AU-298 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
D418	8-719-801-78	s	DIODE 1SS184
D419	8-719-801-78	s	DIODE 1SS184
D420	8-719-024-81	s	DIODE 1SS300-TE85L
D421	8-719-024-81	s	DIODE 1SS300-TE85L
D422	8-719-024-81	s	DIODE 1SS300-TE85L
D423	8-719-024-81	s	DIODE 1SS300-TE85L
D424	8-719-024-81	s	DIODE 1SS300-TE85L
D425	8-719-024-81	s	DIODE 1SS300-TE85L
D426	8-719-024-81	s	DIODE 1SS300-TE85L
D427	8-719-024-81	s	DIODE 1SS300-TE85L
E1	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
IC3	8-759-327-01	s	IC NJM062V-TE2
IC4	6-704-976-01	s	IC ADR381ART-REEL7
IC5	8-759-327-01	s	IC NJM062V-TE2
IC11	8-759-672-76	s	IC AK9813BF-E2
IC12	8-759-672-76	s	IC AK9813BF-E2
IC13	8-759-672-76	s	IC AK9813BF-E2
IC15	8-759-327-01	s	IC NJM062V-TE2
IC16	8-759-327-01	s	IC NJM062V-TE2
IC18	8-759-973-71	s	IC TL7705CPS-B
IC19	8-759-497-44	s	IC TC7WH125FU(TE12R)
IC20	8-759-327-01	s	IC NJM062V-TE2
IC21	8-759-327-01	s	IC NJM062V-TE2
IC201	8-759-278-58	s	IC NJM4558V (TE2)
IC202	8-759-441-31	s	IC MC14053BDTR2
IC203	8-759-278-58	s	IC NJM4558V (TE2)
IC204	8-759-359-49	s	IC NJM3414AV (TE2)
IC205	8-759-278-58	s	IC NJM4558V (TE2)
IC206	8-759-085-04	s	IC M51132FP
IC207	8-759-564-49	s	IC TC7W53FU-TE12R
IC208	8-759-422-21	s	IC NJM4580VTE2
IC209	8-759-422-21	s	IC NJM4580VTE2
IC301	8-759-278-58	s	IC NJM4558V (TE2)
IC302	8-759-441-31	s	IC MC14053BDTR2
IC303	8-759-278-58	s	IC NJM4558V (TE2)
IC304	8-759-422-21	s	IC NJM4580VTE2
IC305	8-759-327-01	s	IC NJM062V-TE2
IC306	8-759-422-21	s	IC NJM4580VTE2
IC307	8-759-327-01	s	IC NJM062V-TE2
IC308	8-759-564-49	s	IC TC7W53FU-TE12R
IC401	8-759-441-31	s	IC MC14053BDTR2
IC402	8-759-278-58	s	IC NJM4558V (TE2)
IC411	8-759-441-31	s	IC MC14053BDTR2
IC412	8-759-278-58	s	IC NJM4558V (TE2)
JC1	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
JC2	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
JC3	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
JC4	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
JC5	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
JC6	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
JC7	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
JC8	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
JC9	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
JC10	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
JC11	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
JC12	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
JC13	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
JC14	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)

(AU-298 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
JC15	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
JC16	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
JC17	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
JC18	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
JC19	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
JC20	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
JC21	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
JC22	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
JC23	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
JC24	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
JC25	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
JC26	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
JC27	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
JC28	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
JC29	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
JC30	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
JC201	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
JC202	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
L1	1-414-398-11	s	INDUCTOR (SMD) 10UH
L2	1-414-398-11	s	INDUCTOR (SMD) 10UH
L3	1-414-398-11	s	INDUCTOR (SMD) 10UH
L4	1-414-398-11	s	INDUCTOR (SMD) 10UH
L5	1-414-398-11	s	INDUCTOR (SMD) 10UH
L6	1-414-398-11	s	INDUCTOR (SMD) 10UH
L7	1-414-398-11	s	INDUCTOR (SMD) 10UH
L8	1-414-398-11	s	INDUCTOR (SMD) 10UH
L9	1-414-398-11	s	INDUCTOR (SMD) 10UH
L10	1-414-398-11	s	INDUCTOR (SMD) 10UH
L201	1-414-398-11	s	INDUCTOR (SMD) 10UH
L202	1-414-398-11	s	INDUCTOR (SMD) 10UH
Q1	8-729-927-99	s	TRANSISTOR 2SC4617R
Q2	8-729-927-99	s	TRANSISTOR 2SC4617R
Q3	8-729-230-27	s	TRANSISTOR 2SA1213Y-TE12L
Q4	8-729-807-51	s	TRANSISTOR 2SD1623-S
Q5	8-729-807-51	s	TRANSISTOR 2SD1623-S
Q6	8-729-807-51	s	TRANSISTOR 2SD1623-S
Q7	8-729-928-19	s	TRANSISTOR 2SA1774R
Q8	8-729-927-99	s	TRANSISTOR 2SC4617R
Q201	8-729-928-81	s	TRANSISTOR DTC144EE
Q202	8-729-928-81	s	TRANSISTOR DTC144EE
Q203	8-729-928-81	s	TRANSISTOR DTC144EE
Q204	8-729-928-19	s	TRANSISTOR 2SA1774R
Q208	8-729-053-44	s	TRANSISTOR 2SK880-Y-TE85R
Q209	8-729-053-44	s	TRANSISTOR 2SK880-Y-TE85R
Q210	8-729-053-44	s	TRANSISTOR 2SK880-Y-TE85R
Q211	8-729-053-44	s	TRANSISTOR 2SK880-Y-TE85R
Q212	8-729-053-44	s	TRANSISTOR 2SK880-Y-TE85R
Q216	8-729-927-99	s	TRANSISTOR 2SC4617R
Q217	8-729-928-19	s	TRANSISTOR 2SA1774R
Q218	8-729-928-81	s	TRANSISTOR DTC144EE
Q219	8-729-928-81	s	TRANSISTOR DTC144EE
Q301	8-729-928-81	s	TRANSISTOR DTC144EE
Q302	8-729-928-81	s	TRANSISTOR DTC144EE
Q303	8-729-928-81	s	TRANSISTOR DTC144EE
Q304	8-729-928-19	s	TRANSISTOR 2SA1774R
Q308	8-729-053-44	s	TRANSISTOR 2SK880-Y-TE85R
Q309	8-729-053-44	s	TRANSISTOR 2SK880-Y-TE85R
Q310	8-729-053-44	s	TRANSISTOR 2SK880-Y-TE85R

(AU-298 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
Q311	8-729-053-44	s	TRANSISTOR 2SK880-Y-TE85R
Q312	8-729-053-44	s	TRANSISTOR 2SK880-Y-TE85R
Q316	8-729-927-99	s	TRANSISTOR 2SC4617R
Q317	8-729-928-19	s	TRANSISTOR 2SA1774R
Q401	8-729-807-51	s	TRANSISTOR 2SD1623-S
Q402	8-729-928-81	s	TRANSISTOR DTC144EE
Q403	8-729-928-81	s	TRANSISTOR DTC144EE
Q404	8-729-928-81	s	TRANSISTOR DTC144EE
Q405	8-729-928-81	s	TRANSISTOR DTC144EE
Q406	8-729-928-81	s	TRANSISTOR DTC144EE
Q407	8-729-928-81	s	TRANSISTOR DTC144EE
Q408	8-729-928-81	s	TRANSISTOR DTC144EE
Q409	8-729-928-19	s	TRANSISTOR 2SA1774R
Q410	8-729-927-99	s	TRANSISTOR 2SC4617R
Q411	8-729-928-81	s	TRANSISTOR DTC144EE
Q412	8-729-928-81	s	TRANSISTOR DTC144EE
Q413	8-729-928-81	s	TRANSISTOR DTC144EE
Q414	8-729-928-81	s	TRANSISTOR DTC144EE
Q415	8-729-928-81	s	TRANSISTOR DTC144EE
Q416	8-729-928-19	s	TRANSISTOR 2SA1774R
Q417	8-729-928-19	s	TRANSISTOR 2SA1774R
Q418	8-729-928-19	s	TRANSISTOR 2SA1774R
Q419	8-729-928-19	s	TRANSISTOR 2SA1774R
Q420	8-729-928-81	s	TRANSISTOR DTC144EE
Q421	8-729-928-81	s	TRANSISTOR DTC144EE
Q422	8-729-928-19	s	TRANSISTOR 2SA1774R
Q423	8-729-927-99	s	TRANSISTOR 2SC4617R
Q428	8-729-053-44	s	TRANSISTOR 2SK880-Y-TE85R
Q429	8-729-053-44	s	TRANSISTOR 2SK880-Y-TE85R
Q430	8-729-053-44	s	TRANSISTOR 2SK880-Y-TE85R
Q431	8-729-053-44	s	TRANSISTOR 2SK880-Y-TE85R
Q432	8-729-053-44	s	TRANSISTOR 2SK880-Y-TE85R
Q433	8-729-053-44	s	TRANSISTOR 2SK880-Y-TE85R
Q434	8-729-053-44	s	TRANSISTOR 2SK880-Y-TE85R
Q435	8-729-053-44	s	TRANSISTOR 2SK880-Y-TE85R
Q436	8-729-053-44	s	TRANSISTOR 2SK880-Y-TE85R
Q437	8-729-053-44	s	TRANSISTOR 2SK880-Y-TE85R
Q444	8-729-927-99	s	TRANSISTOR 2SC4617R
Q445	8-729-928-19	s	TRANSISTOR 2SA1774R
Q446	8-729-927-99	s	TRANSISTOR 2SC4617R
Q447	8-729-928-19	s	TRANSISTOR 2SA1774R
Q448	8-729-928-81	s	TRANSISTOR DTC144EE
R4	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R5	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R6	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R7	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R8	1-216-833-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R9	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R10	1-216-833-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R11	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R12	1-216-833-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R13	1-216-833-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R14	1-216-833-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R15	1-216-833-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R16	1-216-833-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R17	1-216-833-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R18	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R19	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)

(AU-298 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R20	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R21	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R22	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R23	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R24	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R25	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R26	1-208-931-11	s	RESISTOR, CHIP 68K (1005)
R27	1-208-931-11	s	RESISTOR, CHIP 68K (1005)
R28	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R29	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R30	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R31	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R32	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R33	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R34	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R35	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R36	1-208-931-11	s	RESISTOR, CHIP 68K (1005)
R37	1-208-931-11	s	RESISTOR, CHIP 68K (1005)
R38	1-208-931-11	s	RESISTOR, CHIP 68K (1005)
R39	1-208-931-11	s	RESISTOR, CHIP 68K (1005)
R40	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R41	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R42	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R43	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R44	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R45	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R46	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R47	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R48	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R49	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R50	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R51	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R52	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R53	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R54	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R55	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R56	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R57	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R58	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R59	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R60	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R61	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R62	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R63	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R64	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R65	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R66	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R67	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R68	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R69	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R70	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R71	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R72	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R73	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R74	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R75	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R76	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R77	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R78	1-208-911-11	s	RESISTOR, CHIP 10K (1005)

(AU-298 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R79	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R80	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R81	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R82	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R83	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R84	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R85	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R86	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R87	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R88	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R90	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R94	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R95	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R96	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R97	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R98	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R99	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R201	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R202	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R203	1-208-943-11	s	RESISTOR CHIP 220K
R204	1-208-943-11	s	RESISTOR CHIP 220K
R205	1-208-943-11	s	RESISTOR CHIP 220K
R206	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R207	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R208	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R209	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R210	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R211	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R212	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R213	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R214	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R215	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R216	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R217	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R218	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R219	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R220	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R221	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R222	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R223	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R224	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R225	1-218-985-11	s	RESISTOR CHIP 470K 1/16W(1005)
R226	1-218-985-11	s	RESISTOR CHIP 470K 1/16W(1005)
R227	1-218-985-11	s	RESISTOR CHIP 470K 1/16W(1005)
R228	1-218-985-11	s	RESISTOR CHIP 470K 1/16W(1005)
R229	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R230	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R231	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R232	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R233	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R234	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R235	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R236	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R237	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R238	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R239	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R240	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R241	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R242	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)

(AU-298 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R243	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R244	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R245	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R246	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R247	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R248	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R250	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R251	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R253	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R254	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R257	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R258	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R259	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R260	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R261	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R262	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R265	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R266	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R267	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R268	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R269	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R270	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R271	1-218-985-11	s	RESISTOR CHIP 470K 1/16W(1005)
R272	1-218-985-11	s	RESISTOR CHIP 470K 1/16W(1005)
R273	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R274	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R275	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R276	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R277	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R278	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R279	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R280	1-218-985-11	s	RESISTOR CHIP 470K 1/16W(1005)
R281	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R282	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R283	1-218-985-11	s	RESISTOR CHIP 470K 1/16W(1005)
R284	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R285	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R286	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R287	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R288	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R289	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R290	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R291	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R292	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R293	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R294	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R295	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R296	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R297	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R298	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R299	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R301	1-208-943-11	s	RESISTOR CHIP 220K
R302	1-208-943-11	s	RESISTOR CHIP 220K
R303	1-208-943-11	s	RESISTOR CHIP 220K
R304	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R305	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R306	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R307	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R308	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)

(AU-298 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R309	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R310	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R311	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R312	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R313	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R314	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R315	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R316	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R317	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R318	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R320	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R322	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R323	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R324	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R325	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R326	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R327	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R328	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R329	1-218-985-11	s	RESISTOR CHIP 470K 1/16W(1005)
R330	1-218-985-11	s	RESISTOR CHIP 470K 1/16W(1005)
R331	1-218-985-11	s	RESISTOR CHIP 470K 1/16W(1005)
R332	1-218-985-11	s	RESISTOR CHIP 470K 1/16W(1005)
R333	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R334	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R335	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R336	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R337	1-218-985-11	s	RESISTOR CHIP 470K 1/16W(1005)
R338	1-218-985-11	s	RESISTOR CHIP 470K 1/16W(1005)
R339	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R340	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R341	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R342	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R343	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R344	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R345	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R346	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R347	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R348	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R349	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R350	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R351	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R352	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R353	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R354	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R355	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R356	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R357	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R358	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R359	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R360	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R361	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R362	1-208-721-11	s	RESISTOR CHIP 39K 1/16W (1005)
R363	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R364	1-208-721-11	s	RESISTOR CHIP 39K 1/16W (1005)
R365	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R366	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R367	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R368	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R369	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)

(AU-298 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R370	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R371	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R372	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R373	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R374	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R375	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R376	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R377	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R378	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R379	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R380	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R381	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R382	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R383	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R384	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R385	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R386	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R387	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R388	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R389	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R390	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R392	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R394	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R395	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R396	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R397	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R398	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R399	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R401	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R402	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R403	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R404	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R405	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R406	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R407	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R408	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R409	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R410	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R411	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R412	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R413	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R414	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R415	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R416	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R417	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R418	1-208-943-11	s	RESISTOR CHIP 220K
R419	1-208-943-11	s	RESISTOR CHIP 220K
R420	1-208-943-11	s	RESISTOR CHIP 220K
R421	1-208-943-11	s	RESISTOR CHIP 220K
R422	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R423	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R424	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R425	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R426	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R427	1-208-943-11	s	RESISTOR CHIP 220K
R428	1-208-943-11	s	RESISTOR CHIP 220K
R429	1-208-943-11	s	RESISTOR CHIP 220K
R430	1-208-943-11	s	RESISTOR CHIP 220K
R431	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)

(AU-298 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R432	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R433	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R434	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R435	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R436	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R437	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R438	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R439	1-220-264-11	s	RESISTOR,CHIP 1K 1/4W (3225)
R440	1-220-264-11	s	RESISTOR,CHIP 1K 1/4W (3225)
R441	1-220-264-11	s	RESISTOR,CHIP 1K 1/4W (3225)
R442	1-220-264-11	s	RESISTOR,CHIP 1K 1/4W (3225)
R443	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R444	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R445	1-220-281-11	s	RESISTOR CHIP 4.7K 1/4W (3225)
R446	1-220-281-11	s	RESISTOR CHIP 4.7K 1/4W (3225)
R447	1-220-281-11	s	RESISTOR CHIP 4.7K 1/4W (3225)
R448	1-220-281-11	s	RESISTOR CHIP 4.7K 1/4W (3225)
R449	1-220-281-11	s	RESISTOR CHIP 4.7K 1/4W (3225)
R450	1-220-281-11	s	RESISTOR CHIP 4.7K 1/4W (3225)
R451	1-220-281-11	s	RESISTOR CHIP 4.7K 1/4W (3225)
R452	1-220-281-11	s	RESISTOR CHIP 4.7K 1/4W (3225)
R453	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R454	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R455	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R456	1-220-874-11	s	RES, CHIP 15 (1005)
R457	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R458	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R459	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R460	1-220-874-11	s	RES, CHIP 15 (1005)
R461	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R462	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R463	1-220-874-11	s	RES, CHIP 15 (1005)
R464	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R465	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R466	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R467	1-220-874-11	s	RES, CHIP 15 (1005)
R468	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R469	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R470	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R471	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R472	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R473	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R474	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R475	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R476	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R477	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R478	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R479	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R480	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R481	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R482	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R483	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R484	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R485	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R486	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R487	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R488	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R489	1-218-985-11	s	RESISTOR CHIP 470K 1/16W(1005)
R490	1-218-985-11	s	RESISTOR CHIP 470K 1/16W(1005)

(AU-298 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R491	1-218-985-11	s	RESISTOR CHIP 470K 1/16W(1005)
R492	1-218-985-11	s	RESISTOR CHIP 470K 1/16W(1005)
R493	1-218-985-11	s	RESISTOR CHIP 470K 1/16W(1005)
R494	1-218-985-11	s	RESISTOR CHIP 470K 1/16W(1005)
R495	1-218-985-11	s	RESISTOR CHIP 470K 1/16W(1005)
R496	1-218-985-11	s	RESISTOR CHIP 470K 1/16W(1005)
R497	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R498	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R499	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R500	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R501	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R502	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R503	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R504	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R505	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R506	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R507	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R508	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R509	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R510	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R511	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R512	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R513	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R514	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R515	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R516	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R517	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R518	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R519	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R520	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R521	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R522	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R523	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R524	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R525	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R526	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R527	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R528	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R529	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R530	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R531	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R532	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R533	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R534	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R535	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R536	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R537	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R538	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R539	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R540	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R541	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R542	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R543	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R544	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R545	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R546	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R547	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R548	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R549	1-208-911-11	s	RESISTOR, CHIP 10K (1005)

(AU-298 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R550	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R551	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R552	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R553	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R554	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R555	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R556	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R601	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R602	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R603	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R604	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R605	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R606	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R607	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R608	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R609	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R610	1-208-943-11	s	RESISTOR CHIP 220K
R611	1-208-943-11	s	RESISTOR CHIP 220K
R613	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R614	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R615	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R616	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R617	1-218-985-11	s	RESISTOR CHIP 470K 1/16W(1005)
R650	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R651	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R659	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R660	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R662	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R663	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
RV1	1-225-811-21	s	RES, ADJ, CERMET 20K
RV2	1-225-811-21	s	RES, ADJ, CERMET 20K
S1	1-762-217-31	s	SWITCH, SLIDE
S2	1-762-217-31	s	SWITCH, SLIDE
S3	1-692-881-41	s	SWITCH, SLIDE
THP3	1-803-353-21	s	THERMISTOR, POSITIVE
THP4	1-803-353-21	s	THERMISTOR, POSITIVE
THP6	1-803-353-21	s	THERMISTOR, POSITIVE

BI-175 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
3pcs	A-1137-932-A	s	MOUNTED CIRCUIT BOARD, BI-175
C1	1-135-342-11	s	CAPACITOR,SOLID ELECT 56MF
C2	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C3	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C5	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C6	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C7	1-100-503-11	s	CAPACITOR,CERAMIC 4.7MF B 2012
C8	1-164-862-11	s	CAPACITOR,CHIP CERAMIC 33PF/50
C9	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C11	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C12	1-164-858-11	s	CAPACITOR,CERAMIC 22PF/50V
C13	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C16	1-100-503-11	s	CAPACITOR,CERAMIC 4.7MF B 2012
C17	1-100-503-11	s	CAPACITOR,CERAMIC 4.7MF B 2012
C18	1-100-503-11	s	CAPACITOR,CERAMIC 4.7MF B 2012
C19	1-100-503-11	s	CAPACITOR,CERAMIC 4.7MF B 2012
C20	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3216
C22	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C26	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C27	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C28	1-165-629-11	s	CAPACITOR,CERAMIC 1MF B
C29	1-165-629-11	s	CAPACITOR,CERAMIC 1MF B
C30	1-165-629-11	s	CAPACITOR,CERAMIC 1MF B
C31	1-165-629-11	s	CAPACITOR,CERAMIC 1MF B
C32	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C33	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C34	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C35	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3216
C36	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C37	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3216
C38	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C39	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C40	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C41	1-164-840-11	s	CAPACITOR,CHIP CERAMIC 1.5PF
C42	1-164-840-11	s	CAPACITOR,CHIP CERAMIC 1.5PF
C43	1-164-843-11	s	CAPACITOR,CHIP CERAMIC 3PF/50V
C44	1-164-843-11	s	CAPACITOR,CHIP CERAMIC 3PF/50V
CN2	1-770-622-21	s	PIN, CONNECTOR 5P
D1	8-719-210-43	s	DIODE EC10QS06
D3	8-719-421-27	s	DIODE MA728
D4	8-719-421-27	s	DIODE MA728
D5	8-719-059-51	s	DIODE MA3J142E0LSO
D6	8-719-059-51	s	DIODE MA3J142E0LSO
IC1	8-759-346-27	s	IC LM45BIM3X
IC2	8-759-243-47	s	IC TC74ACT04F
IC3	8-759-243-47	s	IC TC74ACT04F
IC5	6-706-863-01	s	IC LMH6732MFX/NOPB
IC6	6-706-863-01	s	IC LMH6732MFX/NOPB
LV1	1-456-991-11	s	COIL, VARIABLE
LV2	1-456-991-11	s	COIL, VARIABLE
Q1	8-729-421-71	s	TRANSISTOR 2SK620
R1	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R2	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R3	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R4	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R5	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)

(BI-175 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R6	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R8	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R9	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R10	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R11	1-208-893-11	s	RESISTOR, CHIP 1.8K (1005)
R12	1-208-905-11	s	RESISTOR, CHIP 5.6K (1005)
R17	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R18	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R19	1-208-905-11	s	RESISTOR, CHIP 5.6K (1005)
R20	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R21	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R22	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R23	1-218-989-11	s	RESISTOR,CHIP 1M 1/16W (1005)
R24	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R25	1-218-989-11	s	RESISTOR,CHIP 1M 1/16W (1005)
R26	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R27	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R28	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R29	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R30	1-208-905-11	s	RESISTOR, CHIP 5.6K (1005)
R31	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R32	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R33	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R34	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R37	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R40	1-208-931-11	s	RESISTOR, CHIP 68K (1005)
R41	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R42	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R43	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R44	1-208-931-11	s	RESISTOR, CHIP 68K (1005)
R45	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R46	1-208-931-11	s	RESISTOR, CHIP 68K (1005)
R47	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R48	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R49	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R50	1-208-931-11	s	RESISTOR, CHIP 68K (1005)
R51	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R52	1-208-677-11	s	RESISTOR CHIP 560 1/16W (1005)
R53	1-208-677-11	s	RESISTOR CHIP 560 1/16W (1005)

BI-187 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1099-207-A	s	MOUNTED CIRCUIT BOARD, BI-187
C1	1-135-342-11	s	CAPACITOR,SOLID ELECT 56MF
C2	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C3	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C4	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C5	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C6	1-100-503-11	s	CAPACITOR,CERAMIC 4.7MF B 2012
C7	1-164-862-11	s	CAPACITOR,CHIP CERAMIC 33PF/50
C8	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C9	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C10	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C11	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C13	1-100-503-11	s	CAPACITOR,CERAMIC 4.7MF B 2012
C14	1-100-503-11	s	CAPACITOR,CERAMIC 4.7MF B 2012
C15	1-100-503-11	s	CAPACITOR,CERAMIC 4.7MF B 2012
C16	1-100-503-11	s	CAPACITOR,CERAMIC 4.7MF B 2012
C17	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3216
C19	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C21	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C22	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C23	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C24	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C25	1-165-629-11	s	CAPACITOR,CERAMIC 1MF B
C26	1-165-629-11	s	CAPACITOR,CERAMIC 1MF B
C27	1-165-629-11	s	CAPACITOR,CERAMIC 1MF B
C28	1-165-629-11	s	CAPACITOR,CERAMIC 1MF B
C29	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C30	1-165-947-91	s	CAP, CHIP CERAMIC 2.2MF (3225)
C31	1-165-947-91	s	CAP, CHIP CERAMIC 2.2MF (3225)
CN2	1-770-622-21	s	PIN, CONNECTOR 5P
D1	8-719-210-43	s	DIODE EC10QS06
D2	8-719-421-27	s	DIODE MA728
D3	8-719-421-27	s	DIODE MA728
D4	8-719-421-27	s	DIODE MA728
D5	8-719-059-51	s	DIODE MA3J142E0LSO
D6	8-719-059-51	s	DIODE MA3J142E0LSO
IC1	8-759-346-27	s	IC LM45BIM3X
IC2	8-759-243-47	s	IC TC74ACT04F
LV1	1-411-834-21	s	COIL, VARIABLE
Q1	8-729-421-71	s	TRANSISTOR 2SK620
Q2	6-550-361-01	s	TRANSISTOR 2SK2539-6/7/8-TB-E
Q3	6-550-361-01	s	TRANSISTOR 2SK2539-6/7/8-TB-E
R1	1-208-647-11	s	RESISTOR CHIP 33 1/16W (1005)
R2	1-218-939-11	s	RESISTOR, CHIP 68 1/16W (1005)
R3	1-220-880-11	s	RESISTOR,CHIP 27 (1005)
R4	1-220-880-11	s	RESISTOR,CHIP 27 (1005)
R5	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R6	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R7	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R8	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R9	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R10	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R11	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R12	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R13	1-208-911-11	s	RESISTOR, CHIP 10K (1005)

(BI-187 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R14	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R15	1-208-905-11	s	RESISTOR, CHIP 5.6K (1005)
R16	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R17	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R18	1-208-905-11	s	RESISTOR, CHIP 5.6K (1005)
R19	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R20	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R21	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R22	1-218-989-11	s	RESISTOR,CHIP 1M 1/16W (1005)
R23	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R24	1-218-989-11	s	RESISTOR,CHIP 1M 1/16W (1005)
R25	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R26	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R27	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R28	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R29	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R30	1-208-905-11	s	RESISTOR, CHIP 5.6K (1005)
R31	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R32	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R33	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R34	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R35	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R36	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R37	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R38	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R39	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)

BI-188 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1099-208-A	s	MOUNTED CIRCUIT BOARD, BI-188
C1	1-135-342-11	s	CAPACITOR,SOLID ELECT 56MF
C2	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C3	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C4	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C5	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C6	1-100-503-11	s	CAPACITOR,CERAMIC 4.7MF B 2012
C7	1-164-862-11	s	CAPACITOR,CHIP CERAMIC 33PF/50
C8	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C9	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C10	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C11	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C13	1-100-503-11	s	CAPACITOR,CERAMIC 4.7MF B 2012
C14	1-100-503-11	s	CAPACITOR,CERAMIC 4.7MF B 2012
C15	1-100-503-11	s	CAPACITOR,CERAMIC 4.7MF B 2012
C16	1-100-503-11	s	CAPACITOR,CERAMIC 4.7MF B 2012
C17	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3216
C19	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C21	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C22	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C23	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C24	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C25	1-165-629-11	s	CAPACITOR,CERAMIC 1MF B
C26	1-165-629-11	s	CAPACITOR,CERAMIC 1MF B
C27	1-165-629-11	s	CAPACITOR,CERAMIC 1MF B
C28	1-165-629-11	s	CAPACITOR,CERAMIC 1MF B
C29	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C30	1-165-947-91	s	CAP, CHIP CERAMIC 2.2MF (3225)
C31	1-165-947-91	s	CAP, CHIP CERAMIC 2.2MF (3225)
CN2	1-770-622-21	s	PIN, CONNECTOR 5P
D1	8-719-210-43	s	DIODE EC10QS06
D2	8-719-421-27	s	DIODE MA728
D3	8-719-421-27	s	DIODE MA728
D4	8-719-421-27	s	DIODE MA728
D5	8-719-059-51	s	DIODE MA3J142E0LSO
D6	8-719-059-51	s	DIODE MA3J142E0LSO
IC1	8-759-346-27	s	IC LM45BIM3X
IC2	8-759-243-47	s	IC TC74ACT04F
LV1	1-411-834-21	s	COIL, VARIABLE
Q1	8-729-421-71	s	TRANSISTOR 2SK620
Q2	6-550-361-01	s	TRANSISTOR 2SK2539-6/7/8-TB-E
Q3	6-550-361-01	s	TRANSISTOR 2SK2539-6/7/8-TB-E
R1	1-208-647-11	s	RESISTOR CHIP 33 1/16W (1005)
R2	1-218-939-11	s	RESISTOR, CHIP 68 1/16W (1005)
R3	1-220-880-11	s	RESISTOR,CHIP 27 (1005)
R4	1-220-880-11	s	RESISTOR,CHIP 27 (1005)
R5	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R6	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R7	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R8	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R9	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R10	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R11	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R12	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R13	1-208-911-11	s	RESISTOR, CHIP 10K (1005)

(BI-188 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R14	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R15	1-208-905-11	s	RESISTOR, CHIP 5.6K (1005)
R16	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R17	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R18	1-208-905-11	s	RESISTOR, CHIP 5.6K (1005)
R19	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R20	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R21	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R22	1-218-989-11	s	RESISTOR,CHIP 1M 1/16W (1005)
R23	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R24	1-218-989-11	s	RESISTOR,CHIP 1M 1/16W (1005)
R25	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R26	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R27	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R28	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R29	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R30	1-208-905-11	s	RESISTOR, CHIP 5.6K (1005)
R31	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R32	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R33	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R34	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R35	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R36	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R37	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R38	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R39	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)

BI-189 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1099-209-A	s	MOUNTED CIRCUIT BOARD, BI-189
C1	1-135-342-11	s	CAPACITOR,SOLID ELECT 56MF
C2	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C3	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C4	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C5	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C6	1-100-503-11	s	CAPACITOR,CERAMIC 4.7MF B 2012
C7	1-164-862-11	s	CAPACITOR,CHIP CERAMIC 33PF/50
C8	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C9	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C10	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C11	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C13	1-100-503-11	s	CAPACITOR,CERAMIC 4.7MF B 2012
C14	1-100-503-11	s	CAPACITOR,CERAMIC 4.7MF B 2012
C15	1-100-503-11	s	CAPACITOR,CERAMIC 4.7MF B 2012
C16	1-100-503-11	s	CAPACITOR,CERAMIC 4.7MF B 2012
C17	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3216
C19	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C21	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C22	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C23	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C24	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C25	1-165-629-11	s	CAPACITOR,CERAMIC 1MF B
C26	1-165-629-11	s	CAPACITOR,CERAMIC 1MF B
C27	1-165-629-11	s	CAPACITOR,CERAMIC 1MF B
C28	1-165-629-11	s	CAPACITOR,CERAMIC 1MF B
C29	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C30	1-165-947-91	s	CAP, CHIP CERAMIC 2.2MF (3225)
C31	1-165-947-91	s	CAP, CHIP CERAMIC 2.2MF (3225)
CN2	1-770-622-21	s	PIN, CONNECTOR 5P
D1	8-719-210-43	s	DIODE EC10QS06
D2	8-719-421-27	s	DIODE MA728
D3	8-719-421-27	s	DIODE MA728
D4	8-719-421-27	s	DIODE MA728
D5	8-719-059-51	s	DIODE MA3J142E0LSO
D6	8-719-059-51	s	DIODE MA3J142E0LSO
IC1	8-759-346-27	s	IC LM45BIM3X
IC2	8-759-243-47	s	IC TC74ACT04F
LV1	1-411-834-21	s	COIL, VARIABLE
Q1	8-729-421-71	s	TRANSISTOR 2SK620
Q2	6-550-361-01	s	TRANSISTOR 2SK2539-6/7/8-TB-E
Q3	6-550-361-01	s	TRANSISTOR 2SK2539-6/7/8-TB-E
R1	1-208-647-11	s	RESISTOR CHIP 33 1/16W (1005)
R2	1-218-939-11	s	RESISTOR, CHIP 68 1/16W (1005)
R3	1-220-880-11	s	RESISTOR,CHIP 27 (1005)
R4	1-220-880-11	s	RESISTOR,CHIP 27 (1005)
R5	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R6	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R7	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R8	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R9	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R10	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R11	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R12	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R13	1-208-911-11	s	RESISTOR, CHIP 10K (1005)

(BI-189 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R14	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R15	1-208-905-11	s	RESISTOR, CHIP 5.6K (1005)
R16	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R17	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R18	1-208-905-11	s	RESISTOR, CHIP 5.6K (1005)
R19	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R20	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R21	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R22	1-218-989-11	s	RESISTOR,CHIP 1M 1/16W (1005)
R23	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R24	1-218-989-11	s	RESISTOR,CHIP 1M 1/16W (1005)
R25	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R26	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R27	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R28	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R29	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R30	1-208-905-11	s	RESISTOR, CHIP 5.6K (1005)
R31	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R32	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R33	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R34	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R35	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R36	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R37	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R38	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R39	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)

CN-2578 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1099-261-A	s	MOUNTED CIRCUIT BOARD, CN-2578
C1	1-135-342-11	s	CAPACITOR,SOLID ELECT 56MF
C2	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C3	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C4	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C5	1-125-889-11	s	CAPACITOR, CERAMIC 2.2MF
C6	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C7	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C8	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C9	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C10	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C11	1-135-343-11	s	CAPACITOR,SOLID ELECT 120MF
C12	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C13	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C15	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C16	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C17	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C18	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C19	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C20	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C21	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C22	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C23	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C24	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
CN2	1-766-384-61	s	CONNECTOR, FPC 28P
CN3	1-766-384-61	s	CONNECTOR, FPC 28P
CN4	1-766-384-61	s	CONNECTOR, FPC 28P
IC1	8-759-592-42	s	IC TC7SZ00FU(TE85R)
IC2	6-704-976-01	s	IC ADR381ART-REEL7
IC3	8-759-592-42	s	IC TC7SZ00FU(TE85R)
IC4	8-759-592-42	s	IC TC7SZ00FU(TE85R)
IC5	8-759-327-01	s	IC NJM062V-TE2
IC6	8-759-592-42	s	IC TC7SZ00FU(TE85R)
IC7	8-759-592-42	s	IC TC7SZ00FU(TE85R)
IC8	8-759-592-42	s	IC TC7SZ00FU(TE85R)
IC9	8-759-592-42	s	IC TC7SZ00FU(TE85R)
IC10	8-759-592-42	s	IC TC7SZ00FU(TE85R)
IC11	8-759-592-42	s	IC TC7SZ00FU(TE85R)
IC12	8-759-592-42	s	IC TC7SZ00FU(TE85R)
IC13	8-759-592-42	s	IC TC7SZ00FU(TE85R)
IC14	8-759-592-42	s	IC TC7SZ00FU(TE85R)
L1	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
Q1	8-729-143-13	s	TRANSISTOR 2SC4176-B34
Q2	8-729-230-27	s	TRANSISTOR 2SA1213Y-TE12L
R1	1-220-874-11	s	RES, CHIP 15 (1005)
R2	1-220-874-11	s	RES, CHIP 15 (1005)
R3	1-220-874-11	s	RES, CHIP 15 (1005)
R4	1-220-874-11	s	RES, CHIP 15 (1005)
R5	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R6	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R7	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R8	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R9	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R10	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R11	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R12	1-208-703-11	s	RESISTOR,CHIP 6.8K 1/16W(1005)

(CN-2578 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R13	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R14	1-220-874-11	s	RES, CHIP 15 (1005)
R15	1-220-874-11	s	RES, CHIP 15 (1005)
R16	1-220-874-11	s	RES, CHIP 15 (1005)
R17	1-220-874-11	s	RES, CHIP 15 (1005)
R18	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R19	1-208-663-11	s	RESISTOR CHIP 150 1/16W (1005)
R20	1-218-939-11	s	RESISTOR, CHIP 68 1/16W (1005)
R21	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R22	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R23	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R24	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R25	1-220-874-11	s	RES, CHIP 15 (1005)
R26	1-220-874-11	s	RES, CHIP 15 (1005)
R27	1-220-874-11	s	RES, CHIP 15 (1005)
R28	1-220-874-11	s	RES, CHIP 15 (1005)
R29	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R30	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R31	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R32	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)

CN-2579 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1159-983-A	s	MOUNTED CIRCUIT BOARD,CN-2579G (GOLD)
	A-1099-262-A	s	MOUNTED CIRCUIT BOARD, CN-2579 (SILVER)
CN1	1-779-522-31	s	CONNECTOR, FFC/FPC(ZIF) AN 40P (GOLD)
CN2	1-764-441-51	s	CONNECTOR, FPC 30P (GOLD)
	1-764-441-21	s	CONNECTOR, FPC (30P) (SILVER)

CN-2602 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
CN1	1-564-002-11	s	PIN, CONNECTOR 3P
CN2	1-691-550-11	s	PIN,CONNECTOR (3P)(SMD)(1.5MM)
CN3	1-564-002-11	s	PIN, CONNECTOR 3P
R1	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)

CN-2603 BOARD
---

*A: [HDC1000(UCJ,J)/HDC1100(J)]
*B: [HDC1000(CE)]

Ref. No. or Q'ty		Part No.	SP	Description
1pc	*A	A-1124-075-A	s	MOUNTED CIRCUIT BOARD, CN-2603
1pc	*B	A-1177-500-A	s	MOUNTED CIRCUIT BOARD, CN-2603B
C1		1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C2		1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C3		1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C4		1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C5		1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C6		1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C7		1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C8		1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C9		1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C10		1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C11		1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C12		1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C13		1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C14		1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C15		1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C16		1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C17		1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C18		1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C19		1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
CN1		1-580-544-11	s	PIN, CONNECTOR (PC BOARD) 30P
CN2		1-566-765-11	o	PIN,CONNECTOR 10P
CN3		1-566-765-11	o	PIN,CONNECTOR 10P
JC1	*B	1-218-990-81	s	SHORT CHIP 0
R1		1-216-864-11	s	CONDUCTOR, CHIP (1608)
R2		1-216-864-11	s	CONDUCTOR, CHIP (1608)
R3		1-216-864-11	s	CONDUCTOR, CHIP (1608)
R4		1-216-864-11	s	CONDUCTOR, CHIP (1608)
R5		1-216-864-11	s	CONDUCTOR, CHIP (1608)
R6		1-216-864-11	s	CONDUCTOR, CHIP (1608)
R7	*A	1-216-864-11	S	SHORT CHIP 0
R8	*A	1-216-864-11	S	SHORT CHIP 0
R9	*B	1-216-864-11	S	SHORT CHIP 0
R10	*A	1-216-864-11	S	SHORT CHIP 0
RV1	*A	1-223-741-11	s	RESISTOR, METAL CARBON VAR 50K
RV2		1-223-741-11	s	RESISTOR, METAL CARBON VAR 50K
RV3		1-223-741-11	s	RESISTOR, METAL CARBON VAR 50K
RV4		1-223-741-11	s	RESISTOR, METAL CARBON VAR 50K
RV5		1-223-741-11	s	RESISTOR, METAL CARBON VAR 50K
RV6		1-223-741-11	s	RESISTOR, METAL CARBON VAR 50K
S1	*A	1-762-124-11	s	SWITCH, TOGGLE
S1	*B	1-762-123-11	s	SWITCH, TOGGLE
S2	*A	1-762-124-11	s	SWITCH, TOGGLE
S2	*B	1-762-123-11	s	SWITCH, TOGGLE
S3	*A	1-762-122-11	s	SWITCH, TOGGLE
S4	*A	1-762-122-11	s	SWITCH, TOGGLE

CN-2604 BOARD
---
*1: [Board No. suffix 12-]

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1124-076-A	s	MOUNTED CIRCUIT BOARD, CN-2604
C2	1-125-827-11	s	CAPACITOR,CERAMIC 1MF/25V
C3	1-125-827-11	s	CAPACITOR,CERAMIC 1MF/25V
C4	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C5	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C6	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C7	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C8	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C9	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C10	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C11	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C12	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C13	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C14	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C15	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C16	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C17	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C18	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C19	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C20	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C21	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C22	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C23	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C24	1-125-827-11	s	CAPACITOR,CERAMIC 1MF/25V
C25 *1	1-125-777-11	s	CERAMIC CHIP 0.1UF 10.00% 10V
CN1	1-778-552-11	o	PIN, CONNECTOR 30P
FB1	1-469-094-21	s	FERRITE, EMI (SMD)
FB2	1-469-094-21	s	FERRITE, EMI (SMD)
FB3	1-469-094-21	s	FERRITE, EMI (SMD)
FB4	1-469-094-21	s	FERRITE, EMI (SMD)
FB5	1-234-518-21	s	ARRAY, FERRITE CHIP
FB6	1-234-518-21	s	ARRAY, FERRITE CHIP
FB7	1-234-518-21	s	ARRAY, FERRITE CHIP
FB8	1-234-518-21	s	ARRAY, FERRITE CHIP
FB9	1-414-772-11	s	INDUCTOR,MICRO(CHIP TYPE) 2012
FB10	1-414-772-11	s	INDUCTOR,MICRO(CHIP TYPE) 2012
FB11	1-469-108-11	s	FERRITE, EMI (SMD)
FB12	1-469-108-11	s	FERRITE, EMI (SMD)
FB13	1-469-108-11	s	FERRITE, EMI (SMD)
FB14	1-414-772-11	s	INDUCTOR,MICRO(CHIP TYPE) 2012
FB15	1-414-772-11	s	INDUCTOR,MICRO(CHIP TYPE) 2012
THP1	1-803-615-11	s	THERMISTOR, POSITIVE
THP2	1-803-615-11	s	THERMISTOR, POSITIVE
THP3	1-804-987-21	s	THERMISTOR, POSITIVE

CN-2605 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
C1	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C2	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
CN1	1-779-806-21	s	CONNECTOR, 1.0MM PITCH 8P
D1	8-719-046-87	s	DIODE F1J6

CN-2606 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1124-078-A	s	MOUNTED CIRCUIT BOARD, CN-2606
CN1	1-817-325-21	s	PIN, CONNECTOR 20P
CN2	1-573-594-11	s	CONNECTOR, XLR TYPE 3P
CN3	1-573-594-11	s	CONNECTOR, XLR TYPE 3P
FB1	1-469-094-21	s	FERRITE, EMI (SMD)
FB2	1-469-094-21	s	FERRITE, EMI (SMD)
FB3	1-469-094-21	s	FERRITE, EMI (SMD)
FB4	1-469-094-21	s	FERRITE, EMI (SMD)
FB5	1-469-094-21	s	FERRITE, EMI (SMD)
FB6	1-469-094-21	s	FERRITE, EMI (SMD)
FL1	1-239-897-12	s	FILTER, EMI (SMD)
FL2	1-239-897-12	s	FILTER, EMI (SMD)
FL3	1-239-897-12	s	FILTER, EMI (SMD)
FL4	1-239-897-12	s	FILTER, EMI (SMD)
FL5	1-239-897-12	s	FILTER, EMI (SMD)
FL6	1-239-897-12	s	FILTER, EMI (SMD)
R1	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R2	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R3	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)
R4	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)
R5	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R6	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R7	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)
R8	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)
R9	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R11	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R13	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R14	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R16	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R18	1-216-864-11	s	CONDUCTOR, CHIP (1608)
S1	1-771-122-11	s	SWITCH, SLIDE
S2	1-771-122-11	s	SWITCH, SLIDE
S3	1-762-823-11	s	SWITCH, SLIDE
S4	1-572-042-11	s	SWITCH,SLIDE (2-4-3)

CN-2607 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
CN1	1-580-838-11	o	PIN,CONNECTOR (PC BOARD) 4P
CN2	1-764-101-11	s	PIN, CONNECTOR (PC BOARD) 2P
CN3	1-766-176-11	o	PIN, CONNECTOR (PC BOARD) 6P
CN4	1-580-837-11	o	PIN,CONNECTOR (PC BOARD) 3P

CN-2608 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
3pcs	2-176-841-01	s	SCREW(M1.7)
C1	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
CN1	1-785-593-31	s	CONNECTOR, MEMORY STICK
CN2	1-770-627-21	s	PIN, CONNECTOR 10P
D1	6-500-122-01	s	DIODE CL-375HR1YG-D-T
Q1	8-729-928-81	s	TRANSISTOR DTC144EE
Q2	8-729-928-81	s	TRANSISTOR DTC144EE
R1	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R2	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)

CN-2609 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1166-186-A	s	MOUNTED CIRCUIT BOARD,CN-2609G (GOLD)
	A-1123-671-A	s	MOUNTED CIRCUIT BOARD, CN-2609 (SILVER)
C1	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C2	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C3	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C4	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C5	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
CN2	1-764-087-21	s	PIN, CONNECTOR (PC BOARD) 14P
CN3	1-778-650-11	o	CONNECTOR, FFC (ZIF) 30P (SILVER)
CN4	1-816-587-11	s	PIN, CONNECTOR (PC BOARD) 15P
L1	1-414-398-11	s	INDUCTOR (SMD) 10UH
L2	1-416-344-11	s	COIL, CHOKE 10UH
L3	1-416-948-21	s	COIL, CHOKE (SMD)
L4	1-416-344-11	s	COIL, CHOKE 10UH
L5	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L6	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L7	1-416-344-11	s	COIL, CHOKE 10UH
R1	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R2	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
THP1	1-803-615-11	s	THERMISTOR, POSITIVE
THP2	1-803-615-11	s	THERMISTOR, POSITIVE
THP3	1-803-615-11	s	THERMISTOR, POSITIVE

CN-2614 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1172-523-A	s	MOUNTED CIRCUIT BOARD, CN-2614B
1pc	3-186-958-01	o	NUT (VF), PLATE
C1	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C2	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C3	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C4	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C5	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C6	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C7	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C8	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C9	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C10	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C14	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C16	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C17	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C18	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C19	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C20	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C21	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C22	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C23	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C24	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
CN2	1-793-152-21	o	CONNECTOR 11P
CN3	1-817-325-21	s	PIN, CONNECTOR 20P
D2	8-719-043-70	s	DIODE MA6S121-(TX)
FB1	1-234-518-21	s	ARRAY, FERRITE CHIP
FB2	1-234-518-21	s	ARRAY, FERRITE CHIP
FB3	1-469-108-21	s	FERRITE, EMI (SMD) (1608)
FB4	1-469-108-21	s	FERRITE, EMI (SMD) (1608)
FB5	1-469-108-21	s	FERRITE, EMI (SMD) (1608)
FB6	1-414-772-21	s	FERRITE. EMI (SMD) (2012)
FB7	1-234-518-21	s	ARRAY, FERRITE CHIP
FB8	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
L1	1-416-344-21	s	COIL, CHOKE 10UH
R3	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4	1-208-887-81	s	RES, CHIP 1.0K (1005)

CN-2615 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
C1	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C2	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C3	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C4	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C5	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
CN1	1-573-594-11	s	CONNECTOR, XLR TYPE 3P
CN3	1-817-318-21	s	PIN, CONNECTOR 6P
FB1	1-469-094-21	s	FERRITE, EMI (SMD)
FB2	1-469-094-21	s	FERRITE, EMI (SMD)
FB3	1-469-094-21	s	FERRITE, EMI (SMD)
FB4	1-469-094-21	s	FERRITE, EMI (SMD)
FB5	1-469-094-21	s	FERRITE, EMI (SMD)
R1	1-216-864-11	s	CONDUCTOR, CHIP (1608)

CN-2616 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	3-872-352-01	s	BRACKET,LENS
C1	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C6	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C7	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C8	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C9	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C10	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C12	1-115-339-11	s	CAPACITOR,CERAMIC 0.1MF/50V
C13	1-115-339-11	s	CAPACITOR,CERAMIC 0.1MF/50V
CN1	1-562-221-31	s	CONNECTOR (ROUND TYPE)(R-F)12P
CN2	1-819-308-21	s	PIN, CONNECTOR 15P
FB1	1-414-772-11	s	INDUCTOR,MICRO(CHIP TYPE) 2012
FB2	1-414-772-11	s	INDUCTOR,MICRO(CHIP TYPE) 2012
FB3	1-234-518-21	s	ARRAY, FERRITE CHIP
FB4	1-234-518-21	s	ARRAY, FERRITE CHIP
FB5	1-469-094-21	s	FERRITE, EMI (SMD)
FB6	1-469-094-21	s	FERRITE, EMI (SMD)

CN-2617 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1099-117-A	s	MOUNTED CIRCUIT BOARD, CN-2617
C1	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C2	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C4	1-115-339-11	s	CAPACITOR,CERAMIC 0.1MF/50V
C5	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C6	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
CN2	1-779-772-11	s	CONENCTOR 13P
CN3	1-770-621-21	s	PIN, CONNECTOR 4P
CN4	1-793-152-21	o	CONNECTOR 11P
CN5	1-770-619-11	s	PIN, CONNECTOR 2P
CN6	1-794-917-11	s	CONNECTOR, MEMORY STICK
CN7	1-778-965-21	s	PIN, CONNECTOR (PC BOARD) 12P
CN8	1-785-900-41	s	CONNECTOR 5P
CN9	1-816-113-21	s	CONNECTOR 15P
D1	8-719-801-78	s	DIODE 1SS184
D2	8-719-801-78	s	DIODE 1SS184
D3	6-500-122-01	s	DIODE CL-375HR1YG-D-T
D4	8-719-801-78	s	DIODE 1SS184
D5	8-719-801-78	s	DIODE 1SS184
D6	8-719-820-41	s	DIODE 1SS302
D7	8-719-820-41	s	DIODE 1SS302
IC1	6-702-481-01	s	IC PCA9555DB-118
IC2	6-702-481-01	s	IC PCA9555DB-118
Q1	8-729-928-81	s	TRANSISTOR DTC144EE
Q2	8-729-928-81	s	TRANSISTOR DTC144EE
Q3	8-729-928-81	s	TRANSISTOR DTC144EE
Q4	8-729-928-81	s	TRANSISTOR DTC144EE
R1	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R2	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R3	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R4	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R5	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R6	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R7	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R8	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R9	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R10	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R11	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R12	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
RB1	1-234-380-11	s	RESISTOR,NETWORK 47KX4 (1005)
RB2	1-234-380-11	s	RESISTOR,NETWORK 47KX4 (1005)
RB3	1-234-380-11	s	RESISTOR,NETWORK 47KX4 (1005)
RB4	1-234-380-11	s	RESISTOR,NETWORK 47KX4 (1005)
RB5	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB6	1-234-375-21	s	RES, NETWORK 1KX4 (1005)
RB7	1-234-375-21	s	RES, NETWORK 1KX4 (1005)
RB8	1-234-375-21	s	RES, NETWORK 1KX4 (1005)
RB9	1-234-375-21	s	RES, NETWORK 1KX4 (1005)
RB10	1-234-375-21	s	RES, NETWORK 1KX4 (1005)
RB11	1-234-375-21	s	RES, NETWORK 1KX4 (1005)
RB12	1-234-375-21	s	RES, NETWORK 1KX4 (1005)
RB13	1-234-380-11	s	RESISTOR,NETWORK 47KX4 (1005)
RB14	1-234-380-11	s	RESISTOR,NETWORK 47KX4 (1005)

CN-2618 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
C2	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C3	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C4	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C5	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
CN1	1-784-254-11	s	CONNECTOR 10P
CN3	1-784-602-11	s	CONNECTOR, XLR (RECEPTACLE) 5P
FB1	1-414-445-11	s	FERRITE, EMI (SMD)
FB2	1-414-445-11	s	FERRITE, EMI (SMD)
FB3	1-414-445-11	s	FERRITE, EMI (SMD)
FB4	1-414-445-11	s	FERRITE, EMI (SMD)
FL1	1-239-897-12	s	FILTER, EMI (SMD)
FL2	1-239-897-12	s	FILTER, EMI (SMD)
FL3	1-239-897-12	s	FILTER, EMI (SMD)
FL4	1-239-897-12	s	FILTER, EMI (SMD)

CN-2619 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1159-984-A	s	MOUNTED CIRCUIT BOARD,CN-2619G (GOLD)
	A-1099-119-A	s	MOUNTED CIRCUIT BOARD, CN-2619 (SILVER)
2pcs	3-729-076-11	s	SCREW +B2X4 (STEEL)
C1	1-125-827-11	s	CAPACITOR,CERAMIC 1MF/25V
C2	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C3	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C4	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C5	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C6	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C7	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C8	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C9	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C10	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C11	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C12	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C13	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C14	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C15	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C16	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C17	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C18	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C19	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C20	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C21	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C22	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C23	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C24	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C25	1-125-827-11	s	CAPACITOR,CERAMIC 1MF/25V
C26	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C27	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C28	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C29	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C30	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
CN1	1-778-651-11	o	CONNECTOR, FFC (ZIF) 40P (SILVER)
CN2	1-770-469-21	o	PIN, CONNECTOR (PC BOARD) 2P
CN3	1-785-125-11	o	CONNECTOR 6P
CN4	1-565-443-11	o	RECEPTACLE,CONNECTOR 10P
CN5	1-819-262-11	s	CONNECTOR, ROUND TYPE 12P
CN6	1-562-222-21	s	RECEPTACLE,CONNECTOR 6P
CN7	1-785-900-41	s	CONNECTOR 5P
CN8	1-563-929-11	s	CONNECTOR,ROUND TYPE (RF) 4P
FB1	1-469-094-21	s	FERRITE, EMI (SMD)
FB2	1-469-094-21	s	FERRITE, EMI (SMD)
FB3	1-469-094-21	s	FERRITE, EMI (SMD)
FB4	1-469-094-21	s	FERRITE, EMI (SMD)
FB5	1-234-518-21	s	ARRAY, FERRITE CHIP
FB6	1-234-518-21	s	ARRAY, FERRITE CHIP
FB7	1-234-518-21	s	ARRAY, FERRITE CHIP
FB8	1-234-518-21	s	ARRAY, FERRITE CHIP
FB9	1-234-518-21	s	ARRAY, FERRITE CHIP
FB10	1-414-772-11	s	INDUCTOR,MICRO(CHIP TYPE) 2012
FB11	1-414-772-11	s	INDUCTOR,MICRO(CHIP TYPE) 2012
FB12	1-469-108-11	s	FERRITE, EMI (SMD)
FB13	1-469-108-11	s	FERRITE, EMI (SMD)
FB14	1-469-108-11	s	FERRITE, EMI (SMD)

(CN-2619 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
FB15	1-469-108-11	s	FERRITE, EMI (SMD)
FB16	1-469-108-11	s	FERRITE, EMI (SMD)
FB17	1-414-772-11	s	INDUCTOR,MICRO(CHIP TYPE) 2012
FB18	1-414-772-11	s	INDUCTOR,MICRO(CHIP TYPE) 2012
S1	1-771-141-11	s	SWITCH, SLIDE
THP1	1-803-615-11	s	THERMISTOR, POSITIVE
THP2	1-803-615-11	s	THERMISTOR, POSITIVE

CN-2620 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
CN1	1-580-724-11	s	CONNECTOR, BNC
CN2	1-580-724-11	s	CONNECTOR, BNC
CN3	1-817-317-21	s	PIN, CONNECTOR 5P
FB1	1-469-108-11	s	FERRITE, EMI (SMD)
FB2	1-469-108-11	s	FERRITE, EMI (SMD)

CN-2621 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1159-985-A	s	MOUNTED CIRCUIT BOARD,CN-2621G (GOLD)
	A-1099-121-A	s	MOUNTED CIRCUIT BOARD, CN-2621 (SILVER)
C1	1-125-827-11	s	CAPACITOR,CERAMIC 1MF/25V
C2	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C3	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C4	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C5	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C6	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C7	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C15	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C16	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C17	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C18	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C19	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C20	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C21	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
CN1	1-794-142-31	s	CONNECTOR, FFC/FPC(ZIF) AN 36P (GOLD)
	1-794-142-11	o	CONNECTOR, FFC (ZIF) 36P (SILVER)
CN3	1-817-322-21	s	PIN, CONNECTOR 12P
CN4	1-573-594-11	s	CONNECTOR, XLR TYPE 3P
CN5	1-573-594-11	s	CONNECTOR, XLR TYPE 3P
D1	8-719-801-78	s	DIODE 1SS184
D2	8-719-801-78	s	DIODE 1SS184
FB1	1-234-518-21	s	ARRAY, FERRITE CHIP
FB2	1-469-094-21	s	FERRITE, EMI (SMD)
FB3	1-469-094-21	s	FERRITE, EMI (SMD)
FB4	1-469-094-21	s	FERRITE, EMI (SMD)
FB5	1-469-094-21	s	FERRITE, EMI (SMD)
FB6	1-469-094-21	s	FERRITE, EMI (SMD)
FB7	1-469-094-21	s	FERRITE, EMI (SMD)
FB8	1-469-094-21	s	FERRITE, EMI (SMD)
FB9	1-469-094-21	s	FERRITE, EMI (SMD)
FB10	1-469-094-21	s	FERRITE, EMI (SMD)
FB11	1-469-094-21	s	FERRITE, EMI (SMD)
FB12	1-469-094-21	s	FERRITE, EMI (SMD)
FL1	1-239-897-12	s	FILTER, EMI (SMD)
FL2	1-239-897-12	s	FILTER, EMI (SMD)
FL3	1-239-897-12	s	FILTER, EMI (SMD)
FL4	1-239-897-12	s	FILTER, EMI (SMD)
FL5	1-239-897-12	s	FILTER, EMI (SMD)
FL6	1-239-897-12	s	FILTER, EMI (SMD)
IC1	6-702-481-01	s	IC PCA9555DB-118
L1	1-416-344-11	s	COIL, CHOKE 10UH
L2	1-416-344-11	s	COIL, CHOKE 10UH
R1	1-211-985-11	s	RESISTOR,CHIP 47 1/10W (1608)
R2	1-211-985-11	s	RESISTOR,CHIP 47 1/10W (1608)
R3	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)
R4	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R5	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R6	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)
R7	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)
R8	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)

(CN-2621 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R9	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R10	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)
R11	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R13	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R15	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R16	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R18	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R20	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R27	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R28	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R29	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R30	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R31	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
RB1	1-234-380-11	s	RESISTOR,NETWORK 47KX4 (1005)
RB2	1-234-380-11	s	RESISTOR,NETWORK 47KX4 (1005)
RB3	1-234-380-11	s	RESISTOR,NETWORK 47KX4 (1005)
RB4	1-234-380-11	s	RESISTOR,NETWORK 47KX4 (1005)
RB5	1-234-375-21	s	RES, NETWORK 1KX4 (1005)
RB6	1-234-375-21	s	RES, NETWORK 1KX4 (1005)
RB7	1-234-375-21	s	RES, NETWORK 1KX4 (1005)
RB8	1-234-375-21	s	RES, NETWORK 1KX4 (1005)
S1	1-572-042-11	s	SWITCH,SLIDE (2-4-3)
S2	1-572-042-11	s	SWITCH,SLIDE (2-4-3)
S3	1-554-088-00	s	SWITCH,KEY BOARD

CN-2622 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
C1	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C2	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
CN1	1-817-322-21	s	PIN, CONNECTOR 12P
CN2	1-766-696-11	o	CONNECTOR, ROUND TYPE 8P
D1	8-719-046-87	s	DIODE F1J6

CN-2623 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
C1	1-119-869-91	s	CAPACITOR,CERAMIC CHIP 10MF
C2	1-119-869-91	s	CAPACITOR,CERAMIC CHIP 10MF
CN1	1-509-177-41	s	RECEPTACLE (4P),CONNECTOR
CN2	1-770-470-21	o	PIN, CONNECTOR (PC BOARD) 6P
FB1	1-414-772-11	s	INDUCTOR,MICRO(CHIP TYPE) 2012
FB2	1-414-772-11	s	INDUCTOR,MICRO(CHIP TYPE) 2012
FB3	1-414-772-11	s	INDUCTOR,MICRO(CHIP TYPE) 2012
FB4	1-414-772-11	s	INDUCTOR,MICRO(CHIP TYPE) 2012
FB5	1-414-772-11	s	INDUCTOR,MICRO(CHIP TYPE) 2012
FB6	1-414-772-11	s	INDUCTOR,MICRO(CHIP TYPE) 2012

CN-2640 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
C1	1-162-966-11	s	CAPACITOR,CERAMIC 2200PF/50V B
C2	1-162-966-11	s	CAPACITOR,CERAMIC 2200PF/50V B
CN1	1-770-623-21	s	PIN, CONNECTOR 6P
CN2	1-507-980-21	s	JACK (3.5MM)
FL1	1-239-895-11	s	FILTER, EMI (SMD)
FL2	1-239-895-11	s	FILTER, EMI (SMD)
L1	1-469-549-21	s	INDUCTOR, CHIP 1.0UH (LB2016)
R1	1-211-973-11	s	RESISTOR,CHIP 15 1/10W (1608)
R2	1-211-973-11	s	RESISTOR,CHIP 15 1/10W (1608)

CN-2671 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
C2	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C3	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C4	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C5	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
CN1	1-695-223-21	o	PIN,CONNECTOR (SMD) 10P
CN3	1-784-602-11	s	CONNECTOR, XLR (RECEPTACLE) 5P
FB1	1-414-445-11	s	FERRITE, EMI (SMD)
FB2	1-414-445-11	s	FERRITE, EMI (SMD)
FB3	1-414-445-11	s	FERRITE, EMI (SMD)
FB4	1-414-445-11	s	FERRITE, EMI (SMD)
R3	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R4	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R5	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R6	1-216-864-11	s	CONDUCTOR, CHIP (1608)

CN-2712 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1099-206-A	s	MOUNTED CIRCUIT BOARD, CN-2712
C1	1-135-342-11	s	CAPACITOR,SOLID ELECT 56MF
C2	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C3	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C4	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C5	1-125-889-11	s	CAPACITOR, CERAMIC 2.2MF
C6	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C7	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C8	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C9	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C10	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C11	1-135-343-11	s	CAPACITOR,SOLID ELECT 120MF
C12	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C13	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C15	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C16	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C17	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C18	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C19	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C20	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C21	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C22	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C23	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C24	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
CN2	1-764-441-61	s	CONNECTOR, FPC 30P
CN3	1-764-441-61	s	CONNECTOR, FPC 30P
CN4	1-764-441-61	s	CONNECTOR, FPC 30P
IC1	8-759-592-42	s	IC TC7SZ00FU(TE85R)
IC2	6-704-976-01	s	IC ADR381ART-REEL7
IC3	8-759-592-42	s	IC TC7SZ00FU(TE85R)
IC4	8-759-592-42	s	IC TC7SZ00FU(TE85R)
IC5	8-759-327-01	s	IC NJM062V-TE2
IC6	8-759-592-42	s	IC TC7SZ00FU(TE85R)
IC7	8-759-592-42	s	IC TC7SZ00FU(TE85R)
IC8	8-759-592-42	s	IC TC7SZ00FU(TE85R)
IC9	8-759-592-42	s	IC TC7SZ00FU(TE85R)
IC10	8-759-592-42	s	IC TC7SZ00FU(TE85R)
IC11	8-759-592-42	s	IC TC7SZ00FU(TE85R)
IC12	8-759-592-42	s	IC TC7SZ00FU(TE85R)
IC13	8-759-592-42	s	IC TC7SZ00FU(TE85R)
IC14	8-759-592-42	s	IC TC7SZ00FU(TE85R)
L1	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
Q1	8-729-143-13	s	TRANSISTOR 2SC4176-B34
Q2	8-729-230-27	s	TRANSISTOR 2SA1213Y-TE12L
R1	1-220-874-11	s	RES, CHIP 15 (1005)
R2	1-220-874-11	s	RES, CHIP 15 (1005)
R3	1-220-874-11	s	RES, CHIP 15 (1005)
R4	1-220-874-11	s	RES, CHIP 15 (1005)
R5	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R6	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R7	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R8	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R9	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R10	1-220-874-11	s	RES, CHIP 15 (1005)
R11	1-220-874-11	s	RES, CHIP 15 (1005)
R12	1-220-874-11	s	RES, CHIP 15 (1005)

(CN-2712 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R13	1-220-874-11	s	RES, CHIP 15 (1005)
R14	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R15	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R16	1-208-703-11	s	RESISTOR,CHIP 6.8K 1/16W(1005)
R17	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R18	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R19	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R20	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R21	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R22	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R23	1-208-663-11	s	RESISTOR CHIP 150 1/16W (1005)
R24	1-218-939-11	s	RESISTOR, CHIP 68 1/16W (1005)
R25	1-220-874-11	s	RES, CHIP 15 (1005)
R26	1-220-874-11	s	RES, CHIP 15 (1005)
R27	1-220-874-11	s	RES, CHIP 15 (1005)
R28	1-220-874-11	s	RES, CHIP 15 (1005)
R29	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R30	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R31	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R32	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)

CN-2723 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1159-995-A	s	MOUNTED CIRCUIT BOARD, CN-2723G (GOLD)
	A-1099-210-A	s	MOUNTED CIRCUIT BOARD, CN-2723 (SILVER)
CN1	1-779-522-31	s	CONNECTOR, FFC/FPC(ZIF) AN 40P (GOLD)
CN2	1-764-441-51	s	CONNECTOR, FPC 30P (GOLD)
	1-764-441-21	s	CONNECTOR, FPC (30P) (SILVER)

DAP-33 BOARD
---

*1: [Board No. suffix 12]
*2: [Board No. suffix 13-]

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1101-925-A	s	MOUNTED CIRCUIT BOARD, DAP-33
3pcs	3-729-061-01	s	SCREW (M2X4.5) (TYPE 1)(STEEL)
2pcs	4-654-273-02	s	ACE (M2), LOCK
BT1	⚠ 1-756-076-21	s	HOLDER, LITHIUM BATTERY
C1	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C2	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C5	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C7	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C8	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C10	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C11	1-165-884-91	s	CAPACITOR, CERAMIC 2.2MF(1608)
C12	1-165-884-91	s	CAPACITOR, CERAMIC 2.2MF(1608)
C13	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C21	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3216
C22	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C23	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C24	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3216
C25	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3216
C29	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C30	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C31	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C32	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C33	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C34	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C35	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C36	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C37	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C38	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3216
C39	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3216
C41	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3216
C42	1-119-923-11	s	CAPACITOR,CHIP CERAMIC 0.047MF
C43	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C44	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C45	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C46	1-119-923-11	s	CAPACITOR,CHIP CERAMIC 0.047MF
C47	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C48	1-107-819-11	s	CAP,CERAMIC 22000PF/16V(1005)
C49	1-164-936-11	s	CAPACITOR,CHIP CERAMIC 680PF
C50	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C51	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C52	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3216
C53	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C54	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C55	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C56	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C58	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C59	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C60	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C61	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C62	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C63	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C64	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C65	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C66	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C68	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(DAP-33 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C69	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C70	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C71	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C72	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C74	1-104-905-11	s	CAPACITOR DOUBLE LAYERS 0.22F
C75	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C76	1-100-5_7-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C77	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C201	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C202	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C203	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C204	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C205	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C206	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C207	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C208	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C209	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C210	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C211	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C212	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C213	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C214	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C215	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C216	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C217	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C220	1-164-858-11	s	CAPACITOR,CERAMIC 22PF/50V
C222	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C223	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C224	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C225	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C226	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C227	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C228	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C230	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C231	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C232	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C234	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C235	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C236	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C237	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C238	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C239	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C241	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C242	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C243	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C245	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C246	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C247	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C248	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C249	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C250	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C251	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C252	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C253	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C258	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C271	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C272	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C273	1-165-884-91	s	CAPACITOR, CERAMIC 2.2MF(1608)
C274	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V

(DAP-33 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C275	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C276	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C277	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C278	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C279	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C280	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C281	1-164-935-11	s	CAPACITOR,CHIP CERAMIC 470PF
C282	1-164-935-11	s	CAPACITOR,CHIP CERAMIC 470PF
C283	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C284	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C287	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C288	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C289	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C290	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C291	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C301	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C302	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C303	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C304	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C305	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C306	1-165-884-91	s	CAPACITOR, CERAMIC 2.2MF(1608)
C307	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C308	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C309	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C310	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C311	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C312	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C313	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C314	1-164-935-11	s	CAPACITOR,CHIP CERAMIC 470PF
C315	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C316	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C317	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C318	1-164-935-11	s	CAPACITOR,CHIP CERAMIC 470PF
C319	1-164-935-11	s	CAPACITOR,CHIP CERAMIC 470PF
C321	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C351	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C352	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C353	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C354	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C355	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C356	1-165-884-91	s	CAPACITOR, CERAMIC 2.2MF(1608)
C357	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C358	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C359	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C360	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C361	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C362	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C363	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C364	1-164-935-11	s	CAPACITOR,CHIP CERAMIC 470PF
C365	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C366	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C367	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C368	1-164-935-11	s	CAPACITOR,CHIP CERAMIC 470PF
C369	1-164-935-11	s	CAPACITOR,CHIP CERAMIC 470PF
C371	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C401	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C402	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C403	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C404	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V

(DAP-33 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C405	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C406	1-165-884-91	s	CAPACITOR, CERAMIC 2.2MF(1608)
C407	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C408	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C409	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C410	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C411	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C412	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C413	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C414	1-164-935-11	s	CAPACITOR,CHIP CERAMIC 470PF
C415	1-164-935-11	s	CAPACITOR,CHIP CERAMIC 470PF
C416	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C417	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C418	1-164-935-11	s	CAPACITOR,CHIP CERAMIC 470PF
C419	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C420	1-100-415-11	s	CAPACITOR,CERAMIC 0.47MF(1005)
C421	1-100-415-11	s	CAPACITOR,CERAMIC 0.47MF(1005)
C422	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C423	1-100-415-11	s	CAPACITOR,CERAMIC 0.47MF(1005)
C425	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C426	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C427	1-128-589-11	s	CAPACITOR ELECT 47MF/6.3V(105C
C428	1-128-589-11	s	CAPACITOR ELECT 47MF/6.3V(105C
C429	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C430	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C451	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C452	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C453	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C454	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C455	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C456	1-165-884-91	s	CAPACITOR, CERAMIC 2.2MF(1608)
C457	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C458	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C459	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C460	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C461	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C462	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C463	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C464	1-164-935-11	s	CAPACITOR,CHIP CERAMIC 470PF
C465	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C466	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C467	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C469	1-164-935-11	s	CAPACITOR,CHIP CERAMIC 470PF
C470	1-164-935-11	s	CAPACITOR,CHIP CERAMIC 470PF
C471	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C472	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C473	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C474	1-115-153-11	s	CAPACITOR,ELECT 4.7MF/16V(BP)
C475	1-115-153-11	s	CAPACITOR,ELECT 4.7MF/16V(BP)
C476	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C477	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
CN2	1-764-093-21	o	PIN, CONNECTOR (PC BOARD) 8P
D1	8-719-157-91	s	DIODE RD3.0SB
D2	8-719-017-03	s	DIODE 02DZ4.7-TPH3
D3	8-719-017-03	s	DIODE 02DZ4.7-TPH3
D52	8-719-820-41	s	DIODE 1SS302
D53	8-719-421-27	s	DIODE MA728

(DAP-33 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
D271	8-719-421-27	s	DIODE MA728
D272	8-719-421-27	s	DIODE MA728
D273	8-719-421-27	s	DIODE MA728
D274	8-719-421-27	s	DIODE MA728
D275	8-719-157-91	s	DIODE RD3.0SB
D276	8-719-157-91	s	DIODE RD3.0SB
D277	8-719-157-91	s	DIODE RD3.0SB
D278	8-719-157-91	s	DIODE RD3.0SB
D301	8-719-421-27	s	DIODE MA728
D302	8-719-421-27	s	DIODE MA728
D303	8-719-036-65	s	DIODE RD2.0SB-T1
D304	8-719-036-65	s	DIODE RD2.0SB-T1
D351	8-719-421-27	s	DIODE MA728
D352	8-719-421-27	s	DIODE MA728
D353	8-719-036-65	s	DIODE RD2.0SB-T1
D354	8-719-036-65	s	DIODE RD2.0SB-T1
D401	8-719-421-27	s	DIODE MA728
D402	8-719-421-27	s	DIODE MA728
D403	8-719-036-65	s	DIODE RD2.0SB-T1
D404	8-719-036-65	s	DIODE RD2.0SB-T1
D451	8-719-421-27	s	DIODE MA728
D452	8-719-421-27	s	DIODE MA728
D453	8-719-036-65	s	DIODE RD2.0SB-T1
D454	8-719-036-65	s	DIODE RD2.0SB-T1
D455	8-719-801-78	s	DIODE 1SS184
E1	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
E2	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
FB2	1-469-094-21	s	FERRITE, EMI (SMD)
FB3	1-469-094-21	s	FERRITE, EMI (SMD)
IC1	8-759-327-01	s	IC NJM062V-TE2
IC2	8-759-327-01	s	IC NJM062V-TE2
IC3	6-704-976-01	s	IC ADR381ART-REEL7
IC4	6-701-572-01	s	IC TPS54610PWPR
IC11	8-759-363-26	s	IC RN5VD28AA-TL
IC61	8-759-523-00	s	IC TC74HC4051AFT(EL)
IC62	8-759-327-01	s	IC NJM062V-TE2
IC63	8-759-327-01	s	IC NJM062V-TE2
IC64	8-759-327-01	s	IC NJM062V-TE2
IC75	8-759-644-10	s	IC MAX3491CSD+TG068
IC81	8-759-648-04	s	IC RTC4574JE-TP
IC82	8-759-648-61	s	IC LTC1387CG
IC83	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC84	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC202	6-700-387-01	s	IC EPC2LC20-TP
IC203	8-759-363-26	s	IC RN5VD28AA-TL
IC205	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC207	8-759-392-77	s	IC SN74LVC245APW (E20)
IC211	8-759-485-24	s	IC MC74HC4046ADT (R2)
IC212	8-759-327-01	s	IC NJM062V-TE2
IC213	8-759-675-47	s	IC SN74LVC04APWR
IC214	8-759-485-24	s	IC MC74HC4046ADT (R2)
IC271	6-702-527-01	s	IC AK5380VT-E2
IC272	8-759-278-58	s	IC NJM4558V (TE2)
IC273	8-759-278-58	s	IC NJM4558V (TE2)
IC274	8-759-675-47	s	IC SN74LVC04APWR
IC275	8-759-675-47	s	IC SN74LVC04APWR
IC276	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC301	6-700-563-01	s	IC AK4552VT-E2

(DAP-33 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC302	8-759-278-58	s	IC NJM4558V (TE2)
IC303	8-759-278-58	s	IC NJM4558V (TE2)
IC304	8-759-278-58	s	IC NJM4558V (TE2)
IC305	8-759-564-49	s	IC TC7W53FU-TE12R
IC306	8-759-564-49	s	IC TC7W53FU-TE12R
IC351	6-700-563-01	s	IC AK4552VT-E2
IC352	8-759-278-58	s	IC NJM4558V (TE2)
IC353	8-759-278-58	s	IC NJM4558V (TE2)
IC354	8-759-278-58	s	IC NJM4558V (TE2)
IC355	8-759-564-49	s	IC TC7W53FU-TE12R
IC356	8-759-564-49	s	IC TC7W53FU-TE12R
IC401	6-700-563-01	s	IC AK4552VT-E2
IC402	8-759-278-58	s	IC NJM4558V (TE2)
IC403	8-759-278-58	s	IC NJM4558V (TE2)
IC404	8-759-278-58	s	IC NJM4558V (TE2)
IC405	8-759-826-02	s	IC NJM2772V(TE2)
IC451	6-700-563-01	s	IC AK4552VT-E2
IC452	8-759-278-58	s	IC NJM4558V (TE2)
IC453	8-759-278-58	s	IC NJM4558V (TE2)
IC454	8-759-278-58	s	IC NJM4558V (TE2)
IC455	8-759-278-58	s	IC NJM4558V (TE2)
IC456	8-759-359-49	s	IC NJM3414AV (TE2)
IC457	8-759-564-49	s	IC TC7W53FU-TE12R
IC458	8-759-564-49	s	IC TC7W53FU-TE12R
L1	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L2	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L3	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L4	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L6	1-414-398-11	s	INDUCTOR (SMD) 10UH
L7	1-416-344-11	s	COIL, CHOKE 10UH
L8	1-414-398-11	s	INDUCTOR (SMD) 10UH
L9	1-414-398-11	s	INDUCTOR (SMD) 10UH
L52	1-414-398-11	s	INDUCTOR (SMD) 10UH
L201	1-414-398-11	s	INDUCTOR (SMD) 10UH
L202	1-414-398-11	s	INDUCTOR (SMD) 10UH
L203	1-414-398-11	s	INDUCTOR (SMD) 10UH
L204	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L205	1-414-398-11	s	INDUCTOR (SMD) 10UH
L206	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L252	1-414-398-11	s	INDUCTOR (SMD) 10UH
L301	1-414-398-11	s	INDUCTOR (SMD) 10UH
L351	1-414-398-11	s	INDUCTOR (SMD) 10UH
L401	1-414-398-11	s	INDUCTOR (SMD) 10UH
L402	1-414-398-11	s	INDUCTOR (SMD) 10UH
L451	1-414-398-11	s	INDUCTOR (SMD) 10UH
Q1	8-729-230-27	s	TRANSISTOR 2SA1213Y-TE12L
Q2	8-729-230-27	s	TRANSISTOR 2SA1213Y-TE12L
Q3	8-729-807-51	s	TRANSISTOR 2SD1623-S
Q11	8-729-928-81	s	TRANSISTOR DTC144EE
Q12	8-729-928-81	s	TRANSISTOR DTC144EE
Q13	8-729-928-81	s	TRANSISTOR DTC144EE
Q401	8-729-928-81	s	TRANSISTOR DTC144EE
Q403	8-729-053-44	s	TRANSISTOR 2SK880-Y-TE85R
Q404	8-729-053-44	s	TRANSISTOR 2SK880-Y-TE85R
R3	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R4	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R5	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R6	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)

(DAP-33 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R7	1-208-703-11	s	RESISTOR,CHIP 6.8K 1/16W(1005)
R8	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R11	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R12	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R21	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R22	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R23	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R24	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R25	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R26	1-208-931-11	s	RESISTOR, CHIP 68K (1005)
R27	1-208-931-11	s	RESISTOR, CHIP 68K (1005)
R28	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R31	1-208-931-11	s	RESISTOR, CHIP 68K (1005)
R32	1-208-931-11	s	RESISTOR, CHIP 68K (1005)
R33	1-208-931-11	s	RESISTOR, CHIP 68K (1005)
R34	1-208-931-11	s	RESISTOR, CHIP 68K (1005)
R41	1-208-931-11	s	RESISTOR, CHIP 68K (1005)
R44	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R45	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R47	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005
R48	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R49	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R50	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R51	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R55	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R56	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R60	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R61	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R62	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R63	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R64	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R65	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R66	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R67	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R68	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R69	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R70	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R71	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R72	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R73	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R74	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R75	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R76	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R78	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R79	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R80	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R81	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R82	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R83	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R84	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R85	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R86	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R88	1-208-931-11	s	RESISTOR, CHIP 68K (1005)
R89	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R90	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R91	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R92	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R93	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R94	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)

(DAP-33 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R95	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R96	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R97	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
*2 R200	1-208-635-11	s	METAL CHIP 10 0.5% 1/16W
R201	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R202	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R203	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R204	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R205	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R206	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R207	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R208	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R209	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R210	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R211	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R212	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R213	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R214	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R215	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R216	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R217	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R220	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R221	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R222	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R223	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R224	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R225	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R226	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R227	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R228	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R229	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R230	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R231	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R232	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R233	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R234	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R235	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R236	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R237	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R238	1-218-989-11	s	RESISTOR,CHIP 1M 1/16W (1005)
R240	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R241	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R242	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R243	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R244	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R245	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R246	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R247	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R248	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R249	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R250	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R251	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R252	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R253	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R254	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R255	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R256	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R257	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R258	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)

(DAP-33 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R259	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R260	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R261	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R262	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R263	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R265	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R266	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R267	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R268	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R269	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R271	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R272	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R273	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R274	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R275	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R276	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R277	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R278	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R279	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R280	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R281	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R282	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R283	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R284	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R285	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R286	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R287	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R291	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R292	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R301	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R302	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R303	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R304	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R305	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R306	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R307	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R308	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R309	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R310	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R311	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R312	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R313	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R314	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R315	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R316	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R318	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R319	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R320	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R321	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R322	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R351	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R352	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R353	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R354	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R355	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R356	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R357	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R358	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R359	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)

(DAP-33 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R360	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R361	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R362	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R363	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R364	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R365	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R366	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R368	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R369	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R370	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R371	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R372	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R401	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R402	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R403	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R404	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R405	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R406	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R407	1-208-679-11	s	RESISTOR CHIP 680 1/16W (1005)
R408	1-208-679-11	s	RESISTOR CHIP 680 1/16W (1005)
R409	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R410	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R411	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R412	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R413	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R414	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R415	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R416	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R417	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R418	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R419	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R420	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R421	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R423	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R424	1-208-943-11	s	RESISTOR CHIP 220K
R425	1-208-943-11	s	RESISTOR CHIP 220K
R426	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R427	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R451	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R452	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R453	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R454	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R455	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R456	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R457	1-208-679-11	s	RESISTOR CHIP 680 1/16W (1005)
R458	1-208-679-11	s	RESISTOR CHIP 680 1/16W (1005)
R459	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R460	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R461	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R462	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R463	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R464	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R465	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R466	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R467	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R468	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R469	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R470	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R471	1-208-911-11	s	RESISTOR, CHIP 10K (1005)

(DAP-33 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R472	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R473	1-208-943-11	s	RESISTOR CHIP 220K
R474	1-208-943-11	s	RESISTOR CHIP 220K
R475	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R476	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R477	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R478	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R479 *1	1-208-635-11	s	METAL CHIP 10 0.5% 1/16W
*2	1-208-643-11	s	METAL CHIP 22 0.5% 1/16W
R480 *1	1-208-635-11	s	METAL CHIP 10 0.5% 1/16W
*2	1-208-643-11	s	METAL CHIP 22 0.5% 1/16W
R481	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R482	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R484	1-218-989-11	s	RESISTOR,CHIP 1M 1/16W (1005)
R486	1-218-989-11	s	RESISTOR,CHIP 1M 1/16W (1005)
R487	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R488	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R489	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R490	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R491	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R492	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R493	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R494 *2	1-208-643-11	s	METAL CHIP 22 0.5% 1/16W
R495 *2	1-208-643-11	s	METAL CHIP 22 0.5% 1/16W
RB51	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB201	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB202	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB203	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB204	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB205	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB206	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB207	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB210	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB271	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB272	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB273	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB274	1-234-372-11	s	RES, NETWORK 100X4 (1005)
X1	1-813-253-12	s	OSCILLATOR, CRYSTAL
X2	1-813-253-12	s	OSCILLATOR, CRYSTAL

DPR-265 BOARD

---

*1: [Board No. suffix 11]
*2: [Board No. suffix 11, 13]
*3: [Board No. suffix 13-]
*4: [Board No. suffix 14-]

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1101-927-A	s	MOUNTED CIRCUIT BOARD, DPR-265
C11 *3	1-115-419-91	s	CERAMIC CHIP 3300PF 5.00% 25V
C12 *3	1-115-419-91	s	CERAMIC CHIP 3300PF 5.00% 25V
C57	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C58	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C59	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C60	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C61	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C101	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3216
C102	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3216
C103	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C104	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C105	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C106	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C107	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C108 *1	1-100-620-91	s	CERAMIC CHIP 47UF 20% 6.3V
*3	1-127-692-91	s	CERAMIC CHIP 10UF 10% 16V
C109	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C110	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C111	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C112	1-100-620-91	s	CAPACITOR, CHIP 47MF(3225)
C113	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C114	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C115	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C116	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C117	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C119	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C121	1-119-923-11	s	CAPACITOR,CHIP CERAMIC 0.047MF
C122	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C123	1-119-923-11	s	CAPACITOR,CHIP CERAMIC 0.047MF
C124	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C125	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C126	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C127	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C128	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C129	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C130	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C132	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C133	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C134	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C136	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C137	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C138	1-119-923-11	s	CAPACITOR,CHIP CERAMIC 0.047MF
C139	1-119-923-11	s	CAPACITOR,CHIP CERAMIC 0.047MF
C140	1-100-620-91	s	CAPACITOR, CHIP 47MF(3225)
C141	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C142	1-100-620-91	s	CAPACITOR, CHIP 47MF(3225)
C143	1-100-620-91	s	CAPACITOR, CHIP 47MF(3225)
C144	1-100-620-91	s	CAPACITOR, CHIP 47MF(3225)
C145	1-107-819-11	s	CAP,CERAMIC 22000PF/16V(1005)
C146	1-164-936-11	s	CAPACITOR,CHIP CERAMIC 680PF
C147	1-100-620-91	s	CAPACITOR, CHIP 47MF(3225)

(DPR-265 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C148	1-107-819-11	s	CAP,CERAMIC 22000PF/16V(1005)
C149	1-164-936-11	s	CAPACITOR,CHIP CERAMIC 680PF
C150	1-100-620-91	s	CAPACITOR, CHIP 47MF(3225)
C151	1-100-620-91	s	CAPACITOR, CHIP 47MF(3225)
C152	1-100-620-91	s	CAPACITOR, CHIP 47MF(3225)
C153	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C154	1-100-620-91	s	CAPACITOR, CHIP 47MF(3225)
C155	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C156	1-100-620-91	s	CAPACITOR, CHIP 47MF(3225)
C157	1-100-620-91	s	CAPACITOR, CHIP 47MF(3225)
C158	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C159	1-100-620-91	s	CAPACITOR, CHIP 47MF(3225)
C160	1-100-620-91	s	CAPACITOR, CHIP 47MF(3225)
C161	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C162	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C163	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C164	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C165	1-100-620-91	s	CAPACITOR, CHIP 47MF(3225)
C166	1-100-620-91	s	CAPACITOR, CHIP 47MF(3225)
C167	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C168	1-164-850-11	s	CAPACITOR,CHIP CERAMIC 10PF/50
C169	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C170	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C171	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C172	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C173	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C174	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C175	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C176	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C177	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C178	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C179	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C180	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C181	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C182	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C183	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C184	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C185	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C186	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C187	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C188	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C189	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C191	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C192	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C193	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C194	1-100-620-91	s	CAPACITOR, CHIP 47MF(3225)
C195	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C196	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C197	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C198	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C199	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C200	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C201	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C202	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C203	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C204	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C205	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C206	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C207	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V

(DPR-265 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C208	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C209	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C210	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C211	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C212	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C213	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C214	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C215	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C219	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C220	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C221	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C222	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C223	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C224	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C225	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C226	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C227	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C228	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C229	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C230	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C231	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C232	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C233	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C234	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C235	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C236	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C237	1-164-858-11	s	CAPACITOR,CERAMIC 22PF/50V
C238	1-164-858-11	s	CAPACITOR,CERAMIC 22PF/50V
C239	1-164-858-11	s	CAPACITOR,CERAMIC 22PF/50V
C240	1-164-840-11	s	CAPACITOR,CHIP CERAMIC 1.5PF
C241	1-164-840-11	s	CAPACITOR,CHIP CERAMIC 1.5PF
C242	1-164-840-11	s	CAPACITOR,CHIP CERAMIC 1.5PF
C243	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C244	1-164-840-11	s	CAPACITOR,CHIP CERAMIC 1.5PF
C245	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C246	1-164-840-11	s	CAPACITOR,CHIP CERAMIC 1.5PF
C247	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C248	1-164-840-11	s	CAPACITOR,CHIP CERAMIC 1.5PF
C249	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C250	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C251	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C252	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C253	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C254	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C255	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C256	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C257	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C258	1-100-742-91	s	CAP, CERAMIC 2.2MF C (1608)
C259	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C260	1-100-742-91	s	CAP, CERAMIC 2.2MF C (1608)
C261	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C262	1-100-742-91	s	CAP, CERAMIC 2.2MF C (1608)
C263	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C264	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C265	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C266	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C267	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C268	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C269	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216

(DPR-265 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C270	1-100-507-91	s	CAPACITOR,CERAMIC4.7MF C(1608)
C271	1-100-507-91	s	CAPACITOR,CERAMIC4.7MF C(1608)
C272	1-100-507-91	s	CAPACITOR,CERAMIC4.7MF C(1608)
C273	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C274	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C275	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C276	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C277	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C278	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C279	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C280	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C281	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C282	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C283	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C284	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C285	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C286	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C287	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C288	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C289	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C290	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C291	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C292	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C296	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C297	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C298	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C299	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C300	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C301	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C302	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C303	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C304	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C305	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C306	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C307	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C308	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C309	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C310	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C311	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C312	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C313	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C314	1-164-858-11	s	CAPACITOR,CERAMIC 22PF/50V
C315	1-164-858-11	s	CAPACITOR,CERAMIC 22PF/50V
C316	1-164-858-11	s	CAPACITOR,CERAMIC 22PF/50V
C317	1-164-840-11	s	CAPACITOR,CHIP CERAMIC 1.5PF
C318	1-164-840-11	s	CAPACITOR,CHIP CERAMIC 1.5PF
C319	1-164-840-11	s	CAPACITOR,CHIP CERAMIC 1.5PF
C320	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C321	1-164-840-11	s	CAPACITOR,CHIP CERAMIC 1.5PF
C322	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C323	1-164-840-11	s	CAPACITOR,CHIP CERAMIC 1.5PF
C324	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C325	1-164-840-11	s	CAPACITOR,CHIP CERAMIC 1.5PF
C326	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C327	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C328	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C329	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C330	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C331	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V

(DPR-265 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C332	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C333	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C334	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C335	1-100-742-91	s	CAP, CERAMIC 2.2MF C (1608)
C336	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C337	1-100-742-91	s	CAP, CERAMIC 2.2MF C (1608)
C338	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C339	1-100-742-91	s	CAP, CERAMIC 2.2MF C (1608)
C340	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C341	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C342	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C343	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C344	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C345	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C346	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C347	1-100-507-91	s	CAPACITOR,CERAMIC4.7MF C(1608)
C348	1-100-507-91	s	CAPACITOR,CERAMIC4.7MF C(1608)
C349	1-100-507-91	s	CAPACITOR,CERAMIC4.7MF C(1608)
C350	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C351	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C352	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C353	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C354	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C355	1-100-620-91	s	CAPACITOR, CHIP 47MF(3225)
C356	1-100-620-91	s	CAPACITOR, CHIP 47MF(3225)
C357	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C358	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C359	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C360	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C361	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C362	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C371	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C372	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C373	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C374	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C375	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C376	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C377	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C399	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C401	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C402	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C403	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C404	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C405	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C406	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C407	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C408	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C409	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C410	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C411	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C412	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C413	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C414	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C415	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C416	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C417	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C418	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C419	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C420	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005

(DPR-265 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C421	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C422	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C423	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C424	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C425	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C426	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C427	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C428	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C429	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C430	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C431	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C432	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C433	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C434	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C435	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C436	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C437	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C438	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C439	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C440	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C441	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C442	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C443	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C444	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C445	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C446	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C447	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C448	1-100-507-91	s	CAPACITOR,CERAMIC4.7MF C(1608)
C449	1-100-507-91	s	CAPACITOR,CERAMIC4.7MF C(1608)
C450	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C451	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C452	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C453	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C454	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C455	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C456	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C457	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C458	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C459	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C460	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C461	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C462	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C463	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C464	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C501	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C502	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C503	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C504	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C505	1-100-620-91	s	CAPACITOR, CHIP 47MF(3225)
C506	1-100-620-91	s	CAPACITOR, CHIP 47MF(3225)
C507	1-127-956-11	s	CAPACITOR,CHIP FILM 0.1MF
C508	1-127-956-11	s	CAPACITOR,CHIP FILM 0.1MF
C509	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C510	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C511	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C512	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C513	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C514	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C515	1-127-956-11	s	CAPACITOR,CHIP FILM 0.1MF

(DPR-265 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C516	1-127-956-11	s	CAPACITOR,CHIP FILM 0.1MF
C517	1-127-950-11	s	CAPACITOR,CHIP FILM 0.01MF
C518	1-127-950-11	s	CAPACITOR,CHIP FILM 0.01MF
C519	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C520	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C521	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C522	1-164-850-11	s	CAPACITOR,CHIP CERAMIC 10PF/50
C523	1-164-850-11	s	CAPACITOR,CHIP CERAMIC 10PF/50
C524	1-164-850-11	s	CAPACITOR,CHIP CERAMIC 10PF/50
C525	1-164-850-11	s	CAPACITOR,CHIP CERAMIC 10PF/50
C526	1-164-850-11	s	CAPACITOR,CHIP CERAMIC 10PF/50
C527	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C528	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C529	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C530	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C531	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C532	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C533	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C534	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C535	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C538	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C542	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C543	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C544	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C545	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C546	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C547	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C548	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C602	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C604	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C605	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C606	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C607	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C608	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C609	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C610	1-127-760-11	s	CAPACITOR,CERAMIC 4.7MF/6.3V
C611	1-127-760-11	s	CAPACITOR,CERAMIC 4.7MF/6.3V
C612	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C613	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C614	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C615	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C616	1-127-760-11	s	CAPACITOR,CERAMIC 4.7MF/6.3V
C617	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C618	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C619	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C620	1-127-760-11	s	CAPACITOR,CERAMIC 4.7MF/6.3V
C621	1-127-760-11	s	CAPACITOR,CERAMIC 4.7MF/6.3V
C622	1-127-760-11	s	CAPACITOR,CERAMIC 4.7MF/6.3V
C623	1-127-760-11	s	CAPACITOR,CERAMIC 4.7MF/6.3V
C624	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C625	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C626	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C627	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C628	1-100-620-91	s	CAPACITOR, CHIP 47MF(3225)
C629	1-127-760-11	s	CAPACITOR,CERAMIC 4.7MF/6.3V
C630	1-127-760-11	s	CAPACITOR,CERAMIC 4.7MF/6.3V
C631	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C632	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C633	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)

(DPR-265 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C634	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C701	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C702	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C703	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C704	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C705	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C706	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C707	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C708	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C709	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C710	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C711	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C712	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C713	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C714	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C715	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C716	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C717	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C718	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C719	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C720	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C721	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C722	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C723	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C724	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C727	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C728	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C729	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C730	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C731	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C732	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C733	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C734	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C735	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C736	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C737	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C738	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C739	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C740	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C741	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C742	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C743	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C744	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C745	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C746	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C747	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C748	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C749	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C752	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C753	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C754	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C755	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C756	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C757	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C758	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C759	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C760	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C761	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C762	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V

(DPR-265 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C763	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C764	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C765	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C766	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C767	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C768	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C769	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C770	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C771	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C772	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C773	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C774	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C775	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C776	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C777	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C778	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C788	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C789	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C790	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C791	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C792	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C793	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C794	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C795	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C796	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C797	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C798	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C799	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C800	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C801	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C802	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C803	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C804	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C805	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C806	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C807	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C808	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C809	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C810	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C820	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C821	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C822	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C823	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C824	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C825	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C826	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C827	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C828	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C829	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C830	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C831	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C832	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C833	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C834	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C835	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C836	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C837	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C838	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C839	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V

(DPR-265 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C840	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C841	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C842	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C843	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C844	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C845	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C846	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C847	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C848	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C849	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C850	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C851	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C852	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C853	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C854	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C855	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C856	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C857	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C858	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C865	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C866	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C867	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C868	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C869	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C870	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C871	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C872	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C873	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C874	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C875	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C876	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C877	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C878	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C879	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C880	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C881	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C882	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C883	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C884	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C885	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C886	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C887	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C888	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C889	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C890	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C891	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C892	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C896	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C897	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C900	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C901	1-107-819-11	s	CAP,CERAMIC 22000PF/16V(1005)
C902	1-107-819-11	s	CAP,CERAMIC 22000PF/16V(1005)
C903	1-107-819-11	s	CAP,CERAMIC 22000PF/16V(1005)
C904	1-107-819-11	s	CAP,CERAMIC 22000PF/16V(1005)
C905	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C906	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C907	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C908	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C909	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V

(DPR-265 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C910	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C911	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C912	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C913	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C914	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C915	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C916	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C917	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C918	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C919	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C920	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C921	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C922	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C923	1-107-819-11	s	CAP,CERAMIC 22000PF/16V(1005)
C924	1-107-819-11	s	CAP,CERAMIC 22000PF/16V(1005)
C925	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C926	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C927	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C928	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C929	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C930	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C931	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C932	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C933	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C934	1-107-819-11	s	CAP,CERAMIC 22000PF/16V(1005)
C935	1-107-819-11	s	CAP,CERAMIC 22000PF/16V(1005)
C936	1-107-819-11	s	CAP,CERAMIC 22000PF/16V(1005)
C937	1-107-819-11	s	CAP,CERAMIC 22000PF/16V(1005)
C938	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C939	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C940	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C941	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C942	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C943	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C944	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C945	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C946	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C947	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C948	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C949	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C950	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C951	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C952	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C953	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C954	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C955	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C956	1-107-819-11	s	CAP,CERAMIC 22000PF/16V(1005)
C957	1-107-819-11	s	CAP,CERAMIC 22000PF/16V(1005)
C958	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C959	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C960	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C961	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C962	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C963	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C964	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C965	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C966	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C967	1-107-819-11	s	CAP,CERAMIC 22000PF/16V(1005)
C968	1-107-819-11	s	CAP,CERAMIC 22000PF/16V(1005)

(DPR-265 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C969	1-107-819-11	s	CAP,CERAMIC 22000PF/16V(1005)
C970	1-107-819-11	s	CAP,CERAMIC 22000PF/16V(1005)
C971	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C972	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C973	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C974	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C975	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C976	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C977	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C978	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C979	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C980	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C981	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C982	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C983	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C984	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C985	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C986	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C987	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C988	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C989	1-107-819-11	s	CAP,CERAMIC 22000PF/16V(1005)
C990	1-107-819-11	s	CAP,CERAMIC 22000PF/16V(1005)
C991	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C992	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C993	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C994	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C995	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C996	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C997	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C998	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C999	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
CN601	1-764-243-11	o	CONNECTOR (COAXIAL)
D11	8-719-064-52	s	DIODE CL-191YG-CD-T
D102	8-719-017-03	s	DIODE 02DZ4.7-TPH3
D103	8-719-017-03	s	DIODE 02DZ4.7-TPH3
D104	8-719-820-41	s	DIODE 1SS302
D501	8-719-820-41	s	DIODE 1SS302
D502	8-719-820-41	s	DIODE 1SS302
D504	8-719-820-41	s	DIODE 1SS302
D505	8-719-820-41	s	DIODE 1SS302
D506	8-719-820-41	s	DIODE 1SS302
D507	8-719-820-41	s	DIODE 1SS302
E1	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
E2	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
FB101	1-469-094-21	s	FERRITE, EMI (SMD)
FB102	1-469-094-21	s	FERRITE, EMI (SMD)
FB103	1-469-094-21	s	FERRITE, EMI (SMD)
FB104	1-469-094-21	s	FERRITE, EMI (SMD)
FB105	1-469-094-21	s	FERRITE, EMI (SMD)
FB106	1-469-094-21	s	FERRITE, EMI (SMD)
FB107	1-469-094-21	s	FERRITE, EMI (SMD)
FB108	1-469-094-21	s	FERRITE, EMI (SMD)
FB501	1-469-094-21	s	FERRITE, EMI (SMD)
FB502	1-469-094-21	s	FERRITE, EMI (SMD)
FB503	1-469-094-21	s	FERRITE, EMI (SMD)
FB602	1-469-094-21	s	FERRITE, EMI (SMD)
FB603	1-469-094-21	s	FERRITE, EMI (SMD)

(DPR-265 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
FB604	1-469-094-21	s	FERRITE, EMI (SMD)
FB605	1-469-094-21	s	FERRITE, EMI (SMD)
FB606	1-469-094-21	s	FERRITE, EMI (SMD)
FB607	1-469-094-21	s	FERRITE, EMI (SMD)
FB608	1-469-094-21	s	FERRITE, EMI (SMD)
FB609	1-469-094-21	s	FERRITE, EMI (SMD)
FB610	1-469-094-21	s	FERRITE, EMI (SMD)
FB611	1-469-094-21	s	FERRITE, EMI (SMD)
FB612	1-469-094-21	s	FERRITE, EMI (SMD)
FB613	1-469-094-21	s	FERRITE, EMI (SMD)
FB901	1-469-094-21	s	FERRITE, EMI (SMD)
FB902	1-469-094-21	s	FERRITE, EMI (SMD)
FB903	1-469-094-21	s	FERRITE, EMI (SMD)
FB904	1-469-094-21	s	FERRITE, EMI (SMD)
FB905	1-469-094-21	s	FERRITE, EMI (SMD)
FB906	1-469-094-21	s	FERRITE, EMI (SMD)
FB907	1-469-094-21	s	FERRITE, EMI (SMD)
FB908	1-469-094-21	s	FERRITE, EMI (SMD)
FB909	1-469-094-21	s	FERRITE, EMI (SMD)
FB910	1-469-094-21	s	FERRITE, EMI (SMD)
FB911	1-469-094-21	s	FERRITE, EMI (SMD)
FB912	1-469-094-21	s	FERRITE, EMI (SMD)
FB913	1-469-094-21	s	FERRITE, EMI (SMD)
FB914	1-469-094-21	s	FERRITE, EMI (SMD)
FB915	1-469-094-21	s	FERRITE, EMI (SMD)
FB916	1-469-094-21	s	FERRITE, EMI (SMD)
FB917	1-469-094-21	s	FERRITE, EMI (SMD)
FB918	1-469-094-21	s	FERRITE, EMI (SMD)
FB919	1-469-094-21	s	FERRITE, EMI (SMD)
FB920	1-469-094-21	s	FERRITE, EMI (SMD)
FB921	1-469-094-21	s	FERRITE, EMI (SMD)
FB922	1-469-094-21	s	FERRITE, EMI (SMD)
FB923	1-469-094-21	s	FERRITE, EMI (SMD)
FB924	1-469-094-21	s	FERRITE, EMI (SMD)
FB925	1-469-094-21	s	FERRITE, EMI (SMD)
FB926	1-469-094-21	s	FERRITE, EMI (SMD)
FB927	1-469-094-21	s	FERRITE, EMI (SMD)
FL201	1-813-542-11	s	FILTER, LOW PASS
FL202	1-813-542-11	s	FILTER, LOW PASS
FL203	1-813-542-11	s	FILTER, LOW PASS
FL204	1-813-542-11	s	FILTER, LOW PASS
FL205	1-813-542-11	s	FILTER, LOW PASS
FL206	1-813-542-11	s	FILTER, LOW PASS
IC101	6-704-976-01	s	IC ADR381ART-REEL7
IC102	8-759-327-01	s	IC NJM062V-TE2
IC103	8-759-327-01	s	IC NJM062V-TE2
IC104	6-701-572-01	s	IC TPS54610PWPR
IC105	6-701-572-01	s	IC TPS54610PWPR
IC106	6-706-482-01	s	IC TC7SH00FU(T5RSOYJF)
IC107	8-759-392-77	s	IC SN74LVC245APW (E20)
IC108	8-759-392-77	s	IC SN74LVC245APW (E20)
IC110	8-759-346-27	s	IC LM45BIM3X
IC111	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC201	6-706-863-01	s	IC LMH6732MFX/NOPB
IC202	6-706-863-01	s	IC LMH6732MFX/NOPB
IC203	6-706-863-01	s	IC LMH6732MFX/NOPB
IC204	6-708-676-01	s	IC AD8138ARMZ-REEL7
IC205	6-708-676-01	s	IC AD8138ARMZ-REEL7

(DPR-265 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC206	6-708-676-01	s	IC AD8138ARMZ-REEL7
IC208	6-708-675-01	s	IC LTC2249IUH#TR-500
IC209	6-708-675-01	s	IC LTC2249IUH#TR-500
IC210	8-759-564-49	s	IC TC7W53FU-TE12R
IC211	8-759-564-49	s	IC TC7W53FU-TE12R
IC212	8-759-564-49	s	IC TC7W53FU-TE12R
IC213	6-706-863-01	s	IC LMH6732MFX/NOPB
IC214	6-706-863-01	s	IC LMH6732MFX/NOPB
IC215	6-706-863-01	s	IC LMH6732MFX/NOPB
IC216	6-708-676-01	s	IC AD8138ARMZ-REEL7
IC217	6-708-676-01	s	IC AD8138ARMZ-REEL7
IC218	6-708-676-01	s	IC AD8138ARMZ-REEL7
IC219	6-708-675-01	s	IC LTC2249IUH#TR-500
IC220	6-708-675-01	s	IC LTC2249IUH#TR-500
IC221	6-708-675-01	s	IC LTC2249IUH#TR-500
IC222	8-759-564-49	s	IC TC7W53FU-TE12R
IC223	8-759-564-49	s	IC TC7W53FU-TE12R
IC224	8-759-564-49	s	IC TC7W53FU-TE12R
IC225	8-759-327-01	s	IC NJM062V-TE2
IC226	8-759-327-01	s	IC NJM062V-TE2
IC227	8-759-327-01	s	IC NJM062V-TE2
IC228	8-759-327-01	s	IC NJM062V-TE2
IC230	6-700-915-01	s	IC SN74AHCT04PWR
IC231	6-700-915-01	s	IC SN74AHCT04PWR
IC232	6-708-675-01	s	IC LTC2249IUH#TR-500
IC302	6-700-804-01	s	IC SN74LVC574APWR
IC303	6-700-804-01	s	IC SN74LVC574APWR
IC304	6-700-804-01	s	IC SN74LVC574APWR
IC305	6-700-804-01	s	IC SN74LVC574APWR
IC306	6-700-804-01	s	IC SN74LVC574APWR
IC307	6-700-804-01	s	IC SN74LVC574APWR
IC308	6-700-804-01	s	IC SN74LVC574APWR
IC310	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC402	6-705-983-01	s	IC IS42S32200B-6TL-TR
IC403 *1	6-709-435-01	s	IC IS42S32200C1-6TL-TR
IC405 *3	6-709-435-01	s	IC IS42S32200C1-6TL-TR
IC501	8-759-485-24	s	IC MC74HC4046ADT (R2)
IC502	8-759-485-24	s	IC MC74HC4046ADT (R2)
IC503	8-759-564-49	s	IC TC7W53FU-TE12R
IC504	8-759-564-49	s	IC TC7W53FU-TE12R
IC505	8-759-564-49	s	IC TC7W53FU-TE12R
IC506	8-759-675-47	s	IC SN74LVC04APWR
IC507	8-759-675-47	s	IC SN74LVC04APWR
IC509	6-702-787-01	s	IC UPD6467GR-525-E2
IC510	6-702-787-01	s	IC UPD6467GR-525-E2
IC511	8-759-970-59	s	IC TLC272CPS
IC512	6-706-478-01	s	IC TC7SET08FU(T5RSOJF)
IC513	6-706-478-01	s	IC TC7SET08FU(T5RSOJF)
IC514	6-706-478-01	s	IC TC7SET08FU(T5RSOJF)
IC515	6-706-478-01	s	IC TC7SET08FU(T5RSOJF)
IC516	8-759-592-42	s	IC TC7SZ00FU(TE85R)
IC517	8-759-592-42	s	IC TC7SZ00FU(TE85R)
IC518	8-759-592-42	s	IC TC7SZ00FU(TE85R)
IC519	8-759-592-42	s	IC TC7SZ00FU(TE85R)
IC520	8-759-592-42	s	IC TC7SZ00FU(TE85R)
IC521	8-759-592-42	s	IC TC7SZ00FU(TE85R)
IC522	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC523	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC601	6-706-482-01	s	IC TC7SH00FU(T5RSOYJF)

(DPR-265 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC602	6-703-693-01	s	IC GS1532-CFE3
IC603	6-702-621-01	s	IC GS1528-CKAE3
IC604	6-700-655-01	s	IC LT1963ES8#TR
IC802	8-759-679-57	s	IC SN74LVC00APWR
IC803	8-759-592-42	s	IC TC7SZ00FU(TE85R)
IC804	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC805	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC901	6-706-350-01	s	IC EDD2516AKTA-6B-E
IC902	6-706-350-01	s	IC EDD2516AKTA-6B-E
IC903	6-706-350-01	s	IC EDD2516AKTA-6B-E
IC904	6-706-350-01	s	IC EDD2516AKTA-6B-E
IC905	6-706-350-01	s	IC EDD2516AKTA-6B-E
IC906	6-706-350-01	s	IC EDD2516AKTA-6B-E
L101	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L102	1-416-948-21	s	COIL, CHOKE (SMD)
L103	1-416-948-21	s	COIL, CHOKE (SMD)
L104	1-419-491-21	s	COIL, CHOKE 10UH
L105 *1	1-419-630-21	s	INDUCTOR 4.7UH
*3	1-414-392-41	s	INDUCTOR 1UH
L106 *3	1-414-392-41	s	INDUCTOR 1UH
L107	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L108	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L109	1-414-398-11	s	INDUCTOR (SMD) 10UH
L111	1-414-398-11	s	INDUCTOR (SMD) 10UH
L112	1-414-398-11	s	INDUCTOR (SMD) 10UH
L201	1-414-398-11	s	INDUCTOR (SMD) 10UH
L202	1-414-398-11	s	INDUCTOR (SMD) 10UH
L203	1-414-398-11	s	INDUCTOR (SMD) 10UH
L204	1-414-398-11	s	INDUCTOR (SMD) 10UH
L205	1-414-398-11	s	INDUCTOR (SMD) 10UH
L206	1-414-398-11	s	INDUCTOR (SMD) 10UH
L207	1-414-398-11	s	INDUCTOR (SMD) 10UH
L208	1-414-398-11	s	INDUCTOR (SMD) 10UH
L209	1-414-398-11	s	INDUCTOR (SMD) 10UH
L210	1-414-398-11	s	INDUCTOR (SMD) 10UH
L211	1-414-398-11	s	INDUCTOR (SMD) 10UH
L212	1-414-398-11	s	INDUCTOR (SMD) 10UH
L213	1-414-398-11	s	INDUCTOR (SMD) 10UH
L214	1-414-398-11	s	INDUCTOR (SMD) 10UH
L215	1-414-398-11	s	INDUCTOR (SMD) 10UH
L216	1-414-398-11	s	INDUCTOR (SMD) 10UH
L217	1-414-398-11	s	INDUCTOR (SMD) 10UH
L218	1-414-398-11	s	INDUCTOR (SMD) 10UH
L219	1-414-398-11	s	INDUCTOR (SMD) 10UH
L220	1-414-398-11	s	INDUCTOR (SMD) 10UH
L221	1-414-398-11	s	INDUCTOR (SMD) 10UH
L222	1-414-398-11	s	INDUCTOR (SMD) 10UH
L401	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L402	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L403	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L404	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L405	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L406	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L407	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L501	1-414-398-11	s	INDUCTOR (SMD) 10UH
L502	1-414-398-11	s	INDUCTOR (SMD) 10UH
L503	1-414-398-11	s	INDUCTOR (SMD) 10UH
L504	1-414-398-11	s	INDUCTOR (SMD) 10UH
L505	1-414-398-11	s	INDUCTOR (SMD) 10UH

(DPR-265 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
L506	1-414-398-11	s	INDUCTOR (SMD) 10UH
L507	1-414-398-11	s	INDUCTOR (SMD) 10UH
L508	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L509	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L510	1-414-398-11	s	INDUCTOR (SMD) 10UH
L511	1-414-398-11	s	INDUCTOR (SMD) 10UH
L512	1-414-398-11	s	INDUCTOR (SMD) 10UH
L601	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L602	1-414-457-11	s	INDUCTOR, CHIP (S) 3.3NH
L603	1-414-457-11	s	INDUCTOR, CHIP (S) 3.3NH
L801	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L802	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L803	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L804	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L805	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L806	1-414-398-11	s	INDUCTOR (SMD) 10UH
Q11	8-729-928-27	s	TRANSISTOR DTA144EE
Q101	8-729-230-27	s	TRANSISTOR 2SA1213Y-TE12L
Q102	8-729-230-27	s	TRANSISTOR 2SA1213Y-TE12L
Q103	8-729-807-51	s	TRANSISTOR 2SD1623-S
Q104	8-729-230-27	s	TRANSISTOR 2SA1213Y-TE12L
Q105	8-729-927-99	s	TRANSISTOR 2SC4617R
Q106	8-729-927-99	s	TRANSISTOR 2SC4617R
Q107	8-729-928-19	s	TRANSISTOR 2SA1774R
Q108	8-729-927-99	s	TRANSISTOR 2SC4617R
Q201	8-729-928-19	s	TRANSISTOR 2SA1774R
Q202	8-729-927-99	s	TRANSISTOR 2SC4617R
Q203	8-729-041-23	s	TRANSISTOR NDS356AP
Q204	8-729-041-24	s	TRANSISTOR NDS355AN
Q501	8-729-928-81	s	TRANSISTOR DTC144EE
Q502	8-729-928-81	s	TRANSISTOR DTC144EE
Q503	8-729-928-81	s	TRANSISTOR DTC144EE
Q504	8-729-928-19	s	TRANSISTOR 2SA1774R
Q505	8-729-928-19	s	TRANSISTOR 2SA1774R
Q506	8-729-928-19	s	TRANSISTOR 2SA1774R
Q507	8-729-928-19	s	TRANSISTOR 2SA1774R
Q601	8-729-927-99	s	TRANSISTOR 2SC4617R
Q602	8-729-041-23	s	TRANSISTOR NDS356AP
Q603	8-729-928-81	s	TRANSISTOR DTC144EE
Q604	8-729-928-19	s	TRANSISTOR 2SA1774R
R11 *3	1-220-230-91	s	METAL CHIP 2.2 10% 1/4W
R12 *3	1-220-230-91	s	METAL CHIP 2.2 10% 1/4W
R101	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R102	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R103	1-208-933-11	s	RESISTOR CHIP 82K
R104	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R105	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R106	1-218-953-11	s	RESISTOR, CHIP 1K 1/16W
R107	1-218-953-11	s	RESISTOR, CHIP 1K 1/16W
R108	1-218-977-11	s	RESISTOR,CHIP 100K 1/16W(1005)
R109	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R111	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R112	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R113	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R114	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R115	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R116	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R117	1-208-703-11	s	RESISTOR,CHIP 6.8K 1/16W(1005)

(DPR-265 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R118	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R119	1-218-973-11	s	RESISTOR,CHIP 47K 1/16W (1005)
R120	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R121	1-218-953-11	s	RESISTOR, CHIP 1K 1/16W
R122	1-218-965-11	s	RESISTOR, CHIP 10K 1/16W
R123	1-208-931-11	s	RESISTOR, CHIP 68K (1005)
R124	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005
R125	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005
R126	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R127	1-208-931-11	s	RESISTOR, CHIP 68K (1005)
R128	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R129	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R130	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R131	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R132	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R133	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R134	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R135	1-208-931-11	s	RESISTOR, CHIP 68K (1005)
R136	1-208-905-11	s	RESISTOR, CHIP 5.6K (1005)
R137	1-208-679-11	s	RESISTOR CHIP 680 1/16W (1005)
R138	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R141	1-218-937-11	s	RESISTOR, CHIP 47
R142	1-218-937-11	s	RESISTOR, CHIP 47
R143	1-218-937-11	s	RESISTOR, CHIP 47
R144	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R145	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R146	1-216-809-11	s	RESISTOR,CHIP 100 1/10W 1608
R147	1-216-809-11	s	RESISTOR,CHIP 100 1/10W 1608
R148	1-216-809-11	s	RESISTOR,CHIP 100 1/10W 1608
R149	1-216-809-11	s	RESISTOR,CHIP 100 1/10W 1608
R150	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R151	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R152	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R153	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R154	1-218-929-11	s	RESISTOR,CHIP 10 1/16W (1005)
R155	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R166	1-218-965-11	s	RESISTOR, CHIP 10K 1/16W
R167	1-218-965-11	s	RESISTOR, CHIP 10K 1/16W
R168	1-218-973-11	s	RESISTOR,CHIP 47K 1/16W (1005)
R169	1-208-931-11	s	RESISTOR, CHIP 68K (1005)
R170	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R171	1-208-679-11	s	RESISTOR CHIP 680 1/16W (1005)
R172	1-218-937-11	s	RESISTOR, CHIP 47
R173	1-218-973-11	s	RESISTOR,CHIP 47K 1/16W (1005)
R174	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R201	1-218-965-11	s	RESISTOR, CHIP 10K 1/16W
R202	1-218-965-11	s	RESISTOR, CHIP 10K 1/16W
R203	1-218-965-11	s	RESISTOR, CHIP 10K 1/16W
R204	1-208-679-11	s	RESISTOR CHIP 680 1/16W (1005)
R205	1-208-679-11	s	RESISTOR CHIP 680 1/16W (1005)
R206	1-208-679-11	s	RESISTOR CHIP 680 1/16W (1005)
R207	1-208-679-11	s	RESISTOR CHIP 680 1/16W (1005)
R208	1-208-679-11	s	RESISTOR CHIP 680 1/16W (1005)
R209	1-208-679-11	s	RESISTOR CHIP 680 1/16W (1005)
R210	1-218-937-11	s	RESISTOR, CHIP 47
R211	1-218-937-11	s	RESISTOR, CHIP 47
R212	1-218-937-11	s	RESISTOR, CHIP 47
R213	1-218-969-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R214	1-218-969-11	s	RESISTOR,CHIP 22K 1/16W (1005)

(DPR-265 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R215	1-218-969-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R216	1-218-973-11	s	RESISTOR,CHIP 47K 1/16W (1005)
R217	1-218-973-11	s	RESISTOR,CHIP 47K 1/16W (1005)
R218	1-218-973-11	s	RESISTOR,CHIP 47K 1/16W (1005)
R219	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R220	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R221	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R222	1-208-885-11	s	RESISTOR, CHIP 820 1/16W(1005)
R223	1-218-977-11	s	RESISTOR,CHIP 100K 1/16W(1005)
R224	1-208-885-11	s	RESISTOR, CHIP 820 1/16W(1005)
R225	1-218-977-11	s	RESISTOR,CHIP 100K 1/16W(1005)
R226	1-208-885-11	s	RESISTOR, CHIP 820 1/16W(1005)
R227	1-218-977-11	s	RESISTOR,CHIP 100K 1/16W(1005)
R228	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R229	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R230	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R234	1-218-961-11	s	RESISTOR, CHIP 4.7K 1/16W
R235	1-218-961-11	s	RESISTOR, CHIP 4.7K 1/16W
R236	1-218-961-11	s	RESISTOR, CHIP 4.7K 1/16W
R237	1-208-679-11	s	RESISTOR CHIP 680 1/16W (1005)
R238	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R239	1-208-679-11	s	RESISTOR CHIP 680 1/16W (1005)
R240	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R241	1-208-679-11	s	RESISTOR CHIP 680 1/16W (1005)
R242	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R243	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R244	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R245	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R246	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R247	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R248	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R249	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R250	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R251	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R252	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R253	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R254	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R255	1-218-953-11	s	RESISTOR, CHIP 1K 1/16W
R256	1-218-953-11	s	RESISTOR, CHIP 1K 1/16W
R257	1-218-953-11	s	RESISTOR, CHIP 1K 1/16W
R258	1-216-803-11	s	RESISTOR,CHIP 33 1/10W (1608)
R259	1-216-803-11	s	RESISTOR,CHIP 33 1/10W (1608)
R260	1-216-803-11	s	RESISTOR,CHIP 33 1/10W (1608)
R261	1-216-803-11	s	RESISTOR,CHIP 33 1/10W (1608)
R262	1-216-803-11	s	RESISTOR,CHIP 33 1/10W (1608)
R263	1-216-803-11	s	RESISTOR,CHIP 33 1/10W (1608)
R264	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R265	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R266	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R273	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R274	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R275	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R276	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R277	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R278	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R279	1-218-953-11	s	RESISTOR, CHIP 1K 1/16W
R280	1-218-953-11	s	RESISTOR, CHIP 1K 1/16W
R281	1-218-953-11	s	RESISTOR, CHIP 1K 1/16W
R282	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)

(DPR-265 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R283	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R284	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R285	1-218-957-11	s	RESISTOR,CHIP 2.2K 1/16W(1005)
R286	1-218-957-11	s	RESISTOR,CHIP 2.2K 1/16W(1005)
R287	1-218-957-11	s	RESISTOR,CHIP 2.2K 1/16W(1005)
R288	1-218-965-11	s	RESISTOR, CHIP 10K 1/16W
R289	1-218-965-11	s	RESISTOR, CHIP 10K 1/16W
R290	1-218-965-11	s	RESISTOR, CHIP 10K 1/16W
R291	1-218-965-11	s	RESISTOR, CHIP 10K 1/16W
R292	1-218-965-11	s	RESISTOR, CHIP 10K 1/16W
R293	1-218-965-11	s	RESISTOR, CHIP 10K 1/16W
R294	1-218-965-11	s	RESISTOR, CHIP 10K 1/16W
R295	1-218-965-11	s	RESISTOR, CHIP 10K 1/16W
R296	1-218-965-11	s	RESISTOR, CHIP 10K 1/16W
R297	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R298	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R299	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R300	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R301	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R302	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R309	1-218-965-11	s	RESISTOR, CHIP 10K 1/16W
R310	1-218-965-11	s	RESISTOR, CHIP 10K 1/16W
R311	1-218-965-11	s	RESISTOR, CHIP 10K 1/16W
R312	1-208-679-11	s	RESISTOR CHIP 680 1/16W (1005)
R313	1-208-679-11	s	RESISTOR CHIP 680 1/16W (1005)
R314	1-208-679-11	s	RESISTOR CHIP 680 1/16W (1005)
R315	1-208-679-11	s	RESISTOR CHIP 680 1/16W (1005)
R316	1-208-679-11	s	RESISTOR CHIP 680 1/16W (1005)
R317	1-208-679-11	s	RESISTOR CHIP 680 1/16W (1005)
R318	1-218-937-11	s	RESISTOR, CHIP 47
R319	1-218-937-11	s	RESISTOR, CHIP 47
R320	1-218-937-11	s	RESISTOR, CHIP 47
R321	1-218-969-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R322	1-218-969-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R323	1-218-969-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R324	1-218-973-11	s	RESISTOR,CHIP 47K 1/16W (1005)
R325	1-218-973-11	s	RESISTOR,CHIP 47K 1/16W (1005)
R326	1-218-973-11	s	RESISTOR,CHIP 47K 1/16W (1005)
R327	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R328	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R329	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R330	1-208-885-11	s	RESISTOR, CHIP 820 1/16W(1005)
R331	1-218-977-11	s	RESISTOR,CHIP 100K 1/16W(1005)
R332	1-208-885-11	s	RESISTOR, CHIP 820 1/16W(1005)
R333	1-218-977-11	s	RESISTOR,CHIP 100K 1/16W(1005)
R334	1-208-885-11	s	RESISTOR, CHIP 820 1/16W(1005)
R335	1-218-977-11	s	RESISTOR,CHIP 100K 1/16W(1005)
R336	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R337	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R338	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R342	1-218-961-11	s	RESISTOR, CHIP 4.7K 1/16W
R343	1-218-961-11	s	RESISTOR, CHIP 4.7K 1/16W
R344	1-218-961-11	s	RESISTOR, CHIP 4.7K 1/16W
R345	1-208-679-11	s	RESISTOR CHIP 680 1/16W (1005)
R346	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R347	1-208-679-11	s	RESISTOR CHIP 680 1/16W (1005)
R348	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R349	1-208-679-11	s	RESISTOR CHIP 680 1/16W (1005)
R350	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)

(DPR-265 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R351	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R352	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R353	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R354	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R355	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R356	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R357	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R358	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R359	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R360	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R361	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R362	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R363	1-218-953-11	s	RESISTOR, CHIP 1K 1/16W
R364	1-218-953-11	s	RESISTOR, CHIP 1K 1/16W
R365	1-218-953-11	s	RESISTOR, CHIP 1K 1/16W
R366	1-216-803-11	s	RESISTOR,CHIP 33 1/10W (1608)
R367	1-216-803-11	s	RESISTOR,CHIP 33 1/10W (1608)
R368	1-216-803-11	s	RESISTOR,CHIP 33 1/10W (1608)
R369	1-216-803-11	s	RESISTOR,CHIP 33 1/10W (1608)
R370	1-216-803-11	s	RESISTOR,CHIP 33 1/10W (1608)
R371	1-216-803-11	s	RESISTOR,CHIP 33 1/10W (1608)
R372	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R373	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R374	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R381	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R382	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R383	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R384	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R385	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R386	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R387	1-218-965-11	s	RESISTOR, CHIP 10K 1/16W
R388	1-218-965-11	s	RESISTOR, CHIP 10K 1/16W
R389	1-218-965-11	s	RESISTOR, CHIP 10K 1/16W
R390	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R391	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R392	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R393	1-218-957-11	s	RESISTOR,CHIP 2.2K 1/16W(1005)
R394	1-218-957-11	s	RESISTOR,CHIP 2.2K 1/16W(1005)
R395	1-218-957-11	s	RESISTOR,CHIP 2.2K 1/16W(1005)
R396	1-218-965-11	s	RESISTOR, CHIP 10K 1/16W
R397	1-218-965-11	s	RESISTOR, CHIP 10K 1/16W
R398	1-218-965-11	s	RESISTOR, CHIP 10K 1/16W
R399	1-218-973-11	s	RESISTOR,CHIP 47K 1/16W (1005)
R400	1-218-973-11	s	RESISTOR,CHIP 47K 1/16W (1005)
R401	1-208-931-11	s	RESISTOR, CHIP 68K (1005)
R402	1-208-931-11	s	RESISTOR, CHIP 68K (1005)
R403	1-208-931-11	s	RESISTOR, CHIP 68K (1005)
R404	1-218-973-11	s	RESISTOR,CHIP 47K 1/16W (1005)
R405	1-208-931-11	s	RESISTOR, CHIP 68K (1005)
R406	1-218-965-11	s	RESISTOR, CHIP 10K 1/16W
R407	1-218-965-11	s	RESISTOR, CHIP 10K 1/16W
R408	1-218-965-11	s	RESISTOR, CHIP 10K 1/16W
R409	1-218-965-11	s	RESISTOR, CHIP 10K 1/16W
R410	1-218-965-11	s	RESISTOR, CHIP 10K 1/16W
R411	1-218-965-11	s	RESISTOR, CHIP 10K 1/16W
R412	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R413	1-218-965-11	s	RESISTOR, CHIP 10K 1/16W
R414	1-218-965-11	s	RESISTOR, CHIP 10K 1/16W
R415	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)

(DPR-265 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R416	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R417	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R418	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R419	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R432	1-208-905-11	s	RESISTOR, CHIP 5.6K (1005)
R433	1-208-905-11	s	RESISTOR, CHIP 5.6K (1005)
R434	1-208-905-11	s	RESISTOR, CHIP 5.6K (1005)
R435	1-208-905-11	s	RESISTOR, CHIP 5.6K (1005)
R436	1-208-905-11	s	RESISTOR, CHIP 5.6K (1005)
R437	1-208-905-11	s	RESISTOR, CHIP 5.6K (1005)
R451	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R452	1-218-937-11	s	RESISTOR, CHIP 47
R453	1-218-937-11	s	RESISTOR, CHIP 47
R454	1-218-937-11	s	RESISTOR, CHIP 47
R456	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R457	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R458	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R459	1-218-937-11	s	RESISTOR, CHIP 47
R460	1-218-937-11	s	RESISTOR, CHIP 47
R461	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R462	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R463	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R464	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R465	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R466	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R467	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R468	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R469	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R470	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R471	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R472	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R473	1-218-953-11	s	RESISTOR, CHIP 1K 1/16W
R474	*2 1-218-953-81	s	RES-CHIP 1K 5% 1/16W
	*4 1-218-973-81	s	RES-CHIP 47K 5% 1/16W
R475	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R476	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R478	*4 1-218-973-81	s	RES-CHIP 47K 5% 1/16W
R479	*4 1-218-973-81	s	RES-CHIP 47K 5% 1/16W
R480	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R481	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R482	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R501	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R502	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R503	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R504	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R505	1-218-957-11	s	RESISTOR,CHIP 2.2K 1/16W(1005)
R506	1-218-957-11	s	RESISTOR,CHIP 2.2K 1/16W(1005)
R507	1-218-957-11	s	RESISTOR,CHIP 2.2K 1/16W(1005)
R508	1-218-957-11	s	RESISTOR,CHIP 2.2K 1/16W(1005)
R510	1-218-973-11	s	RESISTOR,CHIP 47K 1/16W (1005)
R511	1-218-965-11	s	RESISTOR, CHIP 10K 1/16W
R512	1-218-965-11	s	RESISTOR, CHIP 10K 1/16W
R513	1-218-957-11	s	RESISTOR,CHIP 2.2K 1/16W(1005)
R514	1-218-957-11	s	RESISTOR,CHIP 2.2K 1/16W(1005)
R515	1-218-977-11	s	RESISTOR,CHIP 100K 1/16W(1005)
R516	1-218-973-11	s	RESISTOR,CHIP 47K 1/16W (1005)
R517	1-218-973-11	s	RESISTOR,CHIP 47K 1/16W (1005)
R518	1-218-973-11	s	RESISTOR,CHIP 47K 1/16W (1005)
R519	1-218-953-11	s	RESISTOR, CHIP 1K 1/16W

(DPR-265 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R520	1-218-973-11	s	RESISTOR,CHIP 47K 1/16W (1005)
R521	1-218-957-11	s	RESISTOR,CHIP 2.2K 1/16W(1005)
R522	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R523	1-218-965-11	s	RESISTOR, CHIP 10K 1/16W
R524	1-218-965-11	s	RESISTOR, CHIP 10K 1/16W
R525	1-218-977-11	s	RESISTOR,CHIP 100K 1/16W(1005)
R526	1-218-973-11	s	RESISTOR,CHIP 47K 1/16W (1005)
R527	1-218-965-11	s	RESISTOR, CHIP 10K 1/16W
R528	1-218-953-11	s	RESISTOR, CHIP 1K 1/16W
R529	1-218-961-11	s	RESISTOR, CHIP 4.7K 1/16W
R530	1-218-957-11	s	RESISTOR,CHIP 2.2K 1/16W(1005)
R531	1-218-965-11	s	RESISTOR, CHIP 10K 1/16W
R532	1-218-965-11	s	RESISTOR, CHIP 10K 1/16W
R533	1-218-965-11	s	RESISTOR, CHIP 10K 1/16W
R534	1-218-977-11	s	RESISTOR,CHIP 100K 1/16W(1005)
R535	1-208-933-11	s	RESISTOR CHIP 82K
R536	1-218-937-11	s	RESISTOR, CHIP 47
R537	1-218-965-11	s	RESISTOR, CHIP 10K 1/16W
R538	1-218-929-11	s	RESISTOR,CHIP 10 1/16W (1005)
R539	1-218-965-11	s	RESISTOR, CHIP 10K 1/16W
R540	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R541	1-218-929-11	s	RESISTOR,CHIP 10 1/16W (1005)
R542	1-218-965-11	s	RESISTOR, CHIP 10K 1/16W
R543	1-218-929-11	s	RESISTOR,CHIP 10 1/16W (1005)
R544	1-218-969-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R545	1-218-929-11	s	RESISTOR,CHIP 10 1/16W (1005)
R546	1-218-989-11	s	RESISTOR,CHIP 1M 1/16W (1005)
R547	1-218-953-11	s	RESISTOR, CHIP 1K 1/16W
R548	1-218-965-11	s	RESISTOR, CHIP 10K 1/16W
R549	1-218-965-11	s	RESISTOR, CHIP 10K 1/16W
R550	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R551	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R552	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R553	1-218-965-11	s	RESISTOR, CHIP 10K 1/16W
R554	1-218-965-11	s	RESISTOR, CHIP 10K 1/16W
R555	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R556	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R557	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R558	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R559	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R560	1-218-929-11	s	RESISTOR,CHIP 10 1/16W (1005)
R561	1-218-929-11	s	RESISTOR,CHIP 10 1/16W (1005)
R562	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R563	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R564	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R565	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R567	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R568	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R571	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R572	1-218-957-11	s	RESISTOR,CHIP 2.2K 1/16W(1005)
R573	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R574	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R575	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R576	1-218-957-11	s	RESISTOR,CHIP 2.2K 1/16W(1005)
R577	1-218-957-11	s	RESISTOR,CHIP 2.2K 1/16W(1005)
R578	1-218-973-11	s	RESISTOR,CHIP 47K 1/16W (1005)
R579	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R580	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R581	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)

(DPR-265 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R582	1-218-965-11	s	RESISTOR, CHIP 10K 1/16W
R583	1-218-965-11	s	RESISTOR, CHIP 10K 1/16W
R584	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R585	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R602	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R603	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R604	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R605	1-218-973-11	s	RESISTOR,CHIP 47K 1/16W (1005)
R606	1-218-937-11	s	RESISTOR, CHIP 47
R607	1-218-953-11	s	RESISTOR, CHIP 1K 1/16W
R608	1-218-953-11	s	RESISTOR, CHIP 1K 1/16W
R609	1-218-965-11	s	RESISTOR, CHIP 10K 1/16W
R610	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R611	1-218-973-11	s	RESISTOR,CHIP 47K 1/16W (1005)
R612	1-218-973-11	s	RESISTOR,CHIP 47K 1/16W (1005)
R613	1-218-973-11	s	RESISTOR,CHIP 47K 1/16W (1005)
R614	1-218-953-11	s	RESISTOR, CHIP 1K 1/16W
R615	1-218-953-11	s	RESISTOR, CHIP 1K 1/16W
R616	1-218-953-11	s	RESISTOR, CHIP 1K 1/16W
R618	1-208-873-11	s	RESISTOR,CHIP 270 1/16W (1005)
R619	1-218-973-11	s	RESISTOR,CHIP 47K 1/16W (1005)
R620	1-218-953-11	s	RESISTOR, CHIP 1K 1/16W
R621	1-218-953-11	s	RESISTOR, CHIP 1K 1/16W
R622	1-218-953-11	s	RESISTOR, CHIP 1K 1/16W
R623	1-218-953-11	s	RESISTOR, CHIP 1K 1/16W
R624	1-218-953-11	s	RESISTOR, CHIP 1K 1/16W
R625	1-218-953-11	s	RESISTOR, CHIP 1K 1/16W
R626	1-218-953-11	s	RESISTOR, CHIP 1K 1/16W
R627	1-218-953-11	s	RESISTOR, CHIP 1K 1/16W
R628	1-218-973-11	s	RESISTOR,CHIP 47K 1/16W (1005)
R629	1-218-973-11	s	RESISTOR,CHIP 47K 1/16W (1005)
R630	1-211-990-11	s	RESISTOR,CHIP 75 1/10W (1608)
R631	1-211-990-11	s	RESISTOR,CHIP 75 1/10W (1608)
R632	1-211-990-11	s	RESISTOR,CHIP 75 1/10W (1608)
R633	1-211-990-11	s	RESISTOR,CHIP 75 1/10W (1608)
R634	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005
R635	1-218-953-11	s	RESISTOR, CHIP 1K 1/16W
R636	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005
R637	1-218-973-11	s	RESISTOR,CHIP 47K 1/16W (1005)
R638	1-218-953-11	s	RESISTOR, CHIP 1K 1/16W
R639	1-218-973-11	s	RESISTOR,CHIP 47K 1/16W (1005)
R640	1-218-973-11	s	RESISTOR,CHIP 47K 1/16W (1005)
R641	1-218-965-11	s	RESISTOR, CHIP 10K 1/16W
R642	1-211-990-11	s	RESISTOR,CHIP 75 1/10W (1608)
R643	1-211-990-11	s	RESISTOR,CHIP 75 1/10W (1608)
R644	1-218-969-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R645	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R646	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R647	1-218-957-11	s	RESISTOR,CHIP 2.2K 1/16W(1005)
R648	1-218-957-11	s	RESISTOR,CHIP 2.2K 1/16W(1005)
R649	1-218-957-11	s	RESISTOR,CHIP 2.2K 1/16W(1005)
R650	1-218-973-11	s	RESISTOR,CHIP 47K 1/16W (1005)
R651	1-211-990-11	s	RESISTOR,CHIP 75 1/10W (1608)
R652	1-218-977-11	s	RESISTOR,CHIP 100K 1/16W(1005)
R653	1-218-973-11	s	RESISTOR,CHIP 47K 1/16W (1005)
R654	1-218-973-11	s	RESISTOR,CHIP 47K 1/16W (1005)
R801	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R802	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R803	*2 1-218-941-81	s	RES-CHIP 100 5% 1/16W

(DPR-265 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R804 *2	1-218-941-81	s	RES-CHIP 100 5% 1/16W
R805	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R806	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R807	1-218-957-11	s	RESISTOR,CHIP 2.2K 1/16W(1005)
R808	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R810	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R811	1-218-957-11	s	RESISTOR,CHIP 2.2K 1/16W(1005)
R812	1-218-937-11	s	RESISTOR, CHIP 47
R813	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R814	1-218-953-11	s	RESISTOR, CHIP 1K 1/16W
R815	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R816	1-218-929-11	s	RESISTOR,CHIP 10 1/16W (1005)
R817	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R818	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R819	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R820	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R821	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R822	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R823	1-218-965-11	s	RESISTOR, CHIP 10K 1/16W
R824	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R825 *3	1-218-941-81	s	RES-CHIP 100 5% 1/16W
R901	1-218-965-11	s	RESISTOR, CHIP 10K 1/16W
R902	1-218-965-11	s	RESISTOR, CHIP 10K 1/16W
R903	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R904	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R905	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R906	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R907	1-218-965-11	s	RESISTOR, CHIP 10K 1/16W
R908	1-218-965-11	s	RESISTOR, CHIP 10K 1/16W
R909	1-218-965-11	s	RESISTOR, CHIP 10K 1/16W
R910	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R911	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R912	1-218-965-11	s	RESISTOR, CHIP 10K 1/16W
R913	1-218-965-11	s	RESISTOR, CHIP 10K 1/16W
R914	1-218-965-11	s	RESISTOR, CHIP 10K 1/16W
R915	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R916	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R917	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R918	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R919	1-218-965-11	s	RESISTOR, CHIP 10K 1/16W
R920	1-218-965-11	s	RESISTOR, CHIP 10K 1/16W
R921	1-218-965-11	s	RESISTOR, CHIP 10K 1/16W
R922	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R923	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R924	1-218-965-11	s	RESISTOR, CHIP 10K 1/16W
R925	1-218-965-11	s	RESISTOR, CHIP 10K 1/16W
R926	1-218-965-11	s	RESISTOR, CHIP 10K 1/16W
R927	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R928	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R929	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R930	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R931	1-218-965-11	s	RESISTOR, CHIP 10K 1/16W
R932	1-218-965-11	s	RESISTOR, CHIP 10K 1/16W
R933	1-218-965-11	s	RESISTOR, CHIP 10K 1/16W
R934	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R935	1-218-941-81	s	RESISTOR,CHIP 100,1/16W (1005)
R936	1-218-965-11	s	RESISTOR, CHIP 10K 1/16W
RB101	1-234-380-11	s	RESISTOR,NETWORK 47KX4 (1005)

(DPR-265 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB102	1-234-380-11	s	RESISTOR,NETWORK 47KX4 (1005)
RB103	1-234-380-11	s	RESISTOR,NETWORK 47KX4 (1005)
RB104	1-234-380-11	s	RESISTOR,NETWORK 47KX4 (1005)
RB105	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB106	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB107	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB108	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB110	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB111	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB112	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB113	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB301	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB302	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB303	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB304	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB306	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB307	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB308	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB309	1-234-373-21	s	RES, NETWORK 220X4 (1005)
RB310	1-234-373-21	s	RES, NETWORK 220X4 (1005)
RB311	1-234-373-21	s	RES, NETWORK 220X4 (1005)
RB312	1-234-373-21	s	RES, NETWORK 220X4 (1005)
RB313	1-234-373-21	s	RES, NETWORK 220X4 (1005)
RB314	1-234-373-21	s	RES, NETWORK 220X4 (1005)
RB316	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB317	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB318	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB320	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB321	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB322	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB323	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB324	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB325	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB326	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB327	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB328	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB329	1-234-373-21	s	RES, NETWORK 220X4 (1005)
RB330	1-234-373-21	s	RES, NETWORK 220X4 (1005)
RB331	1-234-373-21	s	RES, NETWORK 220X4 (1005)
RB332	1-234-373-21	s	RES, NETWORK 220X4 (1005)
RB333	1-234-373-21	s	RES, NETWORK 220X4 (1005)
RB334	1-234-373-21	s	RES, NETWORK 220X4 (1005)
RB336	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB337	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB338	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB340	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB341	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB342	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB343	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB344	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB345	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB346	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB347	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB348	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB349	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB350	1-234-380-11	s	RESISTOR,NETWORK 47KX4 (1005)
RB351	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB352	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB353	1-234-372-11	s	RES, NETWORK 100X4 (1005)

(DPR-265 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB354	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB355	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB356	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB357	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB358	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB359	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB360	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB361	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB362	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB363	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB364	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB365	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB366	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB367	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB368	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB369	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB370	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB371	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB372	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB373	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB374	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB375	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB376	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB377	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB378	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB379	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB402	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB403	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB404	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB405	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB406	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB407	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB408	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB409	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB410	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB411	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB412	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB413	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB414	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB415	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB416	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB417	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB418	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB419	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB420	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB421	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB422	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB423	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB424	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB425	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB426	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB427	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB501	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB502	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB503	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB504	1-234-378-11	s	RES, NETWORK 10KX4 (1005)
RB505	1-234-369-21	s	RES, NETWORK 10X4 (1005)
RB506	1-234-369-21	s	RES, NETWORK 10X4 (1005)
RB601	1-234-372-11	s	RES, NETWORK 100X4 (1005)

(DPR-265 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB602	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB603	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB604	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB605	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB606	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB801	1-234-373-21	s	RES, NETWORK 220X4 (1005)
RB802	1-234-373-21	s	RES, NETWORK 220X4 (1005)
RB803	1-234-373-21	s	RES, NETWORK 220X4 (1005)
RB804	1-234-373-21	s	RES, NETWORK 220X4 (1005)
RB805	1-234-373-21	s	RES, NETWORK 220X4 (1005)
RB806	1-234-373-21	s	RES, NETWORK 220X4 (1005)
RB807	1-234-373-21	s	RES, NETWORK 220X4 (1005)
RB809	1-234-373-21	s	RES, NETWORK 220X4 (1005)
RB810	1-234-373-21	s	RES, NETWORK 220X4 (1005)
RB811	1-234-373-21	s	RES, NETWORK 220X4 (1005)
RB813	1-234-373-21	s	RES, NETWORK 220X4 (1005)
RB814	1-234-373-21	s	RES, NETWORK 220X4 (1005)
RB815	1-234-373-21	s	RES, NETWORK 220X4 (1005)
RB816	1-234-373-21	s	RES, NETWORK 220X4 (1005)
RB817	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB818	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB819	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB820	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB821	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB822	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB823	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB824	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB825	1-234-373-21	s	RES, NETWORK 220X4 (1005)
RB826	1-234-373-21	s	RES, NETWORK 220X4 (1005)
RB827	1-234-373-21	s	RES, NETWORK 220X4 (1005)
RB828	1-234-373-21	s	RES, NETWORK 220X4 (1005)
RB829	1-234-373-21	s	RES, NETWORK 220X4 (1005)
RB830	1-234-373-21	s	RES, NETWORK 220X4 (1005)
RB831	1-234-373-21	s	RES, NETWORK 220X4 (1005)
RB832	1-234-373-21	s	RES, NETWORK 220X4 (1005)
RB833	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB834	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB835	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB836	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB837	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB838	1-234-373-21	s	RES, NETWORK 220X4 (1005)
RB839	1-234-373-21	s	RES, NETWORK 220X4 (1005)
RB840	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB901	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB902	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB903	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB904	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB905	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB906	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB907	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB908	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB909	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB910	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB911	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB912	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB913	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB914	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB915	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB916	1-234-371-11	s	RES, NETWORK 47X4 (1005)

(DPR-265 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description	
RB917	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB918	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB919	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB920	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB921	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB922	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB923	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB924	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB925	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB926	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB927	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB928	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB929	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB930	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB931	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB932	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB933	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB934	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB935	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB936	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB937	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB938	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB939	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB940	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB941	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB942	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB943	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB944	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB945	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB946	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB947	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB948	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB949	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB950	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB951	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB952	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB953	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB954	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB955	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB956	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB957	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB958	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB959	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB960	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB961	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB962	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB963	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB964	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB965	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB966	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB967	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB968	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB969	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB970	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB971	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB972	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB973	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB974	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB975	1-234-371-11	s	RES, NETWORK 47X4	(1005)

(DPR-265 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description	
RB976	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB977	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB978	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB979	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB980	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB981	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB982	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB983	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB984	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB985	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB986	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB987	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB988	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB989	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB990	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB991	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB992	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB993	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB994	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB995	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB996	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB997	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB998	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB999	1-234-371-11	s	RES, NETWORK 47X4	(1005)
S13	1-771-709-31	s	SWITCH, SLIDE	
THP101	1-804-616-11	s	THERMISTOR, POSITIVE	
THP102	1-804-616-11	s	THERMISTOR, POSITIVE	
THP103	1-804-616-11	s	THERMISTOR, POSITIVE	
THP104	1-804-616-11	s	THERMISTOR, POSITIVE	
THP105	1-804-458-21	s	THERMISTOR, POSITIVE	
THP106	1-804-616-11	s	THERMISTOR, POSITIVE	
TP1	1-535-877-22	s	CHIP,CHECKER (TEST POINT)	
TP2	1-535-877-22	s	CHIP,CHECKER (TEST POINT)	
TP3	1-535-877-22	s	CHIP,CHECKER (TEST POINT)	
TP4	1-535-877-22	s	CHIP,CHECKER (TEST POINT)	
TP501	1-535-877-22	s	CHIP,CHECKER (TEST POINT)	
TP502	1-535-877-22	s	CHIP,CHECKER (TEST POINT)	
X501	1-795-670-12	s	OSCILLATOR, CRYSTAL	
X502	1-795-671-12	s	OSCILLATOR, CRYSTAL	
X503	1-813-212-11	s	OSCILLATOR, CRYSTAL	
X601	1-795-872-11	s	OSCILLATOR	

DPR-265C BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1179-310-A	s	MOUNTED CIRCUIT BOARD, DPR-265C
C11	1-115-419-91	s	CAP,CHIP CERAMIC3300PF CH 2012
C12	1-115-419-91	s	CAP,CHIP CERAMIC3300PF CH 2012
C57	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C58	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C59	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C60	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C61	1-100-352-91	s	CAP, CERAMIC 1MF C (1608)
C101	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3225
C102	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3225
C103	1-100-352-91	s	CAP, CERAMIC 1MF C (1608)
C104	1-100-352-91	s	CAP, CERAMIC 1MF C (1608)
C105	1-100-352-91	s	CAP, CERAMIC 1MF C (1608)
C106	1-100-352-91	s	CAP, CERAMIC 1MF C (1608)
C108	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3225
C109	1-100-352-91	s	CAP, CERAMIC 1MF C (1608)
C110	1-100-352-91	s	CAP, CERAMIC 1MF C (1608)
C111	1-100-352-91	s	CAP, CERAMIC 1MF C (1608)
C113	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C114	1-100-352-91	s	CAP, CERAMIC 1MF C (1608)
C115	1-100-352-91	s	CAP, CERAMIC 1MF C (1608)
C117	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C119	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C121	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C122	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C123	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C124	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C125	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C126	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C127	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C128	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C129	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C130	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C132	1-100-352-91	s	CAP, CERAMIC 1MF C (1608)
C133	1-100-352-91	s	CAP, CERAMIC 1MF C (1608)
C134	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C136	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C137	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C138	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C139	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C140	1-100-620-91	s	CAP, CHIP CERAMIC 47MF B(3225)
C141	1-100-352-91	s	CAP, CERAMIC 1MF C (1608)
C142	1-100-620-91	s	CAP, CHIP CERAMIC 47MF B(3225)
C143	1-100-620-91	s	CAP, CHIP CERAMIC 47MF B(3225)
C144	1-100-620-91	s	CAP, CHIP CERAMIC 47MF B(3225)
C145	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C146	1-164-936-81	s	CAP, CHIP CERAMIC 680PF B 1005
C147	1-100-620-91	s	CAP, CHIP CERAMIC 47MF B(3225)
C148	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C149	1-164-936-81	s	CAP, CHIP CERAMIC 680PF B 1005
C150	1-100-620-91	s	CAP, CHIP CERAMIC 47MF B(3225)
C151	1-100-620-91	s	CAP, CHIP CERAMIC 47MF B(3225)
C152	1-100-620-91	s	CAP, CHIP CERAMIC 47MF B(3225)
C153	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C154	1-100-620-91	s	CAP, CHIP CERAMIC 47MF B(3225)
C155	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C156	1-100-620-91	s	CAP, CHIP CERAMIC 47MF B(3225)
C157	1-100-620-91	s	CAP, CHIP CERAMIC 47MF B(3225)

(DPR-265C BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C158	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C159	1-100-620-91	s	CAP, CHIP CERAMIC 47MF B(3225)
C160	1-100-620-91	s	CAP, CHIP CERAMIC 47MF B(3225)
C161	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C162	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C163	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C164	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C165	1-100-620-91	s	CAP, CHIP CERAMIC 47MF B(3225)
C166	1-100-620-91	s	CAP, CHIP CERAMIC 47MF B(3225)
C167	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C168	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C169	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C170	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C171	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C172	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C173	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C174	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C175	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C176	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C177	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C178	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C179	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C180	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C181	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C182	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C183	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C184	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C185	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C186	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C187	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C188	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C189	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C191	1-100-352-91	s	CAP, CERAMIC 1MF C (1608)
C192	1-100-352-91	s	CAP, CERAMIC 1MF C (1608)
C193	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C194	1-100-620-91	s	CAP, CHIP CERAMIC 47MF B(3225)
C195	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C196	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C197	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C198	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C199	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C200	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C201	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C202	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C203	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C204	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C205	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C206	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C207	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C208	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C209	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C210	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C211	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C212	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C213	1-100-352-91	s	CAP, CERAMIC 1MF C (1608)
C214	1-100-352-91	s	CAP, CERAMIC 1MF C (1608)
C215	1-100-352-91	s	CAP, CERAMIC 1MF C (1608)
C219	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C220	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)

(DPR-265C BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C221	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C222	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C223	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C224	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C225	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C226	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C227	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C228	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C229	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C230	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C231	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C232	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C233	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C234	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C235	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C236	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C237	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C238	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C239	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C240	1-164-840-81	s	CAP, CHIP CERAMIC 1PF CK 1005
C241	1-164-840-81	s	CAP, CHIP CERAMIC 1PF CK 1005
C242	1-164-840-81	s	CAP, CHIP CERAMIC 1PF CK 1005
C243	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C244	1-164-840-81	s	CAP, CHIP CERAMIC 1PF CK 1005
C245	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C246	1-164-840-81	s	CAP, CHIP CERAMIC 1PF CK 1005
C247	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C248	1-164-840-81	s	CAP, CHIP CERAMIC 1PF CK 1005
C249	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C250	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C251	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C252	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C253	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C254	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C255	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C256	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C257	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C258	1-100-742-91	s	CAP, CERAMIC 2.2MF C (1608)
C259	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C260	1-100-742-91	s	CAP, CERAMIC 2.2MF C (1608)
C261	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C262	1-100-742-91	s	CAP, CERAMIC 2.2MF C (1608)
C263	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C264	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C265	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C266	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C267	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C268	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C269	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C270	1-100-507-91	s	CAP, CERAMIC 4.7MF C (1608)
C271	1-100-507-91	s	CAP, CERAMIC 4.7MF C (1608)
C272	1-100-507-91	s	CAP, CERAMIC 4.7MF C (1608)
C273	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C274	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C275	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C276	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C277	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C278	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C279	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216

(DPR-265C BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C280	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C281	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C282	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C283	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C284	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C285	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C286	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C287	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C288	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C289	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C290	1-100-352-91	s	CAP, CERAMIC 1MF C (1608)
C291	1-100-352-91	s	CAP, CERAMIC 1MF C (1608)
C292	1-100-352-91	s	CAP, CERAMIC 1MF C (1608)
C296	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C297	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C298	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C299	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C300	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C301	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C302	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C303	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C304	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C305	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C306	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C307	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C308	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C309	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C310	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C311	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C312	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C313	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C314	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C315	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C316	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C317	1-164-840-81	s	CAP, CHIP CERAMIC 1PF CK 1005
C318	1-164-840-81	s	CAP, CHIP CERAMIC 1PF CK 1005
C319	1-164-840-81	s	CAP, CHIP CERAMIC 1PF CK 1005
C320	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C321	1-164-840-81	s	CAP, CHIP CERAMIC 1PF CK 1005
C322	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C323	1-164-840-81	s	CAP, CHIP CERAMIC 1PF CK 1005
C324	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C325	1-164-840-81	s	CAP, CHIP CERAMIC 1PF CK 1005
C326	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C327	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C328	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C329	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C330	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C331	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C332	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C333	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C334	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C335	1-100-742-91	s	CAP, CERAMIC 2.2MF C (1608)
C336	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C337	1-100-742-91	s	CAP, CERAMIC 2.2MF C (1608)
C338	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C339	1-100-742-91	s	CAP, CERAMIC 2.2MF C (1608)
C340	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C341	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(DPR-265C BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C342	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C343	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C344	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C345	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C346	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C347	1-100-507-91	s	CAP, CERAMIC 4.7MF C (1608)
C348	1-100-507-91	s	CAP, CERAMIC 4.7MF C (1608)
C349	1-100-507-91	s	CAP, CERAMIC 4.7MF C (1608)
C350	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C351	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C352	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C353	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C354	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C355	1-100-620-91	s	CAP, CHIP CERAMIC 47MF B(3225)
C356	1-100-620-91	s	CAP, CHIP CERAMIC 47MF B(3225)
C357	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C358	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C359	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C360	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C361	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C362	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C371	1-100-352-91	s	CAP, CERAMIC 1MF C (1608)
C372	1-100-352-91	s	CAP, CERAMIC 1MF C (1608)
C373	1-100-352-91	s	CAP, CERAMIC 1MF C (1608)
C374	1-100-352-91	s	CAP, CERAMIC 1MF C (1608)
C375	1-100-352-91	s	CAP, CERAMIC 1MF C (1608)
C376	1-100-352-91	s	CAP, CERAMIC 1MF C (1608)
C377	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C399	1-100-352-91	s	CAP, CERAMIC 1MF C (1608)
C401	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C402	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C403	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C404	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C405	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C406	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C407	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C408	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C409	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C410	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C411	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C412	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C413	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C414	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C415	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C416	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C417	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C418	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C419	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C420	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C421	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C422	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C423	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C424	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C425	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C426	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C427	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C428	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C429	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C430	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(DPR-265C BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C431	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C432	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C433	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C434	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C435	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C436	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C437	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C438	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C439	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C440	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C441	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C442	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C443	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C444	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C445	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C446	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C447	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C448	1-100-507-91	s	CAP, CERAMIC 4.7MF C (1608)
C449	1-100-507-91	s	CAP, CERAMIC 4.7MF C (1608)
C450	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C451	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C452	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C453	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C454	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C455	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C456	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C457	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C458	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C459	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C460	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C461	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C462	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C463	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C464	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C501	1-107-826-91	s	CAP, CHIP CERAMIC 100000PF B
C502	1-107-826-91	s	CAP, CHIP CERAMIC 100000PF B
C503	1-107-826-91	s	CAP, CHIP CERAMIC 100000PF B
C504	1-107-826-91	s	CAP, CHIP CERAMIC 100000PF B
C505	1-100-620-91	s	CAP, CHIP CERAMIC 47MF B(3225)
C506	1-100-620-91	s	CAP, CHIP CERAMIC 47MF B(3225)
C507	1-127-956-21	s	CAP, CHIP FILM 0.1MF (3225)
C508	1-127-956-21	s	CAP, CHIP FILM 0.1MF (3225)
C509	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C510	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C511	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C512	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C513	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C514	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C515	1-127-956-21	s	CAP, CHIP FILM 0.1MF (3225)
C516	1-127-956-21	s	CAP, CHIP FILM 0.1MF (3225)
C517	1-127-950-21	s	CAP, CHIP FILM 0.01MF (2012)
C518	1-127-950-21	s	CAP, CHIP FILM 0.01MF (2012)
C519	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C520	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C521	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C522	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C523	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C524	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C525	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005

(DPR-265C BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C526	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C527	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C528	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C529	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C530	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C531	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C532	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C533	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C534	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C535	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C538	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C542	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C543	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C544	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C545	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C546	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C547	1-107-826-91	s	CAP, CHIP CERAMIC 100000PF B
C548	1-107-826-91	s	CAP, CHIP CERAMIC 100000PF B
C602	1-100-352-91	s	CAP, CERAMIC 1MF C (1608)
C604	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C605	1-164-939-81	s	CAP, CHIPCERAMIC 2200PF B 1005
C606	1-100-352-91	s	CAP, CERAMIC 1MF C (1608)
C607	1-100-352-91	s	CAP, CERAMIC 1MF C (1608)
C608	1-100-352-91	s	CAP, CERAMIC 1MF C (1608)
C609	1-100-352-91	s	CAP, CERAMIC 1MF C (1608)
C610	1-127-760-91	s	CAP, CHIP CERAMIC 4.7MF B 2012
C611	1-127-760-91	s	CAP, CHIP CERAMIC 4.7MF B 2012
C612	1-100-352-91	s	CAP, CERAMIC 1MF C (1608)
C613	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C614	1-100-352-91	s	CAP, CERAMIC 1MF C (1608)
C615	1-100-352-91	s	CAP, CERAMIC 1MF C (1608)
C616	1-127-760-91	s	CAP, CHIP CERAMIC 4.7MF B 2012
C617	1-100-352-91	s	CAP, CERAMIC 1MF C (1608)
C618	1-100-352-91	s	CAP, CERAMIC 1MF C (1608)
C619	1-100-352-91	s	CAP, CERAMIC 1MF C (1608)
C620	1-127-760-91	s	CAP, CHIP CERAMIC 4.7MF B 2012
C621	1-127-760-91	s	CAP, CHIP CERAMIC 4.7MF B 2012
C622	1-127-760-91	s	CAP, CHIP CERAMIC 4.7MF B 2012
C623	1-127-760-91	s	CAP, CHIP CERAMIC 4.7MF B 2012
C624	1-100-352-91	s	CAP, CERAMIC 1MF C (1608)
C625	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C626	1-100-352-91	s	CAP, CERAMIC 1MF C (1608)
C627	1-100-352-91	s	CAP, CERAMIC 1MF C (1608)
C628	1-100-620-91	s	CAP, CHIP CERAMIC 47MF B(3225)
C629	1-127-760-91	s	CAP, CHIP CERAMIC 4.7MF B 2012
C630	1-127-760-91	s	CAP, CHIP CERAMIC 4.7MF B 2012
C631	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C632	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C633	1-100-352-91	s	CAP, CERAMIC 1MF C (1608)
C634	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C701	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C702	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C703	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C704	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C705	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C706	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C707	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C708	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C709	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(DPR-265C BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C710	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C711	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C712	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C713	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C714	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C715	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C716	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C717	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C718	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C719	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C720	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C721	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C722	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C723	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C724	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C727	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C728	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C729	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C730	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C731	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C732	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C733	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C734	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C735	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C736	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C737	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C738	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C739	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C740	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C741	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C742	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C743	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C744	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C745	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C746	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C747	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C748	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C749	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C752	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C753	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C754	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C755	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C756	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C757	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C758	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C759	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C760	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C761	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C762	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C763	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C764	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C765	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C766	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C767	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C768	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C769	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C770	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C771	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C772	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(DPR-265C BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C773	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C774	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C775	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C776	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C777	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C778	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C788	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C789	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C790	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C791	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C792	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C793	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C794	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C795	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C796	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C797	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C798	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C799	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C800	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C801	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C802	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C803	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C804	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C805	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C806	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C807	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C808	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C809	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C810	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C820	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C821	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C822	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C823	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C824	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C825	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C826	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C827	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C828	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C829	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C830	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C831	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C832	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C833	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C834	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C835	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C836	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C837	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C838	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C839	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C840	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C841	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C842	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C843	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C844	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C845	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C846	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C847	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C848	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C849	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(DPR-265C BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C850	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C851	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C852	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C853	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C854	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C855	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C856	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C857	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C858	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C865	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C866	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C867	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C868	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C869	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C870	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C871	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C872	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C873	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C874	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C875	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C876	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C877	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C878	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C879	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C880	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C881	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C882	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C883	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C884	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C885	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C886	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C887	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C888	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C889	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C890	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C891	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C892	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C896	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C897	1-100-352-91	s	CAP, CERAMIC 1MF C (1608)
C900	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C901	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C902	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C903	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C904	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C905	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C906	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C907	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C908	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C909	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C910	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C911	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C912	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C913	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C914	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C915	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C916	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C917	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C918	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C919	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(DPR-265C BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C920	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C921	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C922	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C923	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C924	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C925	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C926	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C927	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C928	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C929	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C930	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C931	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C932	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C933	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C934	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C935	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C936	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C937	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C938	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C939	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C940	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C941	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C942	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C943	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C944	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C945	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C946	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C947	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C948	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C949	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C950	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C951	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C952	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C953	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C954	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C955	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C956	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C957	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C958	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C959	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C960	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C961	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C962	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C963	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C964	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C965	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C966	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C967	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C968	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C969	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C970	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C971	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C972	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C973	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C974	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C975	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C976	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C977	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C978	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(DPR-265C BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C979	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C980	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C981	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C982	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C983	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C984	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C985	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C986	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C987	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C988	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C989	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C990	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C991	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C992	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C993	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C994	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C995	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C996	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C997	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C998	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C999	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
D11	8-719-064-52	s	DIODE CL-191YG-CD-T
D102	8-719-017-03	s	DIODE 02DZ4.7-TPH3
D103	8-719-017-03	s	DIODE 02DZ4.7-TPH3
D104	8-719-820-42	s	DIODE 1SS302-TE85L
D501	8-719-820-42	s	DIODE 1SS302-TE85L
D502	8-719-820-42	s	DIODE 1SS302-TE85L
D504	8-719-820-42	s	DIODE 1SS302-TE85L
D505	8-719-820-42	s	DIODE 1SS302-TE85L
D506	8-719-820-42	s	DIODE 1SS302-TE85L
D507	8-719-820-42	s	DIODE 1SS302-TE85L
E1	1-535-877-22	s	CHIP, CHECKER
E2	1-535-877-22	s	CHIP, CHECKER
FB101	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB102	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB103	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB104	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB105	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB106	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB107	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB108	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB501	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB502	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB503	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB602	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB603	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB604	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB605	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB606	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB607	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB608	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB609	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB610	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB611	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB612	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB613	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB901	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB902	1-469-094-21	s	FERRITE, EMI (SMD) (1608)

(DPR-265C BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
FB903	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB904	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB905	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB906	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB907	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB908	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB909	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB910	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB911	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB912	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB913	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB914	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB915	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB916	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB917	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB918	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB919	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB920	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB921	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB922	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB923	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB924	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB925	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB926	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB927	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FL201	1-813-542-11	s	FILTER, LOW PASS
FL202	1-813-542-11	s	FILTER, LOW PASS
FL203	1-813-542-11	s	FILTER, LOW PASS
IC101	6-704-976-01	s	IC ADR381ARTZ-REEL7
IC102	8-759-327-01	s	IC NJM062V(TE2)
IC103	8-759-327-01	s	IC NJM062V(TE2)
IC104	6-701-572-01	s	IC TPS54610PWPR
IC105	6-701-572-01	s	IC TPS54610PWPR
IC106	6-706-482-01	s	IC TC7SH00FU(T5RSOYJF)
IC107	8-759-392-77	s	IC SN74LVC245APWR
IC108	8-759-392-77	s	IC SN74LVC245APWR
IC110	8-759-346-27	s	IC LM45BIM3X
IC111	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC201	6-706-863-01	s	IC LMH6732MFX/NOPB
IC202	6-706-863-01	s	IC LMH6732MFX/NOPB
IC203	6-706-863-01	s	IC LMH6732MFX/NOPB
IC204	6-708-676-01	s	IC AD8138ARMZ-REEL7
IC205	6-708-676-01	s	IC AD8138ARMZ-REEL7
IC206	6-708-676-01	s	IC AD8138ARMZ-REEL7
IC208	6-708-675-01	s	IC LTC2249IUH#TR-500
IC209	6-708-675-01	s	IC LTC2249IUH#TR-500
IC210	8-759-564-49	s	IC TC7W53FU(TE12R)
IC211	8-759-564-49	s	IC TC7W53FU(TE12R)
IC212	8-759-564-49	s	IC TC7W53FU(TE12R)
IC225	8-759-327-01	s	IC NJM062V(TE2)
IC226	8-759-327-01	s	IC NJM062V(TE2)
IC230	6-700-915-01	s	IC TC74VHCT04AFT(EL)
IC232	6-708-675-01	s	IC LTC2249IUH#TR-500
IC302	6-700-804-01	s	IC SN74LVC574APWR
IC303	6-700-804-01	s	IC SN74LVC574APWR
IC305	6-700-804-01	s	IC SN74LVC574APWR
IC306	6-700-804-01	s	IC SN74LVC574APWR
IC308	6-700-804-01	s	IC SN74LVC574APWR

(DPR-265C BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC310	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC501	8-759-485-24	s	IC MC74HC4046ADTR2
IC502	8-759-485-24	s	IC MC74HC4046ADTR2
IC503	8-759-564-49	s	IC TC7W53FU(TE12R)
IC504	8-759-564-49	s	IC TC7W53FU(TE12R)
IC505	8-759-564-49	s	IC TC7W53FU(TE12R)
IC506	8-759-675-47	s	IC SN74LVC04APWR
IC507	8-759-675-47	s	IC SN74LVC04APWR
IC509	6-702-787-01	s	IC UPD6467GR-525-E2
IC510	6-702-787-01	s	IC UPD6467GR-525-E2
IC511	8-759-276-25	s	IC TLC272CPSR
IC512	6-706-478-01	s	IC TC7SET08FU(T5RSOJF)
IC513	6-706-478-01	s	IC TC7SET08FU(T5RSOJF)
IC514	6-706-478-01	s	IC TC7SET08FU(T5RSOJF)
IC515	6-706-478-01	s	IC TC7SET08FU(T5RSOJF)
IC516	8-759-592-42	s	IC TC7SZ00FU(TE85R)
IC517	8-759-592-42	s	IC TC7SZ00FU(TE85R)
IC518	8-759-592-42	s	IC TC7SZ00FU(TE85R)
IC519	8-759-592-42	s	IC TC7SZ00FU(TE85R)
IC520	8-759-592-42	s	IC TC7SZ00FU(TE85R)
IC521	8-759-592-42	s	IC TC7SZ00FU(TE85R)
IC522	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC523	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC802	8-759-679-57	s	IC SN74LVC00APWR
IC803	8-759-592-42	s	IC TC7SZ00FU(TE85R)
IC804	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC805	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC901	6-706-350-01	s	IC EDD2516AKTA-6B-E
IC902	6-706-350-01	s	IC EDD2516AKTA-6B-E
IC905	6-706-350-01	s	IC EDD2516AKTA-6B-E
IC906	6-706-350-01	s	IC EDD2516AKTA-6B-E
L101	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L102	1-416-948-21	s	COIL, CHOKE 10UH
L103	1-416-948-21	s	COIL, CHOKE 10UH
L104	1-419-491-21	s	COIL, CHOKE 10UH
L105	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L106	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L107	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L108	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L109	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L111	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L112	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L201	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L202	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L203	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L204	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L205	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L206	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L207	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L208	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L209	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L210	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L211	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L212	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L213	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L214	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L215	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L216	1-414-398-41	s	INDUCTOR (SMD) 10.0UH

(DPR-265C BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
L217	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L218	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L219	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L220	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L221	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L222	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L401	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L402	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L403	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L404	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L405	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L406	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L407	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L501	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L502	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L503	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L504	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L505	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L506	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L507	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L509	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L510	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L511	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L512	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L601	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L602	1-414-457-21	s	INDUCTOR, CHIP (S) 3.3NH
L603	1-414-457-21	s	INDUCTOR, CHIP (S) 3.3NH
L801	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L802	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L803	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L804	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L805	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L806	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
Q11	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q101	8-729-230-27	s	TRANSISTOR 2SA1213Y-TE12L
Q102	8-729-230-27	s	TRANSISTOR 2SA1213Y-TE12L
Q103	8-729-209-77	s	TRANSISTOR 2SC2873Y-TE12L
Q104	8-729-230-27	s	TRANSISTOR 2SA1213Y-TE12L
Q105	8-729-927-99	s	TRANSISTOR 2SC4617TL-QR
Q106	8-729-927-99	s	TRANSISTOR 2SC4617TL-QR
Q107	8-729-928-19	s	TRANSISTOR 2SA1774TL-QR
Q108	8-729-927-99	s	TRANSISTOR 2SC4617TL-QR
Q501	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q502	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q503	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q505	8-729-928-19	s	TRANSISTOR 2SA1774TL-QR
Q507	8-729-928-19	s	TRANSISTOR 2SA1774TL-QR
R11	1-220-230-91	s	RES,SQUARE TYPE CHIP 2.2(3225)
R12	1-220-230-91	s	RES,SQUARE TYPE CHIP 2.2(3225)
R101	1-218-945-81	s	RES, CHIP 220
R102	1-218-945-81	s	RES, CHIP 220
R103	1-208-933-81	s	RES, CHIP 82K (1005)
R104	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R105	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R106	1-218-953-81	s	RES, CHIP 1.0K
R107	1-218-953-81	s	RES, CHIP 1.0K
R108	1-218-977-81	s	RES, CHIP 100K
R109	1-218-945-81	s	RES, CHIP 220

(DPR-265C BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R111	1-218-945-81	s	RES, CHIP 220
R112	1-208-715-11	s	RES, CHIP 22K (1005)
R113	1-208-715-11	s	RES, CHIP 22K (1005)
R114	1-208-923-81	s	RES, CHIP 33K (1005)
R115	1-208-923-81	s	RES, CHIP 33K (1005)
R116	1-208-715-11	s	RES, CHIP 22K (1005)
R117	1-208-703-11	s	RES, CHIP 6.8K (1005)
R118	1-208-923-81	s	RES, CHIP 33K (1005)
R119	1-218-973-81	s	RES, CHIP 47K
R120	1-218-941-81	s	RES, CHIP 100
R121	1-218-953-81	s	RES, CHIP 1.0K
R122	1-218-965-81	s	RES, CHIP 10K
R123	1-208-931-81	s	RES, CHIP 68K (1005)
R124	1-208-891-81	s	RES, CHIP 1.5K (1005)
R125	1-208-891-81	s	RES, CHIP 1.5K (1005)
R126	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R127	1-208-931-81	s	RES, CHIP 68K (1005)
R128	1-218-941-81	s	RES, CHIP 100
R129	1-218-941-81	s	RES, CHIP 100
R130	1-208-911-81	s	RES, CHIP 10K (1005)
R131	1-208-911-81	s	RES, CHIP 10K (1005)
R132	1-208-715-11	s	RES, CHIP 22K (1005)
R133	1-208-699-11	s	RES, CHIP 4.7K (1005)
R134	1-208-715-11	s	RES, CHIP 22K (1005)
R135	1-208-931-81	s	RES, CHIP 68K (1005)
R136	1-208-905-81	s	RES, CHIP 5.6K (1005)
R137	1-208-883-81	s	RES, CHIP 680 (1005)
R138	1-218-941-81	s	RES, CHIP 100
R141	1-218-937-81	s	RES, CHIP 47
R142	1-218-937-81	s	RES, CHIP 47
R143	1-218-937-81	s	RES, CHIP 47
R144	1-218-941-81	s	RES, CHIP 100
R145	1-218-941-81	s	RES, CHIP 100
R146	1-218-823-91	s	RES, CHIP 100 (1608)
R147	1-218-823-91	s	RES, CHIP 100 (1608)
R148	1-218-823-91	s	RES, CHIP 100 (1608)
R149	1-218-823-91	s	RES, CHIP 100 (1608)
R150	1-218-945-81	s	RES, CHIP 220
R151	1-208-715-11	s	RES, CHIP 22K (1005)
R152	1-208-715-11	s	RES, CHIP 22K (1005)
R153	1-208-715-11	s	RES, CHIP 22K (1005)
R154	1-218-929-81	s	RES, CHIP 10
R155	1-208-715-11	s	RES, CHIP 22K (1005)
R166	1-218-965-81	s	RES, CHIP 10K
R167	1-218-965-81	s	RES, CHIP 10K
R168	1-218-973-81	s	RES, CHIP 47K
R169	1-208-931-81	s	RES, CHIP 68K (1005)
R170	1-218-941-81	s	RES, CHIP 100
R171	1-208-883-81	s	RES, CHIP 680 (1005)
R172	1-218-937-81	s	RES, CHIP 47
R173	1-218-973-81	s	RES, CHIP 47K
R174	1-218-941-81	s	RES, CHIP 100
R201	1-218-965-81	s	RES, CHIP 10K
R202	1-218-965-81	s	RES, CHIP 10K
R203	1-218-965-81	s	RES, CHIP 10K
R204	1-208-883-81	s	RES, CHIP 680 (1005)
R205	1-208-883-81	s	RES, CHIP 680 (1005)
R206	1-208-883-81	s	RES, CHIP 680 (1005)
R207	1-208-883-81	s	RES, CHIP 680 (1005)

(DPR-265C BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R208	1-208-883-81	s	RES, CHIP 680 (1005)
R209	1-208-883-81	s	RES, CHIP 680 (1005)
R210	1-218-937-81	s	RES, CHIP 47
R211	1-218-937-81	s	RES, CHIP 47
R212	1-218-937-81	s	RES, CHIP 47
R213	1-218-969-81	s	RES, CHIP 22K
R214	1-218-969-81	s	RES, CHIP 22K
R215	1-218-969-81	s	RES, CHIP 22K
R216	1-218-973-81	s	RES, CHIP 47K
R217	1-218-973-81	s	RES, CHIP 47K
R218	1-218-973-81	s	RES, CHIP 47K
R219	1-208-691-11	s	RES, CHIP 2.2K (1005)
R220	1-208-691-11	s	RES, CHIP 2.2K (1005)
R221	1-208-691-11	s	RES, CHIP 2.2K (1005)
R222	1-208-885-81	s	RES, CHIP 820 (1005)
R223	1-218-977-81	s	RES, CHIP 100K
R224	1-208-885-81	s	RES, CHIP 820 (1005)
R225	1-218-977-81	s	RES, CHIP 100K
R226	1-208-885-81	s	RES, CHIP 820 (1005)
R227	1-218-977-81	s	RES, CHIP 100K
R228	1-208-875-81	s	RES, CHIP 330 (1005)
R229	1-208-875-81	s	RES, CHIP 330 (1005)
R230	1-208-875-81	s	RES, CHIP 330 (1005)
R234	1-218-961-81	s	RES, CHIP 4.7K
R235	1-218-961-81	s	RES, CHIP 4.7K
R236	1-218-961-81	s	RES, CHIP 4.7K
R237	1-208-883-81	s	RES, CHIP 680 (1005)
R238	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R239	1-208-883-81	s	RES, CHIP 680 (1005)
R240	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R241	1-208-883-81	s	RES, CHIP 680 (1005)
R242	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R243	1-208-879-81	s	RES, CHIP 470 (1005)
R244	1-208-879-81	s	RES, CHIP 470 (1005)
R245	1-208-879-81	s	RES, CHIP 470 (1005)
R246	1-208-879-81	s	RES, CHIP 470 (1005)
R247	1-208-879-81	s	RES, CHIP 470 (1005)
R248	1-208-879-81	s	RES, CHIP 470 (1005)
R249	1-208-875-81	s	RES, CHIP 330 (1005)
R250	1-208-875-81	s	RES, CHIP 330 (1005)
R251	1-208-875-81	s	RES, CHIP 330 (1005)
R252	1-208-875-81	s	RES, CHIP 330 (1005)
R253	1-208-875-81	s	RES, CHIP 330 (1005)
R254	1-208-875-81	s	RES, CHIP 330 (1005)
R255	1-218-953-81	s	RES, CHIP 1.0K
R256	1-218-953-81	s	RES, CHIP 1.0K
R257	1-218-953-81	s	RES, CHIP 1.0K
R258	1-216-803-91	s	RES, CHIP 33 (1608)
R259	1-216-803-91	s	RES, CHIP 33 (1608)
R260	1-216-803-91	s	RES, CHIP 33 (1608)
R261	1-216-803-91	s	RES, CHIP 33 (1608)
R262	1-216-803-91	s	RES, CHIP 33 (1608)
R263	1-216-803-91	s	RES, CHIP 33 (1608)
R264	1-218-941-81	s	RES, CHIP 100
R265	1-218-941-81	s	RES, CHIP 100
R266	1-218-941-81	s	RES, CHIP 100
R273	1-218-941-81	s	RES, CHIP 100
R274	1-218-941-81	s	RES, CHIP 100
R275	1-218-941-81	s	RES, CHIP 100

(DPR-265C BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R276	1-218-941-81	s	RES, CHIP 100
R277	1-218-941-81	s	RES, CHIP 100
R278	1-218-941-81	s	RES, CHIP 100
R279	1-218-953-81	s	RES, CHIP 1.0K
R280	1-218-953-81	s	RES, CHIP 1.0K
R281	1-218-953-81	s	RES, CHIP 1.0K
R282	1-218-941-81	s	RES, CHIP 100
R283	1-218-941-81	s	RES, CHIP 100
R284	1-218-941-81	s	RES, CHIP 100
R285	1-218-957-81	s	RES, CHIP 2.2K
R286	1-218-957-81	s	RES, CHIP 2.2K
R287	1-218-957-81	s	RES, CHIP 2.2K
R288	1-218-965-81	s	RES, CHIP 10K
R289	1-218-965-81	s	RES, CHIP 10K
R290	1-218-965-81	s	RES, CHIP 10K
R291	1-218-965-81	s	RES, CHIP 10K
R292	1-218-965-81	s	RES, CHIP 10K
R293	1-218-965-81	s	RES, CHIP 10K
R294	1-218-965-81	s	RES, CHIP 10K
R295	1-218-965-81	s	RES, CHIP 10K
R296	1-218-965-81	s	RES, CHIP 10K
R297	1-218-941-81	s	RES, CHIP 100
R298	1-218-941-81	s	RES, CHIP 100
R299	1-218-941-81	s	RES, CHIP 100
R300	1-218-941-81	s	RES, CHIP 100
R301	1-218-941-81	s	RES, CHIP 100
R302	1-218-941-81	s	RES, CHIP 100
R309	1-218-965-81	s	RES, CHIP 10K
R310	1-218-965-81	s	RES, CHIP 10K
R311	1-218-965-81	s	RES, CHIP 10K
R312	1-208-883-81	s	RES, CHIP 680 (1005)
R313	1-208-883-81	s	RES, CHIP 680 (1005)
R314	1-208-883-81	s	RES, CHIP 680 (1005)
R315	1-208-883-81	s	RES, CHIP 680 (1005)
R316	1-208-883-81	s	RES, CHIP 680 (1005)
R317	1-208-883-81	s	RES, CHIP 680 (1005)
R318	1-218-937-81	s	RES, CHIP 47
R319	1-218-937-81	s	RES, CHIP 47
R320	1-218-937-81	s	RES, CHIP 47
R321	1-218-969-81	s	RES, CHIP 22K
R322	1-218-969-81	s	RES, CHIP 22K
R323	1-218-969-81	s	RES, CHIP 22K
R324	1-218-973-81	s	RES, CHIP 47K
R325	1-218-973-81	s	RES, CHIP 47K
R326	1-218-973-81	s	RES, CHIP 47K
R327	1-208-691-11	s	RES, CHIP 2.2K (1005)
R328	1-208-691-11	s	RES, CHIP 2.2K (1005)
R329	1-208-691-11	s	RES, CHIP 2.2K (1005)
R330	1-208-885-81	s	RES, CHIP 820 (1005)
R331	1-218-977-81	s	RES, CHIP 100K
R332	1-208-885-81	s	RES, CHIP 820 (1005)
R333	1-218-977-81	s	RES, CHIP 100K
R334	1-208-885-81	s	RES, CHIP 820 (1005)
R335	1-218-977-81	s	RES, CHIP 100K
R336	1-208-875-81	s	RES, CHIP 330 (1005)
R337	1-208-875-81	s	RES, CHIP 330 (1005)
R338	1-208-875-81	s	RES, CHIP 330 (1005)
R342	1-218-961-81	s	RES, CHIP 4.7K
R343	1-218-961-81	s	RES, CHIP 4.7K

(DPR-265C BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R344	1-218-961-81	s	RES, CHIP 4.7K
R345	1-208-883-81	s	RES, CHIP 680 (1005)
R346	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R347	1-208-883-81	s	RES, CHIP 680 (1005)
R348	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R349	1-208-883-81	s	RES, CHIP 680 (1005)
R350	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R351	1-208-879-81	s	RES, CHIP 470 (1005)
R352	1-208-879-81	s	RES, CHIP 470 (1005)
R353	1-208-879-81	s	RES, CHIP 470 (1005)
R354	1-208-879-81	s	RES, CHIP 470 (1005)
R355	1-208-879-81	s	RES, CHIP 470 (1005)
R356	1-208-879-81	s	RES, CHIP 470 (1005)
R357	1-208-875-81	s	RES, CHIP 330 (1005)
R358	1-208-875-81	s	RES, CHIP 330 (1005)
R359	1-208-875-81	s	RES, CHIP 330 (1005)
R360	1-208-875-81	s	RES, CHIP 330 (1005)
R361	1-208-875-81	s	RES, CHIP 330 (1005)
R362	1-208-875-81	s	RES, CHIP 330 (1005)
R363	1-218-953-81	s	RES, CHIP 1.0K
R364	1-218-953-81	s	RES, CHIP 1.0K
R365	1-218-953-81	s	RES, CHIP 1.0K
R366	1-216-803-91	s	RES, CHIP 33 (1608)
R367	1-216-803-91	s	RES, CHIP 33 (1608)
R368	1-216-803-91	s	RES, CHIP 33 (1608)
R369	1-216-803-91	s	RES, CHIP 33 (1608)
R370	1-216-803-91	s	RES, CHIP 33 (1608)
R371	1-216-803-91	s	RES, CHIP 33 (1608)
R372	1-218-941-81	s	RES, CHIP 100
R373	1-218-941-81	s	RES, CHIP 100
R374	1-218-941-81	s	RES, CHIP 100
R381	1-218-941-81	s	RES, CHIP 100
R382	1-218-941-81	s	RES, CHIP 100
R383	1-218-941-81	s	RES, CHIP 100
R384	1-218-941-81	s	RES, CHIP 100
R385	1-218-941-81	s	RES, CHIP 100
R386	1-218-941-81	s	RES, CHIP 100
R387	1-218-965-81	s	RES, CHIP 10K
R388	1-218-965-81	s	RES, CHIP 10K
R389	1-218-965-81	s	RES, CHIP 10K
R390	1-218-941-81	s	RES, CHIP 100
R391	1-218-941-81	s	RES, CHIP 100
R392	1-218-941-81	s	RES, CHIP 100
R393	1-218-957-81	s	RES, CHIP 2.2K
R394	1-218-957-81	s	RES, CHIP 2.2K
R395	1-218-957-81	s	RES, CHIP 2.2K
R396	1-218-965-81	s	RES, CHIP 10K
R397	1-218-965-81	s	RES, CHIP 10K
R398	1-218-965-81	s	RES, CHIP 10K
R399	1-218-973-81	s	RES, CHIP 47K
R400	1-218-973-81	s	RES, CHIP 47K
R401	1-208-931-81	s	RES, CHIP 68K (1005)
R402	1-208-931-81	s	RES, CHIP 68K (1005)
R403	1-208-931-81	s	RES, CHIP 68K (1005)
R404	1-218-973-81	s	RES, CHIP 47K
R405	1-208-931-81	s	RES, CHIP 68K (1005)
R406	1-218-965-81	s	RES, CHIP 10K
R407	1-218-965-81	s	RES, CHIP 10K
R408	1-218-965-81	s	RES, CHIP 10K

(DPR-265C BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R409	1-218-965-81	s	RES, CHIP 10K
R410	1-218-965-81	s	RES, CHIP 10K
R411	1-218-965-81	s	RES, CHIP 10K
R412	1-218-941-81	s	RES, CHIP 100
R413	1-218-965-81	s	RES, CHIP 10K
R414	1-218-965-81	s	RES, CHIP 10K
R415	1-218-941-81	s	RES, CHIP 100
R416	1-218-941-81	s	RES, CHIP 100
R417	1-218-941-81	s	RES, CHIP 100
R418	1-218-941-81	s	RES, CHIP 100
R419	1-218-941-81	s	RES, CHIP 100
R432	1-208-905-81	s	RES, CHIP 5.6K (1005)
R433	1-208-905-81	s	RES, CHIP 5.6K (1005)
R434	1-208-905-81	s	RES, CHIP 5.6K (1005)
R435	1-208-905-81	s	RES, CHIP 5.6K (1005)
R436	1-208-905-81	s	RES, CHIP 5.6K (1005)
R437	1-208-905-81	s	RES, CHIP 5.6K (1005)
R451	1-218-941-81	s	RES, CHIP 100
R452	1-218-937-81	s	RES, CHIP 47
R453	1-218-937-81	s	RES, CHIP 47
R454	1-218-937-81	s	RES, CHIP 47
R456	1-218-941-81	s	RES, CHIP 100
R457	1-218-941-81	s	RES, CHIP 100
R458	1-218-941-81	s	RES, CHIP 100
R459	1-218-937-81	s	RES, CHIP 47
R460	1-218-937-81	s	RES, CHIP 47
R461	1-218-945-81	s	RES, CHIP 220
R462	1-218-945-81	s	RES, CHIP 220
R463	1-218-941-81	s	RES, CHIP 100
R464	1-218-941-81	s	RES, CHIP 100
R465	1-218-941-81	s	RES, CHIP 100
R466	1-218-941-81	s	RES, CHIP 100
R467	1-218-941-81	s	RES, CHIP 100
R468	1-218-941-81	s	RES, CHIP 100
R469	1-218-941-81	s	RES, CHIP 100
R470	1-218-941-81	s	RES, CHIP 100
R471	1-218-941-81	s	RES, CHIP 100
R472	1-218-941-81	s	RES, CHIP 100
R473	1-218-953-81	s	RES, CHIP 1.0K
R474	1-218-977-81	s	RES, CHIP 100K
R475	1-218-941-81	s	RES, CHIP 100
R476	1-218-941-81	s	RES, CHIP 100
R478	1-218-977-81	s	RES, CHIP 100K
R479	1-218-977-81	s	RES, CHIP 100K
R480	1-218-941-81	s	RES, CHIP 100
R481	1-218-941-81	s	RES, CHIP 100
R482	1-218-941-81	s	RES, CHIP 100
R501	1-218-941-81	s	RES, CHIP 100
R502	1-218-941-81	s	RES, CHIP 100
R503	1-218-941-81	s	RES, CHIP 100
R504	1-218-941-81	s	RES, CHIP 100
R505	1-218-957-81	s	RES, CHIP 2.2K
R506	1-218-957-81	s	RES, CHIP 2.2K
R507	1-218-957-81	s	RES, CHIP 2.2K
R508	1-218-957-81	s	RES, CHIP 2.2K
R510	1-218-973-81	s	RES, CHIP 47K
R511	1-218-965-81	s	RES, CHIP 10K
R512	1-218-965-81	s	RES, CHIP 10K
R513	1-218-957-81	s	RES, CHIP 2.2K

(DPR-265C BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R514	1-218-957-81	s	RES, CHIP 2.2K
R515	1-218-977-81	s	RES, CHIP 100K
R516	1-218-973-81	s	RES, CHIP 47K
R517	1-218-973-81	s	RES, CHIP 47K
R518	1-218-973-81	s	RES, CHIP 47K
R519	1-218-953-81	s	RES, CHIP 1.0K
R520	1-218-973-81	s	RES, CHIP 47K
R521	1-218-957-81	s	RES, CHIP 2.2K
R522	1-218-941-81	s	RES, CHIP 100
R523	1-218-965-81	s	RES, CHIP 10K
R524	1-218-965-81	s	RES, CHIP 10K
R525	1-218-977-81	s	RES, CHIP 100K
R526	1-218-973-81	s	RES, CHIP 47K
R527	1-218-965-81	s	RES, CHIP 10K
R528	1-218-953-81	s	RES, CHIP 1.0K
R529	1-218-961-81	s	RES, CHIP 4.7K
R530	1-218-957-81	s	RES, CHIP 2.2K
R531	1-218-965-81	s	RES, CHIP 10K
R532	1-218-965-81	s	RES, CHIP 10K
R533	1-218-965-81	s	RES, CHIP 10K
R534	1-218-977-81	s	RES, CHIP 100K
R535	1-208-933-81	s	RES, CHIP 82K (1005)
R536	1-218-937-81	s	RES, CHIP 47
R537	1-218-965-81	s	RES, CHIP 10K
R538	1-218-929-81	s	RES, CHIP 10
R539	1-218-965-81	s	RES, CHIP 10K
R540	1-218-941-81	s	RES, CHIP 100
R541	1-218-929-81	s	RES, CHIP 10
R542	1-218-965-81	s	RES, CHIP 10K
R543	1-218-929-81	s	RES, CHIP 10
R544	1-218-969-81	s	RES, CHIP 22K
R545	1-218-929-81	s	RES, CHIP 10
R546	1-218-989-81	s	RES, CHIP 1M
R547	1-218-953-81	s	RES, CHIP 1.0K
R548	1-218-965-81	s	RES, CHIP 10K
R549	1-218-965-81	s	RES, CHIP 10K
R550	1-218-941-81	s	RES, CHIP 100
R551	1-218-941-81	s	RES, CHIP 100
R552	1-218-941-81	s	RES, CHIP 100
R553	1-218-965-81	s	RES, CHIP 10K
R554	1-218-965-81	s	RES, CHIP 10K
R555	1-218-941-81	s	RES, CHIP 100
R556	1-218-945-81	s	RES, CHIP 220
R557	1-218-941-81	s	RES, CHIP 100
R558	1-218-941-81	s	RES, CHIP 100
R559	1-218-941-81	s	RES, CHIP 100
R560	1-218-929-81	s	RES, CHIP 10
R561	1-218-929-81	s	RES, CHIP 10
R562	1-218-941-81	s	RES, CHIP 100
R563	1-218-941-81	s	RES, CHIP 100
R564	1-218-941-81	s	RES, CHIP 100
R565	1-218-941-81	s	RES, CHIP 100
R567	1-218-941-81	s	RES, CHIP 100
R568	1-218-941-81	s	RES, CHIP 100
R571	1-218-941-81	s	RES, CHIP 100
R572	1-218-957-81	s	RES, CHIP 2.2K
R573	1-218-941-81	s	RES, CHIP 100
R574	1-218-941-81	s	RES, CHIP 100
R575	1-218-941-81	s	RES, CHIP 100

(DPR-265C BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R576	1-218-957-81	s	RES, CHIP 2.2K
R577	1-218-957-81	s	RES, CHIP 2.2K
R578	1-218-973-81	s	RES, CHIP 47K
R579	1-218-941-81	s	RES, CHIP 100
R580	1-218-941-81	s	RES, CHIP 100
R581	1-218-941-81	s	RES, CHIP 100
R582	1-218-965-81	s	RES, CHIP 10K
R583	1-218-965-81	s	RES, CHIP 10K
R584	1-218-941-81	s	RES, CHIP 100
R585	1-218-941-81	s	RES, CHIP 100
R602	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R603	1-208-711-11	s	RES, CHIP 15K (1005)
R604	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R605	1-218-973-81	s	RES, CHIP 47K
R606	1-218-937-81	s	RES, CHIP 47
R607	1-218-953-81	s	RES, CHIP 1.0K
R608	1-218-953-81	s	RES, CHIP 1.0K
R609	1-218-965-81	s	RES, CHIP 10K
R610	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R611	1-218-973-81	s	RES, CHIP 47K
R612	1-218-973-81	s	RES, CHIP 47K
R613	1-218-973-81	s	RES, CHIP 47K
R614	1-218-953-81	s	RES, CHIP 1.0K
R615	1-218-953-81	s	RES, CHIP 1.0K
R616	1-218-953-81	s	RES, CHIP 1.0K
R618	1-208-873-81	s	RES, CHIP 270 (1005)
R619	1-218-973-81	s	RES, CHIP 47K
R620	1-218-953-81	s	RES, CHIP 1.0K
R621	1-218-953-81	s	RES, CHIP 1.0K
R622	1-218-953-81	s	RES, CHIP 1.0K
R623	1-218-953-81	s	RES, CHIP 1.0K
R624	1-218-953-81	s	RES, CHIP 1.0K
R625	1-218-953-81	s	RES, CHIP 1.0K
R626	1-218-953-81	s	RES, CHIP 1.0K
R627	1-218-953-81	s	RES, CHIP 1.0K
R628	1-218-973-81	s	RES, CHIP 47K
R629	1-218-973-81	s	RES, CHIP 47K
R630	1-211-990-91	s	RES, CHIP 75 (1608)
R631	1-211-990-91	s	RES, CHIP 75 (1608)
R632	1-211-990-91	s	RES, CHIP 75 (1608)
R633	1-211-990-91	s	RES, CHIP 75 (1608)
R634	1-208-891-81	s	RES, CHIP 1.5K (1005)
R635	1-218-953-81	s	RES, CHIP 1.0K
R636	1-208-891-81	s	RES, CHIP 1.5K (1005)
R637	1-218-973-81	s	RES, CHIP 47K
R638	1-218-953-81	s	RES, CHIP 1.0K
R639	1-218-973-81	s	RES, CHIP 47K
R640	1-218-973-81	s	RES, CHIP 47K
R641	1-218-965-81	s	RES, CHIP 10K
R642	1-211-990-91	s	RES, CHIP 75 (1608)
R643	1-211-990-91	s	RES, CHIP 75 (1608)
R644	1-218-969-81	s	RES, CHIP 22K
R645	1-218-823-91	s	RES, CHIP 100 (1608)
R646	1-218-823-91	s	RES, CHIP 100 (1608)
R647	1-218-957-81	s	RES, CHIP 2.2K
R648	1-218-957-81	s	RES, CHIP 2.2K
R649	1-218-957-81	s	RES, CHIP 2.2K
R650	1-218-973-81	s	RES, CHIP 47K
R651	1-211-990-91	s	RES, CHIP 75 (1608)

(DPR-265C BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R652	1-218-977-81	s	RES, CHIP 100K
R653	1-218-973-81	s	RES, CHIP 47K
R654	1-218-973-81	s	RES, CHIP 47K
R801	1-218-945-81	s	RES, CHIP 220
R802	1-218-945-81	s	RES, CHIP 220
R803	1-218-941-81	s	RES, CHIP 100
R804	1-218-941-81	s	RES, CHIP 100
R805	1-218-941-81	s	RES, CHIP 100
R806	1-218-941-81	s	RES, CHIP 100
R807	1-218-957-81	s	RES, CHIP 2.2K
R808	1-218-941-81	s	RES, CHIP 100
R810	1-218-941-81	s	RES, CHIP 100
R811	1-218-957-81	s	RES, CHIP 2.2K
R812	1-218-937-81	s	RES, CHIP 47
R813	1-218-941-81	s	RES, CHIP 100
R814	1-218-953-81	s	RES, CHIP 1.0K
R815	1-218-941-81	s	RES, CHIP 100
R816	1-218-929-81	s	RES, CHIP 10
R817	1-218-941-81	s	RES, CHIP 100
R818	1-218-941-81	s	RES, CHIP 100
R819	1-218-941-81	s	RES, CHIP 100
R820	1-218-941-81	s	RES, CHIP 100
R821	1-218-941-81	s	RES, CHIP 100
R822	1-218-941-81	s	RES, CHIP 100
R823	1-218-965-81	s	RES, CHIP 10K
R824	1-218-941-81	s	RES, CHIP 100
R825	1-218-941-81	s	RES, CHIP 100
R901	1-218-965-81	s	RES, CHIP 10K
R902	1-218-965-81	s	RES, CHIP 10K
R903	1-218-941-81	s	RES, CHIP 100
R904	1-218-941-81	s	RES, CHIP 100
R905	1-218-941-81	s	RES, CHIP 100
R906	1-218-941-81	s	RES, CHIP 100
R907	1-218-965-81	s	RES, CHIP 10K
R908	1-218-965-81	s	RES, CHIP 10K
R909	1-218-965-81	s	RES, CHIP 10K
R910	1-218-941-81	s	RES, CHIP 100
R911	1-218-941-81	s	RES, CHIP 100
R912	1-218-965-81	s	RES, CHIP 10K
R913	1-218-965-81	s	RES, CHIP 10K
R914	1-218-965-81	s	RES, CHIP 10K
R915	1-218-941-81	s	RES, CHIP 100
R916	1-218-941-81	s	RES, CHIP 100
R917	1-218-941-81	s	RES, CHIP 100
R918	1-218-941-81	s	RES, CHIP 100
R919	1-218-965-81	s	RES, CHIP 10K
R920	1-218-965-81	s	RES, CHIP 10K
R921	1-218-965-81	s	RES, CHIP 10K
R922	1-218-941-81	s	RES, CHIP 100
R923	1-218-941-81	s	RES, CHIP 100
R924	1-218-965-81	s	RES, CHIP 10K
R925	1-218-965-81	s	RES, CHIP 10K
R926	1-218-965-81	s	RES, CHIP 10K
R927	1-218-941-81	s	RES, CHIP 100
R928	1-218-941-81	s	RES, CHIP 100
R929	1-218-941-81	s	RES, CHIP 100
R930	1-218-941-81	s	RES, CHIP 100
R931	1-218-965-81	s	RES, CHIP 10K
R932	1-218-965-81	s	RES, CHIP 10K

(DPR-265C BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R933	1-218-965-81	s	RES, CHIP 10K
R934	1-218-941-81	s	RES, CHIP 100
R935	1-218-941-81	s	RES, CHIP 100
R936	1-218-965-81	s	RES, CHIP 10K
RB101	1-234-380-21	s	RES, NETWORK 47K (1005X4)
RB102	1-234-380-21	s	RES, NETWORK 47K (1005X4)
RB103	1-234-380-21	s	RES, NETWORK 47K (1005X4)
RB104	1-234-380-21	s	RES, NETWORK 47K (1005X4)
RB105	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB106	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB107	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB108	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB110	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB111	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB112	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB113	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB301	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB302	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB303	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB304	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB306	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB307	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB308	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB309	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB310	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB311	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB312	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB313	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB314	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB316	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB317	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB318	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB320	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB321	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB322	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB323	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB324	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB325	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB326	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB327	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB328	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB329	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB330	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB331	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB332	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB333	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB334	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB336	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB337	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB338	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB340	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB341	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB342	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB343	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB344	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB345	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB346	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB347	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB348	1-234-371-21	s	RES, NETWORK 47 (1005X4)

(DPR-265C BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB349	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB350	1-234-380-21	s	RES, NETWORK 47K (1005X4)
RB351	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB352	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB353	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB354	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB355	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB356	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB357	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB358	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB359	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB360	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB361	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB362	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB363	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB364	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB365	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB366	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB367	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB368	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB369	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB370	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB371	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB372	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB373	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB374	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB375	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB376	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB377	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB378	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB379	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB402	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB403	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB404	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB405	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB406	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB407	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB408	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB409	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB410	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB411	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB412	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB413	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB414	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB415	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB416	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB417	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB418	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB419	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB420	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB421	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB422	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB423	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB424	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB425	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB426	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB427	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB501	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB502	1-234-372-21	s	RES, NETWORK 100 (1005X4)

(DPR-265C BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB503	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB504	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB505	1-234-369-21	s	RES, NETWORK 10 (1005X4)
RB506	1-234-369-21	s	RES, NETWORK 10 (1005X4)
RB601	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB602	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB603	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB604	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB605	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB606	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB801	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB802	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB803	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB804	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB805	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB806	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB807	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB809	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB810	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB811	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB813	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB814	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB815	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB816	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB817	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB818	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB819	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB820	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB821	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB822	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB823	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB824	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB825	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB826	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB827	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB828	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB829	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB830	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB831	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB832	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB833	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB834	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB835	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB836	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB837	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB838	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB839	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB840	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB901	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB902	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB903	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB904	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB905	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB906	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB907	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB908	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB909	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB910	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB911	1-234-371-21	s	RES, NETWORK 47 (1005X4)

(DPR-265C BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB912	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB913	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB914	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB915	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB916	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB917	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB918	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB919	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB920	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB921	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB922	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB923	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB924	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB925	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB926	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB927	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB928	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB929	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB930	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB931	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB932	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB933	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB934	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB935	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB936	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB937	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB938	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB939	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB940	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB941	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB942	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB943	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB944	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB945	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB946	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB947	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB948	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB949	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB950	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB951	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB952	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB953	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB954	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB955	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB956	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB957	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB958	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB959	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB960	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB961	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB962	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB963	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB964	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB965	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB966	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB967	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB968	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB969	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB970	1-234-371-21	s	RES, NETWORK 47 (1005X4)

(DPR-265C BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB971	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB972	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB973	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB974	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB975	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB976	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB977	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB978	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB979	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB980	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB981	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB982	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB983	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB984	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB985	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB986	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB987	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB988	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB989	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB990	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB991	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB992	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB993	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB994	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB995	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB996	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB997	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB998	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB999	1-234-371-21	s	RES, NETWORK 47 (1005X4)
S13	1-771-709-41	s	SWITCH, SLIDE
THP101	1-804-616-21	s	THERMISTOR, POSITIVE
THP102	1-804-616-21	s	THERMISTOR, POSITIVE
THP103	1-804-616-21	s	THERMISTOR, POSITIVE
THP104	1-804-616-21	s	THERMISTOR, POSITIVE
THP105	1-804-458-21	s	THERMISTOR, POSITIVE
THP106	1-804-616-21	s	THERMISTOR, POSITIVE
TP1	1-535-877-22	s	CHIP, CHECKER
TP2	1-535-877-22	s	CHIP, CHECKER
TP3	1-535-877-22	s	CHIP, CHECKER
TP4	1-535-877-22	s	CHIP, CHECKER
TP501	1-535-877-22	s	CHIP, CHECKER
TP502	1-535-877-22	s	CHIP, CHECKER
X501	1-795-670-12	s	OSCILLATOR, CRYSTAL (VCXO)3.3V
X503	1-813-212-11	s	OSCILLATOR, CRYSTAL

DR-528 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1159-981-A	s	MOUNTED CIRCUIT BOARD, DR-528G (GOLD)
	A-1099-260-A	s	MOUNTED CIRCUIT BOARD, DR-528 (SILVER)
C1	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C2	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C3	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C4	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C5	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C6	1-165-884-91	s	CAPACITOR, CERAMIC 2.2MF(1608)
C7	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C8	1-165-884-91	s	CAPACITOR, CERAMIC 2.2MF(1608)
C9	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C10	1-115-339-11	s	CAPACITOR,CERAMIC 0.1MF/50V
C11	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C12	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C13	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C14	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C15	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C16	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C17	1-165-872-21	s	CAPACITOR,SOLID ELECT 47MF
C18	1-165-884-91	s	CAPACITOR, CERAMIC 2.2MF(1608)
C19	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C20	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C21	1-115-339-11	s	CAPACITOR,CERAMIC 0.1MF/50V
C22	1-165-881-21	s	CAPACITOR, ELECT 120MF(6.3X6)
C23	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C24	1-165-872-21	s	CAPACITOR,SOLID ELECT 47MF
C25	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C26	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C27	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C28	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C29	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C30	1-131-661-11	s	CAPACITOR,ELECT 100MF/10V CHIP
C31	1-100-743-91	s	CAPACITOR,CERAMIC2.2MF B(2012)
C32	1-100-743-91	s	CAPACITOR,CERAMIC2.2MF B(2012)
C33	1-135-343-11	s	CAPACITOR,SOLID ELECT 120MF
C34	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C35	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C36	1-100-165-21	s	CAP, ELECT 47MF (8X7)
C37	1-135-343-11	s	CAPACITOR,SOLID ELECT 120MF
C38	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C39	1-115-339-11	s	CAPACITOR,CERAMIC 0.1MF/50V
C40	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C41	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C42	1-165-884-91	s	CAPACITOR, CERAMIC 2.2MF(1608)
C43	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C44	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C45	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C46	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C47	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C48	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C49	1-115-339-11	s	CAPACITOR,CERAMIC 0.1MF/50V
C50	1-165-629-11	s	CAPACITOR,CERAMIC 1MF B
C51	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C52	1-115-339-11	s	CAPACITOR,CERAMIC 0.1MF/50V
C53	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C54	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C55	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V

(DR-528 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C56	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C57	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C58	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C60	1-115-339-11	s	CAPACITOR,CERAMIC 0.1MF/50V
C61	1-115-339-11	s	CAPACITOR,CERAMIC 0.1MF/50V
C62	1-115-339-11	s	CAPACITOR,CERAMIC 0.1MF/50V
C63	1-126-398-11	s	CAPACITOR ELECT 4.7MF/35V(CHIP
C64	1-115-339-11	s	CAPACITOR,CERAMIC 0.1MF/50V
C65	1-126-398-11	s	CAPACITOR ELECT 4.7MF/35V(CHIP
C66	1-115-339-11	s	CAPACITOR,CERAMIC 0.1MF/50V
C67	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C68	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C71	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C72	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C73	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C74	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
CN1	1-778-535-31	s	CONNECTOR, FFC/FPC(ZIF) AN 45P (GOLD)
	1-778-535-11	o	CONNECTOR, FFC (ZIF) 45P (SILVER)
CN2	1-764-441-51	s	CONNECTOR, FPC 30P (GOLD)
	1-764-441-21	s	CONNECTOR, FPC (30P) (SILVER)
CN3	1-695-209-21	s	PIN, CONNECTOR (PC BOARD) 15P
CN4	1-770-677-11	o	CONNECTOR,BOARD TO BOARD 50P
D1	8-719-043-70	s	DIODE MA6S121-(TX)
D2	8-719-043-70	s	DIODE MA6S121-(TX)
D3	8-719-210-43	s	DIODE EC10QS06
D4	8-719-043-70	s	DIODE MA6S121-(TX)
D5	8-719-043-70	s	DIODE MA6S121-(TX)
D6	8-719-059-52	s	DIODE MA3J14300LSO
D7	8-719-059-52	s	DIODE MA3J14300LSO
D8	8-719-421-27	s	DIODE MA728
E1	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
FB1	1-469-100-21	s	FERRITE, EMI (SMD) (1608)
FB2	1-469-100-21	s	FERRITE, EMI (SMD) (1608)
FB3	1-469-100-21	s	FERRITE, EMI (SMD) (1608)
FB4	1-469-100-21	s	FERRITE, EMI (SMD) (1608)
FB5	1-469-100-21	s	FERRITE, EMI (SMD) (1608)
FB6	1-469-100-21	s	FERRITE, EMI (SMD) (1608)
FB7	1-469-100-21	s	FERRITE, EMI (SMD) (1608)
FB8	1-469-100-21	s	FERRITE, EMI (SMD) (1608)
FB9	1-469-100-21	s	FERRITE, EMI (SMD) (1608)
FB10	1-469-100-21	s	FERRITE, EMI (SMD) (1608)
FB11	1-469-100-21	s	FERRITE, EMI (SMD) (1608)
FB12	1-469-100-21	s	FERRITE, EMI (SMD) (1608)
IC1	6-704-976-01	s	IC ADR381ART-REEL7
IC2	8-759-549-20	s	IC SN74LV541APWR
IC3	8-759-573-97	s	IC SN74LVC541APWR
IC4	8-759-573-97	s	IC SN74LVC541APWR
IC5	8-759-685-33	s	IC BU2500FV-E2
IC6	6-708-326-01	s	IC TC74HCT4053AFT(EL)
IC7	8-759-564-49	s	IC TC7W53FU-TE12R
IC8	8-759-564-49	s	IC TC7W53FU-TE12R
IC9	8-759-669-71	s	IC PCF8591T/2
IC10	8-759-327-01	s	IC NJM062V-TE2
IC11	8-759-327-01	s	IC NJM062V-TE2
IC12	8-759-327-01	s	IC NJM062V-TE2

(DR-528 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC13	8-759-327-01	s	IC NJM062V-TE2
IC14	8-759-327-01	s	IC NJM062V-TE2
L1	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L2	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L3	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L4	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L5	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
Q1	8-729-143-13	s	TRANSISTOR 2SC4176-B34
Q2	8-729-143-13	s	TRANSISTOR 2SC4176-B34
Q3	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q4	8-729-230-27	s	TRANSISTOR 2SA1213Y-TE12L
Q5	8-729-143-13	s	TRANSISTOR 2SC4176-B34
Q6	8-729-143-13	s	TRANSISTOR 2SC4176-B34
Q7	8-729-143-13	s	TRANSISTOR 2SC4176-B34
Q8	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q9	8-729-230-27	s	TRANSISTOR 2SA1213Y-TE12L
Q10	8-729-230-27	s	TRANSISTOR 2SA1213Y-TE12L
Q11	8-729-053-11	s	TRANSISTOR FDC6561AN
Q12	8-729-053-12	s	TRANSISTOR FDC6506P
Q13	8-729-053-12	s	TRANSISTOR FDC6506P
Q14	8-729-053-12	s	TRANSISTOR FDC6506P
Q15	8-729-053-12	s	TRANSISTOR FDC6506P
Q16	8-729-053-11	s	TRANSISTOR FDC6561AN
Q17	8-729-053-11	s	TRANSISTOR FDC6561AN
Q18	8-729-053-11	s	TRANSISTOR FDC6561AN
Q19	8-729-143-13	s	TRANSISTOR 2SC4176-B34
Q20	8-729-230-27	s	TRANSISTOR 2SA1213Y-TE12L
Q21	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q22	8-729-807-51	s	TRANSISTOR 2SD1623-S
Q23	8-729-143-13	s	TRANSISTOR 2SC4176-B34
Q24	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q25	8-729-143-13	s	TRANSISTOR 2SC4176-B34
Q26	8-729-143-13	s	TRANSISTOR 2SC4176-B34
Q27	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q28	8-729-143-13	s	TRANSISTOR 2SC4176-B34
Q29	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q30	8-729-053-11	s	TRANSISTOR FDC6561AN
Q31	8-729-053-12	s	TRANSISTOR FDC6506P
Q32	8-729-053-12	s	TRANSISTOR FDC6506P
Q33	8-729-143-13	s	TRANSISTOR 2SC4176-B34
Q34	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q35	8-729-053-11	s	TRANSISTOR FDC6561AN
Q36	8-729-106-60	s	TRANSISTOR 2SB1115A
Q37	8-729-421-71	s	TRANSISTOR 2SK620
R1	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R2	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R3	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R4	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R5	1-208-893-11	s	RESISTOR, CHIP 1.8K (1005)
R6	1-208-703-11	s	RESISTOR,CHIP 6.8K 1/16W(1005)
R7	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R8	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005
R9	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R10	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R11	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R12	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R13	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R14	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)

(DR-528 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R15	1-208-893-11	s	RESISTOR, CHIP 1.8K (1005)
R16	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R17	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005
R18	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R19	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R20	1-208-905-11	s	RESISTOR, CHIP 5.6K (1005)
R21	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R22	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R23	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R24	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R25	1-220-803-81	s	RESISTOR,CHIP4.7 1/16W (1005)
R26	1-220-803-81	s	RESISTOR,CHIP4.7 1/16W (1005)
R27	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R28	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R29	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R30	1-208-703-11	s	RESISTOR,CHIP 6.8K 1/16W(1005)
R31	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R32	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R33	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R34	1-208-679-11	s	RESISTOR CHIP 680 1/16W (1005)
R35	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R36	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R38	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R39	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R40	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R41	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R42	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R43	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R44	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R45	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R46	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R47	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R48	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R49	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R50	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R51	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R52	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R53	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R54	1-208-713-11	s	RESISTOR CHIP 18K 1/16W (1005)
R55	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R56	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R57	1-208-893-11	s	RESISTOR, CHIP 1.8K (1005)
R58	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005
R59	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R60	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R61	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R62	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R63	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R64	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R65	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R66	1-220-803-81	s	RESISTOR,CHIP4.7 1/16W (1005)
R67	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R68	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R69	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R70	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R71	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R72	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R73	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R74	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)

(DR-528 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R75	1-220-874-11	s	RES, CHIP 15 (1005)
R76	1-220-874-11	s	RES, CHIP 15 (1005)
R77	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R78	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R79	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R80	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R82	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R83	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R84	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R85	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R86	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R93	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R94	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R95	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R96	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R97	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R98	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R99	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R100	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
RB3	1-234-370-11	s	RES, NETWORK 22X4 (1005)
RB4	1-234-381-21	s	RES, NETWORK 100KX4 (1005)
RB5	1-234-381-21	s	RES, NETWORK 100KX4 (1005)

DR-562 BOARD

---

*1: [Board No. suffix 11]
*2: [Board No. suffix 21-]

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1159-993-A	s	MOUNTED CIRCUIT BOARD, DR-562G (GOLD)
	A-1099-205-A	s	MOUNTED CIRCUIT BOARD, DR-562 (SILVER)
C1	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C2	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C3	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C4	1-165-884-91	s	CAPACITOR, CERAMIC 2.2MF(1608)
C5	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C6	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C7	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C8	1-115-339-11	s	CAPACITOR,CERAMIC 0.1MF/50V
C9	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C10	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C11	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C12	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C13	1-165-872-21	s	CAPACITOR,SOLID ELECT 47MF
C14	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C15	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C16	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C17	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C18	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C19	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C20	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C21	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C22	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C23	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C24	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C25	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C26	1-115-339-11	s	CAPACITOR,CERAMIC 0.1MF/50V
C27	1-165-884-91	s	CAPACITOR, CERAMIC 2.2MF(1608)
C28	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C29	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C30	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C31	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C32	1-165-884-91	s	CAPACITOR, CERAMIC 2.2MF(1608)
C33	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C34	1-165-881-21	s	CAPACITOR, ELECT 120MF(6.3X6)
C35	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C36	1-165-872-21	s	CAPACITOR,SOLID ELECT 47MF
C37	1-135-343-11	s	CAPACITOR,SOLID ELECT 120MF
C38	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C39	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C40	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C41	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C42	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C43	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C44	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C45	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C46	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C47	1-107-886-11	s	CAPACITOR ELECT 4700MF/16V(105
C48	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C49	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C50	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C51	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C52	1-100-743-91	s	CAPACITOR,CERAMIC2.2MF B(2012)
C53	1-100-743-91	s	CAPACITOR,CERAMIC2.2MF B(2012)

(DR-562 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C54	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C55	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C56	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C57	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C58	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C59	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C60	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C61	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C62	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C63	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C64	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C65	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C66	1-100-165-21	s	CAP, ELECT 47MF (8X7)
C67	1-135-343-11	s	CAPACITOR,SOLID ELECT 120MF
C68	1-115-339-11	s	CAPACITOR,CERAMIC 0.1MF/50V
C69	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C70	1-165-884-91	s	CAPACITOR, CERAMIC 2.2MF(1608)
C71	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C72	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C73	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C74	1-115-339-11	s	CAPACITOR,CERAMIC 0.1MF/50V
C75	1-165-629-11	s	CAPACITOR,CERAMIC 1MF B
C76	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C77	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C78	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C79	1-165-908-11	s	CAP, CERAMIC 1MF B 1608
C80	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C82	1-115-339-11	s	CAPACITOR,CERAMIC 0.1MF/50V
C83	1-115-339-11	s	CAPACITOR,CERAMIC 0.1MF/50V
C84	1-115-339-11	s	CAPACITOR,CERAMIC 0.1MF/50V
C85	1-126-398-11	s	CAPACITOR ELECT 4.7MF/35V(CHIP
C86	1-115-339-11	s	CAPACITOR,CERAMIC 0.1MF/50V
C87	1-126-398-11	s	CAPACITOR ELECT 4.7MF/35V(CHIP
C88	1-115-339-11	s	CAPACITOR,CERAMIC 0.1MF/50V
C89	1-115-339-11	s	CAPACITOR,CERAMIC 0.1MF/50V
C90	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C91	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C92	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C93	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C94	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C95	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C96	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C97	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C98	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C99	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
CN1	1-778-451-31	s	CONNECTOR, FFC/FPC(ZIF) AN 50P (GOLD)
	1-778-451-11	o	CONNECTOR, FPC (50P) (SILVER)
CN2	1-764-441-51	s	CONNECTOR, FPC 30P (GOLD)
	1-764-441-21	s	CONNECTOR, FPC (30P) (SILVER)
CN3	1-695-209-21	s	PIN, CONNECTOR (PC BOARD) 15P
D1	8-719-043-70	s	DIODE MA6S121-(TX)
D2	8-719-043-70	s	DIODE MA6S121-(TX)
D3	8-719-043-70	s	DIODE MA6S121-(TX)
D4	8-719-043-70	s	DIODE MA6S121-(TX)
D5	8-719-043-70	s	DIODE MA6S121-(TX)

(DR-562 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description	
D6	8-719-210-43	s	DIODE EC10QS06	
D7	8-719-043-70	s	DIODE MA6S121-(TX)	
D8	8-719-043-70	s	DIODE MA6S121-(TX)	
D9	8-719-043-70	s	DIODE MA6S121-(TX)	
D10	8-719-043-70	s	DIODE MA6S121-(TX)	
D11	8-719-043-70	s	DIODE MA6S121-(TX)	
D12	8-719-059-52	s	DIODE MA3J14300LSO	
D13	8-719-059-52	s	DIODE MA3J14300LSO	
D14	8-719-059-52	s	DIODE MA3J14300LSO	
E1	1-535-877-22	s	CHIP,CHECKER (TEST POINT)	
FB1	1-469-100-21	s	FERRITE, EMI (SMD)	(1608)
FB2	1-469-100-21	s	FERRITE, EMI (SMD)	(1608)
FB3	1-469-100-21	s	FERRITE, EMI (SMD)	(1608)
FB4	1-469-100-21	s	FERRITE, EMI (SMD)	(1608)
FB5	1-469-100-21	s	FERRITE, EMI (SMD)	(1608)
FB6	1-469-100-21	s	FERRITE, EMI (SMD)	(1608)
FB7	1-469-100-21	s	FERRITE, EMI (SMD)	(1608)
FB8	1-469-100-21	s	FERRITE, EMI (SMD)	(1608)
FB9	1-469-100-21	s	FERRITE, EMI (SMD)	(1608)
FB10	1-469-100-21	s	FERRITE, EMI (SMD)	(1608)
FB11	1-469-100-21	s	FERRITE, EMI (SMD)	(1608)
FB12	1-469-100-21	s	FERRITE, EMI (SMD)	(1608)
FB13	1-469-100-21	s	FERRITE, EMI (SMD)	(1608)
FB14	1-469-100-21	s	FERRITE, EMI (SMD)	(1608)
FB15	1-469-100-21	s	FERRITE, EMI (SMD)	(1608)
FB16	1-469-100-21	s	FERRITE, EMI (SMD)	(1608)
FB17	1-469-100-21	s	FERRITE, EMI (SMD)	(1608)
FB18	1-469-100-21	s	FERRITE, EMI (SMD)	(1608)
FB19	1-469-100-21	s	FERRITE, EMI (SMD)	(1608)
FB20	1-469-100-21	s	FERRITE, EMI (SMD)	(1608)
FB21	1-469-100-21	s	FERRITE, EMI (SMD)	(1608)
FB22	1-469-100-21	s	FERRITE, EMI (SMD)	(1608)
FB23	1-469-100-21	s	FERRITE, EMI (SMD)	(1608)
FB24	1-469-100-21	s	FERRITE, EMI (SMD)	(1608)
FB25	1-469-100-21	s	FERRITE, EMI (SMD)	(1608)
FB26	1-469-100-21	s	FERRITE, EMI (SMD)	(1608)
FB27	1-469-100-21	s	FERRITE, EMI (SMD)	(1608)
FB28	1-469-100-21	s	FERRITE, EMI (SMD)	(1608)
FB29	1-469-100-21	s	FERRITE, EMI (SMD)	(1608)
FB30	1-469-100-21	s	FERRITE, EMI (SMD)	(1608)
FB31	1-469-100-21	s	FERRITE, EMI (SMD)	(1608)
FB32	1-469-100-21	s	FERRITE, EMI (SMD)	(1608)
FB33	1-469-100-21	s	FERRITE, EMI (SMD)	(1608)
FB34	1-469-100-21	s	FERRITE, EMI (SMD)	(1608)
FB35	1-469-100-21	s	FERRITE, EMI (SMD)	(1608)
FB36	1-469-100-21	s	FERRITE, EMI (SMD)	(1608)
IC1	8-759-573-97	s	IC SN74LVC541APWR	
IC2	8-759-573-97	s	IC SN74LVC541APWR	
IC3	6-704-976-01	s	IC ADR381ART-REEL7	
IC4	8-759-573-97	s	IC SN74LVC541APWR	
IC5	8-759-573-97	s	IC SN74LVC541APWR	
IC6	8-759-573-97	s	IC SN74LVC541APWR	
IC7	8-759-573-97	s	IC SN74LVC541APWR	
IC8	8-759-685-33	s	IC BU2500FV-E2	
IC9	6-708-326-01	s	IC TC74HCT4053AFT(EL)	
IC10	8-759-564-49	s	IC TC7W53FU-TE12R	
IC11	8-759-564-49	s	IC TC7W53FU-TE12R	

(DR-562 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC12	8-759-669-71	s	IC PCF8591T/2
IC13	8-759-327-01	s	IC NJM062V-TE2
IC14	8-759-381-53	s	IC UPC814G2-E2
IC15	8-759-327-01	s	IC NJM062V-TE2
IC16	8-759-327-01	s	IC NJM062V-TE2
IC17	8-759-327-01	s	IC NJM062V-TE2
IC18	6-708-326-01	s	IC TC74HCT4053AFT(EL)
L1	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L2	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L3	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L5	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
Q1	8-729-143-13	s	TRANSISTOR 2SC4176-B34
Q2	8-729-143-13	s	TRANSISTOR 2SC4176-B34
Q3	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q4	8-729-230-27	s	TRANSISTOR 2SA1213Y-TE12L
Q5	8-729-143-13	s	TRANSISTOR 2SC4176-B34
Q6	8-729-143-13	s	TRANSISTOR 2SC4176-B34
Q7	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q8	8-729-053-11	s	TRANSISTOR FDC6561AN
Q9	8-729-053-12	s	TRANSISTOR FDC6506P
Q10	8-729-143-13	s	TRANSISTOR 2SC4176-B34
Q11	8-729-230-27	s	TRANSISTOR 2SA1213Y-TE12L
Q12	8-729-053-12	s	TRANSISTOR FDC6506P
Q13	8-729-053-12	s	TRANSISTOR FDC6506P
Q14	8-729-053-12	s	TRANSISTOR FDC6506P
Q15	8-729-053-12	s	TRANSISTOR FDC6506P
Q16	8-729-053-12	s	TRANSISTOR FDC6506P
Q17	8-729-053-12	s	TRANSISTOR FDC6506P
Q18	8-729-053-12	s	TRANSISTOR FDC6506P
Q19	8-729-230-27	s	TRANSISTOR 2SA1213Y-TE12L
Q20	8-729-053-11	s	TRANSISTOR FDC6561AN
Q21	8-729-053-11	s	TRANSISTOR FDC6561AN
Q22	8-729-053-11	s	TRANSISTOR FDC6561AN
Q23	8-729-053-11	s	TRANSISTOR FDC6561AN
Q24	8-729-053-11	s	TRANSISTOR FDC6561AN
Q25	8-729-053-11	s	TRANSISTOR FDC6561AN
Q26	8-729-053-11	s	TRANSISTOR FDC6561AN
Q27	8-729-143-13	s	TRANSISTOR 2SC4176-B34
Q28	8-729-230-27	s	TRANSISTOR 2SA1213Y-TE12L
Q29	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q30	8-729-049-93	s	TRANSISTOR 2SD2098-T100R
Q31	8-729-143-13	s	TRANSISTOR 2SC4176-B34
Q32	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q33	8-729-143-13	s	TRANSISTOR 2SC4176-B34
Q34	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q35	8-729-143-13	s	TRANSISTOR 2SC4176-B34
Q36	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q37	8-729-106-60	s	TRANSISTOR 2SB1115A
Q38	8-729-421-71	s	TRANSISTOR 2SK620
Q39	8-729-117-32	s	TRANSISTOR 2SC4177
R1	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R2	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R3	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R4	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R5	1-208-703-11	s	RESISTOR,CHIP 6.8K 1/16W(1005)
R6	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R7	1-208-893-11	s	RESISTOR, CHIP 1.8K (1005)
R8	1-208-911-11	s	RESISTOR, CHIP 10K (1005)

(DR-562 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R9	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005
R10	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R11	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R12	1-208-893-11	s	RESISTOR, CHIP 1.8K (1005)
R13	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005
R14	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R15	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R16	1-220-803-81	s	RESISTOR,CHIP4.7 1/16W (1005)
R17	1-208-709-11	s	RESISTOR CHIP 12K 1/16W (1005)
R18	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R19	1-220-803-81	s	RESISTOR,CHIP4.7 1/16W (1005)
R20	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R21	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R22	1-208-905-11	s	RESISTOR, CHIP 5.6K (1005)
R23	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R24	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R25	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R26	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R27	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R28	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R29	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R30	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R31	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R32	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R33	1-218-958-11	s	RESISTOR,CHIP 2.7K 1/16W(1005)
R34	1-208-873-11	s	RESISTOR,CHIP 270 1/16W (1005)
R35	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R36	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R38	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R39	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R40	*1 1-218-939-11	s	METAL CHIP 68 0.5% 1/16W
	*2 1-218-945-11	s	METAL CHIP 220 0.5% 1/16W
R41	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R42	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R43	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R44	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R45	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R46	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R47	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R48	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R49	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R50	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R51	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R52	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R53	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R54	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R55	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R56	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R57	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R58	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R59	1-218-970-11	s	RESISTOR CHIP 27K 1/16W (1005)
R60	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R61	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R62	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R63	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R64	1-218-970-11	s	RESISTOR CHIP 27K 1/16W (1005)
R65	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R66	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R67	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)

(DR-562 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R68	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R69	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R70	1-220-874-11	s	RES, CHIP 15 (1005)
R71	1-220-874-11	s	RES, CHIP 15 (1005)
R72	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R73	1-218-970-11	s	RESISTOR CHIP 27K 1/16W (1005)
R74	1-208-905-11	s	RESISTOR, CHIP 5.6K (1005)
R75	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R76	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R77	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R78	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R79	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R80	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R81	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R82	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R83	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R84	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R85	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R86	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R93	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R94	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R95	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R97	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R98	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R99	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R100	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R101	1-218-606-11	s	RESISTOR,CHIP 2.2/1W (6331)
R102	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R103	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
RB3	1-234-370-11	s	RES, NETWORK 22X4 (1005)
RB4	1-234-370-11	s	RES, NETWORK 22X4 (1005)
RB5	1-234-370-11	s	RES, NETWORK 22X4 (1005)
RB6	1-234-381-21	s	RES, NETWORK 100KX4 (1005)
RB7	1-234-381-21	s	RES, NETWORK 100KX4 (1005)
RB8	1-234-381-21	s	RES, NETWORK 100KX4 (1005)
RB9	1-234-381-21	s	RES, NETWORK 100KX4 (1005)
RB10	1-234-381-21	s	RES, NETWORK 100KX4 (1005)
RB11	1-234-381-21	s	RES, NETWORK 100KX4 (1005)

FL-337 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1142-713-A	s	MOUNTED CIRCUIT BOARD, FL-337
C1	⚠ 1-113-925-51	s	CAP, CERAMIC 10000PF F
C2	⚠ 1-113-925-51	s	CAP, CERAMIC 10000PF F
C3	⚠ 1-136-206-11	s	CAP, METALIZED FILM 0.033MF
CN1	1-691-291-11	o	PIN, CONNECTOR (PC BOARD) 5P
CN2	1-750-880-11	s	RECEPTACLE, COAXIAL CONNECTOR
CN3	1-819-986-11	s	PIN, CONNECTOR (PC BOARD) 3P
FB1	1-469-979-21	s	INDUCTOR, FERRITE BEAD
FB2	1-469-979-21	s	INDUCTOR, FERRITE BEAD
FB3	1-469-979-21	s	INDUCTOR, FERRITE BEAD
L1	1-412-963-21	s	INDUCTOR 100UH (2520)
L2	1-412-963-21	s	INDUCTOR 100UH (2520)

FL-338 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1144-417-A	s	MOUNTED CIRCUIT BOARD, FL-338
C1	⚠ 1-136-199-11	s	CAP, METALIZED FILM 0.1MF
C2	⚠ 1-136-206-11	s	CAP, METALIZED FILM 0.033MF
C3	⚠ 1-136-206-11	s	CAP, METALIZED FILM 0.033MF
FB1	1-469-979-21	s	INDUCTOR, FERRITE BEAD
FB2	1-469-979-21	s	INDUCTOR, FERRITE BEAD
FB3	1-469-979-21	s	INDUCTOR, FERRITE BEAD
FB4	1-469-979-21	s	INDUCTOR, FERRITE BEAD
L1	1-416-831-11	s	COIL, CHOKE 100UH
L2	1-416-831-11	s	COIL, CHOKE 100UH
L3	1-416-831-11	s	COIL, CHOKE 100UH
L4	1-416-831-11	s	COIL, CHOKE 100UH
L5	1-416-831-11	s	COIL, CHOKE 100UH

LE-291 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1126-981-A	s	MOUNTED CIRCUIT BOARD, LE-291
C2	1-107-420-11	s	CAPACITOR,ELECT 47MF/35V(105C)
C4	1-128-414-11	s	CAPACITOR ELECT 220MF/6.3V
C5	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C6	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C7	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C8	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C9	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C10	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C11	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C12	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C13	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C14	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C15	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C16	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C17	1-126-399-11	s	CAPACITOR ELECT 10MF/35V(CHIP)
C18	1-126-399-11	s	CAPACITOR ELECT 10MF/35V(CHIP)
C19	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
CN1	1-784-254-11	s	CONNECTOR 10P
D1	8-719-820-41	s	DIODE 1SS302
D2	8-719-989-53	s	LED CL-200HR-C-TSL
D3	8-719-989-53	s	LED CL-200HR-C-TSL
D4	8-719-989-53	s	LED CL-200HR-C-TSL
D5	8-719-989-53	s	LED CL-200HR-C-TSL
D6	8-719-989-53	s	LED CL-200HR-C-TSL
D7	8-719-989-53	s	LED CL-200HR-C-TSL
D8	8-719-989-53	s	LED CL-200HR-C-TSL
D9	8-719-989-53	s	LED CL-200HR-C-TSL
D10	8-719-989-53	s	LED CL-200HR-C-TSL
D11	8-719-989-53	s	LED CL-200HR-C-TSL
D12	8-719-989-53	s	LED CL-200HR-C-TSL
D13	8-719-989-53	s	LED CL-200HR-C-TSL
D14	8-719-989-53	s	LED CL-200HR-C-TSL
D15	8-719-989-53	s	LED CL-200HR-C-TSL
D16	8-719-989-53	s	LED CL-200HR-C-TSL
D17	8-719-989-53	s	LED CL-200HR-C-TSL
D18	8-719-989-53	s	LED CL-200HR-C-TSL
D19	8-719-989-53	s	LED CL-200HR-C-TSL
D20	8-719-989-53	s	LED CL-200HR-C-TSL
D21	8-719-989-53	s	LED CL-200HR-C-TSL
D22	8-719-989-53	s	LED CL-200HR-C-TSL
D23	8-719-989-53	s	LED CL-200HR-C-TSL
D24	8-719-989-53	s	LED CL-200HR-C-TSL
D25	8-719-989-53	s	LED CL-200HR-C-TSL
D26	8-719-989-53	s	LED CL-200HR-C-TSL
D27	8-719-989-53	s	LED CL-200HR-C-TSL
D28	8-719-989-53	s	LED CL-200HR-C-TSL
D29	8-719-989-53	s	LED CL-200HR-C-TSL
D30	8-719-989-53	s	LED CL-200HR-C-TSL
D31	8-719-989-53	s	LED CL-200HR-C-TSL
D32	8-719-989-53	s	LED CL-200HR-C-TSL
D33	8-719-989-53	s	LED CL-200HR-C-TSL
D34	8-719-989-53	s	LED CL-200HR-C-TSL
D35	8-719-989-53	s	LED CL-200HR-C-TSL
D36	8-719-989-53	s	LED CL-200HR-C-TSL
D37	8-719-989-53	s	LED CL-200HR-C-TSL
D38	8-719-989-53	s	LED CL-200HR-C-TSL

(LE-291 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
D39	8-719-989-53	s	LED CL-200HR-C-TSL
D40	8-719-989-53	s	LED CL-200HR-C-TSL
D41	8-719-989-53	s	LED CL-200HR-C-TSL
D42	8-719-989-53	s	LED CL-200HR-C-TSL
D43	8-719-989-53	s	LED CL-200HR-C-TSL
D44	8-719-989-53	s	LED CL-200HR-C-TSL
D45	8-719-989-53	s	LED CL-200HR-C-TSL
D46	8-719-989-53	s	LED CL-200HR-C-TSL
D47	8-719-989-53	s	LED CL-200HR-C-TSL
D48	8-719-989-53	s	LED CL-200HR-C-TSL
D49	8-719-989-53	s	LED CL-200HR-C-TSL
D50	8-719-989-53	s	LED CL-200HR-C-TSL
D51	8-719-989-53	s	LED CL-200HR-C-TSL
D52	8-719-989-53	s	LED CL-200HR-C-TSL
D53	8-719-989-53	s	LED CL-200HR-C-TSL
D54	8-719-989-53	s	LED CL-200HR-C-TSL
D55	8-719-989-53	s	LED CL-200HR-C-TSL
D56	8-719-989-53	s	LED CL-200HR-C-TSL
D57	8-719-989-53	s	LED CL-200HR-C-TSL
D58	8-719-989-53	s	LED CL-200HR-C-TSL
D59	8-719-989-53	s	LED CL-200HR-C-TSL
D60	8-719-989-53	s	LED CL-200HR-C-TSL
D61	8-719-989-53	s	LED CL-200HR-C-TSL
IC1	8-759-529-76	s	IC TC74VHC595FT(EL)
IC2	8-759-529-76	s	IC TC74VHC595FT(EL)
IC3	8-759-529-76	s	IC TC74VHC595FT(EL)
IC4	8-759-529-76	s	IC TC74VHC595FT(EL)
L1	1-416-510-21	s	COIL, CHOKE 100UH
L2	1-424-700-21	s	COIL, CHOKE (SMD) 100UH
Q1	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q2	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q3	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q4	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q5	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q6	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q7	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q8	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q9	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q10	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q11	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q12	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q13	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q14	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q15	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q16	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q17	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q18	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q19	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q20	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q21	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q22	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q23	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q24	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q25	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q26	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q27	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q28	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q29	8-729-928-55	s	TRANSISTOR DTA123JE-TL

(LE-291 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
Q30	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q31	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q32	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q33	8-729-807-51	s	TRANSISTOR 2SD1623-S
Q34	8-729-807-51	s	TRANSISTOR 2SD1623-S
Q35	8-729-807-51	s	TRANSISTOR 2SD1623-S
Q36	8-729-807-51	s	TRANSISTOR 2SD1623-S
Q37	8-729-807-51	s	TRANSISTOR 2SD1623-S
Q38	8-729-807-51	s	TRANSISTOR 2SD1623-S
Q39	8-729-807-51	s	TRANSISTOR 2SD1623-S
Q40	8-729-807-51	s	TRANSISTOR 2SD1623-S
Q41	8-729-807-51	s	TRANSISTOR 2SD1623-S
Q42	8-729-807-51	s	TRANSISTOR 2SD1623-S
Q43	8-729-807-51	s	TRANSISTOR 2SD1623-S
Q44	8-729-807-51	s	TRANSISTOR 2SD1623-S
Q45	8-729-807-51	s	TRANSISTOR 2SD1623-S
Q46	8-729-807-51	s	TRANSISTOR 2SD1623-S
Q47	8-729-807-51	s	TRANSISTOR 2SD1623-S
Q48	8-729-807-51	s	TRANSISTOR 2SD1623-S
Q49	8-729-807-51	s	TRANSISTOR 2SD1623-S
Q50	8-729-807-51	s	TRANSISTOR 2SD1623-S
Q51	8-729-807-51	s	TRANSISTOR 2SD1623-S
Q52	8-729-807-51	s	TRANSISTOR 2SD1623-S
Q53	8-729-807-51	s	TRANSISTOR 2SD1623-S
Q54	8-729-807-51	s	TRANSISTOR 2SD1623-S
Q55	8-729-807-51	s	TRANSISTOR 2SD1623-S
Q56	8-729-807-51	s	TRANSISTOR 2SD1623-S
Q57	8-729-807-51	s	TRANSISTOR 2SD1623-S
Q58	8-729-807-51	s	TRANSISTOR 2SD1623-S
Q59	8-729-807-51	s	TRANSISTOR 2SD1623-S
Q60	8-729-807-51	s	TRANSISTOR 2SD1623-S
Q61	8-729-927-99	s	TRANSISTOR 2SC4617R
Q62	8-729-928-81	s	TRANSISTOR DTC144EE
Q63	8-729-928-81	s	TRANSISTOR DTC144EE
R1	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R2	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R3	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R4	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R5	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R6	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R7	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R8	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R9	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R10	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R11	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R12	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R13	1-211-977-11	s	RESISTOR,CHIP 22 1/10W (1608)
R14	1-211-977-11	s	RESISTOR,CHIP 22 1/10W (1608)
R15	1-211-977-11	s	RESISTOR,CHIP 22 1/10W (1608)
R16	1-211-977-11	s	RESISTOR,CHIP 22 1/10W (1608)
R17	1-211-977-11	s	RESISTOR,CHIP 22 1/10W (1608)
R18	1-211-977-11	s	RESISTOR,CHIP 22 1/10W (1608)
R19	1-211-977-11	s	RESISTOR,CHIP 22 1/10W (1608)
R20	1-211-977-11	s	RESISTOR,CHIP 22 1/10W (1608)
R21	1-211-977-11	s	RESISTOR,CHIP 22 1/10W (1608)
R22	1-211-977-11	s	RESISTOR,CHIP 22 1/10W (1608)
R23	1-211-977-11	s	RESISTOR,CHIP 22 1/10W (1608)
R24	1-211-977-11	s	RESISTOR,CHIP 22 1/10W (1608)
R25	1-211-977-11	s	RESISTOR,CHIP 22 1/10W (1608)

(LE-291 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R26	1-211-977-11	s	RESISTOR,CHIP 22 1/10W (1608)
R27	1-211-977-11	s	RESISTOR,CHIP 22 1/10W (1608)
R28	1-211-977-11	s	RESISTOR,CHIP 22 1/10W (1608)
R29	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R30	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R31	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R32	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R33	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R34	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R35	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R36	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R37	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R38	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R39	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R40	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R41	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R42	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R43	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R44	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R45	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R46	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R47	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R48	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R49	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R50	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R51	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R52	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R53	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R54	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R55	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R56	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R57	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R58	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R59	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R60	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R61	1-218-939-11	s	RESISTOR, CHIP 68 1/16W (1005)
R62	1-218-939-11	s	RESISTOR, CHIP 68 1/16W (1005)
R63	1-218-939-11	s	RESISTOR, CHIP 68 1/16W (1005)
R64	1-218-939-11	s	RESISTOR, CHIP 68 1/16W (1005)
R65	1-218-939-11	s	RESISTOR, CHIP 68 1/16W (1005)
R66	1-218-939-11	s	RESISTOR, CHIP 68 1/16W (1005)
R67	1-218-939-11	s	RESISTOR, CHIP 68 1/16W (1005)
R68	1-218-939-11	s	RESISTOR, CHIP 68 1/16W (1005)
R69	1-218-939-11	s	RESISTOR, CHIP 68 1/16W (1005)
R70	1-218-939-11	s	RESISTOR, CHIP 68 1/16W (1005)
R71	1-218-939-11	s	RESISTOR, CHIP 68 1/16W (1005)
R72	1-218-939-11	s	RESISTOR, CHIP 68 1/16W (1005)
R73	1-218-236-91	s	RESISTOR,CHIP 1 1/4W
R74	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R75	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R76	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R77	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R78	1-208-911-11	s	RESISTOR, CHIP 10K (1005)

LE-308 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
C1	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
CN1	1-770-622-21	s	PIN, CONNECTOR 5P
D1	6-500-122-01	s	DIODE CL-375HR1YG-D-T
D2	6-500-122-01	s	DIODE CL-375HR1YG-D-T
D4	6-501-212-01	s	DIODE CL-221Y-C-TS
Q1	8-729-928-81	s	TRANSISTOR DTC144EE
Q2	8-729-928-81	s	TRANSISTOR DTC144EE
Q3	8-729-928-81	s	TRANSISTOR DTC144EE
Q4	8-729-928-81	s	TRANSISTOR DTC144EE
Q5	8-729-928-81	s	TRANSISTOR DTC144EE
Q6	8-729-928-81	s	TRANSISTOR DTC144EE
R1	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R2	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R3	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R4	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R5	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R6	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R7	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R8	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R10	1-216-864-11	s	CONDUCTOR, CHIP (1608)
S1	1-692-530-11	s	SWITCH,TOGGLE

LE-309 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1126-982-A	s	MOUNTED CIRCUIT BOARD, LE-309
D1	6-501-355-01	s	DIODE CL-197TD2-CD-T
D2	6-501-355-01	s	DIODE CL-197TD2-CD-T
D3	6-501-355-01	s	DIODE CL-197TD2-CD-T
D4	6-501-355-01	s	DIODE CL-197TD2-CD-T
D5	6-501-355-01	s	DIODE CL-197TD2-CD-T
D6	6-501-355-01	s	DIODE CL-197TD2-CD-T
D7	6-501-355-01	s	DIODE CL-197TD2-CD-T
D8	6-501-355-01	s	DIODE CL-197TD2-CD-T
D9	6-501-355-01	s	DIODE CL-197TD2-CD-T
D10	6-501-355-01	s	DIODE CL-197TD2-CD-T
D11	6-501-355-01	s	DIODE CL-197TD2-CD-T
D12	6-501-355-01	s	DIODE CL-197TD2-CD-T
D13	6-501-355-01	s	DIODE CL-197TD2-CD-T
D14	6-501-355-01	s	DIODE CL-197TD2-CD-T
D15	6-501-355-01	s	DIODE CL-197TD2-CD-T
D16	6-501-355-01	s	DIODE CL-197TD2-CD-T
D17	6-501-355-01	s	DIODE CL-197TD2-CD-T
D18	6-501-355-01	s	DIODE CL-197TD2-CD-T
D19	6-501-355-01	s	DIODE CL-197TD2-CD-T
D20	6-501-355-01	s	DIODE CL-197TD2-CD-T
D21	6-501-355-01	s	DIODE CL-197TD2-CD-T
D22	6-501-355-01	s	DIODE CL-197TD2-CD-T
D23	6-501-355-01	s	DIODE CL-197TD2-CD-T
D24	6-501-355-01	s	DIODE CL-197TD2-CD-T
D25	6-501-355-01	s	DIODE CL-197TD2-CD-T
D26	6-501-355-01	s	DIODE CL-197TD2-CD-T
D27	6-501-355-01	s	DIODE CL-197TD2-CD-T
D28	6-501-355-01	s	DIODE CL-197TD2-CD-T
D29	6-501-355-01	s	DIODE CL-197TD2-CD-T
D30	6-501-355-01	s	DIODE CL-197TD2-CD-T
D31	6-501-355-01	s	DIODE CL-197TD2-CD-T
D32	6-501-355-01	s	DIODE CL-197TD2-CD-T
D33	6-501-355-01	s	DIODE CL-197TD2-CD-T
D34	6-501-355-01	s	DIODE CL-197TD2-CD-T
D35	6-501-355-01	s	DIODE CL-197TD2-CD-T
D36	6-501-355-01	s	DIODE CL-197TD2-CD-T
D37	6-501-355-01	s	DIODE CL-197TD2-CD-T
D38	6-501-355-01	s	DIODE CL-197TD2-CD-T
D39	6-501-355-01	s	DIODE CL-197TD2-CD-T
D40	6-501-355-01	s	DIODE CL-197TD2-CD-T
D41	6-501-355-01	s	DIODE CL-197TD2-CD-T
D42	6-501-355-01	s	DIODE CL-197TD2-CD-T
D43	6-501-355-01	s	DIODE CL-197TD2-CD-T
D44	6-501-355-01	s	DIODE CL-197TD2-CD-T
D45	6-501-355-01	s	DIODE CL-197TD2-CD-T
D46	6-501-355-01	s	DIODE CL-197TD2-CD-T
D47	6-501-355-01	s	DIODE CL-197TD2-CD-T
D48	6-501-355-01	s	DIODE CL-197TD2-CD-T
D49	6-501-355-01	s	DIODE CL-197TD2-CD-T
D50	6-501-355-01	s	DIODE CL-197TD2-CD-T
D51	6-501-355-01	s	DIODE CL-197TD2-CD-T
D52	6-501-355-01	s	DIODE CL-197TD2-CD-T
D53	6-501-355-01	s	DIODE CL-197TD2-CD-T
D54	6-501-355-01	s	DIODE CL-197TD2-CD-T
D55	6-501-355-01	s	DIODE CL-197TD2-CD-T
D56	6-501-355-01	s	DIODE CL-197TD2-CD-T
D57	6-501-355-01	s	DIODE CL-197TD2-CD-T

(LE-309 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
D58	6-501-355-01	s	DIODE CL-197TD2-CD-T
D59	6-501-355-01	s	DIODE CL-197TD2-CD-T
D60	6-501-355-01	s	DIODE CL-197TD2-CD-T
D61	6-501-355-01	s	DIODE CL-197TD2-CD-T
D62	6-501-355-01	s	DIODE CL-197TD2-CD-T
D63	6-501-355-01	s	DIODE CL-197TD2-CD-T
D64	6-501-355-01	s	DIODE CL-197TD2-CD-T
D65	6-501-355-01	s	DIODE CL-197TD2-CD-T
D66	6-501-355-01	s	DIODE CL-197TD2-CD-T
D67	6-501-355-01	s	DIODE CL-197TD2-CD-T
D68	6-501-355-01	s	DIODE CL-197TD2-CD-T
D69	6-501-355-01	s	DIODE CL-197TD2-CD-T
D70	6-501-355-01	s	DIODE CL-197TD2-CD-T
D71	6-501-355-01	s	DIODE CL-197TD2-CD-T
D72	6-501-355-01	s	DIODE CL-197TD2-CD-T
D73	6-501-355-01	s	DIODE CL-197TD2-CD-T
D74	6-501-355-01	s	DIODE CL-197TD2-CD-T
D75	6-501-355-01	s	DIODE CL-197TD2-CD-T
D76	6-501-355-01	s	DIODE CL-197TD2-CD-T
D77	6-501-355-01	s	DIODE CL-197TD2-CD-T
D78	6-501-355-01	s	DIODE CL-197TD2-CD-T
D79	6-501-355-01	s	DIODE CL-197TD2-CD-T
D80	6-501-355-01	s	DIODE CL-197TD2-CD-T
D81	6-501-355-01	s	DIODE CL-197TD2-CD-T
D82	6-501-355-01	s	DIODE CL-197TD2-CD-T
D83	6-501-355-01	s	DIODE CL-197TD2-CD-T
D84	6-501-355-01	s	DIODE CL-197TD2-CD-T
D85	6-501-355-01	s	DIODE CL-197TD2-CD-T
D86	6-501-355-01	s	DIODE CL-197TD2-CD-T
D87	6-501-355-01	s	DIODE CL-197TD2-CD-T
D88	6-501-355-01	s	DIODE CL-197TD2-CD-T
D89	6-501-355-01	s	DIODE CL-197TD2-CD-T
D90	6-501-355-01	s	DIODE CL-197TD2-CD-T
D91	6-501-355-01	s	DIODE CL-197TD2-CD-T
D92	6-501-355-01	s	DIODE CL-197TD2-CD-T
D93	6-501-355-01	s	DIODE CL-197TD2-CD-T
D94	6-501-355-01	s	DIODE CL-197TD2-CD-T
D95	6-501-355-01	s	DIODE CL-197TD2-CD-T
D96	6-501-355-01	s	DIODE CL-197TD2-CD-T
D97	6-501-355-01	s	DIODE CL-197TD2-CD-T
D98	6-501-355-01	s	DIODE CL-197TD2-CD-T
D99	6-501-355-01	s	DIODE CL-197TD2-CD-T
D100	6-501-355-01	s	DIODE CL-197TD2-CD-T
D101	6-501-355-01	s	DIODE CL-197TD2-CD-T
D102	6-501-355-01	s	DIODE CL-197TD2-CD-T
D103	6-501-355-01	s	DIODE CL-197TD2-CD-T
D104	6-501-355-01	s	DIODE CL-197TD2-CD-T
D105	6-501-355-01	s	DIODE CL-197TD2-CD-T
D106	6-501-355-01	s	DIODE CL-197TD2-CD-T
D107	6-501-355-01	s	DIODE CL-197TD2-CD-T
D108	6-501-355-01	s	DIODE CL-197TD2-CD-T
D109	6-501-355-01	s	DIODE CL-197TD2-CD-T
D110	6-501-355-01	s	DIODE CL-197TD2-CD-T
D111	6-501-355-01	s	DIODE CL-197TD2-CD-T
D112	6-501-355-01	s	DIODE CL-197TD2-CD-T
D113	6-501-355-01	s	DIODE CL-197TD2-CD-T
D114	6-501-355-01	s	DIODE CL-197TD2-CD-T
D115	6-501-355-01	s	DIODE CL-197TD2-CD-T
D116	6-501-355-01	s	DIODE CL-197TD2-CD-T

(LE-309 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
D117	6-501-355-01	s	DIODE CL-197TD2-CD-T
D118	6-501-355-01	s	DIODE CL-197TD2-CD-T
D119	6-501-355-01	s	DIODE CL-197TD2-CD-T
D120	6-501-355-01	s	DIODE CL-197TD2-CD-T
D121	6-501-355-01	s	DIODE CL-197TD2-CD-T
D122	6-501-355-01	s	DIODE CL-197TD2-CD-T
D123	6-501-355-01	s	DIODE CL-197TD2-CD-T
D124	6-501-355-01	s	DIODE CL-197TD2-CD-T
D125	6-501-355-01	s	DIODE CL-197TD2-CD-T
D126	6-501-355-01	s	DIODE CL-197TD2-CD-T
D127	6-501-355-01	s	DIODE CL-197TD2-CD-T
D128	6-501-355-01	s	DIODE CL-197TD2-CD-T
D129	6-501-355-01	s	DIODE CL-197TD2-CD-T
D130	6-501-355-01	s	DIODE CL-197TD2-CD-T
D131	6-501-355-01	s	DIODE CL-197TD2-CD-T
D132	6-501-355-01	s	DIODE CL-197TD2-CD-T
D133	6-501-355-01	s	DIODE CL-197TD2-CD-T
D134	6-501-355-01	s	DIODE CL-197TD2-CD-T
D135	6-501-355-01	s	DIODE CL-197TD2-CD-T
D136	6-501-355-01	s	DIODE CL-197TD2-CD-T
D137	6-501-355-01	s	DIODE CL-197TD2-CD-T
D138	6-501-355-01	s	DIODE CL-197TD2-CD-T
D139	6-501-355-01	s	DIODE CL-197TD2-CD-T
D140	6-501-355-01	s	DIODE CL-197TD2-CD-T
D141	6-501-355-01	s	DIODE CL-197TD2-CD-T
D142	6-501-355-01	s	DIODE CL-197TD2-CD-T
D143	6-501-355-01	s	DIODE CL-197TD2-CD-T
D144	6-501-355-01	s	DIODE CL-197TD2-CD-T
D145	6-501-355-01	s	DIODE CL-197TD2-CD-T
D146	6-501-355-01	s	DIODE CL-197TD2-CD-T
D147	6-501-355-01	s	DIODE CL-197TD2-CD-T
D148	6-501-355-01	s	DIODE CL-197TD2-CD-T
D149	6-501-355-01	s	DIODE CL-197TD2-CD-T
D150	6-501-355-01	s	DIODE CL-197TD2-CD-T
D151	6-501-355-01	s	DIODE CL-197TD2-CD-T
D152	6-501-355-01	s	DIODE CL-197TD2-CD-T
D153	6-501-355-01	s	DIODE CL-197TD2-CD-T
D154	6-501-355-01	s	DIODE CL-197TD2-CD-T
D155	6-501-355-01	s	DIODE CL-197TD2-CD-T
D156	6-501-355-01	s	DIODE CL-197TD2-CD-T
D157	6-501-355-01	s	DIODE CL-197TD2-CD-T
D158	6-501-355-01	s	DIODE CL-197TD2-CD-T
D159	6-501-355-01	s	DIODE CL-197TD2-CD-T
D160	6-501-355-01	s	DIODE CL-197TD2-CD-T
D161	6-501-355-01	s	DIODE CL-197TD2-CD-T
D162	6-501-355-01	s	DIODE CL-197TD2-CD-T
D163	6-501-355-01	s	DIODE CL-197TD2-CD-T
D164	6-501-355-01	s	DIODE CL-197TD2-CD-T
D165	6-501-355-01	s	DIODE CL-197TD2-CD-T
D166	6-501-355-01	s	DIODE CL-197TD2-CD-T
D167	6-501-355-01	s	DIODE CL-197TD2-CD-T
D168	6-501-355-01	s	DIODE CL-197TD2-CD-T
D169	6-501-355-01	s	DIODE CL-197TD2-CD-T
D170	6-501-355-01	s	DIODE CL-197TD2-CD-T
D171	6-501-355-01	s	DIODE CL-197TD2-CD-T
D172	6-501-355-01	s	DIODE CL-197TD2-CD-T
D173	6-501-355-01	s	DIODE CL-197TD2-CD-T
D174	6-501-355-01	s	DIODE CL-197TD2-CD-T
D175	6-501-355-01	s	DIODE CL-197TD2-CD-T

(LE-309 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
D176	6-501-355-01	s	DIODE CL-197TD2-CD-T
D177	6-501-355-01	s	DIODE CL-197TD2-CD-T
D178	6-501-355-01	s	DIODE CL-197TD2-CD-T
D179	6-501-355-01	s	DIODE CL-197TD2-CD-T
D180	6-501-355-01	s	DIODE CL-197TD2-CD-T
D181	6-501-355-01	s	DIODE CL-197TD2-CD-T
D182	6-501-355-01	s	DIODE CL-197TD2-CD-T
D183	6-501-355-01	s	DIODE CL-197TD2-CD-T
D184	6-501-355-01	s	DIODE CL-197TD2-CD-T
D185	6-501-355-01	s	DIODE CL-197TD2-CD-T
D186	6-501-355-01	s	DIODE CL-197TD2-CD-T
D187	6-501-355-01	s	DIODE CL-197TD2-CD-T
D188	6-501-355-01	s	DIODE CL-197TD2-CD-T
D189	6-501-355-01	s	DIODE CL-197TD2-CD-T
D190	6-501-355-01	s	DIODE CL-197TD2-CD-T
D191	6-501-355-01	s	DIODE CL-197TD2-CD-T
D192	6-501-355-01	s	DIODE CL-197TD2-CD-T
D193	6-501-355-01	s	DIODE CL-197TD2-CD-T
D194	6-501-355-01	s	DIODE CL-197TD2-CD-T
D195	6-501-355-01	s	DIODE CL-197TD2-CD-T
D196	6-501-355-01	s	DIODE CL-197TD2-CD-T
D197	6-501-355-01	s	DIODE CL-197TD2-CD-T
D198	6-501-355-01	s	DIODE CL-197TD2-CD-T
D199	6-501-355-01	s	DIODE CL-197TD2-CD-T
D200	6-501-355-01	s	DIODE CL-197TD2-CD-T
D201	6-501-355-01	s	DIODE CL-197TD2-CD-T
D202	6-501-355-01	s	DIODE CL-197TD2-CD-T
D203	6-501-355-01	s	DIODE CL-197TD2-CD-T
D204	6-501-355-01	s	DIODE CL-197TD2-CD-T
D205	6-501-355-01	s	DIODE CL-197TD2-CD-T
D206	6-501-355-01	s	DIODE CL-197TD2-CD-T
D207	6-501-355-01	s	DIODE CL-197TD2-CD-T
D208	6-501-355-01	s	DIODE CL-197TD2-CD-T
D209	6-501-355-01	s	DIODE CL-197TD2-CD-T
D210	6-501-355-01	s	DIODE CL-197TD2-CD-T
D211	6-501-355-01	s	DIODE CL-197TD2-CD-T
D212	6-501-355-01	s	DIODE CL-197TD2-CD-T
D213	6-501-355-01	s	DIODE CL-197TD2-CD-T
D214	6-501-355-01	s	DIODE CL-197TD2-CD-T
D215	6-501-355-01	s	DIODE CL-197TD2-CD-T
D216	6-501-355-01	s	DIODE CL-197TD2-CD-T
D217	6-501-355-01	s	DIODE CL-197TD2-CD-T
D218	6-501-355-01	s	DIODE CL-197TD2-CD-T
D219	6-501-355-01	s	DIODE CL-197TD2-CD-T
D220	6-501-355-01	s	DIODE CL-197TD2-CD-T
D221	6-501-355-01	s	DIODE CL-197TD2-CD-T
D222	6-501-355-01	s	DIODE CL-197TD2-CD-T
D223	6-501-355-01	s	DIODE CL-197TD2-CD-T
D224	6-501-355-01	s	DIODE CL-197TD2-CD-T
D225	6-501-355-01	s	DIODE CL-197TD2-CD-T
D226	6-501-355-01	s	DIODE CL-197TD2-CD-T
D227	6-501-355-01	s	DIODE CL-197TD2-CD-T
D228	6-501-355-01	s	DIODE CL-197TD2-CD-T
D229	6-501-355-01	s	DIODE CL-197TD2-CD-T
D230	6-501-355-01	s	DIODE CL-197TD2-CD-T
D231	6-501-355-01	s	DIODE CL-197TD2-CD-T
D232	6-501-355-01	s	DIODE CL-197TD2-CD-T
D233	6-501-355-01	s	DIODE CL-197TD2-CD-T
D234	6-501-355-01	s	DIODE CL-197TD2-CD-T

(LE-309 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
D235	6-501-355-01	s	DIODE CL-197TD2-CD-T
D236	6-501-355-01	s	DIODE CL-197TD2-CD-T
D237	6-501-355-01	s	DIODE CL-197TD2-CD-T
D238	6-501-355-01	s	DIODE CL-197TD2-CD-T
D239	6-501-355-01	s	DIODE CL-197TD2-CD-T
D240	6-501-355-01	s	DIODE CL-197TD2-CD-T
D241	6-501-355-01	s	DIODE CL-197TD2-CD-T
D242	6-501-355-01	s	DIODE CL-197TD2-CD-T
D243	6-501-355-01	s	DIODE CL-197TD2-CD-T
D244	6-501-355-01	s	DIODE CL-197TD2-CD-T
D245	6-501-355-01	s	DIODE CL-197TD2-CD-T
D246	6-501-355-01	s	DIODE CL-197TD2-CD-T
D247	6-501-355-01	s	DIODE CL-197TD2-CD-T
D248	6-501-355-01	s	DIODE CL-197TD2-CD-T
D249	6-501-355-01	s	DIODE CL-197TD2-CD-T
D250	6-501-355-01	s	DIODE CL-197TD2-CD-T
D251	6-501-355-01	s	DIODE CL-197TD2-CD-T
D252	6-501-355-01	s	DIODE CL-197TD2-CD-T
D253	6-501-355-01	s	DIODE CL-197TD2-CD-T
D254	6-501-355-01	s	DIODE CL-197TD2-CD-T
D255	6-501-355-01	s	DIODE CL-197TD2-CD-T
D256	6-501-355-01	s	DIODE CL-197TD2-CD-T

MB-1059 BOARD
---

*1: [Board No. suffix 14]
*2: [Board No. suffix 15-]

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1159-988-A	s	MOUNTED CIRCUIT BOARD,MB-1059G (GOLD)
	A-1101-928-A	s	MOUNTED CIRCUIT BOARD, MB-1059 (SILVER)
18pcs	3-729-061-01	s	SCREW (M2X4.5) (TYPE 1)(STEEL)
C1	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C2	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C3	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C5	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C6	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C7	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C8	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C9	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C10	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C11	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C12	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C13	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C14	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C15	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C16	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C17	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C18	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C19	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C20	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C21	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C22	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C23	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C24	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C25	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C26	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C27	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C28	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C29	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C30	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C31	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C32	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C33	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C34	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C35	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C36 *2	1-100-567-81	s	CERAMIC CHIP 10000PF 10% 25V
CN1	1-817-325-21	s	PIN, CONNECTOR 20P
CN3	1-816-113-21	s	CONNECTOR 15P
CN4	1-691-550-11	s	PIN,CONNECTOR (3P)(SMD)(1.5MM)
CN5	1-695-479-11	o	PIN, CONNECTOR (PC BOARD) 2P
CN6	1-778-965-21	s	PIN, CONNECTOR (PC BOARD) 12P
CN7	1-817-318-21	s	PIN, CONNECTOR 6P
CN11	1-794-142-31	s	CONNECTOR, FFC/FPC(ZIF) AN 36P (GOLD)
	1-794-142-11	o	CONNECTOR, FFC (ZIF) 36P (SILVER)
CN12	1-779-522-31	s	CONNECTOR, FFC/FPC(ZIF) AN 40P (GOLD)
CN13	1-794-142-31	s	CONNECTOR, FFC/FPC(ZIF) AN 36P (GOLD)
	1-794-142-11	o	CONNECTOR, FFC (ZIF) 36P (SILVER)
CN14	1-815-875-21	s	PIN, CONNECTOR (PC BOARD)(12P)

(MB-1059 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
CN15	1-764-081-21	s	PIN, CONNECTOR (PC BOARD) 9P
CN16	1-770-469-21	o	PIN, CONNECTOR (PC BOARD) 2P
CN17	1-819-577-21	s	PIN, CONNECTOR (PC BOARD) 15P
CN18	1-691-550-11	s	PIN,CONNECTOR (3P)(SMD)(1.5MM)
CN19 *1	1-764-079-21	s	PIN, CONNECTOR (PC BOARD) 4P
CN20 *2	1-580-789-21	o	PIN, CONNECTOR (SMD) 6P
L1	1-416-344-11	s	COIL, CHOKE 10UH
L2	1-416-948-21	s	COIL, CHOKE (SMD)
L3	1-414-398-11	s	INDUCTOR (SMD) 10UH
L4	1-414-398-11	s	INDUCTOR (SMD) 10UH
L5	1-414-398-11	s	INDUCTOR (SMD) 10UH
L6	1-416-344-11	s	COIL, CHOKE 10UH
L7	1-416-344-11	s	COIL, CHOKE 10UH
L8	1-416-344-11	s	COIL, CHOKE 10UH
L9	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L10	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L11	1-416-344-11	s	COIL, CHOKE 10UH
L12	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L13	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L14	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L15	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L16	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L17	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L18	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L19	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L20	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L21	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L22	1-416-344-11	s	COIL, CHOKE 10UH
L23	1-416-948-21	s	COIL, CHOKE (SMD)
L24	1-416-948-21	s	COIL, CHOKE (SMD)
L25	1-416-948-21	s	COIL, CHOKE (SMD)
L26	1-416-344-11	s	COIL, CHOKE 10UH
L27	1-416-344-11	s	COIL, CHOKE 10UH
L28	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L29	1-416-344-11	s	COIL, CHOKE 10UH
L30	1-414-398-11	s	INDUCTOR (SMD) 10UH
L31	1-414-398-11	s	INDUCTOR (SMD) 10UH
THP1	1-803-615-11	s	THERMISTOR, POSITIVE
THP2	1-803-615-11	s	THERMISTOR, POSITIVE
THP3	1-803-615-11	s	THERMISTOR, POSITIVE
THP5	1-803-615-11	s	THERMISTOR, POSITIVE
THP6 *1	1-803-615-21	s	THERMISTOR, POSITIVE
THP7	1-804-987-21	s	THERMISTOR, POSITIVE
THP8	1-803-615-11	s	THERMISTOR, POSITIVE
THP9	1-803-615-11	s	THERMISTOR, POSITIVE
THP11	1-803-615-11	s	THERMISTOR, POSITIVE
THP12	1-803-615-11	s	THERMISTOR, POSITIVE
THP13	1-803-615-11	s	THERMISTOR, POSITIVE
THP14	1-804-987-21	s	THERMISTOR, POSITIVE
THP15	1-804-987-21	s	THERMISTOR, POSITIVE
THP16	1-804-987-21	s	THERMISTOR, POSITIVE
THP17	1-804-987-21	s	THERMISTOR, POSITIVE

MB-1060 BOARD
---

*1: [Board No. suffix 12]
*2: [Board No. suffix 21-]

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1166-187-A	s	MOUNTED CIRCUIT BOARD,MB-1060G (GOLD)
	A-1124-080-A	s	MOUNTED CIRCUIT BOARD, MB-1060 (SILVER)
15pcs	3-729-061-01	s	SCREW (M2X4.5) (TYPE 1)(STEEL)
C1	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C2	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C3	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C4	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C5	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C6	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C7	1-107-420-11	s	CAPACITOR,ELECT 47MF/35V(105C)
C8	1-107-420-11	s	CAPACITOR,ELECT 47MF/35V(105C)
C9	1-107-420-11	s	CAPACITOR,ELECT 47MF/35V(105C)
C10	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
CN1	1-695-480-21	o	PIN, CONNECTOR (PC BOARD) 2P
CN2	1-691-550-11	s	PIN,CONNECTOR (3P)(SMD)(1.5MM)
CN3	1-784-254-11	s	CONNECTOR 10P
CN4	1-778-552-11	o	PIN, CONNECTOR 30P
CN5 *1	1-784-254-21	s	CONNECTOR 10P
*2	1-778-965-21	s	CONNECTOR 12P
CN6	1-778-650-11	o	CONNECTOR, FFC (ZIF) 30P (SILVER)
CN7	1-764-087-21	s	PIN, CONNECTOR (PC BOARD) 14P
CN9	1-779-806-21	s	CONNECTOR, 1.0MM PITCH 8P
CN10	1-816-587-11	s	PIN, CONNECTOR (PC BOARD) 15P
CN11	1-817-325-21	s	PIN, CONNECTOR 20P
CN13	1-580-541-11	s	PIN, CONNECTOR (PC BOARD) 24P
CN14	1-815-954-21	s	PIN, CONNECTOR (PC BOARD) 13P
CN15	1-816-113-21	s	CONNECTOR 15P
CN16	1-784-254-11	s	CONNECTOR 10P
CN17	1-580-544-11	s	PIN, CONNECTOR (PC BOARD) 30P
CN27	1-778-552-11	o	PIN, CONNECTOR 30P
CN28	1-764-243-11	o	CONNECTOR (COAXIAL)
CN29	1-764-243-11	o	CONNECTOR (COAXIAL)
CN112 *2	1-764-078-21	s	PIN, CONNECTOR (PC BOARD) 3P
D1	8-719-801-78	s	DIODE 1SS184
D2	8-719-801-78	s	DIODE 1SS184
D3	8-719-801-78	s	DIODE 1SS184
D4	8-719-801-78	s	DIODE 1SS184
D5	8-719-801-78	s	DIODE 1SS184
D6	8-719-801-78	s	DIODE 1SS184
D7 *2	8-719-046-86	s	DIODE F1J6TP
FB1	1-414-772-11	s	INDUCTOR,MICRO(CHIP TYPE) 2012
FB2	1-414-772-11	s	INDUCTOR,MICRO(CHIP TYPE) 2012
FB3	1-414-772-11	s	INDUCTOR,MICRO(CHIP TYPE) 2012
FB4	1-469-094-21	s	FERRITE, EMI (SMD)
FB5	1-469-094-21	s	FERRITE, EMI (SMD)
FB6	1-469-094-21	s	FERRITE, EMI (SMD)
FB7	1-469-094-21	s	FERRITE, EMI (SMD)
FB8	1-469-094-21	s	FERRITE, EMI (SMD)
FB9	1-469-094-21	s	FERRITE, EMI (SMD)
FB10	1-469-094-21	s	FERRITE, EMI (SMD)
FB11	1-469-094-21	s	FERRITE, EMI (SMD)
FB12	1-469-094-21	s	FERRITE, EMI (SMD)
FB13	1-469-108-11	s	FERRITE, EMI (SMD)

Ref. No. or Q'ty	Part No.	SP	Description
FB14	1-469-108-11	s	FERRITE, EMI (SMD)
FB15	1-469-108-11	s	FERRITE, EMI (SMD)
FB16	1-414-772-11	s	INDUCTOR,MICRO(CHIP TYPE) 2012
FB17	1-414-772-11	s	INDUCTOR,MICRO(CHIP TYPE) 2012
FB18	1-414-772-11	s	INDUCTOR,MICRO(CHIP TYPE) 2012
FB19	1-414-772-11	s	INDUCTOR,MICRO(CHIP TYPE) 2012
FB20	1-414-772-11	s	INDUCTOR,MICRO(CHIP TYPE) 2012
FB21	1-414-772-11	s	INDUCTOR,MICRO(CHIP TYPE) 2012
FB22	1-469-094-21	s	FERRITE, EMI (SMD)
FB23	1-469-094-21	s	FERRITE, EMI (SMD)
FB24	1-469-094-21	s	FERRITE, EMI (SMD)
FB25	1-469-094-21	s	FERRITE, EMI (SMD)
FB26	1-469-094-21	s	FERRITE, EMI (SMD)
FB27	1-469-108-11	s	FERRITE, EMI (SMD)
FL1	1-234-851-11	s	FILTER, EMI REMOVAL
FL2	1-234-851-11	s	FILTER, EMI REMOVAL
FL3	1-239-896-12	s	FILTER, EMI (SMD)
FL4	1-239-896-12	s	FILTER, EMI (SMD)
FL5	1-234-851-11	s	FILTER, EMI REMOVAL
FL6	1-234-851-11	s	FILTER, EMI REMOVAL
FL7	1-239-896-12	s	FILTER, EMI (SMD)
FL8	1-239-896-12	s	FILTER, EMI (SMD)
FL9	1-239-896-12	s	FILTER, EMI (SMD)
FL10	1-239-896-12	s	FILTER, EMI (SMD)
FL11	1-239-896-12	s	FILTER, EMI (SMD)
FL12	1-239-896-12	s	FILTER, EMI (SMD)
FL13	1-239-896-12	s	FILTER, EMI (SMD)
FL14	1-239-896-12	s	FILTER, EMI (SMD)
FL15	1-234-851-11	s	FILTER, EMI REMOVAL
FL16	1-234-851-11	s	FILTER, EMI REMOVAL
FL17	1-239-896-12	s	FILTER, EMI (SMD)
FL18	1-239-896-12	s	FILTER, EMI (SMD)
FL19	1-239-896-12	s	FILTER, EMI (SMD)
FL20	1-239-896-12	s	FILTER, EMI (SMD)
FL21	1-239-896-12	s	FILTER, EMI (SMD)
FL22	1-239-896-12	s	FILTER, EMI (SMD)
FL23	1-239-896-12	s	FILTER, EMI (SMD)
FL24	1-239-896-12	s	FILTER, EMI (SMD)
FL25	1-239-896-12	s	FILTER, EMI (SMD)
FL26	1-239-896-12	s	FILTER, EMI (SMD)
FL27	1-239-896-12	s	FILTER, EMI (SMD)
FL28	1-239-896-12	s	FILTER, EMI (SMD)
FL29	1-239-896-12	s	FILTER, EMI (SMD)
FL30	1-239-896-12	s	FILTER, EMI (SMD)
FL31	1-239-896-12	s	FILTER, EMI (SMD)
FL32	1-239-896-12	s	FILTER, EMI (SMD)
FL33	1-239-896-12	s	FILTER, EMI (SMD)
IC2	6-702-481-01	s	IC PCA9555DB-118
IC3	6-702-481-01	s	IC PCA9555DB-118
IC4	6-702-481-01	s	IC PCA9555DB-118
L1	1-414-398-11	s	INDUCTOR (SMD) 10UH
L2	1-414-398-11	s	INDUCTOR (SMD) 10UH
L3	1-416-344-11	s	COIL, CHOKE 10UH
L4	1-416-344-11	s	COIL, CHOKE 10UH
L5	1-416-344-11	s	COIL, CHOKE 10UH
L6	1-416-948-21	s	COIL, CHOKE (SMD)
L7	1-416-948-21	s	COIL, CHOKE (SMD)
L8	1-414-392-31	s	INDUCTOR (SMD) 1.0UH

(MB-1060 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
L9	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L10	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L11	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L12	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L13	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L14	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L15	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L16	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L17	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L18	1-416-344-11	s	COIL, CHOKE 10UH
L19	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L20	1-416-344-11	s	COIL, CHOKE 10UH
Q1	8-729-928-81	s	TRANSISTOR DTC144EE
Q2	8-729-928-81	s	TRANSISTOR DTC144EE
Q3	8-729-928-81	s	TRANSISTOR DTC144EE
Q4	8-729-928-81	s	TRANSISTOR DTC144EE
R1	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R2	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R3	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R4	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R5	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R6	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R7	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R8	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R9	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R12	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R13	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R14	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
RB1	1-234-380-11	s	RESISTOR,NETWORK 47KX4 (1005)
RB2	1-234-380-11	s	RESISTOR,NETWORK 47KX4 (1005)
RB3	1-234-380-11	s	RESISTOR,NETWORK 47KX4 (1005)
RB4	1-234-380-11	s	RESISTOR,NETWORK 47KX4 (1005)
RB5	1-234-380-11	s	RESISTOR,NETWORK 47KX4 (1005)
RB6	1-234-380-11	s	RESISTOR,NETWORK 47KX4 (1005)
RB7	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB8	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB9	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB10	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB11	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB12	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB13	1-234-380-11	s	RESISTOR,NETWORK 47KX4 (1005)
RB14	1-234-380-11	s	RESISTOR,NETWORK 47KX4 (1005)
RB15	1-234-380-11	s	RESISTOR,NETWORK 47KX4 (1005)
RB16	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB17	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB18	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB19	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB20	1-234-380-11	s	RESISTOR,NETWORK 47KX4 (1005)
THP1	1-803-615-11	s	THERMISTOR, POSITIVE
THP2	1-803-615-11	s	THERMISTOR, POSITIVE
THP3	1-803-615-11	s	THERMISTOR, POSITIVE

MX-109 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1142-714-A	s	MOUNTED CIRCUIT BOARD, MX-109
1pc	1-234-981-11	s	FILTER,MPX
C1	1-165-908-91	s	CAP, CERAMIC 1000000PF B 1608
C2	1-165-908-91	s	CAP, CERAMIC 1000000PF B 1608
C3	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C4	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C5	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C6	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C7	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C8	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C9	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C10	1-126-391-21	s	CAP, CHIP ELECT 47MF (5X5.7)
C11	1-165-908-91	s	CAP, CERAMIC 1000000PF B 1608
C12	1-165-908-91	s	CAP, CERAMIC 1000000PF B 1608
C13	1-165-908-91	s	CAP, CERAMIC 1000000PF B 1608
C14	1-165-872-21	s	CAP, ELECT 47MF (5.0X6.5)
C15	1-165-872-21	s	CAP, ELECT 47MF (5.0X6.5)
C16	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C101	1-164-844-81	s	CAP, CHIP CERAMIC 4PF CH 1005
C103	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3225
C104	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3225
C105	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C106	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C107	1-164-842-81	s	CAP,CHIP CERAMIC 2.0PF CK 1005
C108	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C109	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C110	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C111	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3225
C112	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C113	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C114	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C115	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C116	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C117	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C118	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C119	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C120	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C121	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C122	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C123	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C124	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C125	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C126	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C127	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C128	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C129	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C130	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C131	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C132	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C133	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C134	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C135	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C136	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C137	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C138	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C139	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C140	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(MX-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C141	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C142	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C143	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C144	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C145	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C146	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C147	1-164-847-81	s	CAP, CHIP CERAMIC 7PF CH 1005
C148	1-164-842-81	s	CAP,CHIP CERAMIC 2.0PF CK 1005
C149	1-164-847-81	s	CAP, CHIP CERAMIC 7PF CH 1005
C201	1-126-391-21	s	CAP, CHIP ELECT 47MF (5X5.7)
C202	1-126-391-21	s	CAP, CHIP ELECT 47MF (5X5.7)
C203	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C204	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C205	1-164-840-81	s	CAP, CHIP CERAMIC 1PF CK 1005
C206	1-164-840-81	s	CAP, CHIP CERAMIC 1PF CK 1005
C208	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C209	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C210	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C211	1-165-908-91	s	CAP, CERAMIC 1000000PF B 1608
C212	1-165-908-91	s	CAP, CERAMIC 1000000PF B 1608
C213	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C214	1-165-908-91	s	CAP, CERAMIC 1000000PF B 1608
C215	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C216	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C217	1-165-908-91	s	CAP, CERAMIC 1000000PF B 1608
C218	1-165-908-91	s	CAP, CERAMIC 1000000PF B 1608
C219	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C221	1-128-414-21	s	CAP, CHIP ELECT 220MF
C222	1-128-414-21	s	CAP, CHIP ELECT 220MF
C223	1-164-842-81	s	CAP,CHIP CERAMIC 2.0PF CK 1005
C224	1-164-847-81	s	CAP, CHIP CERAMIC 7PF CH 1005
C225	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C226	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C227	1-127-950-21	s	CAP, CHIP FILM 0.01MF (2012)
C228	1-164-842-81	s	CAP,CHIP CERAMIC 2.0PF CK 1005
C229	1-164-847-81	s	CAP, CHIP CERAMIC 7PF CH 1005
C230	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C231	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C232	1-126-391-21	s	CAP, CHIP ELECT 47MF (5X5.7)
C233	1-126-391-21	s	CAP, CHIP ELECT 47MF (5X5.7)
C234	1-115-153-21	s	CAP, ELECT 4.7MF
C235	1-117-144-21	s	CAP, ELECT 0.47MF
C236	1-127-954-21	s	CAP, CHIP FILM 0.047MF (3216)
C237	1-165-908-91	s	CAP, CERAMIC 1000000PF B 1608
C238	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C239	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C240	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C250	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C251	1-126-391-21	s	CAP, CHIP ELECT 47MF (5X5.7)
C252	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C253	1-164-933-81	s	CAP, CHIP CERAMIC 220PF B 1005
C254	1-164-933-81	s	CAP, CHIP CERAMIC 220PF B 1005
C255	1-164-933-81	s	CAP, CHIP CERAMIC 220PF B 1005
C256	1-165-908-91	s	CAP, CERAMIC 1000000PF B 1608
C258	1-164-870-81	s	CAP, CHIP CERAMIC 68PF CH 1005
C259	1-164-870-81	s	CAP, CHIP CERAMIC 68PF CH 1005
C260	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C261	1-165-908-91	s	CAP, CERAMIC 1000000PF B 1608

(MX-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
CN1	1-695-930-51	s	CONNECTOR, FPC 16P
CN2	1-766-703-21	s	CONNECTOR, COAXIAL
CN3	1-766-703-21	s	CONNECTOR, COAXIAL
D1	8-719-017-03	s	DIODE 02DZ4.7-TPH3
D2	8-719-017-03	s	DIODE 02DZ4.7-TPH3
D101	8-719-989-01	s	DIODE DA221-TL
D201	8-719-083-90	s	DIODE HVU363ATRU
D202	8-719-083-90	s	DIODE HVU363ATRU
E1	1-535-877-22	s	CHIP, CHECKER
E2	1-535-877-22	s	CHIP, CHECKER
E3	1-535-877-22	s	CHIP, CHECKER
E4	1-535-877-22	s	CHIP, CHECKER
FL101	1-234-987-11	s	FILTER, BAND PASS
FL201	1-233-892-21	s	FILTER, LOW PASS
IC1	8-759-327-01	s	IC NJM062V(TE2)
IC2	8-759-338-95	s	IC NJM2903V(TE2)
IC3	8-759-185-42	s	IC LM4040AIM3-2.5
IC201	8-752-099-49	s	IC CXA3556N-T4
IC202	6-706-863-01	s	IC LMH6732MFX/NOPB
IC203	8-752-068-20	s	IC CXA1521M-TH
IC204	6-706-863-01	s	IC LMH6732MFX/NOPB
IC205	8-759-669-66	s	IC TLC272CPWR-12
IC250	8-759-344-12	s	IC GS4981CTAE3
IC251	8-759-472-35	s	IC 74VHC221AMTCX
IC252	8-759-421-87	s	IC UPC319G2-E2
L1	1-416-510-21	s	COIL, CHOKE 100UH
L2	1-416-510-21	s	COIL, CHOKE 100UH
L101	1-412-975-41	s	INDUCTOR, SMALL TYPE 0.47UH
L102	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L103	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L104	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L105	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L106	1-412-935-21	s	INDUCTOR 0.47UH (2520)
L201	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L202	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L203	1-412-937-21	s	INDUCTOR 0.68UH (2520)
L204	1-412-935-21	s	INDUCTOR 0.47UH (2520)
L205	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L206	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L250	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L251	1-414-404-41	s	INDUCTOR (SMD) 100.0UH
L252	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
LV101	1-409-817-21	s	COIL, VARIABLE
LV201	1-409-820-21	s	COIL, VARIABLE
Q1	8-729-209-73	s	TRANSISTOR 2SA1213Y-TE12L
Q2	8-729-209-77	s	TRANSISTOR 2SC2873Y-TE12L
Q101	8-729-026-84	s	TRANSISTOR 2SC4215Y-TE85L
Q102	8-729-023-48	s	TRANSISTOR 2SC4227(R35)-T1
Q103	8-729-024-59	s	TRANSISTOR 2SA1688-5-TL-E
Q104	8-729-026-33	s	TRANSISTOR XP6534-TX
Q105	8-729-026-84	s	TRANSISTOR 2SC4215Y-TE85L
Q106	8-729-026-33	s	TRANSISTOR XP6534-TX
Q107	8-729-026-33	s	TRANSISTOR XP6534-TX
Q108	8-729-026-84	s	TRANSISTOR 2SC4215Y-TE85L
Q109	8-729-026-33	s	TRANSISTOR XP6534-TX
Q110	8-729-026-33	s	TRANSISTOR XP6534-TX

(MX-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
Q111	8-729-026-84	s	TRANSISTOR 2SC4215Y-TE85L
Q112	8-729-026-33	s	TRANSISTOR XP6534-TX
Q113	8-729-026-33	s	TRANSISTOR XP6534-TX
Q114	8-729-026-84	s	TRANSISTOR 2SC4215Y-TE85L
Q115	8-729-026-33	s	TRANSISTOR XP6534-TX
Q201	8-729-026-33	s	TRANSISTOR XP6534-TX
Q202	8-729-026-84	s	TRANSISTOR 2SC4215Y-TE85L
Q203	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q204	6-550-361-01	s	TRANSISTOR 2SK2539-6/7/8-TB-E
Q205	6-550-361-01	s	TRANSISTOR 2SK2539-6/7/8-TB-E
Q250	8-729-140-86	s	TRANSISTOR 2SA1610-T1Y34
Q251	8-729-140-86	s	TRANSISTOR 2SA1610-T1Y34
R1	1-208-871-81	s	RES, CHIP 220 (1005)
R2	1-208-871-81	s	RES, CHIP 220 (1005)
R3	1-208-923-81	s	RES, CHIP 33K (1005)
R4	1-208-923-81	s	RES, CHIP 33K (1005)
R5	1-208-927-81	s	RES, CHIP 47K (1005)
R6	1-208-895-81	s	RES, CHIP 2.2K (1005)
R7	1-208-931-81	s	RES, CHIP 68K (1005)
R8	1-208-931-81	s	RES, CHIP 68K (1005)
R9	1-208-911-81	s	RES, CHIP 10K (1005)
R10	1-208-923-81	s	RES, CHIP 33K (1005)
R11	1-208-931-81	s	RES, CHIP 68K (1005)
R12	1-208-919-81	s	RES, CHIP 22K (1005)
R13	1-208-923-81	s	RES, CHIP 33K (1005)
R14	1-218-981-81	s	RES, CHIP 220K
R15	1-218-981-81	s	RES, CHIP 220K
R101	1-208-903-81	s	RES, CHIP 4.7K (1005)
R102	1-208-907-81	s	RES, CHIP 6.8K (1005)
R103	1-208-891-81	s	RES, CHIP 1.5K (1005)
R104	1-208-867-81	s	RES, CHIP 150 (1005)
R105	1-208-867-81	s	RES, CHIP 150 (1005)
R106	1-208-883-81	s	RES, CHIP 680 (1005)
R107	1-208-895-81	s	RES, CHIP 2.2K (1005)
R108	1-208-911-81	s	RES, CHIP 10K (1005)
R109	1-208-855-81	s	RES, CHIP 47 (1005)
R110	1-208-883-81	s	RES, CHIP 680 (1005)
R111	1-220-878-81	s	RES, CHIP 22 (1005)
R112	1-208-855-81	s	RES, CHIP 47 (1005)
R113	1-208-883-81	s	RES, CHIP 680 (1005)
R114	1-208-855-81	s	RES, CHIP 47 (1005)
R115	1-208-895-81	s	RES, CHIP 2.2K (1005)
R116	1-208-863-81	s	RES, CHIP 100 (1005)
R117	1-208-855-81	s	RES, CHIP 47 (1005)
R118	1-208-871-81	s	RES, CHIP 220 (1005)
R119	1-208-855-81	s	RES, CHIP 47 (1005)
R120	1-208-863-81	s	RES, CHIP 100 (1005)
R121	1-208-855-81	s	RES, CHIP 47 (1005)
R122	1-208-871-81	s	RES, CHIP 220 (1005)
R123	1-208-855-81	s	RES, CHIP 47 (1005)
R124	1-208-895-81	s	RES, CHIP 2.2K (1005)
R125	1-208-895-81	s	RES, CHIP 2.2K (1005)
R126	1-208-899-81	s	RES, CHIP 3.3K (1005)
R127	1-208-879-81	s	RES, CHIP 470 (1005)
R128	1-208-895-81	s	RES, CHIP 2.2K (1005)
R129	1-208-899-81	s	RES, CHIP 3.3K (1005)
R130	1-208-879-81	s	RES, CHIP 470 (1005)
R131	1-208-855-81	s	RES, CHIP 47 (1005)

(MX-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R132	1-208-863-81	s	RES, CHIP 100 (1005)
R133	1-208-855-81	s	RES, CHIP 47 (1005)
R134	1-208-871-81	s	RES, CHIP 220 (1005)
R135	1-208-855-81	s	RES, CHIP 47 (1005)
R136	1-208-863-81	s	RES, CHIP 100 (1005)
R137	1-220-882-81	s	RES, CHIP 33 (1005)
R138	1-208-871-81	s	RES, CHIP 220 (1005)
R139	1-208-855-81	s	RES, CHIP 47 (1005)
R140	1-208-895-81	s	RES, CHIP 2.2K (1005)
R141	1-208-899-81	s	RES, CHIP 3.3K (1005)
R142	1-208-879-81	s	RES, CHIP 470 (1005)
R143	1-208-895-81	s	RES, CHIP 2.2K (1005)
R144	1-208-899-81	s	RES, CHIP 3.3K (1005)
R145	1-208-879-81	s	RES, CHIP 470 (1005)
R146	1-208-855-81	s	RES, CHIP 47 (1005)
R147	1-208-863-81	s	RES, CHIP 100 (1005)
R148	1-208-855-81	s	RES, CHIP 47 (1005)
R149	1-208-871-81	s	RES, CHIP 220 (1005)
R150	1-208-855-81	s	RES, CHIP 47 (1005)
R151	1-208-863-81	s	RES, CHIP 100 (1005)
R152	1-220-882-81	s	RES, CHIP 33 (1005)
R153	1-208-871-81	s	RES, CHIP 220 (1005)
R154	1-208-855-81	s	RES, CHIP 47 (1005)
R155	1-208-895-81	s	RES, CHIP 2.2K (1005)
R156	1-208-899-81	s	RES, CHIP 3.3K (1005)
R157	1-208-879-81	s	RES, CHIP 470 (1005)
R158	1-208-895-81	s	RES, CHIP 2.2K (1005)
R159	1-208-899-81	s	RES, CHIP 3.3K (1005)
R160	1-208-879-81	s	RES, CHIP 470 (1005)
R161	1-208-855-81	s	RES, CHIP 47 (1005)
R162	1-208-863-81	s	RES, CHIP 100 (1005)
R163	1-208-855-81	s	RES, CHIP 47 (1005)
R164	1-208-871-81	s	RES, CHIP 220 (1005)
R165	1-220-878-81	s	RES, CHIP 22 (1005)
R166	1-220-882-81	s	RES, CHIP 33 (1005)
R167	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R168	1-208-855-81	s	RES, CHIP 47 (1005)
R169	1-208-863-81	s	RES, CHIP 100 (1005)
R170	1-220-882-81	s	RES, CHIP 33 (1005)
R171	1-208-871-81	s	RES, CHIP 220 (1005)
R172	1-220-878-81	s	RES, CHIP 22 (1005)
R173	1-220-882-81	s	RES, CHIP 33 (1005)
R174	1-208-903-81	s	RES, CHIP 4.7K (1005)
R175	1-208-895-81	s	RES, CHIP 2.2K (1005)
R176	1-208-899-81	s	RES, CHIP 3.3K (1005)
R177	1-208-879-81	s	RES, CHIP 470 (1005)
R178	1-208-903-81	s	RES, CHIP 4.7K (1005)
R179	1-208-895-81	s	RES, CHIP 2.2K (1005)
R180	1-208-899-81	s	RES, CHIP 3.3K (1005)
R181	1-208-879-81	s	RES, CHIP 470 (1005)
R182	1-208-879-81	s	RES, CHIP 470 (1005)
R183	1-208-879-81	s	RES, CHIP 470 (1005)
R184	1-208-879-81	s	RES, CHIP 470 (1005)
R201	1-208-871-81	s	RES, CHIP 220 (1005)
R202	1-208-871-81	s	RES, CHIP 220 (1005)
R204	1-208-903-81	s	RES, CHIP 4.7K (1005)
R206	1-208-919-81	s	RES, CHIP 22K (1005)
R208	1-208-919-81	s	RES, CHIP 22K (1005)
R209	1-208-911-81	s	RES, CHIP 10K (1005)

(MX-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R210	1-208-887-81	s	RES, CHIP 1.0K (1005)
R211	1-208-911-81	s	RES, CHIP 10K (1005)
R212	1-208-911-81	s	RES, CHIP 10K (1005)
R213	1-208-863-81	s	RES, CHIP 100 (1005)
R214	1-208-891-81	s	RES, CHIP 1.5K (1005)
R215	1-220-878-81	s	RES, CHIP 22 (1005)
R216	1-220-878-81	s	RES, CHIP 22 (1005)
R218	1-220-882-81	s	RES, CHIP 33 (1005)
R219	1-208-879-81	s	RES, CHIP 470 (1005)
R220	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R221	1-208-855-81	s	RES, CHIP 47 (1005)
R222	1-208-863-81	s	RES, CHIP 100 (1005)
R223	1-208-867-81	s	RES, CHIP 150 (1005)
R225	1-208-875-81	s	RES, CHIP 330 (1005)
R226	1-208-855-81	s	RES, CHIP 47 (1005)
R227	1-208-863-81	s	RES, CHIP 100 (1005)
R230	1-208-915-81	s	RES, CHIP 15K (1005)
R231	1-208-895-81	s	RES, CHIP 2.2K (1005)
R232	1-208-907-81	s	RES, CHIP 6.8K (1005)
R233	1-208-875-81	s	RES, CHIP 330 (1005)
R234	1-208-887-81	s	RES, CHIP 1.0K (1005)
R236	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R237	1-208-887-81	s	RES, CHIP 1.0K (1005)
R238	1-218-977-81	s	RES, CHIP 100K
R240	1-208-919-81	s	RES, CHIP 22K (1005)
R241	1-218-977-81	s	RES, CHIP 100K
R242	1-208-911-81	s	RES, CHIP 10K (1005)
R243	1-208-899-81	s	RES, CHIP 3.3K (1005)
R244	1-208-891-81	s	RES, CHIP 1.5K (1005)
R246	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R247	1-208-891-81	s	RES, CHIP 1.5K (1005)
R248	1-218-977-81	s	RES, CHIP 100K
R249	1-208-863-81	s	RES, CHIP 100 (1005)
R250	1-208-887-81	s	RES, CHIP 1.0K (1005)
R252	1-208-879-81	s	RES, CHIP 470 (1005)
R253	1-208-887-81	s	RES, CHIP 1.0K (1005)
R254	1-208-915-81	s	RES, CHIP 15K (1005)
R255	1-208-887-81	s	RES, CHIP 1.0K (1005)
R256	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R257	1-208-927-81	s	RES, CHIP 47K (1005)
R258	1-208-863-81	s	RES, CHIP 100 (1005)
R259	1-208-863-81	s	RES, CHIP 100 (1005)
R260	1-208-911-81	s	RES, CHIP 10K (1005)
R261	1-208-903-81	s	RES, CHIP 4.7K (1005)
R262	1-218-989-81	s	RES, CHIP 1M
R263	1-208-863-81	s	RES, CHIP 100 (1005)
R264	1-208-863-81	s	RES, CHIP 100 (1005)
R265	1-218-981-81	s	RES, CHIP 220K
R266	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R267	1-208-895-81	s	RES, CHIP 2.2K (1005)
R268	1-208-911-81	s	RES, CHIP 10K (1005)
R269	1-208-903-81	s	RES, CHIP 4.7K (1005)
R270	1-208-895-81	s	RES, CHIP 2.2K (1005)
R271	1-208-883-81	s	RES, CHIP 680 (1005)
R272	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R273	1-208-895-81	s	RES, CHIP 2.2K (1005)
R274	1-208-911-81	s	RES, CHIP 10K (1005)
R275	1-208-911-81	s	RES, CHIP 10K (1005)
R276	1-208-895-81	s	RES, CHIP 2.2K (1005)

(MX-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R277	1-208-875-81	s	RES, CHIP 330 (1005)
R278	1-208-899-81	s	RES, CHIP 3.3K (1005)
R279	1-208-903-81	s	RES, CHIP 4.7K (1005)
R280	1-208-887-81	s	RES, CHIP 1.0K (1005)
R281	1-208-887-81	s	RES, CHIP 1.0K (1005)
R282	1-208-895-81	s	RES, CHIP 2.2K (1005)
R283	1-208-863-81	s	RES, CHIP 100 (1005)
R284	1-208-899-81	s	RES, CHIP 3.3K (1005)
R301	1-208-867-81	s	RES, CHIP 150 (1005)
R302	1-208-867-81	s	RES, CHIP 150 (1005)
RV201	1-225-789-21	s	RES, ADJ, CERMET 2K
THP1	⚠ 1-533-817-21	s	THERMISTOR
THP2	⚠ 1-533-817-21	s	THERMISTOR
TP101	1-535-877-22	s	CHIP, CHECKER
TP201	1-535-877-22	s	CHIP, CHECKER
TP202	1-535-877-22	s	CHIP, CHECKER
TP203	1-535-877-22	s	CHIP, CHECKER

PA-317 BOARD (SUFFIX 21-)

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1159-982-A	s	MOUNTED CIRCUIT BOARD, PA-317G
C101	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C102	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C103	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C106	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C107	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C108	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C109	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C110	1-135-646-91	s	CAP, CHIP FILM 1MF
C111	1-135-646-91	s	CAP, CHIP FILM 1MF
C112	1-135-646-91	s	CAP, CHIP FILM 1MF
C113	1-135-646-91	s	CAP, CHIP FILM 1MF
C114	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C115	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C116	1-165-908-91	s	CAP, CERAMIC 1000000PF B 1608
C117	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C118	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C119	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C120	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C121	1-165-908-91	s	CAP, CERAMIC 1000000PF B 1608
C122	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C123	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C124	1-165-908-91	s	CAP, CERAMIC 1000000PF B 1608
C125	1-165-908-91	s	CAP, CERAMIC 1000000PF B 1608
C126	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C127	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C128	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C129	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C130	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C131	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C132	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C133	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C135	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C136	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C137	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C138	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C139	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C140	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C141	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C142	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C145	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C146	1-165-908-91	s	CAP, CERAMIC 1000000PF B 1608
C147	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C148	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C149	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C150	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C151	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C152	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C153	1-165-908-91	s	CAP, CERAMIC 1000000PF B 1608
C154	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C155	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C156	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C157	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C158	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C159	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C160	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C161	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C162	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216

(PA-317 BOARD (SUFFIX 21-))

Ref. No. or Q'ty	Part No.	SP	Description
C163	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C164	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C165	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C166	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C167	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C168	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C169	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C170	1-165-908-91	s	CAP, CERAMIC 1000000PF B 1608
C171	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C172	1-165-908-91	s	CAP, CERAMIC 1000000PF B 1608
C173	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C174	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C175	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C176	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C177	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C178	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C180	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C182	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C183	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C184	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C185	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C186	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C187	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C188	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C189	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C190	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C191	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C192	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C193	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C194	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C195	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C196	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C197	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C198	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C200	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C201	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C202	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C203	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C206	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C207	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C208	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C209	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C210	1-135-646-91	s	CAP, CHIP FILM 1MF
C211	1-135-646-91	s	CAP, CHIP FILM 1MF
C212	1-135-646-91	s	CAP, CHIP FILM 1MF
C213	1-135-646-91	s	CAP, CHIP FILM 1MF
C214	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C215	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C216	1-165-908-91	s	CAP, CERAMIC 1000000PF B 1608
C217	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C218	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C219	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C220	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C221	1-165-908-91	s	CAP, CERAMIC 1000000PF B 1608
C222	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C223	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C224	1-165-908-91	s	CAP, CERAMIC 1000000PF B 1608
C225	1-165-908-91	s	CAP, CERAMIC 1000000PF B 1608
C226	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(PA-317 BOARD (SUFFIX 21-))

Ref. No. or Q'ty	Part No.	SP	Description
C227	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C228	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C229	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C230	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C231	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C232	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C233	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C235	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C236	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C237	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C238	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C239	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C240	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C241	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C242	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C245	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C246	1-165-908-91	s	CAP, CERAMIC 1000000PF B 1608
C247	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C248	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C249	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C250	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C251	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C252	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C253	1-165-908-91	s	CAP, CERAMIC 1000000PF B 1608
C254	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C255	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C256	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C257	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C258	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C259	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C260	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C261	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C262	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C263	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C264	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C265	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C266	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C267	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C268	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C269	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C270	1-165-908-91	s	CAP, CERAMIC 1000000PF B 1608
C271	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C272	1-165-908-91	s	CAP, CERAMIC 1000000PF B 1608
C273	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C274	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C275	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C276	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C277	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C278	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C280	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C282	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C283	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C284	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C285	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C286	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C287	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C288	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C289	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C290	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(PA-317 BOARD (SUFFIX 21-))

Ref. No. or Q'ty	Part No.	SP	Description
C291	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C292	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C293	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C294	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C295	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C296	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C297	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C298	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C300	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C301	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C302	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C303	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C306	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C307	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C308	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C309	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C310	1-135-646-91	s	CAP, CHIP FILM 1MF
C311	1-135-646-91	s	CAP, CHIP FILM 1MF
C312	1-135-646-91	s	CAP, CHIP FILM 1MF
C313	1-135-646-91	s	CAP, CHIP FILM 1MF
C314	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C315	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C316	1-165-908-91	s	CAP, CERAMIC 1000000PF B 1608
C317	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C318	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C319	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C320	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C321	1-165-908-91	s	CAP, CERAMIC 1000000PF B 1608
C322	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C323	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C324	1-165-908-91	s	CAP, CERAMIC 1000000PF B 1608
C325	1-165-908-91	s	CAP, CERAMIC 1000000PF B 1608
C326	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C327	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C328	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C329	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C330	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C331	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C332	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C333	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C335	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C336	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C337	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C338	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C339	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C340	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C341	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C342	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C345	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C346	1-165-908-91	s	CAP, CERAMIC 1000000PF B 1608
C347	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C348	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C349	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C350	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C351	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C352	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C353	1-165-908-91	s	CAP, CERAMIC 1000000PF B 1608
C354	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C355	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(PA-317 BOARD (SUFFIX 21-))

Ref. No. or Q'ty	Part No.	SP	Description
C356	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C357	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C358	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C359	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C360	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C361	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C362	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C363	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C364	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C365	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C366	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C367	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C368	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C369	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C370	1-165-908-91	s	CAP, CERAMIC 1000000PF B 1608
C371	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C372	1-165-908-91	s	CAP, CERAMIC 1000000PF B 1608
C373	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C374	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C375	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C376	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C377	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C378	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C380	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C382	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C383	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C384	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C385	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C386	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C387	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C388	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C389	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C390	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C391	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C392	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C393	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C394	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C395	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C396	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C397	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C398	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C400	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C401	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C402	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C403	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C404	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C405	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C406	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C407	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C408	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C409	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C410	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C411	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C412	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C413	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C414	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C415	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C416	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C417	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(PA-317 BOARD (SUFFIX 21-))

Ref. No. or Q'ty	Part No.	SP	Description
C418	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C419	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C420	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C423	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C424	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C425	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C426	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C427	1-126-395-21	s	CAP, CHIP ELECT 22MF (5X5.7)
C428	1-126-391-21	s	CAP, CHIP ELECT 47MF (5X5.7)
C429	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C430	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C431	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C432	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C433	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C434	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C435	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C436	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C437	1-165-903-21	s	CAP, ELECT 120MF (6.3X6)
C438	1-165-903-21	s	CAP, ELECT 120MF (6.3X6)
C439	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C440	1-126-395-21	s	CAP, CHIP ELECT 22MF (5X5.7)
C441	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C442	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C443	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C444	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C445	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C446	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C447	1-165-903-21	s	CAP, ELECT 120MF (6.3X6)
C448	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C449	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C450	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C452	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C453	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C464	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
CN101	1-785-900-21	s	CONNECTOR 5P
CN201	1-785-900-21	s	CONNECTOR 5P
CN301	1-785-900-21	s	CONNECTOR 5P
CN401	1-770-454-21	o	CONNECTOR, BOARD TO BOARD 70P
CN402	1-779-522-31	s	CONNECTOR, FFC/FPC(ZIF) AN 40P
E401	1-535-877-22	s	CHIP, CHECKER
FL101	1-813-545-11	s	FILTER, LOW PASS (37MHZ)
FL102	1-813-541-11	s	FILTER, LOW PASS
FL103	1-813-545-11	s	FILTER, LOW PASS (37MHZ)
FL201	1-813-545-11	s	FILTER, LOW PASS (37MHZ)
FL202	1-813-541-11	s	FILTER, LOW PASS
FL203	1-813-545-11	s	FILTER, LOW PASS (37MHZ)
FL301	1-813-545-11	s	FILTER, LOW PASS (37MHZ)
FL302	1-813-541-11	s	FILTER, LOW PASS
FL303	1-813-545-11	s	FILTER, LOW PASS (37MHZ)
IC101	6-706-863-01	s	IC LMH6732MFX/NOPB
IC102	6-706-863-01	s	IC LMH6732MFX/NOPB
IC106	8-753-261-02	s	IC CXA3648AR-T4
IC107	8-753-261-02	s	IC CXA3648AR-T4
IC108	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC109	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC110	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC111	6-706-863-01	s	IC LMH6732MFX/NOPB
IC112	6-706-863-01	s	IC LMH6732MFX/NOPB

(PA-317 BOARD (SUFFIX 21-))

Ref. No. or Q'ty	Part No.	SP	Description
IC201	6-706-863-01	s	IC LMH6732MFX/NOPB
IC202	6-706-863-01	s	IC LMH6732MFX/NOPB
IC206	8-753-261-02	s	IC CXA3648AR-T4
IC207	8-753-261-02	s	IC CXA3648AR-T4
IC208	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC209	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC210	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC211	6-706-863-01	s	IC LMH6732MFX/NOPB
IC212	6-706-863-01	s	IC LMH6732MFX/NOPB
IC301	6-706-863-01	s	IC LMH6732MFX/NOPB
IC302	6-706-863-01	s	IC LMH6732MFX/NOPB
IC306	8-753-261-02	s	IC CXA3648AR-T4
IC307	8-753-261-02	s	IC CXA3648AR-T4
IC308	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC309	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC310	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC311	6-706-863-01	s	IC LMH6732MFX/NOPB
IC312	6-706-863-01	s	IC LMH6732MFX/NOPB
IC401	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC402	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC403	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC404	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC405	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC406	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC407	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC408	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC409	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC410	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC411	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC412	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC413	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC414	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC415	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC416	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC417	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC418	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC419	8-759-685-34	s	IC M62352AGP-D60Q
IC420	8-759-685-34	s	IC M62352AGP-D60Q
IC421	6-704-976-01	s	IC ADR381ARTZ-REEL7
IC422	8-759-685-34	s	IC M62352AGP-D60Q
IC423	8-759-685-34	s	IC M62352AGP-D60Q
IC424	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC425	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC426	8-759-327-01	s	IC NJM062V(TE2)
IC427	8-759-327-01	s	IC NJM062V(TE2)
IC428	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC429	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC430	8-759-592-47	s	IC TC7SZ08FU(TE85R)
L101	1-414-751-91	s	INDUCTOR 1.0UH
L102	1-414-751-91	s	INDUCTOR 1.0UH
L201	1-414-751-91	s	INDUCTOR 1.0UH
L202	1-414-751-91	s	INDUCTOR 1.0UH
L301	1-414-751-91	s	INDUCTOR 1.0UH
L302	1-414-751-91	s	INDUCTOR 1.0UH
L401	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L402	1-414-394-41	s	INDUCTOR (SMD) 2.2UH
L403	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L404	1-416-344-21	s	COIL, CHOKE 10UH

(PA-317 BOARD (SUFFIX 21-))

Ref. No. or Q'ty	Part No.	SP	Description
Q401	8-729-144-81	s	TRANSISTOR 2SC4176T1B33B34B35
Q402	8-729-140-86	s	TRANSISTOR 2SA1610-T1Y34
Q403	8-729-230-27	s	TRANSISTOR 2SA1213Y-TE12L
Q404	8-729-209-77	s	TRANSISTOR 2SC2873Y-TE12L
Q405	8-729-144-81	s	TRANSISTOR 2SC4176T1B33B34B35
Q406	8-729-230-27	s	TRANSISTOR 2SA1213Y-TE12L
R102	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R104	1-218-941-11	s	RES, CHIP 100 (1005)
R105	1-218-941-11	s	RES, CHIP 100 (1005)
R106	1-218-941-11	s	RES, CHIP 100 (1005)
R107	1-218-941-11	s	RES, CHIP 100 (1005)
R109	1-208-683-11	s	RES, CHIP 1.0K (1005)
R110	1-208-683-11	s	RES, CHIP 1.0K (1005)
R111	1-208-935-81	s	RES, CHIP 100K (1005)
R112	1-208-931-81	s	RES, CHIP 68K (1005)
R113	1-208-891-81	s	RES, CHIP 1.5K (1005)
R114	1-208-891-81	s	RES, CHIP 1.5K (1005)
R115	1-208-889-81	s	RES, CHIP 1.2K (1005)
R116	1-208-699-11	s	RES, CHIP 4.7K (1005)
R117	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R118	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R119	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R120	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R121	1-208-889-81	s	RES, CHIP 1.2K (1005)
R122	1-208-699-11	s	RES, CHIP 4.7K (1005)
R123	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R124	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R125	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R126	1-208-855-81	s	RES, CHIP 47 (1005)
R127	1-208-855-81	s	RES, CHIP 47 (1005)
R128	1-208-855-81	s	RES, CHIP 47 (1005)
R129	1-208-855-81	s	RES, CHIP 47 (1005)
R130	1-208-855-81	s	RES, CHIP 47 (1005)
R131	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R132	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R133	1-208-855-81	s	RES, CHIP 47 (1005)
R134	1-208-855-81	s	RES, CHIP 47 (1005)
R135	1-208-855-81	s	RES, CHIP 47 (1005)
R136	1-208-855-81	s	RES, CHIP 47 (1005)
R137	1-208-855-81	s	RES, CHIP 47 (1005)
R138	1-208-855-81	s	RES, CHIP 47 (1005)
R139	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R140	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R141	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R142	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R143	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R144	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R145	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R146	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R147	1-208-911-81	s	RES, CHIP 10K (1005)
R148	1-208-911-81	s	RES, CHIP 10K (1005)
R149	1-208-911-81	s	RES, CHIP 10K (1005)
R150	1-208-911-81	s	RES, CHIP 10K (1005)
R151	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R152	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R153	1-208-879-81	s	RES, CHIP 470 (1005)
R154	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R155	1-208-879-81	s	RES, CHIP 470 (1005)

(PA-317 BOARD (SUFFIX 21-))

Ref. No. or Q'ty	Part No.	SP	Description
R157	1-208-855-81	s	RES, CHIP 47 (1005)
R158	1-208-855-81	s	RES, CHIP 47 (1005)
R159	1-218-945-11	s	RES, CHIP 220 (1005)
R160	1-218-945-11	s	RES, CHIP 220 (1005)
R161	1-208-683-11	s	RES, CHIP 1.0K (1005)
R162	1-208-875-81	s	RES, CHIP 330 (1005)
R163	1-208-879-81	s	RES, CHIP 470 (1005)
R164	1-208-911-81	s	RES, CHIP 10K (1005)
R165	1-208-911-81	s	RES, CHIP 10K (1005)
R166	1-208-879-81	s	RES, CHIP 470 (1005)
R168	1-208-683-11	s	RES, CHIP 1.0K (1005)
R169	1-208-683-11	s	RES, CHIP 1.0K (1005)
R170	1-208-683-11	s	RES, CHIP 1.0K (1005)
R171	1-208-683-11	s	RES, CHIP 1.0K (1005)
R172	1-208-855-81	s	RES, CHIP 47 (1005)
R173	1-208-683-11	s	RES, CHIP 1.0K (1005)
R174	1-208-683-11	s	RES, CHIP 1.0K (1005)
R175	1-218-945-11	s	RES, CHIP 220 (1005)
R176	1-208-927-81	s	RES, CHIP 47K (1005)
R177	1-208-927-81	s	RES, CHIP 47K (1005)
R178	1-208-683-11	s	RES, CHIP 1.0K (1005)
R179	1-208-683-11	s	RES, CHIP 1.0K (1005)
R180	1-208-875-81	s	RES, CHIP 330 (1005)
R181	1-218-941-11	s	RES, CHIP 100 (1005)
R182	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R183	1-218-941-11	s	RES, CHIP 100 (1005)
R184	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R185	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R186	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R187	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R188	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R189	1-208-865-81	s	RES, CHIP 120 (1005)
R190	1-208-865-81	s	RES, CHIP 120 (1005)
R202	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R204	1-218-941-11	s	RES, CHIP 100 (1005)
R205	1-218-941-11	s	RES, CHIP 100 (1005)
R206	1-218-941-11	s	RES, CHIP 100 (1005)
R207	1-218-941-11	s	RES, CHIP 100 (1005)
R209	1-208-683-11	s	RES, CHIP 1.0K (1005)
R210	1-208-683-11	s	RES, CHIP 1.0K (1005)
R211	1-208-935-81	s	RES, CHIP 100K (1005)
R212	1-208-931-81	s	RES, CHIP 68K (1005)
R213	1-208-891-81	s	RES, CHIP 1.5K (1005)
R214	1-208-891-81	s	RES, CHIP 1.5K (1005)
R215	1-208-889-81	s	RES, CHIP 1.2K (1005)
R216	1-208-699-11	s	RES, CHIP 4.7K (1005)
R217	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R218	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R219	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R220	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R221	1-208-889-81	s	RES, CHIP 1.2K (1005)
R222	1-208-699-11	s	RES, CHIP 4.7K (1005)
R223	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R224	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R225	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R226	1-208-855-81	s	RES, CHIP 47 (1005)
R227	1-208-855-81	s	RES, CHIP 47 (1005)
R228	1-208-855-81	s	RES, CHIP 47 (1005)
R229	1-208-855-81	s	RES, CHIP 47 (1005)

(PA-317 BOARD (SUFFIX 21-))

Ref. No. or Q'ty	Part No.	SP	Description
R230	1-208-855-81	s	RES, CHIP 47 (1005)
R231	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R232	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R233	1-208-855-81	s	RES, CHIP 47 (1005)
R234	1-208-855-81	s	RES, CHIP 47 (1005)
R235	1-208-855-81	s	RES, CHIP 47 (1005)
R236	1-208-855-81	s	RES, CHIP 47 (1005)
R237	1-208-855-81	s	RES, CHIP 47 (1005)
R238	1-208-855-81	s	RES, CHIP 47 (1005)
R239	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R240	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R241	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R242	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R243	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R244	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R245	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R246	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R247	1-208-911-81	s	RES, CHIP 10K (1005)
R248	1-208-911-81	s	RES, CHIP 10K (1005)
R249	1-208-911-81	s	RES, CHIP 10K (1005)
R250	1-208-911-81	s	RES, CHIP 10K (1005)
R251	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R252	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R253	1-208-879-81	s	RES, CHIP 470 (1005)
R254	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R255	1-208-879-81	s	RES, CHIP 470 (1005)
R257	1-208-855-81	s	RES, CHIP 47 (1005)
R258	1-208-855-81	s	RES, CHIP 47 (1005)
R259	1-218-945-11	s	RES, CHIP 220 (1005)
R260	1-218-945-11	s	RES, CHIP 220 (1005)
R261	1-208-683-11	s	RES, CHIP 1.0K (1005)
R262	1-208-875-81	s	RES, CHIP 330 (1005)
R263	1-208-879-81	s	RES, CHIP 470 (1005)
R264	1-208-911-81	s	RES, CHIP 10K (1005)
R265	1-208-911-81	s	RES, CHIP 10K (1005)
R266	1-208-879-81	s	RES, CHIP 470 (1005)
R268	1-208-683-11	s	RES, CHIP 1.0K (1005)
R269	1-208-683-11	s	RES, CHIP 1.0K (1005)
R270	1-208-683-11	s	RES, CHIP 1.0K (1005)
R271	1-208-683-11	s	RES, CHIP 1.0K (1005)
R272	1-208-855-81	s	RES, CHIP 47 (1005)
R273	1-208-683-11	s	RES, CHIP 1.0K (1005)
R274	1-208-683-11	s	RES, CHIP 1.0K (1005)
R275	1-218-945-11	s	RES, CHIP 220 (1005)
R276	1-208-927-81	s	RES, CHIP 47K (1005)
R277	1-208-927-81	s	RES, CHIP 47K (1005)
R278	1-208-683-11	s	RES, CHIP 1.0K (1005)
R279	1-208-683-11	s	RES, CHIP 1.0K (1005)
R280	1-208-875-81	s	RES, CHIP 330 (1005)
R281	1-218-941-11	s	RES, CHIP 100 (1005)
R282	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R283	1-218-941-11	s	RES, CHIP 100 (1005)
R284	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R285	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R286	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R287	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R288	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R289	1-208-865-81	s	RES, CHIP 120 (1005)
R290	1-208-865-81	s	RES, CHIP 120 (1005)

(PA-317 BOARD (SUFFIX 21-))

Ref. No. or Q'ty	Part No.	SP	Description
R302	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R304	1-218-941-11	s	RES, CHIP 100 (1005)
R305	1-218-941-11	s	RES, CHIP 100 (1005)
R306	1-218-941-11	s	RES, CHIP 100 (1005)
R307	1-218-941-11	s	RES, CHIP 100 (1005)
R309	1-208-683-11	s	RES, CHIP 1.0K (1005)
R310	1-208-683-11	s	RES, CHIP 1.0K (1005)
R311	1-208-935-81	s	RES, CHIP 100K (1005)
R312	1-208-931-81	s	RES, CHIP 68K (1005)
R313	1-208-891-81	s	RES, CHIP 1.5K (1005)
R314	1-208-891-81	s	RES, CHIP 1.5K (1005)
R315	1-208-889-81	s	RES, CHIP 1.2K (1005)
R316	1-208-699-11	s	RES, CHIP 4.7K (1005)
R317	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R318	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R319	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R320	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R321	1-208-889-81	s	RES, CHIP 1.2K (1005)
R322	1-208-699-11	s	RES, CHIP 4.7K (1005)
R323	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R324	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R325	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R326	1-208-855-81	s	RES, CHIP 47 (1005)
R327	1-208-855-81	s	RES, CHIP 47 (1005)
R328	1-208-855-81	s	RES, CHIP 47 (1005)
R329	1-208-855-81	s	RES, CHIP 47 (1005)
R330	1-208-855-81	s	RES, CHIP 47 (1005)
R331	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R332	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R333	1-208-855-81	s	RES, CHIP 47 (1005)
R334	1-208-855-81	s	RES, CHIP 47 (1005)
R335	1-208-855-81	s	RES, CHIP 47 (1005)
R336	1-208-855-81	s	RES, CHIP 47 (1005)
R337	1-208-855-81	s	RES, CHIP 47 (1005)
R338	1-208-855-81	s	RES, CHIP 47 (1005)
R339	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R340	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R341	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R342	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R343	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R344	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R345	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R346	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R347	1-208-911-81	s	RES, CHIP 10K (1005)
R348	1-208-911-81	s	RES, CHIP 10K (1005)
R349	1-208-911-81	s	RES, CHIP 10K (1005)
R350	1-208-911-81	s	RES, CHIP 10K (1005)
R351	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R352	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R353	1-208-879-81	s	RES, CHIP 470 (1005)
R354	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R355	1-208-879-81	s	RES, CHIP 470 (1005)
R357	1-208-855-81	s	RES, CHIP 47 (1005)
R358	1-208-855-81	s	RES, CHIP 47 (1005)
R359	1-218-945-11	s	RES, CHIP 220 (1005)
R360	1-218-945-11	s	RES, CHIP 220 (1005)
R361	1-208-683-11	s	RES, CHIP 1.0K (1005)
R362	1-208-875-81	s	RES, CHIP 330 (1005)
R363	1-208-879-81	s	RES, CHIP 470 (1005)

(PA-317 BOARD (SUFFIX 21-))

Ref. No. or Q'ty	Part No.	SP	Description
R364	1-208-911-81	s	RES, CHIP 10K (1005)
R365	1-208-911-81	s	RES, CHIP 10K (1005)
R366	1-208-879-81	s	RES, CHIP 470 (1005)
R368	1-208-683-11	s	RES, CHIP 1.0K (1005)
R369	1-208-683-11	s	RES, CHIP 1.0K (1005)
R370	1-208-683-11	s	RES, CHIP 1.0K (1005)
R371	1-208-683-11	s	RES, CHIP 1.0K (1005)
R372	1-208-855-81	s	RES, CHIP 47 (1005)
R373	1-208-683-11	s	RES, CHIP 1.0K (1005)
R374	1-208-683-11	s	RES, CHIP 1.0K (1005)
R375	1-218-945-11	s	RES, CHIP 220 (1005)
R376	1-208-927-81	s	RES, CHIP 47K (1005)
R377	1-208-927-81	s	RES, CHIP 47K (1005)
R378	1-208-683-11	s	RES, CHIP 1.0K (1005)
R379	1-208-683-11	s	RES, CHIP 1.0K (1005)
R380	1-208-875-81	s	RES, CHIP 330 (1005)
R381	1-218-941-11	s	RES, CHIP 100 (1005)
R382	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R383	1-218-941-11	s	RES, CHIP 100 (1005)
R384	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R385	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R386	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R387	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R388	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R389	1-208-865-81	s	RES, CHIP 120 (1005)
R390	1-208-865-81	s	RES, CHIP 120 (1005)
R401	1-208-643-11	s	RES, CHIP 22 (1005)
R402	1-208-643-11	s	RES, CHIP 22 (1005)
R403	1-208-643-11	s	RES, CHIP 22 (1005)
R404	1-208-643-11	s	RES, CHIP 22 (1005)
R405	1-208-643-11	s	RES, CHIP 22 (1005)
R406	1-208-643-11	s	RES, CHIP 22 (1005)
R407	1-208-643-11	s	RES, CHIP 22 (1005)
R408	1-208-643-11	s	RES, CHIP 22 (1005)
R409	1-208-643-11	s	RES, CHIP 22 (1005)
R410	1-208-643-11	s	RES, CHIP 22 (1005)
R411	1-208-643-11	s	RES, CHIP 22 (1005)
R412	1-208-643-11	s	RES, CHIP 22 (1005)
R413	1-208-643-11	s	RES, CHIP 22 (1005)
R414	1-208-643-11	s	RES, CHIP 22 (1005)
R415	1-208-643-11	s	RES, CHIP 22 (1005)
R416	1-208-643-11	s	RES, CHIP 22 (1005)
R417	1-208-643-11	s	RES, CHIP 22 (1005)
R418	1-208-643-11	s	RES, CHIP 22 (1005)
R419	1-218-941-11	s	RES, CHIP 100 (1005)
R420	1-218-941-11	s	RES, CHIP 100 (1005)
R421	1-218-941-11	s	RES, CHIP 100 (1005)
R422	1-218-941-11	s	RES, CHIP 100 (1005)
R423	1-218-945-11	s	RES, CHIP 220 (1005)
R424	1-208-683-11	s	RES, CHIP 1.0K (1005)
R425	1-208-683-11	s	RES, CHIP 1.0K (1005)
R426	1-208-683-11	s	RES, CHIP 1.0K (1005)
R427	1-208-683-11	s	RES, CHIP 1.0K (1005)
R428	1-208-683-11	s	RES, CHIP 1.0K (1005)
R429	1-208-683-11	s	RES, CHIP 1.0K (1005)
R430	1-208-683-11	s	RES, CHIP 1.0K (1005)
R431	1-208-683-11	s	RES, CHIP 1.0K (1005)
R432	1-208-683-11	s	RES, CHIP 1.0K (1005)
R433	1-208-683-11	s	RES, CHIP 1.0K (1005)

(PA-317 BOARD (SUFFIX 21-))

Ref. No. or Q'ty	Part No.	SP	Description
R435	1-218-945-11	s	RES, CHIP 220 (1005)
R436	1-218-945-11	s	RES, CHIP 220 (1005)
R437	1-218-941-11	s	RES, CHIP 100 (1005)
R438	1-208-683-11	s	RES, CHIP 1.0K (1005)
R439	1-208-683-11	s	RES, CHIP 1.0K (1005)
R440	1-208-683-11	s	RES, CHIP 1.0K (1005)
R441	1-208-683-11	s	RES, CHIP 1.0K (1005)
R442	1-208-683-11	s	RES, CHIP 1.0K (1005)
R443	1-208-683-11	s	RES, CHIP 1.0K (1005)
R444	1-208-683-11	s	RES, CHIP 1.0K (1005)
R445	1-208-683-11	s	RES, CHIP 1.0K (1005)
R446	1-208-683-11	s	RES, CHIP 1.0K (1005)
R447	1-208-683-11	s	RES, CHIP 1.0K (1005)
R448	1-208-683-11	s	RES, CHIP 1.0K (1005)
R449	1-208-683-11	s	RES, CHIP 1.0K (1005)
R450	1-208-927-81	s	RES, CHIP 47K (1005)
R451	1-208-927-81	s	RES, CHIP 47K (1005)
R452	1-208-911-81	s	RES, CHIP 10K (1005)
R453	1-208-699-11	s	RES, CHIP 4.7K (1005)
R454	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R455	1-208-699-11	s	RES, CHIP 4.7K (1005)
R456	1-218-941-11	s	RES, CHIP 100 (1005)
R457	1-208-683-11	s	RES, CHIP 1.0K (1005)
R458	1-208-683-11	s	RES, CHIP 1.0K (1005)
R459	1-208-683-11	s	RES, CHIP 1.0K (1005)
R460	1-208-683-11	s	RES, CHIP 1.0K (1005)
R461	1-208-683-11	s	RES, CHIP 1.0K (1005)
R462	1-208-683-11	s	RES, CHIP 1.0K (1005)
R463	1-208-683-11	s	RES, CHIP 1.0K (1005)
R464	1-208-683-11	s	RES, CHIP 1.0K (1005)
R465	1-208-683-11	s	RES, CHIP 1.0K (1005)
R466	1-208-683-11	s	RES, CHIP 1.0K (1005)
R467	1-208-683-11	s	RES, CHIP 1.0K (1005)
R468	1-208-683-11	s	RES, CHIP 1.0K (1005)
R469	1-218-941-11	s	RES, CHIP 100 (1005)
R470	1-218-941-11	s	RES, CHIP 100 (1005)
R471	1-208-683-11	s	RES, CHIP 1.0K (1005)
R472	1-218-945-11	s	RES, CHIP 220 (1005)
R473	1-218-945-11	s	RES, CHIP 220 (1005)
R474	1-208-683-11	s	RES, CHIP 1.0K (1005)
R475	1-218-941-11	s	RES, CHIP 100 (1005)
R476	1-208-911-81	s	RES, CHIP 10K (1005)
R477	1-208-683-11	s	RES, CHIP 1.0K (1005)
R478	1-208-683-11	s	RES, CHIP 1.0K (1005)
R479	1-208-683-11	s	RES, CHIP 1.0K (1005)
R480	1-208-683-11	s	RES, CHIP 1.0K (1005)
R481	1-208-683-11	s	RES, CHIP 1.0K (1005)
R482	1-208-683-11	s	RES, CHIP 1.0K (1005)
R483	1-208-683-11	s	RES, CHIP 1.0K (1005)
R484	1-208-683-11	s	RES, CHIP 1.0K (1005)
R485	1-208-683-11	s	RES, CHIP 1.0K (1005)
R486	1-208-683-11	s	RES, CHIP 1.0K (1005)
R487	1-208-683-11	s	RES, CHIP 1.0K (1005)
R488	1-208-683-11	s	RES, CHIP 1.0K (1005)
R489	1-208-905-81	s	RES, CHIP 5.6K (1005)
R490	1-218-945-11	s	RES, CHIP 220 (1005)
R491	1-208-699-11	s	RES, CHIP 4.7K (1005)
R492	1-218-941-11	s	RES, CHIP 100 (1005)
R493	1-218-945-11	s	RES, CHIP 220 (1005)

(PA-317 BOARD (SUFFIX 21-))

Ref. No. or Q'ty	Part No.	SP	Description
R494	1-208-643-11	s	RES, CHIP 22 (1005)
R495	1-208-643-11	s	RES, CHIP 22 (1005)
R496	1-208-643-11	s	RES, CHIP 22 (1005)
R497	1-208-643-11	s	RES, CHIP 22 (1005)
R498	1-208-643-11	s	RES, CHIP 22 (1005)
R499	1-208-643-11	s	RES, CHIP 22 (1005)
R500	1-208-643-11	s	RES, CHIP 22 (1005)
R501	1-208-643-11	s	RES, CHIP 22 (1005)
R502	1-208-643-11	s	RES, CHIP 22 (1005)
R503	1-208-643-11	s	RES, CHIP 22 (1005)
R504	1-208-643-11	s	RES, CHIP 22 (1005)
R505	1-208-643-11	s	RES, CHIP 22 (1005)
R506	1-208-643-11	s	RES, CHIP 22 (1005)
R507	1-208-643-11	s	RES, CHIP 22 (1005)
R508	1-208-643-11	s	RES, CHIP 22 (1005)
R509	1-208-643-11	s	RES, CHIP 22 (1005)
R510	1-208-643-11	s	RES, CHIP 22 (1005)
R511	1-208-643-11	s	RES, CHIP 22 (1005)
RV101	1-227-405-21	s	RES, ADJ, CERMET 220
RV102	1-227-405-21	s	RES, ADJ, CERMET 220
RV103	1-227-405-21	s	RES, ADJ, CERMET 220
RV201	1-227-405-21	s	RES, ADJ, CERMET 220
RV202	1-227-405-21	s	RES, ADJ, CERMET 220
RV203	1-227-405-21	s	RES, ADJ, CERMET 220
RV301	1-227-405-21	s	RES, ADJ, CERMET 220
RV302	1-227-405-21	s	RES, ADJ, CERMET 220
RV303	1-227-405-21	s	RES, ADJ, CERMET 220

PA-317 BOARD (SUFFIX 14)

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1159-982-A	s	MOUNTED CIRCUIT BOARD, PA-317G (GOLD)
	A-1099-263-A	s	MOUNTED CIRCUIT BOARD, PA-317 (SILVER)
C106	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C107	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C108	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C109	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C110	1-135-646-11	s	CAPACITOR,CHIP FILM 1MF 16V
C111	1-135-646-11	s	CAPACITOR,CHIP FILM 1MF 16V
C112	1-135-646-11	s	CAPACITOR,CHIP FILM 1MF 16V
C113	1-135-646-11	s	CAPACITOR,CHIP FILM 1MF 16V
C114	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C115	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C116	1-165-908-11	s	CAP, CERAMIC 1MF B 1608
C117	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C118	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C119	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C121	1-165-908-11	s	CAP, CERAMIC 1MF B 1608
C122	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C123	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C124	1-165-908-11	s	CAP, CERAMIC 1MF B 1608
C125	1-165-908-11	s	CAP, CERAMIC 1MF B 1608
C126	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C127	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C128	1-165-871-11	s	CAPACITOR,ELECT 22MF
C129	1-165-871-11	s	CAPACITOR,ELECT 22MF
C130	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C131	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C132	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C133	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C135	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C136	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C138	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C139	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C140	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C141	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C142	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C145	1-164-845-11	s	CAPACITOR,CERAMIC 5PF/16V(1005
C146	1-165-908-11	s	CAP, CERAMIC 1MF B 1608
C147	1-165-871-11	s	CAPACITOR,ELECT 22MF
C148	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C149	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C150	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C151	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C152	1-164-845-11	s	CAPACITOR,CERAMIC 5PF/16V(1005
C153	1-165-908-11	s	CAP, CERAMIC 1MF B 1608
C154	1-165-871-11	s	CAPACITOR,ELECT 22MF
C155	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C156	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C157	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C158	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C159	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C160	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C161	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C162	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C163	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)

(PA-317 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
C164	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C165	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C166	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C167	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C168	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C169	1-165-871-11	s	CAPACITOR,ELECT 22MF
C170	1-165-908-11	s	CAP, CERAMIC 1MF B 1608
C171	1-165-871-11	s	CAPACITOR,ELECT 22MF
C172	1-165-908-11	s	CAP, CERAMIC 1MF B 1608
C173	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C174	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C175	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C176	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C177	1-164-845-11	s	CAPACITOR,CERAMIC 5PF/16V(1005
C178	1-164-845-11	s	CAPACITOR,CERAMIC 5PF/16V(1005
C180	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C182	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C183	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C184	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C185	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C186	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C187	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C188	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C189	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C190	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C191	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C192	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C193	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C194	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C195	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C196	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C197	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C198	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C200	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C206	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C207	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C208	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C209	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C210	1-135-646-11	s	CAPACITOR,CHIP FILM 1MF 16V
C211	1-135-646-11	s	CAPACITOR,CHIP FILM 1MF 16V
C212	1-135-646-11	s	CAPACITOR,CHIP FILM 1MF 16V
C213	1-135-646-11	s	CAPACITOR,CHIP FILM 1MF 16V
C214	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C215	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C216	1-165-908-11	s	CAP, CERAMIC 1MF B 1608
C217	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C218	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C219	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C221	1-165-908-11	s	CAP, CERAMIC 1MF B 1608
C222	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C223	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C224	1-165-908-11	s	CAP, CERAMIC 1MF B 1608
C225	1-165-908-11	s	CAP, CERAMIC 1MF B 1608
C226	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C227	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C228	1-165-871-11	s	CAPACITOR,ELECT 22MF
C229	1-165-871-11	s	CAPACITOR,ELECT 22MF
C230	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C231	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V

(PA-317 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
C232	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C233	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C235	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C236	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C238	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C239	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C240	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C241	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C242	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C245	1-164-845-11	s	CAPACITOR,CERAMIC 5PF/16V(1005
C246	1-165-908-11	s	CAP, CERAMIC 1MF B 1608
C247	1-165-871-11	s	CAPACITOR,ELECT 22MF
C248	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C249	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C250	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C251	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C252	1-164-845-11	s	CAPACITOR,CERAMIC 5PF/16V(1005
C253	1-165-908-11	s	CAP, CERAMIC 1MF B 1608
C254	1-165-871-11	s	CAPACITOR,ELECT 22MF
C255	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C256	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C257	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C258	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C259	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C260	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C261	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C262	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C263	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C264	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C265	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C266	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C267	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C268	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C269	1-165-871-11	s	CAPACITOR,ELECT 22MF
C270	1-165-908-11	s	CAP, CERAMIC 1MF B 1608
C271	1-165-871-11	s	CAPACITOR,ELECT 22MF
C272	1-165-908-11	s	CAP, CERAMIC 1MF B 1608
C273	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C274	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C275	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C276	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C277	1-164-845-11	s	CAPACITOR,CERAMIC 5PF/16V(1005
C278	1-164-845-11	s	CAPACITOR,CERAMIC 5PF/16V(1005
C280	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C282	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C283	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C284	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C285	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C286	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C287	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C288	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C289	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C290	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C291	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C292	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C293	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C294	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C295	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C296	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(PA-317 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
C297	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C298	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C300	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C306	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C307	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C308	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C309	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C310	1-135-646-11	s	CAPACITOR,CHIP FILM 1MF 16V
C311	1-135-646-11	s	CAPACITOR,CHIP FILM 1MF 16V
C312	1-135-646-11	s	CAPACITOR,CHIP FILM 1MF 16V
C313	1-135-646-11	s	CAPACITOR,CHIP FILM 1MF 16V
C314	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C315	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C316	1-165-908-11	s	CAP, CERAMIC 1MF B 1608
C317	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C318	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C319	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C321	1-165-908-11	s	CAP, CERAMIC 1MF B 1608
C322	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C323	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C324	1-165-908-11	s	CAP, CERAMIC 1MF B 1608
C325	1-165-908-11	s	CAP, CERAMIC 1MF B 1608
C326	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C327	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C328	1-165-871-11	s	CAPACITOR,ELECT 22MF
C329	1-165-871-11	s	CAPACITOR,ELECT 22MF
C330	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C331	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C332	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C333	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C335	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C336	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C338	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C339	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C340	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C341	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C342	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C345	1-164-845-11	s	CAPACITOR,CERAMIC 5PF/16V(1005
C346	1-165-908-11	s	CAP, CERAMIC 1MF B 1608
C347	1-165-871-11	s	CAPACITOR,ELECT 22MF
C348	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C349	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C350	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C351	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C352	1-164-845-11	s	CAPACITOR,CERAMIC 5PF/16V(1005
C353	1-165-908-11	s	CAP, CERAMIC 1MF B 1608
C354	1-165-871-11	s	CAPACITOR,ELECT 22MF
C355	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C356	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C357	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C358	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C359	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C360	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C361	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C362	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C363	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C364	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C365	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C366	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V

(PA-317 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
C367	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C368	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C369	1-165-871-11	s	CAPACITOR,ELECT 22MF
C370	1-165-908-11	s	CAP, CERAMIC 1MF B 1608
C371	1-165-871-11	s	CAPACITOR,ELECT 22MF
C372	1-165-908-11	s	CAP, CERAMIC 1MF B 1608
C373	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C374	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C375	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C376	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C377	1-164-845-11	s	CAPACITOR,CERAMIC 5PF/16V(1005
C378	1-164-845-11	s	CAPACITOR,CERAMIC 5PF/16V(1005
C380	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C382	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C383	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C384	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C385	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C386	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C387	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C388	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C389	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C390	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C391	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C392	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C393	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C394	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C395	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C396	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C397	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C398	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C400	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C401	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C402	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C403	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C404	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C405	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C406	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C407	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C408	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C409	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C410	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C411	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C412	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C413	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C414	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C415	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C416	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C417	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C418	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C419	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C420	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C423	1-165-884-91	s	CAPACITOR, CERAMIC 2.2MF(1608)
C424	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C425	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C426	1-165-884-91	s	CAPACITOR, CERAMIC 2.2MF(1608)
C427	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C428	1-126-391-11	s	CAPACITOR ELECT 47MF/6.3V(105)
C429	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C430	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V

(PA-317 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
C431	1-165-884-91	s	CAPACITOR, CERAMIC 2.2MF(1608)
C432	1-165-884-91	s	CAPACITOR, CERAMIC 2.2MF(1608)
C433	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C434	1-165-884-91	s	CAPACITOR, CERAMIC 2.2MF(1608)
C435	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C436	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C437	1-165-881-21	s	CAPACITOR, ELECT 120MF(6.3X6)
C438	1-165-881-21	s	CAPACITOR, ELECT 120MF(6.3X6)
C439	1-165-884-91	s	CAPACITOR, CERAMIC 2.2MF(1608)
C440	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C441	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C442	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C443	1-165-884-91	s	CAPACITOR, CERAMIC 2.2MF(1608)
C444	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C445	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C446	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C447	1-165-881-21	s	CAPACITOR, ELECT 120MF(6.3X6)
C448	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C449	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C450	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C452	1-164-858-11	s	CAPACITOR,CERAMIC 22PF/50V
C453	1-164-858-11	s	CAPACITOR,CERAMIC 22PF/50V
C464	1-164-858-11	s	CAPACITOR,CERAMIC 22PF/50V
CN101	1-785-900-11	s	CONNECTOR
CN201	1-785-900-11	s	CONNECTOR
CN301	1-785-900-11	s	CONNECTOR
CN401	1-770-454-21	o	CONNECTOR, BOARD TO BOARD 70P
CN402	1-779-522-31	s	CONNECTOR, FFC/FPC(ZIF) AN 40P (GOLD)
E401	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
FL101	1-813-545-11	s	FILTER, LOW PASS (37MHZ)
FL102	1-813-541-11	s	FILTER, LOW PASS
FL103	1-813-545-11	s	FILTER, LOW PASS (37MHZ)
FL201	1-813-545-11	s	FILTER, LOW PASS (37MHZ)
FL202	1-813-541-11	s	FILTER, LOW PASS
FL203	1-813-545-11	s	FILTER, LOW PASS (37MHZ)
FL301	1-813-545-11	s	FILTER, LOW PASS (37MHZ)
FL302	1-813-541-11	s	FILTER, LOW PASS
FL303	1-813-545-11	s	FILTER, LOW PASS (37MHZ)
IC101	6-706-863-01	s	IC LMH6732MFX/NOPB
IC102	6-706-863-01	s	IC LMH6732MFX/NOPB
IC108	8-759-561-46	s	IC AD8014ART-REEL7
IC109	8-759-561-46	s	IC AD8014ART-REEL7
IC110	8-759-561-46	s	IC AD8014ART-REEL7
IC111	6-706-863-01	s	IC LMH6732MFX/NOPB
IC112	6-706-863-01	s	IC LMH6732MFX/NOPB
IC201	6-706-863-01	s	IC LMH6732MFX/NOPB
IC202	6-706-863-01	s	IC LMH6732MFX/NOPB
IC208	8-759-561-46	s	IC AD8014ART-REEL7
IC209	8-759-561-46	s	IC AD8014ART-REEL7
IC210	8-759-561-46	s	IC AD8014ART-REEL7
IC211	6-706-863-01	s	IC LMH6732MFX/NOPB
IC212	6-706-863-01	s	IC LMH6732MFX/NOPB
IC301	6-706-863-01	s	IC LMH6732MFX/NOPB
IC302	6-706-863-01	s	IC LMH6732MFX/NOPB
IC308	8-759-561-46	s	IC AD8014ART-REEL7
IC309	8-759-561-46	s	IC AD8014ART-REEL7
IC310	8-759-561-46	s	IC AD8014ART-REEL7
IC311	6-706-863-01	s	IC LMH6732MFX/NOPB

(PA-317 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
IC312	6-706-863-01	s	IC LMH6732MFX/NOPB
IC401	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC402	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC403	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC404	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC405	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC406	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC407	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC408	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC409	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC410	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC411	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC412	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC413	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC414	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC415	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC416	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC417	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC418	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC419	8-759-685-33	s	IC BU2500FV-E2
IC420	8-759-685-33	s	IC BU2500FV-E2
IC421	6-704-976-01	s	IC ADR381ART-REEL7
IC422	8-759-685-33	s	IC BU2500FV-E2
IC423	8-759-685-33	s	IC BU2500FV-E2
IC424	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC425	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC426	8-759-327-01	s	IC NJM062V-TE2
IC427	8-759-327-01	s	IC NJM062V-TE2
IC428	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC429	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC430	8-759-592-47	s	IC TC7SZ08FU(TE85R)
L101	1-414-751-11	s	INDUCTOR 1.0UH
L102	1-414-751-11	s	INDUCTOR 1.0UH
L201	1-414-751-11	s	INDUCTOR 1.0UH
L202	1-414-751-11	s	INDUCTOR 1.0UH
L301	1-414-751-11	s	INDUCTOR 1.0UH
L302	1-414-751-11	s	INDUCTOR 1.0UH
L401	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L402	1-414-394-11	s	INDUCTOR (SMD) 2.2UH
L403	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L404	1-416-344-11	s	COIL, CHOKE 10UH
Q401	8-729-143-13	s	TRANSISTOR 2SC4176-B34
Q402	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q403	8-729-230-27	s	TRANSISTOR 2SA1213Y-TE12L
Q404	8-729-807-51	s	TRANSISTOR 2SD1623-S
Q405	8-729-143-13	s	TRANSISTOR 2SC4176-B34
Q406	8-729-230-27	s	TRANSISTOR 2SA1213Y-TE12L
R104	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R105	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R106	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R107	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R109	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R110	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R111	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R112	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R113	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005
R114	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005

(PA-317 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
R115	1-218-849-11	s	RESISTOR,CHIP 1.2K 1/10W(1608)
R116	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R117	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R118	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R119	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R120	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R121	1-218-849-11	s	RESISTOR,CHIP 1.2K 1/10W(1608)
R122	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R123	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R124	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R125	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R126	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R127	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R128	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R129	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R130	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R131	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R132	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R133	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R134	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R135	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R136	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R137	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R138	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R139	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R141	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R142	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R143	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R144	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R145	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R146	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R147	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R148	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R149	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R150	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R151	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R152	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R153	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R155	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R157	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R158	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R159	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R160	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R161	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R162	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R163	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R164	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R165	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R166	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R168	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R169	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R170	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R171	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R172	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R173	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R174	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R175	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R176	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R177	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)

(PA-317 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
R178	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R179	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R180	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R181	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R182	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R183	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R184	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R187	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R188	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R189	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R190	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R204	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R205	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R206	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R207	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R209	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R210	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R211	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R212	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R213	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005
R214	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005
R215	1-218-849-11	s	RESISTOR,CHIP 1.2K 1/10W(1608)
R216	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R217	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R218	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R219	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R220	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R221	1-218-849-11	s	RESISTOR,CHIP 1.2K 1/10W(1608)
R222	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R223	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R224	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R225	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R226	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R227	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R228	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R229	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R230	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R231	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R232	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R233	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R234	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R235	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R236	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R237	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R238	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R239	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R241	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R242	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R243	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R244	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R245	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R246	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R247	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R248	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R249	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R250	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R251	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R252	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R253	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)

(PA-317 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
R255	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R257	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R258	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R259	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R260	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R261	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R262	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R263	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R264	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R265	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R266	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R268	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R269	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R270	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R271	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R272	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R273	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R274	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R275	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R276	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R277	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R278	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R279	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R280	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R281	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R282	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R283	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R284	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R287	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R288	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R289	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R290	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R304	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R305	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R306	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R307	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R309	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R310	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R311	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R312	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R313	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005
R314	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005
R315	1-218-849-11	s	RESISTOR,CHIP 1.2K 1/10W(1608)
R316	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R317	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R318	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R319	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R320	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R321	1-218-849-11	s	RESISTOR,CHIP 1.2K 1/10W(1608)
R322	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R323	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R324	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R325	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R326	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R327	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R328	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R329	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R330	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R331	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)

(PA-317 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
R332	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R333	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R334	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R335	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R336	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R337	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R338	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R339	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R341	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R342	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R343	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R344	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R345	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R346	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R347	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R348	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R349	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R350	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R351	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R352	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R353	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R355	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R357	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R358	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R359	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R360	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R361	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R362	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R363	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R364	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R365	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R366	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R368	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R369	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R370	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R371	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R372	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R373	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R374	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R375	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R376	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R377	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R378	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R379	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R380	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R381	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R382	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R383	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R384	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R387	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R388	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R389	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R390	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R401	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R402	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R403	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R404	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R405	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R406	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)

(PA-317 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
R407	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R408	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R409	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R410	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R411	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R412	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R413	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R414	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R415	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R416	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R417	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R418	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R419	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R420	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R421	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R422	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R423	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R424	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R425	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R426	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R427	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R428	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R429	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R430	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R431	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R432	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R433	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R435	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R436	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R437	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R438	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R439	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R440	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R441	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R442	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R443	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R444	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R445	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R446	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R447	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R448	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R449	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R450	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R451	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R452	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R453	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R454	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R455	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R456	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R457	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R458	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R459	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R460	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R461	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R462	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R463	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R464	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R465	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R466	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)

(PA-317 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
R467	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R468	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R469	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R470	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R471	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R472	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R473	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R474	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R475	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R476	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R477	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R478	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R479	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R480	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R481	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R482	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R483	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R484	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R485	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R486	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R487	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R488	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R489	1-208-905-11	s	RESISTOR, CHIP 5.6K (1005)
R490	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R491	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R492	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R493	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R494	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R495	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R496	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R497	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R498	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R499	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R500	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R501	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R502	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R503	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R504	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R505	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R506	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R507	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R508	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R509	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R510	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R511	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R512	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
RV101	1-227-405-21	s	RES, ADJ, CERMET 220
RV102	1-227-405-21	s	RES, ADJ, CERMET 220
RV103	1-227-405-21	s	RES, ADJ, CERMET 220
RV201	1-227-405-21	s	RES, ADJ, CERMET 220
RV202	1-227-405-21	s	RES, ADJ, CERMET 220
RV203	1-227-405-21	s	RES, ADJ, CERMET 220
RV301	1-227-405-21	s	RES, ADJ, CERMET 220
RV302	1-227-405-21	s	RES, ADJ, CERMET 220
RV303	1-227-405-21	s	RES, ADJ, CERMET 220

PA-317C BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1175-915-A	s	MOUNTED CIRCUIT BOARD, PA-317CG
C102	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C106	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C107	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C108	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C109	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C110	1-135-646-91	s	CAP, CHIP FILM 1MF
C111	1-135-646-91	s	CAP, CHIP FILM 1MF
C114	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C115	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C116	1-165-908-91	s	CAP, CERAMIC 1000000PF B 1608
C117	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C118	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C120	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C124	1-165-908-91	s	CAP, CERAMIC 1000000PF B 1608
C126	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C128	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C130	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C132	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C135	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C138	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C139	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C141	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C145	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C146	1-165-908-91	s	CAP, CERAMIC 1000000PF B 1608
C147	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C148	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C149	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C150	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C151	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C159	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C161	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C163	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C164	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C167	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C169	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C170	1-165-908-91	s	CAP, CERAMIC 1000000PF B 1608
C173	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C174	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C177	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C182	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C183	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C184	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C185	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C190	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C193	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C195	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C196	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C202	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C206	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C207	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C208	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C209	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C210	1-135-646-91	s	CAP, CHIP FILM 1MF
C211	1-135-646-91	s	CAP, CHIP FILM 1MF
C214	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C215	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C216	1-165-908-91	s	CAP, CERAMIC 1000000PF B 1608

(PA-317C BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C217	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C218	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C220	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C224	1-165-908-91	s	CAP, CERAMIC 1000000PF B 1608
C226	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C228	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C230	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C232	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C235	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C238	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C239	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C241	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C245	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C246	1-165-908-91	s	CAP, CERAMIC 1000000PF B 1608
C247	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C248	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C249	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C250	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C251	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C259	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C261	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C263	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C264	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C267	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C269	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C270	1-165-908-91	s	CAP, CERAMIC 1000000PF B 1608
C273	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C274	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C277	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C282	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C283	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C284	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C285	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C290	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C293	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C295	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C296	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C302	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C306	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C307	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C308	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C309	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C310	1-135-646-91	s	CAP, CHIP FILM 1MF
C311	1-135-646-91	s	CAP, CHIP FILM 1MF
C314	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C315	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C316	1-165-908-91	s	CAP, CERAMIC 1000000PF B 1608
C317	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C318	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C320	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C322	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C324	1-165-908-91	s	CAP, CERAMIC 1000000PF B 1608
C326	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C328	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C330	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C332	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C335	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C338	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C339	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(PA-317C BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C341	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C345	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C346	1-165-908-91	s	CAP, CERAMIC 1000000PF B 1608
C347	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C348	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C349	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C350	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C351	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C359	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C361	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C363	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C364	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C367	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C369	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C370	1-165-908-91	s	CAP, CERAMIC 1000000PF B 1608
C373	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C374	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C377	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C382	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C383	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C384	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C385	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C390	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C393	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C395	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C396	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C401	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C402	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C403	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C404	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C405	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C406	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C407	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C408	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C409	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C410	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C411	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C412	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C413	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C414	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C415	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C416	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C417	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C418	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C419	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C420	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C423	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C424	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C425	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C426	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C427	1-126-395-21	s	CAP, CHIP ELECT 22MF (5X5.7)
C428	1-126-391-21	s	CAP, CHIP ELECT 47MF (5X5.7)
C429	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C430	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C431	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C432	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C433	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C434	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C435	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(PA-317C BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C436	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C437	1-165-903-21	s	CAP, ELECT 120MF (6.3X6)
C438	1-165-903-21	s	CAP, ELECT 120MF (6.3X6)
C439	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C440	1-126-395-21	s	CAP, CHIP ELECT 22MF (5X5.7)
C441	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C442	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C443	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C444	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C445	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C446	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C447	1-165-903-21	s	CAP, ELECT 120MF (6.3X6)
C452	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C453	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C464	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
CN101	1-785-900-21	s	CONNECTOR 5P
CN201	1-785-900-21	s	CONNECTOR 5P
CN301	1-785-900-21	s	CONNECTOR 5P
CN401	1-770-454-21	o	CONNECTOR, BOARD TO BOARD 70P
CN402	1-779-522-31	s	CONNECTOR, FFC/FPC(ZIF) AN 40P
E401	1-535-877-22	s	CHIP, CHECKER
FL102	1-813-541-11	s	FILTER, LOW PASS
FL202	1-813-541-11	s	FILTER, LOW PASS
FL302	1-813-541-11	s	FILTER, LOW PASS
IC101	6-706-863-01	s	IC LMH6732MFX/NOPB
IC102	6-706-863-01	s	IC LMH6732MFX/NOPB
IC106	8-753-261-02	s	IC CXA3648AR-T4
IC108	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC111	6-706-863-01	s	IC LMH6732MFX/NOPB
IC201	6-706-863-01	s	IC LMH6732MFX/NOPB
IC202	6-706-863-01	s	IC LMH6732MFX/NOPB
IC206	8-753-261-02	s	IC CXA3648AR-T4
IC208	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC211	6-706-863-01	s	IC LMH6732MFX/NOPB
IC301	6-706-863-01	s	IC LMH6732MFX/NOPB
IC302	6-706-863-01	s	IC LMH6732MFX/NOPB
IC306	8-753-261-02	s	IC CXA3648AR-T4
IC308	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC311	6-706-863-01	s	IC LMH6732MFX/NOPB
IC401	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC402	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC403	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC404	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC405	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC406	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC407	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC408	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC409	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC410	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC411	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC412	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC413	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC414	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC415	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC416	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC417	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC418	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC419	8-759-685-34	s	IC M62352AGP-D60Q

(PA-317C BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC420	8-759-685-34	s	IC M62352AGP-D60Q
IC421	6-704-976-01	s	IC ADR381ARTZ-REEL7
IC422	8-759-685-34	s	IC M62352AGP-D60Q
IC423	8-759-685-34	s	IC M62352AGP-D60Q
IC424	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC425	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC426	8-759-327-01	s	IC NJM062V(TE2)
IC427	8-759-327-01	s	IC NJM062V(TE2)
L101	1-414-751-91	s	INDUCTOR 1.0UH
L201	1-414-751-91	s	INDUCTOR 1.0UH
L301	1-414-751-91	s	INDUCTOR 1.0UH
L401	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L402	1-414-394-41	s	INDUCTOR (SMD) 2.2UH
L403	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L404	1-416-344-21	s	COIL, CHOKE 10UH
Q401	8-729-144-81	s	TRANSISTOR 2SC4176T1B33B34B35
Q402	8-729-140-86	s	TRANSISTOR 2SA1610-T1Y34
Q403	8-729-230-27	s	TRANSISTOR 2SA1213Y-TE12L
Q404	8-729-209-77	s	TRANSISTOR 2SC2873Y-TE12L
Q405	8-729-144-81	s	TRANSISTOR 2SC4176T1B33B34B35
Q406	8-729-230-27	s	TRANSISTOR 2SA1213Y-TE12L
R102	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R104	1-218-941-11	s	RES, CHIP 100 (1005)
R105	1-218-941-11	s	RES, CHIP 100 (1005)
R106	1-218-941-11	s	RES, CHIP 100 (1005)
R107	1-218-941-11	s	RES, CHIP 100 (1005)
R109	1-208-683-11	s	RES, CHIP 1.0K (1005)
R110	1-208-683-11	s	RES, CHIP 1.0K (1005)
R111	1-208-935-81	s	RES, CHIP 100K (1005)
R112	1-208-935-81	s	RES, CHIP 100K (1005)
R113	1-208-891-81	s	RES, CHIP 1.5K (1005)
R114	1-208-891-81	s	RES, CHIP 1.5K (1005)
R115	1-208-889-81	s	RES, CHIP 1.2K (1005)
R116	1-208-699-11	s	RES, CHIP 4.7K (1005)
R117	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R118	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R119	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R120	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R126	1-218-945-11	s	RES, CHIP 220 (1005)
R128	1-208-855-81	s	RES, CHIP 47 (1005)
R130	1-208-855-81	s	RES, CHIP 47 (1005)
R131	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R133	1-208-855-81	s	RES, CHIP 47 (1005)
R134	1-208-855-81	s	RES, CHIP 47 (1005)
R136	1-208-855-81	s	RES, CHIP 47 (1005)
R137	1-208-855-81	s	RES, CHIP 47 (1005)
R138	1-208-855-81	s	RES, CHIP 47 (1005)
R140	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R141	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R142	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R145	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R147	1-208-911-81	s	RES, CHIP 10K (1005)
R148	1-208-911-81	s	RES, CHIP 10K (1005)
R151	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R153	1-208-879-81	s	RES, CHIP 470 (1005)
R154	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R157	1-208-855-81	s	RES, CHIP 47 (1005)

(PA-317C BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R159	1-218-945-11	s	RES, CHIP 220 (1005)
R161	1-208-683-11	s	RES, CHIP 1.0K (1005)
R163	1-208-879-81	s	RES, CHIP 470 (1005)
R168	1-208-683-11	s	RES, CHIP 1.0K (1005)
R170	1-208-683-11	s	RES, CHIP 1.0K (1005)
R173	1-208-683-11	s	RES, CHIP 1.0K (1005)
R176	1-208-927-81	s	RES, CHIP 47K (1005)
R178	1-208-683-11	s	RES, CHIP 1.0K (1005)
R181	1-218-941-11	s	RES, CHIP 100 (1005)
R182	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R184	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R185	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R187	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R189	1-208-865-81	s	RES, CHIP 120 (1005)
R190	1-208-865-81	s	RES, CHIP 120 (1005)
R202	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R204	1-218-941-11	s	RES, CHIP 100 (1005)
R205	1-218-941-11	s	RES, CHIP 100 (1005)
R206	1-218-941-11	s	RES, CHIP 100 (1005)
R207	1-218-941-11	s	RES, CHIP 100 (1005)
R209	1-208-683-11	s	RES, CHIP 1.0K (1005)
R210	1-208-683-11	s	RES, CHIP 1.0K (1005)
R211	1-208-935-81	s	RES, CHIP 100K (1005)
R212	1-208-935-81	s	RES, CHIP 100K (1005)
R213	1-208-891-81	s	RES, CHIP 1.5K (1005)
R214	1-208-891-81	s	RES, CHIP 1.5K (1005)
R215	1-208-889-81	s	RES, CHIP 1.2K (1005)
R216	1-208-699-11	s	RES, CHIP 4.7K (1005)
R217	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R218	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R219	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R220	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R226	1-218-945-11	s	RES, CHIP 220 (1005)
R228	1-208-855-81	s	RES, CHIP 47 (1005)
R230	1-208-855-81	s	RES, CHIP 47 (1005)
R231	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R233	1-208-855-81	s	RES, CHIP 47 (1005)
R234	1-208-855-81	s	RES, CHIP 47 (1005)
R236	1-208-855-81	s	RES, CHIP 47 (1005)
R237	1-208-855-81	s	RES, CHIP 47 (1005)
R238	1-208-855-81	s	RES, CHIP 47 (1005)
R240	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R241	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R242	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R245	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R247	1-208-911-81	s	RES, CHIP 10K (1005)
R248	1-208-911-81	s	RES, CHIP 10K (1005)
R251	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R253	1-208-879-81	s	RES, CHIP 470 (1005)
R254	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R257	1-208-855-81	s	RES, CHIP 47 (1005)
R259	1-218-945-11	s	RES, CHIP 220 (1005)
R261	1-208-683-11	s	RES, CHIP 1.0K (1005)
R263	1-208-879-81	s	RES, CHIP 470 (1005)
R268	1-208-683-11	s	RES, CHIP 1.0K (1005)
R270	1-208-683-11	s	RES, CHIP 1.0K (1005)
R273	1-208-683-11	s	RES, CHIP 1.0K (1005)
R276	1-208-927-81	s	RES, CHIP 47K (1005)
R278	1-208-683-11	s	RES, CHIP 1.0K (1005)

(PA-317C BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R281	1-218-941-11	s	RES, CHIP 100 (1005)
R282	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R284	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R285	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R287	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R289	1-208-865-81	s	RES, CHIP 120 (1005)
R290	1-208-865-81	s	RES, CHIP 120 (1005)
R302	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R304	1-218-941-11	s	RES, CHIP 100 (1005)
R305	1-218-941-11	s	RES, CHIP 100 (1005)
R306	1-218-941-11	s	RES, CHIP 100 (1005)
R307	1-218-941-11	s	RES, CHIP 100 (1005)
R309	1-208-683-11	s	RES, CHIP 1.0K (1005)
R310	1-208-683-11	s	RES, CHIP 1.0K (1005)
R311	1-208-935-81	s	RES, CHIP 100K (1005)
R312	1-208-935-81	s	RES, CHIP 100K (1005)
R313	1-208-891-81	s	RES, CHIP 1.5K (1005)
R314	1-208-891-81	s	RES, CHIP 1.5K (1005)
R315	1-208-889-81	s	RES, CHIP 1.2K (1005)
R316	1-208-699-11	s	RES, CHIP 4.7K (1005)
R317	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R318	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R319	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R320	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R326	1-218-945-11	s	RES, CHIP 220 (1005)
R328	1-208-855-81	s	RES, CHIP 47 (1005)
R330	1-208-855-81	s	RES, CHIP 47 (1005)
R331	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R333	1-208-855-81	s	RES, CHIP 47 (1005)
R334	1-208-855-81	s	RES, CHIP 47 (1005)
R336	1-208-855-81	s	RES, CHIP 47 (1005)
R337	1-208-855-81	s	RES, CHIP 47 (1005)
R338	1-208-855-81	s	RES, CHIP 47 (1005)
R340	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R341	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R342	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R345	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R347	1-208-911-81	s	RES, CHIP 10K (1005)
R348	1-208-911-81	s	RES, CHIP 10K (1005)
R351	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R353	1-208-879-81	s	RES, CHIP 470 (1005)
R354	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R357	1-208-855-81	s	RES, CHIP 47 (1005)
R359	1-218-945-11	s	RES, CHIP 220 (1005)
R361	1-208-683-11	s	RES, CHIP 1.0K (1005)
R363	1-208-879-81	s	RES, CHIP 470 (1005)
R368	1-208-683-11	s	RES, CHIP 1.0K (1005)
R370	1-208-683-11	s	RES, CHIP 1.0K (1005)
R373	1-208-683-11	s	RES, CHIP 1.0K (1005)
R376	1-208-927-81	s	RES, CHIP 47K (1005)
R378	1-208-683-11	s	RES, CHIP 1.0K (1005)
R381	1-218-941-11	s	RES, CHIP 100 (1005)
R382	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R384	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R385	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R387	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R389	1-208-865-81	s	RES, CHIP 120 (1005)
R390	1-208-865-81	s	RES, CHIP 120 (1005)
R401	1-208-643-11	s	RES, CHIP 22 (1005)

(PA-317C BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R402	1-208-643-11	s	RES, CHIP 22 (1005)
R403	1-208-643-11	s	RES, CHIP 22 (1005)
R404	1-208-643-11	s	RES, CHIP 22 (1005)
R405	1-208-643-11	s	RES, CHIP 22 (1005)
R406	1-208-643-11	s	RES, CHIP 22 (1005)
R407	1-208-643-11	s	RES, CHIP 22 (1005)
R408	1-208-643-11	s	RES, CHIP 22 (1005)
R409	1-208-643-11	s	RES, CHIP 22 (1005)
R410	1-208-643-11	s	RES, CHIP 22 (1005)
R411	1-208-643-11	s	RES, CHIP 22 (1005)
R412	1-208-643-11	s	RES, CHIP 22 (1005)
R413	1-208-643-11	s	RES, CHIP 22 (1005)
R414	1-208-643-11	s	RES, CHIP 22 (1005)
R415	1-208-643-11	s	RES, CHIP 22 (1005)
R416	1-208-643-11	s	RES, CHIP 22 (1005)
R417	1-208-643-11	s	RES, CHIP 22 (1005)
R418	1-208-643-11	s	RES, CHIP 22 (1005)
R419	1-218-941-11	s	RES, CHIP 100 (1005)
R420	1-218-941-11	s	RES, CHIP 100 (1005)
R421	1-218-941-11	s	RES, CHIP 100 (1005)
R422	1-218-941-11	s	RES, CHIP 100 (1005)
R423	1-218-945-11	s	RES, CHIP 220 (1005)
R424	1-208-683-11	s	RES, CHIP 1.0K (1005)
R425	1-208-683-11	s	RES, CHIP 1.0K (1005)
R426	1-208-683-11	s	RES, CHIP 1.0K (1005)
R427	1-208-683-11	s	RES, CHIP 1.0K (1005)
R428	1-208-683-11	s	RES, CHIP 1.0K (1005)
R429	1-208-683-11	s	RES, CHIP 1.0K (1005)
R430	1-208-683-11	s	RES, CHIP 1.0K (1005)
R431	1-208-683-11	s	RES, CHIP 1.0K (1005)
R432	1-208-683-11	s	RES, CHIP 1.0K (1005)
R433	1-208-683-11	s	RES, CHIP 1.0K (1005)
R435	1-218-945-11	s	RES, CHIP 220 (1005)
R436	1-218-945-11	s	RES, CHIP 220 (1005)
R437	1-218-941-11	s	RES, CHIP 100 (1005)
R438	1-208-683-11	s	RES, CHIP 1.0K (1005)
R439	1-208-683-11	s	RES, CHIP 1.0K (1005)
R440	1-208-683-11	s	RES, CHIP 1.0K (1005)
R441	1-208-683-11	s	RES, CHIP 1.0K (1005)
R445	1-208-683-11	s	RES, CHIP 1.0K (1005)
R446	1-208-683-11	s	RES, CHIP 1.0K (1005)
R447	1-208-683-11	s	RES, CHIP 1.0K (1005)
R448	1-208-683-11	s	RES, CHIP 1.0K (1005)
R449	1-208-683-11	s	RES, CHIP 1.0K (1005)
R450	1-208-927-81	s	RES, CHIP 47K (1005)
R451	1-208-927-81	s	RES, CHIP 47K (1005)
R452	1-208-911-81	s	RES, CHIP 10K (1005)
R453	1-208-699-11	s	RES, CHIP 4.7K (1005)
R454	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R455	1-208-699-11	s	RES, CHIP 4.7K (1005)
R456	1-218-941-11	s	RES, CHIP 100 (1005)
R457	1-208-683-11	s	RES, CHIP 1.0K (1005)
R458	1-208-683-11	s	RES, CHIP 1.0K (1005)
R459	1-208-683-11	s	RES, CHIP 1.0K (1005)
R460	1-208-683-11	s	RES, CHIP 1.0K (1005)
R464	1-208-683-11	s	RES, CHIP 1.0K (1005)
R465	1-208-683-11	s	RES, CHIP 1.0K (1005)
R466	1-208-683-11	s	RES, CHIP 1.0K (1005)
R467	1-208-683-11	s	RES, CHIP 1.0K (1005)

(PA-317C BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R468	1-208-683-11	s	RES, CHIP 1.0K (1005)
R469	1-218-941-11	s	RES, CHIP 100 (1005)
R470	1-218-941-11	s	RES, CHIP 100 (1005)
R471	1-208-683-11	s	RES, CHIP 1.0K (1005)
R472	1-218-945-11	s	RES, CHIP 220 (1005)
R473	1-218-945-11	s	RES, CHIP 220 (1005)
R474	1-208-683-11	s	RES, CHIP 1.0K (1005)
R475	1-218-941-11	s	RES, CHIP 100 (1005)
R476	1-208-911-81	s	RES, CHIP 10K (1005)
R477	1-208-683-11	s	RES, CHIP 1.0K (1005)
R478	1-208-683-11	s	RES, CHIP 1.0K (1005)
R479	1-208-683-11	s	RES, CHIP 1.0K (1005)
R480	1-208-683-11	s	RES, CHIP 1.0K (1005)
R484	1-208-683-11	s	RES, CHIP 1.0K (1005)
R485	1-208-683-11	s	RES, CHIP 1.0K (1005)
R486	1-208-683-11	s	RES, CHIP 1.0K (1005)
R487	1-208-683-11	s	RES, CHIP 1.0K (1005)
R488	1-208-683-11	s	RES, CHIP 1.0K (1005)
R489	1-208-905-81	s	RES, CHIP 5.6K (1005)
R490	1-218-945-11	s	RES, CHIP 220 (1005)
R491	1-208-699-11	s	RES, CHIP 4.7K (1005)
R492	1-218-941-11	s	RES, CHIP 100 (1005)
R493	1-218-945-11	s	RES, CHIP 220 (1005)
R494	1-208-643-11	s	RES, CHIP 22 (1005)
R495	1-208-643-11	s	RES, CHIP 22 (1005)
R496	1-208-643-11	s	RES, CHIP 22 (1005)
R497	1-208-643-11	s	RES, CHIP 22 (1005)
R498	1-208-643-11	s	RES, CHIP 22 (1005)
R499	1-208-643-11	s	RES, CHIP 22 (1005)
R500	1-208-643-11	s	RES, CHIP 22 (1005)
R501	1-208-643-11	s	RES, CHIP 22 (1005)
R502	1-208-643-11	s	RES, CHIP 22 (1005)
R503	1-208-643-11	s	RES, CHIP 22 (1005)
R504	1-208-643-11	s	RES, CHIP 22 (1005)
R505	1-208-643-11	s	RES, CHIP 22 (1005)
R506	1-208-643-11	s	RES, CHIP 22 (1005)
R507	1-208-643-11	s	RES, CHIP 22 (1005)
R508	1-208-643-11	s	RES, CHIP 22 (1005)
RV102	1-227-405-21	s	RES, ADJ, CERMET 220
RV202	1-227-405-21	s	RES, ADJ, CERMET 220
RV302	1-227-405-21	s	RES, ADJ, CERMET 220

PA-327 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1159-994-A	s	MOUNTED CIRCUIT BOARD, PA-327G (GOLD)
	A-1099-203-A	s	MOUNTED CIRCUIT BOARD, PA-327 (SILVER)
C102	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C103	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C104	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C105	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C106	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C107	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C108	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C109	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C110	1-135-646-11	s	CAPACITOR,CHIP FILM 1MF 16V
C111	1-135-646-11	s	CAPACITOR,CHIP FILM 1MF 16V
C112	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C113	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C114	1-165-908-11	s	CAP, CERAMIC 1MF B 1608
C115	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C116	1-165-908-11	s	CAP, CERAMIC 1MF B 1608
C117	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C118	1-165-871-11	s	CAPACITOR,ELECT 22MF
C119	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C120	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C121	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C122	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C123	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C124	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C125	1-164-845-11	s	CAPACITOR,CERAMIC 5PF/16V(1005
C126	1-165-908-11	s	CAP, CERAMIC 1MF B 1608
C127	1-165-871-11	s	CAPACITOR,ELECT 22MF
C128	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C129	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C130	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C131	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C132	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C133	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C134	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C135	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C136	1-165-871-11	s	CAPACITOR,ELECT 22MF
C137	1-165-908-11	s	CAP, CERAMIC 1MF B 1608
C138	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C139	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C140	1-164-845-11	s	CAPACITOR,CERAMIC 5PF/16V(1005
C142	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C143	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C144	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C145	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C146	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C147	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C148	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C149	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C150	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C151	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C202	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C203	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C204	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C205	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225

(PA-327 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C206	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C207	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C208	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C209	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C210	1-135-646-11	s	CAPACITOR,CHIP FILM 1MF 16V
C211	1-135-646-11	s	CAPACITOR,CHIP FILM 1MF 16V
C212	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C213	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C214	1-165-908-11	s	CAP, CERAMIC 1MF B 1608
C215	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C216	1-165-908-11	s	CAP, CERAMIC 1MF B 1608
C217	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C218	1-165-871-11	s	CAPACITOR,ELECT 22MF
C219	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C220	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C221	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C222	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C223	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C224	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C225	1-164-845-11	s	CAPACITOR,CERAMIC 5PF/16V(1005
C226	1-165-908-11	s	CAP, CERAMIC 1MF B 1608
C227	1-165-871-11	s	CAPACITOR,ELECT 22MF
C228	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C229	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C230	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C231	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C232	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C233	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C234	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C235	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C236	1-165-871-11	s	CAPACITOR,ELECT 22MF
C237	1-165-908-11	s	CAP, CERAMIC 1MF B 1608
C238	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C239	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C240	1-164-845-11	s	CAPACITOR,CERAMIC 5PF/16V(1005
C242	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C243	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C244	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C245	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C246	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C247	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C248	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C249	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C250	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C251	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C302	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C303	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C304	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C305	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C306	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C307	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C308	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C309	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C310	1-135-646-11	s	CAPACITOR,CHIP FILM 1MF 16V
C311	1-135-646-11	s	CAPACITOR,CHIP FILM 1MF 16V
C312	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C313	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C314	1-165-908-11	s	CAP, CERAMIC 1MF B 1608
C315	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V

(PA-327 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C316	1-165-908-11	s	CAP, CERAMIC 1MF B 1608
C317	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C318	1-165-871-11	s	CAPACITOR,ELECT 22MF
C319	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C320	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C321	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C322	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C323	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C324	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C325	1-164-845-11	s	CAPACITOR,CERAMIC 5PF/16V(1005
C326	1-165-908-11	s	CAP, CERAMIC 1MF B 1608
C327	1-165-871-11	s	CAPACITOR,ELECT 22MF
C328	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C329	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C330	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C331	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C332	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C333	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C334	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C335	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C336	1-165-871-11	s	CAPACITOR,ELECT 22MF
C337	1-165-908-11	s	CAP, CERAMIC 1MF B 1608
C338	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C339	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C340	1-164-845-11	s	CAPACITOR,CERAMIC 5PF/16V(1005
C342	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C343	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C344	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C345	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C346	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C347	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C348	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C349	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C350	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C351	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C401	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C402	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C403	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C404	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C405	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C406	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C407	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C408	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C409	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C410	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C411	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C412	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C413	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C414	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C415	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C416	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C417	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C418	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C419	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C420	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C423	1-165-884-91	s	CAPACITOR, CERAMIC 2.2MF(1608)
C424	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C425	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C426	1-165-884-91	s	CAPACITOR, CERAMIC 2.2MF(1608)

(PA-327 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C427	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C428	1-126-391-11	s	CAPACITOR ELECT 47MF/6.3V(105)
C429	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C430	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C431	1-165-884-91	s	CAPACITOR, CERAMIC 2.2MF(1608)
C432	1-165-884-91	s	CAPACITOR, CERAMIC 2.2MF(1608)
C433	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C434	1-165-884-91	s	CAPACITOR, CERAMIC 2.2MF(1608)
C435	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C436	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C437	1-165-881-21	s	CAPACITOR, ELECT 120MF(6.3X6)
C438	1-165-881-21	s	CAPACITOR, ELECT 120MF(6.3X6)
C439	1-165-884-91	s	CAPACITOR, CERAMIC 2.2MF(1608)
C440	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C441	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C442	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C443	1-165-884-91	s	CAPACITOR, CERAMIC 2.2MF(1608)
C444	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C445	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C446	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C447	1-165-881-21	s	CAPACITOR, ELECT 120MF(6.3X6)
CN101	1-785-900-11	s	CONNECTOR
CN201	1-785-900-11	s	CONNECTOR
CN301	1-785-900-11	s	CONNECTOR
CN401	1-770-454-21	o	CONNECTOR, BOARD TO BOARD 70P
CN402	1-779-522-31	s	CONNECTOR, FFC/FPC(ZIF) AN 40P (GOLD)
E401	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
FL101	1-813-541-11	s	FILTER, LOW PASS
FL201	1-813-542-11	s	FILTER, LOW PASS
FL301	1-813-541-11	s	FILTER, LOW PASS
IC101	6-706-863-01	s	IC LMH6732MFX/NOPB
IC102	6-706-863-01	s	IC LMH6732MFX/NOPB
IC105	8-759-561-46	s	IC AD8014ART-REEL7
IC106	6-706-863-01	s	IC LMH6732MFX/NOPB
IC201	6-706-863-01	s	IC LMH6732MFX/NOPB
IC202	6-706-863-01	s	IC LMH6732MFX/NOPB
IC205	8-759-561-46	s	IC AD8014ART-REEL7
IC206	6-706-863-01	s	IC LMH6732MFX/NOPB
IC301	6-706-863-01	s	IC LMH6732MFX/NOPB
IC302	6-706-863-01	s	IC LMH6732MFX/NOPB
IC305	8-759-561-46	s	IC AD8014ART-REEL7
IC306	6-706-863-01	s	IC LMH6732MFX/NOPB
IC401	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC402	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC403	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC404	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC405	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC406	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC407	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC408	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC409	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC410	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC411	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC412	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC413	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC414	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC415	8-759-592-47	s	IC TC7SZ08FU(TE85R)

(PA-327 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC416	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC417	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC418	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC419	8-759-685-33	s	IC BU2500FV-E2
IC420	8-759-685-33	s	IC BU2500FV-E2
IC421	6-704-976-01	s	IC ADR381ART-REEL7
IC422	8-759-685-33	s	IC BU2500FV-E2
IC423	8-759-685-33	s	IC BU2500FV-E2
IC424	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC425	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC426	8-759-327-01	s	IC NJM062V-TE2
IC427	8-759-327-01	s	IC NJM062V-TE2
L101	1-414-751-11	s	INDUCTOR 1.0UH
L201	1-414-751-11	s	INDUCTOR 1.0UH
L301	1-414-751-11	s	INDUCTOR 1.0UH
L401	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L402	1-414-394-11	s	INDUCTOR (SMD) 2.2UH
L403	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L404	1-416-344-11	s	COIL, CHOKE 10UH
Q401	8-729-143-13	s	TRANSISTOR 2SC4176-B34
Q402	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q403	8-729-230-27	s	TRANSISTOR 2SA1213Y-TE12L
Q404	8-729-807-51	s	TRANSISTOR 2SD1623-S
Q405	8-729-143-13	s	TRANSISTOR 2SC4176-B34
Q406	8-729-230-27	s	TRANSISTOR 2SA1213Y-TE12L
R104	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R105	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R106	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R107	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R109	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R110	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R111	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R112	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R113	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R114	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R115	1-218-849-11	s	RESISTOR,CHIP 1.2K 1/10W(1608)
R116	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R117	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R118	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R119	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R120	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R121	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R122	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R123	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R124	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R125	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R126	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R127	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R128	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R129	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R130	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R131	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R132	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R133	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R134	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R135	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R136	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)

(PA-327 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R137	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R138	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R139	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R140	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R141	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R142	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R143	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R144	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R145	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R146	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R147	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R148	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R149	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R204	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R205	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R206	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R207	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R209	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R210	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R211	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R212	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R213	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R214	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R215	1-218-849-11	s	RESISTOR,CHIP 1.2K 1/10W(1608)
R216	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R217	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R218	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R219	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R220	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R221	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R222	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R223	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R224	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R225	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R226	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R227	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R228	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R229	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R230	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R231	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R232	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R233	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R234	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R235	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R236	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R237	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R238	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R239	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R240	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R241	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R242	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R243	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R244	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R245	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R246	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R247	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R248	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R249	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R304	1-208-911-11	s	RESISTOR, CHIP 10K (1005)

(PA-327 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R305	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R306	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R307	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R309	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R310	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R311	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R312	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R313	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R314	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R315	1-218-849-11	s	RESISTOR,CHIP 1.2K 1/10W(1608)
R316	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R317	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R318	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R319	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R320	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R321	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R322	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R323	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R324	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R325	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R326	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R327	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R328	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R329	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R330	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R331	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R332	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R333	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R334	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R335	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R336	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R337	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R338	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R339	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R340	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R341	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R342	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R343	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R344	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R345	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R346	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R347	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R348	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R349	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R401	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R402	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R403	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R404	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R405	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R406	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R407	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R408	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R409	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R410	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R411	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R412	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R413	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R414	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R415	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)

(PA-327 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R416	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R417	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R418	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R419	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R420	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R421	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R422	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R423	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R424	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R425	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R426	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R427	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R428	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R429	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R430	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R431	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R432	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R433	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R434	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R435	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R436	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R437	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R438	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R439	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R440	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R441	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R442	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R443	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R444	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R445	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R446	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R447	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R448	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R449	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R450	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R451	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R452	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R453	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R454	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R455	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R456	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R457	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R458	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R459	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R460	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R461	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R462	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R463	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R464	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R465	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R466	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R467	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R468	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R469	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R470	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R471	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R472	1-208-905-11	s	RESISTOR, CHIP 5.6K (1005)
R473	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R474	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)

(PA-327 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R475	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R476	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R477	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R478	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R479	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R480	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R481	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R482	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R483	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R484	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R485	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R486	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R487	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R488	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R489	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R490	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R491	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R492	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R493	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
RV101	1-227-405-21	s	RES, ADJ, CERMET 220
RV201	1-227-405-21	s	RES, ADJ, CERMET 220
RV301	1-227-405-21	s	RES, ADJ, CERMET 220

SDI-84 BOARD
---

*1: [Board No. suffix 12]
*2: [Board No. suffix 13-]

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1099-252-A	s	MOUNTED CIRCUIT BOARD, SDI-84
C101	1-100-620-91	s	CAPACITOR, CHIP 47MF(3225)
C104	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C107	1-165-872-21	s	CAPACITOR,SOLID ELECT 47MF
C108 *1	1-208-691-11	s	METAL CHIP 2.2K 0.5% 1/16W
C109	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C115	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C116	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C119	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C120	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C122	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C123	1-100-620-91	s	CAPACITOR, CHIP 47MF(3225)
C124	1-100-620-91	s	CAPACITOR, CHIP 47MF(3225)
C125	1-126-400-11	s	CAPACITOR ELECT 22MF/35V(CHIP)
C126	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C127	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C130	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C132	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C133	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C134	1-100-620-91	s	CAPACITOR, CHIP 47MF(3225)
C135	1-100-620-91	s	CAPACITOR, CHIP 47MF(3225)
C136	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C137	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C138	1-119-923-11	s	CAPACITOR,CHIP CERAMIC 0.047MF
C141	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C142	1-119-923-11	s	CAPACITOR,CHIP CERAMIC 0.047MF
C143	1-100-620-91	s	CAPACITOR, CHIP 47MF(3225)
C144	1-100-620-91	s	CAPACITOR, CHIP 47MF(3225)
C145	1-107-819-11	s	CAP,CERAMIC 22000PF/16V(1005)
C146	1-164-936-11	s	CAPACITOR,CHIP CERAMIC 680PF
C147	1-100-620-91	s	CAPACITOR, CHIP 47MF(3225)
C148	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C149	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C150	1-100-620-91	s	CAPACITOR, CHIP 47MF(3225)
C151	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C152	1-119-923-11	s	CAPACITOR,CHIP CERAMIC 0.047MF
C155	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C156	1-119-923-11	s	CAPACITOR,CHIP CERAMIC 0.047MF
C157	1-100-620-91	s	CAPACITOR, CHIP 47MF(3225)
C158	1-100-620-91	s	CAPACITOR, CHIP 47MF(3225)
C159	1-107-819-11	s	CAP,CERAMIC 22000PF/16V(1005)
C160	1-164-936-11	s	CAPACITOR,CHIP CERAMIC 680PF
C161	1-100-620-91	s	CAPACITOR, CHIP 47MF(3225)
C162	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C163 *1	1-100-506-91	s	CERAMIC CHIP 1UF 20% 6.3V
C164	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C165	1-100-620-91	s	CAPACITOR, CHIP 47MF(3225)
C166	1-128-414-11	s	CAPACITOR ELECT 220MF/6.3V
C167	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C168	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C169	1-128-414-11	s	CAPACITOR ELECT 220MF/6.3V
C170	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C171	1-164-850-11	s	CAPACITOR,CHIP CERAMIC 10PF/50
C172	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C173	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C174	1-165-872-21	s	CAPACITOR,SOLID ELECT 47MF

(SDI-84 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C175	1-100-507-91	s	CAPACITOR,CERAMIC4.7MF C(1608)
C176	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C178	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C179	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C180	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C203	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C204	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C205	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C206	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C208	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C209	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C210	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C211	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C212	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C213	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C214	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C215	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C216	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C218	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C219	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C220	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C221	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C222	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C223	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C224	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C225	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C226	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C227	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C228	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C229	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C230	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C231	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C232	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C233	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C234	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C235	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C236	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C237	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C238	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C239	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C240	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C243	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C244	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C245	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C246	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C247	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C248	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C249	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C250	1-100-507-91	s	CAPACITOR,CERAMIC4.7MF C(1608)
C251	1-100-507-91	s	CAPACITOR,CERAMIC4.7MF C(1608)
C252	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C253	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C254	1-100-507-91	s	CAPACITOR,CERAMIC4.7MF C(1608)
C255	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C256	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C257	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C258	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C259	1-100-507-91	s	CAPACITOR,CERAMIC4.7MF C(1608)
C260	1-100-507-91	s	CAPACITOR,CERAMIC4.7MF C(1608)

(SDI-84 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C261	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C262	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C263	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C264	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C265	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C266	1-100-507-91	s	CAPACITOR,CERAMIC4.7MF C(1608)
C267	1-100-507-91	s	CAPACITOR,CERAMIC4.7MF C(1608)
C268	1-100-507-91	s	CAPACITOR,CERAMIC4.7MF C(1608)
C269	1-100-507-91	s	CAPACITOR,CERAMIC4.7MF C(1608)
C270	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C271	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C272	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C273	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C274	1-100-507-91	s	CAPACITOR,CERAMIC4.7MF C(1608)
C275	1-100-507-91	s	CAPACITOR,CERAMIC4.7MF C(1608)
C289	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C401	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C403	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C407	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C410	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C414	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C416	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C417	1-216-864-11	s	CONDUCTOR, CHIP (1608)
C418	1-216-864-11	s	CONDUCTOR, CHIP (1608)
C420	1-100-507-91	s	CAPACITOR,CERAMIC4.7MF C(1608)
C421	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C422	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C423	1-100-507-91	s	CAPACITOR,CERAMIC4.7MF C(1608)
C424	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C425	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C426	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C427	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C428	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C429	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C430	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C431	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C432	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C433	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C436	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C438	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C439	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C441	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C443	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C444	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C445	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C446	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C447	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C448	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C449	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C450	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C451	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C452	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C453	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C454	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C455	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C456	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C457	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C458	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C459	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V

(SDI-84 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C460	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C461	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C462	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C463	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C464	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C465	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C466	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C467	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C468	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C469	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C470	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C471	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C472	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C473	1-164-850-11	s	CAPACITOR,CHIP CERAMIC 10PF/50
C474	1-164-850-11	s	CAPACITOR,CHIP CERAMIC 10PF/50
C475	1-125-891-11	s	CAPACITOR CERAMIC 0.47MF/10V
C476	*2 1-125-891-91	s	CERAMIC CHIP 0.47UF 10.00% 10V
C601	*1 1-216-295-91	s	SHORT CHIP 0
C602	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C603	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C604	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C605	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C606	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C607	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C608	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C609	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C610	1-100-507-91	s	CAPACITOR,CERAMIC4.7MF C(1608)
C611	1-100-507-91	s	CAPACITOR,CERAMIC4.7MF C(1608)
C612	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C613	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C614	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C617	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C618	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C619	1-100-507-91	s	CAPACITOR,CERAMIC4.7MF C(1608)
C620	1-100-507-91	s	CAPACITOR,CERAMIC4.7MF C(1608)
C621	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C623	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C625	1-100-507-91	s	CAPACITOR,CERAMIC4.7MF C(1608)
C626	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C627	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C628	1-100-507-91	s	CAPACITOR,CERAMIC4.7MF C(1608)
C629	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C630	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C631	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C632	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C633	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C634	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C635	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C636	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C637	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C638	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C639	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C640	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C641	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C642	1-125-891-11	s	CAPACITOR CERAMIC 0.47MF/10V
C644	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C701	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C702	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C703	1-164-858-11	s	CAPACITOR,CERAMIC 22PF/50V

(SDI-84 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C704	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C707	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C710	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C711	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C712	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C713	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C714	1-100-620-91	s	CAPACITOR, CHIP 47MF(3225)
C715	1-100-620-91	s	CAPACITOR, CHIP 47MF(3225)
C716	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C717	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C718	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C719	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C721	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C723	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C724	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C725	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C726	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C727	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C728	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C802	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C803	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C804	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C805	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C806	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C807	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C808	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C809	1-100-620-91	s	CAPACITOR, CHIP 47MF(3225)
C810	1-164-850-11	s	CAPACITOR,CHIP CERAMIC 10PF/50
C812	1-164-866-11	s	CAPACITOR,CHIP CERAMIC 47PF/50
C813	1-100-620-91	s	CAPACITOR, CHIP 47MF(3225)
C814	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C815	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C816	1-100-620-91	s	CAPACITOR, CHIP 47MF(3225)
C852	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C853	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C854	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C855	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C856	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C857	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C858	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C859	1-100-620-91	s	CAPACITOR, CHIP 47MF(3225)
C860	1-164-850-11	s	CAPACITOR,CHIP CERAMIC 10PF/50
C862	1-164-866-11	s	CAPACITOR,CHIP CERAMIC 47PF/50
C863	1-100-620-91	s	CAPACITOR, CHIP 47MF(3225)
C864	1-100-620-91	s	CAPACITOR, CHIP 47MF(3225)
C865	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C866	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C903	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C904	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C905	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C906	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C907	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C908	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C909	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C910	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C911	1-100-507-91	s	CAPACITOR,CERAMIC4.7MF C(1608)
C912	1-100-507-91	s	CAPACITOR,CERAMIC4.7MF C(1608)
C913	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C914	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(SDI-84 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C915	1-100-507-91	s	CAPACITOR,CERAMIC4.7MF C(1608)
C916	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C917	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C918	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C919	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C920	1-100-507-91	s	CAPACITOR,CERAMIC4.7MF C(1608)
C921	1-100-507-91	s	CAPACITOR,CERAMIC4.7MF C(1608)
C927	1-216-864-11	s	CONDUCTOR, CHIP (1608)
C928	1-216-864-11	s	CONDUCTOR, CHIP (1608)
C929	1-100-507-91	s	CAPACITOR,CERAMIC4.7MF C(1608)
C930	1-100-507-91	s	CAPACITOR,CERAMIC4.7MF C(1608)
C932	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C933	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C934	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C935	1-100-507-91	s	CAPACITOR,CERAMIC4.7MF C(1608)
C936	1-100-507-91	s	CAPACITOR,CERAMIC4.7MF C(1608)
C937	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C938	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C939	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C940	1-125-891-11	s	CAPACITOR CERAMIC 0.47MF/10V
CN102	1-695-480-21	o	PIN, CONNECTOR (PC BOARD) 2P
CN201	1-764-243-11	o	CONNECTOR (COAXIAL)
CN202	1-764-080-21	o	PIN, CONNECTOR (PC BOARD) 8P
CN601	1-764-243-11	o	CONNECTOR (COAXIAL)
CN851	1-764-243-11	o	CONNECTOR (COAXIAL)
CN901	1-764-243-11	o	CONNECTOR (COAXIAL)
CP201	⚠ 1-417-611-11	s	CONVERSION MODULE,E/O,EO-300
CP401	1-417-612-11	s	CONVERSION MODULE,O/E,OE-301
D101	8-719-017-03	s	DIODE 02DZ4.7-TPH3
D102	8-719-017-03	s	DIODE 02DZ4.7-TPH3
D103	8-719-037-41	s	DIODE RD20SB-T1
D104	8-719-161-05	s	DIODE RD8.2SB-T1
D105	8-719-989-76	s	DIODE SC802-04-TE12RA
D106	8-719-989-76	s	DIODE SC802-04-TE12RA
D107	8-719-989-76	s	DIODE SC802-04-TE12RA
D108	8-719-989-76	s	DIODE SC802-04-TE12RA
D109	8-719-017-03	s	DIODE 02DZ4.7-TPH3
D110	8-719-017-03	s	DIODE 02DZ4.7-TPH3
D111	8-719-820-41	s	DIODE 1SS302
D112	8-719-159-10	s	DIODE RD5.1SB-T2
D113	8-719-159-10	s	DIODE RD5.1SB-T2
D114	8-719-820-41	s	DIODE 1SS302
D701	8-719-821-58	s	DIODE 1SS271
D702	8-719-820-41	s	DIODE 1SS302
E1	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
E2	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
FB101	1-469-094-21	s	FERRITE, EMI (SMD)
FB102	1-469-094-21	s	FERRITE, EMI (SMD)
FB103	1-469-094-21	s	FERRITE, EMI (SMD)
FB104	1-469-094-21	s	FERRITE, EMI (SMD)
FB105	1-469-094-21	s	FERRITE, EMI (SMD)
FB106	1-469-094-21	s	FERRITE, EMI (SMD)
FB201	1-414-554-21	s	FERRITE, EMI(SMD)
FB202	1-414-554-21	s	FERRITE, EMI(SMD)
FB203	1-414-554-21	s	FERRITE, EMI(SMD)
FB204	1-414-554-21	s	FERRITE, EMI(SMD)

(SDI-84 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
FB205	1-414-554-21	s	FERRITE, EMI(SMD)
FB206	1-414-554-21	s	FERRITE, EMI(SMD)
FB207	1-414-554-21	s	FERRITE, EMI(SMD)
FB208	1-414-554-21	s	FERRITE, EMI(SMD)
FB209	1-414-554-21	s	FERRITE, EMI(SMD)
FB210	1-414-554-21	s	FERRITE, EMI(SMD)
FB211	1-414-554-21	s	FERRITE, EMI(SMD)
FB212	1-414-554-21	s	FERRITE, EMI(SMD)
FB213	1-414-554-21	s	FERRITE, EMI(SMD)
FB402	1-414-554-21	s	FERRITE, EMI(SMD)
FB403	1-414-554-21	s	FERRITE, EMI(SMD)
FB404	1-414-554-21	s	FERRITE, EMI(SMD)
FB405	1-414-554-21	s	FERRITE, EMI(SMD)
FB406	1-414-554-21	s	FERRITE, EMI(SMD)
FB407	1-414-554-21	s	FERRITE, EMI(SMD)
FB408	1-414-554-21	s	FERRITE, EMI(SMD)
FB409	1-414-554-21	s	FERRITE, EMI(SMD)
FB410	1-414-554-21	s	FERRITE, EMI(SMD)
FB601	1-414-554-21	s	FERRITE, EMI(SMD)
FB602	1-414-554-21	s	FERRITE, EMI(SMD)
FB603	1-414-554-21	s	FERRITE, EMI(SMD)
FB604	1-414-554-21	s	FERRITE, EMI(SMD)
FB605	1-414-554-21	s	FERRITE, EMI(SMD)
FB606	1-414-554-21	s	FERRITE, EMI(SMD)
FB607	1-414-554-21	s	FERRITE, EMI(SMD)
FB608	1-414-554-21	s	FERRITE, EMI(SMD)
FB609	1-414-554-21	s	FERRITE, EMI(SMD)
FB610	1-414-554-21	s	FERRITE, EMI(SMD)
FB611	1-414-554-21	s	FERRITE, EMI(SMD)
FB901	1-414-554-21	s	FERRITE, EMI(SMD)
FB902	1-414-554-21	s	FERRITE, EMI(SMD)
FB903	1-414-554-21	s	FERRITE, EMI(SMD)
FB904	1-414-554-21	s	FERRITE, EMI(SMD)
FB905	1-414-554-21	s	FERRITE, EMI(SMD)
FB906	1-414-554-21	s	FERRITE, EMI(SMD)
FB907	1-414-554-21	s	FERRITE, EMI(SMD)
FB908	1-414-554-21	s	FERRITE, EMI(SMD)
FB909	1-414-554-21	s	FERRITE, EMI(SMD)
FB910	1-414-554-21	s	FERRITE, EMI(SMD)
FB912	1-414-554-21	s	FERRITE, EMI(SMD)
FB913	1-414-554-21	s	FERRITE, EMI(SMD)
FL801	1-233-345-21	s	FILTER, LOW PASS (5.5MHZ)
FL851	1-233-345-21	s	FILTER, LOW PASS (5.5MHZ)
IC101	8-759-327-01	s	IC NJM062V-TE2
IC102	8-759-327-01	s	IC NJM062V-TE2
IC103	8-759-327-01	s	IC NJM062V-TE2
IC104	6-704-976-01	s	IC ADR381ART-REEL7
IC105	6-706-482-01	s	IC TC7SH00FU(T5RSOYJF)
IC106	6-701-572-01	s	IC TPS54610PWPR
IC107	6-701-572-01	s	IC TPS54610PWPR
IC109	8-759-359-49	s	IC NJM3414AV (TE2)
IC110	6-706-482-01	s	IC TC7SH00FU(T5RSOYJF)
IC111	8-759-327-01	s	IC NJM062V-TE2
IC112	8-759-338-95	s	IC NJM2903V (TE2)
IC113	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC114	8-759-346-27	s	IC LM45BIM3X
IC201	8-759-592-44	s	IC TC7SZ04FU(TE85R)
IC202	8-759-472-43	s	IC 74VHC245MTCX

(SDI-84 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC204	8-759-363-26	s	IC RN5VD28AA-TL
IC205	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC206	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC208	6-703-693-01	s	IC GS1532-CFE3
IC209	6-702-535-01	s	IC MC100LVEL11DTR2
IC210	6-702-621-01	s	IC GS1528-CKAE3
IC211	8-759-471-96	s	IC 74VHC08MTCX
IC212	9-910-999-34	s	DELETED FROM RP MASTER
IC217	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC218	8-759-592-44	s	IC TC7SZ04FU(TE85R)
IC219	8-759-592-44	s	IC TC7SZ04FU(TE85R)
IC220	8-759-592-44	s	IC TC7SZ04FU(TE85R)
IC221	8-759-592-44	s	IC TC7SZ04FU(TE85R)
IC401	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC403	6-709-052-01	s	IC GS1561-CFE3
IC404	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC405	8-759-592-44	s	IC TC7SZ04FU(TE85R)
IC407	8-759-472-43	s	IC 74VHC245MTCX
IC409	8-759-592-42	s	IC TC7SZ00FU(TE85R)
IC410	6-700-804-01	s	IC SN74LVC574APWR
IC411	6-700-804-01	s	IC SN74LVC574APWR
IC412	6-700-804-01	s	IC SN74LVC574APWR
IC413	6-700-804-01	s	IC SN74LVC574APWR
IC414	6-700-804-01	s	IC SN74LVC574APWR
IC415	6-700-804-01	s	IC SN74LVC574APWR
IC416	8-759-592-42	s	IC TC7SZ00FU(TE85R)
IC417	8-759-592-42	s	IC TC7SZ00FU(TE85R)
IC418	8-759-592-42	s	IC TC7SZ00FU(TE85R)
IC602	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC604	6-706-482-01	s	IC TC7SH00FU(T5RSOYJF)
IC606	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC701	6-706-482-01	s	IC TC7SH00FU(T5RSOYJF)
IC702	8-759-327-01	s	IC NJM062V-TE2
IC703	6-706-482-01	s	IC TC7SH00FU(T5RSOYJF)
IC704	6-708-506-01	s	IC ML86V7666TBZ03A
IC801	8-752-334-64	s	IC CXD1171M
IC802	8-759-561-46	s	IC AD8014ART-REEL7
IC851	8-752-334-64	s	IC CXD1171M
IC852	8-759-561-46	s	IC AD8014ART-REEL7
IC904	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC905	8-759-592-49	s	IC TC7SZ125FU(TE85R)
JC102 *1	1-216-864-91	s	SHORT CHIP 0
JC103 *1	1-216-864-91	s	SHORT CHIP 0
L101	1-416-948-21	s	COIL, CHOKE (SMD)
L102	1-414-398-11	s	INDUCTOR (SMD) 10UH
L103	1-414-398-11	s	INDUCTOR (SMD) 10UH
L104	1-414-398-11	s	INDUCTOR (SMD) 10UH
L105	1-414-398-11	s	INDUCTOR (SMD) 10UH
L106	1-416-344-11	s	COIL, CHOKE 10UH
L107	1-416-344-11	s	COIL, CHOKE 10UH
L108	1-416-344-11	s	COIL, CHOKE 10UH
L201	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L202	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L203	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L204	1-414-457-11	s	INDUCTOR, CHIP (S) 3.3NH
L205	1-414-457-11	s	INDUCTOR, CHIP (S) 3.3NH
L401	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L402	1-414-392-31	s	INDUCTOR (SMD) 1.0UH

(SDI-84 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
L403	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L404	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L601	1-414-461-31	s	INDUCTOR, CHIP (K) 6.8NH
L602	1-414-461-31	s	INDUCTOR, CHIP (K) 6.8NH
L604	1-414-398-11	s	INDUCTOR (SMD) 10UH
L605	1-414-398-11	s	INDUCTOR (SMD) 10UH
L703	1-414-398-11	s	INDUCTOR (SMD) 10UH
L704	1-414-398-11	s	INDUCTOR (SMD) 10UH
L706	1-414-398-11	s	INDUCTOR (SMD) 10UH
L707	1-414-398-11	s	INDUCTOR (SMD) 10UH
L801	1-414-398-11	s	INDUCTOR (SMD) 10UH
L802	1-414-398-11	s	INDUCTOR (SMD) 10UH
L803	1-414-398-11	s	INDUCTOR (SMD) 10UH
L804	1-414-398-11	s	INDUCTOR (SMD) 10UH
L851	1-414-398-11	s	INDUCTOR (SMD) 10UH
L852	1-414-398-11	s	INDUCTOR (SMD) 10UH
L853	1-414-398-11	s	INDUCTOR (SMD) 10UH
L854	1-414-398-11	s	INDUCTOR (SMD) 10UH
L902	1-414-457-11	s	INDUCTOR, CHIP (S) 3.3NH
L903	1-414-457-11	s	INDUCTOR, CHIP (S) 3.3NH
Q101	8-729-032-74	s	TRANSISTOR 2SA1615-Z-K
Q102	8-729-927-99	s	TRANSISTOR 2SC4617R
Q103	8-729-032-74	s	TRANSISTOR 2SA1615-Z-K
Q104	8-729-927-99	s	TRANSISTOR 2SC4617R
Q105 *1	8-729-928-19	s	TRANSISTOR 2SA1774TL-QR
*2	8-729-102-84	s	TRANSISTOR 2SB624-T1BV5
Q106	8-729-927-99	s	TRANSISTOR 2SC4617R
Q107	8-729-927-99	s	TRANSISTOR 2SC4617R
Q108	8-729-807-51	s	TRANSISTOR 2SD1623-S
Q109	8-729-928-81	s	TRANSISTOR DTC144EE
Q110	8-729-041-23	s	TRANSISTOR NDS356AP
Q111	8-729-928-19	s	TRANSISTOR 2SA1774R
Q112	8-729-927-99	s	TRANSISTOR 2SC4617R
Q113	8-729-928-36	s	TRANSISTOR DTA114EE
Q114	8-729-928-36	s	TRANSISTOR DTA114EE
Q115	8-729-928-81	s	TRANSISTOR DTC144EE
Q116	8-729-928-19	s	TRANSISTOR 2SA1774R
Q117	8-729-927-99	s	TRANSISTOR 2SC4617R
Q118	8-729-928-81	s	TRANSISTOR DTC144EE
Q119	8-729-928-81	s	TRANSISTOR DTC144EE
Q120	8-729-927-99	s	TRANSISTOR 2SC4617R
Q201	8-729-927-99	s	TRANSISTOR 2SC4617R
Q202	8-729-928-27	s	TRANSISTOR DTA144EE
Q203	8-729-928-81	s	TRANSISTOR DTC144EE
Q204	8-729-041-23	s	TRANSISTOR NDS356AP
Q205	8-729-041-23	s	TRANSISTOR NDS356AP
Q401	8-729-928-81	s	TRANSISTOR DTC144EE
Q402	8-729-928-27	s	TRANSISTOR DTA144EE
Q403	8-729-928-81	s	TRANSISTOR DTC144EE
Q404	8-729-928-27	s	TRANSISTOR DTA144EE
Q406	8-729-041-23	s	TRANSISTOR NDS356AP
Q409	8-729-041-23	s	TRANSISTOR NDS356AP
Q412	8-729-041-23	s	TRANSISTOR NDS356AP
Q601	8-729-046-30	s	TRANSISTOR 2SC5245-4/5-TL-E
Q603	8-729-927-99	s	TRANSISTOR 2SC4617R
Q604	8-729-928-19	s	TRANSISTOR 2SA1774R
Q606	8-729-927-99	s	TRANSISTOR 2SC4617R
Q607	8-729-928-27	s	TRANSISTOR DTA144EE
Q608	8-729-928-81	s	TRANSISTOR DTC144EE

(SDI-84 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
Q610	8-729-928-27	s	TRANSISTOR DTA144EE
Q611	8-729-928-81	s	TRANSISTOR DTC144EE
Q905	8-729-928-27	s	TRANSISTOR DTA144EE
Q906	8-729-928-81	s	TRANSISTOR DTC144EE
R101	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R102	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R103	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R104	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R105	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R106	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R107 *1	1-208-879-81	s	METAL CHIP 470 0.5% 1/16W
*2	1-218-945-11	s	METAL CHIP 220 0.5% 1/16W
R108	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R109	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R110	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R111	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R112	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R113	1-208-703-11	s	RESISTOR,CHIP 6.8K 1/16W(1005)
R114	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R115	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R116	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R117	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R118	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R119	1-208-931-11	s	RESISTOR, CHIP 68K (1005)
R120	1-208-931-11	s	RESISTOR, CHIP 68K (1005)
R121	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R122	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R123	1-216-833-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R124	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R125	1-216-833-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R126	1-216-833-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R127	1-216-833-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R128	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R129	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R130	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R131	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R132	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R133	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R134	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R135	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R136	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R137	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R138	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R139	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R141	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R142	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R143	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R144	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R145	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005
R146	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R147	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R148	1-208-703-11	s	RESISTOR,CHIP 6.8K 1/16W(1005)
R149	1-208-703-11	s	RESISTOR,CHIP 6.8K 1/16W(1005)
R150	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R151	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R152	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R153	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R154	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R155	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005

(SDI-84 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R156	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R157	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R158	1-208-703-11	s	RESISTOR,CHIP 6.8K 1/16W(1005)
R159	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005
R160	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005
R161 *1	1-208-695-11	s	METAL CHIP 3.3K 0.5% 1/16W
R162 *1	1-208-703-11	s	METAL CHIP 6.8K 0.5% 1/16W
R164	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R165	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R166	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R167	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R168	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R169	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R170	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R171	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R172	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R173	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R174	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R175	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R176	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R177	1-208-679-11	s	RESISTOR CHIP 680 1/16W (1005)
R178	1-208-679-11	s	RESISTOR CHIP 680 1/16W (1005)
R179	1-208-703-11	s	RESISTOR,CHIP 6.8K 1/16W(1005)
R180	1-208-703-11	s	RESISTOR,CHIP 6.8K 1/16W(1005)
R181	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R182	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R183	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R184	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R185	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R186	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R187	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R188	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R189	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R190	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R191	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R192	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R193	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R194	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R195	1-208-663-11	s	RESISTOR CHIP 150 1/16W (1005)
R197 *2	1-208-691-11	s	METAL CHIP 2.2K 0.5% 1/16W
R201	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R202	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R203	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R204	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R205	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R206	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R207	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R208	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R209	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R210	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R211	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R213	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R214	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R216	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R218	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R220	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R221	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R222	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R224	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)

(SDI-84 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R225	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R226	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R227	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R228	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R229	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R235	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R237	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R238	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R239	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R240	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R241	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R242	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R243	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R244	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R245	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R246	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R247	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R248	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R249	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R250	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R252	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R253	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R254	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R255	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R256	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R257	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R258	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R259	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R260	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R261	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R262	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R263	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R264	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R265	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R266	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R267	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R268	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R269	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R270	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R271	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R273	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R277	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R279	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R281	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R282	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R284	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R285	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R286	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R287	1-218-939-11	s	RESISTOR, CHIP 68 1/16W (1005)
R288	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R289	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R290	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R291	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R292	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R294	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R295	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R296	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R297	1-208-652-11	s	RESISTOR CHIP 51 1/16W (1005)
R298	1-208-652-11	s	RESISTOR CHIP 51 1/16W (1005)

(SDI-84 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R299	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R300	1-208-652-11	s	RESISTOR CHIP 51 1/16W (1005)
R301	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R302	1-208-652-11	s	RESISTOR CHIP 51 1/16W (1005)
R303	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R304	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R305	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R306	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R307	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R308	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R309	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R310	1-208-652-11	s	RESISTOR CHIP 51 1/16W (1005)
R311	1-208-652-11	s	RESISTOR CHIP 51 1/16W (1005)
R312	1-208-647-11	s	RESISTOR CHIP 33 1/16W (1005)
R313	1-208-679-11	s	RESISTOR CHIP 680 1/16W (1005)
R314	1-208-860-11	s	RESISTOR CHIP 75 1/16W (1005)
R315	1-208-860-11	s	RESISTOR CHIP 75 1/16W (1005)
R316	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R317	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R318	1-208-860-11	s	RESISTOR CHIP 75 1/16W (1005)
R320	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R322	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R323	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R324	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R325	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R349	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R350	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R352	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R353	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R354	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R355	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R356	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R357	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R358	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R359	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R401	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R402	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R404	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R414	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R422	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R427	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R429	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R430	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R431	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R432	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R433	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R434	1-208-703-11	s	RESISTOR,CHIP 6.8K 1/16W(1005)
R436	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R437	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R438	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R440	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R441	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R442	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R443	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R444	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R445	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R446	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R449	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R451	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)

(SDI-84 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R453	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R456	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R457	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R458	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R459	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R463	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R464	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R466	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R467	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R469	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R471	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R473	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R474	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R475	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R476	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R477	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R478	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R479	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R480	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R481	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R482	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R483	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R484	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R485	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R486	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R487	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R488	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R489	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R490	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R491	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R494	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R495	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R496	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R497	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R500	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R501	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R601	1-208-860-11	s	RESISTOR CHIP 75 1/16W (1005)
R602	1-208-663-11	s	RESISTOR CHIP 150 1/16W (1005)
R603	1-208-663-11	s	RESISTOR CHIP 150 1/16W (1005)
R604	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R606	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R607	1-208-860-11	s	RESISTOR CHIP 75 1/16W (1005)
R608	1-208-860-11	s	RESISTOR CHIP 75 1/16W (1005)
R610	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R611	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R612	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R613	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R614	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R615	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R616	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R617	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R618	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R619	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R620	1-208-652-11	s	RESISTOR CHIP 51 1/16W (1005)
R621	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R622	1-208-652-11	s	RESISTOR CHIP 51 1/16W (1005)
R623	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R624	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R628	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)

(SDI-84 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R630	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R631	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R633	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R634	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R636	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R638	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R640	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R641	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R642	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R644	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R645	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R646	1-208-703-11	s	RESISTOR,CHIP 6.8K 1/16W(1005)
R648	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R649	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R651	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R652	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R653	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R654	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R656	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R657	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R658	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R659	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R661	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R663	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R665	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R666	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R667	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R668	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R669	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R670	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R671	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R672	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R673	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R674	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R675	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R676	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R677	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R683	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R687	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R701	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R703	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R704	1-218-985-11	s	RESISTOR CHIP 470K 1/16W(1005)
R705	1-208-703-11	s	RESISTOR,CHIP 6.8K 1/16W(1005)
R706	1-208-939-11	s	RESISTOR, CHIP 150K (1005)
R707	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R708	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R709	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R710	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R711	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R713	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R714	1-208-703-11	s	RESISTOR,CHIP 6.8K 1/16W(1005)
R715	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R716	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R717	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R718	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R720	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R722	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R723	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R724	1-208-911-11	s	RESISTOR, CHIP 10K (1005)

(SDI-84 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R725	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R726	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R728	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R730	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R732	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R734	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R736	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R738	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R740	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R741	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R742	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R744	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R745	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R746	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R747	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R748	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R749	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R801	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R803	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R804	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R805	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R806	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R807	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R808	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R809	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R810	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R811	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R812	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R814	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R815	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R816	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R817	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R818	1-208-703-11	s	RESISTOR,CHIP 6.8K 1/16W(1005)
R819	1-208-663-11	s	RESISTOR CHIP 150 1/16W (1005)
R820	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R821	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R822	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R823	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R824	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R825	1-208-663-11	s	RESISTOR CHIP 150 1/16W (1005)
R826	1-208-663-11	s	RESISTOR CHIP 150 1/16W (1005)
R851	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R853	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R854	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R855	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R856	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R857	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R858	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R859	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R860	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R861	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R862	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R864	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R865	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R866	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R867	1-208-703-11	s	RESISTOR,CHIP 6.8K 1/16W(1005)
R868	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R869	1-208-663-11	s	RESISTOR CHIP 150 1/16W (1005)
R870	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)

(SDI-84 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R871	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R872	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R873	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R874	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R875	1-208-663-11	s	RESISTOR CHIP 150 1/16W (1005)
R876	1-208-663-11	s	RESISTOR CHIP 150 1/16W (1005)
R904	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R905	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R909	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R910	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R911	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R912	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R913	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R914	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R915	1-218-939-11	s	RESISTOR, CHIP 68 1/16W (1005)
R916	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R917	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R918	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R919	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R920	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R922	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R923	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R924	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R925	1-208-652-11	s	RESISTOR CHIP 51 1/16W (1005)
R926	1-208-652-11	s	RESISTOR CHIP 51 1/16W (1005)
R938	1-208-652-11	s	RESISTOR CHIP 51 1/16W (1005)
R939	1-208-652-11	s	RESISTOR CHIP 51 1/16W (1005)
R940	1-208-647-11	s	RESISTOR CHIP 33 1/16W (1005)
R941	1-208-679-11	s	RESISTOR CHIP 680 1/16W (1005)
R942	1-208-860-11	s	RESISTOR CHIP 75 1/16W (1005)
R943	1-208-860-11	s	RESISTOR CHIP 75 1/16W (1005)
R944	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R945	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R946	1-208-860-11	s	RESISTOR CHIP 75 1/16W (1005)
R948	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R950	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R954	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R955	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R956	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R957	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R958	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R959	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
RB201	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB202	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB203	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB204	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB205	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB206	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB207	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB208	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB209	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB210	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB211	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB212	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB213	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB214	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB215	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB216	1-234-372-11	s	RES, NETWORK 100X4 (1005)

(SDI-84 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB222	1-234-381-21	s	RES, NETWORK 100KX4 (1005)
RB223	1-234-381-21	s	RES, NETWORK 100KX4 (1005)
RB224	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB225	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB226	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB227	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB228	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB401	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB402	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB403	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB404	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB405	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB406	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB407	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB413	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB414	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB415	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB416	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB417	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB418	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB419	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB420	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB421	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB422	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB423	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB424	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB425	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB601	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB602	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB603	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB604	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB701	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB702	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB801	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB802	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB851	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB852	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB901	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB902	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB903	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB904	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB905	1-234-372-11	s	RES, NETWORK 100X4 (1005)
S201	1-692-271-31	s	SWITCH, SLIDE
S202	1-771-721-11	s	SWITCH, TACTILE
TP203	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
TP401	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
TP603	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
TP701	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
TP702	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
TP801	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
TP851	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
X201	1-795-872-11	s	OSCILLATOR
X401	1-795-872-11	s	OSCILLATOR

SDI-84C BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1179-311-A	s	MOUNTED CIRCUIT BOARD, SDI-84C
C101	1-100-620-91	s	CAP, CHIP CERAMIC 47MF B(3225)
C104	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C107	1-165-872-21	s	CAP, ELECT 47MF (5.0X6.5)
C109	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C115	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C116	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C119	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C120	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C122	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C123	1-100-620-91	s	CAP, CHIP CERAMIC 47MF B(3225)
C124	1-100-620-91	s	CAP, CHIP CERAMIC 47MF B(3225)
C125	1-126-400-21	s	CAP, CHIP ELECT 22MF(6.3X5.7)
C126	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C127	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C130	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C132	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C133	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C134	1-100-620-91	s	CAP, CHIP CERAMIC 47MF B(3225)
C135	1-100-620-91	s	CAP, CHIP CERAMIC 47MF B(3225)
C136	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C137	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C138	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C141	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C142	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C143	1-100-620-91	s	CAP, CHIP CERAMIC 47MF B(3225)
C144	1-100-620-91	s	CAP, CHIP CERAMIC 47MF B(3225)
C145	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C146	1-164-936-81	s	CAP, CHIP CERAMIC 680PF B 1005
C147	1-100-620-91	s	CAP, CHIP CERAMIC 47MF B(3225)
C148	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C149	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C150	1-100-620-91	s	CAP, CHIP CERAMIC 47MF B(3225)
C151	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C152	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C155	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C156	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C157	1-100-620-91	s	CAP, CHIP CERAMIC 47MF B(3225)
C158	1-100-620-91	s	CAP, CHIP CERAMIC 47MF B(3225)
C159	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C160	1-164-936-81	s	CAP, CHIP CERAMIC 680PF B 1005
C161	1-100-620-91	s	CAP, CHIP CERAMIC 47MF B(3225)
C162	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C164	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C165	1-100-620-91	s	CAP, CHIP CERAMIC 47MF B(3225)
C166	1-128-414-21	s	CAP, CHIP ELECT 220MF
C167	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C168	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C169	1-128-414-21	s	CAP, CHIP ELECT 220MF
C170	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C171	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C172	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C173	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C174	1-165-872-21	s	CAP, ELECT 47MF (5.0X6.5)
C175	1-100-507-91	s	CAP, CERAMIC 4.7MF C (1608)
C176	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C177	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C178	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225

(SDI-84C BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C179	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C180	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C203	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C204	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C205	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C206	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C208	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C209	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C210	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C211	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C212	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C213	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C214	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C215	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C216	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C218	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C219	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C220	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C221	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C222	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C223	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C224	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C225	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C226	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C227	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C228	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C229	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C230	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C231	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C232	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C233	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C234	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C235	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C236	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C237	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C238	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C239	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C240	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C243	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C244	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C245	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C246	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C247	1-164-939-81	s	CAP, CHIPCERAMIC 2200PF B 1005
C248	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C249	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C250	1-100-507-91	s	CAP, CERAMIC 4.7MF C (1608)
C251	1-100-507-91	s	CAP, CERAMIC 4.7MF C (1608)
C252	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C253	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C254	1-100-507-91	s	CAP, CERAMIC 4.7MF C (1608)
C255	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C256	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C257	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C258	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C259	1-100-507-91	s	CAP, CERAMIC 4.7MF C (1608)
C260	1-100-507-91	s	CAP, CERAMIC 4.7MF C (1608)
C261	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C262	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C263	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)

(SDI-84C BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C264	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C265	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C266	1-100-507-91	s	CAP, CERAMIC 4.7MF C (1608)
C267	1-100-507-91	s	CAP, CERAMIC 4.7MF C (1608)
C268	1-100-507-91	s	CAP, CERAMIC 4.7MF C (1608)
C269	1-100-507-91	s	CAP, CERAMIC 4.7MF C (1608)
C270	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C271	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C272	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C273	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C274	1-100-507-91	s	CAP, CERAMIC 4.7MF C (1608)
C275	1-100-507-91	s	CAP, CERAMIC 4.7MF C (1608)
C289	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C401	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C403	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C407	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C410	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C414	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C416	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C417	1-216-864-91	s	CONDUCTOR, CHIP (1608)
C418	1-216-864-91	s	CONDUCTOR, CHIP (1608)
C420	1-100-507-91	s	CAP, CERAMIC 4.7MF C (1608)
C421	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C422	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C423	1-100-507-91	s	CAP, CERAMIC 4.7MF C (1608)
C424	1-164-939-81	s	CAP, CHIPCERAMIC 2200PF B 1005
C425	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C426	1-164-939-81	s	CAP, CHIPCERAMIC 2200PF B 1005
C427	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C428	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C429	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C430	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C431	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C432	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C433	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C436	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C438	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C439	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C441	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C443	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C444	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C445	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C446	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C447	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C448	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C449	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C450	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C451	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C452	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C453	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C454	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C455	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C456	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C457	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C458	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C459	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C460	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C461	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C462	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(SDI-84C BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C463	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C464	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C465	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C466	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C467	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C468	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C469	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C470	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C471	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C472	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C473	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C474	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C475	1-125-891-91	s	CAP, CHIP CERAMIC0.47MF B 1608
C476	1-125-891-91	s	CAP, CHIP CERAMIC0.47MF B 1608
C704	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C707	1-216-295-91	s	CONDUCTOR, CHIP (2012)
C802	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C803	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C804	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C805	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C806	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C807	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C808	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C809	1-100-620-91	s	CAP, CHIP CERAMIC 47MF B(3225)
C810	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C812	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C813	1-100-620-91	s	CAP, CHIP CERAMIC 47MF B(3225)
C814	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C815	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C816	1-100-620-91	s	CAP, CHIP CERAMIC 47MF B(3225)
CN102	1-695-480-21	o	PIN, CONNECTOR (PC BOARD) 2P
CN201	1-764-243-31	o	CONNECTOR (COAXIAL)
CN202	1-764-080-21	o	PIN, CONNECTOR (PC BOARD) 8P
CP201	1-417-611-11	s	CONVERSION MODULE,E/O,EO-300
CP401	1-417-612-11	s	CONVERSION MODULE,O/E,OE-301
D101	8-719-017-03	s	DIODE 02DZ4.7-TPH3
D102	8-719-017-03	s	DIODE 02DZ4.7-TPH3
D103	8-719-037-41	s	DIODE RD20SB-T1
D104	8-719-161-05	s	DIODE RD8.2SB-T1
D105	8-719-989-77	s	DIODE SC802-04-TE12RA
D106	8-719-989-77	s	DIODE SC802-04-TE12RA
D107	8-719-989-77	s	DIODE SC802-04-TE12RA
D108	8-719-989-77	s	DIODE SC802-04-TE12RA
D109	8-719-017-03	s	DIODE 02DZ4.7-TPH3
D110	8-719-017-03	s	DIODE 02DZ4.7-TPH3
D111	8-719-820-42	s	DIODE 1SS302-TE85L
D112	8-719-036-91	s	DIODE RD5.1SB-T1
D113	8-719-036-91	s	DIODE RD5.1SB-T1
D114	8-719-820-42	s	DIODE 1SS302-TE85L
E1	1-535-877-22	s	CHIP, CHECKER
E2	1-535-877-22	s	CHIP, CHECKER
FB101	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB102	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB103	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB104	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB105	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB106	1-469-094-21	s	FERRITE, EMI (SMD) (1608)

(SDI-84C BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
FB201	1-414-554-21	s	FERRITE, EMI (SMD) (1608)
FB202	1-414-554-21	s	FERRITE, EMI (SMD) (1608)
FB203	1-414-554-21	s	FERRITE, EMI (SMD) (1608)
FB204	1-414-554-21	s	FERRITE, EMI (SMD) (1608)
FB205	1-414-554-21	s	FERRITE, EMI (SMD) (1608)
FB206	1-414-554-21	s	FERRITE, EMI (SMD) (1608)
FB207	1-414-554-21	s	FERRITE, EMI (SMD) (1608)
FB208	1-414-554-21	s	FERRITE, EMI (SMD) (1608)
FB209	1-414-554-21	s	FERRITE, EMI (SMD) (1608)
FB210	1-414-554-21	s	FERRITE, EMI (SMD) (1608)
FB211	1-414-554-21	s	FERRITE, EMI (SMD) (1608)
FB212	1-414-554-21	s	FERRITE, EMI (SMD) (1608)
FB213	1-414-554-21	s	FERRITE, EMI (SMD) (1608)
FB402	1-414-554-21	s	FERRITE, EMI (SMD) (1608)
FB403	1-414-554-21	s	FERRITE, EMI (SMD) (1608)
FB404	1-414-554-21	s	FERRITE, EMI (SMD) (1608)
FB405	1-414-554-21	s	FERRITE, EMI (SMD) (1608)
FB406	1-414-554-21	s	FERRITE, EMI (SMD) (1608)
FB407	1-414-554-21	s	FERRITE, EMI (SMD) (1608)
FB408	1-414-554-21	s	FERRITE, EMI (SMD) (1608)
FB409	1-414-554-21	s	FERRITE, EMI (SMD) (1608)
FB410	1-414-554-21	s	FERRITE, EMI (SMD) (1608)
FL801	1-233-345-21	s	FILTER, LOW PASS (5.5MHZ)
IC101	8-759-327-01	s	IC NJM062V(TE2)
IC102	8-759-327-01	s	IC NJM062V(TE2)
IC103	8-759-327-01	s	IC NJM062V(TE2)
IC104	6-704-976-01	s	IC ADR381ARTZ-REEL7
IC105	6-706-482-01	s	IC TC7SH00FU(T5RSOYJF)
IC106	6-701-572-01	s	IC TPS54610PWPR
IC107	6-701-572-01	s	IC TPS54610PWPR
IC109	8-759-359-49	s	IC NJM3414AV(TE2)
IC110	6-706-482-01	s	IC TC7SH00FU(T5RSOYJF)
IC111	8-759-327-01	s	IC NJM062V(TE2)
IC112	8-759-338-95	s	IC NJM2903V(TE2)
IC113	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC114	8-759-346-27	s	IC LM45BIM3X
IC201	8-759-592-44	s	IC TC7SZ04FU(TE85R)
IC202	8-759-472-43	s	IC 74VHC245MTCX
IC204	8-759-363-26	s	IC RN5VD28AA-TL-FA
IC205	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC206	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC208	6-703-693-01	s	IC GS1532-CFE3
IC209	6-702-535-01	s	IC MC100LVEL11DTR2
IC211	8-759-471-96	s	IC 74VHC08MTCX
IC217	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC218	8-759-592-44	s	IC TC7SZ04FU(TE85R)
IC219	8-759-592-44	s	IC TC7SZ04FU(TE85R)
IC220	8-759-592-44	s	IC TC7SZ04FU(TE85R)
IC221	8-759-592-44	s	IC TC7SZ04FU(TE85R)
IC401	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC403	6-709-052-01	s	IC GS1561-CFE3
IC404	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC405	8-759-592-44	s	IC TC7SZ04FU(TE85R)
IC407	8-759-472-43	s	IC 74VHC245MTCX
IC409	8-759-592-42	s	IC TC7SZ00FU(TE85R)
IC410	6-700-804-01	s	IC SN74LVC574APWR
IC411	6-700-804-01	s	IC SN74LVC574APWR
IC412	6-700-804-01	s	IC SN74LVC574APWR

(SDI-84C BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC413	6-700-804-01	s	IC SN74LVC574APWR
IC414	6-700-804-01	s	IC SN74LVC574APWR
IC415	6-700-804-01	s	IC SN74LVC574APWR
IC416	8-759-592-42	s	IC TC7SZ00FU(TE85R)
IC417	8-759-592-42	s	IC TC7SZ00FU(TE85R)
IC418	8-759-592-42	s	IC TC7SZ00FU(TE85R)
IC703	6-706-482-01	s	IC TC7SH00FU(T5RSOYJF)
IC801	8-752-371-56	s	IC CXD1171M-TH
IC802	8-759-561-46	s	IC AD8014ARTZ-REEL7
L101	1-416-948-21	s	COIL, CHOKE 10UH
L102	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L103	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L104	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L105	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L106	1-416-344-21	s	COIL, CHOKE 10UH
L107	1-416-344-21	s	COIL, CHOKE 10UH
L108	1-416-344-21	s	COIL, CHOKE 10UH
L201	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L202	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L203	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L204	1-414-457-21	s	INDUCTOR, CHIP (S) 3.3NH
L205	1-414-457-21	s	INDUCTOR, CHIP (S) 3.3NH
L401	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L402	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L403	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L404	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L801	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L802	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L803	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L804	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
Q101	8-729-035-99	s	TRANSISTOR 2SA1615-Z-E2
Q102	8-729-927-99	s	TRANSISTOR 2SC4617TL-QR
Q103	8-729-035-99	s	TRANSISTOR 2SA1615-Z-E2
Q104	8-729-927-99	s	TRANSISTOR 2SC4617TL-QR
Q105	8-729-102-84	s	TRANSISTOR 2SB624-T1BV5
Q106	8-729-927-99	s	TRANSISTOR 2SC4617TL-QR
Q107	8-729-927-99	s	TRANSISTOR 2SC4617TL-QR
Q108	8-729-209-77	s	TRANSISTOR 2SC2873Y-TE12L
Q109	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q110	8-729-041-23	s	TRANSISTOR NDS356AP
Q111	8-729-928-19	s	TRANSISTOR 2SA1774TL-QR
Q112	8-729-927-99	s	TRANSISTOR 2SC4617TL-QR
Q113	8-729-928-37	s	TRANSISTOR DTA114EE-TL
Q114	8-729-928-37	s	TRANSISTOR DTA114EE-TL
Q115	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q116	8-729-928-19	s	TRANSISTOR 2SA1774TL-QR
Q117	8-729-927-99	s	TRANSISTOR 2SC4617TL-QR
Q118	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q119	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q120	8-729-927-99	s	TRANSISTOR 2SC4617TL-QR
Q201	8-729-927-99	s	TRANSISTOR 2SC4617TL-QR
Q202	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q203	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q204	8-729-041-23	s	TRANSISTOR NDS356AP
Q205	8-729-041-23	s	TRANSISTOR NDS356AP
Q401	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q402	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q403	8-729-928-82	s	TRANSISTOR DTC144EE-TL

(SDI-84C BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
Q404	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q406	8-729-041-23	s	TRANSISTOR NDS356AP
Q409	8-729-041-23	s	TRANSISTOR NDS356AP
Q412	8-729-041-23	s	TRANSISTOR NDS356AP
R101	1-218-941-11	s	RES, CHIP 100 (1005)
R102	1-218-945-11	s	RES, CHIP 220 (1005)
R103	1-218-945-11	s	RES, CHIP 220 (1005)
R104	1-208-923-81	s	RES, CHIP 33K (1005)
R105	1-208-923-81	s	RES, CHIP 33K (1005)
R106	1-218-941-11	s	RES, CHIP 100 (1005)
R107	1-218-945-11	s	RES, CHIP 220 (1005)
R108	1-208-691-11	s	RES, CHIP 2.2K (1005)
R109	1-208-923-81	s	RES, CHIP 33K (1005)
R110	1-208-923-81	s	RES, CHIP 33K (1005)
R111	1-208-715-11	s	RES, CHIP 22K (1005)
R112	1-208-923-81	s	RES, CHIP 33K (1005)
R113	1-208-703-11	s	RES, CHIP 6.8K (1005)
R114	1-218-945-11	s	RES, CHIP 220 (1005)
R115	1-218-945-11	s	RES, CHIP 220 (1005)
R116	1-208-923-81	s	RES, CHIP 33K (1005)
R117	1-208-923-81	s	RES, CHIP 33K (1005)
R118	1-208-927-81	s	RES, CHIP 47K (1005)
R119	1-208-931-81	s	RES, CHIP 68K (1005)
R120	1-208-931-81	s	RES, CHIP 68K (1005)
R121	1-208-911-81	s	RES, CHIP 10K (1005)
R122	1-208-911-81	s	RES, CHIP 10K (1005)
R123	1-216-833-91	s	RES, CHIP 10K (1608)
R124	1-218-941-11	s	RES, CHIP 100 (1005)
R125	1-216-833-91	s	RES, CHIP 10K (1608)
R126	1-216-833-91	s	RES, CHIP 10K (1608)
R127	1-216-833-91	s	RES, CHIP 10K (1608)
R128	1-208-935-81	s	RES, CHIP 100K (1005)
R129	1-208-911-81	s	RES, CHIP 10K (1005)
R130	1-218-945-11	s	RES, CHIP 220 (1005)
R131	1-218-945-11	s	RES, CHIP 220 (1005)
R132	1-208-923-81	s	RES, CHIP 33K (1005)
R133	1-208-923-81	s	RES, CHIP 33K (1005)
R134	1-208-699-11	s	RES, CHIP 4.7K (1005)
R135	1-208-927-81	s	RES, CHIP 47K (1005)
R136	1-208-911-81	s	RES, CHIP 10K (1005)
R137	1-208-911-81	s	RES, CHIP 10K (1005)
R138	1-208-923-81	s	RES, CHIP 33K (1005)
R139	1-208-927-81	s	RES, CHIP 47K (1005)
R141	1-208-683-11	s	RES, CHIP 1.0K (1005)
R142	1-208-683-11	s	RES, CHIP 1.0K (1005)
R143	1-208-683-11	s	RES, CHIP 1.0K (1005)
R144	1-208-911-81	s	RES, CHIP 10K (1005)
R145	1-208-891-81	s	RES, CHIP 1.5K (1005)
R146	1-218-941-11	s	RES, CHIP 100 (1005)
R147	1-208-911-81	s	RES, CHIP 10K (1005)
R148	1-208-703-11	s	RES, CHIP 6.8K (1005)
R149	1-208-703-11	s	RES, CHIP 6.8K (1005)
R150	1-208-683-11	s	RES, CHIP 1.0K (1005)
R151	1-208-935-81	s	RES, CHIP 100K (1005)
R152	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R153	1-218-945-11	s	RES, CHIP 220 (1005)
R154	1-218-941-11	s	RES, CHIP 100 (1005)
R155	1-208-891-81	s	RES, CHIP 1.5K (1005)
R156	1-218-941-11	s	RES, CHIP 100 (1005)

(SDI-84C BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R157	1-208-911-81	s	RES, CHIP 10K (1005)
R158	1-208-703-11	s	RES, CHIP 6.8K (1005)
R159	1-208-891-81	s	RES, CHIP 1.5K (1005)
R160	1-208-891-81	s	RES, CHIP 1.5K (1005)
R164	1-208-935-81	s	RES, CHIP 100K (1005)
R165	1-218-941-11	s	RES, CHIP 100 (1005)
R166	1-208-855-81	s	RES, CHIP 47 (1005)
R167	1-208-935-81	s	RES, CHIP 100K (1005)
R168	1-208-683-11	s	RES, CHIP 1.0K (1005)
R169	1-218-941-11	s	RES, CHIP 100 (1005)
R170	1-218-941-11	s	RES, CHIP 100 (1005)
R171	1-208-683-11	s	RES, CHIP 1.0K (1005)
R172	1-208-683-11	s	RES, CHIP 1.0K (1005)
R173	1-208-683-11	s	RES, CHIP 1.0K (1005)
R174	1-208-695-11	s	RES, CHIP 3.3K (1005)
R175	1-208-695-11	s	RES, CHIP 3.3K (1005)
R176	1-208-683-11	s	RES, CHIP 1.0K (1005)
R177	1-208-883-81	s	RES, CHIP 680 (1005)
R178	1-208-883-81	s	RES, CHIP 680 (1005)
R179	1-208-703-11	s	RES, CHIP 6.8K (1005)
R180	1-208-703-11	s	RES, CHIP 6.8K (1005)
R181	1-208-683-11	s	RES, CHIP 1.0K (1005)
R182	1-208-683-11	s	RES, CHIP 1.0K (1005)
R183	1-208-715-11	s	RES, CHIP 22K (1005)
R184	1-208-715-11	s	RES, CHIP 22K (1005)
R185	1-208-715-11	s	RES, CHIP 22K (1005)
R186	1-208-927-81	s	RES, CHIP 47K (1005)
R187	1-218-941-11	s	RES, CHIP 100 (1005)
R188	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R189	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R190	1-208-683-11	s	RES, CHIP 1.0K (1005)
R191	1-208-911-81	s	RES, CHIP 10K (1005)
R192	1-208-923-81	s	RES, CHIP 33K (1005)
R193	1-208-879-81	s	RES, CHIP 470 (1005)
R194	1-218-941-11	s	RES, CHIP 100 (1005)
R195	1-208-867-81	s	RES, CHIP 150 (1005)
R197	1-208-691-11	s	RES, CHIP 2.2K (1005)
R201	1-208-911-81	s	RES, CHIP 10K (1005)
R202	1-208-911-81	s	RES, CHIP 10K (1005)
R203	1-208-635-11	s	RES, CHIP 10 (1005)
R204	1-208-911-81	s	RES, CHIP 10K (1005)
R205	1-208-635-11	s	RES, CHIP 10 (1005)
R206	1-208-911-81	s	RES, CHIP 10K (1005)
R207	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R208	1-208-911-81	s	RES, CHIP 10K (1005)
R209	1-218-941-11	s	RES, CHIP 100 (1005)
R210	1-218-941-11	s	RES, CHIP 100 (1005)
R211	1-218-941-11	s	RES, CHIP 100 (1005)
R213	1-208-855-81	s	RES, CHIP 47 (1005)
R214	1-208-855-81	s	RES, CHIP 47 (1005)
R216	1-208-635-11	s	RES, CHIP 10 (1005)
R218	1-208-635-11	s	RES, CHIP 10 (1005)
R220	1-218-941-11	s	RES, CHIP 100 (1005)
R221	1-218-941-11	s	RES, CHIP 100 (1005)
R222	1-218-941-11	s	RES, CHIP 100 (1005)
R224	1-218-941-11	s	RES, CHIP 100 (1005)
R225	1-218-941-11	s	RES, CHIP 100 (1005)
R226	1-218-941-11	s	RES, CHIP 100 (1005)
R227	1-218-941-11	s	RES, CHIP 100 (1005)

(SDI-84C BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R228	1-208-911-81	s	RES, CHIP 10K (1005)
R229	1-208-935-81	s	RES, CHIP 100K (1005)
R235	1-208-855-81	s	RES, CHIP 47 (1005)
R237	1-218-941-11	s	RES, CHIP 100 (1005)
R238	1-218-941-11	s	RES, CHIP 100 (1005)
R239	1-218-941-11	s	RES, CHIP 100 (1005)
R240	1-218-941-11	s	RES, CHIP 100 (1005)
R241	1-208-911-81	s	RES, CHIP 10K (1005)
R242	1-208-635-11	s	RES, CHIP 10 (1005)
R243	1-218-941-11	s	RES, CHIP 100 (1005)
R244	1-218-941-11	s	RES, CHIP 100 (1005)
R245	1-218-941-11	s	RES, CHIP 100 (1005)
R246	1-218-941-11	s	RES, CHIP 100 (1005)
R247	1-218-941-11	s	RES, CHIP 100 (1005)
R248	1-218-941-11	s	RES, CHIP 100 (1005)
R249	1-218-941-11	s	RES, CHIP 100 (1005)
R250	1-218-941-11	s	RES, CHIP 100 (1005)
R252	1-218-941-11	s	RES, CHIP 100 (1005)
R253	1-208-683-11	s	RES, CHIP 1.0K (1005)
R254	1-218-941-11	s	RES, CHIP 100 (1005)
R255	1-218-941-11	s	RES, CHIP 100 (1005)
R256	1-218-941-11	s	RES, CHIP 100 (1005)
R257	1-218-941-11	s	RES, CHIP 100 (1005)
R258	1-218-941-11	s	RES, CHIP 100 (1005)
R259	1-218-941-11	s	RES, CHIP 100 (1005)
R260	1-218-941-11	s	RES, CHIP 100 (1005)
R261	1-218-941-11	s	RES, CHIP 100 (1005)
R262	1-218-941-11	s	RES, CHIP 100 (1005)
R263	1-218-941-11	s	RES, CHIP 100 (1005)
R264	1-218-941-11	s	RES, CHIP 100 (1005)
R265	1-218-941-11	s	RES, CHIP 100 (1005)
R266	1-218-941-11	s	RES, CHIP 100 (1005)
R267	1-218-941-11	s	RES, CHIP 100 (1005)
R268	1-218-941-11	s	RES, CHIP 100 (1005)
R269	1-218-941-11	s	RES, CHIP 100 (1005)
R270	1-218-941-11	s	RES, CHIP 100 (1005)
R271	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R273	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R277	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R279	1-208-711-11	s	RES, CHIP 15K (1005)
R281	1-208-635-11	s	RES, CHIP 10 (1005)
R282	1-208-683-11	s	RES, CHIP 1.0K (1005)
R284	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R285	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R286	1-218-945-11	s	RES, CHIP 220 (1005)
R287	1-218-939-11	s	RES, CHIP 68 (1005)
R288	1-208-683-11	s	RES, CHIP 1.0K (1005)
R289	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R290	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R291	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R292	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R294	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R295	1-208-683-11	s	RES, CHIP 1.0K (1005)
R296	1-208-683-11	s	RES, CHIP 1.0K (1005)
R297	1-208-856-81	s	RES, CHIP 51 (1005)
R298	1-208-856-81	s	RES, CHIP 51 (1005)
R299	1-218-945-11	s	RES, CHIP 220 (1005)
R300	1-208-856-81	s	RES, CHIP 51 (1005)
R301	1-208-699-11	s	RES, CHIP 4.7K (1005)

(SDI-84C BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R302	1-208-856-81	s	RES, CHIP 51 (1005)
R303	1-208-695-11	s	RES, CHIP 3.3K (1005)
R304	1-218-945-11	s	RES, CHIP 220 (1005)
R305	1-218-945-11	s	RES, CHIP 220 (1005)
R306	1-218-945-11	s	RES, CHIP 220 (1005)
R307	1-218-945-11	s	RES, CHIP 220 (1005)
R308	1-208-699-11	s	RES, CHIP 4.7K (1005)
R309	1-208-927-81	s	RES, CHIP 47K (1005)
R310	1-208-856-81	s	RES, CHIP 51 (1005)
R311	1-208-856-81	s	RES, CHIP 51 (1005)
R312	1-220-882-81	s	RES, CHIP 33 (1005)
R313	1-208-883-81	s	RES, CHIP 680 (1005)
R314	1-208-860-81	s	RES, CHIP 75 (1005)
R315	1-208-860-81	s	RES, CHIP 75 (1005)
R316	1-218-941-11	s	RES, CHIP 100 (1005)
R317	1-218-941-11	s	RES, CHIP 100 (1005)
R318	1-208-860-81	s	RES, CHIP 75 (1005)
R320	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R322	1-218-941-11	s	RES, CHIP 100 (1005)
R323	1-208-935-81	s	RES, CHIP 100K (1005)
R324	1-208-911-81	s	RES, CHIP 10K (1005)
R325	1-208-911-81	s	RES, CHIP 10K (1005)
R349	1-218-941-11	s	RES, CHIP 100 (1005)
R350	1-208-691-11	s	RES, CHIP 2.2K (1005)
R352	1-218-941-11	s	RES, CHIP 100 (1005)
R353	1-218-941-11	s	RES, CHIP 100 (1005)
R354	1-218-941-11	s	RES, CHIP 100 (1005)
R355	1-218-941-11	s	RES, CHIP 100 (1005)
R356	1-218-941-11	s	RES, CHIP 100 (1005)
R357	1-218-941-11	s	RES, CHIP 100 (1005)
R358	1-218-941-11	s	RES, CHIP 100 (1005)
R359	1-218-941-11	s	RES, CHIP 100 (1005)
R401	1-208-927-81	s	RES, CHIP 47K (1005)
R402	1-208-935-81	s	RES, CHIP 100K (1005)
R404	1-208-911-81	s	RES, CHIP 10K (1005)
R414	1-208-911-81	s	RES, CHIP 10K (1005)
R422	1-208-911-81	s	RES, CHIP 10K (1005)
R427	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R429	1-208-855-81	s	RES, CHIP 47 (1005)
R430	1-208-699-11	s	RES, CHIP 4.7K (1005)
R431	1-208-699-11	s	RES, CHIP 4.7K (1005)
R432	1-208-683-11	s	RES, CHIP 1.0K (1005)
R433	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R434	1-208-703-11	s	RES, CHIP 6.8K (1005)
R436	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R437	1-218-941-11	s	RES, CHIP 100 (1005)
R438	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R440	1-208-683-11	s	RES, CHIP 1.0K (1005)
R441	1-208-683-11	s	RES, CHIP 1.0K (1005)
R442	1-208-635-11	s	RES, CHIP 10 (1005)
R443	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R444	1-208-691-11	s	RES, CHIP 2.2K (1005)
R445	1-218-941-11	s	RES, CHIP 100 (1005)
R446	1-208-683-11	s	RES, CHIP 1.0K (1005)
R449	1-208-635-11	s	RES, CHIP 10 (1005)
R451	1-208-635-11	s	RES, CHIP 10 (1005)
R453	1-208-635-11	s	RES, CHIP 10 (1005)
R456	1-218-941-11	s	RES, CHIP 100 (1005)
R457	1-218-941-11	s	RES, CHIP 100 (1005)

(SDI-84C BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R458	1-218-941-11	s	RES, CHIP 100 (1005)
R459	1-218-941-11	s	RES, CHIP 100 (1005)
R463	1-208-855-81	s	RES, CHIP 47 (1005)
R464	1-208-855-81	s	RES, CHIP 47 (1005)
R466	1-218-941-11	s	RES, CHIP 100 (1005)
R467	1-208-855-81	s	RES, CHIP 47 (1005)
R469	1-208-855-81	s	RES, CHIP 47 (1005)
R471	1-208-691-11	s	RES, CHIP 2.2K (1005)
R473	1-218-941-11	s	RES, CHIP 100 (1005)
R474	1-218-941-11	s	RES, CHIP 100 (1005)
R475	1-218-941-11	s	RES, CHIP 100 (1005)
R476	1-208-911-81	s	RES, CHIP 10K (1005)
R477	1-208-683-11	s	RES, CHIP 1.0K (1005)
R478	1-218-941-11	s	RES, CHIP 100 (1005)
R479	1-218-941-11	s	RES, CHIP 100 (1005)
R480	1-218-941-11	s	RES, CHIP 100 (1005)
R481	1-218-941-11	s	RES, CHIP 100 (1005)
R482	1-218-941-11	s	RES, CHIP 100 (1005)
R483	1-218-941-11	s	RES, CHIP 100 (1005)
R484	1-218-941-11	s	RES, CHIP 100 (1005)
R485	1-218-941-11	s	RES, CHIP 100 (1005)
R486	1-218-941-11	s	RES, CHIP 100 (1005)
R487	1-218-941-11	s	RES, CHIP 100 (1005)
R488	1-218-941-11	s	RES, CHIP 100 (1005)
R489	1-218-941-11	s	RES, CHIP 100 (1005)
R490	1-218-941-11	s	RES, CHIP 100 (1005)
R491	1-218-941-11	s	RES, CHIP 100 (1005)
R494	1-208-635-11	s	RES, CHIP 10 (1005)
R495	1-208-635-11	s	RES, CHIP 10 (1005)
R496	1-208-855-81	s	RES, CHIP 47 (1005)
R497	1-208-855-81	s	RES, CHIP 47 (1005)
R500	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R501	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R502	1-208-683-11	s	RES, CHIP 1.0K (1005)
R801	1-218-941-11	s	RES, CHIP 100 (1005)
R803	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R804	1-208-699-11	s	RES, CHIP 4.7K (1005)
R805	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R806	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R807	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R808	1-208-715-11	s	RES, CHIP 22K (1005)
R809	1-208-911-81	s	RES, CHIP 10K (1005)
R810	1-208-715-11	s	RES, CHIP 22K (1005)
R811	1-208-875-81	s	RES, CHIP 330 (1005)
R812	1-208-683-11	s	RES, CHIP 1.0K (1005)
R814	1-208-683-11	s	RES, CHIP 1.0K (1005)
R815	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R816	1-218-941-11	s	RES, CHIP 100 (1005)
R817	1-208-879-81	s	RES, CHIP 470 (1005)
R818	1-208-703-11	s	RES, CHIP 6.8K (1005)
R819	1-208-867-81	s	RES, CHIP 150 (1005)
R820	1-218-945-11	s	RES, CHIP 220 (1005)
R821	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R822	1-208-691-11	s	RES, CHIP 2.2K (1005)
R823	1-208-635-11	s	RES, CHIP 10 (1005)
R824	1-218-941-11	s	RES, CHIP 100 (1005)
R825	1-208-867-81	s	RES, CHIP 150 (1005)
R826	1-208-867-81	s	RES, CHIP 150 (1005)

(SDI-84C BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB201	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB202	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB203	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB204	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB205	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB206	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB207	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB208	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB209	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB210	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB211	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB212	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB213	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB214	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB215	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB216	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB222	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB223	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB224	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB225	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB226	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB227	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB228	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB401	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB402	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB403	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB404	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB405	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB406	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB407	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB413	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB414	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB415	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB416	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB417	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB418	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB419	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB420	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB421	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB422	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB423	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB424	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB425	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB801	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB802	1-234-372-21	s	RES, NETWORK 100 (1005X4)
S201	1-692-271-41	s	SWITCH, SLIDE
S202	1-771-721-21	s	SWITCH, TACTILE
TP203	1-535-877-22	s	CHIP, CHECKER
TP401	1-535-877-22	s	CHIP, CHECKER
TP801	1-535-877-22	s	CHIP, CHECKER
X201	1-795-872-11	s	OSCILLATOR
X401	1-795-872-11	s	OSCILLATOR

SW-1233 BOARD

---

*1: [Board No. suffix 13-]

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1163-069-A	s	MOUNTED CIRCUIT BOARD,SW-1233G (GOLD)
	A-1124-074-A	s	MOUNTED CIRCUIT BOARD, SW-1233 (SILVER)
1pc	3-708-877-01	s	CAP (PC)
1pc	3-708-930-01	s	CAP (PC)
1pc	3-708-930-21	s	CAP (PC)
1pc	3-708-933-01	s	CAP (PC)
1pc	3-708-933-11	s	CAP (PC)
1pc	3-708-934-01	s	CAP (PC)
1pc	1-251-222-21	s	SOCKET, SIL 7P
1pc	1-573-201-21	s	SOCKET, SIL 5P
1pc	1-573-201-21	s	SOCKET, SIL 5P
1pc	1-251-222-21	s	SOCKET, SIL 7P
1pc	1-573-201-21	s	SOCKET, SIL 5P
1pc	1-573-201-21	s	SOCKET, SIL 5P
1pc	1-251-222-21	s	SOCKET, SIL 7P
1pc	1-251-222-21	s	SOCKET, SIL 7P
1pc	8-719-050-78	s	LED MD0708C-RG
C1	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C2	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C3	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C4	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C5	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C6	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C7	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C8	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C10	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C11	*1 1-125-777-11	s	CERAMIC CHIP 0.1UF 10.00% 10V
C12	*1 1-100-159-91	s	CERAMIC CHIP 22UF 10% 6.3V
C14	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C100	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C101	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C102	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C103	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
CN1	1-778-650-11	o	CONNECTOR, FFC (ZIF) 30P (SILVER)
CN2	1-778-650-11	o	CONNECTOR, FFC (ZIF) 30P (SILVER)
CN3	1-251-222-21	s	SOCKET, SIL 7P
CN4	1-573-201-21	s	SOCKET, SIL 5P
CN5	1-573-201-21	s	SOCKET, SIL 5P
CN6	1-251-222-21	s	SOCKET, SIL 7P
D1	8-719-027-95	s	DIODE HSM88WK
D2	8-719-017-42	s	DIODE HSM88WA
D3	8-719-078-90	s	DIODE CL-165HR/G1-D-T
D4	8-719-024-81	s	DIODE 1SS300-TE85L
D5	8-719-024-81	s	DIODE 1SS300-TE85L
D6	8-719-024-81	s	DIODE 1SS300-TE85L
D7	8-719-024-81	s	DIODE 1SS300-TE85L
D8	8-719-024-81	s	DIODE 1SS300-TE85L
D9	8-719-024-81	s	DIODE 1SS300-TE85L
D10	8-719-024-81	s	DIODE 1SS300-TE85L
D11	8-719-024-81	s	DIODE 1SS300-TE85L
D12	8-719-024-81	s	DIODE 1SS300-TE85L
D13	8-719-024-81	s	DIODE 1SS300-TE85L

(SW-1233 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
D14	8-719-024-81	s	DIODE 1SS300-TE85L
D15	8-719-024-81	s	DIODE 1SS300-TE85L
D16	8-719-024-81	s	DIODE 1SS300-TE85L
D17	8-719-024-81	s	DIODE 1SS300-TE85L
D18	8-719-024-81	s	DIODE 1SS300-TE85L
D19	8-719-024-81	s	DIODE 1SS300-TE85L
D20	8-719-024-81	s	DIODE 1SS300-TE85L
D21	8-719-024-81	s	DIODE 1SS300-TE85L
D22	8-719-024-81	s	DIODE 1SS300-TE85L
D23	8-719-024-81	s	DIODE 1SS300-TE85L
D24	8-719-024-81	s	DIODE 1SS300-TE85L
D25	8-719-024-81	s	DIODE 1SS300-TE85L
D26	8-719-024-81	s	DIODE 1SS300-TE85L
D27	8-719-024-81	s	DIODE 1SS300-TE85L
D29	8-719-024-81	s	DIODE 1SS300-TE85L
D30	8-719-024-81	s	DIODE 1SS300-TE85L
D31	8-719-024-81	s	DIODE 1SS300-TE85L
D32	8-719-024-81	s	DIODE 1SS300-TE85L
EN1	1-473-435-11	s	ENCODER, ROTARY(SWITCH)
IC1	8-759-524-40	s	IC TC74VHC373FT(EL)
IC2	8-759-524-40	s	IC TC74VHC373FT(EL)
IC3	8-759-531-92	s	IC TC7WH04FU(TE12R)
IC4	6-704-238-01	s	IC S-812C30AUA-C2KT2G
IC5 *1	6-704-238-01	s	IC S-812C30AUA-C2KT2G
Q1	8-729-928-90	s	TRANSISTOR DTC114EE
Q2	8-729-928-90	s	TRANSISTOR DTC114EE
Q3	8-729-928-90	s	TRANSISTOR DTC114EE
Q4	8-729-928-90	s	TRANSISTOR DTC114EE
Q5	8-729-928-90	s	TRANSISTOR DTC114EE
Q6	8-729-928-90	s	TRANSISTOR DTC114EE
Q7	8-729-928-90	s	TRANSISTOR DTC114EE
Q8	8-729-928-90	s	TRANSISTOR DTC114EE
Q100	8-729-929-08	s	TRANSISTOR DTC123JE
Q101	8-729-929-08	s	TRANSISTOR DTC123JE
Q102	8-729-929-08	s	TRANSISTOR DTC123JE
Q103	8-729-929-08	s	TRANSISTOR DTC123JE
Q104	8-729-929-08	s	TRANSISTOR DTC123JE
Q105	8-729-929-08	s	TRANSISTOR DTC123JE
Q106	8-729-929-08	s	TRANSISTOR DTC123JE
Q107	8-729-929-08	s	TRANSISTOR DTC123JE
Q108	8-729-162-45	s	TRANSISTOR 2SB624-BV5
Q109	8-729-162-45	s	TRANSISTOR 2SB624-BV5
Q110	8-729-162-45	s	TRANSISTOR 2SB624-BV5
Q111	8-729-162-45	s	TRANSISTOR 2SB624-BV5
Q112	8-729-929-08	s	TRANSISTOR DTC123JE
Q113	8-729-929-08	s	TRANSISTOR DTC123JE
Q114	8-729-929-08	s	TRANSISTOR DTC123JE
Q115	8-729-929-08	s	TRANSISTOR DTC123JE
Q116	8-729-929-08	s	TRANSISTOR DTC123JE
Q117	8-729-929-08	s	TRANSISTOR DTC123JE
Q118	8-729-929-08	s	TRANSISTOR DTC123JE
Q119	8-729-929-08	s	TRANSISTOR DTC123JE
Q120	8-729-162-45	s	TRANSISTOR 2SB624-BV5
Q121	8-729-162-45	s	TRANSISTOR 2SB624-BV5
Q122	8-729-162-45	s	TRANSISTOR 2SB624-BV5
Q123	8-729-162-45	s	TRANSISTOR 2SB624-BV5
R1	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)

(SW-1233 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R3	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R4	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R5	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R6	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R11	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R12	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R13	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R14	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R16	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R18	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R20	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R22	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R23	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R24	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R25	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R26	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R27	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R29	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R31	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R34	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R35	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R36	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R37	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R38	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R100	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R101	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R102	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R103	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R104	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R105	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R106	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R107	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R108	1-211-989-11	s	RESISTOR,CHIP 68 1/10W (1608)
R109	1-211-989-11	s	RESISTOR,CHIP 68 1/10W (1608)
R110	1-211-989-11	s	RESISTOR,CHIP 68 1/10W (1608)
R111	1-211-989-11	s	RESISTOR,CHIP 68 1/10W (1608)
R112	1-211-989-11	s	RESISTOR,CHIP 68 1/10W (1608)
R113	1-211-989-11	s	RESISTOR,CHIP 68 1/10W (1608)
R114	1-211-989-11	s	RESISTOR,CHIP 68 1/10W (1608)
R115	1-211-989-11	s	RESISTOR,CHIP 68 1/10W (1608)
R116	1-211-977-11	s	RESISTOR,CHIP 22 1/10W (1608)
R117	1-211-977-11	s	RESISTOR,CHIP 22 1/10W (1608)
R118	1-211-977-11	s	RESISTOR,CHIP 22 1/10W (1608)
R119	1-211-977-11	s	RESISTOR,CHIP 22 1/10W (1608)
R120	1-211-977-11	s	RESISTOR,CHIP 22 1/10W (1608)
R121	1-211-977-11	s	RESISTOR,CHIP 22 1/10W (1608)
R122	1-211-977-11	s	RESISTOR,CHIP 22 1/10W (1608)
R123	1-211-977-11	s	RESISTOR,CHIP 22 1/10W (1608)
R124	1-216-864-11	s	CONDUCTOR, CHIP (1608)
RV1	1-223-741-11	s	RESISTOR, METAL CARBON VAR 50K
RV2	1-223-741-11	s	RESISTOR, METAL CARBON VAR 50K
RV3	1-223-741-11	s	RESISTOR, METAL CARBON VAR 50K
RV4	1-223-741-11	s	RESISTOR, METAL CARBON VAR 50K
RV5	1-223-741-11	s	RESISTOR, METAL CARBON VAR 50K
S1	1-786-840-11	s	SWITCH, ROTARY
S2	1-786-840-11	s	SWITCH, ROTARY
S3	1-786-840-11	s	SWITCH, ROTARY
S4	1-786-840-11	s	SWITCH, ROTARY
S5	1-762-122-11	s	SWITCH, TOGGLE

(SW-1233 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
S6	1-762-122-11	s	SWITCH, TOGGLE
S7	1-762-122-11	s	SWITCH, TOGGLE
S8	1-762-122-11	s	SWITCH, TOGGLE
S9	1-762-123-11	s	SWITCH, TOGGLE
S10	1-762-531-11	s	SWITCH, TOGGLE
S11	1-762-129-11	s	SWITCH, TACTILE (ILLUMINATED)
S12	1-762-129-21	s	SWITCH, TACTILE (ILLUMINATED)
S13	1-762-129-31	s	SWITCH, TACTILE (ILLUMINATED)
S14	1-762-131-11	s	SWITCH, TACTILE (ILLUMINATED)
S15	1-762-132-11	s	SWITCH, TACTILE (ILLUMINATED)
S20	1-762-132-21	s	SWITCH, TACTILE (ILLUMINATED)
S21	1-762-133-11	s	SWITCH, TACTILE (ILLUMINATED)
S22	1-692-994-11	s	SWITCH, TACTILE (ILLUMINATED)
S24	1-762-122-11	s	SWITCH, TOGGLE
S25	1-762-123-11	s	SWITCH, TOGGLE
S26	1-786-839-11	s	SWITCH, PUSH
S27	1-786-839-11	s	SWITCH, PUSH
S29	1-786-839-11	s	SWITCH, PUSH
S30	1-786-839-11	s	SWITCH, PUSH
S31	1-786-839-11	s	SWITCH, PUSH

SW-1236 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
C4	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C5	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C6	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C7	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
CN1	1-779-806-21	s	CONNECTOR, 1.0MM PITCH 8P
CN2	1-770-622-21	s	PIN, CONNECTOR 5P
FB1	1-469-094-21	s	FERRITE, EMI (SMD)
FB2	1-234-518-21	s	ARRAY, FERRITE CHIP
R3	1-216-864-11	s	CONDUCTOR, CHIP (1608)
S1	1-692-112-11	s	SWITCH, TACTIL
S2	1-692-112-11	s	SWITCH, TACTIL

SW-1237 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1099-125-A	s	MOUNTED CIRCUIT BOARD, SW-1237
C1	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C6	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C7	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C8	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C10	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C11	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C12	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C13	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C14	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
CN1	1-779-806-21	s	CONNECTOR, 1.0MM PITCH 8P
CN2	1-793-152-21	o	CONNECTOR 11P
D1	8-719-820-41	s	DIODE 1SS302
IC1	6-702-481-01	s	IC PCA9555DB-118
IC2	8-759-592-42	s	IC TC7SZ00FU(TE85R)
IC3	8-759-592-42	s	IC TC7SZ00FU(TE85R)
R1	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R2	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R3	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R4	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R5	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R6	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R9	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R10	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R18	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R19	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R20	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R21	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
RB1	1-234-375-21	s	RES, NETWORK 1KX4 (1005)
RB3	1-234-380-11	s	RESISTOR,NETWORK 47KX4 (1005)
RB4	1-234-375-21	s	RES, NETWORK 1KX4 (1005)
RB7	1-234-380-11	s	RESISTOR,NETWORK 47KX4 (1005)
RB9	1-234-380-11	s	RESISTOR,NETWORK 47KX4 (1005)
RB10	1-234-380-11	s	RESISTOR,NETWORK 47KX4 (1005)
S1	1-786-725-21	s	SWITCH, TACTILE
S2	1-786-725-21	s	SWITCH, TACTILE
S3	1-786-725-21	s	SWITCH, TACTILE
S4	1-786-725-21	s	SWITCH, TACTILE

SW-1238 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
C1	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
CN1	1-770-619-11	s	PIN, CONNECTOR 2P
R1	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
S1	1-786-725-21	s	SWITCH, TACTILE

SW-1239 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1099-127-A	s	MOUNTED CIRCUIT BOARD, SW-1239
C1	1-127-760-11	s	CAPACITOR,CERAMIC 4.7MF/6.3V
C2	1-127-760-11	s	CAPACITOR,CERAMIC 4.7MF/6.3V
C3	1-127-760-11	s	CAPACITOR,CERAMIC 4.7MF/6.3V
C4	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C5	1-162-966-11	s	CAPACITOR,CERAMIC 2200PF/50V B
C6	1-127-760-11	s	CAPACITOR,CERAMIC 4.7MF/6.3V
C7	1-162-966-11	s	CAPACITOR,CERAMIC 2200PF/50V B
C8	1-127-760-11	s	CAPACITOR,CERAMIC 4.7MF/6.3V
C10	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C11	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C12	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C13	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C14	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C15	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C16	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
CN3	1-770-630-21	s	PIN, CONNECTOR (L TYPE) 13P
FB1	1-234-518-21	s	ARRAY, FERRITE CHIP
FB2	1-234-518-21	s	ARRAY, FERRITE CHIP
IC1	8-759-337-40	s	IC NJM2904V(TE2)
Q1	8-729-927-99	s	TRANSISTOR 2SC4617R
R1	1-218-895-11	s	RESISTOR,CHIP 100K 1/10W(1608)
R2	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R3	1-218-895-11	s	RESISTOR,CHIP 100K 1/10W(1608)
R4	1-218-895-11	s	RESISTOR,CHIP 100K 1/10W(1608)
R5	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R6	1-218-895-11	s	RESISTOR,CHIP 100K 1/10W(1608)
R7	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R8	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)
R9	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)
R10	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)
R11	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)
R12	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)
RV1	1-227-244-11	s	RESISTOR, VAR, CARBON 5K/5K
S1	1-570-282-21	s	SWITCH, KEY BOARD
S2	1-571-416-11	s	SWITCH,TOGGLE
S3	1-571-679-11	s	SWITCH,TOGGLE
S4	1-570-610-11	s	SWITCH,TOGGLE

SW-1240 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1099-128-A	s	MOUNTED CIRCUIT BOARD, SW-1240
C1	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C2	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C3	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C4	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C5	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C6	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C7	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C8	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C9	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C10	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
CN1	1-770-628-11	s	PIN, CONNECTOR 11P
FB1	1-234-518-21	s	ARRAY, FERRITE CHIP
FB2	1-234-518-21	s	ARRAY, FERRITE CHIP
FB3	1-234-518-21	s	ARRAY, FERRITE CHIP
R2	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)
R3	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)
R4	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)
R5	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)
R6	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)
S2	1-762-000-11	s	SWITCH, TOGGLE
S3	1-762-019-11	s	SWITCH, TOGGLE
S4	1-762-000-11	s	SWITCH, TOGGLE
S5	1-762-489-11	s	SWITCH, TOGGLE
S6	1-762-000-11	s	SWITCH, TOGGLE

SW-1241 BOARD (SUFFIX: -15)
---

*A: [HDC1500(J,SY)/HDC1550(UC)/HDC1600(J)]
*B: [HDC1500(CE)/HDC1550(CE)/HDC1580(CN)]

Ref. No. or Q'ty		Part No.	SP	Description
1pc	*A	A-1099-129-A	s	MOUNTED CIRCUIT BOARD, SW-1241
	*B	A-1166-843-A	s	MOUNTED CIRCUIT BOARD, SW-1241B
C1		1-162-964-91	s	CAP,CHIP CERAMIC 1000PF B 1608
C2		1-162-964-91	s	CAP,CHIP CERAMIC 1000PF B 1608
C3		1-107-826-91	s	CAP, CHIP CERAMIC 100000PF B
C4		1-162-964-91	s	CAP,CHIP CERAMIC 1000PF B 1608
C5		1-162-964-91	s	CAP,CHIP CERAMIC 1000PF B 1608
C6		1-162-964-91	s	CAP,CHIP CERAMIC 1000PF B 1608
C7		1-162-964-91	s	CAP,CHIP CERAMIC 1000PF B 1608
C8		1-162-964-91	s	CAP,CHIP CERAMIC 1000PF B 1608
C9		1-162-964-91	s	CAP,CHIP CERAMIC 1000PF B 1608
C10		1-162-964-91	s	CAP,CHIP CERAMIC 1000PF B 1608
C11		1-162-964-91	s	CAP,CHIP CERAMIC 1000PF B 1608
C12		1-107-826-91	s	CAP, CHIP CERAMIC 100000PF B
C13		1-162-927-91	s	CAP, CERAMIC 100PF CH 1608
C14		1-162-927-91	s	CAP, CERAMIC 100PF CH 1608
C15		1-107-826-91	s	CAP, CHIP CERAMIC 100000PF B
C16		1-162-964-91	s	CAP,CHIP CERAMIC 1000PF B 1608
C17		1-162-964-91	s	CAP,CHIP CERAMIC 1000PF B 1608
C18		1-162-964-91	s	CAP,CHIP CERAMIC 1000PF B 1608
C19		1-162-964-91	s	CAP,CHIP CERAMIC 1000PF B 1608
C20		1-162-964-91	s	CAP,CHIP CERAMIC 1000PF B 1608
C21		1-162-964-91	s	CAP,CHIP CERAMIC 1000PF B 1608
CN1		1-784-435-21	o	CONNECTOR, BOARD TO BOARD 30P
D8		8-719-024-83	s	DIODE 1SS301-TE85L
D9		8-719-024-83	s	DIODE 1SS301-TE85L
FB1		1-234-518-21	s	ARRAY, FERRITE CHIP
FB2		1-234-518-21	s	ARRAY, FERRITE CHIP
FB3		1-234-518-21	s	ARRAY, FERRITE CHIP
FB4		1-234-518-21	s	ARRAY, FERRITE CHIP
FB5		1-234-518-21	s	ARRAY, FERRITE CHIP
IC1		6-702-481-01	s	IC PCA9555DB-118
R1		1-216-864-91	s	CONDUCTOR, CHIP (1608)
R2		1-216-864-91	s	CONDUCTOR, CHIP (1608)
R3		1-216-864-91	s	CONDUCTOR, CHIP (1608)
R4		1-216-864-91	s	CONDUCTOR, CHIP (1608)
R5		1-216-864-91	s	CONDUCTOR, CHIP (1608)
R6		1-216-864-91	s	CONDUCTOR, CHIP (1608)
R7		1-218-847-91	s	RES, CHIP 1.0K (1608)
R8		1-218-847-91	s	RES, CHIP 1.0K (1608)
R9		1-211-985-91	s	RES, CHIP 47 (1608)
R10		1-211-985-91	s	RES, CHIP 47 (1608)
R11		1-218-839-91	s	RES, CHIP 470 (1608)
R12		1-218-839-91	s	RES, CHIP 470 (1608)
R13		1-218-990-81	s	CONDUCTOR, CHIP (1005)
R14	*A	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R15	*A	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R16	*B	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R17	*A	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R18	*B	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R23		1-208-887-81	s	RES, CHIP 1.0K (1005)
R24		1-208-887-81	s	RES, CHIP 1.0K (1005)
R25		1-208-887-81	s	RES, CHIP 1.0K (1005)

(SW-1241 BOARD (SUFFIX: -15))

Ref. No. or Q'ty		Part No.	SP	Description
RB1		1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB2		1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB3		1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB4		1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB5		1-234-380-21	s	RES, NETWORK 47K (1005X4)
RB6		1-234-380-21	s	RES, NETWORK 47K (1005X4)
RB7		1-234-380-21	s	RES, NETWORK 47K (1005X4)
RB8		1-234-380-21	s	RES, NETWORK 47K (1005X4)
RV1		1-238-294-11	s	RES, VAR, CARBON 100K
RV2		1-238-294-11	s	RES, VAR, CARBON 100K
RV3		1-238-294-11	s	RES, VAR, CARBON 100K
RV4		1-238-294-11	s	RES, VAR, CARBON 100K
RV5	*A	1-238-294-11	s	RES, VAR, CARBON 100K
RV6		1-238-294-11	s	RES, VAR, CARBON 100K
S3		1-570-608-11	s	SWITCH, TOGGLE
S7		1-570-985-11	s	SWITCH, TOGGLE
S8		1-570-985-11	s	SWITCH, TOGGLE
S9	*A	1-570-608-11	s	SWITCH, TOGGLE
S10		1-570-608-11	s	SWITCH, TOGGLE

SW-1241 BOARD (SUFFIX: -13)

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1099-129-A	s	MOUNTED CIRCUIT BOARD, SW-1241
C1	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C2	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C3	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C4	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C5	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C6	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C7	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C8	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C9	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C10	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C11	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C12	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C13	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C14	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C15	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C16	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C17	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C18	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C19	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C20	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C21	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
CN1	1-784-435-11	o	CONNECTOR, BOARD TO BOARD 30P
D8	8-719-801-78	s	DIODE 1SS184
FB1	1-234-518-21	s	ARRAY, FERRITE CHIP
FB2	1-234-518-21	s	ARRAY, FERRITE CHIP
FB3	1-234-518-21	s	ARRAY, FERRITE CHIP
FB4	1-234-518-21	s	ARRAY, FERRITE CHIP
FB5	1-234-518-21	s	ARRAY, FERRITE CHIP
IC1	6-702-481-01	s	IC PCA9555DB-118
R1	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R2	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R3	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R4	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R5	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R6	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R7	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)
R8	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)
R9	1-211-985-11	s	RESISTOR,CHIP 47 1/10W (1608)
R10	1-211-985-11	s	RESISTOR,CHIP 47 1/10W (1608)
R11	1-218-839-11	s	RESISTOR,CHIP 470 1/10W (1608)
R12	1-218-839-11	s	RESISTOR,CHIP 470 1/10W (1608)
R23	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R24	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R25	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
RB1	1-234-375-21	s	RES, NETWORK 1KX4 (1005)
RB2	1-234-375-21	s	RES, NETWORK 1KX4 (1005)
RB3	1-234-375-21	s	RES, NETWORK 1KX4 (1005)
RB4	1-234-375-21	s	RES, NETWORK 1KX4 (1005)
RB5	1-234-380-11	s	RESISTOR,NETWORK 47KX4 (1005)
RB6	1-234-380-11	s	RESISTOR,NETWORK 47KX4 (1005)
RB7	1-234-380-11	s	RESISTOR,NETWORK 47KX4 (1005)
RB8	1-234-380-11	s	RESISTOR,NETWORK 47KX4 (1005)
RV1	1-238-294-11	s	RESISTOR, VAR,CARBON 100K
RV2	1-238-294-11	s	RESISTOR, VAR,CARBON 100K

(SW-1241 BOARD (SUFFIX: -13))

Ref. No. or Q'ty	Part No.	SP	Description
RV3	1-238-294-11	s	RESISTOR, VAR,CARBON 100K
RV4	1-238-294-11	s	RESISTOR, VAR,CARBON 100K
RV5	1-238-294-11	s	RESISTOR, VAR,CARBON 100K
RV6	1-238-294-11	s	RESISTOR, VAR,CARBON 100K
S3	1-570-608-11	s	SWITCH,TOGGLE
S7	1-570-985-11	s	SWITCH,TOGGLE
S8	1-570-985-11	s	SWITCH,TOGGLE
S9	1-570-608-11	s	SWITCH,TOGGLE
S10	1-570-608-11	s	SWITCH,TOGGLE

SW-1242 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
C1	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C2	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C3	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C4	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
FB1	1-234-518-21	s	ARRAY, FERRITE CHIP
S1	1-786-841-11	s	SWITCH, TOGGLE
S2	1-786-841-11	s	SWITCH, TOGGLE

SW-1245 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
CN1	1-779-884-11	s	PLUG, CONNECTOR 4P
EN1	1-473-315-11	s	ENCODER, ROTARY (SWITCH)

SW-1273 BOARD (SUFFIX: -21)

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1159-986-A	s	MOUNTED CIRCUIT BOARD, SW-1273G
C1	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C6	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C7	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C8	1-162-964-91	s	CAP,CHIP CERAMIC 1000PF B 1608
C9	1-162-964-91	s	CAP,CHIP CERAMIC 1000PF B 1608
C10	1-162-964-91	s	CAP,CHIP CERAMIC 1000PF B 1608
C11	1-162-964-91	s	CAP,CHIP CERAMIC 1000PF B 1608
C12	1-162-964-91	s	CAP,CHIP CERAMIC 1000PF B 1608
C13	1-162-964-91	s	CAP,CHIP CERAMIC 1000PF B 1608
C14	1-162-964-91	s	CAP,CHIP CERAMIC 1000PF B 1608
C15	1-162-964-91	s	CAP,CHIP CERAMIC 1000PF B 1608
C16	1-162-964-91	s	CAP,CHIP CERAMIC 1000PF B 1608
C17	1-162-964-91	s	CAP,CHIP CERAMIC 1000PF B 1608
C18	1-162-964-91	s	CAP,CHIP CERAMIC 1000PF B 1608
C19	1-162-964-91	s	CAP,CHIP CERAMIC 1000PF B 1608
C20	1-162-964-91	s	CAP,CHIP CERAMIC 1000PF B 1608
C21	1-162-964-91	s	CAP,CHIP CERAMIC 1000PF B 1608
CN1	1-816-562-31	s	CONNECTOR, FFC/FPC(ZIF) ST 36P
CN2	1-784-241-21	o	CONNECTOR, BOARD TO BOARD 30P
CN3	1-770-627-21	s	PIN, CONNECTOR 10P
CN4	1-784-254-21	s	CONNECTOR 10P
D1	6-500-936-01	s	DIODE CL-194WE-D-T
D2	6-500-936-01	s	DIODE CL-194WE-D-T
D3	6-500-936-01	s	DIODE CL-194WE-D-T
D4	6-500-936-01	s	DIODE CL-194WE-D-T
D5	6-500-936-01	s	DIODE CL-194WE-D-T
D6	6-500-936-01	s	DIODE CL-194WE-D-T
D7	6-500-936-01	s	DIODE CL-194WE-D-T
D8	6-500-936-01	s	DIODE CL-194WE-D-T
D9	8-719-820-42	s	DIODE 1SS302-TE85L
D10	6-500-936-01	s	DIODE CL-194WE-D-T
D11	6-500-936-01	s	DIODE CL-194WE-D-T
D12	6-500-936-01	s	DIODE CL-194WE-D-T
D13	6-500-936-01	s	DIODE CL-194WE-D-T
D14	6-500-936-01	s	DIODE CL-194WE-D-T
D15	6-500-936-01	s	DIODE CL-194WE-D-T
D16	6-500-936-01	s	DIODE CL-194WE-D-T
D17	6-500-936-01	s	DIODE CL-194WE-D-T
D18	6-500-936-01	s	DIODE CL-194WE-D-T
D19	6-500-936-01	s	DIODE CL-194WE-D-T
D20	6-500-936-01	s	DIODE CL-194WE-D-T
FB1	1-234-518-21	s	ARRAY, FERRITE CHIP
FB2	1-234-518-21	s	ARRAY, FERRITE CHIP
FB3	1-234-518-21	s	ARRAY, FERRITE CHIP
FB4	1-234-518-21	s	ARRAY, FERRITE CHIP
IC1	6-702-481-01	s	IC PCA9555DB-118
Q1	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q2	8-729-928-55	s	TRANSISTOR DTA123JE-TL
R1	1-208-855-81	s	RES, CHIP 47 (1005)
R2	1-208-855-81	s	RES, CHIP 47 (1005)
R3	1-208-883-81	s	RES, CHIP 680 (1005)

(SW-1273 BOARD (SUFFIX: -21))

Ref. No. or Q'ty	Part No.	SP	Description
R4	1-208-883-81	s	RES, CHIP 680 (1005)
R5	1-208-883-81	s	RES, CHIP 680 (1005)
R6	1-208-883-81	s	RES, CHIP 680 (1005)
R7	1-208-883-81	s	RES, CHIP 680 (1005)
R8	1-208-883-81	s	RES, CHIP 680 (1005)
R9	1-208-883-81	s	RES, CHIP 680 (1005)
R10	1-208-883-81	s	RES, CHIP 680 (1005)
R11	1-208-883-81	s	RES, CHIP 680 (1005)
R12	1-208-883-81	s	RES, CHIP 680 (1005)
R13	1-208-883-81	s	RES, CHIP 680 (1005)
R14	1-208-883-81	s	RES, CHIP 680 (1005)
R15	1-208-883-81	s	RES, CHIP 680 (1005)
R16	1-208-883-81	s	RES, CHIP 680 (1005)
R17	1-208-883-81	s	RES, CHIP 680 (1005)
R18	1-208-883-81	s	RES, CHIP 680 (1005)
R19	1-208-883-81	s	RES, CHIP 680 (1005)
R20	1-208-883-81	s	RES, CHIP 680 (1005)
R21	1-208-887-81	s	RES, CHIP 1.0K (1005)
R22	1-208-887-81	s	RES, CHIP 1.0K (1005)
R23	1-208-883-81	s	RES, CHIP 680 (1005)
R28	1-208-927-81	s	RES, CHIP 47K (1005)
RB1	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB2	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB3	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB4	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB6	1-234-380-21	s	RES, NETWORK 47K (1005X4)
RB7	1-234-380-21	s	RES, NETWORK 47K (1005X4)
RB8	1-234-380-21	s	RES, NETWORK 47K (1005X4)
S1	1-786-725-21	s	SWITCH, TACTILE
S2	1-786-725-21	s	SWITCH, TACTILE
S5	1-786-887-11	s	SWITCH,ROTARY
S6	1-786-887-11	s	SWITCH,ROTARY

SW-1273 BOARD (SUFFIX: -13)

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1159-986-A	s	MOUNTED CIRCUIT BOARD,SW-1273G (GOLD)
	A-1099-356-A	s	MOUNTED CIRCUIT BOARD, SW-1273 (SILVER)
C1	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C2	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C3	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C4	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C5	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C6	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C7	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C8	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C9	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C10	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C11	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C12	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C13	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C14	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C15	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C16	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C17	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C18	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C19	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C20	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C21	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
CN1	1-816-562-31	s	CONNECTOR, FFC/FPC(ZIF) ST 36P (GOLD)
	1-816-562-21	s	CONNECTOR, FFC (ZIF) 36P (SILVER)
CN2	1-784-241-11	o	CONNECTOR, BOARD TO BOARD 30P
CN3	1-770-627-21	s	PIN, CONNECTOR 10P
CN4	1-784-254-11	s	CONNECTOR 10P
D1	6-500-936-01	s	DIODE CL-194WE-D-T
D2	6-500-936-01	s	DIODE CL-194WE-D-T
D3	6-500-936-01	s	DIODE CL-194WE-D-T
D4	6-500-936-01	s	DIODE CL-194WE-D-T
D5	6-500-936-01	s	DIODE CL-194WE-D-T
D6	6-500-936-01	s	DIODE CL-194WE-D-T
D7	6-500-936-01	s	DIODE CL-194WE-D-T
D9	8-719-820-41	s	DIODE 1SS302
D10	6-500-936-01	s	DIODE CL-194WE-D-T
D11	6-500-936-01	s	DIODE CL-194WE-D-T
D12	6-500-936-01	s	DIODE CL-194WE-D-T
D13	6-500-936-01	s	DIODE CL-194WE-D-T
D14	6-500-936-01	s	DIODE CL-194WE-D-T
D15	6-500-936-01	s	DIODE CL-194WE-D-T
D16	6-500-936-01	s	DIODE CL-194WE-D-T
FB1	1-234-518-21	s	ARRAY, FERRITE CHIP
FB2	1-234-518-21	s	ARRAY, FERRITE CHIP
FB3	1-234-518-21	s	ARRAY, FERRITE CHIP
FB4	1-234-518-21	s	ARRAY, FERRITE CHIP
IC1	6-702-481-01	s	IC PCA9555DB-118
Q1	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q2	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q3	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q4	8-729-928-55	s	TRANSISTOR DTA123JE-TL
R1	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)

(SW-1273 BOARD (SUFFIX: -13))

Ref. No. or Q'ty	Part No.	SP	Description
R2	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R3	1-208-679-11	s	RESISTOR CHIP 680 1/16W (1005)
R4	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R5	1-208-679-11	s	RESISTOR CHIP 680 1/16W (1005)
R6	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R7	1-208-679-11	s	RESISTOR CHIP 680 1/16W (1005)
R8	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R9	1-208-679-11	s	RESISTOR CHIP 680 1/16W (1005)
R10	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R11	1-208-679-11	s	RESISTOR CHIP 680 1/16W (1005)
R12	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R13	1-208-679-11	s	RESISTOR CHIP 680 1/16W (1005)
R14	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R15	1-208-679-11	s	RESISTOR CHIP 680 1/16W (1005)
R16	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R21	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R22	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R28	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R40	1-208-679-11	s	RESISTOR CHIP 680 1/16W (1005)
R41	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R42	1-208-679-11	s	RESISTOR CHIP 680 1/16W (1005)
R43	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R44	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R45	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R46	1-208-679-11	s	RESISTOR CHIP 680 1/16W (1005)
R47	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R48	1-208-679-11	s	RESISTOR CHIP 680 1/16W (1005)
R49	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R50	1-208-679-11	s	RESISTOR CHIP 680 1/16W (1005)
R51	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R52	1-208-679-11	s	RESISTOR CHIP 680 1/16W (1005)
R53	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
RB1	1-234-380-11	s	RESISTOR,NETWORK 47KX4 (1005)
RB2	1-234-375-21	s	RES, NETWORK 1KX4 (1005)
RB3	1-234-375-21	s	RES, NETWORK 1KX4 (1005)
RB4	1-234-375-21	s	RES, NETWORK 1KX4 (1005)
RB6	1-234-380-11	s	RESISTOR,NETWORK 47KX4 (1005)
RB7	1-234-380-11	s	RESISTOR,NETWORK 47KX4 (1005)
RB8	1-234-380-11	s	RESISTOR,NETWORK 47KX4 (1005)
S1	1-786-725-21	s	SWITCH, TACTILE
S2	1-786-725-21	s	SWITCH, TACTILE
S5	1-786-887-11	s	SWITCH,ROTARY
S6	1-786-887-11	s	SWITCH,ROTARY

TG-243 BOARD
---

*1: [Board No. suffix 14]
*2: [Board No. suffix 21-]

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1159-980-A	s	MOUNTED CIRCUIT BOARD, TG-243G (GOLD)
	A-1101-922-A	s	MOUNTED CIRCUIT BOARD, TG-243 (SILVER)
C1	1-126-391-11	s	CAPACITOR ELECT 47MF/6.3V(105)
C2	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C3	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4	1-165-884-91	s	CAPACITOR, CERAMIC 2.2MF(1608)
C5	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C6	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C7	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C8	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C9	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C10	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C11	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C12	1-164-850-11	s	CAPACITOR,CHIP CERAMIC 10PF/50
C13	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C14	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C15	1-165-872-21	s	CAPACITOR,SOLID ELECT 47MF
C16	1-165-872-21	s	CAPACITOR,SOLID ELECT 47MF
C17	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C18	1-165-872-21	s	CAPACITOR,SOLID ELECT 47MF
C19	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C20	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C21	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C22	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C23	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C24	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C25	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C26	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C27	1-165-884-91	s	CAPACITOR, CERAMIC 2.2MF(1608)
C28	1-165-884-91	s	CAPACITOR, CERAMIC 2.2MF(1608)
C29	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C30	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C31	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C34	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C35	1-126-391-11	s	CAPACITOR ELECT 47MF/6.3V(105)
C36	1-165-884-91	s	CAPACITOR, CERAMIC 2.2MF(1608)
C37	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C38	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C39	1-165-872-21	s	CAPACITOR,SOLID ELECT 47MF
C40	1-165-872-21	s	CAPACITOR,SOLID ELECT 47MF
C41	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C42	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C43	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C44	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C45	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C46	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C49	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C51	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C54	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C55	1-165-884-91	s	CAPACITOR, CERAMIC 2.2MF(1608)
C56	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C57	1-165-872-21	s	CAPACITOR,SOLID ELECT 47MF
C58	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C59	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C60	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)

(TG-243 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C61	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C62	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C63	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C64	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C65	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C66	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C67	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C68	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C69	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C70	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C71	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C72	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C73	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C74	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C75	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C76	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C77	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C78	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C79	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C80	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C81	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C82	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C83	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C84	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C86	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C87	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C88	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C89	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C90	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C91	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C92	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C93	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C94	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C95	1-165-871-11	s	CAPACITOR,ELECT 22MF
C96	1-165-871-11	s	CAPACITOR,ELECT 22MF
C97	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C98	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C99	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C100	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C101	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C102	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C103	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C104	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C105	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C106	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C107	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C108	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C109	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C110	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C111	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C112	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C113	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C114	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C115	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C116	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C117	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C118	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C119	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C120	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(TG-243 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C121	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C122	1-165-871-11	s	CAPACITOR,ELECT 22MF
C123	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C124	1-165-871-11	s	CAPACITOR,ELECT 22MF
C132	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C133	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C134	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C135	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C136	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C137	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C138	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C139	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C140	1-165-871-11	s	CAPACITOR,ELECT 22MF
C141	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C142	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C143	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C144	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C145	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C148	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C153	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C154	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C155	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C156	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C157	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C158	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C159	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C160	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C161	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C162	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C163	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C164	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C165	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C166	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C169	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C174	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C175	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C176	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C177	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C178	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C179	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C180	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C181	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C184	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C189	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C190	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C191	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C192	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C193	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C194	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C195	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C196	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C197	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C198	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C199	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C200	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C201	1-165-884-91	s	CAPACITOR, CERAMIC 2.2MF(1608)
C202	1-164-842-11	s	CAPACITOR CERAMIC 2PF/16V 1005
C205	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C206 *1	1-164-850-81	s	CERAMIC CHIP 10PF 0.50PF 50V
*2	1-164-858-81	s	CERAMIC CHIP 22PF 5.00% 50V

(TG-243 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C207	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C208 *1	1-125-777-81	s	CERAMIC CHIP 0.1UF 10.00% 10V
C209 *1	1-125-777-81	s	CERAMIC CHIP 0.1UF 10.00% 10V
C210 *1	1-125-777-81	s	CERAMIC CHIP 0.1UF 10.00% 10V
CN1	1-778-535-31	s	CONNECTOR, FFC/FPC(ZIF) AN 45P (GOLD)
	1-778-535-11	o	CONNECTOR, FFC (ZIF) 45P (SILVER)
CN2	1-764-080-21	o	PIN, CONNECTOR (PC BOARD) 8P
CN3	1-770-449-21	o	CONNECTOR, BOARD TO BOARD 70P
D1	8-719-989-03	s	DIODE DAN222
E1	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
IC1	6-706-482-01	s	IC TC7SH00FU(T5RSOYJF)
IC2	6-706-482-01	s	IC TC7SH00FU(T5RSOYJF)
IC3	8-759-669-75	s	IC TLC2932IPWR
IC4	6-704-976-01	s	IC ADR381ART-REEL7
IC5	8-759-685-33	s	IC BU2500FV-E2
IC6	6-700-387-01	s	IC EPC2LC20-TP
IC7	8-759-573-97	s	IC SN74LVC541APWR
IC8	8-759-669-69	s	IC TLC7733IPWR-12
IC10	8-759-669-66	s	IC TLC272CPWR
IC11	8-759-327-01	s	IC NJM062V-TE2
IC12	6-706-491-01	s	IC TC7SH86FU(T5RSOYJF)
IC13	6-706-491-01	s	IC TC7SH86FU(T5RSOYJF)
IC14	8-759-327-01	s	IC NJM062V-TE2
IC15	8-759-327-01	s	IC NJM062V-TE2
IC16	8-759-327-01	s	IC NJM062V-TE2
IC18	8-759-585-28	s	IC CY62256VLL-70ZXC-T2
IC19	8-759-327-01	s	IC NJM062V-TE2
IC20	6-706-358-01	s	IC AD5424YCPZ-REEL7
IC21	8-759-561-46	s	IC AD8014ART-REEL7
IC22	6-704-099-01	f	IC TC7WZ08FK(TE85R)
IC23	6-705-673-01	s	IC TC7PA53FU(TE85L.F)
IC24	6-705-673-01	s	IC TC7PA53FU(TE85L.F)
IC25	8-759-561-46	s	IC AD8014ART-REEL7
IC26	8-759-561-46	s	IC AD8014ART-REEL7
IC27	6-704-099-01	f	IC TC7WZ08FK(TE85R)
IC28	6-705-673-01	s	IC TC7PA53FU(TE85L.F)
IC29	6-705-673-01	s	IC TC7PA53FU(TE85L.F)
IC30	8-759-561-46	s	IC AD8014ART-REEL7
IC31	8-759-561-46	s	IC AD8014ART-REEL7
IC32	6-704-099-01	f	IC TC7WZ08FK(TE85R)
IC33	6-705-673-01	s	IC TC7PA53FU(TE85L.F)
IC34	6-705-673-01	s	IC TC7PA53FU(TE85L.F)
IC35	8-759-561-46	s	IC AD8014ART-REEL7
IC36	8-759-561-46	s	IC AD8014ART-REEL7
IC37	8-759-560-62	s	IC TC7WH32FU-TE12R
IC38	8-759-557-86	s	IC NC7SZ86P5X
IC39	6-704-912-01	s	IC CAT24WC256XI-TE13
IC40	8-759-562-42	s	IC CAT24WC08J-TE13
IC41	8-759-669-67	s	IC TL074CPWR-12
IC42	8-759-561-46	s	IC AD8014ART-REEL7
IC43	8-759-561-46	s	IC AD8014ART-REEL7
IC44	8-759-592-47	s	IC TC7SZ08FU(TE85R)
L1	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L2	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L3	1-414-392-31	s	INDUCTOR (SMD) 1.0UH

(TG-243 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
L4	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L5	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L6	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L7	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L8	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L9	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L10	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L12	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L13	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L14	1-414-398-11	s	INDUCTOR (SMD) 10UH
L15	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L16	1-416-948-21	s	COIL, CHOKE (SMD)
L17	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
Q1	8-729-143-13	s	TRANSISTOR 2SC4176-B34
Q2	8-729-143-13	s	TRANSISTOR 2SC4176-B34
Q3	8-729-230-27	s	TRANSISTOR 2SA1213Y-TE12L
Q4	8-729-230-27	s	TRANSISTOR 2SA1213Y-TE12L
Q5	8-729-143-13	s	TRANSISTOR 2SC4176-B34
Q6	8-729-230-27	s	TRANSISTOR 2SA1213Y-TE12L
Q7	8-729-143-13	s	TRANSISTOR 2SC4176-B34
Q8	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q9	8-729-230-27	s	TRANSISTOR 2SA1213Y-TE12L
Q10	8-729-807-51	s	TRANSISTOR 2SD1623-S
Q11	8-729-143-13	s	TRANSISTOR 2SC4176-B34
Q12	8-729-230-27	s	TRANSISTOR 2SA1213Y-TE12L
R1	1-218-961-11	s	RESISTOR, CHIP 4.7K 1/16W
R2	1-218-961-11	s	RESISTOR, CHIP 4.7K 1/16W
R3	1-208-703-11	s	RESISTOR,CHIP 6.8K 1/16W(1005)
R4	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R5	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R6	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R7	1-218-953-11	s	RESISTOR, CHIP 1K 1/16W
R8	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R9	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R10	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R11	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R12	1-208-703-11	s	RESISTOR,CHIP 6.8K 1/16W(1005)
R13	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R14	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R15	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R16	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R17	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R18	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R19	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R20	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R21	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R22	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R23	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R24	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R25	1-243-975-11	s	RESISTOR, CHIP 4.7M
R26	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005
R27	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R28	1-208-703-11	s	RESISTOR,CHIP 6.8K 1/16W(1005)
R29	1-208-679-11	s	RESISTOR CHIP 680 1/16W (1005)
R30	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R31	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R32	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R33	1-208-911-11	s	RESISTOR, CHIP 10K (1005)

(TG-243 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R34	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R35	1-208-713-11	s	RESISTOR CHIP 18K 1/16W (1005)
R36	1-208-709-11	s	RESISTOR CHIP 12K 1/16W (1005)
R37	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R38	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R39	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R40	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R41	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R42	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R43	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R44	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R45	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R46	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R47	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R59	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R60	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R61	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R62	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R63	1-208-893-11	s	RESISTOR, CHIP 1.8K (1005)
R64	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R65	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R66	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R67	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R69	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R70	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R71	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R73	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R74	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R76	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R77	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R79	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R81	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R83	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R84	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R85	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R86	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
*2 R87	1-208-931-81	s	METAL CHIP 68K 0.5% 1/16W
*2 R88	1-208-931-81	s	METAL CHIP 68K 0.5% 1/16W
R99	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R120	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R121	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R122	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R123	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R124	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R125	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R126	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R127	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R128	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R129	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R130	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R131	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R132	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R133	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R134	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R135	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R136	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R137	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R138	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R139	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)

(TG-243 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R140	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R141	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R142	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R143	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R144	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R145	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R146	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R147	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R148	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R149	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R150	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R151	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R153	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R155	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R156	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R157	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R158	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R159	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R160	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R161	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R162	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R163	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R164	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R165	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R166	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R167	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R168	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R169	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R170	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R171	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R172	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R173	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R174	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R175	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R176	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R177	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R178	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R179	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R180	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R181	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R182	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R183	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R184	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R185	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R190	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R196	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R197	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R198	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R202	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R203	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R204	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R205	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R206	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R207	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R208	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R209	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R210	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R212	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R213	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)

(TG-243 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R214	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R215	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R216	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R220	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R222	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R223	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R224	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R225	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R227	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R228	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R229	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R230	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R231	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R232	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R233	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R234	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R235	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R236	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R237	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R238	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R242	1-208-860-11	s	RESISTOR CHIP 75 1/16W (1005)
R243	1-208-647-11	s	RESISTOR CHIP 33 1/16W (1005)
R244	1-208-647-11	s	RESISTOR CHIP 33 1/16W (1005)
R245	1-208-647-11	s	RESISTOR CHIP 33 1/16W (1005)
R246	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R247	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R248	1-208-679-11	s	RESISTOR CHIP 680 1/16W (1005)
R249	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R250	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R251	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R252	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R253	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R254	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R255	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R258	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R259	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R264	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R265	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R266	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R267	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R268	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R269	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R270	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R271	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R272	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R273	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R274	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R275	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R276	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R277	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R278	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R279	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R280	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R281	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R282	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R283	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R284	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R285	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R286	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)

(TG-243 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R288	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R289	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R292	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R293	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R298	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R299	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R300	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R301	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R302	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R303	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R304	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R305	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R306	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R307	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R308	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R309	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R310	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R311	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R312	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R313	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R314	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R315	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R318	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R319	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R324	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R325	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R326	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R327	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R328	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R329	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R330	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R331	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R332	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R333	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R334	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R335	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R336	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R337	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R338	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R339	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R340	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R342	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R343	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R344	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R345	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R346	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R347	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R348	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R349	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R350	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R352	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R353	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R355	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R356	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R358	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R360	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R362	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R363	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R365	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)

(TG-243 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R367	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R369	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R371	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R373	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R375	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R376 *1	1-208-635-11	s	METAL CHIP 10 0.5% 1/16W
*2	1-218-941-11	s	METAL CHIP 100 0.5% 1/16W
R377	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R379	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R381	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R382	1-215-465-00	s	RESISTOR,METAL FILM 68K 1/4W
R383	1-215-465-00	s	RESISTOR,METAL FILM 68K 1/4W
RB1	1-234-370-11	s	RES, NETWORK 22X4 (1005)
S1	1-771-709-31	s	SWITCH, SLIDE
X1	1-813-529-11	s	OSCILLATOR, CRYSTAL (VCXO) 3.3
X2	1-813-530-11	s	OSCILLATOR, CRYSTAL (VCXO) 3.3

TG-243C BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1179-309-A	s	MOUNTED CIRCUIT BOARD, TG-243CG
C1	1-126-391-21	s	CAP, CHIP ELECT 47MF (5X5.7)
C2	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C3	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C5	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C6	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C7	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C8	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C9	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C10	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C11	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C12	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C13	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C14	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C15	1-165-872-21	s	CAP, ELECT 47MF (5.0X6.5)
C16	1-165-872-21	s	CAP, ELECT 47MF (5.0X6.5)
C17	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C18	1-165-872-21	s	CAP, ELECT 47MF (5.0X6.5)
C19	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C20	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C21	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C22	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C23	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C24	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C25	1-126-395-21	s	CAP, CHIP ELECT 22MF (5X5.7)
C26	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C27	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C28	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C29	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C30	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C31	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C34	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C35	1-126-391-21	s	CAP, CHIP ELECT 47MF (5X5.7)
C36	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C38	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C39	1-165-872-21	s	CAP, ELECT 47MF (5.0X6.5)
C40	1-165-872-21	s	CAP, ELECT 47MF (5.0X6.5)
C42	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C43	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C44	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C45	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C46	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C49	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C51	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C54	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C55	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C56	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C57	1-165-872-21	s	CAP, ELECT 47MF (5.0X6.5)
C58	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C59	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C60	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C61	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C62	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C63	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C64	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C65	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C66	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216

(TG-243C BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C67	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C68	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C69	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C70	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C71	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C72	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C73	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C74	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C75	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C76	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C77	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C78	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C79	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C80	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C81	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C82	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C83	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C84	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C86	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C87	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C88	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C89	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C90	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C91	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C92	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C93	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C94	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C95	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C96	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C97	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C98	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C99	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C100	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C101	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C102	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C103	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C104	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C105	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C106	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C107	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C108	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C109	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C110	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C111	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C112	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C113	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C114	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C115	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C116	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C117	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C118	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C119	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C120	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C121	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C122	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C123	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C124	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C132	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C133	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(TG-243C BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C134	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C135	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C136	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C137	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C138	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C139	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C140	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C141	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C142	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C143	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C144	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C145	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C148	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C153	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C154	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C155	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C156	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C157	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C158	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C159	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C160	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C161	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C162	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C163	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C164	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C165	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C166	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C169	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C174	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C175	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C176	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C177	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C178	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C179	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C180	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C181	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C184	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C189	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C190	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C191	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C192	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C193	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C194	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C195	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C196	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C197	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C198	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C199	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C200	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C201	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C202	1-164-842-81	s	CAP,CHIP CERAMIC 2.0PF CK 1005
C205	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C206	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C207	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
CN1	1-778-535-31	s	CONNECTOR, FFC/FPC(ZIF) AN 45P
CN2	1-764-080-21	o	PIN, CONNECTOR (PC BOARD) 8P
CN3	1-770-449-21	o	CONNECTOR, BOARD T1 BOARD 70P
D1	8-719-989-04	s	DIODE DAN222-TL

(TG-243C BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
E1	1-535-877-22	s	CHIP, CHECKER
IC1	6-706-482-01	s	IC TC7SH00FU(T5RSOYJF)
IC2	6-706-482-01	s	IC TC7SH00FU(T5RSOYJF)
IC3	8-759-669-75	s	IC TLC2932IPWRG4
IC4	6-704-976-01	s	IC ADR381ARTZ-REEL7
IC5	8-759-685-34	s	IC M62352AGP-D60Q
IC6	6-700-387-01	s	IC EPC2LC20N-TP
IC7	8-759-573-97	s	IC SN74LVC541APWR
IC8	8-759-669-69	s	IC TLC7733IPWR-12
IC10	8-759-669-66	s	IC TLC272CPWR-12
IC11	8-759-327-01	s	IC NJM062V(TE2)
IC12	6-706-491-01	s	IC TC7SH86FU(T5RSOYJF)
IC14	8-759-327-01	s	IC NJM062V(TE2)
IC15	8-759-327-01	s	IC NJM062V(TE2)
IC16	8-759-327-01	s	IC NJM062V(TE2)
IC18	8-759-585-28	s	IC CY62256VLL-70ZXC-T2
IC19	8-759-327-01	s	IC NJM062V(TE2)
IC20	6-706-358-01	s	IC AD5424YCPZ-REEL7
IC21	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC22	6-704-099-01	s	IC TC7WZ08FK(TE85R)
IC23	6-705-673-01	s	IC TC7PA53FU(TE85L.F)
IC24	6-705-673-01	s	IC TC7PA53FU(TE85L.F)
IC25	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC26	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC27	6-704-099-01	s	IC TC7WZ08FK(TE85R)
IC28	6-705-673-01	s	IC TC7PA53FU(TE85L.F)
IC29	6-705-673-01	s	IC TC7PA53FU(TE85L.F)
IC30	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC31	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC32	6-704-099-01	s	IC TC7WZ08FK(TE85R)
IC33	6-705-673-01	s	IC TC7PA53FU(TE85L.F)
IC34	6-705-673-01	s	IC TC7PA53FU(TE85L.F)
IC35	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC36	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC37	8-759-560-62	s	IC TC7WH32FU(TE12R)
IC38	8-759-557-86	s	IC NC7SZ86P5X
IC39	6-704-912-01	s	IC CAT24WC256XI-TE13
IC41	8-759-669-67	s	IC TL074CPWR-12
IC42	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC43	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC44	8-759-592-47	s	IC TC7SZ08FU(TE85R)
L1	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L2	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L3	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L4	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L5	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L7	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L8	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L9	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L10	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L12	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L13	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L14	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L15	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L16	1-416-948-21	s	COIL, CHOKE 10UH
L17	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
Q1	8-729-144-81	s	TRANSISTOR 2SC4176T1B33B34B35
Q2	8-729-144-81	s	TRANSISTOR 2SC4176T1B33B34B35

(TG-243C BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
Q3	8-729-230-27	s	TRANSISTOR 2SA1213Y-TE12L
Q4	8-729-230-27	s	TRANSISTOR 2SA1213Y-TE12L
Q5	8-729-144-81	s	TRANSISTOR 2SC4176T1B33B34B35
Q6	8-729-230-27	s	TRANSISTOR 2SA1213Y-TE12L
Q7	8-729-144-81	s	TRANSISTOR 2SC4176T1B33B34B35
Q8	8-729-140-86	s	TRANSISTOR 2SA1610-T1Y34
Q9	8-729-230-27	s	TRANSISTOR 2SA1213Y-TE12L
Q10	8-729-209-77	s	TRANSISTOR 2SC2873Y-TE12L
Q11	8-729-144-81	s	TRANSISTOR 2SC4176T1B33B34B35
Q12	8-729-230-27	s	TRANSISTOR 2SA1213Y-TE12L
R1	1-218-961-81	s	RES, CHIP 4.7K
R2	1-218-961-81	s	RES, CHIP 4.7K
R3	1-208-703-11	s	RES, CHIP 6.8K (1005)
R4	1-208-715-11	s	RES, CHIP 22K (1005)
R5	1-208-911-81	s	RES, CHIP 10K (1005)
R6	1-208-911-81	s	RES, CHIP 10K (1005)
R7	1-218-953-81	s	RES, CHIP 1.0K
R8	1-208-911-81	s	RES, CHIP 10K (1005)
R9	1-218-941-11	s	RES, CHIP 100 (1005)
R10	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R11	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R12	1-208-703-11	s	RES, CHIP 6.8K (1005)
R13	1-208-715-11	s	RES, CHIP 22K (1005)
R14	1-218-941-11	s	RES, CHIP 100 (1005)
R15	1-218-941-11	s	RES, CHIP 100 (1005)
R16	1-218-941-11	s	RES, CHIP 100 (1005)
R17	1-218-941-11	s	RES, CHIP 100 (1005)
R18	1-208-683-11	s	RES, CHIP 1.0K (1005)
R19	1-208-643-11	s	RES, CHIP 22 (1005)
R20	1-208-683-11	s	RES, CHIP 1.0K (1005)
R21	1-218-945-11	s	RES, CHIP 220 (1005)
R22	1-208-683-11	s	RES, CHIP 1.0K (1005)
R23	1-218-945-11	s	RES, CHIP 220 (1005)
R24	1-208-715-11	s	RES, CHIP 22K (1005)
R25	1-243-975-81	s	RES, CHIP 4.7M (1005)
R26	1-208-891-81	s	RES, CHIP 1.5K (1005)
R27	1-218-941-11	s	RES, CHIP 100 (1005)
R28	1-208-703-11	s	RES, CHIP 6.8K (1005)
R29	1-208-883-81	s	RES, CHIP 680 (1005)
R30	1-208-927-81	s	RES, CHIP 47K (1005)
R31	1-208-927-81	s	RES, CHIP 47K (1005)
R32	1-208-911-81	s	RES, CHIP 10K (1005)
R33	1-208-911-81	s	RES, CHIP 10K (1005)
R34	1-208-911-81	s	RES, CHIP 10K (1005)
R35	1-208-917-81	s	RES, CHIP 18K (1005)
R36	1-208-913-81	s	RES, CHIP 12K (1005)
R37	1-208-711-11	s	RES, CHIP 15K (1005)
R38	1-208-691-11	s	RES, CHIP 2.2K (1005)
R40	1-208-911-81	s	RES, CHIP 10K (1005)
R41	1-218-941-11	s	RES, CHIP 100 (1005)
R42	1-218-941-11	s	RES, CHIP 100 (1005)
R43	1-208-683-11	s	RES, CHIP 1.0K (1005)
R44	1-218-945-11	s	RES, CHIP 220 (1005)
R45	1-218-945-11	s	RES, CHIP 220 (1005)
R46	1-208-683-11	s	RES, CHIP 1.0K (1005)
R47	1-218-941-11	s	RES, CHIP 100 (1005)
R59	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R60	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R61	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(TG-243C BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R62	1-218-945-11	s	RES, CHIP 220 (1005)
R63	1-208-893-81	s	RES, CHIP 1.8K (1005)
R64	1-208-911-81	s	RES, CHIP 10K (1005)
R65	1-208-911-81	s	RES, CHIP 10K (1005)
R66	1-208-911-81	s	RES, CHIP 10K (1005)
R67	1-208-911-81	s	RES, CHIP 10K (1005)
R69	1-208-911-81	s	RES, CHIP 10K (1005)
R70	1-208-911-81	s	RES, CHIP 10K (1005)
R71	1-208-911-81	s	RES, CHIP 10K (1005)
R72	1-208-911-81	s	RES, CHIP 10K (1005)
R74	1-208-911-81	s	RES, CHIP 10K (1005)
R76	1-208-911-81	s	RES, CHIP 10K (1005)
R77	1-208-911-81	s	RES, CHIP 10K (1005)
R79	1-208-911-81	s	RES, CHIP 10K (1005)
R81	1-208-911-81	s	RES, CHIP 10K (1005)
R82	1-208-911-81	s	RES, CHIP 10K (1005)
R84	1-218-941-11	s	RES, CHIP 100 (1005)
R85	1-218-945-11	s	RES, CHIP 220 (1005)
R86	1-208-643-11	s	RES, CHIP 22 (1005)
R88	1-208-931-81	s	RES, CHIP 68K (1005)
R99	1-208-643-11	s	RES, CHIP 22 (1005)
R120	1-218-941-11	s	RES, CHIP 100 (1005)
R121	1-218-941-11	s	RES, CHIP 100 (1005)
R122	1-208-911-81	s	RES, CHIP 10K (1005)
R123	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R124	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R125	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R126	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R127	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R128	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R129	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R130	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R131	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R132	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R133	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R134	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R135	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R136	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R138	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R139	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R140	1-208-635-11	s	RES, CHIP 10 (1005)
R141	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R142	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R143	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R144	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R145	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R146	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R147	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R148	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R149	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R150	1-218-941-11	s	RES, CHIP 100 (1005)
R151	1-218-941-11	s	RES, CHIP 100 (1005)
R153	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R155	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R156	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R157	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R158	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R159	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R160	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(TG-243C BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R161	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R162	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R163	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R164	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R165	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R166	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R167	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R168	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R169	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R170	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R171	1-208-635-11	s	RES, CHIP 10 (1005)
R172	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R173	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R174	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R175	1-218-945-11	s	RES, CHIP 220 (1005)
R176	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R177	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R178	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R179	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R180	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R181	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R182	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R183	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R184	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R185	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R190	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R196	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R197	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R198	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R202	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R203	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R204	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R205	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R206	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R207	1-208-635-11	s	RES, CHIP 10 (1005)
R208	1-208-635-11	s	RES, CHIP 10 (1005)
R209	1-208-635-11	s	RES, CHIP 10 (1005)
R210	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R212	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R213	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R214	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R215	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R216	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R220	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R222	1-208-911-81	s	RES, CHIP 10K (1005)
R223	1-208-911-81	s	RES, CHIP 10K (1005)
R224	1-218-941-11	s	RES, CHIP 100 (1005)
R225	1-218-941-11	s	RES, CHIP 100 (1005)
R227	1-218-941-11	s	RES, CHIP 100 (1005)
R228	1-218-941-11	s	RES, CHIP 100 (1005)
R229	1-208-715-11	s	RES, CHIP 22K (1005)
R230	1-208-691-11	s	RES, CHIP 2.2K (1005)
R231	1-208-691-11	s	RES, CHIP 2.2K (1005)
R232	1-208-691-11	s	RES, CHIP 2.2K (1005)
R233	1-208-879-81	s	RES, CHIP 470 (1005)
R234	1-208-879-81	s	RES, CHIP 470 (1005)
R235	1-208-879-81	s	RES, CHIP 470 (1005)
R236	1-218-941-11	s	RES, CHIP 100 (1005)
R237	1-218-941-11	s	RES, CHIP 100 (1005)

(TG-243C BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R238	1-218-941-11	s	RES, CHIP 100 (1005)
R242	1-208-860-81	s	RES, CHIP 75 (1005)
R243	1-220-882-81	s	RES, CHIP 33 (1005)
R244	1-220-882-81	s	RES, CHIP 33 (1005)
R245	1-220-882-81	s	RES, CHIP 33 (1005)
R246	1-208-923-81	s	RES, CHIP 33K (1005)
R247	1-208-911-81	s	RES, CHIP 10K (1005)
R248	1-208-883-81	s	RES, CHIP 680 (1005)
R249	1-218-941-11	s	RES, CHIP 100 (1005)
R250	1-208-683-11	s	RES, CHIP 1.0K (1005)
R251	1-208-683-11	s	RES, CHIP 1.0K (1005)
R252	1-208-911-81	s	RES, CHIP 10K (1005)
R253	1-218-941-11	s	RES, CHIP 100 (1005)
R254	1-218-941-11	s	RES, CHIP 100 (1005)
R255	1-218-941-11	s	RES, CHIP 100 (1005)
R258	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R259	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R264	1-208-711-11	s	RES, CHIP 15K (1005)
R265	1-208-635-11	s	RES, CHIP 10 (1005)
R266	1-208-635-11	s	RES, CHIP 10 (1005)
R267	1-208-635-11	s	RES, CHIP 10 (1005)
R268	1-208-635-11	s	RES, CHIP 10 (1005)
R269	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R270	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R271	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R272	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R273	1-208-911-81	s	RES, CHIP 10K (1005)
R274	1-218-941-11	s	RES, CHIP 100 (1005)
R275	1-218-941-11	s	RES, CHIP 100 (1005)
R276	1-218-941-11	s	RES, CHIP 100 (1005)
R277	1-218-941-11	s	RES, CHIP 100 (1005)
R278	1-208-911-81	s	RES, CHIP 10K (1005)
R279	1-208-911-81	s	RES, CHIP 10K (1005)
R280	1-208-635-11	s	RES, CHIP 10 (1005)
R281	1-208-643-11	s	RES, CHIP 22 (1005)
R282	1-208-683-11	s	RES, CHIP 1.0K (1005)
R283	1-208-683-11	s	RES, CHIP 1.0K (1005)
R284	1-208-683-11	s	RES, CHIP 1.0K (1005)
R285	1-208-683-11	s	RES, CHIP 1.0K (1005)
R286	1-218-941-11	s	RES, CHIP 100 (1005)
R288	1-218-941-11	s	RES, CHIP 100 (1005)
R289	1-218-941-11	s	RES, CHIP 100 (1005)
R292	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R293	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R298	1-208-635-11	s	RES, CHIP 10 (1005)
R299	1-208-635-11	s	RES, CHIP 10 (1005)
R300	1-208-635-11	s	RES, CHIP 10 (1005)
R301	1-208-635-11	s	RES, CHIP 10 (1005)
R302	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R303	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R304	1-218-941-11	s	RES, CHIP 100 (1005)
R305	1-218-941-11	s	RES, CHIP 100 (1005)
R306	1-218-941-11	s	RES, CHIP 100 (1005)
R307	1-218-941-11	s	RES, CHIP 100 (1005)
R308	1-208-911-81	s	RES, CHIP 10K (1005)
R309	1-208-911-81	s	RES, CHIP 10K (1005)
R310	1-208-683-11	s	RES, CHIP 1.0K (1005)
R311	1-208-683-11	s	RES, CHIP 1.0K (1005)
R312	1-208-683-11	s	RES, CHIP 1.0K (1005)

(TG-243C BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R313	1-208-683-11	s	RES, CHIP 1.0K (1005)
R314	1-218-941-11	s	RES, CHIP 100 (1005)
R315	1-218-941-11	s	RES, CHIP 100 (1005)
R318	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R319	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R324	1-208-635-11	s	RES, CHIP 10 (1005)
R325	1-208-635-11	s	RES, CHIP 10 (1005)
R326	1-208-635-11	s	RES, CHIP 10 (1005)
R327	1-208-635-11	s	RES, CHIP 10 (1005)
R328	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R329	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R330	1-218-941-11	s	RES, CHIP 100 (1005)
R331	1-218-941-11	s	RES, CHIP 100 (1005)
R332	1-218-941-11	s	RES, CHIP 100 (1005)
R333	1-218-941-11	s	RES, CHIP 100 (1005)
R334	1-208-911-81	s	RES, CHIP 10K (1005)
R335	1-208-911-81	s	RES, CHIP 10K (1005)
R336	1-208-683-11	s	RES, CHIP 1.0K (1005)
R337	1-208-683-11	s	RES, CHIP 1.0K (1005)
R338	1-208-683-11	s	RES, CHIP 1.0K (1005)
R339	1-208-683-11	s	RES, CHIP 1.0K (1005)
R340	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R342	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R343	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R344	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R345	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R346	1-208-683-11	s	RES, CHIP 1.0K (1005)
R347	1-208-715-11	s	RES, CHIP 22K (1005)
R348	1-208-691-11	s	RES, CHIP 2.2K (1005)
R349	1-208-691-11	s	RES, CHIP 2.2K (1005)
R350	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R352	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R353	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R355	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R356	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R358	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R360	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R362	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R363	1-218-941-11	s	RES, CHIP 100 (1005)
R365	1-218-941-11	s	RES, CHIP 100 (1005)
R367	1-218-941-11	s	RES, CHIP 100 (1005)
R369	1-218-941-11	s	RES, CHIP 100 (1005)
R371	1-218-941-11	s	RES, CHIP 100 (1005)
R373	1-218-941-11	s	RES, CHIP 100 (1005)
R375	1-208-911-81	s	RES, CHIP 10K (1005)
R376	1-218-941-11	s	RES, CHIP 100 (1005)
R377	1-208-691-11	s	RES, CHIP 2.2K (1005)
R379	1-208-691-11	s	RES, CHIP 2.2K (1005)
R381	1-208-691-11	s	RES, CHIP 2.2K (1005)
RB1	1-234-370-21	s	RES, NETWORK 22 (1005X4)
S1	1-771-709-41	s	SWITCH, SLIDE
X2	1-813-530-11	s	OSCILLATOR, CRYSTAL (VCXO) 3.3

TG-247 BOARD
---

*1: [Board No. suffix 11]
*2: [Board No. suffix 21-]

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1159-992-A	s	MOUNTED CIRCUIT BOARD, TG-247G (GOLD)
	A-1126-983-A	s	MOUNTED CIRCUIT BOARD, TG-247 (SILVER)
C1	1-126-391-11	s	CAPACITOR ELECT 47MF/6.3V(105)
C2	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C3	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4	1-165-884-91	s	CAPACITOR, CERAMIC 2.2MF(1608)
C5	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C6	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C7	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C8	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C9	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C10	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C11	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C12	1-164-850-11	s	CAPACITOR,CHIP CERAMIC 10PF/50
C13	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C14	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C15	1-165-872-21	s	CAPACITOR,SOLID ELECT 47MF
C16	1-165-872-21	s	CAPACITOR,SOLID ELECT 47MF
C17	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C18	1-165-872-21	s	CAPACITOR,SOLID ELECT 47MF
C19	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C20	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C21	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C22	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C23	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C24	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C25	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C26	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C27	1-165-884-91	s	CAPACITOR, CERAMIC 2.2MF(1608)
C28	1-165-884-91	s	CAPACITOR, CERAMIC 2.2MF(1608)
C29	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C30	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C31	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C32	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C33	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C34	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C35	1-126-391-11	s	CAPACITOR ELECT 47MF/6.3V(105)
C36	1-165-884-91	s	CAPACITOR, CERAMIC 2.2MF(1608)
C37	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C38	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C39	1-165-872-21	s	CAPACITOR,SOLID ELECT 47MF
C40	1-165-872-21	s	CAPACITOR,SOLID ELECT 47MF
C41	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C42	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C43	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C44	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C45	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C46	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C49	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C51	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C54	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C55	1-165-884-91	s	CAPACITOR, CERAMIC 2.2MF(1608)
C56	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C57	1-165-872-21	s	CAPACITOR,SOLID ELECT 47MF
C58	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V

(TG-247 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C59	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C60	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C61	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C62	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C63	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C64	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C65	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C66	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C67	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C68	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C69	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C70	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C71	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C72	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C73	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C74	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C75	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C76	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C77	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C78	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C79	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C80	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C81	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C82	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C83	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C84	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C86	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C87	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C88	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C89	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C90	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C91	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C92	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C93	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C94	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C95	1-165-871-11	s	CAPACITOR,ELECT 22MF
C96	1-165-871-11	s	CAPACITOR,ELECT 22MF
C97	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C98	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C99	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C100	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C101	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C102	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C103	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C104	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C105	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C106	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C107	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C108	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C109	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C110	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C111	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C112	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C113	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C114	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C115	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C116	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C117	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C118	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V

(TG-247 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C119	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C120	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C121	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C122	1-165-871-11	s	CAPACITOR,ELECT 22MF
C123	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C124	1-165-871-11	s	CAPACITOR,ELECT 22MF
C129	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C130	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C131	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C132	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C133	1-165-871-11	s	CAPACITOR,ELECT 22MF
C134	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C135	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C136	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C137	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C138	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C141	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C146	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C147	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C148	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C149	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C150	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C151	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C152	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C153	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C154	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C155	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C156	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C157	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C158	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C159	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C162	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C167	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C168	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C169	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C170	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C171	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C172	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C173	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C174	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C177	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C182	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C183	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C184	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C185	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C186	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C187	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C188	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C189	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C190	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C191	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C192	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C193	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C194	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C195	1-165-884-91	s	CAPACITOR, CERAMIC 2.2MF(1608)
C201	1-164-842-11	s	CAPACITOR CERAMIC 2PF/16V 1005
C202	1-165-908-11	s	CAP, CERAMIC 1MF B 1608
C203	1-165-176-11	s	CAPACITOR,CERAMIC 47000PF/16V
C204	1-165-908-11	s	CAP, CERAMIC 1MF B 1608

(TG-247 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C205	1-165-176-11	s	CAPACITOR,CERAMIC 47000PF/16V
C206	1-165-908-11	s	CAP, CERAMIC 1MF B 1608
C207	1-165-176-11	s	CAPACITOR,CERAMIC 47000PF/16V
C208	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C209	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C210	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C211	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C212	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C213	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C214	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C215	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C216	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C217 *1	1-125-777-81	s	CERAMIC CHIP 0.1UF 10.00% 10V
C218 *1	1-125-777-81	s	CERAMIC CHIP 0.1UF 10.00% 10V
C219 *1	1-125-777-81	s	CERAMIC CHIP 0.1UF 10.00% 10V
C220	1-164-850-11	s	CAPACITOR,CHIP CERAMIC 10PF/50
C221	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
CN1	1-778-451-31	s	CONNECTOR, FFC/FPC(ZIF) AN 50P (GOLD)
	1-778-451-11	o	CONNECTOR, FPC (50P) (SILVER)
CN2	1-764-080-21	o	PIN, CONNECTOR (PC BOARD) 8P
CN3	1-770-449-21	o	CONNECTOR, BOARD TO BOARD 70P
D1	8-719-989-03	s	DIODE DAN222
E1	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
IC1	6-706-482-01	s	IC TC7SH00FU(T5RSOYJF)
IC2	6-706-482-01	s	IC TC7SH00FU(T5RSOYJF)
IC3	8-759-669-75	s	IC TLC2932IPWR
IC4	6-704-976-01	s	IC ADR381ART-REEL7
IC5	8-759-685-33	s	IC BU2500FV-E2
IC6	6-700-387-01	s	IC EPC2LC20-TP
IC7	8-759-573-97	s	IC SN74LVC541APWR
IC8	8-759-669-69	s	IC TLC7733IPWR-12
IC10	8-759-669-66	s	IC TLC272CPWR
IC11	8-759-327-01	s	IC NJM062V-TE2
IC12	6-706-491-01	s	IC TC7SH86FU(T5RSOYJF)
IC13	6-706-491-01	s	IC TC7SH86FU(T5RSOYJF)
IC14	8-759-327-01	s	IC NJM062V-TE2
IC15	8-759-327-01	s	IC NJM062V-TE2
IC16	8-759-327-01	s	IC NJM062V-TE2
IC18	8-759-585-28	s	IC CY62256VLL-70ZXC-T2
IC19	8-759-327-01	s	IC NJM062V-TE2
IC20	6-706-358-01	s	IC AD5424YCPZ-REEL7
IC21	8-759-561-46	s	IC AD8014ART-REEL7
IC22	6-704-099-01	f	IC TC7WZ08FK(TE85R)
IC23	6-705-673-01	s	IC TC7PA53FU(TE85L.F)
IC24	6-705-673-01	s	IC TC7PA53FU(TE85L.F)
IC25	8-759-561-46	s	IC AD8014ART-REEL7
IC26	8-759-561-46	s	IC AD8014ART-REEL7
IC27	6-704-099-01	f	IC TC7WZ08FK(TE85R)
IC28	6-705-673-01	s	IC TC7PA53FU(TE85L.F)
IC29	6-705-673-01	s	IC TC7PA53FU(TE85L.F)
IC30	8-759-561-46	s	IC AD8014ART-REEL7
IC31	8-759-561-46	s	IC AD8014ART-REEL7
IC32	6-704-099-01	f	IC TC7WZ08FK(TE85R)
IC33	6-705-673-01	s	IC TC7PA53FU(TE85L.F)
IC34	6-705-673-01	s	IC TC7PA53FU(TE85L.F)

(TG-247 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC35	8-759-561-46	s	IC AD8014ART-REEL7
IC36	8-759-561-46	s	IC AD8014ART-REEL7
IC37	8-759-560-62	s	IC TC7WH32FU-TE12R
IC38	8-759-557-86	s	IC NC7SZ86P5X
IC39	6-704-912-01	s	IC CAT24WC256XI-TE13
IC40	8-759-562-42	s	IC CAT24WC08J-TE13
IC41	8-759-669-67	s	IC TL074CPWR-12
IC42	8-759-561-46	s	IC AD8014ART-REEL7
IC43	8-759-561-46	s	IC AD8014ART-REEL7
IC44	8-759-327-01	s	IC NJM062V-TE2
IC45	8-759-327-01	s	IC NJM062V-TE2
IC46	6-708-326-01	s	IC TC74HCT4053AFT(EL)
IC47	8-759-592-47	s	IC TC7SZ08FU(TE85R)
L1	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L2	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L3	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L4	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L5	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L6	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L7	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L8	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L9	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L10	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L12	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L13	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L14	1-414-398-11	s	INDUCTOR (SMD) 10UH
L15	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L16	1-416-948-21	s	COIL, CHOKE (SMD)
L17	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
Q1	8-729-143-13	s	TRANSISTOR 2SC4176-B34
Q2	8-729-143-13	s	TRANSISTOR 2SC4176-B34
Q3	8-729-230-27	s	TRANSISTOR 2SA1213Y-TE12L
Q4	8-729-230-27	s	TRANSISTOR 2SA1213Y-TE12L
Q5	8-729-143-13	s	TRANSISTOR 2SC4176-B34
Q6	8-729-230-27	s	TRANSISTOR 2SA1213Y-TE12L
Q7	8-729-143-13	s	TRANSISTOR 2SC4176-B34
Q8	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q9	8-729-230-27	s	TRANSISTOR 2SA1213Y-TE12L
Q10	8-729-807-51	s	TRANSISTOR 2SD1623-S
Q11	8-729-143-13	s	TRANSISTOR 2SC4176-B34
Q12	8-729-230-27	s	TRANSISTOR 2SA1213Y-TE12L
R1	1-218-961-11	s	RESISTOR, CHIP 4.7K 1/16W
R2	1-218-961-11	s	RESISTOR, CHIP 4.7K 1/16W
R3	1-208-703-11	s	RESISTOR,CHIP 6.8K 1/16W(1005)
R4	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R5	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R6	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R7	1-218-953-11	s	RESISTOR, CHIP 1K 1/16W
R8	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R9	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R10	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R11	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005
R12	1-208-703-11	s	RESISTOR,CHIP 6.8K 1/16W(1005)
R13	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R14	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R15	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R16	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)

(TG-247 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R17	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R18	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R19	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R20	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R21	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R22	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R23	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R24	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R25	1-243-975-11	s	RESISTOR, CHIP 4.7M
R26	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005
R27	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R28	1-208-703-11	s	RESISTOR,CHIP 6.8K 1/16W(1005)
R29	1-208-679-11	s	RESISTOR CHIP 680 1/16W (1005)
R30	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R31	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R32	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R33	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R34	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R35	1-208-713-11	s	RESISTOR CHIP 18K 1/16W (1005)
R36	1-208-709-11	s	RESISTOR CHIP 12K 1/16W (1005)
R37	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R38	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R39	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R40	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R41	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R42	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R43	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R44	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R45	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R46	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R47	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R48	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R49	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R50	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R59	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R60	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R61	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R62	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R63	1-208-893-11	s	RESISTOR, CHIP 1.8K (1005)
R64	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R65	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R66	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R67	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R69	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R70	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R71	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R73	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R74	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R76	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R77	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R79	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R81	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R83	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R84	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R85	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R86	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R87 *2	1-208-931-81	s	METAL CHIP 68K 0.5% 1/16W
R88 *2	1-208-931-81	s	METAL CHIP 68K 0.5% 1/16W
R99	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)

(TG-247 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R120	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R121	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R122	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R123	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R124	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R125	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R126	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R127	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R128	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R129	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R130	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R131	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R132	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R133	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R134	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R135	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R136	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R137	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R138	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R139	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R140	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R141	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R142	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R143	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R144	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R145	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R146	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R147	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R148	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R149	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R150	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R151	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R152	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R153	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R155	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R157	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R158	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R159	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R160	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R161	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R162	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R163	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R164	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R165	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R166	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R167	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R168	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R169	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R170	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R171	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R172	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R173	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R174	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R175	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R176	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R177 *1	1-218-945-11	s	METAL CHIP 220 0.5% 1/16W
*2	1-208-875-81	s	METAL CHIP 330 0.5% 1/16W
R178	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R179	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)

(TG-247 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R180	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R181	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R182	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R183	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R184	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R185	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R186	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R187	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005
R188	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R189	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R190	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R194	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R200	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R201	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R202	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R206	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R207	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R208	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R209	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R210	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R211	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R212	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R213	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R214	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R215	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R216	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R217	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R219	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R220	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R221	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R222	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R223	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R227	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R229	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R230	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R231	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R232	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R234	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R235	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R236	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R237	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R238	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R239	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R240	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R241	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R242	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R243	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R244	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R245	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R246	1-208-860-11	s	RESISTOR CHIP 75 1/16W (1005)
R247	1-208-647-11	s	RESISTOR CHIP 33 1/16W (1005)
R248	1-208-647-11	s	RESISTOR CHIP 33 1/16W (1005)
R249	1-208-647-11	s	RESISTOR CHIP 33 1/16W (1005)
R250	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R251	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R252	1-208-679-11	s	RESISTOR CHIP 680 1/16W (1005)
R253	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R254	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R255	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)

(TG-247 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R256	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R257	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R258	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R259	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R262	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R263	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R268	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R269	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R270	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R271	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R272	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R273	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R274	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R275	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R276	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R277	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R278	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R279	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R280	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R281	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R282	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R283	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R284	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R285	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R286	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R287	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R288	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R289	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R290	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R292	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R293	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R294	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R295	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R302	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R303	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R304	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R305	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R306	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R307	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R308	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R309	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R310	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R311	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R312	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R313	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R314	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R315	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R316	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R317	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R318	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R319	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R322	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R323	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R328	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R329	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R330	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R331	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R332	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R333	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)

(TG-247 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R334	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R335	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R336	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R337	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R338	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R339	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R340	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R341	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R342	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R343	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R344	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R345	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R346	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R348	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R350	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R352	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R354	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R358	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R359	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R361	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R363	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R364	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R365	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R367	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R369	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R371	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R373	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R375	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R377	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R379	1-218-985-11	s	RESISTOR CHIP 470K 1/16W(1005)
R380	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R382	1-218-985-11	s	RESISTOR CHIP 470K 1/16W(1005)
R383	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R385	1-218-985-11	s	RESISTOR CHIP 470K 1/16W(1005)
R387	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R388	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R389	1-208-931-11	s	RESISTOR, CHIP 68K (1005)
R390	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R391	1-208-931-11	s	RESISTOR, CHIP 68K (1005)
R392	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R393	1-208-931-11	s	RESISTOR, CHIP 68K (1005)
R394	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R395	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R397	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R399	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R400	1-215-465-00	s	RESISTOR,METAL FILM 68K 1/4W
R401	1-215-465-00	s	RESISTOR,METAL FILM 68K 1/4W
RB1	1-234-370-11	s	RES, NETWORK 22X4 (1005)
S1	1-771-709-31	s	SWITCH, SLIDE
X1	1-813-529-11	s	OSCILLATOR, CRYSTAL (VCXO) 3.3
X2	1-813-530-11	s	OSCILLATOR, CRYSTAL (VCXO) 3.3

TR-136 BOARD
---

*1: [Board No. suffix 13]
*2: [Board No. suffix 14-]

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1142-715-A	s	MOUNTED CIRCUIT BOARD, TR-136
C1	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C2	1-135-342-21	s	CAP, ELECT 56MF (6.3X6)
C3	1-135-342-21	s	CAP, ELECT 56MF (6.3X6)
C4	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C5	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C6	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C7	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C8	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C9	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C10	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C11	1-128-589-21	s	CAP, CHIP ELECT 47MF
C12	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C13	1-128-589-21	s	CAP, CHIP ELECT 47MF
C14	1-128-589-21	s	CAP, CHIP ELECT 47MF
C21	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C22	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C31	1-128-589-21	s	CAP, CHIP ELECT 47MF
C32	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C33	1-128-589-21	s	CAP, CHIP ELECT 47MF
C34	1-128-589-21	s	CAP, CHIP ELECT 47MF
C41	1-125-827-91	s	CAP, CHIP CERAMIC 1MF B
C42	1-100-165-21	s	CAP, ELECT 47MF (8X7)
C43	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C44	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C45	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C46	1-126-394-21	s	CAP, CHIP ELECT 10MF (4X5.7)
C47	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C48	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C49 *1	1-126-394-21	s	ELECT CHIP 10UF 20.00% 16V
*2	1-117-145-21	s	ELECT CHIP 1UF 20.00% 50V
C50	1-100-352-91	s	CAP, CERAMIC 1MF C (1608)
C51	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C52	1-100-165-21	s	CAP, ELECT 47MF (8X7)
C53	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C92	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C93	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C94	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C95	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C101	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C102	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3225
C103	1-164-862-81	s	CAP, CHIP CERAMIC 33PF CH 1005
C104	1-164-862-81	s	CAP, CHIP CERAMIC 33PF CH 1005
C105 *1	1-100-567-81	s	CERAMIC CHIP 10000PF 10% 25V
*2	1-100-506-91	s	CERAMIC CHIP 1UF 20% 6.3V
C106	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C107	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C108	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C109	1-164-882-81	s	CAP,CHIP CERAMIC 220PF CH 1005
C110	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C111	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3225
C112	1-100-352-91	s	CAP, CERAMIC 1MF C (1608)
C113	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3225
C114	1-164-870-81	s	CAP, CHIP CERAMIC 68PF CH 1005
C115	1-164-862-81	s	CAP, CHIP CERAMIC 33PF CH 1005
C116	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005

(TR-136 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C117	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C118	1-164-934-81	s	CAP, CHIP CERAMIC 330PF B 1005
C119	1-164-870-81	s	CAP, CHIP CERAMIC 68PF CH 1005
C120	1-164-882-81	s	CAP,CHIP CERAMIC 220PF CH 1005
C121	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3225
C122	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C126 *1	1-100-055-21	s	CERAMIC CHIP 22UF 20% 16V
*2	1-100-620-91	s	CERAMIC CHIP 47UF 20% 6.3V
C127	1-126-402-21	s	CAP, CHIP ELECT 2.2MF (4X5.7)
C128	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C129	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C130	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C131	1-164-870-81	s	CAP, CHIP CERAMIC 68PF CH 1005
C132	1-164-870-81	s	CAP, CHIP CERAMIC 68PF CH 1005
C133	1-164-862-81	s	CAP, CHIP CERAMIC 33PF CH 1005
C134	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C135	1-164-934-81	s	CAP, CHIP CERAMIC 330PF B 1005
C136	1-164-870-81	s	CAP, CHIP CERAMIC 68PF CH 1005
C137	1-164-882-81	s	CAP,CHIP CERAMIC 220PF CH 1005
C138	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C141 *1	1-100-055-21	s	CERAMIC CHIP 22UF 20% 16V
*2	1-100-620-91	s	CERAMIC CHIP 47UF 20% 6.3V
C142	1-126-402-21	s	CAP, CHIP ELECT 2.2MF (4X5.7)
C143	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C144	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C145	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C146	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C147	1-164-870-81	s	CAP, CHIP CERAMIC 68PF CH 1005
C148	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C149	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C150	1-164-934-81	s	CAP, CHIP CERAMIC 330PF B 1005
C151	1-164-870-81	s	CAP, CHIP CERAMIC 68PF CH 1005
C152	1-164-882-81	s	CAP,CHIP CERAMIC 220PF CH 1005
C153	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C156	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C157	1-117-141-21	s	CAP, ELECT 0.1MF
C158	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C159	1-164-870-81	s	CAP, CHIP CERAMIC 68PF CH 1005
C161	1-164-870-81	s	CAP, CHIP CERAMIC 68PF CH 1005
C162	1-164-870-81	s	CAP, CHIP CERAMIC 68PF CH 1005
C163	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C164	1-164-934-81	s	CAP, CHIP CERAMIC 330PF B 1005
C165	1-164-870-81	s	CAP, CHIP CERAMIC 68PF CH 1005
C166	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C167	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C171	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C172	1-117-141-21	s	CAP, ELECT 0.1MF
C173	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C174	1-164-870-81	s	CAP, CHIP CERAMIC 68PF CH 1005
C175	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C176	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C177	1-164-862-81	s	CAP, CHIP CERAMIC 33PF CH 1005
C178	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C179	1-164-934-81	s	CAP, CHIP CERAMIC 330PF B 1005
C180	1-164-870-81	s	CAP, CHIP CERAMIC 68PF CH 1005
C181	1-164-882-81	s	CAP,CHIP CERAMIC 220PF CH 1005
C182	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C186	1-127-820-91	s	CAP, CHIP CERAMIC 4.7MF B 3216
C187	1-127-820-91	s	CAP, CHIP CERAMIC 4.7MF B 3216

(TR-136 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C188	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C189	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C190	1-127-820-91	s	CAP, CHIP CERAMIC 4.7MF B 3216
C191	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C192	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C193	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3225
C194	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C201	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C202	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C203	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C204	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C205	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C208	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C209	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C210	1-100-620-91	s	CAP, CHIP CERAMIC 47MF B(3225)
C211	1-100-352-91	s	CAP, CERAMIC 1MF C (1608)
C212	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C213	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C214	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C215	1-125-889-91	s	CAP, CHIP CERAMIC 2.2MF B 2012
C217	1-164-882-81	s	CAP,CHIP CERAMIC 220PF CH 1005
C218	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C219	1-164-934-81	s	CAP, CHIP CERAMIC 330PF B 1005
C220	1-164-870-81	s	CAP, CHIP CERAMIC 68PF CH 1005
C221	1-164-870-81	s	CAP, CHIP CERAMIC 68PF CH 1005
C222	1-100-352-91	s	CAP, CERAMIC 1MF C (1608)
C223	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3225
C224	1-100-352-91	s	CAP, CERAMIC 1MF C (1608)
C225	1-127-820-91	s	CAP, CHIP CERAMIC 4.7MF B 3216
C226	1-164-870-81	s	CAP, CHIP CERAMIC 68PF CH 1005
C231	1-100-352-91	s	CAP, CERAMIC 1MF C (1608)
C232	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C233	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C234	1-100-620-91	s	CAP, CHIP CERAMIC 47MF B(3225)
C235	1-100-352-91	s	CAP, CERAMIC 1MF C (1608)
C236	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C237	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C238	1-125-889-91	s	CAP, CHIP CERAMIC 2.2MF B 2012
C239	1-125-889-91	s	CAP, CHIP CERAMIC 2.2MF B 2012
C240	1-164-862-81	s	CAP, CHIP CERAMIC 33PF CH 1005
C241	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C242	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C243	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C245	1-164-934-81	s	CAP, CHIP CERAMIC 330PF B 1005
C246	1-100-352-91	s	CAP, CERAMIC 1MF C (1608)
C247	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C248	1-126-391-21	s	CAP, CHIP ELECT 47MF (5X5.7)
C249	1-164-878-81	s	CAP,CHIP CERAMIC 150PF CH 1005
C256	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C257	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C258	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C259	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C260	1-100-620-91	s	CAP, CHIP CERAMIC 47MF B(3225)
C261	1-100-352-91	s	CAP, CERAMIC 1MF C (1608)
C262	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C263	1-100-620-91	s	CAP, CHIP CERAMIC 47MF B(3225)
C264	1-100-620-91	s	CAP, CHIP CERAMIC 47MF B(3225)
C265	1-125-889-91	s	CAP, CHIP CERAMIC 2.2MF B 2012
C266	1-125-889-91	s	CAP, CHIP CERAMIC 2.2MF B 2012

(TR-136 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C267	1-164-862-81	s	CAP, CHIP CERAMIC 33PF CH 1005
C268	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C269	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C270	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C272	1-164-934-81	s	CAP, CHIP CERAMIC 330PF B 1005
C273	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C274	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C275	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C276	1-164-878-81	s	CAP,CHIP CERAMIC 150PF CH 1005
C281	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C282	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C283	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C284	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C285	1-100-620-91	s	CAP, CHIP CERAMIC 47MF B(3225)
C286	1-100-352-91	s	CAP, CERAMIC 1MF C (1608)
C287	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C288	1-100-620-91	s	CAP, CHIP CERAMIC 47MF B(3225)
C289	1-100-620-91	s	CAP, CHIP CERAMIC 47MF B(3225)
C290	1-125-889-91	s	CAP, CHIP CERAMIC 2.2MF B 2012
C291	1-125-889-91	s	CAP, CHIP CERAMIC 2.2MF B 2012
C292	1-164-862-81	s	CAP, CHIP CERAMIC 33PF CH 1005
C293	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C294	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C295	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C297	1-164-934-81	s	CAP, CHIP CERAMIC 330PF B 1005
C298	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C299	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C300	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C301	1-164-878-81	s	CAP,CHIP CERAMIC 150PF CH 1005
C306	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C307	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C308	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C309	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C310	1-100-620-91	s	CAP, CHIP CERAMIC 47MF B(3225)
C311	1-100-352-91	s	CAP, CERAMIC 1MF C (1608)
C312	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C313	1-100-620-91	s	CAP, CHIP CERAMIC 47MF B(3225)
C314	1-100-620-91	s	CAP, CHIP CERAMIC 47MF B(3225)
C315	1-125-889-91	s	CAP, CHIP CERAMIC 2.2MF B 2012
C316	1-125-889-91	s	CAP, CHIP CERAMIC 2.2MF B 2012
C317	1-164-862-81	s	CAP, CHIP CERAMIC 33PF CH 1005
C318	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C319	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C320	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C322	1-164-934-81	s	CAP, CHIP CERAMIC 330PF B 1005
C323	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C324	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C325	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C326	1-164-878-81	s	CAP,CHIP CERAMIC 150PF CH 1005
C401	1-100-352-91	s	CAP, CERAMIC 1MF C (1608)
C402	1-100-352-91	s	CAP, CERAMIC 1MF C (1608)
C403	1-164-939-81	s	CAP, CHIPCERAMIC 2200PF B 1005
C404	1-164-939-81	s	CAP, CHIPCERAMIC 2200PF B 1005
C405	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C407	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C408	1-127-760-91	s	CAP, CHIP CERAMIC 4.7MF B 2012
C409	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C410	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C411	1-127-760-91	s	CAP, CHIP CERAMIC 4.7MF B 2012

(TR-136 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C412	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C413	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C414	1-127-760-91	s	CAP, CHIP CERAMIC 4.7MF B 2012
C415	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C416	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C417	1-107-826-91	s	CAP, CHIP CERAMIC 100000PF B
C418	1-104-607-21	s	CAP, CHIP ELECT 47MF
C419	1-128-589-21	s	CAP, CHIP ELECT 47MF
C420	1-127-760-91	s	CAP, CHIP CERAMIC 4.7MF B 2012
C422	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C423	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C425	1-128-589-21	s	CAP, CHIP ELECT 47MF
C431	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C432	1-164-939-81	s	CAP, CHIPCERAMIC 2200PF B 1005
C433	1-164-939-81	s	CAP, CHIPCERAMIC 2200PF B 1005
C434	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C435	1-127-760-91	s	CAP, CHIP CERAMIC 4.7MF B 2012
C436	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C437	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C438	1-127-760-91	s	CAP, CHIP CERAMIC 4.7MF B 2012
C439	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C440	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C441	1-127-760-91	s	CAP, CHIP CERAMIC 4.7MF B 2012
C442	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C443	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C444	1-100-352-91	s	CAP, CERAMIC 1MF C (1608)
C445	1-100-352-91	s	CAP, CERAMIC 1MF C (1608)
C451	1-100-352-91	s	CAP, CERAMIC 1MF C (1608)
C452	1-100-352-91	s	CAP, CERAMIC 1MF C (1608)
C453	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C454	1-164-939-81	s	CAP, CHIPCERAMIC 2200PF B 1005
C455	1-164-939-81	s	CAP, CHIPCERAMIC 2200PF B 1005
C456	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C457	1-127-760-91	s	CAP, CHIP CERAMIC 4.7MF B 2012
C458	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C459	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C501	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C502	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C503	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C504	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C505	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C506	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C507	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C508	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C509	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C510	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C511	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C512	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C513	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C514	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C515	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C516	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C517	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C518	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C519	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C520	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C521	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C522	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C523	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(TR-136 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C524	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C525	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C526	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C527	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C528	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C529	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C531	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C532	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C533	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C541	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C542	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C543	1-128-589-21	s	CAP, CHIP ELECT 47MF
C544	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C546	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C547	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C548	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C549	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C550	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C552	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C553	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C554	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C555	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C556	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C557	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C558	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C559	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C560	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C561	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C562	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C563	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C564	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C565	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C566	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C601	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C602	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C603	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C604	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C605	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C606	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C607	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C608	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C609	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C610	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C611	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C612	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C613	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C614	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C615	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C616	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C617	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C618	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C619	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C620	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C621	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C622	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C623	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C624	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C625	1-128-589-21	s	CAP, CHIP ELECT 47MF
C626	1-128-589-21	s	CAP, CHIP ELECT 47MF

(TR-136 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C627	1-128-589-21	s	CAP, CHIP ELECT 47MF
C628	1-128-589-21	s	CAP, CHIP ELECT 47MF
C629	1-128-589-21	s	CAP, CHIP ELECT 47MF
C630	1-128-589-21	s	CAP, CHIP ELECT 47MF
C631	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C632	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C633	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C634	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C635	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C636	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C701	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C702	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C703	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C704	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C705	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C706	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C707	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C708	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C710	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C721	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C722	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C723	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C724	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C725	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C726	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C727	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C728	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C729	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C730	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C731	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C732	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C733	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C734	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C735	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C736	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C737	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C738	1-126-394-21	s	CAP, CHIP ELECT 10MF (4X5.7)
C739	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C761	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C762	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C763	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C764	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C765	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C766	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C767	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C768	1-128-589-21	s	CAP, CHIP ELECT 47MF
C769	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C801	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C802	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C803	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C804	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C805	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C806	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C807	1-164-840-81	s	CAP, CHIP CERAMIC 1PF CK 1005
C808	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C809	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C810	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C811	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C812	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(TR-136 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C813	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C814	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C815	1-165-887-91	s	CAP, CERAMIC 0.22MF (1005)
C816	1-165-887-91	s	CAP, CERAMIC 0.22MF (1005)
C817	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C818	1-165-887-91	s	CAP, CERAMIC 0.22MF (1005)
C819	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C820	1-165-887-91	s	CAP, CERAMIC 0.22MF (1005)
C821	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C822	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C823	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C824	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C825	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C826	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C827	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C828	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C829	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C830	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C831	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C832	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C833	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C834	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C851	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C852	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C853	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C854	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
CF101	1-813-514-11	s	FILTER, CERAMIC (5.6MHZ)
CF102	1-813-515-11	s	FILTER, CERAMIC (6.2MHZ)
CF103	1-813-516-11	s	FILTER, CERAMIC (6.7MHZ)
CF104	1-578-068-12	s	FILTER, CERAMIC
CF105	1-578-069-11	s	FILTER, CERAMIC
CF201	1-760-443-11	s	FILTER, CERAMIC
CF202	1-760-443-11	s	FILTER, CERAMIC
CF203	1-760-444-11	s	FILTER, CERAMIC
CF204	1-760-444-11	s	FILTER, CERAMIC
CF205	1-813-513-11	s	FILTER, CERAMIC (4.3MHZ)
CF206	1-813-513-11	s	FILTER, CERAMIC (4.3MHZ)
CF207	1-813-429-11	s	FILTER, CERAMIC (4.75MHZ)
CF208	1-813-429-11	s	FILTER, CERAMIC (4.75MHZ)
CN2	1-695-930-51	s	CONNECTOR, FPC 16P
CN3	1-764-080-21	o	PIN, CONNECTOR (PC BOARD) 8P
CN101	1-766-703-21	s	CONNECTOR, COAXIAL
CN601	1-766-703-21	s	CONNECTOR, COAXIAL
CN602	1-766-703-21	s	CONNECTOR, COAXIAL
D1	8-719-017-03	s	DIODE 02DZ4.7-TPH3
D2	8-719-017-03	s	DIODE 02DZ4.7-TPH3
D41	8-719-017-03	s	DIODE 02DZ4.7-TPH3
D42	8-719-421-72	s	DIODE MA132WA-TX
D43	8-719-036-65	s	DIODE RD2.0SB-T1
D101	8-719-989-01	s	DIODE DA221-TL
D102	8-719-989-01	s	DIODE DA221-TL
D103	8-719-041-40	s	DIODE KV1470TL00-G
D104	8-719-989-01	s	DIODE DA221-TL
D105	8-719-041-40	s	DIODE KV1470TL00-G
D106	8-719-989-01	s	DIODE DA221-TL
D107	8-719-041-40	s	DIODE KV1470TL00-G
D108	8-719-989-01	s	DIODE DA221-TL
D109	8-719-041-40	s	DIODE KV1470TL00-G

(TR-136 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
D110	8-719-989-01	s	DIODE DA221-TL
D111	8-719-041-40	s	DIODE KV1470TL00-G
D112	8-719-404-50	s	DIODE MA111-TX
D113	8-719-404-50	s	DIODE MA111-TX
D201	8-719-989-01	s	DIODE DA221-TL
D202	8-719-036-65	s	DIODE RD2.0SB-T1
D205	8-719-036-65	s	DIODE RD2.0SB-T1
D208	8-719-036-65	s	DIODE RD2.0SB-T1
D211	8-719-036-65	s	DIODE RD2.0SB-T1
D214	8-719-036-65	s	DIODE RD2.0SB-T1
D401	8-719-036-65	s	DIODE RD2.0SB-T1
D402	8-719-036-65	s	DIODE RD2.0SB-T1
D403	8-719-989-01	s	DIODE DA221-TL
D404	8-719-989-01	s	DIODE DA221-TL
D405	8-719-989-01	s	DIODE DA221-TL
D406	8-719-989-01	s	DIODE DA221-TL
D541	8-719-036-74	s	DIODE RD3.3SB-T1
D542	8-719-036-74	s	DIODE RD3.3SB-T1
D721	8-719-820-42	s	DIODE 1SS302-TE85L
D722	8-719-820-42	s	DIODE 1SS302-TE85L
D761	8-719-104-22	s	DIODE 1SS123-T1
E1	1-535-877-22	s	CHIP, CHECKER
E2	1-535-877-22	s	CHIP, CHECKER
E4	1-535-877-22	s	CHIP, CHECKER
E11	1-535-877-22	s	CHIP, CHECKER
E12	1-535-877-22	s	CHIP, CHECKER
E13	1-535-877-22	s	CHIP, CHECKER
E200	1-535-877-22	s	CHIP, CHECKER
FL201	1-234-905-11	s	FILTER, LOW PASS (4.85MHZ)
FL202	1-239-941-21	s	FILTER, BAND PASS
FL601	1-234-968-11	s	FILTER,LOW PASS
FL602	1-234-971-11	s	FILTER,LOW PASS
IC1	8-759-327-01	s	IC NJM062V(TE2)
IC11	6-700-655-01	s	IC LT1963ES8#TR
IC21	8-759-371-78	s	IC LT1431CS8-E1
IC31	6-700-655-01	s	IC LT1963ES8#TR
IC41	8-759-327-01	s	IC NJM062V(TE2)
IC42	8-759-371-78	s	IC LT1431CS8-E1
IC61	8-759-256-43	s	IC NJM2903M-TE2
IC63	8-759-256-43	s	IC NJM2903M-TE2
IC92	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC93	8-759-363-26	s	IC RN5VD28AA-TL-FA
IC94	8-759-346-27	s	IC LM45BIM3X
IC101	6-706-492-01	s	IC TC7SHU04FU(T5RSOJF)
IC102	8-759-530-31	s	IC TC74VHC4040FT(EL)
IC103	6-707-871-01	s	IC TC74VHC164FT(EKJ)
IC104	8-759-592-44	s	IC TC7SZ04FU(TE85R)
IC105	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC106	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC201	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC202	8-759-811-40	s	IC LA1140-E
IC203	8-759-277-98	s	IC TA75S393F-TE85R
IC204	8-759-811-40	s	IC LA1140-E
IC205	8-759-327-01	s	IC NJM062V(TE2)
IC206	8-759-811-40	s	IC LA1140-E
IC207	8-759-327-01	s	IC NJM062V(TE2)
IC208	8-759-811-40	s	IC LA1140-E

(TR-136 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC209	8-759-327-01	s	IC NJM062V(TE2)
IC210	8-759-811-40	s	IC LA1140-E
IC211	8-759-327-01	s	IC NJM062V(TE2)
IC401	8-759-647-71	s	IC AK4550VT-E2
IC402	8-759-327-01	s	IC NJM062V(TE2)
IC404	8-759-327-01	s	IC NJM062V(TE2)
IC405	8-759-083-42	s	IC TC4W53FU(TE12R)
IC406	8-759-647-71	s	IC AK4550VT-E2
IC407	8-759-327-01	s	IC NJM062V(TE2)
IC408	8-759-647-71	s	IC AK4550VT-E2
IC410	8-759-083-42	s	IC TC4W53FU(TE12R)
IC531	8-759-472-43	s	IC 74VHC245MTCX
IC532	8-759-472-43	s	IC 74VHC245MTCX
IC533	8-759-679-05	s	IC TC7WH34FU(TE12R)
IC541 *1	8-759-824-76	s	IC TLC2934IPWR
*2	6-709-647-01	s	IC TLC2932AIPWR
IC542 *1	8-759-824-76	s	IC TLC2934IPWR
*2	6-709-647-01	s	IC TLC2932AIPWR
IC543	8-759-669-66	s	IC TLC272CPWR-12
IC545	8-759-564-49	s	IC TC7W53FU(TE12R)
IC546	8-759-592-48	s	IC TC7SZ32FU(TE85R)
IC601	8-759-531-92	s	IC TC7WH04FU(TE12R)
IC602	6-700-804-01	s	IC SN74LVC574APWR
IC603	6-700-804-01	s	IC SN74LVC574APWR
IC604	6-700-804-01	s	IC SN74LVC574APWR
IC605	6-700-801-01	s	IC DAC902E/2K5
IC606	6-700-801-01	s	IC DAC902E/2K5
IC607	6-706-863-01	s	IC LMH6732MFX/NOPB
IC608	6-706-863-01	s	IC LMH6732MFX/NOPB
IC701	8-759-679-05	s	IC TC7WH34FU(TE12R)
IC702	8-759-472-43	s	IC 74VHC245MTCX
IC703 *1	8-759-295-09	s	IC TLC2932IPW
*2	6-709-647-01	s	IC TLC2932AIPWR
IC721	8-759-485-24	s	IC MC74HC4046ADTR2
IC722	8-759-669-66	s	IC TLC272CPWR-12
IC725	8-759-592-44	s	IC TC7SZ04FU(TE85R)
IC727	8-759-592-44	s	IC TC7SZ04FU(TE85R)
IC728	8-759-669-41	s	IC SN74LVC125APWR-12
IC729	8-759-531-92	s	IC TC7WH04FU(TE12R)
IC761	8-759-669-66	s	IC TLC272CPWR-12
IC763	8-759-523-04	s	IC TC74HC4538AFT(EL)
IC801	8-759-447-20	s	IC AD8041ARZ-REEL
IC802	8-759-669-66	s	IC TLC272CPWR-12
IC803	8-759-447-20	s	IC AD8041ARZ-REEL
IC805	8-759-287-55	s	IC TC7S66FU(TE85R)
IC806	6-703-741-01	s	IC ADS828E/1K
IC807	8-759-347-09	s	IC NJU7034V-TE2
IC851	6-700-804-01	s	IC SN74LVC574APWR
IC852	6-700-804-01	s	IC SN74LVC574APWR
IC853	6-700-804-01	s	IC SN74LVC574APWR
IC854	8-759-592-48	s	IC TC7SZ32FU(TE85R)
JC1	1-218-990-81	s	CONDUCTOR, CHIP (1005)
JC2	1-218-990-81	s	CONDUCTOR, CHIP (1005)
JC101	1-218-990-81	s	CONDUCTOR, CHIP (1005)
JC102	1-218-990-81	s	CONDUCTOR, CHIP (1005)
JC103	1-218-990-81	s	CONDUCTOR, CHIP (1005)
JC104	1-218-990-81	s	CONDUCTOR, CHIP (1005)
L1	1-416-510-21	s	COIL, CHOKE 100UH

(TR-136 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
L2	1-416-510-21	s	COIL, CHOKE 100UH
L11	1-416-345-21	s	COIL, CHOKE 22UH
L21	1-414-752-91	s	INDUCTOR 2.2UH
L31	1-416-345-21	s	COIL, CHOKE 22UH
L41	1-416-510-21	s	COIL, CHOKE 100UH
L101	1-414-754-91	s	INDUCTOR 10.0UH
L102 *1	1-414-404-41	s	INDUCTOR 100UH
L103 *1	1-414-404-41	s	INDUCTOR 100UH
L104	1-414-404-41	s	INDUCTOR (SMD) 100.0UH
L105	1-414-404-41	s	INDUCTOR (SMD) 100.0UH
L106	1-414-754-91	s	INDUCTOR 10.0UH
L201	1-414-754-91	s	INDUCTOR 10.0UH
L202	1-414-754-91	s	INDUCTOR 10.0UH
L203	1-414-754-91	s	INDUCTOR 10.0UH
L204	1-414-754-91	s	INDUCTOR 10.0UH
L205	1-400-536-11	s	INDUCTOR 100UH
L206	1-414-754-91	s	INDUCTOR 10.0UH
L207	1-414-754-91	s	INDUCTOR 10.0UH
L208	1-400-536-11	s	INDUCTOR 100UH
L209	1-414-754-91	s	INDUCTOR 10.0UH
L210	1-414-754-91	s	INDUCTOR 10.0UH
L211	1-400-534-11	s	INDUCTOR 68UH
L212	1-414-754-91	s	INDUCTOR 10.0UH
L213	1-414-754-91	s	INDUCTOR 10.0UH
L214	1-400-534-11	s	INDUCTOR 68UH
L215	1-400-536-11	s	INDUCTOR 100UH
L401	1-414-754-91	s	INDUCTOR 10.0UH
L402	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L403	1-414-754-91	s	INDUCTOR 10.0UH
L404	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L405	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L406	1-414-754-91	s	INDUCTOR 10.0UH
L501	1-412-935-21	s	INDUCTOR 0.47UH (2520)
L502	1-412-935-21	s	INDUCTOR 0.47UH (2520)
L503	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L511	1-412-935-21	s	INDUCTOR 0.47UH (2520)
L512	1-412-935-21	s	INDUCTOR 0.47UH (2520)
L541	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L542	1-414-404-41	s	INDUCTOR (SMD) 100.0UH
L543	1-414-404-41	s	INDUCTOR (SMD) 100.0UH
L546	1-412-935-21	s	INDUCTOR 0.47UH (2520)
L547	1-412-971-41	s	INDUCTOR, SMALL TYPE 0.22UH
L548	1-412-971-41	s	INDUCTOR, SMALL TYPE 0.22UH
L601	1-412-935-21	s	INDUCTOR 0.47UH (2520)
L602	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L603	1-412-935-21	s	INDUCTOR 0.47UH (2520)
L604	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L605	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L606	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L607	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L608	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L609	1-414-404-41	s	INDUCTOR (SMD) 100.0UH
L610	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L611	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L701	1-414-404-41	s	INDUCTOR (SMD) 100.0UH
L721	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L722	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L723	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L724	1-414-392-41	s	INDUCTOR (SMD) 1.0UH

(TR-136 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
L725	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L761	1-414-400-41	s	INDUCTOR (SMD) 22.0UH
L801	1-414-752-91	s	INDUCTOR 2.2UH
L802	1-414-752-91	s	INDUCTOR 2.2UH
LV101	1-409-826-21	s	COIL, VARIABLE
LV102	1-409-825-21	s	COIL, VARIABLE
LV103	1-409-825-21	s	COIL, VARIABLE
LV104	1-409-825-21	s	COIL, VARIABLE
LV105	1-409-825-21	s	COIL, VARIABLE
LV202	1-409-829-21	s	COIL, TUNING
LV203	1-409-829-21	s	COIL, TUNING
LV204	1-409-828-21	s	COIL, TUNING
LV205	1-409-831-21	s	COIL, TUNING
LV206	1-409-830-21	s	COIL, TUNING
LV207	1-409-833-21	s	COIL, TUNING
LV208	1-409-832-21	s	COIL, TUNING
LV209	1-456-874-11	s	COIL, TUNING (4.75MHZ)
LV210	1-456-873-11	s	COIL, TUNING (4.75MHZ)
Q1	8-729-209-73	s	TRANSISTOR 2SA1213Y-TE12L
Q2	8-729-209-77	s	TRANSISTOR 2SC2873Y-TE12L
Q41	8-729-209-73	s	TRANSISTOR 2SA1213Y-TE12L
Q42	8-729-209-73	s	TRANSISTOR 2SA1213Y-TE12L
Q101	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q102	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q103	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q104	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q105	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q106	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q107	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q108	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q109	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q110	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q111	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q112	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q113	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q114	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q115	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q116	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q117	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q201	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q202	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q401	8-729-140-67	s	TRANSISTOR 2SC4177-T1L5L6
Q541	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q542	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q543	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q721	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q722	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q761	8-729-142-11	s	TRANSISTOR 2SA1226-T1E3E4
Q801	8-729-403-30	s	TRANSISTOR XN6435-TX
Q802	8-729-403-33	s	TRANSISTOR XN6534-TX
R1	1-208-871-81	s	RES, CHIP 220 (1005)
R2	1-208-875-81	s	RES, CHIP 330 (1005)
R3	1-208-919-81	s	RES, CHIP 22K (1005)
R4	1-208-915-81	s	RES, CHIP 15K (1005)
R5	1-208-903-81	s	RES, CHIP 4.7K (1005)
R6	1-208-923-81	s	RES, CHIP 33K (1005)
R7	1-208-927-81	s	RES, CHIP 47K (1005)
R8	1-208-927-81	s	RES, CHIP 47K (1005)

(TR-136 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R9	1-208-919-81	s	RES, CHIP 22K (1005)
R11	1-208-895-81	s	RES, CHIP 2.2K (1005)
R12	1-208-887-81	s	RES, CHIP 1.0K (1005)
R13	1-208-887-81	s	RES, CHIP 1.0K (1005)
R14	1-208-895-81	s	RES, CHIP 2.2K (1005)
R15	1-208-903-81	s	RES, CHIP 4.7K (1005)
R21	1-208-871-81	s	RES, CHIP 220 (1005)
R31	1-208-879-81	s	RES, CHIP 470 (1005)
R32	1-208-887-81	s	RES, CHIP 1.0K (1005)
R33	1-208-855-81	s	RES, CHIP 47 (1005)
R34	1-208-903-81	s	RES, CHIP 4.7K (1005)
R43	1-208-871-81	s	RES, CHIP 220 (1005)
R45	1-208-871-81	s	RES, CHIP 220 (1005)
R46	1-208-935-81	s	RES, CHIP 100K (1005)
R47	1-208-875-81	s	RES, CHIP 330 (1005)
R48	1-208-923-81	s	RES, CHIP 33K (1005)
R49	1-208-927-81	s	RES, CHIP 47K (1005)
R50	1-208-923-81	s	RES, CHIP 33K (1005)
R51	1-208-923-81	s	RES, CHIP 33K (1005)
R53	1-208-927-81	s	RES, CHIP 47K (1005)
R54	1-208-911-81	s	RES, CHIP 10K (1005)
R55	1-208-911-81	s	RES, CHIP 10K (1005)
R56	1-208-911-81	s	RES, CHIP 10K (1005)
R61	1-208-927-81	s	RES, CHIP 47K (1005)
R62	1-208-927-81	s	RES, CHIP 47K (1005)
R63	1-208-911-81	s	RES, CHIP 10K (1005)
R64	1-208-907-81	s	RES, CHIP 6.8K (1005)
R65	1-208-923-81	s	RES, CHIP 33K (1005)
R66	1-208-895-81	s	RES, CHIP 2.2K (1005)
R67	1-208-915-81	s	RES, CHIP 15K (1005)
R68	1-208-915-81	s	RES, CHIP 15K (1005)
R69	1-208-919-81	s	RES, CHIP 22K (1005)
R70	1-208-895-81	s	RES, CHIP 2.2K (1005)
R71	1-208-911-81	s	RES, CHIP 10K (1005)
R72	1-208-895-81	s	RES, CHIP 2.2K (1005)
R73	1-208-915-81	s	RES, CHIP 15K (1005)
R74	1-208-911-81	s	RES, CHIP 10K (1005)
R78	1-208-895-81	s	RES, CHIP 2.2K (1005)
R91	1-208-863-81	s	RES, CHIP 100 (1005)
R92	1-208-863-81	s	RES, CHIP 100 (1005)
R93	*2 1-208-911-81	s	METAL CHIP 10K 0.5% 1/16W
R94	1-208-927-81	s	RES, CHIP 47K (1005)
R95	1-208-927-81	s	RES, CHIP 47K (1005)
R96	1-208-863-81	s	RES, CHIP 100 (1005)
R97	1-208-911-81	s	RES, CHIP 10K (1005)
R98	1-208-863-81	s	RES, CHIP 100 (1005)
R99	1-208-911-81	s	RES, CHIP 10K (1005)
R100	1-208-911-81	s	RES, CHIP 10K (1005)
R101	1-208-923-81	s	RES, CHIP 33K (1005)
R102	1-208-907-81	s	RES, CHIP 6.8K (1005)
R103	1-208-919-81	s	RES, CHIP 22K (1005)
R104	1-243-975-81	s	RES, CHIP 4.7M (1005)
R105	1-243-975-81	s	RES, CHIP 4.7M (1005)
R106	1-208-947-81	s	RES, CHIP 330K (1005)
R108	1-208-935-81	s	RES, CHIP 100K (1005)
R109	1-208-935-81	s	RES, CHIP 100K (1005)
R111	1-208-935-81	s	RES, CHIP 100K (1005)
R112	1-208-935-81	s	RES, CHIP 100K (1005)
R113	1-208-879-81	s	RES, CHIP 470 (1005)

(TR-136 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R114	1-208-895-81	s	RES, CHIP 2.2K (1005)
R115	1-208-935-81	s	RES, CHIP 100K (1005)
R116	1-208-959-81	s	RES, CHIP 1M (1005)
R117	1-208-943-81	s	RES, CHIP 220K (1005)
R118	1-208-915-81	s	RES, CHIP 15K (1005)
R119	1-208-899-81	s	RES, CHIP 3.3K (1005)
R120	1-208-935-81	s	RES, CHIP 100K (1005)
R121	1-208-915-81	s	RES, CHIP 15K (1005)
R122	1-208-911-81	s	RES, CHIP 10K (1005)
R123	1-208-919-81	s	RES, CHIP 22K (1005)
R124	1-208-919-81	s	RES, CHIP 22K (1005)
R125	1-208-919-81	s	RES, CHIP 22K (1005)
R126	1-208-923-81	s	RES, CHIP 33K (1005)
R127	1-208-883-81	s	RES, CHIP 680 (1005)
R128	1-208-895-81	s	RES, CHIP 2.2K (1005)
R129	1-208-923-81	s	RES, CHIP 33K (1005)
R130	1-208-931-81	s	RES, CHIP 68K (1005)
R131	1-208-903-81	s	RES, CHIP 4.7K (1005)
R132	1-208-883-81	s	RES, CHIP 680 (1005)
R133	1-208-903-81	s	RES, CHIP 4.7K (1005)
R134	1-208-903-81	s	RES, CHIP 4.7K (1005)
R135	1-208-883-81	s	RES, CHIP 680 (1005)
R136	1-208-919-81	s	RES, CHIP 22K (1005)
R137	1-208-863-81	s	RES, CHIP 100 (1005)
R138	1-208-919-81	s	RES, CHIP 22K (1005)
R139	1-208-863-81	s	RES, CHIP 100 (1005)
R141	1-208-907-81	s	RES, CHIP 6.8K (1005)
R142	1-208-899-81	s	RES, CHIP 3.3K (1005)
R143	1-208-935-81	s	RES, CHIP 100K (1005)
R144	1-208-913-81	s	RES, CHIP 12K (1005)
R145	1-208-927-81	s	RES, CHIP 47K (1005)
R146	1-208-911-81	s	RES, CHIP 10K (1005)
R147	1-208-899-81	s	RES, CHIP 3.3K (1005)
R148	1-208-915-81	s	RES, CHIP 15K (1005)
R149	1-208-919-81	s	RES, CHIP 22K (1005)
R150	1-208-919-81	s	RES, CHIP 22K (1005)
R151	1-208-911-81	s	RES, CHIP 10K (1005)
R152	1-208-927-81	s	RES, CHIP 47K (1005)
R153	1-208-883-81	s	RES, CHIP 680 (1005)
R154	1-208-895-81	s	RES, CHIP 2.2K (1005)
R155	1-208-907-81	s	RES, CHIP 6.8K (1005)
R156	1-208-917-81	s	RES, CHIP 18K (1005)
R157	1-208-895-81	s	RES, CHIP 2.2K (1005)
R158	1-208-879-81	s	RES, CHIP 470 (1005)
R159	1-208-879-81	s	RES, CHIP 470 (1005)
R166	1-208-907-81	s	RES, CHIP 6.8K (1005)
R167	1-208-899-81	s	RES, CHIP 3.3K (1005)
R168	1-208-935-81	s	RES, CHIP 100K (1005)
R169	1-208-913-81	s	RES, CHIP 12K (1005)
R170	1-208-927-81	s	RES, CHIP 47K (1005)
R171	1-208-911-81	s	RES, CHIP 10K (1005)
R172	1-208-899-81	s	RES, CHIP 3.3K (1005)
R173	1-208-915-81	s	RES, CHIP 15K (1005)
R174	1-208-919-81	s	RES, CHIP 22K (1005)
R175	1-208-919-81	s	RES, CHIP 22K (1005)
R176	1-208-911-81	s	RES, CHIP 10K (1005)
R177	1-208-927-81	s	RES, CHIP 47K (1005)
R178	1-208-883-81	s	RES, CHIP 680 (1005)
R179	1-208-895-81	s	RES, CHIP 2.2K (1005)

(TR-136 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R180	1-208-923-81	s	RES, CHIP 33K (1005)
R181	1-208-931-81	s	RES, CHIP 68K (1005)
R182	1-208-903-81	s	RES, CHIP 4.7K (1005)
R183	1-208-879-81	s	RES, CHIP 470 (1005)
R184	1-208-879-81	s	RES, CHIP 470 (1005)
R191	1-208-899-81	s	RES, CHIP 3.3K (1005)
R192	1-208-903-81	s	RES, CHIP 4.7K (1005)
R193	1-208-935-81	s	RES, CHIP 100K (1005)
R194	1-208-913-81	s	RES, CHIP 12K (1005)
R195	1-208-911-81	s	RES, CHIP 10K (1005)
R196	1-208-927-81	s	RES, CHIP 47K (1005)
R197	1-208-903-81	s	RES, CHIP 4.7K (1005)
R198	1-208-919-81	s	RES, CHIP 22K (1005)
R199	1-208-919-81	s	RES, CHIP 22K (1005)
R200	1-208-911-81	s	RES, CHIP 10K (1005)
R201	1-208-927-81	s	RES, CHIP 47K (1005)
R202	1-208-883-81	s	RES, CHIP 680 (1005)
R203	1-208-895-81	s	RES, CHIP 2.2K (1005)
R204	1-208-907-81	s	RES, CHIP 6.8K (1005)
R205	1-208-917-81	s	RES, CHIP 18K (1005)
R206	1-208-895-81	s	RES, CHIP 2.2K (1005)
R207	1-208-879-81	s	RES, CHIP 470 (1005)
R208	1-208-879-81	s	RES, CHIP 470 (1005)
R216	1-208-899-81	s	RES, CHIP 3.3K (1005)
R217	1-208-903-81	s	RES, CHIP 4.7K (1005)
R218	1-208-935-81	s	RES, CHIP 100K (1005)
R219	1-208-913-81	s	RES, CHIP 12K (1005)
R220	1-208-911-81	s	RES, CHIP 10K (1005)
R221	1-208-927-81	s	RES, CHIP 47K (1005)
R222	1-208-903-81	s	RES, CHIP 4.7K (1005)
R223	1-208-919-81	s	RES, CHIP 22K (1005)
R224	1-208-919-81	s	RES, CHIP 22K (1005)
R225	1-208-907-81	s	RES, CHIP 6.8K (1005)
R227	1-208-883-81	s	RES, CHIP 680 (1005)
R228	1-208-899-81	s	RES, CHIP 3.3K (1005)
R229	1-208-915-81	s	RES, CHIP 15K (1005)
R230	1-208-907-81	s	RES, CHIP 6.8K (1005)
R231	1-208-917-81	s	RES, CHIP 18K (1005)
R232	1-208-895-81	s	RES, CHIP 2.2K (1005)
R233	1-208-879-81	s	RES, CHIP 470 (1005)
R234	1-208-879-81	s	RES, CHIP 470 (1005)
R241	1-208-923-81	s	RES, CHIP 33K (1005)
R242	1-208-923-81	s	RES, CHIP 33K (1005)
R243	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R244	1-208-891-81	s	RES, CHIP 1.5K (1005)
R245	1-220-256-91	s	RES, SQUARE TYPE CHIP 75(3225)
R246	1-208-887-81	s	RES, CHIP 1.0K (1005)
R247	1-208-887-81	s	RES, CHIP 1.0K (1005)
R248	1-208-887-81	s	RES, CHIP 1.0K (1005)
R249	1-208-931-81	s	RES, CHIP 68K (1005)
R250	1-208-931-81	s	RES, CHIP 68K (1005)
R251	1-208-895-81	s	RES, CHIP 2.2K (1005)
R252	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R253	1-208-883-81	s	RES, CHIP 680 (1005)
R261	1-208-887-81	s	RES, CHIP 1.0K (1005)
R262	1-208-887-81	s	RES, CHIP 1.0K (1005)
R265	1-208-927-81	s	RES, CHIP 47K (1005)
R266	1-208-939-81	s	RES, CHIP 150K (1005)
R267	1-208-891-81	s	RES, CHIP 1.5K (1005)

(TR-136 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R268	1-208-911-81	s	RES, CHIP 10K (1005)
R269	1-208-919-81	s	RES, CHIP 22K (1005)
R270	1-208-919-81	s	RES, CHIP 22K (1005)
R271	1-208-935-81	s	RES, CHIP 100K (1005)
R274	1-208-935-81	s	RES, CHIP 100K (1005)
R275	1-208-903-81	s	RES, CHIP 4.7K (1005)
R276	1-208-903-81	s	RES, CHIP 4.7K (1005)
R277	1-208-911-81	s	RES, CHIP 10K (1005)
R278	1-208-927-81	s	RES, CHIP 47K (1005)
R279	1-208-927-81	s	RES, CHIP 47K (1005)
R280	1-208-911-81	s	RES, CHIP 10K (1005)
R281	1-208-911-81	s	RES, CHIP 10K (1005)
R282	1-208-911-81	s	RES, CHIP 10K (1005)
R283	1-208-911-81	s	RES, CHIP 10K (1005)
R284	1-208-919-81	s	RES, CHIP 22K (1005)
R285	1-208-863-81	s	RES, CHIP 100 (1005)
R291	1-208-887-81	s	RES, CHIP 1.0K (1005)
R292	1-208-887-81	s	RES, CHIP 1.0K (1005)
R293	1-208-903-81	s	RES, CHIP 4.7K (1005)
R295	1-208-923-81	s	RES, CHIP 33K (1005)
R296	1-208-891-81	s	RES, CHIP 1.5K (1005)
R297	1-208-923-81	s	RES, CHIP 33K (1005)
R299	1-208-919-81	s	RES, CHIP 22K (1005)
R300	1-208-919-81	s	RES, CHIP 22K (1005)
R301	1-208-935-81	s	RES, CHIP 100K (1005)
R302	1-208-895-81	s	RES, CHIP 2.2K (1005)
R303	1-208-911-81	s	RES, CHIP 10K (1005)
R304	1-208-939-81	s	RES, CHIP 150K (1005)
R305	1-208-923-81	s	RES, CHIP 33K (1005)
R306	1-208-931-81	s	RES, CHIP 68K (1005)
R307	1-208-919-81	s	RES, CHIP 22K (1005)
R308	1-208-919-81	s	RES, CHIP 22K (1005)
R309	1-208-919-81	s	RES, CHIP 22K (1005)
R310	1-208-919-81	s	RES, CHIP 22K (1005)
R311	1-208-903-81	s	RES, CHIP 4.7K (1005)
R312	1-208-907-81	s	RES, CHIP 6.8K (1005)
R313	1-208-863-81	s	RES, CHIP 100 (1005)
R316	1-208-887-81	s	RES, CHIP 1.0K (1005)
R317	1-208-887-81	s	RES, CHIP 1.0K (1005)
R318	1-208-903-81	s	RES, CHIP 4.7K (1005)
R319	1-208-923-81	s	RES, CHIP 33K (1005)
R320	1-208-923-81	s	RES, CHIP 33K (1005)
R322	1-208-891-81	s	RES, CHIP 1.5K (1005)
R323	1-208-923-81	s	RES, CHIP 33K (1005)
R324	1-208-919-81	s	RES, CHIP 22K (1005)
R325	1-208-919-81	s	RES, CHIP 22K (1005)
R326	1-208-935-81	s	RES, CHIP 100K (1005)
R327	1-208-895-81	s	RES, CHIP 2.2K (1005)
R328	1-208-911-81	s	RES, CHIP 10K (1005)
R329	1-208-939-81	s	RES, CHIP 150K (1005)
R330	1-208-923-81	s	RES, CHIP 33K (1005)
R331	1-208-931-81	s	RES, CHIP 68K (1005)
R332	1-208-919-81	s	RES, CHIP 22K (1005)
R333	1-208-919-81	s	RES, CHIP 22K (1005)
R334	1-208-903-81	s	RES, CHIP 4.7K (1005)
R335	1-208-907-81	s	RES, CHIP 6.8K (1005)
R336	1-208-863-81	s	RES, CHIP 100 (1005)
R341	1-208-887-81	s	RES, CHIP 1.0K (1005)
R342	1-208-887-81	s	RES, CHIP 1.0K (1005)

(TR-136 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R343	1-208-899-81	s	RES, CHIP 3.3K (1005)
R345	1-208-923-81	s	RES, CHIP 33K (1005)
R347	1-208-891-81	s	RES, CHIP 1.5K (1005)
R348	1-208-927-81	s	RES, CHIP 47K (1005)
R349	1-208-919-81	s	RES, CHIP 22K (1005)
R350	1-208-919-81	s	RES, CHIP 22K (1005)
R351	1-208-935-81	s	RES, CHIP 100K (1005)
R352	1-208-895-81	s	RES, CHIP 2.2K (1005)
R353	1-208-911-81	s	RES, CHIP 10K (1005)
R354	1-208-939-81	s	RES, CHIP 150K (1005)
R355	1-208-923-81	s	RES, CHIP 33K (1005)
R356	1-208-931-81	s	RES, CHIP 68K (1005)
R357	1-208-919-81	s	RES, CHIP 22K (1005)
R358	1-208-919-81	s	RES, CHIP 22K (1005)
R359	1-208-903-81	s	RES, CHIP 4.7K (1005)
R360	1-208-907-81	s	RES, CHIP 6.8K (1005)
R361	1-208-863-81	s	RES, CHIP 100 (1005)
R366	1-208-887-81	s	RES, CHIP 1.0K (1005)
R367	1-208-887-81	s	RES, CHIP 1.0K (1005)
R368	1-208-903-81	s	RES, CHIP 4.7K (1005)
R369	1-208-903-81	s	RES, CHIP 4.7K (1005)
R370	1-208-923-81	s	RES, CHIP 33K (1005)
R372	1-208-891-81	s	RES, CHIP 1.5K (1005)
R373	1-208-927-81	s	RES, CHIP 47K (1005)
R374	1-208-919-81	s	RES, CHIP 22K (1005)
R375	1-208-919-81	s	RES, CHIP 22K (1005)
R376	1-208-935-81	s	RES, CHIP 100K (1005)
R377	1-208-895-81	s	RES, CHIP 2.2K (1005)
R378	1-208-911-81	s	RES, CHIP 10K (1005)
R379	1-208-939-81	s	RES, CHIP 150K (1005)
R380	1-208-923-81	s	RES, CHIP 33K (1005)
R381	1-208-931-81	s	RES, CHIP 68K (1005)
R382	1-208-919-81	s	RES, CHIP 22K (1005)
R383	1-208-919-81	s	RES, CHIP 22K (1005)
R384	1-208-903-81	s	RES, CHIP 4.7K (1005)
R385	1-208-907-81	s	RES, CHIP 6.8K (1005)
R386	1-208-863-81	s	RES, CHIP 100 (1005)
R387 *2	1-218-941-11	s	METAL CHIP 100 0.5% 1/16W
R388 *2	1-218-941-11	s	METAL CHIP 100 0.5% 1/16W
R401	1-208-863-81	s	RES, CHIP 100 (1005)
R402	1-208-863-81	s	RES, CHIP 100 (1005)
R403	1-208-863-81	s	RES, CHIP 100 (1005)
R404	1-208-855-81	s	RES, CHIP 47 (1005)
R405	1-208-855-81	s	RES, CHIP 47 (1005)
R406	1-208-855-81	s	RES, CHIP 47 (1005)
R408	1-208-927-81	s	RES, CHIP 47K (1005)
R409	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R410	1-208-935-81	s	RES, CHIP 100K (1005)
R411	1-208-911-81	s	RES, CHIP 10K (1005)
R412	1-208-911-81	s	RES, CHIP 10K (1005)
R413	1-208-863-81	s	RES, CHIP 100 (1005)
R414	1-208-935-81	s	RES, CHIP 100K (1005)
R415	1-208-911-81	s	RES, CHIP 10K (1005)
R416	1-208-911-81	s	RES, CHIP 10K (1005)
R417	1-208-863-81	s	RES, CHIP 100 (1005)
R418	1-208-863-81	s	RES, CHIP 100 (1005)
R419	1-208-919-81	s	RES, CHIP 22K (1005)
R420	1-208-935-81	s	RES, CHIP 100K (1005)
R421	1-208-919-81	s	RES, CHIP 22K (1005)

(TR-136 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R422	1-208-935-81	s	RES, CHIP 100K (1005)
R423	1-208-863-81	s	RES, CHIP 100 (1005)
R424	1-208-935-81	s	RES, CHIP 100K (1005)
R425	1-208-911-81	s	RES, CHIP 10K (1005)
R426	1-208-911-81	s	RES, CHIP 10K (1005)
R429	1-208-935-81	s	RES, CHIP 100K (1005)
R430	1-208-911-81	s	RES, CHIP 10K (1005)
R432	1-208-911-81	s	RES, CHIP 10K (1005)
R434	1-208-915-81	s	RES, CHIP 15K (1005)
R435	1-208-915-81	s	RES, CHIP 15K (1005)
R436	1-208-887-81	s	RES, CHIP 1.0K (1005)
R437	1-208-919-81	s	RES, CHIP 22K (1005)
R441	1-208-863-81	s	RES, CHIP 100 (1005)
R442	1-208-855-81	s	RES, CHIP 47 (1005)
R443	1-208-855-81	s	RES, CHIP 47 (1005)
R444	1-208-855-81	s	RES, CHIP 47 (1005)
R445	1-208-927-81	s	RES, CHIP 47K (1005)
R446	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R447	1-208-935-81	s	RES, CHIP 100K (1005)
R448	1-208-911-81	s	RES, CHIP 10K (1005)
R449	1-208-911-81	s	RES, CHIP 10K (1005)
R450	1-208-863-81	s	RES, CHIP 100 (1005)
R451	1-208-935-81	s	RES, CHIP 100K (1005)
R452	1-208-911-81	s	RES, CHIP 10K (1005)
R453	1-208-911-81	s	RES, CHIP 10K (1005)
R454	1-208-863-81	s	RES, CHIP 100 (1005)
R461	1-208-863-81	s	RES, CHIP 100 (1005)
R462	1-208-863-81	s	RES, CHIP 100 (1005)
R463	1-208-855-81	s	RES, CHIP 47 (1005)
R464	1-208-855-81	s	RES, CHIP 47 (1005)
R465	1-208-855-81	s	RES, CHIP 47 (1005)
R467	1-208-927-81	s	RES, CHIP 47K (1005)
R468	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R469	1-208-863-81	s	RES, CHIP 100 (1005)
R470	1-208-911-81	s	RES, CHIP 10K (1005)
R501	1-220-870-81	s	RES, CHIP 10 (1005)
R502	1-208-887-81	s	RES, CHIP 1.0K (1005)
R503	1-208-887-81	s	RES, CHIP 1.0K (1005)
R504	1-208-887-81	s	RES, CHIP 1.0K (1005)
R505	1-208-863-81	s	RES, CHIP 100 (1005)
R508	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R509	1-208-887-81	s	RES, CHIP 1.0K (1005)
R510	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R511	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R512	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R513	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R514	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R515	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R516	1-208-887-81	s	RES, CHIP 1.0K (1005)
R517	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R518	1-208-887-81	s	RES, CHIP 1.0K (1005)
R519	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R520	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R521	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R522	1-208-887-81	s	RES, CHIP 1.0K (1005)
R523	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R524	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R531	1-208-863-81	s	RES, CHIP 100 (1005)
R532	1-220-878-81	s	RES, CHIP 22 (1005)

(TR-136 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R533	1-220-878-81	s	RES, CHIP 22 (1005)
R534	1-220-878-81	s	RES, CHIP 22 (1005)
R535	1-220-878-81	s	RES, CHIP 22 (1005)
R536	1-220-878-81	s	RES, CHIP 22 (1005)
R537	1-208-911-81	s	RES, CHIP 10K (1005)
R538	1-208-911-81	s	RES, CHIP 10K (1005)
R541	1-220-878-81	s	RES, CHIP 22 (1005)
R542	1-220-878-81	s	RES, CHIP 22 (1005)
R543	1-208-895-81	s	RES, CHIP 2.2K (1005)
R544	1-220-878-81	s	RES, CHIP 22 (1005)
R545	1-220-878-81	s	RES, CHIP 22 (1005)
R546	1-208-895-81	s	RES, CHIP 2.2K (1005)
R547	1-208-863-81	s	RES, CHIP 100 (1005)
R548	1-208-863-81	s	RES, CHIP 100 (1005)
R549	1-208-863-81	s	RES, CHIP 100 (1005)
R550	1-208-863-81	s	RES, CHIP 100 (1005)
R551	1-208-895-81	s	RES, CHIP 2.2K (1005)
R552	1-208-895-81	s	RES, CHIP 2.2K (1005)
R553	1-220-870-81	s	RES, CHIP 10 (1005)
R554	1-220-870-81	s	RES, CHIP 10 (1005)
R555	1-208-895-81	s	RES, CHIP 2.2K (1005)
R556	1-208-895-81	s	RES, CHIP 2.2K (1005)
R558	1-220-870-81	s	RES, CHIP 10 (1005)
R559	1-220-870-81	s	RES, CHIP 10 (1005)
R560	1-208-895-81	s	RES, CHIP 2.2K (1005)
R561	1-208-895-81	s	RES, CHIP 2.2K (1005)
R562	1-208-911-81	s	RES, CHIP 10K (1005)
R564	1-208-887-81	s	RES, CHIP 1.0K (1005)
R565	1-208-911-81	s	RES, CHIP 10K (1005)
R566	1-208-887-81	s	RES, CHIP 1.0K (1005)
R567	1-208-927-81	s	RES, CHIP 47K (1005)
R568	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R569	1-208-927-81	s	RES, CHIP 47K (1005)
R570	1-208-927-81	s	RES, CHIP 47K (1005)
R571	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R572	1-208-927-81	s	RES, CHIP 47K (1005)
R573	1-208-887-81	s	RES, CHIP 1.0K (1005)
R574	1-208-887-81	s	RES, CHIP 1.0K (1005)
R575	1-208-887-81	s	RES, CHIP 1.0K (1005)
R576	1-208-887-81	s	RES, CHIP 1.0K (1005)
R577	1-208-911-81	s	RES, CHIP 10K (1005)
R578	1-208-911-81	s	RES, CHIP 10K (1005)
R579	1-208-927-81	s	RES, CHIP 47K (1005)
R580	1-208-927-81	s	RES, CHIP 47K (1005)
R581	1-208-895-81	s	RES, CHIP 2.2K (1005)
R582	1-208-863-81	s	RES, CHIP 100 (1005)
R583	1-208-911-81	s	RES, CHIP 10K (1005)
R584	1-208-895-81	s	RES, CHIP 2.2K (1005)
R585	1-208-863-81	s	RES, CHIP 100 (1005)
R586	1-208-911-81	s	RES, CHIP 10K (1005)
R587	1-208-911-81	s	RES, CHIP 10K (1005)
R588	1-208-911-81	s	RES, CHIP 10K (1005)
R589	1-208-863-81	s	RES, CHIP 100 (1005)
R590	1-208-863-81	s	RES, CHIP 100 (1005)
R591	1-208-911-81	s	RES, CHIP 10K (1005)
R592	1-208-911-81	s	RES, CHIP 10K (1005)
R593	1-220-870-81	s	RES, CHIP 10 (1005)
R601	1-208-863-81	s	RES, CHIP 100 (1005)
R602	1-208-863-81	s	RES, CHIP 100 (1005)

(TR-136 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R603	1-220-870-81	s	RES, CHIP 10 (1005)
R604	1-208-895-81	s	RES, CHIP 2.2K (1005)
R605	1-208-863-81	s	RES, CHIP 100 (1005)
R606	1-220-870-81	s	RES, CHIP 10 (1005)
R607	1-220-870-81	s	RES, CHIP 10 (1005)
R609	1-208-895-81	s	RES, CHIP 2.2K (1005)
R610	1-220-878-81	s	RES, CHIP 22 (1005)
R611	1-220-878-81	s	RES, CHIP 22 (1005)
R612	1-208-895-81	s	RES, CHIP 2.2K (1005)
R613	1-208-895-81	s	RES, CHIP 2.2K (1005)
R614	1-208-867-81	s	RES, CHIP 150 (1005)
R615	1-208-887-81	s	RES, CHIP 1.0K (1005)
R616	1-208-875-81	s	RES, CHIP 330 (1005)
R617	1-208-895-81	s	RES, CHIP 2.2K (1005)
R618	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R619	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R620	1-208-887-81	s	RES, CHIP 1.0K (1005)
R621	1-208-887-81	s	RES, CHIP 1.0K (1005)
R624	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R626	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R628	1-208-887-81	s	RES, CHIP 1.0K (1005)
R629	1-208-887-81	s	RES, CHIP 1.0K (1005)
R630	1-208-879-81	s	RES, CHIP 470 (1005)
R631	1-208-879-81	s	RES, CHIP 470 (1005)
R632	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R633	1-208-867-81	s	RES, CHIP 150 (1005)
R634	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R635	1-208-875-81	s	RES, CHIP 330 (1005)
R636	1-208-867-81	s	RES, CHIP 150 (1005)
R637	1-208-867-81	s	RES, CHIP 150 (1005)
R638	1-208-875-81	s	RES, CHIP 330 (1005)
R639	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R640	1-208-867-81	s	RES, CHIP 150 (1005)
R641	1-208-887-81	s	RES, CHIP 1.0K (1005)
R642	1-208-887-81	s	RES, CHIP 1.0K (1005)
R643	1-208-879-81	s	RES, CHIP 470 (1005)
R644	1-208-883-81	s	RES, CHIP 680 (1005)
R645	1-208-895-81	s	RES, CHIP 2.2K (1005)
R646	1-208-887-81	s	RES, CHIP 1.0K (1005)
R647	1-208-931-81	s	RES, CHIP 68K (1005)
R648	1-208-915-81	s	RES, CHIP 15K (1005)
R649	1-208-931-81	s	RES, CHIP 68K (1005)
R650	1-208-915-81	s	RES, CHIP 15K (1005)
R651	1-208-887-81	s	RES, CHIP 1.0K (1005)
R652	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R653	1-208-863-81	s	RES, CHIP 100 (1005)
R654	1-208-863-81	s	RES, CHIP 100 (1005)
R655	1-208-867-81	s	RES, CHIP 150 (1005)
R656	1-208-867-81	s	RES, CHIP 150 (1005)
R657	1-208-867-81	s	RES, CHIP 150 (1005)
R658	1-208-867-81	s	RES, CHIP 150 (1005)
R659	1-208-867-81	s	RES, CHIP 150 (1005)
R660	1-208-887-81	s	RES, CHIP 1.0K (1005)
R661	1-208-887-81	s	RES, CHIP 1.0K (1005)
R662	1-208-895-81	s	RES, CHIP 2.2K (1005)
R663	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R664	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R701	1-220-878-81	s	RES, CHIP 22 (1005)
R702	1-220-878-81	s	RES, CHIP 22 (1005)

(TR-136 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R703	1-208-887-81	s	RES, CHIP 1.0K (1005)
R704	1-220-878-81	s	RES, CHIP 22 (1005)
R705	1-220-878-81	s	RES, CHIP 22 (1005)
R706	1-220-870-81	s	RES, CHIP 10 (1005)
R707	1-220-870-81	s	RES, CHIP 10 (1005)
R709	1-208-895-81	s	RES, CHIP 2.2K (1005)
R711	1-220-878-81	s	RES, CHIP 22 (1005)
R712	1-208-955-81	s	RES, CHIP 680K (1005)
R713	1-208-911-81	s	RES, CHIP 10K (1005)
R714	1-208-899-81	s	RES, CHIP 3.3K (1005)
R715	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R716	1-208-863-81	s	RES, CHIP 100 (1005)
R721	1-208-863-81	s	RES, CHIP 100 (1005)
R722	1-208-863-81	s	RES, CHIP 100 (1005)
R723	1-208-903-81	s	RES, CHIP 4.7K (1005)
R724	1-208-903-81	s	RES, CHIP 4.7K (1005)
R725	1-208-911-81	s	RES, CHIP 10K (1005)
R726	1-208-911-81	s	RES, CHIP 10K (1005)
R727	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R728	1-208-927-81	s	RES, CHIP 47K (1005)
R729	1-208-927-81	s	RES, CHIP 47K (1005)
R730	1-208-887-81	s	RES, CHIP 1.0K (1005)
R731	1-208-903-81	s	RES, CHIP 4.7K (1005)
R732	1-208-911-81	s	RES, CHIP 10K (1005)
R733	1-208-903-81	s	RES, CHIP 4.7K (1005)
R734	1-208-935-81	s	RES, CHIP 100K (1005)
R735	1-244-161-81	s	RES, CHIP 2.2 (1005)
R736	1-208-911-81	s	RES, CHIP 10K (1005)
R737	1-208-903-81	s	RES, CHIP 4.7K (1005)
R738	1-208-935-81	s	RES, CHIP 100K (1005)
R739	1-244-161-81	s	RES, CHIP 2.2 (1005)
R740	1-208-903-81	s	RES, CHIP 4.7K (1005)
R741	1-208-919-81	s	RES, CHIP 22K (1005)
R742	1-208-903-81	s	RES, CHIP 4.7K (1005)
R743	1-208-919-81	s	RES, CHIP 22K (1005)
R744	1-208-863-81	s	RES, CHIP 100 (1005)
R745	1-208-863-81	s	RES, CHIP 100 (1005)
R746	1-208-863-81	s	RES, CHIP 100 (1005)
R747	1-208-863-81	s	RES, CHIP 100 (1005)
R748	1-208-927-81	s	RES, CHIP 47K (1005)
R749	1-208-895-81	s	RES, CHIP 2.2K (1005)
R750	1-208-863-81	s	RES, CHIP 100 (1005)
R751	1-208-887-81	s	RES, CHIP 1.0K (1005)
R752	1-208-887-81	s	RES, CHIP 1.0K (1005)
R753	1-220-870-81	s	RES, CHIP 10 (1005)
R754	1-220-870-81	s	RES, CHIP 10 (1005)
R755	1-220-870-81	s	RES, CHIP 10 (1005)
R761	1-208-911-81	s	RES, CHIP 10K (1005)
R762	1-208-911-81	s	RES, CHIP 10K (1005)
R763	1-208-919-81	s	RES, CHIP 22K (1005)
R764	1-208-899-81	s	RES, CHIP 3.3K (1005)
R765	1-208-911-81	s	RES, CHIP 10K (1005)
R766	1-208-919-81	s	RES, CHIP 22K (1005)
R767	1-208-915-81	s	RES, CHIP 15K (1005)
R768	1-208-919-81	s	RES, CHIP 22K (1005)
R769	1-208-935-81	s	RES, CHIP 100K (1005)
R770	1-208-911-81	s	RES, CHIP 10K (1005)
R771	1-208-863-81	s	RES, CHIP 100 (1005)
R772	1-208-911-81	s	RES, CHIP 10K (1005)

(TR-136 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R773	1-208-911-81	s	RES, CHIP 10K (1005)
R774	1-208-863-81	s	RES, CHIP 100 (1005)
R775	1-208-903-81	s	RES, CHIP 4.7K (1005)
R776	1-208-895-81	s	RES, CHIP 2.2K (1005)
R777	1-208-895-81	s	RES, CHIP 2.2K (1005)
R778	1-208-903-81	s	RES, CHIP 4.7K (1005)
R779	1-208-879-81	s	RES, CHIP 470 (1005)
R780	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R781	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R782	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R802	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R804	1-208-887-81	s	RES, CHIP 1.0K (1005)
R805	1-208-899-81	s	RES, CHIP 3.3K (1005)
R806	1-208-891-81	s	RES, CHIP 1.5K (1005)
R809	1-208-899-81	s	RES, CHIP 3.3K (1005)
R810	1-208-891-81	s	RES, CHIP 1.5K (1005)
R811	1-208-875-81	s	RES, CHIP 330 (1005)
R814	1-208-891-81	s	RES, CHIP 1.5K (1005)
R816	1-208-903-81	s	RES, CHIP 4.7K (1005)
R817	1-208-911-81	s	RES, CHIP 10K (1005)
R819	1-208-891-81	s	RES, CHIP 1.5K (1005)
R820	1-208-903-81	s	RES, CHIP 4.7K (1005)
R821	1-208-911-81	s	RES, CHIP 10K (1005)
R822	1-208-911-81	s	RES, CHIP 10K (1005)
R824	1-208-887-81	s	RES, CHIP 1.0K (1005)
R825	1-220-878-81	s	RES, CHIP 22 (1005)
R826	1-220-878-81	s	RES, CHIP 22 (1005)
R827	1-208-863-81	s	RES, CHIP 100 (1005)
R828	1-208-863-81	s	RES, CHIP 100 (1005)
R829	1-208-863-81	s	RES, CHIP 100 (1005)
R830	1-208-863-81	s	RES, CHIP 100 (1005)
R831	1-208-895-81	s	RES, CHIP 2.2K (1005)
R832	1-220-878-81	s	RES, CHIP 22 (1005)
R833	1-208-903-81	s	RES, CHIP 4.7K (1005)
R834	1-208-911-81	s	RES, CHIP 10K (1005)
R835	1-208-887-81	s	RES, CHIP 1.0K (1005)
R836	1-208-887-81	s	RES, CHIP 1.0K (1005)
R837	1-208-911-81	s	RES, CHIP 10K (1005)
R838	1-208-915-81	s	RES, CHIP 15K (1005)
R839	1-208-911-81	s	RES, CHIP 10K (1005)
R840	1-208-915-81	s	RES, CHIP 15K (1005)
R841	1-208-887-81	s	RES, CHIP 1.0K (1005)
R842	1-208-863-81	s	RES, CHIP 100 (1005)
R851	1-220-878-81	s	RES, CHIP 22 (1005)
R852	1-220-878-81	s	RES, CHIP 22 (1005)
R853	1-208-895-81	s	RES, CHIP 2.2K (1005)
RB531	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB532	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB533	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB534	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB535	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB536	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB537	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB538	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB601	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB602	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB603	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB604	1-234-378-21	s	RES, NETWORK 10K (1005X4)

(TR-136 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB605	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB606	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB607	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB608	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB609	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB610	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB611	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB612	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB613	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB614	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB615	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB616	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB617	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB618	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB619	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB620	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB621	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB622	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB623	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB624	1-234-376-21	s	RES, NETWORK 2.2K (1005X4)
RB625	1-234-376-21	s	RES, NETWORK 2.2K (1005X4)
RB626	1-234-376-21	s	RES, NETWORK 2.2K (1005X4)
RB701	1-234-374-21	s	RES, NETWORK 470 (1005X4)
RB702	1-234-374-21	s	RES, NETWORK 470 (1005X4)
RB703	1-234-374-21	s	RES, NETWORK 470 (1005X4)
RB704	1-234-374-21	s	RES, NETWORK 470 (1005X4)
RB851	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB852	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB853	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB854	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB855	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB856	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB857	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB858	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB859	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB860	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB861	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB862	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB863	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB864	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB865	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB866	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB867	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB868	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RV102	1-225-791-21	s	RES, ADJ, CERMET 5K
RV103	1-225-791-21	s	RES, ADJ, CERMET 5K
RV104	1-225-791-21	s	RES, ADJ, CERMET 5K
RV105	1-225-791-21	s	RES, ADJ, CERMET 5K
RV201	1-225-793-21	s	RES, ADJ, CERMET 20K
RV202	1-225-793-21	s	RES, ADJ, CERMET 20K
RV203	1-225-793-21	s	RES, ADJ, CERMET 20K
RV204	1-225-793-21	s	RES, ADJ, CERMET 20K
RV601	1-225-791-21	s	RES, ADJ, CERMET 5K
RV602	1-225-791-21	s	RES, ADJ, CERMET 5K
RV721	1-225-793-21	s	RES, ADJ, CERMET 20K
RV761	1-225-789-21	s	RES, ADJ, CERMET 2K
RV801	1-225-789-21	s	RES, ADJ, CERMET 2K
S1	1-692-271-41	s	SWITCH, SLIDE

(TR-136 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
THP1	⚠ 1-804-616-21	s	THERMISTOR, POSITIVE
THP2	⚠ 1-804-616-21	s	THERMISTOR, POSITIVE
THP11	⚠ 1-804-616-21	s	THERMISTOR, POSITIVE
THP31	⚠ 1-804-616-21	s	THERMISTOR, POSITIVE
THP41	⚠ 1-771-845-21	s	THERMISTOR, POSITIVE
TP101	1-535-877-22	s	CHIP, CHECKER
TP102	1-535-877-22	s	CHIP, CHECKER
TP103	1-535-877-22	s	CHIP, CHECKER
TP104	1-535-877-22	s	CHIP, CHECKER
TP105	1-535-877-22	s	CHIP, CHECKER
TP106	1-535-877-22	s	CHIP, CHECKER
TP201	1-535-877-22	s	CHIP, CHECKER
TP202	1-535-877-22	s	CHIP, CHECKER
TP203	1-535-877-22	s	CHIP, CHECKER
TP204	1-535-877-22	s	CHIP, CHECKER
TP205	1-535-877-22	s	CHIP, CHECKER
TP206	1-535-877-22	s	CHIP, CHECKER
TP207	1-535-877-22	s	CHIP, CHECKER
TP208	1-535-877-22	s	CHIP, CHECKER
TP209	1-535-877-22	s	CHIP, CHECKER
TP210	1-535-877-22	s	CHIP, CHECKER
TP401	1-535-877-22	s	CHIP, CHECKER
TP601	1-535-877-22	s	CHIP, CHECKER
TP602	1-535-877-22	s	CHIP, CHECKER
TP603	1-535-877-22	s	CHIP, CHECKER
TP604	1-535-877-22	s	CHIP, CHECKER
TP605	1-535-877-22	s	CHIP, CHECKER
TP721	1-535-877-22	s	CHIP, CHECKER
TP801	1-535-877-22	s	CHIP, CHECKER
X101	1-781-696-21	s	VIBRATOR, CRYSTAL (32.768 KHz)
X541	1-813-677-11	s	OSCILLATOR, CRYSTAL (VCXO)
X542	1-813-676-11	s	OSCILLATOR, CRYSTAL (VCXO)
X543	1-813-675-11	s	OSCILLATOR, CRYSTAL (VCXO)
X544	1-813-674-11	s	OSCILLATOR, CRYSTAL (VCXO)
X721	1-795-671-12	s	OSCILLATOR, CRYSTAL
X722	1-795-670-12	s	OSCILLATOR, CRYSTAL

VDA-63 BOARD
---

*1: [Board No. suffix 12]
*2: [Board No. suffix 13-]

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1101-923-A	s	MOUNTED CIRCUIT BOARD, VDA-63
3pcs	3-729-061-01	s	SCREW (M2X4.5) (TYPE 1)(STEEL)
2pcs	4-654-273-02	s	ACE (M2), LOCK
C1	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3216
C2	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3216
C3	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C4	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C5	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C6	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C7	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C8	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C9	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3216
C12	1-119-923-11	s	CAPACITOR,CHIP CERAMIC 0.047MF
C14	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C15	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C16	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C17	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C19	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C20	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C22	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C23	1-119-923-11	s	CAPACITOR,CHIP CERAMIC 0.047MF
C24	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C25	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C26	1-107-819-11	s	CAP,CERAMIC 22000PF/16V(1005)
C27	1-164-936-11	s	CAPACITOR,CHIP CERAMIC 680PF
C28	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C29	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C30	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C31	1-131-661-11	s	CAPACITOR,ELECT 100MF/10V CHIP
C32	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C33	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C34	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C35	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C36	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3216
C37	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C38	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C39	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C40	1-164-850-11	s	CAPACITOR,CHIP CERAMIC 10PF/50
C41	1-164-850-11	s	CAPACITOR,CHIP CERAMIC 10PF/50
C100	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C103	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C104	1-164-840-11	s	CAPACITOR,CHIP CERAMIC 1.5PF
C105	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C106	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C107	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C108	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C109	1-164-845-11	s	CAPACITOR,CERAMIC 5PF/16V(1005
C110	1-164-840-11	s	CAPACITOR,CHIP CERAMIC 1.5PF
C111	1-164-845-11	s	CAPACITOR,CERAMIC 5PF/16V(1005
C113	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C114	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C115	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C116	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C117	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C118	1-164-840-11	s	CAPACITOR,CHIP CERAMIC 1.5PF
C119	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V

(VDA-63 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C120	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C121	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C122	1-165-884-91	s	CAPACITOR, CERAMIC 2.2MF(1608)
C123	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C124	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C125	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C126	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C127	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C128	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C129	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C130	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C131	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C132	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C133	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C134	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C135	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C136	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C137	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C138	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C139	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C140	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C141	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C142	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C143	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C144	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C145	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C146	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C147	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C148	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C149	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C150	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C151	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C152	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C153	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C154	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C155	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C156	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C157	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C158	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C159	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C160	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C161	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C162	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C163	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C164	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C165	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C166	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C167	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C168	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C169	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C170	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C171	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C172	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C173	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C174	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C175	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C176	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C177	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C178	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V

(VDA-63 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C179	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C180	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C181	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C182	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C183	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C184	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C185	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C186	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C187	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C188	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C189	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C300	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C301	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C302	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C303	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C304	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C305	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C306	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C307	1-164-862-11	s	CAPACITOR,CHIP CERAMIC 33PF/50
C308	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C309	1-164-860-11	s	CAPACITOR,CHIP CERAMIC 27PF/50
C310	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C311	1-164-862-11	s	CAPACITOR,CHIP CERAMIC 33PF/50
C312	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C313	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C314	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C316	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C317	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C318	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C319	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C320	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C321	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C322	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C323	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C324	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C325	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C326	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C327	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C328	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C329	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C330	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C331	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C332	1-164-860-11	s	CAPACITOR,CHIP CERAMIC 27PF/50
C333	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C334	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C335	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C336	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C337	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C338	1-164-850-11	s	CAPACITOR,CHIP CERAMIC 10PF/50
C339	1-164-858-11	s	CAPACITOR,CERAMIC 22PF/50V
C340	1-164-866-11	s	CAPACITOR,CHIP CERAMIC 47PF/50
C341	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C342	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C343	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C344	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C345	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C346	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C347	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C348	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)

(VDA-63 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C349	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C350	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C351	1-164-840-11	s	CAPACITOR,CHIP CERAMIC 1.5PF
C352	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C353	1-164-840-11	s	CAPACITOR,CHIP CERAMIC 1.5PF
C354	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C355	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C356	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C357	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C358	1-164-845-11	s	CAPACITOR,CERAMIC 5PF/16V(1005
C359	1-164-840-11	s	CAPACITOR,CHIP CERAMIC 1.5PF
C360	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C361	1-164-845-11	s	CAPACITOR,CERAMIC 5PF/16V(1005
C362	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C363	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C364	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C365	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C367	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C368	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C369	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C370	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C371	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C372	1-164-840-11	s	CAPACITOR,CHIP CERAMIC 1.5PF
C373	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C374	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C375	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C376	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C377	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C378	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C379	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C380	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C381	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C382	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C383	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C384	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C385	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C386	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C387	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C388	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C391	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C392	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C393	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C394	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C395	1-164-840-11	s	CAPACITOR,CHIP CERAMIC 1.5PF
C396	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C397	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C398	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C399	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C400	1-164-840-11	s	CAPACITOR,CHIP CERAMIC 1.5PF
C401	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C402	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C403	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C404	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C405	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C406	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C407	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C408	1-164-840-11	s	CAPACITOR,CHIP CERAMIC 1.5PF
C409	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C410	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)

(VDA-63 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C411	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C412	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C413	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C414	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C415	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C416	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C417	1-164-840-11	s	CAPACITOR,CHIP CERAMIC 1.5PF
C418	1-164-840-11	s	CAPACITOR,CHIP CERAMIC 1.5PF
C419	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C420	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C421	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C422	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C423	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C424	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C425	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C426	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C427	1-164-840-11	s	CAPACITOR,CHIP CERAMIC 1.5PF
C428	1-164-840-11	s	CAPACITOR,CHIP CERAMIC 1.5PF
CN100	1-764-093-21	o	PIN, CONNECTOR (PC BOARD) 8P
D1	8-719-017-03	s	DIODE 02DZ4.7-TPH3
D2	8-719-017-03	s	DIODE 02DZ4.7-TPH3
D3	8-719-017-03	s	DIODE 02DZ4.7-TPH3
E1	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
FB1	1-469-094-21	s	FERRITE, EMI (SMD)
FB2	1-469-094-21	s	FERRITE, EMI (SMD)
FB100	1-469-094-21	s	FERRITE, EMI (SMD)
FB101	1-469-094-21	s	FERRITE, EMI (SMD)
FB102	1-469-094-21	s	FERRITE, EMI (SMD)
FL100	1-813-544-11	s	FILTER, LOW PASS
FL101	1-813-543-11	s	FILTER, LOW PASS
FL102	1-813-543-11	s	FILTER, LOW PASS
FL300	1-233-891-21	s	FILTER, LOW PASS
IC1	6-701-572-01	s	IC TPS54610PWPR
IC2	6-704-976-01	s	IC ADR381ART-REEL7
IC3	8-759-327-01	s	IC NJM062V-TE2
IC4	8-759-327-01	s	IC NJM062V-TE2
IC100	8-759-490-42	s	IC TC74VHCT574AFT(EL)
IC102	8-759-561-46	s	IC AD8014ART-REEL7
IC103	8-759-685-33	s	IC BU2500FV-E2
IC104	8-759-561-46	s	IC AD8014ART-REEL7
IC105	8-759-363-26	s	IC RN5VD28AA-TL
IC106	8-759-662-39	s	IC 74VHCT245AMTCX
IC107	8-759-662-39	s	IC 74VHCT245AMTCX
IC108	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC109	6-700-387-01	s	IC EPC2LC20-TP
IC111	8-752-391-99	s	IC CXD2315Q-T4
IC112	8-752-391-99	s	IC CXD2315Q-T4
IC113	8-752-391-99	s	IC CXD2315Q-T4
IC114	6-706-863-01	s	IC LMH6732MFX/NOPB
IC115	6-706-863-01	s	IC LMH6732MFX/NOPB
IC116	6-706-863-01	s	IC LMH6732MFX/NOPB
IC300	8-759-675-47	s	IC SN74LVC04APWR
IC301	8-759-561-46	s	IC AD8014ART-REEL7
IC302	8-759-184-64	s	IC TC4W66FU
IC303	8-759-344-12	s	IC GS4981CTAE3
IC304	8-759-980-44	s	IC TL712CPS
IC305	8-759-980-44	s	IC TL712CPS

(VDA-63 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC306	8-759-561-46	s	IC AD8014ART-REEL7
IC307	6-706-484-01	s	IC TC7SH04FU(T5RSOYJF)
IC308	8-759-549-01	s	IC SN74LV125APWR
IC309	8-759-490-42	s	IC TC74VHCT574AFT(EL)
IC310	6-706-863-01	s	IC LMH6732MFX/NOPB
IC311	8-759-561-46	s	IC AD8014ART-REEL7
IC312	6-706-471-01	s	IC THS5661AIPWR
IC313	6-706-484-01	s	IC TC7SH04FU(T5RSOYJF)
IC314	8-759-561-46	s	IC AD8014ART-REEL7
IC315	8-759-561-46	s	IC AD8014ART-REEL7
IC316	8-759-561-46	s	IC AD8014ART-REEL7
IC317	8-759-564-49	s	IC TC7W53FU-TE12R
IC318	6-706-863-01	s	IC LMH6732MFX/NOPB
IC319	6-706-863-01	s	IC LMH6732MFX/NOPB
IC320	6-706-863-01	s	IC LMH6732MFX/NOPB
IC321	6-706-863-01	s	IC LMH6732MFX/NOPB
IC322	6-706-863-01	s	IC LMH6732MFX/NOPB
IC323	6-706-863-01	s	IC LMH6732MFX/NOPB
IC324	8-759-663-35	s	IC 74VHC4053MTCX
IC325	8-759-669-66	s	IC TLC272CPWR
IC326	8-759-669-66	s	IC TLC272CPWR
IC327	6-706-863-01	s	IC LMH6732MFX/NOPB
L1	1-414-398-11	s	INDUCTOR (SMD) 10UH
L2	1-416-344-11	s	COIL, CHOKE 10UH
L3	1-416-344-11	s	COIL, CHOKE 10UH
L4	1-414-398-11	s	INDUCTOR (SMD) 10UH
L5	1-414-398-11	s	INDUCTOR (SMD) 10UH
L6	1-414-398-11	s	INDUCTOR (SMD) 10UH
L101	1-414-398-11	s	INDUCTOR (SMD) 10UH
L102	1-412-947-11	s	INDUCTOR 4.7UH (2520)
L103	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L104	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L105	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L106	1-414-398-11	s	INDUCTOR (SMD) 10UH
L107	1-414-398-11	s	INDUCTOR (SMD) 10UH
L108	1-414-398-11	s	INDUCTOR (SMD) 10UH
L109	1-414-398-11	s	INDUCTOR (SMD) 10UH
L110	1-414-398-11	s	INDUCTOR (SMD) 10UH
L111	1-414-398-11	s	INDUCTOR (SMD) 10UH
L112	1-414-398-11	s	INDUCTOR (SMD) 10UH
L113	1-414-398-11	s	INDUCTOR (SMD) 10UH
L114	1-414-398-11	s	INDUCTOR (SMD) 10UH
L115	1-414-398-11	s	INDUCTOR (SMD) 10UH
L116	1-414-398-11	s	INDUCTOR (SMD) 10UH
L117	1-414-398-11	s	INDUCTOR (SMD) 10UH
L300	1-414-398-11	s	INDUCTOR (SMD) 10UH
L301	1-414-398-11	s	INDUCTOR (SMD) 10UH
L302	1-414-398-11	s	INDUCTOR (SMD) 10UH
L303	1-414-398-11	s	INDUCTOR (SMD) 10UH
L304	1-414-398-11	s	INDUCTOR (SMD) 10UH
L305	1-412-947-11	s	INDUCTOR 4.7UH (2520)
L306	1-414-398-11	s	INDUCTOR (SMD) 10UH
L307	1-414-398-11	s	INDUCTOR (SMD) 10UH
L308	1-414-398-11	s	INDUCTOR (SMD) 10UH
L309	1-412-955-11	s	INDUCTOR 22UH (2520)
L310	1-414-398-11	s	INDUCTOR (SMD) 10UH
L311	1-414-398-11	s	INDUCTOR (SMD) 10UH
L312	1-414-398-11	s	INDUCTOR (SMD) 10UH

(VDA-63 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
L313	1-414-398-11	s	INDUCTOR (SMD) 10UH
L314	1-414-398-11	s	INDUCTOR (SMD) 10UH
L315	1-412-947-11	s	INDUCTOR 4.7UH (2520)
L316	1-414-398-11	s	INDUCTOR (SMD) 10UH
L317	1-414-398-11	s	INDUCTOR (SMD) 10UH
L318	1-414-398-11	s	INDUCTOR (SMD) 10UH
L319	1-414-398-11	s	INDUCTOR (SMD) 10UH
L320	1-414-398-11	s	INDUCTOR (SMD) 10UH
L321	1-414-398-11	s	INDUCTOR (SMD) 10UH
L322	1-414-398-11	s	INDUCTOR (SMD) 10UH
L323	1-414-398-11	s	INDUCTOR (SMD) 10UH
L324	1-414-398-11	s	INDUCTOR (SMD) 10UH
L325	1-414-398-11	s	INDUCTOR (SMD) 10UH
L326	1-414-398-11	s	INDUCTOR (SMD) 10UH
L327	1-414-398-11	s	INDUCTOR (SMD) 10UH
L328	1-414-398-11	s	INDUCTOR (SMD) 10UH
L329	1-414-398-11	s	INDUCTOR (SMD) 10UH
L330	1-414-398-11	s	INDUCTOR (SMD) 10UH
L331	1-414-398-11	s	INDUCTOR (SMD) 10UH
L332	1-414-398-11	s	INDUCTOR (SMD) 10UH
L333	1-414-398-11	s	INDUCTOR (SMD) 10UH
L334	1-414-398-11	s	INDUCTOR (SMD) 10UH
L335	1-414-398-11	s	INDUCTOR (SMD) 10UH
L336	1-414-398-11	s	INDUCTOR (SMD) 10UH
L337	1-414-398-11	s	INDUCTOR (SMD) 10UH
L338	1-414-398-11	s	INDUCTOR (SMD) 10UH
L339	1-414-398-11	s	INDUCTOR (SMD) 10UH
Q1	8-729-230-27	s	TRANSISTOR 2SA1213Y-TE12L
Q2	8-729-230-27	s	TRANSISTOR 2SA1213Y-TE12L
Q3	8-729-807-51	s	TRANSISTOR 2SD1623-S
Q300	8-729-928-19	s	TRANSISTOR 2SA1774R
Q301	8-729-927-99	s	TRANSISTOR 2SC4617R
Q302	8-729-927-99	s	TRANSISTOR 2SC4617R
Q303	8-729-927-99	s	TRANSISTOR 2SC4617R
Q304	8-729-143-13	s	TRANSISTOR 2SC4176-B34
Q305	8-729-143-13	s	TRANSISTOR 2SC4176-B34
Q306	8-729-143-13	s	TRANSISTOR 2SC4176-B34
Q307	8-729-143-13	s	TRANSISTOR 2SC4176-B34
Q308	8-729-928-36	s	TRANSISTOR DTA114EE
Q309	8-729-928-36	s	TRANSISTOR DTA114EE
Q310	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q311	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q312	8-729-143-13	s	TRANSISTOR 2SC4176-B34
Q313	8-729-143-13	s	TRANSISTOR 2SC4176-B34
Q314	8-729-143-13	s	TRANSISTOR 2SC4176-B34
Q315	8-729-143-13	s	TRANSISTOR 2SC4176-B34
Q316	8-729-143-13	s	TRANSISTOR 2SC4176-B34
Q317	8-729-143-13	s	TRANSISTOR 2SC4176-B34
Q318	8-729-928-36	s	TRANSISTOR DTA114EE
Q319	8-729-928-36	s	TRANSISTOR DTA114EE
Q320	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q321	8-729-928-36	s	TRANSISTOR DTA114EE
Q322	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q323	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
R1	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R2	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R3	1-208-933-11	s	RESISTOR CHIP 82K
R5	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)

(VDA-63 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R7	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R8	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R9	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R10	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R11	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R12	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005
R13	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R14	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R15	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R16	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005
R17	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R18	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R19	1-208-931-11	s	RESISTOR, CHIP 68K (1005)
R20	1-208-931-11	s	RESISTOR, CHIP 68K (1005)
R21	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R22	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R23	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R24	1-208-697-11	s	RESISTOR CHIP 3.9K 1/16W(1005)
R25	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R26	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R100	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R101	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R102	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R103	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R106	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R107	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R108	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R109	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R110	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R111	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R112	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R113	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R114	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R115	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R116	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R117	1-208-679-11	s	RESISTOR CHIP 680 1/16W (1005)
R118	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R119	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R120	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R121	1-208-679-11	s	RESISTOR CHIP 680 1/16W (1005)
R122	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R123	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R124	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R125	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R126	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R127	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R128	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R129	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R130	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R131	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R132	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R133	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R134	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R135	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R136	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R137	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R138	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R139	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R140	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)

(VDA-63 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R141	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R142	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R143	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R144	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R145	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R146	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R147	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R148	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R149	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R150	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R151	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R152	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R153	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R154	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R155	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R156	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R157	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R158	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R159	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R160	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R161	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R162	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R163	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R164	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R165	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R166	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R167	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R169	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R171	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R172	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R173	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R174	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R175	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R176	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R177	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R178	1-208-679-11	s	RESISTOR CHIP 680 1/16W (1005)
R179	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R180	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R181	1-208-679-11	s	RESISTOR CHIP 680 1/16W (1005)
R182	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R183	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R184	1-208-679-11	s	RESISTOR CHIP 680 1/16W (1005)
R185	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R186	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R187	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R188	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R189	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R190	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R191	1-208-663-11	s	RESISTOR CHIP 150 1/16W (1005)
R192	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R193	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R194	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R195	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R196	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R197	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R198 *1	1-208-695-11	s	METAL CHIP 3.3K 0.5% 1/16W
R199 *1	1-208-695-11	s	METAL CHIP 3.3K 0.5% 1/16W
R200	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R201	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)

(VDA-63 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R202	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R203	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R204 *1	1-208-695-11	s	METAL CHIP 3.3K 0.5% 1/16W
R205	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R206 *1	1-208-695-11	s	METAL CHIP 3.3K 0.5% 1/16W
R207	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R208	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R209	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R210	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R211	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R212	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R213	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R214	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R215	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R216	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R217	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R218	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R219	1-208-939-11	s	RESISTOR, CHIP 150K (1005)
R220	1-208-939-11	s	RESISTOR, CHIP 150K (1005)
R221	1-208-939-11	s	RESISTOR, CHIP 150K (1005)
R222	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R223	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R224	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R225	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R300	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R301	1-208-860-11	s	RESISTOR CHIP 75 1/16W (1005)
R302	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R303	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R304	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R306	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R308	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R309	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R310	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R311	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R312	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R313	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R314	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R315	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R316	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R317	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R318	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R319	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005
R321	1-208-703-11	s	RESISTOR,CHIP 6.8K 1/16W(1005)
R322	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R323	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R324	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R325	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R326	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R327	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R328	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R329	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R330	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R331	1-208-955-11	s	RESISTOR CHIP 680K
R332	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R333	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R334	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R335	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R336	1-208-955-11	s	RESISTOR CHIP 680K
R337	1-208-947-11	s	RESISTOR CHIP 330K 1/16W(1005)

(VDA-63 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R338	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R339	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R340	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R341	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R342	1-208-873-11	s	RESISTOR,CHIP 270 1/16W (1005)
R343	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R344	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R345	1-208-647-11	s	RESISTOR CHIP 33 1/16W (1005)
R346	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R347	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R348	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R349	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R350	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R351	1-208-679-11	s	RESISTOR CHIP 680 1/16W (1005)
R352	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R353	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R354	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R355	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R356	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R357	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R358	1-208-679-11	s	RESISTOR CHIP 680 1/16W (1005)
R359	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R360	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R361	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R362	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R363	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R364	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R365	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R366	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R367	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R368	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R369	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R370	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R372	1-218-948-11	s	RESISTOR CHIP 390 1/16W (1005)
R373	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R374	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R375	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R376	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R377	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R378	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R379	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R380	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R381	1-208-939-11	s	RESISTOR, CHIP 150K (1005)
R382	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R383	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R384	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R385	1-208-679-11	s	RESISTOR CHIP 680 1/16W (1005)
R386	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R387	1-208-955-11	s	RESISTOR CHIP 680K
R388	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R389	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R390	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R391	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R392	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R393	1-208-663-11	s	RESISTOR CHIP 150 1/16W (1005)
R394	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R395	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R396	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R397	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)

(VDA-63 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R398	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R399	1-208-679-11	s	RESISTOR CHIP 680 1/16W (1005)
R400	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R402	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R403	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R404	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R405	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R406	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R407	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R408	1-208-679-11	s	RESISTOR CHIP 680 1/16W (1005)
R409	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R410	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R411	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R412	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R413	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R414	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R415	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R416	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R417	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R418	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R419	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R420	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R421	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R422	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R423	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R424	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R425	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R426	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R427	1-208-679-11	s	RESISTOR CHIP 680 1/16W (1005)
R428	1-208-679-11	s	RESISTOR CHIP 680 1/16W (1005)
R429	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R430	1-208-679-11	s	RESISTOR CHIP 680 1/16W (1005)
R431	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R434	1-208-679-11	s	RESISTOR CHIP 680 1/16W (1005)
R435	1-208-679-11	s	RESISTOR CHIP 680 1/16W (1005)
R436	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R437	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R438	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R440	1-208-663-11	s	RESISTOR CHIP 150 1/16W (1005)
R441	1-208-939-11	s	RESISTOR, CHIP 150K (1005)
R442	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R443	1-208-860-11	s	RESISTOR CHIP 75 1/16W (1005)
R444	1-208-860-11	s	RESISTOR CHIP 75 1/16W (1005)
R445	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R446	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R447	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R448	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R449	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R450	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R451	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R452	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R454	1-208-663-11	s	RESISTOR CHIP 150 1/16W (1005)
R455	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R456	1-208-939-11	s	RESISTOR, CHIP 150K (1005)
R457	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R458	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R459	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R460	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R461	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)

(VDA-63 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R462	1-208-860-11	s	RESISTOR CHIP 75 1/16W (1005)
R463	1-208-860-11	s	RESISTOR CHIP 75 1/16W (1005)
R464	1-208-860-11	s	RESISTOR CHIP 75 1/16W (1005)
R465	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R466	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R467	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R468	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R469	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R470	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R471	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R472	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R473	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R474	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R475	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R476	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R478	1-208-663-11	s	RESISTOR CHIP 150 1/16W (1005)
R479	1-208-939-11	s	RESISTOR, CHIP 150K (1005)
R480	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R481	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R482	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R483	1-208-860-11	s	RESISTOR CHIP 75 1/16W (1005)
R484	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R485	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R486	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R487	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R488	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R489	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R491	1-208-663-11	s	RESISTOR CHIP 150 1/16W (1005)
R493	1-208-663-11	s	RESISTOR CHIP 150 1/16W (1005)
R494	1-208-939-11	s	RESISTOR, CHIP 150K (1005)
R495	1-208-939-11	s	RESISTOR, CHIP 150K (1005)
R496	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R497	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R498	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R499	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R500	1-208-860-11	s	RESISTOR CHIP 75 1/16W (1005)
R501	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R502	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R503	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R504	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R505	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R506	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R508	1-208-663-11	s	RESISTOR CHIP 150 1/16W (1005)
R510	1-208-663-11	s	RESISTOR CHIP 150 1/16W (1005)
R511	1-208-939-11	s	RESISTOR, CHIP 150K (1005)
R512	1-208-939-11	s	RESISTOR, CHIP 150K (1005)
R513	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R514	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R515	1-208-860-11	s	RESISTOR CHIP 75 1/16W (1005)
R516	1-208-860-11	s	RESISTOR CHIP 75 1/16W (1005)
R517	1-208-860-11	s	RESISTOR CHIP 75 1/16W (1005)
R518	1-208-860-11	s	RESISTOR CHIP 75 1/16W (1005)
R519	1-208-860-11	s	RESISTOR CHIP 75 1/16W (1005)
R520	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
RB100	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB102	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB103	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB104	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB105	1-234-372-11	s	RES, NETWORK 100X4 (1005)

(VDA-63 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB106	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB107	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB108	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB109	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB110	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB111	1-234-373-21	s	RES, NETWORK 220X4 (1005)
RB112	1-234-373-21	s	RES, NETWORK 220X4 (1005)
RB113	1-234-373-21	s	RES, NETWORK 220X4 (1005)
RB114	1-234-373-21	s	RES, NETWORK 220X4 (1005)
RB115	1-234-373-21	s	RES, NETWORK 220X4 (1005)
RB116	1-234-373-21	s	RES, NETWORK 220X4 (1005)
RB117	1-234-373-21	s	RES, NETWORK 220X4 (1005)
RB118	1-234-373-21	s	RES, NETWORK 220X4 (1005)
RB119	1-234-373-21	s	RES, NETWORK 220X4 (1005)
RB300	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB301	1-234-373-21	s	RES, NETWORK 220X4 (1005)
RB302	1-234-373-21	s	RES, NETWORK 220X4 (1005)
RB303	1-234-373-21	s	RES, NETWORK 220X4 (1005)
THP1	1-804-458-21	s	THERMISTOR, POSITIVE
THP2	1-804-458-21	s	THERMISTOR, POSITIVE
THP3	1-804-458-21	s	THERMISTOR, POSITIVE
THP4	1-804-458-21	s	THERMISTOR, POSITIVE
TP100	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
TP300	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
TP301	1-535-877-22	s	CHIP,CHECKER (TEST POINT)

1-4. Optional Fixtures

Part No.	SP	Description
A-8326-017-A	s	MOUNTED CIRCUIT BOARD, ROM-28
A-8327-351-A	o	MOUNTED CIRCUIT BOARD, EX-738
A-8344-327-A	s	EXTENSION ASSY,DPR-197
J-6480-010-A	o	ALIGNMENT SLEEVE REMOVER
J-7120-140-A	o	PLD DOWNLOAD FIXTURE

1-5. Supplied Accessories

1-5-1. HDC1000/1100

Ref. No. or Q'ty	Part No.	SP	Description
2pcs	2-280-511-01	o	BRACKET,ADJUSTMENT ANGLE
2pcs	3-185-945-02	s	PLATE, NUMBER (WHITE)
	3-622-537-01	o	PLATE,NUMBER(LLA) (BLACK)
2pcs	3-612-712-01	s	BAND,CLAMP
1pc	3-903-903-02	s	OPERATION MANUAL
1pc	3-992-267-01	s	PLATE, NUMBER
1pc	4-027-937-03	s	PLATE,NUMBER

1-5-2. HDC1500/1550/1580/1600

Ref. No. or Q'ty	Part No.	SP	Description
1pc	3-868-749-04	s	OPERATION MANUAL (for HDC1500/1550/1600)
1pc	3-872-580-01	s	LABEL(HANDLE)
1pc	3-872-608-03	s	LABEL(BNC)
1pc	3-992-285-01	s	OPERATION MANUAL (for HDC1580)

Section 2
Semiconductor Pin Assignments

The following describes the semiconductor types used in this unit.
For semiconductors marked with page numbers in the index, refer to the corresponding pages in this section. However, in some cases incompatible types are also listed, therefore, when a part is to be replaced, also refer to the Spare Parts section.
In addition, for semiconductors with ID Nos., refer to the separate CD-ROM titled “Semiconductor Pin Assignments” (Sony Part No. 9-968-546-xx) that allows searching for parts by semiconductor type or ID No.
The semiconductors in the manual or on the CD-ROM are listed by equivalent types. Thus the external view or the index mark indication may differ from the actual type.
Pin assignments and block diagrams are based on the IC manufacturer’s data book.

本機に使用されている半導体型名の一覧を下記に示します。
索引中，ページが記載されている半導体は，本章の該当ページを参照してください。ただし，互換性のない型名を併記している場合がありますので，部品を交換するときは，Spare Partsの章を参照してください。
また，ID番号が記載されている半導体は，別途発行の “Semiconductor Pin Assignments” CD−ROM版 (ソニー部品番号：9−968−546−xx)を参照してください。
半導体型名またはID番号から検索ができます。
マニュアルまたはCD−ROMに掲載されている半導体は，それぞれの機能を等価的に表わしたものです。
外観やインデックスマークの表示方法が実物と異なる場合があります。
ピン配置およびブロック図はICメーカーのデータブックに従いました。

DIODE — **Page or ID No.**

02DZ4.7-TPH3 ..... DC008-04

1SS184 ..... DC001-03
1SS271 ..... DC001-01
1SS300-TE85L DC001-02
1SS301-TE85L DC001-03
1SS302 ..... DC001-01
1SS302-TE85L DC001-01

DAN222 ..... DC001-03
DAN222-TL DC001-03

EC10QS-06-TE12L DC007-01
EC10QS06 ..... DC007-01

HSM88WA DC001-02
HSM88WK DC001-03
HSM88WK-TL DC001-03

MA3J142E0LSO DC001-03
MA3J14300LSO DC001-01
MA6S121-(TX) DC005-07
MA728 ..... DC008-01
MA728-TX DC008-01

RD13SB-T1 ..... DC008-04
RD2.0SB-T1 ..... DC008-04
RD20SB-T1 ..... DC008-04
RD3.0SB DC008-04
RD5.1SB-T2 ..... DC008-04
RD8.2SB-T1 ..... DC008-04

SC802-04-TE12RA DC008-02

LED — **Page or ID No.**

CL-191YG-CD-T LC004-01
CL-200HR-C-TSL LC008-04

F1J6 ..... LC001-01
F1J6TP LC001-01

MD0708C-RG LR083-04

TRANSISTOR — **Page or ID No.**

2SA1213Y-TE12L TC002-01
2SA1610-T1Y34 ..... TC001-01
2SA1610-Y33 ..... TC001-01
2SA1615-Z-K TC010-02
2SA1774R TC001-01
2SB1115-T1YL TC002-01
2SB1115A TC002-01
2SB624-BV5 ..... TC001-01
2SB624-T1BV5 ..... TC001-01
2SC3324 ..... TC001-02
2SC4176-B34 ..... TC001-02
2SC4176T1B33B34B35 ..... TC001-02
2SC4177 ..... TC001-02
2SC4617R TC001-02
2SD1623-S TC002-02
2SD2098-T100R TC002-02
2SK620 ..... TC001-07
2SK880GR-TE85L TC001-05

DTA114EE TC001-04
DTA123JE-TL TC001-04
DTA144EE TC001-04
DTA144EE-TL TC001-04
DTC114EE TC001-03

Index

TRANSISTOR	Page or ID No.
DTC123JE	TC001-03
DTC123JE-TL	TC001-03
DTC144EE	TC001-03
DTC144EE-TL	TC001-03
FDC6506P	TC005-19
FDC6561AN	TC005-20
NDS355AN	TC001-07
NDS356AP	TC001-20

IC	Page or ID No.
74VHC08MTCX	TC74HC08P
74VHC245MTCX	TC74HC245P
74VHC4053MTCX	MC74HC4053F
74VHCT245AMTCX	TC74HC245P
AD5424YCPZ-REEL7	AD5424YCPZ-REEL7
AD8014ART-REEL7	AD8055ART-REEL7
ADR381ART-REEL7	MAX6066BEUR-T
AK4552VT-E2	AK4552VT-E2
AK5380VT-E2	AK5380VT-E2
AK9813BF-E2	MB88E346PFV-G-BND-ER
BU2500FV-E2	M62352P
CAT24WC08J-TE13	X24C02S-30
CAT24WC256XI-TE13	CAT24WC256XI-TE13
CXD1171M	CXD1171M
CXD2315Q-T4	CXD2306Q
CXD9093R	CXD9093R
CXD9156GG-P	9-999-999-99
EPC2LC20-TP	EPC2LC20
EPC2LC20N-TP	EPC2LC20
HD64F2377VFQ33V	HD64F2377VFQ33V
HD64F7145F50	HD64F7145F50
IS42S32200B-6TL-TR	IS42S32200B-6TL-TR
LM45BIM3X	LM45BIM3X
M51132FP	M51132FP
MB86189PFV-G-BND-ER	MB86189PFV-G-BND-ER
MC100LVEL11DTR2	MC10EL11DR2
MC14053BDTR2	MC74HC4053F
MC74HC4046ADTR2	CD4046BE
MC74HC4052ADTR2	MC74HC4052N
NC7SZ86P5X	TC7S86FU
NJM062V(TE2)	RC4558
NJM062V(TE2)	RC4558
NJM062V-TE2	RC4558
NJM2772V(TE2)	NJM2772V_TE2
NJM2903V(TE2)	UA393DC
NJM2904V(TE2)	RC4558
NJM3414AV(TE2)	RC4558
NJM4558V-TE2	RC4558
NJM4580V(TE2)	RC4558
NJM4580VTE2	RC4558
PCA9555DB-118	PCA9555DB-118
RN5VD28AA-TL	S-80928ANMP-DDR-T2
RTC4574JE-TP	RTC4574JE-TP
S-812C30AUA-C2KT2G	S-81225AG-RH
SN74AHCT04PWR	TC74HC04P
SN74LV125APWR	MC74HC125N
SN74LV541APWR	MC74HC541N
SN74LVC00APWR	TC74HC00P
SN74LVC04APWR	TC74HC04P
SN74LVC138APWR-12	TC74HC138P
SN74LVC157APWR	TC74HC157P
SN74LVC245APWR	TC74HC245P
SN74LVC541APWR	SN74LS541N
SN74LVC574APWR	TC74HC574P
SN74LVC74APWR-12	TC74HC74P
SN75158PS	SN75158P
TC4W66FU(TE12R)	TC4W66F
TC4W66FU	TC4W66F
TC74ACT04F	TC74HC04P
TC74ACT04F-EL	TC74HC04P
TC74HC4051AFT(EL)	MC74HC4051N
TC74HC4052AFT(EL)	MC74HC4052N
TC74VHC14FT(EL)	TC74HC14P
TC74VHC32FT(EL)	TC74HC32P
TC74VHC373FT(EL)	TC74HC373P
TC74VHC595FT(EL)	TC74HC595P
TC74VHCT04AFT(EL)	TC74HC04P
TC74VHCT125AFT(EL)	MC74HC125N
TC74VHCT244AFT(EL)	TC74HC244P
TC74VHCT574AFT(EL)	TC74HC574P
TC7SZ00FU(TE85R)	TC7S00F
TC7SZ04FU(TE85R)	TC7S04F
TC7SZ08FU(TE85R)	TC7S08F
TC7SZ125FU(TE85R)	NC7SZ125P5
TC7W53FU(TE12R)	TC4W53FU
TC7W53FU-TE12R	TC4W53FU
TC7WH00FU(TE12R)	TC7W00F
TC7WH00FU-TE12R	TC7W00F
TC7WH04FK(TE85R)	TC7W04F
TC7WH04FU(TE12R)	TC7W04F
TC7WH08FK(TE85R)	TC7W08F
TC7WH125FU(TE12R)	TC7W125FU
TC7WH14FK(TE85R)	TC7W14FU
TC7WH157FU(TE12R)	TC7WH157FU_TE12R
TC7WH32FK-TE85R	TC7W32FU
TC7WH32FU(TE12R)	TC7W32FU
TC7WH32FU-TE12R	TC7W32FU
TC7WH74FU(TE12R)	TC7W74FU
TL074CPWR-12	XRA10324AF
TL712CPS	TL712CP

IC	Page or ID No.
TL7705CPS-B	TL7705CP
TLC272CPS	RC4558
TLC272CPWR	RC4558
TLC272CPWR-12	RC4558
TLC2932IPWR	TLC2932IPW
TLC7733IPWR-12	TLC7733IPWR
TPS54610PWPR	TPS54610PWPR
UPC814G2-E2	RC4558
UPD6467GR-525-E2	UPD6466GS-502-E2

OTHERS	Page or ID No.
HCPL-0630-500	MA009-01

Section 3
Block Diagrams

Index **Page**

A. AT-163 3-6
AU-298 3-5

D. DAP-33 3-5
DPR-265 3-8
DPR-265C 3-9

M. MX-109 3-14

O. Overall (HDC1000/1100/1500/1550/1600) 3-2
Overall (HDC1580) 3-3

S. SDI-84 3-10
SDI-84C 3-11

T. TG-243/247 3-13
TR-136 3-15

V. VDA-63 3-12

Index

Board List

Board Name	HDC 1000	HDC 1100	HDC 1500	HDC 1550	HDC 1580	HDC 1600
AT-163	○	○	○	○	○	○
AT-166/166G*	○	○	—	—	—	—
AU-298	○	○	○	○	○	○
BI-175	○	—	○	○	○	—
BI-187	—	○	—	—	—	○
BI-188	—	○	—	—	—	○
BI-189	—	○	—	—	—	○
CN-2578	○	—	○	○	○	—
CN-2579/2579G*	○	—	○	○	○	—
CN-2602	○	○	—	—	—	—
CN-2603/2603B	○	○	—	—	—	—
CN-2604	○	○	—	—	—	—
CN-2605	○	○	—	—	—	—
CN-2606	○	○	—	—	—	—
CN-2607	○	○	—	—	—	—
CN-2608	○	○	—	—	—	—
CN-2609/2609G*	○	○	—	—	—	—
CN-2614/2614B	—	—	○	○	○	○
CN-2615	—	—	○	○	○	○
CN-2616	—	—	○	○	○	○
CN-2617	—	—	○	○	○	○
CN-2618	—	—	○	○	○	○
CN-2619/2619G*	—	—	○	○	○	○
CN-2620	—	—	○	○	○	○
CN-2621/2621G*	—	—	○	○	○	○
CN-2622	—	—	○	○	○	○
CN-2623	—	—	○	○	○	○
CN-2640	—	—	○	○	○	○
CN-2671	○	○	—	—	—	—
CN-2712	—	○	—	—	—	○
CN-2723/2723G*	—	○	—	—	—	○
DAP-33	○	○	○	○	○	○
DPR-265	○	○	○	○	—	○
DPR-265C	—	—	—	—	○	—
DR-528/528G*	○	—	○	○	○	○
DR-562/562G*	—	○	—	—	—	○
FL-337	—	—	—	○	—	—
FL-338	—	—	—	○	—	—
LE-291	○	○	—	—	—	—

Board Name	HDC 1000	HDC 1100	HDC 1500	HDC 1550	HDC 1580	HDC 1600
LE-308	—	—	○	○	○	○
LE-309	○	○	—	—	—	—
MB-1059/1059G*	—	—	○	○	○	○
MB-1060/1060G*	○	○	—	—	—	—
MX-109	—	—	—	○	—	—
PA-317/317G*	○	—	○	○	—	—
PA-317CG	—	—	—	—	○	—
PA-327/327G*	—	○	—	—	—	○
SDI-84	○	○	○	—	—	○
SDI-84C	—	—	—	—	○	—
SW-1233/1233G*	○	○	—	—	—	—
SW-1236	—	—	○	○	○	○
SW-1237	—	—	○	○	○	○
SW-1238	—	—	○	○	○	○
SW-1239	—	—	○	○	○	○
SW-1240	—	—	○	○	○	○
SW-1241/1241B	—	—	○	○	○	○
SW-1242	—	—	○	○	○	○
SW-1245	—	—	○	○	○	○
SW-1273/1273G*	—	—	○	○	○	○
TG-243/243G*	○	—	○	○	—	—
TG-243CG	○	—	○	○	○	—
TG-247/247G*	—	○	—	—	—	○
TR-136	—	—	—	○	—	—
VDA-63	○	○	○	○	○	○


注意


＊印の基板は２種類ありますが，マニュアル内の記載では簡素化するため基板名には“G”を付けていません。


Note

The board with an asterisk (*) has two types. However, the board name in the manual does not have “G” at the end for simplification.

Overall HDC1000/1100/1500/1550/1600

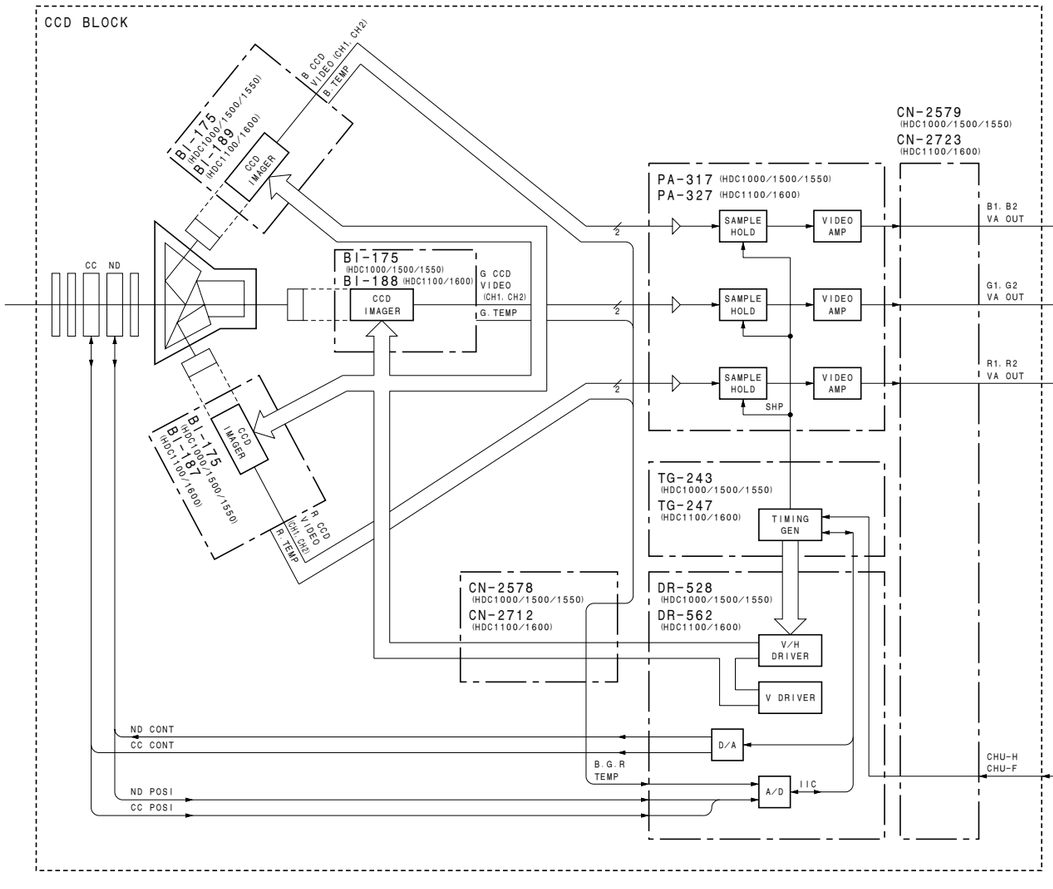

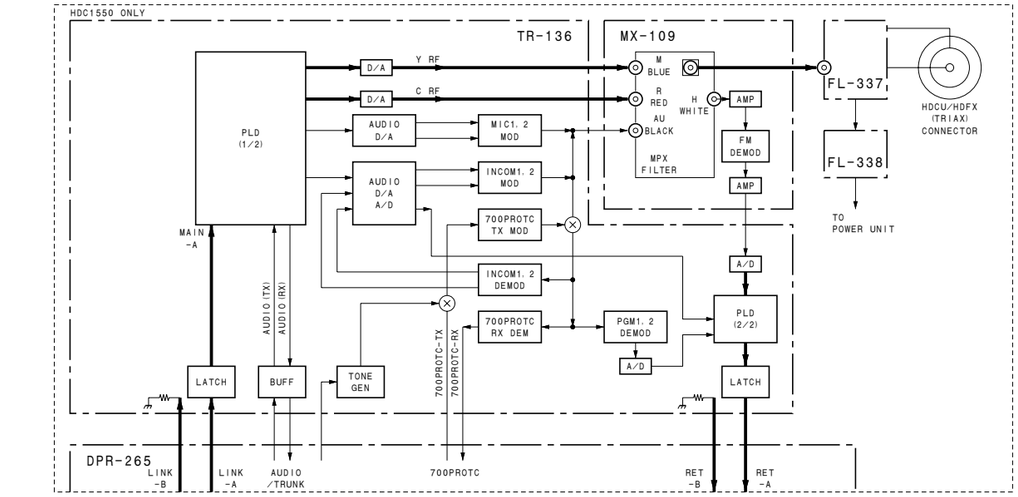


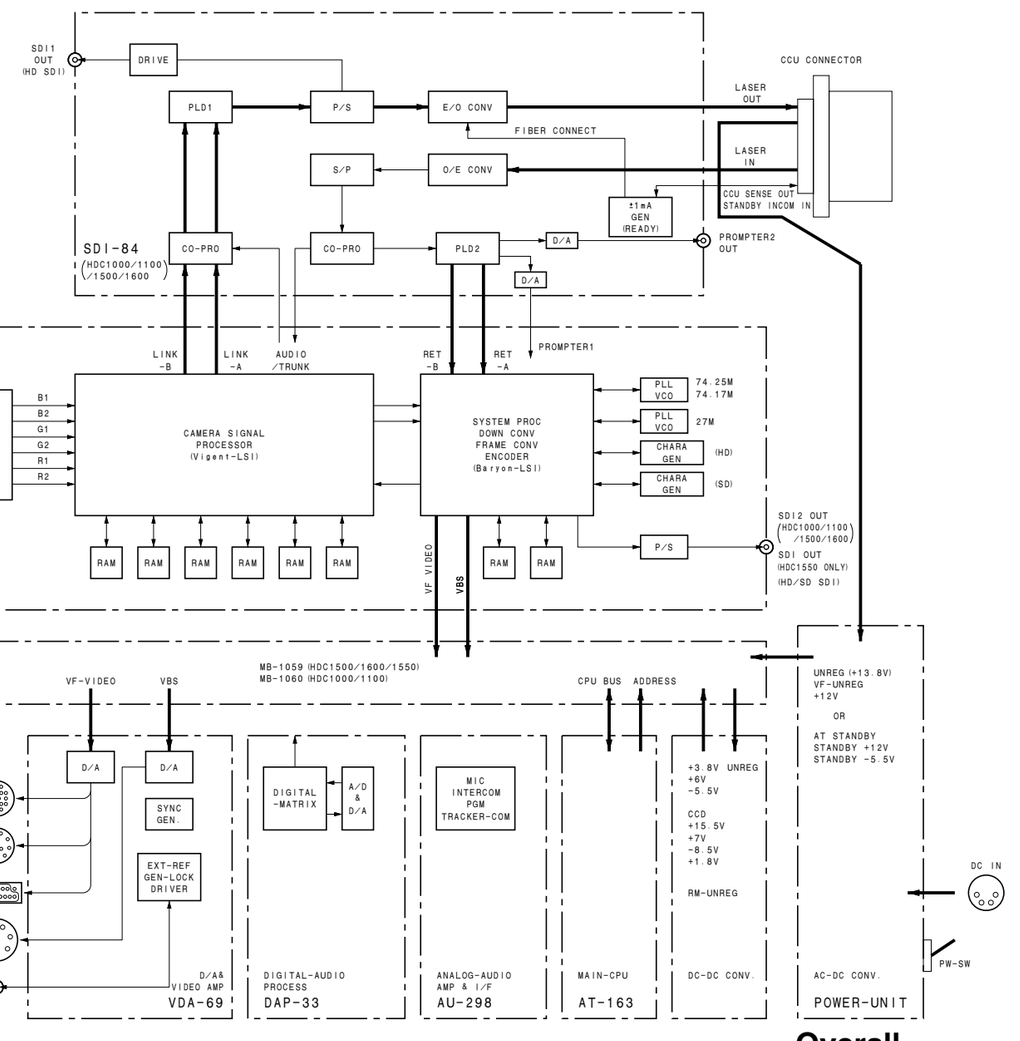


Overall


HDC1000/1100/1500/1550/1600


3-2

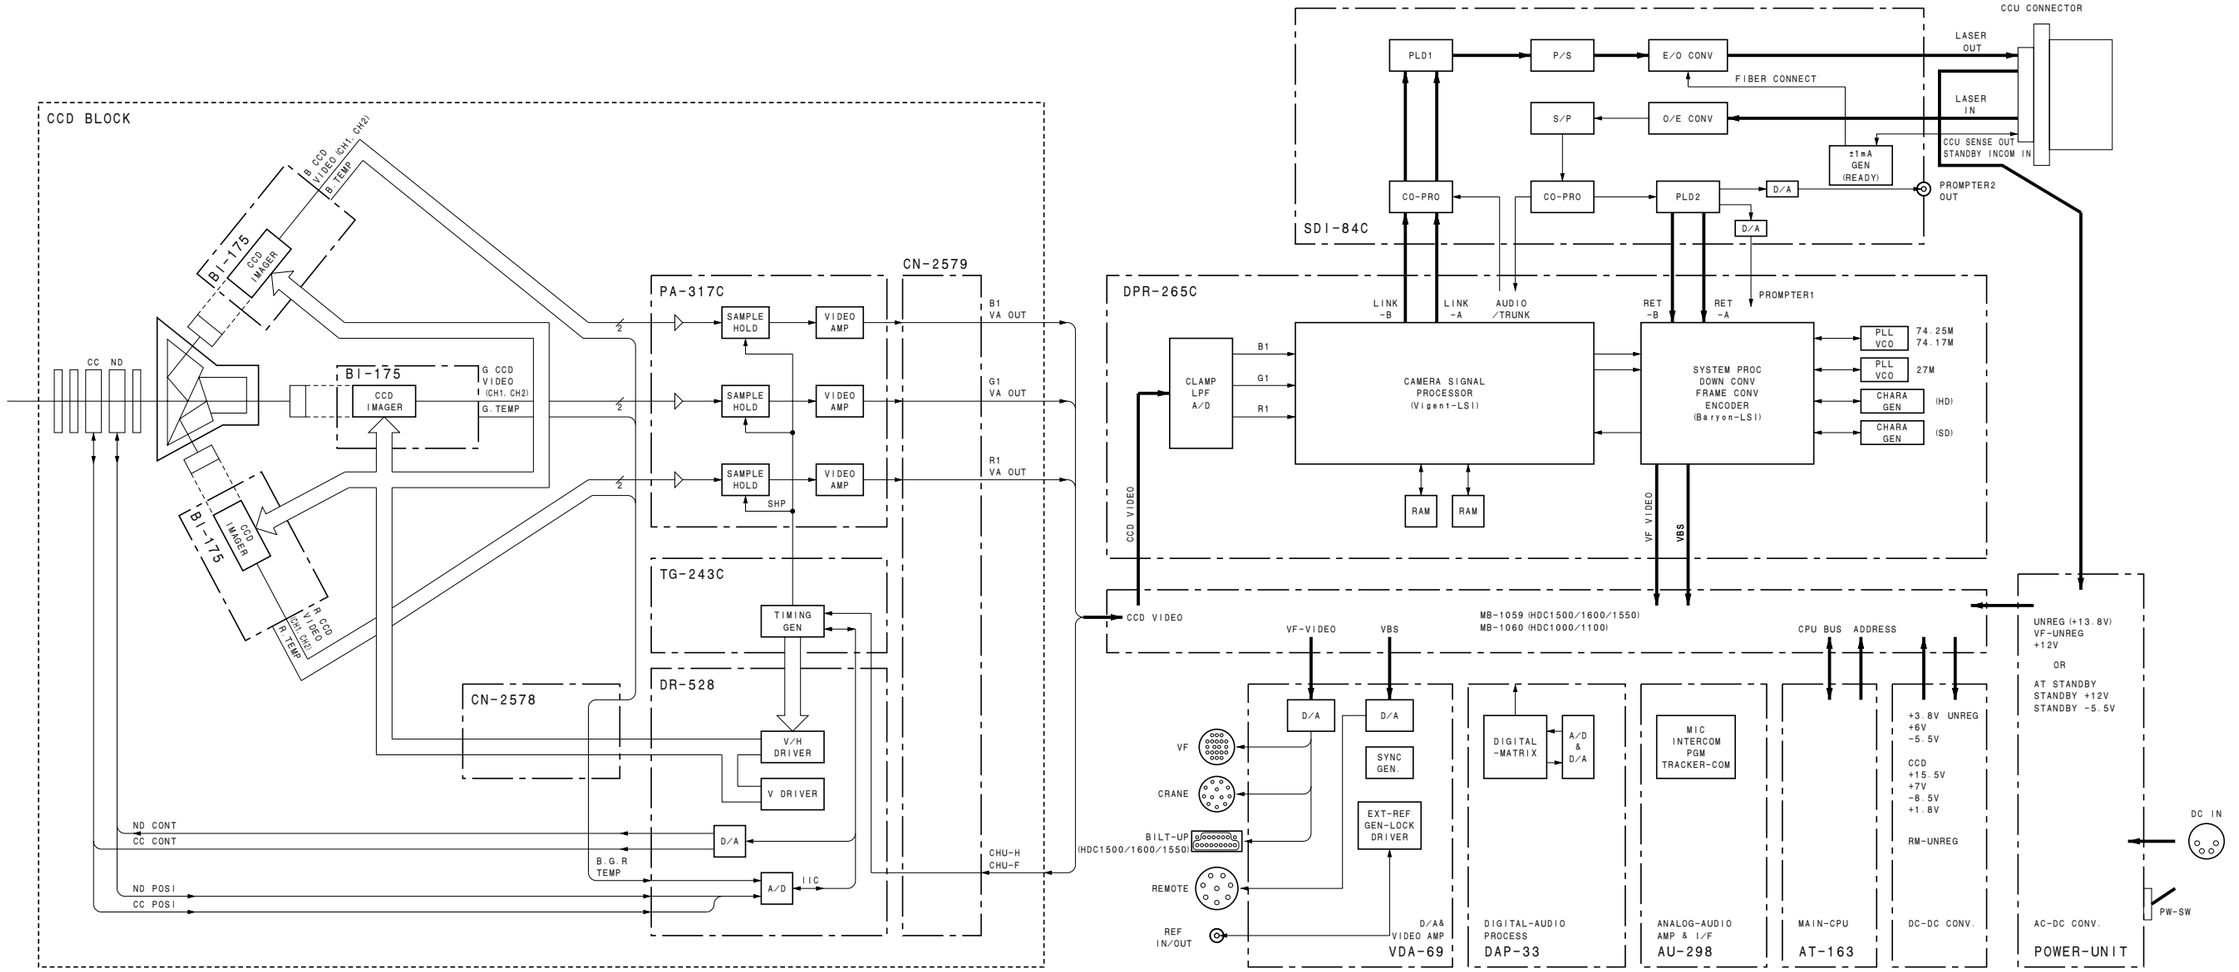


Overall
HDC1580

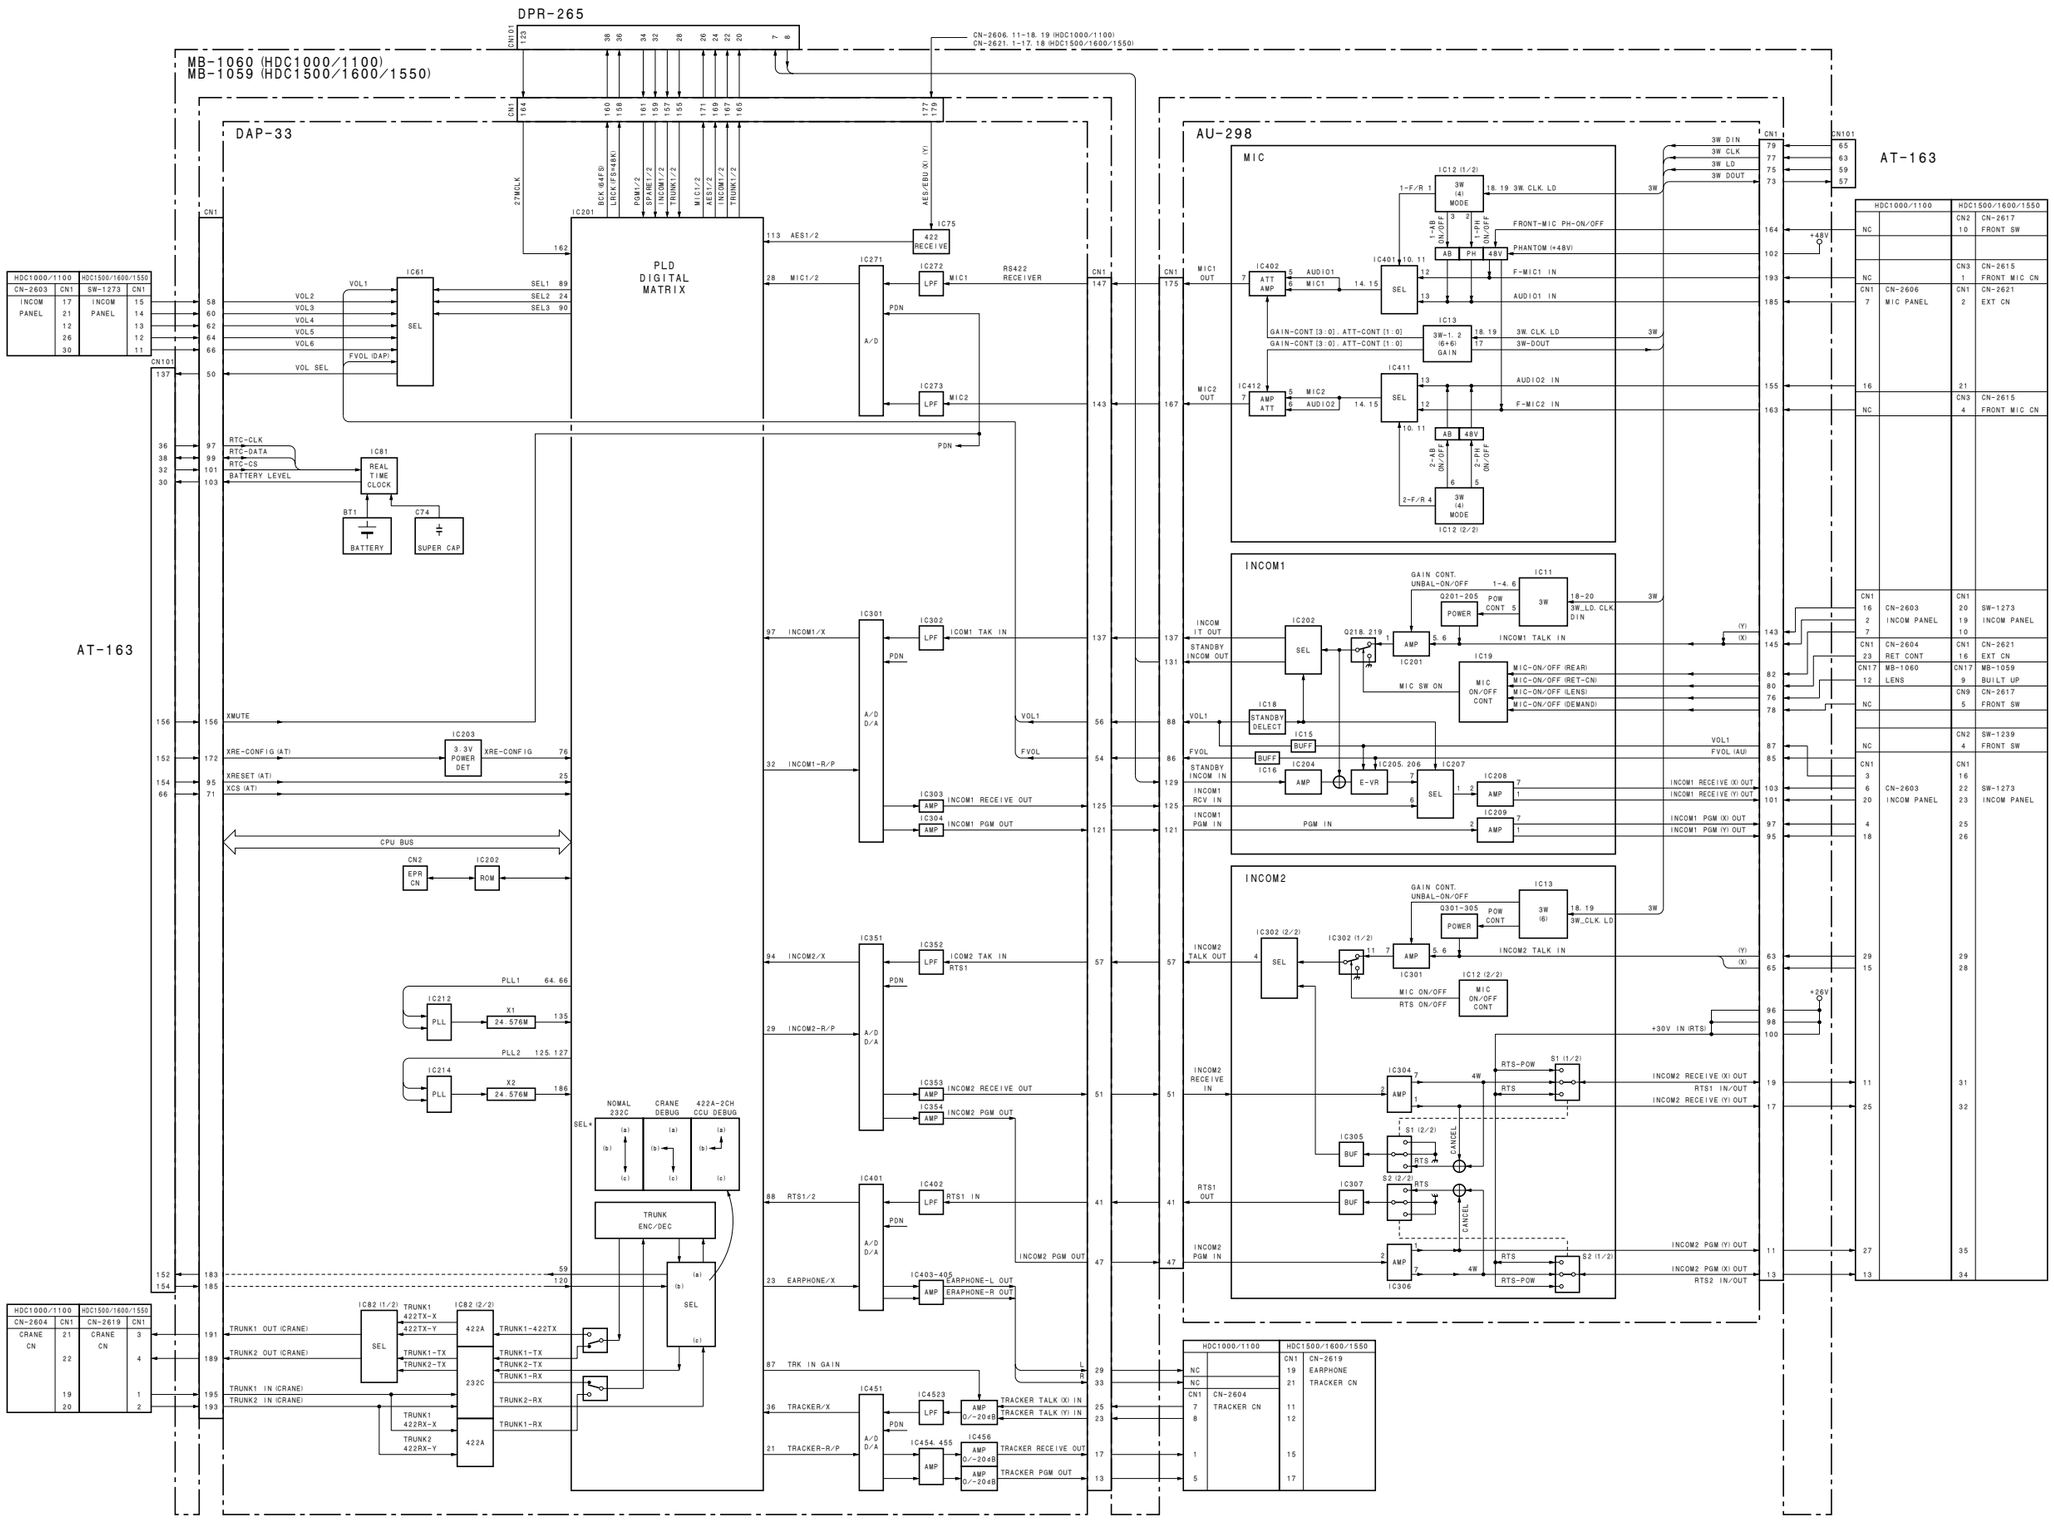
DPR-265
MB-1060 (HDC1000/1100)
MB-1059 (HDC1500/1600/1550)
DAP-33
AU-298
AT-163
PLD DIGITAL MATRIX
MIC
INCOM1
INCOM2
SEL
A/D
LPF
AMP
ATT
MODE
POWER
BUFF
ROM
REAL TIME CLOCK
BATTERY
SUPER CAP
TRUNK ENC/DEC
CPU BUS
PLL
X1 24.576M
X2 24.576M
3.3V POWER DET
232C
422A
E-VR
MIC ON/OFF CONT
STANDBY DELECT
CN-2606. 11-18. 19 (HDC1000/1100)
CN-2621. 1-17. 18 (HDC1500/1600/1550)
HDC1000/1100
HDC1500/1600/1550
CN-2603
SW-1273
CN-2604
CN-2619
CN-2606
CN-2621
SW-1239
CN-2617
CN-2615
MB-1059
MB-1060
CN-2604
TRACKER CN
EARPHONE
INCOM PANEL
MIC PANEL
FRONT SW
FRONT MIC CN
EXT CN
BUILT UP
LENS
RET CONT
CRANE CN
RECEIVE
RS422 RECEIVER
3W DIN
3W CLK
3W LD
3W DOUT
+48V
+28V
PHANTOM (+48V)
FRONT-MIC PH-ON/OFF
F-MIC1 IN
F-MIC2 IN
AUDIO1 IN
AUDIO2 IN
3W_CLK. LD
3W-DOUT
INCOM1 TALK IN
INCOM2 TALK IN
INCOM1 RECEIVE (X) OUT
INCOM1 RECEIVE (Y) OUT
INCOM1 PGM (X) OUT
INCOM1 PGM (Y) OUT
INCOM2 RECEIVE (X) OUT
INCOM2 RECEIVE (Y) OUT
INCOM2 PGM (X) OUT
INCOM2 PGM (Y) OUT
+30V IN (RTS)
RTS1 IN/OUT
RTS2 IN/OUT
MIC-ON/OFF (REAR)
MIC-ON/OFF (RET-CN)
MIC-ON/OFF (LENS)
MIC-ON/OFF (DEMAND)
MIC SW ON
TRACKER TALK (X) IN
TRACKER TALK (Y) IN
TRACKER RECEIVE OUT
TRACKER PGM OUT
TRUNK1 OUT (CRANE)
TRUNK2 OUT (CRANE)
TRUNK1 IN (CRANE)
TRUNK2 IN (CRANE)
XMUTE
XRESET (AT)
XCS (AT)
XRE-CONFIG (AT)
CPU BUS
VOL SEL
RTC-CLK
RTC-DATA
RTC-CS
BATTERY LEVEL
PLL1 64.66
PLL2 125.127
NOMAL 232C
CRANE DEBUG
422A-2CH CCU DEBUG
EARPHONE-L OUT
EARPHONE-R OUT
INCOM2 PGM OUT
TRK IN GAIN

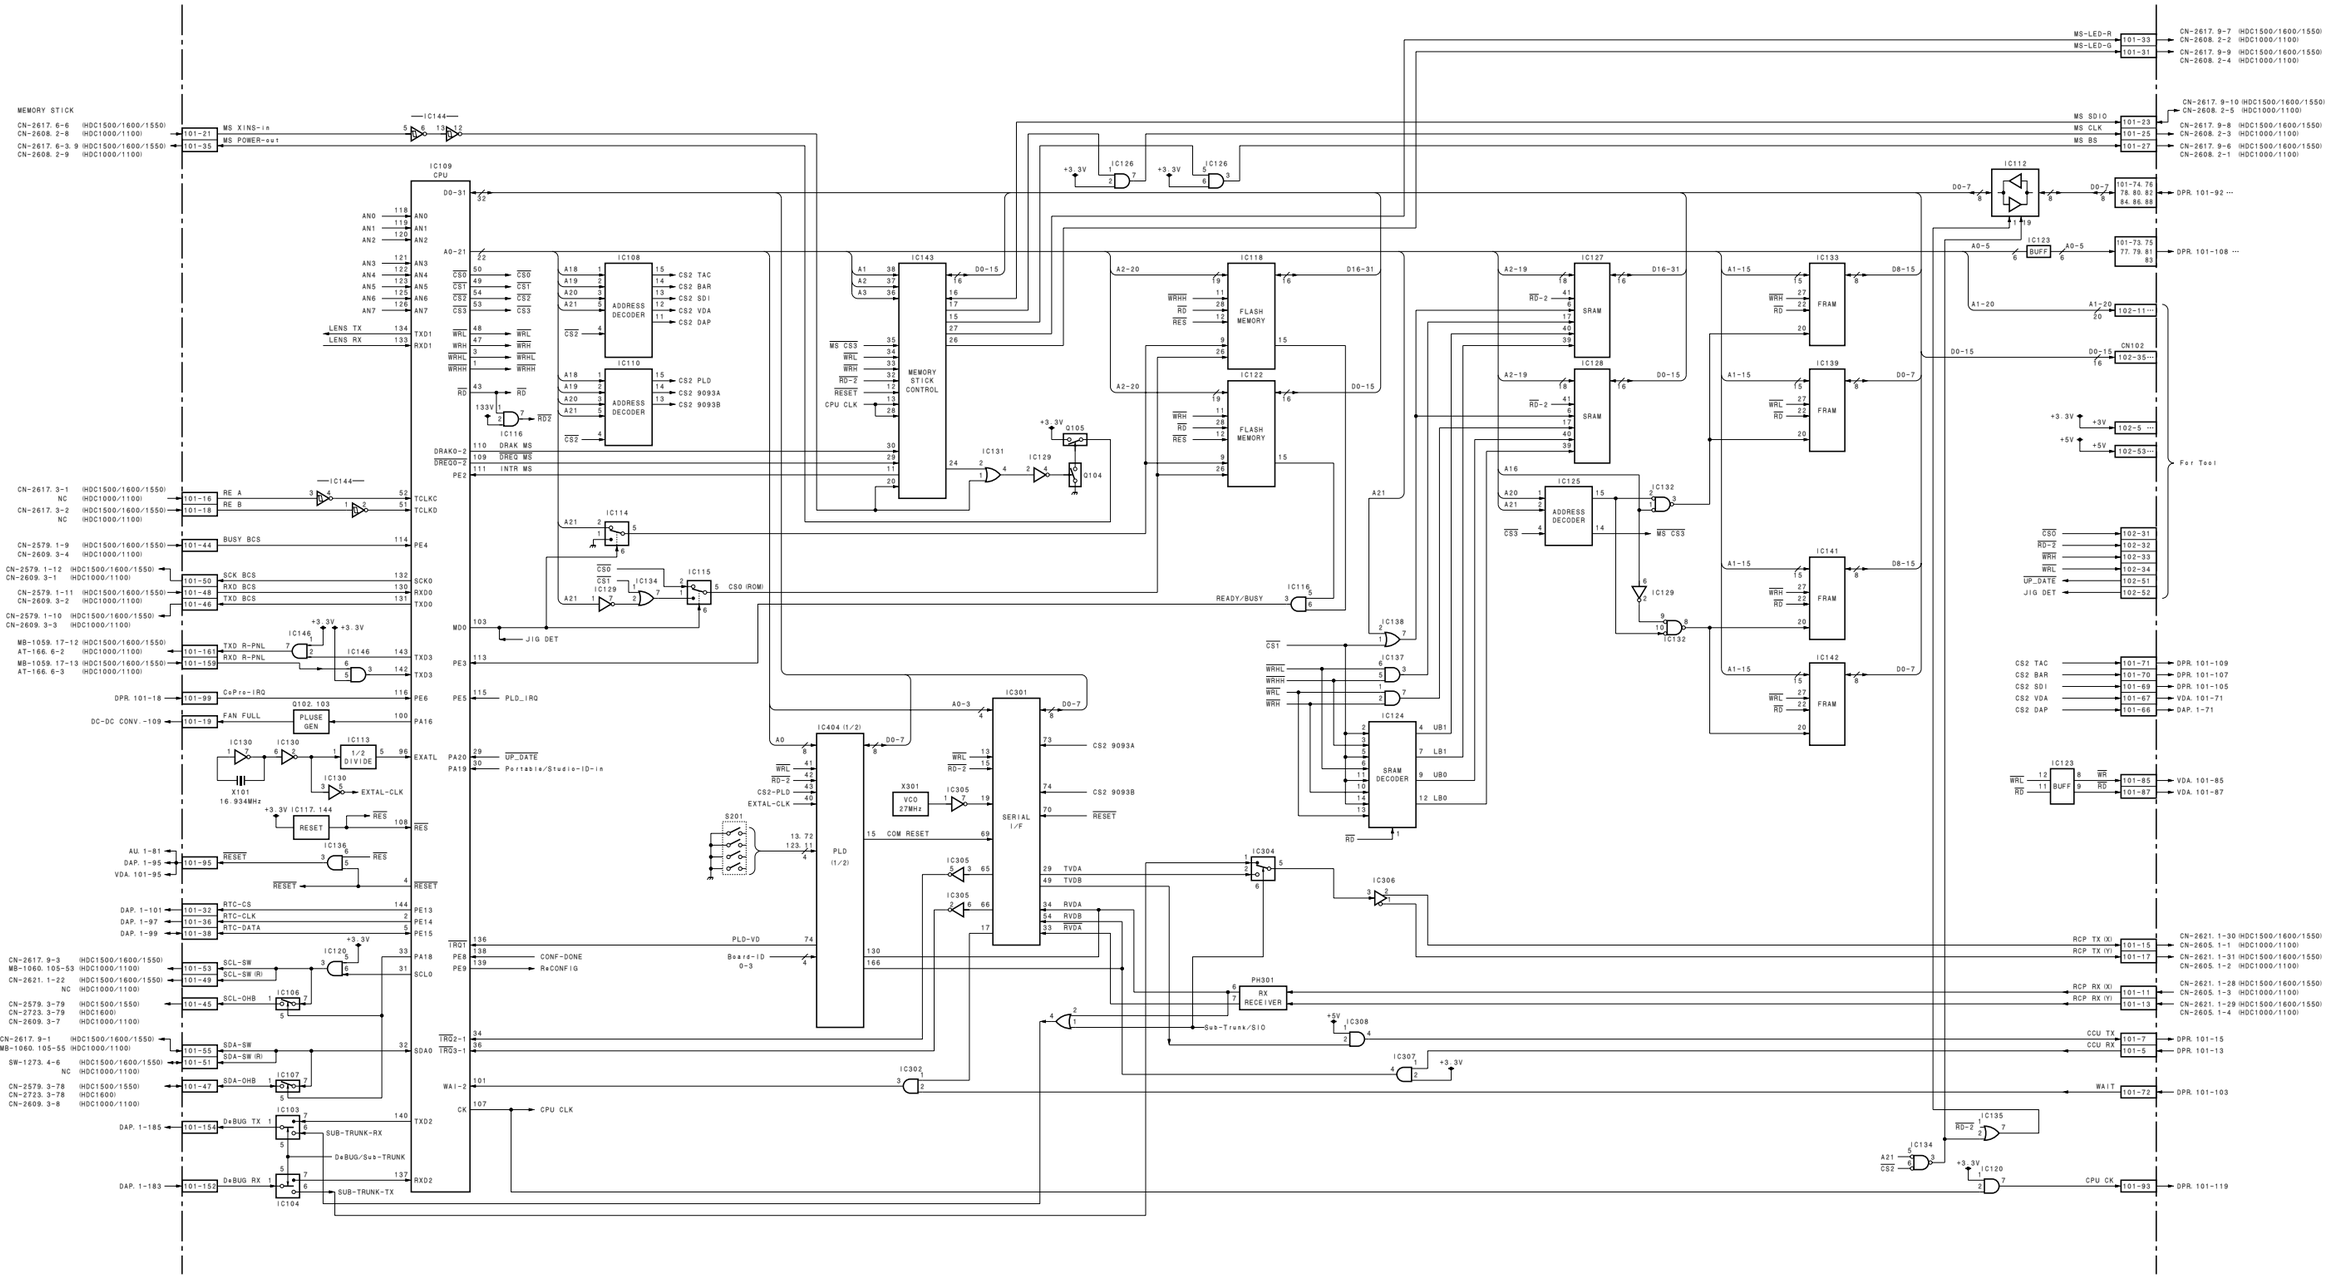

MEMORY STICK
IC109 CPU
IC143 MEMORY STICK CONTROL
IC108 ADDRESS DECODER
IC110 ADDRESS DECODER
IC118 FLASH MEMORY
IC122 FLASH MEMORY
IC127 SRAM
IC128 SRAM
IC125 ADDRESS DECODER
IC124 SRAM DECODER
IC133 FRAM
IC139 FRAM
IC141 FRAM
IC142 FRAM
IC112
IC123 BUFF
IC404 (1/2) PLD (1/2)
IC301 SERIAL I/F
X301 VCO 27MHz
X101 16.934MHz
S201
PH301 RX RECEIVER
Sub-Trunk/SIO
MS XINS-in
MS POWER-out
LENS TX
LENS RX
RE A
RE B
BUSY BCS
SCK BCS
RXD BCS
TXD BCS
TXD R-PNL
RXD R-PNL
CePro-IRQ
FAN FULL
PLUSE GEN
EXTAL-CLK
RESET
RTC-CS
RTC-CLK
RTC-DATA
SCL-SW
SCL-SW (R)
SCL-OHB
SDA-SW
SDA-SW (R)
SDA-OHB
DxBUG TX
DxBUG RX
SUB-TRUNK-RX
DxBUG/Sub-TRUNK
SUB-TRUNK-TX
DRAK MS
DREQ MS
INTR MS
JIG DET
PLD_IRQ
UP_DATE
Portable/Studio-ID-in
CONF-DONE
ReCONFIG
CPU CLK
CS0 (ROM)
READY/BUSY
COM RESET
CS2 9093A
CS2 9093B
CS2 TAC
CS2 BAR
CS2 SDI
CS2 VDA
CS2 DAP
CS2 PLD
CS2 9093A
CS2 9093B
MS-LED-R
MS-LED-G
MS SDIO
MS CLK
MS BS
DPR. 101-92 ···
DPR. 101-108 ···
Far Tool
DPR. 101-109
DPR. 101-107
DPR. 101-105
VDA. 101-71
DAP. 1-71
VDA. 101-85
VDA. 101-87
RCP TX (X)
RCP TX (Y)
RCP RX (X)
RCP RX (Y)
CCU TX
CCU RX
WAIT
CPU CK
DPR. 101-119
DPR. 101-15
DPR. 101-13
DPR. 101-103

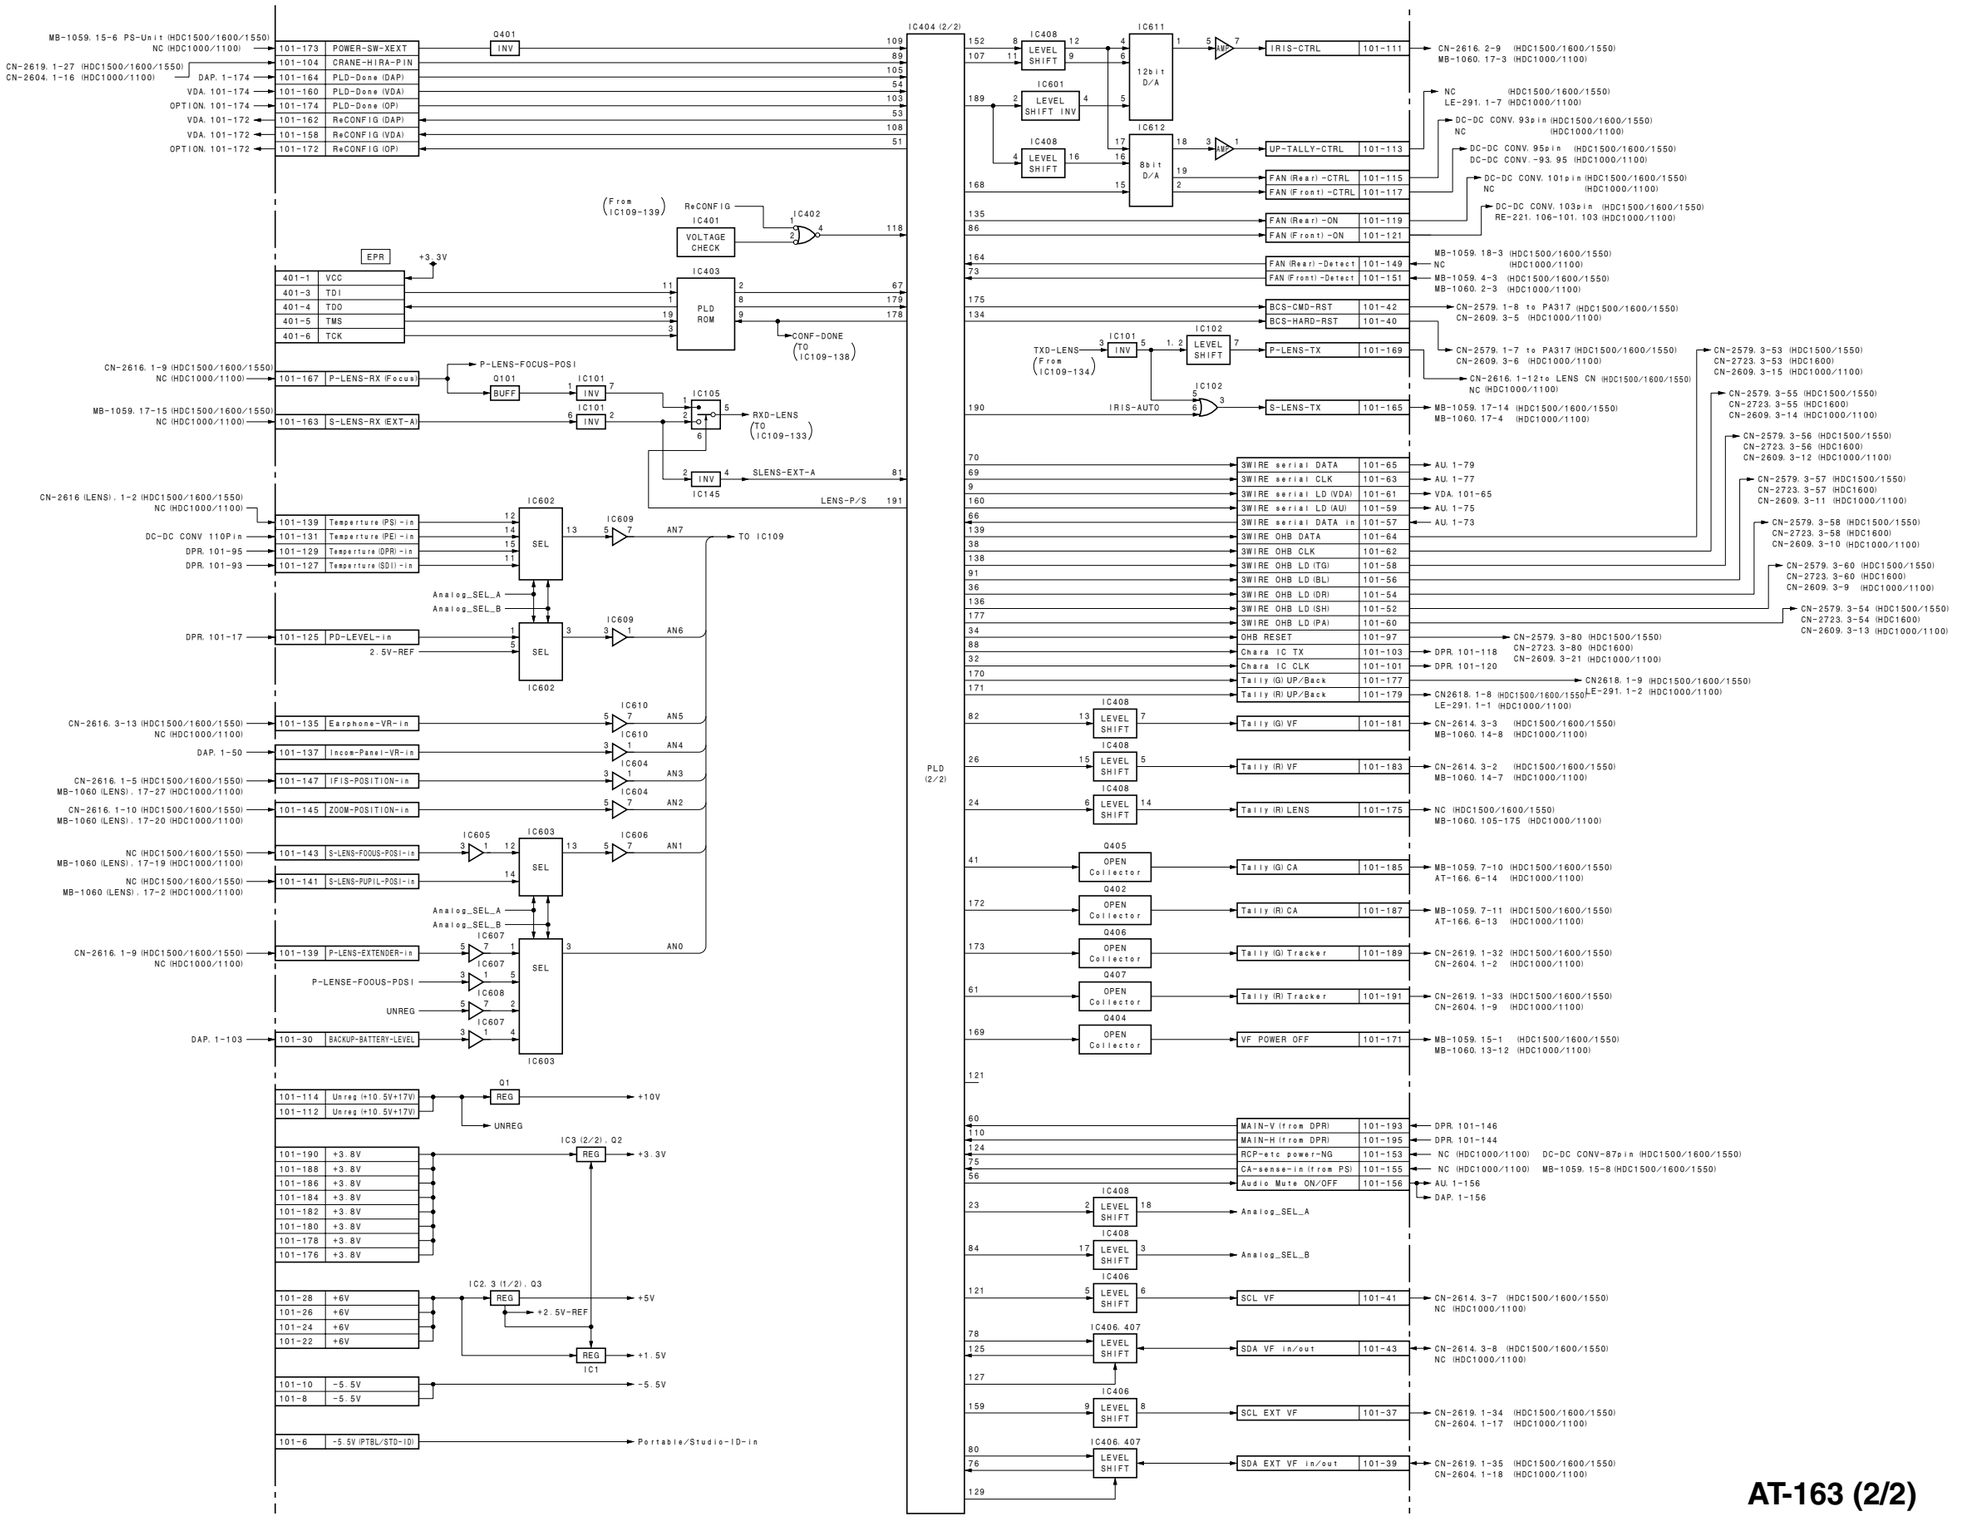
MB-1059. 15-6 PS-Unit (HDC1500/1600/1550)
NC (HDC1000/1100)
CN-2619. 1-27 (HDC1500/1600/1550)
CN-2604. 1-16 (HDC1000/1100)
DAP. 1-174
VDA. 101-174
OPTION. 101-174
VDA. 101-172
VDA. 101-172
OPTION. 101-172
101-173 POWER-SW-XEXT
101-104 CRANE-HIRA-PIN
101-164 PLD-Done (DAP)
101-160 PLD-Done (VDA)
101-174 PLD-Done (OP)
101-162 ReCONFIG (DAP)
101-158 ReCONFIG (VDA)
101-172 ReCONFIG (OP)
Q401
INV
IC404 (2/2)
109
89
105
54
103
53
108
51
(From IC109-139)
ReCONFIG
IC401
VOLTAGE CHECK
IC402
118
EPR
+3.3V
401-1 VCC
401-3 TDI
401-4 TDO
401-5 TMS
401-6 TCK
IC403
PLD ROM
67
179
178
CONF-DONE
(TO IC109-138)
CN-2616. 1-9 (HDC1500/1600/1550)
NC (HDC1000/1100)
101-167 P-LENS-RX (Focus)
P-LENS-FOCUS-POSI
Q101
BUFF
IC101
INV
IC105
RXD-LENS
(TO IC109-133)
MB-1059. 17-15 (HDC1500/1600/1550)
NC (HDC1000/1100)
101-163 S-LENS-RX (EXT-A)
SLENS-EXT-A
81
IC145
LENS-P/S
191
CN-2616 (LENS). 1-2 (HDC1500/1600/1550)
NC (HDC1000/1100)
DC-DC CONV 110Pin
DPR. 101-95
DPR. 101-93
101-139 Temperture (PS)-in
101-131 Temperture (PE)-in
101-129 Temperture (DPR)-in
101-127 Temperture (SDI)-in
IC602
SEL
IC609
AN7
TO IC109
Analog_SEL_A
Analog_SEL_B
DPR. 101-17
101-125 PD-LEVEL-in
2.5V-REF
AN6
CN-2616. 3-13 (HDC1500/1600/1550)
NC (HDC1000/1100)
101-135 Earphone-VR-in
IC610
AN5
DAP. 1-50
101-137 Incom-Panel-VR-in
AN4
CN-2616. 1-5 (HDC1500/1600/1550)
MB-1060 (LENS). 17-27 (HDC1000/1100)
101-147 IFIS-POSITION-in
IC604
AN3
CN-2616. 1-10 (HDC1500/1600/1550)
MB-1060 (LENS). 17-20 (HDC1000/1100)
101-145 ZOOM-POSITION-in
AN2
NC (HDC1500/1600/1550)
MB-1060 (LENS). 17-19 (HDC1000/1100)
101-143 S-LENS-FOCUS-POSI-in
IC605
IC606
IC603
AN1
NC (HDC1500/1600/1550)
MB-1060 (LENS). 17-2 (HDC1000/1100)
101-141 S-LENS-PUPIL-POSI-in
Analog_SEL_A
Analog_SEL_B
CN-2616. 1-9 (HDC1500/1600/1550)
NC (HDC1000/1100)
101-139 P-LENS-EXTENDER-in
IC607
ANO
P-LENSE-FOCUS-POSI
IC608
UNREG
DAP. 1-103
101-30 BACKUP-BATTERY-LEVEL
Q1
REG
101-114 Unreg (+10.5V+17V)
101-112 Unreg (+10.5V+17V)
+10V
UNREG
IC3 (2/2). Q2
+3.3V
101-190 +3.8V
101-188 +3.8V
101-186 +3.8V
101-184 +3.8V
101-182 +3.8V
101-180 +3.8V
101-178 +3.8V
101-176 +3.8V
IC2. 3 (1/2). Q3
+5V
+2.5V-REF
+1.5V
IC1
101-28 +6V
101-26 +6V
101-24 +6V
101-22 +6V
-5.5V
101-10 -5.5V
101-8 -5.5V
101-6 -5.5V (PTBL/STD-ID)
Portable/Studio-ID-in
PLD (2/2)
152
107
189
168
135
86
164
73
175
134
190
IC408
LEVEL SHIFT
IC601
LEVEL SHIFT INV
IC611
12bit D/A
IC612
8bit D/A
IRIS-CTRL 101-111
UP-TALLY-CTRL 101-113
FAN (Rear)-CTRL 101-115
FAN (Front)-CTRL 101-117
FAN (Rear)-ON 101-119
FAN (Front)-ON 101-121
FAN (Rear)-Detect 101-149
FAN (Front)-Detect 101-151
BCS-CMD-RST 101-42
BCS-HARD-RST 101-40
TXD-LENS
(From IC109-134)
IC101
IC102
P-LENS-TX 101-169
IRIS-AUTO
S-LENS-TX 101-165
CN-2616. 2-9 (HDC1500/1600/1550)
MB-1060. 17-3 (HDC1000/1100)
NC (HDC1500/1600/1550)
LE-291. 1-7 (HDC1000/1100)
DC-DC CONV. 93pin (HDC1500/1600/1550)
NC (HDC1000/1100)
DC-DC CONV. 95pin (HDC1500/1600/1550)
DC-DC CONV. -93. 95 (HDC1000/1100)
DC-DC CONV. 101pin (HDC1500/1600/1550)
NC (HDC1000/1100)
DC-DC CONV. 103pin (HDC1500/1600/1550)
RE-221. 106-101. 103 (HDC1000/1100)
MB-1059. 18-3 (HDC1500/1600/1550)
NC (HDC1000/1100)
MB-1059. 4-3 (HDC1500/1600/1550)
MB-1060. 2-3 (HDC1000/1100)
CN-2579. 1-8 to PA317 (HDC1500/1600/1550)
CN-2609. 3-5 (HDC1000/1100)
CN-2579. 1-7 to PA317 (HDC1500/1600/1550)
CN-2609. 3-6 (HDC1000/1100)
CN-2616. 1-12to LENS CN (HDC1500/1600/1550)
NC (HDC1000/1100)
MB-1059. 17-14 (HDC1500/1600/1550)
MB-1060. 17-4 (HDC1000/1100)
70
69
9
160
66
139
38
138
91
36
136
177
34
88
32
170
171
82
26
24
41
172
173
61
169
121
3WIRE serial DATA 101-65
3WIRE serial CLK 101-63
3WIRE serial LD (VDA) 101-61
3WIRE serial LD (AU) 101-59
3WIRE serial DATA in 101-57
3WIRE OHB DATA 101-64
3WIRE OHB CLK 101-62
3WIRE OHB LD (TG) 101-58
3WIRE OHB LD (BL) 101-56
3WIRE OHB LD (DR) 101-54
3WIRE OHB LD (SH) 101-52
3WIRE OHB LD (PA) 101-60
OHB RESET 101-97
Chara IC TX 101-103
Chara IC CLK 101-101
Tally (G) UP/Back 101-177
Tally (R) UP/Back 101-179
Tally (G) VF 101-181
Tally (R) VF 101-183
Tally (R) LENS 101-175
Q405
Q402
Q406
Q407
Q404
OPEN Collector
Tally (G) CA 101-185
Tally (R) CA 101-187
Tally (G) Tracker 101-189
Tally (R) Tracker 101-191
VF POWER OFF 101-171
AU. 1-79
AU. 1-77
VDA. 101-65
AU. 1-75
AU. 1-73
CN-2579. 3-53 (HDC1500/1550)
CN-2723. 3-53 (HDC1600)
CN-2609. 3-15 (HDC1000/1100)
CN-2579. 3-55 (HDC1500/1550)
CN-2723. 3-55 (HDC1600)
CN-2609. 3-14 (HDC1000/1100)
CN-2579. 3-56 (HDC1500/1550)
CN-2723. 3-56 (HDC1600)
CN-2609. 3-12 (HDC1000/1100)
CN-2579. 3-57 (HDC1500/1550)
CN-2723. 3-57 (HDC1600)
CN-2609. 3-11 (HDC1000/1100)
CN-2579. 3-58 (HDC1500/1550)
CN-2723. 3-58 (HDC1600)
CN-2609. 3-10 (HDC1000/1100)
CN-2579. 3-60 (HDC1500/1550)
CN-2723. 3-60 (HDC1600)
CN-2609. 3-9 (HDC1000/1100)
CN-2579. 3-54 (HDC1500/1550)
CN-2723. 3-54 (HDC1600)
CN-2609. 3-13 (HDC1000/1100)
CN-2579. 3-80 (HDC1500/1550)
CN-2723. 3-80 (HDC1600)
CN-2609. 3-21 (HDC1000/1100)
DPR. 101-118
DPR. 101-120
CN2618. 1-9 (HDC1500/1600/1550)
LE-291. 1-2 (HDC1000/1100)
CN2618. 1-8 (HDC1500/1600/1550)
LE-291. 1-1 (HDC1000/1100)
CN-2614. 3-3 (HDC1500/1600/1550)
MB-1060. 14-8 (HDC1000/1100)
CN-2614. 3-2 (HDC1500/1600/1550)
MB-1060. 14-7 (HDC1000/1100)
NC (HDC1500/1600/1550)
MB-1060. 105-175 (HDC1000/1100)
MB-1059. 7-10 (HDC1500/1600/1550)
AT-166. 6-14 (HDC1000/1100)
MB-1059. 7-11 (HDC1500/1600/1550)
AT-166. 6-13 (HDC1000/1100)
CN-2619. 1-32 (HDC1500/1600/1550)
CN-2604. 1-2 (HDC1000/1100)
CN-2619. 1-33 (HDC1500/1600/1550)
CN-2604. 1-9 (HDC1000/1100)
MB-1059. 15-1 (HDC1500/1600/1550)
MB-1060. 13-12 (HDC1000/1100)
110
124
75
56
23
84
121
78
125
127
159
80
76
129
MAIN-V (from DPR) 101-193
MAIN-H (from DPR) 101-195
RCP-etc power-NG 101-153
CA-sense-in (from PS) 101-155
Audio Mute ON/OFF 101-156
Analog_SEL_A
Analog_SEL_B
SCL VF 101-41
SDA VF in/out 101-43
SCL EXT VF 101-37
SDA EXT VF in/out 101-39
IC406. 407
IC406
DPR. 101-146
DPR. 101-144
NC (HDC1000/1100) DC-DC CONV-87pin (HDC1500/1600/1550)
NC (HDC1000/1100) MB-1059. 15-8 (HDC1500/1600/1550)
AU. 1-156
DAP. 1-156
CN-2614. 3-7 (HDC1500/1600/1550)
NC (HDC1000/1100)
CN-2614. 3-8 (HDC1500/1600/1550)
NC (HDC1000/1100)
CN-2619. 1-34 (HDC1500/1600/1550)
CN-2604. 1-17 (HDC1000/1100)
CN-2619. 1-35 (HDC1500/1600/1550)
CN-2604. 1-18 (HDC1000/1100)


AT-163 (2/2)

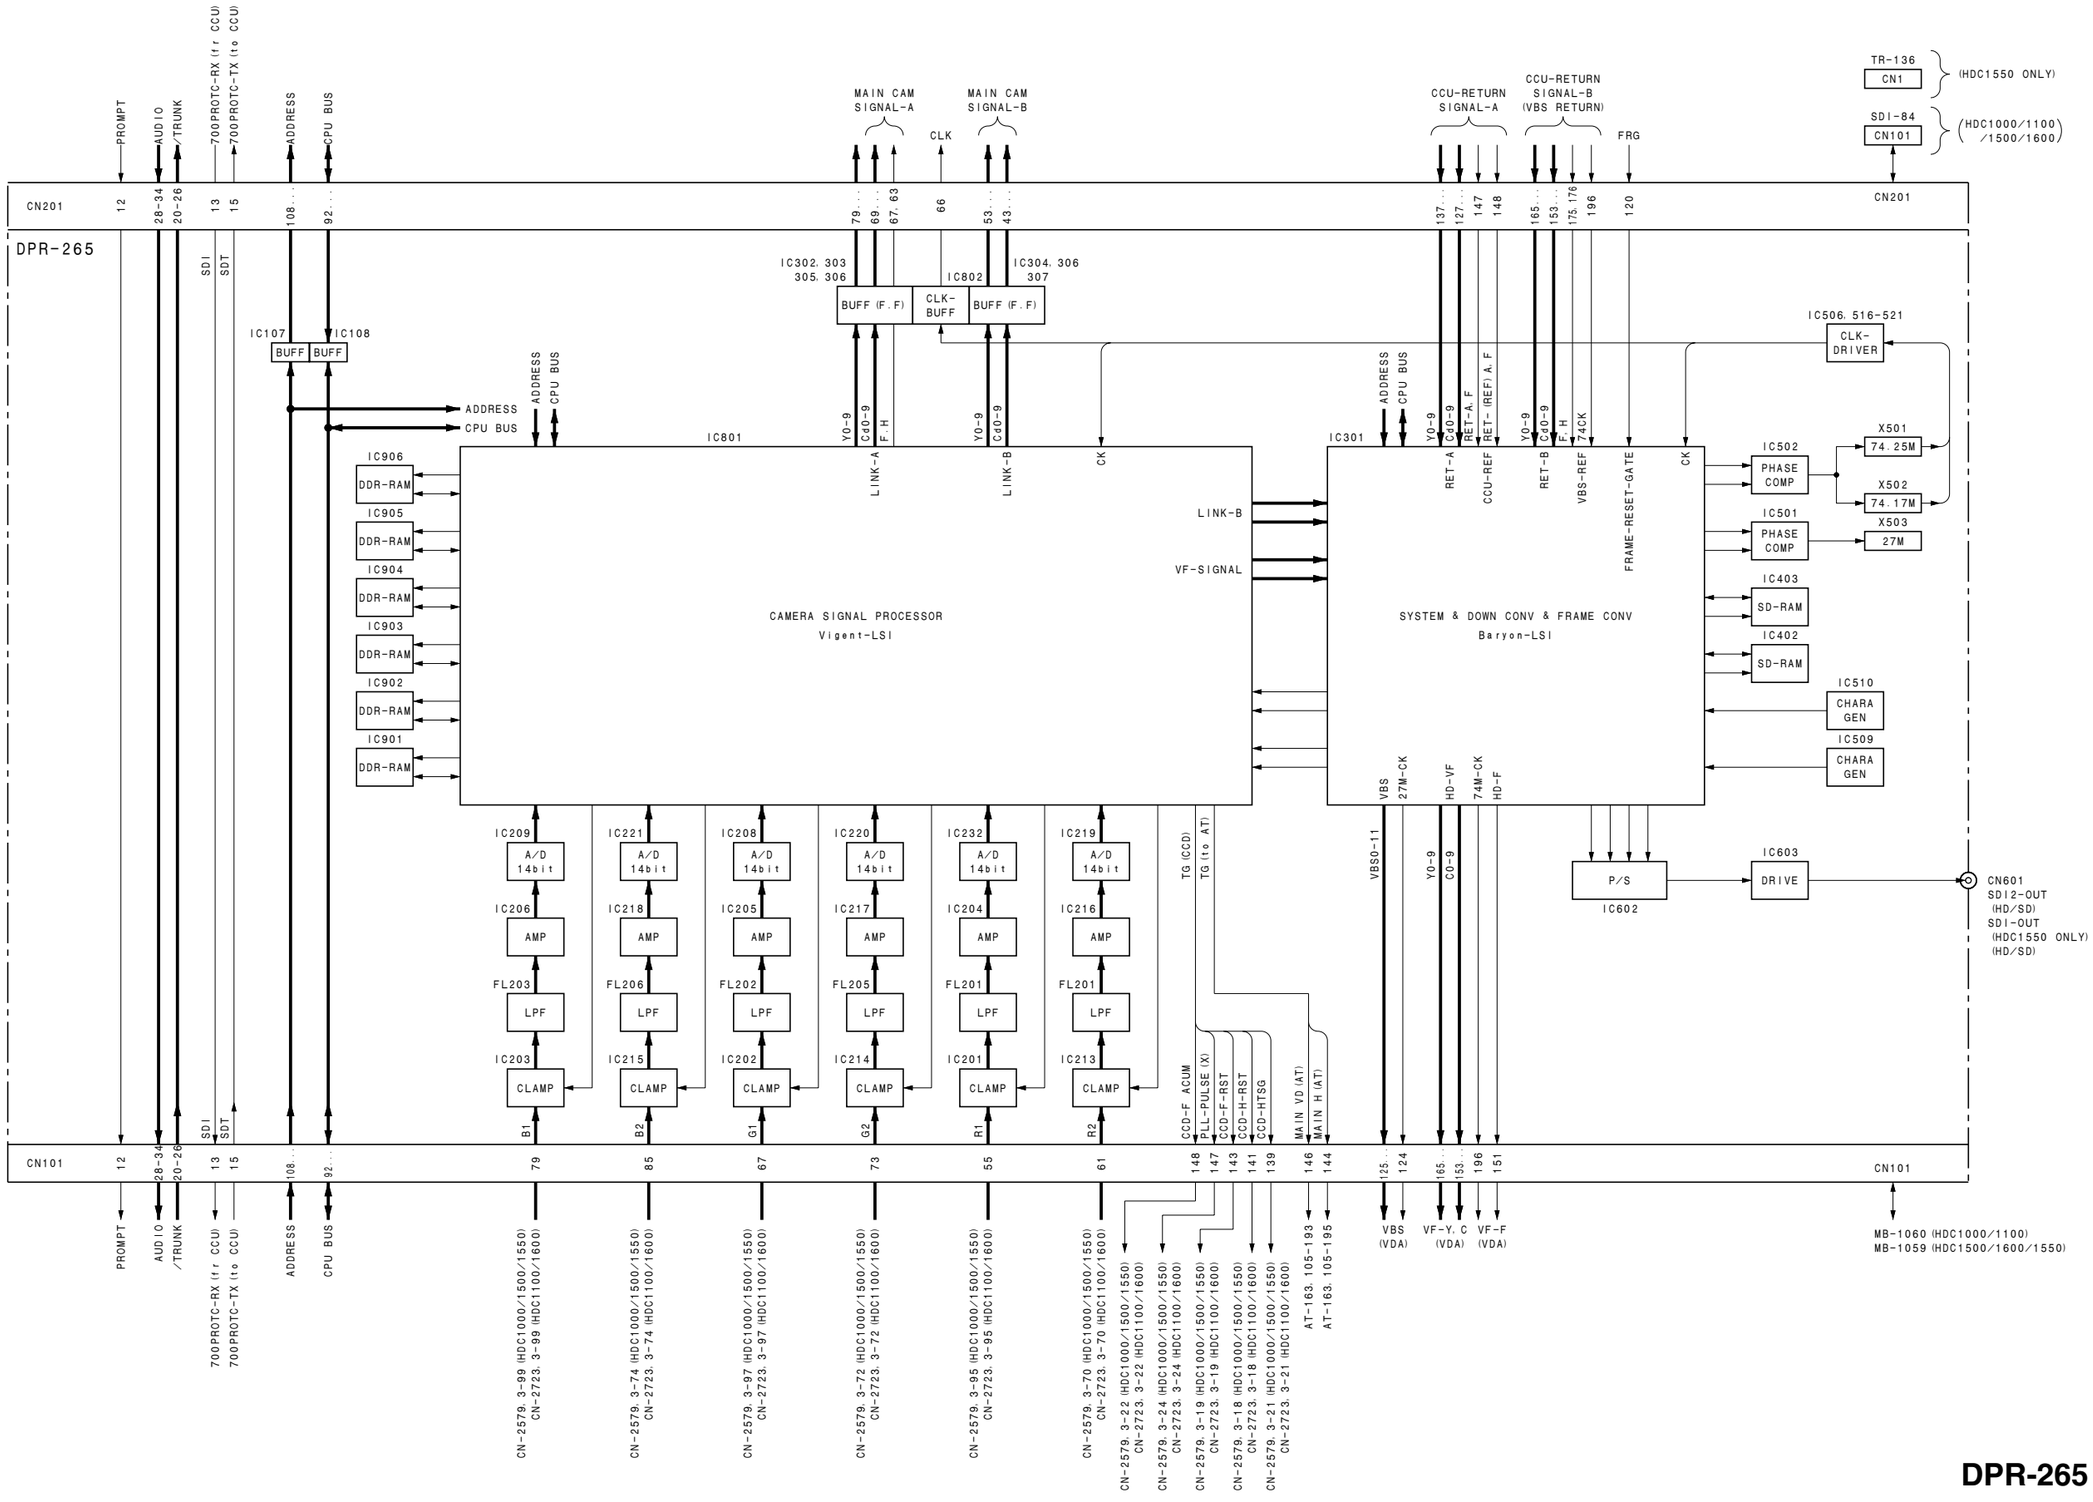
DPR-265
CN201
PROMPT
AUDIO
/TRUNK
700PROTC-RX (fr CCU)
700PROTC-TX (to CCU)
ADDRESS
CPU BUS
SDI
SDT
MAIN CAM SIGNAL-A
MAIN CAM SIGNAL-B
CLK
CCU-RETURN SIGNAL-A
CCU-RETURN SIGNAL-B (VBS RETURN)
FRG
TR-136
CN1
(HDC1550 ONLY)
SDI-84
CN101
(HDC1000/1100 /1500/1600)
IC107
IC108
BUFF
IC302, 303 305, 306
IC802
IC304, 306 307
BUFF (F.F)
CLK-BUFF
IC506, 516-521
CLK-DRIVER
IC801
IC301
CAMERA SIGNAL PROCESSOR
Vigent-LSI
SYSTEM & DOWN CONV & FRAME CONV
Baryon-LSI
LINK-A
LINK-B
VF-SIGNAL
CK
FRAME-RESET-GATE
IC906
IC905
IC904
IC903
IC902
IC901
DDR-RAM
IC502
PHASE COMP
IC501
X501
74.25M
X502
74.17M
X503
27M
IC403
SD-RAM
IC402
IC510
CHARA GEN
IC509
IC209
IC221
IC208
IC220
IC232
IC219
A/D 14bit
IC206
IC218
IC205
IC217
IC204
IC216
AMP
FL203
FL206
FL202
FL205
FL201
LPF
IC203
IC215
IC202
IC214
IC201
IC213
CLAMP
B1
B2
G1
G2
R1
R2
TG (CCD)
TG (to AT)
CCD-F ACUM
PLL-PULSE (X)
CCD-F-RST
CCD-H-RST
CCD-HTSG
MAIN VD (AT)
MAIN H (AT)
VBS
27M-CK
HD-VF
74M-CK
HD-F
VBS0-11
Y0-9
C0-9
P/S
IC602
IC603
DRIVE
CN601
SDI2-OUT (HD/SD)
SDI-OUT (HDC1550 ONLY) (HD/SD)
MB-1060 (HDC1000/1100)
MB-1059 (HDC1500/1600/1550)
VBS (VDA)
VF-Y, C (VDA)
VF-F (VDA)
AT-163, 105-193
AT-163, 105-195
CN-2579, 3-99 (HDC1000/1500/1550)
CN-2723, 3-99 (HDC1100/1600)
CN-2579, 3-74 (HDC1000/1500/1550)
CN-2723, 3-74 (HDC1100/1600)
CN-2579, 3-97 (HDC1000/1500/1550)
CN-2723, 3-97 (HDC1100/1600)
CN-2579, 3-72 (HDC1000/1500/1550)
CN-2723, 3-72 (HDC1100/1600)
CN-2579, 3-95 (HDC1000/1500/1550)
CN-2723, 3-95 (HDC1100/1600)
CN-2579, 3-70 (HDC1000/1500/1550)
CN-2723, 3-70 (HDC1100/1600)
CN-2579, 3-22 (HDC1000/1500/1550)
CN-2723, 3-22 (HDC1100/1600)
CN-2579, 3-24 (HDC1000/1500/1550)
CN-2723, 3-24 (HDC1100/1600)
CN-2579, 3-19 (HDC1000/1500/1550)
CN-2723, 3-19 (HDC1100/1600)
CN-2579, 3-18 (HDC1000/1500/1550)
CN-2723, 3-18 (HDC1100/1600)
CN-2579, 3-21 (HDC1000/1500/1550)
CN-2723, 3-21 (HDC1100/1600)


DPR-265

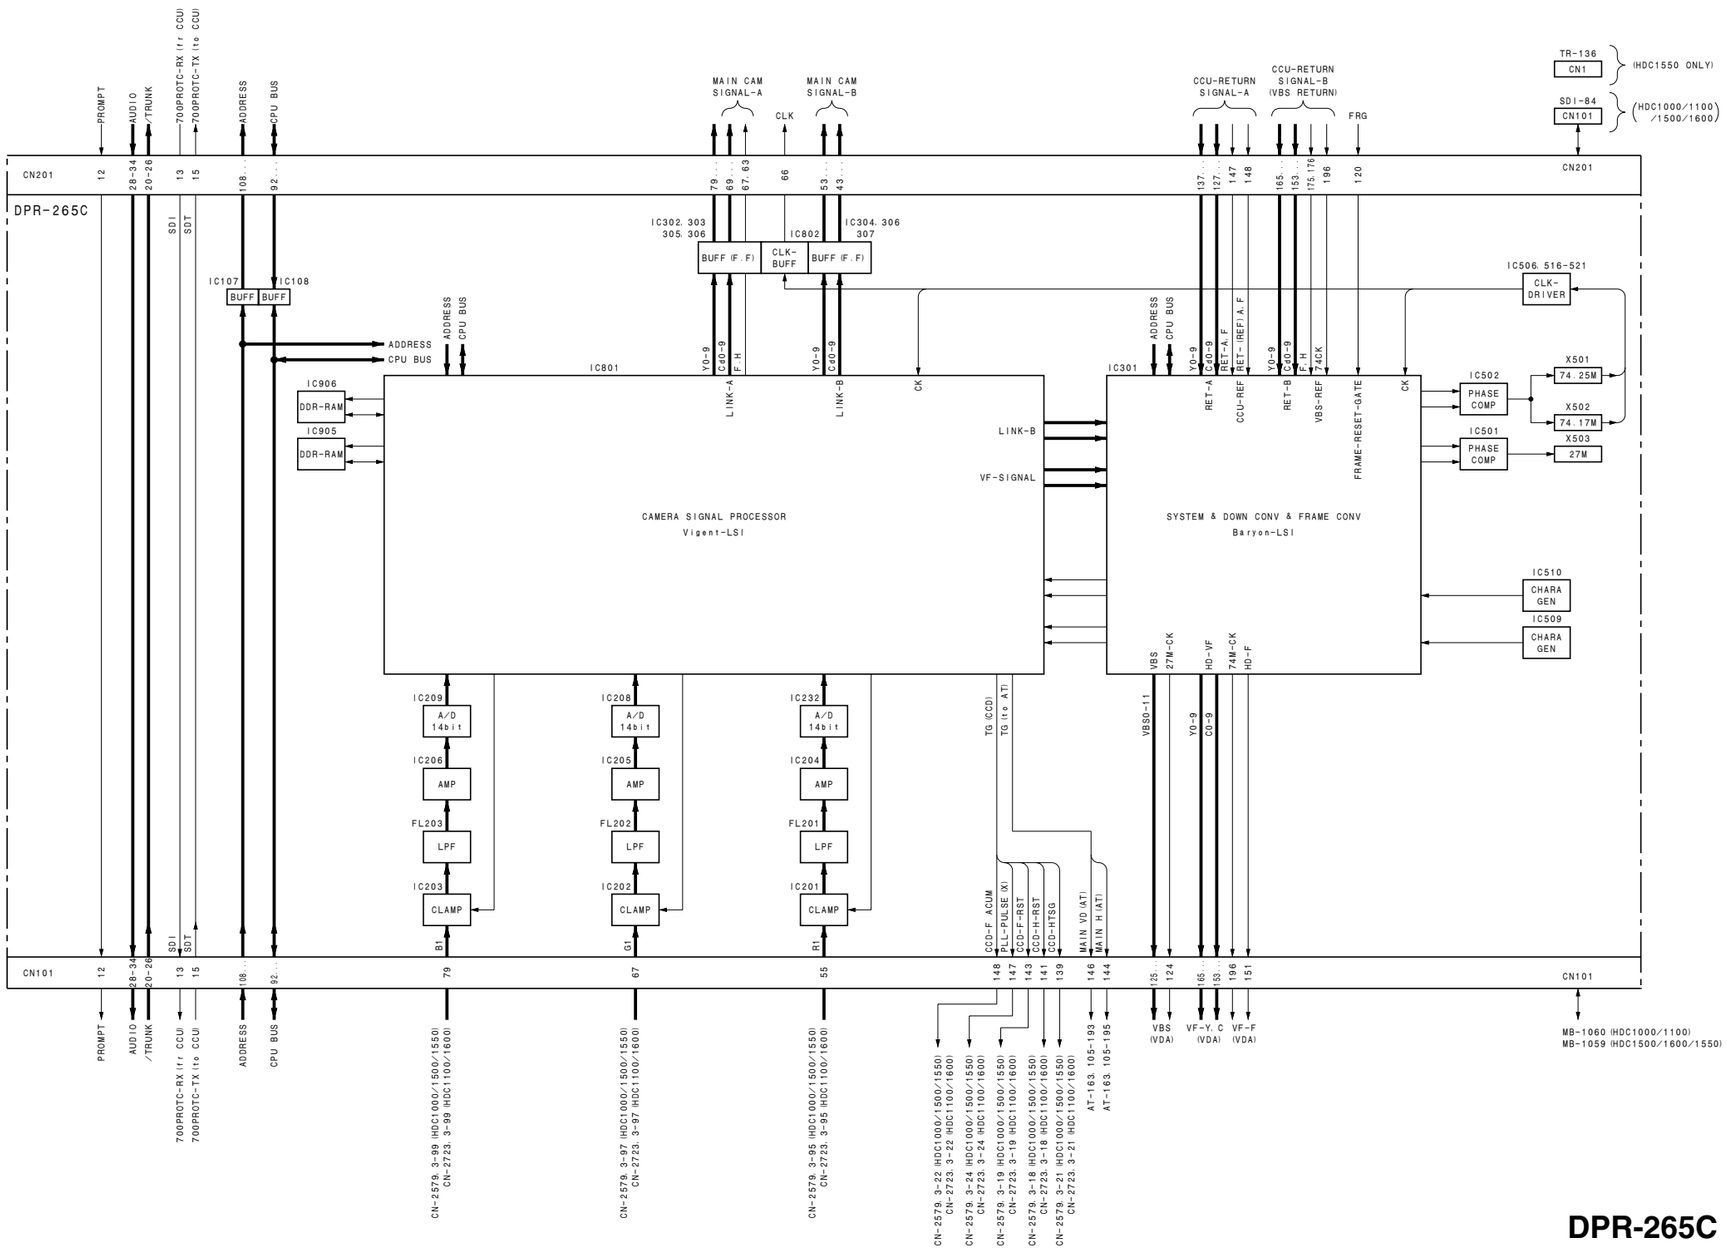
DPR-265C
CN201
PROMPT
AUDIO
/TRUNK
700PROTC-RX (fr CCU)
700PROTC-TX (to CCU)
ADDRESS
CPU BUS
SDI
SDT
MAIN CAM SIGNAL-A
MAIN CAM SIGNAL-B
CLK
CCU-RETURN SIGNAL-A
CCU-RETURN SIGNAL-B (VBS RETURN)
FRG
TR-136
CN1
(HDC1550 ONLY)
SDI-84
CN101
(HDC1000/1100 /1500/1600)
IC302. 303 305. 306
IC802
IC304. 306 307
BUFF (F.F)
CLK-BUFF
IC107
IC108
BUFF
IC506. 516-521
CLK-DRIVER
IC906
DDR-RAM
IC905
IC801
CAMERA SIGNAL PROCESSOR
Vigent-LSI
LINK-A
LINK-B
CK
IC301
SYSTEM & DOWN CONV & FRAME CONV
Baryon-LSI
RET-A
CCU-REF
RET-B
VBS-REF
FRAME-RESET-GATE
IC502
PHASE COMP
IC501
X501
74.25M
X502
74.17M
X503
27M
IC510
CHARA GEN
IC509
IC209
IC208
IC232
A/D 14bit
IC206
IC205
IC204
AMP
FL203
FL202
FL201
LPF
IC203
IC202
IC201
CLAMP
TG (CCD)
TG (to AT)
VBS0-11
HD-VF
74M-CK
HD-F
CCD-F ACCUM
PLL-PULSE (X)
CCD-F-RST
CCD-H-RST
CCD-HTSG
MAIN VD (AT)
MAIN H (AT)
CN101
MB-1060 (HDC1000/1100)
MB-1059 (HDC1500/1600/1550)
VBS (VDA)
VF-Y, C (VDA)
VF-F (VDA)
CN-2579. 3-99 (HDC1000/1500/1550)
CN-2723. 3-99 (HDC1100/1600)
CN-2579. 3-97 (HDC1000/1500/1550)
CN-2723. 3-97 (HDC1100/1600)
CN-2579. 3-95 (HDC1000/1500/1550)
CN-2723. 3-95 (HDC1100/1600)
CN-2579. 3-22 (HDC1000/1500/1550)
CN-2723. 3-22 (HDC1100/1600)
CN-2579. 3-24 (HDC1000/1500/1550)
CN-2723. 3-24 (HDC1100/1600)
CN-2579. 3-19 (HDC1000/1500/1550)
CN-2723. 3-19 (HDC1100/1600)
CN-2579. 3-18 (HDC1000/1500/1550)
CN-2723. 3-18 (HDC1100/1600)
CN-2579. 3-21 (HDC1000/1500/1550)
CN-2723. 3-21 (HDC1100/1600)
AT-163. 105-193
AT-163. 105-195


DPR-265C

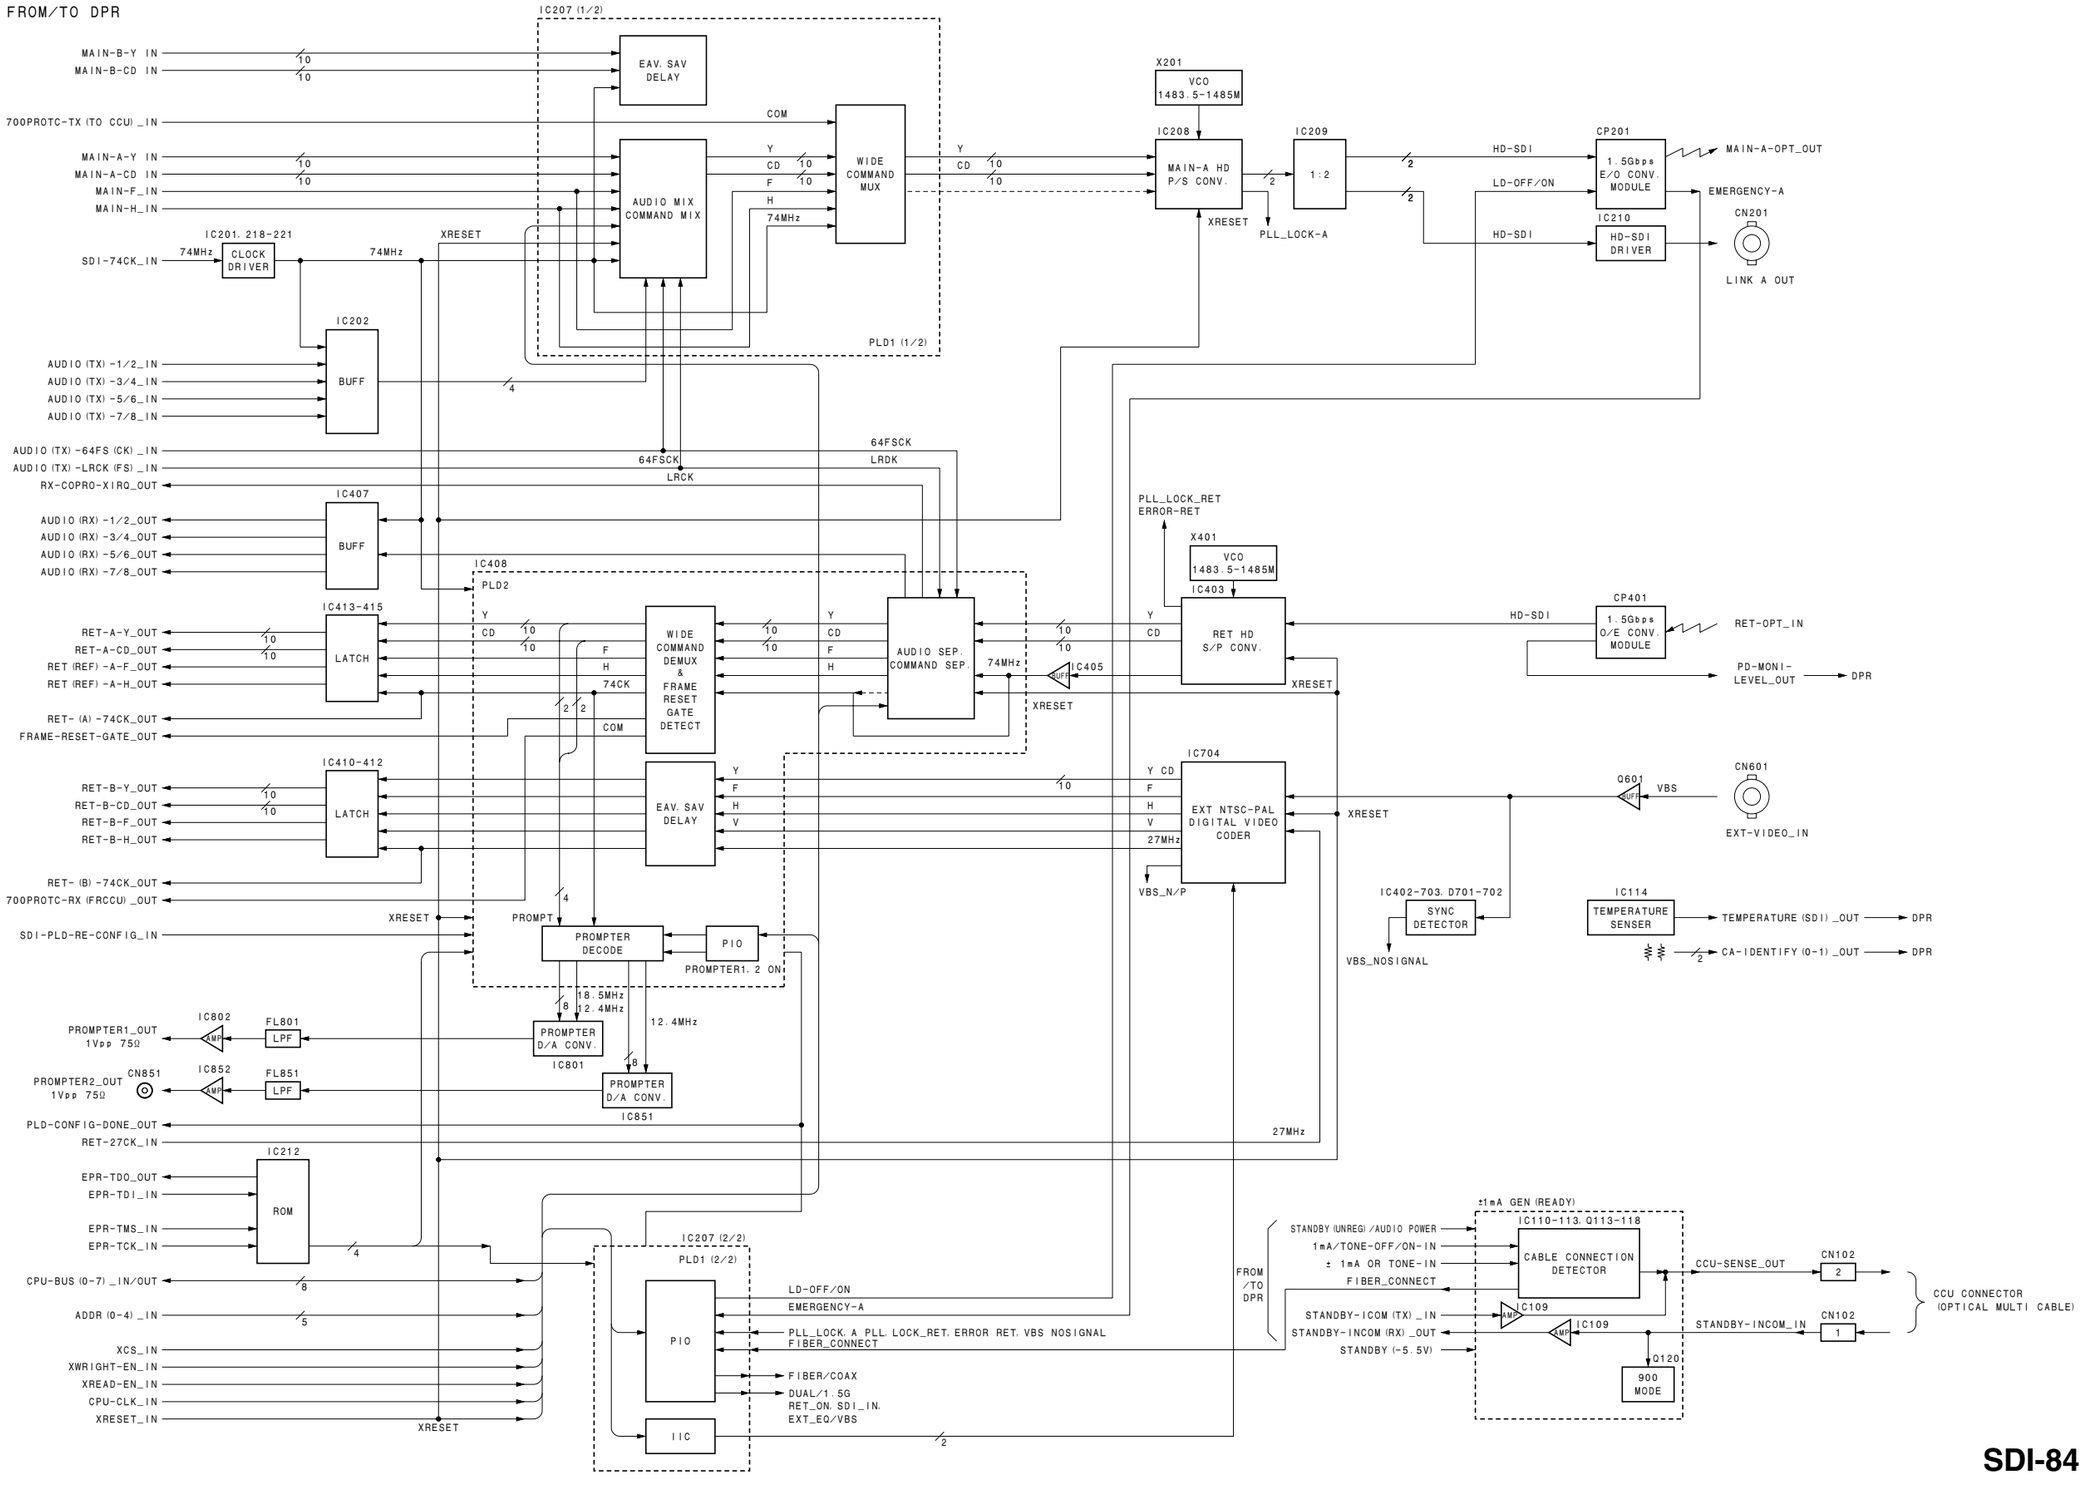
FROM/TO DPR
IC207 (1/2)
MAIN-B-Y IN
MAIN-B-CD IN
EAV. SAV DELAY
700PROTC-TX (TO CCU) _IN
COM
MAIN-A-Y IN
MAIN-A-CD IN
MAIN-F_IN
MAIN-H_IN
AUDIO MIX COMMAND MIX
WIDE COMMAND MUX
IC201. 218-221
74MHz
CLOCK DRIVER
SDI-74CK_IN
XRESET
IC202
BUFF
AUDIO (TX) -1/2_IN
AUDIO (TX) -3/4_IN
AUDIO (TX) -5/6_IN
AUDIO (TX) -7/8_IN
PLD1 (1/2)
X201
VCO 1483.5-1485M
IC208
MAIN-A HD P/S CONV.
IC209
1:2
PLL_LOCK-A
HD-SDI
LD-OFF/ON
CP201
1.5Gbps E/O CONV. MODULE
MAIN-A-OPT_OUT
EMERGENCY-A
IC210
HD-SDI DRIVER
CN201
LINK A OUT
AUDIO (TX) -64FS (CK) _IN
AUDIO (TX) -LRCK (FS) _IN
RX-COPRO-XIRQ_OUT
64FSCK
LRCK
LRDK
IC407
BUFF
AUDIO (RX) -1/2_OUT
AUDIO (RX) -3/4_OUT
AUDIO (RX) -5/6_OUT
AUDIO (RX) -7/8_OUT
PLL_LOCK_RET
ERROR-RET
X401
VCO 1483.5-1485M
IC403
RET HD S/P CONV.
IC408
PLD2
IC413-415
LATCH
RET-A-Y_OUT
RET-A-CD_OUT
RET (REF) -A-F_OUT
RET (REF) -A-H_OUT
WIDE COMMAND DEMUX & FRAME RESET GATE DETECT
AUDIO SEP. COMMAND SEP.
74MHz
IC405
BUFF
74CK
COM
RET- (A) -74CK_OUT
FRAME-RESET-GATE_OUT
CP401
1.5Gbps O/E CONV. MODULE
RET-OPT_IN
PD-MONI-LEVEL_OUT
DPR
IC410-412
LATCH
RET-B-Y_OUT
RET-B-CD_OUT
RET-B-F_OUT
RET-B-H_OUT
EAV. SAV DELAY
RET- (B) -74CK_OUT
700PROTC-RX (FRCCU) _OUT
IC704
EXT NTSC-PAL DIGITAL VIDEO CODER
Y CD
F
H
V
27MHz
VBS_N/P
XRESET
Q601
BUFF
VBS
CN601
EXT-VIDEO_IN
IC402-703. D701-702
SYNC DETECTOR
VBS_NOSIGNAL
IC114
TEMPERATURE SENSER
TEMPERATURE (SDI) _OUT
CA-IDENTIFY (0-1) _OUT
PROMPT
PROMPTER DECODE
PIO
PROMPTER1. 2 ON
SDI-PLD-RE-CONFIG_IN
18.5MHz
12.4MHz
PROMPTER D/A CONV.
IC801
IC802
AMP
FL801
LPF
PROMPTER1_OUT 1Vpp 75Ω
CN851
PROMPTER2_OUT 1Vpp 75Ω
IC852
FL851
IC851
PLD-CONFIG-DONE_OUT
RET-27CK_IN
IC212
ROM
EPR-TDO_OUT
EPR-TDI_IN
EPR-TMS_IN
EPR-TCK_IN
CPU-BUS (0-7) _IN/OUT
ADDR (0-4) _IN
XCS_IN
XWRIGHT-EN_IN
XREAD-EN_IN
CPU-CLK_IN
XRESET_IN
IC207 (2/2)
PLD1 (2/2)
PIO
IIC
LD-OFF/ON
EMERGENCY-A
PLL_LOCK. A PLL_LOCK_RET. ERROR RET. VBS NOSIGNAL
FIBER_CONNECT
FIBER/COAX
DUAL/1.5G
RET_ON. SDI_IN.
EXT_EQ/VBS
±1mA GEN (READY)
IC110-113. Q113-118
CABLE CONNECTION DETECTOR
FROM /TO DPR
STANDBY (UNREG) /AUDIO POWER
1mA/TONE-OFF/ON-IN
± 1mA OR TONE-IN
FIBER_CONNECT
STANDBY-ICOM (TX) _IN
STANDBY-INCOM (RX) _OUT
STANDBY (-5.5V)
IC109
CCU-SENSE_OUT
CN102
2
STANDBY-INCOM_IN
1
CCU CONNECTOR (OPTICAL MULTI CABLE)
Q120
900 MODE


SDI-84

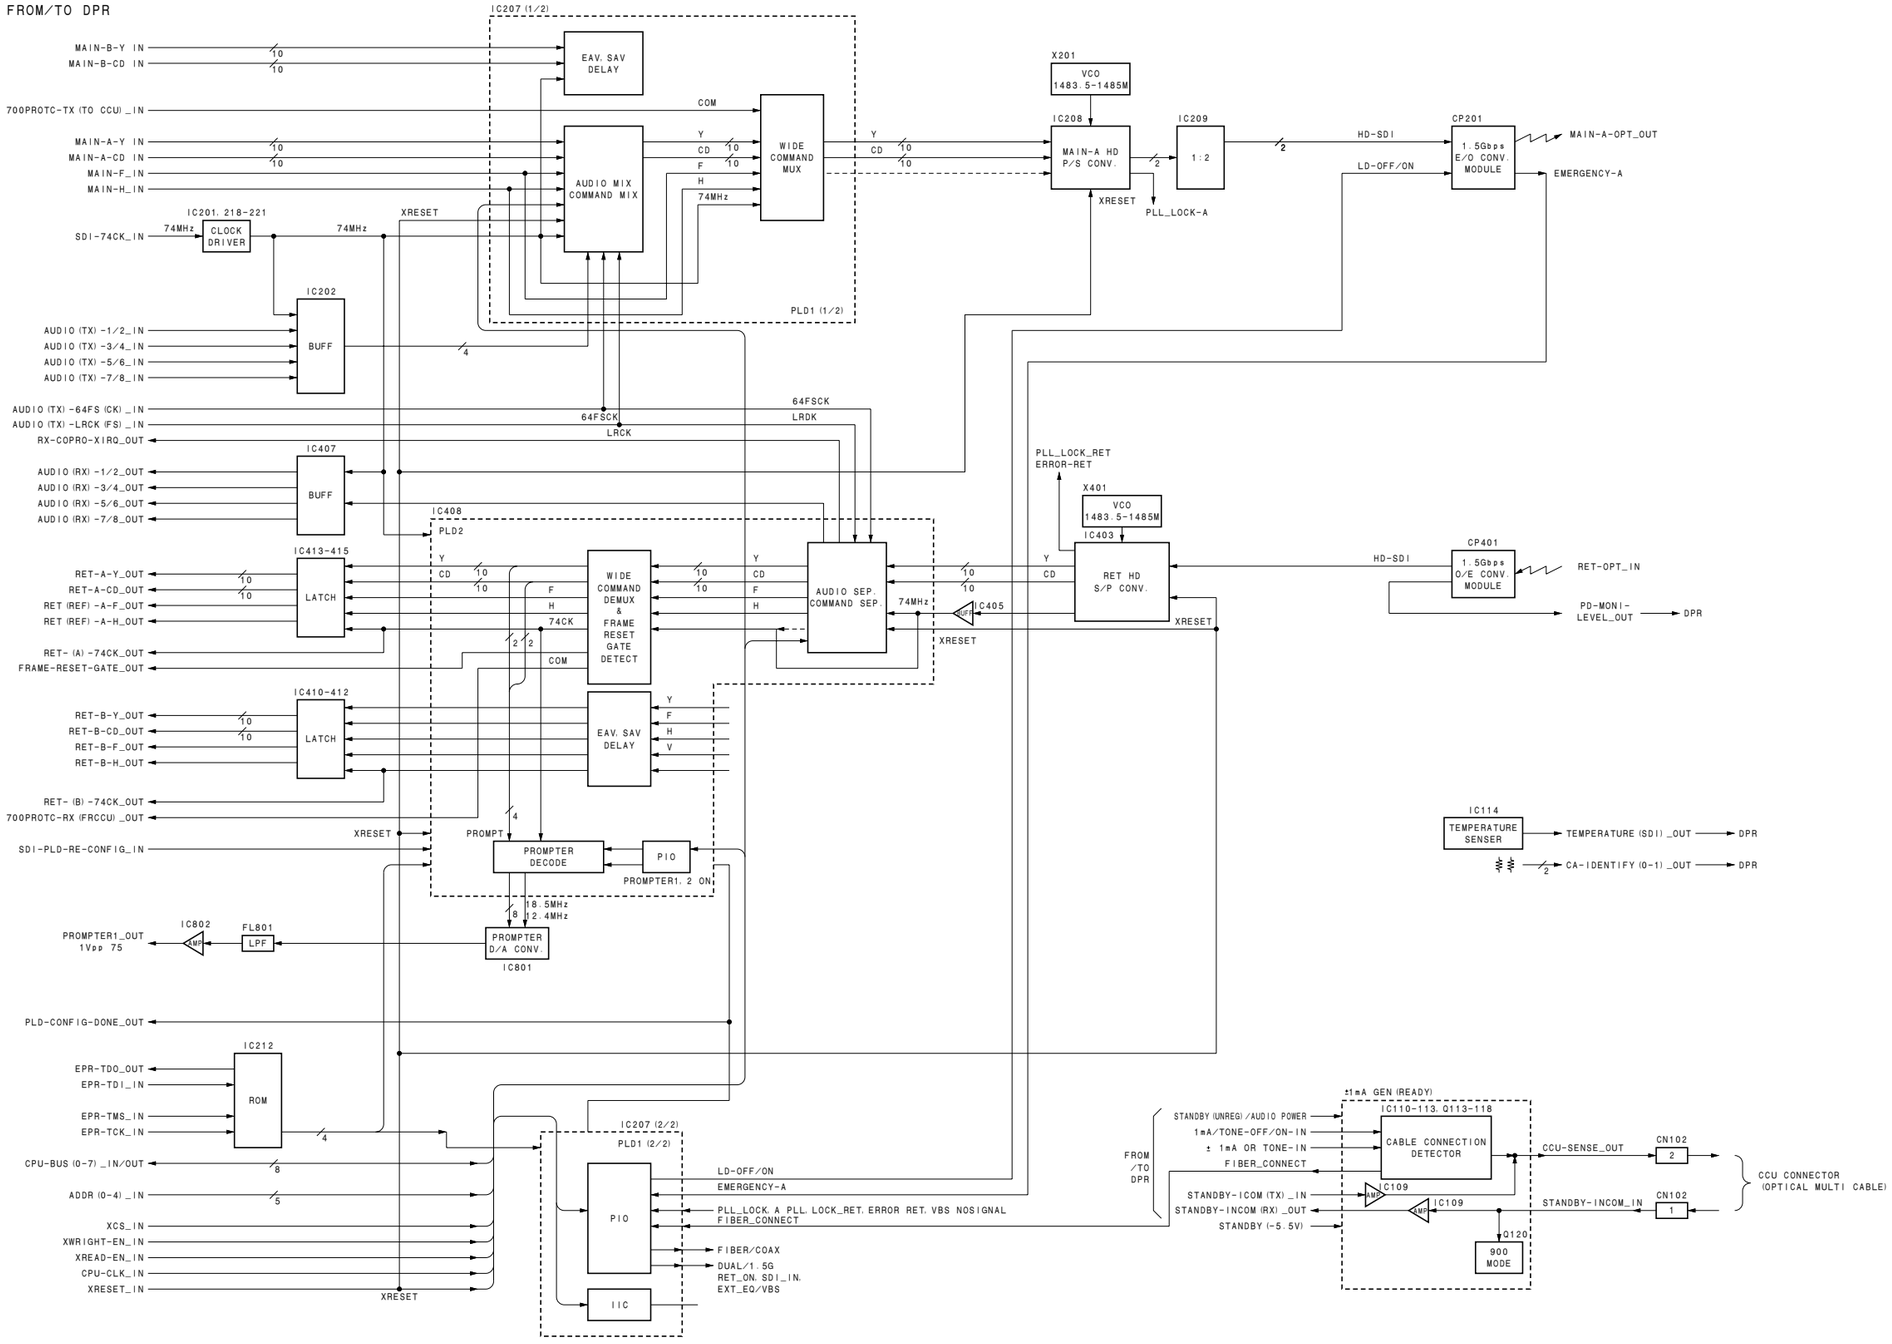
FROM/TO DPR
IC207 (1/2)
EAV. SAV DELAY
AUDIO MIX COMMAND MIX
WIDE COMMAND MUX
PLD1 (1/2)
MAIN-B-Y IN
MAIN-B-CD IN
700PROTC-TX (TO CCU) _IN
MAIN-A-Y IN
MAIN-A-CD IN
MAIN-F_IN
MAIN-H_IN
SDI-74CK_IN
IC201, 218-221
CLOCK DRIVER
74MHz
XRESET
IC202
BUFF
AUDIO (TX) -1/2_IN
AUDIO (TX) -3/4_IN
AUDIO (TX) -5/6_IN
AUDIO (TX) -7/8_IN
AUDIO (TX) -64FS (CK) _IN
AUDIO (TX) -LRCK (FS) _IN
RX-COPRO-XIRQ_OUT
64FSCK
LRCK
LRDK
IC407
BUFF
AUDIO (RX) -1/2_OUT
AUDIO (RX) -3/4_OUT
AUDIO (RX) -5/6_OUT
AUDIO (RX) -7/8_OUT
IC408
PLD2
IC413-415
LATCH
RET-A-Y_OUT
RET-A-CD_OUT
RET (REF) -A-F_OUT
RET (REF) -A-H_OUT
RET- (A) -74CK_OUT
FRAME-RESET-GATE_OUT
WIDE COMMAND DEMUX & FRAME RESET GATE DETECT
AUDIO SEP. COMMAND SEP.
74CK
COM
IC410-412
LATCH
RET-B-Y_OUT
RET-B-CD_OUT
RET-B-F_OUT
RET-B-H_OUT
RET- (B) -74CK_OUT
700PROTC-RX (FRCCU) _OUT
EAV. SAV DELAY
SDI-PLD-RE-CONFIG_IN
PROMPT
PROMPTER DECODE
PIO
PROMPTER1, 2 ON
18.5MHz
12.4MHz
IC802
AMP
FL801
LPF
PROMPTER1_OUT
1Vpp 75
PROMPTER D/A CONV.
IC801
PLD-CONFIG-DONE_OUT
IC212
ROM
EPR-TDO_OUT
EPR-TDI_IN
EPR-TMS_IN
EPR-TCK_IN
CPU-BUS (0-7) _IN/OUT
ADDR (0-4) _IN
XCS_IN
XWRIGHT-EN_IN
XREAD-EN_IN
CPU-CLK_IN
XRESET_IN
IC207 (2/2)
PLD1 (2/2)
PIO
IIC
LD-OFF/ON
EMERGENCY-A
PLL_LOCK, A PLL, LOCK_RET, ERROR RET, VBS NOSIGNAL
FIBER_CONNECT
FIBER/COAX
DUAL/1.5G
RET_ON, SDI_IN,
EXT_EQ/VBS
X201
VCO
1483.5-1485M
IC208
MAIN-A HD P/S CONV.
IC209
1:2
HD-SDI
LD-OFF/ON
PLL_LOCK-A
CP201
1.5Gbps E/O CONV. MODULE
MAIN-A-OPT_OUT
EMERGENCY-A
PLL_LOCK_RET
ERROR-RET
X401
VCO
1483.5-1485M
IC403
RET HD S/P CONV.
CP401
1.5Gbps O/E CONV. MODULE
RET-OPT_IN
PD-MONI-LEVEL_OUT
DPR
IC405
IC114
TEMPERATURE SENSER
TEMPERATURE (SDI) _OUT
CA-IDENTIFY (0-1) _OUT
±1mA GEN (READY)
IC110-113, Q113-118
CABLE CONNECTION DETECTOR
STANDBY (UNREG) /AUDIO POWER
1mA/TONE-OFF/ON-IN
± 1mA OR TONE-IN
FIBER_CONNECT
STANDBY-ICOM (TX) _IN
STANDBY-INCOM (RX) _OUT
STANDBY (-5.5V)
FROM /TO DPR
IC109
CCU-SENSE_OUT
STANDBY-INCOM_IN
CN102
CCU CONNECTOR (OPTICAL MULTI CABLE)
Q120
900 MODE


SDI-84C

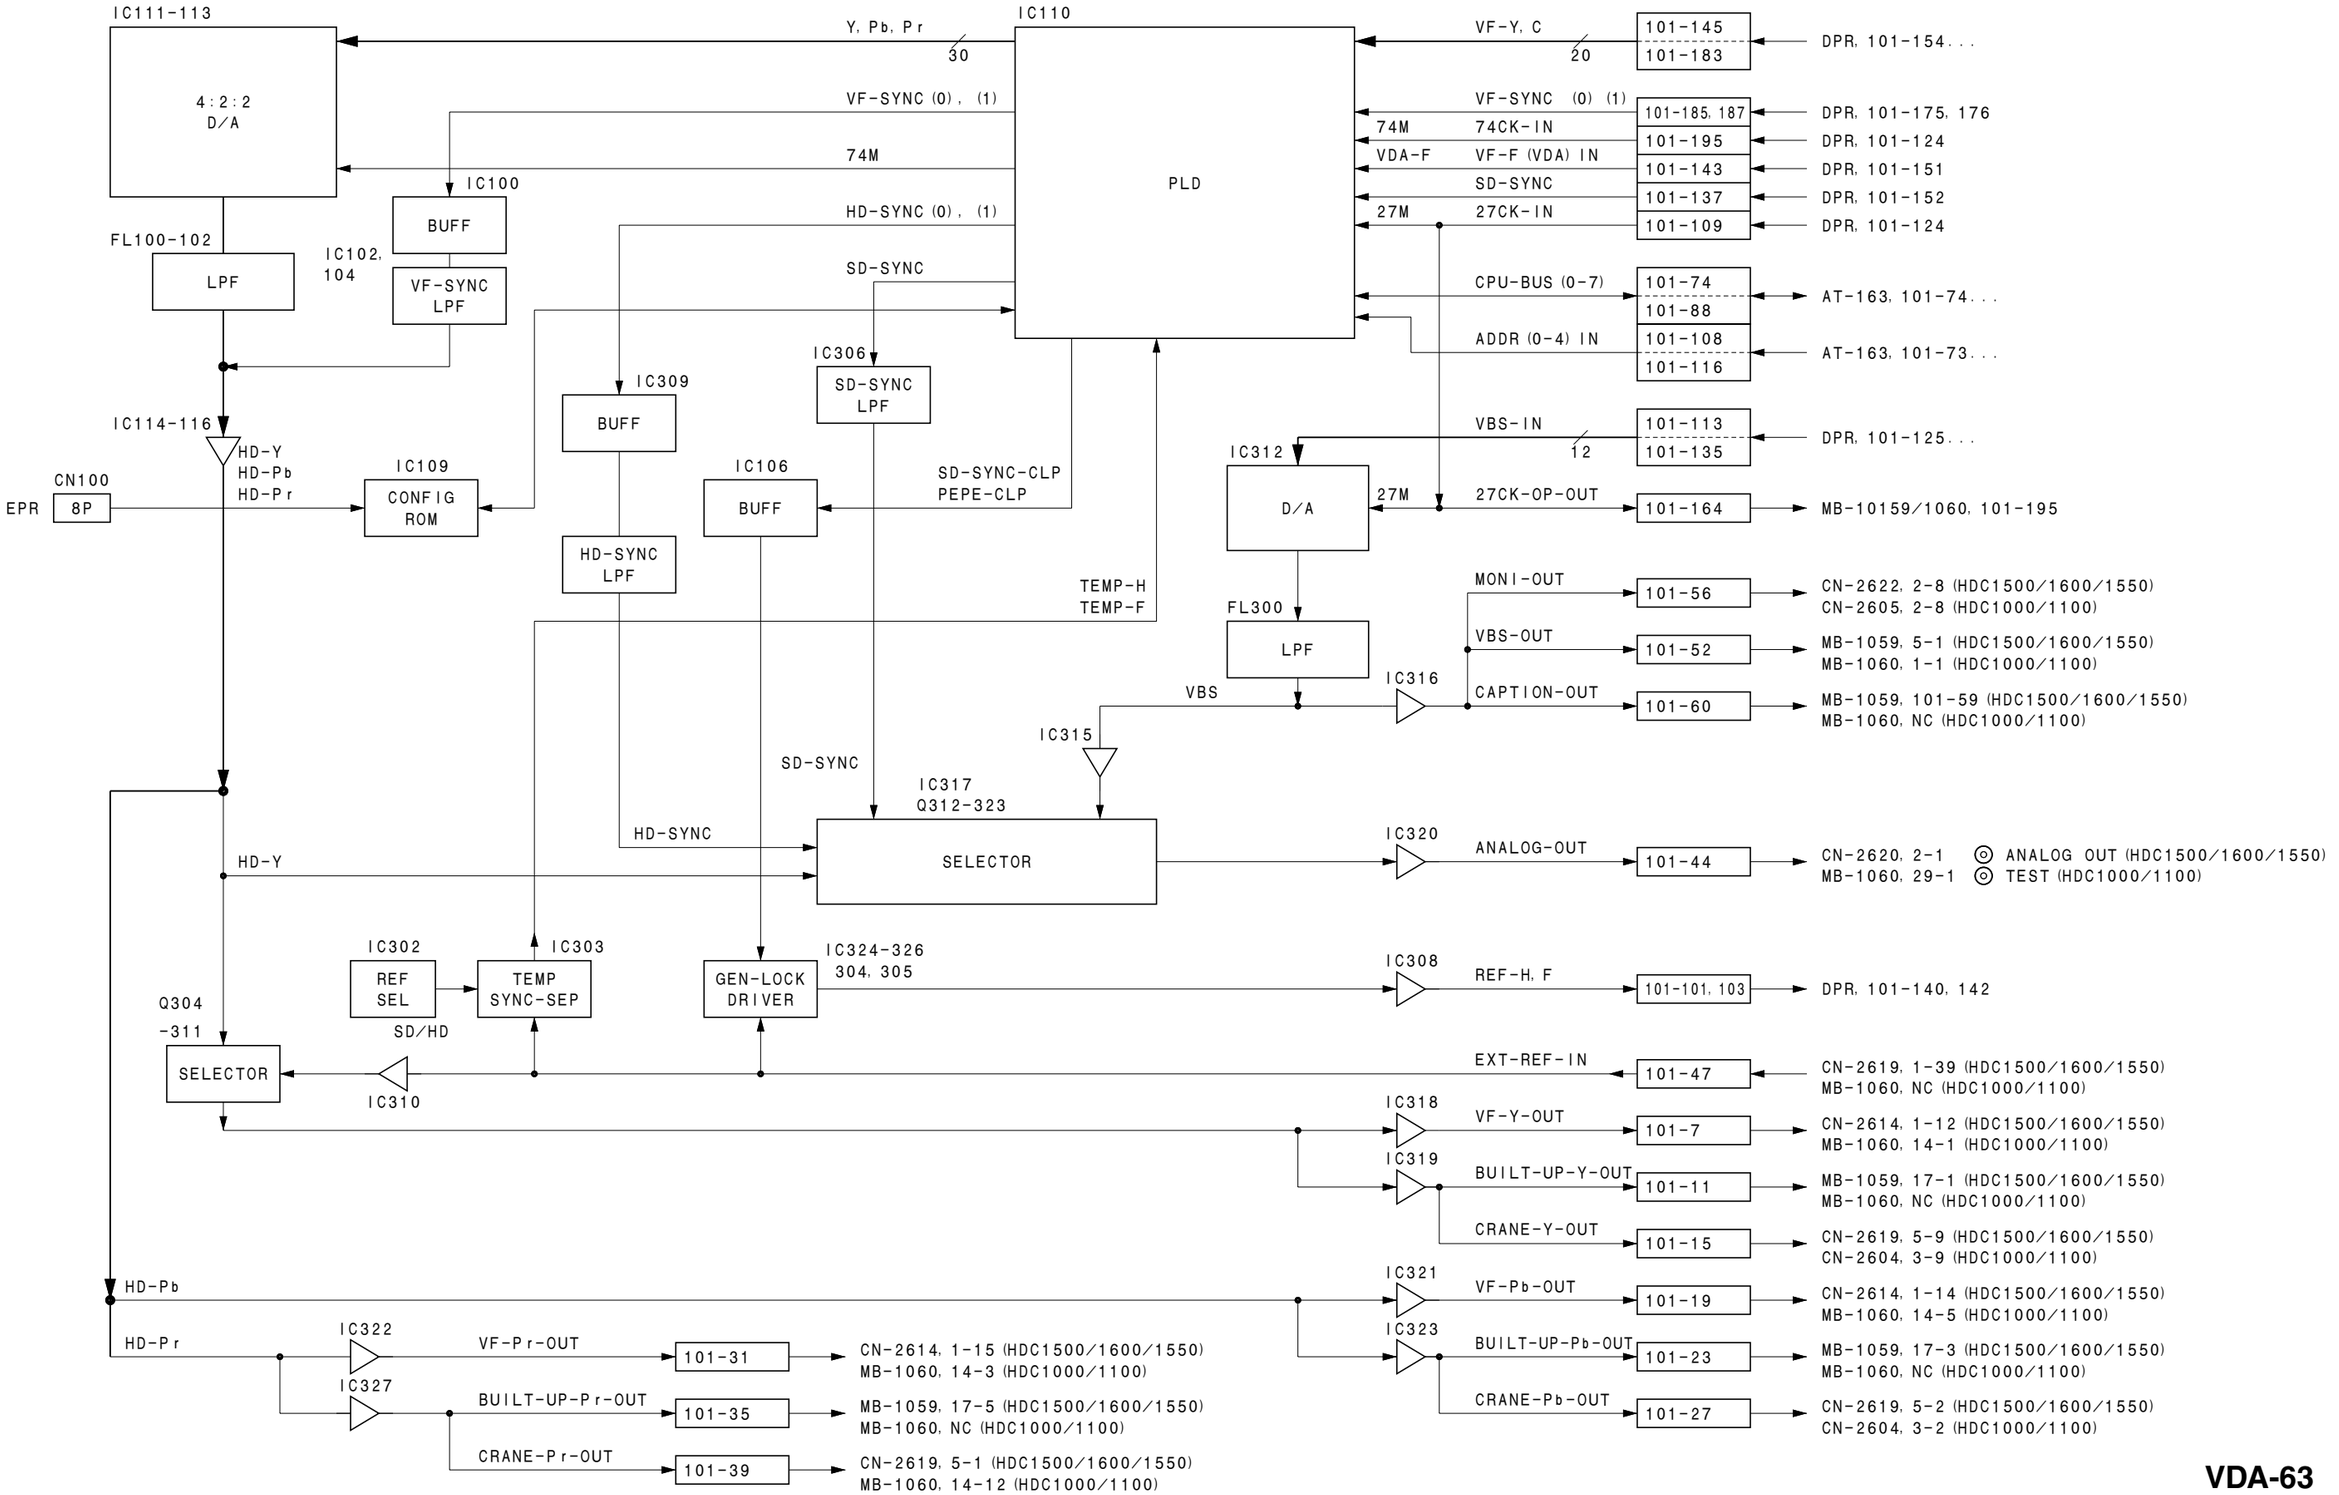
IC111-113
4:2:2 D/A
Y, Pb, Pr
30
IC110
PLD
VF-Y, C
20
101-145
101-183
DPR, 101-154...
VF-SYNC (0), (1)
74M
HD-SYNC (0), (1)
SD-SYNC
VF-SYNC (0) (1)
74M
74CK-IN
VDA-F
VF-F (VDA) IN
SD-SYNC
27M
27CK-IN
101-185, 187
101-195
101-143
101-137
101-109
DPR, 101-175, 176
DPR, 101-124
DPR, 101-151
DPR, 101-152
DPR, 101-124
IC100
BUFF
IC102, 104
VF-SYNC LPF
FL100-102
LPF
CPU-BUS (0-7)
ADDR (0-4) IN
101-74
101-88
101-108
101-116
AT-163, 101-74...
AT-163, 101-73...
IC306
SD-SYNC LPF
IC309
BUFF
IC114-116
HD-Y
HD-Pb
HD-Pr
CN100
EPR
8P
IC109
CONFIG ROM
IC106
BUFF
SD-SYNC-CLP
PEPE-CLP
VBS-IN
12
101-113
101-135
DPR, 101-125...
IC312
D/A
27M
27CK-OP-OUT
101-164
MB-10159/1060, 101-195
HD-SYNC LPF
TEMP-H
TEMP-F
FL300
LPF
MONI-OUT
VBS-OUT
CAPTION-OUT
101-56
101-52
101-60
CN-2622, 2-8 (HDC1500/1600/1550)
CN-2605, 2-8 (HDC1000/1100)
MB-1059, 5-1 (HDC1500/1600/1550)
MB-1060, 1-1 (HDC1000/1100)
MB-1059, 101-59 (HDC1500/1600/1550)
MB-1060, NC (HDC1000/1100)
VBS
IC316
IC315
SD-SYNC
IC317
Q312-323
HD-SYNC
HD-Y
SELECTOR
IC320
ANALOG-OUT
101-44
CN-2620, 2-1 ◎ ANALOG OUT (HDC1500/1600/1550)
MB-1060, 29-1 ◎ TEST (HDC1000/1100)
IC302
REF SEL
IC303
TEMP SYNC-SEP
IC324-326
304, 305
GEN-LOCK DRIVER
IC308
REF-H, F
101-101, 103
DPR, 101-140, 142
Q304
-311
SD/HD
SELECTOR
IC310
EXT-REF-IN
101-47
CN-2619, 1-39 (HDC1500/1600/1550)
MB-1060, NC (HDC1000/1100)
IC318
VF-Y-OUT
101-7
CN-2614, 1-12 (HDC1500/1600/1550)
MB-1060, 14-1 (HDC1000/1100)
IC319
BUILT-UP-Y-OUT
101-11
MB-1059, 17-1 (HDC1500/1600/1550)
MB-1060, NC (HDC1000/1100)
CRANE-Y-OUT
101-15
CN-2619, 5-9 (HDC1500/1600/1550)
CN-2604, 3-9 (HDC1000/1100)
HD-Pb
IC321
VF-Pb-OUT
101-19
CN-2614, 1-14 (HDC1500/1600/1550)
MB-1060, 14-5 (HDC1000/1100)
HD-Pr
IC322
VF-Pr-OUT
101-31
CN-2614, 1-15 (HDC1500/1600/1550)
MB-1060, 14-3 (HDC1000/1100)
IC323
BUILT-UP-Pb-OUT
101-23
MB-1059, 17-3 (HDC1500/1600/1550)
MB-1060, NC (HDC1000/1100)
IC327
BUILT-UP-Pr-OUT
101-35
MB-1059, 17-5 (HDC1500/1600/1550)
MB-1060, NC (HDC1000/1100)
CRANE-Pb-OUT
101-27
CN-2619, 5-2 (HDC1500/1600/1550)
CN-2604, 3-2 (HDC1000/1100)
CRANE-Pr-OUT
101-39
CN-2619, 5-1 (HDC1500/1600/1550)
MB-1060, 14-12 (HDC1000/1100)


TG-243 (HDC1000/1500/1550)
TG-247 (HDC1100/1600)

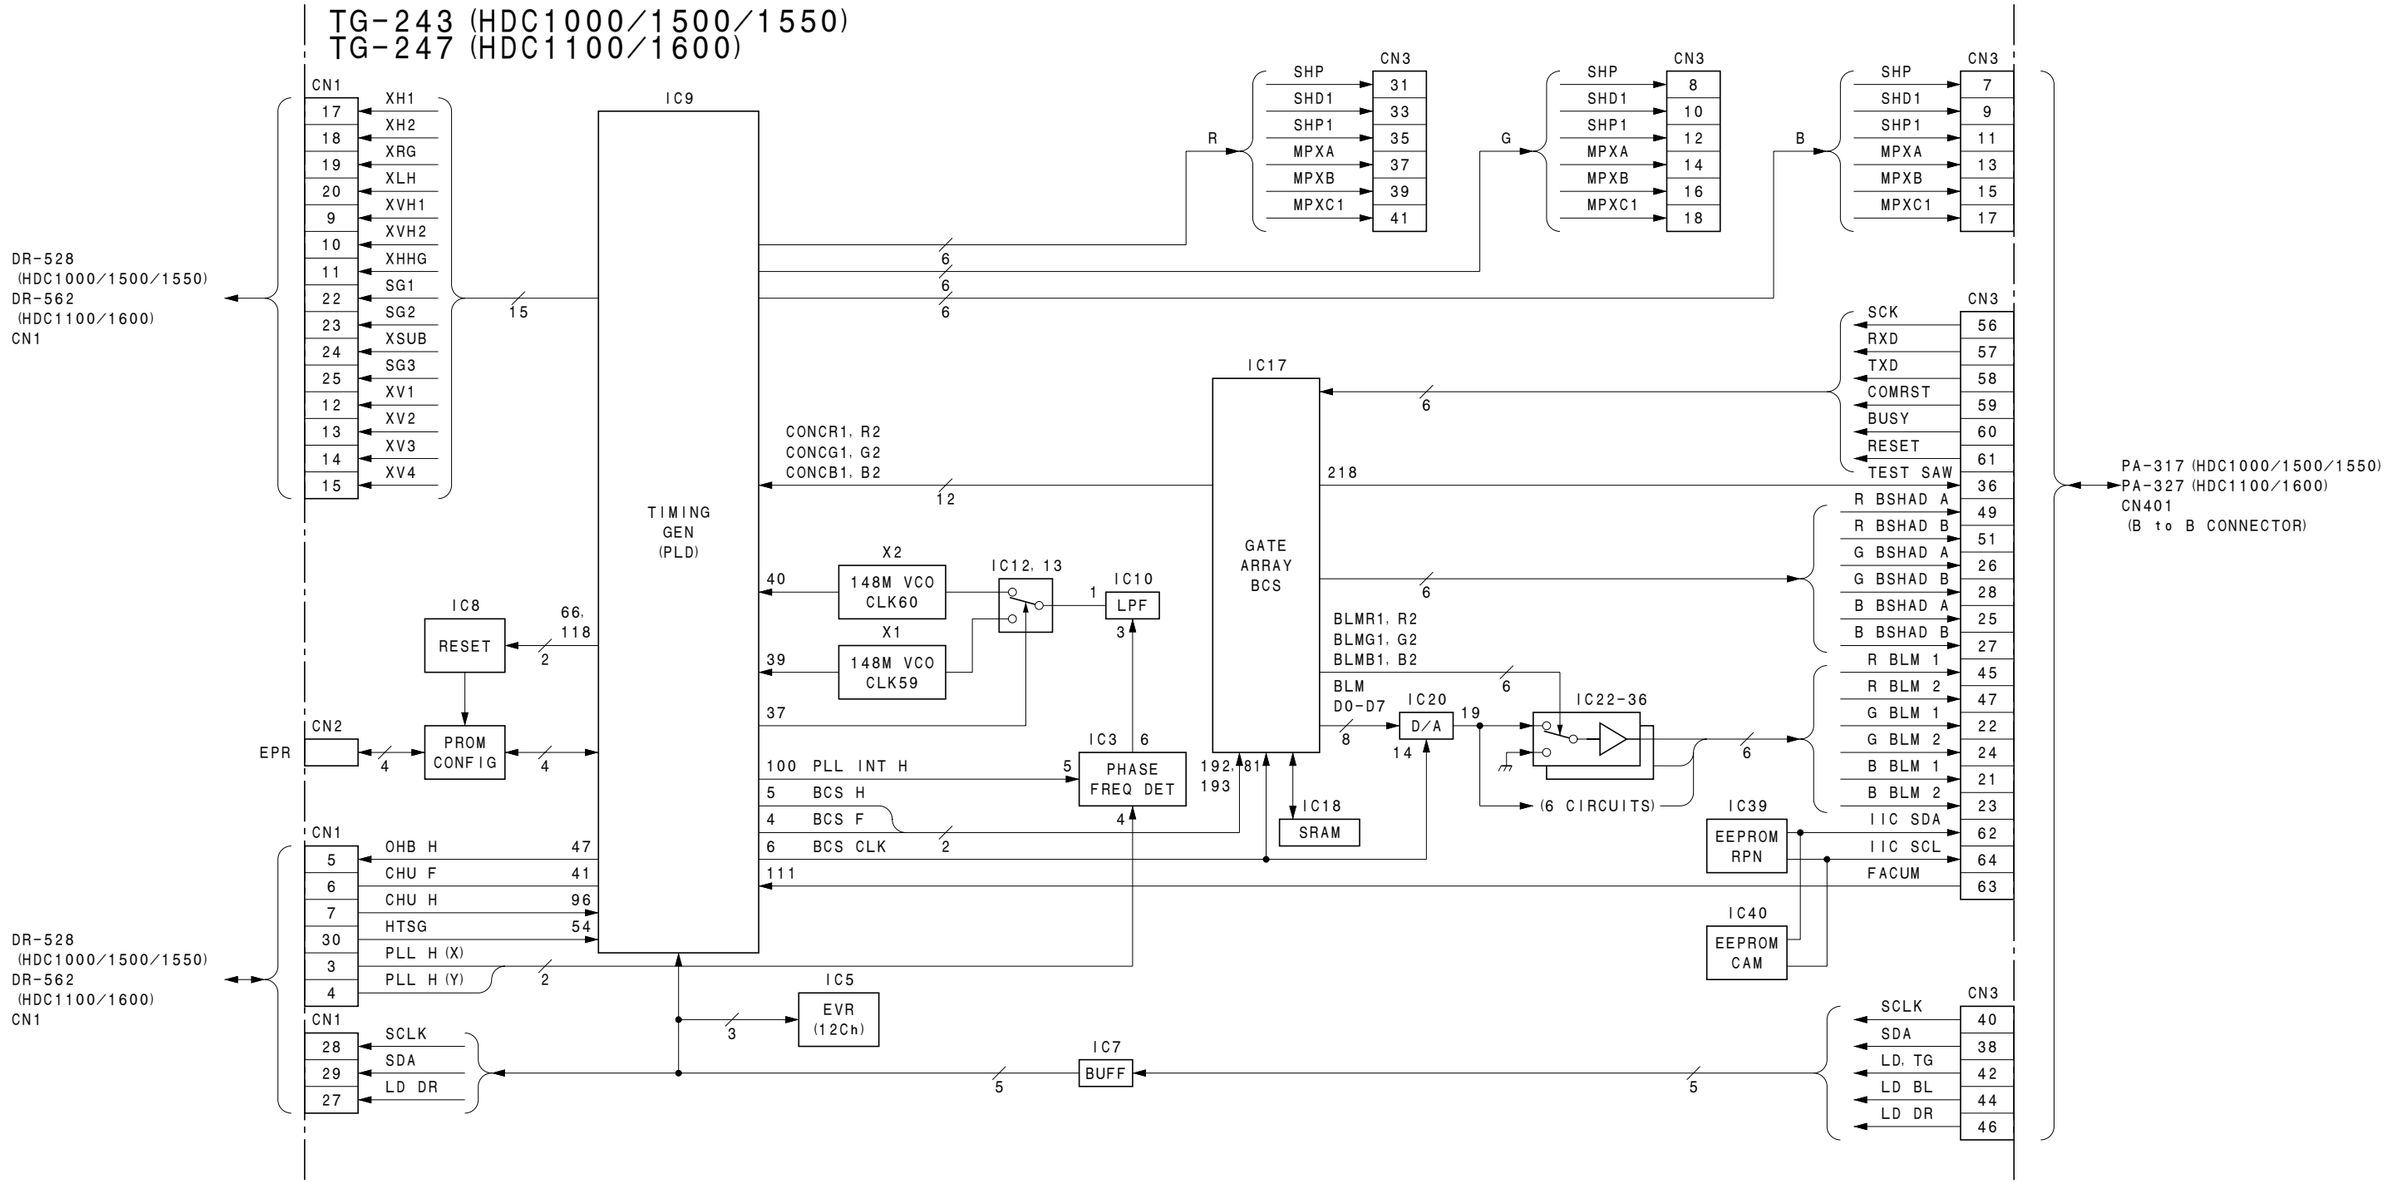

TG-243/247

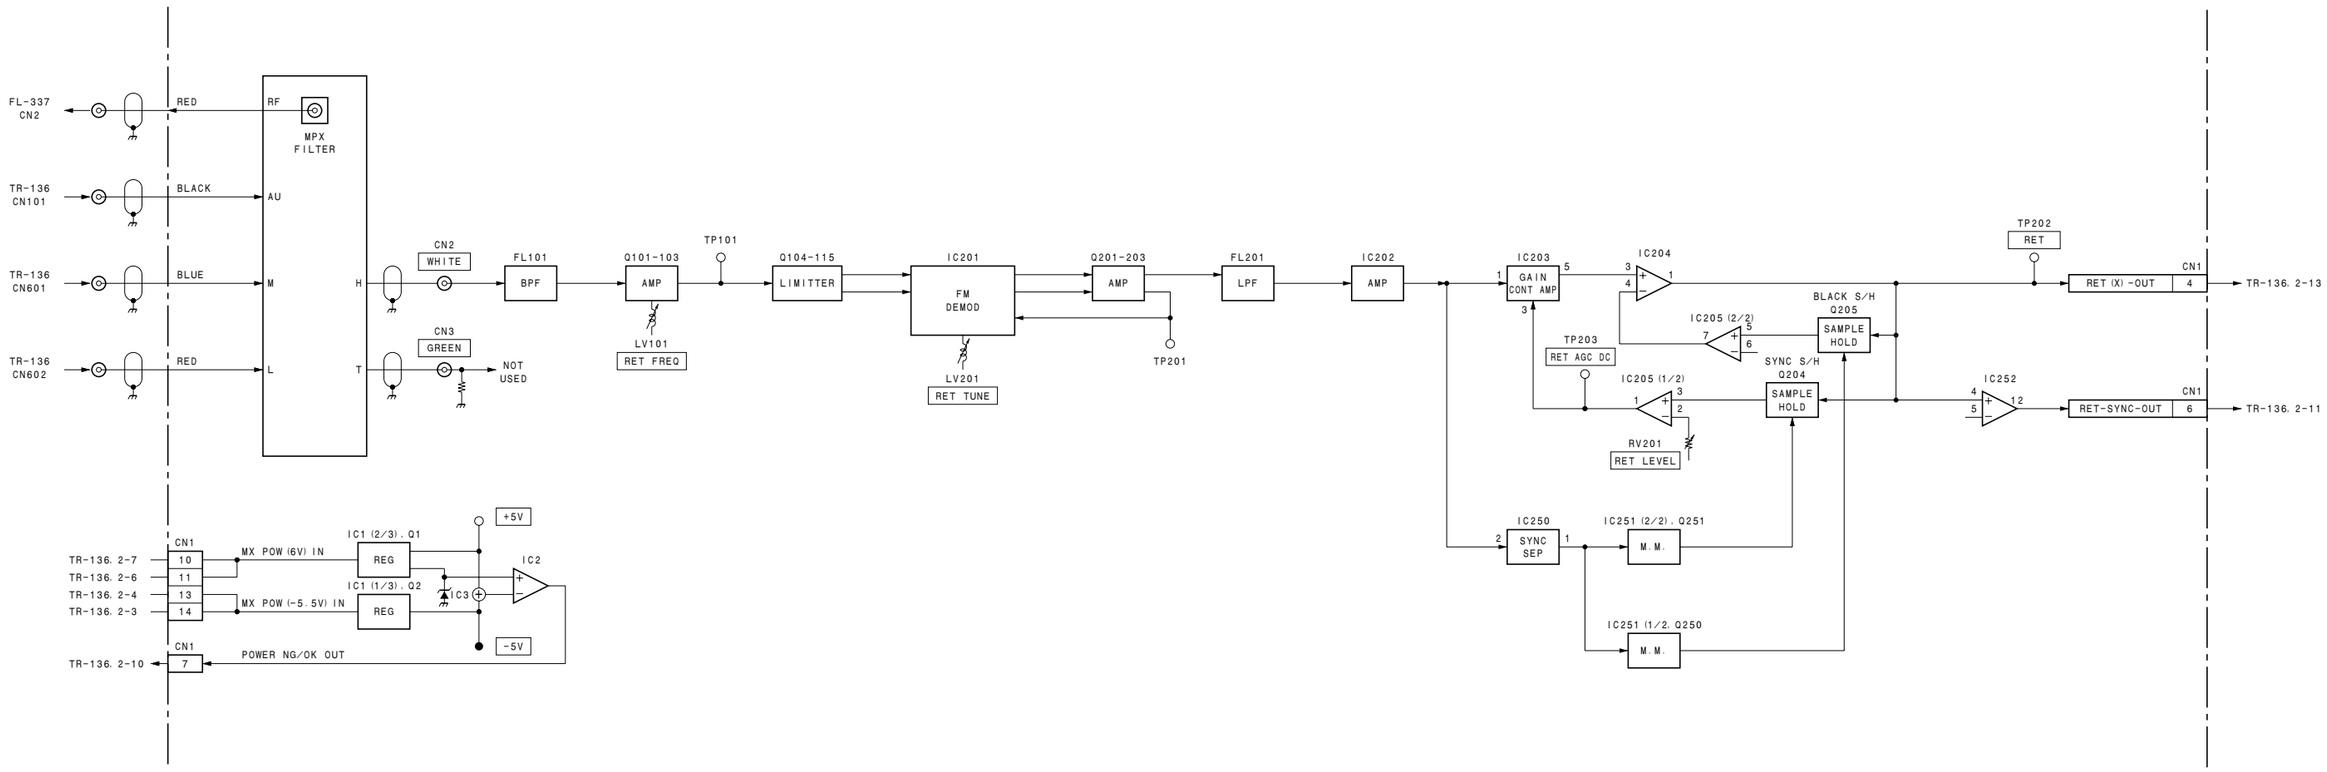
FL-337 CN2
RED
RF
MPX FILTER
TR-136 CN101
BLACK
AU
TR-136 CN601
BLUE
M
H
CN2
WHITE
FL101
BPF
Q101-103
AMP
TP101
Q104-115
LIMITTER
IC201
FM DEMOD
Q201-203
AMP
TP201
FL201
LPF
IC202
AMP
TR-136 CN602
RED
L
T
CN3
GREEN
NOT USED
LV101
RET FREQ
LV201
RET TUNE
IC203
GAIN CONT AMP
IC204
TP202
RET
CN1
RET (X) -OUT
4
TR-136. 2-13
BLACK S/H
Q205
SAMPLE HOLD
IC205 (2/2)
TP203
RET AGC DC
SYNC S/H
Q204
SAMPLE HOLD
IC205 (1/2)
IC252
CN1
RET-SYNC-OUT
6
TR-136. 2-11
RV201
RET LEVEL
IC250
SYNC SEP
IC251 (2/2), Q251
M.M.
IC251 (1/2, Q250
M.M.
+5V
IC1 (2/3), Q1
REG
IC2
IC1 (1/3), Q2
REG
IC3
-5V
CN1
10
11
13
14
TR-136. 2-7
TR-136. 2-6
TR-136. 2-4
TR-136. 2-3
MX POW (6V) IN
MX POW (-5. 5V) IN
CN1
7
TR-136. 2-10
POWER NG/OK OUT

MX-109

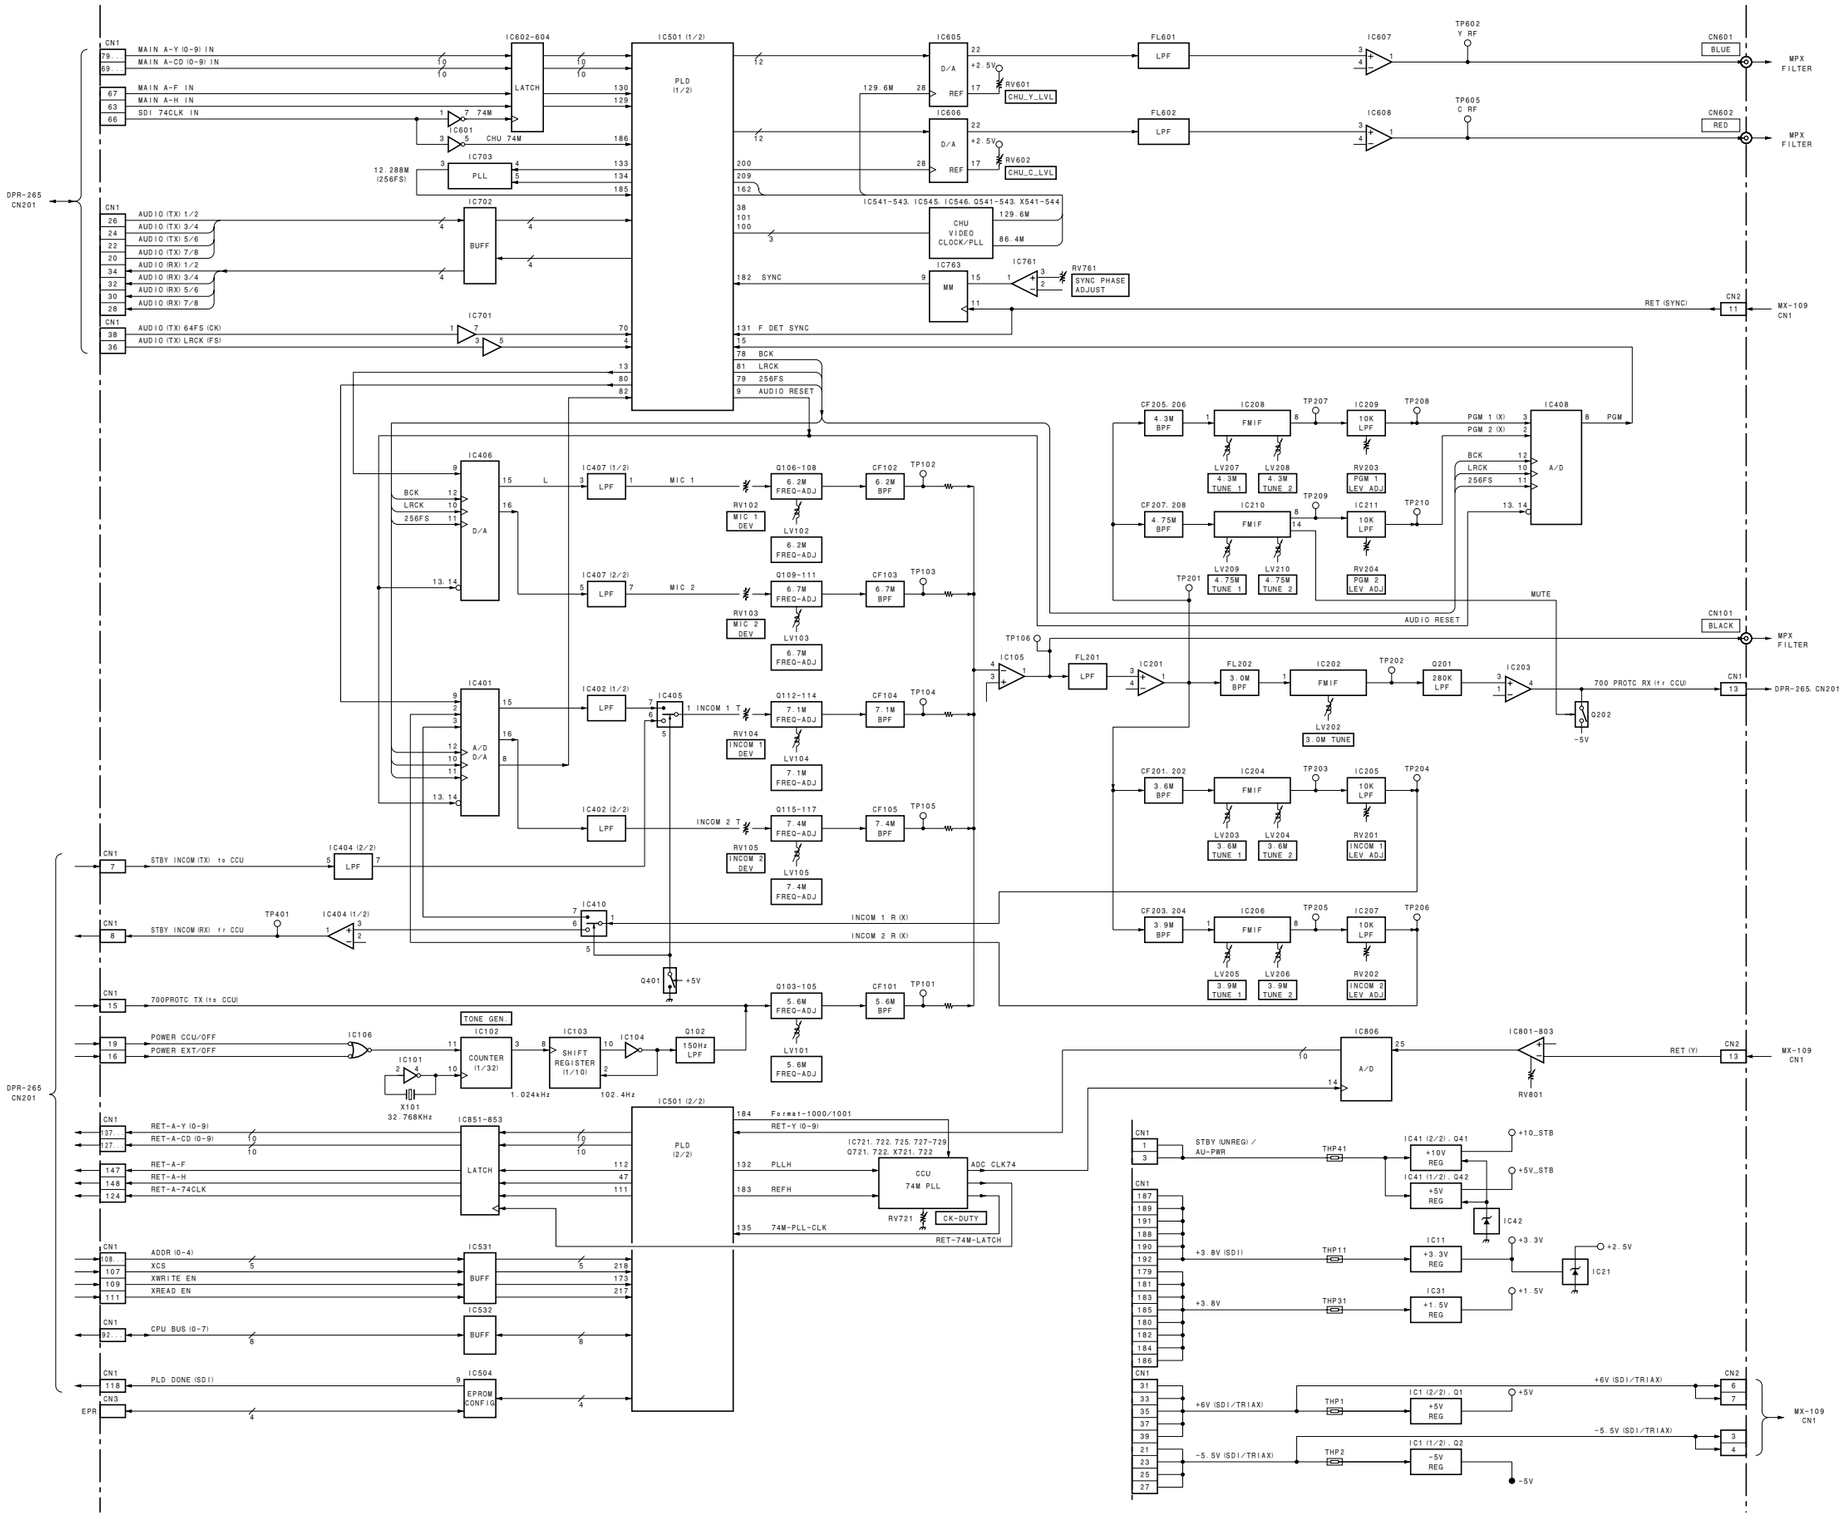
DPR-265 CN201
CN1
MAIN A-Y (0-9) IN
MAIN A-CD (0-9) IN
MAIN A-F IN
MAIN A-H IN
SDI 74CLK IN
IC602-604
LATCH
IC601
7.74M
CHU 74M
IC703
PLL
12.288M (256FS)
IC702
BUFF
AUDIO (TX) 1/2
AUDIO (TX) 3/4
AUDIO (TX) 5/6
AUDIO (TX) 7/8
AUDIO (RX) 1/2
AUDIO (RX) 3/4
AUDIO (RX) 5/6
AUDIO (RX) 7/8
IC701
AUDIO (TX) 64FS (CK)
AUDIO (TX) LRCK (FS)
IC501 (1/2)
PLD (1/2)
SYNC
F.DET SYNC
BCK
LRCK
256FS
AUDIO RESET
IC605
IC606
D/A
+2.5V
REF
RV601
CHU_Y_LVL
RV602
CHU_C_LVL
129.6M
IC541-543. IC545. IC546. Q541-543. X541-544
CHU VIDEO CLOCK/PLL
86.4M
IC763
MM
IC761
RV761
SYNC PHASE ADJUST
FL601
FL602
LPF
IC607
IC608
TP602 Y RF
TP605 C RF
CN601
BLUE
CN602
RED
MPX FILTER
RET (SYNC)
CN2
MX-109 CN1
IC406
D/A
IC407 (1/2)
IC407 (2/2)
LPF
MIC 1
MIC 2
Q106-108
Q109-111
6.2M FREQ-ADJ
6.7M FREQ-ADJ
RV102
MIC 1 DEV
RV103
MIC 2 DEV
LV102
LV103
CF102
CF103
6.2M BPF
6.7M BPF
TP102
TP103
IC401
A/D D/A
IC402 (1/2)
IC402 (2/2)
IC405
INCOM 1 T
INCOM 2 T
Q112-114
Q115-117
7.1M FREQ-ADJ
7.4M FREQ-ADJ
RV104
INCOM 1 DEV
RV105
INCOM 2 DEV
LV104
LV105
CF104
CF105
7.1M BPF
7.4M BPF
TP104
TP105
IC105
TP106
FL201
IC201
IC202
FL202
3.0M BPF
FMIF
LV202
3.0M TUNE
TP202
Q201
280K LPF
IC203
700 PROTC RX (fr CCU)
Q202
-5V
CF205. 206
4.3M BPF
IC208
IC209
10K LPF
TP207
TP208
PGM 1 (X)
PGM 2 (X)
IC408
A/D
PGM
LV207
4.3M TUNE 1
LV208
4.3M TUNE 2
RV203
PGM 1 LEV ADJ
CF207. 208
4.75M BPF
IC210
IC211
TP209
TP210
TP201
LV209
4.75M TUNE 1
LV210
4.75M TUNE 2
RV204
PGM 2 LEV ADJ
MUTE
AUDIO RESET
CN101
BLACK
CF201. 202
3.6M BPF
IC204
IC205
TP203
TP204
LV203
3.6M TUNE 1
LV204
3.6M TUNE 2
RV201
INCOM 1 LEV ADJ
CF203. 204
3.9M BPF
IC206
IC207
TP205
TP206
LV205
3.9M TUNE 1
LV206
3.9M TUNE 2
RV202
INCOM 2 LEV ADJ
STBY INCOM (TX) to CCU
STBY INCOM (RX) fr CCU
IC404 (1/2)
IC404 (2/2)
IC410
TP401
Q401
+5V
INCOM 1 R (X)
INCOM 2 R (X)
700PROTC TX (to CCU)
POWER CCU/OFF
POWER EXT/OFF
IC106
TONE GEN.
IC102
COUNTER (1/32)
IC103
SHIFT REGISTER (1/10)
IC104
IC101
X101
32.768KHz
1.024kHz
102.4Hz
Q102
150Hz LPF
Q103-105
5.6M FREQ-ADJ
CF101
5.6M BPF
TP101
IC806
A/D
IC801-803
RV801
RET (Y)
RET-A-Y (0-9)
RET-A-CD (0-9)
RET-A-F
RET-A-H
RET-A-74CLK
IC851-853
IC501 (2/2)
Format-1000/1001
RET-Y (0-9)
IC721. 722. 725. 727-729
Q721. 722. X721. 722
CCU 74M PLL
ADC CLK74
PLLH
REFH
74M-PLL-CLK
RV721
CK-DUTY
RET-74M-LATCH
ADDR (0-4)
XCS
XWRITE EN
XREAD EN
CPU BUS (0-7)
IC531
IC532
PLD DONE (SDI)
IC504
EPROM CONFIG
CN3
EPR
STBY (UNREG) / AU-PWR
THP41
IC41 (2/2). Q41
+10V REG
IC41 (1/2). Q42
+5V REG
IC42
+10_STB
+5V_STB
+3.3V
+2.5V
IC21
+3.8V (SDI)
THP11
IC11
+3.3V REG
+3.8V
THP31
IC31
+1.5V REG
+1.5V
+6V (SDI/TRIAX)
THP1
IC1 (2/2). Q1
IC1 (1/2). Q2
-5.5V (SDI/TRIAX)
THP2
-5V REG
-5V

Section 4
Schematic Diagrams

Index		Page
A.	AT-163	4-3
	AT-166	4-10
	AU-298	4-12
B.	BI-175	4-16
	BI-187	4-17
	BI-188	4-18
	BI-189	4-19
C.	CN-2578	4-20
	CN-2579	4-21
	CN-2602	4-22
	CN-2603/2603B	4-22
	CN-2604	4-23
	CN-2605	4-23
	CN-2606	4-24
	CN-2607	4-24
	CN-2608	4-24
	CN-2609	4-25
	CN-2614/2614B	4-25
	CN-2615	4-26
	CN-2616	4-26
	CN-2617	4-27
	CN-2618	4-28
	CN-2619	4-28
	CN-2620	4-29
	CN-2621	4-29
	CN-2622	4-30
	CN-2623	4-30
	CN-2640	4-30
	CN-2671	4-30
	CN-2712	4-31
	CN-2723	4-32
D.	DAP-33	4-33
	DPR-265	4-37
	DPR-265C	4-49
	DR-528	4-62
	DR-562	4-64
F.	FL-337	4-67
	FL-338	4-67
	Frame Wiring (HDC1000/1100)	4-138
	Frame Wiring (HDC1500/1550/1600)	4-139
	Frame Wiring (HDC1580)	4-140

Index		Page
L.	LE-291	4-68
	LE-308	4-70
	LE-309	4-71
M.	MB-1059	4-72
	MB-1060	4-74
	MX-109	4-78
P.	PA-317	4-81
	PA-317C	4-85
	PA-327	4-89
S.	SDI-84	4-93
	SDI-84C	4-101
	SW-1233	4-108
	SW-1236	4-110
	SW-1237	4-110
	SW-1238	4-111
	SW-1239	4-111
	SW-1240	4-111
	SW-1241/1241B	4-112
	SW-1242	4-112
	SW-1245	4-112
	SW-1273	4-113
T.	TG-243	4-114
	TG-243C	4-118
	TG-247	4-122
	TR-136	4-126
V.	VDA-63	4-133

Board List

Board Name	HDC 1000	HDC 1100	HDC 1500	HDC 1550	HDC 1580	HDC 1600
AT-163	○	○	○	○	○	○
AT-166/166G*	○	○	—	—	—	—
AU-298	○	○	○	○	○	○
BI-175	○	—	○	○	○	—
BI-187	—	○	—	—	—	○
BI-188	—	○	—	—	—	○
BI-189	—	○	—	—	—	○
CN-2578	○	—	○	○	○	—
CN-2579/2579G*	○	—	○	○	○	—
CN-2602	○	○	—	—	—	—
CN-2603/2603B	○	○	—	—	—	—
CN-2604	○	○	—	—	—	—
CN-2605	○	○	—	—	—	—
CN-2606	○	○	—	—	—	—
CN-2607	○	○	—	—	—	—
CN-2608	○	○	—	—	—	—
CN-2609/2609G*	○	○	—	—	—	—
CN-2614/2614B	—	—	○	○	○	○
CN-2615	—	—	○	○	○	○
CN-2616	—	—	○	○	○	○
CN-2617	—	—	○	○	○	○
CN-2618	—	—	○	○	○	○
CN-2619/2619G*	—	—	○	○	○	○
CN-2620	—	—	○	○	○	○
CN-2621/2621G*	—	—	○	○	○	○
CN-2622	—	—	○	○	○	○
CN-2623	—	—	○	○	○	○
CN-2640	—	—	○	○	○	○
CN-2671	○	○	—	—	—	—
CN-2712	—	○	—	—	—	○
CN-2723/2723G*	—	○	—	—	—	○
DAP-33	○	○	○	○	○	○
DPR-265	○	○	○	○	—	○
DPR-265C	—	—	—	—	○	—
DR-528/528G*	○	—	○	○	○	○
DR-562/562G*	—	○	—	—	—	○
FL-337	—	—	—	○	—	—
FL-338	—	—	—	○	—	—
LE-291	○	○	—	—	—	—

Board Name	HDC 1000	HDC 1100	HDC 1500	HDC 1550	HDC 1580	HDC 1600
LE-308	—	—	○	○	○	○
LE-309	○	○	—	—	—	—
MB-1059/1059G*	—	—	○	○	○	○
MB-1060/1060G*	○	○	—	—	—	—
MX-109	—	—	—	○	—	—
PA-317/317G*	○	—	○	○	—	—
PA-317CG	—	—	—	—	○	—
PA-327/327G*	—	○	—	—	—	○
SDI-84	○	○	○	—	—	○
SDI-84C	—	—	—	—	○	—
SW-1233/1233G*	○	○	—	—	—	—
SW-1236	—	—	○	○	○	○
SW-1237	—	—	○	○	○	○
SW-1238	—	—	○	○	○	○
SW-1239	—	—	○	○	○	○
SW-1240	—	—	○	○	○	○
SW-1241/1241B	—	—	○	○	○	○
SW-1242	—	—	○	○	○	○
SW-1245	—	—	○	○	○	○
SW-1273/1273G*	—	—	○	○	○	○
TG-243/243G*	○	—	○	○	—	—
TG-243CG	○	—	○	○	○	—
TG-247/247G*	—	○	—	—	—	○
TR-136	—	—	—	○	—	—
VDA-63	○	○	○	○	○	○

注意


＊印の基板は２種類ありますが，マニュアル内の記載では簡素化するため基板名には“G”を付けていません。


Note

The board with an asterisk (*) has two types. However, the board name in the manual does not have “G” at the end for simplification.

AT-163 (1/4)
SUFFIX: -12, 13

AT-163 (1/4)
SUFFIX: -12, 13

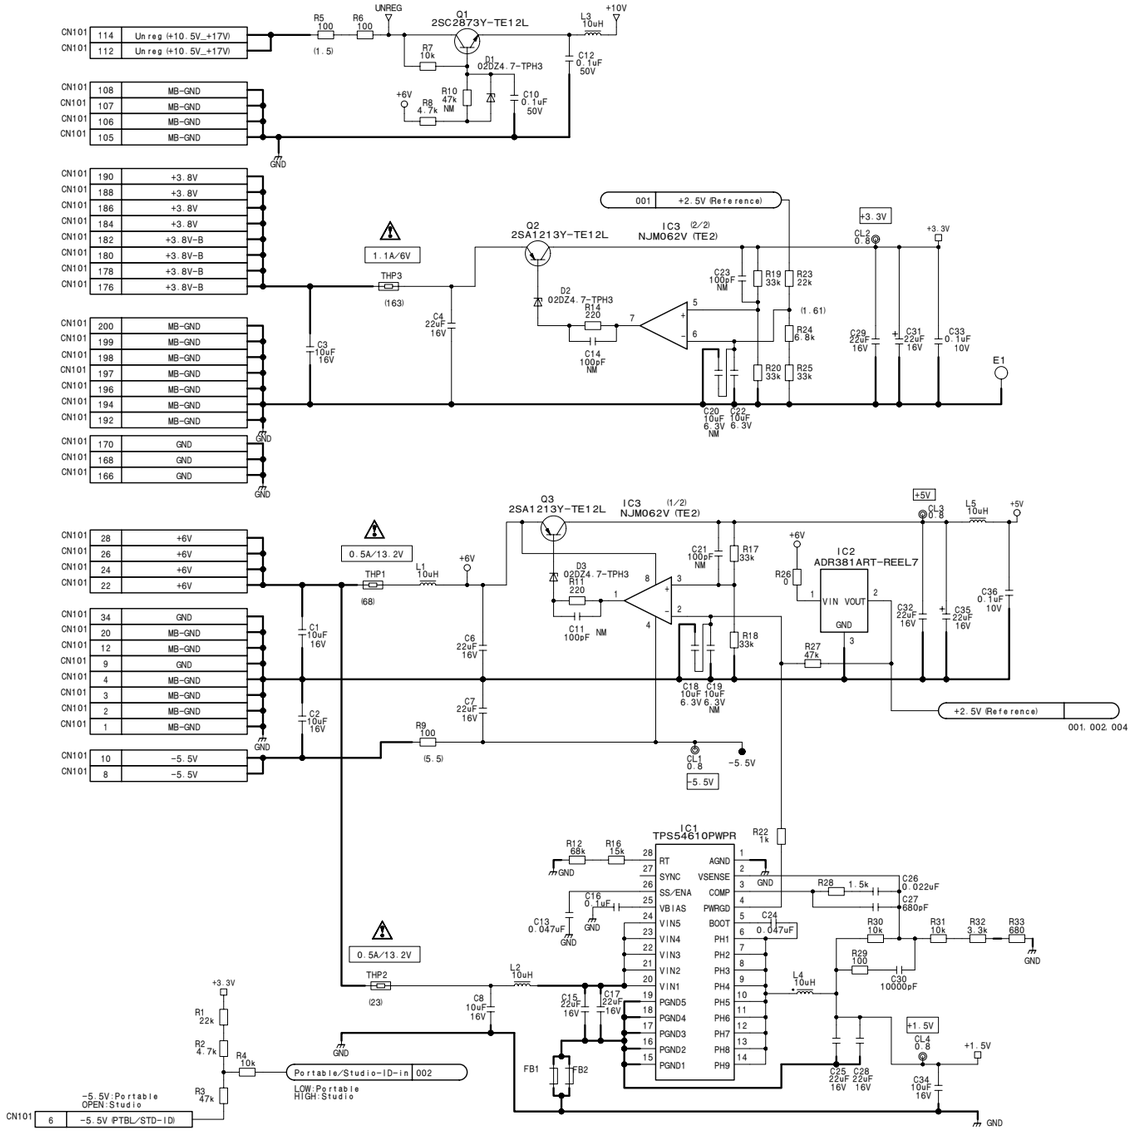

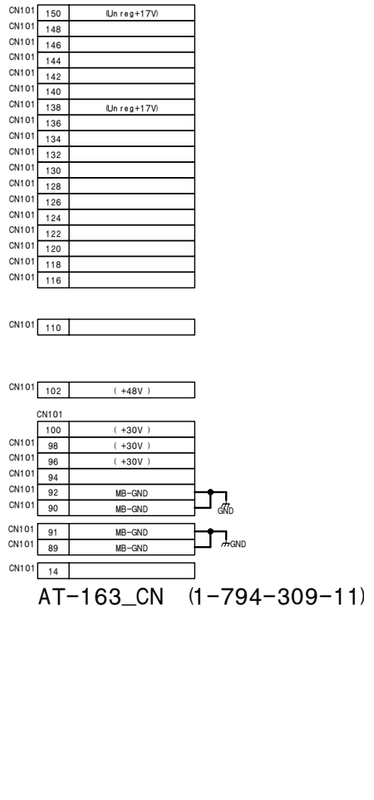



AT-163_CN (1-794-309-11)

AT-163 (1/4)
BOARD NO. 1-865-934-12, 13
HDC-1500_AT-163_012_1

AT-163 (2/4)
SUFFIX: -12, 13

AT-163 (2/4)
SUFFIX: -12, 13

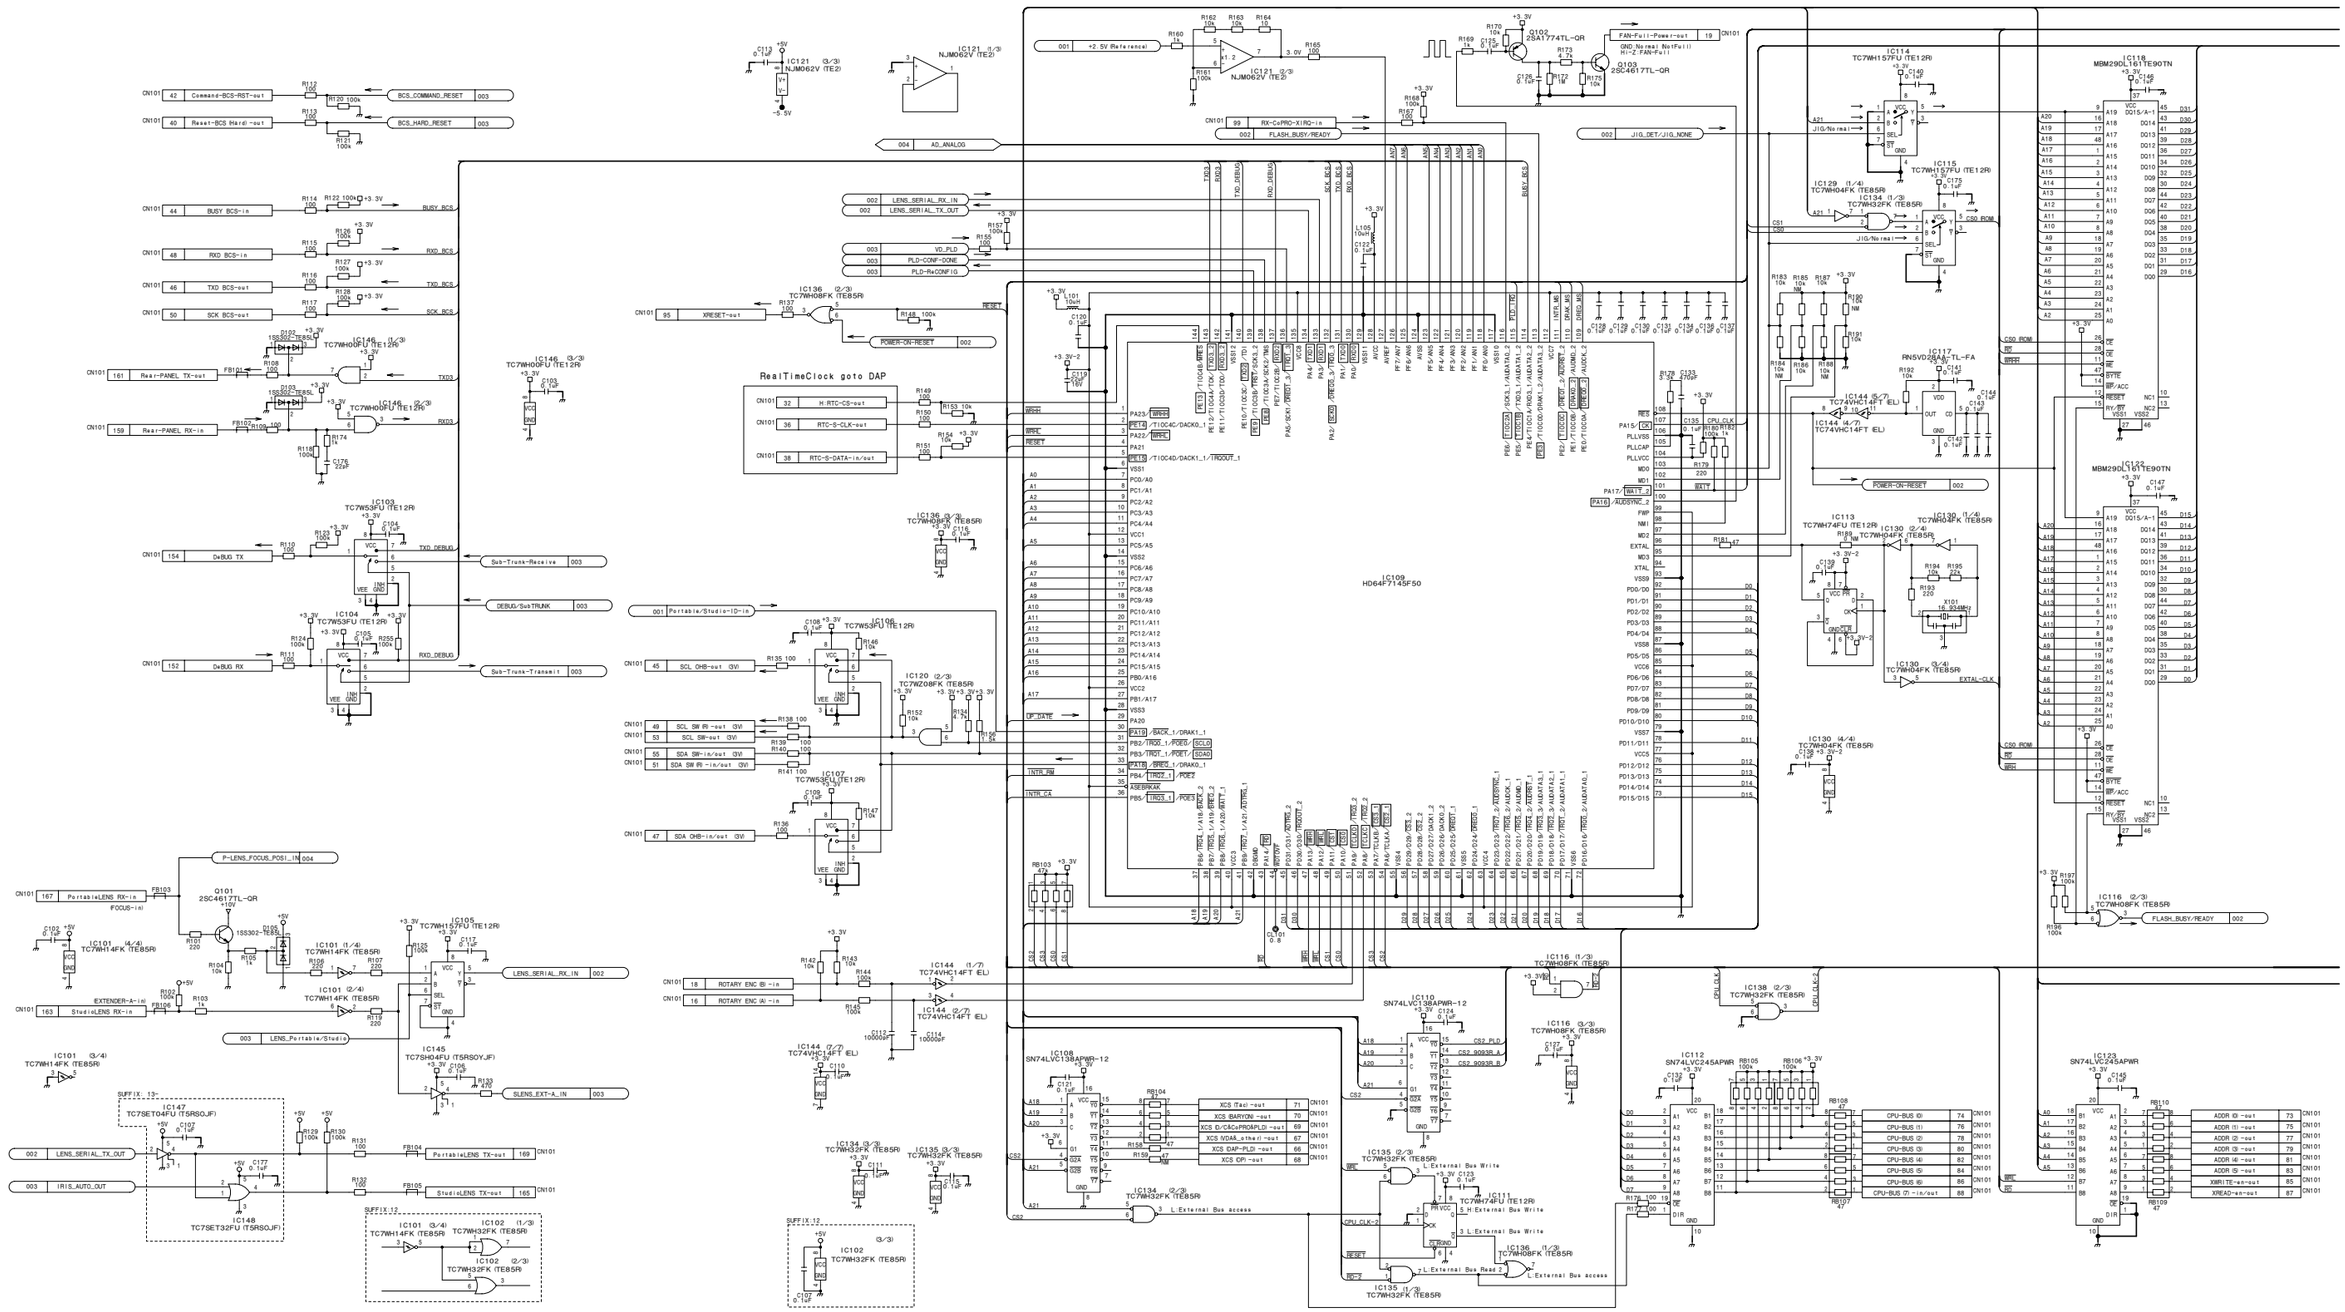

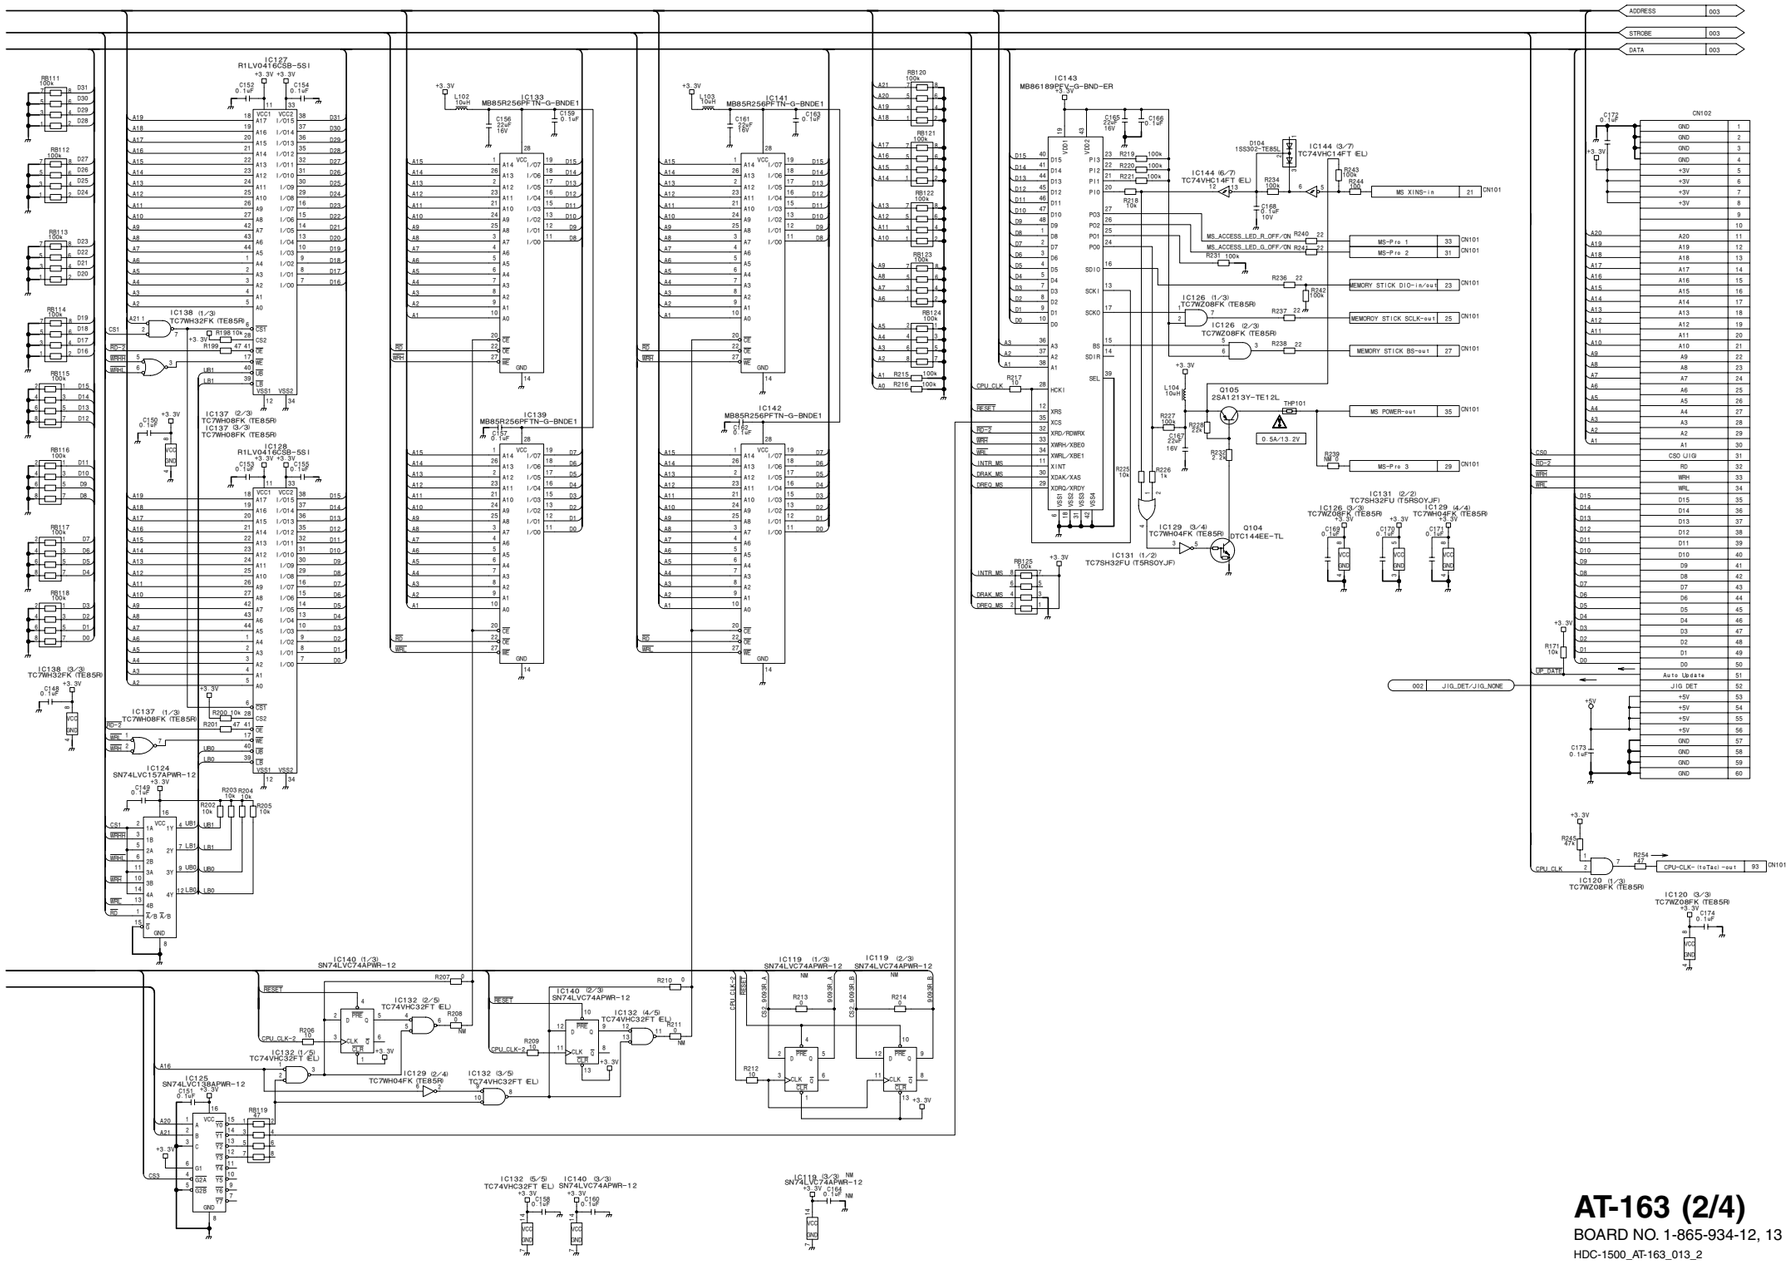


AT-163 (2/4)

BOARD NO. 1-865-934-12, 13

HDC-1500_AT-163_013_2


AT-163 (3/4)
SUFFIX: -12, 13

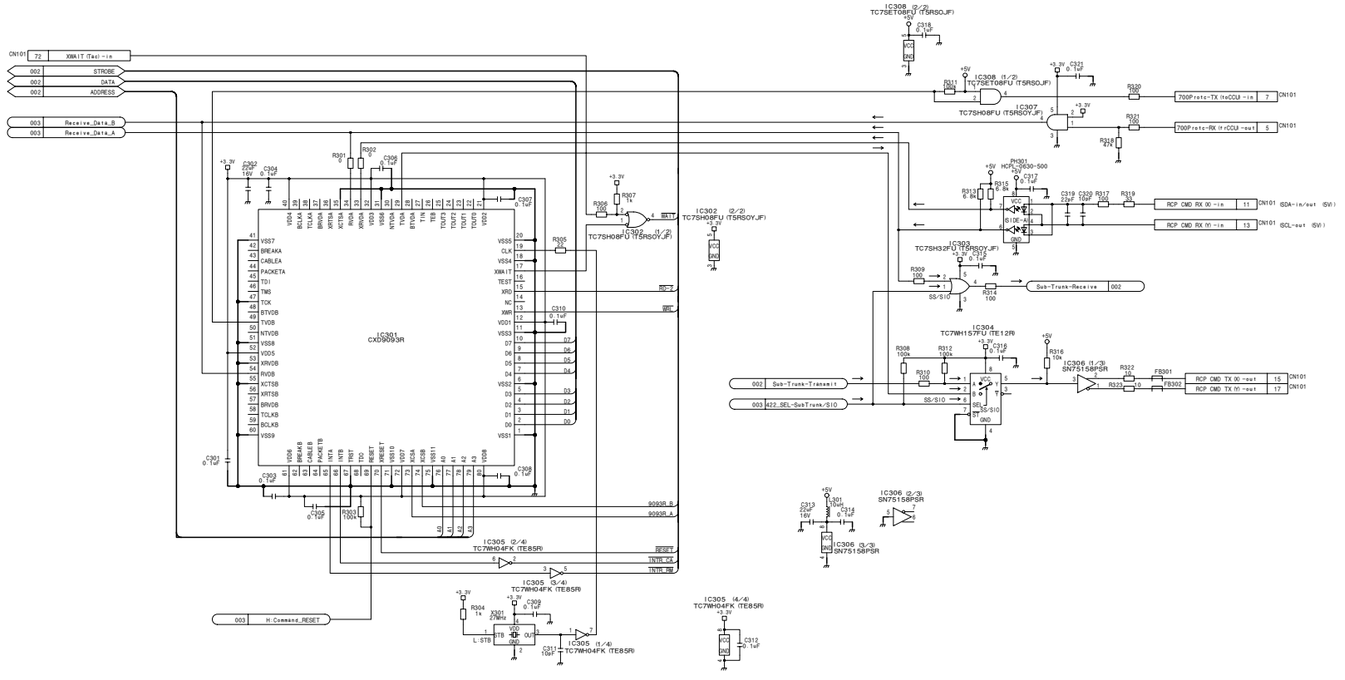


4-6

AT-163 (3/4)
SUFFIX: -12, 13


AT-163 (3/4)
SUFFIX: -12, 13

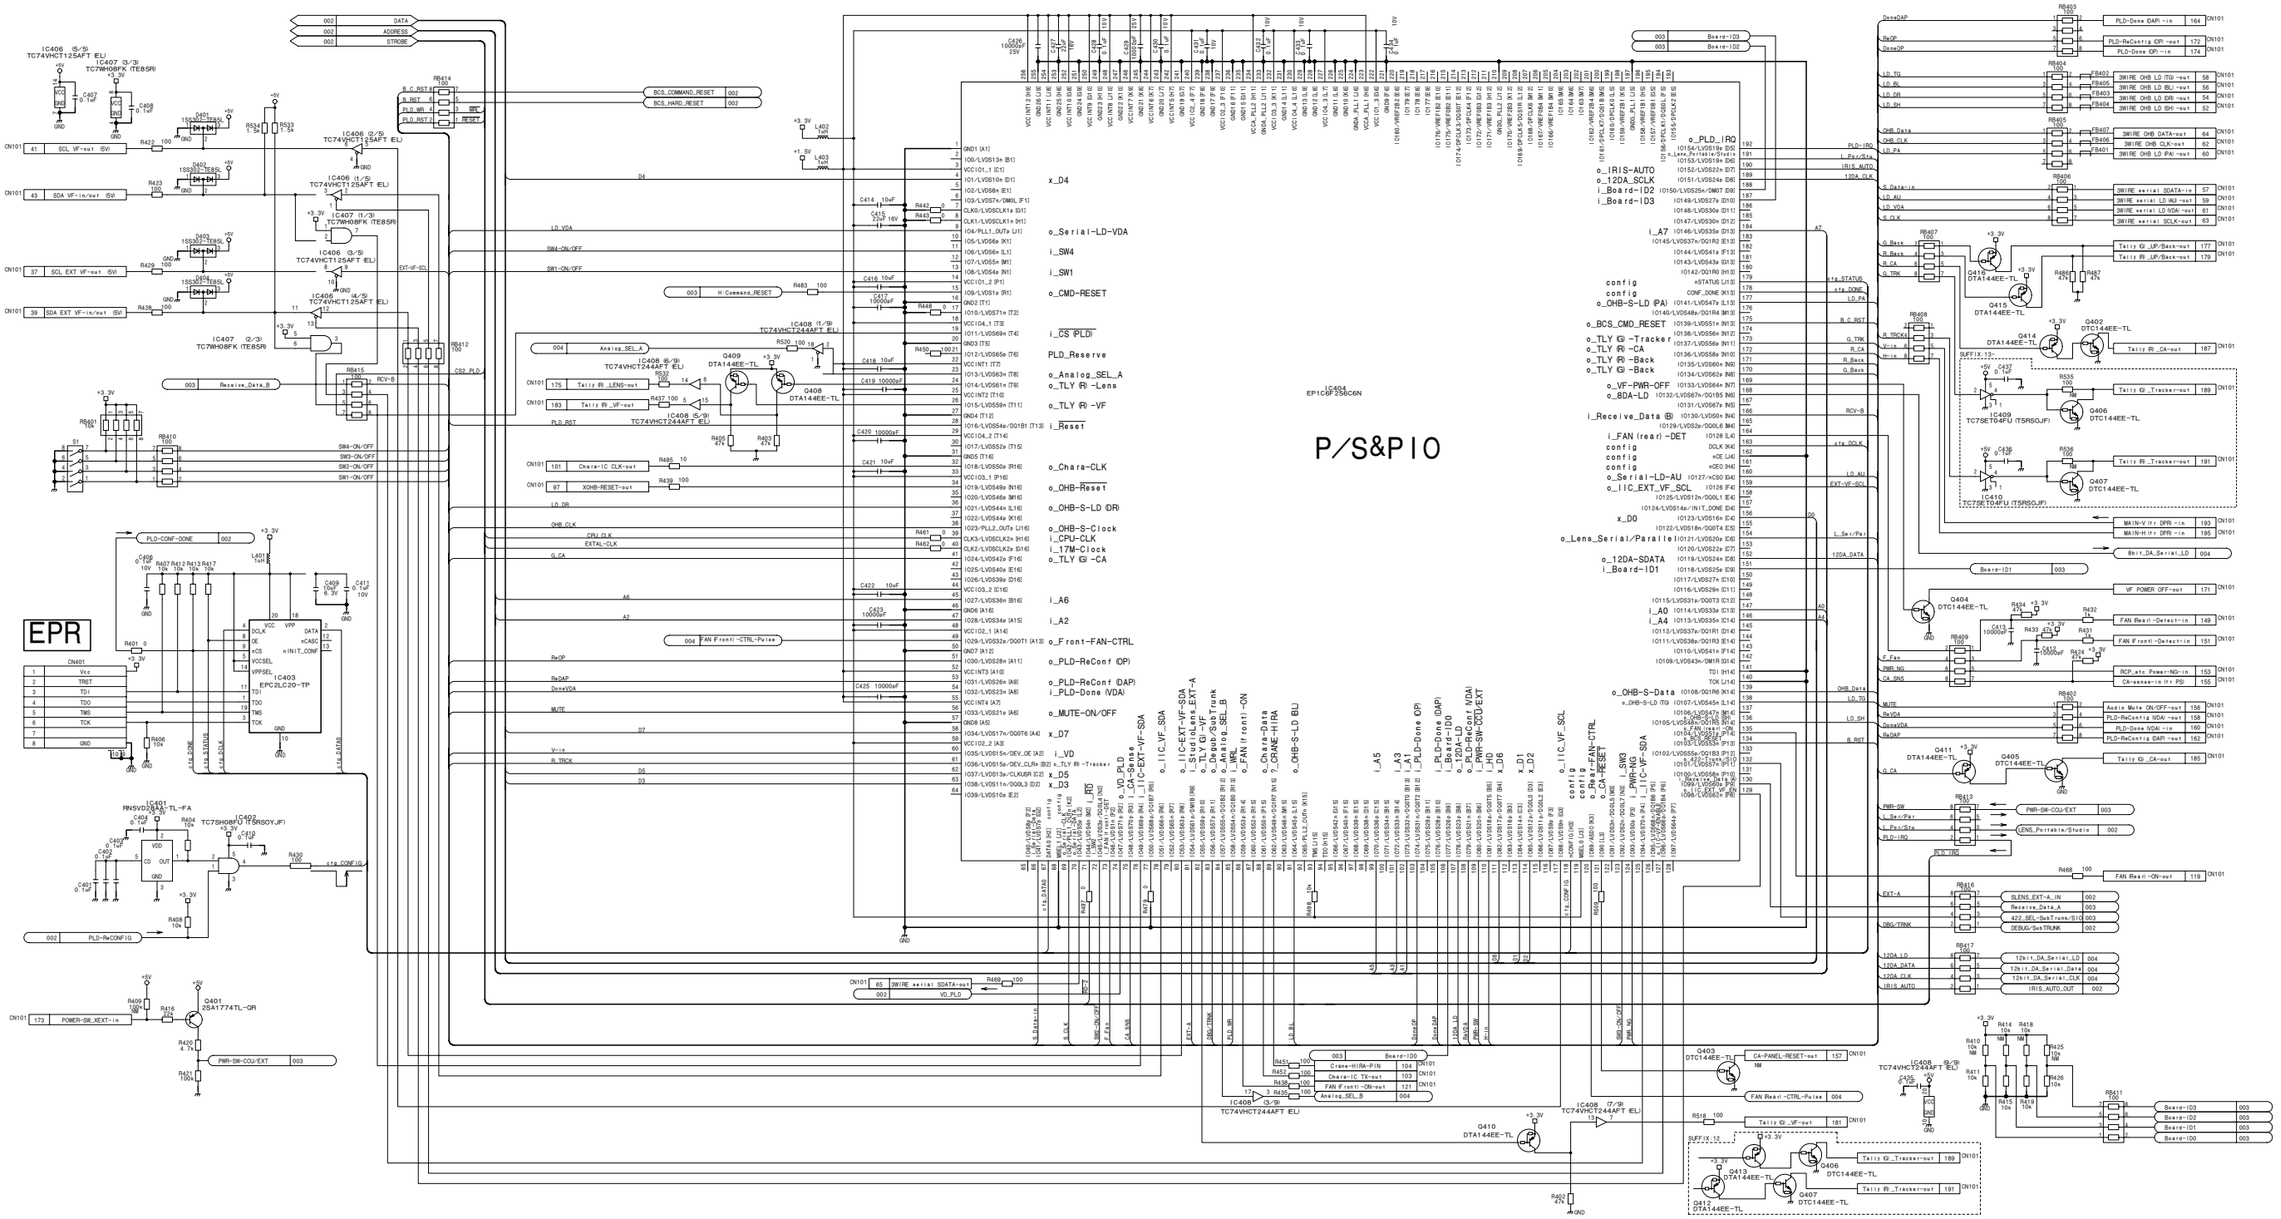

P/S&PIO
EPR
IC406 (5/5) TC74VHCT125AFT (EL)
IC407 (3/3) TC7WH08FK (TE85R)
IC406 (2/5) TC74VHCT125AFT (EL)
IC406 (1/5) TC74VHCT125AFT (EL)
IC407 (1/3) TC7WH08FK (TE85R)
IC406 (3/5) TC74VHCT125AFT (EL)
IC406 (4/5) TC74VHCT125AFT (EL)
IC407 (2/3) TC7WH08FK (TE85R)
IC408 (1/9) TC74VHCT244AFT (EL)
IC408 (6/9) TC74VHCT244AFT (EL)
IC408 (5/9) TC74VHCT244AFT (EL)
IC408 (3/9) TC74VHCT244AFT (EL)
IC408 (7/9) TC74VHCT244AFT (EL)
IC408 (9/9) TC74VHCT244AFT (EL)
IC404 EP16P256C6N
IC403 EPC2LC20-TP
IC401 RN5VD08A-TL-FA
IC402 TC7SH08FU,TE85RSOYJF)
IC409 TC7SET04FU (TSRSOJF)
IC410 TC7SET04FU (TSRSOJF)
Q401 2SA1774TL-QR
Q402 DTC144EE-TL
Q403 DTC144EE-TL
Q404 DTC144EE-TL
Q405 DTC144EE-TL
Q406 DTC144EE-TL
Q407 DTC144EE-TL
Q408 DTA144EE-TL
Q409 DTA144EE-TL
Q410 DTA144EE-TL
Q411 DTA144EE-TL
Q412 DTA144EE-TL
Q413 DTA144EE-TL
Q414 DTA144EE-TL
Q415 DTA144EE-TL
Q418 DTA144EE-TL
SUFFIX:13-
SUFFIX:12-
PLD-CONF-DONE
Receive_Data_B
Analog_SEL_A
Chara-IC CLK-out
XCHG-RESET-out
H-Command_RESET
FAN Front-CTRL-Pulse
BCS_COMMAND_RESET
BCS_HARD_RESET
PLD-ReConfig
POWER-SW_XEXT-in
PWR-SW-CCU/EXT
Board-ID3
Board-ID2
Board-ID1
Board-ID0
MAIN-V Ifr. DPR -in
MAIN-H Ifr. DPR -in
Bkit_DA_Serial_LD
VF POWER OFF-out
FAN Rear -Detect-in
FAN Front -Detect-in
RCP_etc Power-NG-in
CA-sense-in Ifr PS
Audio Mute ON/OFF-out
PLD-ReConfig (VDA) -out
PLD-Done (VDA) -in
PLD-ReConfig (DAP) -out
Tally IR _CA-out
Tally IR _Tracker-out
Tally IG _Tracker-out
Tally IG _LVF-out
Tally IG _LVF-Back-out
Tally IR _LVF-Back-out
Tally IG _CA-out
CA-PANEL-RESET-out
FAN Rear -CTRL-Pulse
FAN Front -CTRL-Pulse
SLENS_EXT-A_IN
Remote_Data_A
422_SEL_SubTrunk/SIO
DEBUG/SubTRUNK
12bit_DA_Serial_LD
12bit_DA_Serial_Data
12bit_DA_Serial_CLK
IRIS_AUTO_OUT
3WIRE serial SDATA-out
VD_PLD
3WIRE OHB LD TG -out
3WIRE OHB LD BL -out
3WIRE OHB LD GR -out
3WIRE OHB LD SH -out
3WIRE OHB DATA-out
3WIRE OHB CLK-out
3WIRE OHB LD PA -out
3WIRE serial SDATA-in
3WIRE serial LD VDA-out
3WIRE serial SCLK-out
PLD-IRQ
PLD_Par/Ser
IRIS_AUTO
12DA_CLK
12DA_SDATA
12DA_LD
12DA_DATA
12DA_CLK
IRIS_AUTO
o_PLD_IRQ
o_IRIS-AUTO
o_12DA_SCLK
i_Board-ID2
i_Board-ID3
o_BCS_CMD_RESET
o_TLY (G) -Tracker
o_TLY (R) -CA
o_TLY (R) -Back
o_TLY (G) -Back
o_VF-PWR-OFF
o_8DA-LD
i_Receive_Data (B)
i_FAN (rear) -DET
o_Serial-LD-AU
o_IIC_EXT_VF_SCL
x_D0
o_Lens_Serial/Parallel
o_12DA-SDATA
i_Board-ID1
o_OHB-S-Data
o_OHB-S-LD (TG)
o_OHB-S-LD (BL)
o_OHB-S-LD (GR)
o_OHB-S-LD (SH)
o_OHB-S-LD (DR)
o_OHB-S-Clock
i_CPU-CLK
i_17M-Clock
o_TLY (G) -CA
i_A6
i_A2
o_Front-FAN-CTRL
o_PLD-ReConf (OP)
o_PLD-ReConf (DAP)
i_PLD-Done (VDA)
o_MUTE-ON/OFF
x_D7
i_VD
o_Tracker-FAN-CTRL
i_CA-RESET
i_PWR-NG
i_IIC-VF-SDA
o_IIC_VF_SCL
i_SW3
o_IIC-EXT-VF-SDA
i_Studio/Lens_EXT-A
o_TLY (G) -VF
o_Depub/SubTrunk
o_Chara-SEL_B
i_MPL
i_FAN (front) -ON
o_Chara-Data
?_CRANE-HIRA
o_OHB-S-LD BU
i_A5
i_A3
i_A1
o_PLD-Done (OP)
o_12DA-LD
o_PLD-ReConf (VDA)
i_PWR-SW-CCU/EXT
x_D6
x_D1
x_D2
x_D4
x_D5
x_D3
i_RD
o_VD_PLD
i_CA-Sense
o_IIC_VF_SDA
o_IIC-EXT-VF-SDA
i_Studio/Lens_EXT-A
o_TLY (G) -VF
o_Depub/SubTrunk
o_Chara-SEL_B
i_MPL
i_FAN (front) -ON
o_Chara-Data
?_CRANE-HIRA
o_OHB-S-LD BU
i_A5
i_A3
i_A1
o_PLD-Done (OP)
o_12DA-LD
o_PLD-ReConf (VDA)
i_PWR-SW-CCU/EXT
x_D6
x_D1
x_D2
o_IIC_VF_SCL
config
config
o_Tracker-FAN-CTRL
o_CA-RESET
i_SW3
i_PWR-NG
i_IIC-VF-SDA
o_IIC_VF_SDA
o_Front-FAN-CTRL
i_CA-SENS
i_F_Fan
i_PWR_NG
o_OHB-S-Data
o_OHB-S-LD (TG)
o_OHB-S-LD (BL)
o_OHB-S-LD (GR)
o_OHB-S-LD (SH)
o_OHB-S-LD (DR)
o_OHB-S-Clock
i_CPU-CLK
i_17M-Clock
o_TLY (G) -CA
i_A6
i_A2
o_Front-FAN-CTRL
o_PLD-ReConf (OP)
o_PLD-ReConf (DAP)
i_PLD-Done (VDA)
o_MUTE-ON/OFF
x_D7
i_VD
o_VD_PLD
i_CA-Sense
o_IIC_VF_SDA

AT-163 (4/4)
SUFFIX: -12, 13

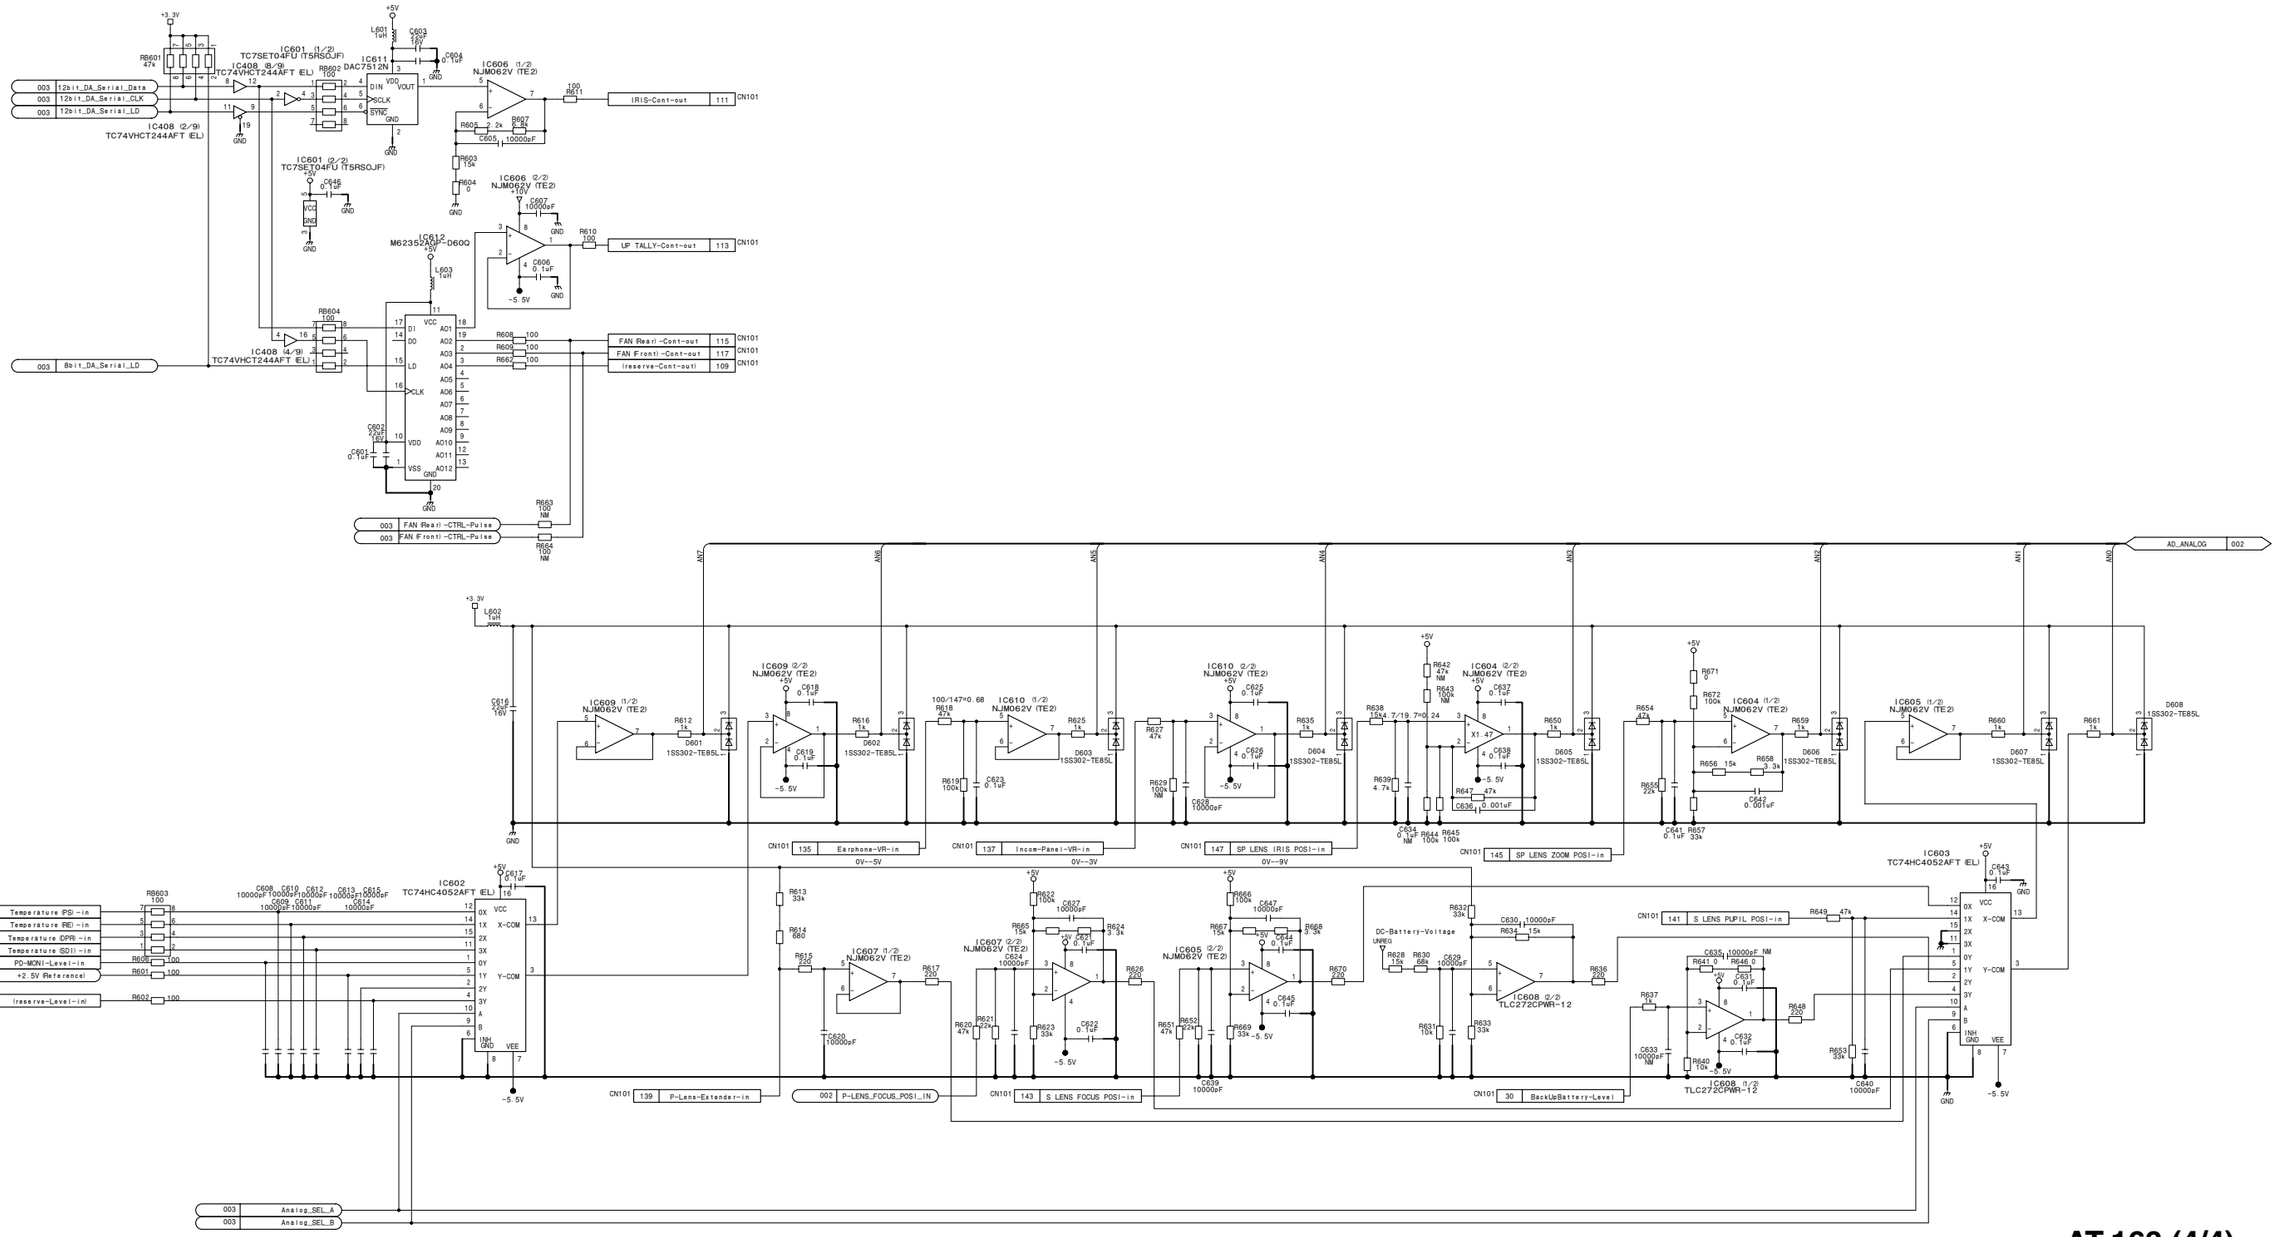


AT-163 (4/4)
BOARD NO. 1-865-934-12, 13
HDC-1500_AT-163_012_4

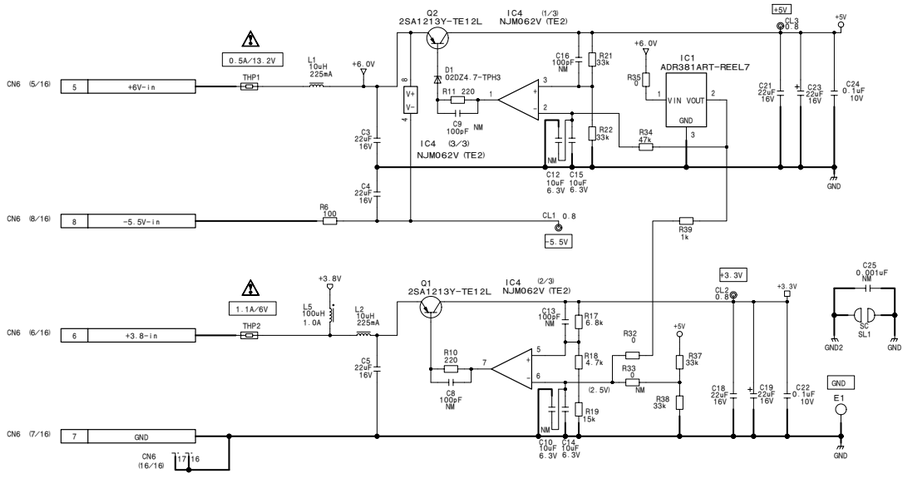




CHU_IF & UpTally

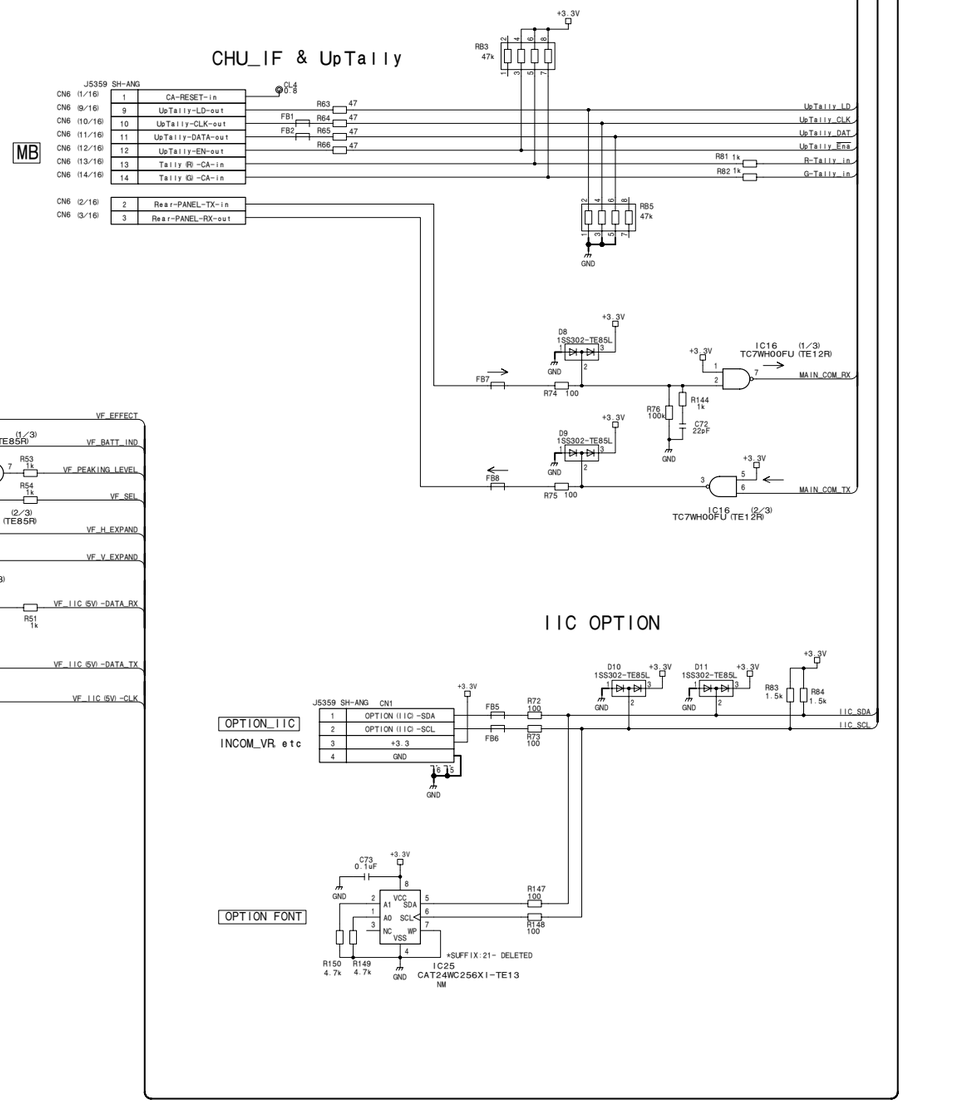

VF CONTROL

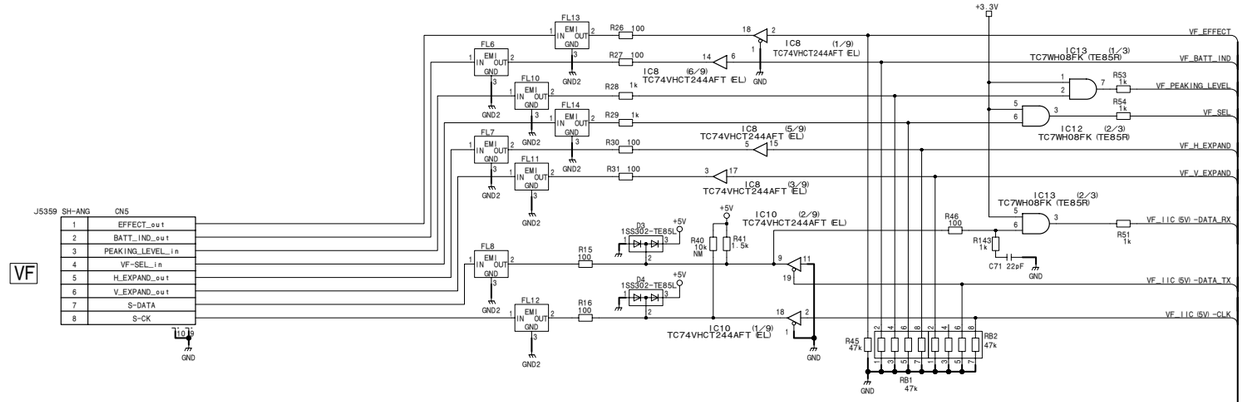

IIC OPTION

FACTORY CONFIG

VR INPUT

Rear Panel
J6491 0.5FFC-ST 30pin×2

*NOTE

REF. NO.	SUFFIX 11	SUFFIX 21~
CN3	MT	NM
R106	100k	1k
R162	–	1k
R163	–	0

	BOOT	NORMAL
MODE0	1	1
MODE1	1	1
MODE2	0	1

AT-166
BOARD NO. 1-865-406-11, 21
HDC-1000_AT-166G_021_1

AU-298 (1/4)
SUFFIX: -12

+16, +7.5, +5 , −5

CN1

CN1	200	MB-GND	MB-GND	199 CN1
CN1	198	MB-GND	MB-GND	197 CN1
CN1	196	MB-GND	MB-GND	195 CN1
CN1	194	MB-GND		
CN1	192	MB-GND		
CN1	190	+3.8V		
CN1	188	+3.8V		187 CN1
CN1	186	+3.8V		
CN1	184	+3.8V		
CN1	182	+3.8V-B		
CN1	180	+3.8V-B		179 CN1
CN1	178	+3.8V-B		
CN1	176	+3.8V-B		
CN1	174			173 CN1
CN1	172			171 CN1
CN1	170	GND		
CN1	168	GND		
CN1	166	GND		165 CN1
CN1	162			
CN1	160			
CN1	158			157 CN1
CN1	154			
CN1	152			
CN1	150	IUnreg+17V		149 CN1
CN1	148	IUnreg+17V		
CN1	146	IUnreg+17V		
CN1	144	IUnreg+17V		
CN1	142	IUnreg+17V	GND	141 CN1
CN1	140	IUnreg+17V	GND	139 CN1
CN1	138	IUnreg+17V		
CN1	136	IUnreg+17V		
CN1	134	IUnreg+17V		133 CN1
CN1	132	IUnreg+17V		
CN1	130	IUnreg+17V		
CN1	128	IUnreg+17V		127 CN1
CN1	126	IUnreg+17V		
CN1	124	IUnreg+17V		
CN1	122	IUnreg+17V		
CN1	120	IUnreg+17V		
CN1	118	STBY-AU-Pow IUnreg	-in	
CN1	116	STBY-AU-Pow IUnreg	-in	
CN1	114	Unreg I+10.5V_	+17V	
CN1	112	Unreg I+10.5V_	+17V	
CN1	110	INC		
CN1	108	MB-GND	MB-GND	107 CN1
CN1	106	MB-GND	MB-GND	105 CN1
CN1	104	INC		
CN1	117			CN1
CN1	115			CN1
CN1	113			CN1
CN1	109			CN1

10-17-(2)6

0.225Amax

CN1 111 STBY-POW-out → to REAR VOL (incom1)

CN1 88 volt_out 0-3V
CN1 87 volt_in 0-5V

CN1 86 Fvol_out
CN1 85 Fvol_in

CN1 82 incom1-on/off (REAR)
CN1 80 incom1-on/off (RET-CN)
CN1 78 incom1-on/off (LENS)
CN1 76 incom1-on/off (DEMAND)

L:ON H:off
L:ON Hiz:off

CN1 79 3W-DIN
CN1 77 3W-CLK
CN1 75 3W-LD
CN1 73 3W-DOUT

Hi=0.5VCC

001, 002 STBY-NRML
001 NRML/STBY

CN1	94	NC		93 CN1
CN1	92	MB-GND	MB-GND	91 CN1
CN1	90	MB-GND	MB-GND	89 CN1
CN1	84			83 CN1
CN1	74			
CN1	72			71 CN1
CN1	70			CN1 69 from_tsDAP1 POW-ON/NG 67 CN1
CN1	68			
CN1	66			
CN1	64			
CN1	62			
CN1	60			59 CN1
CN1	58			
CN1	56			
CN1	54			
CN1	52			53 CN1
CN1	50			
CN1	48			
CN1	46			
CN1	44			
CN1	42			
CN1	40			
CN1	38	GND		
CN1	36	GND		
CN1	34	GND		
CN1	32			
CN1	30			
CN1	28	+6V		
CN1	26	+6V		
CN1	24	+6V		
CN1	22	+6V		
CN1	20	MB-GND		
CN1	18			
CN1	16			
CN1	14			
CN1	12	MB-GND		
CN1	10	−5.5V		
CN1	8	−5.5V		
CN1	6	STBY −5.5V		
CN1	4	MB-GND	MB-GND	3 CN1
CN1	2	MB-GND	MB-GND	1 CN1
		GND		9 CN1
				29 CN1
				27 CN1
				25 CN1
				23 CN1
				21 CN1

0.225Amax

IC1 AK9813BF-E2 — IC11 AK9813BF-E2 — IC12 AK9813BF-E2 — IC13 AK9813BF-E2

inc1 — MODE — GAIN

JC0 incom1-UNBAL-ON/OFF 002
JC1 incom1-pow-ON/OFF 002
JC2 iG1-3
JC3 iG1-2
JC4 iG1-1
JC5 iG1-0
JC6 incom1-GAIN 002

incom1

0000 : −20dB
1000 : −30dB
1100 : −40dB
1110 : −50dB
1111 : −60dB

JC7 incom2-RTS-ON/off 003
JC8 incom2-MIC-ON/off 003
JC9 incom2-UNBAL-ON/OFF 003
JC10 incom2-pow-ON/OFF 003
JC11 2-AB-ON/OFF 004
JC12 2-PH-ON/OFF 004
JC13 2-F/R 004
JC14 1-AB-ON/OFF 004
JC15 1-PH-ON/OFF 004
JC16 1-F/R 004

incom2

MIC2
MIC1

JC17 iG2-3
JC18 iG2-2
JC19 iG2-1
JC20 iG2-0
JC21 incom2-GAIN 003
JC22 MG2-3
JC23 MG2-2
JC24 MG2-1
JC25 MG2-0
JC26 MIC2-GAIN 004
JC27 MG1-3
JC28 MG1-2
JC29 MG1-1
JC30 MG1-0
MIC1-GAIN 004

IC15 NJM062V (TE2) — IC16 NJM062V (TE2) — IC18 TL7705CPS-B-E20 — IC19 TC7WH125FU (TE12R) — IC20 NJM062V (TE2) — IC21 NJM062V (TE2)

Q1 2SC4617TL-QR — Q2 2SC4617TL-QR — Q3 2SA1213Y-TE12L — Q4 2SC2873Y-TE12L — Q5 2SC2873Y-TE12L — Q6 2SC2873Y-TE12L — Q7 2SA1774TL-QR — Q8 2SC4617TL-QR

D1 SCB02-04-TE12RA — D2 SCB02-04-TE12RA — D3 RD20SB-T1 — D4 RD20SB-T1 — D7 RD8.2SB-T1 — D8 RD8.2SB-T1


IC2 IC3 IC5 NJM062V (TE2) — IC4 ADR381ART-REEL7

STBY


AU-298 (1/4)
BOARD NO. 1-865-933-12
HDC-1500_AU-298_012_1

AU-298 (2/4)
SUFFIX: -12

AU-298 (2/4)
SUFFIX: -12

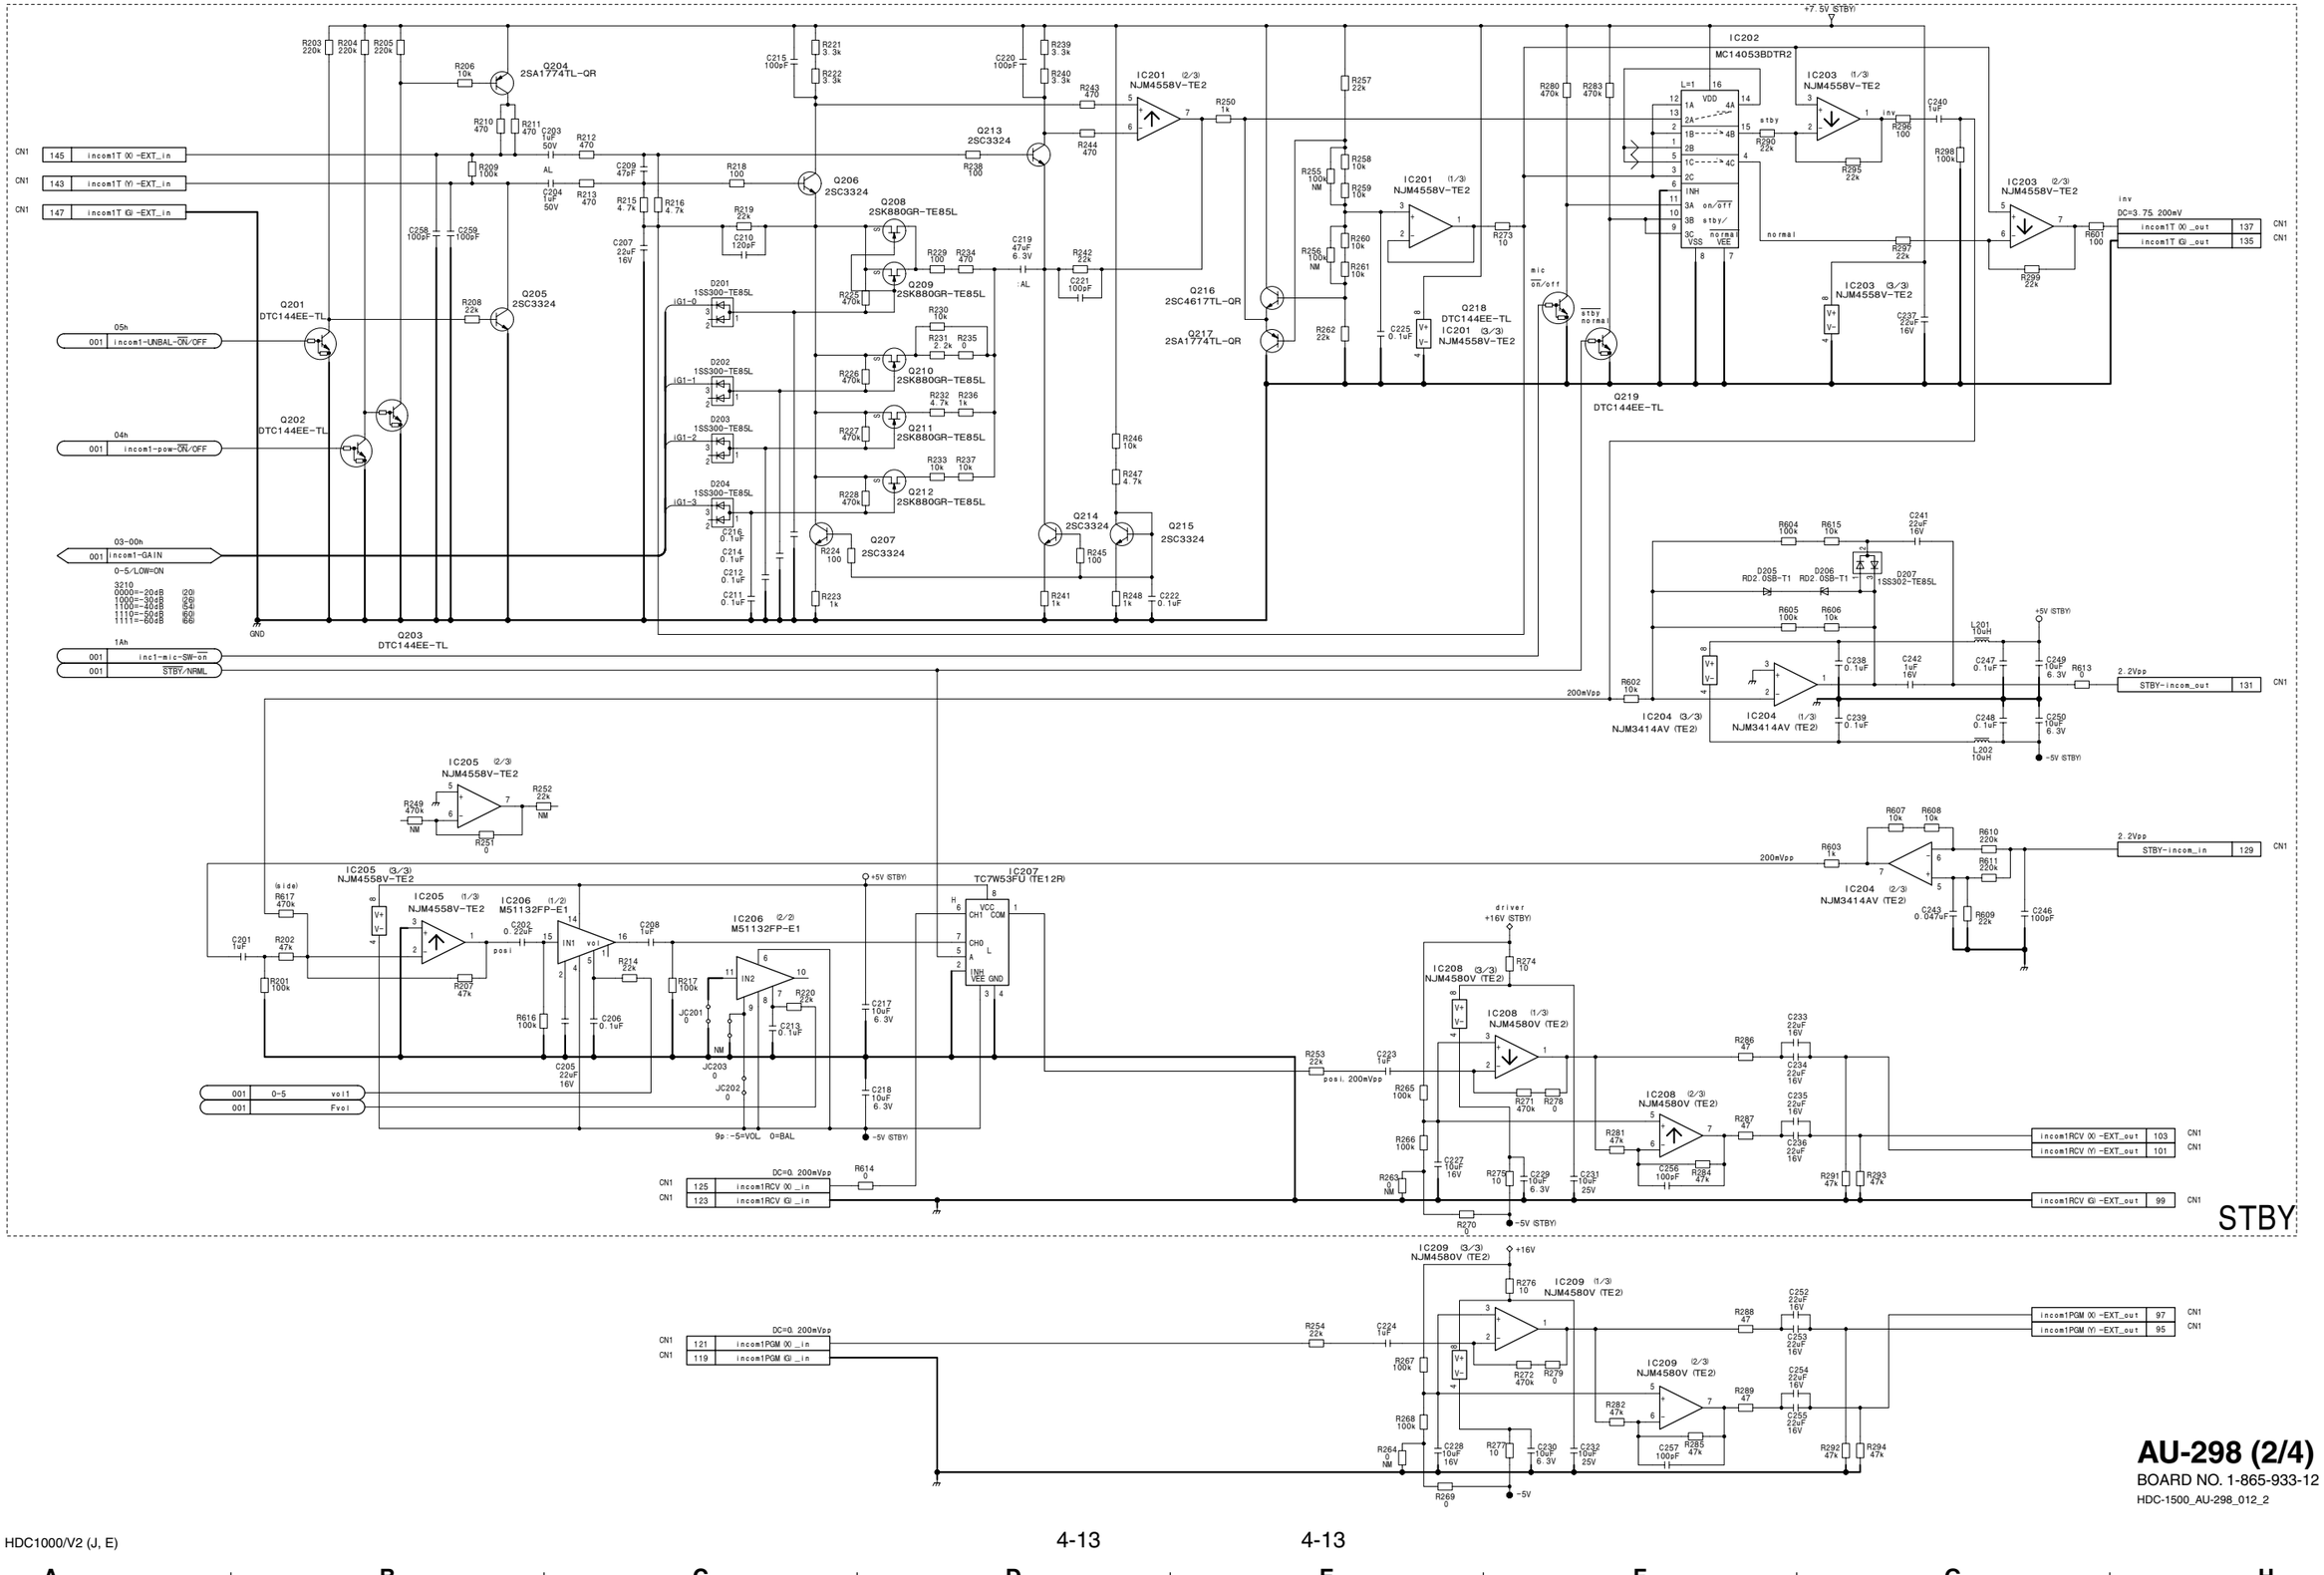

AU-298 (2/4)
BOARD NO. 1-865-933-12
HDC-1500_AU-298_012_2

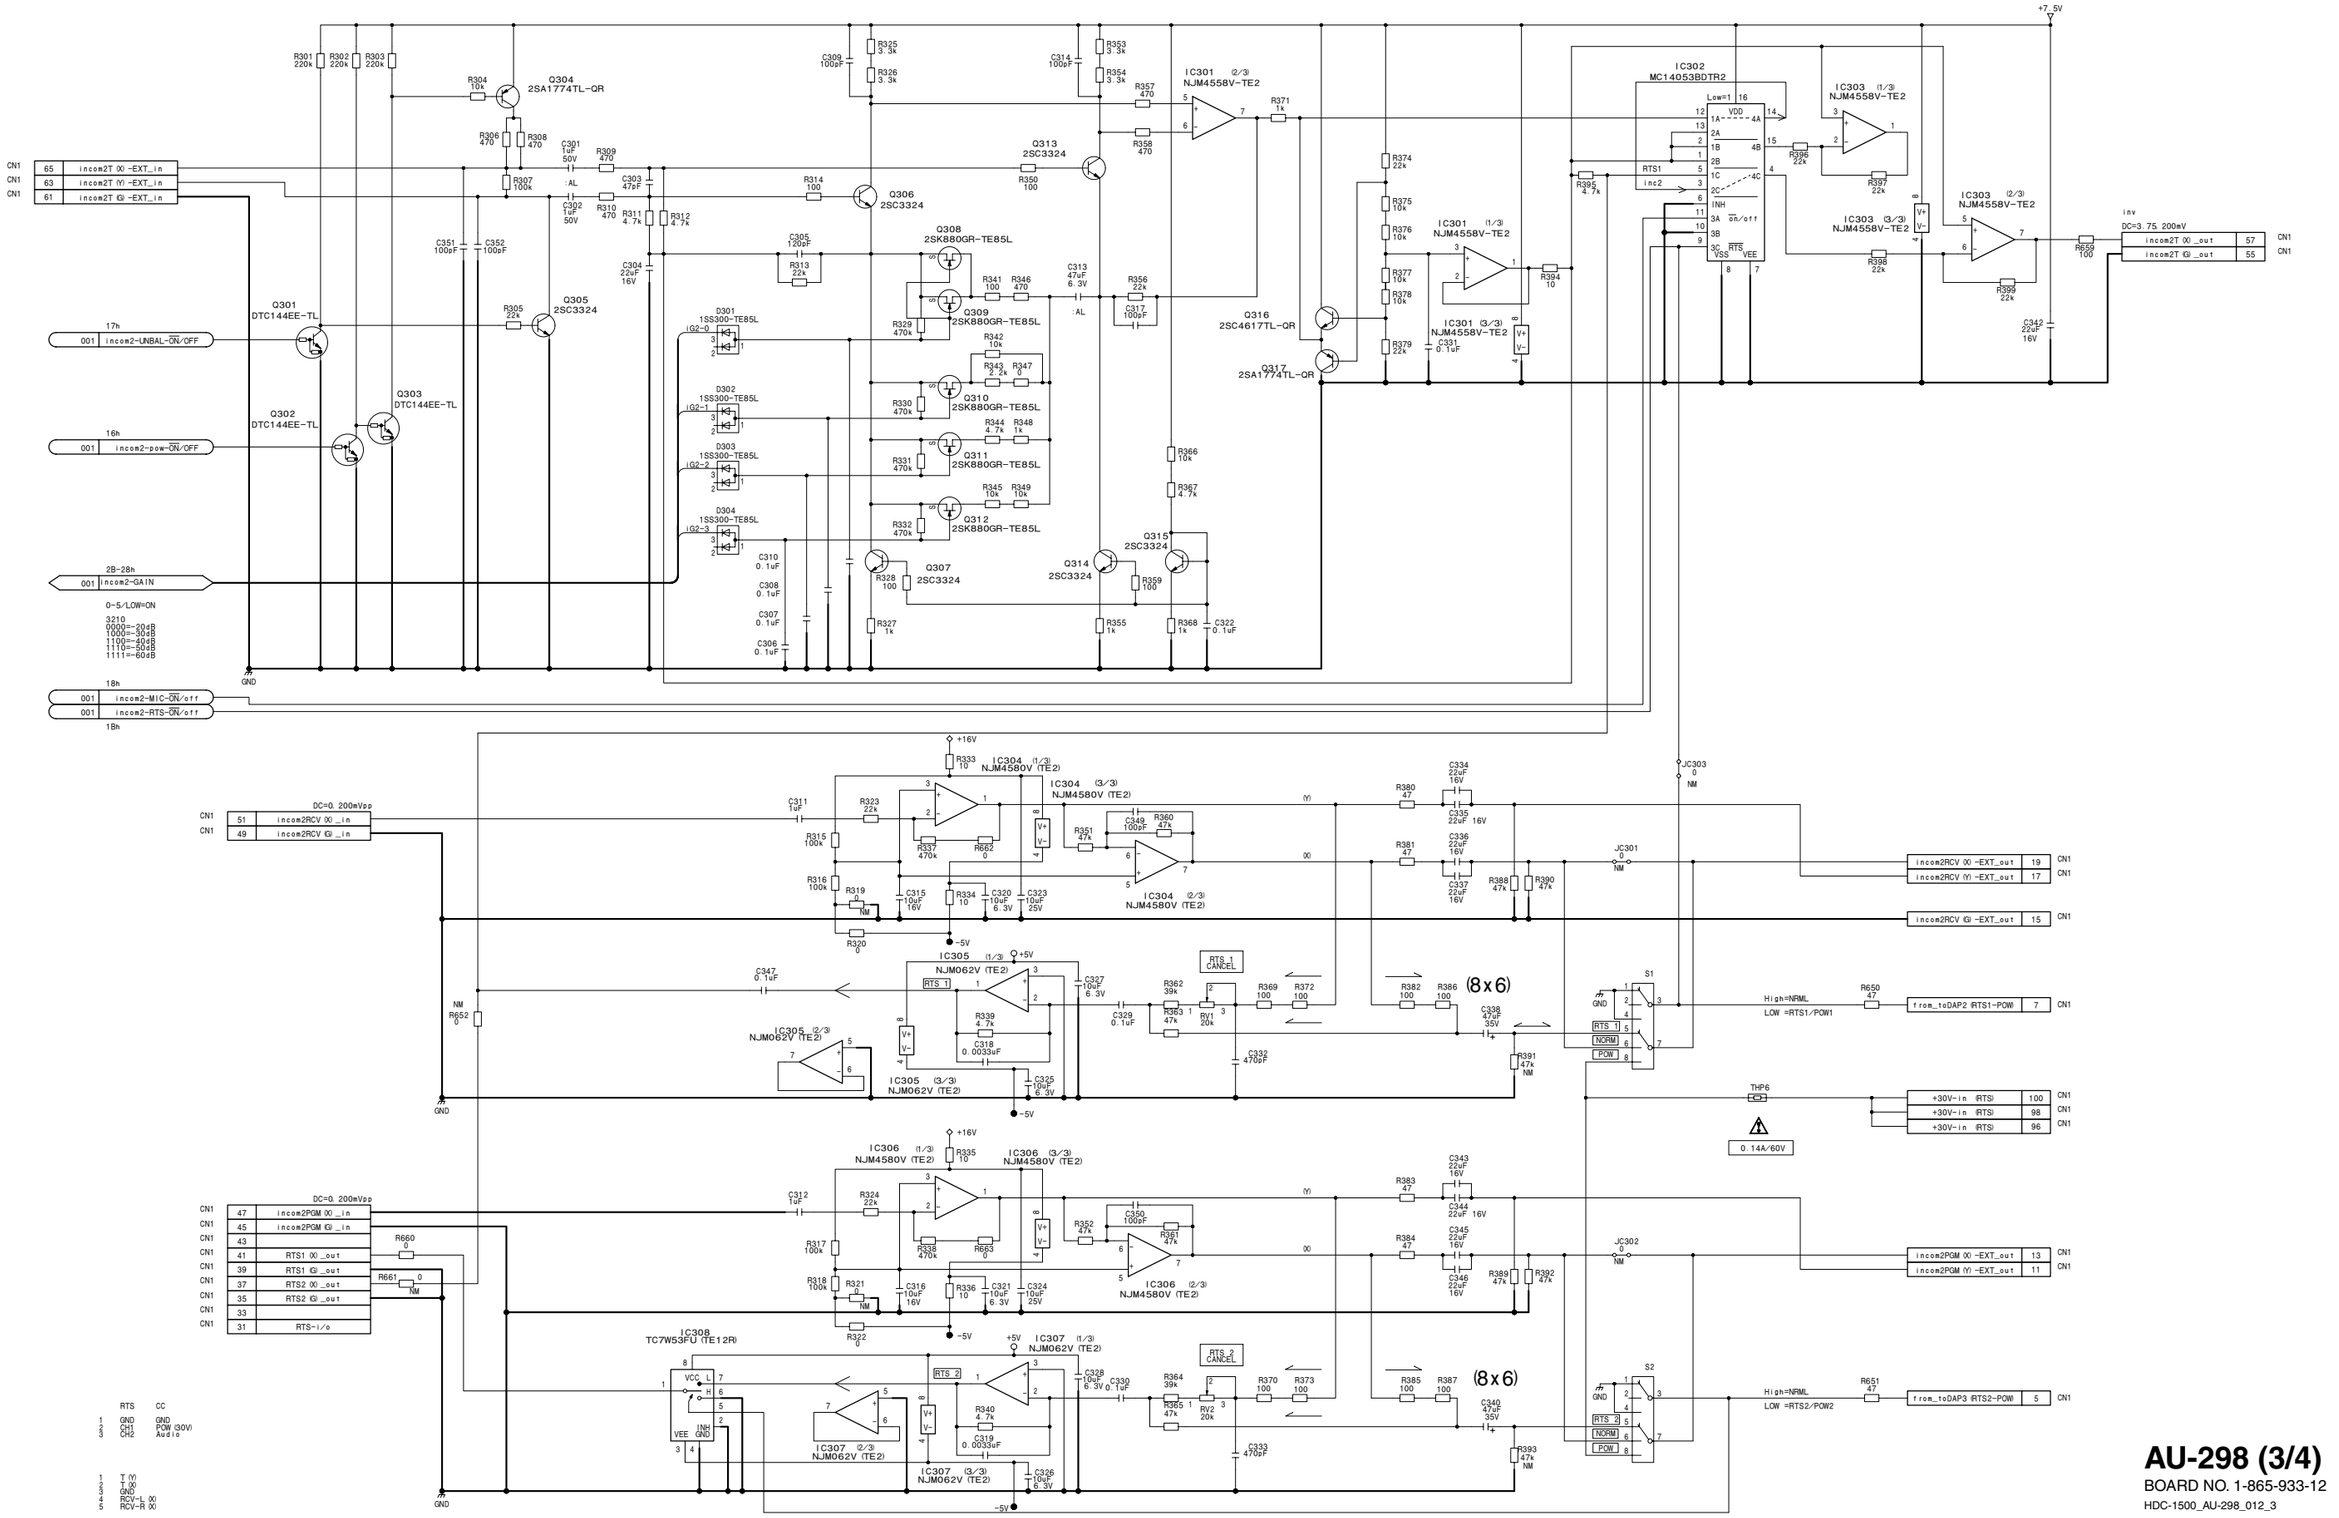


AU-298 (3/4)
BOARD NO. 1-865-933-12
HDC-1500_AU-298_012_3


HDC1000/V2 (J, E)

AU-298 (4/4)
SUFFIX: -12


AU-298 (4/4)
SUFFIX: -12

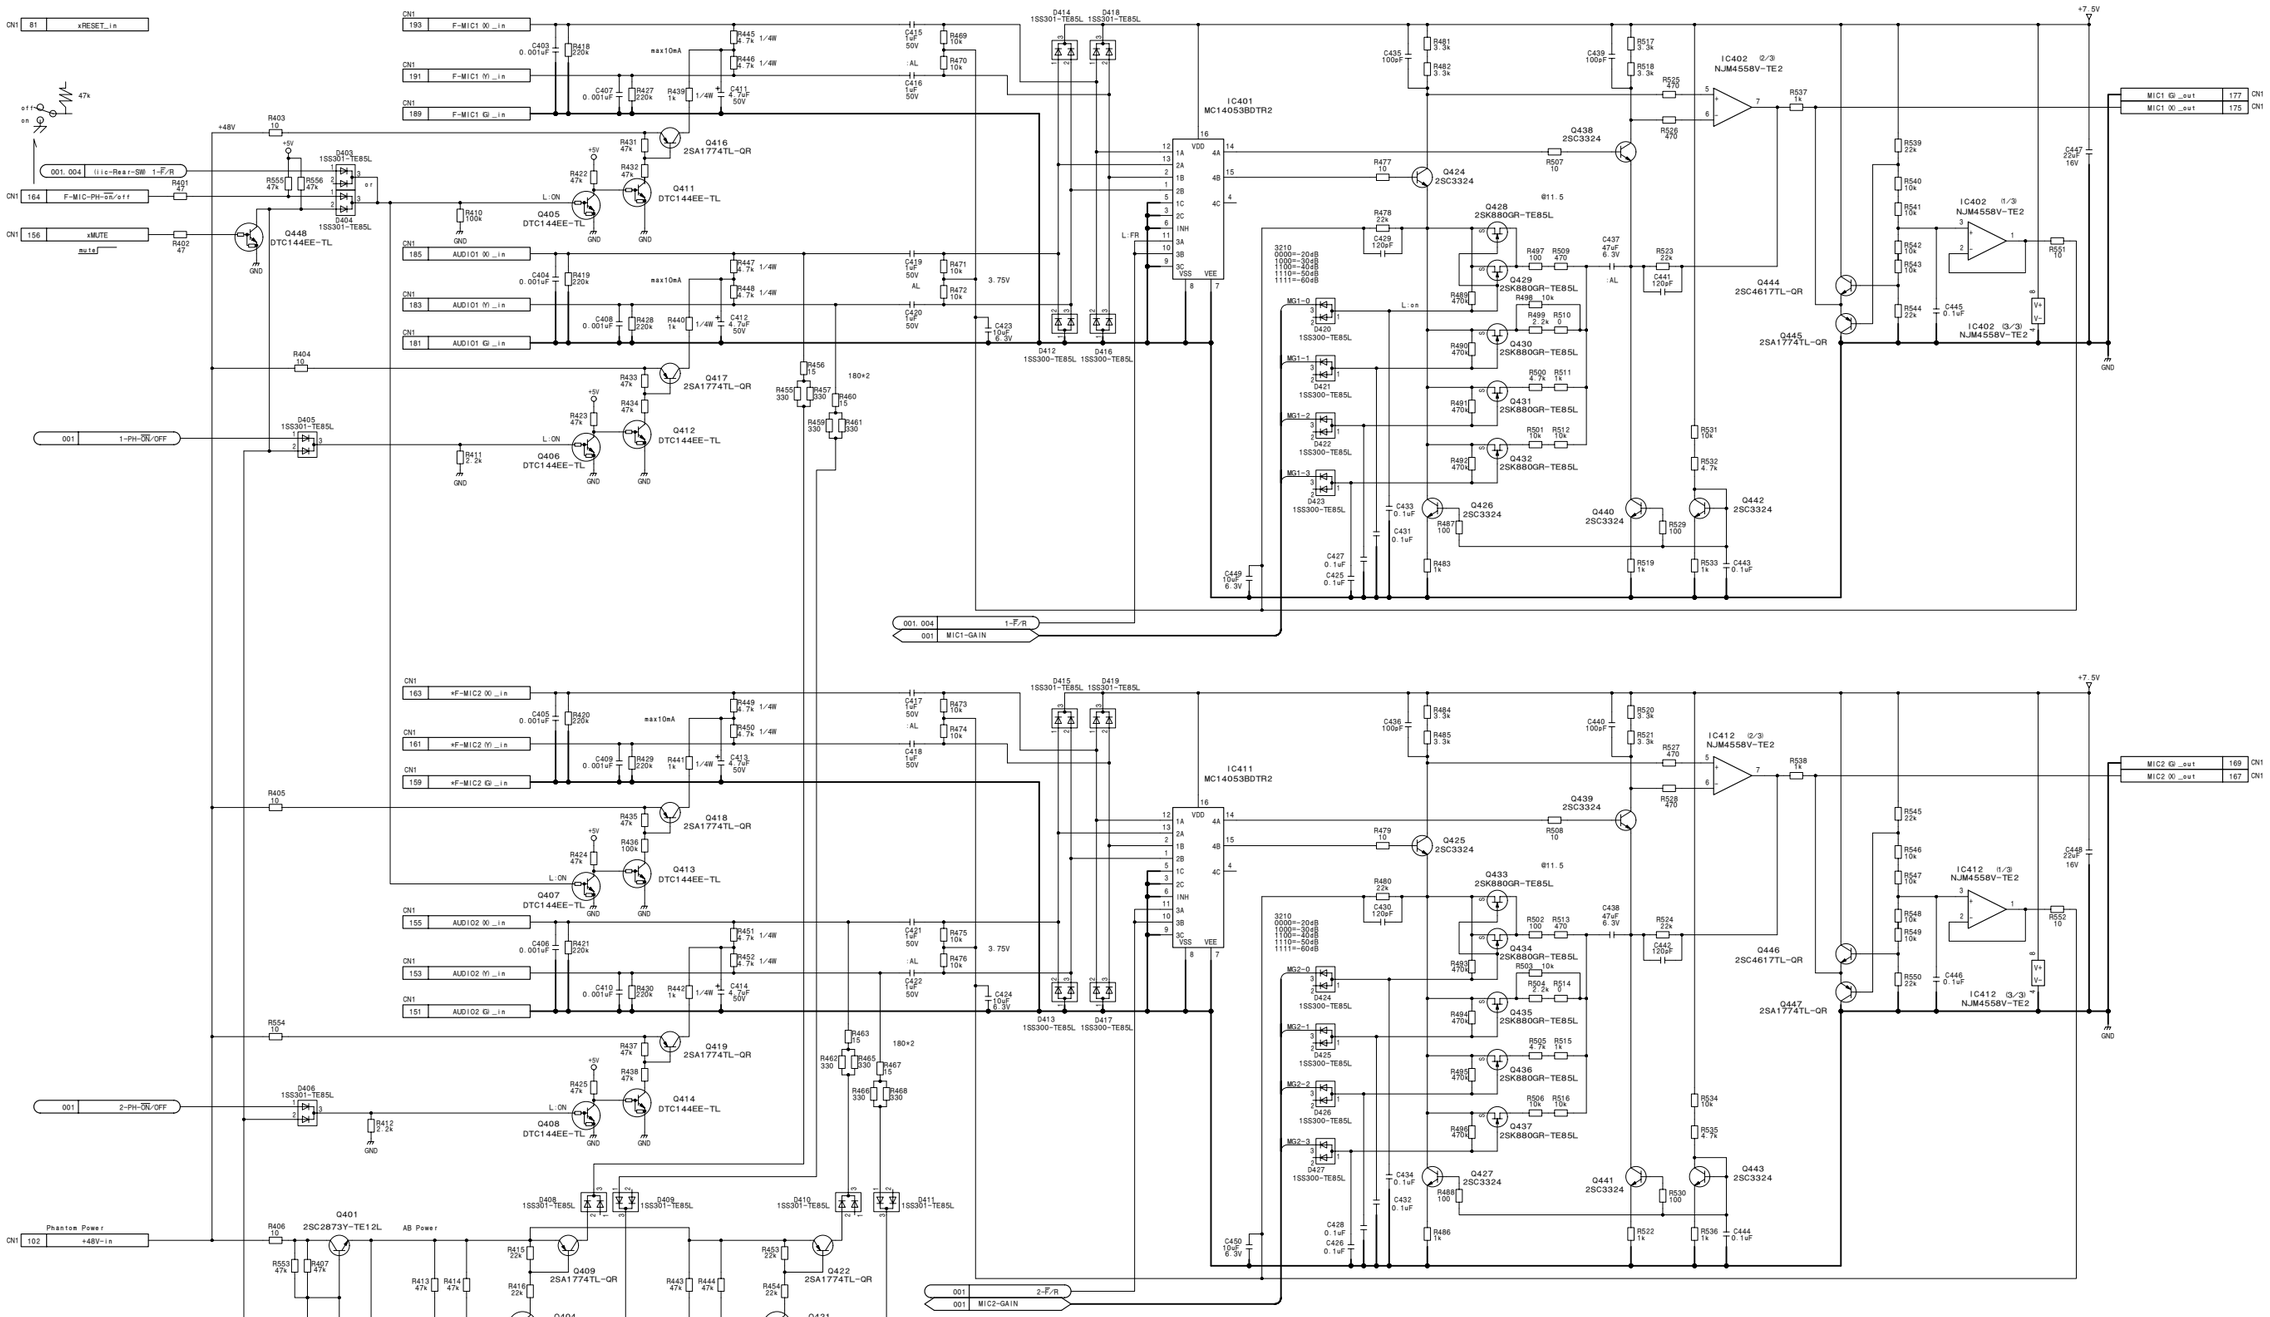


AU-298 (4/4)
BOARD NO. 1-865-933-12
HDC-1500_AU-298_012_4

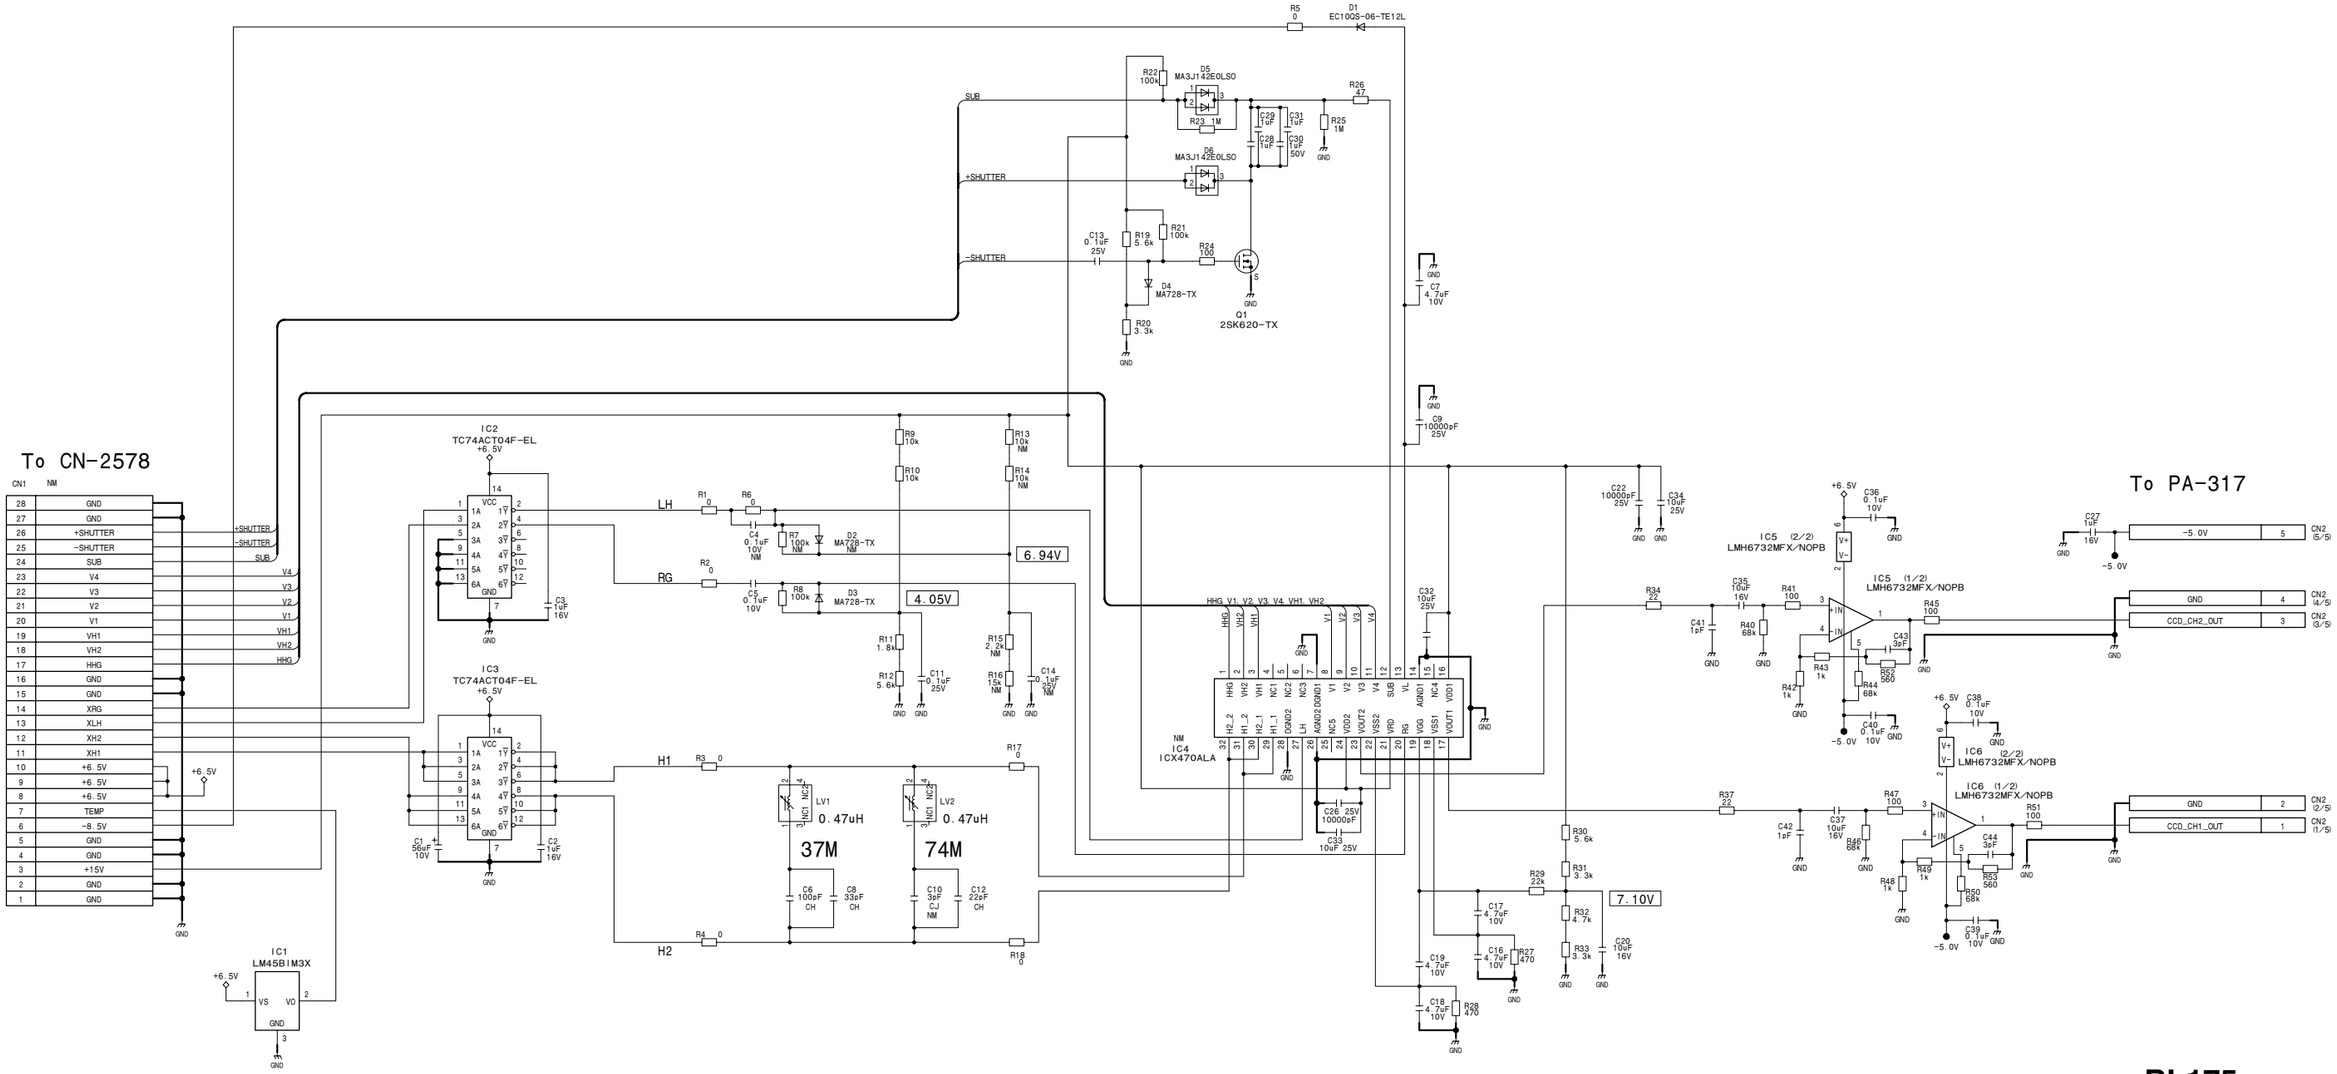


BI-175
BOARD NO. 1-868-173-11
HDC-1500_BI-175_011_1

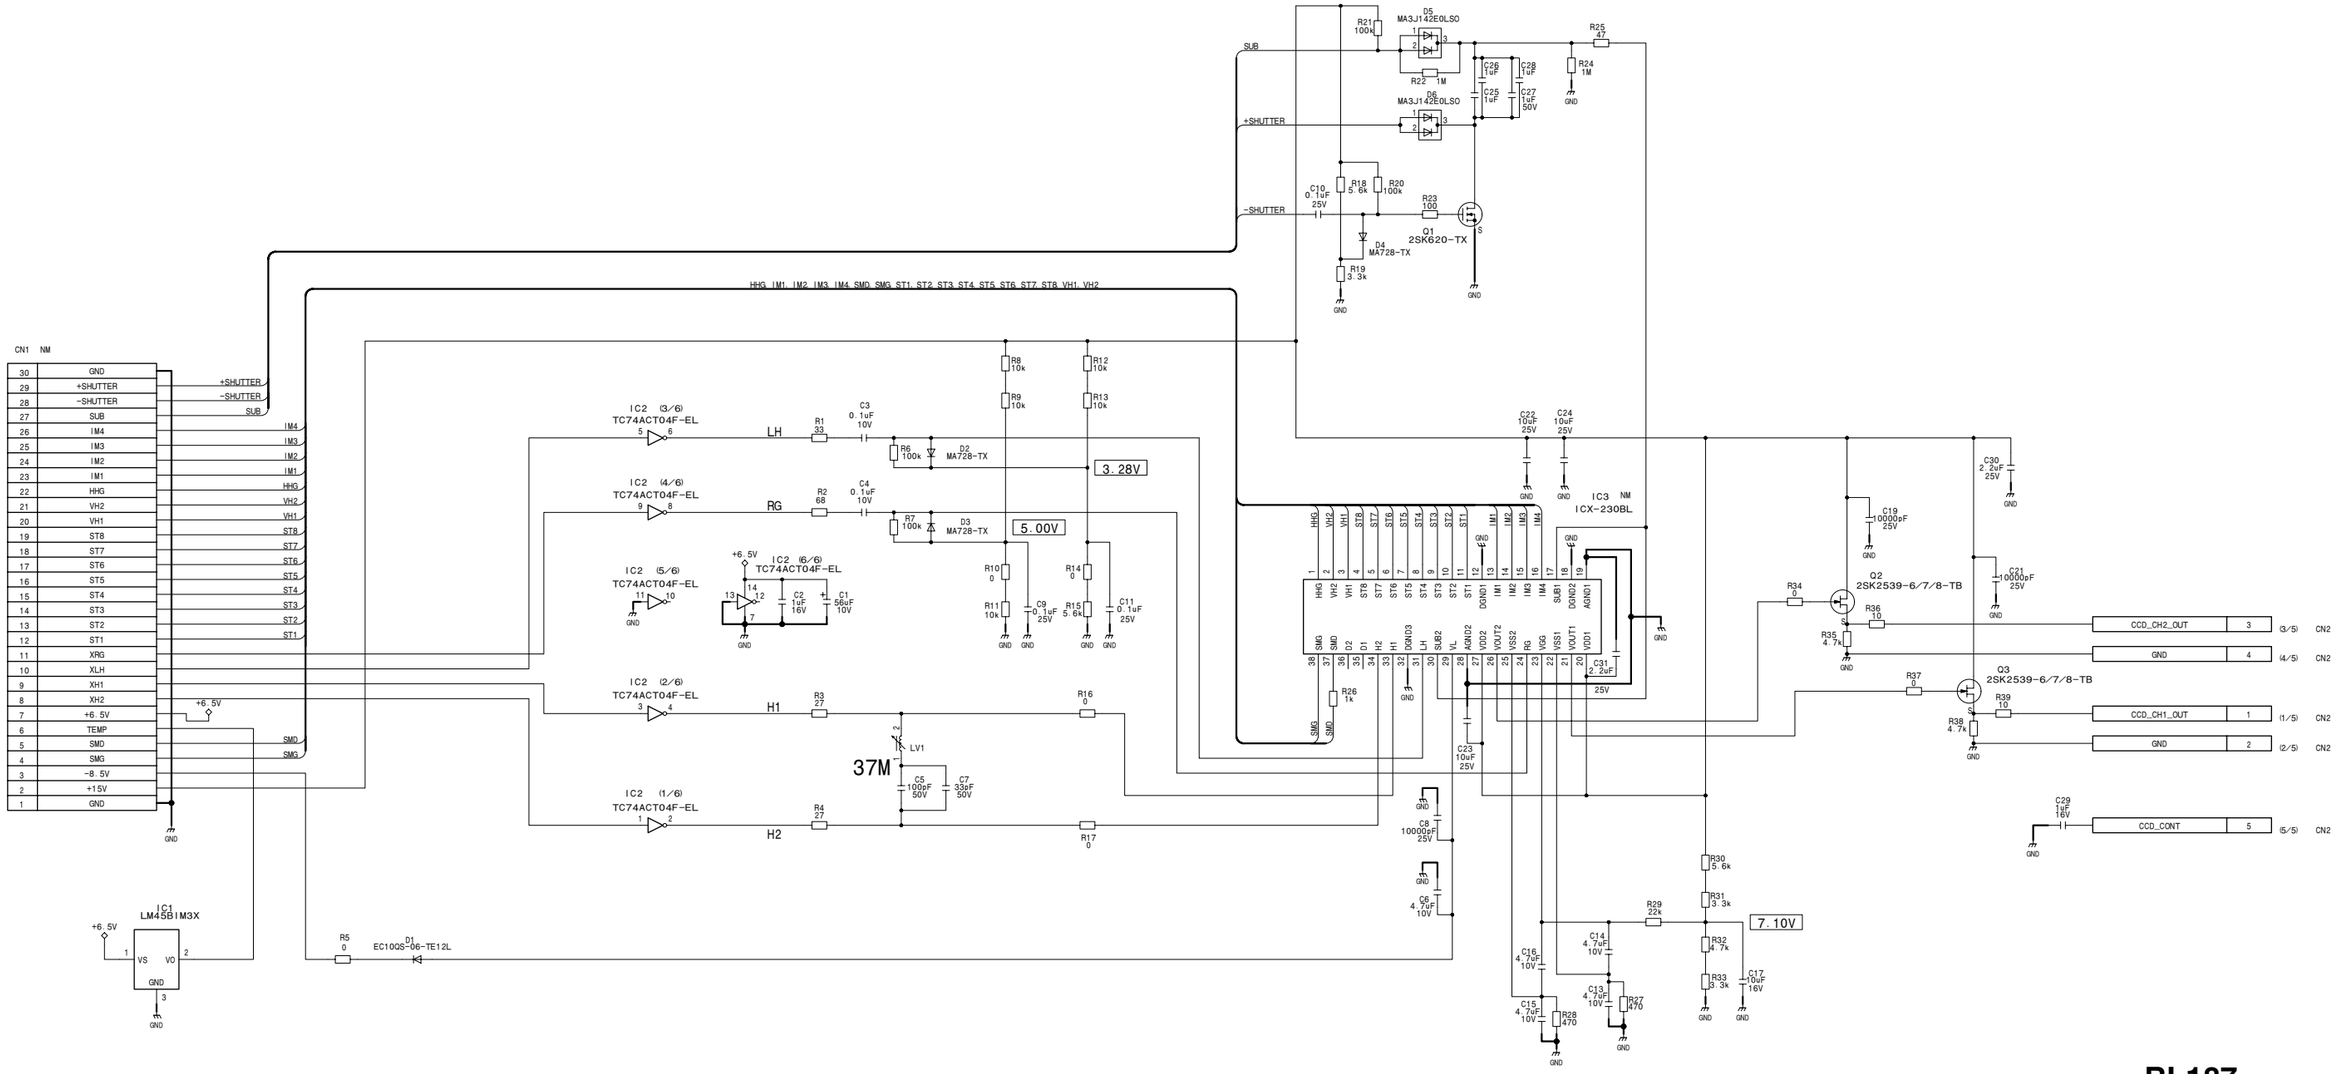


BI-187
BOARD NO. 1-865-963-11
HDC-1600_BI-187_011_1

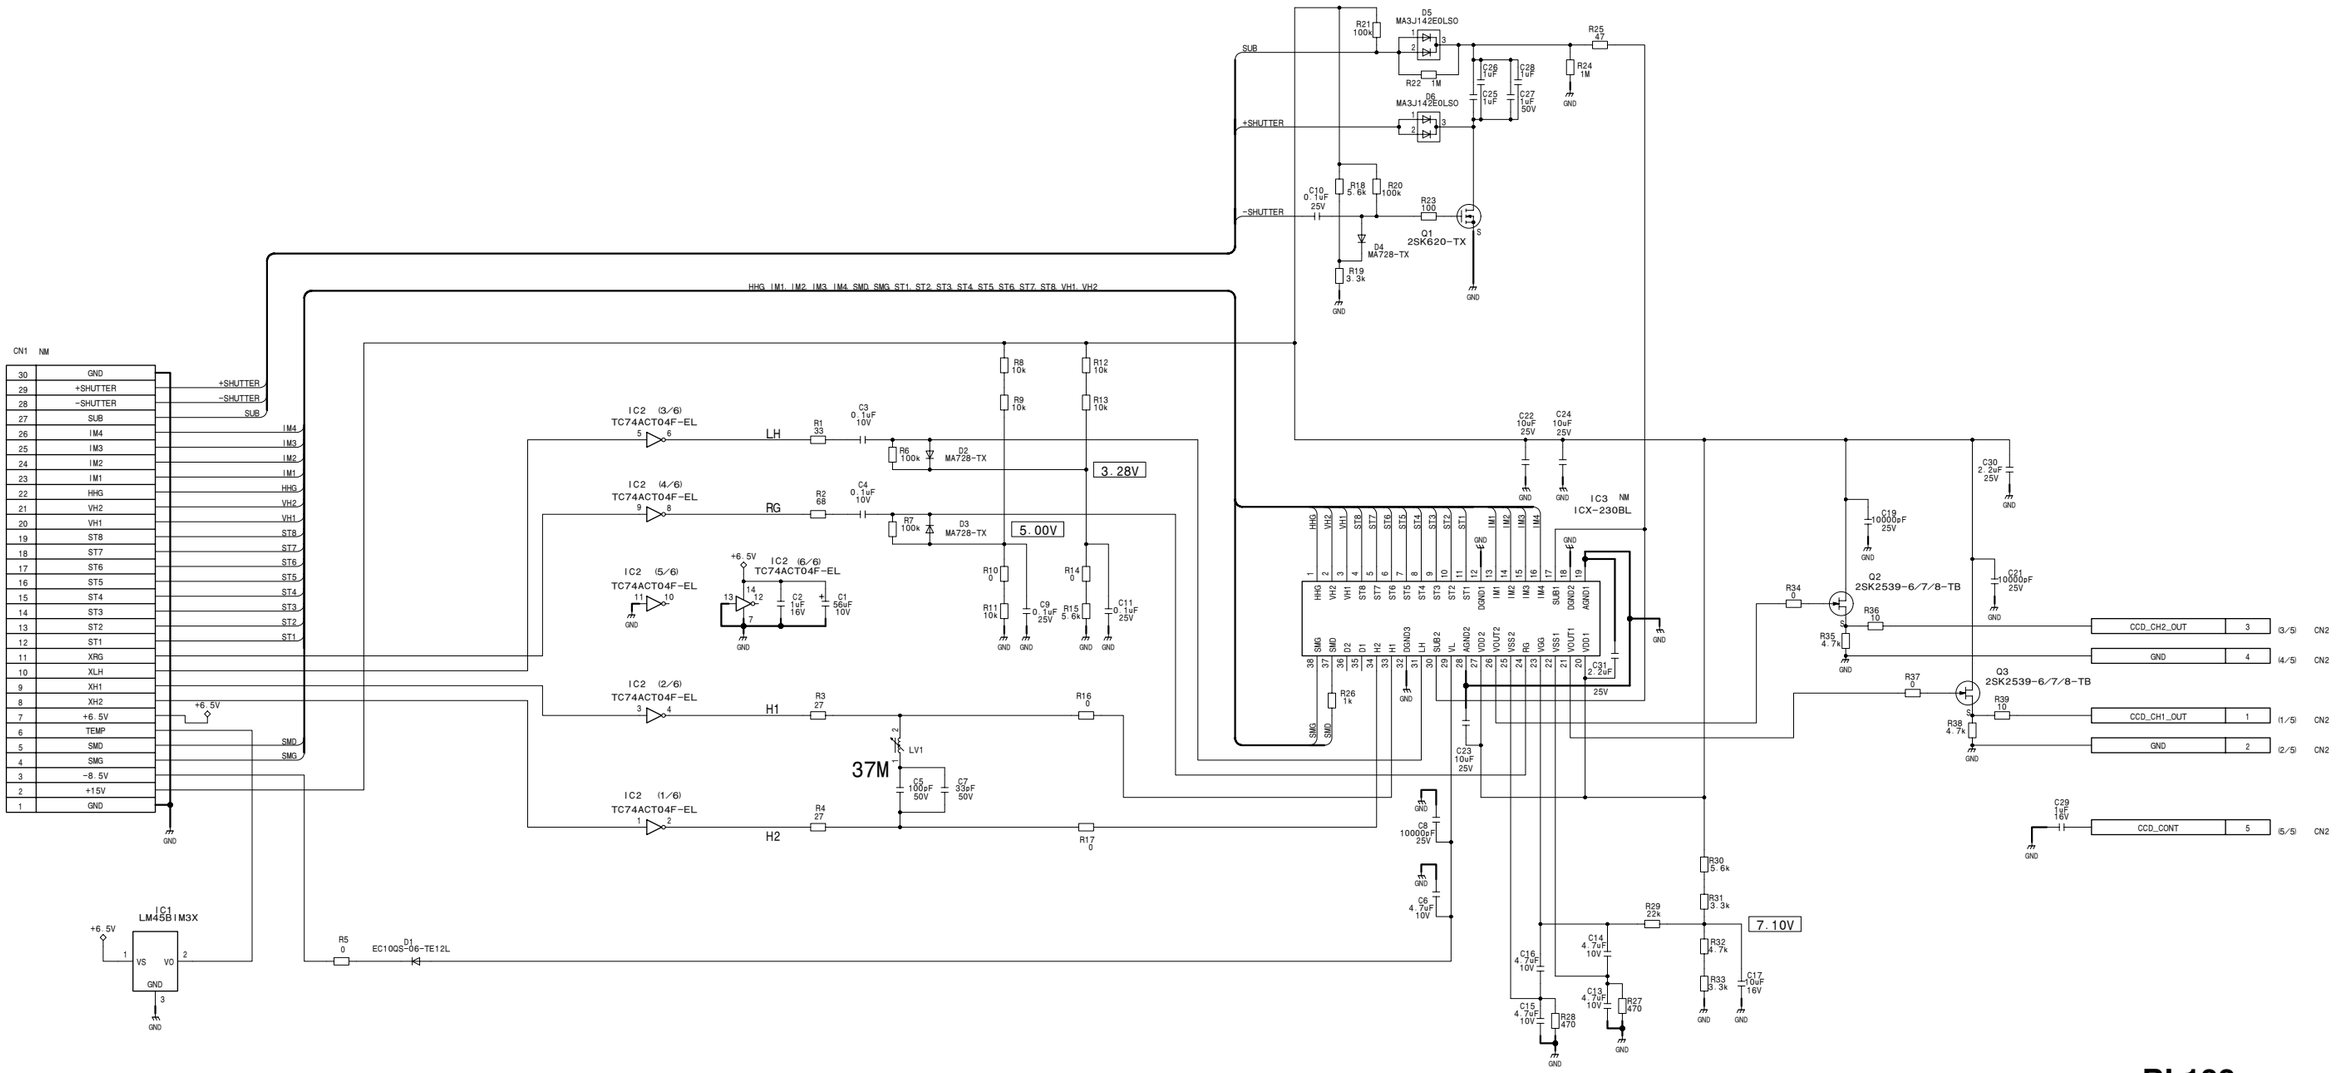

BI-188
BOARD NO. 1-865-964-11
HDC-1600_BI-188_011_1

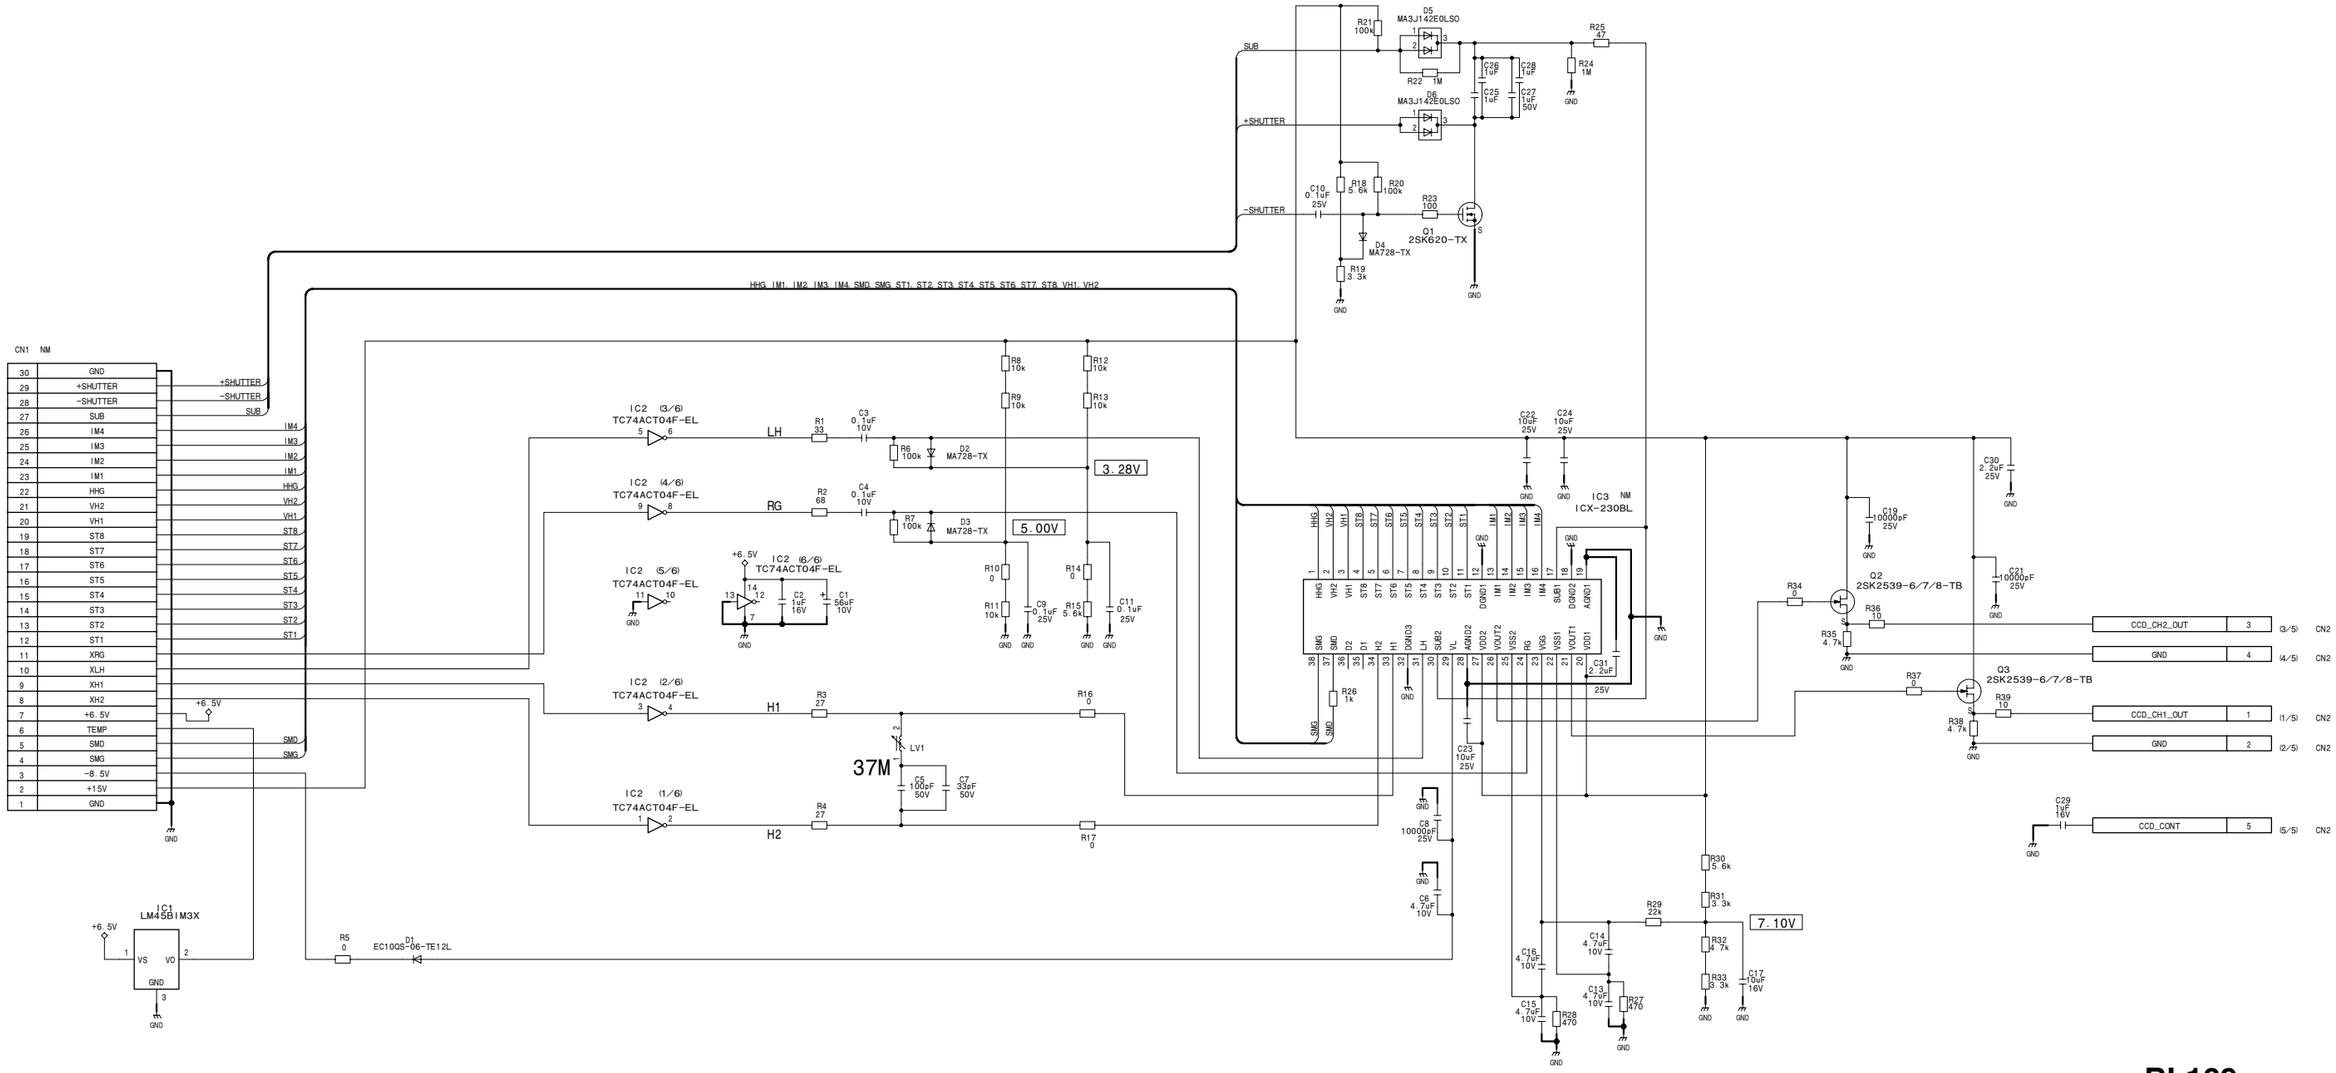

BI-189
BOARD NO. 1-865-965-11
HDC-1600_BI-189_011_1

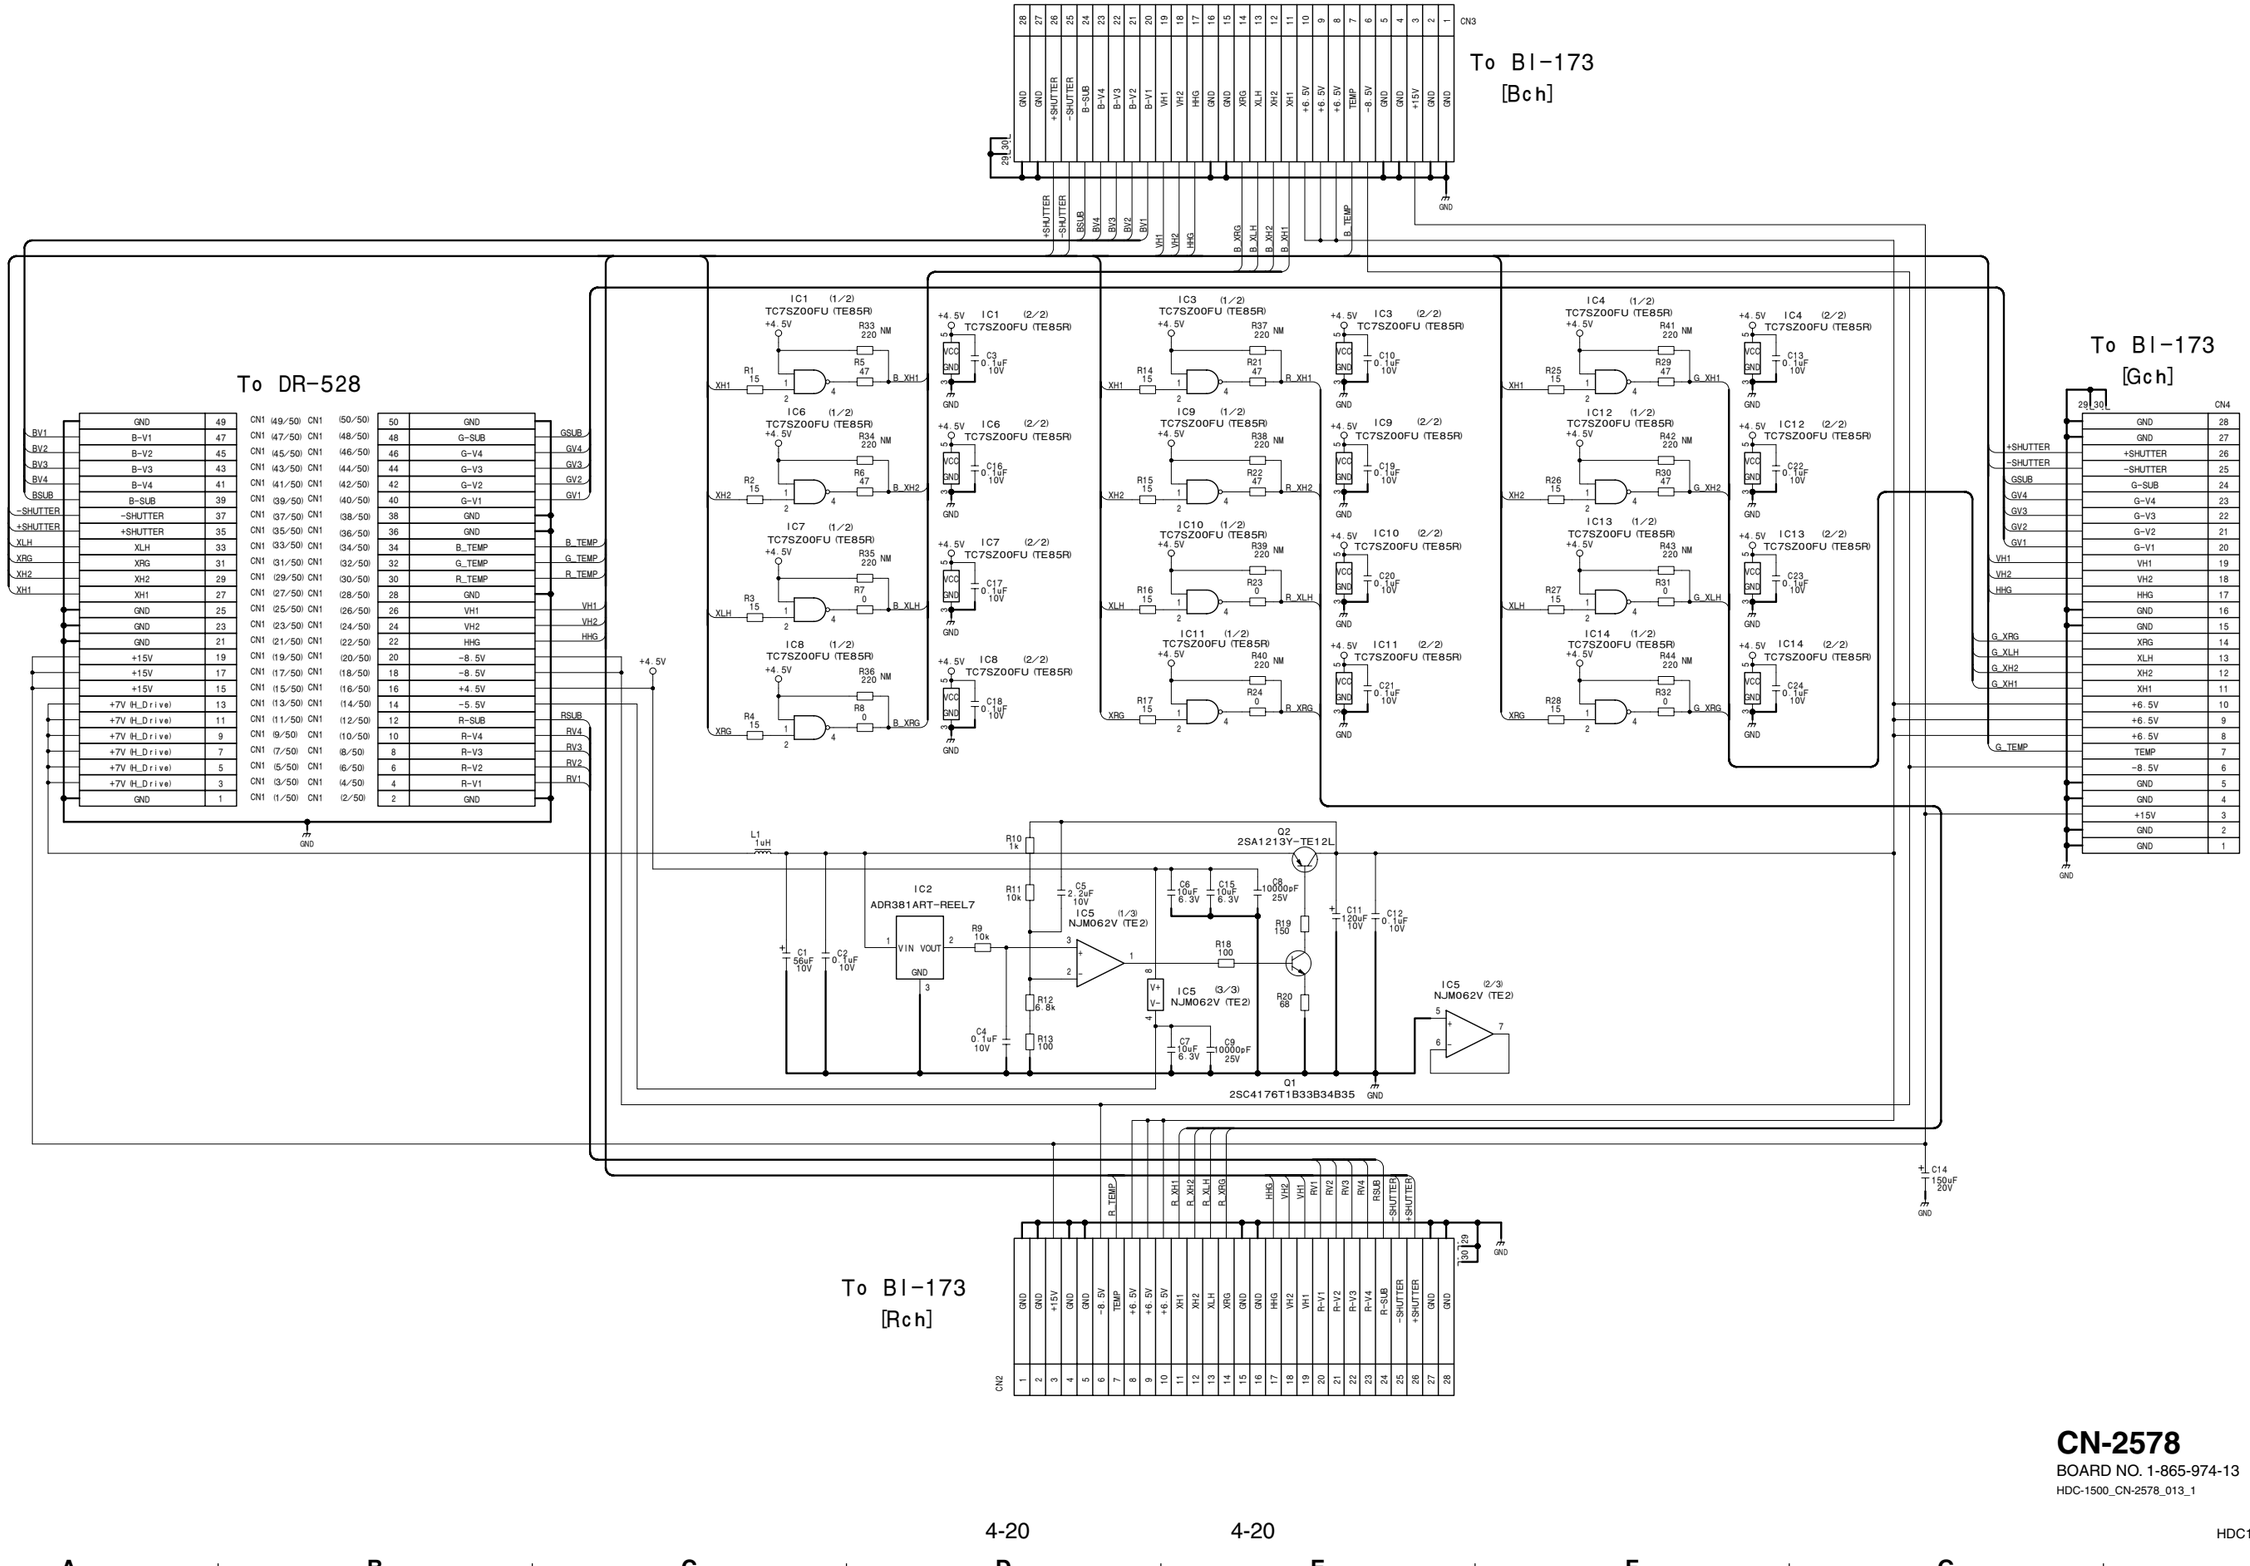

CN-2578

BOARD NO. 1-865-974-13


HDC-1500_CN-2578_013_1

To DR-528

To CHU (MB-1059)

100pin/ST/Plug

To PA-317

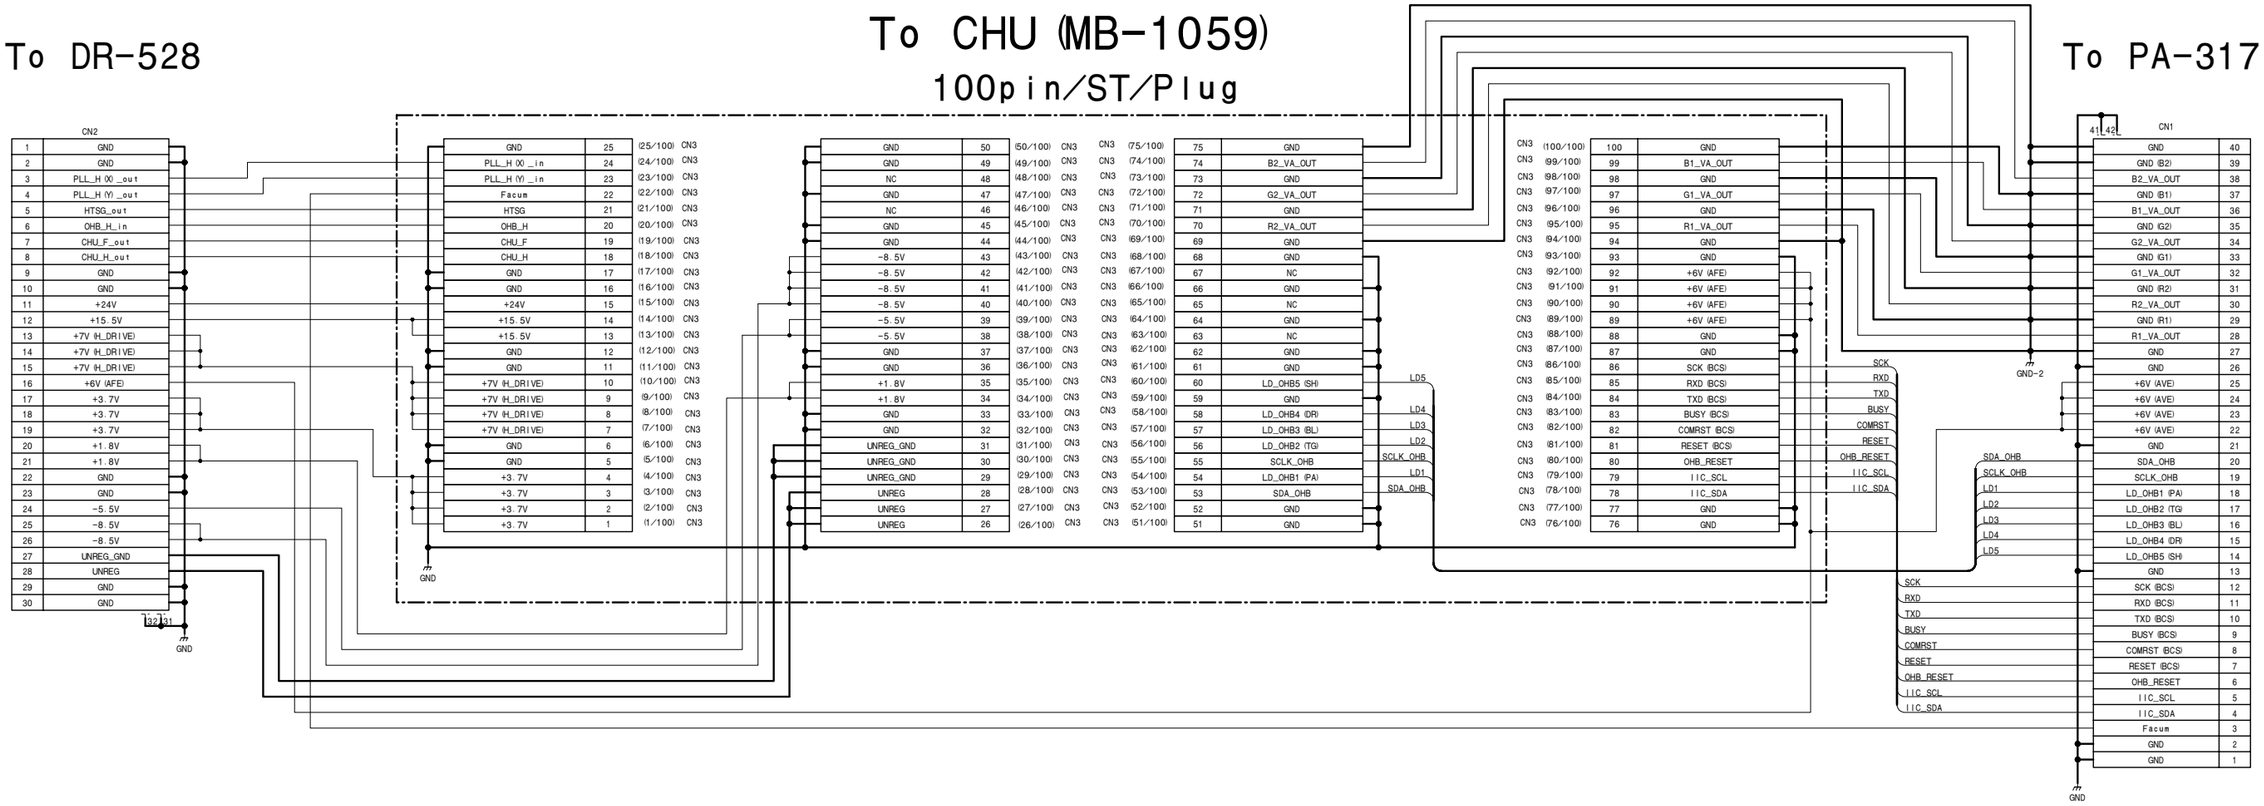


CN-2579

BOARD NO. 1-865-975-12, 21

HDC-1500_CN-2579_012_1


CN-2602, CN-2603/2603B
SUFFIX: -11 **SUFFIX: -11, 12**

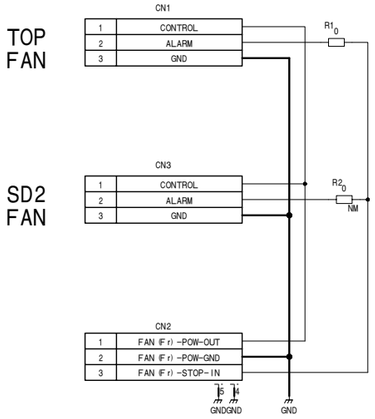

CN-2602

BOARD NO. 1-867-467-11

HDC-1000_CN-2602_011_1

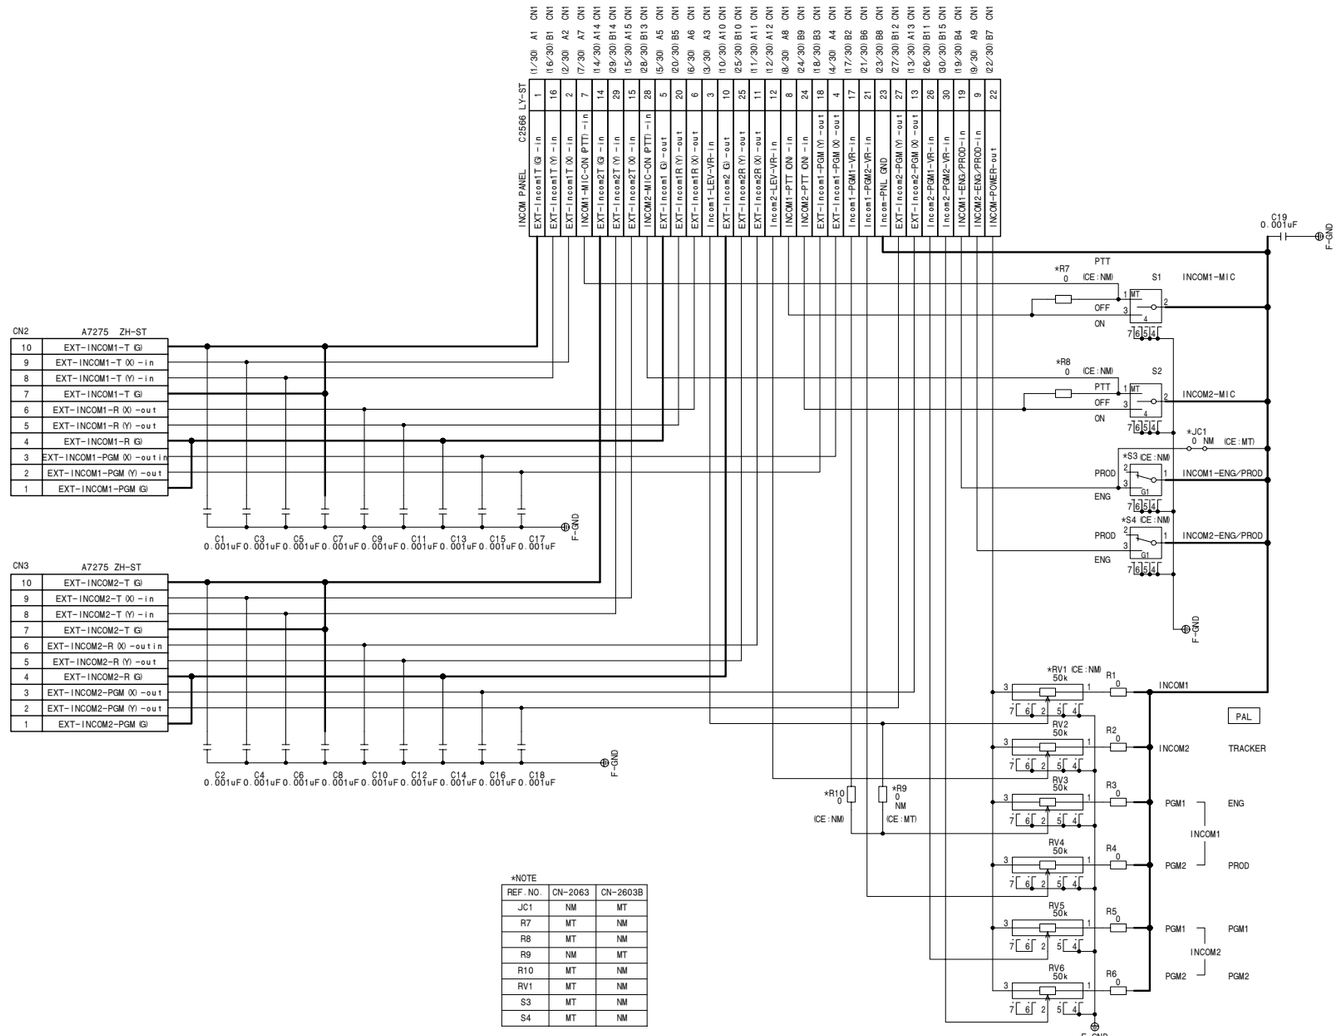

*NOTE


REF. NO.	CN-2063	CN-2603B
JC1	NM	MT
R7	MT	NM
R8	MT	NM
R9	NM	MT
R10	MT	NM
RV1	MT	NM
S3	MT	NM
S4	MT	NM


CN-2603/2603B

BOARD NO. 1-867-456-11, 12

HDC-1000_CN-2603_012_1

CN-2604, CN-2605
SUFFIX: -11, 12 SUFFIX: -11

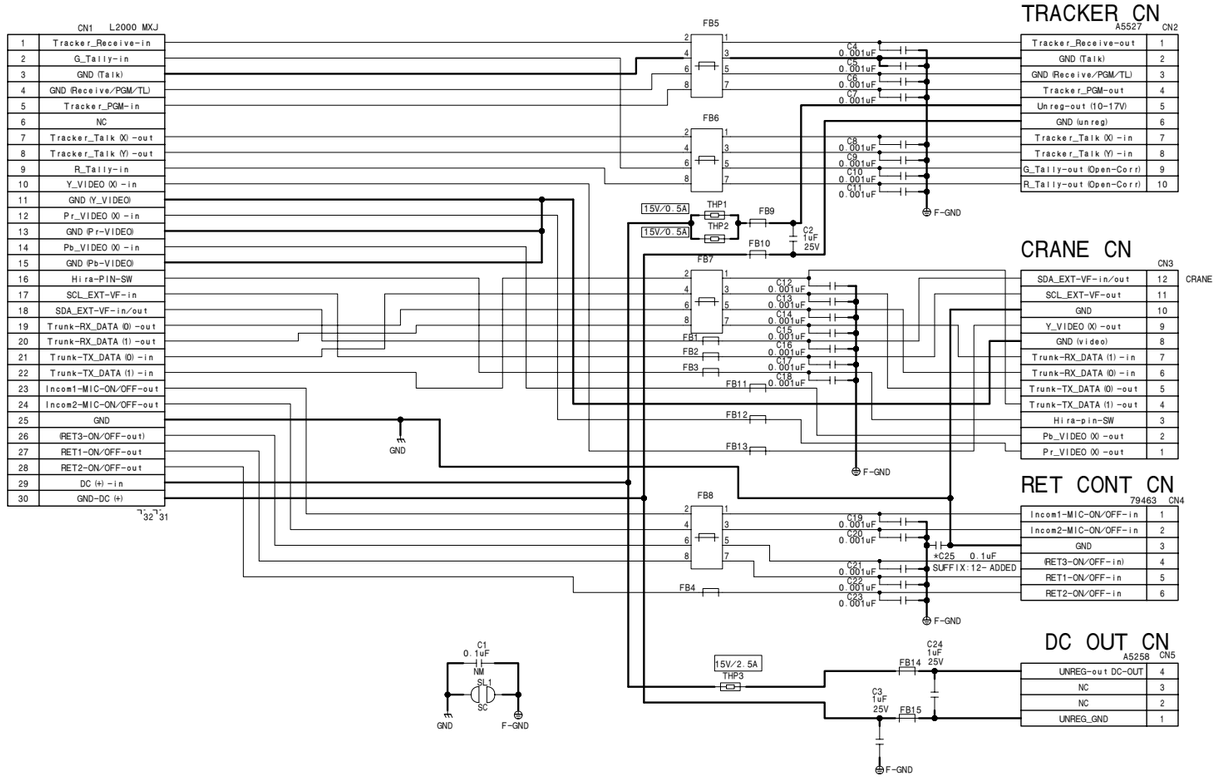


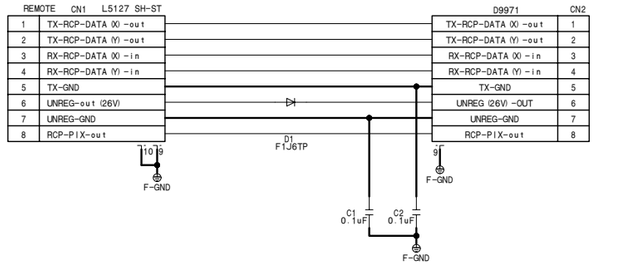

CN-2605
BOARD NO. 1-867-458-11
HDC-1000_CN-2605_011_1

CN-2604
BOARD NO. 1-867-457-11, 12
HDC-1000_CN-2604_012_1


CN-2606, CN-2607, CN-2608
SUFFIX: -11 SUFFIX: -11 SUFFIX: -11

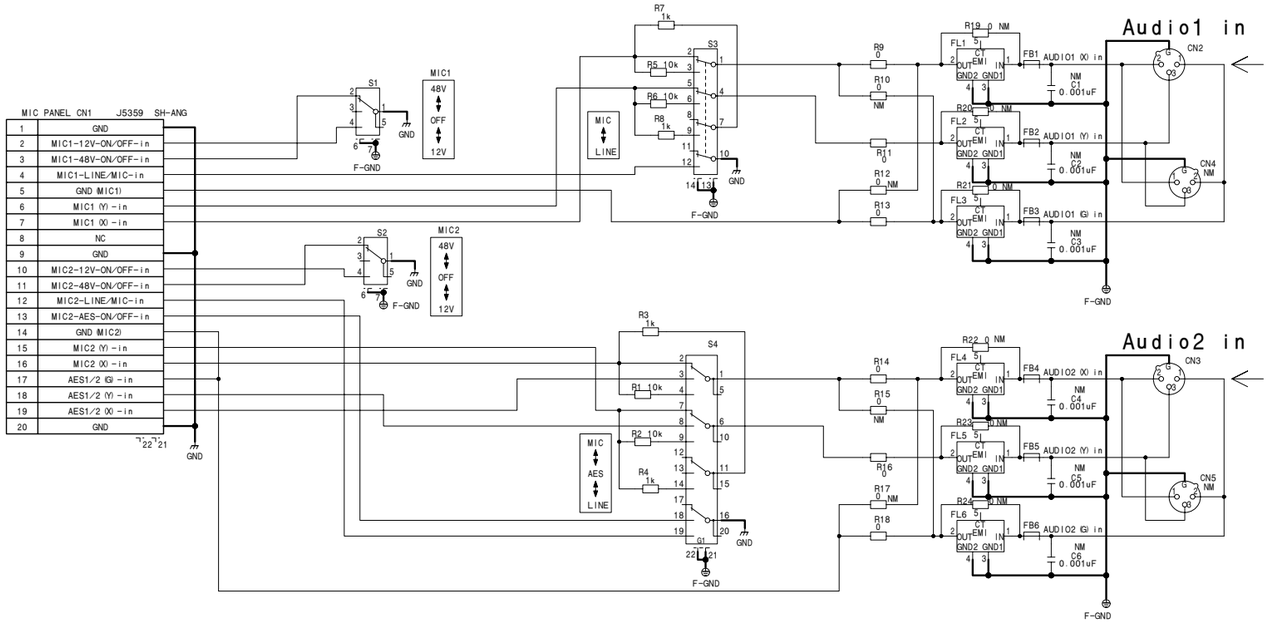

CN-2606

BOARD NO. 1-867-459-11


HDC-1000_CN-2606_011_1

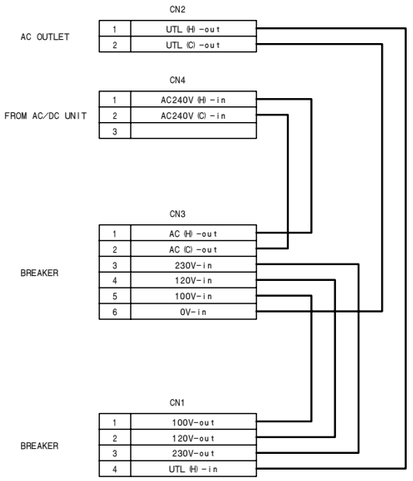

CN-2607

BOARD NO. 1-867-460-11

HDC-1000_CN-2607_011_1

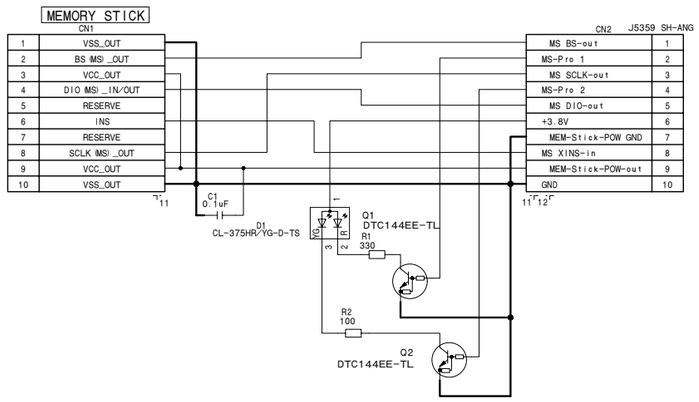

CN-2608


BOARD NO. 1-867-408-11

HDC-1000_CN-2608_011_1

4-24

CN-2609, CN-2614/2614B
SUFFIX: -11, 21 SUFFIX: -11, 12

OHB_100P (F) -CN (0-195-434-01)

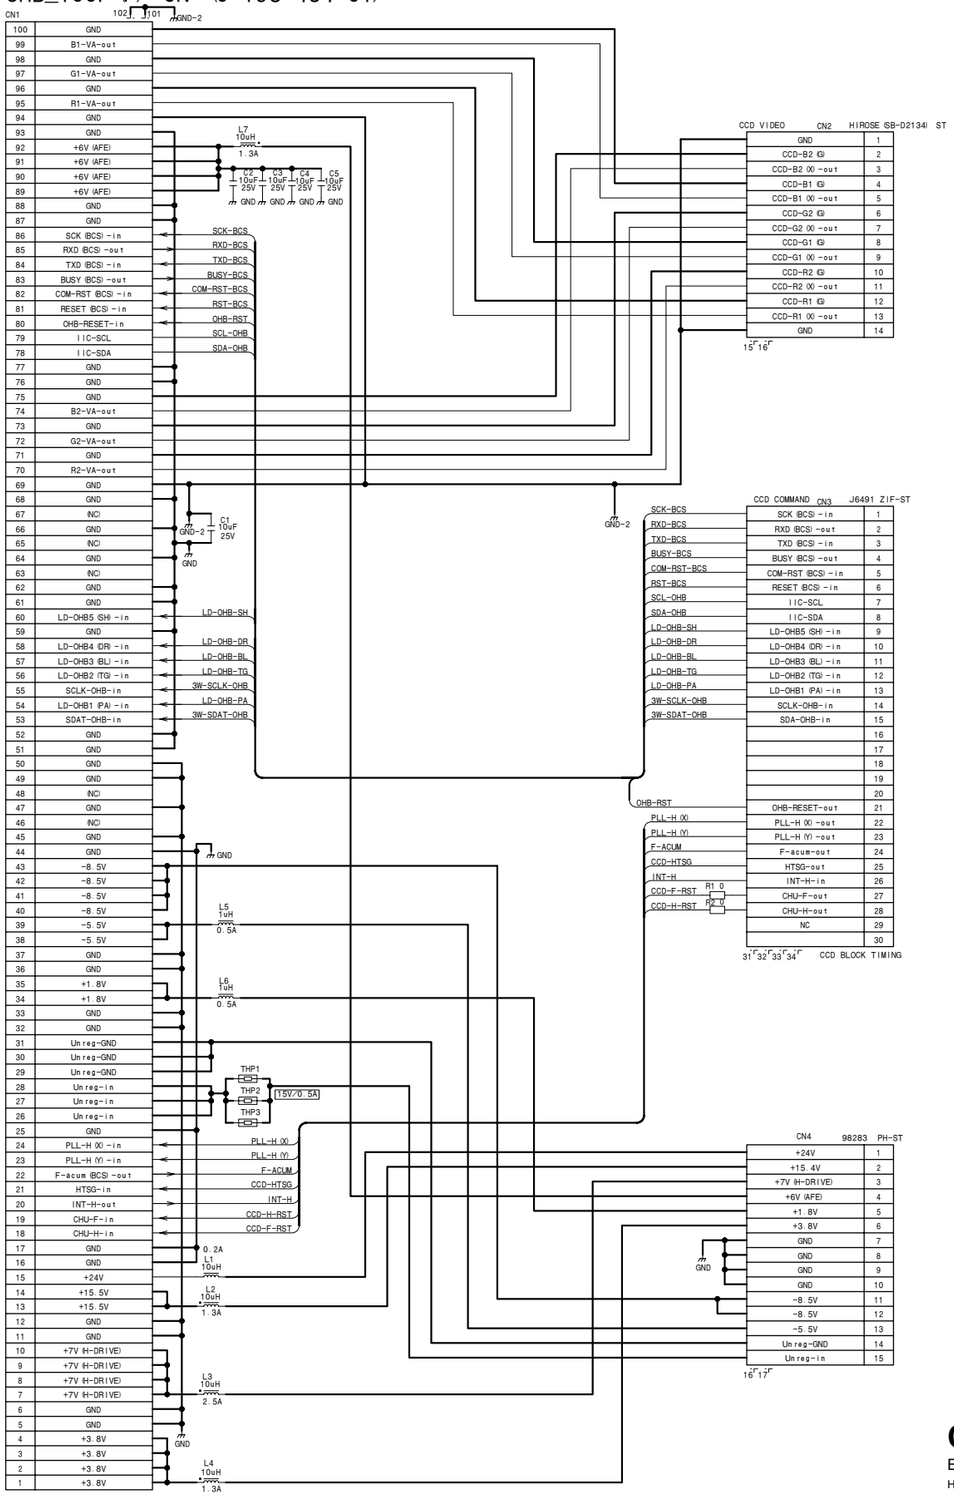


CN-2609

BOARD NO. 1-867-409-11, 21

HDC-1000_CN-2609_011_1

VF-CN

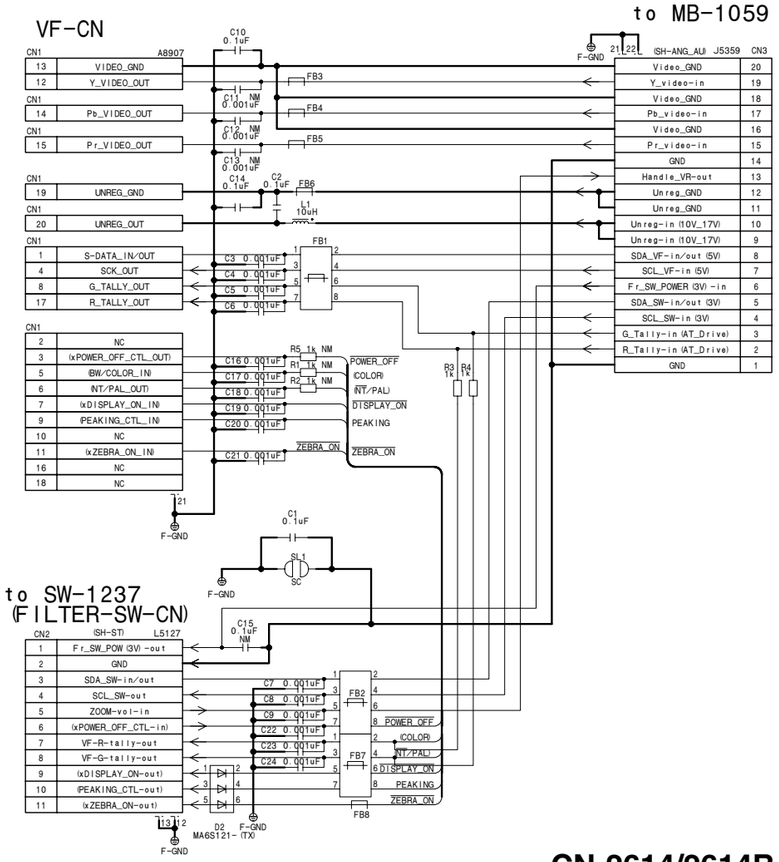


CN-2614/2614B

BOARD NO. 1-869-827-11
1-865-935-12

HDC-1500_CN-2614_001_1


CN-2615, CN-2616
SUFFIX: -12 SUFFIX: -12

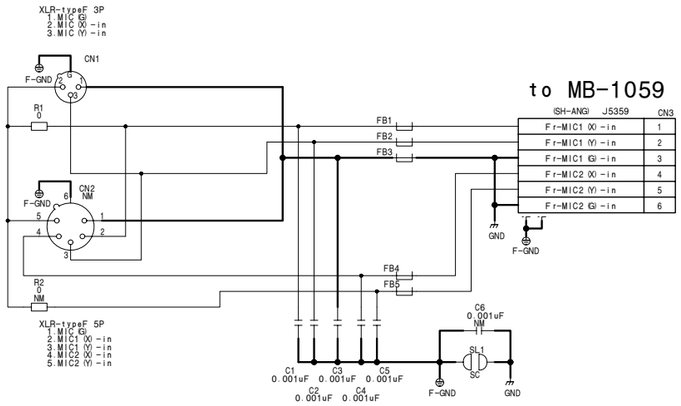

CN-2615

BOARD NO. 1-865-936-12


HDC-1500_CN-2615_001_1

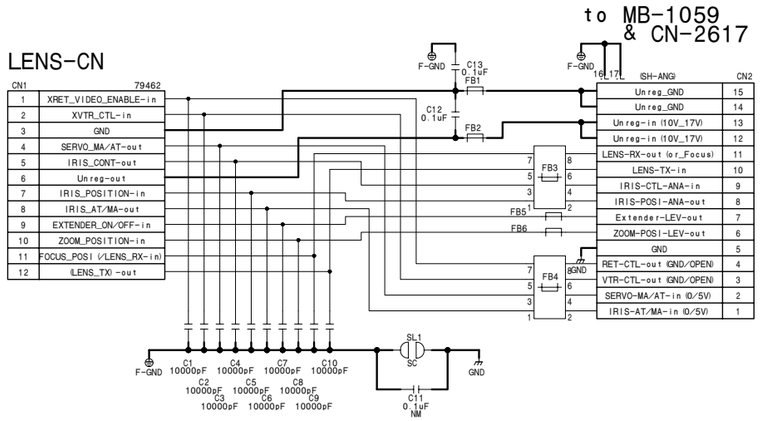

CN-2616

BOARD NO. 1-865-937-12

HDC-1500_CN-2616_001_1

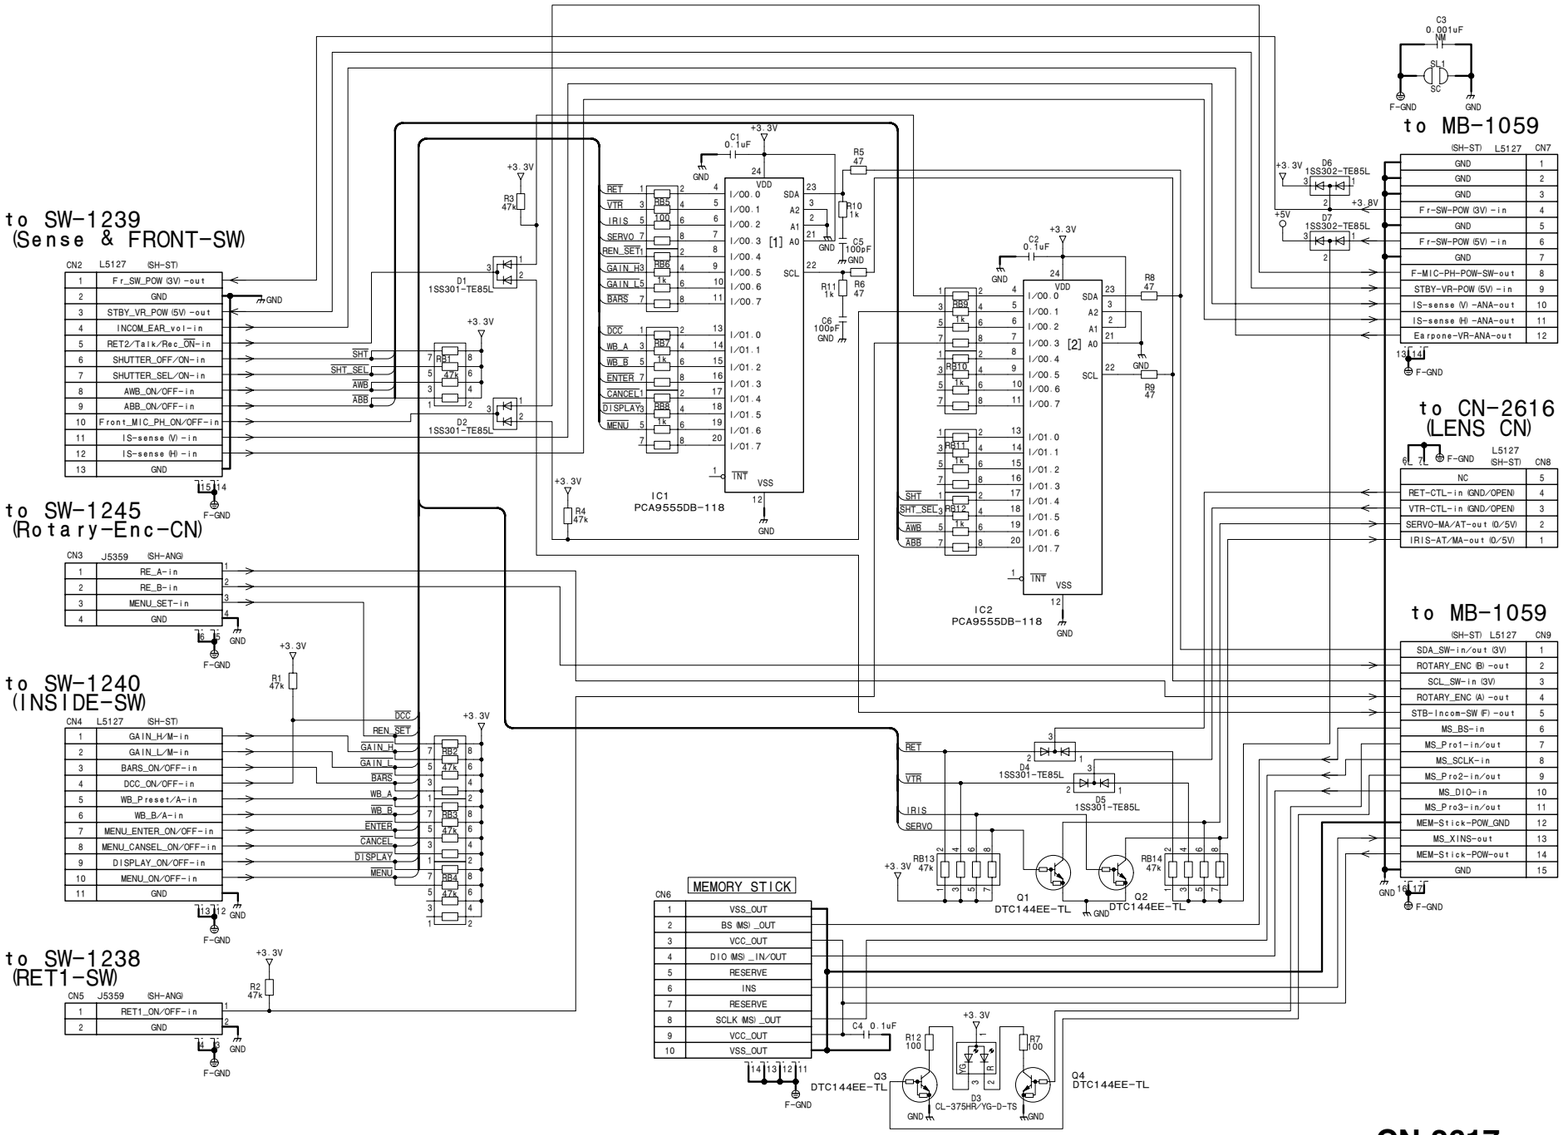

CN-2617

BOARD NO. 1-865-938-13


HDC-1500_CN-2617_013_1

CN-2618, CN-2619
SUFFIX: -12 SUFFIX: -12, 21

1 : Talk-Y
2 : Talk-X
3 : GND
4 : Receive
5 : PGM

to SW-1273
(Incom-Panel)

CN1	L5127 (SH-ST)
10	EXT-INCOM-T (G)
9	EXT-INCOM-T (X) -out
8	EXT-INCOM-T (Y) -out
7	EXT-INCOM-T (G)
6	EXT-INCOM-R (X) -in
5	EXT-INCOM-R (Y) -in
4	EXT-INCOM-R (G)
3	EXT-INCOM-PGM (X) -in
2	EXT-INCOM-PGM (Y) -in
1	EXT-INCOM-PGM (G)

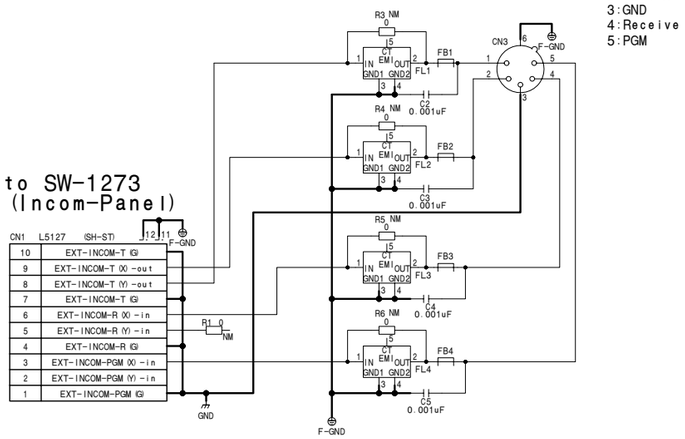

CN-2618


BOARD NO. 1-865-939-12

HDC-1500_CN-2618_001_1

to MB-1059

J6491 (FPC-0.5-ST) CN1


1	Trunk-RX1-out
2	Trunk-RX2-out
3	Trunk-TX1-in
4	Trunk-TX2-in
5	EXT_GND
6	SDA_EXT-VF-in/out (5V)
7	SCL_EXT-VF-in (5V)
8	Tally (R) -Tracker-in
9	Tally (G) -Tracker-in
10	Tracker_GND
11	Tracker-Talk (X) -out
12	Tracker-Talk (Y) -out
13	Tracker-Talk (G) -out
14	Hira-PIN1
15	Tracker-Recieve (X) -in
16	Tracker-R/P-GND
17	Tracker-PGM (X) -in
18	Tracker-GND
19	Earphone (L) -in
20	Earphone (G) -in
21	Earphone (R) -in
22	EXT-Ref/RET-SW-out
23	Crane-Pr (X) -in
24	Crane-GND
25	Crane-Pb (X) -in
26	Crane-GND
27	Crane-Y (X) -in
28	Crane-GND
29	Analog (G) -in
30	Analog (X) -in
31	RET3-CTL-out
32	Incom1 (CN) -ON/OFF-out
33	Incom2 (CN) -ON/OFF-out
34	RET1-CTL-out
35	RET2-CTL-out
36	EXT-GND
37	Prompter (X) -in
38	Prompter (G) -in
39	EXT-Ref (X) -out
40	EXT-Ref (G) -out

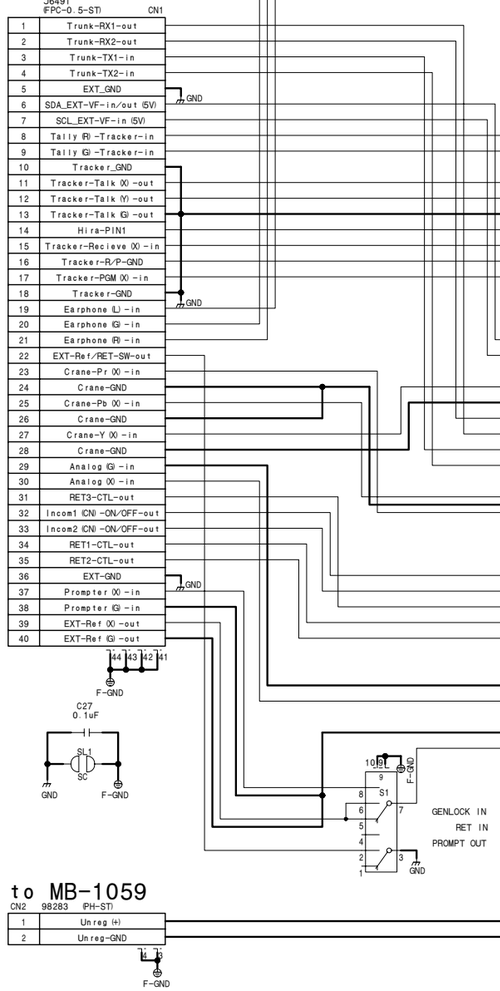

to MB-1059

CN2 98283 (PH-ST)

1	Unreg (+)
2	Unreg-GND

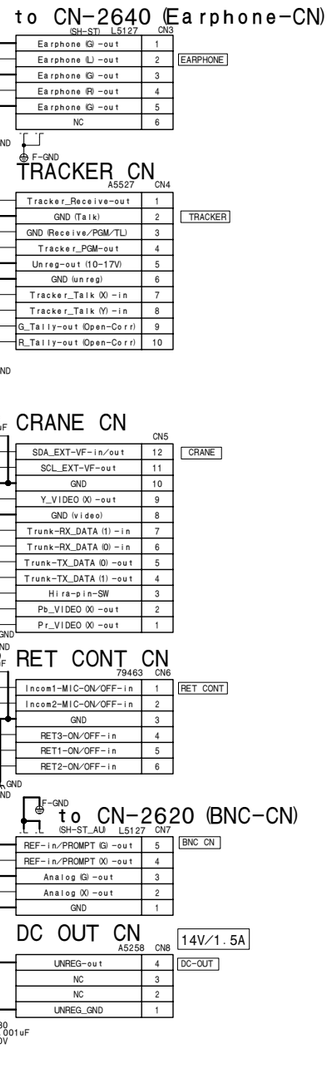

CN-2619


BOARD NO. 1-865-940-12, 21

HDC-1500_CN-2619_001_1

CN-2620, CN-2621
SUFFIX: -12 SUFFIX: -13, 21

to CN-2619
(Crane/Tracker/RET-CN)

CN3	J5359 (SH-ANG_AU)
1	GND
2	Analog (X) -out
3	Analog (G) -out
4	REF (X) -in/PROMPT (X) -out
5	REF (G) -in/PROMPT (G) -out

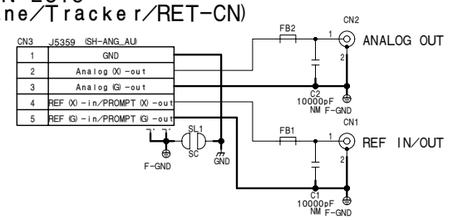

CN-2620

BOARD NO. 1-865-941-12

HDC-1500_CN-2620_001_1

to MB-1059


CN1	J6491 (FPC-0.5-ANG)
1	RCP-POW (+) -in
2	RCP-POW (+) -in
3	NC
4	RCP-POW (-) -in
5	RCP-POW (-) -in
6	RCP-TX (Y) -in
7	RCP-TX (X) -in
8	RCP-RX (Y) -out
9	RCP-RX (X) -out
10	NC
11	CN-Bord-POW (3V) -in
12	NC
13	CN-Bord_GND
14	SDA_SW (R) -in/out
15	SCL_SW (R) -in
16	STBY-Incom1 (MIC) -ON/OFF
17	EXT-AES1/2 (X) -out
18	EXT-AES1/2 (Y) -out
19	EXT-AES1/2 (G) -out
20	CN-Bord_GND
21	EXT-MIC2 (X) -out
22	EXT-MIC2 (Y) -out
23	EXT-MIC2 (G) -out
24	EXT-MIC1 (X) -out
25	EXT-MIC1 (Y) -out
26	EXT-MIC1 (G) -out
27	CN-Bord_GND
28	RM-MON1 (X) -in
29	RM-MON1 (G) -in
30	RET3-CTL-in
31	EXT-Ref/RET-SW-in
32	Incom1 (CN) -ON/OFF-in
33	Incom2 (CN) -ON/OFF-in
34	RET1-CTL-in
35	RET2-CTL-in
36	CN-Bord_GND

to CN-2622
(RM/RCP-CN)

(SH-ANG_AU) J5359	CN3
TX_RCP_DATA (Y) -out	1
TX_RCP_DATA (X) -out	2
DATA_GND	3
RX_RCP_DATA (Y) -in	4
RX_RCP_DATA (X) -in	5
DATA_GND	6
RCP_POWER (+26V) -out	7
RCP_POWER (+26V) -out	8
RCP_POWER_GND	9
RCP_POWER_GND	10
VIDEO (X) -out	11
VIDEO (G) -out	12

from SW-1242
(MIC POW-SW)

CN2	D9510 (IL-WX-ST)
1	NC
2	NC
3	GND
4	MIC1-POWER_PH/OFF-in
5	MIC1-POWER_AB/OFF-in
6	MIC2-POWER_PH/OFF-in
7	MIC2-POWER_AB/OFF-in
8	GND
9	NC
10	NC

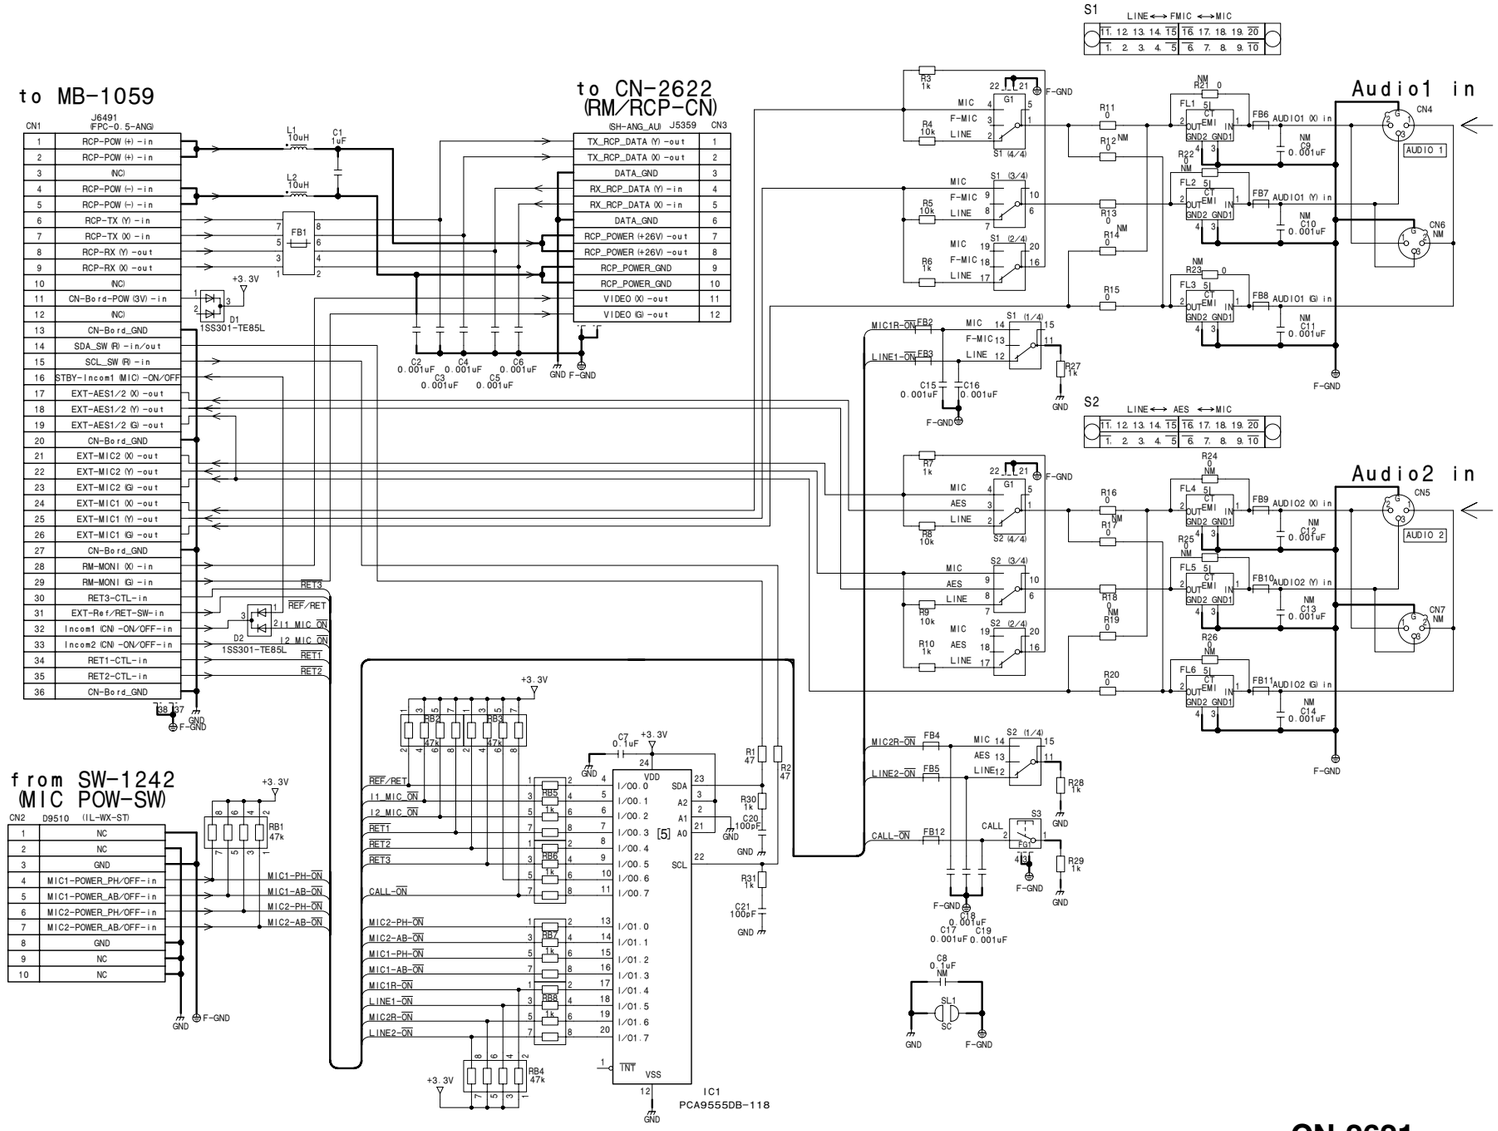


CN-2621

BOARD NO. 1-865-942-13, 21

HDC-1500_CN-2621_001_1


CN-2622, CN-2623, CN-2640, CN-2671
SUFFIX: -13 SUFFIX: -13 SUFFIX: -12 SUFFIX: -11

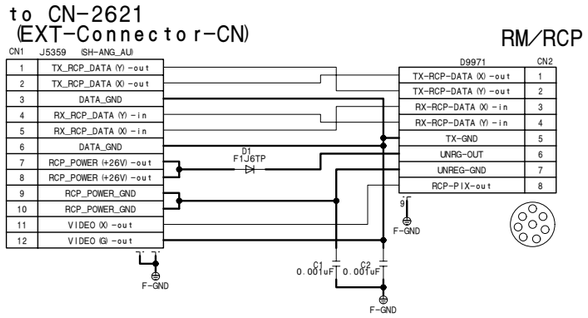

CN-2622

BOARD NO. 1-865-943-13


HDC-1500_CN-2622_013_1

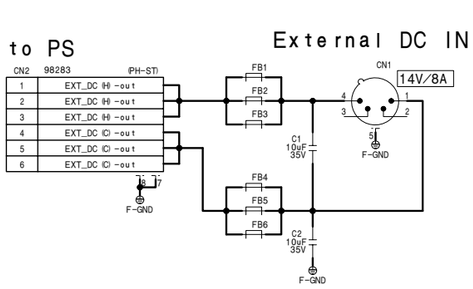

CN-2623

BOARD NO. 1-865-944-13


HDC-1500_CN-2623_001_1

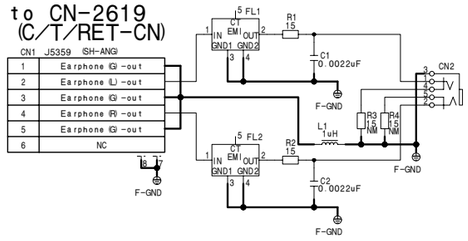

CN-2640

BOARD NO. 1-865-945-12


HDC-1500_CN-2640_001_1

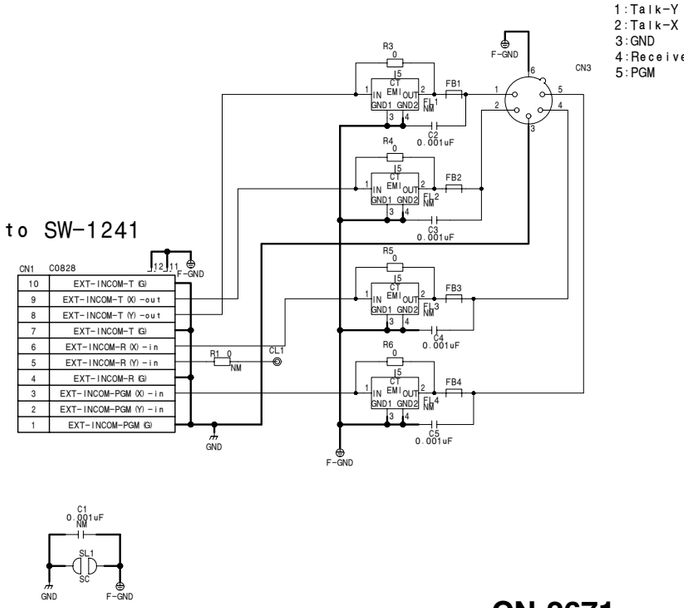

CN-2671

BOARD NO. 1-867-468-11

HDC-1000_CN-2671_011_1

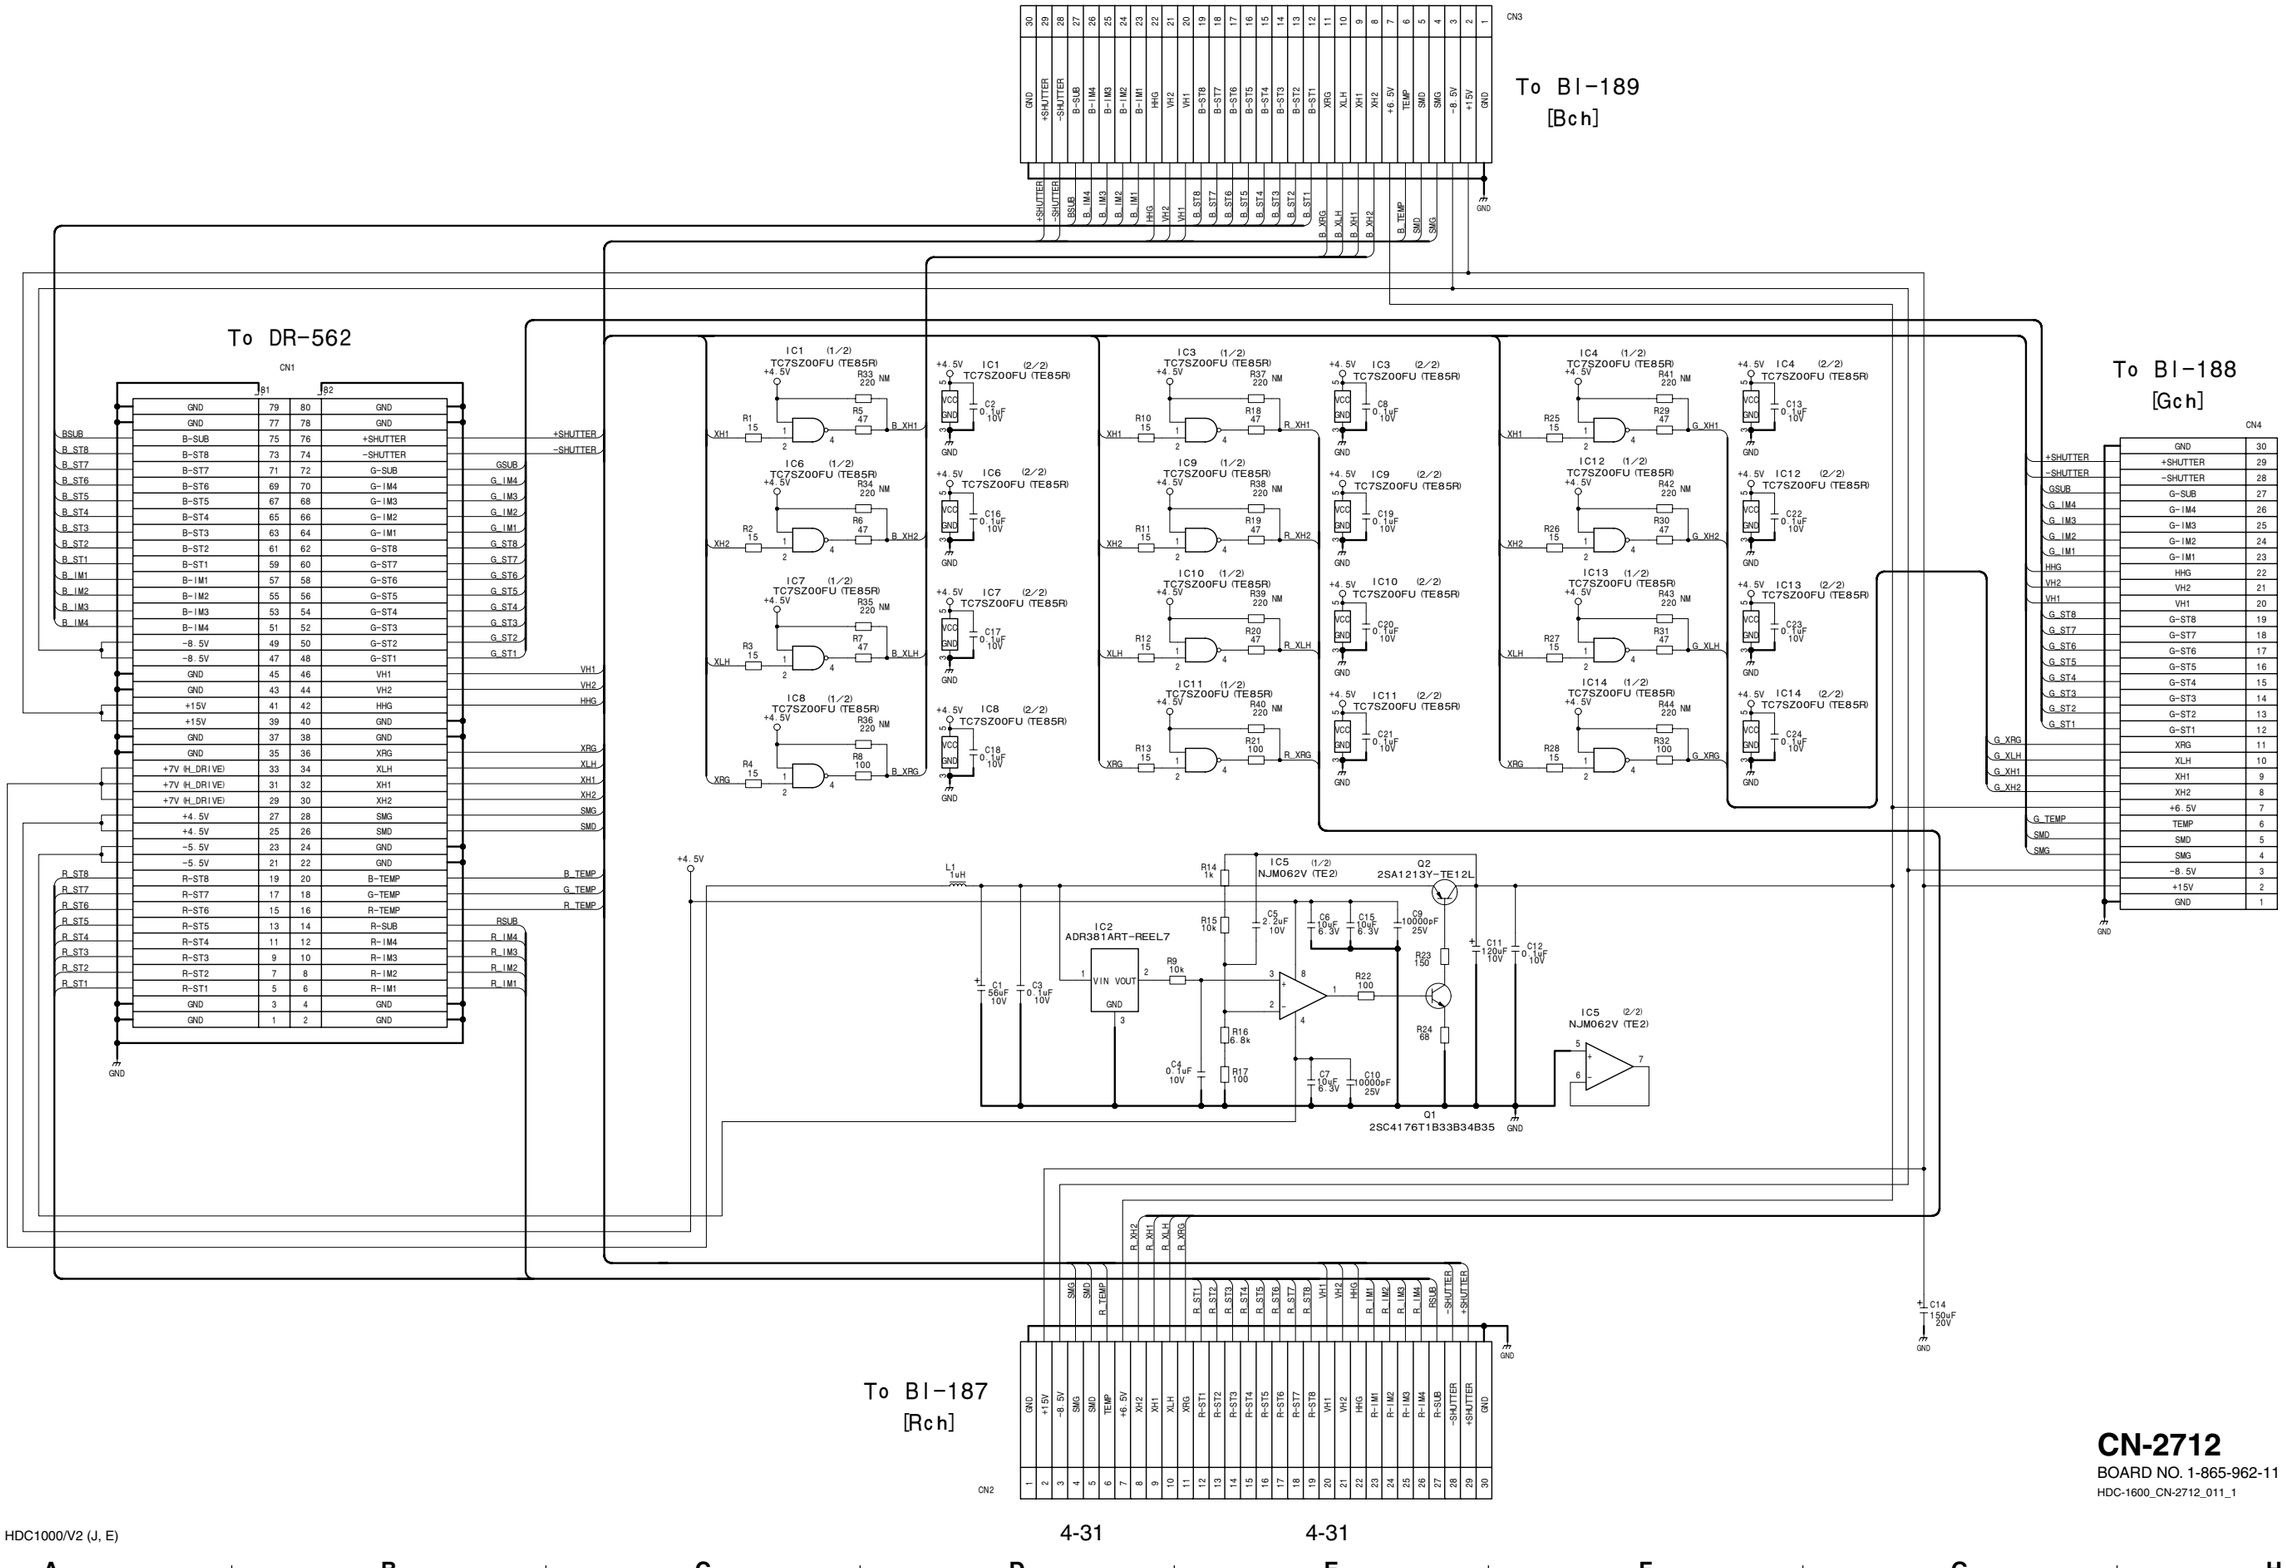


CN-2712
BOARD NO. 1-865-962-11
HDC-1600_CN-2712_011_1

To DR-562

To CHU (MB-1059)

100pin/ST/Plug

To PA-327

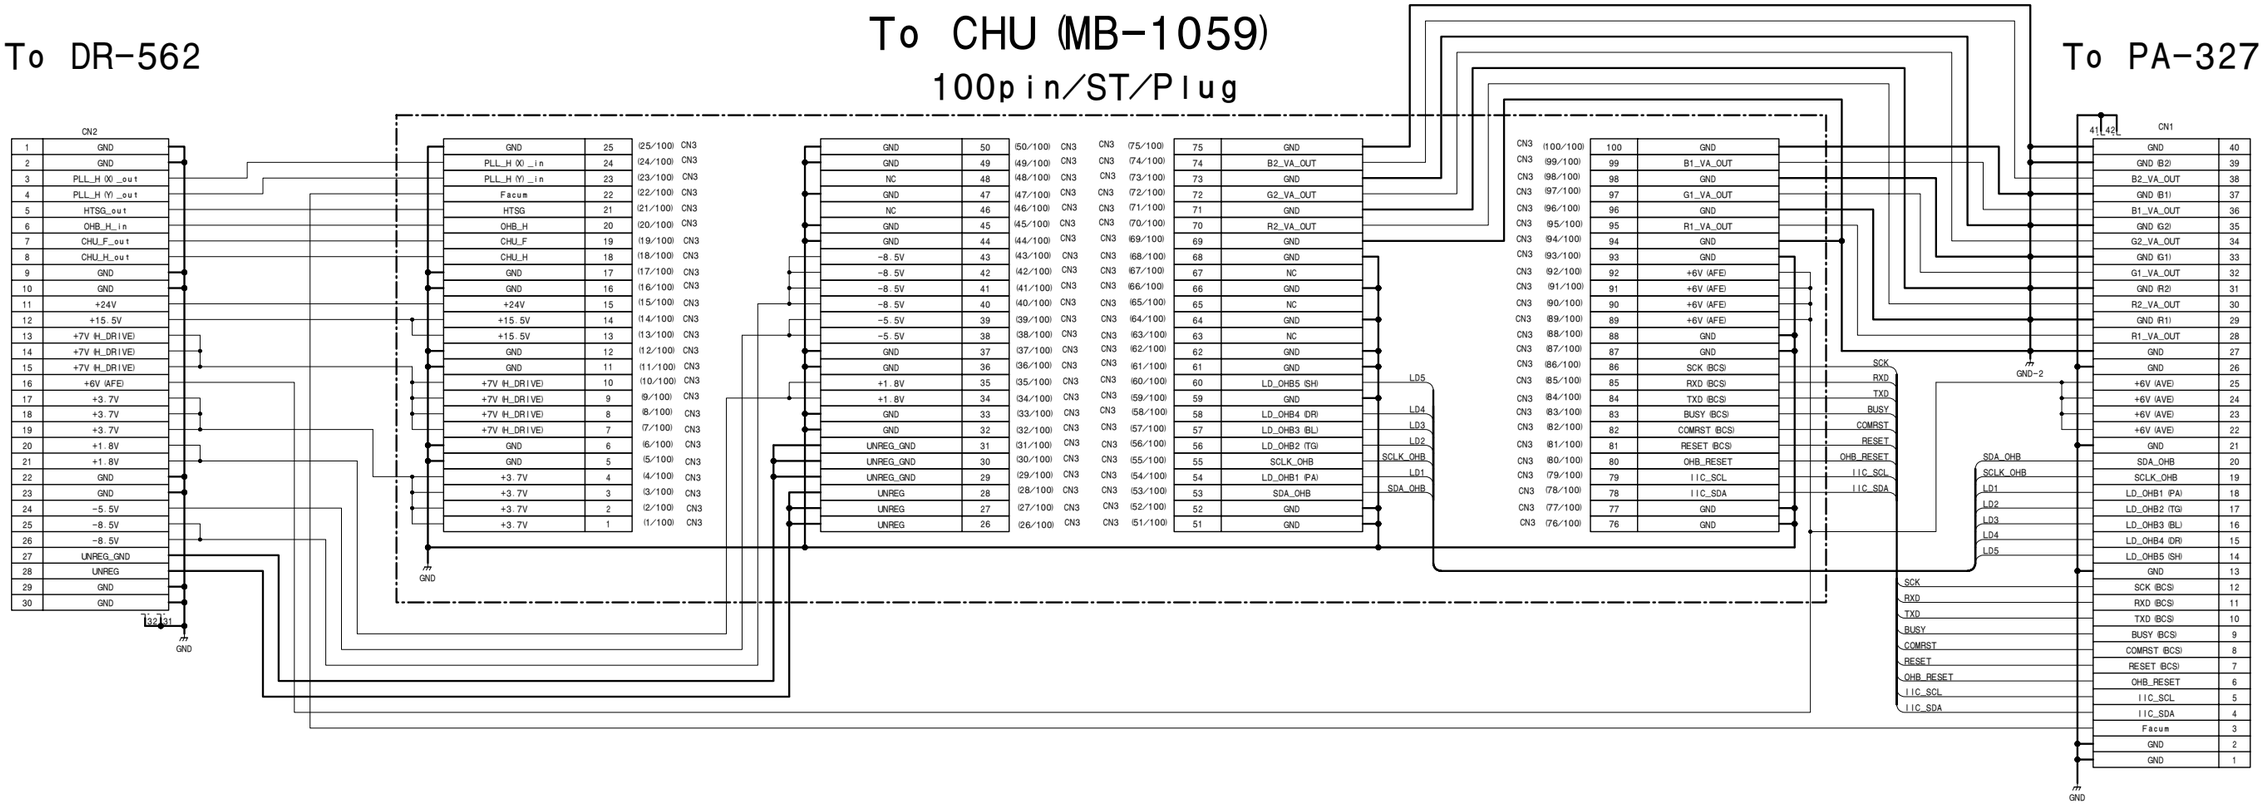

CN-2723


BOARD NO. 1-865-966-11, 21

HDC-1600_CN-2723_011_1

DAP-33 (1/4)

SUFFIX: -12, 13

DAP-33 (1/4)
SUFFIX: -12, 13

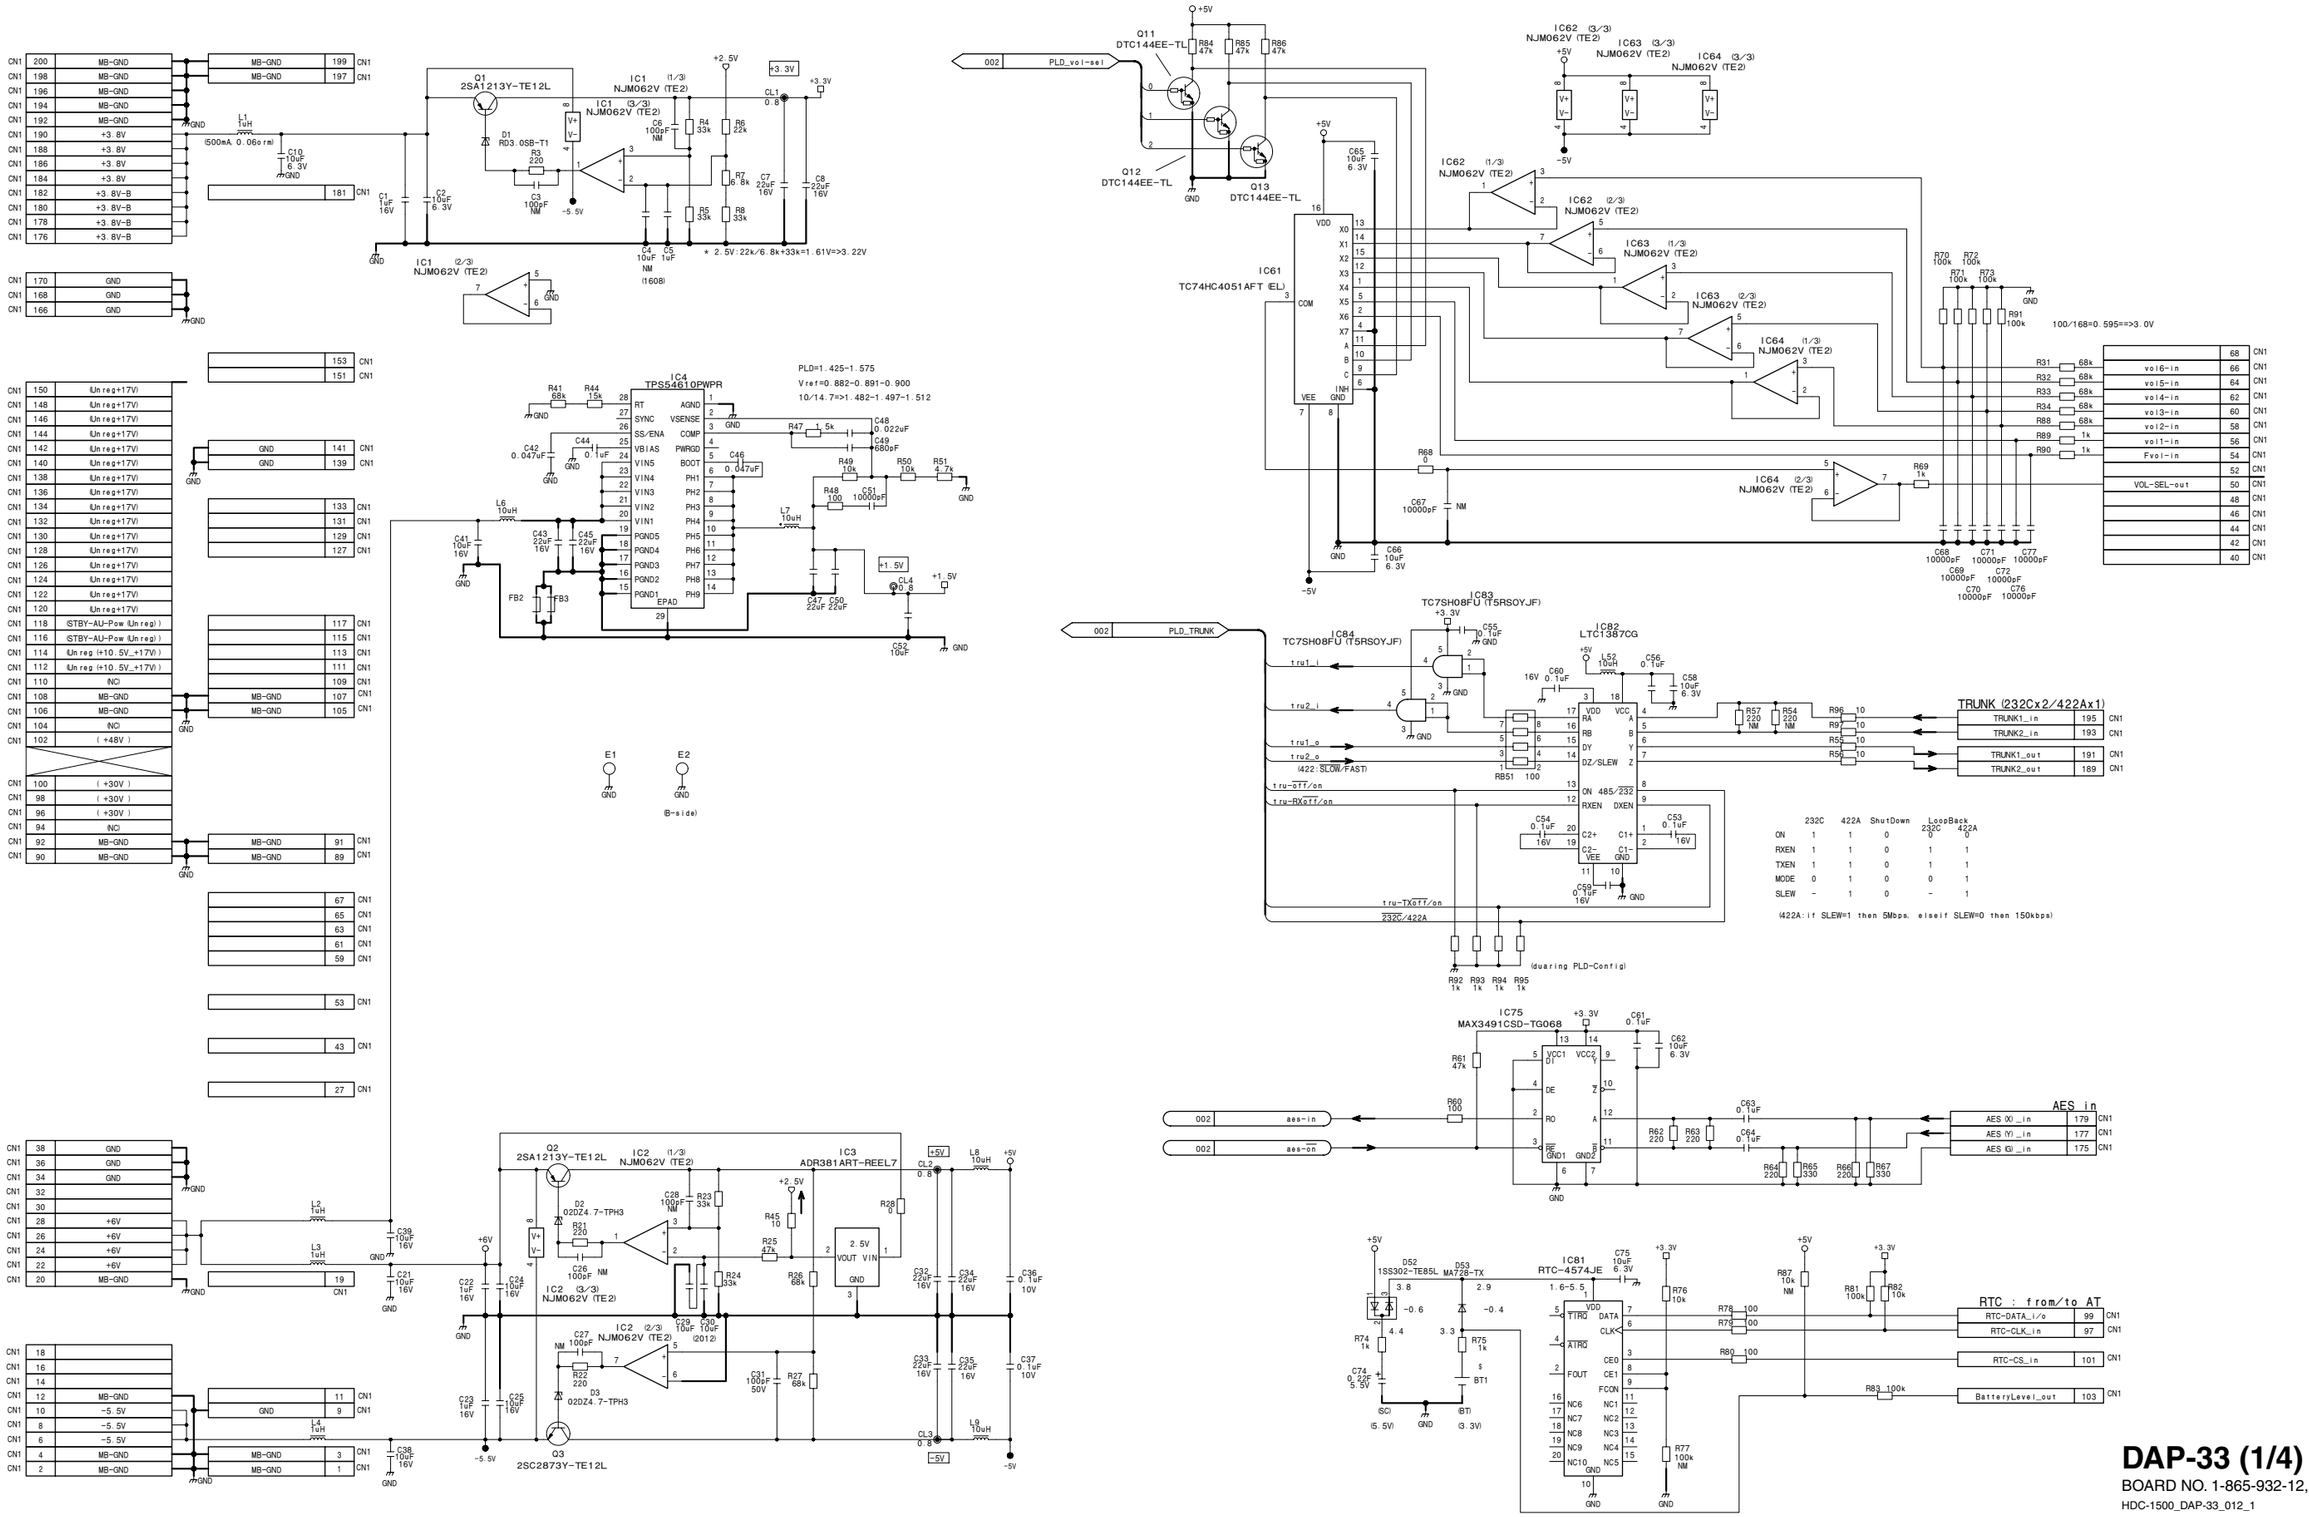

DAP-33 (1/4)

BOARD NO. 1-865-932-12, 13


HDC-1500_DAP-33_012_1

DAP-33 (2/4)
SUFFIX: -12, 13

REF. NO.	SUFFIX 12	SUFFIX 13-
R200	-	10

4-34


DAP-33 (2/4)
BOARD NO. 1-865-932-12, 13
HDC-1500_DAP-33_013_2

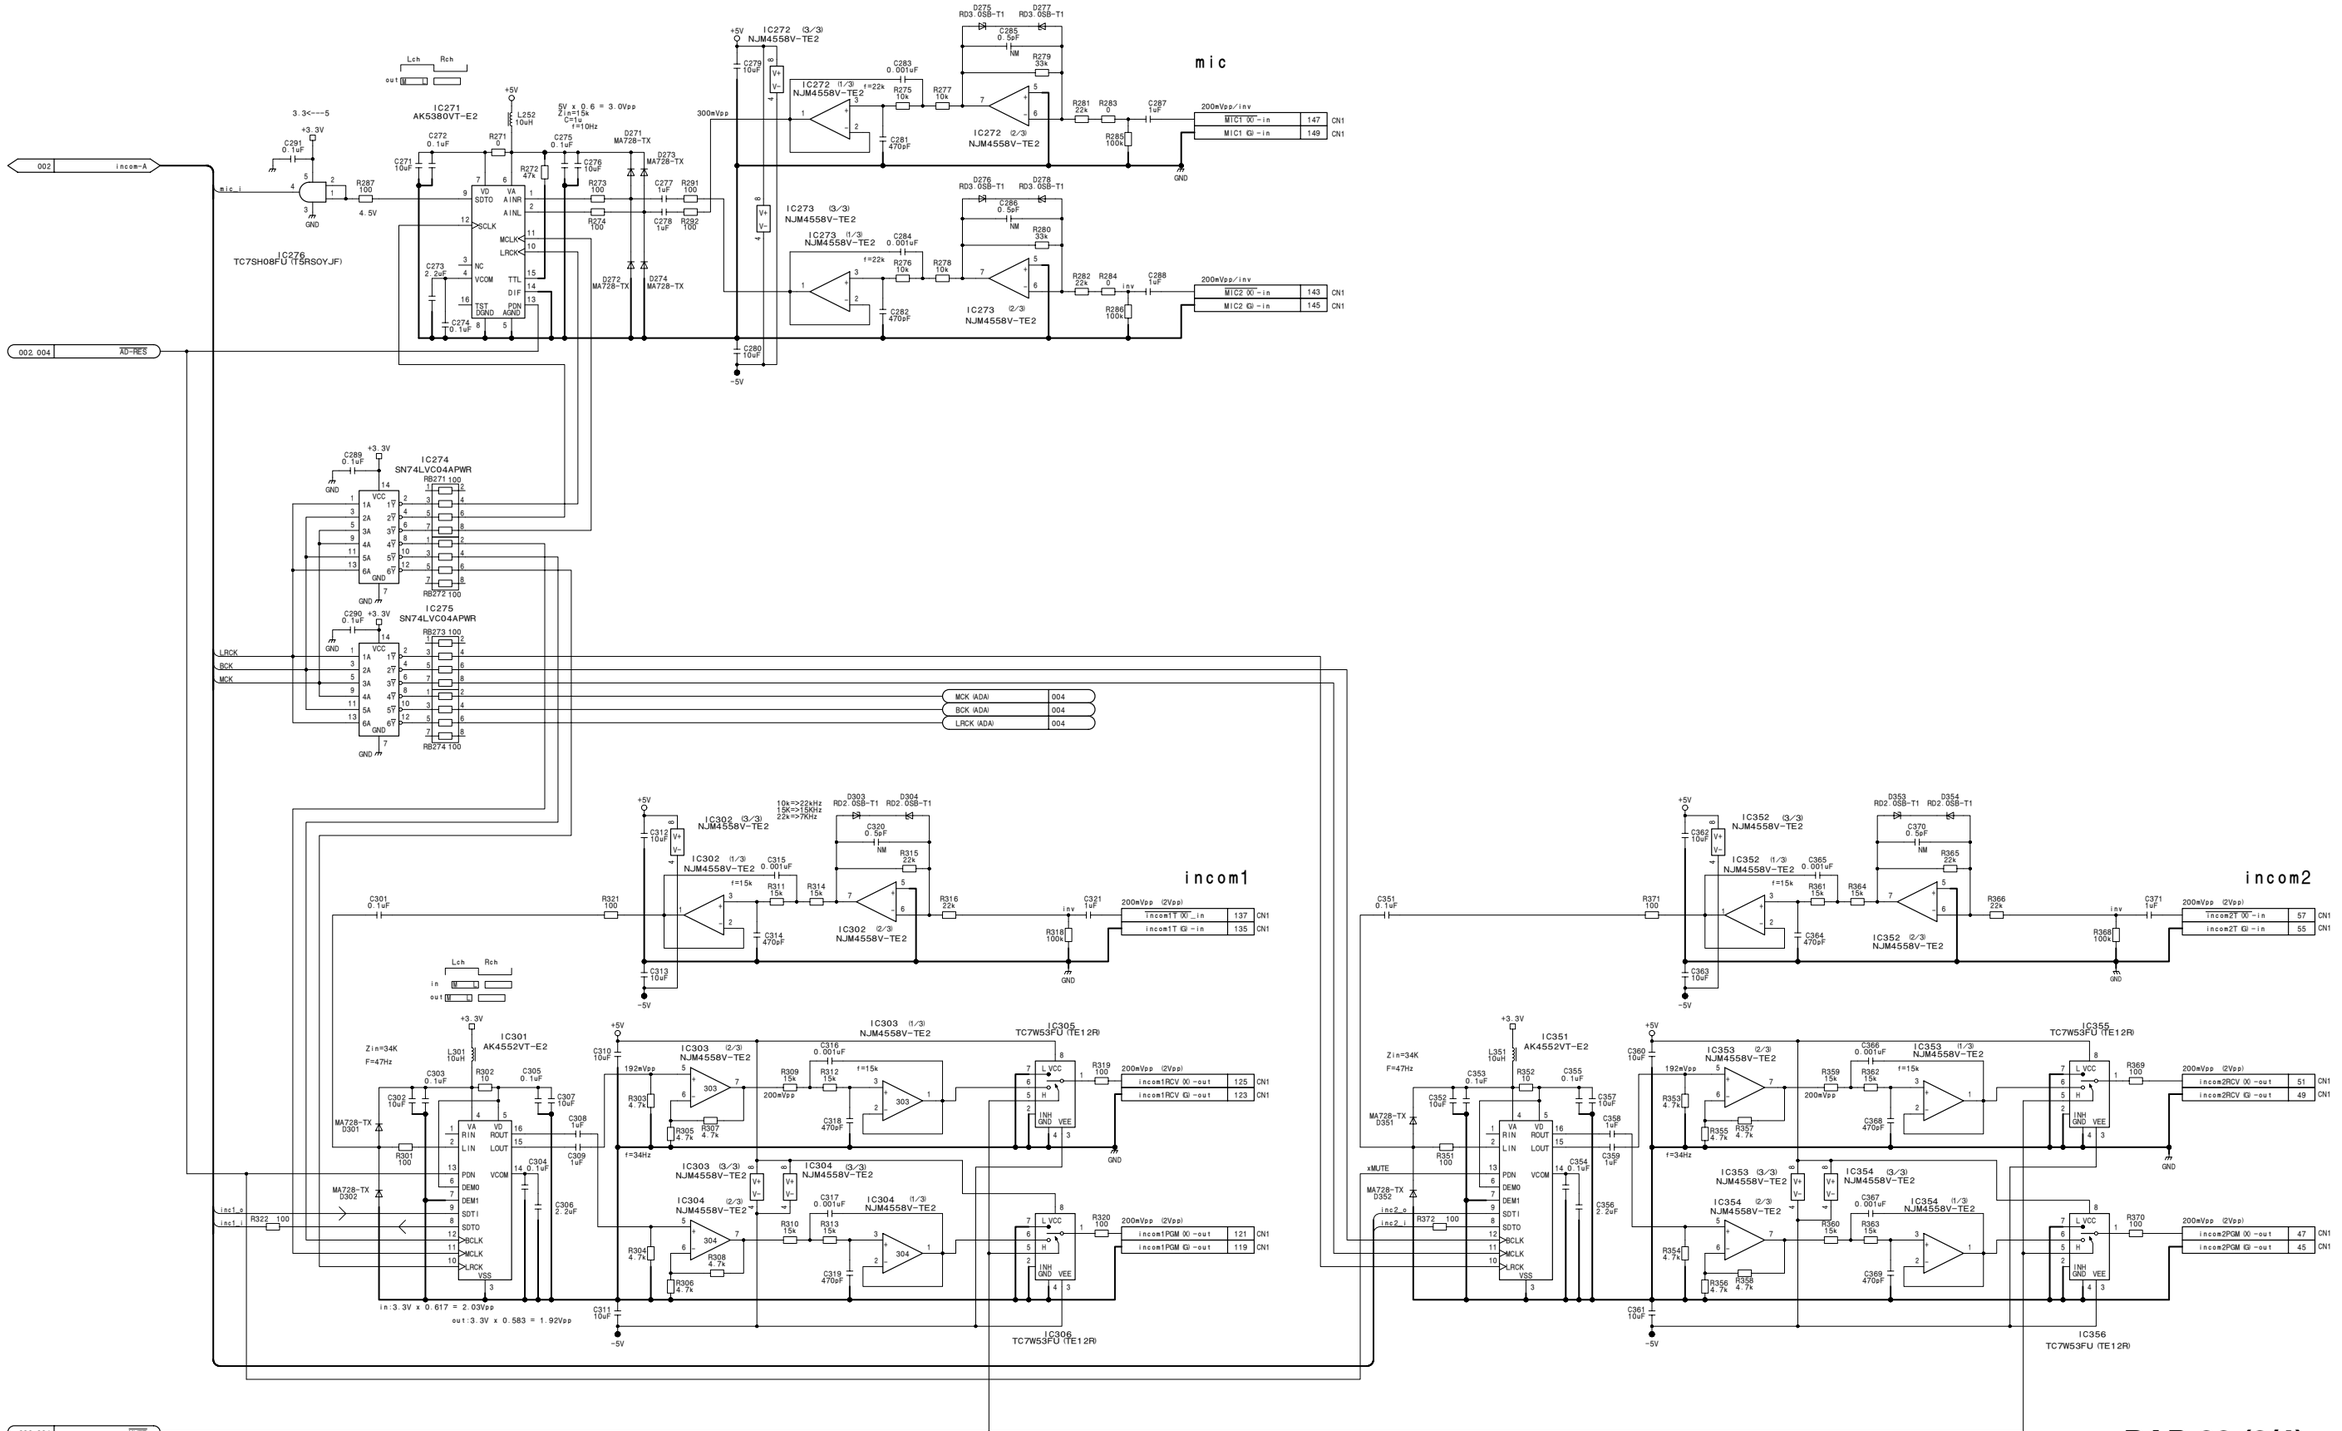

DAP-33 (3/4)
BOARD NO. 1-865-932-12, 13
HDC-1500_DAP-33_012_3

DAP-33 (4/4)
SUFFIX: -12, 13

DAP-33 (4/4)
SUFFIX: -12, 13

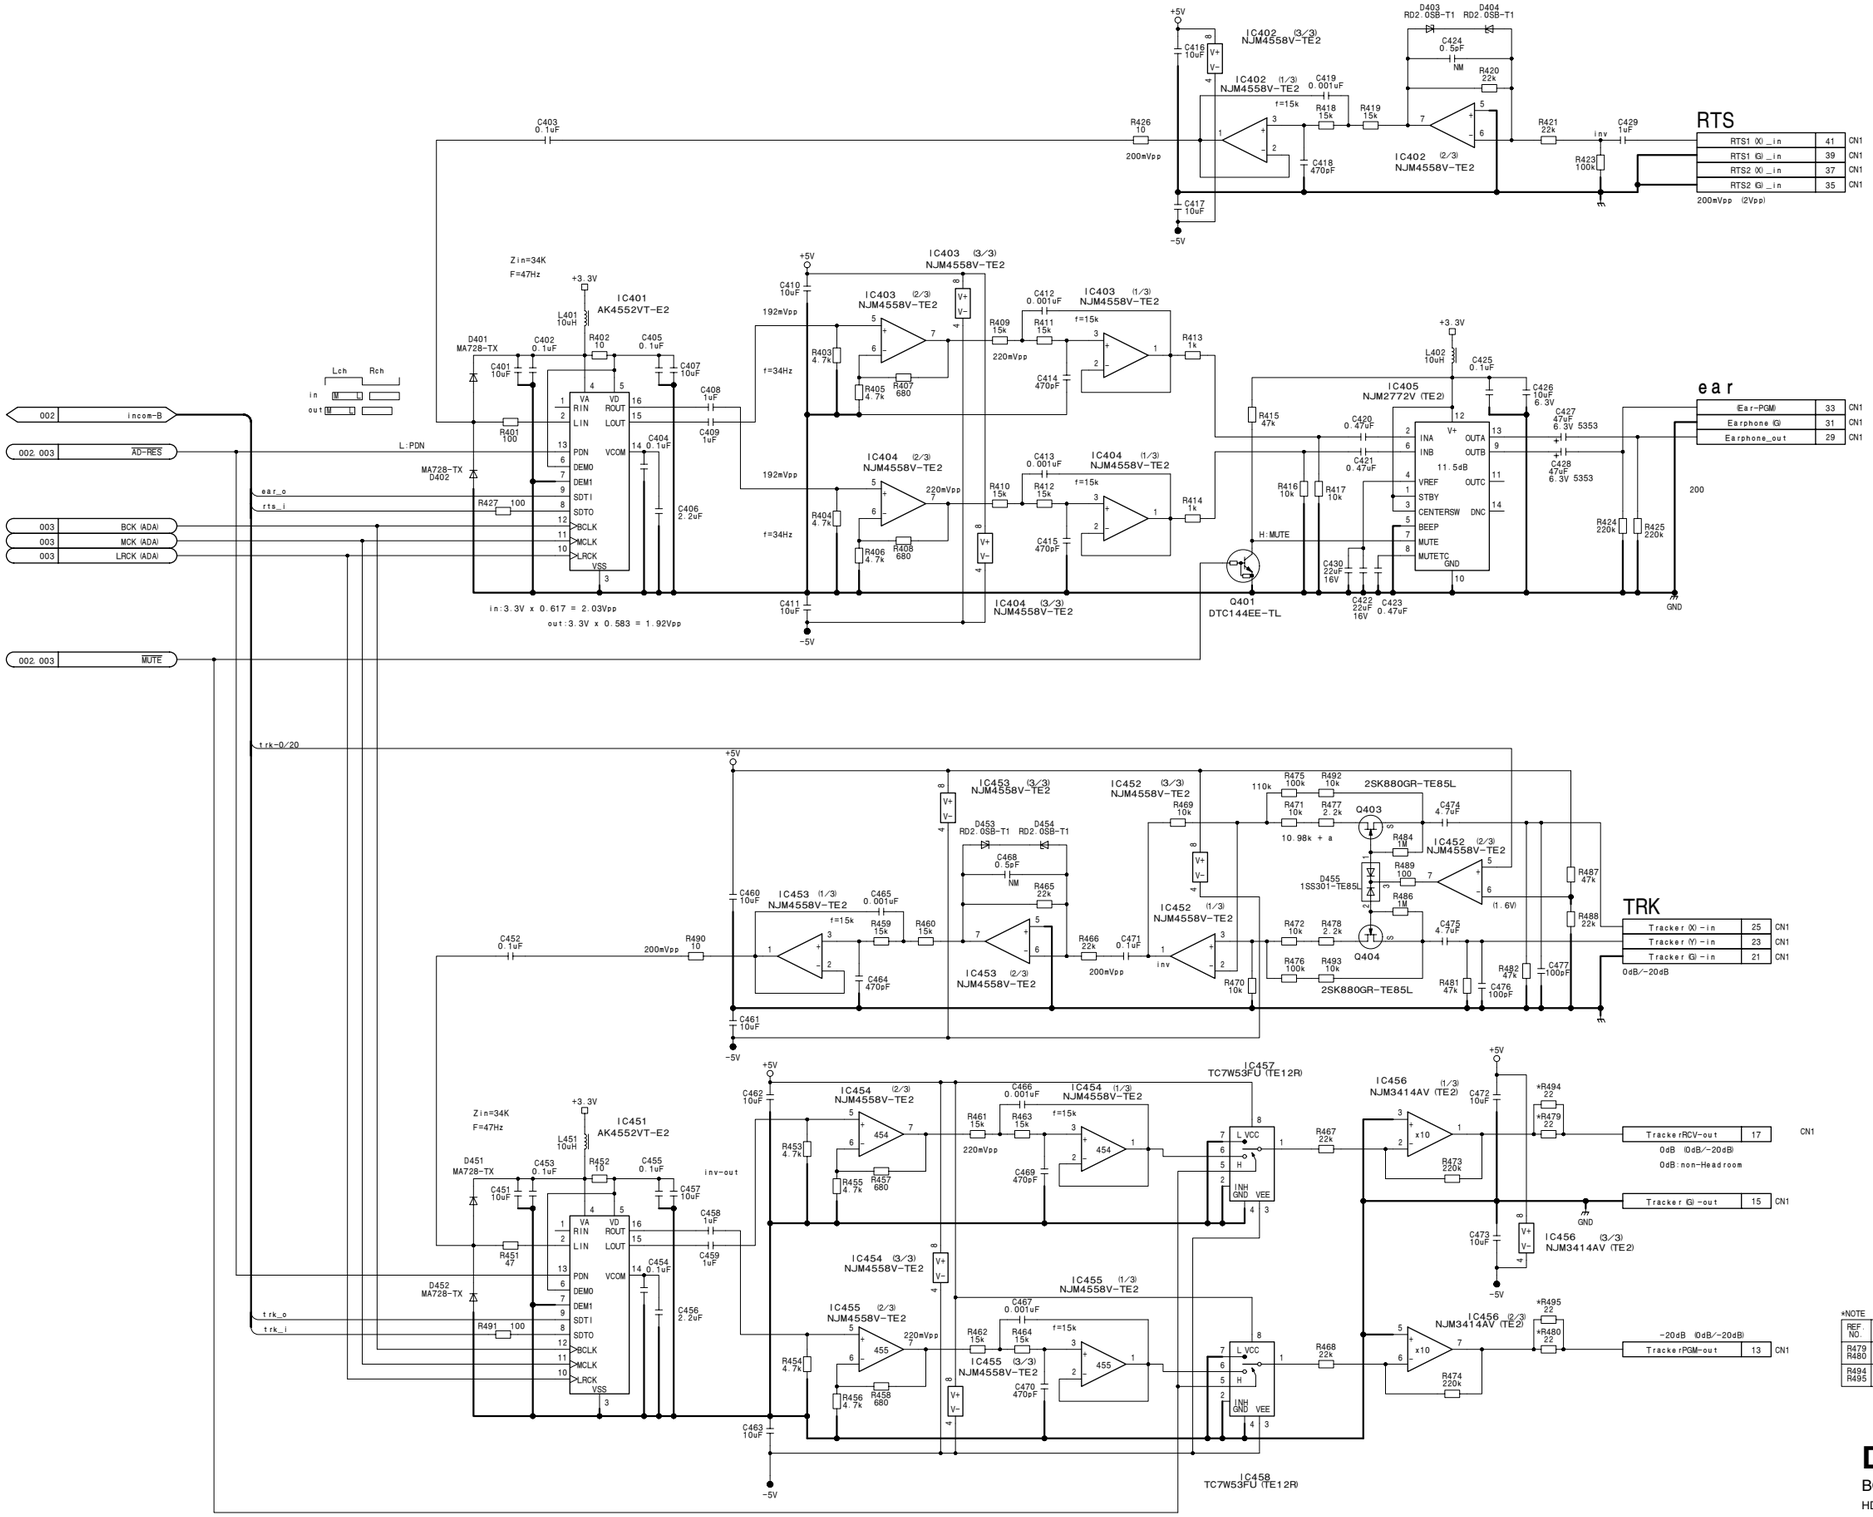

*NOTE


REF. NO.	SUFFIX 12	SUFFIX 13-
R479 R480	10	22
R494 R495	-	22

DAP-33 (4/4)
BOARD NO. 1-865-932-12, 13
HDC-1500_DAP-33_013_4

4-36

DPR-265 (1/8)
SUFFIX: -11, 13, 14


DPR-264_200P (F) (to MB) -CN (1-794-239-11)

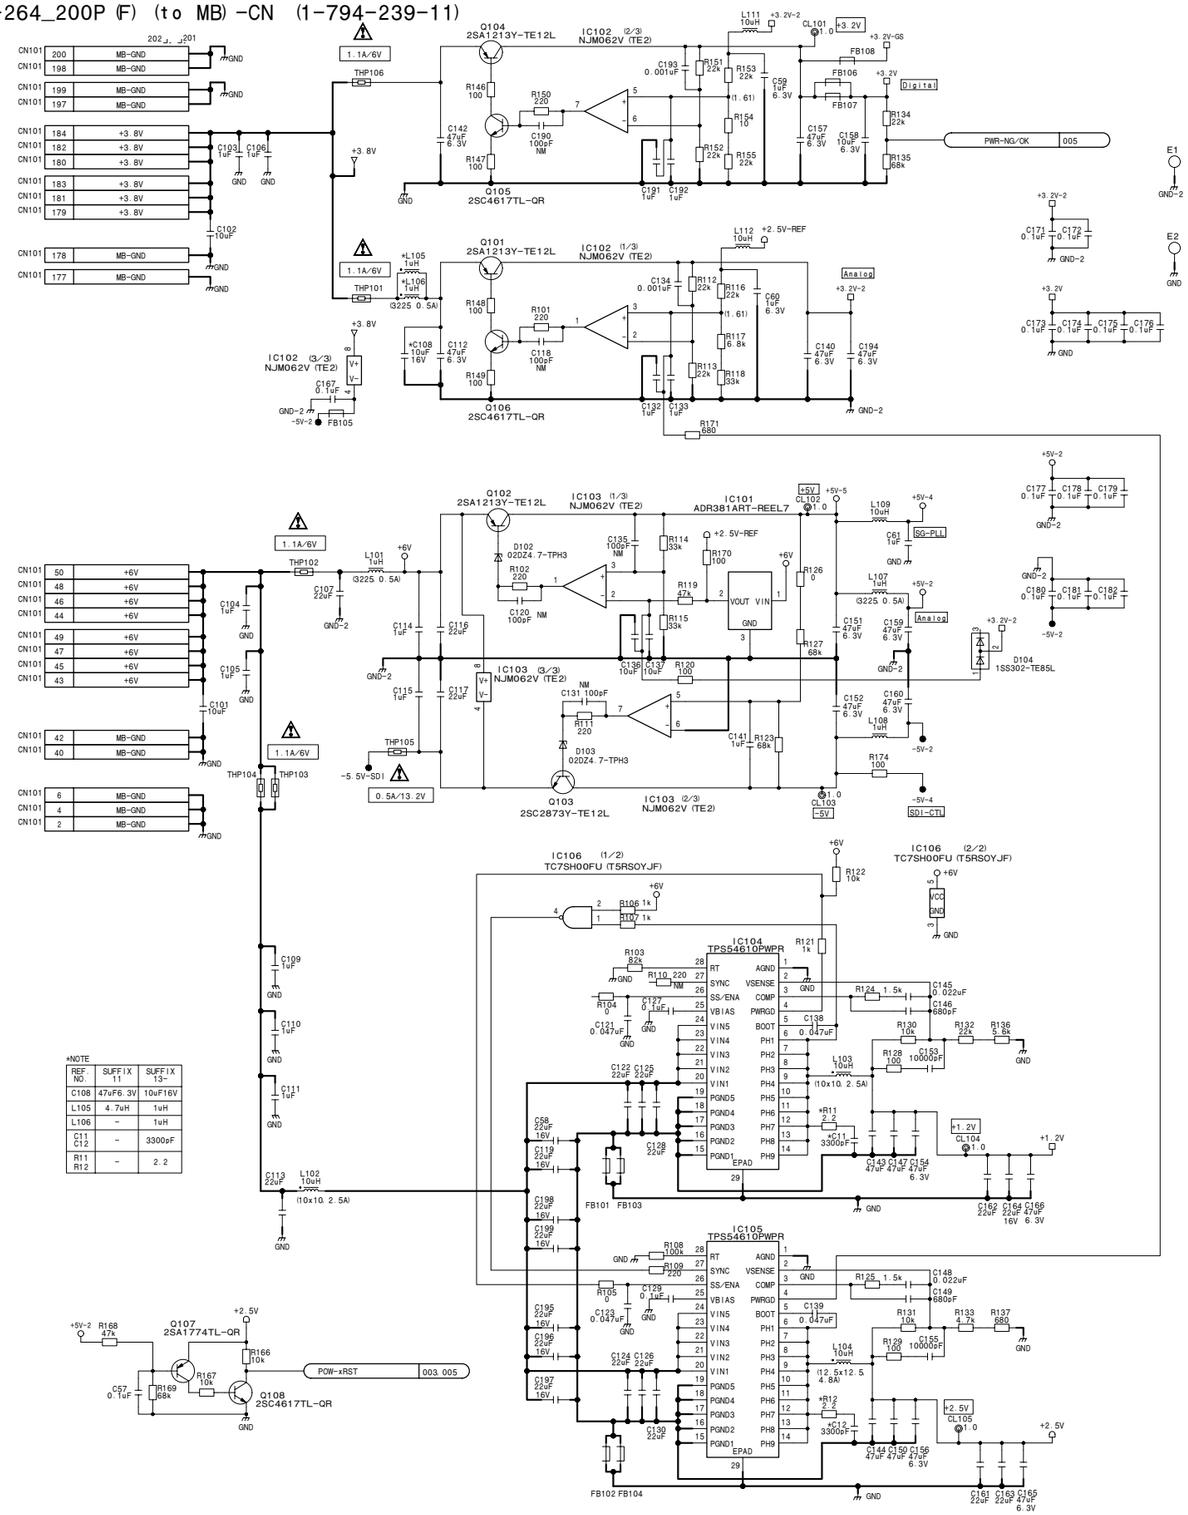


+NOTE


REF NO.	SUFFIX 11	SUFFIX 13-
C108	47uF6.3V	10uF16V
L105	4.7uH	1uH
L106	-	1uH
C11 C12	-	3300pF
R11 R12	-	2.2


DPR-265_200P (M) (to SDI) -CN (1-794-452-11)

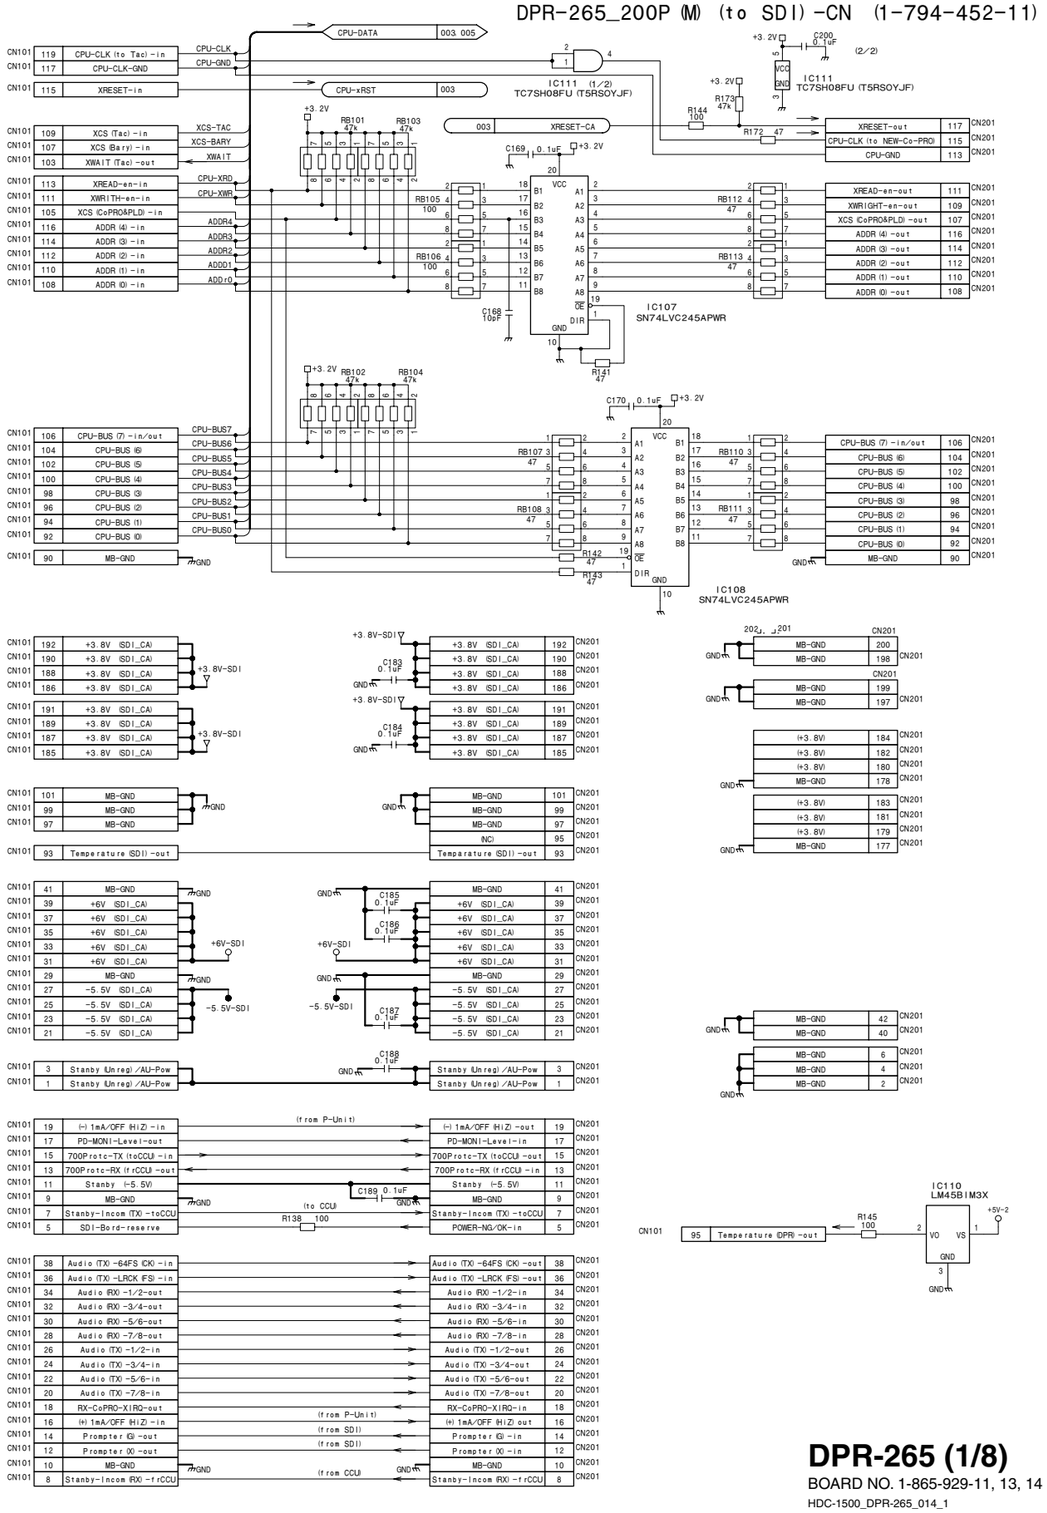


DPR-265 (1/8)
BOARD NO. 1-865-929-11, 13, 14
HDC-1500_DPR-265_014_1

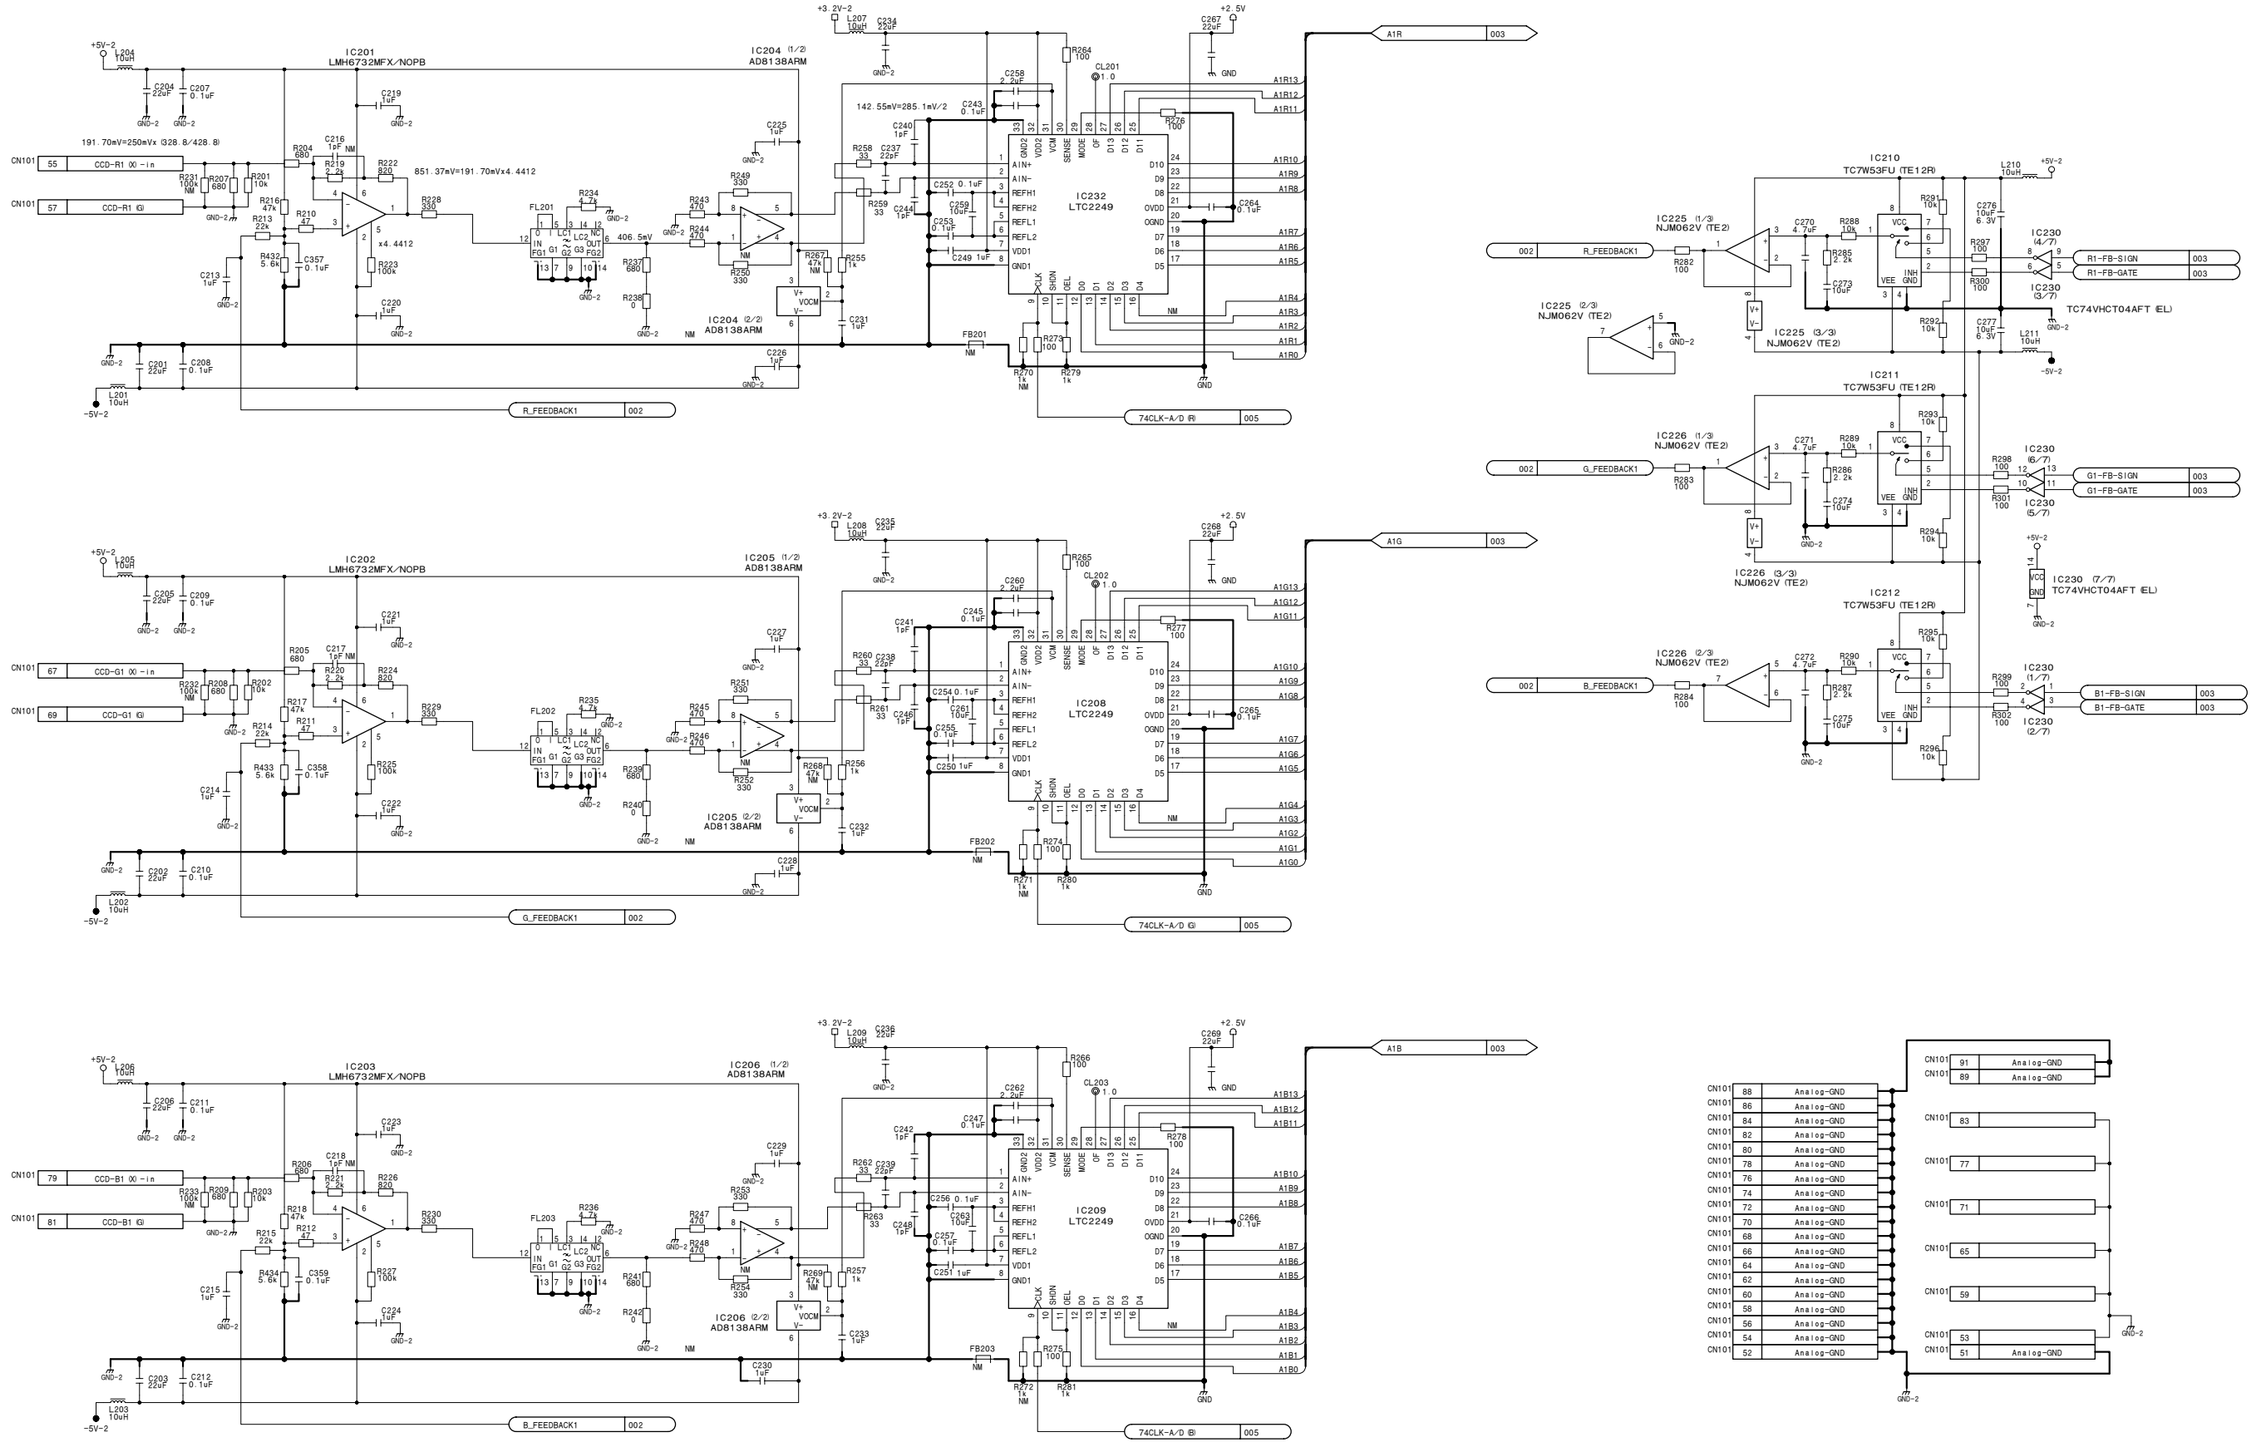
IC201 LMH6732MFX/NOPB
IC202 LMH6732MFX/NOPB
IC203 LMH6732MFX/NOPB
IC204 (1/2) AD8138ARM
IC204 (2/2) AD8138ARM
IC205 (1/2) AD8138ARM
IC205 (2/2) AD8138ARM
IC206 (1/2) AD8138ARM
IC206 (2/2) AD8138ARM
IC208 LTC2249
IC209 LTC2249
IC232 LTC2249
IC210 TC7W53FU (TE12R)
IC211 TC7W53FU (TE12R)
IC212 TC7W53FU (TE12R)
IC225 (1/3) NJM062V (TE2)
IC225 (2/3) NJM062V (TE2)
IC225 (3/3) NJM062V (TE2)
IC226 (1/3) NJM062V (TE2)
IC226 (2/3) NJM062V (TE2)
IC226 (3/3) NJM062V (TE2)
IC230 (4/7) TC74VHCT04AFT (EL)
IC230 (3/7) TC74VHCT04AFT (EL)
IC230 (5/7) TC74VHCT04AFT (EL)
IC230 (6/7) TC74VHCT04AFT (EL)
IC230 (7/7) TC74VHCT04AFT (EL)
IC230 (1/7) TC74VHCT04AFT (EL)
IC230 (2/7) TC74VHCT04AFT (EL)
CN101 55 CCD-R1 (0) -in
CN101 57 CCD-R1 (G)
CN101 67 CCD-G1 (0) -in
CN101 69 CCD-G1 (G)
CN101 79 CCD-B1 (0) -in
CN101 81 CCD-B1 (G)
191.70mV=250mVx (328.8/428.8)
851.37mV=191.70mVx4.4412
142.55mV=285.1mV/2
406.5mV
x4.4412
R_FEEDBACK1 002
G_FEEDBACK1 002
B_FEEDBACK1 002
74CLK-A/D (R) 005
74CLK-A/D (G) 005
74CLK-A/D (B) 005
A1R 003
A1G 003
A1B 003
R1-FB-SIGN 003
R1-FB-GATE 003
G1-FB-SIGN 003
G1-FB-GATE 003
B1-FB-SIGN 003
B1-FB-GATE 003
Analog-GND

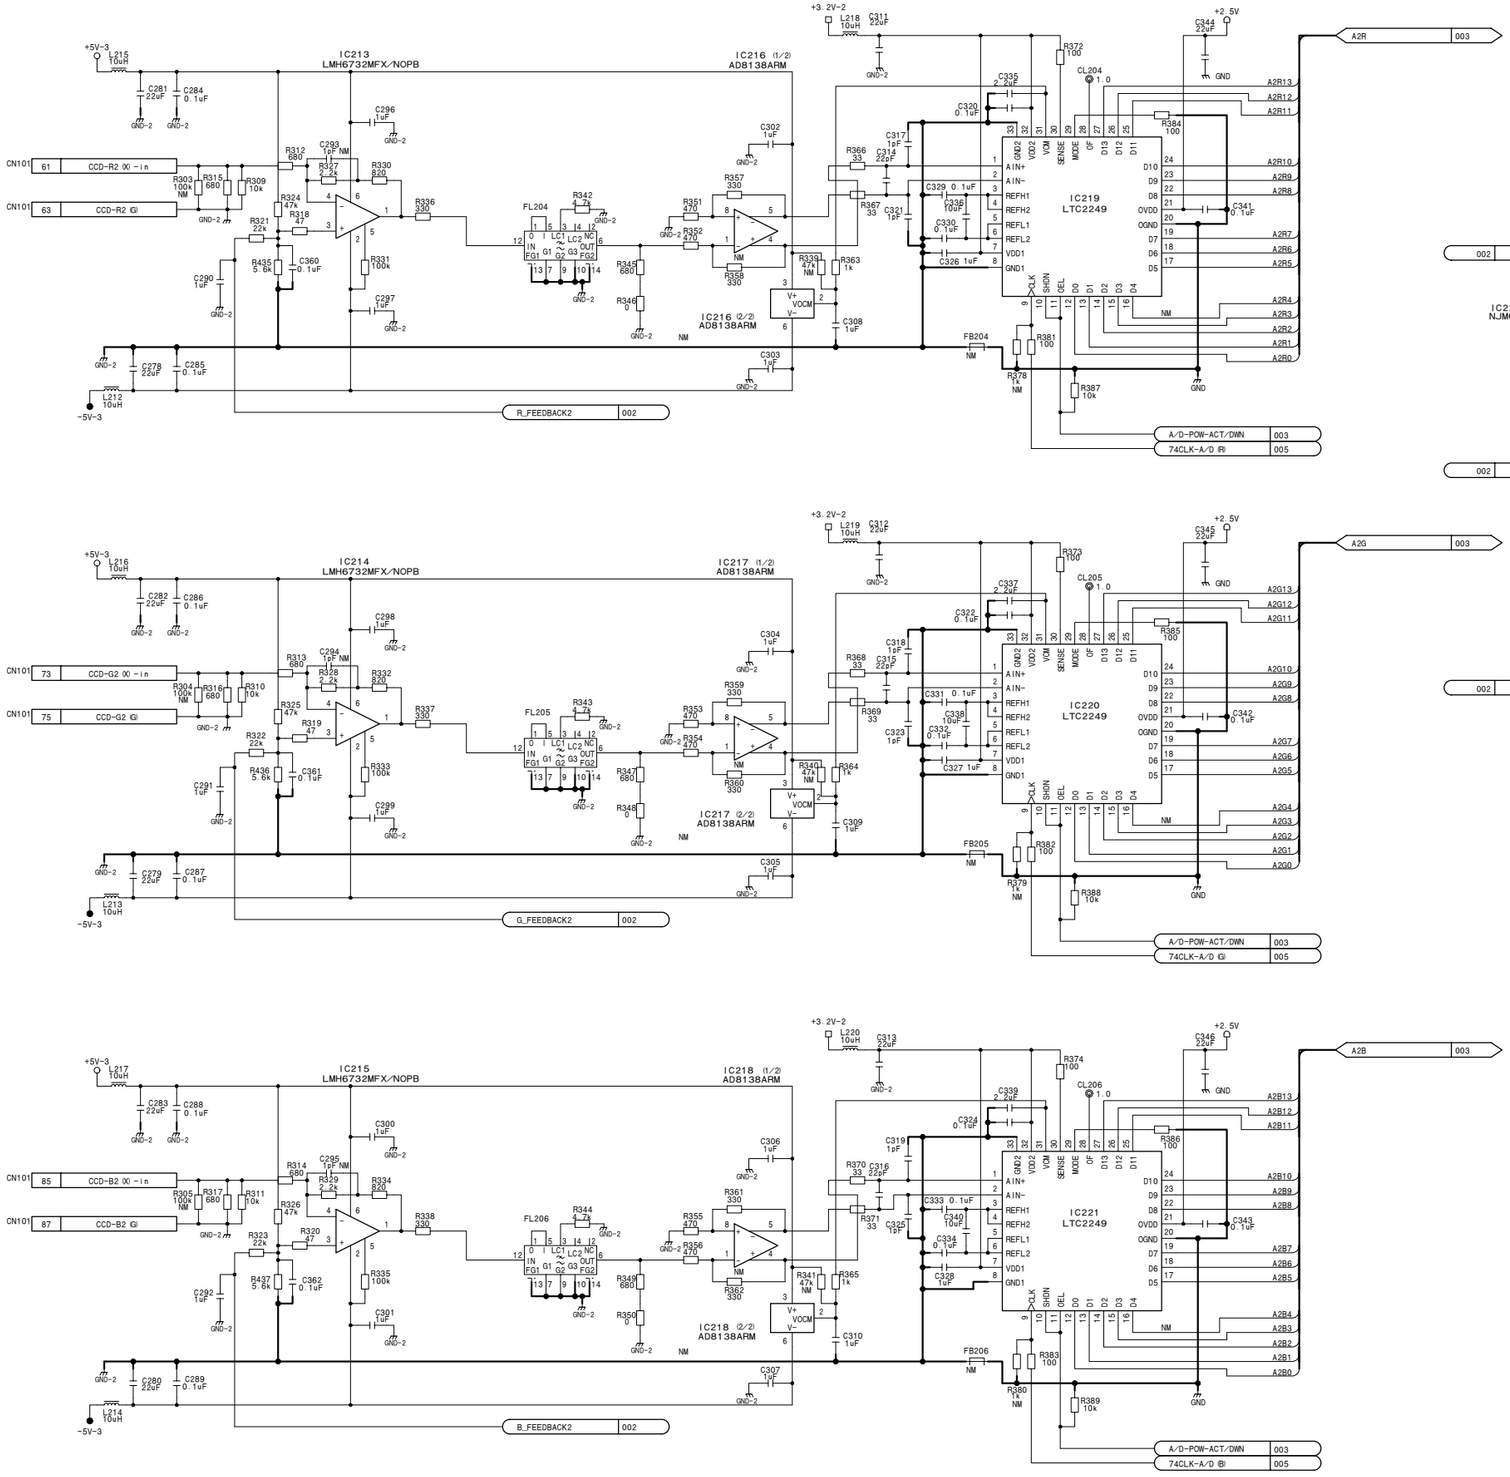

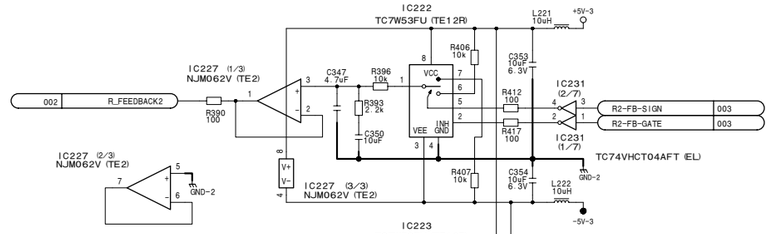

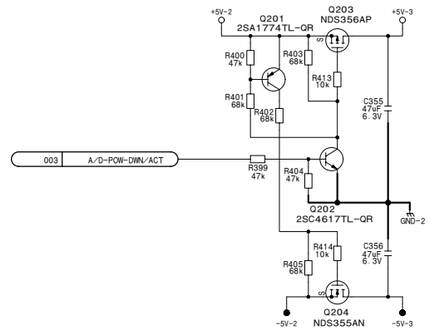



DPR-265 (2/8)


BOARD NO. 1-865-929-11, 13, 14


HDC-1500_DPR-265_012_2

DPR-265 (3/8)
SUFFIX: -11, 13, 14

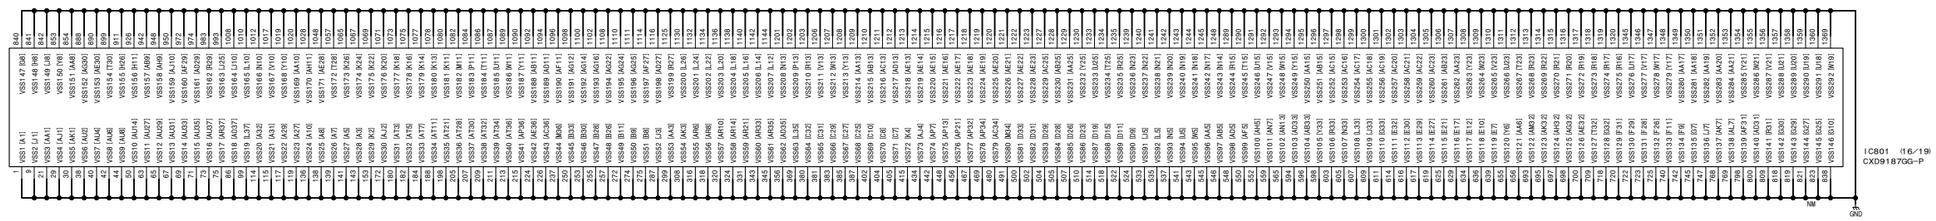

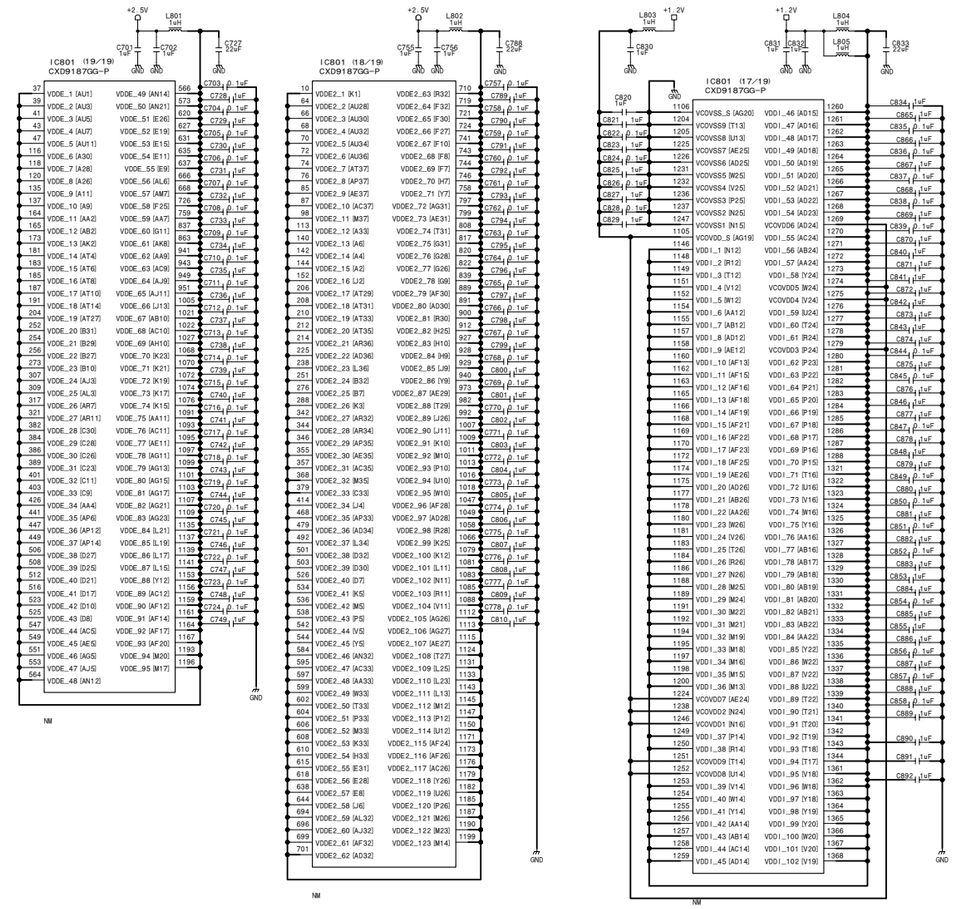


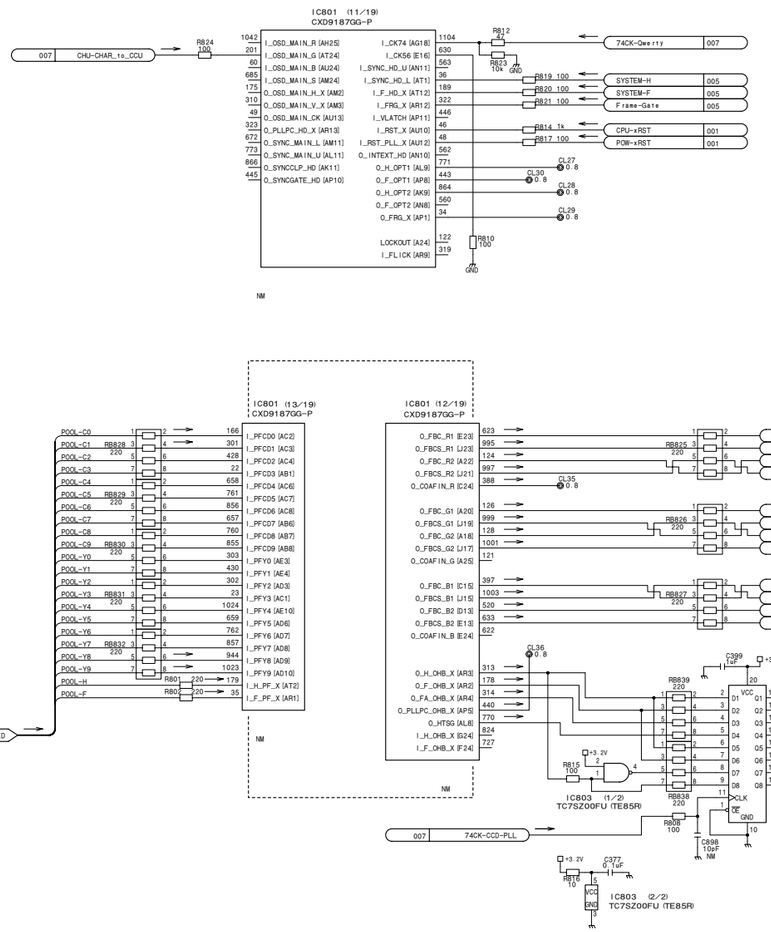

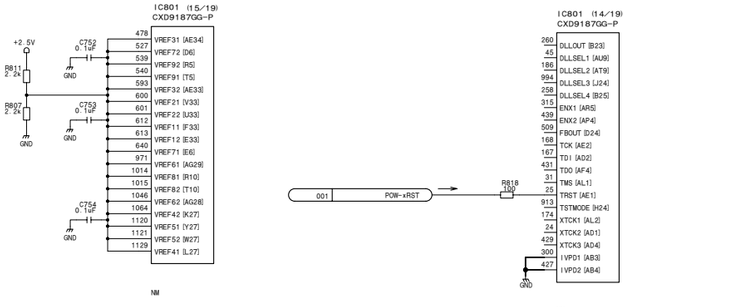


4-40

DPR-265 (3/8)
SUFFIX: -11, 13, 14

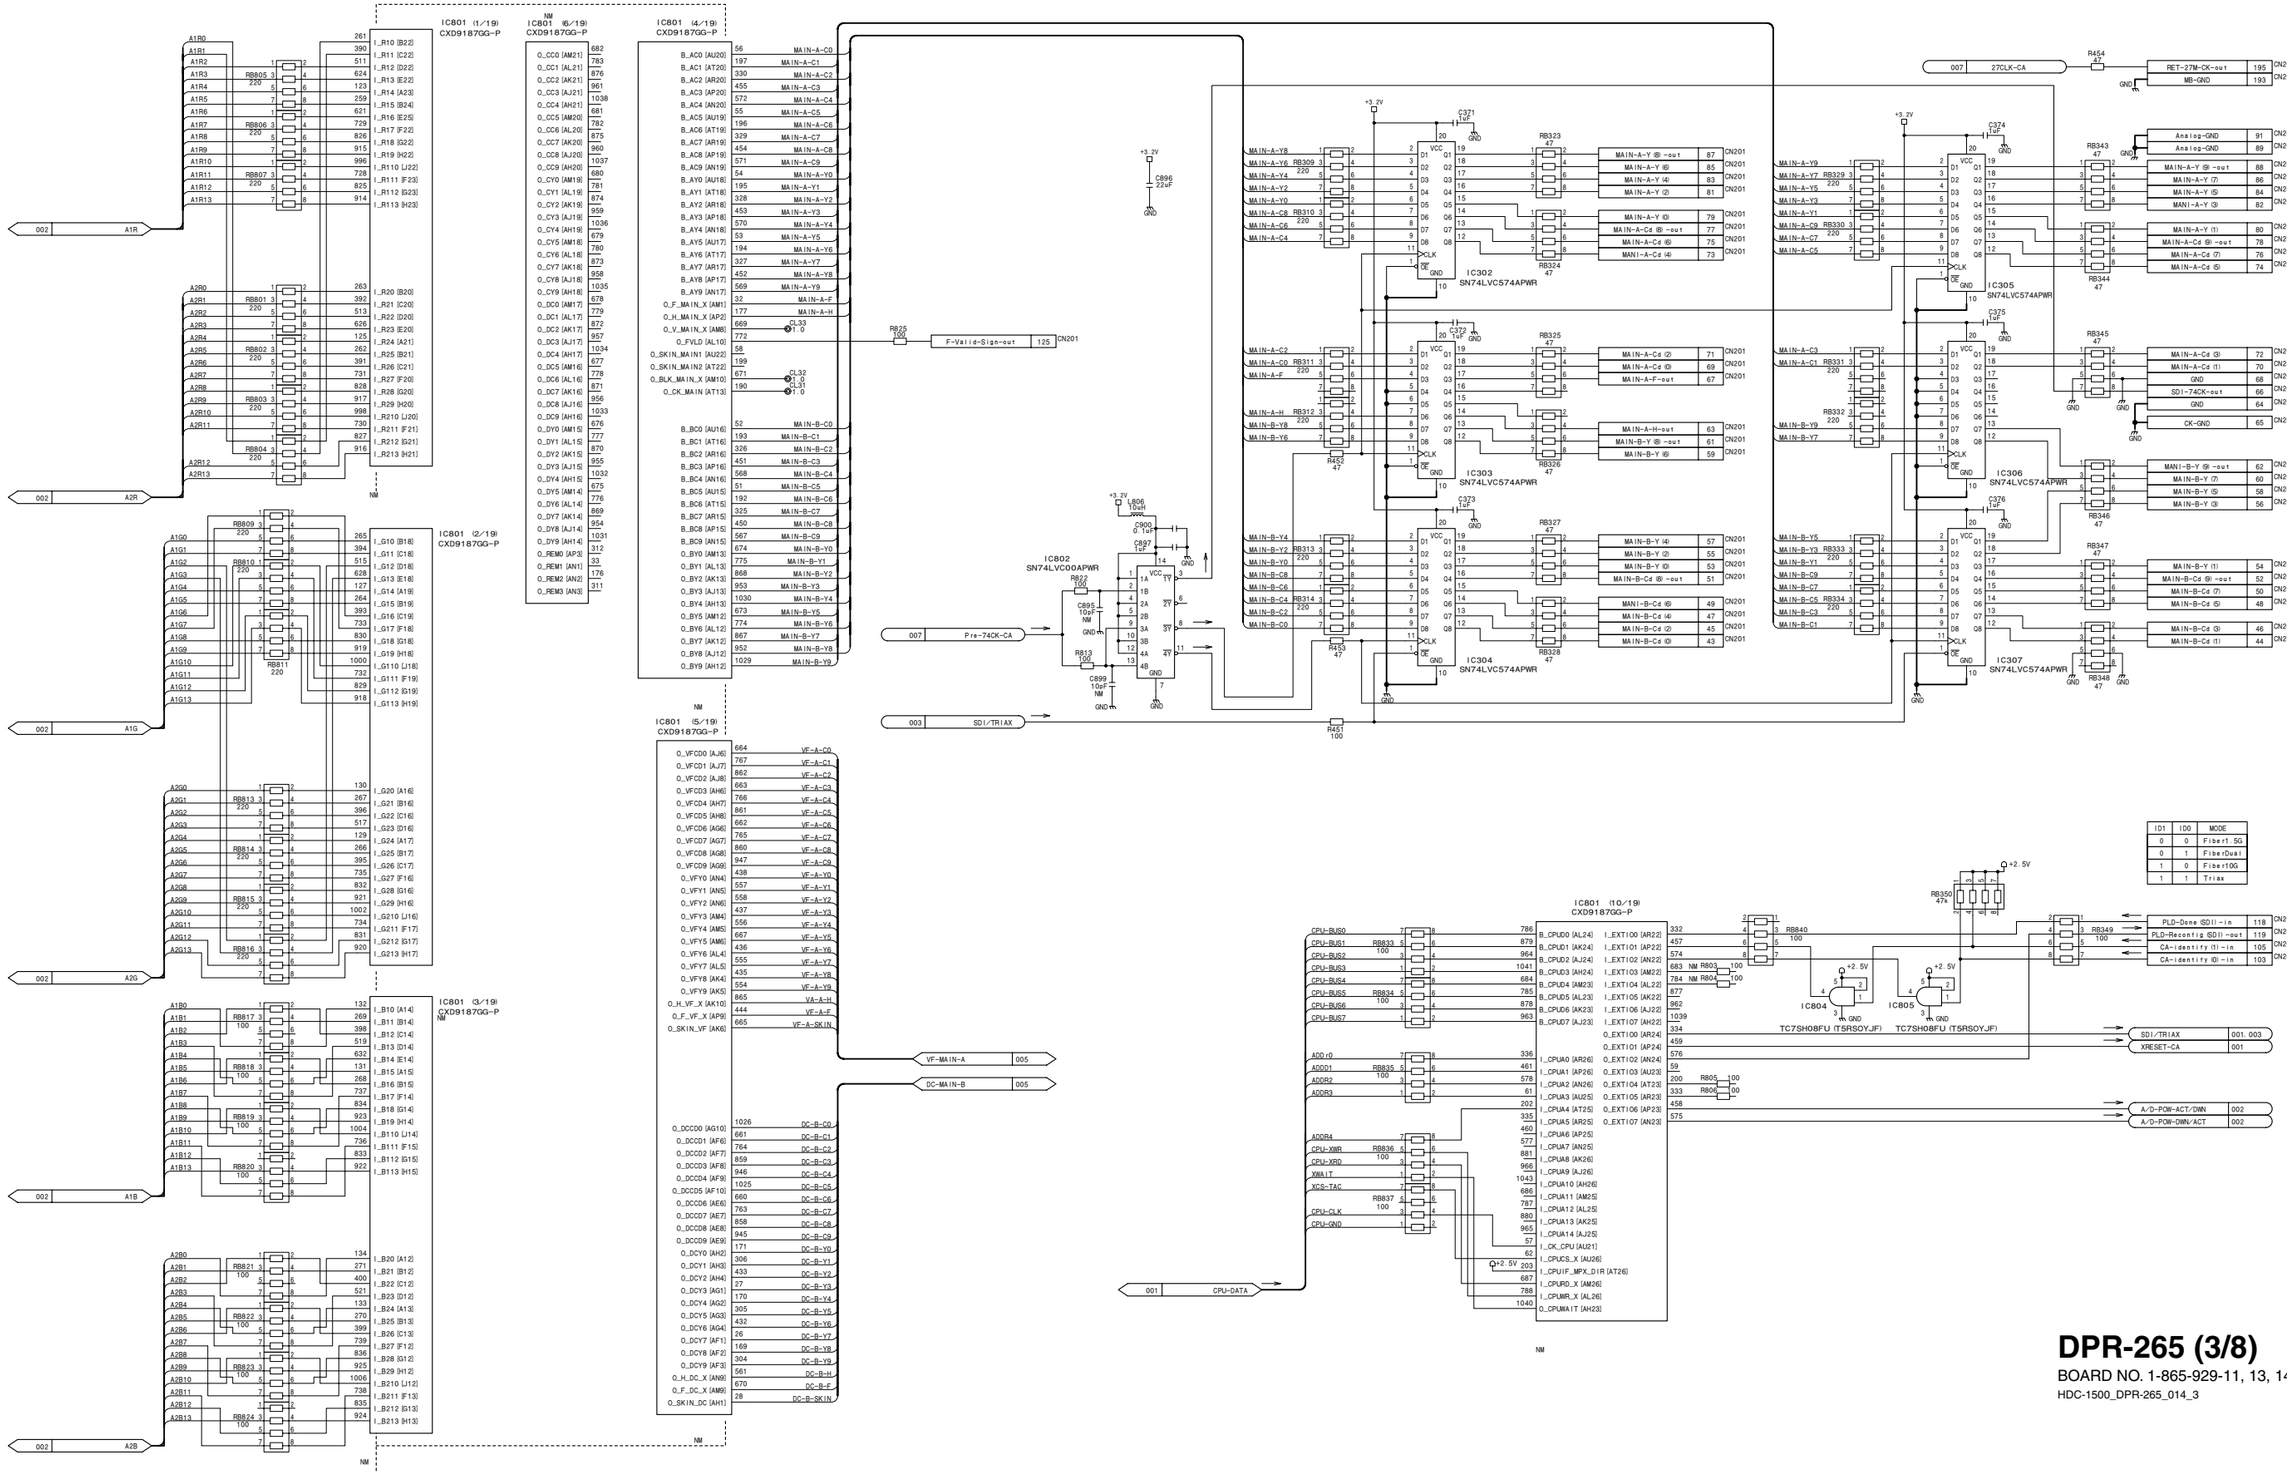


DPR-265 (3/8)
BOARD NO. 1-865-929-11, 13, 14
HDC-1500_DPR-265_014_3

DPR-265 (4/8)
SUFFIX: -11, 13, 14

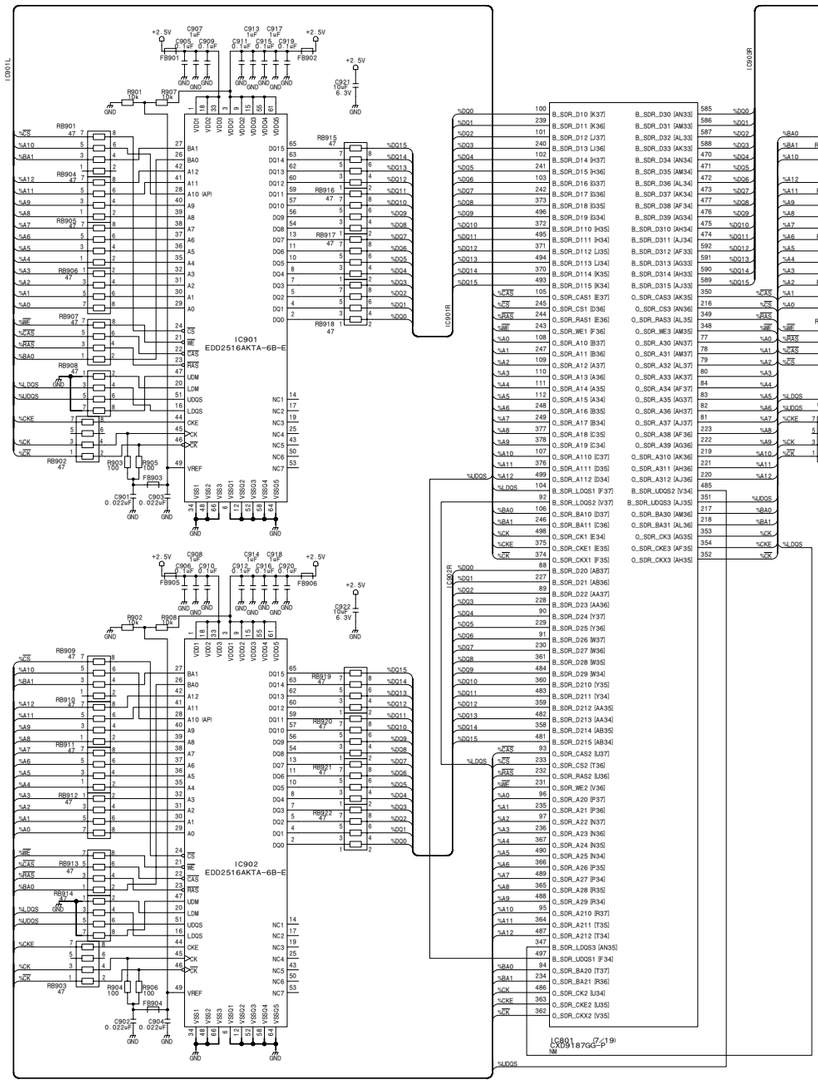


4-42


DPR-265 (4/8)
SUFFIX: -11, 13, 14

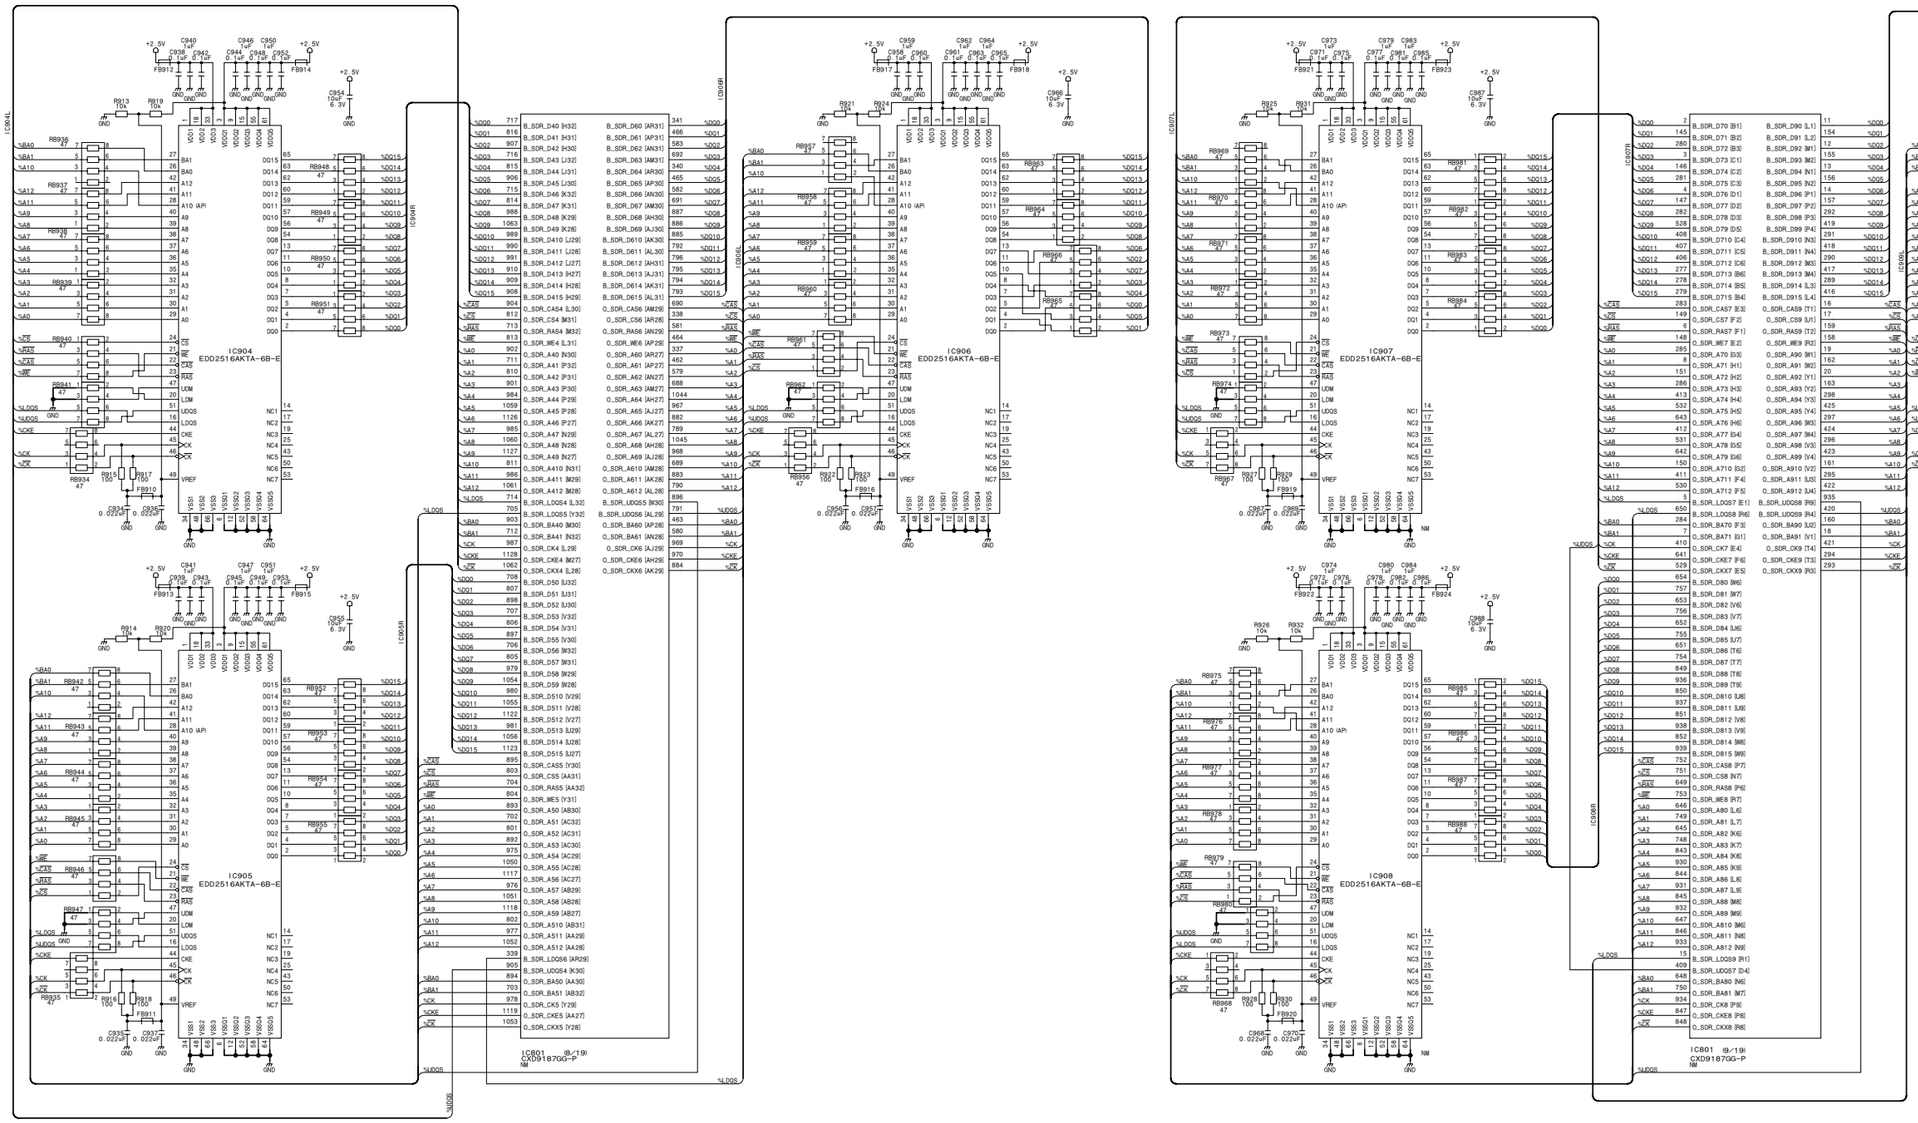


DPR-265 (4/8)
BOARD NO. 1-865-929-11, 13, 14
HDC-1500_DPR-265_012_4

DPR-265 (5/8)
SUFFIX: -11, 13, 14

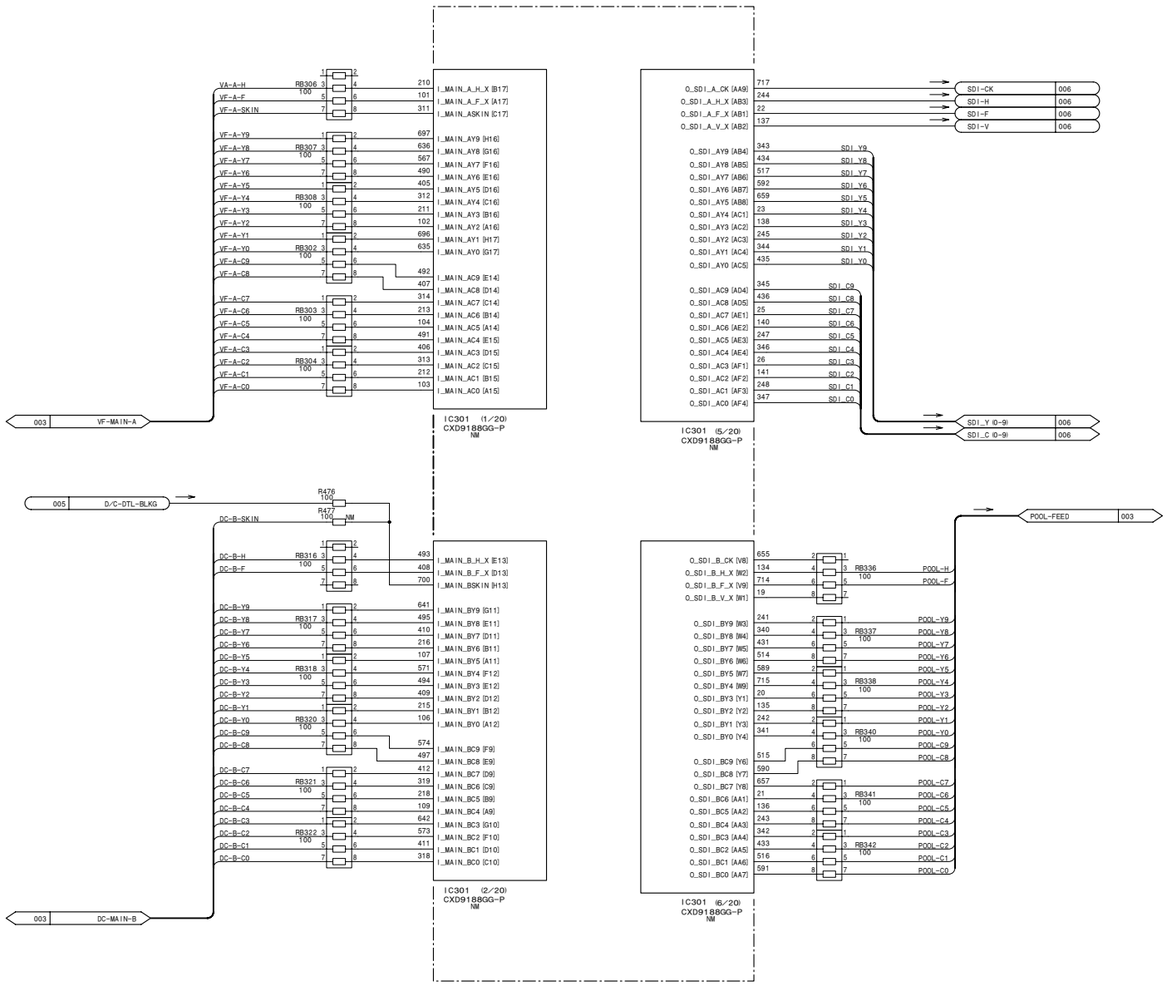

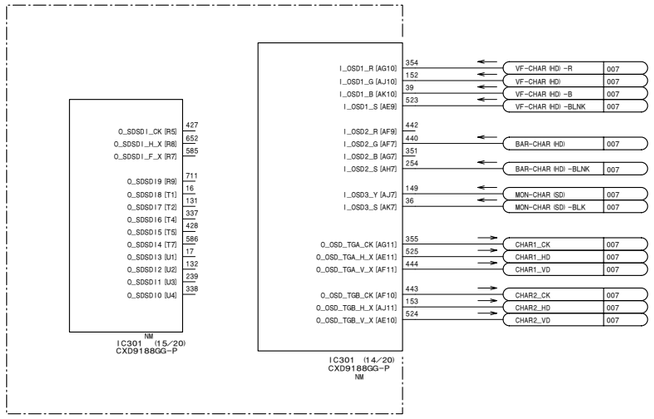



DPR-265 (5/8)
SUFFIX: -11, 13, 14

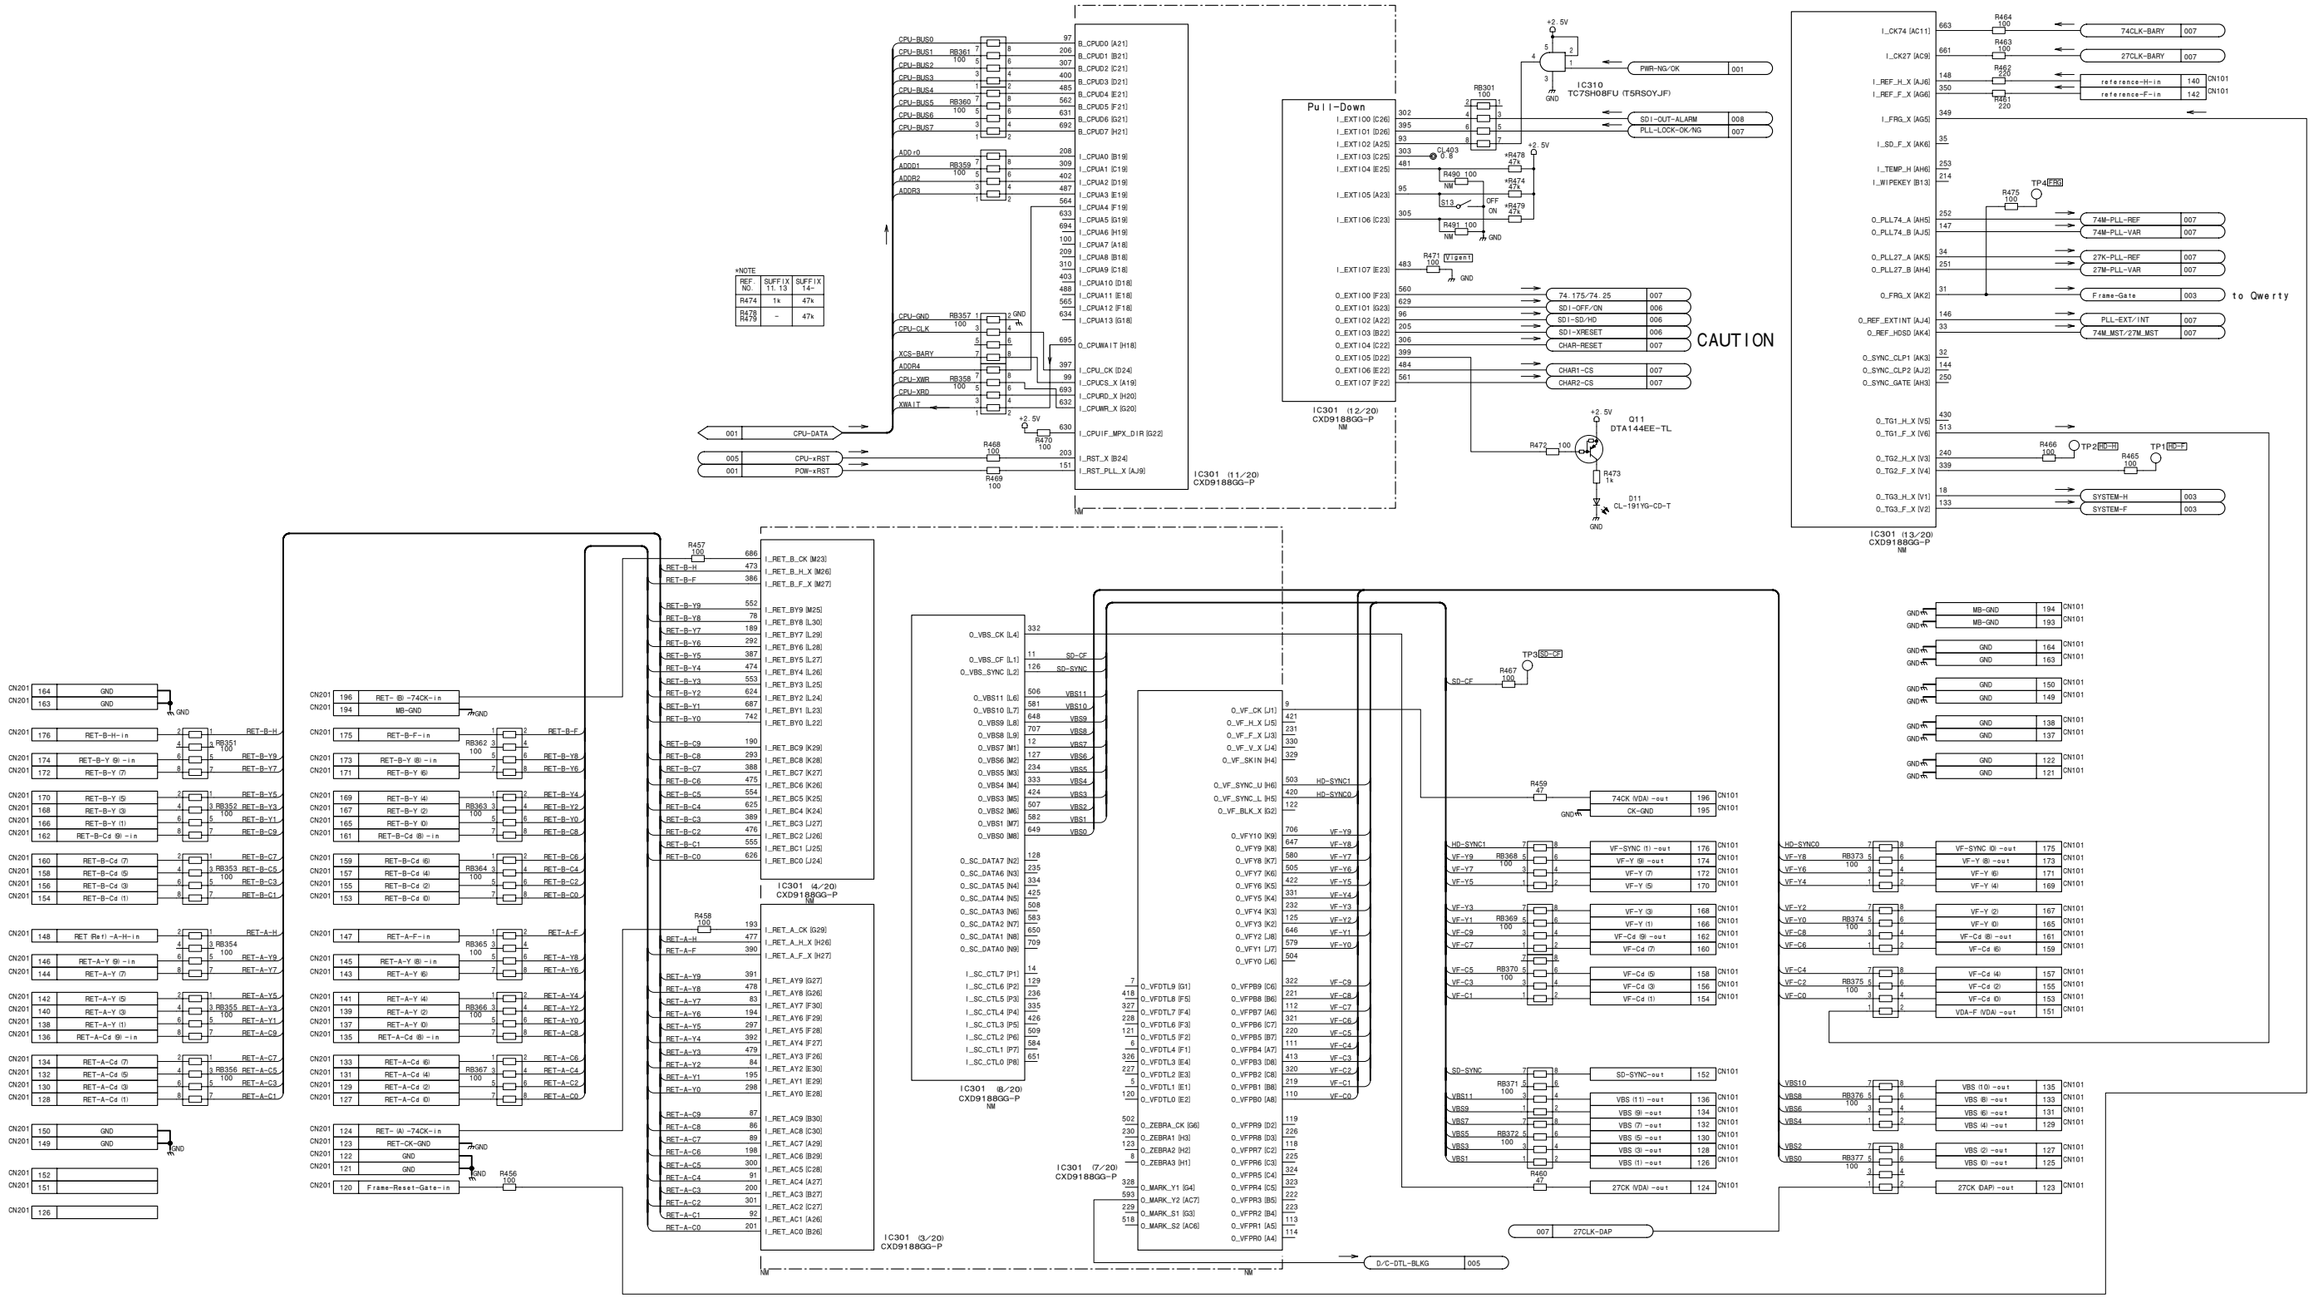



DPR-265 (5/8)
BOARD NO. 1-865-929-11, 13, 14
HDC-1500_DPR-265_014_5


DPR-265 (6/8)
SUFFIX: -11, 13, 14

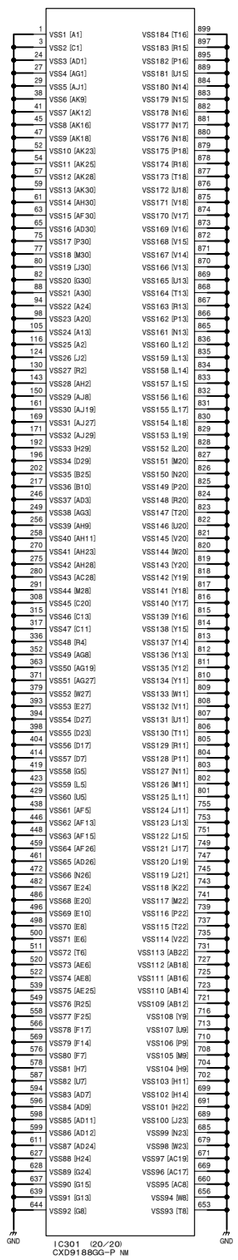


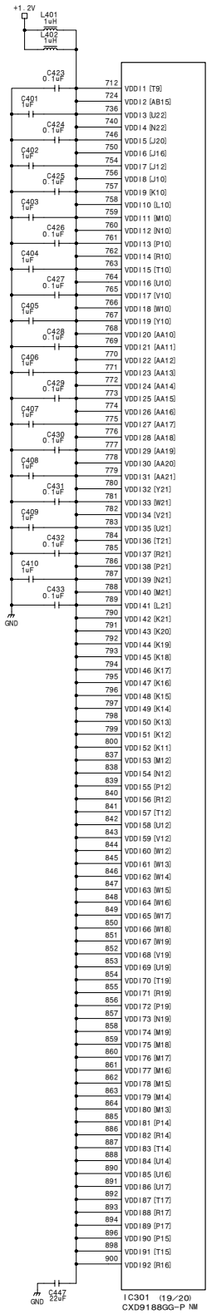


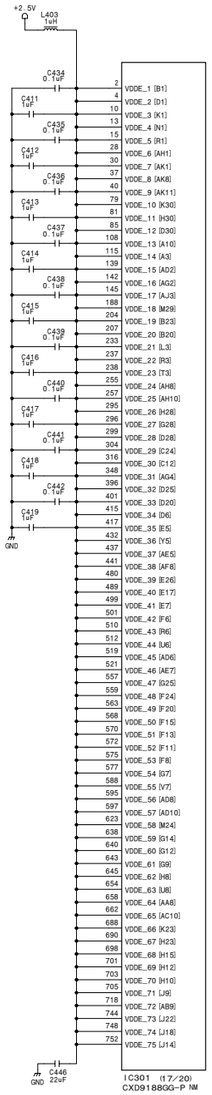

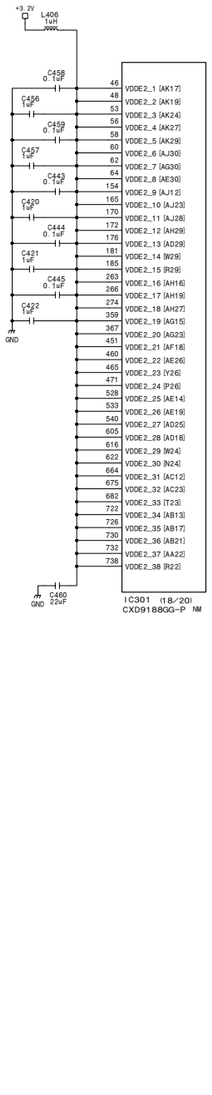

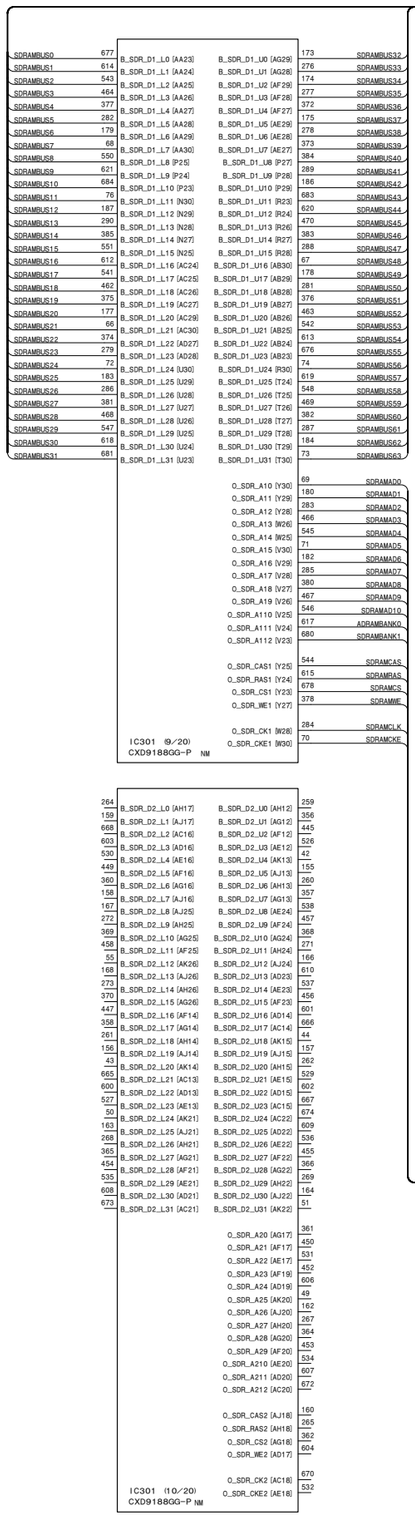

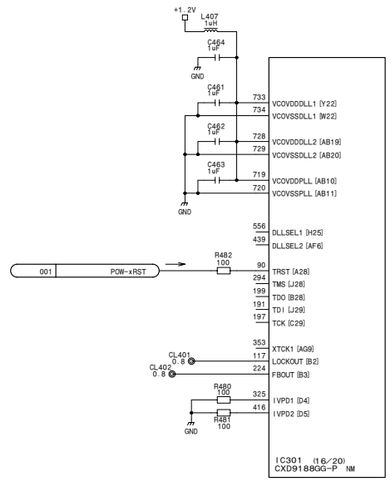

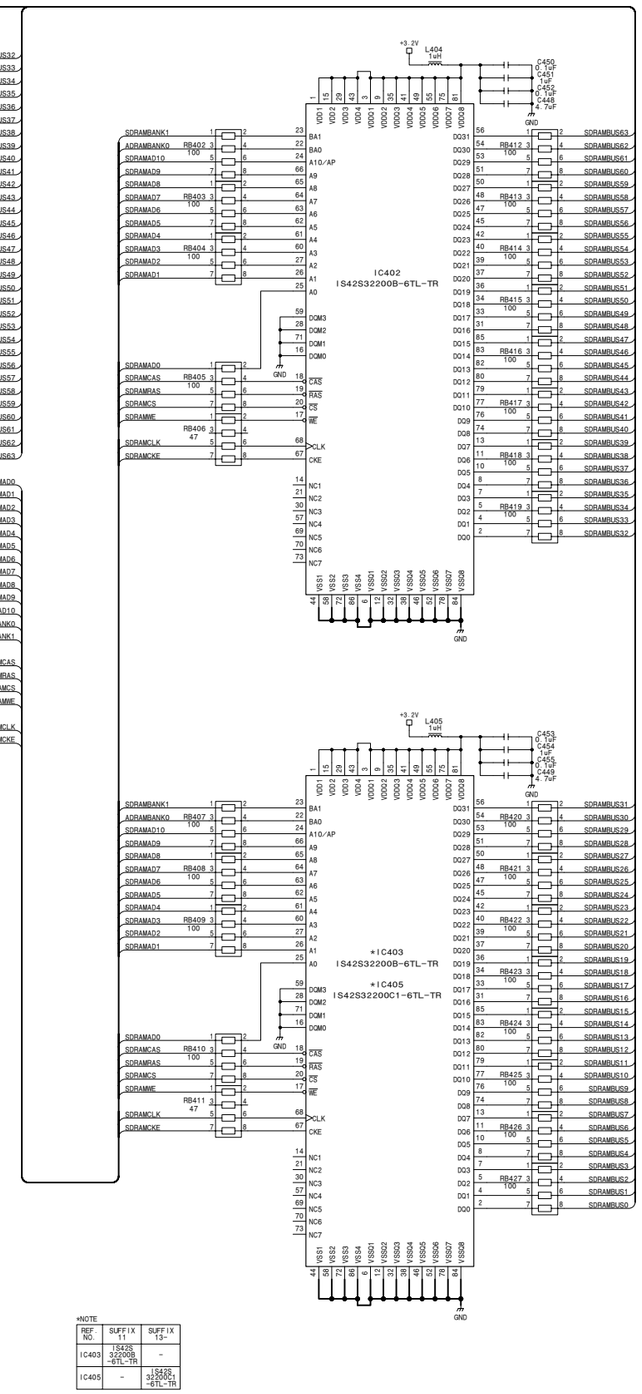


*NOTE

REF NO.	SUFFIX 11	SUFFIX 13-
IC403	IS42S 32200B -6TL-TR	-
IC405	-	IS42S 32200C1 -6TL-TR


DPR-265 (6/8)
BOARD NO. 1-865-929-11, 13, 14
HDC-1500_DPR-265_014_6

DPR-265 (7/8)
SUFFIX: -11, 13, 14

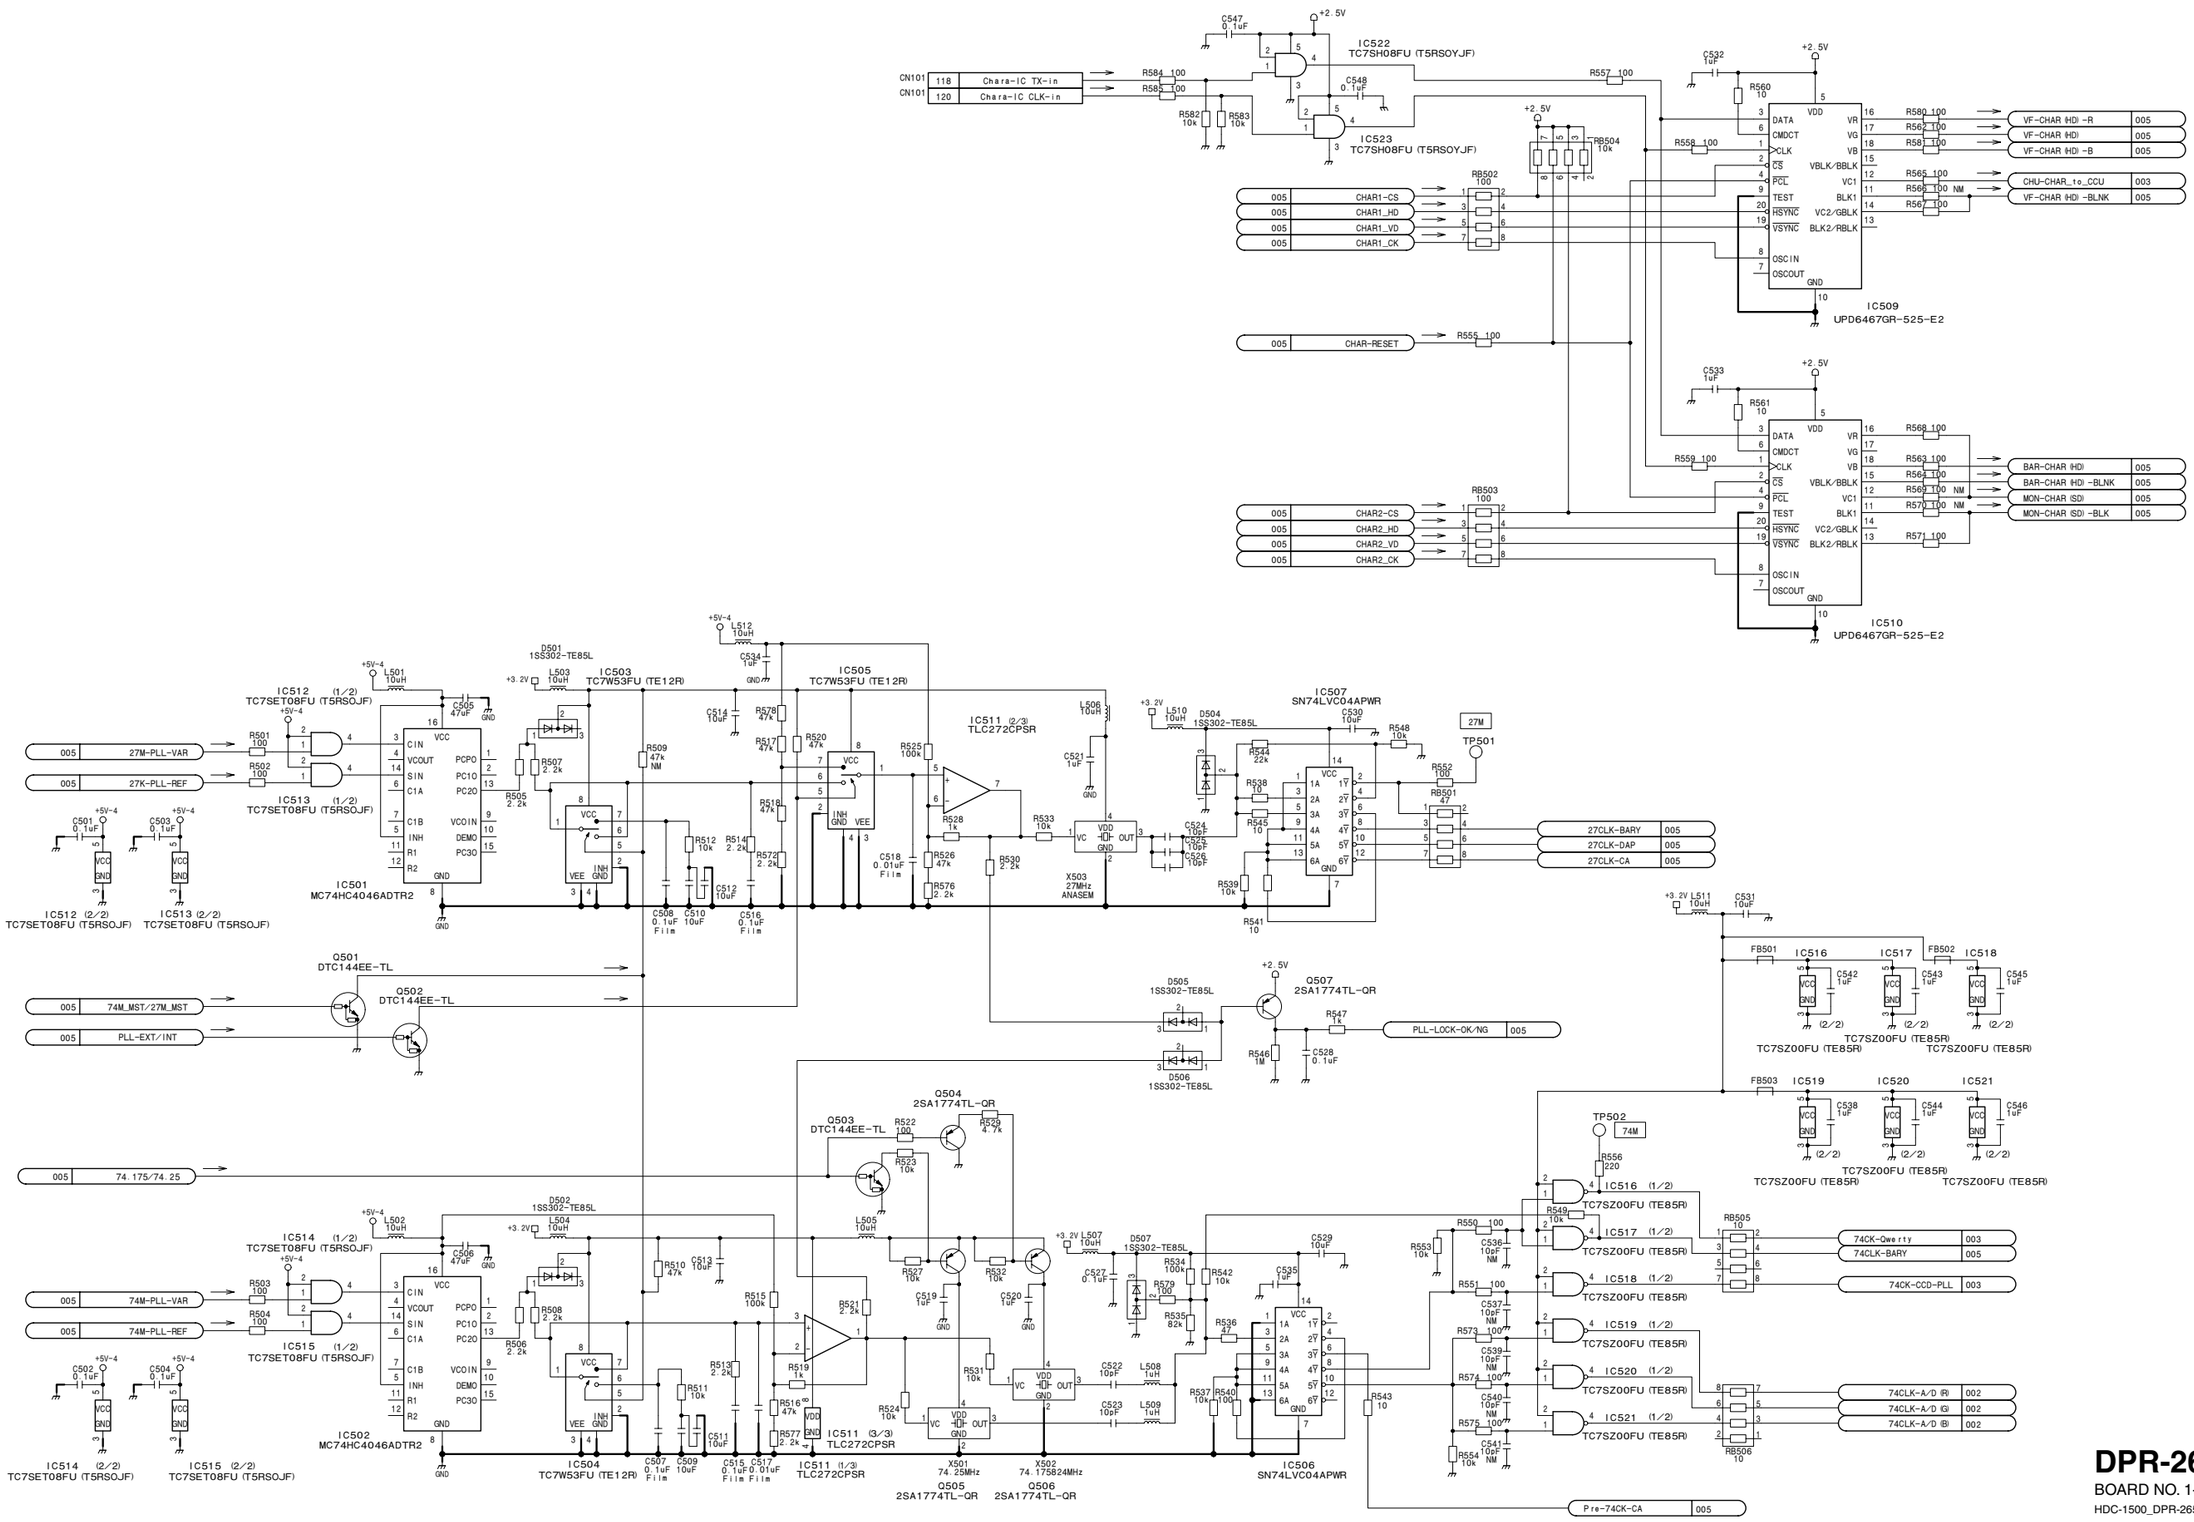

DPR-265 (7/8)
BOARD NO. 1-865-929-11, 13, 14
HDC-1500_DPR-265_012_7

DPR-265 (8/8)
SUFFIX: -11, 13, 14

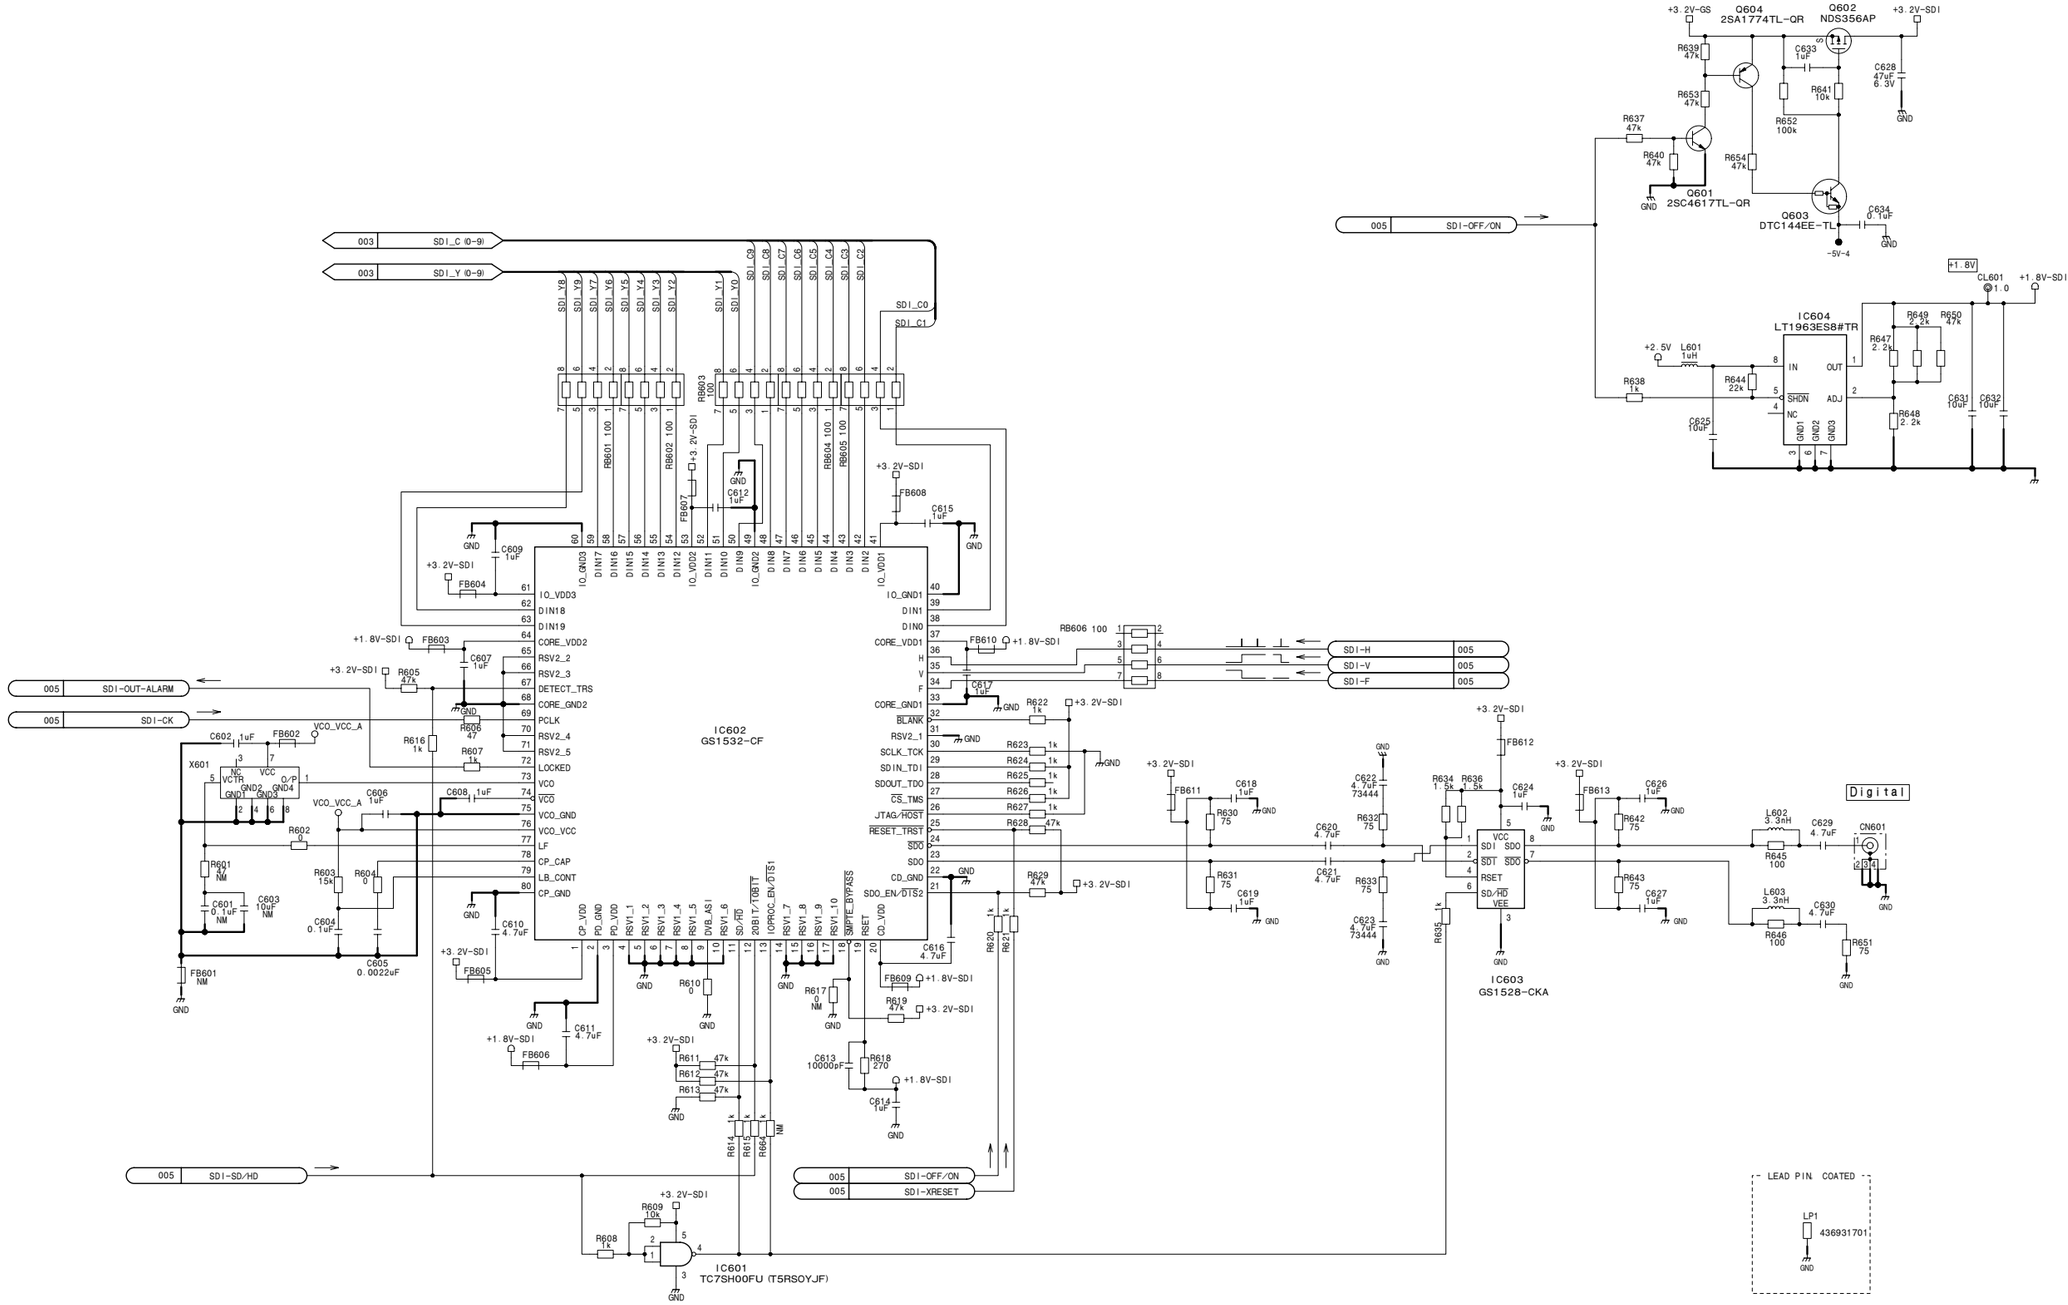


DPR-265 (8/8)

BOARD NO. 1-865-929-11, 13, 14


HDC-1500_DPR-265_012_8

DPR-265C (1/8)
SUFFIX: -14

DPR-264_200P (F) (to MB) -CN (1-794-239-11)

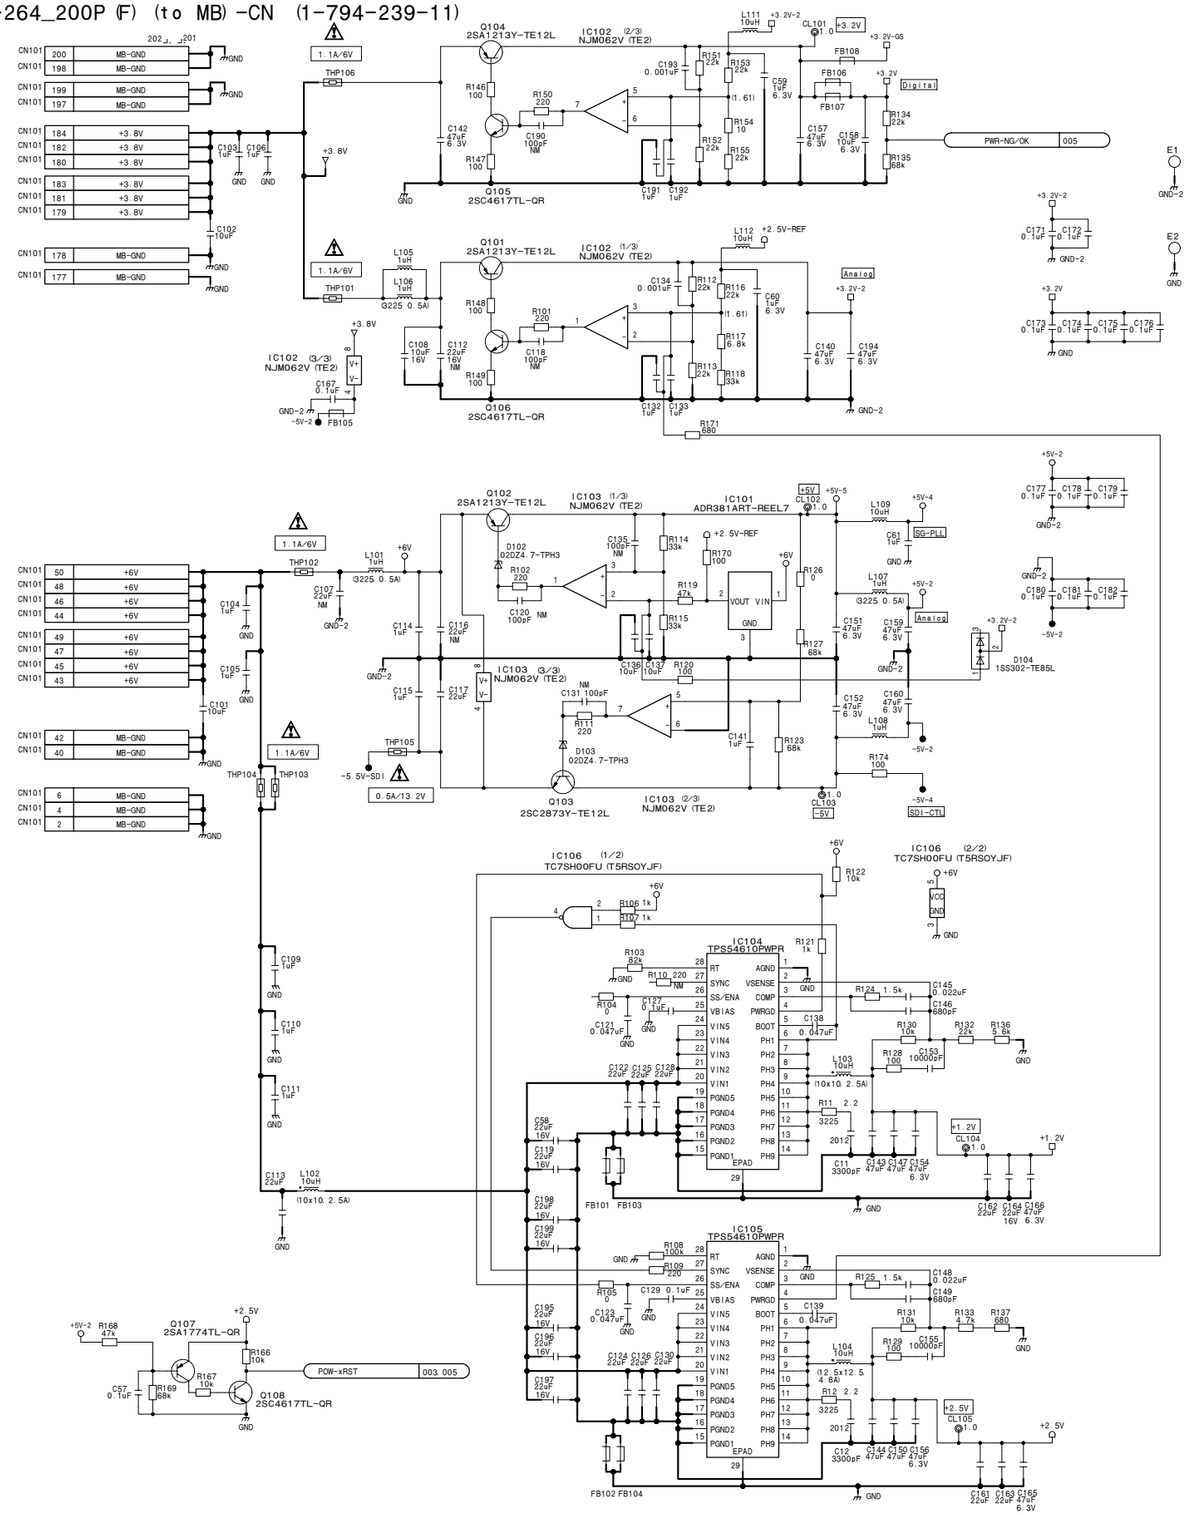



DPR-265_200P (M) (to SDI) -CN (1-794-452-11)

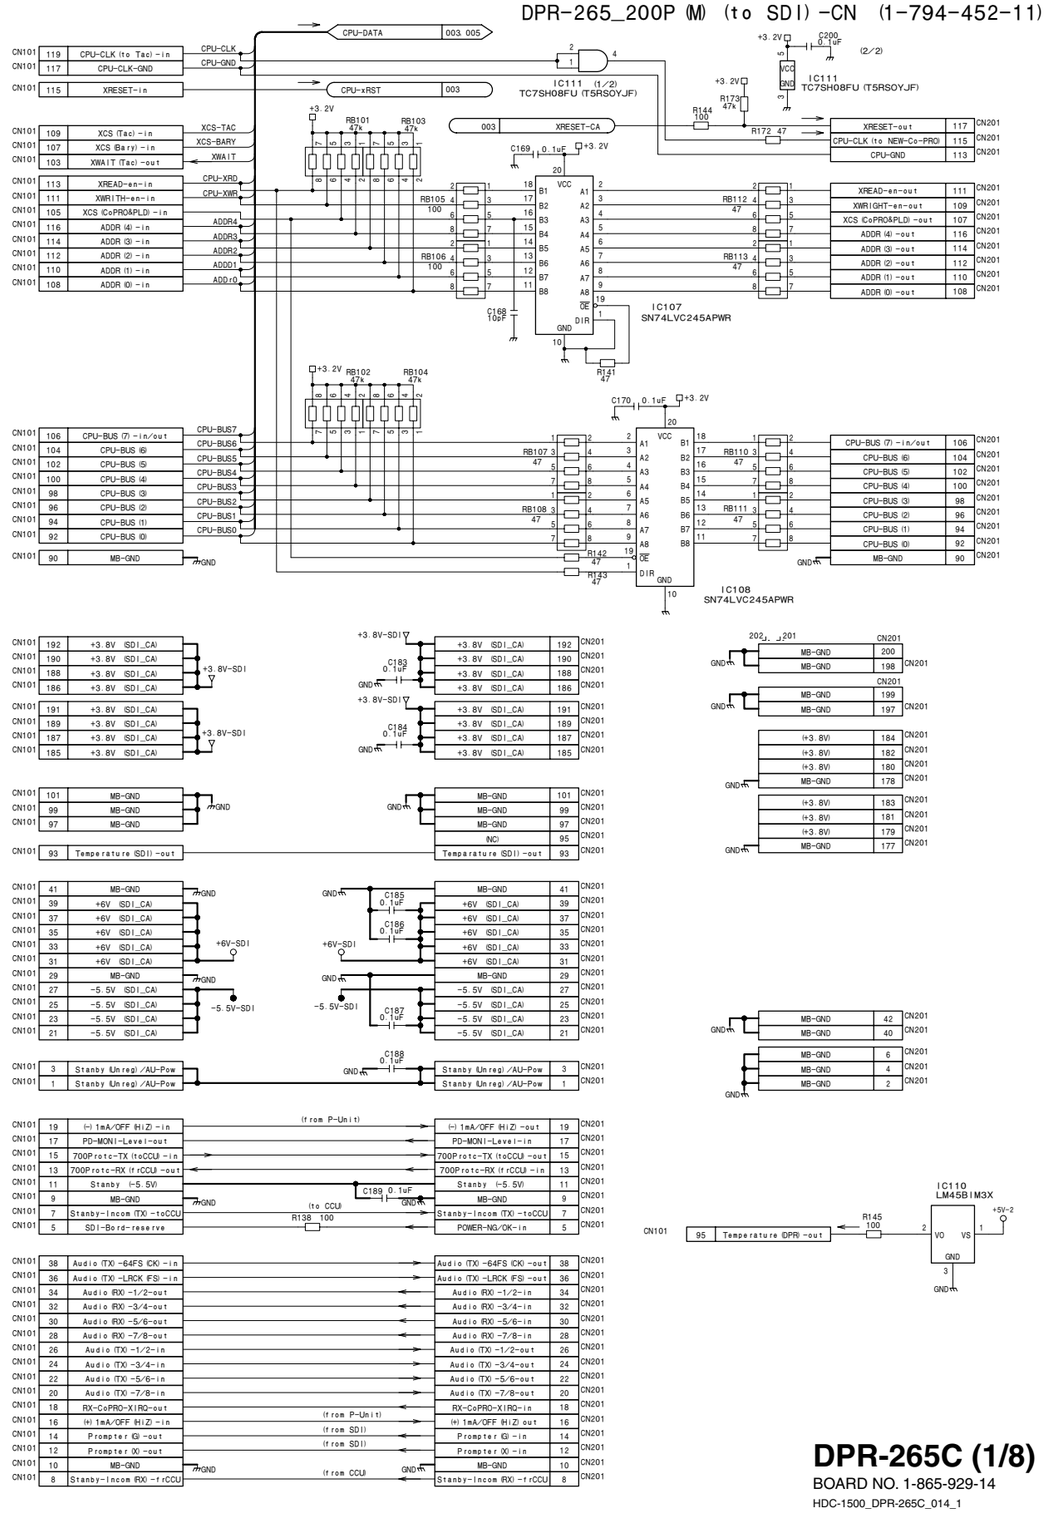



DPR-265C (1/8)
BOARD NO. 1-865-929-14
HDC-1500_DPR-265C_014_1


DPR-265C (2/8)
SUFFIX: -14

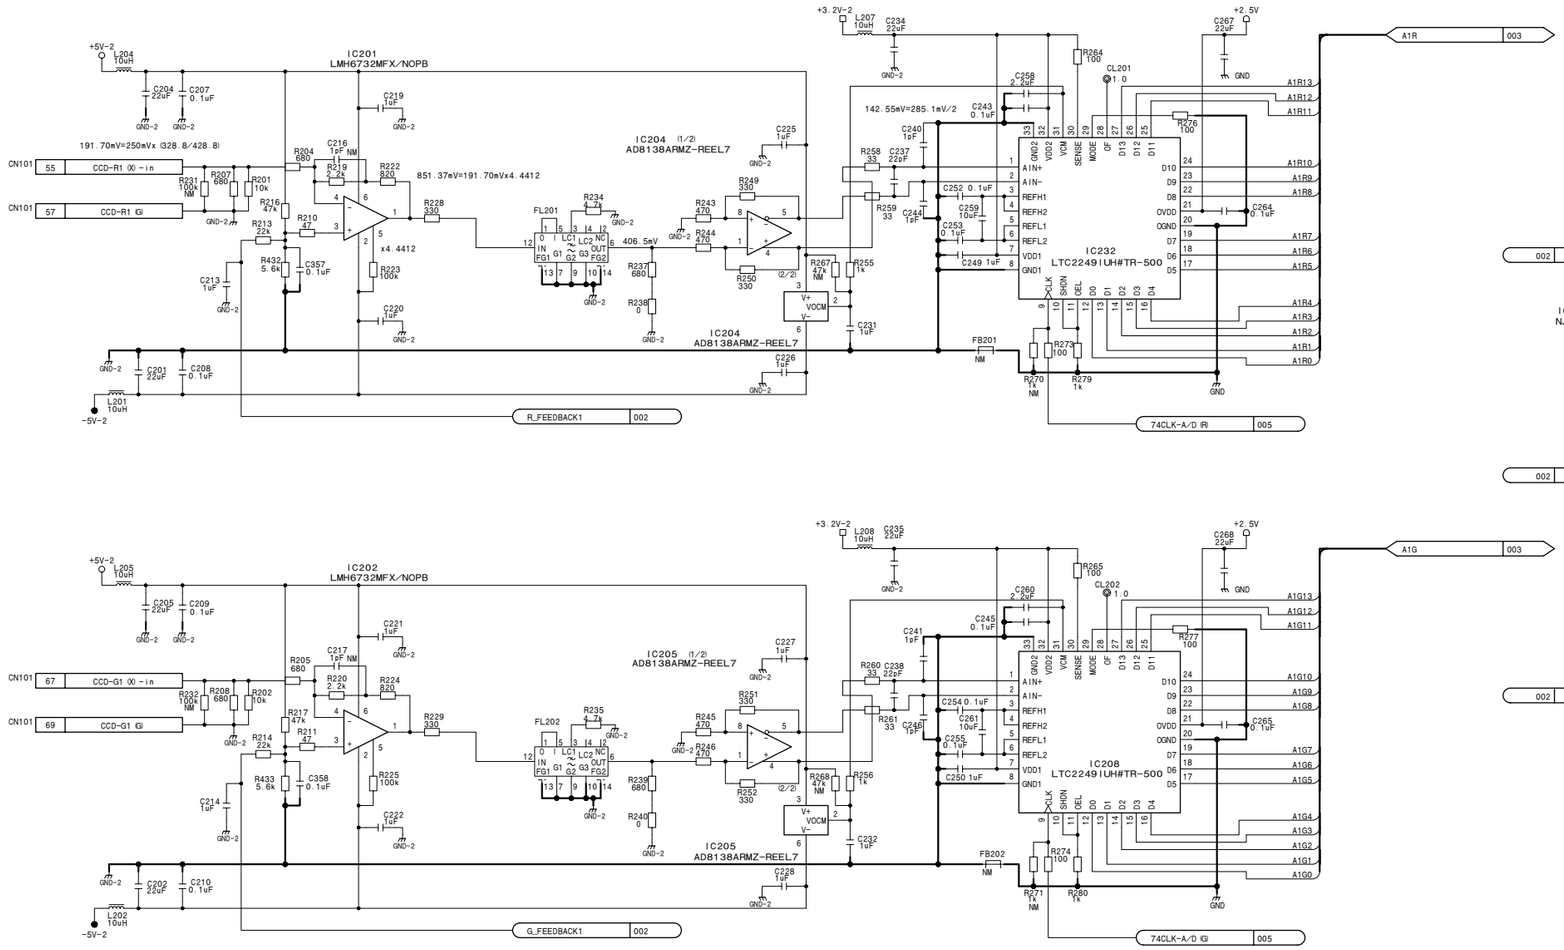

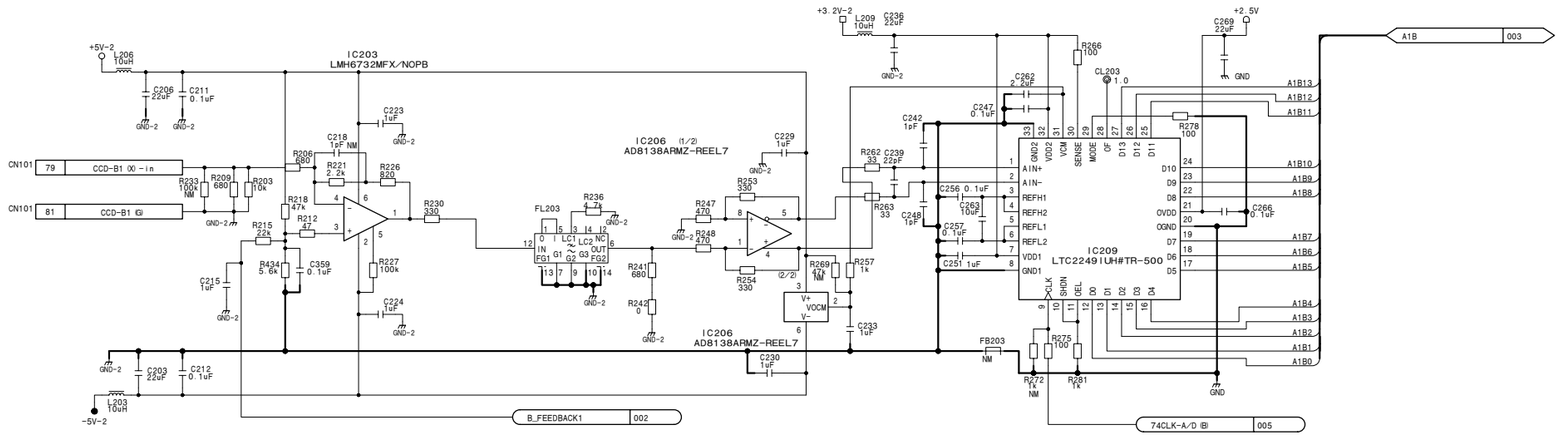


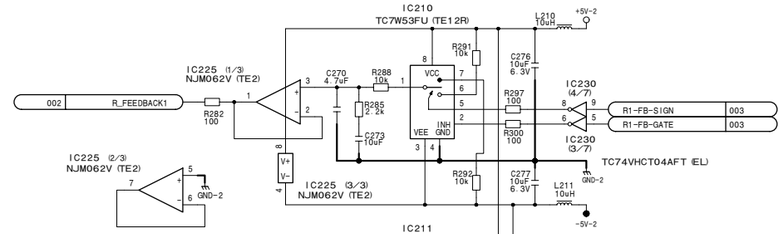

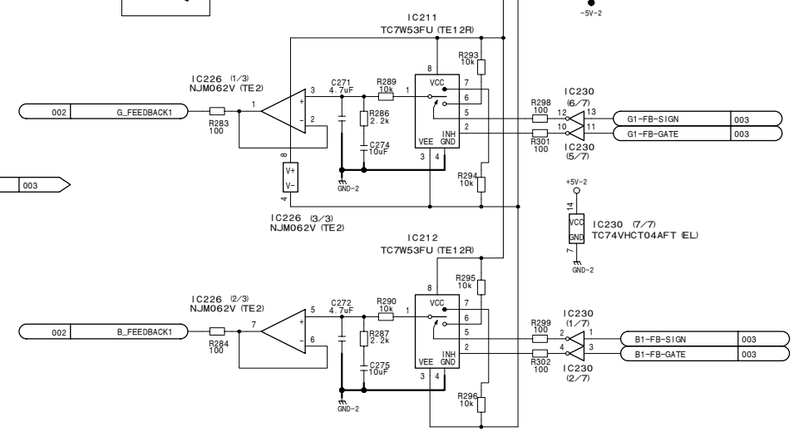

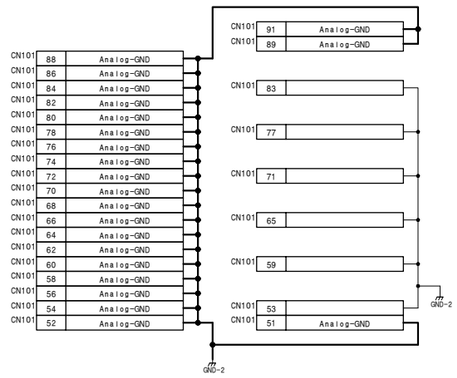



4-50

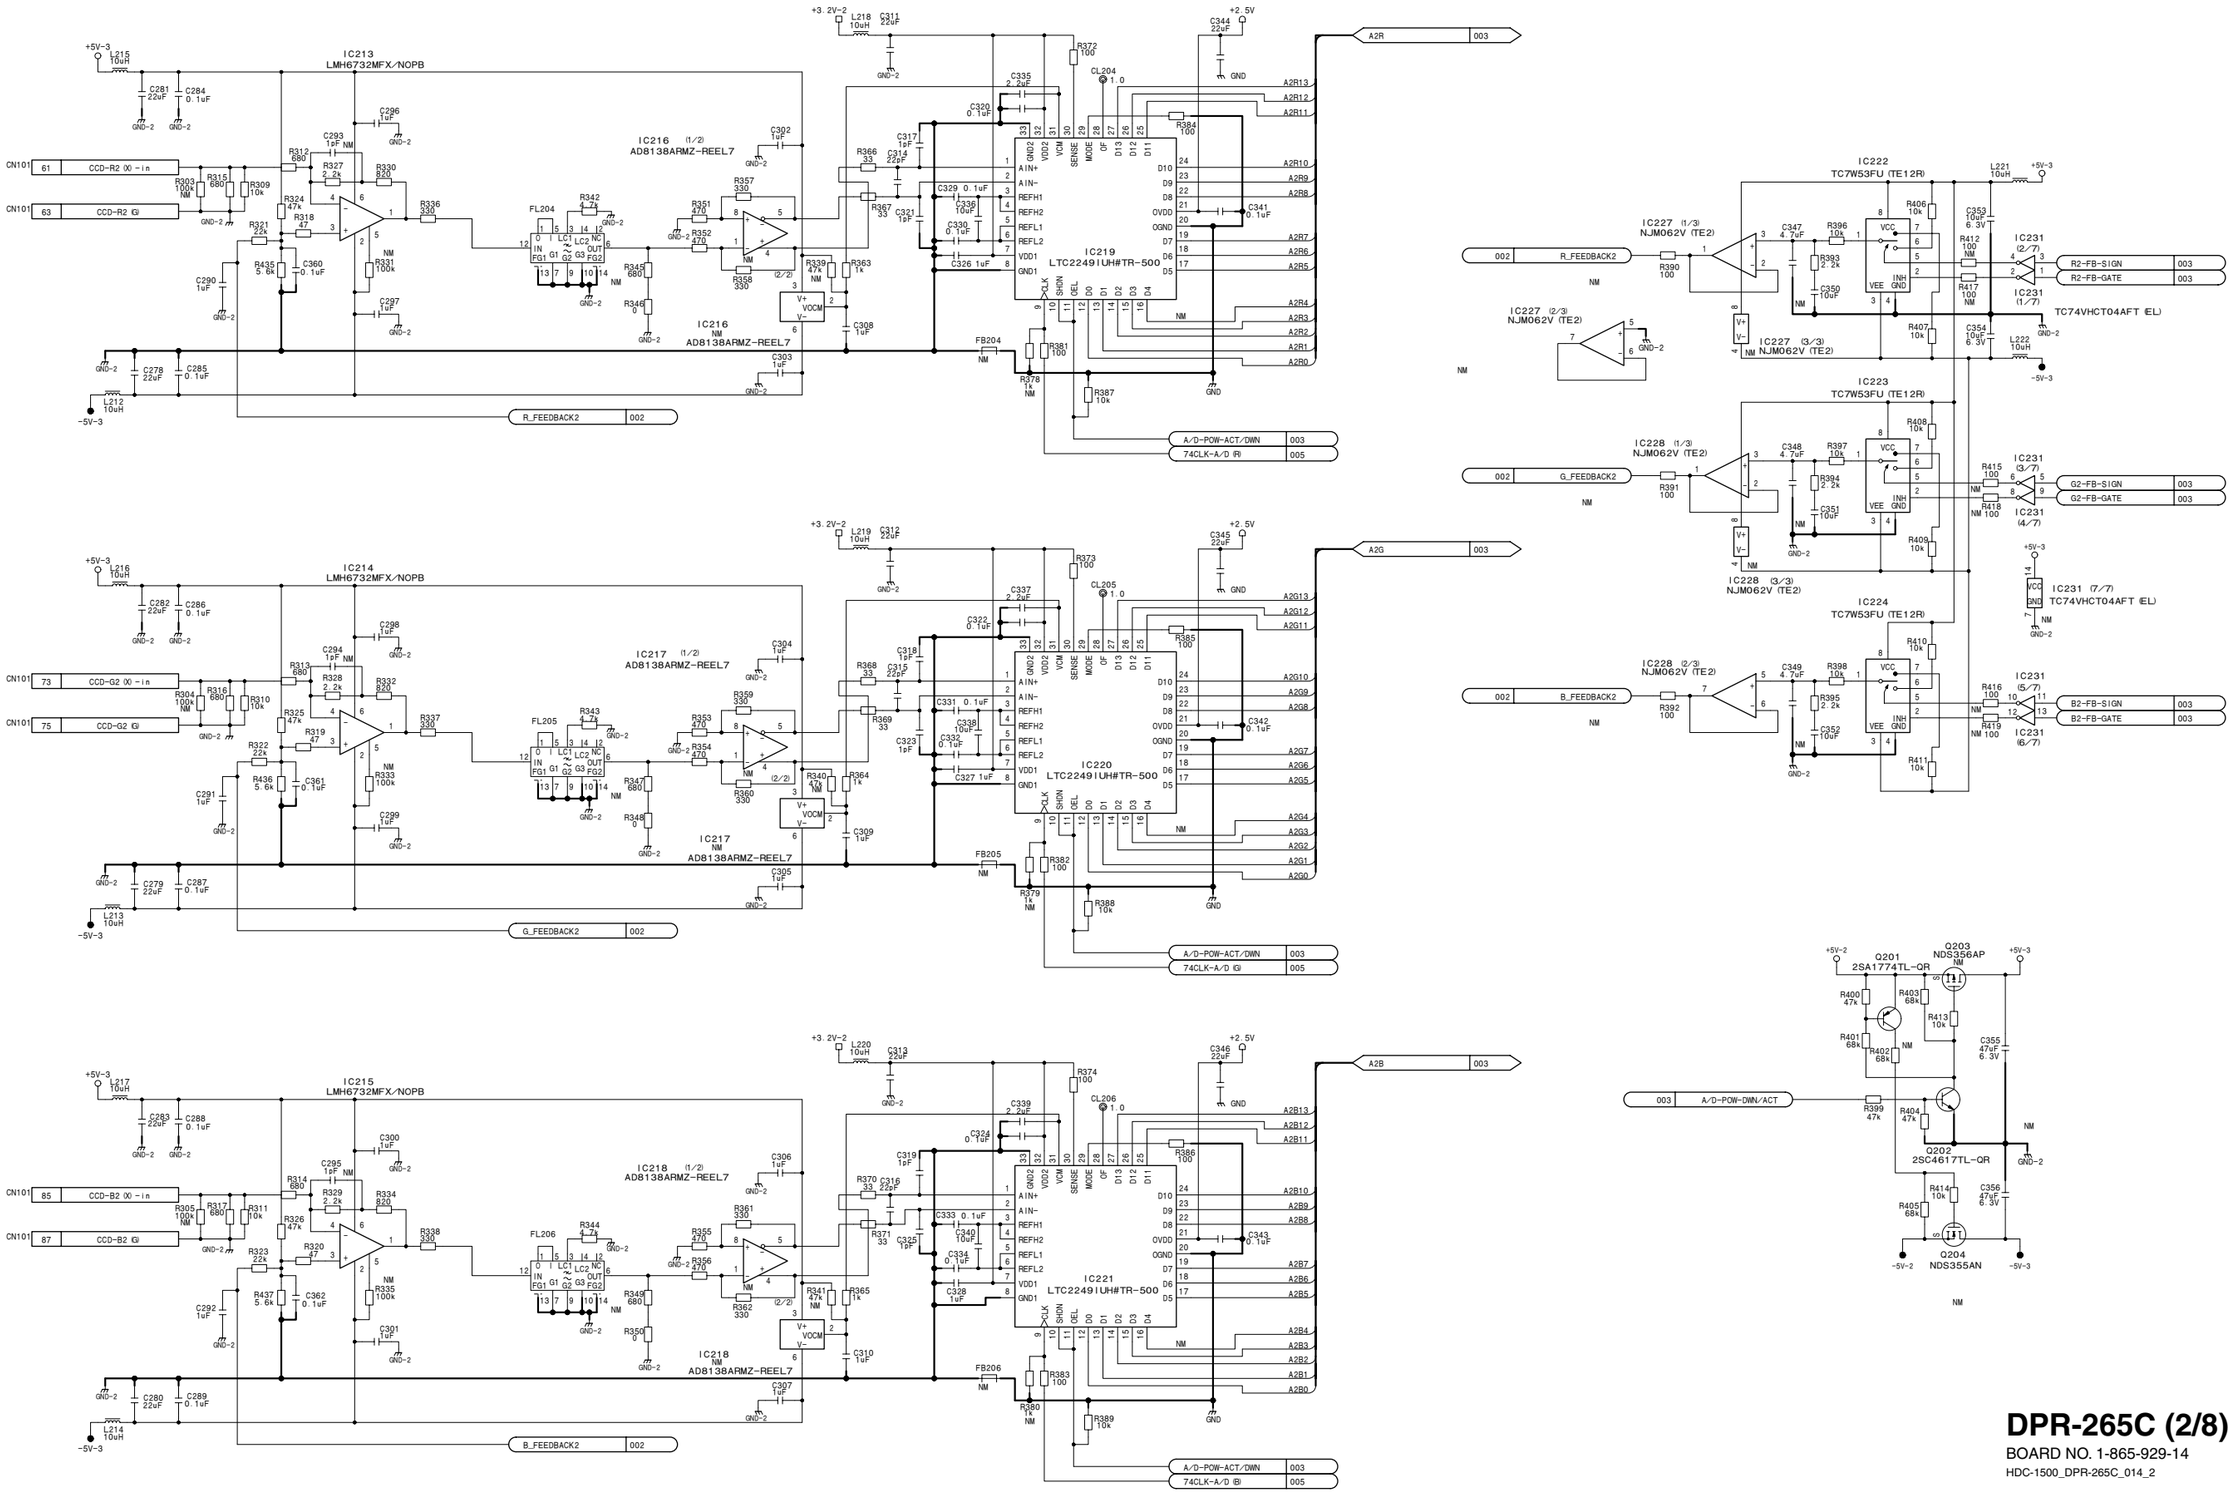



DPR-265C (2/8)
BOARD NO. 1-865-929-14
HDC-1500_DPR-265C_014_2


DPR-265C (3/8)
SUFFIX: -14

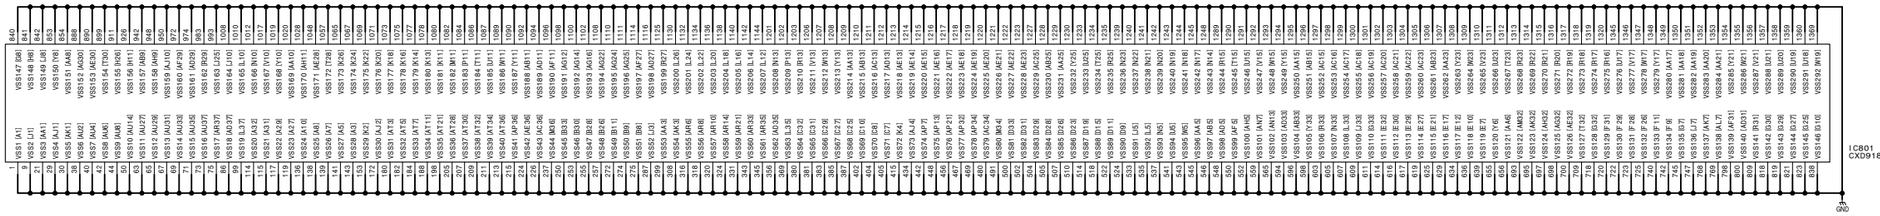

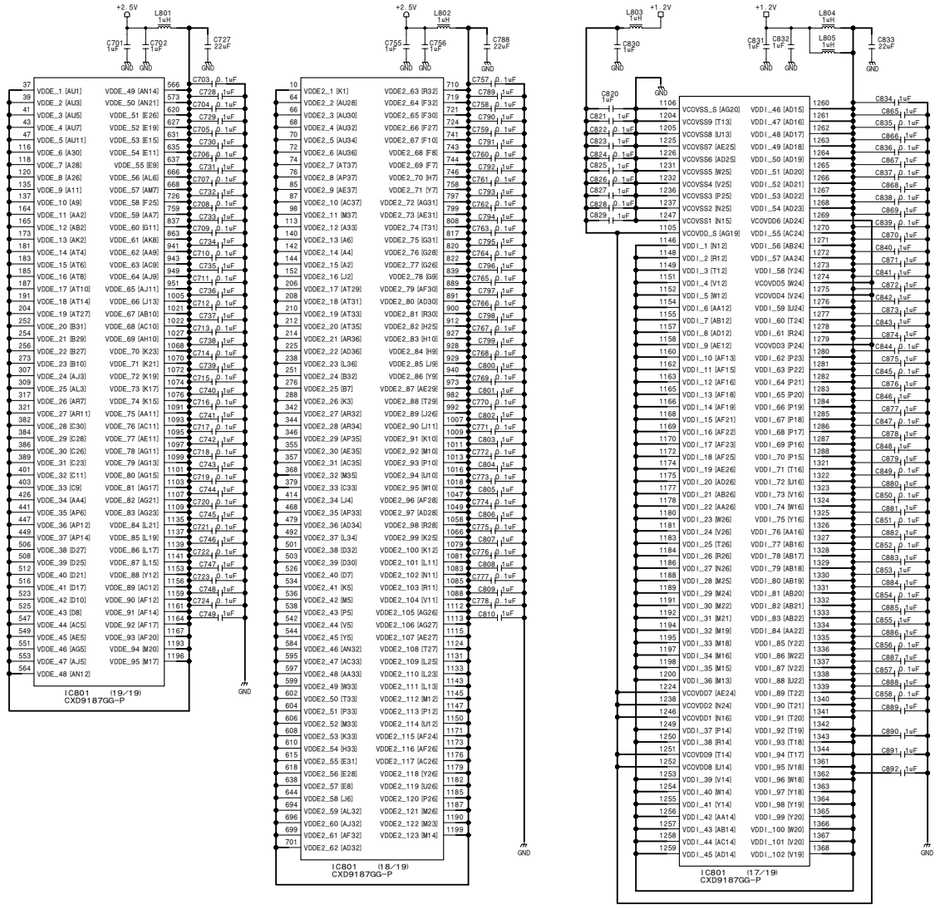

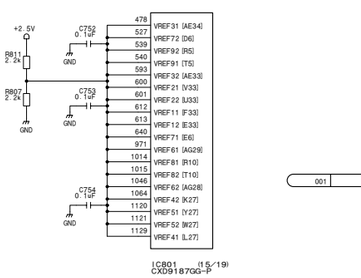

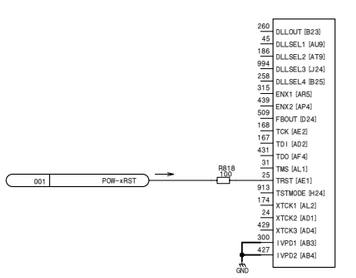


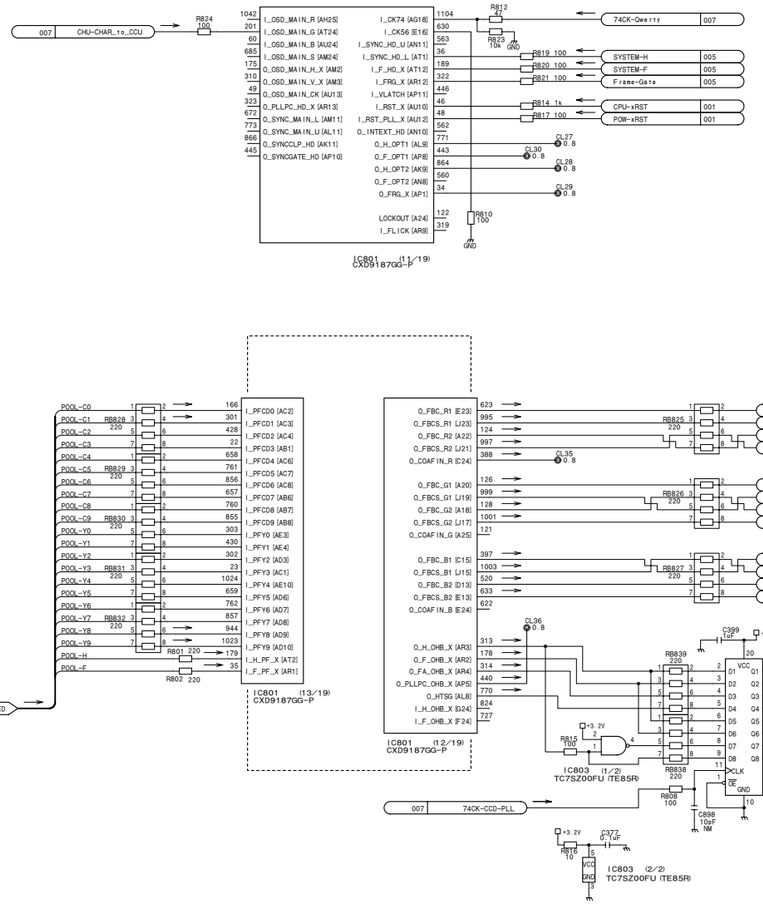

005
POOL-FEED
IC801 (13/19)
CXD9187GG-P
IC801 (12/19)
CXD9187GG-P
R801 220
R802 220
R812 47
R823 10k
R810 100
R815 100
R876 10
R808 100
C898 10uF NM
C399 10uF
C835 0.8
C836 0.8
C837 0.8
C838 0.8
C839 0.8
C840 0.8
C841 0.8
C842 0.8
C843 0.8
C844 0.8
C845 0.8
C846 0.8
C847 0.8
C848 0.8
C849 0.8
C850 0.8
C851 0.8
C852 0.8
C853 0.8
C854 0.8
C855 0.8
C856 0.8
C857 0.8
C858 0.8
C859 0.8
C890 0.8
C891 0.8
C892 0.8


DPR-265C (3/8)
SUFFIX: -14

DPR-265C (3/8)
SUFFIX: -14

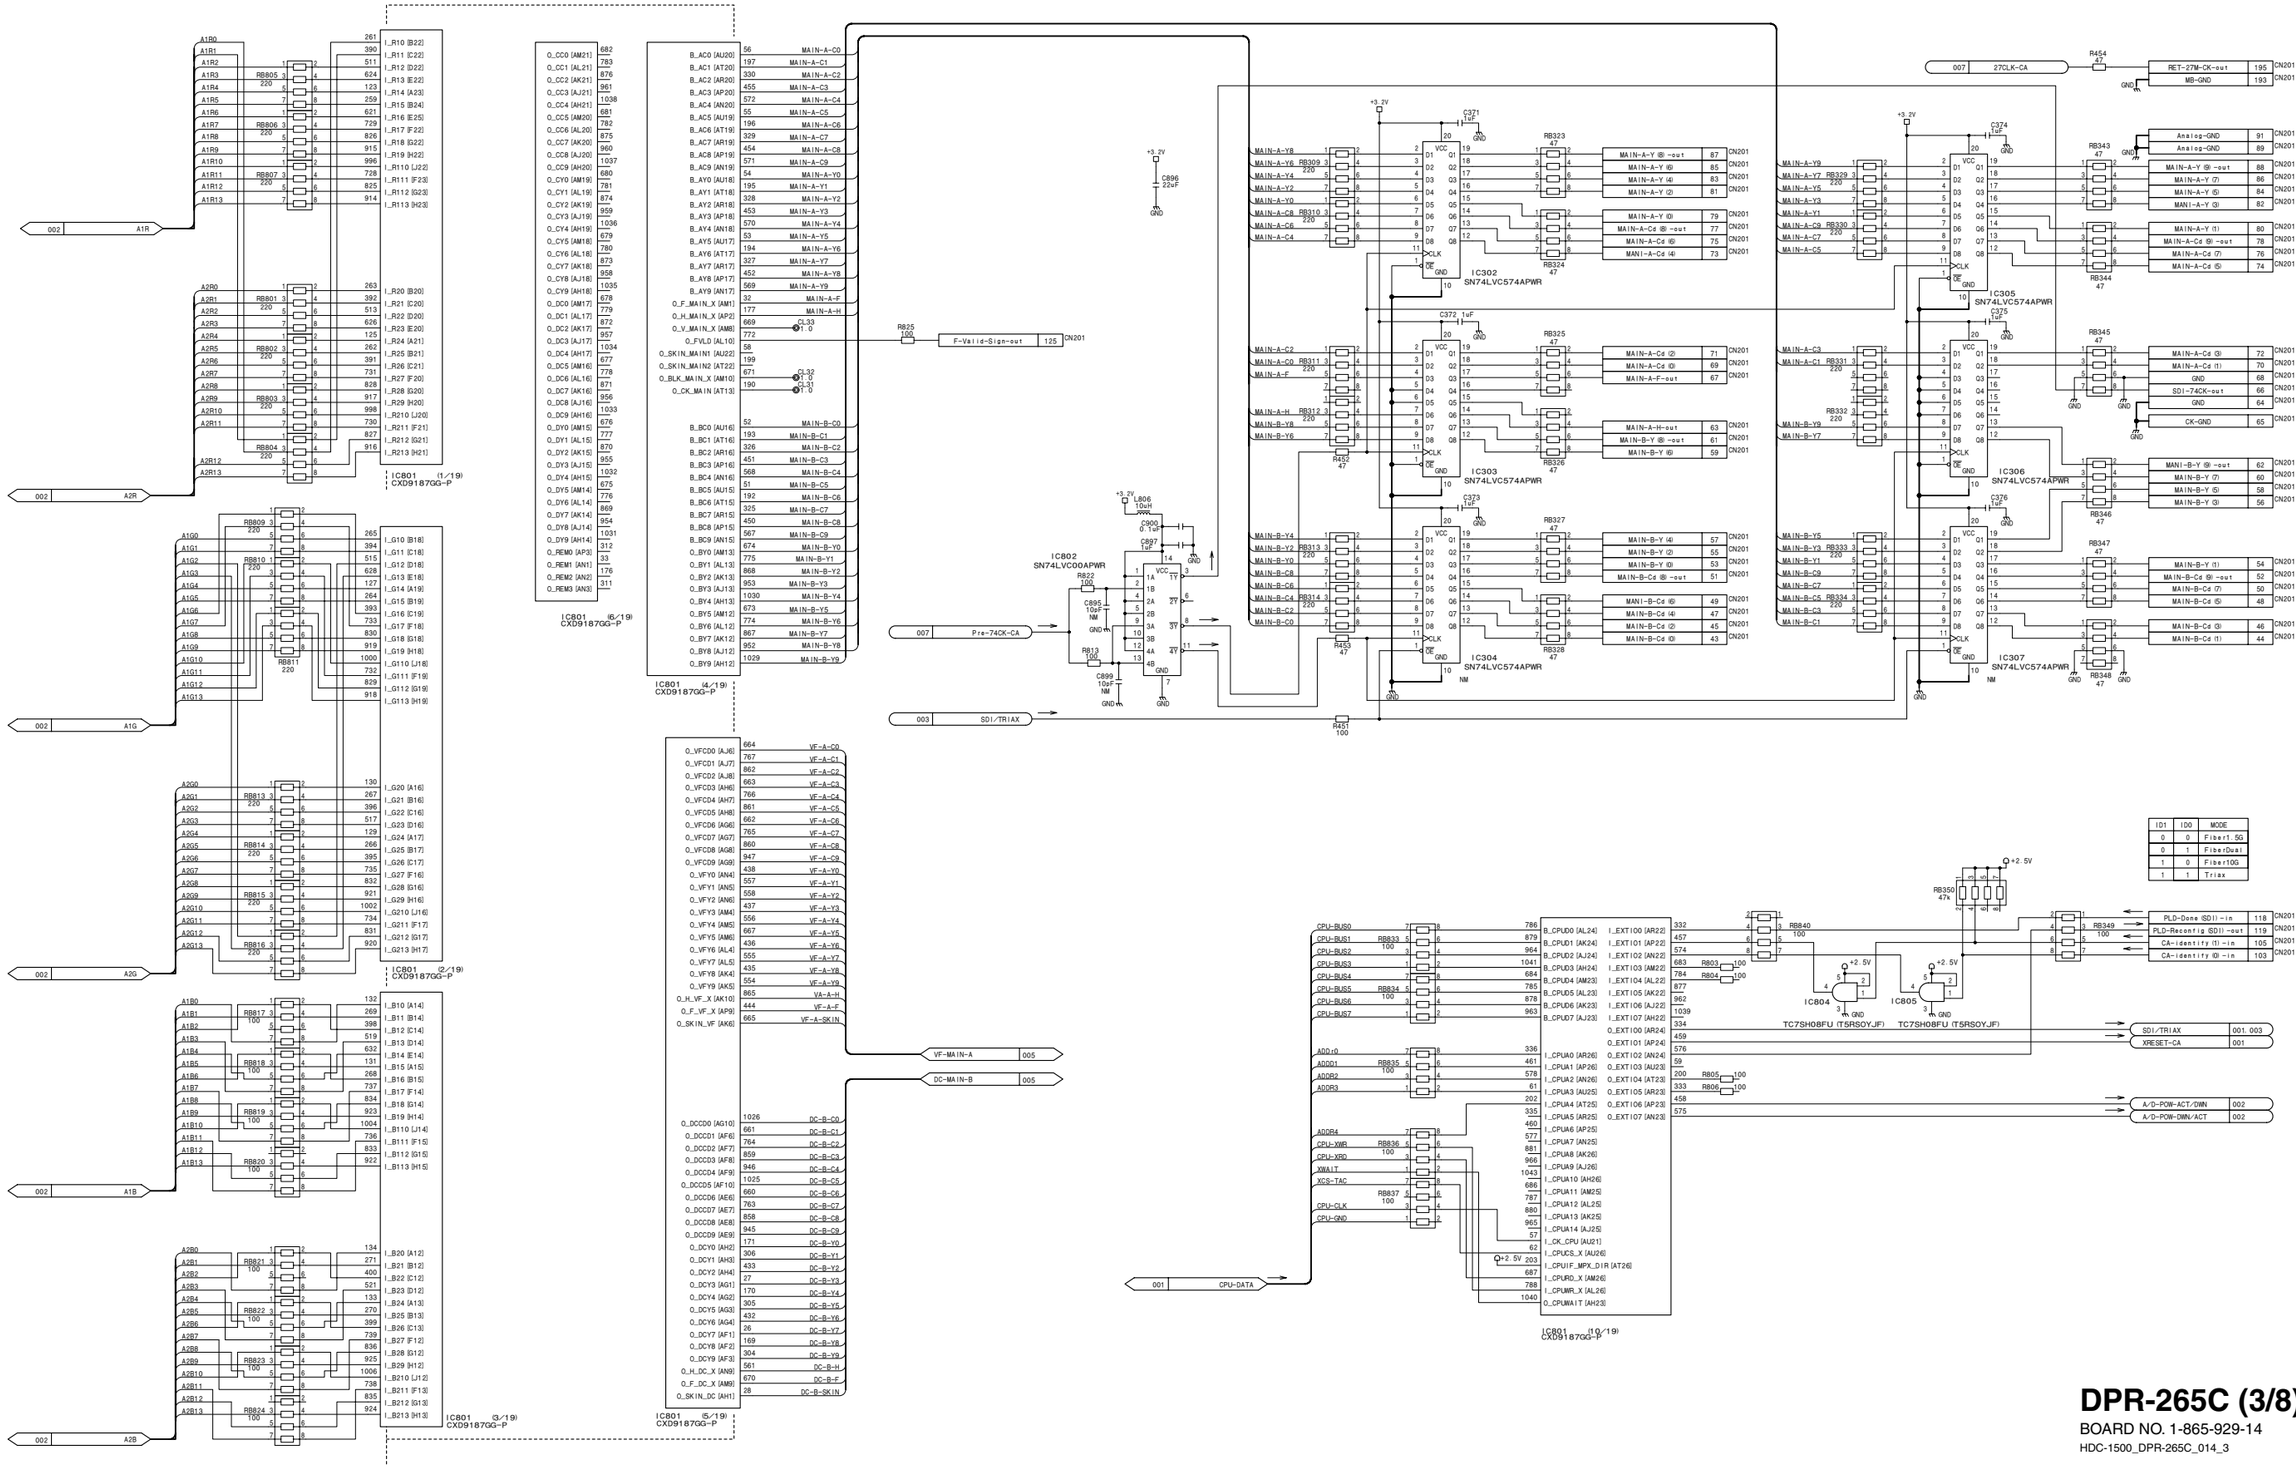


DPR-265C (3/8)
BOARD NO. 1-865-929-14
HDC-1500_DPR-265C_014_3

DPR-265C (4/8)
SUFFIX: -14

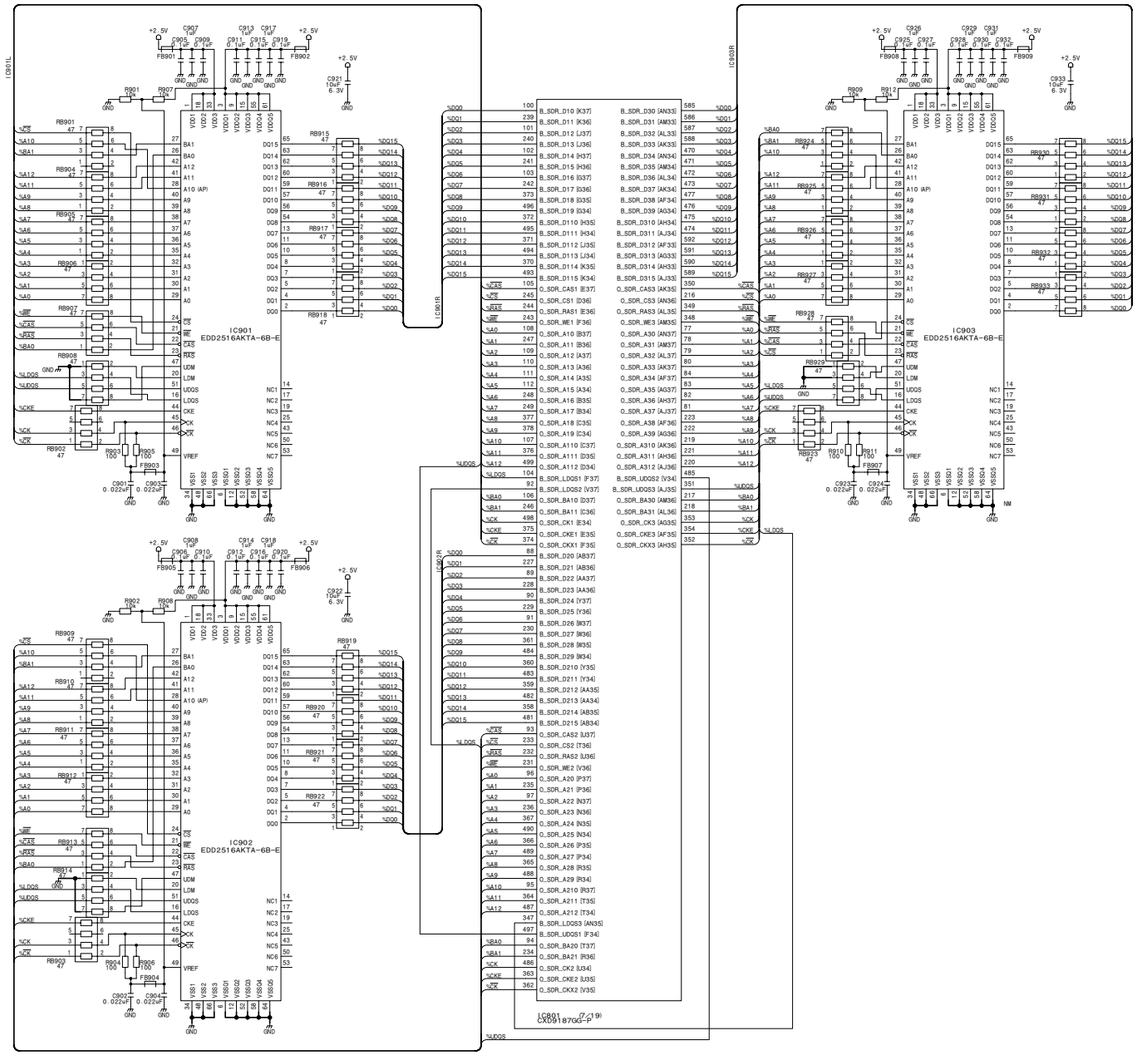


4-54


DPR-265C (4/8) **SUFFIX: -14**

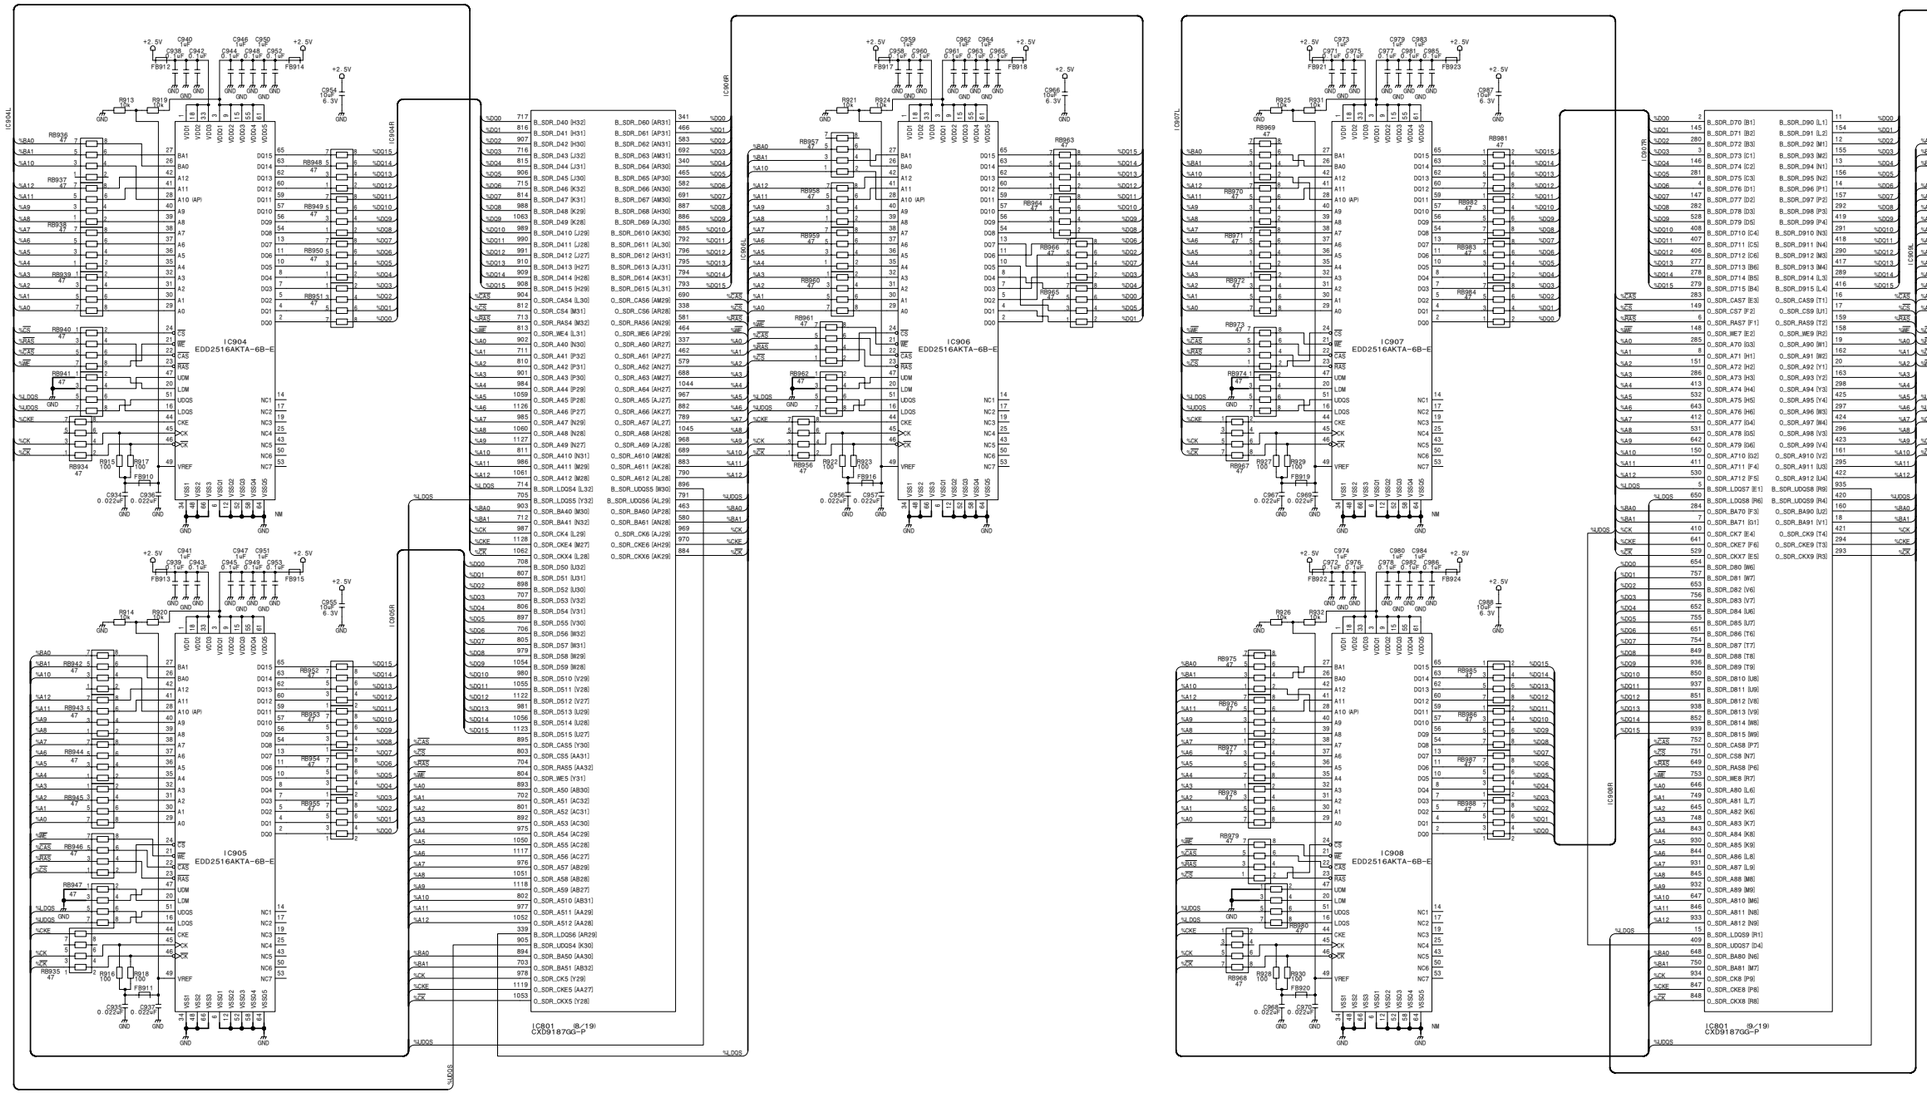


DPR-265C (4/8)
BOARD NO. 1-865-929-14
HDC-1500_DPR-265C_014_4

DPR-265C (5/8)
SUFFIX: -14

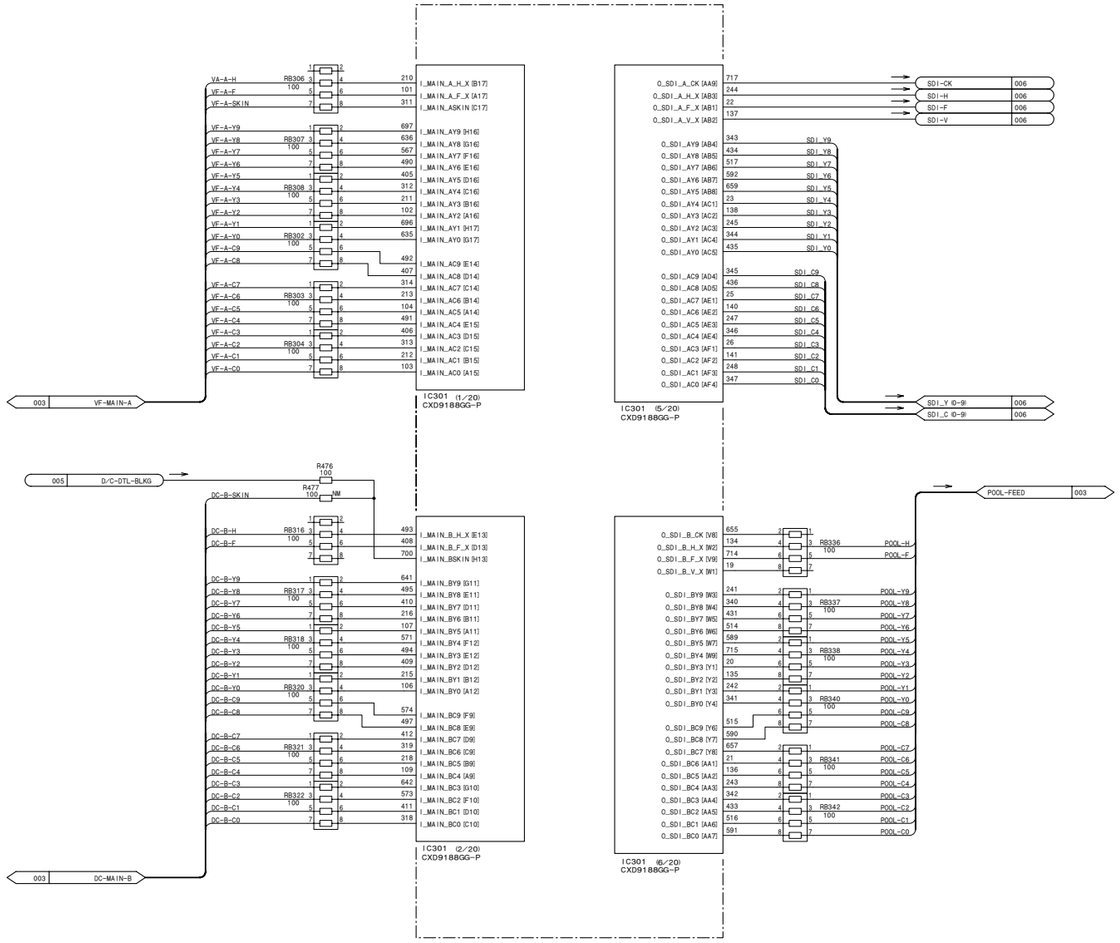

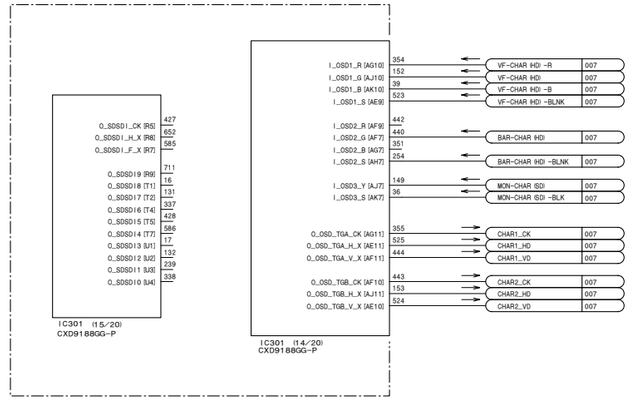



4-56

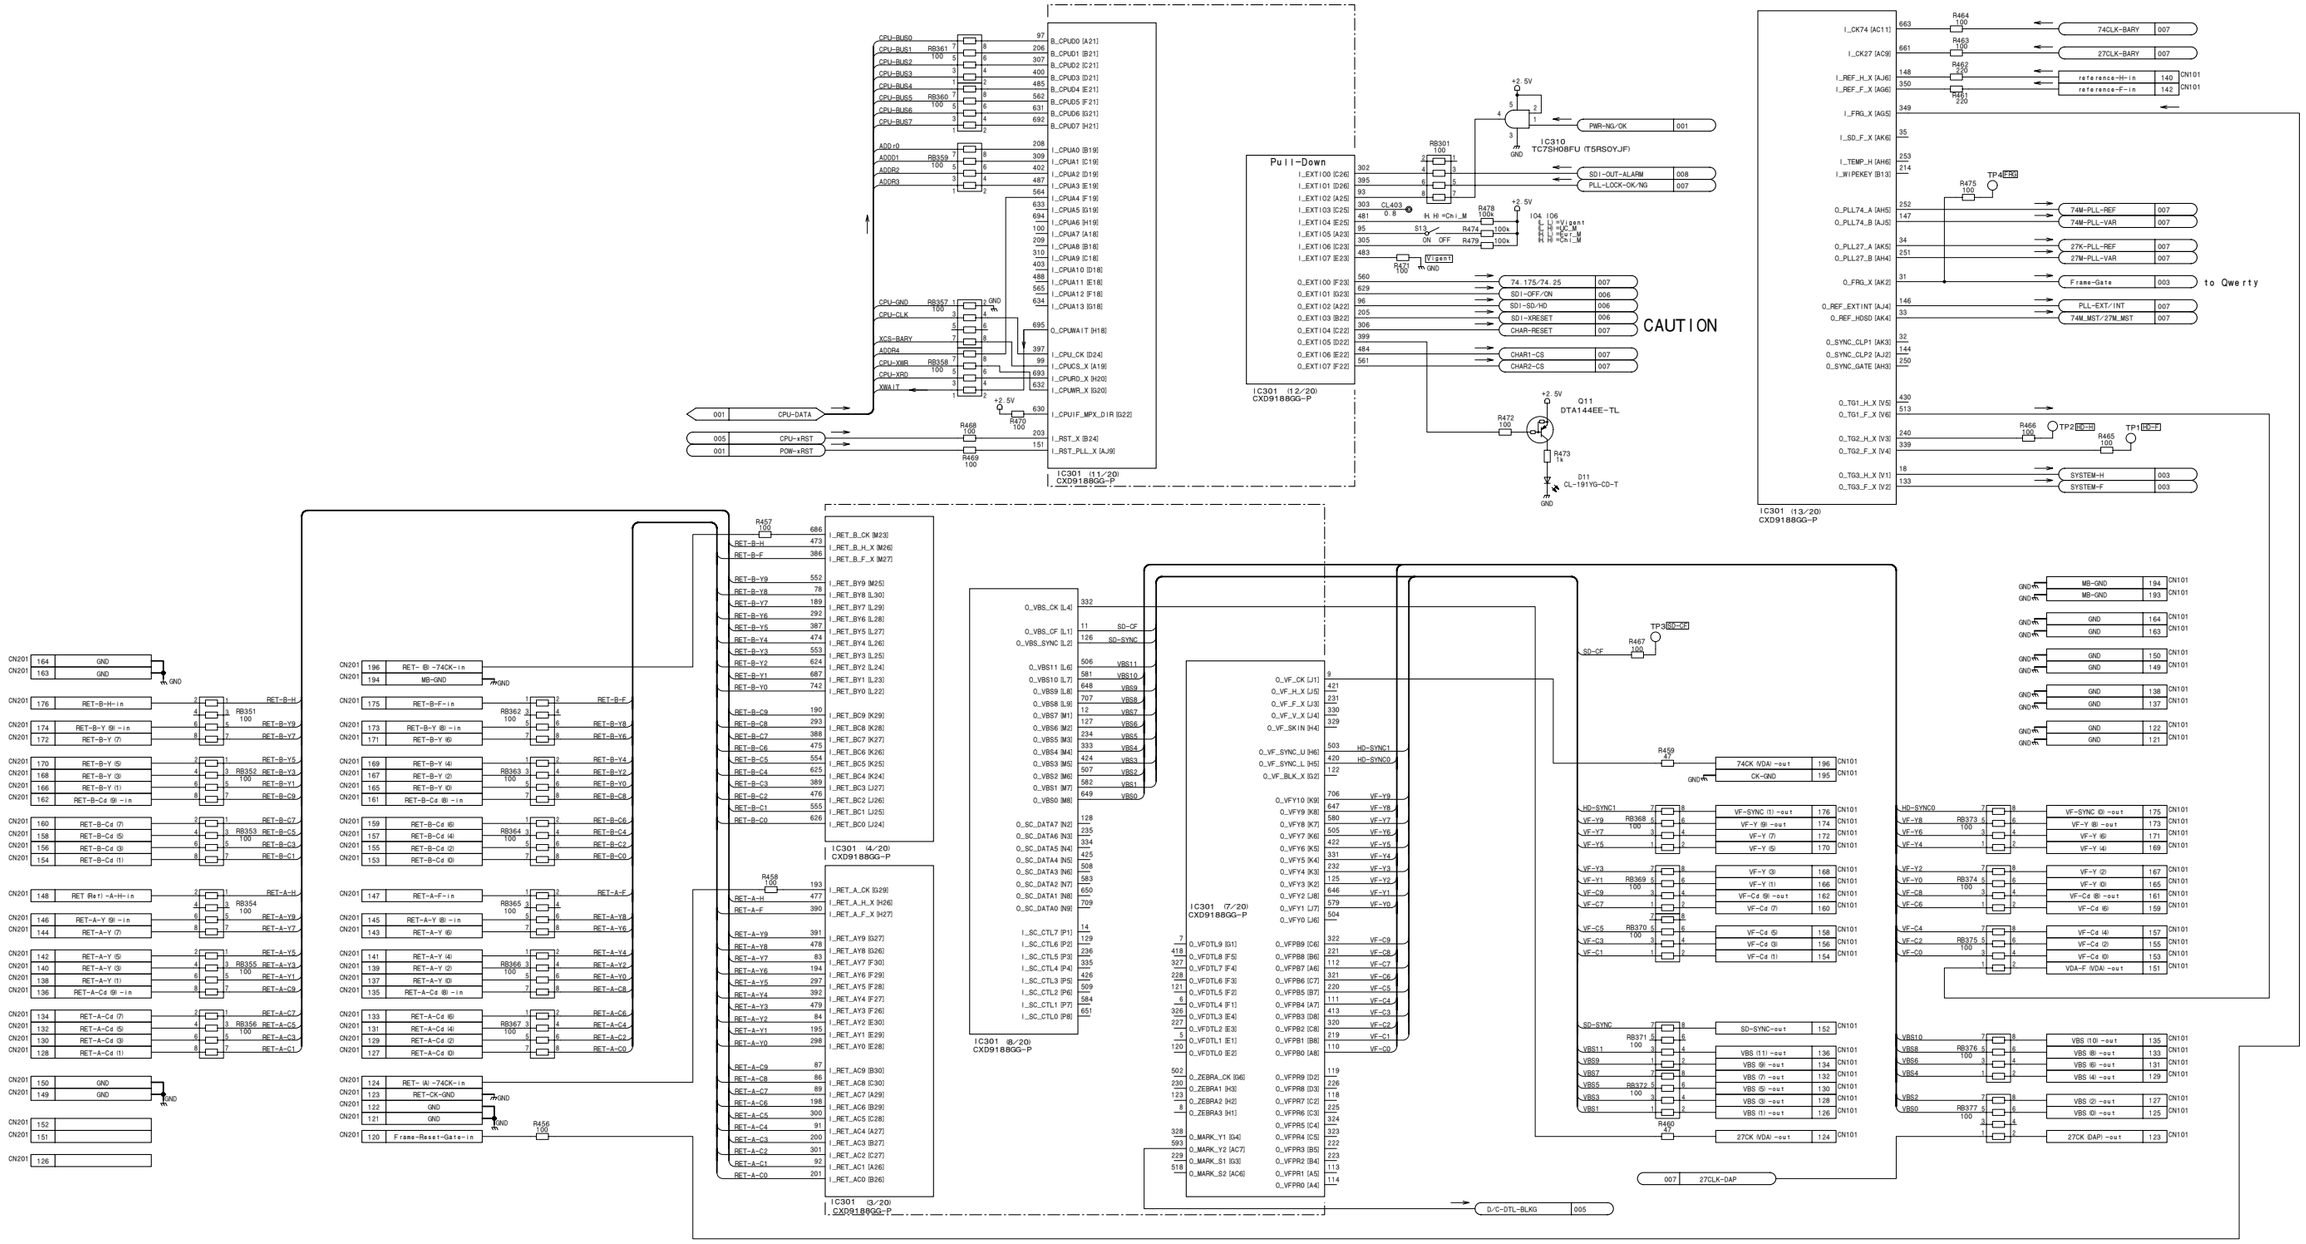



DPR-265C (5/8)
BOARD NO. 1-865-929-14
HDC-1500_DPR-265C_014_5


DPR-265C (6/8)
SUFFIX: -14

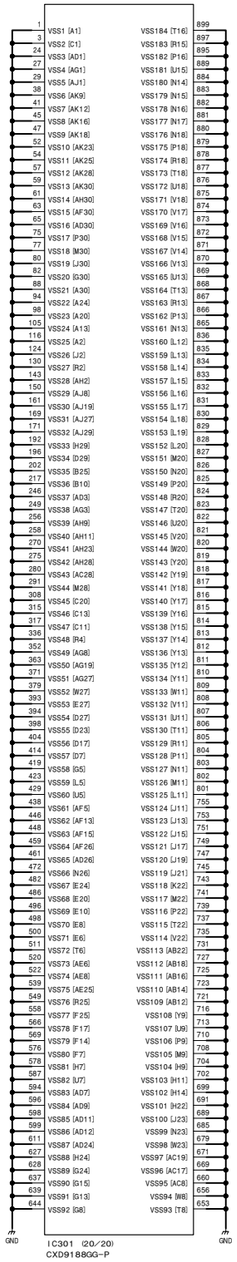


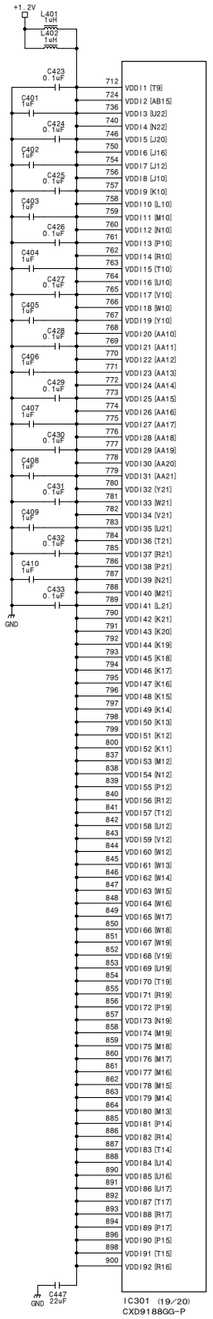


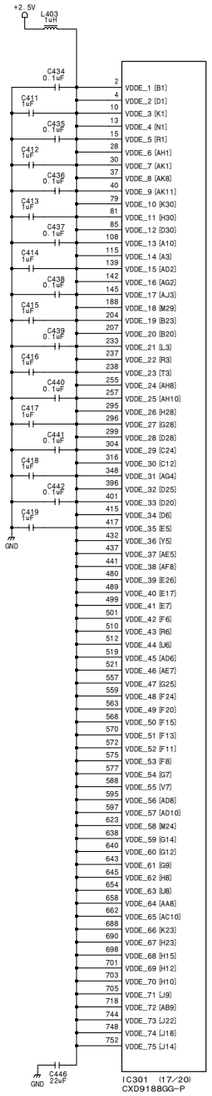

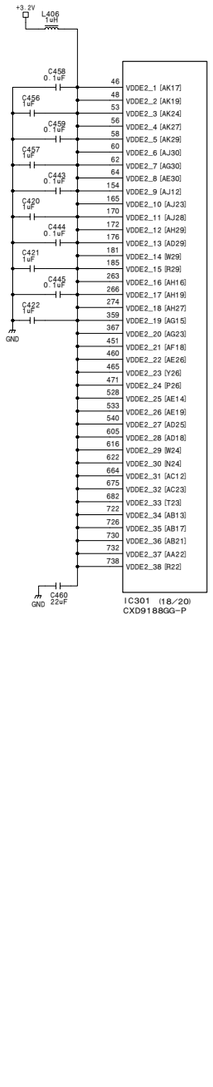

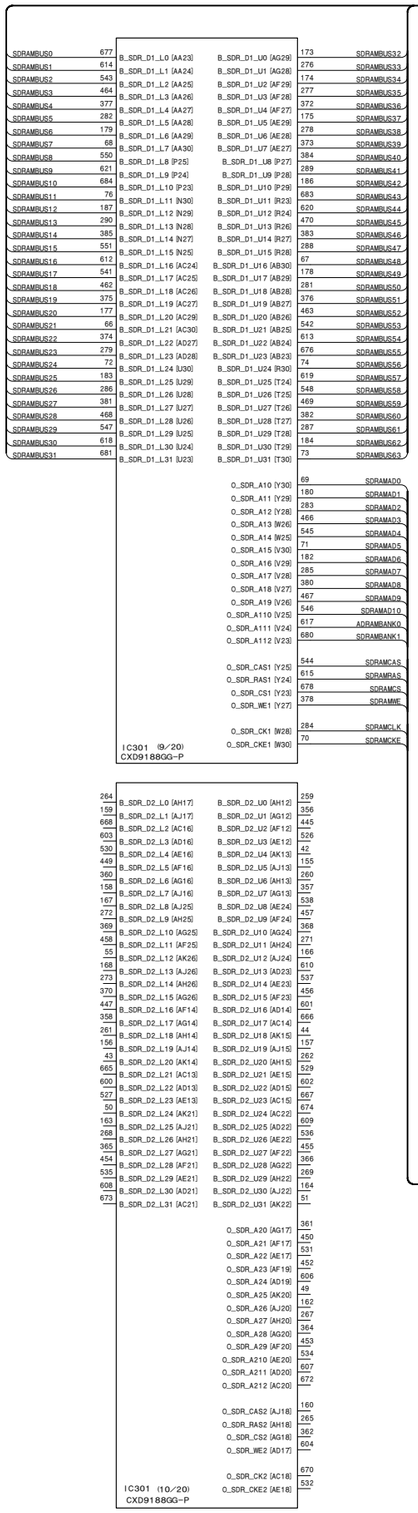

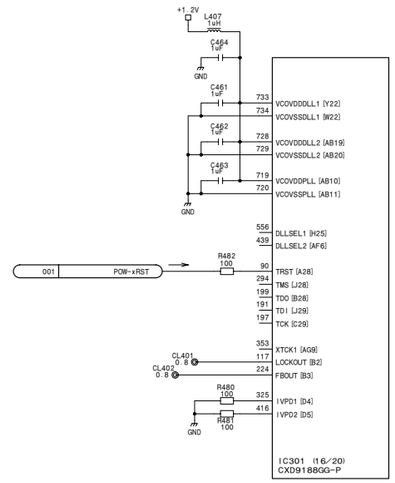

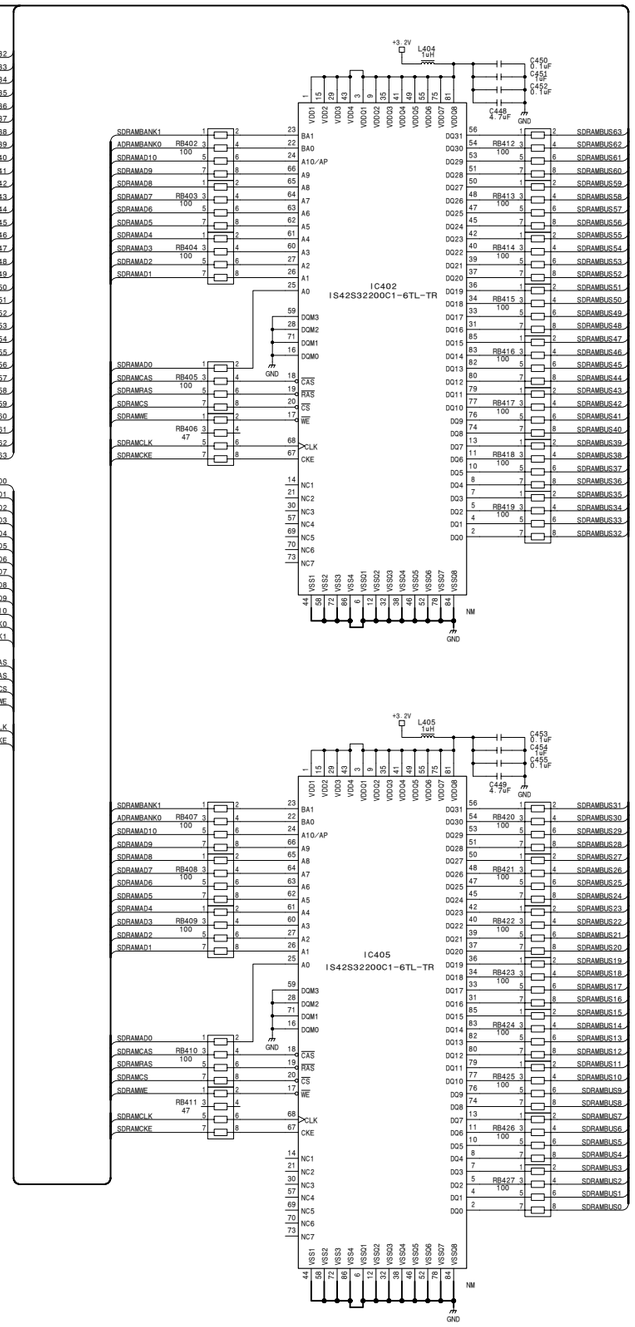


4-58

DPR-265C (6/8)
BOARD NO. 1-865-929-14
HDC-1500_DPR-265C_014_6


HDC1000/V2 (J, E)

DPR-265C (7/8)
SUFFIX: -14

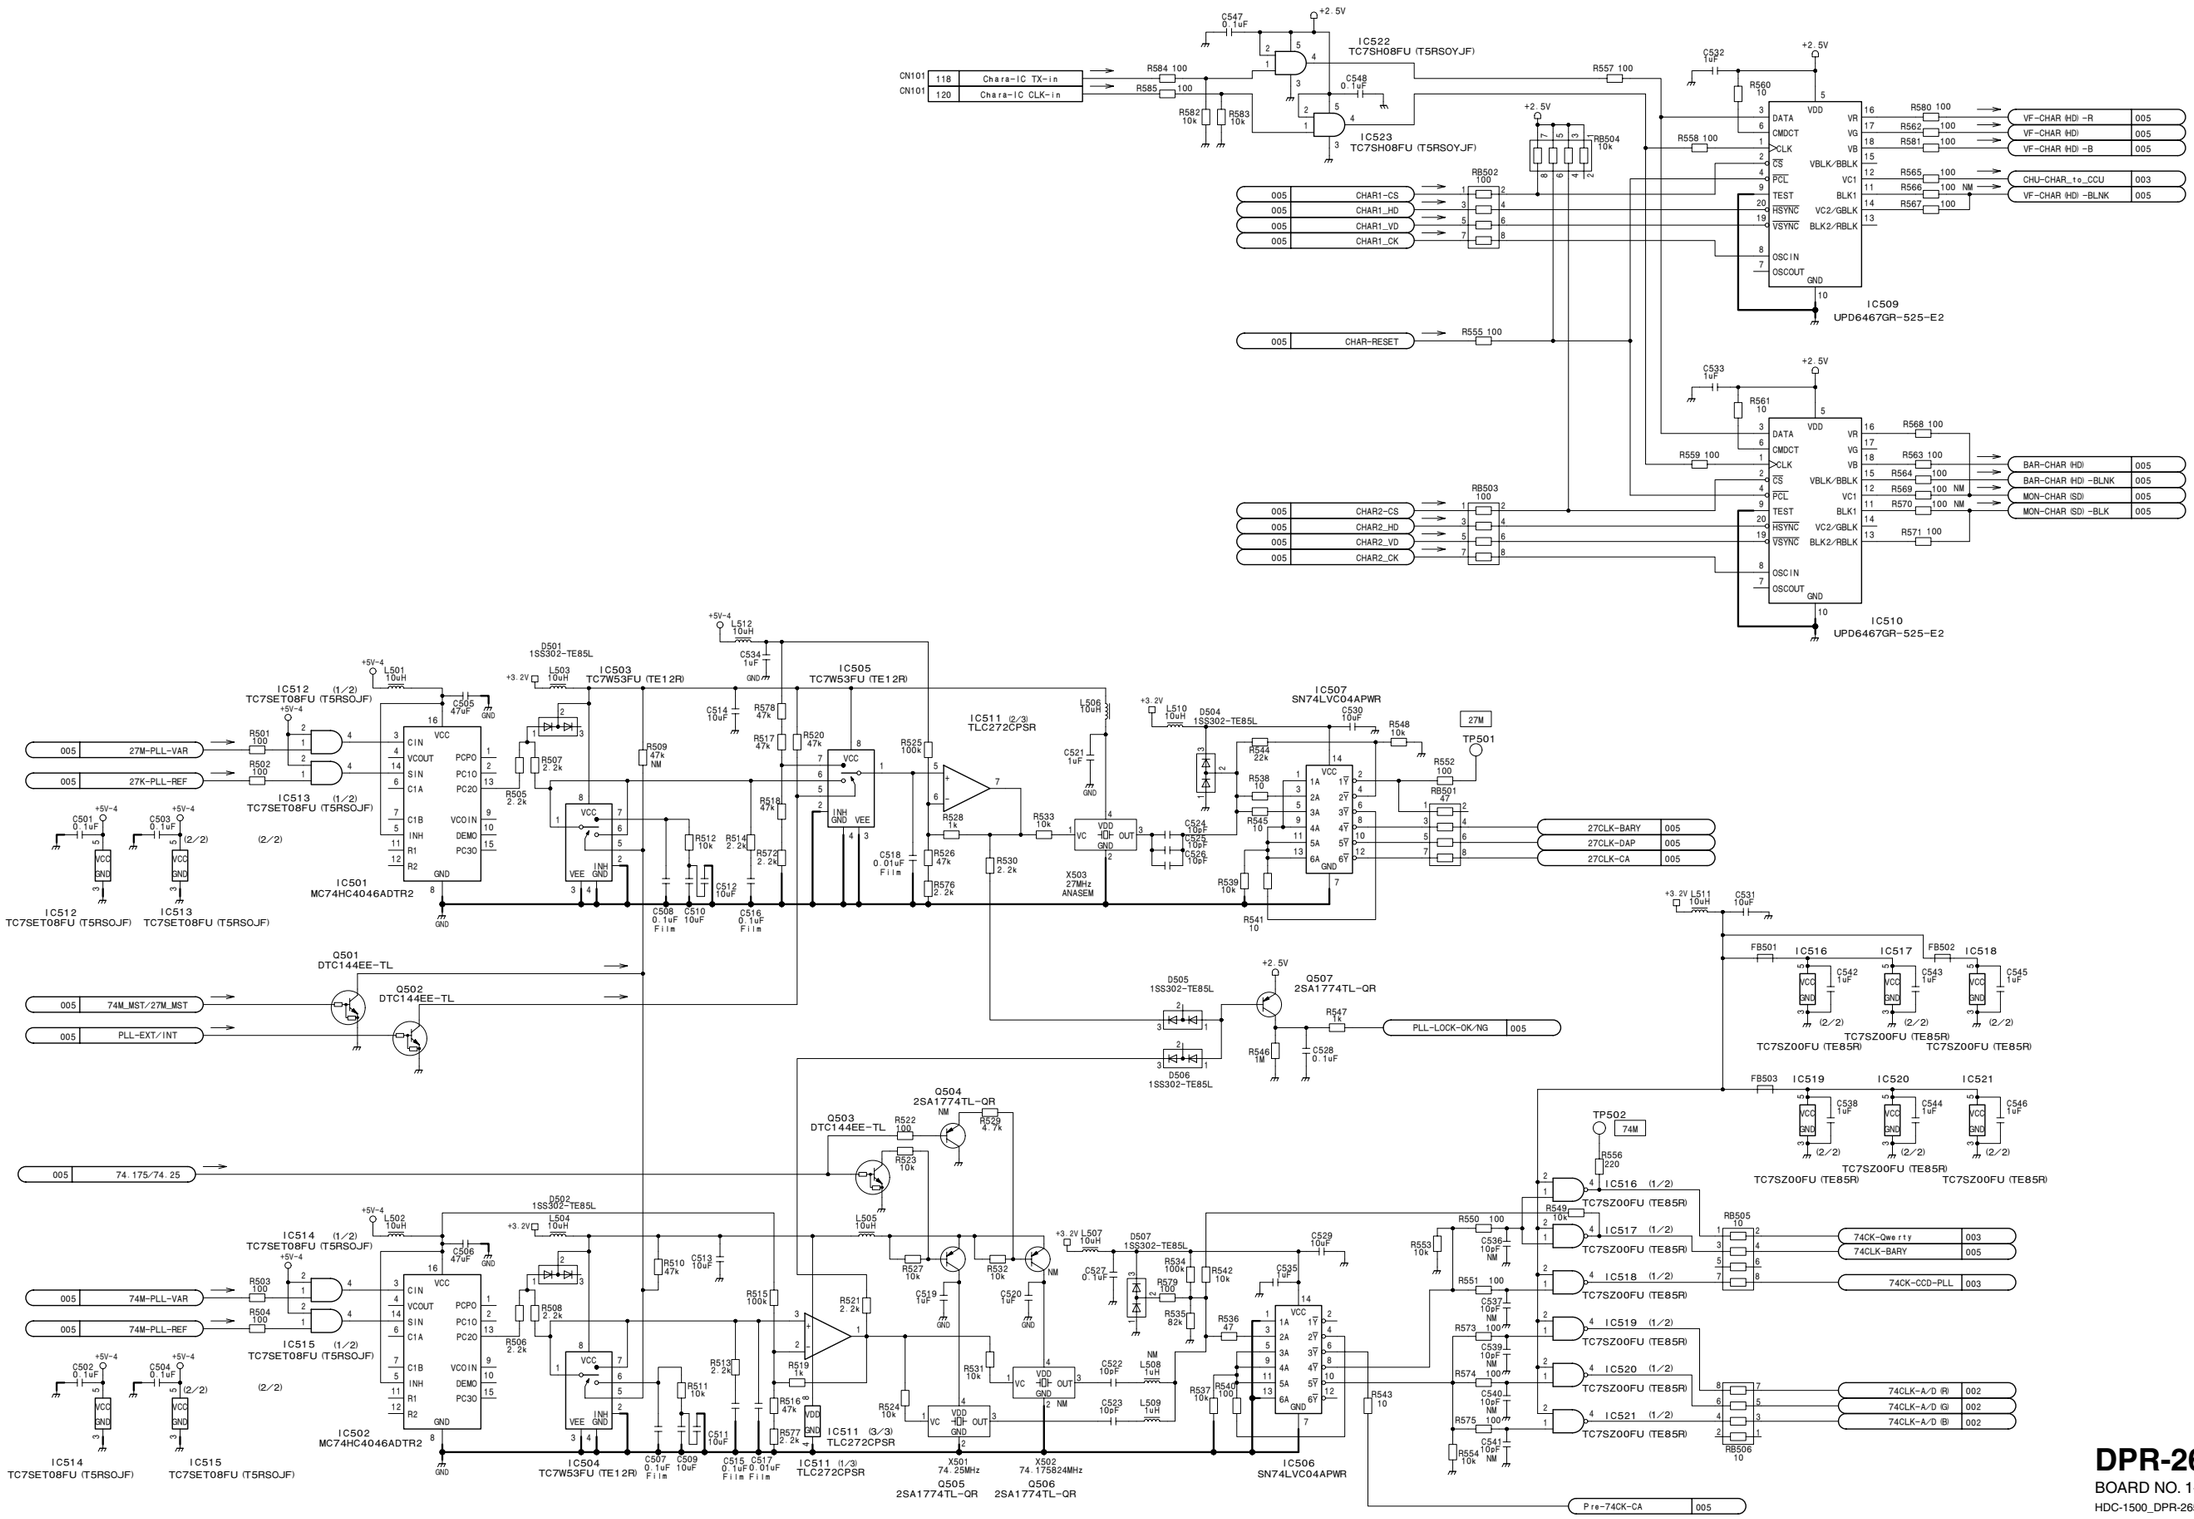

DPR-265C (7/8)
BOARD NO. 1-865-929-14
HDC-1500_DPR-265C_014_7

DPR-265C (8/8)
SUFFIX: -14

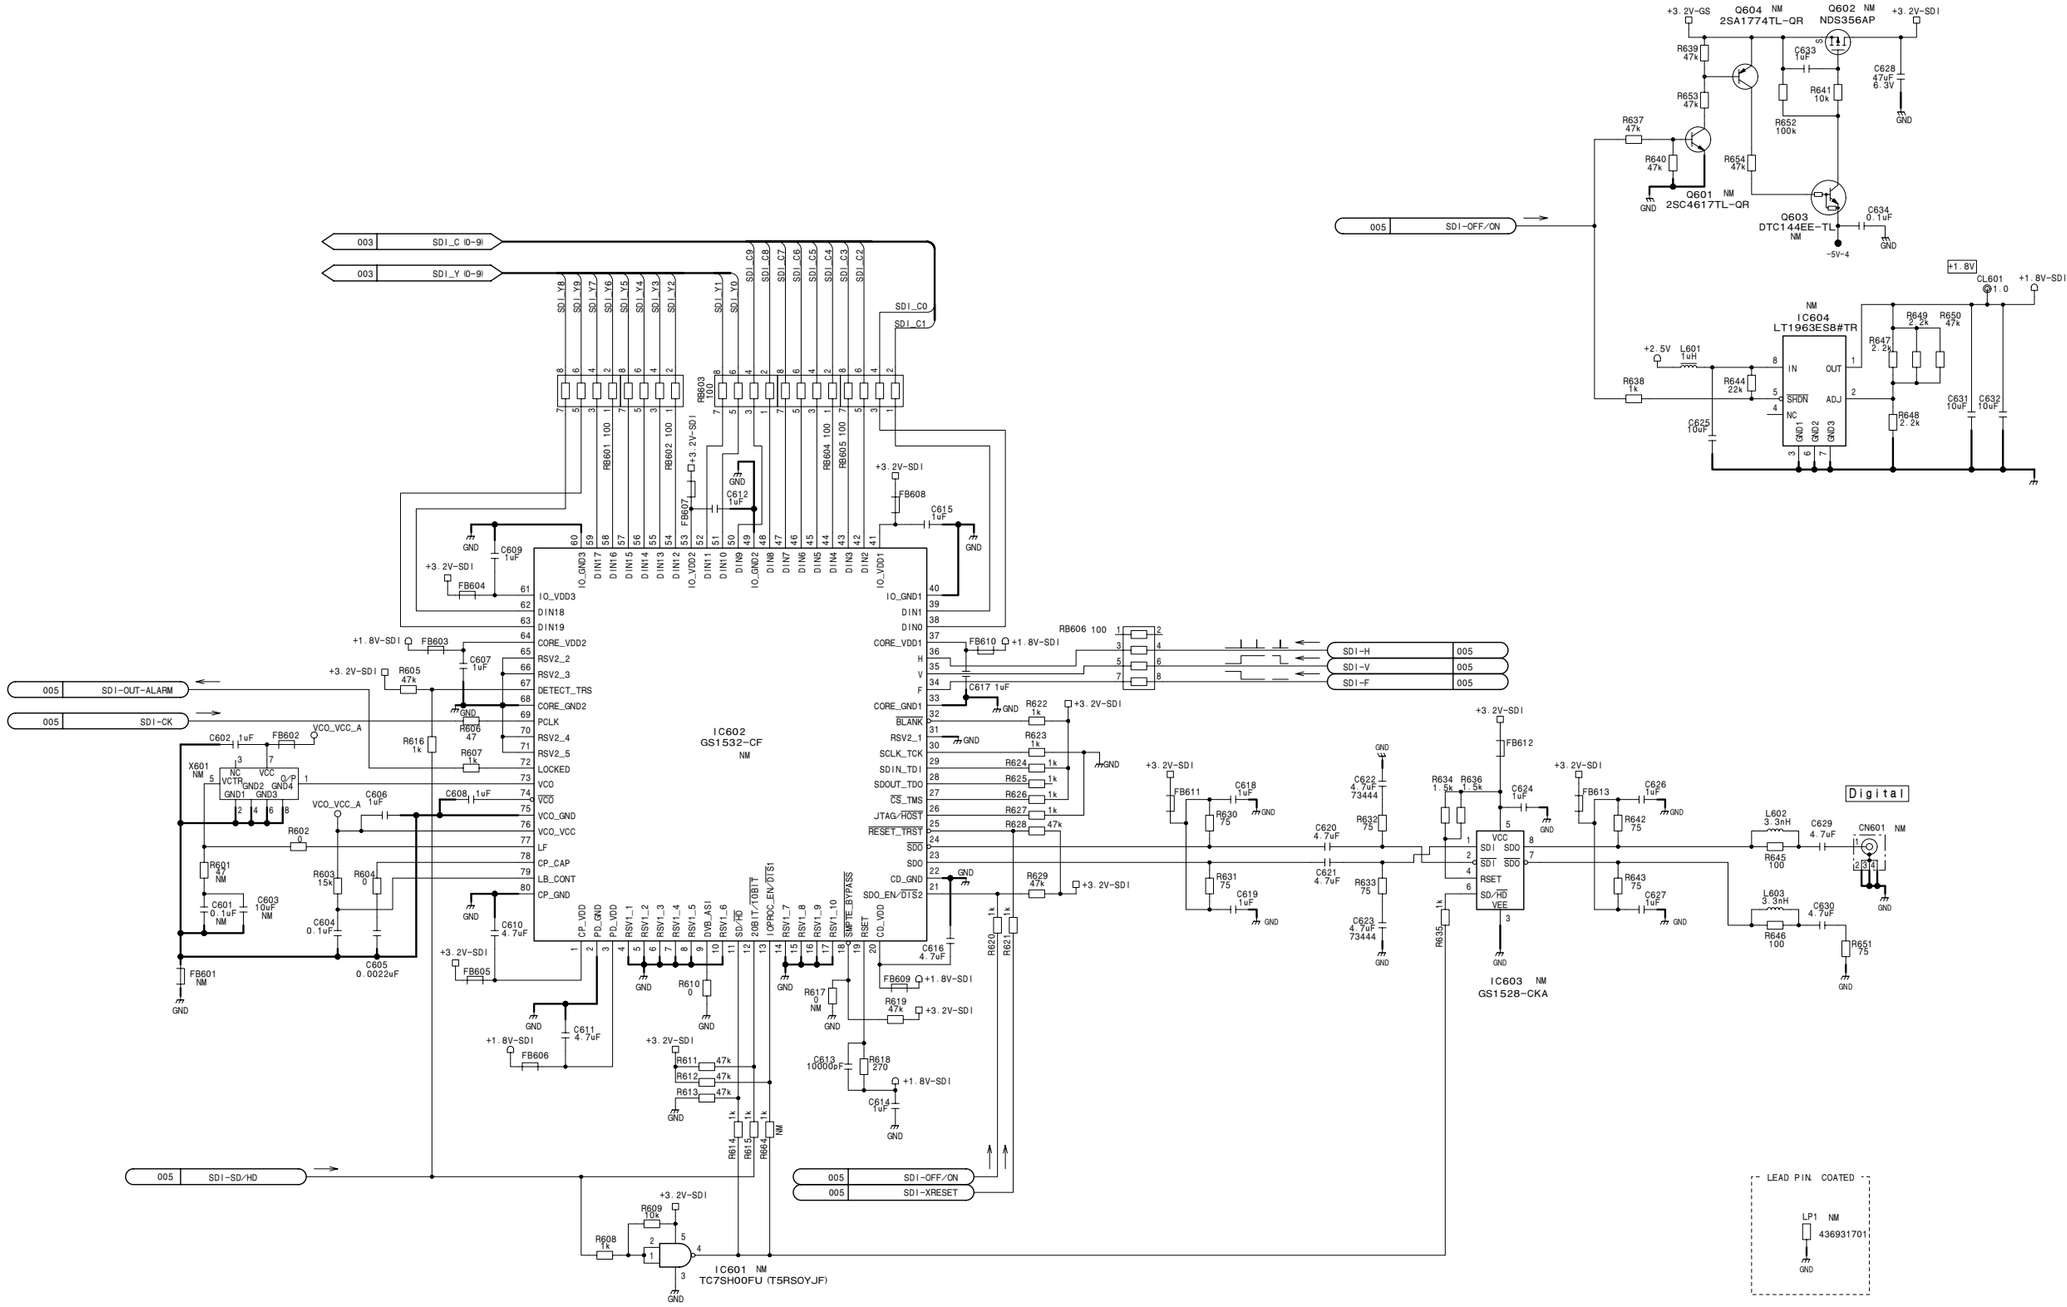

DPR-265C (8/8)


BOARD NO. 1-865-929-14


HDC-1500_DPR-265C_014_8

To TG-243


To CN-2579

To Filter

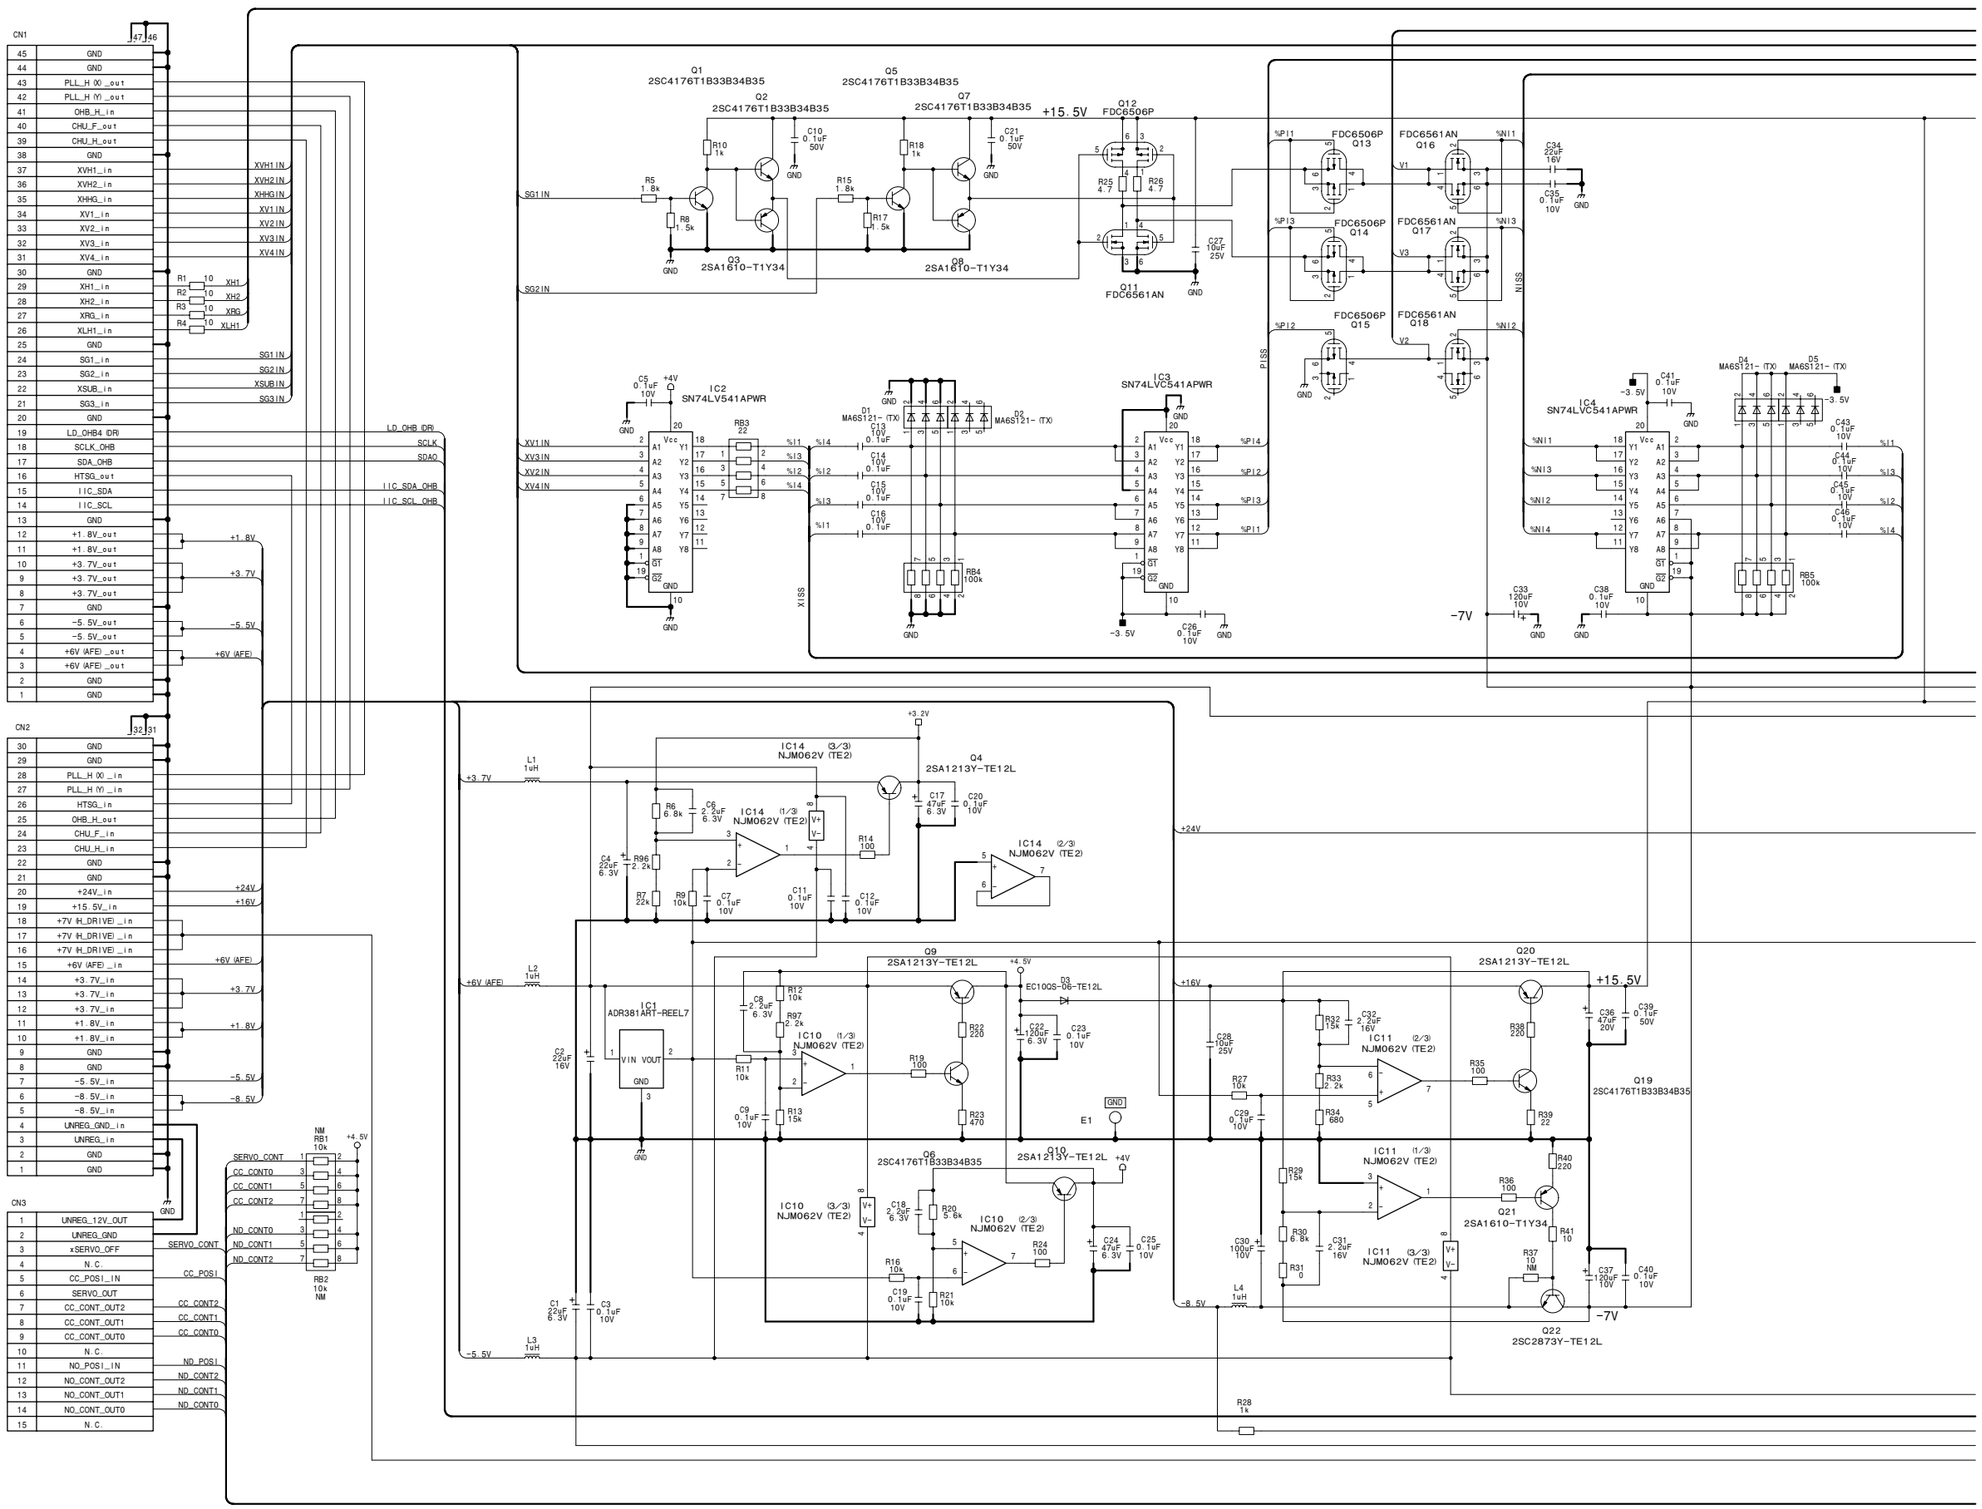


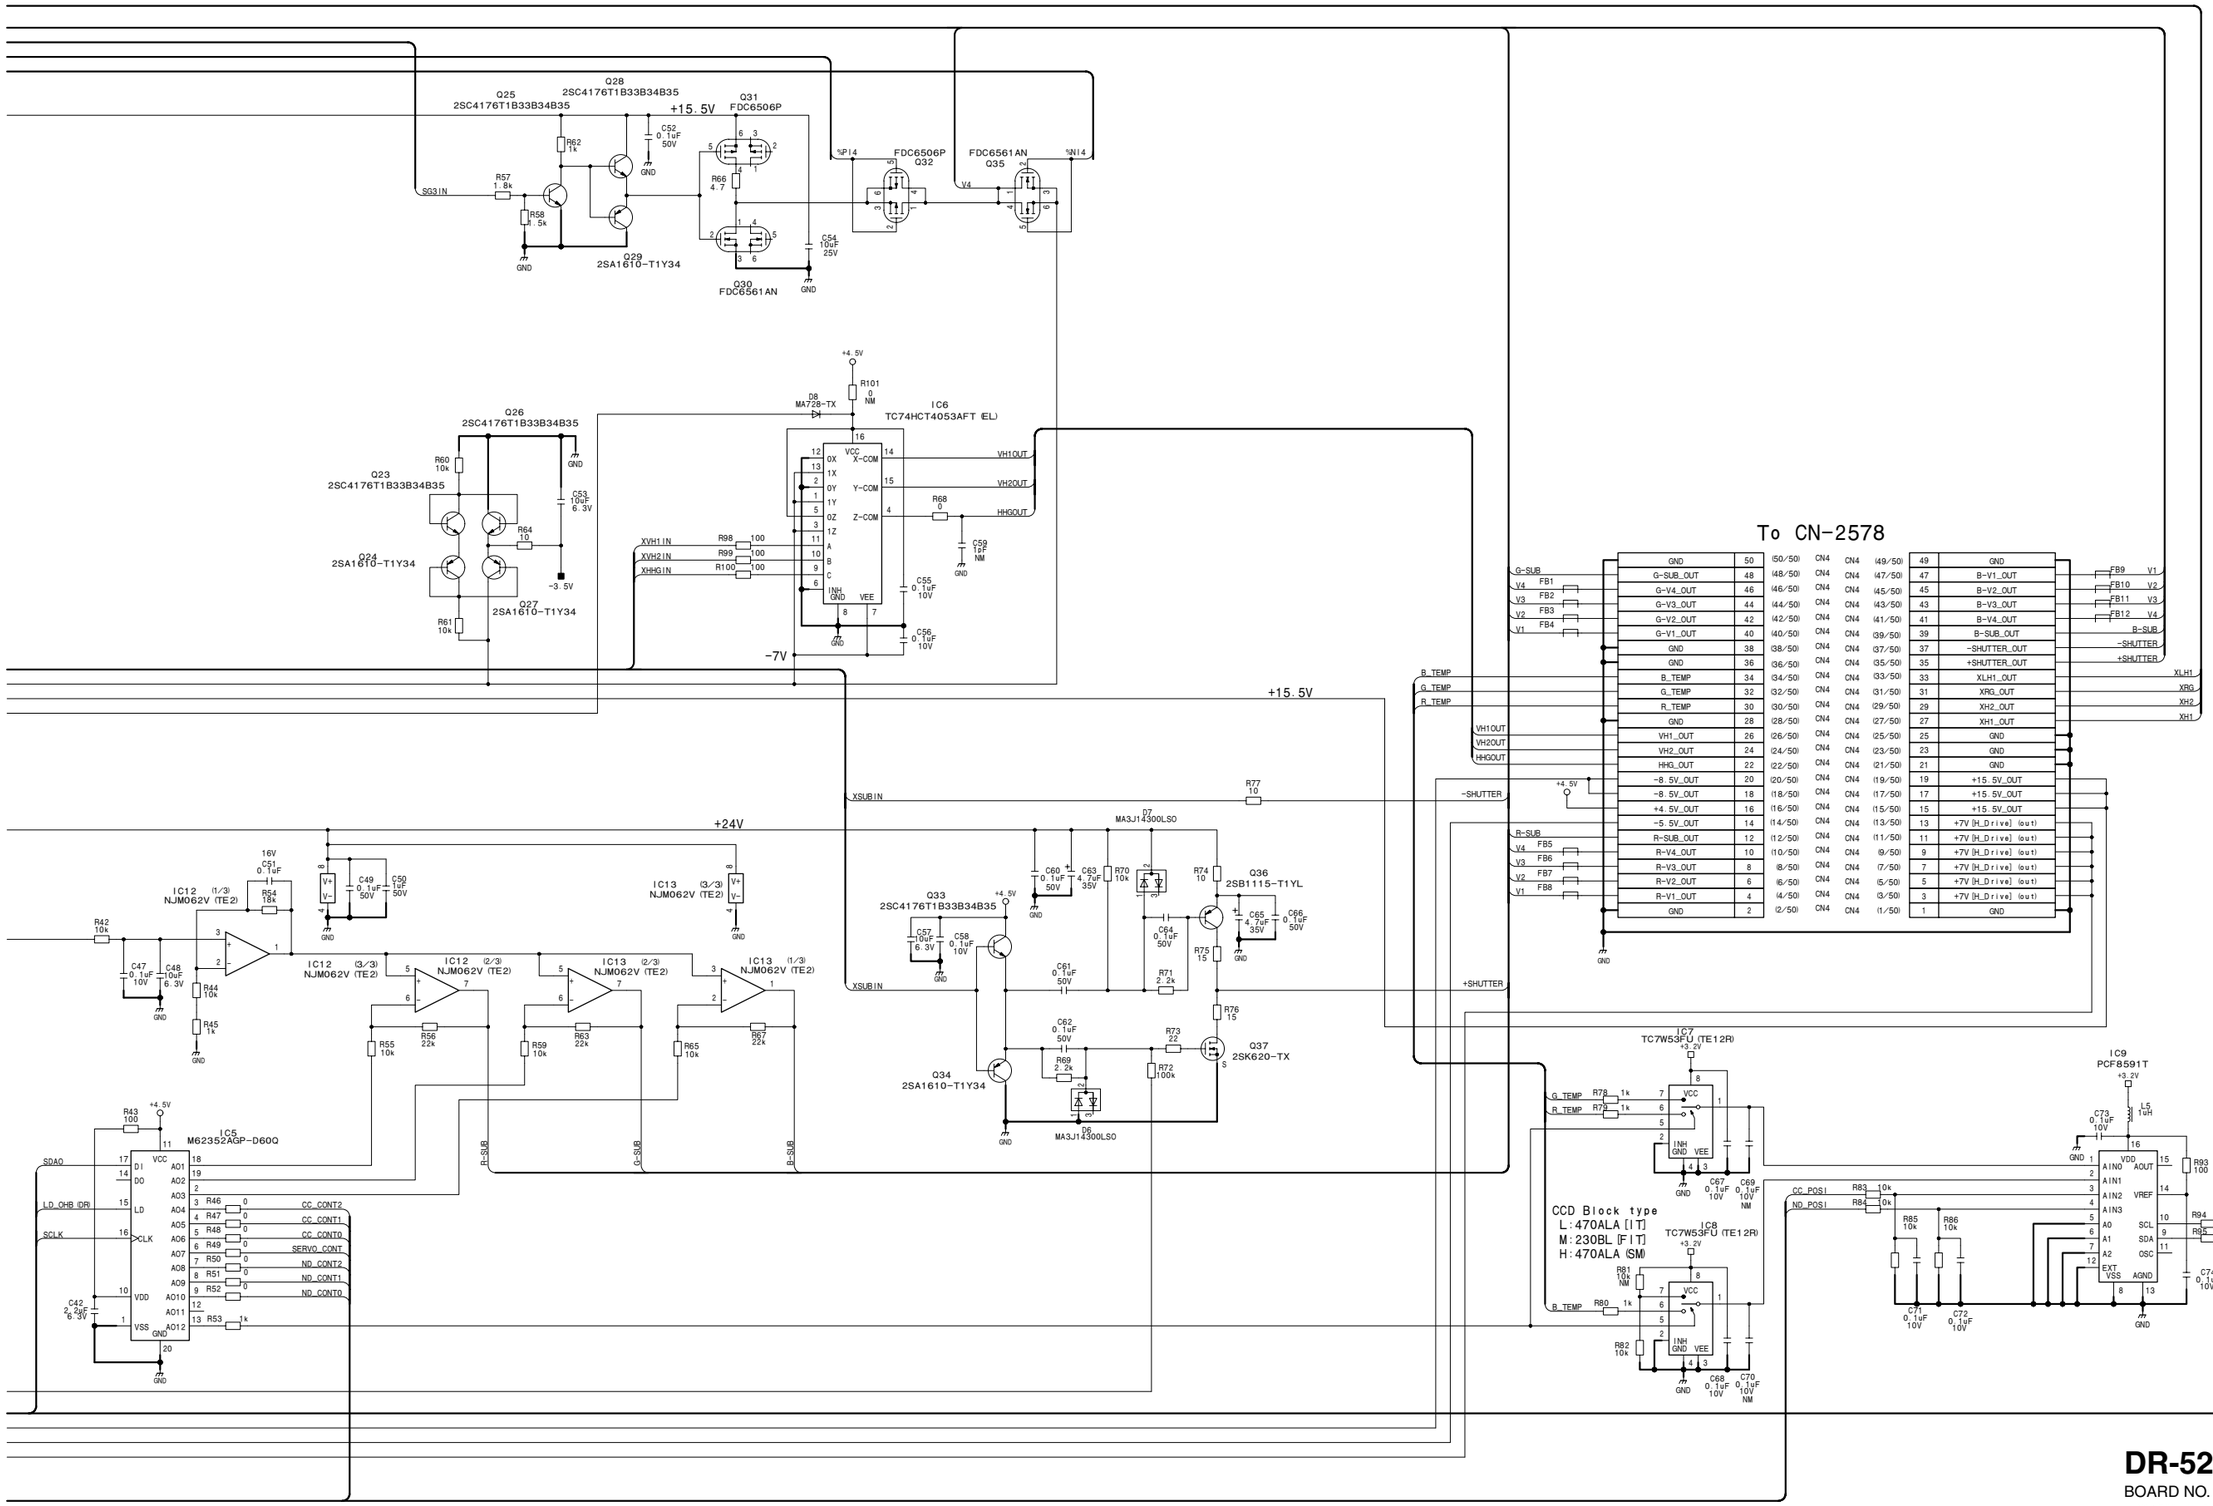
Q28
2SC4176T1B33B34B35
Q25
2SC4176T1B33B34B35
+15.5V
Q31
FDC6506P
R62
1k
C52
0.1uF
50V
GND
R57
1.8k
SG3IN
R58
4.5k
R66
4.7
%P14
FDC6506P
Q32
FDC6561AN
Q35
%N14
V4
C54
10uF
25V
Q29
2SA1610-T1Y34
Q30
FDC6561AN
+4.5V
R101
0
NM
D8
MA728-TX
IC6
TC74HCT4053AFT (EL)
Q26
2SC4176T1B33B34B35
Q23
2SC4176T1B33B34B35
R60
10k
C53
10uF
6.3V
R64
10
Q24
2SA1610-T1Y34
-3.5V
Q27
2SA1610-T1Y34
R61
10k
XVH1IN
XVH2IN
XHHGIN
R98
R99
R100
100
VH1OUT
VH2OUT
HHGOUT
R68
0
C59
1PF
NM
C55
0.1uF
10V
C56
0.1uF
10V
-7V
To CN-2578
G-SUB
V4
V3
V2
V1
FB1
FB2
FB3
FB4
B_TEMP
G_TEMP
R_TEMP
VH1OUT
VH2OUT
HHGOUT
-SHUTTER
+SHUTTER
R-SUB
FB5
FB6
FB7
FB8
FB9
FB10
FB11
FB12
B-SUB
XLH1
XRG
XH2
XH1
+15.5V
XSUBIN
R77
10
D7
MA3J14300LSO
Q33
2SC4176T1B33B34B35
C57
10uF
6.3V
C58
0.1uF
10V
C60
0.1uF
50V
C63
4.7uF
35V
R70
10k
R74
10
Q36
2SB1115-T1YL
C65
4.7uF
35V
C66
0.1uF
50V
C64
0.1uF
50V
R75
15
C61
0.1uF
50V
R71
2.2k
R76
15
C62
0.1uF
50V
R73
22
Q37
2SK620-TX
R69
2.2k
Q34
2SA1610-T1Y34
R72
100k
D6
MA3J14300LSO
+24V
IC12 (1/3)
NJM062V (TE2)
C51
0.1uF
16V
R54
18k
C49
0.1uF
50V
C50
1uF
50V
R42
10k
C47
0.1uF
10V
C48
10uF
6.3V
R44
10k
R45
1k
IC12 (3/3)
NJM062V (TE2)
IC12 (2/3)
NJM062V (TE2)
IC13 (2/3)
NJM062V (TE2)
IC13 (1/3)
NJM062V (TE2)
IC13 (3/3)
NJM062V (TE2)
R55
10k
R56
22k
R59
10k
R63
22k
R65
10k
R67
22k
R-SUB
G-SUB
B-SUB
IC5
M62352AGP-D60Q
+4.5V
R43
100
SDAO
LD_OHB (DR)
SCLK
R46
R47
R48
R49
R50
R51
R52
R53
0
1k
CC_CONT2
CC_CONT1
CC_CONT0
SERVO_CONT
ND_CONT2
ND_CONT1
ND_CONT0
C42
2.2uF
6.3V
IC7
TC7W53FU (TE12R)
+3.2V
R78
R79
1k
G_TEMP
R_TEMP
C67
0.1uF
10V
C69
0.1uF
10V
NM
IC8
TC7W53FU (TE12R)
R81
10k
NM
R80
1k
B_TEMP
R82
10k
C68
0.1uF
10V
C70
0.1uF
10V
NM
CCD Block type
L:470ALA (IT)
M:230BL (FIT)
H:470ALA (SM)
IC9
PCF8591T
C73
0.1uF
10V
L5
1uH
R83
R84
10k
CC_POS1
ND_POS1
R85
10k
R86
10k
C71
0.1uF
10V
C72
0.1uF
10V
R93
100
R94
R95
100
IIC_SCL_OHB
IIC_SDA_OHB
C74
0.1uF
10V

| | | |

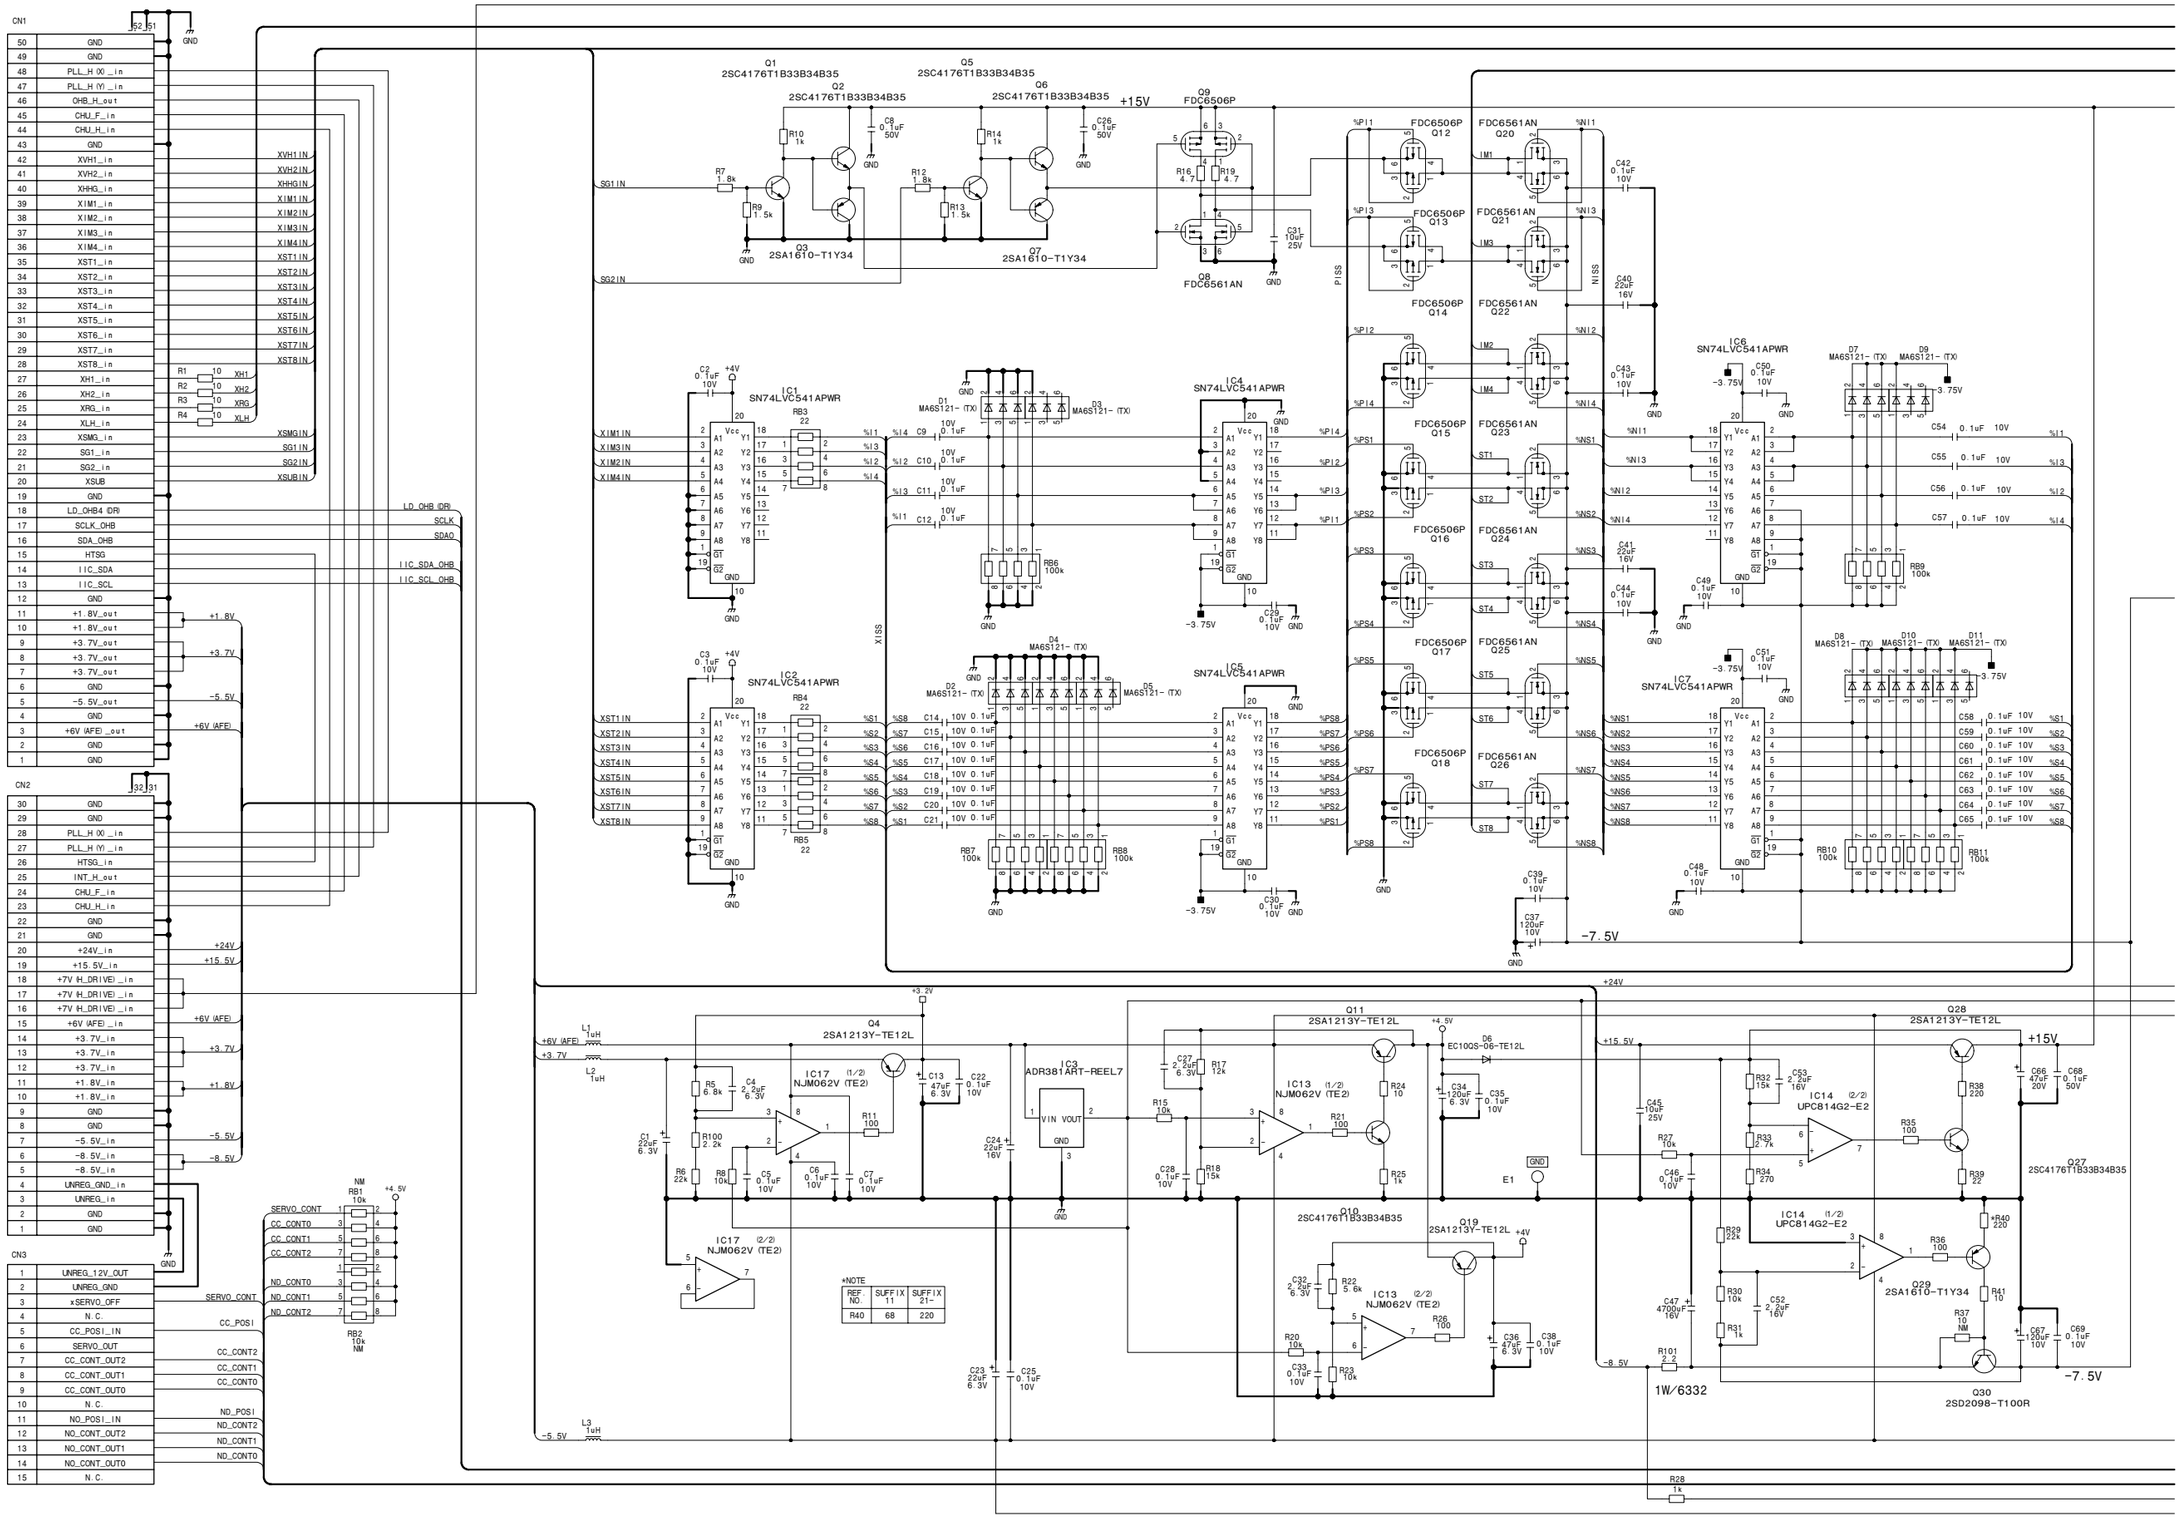


REF. NO.	SUFFIX 11	SUFFIX 21-
R40	68	220

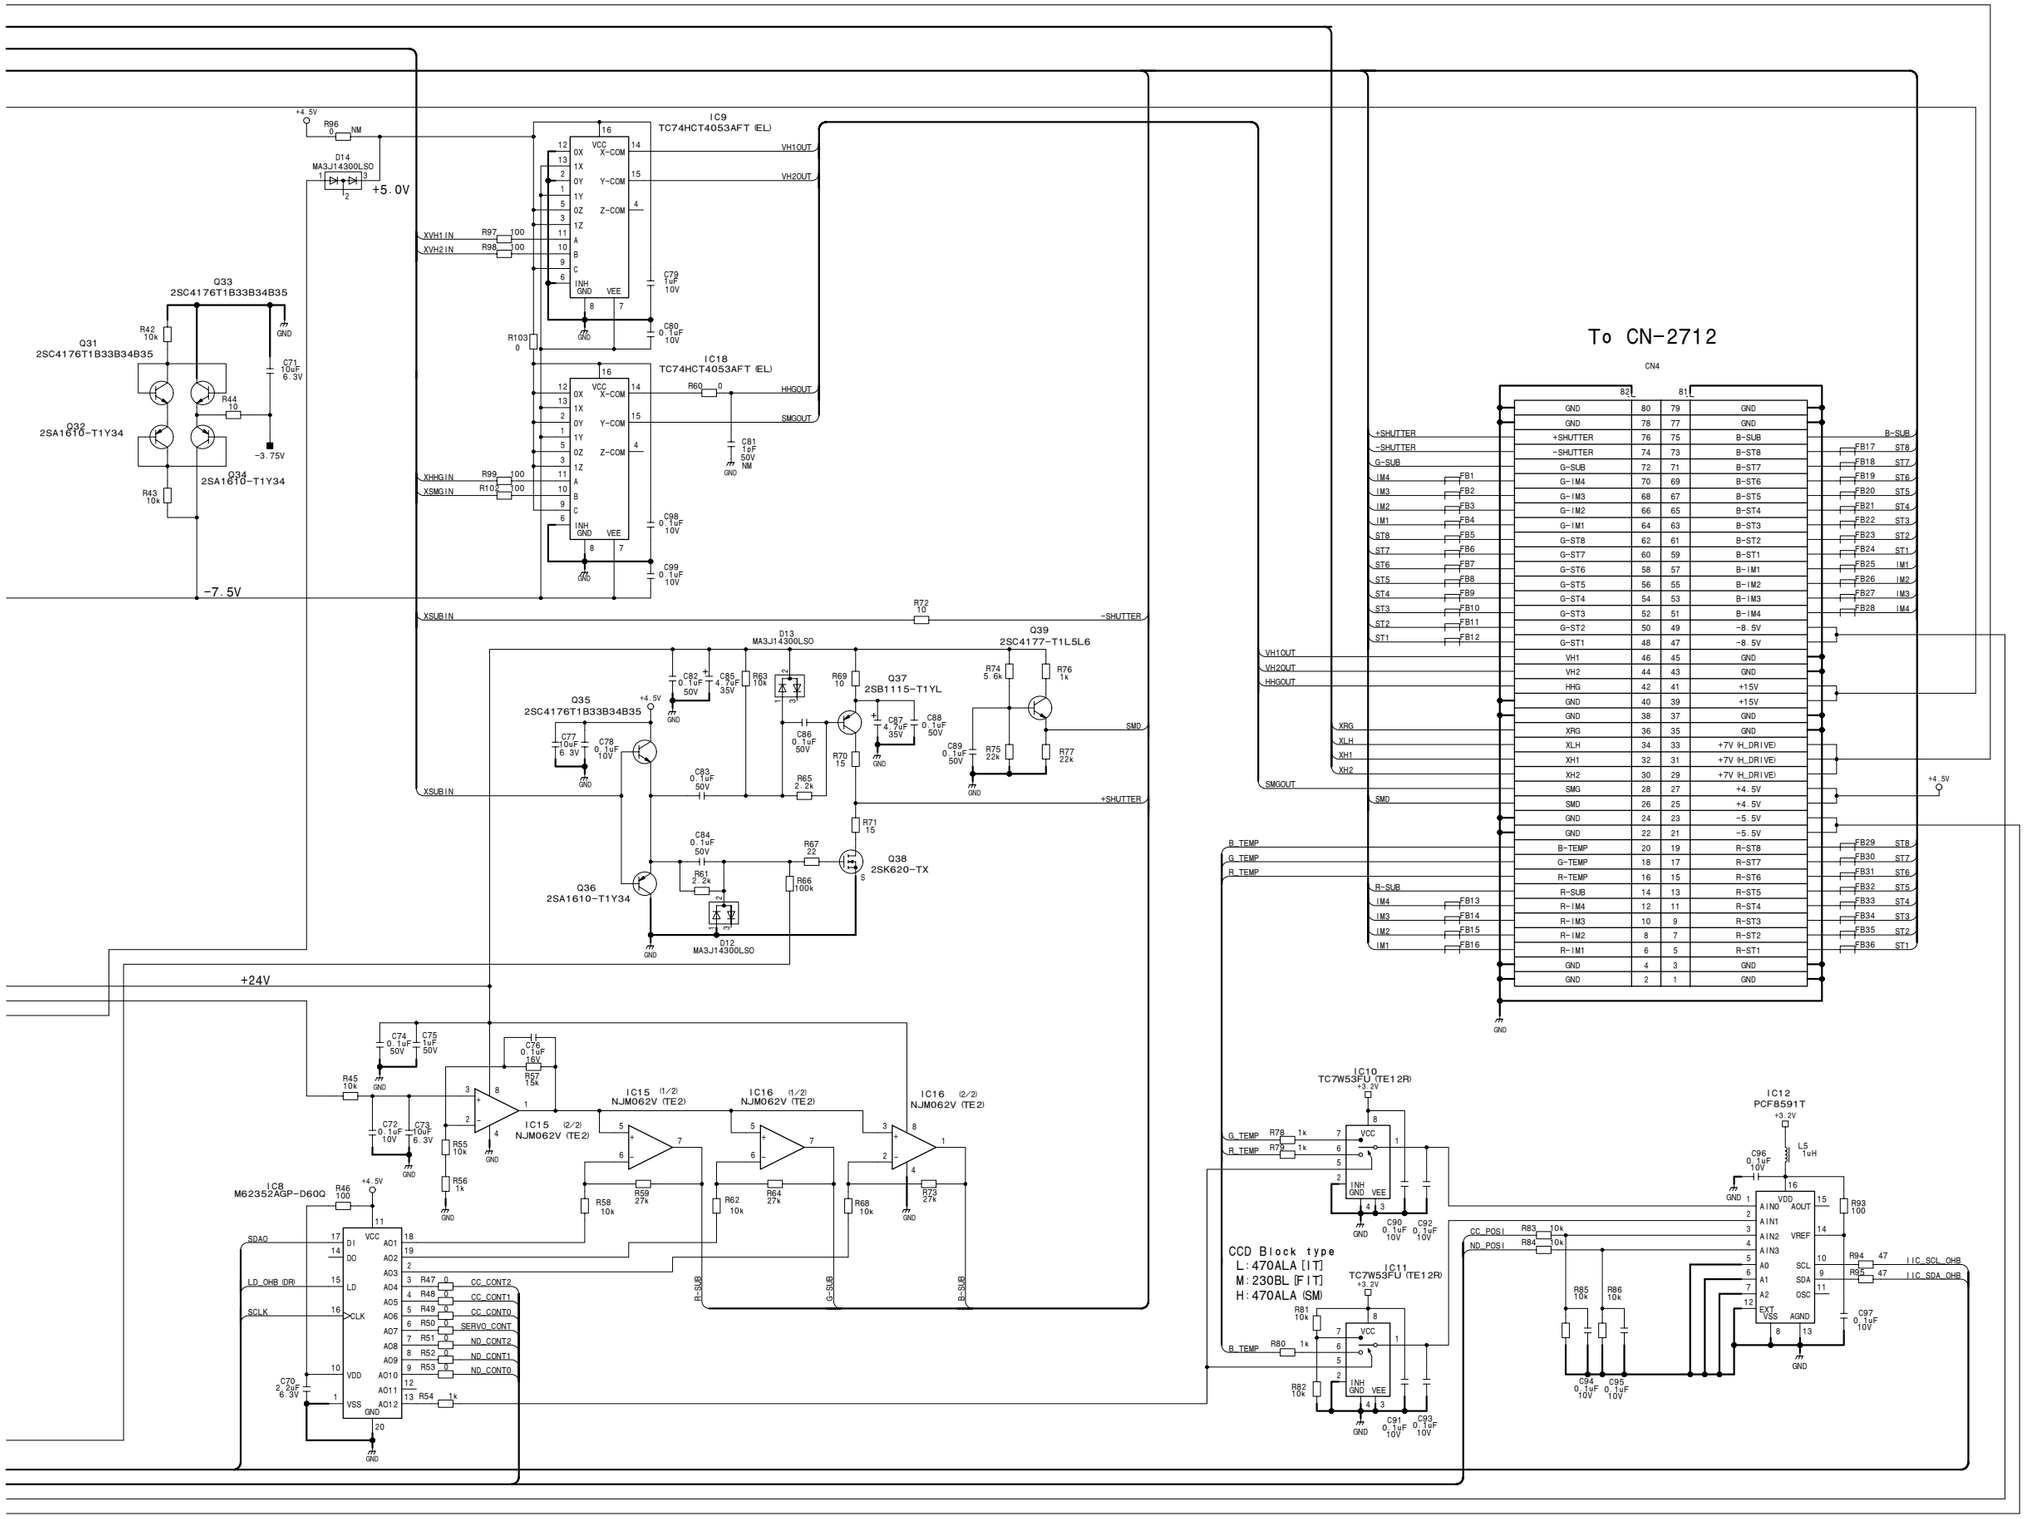

DR-562
BOARD NO. 1-865-961-11, 21
HDC-1600_DR-562_011_1


FL-337, FL-338
SUFFIX: -11 SUFFIX: -11

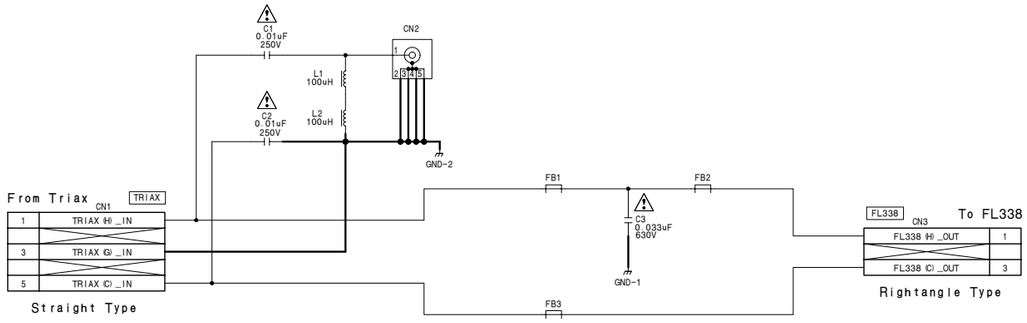

FL-337

BOARD NO. 1-868-411-11


HDC1550_FL-337_011_1

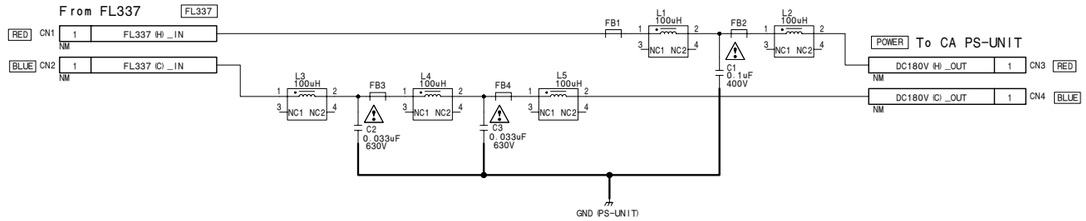


FL-338

BOARD NO. 1-868-492-11

HDC1550_FL-338_011_1

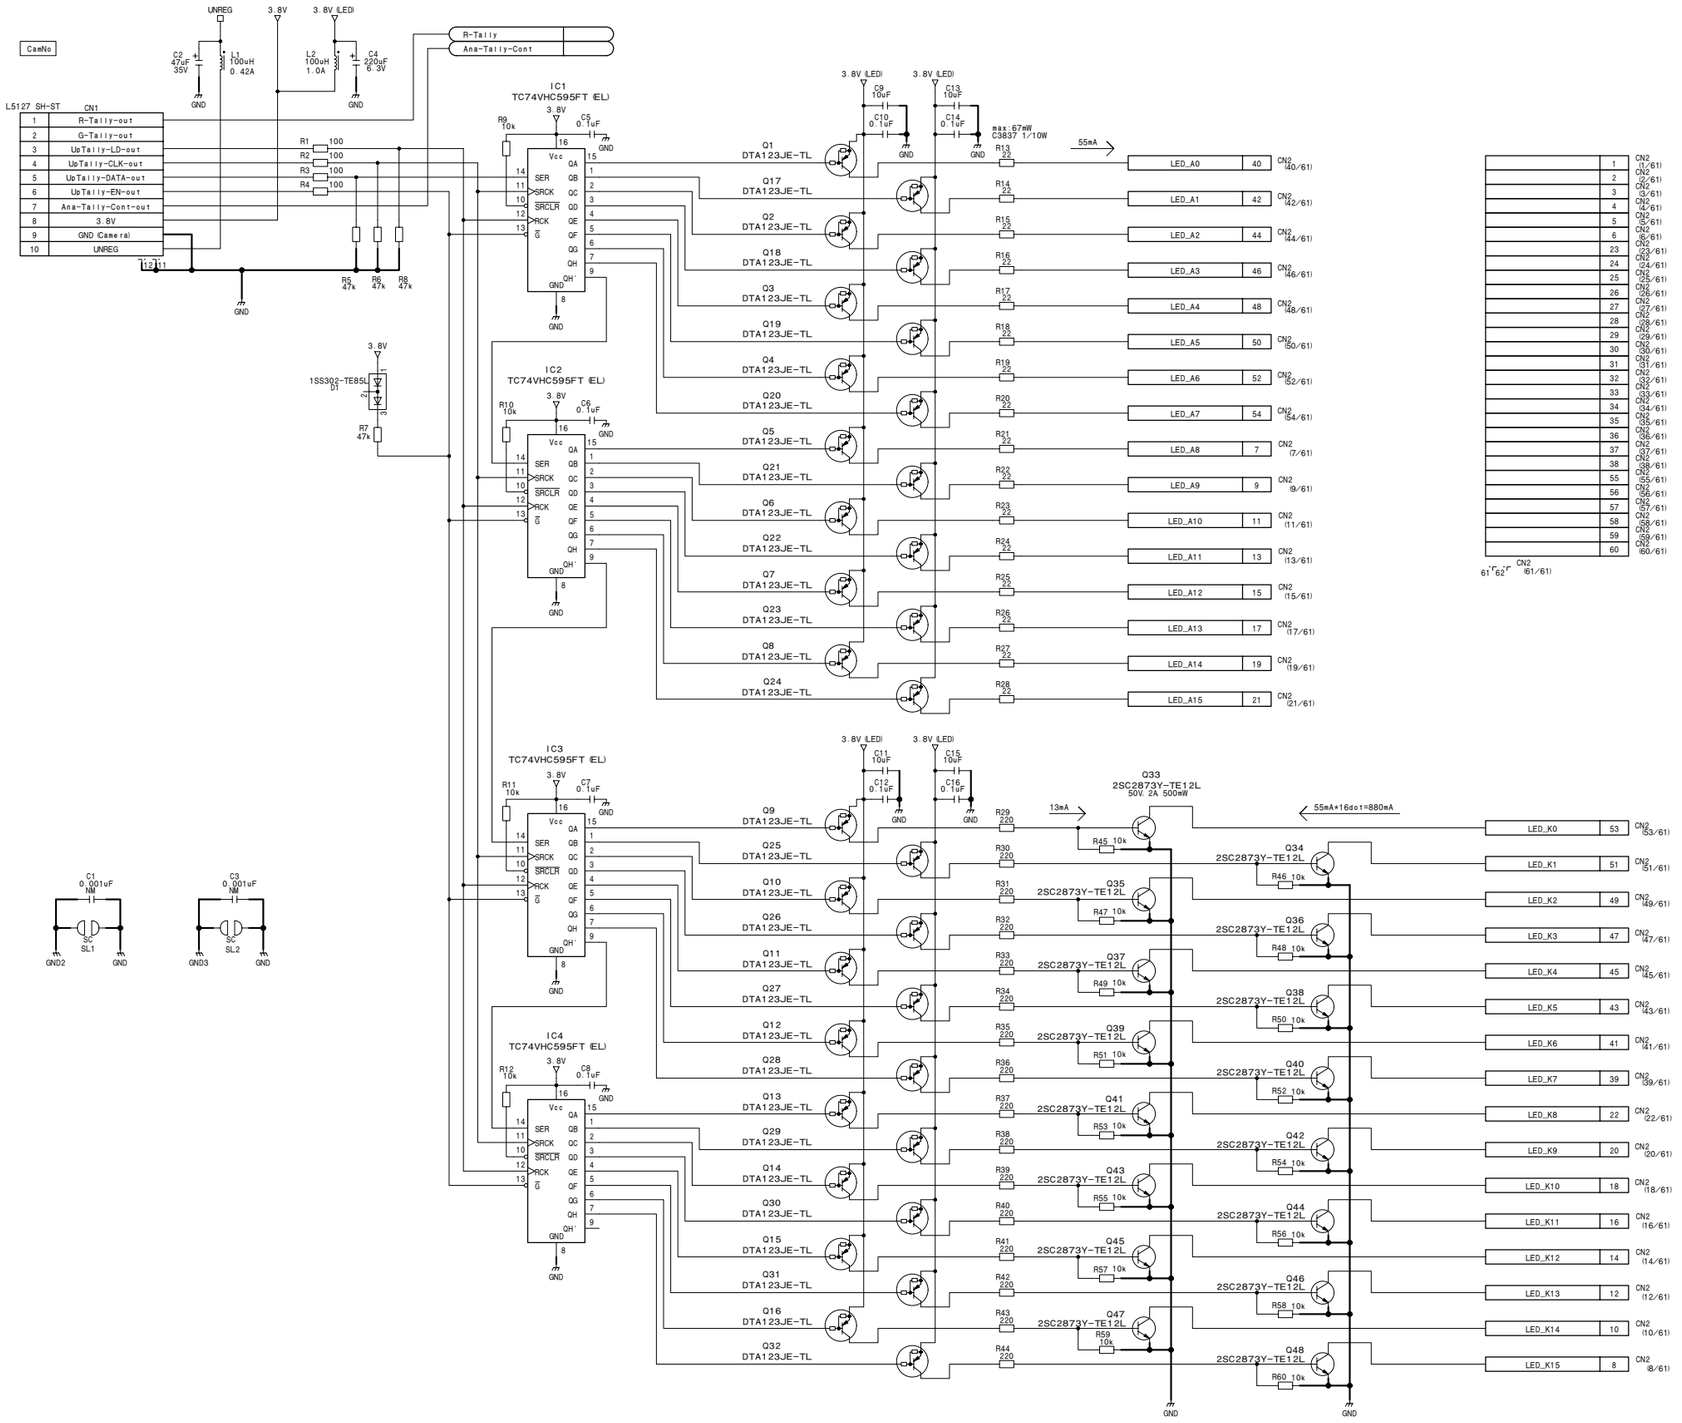

CamNo
UNREG
3.8V
3.8V (LED)
R-Tally
Ana-Tally-Cont
L5127-SH-ST
CN1
1 R-Tally-out
2 G-Tally-out
3 UpTally-LD-out
4 UpTally-CLK-out
5 UpTally-DATA-out
6 UpTally-EN-out
7 Ana-Tally-Cont-out
8 3.8V
9 GND (Camera)
10 UNREG
C2 47uF 35V
L1 100uH 0.42A
L2 100uH 1.0A
C4 220uF 6.3V
GND
R1 100
R2 100
R3 100
R4 100
R5 47k
R6 47k
R8 47k
IC1 TC74VHC595FT (EL)
IC2 TC74VHC595FT (EL)
IC3 TC74VHC595FT (EL)
IC4 TC74VHC595FT (EL)
R9 10k
R10 10k
R11 10k
R12 10k
C5 0.1uF
C6 0.1uF
C7 0.1uF
C8 0.1uF
Vcc
SER
SRCK
SRCLR
RCK
G
QA
QB
QC
QD
QE
QF
QG
QH
QH'
1SS302-TE85L
D1
R7 47k
C1 0.001uF NM
C3 0.001uF NM
SC SL1
SC SL2
GND2
GND3
C9 10uF
C10 0.1uF
C13 10uF
C14 0.1uF
C11 10uF
C12 0.1uF
C15 10uF
C16 0.1uF
max:67mW
C3837 1/10W
55mA
13mA
55mA*16dot=880mA
Q1 DTA123JE-TL
Q17 DTA123JE-TL
Q2 DTA123JE-TL
Q18 DTA123JE-TL
Q3 DTA123JE-TL
Q19 DTA123JE-TL
Q4 DTA123JE-TL
Q20 DTA123JE-TL
Q5 DTA123JE-TL
Q21 DTA123JE-TL
Q6 DTA123JE-TL
Q22 DTA123JE-TL
Q7 DTA123JE-TL
Q23 DTA123JE-TL
Q8 DTA123JE-TL
Q24 DTA123JE-TL
Q9 DTA123JE-TL
Q25 DTA123JE-TL
Q10 DTA123JE-TL
Q26 DTA123JE-TL
Q11 DTA123JE-TL
Q27 DTA123JE-TL
Q12 DTA123JE-TL
Q28 DTA123JE-TL
Q13 DTA123JE-TL
Q29 DTA123JE-TL
Q14 DTA123JE-TL
Q30 DTA123JE-TL
Q15 DTA123JE-TL
Q31 DTA123JE-TL
Q16 DTA123JE-TL
Q32 DTA123JE-TL
Q33 2SC2873Y-TE12L 50V, 2A 500mW
Q34 2SC2873Y-TE12L
Q35 2SC2873Y-TE12L
Q36 2SC2873Y-TE12L
Q37 2SC2873Y-TE12L
Q38 2SC2873Y-TE12L
Q39 2SC2873Y-TE12L
Q40 2SC2873Y-TE12L
Q41 2SC2873Y-TE12L
Q42 2SC2873Y-TE12L
Q43 2SC2873Y-TE12L
Q44 2SC2873Y-TE12L
Q45 2SC2873Y-TE12L
Q46 2SC2873Y-TE12L
Q47 2SC2873Y-TE12L
Q48 2SC2873Y-TE12L
R13 22
R14 22
R15 22
R16 22
R17 22
R18 22
R19 22
R20 22
R21 22
R22 22
R23 22
R24 22
R25 22
R26 22
R27 22
R28 22
R29 220
R30 220
R31 220
R32 220
R33 220
R34 220
R35 220
R36 220
R37 220
R38 220
R39 220
R40 220
R41 220
R42 220
R43 220
R44 220
R45 10k
R46 10k
R47 10k
R48 10k
R49 10k
R50 10k
R51 10k
R52 10k
R53 10k
R54 10k
R55 10k
R56 10k
R57 10k
R58 10k
R59 10k
R60 10k
LED_A0 40 CN2 (40/61)
LED_A1 42 CN2 (42/61)
LED_A2 44 CN2 (44/61)
LED_A3 46 CN2 (46/61)
LED_A4 48 CN2 (48/61)
LED_A5 50 CN2 (50/61)
LED_A6 52 CN2 (52/61)
LED_A7 54 CN2 (54/61)
LED_A8 7 CN2 (7/61)
LED_A9 9 CN2 (9/61)
LED_A10 11 CN2 (11/61)
LED_A11 13 CN2 (13/61)
LED_A12 15 CN2 (15/61)
LED_A13 17 CN2 (17/61)
LED_A14 19 CN2 (19/61)
LED_A15 21 CN2 (21/61)
LED_K0 53 CN2 (53/61)
LED_K1 51 CN2 (51/61)
LED_K2 49 CN2 (49/61)
LED_K3 47 CN2 (47/61)
LED_K4 45 CN2 (45/61)
LED_K5 43 CN2 (43/61)
LED_K6 41 CN2 (41/61)
LED_K7 39 CN2 (39/61)
LED_K8 22 CN2 (22/61)
LED_K9 20 CN2 (20/61)
LED_K10 18 CN2 (18/61)
LED_K11 16 CN2 (16/61)
LED_K12 14 CN2 (14/61)
LED_K13 12 CN2 (12/61)
LED_K14 10 CN2 (10/61)
LED_K15 8 CN2 (8/61)
CN2 (1/61)
CN2 (2/61)
CN2 (3/61)
CN2 (4/61)
CN2 (5/61)
CN2 (6/61)
CN2 (23/61)
CN2 (24/61)
CN2 (25/61)
CN2 (26/61)
CN2 (27/61)
CN2 (28/61)
CN2 (29/61)
CN2 (30/61)
CN2 (31/61)
CN2 (32/61)
CN2 (33/61)
CN2 (34/61)
CN2 (35/61)
CN2 (36/61)
CN2 (37/61)
CN2 (38/61)
CN2 (55/61)
CN2 (56/61)
CN2 (57/61)
CN2 (58/61)
CN2 (59/61)
CN2 (60/61)
61 62 CN2 (61/61)

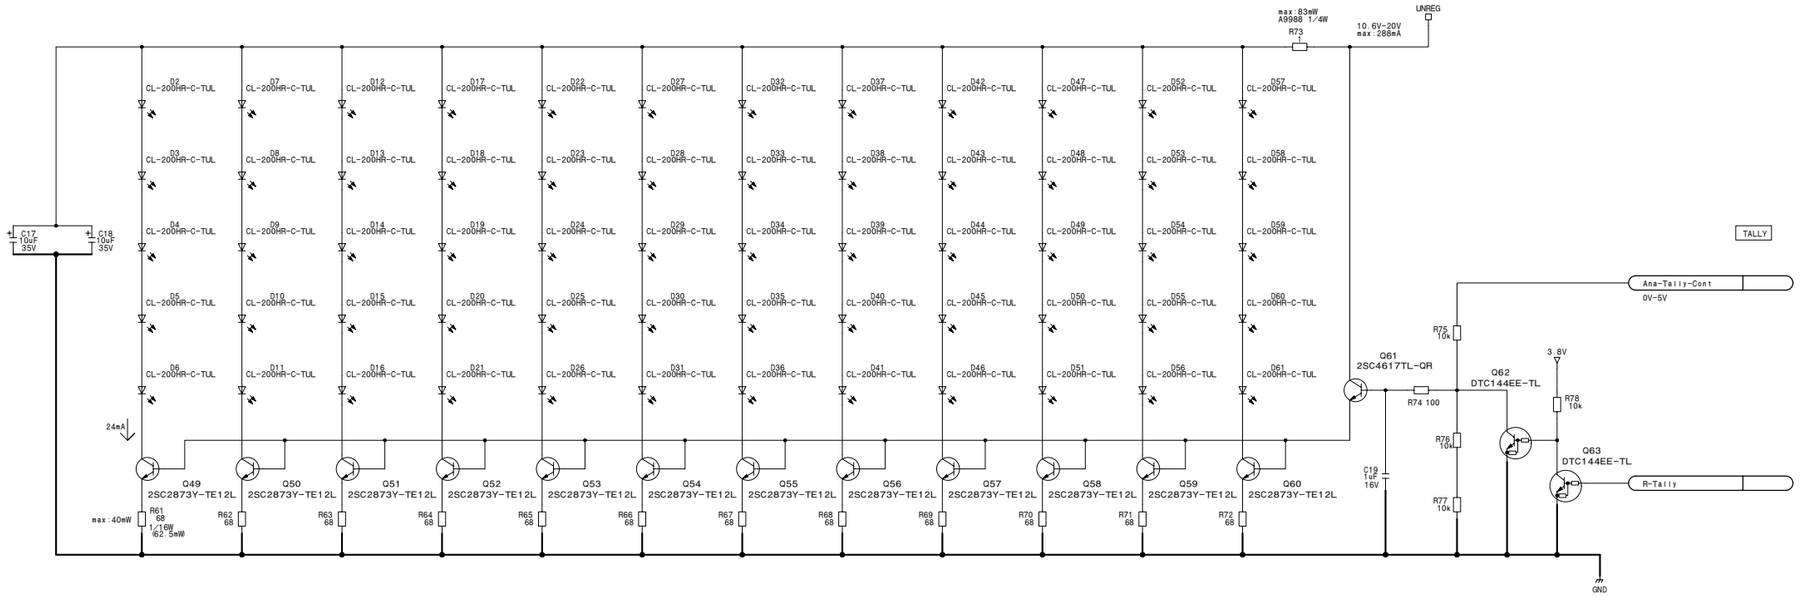

LE-291

BOARD NO. 1-867-407-11


HDC-1000_LE-291_011_1

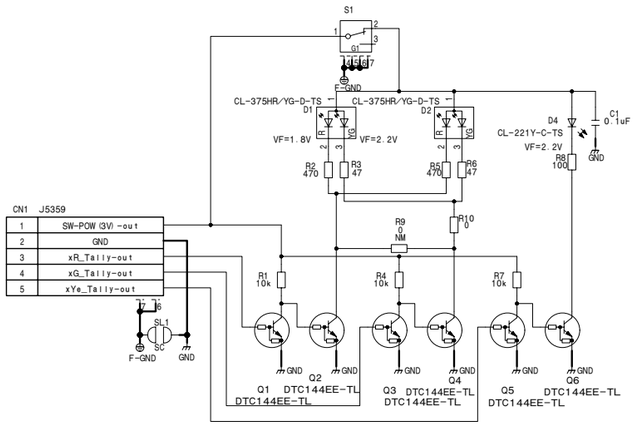

LE-308

BOARD NO. 1-867-221-12


HDC-1500_LE-308_012_1

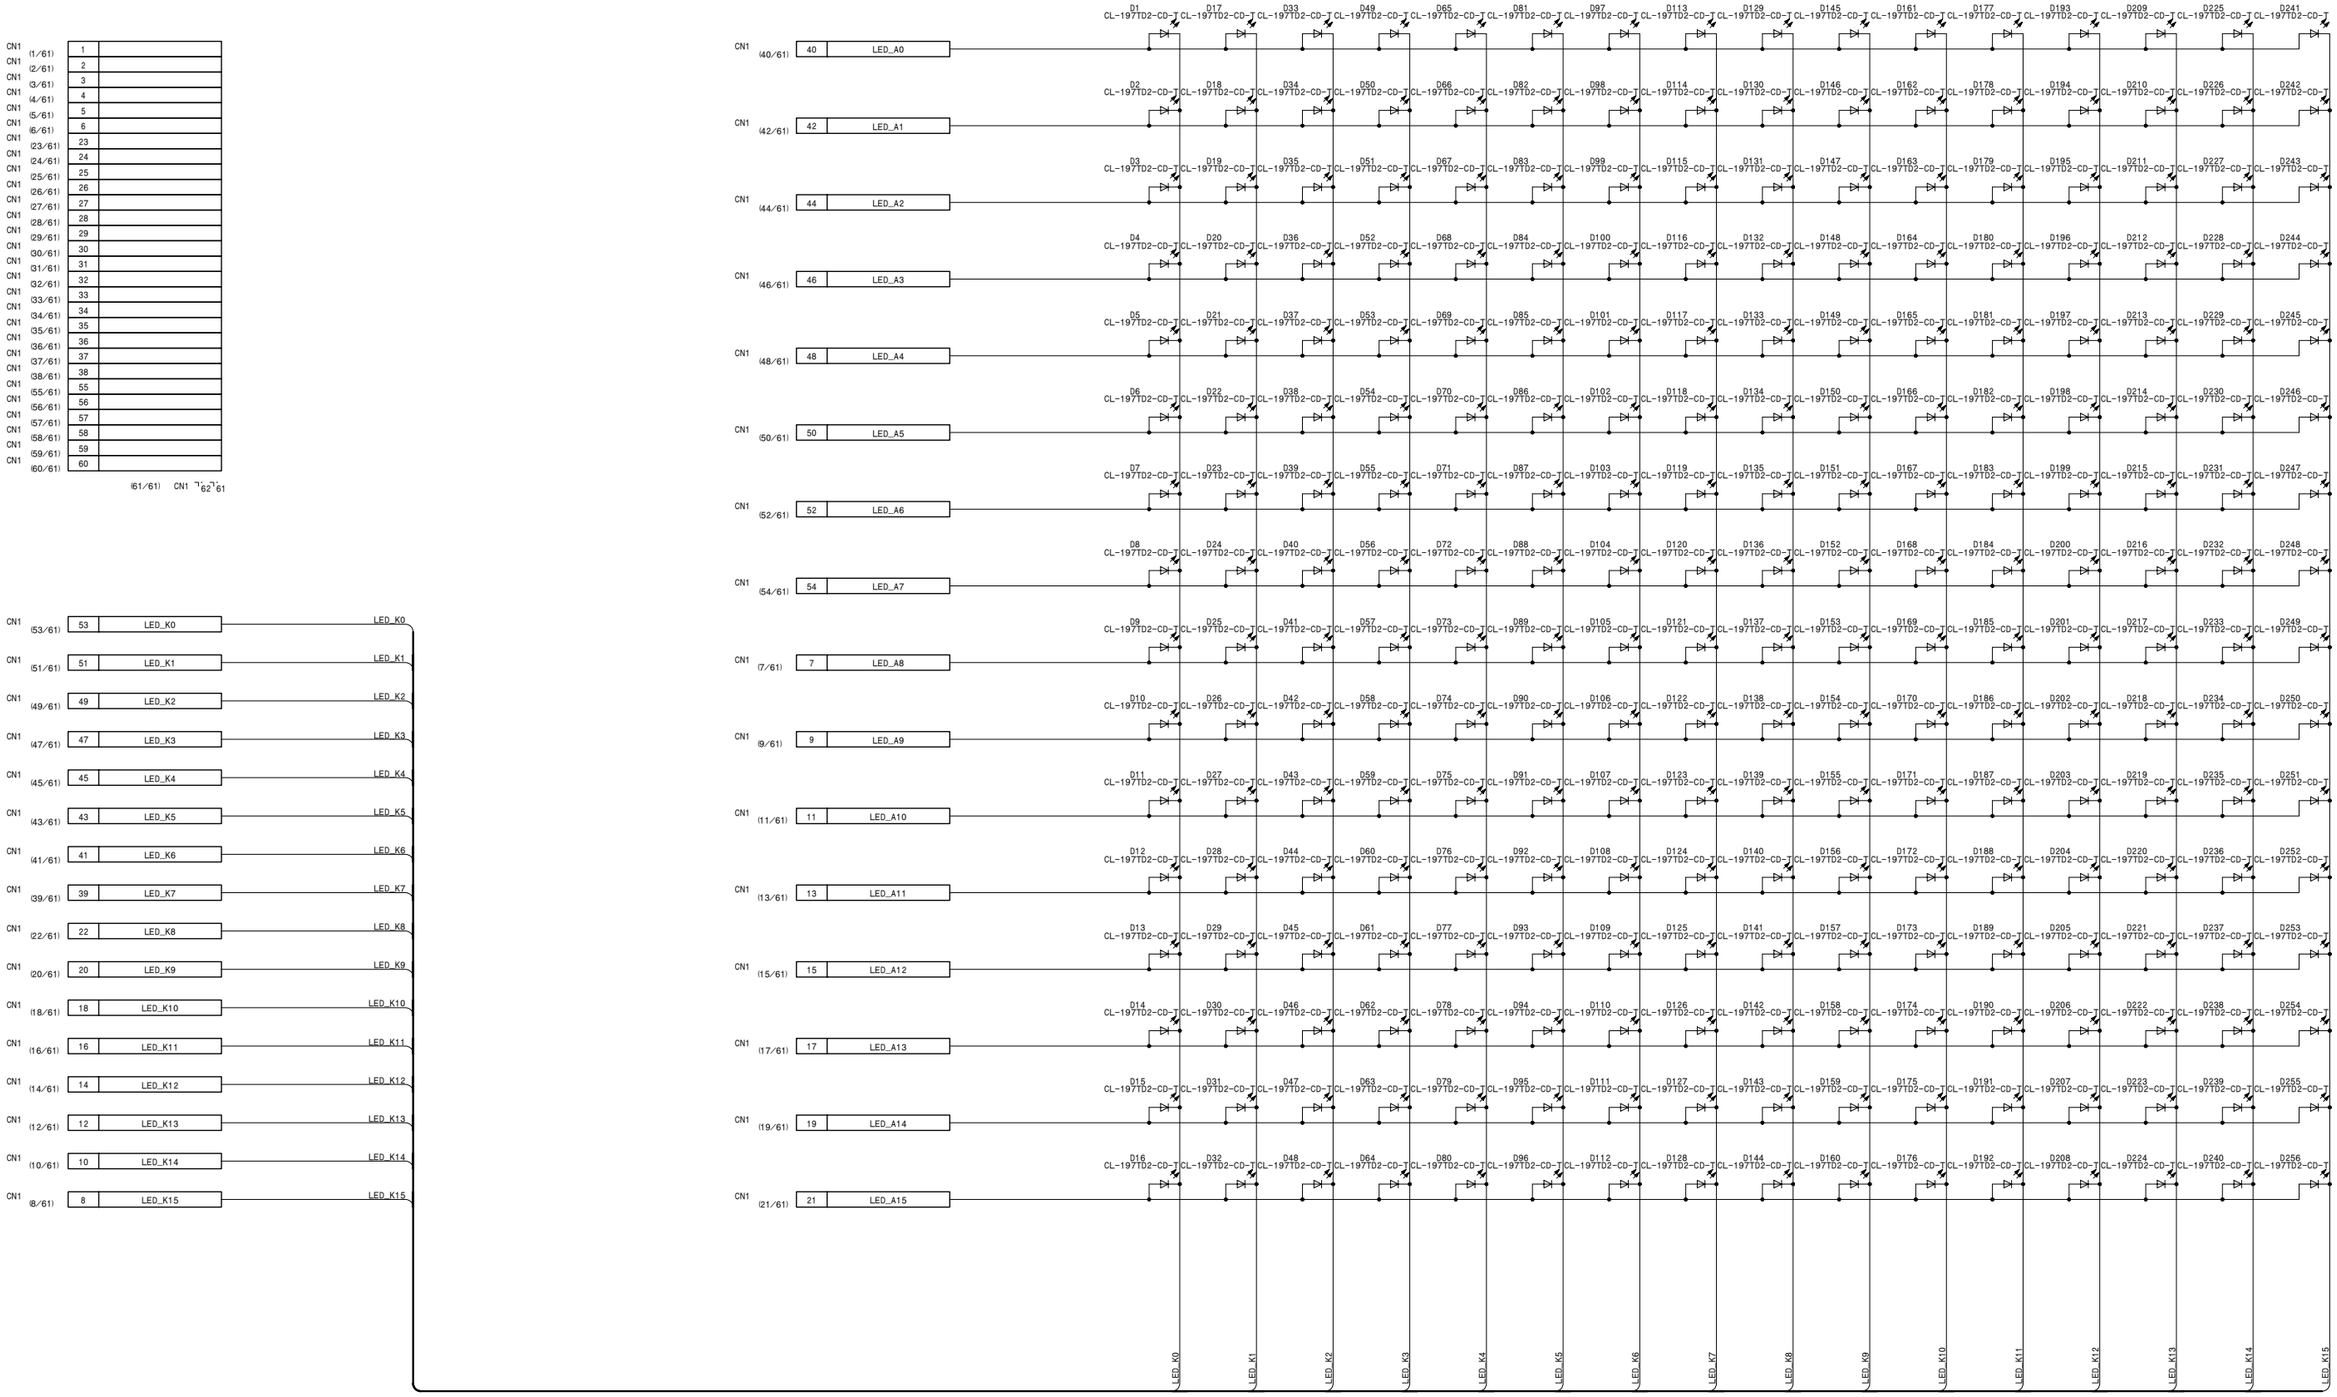



LE-309


BOARD NO. 1-867-375-11


HDC-1000_LE-309_011_1

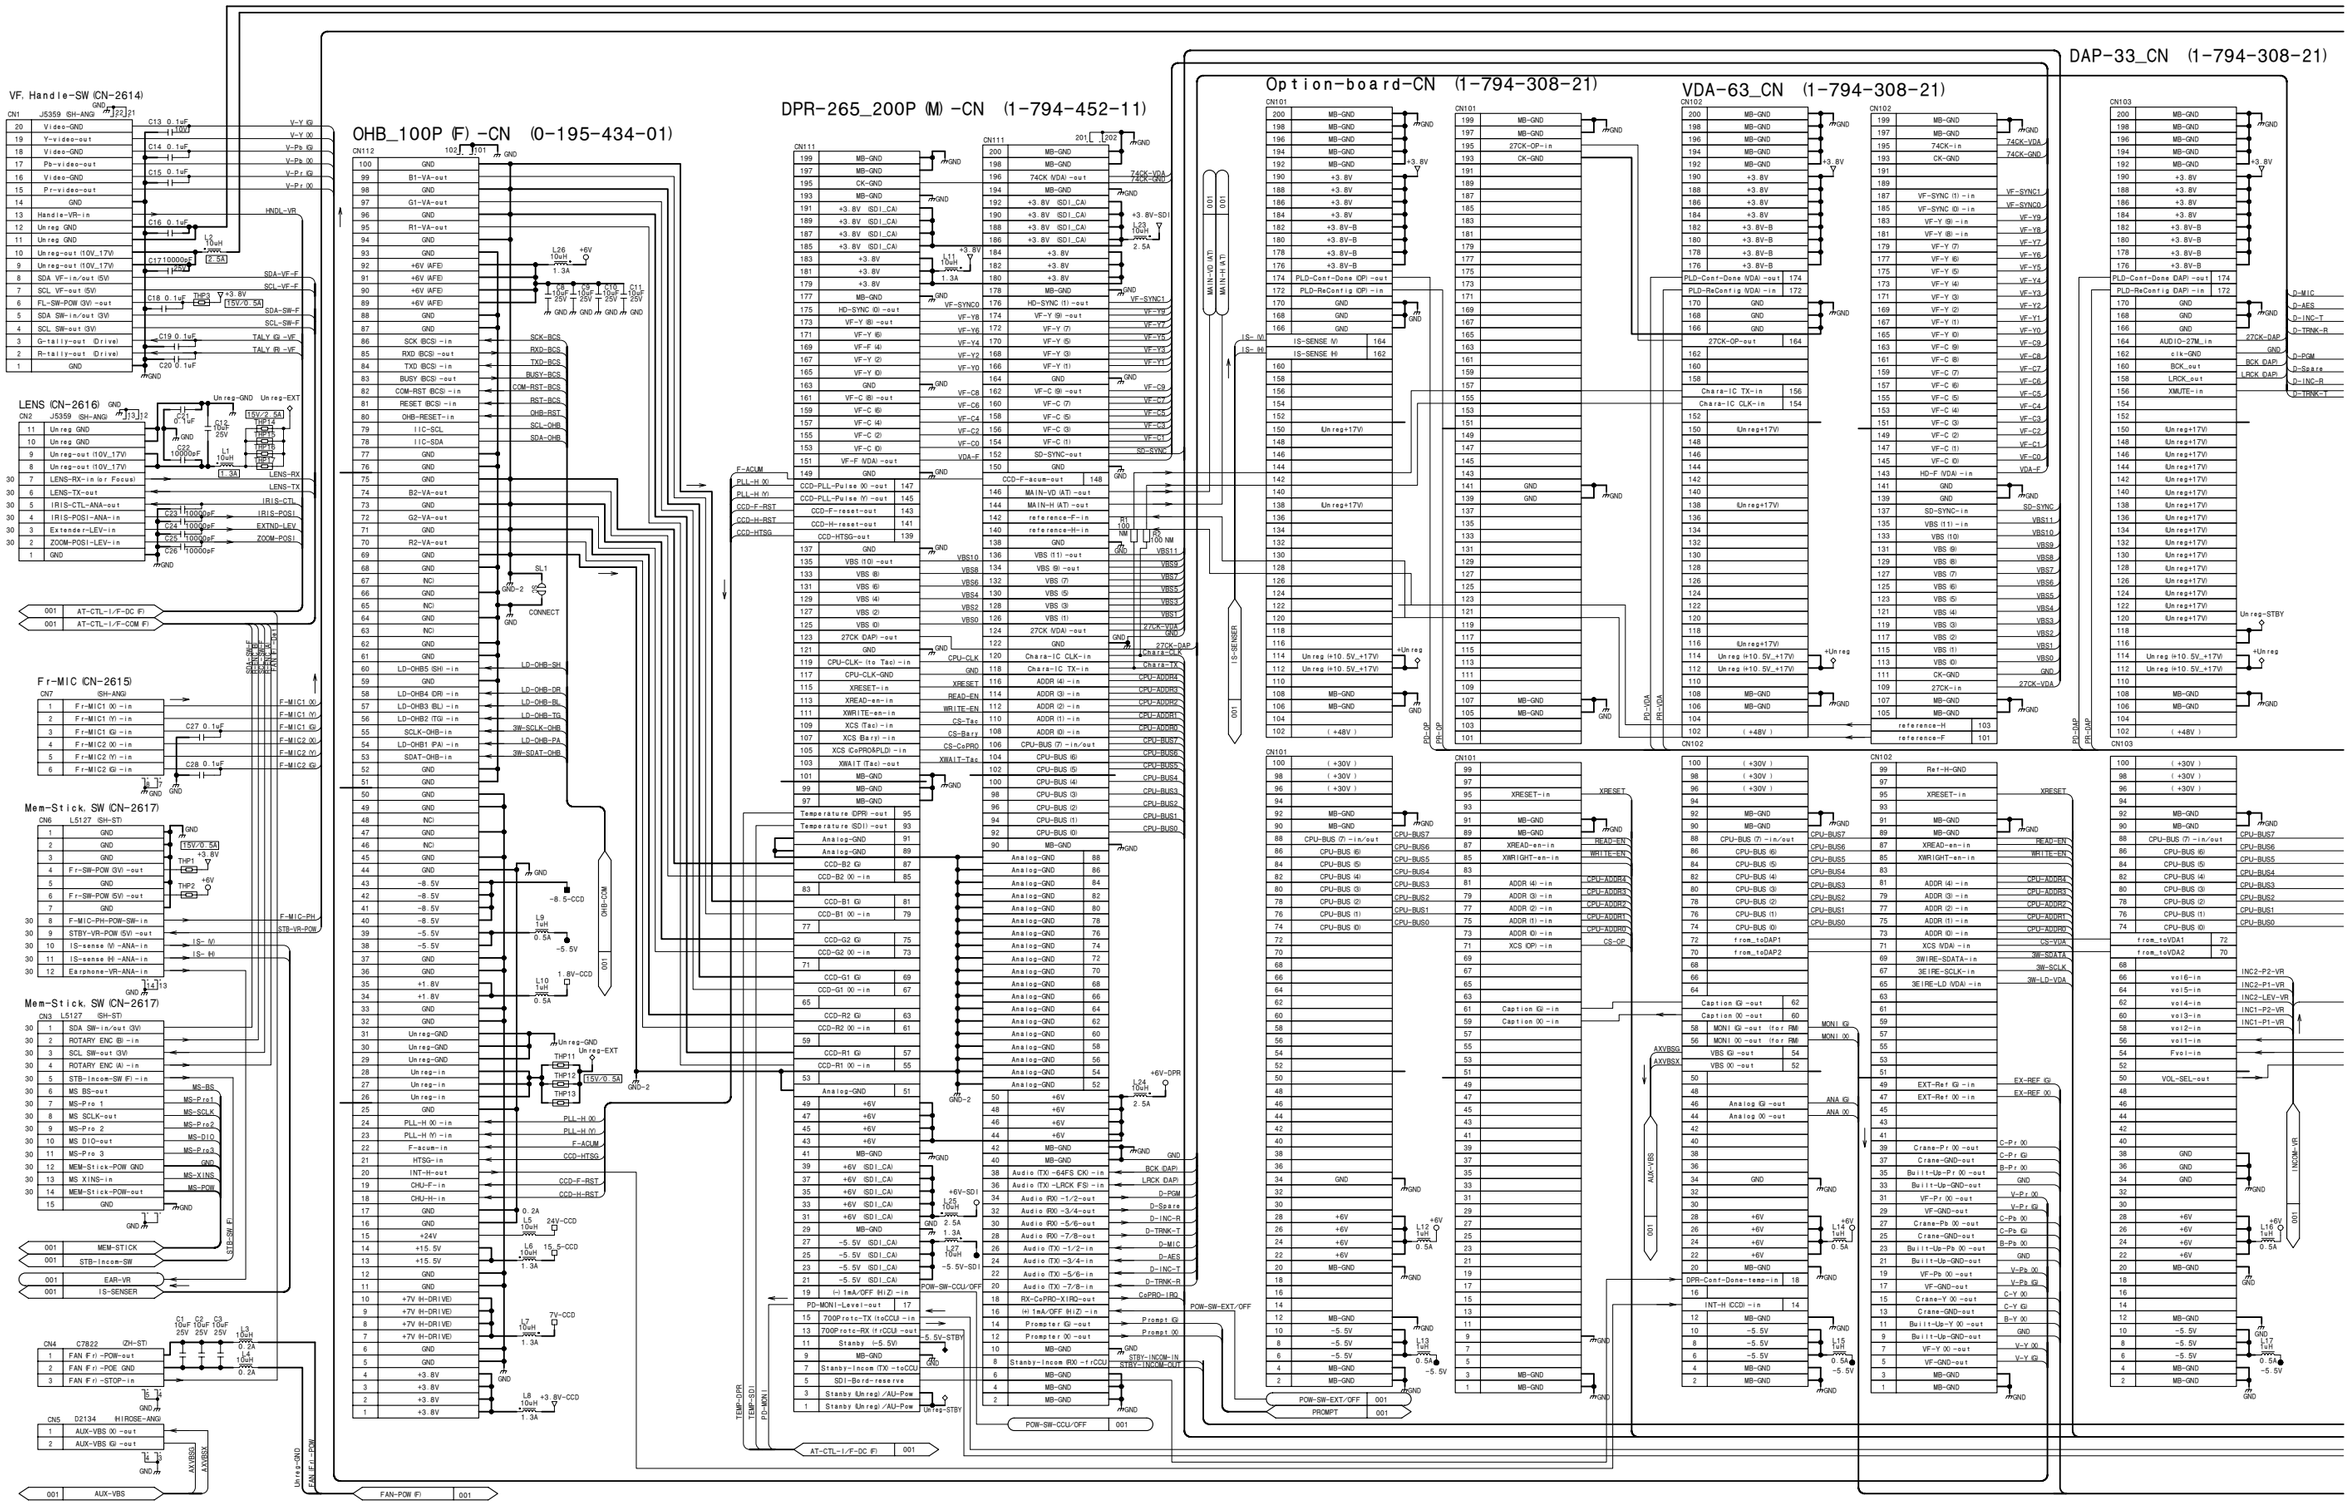
VF. Handle-SW (CN-2614)
OHB_100P (F) -CN (0-195-434-01)
DPR-265_200P (M) -CN (1-794-452-11)
Option-board-CN (1-794-308-21)
VDA-63_CN (1-794-308-21)
DAP-33_CN (1-794-308-21)
LENS (CN-2616)
Fr-MIC (CN-2615)
Mem-Stick. SW (CN-2617)
Mem-Stick. SW (CN-2617)
V-Y (G)
V-Y (X)
V-Pb (G)
V-Pb (X)
V-Pr (G)
V-Pr (X)
HNDL-VR
SDA-VF-F
SCL-VF-F
SDA-SW-F
SCL-SW-F
TALY (G) -VF
TALY (R) -VF
LENS-RX
LENS-TX
IRIS-CTL
IRIS-POSI
EXTND-LEV
ZOOM-POSI
F-MIC1 (X)
F-MIC1 (Y)
F-MIC1 (G)
F-MIC2 (X)
F-MIC2 (Y)
F-MIC2 (G)
F-MIC-PH
STBY-VR-POW
IS- (Y)
IS- (X)
MS-BS
MS-Pro1
MS-SCLK
MS-Pro2
MS-DIO
MS-Pro3
MS-XINS
MS-POW
SCK-BCS
RXD-BCS
TXD-BCS
BUSY-BCS
COM-RST-BCS
RST-BCS
OHB-RST
SCL-OHB
SDA-OHB
LD-OHB-SH
LD-OHB-DR
LD-OHB-BL
LD-OHB-TG
3W-SCLK-OHB
LD-OHB-PA
3W-SDAT-OHB
-8.5-CCD
-5.5V
1.8V-CCD
Unreg-GND
Unreg-EXT
PLL-H (X)
PLL-H (Y)
F-ACUM
CCD-HTSG
CCD-F-RST
CCD-H-RST
0.2A
24V-CCD
15_5-CCD
7V-CCD
+3.8V-CCD
TEMP-DPR
TEMP-SDI
PD-MON1
AUX-VBS
FAN-POW (F)
MEM-STICK
STB-Incom-SW
EAR-VR
IS-SENSER
AT-CTL-I/F-DC (F)
AT-CTL-I/F-COM (F)
POW-SW-EXT/OFF
PROMPT
POW-SW-CCU/OFF
STBY-INCOM-IN
STBY-INCOM-OUT
CoPRO-IRQ
Prompt (G)
Prompt (X)
Stanby-Incom (RX) -rtCCU
Stanby (Unreg) /AU-Pow
Unreg-STBY
Unreg+17V
Unreg (+10.5V_+17V)
+Unreg
(+48V)
(+30V)
+6V
+3.8V
+3.8V-SDI
+6V-DPR
+Unreg
GND
74CK-VDA
74CK-GND
27CK-DAP
27CK-VDA
XRESET
CPU-BUS7
CPU-BUS6
CPU-BUS5
CPU-BUS4
CPU-BUS3
CPU-BUS2
CPU-BUS1
CPU-BUS0
CPU-ADDR4
CPU-ADDR3
CPU-ADDR2
CPU-ADDR1
CPU-ADDR0
CS-OP
CS-VDA
3W-SDATA
3W-SCLK
3W-LD-VDA
VF-SYNC1
VF-SYNC0
VF-Y9
VF-Y8
VF-Y7
VF-Y6
VF-Y5
VF-Y4
VF-Y3
VF-Y2
VF-Y1
VF-Y0
VF-C9
VF-C8
VF-C7
VF-C6
VF-C5
VF-C4
VF-C3
VF-C2
VF-C1
VF-C0
VDA-F
SD-SYNC
VBS11
VBS10
VBS9
VBS8
VBS7
VBS6
VBS5
VBS4
VBS3
VBS2
VBS1
VBS0
D-MIC
D-AES
D-INC-R
D-TRNK-R
D-PGM
D-Sears
D-INC-L
D-TRNK-T
BCK_DAP
LRCK_DAP
27CK-DAP
EX-REF (G)
EX-REF (X)
INCOM-VR
MONI (G)
MONI (X)
ANA (G)
ANA (X)
C-Pr (X)
C-Pr (G)
B-Pr (X)
C-Pb (X)
C-Pb (G)
B-Pb (X)
V-Pb (X)
V-Pb (G)
C-Y (X)
C-Y (G)
B-Y (X)
V-Y (X)
V-Y (G)
AXVBSG
AXVBSX
PD-VDA
PD-OP
PD-AMP
MAIN-VD (ATT)
MAIN-H (ATT)
IS-SENSER
IS- (X)
IS- (H)
IS-SENSE (V)
IS-SENSE (H)
27CK-OP-in
27CK-OP-out
Chara-IC TX-in
Chara-IC CLK-in
HD-F (VDA) -in
SD-SYNC-in
VBS (11) -in
VBS (10)
VBS (9)
VBS (8)
VBS (7)
VBS (6)
VBS (5)
VBS (4)
VBS (3)
VBS (2)
VBS (1)
VBS (0)
CK-GND
27CK-in
reference-H
reference-F
PLD-Conf-Done (VDA) -in
PLD-ReConfig (VDA) -in
INT-H (CCD) -in
Ref-H-GND
XRESET-in
MB-GND
XREAD-en-in
XWRIGHT-en-in
ADDR (4) -in
ADDR (3) -in
ADDR (2) -in
ADDR (1) -in
ADDR (0) -in
XCS (DP) -in
3WIRE-SDATA-in
3EIRE-SCLK-in
3EIRE-LD (VDA) -in
Caption (G) -out
Caption (X) -out
MONI (G) -out (for FM)
MONI (X) -out (for FM)
VBS (G) -out
VBS (X) -out
Analog (G) -out
Analog (X) -out
EXT-Ref (G) -in
EXT-Ref (X) -in
Crane-Pr (X) -out
Crane-GND-out
Built-Up-Pr (X) -out
Built-Up-GND-out
VF-Pr (X) -out
VF-GND-out
Crane-Pb (X) -out
Crane-GND-out
Built-Up-GND-out
VF-Pb (X) -out
VF-GND-out
Crane-Y (X) -out
Crane-GND-out
Built-Up-Y (X) -out
Built-Up-GND-out
VF-Y (X) -out
VF-GND-out
MB-GND
from_toDAP1
from_toDAP2
from_toVDA1
from_toVDA2
VOL-SEL-out
INC2-P2-VR
INC2-P1-VR
INC2-LEV-VR
INC1-P2-VR
INC1-P1-VR
vol6-in
vol5-in
vol4-in
vol3-in
vol2-in
vol1-in
Fvol-in
XMUTE-in
AUDIO-27M_in
clk-GND
BCK_out
LRCK_out
D-MIC
D-AES
D-INC-T
D-TRNK-R
D-PGM
D-Sears
D-INC-R
D-TRNK-T
27CK-DAP
BCK DAP)
LRCK DAP)
Unreg-STBY
+Unreg
GND
+3.8V
+6V
+6V
+6

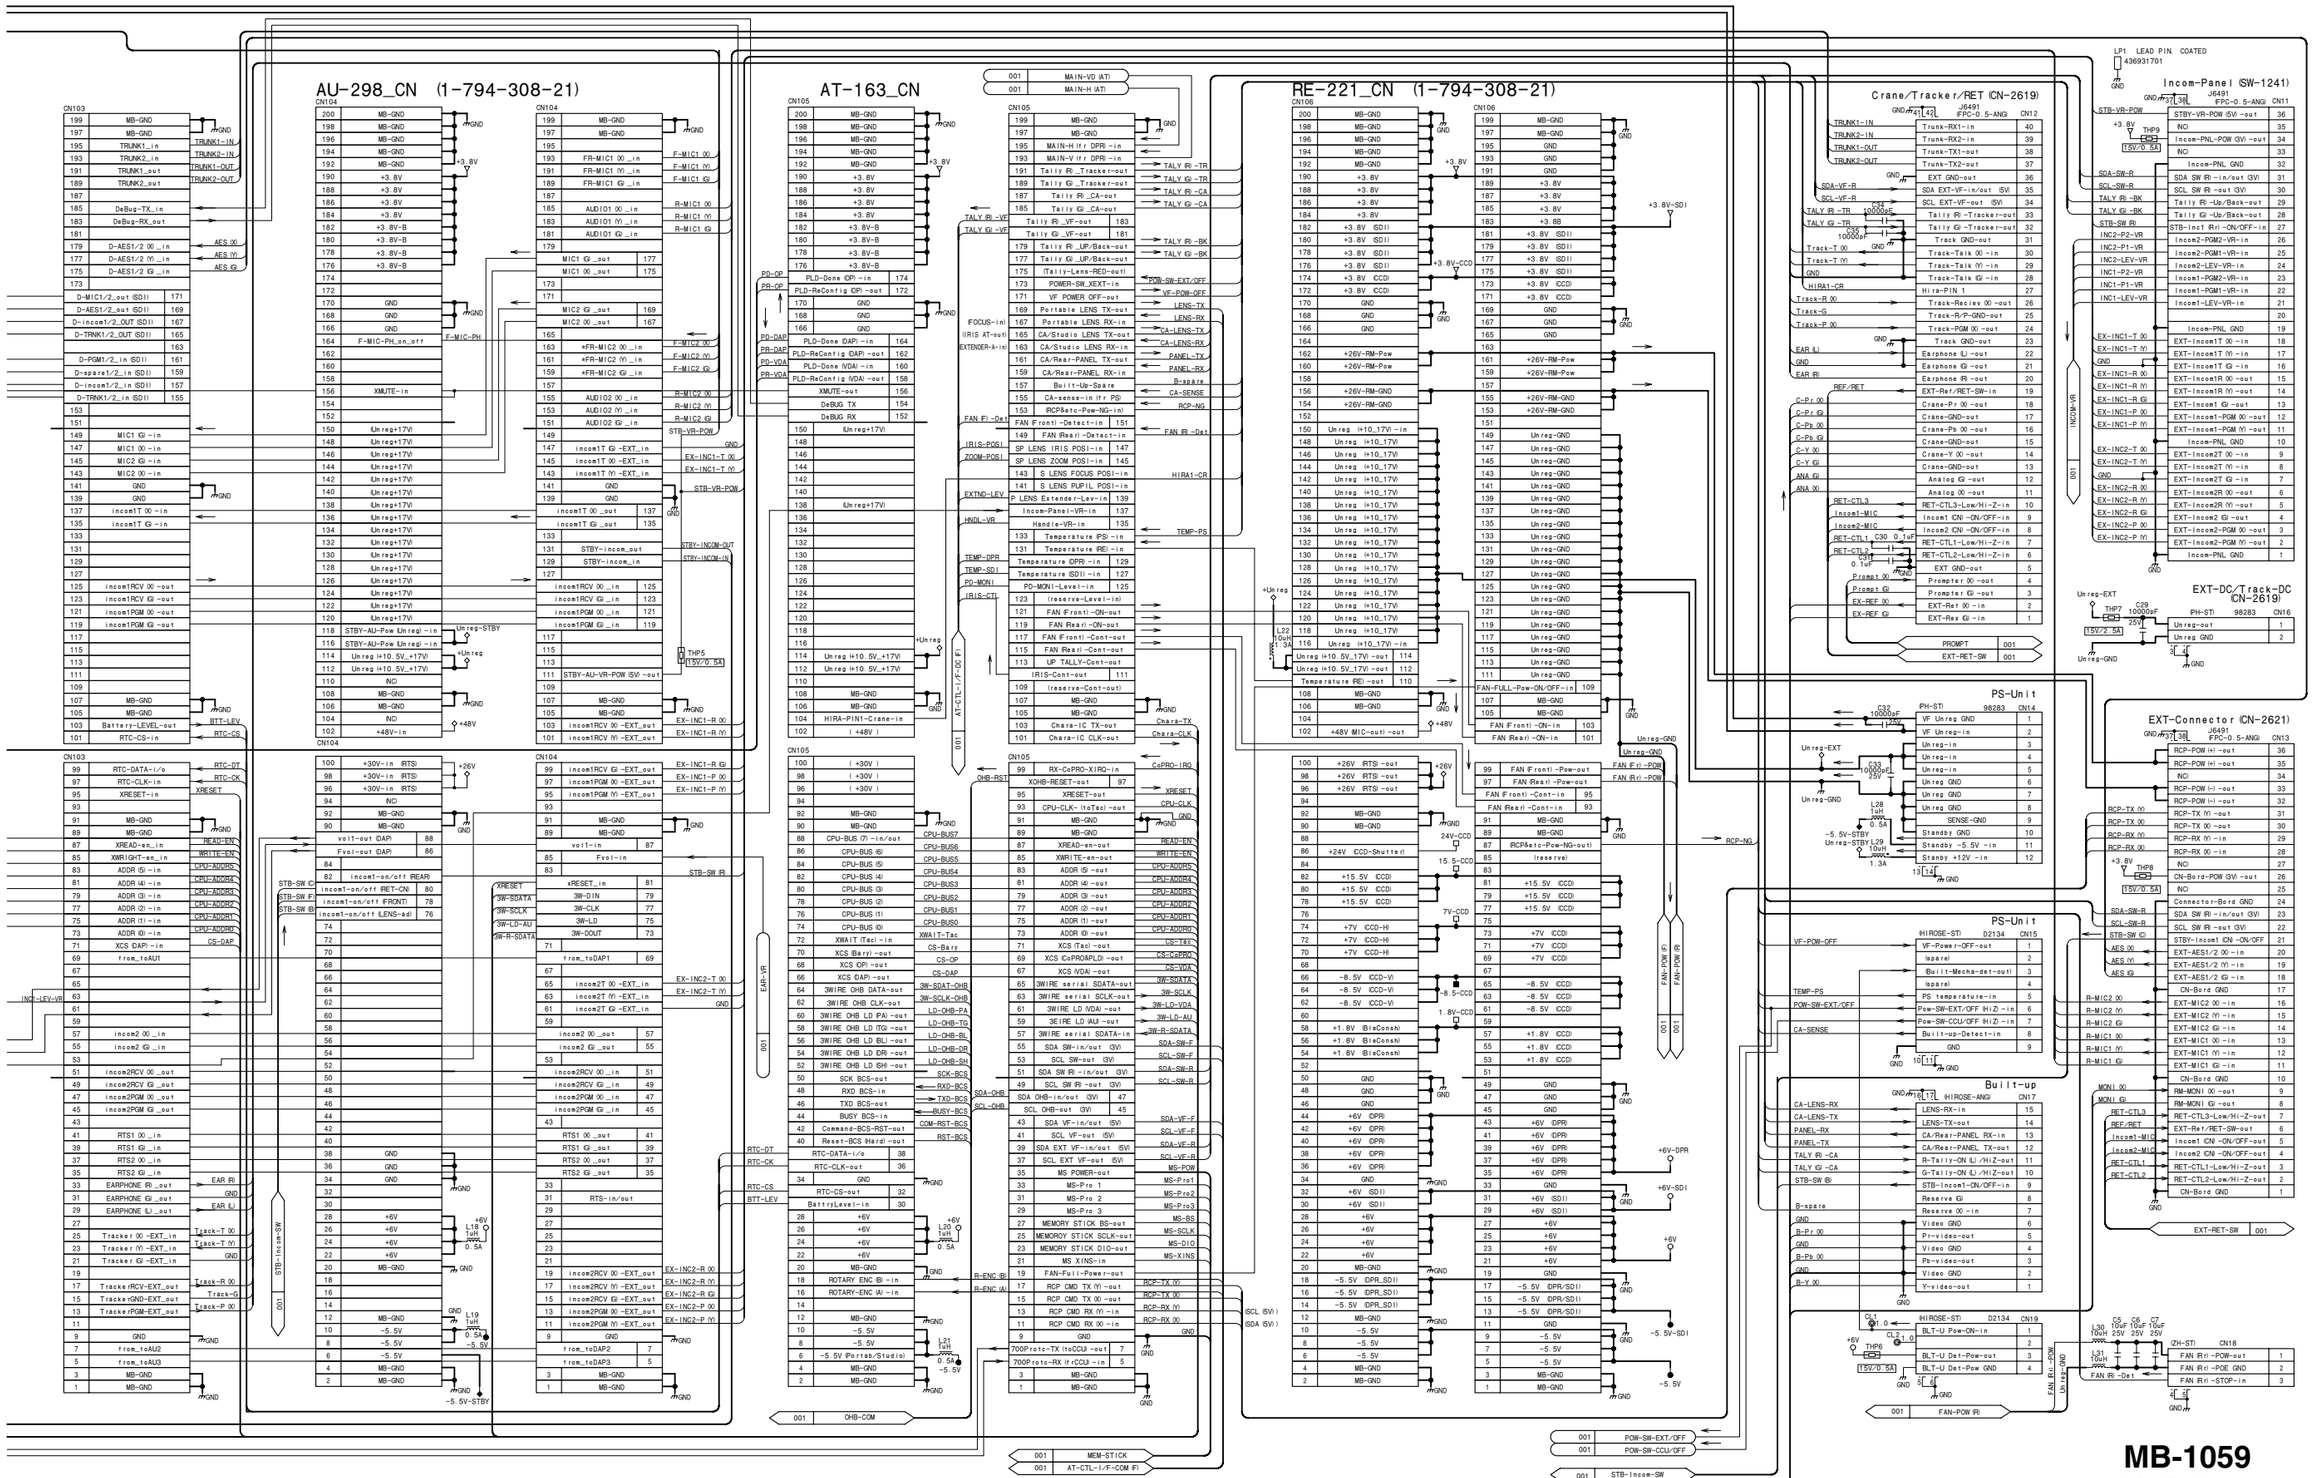
AU-298_CN (1-794-308-21)
AT-163_CN
RE-221_CN (1-794-308-21)
Crane/Tracker/RET (CN-2619)
Incom-Panel (SW-1241)
PS-Unit
EXT-Connector (CN-2621)
EXT-DC/Track-DC (CN-2619)
Built-up
MB-1059
BOARD NO. 1-865-928-14
HDC-1500_MB-1059_014_1

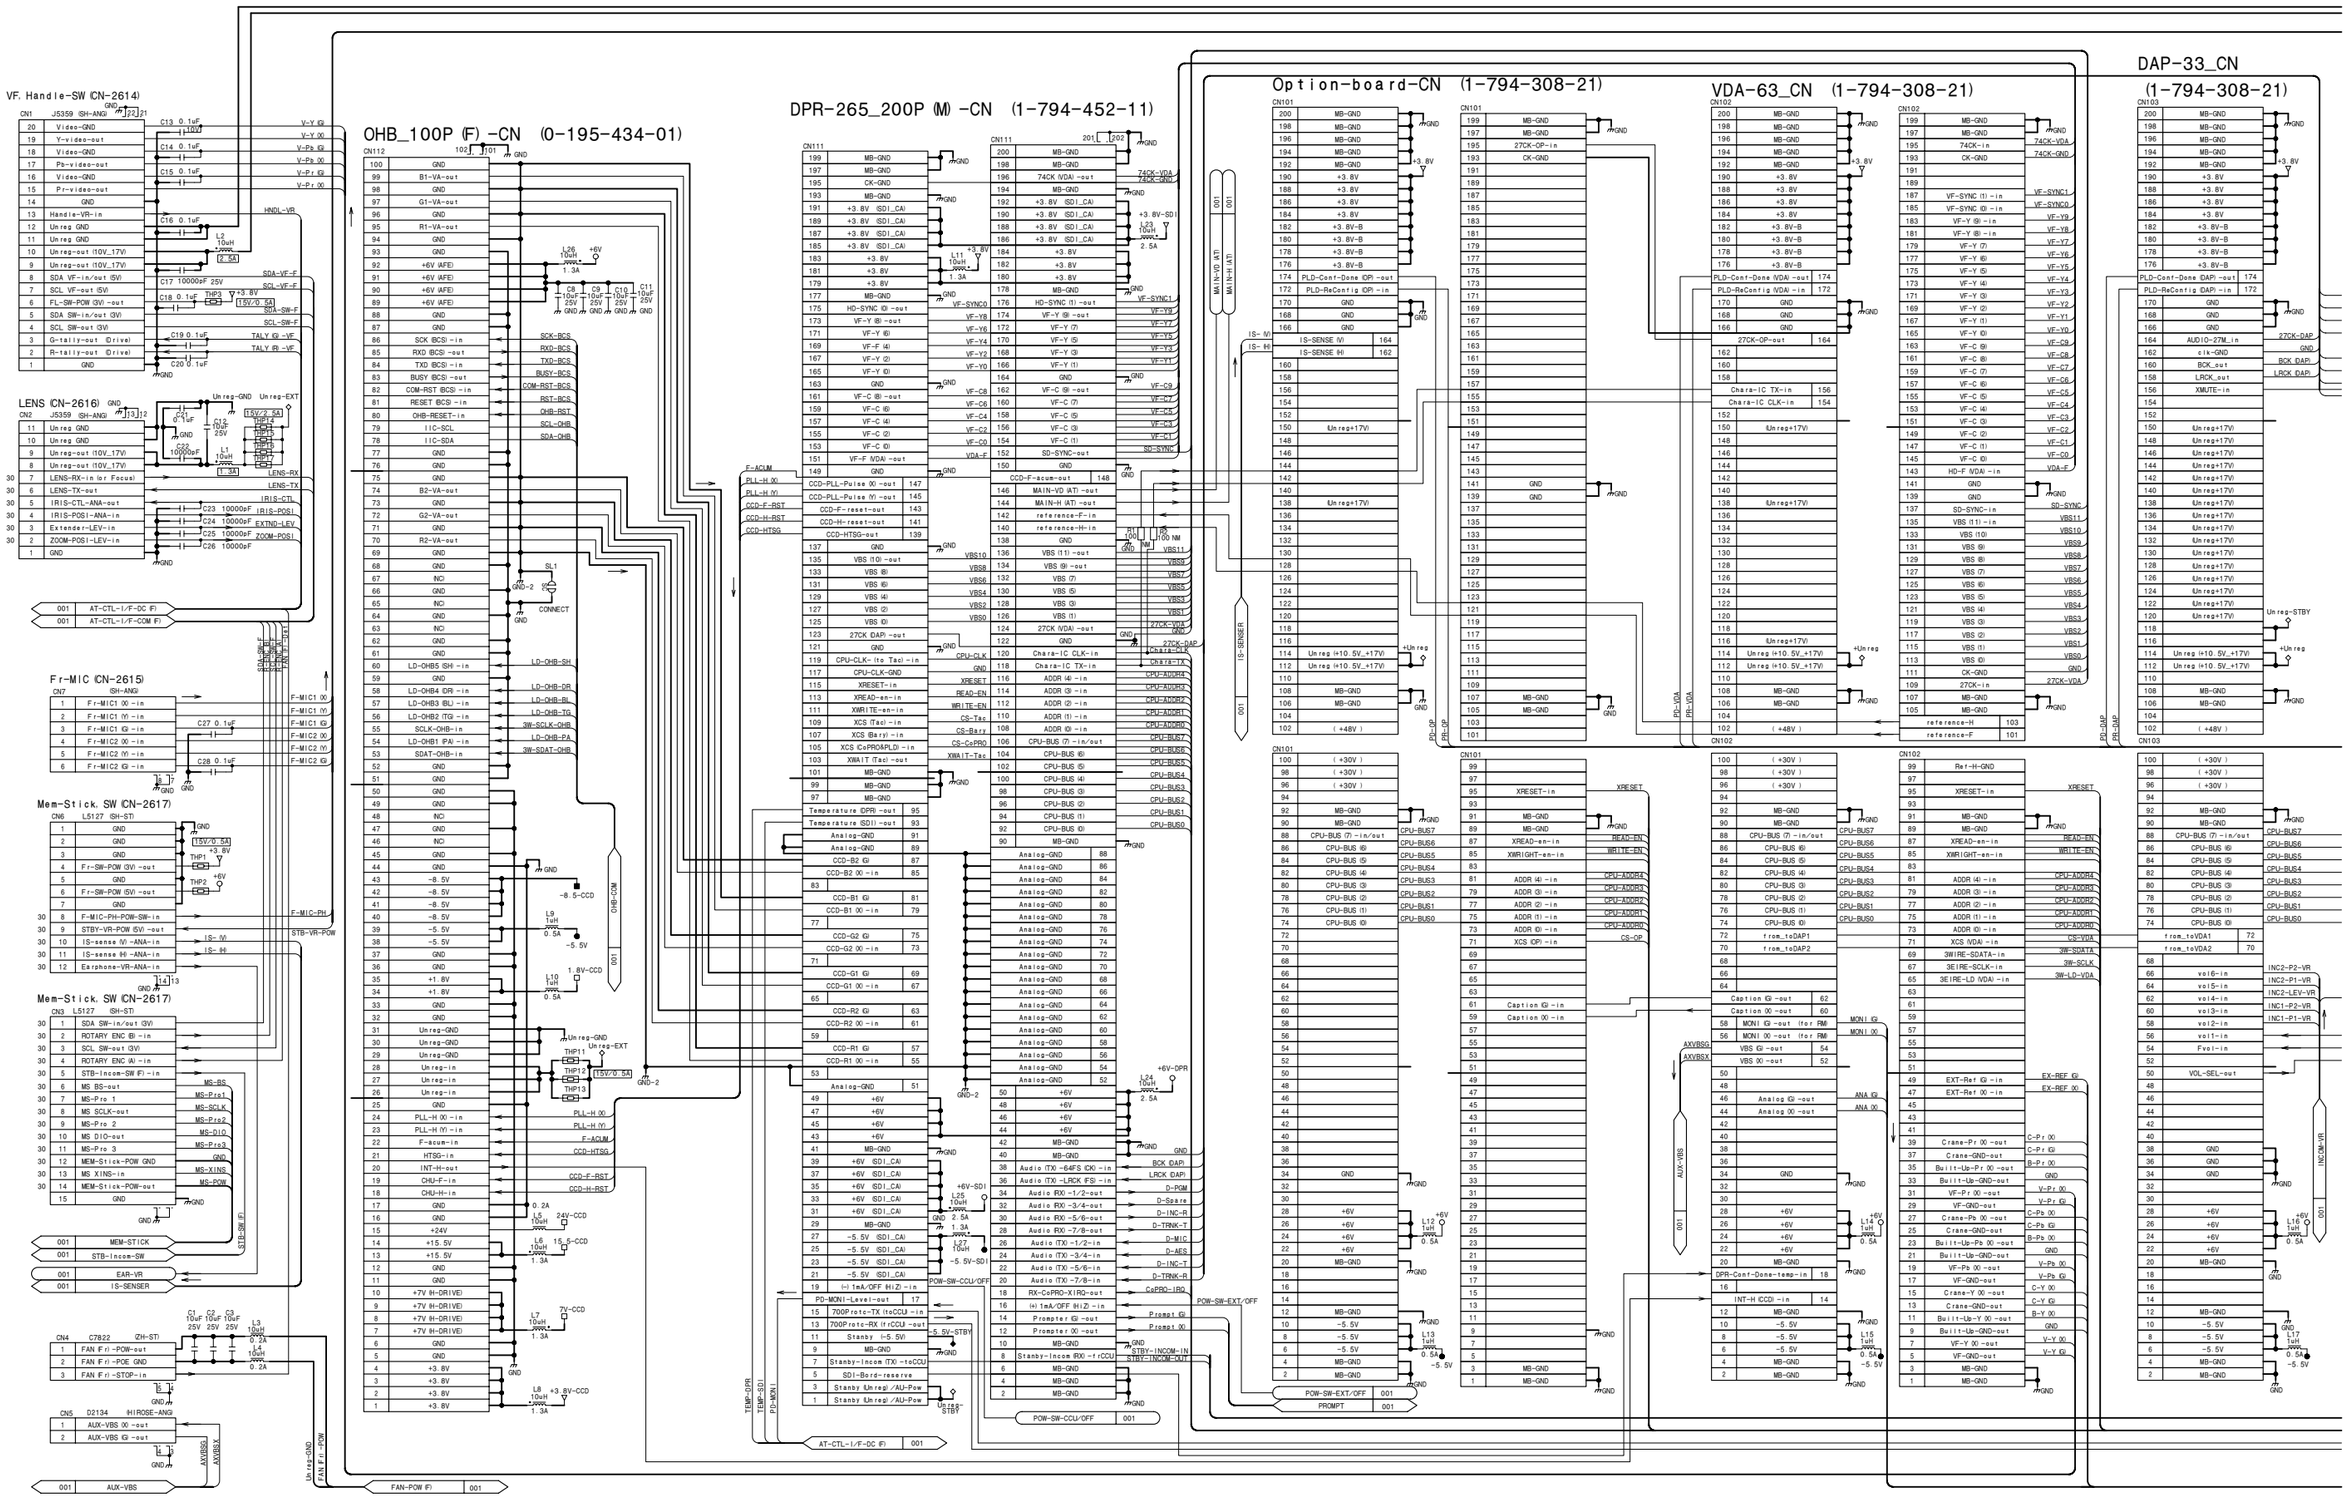

VF. Handle-SW (CN-2614)
LENS (CN-2616)
Fr-MIC (CN-2615)
Mem-Stick. SW (CN-2617)
Mem-Stick. SW (CN-2617)
OHB_100P (F) -CN (0-195-434-01)
DPR-265_200P (M) -CN (1-794-452-11)
Option-board-CN (1-794-308-21)
VDA-63_CN (1-794-308-21)
DAP-33_CN
(1-794-308-21)
AT-CTL-I/F-DC (F)
FAN-POW (F)
AUX-VBS
STB-SW (F)
MEM-STICK
STB-Incon-SW
EAR-VR
IS-SENSER

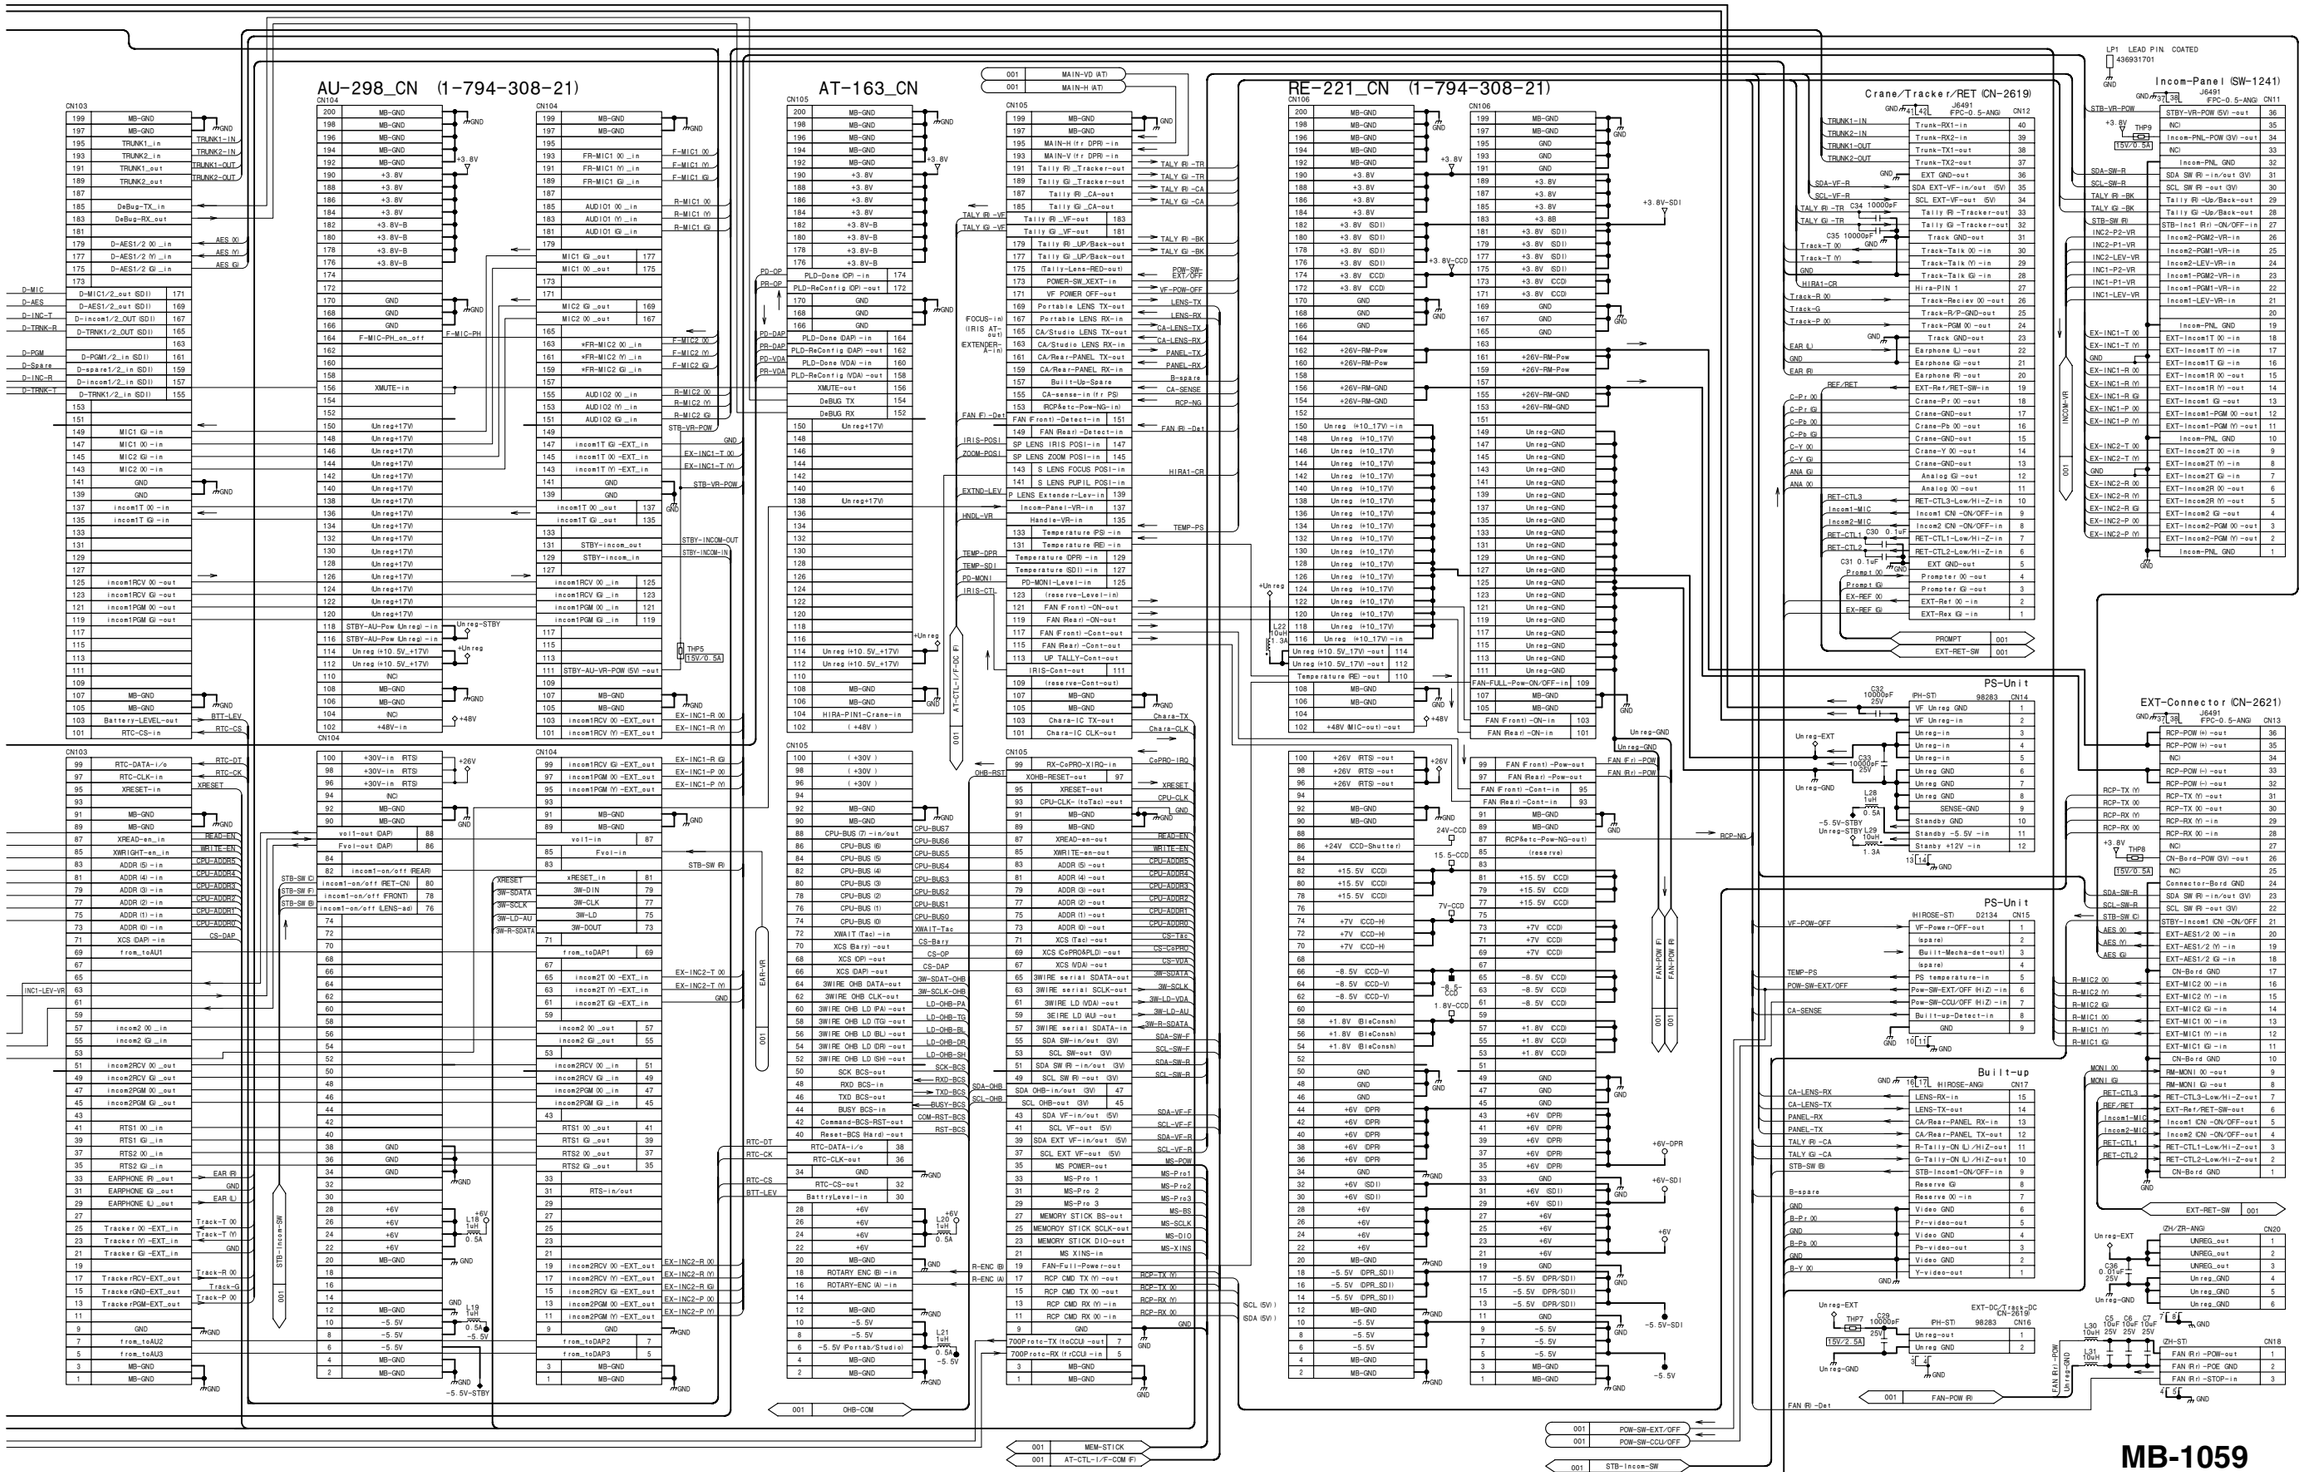
AU-298_CN (1-794-308-21)
AT-163_CN
RE-221_CN (1-794-308-21)
Crane/Tracker/RET (CN-2619)
Incom-Panel (SW-1241)
PS-Unit
EXT-Connector (CN-2621)
Built-up
MB-1059
BOARD NO. 1-865-928-15
HDC-1500_MB-1059_015_1

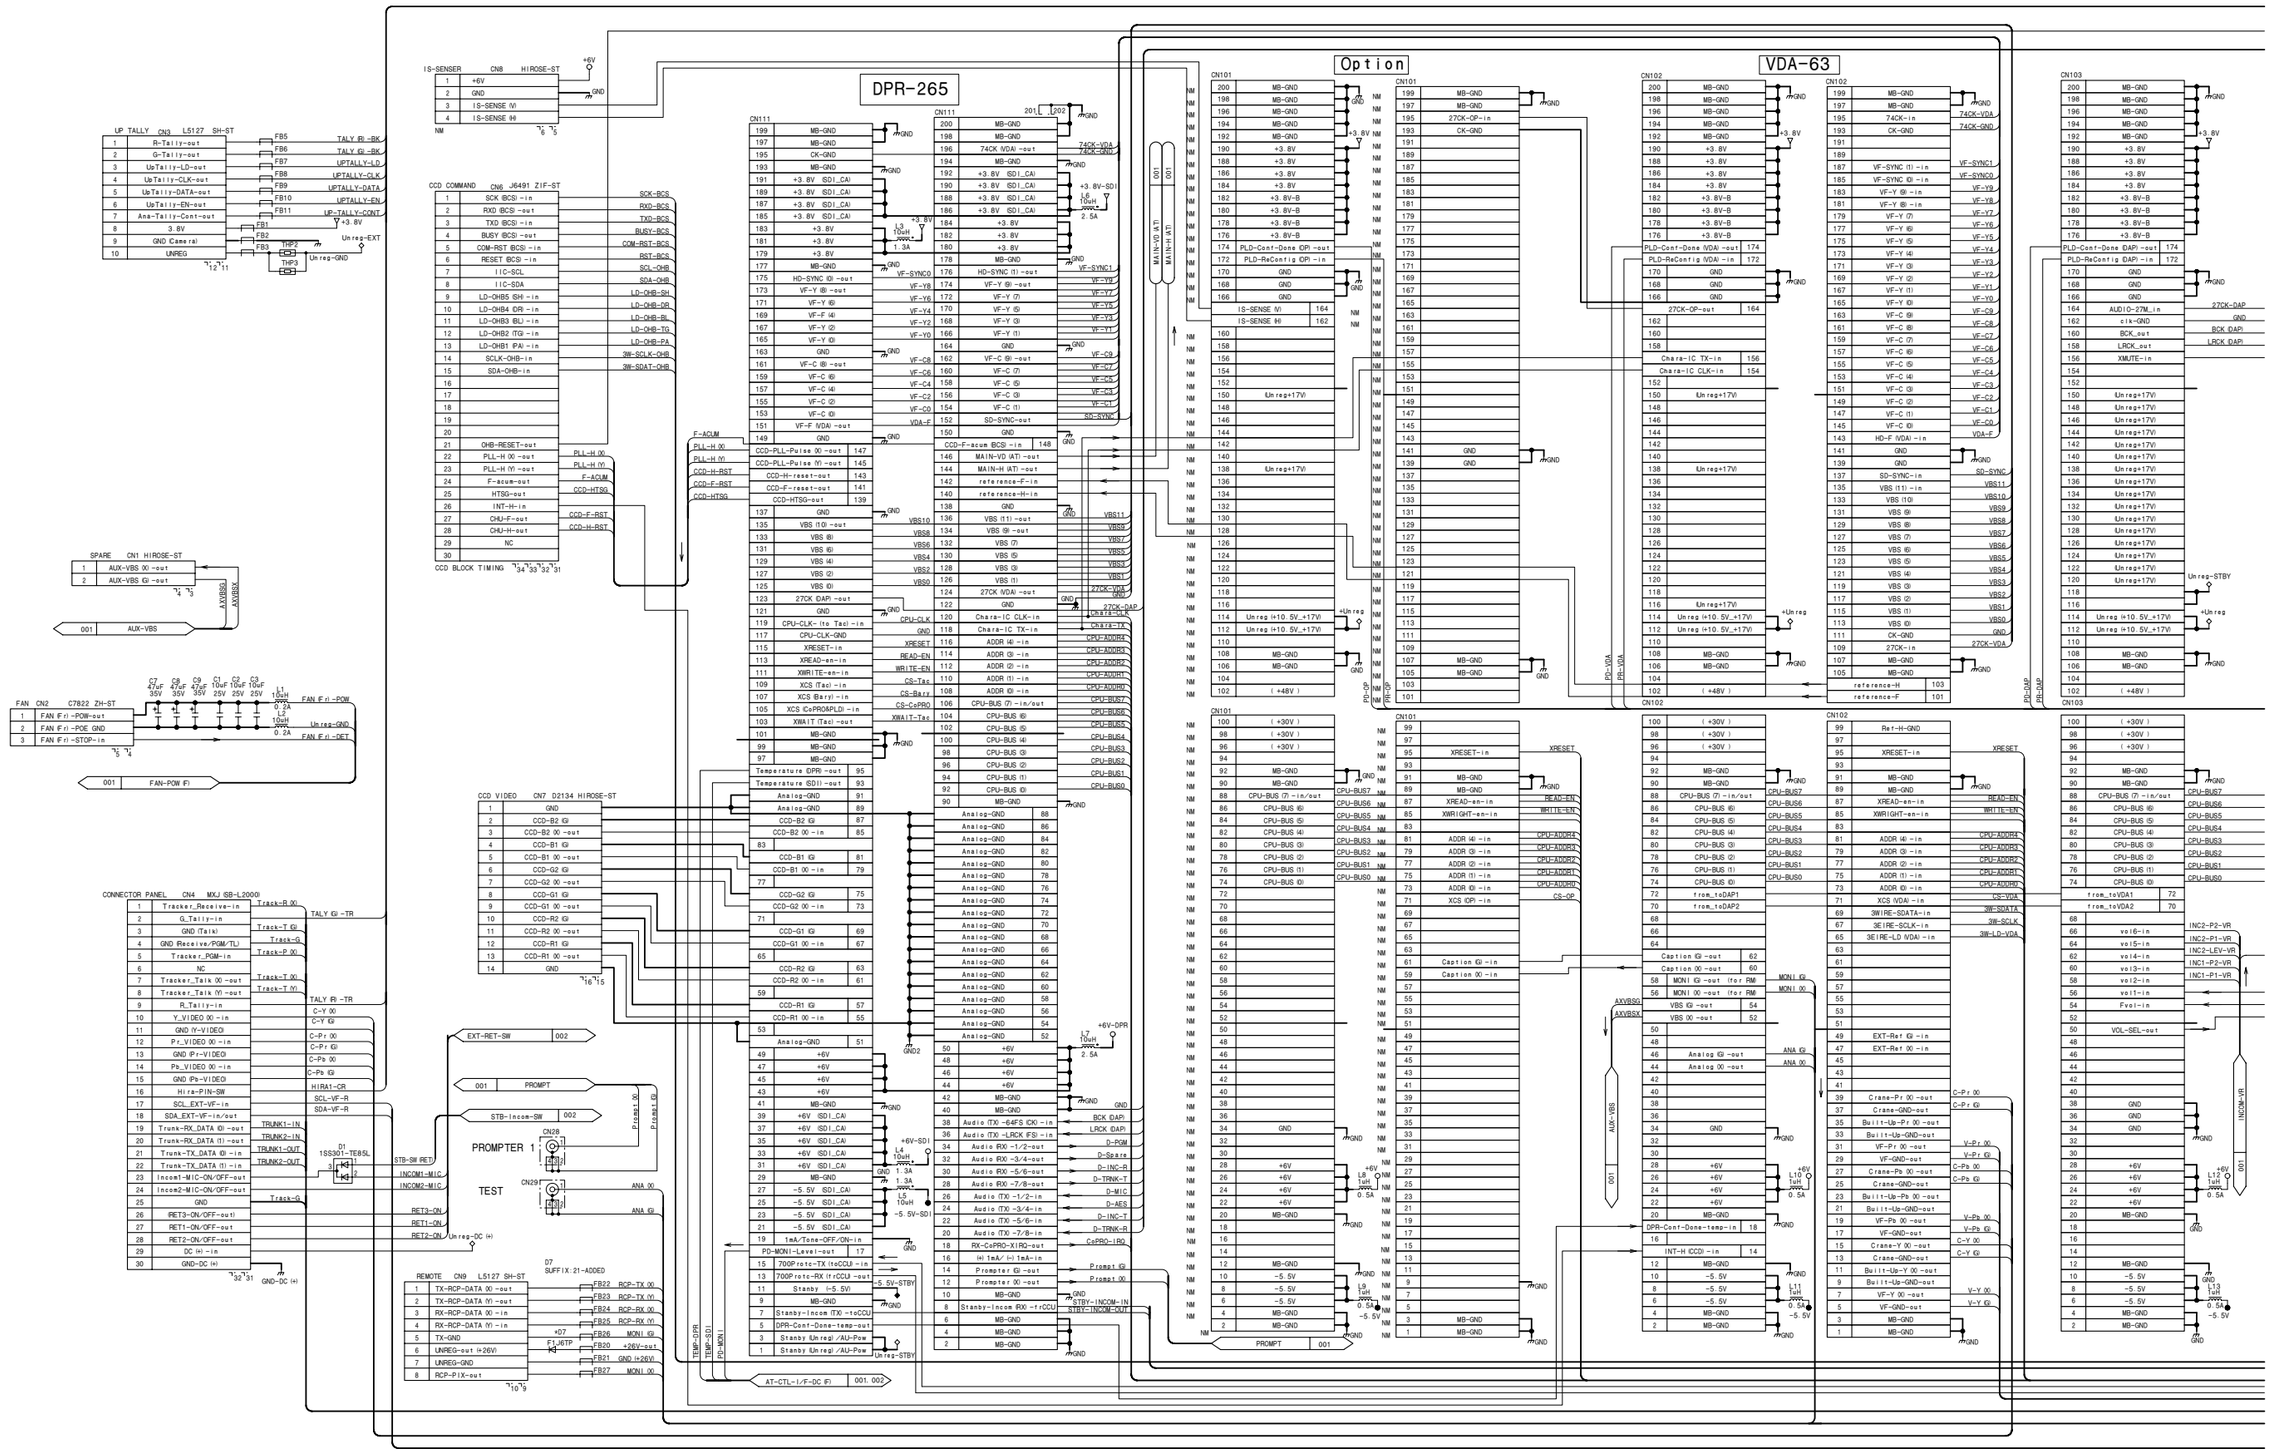

DPR-265
Option
VDA-63
CN111
CN101
CN102
CN103
UP TALLY CN3 L5127 SH-ST
IS-SENSER CN8 HIROSE-ST
CCD COMMAND CN6 J6491 ZIF-ST
CCD BLOCK TIMING
SPARE CN1 HIROSE-ST
FAN CN2 C7822 ZH-ST
CONNECTOR PANEL CN4 MXJ ISB-L2000
CCD VIDEO CN7 D2134 HIROSE-ST
REMOTE CN9 L5127 SH-ST
PROMPTER 1
TEST
CN28
CN29
EXT-RET-SW 002
STB-Incos-SW 002
PROMPT 001
AT-CTL-I/F-DC (F) 001, 002
AUX-VBS 001
FAN-POW (F) 001
MAIN-VD (AT)
MAIN-H (AT)
F-ACUM
PD-CP
PD-VDA
PD-DAP
AUX-VBS
INCOM-VR

MB-1060 (1/2)
SUFFIX: -12, 21

MB-1060 (1/2)
SUFFIX: -12, 21

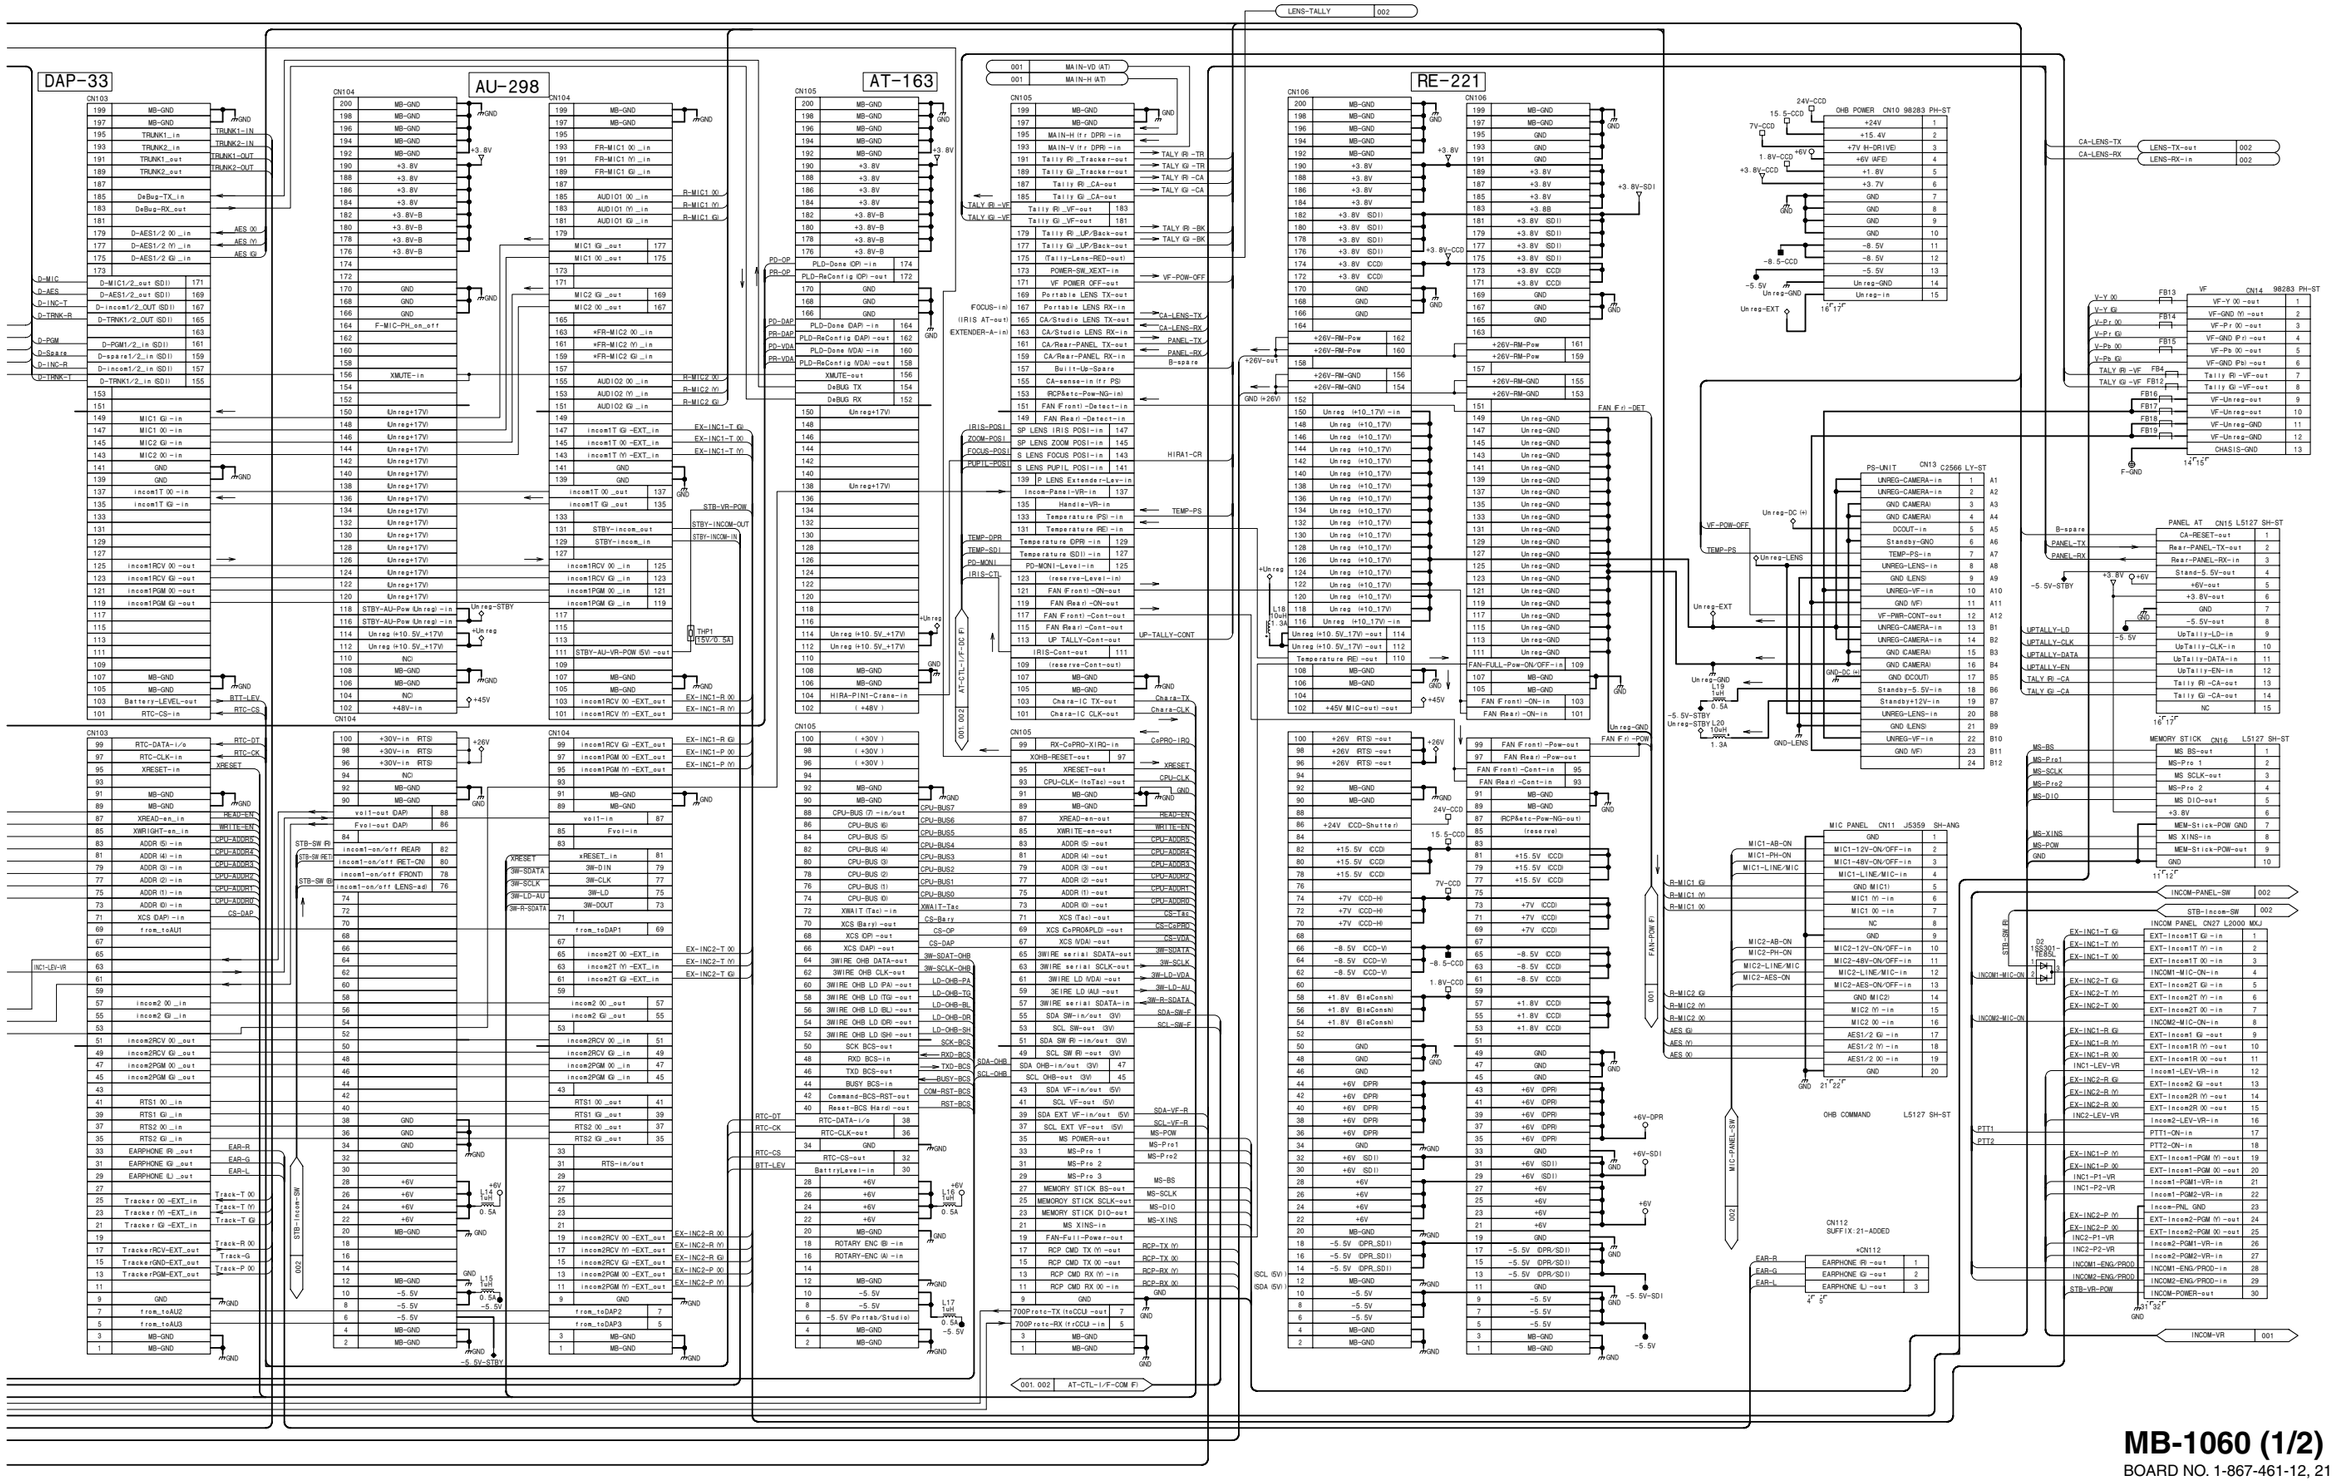
DAP-33
AU-298
AT-163
RE-221
LENS-TALLY
CA-LENS-TX
CA-LENS-RX
LENS-TX-out
LENS-RX-in
OHB POWER CN10 98283 PH-ST
PS-UNIT CN13 C2566 LY-ST
PANEL AT CN15 L5127 SH-ST
MIC PANEL CN11 J5359 SH-ANG
MEMORY STICK CN16 L5127 SH-ST
VF CN14 98283 PH-ST
CN112 SUFFIX: 21-ADDED
OHB COMMAND L5127 SH-ST
INCOM PANEL CN27 L2000 MXJ
AT-CTL-I/F-SUB (F)
AT-CTL-I/F-COM (F)
MIC-PANEL-SW
STB-Incom-SW
STB-VR-POW
INCOM-PANEL-SW
STB-Incom-SW
INCOM-VR
INCOM-MIC-ON
FAN-POW (F)
FAN F/I -DET
FAN F/I -POW
Unreg-EXT
Unreg-LENS
Unreg-DC (+)
VF-POW-OFF
TEMP-PS
Unreg-GND
Unreg-STBY
+5V-STBY
+3.8V
+6V
+26V
+45V
-5.5V
-8.5V
-5.5V-STBY
GND
F-GND
GND-DC (-)
GND-LENS
+26V-out
GND (+26V)
+Unreg
+26V-SDI
+6V-OPR
-5.5V-SDI
+3.8V-SDI
+3.8V-CCD
+24V-CCD
+7V-CCD
+1.8V-CCD
-8.5-CCD
15.5-CCD
24V-CCD
7V-CCD
1.8V-CCD
TALY FR -TR
TALY FG -TR
TALY FR -CA
TALY FG -CA
TALY FR -BK
TALY FG -BK
TALY FR -VF
TALY FG -VF
TALY FR -CA
TALY FG -CA
VF-POW-OFF
CA-LENS-TX
CA-LENS-RX
PANEL-TX
PANEL-RX
B-spare
HIRA1-CR
TEMP-PS
UP-TALLY-CONT
Chara-TX
Chara-CLK
CsPRO-IRQ
XRESET
CPU-CLK
HEAU-EN
WRITE-EN
CPU-ADDR0
CPU-ADDR1
CPU-ADDR2
CPU-ADDR3
CPU-ADDR4
CPU-ADDR5
CPU-ADDR6
CPU-ADDR7
CS-FAN
CS-CsPRO
CS-VGA
3W-SDATA
3W-SCLK
3W-LD-VGA
3W-LD-AU
3W-R-SDATA
SDA-3W-F
SCL-3W-F
SDA-VF-R
SCL-VF-R
MS-POW
MS-Pro1
MS-Pro2
MS-BS
MS-SCLK
MS-DIO
MS-XINS
RCP-TX (Y)
RCP-TX (X)
RCP-RX (Y)
RCP-RX (X)
ISCL (5V)
ISDA (5V)
RTC-DT
RTC-CK
RTC-CS
BTT-LEV
EAR-R
EAR-G
EAR-L
Track-T (X)
Track-T (Y)
Track-T (Z)
Track-R (X)
Track-G
Track-P (X)
EX-INC1-T (Z)
EX-INC1-T (X)
EX-INC1-T (Y)
EX-INC1-R (Z)
EX-INC1-P (X)
EX-INC1-P (Y)
EX-INC2-T (X)
EX-INC2-T (Y)
EX-INC2-T (Z)
EX-INC2-R (X)
EX-INC2-R (Y)
EX-INC2-R (Z)
EX-INC2-P (X)
EX-INC2-P (Y)
R-MIC1 (X)
R-MIC1 (Y)
R-MIC1 (Z)
R-MIC2 (X)
R-MIC2 (Y)
R-MIC2 (Z)
AES (X)
AES (Y)
AES (Z)
PTT1
PTT2
UPTALLY-LD
UPTALLY-CLK
UPTALLY-DATA
UPTALLY-EN
TALY FR -CA
TALY FG -CA
MS-BS
MS-Pro1
MS-SCLK
MS-Pro2
MS-DIO
MS-XINS
MS-POW
GND
+3.8V
+6V
-5.5V
-8.5V
-5.5V-STBY
Unreg-GND
Unreg-EXT
Unreg-LENS
Unreg-DC (+)
VF-POW-OFF
TEMP-PS
FAN F/I -DET
FAN F/I -POW
+26V-out
GND (+26V)
+Unreg
+26V-SDI
+6V-OPR
-5.5V-SDI
+3.8V-SDI
+3.8V-CCD
+24V-CCD
+7V-CCD
+1.8V-CCD
-8.5-CCD
15.5-CCD
24V-CCD
7V-CCD
1.8V-CCD
TALY FR -TR
TALY FG -TR
TALY FR -CA
TALY FG -CA
TALY FR -VF
TALY FG -VF
TALY FR -CA
TALY FG -CA
TALY FR -BK
TALY FG -BK


MB-1060 (2/2)
SUFFIX: -12, 21

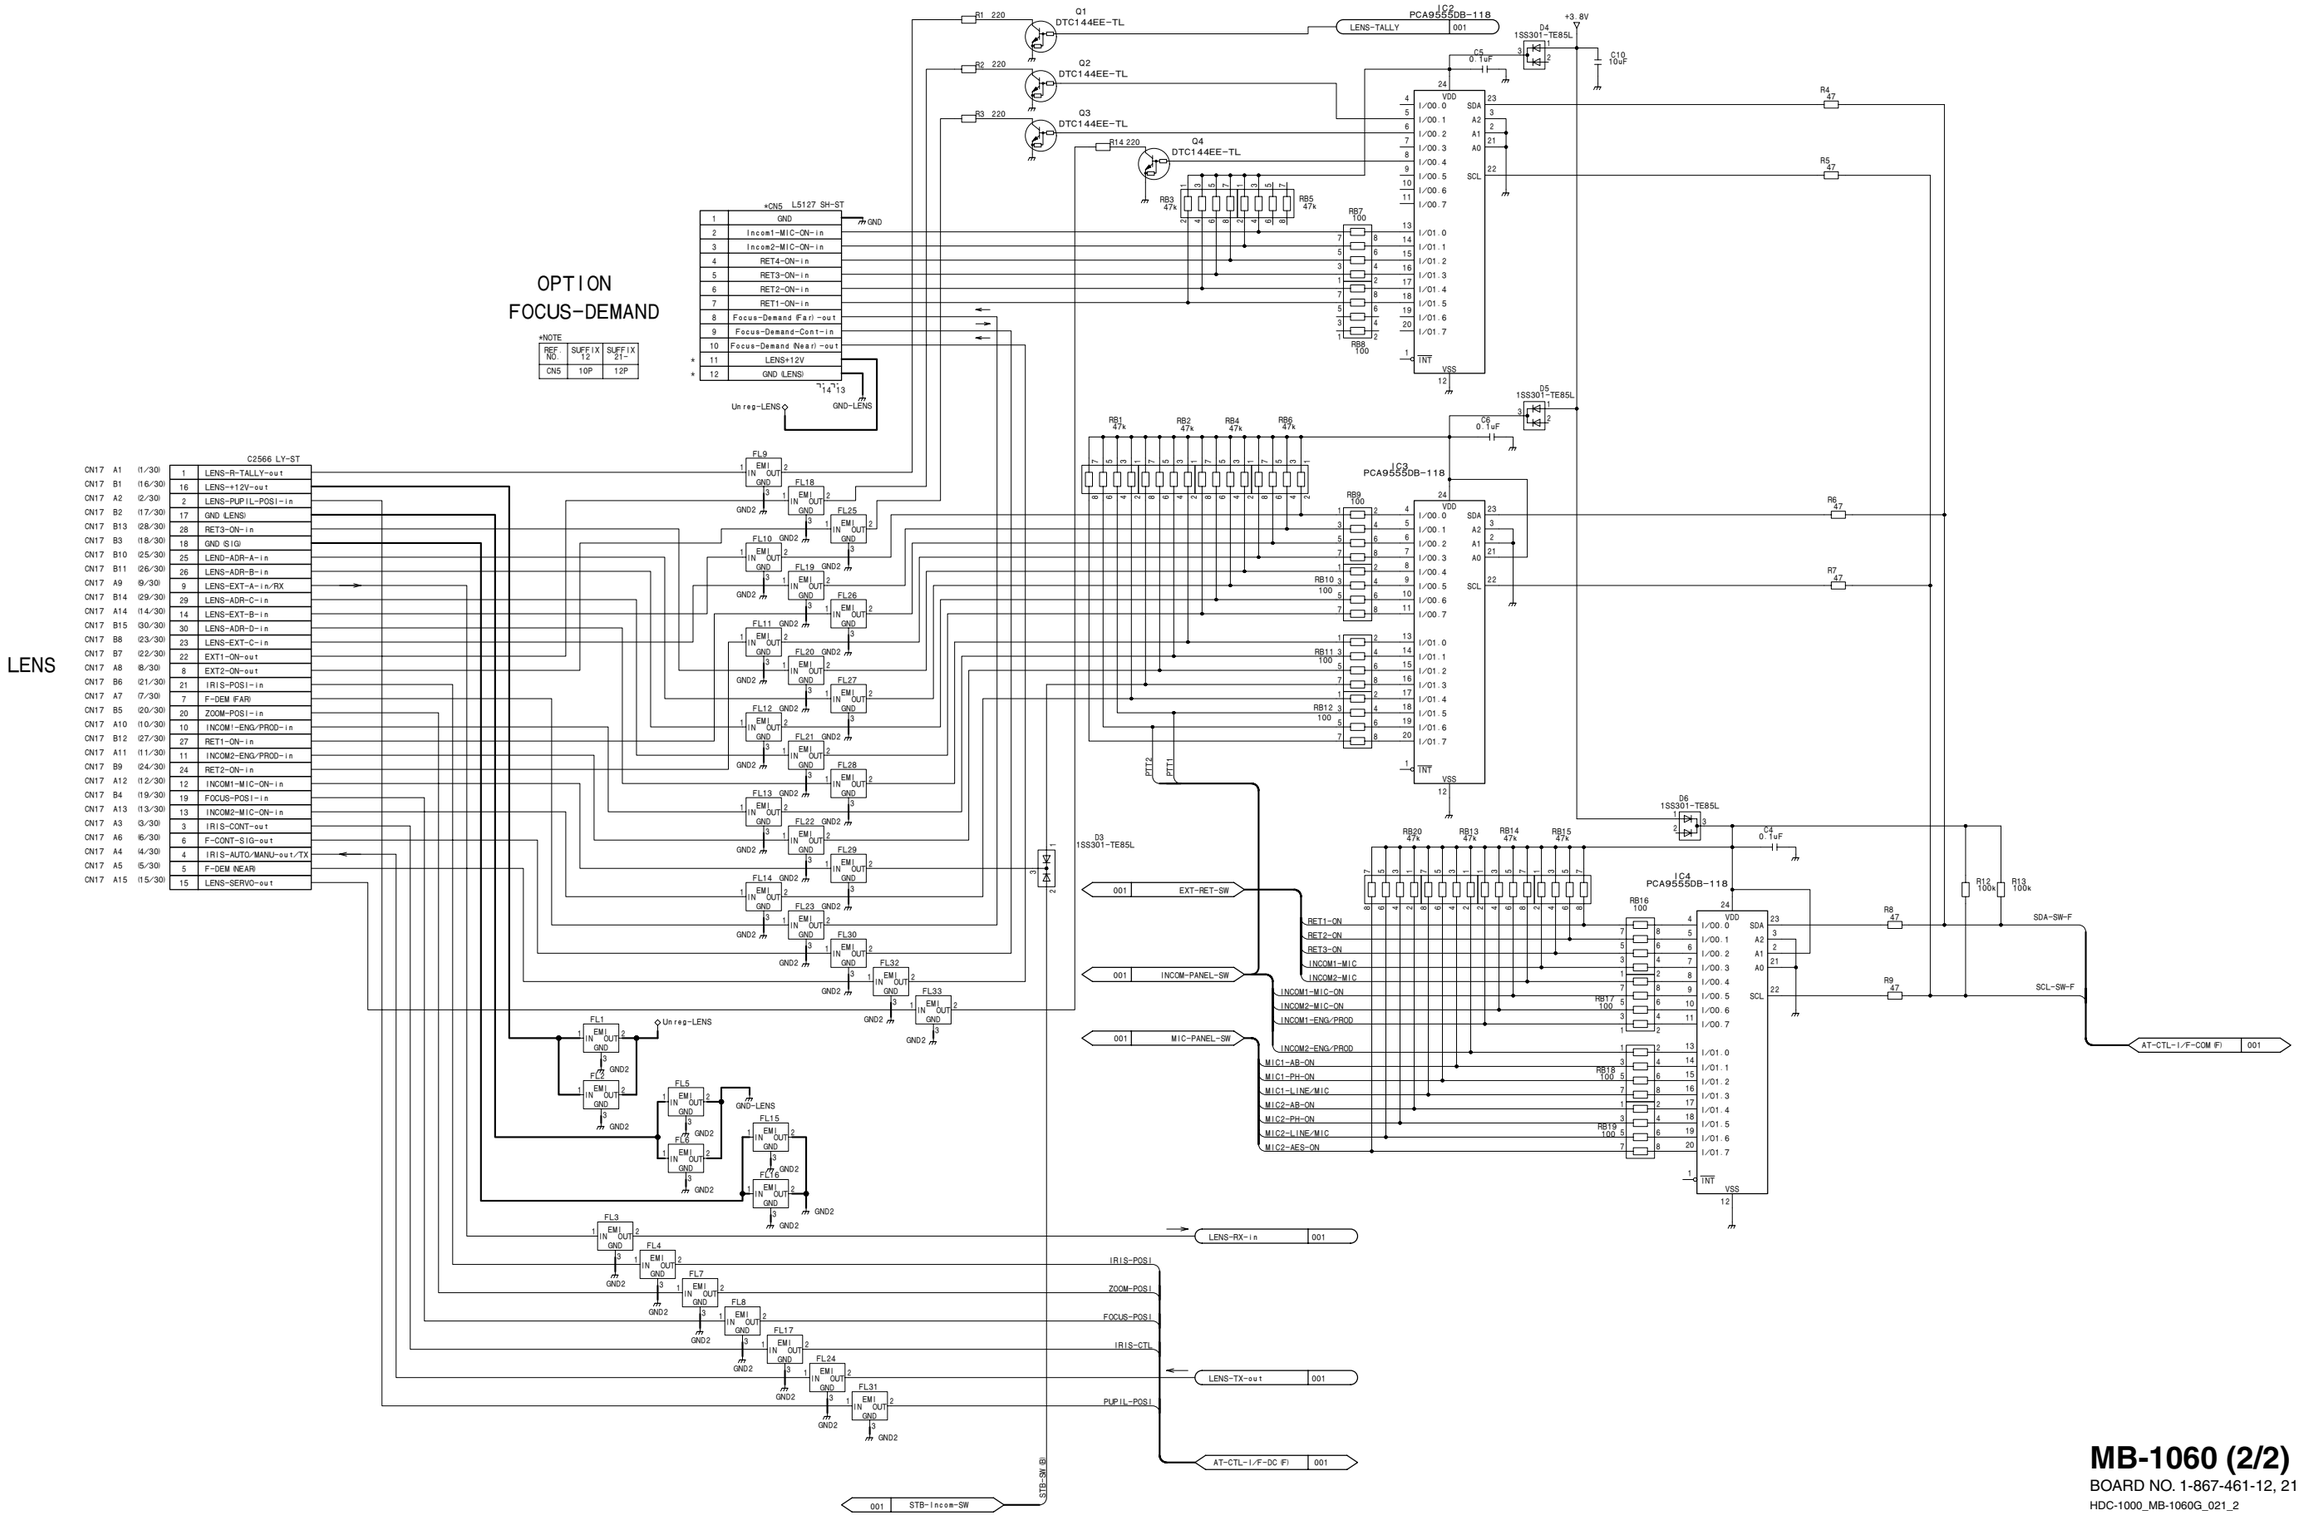

MB-1060 (2/2)
BOARD NO. 1-867-461-12, 21
HDC-1000_MB-1060G_021_2

MX-109 (1/2)
SUFFIX: -12

MX-109 (1/2)
SUFFIX: -12

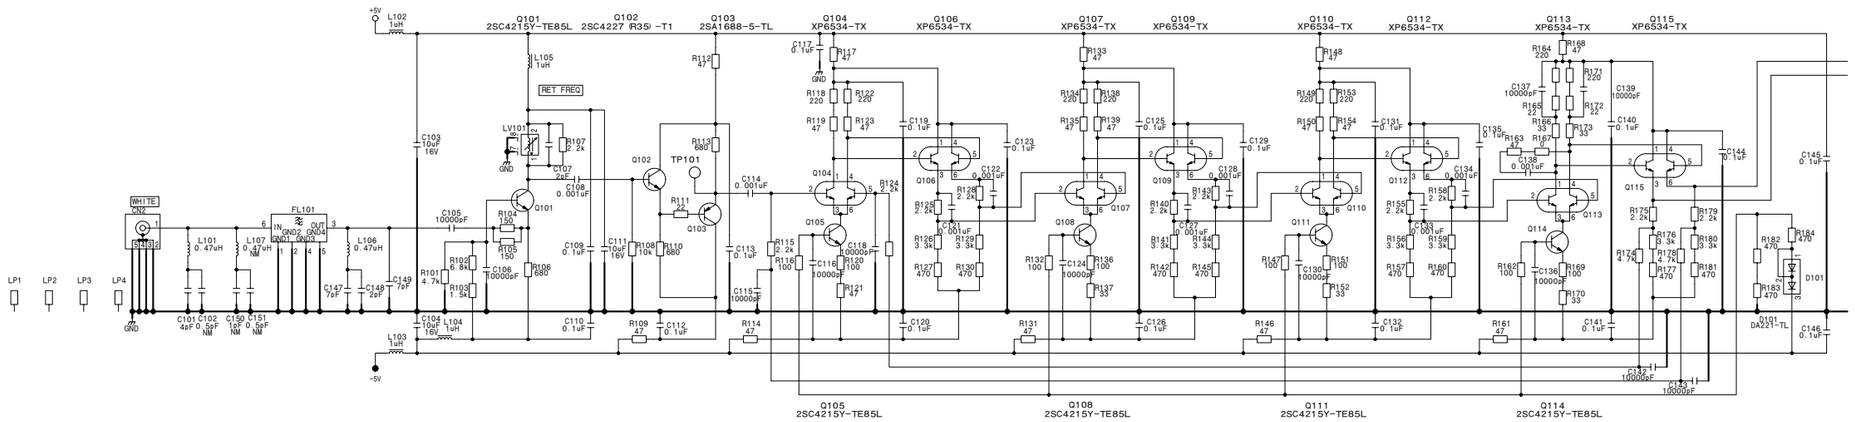


4-78

MX-109 (1/2)

SUFFIX: -12

MX-109 (1/2)

SUFFIX: -12

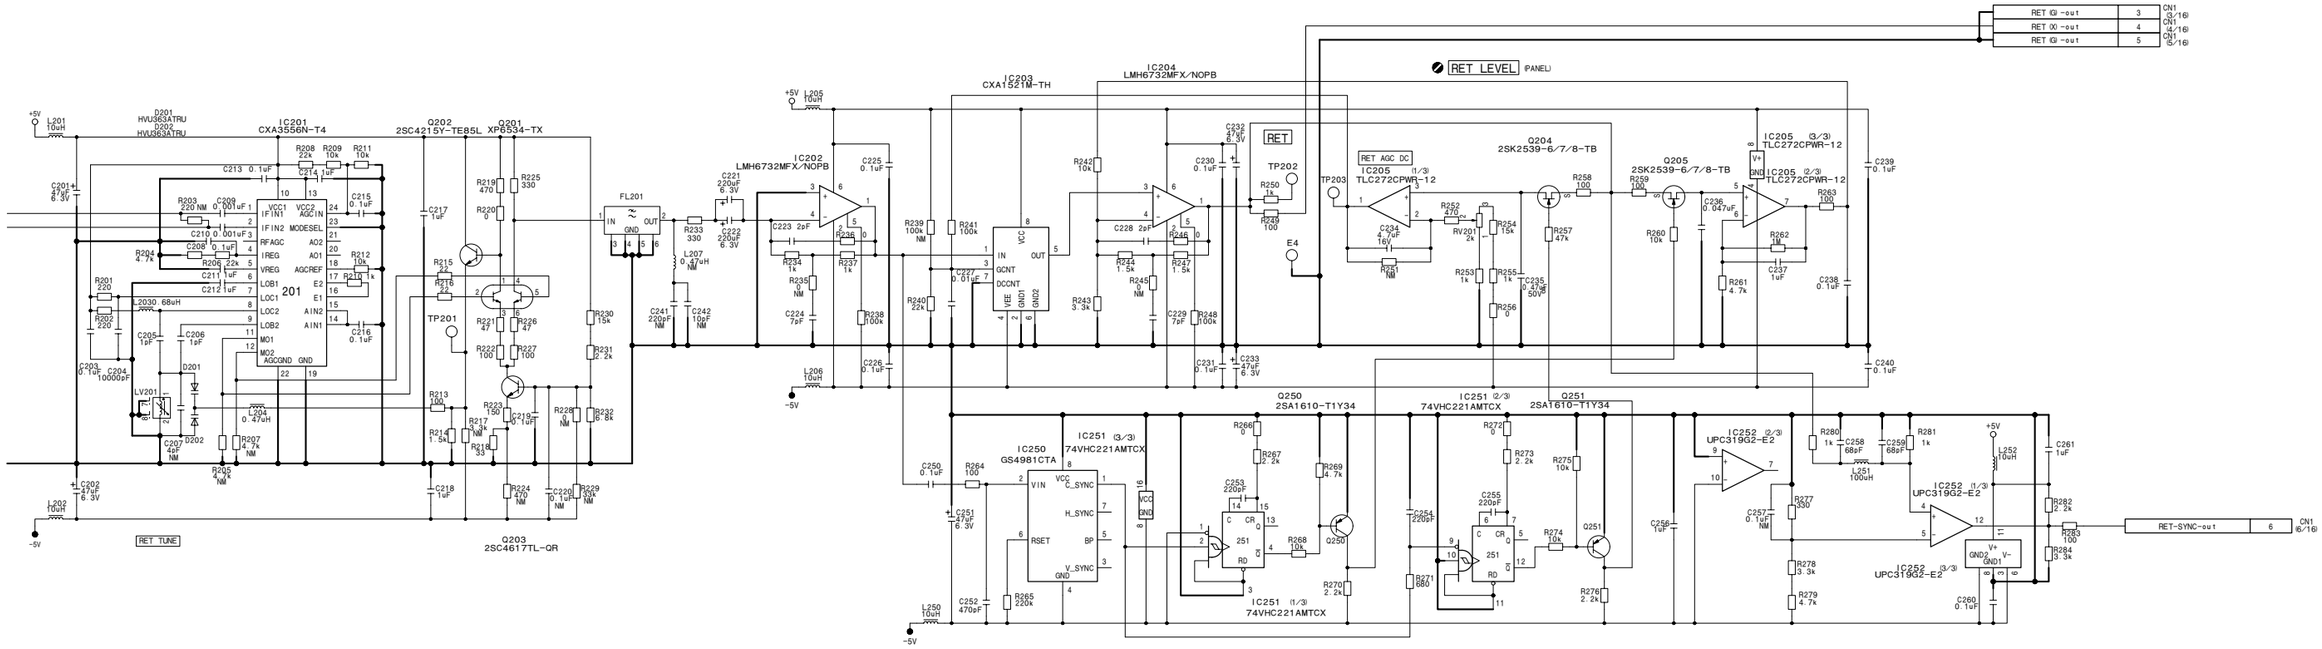


MX-109 (1/2)

BOARD NO. 1-868-409-12

HDC1550_MX-109_012_1


MX-109 (2/2)
SUFFIX: -12

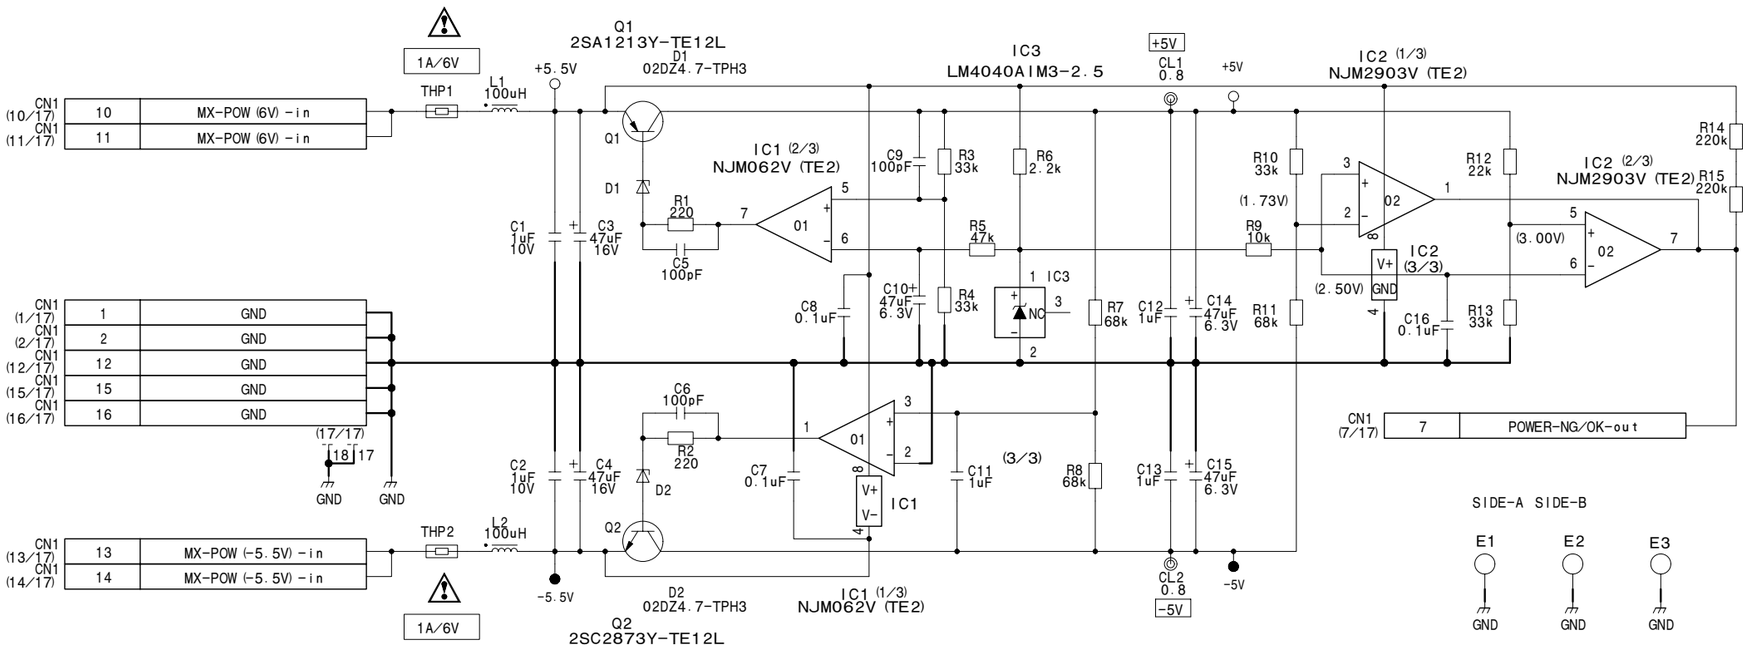


MX-109 (2/2)
BOARD NO. 1-868-409-12
HDC1550_MX-109_012_2

PA-317 (1/4)
SUFFIX: -14


PA-317 (1/4)
SUFFIX: -14

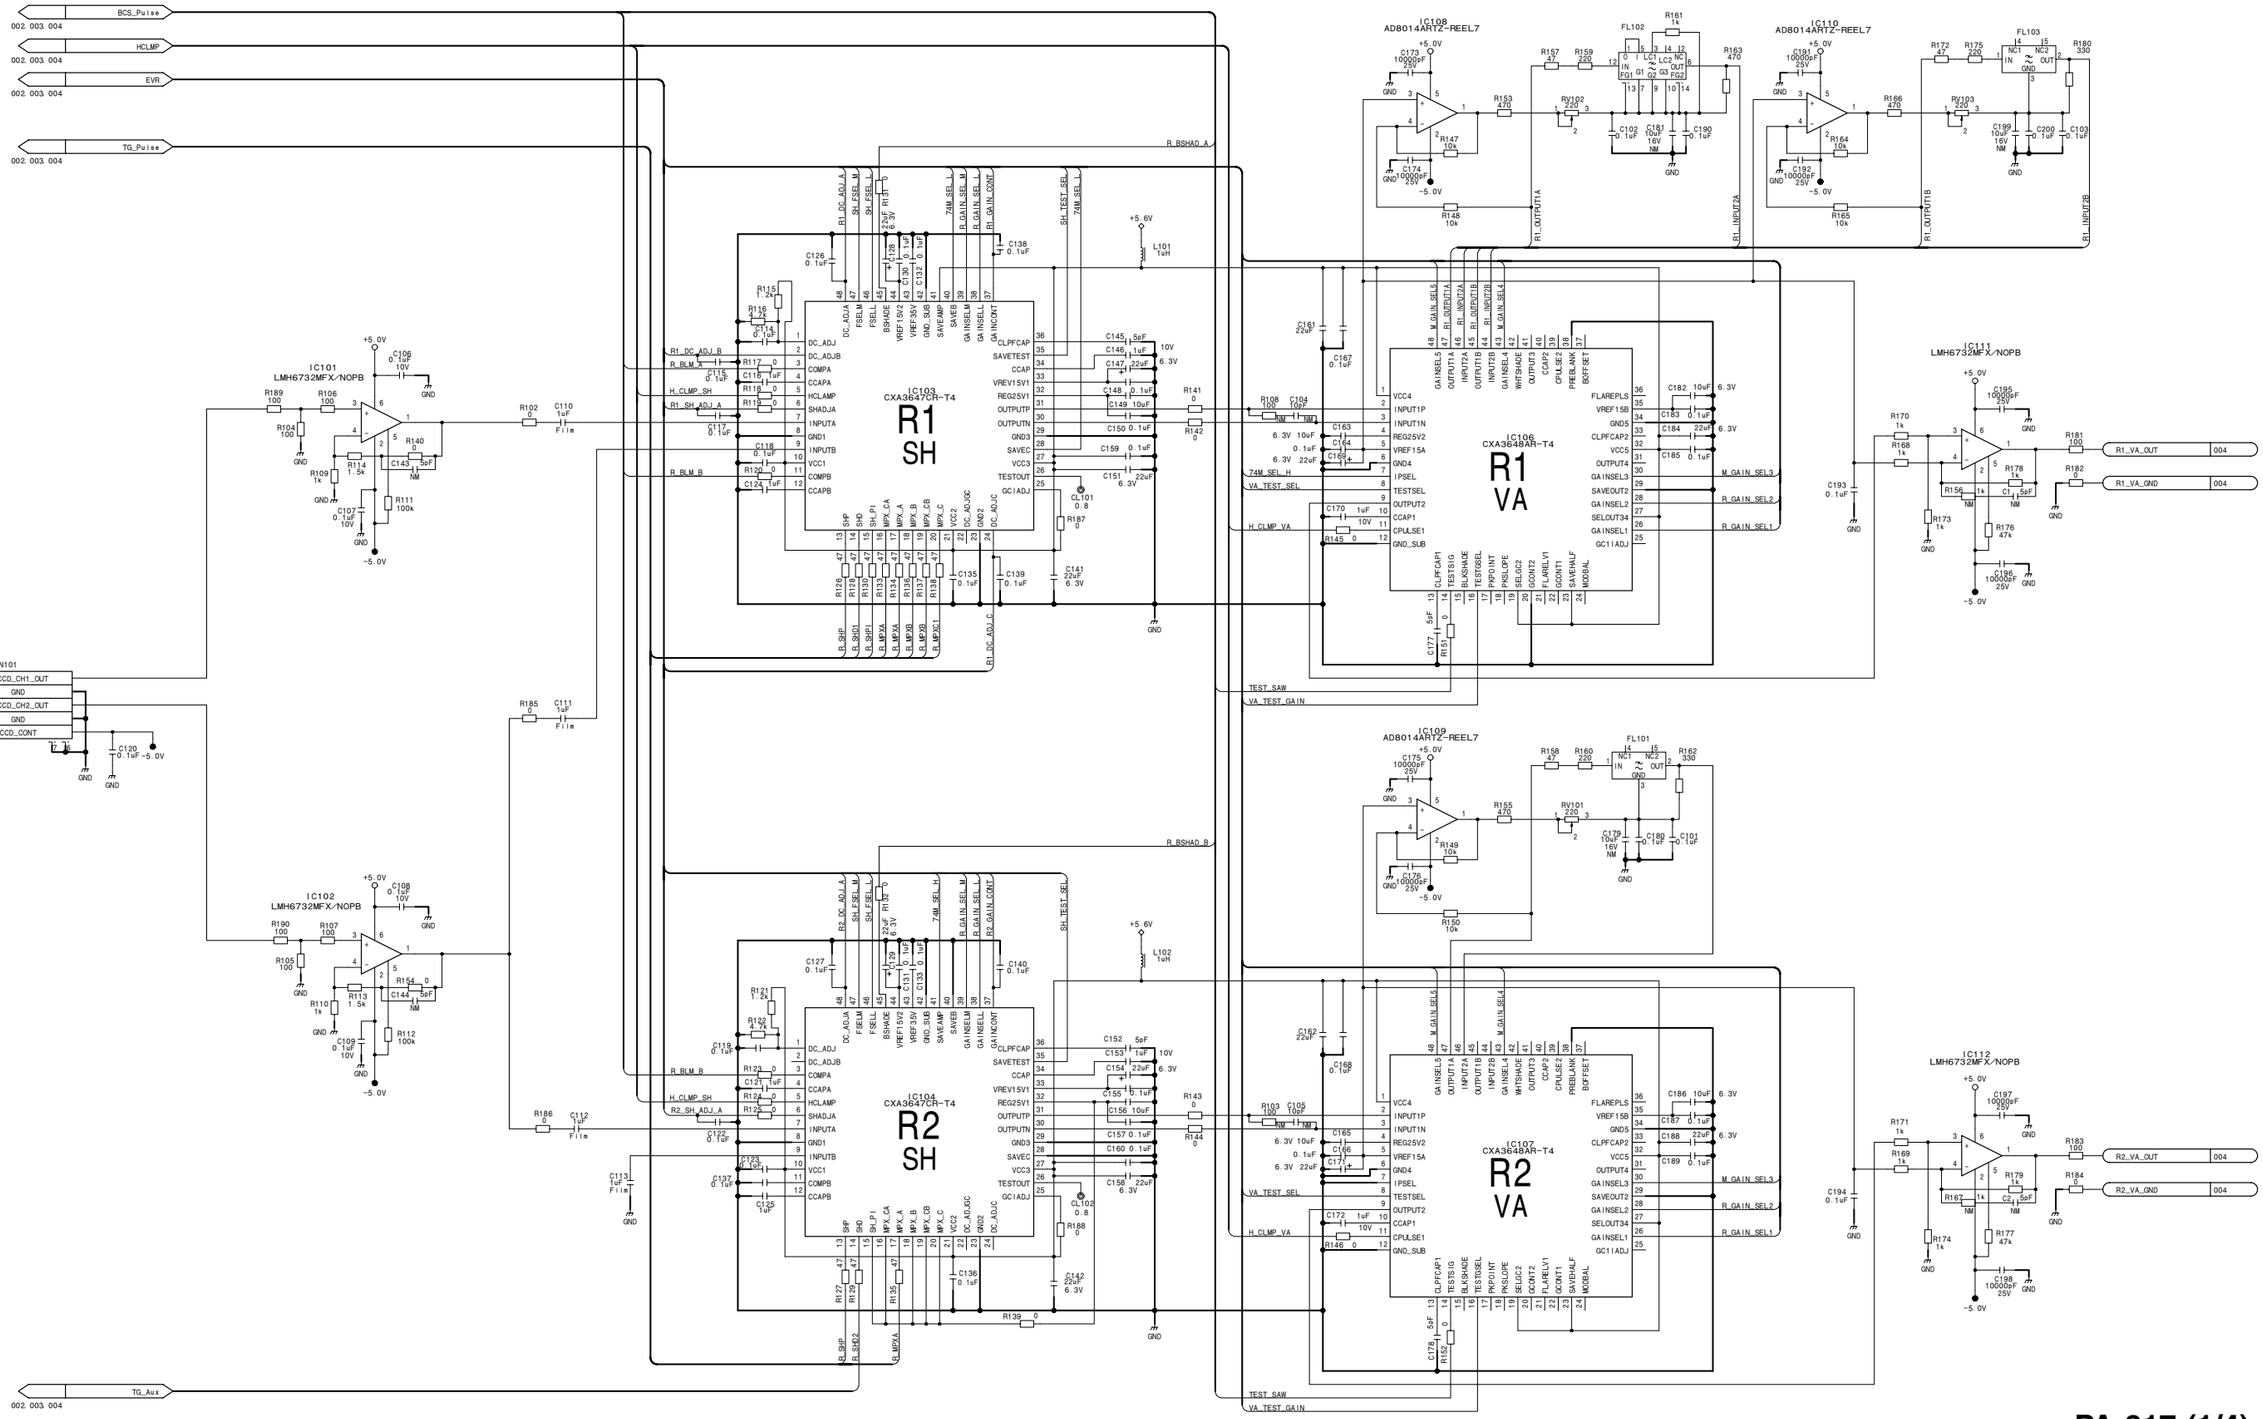


PA-317 (1/4)
BOARD NO. 1-865-971-14
HDC-1500_PA-317_015_1

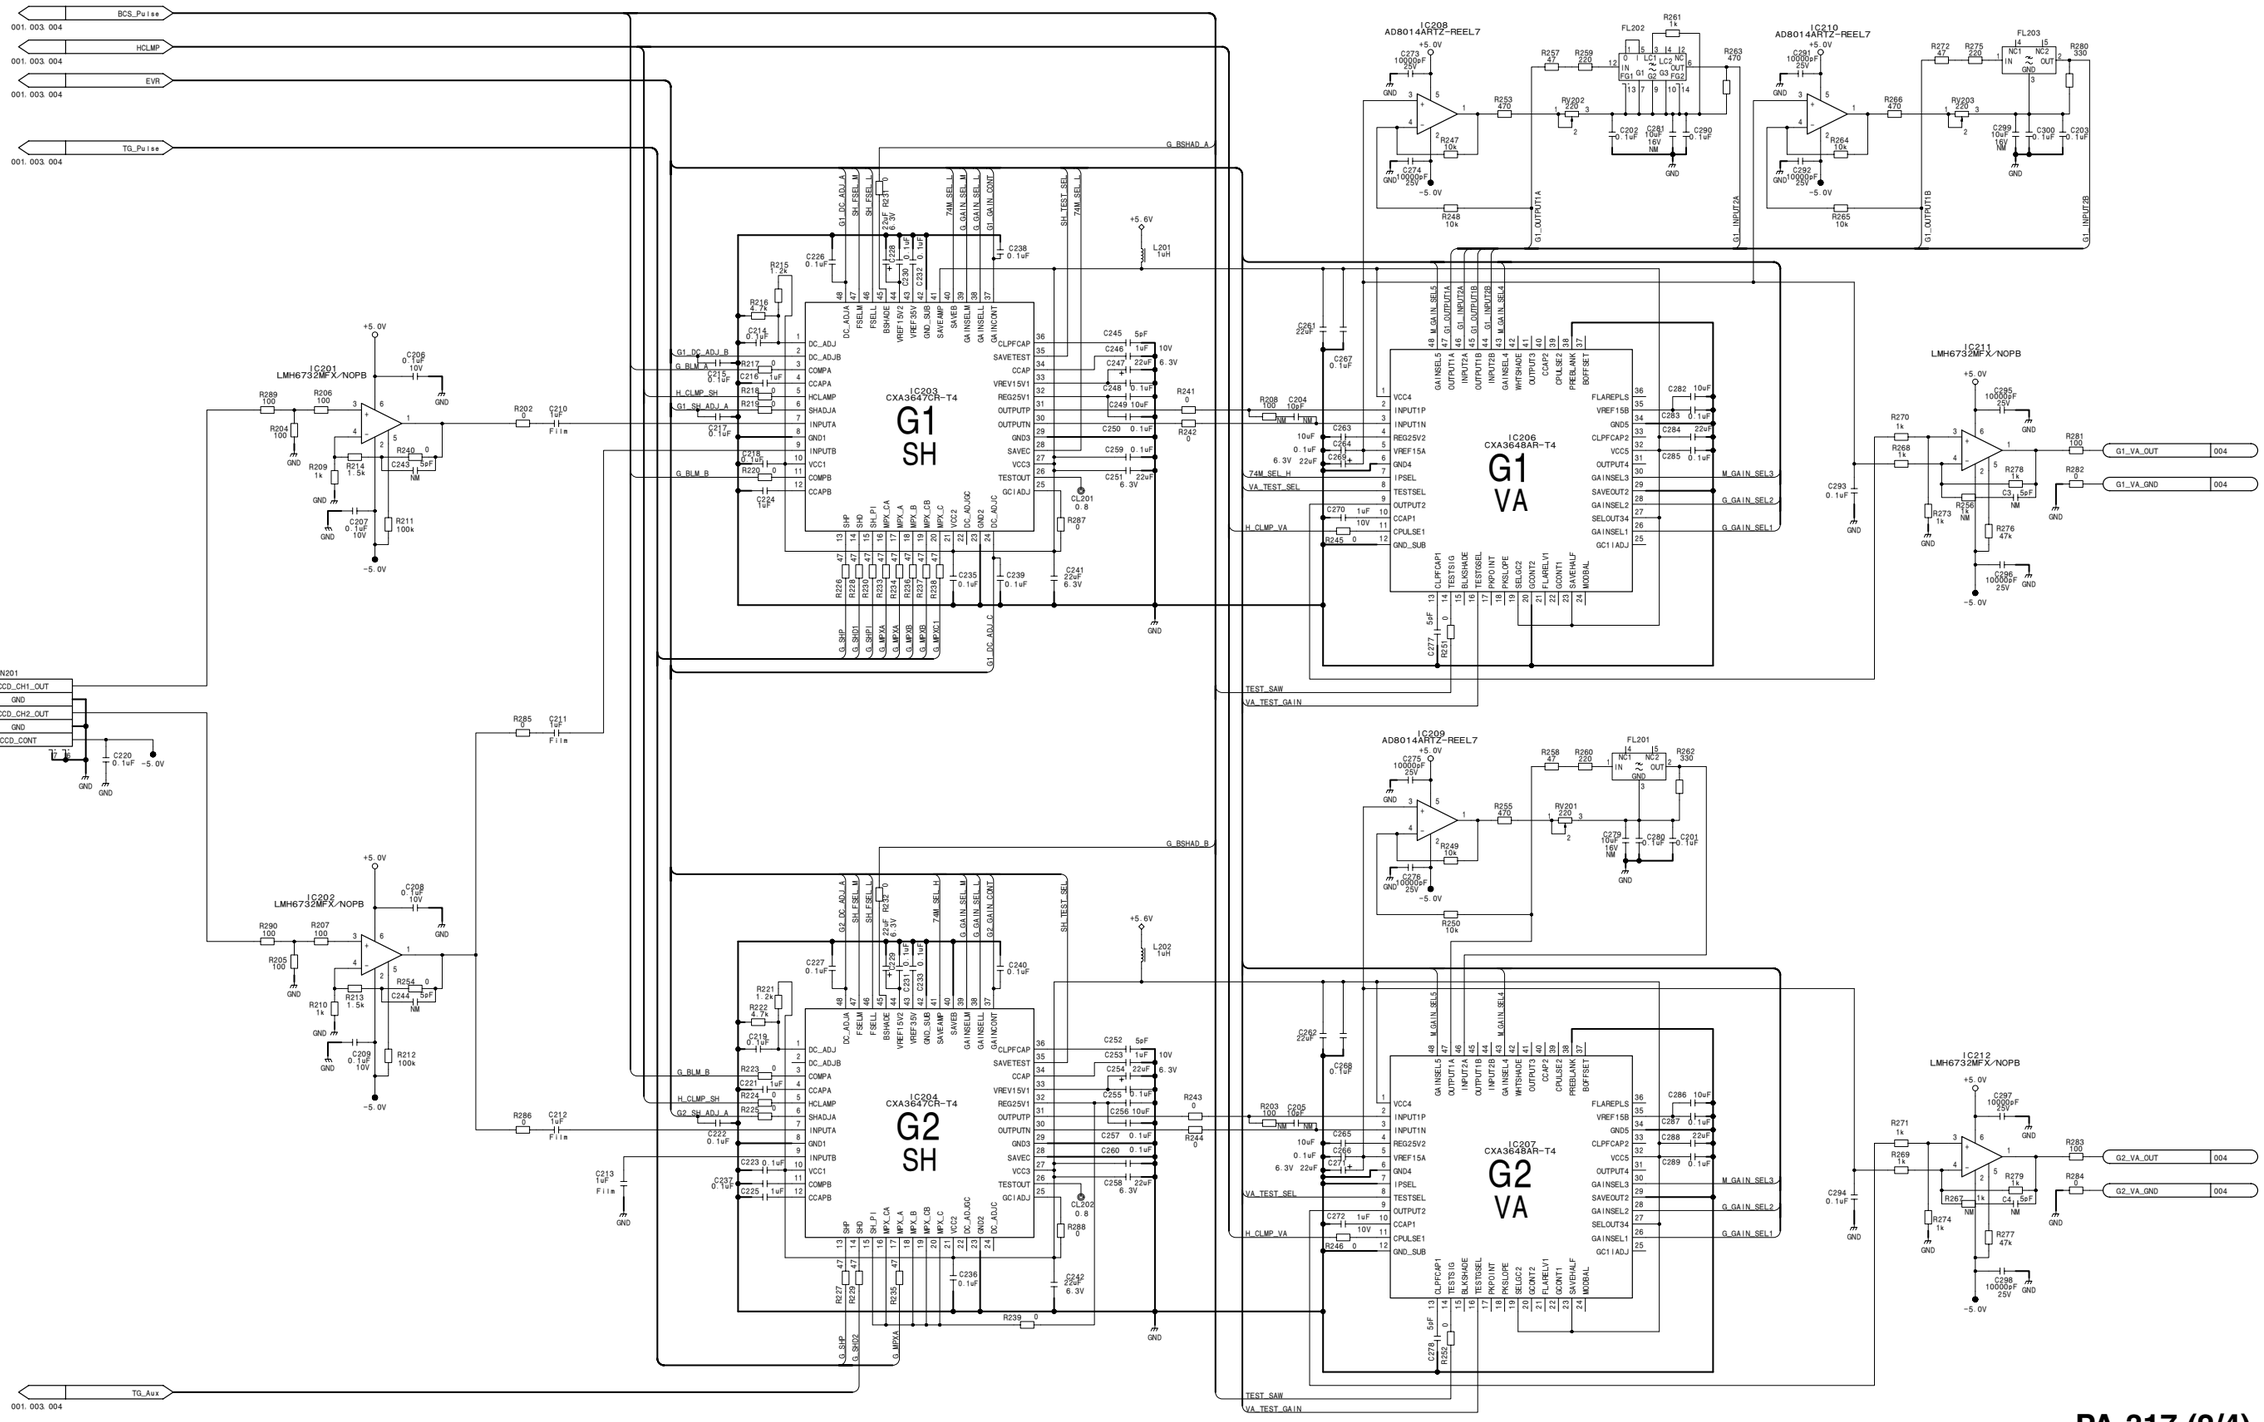

PA-317 (2/4)
BOARD NO. 1-865-971-14
HDC-1500_PA-317_015_2

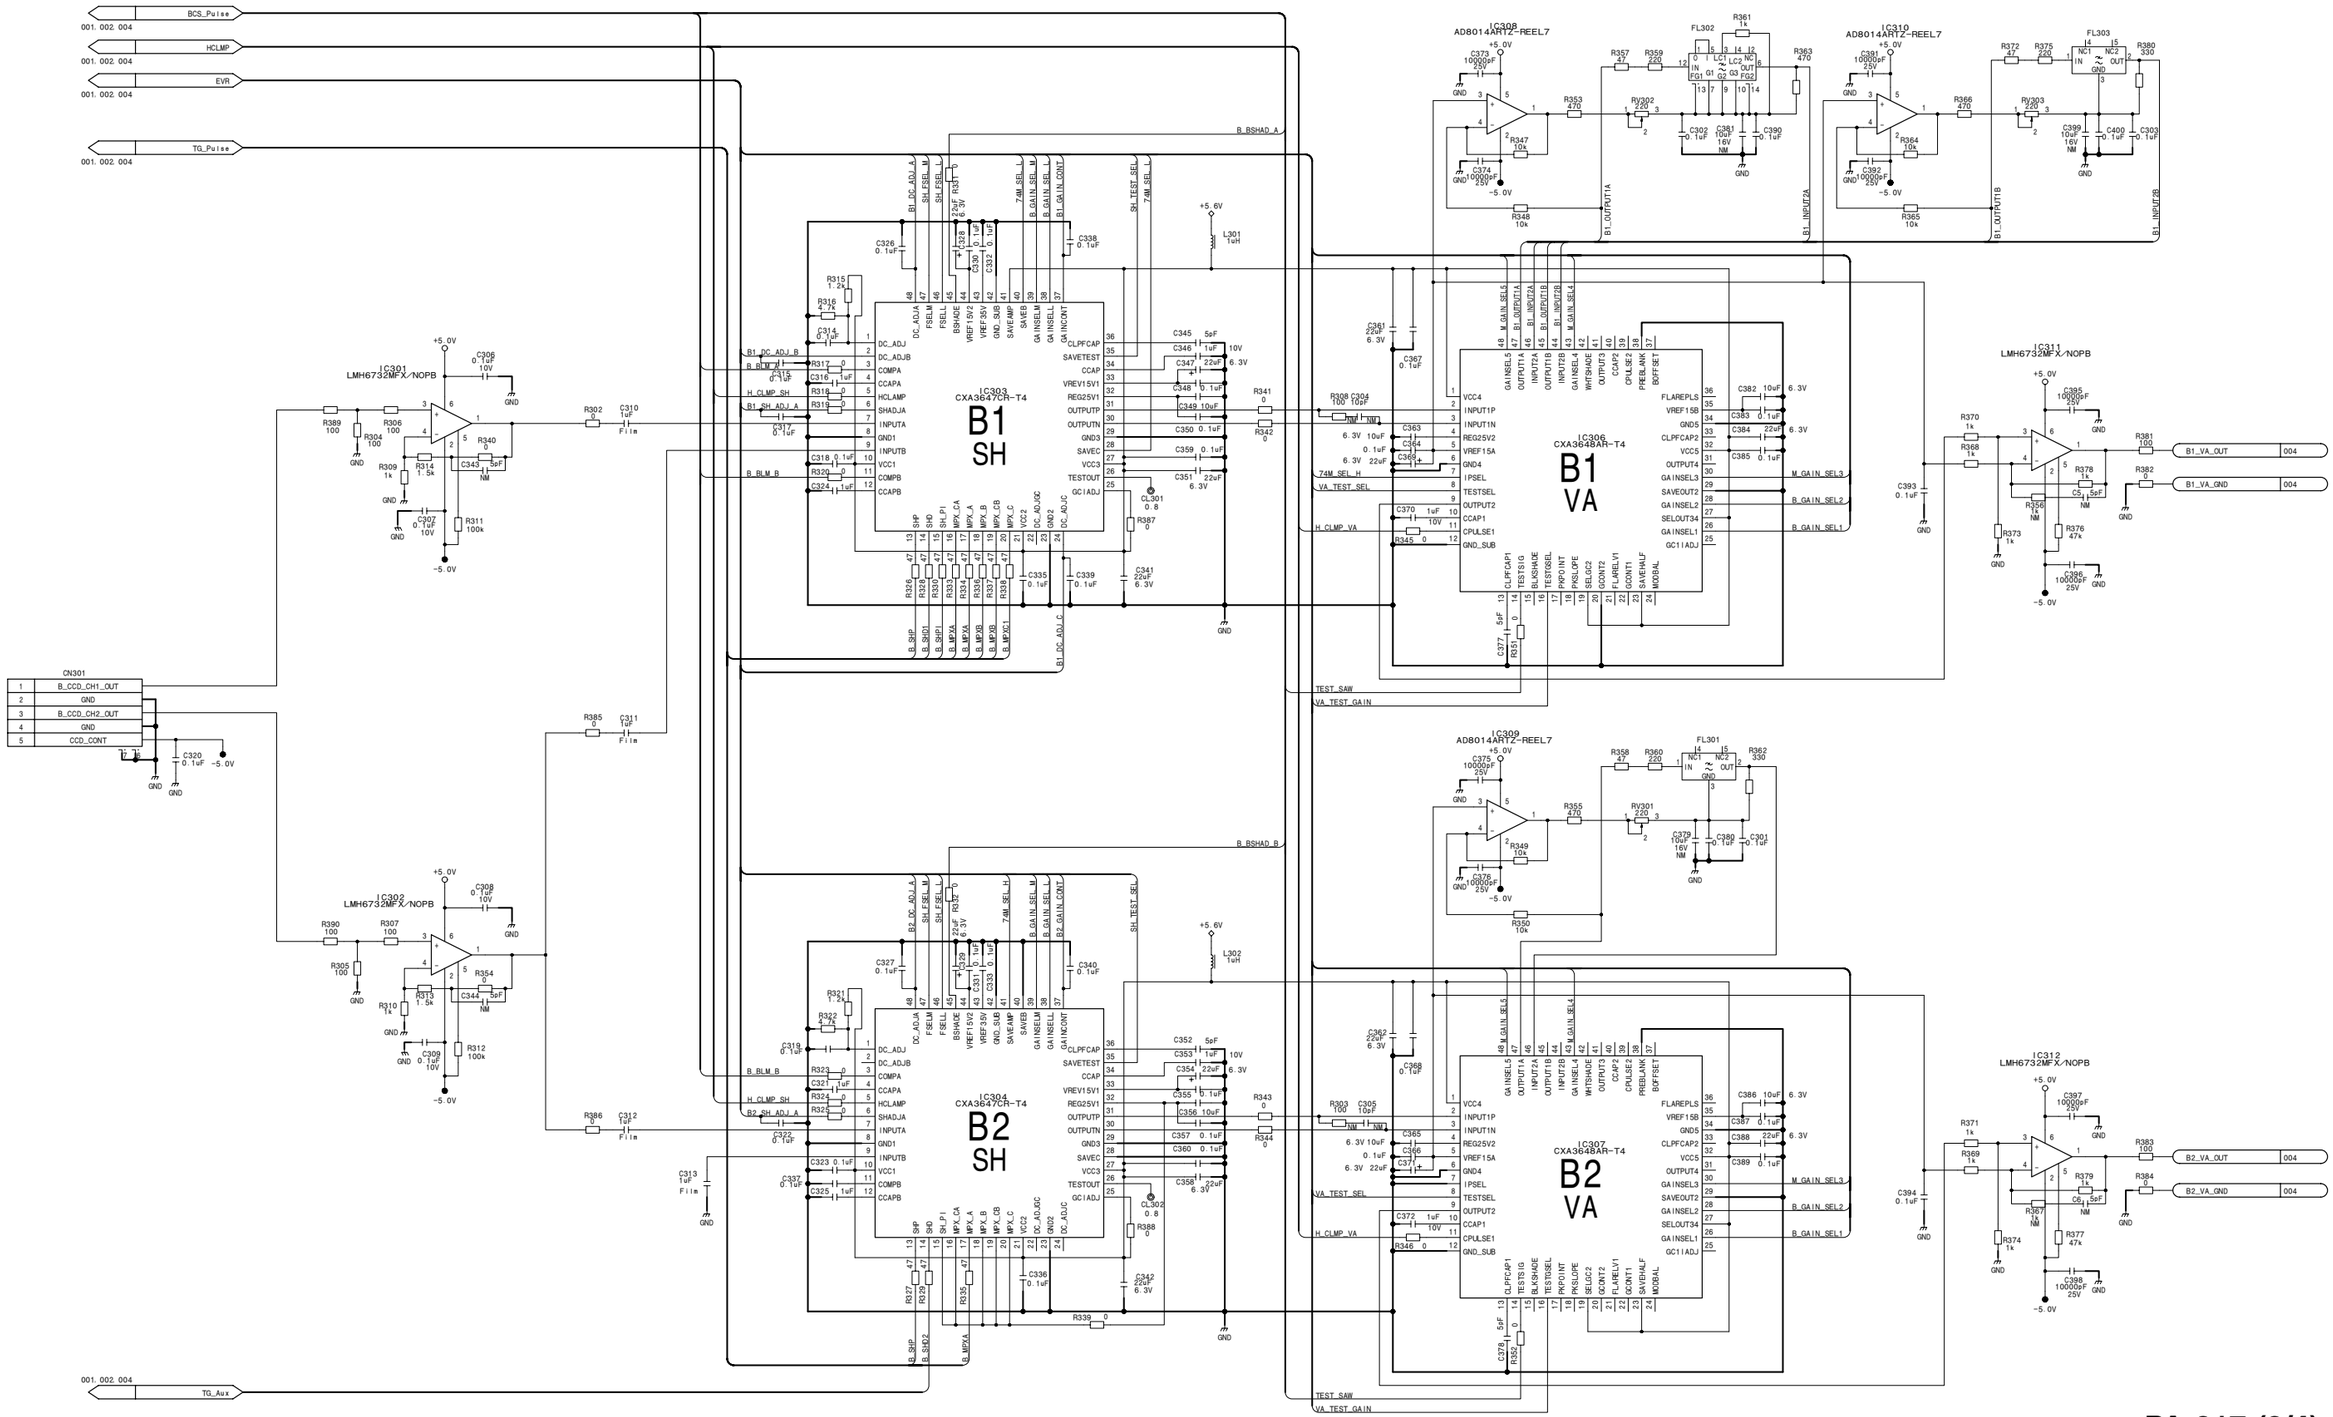


PA-317 (3/4)
BOARD NO. 1-865-971-14
HDC-1500_PA-317_015_3

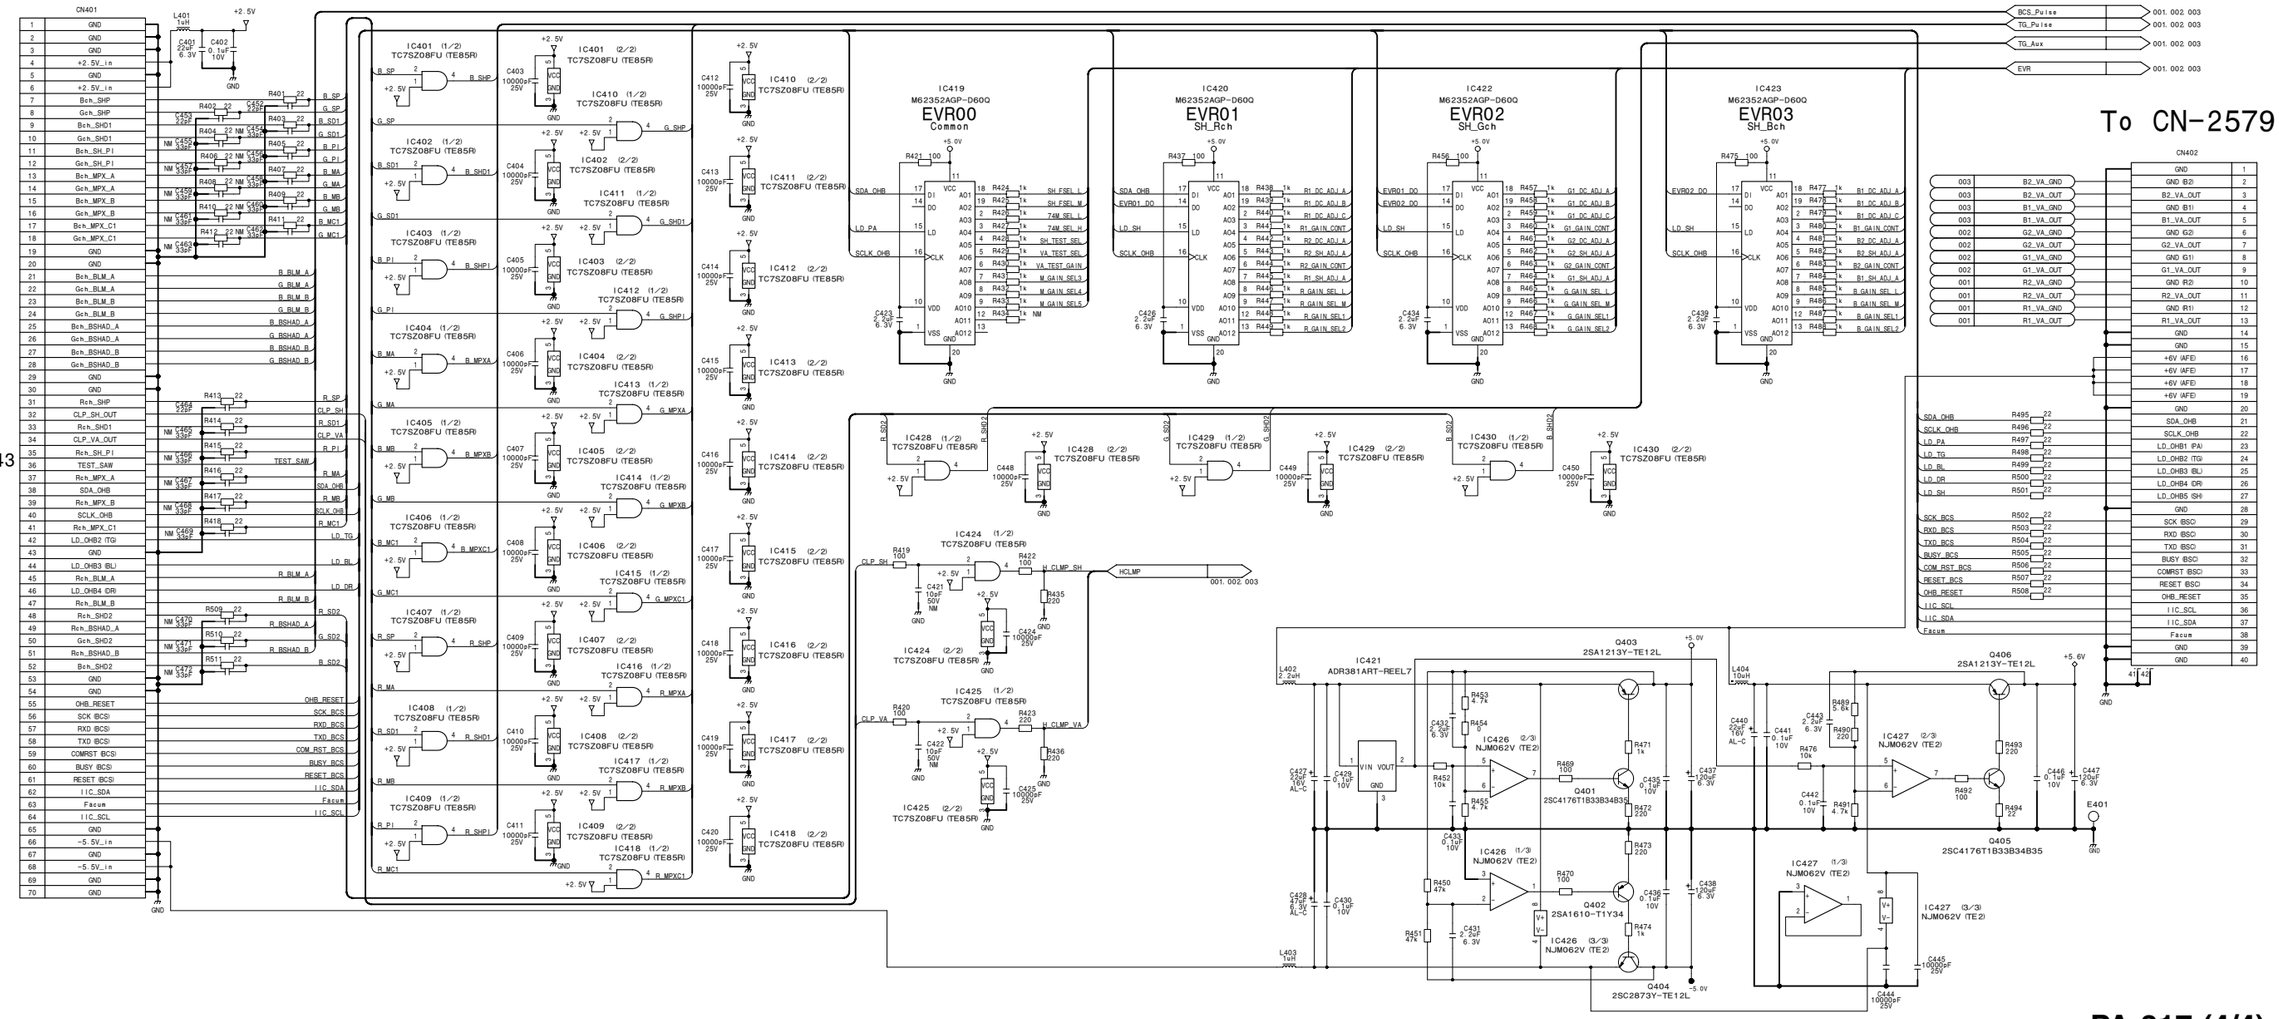

PA-317 (4/4)
BOARD NO. 1-865-971-14
HDC-1500_PA-317_015_4

PA-317 (1/4)
SUFFIX: -21


PA-317 (1/4)
SUFFIX: -21

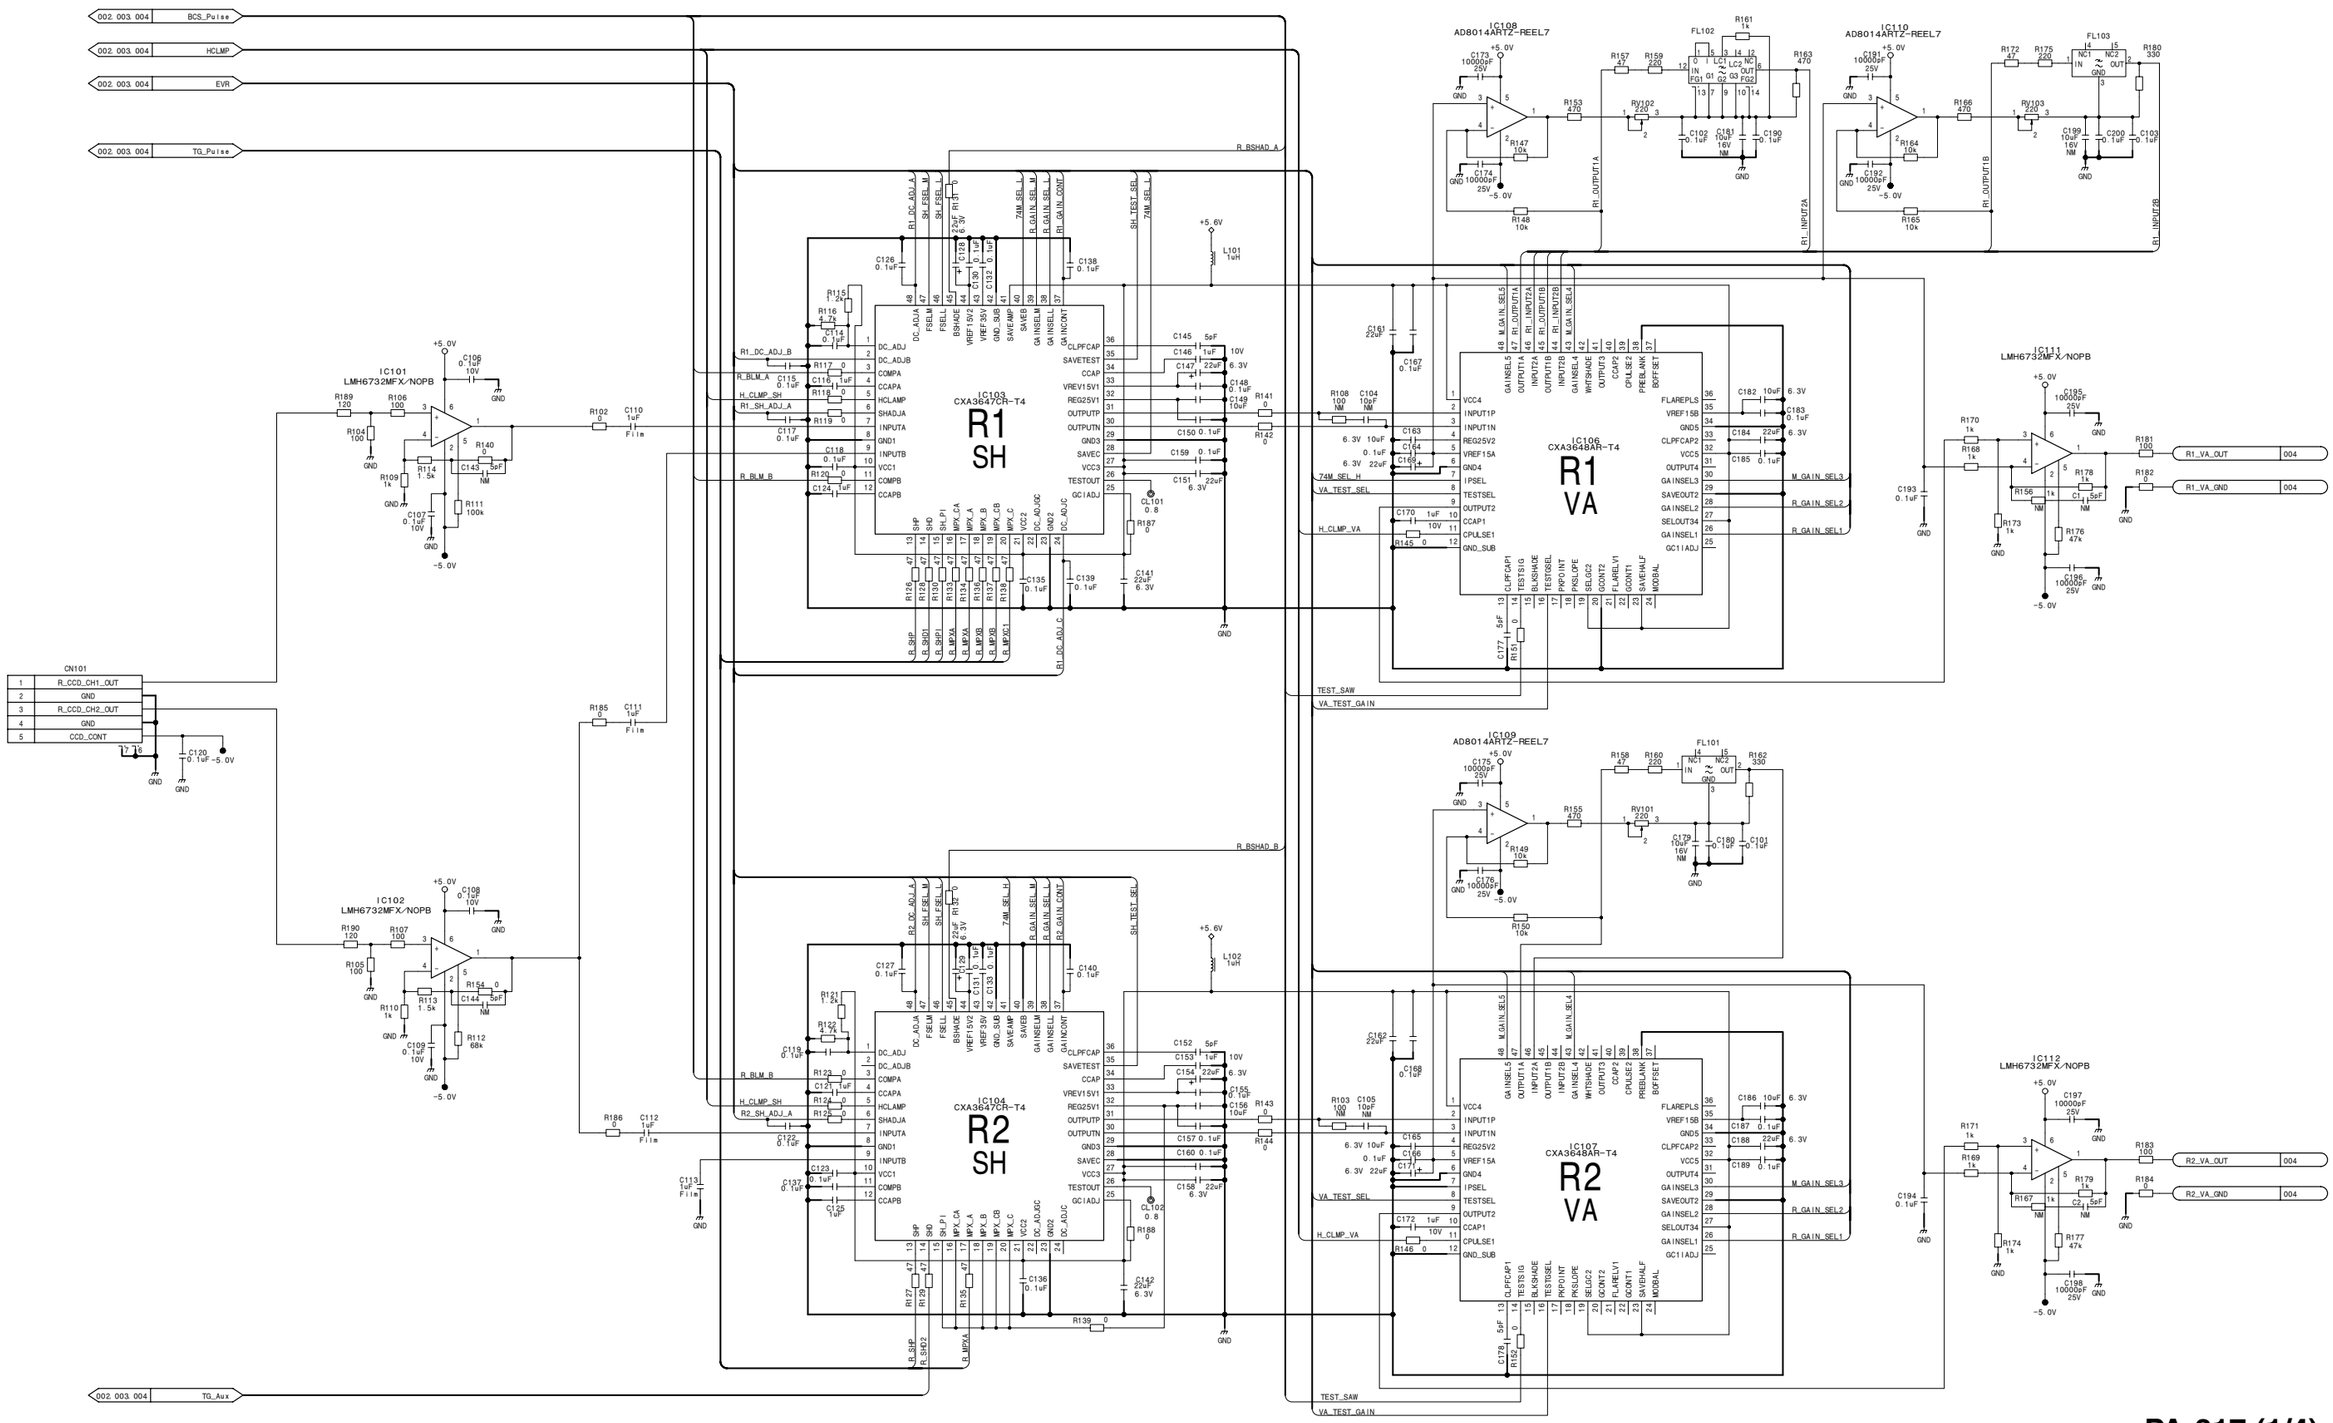


PA-317 (1/4)
BOARD NO. 1-865-971-21
HDC-1500_PA-317G_021_1

PA-317 (2/4)
SUFFIX: -21

PA-317 (2/4)
SUFFIX: -21

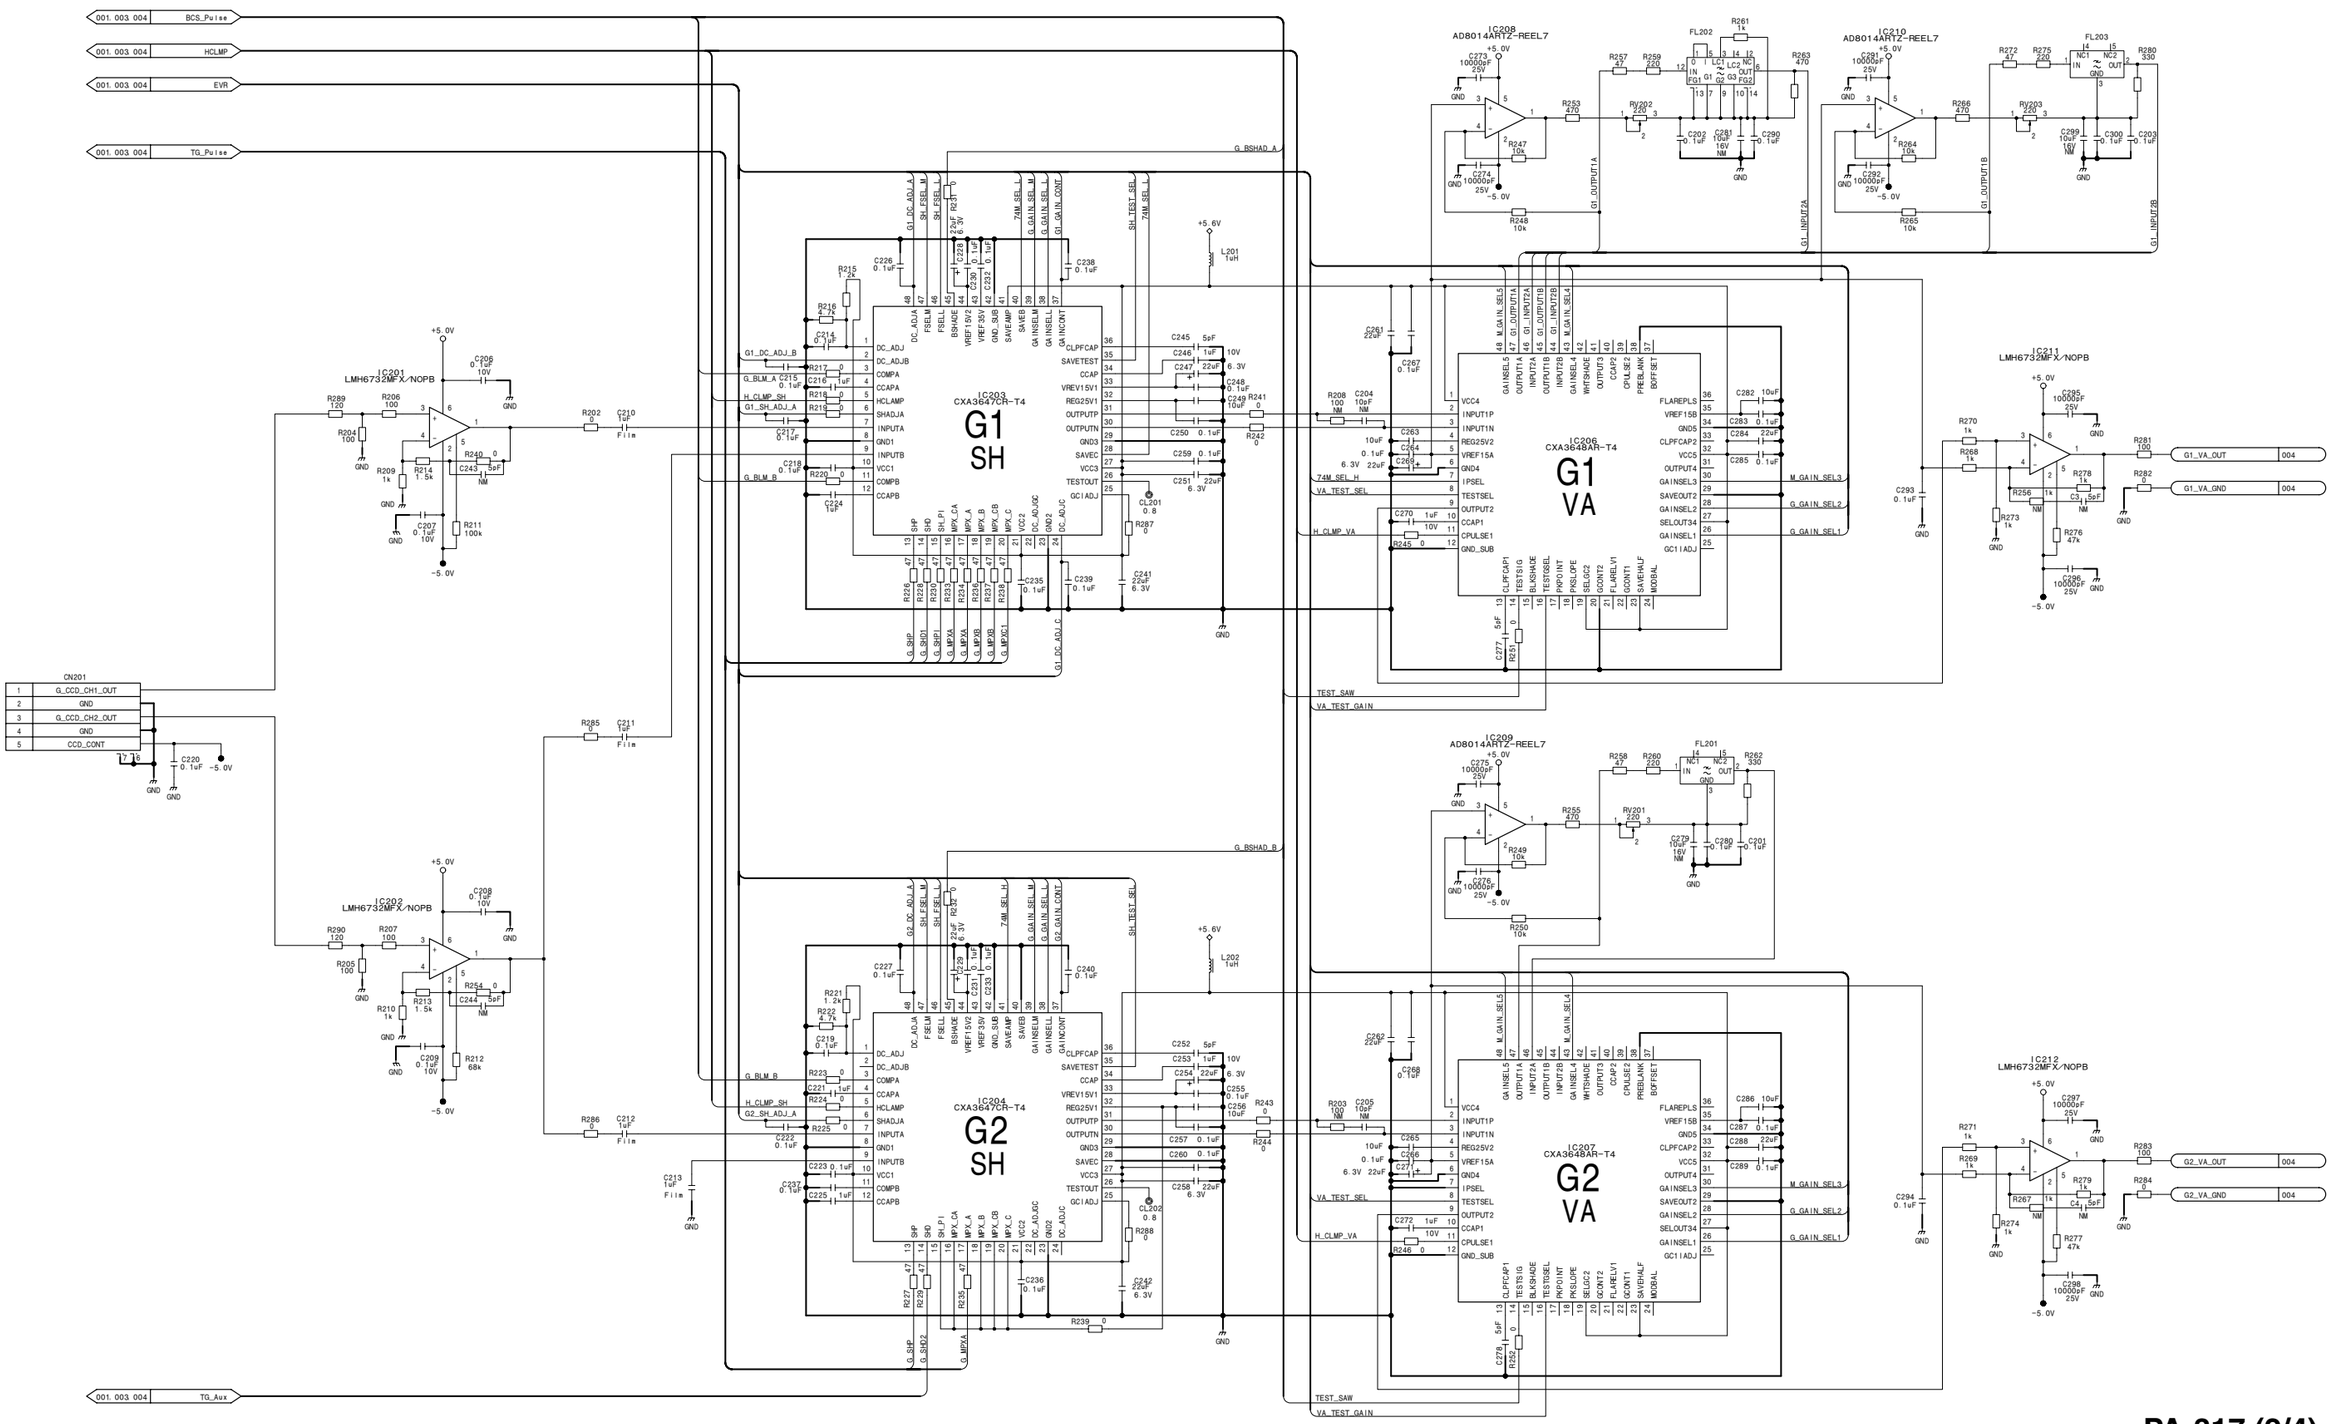


PA-317 (2/4)
BOARD NO. 1-865-971-21
HDC-1500_PA-317G_021_2

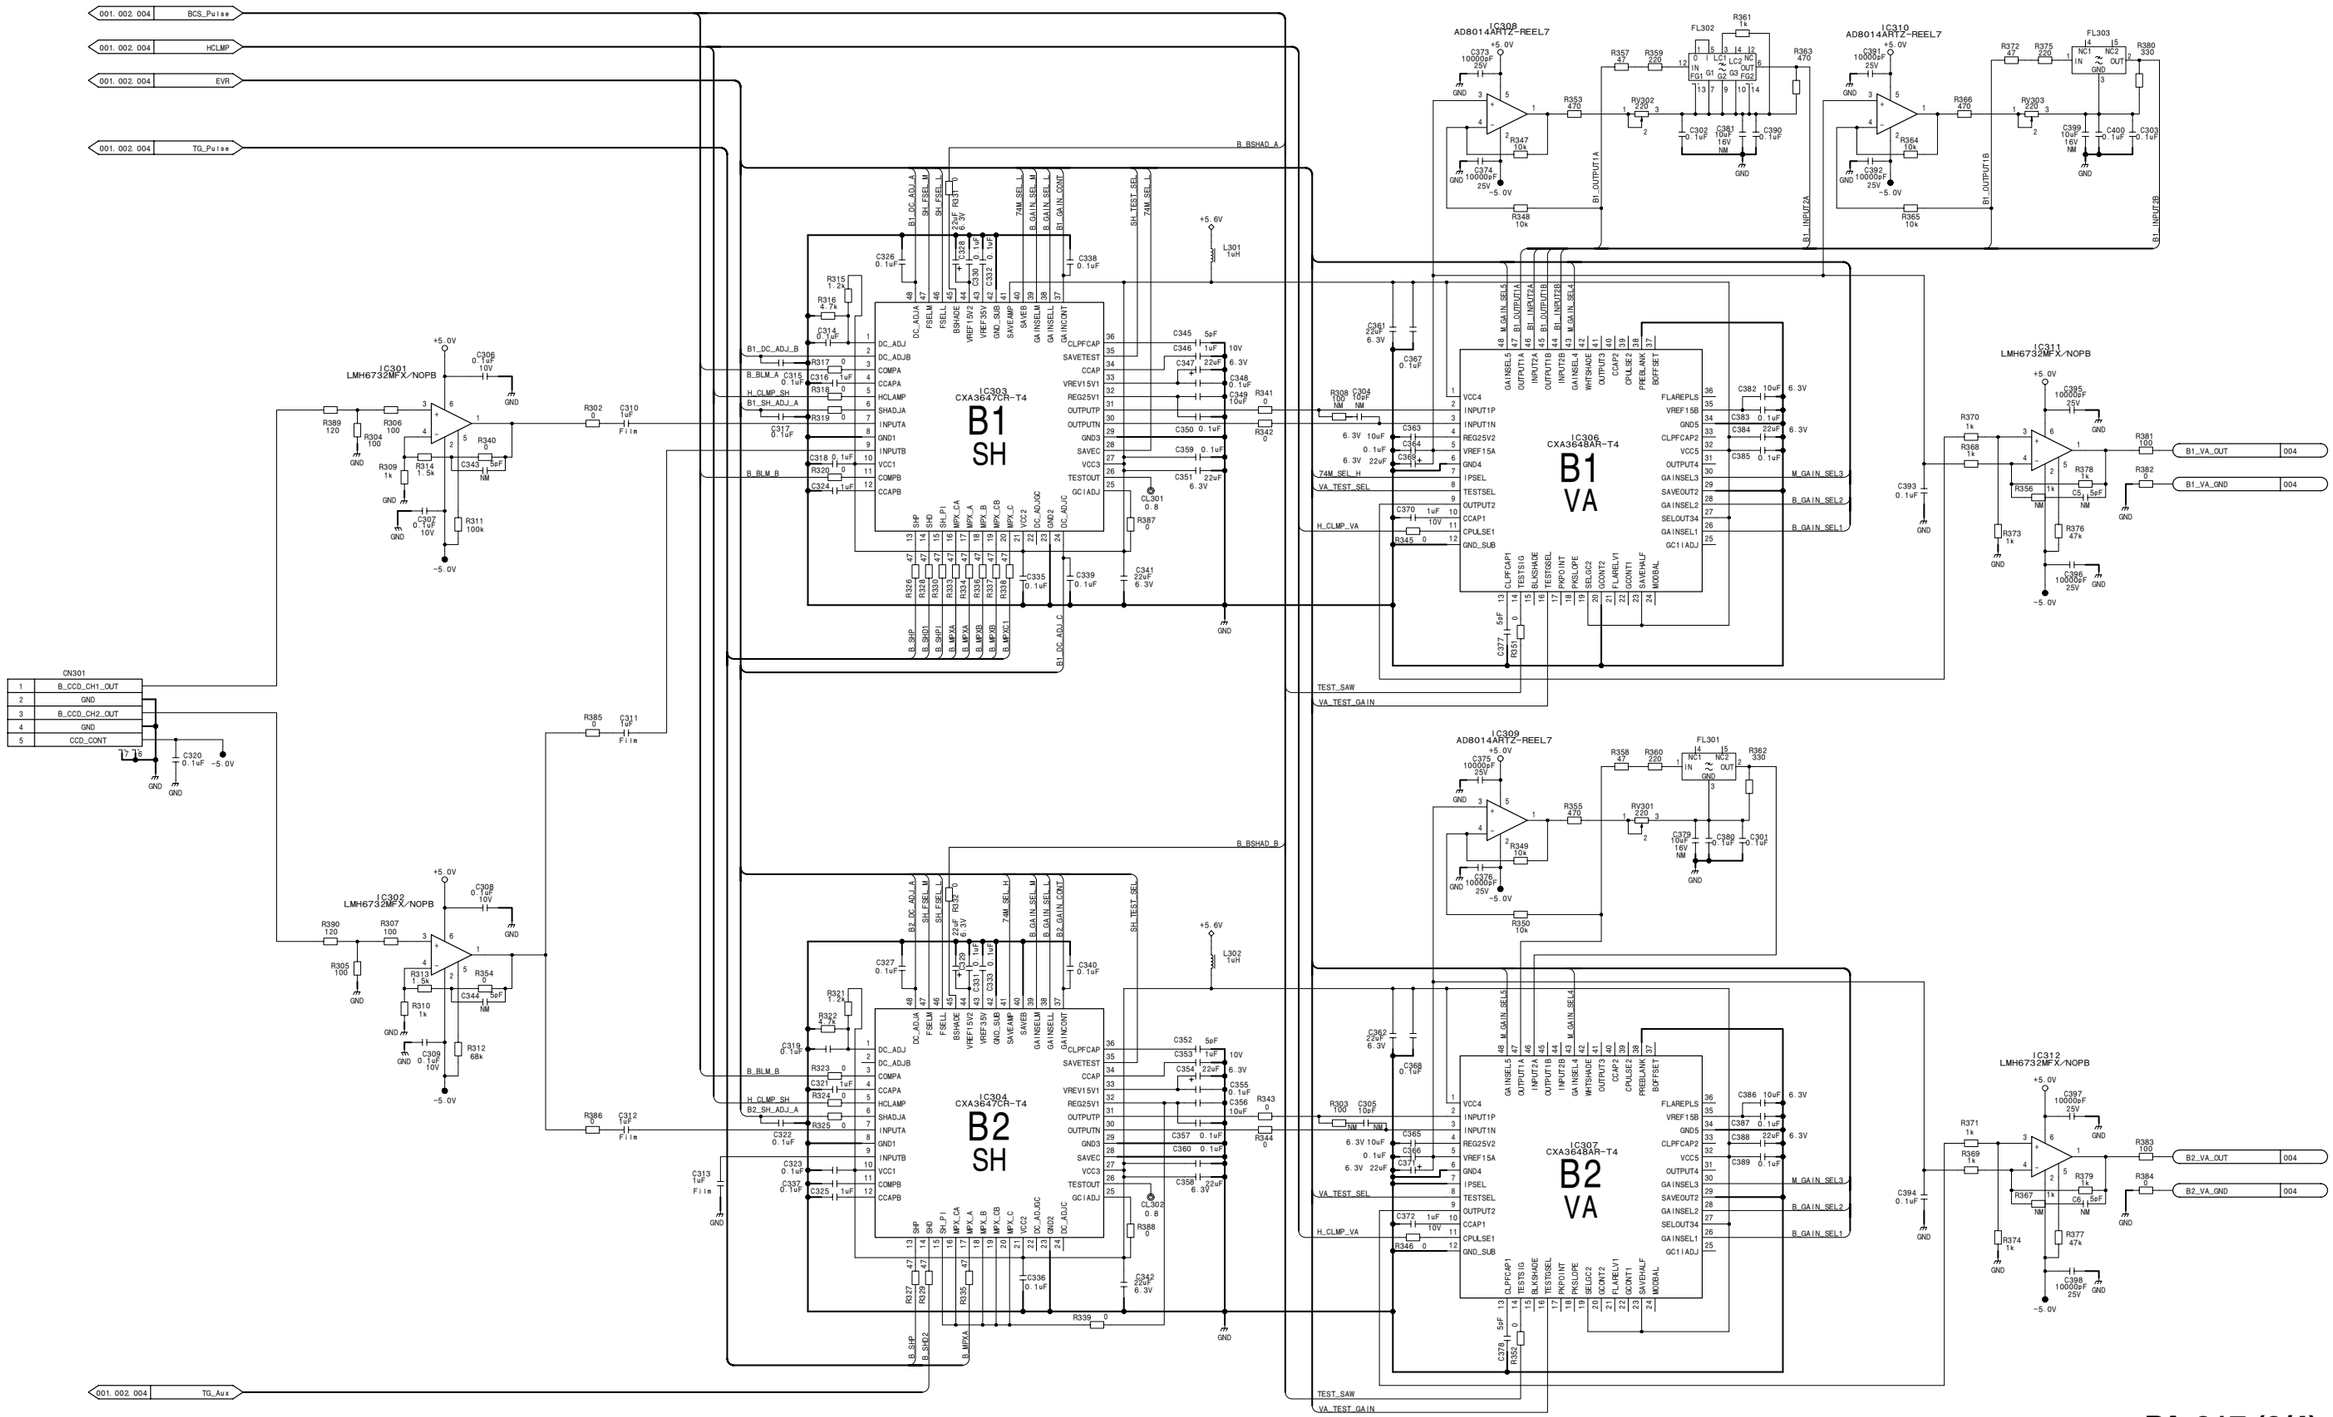

PA-317 (3/4)
BOARD NO. 1-865-971-21
HDC-1500_PA-317G_021_3

PA-317 (4/4)
SUFFIX: -21

PA-317 (4/4)
SUFFIX: -21

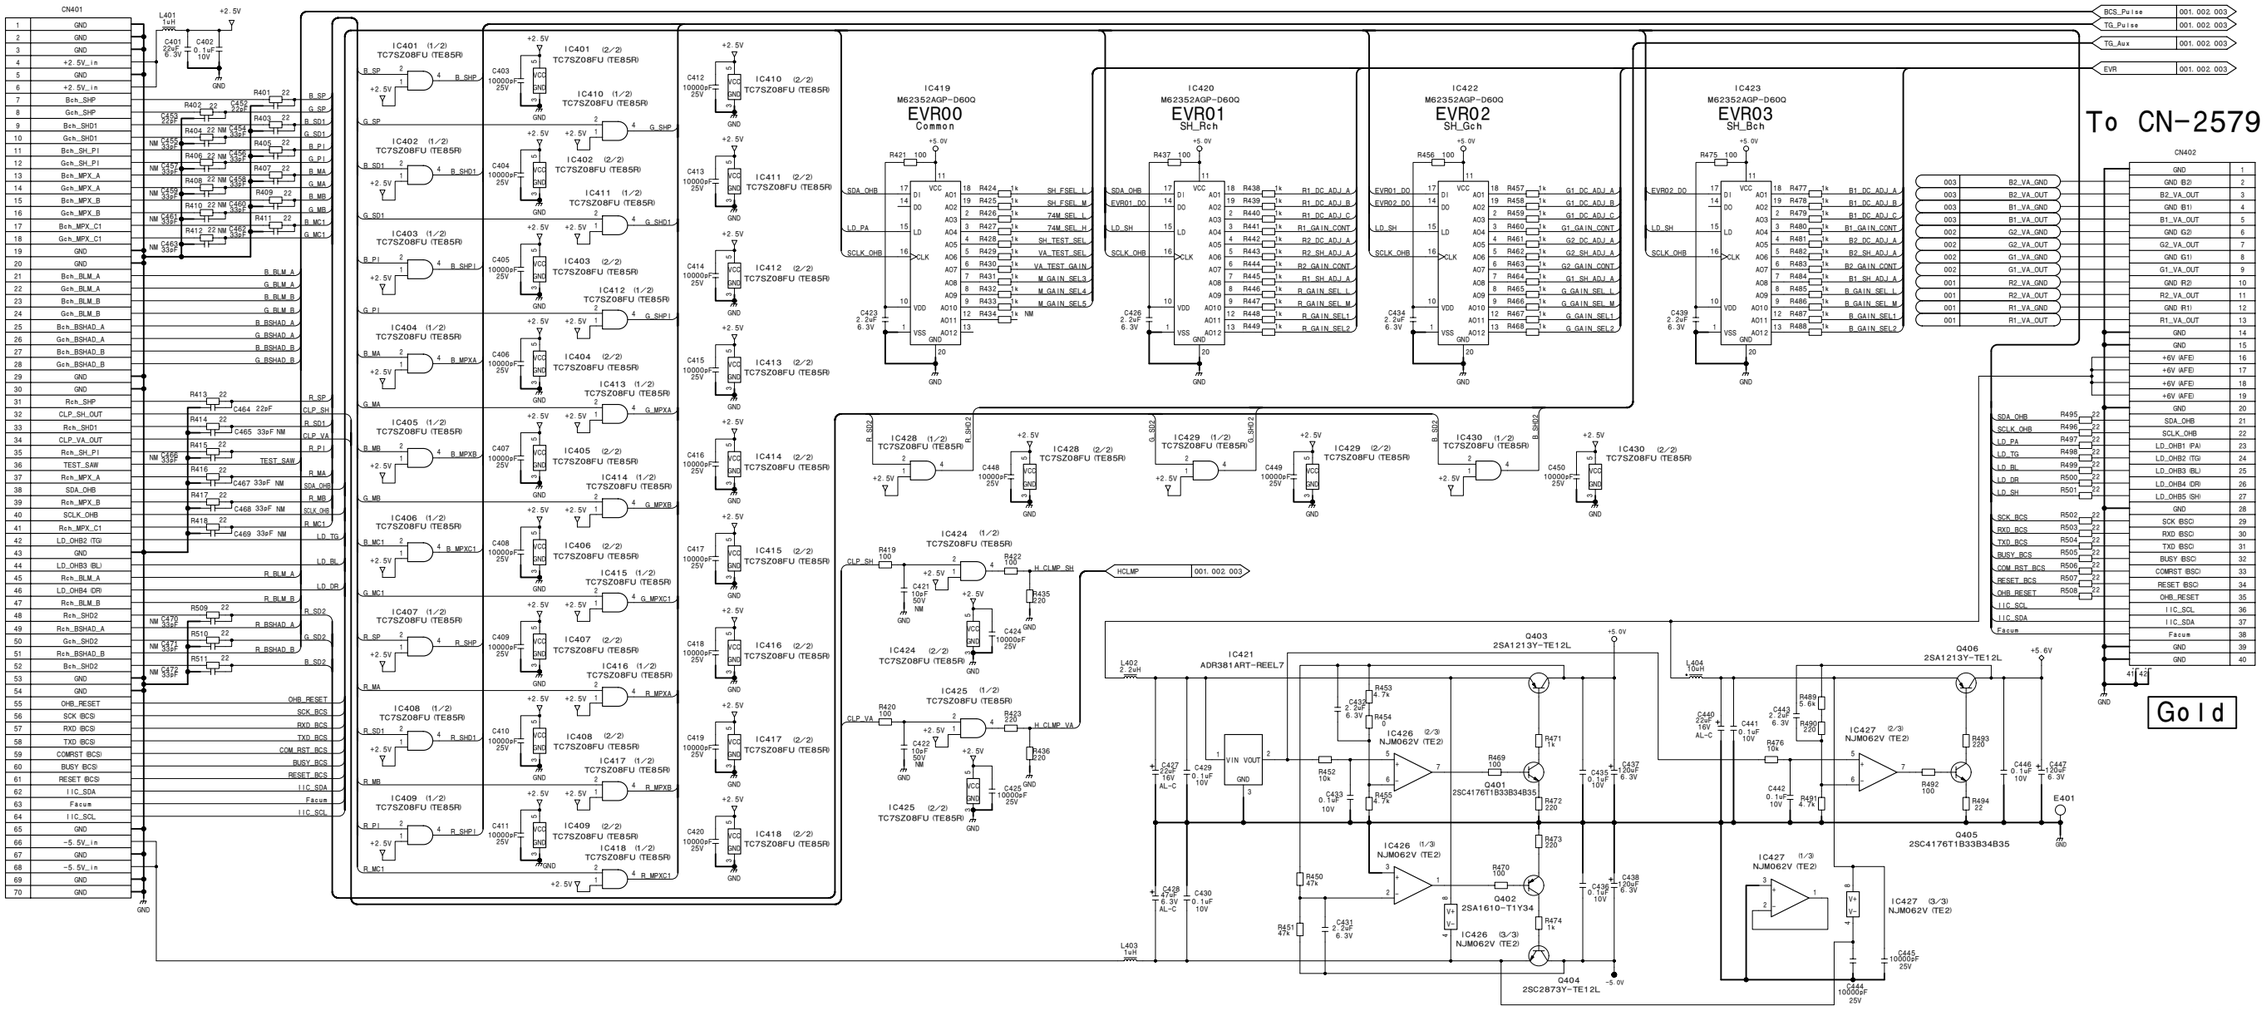


PA-317 (4/4)
BOARD NO. 1-865-971-21
HDC-1500_PA-317CG_021_4

4-84 (a)


PA-317C (1/4)
SUFFIX: -21

PA-317C (1/4)
SUFFIX: -21

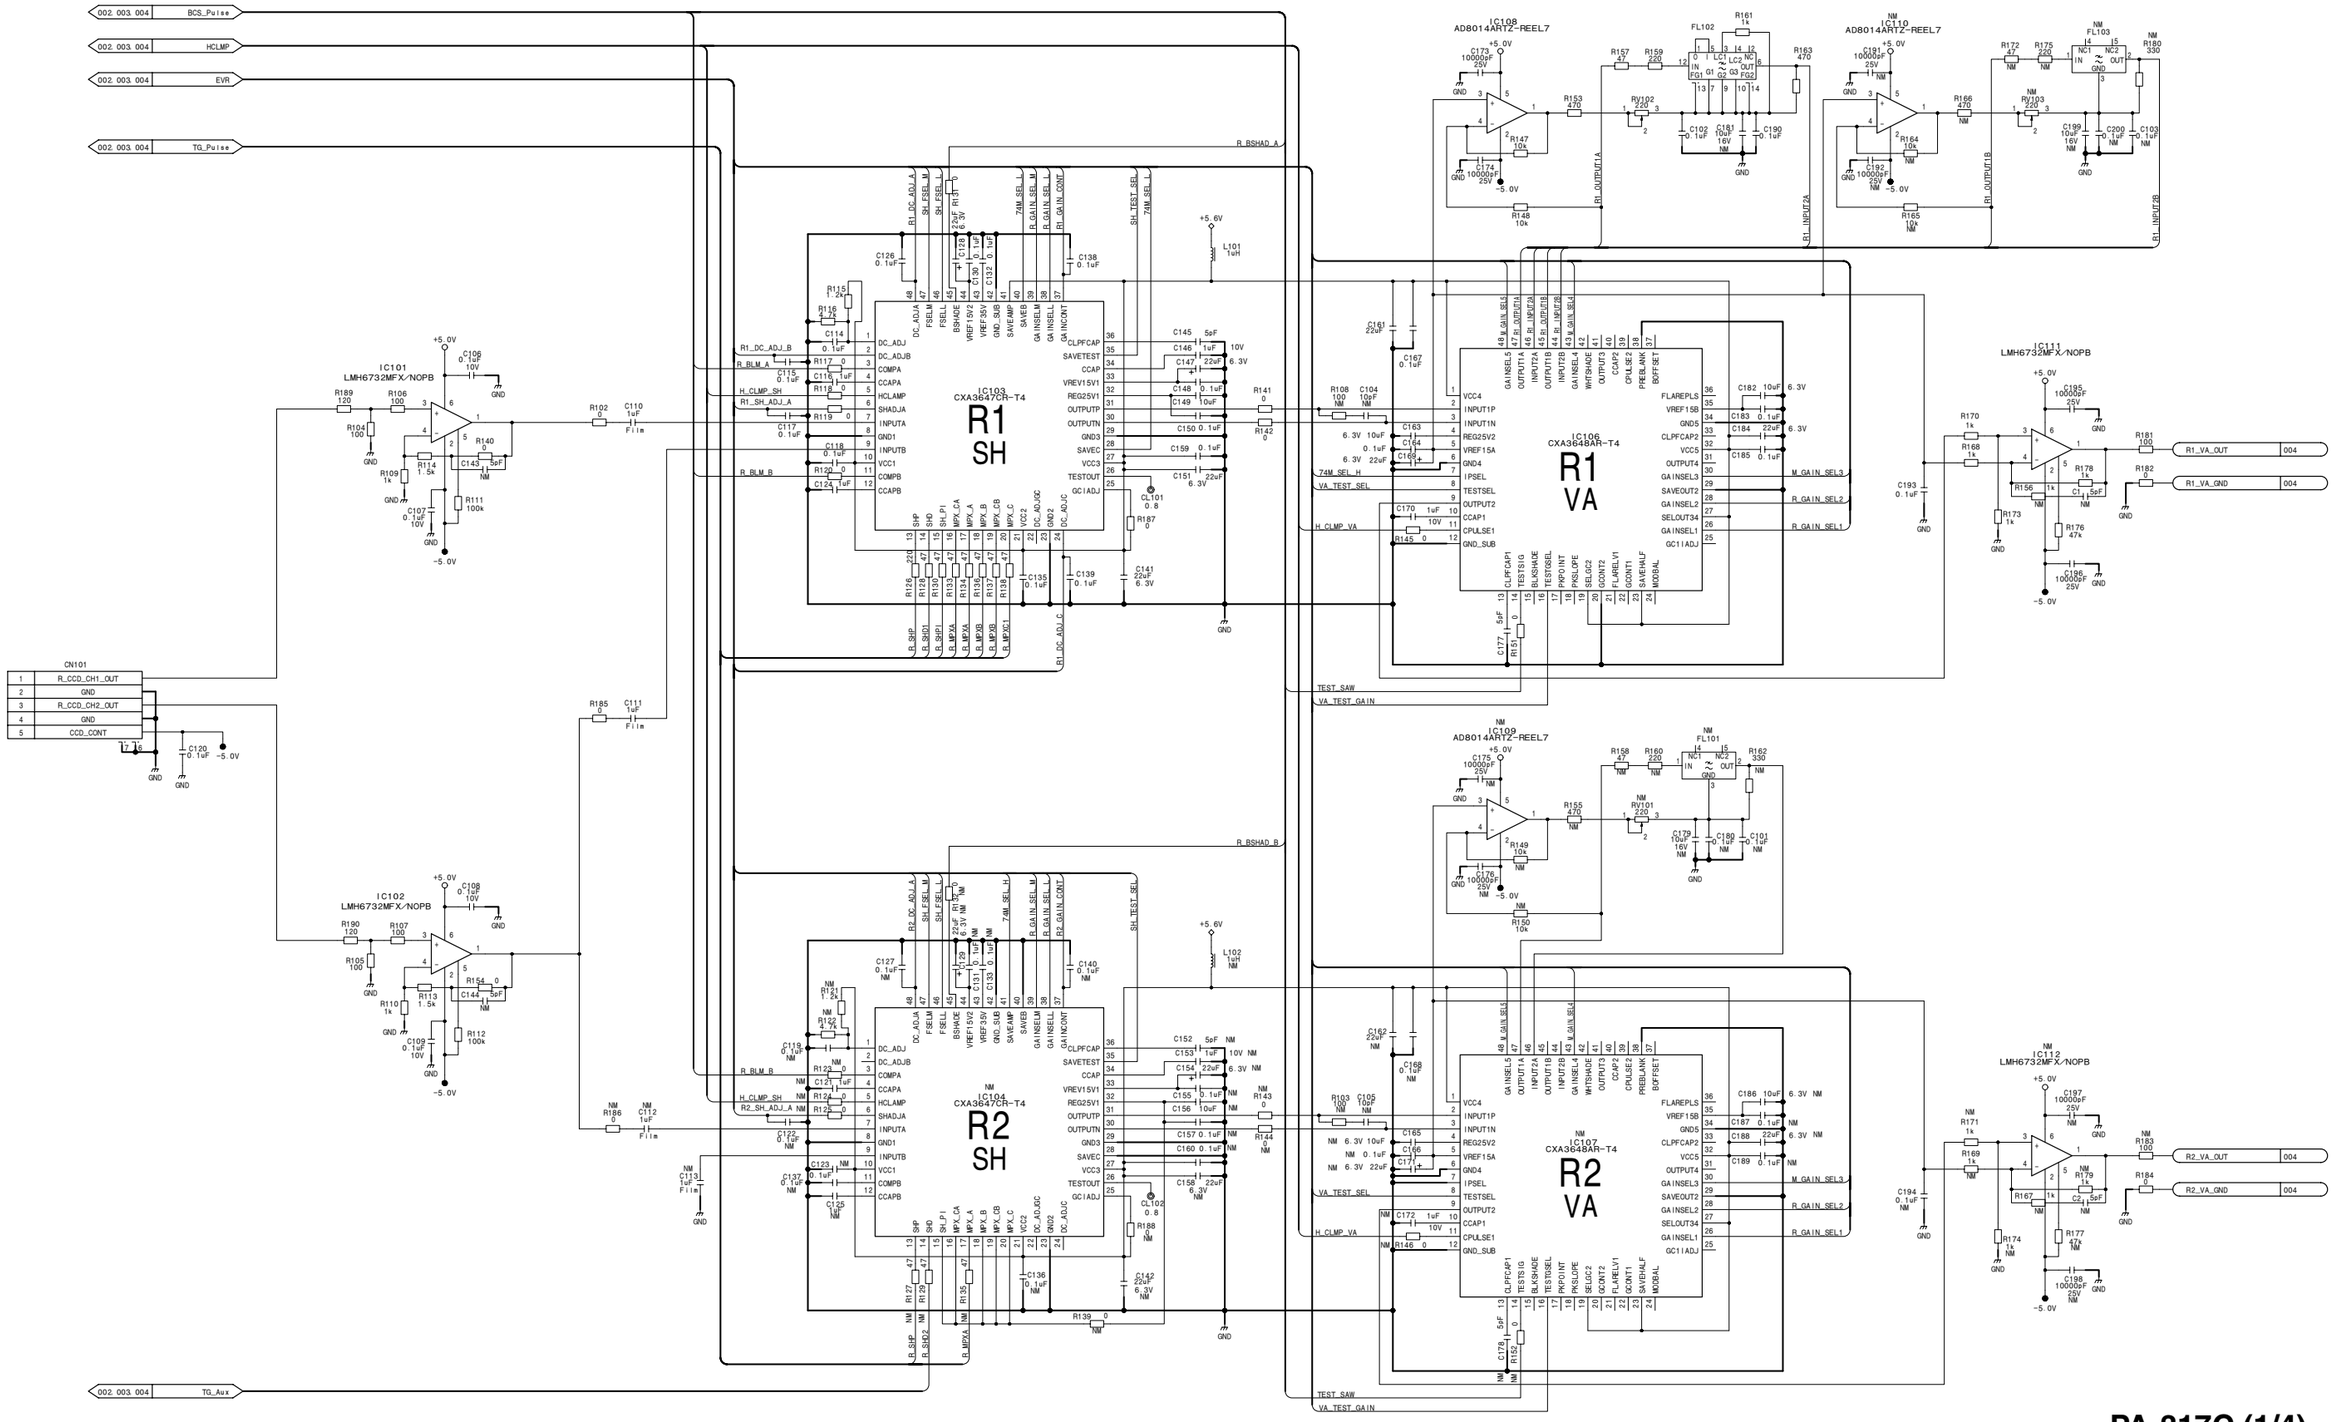


PA-317C (1/4)
BOARD NO. 1-865-971-21
HDC-1500_PA-317CG_021_1


PA-317C (2/4)
SUFFIX: -21

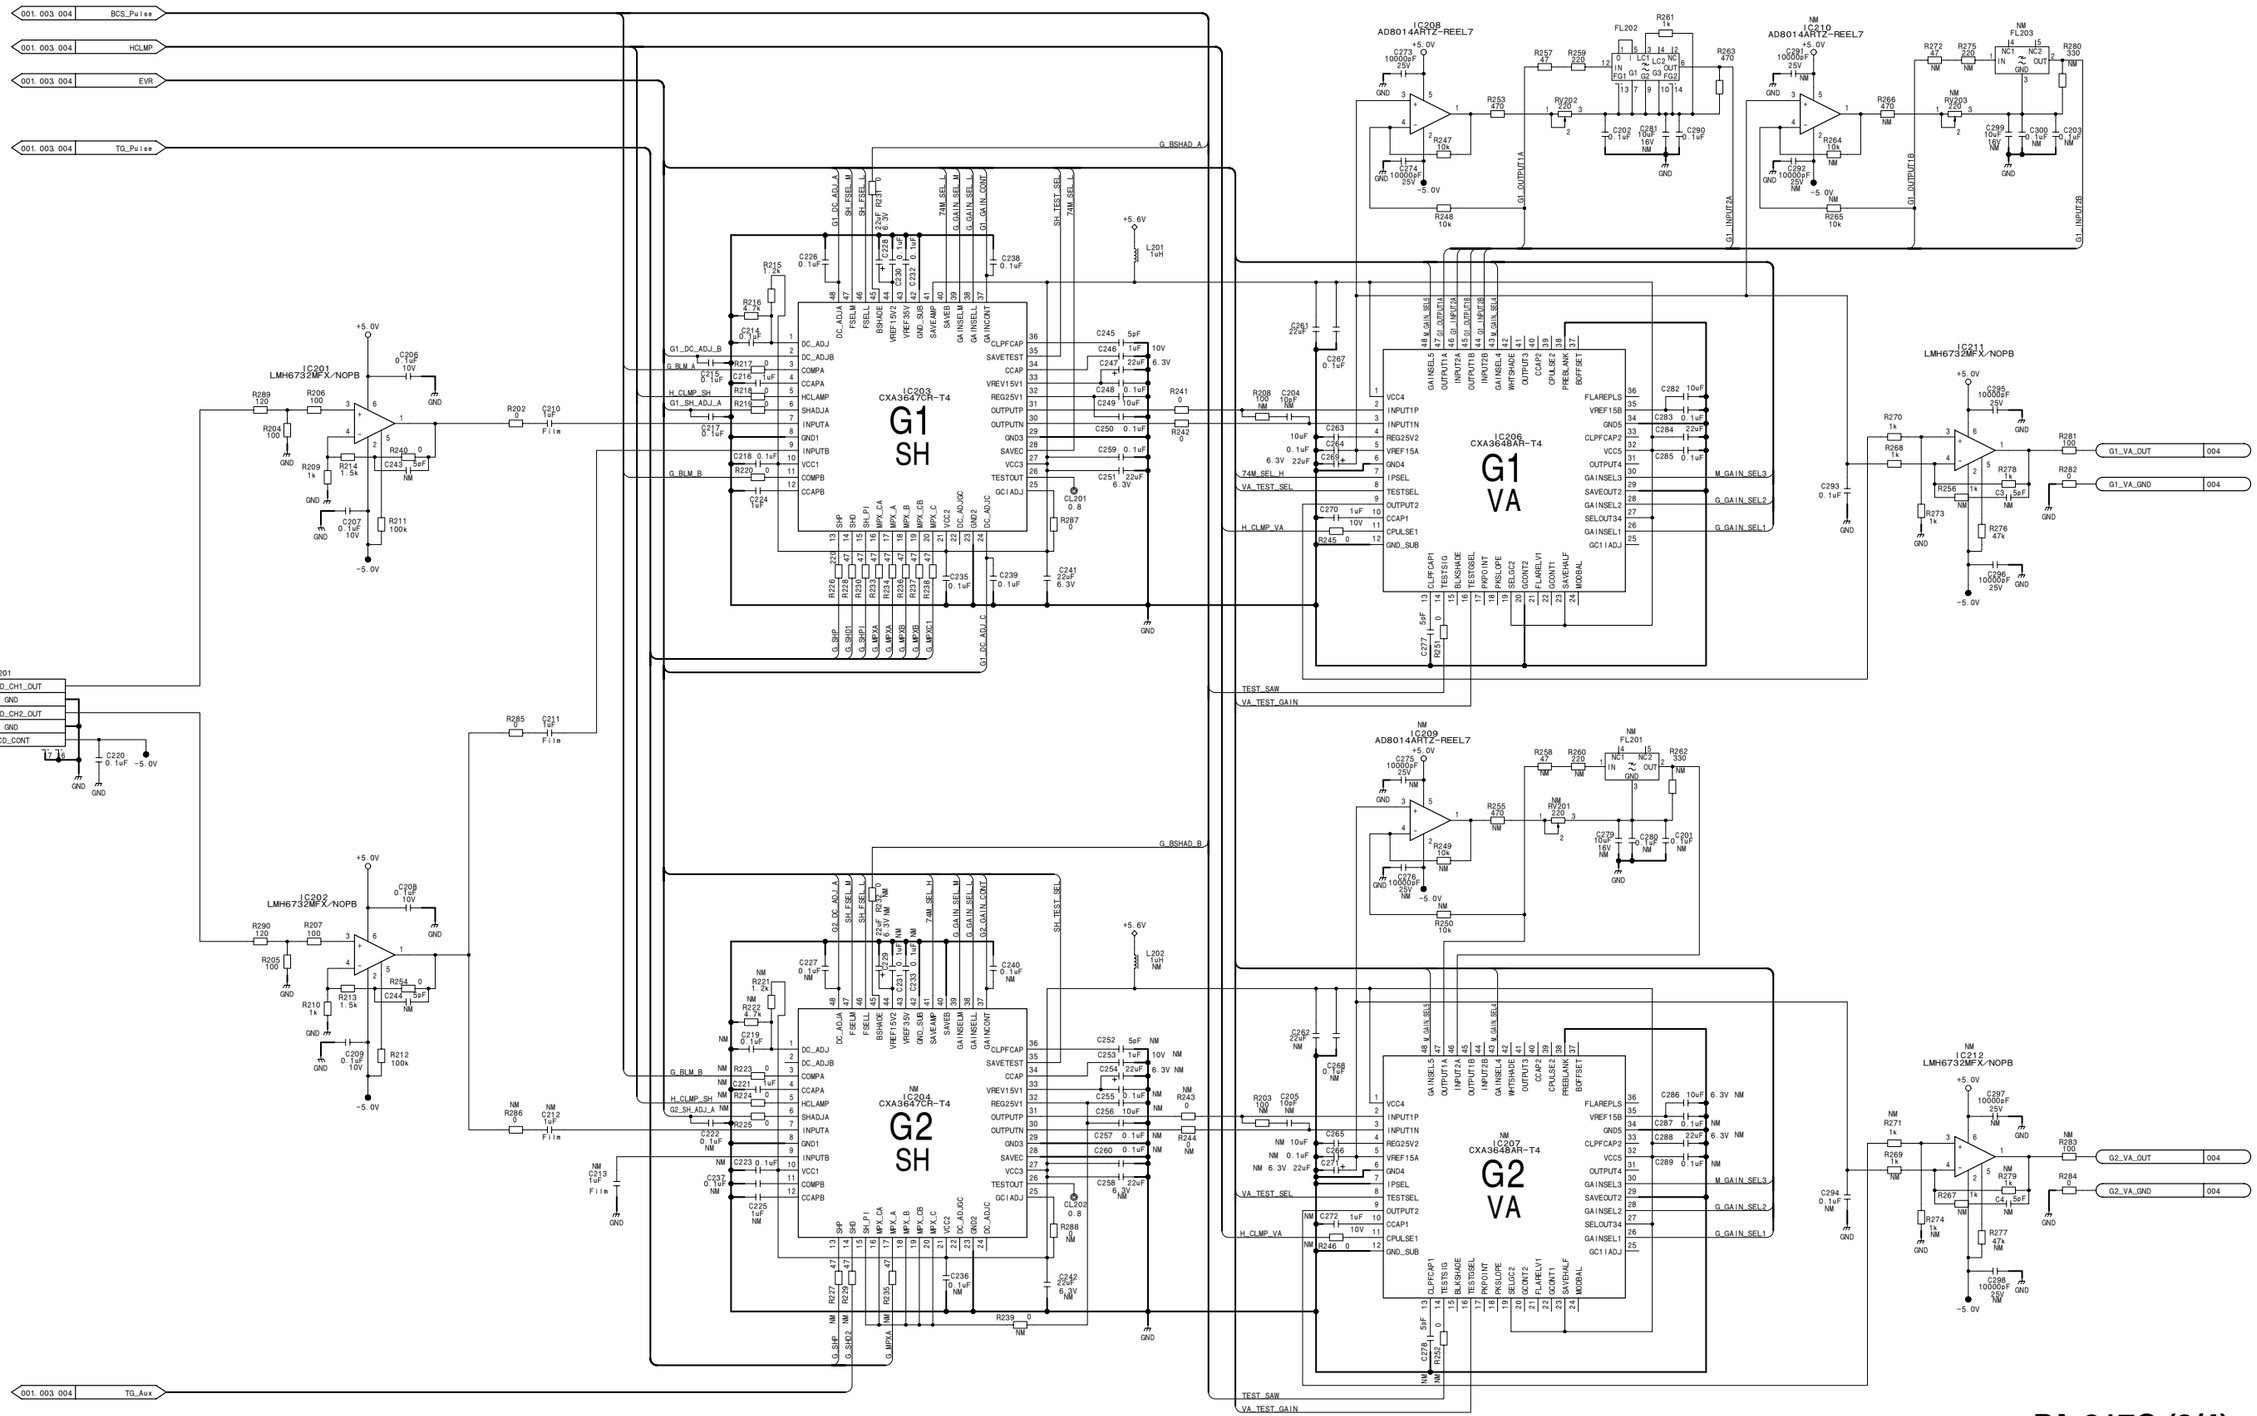


PA-317C (2/4)
BOARD NO. 1-865-971-21
HDC-1500_PA-317CG_021_2

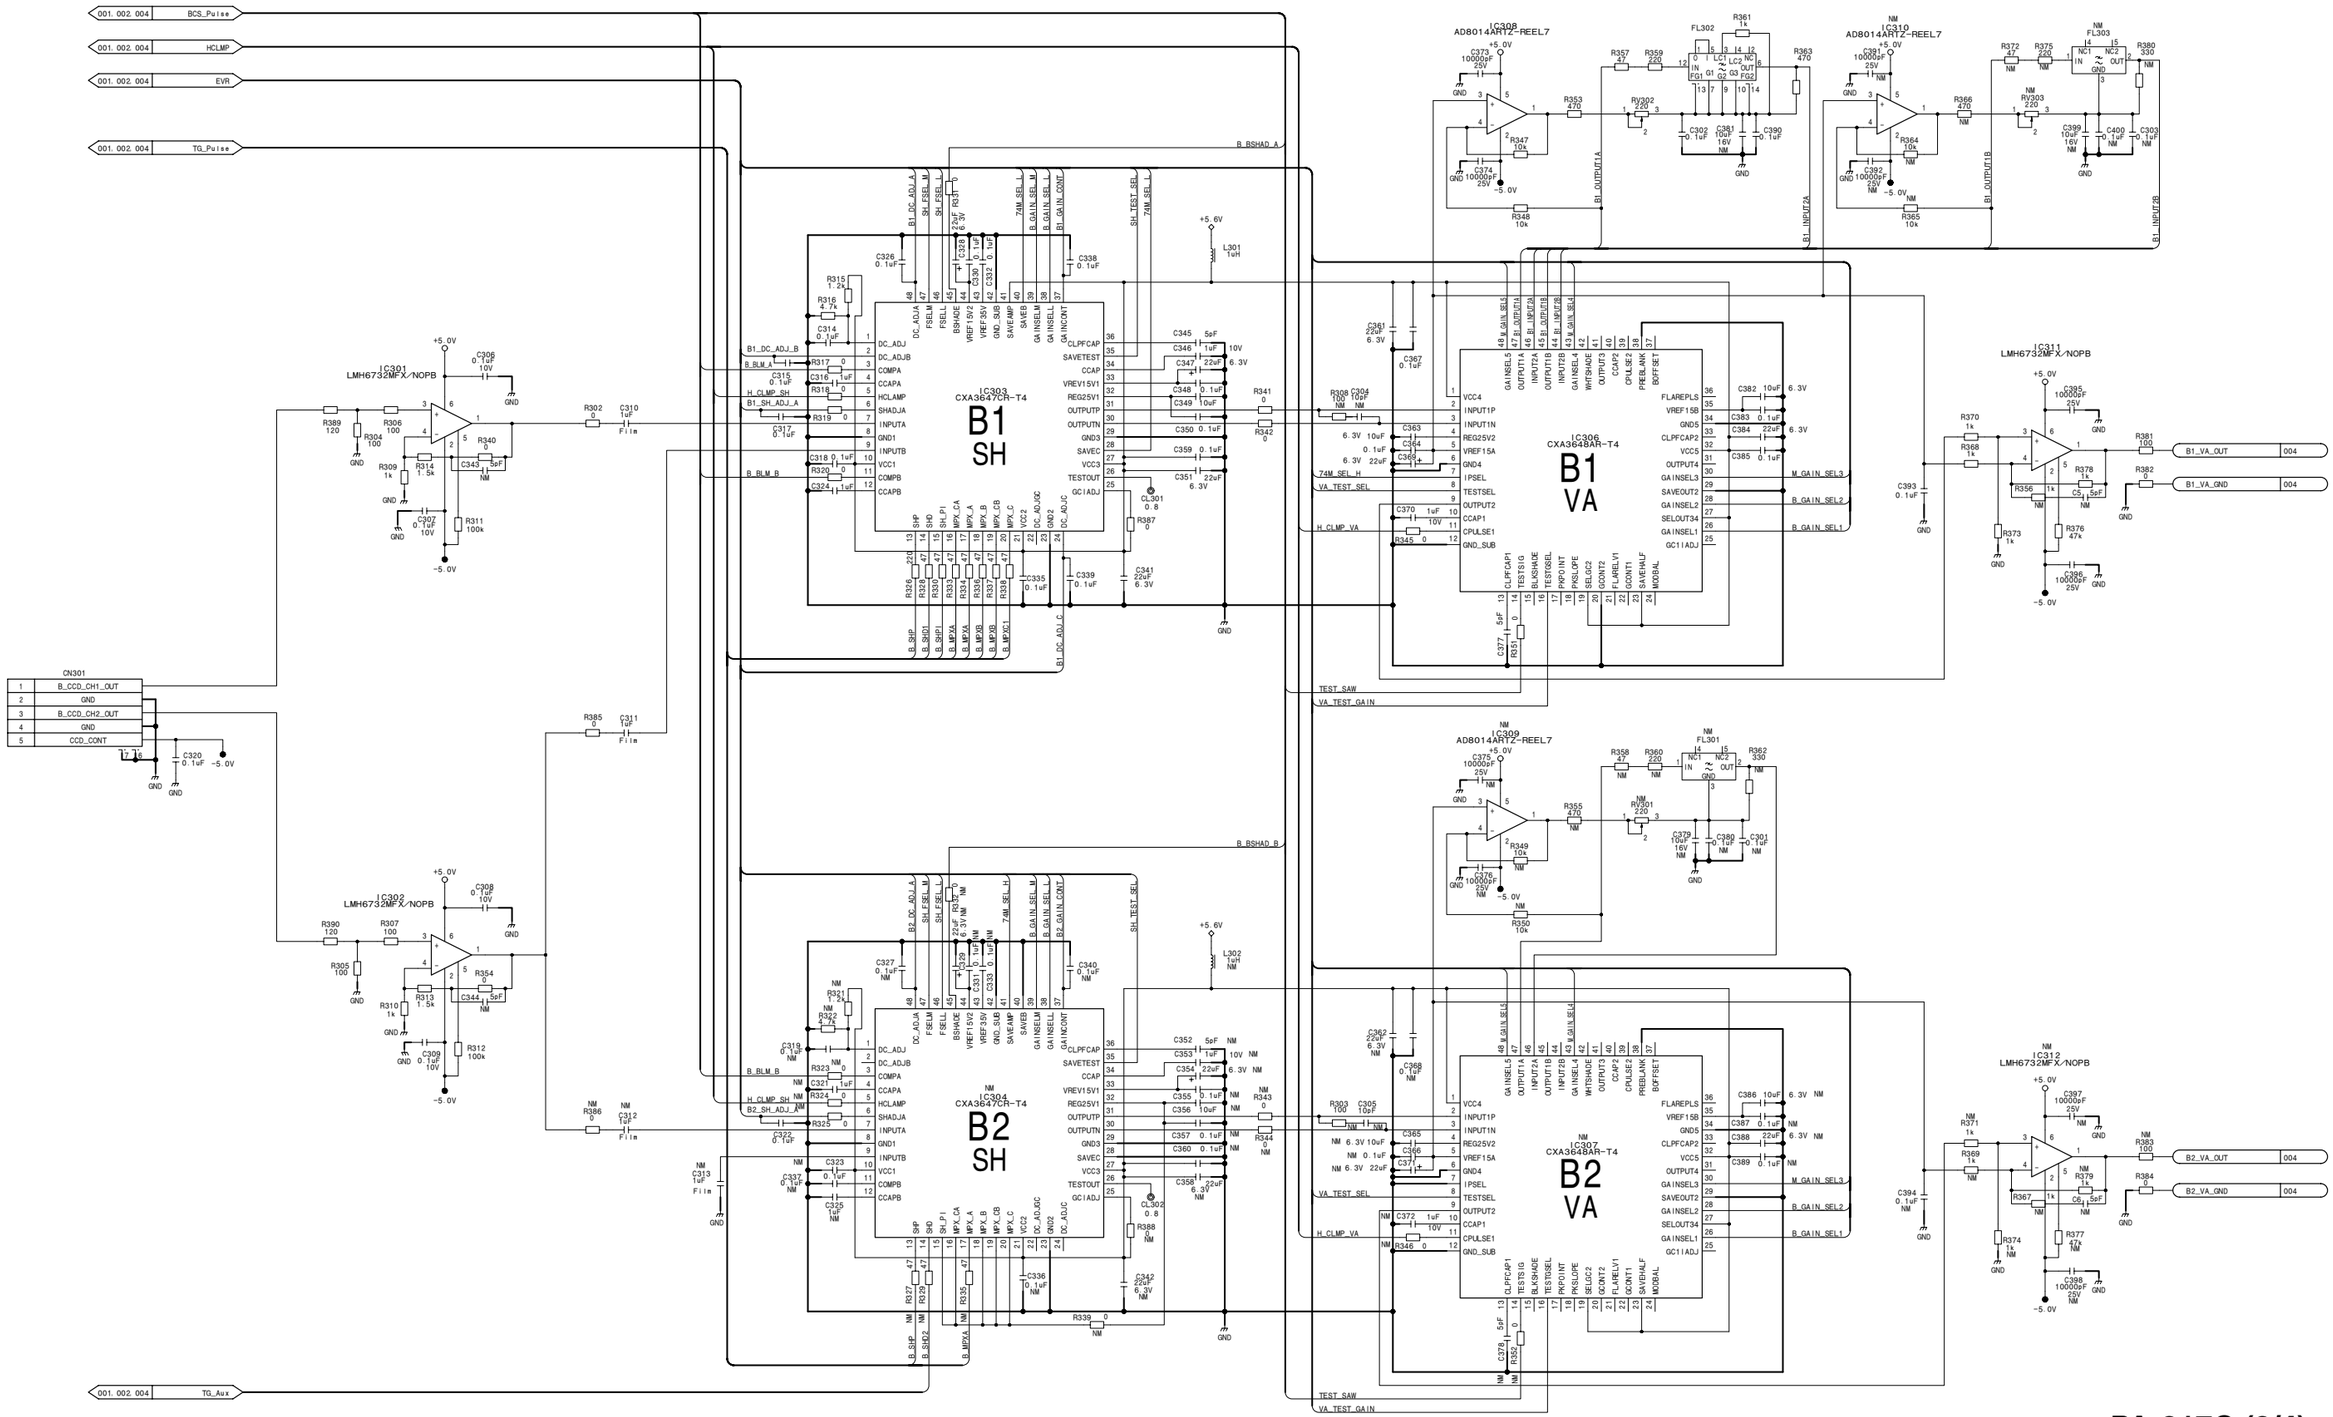


PA-317C (3/4)
BOARD NO. 1-865-971-21
HDC-1500_PA-317CG_021_3

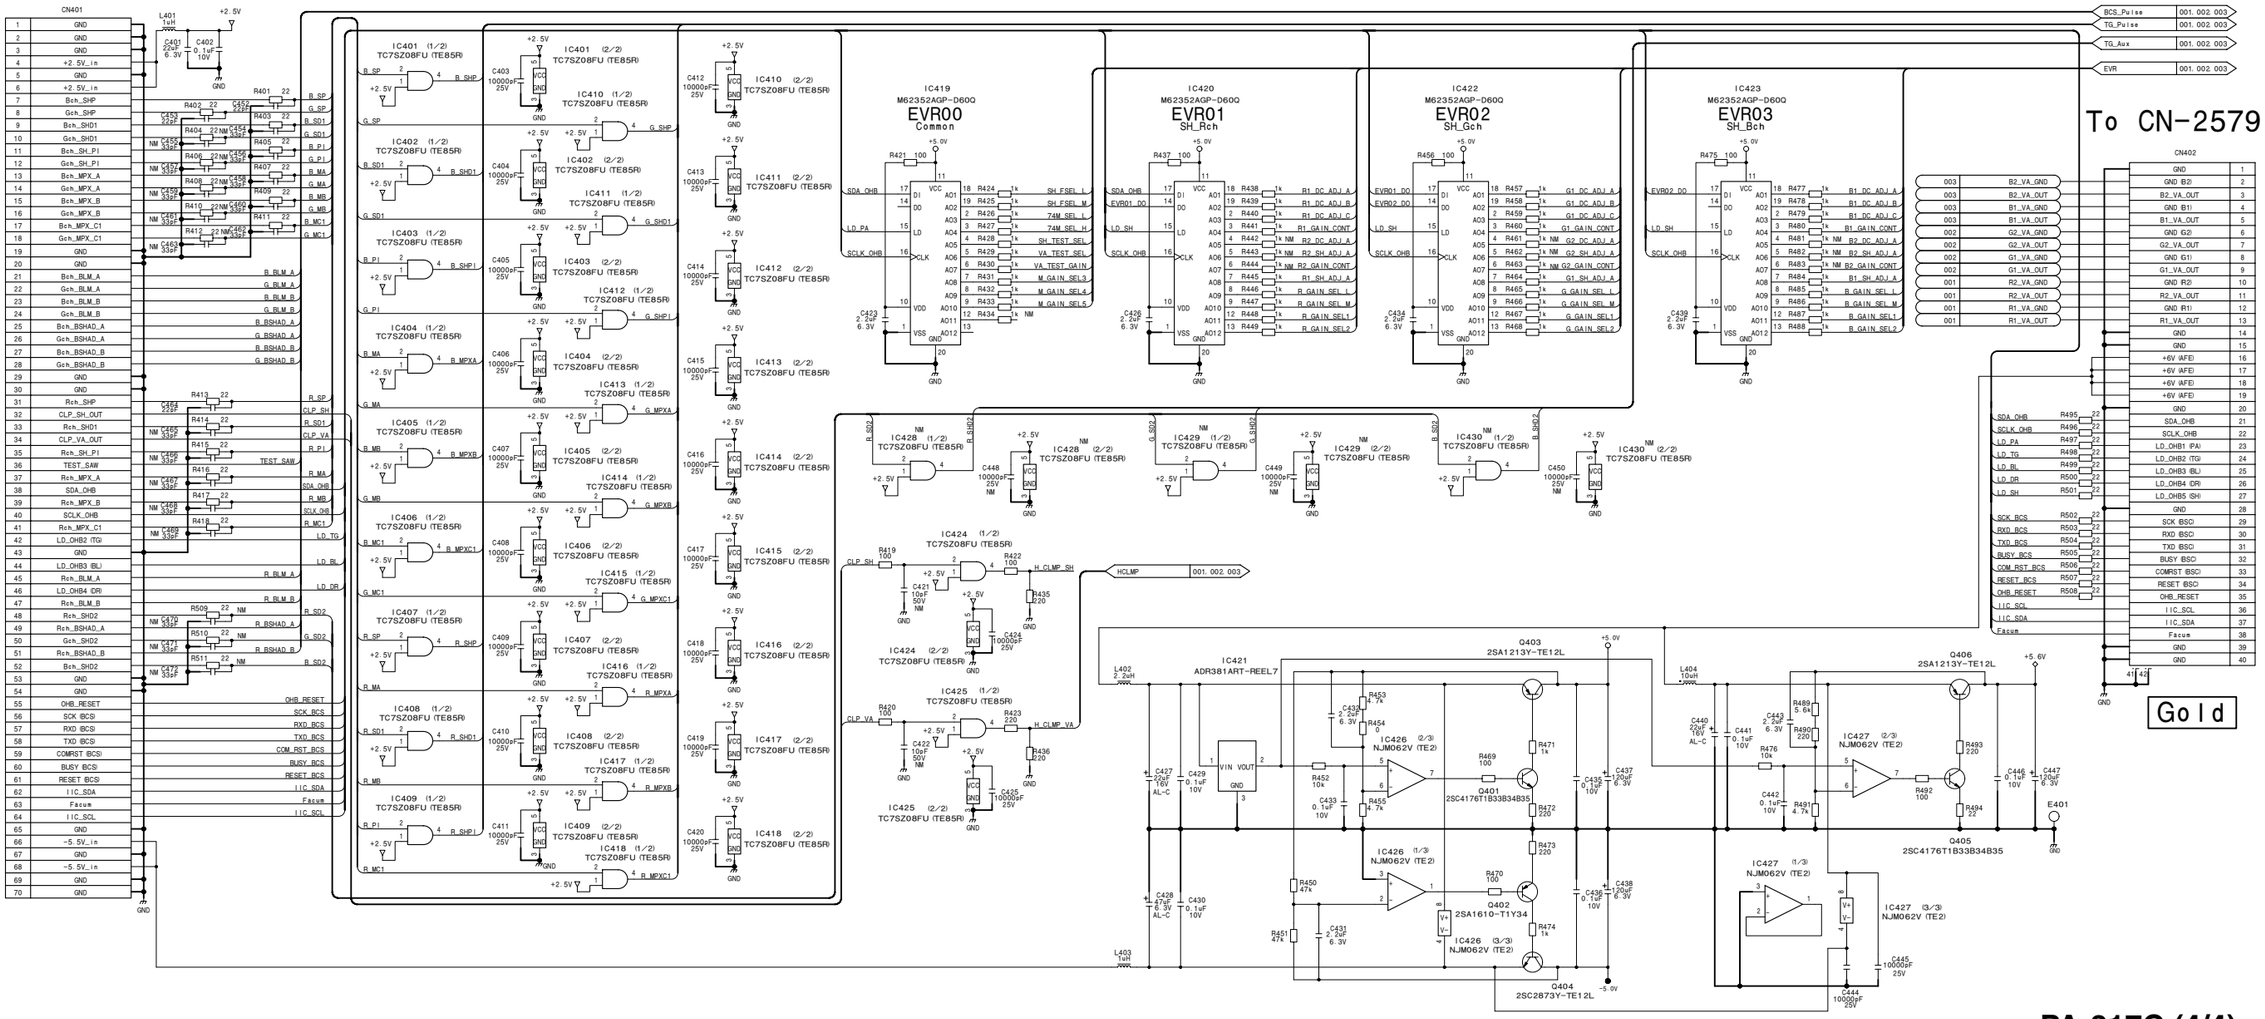

PA-317C (4/4)
BOARD NO. 1-865-971-21
HDC-1500_PA-317CG_021_4

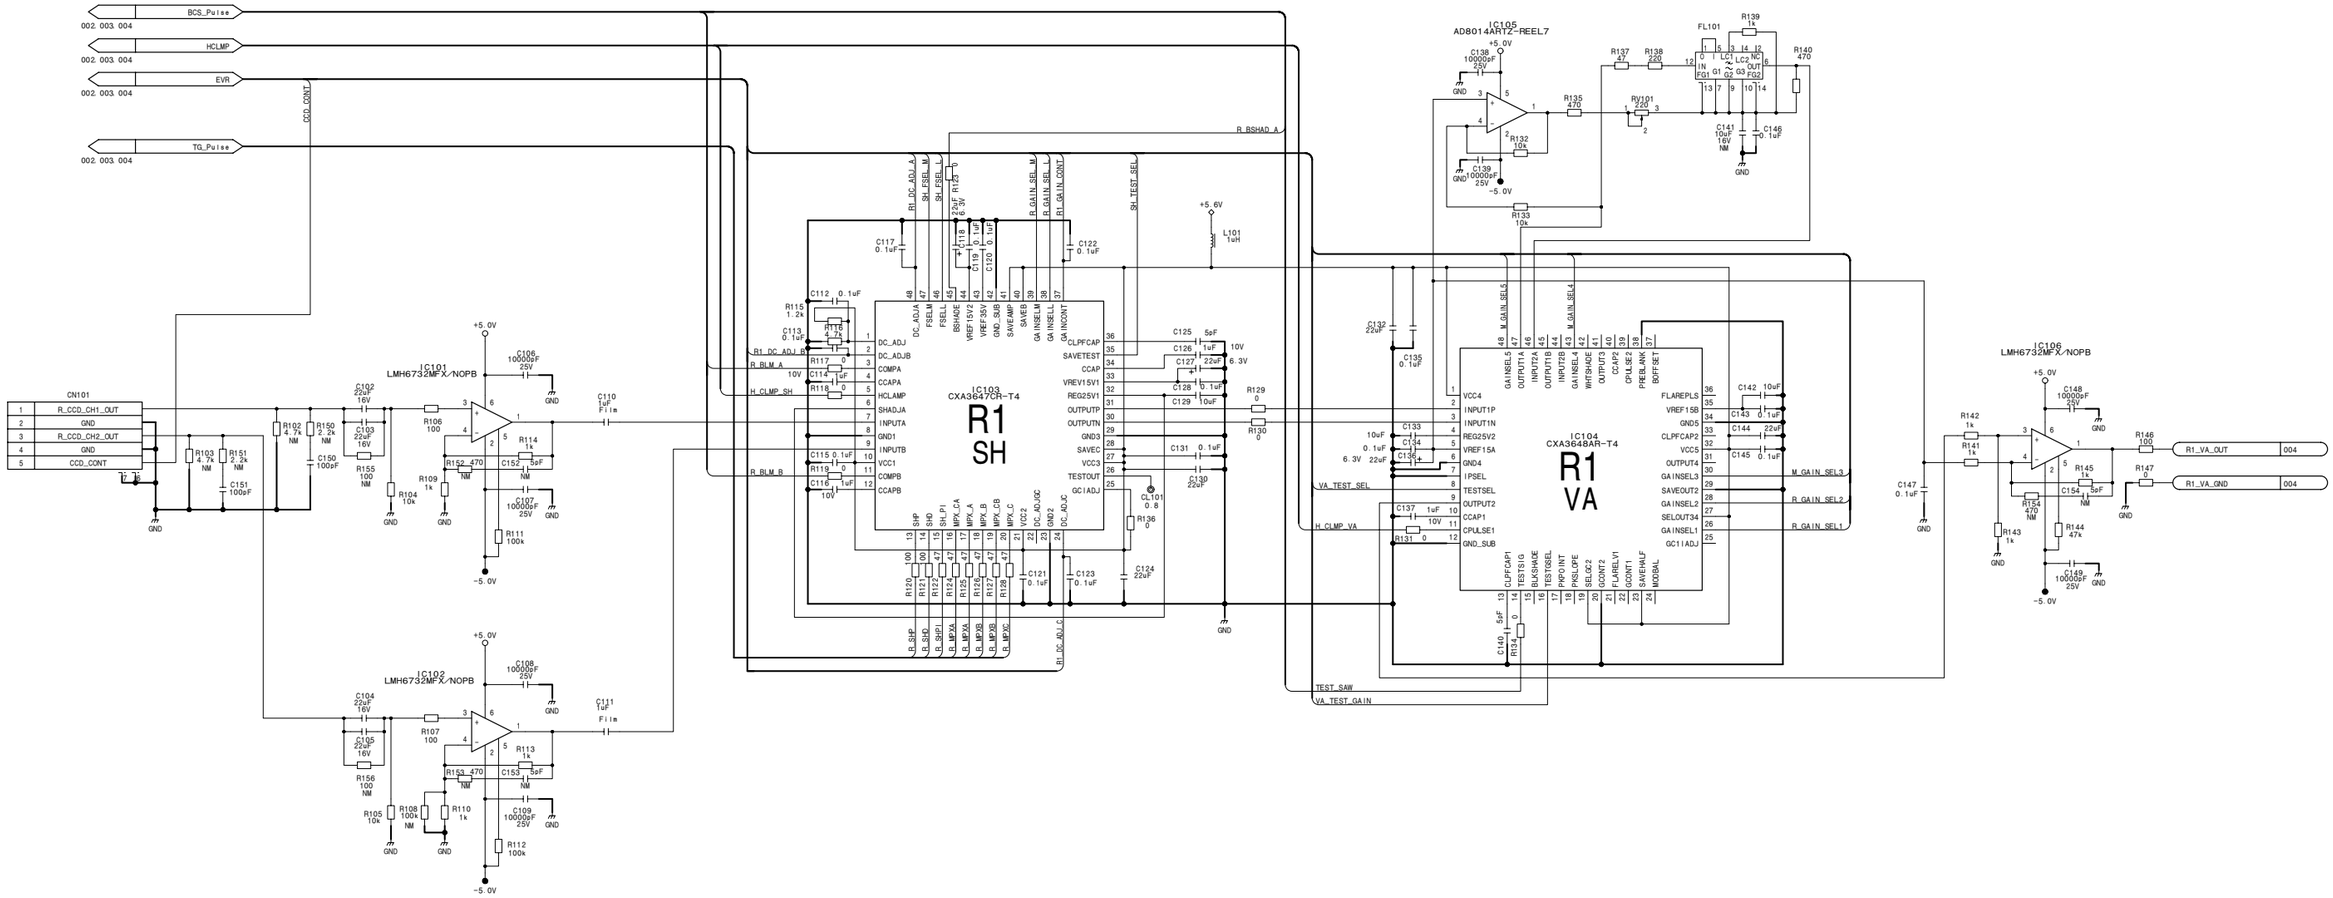




PA-327 (1/4)

BOARD NO. 1-865-959-11, 21


HDC-1600_PA-327_011_1

PA-327 (2/4)
SUFFIX: -11, 21

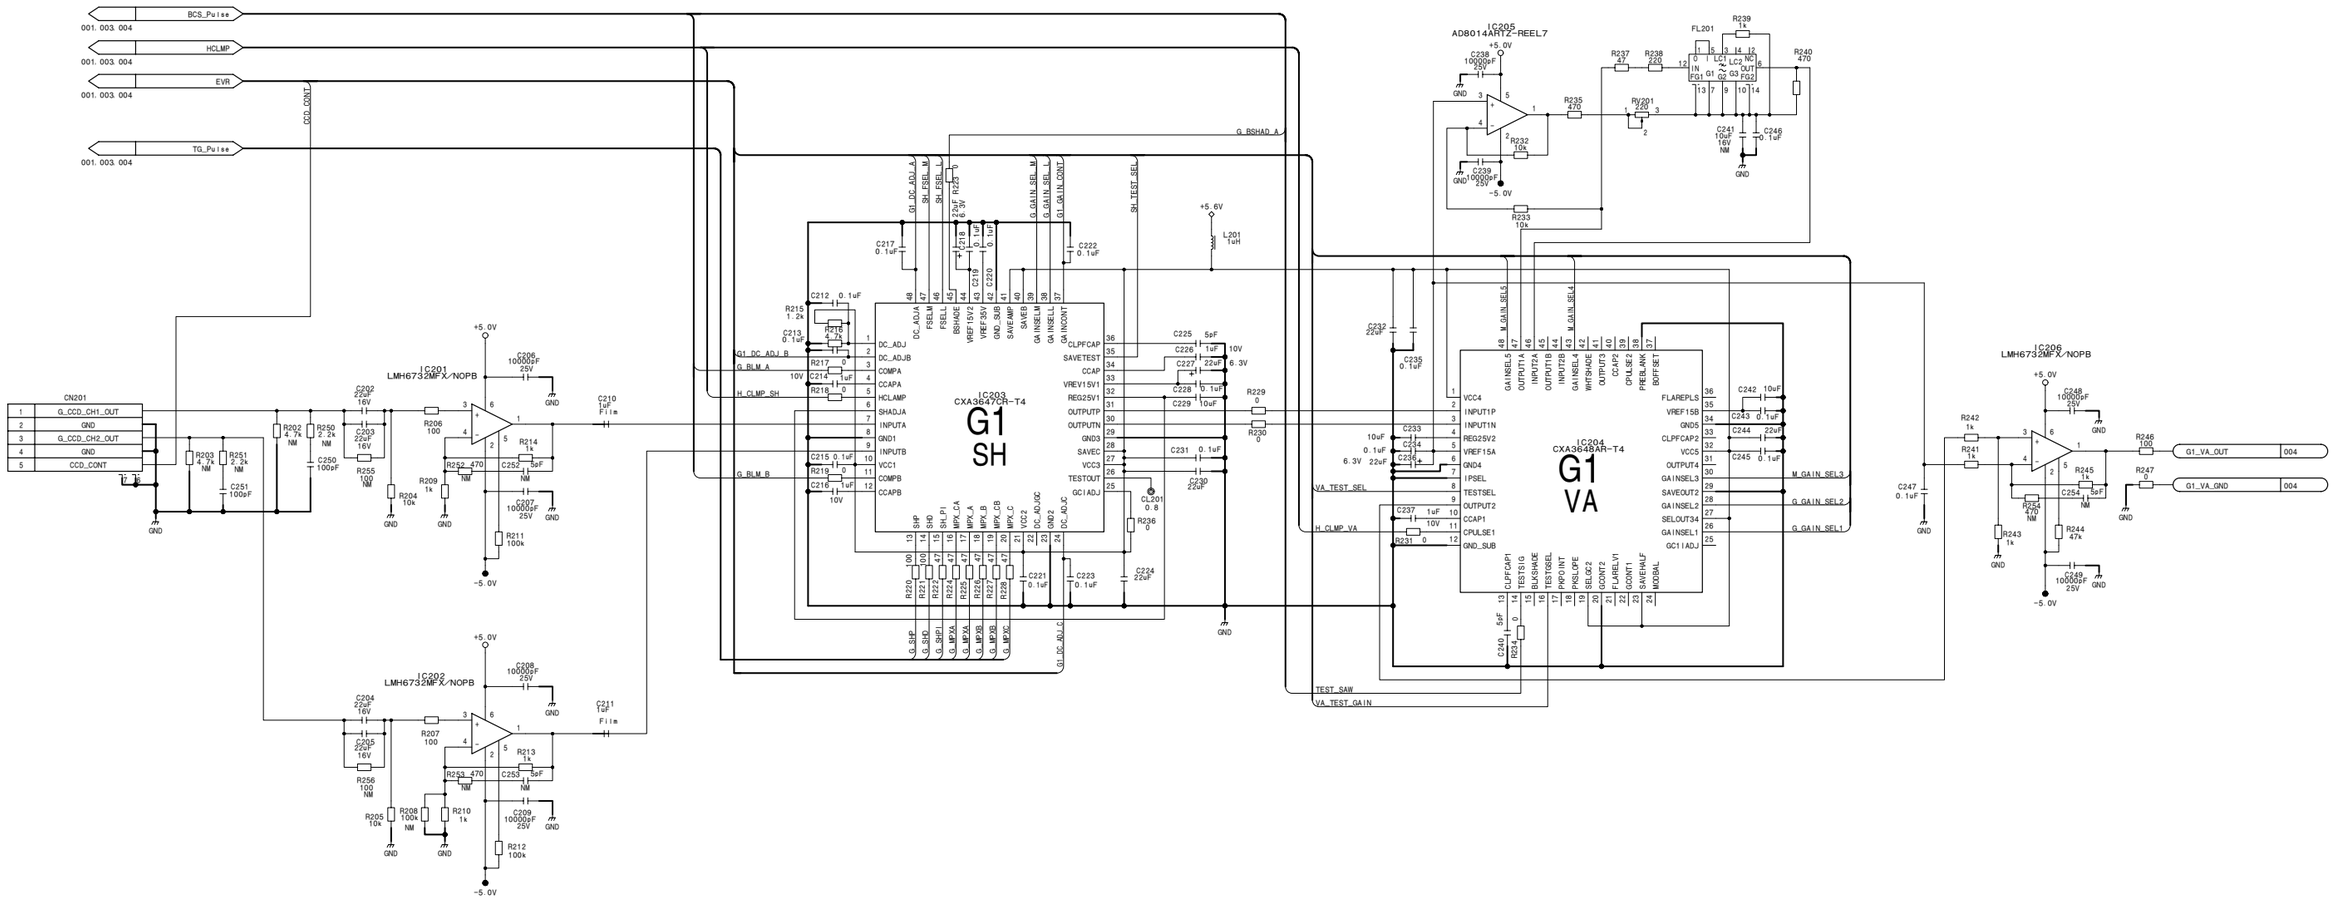


4-90

PA-327 (2/4)
BOARD NO. 1-865-959-11, 21
HDC-1600_PA-327_011_2

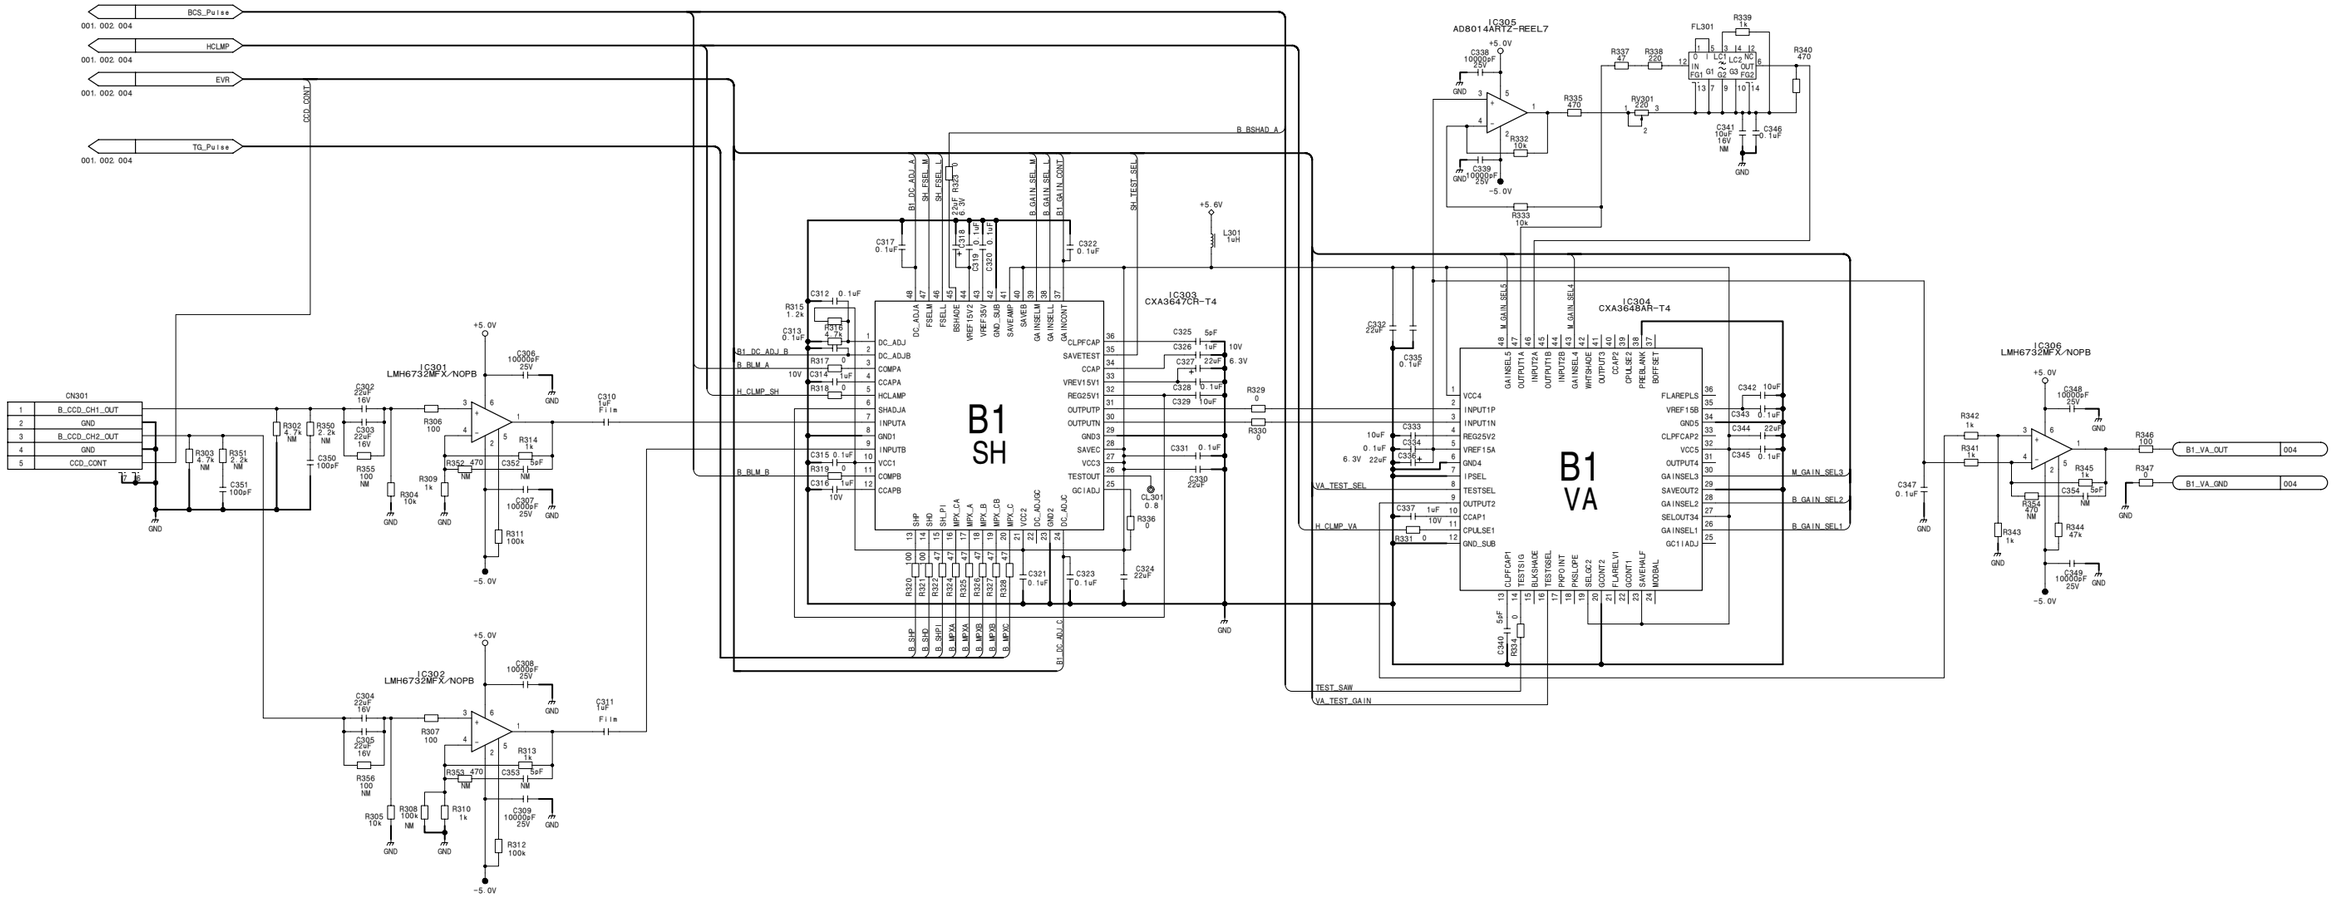


PA-327 (3/4)
BOARD NO. 1-865-959-11, 21
HDC-1600_PA-327_011_3

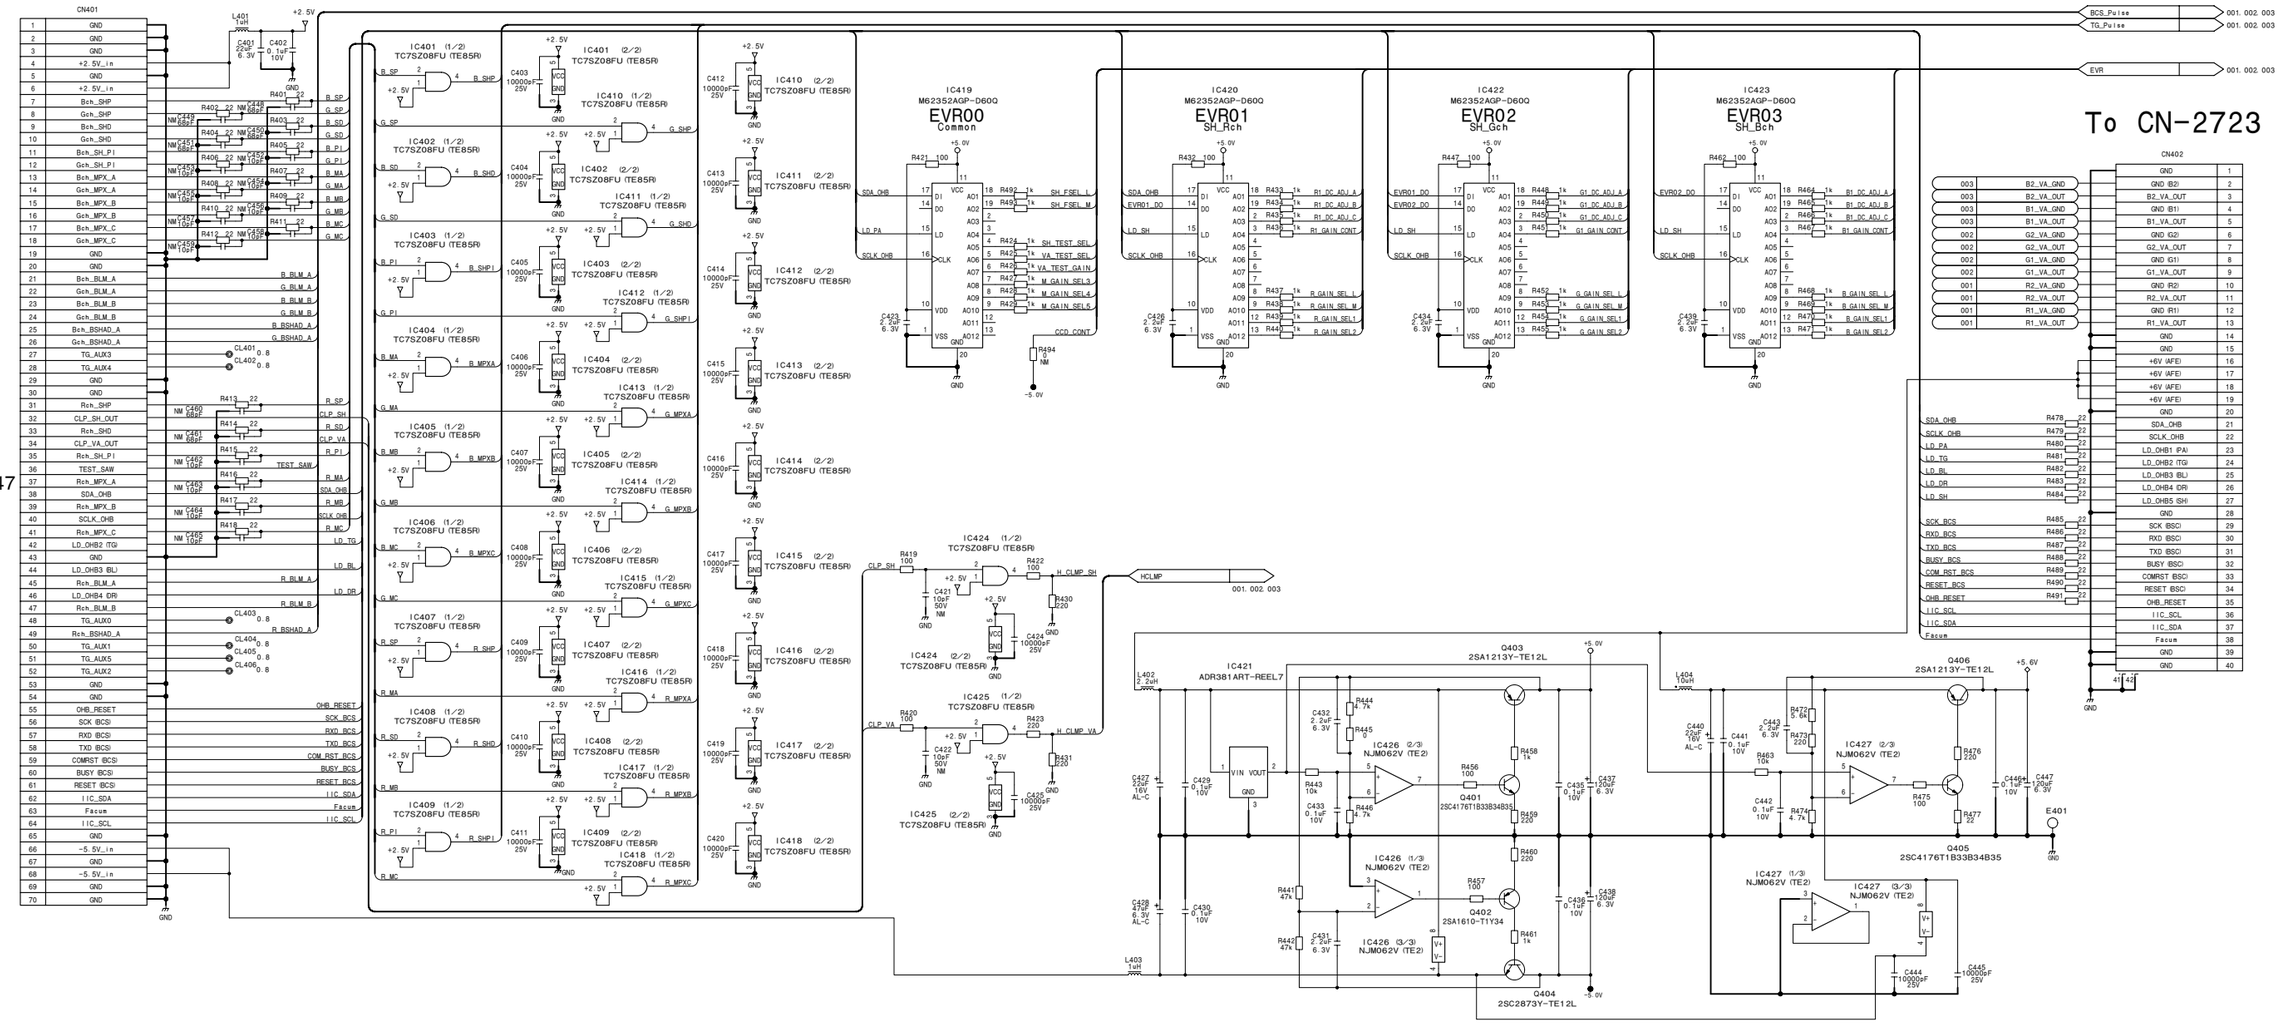

PA-327 (4/4)
BOARD NO. 1-865-959-11, 21
HDC-1600_PA-327_011_4

SDI-84 (1/4)
SUFFIX: -12, 13


SDI-84 (1/4)
SUFFIX: -12, 13

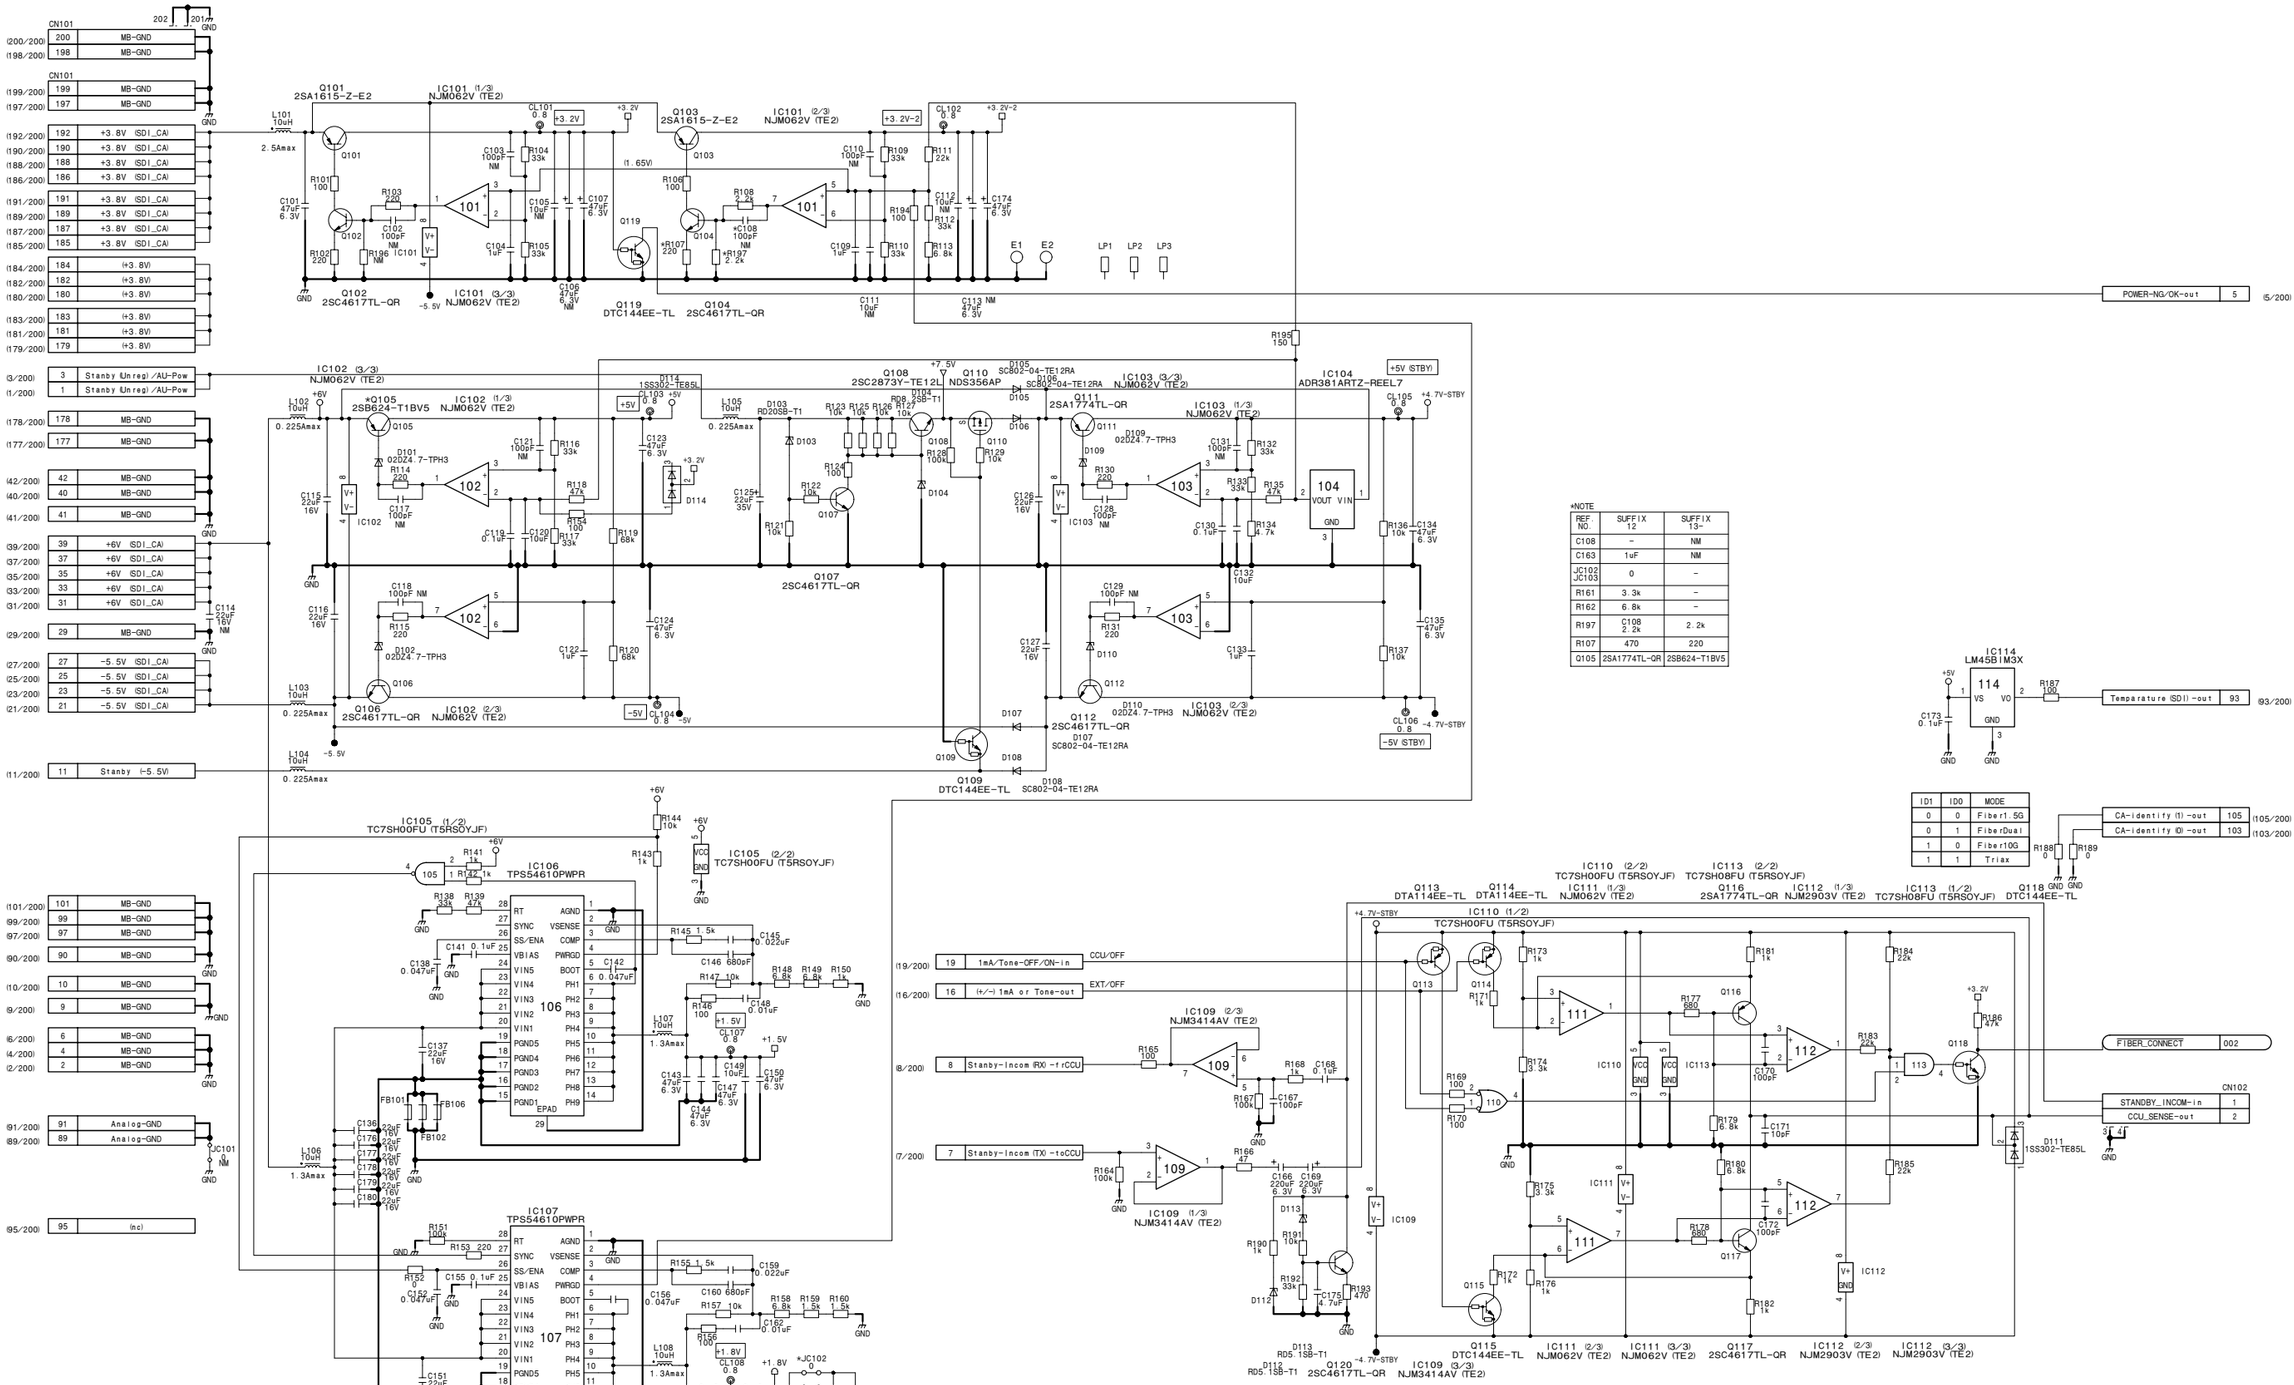


*NOTE

REF NO.	SUFFIX 12	SUFFIX 13-
C108	-	NM
C163	1uF	NM
JC102 JC103	0	-
R161	3.3k	-
R162	6.8k	-
R197	C108 2.2k	2.2k
R107	470	220
Q105	2SA1774TL-QR	2SB624-T1BV5

SDI-84 (1/4)
BOARD NO. 1-865-930-12, 13
HDC-1500_SDI-84_013_1

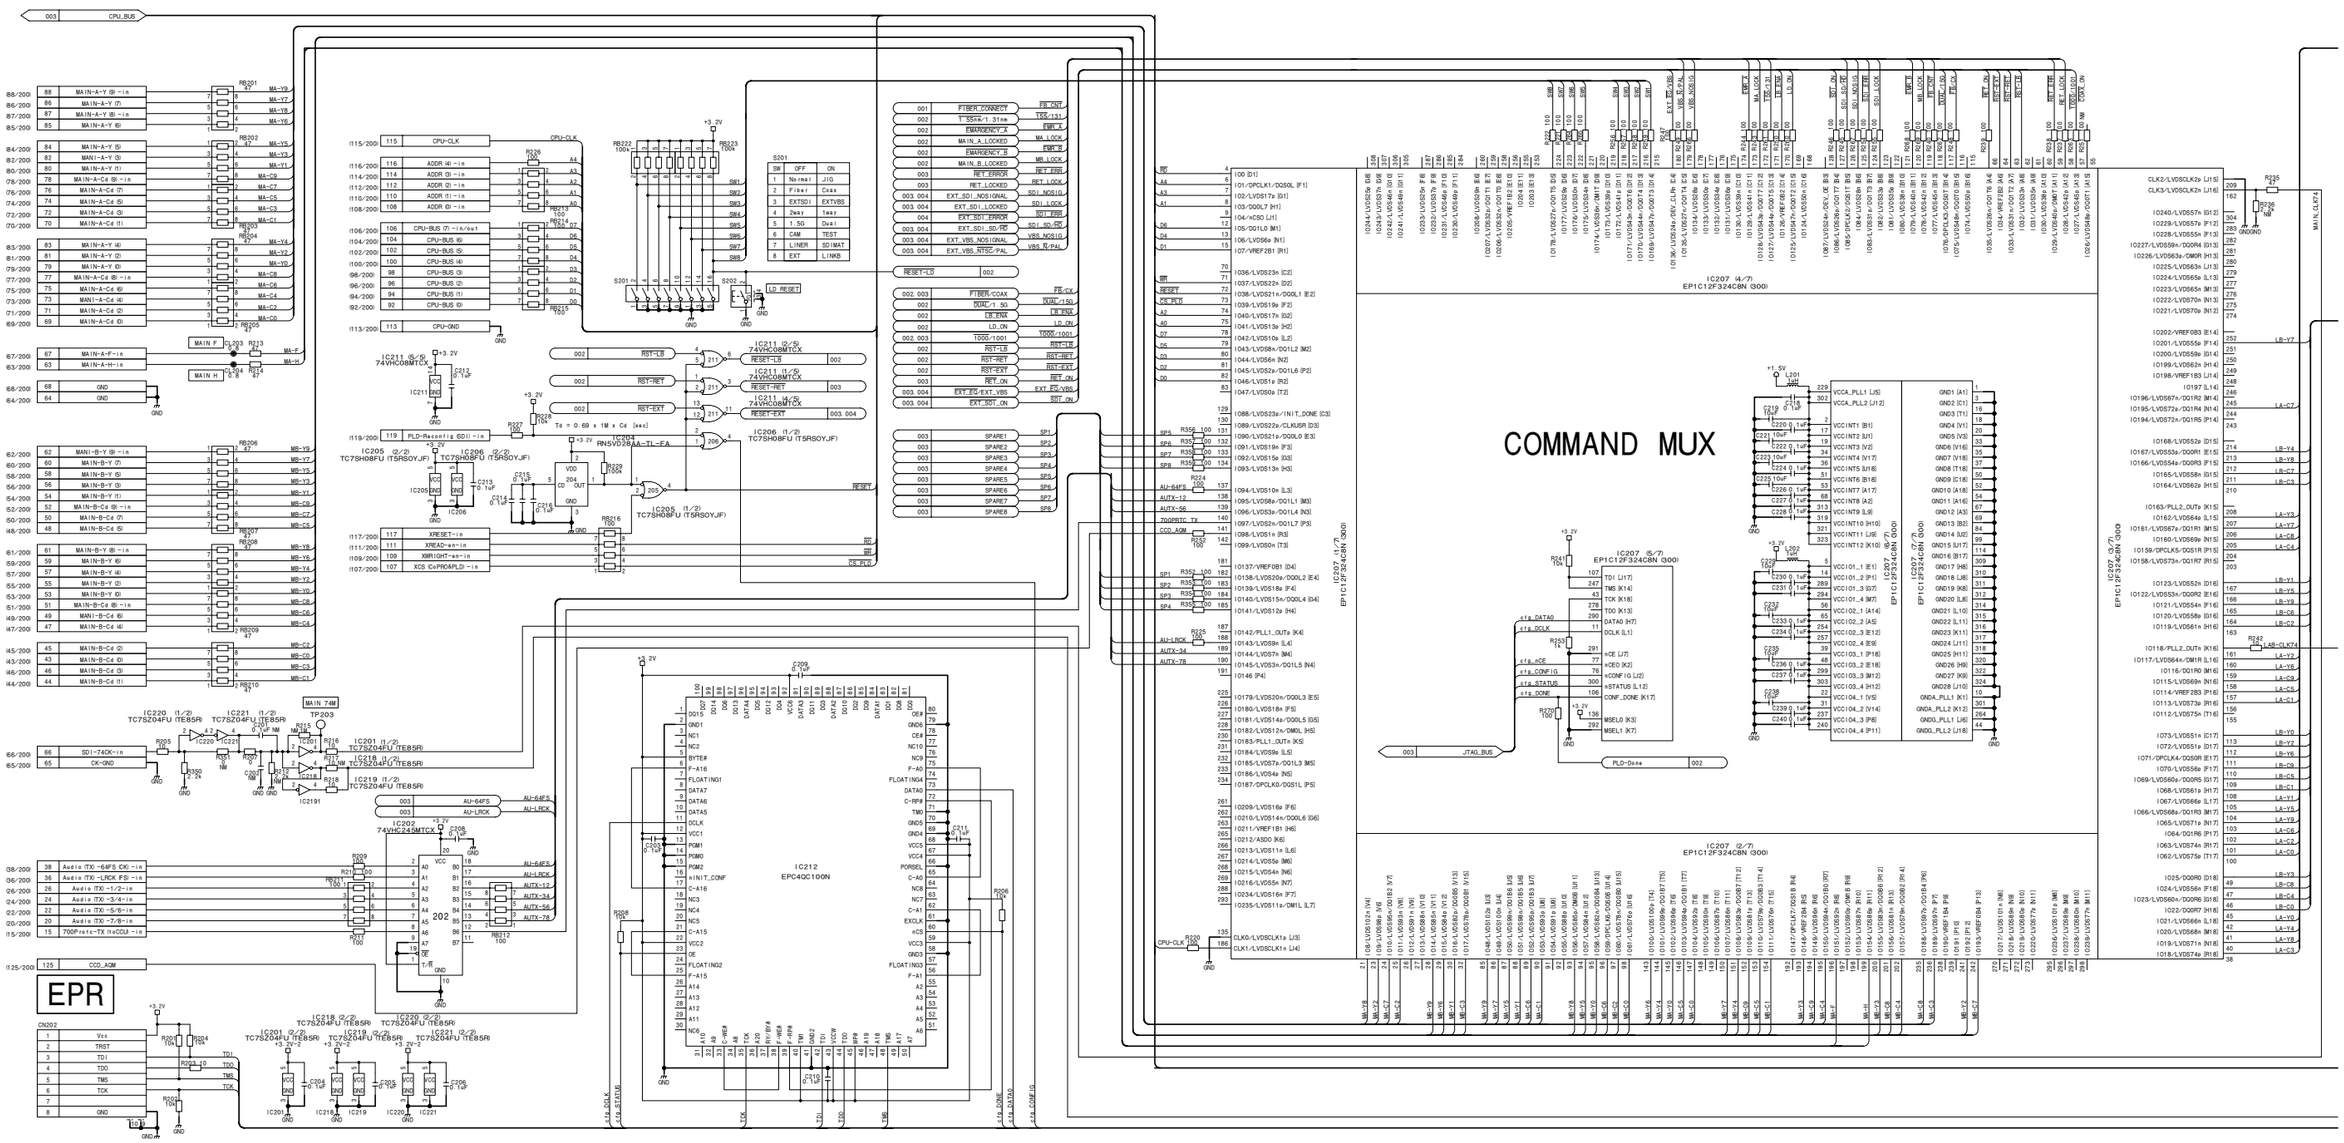
COMMAND MUX
EPR
IC207 (1/7) EP1C12F324C8N (300)
IC207 (2/7) EP1C12F324C8N (300)
IC207 (3/7) EP1C12F324C8N (300)
IC207 (4/7) EP1C12F324C8N (300)
IC207 (5/7) EP1C12F324C8N (300)
IC207 (6/7) EP1C12F324C8N (300)
IC207 (7/7) EP1C12F324C8N (300)
IC212 EPC4QC100N
IC205 (2/2) TC7SH08FU (TSR5OYJF)
IC206 (2/2) TC7SH08FU (TSR5OYJF)
IC205 (1/2) TC7SH08FU (TSR5OYJF)
IC206 (1/2) TC7SH08FU (TSR5OYJF)
IC211 (5/6) 74VHC08MTCX
IC211 (1/6) 74VHC08MTCX
IC211 (4/6) 74VHC08MTCX
IC211 (2/6) 74VHC08MTCX
IC202 74VHC245MTCX
IC201 (1/2) TC7SZ04FU (TE85R)
IC201 (2/2) TC7SZ04FU (TE85R)
IC218 (1/2) TC7SZ04FU (TE85R)
IC218 (2/2) TC7SZ04FU (TE85R)
IC219 (1/2) TC7SZ04FU (TE85R)
IC219 (2/2) TC7SZ04FU (TE85R)
IC220 (1/2) TC7SZ04FU (TE85R)
IC220 (2/2) TC7SZ04FU (TE85R)
IC221 (1/2) TC7SZ04FU (TE85R)
IC221 (2/2) TC7SZ04FU (TE85R)
RN5VD28AA-TL-EA
CPU_BUS
CPU-CLK
CPU-GND
CPU-BUS (0)
CPU-BUS (1)
CPU-BUS (2)
CPU-BUS (3)
CPU-BUS (4)
CPU-BUS (5)
CPU-BUS (6)
CPU-BUS (7) -in/out
ADDR (0) -in
ADDR (1) -in
ADDR (2) -in
ADDR (3) -in
ADDR (4) -in
RST-LB
RST-RET
RST-EXT
PLD-Reconfig SDI -in
XRESET-in
XREAD-en-in
XWRIGHT-en-in
XCS (CePROMPLD) -in
RESET
RESET-LB
RESET-RET
RESET-EXT
003.004
XRD
XWR
CS_PLD
FIBER_CONNECT
SMPTE-424M-1.31ms
EMERGENCY_A
MAIN_A_LOCKED
EMERGENCY_B
MAIN_B_LOCKED
RET_ERROR
RET_LOCKED
EXT_SDI_NOSIGNAL
EXT_SDI_LOCKED
EXT_SDI_SD-HD
EXT_VBS_NOSIGNAL
EXT_VBS_NTSC/PAL
RESET-LD
FIBER/COAX
DUAL/1.5G
LB_ENA
LD_ON
TODD-1001
RST-LB
RST-RET
RST-EXT
RET_ON
EXT_FIG/EXT_VBS
EXT_SDT_ON
SPARE1
SPARE2
SPARE3
SPARE4
SPARE5
SPARE6
SPARE7
SPARE8
FIB_CNT
TSS/131
EMR_A
MA_LOCK
EMR_B
MB_LOCK
RET_ENA
RET_LOCK
SDI_NOSIG
SDI_LOCK
SDT_ENA
SDI_SD-HD
VBS_NOSIG
VBS_N/PAL
FIB_CK
DUAL/1.5G
LB_ENA
LB_ENA
LD_ON
TODD-1001
RST-LB
RST-RET
RST-EXT
RET_ON
EXT_FIG/VBS
SDT_ON
SP1
SP2
SP3
SP4
SP5
SP6
SP7
SP8
JTAG_BUS
PLD-Done
MAIN 74M
TP203
MAIN F
MAIN H
SDI-74CK-in
CK-GND
Audio (TX) -64FS (CK) -in
Audio (TX) -LRCK (FS) -in
Audio (TX) -1/2-in
Audio (TX) -3/4-in
Audio (TX) -5/6-in
Audio (TX) -7/8-in
700Pmate-TX (toCCU) -in
CCD_AGM
AU-64FS
AU-LRCK
AUTX-12
AUTX-34
AUTX-56
AUTX-78
MAIN-A-Y (0) -in
MAIN-A-Y (1)
MAIN-A-Y (2)
MAIN-A-Y (3)
MAIN-A-Y (4)
MAIN-A-Y (5)
MAIN-A-Y (6) -in
MAIN-A-Y (7)
MAIN-A-C (0) -in
MAIN-A-C (1)
MAIN-A-C (2)
MAIN-A-C (3)
MAIN-A-C (4)
MAIN-A-C (5)
MAIN-A-C (6)
MAIN-A-C (7) -in
MAIN-A-C (8) -in
MAIN-A-C (9) -in
MAIN-B-Y (0) -in
MAIN-B-Y (1)
MAIN-B-Y (2)
MAIN-B-Y (3)
MAIN-B-Y (4)
MAIN-B-Y (5)
MAIN-B-Y (6) -in
MAIN-B-Y (7)
MAIN-B-C (0) -in
MAIN-B-C (1)
MAIN-B-C (2)
MAIN-B-C (3)
MAIN-B-C (4)
MAIN-B-C (5)
MAIN-B-C (6)
MAIN-B-C (7) -in
MAIN-B-C (8) -in
MAIN-B-C (9) -in
CLK2/LVDSCLK2+ [J15]
CLK3/LVDSCLK2- [J16]
IO240/LVDS57+ [E12]
IO229/LVDS57- [F12]
IO228/LVDS55+ [F13]
IO227/LVDS59+/DQ0R4 [E13]
IO226/LVDS63+/DQ0R [H13]
IO225/LVDS63- [J13]
IO224/LVDS65+ [L13]
IO223/LVDS65- [M13]
IO222/LVDS70+ [N13]
IO221/LVDS70- [N12]
IO202/VREF0B3 [E14]
IO201/LVDS55+ [F14]
IO200/LVDS59- [G14]
IO199/LVDS62+ [H14]
IO198/VREF1B3 [J14]
IO197 [L14]
IO196/LVDS67+/DQ1R2 [M14]
IO195/LVDS72+/DQ1R4 [N14]
IO194/LVDS72+/DQ1R5 [P14]
IO168/LVDS52+ [D15]
IO167/LVDS53+/DQ0R1 [E15]
IO166/LVDS54+/DQ0R3 [F15]
IO165/LVDS58+ [G15]
IO164/LVDS62+ [H15]
IO163/PLL2_OUT+ [K15]
IO162/LVDS64+ [L15]
IO161/LVDS67+/DQ1R1 [M15]
IO160/LVDS69+ [N15]
IO159/DPCLK5-/DQ1R [P15]
IO158/LVDS72+/DQ1R7 [N15]
IO123/LVDS52+ [D16]
IO122/LVDS53+/DQ0R2 [E16]
IO121/LVDS54+ [F16]
IO120/LVDS58- [G16]
IO119/LVDS61+ [H16]
IO118/PLL2_OUT+ [K16]
IO117/LVDS64+/DM1R [L16]
IO116/DQ1R0 [M16]
IO115/LVDS69+ [N16]
IO114/VREF2B3 [P16]
IO113/LVDS73+ [R16]
IO112/LVDS75+ [T16]
IO73/LVDS51+ [C17]
IO72/LVDS51- [D17]
IO71/DPCLK4-/DQ5R [E17]
IO70/LVDS56+ [F17]
IO69/LVDS60+/DQ0R5 [G17]
IO68/LVDS61+ [H17]
IO67/LVDS66+ [L17]
IO66/LVDS68+/DQ1R3 [M17]
IO65/LVDS71+ [N17]
IO64/DQ1R6 [P17]
IO63/LVDS74+ [R17]
IO62/LVDS75- [T17]
IO25/DQ0R0 [D18]
IO24/LVDS56+ [E18]
IO23/LVDS60+/DQ0R6 [G18]
IO22/DQ0R7 [H18]
IO21/LVDS66+ [L18]
IO20/LVDS68+ [M18]
IO19/LVDS71+ [N18]
IO18/LVDS74+ [R18]
LB-Y7
LB-Y6
LB-Y5
LB-Y4
LB-Y3
LB-Y2
LB-Y1
LB-Y0
LB-C7
LB-C6
LB-C5
LB-C4
LB-C3
LB-C2
LB-C1
LB-C0
LA-Y7
LA-Y6
LA-Y5
LA-Y4
LA-Y3
LA-Y2
LA-Y1
LA-Y0
LA-C7
LA-C6
LA-C5
LA-C4
LA-C3
LA-C2
LA-C1
LA-C0
MAIN_CLK74
LAB-CLK74
MR-Y8
MR-Y7
MR-Y6
MR-Y5
MR-Y4
MR-Y3
MR-Y2
MR-Y1
MR-Y0
MR-C8
MR-C7
MR-C6
MR-C5
MR-C4
MR-C3
MR-C2
MR-C1
MR-C0
MA-Y8
MA-Y7
MA-Y6
MA-Y5
MA-Y4
MA-Y3
MA-Y2
MA-Y1
MA-Y0
MA-C8
MA-C7
MA-C6
MA-C5
MA-C4
MA-C3
MA-C2
MA-C1
MA-C0
MA-F
MA-H
MB-Y8
MB-Y7
MB-Y6
MB-Y5
MB-Y4
MB-Y3
MB-Y2
MB-Y1
MB-Y0
MB-C8
MB-C7
MB-C6
MB-C5
MB-C4
MB-C3
MB-C2
MB-C1
MB-C0

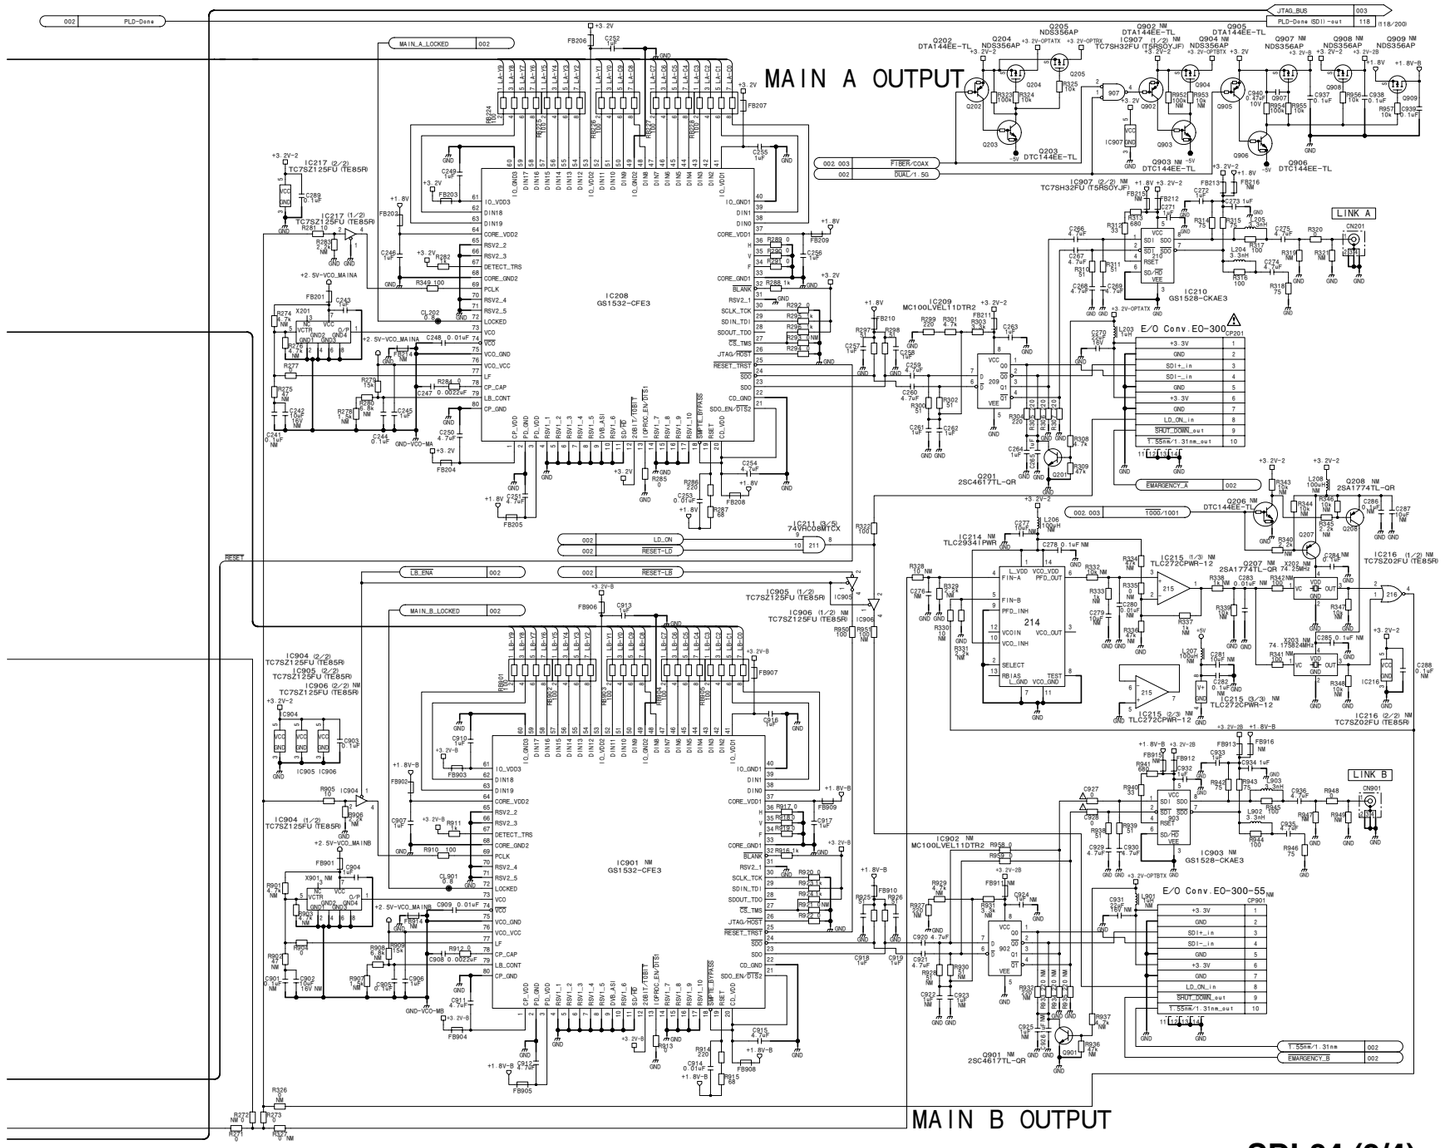


SDI-84 (2/4)

BOARD NO. 1-865-930-12, 13


HDC-1500_SDI-84_012_2

RET INPUT

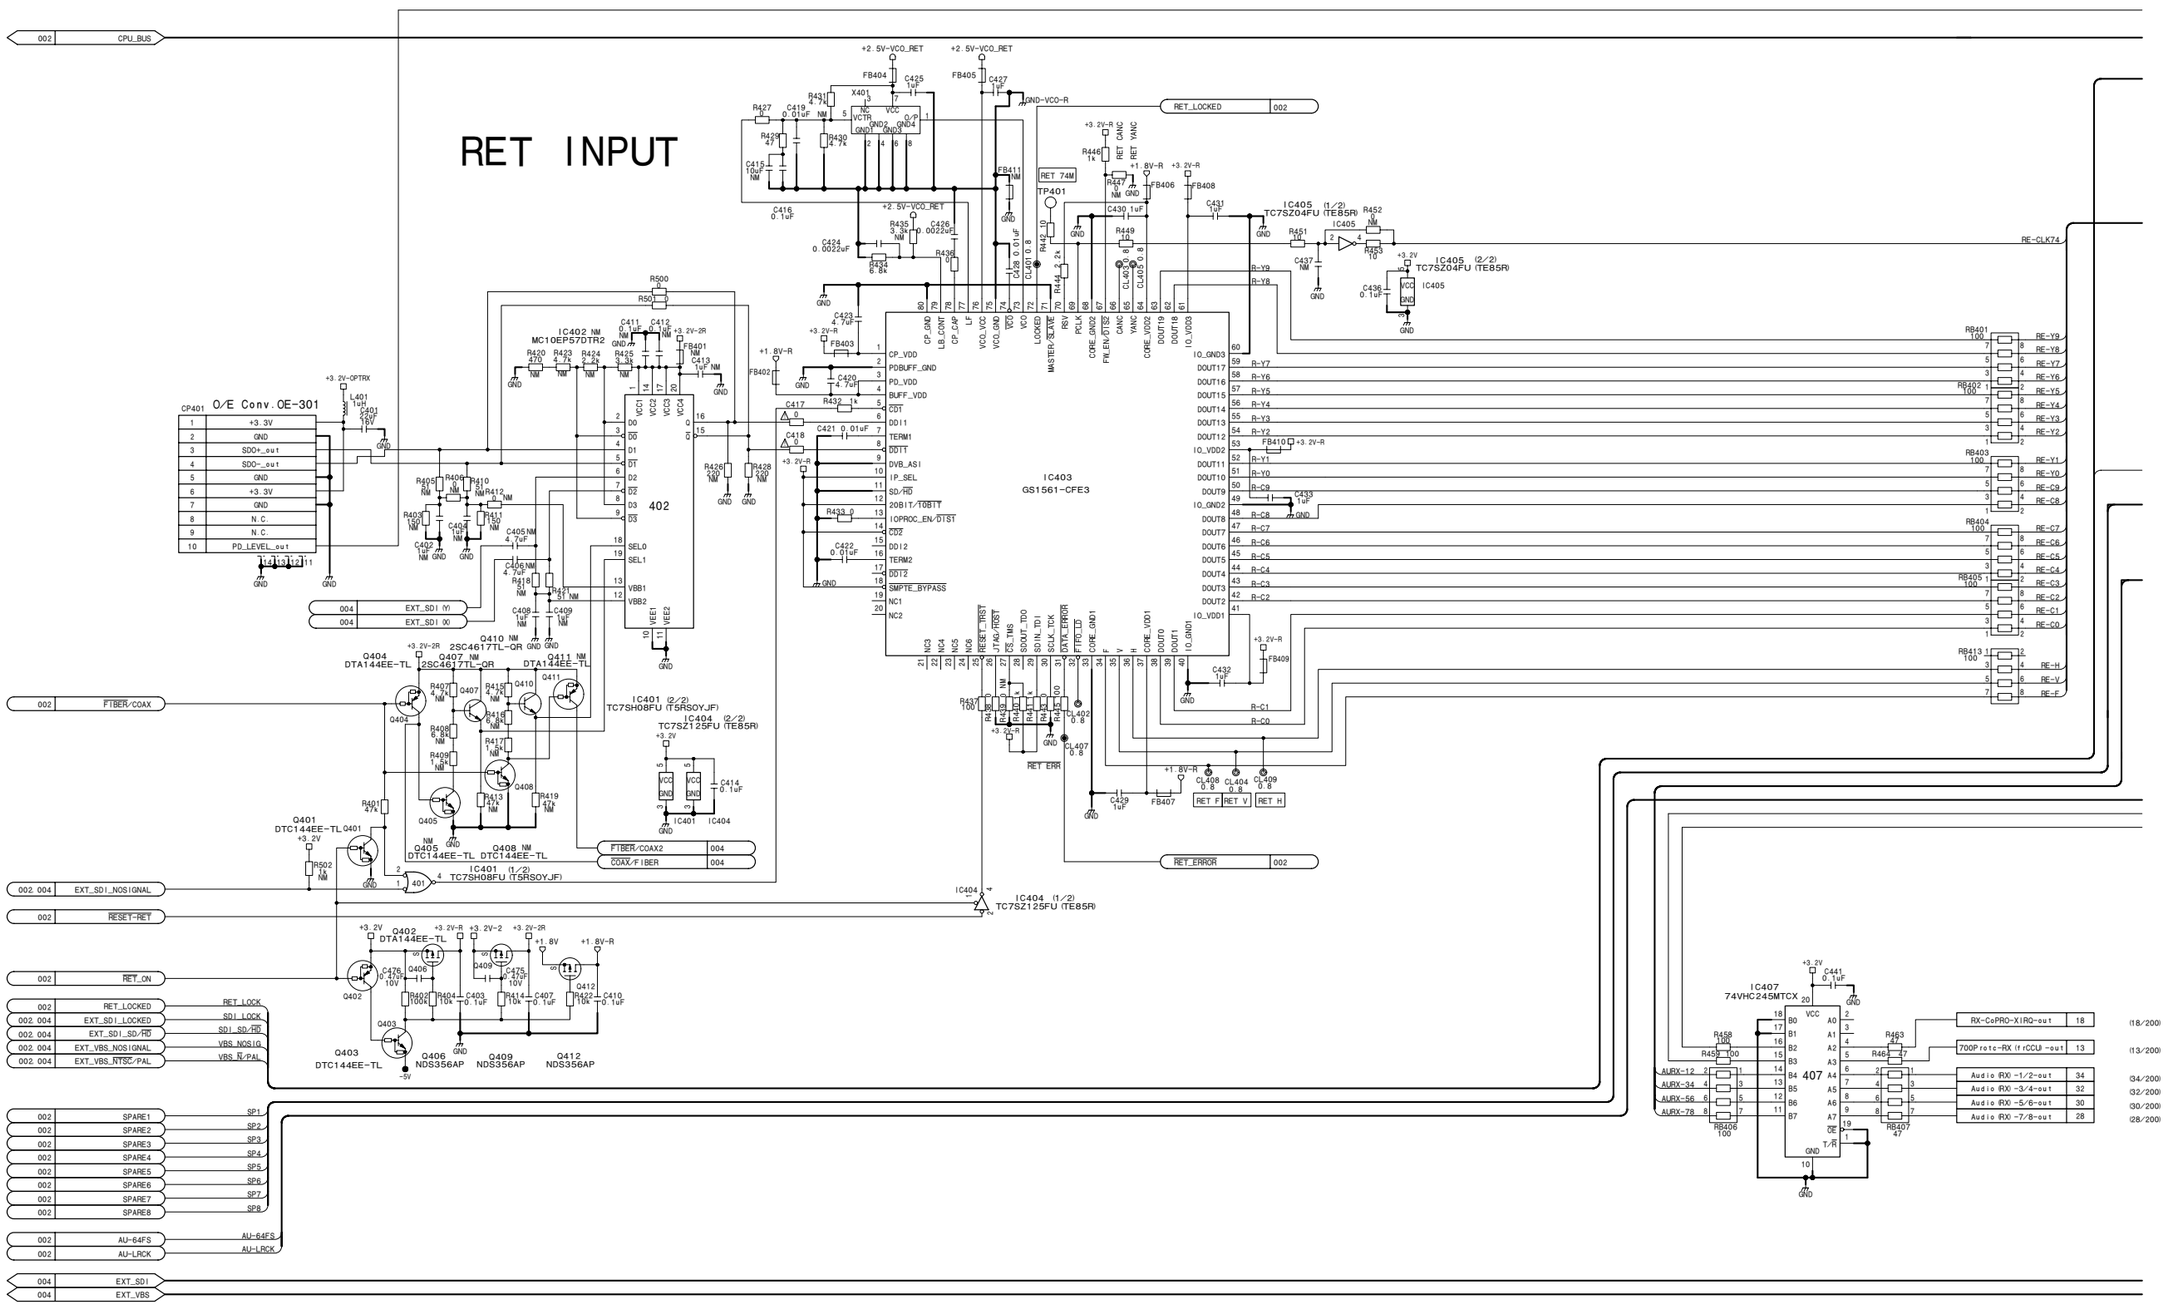
002 CPU_BUS
RET_LOCKED 002
RET_ERROR 002
RET 74M
TP401
X401
IC403 GS1561-CFE3
IC405 (1/2) TC7SZ04FU (TE85R)
IC405 (2/2) TC7SZ04FU (TE85R)
IC401 (2/2) TC7SH08FU (T5RSOYJF)
IC404 (2/2) TC7SZ125FU (TE85R)
IC401 (1/2) TC7SH08FU (T5RSOYJF)
IC404 (1/2) TC7SZ125FU (TE85R)
IC402 NM MC10EP57DTR2
IC407 74VHC245MTCX
CP401 O/E Conv. OE-301
+3.2V-OPTRX
+2.5V-VCO_RET
+3.2V-R
+1.8V-R
+3.2V-2R
+3.2V-2
+1.8V
+3.2V
GND-VCO-R
RET_LOCK
SDI_LOCK
SDI_SD/HD
VBS_NOSIG
VBS_N/PAL
SP1
SP2
SP3
SP4
SP5
SP6
SP7
SP8
AU-64FS
AU-LRCK
RET_ERR
RET_F
RET_V
RET_H
RET_CAN
RET_YANC
RE-CLK74
RE-Y9
RE-Y8
RE-Y7
RE-Y6
RE-Y5
RE-Y4
RE-Y3
RE-Y2
RE-Y1
RE-Y0
RE-C9
RE-C8
RE-C7
RE-C6
RE-C5
RE-C4
RE-C3
RE-C2
RE-C1
RE-C0
RE-H
RE-V
RE-F
R-Y9
R-Y8
R-Y7
R-Y6
R-Y5
R-Y4
R-Y3
R-Y2
R-Y1
R-Y0
R-C9
R-C8
R-C7
R-C6
R-C5
R-C4
R-C3
R-C2
R-C1
R-C0
AURX-12
AURX-34
AURX-56
AURX-78
RX-CoPRO-XIRQ-out 18 (18/200)
700Protc-RX (fCCU) -out 13 (13/200)
Audio RX0 -1/2-out 34 (34/200)
Audio RX0 -3/4-out 32 (32/200)
Audio RX0 -5/6-out 30 (30/200)
Audio RX0 -7/8-out 28 (28/200)
EXT_SDI (Y)
EXT_SDI (C)
FTBER/COAX
EXT_SDI_NOSIGNAL
RESET-RET
RET_ON
RET_LOCKED
EXT_SDI_LOCKED
EXT_SDI_SD/HD
EXT_VBS_NOSIGNAL
EXT_VBS_NTSC/PAL
SPARE1
SPARE2
SPARE3
SPARE4
SPARE5
SPARE6
SPARE7
SPARE8
AU-64FS
AU-LRCK
EXT_SDI
EXT_VBS
FTBER/COAX2 004
COAX/FIBER 004

SDI-84 (3/4)
SUFFIX: -12, 13

COMMAND DEMUX
PROMPTER DECODE

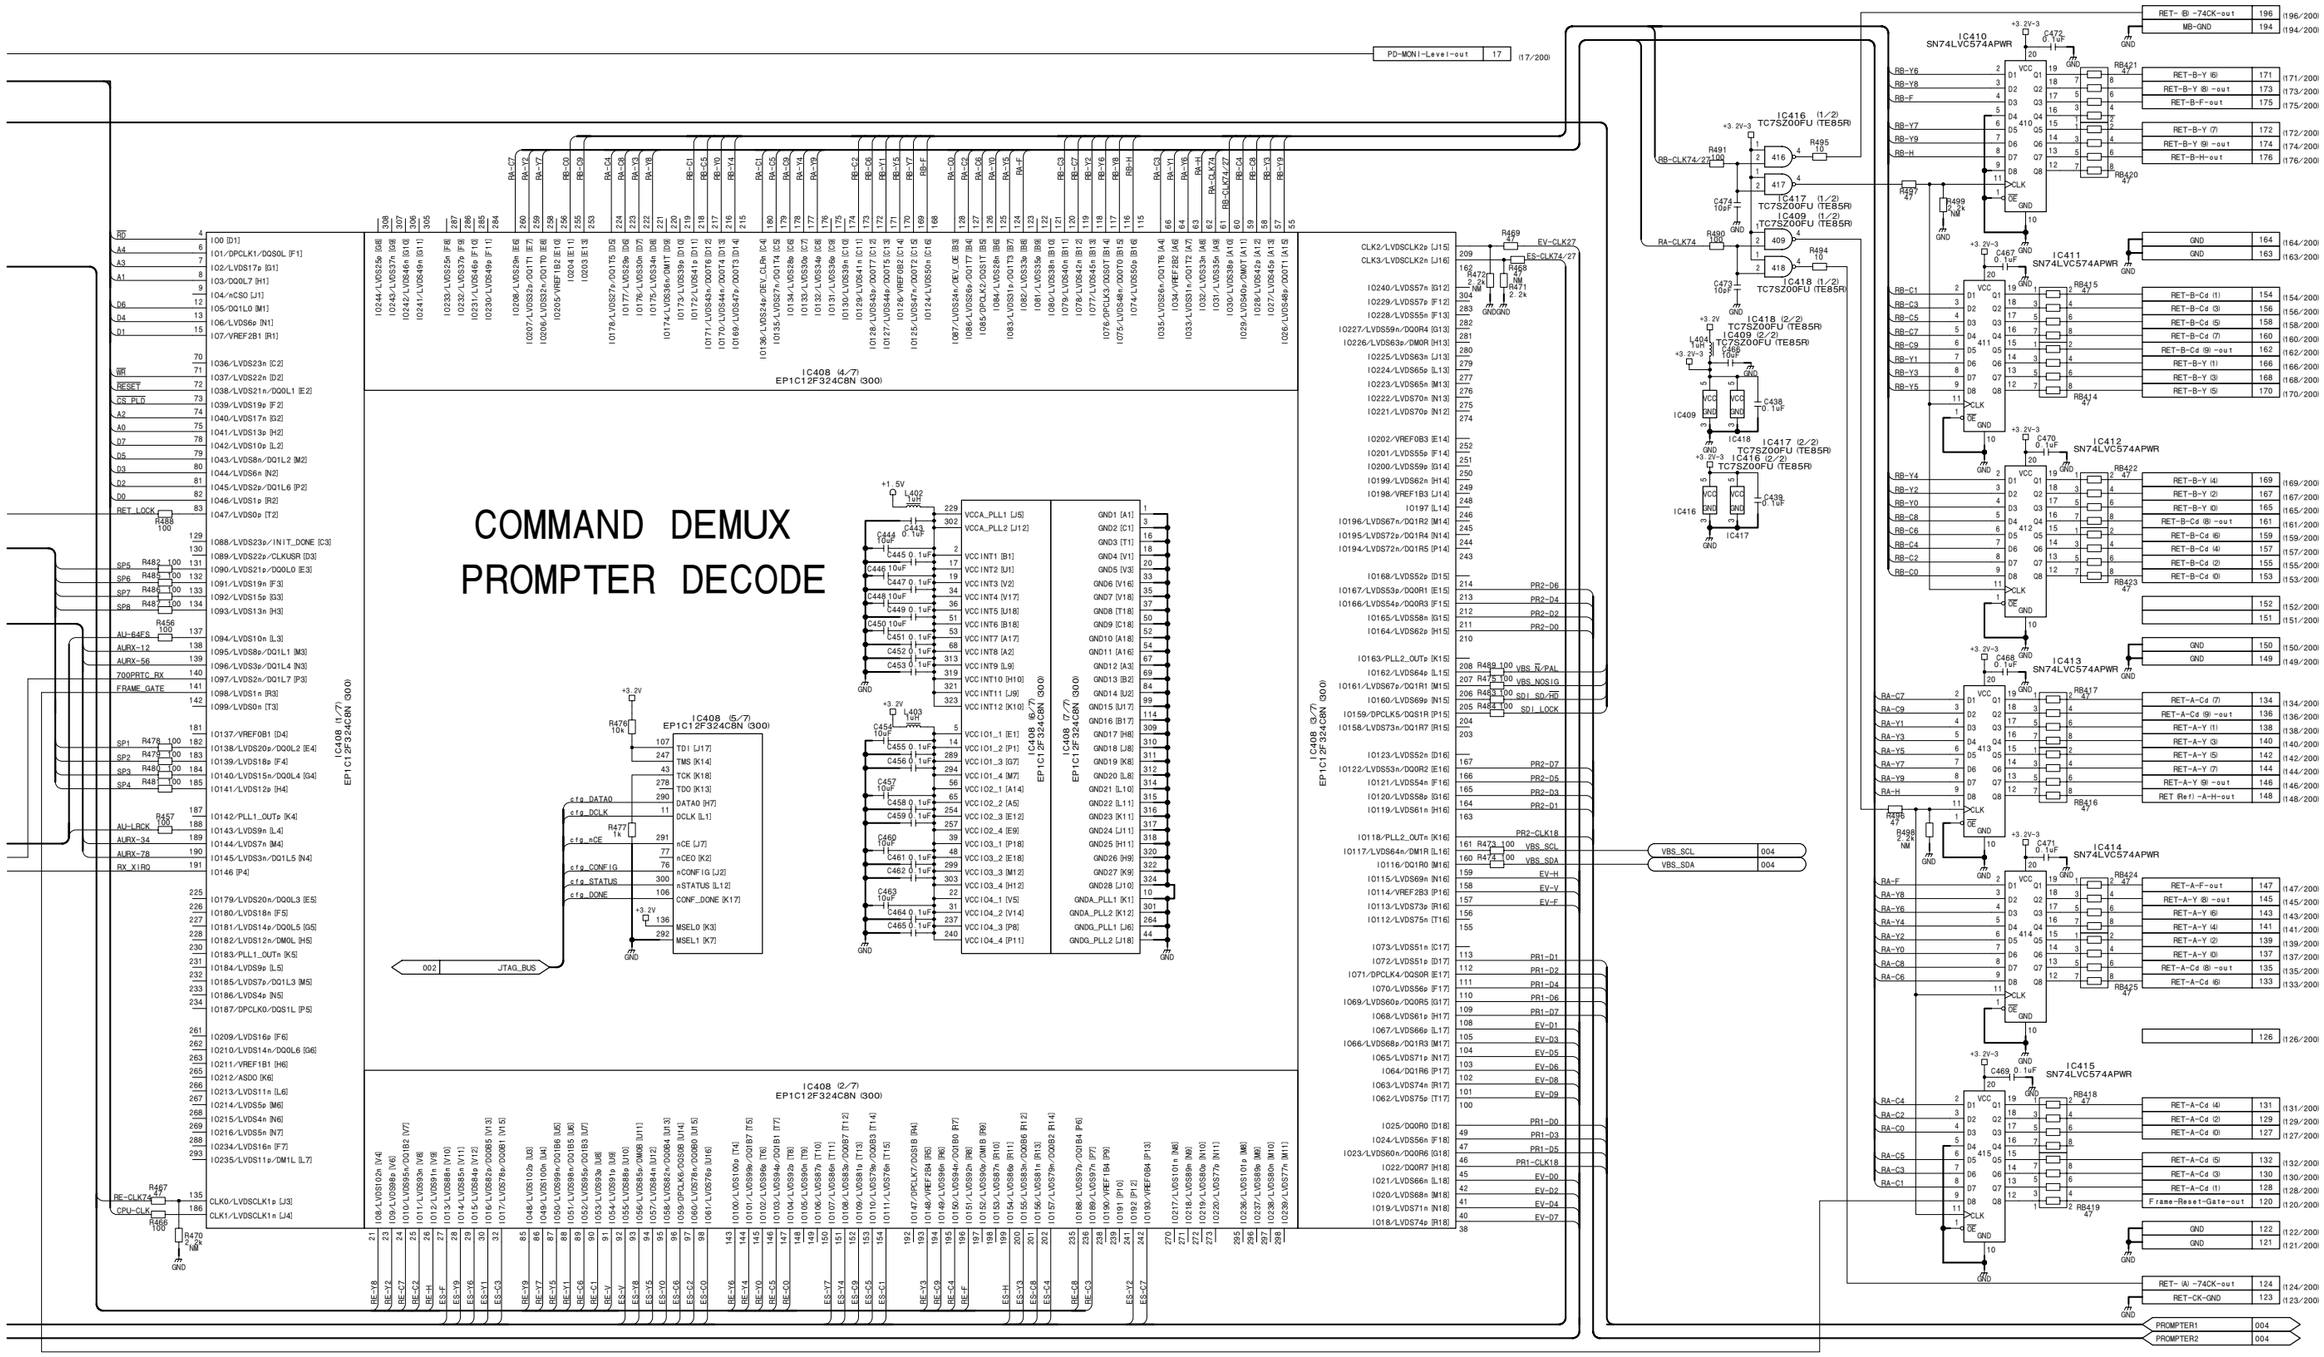

SDI-84 (3/4)

BOARD NO. 1-865-930-12, 13

HDC-1500_SDI-84_012_3

EXT HD/SD-SDI INPUT

EXT VIDEO IN

EXT_SDI_NOSIGNAL 002, 003
EXT_SDI_ERROR 002
EXT_SDI_SD/HD 002, 003
EXT_SDI_LOCKED 002, 003
EXT_SDI 003
EXT_VBS_NTSC/PAL 002, 003
EXT_VBS 003
EXT_VBS_NOSIGNAL 002, 003

EXT VBS INPUT

IC704 ML86V7666TBZ03A

IC703 (1/2) TC7SH00FU (T5RSOYJF)

PROMPTER1 OUTPUT


PROMPTER2 OUTPUT

Prompter(X) -out 12 (12/20)
Prompter(Y) -out 14 (14/20)

SDI-84 (4/4)
BOARD NO. 1-865-930-12, 13
HDC-1500_SDI-84_013_4


SDI-84C (1/4)
SUFFIX: -13

SDI-84C (1/4)
SUFFIX: -13

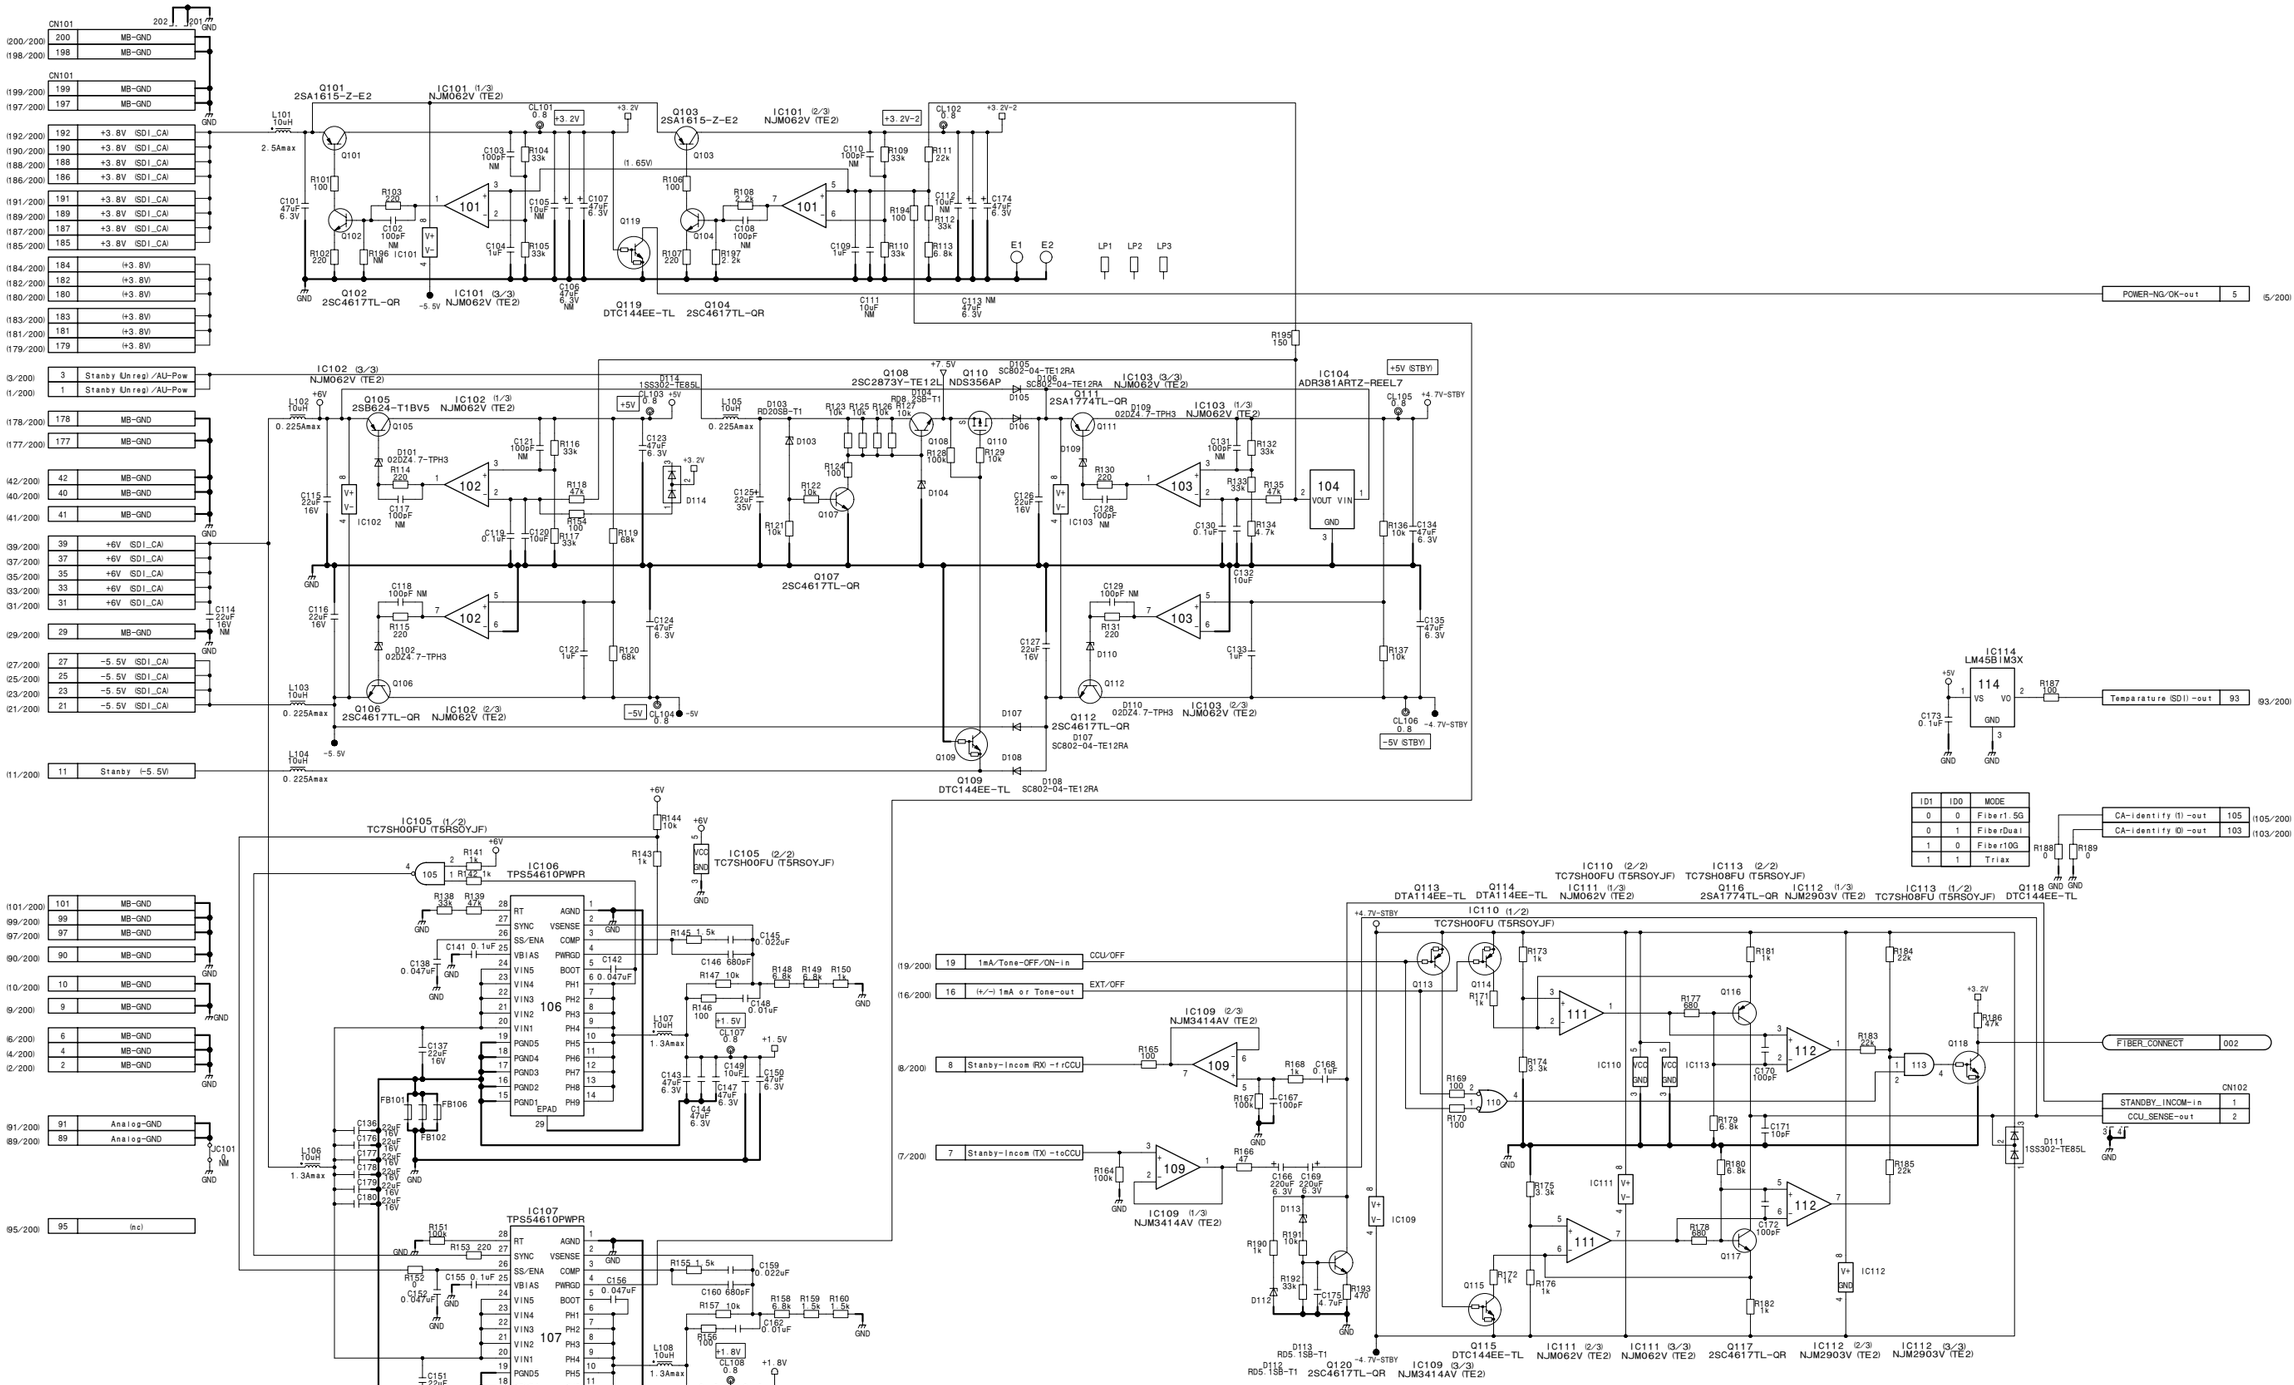

SDI-84C (1/4)
BOARD NO. 1-865-930-13
HDC-1500_SDI-84C_001_1

SDI-84C (2/4) **SUFFIX: -13**

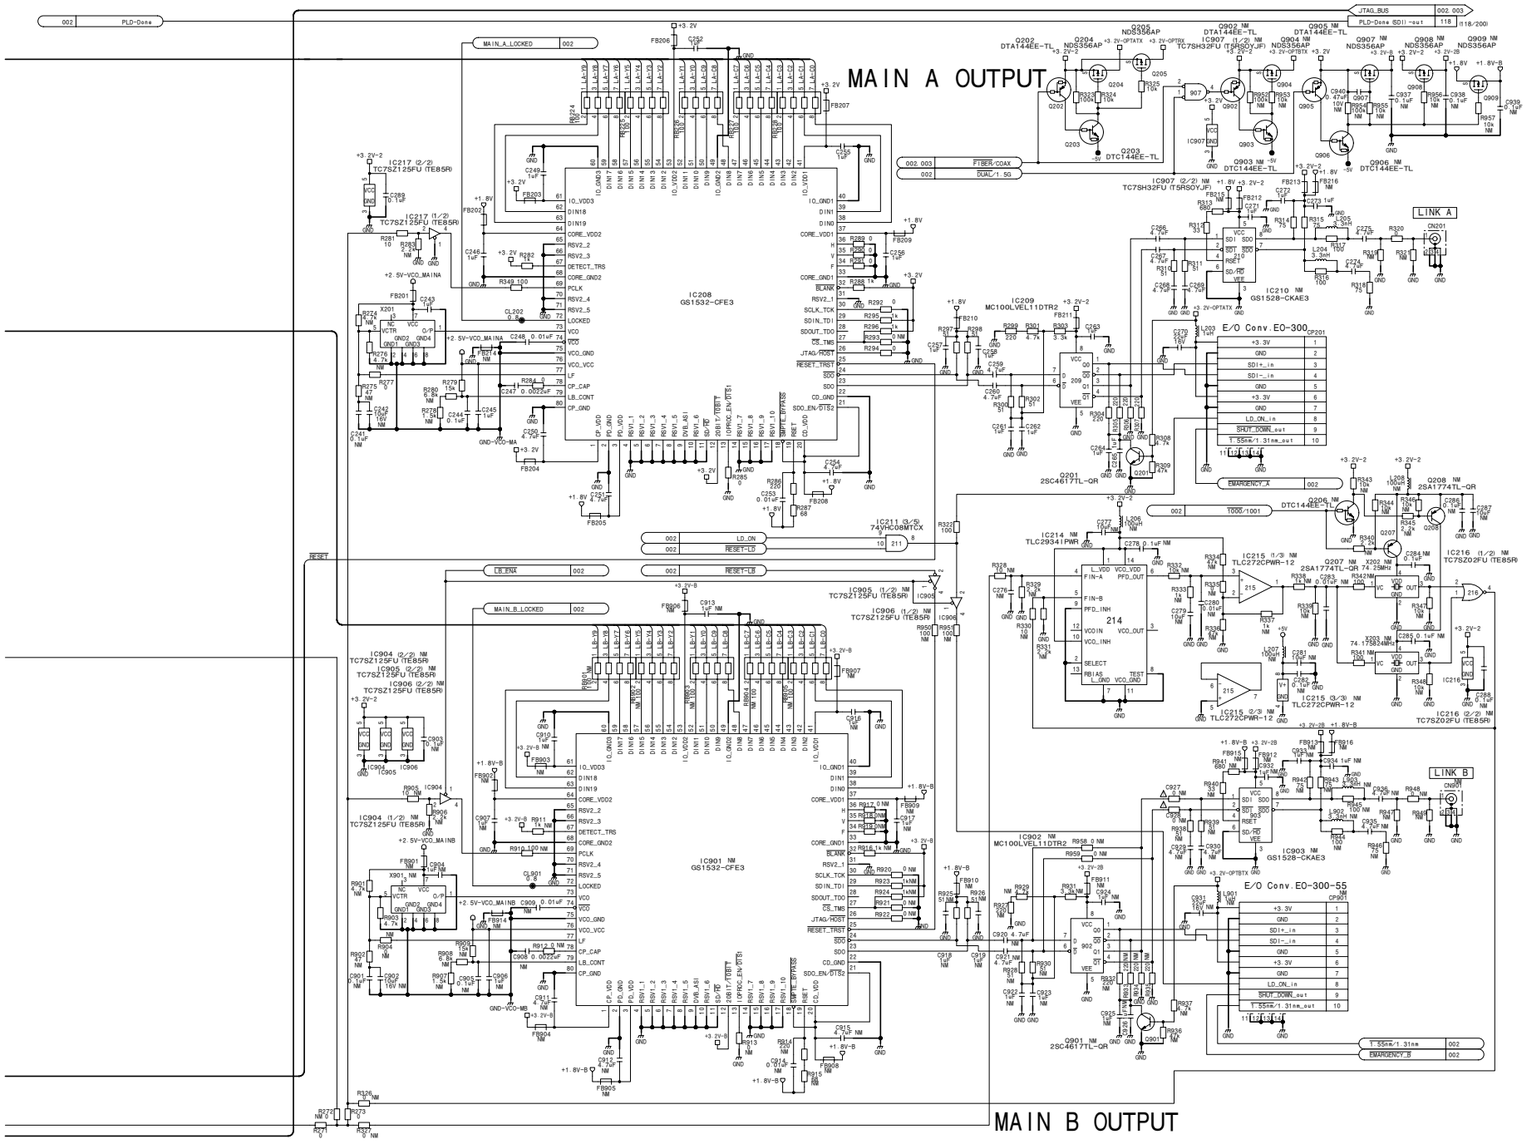


SDI-84C (2/4)


BOARD NO. 1-865-930-13

HDC-1500_SDI-84C_001_2

RET INPUT

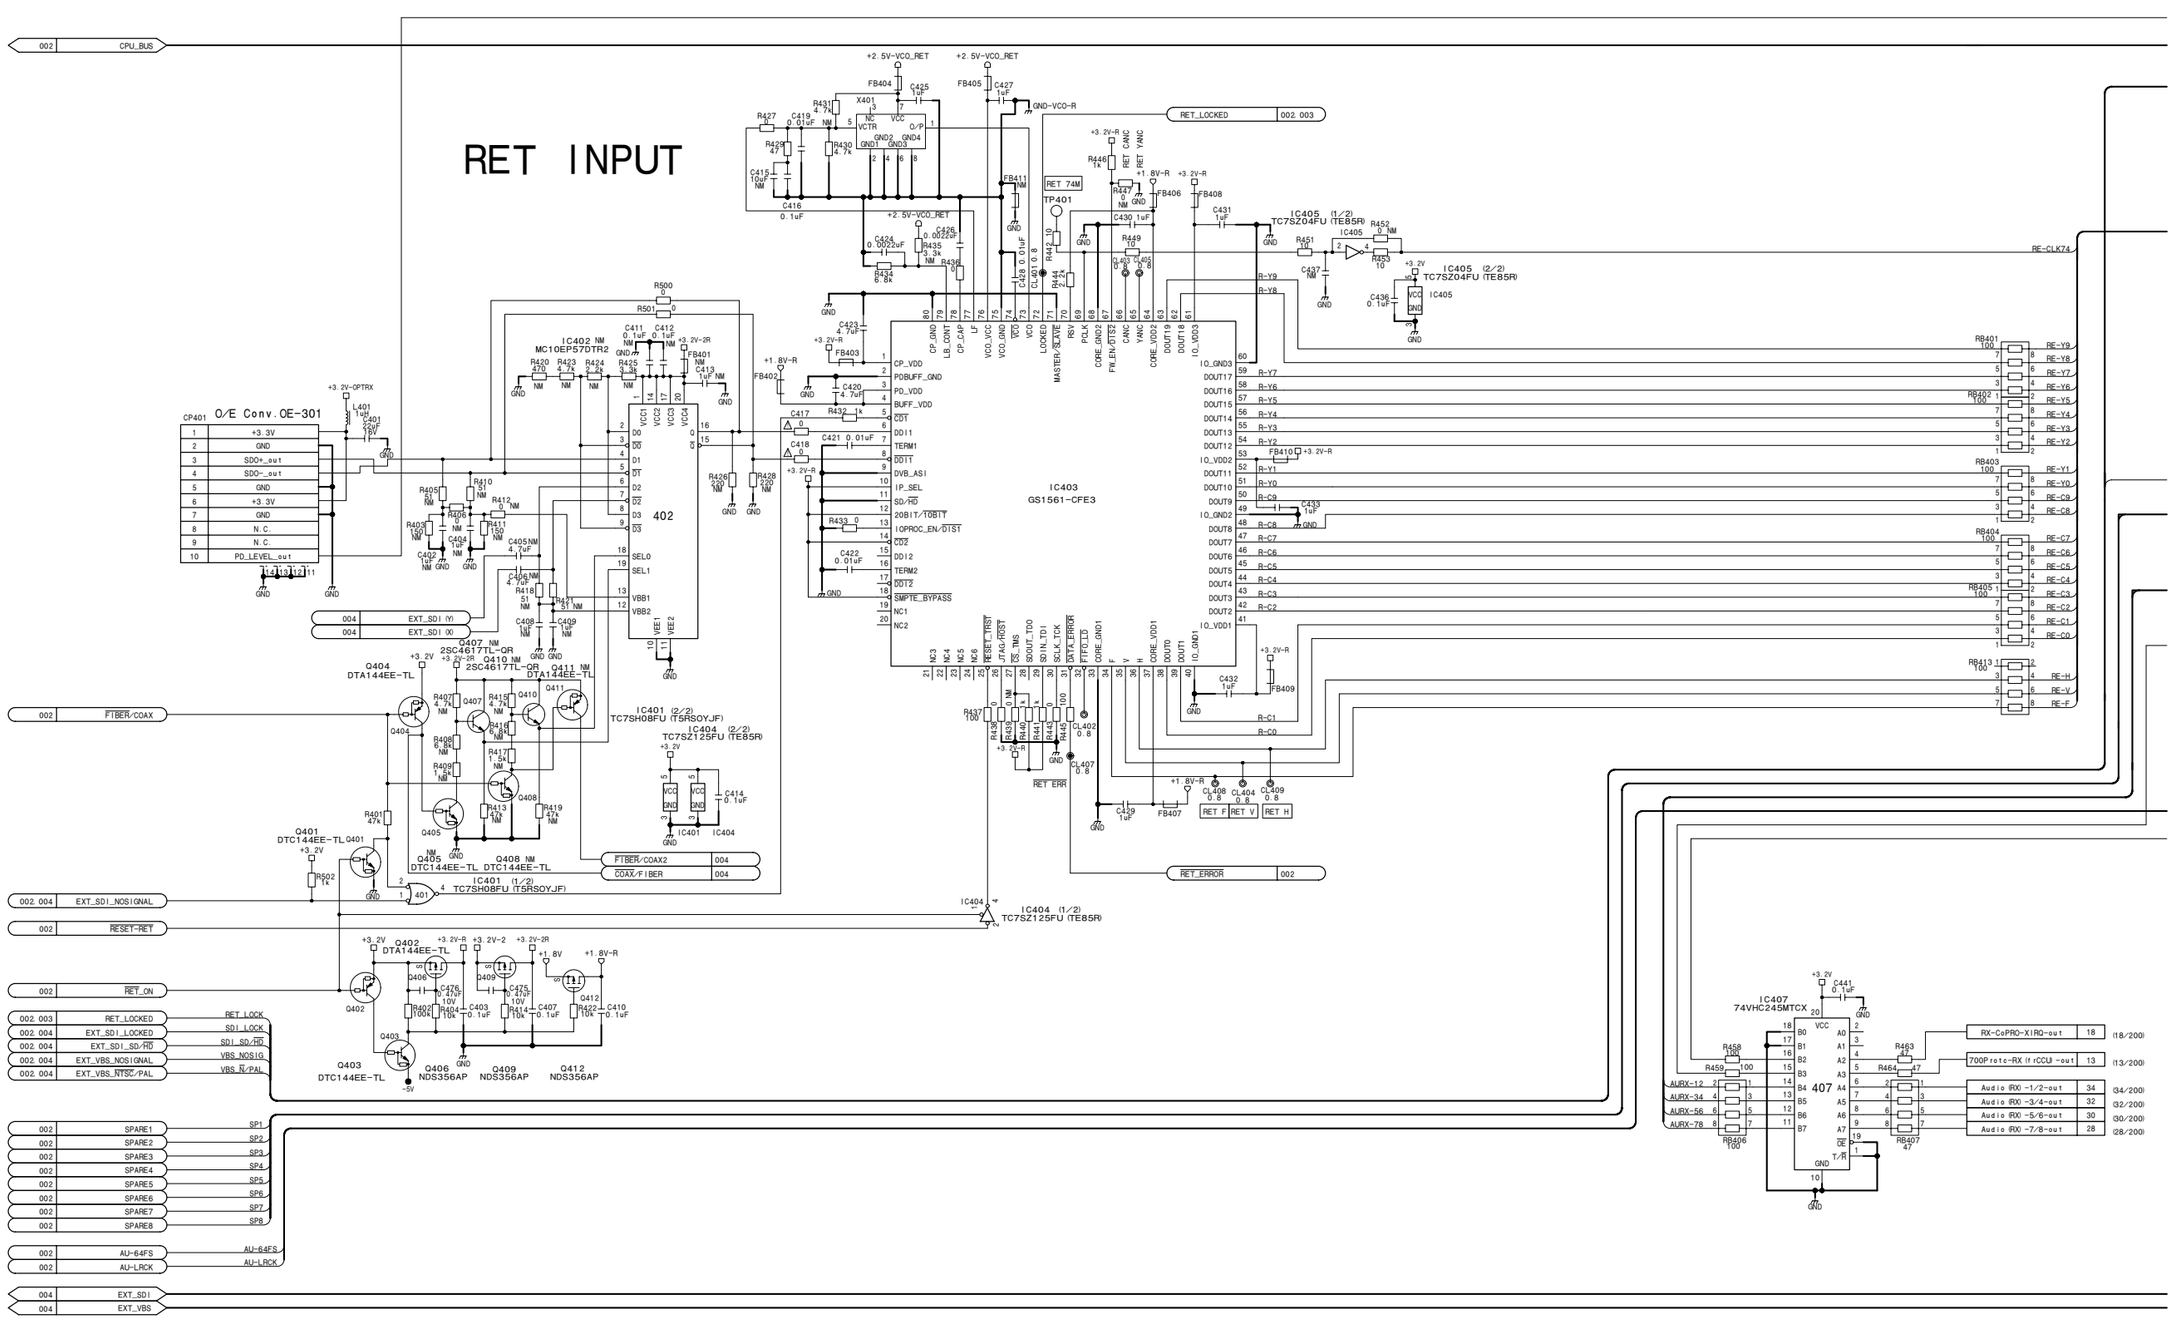
002 CPU_BUS
RET_LOCKED 002.003
RET_ERROR 002
RET 74M
TP401
IC403 GS1561-CFE3
IC405 (1/2) TC7SZ04FU (TE85R)
IC405 (2/2) TC7SZ04FU (TE85R)
IC401 (2/2) TC7SH08FU (TE5RSOYJF)
IC404 (2/2) TC7SZ125FU (TE85R)
IC401 (1/2) TC7SH08FU (TE5RSOYJF)
IC404 (1/2) TC7SZ125FU (TE85R)
IC407 74VHC245MTCX
IC402 NM MC10EPS7DTR2
CP401 O/E Conv. OE-301
+3.3V
SDO+_out
SDO-_out
N.C.
PD_LEVEL_out
EXT_SDI (Y)
EXT_SDI (X)
FTBER/COAX
RESET-RET
RET_ON
RET_LOCKED
EXT_SDI_LOCKED
EXT_SDI_SD/HD
EXT_VBS_NOSIGNAL
EXT_VBS_NTSC/PAL
SPARE1
SPARE2
SPARE3
SPARE4
SPARE5
SPARE6
SPARE7
SPARE8
AU-64FS
AU-LRCK
EXT_SDI
EXT_VBS
FTBER/COAX2
COAX-FIBER
RET_LOCK
SDI_LOCK
SDI_SD/HD
VBS_NOSIG
VBS_N/PAL
RX-CoPRO-XIRQ-out
700Protc-RX (rCCU -out
Audio IR00 -1/2-out
Audio IR00 -3/4-out
Audio IR00 -5/6-out
Audio IR00 -7/8-out

COMMAND DEMUX PROMPTER DECODE

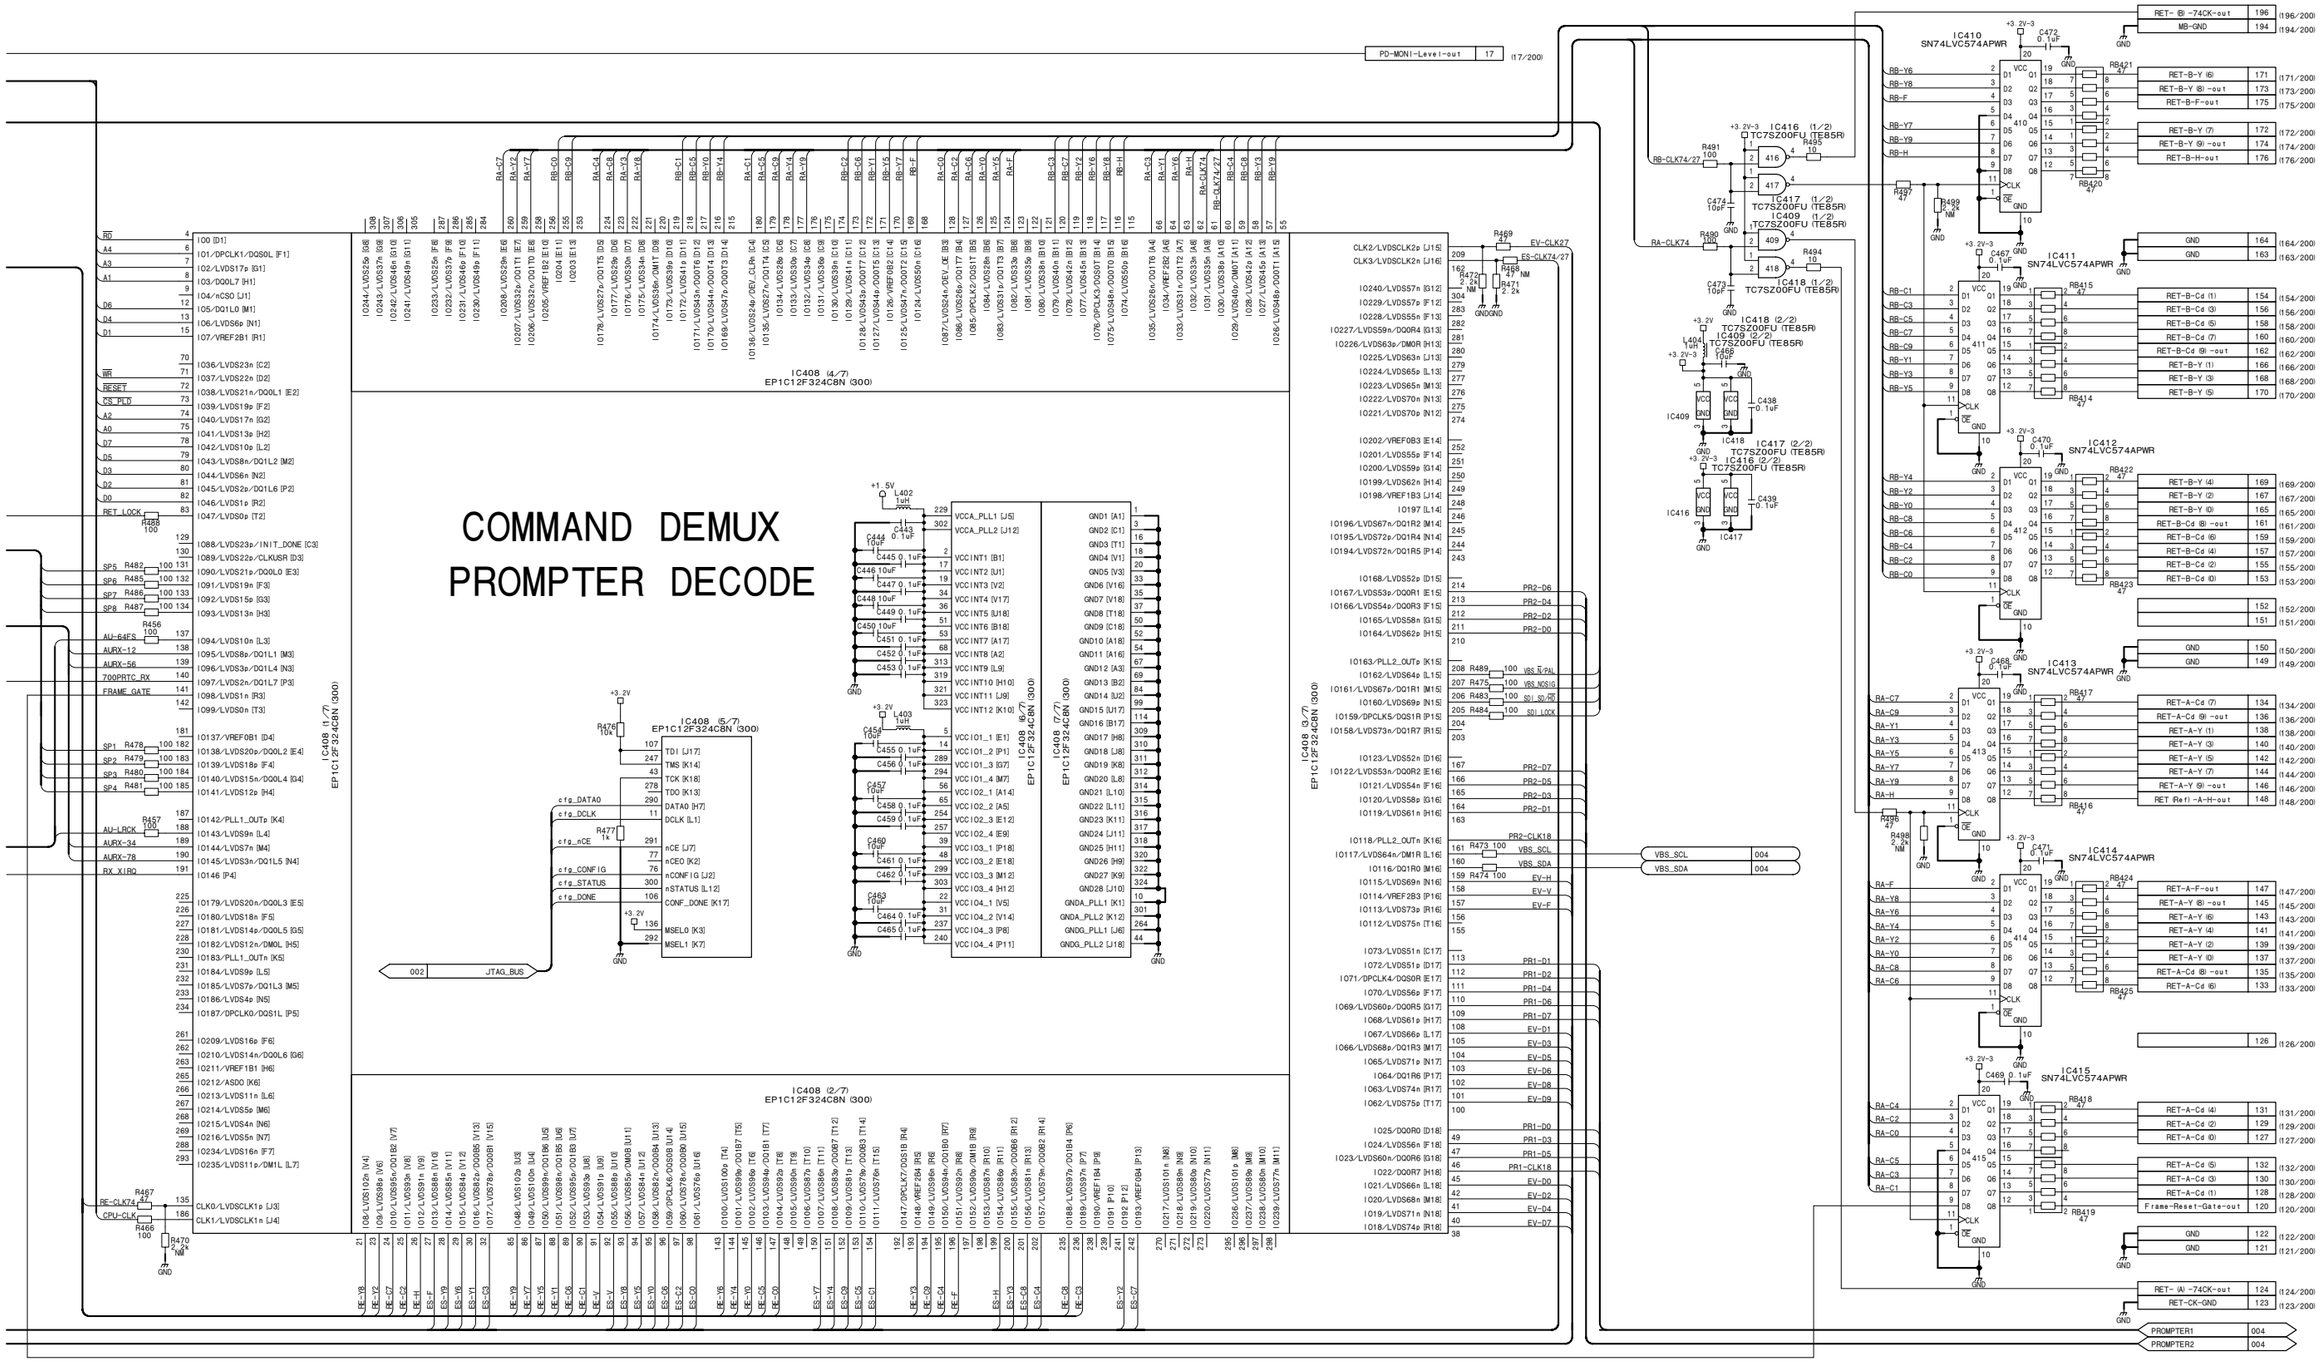

SDI-84C (3/4)
BOARD NO. 1-865-930-13
HDC-1500_SDI-84C_001_3

SDI-84C (4/4)
SUFFIX: -13

EXT HD/SD-SDI INPUT

EXT VIDEO IN

Q601 NM 2SC5245-4/5-TL-E

Q602 NM 2SC5245-4/5-TL-E

Q603 NM 2SC4617TL-QR

Q604 NM 2SA1774TL-QR

Q605 NM 2SC4617TL-QR

Q606 NM 2SC4617TL-QR

IC601 NM GS1524-CKDE3

IC602 (1/2) NM TC7SZ125FU (TE85R)

IC603 NM MC100LVEL11DTR2

IC604 (1/2) NM TC7SH00FU (T5RSOYJF)

IC604 (2/2) NM TC7SH00FU (T5RSOYJF)

IC605 NM GS1561-CFE3

IC606 (1/2) NM TC7SZ125FU (TE85R)

IC606 (2/2) NM TC7SZ125FU (TE85R)

IC607 (2/2) NM TC7SZ04FU (TE85R)

IC607 (1/2) NM TC7SZ04FU (TE85R)

Q607 NM DTA144EE-TL

Q608 NM DTC144EE-TL

Q609 NM NDS356AP

Q610 NM DTA144EE-TL

Q611 NM DTC144EE-TL

Q612 NM NDS356AP

Q613 NM NDS356AP

Q617 NM NDS356AP

IC701 (1/2) NM TC7SH00FU (T5RSOYJF)

IC701 (2/2) NM TC7SH00FU (T5RSOYJF)

003 FIBER/COAX2
003 COAX/FIBER
002 EXT_EQ/EXT_VBS
002 EXT_SDI_ON
002 RESET-EXT
003 VBS_SCL
003 VBS_SDA
(195/200) 195 RET-27M-CK-in
(193/200) 193 MB-GND
003 PROMPTER1
003 PROMPTER2

EXT_SDI (Y) 003
EXT_SDI (X) 003

SDI LOCKED
SDI ERR
SDI H
SDI V
SDI F
ES-CLK74/27
ES-Y8
ES-Y9
ES-Y7
ES-Y6
ES-Y5
ES-Y4
ES-Y3
ES-Y2
ES-Y1
ES-Y0
ES-C9
ES-C8
ES-C7
ES-C6
ES-C5
ES-C4
ES-C3
ES-C2
ES-C1
ES-C0
ES-H
ES-V
ES-F

4-106

EXT_SDI_NOSIGNAL 002, 003
EXT_SDI_ERROR 002
EXT_SDI_SD/HD 002, 003
EXT_SDI_LOCKED 002, 003
EXT_SDI 003
EXT_VBS_NTSC/PAL 002, 003
EXT_VBS 003
EXT_VBS_NOSIGNAL 002, 003

EXT VBS INPUT

IC704 NM
ML86V7666TBZ03A

IC702 (1/3) NM NJM062V (TE2)
IC702 (2/3) NM NJM062V (TE2)
IC702 (3/3) NM NJM062V (TE2)
IC703 (2/2) TC7SH00FU (TSRSOYJF)
IC703 (1/2) TC7SH00FU (T5RSOYJF)


PROMPTER1 OUTPUT


IC801 CXD1171M-TH
IC802 AD8014ARTZ-REEL7
PROMPTER1 TP801
Prompter(X) -out 12 (12/20)
Prompter(Y) -out 14 (14/20)


PROMPTER2 OUTPUT


IC851 NM CXD1171M-TH
IC852 NM AD8014ARTZ-REEL7
PROMPTER2 TP851 NM
PROMPTER2 OUT

SDI-84C (4/4)
BOARD NO. 1-865-930-13
HDC-1500_SDI-84C_001_4

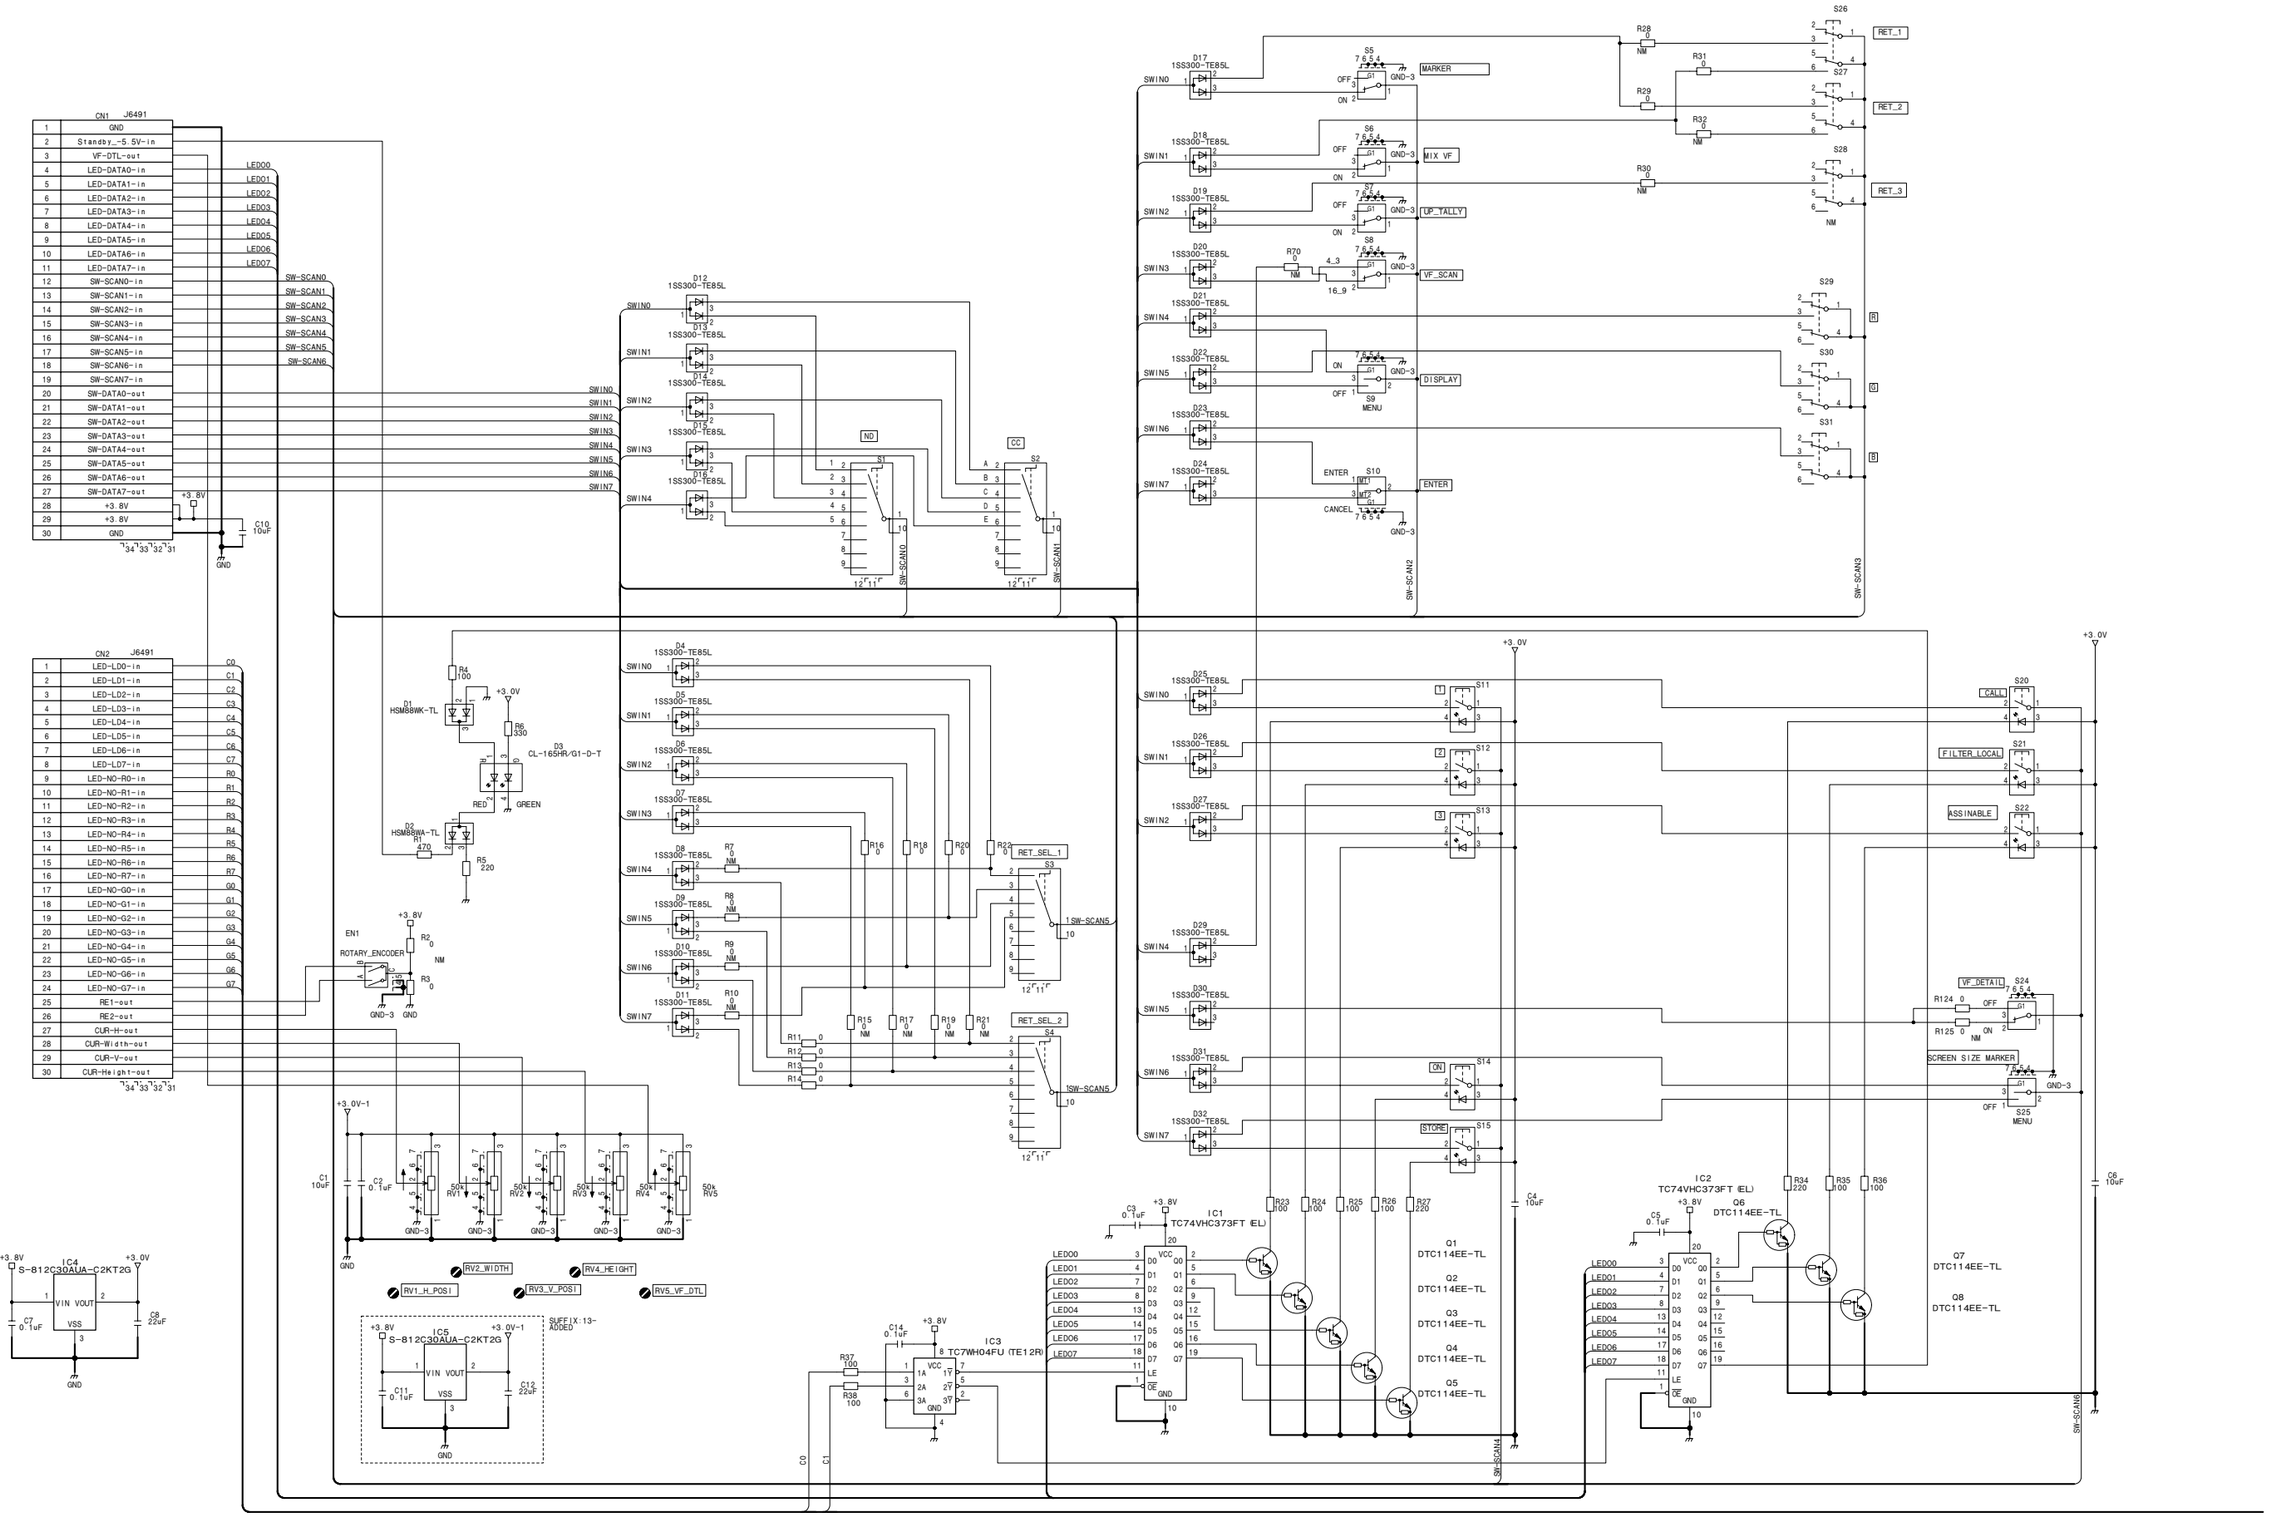
CN1 J6491
GND
Standby_-5.5V-in
VF-DTL-out
LED-DATA0-in
LED-DATA1-in
LED-DATA2-in
LED-DATA3-in
LED-DATA4-in
LED-DATA5-in
LED-DATA6-in
LED-DATA7-in
SW-SCAN0-in
SW-SCAN1-in
SW-SCAN2-in
SW-SCAN3-in
SW-SCAN4-in
SW-SCAN5-in
SW-SCAN6-in
SW-SCAN7-in
SW-DATA0-out
SW-DATA1-out
SW-DATA2-out
SW-DATA3-out
SW-DATA4-out
SW-DATA5-out
SW-DATA6-out
SW-DATA7-out
+3.8V
+3.8V
GND
CN2 J6491
LED-LD0-in
LED-LD1-in
LED-LD2-in
LED-LD3-in
LED-LD4-in
LED-LD5-in
LED-LD6-in
LED-LD7-in
LED-NO-R0-in
LED-NO-R1-in
LED-NO-R2-in
LED-NO-R3-in
LED-NO-R4-in
LED-NO-R5-in
LED-NO-R6-in
LED-NO-R7-in
LED-NO-G0-in
LED-NO-G1-in
LED-NO-G2-in
LED-NO-G3-in
LED-NO-G4-in
LED-NO-G5-in
LED-NO-G6-in
LED-NO-G7-in
RE1-out
RE2-out
CUR-H-out
CUR-Width-out
CUR-V-out
CUR-Height-out
D1 HSMS8WK-TL
D2 HSMS8WA-TL
D3 CL-165HR/G1-D-T
RED
GREEN
EN1
ROTARY_ENCODER
RV1_H_POSI
RV2_WIDTH
RV3_V_POSI
RV4_HEIGHT
RV5_VF_DTL
IC4 S-812C30AUA-C2KT2G
IC5 S-812C30AUA-C2KT2G
SUFFIX:13-ADDED
IC1 TC74VHC373FT (EL)
IC2 TC74VHC373FT (EL)
IC3 TC7WH04FU (TE12R)
Q1 DTC114EE-TL
Q2 DTC114EE-TL
Q3 DTC114EE-TL
Q4 DTC114EE-TL
Q5 DTC114EE-TL
Q6 DTC114EE-TL
Q7 DTC114EE-TL
Q8 DTC114EE-TL
MARKER
MIX VF
UP_TALLY
VF_SCAN
DISPLAY
MENU
ENTER
CANCEL
RET_1
RET_2
RET_3
R
G
B
CALL
FILTER_LOCAL
ASSINABLE
VF_DETAIL
SCREEN SIZE MARKER
STORE
RET_SEL_1
RET_SEL_2
SW-SCAN0
SW-SCAN1
SW-SCAN2
SW-SCAN3
SW-SCAN4
SW-SCAN5
SW-SCAN6
+3.0V
GND-3

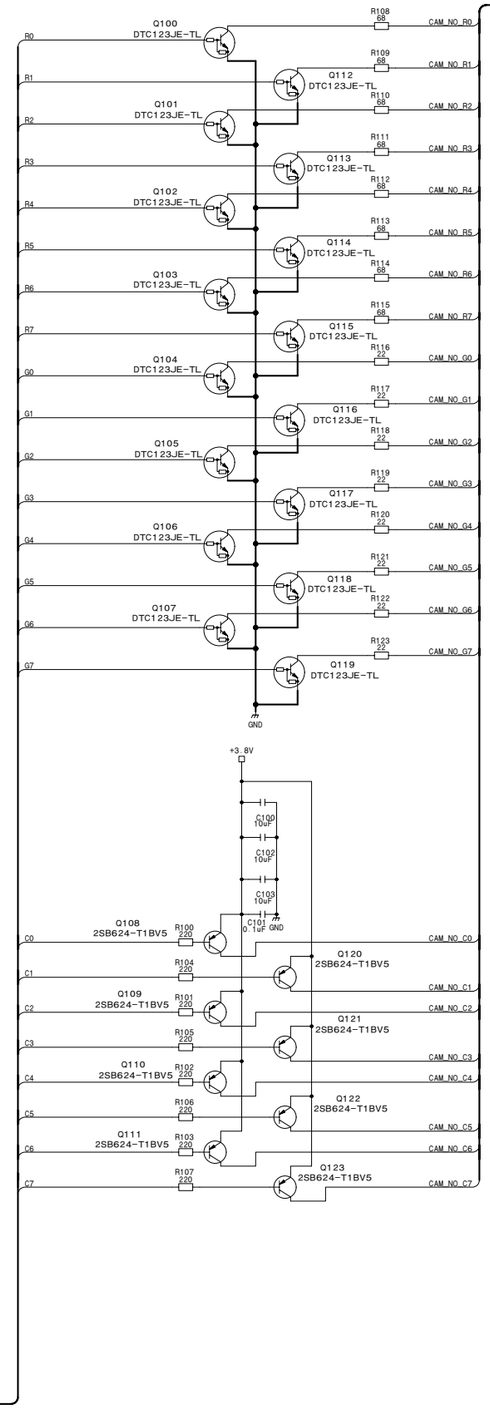


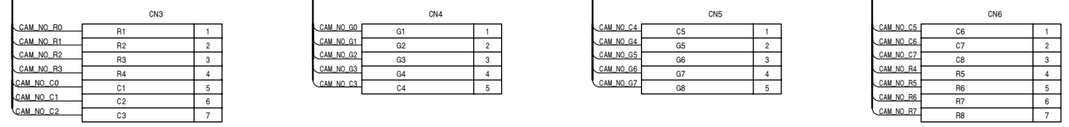




SW-1233
BOARD NO. 1-867-455-12, 13
HDC-1000_SW-1233_013_1

SW-1236, SW-1237
SUFFIX: -12 SUFFIX: -13

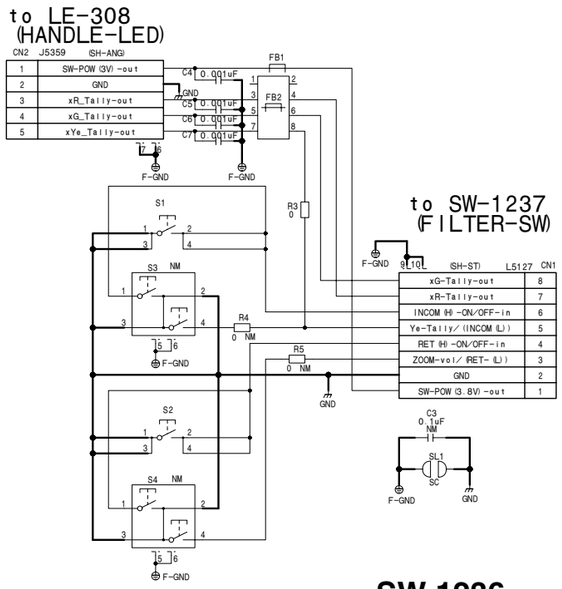


SW-1236
BOARD NO. 1-865-947-12
HDC-1500_SW-1236_001_1

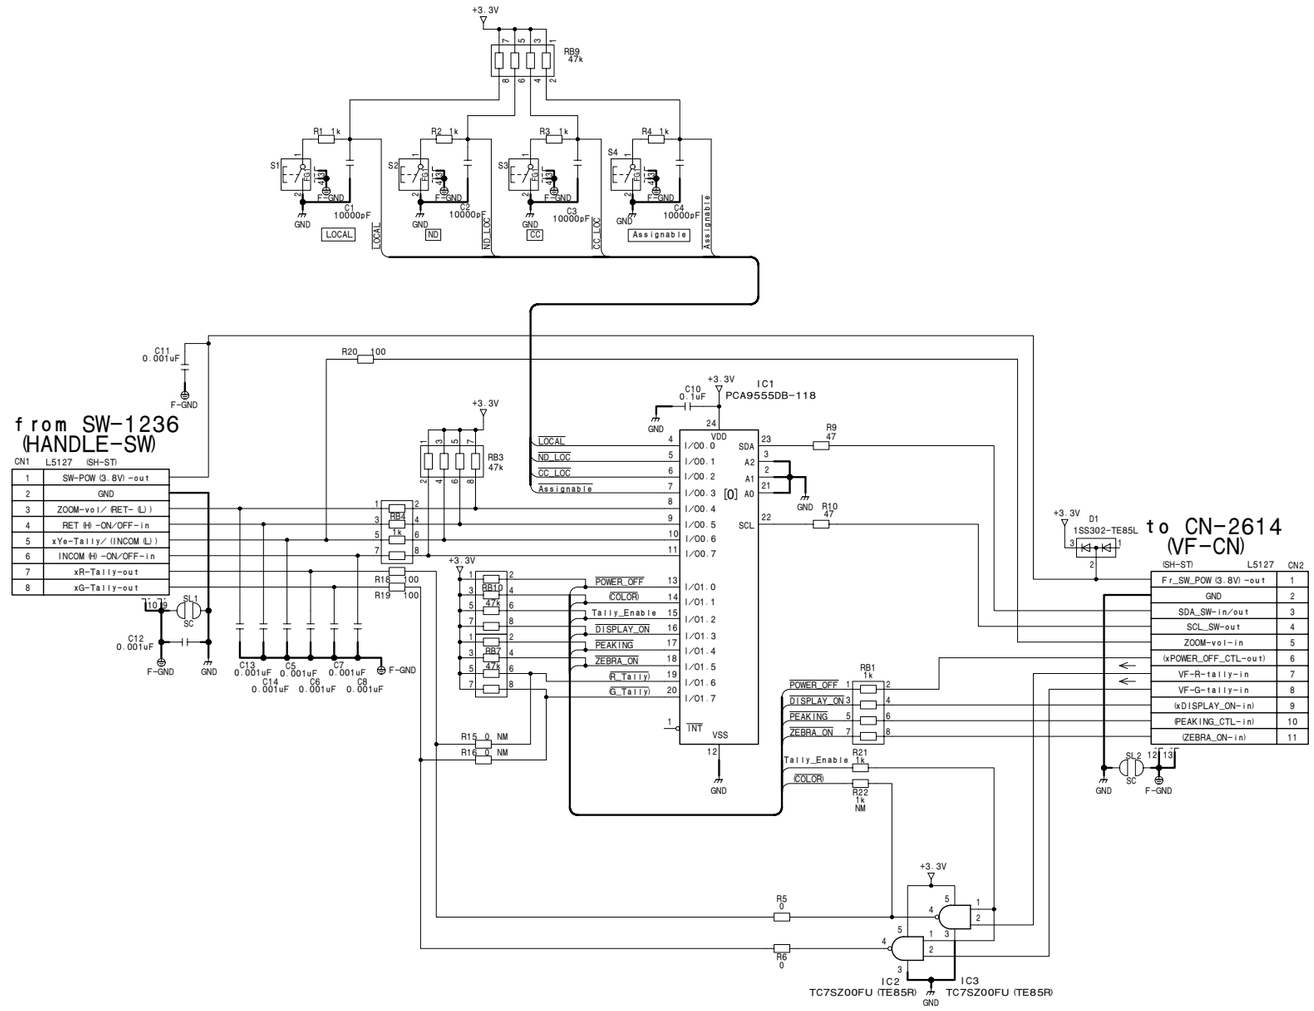

SW-1237
BOARD NO. 1-865-948-13
HDC-1500_SW-1237_013_1


SW-1238, SW-1239, SW-1240
SUFFIX: -12 SUFFIX: -12 SUFFIX: -12



SW-1238

BOARD NO. 1-865-949-12


HDC-1500_SW-1238_001_1

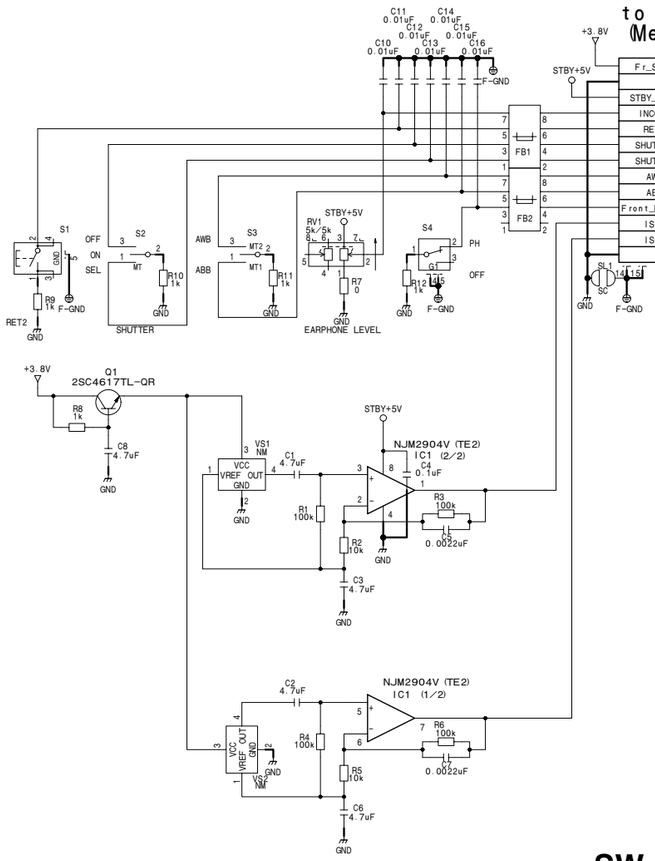

SW-1239

BOARD NO. 1-865-950-12

HDC-1500_SW-1239_001_1

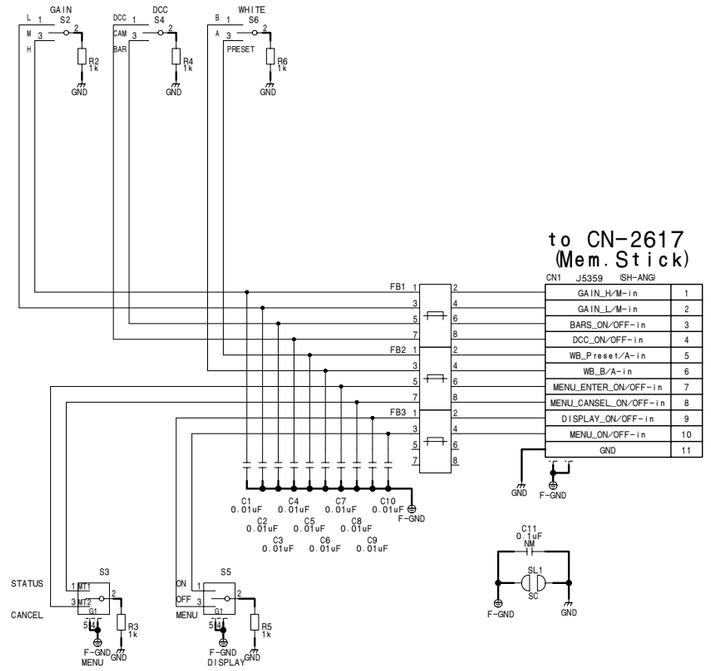



SW-1240

BOARD NO. 1-865-951-12

HDC-1500_SW-1240_001_1

SW-1241/1241B, SW-1242, SW-1245
SUFFIX: -13 SUFFIX: -13 SUFFIX: -13

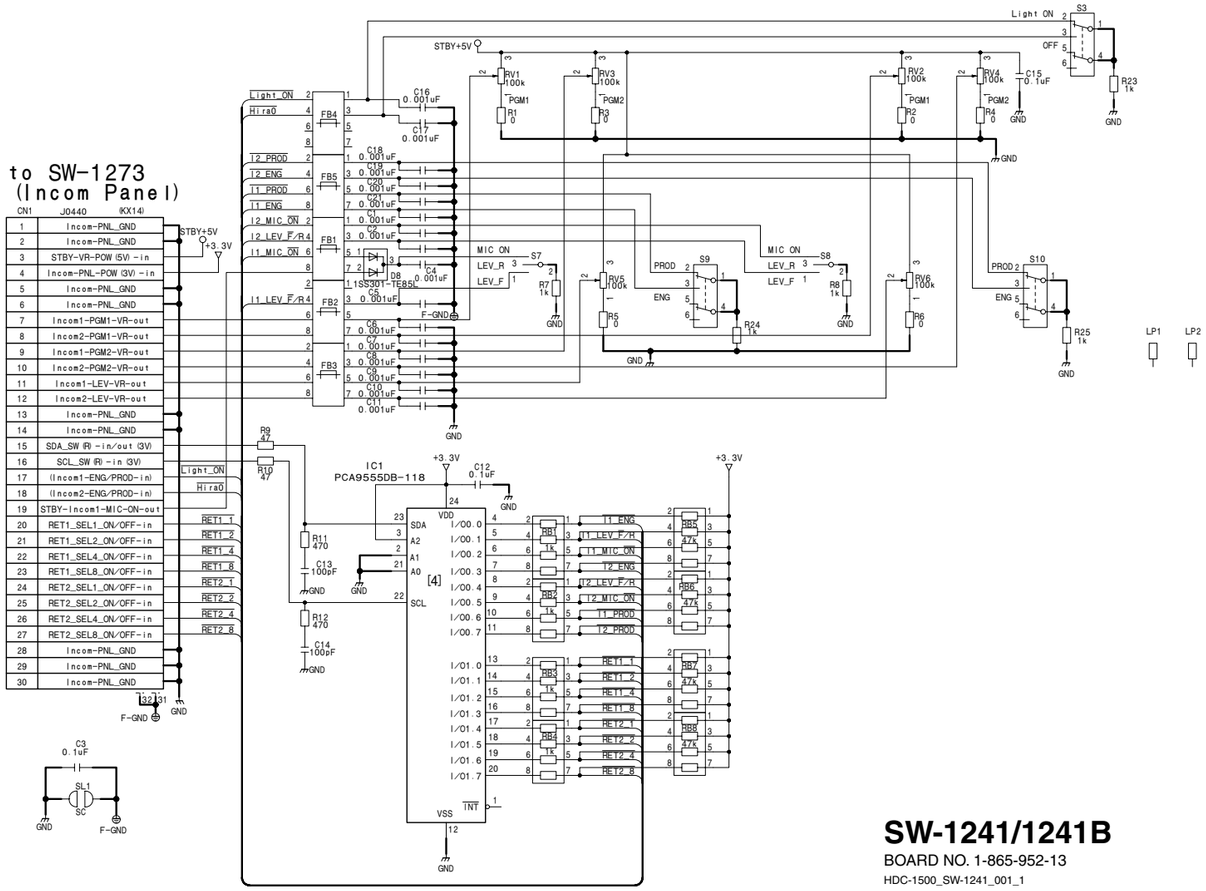

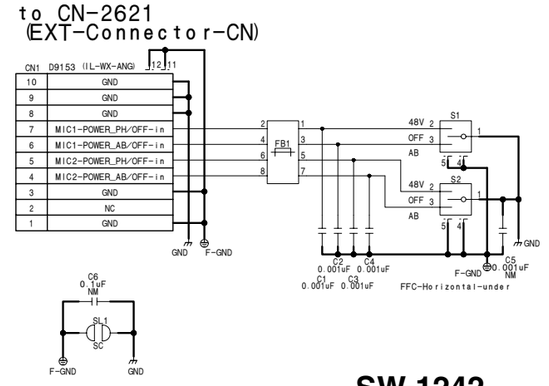

SW-1242


BOARD NO. 1-865-953-13

HDC-1500_SW-1242_001_1

SW-1241/1241B

BOARD NO. 1-865-952-13


HDC-1500_SW-1241_001_1



SW-1245

BOARD NO. 1-865-954-13


HDC-1500_SW-1245_001_1

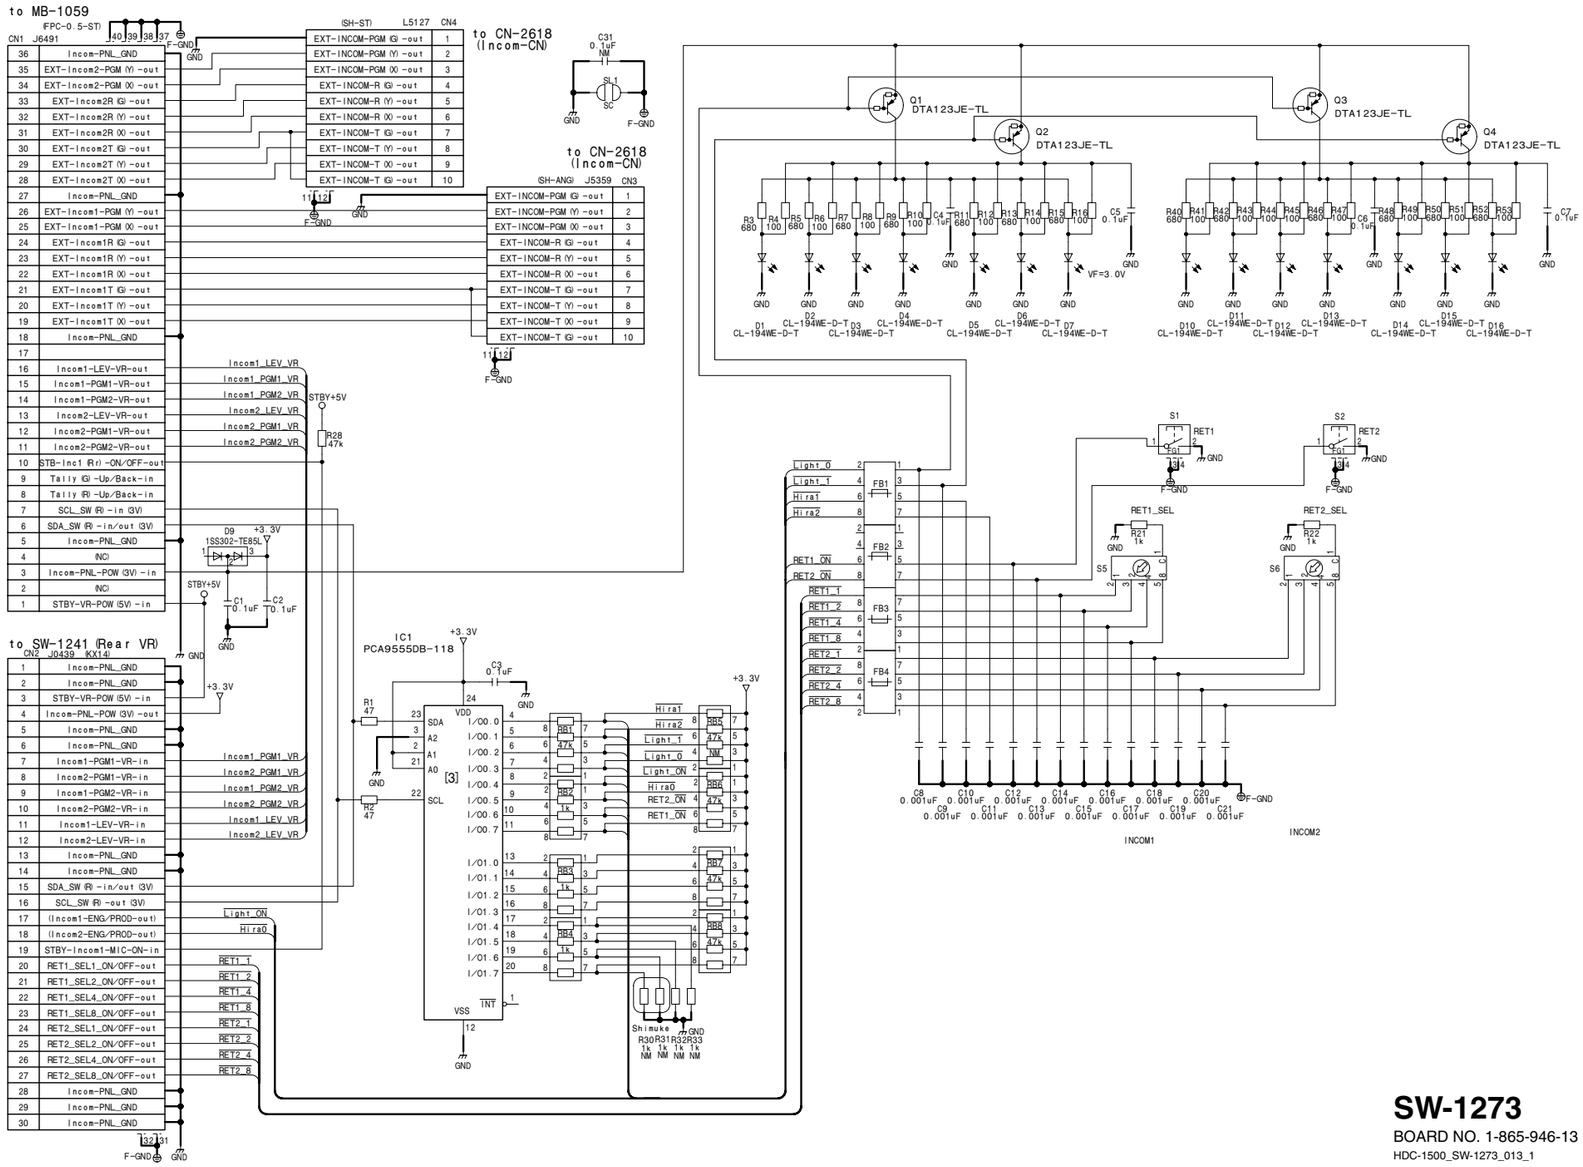


SW-1273

BOARD NO. 1-865-946-13


HDC-1500_SW-1273_013_1

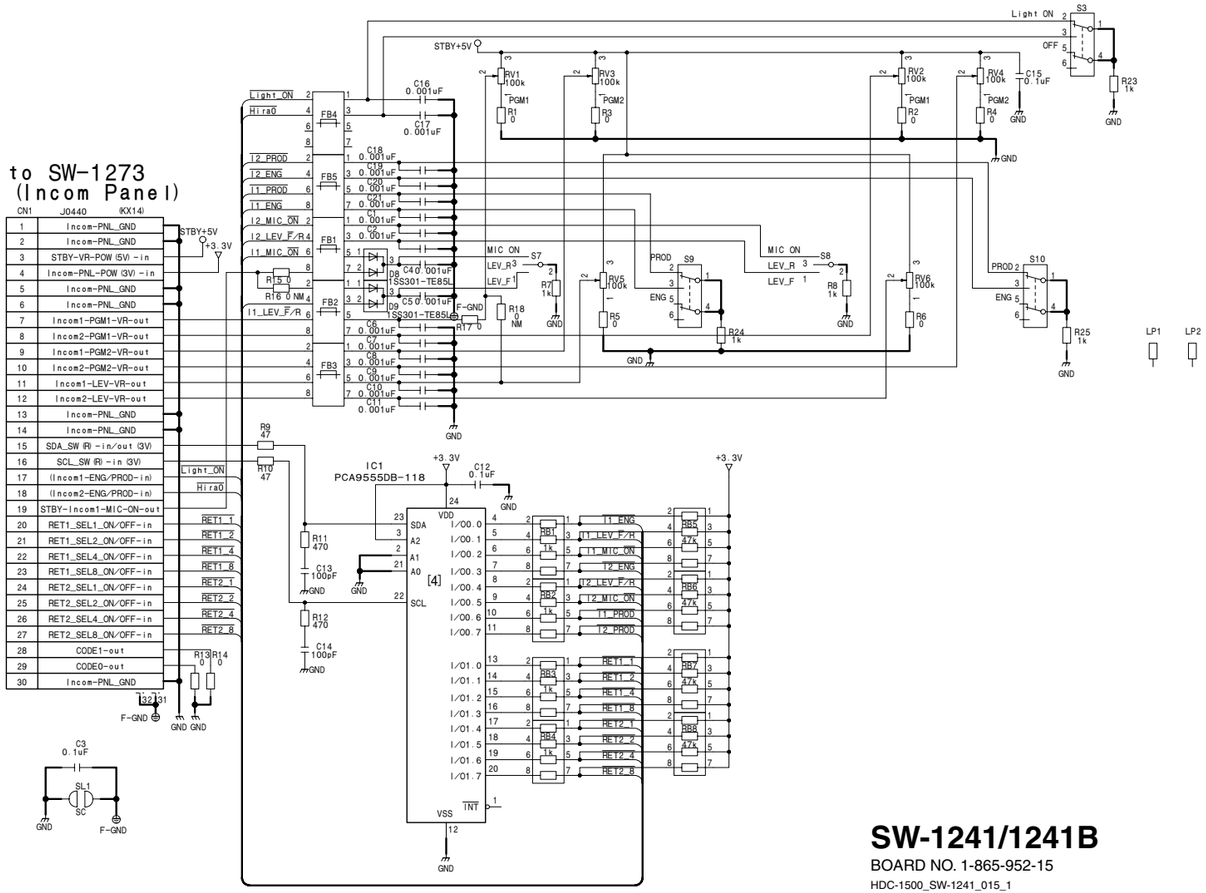
to SW-1273
(Incom Panel)
CN1 J0440 (KX14)
1 Incom-PNL_GND
2 Incom-PNL_GND
3 STBY-VR-POW (5V) -in
4 Incom-PNL-POW (3V) -in
5 Incom-PNL_GND
6 Incom-PNL_GND
7 Incom1-PGM1-VR-out
8 Incom2-PGM1-VR-out
9 Incom1-PGM2-VR-out
10 Incom2-PGM2-VR-out
11 Incom1-LEV-VR-out
12 Incom2-LEV-VR-out
13 Incom-PNL_GND
14 Incom-PNL_GND
15 SDA_SW (R) -in/out (3V)
16 SCL_SW (R) -in (3V)
17 (Incom1-ENG/PROD-in)
18 (Incom2-ENG/PROD-in)
19 STBY-Incom1-MIC-ON-out
20 RET1_SEL1_ON/OFF-in
21 RET1_SEL2_ON/OFF-in
22 RET1_SEL4_ON/OFF-in
23 RET1_SEL8_ON/OFF-in
24 RET2_SEL1_ON/OFF-in
25 RET2_SEL2_ON/OFF-in
26 RET2_SEL4_ON/OFF-in
27 RET2_SEL8_ON/OFF-in
28 CODE1-out
29 CODE0-out
30 Incom-PNL_GND
STBY+5V
+3.3V
Light_ON
Hira0
T2_PROD
T2_ENG
T1_PROD
T1_ENG
T2_MIC_ON
T2_LEV_F/R
T1_MIC_ON
T1_LEV_F/R
FB1
FB2
FB3
FB4
FB5
D8 1SS301-TE85L
D9 1SS301-TE85L
R15 0
R16 0 NM
R17 0
R18 0 NM
R7 1k
R8 1k
R9 47
R10 47
R11 470
R12 470
R13 0
R14 0
R23 1k
R24 1k
R25 1k
R5 0
R6 0
C3 0.1uF
C12 0.1uF
C13 100pF
C14 100pF
C15 0.1uF
C16 0.001uF
C17 0.001uF
C18 0.001uF
C19 0.001uF
C20 0.001uF
C21 0.001uF
C22 0.001uF
C23 0.001uF
C24 0.001uF
C25 0.001uF
C26 0.001uF
C27 0.001uF
C28 0.001uF
C29 0.001uF
C30 0.001uF
C31 0.001uF
C32 0.001uF
C33 0.001uF
C34 0.001uF
C35 0.001uF

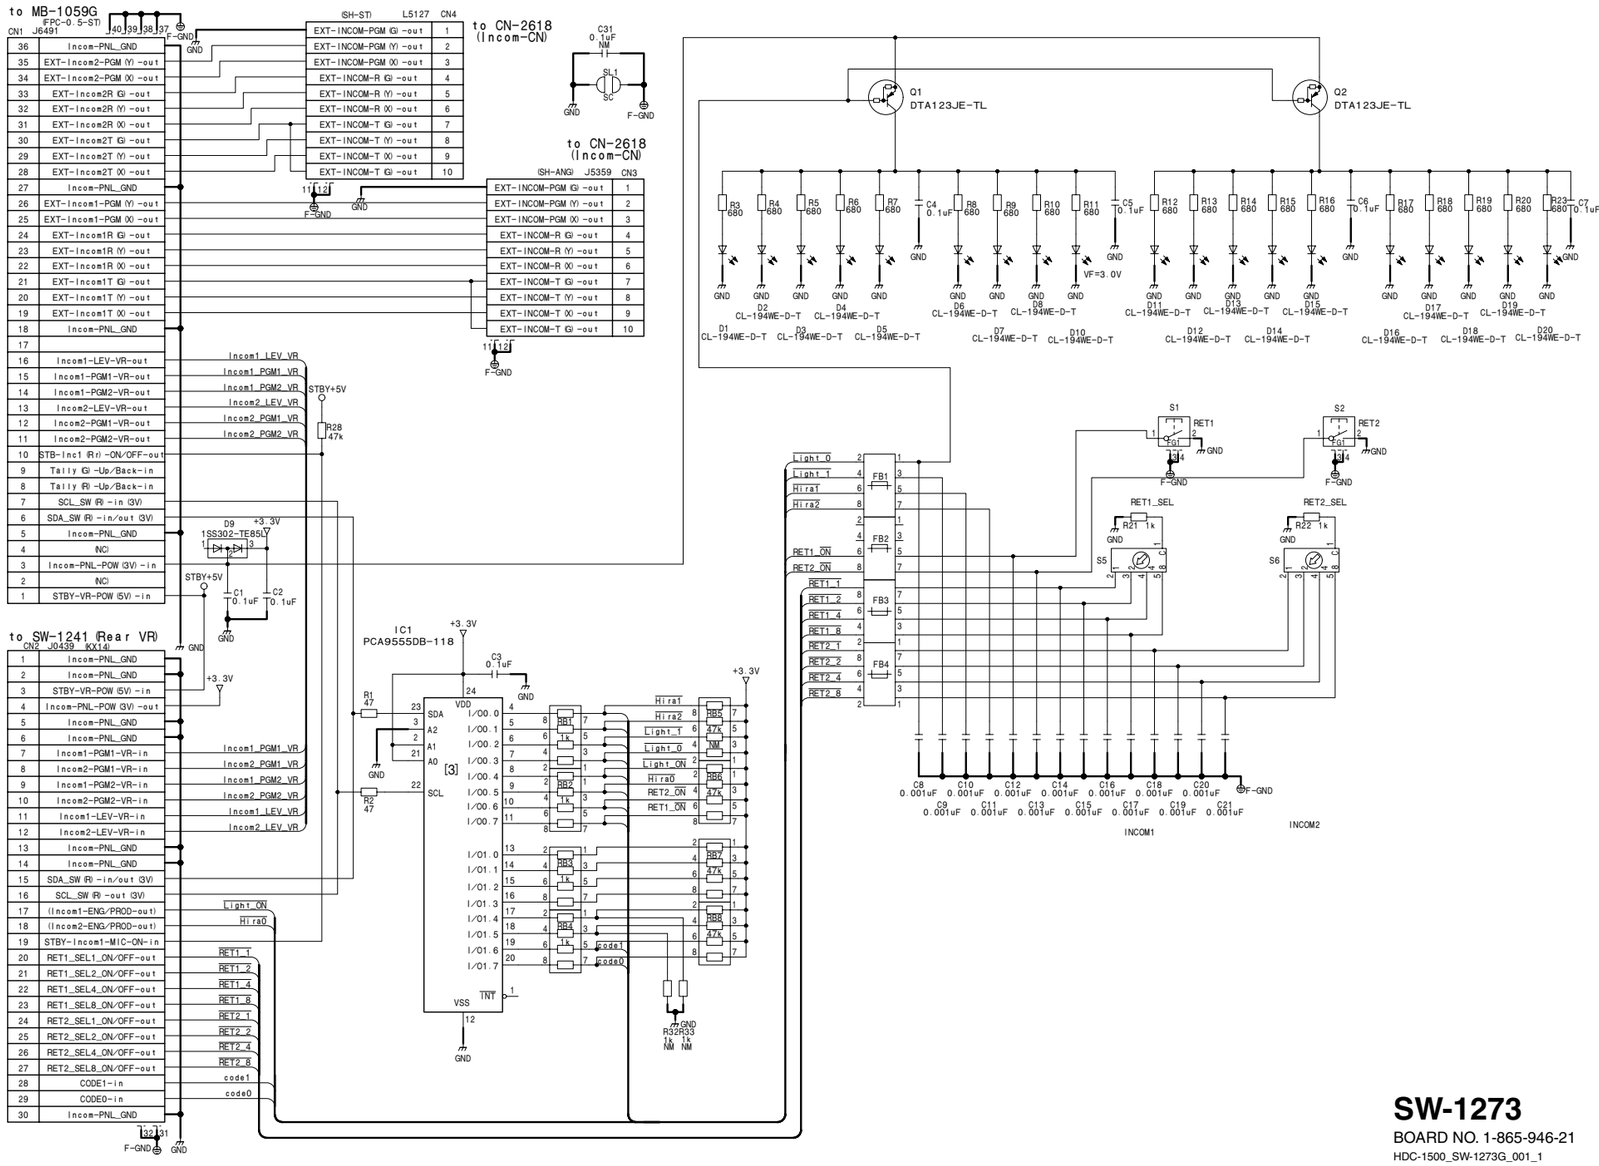

SW-1273
BOARD NO. 1-865-946-21
HDC-1500_SW-1273G_001_1

TG-243 (1/2)
SUFFIX: -14, 21

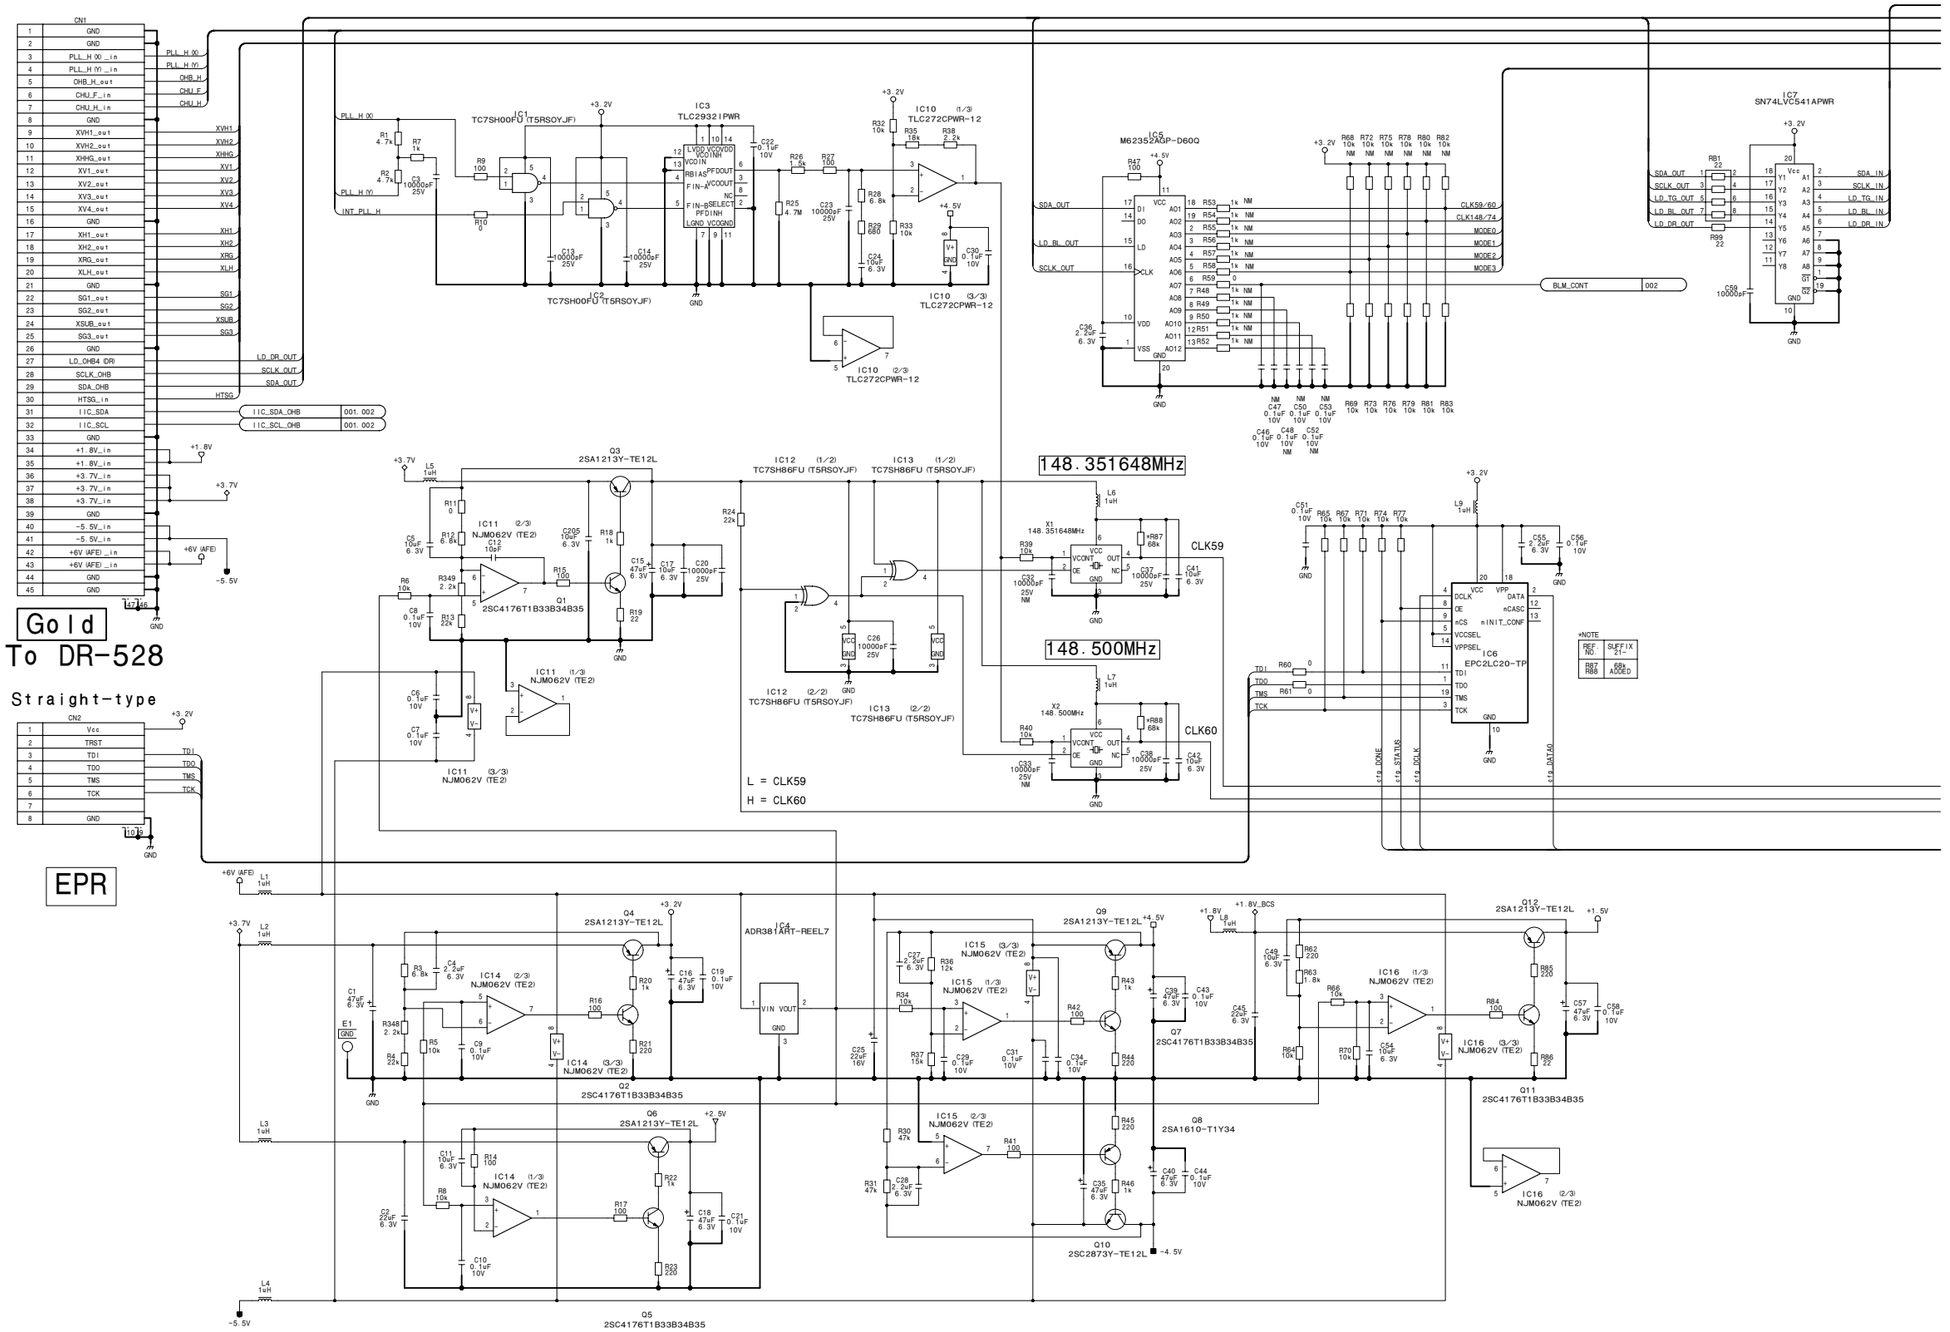

4-114

TG-243 (1/2)
SUFFIX: -14, 21

TG
for ICX470ALA [IT]


IC9
EP1C6F256C6N

IC8
TLC7733IPWR-12

To PA-317

TG-243 (1/2)
BOARD NO. 1-865-972-14, 21
HDC-1500_TG-243G_021_1


TG-243 (2/2)
SUFFIX: -14, 21

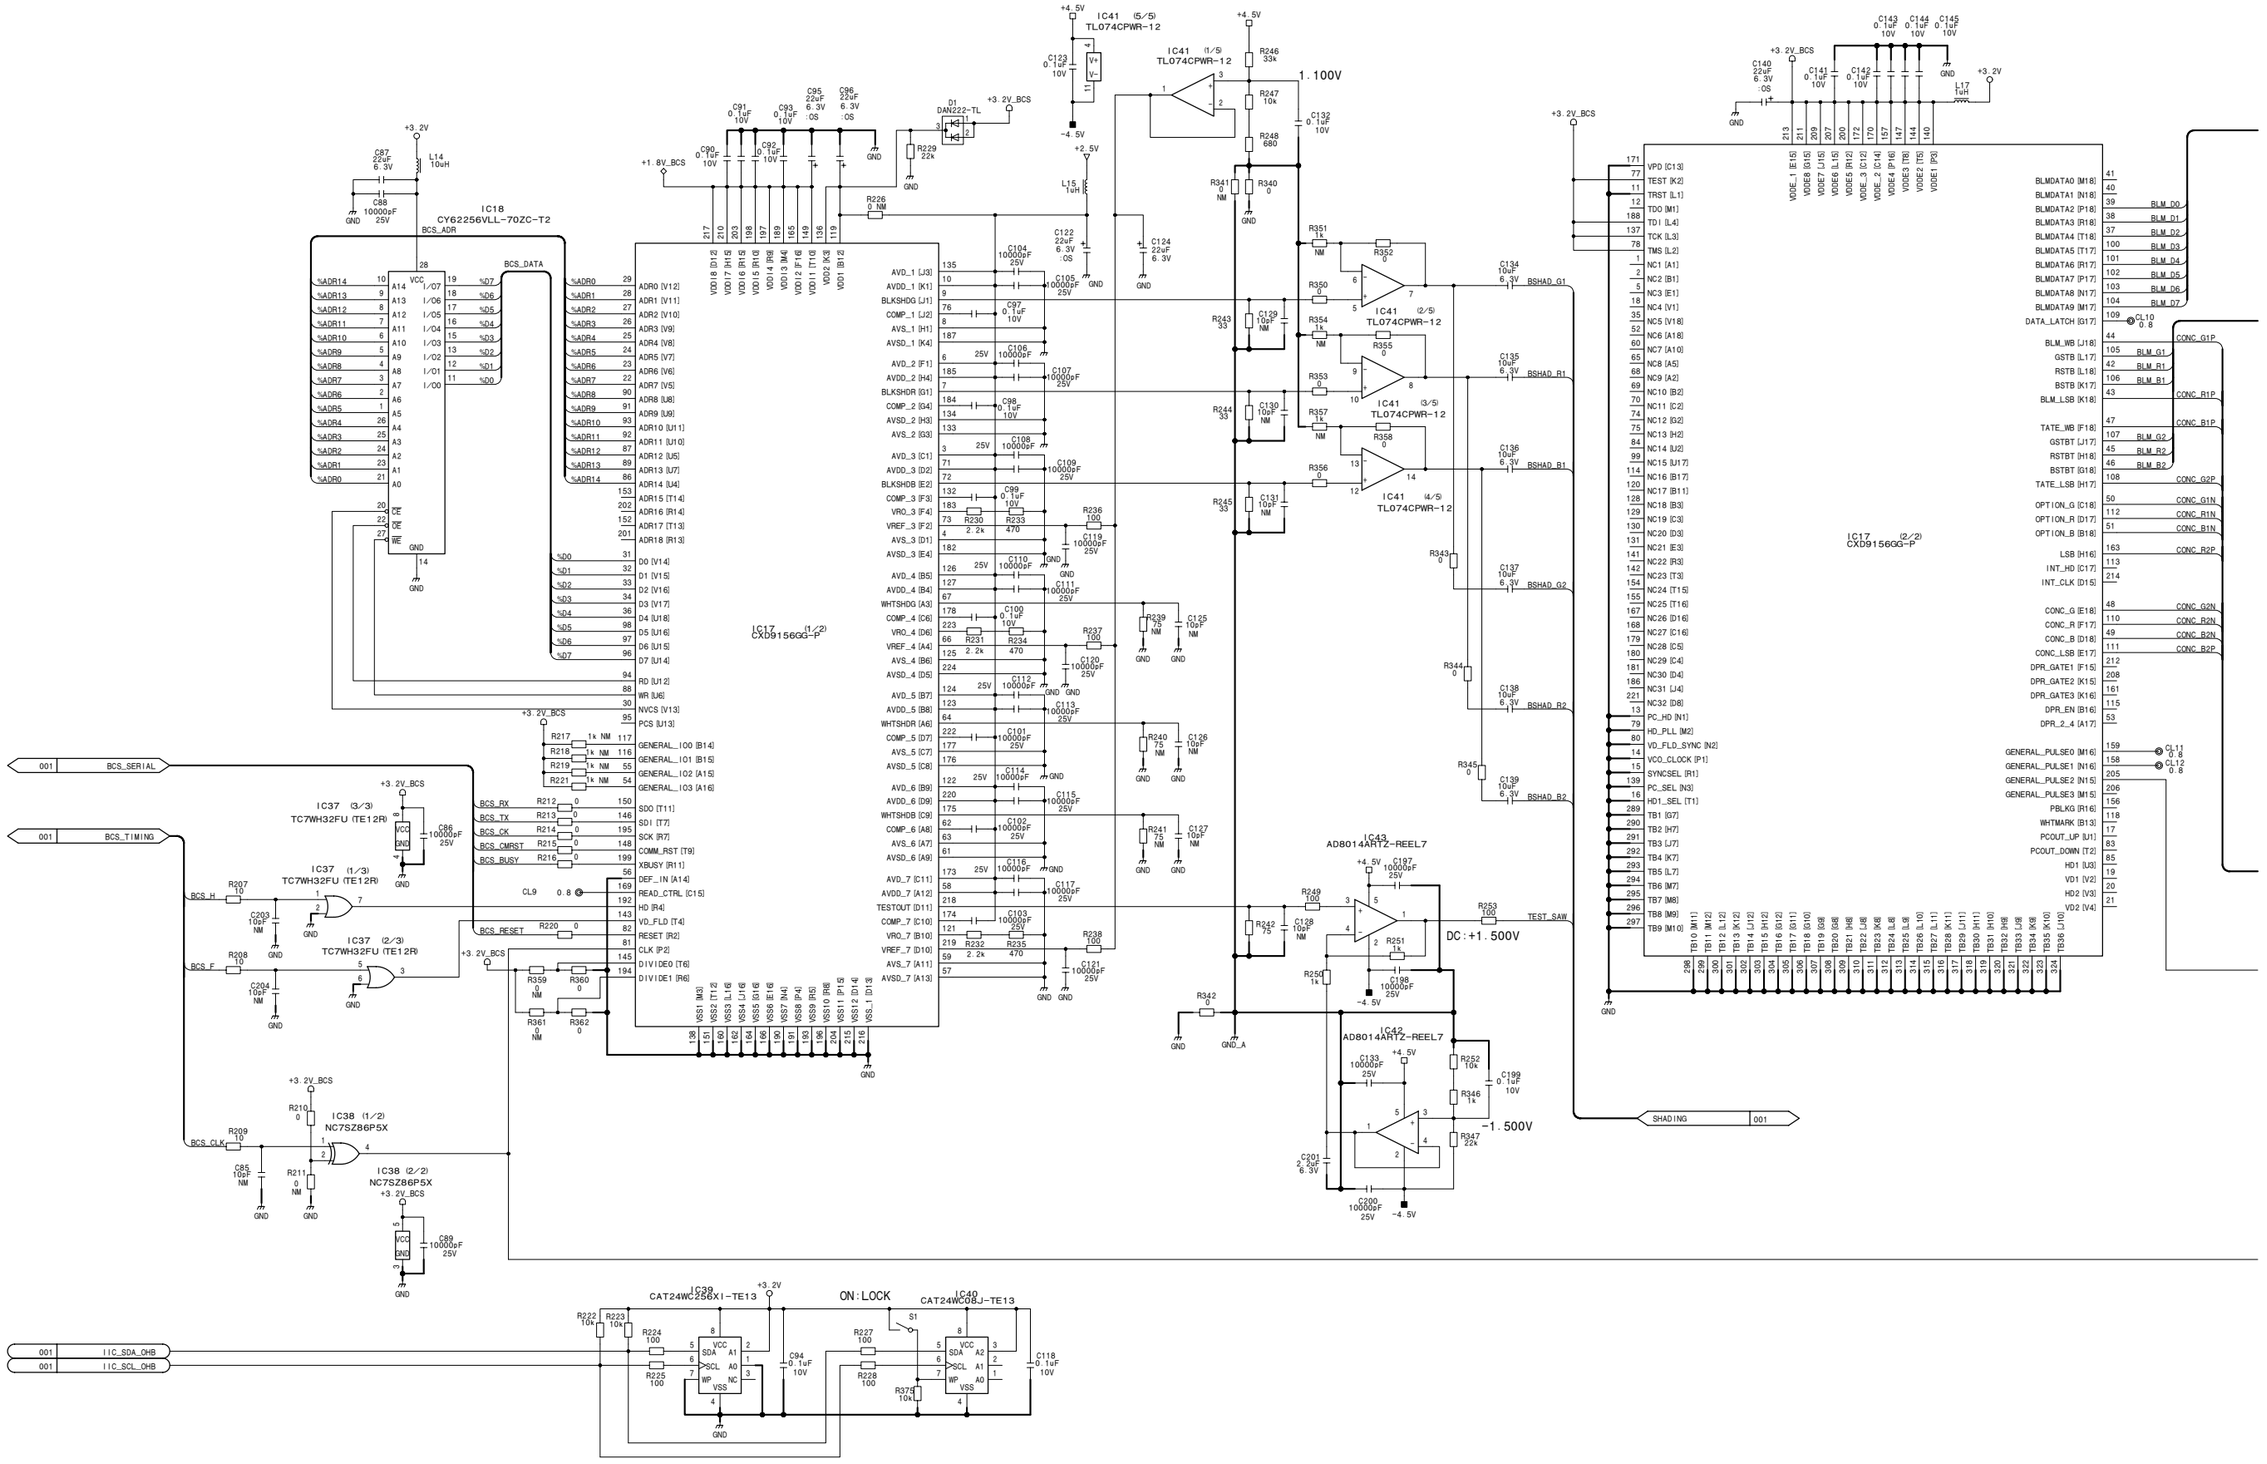

4-116

TG-243 (2/2)
SUFFIX: -14, 21

TG-243 (2/2)
SUFFIX: -14, 21

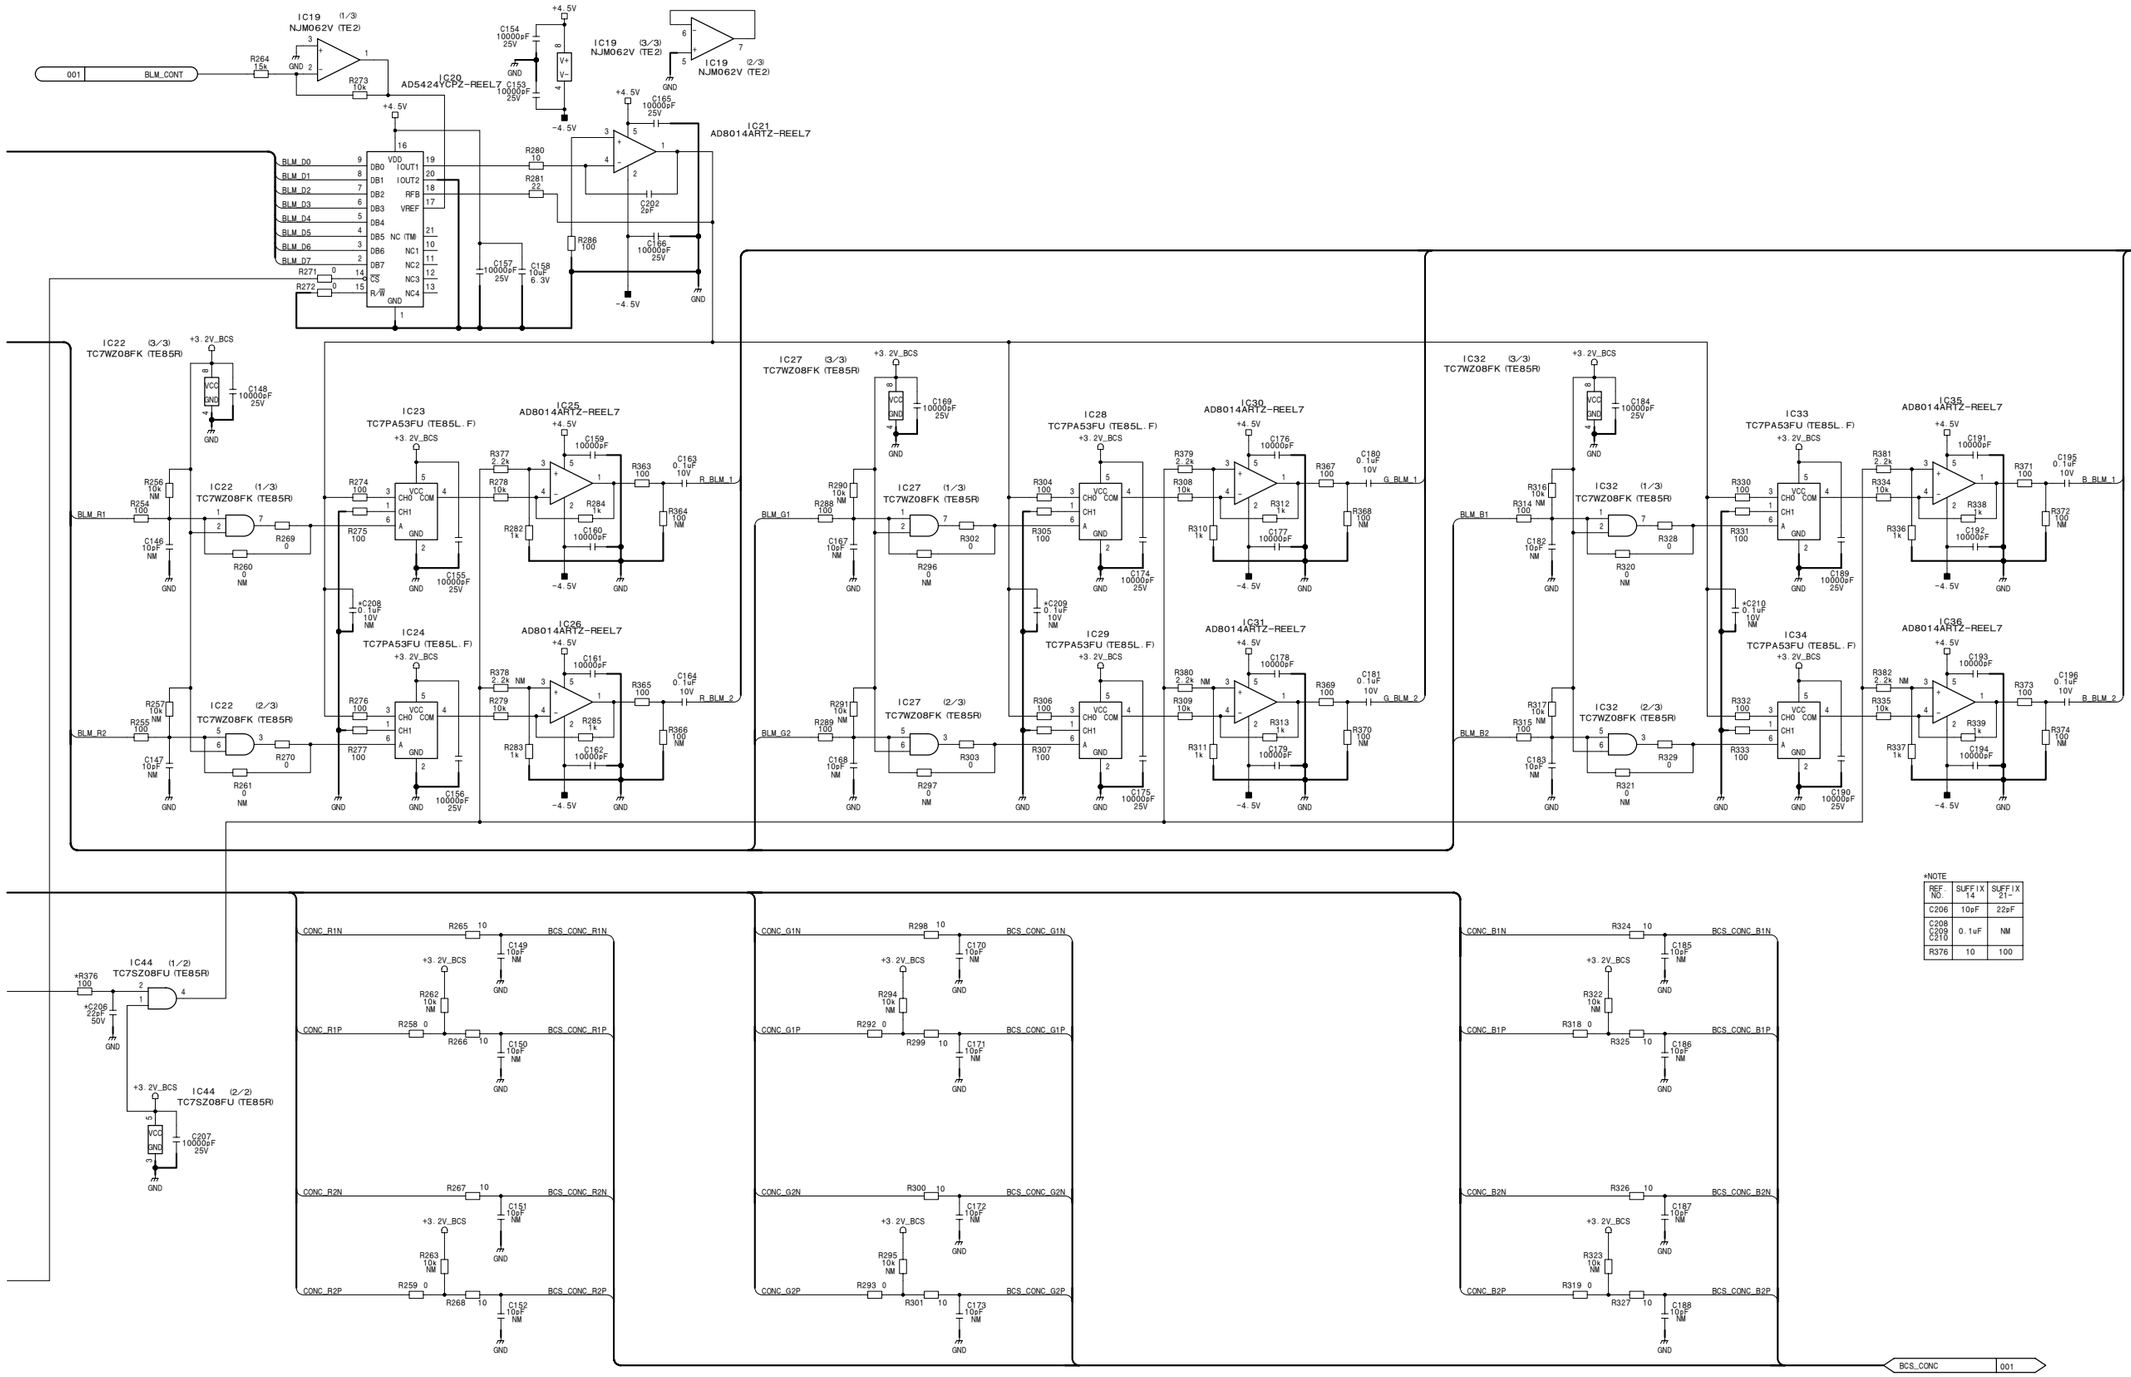


*NOTE

REF. NO.	SUFFIX 14	SUFFIX 21~
C206	10pF	22pF
C208 C209 C210	0.1uF	NM
R376	10	100

TG-243 (2/2)
BOARD NO. 1-865-972-14, 21
HDC-1500_TG-243G_021_2

TG-243C (1/2)
SUFFIX: -21

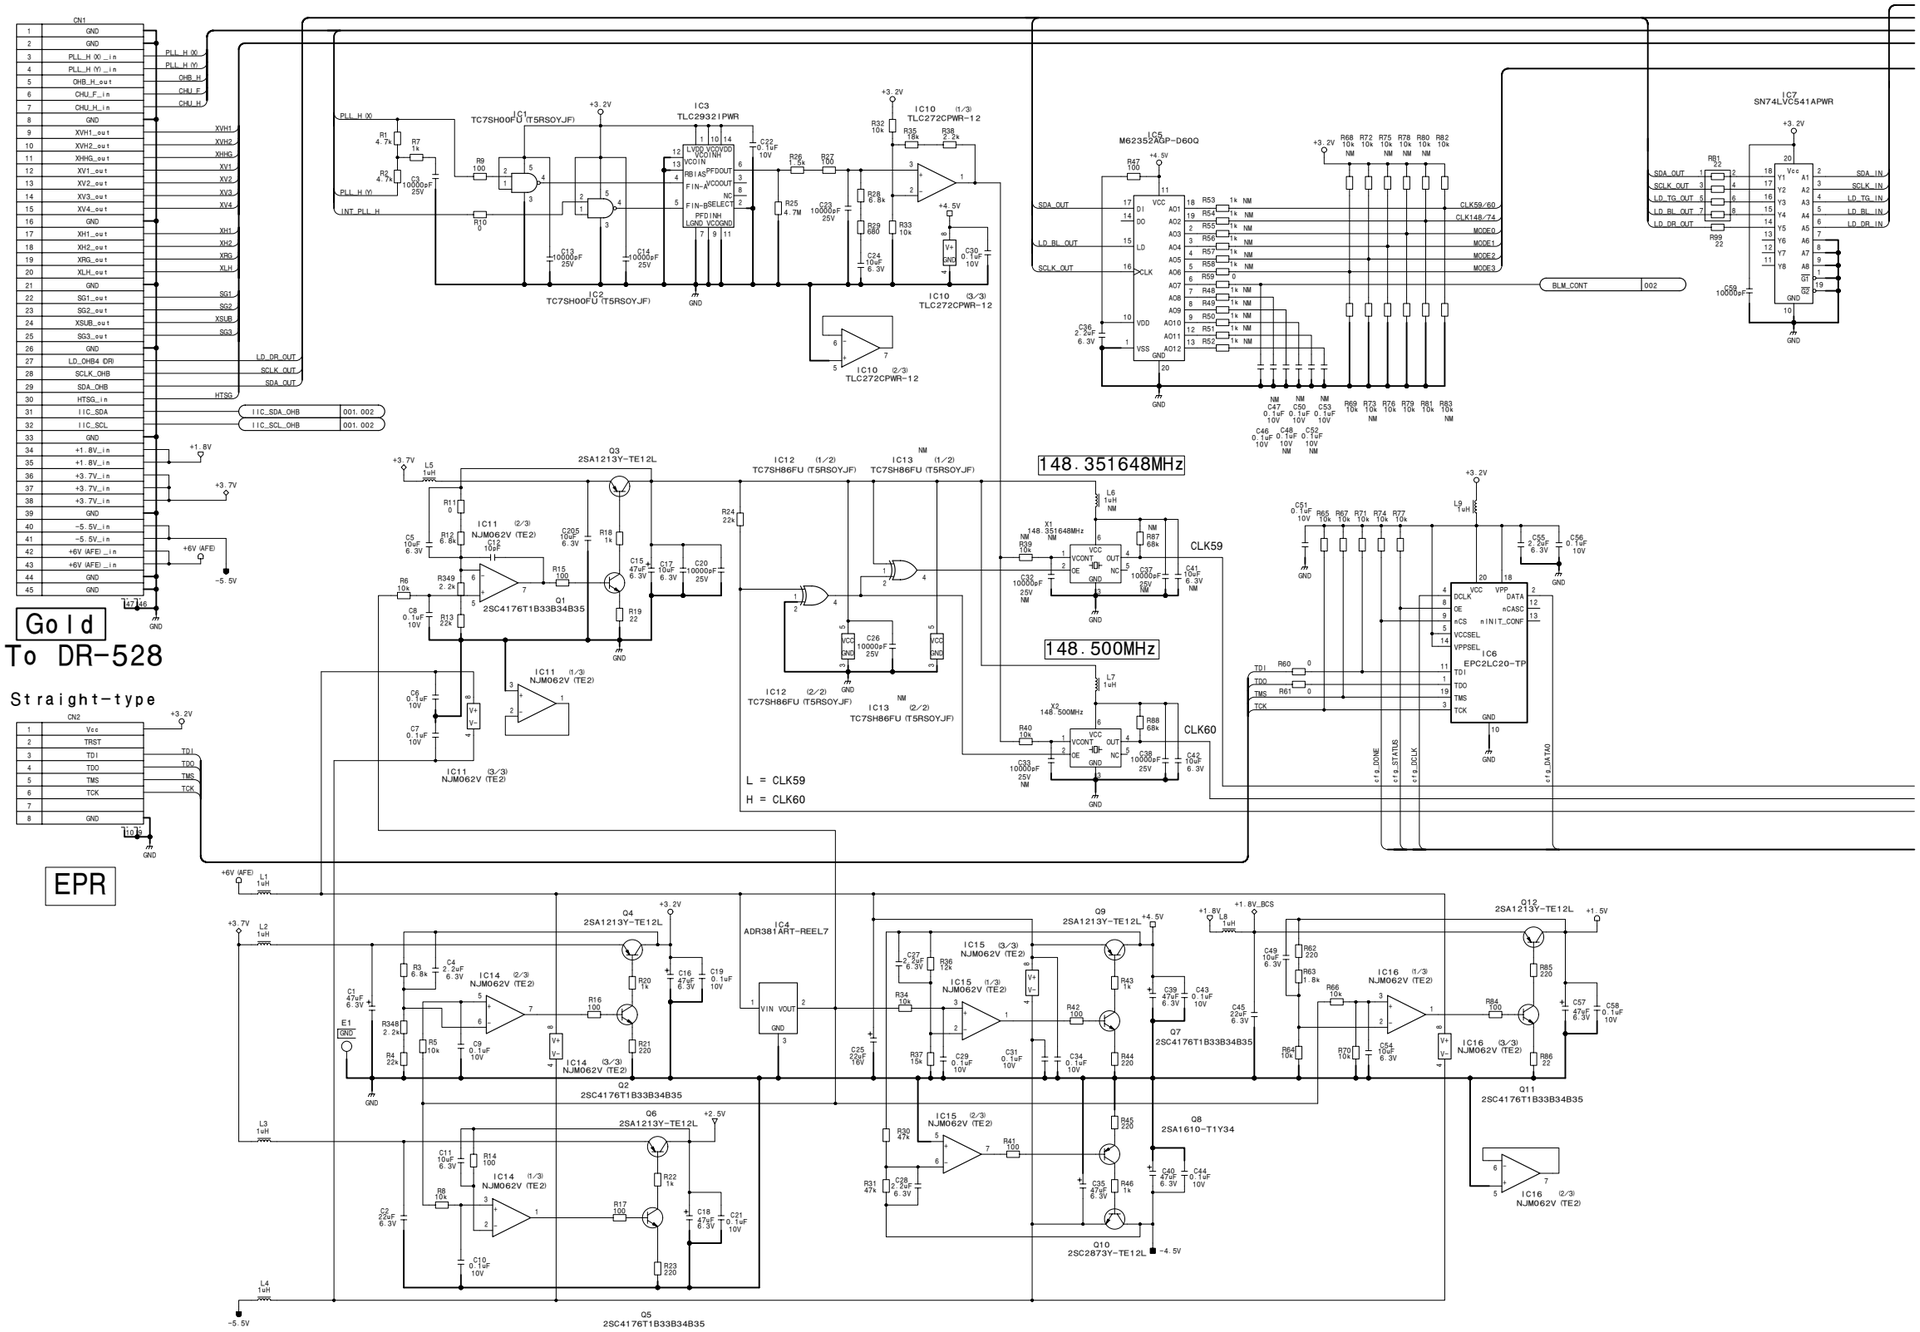

4-118

TG-243C (1/2)
SUFFIX: -21


TG
for ICX470ALA [IT]


IC9
EP1C6F256C6N

IC8
TLC7733IPWR-12

To PA-317

4-119

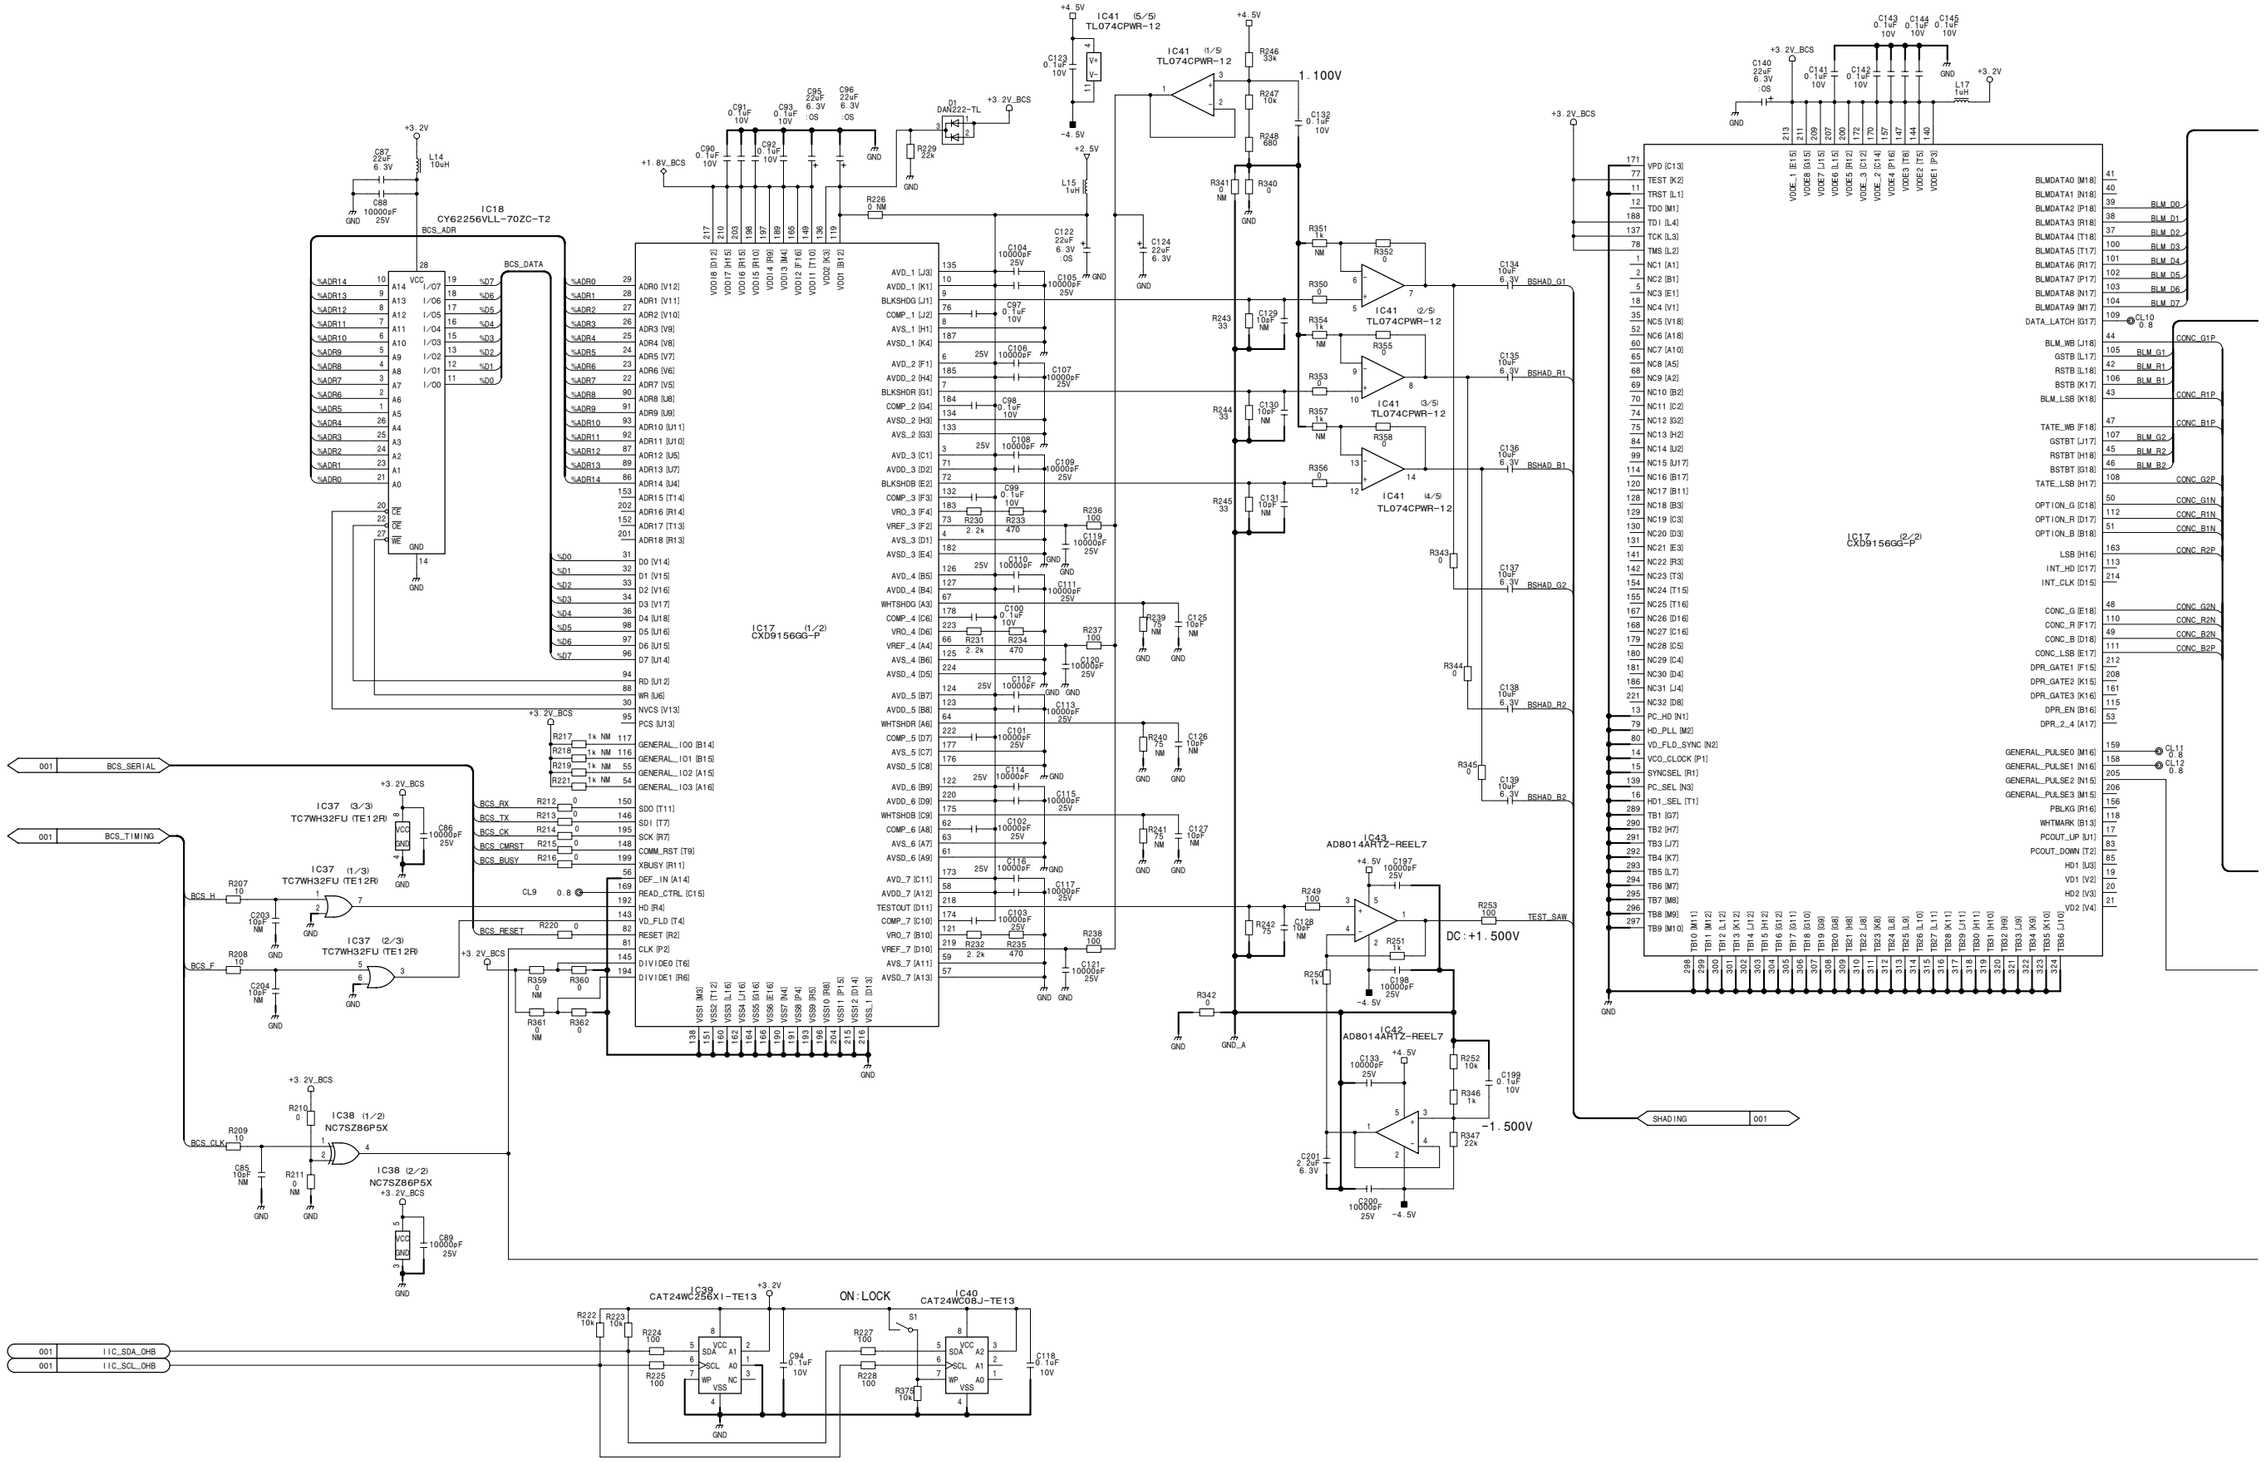
IC18
CY62256VLL-70ZC-T2
IC17
CXD9156GG-P (1/2)
IC17
CXD9156GG-P (2/2)
IC41 (5/5) TL074CPWR-12
IC41 (1/5) TL074CPWR-12
IC41 (2/5) TL074CPWR-12
IC41 (3/5) TL074CPWR-12
IC41 (4/5) TL074CPWR-12
IC43 AD8014ART2-REEL7
IC42 AD8014ART2-REEL7
IC37 (3/3) TC7WH32FU (TE12R)
IC37 (1/3) TC7WH32FU (TE12R)
IC37 (2/3) TC7WH32FU (TE12R)
IC38 (1/2) NC7SZ86P5X
IC38 (2/2) NC7SZ86P5X
IC39 CAT24WC256XI-TE13
IC40 CAT24WC08J-TE13
1.100V
DC:+1.500V
-1.500V
ON:LOCK
SHADING
001
BCS_SERIAL
BCS_TIMING
IIC_SDA_OHB
IIC_SCL_OHB

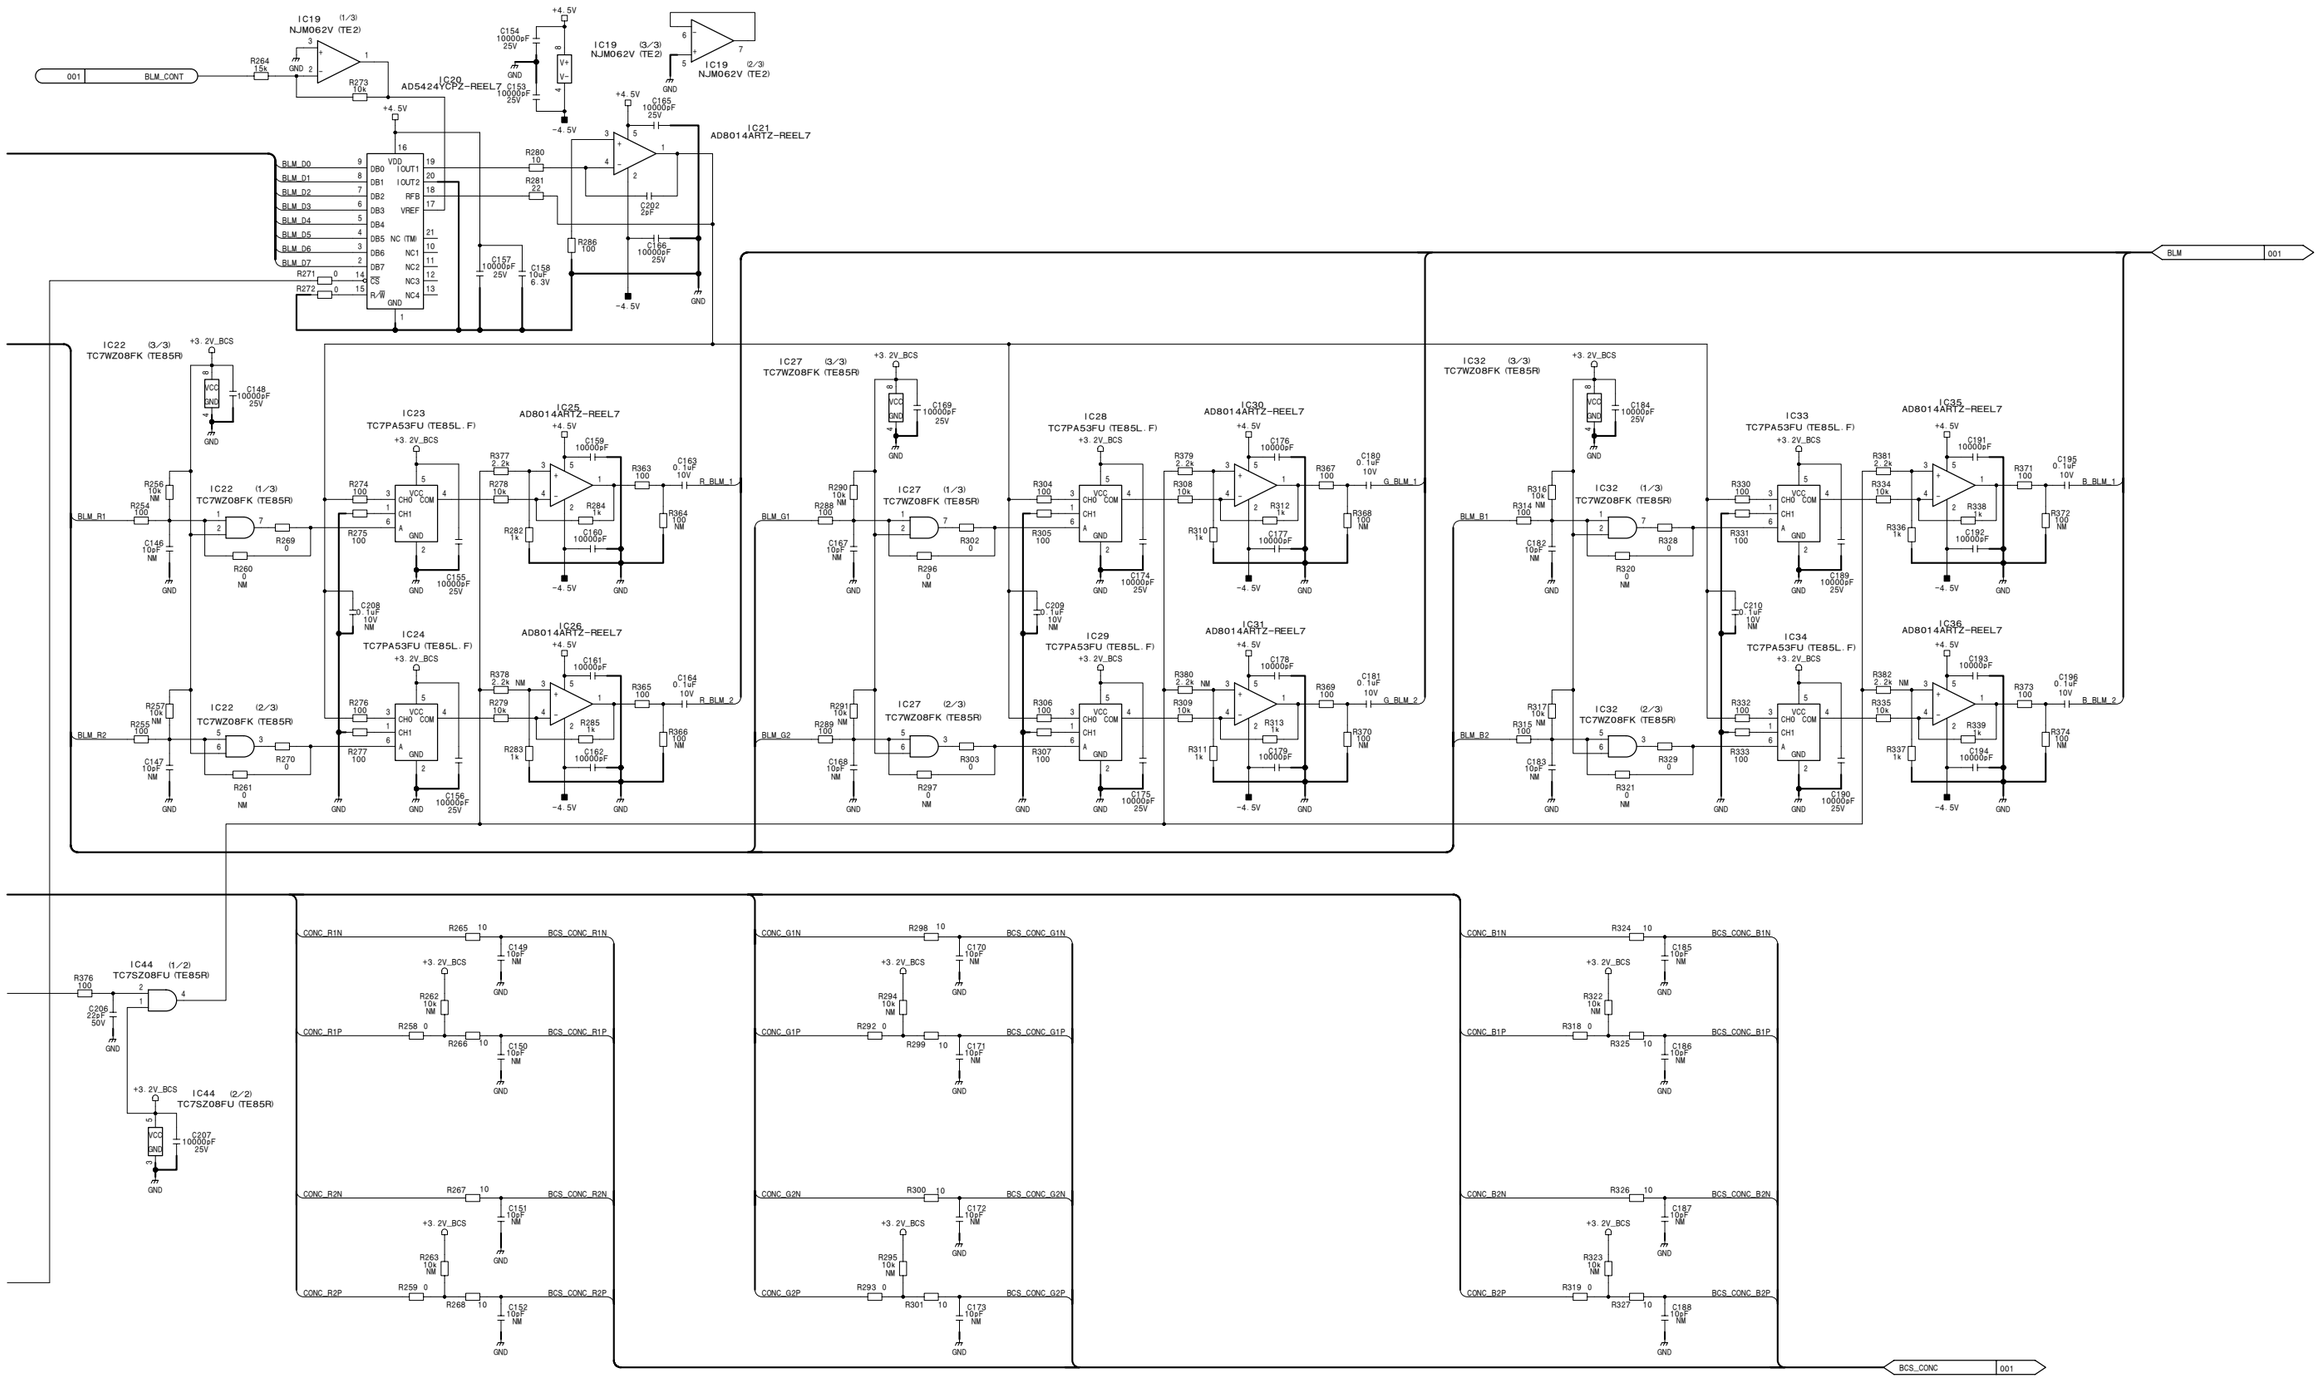

TG-243C (2/2)
BOARD NO. 1-865-972-21
HDC-1500_TG-243CG_021_2

TG-247 (1/2)
SUFFIX: -11, 21

Gold
To DR-562

EPR
Staright-type

148.351648MHz
148.500MHz
CLK59
CLK60
L = CLK59
H = CLK60
V-pulse
i:V
PsF:F


4-122


TG
for ICX230CL [FIT]

IC8 TLC7733IPWR-12
IC9 EP1C6F256C6N
IC7 SN74LVC541APWR

To PA-327

TG-247 (1/2)
BOARD NO. 1-865-960-11, 21
HDC-1600_TG-247G_021_1

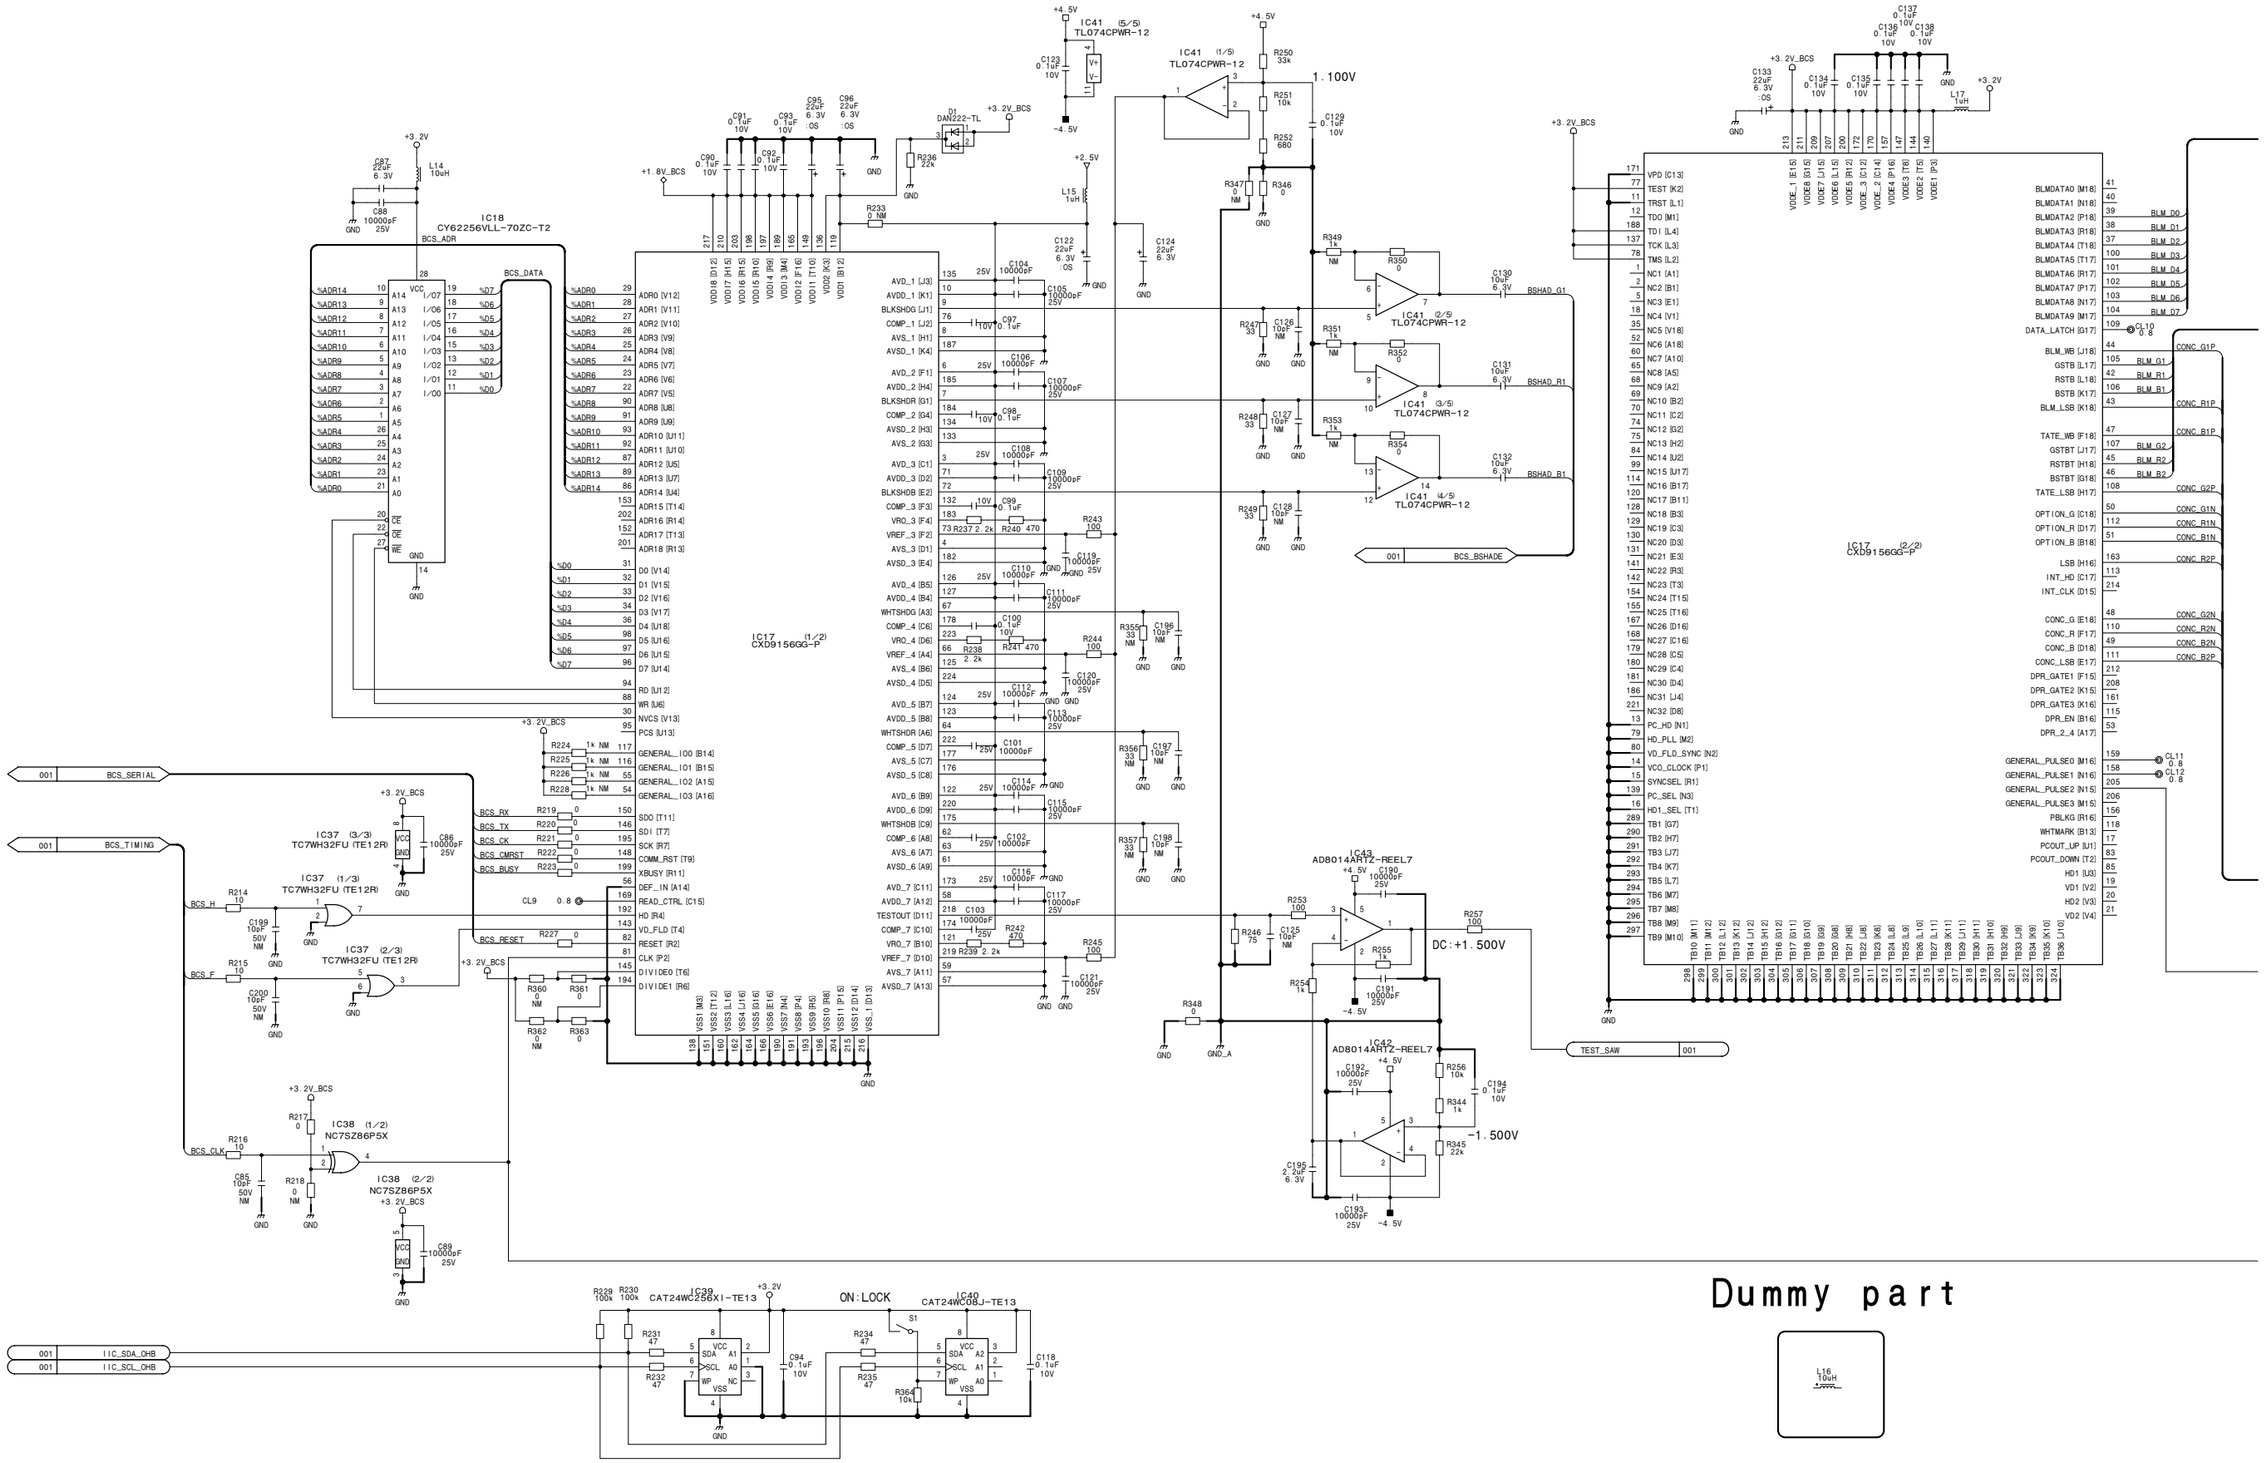
IC18 CY62256VLL-70ZC-T2
BCS_ADR
BCS_DATA
IC17 CXD9156GG-P (1/2)
IC17 CXD9156GG-P (2/2)
IC41 TL074CPWR-12 (5/5)
IC41 TL074CPWR-12 (1/5)
IC41 TL074CPWR-12 (2/5)
IC41 TL074CPWR-12 (3/5)
IC41 TL074CPWR-12 (4/5)
IC37 TC7WH32FU (TE12R) (3/3)
IC37 TC7WH32FU (TE12R) (1/3)
IC37 TC7WH32FU (TE12R) (2/3)
IC38 NC7SZ86P5X (1/2)
IC38 NC7SZ86P5X (2/2)
IC39 CAT24WC256XI-TE13
IC40 CAT24WC08J-TE13
IC43 AD8014ART2-REEL7
IC42 AD8014ART2-REEL7
D1 DAN222-TL
ON:LOCK
S1
1.100V
DC:+1.500V
-1.500V
BCS_SERIAL
BCS_TIMING
IIC_SDA_GHB
IIC_SCL_GHB
BCS_BSHADE
TEST_SAW
BSHAD_G1
BSHAD_R1
BSHAD_B1
Dummy part
L16 10uH

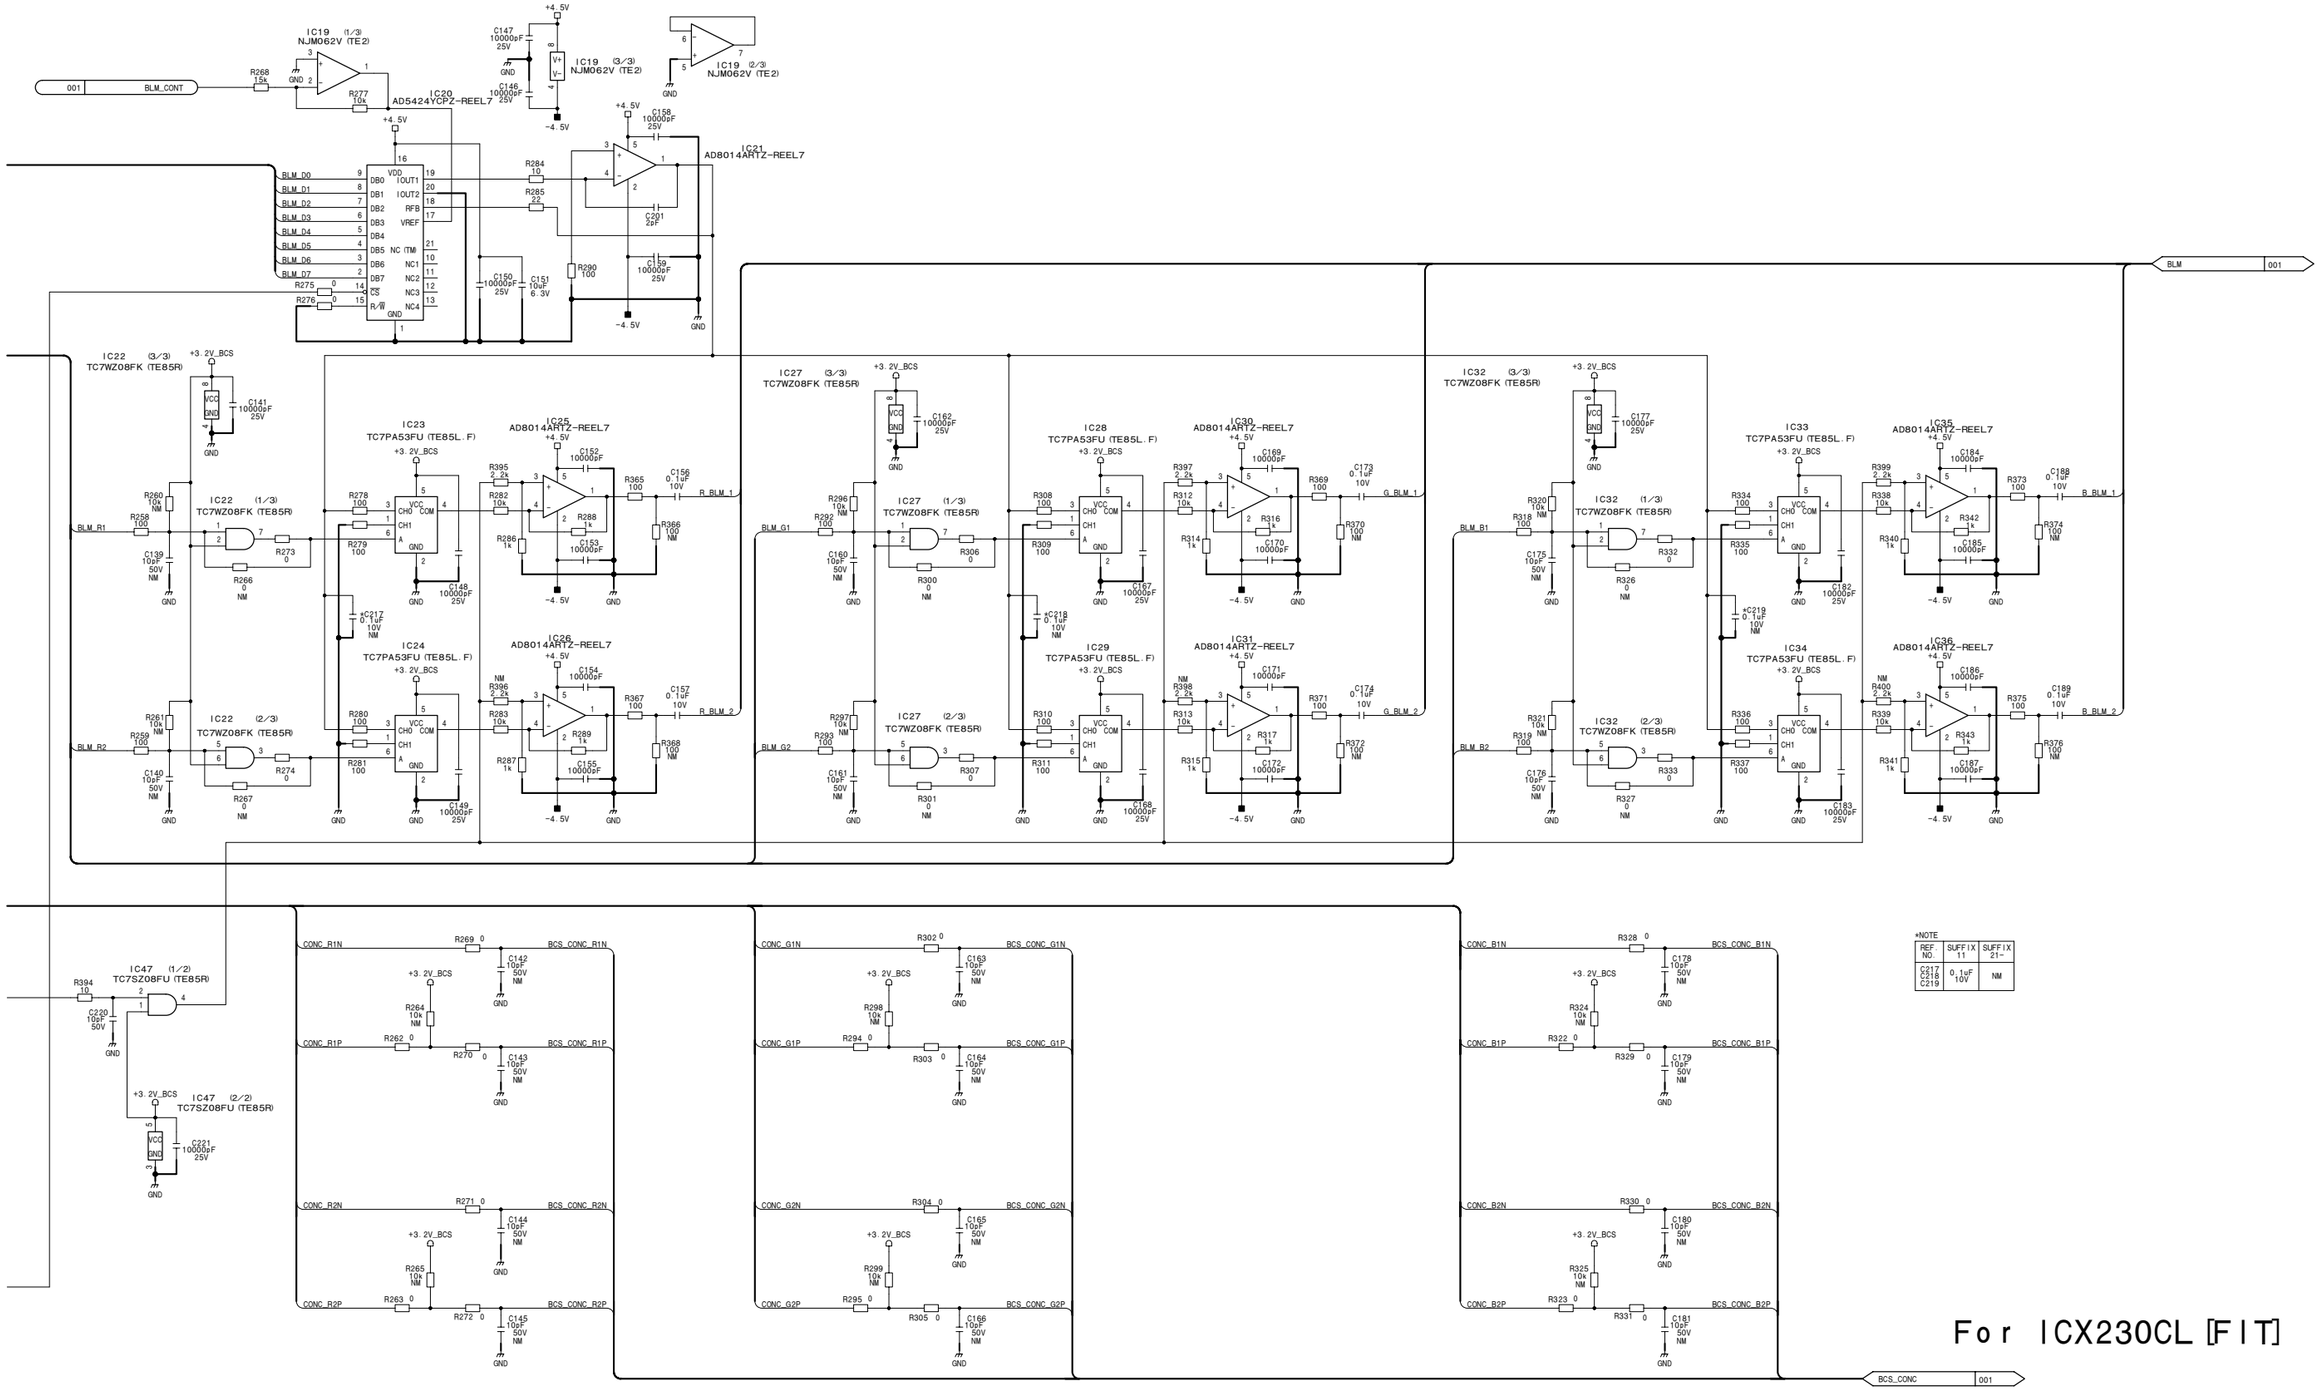

*NOTE

REF NO.	SUFFIX 11	SUFFIX 21~
C217 C218 C219	0.1uF 10V	NM


For ICX230CL [FIT]


TG-247 (2/2)
BOARD NO. 1-865-960-11, 21
HDC-1600_TG-247G_021_2

TR-136 (1/7)

SUFFIX: -13, 14

TR-136 (1/7)
SUFFIX: -13, 14

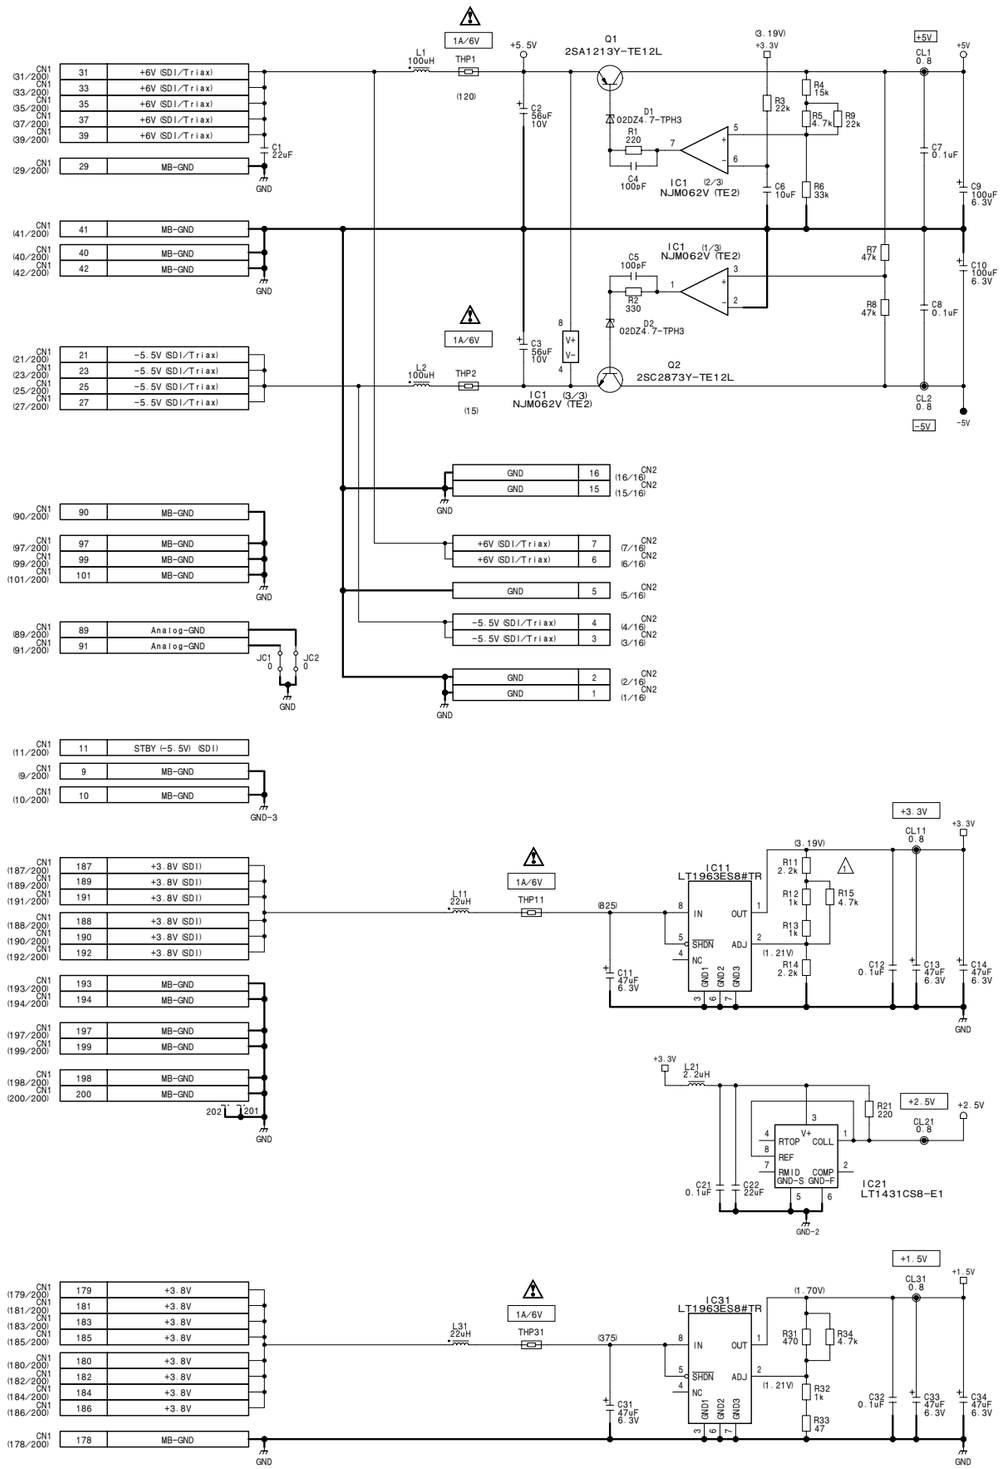

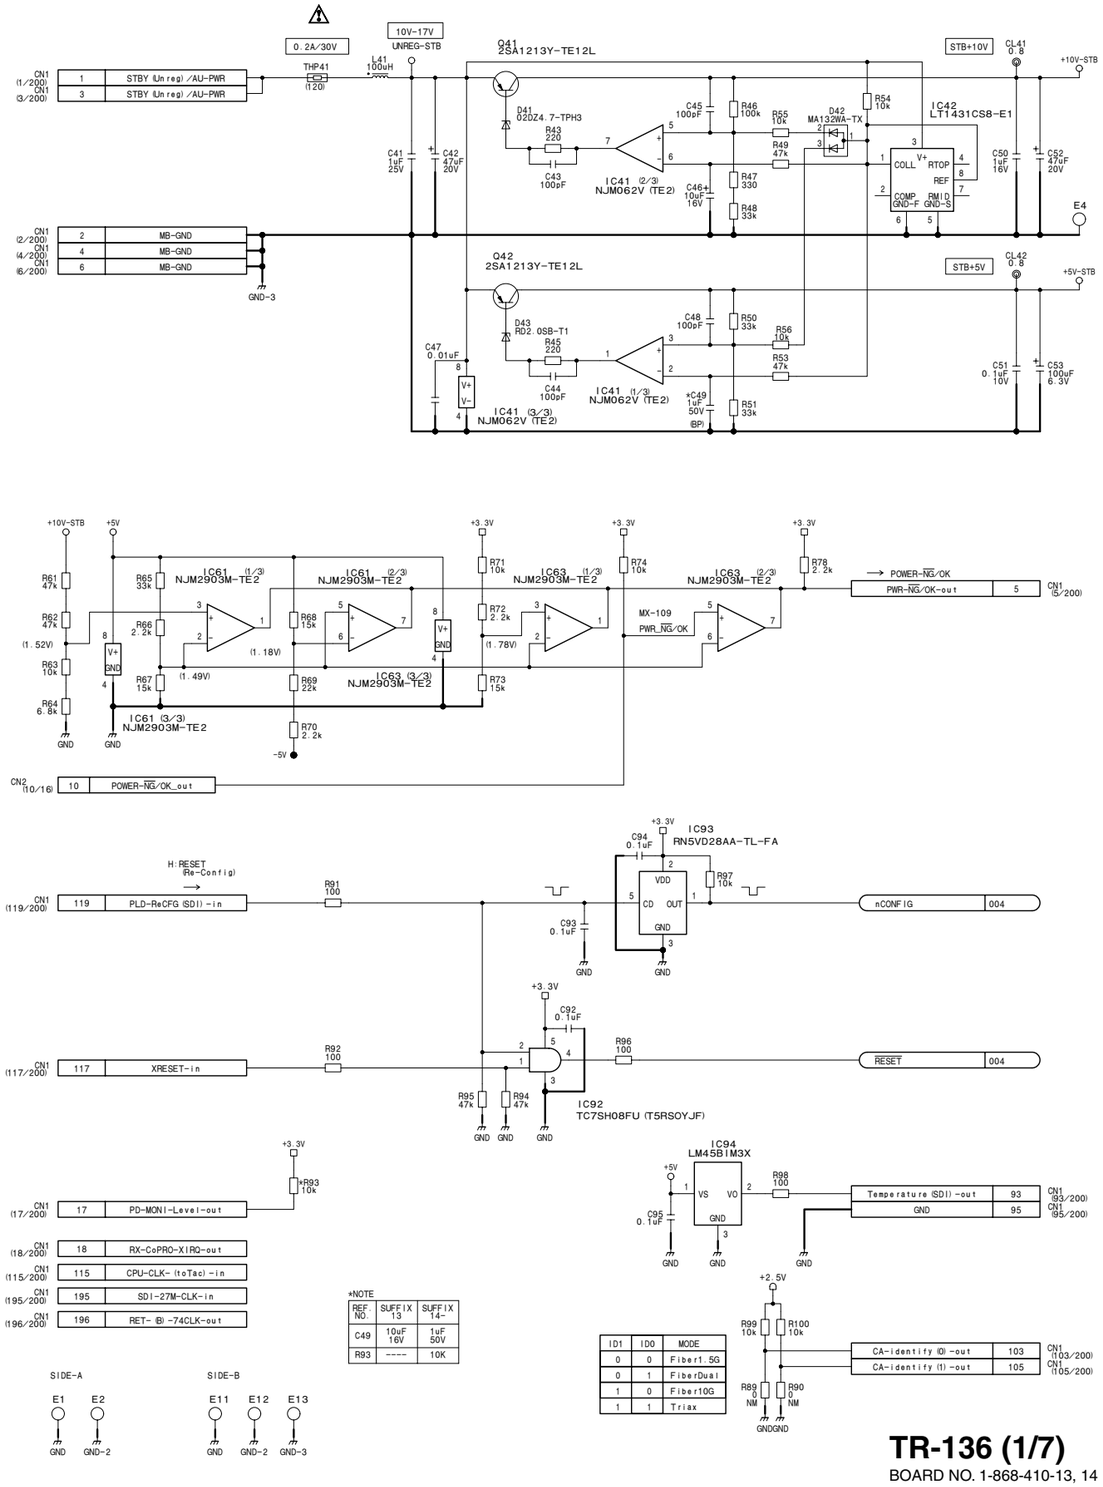

*NOTE

REF. NO.	SUFFIX 13	SUFFIX 14
C49	10uF 16V	1uF 50V
R93	----	10K

ID1	ID0	MODE
0	0	Fiber1.5G
0	1	FiberDual
1	0	Fiber10G
1	1	Triax


TR-136 (1/7)

BOARD NO. 1-868-410-13, 14


HDC1550_TR-136_014_1

4-126

TR-136 (2/7)
SUFFIX: -13, 14

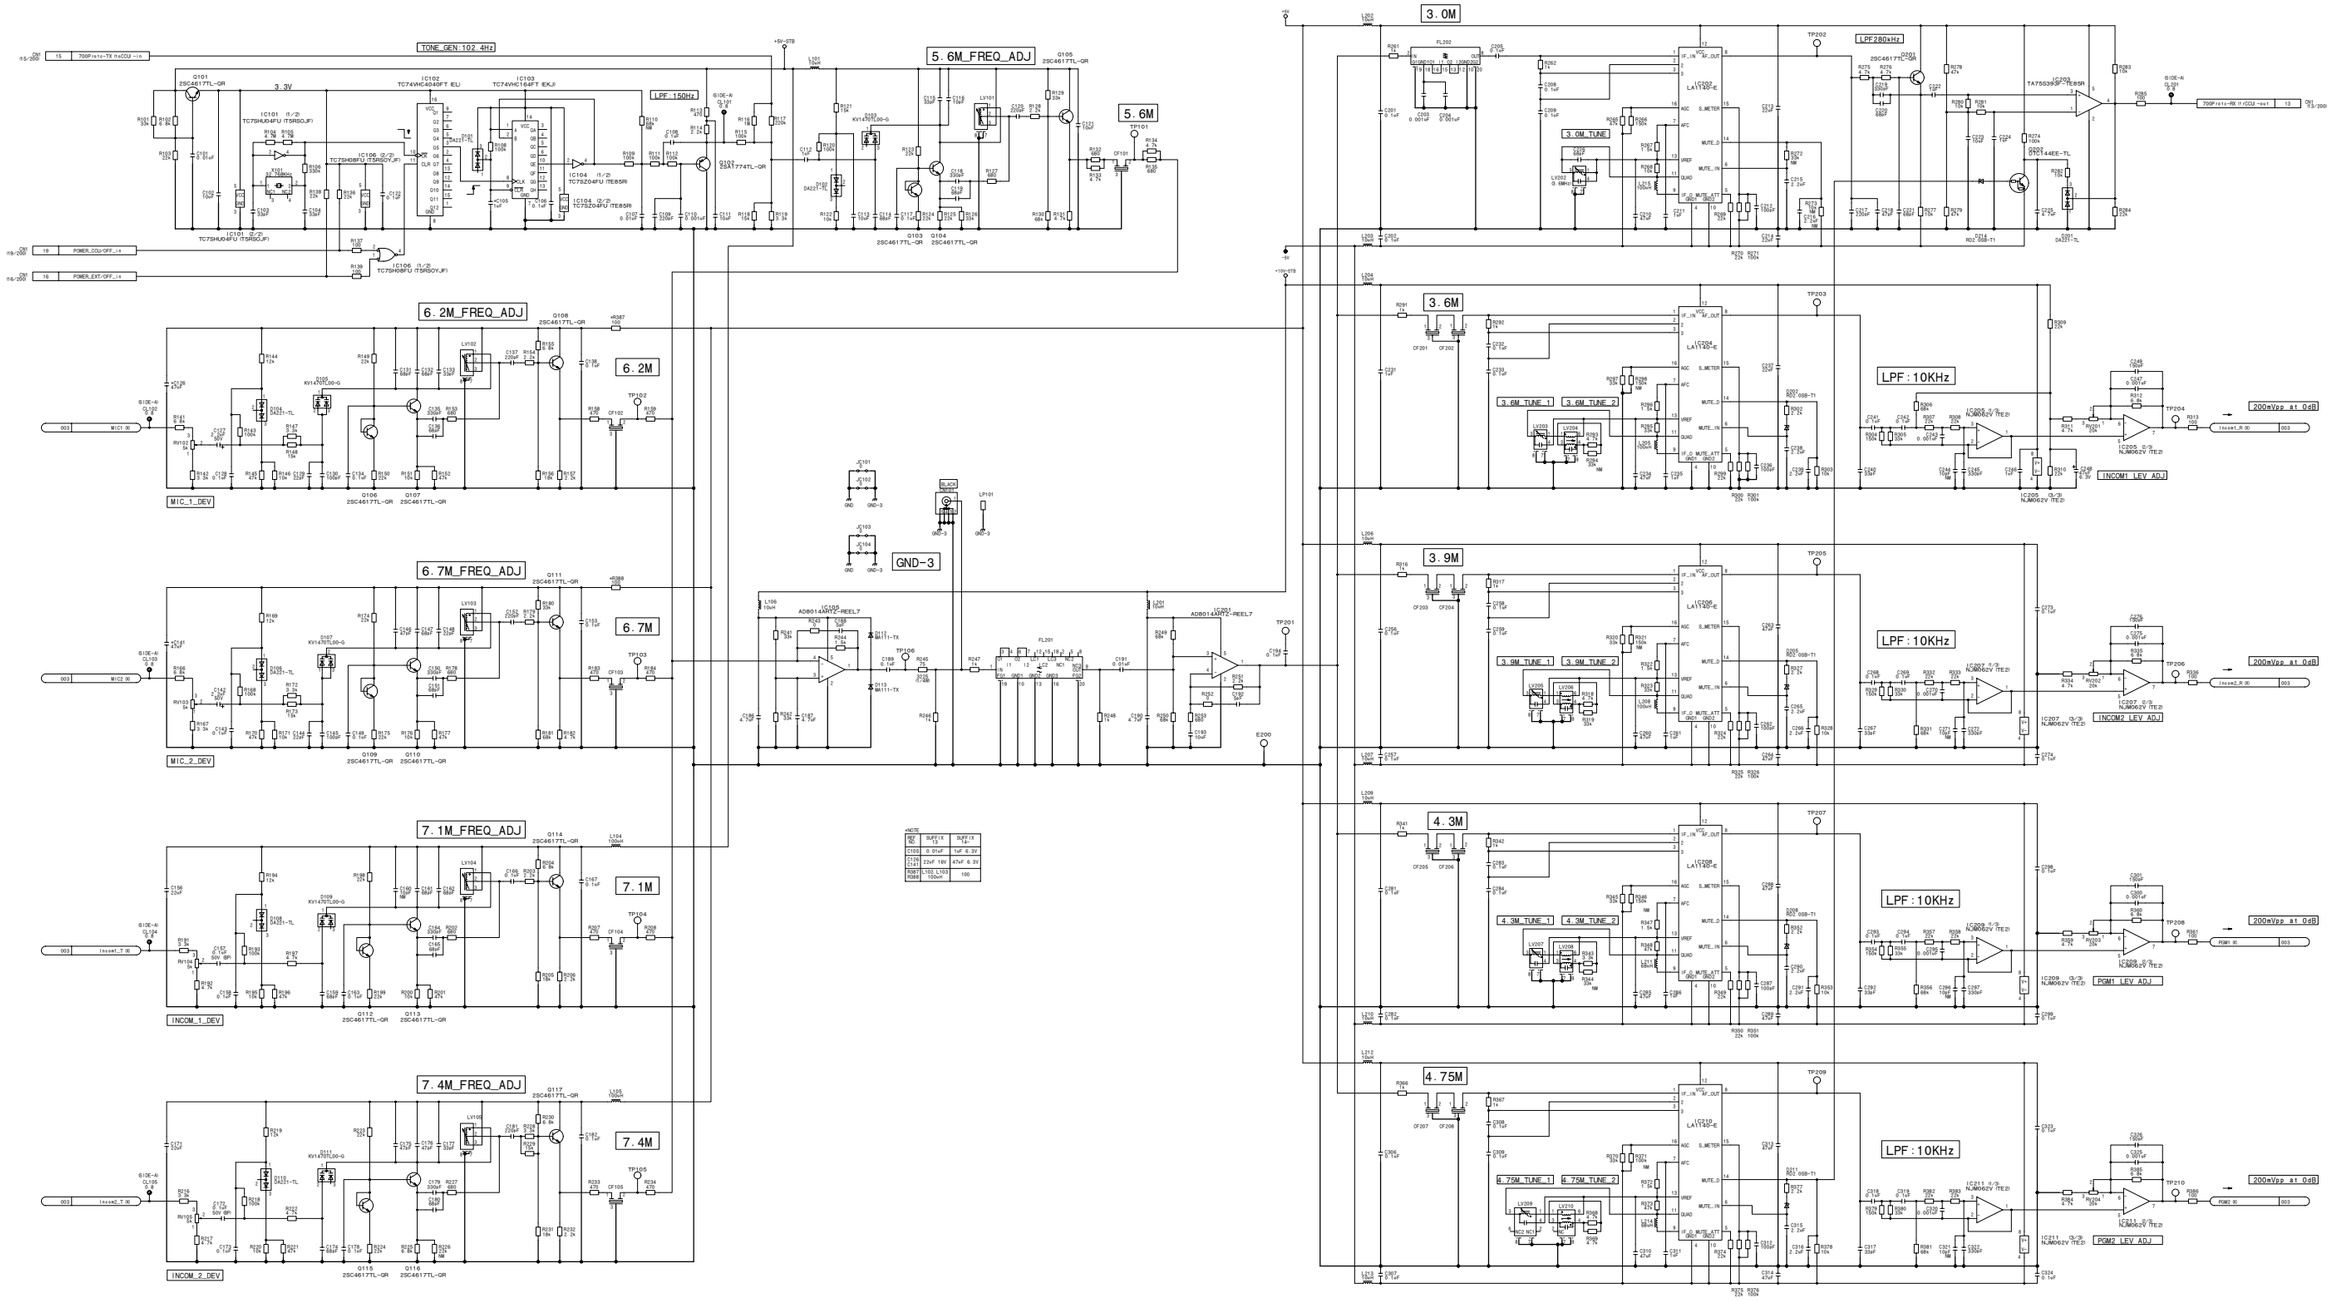


TR-136 (3/7)
SUFFIX: -13, 14

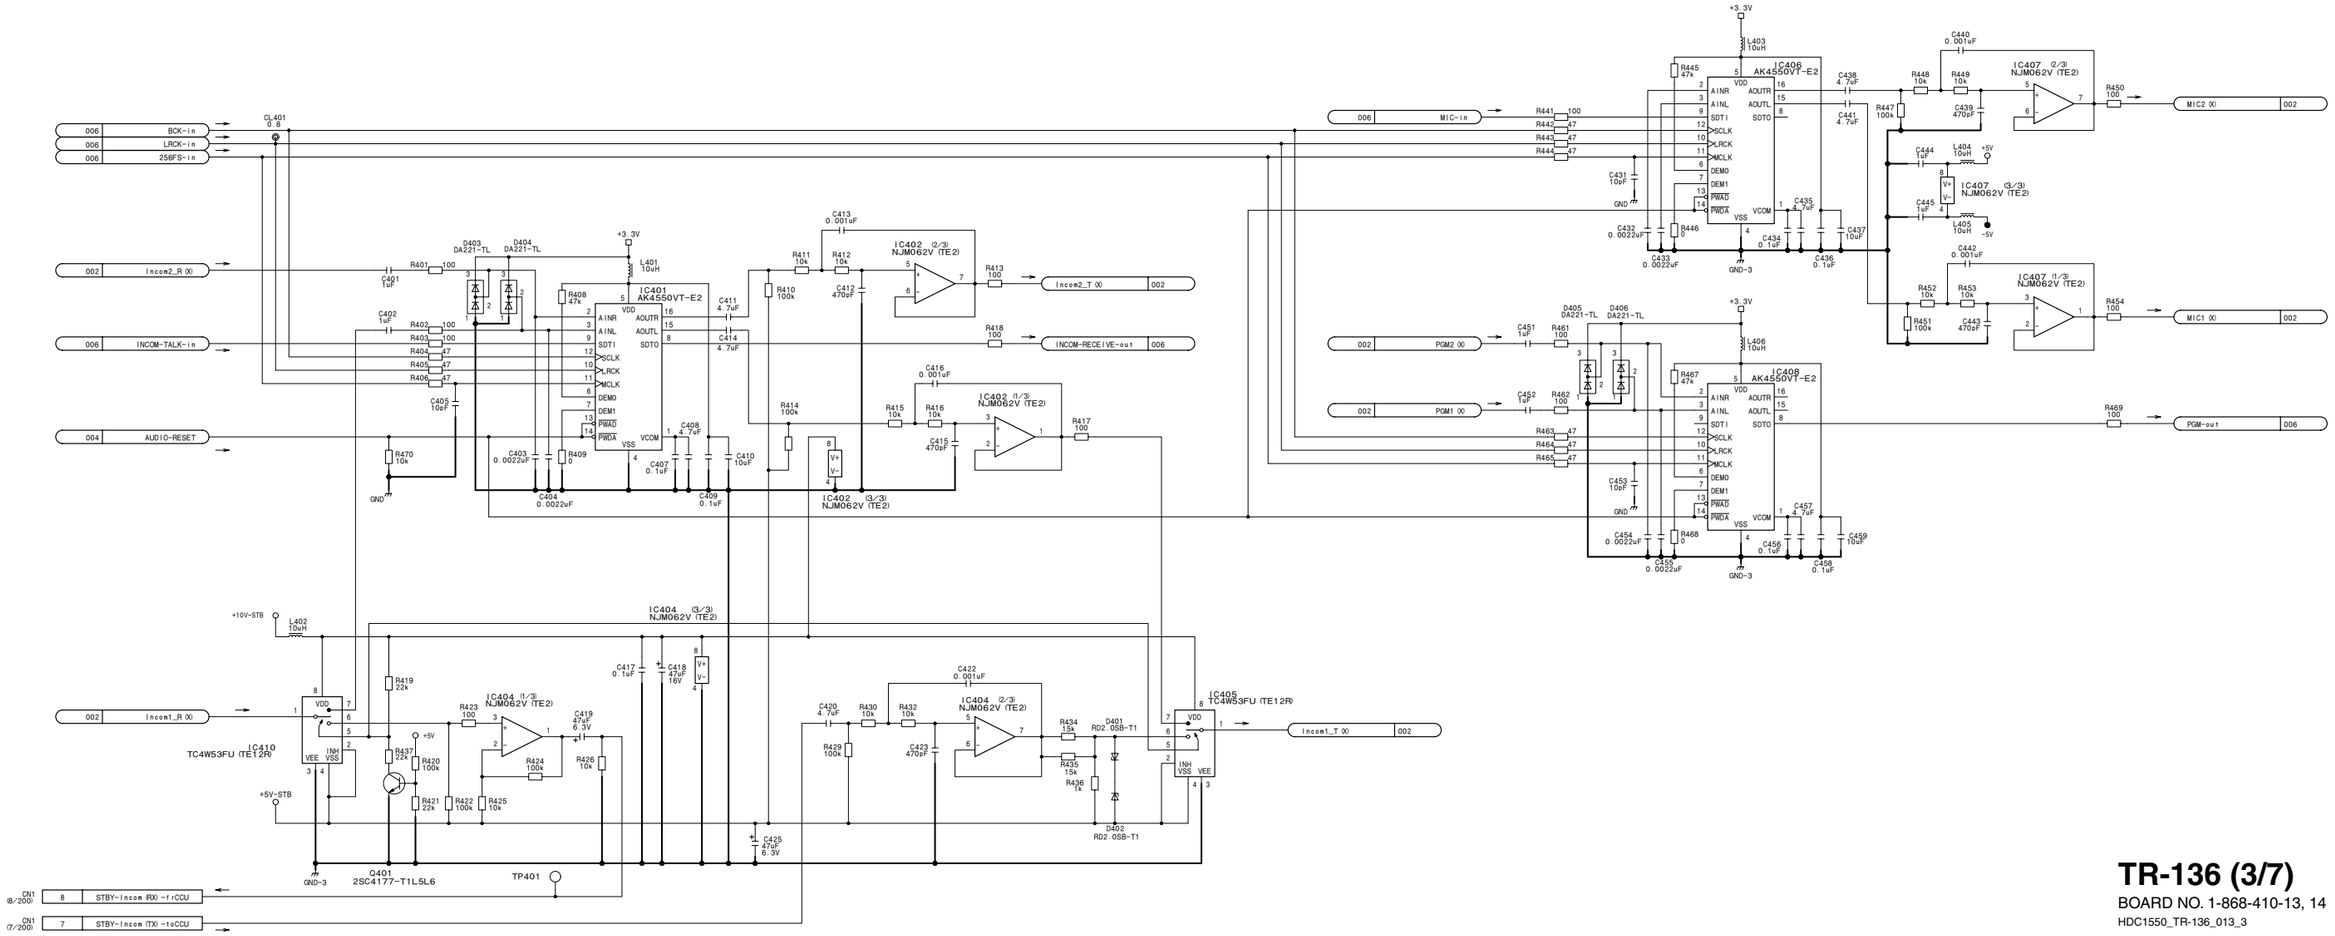

4-128

TR-136 (3/7)
BOARD NO. 1-868-410-13, 14
HDC1550_TR-136_013_3

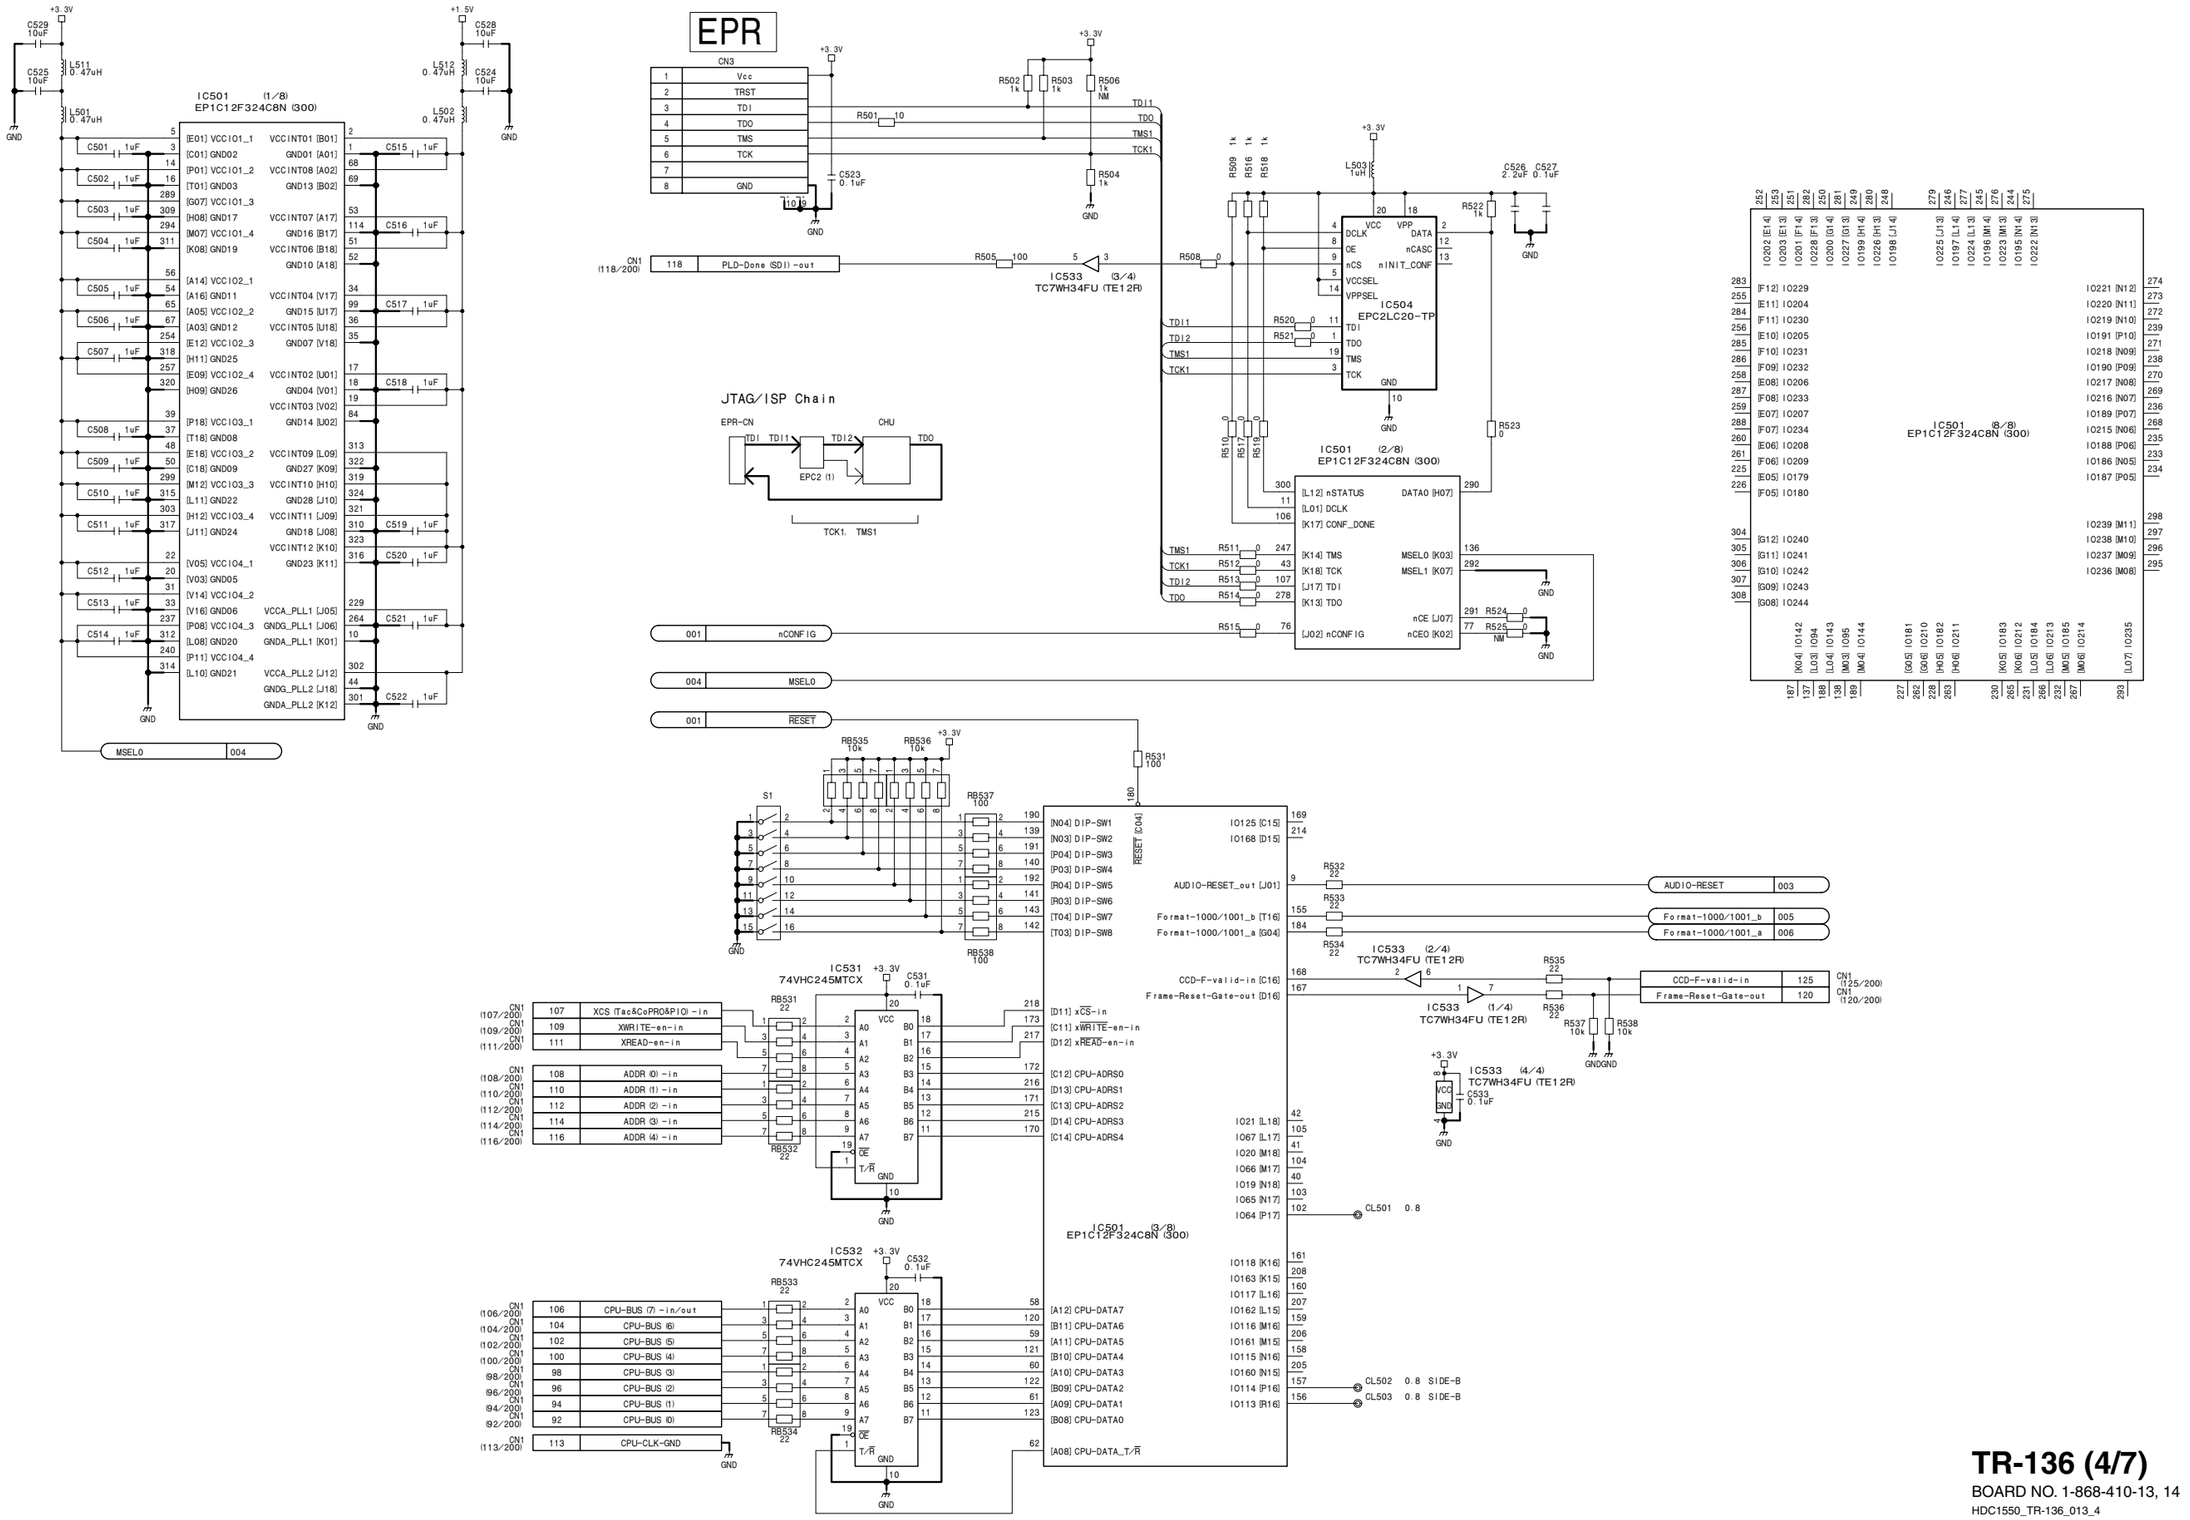

TR-136 (4/7)

BOARD NO. 1-868-410-13, 14

HDC1550_TR-136_013_4

CHU Video Clock ／ PLL

004 Format-1000/1001_b

IC501 (4/8) EP1C12F324C8N (300)

006 F-DET-SYNC-in — R547 100 — 131 [E03] F-DET-SYNC-in
006 SYNC-in — R548 100 — 182 [E04] SYNC-in
005 CHU-HD-F-IN — R549 100 — 130 [D03] CHU-HD-F-in
005 CHU-HD-H-IN — R550 100 — 129 [C03] CHU-HD-H-in

006 74M-PLL-CLK — R544 22 — 135 [J03] CK0-PLL74MHz
005 CHU-74MHz — R545 22 — 186 [J04] CK1-CHU74MHz
005 PLL_129.6MHz-CLK — 209 [J15] CK2-129.6MHz
005 86.4MHz-CLK — R542 22 — 162 [J16] CK3-86.4MHz

R551 2.2k, R552 2.2k, R543 2.2k, R546 2.2k

[P15] IO159, [R15] IO158, [T15] IO111, [P14] IO194, [R14] Y-DA-CK129.6M, [T14] IO110, [P13] IO193, [R13] IO156, [T13] IO109, [P12] IO192, [R12] C-DA-CK86.4M, [T12] IO108, [R11] IO154, [T11] IO107

IO137 [D04]
PLL-H_out [F03] — PLL-H-out — 006
REF-H_out [F04] — REF-H-out — 006
74.25/55=1.35M [R18]
129.6/96=1.35M [R17]
86.4/64=1.35M [T17]

R553 10, R554 10, R559 10, R558 10, R562 10k, R564 1k, R549 10k, R557 1k NM, C542 10pF, R556 2.2k, C541 10pF, R555 2.2k, C549 10000pF, C550 10000pF

*IC541 TLC2932AIPWR — L542 100uH, C547 22uF, C548 0.1uF
*IC542 TLC2932AIPWR — L543 100uH, C552 22uF, C553 0.1uF
LVDD VCOVDD FIN-A PFDOUT FIN-B PFDINH VCOIN VCOOUT RBIAS VCOINH SELECT TEST LGND VCOGND

*NOTE

REF. NO.	SUFFIX 13	SUFFIX 14-
IC541 IC542	TLC2934 1PWR	TLC2932A 1PWR

+3.3V-1

IC543 (1/3) TLC272CPWR-12 — R567 47k, R568 0, R569 47k, R573 1k, R575 1k, R577 10k, C557 10000pF, D541 RD3.3SB-T1
IC543 (2/3) TLC272CPWR-12 — R570 47k, R571 0, R572 47k, R574 1k, R576 1k, R578 10k, C558 10000pF, D542 RD3.3SB-T1
IC543 (3/3) TLC272CPWR-12 — C556 0.1uF

L541 1uH, C544 105pF, C543 47uF 6.3V, R563 1k NM, C546 10pF, R560 2.2k, C561 2.2k, C554 10uF, C555 10000pF

R610 22

Q541 2SC4617TL-QR — R579 47k, R580 47k, R581 2.2k
Q542 2SA1774TL-QR — R583 10k, R584 2.2k
Q543 2SA1774TL-QR — R586 10k, C560 0.1uF, C562 22uF, L546 0.47uH

X544 129.471MHz — C564 0.1uF, R590 100, L548 0.22uH, C563 0.1uF, R592 10k — 129.47053MHz
X543 129.600MHz — R589 100, C566 0.1uF, R591 10k — 129.6MHz
X542 86.314Hz — L545 0.68uH, C561 0.1uF, R585 100, R588 10k — 86.313686MHz
X541 86.400MHz — L544 0.68uH, C559 0.1uF, R582 100, R587 10k — 86.4MHz

IC546 (1/2) TC7SZ32FU (TE85R) — R541 22, R611 22 — PLL_129.6MHz-CLK 005, DAC_129.6MHz-CLK 005
IC546 (2/2) TC7SZ32FU (TE85R) — C566 0.1uF
IC545 TC7W53FU (TE12R) — C565 0.1uF, R593 10 — 86.4MHz-CLK 005

CHU Video Proc.

IC501 (5/8) EP1C12F324C8N (300)

[D07] CHU-C8-in
[C07] CHU-Y0-in
[D08] CHU-Y2-in
[C08] CHU-Y4-in
[D09] CHU-Y6-in
[C09] CHU-Y8-in
[D10] CHU-Y7-in
[C10] CHU-Y9-in
[B07] CHU-Y5-in
[A07] CHU-Y3-in
[B06] CHU-Y1-in
[A06] CHU-C9-in
[B05] CHU-C7-in
[B04] CHU-C5-in
[A04] CHU-C3-in
[B03] CHU-C1-in
[D05] CHU-C0-in
[C05] CHU-C2-in
[D06] CHU-C4-in
[C06] CHU-C6-in

MainY_0out [U10]
MainY_1out [V10]
MainY_2out [U11]
MainY_3out [V11]
MainY_4out [U12]
MainY_5out [V12]
MainY_6out [U13]
MainY_7out [V13]
MainY_8out [U14]
MainY_9out [U15]
MainY10out [V15]
MainY11out [U16]
MainC_0out [U03]
MainC_1out [U04]
MainC_2out [V04]
MainC_3out [U05]
MainC_4out [U06]
MainC_5out [V06]
MainC_6out [U07]
MainC_7out [V07]
MainC_8out [U08]
MainC_9out [V08]
MainC10out [U09]
MainC11out [V09]

RB618 220, RB619 220, RB620 220, RB621 220, RB622 220, RB623 220, RB624 2.2k, RB625 2.2k, RB626 2.2k

IC605 DAC902E/2K5 — L601 0.47uH, L603 0.47uH, C607 10uF, C611 0.1uF, C605 0.1uF, R614 150, R659 150, C613 22uF, C617 0.1uF, C609 0.1uF, R615 1k, R620 1k, C614 0.1uF, C618 10uF, R628 1k, C621 0.1uF, R660 1k, R630 470, RV601 5k CHU-Y-LVL
IC606 DAC902E/2K5 — L602 1uH, L604 1uH, C608 10uF, C612 0.1uF, C606 0.1uF, R616 330, R617 2.2k, R621 1k, C615 22uF, C619 0.1uF, C610 0.1uF, C616 0.1uF, C620 10uF, R629 1k, C622 0.1uF, R661 1k, R631 470, RV602 5k CHU-C-LVL

IC602 SN74LVC574APWR — C602 0.1uF, RB607 22, RB613 22, R609 2.2k
IC603 SN74LVC574APWR — C603 0.1uF, RB609 22, RB615 22, RB610 22
IC604 SN74LVC574APWR — C604 0.1uF, RB611 22, RB617 22, RB612 22

CHU-74M TP601, CHU-H TP602, CHU-F TP603 — R601 100, R602 100, R605 100

CN1 62 MAIN-B-Y (9)-in — RB601 10k
CN1 60 MAIN-B-Y (7)
CN1 58 MAIN-B-Y (5)
CN1 56 MAIN-B-Y (3)
CN1 54 MAIN-B-Y (1) — RB602 10k
CN1 52 MAIN-B-Cd (9)-in
CN1 50 MAIN-B-Cd (7)
CN1 48 MAIN-B-Cd (5)
CN1 46 MAIN-B-Cd (3) — RB603 10k
CN1 44 MAIN-B-Cd (1)
CN1 61 MAIN-B-Y (8)-in — RB604 10k
CN1 59 MAIN-B-Y (6)
CN1 57 MAIN-B-Y (4)
CN1 55 MAIN-B-Y (2)
CN1 53 MAIN-B-Y (0) — RB605 10k
CN1 51 MAIN-B-Cd (8)-in
CN1 49 MANI-B-Cd (6)
CN1 47 MAIN-B-Cd (4)
CN1 45 MAIN-B-Cd (2) — RB606 10k
CN1 43 MAIN-B-Cd (0)

CN1 77 MAIN-A-Cd (8)-in — RB607 22
CN1 79 MAIN-A-Y (0)
CN1 81 MAIN-A-Y (2)
CN1 83 MAIN-A-Y (4)
CN1 85 MAIN-A-Y (6)
CN1 87 MAIN-A-Y (8)-in
CN1 86 MAIN-A-Y (7) — RB608 22
CN1 88 MAIN-A-Y (9)-in
CN1 84 MAIN-A-Y (5) — RB609 22
CN1 82 MAIN-A-Y (3)
CN1 80 MAIN-A-Y (1)
CN1 78 MAIN-A-Cd (9)-in — RB610 22
CN1 76 MAIN-A-Cd (7)
CN1 74 MAIN-A-Cd (5)
CN1 72 MAIN-A-Cd (3)
CN1 70 MAIN-A-Cd (1)
CN1 69 MAIN-A-Cd (0) — RB611 22
CN1 71 MAIN-A-Cd (2)
CN1 73 MANI-A-Cd (4)
CN1 75 MAIN-A-Cd (6)

CN1 67 MAIN-A-F-in — RB612 22
CN1 66 SDI-74CLK-in
CN1 63 MAIN-A-H-in
CN1 68 GND — R603 10
CN1 64 GND
CN1 65 CLK-GND — R604 2.2k

IC601 TC7WH04FU (TE12R) — C601 0.1uF, R606 10, R607 10, R608 2.2k NM, R662 2.2k, 74MHZ

RB613 22, RB614 22, RB615 22, RB616 22, RB617 22

CHU-HD-F-IN 005
CHU-HD-H-IN 005
CHU-74MHz 005

005 DAC_129.6MHz-CLK

CHU VIDEO Proc.

FILTER
Y Filtering->74MHz X Phase0.1
Time Base Collector (CLK/H)
R-Y Filtering->74MHz
B-Y Filtering->74MHz

Clock Rate Convert
Y:74MHz->129.6MHz
C:74MHz->86.4MHz
SYNC/REF-Pulse Add
Y/R-Y/B-Y Digital Modulation
VIDEO TG (each Format)
SkinGate/Zebra MIX
TRIAX TEST Signal Generate
TRIAX Carrier Generate (PLL)

Digital Modulator

+3.3V-2, +5V, +2.5V

+3.3V-2 — L609 100uH, C625 47uF 6.3V, C626 47uF 6.3V, L611 1uH
GND-2 — L610 1uH, R663 0, R664 0

L605 1uH, C627 47uF 6.3V, C631 0.1uF, R645 2.2k, R651 1k, C623 10000pF, R623 150, R655 150, C635 0.1uF, R643 470, R647 68k, R648 15k, C628 47uF 6.3V, C632 0.1uF, L606 1uH

FL601 — R632 0, R633 150, R636 150, R637 150, R640 150, R641 1k
IC607 LMH6732MFX/NOPB — R656 150
Y-RF TP604 — 3.0Vp-p — BLUE — CN601 — LP601


L607 1uH, C629 47uF 6.3V, C633 0.1uF, R646 1k, R652 0, C624 10000pF, R624 150, R654 100, R657 150, C636 0.1uF, R644 680, R649 68k, R650 15k, C630 47uF 6.3V, C634 0.1uF, L608 1uH

FL602 — R634 0, R635 330, R638 330, R639 0, R642 1k
IC608 LMH6732MFX/NOPB — R658 150
C-RF TP605 — 2.0Vp-p — RED — CN602 — LP602

-5V

TR-136 (5/7)
BOARD NO. 1-868-410-13, 14
HDC1550_TR-136_014_5

SYNC Phase Adjust

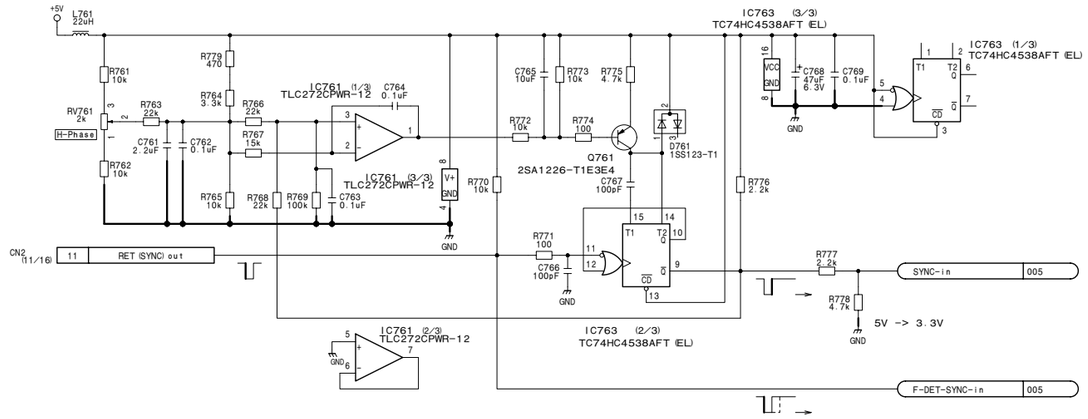

AUDIO PROCESS

Clock PLL (24.576MHz)

700/900mode Selector


Packet Assign

CHU -> CCU

	CH1/2	CH3/4	CH5/6	CH7/8
700	AES/EBU	TRUNK	MIC	INCOM
900	MIC	AES/EBU	INCOM	TRUNK

CCU -> CHU


	CH1/2	CH3/4	CH5/6	CH7/8
700	----	TRUNK	INCOM	PGM
900	PGM	----	INCOM	TRUNK

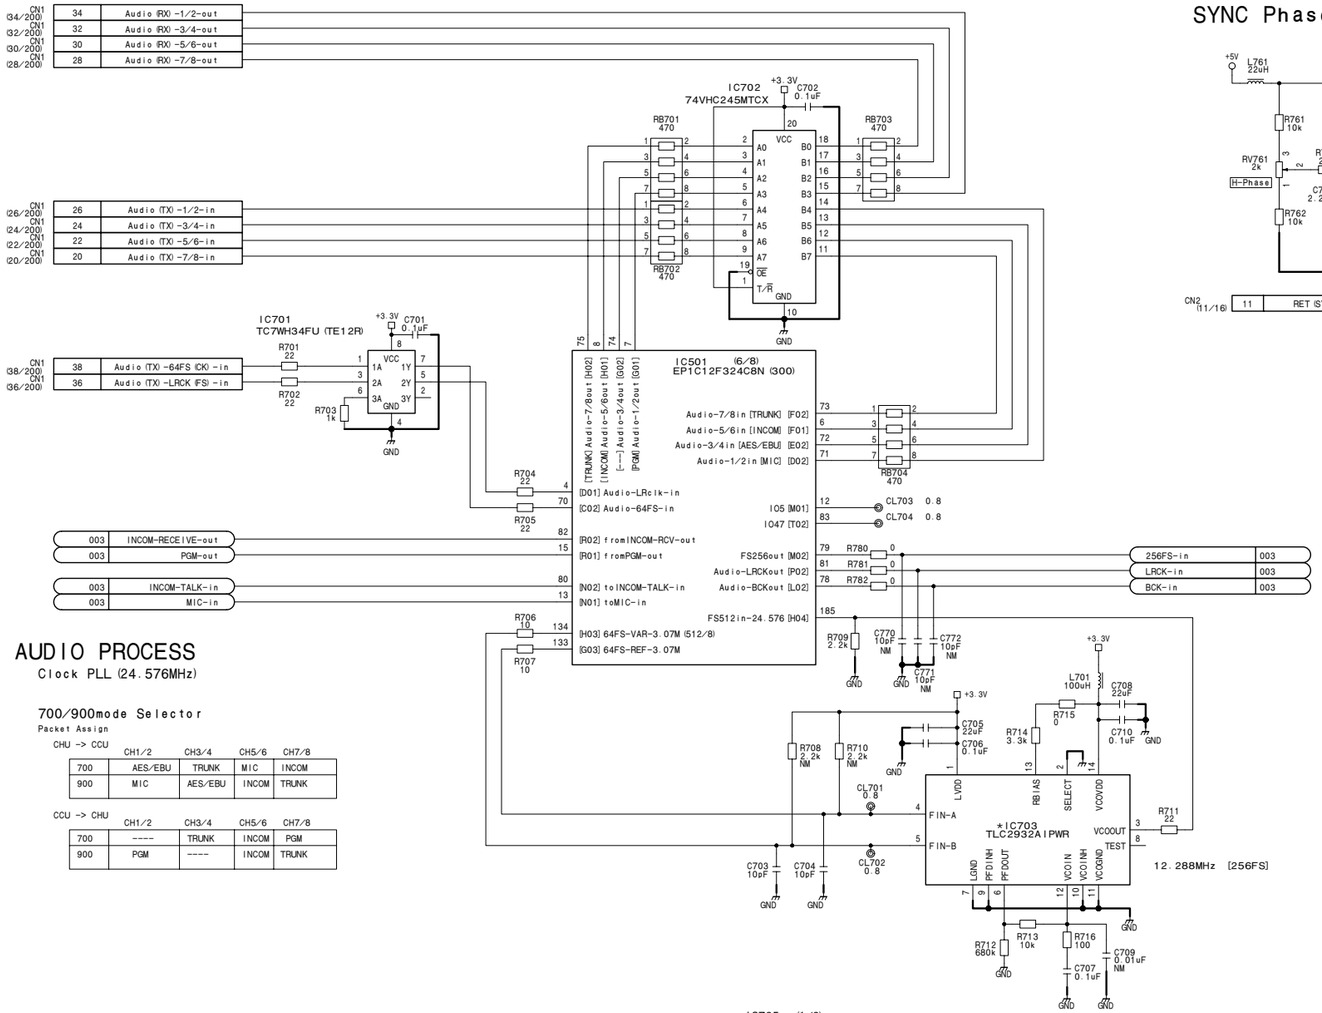

*NOTE

REF NO.	SUFFIX 13	SUFFIX 14~
IC703	TLC2932 IPW	TLC2932A IPWR

CCU 74M PLL

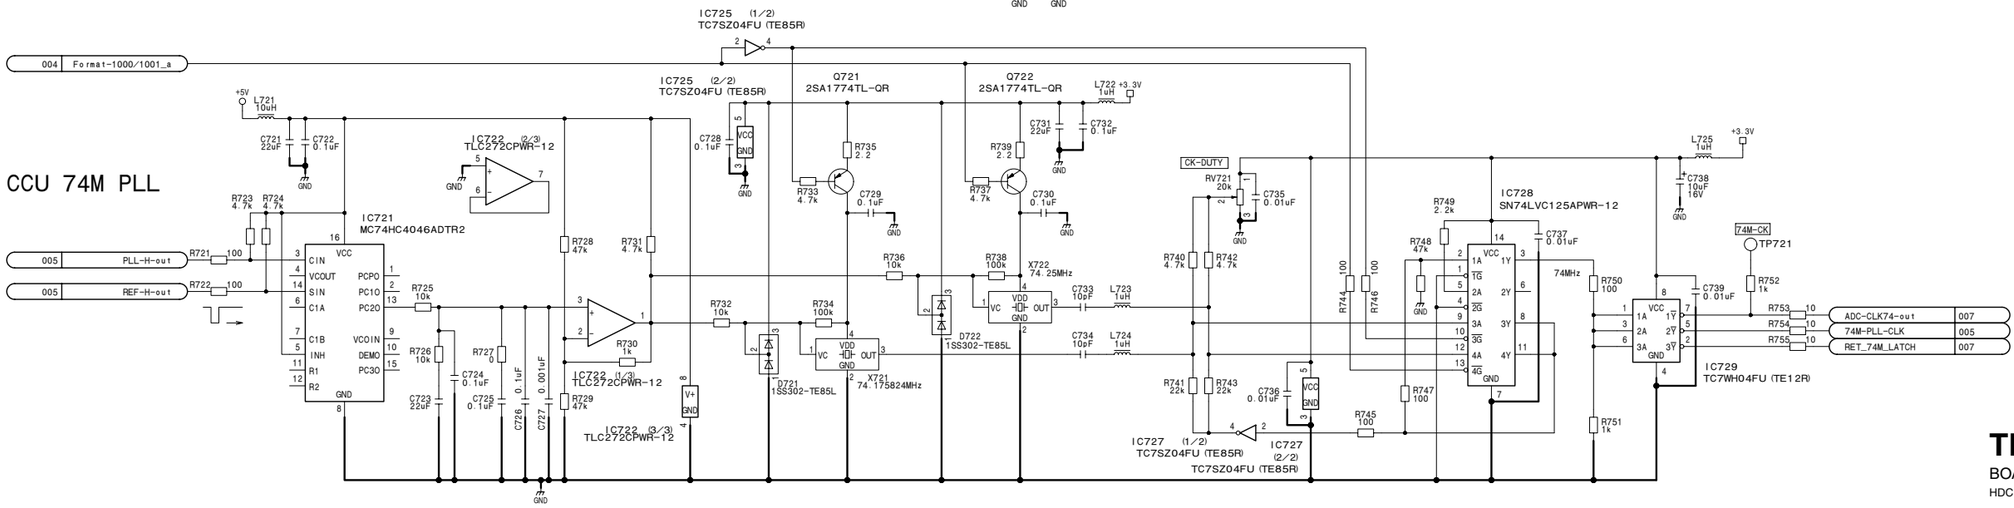

TR-136 (6/7)
BOARD NO. 1-868-410-13, 14
HDC1550_TR-136_014_6


RET-Y
from MX-109

PROMPTER
from MX-109

RET PROCESS
Blanker
VIDEO TG (each Format)

TR-136 (7/7)
BOARD NO. 1-868-410-13, 14
HDC1550_TR-136_013_7

VDA-63 (1/3)
SUFFIX: -12, 13

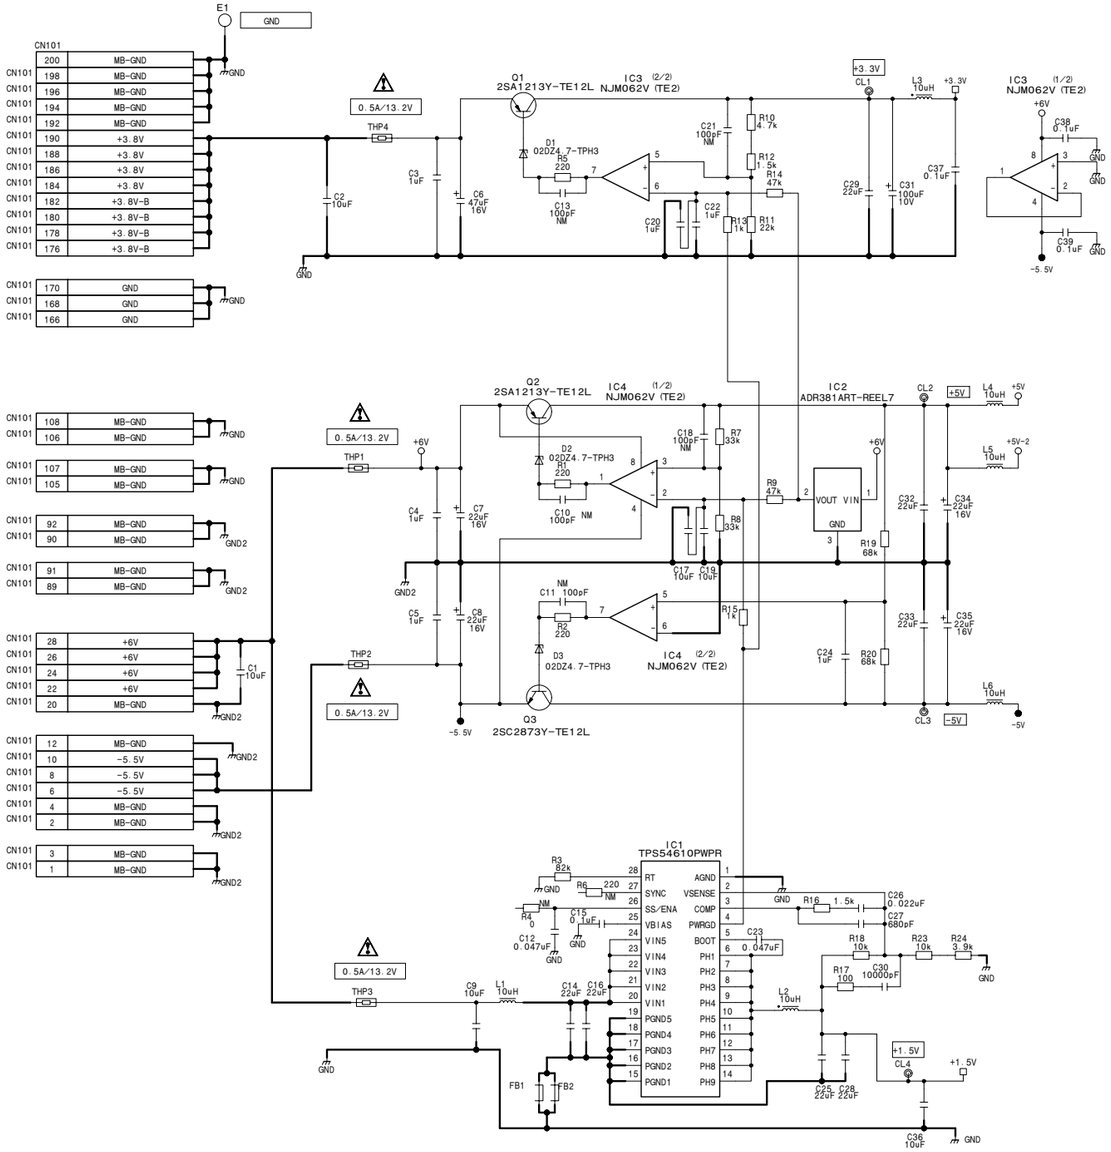


4-133

VDA-63 (1/3)


BOARD NO. 1-865-931-12, 13

HDC-1500_VDA-63_012_1


VDA-63 (2/3)
SUFFIX: -12, 13

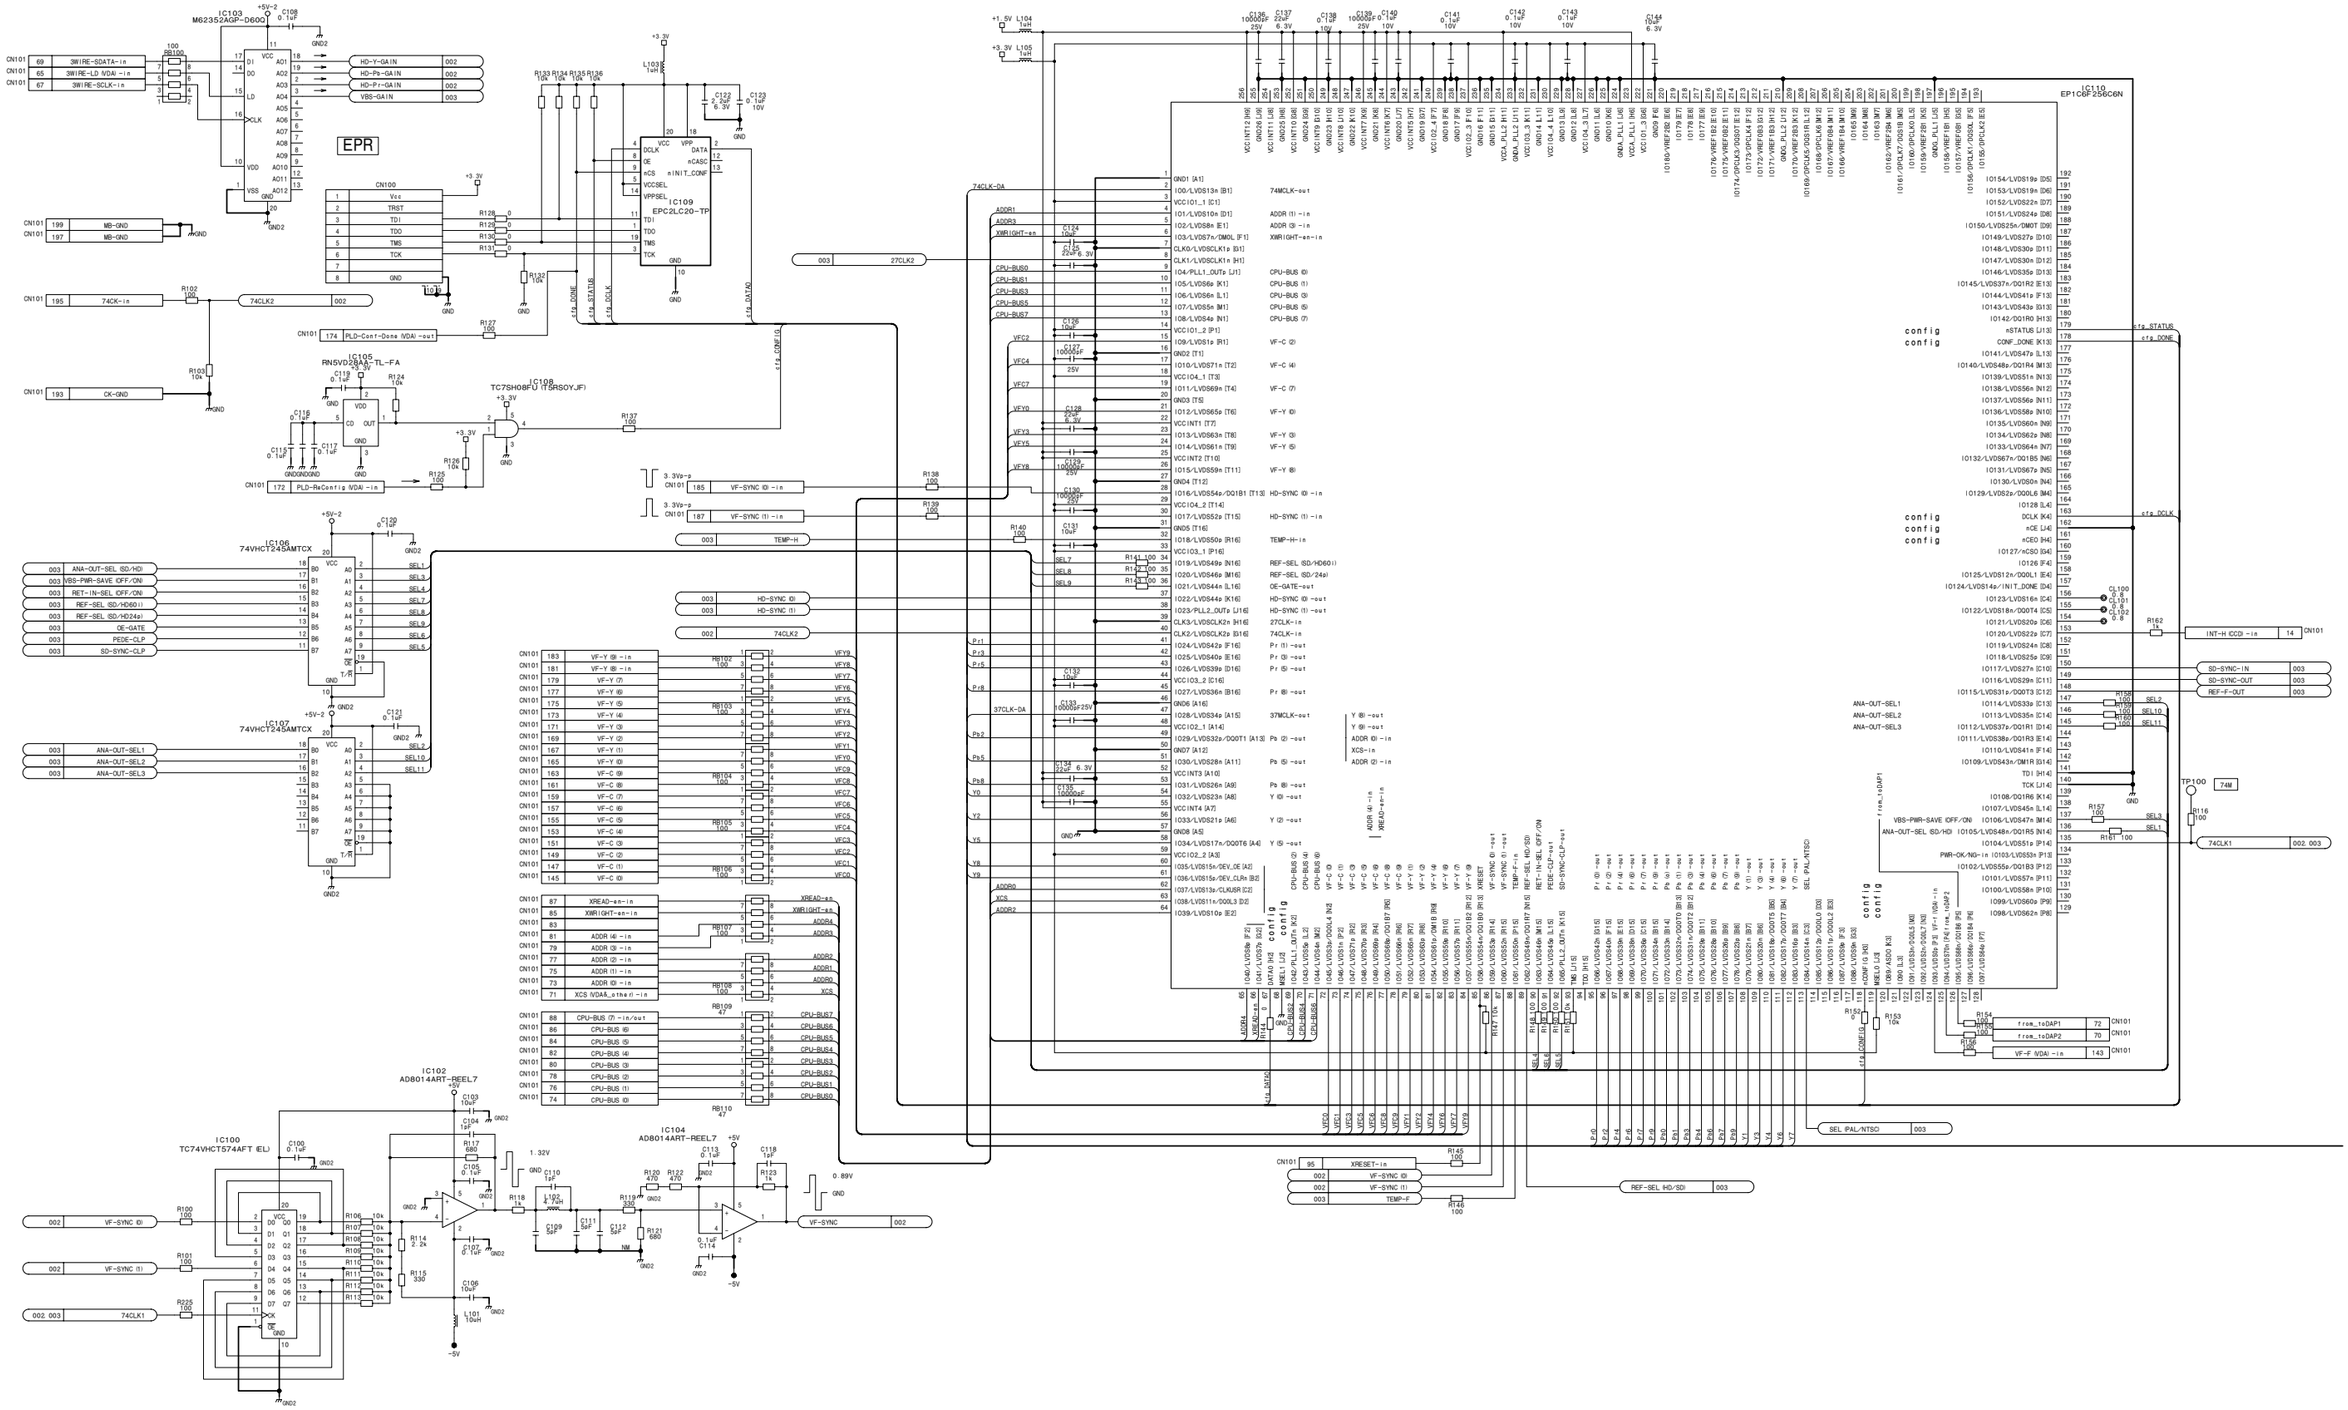

4-134

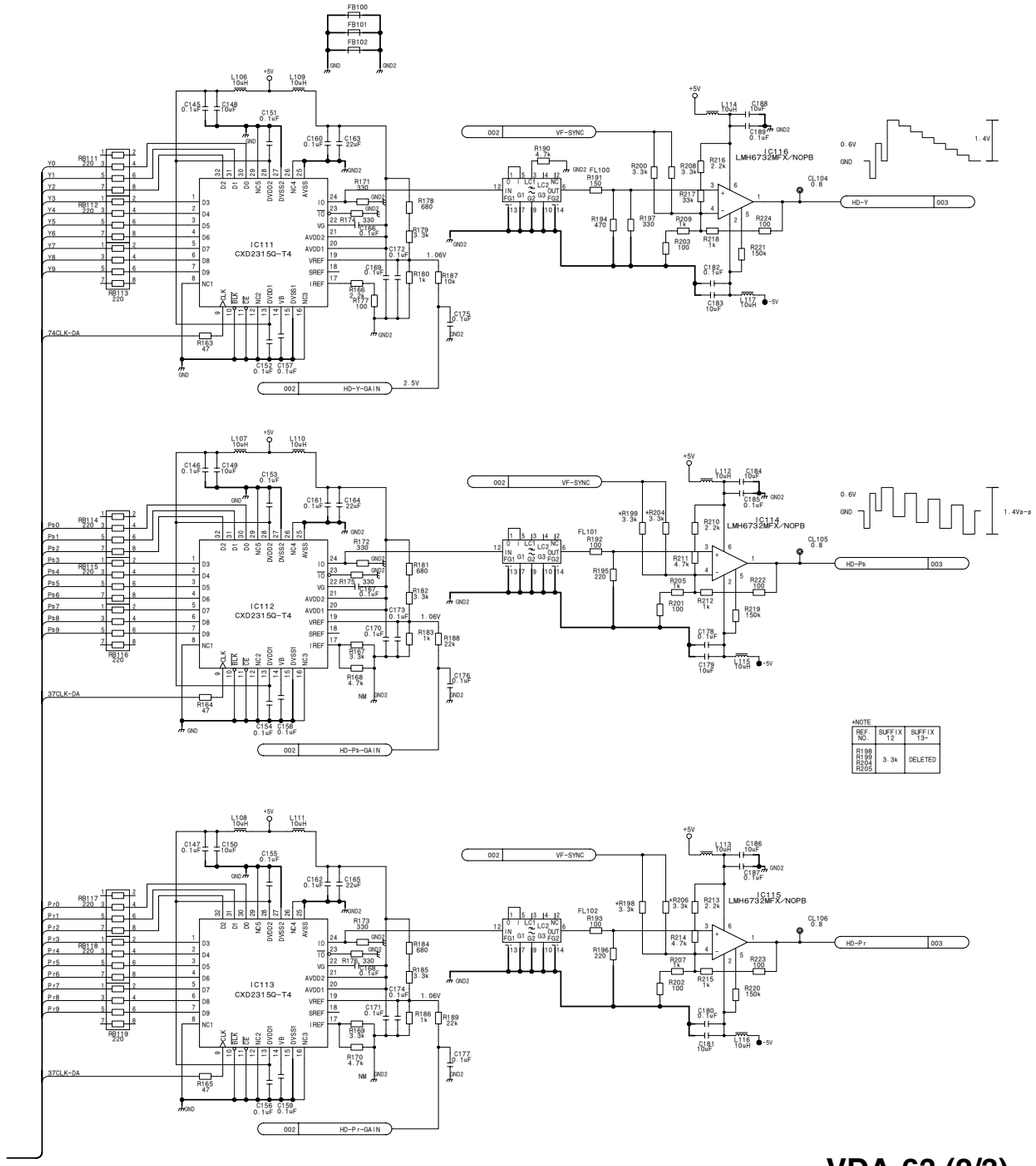
IC111
CXD2315Q-T4
IC112
CXD2315Q-T4
IC113
CXD2315Q-T4
IC114
LMH6732MFX-NOPB
IC115
LMH6732MFX-NOPB
IC116
LMH6732MFX-NOPB
002 VF-SYNC
002 HD-Y-GAIN
002 HD-Pb-GAIN
002 HD-Pr-GAIN
HD-Y 003
HD-Pb 003
HD-Pr 003
74CLK-DA
37CLK-DA
0.6V
1.4V
1.4Vs-a
1.06V
2.5V
GND
+5V
-5V
*NOTE
REF NO. | SUFFIX -12 | SUFFIX -13*
R198 R199 R204 R205 | 3.3k | DELETED


VDA-63 (3/3)
SUFFIX: -12, 13

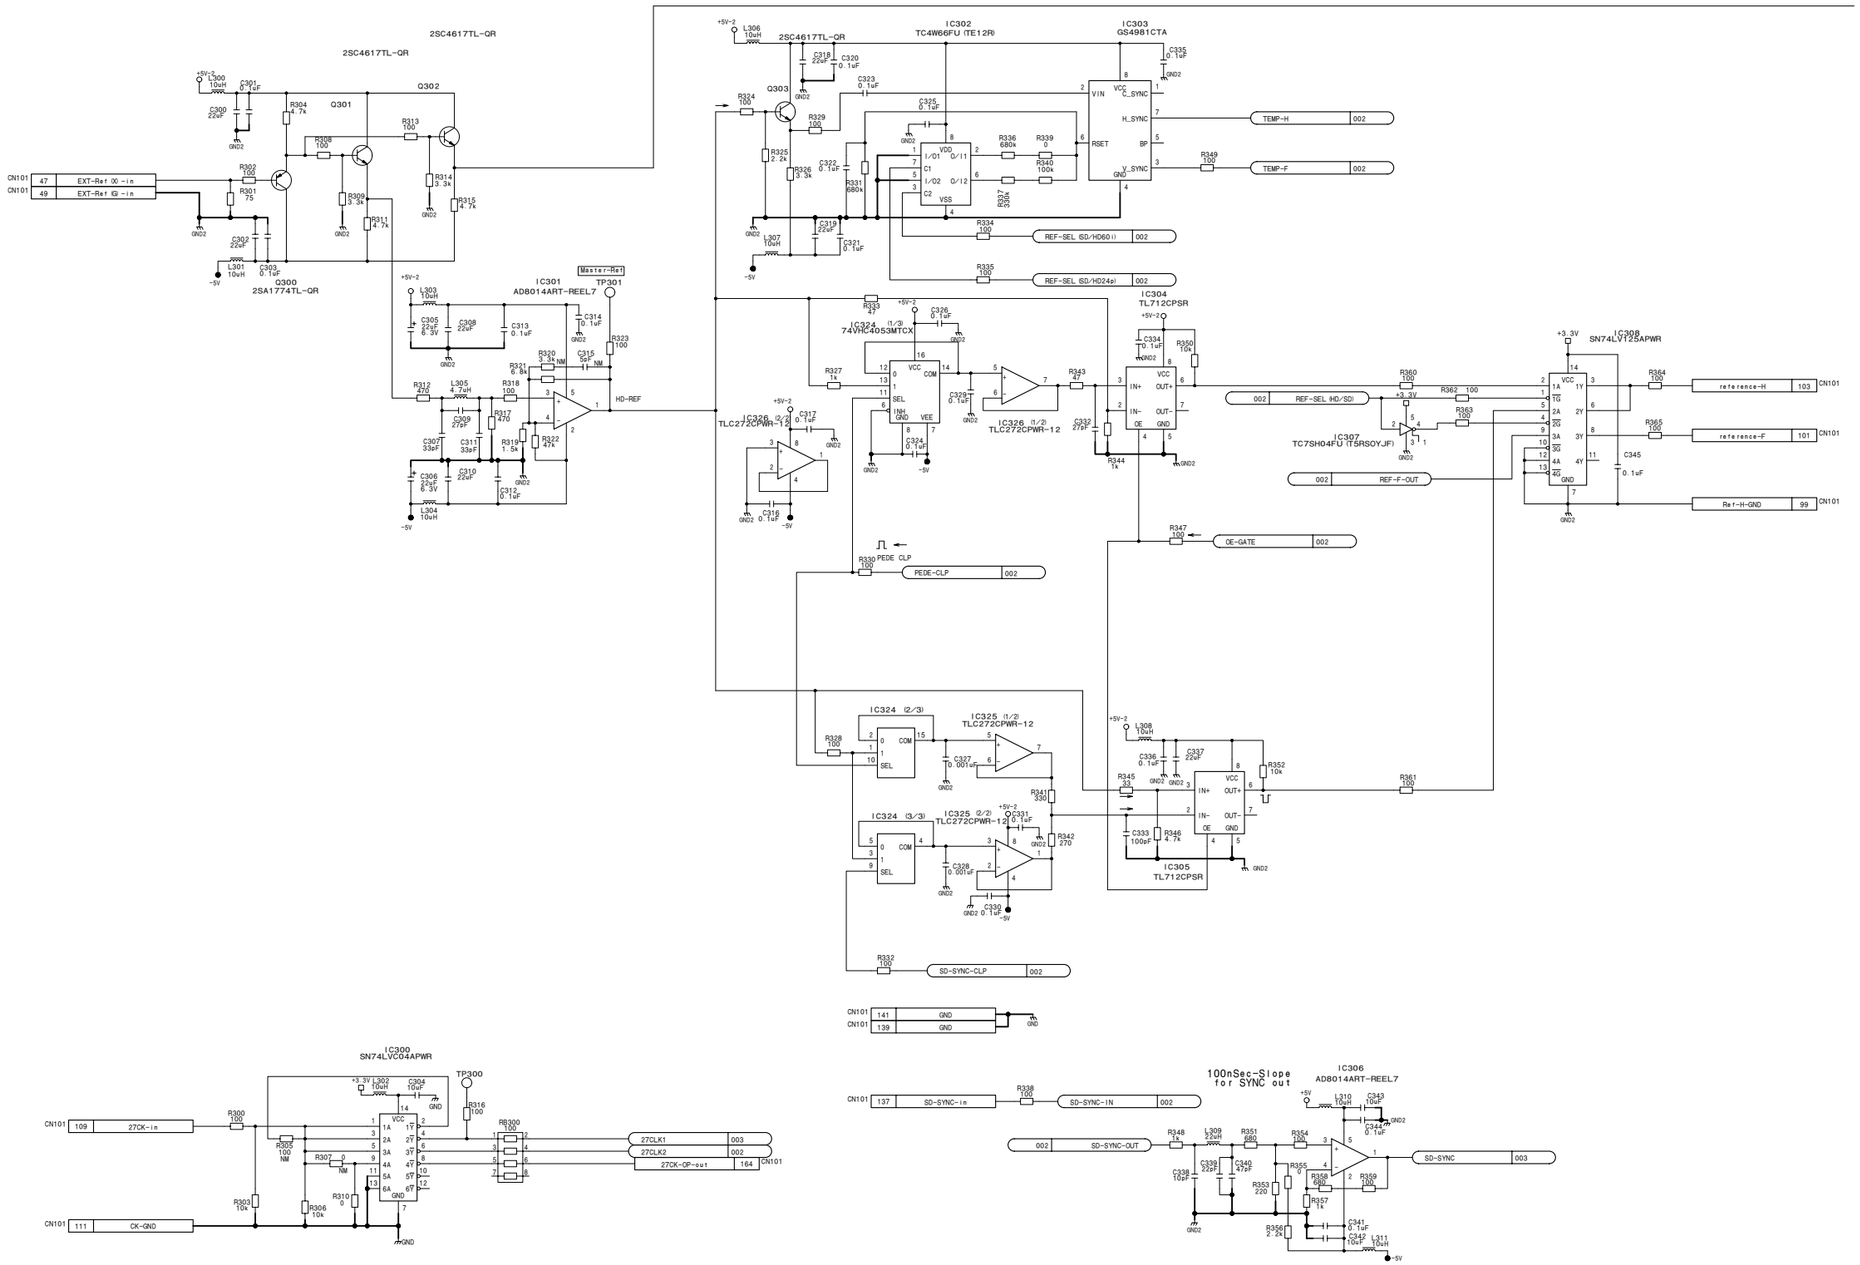

4-136


VDA-63 (3/3)
SUFFIX: -12, 13

VDA-63 (3/3)
SUFFIX: -12, 13

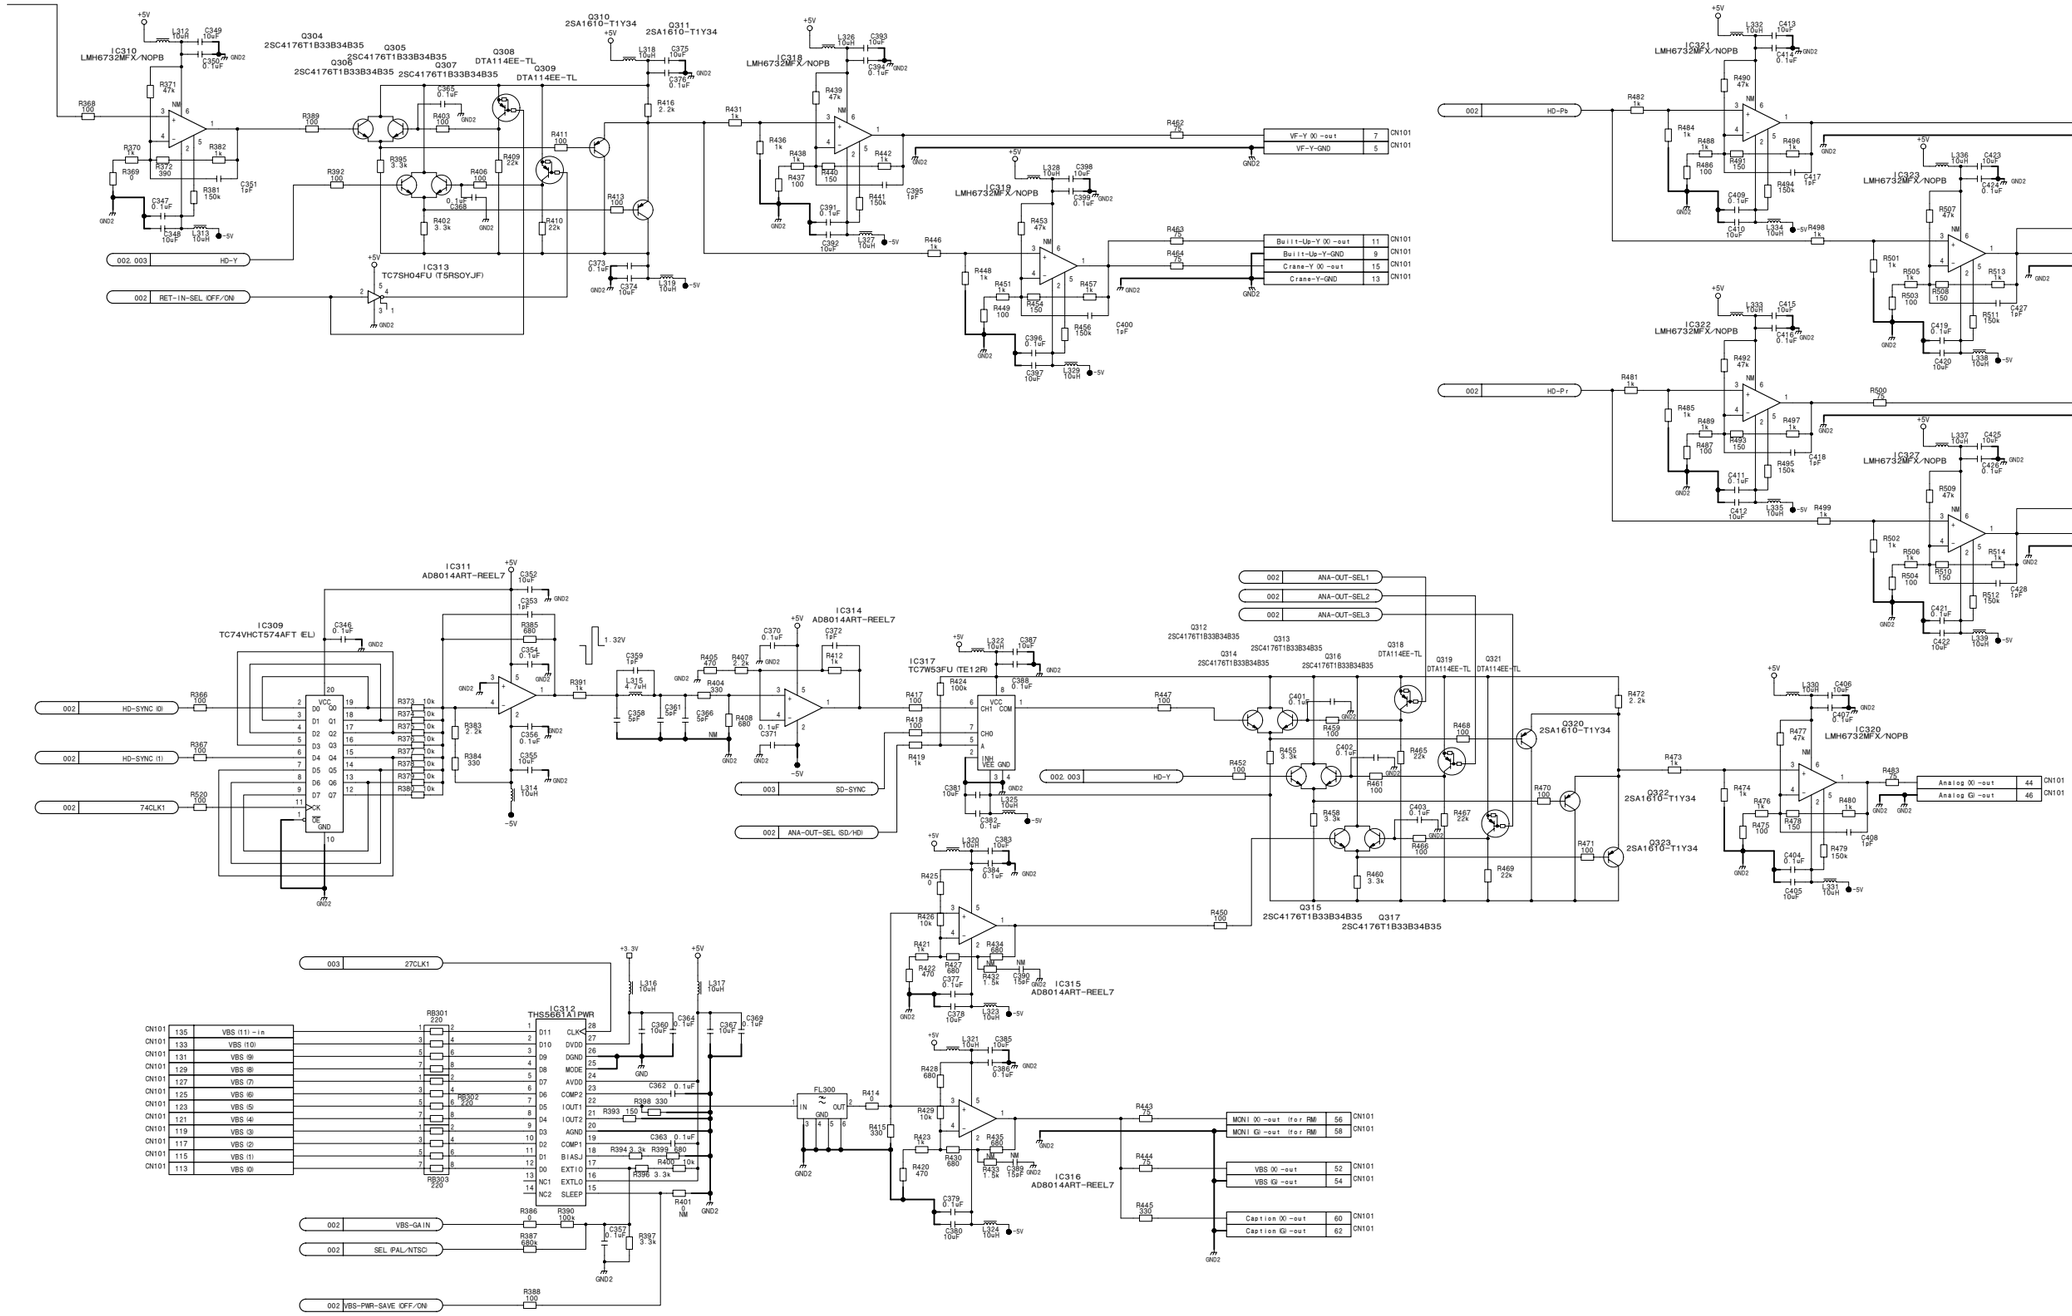


VDA-63 (3/3)
BOARD NO. 1-865-931-12, 13
HDC-1500_VDA-63_012_3

Frame Wiring HDC1000/1100

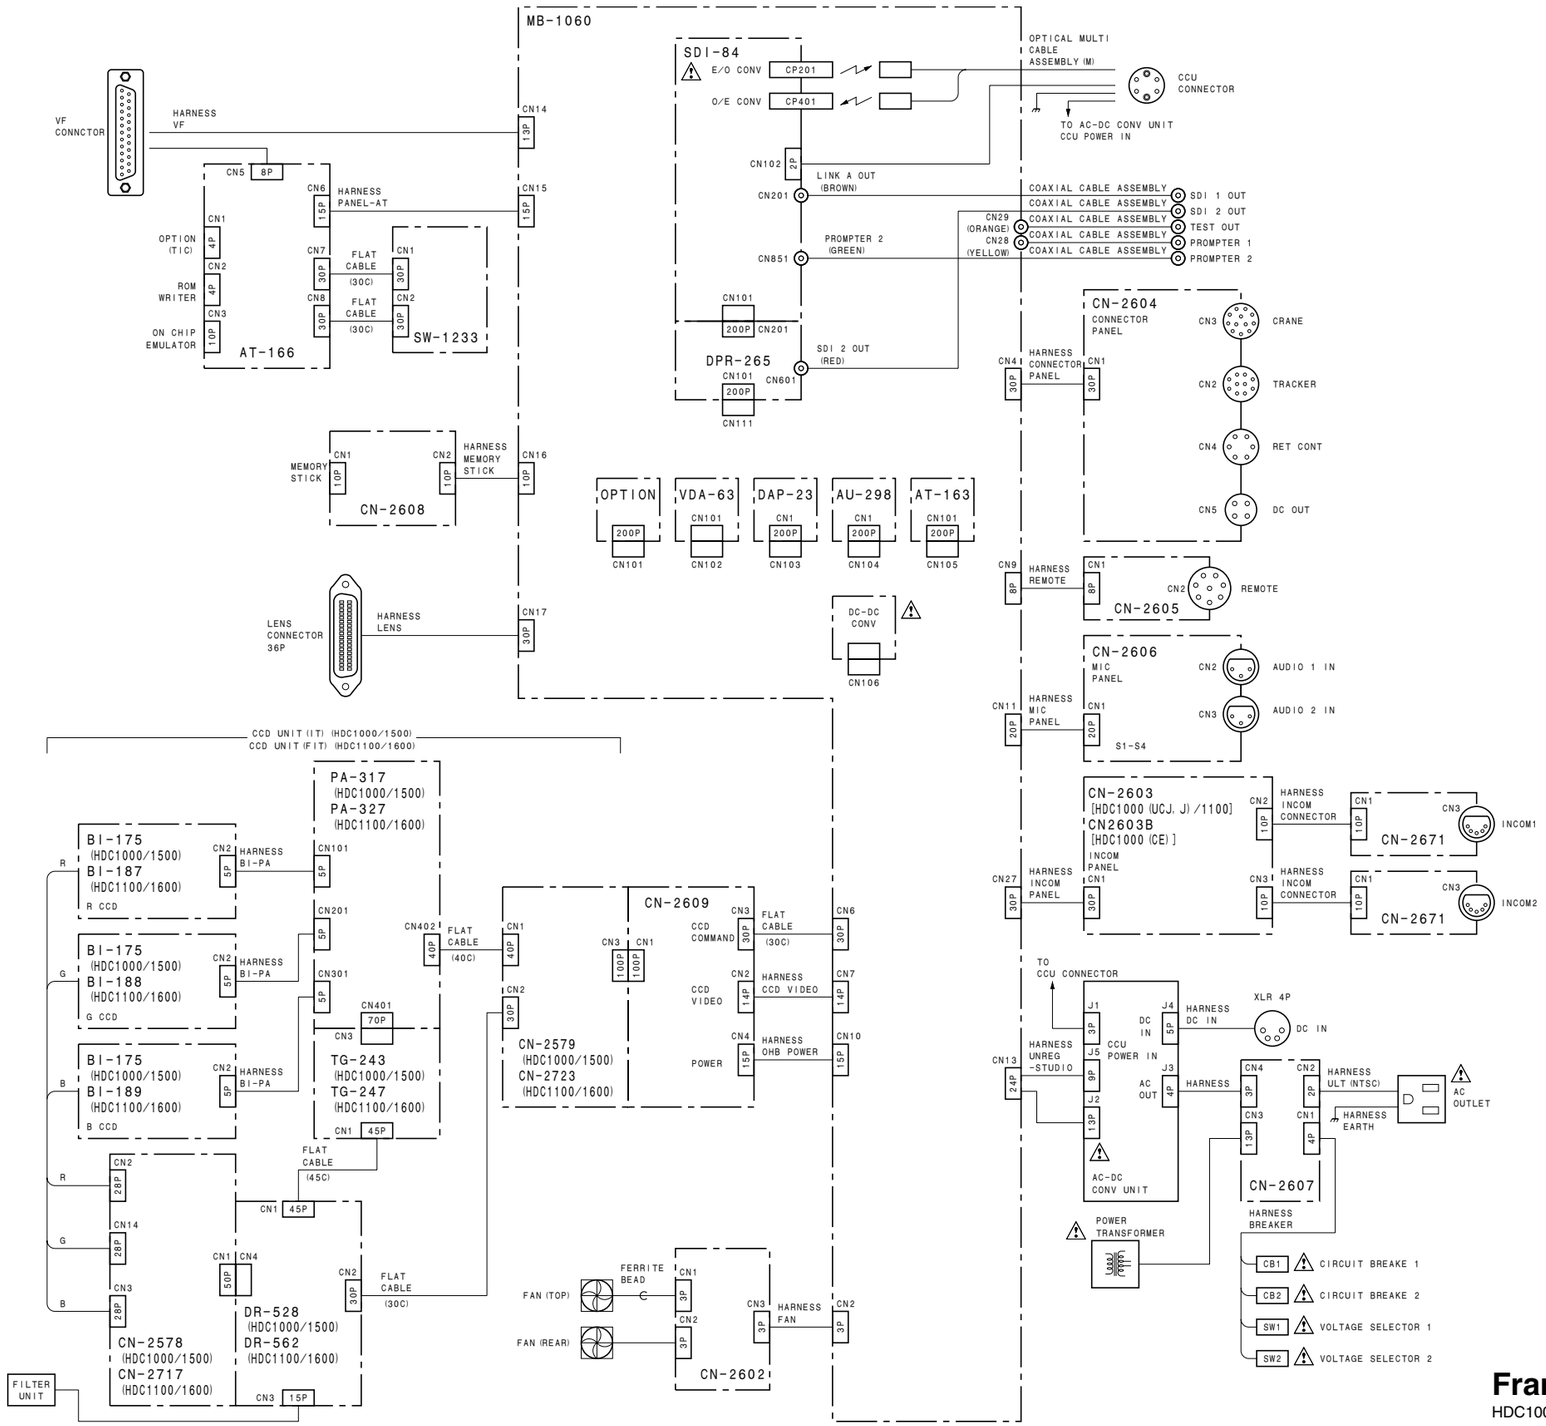


Frame Wiring
HDC1000/1100

Frame Wiring HDC1500/1550/1600

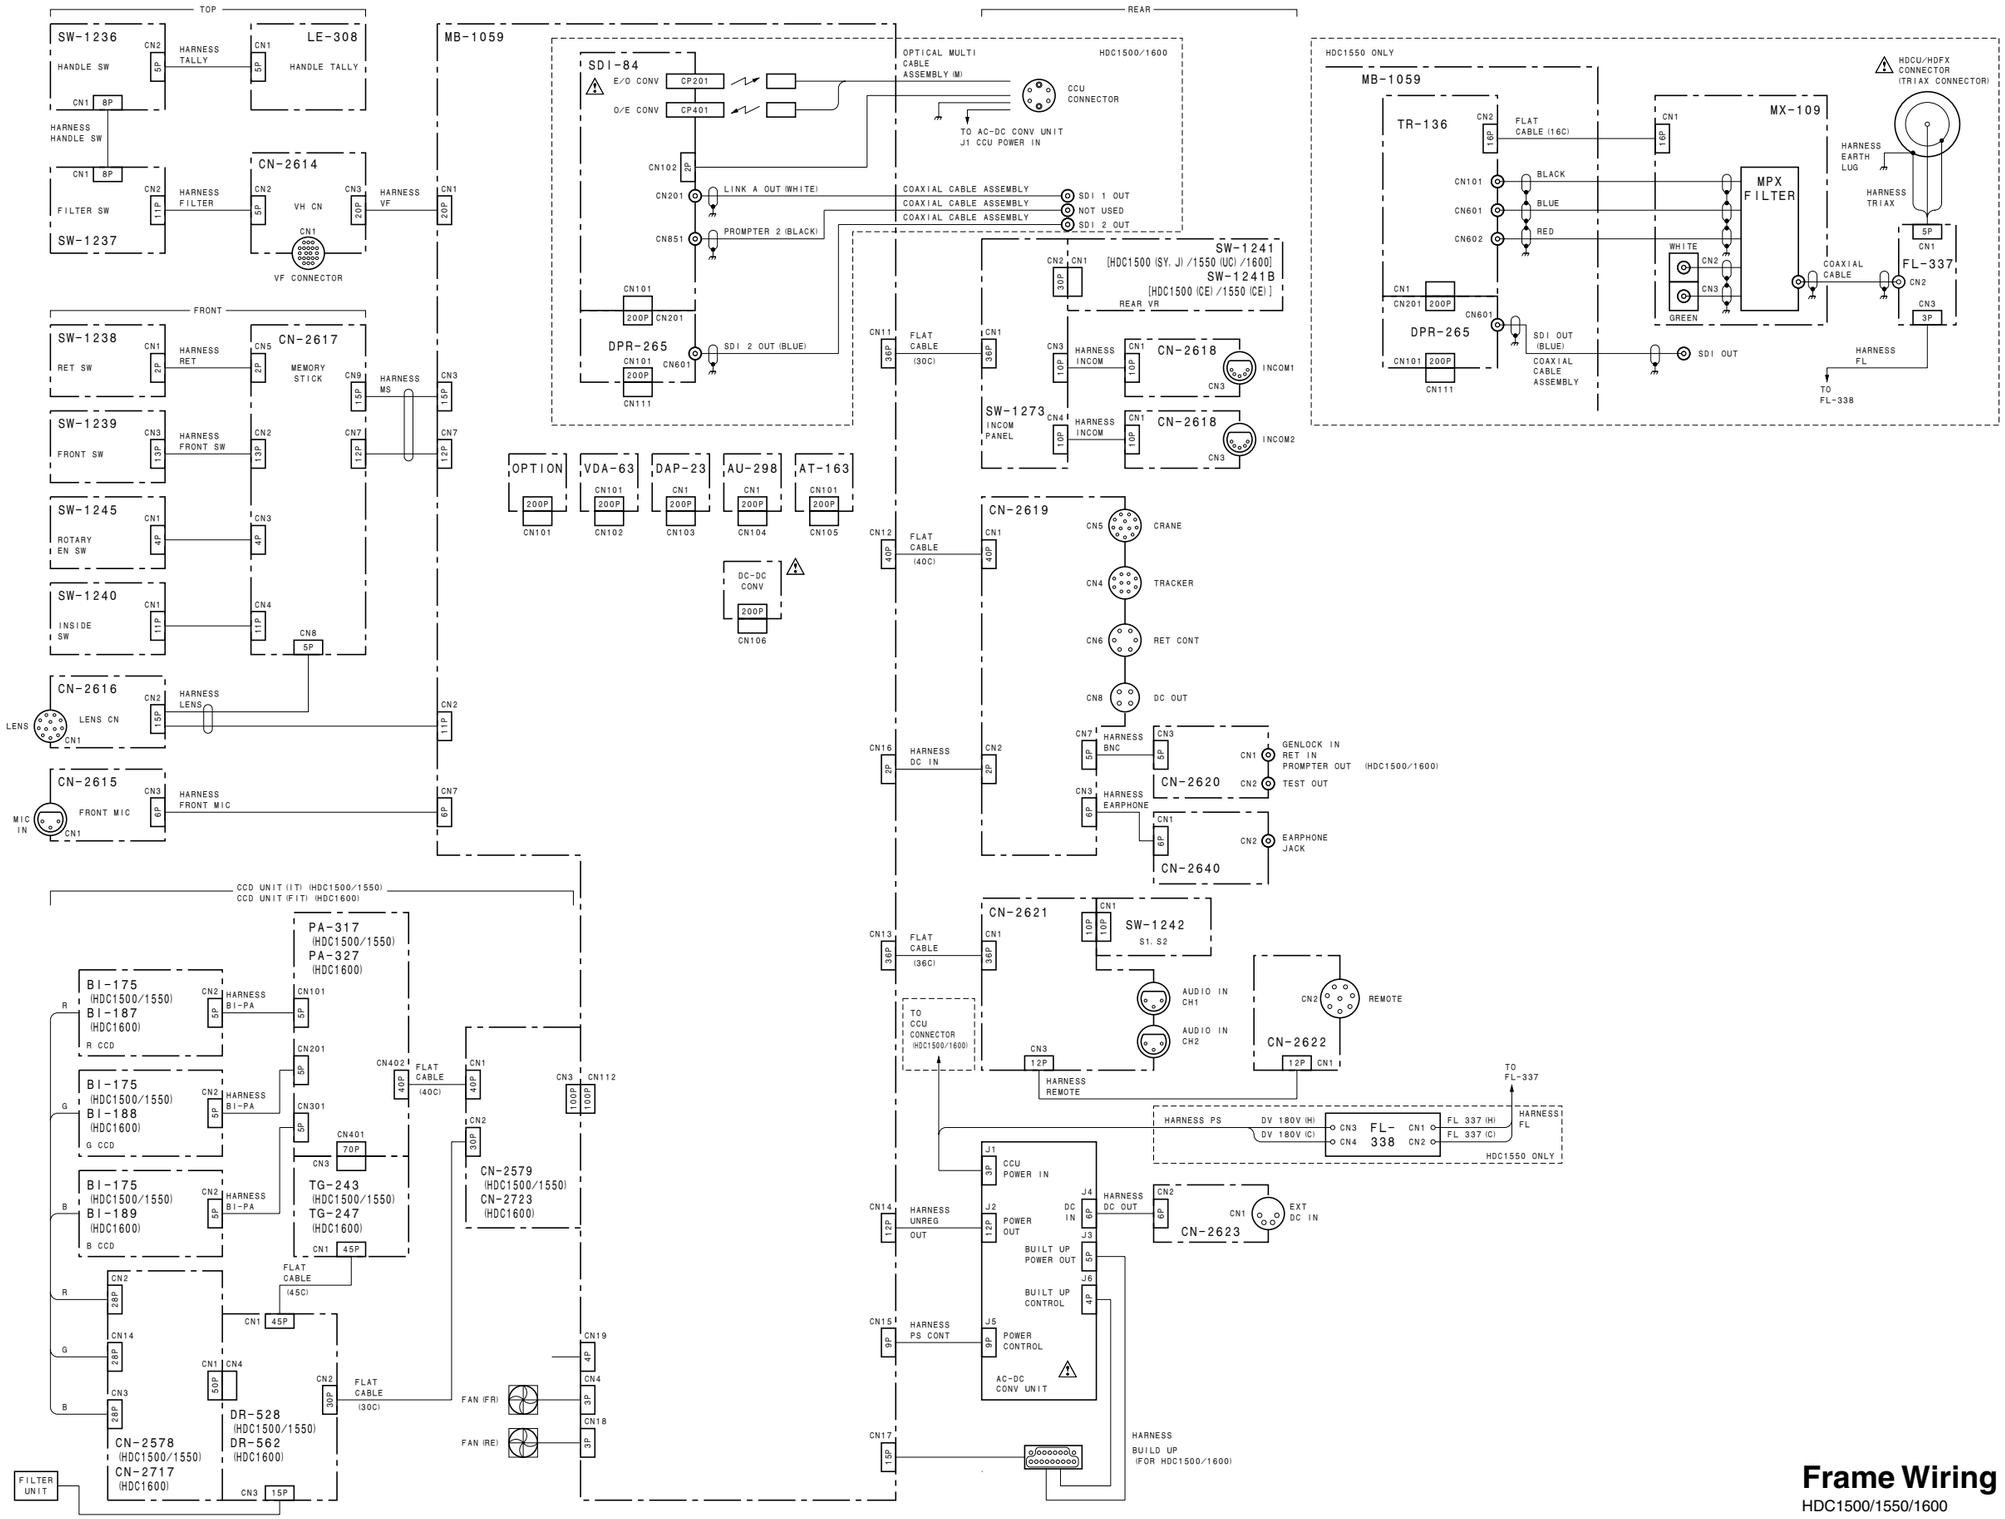

Frame Wiring
HDC1500/1550/1600

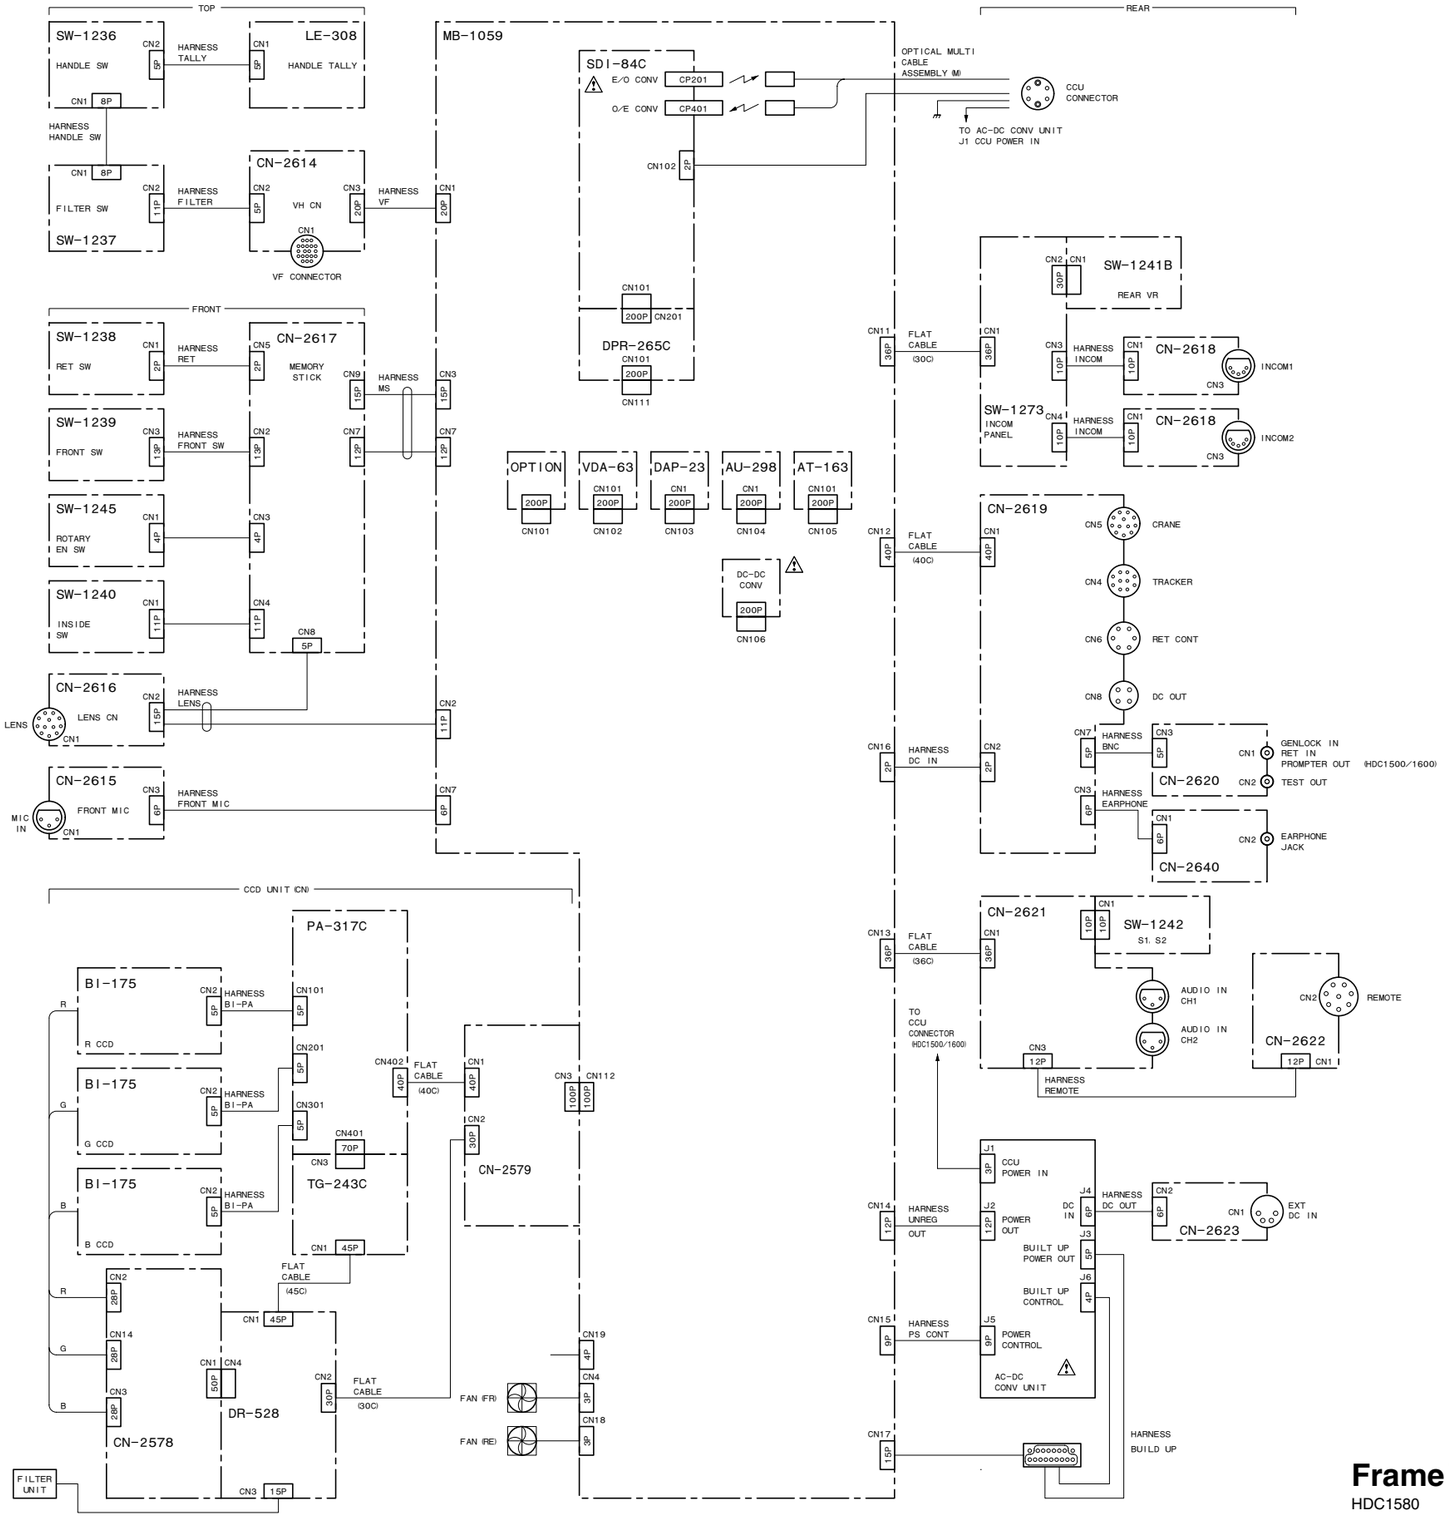

Frame Wiring
HDC1580


Section 5
Board Layouts

Index		Page
A.	AT-163	5-2
	AT-166	5-3
	AU-298	5-4
B.	BI-175	5-5
	BI-187	5-5
	BI-188	5-6
	BI-189	5-6
C.	CN-2578	5-7
	CN-2579	5-7
	CN-2602	5-7
	CN-2603	5-8
	CN-2604	5-9
	CN-2605	5-7
	CN-2606	5-9
	CN-2607	5-10
	CN-2608	5-10
	CN-2609	5-10
	CN-2614	5-11
	CN-2615	5-11
	CN-2616	5-11
	CN-2617	5-11
	CN-2618	5-11
	CN-2619	5-12
	CN-2620	5-12
	CN-2621	5-13
	CN-2622	5-14
	CN-2623	5-14
	CN-2640	5-14
	CN-2671	5-14
	CN-2712	5-14
	CN-2723	5-14
D.	DAP-33	5-15
	DPR-265	5-16
	DR-528	5-18
	DR-562	5-19
	DU-369	5-19
F.	FL-337	5-20
	FL-338	5-20
L.	LE-291	5-21
	LE-308	5-21
	LE-309	5-21


Index		Page
M.	MB-1059	5-23
	MB-1060	5-24
	MX-109	5-27
P.	PA-317	5-28
	PA-327	5-29
S.	SDI-84	5-30
	SW-1233	5-32
	SW-1236	5-34
	SW-1237	5-34
	SW-1238	5-34
	SW-1239	5-34
	SW-1240	5-34
	SW-1241	5-35
	SW-1242	5-34
	SW-1245	5-34
	SW-1273	5-36
T.	TG-243	5-38
	TG-247	5-39
	TR-136	5-40
V.	VDA-63	5-42

AT-163 (1-865-934-12)

C1	*B5	C161	*A3	C623	B4	IC114	*A4	IC140	B2	IC605	*C5	PH301	B3	R1	*C4	R30	*B1	R123	*C2	R149	*C4	R176	*C3	R202	*A1	R234	*B4	R314	*C2
C2	*C4	C162	*A3	C624	*B4	IC115	*B3	IC141	*A3	IC606	C2			R2	*C4	R31	*B1	R124	*C2	R150	*C4	R177	*C3	R203	*A1	R236	*C4	R315	B3
C3	*C5	C163	*A3	C625	B4	IC116	*A3	IC142	*A3	IC607	*B4	Q1	*C2	R3	*C4	R32	*B1	R125	*C2	R151	*C4	R178	*B4	R204	*A2	R237	*C4	R316	B4
C4	*C5	C164	B2	C626	B4	IC117	*B4	IC143	*B3	IC608	*B4	Q2	C5	R4	*C4	R33	*B1	R126	*C4	R152	C3	R179	*B4	R205	*A2	R238	*C4	R317	B4
C5	*B5	C165	*A3	C627	*B4	IC118	A3	IC144	*C4	IC609	B4	Q3	B5	R5	*C3	R101	C2	R127	*C4	R153	*C4	R180	B4	R206	B1	R239	C4	R318	*C3
C6	*B5	C166	*B3	C628	B4	IC119	B2	IC145	*B2	IC610	B4	Q101	*C1	R6	*C3	R102	*C2	R128	*C4	R154	*C4	R181	B4	R207	B1	R240	*B4	R319	B4
C7	C5	C167	B4	C629	*B4	IC120	C3	IC146	B1	IC611	C3	Q102	*C4	R7	*C2	R103	C2	R129	*C2	R155	A3	R182	*B4	R208	B1	R241	*B4	R320	*C4
C8	C1	C167	B4	C629	*B4	IC121	*B4	IC301	B3	IC612	*B1	Q103	*C4	R8	*C2	R104	*C1	R130	*C2	R156	*B4	R183	B4	R209	B2	R242	*C4	R321	*C3
C10	*C2	C168	*B4	C630	*B4	IC122	A3	IC302	B3			Q104	B2	R9	*C4	R105	*C1	R131	C2	R157	A3	R184	*B4	R210	B2	R243	*C4	R322	C4
C11	*C5	C169	B3	C631	*B4	IC123	C3	IC303	*C2	L1	*B5	Q105	C4	R10	*C2	R106	*C2	R132	C2	R158	*B2	R185	B4	R211	B2	R244	*C4	R323	C4
C12	*C2	C170	*B3	C632	*B4	IC124	*A2	IC304	*C2	L2	C1	Q401	C1	R11	*C5	R107	*C1	R133	*B2	R159	*B2	R186	*B4	R212	B2	R245	C3	R401	A2
C13	*C1	C171	B2	C633	*B4	IC125	*B2	IC305	*B3	L3	*C2	Q402	*C1	R12	*C1	R108	C2	R134	C3	R160	*B4	R187	B4	R213	B2	R254	C3	R402	*B1
C14	*C5	C172	A5	C634	B4	IC126	B3	IC306	C4	L4	C1	Q403	C2	R14	*C5	R109	C2	R135	*B4	R161	*B4	R188	*B4	R214	B2	R255	*C2	R403	*B1
C15	*C1	C173	B5	C635	*B4	IC127	*B2	IC307	*B3	L5	C5	Q404	C1	R16	*C1	R110	*C2	R136	*B4	R162	*B4	R189	B4	R215	*A4	R301	B3	R404	*A2
C16	*C1	C174	C3	C636	C5	IC128	*A2	IC308	*C4	L101	*A5	Q405	B1	R17	*B5	R111	*C2	R137	C3	R163	*B4	R190	B4	R216	*A4	R302	B3	R405	*B1
C17	*C1	C175	*B3	C637	B5	IC129	B2	IC401	*A2	L102	*A4	Q406	*C1	R18	*B5	R112	*C4	R138	*C4	R164	*B4	R191	*B4	R217	*B4	R303	B2	R406	A2
C18	*B5	C176	*B1	C638	C4	IC130	B4	IC402	*A2	L103	*A3	Q407	C1	R19	*C5	R113	*C4	R139	*C4	R165	*B4	R192	*B4	R218	*B3	R304	*B3	R407	A2
C19	*B5	C301	B3	C639	C2	IC131	*B3	IC403	A2	L104	C4	Q408	B1	R20	*C5	R114	*C4	R140	*C4	R167	C3	R193	B4	R219	*B3	R305	B3	R408	*A2
C20	*C5	C302	*B2	C640	C2	IC132	B2	IC404	A1	L105	A3	Q409	B1	R22	*B5	R115	*C4	R141	*C4	R168	C3	R194	B4	R220	*B3	R306	B3	R409	C1
C21	*C5	C303	B2	C641	B4	IC133	*A4	IC406	*B3	L301	C4	Q410	B1	R23	*C5	R116	*C4	R142	*C4	R169	*C4	R195	B4	R221	*B3	R307	B3	R410	A1
C22	*C5	C304	B3	C642	B5	IC134	B2	IC407	*B3	L401	B2	Q411	B1	R24	*C5	R117	*C4	R143	*C4	R170	*C4	R196	*A3	R225	*B3	R308	*C2	R411	*A1
C23	*C5	C305	B2	C643	*B5	IC135	*C3	IC408	B1	L402	*B1	Q412	C1	R25	*C5	R118	*B1	R144	*C4	R171	*B5	R197	*A3	R226	*B3	R309	*C2	R412	A2
C24	*C1	C306	B3	C644	*B4	IC136	C3	IC601	*B2	L403	B1	Q413	C1	R26	*B5	R119	*C2	R145	*C4	R172	*C4	R198	*B2	R227	*C3	R310	*C2	R413	A2
C25	C1	C307	B3	C645	*C5	IC137	*A1	IC602	*C4	L601	B3	Q414	C1	R27	*C5	R120	*C4	R146	*B3	R173	*C4	R199	*B2	R228	C4	R311	*C4	R414	A1
C26	*C1	C308	B2	C646	*B2	IC138	B2	IC603	*B5	L602	*B5	Q415	C1	R28	*C1	R121	*C4	R147	*B3	R174	*B1	R200	*A2	R231	*B4	R312	*C2	R415	*A1
C27	*C1	C309	*B3	C647	*C5	IC139	*A4	IC604	B5	L603	*B1	Q416	C1	R29	*B1	R122	*C4	R148	B3	R175	*C4	R201	*A2	R232	C4	R313	B3	R416	C1
C28	C1	C310	B3																										
C29	C5	C311	*B3	CL1	B5																								
C30	*B1	C312	*B3	CL2	C5																								
C31	C5	C313	C4	CL3	C5																								
C32	C5	C314	C4	CL4	B1																								
C33	C5	C315	*C2	CL101	A5																								
C34	B1	C316	*C2																										
C35	B5	C317	B3	CN101	C3																								
C36	C5	C318	*C4	CN102	A5																								
C102	*C2	C319	B4	CN401	A2																								
C103	B1	C320	B4																										
C104	*C2	C321	*C3	D1	*C2																								
C105	*C2	C401	*A2	D2	*C5																								
C106	*B2	C402	*A2	D3	*C5																								
C107	*C2	C403	*A2	D102	C2																								
C108	*B3	C404	*A2	D103	C2																								
C109	*B3	C406	A2	D104	*B4																								
C110	*B4	C407	*B3	D105	*C2																								
C111	B2	C408	*B2	D401	*B3																								
C112	*C4	C409	B2	D402	*B3																								
C113	*B4	C410	*A2	D403	*B3																								
C114	*C4	C411	A2	D404	*B3																								
C115	*C3	C412	C2	D601	B4																								
C116	B3	C413	C2	D602	B4																								
C117	*C1	C414	*A2	D603	B4																								
C119	*A5	C415	*B1	D604	B4																								
C120	A4	C416	*B2	D605	B5																								
C121	*B2	C417	*B1	D606	B5																								
C122	A3	C418	*B1	D607	*B5																								
C123	*C3	C419	*B1	D608	*B5																								
C124	*B2	C420	*B1																										
C125	*C4	C421	*B1	E1	B4																								
C126	*C4	C422	*A1																										
C127	*A3	C423	*A1	FB1	C1																								
C128	A4	C425	*A1	FB2	C1																								
C129	A5	C426	*A1	FB101	C2																								
C130	A5	C427	B1	FB102	C2																								
C131	B4	C428	*A1	FB103	C2																								
C132	*C3	C429	*A1	FB104	C2																								
C133	*B4	C430	*A1	FB105	C2																								
C134	B4	C431	*A1	FB106	C2																								
C135	*B4	C432	*A1	FB301	C4																								
C136	A4	C433	*A1	FB302	C4																								
C137	A3	C434	*A1	FB401	*C3																								
C138	B4	C435	B1	FB402	*C3																								
C139	B4	C601	*B1	FB403	*C3																								
C140	*A3	C602	*B1	FB404	*C3																								
C141	*B4	C603	B3	FB405	*C3																								
C142	*B4	C604	B3	FB406	*C3																								
C143	*B4	C605	C3	FB407	*C3																								
C144	*B4	C606	C2																										
C145	B3	C607	C3	IC1	*C1																								
C146	B3	C608	*C2	IC2	*B5																								
C147	B3	C609	*C2	IC3	*C5																								
C148	B2	C610	*C2	IC101	*C2																								
C149	*A2	C611	*C2	IC102	*C2																								
C150	*A1	C612	*C2	IC103	*C2																								
C151	*B2	C613	*B4	IC104	*C2																								
C152	*A2	C614	*C4	IC105	*C1																								
C153	*A2	C615	*C2	IC106	*B3																								
C154	*B2	C616	*B5	IC107	*B3																								
C155	*A2	C617	*C4	IC108	*B2																								
C156	*A5	C618	B4	IC109	A4																								
C157	*A4	C619	B4	IC110	*B2																								
C158	B2	C620	*B4	IC111	*C3																								
C159	*A4	C621	*B4	IC112	*C3																								
C160	B2	C622	*B4	IC113	B4																								

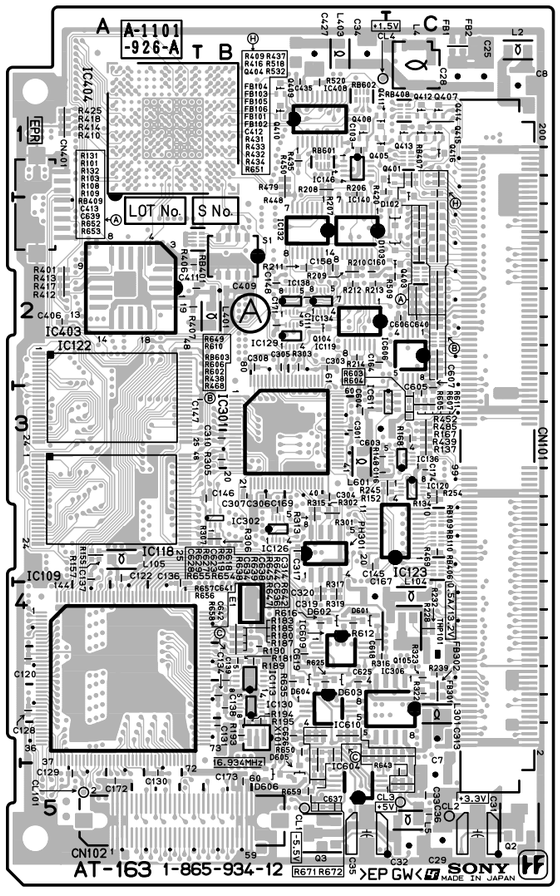

AT-163 -A SIDE-
SUFFIX: -12

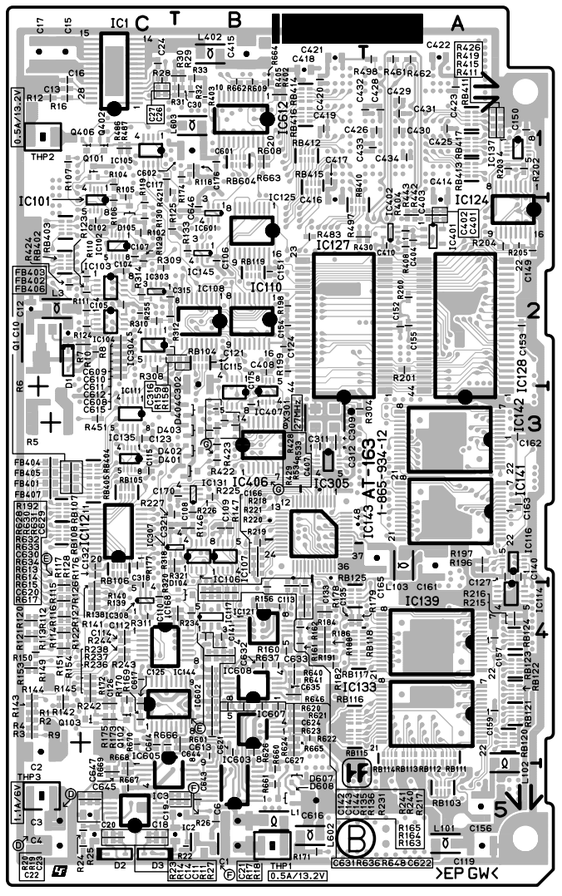


AT-163 -B SIDE-
SUFFIX: -12


R417	A2	R649	C2	RB103	*A5																		
R418	A1	R650	B4	RB104	*B2																		
R419	*A1	R651	C2	RB105	*C3																		
R420	B1	R652	C2	RB106	*C3																		
R421	*C1	R653	C2	RB107	*C3																		
R422	*B3	R654	B4	RB108	*C3																		
R423	*B3	R655	B4	RB109	C3																		
R424	*C2	R656	B5	RB110	C3																		
R425	A1	R657	B4	RB111	*A4																		
R426	*A1	R658	B5	RB112	*A4																		
R428	*B3	R659	B5	RB113	*A4																		
R429	*B3	R660	*B5	RB114	*A4																		
R430	*A2	R661	*B5	RB115	*B4																		
R431	C2	R662	*B1	RB116	*B4																		
R432	C2	R663	*B1	RB117	*B4																		
R433	C2	R664	*B1	RB118	*B4																		
R434	C2	R665	*B4	RB119	*B2																		
R435	B1	R666	*C4	RB120	*A4																		
R437	C1	R667	*C5	RB121	*A4																		
R438	C2	R668	*C5	RB122	*A4																		
R439	C3	R669	*C5	RB123	*A4																		
R442	*A2	R670	*C4	RB124	*A4																		
R443	*A2	R671	B5	RB125	*B4																		
R448	B1	R672	B5	RB401	B2																		
R450	B1			RB402	*C2																		
R451	*C3	RB103	*A5	RB403	*C2																		
R452	C3	RB104	*B2	RB404	*C3																		
R461	*A1	RB105	*C3	RB405	*C3																		
R462	*A1	RB106	*C3	RB601	B1																		
R468	C2	RB107	*C3	RB602	B1																		
R469	C3	RB108	*C3	RB603	C2																		
R479	B1	RB109	C3	RB604	*B1																		
R483	*B2	RB110	C3																				
R485	C3	RB111	*A4																				
R486	*C1	RB112	*A4																				
R487	*C1	RB113	*A4																				
R497	*B2	RB114	*A4																				
R498	*A1	RB115	*B4																				
R509	C2	RB116	*B4																				
R518	C1	RB117	*B4																				
R520	B1	RB118	*B4																				
R532	C1	RB119	*B2																				
R533	*B3	RB120	*A4																				
R534	*B3	RB121	*A4																				
R601	*B4	RB122	*A4																				
R602	C2	RB123	*A4																				
R603	C3	RB124	*A4																				
R604	C3	RB125	*B4																				
R605	C3	RB401	B2																				
R606	C2	RB402	*C2																				
R607	C3	RB403	*C2																				
R608	*B1	RB404	*C3																				
R609	*B1	RB405	*C3																				
R610	C2	RB406	C3																				
R611	C3	RB407	C1																				
R612	B4	RB408	C1																				
R613	*B4	RB409	C2																				
R614	*B4	RB410	*B2																				
R615	*B4	RB411	*A1																				
R616	B4	RB412	*B1																				
R617	*B4	RB413	*A1																				
R618	B4	RB414	*B1																				
R619	B4	RB415	*B1																				
R620	*B4	RB416	*B1																				
R621	*B4	RB417	*A1																				
R622	*B4	RB601	B1																				
R623	*B4	RB602	B1																				
R624	*B4	RB603	C2																				
R625	B4	RB604	*B1																				
R626	*B4																						
R627	B4	S1	B2																				
R628	*B4																						
R629	B4	THP1	*B5																				
R630	*B4	THP2	*C1																				
R631	*B4	THP3	*C5																				
R632	*B4	THP101	C4																				
R633	*B4																						
R634	*B4	X101	B4																				
R635	B4	X301	*B3																				
R636	*B4																						
R637	*B4	*:B SIDE																					
R638	B4																						
R639	B4																						
R640	*B4																						
R641	*B4																						
R642	C5																						
R643	C5																						
R644	C4																						
R645	C4																						
R646	*B4																						
R647	C5																						
R648	*B4																						

AT-166 (1-867-406-11)

C3	*C1	D8	C1
C4	*C1	D9	C1
C5	C1	D10	C2
C8	C1	D11	C2
C9	C1	D12	*A1
C10	*C1	D13	*A1
C12	*C1	D14	*B1
C13	*C1	D15	*B1
C14	*C1	D16	*B1
C15	*C1		
C16	C1	E1	*C2
C18	*B1		
C19	B1	FB1	*C1
C21	*B1	FB2	*C1
C22	*B1	FB5	*C2
C23	B1	FB6	*C2
C24	*B1	FB7	C1
C25	C2	FB8	C1
C31	*B2		
C33	*B2	FL6	C2
C37	C1	FL7	C2
C38	*C2	FL8	C2
C39	*C1	FL10	C2
C43	*A2	FL11	C2
C44	*A2	FL12	C2
C45	*B1	FL13	C2
C46	*B2	FL14	C2
C47	*A1		
C48	*A2	IC1	*C1
C49	*A1	IC4	*C1
C50	*A1	IC6	*B2
C51	*A2	IC7	*B2
C52	*A1	IC8	*C1
C53	*A1	IC10	*C2
C54	*B1	IC12	*B2
C55	*A1	IC13	*C2
C56	*A2	IC16	C1
C57	*B1	IC18	*A2
C58	*B1	IC20	*B2
C60	*B2	IC21	A1
C61	*B2	IC22	A2
C62	*B2	IC23	A1
C63	B2	IC24	A2
C64	*B2	IC25	*C2
C65	B2		
C66	*B2	L1	C1
C67	A2	L2	C1
C68	A1	L4	*A2
C69	A2	L5	C1
C70	A1		
C71	*C2	Q1	C1
C72	C1	Q2	C1
C73	*C2	Q4	*B2
CL1	*C1	R6	*C1
CL2	*B1	R10	C1
CL3	*B1	R11	C1
CL4	*C1	R15	C2
		R16	C2
CN1	*C2	R17	*C1
CN2	*A2	R18	*C1
CN3	*B2	R19	*C1
CN5	*C2	R21	C1
CN6	*C1	R22	C1
CN7	*A1	R26	C2
CN8	*A2	R27	C2
		R28	C2
D1	C1	R29	C2
D3	*C2	R30	C2
D4	*C2	R31	C2

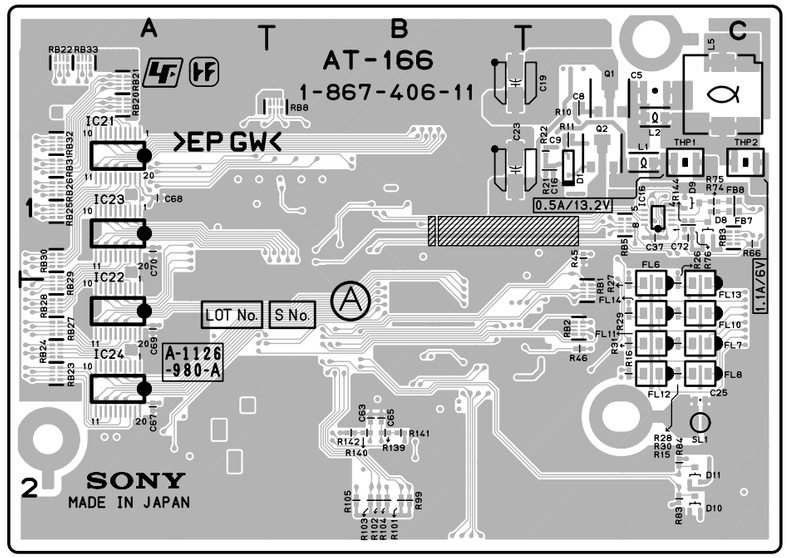

AT-166 -A SIDE-
SUFFIX: -11

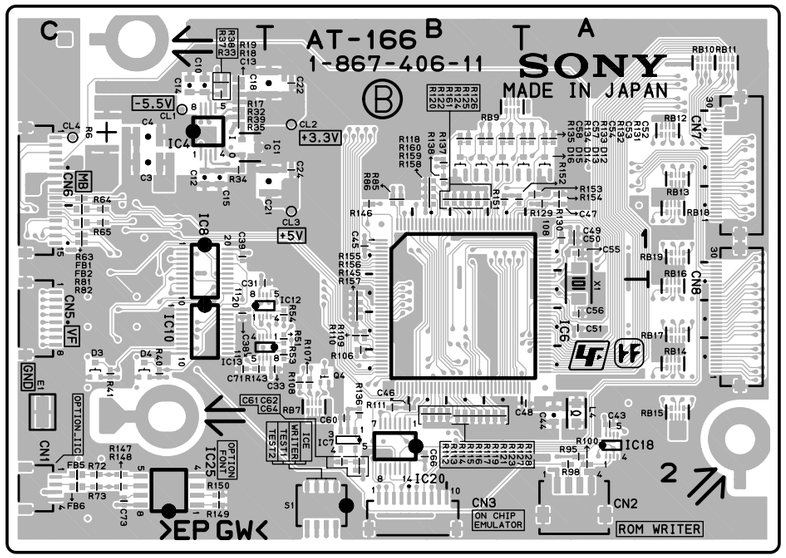


AT-166 -B SIDE-
SUFFIX: -11


R32	*C1	R138	*B1
R33	*C1	R139	B2
R34	*C1	R140	B2
R35	*C1	R141	B2
R37	*C1	R142	B2
R38	*C1	R143	*C2
R39	*C1	R144	C1
R40	*C2	R145	*B2
R41	*C2	R146	*B1
R45	C1	R147	*C2
R46	C2	R148	*C2
R51	*B2	R149	*C2
R53	*B2	R150	*C2
R54	*B2	R151	*B1
R63	*C1	R152	*B1
R64	*C1	R153	*A1
R65	*C1	R154	*A1
R66	C1	R155	*B2
R72	*C2	R156	*B2
R73	*C2	R157	*B2
R74	C1	R158	*B1
R75	C1	R159	*B1
R76	C1	R160	*B1
R81	*C1	R161	*B1
R82	*C1		
R83	C2	RB1	C2
R84	C2	RB2	C2
R85	*B1	RB3	C1
R86	*B1	RB5	C1
R95	*A2	RB7	*B2
R98	*A2	RB8	B1
R99	B2	RB9	*B1
R100	*A2	RB10	*A1
R101	B2	RB11	*A1
R102	B2	RB12	*A1
R103	B2	RB13	*A1
R104	B2	RB14	*A2
R105	B2	RB15	*A2
R106	*B2	RB16	*A2
R107	*B2	RB17	*A2
R108	*B2	RB18	*A1
R109	*B2	RB19	*A1
R110	*B2	RB20	A1
R111	*B2	RB21	A1
R112	*B2	RB22	A1
R113	*B2	RB23	A2
R114	*B2	RB24	A2
R115	*B2	RB25	A1
R116	*B2	RB26	A1
R117	*B2	RB27	A2
R118	*B1	RB28	A2
R119	*B2	RB29	A2
R120	*B1	RB30	A1
R121	*B2	RB31	A1
R122	*B1	RB32	A1
R123	*B2	RB33	A1
R124	*B1		
R125	*B1	S1	*B2
R126	*B1		
R127	*B2	SL1	C2
R128	*B2		
R129	*A1	THP1	C1
R130	*A1	THP2	C1
R131	*A1		
R132	*A1	X1	*A2
R133	*B1		
R134	*B1	*:B SIDE	
R135	*B1		
R136	*B2		
R137	*B1		

AT-163 (1-865-934-13)

C1	*B5	C161	*A3	C620	*B4
C2	*C4	C162	*A3	C621	*B4
C3	*C5	C163	*A3	C622	*B4
C4	*C5	C164	B2	C623	B4
C6	*B5	C165	*A3	C624	*B4
C7	C5	C166	*B3	C625	B4
C8	C1	C167	B4	C626	B4
C10	*C2	C168	*B4	C627	*B4
C11	*C5	C169	B3	C628	B4
C12	*C2	C170	*B3	C629	*B4
C13	*C1	C171	B2	C630	*B4
C14	*C5	C172	A5	C631	*B4
C15	*C1	C173	B5	C632	*B4
C16	*C1	C174	C3	C633	*B4
C17	*C1	C175	*B3	C634	B4
C18	*B5	C176	*B1	C635	*B4
C19	*B5	C177	*C2	C636	C5
C20	*C5	C301	B3	C637	B5
C21	*C5	C302	*B2	C638	C4
C22	*C5	C303	B2	C639	C2
C23	*C5	C304	B3	C640	C2
C24	*C1	C305	B2	C641	B4
C25	C1	C306	B3	C642	B5
C26	*C1	C307	B3	C643	*B5
C27	*C1	C308	B2	C644	*B4
C28	C1	C309	*B3	C645	*C5
C29	C5	C310	B3	C646	*B2
C30	*B1	C311	*B3	C647	*C5
C31	C5	C312	*B3		
C32	C5	C313	C4	CL1	B5
C33	C5	C314	C4	CL2	C5
C34	B1	C315	*C2	CL3	C5
C35	B5	C316	*C2	CL4	B1
C36	C5	C317	B3	CL101	A5
C102	*C2	C318	*C4		
C103	B1	C319	B4	CN101	C3
C104	*C2	C320	B4	CN102	A5
C105	*C2	C321	*C3	CN401	A2
C106	*B2	C401	*A2		
C107	*C2	C402	*A2	D1	*C2
C108	*B3	C403	*A2	D2	*C5
C109	*B3	C404	*A2	D3	*C5
C110	*B4	C406	A2	D102	C2
C111	B2	C407	*B3	D103	C2
C112	*C4	C408	*B2	D104	*B4
C113	*B4	C409	B2	D105	*C2
C114	*C4	C410	*A2	D401	*B3
C115	*C3	C411	A2	D402	*B3
C116	B3	C412	C2	D403	*B3
C117	*C1	C413	C2	D404	*B3
C119	*A5	C414	*A2	D601	B4
C120	A4	C415	*B1	D602	B4
C121	*B2	C416	*B2	D603	B4
C122	A3	C417	*B1	D604	B4
C123	*C3	C418	*B1	D605	B5
C124	*B2	C419	*B1	D606	B5
C125	*C4	C420	*B1	D607	*B5
C126	*C4	C421	*B1	D608	*B5
C127	*A3	C422	*A1		
C128	A4	C423	*A1	E1	B4
C129	A5	C425	*A1		
C130	A5	C426	*A1	FB1	C1
C131	B4	C427	B1	FB2	C1
C132	*C3	C428	*A1	FB101	C2
C133	*B4	C429	*A1	FB102	C2
C134	B4	C430	*A1	FB103	C2
C135	*B4	C431	*A1	FB104	C2
C136	A4	C432	*A1	FB105	C2
C137	A3	C433	*A1	FB106	C2
C138	B4	C434	*A1	FB301	C4
C139	B4	C435	B1	FB302	C4
C140	*A3	C436	*C1	FB401	*C3
C141	*B4	C437	C1	FB402	*C3
C142	*B4	C601	*B1	FB403	*C3
C143	*B4	C602	*B1	FB404	*C3
C144	*B4	C603	B3	FB405	*C3
C145	B3	C604	B3	FB406	*C3
C146	B3	C605	C3	FB407	*C3
C147	B3	C606	C2		
C148	B2	C607	C3	HB001	*A5
C149	*A2	C608	*C2		
C150	*A1	C609	*C2	IC1	*C1
C151	*B2	C610	*C2	IC2	*B5
C152	*A2	C611	*C2	IC3	*C5
C153	*A2	C612	*C2	IC101	*C2
C154	*B2	C613	*B4	IC103	*C2
C155	*A2	C614	*C4	IC104	*C2
C156	*A5	C615	*C2	IC105	*C1
C157	*A4	C616	*B5	IC106	*B3
C158	B2	C617	*C4	IC107	*B3
C159	*A4	C618	B4	IC108	*B2
C160	B2	C619	B4	IC109	A4

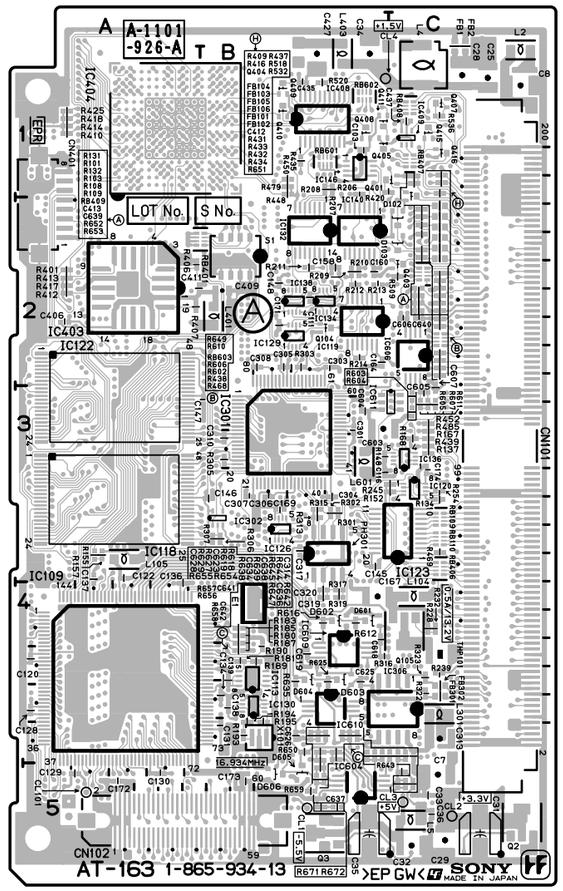

AT-163 -A SIDE-
SUFFIX: -13

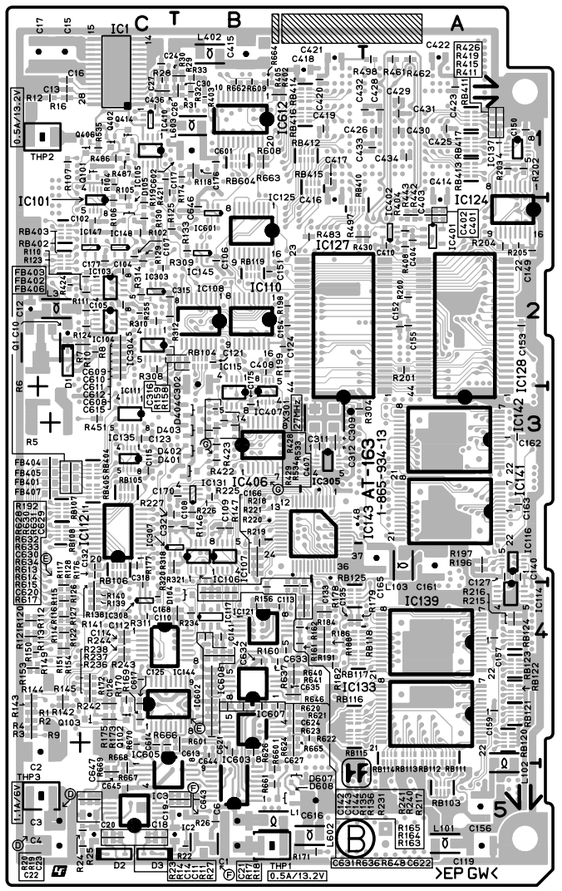


AT-163 -B SIDE-
SUFFIX: -13

IC110	*B2	IC136	C3	IC407	*B3	L105	A3	Q408	B1	R22	*B5	R115	*C4	R141	*C4	R168	C3	R194	B4	R220	*B3	R306	B3
IC111	*C3	IC137	*A1	IC408	B1	L301	C4	Q409	B1	R23	*C5	R116	*C4	R142	*C4	R169	*C4	R195	B4	R221	*B3	R307	B3
IC112	*C3	IC138	B2	IC409	C1	L401	B2	Q410	B1	R24	*C5	R117	*C4	R143	*C4	R170	*C4	R196	*A3	R225	*B3	R308	*C2
IC113	B4	IC139	*A4	IC410	*C1	L402	*B1	Q411	B1	R25	*C5	R118	*B1	R144	*C4	R171	*B5	R197	*A3	R226	*B3	R309	*C2
IC114	*A4	IC140	B2	IC601	*B2	L403	B1	Q414	*C1	R26	*B5	R119	*C2	R145	*C4	R172	*C4	R198	*B2	R227	*C3	R310	*C2
IC115	*B3	IC141	*A3	IC602	*C4	L601	B3	Q415	C1	R27	*C5	R120	*C4	R146	*B3	R173	*C4	R199	*B2	R228	C4	R311	*C4
IC116	*A3	IC142	*A3	IC603	*B5	L602	*B5	Q416	C1	R28	*C1	R121	*C4	R147	*B3	R174	*B1	R200	*A2	R231	*B4	R312	*C2
IC117	*B4	IC143	*B3	IC604	B5	L603	*B1			R29	*B1	R122	*C4	R148	B3	R175	*C4	R201	*A2	R232	C4	R313	B3
IC118	A3	IC144	*C4	IC605	*C5			R1	*C4	R30	*B1	R123	*C2	R149	*C4	R176	*C3	R202	*A1	R234	*B4	R314	*C2
IC119	B2	IC145	*B2	IC606	C2	PH301	B3	R2	*C4	R31	*B1	R124	*C2	R150	*C4	R177	*C3	R203	*A1	R236	*C4	R315	B3
IC120	C3	IC146	B1	IC607	*B4			R3	*C4	R32	*B1	R125	*C2	R151	*C4	R178	*B4	R204	*A2	R237	*C4	R316	B4
IC121	*B4	IC147	*C2	IC608	*B4	Q1	*C2	R4	*C4	R33	*B1	R126	*C4	R152	C3	R179	*B4	R205	*A2	R238	*C4	R317	B4
IC122	A3	IC148	*C2	IC609	B4	Q2	C5	R5	*C3	R101	C2	R127	*C4	R153	*C4	R180	B4	R206	B1	R239	C4	R318	*C3
IC123	C3	IC301	B3	IC610	B4	Q3	B5	R6	*C3	R102	*C2	R128	*C4	R154	*C4	R181	B4	R207	B1	R240	*B4	R319	B4
IC124	*A2	IC302	B3	IC611	C3	Q101	*C1	R7	*C2	R103	C2	R129	*C2	R155	A3	R182	*B4	R208	B1	R241	*B4	R320	*C4
IC125	*B2	IC303	*C2	IC612	*B1	Q102	*C4	R8	*C2	R104	*C1	R130	*C2	R156	*B4	R183	B4	R209	B2	R242	*C4	R321	*C3
IC126	B3	IC304	*C2			Q103	*C4	R9	*C4	R105	*C1	R131	C2	R157	A3	R184	*B4	R210	B2	R243	*C4	R322	C4
IC127	*B2	IC305	*B3	L1	*B5	Q104	B2	R10	*C2	R106	*C2	R132	C2	R158	*B2	R185	B4	R211	B2	R244	*C4	R323	C4
IC128	*A2	IC306	C4	L2	C1	Q105	C4	R11	*C5	R107	*C1	R133	*B2	R159	*B2	R186	*B4	R212	B2	R245	C3	R401	A2
IC129	B2	IC307	*B3	L3	*C2	Q401	C1	R12	*C1	R108	C2	R134	C3	R160	*B4	R187	B4	R213	B2	R254	C3	R402	*B1
IC130	B4	IC308	*C4	L4	C1	Q402	*C1	R14	*C5	R109	C2	R135	*B4	R161	*B4	R188	*B4	R214	B2	R255	*C2	R403	*B1
IC131	*B3	IC401	*A2	L5	C5	Q403	C2	R16	*C1	R110	*C2	R136	*B4	R162	*B4	R189	B4	R215	*A4	R301	B3	R404	*A2
IC132	B2	IC402	*A2	L101	*A5	Q404	C1	R17	*B5	R111	*C2	R137	C3	R163	*B4	R190	B4	R216	*A4	R302	B3	R405	*B1
IC133	*A4	IC403	A2	L102	*A4	Q405	B1	R18	*B5	R112	*C4	R138	*C4	R164	*B4	R191	*B4	R217	*B4	R303	B2	R406	A2
IC134	B2	IC404	A1	L103	*A3	Q406	*C1	R19	*C5	R113	*C4	R139	*C4	R165	*B4	R192	*B4	R218	*B3	R304	*B3	R407	A2
IC135	*C3	IC406	*B3	L104	C4	Q407	C1	R20	*C5	R114	*C4	R140	*C4	R167	C3	R193	B4	R219	*B3	R305	B3	R408	*A2


R409	C1	R639	B4		
R410	A1	R640	*B4		
R411	*A1	R641	*B4		
R412	A2	R642	C5		
R413	A2	R643	C5		
R414	A1	R644	C4		
R415	*A1	R645	C4		
R416	C1	R646	*B4		
R417	A2	R647	C5		
R418	A1	R648	*B4		
R419	*A1	R649	C2		
R420	C1	R650	B4		
R421	*C1	R651	C2		
R422	*B3	R652	C2		
R423	*B3	R653	C2		
R424	*C2	R654	B4		
R425	A1	R655	B4		
R426	*A1	R656	B5		
R428	*B3	R657	B4		
R429	*B3	R658	B5		
R430	*A2	R659	B5		
R431	C2	R660	*B5		
R432	C2	R661	*B5		
R433	C2	R662	*B1		
R434	C2	R663	*B1		
R435	B1	R664	*B1		
R437	C1	R665	*B4		
R438	C2	R666	*C4		
R439	C3	R667	*C5		
R442	*A2	R668	*C5		
R443	*A2	R669	*C5		
R448	B1	R670	*C4		
R450	B1	R671	B5		
R451	*C3	R672	B5		
R452	C3				
R461	*A1	RB103	*A5		
R462	*A1	RB104	*B2		
R468	C2	RB105	*C3		
R469	C3	RB106	*C3		
R479	B1	RB107	*C3		
R483	*B2	RB108	*C3		
R485	C3	RB109	C3		
R486	*C1	RB110	C3		
R487	*C1	RB111	*A4		
R497	*B2	RB112	*A4		
R498	*A1	RB113	*A4		
R509	C2	RB114	*A4		
R518	C1	RB115	*B4		
R520	B1	RB116	*B4		
R532	C1	RB117	*B4		
R533	*B3	RB118	*B4		
R534	*B3	RB119	*B2		
R535	*C1	RB120	*A4		
R536	C1	RB121	*A4		
R601	*B4	RB122	*A4		
R602	C2	RB123	*A4		
R603	C3	RB124	*A4		
R604	C3	RB125	*B4		
R605	C3	RB401	B2		
R606	C2	RB402	*C2		
R607	C3	RB403	*C2		
R608	*B1	RB404	*C3		
R609	*B1	RB405	*C3		
R610	C2	RB406	C3		
R611	C3	RB407	C1		
R612	B4	RB408	C1		
R613	*B4	RB409	C2		
R614	*B4	RB410	*B2		
R615	*B4	RB411	*A1		
R616	B4	RB412	*B1		
R617	*B4	RB413	*A1		
R618	B4	RB414	*B1		
R619	B4	RB415	*B1		
R620	*B4	RB416	*B1		
R621	*B4	RB417	*A1		
R622	*B4	RB601	B1		
R623	*B4	RB602	B1		
R624	*B4	RB603	C2		
R625	B4	RB604	*B1		
R626	*B4				
R627	B4	S1	B2		
R628	*B4				
R629	B4	THP1	*B5		
R630	*B4	THP2	*C1		
R631	*B4	THP3	*C5		
R632	*B4	THP101	C4		
R633	*B4				
R634	*B4	X101	B4		
R635	B4	X301	*B3		
R636	*B4				
R637	*B4	*:B SIDE			
R638	B4				

AT-166 (1-867-406-21)

C3	*C1	D8	C1
C4	*C1	D9	C1
C5	C1	D10	C2
C8	C1	D11	C2
C9	C1	D12	*A1
C10	*C1	D13	*A1
C12	*C1	D14	*B1
C13	*C1	D15	*B1
C14	*C1	D16	*B1
C15	*C1		
C16	C1	E1	*C2
C18	*B1		
C19	B1	FB1	*C1
C21	*B1	FB2	*C1
C22	*B1	FB5	*C2
C23	B1	FB6	*C2
C24	*B1	FB7	C1
C25	C2	FB8	C1
C31	*C2		
C33	*B2	FL6	C2
C37	C1	FL7	C2
C38	*C2	FL8	C2
C39	*C1	FL10	C2
C43	*A2	FL11	C2
C44	*A2	FL12	C2
C45	*B1	FL13	C2
C46	*B2	FL14	C2
C47	*A1		
C48	*A2	IC1	*C1
C49	*A1	IC4	*C1
C50	*A1	IC6	*B2
C51	*A2	IC7	*B2
C52	*A1	IC8	*C1
C53	*A1	IC10	*C2
C54	*B1	IC12	*B2
C55	*A1	IC13	*C2
C56	*A2	IC16	C1
C57	*B1	IC18	*A2
C58	*B1	IC20	*B2
C60	*B2	IC21	A1
C61	*B2	IC22	A2
C62	*B2	IC23	A1
C63	B2	IC24	A2
C64	*B2	IC25	*C2
C65	B2		
C66	*B2	L1	C1
C67	A2	L2	C1
C68	A1	L4	*A2
C69	A2	L5	C1
C70	A1		
C71	*C2	Q1	C1
C72	C1	Q2	C1
C73	*C2	Q4	*B2
CL1	*C1	R6	*C1
CL2	*B1	R10	C1
CL3	*B1	R11	C1
CL4	*C1	R15	C2
		R16	C2
CN1	*C2	R17	*C1
CN2	*A2	R18	*C1
CN3	*B2	R19	*C1
CN5	*C2	R21	C1
CN6	*C1	R22	C1
CN7	*A1	R26	C2
CN8	*A2	R27	C2
		R28	C2
D1	C1	R29	C2
D3	*C2	R30	C2
D4	*C2	R31	C2

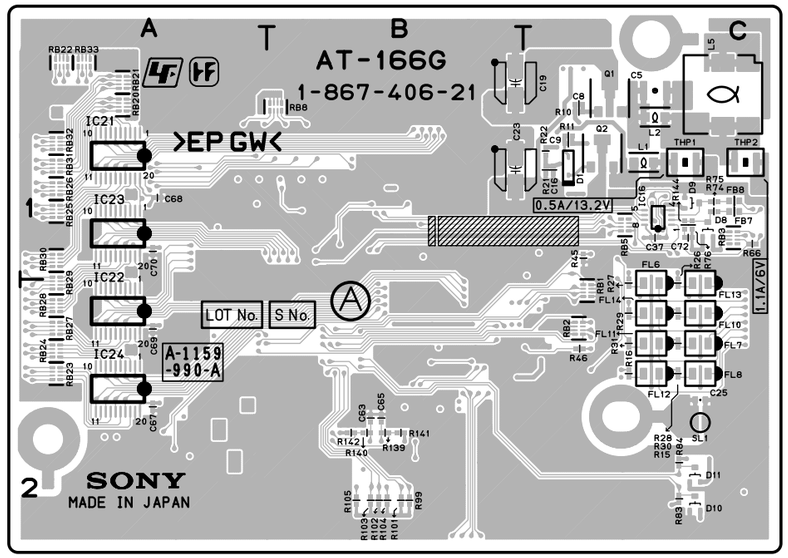

AT-166 -A SIDE-
SUFFIX: -21

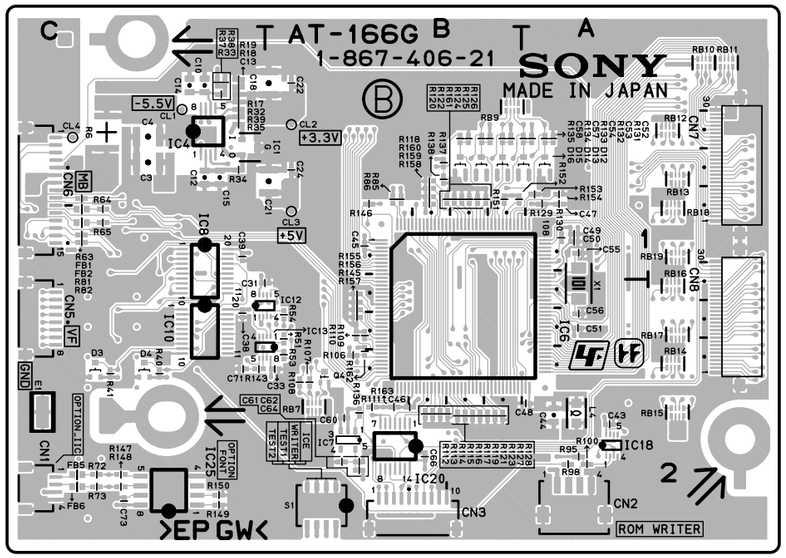


AT-166 -B SIDE-
SUFFIX: -21


R32	*C1	R138	*B1
R33	*C1	R139	B2
R34	*C1	R140	B2
R35	*C1	R141	B2
R37	*C1	R142	B2
R38	*C1	R143	*C2
R39	*C1	R144	C1
R40	*C2	R145	*B2
R41	*C2	R146	*B1
R45	C1	R147	*C2
R46	C2	R148	*C2
R51	*B2	R149	*C2
R53	*B2	R150	*C2
R54	*B2	R151	*B1
R63	*C1	R152	*B1
R64	*C1	R153	*A1
R65	*C1	R154	*A1
R66	C1	R155	*B2
R72	*C2	R156	*B2
R73	*C2	R157	*B2
R74	C1	R158	*B1
R75	C1	R159	*B1
R76	C1	R160	*B1
R81	*C1	R161	*B1
R82	*C1	R162	*B2
R83	C2	R163	*B2
R84	C2		
R85	*B1	RB1	C2
R86	*B1	RB2	C2
R95	*A2	RB3	C1
R98	*A2	RB5	C1
R99	B2	RB7	*B2
R100	*A2	RB8	B1
R101	B2	RB9	*B1
R102	B2	RB10	*A1
R103	B2	RB11	*A1
R104	B2	RB12	*A1
R105	B2	RB13	*A1
R106	*B2	RB14	*A2
R107	*B2	RB15	*A2
R108	*B2	RB16	*A2
R109	*B2	RB17	*A2
R110	*B2	RB18	*A1
R111	*B2	RB19	*A1
R112	*B2	RB20	A1
R113	*B2	RB21	A1
R114	*B2	RB22	A1
R115	*B2	RB23	A2
R116	*B2	RB24	A2
R117	*B2	RB25	A1
R118	*B1	RB26	A1
R119	*B2	RB27	A2
R120	*B1	RB28	A2
R121	*B2	RB29	A2
R122	*B1	RB30	A1
R123	*B2	RB31	A1
R124	*B1	RB32	A1
R125	*B1	RB33	A1
R126	*B1		
R127	*B2	S1	*B2
R128	*B2		
R129	*A1	SL1	C2
R130	*A1		
R131	*A1	THP1	C1
R132	*A1	THP2	C1
R133	*B1		
R134	*B1	X1	*A2
R135	*B1		
R136	*B2	*:B SIDE	
R137	*B1		

AU-298 (1-865-933-12)

C1	A3	C254	B3	C438	C2																		
C2	A3	C255	*B3	C439	D1																		
C3	B3	C256	C2	C440	D1																		
C4	B3	C257	B2	C441	D1																		
C5	*A3	C258	*C3	C442	C1																		
C6	*A3	C259	*C3	C443	*D2																		
C7	A3	C301	B3	C444	*C2																		
C8	A3	C302	A3	C445	D1																		
C9	*A2	C303	A3	C446	C1																		
C10	B2	C304	A2	C447	*D1																		
C11	B2	C305	B3	C448	*D1																		
C12	*A2	C306	*A2	C449	*D2																		
C13	*B2	C307	*A2	C450	*D2																		
C14	*B2	C308	*B2																				
C15	*B2	C309	A2	CL1	B2																		
C16	*A2	C310	*B2	CL2	B2																		
C17	*A2	C311	*A2	CL3	B2																		
C18	*A2	C312	*A3	CL4	B2																		
C19	*B2	C313	A2	CL6	A2																		
C20	*B2	C314	A2	CL7	A2																		
C21	*A2	C315	*A2	CL8	B2																		
C22	B2	C316	*A3	CL9	B2																		
C23	B2	C317	B2																				
C24	A2	C318	*A1	CN1	C3																		
C25	A2	C319	*A1																				
C26	*C3	C320	A2	D1	*A3																		
C28	*B2	C321	A3	D2	*A3																		
C29	*B2	C322	*B2	D3	B2																		
C30	A1	C323	A2	D4	B2																		
C31	*B2	C324	A3	D5	*A3																		
C32	A1	C325	A1	D6	*A3																		
C33	*B2	C326	A1	D7	B2																		
C34	*B2	C327	A1	D8	B2																		
C35	B1	C328	A1	D9	B2																		
C36	B2	C329	*A1	D10	B2																		
C37	*B1	C330	*A1	D11	*B1																		
C38	*C1	C331	A2	D12	*B1																		
C39	*C1	C332	*A1	D201	*C2																		
C40	B1	C333	*A1	D202	*C2																		
C41	C1	C334	A2	D203	*C2																		
C42	C1	C335	A2	D204	*C2																		
C45	*B2	C336	A2	D205	*B1																		
C46	A1	C337	A2	D206	*B1																		
C201	B2	C338	A1	D207	*C2																		
C202	*B1	C340	A2	D301	*B2																		
C203	C3	C342	*A1	D302	*B2																		
C204	C3	C343	A3	D303	*A2																		
C205	*B1	C344	A3	D304	*A2																		
C206	*B2	C345	A3	D401	D1																		
C207	C2	C346	A3	D402	C1																		
C208	C2	C347	*A1	D403	*D2																		
C209	C3	C349	*A2	D404	*D2																		
C210	C3	C350	*A3	D405	*D2																		
C211	*C2	C351	*A3	D406	*C2																		
C212	*C2	C352	*A3	D407	*D1																		
C213	*B2	C401	*D1	D408	D1																		
C214	*C2	C402	*D1	D409	D1																		
C215	C2	C403	*D3	D410	C1																		
C216	*C2	C404	*D3	D411	C1																		
C217	*B2	C405	*D3	D412	*D2																		
C218	*C2	C406	*C3	D413	*C2																		
C219	C2	C407	*D3	D414	*D2																		
C220	C2	C408	*D3	D415	*C2																		
C221	C2	C409	*C3	D416	*D2																		
C222	*C2	C410	*C3	D417	*D2																		
C223	B2	C411	D2	D418	*D2																		
C224	B2	C412	D2	D419	*D2	IC203	C1	JC7	*B1	JC203	*B2	Q201	*C3	Q308	B2	Q417	*D3	Q443	*C2	R22	*A2	R48	C1	R74	*B1	R201	B2	R227	*C2
C225	C2	C413	D2	D420	*D2	IC204	B1	JC8	*B1	JC301	*A2	Q202	*C3	Q309	*B2	Q418	*D3	Q444	D1	R23	*A2	R49	C1	R75	*B1	R202	B2	R228	*C2
C227	C3	C414	C2	D421	*D2	IC205	*B2	JC9	*B1	JC302	A2	Q203	*C3	Q310	*B2	Q419	*C3	Q445	D1	R24	B2	R50	C1	R76	*B1	R203	*C3	R229	*C2
C228	B3	C415	D3	D422	*D2	IC206	B2	JC10	*B1	JC303	*A1	Q204	*C3	Q311	*A2	Q420	*C1	Q446	C1	R25	B2	R51	C1	R77	*B1	R204	*C3	R230	*C2
C229	C2	C416	D3	D423	*D2	IC207	*C2	JC11	*B1			Q205	*C3	Q312	*A2	Q421	*C1	Q447	C1	R26	*A2	R52	C1	R78	A1	R205	*C3	R231	*C2
C230	B2	C417	D3	D424	*C2	IC208	*C2	JC12	*B1	L1	*B3	Q206	C2	Q313	B2	Q422	C1	Q448	C2	R27	*A2	R53	C1	R79	B1	R206	*C3	R232	*C2
C231	C3	C418	C3	D425	*C2	IC209	*B2	JC13	*B1	L2	*B3	Q207	*C2	Q314	*A2	Q423	C1			R28	A1	R54	B1	R80	B1	R207	B2	R233	*C2
C232	B3	C419	D3	D426	*D2	IC301	B2	JC14	*B1	L3	A3	Q208	C2	Q315	*B2	Q424	D2	R1	*B3	R29	B1	R55	B1	R81	B1	R208	*C3	R234	*C2
C233	C3	C420	D3	D427	*D2	IC302	*A1	JC15	*B1	L4	A3	Q209	*C2	Q316	*A2	Q425	C2	R4	B2	R30	*B2	R56	C1	R82	B1	R209	*C3	R235	*C2
C234	*C3	C421	C3			IC303	B1	JC16	*B1	L5	A3	Q210	*C2	Q317	*A2	Q426	D2	R5	B2	R31	*B2	R57	C1	R83	B1	R210	*C3	R236	*C2
C235	C3	C422	C3	E1	C1	IC304	*A2	JC17	*B1	L6	*B2	Q211	*C2	Q401	*C1	Q427	D2	R6	B2	R32	*B2	R58	B1	R84	*B1	R211	*C3	R237	*C2
C236	*C3	C423	*D3			IC305	*A1	JC18	*C1	L7	*B1	Q212	*C2	Q402	D1	Q428	*D2	R7	B2	R33	B2	R59	*B1	R85	*B1	R212	C3	R238	C2
C237	C1	C424	*C3	IC3	B2	IC306	*A3	JC19	*C1	L8	*B1	Q213	C2	Q403	*D1	Q429	*D2	R8	B2	R34	B1	R60	*B1	R86	*B1	R213	C3	R239	C2
C238	B1	C425	*D2	IC4	B2	IC307	*A1	JC20	*C1	L9	*C1	Q214	*C2	Q404	*D1	Q430	*D2	R9	B2	R35	B1	R61	*B1	R87	*B1	R214	*B2	R240	C2
C239	C1	C426	*D2	IC5	*A2	IC308	*A2	JC21	*C1	L10	*C3	Q215	*C2	Q405	*D2	Q431	*D2	R10	B2	R36	*B2	R62	*B1	R88	B1	R215	C3	R241	*C2
C240	C1	C427	*D2	IC11	B1	IC401	D2	JC22	*C1	L201	B1	Q216	*C2	Q406	*D2	Q432	*D2	R11	B2	R37	*B2	R63	B1	R89	B2	R216	C3	R242	C2
C241	*C1	C428	*D2	IC12	B1	IC402	*D1	JC23	*C1	L202	C1	Q217	*C2	Q407	*C2	Q433	*C2	R12	B2	R38	B1	R64	*B1	R90	B2	R217	C2	R243	C2
C242	*C1	C429	*D2	IC13	C1	IC411	C2	JC24	*C1			Q218	*C1	Q408	*C2	Q434	*C2	R13	B2	R39	B2	R65	*B2	R91	*B2	R218	C2	R244	C2
C243	B1	C430	*C2	IC15	B1	IC412	*C1	JC25	*C1	Q1	B2	Q219	*C1	Q409	D1	Q435	*C2	R14	B2	R40	B1	R66	B1	R92	*B1	R219	C2	R245	*C2
C246	B1	C431	*D2	IC16	B2			JC26	*C1	Q2	B2	Q301	*A3	Q410	D1	Q436	*D2	R15	B2	R41	B2	R67	B1	R93	*B2	R220	*B2	R246	*C2
C247	*B1	C432	*C2	IC18	*A1	JC1	*B1	JC27	*C1	Q3	A2	Q302	*B3	Q411	*D2	Q437	*D2	R16	B2	R42	B1	R68	B1	R94	*B2	R221	C2	R247	*C2
C248	*C1	C433	*D2	IC19	B1	JC2	*B1	JC28	*C1	Q4	A2	Q303	*B3	Q412	*D2	Q438	D2	R17	B2	R43	B2	R69	*B1	R95	*B1	R222	C2	R248	*C2
C249	*B1	C434	*C2	IC20	*B1	JC3	*B1	JC29	*C1	Q5	*B3	Q304	*B3	Q413	*C2	Q439	C2	R18	*A3	R44	*B1	R70	B1	R96	*B2	R223	*C2	R249	B2
C250	*C1	C435	D1	IC21	*B2	JC4	*B1	JC30	*B1	Q6	*B3	Q305	*A3	Q414	*C2	Q440	*D2	R19	*A3	R45	B1	R71	B1	R97	*B2	R224	*C2	R250	C2
C252	B3	C436	D1	IC201	C2	JC5	*B1	JC201	*B2	Q7	*B2	Q306	A2	Q415	C1	Q441	*C2	R20	*A2	R46	B1	R72	B1	R98	*B1	R225	*C2	R251	B2
C253	*B3	C437	D2	IC202	*C1	JC6	*B1	JC202	*B2	Q8	*B2	Q307	*A2	Q416	*D3	Q442	*D2	R21	*A2	R47	B1	R73	B1	R99	*B2	R226	*C2	R252	B2

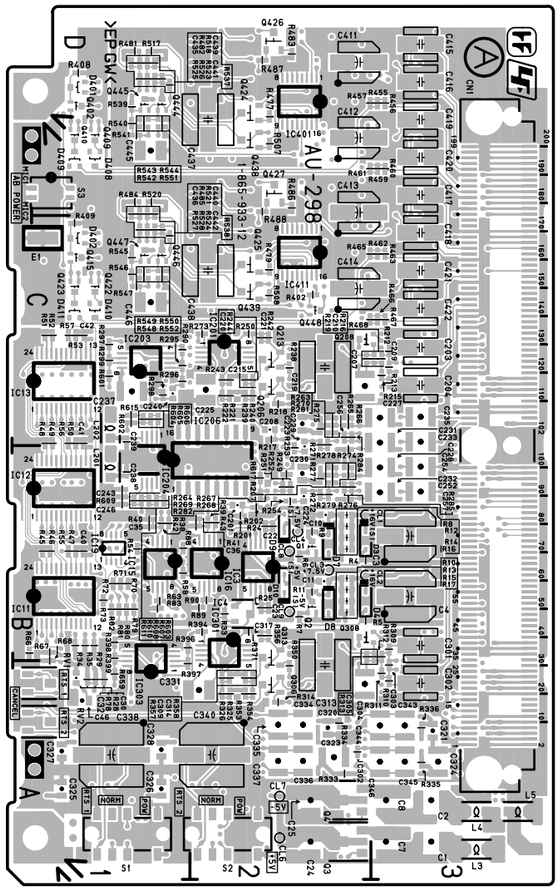

AU-298 -A SIDE-
SUFFIX: -12

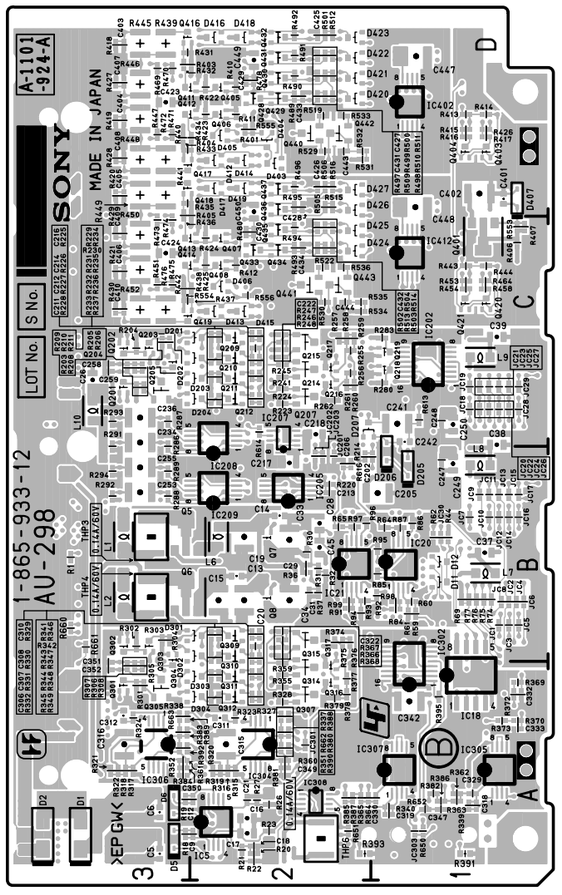


AU-298 -B SIDE-
SUFFIX: -12

R253	B2	R346	*B2	R439	*D3	R531	*D2																
R254	B2	R347	*B2	R440	*D3	R532	*D2																
R255	*C2	R348	*A2	R441	*D3	R533	*D2																
R256	*C2	R349	*A2	R442	*C3	R534	*C2																
R257	*C2	R350	A2	R443	*C1	R535	*C2																
R258	*C2	R351	*A2	R444	*C1	R536	*C2																
R259	*C2	R352	*A3	R445	*D3	R537	D1																
R260	*C2	R353	A2	R446	*D3	R538	C1																
R261	*C2	R354	A2	R447	*D3	R539	D1																
R262	*C2	R355	*A2	R448	*D3	R540	D1																
R263	C2	R356	B2	R449	*D3	R541	D1																
R264	B2	R357	A2	R450	*C3	R542	D1																
R265	C2	R358	A2	R451	*C3	R543	D1																
R266	C2	R359	*A2	R452	*C3	R544	D1																
R267	B2	R360	*A2	R453	*C1	R545	C1																
R268	B2	R361	*A3	R454	*C1	R546	C1																
R269	B2	R362	*A1	R455	D3	R547	C1																
R270	C2	R363	*A1	R456	D3	R548	C1																
R271	C2	R364	*A2	R457	D2	R549	C1																
R272	B2	R365	*A2	R458	*C1	R550	C1																
R273	C2	R366	*B2	R459	D3	R551	D1																
R274	B2	R367	*B2	R460	D3	R552	C1																
R275	C2	R368	*B2	R461	D2	R553	*C1																
R276	B2	R369	*A1	R462	C3	R554	*C3																
R277	B2	R370	*A1	R463	C3	R555	*D2																
R278	C2	R371	B2	R464	*C1	R556	*C2																
R279	B2	R372	*A1	R465	C2	R601	C1																
R280	*C1	R373	*A1	R466	C3	R602	C1																
R281	C2	R374	*B2	R467	C3	R603	B1																
R282	B2	R375	*B2	R468	C2	R604	C1																
R283	*C1	R376	*B2	R469	*D3	R605	C1																
R284	C2	R377	*A2	R470	*D3	R606	C1																
R285	B2	R378	*A2	R471	*D3	R607	B1																
R286	*B3	R379	*A2	R472	*D3	R608	B1																
R287	*C3	R380	*A2	R473	*C3	R609	B1																
R288	*B3	R381	*A2	R474	*C3	R610	B1																
R289	*B3	R382	*A1	R475	*C3	R611	B1																
R290	C1	R383	*A3	R476	*C3	R613	*C1																
R291	*B3	R384	*A3	R477	D2	R614	*C2																
R292	*B3	R385	*A2	R478	*D2	R615	C1																
R293	*C3	R386	*A1	R479	C2	R616	*B2																
R294	*B3	R387	*A2	R480	*C2	R617	B2																
R295	C1	R388	*A2	R481	D1	R650	*A1																
R296	C1	R389	*A3	R482	D1	R651	*A2																
R297	C1	R390	*A2	R483	D2	R652	*A1																
R298	C1	R391	*A1	R484	D1	R659	A1																
R299	C1	R392	*A3	R485	D1	R660	*B3																
R301	*A3	R393	*A2	R486	D2	R661	*B3																
R302	*B3	R394	B2	R487	D2	R662	*A2																
R303	*B3	R395	*A1	R488	D2	R663	*A3																
R304	*B3	R396	B1	R489	*D2																		
R305	*A3	R397	A1	R490	*D2	RV1	A1																
R306	*A3	R398	B1	R491	*D2	RV2	A1																
R307	*A3	R399	B1	R492	*D2																		
R308	*A3	R401	*D2	R493	*C2	S1	A1																
R309	B3	R402	C2	R494	*C2	S2	A2																
R310	A3	R403	*D2	R495	*D2	S3	D1																
R311	A3	R404	*D3	R496	*D2																		
R312	B3	R405	*D2	R497	*D2	THP3	*B3																
R313	B2	R406	*C1	R498	*D2	THP4	*B3																
R314	A2	R407	*C1	R499	*D2	THP6	*A2																
R315	*A2	R408	D1	R500	*D2																		
R316	*A2	R409	C1	R501	*D2	*:B SIDE																	
R317	*A3	R410	*D2	R502	*C2																		
R318	*A3	R411	*D2	R503	*C2																		
R319	*A2	R412	*C2	R504	*C2																		
R320	*A2	R413	*D1	R505	*D2																		
R321	*A3	R414	*D1	R506	*D2																		
R322	*A3	R415	*D1	R507	D2																		
R323	*A2	R416	*D1	R508	C2																		
R324	*A3	R417	*D1	R509	*D2																		
R325	A2	R418	*D3	R510	*D2																		
R326	A2	R419	*D3	R511	*D2																		
R327	*A2	R420	*D3	R512	*D2																		
R328	*A2	R421	*C3	R513	*C2																		
R329	*B2	R422	*D2	R514	*C2																		
R330	*B2	R423	*D2	R515	*D2																		
R331	*A2	R424	*C2	R516	*D2																		
R332	*A2	R425	*C2	R517	D1																		
R333	A2	R426	*D1	R518	D1																		
R334	A2	R427	*D3	R519	*D2																		
R335	A3	R428	*D3	R520	D1																		
R336	A3	R429	*C3	R521	D1																		
R337	*A2	R430	*C3	R522	*C2																		
R338	*A3	R431	*D3	R523	D1																		
R339	*A1	R432	*D3	R524	C1																		
R340	*A1	R433	*D3	R525	D1																		
R341	*B2	R434	*D2	R526	D1																		
R342	*B2	R435	*D3	R527	C1																		
R343	*B2	R436	*D3	R528	C1																		
R344	*A2	R437	*C3	R529	*D2																		
R345	*A2	R438	*C2	R530	*C2																		


BI-175, BI-187

BI-175 (1-868-173-11)

C1	A1	C34	B2	LV1	A2	R24	A1
C2	A2	C35	B2	LV2	A2	R25	*A1
C3	A1	C36	B2			R26	*A1
C4	B2	C37	B2	Q1	*A1	R27	B2
C5	B2	C38	B2			R28	B2
C6	A2	C39	B2	R1	B2	R29	B2
C7	*B1	C40	B2	R2	B2	R30	*B2
C8	A2	C41	B2	R3	A2	R31	*B2
C9	*B1	C42	B2	R4	A2	R32	*B2
C10	A2	C43	B2	R5	B1	R33	*B2
C11	B2	C44	B2	R6	B2	R34	B2
C12	A2			R7	A2	R37	B2
C13	A1	CN1	*A2	R8	B2	R40	B2
C14	A2	CN2	B2	R9	A2	R41	B2
C16	*B2			R10	A2	R42	B2
C17	*B2	D1	B1	R11	A2	R43	B2
C18	*B2	D2	A2	R12	A2	R44	B2
C19	*B2	D3	B2	R13	A2	R45	B2
C20	B2	D4	A1	R14	A2	R46	B2
C22	B2	D5	*A1	R15	A2	R47	B2
C26	A2	D6	*A1	R16	A2	R48	B2
C27	B2			R17	A2	R49	B2
C28	A1	IC1	*A2	R18	A2	R50	B2
C29	A1	IC2	B1	R19	A1	R51	B2
C30	B1	IC3	A1	R20	A1	R52	B2
C31	B1	IC4	*A1	R21	A1	R53	B2
C32	B1	IC5	B2	R22	*A1		
C33	A2	IC6	B2	R23	*A1	*:B SIDE	

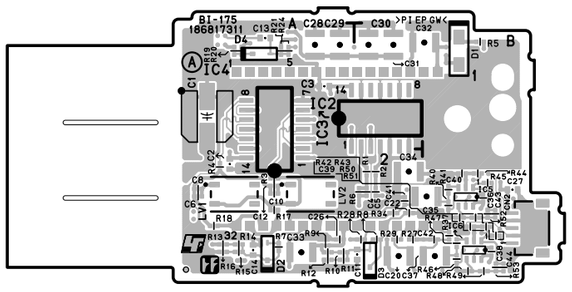


BI-175 -A SIDE-
SUFFIX: -11

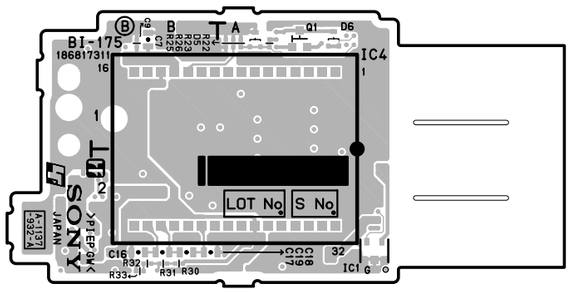


BI-175 -B SIDE-
SUFFIX: -11

BI-187 (1-865-963-11)

C1	A1	CN1	*A1	R9	A2	R37	B2
C2	A1	CN2	B2	R10	A2	R38	B2
C3	A2			R11	A2	R39	B2
C4	B2	D1	A2	R12	A2		
C5	A2	D2	A2	R13	A2	*:B SIDE	
C6	*A2	D3	B2	R14	A2		
C7	A2	D4	A1	R15	A2		
C8	*A2	D5	*A1	R16	A2		
C9	B2	D6	*A1	R17	A2		
C10	A1			R18	A1		
C11	A2	IC1	*A2	R19	A1		
C13	*B2	IC2	A1	R20	A1		
C14	*B2	IC3	*A2	R21	*A1		
C15	*B2			R22	*A1		
C16	*B2	LV1	A2	R23	A1		
C17	B2			R24	*A1		
C19	B2	Q1	*A1	R25	*A1		
C21	B2	Q2	B2	R26	A2		
C22	B1	Q3	B2	R27	B2		
C23	A2			R28	B2		
C24	B1	R1	A2	R29	B2		
C25	A1	R2	B2	R30	*B2		
C26	A1	R3	A2	R31	*B2		
C27	B1	R4	A2	R32	*B2		
C28	B1	R5	A2	R33	*B2		
C29	B2	R6	A2	R34	B2		
C30	B2	R7	B2	R35	B2		
C31	*B2	R8	A2	R36	B2		

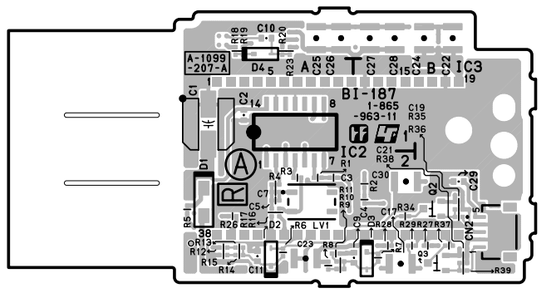


BI-187 -A SIDE-
SUFFIX: -11

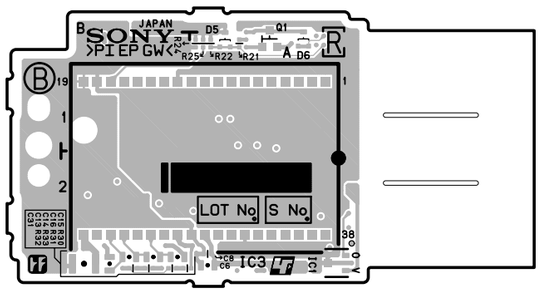


BI-187 -B SIDE-
SUFFIX: -11

BI-188 (1-865-964-11)

C1	A1	CN1	*A2	R9	A2	R37	B2
C2	A1	CN2	B2	R10	A2	R38	B2
C3	A2			R11	A2	R39	B2
C4	B2	D1	A2	R12	A2		
C5	A2	D2	A2	R13	A2	*:B SIDE	
C6	*A2	D3	B2	R14	A2		
C7	A2	D4	A1	R15	A2		
C8	*A2	D5	*A1	R16	A2		
C9	B2	D6	*A1	R17	A2		
C10	A1			R18	A1		
C11	A2	IC1	*A2	R19	A1		
C13	*B2	IC2	A1	R20	A1		
C14	*B2	IC3	*A2	R21	*A1		
C15	*B2			R22	*A1		
C16	*B2	LV1	A2	R23	A1		
C17	B2			R24	*A1		
C19	B2	Q1	*A1	R25	*A1		
C21	B2	Q2	B2	R26	A2		
C22	B1	Q3	B2	R27	B2		
C23	A2			R28	B2		
C24	B1	R1	A2	R29	B2		
C25	A1	R2	B2	R30	*B2		
C26	A1	R3	A2	R31	*B2		
C27	B1	R4	A2	R32	*B2		
C28	B1	R5	A2	R33	*B2		
C29	B2	R6	A2	R34	B2		
C30	B2	R7	B2	R35	B2		
C31	*B2	R8	A2	R36	B2		

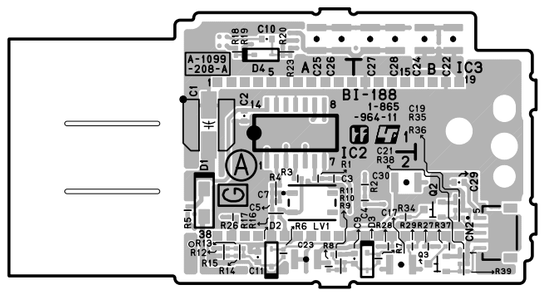


BI-188 -A SIDE-
SUFFIX: -11

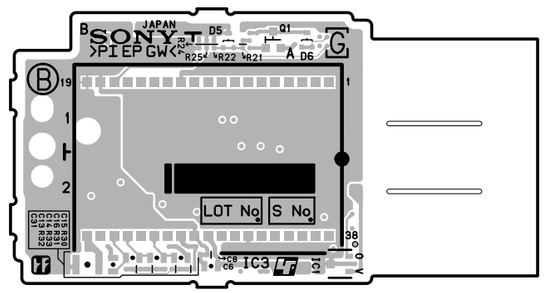


BI-188 -B SIDE-
SUFFIX: -11

BI-189 (1-865-965-11)

C1	A1	CN1	*A2	R9	A2	R37	B2
C2	A1	CN2	B2	R10	A2	R38	B2
C3	A2			R11	A2	R39	B2
C4	B2	D1	A2	R12	A2		
C5	A2	D2	A2	R13	A2	*:B SIDE	
C6	*A2	D3	B2	R14	A2		
C7	A2	D4	A1	R15	A2		
C8	*A2	D5	*A1	R16	A2		
C9	B2	D6	*A1	R17	A2		
C10	A1			R18	A1		
C11	A2	IC1	*A2	R19	A1		
C13	*B2	IC2	A1	R20	A1		
C14	*B2	IC3	*A2	R21	*A1		
C15	*B2			R22	*A1		
C16	*B2	LV1	A2	R23	A1		
C17	B2			R24	*A1		
C19	B2	Q1	*A1	R25	*A1		
C21	B2	Q2	B2	R26	A2		
C22	B1	Q3	B2	R27	B2		
C23	A2			R28	B2		
C24	B1	R1	A2	R29	B2		
C25	A1	R2	B2	R30	*B2		
C26	A1	R3	A2	R31	*B2		
C27	B1	R4	A2	R32	*B2		
C28	B1	R5	A2	R33	*B2		
C29	B2	R6	A2	R34	B2		
C30	B2	R7	B2	R35	B2		
C31	*B2	R8	A2	R36	B2		

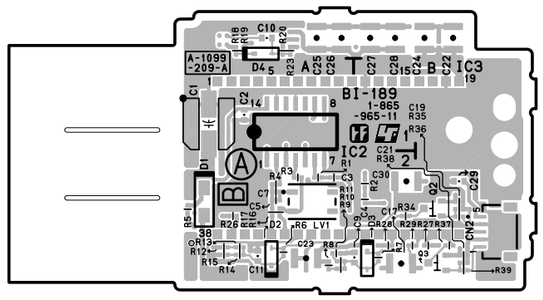

BI-189 -A SIDE-
SUFFIX: -11

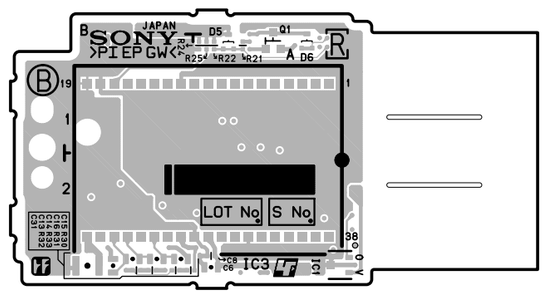


BI-189 -B SIDE-
SUFFIX: -11


CN-2578, CN-2579, CN-2602, CN-2605

CN-2578 (1-865-974-13)


C1	*A1	IC11	B1	R31	A1
C2	*A1	IC12	A1	R32	A1
C3	B2	IC13	A1	R33	B2
C4	*B1	IC14	A1	R34	B2
C5	A1			R35	B2
C6	B1	L1	*B1	R36	B2
C7	A1			R37	B1
C8	B1	Q1	A1	R38	B1
C9	A1	Q2	A1	R39	B1
C10	B1			R40	B1
C11	*A1	R1	B2	R41	A1
C12	*A1	R2	B2	R42	A1
C13	A1	R3	B2	R43	A1
C14	*A1	R4	B2	R44	A1
C15	B1	R5	B2		
C16	B2	R6	B2	*:B SIDE	
C17	B2	R7	B2		
C18	B2	R8	B2		
C19	B1	R9	*B1		
C20	B1	R10	B1		
C21	B1	R11	B1		
C22	A1	R12	B1		
C23	A1	R13	B1		
C24	A1	R14	B1		
		R15	B1		
CN1	B1	R16	B1		
CN2	B1	R17	B1		
CN3	B2	R18	B1		
CN4	A1	R19	A1		
		R20	A1		
IC1	B2	R21	B1		
IC2	A1	R22	B1		
IC3	B1	R23	B1		
IC4	A1	R24	B1		
IC5	B1	R25	A1		
IC6	B2	R26	A1		
IC7	B2	R27	A1		
IC8	B2	R28	A1		
IC9	B1	R29	A1		
IC10	B1	R30	A1		

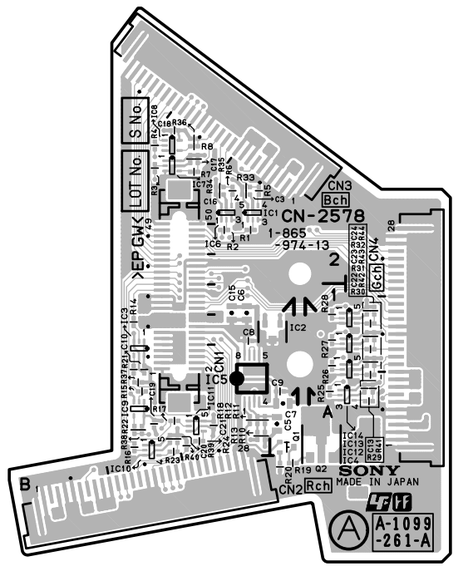


CN-2578 -A SIDE-
SUFFIX: -13

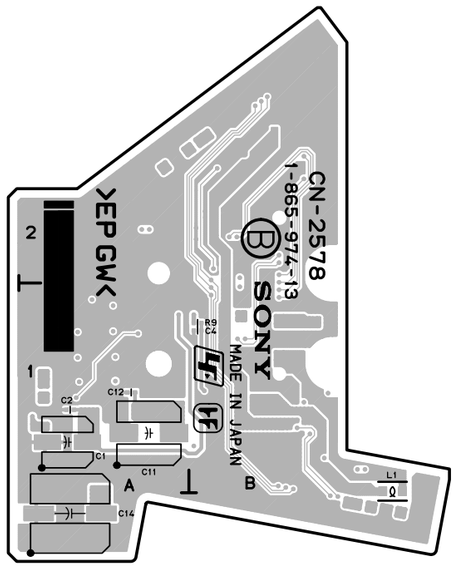


CN-2578 -B SIDE-
SUFFIX: -13




CN-2602 -A SIDE-
SUFFIX: -11




CN-2602 -B SIDE-
SUFFIX: -11




CN-2605 -A SIDE-
SUFFIX: -11




CN-2605 -B SIDE-
SUFFIX: -11

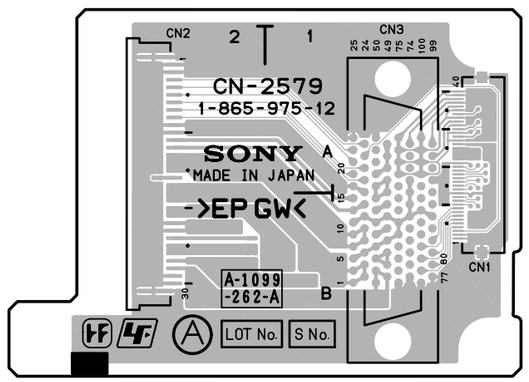


CN-2579 -A SIDE-
SUFFIX: -12

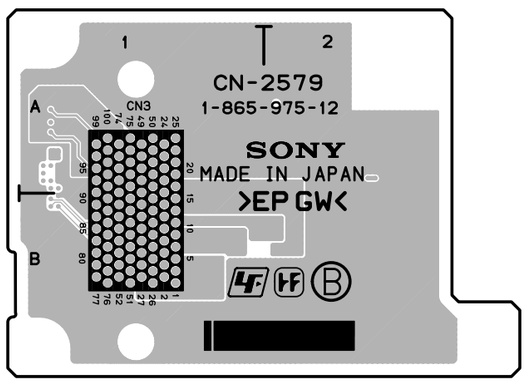

CN-2579 -B SIDE-
SUFFIX: -12

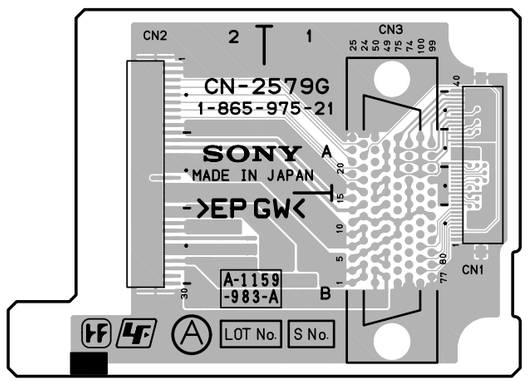


CN-2579 -A SIDE-
SUFFIX: -21

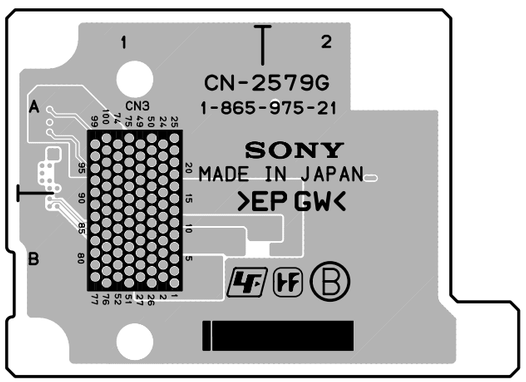


CN-2579 -B SIDE-
SUFFIX: -21

CN-2603 (1-867-456-11)

C1	A2	JC1	A1
C2	C2		
C3	A2	R1	*A1
C4	C2	R2	*C1
C5	A2	R3	*A2
C6	C2	R4	*B2
C7	B2	R5	*B2
C8	B2	R6	*C2
C9	A1		
C10	C1	RV1	A1
C11	A1	RV2	C1
C12	C1	RV3	A2
C13	A1	RV4	B2
C14	C1	RV5	B2
C15	A1	RV6	C2
C16	C1		
C17	A1	S1	B1
C18	C1	S2	C1
C19	B1	S3	A1
		S4	B1
CN1	*B1		
CN2	A2	*:B SIDE	
CN3	C2		

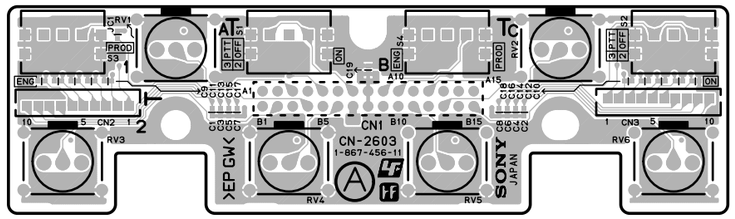


CN-2603 -A SIDE-
SUFFIX: -11

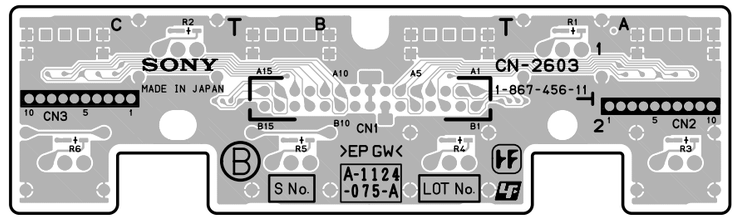


CN-2603 -B SIDE-
SUFFIX: -11

CN-2603 (1-867-456-12)

C1	A2	R1	*A1
C2	C2	R2	*C1
C3	A2	R3	*A2
C4	C2	R4	*B2
C5	A2	R5	*B2
C6	C2	R6	*C2
C7	B2	R7	*B1
C8	B2	R8	*C1
C9	A1	R9	*A2
C10	C1	R10	*A2
C11	A1		
C12	C1	RV1	A1
C13	A1	RV2	C1
C14	C1	RV3	A2
C15	A1	RV4	B2
C16	C1	RV5	B2
C17	A1	RV6	C2
C18	C1		
C19	B1	S1	B1
		S2	C1
CN1	*B1	S3	A1
CN2	A2	S4	B1
CN3	C2		
		*:B SIDE	
JC1	A1		

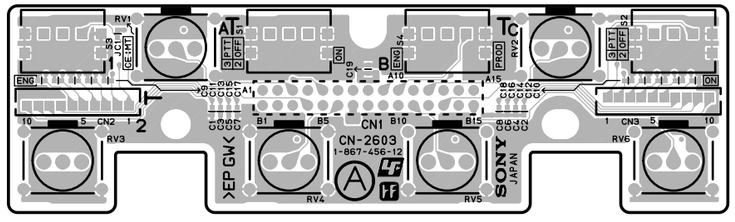


CN-2603 -A SIDE-
SUFFIX: -12

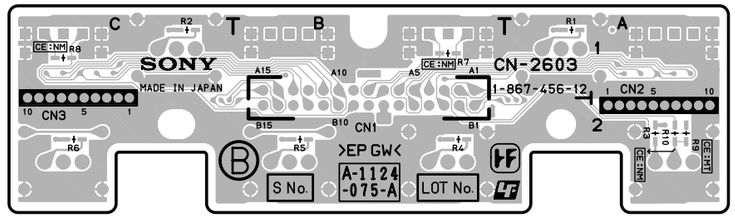


CN-2603 -B SIDE-
SUFFIX: -12

CN-2604 (1-867-457-11)

C1	B1	C20	A2	FB8	A2
C2	B2	C21	A2	FB9	B2
C3	A1	C22	A2	FB10	B2
C4	B2	C23	A1	FB11	B1
C5	B2	C24	A1	FB12	B1
C6	B2			FB13	B1
C7	B2	CN1	A1	FB14	A1
C8	B2	CN2	*B2	FB15	A1
C9	B1	CN3	*B2		
C10	B2	CN4	*A2	SL1	B1
C11	B2	CN5	*A2		
C12	B2			THP1	B1
C13	B2	FB1	B1	THP2	B1
C14	B2	FB2	B2	THP3	A2
C15	B2	FB3	B2		
C16	B1	FB4	A2	*:B SIDE	
C17	B2	FB5	B2		
C18	B1	FB6	B2		
C19	A1	FB7	B2		

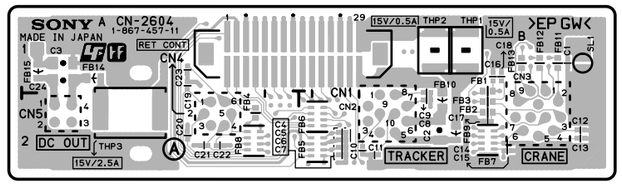


CN-2604 -A SIDE-
SUFFIX: -11

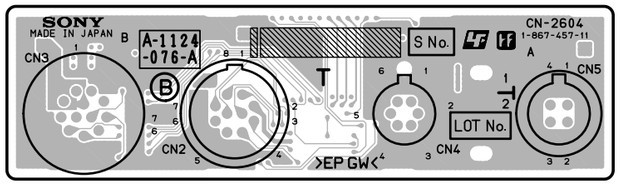


CN-2604 -B SIDE-
SUFFIX: -11

CN-2604 (1-867-457-12)

C1	B1	C20	A2	FB7	B2
C2	B2	C21	A2	FB8	A2
C3	A1	C22	A2	FB9	B2
C4	B2	C23	A1	FB10	B2
C5	B2	C24	A1	FB11	B1
C6	B2	C25	A2	FB12	B1
C7	B2			FB13	B1
C8	B2	CN1	A1	FB14	A1
C9	B1	CN2	*B2	FB15	A1
C10	B2	CN3	*B2		
C11	B2	CN4	*A2	SL1	B1
C12	B2	CN5	*A2		
C13	B2			THP1	B1
C14	B2	FB1	B1	THP2	B1
C15	B2	FB2	B2	THP3	A2
C16	B1	FB3	B2		
C17	B2	FB4	A2	*:B SIDE	
C18	B1	FB5	B2		
C19	A1	FB6	B2		

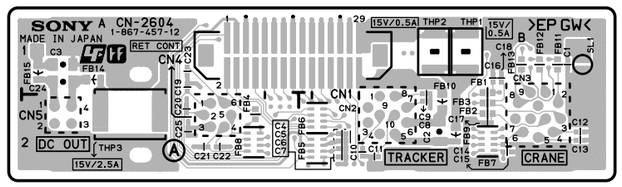


CN-2604 -A SIDE-
SUFFIX: -12

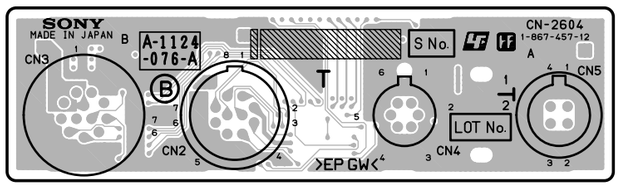


CN-2604 -B SIDE-
SUFFIX: -12

CN-2606 (1-867-459-11)

C1	*A1	FL4	C1	R20	*B1
C2	*A2	FL5	B1	R21	*A1
C3	*A1	FL6	C1	R22	*C1
C4	*C1			R23	*B1
C5	*C2	R1	*B1	R24	*C1
C6	*C1	R2	*B2		
		R3	*B1	S1	B2
CN1	B1	R4	*B2	S2	C2
CN2	A2	R5	*A1	S3	A2
CN3	C2	R6	*A2	S4	B2
CN4	A2	R7	*A1		
CN5	C2	R8	*B2	*:B SIDE	
		R9	*A1		
FB1	*A1	R10	*A1		
FB2	*A2	R11	*B1		
FB3	*A1	R12	*B1		
FB4	*C1	R13	*B1		
FB5	*C2	R14	*C1		
FB6	*C1	R15	*C1		
		R16	*B1		
FL1	A1	R17	*C1		
FL2	B1	R18	*C1		
FL3	A1	R19	*A1		

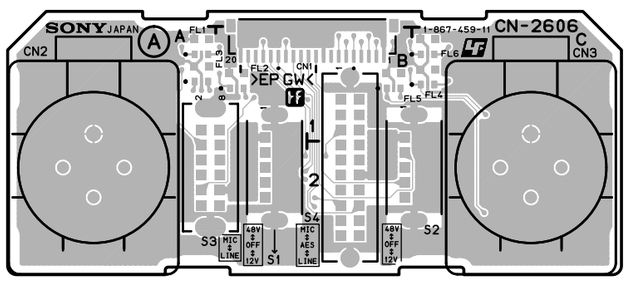


CN-2606 -A SIDE-
SUFFIX: -11

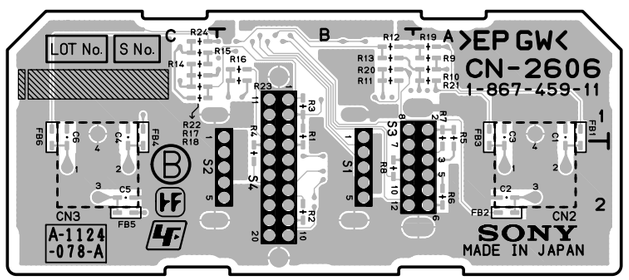


CN-2606 -B SIDE-
SUFFIX: -11

CN-2607, CN-2608, CN-2609

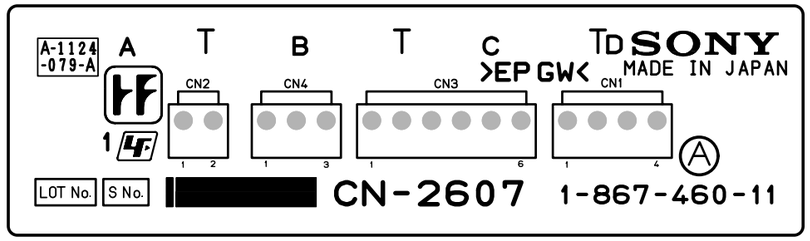

CN-2607 -A SIDE-
SUFFIX: -11

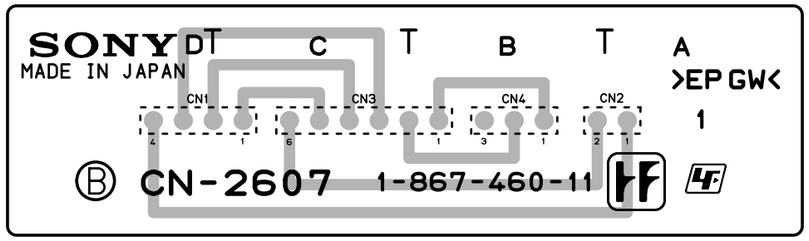


CN-2607 -B SIDE-
SUFFIX: -11


CN-2608 (1-867-408-11)

C1	*A2
CN1	B1
CN2	A2
D1	*B2
Q1	*B2
Q2	*B2
R1	*B2
R2	*B2


*:B SIDE

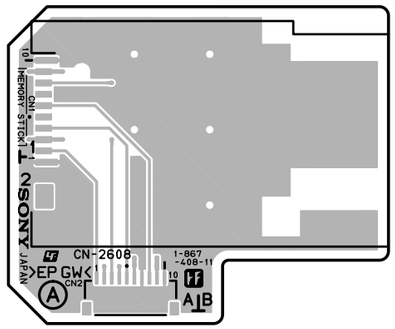


CN-2608 -A SIDE-
SUFFIX: -11

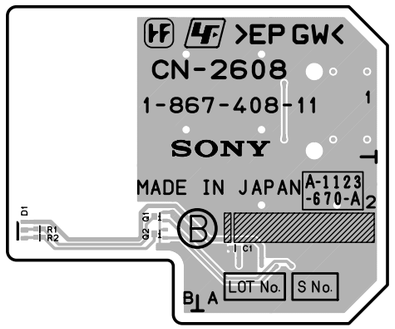


CN-2608 -B SIDE-
SUFFIX: -11

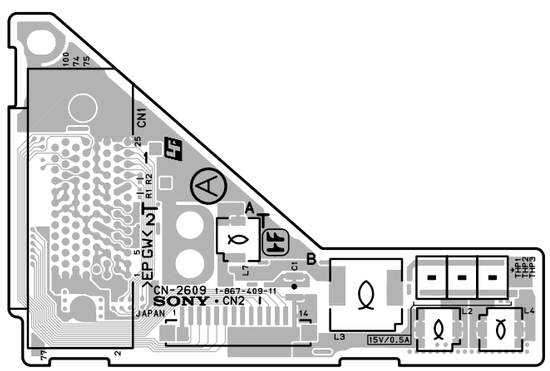


CN-2609 -A SIDE-
SUFFIX: -11

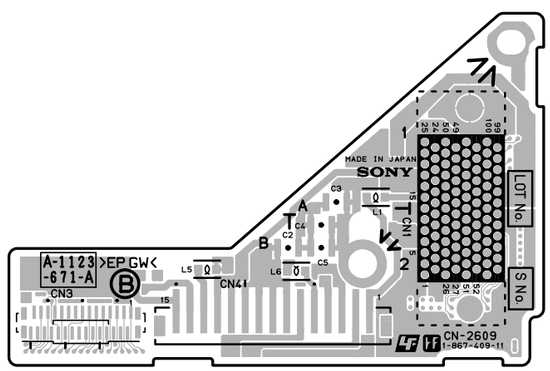

CN-2609 -B SIDE-
SUFFIX: -11

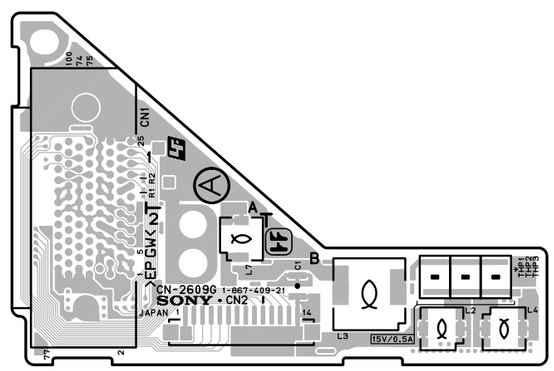


CN-2609 -A SIDE-
SUFFIX: -21

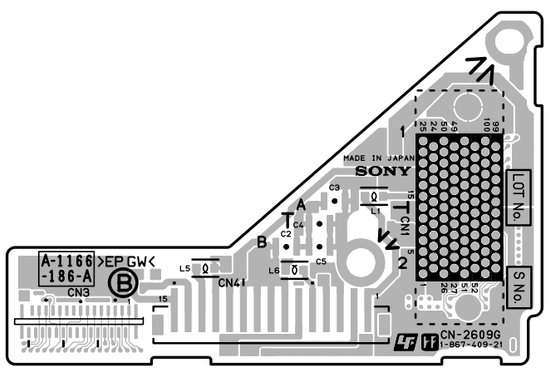


CN-2609 -B SIDE-
SUFFIX: -21

5-10


CN-2614, CN-2615, CN-2616, CN-2617, CN-2618




CN-2614 -A SIDE-
SUFFIX: -12




CN-2614 -B SIDE-
SUFFIX: -12

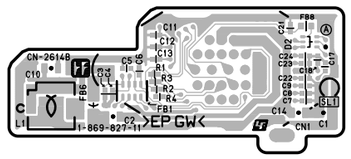


CN-2614B -A SIDE-
SUFFIX: -11

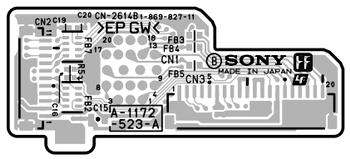


CN-2614B -B SIDE-
SUFFIX: -11




CN-2616 -A SIDE-
SUFFIX: -12




CN-2616 -B SIDE-
SUFFIX: -12




CN-2618 -A SIDE-
SUFFIX: -12



CN-2618 -B SIDE-
SUFFIX: -12




CN-2615 -A SIDE-
SUFFIX: -12




CN-2615 -B SIDE-
SUFFIX: -12

CN-2617 (1-865-938-13)

C1	*B2	D6	B1	R11	*B2
C2	*A1	D7	*B1	R12	A1
C3	*B2				
C4	B1	IC1	*A2	RB1	*B1
C5	*B2	IC2	*A1	RB2	*A1
C6	*B2			RB3	*B1
		Q1	*B1	RB4	*B2
CN2	*B1	Q2	*B1	RB5	*A2
CN3	*A2	Q3	A1	RB6	*A1
CN4	*B2	Q4	A1	RB7	*B1
CN5	*B2			RB8	*B2
CN6	B2	R1	*B1	RB9	*A1
CN7	*B2	R2	B1	RB10	*A1
CN8	*B1	R3	*B1	RB11	*A1
CN9	*B2	R4	*B1	RB12	*A1
		R5	*B2	RB13	*A2
D1	*B1	R6	*B2	RB14	*B1
D2	*B1	R7	A1		
D3	A1	R8	*A1	SL1	*B2
D4	*B1	R9	*A1		
D5	*B1	R10	*B2	*:B SIDE	

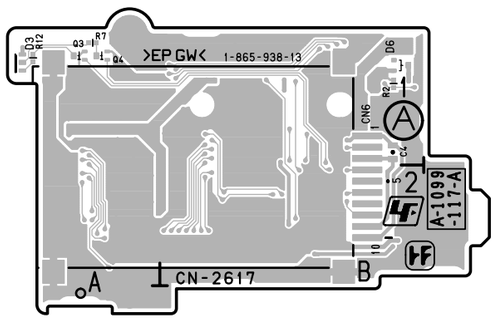


CN-2617 -A SIDE-
SUFFIX: -13

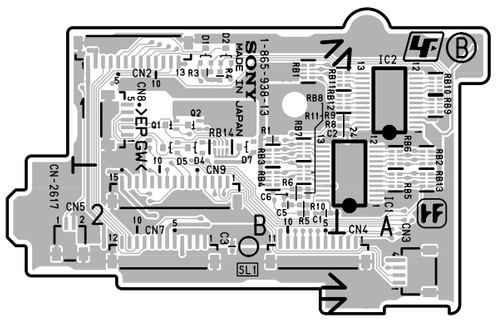


CN-2617 -B SIDE-
SUFFIX: -13

CN-2619 (1-865-940-21)


C1	*A2	CN4	A2
C2	*B2	CN5	B2
C3	*B2	CN6	A1
C4	*B2	CN7	*B1
C5	*A2	CN8	A2
C6	*A2		
C7	*A2	FB1	*B2
C8	*A2	FB2	*B2
C9	*A1	FB3	*B1
C10	*A1	FB4	*A1
C11	*A2	FB5	A2
C12	*A1	FB6	*A2
C13	*B2	FB7	*A1
C14	*B2	FB8	*A2
C15	*B2	FB9	*A1
C16	*B2	FB10	*A2
C17	*B2	FB11	*A2
C18	*B2	FB12	*B1
C19	*B2	FB13	*B1
C20	*A1	FB14	*B1
C21	*A1	FB15	B1
C22	*A1	FB16	B1
C23	*A1	FB17	A2
C24	*A1	FB18	A2
C25	A2		
C26	*A2	S1	B2
C27	*A1		
C28	*B2	SL1	*A1
C29	*A1		
C30	*A2	THP1	*A2
		THP2	*A2
CN1	*B1		
CN2	*A2	*:B SIDE	
CN3	*B1		

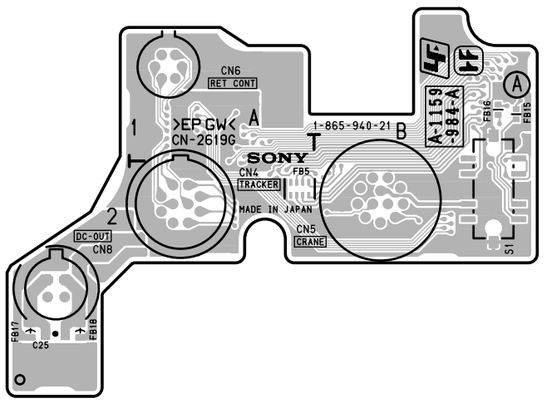


CN-2619 -A SIDE-
SUFFIX: -21

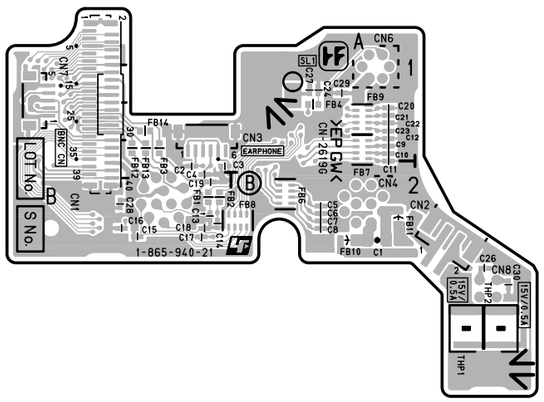

CN-2619 -B SIDE-
SUFFIX: -21




CN-2620 -A SIDE-
SUFFIX: -12




CN-2620 -B SIDE-
SUFFIX: -12

CN-2619 (1-865-940-12)

C1	*A2	CN4	A2
C2	*B2	CN5	B2
C3	*B2	CN6	A1
C4	*B2	CN7	*B1
C5	*A2	CN8	A2
C6	*A2		
C7	*A2	FB1	*B2
C8	*A2	FB2	*B2
C9	*A1	FB3	*B1
C10	*A1	FB4	*A1
C11	*A1	FB5	A2
C12	*A1	FB6	*A2
C13	*B2	FB7	*A1
C14	*B2	FB8	*A2
C15	*B2	FB9	*A1
C16	*B2	FB10	*A2
C17	*B2	FB11	*A2
C18	*B2	FB12	*B1
C19	*B2	FB13	*B1
C20	*A1	FB14	*B1
C21	*A1	FB15	B1
C22	*A1	FB16	B1
C23	*A1	FB17	A2
C24	*A1	FB18	A2
C25	A2		
C26	*A2	S1	B2
C27	*A1		
C28	*B2	SL1	*A1
C29	*A1		
C30	*A2	THP1	*A2
		THP2	*A2
CN1	*B1		
CN2	*A2	*:B SIDE	
CN3	*B1		

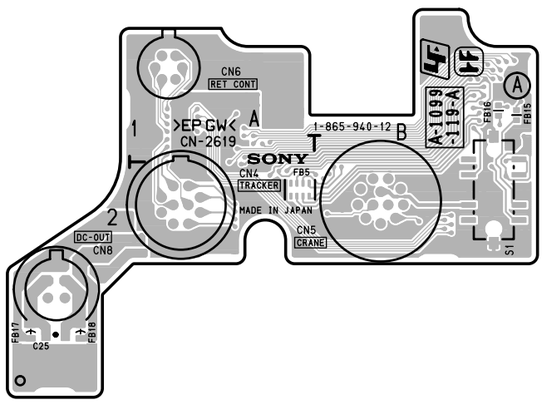


CN-2619 -A SIDE-
SUFFIX: -12

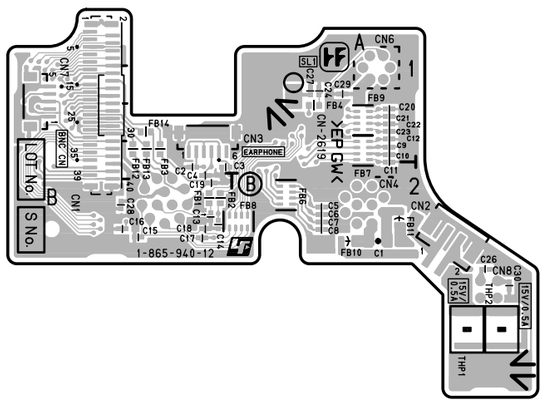


CN-2619 -B SIDE-
SUFFIX: -12

CN-2621 (1-865-942-21)

C3	*B2	R4	*A2		
C4	*B2	R5	*A2		
C5	*B2	R6	*A2		
C6	*B2	R7	*B2		
C9	*A2	R8	*B2		
C10	*A2	R9	*B2		
C11	*A2	R10	*B2		
C12	*B2	R11	*A2		
C13	*B2	R12	*A2		
C14	*B2	R13	*A2		
C19	*A1	R14	*A2		
C20	*A1	R15	*A2		
C21	*A1	R16	*B2		
		R17	*B2		
CN1	*A1	R18	*B2		
		R19	*B2		
D1	*A1	R20	*B2		
D2	*A1	R21	*A2		
		R22	*A2		
FB1	*B2	R23	*A2		
FB6	*A2	R24	*B2		
FB7	*A2	R25	*B2		
FB8	*A2	R26	*B2		
FB9	*B2	R28	*B2		
FB10	*B2	R29	*A1		
FB11	*B2	R30	*A1		
FB12	*A1	R31	*A1		
FL1	*A2	RB1	*A1		
FL2	*A2				
FL3	*A2	*:B SIDE			
FL4	*B2				
FL5	*B2				
FL6	*B2				
R1	*A1				
R2	*A1				
R3	*A2				

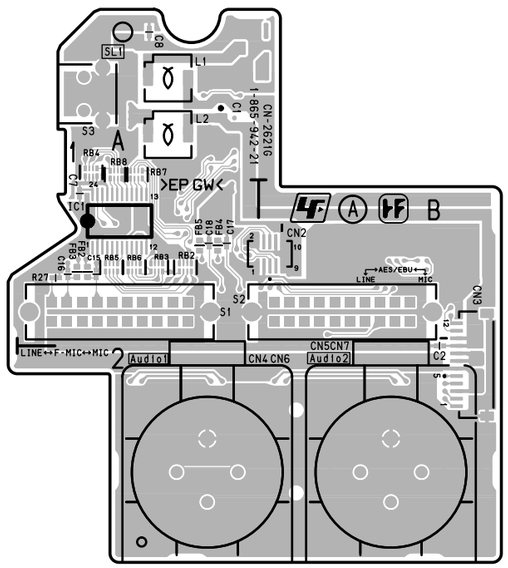


CN-2621 -A SIDE-
SUFFIX: -21

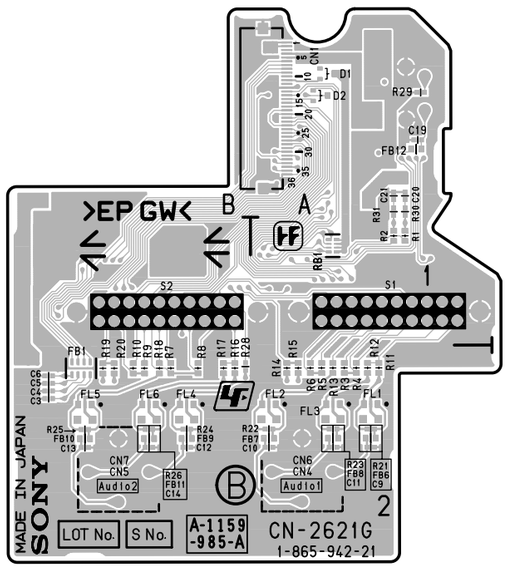


CN-2621 -B SIDE-
SUFFIX: -21

CN-2621 (1-865-942-13)

C1	A1	FB4	A1	R15	*A2
C2	B1	FB5	A1	R16	*B2
C3	*B2	FB6	*A2	R17	*B2
C4	*B2	FB7	*A2	R18	*B2
C5	*B2	FB8	*A2	R19	*B2
C6	*B2	FB9	*B2	R20	*B2
C7	A1	FB10	*B2	R21	*A2
C8	A1	FB11	*B2	R22	*A2
C9	*A2	FB12	*A1	R23	*A2
C10	*A2			R24	*B2
C11	*A2	FL1	*A2	R25	*B2
C12	*B2	FL2	*A2	R26	*B2
C13	*B2	FL3	*A2	R27	A1
C14	*B2	FL4	*B2	R28	*B2
C15	A1	FL5	*B2	R29	*A1
C16	A1	FL6	*B2	R30	*A1
C17	A1			R31	*A1
C18	A1	IC1	A1		
C19	*A1			RB1	*A1
C20	*A1	L1	A1	RB2	A1
C21	*A1	L2	A1	RB3	A1
				RB4	A1
CN1	*A1	R1	*A1	RB5	A1
CN2	B1	R2	*A1	RB6	A1
CN3	B2	R3	*A2	RB7	A1
CN4	A2	R4	*A2	RB8	A1
CN5	B2	R5	*A2		
CN6	A2	R6	*A2	S1	A1
CN7	B2	R7	*B2	S2	B1
		R8	*B2	S3	A1
D1	*A1	R9	*B2		
D2	*A1	R10	*B2	SL1	A1
		R11	*A2		
FB1	*B2	R12	*A2	*:B SIDE	
FB2	A1	R13	*A2		
FB3	A1	R14	*A2		

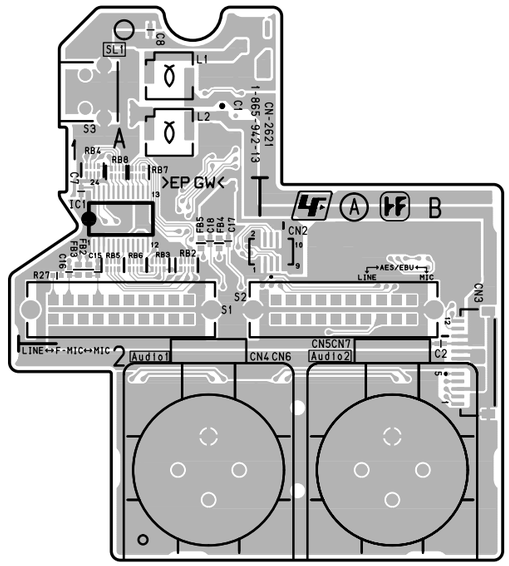

CN-2621 -A SIDE-
SUFFIX: -13

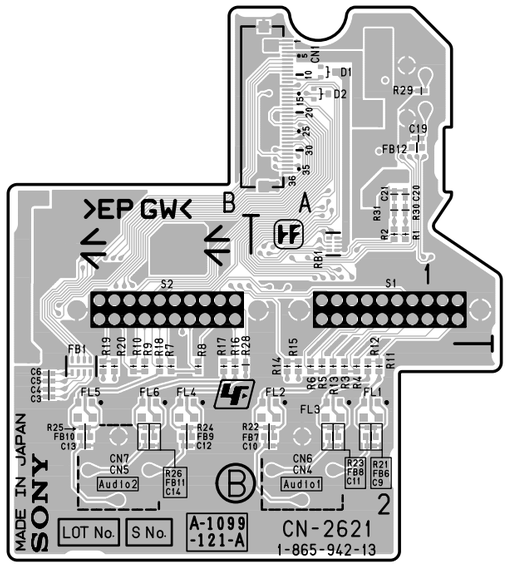


CN-2621 -B SIDE-
SUFFIX: -13




CN-2622 -A SIDE-
SUFFIX: -13




CN-2622 -B SIDE-
SUFFIX: -13




CN-2623 -A SIDE-
SUFFIX: -13




CN-2623 -B SIDE-
SUFFIX: -13




CN-2640 -A SIDE-
SUFFIX: -12



CN-2640 -B SIDE-
SUFFIX: -12




CN-2671 -A SIDE-
SUFFIX: -11




CN-2671 -B SIDE-
SUFFIX: -11

CN-2712 (1-865-962-11)


C1	*A1	IC9	B1	R27	A1
C2	B2	IC10	B1	R28	A1
C3	*A1	IC11	A1	R29	A1
C4	A1	IC12	A1	R30	A1
C5	A1	IC13	A1	R31	A1
C6	A1	IC14	A1	R32	A1
C7	A1			R33	B2
C8	B1	L1	*B1	R34	A2
C9	A1			R35	B2
C10	A1	Q1	A1	R36	B2
C11	*A1	Q2	A1	R37	B1
C12	*B1			R38	B1
C13	A1	R1	B2	R39	B1
C14	*A1	R2	A2	R40	A1
C15	B1	R3	B2	R41	A1
C16	A2	R4	B2	R42	A1
C17	B2	R5	B2	R43	A1
C18	B2	R6	A2	R44	A1
C19	B1	R7	B2		
C20	B1	R8	B2	*:B SIDE	
C21	A1	R9	A1		
C22	A1	R10	B1		
C23	A1	R11	B1		
C24	A1	R12	B1		
		R13	A1		
CN1	B1	R14	A1		
CN2	B1	R15	A1		
CN3	B2	R16	A1		
CN4	A1	R17	A1		
		R18	B1		
IC1	B2	R19	B1		
IC2	A1	R20	B1		
IC3	B1	R21	A1		
IC4	A1	R22	A1		
IC5	A1	R23	A1		
IC6	A2	R24	A1		
IC7	B2	R25	A1		
IC8	B2	R26	A1		

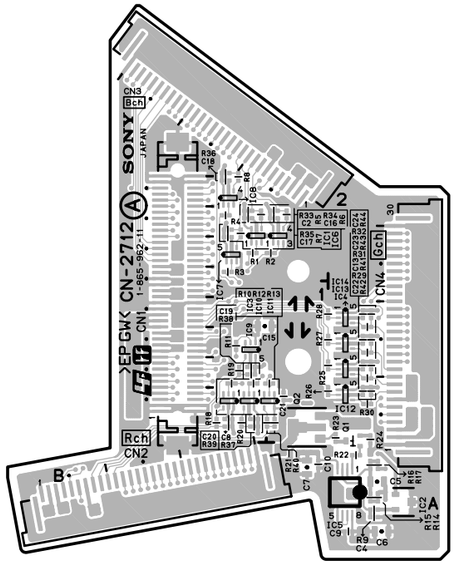


CN-2712 -A SIDE-
SUFFIX: -11

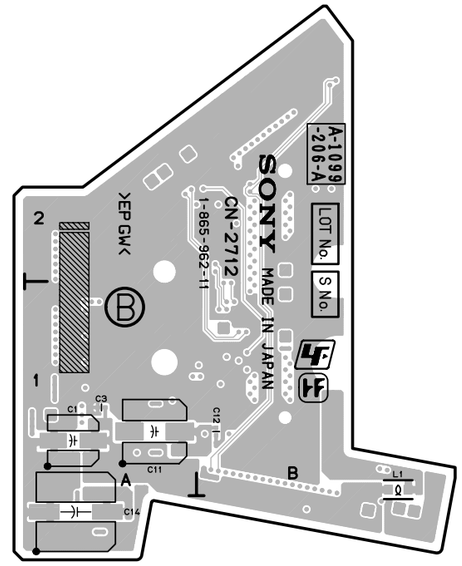


CN-2712 -B SIDE-
SUFFIX: -11

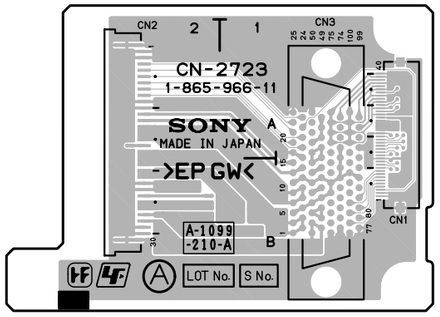


CN-2723 -A SIDE-
SUFFIX: -11

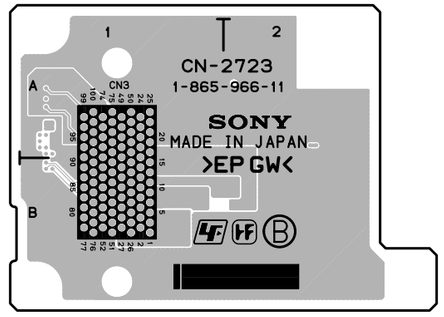

CN-2723 -B SIDE-
SUFFIX: -11

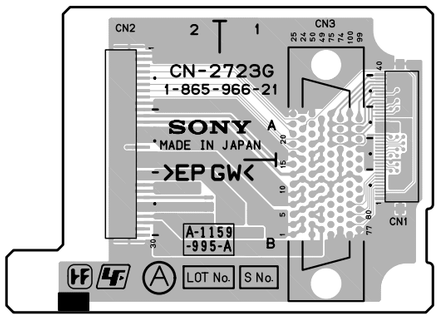


CN-2723 -A SIDE-
SUFFIX: -21

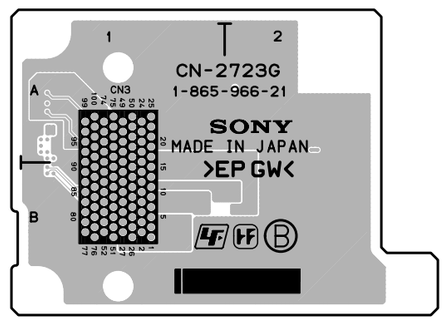


CN-2723 -B SIDE-
SUFFIX: -21

DAP-33 (1-865-932-12)

BT1	A1	C225	*D2	C404	*B1	D451	*A1
		C226	*D2	C405	*B1	D452	*A1
C1	E3	C227	*D2	C406	*B1	D453	*A2
C2	E3	C228	*D2	C407	*B1	D454	*A2
C3	*E3	C230	*D2	C408	*B2	D455	*A3
C4	E3	C231	*D2	C409	*B2		
C5	E3	C232	*D2	C410	B2	E1	B2
C6	E3	C234	*D2	C411	B2	E2	*B2
C7	E3	C235	*D2	C412	*B2		
C8	*E3	C236	*D2	C413	*A2	FB2	D2
C10	E3	C237	*D2	C414	*B2	FB3	D2
C11	*D1	C238	*D2	C415	*B2		
C12	*D1	C239	*D2	C416	B2	IC1	E3
C13	*D1	C241	*D2	C417	B2	IC2	A2
C21	*A3	C242	*D2	C418	*B2	IC3	A2
C22	*A3	C243	*D2	C419	*B2	IC4	D3
C23	*A3	C245	*D1	C420	*B2	IC11	*D1
C24	*A3	C246	*D1	C421	*A2	IC61	C1
C25	A3	C247	*D1	C422	B2	IC62	C1
C26	*A3	C248	*D1	C423	*B3	IC63	C1
C27	A3	C249	*E1	C424	*B2	IC64	C1
C28	*A2	C250	*D1	C425	*B3	IC75	E2
C29	*A2	C251	*D2	C426	*B3	IC81	*B1
C30	A2	C252	*D2	C427	B3	IC82	E2
C31	A3	C253	*D2	C428	B3	IC83	*E2
C32	*A2	C258	*D2	C429	*B3	IC84	*E2
C33	*A2	C271	*C2	C430	B2	IC201	D2
C34	A2	C272	*C2	C451	*A1	IC202	D1
C35	A2	C273	C2	C452	*A2	IC203	*C1
C36	A1	C274	C2	C453	*A1	IC205	*C2
C37	*A2	C275	*C2	C454	*A1	IC207	*D3
C38	A3	C276	*C2	C455	*A1	IC211	E1
C39	*B3	C277	C2	C456	*A1	IC212	E1
C41	*D3	C278	C2	C457	*A1	IC213	D1
C42	D3	C279	*C3	C458	*A2	IC214	E1
C43	D3	C280	*C2	C459	*A2	IC271	C2
C44	D3	C281	C2	C460	A2	IC272	C3
C45	D3	C282	C2	C461	A2	IC273	C3
C46	*D3	C283	C2	C462	A2	IC274	*C1
C47	*E3	C284	C2	C463	A2	IC275	*C1
C48	*D3	C285	D3	C464	*A2	IC276	*C2
C49	*D3	C286	C3	C465	*A2	IC301	C2
C50	E3	C287	*C3	C466	*A2	IC302	C3
C51	*D3	C288	*C3	C467	*A2	IC303	C3
C52	E3	C289	C1	C468	*A2	IC304	C3
C53	E2	C290	C1	C469	*A2	IC305	*C3
C54	E1	C291	C2	C470	*A2	IC306	*C3
C55	*E2	C301	C2	C471	*A2	IC351	*B1
C56	*E2	C302	*C2	C472	A2	IC352	B2
C58	*E1	C303	*C2	C473	*A2	IC353	B2
C59	E1	C304	C2	C474	A3	IC354	B2
C60	E2	C305	*C2	C475	A3	IC355	*B3
C61	*E2	C306	C2	C476	*A3	IC356	*B3
C62	*E2	C307	*C2	C477	*A3	IC401	*B1
C63	*E2	C308	C2			IC402	B2
C64	*E2	C309	C2	CL1	E3	IC403	B2
C65	*C1	C310	*C3	CL2	A2	IC404	B2
C66	*C1	C311	*C3	CL3	A2	IC405	*B2
C67	*C1	C312	*C3	CL4	E3	IC451	*A1
C68	*C1	C313	*C2	CL15	E2	IC452	*A3
C69	*C1	C314	C2	CL16	E2	IC453	A2
C70	*C1	C315	C2	CL17	E2	IC454	A2
C71	*C1	C316	C3	CL18	E2	IC455	A2
C72	*C1	C317	C3			IC456	A2
C74	B1	C318	C3	CN1	C3	IC457	*B2
C75	*B1	C319	C3	CN2	D1	IC458	*B2
C76	*C1	C320	C3				
C77	*C1	C321	*C3	D1	*E3	L1	E3
C201	*E1	C351	*B2	D2	*A3	L2	*B3
C202	*E1	C352	*B1	D3	A3	L3	*A3
C203	*D1	C353	*B1	D52	*B1	L4	A3
C204	*E1	C354	*B1	D53	*A1	L6	D3
C205	*E1	C355	*B1	D271	*C2	L7	*D3
C206	*E1	C356	*B1	D272	*C2	L8	*A2
C207	*E1	C357	*B1	D273	*C2	L9	A2
C208	*E1	C358	*B2	D274	*C2	L52	*E1
C209	*E1	C359	*B2	D275	*D3	L201	*E1
C210	*E1	C360	B2	D276	*C3	L202	*E1
C211	*E1	C361	B2	D277	*C3	L203	*D1
C212	*D1	C362	B2	D278	*C3	L204	*D1
C213	*E1	C363	B2	D301	*C2	L205	*D1
C214	*E1	C364	*B2	D302	*C2	L206	*D1
C215	*E1	C365	*B2	D303	*C3	L252	*C2
C216	*E1	C366	*B2	D304	*C3	L301	*C2
C217	*D2	C367	*B2	D351	*B1	L351	*B1
C218	*C1	C368	*B2	D352	*B1	L401	*A1
C219	*C1	C369	*B2	D353	*B2	L402	*B3
C220	*D1	C370	*B2	D354	*B2	L451	*A1
C221	*D1	C371	*B3	D401	*A1		
C222	*C1	C401	*B1	D402	*A1	Q1	*E3
C223	C1	C402	*B1	D403	*B2	Q2	*A3
C224	*D1	C403	*B2	D404	*B2	Q3	A3

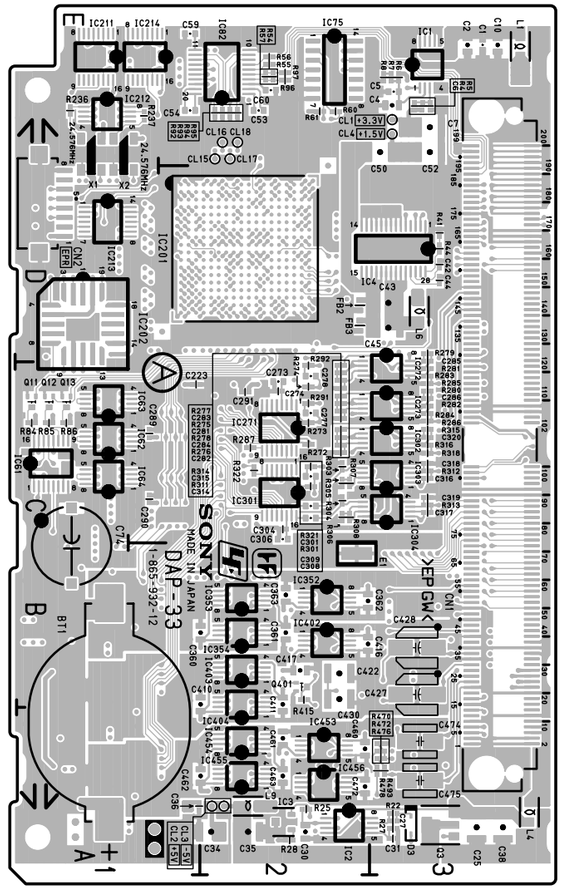

DAP-33 -A SIDE-
SUFFIX: -12

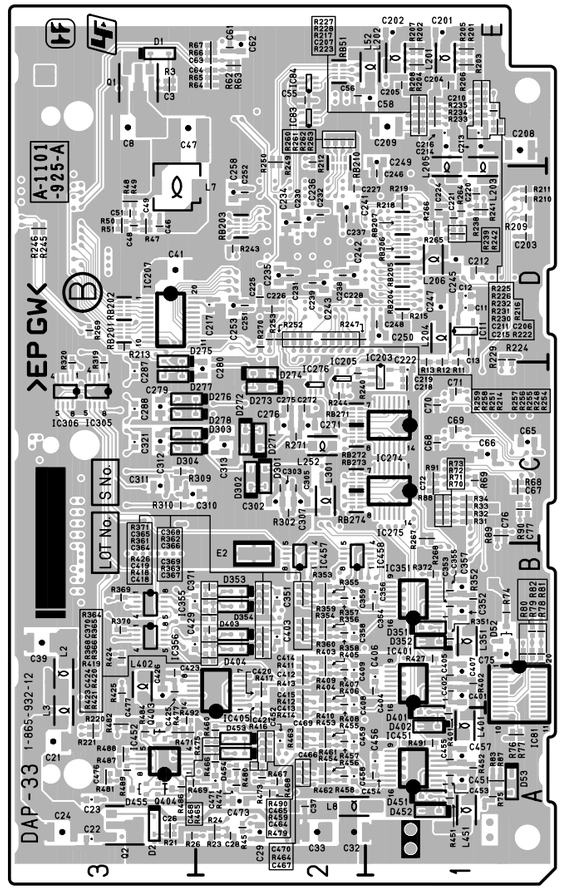


DAP-33 -B SIDE-
SUFFIX: -12


Q11	C1	R215	*D1	R319	*C3	RB51	*E2
Q12	C1	R216	*E1	R320	*C3	RB201	*D3
Q13	C1	R217	*E1	R321	C2	RB202	*D3
Q401	B2	R218	*D1	R322	C2	RB203	*D2
Q403	*A3	R219	*D1	R351	*B1	RB204	*D1
Q404	*A3	R220	*A3	R352	*B1	RB205	*D1
		R221	*A3	R353	*B2	RB206	*D1
R3	*E3	R222	*E1	R354	*B2	RB207	*D1
R4	E3	R223	*E1	R355	*B2	RB210	*E2
R5	E3	R224	*D1	R356	*B2	RB271	*C2
R6	E3	R225	*E1	R357	*B2	RB272	*C2
R7	E3	R226	*E1	R358	*B2	RB273	*C2
R8	E3	R227	*E1	R359	*B2	RB274	*C2
R11	*D1	R228	*E1	R360	*B2		
R12	*D1	R229	*D1	R361	*B2	X1	E1
R13	*D1	R230	*E1	R362	*B2	X2	E1
R21	*A3	R231	*E1	R363	*B2		
R22	A3	R232	*E1	R364	*B2	*:B SIDE	
R23	*A2	R233	*E1	R365	*B2		
R24	*A2	R234	*E1	R366	*B2		
R25	A2	R235	*E1	R368	*B2		
R26	*A3	R236	E1	R369	*B3		
R27	A3	R237	E1	R370	*B3		
R28	A2	R238	*D1	R371	*B2		
R31	*C1	R239	*D1	R372	*B1		
R32	*C1	R240	*C2	R401	*A1		
R33	*C1	R241	*D1	R402	*B1		
R34	*C1	R242	*D1	R403	*B2		
R41	D3	R243	*D2	R404	*B2		
R44	D3	R244	*C2	R405	*B2		
R45	*A2	R245	*D3	R406	*B2		
R47	*D3	R246	*D3	R407	*B2		
R48	*D3	R247	*D2	R408	*B2		
R49	*D3	R248	*D2	R409	*B2		
R50	*D3	R249	*E2	R410	*A2		
R51	*D3	R250	*E2	R411	*B2		
R54	E2	R251	*D2	R412	*B2		
R55	E2	R252	*D2	R413	*B2		
R56	E2	R253	*D2	R414	*A2		
R57	E2	R254	*D2	R415	B2		
R60	E2	R255	*D2	R416	*B2		
R61	E2	R256	*D2	R417	*B2		
R62	*E2	R257	*D2	R418	*B2		
R63	*E2	R258	*D2	R419	*B2		
R64	*E2	R259	*D2	R420	*B2		
R65	*E2	R260	*E2	R421	*B2		
R66	*E2	R261	*E2	R423	*B2		
R67	*E2	R262	*E2	R424	*B3		
R68	*C1	R263	*E2	R425	*B3		
R69	*C1	R264	*D1	R426	*B2		
R70	*C1	R265	*D1	R427	*B1		
R71	*C1	R266	*D1	R451	*A1		
R72	*C1	R267	*C1	R452	*A1		
R73	*C1	R268	*C1	R453	*A2		
R74	*B1	R269	*D3	R454	*A2		
R75	*A1	R270	*D2	R455	*A2		
R76	*A1	R271	*C2	R456	*A2		
R77	*A1	R272	C2	R457	*A2		
R78	*B1	R273	C2	R458	*A2		
R79	*B1	R274	C2	R459	*A2		
R80	*B1	R275	C2	R460	*A2		
R81	*B1	R276	C2	R461	*A2		
R82	*B1	R277	C2	R462	*A2		
R83	*A1	R278	C2	R463	*A2		
R84	C1	R279	D3	R464	*A2		
R85	C1	R280	C3	R465	*A2		
R86	C1	R281	C3	R466	*A2		
R87	*A1	R282	C3	R467	*A2		
R88	*C1	R283	C3	R468	*A2		
R89	*C1	R284	C3	R469	*A3		
R90	*C1	R285	C3	R470	A3		
R91	*C1	R286	C3	R471	*A3		
R92	E2	R287	C2	R472	A3		
R93	E2	R291	C2	R473	*A2		
R94	E2	R292	C2	R474	*A2		
R95	E2	R301	C2	R475	*A3		
R96	E2	R302	*C2	R476	A3		
R97	E2	R303	C2	R477	*A3		
R201	*E1	R304	C2	R478	A3		
R202	*E1	R305	C2	R479	*A2		
R203	*E1	R306	C2	R480	*A2		
R204	*E1	R307	C2	R481	*A3		
R205	*E1	R308	C2	R482	*A3		
R206	*E1	R309	*C3	R484	*A3		
R207	*E1	R310	*C3	R486	*A3		
R208	*E1	R311	C2	R487	*A3		
R209	*D1	R312	C3	R488	*A3		
R210	*D1	R313	C3	R489	*A3		
R211	*D1	R314	C2	R490	*A2		
R212	*E2	R315	C3	R491	*A1		
R213	*D3	R316	C3	R492	*A3		
R214	*D2	R318	C3	R493	A3		

DAP-33 (1-865-932-13)

BT1	A1	C225	*D2	C404	*B1	D451	*A1
		C226	*D2	C405	*B1	D452	*A1
C1	E3	C227	*D2	C406	*B1	D453	*A2
C2	E3	C228	*D2	C407	*B1	D454	*A2
C3	*E3	C230	*D2	C408	*B2	D455	*A3
C4	E3	C231	*D2	C409	*B2		
C5	E3	C232	*D2	C410	B2	E1	B2
C6	E3	C234	*D2	C411	B2	E2	*B2
C7	E3	C235	*D2	C412	*B2		
C8	*E3	C236	*D2	C413	*A2	FB2	D2
C10	E3	C237	*D2	C414	*B2	FB3	D2
C11	*D1	C238	*D2	C415	*B2		
C12	*D1	C239	*D2	C416	B2	IC1	E3
C13	*D1	C241	*D2	C417	B2	IC2	A2
C21	*A3	C242	*D2	C418	*B2	IC3	A2
C22	*A3	C243	*D2	C419	*B2	IC4	D3
C23	*A3	C245	*D1	C420	*B2	IC11	*D1
C24	*A3	C246	*D1	C421	*A2	IC61	C1
C25	A3	C247	*D1	C422	B2	IC62	C1
C26	*A3	C248	*D1	C423	*B3	IC63	C1
C27	A3	C249	*E1	C424	*B2	IC64	C1
C28	*A2	C250	*D1	C425	*B3	IC75	E2
C29	*A2	C251	*D2	C426	*B3	IC81	*B1
C30	A2	C252	*D2	C427	B3	IC82	E2
C31	A3	C253	*D2	C428	B3	IC83	*E2
C32	*A2	C258	*D2	C429	*B3	IC84	*E2
C33	*A2	C271	*C2	C430	B2	IC201	D2
C34	A2	C272	*C2	C451	*A1	IC202	D1
C35	A2	C273	C2	C452	*A2	IC203	*C1
C36	A1	C274	C2	C453	*A1	IC205	*C2
C37	*A2	C275	*C2	C454	*A1	IC207	*D3
C38	A3	C276	*C2	C455	*A1	IC211	E1
C39	*B3	C277	C2	C456	*A1	IC212	E1
C41	*D3	C278	C2	C457	*A1	IC213	D1
C42	D3	C279	*C3	C458	*A2	IC214	E1
C43	D3	C280	*C2	C459	*A2	IC271	C2
C44	D3	C281	C2	C460	A2	IC272	C3
C45	D3	C282	C2	C461	A2	IC273	C3
C46	*D3	C283	C2	C462	A2	IC274	*C1
C47	*E3	C284	C2	C463	A2	IC275	*C1
C48	*D3	C285	D3	C464	*A2	IC276	*C2
C49	*D3	C286	C3	C465	*A2	IC301	C2
C50	E3	C287	*C3	C466	*A2	IC302	C3
C51	*D3	C288	*C3	C467	*A2	IC303	C3
C52	E3	C289	C1	C468	*A2	IC304	C3
C53	E2	C290	C1	C469	*A2	IC305	*C3
C54	E1	C291	C2	C470	*A2	IC306	*C3
C55	*E2	C301	C2	C471	*A2	IC351	*B1
C56	*E2	C302	*C2	C472	A2	IC352	B2
C58	*E1	C303	*C2	C473	*A2	IC353	B2
C59	E1	C304	C2	C474	A3	IC354	B2
C60	E2	C305	*C2	C475	A3	IC355	*B3
C61	*E2	C306	C2	C476	*A3	IC356	*B3
C62	*E2	C307	*C2	C477	*A3	IC401	*B1
C63	*E2	C308	C2			IC402	B2
C64	*E2	C309	C2	CL1	E3	IC403	B2
C65	*C1	C310	*C3	CL2	A2	IC404	B2
C66	*C1	C311	*C3	CL3	A2	IC405	*B2
C67	*C1	C312	*C3	CL4	E3	IC451	*A1
C68	*C1	C313	*C2	CL15	E2	IC452	*A3
C69	*C1	C314	C2	CL16	E2	IC453	A2
C70	*C1	C315	C2	CL17	E2	IC454	A2
C71	*C1	C316	C3	CL18	E2	IC455	A2
C72	*C1	C317	C3			IC456	A2
C74	B1	C318	C3	CN1	C3	IC457	*B2
C75	*B1	C319	C3	CN2	D1	IC458	*B2
C76	*C1	C320	C3				
C77	*C1	C321	*C3	D1	*E3	L1	E3
C201	*E1	C351	*B2	D2	*A3	L2	*B3
C202	*E1	C352	*B1	D3	A3	L3	*A3
C203	*D1	C353	*B1	D52	*B1	L4	A3
C204	*E1	C354	*B1	D53	*A1	L6	D3
C205	*E1	C355	*B1	D271	*C2	L7	*D3
C206	*E1	C356	*B1	D272	*C2	L8	*A2
C207	*E1	C357	*B1	D273	*C2	L9	A2
C208	*E1	C358	*B2	D274	*C2	L52	*E1
C209	*E1	C359	*B2	D275	*D3	L201	*E1
C210	*E1	C360	B2	D276	*C3	L202	*E1
C211	*E1	C361	B2	D277	*C3	L203	*D1
C212	*D1	C362	B2	D278	*C3	L204	*D1
C213	*E1	C363	B2	D301	*C2	L205	*D1
C214	*E1	C364	*B2	D302	*C2	L206	*D1
C215	*E1	C365	*B2	D303	*C3	L252	*C2
C216	*E1	C366	*B2	D304	*C3	L301	*C2
C217	*D2	C367	*B2	D351	*B1	L351	*B1
C218	*C1	C368	*B2	D352	*B1	L401	*A1
C219	*C1	C369	*B2	D353	*B2	L402	*B3
C220	*D1	C370	*B2	D354	*B2	L451	*A1
C221	*D1	C371	*B3	D401	*A1		
C222	*C1	C401	*B1	D402	*A1	Q1	*E3
C223	C1	C402	*B1	D403	*B2	Q2	*A3
C224	*D1	C403	*B2	D404	*B2	Q3	A3

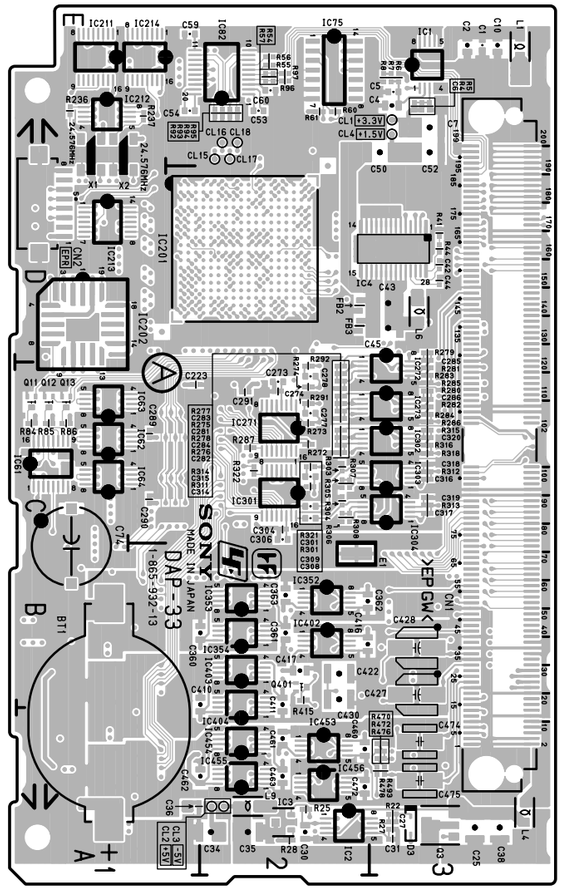

DAP-33 -A SIDE-
SUFFIX: -13

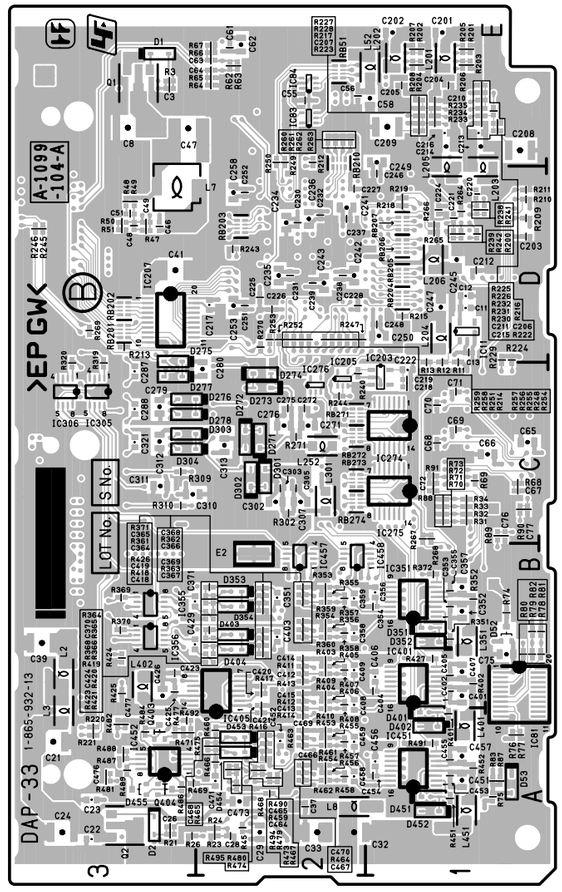


DAP-33 -B SIDE-
SUFFIX: -13

Q11	C1	R214	*D2	R318	C3	R493	A3
Q12	C1	R215	*D1	R319	*C3	R494	*A2
Q13	C1	R216	*E1	R320	*C3	R495	*A2
Q401	B2	R217	*E1	R321	C2		
Q403	*A3	R218	*D1	R322	C2	RB51	*E2
Q404	*A3	R219	*D1	R351	*B1	RB201	*D3
		R220	*A3	R352	*B1	RB202	*D3
R3	*E3	R221	*A3	R353	*B2	RB203	*D2
R4	E3	R222	*E1	R354	*B2	RB204	*D1
R5	E3	R223	*E1	R355	*B2	RB205	*D1
R6	E3	R224	*D1	R356	*B2	RB206	*D1
R7	E3	R225	*E1	R357	*B2	RB207	*D1
R8	E3	R226	*E1	R358	*B2	RB210	*E2
R11	*C1	R227	*E1	R359	*B2	RB271	*C2
R12	*C1	R228	*E1	R360	*B2	RB272	*C2
R13	*C1	R229	*D1	R361	*B2	RB273	*C2
R21	*A3	R230	*E1	R362	*B2	RB274	*C2
R22	A3	R231	*E1	R363	*B2		
R23	*A2	R232	*E1	R364	*B2	X1	E1
R24	*A2	R233	*E1	R365	*B2	X2	E1
R25	A2	R234	*E1	R366	*B2		
R26	*A3	R235	*E1	R368	*B2	*:B SIDE	
R27	A3	R236	E1	R369	*B3		
R28	A2	R237	E1	R370	*B3		
R31	*C1	R238	*D1	R371	*B2		
R32	*C1	R239	*D1	R372	*B1		
R33	*C1	R240	*C2	R401	*A1		
R34	*C1	R241	*D1	R402	*B1		
R41	D3	R242	*D1	R403	*B2		
R44	D3	R243	*D2	R404	*B2		
R45	*A2	R244	*C2	R405	*B2		
R47	*D3	R245	*D3	R406	*B2		
R48	*D3	R246	*D3	R407	*B2		
R49	*D3	R247	*D2	R408	*B2		
R50	*D3	R248	*D2	R409	*B2		
R51	*D3	R249	*E2	R410	*A2		
R54	E2	R250	*E2	R411	*B2		
R55	E2	R251	*D2	R412	*B2		
R56	E2	R252	*D2	R413	*B2		
R57	E2	R253	*D2	R414	*A2		
R60	E2	R254	*D2	R415	B2		
R61	E2	R255	*D2	R416	*B2		
R62	*E2	R256	*D2	R417	*B2		
R63	*E2	R257	*D2	R418	*B2		
R64	*E2	R258	*D2	R419	*B2		
R65	*E2	R259	*D2	R420	*B2		
R66	*E2	R260	*E2	R421	*B2		
R67	*E2	R261	*E2	R423	*B2		
R68	*C1	R262	*E2	R424	*B3		
R69	*C1	R263	*E2	R425	*B3		
R70	*C1	R264	*D1	R426	*B2		
R71	*C1	R265	*D1	R427	*B1		
R72	*C1	R266	*D1	R451	*A1		
R73	*C1	R267	*C1	R452	*A1		
R74	*B1	R268	*C1	R453	*A2		
R75	*A1	R269	*D3	R454	*A2		
R76	*A1	R270	*D2	R455	*A2		
R77	*A1	R271	*C2	R456	*A2		
R78	*B1	R272	C2	R457	*A2		
R79	*B1	R273	C2	R458	*A2		
R80	*B1	R274	C2	R459	*A2		
R81	*B1	R275	C2	R460	*A2		
R82	*B1	R276	C2	R461	*A2		
R83	*A1	R277	C2	R462	*A2		
R84	C1	R278	C2	R463	*A2		
R85	C1	R279	D3	R464	*A2		
R86	C1	R280	C3	R465	*A2		
R87	*A1	R281	C3	R466	*A2		
R88	*C1	R282	C3	R467	*A2		
R89	*C1	R283	C3	R468	*A2		
R90	*C1	R284	C3	R469	*A3		
R91	*C1	R285	C3	R470	A3		
R92	E2	R286	C3	R471	*A3		
R93	E2	R287	C2	R472	A3		
R94	E2	R291	C2	R473	*A2		
R95	E2	R292	C2	R474	*A2		
R96	E2	R301	C2	R475	*A3		
R97	E2	R302	*C2	R476	A3		
R200	*D1	R303	C2	R477	*A3		
R201	*E1	R304	C2	R478	A3		
R202	*E1	R305	C2	R479	*A2		
R203	*E1	R306	C2	R480	*A2		
R204	*E1	R307	C2	R481	*A3		
R205	*E1	R308	C2	R482	*A3		
R206	*E1	R309	*C3	R484	*A3		
R207	*E1	R310	*C3	R486	*A3		
R208	*E1	R311	C2	R487	*A3		
R209	*D1	R312	C3	R488	*A3		
R210	*D1	R313	C3	R489	*A3		
R211	*D1	R314	C2	R490	*A2		
R212	*E2	R315	C3	R491	*A1		
R213	*D3	R316	C3	R492	*A3		


DPR-265 (1-865-929-11)

C57	A4	C188	*F2	C280	*F4	C402	*B3	C530	A1	C742	*C4	C854	*D4	C954	*E2
C58	C4	C189	*F2	C281	*F2	C403	*B3	C531	*A2	C743	*D4	C855	*D3	C955	*C2
C59	F5	C190	F5	C282	*F3	C404	*B4	C532	B4	C744	*C4	C856	*D3	C956	*C2
C60	F5	C191	F5	C283	*F4	C405	*B3	C533	B4	C745	*C4	C857	*D3	C957	*C2
C61	A2	C192	F5	C284	*F2	C406	*B3	C534	*B1	C746	*C4	C858	*D3	C958	*C1
C101	*E2	C193	F5	C285	*F2	C407	*B3	C535	A2	C747	*C4	C865	*D3	C959	*C2
C102	*E5	C194	*E5	C286	*F3	C408	*B3	C536	A2	C748	*D4	C866	*D4	C960	*C2
C103	E5	C195	B5	C287	*F3	C409	*B3	C537	A2	C749	*D4	C867	*D4	C961	*C2
C104	E1	C196	B5	C288	*F4	C410	*B3	C538	A2	C752	*E3	C868	*D4	C962	*C2
C105	E1	C197	B5	C289	*F4	C411	*C3	C539	A2	C753	*D4	C869	*D3	C963	*C2
C106	E5	C198	B5	C290	*F2	C412	*C4	C540	A2	C754	*C3	C870	*D3	C964	*C2
C107	E1	C199	C4	C291	*F3	C413	*C3	C541	A2	C755	*C5	C871	*D4	C965	*C2
C108	*E5	C200	*B2	C292	*F4	C414	*C3	C542	A2	C756	*C5	C872	*D4	C966	*C2
C109	*C5	C201	*F1	C293	*F2	C415	*B3	C543	A2	C757	*D3	C873	*D3	C967	*E5
C110	*C5	C202	*F2	C294	*F3	C416	*B4	C544	A2	C758	*D4	C874	*D4	C968	*D4
C111	*C5	C203	*F4	C295	*F4	C417	*B4	C545	A2	C759	*D3	C875	*D4	C969	*E5
C112	*E5	C204	*F2	C296	*F2	C418	*B3	C546	A2	C760	*D3	C876	*D4	C970	*D4
C113	*C5	C205	*F3	C297	*F2	C419	*B4	C547	*F4	C761	*D4	C877	*D4	C971	E5
C114	*E1	C206	*F4	C298	*F3	C420	*B3	C548	*F4	C762	*E3	C878	*D4	C972	*D5
C115	*F1	C207	*F2	C299	*F3	C421	*B3	C601	A4	C763	*D3	C879	*D3	C973	E5
C116	*E1	C208	*F1	C300	*F4	C422	*B3	C602	*A4	C764	*C3	C880	*D3	C974	*D5
C117	*E1	C209	*F3	C301	*F4	C423	*B3	C603	A4	C765	*C3	C881	*D4	C975	D5
C118	F5	C210	*F2	C302	F2	C424	*B3	C604	A4	C766	*D3	C882	*D4	C976	*E5
C119	C4	C211	*F4	C303	F2	C425	*B3	C605	A4	C767	*D3	C883	*D4	C977	E5
C120	E1	C212	*F4	C304	F3	C426	*B4	C606	*A4	C768	*D4	C884	*D4	C978	*D5
C121	*B5	C213	*F2	C305	F3	C427	*B3	C607	A4	C769	*E4	C885	*D4	C979	E5
C122	*C5	C214	*F3	C306	F4	C428	*B3	C608	*A4	C770	*D4	C886	*D3	C980	*D5
C123	*B5	C215	*F4	C307	F4	C429	*B3	C609	A4	C771	*D4	C887	*D3	C981	E5
C124	*B5	C216	*F2	C308	F2	C430	*B3	C610	A4	C772	*D4	C888	*D3	C982	*D5
C125	*C5	C217	*F3	C309	F3	C431	*B3	C611	A4	C773	*D4	C889	*D3	C983	E4
C126	*B5	C218	*F4	C310	F4	C432	*B3	C612	*A4	C774	D4	C890	*D3	C984	*D4
C127	*B5	C219	*F2	C311	F2	C433	*B3	C613	*A3	C775	*E4	C891	*D4	C985	E4
C128	*C5	C220	*F1	C312	F3	C434	*C3	C614	*A3	C776	*E4	C892	*D4	C986	*D4
C129	*A5	C221	*F3	C313	F4	C435	*B3	C615	A3	C777	*E4	C895	*B1	C987	E5
C130	*B5	C222	*F2	C314	F2	C436	*B4	C616	A3	C778	*E4	C896	*B1	C988	*D5
C131	F1	C223	*F4	C315	F3	C437	*B4	C617	A3	C788	*C4	C897	*B1	C989	C4
C132	F5	C224	*F4	C316	F4	C438	*B4	C618	A3	C789	*D3	C898	*E5	C990	C4
C133	F5	C225	F1	C317	F2	C439	*C4	C619	A3	C790	*D4	C899	*B1	C991	D5
C134	F5	C226	F1	C318	F3	C440	*B3	C620	A3	C791	*D3	C900	*B1	C992	C5
C135	E1	C227	F2	C319	F4	C441	*B4	C621	A3	C792	*D3	C901	D2	C993	C5
C136	*E1	C228	F2	C320	F2	C442	*C4	C622	A3	C793	*D4	C902	C2	C994	D5
C137	*E1	C229	F4	C321	F2	C443	*B3	C623	A3	C794	*E3	C903	D2	C995	D5
C138	*B5	C230	F4	C322	F3	C444	*B3	C624	*A3	C795	*D3	C904	C2	C996	C5
C139	*A5	C231	F1	C323	F3	C445	*B3	C625	A5	C796	*C3	C905	E1	C997	*C5
C140	*F5	C232	F3	C324	F4	C446	*B4	C626	A3	C797	*C3	C906	D1	C998	*C5
C141	*F1	C233	F4	C325	F4	C447	*B4	C627	A3	C798	*D3	C907	E2	C999	C4
C142	*E5	C234	F2	C326	F2	C448	B1	C628	*A4	C799	*D3	C908	D2		
C143	*B5	C235	F3	C327	F3	C449	*B1	C629	A2	C800	*D4	C909	E2	CL27	C4
C144	*A5	C236	F4	C328	F4	C450	B1	C630	A2	C801	*E4	C910	D2	CL28	C4
C145	*B4	C237	F1	C329	F2	C451	B2	C631	A5	C802	*D4	C911	E2	CL29	C4
C146	*B5	C238	F3	C330	F2	C452	B2	C632	A5	C803	*D4	C912	D2	CL30	C4
C147	*B5	C239	F4	C331	F3	C453	*B2	C633	*A5	C804	*D4	C913	E2	CL31	C4
C148	*A4	C240	F1	C332	F3	C454	*B1	C634	*A4	C805	*D4	C914	D2	CL32	C4
C149	*A5	C241	F2	C333	F4	C455	*B2	C701	*C4	C806	D4	C915	E2	CL33	C4
C150	*A5	C242	F4	C334	F4	C456	*B3	C702	*C4	C807	*E4	C916	D2	CL34	C4
C151	*E1	C243	F1	C335	F2	C457	*B3	C703	*D4	C808	*E4	C917	D2	CL35	E3
C152	*F1	C244	F2	C336	F2	C458	*B3	C704	*E3	C809	*E4	C918	C2	CL36	*E4
C153	*B4	C245	F2	C337	F3	C459	*B3	C705	*E4	C810	*E4	C919	D2	CL101	E5
C154	*B5	C246	F3	C338	F3	C460	*A3	C706	*D3	C820	*D3	C920	C2	CL102	E1
C155	*A5	C247	F4	C339	F4	C461	*B3	C707	*E3	C821	*D4	C921	E2	CL103	E1
C156	*A5	C248	F4	C340	F4	C462	*B3	C708	*E3	C822	*D4	C922	D2	CL104	B5
C157	*F5	C249	F2	C341	F2	C463	*B3	C709	*E4	C823	*D3	C923	C2	CL105	A4
C158	*E5	C250	F3	C342	F4	C464	*C4	C710	*E4	C824	*D3	C924	C2	CL201	F1
C159	F1	C251	F4	C343	F4	C501	*A1	C711	*E4	C825	*D3	C925	C2	CL202	F2
C160	F1	C252	F2	C344	F2	C502	*A2	C712	*D3	C826	*D3	C926	C2	CL203	F4
C161	*A5	C253	F2	C345	F3	C503	*A1	C713	*D4	C827	*D3	C927	C1	CL204	F2
C162	*B4	C254	F3	C346	F4	C504	*A2	C714	*D4	C828	*D3	C928	C2	CL205	F3
C163	*A5	C255	F3	C347	E2	C505	*A1	C715	*C3	C829	*D4	C929	C2	CL206	F4
C164	*B4	C256	F4	C348	E4	C506	*A2	C716	*C4	C830	*C4	C930	C2	CL401	C4
C165	B4	C257	F4	C349	E4	C507	*A2	C717	*C4	C831	*C4	C931	C2	CL402	C4
C166	B4	C258	F1	C350	F2	C508	*A1	C718	*D4	C832	*C4	C932	C2	CL403	C3
C167	*F5	C259	F2	C351	E4	C509	*A2	C719	*C4	C833	*C4	C933	C2	CL404	C3
C168	*D1	C260	F2	C352	E4	C510	*A1	C720	*C4	C834	*D3	C934	*D2	CL601	A5
C169	*E1	C261	F3	C353	E4	C511	*A2	C721	*D4	C835	*D3	C935	*D2		
C170	*E1	C262	F4	C354	E4	C512	*A1	C722	*C4	C836	*D4	C936	*D2	CN101	*E3
C171	*F5	C263	F4	C355	*F1	C513	*A1	C723	*D4	C837	*D3	C937	*D2	CN201	D1
C172	*F2	C264	F2	C356	*F1	C514	*A1	C724	*D4	C838	*D3	C938	*E2	CN601	A2
C173	*A2	C265	F3	C357	*F1	C515	*A2	C727	*C5	C839	*D3	C939	*C1		
C174	*B1	C266	F3	C358	*F3	C516	*A1	C728	*D4	C840	*D3	C940	*E2	D11	C3
C175	*C4	C267	F2	C359	*F4	C517	*A2	C729	*E3	C841	*D3	C941	*C2	D102	E1
C176	*B1	C268	F3	C360	*F2	C518	*A1	C730	*E4	C842	*D3	C942	*E1	D103	E1
C177	*F4	C269	F4	C361	*F3	C519	A1	C731	*D3	C843	*D4	C943	*C2	D104	E1
C178	*F3	C270	E1	C362	*F4	C520	A1	C732	*E3	C844	*D4	C944	*E2	D501	*A1
C179	*F2	C271	E3	C371	*B1	C521	A1	C733	*E3	C845	*D4	C945	*C2	D502	*A2
C180	*F3	C272	E3	C372	*C1	C522	A1	C734	*E4	C846	*D4	C946	*E2	D504	A1
C181	*F2	C273	F1	C373	*C1	C523	A1	C735	*E4	C847	*D4	C947	*C2	D505	A1
C182	*F1	C274	F3	C374	*C1	C524	A1	C736	*E4	C848	*D4	C948	*E2	D506	A1
C183	C1	C275	E3	C375	*D1	C525	A1	C737	*D3	C849	*D4	C949	*C2	D507	*A2
C184	*C1	C276	E2	C376	*D1	C526	A1	C738	*D4	C850	*D4	C950	*D2		
C185	*E1	C277	E2	C377	*E4	C527	*A2	C739	*D4	C851	*D4	C951	*D2	E1	F1
C186	*E1	C278	*F2	C399	E4	C528	A2	C740	*C3	C852	*D4	C952	*D2	E2	B1
C187	*E1	C279	*F3	C401	*B3	C529	A2	C741	*C4	C853	*D4	C953	*D2		

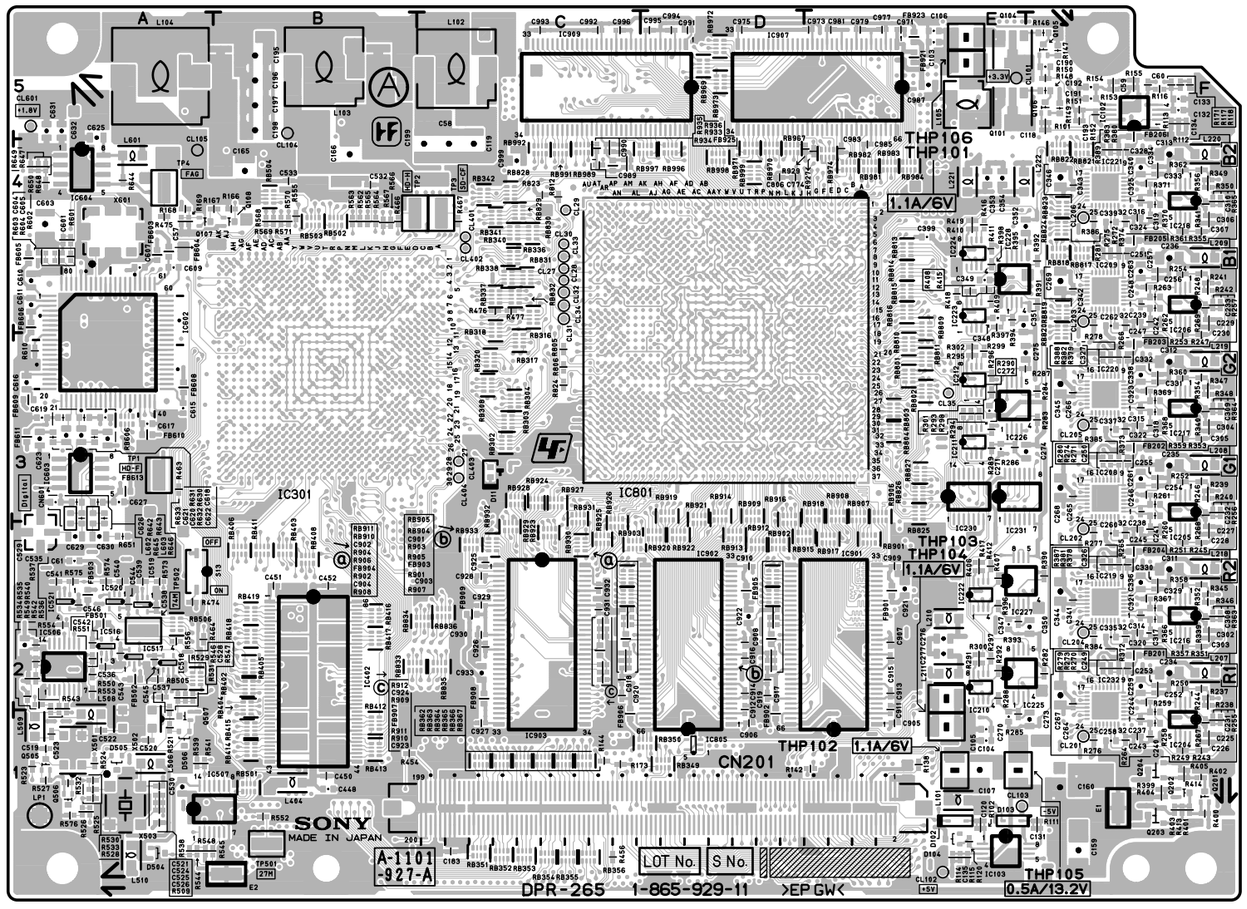

DPR-265 -A SIDE-
SUFFIX: -11

FB101	*C5	FB609	A3	FB921	E5	IC201	*F2	IC227	E2	IC511	*A2	IC904	*E2	L209	F4	L505	*A2	Q105	F5
FB102	*B5	FB610	A3	FB922	*E5	IC202	*F3	IC228	E4	IC512	*A1	IC905	*D2	L210	E2	L506	A1	Q106	F5
FB103	*C5	FB611	A3	FB923	E5	IC203	*F4	IC230	E3	IC513	*A1	IC906	*C2	L211	E2	L507	*A2	Q107	A4
FB104	*B5	FB612	*A3	FB924	*D5	IC204	F1	IC231	E3	IC514	*A2	IC907	E5	L212	*F2	L508	A1	Q108	B4
FB105	*F5	FB613	A3	FB925	C4	IC205	F3	IC232	F2	IC515	*A2	IC908	*D5	L213	*F3	L509	A1	Q201	F1
FB106	*E5	FB901	E2	FB926	*C5	IC206	F4	IC301	B3	IC516	A2	IC909	C5	L214	*F4	L510	A1	Q202	F1
FB107	*E5	FB902	D1	FB927	*C5	IC208	F3	IC302	*C1	IC517	A2			L215	*F2	L511	*A2	Q203	F1
FB108	*E5	FB903	D2			IC209	F4	IC303	*C1	IC518	A2	L101	E1	L216	*F3	L512	*B1	Q204	F1
FB201	F2	FB904	C2	FL201	*F1	IC210	E2	IC304	*C1	IC519	A2	L102	C5	L217	*F4	L601	A4	Q501	*A2
FB202	F3	FB905	D2	FL202	*F3	IC211	E3	IC305	*C1	IC520	A2	L103	B5	L218	F2	L602	A3	Q502	*B1
FB203	F3	FB906	C1	FL203	*F4	IC212	E3	IC306	*D1	IC521	A2	L104	A5	L219	F3	L603	A3	Q503	*A1
FB204	F2	FB907	C2	FL204	*F2	IC213	*F2	IC307	*D1	IC522	*E4	L105	E5	L220	F4	L801	*C5	Q504	*A2
FB205	F4	FB908	C2	FL205	*F3	IC214	*F3	IC308	*E4	IC523	*E4	L107	*E1	L221	E4	L802	*C4	Q505	A1
FB206	F5	FB909	C2	FL206	*F4	IC215	*F4	IC310	*A3	IC601	*A4	L108	*F1	L222	E4	L803	*C4	Q506	A1
FB501	A2	FB910	*D2			IC216	F2	IC402	B2	IC602	A3	L109	*E1	L401	*A4	L804	*C4	Q507	A1
FB502	A2	FB911	*D2	IC101	*E1	IC217	F3	IC403	*B2	IC603	A3	L111	*F5	L402	*A4	L805	*C4	Q601	*A4
FB503	A2	FB912	*E2	IC102	F5	IC218	F4	IC501	*A1	IC604	A4	L112	*F5	L403	*B4	L806	*B1	Q602	*A5
FB601	*A4	FB913	*C2	IC103	E1	IC219	F2	IC502	*A2	IC801	D3	L201	*F1	L404	B1			Q603	*A4
FB602	*A4	FB914	*D2	IC104	*B5	IC220	F3	IC503	*A1	IC802	*B1	L202	*F2	L405	*B1	LP1	A1	Q604	*A4
FB603	A4	FB915	*D1	IC105	*B5	IC221	F4	IC504	*A2	IC803	*E4	L203	*F3	L406	*A3				
FB604	A4	FB916	*C2	IC106	*B4	IC222	E2	IC505	*A1	IC804	*D1	L204	*F2	L407	*C4	Q11	*C3	R101	F5
FB605	A4	FB917	*C2	IC107	*E1	IC223	E4	IC506	A2	IC805	D1	L205	*F3	L501	*A1	Q101	E5	R102	E1
FB606	A4	FB918	*C2	IC108	*E1	IC224	E4	IC507	B1	IC901	E2	L206	*F4	L502	*A2	Q102	*E1	R103	*B5
FB607	*A4	FB919	*E5	IC110	*E3	IC225	E2	IC509	*B4	IC902	D2	L207	F2	L503	*A1	Q103	*E1	R104	*B5
FB608	A3	FB920	*D4	IC111	*C2	IC226	E3	IC510	*B4	IC903	C2	L208	F3	L504	*A2	Q104	E5	R105	*B5

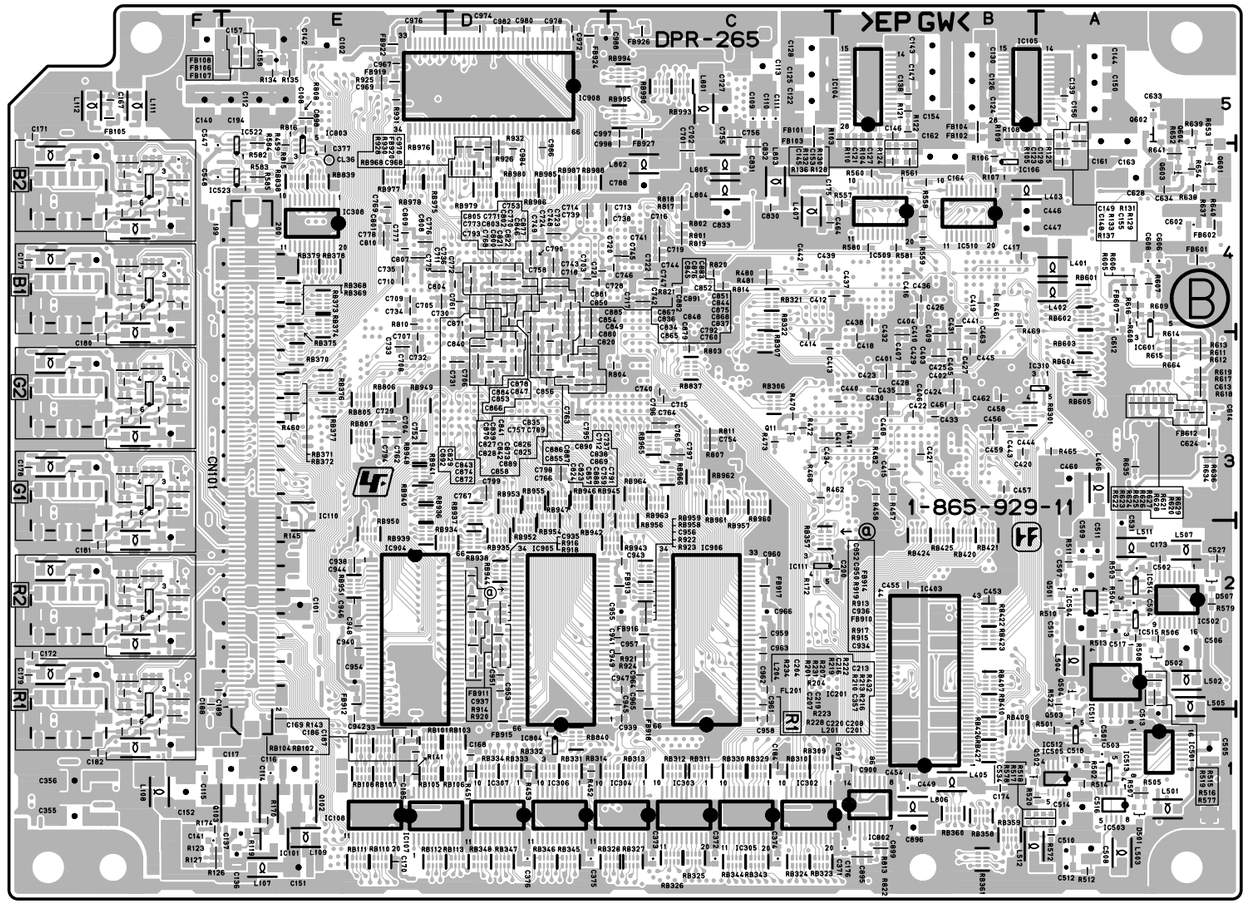

DPR-265 -B SIDE-


SUFFIX: -11

R106	*B4	R131	*A5	R168	A4	R219	*F2	R244	F2	R269	F4	R294	E3	R322	*F3	R347	F3	R372	F2
R107	*B4	R132	*B4	R169	A4	R220	*F3	R245	F2	R270	F2	R295	E3	R323	*F4	R348	F3	R373	F3
R108	*B5	R133	*A4	R170	*E1	R221	*F4	R246	F3	R271	F3	R296	E3	R324	*F2	R349	F4	R374	F4
R109	*B5	R134	*E5	R171	F5	R222	*F2	R247	F3	R272	F4	R297	E2	R325	*F3	R350	F4	R378	F2
R110	*B5	R135	*E5	R172	*C2	R223	*F1	R248	F4	R273	F2	R298	E3	R326	*F4	R351	F2	R379	F3
R111	F1	R136	*B4	R173	C1	R224	*F3	R249	F1	R274	F3	R299	E3	R327	*F2	R352	F2	R380	F4
R112	F5	R137	*A4	R174	*F1	R225	*F3	R250	F2	R275	F4	R300	E2	R328	*F3	R353	F3	R381	F2
R113	F5	R138	E1	R201	*F2	R226	*F4	R251	F2	R276	F1	R301	E3	R329	*F4	R354	F3	R382	F3
R114	E1	R141	*E1	R202	*F3	R227	*F4	R252	F3	R277	F2	R302	E3	R330	*F2	R355	F4	R383	F4
R115	E1	R142	E1	R203	*F4	R228	*F1	R253	F3	R278	F4	R303	*F2	R331	*F2	R356	F4	R384	F2
R116	F5	R143	*E1	R204	*F2	R229	*F2	R254	F4	R279	F2	R304	*F3	R332	*F3	R357	F2	R385	F3
R117	F5	R144	C1	R205	*F3	R230	*F4	R255	F1	R280	F3	R305	*F4	R333	*F3	R358	F2	R386	F4
R118	F5	R145	*E3	R206	*F4	R231	*F2	R256	F3	R281	F4	R309	*F2	R334	*F4	R359	F3	R387	F2
R119	*E1	R146	F5	R207	*F2	R232	*F3	R257	F4	R282	F2	R310	*F3	R335	*F4	R360	F3	R388	F3
R120	E1	R147	F5	R208	*F3	R233	*F4	R258	F1	R283	F3	R311	*F4	R336	*F2	R361	F4	R389	F4
R121	*B5	R148	F5	R209	*F4	R234	*F2	R259	F1	R284	F3	R312	*F2	R337	*F3	R362	F4	R390	F2
R122	*B5	R149	F5	R210	*F2	R235	*F3	R260	F3	R285	E1	R313	*F3	R338	*F4	R363	F2	R391	F4
R123	*F1	R150	F5	R211	*F3	R236	*F4	R261	F3	R286	E3	R314	*F4	R339	F2	R364	F3	R392	F4
R124	*B5	R151	F5	R212	*F4	R237	F2	R262	F4	R287	E3	R315	*F2	R340	F3	R365	F4	R393	E2
R125	*A5	R152	F5	R213	*F2	R238	F2	R263	F4	R288	E2	R316	*F3	R341	F4	R366	F2	R394	E4
R126	*F1	R153	F5	R214	*F3	R239	F3	R264	F1	R289	E3	R317	*F4	R342	*F2	R367	F2	R395	E4
R127	*F1	R154	F5	R215	*F4	R240	F3	R265	F2	R290	E3	R318	*F2	R343	*F3	R368	F3	R396	E2
R128	*B4	R155	F5	R216	*F1	R241	F4	R266	F4	R291	E2	R319	*F3	R344	*F4	R369	F3	R397	E4
R129	*A5	R166	B4	R217	*F3	R242	F4	R267	F1	R292	E2	R320	*F4	R345	F2	R370	F4	R398	E4
R130	*B4	R167	B4	R218	*F4	R243	F1	R268	F3	R293	E3	R321	*F2	R346	F2	R371	F4	R399	F1

R400	F1	R538	A1	R645	A3	RB311	*C1	RB502	B4	RB944	*D2								
R401	F1	R539	A1	R646	A3	RB312	*C1	RB503	B4	RB945	*D3								
R402	F1	R540	A2	R647	A4	RB313	*C1	RB504	B4	RB946	*D3								
R403	F1	R541	A1	R648	A4	RB314	*C1	RB505	A2	RB947	*D3								
R404	F1	R542	A2	R649	A4	RB316	C4	RB506	A2	RB948	*E3								
R405	F1	R543	A2	R650	A4	RB317	C3	RB601	*A4	RB949	*E3								
R406	E2	R544	A1	R651	A2	RB318	C4	RB602	*A4	RB950	*E2								
R407	E2	R545	A1	R652	*A4	RB320	C3	RB603	*A3	RB951	*E2								
R408	E4	R546	A2	R653	*A4	RB321	*C4	RB604	*A3	RB952	*D2								
R409	E4	R547	A2	R654	*A4	RB322	*C4	RB605	*A3	RB953	*D3								
R410	E4	R548	A1	R664	*A3	RB323	*C1	RB606	A3	RB954	*D3								
R411	E4	R549	A2	R801	*C4	RB324	*C1	RB801	E3	RB955	*D3								
R412	E2	R550	A2	R802	*C4	RB325	*C1	RB802	E3	RB956	*C3								
R413	F1	R551	A2	R803	*C3	RB326	*C1	RB803	E3	RB957	*C3								
R414	F1	R552	B1	R804	*C3	RB327	*C1	RB804	E3	RB958	*C2								
R415	E4	R553	A2	R805	C3	RB328	*C1	RB805	*E3	RB959	*C2								
R416	E4	R554	A2	R806	C3	RB329	*C1	RB806	*E3	RB960	*C3								
R417	E2	R555	B4	R807	*C3	RB330	*C1	RB807	*E3	RB961	*C3								
R418	E4	R556	A2	R808	*E5	RB331	*D1	RB809	E4	RB962	*C3								
R419	E4	R557	*B4	R810	*E4	RB332	*D1	RB810	E3	RB963	*C3								
R432	*F2	R558	*B4	R811	*C3	RB333	*D1	RB811	E3	RB964	*C3								
R433	*F3	R559	*B4	R812	C4	RB334	*D1	RB813	E4	RB965	*C3								
R434	*F4	R560	*B4	R813	*B1	RB336	C4	RB814	E4	RB966	*C3								
R435	*F2	R561	*B4	R814	*C4	RB337	C4	RB815	E4	RB967	D4								
R436	*F3	R562	B4	R815	*E4	RB338	C4	RB816	E4	RB968	*D4								
R437	*F4	R563	B4	R816	*E5	RB340	C4	RB817	F4	RB969	D5								
R451	*D1	R564	B4	R817	*C4	RB341	C4	RB818	F4	RB970	D4								
R452	*D1	R565	B4	R818	*C4	RB342	C4	RB819	F4	RB971	D4								
R453	*D1	R566	B4	R819	*C4	RB343	*C1	RB820	F4	RB972	D5								
R454	B1	R567	B4	R820	*C4	RB344	*C1	RB821	F4	RB973	D5								
R456	C1	R568	B4	R821	*C4	RB345	*D1	RB822	F4	RB974	E4								
R457	*B3	R569	B4	R822	*B1	RB346	*D1	RB823	F4	RB975	*E4								
R458	*B3	R570	B4	R823	C4	RB347	*D1	RB824	F4	RB976	*E4								
R459	*E4	R571	B4	R824	C3	RB348	*D1	RB825	E3	RB977	*E4								
R460	*E3	R572	*A1	R901	D2	RB349	D1	RB826	E3	RB978	*E4								
R461	*B4	R573	A2	R902	C2	RB350	D1	RB827	E3	RB979	*D4								
R462	*C3	R574	A2	R903	D2	RB351	C1	RB828	C4	RB980	*D4								
R463	A3	R575	A2	R904	C2	RB352	C1	RB829	C4	RB981	E4								
R464	A2	R576	A1	R905	D2	RB353	C1	RB830	C4	RB982	E4								
R465	*A3	R577	*A2	R906	C2	RB354	C1	RB831	C4	RB983	E4								
R466	B4	R578	*B1	R907	D2	RB355	C1	RB832	C4	RB984	E4								
R467	C4	R579	*A2	R908	C2	RB356	C1	RB833	B2	RB985	*D4								
R468	*C3	R580	*B4	R909	C2	RB357	*C2	RB834	C2	RB986	*D4								
R469	*B4	R581	*B4	R910	C2	RB358	*B1	RB835	C2	RB987	*D4								
R470	*C3	R582	*E5	R911	C2	RB359	*B1	RB836	C2	RB988	*D4								
R471	*B3	R583	*E4	R912	C2	RB360	*B1	RB837	*C3	RB989	C4								
R472	*C3	R584	*E5	R913	*D2	RB361	*B1	RB838	*E4	RB990	*C5								
R473	*C3	R585	*E4	R914	*D2	RB362	C1	RB839	*E4	RB991	C4								
R474	A2	R601	A4	R915	*D2	RB363	C1	RB840	*D1	RB992	C4								
R475	A4	R602	A4	R916	*D2	RB364	C1	RB901	E2	RB993	*C5								
R476	C4	R603	A4	R917	*D2	RB365	C1	RB902	D2	RB994	*C5								
R477	C4	R604	A4	R918	*D2	RB366	C1	RB903	C2	RB995	*C5								
R480	*C4	R605	*A4	R919	*D2	RB367	C1	RB904	D2	RB996	D4								
R481	*C4	R606	*A4	R920	*D2	RB368	*E4	RB905	D2	RB997	D4								
R482	*B3	R607	*A4	R921	*C2	RB369	*E4	RB906	E3	RB998	D4								
R501	*A1	R608	*A4	R922	*C2	RB370	*E3	RB907	E3	RB999	D4								
R502	*A1	R609	*A4	R923	*C2	RB371	*E3	RB908	E3										
R503	*A2	R610	A3	R924	*C2	RB372	*E3	RB909	D3	S13	A2								
R504	*A2	R611	*A3	R925	*E5	RB373	*E4	RB910	C2										
R505	*A1	R612	*A3	R926	*D4	RB374	*E4	RB911	C2	THP101	E5								
R506	*A2	R613	*A3	R927	E4	RB375	*E3	RB912	D2	THP102	E1								
R507	*A1	R614	*A3	R928	*D4	RB376	*E3	RB913	D2	THP103	E2								
R508	*A2	R615	*A3	R929	E4	RB377	*E3	RB914	D3	THP104	E1								
R509	A1	R616	*A4	R930	*D4	RB378	*E4	RB915	D2	THP105	E1								
R510	*A2	R617	*A3	R931	*E5	RB379	*E4	RB916	D3	THP106	E5								
R511	*A2	R618	*A3	R932	*D5	RB402	B2	RB917	E2										
R512	*A1	R619	*A3	R933	C4	RB403	B2	RB918	E3	TP1	A3								
R513	*A2	R620	*A3	R934	C4	RB404	B2	RB919	D3	TP2	B4								
R514	*A1	R621	*A3	R935	C4	RB405	B2	RB920	D2	TP3	C4								
R515	*A2	R622	*A3	R936	C4	RB406	B2	RB921	D3	TP4	A4								
R516	*A2	R623	*A3			RB407	*B2	RB922	D2	TP501	B1								
R517	*A1	R624	*A3	RB101	*E1	RB408	B2	RB923	C2	TP502	A2								
R518	*A1	R625	*A3	RB102	*E1	RB409	*B1	RB924	C3										
R519	*A2	R626	*A3	RB103	*D1	RB410	*B2	RB925	C2	X501	A1								
R520	*A1	R627	*A3	RB104	*E1	RB411	B2	RB926	C2	X502	A1								
R521	A1	R628	*A3	RB105	*E1	RB412	B1	RB927	C3	X503	A1								
R522	*A2	R629	*A3	RB106	*D1	RB413	B1	RB928	C3	X601	A4								
R523	A1	R630	A3	RB107	*E1	RB414	B1	RB929	C2										
R524	A1	R631	A3	RB108	*E1	RB415	B1	RB930	C2	*:B SIDE									
R525	A1	R632	A3	RB110	*E1	RB416	B2	RB931	C3										
R526	A1	R633	A3	RB111	*E1	RB417	B2	RB932	C2										
R527	A1	R634	*A3	RB112	*E1	RB418	B2	RB933	C2										
R528	A1	R635	*A3	RB113	*D1	RB419	B2	RB934	*D2										
R529	A2	R636	*A3	RB301	*B3	RB420	*B2	RB935	*D2										
R530	A1	R637	*A4	RB302	C3	RB421	*B2	RB936	*E3										
R531	A1	R638	*A4	RB303	C3	RB422	*B2	RB937	*D3										
R532	A1	R639	*A5	RB304	C3	RB423	*B2	RB938	*D2										
R533	A1	R640	*A4	RB306	*C3	RB424	*B2	RB939	*E2										
R534	A2	R641	*A4	RB307	*C3	RB425	*B2	RB940	*E3										
R535	A2	R642	A3	RB308	C3	RB426	*B1	RB941	*E3										
R536	A2	R643	A3	RB309	*C1	RB427	*B1	RB942	*D3										
R537	A2	R644	A4	RB310	*C1	RB501	B1	RB943	*C2										


DPR-265 (1-865-929-13,14)

C11	*B5	C186	*E1	C278	*F2	C399	E4	C528	A2	C740	*C3	C852	*D4	C952	*D2
C12	*A5	C187	*E1	C279	*F3	C401	*B3	C529	A2	C741	*C4	C853	*D4	C953	*D2
C57	A4	C188	*F2	C280	*F4	C402	*B3	C530	A1	C742	*C4	C854	*D4	C954	*E2
C58	C4	C189	*F2	C281	*F2	C403	*B3	C531	*A2	C743	*D4	C855	*D3	C955	*C2
C59	F5	C190	F5	C282	*F3	C404	*B4	C532	B4	C744	*C4	C856	*D3	C956	*C2
C60	F5	C191	F5	C283	*F4	C405	*B3	C533	B4	C745	*C4	C857	*D3	C957	*C2
C61	A2	C192	F5	C284	*F2	C406	*B3	C534	*B1	C746	*C4	C858	*D3	C958	*C1
C101	*E2	C193	F5	C285	*F2	C407	*B3	C535	A2	C747	*C4	C865	*D3	C959	*C2
C102	*E5	C194	*F5	C286	*F3	C408	*B3	C536	A2	C748	*D4	C866	*D4	C960	*C2
C103	E5	C195	B5	C287	*F3	C409	*B3	C537	A2	C749	*D4	C867	*D4	C961	*C2
C104	E1	C196	B5	C288	*F4	C410	*B3	C538	A2	C752	*E3	C868	*D4	C962	*C2
C105	E1	C197	B5	C289	*F4	C411	*C3	C539	A2	C753	*D4	C869	*D3	C963	*C2
C106	E5	C198	B5	C290	*F2	C412	*C4	C540	A2	C754	*C3	C870	*D3	C964	*C2
C107	E1	C199	C4	C291	*F3	C413	*C3	C541	A2	C755	*C5	C871	*D4	C965	*C2
C108	*E5	C200	*B2	C292	*F4	C414	*C3	C542	A2	C756	*C5	C872	*D4	C966	*C2
C109	*C5	C201	*F1	C293	*F2	C415	*B3	C543	A2	C757	*D3	C873	*D3	C967	*E5
C110	*C5	C202	*F2	C294	*F3	C416	*B4	C544	A2	C758	*D4	C874	*D4	C968	*D4
C111	*C5	C203	*F4	C295	*F4	C417	*B4	C545	A2	C759	*D3	C875	*D4	C969	*E5
C112	*E5	C204	*F2	C296	*F2	C418	*B3	C546	A2	C760	*D3	C876	*D4	C970	*D4
C113	*C5	C205	*F3	C297	*F2	C419	*B4	C547	*F4	C761	*D4	C877	*D4	C971	E5
C114	*E1	C206	*F4	C298	*F3	C420	*B3	C548	*F4	C762	*E3	C878	*D4	C972	*D5
C115	*F1	C207	*F1	C299	*F3	C421	*B3	C601	A4	C763	*D3	C879	*D3	C973	E5
C116	*E1	C208	*F1	C300	*F4	C422	*B3	C602	*A4	C764	*C3	C880	*D3	C974	*D5
C117	*E1	C209	*F3	C301	*F4	C423	*B3	C603	A4	C765	*C3	C881	*D4	C975	D5
C118	F5	C210	*F2	C302	F2	C424	*B3	C604	A4	C766	*D3	C882	*D4	C976	*E5
C119	C4	C211	*F4	C303	F2	C425	*B3	C605	A4	C767	*D3	C883	*D4	C977	E5
C120	E1	C212	*F4	C304	F3	C426	*B4	C606	*A4	C768	*D4	C884	*D4	C978	*D5
C121	*B5	C213	*F2	C305	F3	C427	*B3	C607	A4	C769	*E4	C885	*D4	C979	E5
C122	*C5	C214	*F3	C306	F4	C428	*B3	C608	*A4	C770	*D4	C886	*D3	C980	*D5
C123	*B5	C215	*F4	C307	F4	C429	*B3	C609	A4	C771	*D4	C887	*D3	C981	E5
C124	*B5	C216	*F2	C308	F2	C430	*B3	C610	A4	C772	*D4	C888	*D3	C982	*D5
C125	*C5	C217	*F3	C309	F3	C431	*B3	C611	A4	C773	*D4	C889	*D3	C983	E4
C126	*B5	C218	*F4	C310	F4	C432	*B3	C612	*A4	C774	D4	C890	*D3	C984	*D4
C127	*B5	C219	*F1	C311	F2	C433	*B3	C613	*A3	C775	*E4	C891	*D4	C985	E4
C128	*C5	C220	*F1	C312	F3	C434	*C3	C614	*A3	C776	*E4	C892	*D4	C986	*D4
C129	*A5	C221	*F3	C313	F4	C435	*B3	C615	A3	C777	*E4	C895	*B1	C987	E5
C130	*B5	C222	*F2	C314	F2	C436	*B4	C616	A3	C778	*E4	C896	*B1	C988	*D5
C131	F1	C223	*F4	C315	F3	C437	*B4	C617	A3	C788	*C4	C897	*B1	C989	C4
C132	F5	C224	*F4	C316	F4	C438	*B4	C618	A3	C789	*D3	C898	*E5	C990	C4
C133	F5	C225	F1	C317	F2	C439	*C4	C619	A3	C790	*D4	C899	*B1	C991	D5
C134	F5	C226	F1	C318	F3	C440	*B3	C620	A3	C791	*D3	C900	*B1	C992	C5
C135	E1	C227	F2	C319	F4	C441	*B4	C621	A3	C792	*D3	C901	D2	C993	C5
C136	*E1	C228	F2	C320	F2	C442	*C4	C622	A3	C793	*D4	C902	C2	C994	D5
C137	*E1	C229	F4	C321	F2	C443	*B3	C623	A3	C794	*E3	C903	D2	C995	D5
C138	*B5	C230	F4	C322	F3	C444	*B3	C624	*A3	C795	*D3	C904	C2	C996	C5
C139	*A5	C231	F1	C323	F3	C445	*B3	C625	A5	C796	*C3	C905	E1	C997	*C5
C140	*F5	C232	F3	C324	F4	C446	*B4	C626	A3	C797	*C3	C906	D1	C998	*C4
C141	*F1	C233	F4	C325	F4	C447	*B4	C627	A3	C798	*D3	C907	E2	C999	C4
C142	*E5	C234	F2	C326	F2	C448	B1	C628	*A4	C799	*D3	C908	D2		
C143	*B5	C235	F3	C327	F3	C449	*B1	C629	A2	C800	*D4	C909	E2	CL27	C4
C144	*A5	C236	F4	C328	F4	C450	B1	C630	A2	C801	*E4	C910	D2	CL28	C4
C145	*B4	C237	F1	C329	F2	C451	B2	C631	A5	C802	*D4	C911	E2	CL29	C4
C146	*B5	C238	F3	C330	F2	C452	B2	C632	A5	C803	*D4	C912	D2	CL30	C4
C147	*B5	C239	F4	C331	F3	C453	*B2	C633	*A5	C804	*D4	C913	E2	CL31	C4
C148	*A4	C240	F1	C332	F3	C454	*B1	C634	*A4	C805	*D4	C914	D2	CL32	C4
C149	*A5	C241	F2	C333	F4	C455	*B2	C701	*C4	C806	D4	C915	E2	CL33	C4
C150	*A5	C242	F4	C334	F4	C456	*B3	C702	*C4	C807	*E4	C916	D2	CL35	E3
C151	*E1	C243	F1	C335	F2	C457	*B3	C703	*D4	C808	*E4	C917	D2	CL36	*E4
C152	*F1	C244	F2	C336	F2	C458	*B3	C704	*E3	C809	*E4	C918	C2	CL101	E5
C153	*B4	C245	F2	C337	F3	C459	*B3	C705	*E4	C810	*E4	C919	D2	CL102	E1
C154	*B5	C246	F3	C338	F3	C460	*A3	C706	*D3	C820	*D3	C920	C2	CL103	E1
C155	*A5	C247	F4	C339	F4	C461	*B3	C707	*E3	C821	*D4	C921	E2	CL104	B5
C156	*A5	C248	F4	C340	F4	C462	*B3	C708	*E3	C822	*D4	C922	D2	CL105	A4
C157	*F5	C249	F2	C341	F2	C463	*B3	C709	*E4	C823	*D3	C923	C2	CL201	F1
C158	*E5	C250	F3	C342	F4	C464	*C4	C710	*E4	C824	*D3	C924	C2	CL202	F2
C159	F1	C251	F4	C343	F4	C501	*A1	C711	*E4	C825	*D3	C925	C2	CL203	F4
C160	F1	C252	F2	C344	F2	C502	*A2	C712	*D3	C826	*D3	C926	C2	CL204	F2
C161	*A5	C253	F2	C345	F3	C503	*A1	C713	*D4	C827	*D3	C927	C1	CL205	F3
C162	*B4	C254	F3	C346	F4	C504	*A2	C714	*D4	C828	*D3	C928	C2	CL206	F4
C163	*A5	C255	F3	C347	E2	C505	*A1	C715	*C3	C829	*D4	C929	C2	CL401	C4
C164	*B4	C256	F4	C348	E4	C506	*A2	C716	*C4	C830	*C4	C930	C2	CL402	C4
C165	B4	C257	F4	C349	E4	C507	*A2	C717	*C4	C831	*C4	C931	C2	CL403	C3
C166	B4	C258	F1	C350	F2	C508	*A1	C718	*D4	C832	*C4	C932	C2	CL601	A5
C167	*F5	C259	F2	C351	E4	C509	*A2	C719	*C4	C833	*C4	C933	C2		
C168	*D1	C260	F2	C352	E4	C510	*A1	C720	*C4	C834	*D3	C934	*D2	CN101	*E3
C169	*E1	C261	F3	C353	E4	C511	*A2	C721	*D4	C835	*D3	C935	*D2	CN201	D1
C170	*E1	C262	F4	C354	E4	C512	*A1	C722	*C4	C836	*D4	C936	*D2	CN601	A2
C171	*F5	C263	F4	C355	*F1	C513	*A1	C723	*D4	C837	*D3	C937	*D2		
C172	*F2	C264	F2	C356	*F1	C514	*A1	C724	*D4	C838	*D3	C938	*E2	D11	C3
C173	*A2	C265	F3	C357	*F1	C515	*A2	C727	*C5	C839	*D3	C939	*C1	D102	E1
C174	*B1	C266	F3	C358	*F3	C516	*A1	C728	*D4	C840	*D3	C940	*E2	D103	E1
C175	*C4	C267	F2	C359	*F4	C517	*A2	C729	*E3	C841	*D3	C941	*C2	D104	E1
C176	*B1	C268	F3	C360	*F2	C518	*A1	C730	*E4	C842	*D3	C942	*E1	D501	*A1
C177	*F4	C269	F4	C361	*F3	C519	A1	C731	*D3	C843	*D4	C943	*C2	D502	*A2
C178	*F3	C270	E1	C362	*F4	C520	A1	C732	*E3	C844	*D4	C944	*E2	D504	A1
C179	*F2	C271	E3	C371	*B1	C521	A1	C733	*E3	C845	*D4	C945	*C2	D505	A1
C180	*F3	C272	E3	C372	*C1	C522	A1	C734	*E4	C846	*D4	C946	*E2	D506	A1
C181	*F2	C273	F1	C373	*C1	C523	A1	C735	*E4	C847	*D4	C947	*C2	D507	*A2
C182	*F1	C274	F3	C374	*C1	C524	A1	C736	*E4	C848	*D4	C948	*E2		
C183	C1	C275	E3	C375	*D1	C525	A1	C737	*D3	C849	*D4	C949	*C2	E1	F1
C184	*C1	C276	E2	C376	*D1	C526	A1	C738	*D4	C850	*D4	C950	*D2	E2	B1
C185	*E1	C277	E2	C377	*E4	C527	*A2	C739	*D4	C851	*D4	C951	*D2		

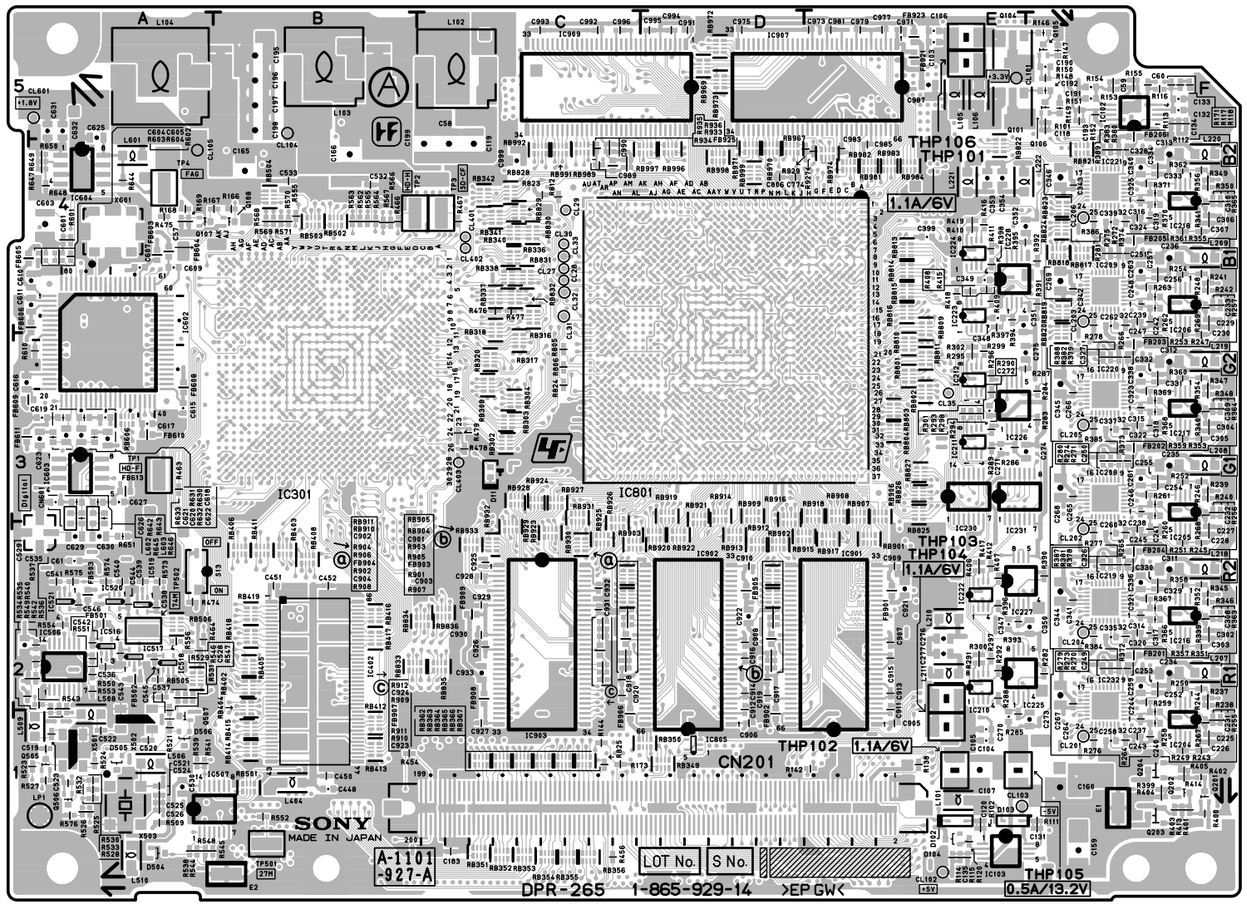

DPR-265 -A SIDE-
SUFFIX: -13, 14

FB101	*C5	FB609	A3	FB921	E5	IC201	*F2	IC227	E2	IC511	*A2	IC904	*E2	L208	F3	L504	*A2	Q104	E5
FB102	*B5	FB610	A3	FB922	*E5	IC202	*F3	IC228	E4	IC512	*A1	IC905	*D2	L209	F4	L505	*A2	Q105	F5
FB103	*C5	FB611	A3	FB923	E5	IC203	*F4	IC230	E3	IC513	*A1	IC906	*C2	L210	E2	L506	A1	Q106	F5
FB104	*B5	FB612	*A3	FB924	*D5	IC204	F1	IC231	E3	IC514	*A2	IC907	E5	L211	E2	L507	*A2	Q107	A4
FB105	*F5	FB613	A3	FB925	C4	IC205	F3	IC232	F2	IC515	*A2	IC908	*D5	L212	*F2	L508	A1	Q108	B4
FB106	*E5	FB901	E2	FB926	*C5	IC206	F4	IC301	B3	IC516	A2	IC909	C5	L213	*F3	L509	A1	Q201	F1
FB107	*E5	FB902	D1	FB927	*C5	IC208	F3	IC302	*C1	IC517	A2			L214	*F4	L510	A1	Q202	F1
FB108	*E5	FB903	D2			IC209	F4	IC303	*C1	IC518	A2	L101	E1	L215	*F2	L511	*A2	Q203	F1
FB201	F2	FB904	C2	FL201	*F1	IC210	E2	IC304	*C1	IC519	A2	L102	C5	L216	*F3	L512	*B1	Q204	F1
FB202	F3	FB905	D2	FL202	*F3	IC211	E3	IC305	*C1	IC520	A2	L103	B5	L217	*F4	L601	A4	Q501	*A2
FB203	F3	FB906	C1	FL203	*F4	IC212	E3	IC306	*D1	IC521	A2	L104	A5	L218	F2	L602	A3	Q502	*B1
FB204	F2	FB907	C2	FL204	*F2	IC213	*F2	IC307	*D1	IC522	*E4	L105	E5	L219	F3	L603	A3	Q503	*A1
FB205	F4	FB908	C2	FL205	*F3	IC214	*F3	IC308	*E4	IC523	*E4	L106	E5	L220	F4	L801	*C5	Q504	*A2
FB206	F5	FB909	C2	FL206	*F4	IC215	*F4	IC310	*A3	IC601	*A4	L107	*E1	L221	E4	L802	*C4	Q505	A1
FB501	A2	FB910	*D2			IC216	F2	IC402	B2	IC602	A3	L108	*F1	L222	E4	L803	*C4	Q506	A1
FB502	A2	FB911	*D2	IC101	*E1	IC217	F3	IC405	*B2	IC603	A3	L109	*E1	L401	*A4	L804	*C4	Q507	A1
FB503	A2	FB912	*E2	IC102	F5	IC218	F4	IC501	*A1	IC604	A4	L111	*F5	L402	*A4	L805	*C4	Q601	*A4
FB601	*A4	FB913	*C2	IC103	E1	IC219	F2	IC502	*A2	IC801	D3	L112	*F5	L403	*B4	L806	*B1	Q602	*A5
FB602	*A4	FB914	*D2	IC104	*B5	IC220	F3	IC503	*A1	IC802	*B1	L201	*F1	L404	B1			Q603	*A4
FB603	A4	FB915	*D1	IC105	*B5	IC221	F4	IC504	*A2	IC803	*E4	L202	*F2	L405	*B1	LP1	A1	Q604	*A4
FB604	A4	FB916	*C2	IC106	*B4	IC222	E2	IC505	*A1	IC804	*D1	L203	*F3	L406	*A3				
FB605	A4	FB917	*C2	IC107	*E1	IC223	E4	IC506	A2	IC805	D1	L204	*F2	L407	*C4	Q11	*C3	R11	*B5
FB606	A4	FB918	*C1	IC108	*E1	IC224	E4	IC507	B1	IC901	E2	L205	*F3	L501	*A1	Q101	E5	R12	*A5
FB607	*A4	FB919	*E5	IC110	*E3	IC225	E2	IC509	*B4	IC902	D2	L206	*F4	L502	*A2	Q102	*E1	R101	F5
FB608	A3	FB920	*D4	IC111	*C2	IC226	E3	IC510	*B4	IC903	C2	L207	F2	L503	*A1	Q103	*E1	R102	E1

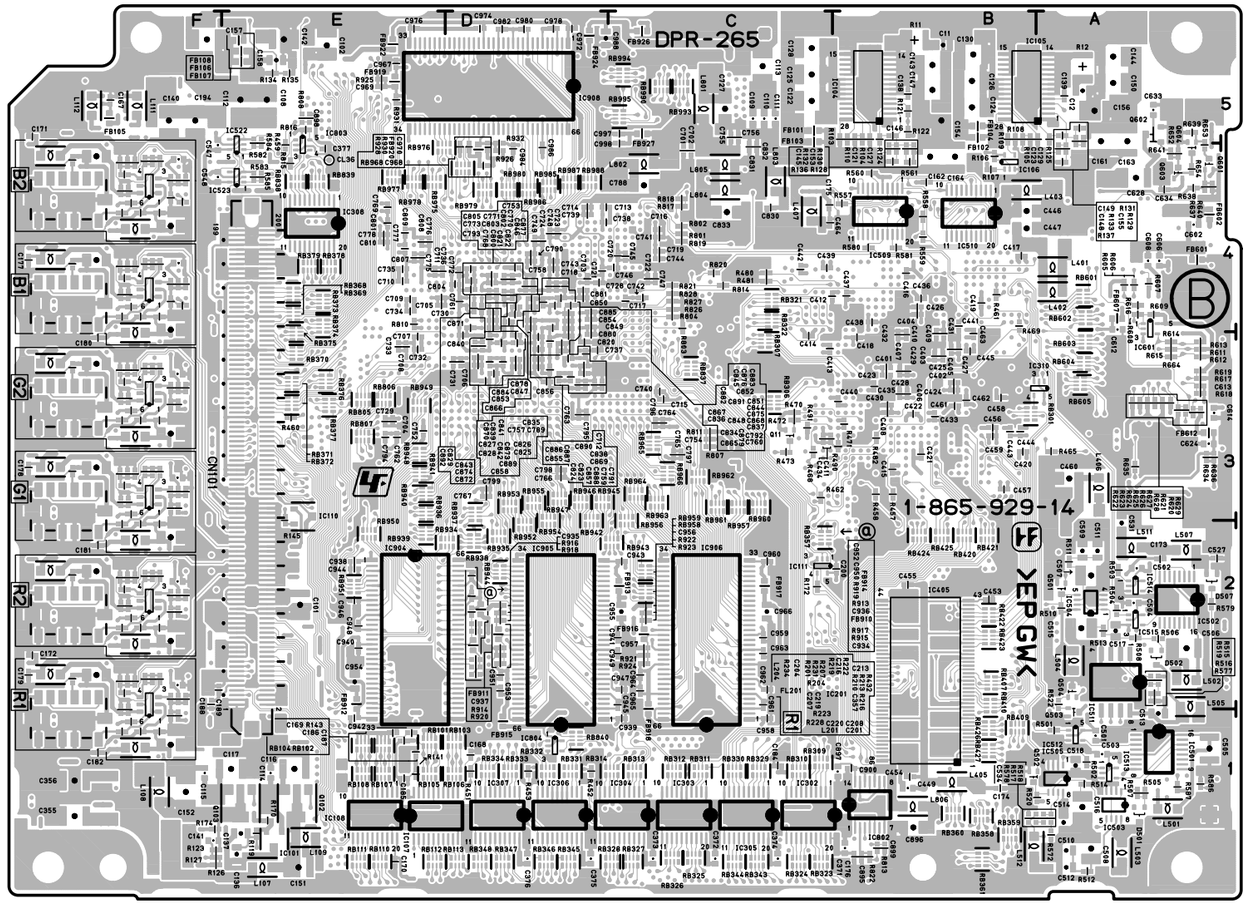

DPR-265 -B SIDE-


SUFFIX: -13, 14

R103	*B5	R128	*B4	R155	F5	R216	*F1	R241	F4	R266	F4	R291	E2	R319	*F3	R344	*F4	R369	F3
R104	*B5	R129	*A5	R166	B4	R217	*F3	R242	F4	R267	F1	R292	E2	R320	*F4	R345	F2	R370	F4
R105	*B5	R130	*B4	R167	B4	R218	*F4	R243	F1	R268	F3	R293	E3	R321	*F2	R346	F2	R371	F4
R106	*B4	R131	*A5	R168	A4	R219	*F2	R244	F2	R269	F4	R294	E3	R322	*F3	R347	F3	R372	F2
R107	*B4	R132	*B4	R169	A4	R220	*F3	R245	F2	R270	F2	R295	E3	R323	*F4	R348	F3	R373	F3
R108	*B5	R133	*A4	R170	*E1	R221	*F4	R246	F3	R271	F3	R296	E3	R324	*F2	R349	F4	R374	F4
R109	*B5	R134	*E5	R171	F5	R222	*F2	R247	F3	R272	F4	R297	E2	R325	*F3	R350	F4	R378	F2
R110	*B5	R135	*E5	R172	*C2	R223	*F1	R248	F4	R273	F2	R298	E3	R326	*F4	R351	F2	R379	F3
R111	F1	R136	*B4	R173	C1	R224	*F3	R249	F1	R274	F3	R299	E3	R327	*F2	R352	F2	R380	F4
R112	F5	R137	*A4	R174	*F1	R225	*F3	R250	F2	R275	F4	R300	E2	R328	*F3	R353	F3	R381	F2
R113	F5	R138	E1	R201	*F2	R226	*F4	R251	F2	R276	F1	R301	E3	R329	*F4	R354	F3	R382	F3
R114	E1	R141	*E1	R202	*F3	R227	*F4	R252	F3	R277	F2	R302	E3	R330	*F2	R355	F4	R383	F4
R115	E1	R142	E1	R203	*F4	R228	*F1	R253	F3	R278	F4	R303	*F2	R331	*F2	R356	F4	R384	F2
R116	F5	R143	*E1	R204	*F2	R229	*F2	R254	F4	R279	F2	R304	*F3	R332	*F3	R357	F2	R385	F3
R117	F5	R144	C1	R205	*F3	R230	*F4	R255	F1	R280	F3	R305	*F4	R333	*F3	R358	F2	R386	F4
R118	F5	R145	*E2	R206	*F4	R231	*F2	R256	F3	R281	F4	R309	*F2	R334	*F4	R359	F3	R387	F2
R119	*E1	R146	F5	R207	*F2	R232	*F3	R257	F4	R282	F2	R310	*F3	R335	*F4	R360	F3	R388	F3
R120	E1	R147	F5	R208	*F3	R233	*F4	R258	F1	R283	F3	R311	*F4	R336	*F2	R361	F4	R389	F4
R121	*B5	R148	F5	R209	*F4	R234	*F2	R259	F1	R284	F3	R312	*F2	R337	*F3	R362	F4	R390	F2
R122	*B5	R149	F5	R210	*F2	R235	*F3	R260	F3	R285	E1	R313	*F3	R338	*F4	R363	F2	R391	F4
R123	*F1	R150	F5	R211	*F3	R236	*F4	R261	F3	R286	E3	R314	*F4	R339	F2	R364	F3	R392	F4
R124	*B5	R151	F5	R212	*F4	R237	F2	R262	F4	R287	E3	R315	*F2	R340	F3	R365	F4	R393	E2
R125	*A5	R152	F5	R213	*F2	R238	F2	R263	F4	R288	E2	R316	*F3	R341	F4	R366	F2	R394	E4
R126	*F1	R153	F5	R214	*F3	R239	F3	R264	F1	R289	E3	R317	*F4	R342	*F2	R367	F2	R395	E4
R127	*F1	R154	F5	R215	*F4	R240	F3	R265	F2	R290	E3	R318	*F2	R343	*F3	R368	F3	R396	E2


R397	E4	R531	A1	R636	*A3	RB110	*E1	RB416	B2	RB931	C3								
R398	E4	R532	A1	R637	*A4	RB111	*E1	RB417	B2	RB932	C2								
R399	F1	R533	A1	R638	*A4	RB112	*E1	RB418	B2	RB933	C2								
R400	F1	R534	A2	R639	*A5	RB113	*D1	RB419	B2	RB934	*D2								
R401	F1	R535	A2	R640	*A4	RB301	*B3	RB420	*B2	RB935	*D2								
R402	F1	R536	A2	R641	*A4	RB302	C3	RB421	*B2	RB936	*E3								
R403	F1	R537	A2	R642	A3	RB303	C3	RB422	*B2	RB937	*D3								
R404	F1	R538	A1	R643	A3	RB304	C3	RB423	*B2	RB938	*D2								
R405	F1	R539	A1	R644	A4	RB306	*C3	RB424	*B2	RB939	*E2								
R406	E2	R540	A2	R645	A3	RB307	*C3	RB425	*B2	RB940	*E3								
R407	E2	R541	A1	R646	A3	RB308	C3	RB426	*B1	RB941	*E3								
R408	E4	R542	A2	R647	A4	RB309	*C1	RB427	*B1	RB942	*D2								
R409	E4	R543	A2	R648	A4	RB310	*C1	RB501	B1	RB943	*C2								
R410	E4	R544	A1	R649	A4	RB311	*C1	RB502	B4	RB944	*D2								
R411	E4	R545	A1	R650	A4	RB312	*C1	RB503	B4	RB945	*D3								
R412	E2	R546	A2	R651	A2	RB313	*C1	RB504	B4	RB946	*D3								
R413	F1	R547	A2	R652	*A4	RB314	*C1	RB505	A2	RB947	*D3								
R414	F1	R548	A1	R653	*A4	RB316	C4	RB506	A2	RB948	*E3								
R415	E4	R549	A2	R654	*A4	RB317	C3	RB601	*A4	RB949	*E3								
R416	E4	R550	A2	R664	*A3	RB318	C4	RB602	*A4	RB950	*E2								
R417	E2	R551	A2	R801	*C4	RB320	C3	RB603	*A3	RB951	*E2								
R418	E4	R552	B1	R802	*C4	RB321	*C4	RB604	*A3	RB952	*D2								
R419	E4	R553	A2	R803	*C4	RB322	*C4	RB605	*A3	RB953	*D3								
R432	*F2	R554	A2	R804	*C4	RB323	*C1	RB606	A3	RB954	*D2								
R433	*F3	R555	B4	R805	C3	RB324	*C1	RB801	E3	RB955	*D3								
R434	*F4	R556	A2	R806	C3	RB325	*C1	RB802	E3	RB956	*C2								
R435	*F2	R557	*B4	R807	*C3	RB326	*C1	RB803	E3	RB957	*C3								
R436	*F3	R558	*B4	R808	*E5	RB327	*C1	RB804	E3	RB958	*C2								
R437	*F4	R559	*B4	R810	*E4	RB328	*C1	RB805	*E3	RB959	*C2								
R451	*D1	R560	*B4	R811	*C3	RB329	*C1	RB806	*E3	RB960	*C3								
R452	*D1	R561	*B4	R812	C4	RB330	*C1	RB807	*E3	RB961	*C3								
R453	*D1	R562	B4	R813	*B1	RB331	*D1	RB809	E4	RB962	*C3								
R454	B1	R563	B4	R814	*C4	RB332	*D1	RB810	E3	RB963	*C3								
R456	C1	R564	B4	R815	*E4	RB333	*D1	RB811	E3	RB964	*C3								
R457	*B3	R565	B4	R816	*E5	RB334	*D1	RB813	E4	RB965	*C3								
R458	*B3	R566	B4	R817	*C4	RB336	C4	RB814	E4	RB966	*C3								
R459	*E4	R567	B4	R818	*C4	RB337	C4	RB815	E4	RB967	D4								
R460	*E3	R568	B4	R819	*C4	RB338	C4	RB816	E4	RB968	*D4								
R461	*B4	R569	B4	R820	*C4	RB340	C4	RB817	F4	RB969	D5								
R462	*C3	R570	B4	R821	*C4	RB341	C4	RB818	F4	RB970	D4								
R463	A3	R571	B4	R822	*B1	RB342	C4	RB819	F4	RB971	D4								
R464	A2	R572	*A1	R823	C4	RB343	*C1	RB820	F4	RB972	D5								
R465	*A3	R573	A2	R824	C3	RB344	*C1	RB821	F4	RB973	D5								
R466	B4	R574	A2	R825	C1	RB345	*D1	RB822	E4	RB974	E4								
R467	C4	R575	A2	R826	*C4	RB346	*D1	RB823	F4	RB975	*E4								
R468	*C3	R576	A1	R827	*C4	RB347	*D1	RB824	F4	RB976	*E4								
R469	*B4	R577	*A2	R828	*C4	RB348	*D1	RB825	E3	RB977	*E4								
R470	*C3	R578	*A1	R901	D2	RB349	D1	RB826	E3	RB978	*E4								
R471	*B3	R579	*A2	R902	C2	RB350	D1	RB827	E3	RB979	*D4								
R472	*C3	R580	*B4	R903	D2	RB351	C1	RB828	C4	RB980	*D4								
R473	*C3	R581	*B4	R904	C2	RB352	C1	RB829	C4	RB981	E4								
R474	A2	R582	*E4	R905	D2	RB353	C1	RB830	C4	RB982	E4								
R475	A4	R583	*E4	R906	C2	RB354	C1	RB831	C4	RB983	E4								
R476	C4	R584	*E4	R907	D2	RB355	C1	RB832	C4	RB984	E4								
R477	C4	R585	*E4	R908	C2	RB356	C1	RB833	B2	RB985	*D4								
R478	C3	R586	*A1	R909	C2	RB357	*C2	RB834	C2	RB986	*D4								
R479	C3	R587	*A1	R910	C2	RB358	*B1	RB835	C2	RB987	*D4								
R480	*C4	R601	A4	R911	C2	RB359	*B1	RB836	C2	RB988	*D4								
R481	*C4	R602	A4	R912	C2	RB360	*B1	RB837	*C3	RB989	C4								
R482	*B3	R603	A4	R913	*D2	RB361	*B1	RB838	*E4	RB990	*C5								
R490	*B3	R604	A4	R914	*D2	RB362	C1	RB839	*E4	RB991	C4								
R491	*C3	R605	*A4	R915	*D2	RB363	C1	RB840	*D1	RB992	C4								
R501	*A1	R606	*A4	R916	*D2	RB364	C1	RB901	E2	RB993	*C5								
R502	*A1	R607	*A4	R917	*D2	RB365	C1	RB902	D2	RB994	*C5								
R503	*A2	R608	*A4	R918	*D2	RB366	C1	RB903	C2	RB995	*C5								
R504	*A2	R609	*A4	R919	*D2	RB367	C1	RB904	D2	RB996	D4								
R505	*A1	R610	A3	R920	*D2	RB368	*E4	RB905	D2	RB997	D4								
R506	*A2	R611	*A3	R921	*C2	RB369	*E4	RB906	E3	RB998	D4								
R507	*A1	R612	*A3	R922	*C2	RB370	*E3	RB907	E3	RB999	D4								
R508	*A2	R613	*A3	R923	*C2	RB371	*E3	RB908	E3										
R509	A1	R614	*A3	R924	*C2	RB372	*E3	RB909	D3	S13	A2								
R510	*A2	R615	*A3	R925	*E5	RB373	*E4	RB910	C2										
R511	*A2	R616	*A4	R926	*D4	RB374	*E4	RB911	C2	THP101	E5								
R512	*A1	R617	*A3	R927	E4	RB375	*E3	RB912	D2	THP102	E1								
R513	*A2	R618	*A3	R928	*D4	RB376	*E3	RB913	D2	THP103	E2								
R514	*A1	R619	*A3	R929	E4	RB377	*E3	RB914	D3	THP104	E1								
R515	*A2	R620	*A3	R930	*D4	RB378	*E4	RB915	D2	THP105	E1								
R516	*A2	R621	*A3	R931	*E5	RB379	*E4	RB916	D3	THP106	E5								
R517	*A1	R622	*A3	R932	*D4	RB402	B2	RB917	E2										
R518	*A1	R623	*A3	R933	C4	RB403	B2	RB918	E3	TP1	A3								
R519	*A2	R624	*A3	R934	C4	RB404	B2	RB919	D3	TP2	B4								
R520	*A1	R625	*A3	R935	C4	RB405	B2	RB920	D2	TP3	C4								
R521	A1	R626	*A3	R936	C4	RB406	B2	RB921	D3	TP4	A4								
R522	*A2	R627	*A3			RB407	*B2	RB922	D2	TP501	B1								
R523	A1	R628	*A3	RB101	*E1	RB408	B2	RB923	C2	TP502	A2								
R524	A1	R629	*A3	RB102	*E1	RB409	*B1	RB924	C3										
R525	A1	R630	A3	RB103	*D1	RB410	*B2	RB925	C2	X501	A1								
R526	A1	R631	A3	RB104	*E1	RB411	B2	RB926	C2	X502	A1								
R527	A1	R632	A3	RB105	*E1	RB412	B1	RB927	C3	X503	A1								
R528	A1	R633	A3	RB106	*D1	RB413	B1	RB928	C3	X601	A4								
R529	A2	R634	*A3	RB107	*E1	RB414	B1	RB929	C2										
R530	A1	R635	*A3	RB108	*E1	RB415	B1	RB930	C2	*:B SIDE									

DR-528 (1-865-973-14)

C1	*C1	C71	B2	Q8	*A2	R40	C1
C2	*C1	C72	B2	Q9	*C1	R41	*C1
C3	*C1	C73	B2	Q10	*C1	R42	B1
C4	*C1	C74	B2	Q11	A1	R43	B2
C5	B2			Q12	*A1	R44	B1
C6	C1	CN1	C2	Q13	B1	R45	B1
C7	C1	CN2	A2	Q14	A1	R46	B1
C8	C1	CN3	A1	Q15	A1	R47	B1
C9	C1	CN4	*B1	Q16	*B1	R48	B1
C10	A1			Q17	*A1	R49	B1
C11	C1	D1	B2	Q18	*A1	R50	B1
C12	C1	D2	B2	Q19	C1	R51	B1
C13	B1	D3	C2	Q20	*C2	R52	B1
C14	B1	D4	*B2	Q21	C1	R53	B1
C15	B1	D5	*B2	Q22	*C2	R54	B1
C16	B1	D6	*B2	Q23	B2	R55	B1
C17	*C1	D7	*B2	Q24	B2	R56	B1
C18	C1	D8	B1	Q25	A1	R57	A1
C19	C1			Q26	B2	R58	A1
C20	*C1	E1	C1	Q27	B2	R59	B1
C21	*A1			Q28	A1	R60	B2
C22	*C1	FB1	*B1	Q29	A1	R61	B2
C23	*C1	FB2	*B1	Q30	A1	R62	A1
C24	*C1	FB3	*B1	Q31	*A1	R63	B1
C25	*C1	FB4	*B1	Q32	A1	R64	B2
C26	B2	FB5	*A1	Q33	*B2	R65	B1
C27	A1	FB6	*A1	Q34	*B2	R66	A1
C28	*C2	FB7	*A1	Q35	*A1	R67	B1
C29	C2	FB8	*A1	Q36	*B2	R68	*B1
C30	*C2	FB9	B1	Q37	*B2	R69	*B2
C31	C2	FB10	B1			R70	*B2
C32	C2	FB11	B1	R1	C2	R71	*B2
C33	*C2	FB12	B1	R2	C2	R72	*B2
C34	B1			R3	C2	R73	*B2
C35	B1	HA001	A1	R4	C2	R74	*B2
C36	*C2			R5	A2	R75	*B2
C37	*C1	HB001	*A1	R6	C1	R76	*B2
C38	*A2			R7	C1	R77	*B2
C39	*C2	IC1	C1	R8	A2	R78	B2
C40	*B2	IC2	B1	R9	C1	R79	B2
C41	*B1	IC3	A2	R10	A2	R80	B2
C42	B2	IC4	*A2	R11	C1	R81	B2
C43	*B1	IC5	B1	R12	C1	R82	B2
C44	*B1	IC6	B1	R13	C1	R83	B2
C45	*B1	IC7	B2	R14	C1	R84	B2
C46	*B1	IC8	B2	R15	*A2	R85	B2
C47	B1	IC9	B2	R16	C1	R86	B2
C48	B1	IC10	C1	R17	*A2	R93	B2
C49	B1	IC11	C1	R18	*A2	R94	B2
C50	C1	IC12	B1	R19	C1	R95	B2
C51	B1	IC13	B1	R20	C1	R96	C1
C52	A1	IC14	C1	R21	C1	R97	C1
C53	B2			R22	C1	R98	B1
C54	A1	KA001	A1	R23	C1	R99	B1
C55	B1			R24	C1	R100	B1
C56	A1	KB001	*A1	R25	A1	R101	B1
C57	*B1			R26	A1		
C58	*B2	L1	C2	R27	C2	RB1	A1
C59	*B1	L2	B2	R28	A2	RB2	A1
C60	*B2	L3	C2	R29	C2	RB3	B1
C61	*B2	L4	A2	R30	C1	RB4	A2
C62	*B2	L5	B2	R31	C1	RB5	*A2
C63	*B2			R32	C2		
C64	*B2	Q1	A2	R33	C2	*:B SIDE	
C65	*B2	Q2	A2	R34	C2		
C66	*B2	Q3	A2	R35	C1		
C67	B2	Q4	*C1	R36	C1		
C68	B2	Q5	*A2	R37	*C1		
C69	B2	Q6	C1	R38	C2		
C70	B2	Q7	*A2	R39	C2		

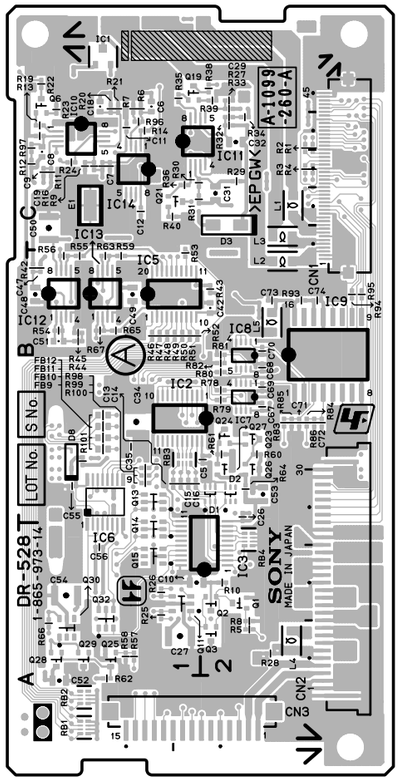

DR-528 -A SIDE-
SUFFIX: -14

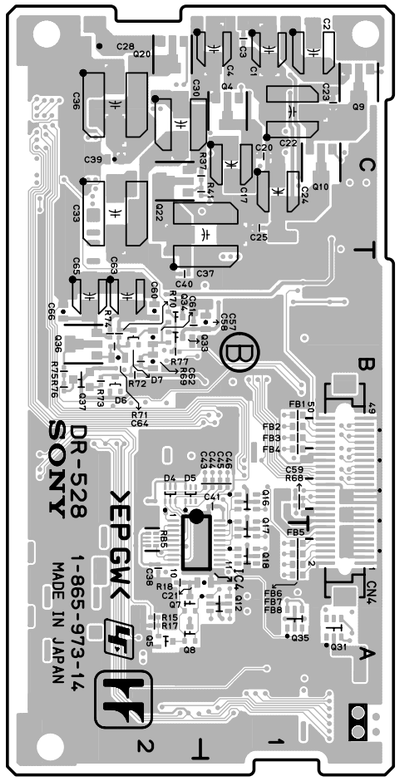


DR-528 -B SIDE-
SUFFIX: -14


DR-562, DU-369

DR-562 (1-865-961-11)


C1	*C1	C71	C2	FB19	B1	Q28	C2	R58	C1
C2	B2	C72	C1	FB20	B1	Q29	C2	R59	C1
C3	A2	C73	C1	FB21	B1	Q30	C2	R60	*B2
C4	C1	C74	C1	FB22	B1	Q31	C2	R61	*B2
C5	C1	C75	C1	FB23	B1	Q32	C2	R62	C1
C6	C1	C76	C1	FB24	B1	Q33	C2	R63	*C2
C7	C1	C77	*C2	FB25	B1	Q34	C2	R64	C1
C8	*A2	C78	*C2	FB26	B1	Q35	*C2	R65	*B2
C9	B1	C79	B1	FB27	B1	Q36	*B2	R66	*B2
C10	B1	C80	B1	FB28	B1	Q37	*C2	R67	*B2
C11	B1	C81	*B2	FB29	A1	Q38	*B2	R68	C1
C12	B1	C82	*C2	FB30	A1	Q39	*C1	R69	*C2
C13	*C1	C83	*B2	FB31	A1			R70	*C2
C14	B1	C84	*B2	FB32	A1	R1	C2	R71	*B2
C15	B1	C85	*C2	FB33	A1	R2	C2	R72	*B2
C16	B1	C86	*B2	FB34	A1	R3	C2	R73	C1
C17	B1	C87	*C2	FB35	A1	R4	C2	R74	*C1
C18	B1	C88	*C2	FB36	A1	R5	C1	R75	*C1
C19	B1	C89	*C1			R6	C1	R76	*C1
C20	B1	C90	B2	IC1	B2	R7	*A2	R77	*C1
C21	B1	C91	B2	IC2	B2	R8	C1	R78	B2
C22	*C1	C92	B2	IC3	*C1	R9	*A2	R79	B2
C23	*C1	C93	C2	IC4	*A2	R10	*A2	R80	B2
C24	*C2	C94	B2	IC5	*A2	R11	C1	R81	C2
C25	*C2	C95	B2	IC6	A2	R12	*B2	R82	B2
C26	*A2	C96	C2	IC7	A1	R13	*B2	R83	B2
C27	C1	C97	C2	IC8	C1	R14	*B2	R84	B2
C28	C1	C98	*B1	IC9	B1	R15	C1	R85	B2
C29	*B2	C99	*B2	IC10	B2	R16	*A2	R86	B2
C30	*A2			IC11	B2	R17	C1	R93	C2
C31	A2	CN1	C2	IC12	B2	R18	C1	R94	C2
C32	C1	CN2	A2	IC13	C1	R19	*A2	R95	C2
C33	C1	CN3	A1	IC14	C2	R20	C1	R96	B1
C34	*C1	CN4	*B1	IC15	C1	R21	C1	R97	B1
C35	*C1			IC16	C1	R22	C1	R98	B1
C36	*C1	D1	*B1	IC17	C1	R23	C1	R99	*B2
C37	*C2	D2	*A1	IC18	*B2	R24	C1	R100	C1
C38	*C1	D3	*A1			R25	C1	R101	*C2
C39	*C2	D4	*A1	L1	C2	R26	C1	R102	*B2
C40	A1	D5	*A1	L2	C2	R27	C2	R103	B2
C41	A1	D6	C2	L3	C2	R28	*A2		
C42	A1	D7	A2	L5	C2	R29	C2	RB1	A1
C43	A2	D8	A1			R30	C2	RB2	A1
C44	A1	D9	A2	Q1	*A2	R31	C2	RB3	B2
C45	C2	D10	A1	Q2	*A2	R32	C2	RB4	B2
C46	C2	D11	A1	Q3	*A2	R33	C2	RB5	B2
C47	*C1	D12	*B2	Q4	C1	R34	C2	RB6	*B2
C48	A1	D13	*C2	Q5	*B2	R35	C2	RB7	*A2
C49	A2	D14	B1	Q6	*A2	R36	C2	RB8	*A2
C50	A2			Q7	*B2	R37	C2	RB9	A2
C51	A2	E1	C1	Q8	*A2	R38	C2	RB10	A2
C52	C2			Q9	*A2	R39	C1	RB11	A1
C53	C2	FB1	*B1	Q10	C1	R40	C2		
C54	B1	FB2	*B1	Q11	C1	R41	C2	*:B SIDE	
C55	B1	FB3	*B1	Q12	A2	R42	C2		
C56	B1	FB4	*B1	Q13	A2	R43	C1		
C57	B1	FB5	*B1	Q14	A2	R44	C2		
C58	B1	FB6	*B1	Q15	A1	R45	C1		
C59	B1	FB7	*B1	Q16	A1	R46	C1		
C60	B1	FB8	*B1	Q17	A1	R47	B1		
C61	B1	FB9	*B1	Q18	A1	R48	B1		
C62	B1	FB10	*B1	Q19	C1	R49	B1		
C63	B1	FB11	*B1	Q20	A2	R50	B1		
C64	B1	FB12	*B1	Q21	A2	R51	B1		
C65	B1	FB13	*A1	Q22	A2	R52	C1		
C66	*C2	FB14	*A1	Q23	A1	R53	C1		
C67	*C2	FB15	*A1	Q24	A1	R54	C1		
C68	*C2	FB16	*A1	Q25	A1	R55	C1		
C69	*C2	FB17	B1	Q26	A1	R56	C1		
C70	C1	FB18	B1	Q27	C2	R57	C1		

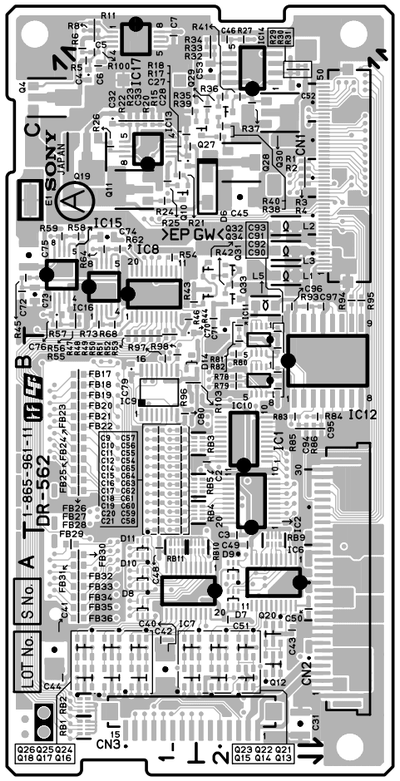


DR-562 -A SIDE-
SUFFIX: -11

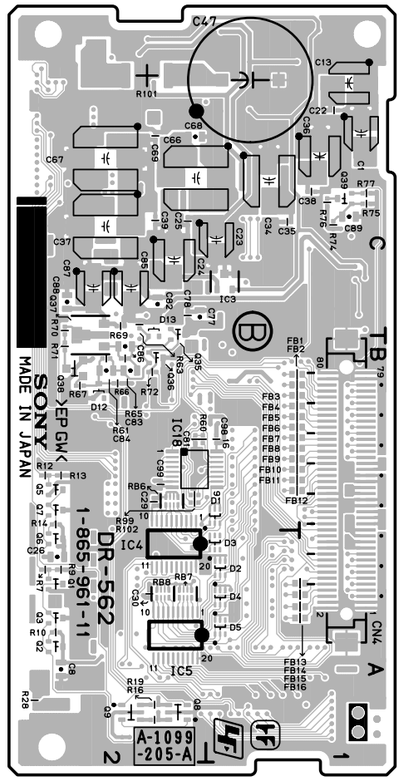

DR-562 -B SIDE-
SUFFIX: -11




DU-369 -A SIDE-
SUFFIX: -11




DU-369 -B SIDE-
SUFFIX: -11

DR-528 (1-865-973-21)

C1	*C1	C71	B2	Q16	*B1	R48	B1
C2	*C1	C72	B2	Q17	*A1	R49	B1
C3	*C1	C73	B2	Q18	*A1	R50	B1
C4	*C1	C74	B2	Q19	C1	R51	B1
C5	B2			Q20	*C2	R52	B1
C6	C1	CN1	C2	Q21	C1	R53	B1
C7	C1	CN2	A2	Q22	*C2	R54	B1
C8	C1	CN3	A1	Q23	B2	R55	B1
C9	C1	CN4	*B1	Q24	B2	R56	B1
C10	A1			Q25	A1	R57	A1
C11	C1	D1	B2	Q26	B2	R58	A1
C12	C1	D2	B2	Q27	B2	R59	B1
C13	B1	D3	C2	Q28	A1	R60	B2
C14	B1	D4	*B2	Q29	A1	R61	B2
C15	B1	D5	*B2	Q30	A1	R62	A1
C16	B1	D6	*B2	Q31	*A1	R63	B1
C17	*C1	D7	*B2	Q32	A1	R64	B2
C18	C1	D8	B1	Q33	*B2	R65	B1
C19	C1			Q34	*B2	R66	A1
C20	*C1	E1	C1	Q35	*A1	R67	B1
C21	*A1			Q36	*B2	R68	*B1
C22	*C1	FB1	*B1	Q37	*B2	R69	*B2
C23	*C1	FB2	*B1			R70	*B2
C24	*C1	FB3	*B1	R1	C2	R71	*B2
C25	*C1	FB4	*B1	R2	C2	R72	*B2
C26	B2	FB5	*A1	R3	C2	R73	*B2
C27	A1	FB6	*A1	R4	C2	R74	*B2
C28	*C2	FB7	*A1	R5	A2	R75	*B2
C29	C2	FB8	*A1	R6	C1	R76	*B2
C30	*C2	FB9	B1	R7	C1	R77	*B2
C31	C2	FB10	B1	R8	A2	R78	B2
C32	C2	FB11	B1	R9	C1	R79	B2
C33	*C2	FB12	B1	R10	A2	R80	B2
C34	B1			R11	C1	R81	B2
C35	B1	IC1	C1	R12	C1	R82	B2
C36	*C2	IC2	B1	R13	C1	R83	B2
C37	*C1	IC3	A2	R14	C1	R84	B2
C38	*A2	IC4	*A2	R15	*A2	R85	B2
C39	*C2	IC5	B1	R16	C1	R86	B2
C40	*B2	IC6	B1	R17	*A2	R93	B2
C41	*B1	IC7	B2	R18	*A2	R94	B2
C42	B2	IC8	B2	R19	C1	R95	B2
C43	*B1	IC9	B2	R20	C1	R96	C1
C44	*B1	IC10	C1	R21	C1	R97	C1
C45	*B1	IC11	C1	R22	C1	R98	B1
C46	*B1	IC12	B1	R23	C1	R99	B1
C47	B1	IC13	B1	R24	C1	R100	B1
C48	B1	IC14	C1	R25	A1	R101	B1
C49	B1			R26	A1		
C50	C1	L1	C2	R27	C2	RB1	A1
C51	B1	L2	B2	R28	A2	RB2	A1
C52	A1	L3	C2	R29	C2	RB3	B1
C53	B2	L4	A2	R30	C1	RB4	A2
C54	A1	L5	B2	R31	C1	RB5	*A2
C55	B1			R32	C2		
C56	A1	Q1	A2	R33	C2	*:B SIDE	
C57	*B1	Q2	A2	R34	C2		
C58	*B2	Q3	A2	R35	C1		
C59	*B1	Q4	*C1	R36	C1		
C60	*B2	Q5	*A2	R37	*C1		
C61	*B2	Q6	C1	R38	C2		
C62	*B2	Q7	*A2	R39	C2		
C63	*B2	Q8	*A2	R40	C1		
C64	*B2	Q9	*C1	R41	*C1		
C65	*B2	Q10	*C1	R42	B1		
C66	*B2	Q11	A1	R43	B2		
C67	B2	Q12	*A1	R44	B1		
C68	B2	Q13	B1	R45	B1		
C69	B2	Q14	A1	R46	B1		
C70	B2	Q15	A1	R47	B1		

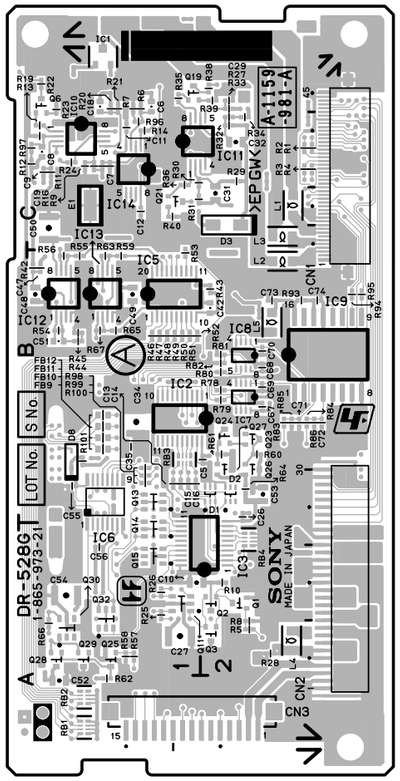


DR-528 -A SIDE-
SUFFIX: -21

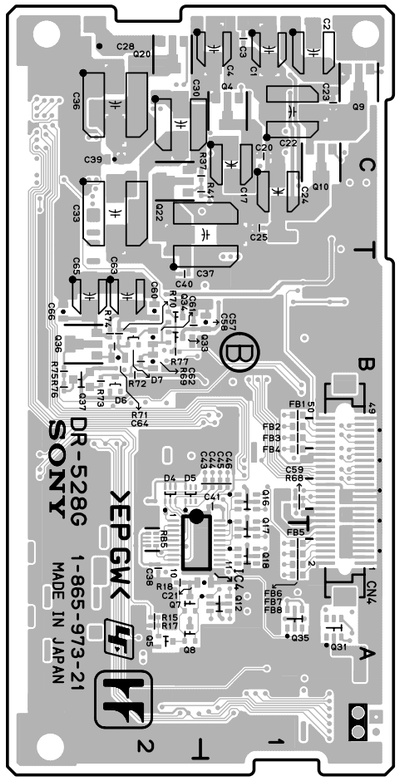


DR-528 -B SIDE-
SUFFIX: -21

DR-562 (1-865-961-21)

C1	*C1	C71	C2	FB19	B1	Q26	A1	R56	C1
C2	B2	C72	C1	FB20	B1	Q27	C2	R57	C1
C3	A2	C73	C1	FB21	B1	Q28	C2	R58	C1
C4	C1	C74	C1	FB22	B1	Q29	C2	R59	C1
C5	C1	C75	C1	FB23	B1	Q30	C2	R60	*B2
C6	C1	C76	C1	FB24	B1	Q31	C2	R61	*B2
C7	C1	C77	*C2	FB25	B1	Q32	C2	R62	C1
C8	*A2	C78	*C2	FB26	B1	Q33	C2	R63	*C2
C9	B1	C79	B1	FB27	B1	Q34	C2	R64	C1
C10	B1	C80	B1	FB28	B1	Q35	*C2	R65	*B2
C11	B1	C81	*B2	FB29	A1	Q36	*B2	R66	*B2
C12	B1	C82	*C2	FB30	A1	Q37	*C2	R67	*B2
C13	*C1	C83	*B2	FB31	A1	Q38	*B2	R68	C1
C14	B1	C84	*B2	FB32	A1	Q39	*C1	R69	*C2
C15	B1	C85	*C2	FB33	A1			R70	*C2
C16	B1	C86	*B2	FB34	A1	R1	C2	R71	*B2
C17	B1	C87	*C2	FB35	A1	R2	C2	R72	*B2
C18	B1	C88	*C2	FB36	A1	R3	C2	R73	C1
C19	B1	C89	*C1			R4	C2	R74	*C1
C20	B1	C90	B2	HB001	*A1	R5	C1	R75	*C1
C21	B1	C91	B2			R6	C1	R76	*C1
C22	*C1	C92	B2	IC1	B2	R7	*A2	R77	*C1
C23	*C1	C93	C2	IC2	B2	R8	C1	R78	B2
C24	*C2	C94	B2	IC3	*C1	R9	*A2	R79	B2
C25	*C2	C95	B2	IC4	*A2	R10	*A2	R80	B2
C26	*A2	C96	C2	IC5	*A2	R11	C1	R81	C2
C27	C1	C97	C2	IC6	A2	R12	*B2	R82	B2
C28	C1	C98	*B1	IC7	A1	R13	*B2	R83	B2
C29	*B2	C99	*B2	IC8	C1	R14	*B2	R84	B2
C30	*A2			IC9	B1	R15	C1	R85	B2
C31	A2	CN1	C2	IC10	B2	R16	*A2	R86	B2
C32	C1	CN2	A2	IC11	B2	R17	C1	R93	C2
C33	C1	CN3	A1	IC12	B2	R18	C1	R94	C2
C34	*C1	CN4	*B1	IC13	C1	R19	*A2	R95	C2
C35	*C1			IC14	C2	R20	C1	R96	B1
C36	*C1	D1	*B1	IC15	C1	R21	C1	R97	B1
C37	*C2	D2	*A1	IC16	C1	R22	C1	R98	B1
C38	*C1	D3	*A1	IC17	C1	R23	C1	R99	*B2
C39	*C2	D4	*A1	IC18	*B2	R24	C1	R100	C1
C40	A1	D5	*A1			R25	C1	R101	*C2
C41	A1	D6	C2	L1	C2	R26	C1	R102	*B2
C42	A1	D7	A2	L2	C2	R27	C2	R103	B2
C43	A2	D8	A1	L3	C2	R28	*A2		
C44	A1	D9	A2	L5	C2	R29	C2	RB1	A1
C45	C2	D10	A1			R30	C2	RB2	A1
C46	C2	D11	A1	Q1	*A2	R31	C2	RB3	B2
C47	*C1	D12	*B2	Q2	*A2	R32	C2	RB4	B2
C48	A1	D13	*C2	Q3	*A2	R33	C2	RB5	B2
C49	A2	D14	B1	Q4	C1	R34	C2	RB6	*B2
C50	A2			Q5	*B2	R35	C2	RB7	*A2
C51	A2	E1	C1	Q6	*A2	R36	C2	RB8	*A2
C52	C2			Q7	*B2	R37	C2	RB9	A2
C53	C2	FB1	*B1	Q8	*A2	R38	C2	RB10	A2
C54	B1	FB2	*B1	Q9	*A2	R39	C1	RB11	A1
C55	B1	FB3	*B1	Q10	C1	R40	C2		
C56	B1	FB4	*B1	Q11	C1	R41	C2	*:B SIDE	
C57	B1	FB5	*B1	Q12	A2	R42	C2		
C58	B1	FB6	*B1	Q13	A2	R43	C1		
C59	B1	FB7	*B1	Q14	A2	R44	C2		
C60	B1	FB8	*B1	Q15	A1	R45	C1		
C61	B1	FB9	*B1	Q16	A1	R46	C1		
C62	B1	FB10	*B1	Q17	A1	R47	B1		
C63	B1	FB11	*B1	Q18	A1	R48	B1		
C64	B1	FB12	*B1	Q19	C1	R49	B1		
C65	B1	FB13	*A1	Q20	A2	R50	B1		
C66	*C2	FB14	*A1	Q21	A2	R51	B1		
C67	*C2	FB15	*A1	Q22	A2	R52	C1		
C68	*C2	FB16	*A1	Q23	A1	R53	C1		
C69	*C2	FB17	B1	Q24	A1	R54	C1		
C70	C1	FB18	B1	Q25	A1	R55	C1		

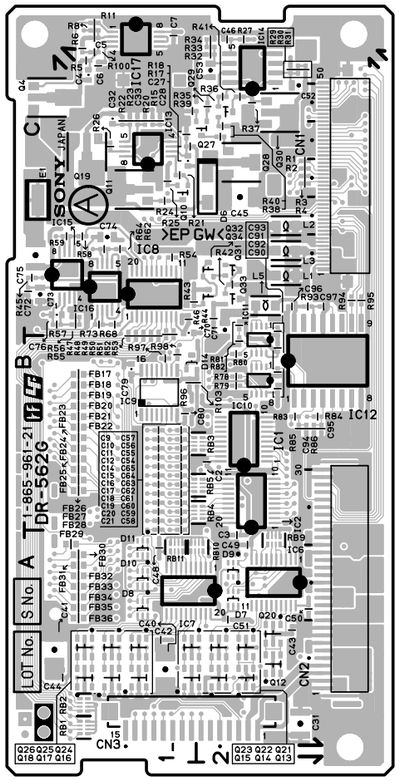


DR-562 -A SIDE-
SUFFIX: -21

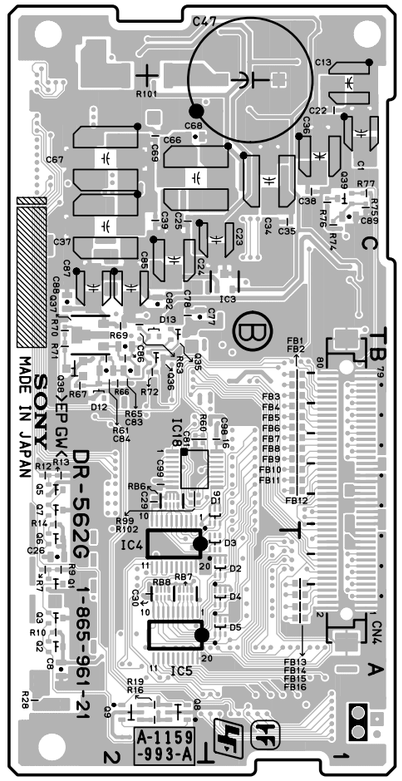


DR-562 -B SIDE-
SUFFIX: -21

FL-337 (1-868-411-11)

C1	A1
C2	A1
C3	B1
CN1	A1
CN2	A1
CN3	B1
FB1	B1
FB2	B1
FB3	B1
L1	A1
L2	A1

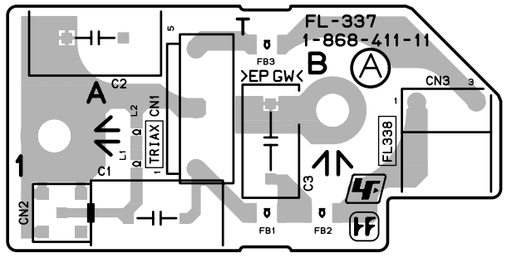


FL-337 -A SIDE-
SUFFIX: -11

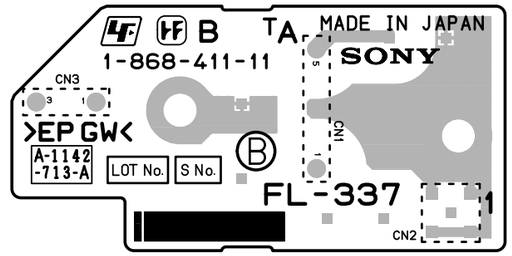


FL-337 -B SIDE-
SUFFIX: -11

FL-338 (1-868-492-11)

C1	A1
C2	A1
C3	B1
CN1	A1
CN2	A1
CN3	B1
CN4	B1
FB1	A1
FB2	B1
FB3	A1
FB4	B1
L1	A1
L2	B1
L3	A1
L4	B1
L5	B1

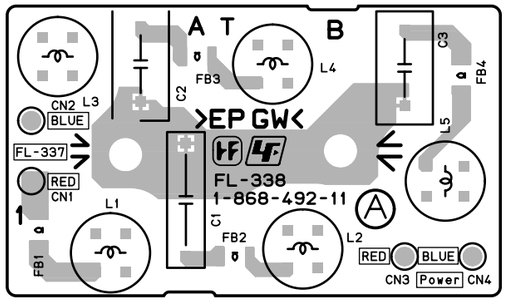

FL-338 -A SIDE-
SUFFIX: -11

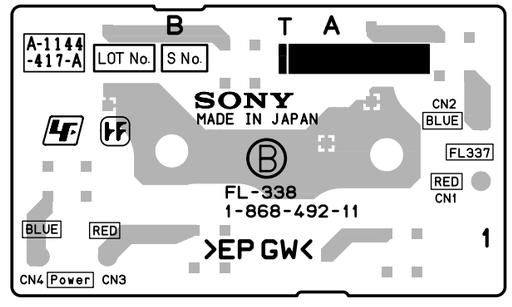


FL-338 -B SIDE-
SUFFIX: -11


LE-291, LE-308, LE-309

LE-291 (1-867-407-11)

C1	A1	D18	*C2	D58	*A2
C2	B1	D19	*C2	D59	*A1
C3	C1	D20	*C2	D60	*A1
C4	B1	D21	*C2	D61	*A1
C5	A2	D22	*C2		
C6	C1	D23	*C1	IC1	B2
C7	B1	D24	*C1	IC2	B1
C8	C2	D25	*C1	IC3	B1
C9	C2	D26	*C1	IC4	C2
C10	C2	D27	*B2		
C11	*B1	D28	*B2	L1	A1
C12	*B1	D29	*C2	L2	B1
C13	*A2	D30	*C2		
C14	*A2	D31	*C2	Q1	*B2
C15	B1	D32	*B2	Q2	*B2
C16	B1	D33	*B2	Q3	*B2
C17	A2	D34	*A2	Q4	*B2
C18	C2	D35	*A2	Q5	*B1
C19	A1	D36	*A2	Q6	*B1
		D37	*A2	Q7	*B1
CN1	A1	D38	*A1	Q8	*B1
CN2	*B2	D39	*A1	Q9	A1
		D40	*A1	Q10	B1
D1	A1	D41	*A1	Q11	B1
D2	*C2	D42	*A1	Q12	B1
D3	*C2	D43	*A1	Q13	*B2
D4	*C1	D44	*A1	Q14	*B2
D5	*C1	D45	*A1	Q15	*B2
D6	*C1	D46	*A1	Q16	*C2
D7	*C2	D47	*A2	Q17	*B2
D8	*C2	D48	*A2	Q18	*B2
D9	*C2	D49	*A2	Q19	*B2
D10	*C2	D50	*A2	Q20	*B2
D11	*C2	D51	*A2	Q21	*B1
D12	*C1	D52	*A2	Q22	*B1
D13	*C1	D53	*A2	Q23	*B1
D14	*C1	D54	*A2	Q24	*B1
D15	*C1	D55	*A2	Q25	A1
D16	*C1	D56	*A2	Q26	B1
D17	*C2	D57	*A2	Q27	B1

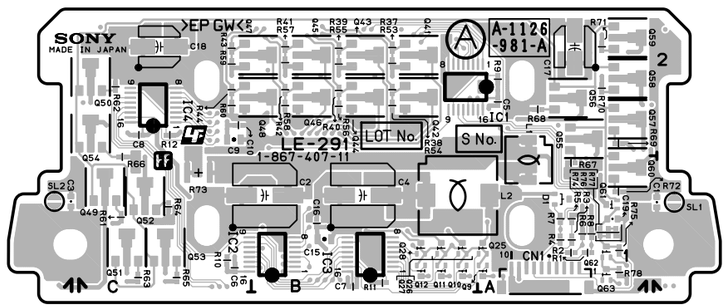


LE-291 -A SIDE-
SUFFIX: -11

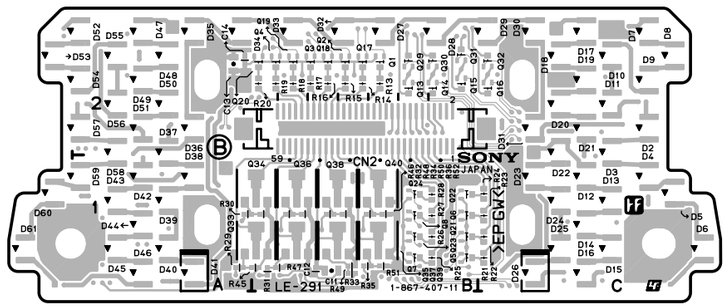


LE-291 -B SIDE-
SUFFIX: -11


Q28	B1	R4	A1	R44	C2
Q29	*B2	R5	A1	R45	*B1
Q30	*B2	R6	A1	R46	*B1
Q31	*B2	R7	A1	R47	*B1
Q32	*C2	R8	A1	R48	*B1
Q33	*B1	R9	A2	R49	*B1
Q34	*B1	R10	C1	R50	*B1
Q35	*B1	R11	B1	R51	*B1
Q36	*B1	R12	C2	R52	*B1
Q37	*B1	R13	*B2	R53	B2
Q38	*B1	R14	*B2	R54	B2
Q39	*B1	R15	*B2	R55	B2
Q40	*B1	R16	*B2	R56	B2
Q41	B2	R17	*B2	R57	B2
Q42	B2	R18	*B2	R58	B2
Q43	B2	R19	*B2	R59	C2
Q44	B2	R20	*B2	R60	C2
Q45	B2	R21	*C1	R61	C1
Q46	B2	R22	*C1	R62	C2
Q47	B2	R23	*C1	R63	C1
Q48	B2	R24	*C1	R64	C1
Q49	C1	R25	*B1	R65	C1
Q50	C2	R26	*B1	R66	C1
Q51	C1	R27	*B1	R67	A1
Q52	C1	R28	*B1	R68	A2
Q53	C1	R29	*A1	R69	A2
Q54	C2	R30	*A1	R70	A2
Q55	A2	R31	*B1	R71	A2
Q56	A2	R32	*B1	R72	A1
Q57	A2	R33	*B1	R73	C1
Q58	A2	R34	*B1	R74	A1
Q59	A2	R35	*B1	R75	A1
Q60	A1	R36	*B1	R76	A1
Q61	A1	R37	B2	R77	A1
Q62	A1	R38	B2	R78	A1
Q63	A1	R39	B2		
		R40	B2	SL1	A1
R1	A1	R41	B2	SL2	C1
R2	A1	R42	B2		
R3	A1	R43	C2	*:B SIDE	




LE-308 -A SIDE-
SUFFIX: -12




LE-308 -B SIDE-
SUFFIX: -12




LE-309 -A SIDE-
SUFFIX: -11



LE-309 -B SIDE-
SUFFIX: -11

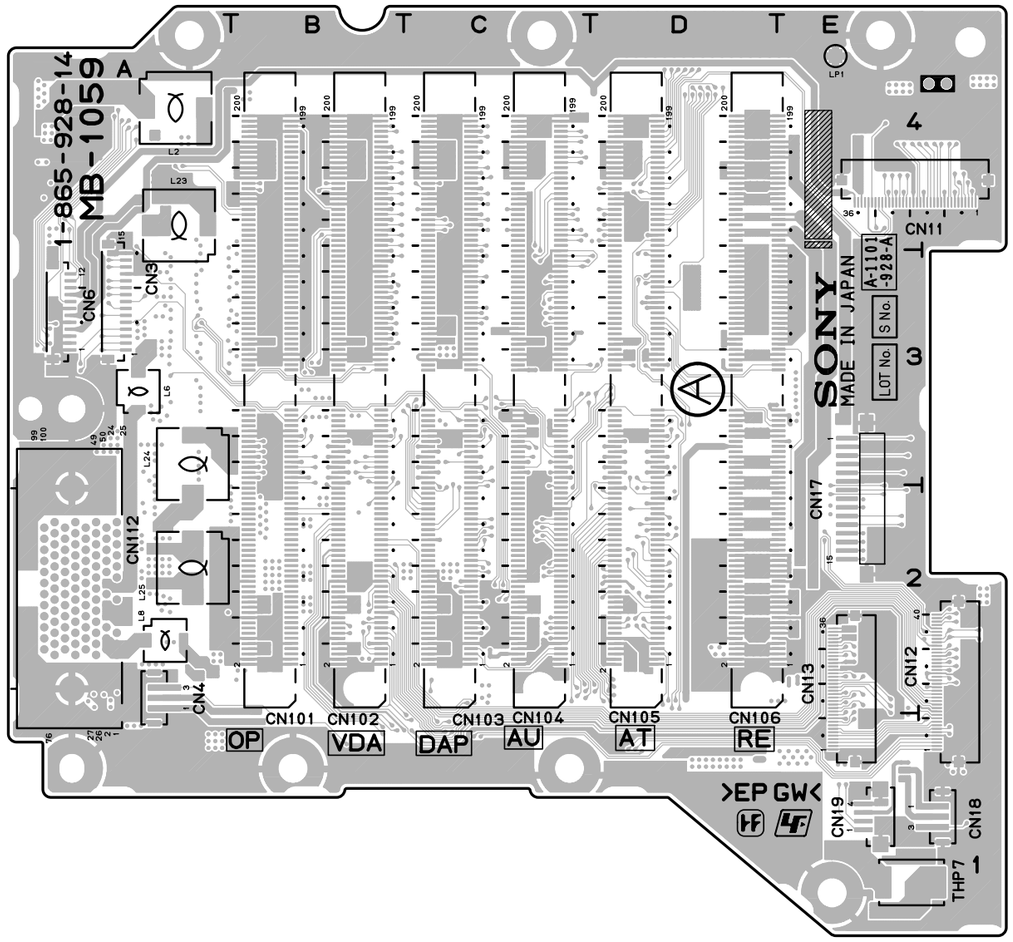


MB-1059 -A SIDE-
SUFFIX: -14

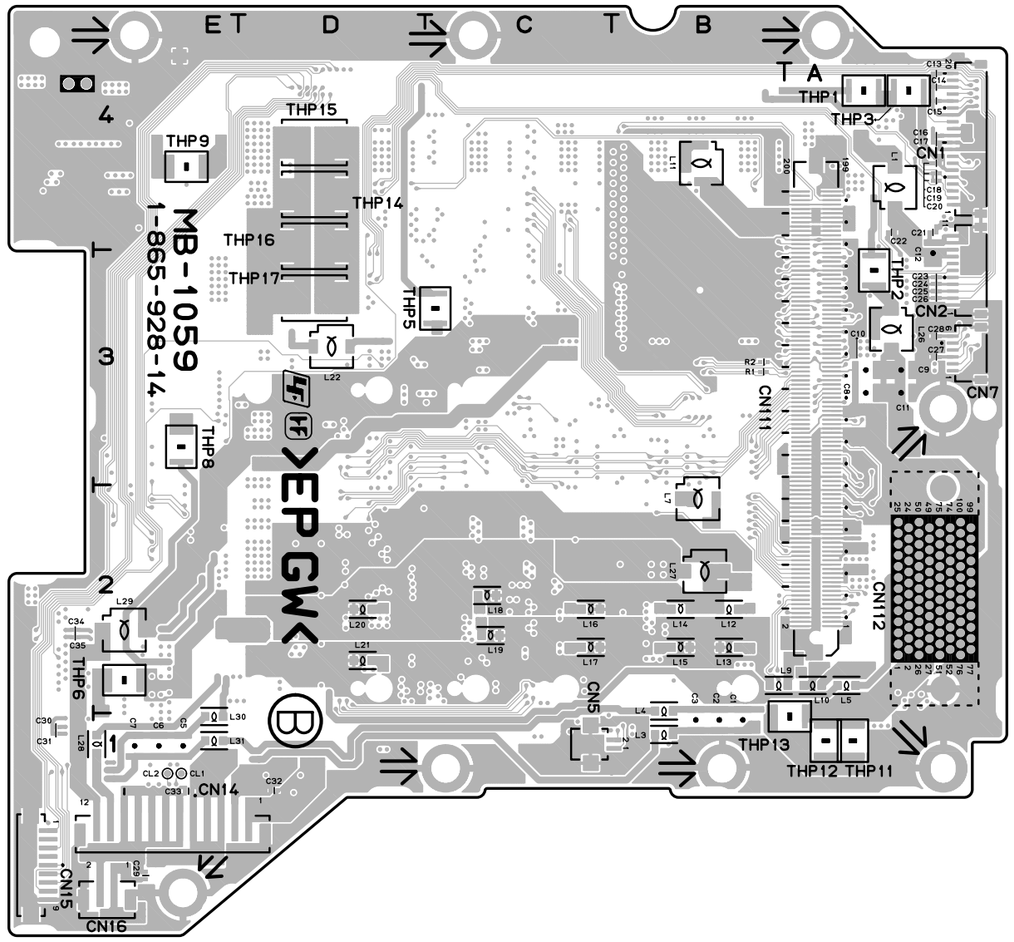


MB-1059 -B SIDE-
SUFFIX: -14

MB-1059 (1-865-928-14)

C1	*B1	C26	*A3	CN14	*E1	L10	*A2	R1	*B3
C2	*B1	C27	*A3	CN15	*E1	L11	*B4	R2	*B3
C3	*B1	C28	*A3	CN16	*E1	L12	*B2		
C5	*E1	C29	*E1	CN17	E2	L13	*B2	SL1	*A3
C6	*E1	C30	*E1	CN18	E1	L14	*B2		
C7	*E1	C31	*E1	CN19	E1	L15	*B2	THP1	*A4
C8	*A3	C32	*D1	CN101	B3	L16	*C2	THP2	*A3
C9	*A3	C33	*E1	CN102	B3	L17	*C2	THP3	*A4
C10	*A3	C34	*E2	CN103	C3	L18	*C2	THP5	*C3
C11	*A3	C35	*E2	CN104	C3	L19	*C2	THP6	*E2
C12	*A3			CN105	D3	L20	*D2	THP7	E1
C13	*A4	CL1	*E1	CN106	D3	L21	*D2	THP8	*E3
C14	*A4	CL2	*E1	CN111	*A3	L22	*D3	THP9	*E4
C15	*A4			CN112	A2	L23	A4	THP11	*A1
C16	*A4	CN1	*A4			L24	A3	THP12	*A1
C17	*A4	CN2	*A3	L1	*A4	L25	A2	THP13	*A1
C18	*A4	CN3	A3	L2	A4	L26	*A3	THP14	*D4
C19	*A4	CN4	A2	L3	*B1	L27	*B2	THP15	*D4
C20	*A4	CN5	*C1	L4	*B2	L28	*E1	THP16	*D4
C21	*A4	CN6	A3	L5	*A2	L29	*E2	THP17	*D3
C22	*A4	CN7	*A3	L6	A3	L30	*E1		
C23	*A3	CN11	E4	L7	*B2	L31	*E1	*:B SIDE	
C24	*A3	CN12	E2	L8	A2				
C25	*A3	CN13	E2	L9	*B2	LP1	E4		

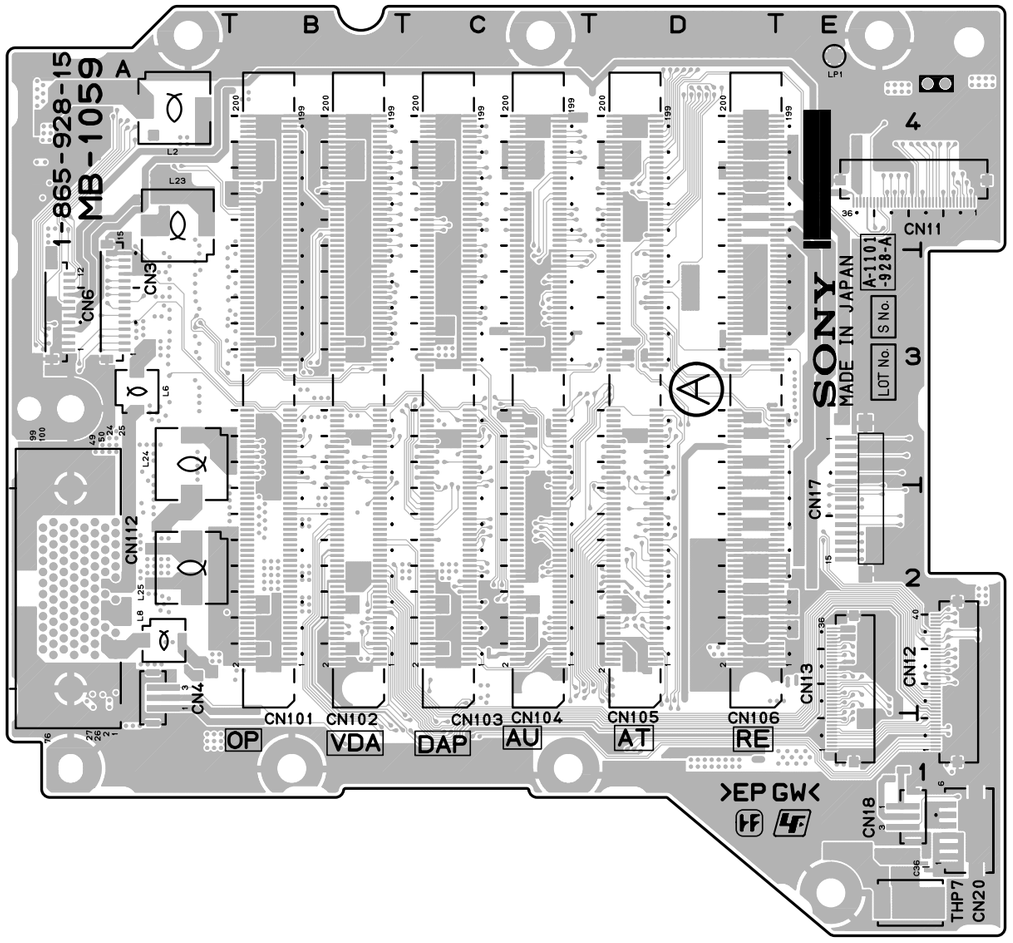

MB-1059 -A SIDE-
SUFFIX: -15

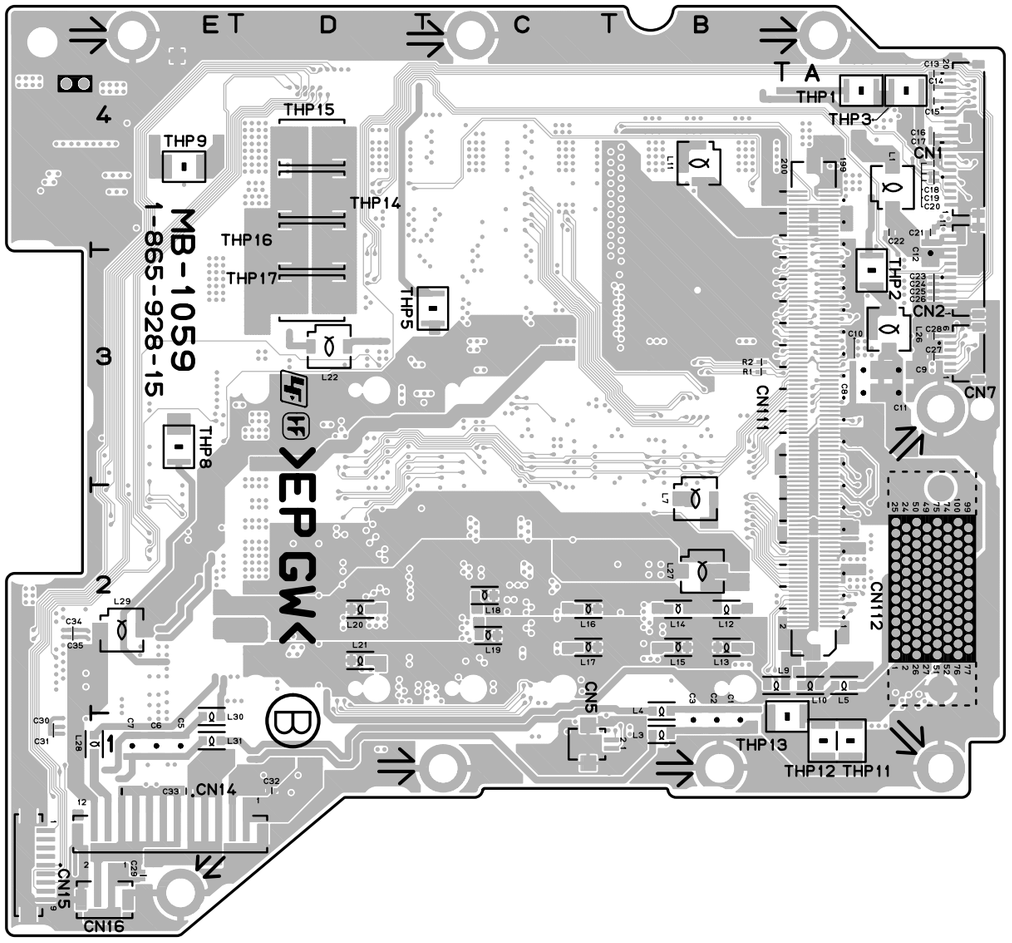


MB-1059 -B SIDE-
SUFFIX: -15

MB-1059 (1-865-928-15)


C1	*B1	C26	*A3	CN16	*E1	L12	*B2	R2	*B3
C2	*B1	C27	*A3	CN17	E2	L13	*B2		
C3	*B1	C28	*A3	CN18	E1	L14	*B2	SL1	*A3
C5	*E1	C29	*E1	CN20	E1	L15	*B2		
C6	*E1	C30	*E1	CN101	B3	L16	*C2	THP1	*A4
C7	*E1	C31	*E1	CN102	B3	L17	*C2	THP2	*A3
C8	*A3	C32	*D1	CN103	C3	L18	*C2	THP3	*A4
C9	*A3	C33	*E1	CN104	C3	L19	*C2	THP5	*C3
C10	*A3	C34	*E2	CN105	D3	L20	*D2	THP7	E1
C11	*A3	C35	*E2	CN106	D3	L21	*D2	THP8	*E3
C12	*A3	C36	E1	CN111	*A3	L22	*D3	THP9	*E4
C13	*A4			CN112	A2	L23	A4	THP11	*A1
C14	*A4	CN1	*A4			L24	A3	THP12	*A1
C15	*A4	CN2	*A3	L1	*A4	L25	A2	THP13	*A1
C16	*A4	CN3	A3	L2	A4	L26	*A3	THP14	*D4
C17	*A4	CN4	A2	L3	*B1	L27	*B2	THP15	*D4
C18	*A4	CN5	*C1	L4	*B2	L28	*E1	THP16	*D4
C19	*A4	CN6	A3	L5	*A2	L29	*E2	THP17	*D3
C20	*A4	CN7	*A3	L6	A3	L30	*E1		
C21	*A4	CN11	E4	L7	*B2	L31	*E1	*:B SIDE	
C22	*A4	CN12	E2	L8	A2				
C23	*A3	CN13	E2	L9	*B2	LP1	E4		
C24	*A3	CN14	*E1	L10	*A2				
C25	*A3	CN15	*E1	L11	*B4	R1	*B3		

MB-1060 (1-867-461-12)

C1	*A5	FB26	*A1	R4	*F4
C2	*B5	FB27	*A1	R5	*F4
C3	*B5			R6	*B2
C4	*B2	FL1	*A3	R7	*B2
C5	*F4	FL2	*A3	R8	*B2
C6	*B2	FL3	*A2	R9	*B2
C7	A5	FL4	A2	R12	*B2
C8	A5	FL5	*A3	R13	*B2
C9	B5	FL6	*A3	R14	*A2
C10	*F5	FL7	A2		
		FL8	A2	RB1	*B2
CN1	B1	FL9	*A3	RB2	*B2
CN2	A5	FL10	*A2	RB3	*F4
CN3	A5	FL11	*A2	RB4	*B2
CN4	C1	FL12	*A2	RB5	*F4
CN5	F3	FL13	*A2	RB6	*B2
CN6	F5	FL14	*A2	RB7	*F4
CN7	A3	FL15	*A3	RB8	*F4
CN8	A2	FL16	*A3	RB9	*B2
CN9	B1	FL17	*A3	RB10	*B2
CN10	*G5	FL18	A2	RB11	*B2
CN11	*C1	FL19	*A2	RB12	*B2
CN13	*G5	FL20	*B2	RB13	*B1
CN14	F4	FL21	*B2	RB14	*B1
CN15	*G5	FL22	*A2	RB15	*B1
CN16	*G5	FL23	*A2	RB16	*B1
CN17	A2	FL24	*A3	RB17	*B1
CN27	*B1	FL25	*A2	RB18	*B1
CN28	D1	FL26	*B2	RB19	*B1
CN29	C1	FL27	*A2	RB20	*B1
CN101	B4	FL28	*B2		
CN102	C4	FL29	*A2	THP1	*D4
CN103	C4	FL30	*A2	THP2	*A5
CN104	D4	FL31	*A3	THP3	*A5
CN105	D4	FL32	*A2		
CN106	E4	FL33	*A2	*:B SIDE	
CN111	*B3				
		IC2	F5		
D1	*C1	IC3	B2		
D2	*C1	IC4	B1		
D3	*A2				
D4	*F5	L1	*B5		
D5	*B2	L2	*B5		
D6	*B1	L3	*B5		
		L4	*B3		
FB1	*A5	L5	*B3		
FB2	*A5	L6	B5		
FB3	*A5	L7	B3		
FB4	*F4	L8	*B2		
FB5	*A4	L9	*B2		
FB6	*A4	L10	*C2		
FB7	*A4	L11	*C2		
FB8	*A4	L12	*C2		
FB9	*A4	L13	*C2		
FB10	*A4	L14	*D2		
FB11	*A5	L15	*D2		
FB12	*F4	L16	*D2		
FB13	*F4	L17	*D2		
FB14	*F4	L18	*D4		
FB15	*F4	L19	G5		
FB16	*F4	L20	G5		
FB17	*F3				
FB18	*F3	Q1	*A4		
FB19	*F3	Q2	*F5		
FB20	*B1	Q3	*F5		
FB21	*A1	Q4	*A2		
FB22	*B1				
FB23	*B1	R1	*A4		
FB24	*B1	R2	*F5		
FB25	*B1	R3	*F5		

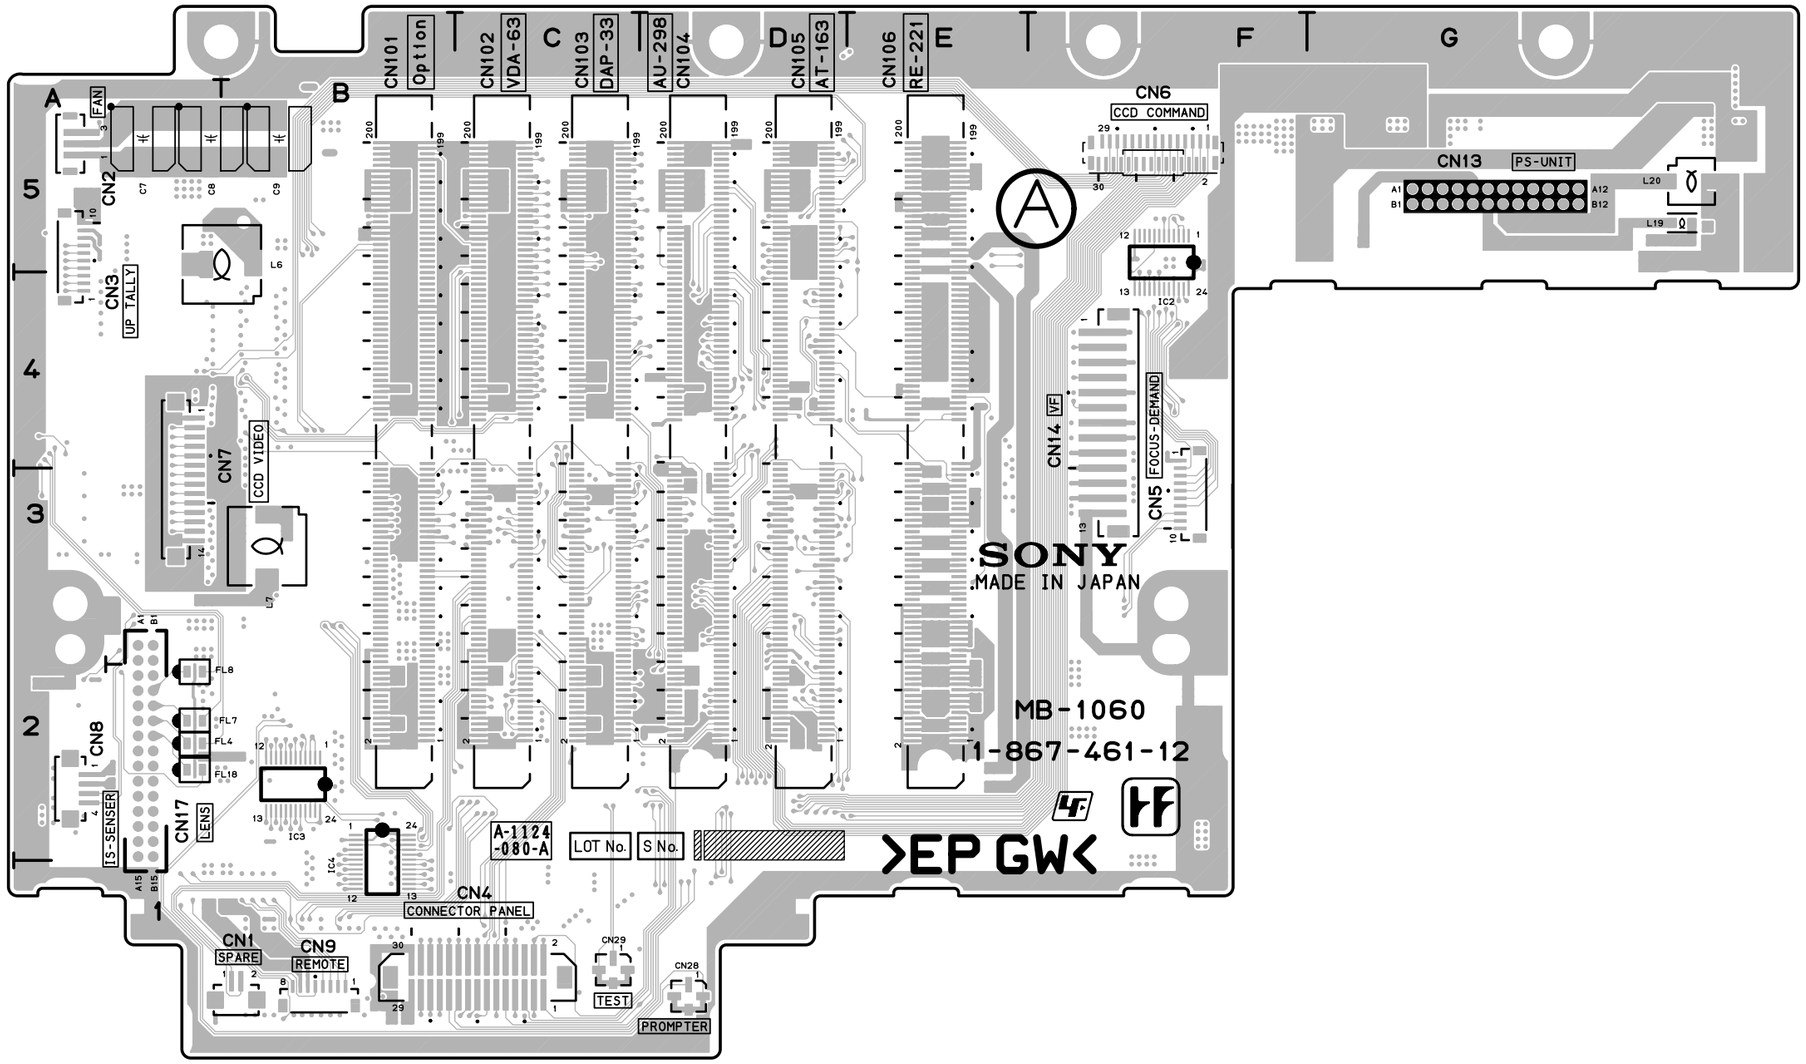


MB-1060 -A SIDE-
SUFFIX: -12

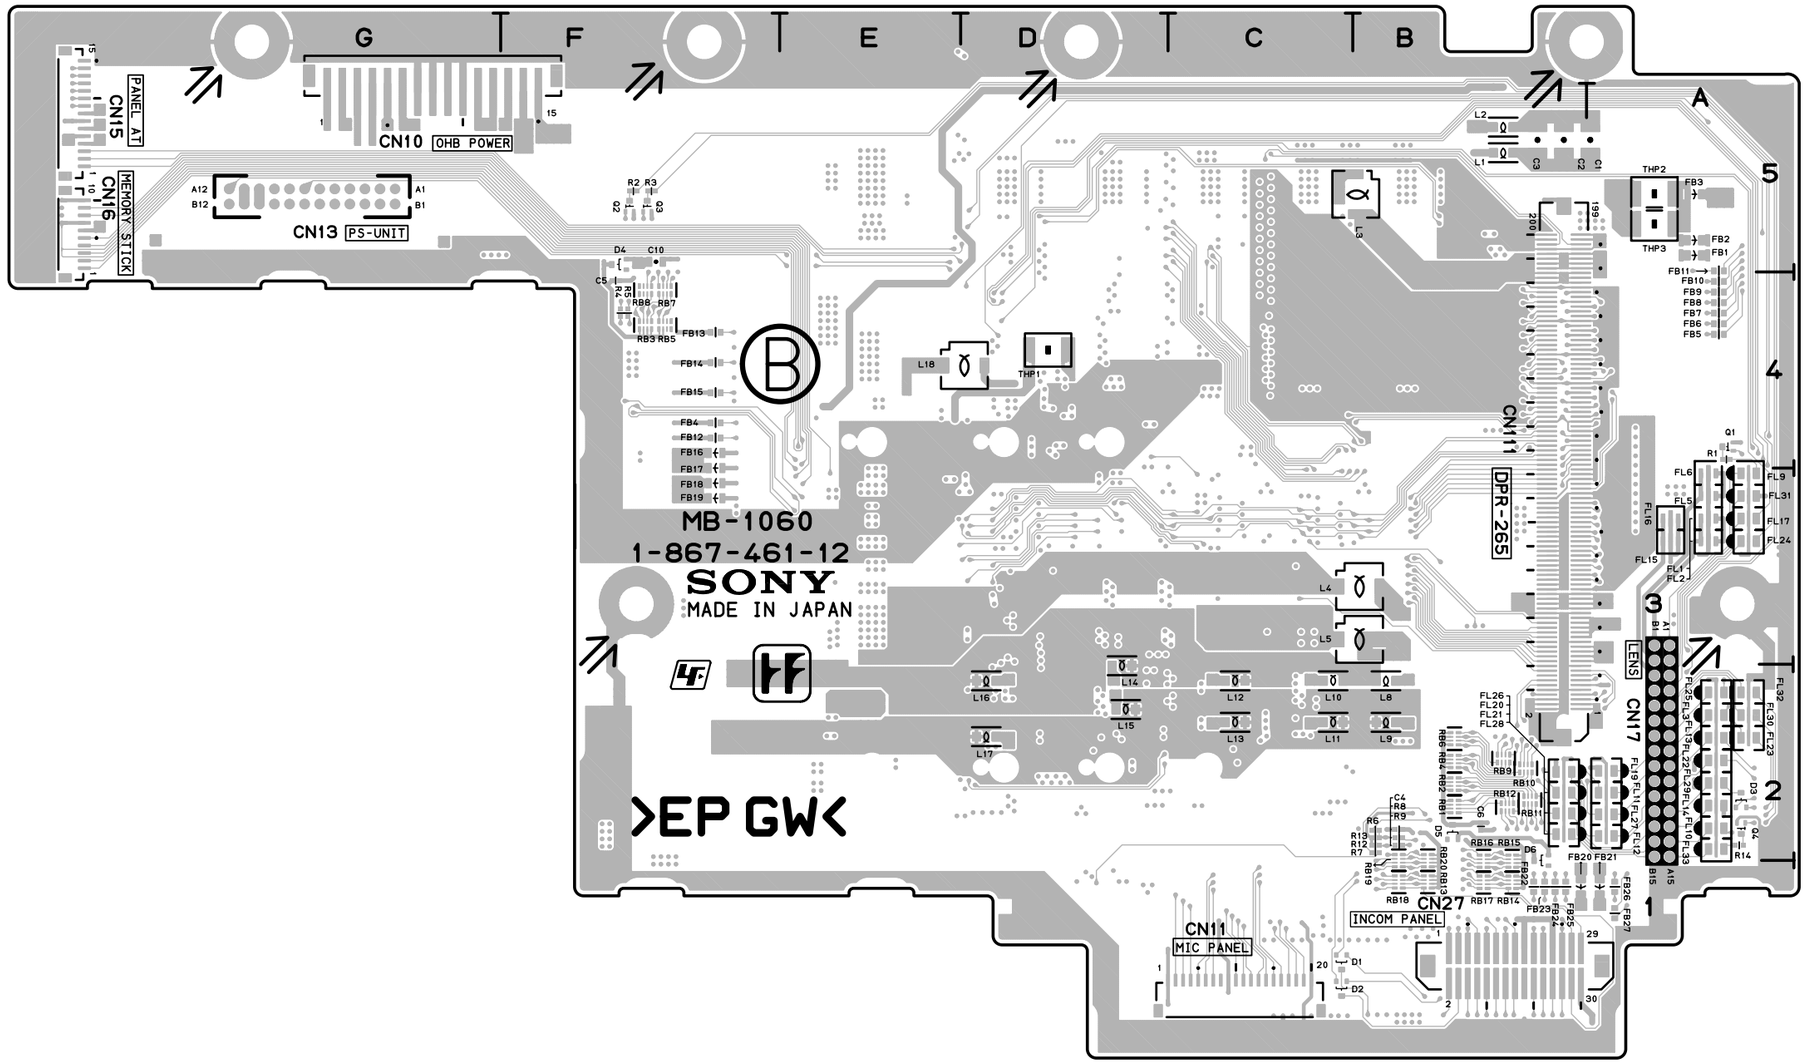


MB-1060 -B SIDE-
SUFFIX: -12

MB-1060 (1-867-461-21)


C1	*A5	FB24	*B1	R2	*F5
C2	*B5	FB25	*B1	R3	*F5
C3	*B5	FB26	*A1	R4	*F4
C4	*B2	FB27	*A1	R5	*F4
C5	*F4			R6	*B2
C6	*B2	FL1	*A3	R7	*B2
C7	A5	FL2	*A3	R8	*B2
C8	A5	FL3	*A2	R9	*B2
C9	B5	FL4	A2	R12	*B2
C10	*F5	FL5	*A3	R13	*B2
		FL6	*A3	R14	*A2
CN1	B1	FL7	A2		
CN2	A5	FL8	A2	RB1	*B2
CN3	A5	FL9	*A3	RB2	*B2
CN4	C1	FL10	*A2	RB3	*F4
CN5	F3	FL11	*A2	RB4	*B2
CN6	F5	FL12	*A2	RB5	*F4
CN7	A3	FL13	*A2	RB6	*B2
CN8	A2	FL14	*A2	RB7	*F4
CN9	B1	FL15	*A3	RB8	*F4
CN10	*G5	FL16	*A3	RB9	*B2
CN11	*C1	FL17	*A3	RB10	*B2
CN13	*G5	FL18	A2	RB11	*B2
CN14	F4	FL19	*A2	RB12	*B2
CN15	*G5	FL20	*B2	RB13	*B1
CN16	*G5	FL21	*B2	RB14	*B1
CN17	A2	FL22	*A2	RB15	*B1
CN27	*B1	FL23	*A2	RB16	*B1
CN28	D1	FL24	*A3	RB17	*B1
CN29	C1	FL25	*A2	RB18	*B1
CN101	B4	FL26	*B2	RB19	*B1
CN102	C4	FL27	*A2	RB20	*B1
CN103	C4	FL28	*B2		
CN104	D4	FL29	*A2	THP1	*D4
CN105	D4	FL30	*A2	THP2	*A5
CN106	E4	FL31	*A3	THP3	*A5
CN111	*B3	FL32	*A2		
CN112	F2	FL33	*A2	*:B SIDE	
D1	*C1	IC2	F5		
D2	*C1	IC3	B2		
D3	*A2	IC4	B1		
D4	*F5				
D5	*B2	L1	*B5		
D6	*B1	L2	*B5		
D7	B1	L3	*B5		
		L4	*B3		
FB1	*A5	L5	*B3		
FB2	*A5	L6	B5		
FB3	*A5	L7	B3		
FB4	*F4	L8	*B2		
FB5	*A4	L9	*B2		
FB6	*A4	L10	*C2		
FB7	*A4	L11	*C2		
FB8	*A4	L12	*C2		
FB9	*A4	L13	*C2		
FB10	*A4	L14	*D2		
FB11	*A5	L15	*D2		
FB12	*F4	L16	*D2		
FB13	*F4	L17	*D2		
FB14	*F4	L18	*D4		
FB15	*F4	L19	G5		
FB16	*F4	L20	G5		
FB17	*F3				
FB18	*F3	Q1	*A4		
FB19	*F3	Q2	*F5		
FB20	*B1	Q3	*F5		
FB21	*A1	Q4	*A2		
FB22	*B1				
FB23	*B1	R1	*A4		

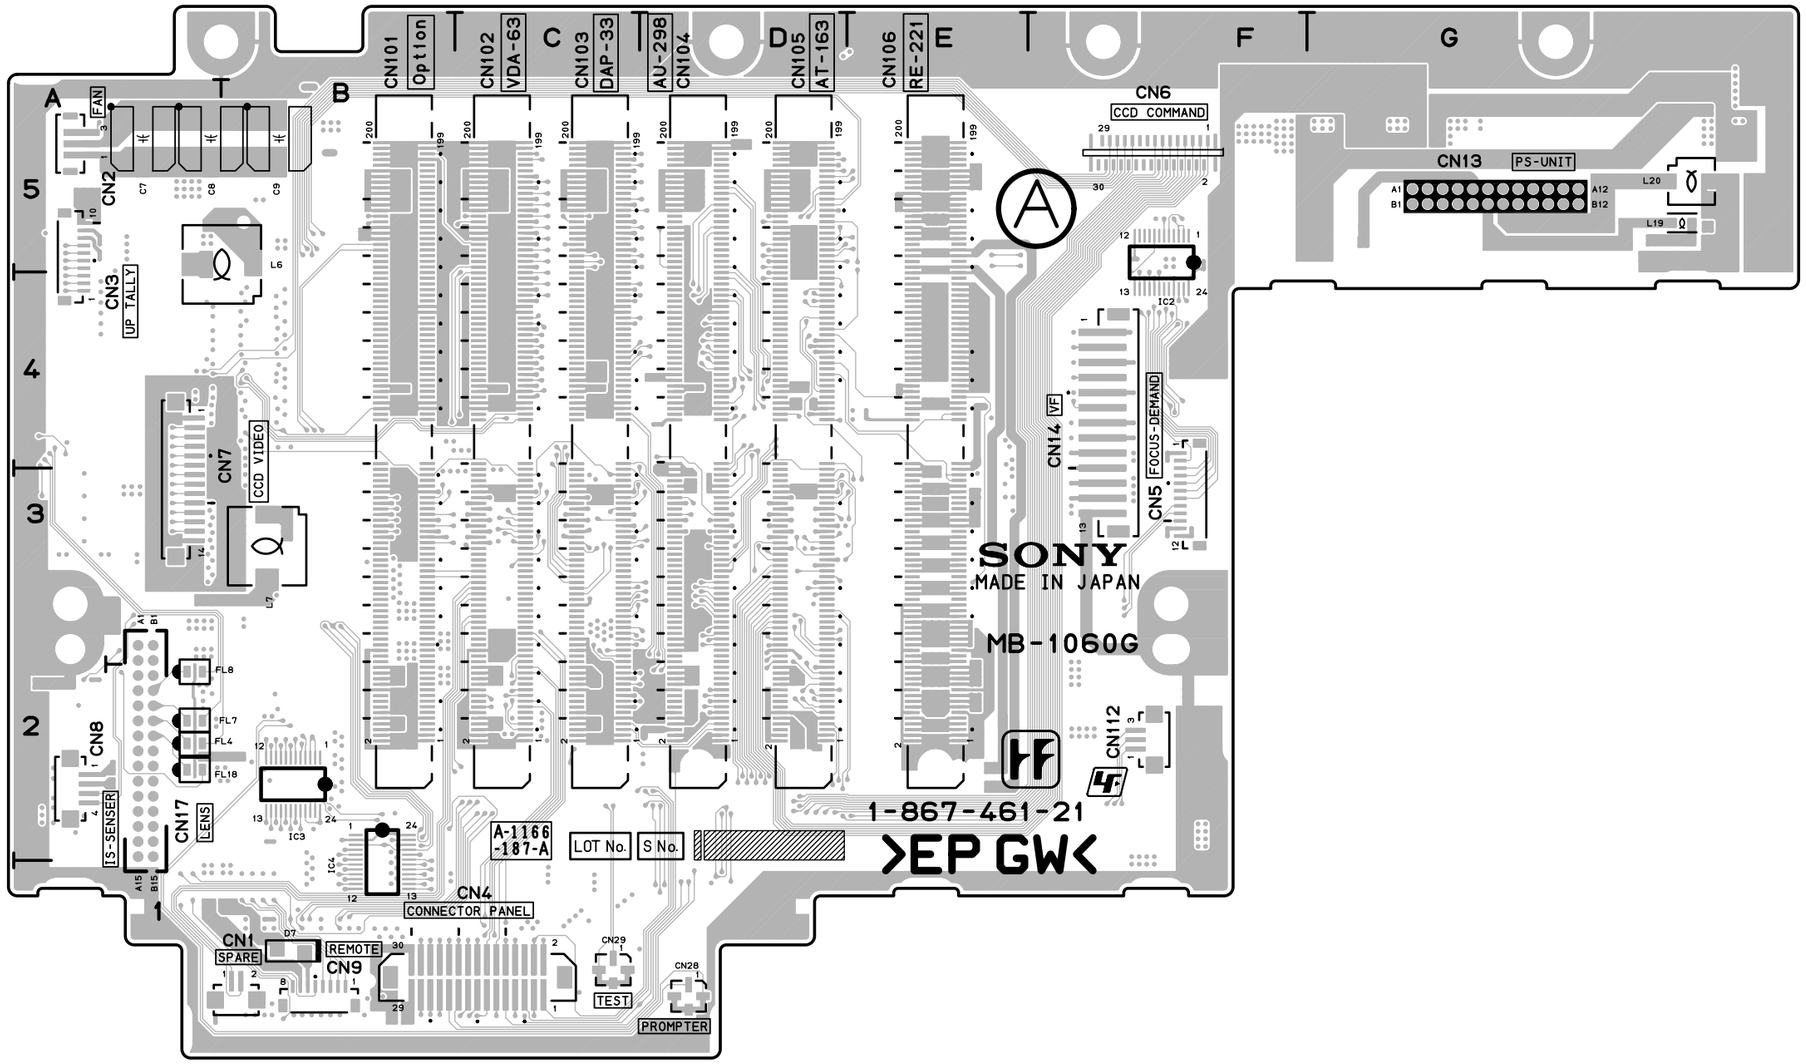


MB-1060 -A SIDE-
SUFFIX: -21

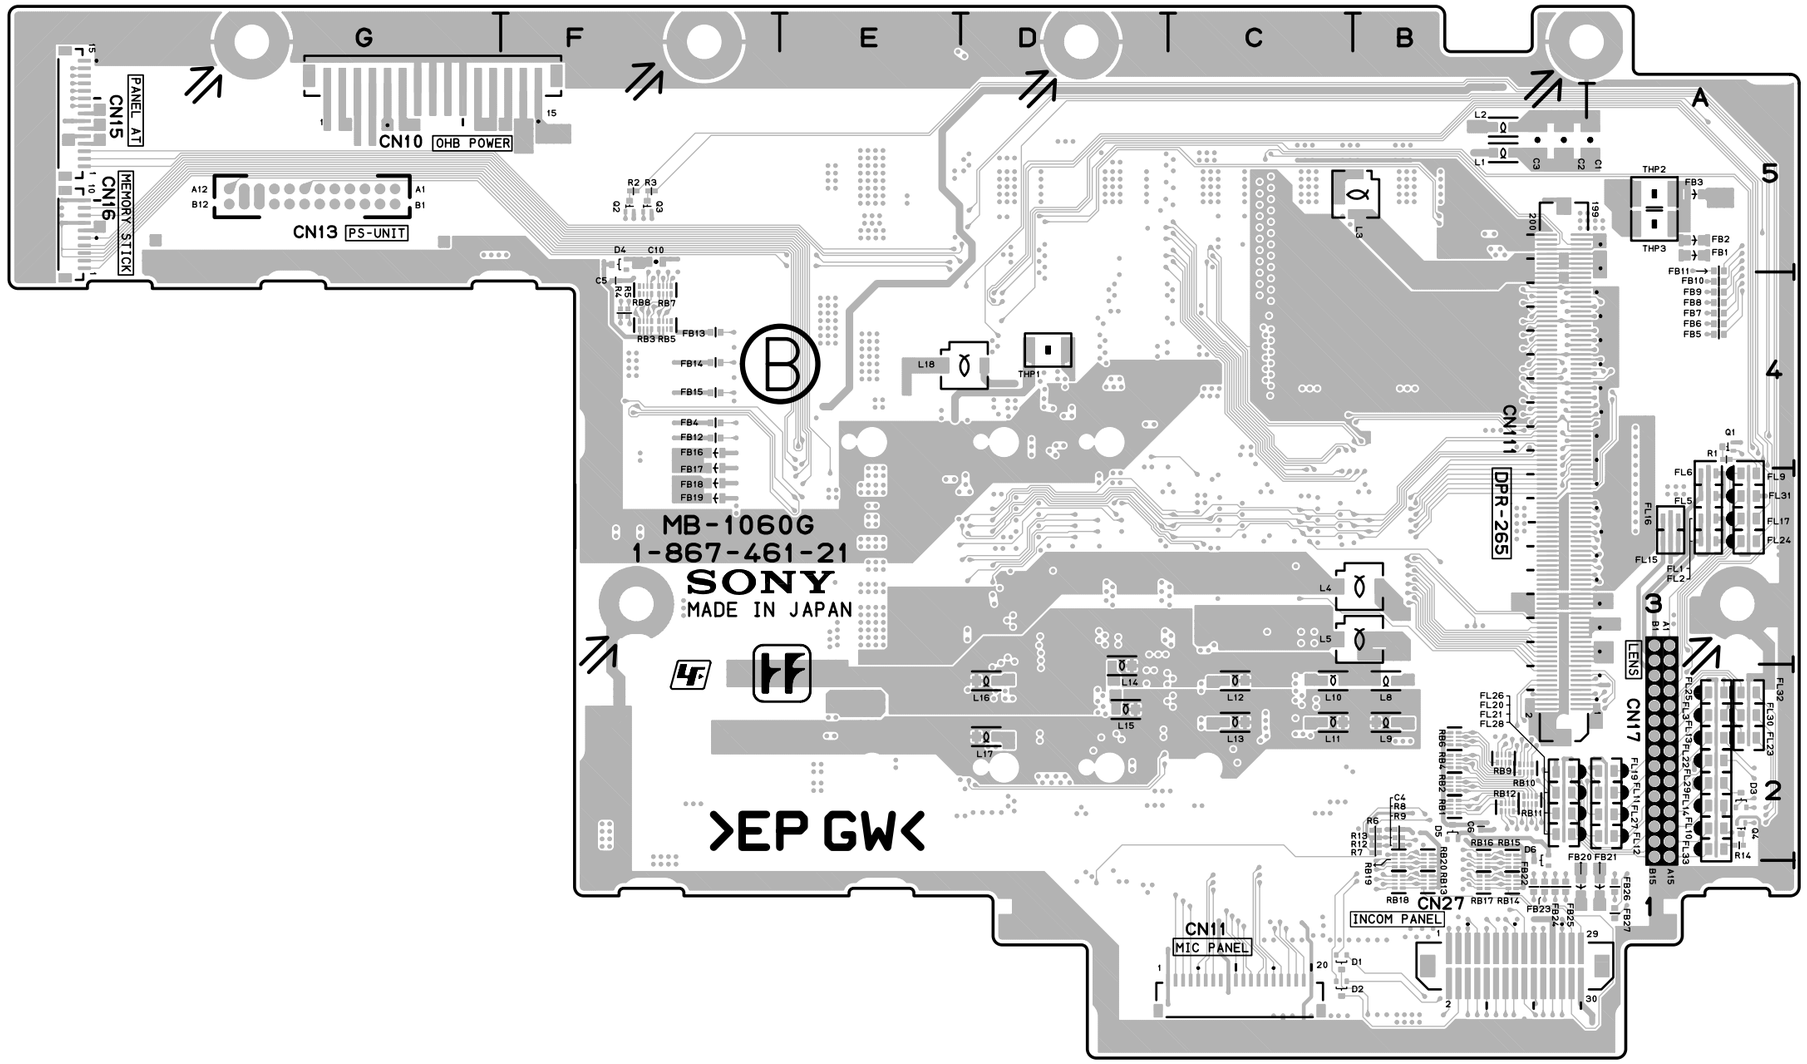

MB-1060 -B SIDE-
SUFFIX: -21

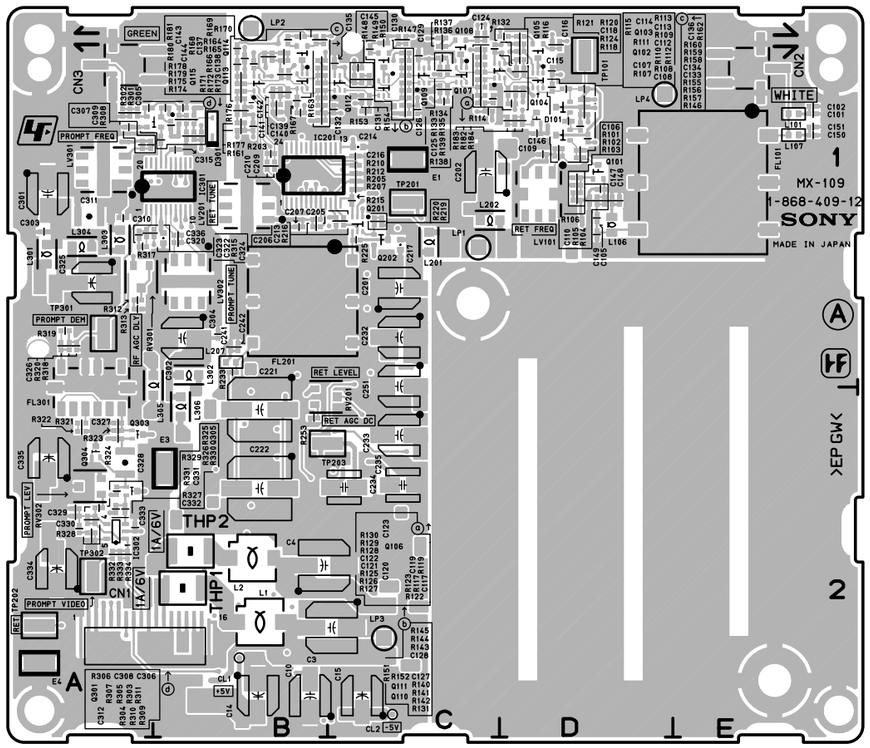

MX-109 -A SIDE-
SUFFIX: -12

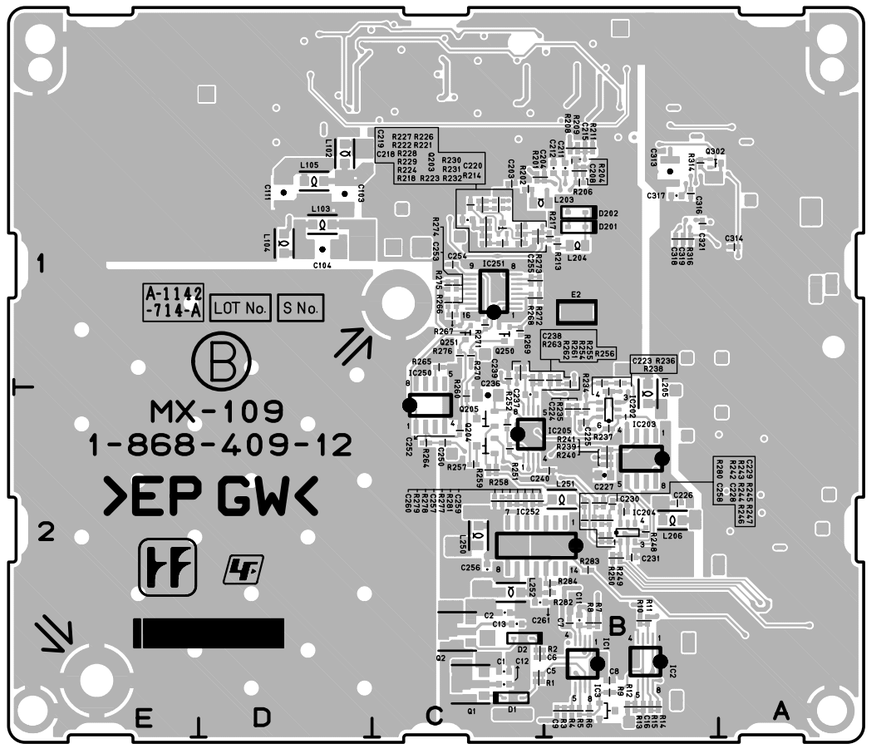


MX-109 -B SIDE-
SUFFIX: -12

MX-109 (1-868-409-12)


C1	*C2	C117	D1	C149	D1	C230	*B2	C308	B1	CN1	A2
C2	*C2	C118	D1	C150	E1	C231	*B2	C309	A1	CN2	E1
C3	C2	C119	D1	C151	E1	C232	C1	C310	A1	CN3	A1
C4	B2	C120	C1	C201	C1	C233	C2	C311	A1		
C5	*C2	C121	C1	C202	C1	C234	C2	C312	B1	D1	*C2
C6	*C2	C122	C1	C203	*C1	C235	C2	C313	*B1	D2	*C2
C7	*B2	C123	C1	C204	*B1	C236	*C2	C314	*A1	D101	D1
C8	*B2	C124	C1	C205	B1	C237	*C2	C315	B1	D201	*B1
C9	*B2	C125	C1	C206	B1	C238	*C1	C316	*B1	D202	*B1
C10	B2	C126	C1	C207	B1	C239	*C1	C317	*B1	D301	B1
C11	*B2	C127	C1	C208	*B1	C240	*B2	C318	*B1		
C12	*C2	C128	C1	C209	B1	C241	B1	C319	*B1	E1	C1
C13	*C2	C129	C1	C210	B1	C242	B1	C320	B1	E2	*B1
C14	B2	C130	C1	C211	*B1	C250	*C2	C321	*B1	E3	B2
C15	C2	C131	C1	C212	*B1	C251	C1	C322	A1	E4	A2
C16	*B2	C132	C1	C213	C1	C252	*C2	C323	A1		
C101	E1	C133	B1	C214	C1	C253	*C1	C324	B1	FL101	E1
C102	E1	C134	B1	C215	*B1	C254	*C1	C325	A1	FL201	B1
C103	*D1	C135	C1	C216	C1	C255	*C1	C326	A1	FL301	A2
C104	*D1	C136	B1	C217	C1	C256	*C2	C327	A2		
C105	D1	C137	B1	C218	*C1	C257	*C2	C328	A2	IC1	*B2
C106	D1	C138	B1	C219	*C1	C258	*B2	C329	A2	IC2	*B2
C107	D1	C139	B1	C220	*C1	C259	*C2	C330	A2	IC3	*B2
C108	D1	C140	B1	C221	B2	C260	*C2	C331	A2	IC201	B1
C109	D1	C141	B1	C222	B2	C261	*C2	C332	A2	IC202	*B2
C110	D1	C142	B1	C223	*B1	C301	A1	C333	A2	IC203	*B2
C111	*D1	C143	B1	C224	*B2	C302	B1	C334	A2	IC204	*B2
C112	D1	C144	B1	C225	*B2	C303	A1	C335	A2	IC205	*C2
C113	D1	C145	C1	C226	*B2	C304	B1	C336	B1	IC250	*C2
C114	D1	C146	D1	C227	*B2	C305	A1			IC251	*C1
C115	D1	C147	D1	C228	*B2	C306	B1	CL1	B2	IC252	*C2
C116	D1	C148	D1	C229	*B2	C307	A1	CL2	C2	IC301	B1
IC302	A2	LV101	D1	Q304	A2	R115	D1	R147	C1	R179	B1	R227	*C1	R259	*C2	R307	B1	THP1	B2
		LV201	B1	Q305	A2	R116	D1	R148	C1	R180	B1	R228	*C1	R260	*C2	R308	A1	THP2	B2
L1	B2	LV301	A1			R117	D1	R149	C1	R181	B1	R229	*C1	R261	*C1	R309	B1		
L2	B2	LV302	B1	R1	*C2	R118	D1	R150	C1	R182	D1	R230	*C1	R262	*C1	R310	B1	TP101	D1
L101	E1			R2	*C2	R119	D1	R151	C1	R183	D1	R231	*C1	R263	*C1	R311	B1	TP201	C1
L102	*D1	Q1	*C2	R3	*B2	R120	D1	R152	C1	R184	D1	R232	*C1	R264	*C2	R312	A1	TP202	A2
L103	*D1	Q2	*C2	R4	*B2	R121	D1	R153	C1	R201	*C1	R233	B1	R265	*C1	R313	A1	TP203	B2
L104	*D1	Q101	D1	R5	*B2	R122	D1	R154	C1	R202	*C1	R234	*B2	R266	*C1	R314	*B1	TP301	A1
L105	*D1	Q102	D1	R6	*B2	R123	D1	R155	B1	R203	B1	R235	*B2	R267	*C1	R315	B1	TP302	A2
L106	D1	Q103	D1	R7	*B2	R124	D1	R156	B1	R204	*B1	R236	*B1	R268	*C1	R316	*B1		
L107	E1	Q104	D1	R8	*B2	R125	C1	R157	B1	R205	C1	R237	*B2	R269	*C1	R317	A1	*:B SIDE	
L201	C1	Q105	D1	R9	*B2	R126	C1	R158	B1	R206	*B1	R238	*B2	R270	*C1	R318	A1		
L202	C1	Q106	D1	R10	*B2	R127	C1	R159	B1	R207	C1	R239	*B2	R271	*C1	R319	A1		
L203	*C1	Q107	C1	R11	*B2	R128	C1	R160	B1	R208	*B1	R240	*B2	R272	*C1	R320	A1		
L204	*B1	Q108	C1	R12	*B2	R129	C1	R161	B1	R209	*B1	R241	*B2	R273	*C1	R321	A2		
L205	*B2	Q109	C1	R13	*B2	R130	C1	R162	B1	R210	C1	R242	*B2	R274	*C1	R322	A2		
L206	*B2	Q110	C1	R14	*B2	R131	C1	R163	B1	R211	*B1	R243	*B2	R275	*C1	R323	A2		
L207	B1	Q111	C1	R15	*B2	R132	C1	R164	B1	R212	C1	R244	*B2	R276	*C1	R324	A2		
L250	*C2	Q112	C1	R101	D1	R133	C1	R165	B1	R213	*B1	R245	*B2	R277	*C2	R325	A2		
L251	*B2	Q113	B1	R102	D1	R134	C1	R166	B1	R214	*C1	R246	*B2	R278	*C2	R326	A2		
L252	*C2	Q114	B1	R103	D1	R135	C1	R167	B1	R215	C1	R247	*B2	R279	*C2	R327	A2		
L301	A1	Q115	B1	R104	D1	R136	C1	R168	B1	R216	C1	R248	*B2	R280	*B2	R328	A2		
L302	B1	Q201	C1	R105	D1	R137	C1	R169	B1	R217	*B1	R249	*B2	R281	*C2	R329	A2		
L303	A1	Q202	C1	R106	D1	R138	C1	R170	B1	R218	*C1	R250	*B2	R282	*B2	R330	A2		
L304	A1	Q203	*C1	R107	D1	R139	C1	R171	B1	R219	C1	R251	*C2	R283	*B2	R331	A2		
L305	B1	Q204	*C2	R108	D1	R140	C1	R172	B1	R220	C1	R252	*C2	R284	*B2	R332	A2		
L306	B2	Q205	*C2	R109	D1	R141	C1	R173	B1	R221	*C1	R253	B2	R301	A1	R333	A2		
		Q250	*C1	R110	D1	R142	C1	R174	B1	R222	*C1	R254	*B1	R302	A1	R334	A2		
LP1	C1	Q251	*C1	R111	D1	R143	C1	R175	B1	R223	*C1	R255	*B1	R303	B1				
LP2	B1	Q301	B1	R112	D1	R144	C1	R176	B1	R224	*C1	R256	*B1	R304	B1	RV201	B2		
LP3	C2	Q302	*B1	R113	D1	R145	C1	R177	B1	R225	C1	R257	*C2	R305	B1	RV301	A1		
LP4	D1	Q303	A2	R114	C1	R146	B1	R178	B1	R226	*C1	R258	*C2	R306	A1	RV302	A2		

PA-317 (1-865-971-14)

C1	C2	C189	C2	C283	B2	C377	A2
C2	C2	C190	*C1	C284	B2	C378	A2
C3	C2	C191	*C1	C285	B2	C379	*A2
C4	B2	C192	*C1	C286	B2	C380	*A2
C5	B2	C193	*C1	C287	B2	C381	*A1
C6	A2	C194	C2	C288	B2	C382	A2
C102	*C1	C195	C2	C289	B2	C383	A2
C103	*C1	C196	*C2	C290	*B1	C384	A2
C104	*C1	C197	C2	C291	*B1	C385	A2
C105	*C1	C198	*C2	C292	*B1	C386	A2
C106	C1	C199	*C1	C293	*B2	C387	A2
C107	C1	C200	*C1	C294	B2	C388	A2
C108	*C1	C202	*B1	C295	B2	C389	A2
C109	*C1	C203	*B1	C296	C2	C390	*A1
C110	C1	C204	*B1	C297	B2	C391	*A1
C111	C1	C205	*B1	C298	*B2	C392	*A1
C112	C1	C206	*B1	C299	*B2	C393	*A2
C113	C1	C207	*B1	C300	*B2	C394	A2
C114	*C1	C208	*B1	C302	*A1	C395	A2
C115	*C1	C209	*B1	C303	*A1	C396	B2
C116	*C1	C210	B1	C304	*A1	C397	A2
C117	*C1	C211	B1	C305	*A1	C398	*A2
C118	*C1	C212	B1	C306	*A1	C399	*A2
C119	C1	C213	B1	C307	*A1	C400	*A2
C120	*C1	C214	B1	C308	A1	C401	*A2
C121	C1	C215	*B1	C309	*A1	C402	*A2
C122	C1	C216	B1	C310	A1	C403	A2
C123	*C1	C217	B1	C311	A1	C404	A2
C124	C1	C218	*B1	C312	A1	C405	A2
C125	C1	C219	B1	C313	A1	C406	A2
C126	C1	C220	*B1	C314	B1	C407	A2
C127	*C1	C221	B1	C315	*A1	C408	A2
C128	*C1	C222	B1	C316	A1	C409	A2
C129	*C1	C223	*B1	C317	B1	C410	A2
C130	*C1	C224	B1	C318	*A1	C411	A2
C131	*C1	C225	B1	C319	A1	C412	A2
C132	C1	C226	*B1	C320	*A1	C413	A2
C133	C1	C227	*B1	C321	A1	C414	A2
C135	*C1	C228	*B1	C322	A1	C415	A2
C136	*C1	C229	*B1	C323	*A1	C416	A2
C137	*C1	C230	*B1	C324	A1	C417	A2
C138	*C1	C231	*B1	C325	A1	C418	A2
C139	C1	C232	B1	C326	*A1	C419	A2
C140	*C1	C233	B1	C327	*A1	C420	B2
C141	*C1	C235	*B1	C328	*A1	C421	*A2
C142	*C1	C236	*B1	C329	*A1	C422	*A2
C143	*C1	C237	*B1	C330	*A1	C423	*C2
C144	*C1	C238	*B1	C331	*A1	C424	*A2
C145	C1	C239	B1	C332	B1	C425	*A2
C146	C1	C240	*B1	C333	A1	C426	*C2
C147	*C1	C241	*B1	C335	*A1	C427	*C2
C148	*C1	C242	*B1	C336	*A1	C428	*B2
C149	C1	C243	*B1	C337	*A1	C429	C2
C150	C1	C244	*B1	C338	*A1	C430	*B2
C151	C1	C245	B1	C339	A1	C431	*B2
C152	C1	C246	B1	C340	*A1	C432	*B2
C153	C1	C247	*B1	C341	*A1	C433	*B2
C154	*C1	C248	*B1	C342	*A1	C434	B2
C155	*C1	C249	B1	C343	*A1	C435	*C2
C156	C1	C250	B1	C344	*A1	C436	*B2
C157	C1	C251	B1	C345	B1	C437	*C2
C158	C1	C252	B1	C346	A1	C438	*B2
C159	C1	C253	B1	C347	*A1	C439	B2
C160	C1	C254	*B1	C348	*A1	C440	*C2
C161	C1	C255	*B1	C349	A1	C441	C2
C162	*C1	C256	B1	C350	A1	C442	*C2
C163	C1	C257	B1	C351	A1	C443	C2
C164	*C1	C258	B1	C352	A1	C444	*C2
C165	C1	C259	B1	C353	A1	C445	*C2
C166	C1	C260	B1	C354	*A1	C446	*C2
C167	C1	C261	B2	C355	*A1	C447	*C2
C168	C1	C262	*B2	C356	A1	C448	*A2
C169	*C1	C263	B1	C357	A1	C449	*A2
C170	C1	C264	*B2	C358	A1	C450	A2
C171	*C1	C265	B1	C359	A1	C452	A2
C172	C1	C266	B1	C360	A1	C453	A2
C173	*C1	C267	B1	C361	A2	C454	A2
C174	*C1	C268	B1	C362	*A2	C455	A2
C175	*C1	C269	*B1	C363	A1	C456	A2
C176	*C1	C270	B1	C364	*A2	C457	A2
C177	C1	C271	*B1	C365	A1	C458	A2
C178	C1	C272	B1	C366	A1	C459	A2
C179	*C1	C273	*B1	C367	A1	C460	A2
C180	*C1	C274	*B1	C368	A1	C461	A2
C181	*C1	C275	*B1	C369	*A1	C462	A2
C182	C2	C276	*B1	C370	A1	C463	A2
C183	C2	C277	B2	C371	*A1	C464	A2
C184	C2	C278	B2	C372	A1	C465	A2
C185	C2	C279	*B2	C373	*A1	C466	A2
C186	C2	C280	*B2	C374	*A1	C467	A2
C187	C2	C281	*B1	C375	*A1	C468	B2
C188	C2	C282	B2	C376	*A1	C469	B2

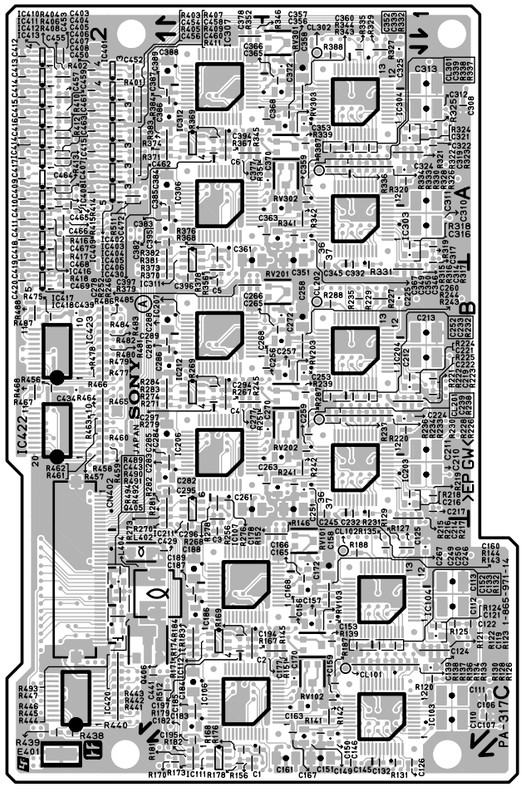

PA-317 -A SIDE-
SUFFIX: -14

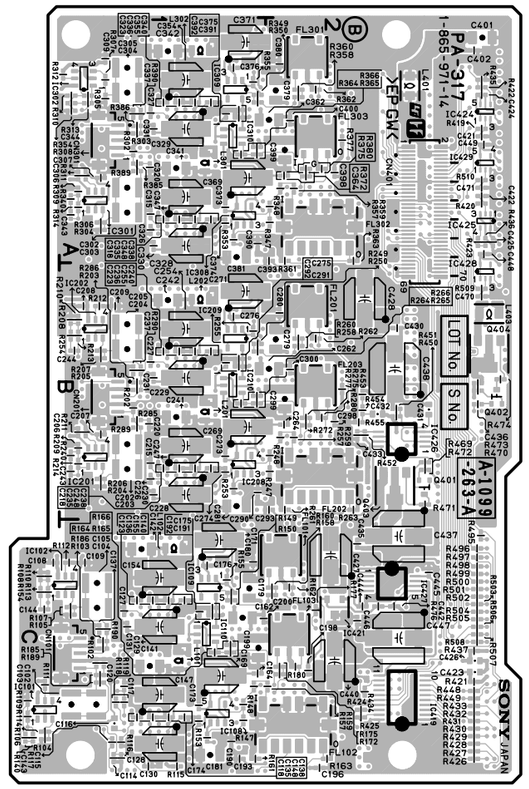


PA-317 -B SIDE-
SUFFIX: -14

C470	*B2	IC104	C1	IC403	A2	L202	*B1	R119	*C1	R151	C1	R183	C2	R226	B1	R258	*B2	R290	*B1
C471	*A2	IC106	C2	IC404	A2	L301	*A1	R120	C1	R152	C1	R184	C2	R227	B1	R259	*B2	R302	*A1
C472	A2	IC107	C2	IC405	A2	L302	*A1	R121	C1	R153	*C1	R185	*C1	R228	B1	R260	*B2	R303	*A1
		IC108	*C1	IC406	A2	L401	*A2	R122	C1	R154	*C1	R186	*C1	R229	B1	R261	*B2	R304	*A1
CL101	C1	IC109	*C1	IC407	A2	L402	C2	R123	C1	R155	*C1	R187	C1	R230	B1	R262	*B2	R305	*A1
CL102	C1	IC110	*C1	IC408	A2	L403	*B2	R124	C1	R156	C2	R188	C1	R231	B1	R263	*B2	R306	*A1
CL201	B1	IC111	C2	IC409	A2	L404	C2	R125	C1	R157	*C1	R189	*C1	R232	B1	R264	*B1	R307	*A1
CL202	B1	IC112	C2	IC410	A2			R126	C1	R158	*C2	R190	*C1	R233	B1	R265	*B1	R308	*A1
CL301	A1	IC201	*B1	IC411	A2	Q401	*B2	R127	C1	R159	*C2	R202	*B1	R234	B1	R266	*B1	R309	*A1
CL302	A1	IC202	*B1	IC412	A2	Q402	*B2	R128	C1	R160	*C2	R203	*B1	R235	B1	R267	B2	R310	*A1
		IC203	B1	IC413	A2	Q403	*B2	R129	C1	R161	*C1	R204	*B1	R236	B1	R268	B2	R311	*A1
CN101	*C1	IC204	B1	IC414	A2	Q404	*B2	R130	C1	R162	*C2	R205	*B1	R237	B1	R269	B2	R312	*A1
CN201	*B1	IC206	B2	IC415	A2	Q405	C2	R131	C1	R163	*C2	R206	*B1	R238	B1	R270	C2	R313	*A1
CN301	*A1	IC207	B2	IC416	A2	Q406	C2	R132	C1	R164	*C1	R207	*B1	R239	B1	R271	B2	R314	*A1
CN401	*A2	IC208	*B1	IC417	A2			R133	C1	R165	*C1	R208	*B1	R240	*B1	R272	*B2	R315	B1
CN402	C2	IC209	*B1	IC418	B2	R102	*C1	R134	C1	R166	*C1	R209	*B1	R241	B1	R273	B2	R316	B1
		IC210	*B1	IC419	*C2	R103	*C1	R135	C1	R167	C2	R210	*B1	R242	B1	R274	B2	R317	B1
E401	C2	IC211	B2	IC420	C2	R104	*C1	R136	C1	R168	C2	R211	*B1	R243	B1	R275	*B2	R318	A1
		IC212	B2	IC421	*C2	R105	*C1	R137	C1	R169	C2	R212	*B1	R244	B1	R276	B2	R319	A1
FL101	*C2	IC301	*A1	IC422	B2	R106	*C1	R138	C1	R170	C2	R213	*B1	R245	B2	R277	*B2	R320	A1
FL102	*C2	IC302	*A1	IC423	B2	R107	*C1	R139	C1	R171	C2	R214	*B1	R246	B2	R278	C2	R321	A1
FL103	*C2	IC303	A1	IC424	*A2	R108	*C1	R140	*C1	R172	*C2	R215	B1	R247	*B2	R279	B2	R322	A1
FL201	*B2	IC304	A1	IC425	*A2	R109	*C1	R141	C1	R173	C2	R216	B1	R248	*B2	R280	*B2	R323	A1
FL202	*B2	IC306	A2	IC426	*B2	R110	*C1	R142	C1	R174	C2	R217	B1	R249	*B1	R281	B2	R324	A1
FL203	*B2	IC307	A2	IC427	*C2	R111	*C1	R143	C1	R175	*C2	R218	B1	R250	*B1	R282	B2	R325	A1
FL301	*A2	IC308	*A1	IC428	*B2	R112	*C1	R144	C1	R176	C2	R219	B1	R251	B2	R283	B2	R326	A1
FL302	*A2	IC309	*A1	IC429	*A2	R113	*C1	R145	C1	R177	*C2	R220	B1	R252	B2	R284	B2	R327	A1
FL303	*A2	IC310	*A1	IC430	A2	R114	*C1	R146	C1	R178	C2	R221	B1	R253	*B1	R285	*B1	R328	A1
		IC311	A2			R115	*C1	R147	*C1	R179	C2	R222	B1	R254	*B1	R286	*B1	R329	A1
IC101	*C1	IC312	A2	L101	*C1	R116	*C1	R148	*C1	R180	*C2	R223	B1	R255	*B1	R287	B1	R330	A1
IC102	*C1	IC401	A2	L102	*C1	R117	*C1	R149	*C1	R181	C2	R224	B1	R256	C2	R288	B1	R331	B1
IC103	C1	IC402	A2	L201	*B1	R118	*C1	R150	*C1	R182	C2	R225	B1	R257	*B2	R289	*B1	R332	A1


R333	A1	R435	*A2																
R334	A1	R436	*A2																
R335	A1	R437	*C2																
R336	A1	R438	C2																
R337	A1	R439	C2																
R338	A1	R440	C2																
R339	A1	R441	C2																
R340	*A1	R442	C2																
R341	A1	R443	C2																
R342	A1	R444	C2																
R343	A1	R445	C2																
R344	A1	R446	C2																
R345	A2	R447	C2																
R346	A2	R448	*C2																
R347	*A2	R449	*C2																
R348	*A2	R450	*B2																
R349	*A1	R451	*B2																
R350	*A1	R452	*B2																
R351	A2	R453	*B2																
R352	A2	R454	*B2																
R353	*A1	R455	*B2																
R354	*A1	R456	B2																
R355	*A1	R457	B2																
R356	B2	R458	B2																
R357	*A2	R459	B2																
R358	*A2	R460	B2																
R359	*A2	R461	B2																
R360	*A2	R462	B2																
R361	*A2	R463	B2																
R362	*A2	R464	B2																
R363	*A2	R465	B2																
R364	*A1	R466	B2																
R365	*A1	R467	B2																
R366	*A1	R468	B2																
R367	A2	R469	*B2																
R368	A2	R470	*B2																
R369	A2	R471	*B2																
R370	B2	R472	*B2																
R371	A2	R473	*B2																
R372	*A2	R474	*B2																
R373	B2	R475	B2																
R374	A2	R476	*C2																
R375	*A2	R477	B2																
R376	A2	R478	B2																
R377	*A2	R479	B2																
R378	B2	R480	B2																
R379	A2	R481	B2																
R380	*A2	R482	B2																
R381	A2	R483	B2																
R382	A2	R484	B2																
R383	A2	R485	B2																
R384	A2	R486	B2																
R385	*A1	R487	B2																
R386	*A1	R488	B2																
R387	A1	R489	C2																
R388	A1	R490	C2																
R389	*A1	R491	C2																
R390	*A1	R492	C2																
R401	A2	R493	C2																
R402	A2	R494	C2																
R403	A2	R495	*C2																
R404	A2	R496	*C2																
R405	A2	R497	*C2																
R406	A2	R498	*C2																
R407	A2	R499	*C2																
R408	A2	R500	*C2																
R409	A2	R501	*C2																
R410	A2	R502	*C2																
R411	A2	R503	*C2																
R412	A2	R504	*C2																
R413	A2	R505	*C2																
R414	A2	R506	*C2																
R415	A2	R507	*C2																
R416	A2	R508	*C2																
R417	A2	R509	*B2																
R418	B2	R510	*A2																
R419	*A2	R511	A2																
R420	*A2	R512	C2																
R421	*C2																		
R422	*A2	RV101	C1																
R423	*A2	RV102	C1																
R424	*C2	RV103	C1																
R425	*C2	RV201	B1																
R426	*C2	RV202	B1																
R427	*C2	RV203	B1																
R428	*C2	RV301	A1																
R429	*C2	RV302	A1																
R430	*C2	RV303	A1																
R431	*C2																		
R432	*C2	*:B SIDE																	
R433	*C2																		
R434	*C2																		

PA-327 (1-865-959-11)

C102	*C1	C241	*B1	C426	*C2	IC412	A2
C103	*C1	C242	B2	C427	*C2	IC413	A2
C104	*C1	C243	B2	C428	*B2	IC414	A2
C105	*C1	C244	B2	C429	C2	IC415	A2
C106	*C1	C245	B2	C430	*B2	IC416	A2
C107	C1	C246	*B1	C431	*B2	IC417	A2
C108	C1	C247	*B2	C432	*B2	IC418	B2
C109	C1	C248	B2	C433	*B2	IC419	*C2
C110	C1	C249	B2	C434	B2	IC420	C2
C111	C1	C250	*B1	C435	*C2	IC421	*C2
C112	C1	C251	*B1	C436	*B2	IC422	B2
C113	*C1	C252	*B1	C437	*C2	IC423	B2
C114	C1	C253	*B1	C438	*B2	IC424	*A2
C115	*C1	C254	B2	C439	B2	IC425	*A2
C116	C1	C302	*A1	C440	*C2	IC426	*B2
C117	*C1	C303	*A1	C441	C2	IC427	*C2
C118	*C1	C304	*A1	C442	*C2		
C119	*C1	C305	*A1	C443	C2	L101	*C1
C120	C1	C306	*A1	C444	*C2	L201	*B1
C121	*C1	C307	A1	C445	*C2	L301	*A1
C122	*C1	C308	A1	C446	*C2	L401	*A2
C123	C1	C309	A1	C447	*C2	L402	C2
C124	*C1	C310	A1	C448	A2	L403	*B2
C125	C1	C311	A1	C449	A2	L404	C2
C126	C1	C312	A1	C450	A2		
C127	*C1	C313	*A1	C451	A2	Q401	*B2
C128	*C1	C314	A1	C452	A2	Q402	*B2
C129	C1	C315	*A1	C453	A2	Q403	*B2
C130	C1	C316	A1	C454	A2	Q404	*B2
C131	C1	C317	*A1	C455	A2	Q405	C2
C132	C1	C318	*A1	C456	A2	Q406	C2
C133	C1	C319	*A1	C457	A2		
C134	*C1	C320	A1	C458	A2	R102	*C1
C135	C1	C321	*A1	C459	A2	R103	*C1
C136	*C1	C322	*A1	C460	A2	R104	*C1
C137	C1	C323	A1	C461	A2	R105	*C1
C138	*C1	C324	*A1	C462	A2	R106	*C1
C139	*C1	C325	A1	C463	A2	R107	*C1
C140	C1	C326	A1	C464	B2	R108	*C1
C141	*C1	C327	*A1	C465	B2	R109	*C1
C142	C2	C328	*A1			R110	*C1
C143	C2	C329	A1	CL101	C1	R111	*C1
C144	C2	C330	A1	CL201	B1	R112	C1
C145	C2	C331	A1	CL301	A1	R113	*C1
C146	*C1	C332	A2	CL401	A2	R114	*C1
C147	*C1	C333	A1	CL402	A2	R115	C1
C148	C2	C334	*A2	CL403	A2	R116	C1
C149	C2	C335	A1	CL404	A2	R117	C1
C150	*C1	C336	*A1	CL405	A2	R118	C1
C151	*C1	C337	A1	CL406	A2	R119	C1
C152	*C1	C338	*A1			R120	C1
C153	*C1	C339	*A1	CN101	*C1	R121	C1
C154	C2	C340	A2	CN201	*B1	R122	C1
C202	*B1	C341	*A1	CN301	*A1	R123	C1
C203	*B1	C342	A2	CN401	*A2	R124	C1
C204	*B1	C343	A2	CN402	C2	R125	C1
C205	*B1	C344	A2			R126	C1
C206	*B1	C345	A2	E401	C2	R127	C1
C207	B1	C346	*A1			R128	C1
C208	B1	C347	*A2	FL101	*C2	R129	C1
C209	B1	C348	A2	FL201	*B2	R130	C1
C210	B1	C349	A2	FL301	*A2	R131	C1
C211	B1	C350	*A1			R132	*C1
C212	B1	C351	*A1	IC101	*C1	R133	*C1
C213	*B1	C352	*A1	IC102	*C1	R134	C1
C214	B1	C353	*A1	IC103	C1	R135	*C1
C215	*B1	C354	A2	IC104	C2	R136	C1
C216	B1	C401	*A2	IC105	*C1	R137	*C1
C217	*B1	C402	*A2	IC106	C2	R138	*C1
C218	*B1	C403	A2	IC201	*B1	R139	*C1
C219	*B1	C404	A2	IC202	*B1	R140	*C2
C220	B1	C405	A2	IC203	B1	R141	C2
C221	*B1	C406	A2	IC204	B2	R142	C2
C222	*B1	C407	A2	IC205	*B1	R143	C2
C223	B1	C408	A2	IC206	B2	R144	C2
C224	*B1	C409	A2	IC301	*A1	R145	C2
C225	B1	C410	A2	IC302	*A1	R146	C2
C226	B1	C411	A2	IC303	A1	R147	C2
C227	*B1	C412	A2	IC304	A2	R148	C2
C228	*B1	C413	A2	IC305	*A1	R149	C2
C229	B1	C414	A2	IC306	A2	R150	*C1
C230	B1	C415	A2	IC401	A2	R151	*C1
C231	B1	C416	A2	IC402	A2	R152	*C1
C232	B2	C417	A2	IC403	A2	R153	*C1
C233	B1	C418	A2	IC404	A2	R154	C2
C234	*B2	C419	A2	IC405	A2	R155	*C1
C235	B1	C420	B2	IC406	A2	R156	*C1
C236	*B1	C421	*A2	IC407	A2	R202	*B1
C237	B1	C422	*A2	IC408	A2	R203	*B1
C238	*B1	C423	*C2	IC409	A2	R204	*B1
C239	*B1	C424	*A2	IC410	A2	R205	*B1
C240	B2	C425	*B2	IC411	A2	R206	*B1

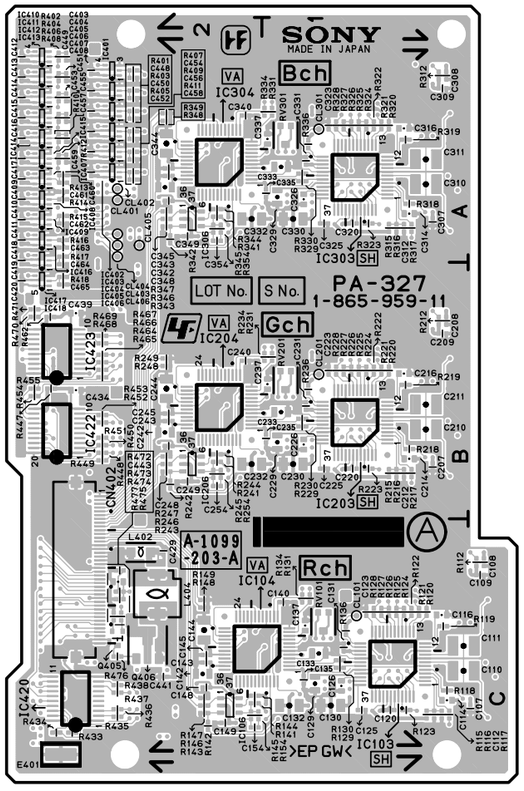

PA-327 -A SIDE-
SUFFIX: -11

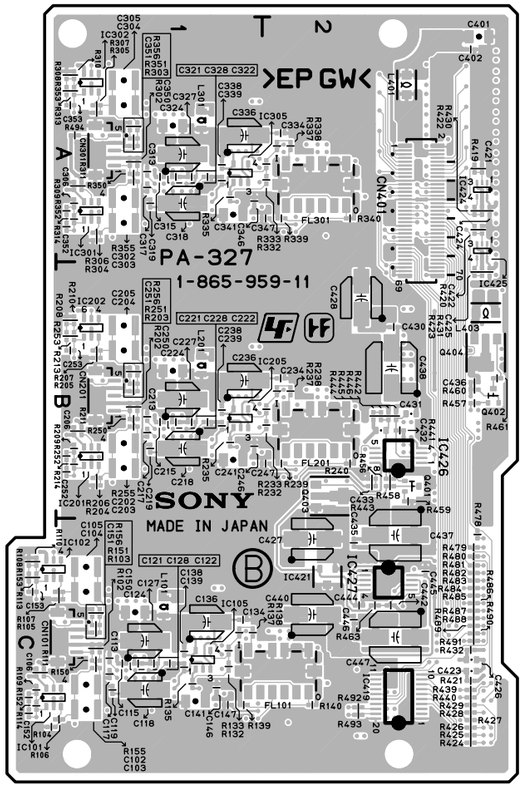


PA-327 -B SIDE-
SUFFIX: -11


R207	*B1	R344	A2	R480	*C2		
R208	*B1	R345	A2	R481	*C2		
R209	*B1	R346	A2	R482	*C2		
R210	*B1	R347	A2	R483	*C2		
R211	*B1	R348	A2	R484	*C2		
R212	B1	R349	A2	R485	*C2		
R213	*B1	R350	*A1	R486	*C2		
R214	*B1	R351	*A1	R487	*C2		
R215	B1	R352	*A1	R488	*C2		
R216	B1	R353	*A1	R489	*C2		
R217	B1	R354	A2	R490	*C2		
R218	B1	R355	*A1	R491	*C2		
R219	B1	R356	*A1	R492	*C2		
R220	B1	R401	A2	R493	*C2		
R221	B1	R402	A2	R494	*A1		
R222	B1	R403	A2				
R223	B1	R404	A2	RV101	C1		
R224	B1	R405	A2	RV201	B1		
R225	B1	R406	A2	RV301	A1		
R226	B1	R407	A2				
R227	B1	R408	A2	*:B SIDE			
R228	B1	R409	A2				
R229	B1	R410	A2				
R230	B1	R411	A2				
R231	B1	R412	A2				
R232	*B2	R413	A2				
R233	*B2	R414	A2				
R234	B1	R415	A2				
R235	*B1	R416	A2				
R236	B1	R417	A2				
R237	*B2	R418	B2				
R238	*B2	R419	*A2				
R239	*B2	R420	*A2				
R240	*B2	R421	*C2				
R241	B2	R422	*A2				
R242	B2	R423	*B2				
R243	B2	R424	*C2				
R244	B2	R425	*C2				
R245	B2	R426	*C2				
R246	B2	R427	*C2				
R247	B2	R428	*C2				
R248	B2	R429	*C2				
R249	B2	R430	*A2				
R250	*B1	R431	*B2				
R251	*B1	R432	*C2				
R252	*B1	R433	C2				
R253	*B1	R434	C2				
R254	B2	R435	C2				
R255	*B1	R436	C2				
R256	*B1	R437	C2				
R302	*A1	R438	C2				
R303	*A1	R439	*C2				
R304	*A1	R440	*C2				
R305	*A1	R441	*B2				
R306	*A1	R442	*B2				
R307	*A1	R443	*B2				
R308	*A1	R444	*B2				
R309	*A1	R445	*B2				
R310	*A1	R446	*B2				
R311	*A1	R447	B2				
R312	A1	R448	B2				
R313	*A1	R449	B2				
R314	*A1	R450	B2				
R315	A1	R451	B2				
R316	A1	R452	B2				
R317	A1	R453	B2				
R318	A1	R454	B2				
R319	A1	R455	B2				
R320	A1	R456	*B2				
R321	A1	R457	*B2				
R322	A1	R458	*B2				
R323	A1	R459	*B2				
R324	A1	R460	*B2				
R325	A1	R461	*B2				
R326	A1	R462	B2				
R327	A1	R463	*C2				
R328	A1	R464	B2				
R329	A1	R465	B2				
R330	A1	R466	B2				
R331	A1	R467	B2				
R332	*A2	R468	B2				
R333	*A2	R469	B2				
R334	A1	R470	B2				
R335	*A1	R471	B2				
R336	A1	R472	C2				
R337	*A2	R473	C2				
R338	*A2	R474	C2				
R339	*A2	R475	C2				
R340	*A2	R476	C2				
R341	A2	R477	C2				
R342	A2	R478	*C2				
R343	A2	R479	*C2				

PA-317 (1-865-971-21)

C1	C2	C188	C2	C281	*B1	C374	*A1
C2	C2	C189	C2	C282	B2	C375	*A1
C3	C2	C190	*C1	C283	B2	C376	*A1
C4	B2	C191	*C1	C284	B2	C377	A2
C5	B2	C192	*C1	C285	B2	C378	A2
C6	A2	C193	*C1	C286	B2	C379	*A2
C101	*C2	C194	C2	C287	B2	C380	*A2
C102	*C2	C195	C2	C288	B2	C381	*A1
C103	*C2	C196	*C2	C289	B2	C382	A2
C104	C1	C197	C2	C290	*B1	C383	A2
C105	C1	C198	*C2	C291	*B1	C384	A2
C106	*C1	C199	*C1	C292	*B1	C385	A2
C107	*C1	C200	*C1	C293	*B2	C386	A2
C108	*C1	C201	*B2	C294	B2	C387	A2
C109	*C1	C202	*B2	C295	B2	C388	A2
C110	C1	C203	*B2	C296	C2	C389	A2
C111	C1	C204	B1	C297	B2	C390	*A1
C112	C1	C205	B1	C298	*B2	C391	*A1
C113	C1	C206	*B1	C299	*B2	C392	*A1
C114	*C1	C207	*B1	C300	*B2	C393	*A2
C115	*C1	C208	*B1	C301	*A2	C394	A2
C116	*C1	C209	*B1	C302	*A2	C395	A2
C117	*C1	C210	B1	C303	*A2	C396	B2
C118	*C1	C211	B1	C304	A1	C397	A2
C119	C1	C212	B1	C305	A1	C398	*A2
C120	*C1	C213	B1	C306	*A1	C399	*A2
C121	C1	C214	B1	C307	*A1	C400	*A2
C122	C1	C215	*B1	C308	*A1	C401	*A2
C123	*C1	C216	B1	C309	*A1	C402	*A2
C124	C1	C217	B1	C310	A1	C403	A2
C125	C1	C218	*B1	C311	A1	C404	A2
C126	C1	C219	B1	C312	A1	C405	A2
C127	*C1	C220	*B1	C313	A1	C406	A2
C128	*C1	C221	B1	C314	B1	C407	A2
C129	*C1	C222	B1	C315	*A1	C408	A2
C130	*C1	C223	*B1	C316	A1	C409	A2
C131	*C1	C224	B1	C317	B1	C410	A2
C132	C1	C225	B1	C318	*A1	C411	A2
C133	C1	C226	*B1	C319	A1	C412	A2
C135	*C1	C227	*B1	C320	*A1	C413	A2
C136	*C1	C228	*B1	C321	A1	C414	A2
C137	C1	C229	*B1	C322	A1	C415	A2
C138	*C1	C230	*B1	C323	*A1	C416	A2
C139	C1	C231	*B1	C324	A1	C417	A2
C140	*C1	C232	B1	C325	A1	C418	A2
C141	*C1	C233	B1	C326	*A1	C419	A2
C142	*C1	C235	*B1	C327	*A1	C420	B2
C143	*C1	C236	*B1	C328	*A1	C421	*A2
C144	*C1	C237	B1	C329	*A1	C422	*A2
C145	C1	C238	*B1	C330	*A1	C423	*C2
C146	C1	C239	B1	C331	*A1	C424	*A2
C147	*C1	C240	*B1	C332	B1	C425	*A2
C148	*C1	C241	*B1	C333	A1	C426	*C2
C149	C1	C242	*B1	C335	*A1	C427	*C2
C150	C1	C243	*B1	C336	*A1	C428	*B2
C151	C1	C244	*B1	C337	A1	C429	C2
C152	C1	C245	B1	C338	*A1	C430	*B2
C153	C1	C246	B1	C339	A1	C431	*B2
C154	*C1	C247	*B1	C340	*A1	C432	*B2
C155	*C1	C248	*B1	C341	*A1	C433	*B2
C156	C1	C249	B1	C342	*A1	C434	B2
C157	C1	C250	B1	C343	*A1	C435	*C2
C158	C1	C251	B1	C344	*A1	C436	*B2
C159	C1	C252	B1	C345	B1	C437	*C2
C160	C1	C253	B1	C346	A1	C438	*B2
C161	C1	C254	*B1	C347	*A1	C439	B2
C162	*C1	C255	*B1	C348	*A1	C440	*C2
C163	C1	C256	B1	C349	A1	C441	C2
C164	*C1	C257	B1	C350	A1	C442	*C2
C165	C1	C258	B1	C351	A1	C443	C2
C166	C1	C259	B1	C352	A1	C444	*C2
C167	C1	C260	B1	C353	A1	C445	*C2
C168	C1	C261	B2	C354	*A1	C446	*C2
C169	*C1	C262	*B2	C355	*A1	C447	*C2
C170	C1	C263	B1	C356	A1	C448	*A2
C171	*C1	C264	*B2	C357	A1	C449	*A2
C172	C1	C265	B1	C358	A1	C450	A2
C173	*C1	C266	B1	C359	A1	C452	A2
C174	*C1	C267	B1	C360	A1	C453	A2
C175	*C1	C268	B1	C361	A2	C454	A2
C176	*C1	C269	*B1	C362	*A2	C455	A2
C177	C1	C270	B1	C363	A1	C456	A2
C178	C1	C271	*B1	C364	*A2	C457	A2
C179	*C1	C272	B1	C365	A1	C458	A2
C180	*C1	C273	*B1	C366	A1	C459	A2
C181	*C1	C274	*B1	C367	A1	C460	A2
C182	C2	C275	*B1	C368	A1	C461	A2
C183	C2	C276	*B1	C369	*A1	C462	A2
C184	C2	C277	B2	C370	A1	C463	A2
C185	C2	C278	B2	C371	*A1	C464	A2
C186	C2	C279	*B2	C372	A1	C465	A2
C187	C2	C280	*B2	C373	*A1	C466	A2

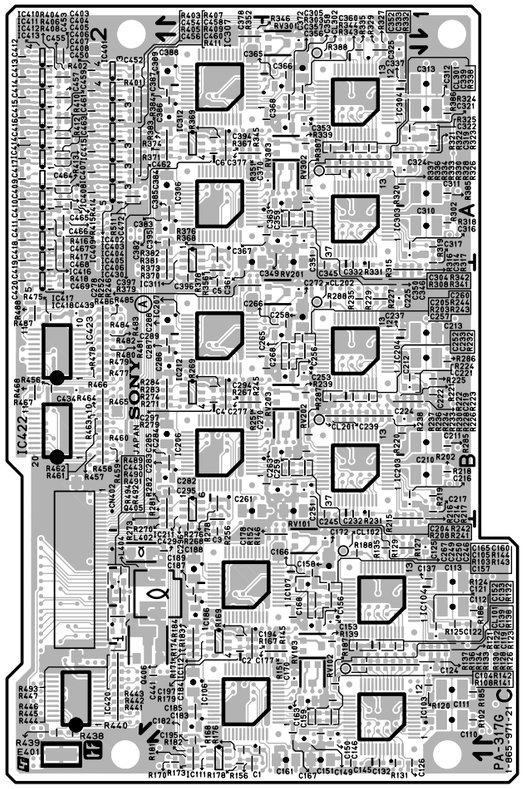

PA-317 -A SIDE-
SUFFIX: -21

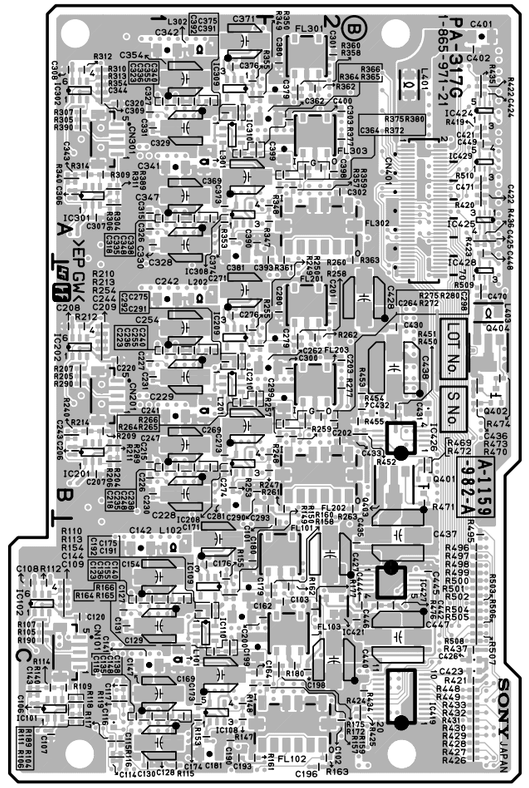


PA-317 -B SIDE-
SUFFIX: -21

C467	A2	IC101	*C1	IC312	A2	L101	*C1	R116	*C1	R148	*C1	R180	*C2	R223	B1	R255	*B1	R287	B1
C468	B2	IC102	*C1	IC401	A2	L102	*C1	R117	*C1	R149	*C1	R181	C2	R224	B1	R256	C2	R288	B1
C469	B2	IC103	C1	IC402	A2	L201	*B1	R118	*C1	R150	*C1	R182	C2	R225	B1	R257	*B2	R289	*B1
C470	*B2	IC104	C1	IC403	A2	L202	*B1	R119	*C1	R151	C1	R183	C2	R226	B1	R258	*B2	R290	*B1
C471	*A2	IC106	C2	IC404	A2	L301	*A1	R120	C1	R152	C1	R184	C2	R227	B1	R259	*B2	R302	A1
C472	A2	IC107	C2	IC405	A2	L302	*A1	R121	C1	R153	*C1	R185	C1	R228	B1	R260	*B2	R303	A1
		IC108	*C1	IC406	A2	L401	*A2	R122	C1	R154	*C1	R186	C1	R229	B1	R261	*B2	R304	*A1
CL101	C1	IC109	*C1	IC407	A2	L402	C2	R123	C1	R155	*C1	R187	C1	R230	B1	R262	*B2	R305	*A1
CL102	C1	IC110	*C1	IC408	A2	L403	*B2	R124	C1	R156	C2	R188	C1	R231	B1	R263	*B2	R306	*A1
CL201	B1	IC111	C2	IC409	A2	L404	C2	R125	C1	R157	*C1	R189	*C1	R232	B1	R264	*B1	R307	*A1
CL202	B1	IC112	C2	IC410	A2			R126	C1	R158	*C2	R190	*C1	R233	B1	R265	*B1	R308	A1
CL301	A1	IC201	*B1	IC411	A2	Q401	*B2	R127	C1	R159	*C2	R202	B1	R234	B1	R266	*B1	R309	*A1
CL302	A1	IC202	*B1	IC412	A2	Q402	*B2	R128	C1	R160	*C2	R203	B1	R235	B1	R267	B2	R310	*A1
		IC203	B1	IC413	A2	Q403	*B2	R129	C1	R161	*C1	R204	*B1	R236	B1	R268	B2	R311	*A1
CN101	*C1	IC204	B1	IC414	A2	Q404	*B2	R130	C1	R162	*C2	R205	*B1	R237	B1	R269	B2	R312	*A1
CN201	*B1	IC206	B2	IC415	A2	Q405	C2	R131	C1	R163	*C2	R206	*B1	R238	B1	R270	C2	R313	*A1
CN301	*A1	IC207	B2	IC416	A2	Q406	C2	R132	C1	R164	*C1	R207	*B1	R239	B1	R271	B2	R314	*A1
CN401	*A2	IC208	*B1	IC417	A2			R133	C1	R165	*C1	R208	B1	R240	*B1	R272	*B2	R315	B1
CN402	C2	IC209	*B1	IC418	B2	R102	C1	R134	C1	R166	*C1	R209	*B1	R241	B1	R273	B2	R316	B1
		IC210	*B1	IC419	*C2	R103	C1	R135	C1	R167	C2	R210	*B1	R242	B1	R274	B2	R317	B1
E401	C2	IC211	B2	IC420	C2	R104	*C1	R136	C1	R168	C2	R211	*B1	R243	B1	R275	*B2	R318	A1
		IC212	B2	IC421	*C2	R105	*C1	R137	C1	R169	C2	R212	*B1	R244	B1	R276	B2	R319	A1
FL101	*C2	IC301	*A1	IC422	B2	R106	*C1	R138	C1	R170	C2	R213	*B1	R245	B2	R277	*B2	R320	A1
FL102	*C2	IC302	*A1	IC423	B2	R107	*C1	R139	C1	R171	C2	R214	*B1	R246	B2	R278	C2	R321	A1
FL103	*C2	IC303	A1	IC424	*A2	R108	C1	R140	*C1	R172	*C2	R215	B1	R247	*B2	R279	B2	R322	A1
FL201	*B2	IC304	A1	IC425	*A2	R109	*C1	R141	C1	R173	C2	R216	B1	R248	*B2	R280	*B2	R323	A1
FL202	*B2	IC306	A2	IC426	*B2	R110	*C1	R142	C1	R174	C2	R217	B1	R249	*B1	R281	B2	R324	A1
FL203	*B2	IC307	A2	IC427	*C2	R111	*C1	R143	C1	R175	*C2	R218	B1	R250	*B1	R282	B2	R325	A1
FL301	*A2	IC308	*A1	IC428	*B2	R112	*C1	R144	C1	R176	C2	R219	B1	R251	B2	R283	B2	R326	A1
FL302	*A2	IC309	*A1	IC429	*A2	R113	*C1	R145	C1	R177	*C2	R220	B1	R252	B2	R284	B2	R327	A1
FL303	*A2	IC310	*A1	IC430	A2	R114	*C1	R146	C1	R178	C2	R221	B1	R253	*B1	R285	B1	R328	A1
		IC311	A2			R115	*C1	R147	*C1	R179	C2	R222	B1	R254	*B1	R286	B1	R329	A1


R330	A1	R432	*C2						
R331	B1	R433	*C2						
R332	A1	R434	*C2						
R333	A1	R435	*A2						
R334	A1	R436	*A2						
R335	A1	R437	*C2						
R336	A1	R438	C2						
R337	A1	R439	C2						
R338	A1	R440	C2						
R339	A1	R441	C2						
R340	*A1	R442	C2						
R341	A1	R443	C2						
R342	A1	R444	C2						
R343	A1	R445	C2						
R344	A1	R446	C2						
R345	A2	R447	C2						
R346	A2	R448	*C2						
R347	*A2	R449	*C2						
R348	*A2	R450	*B2						
R349	*A1	R451	*B2						
R350	*A1	R452	*B2						
R351	A2	R453	*B2						
R352	A2	R454	*B2						
R353	*A1	R455	*B2						
R354	*A1	R456	B2						
R355	*A1	R457	B2						
R356	B2	R458	B2						
R357	*A2	R459	B2						
R358	*A2	R460	B2						
R359	*A2	R461	B2						
R360	*A2	R462	B2						
R361	*A2	R463	B2						
R362	*A2	R464	B2						
R363	*A2	R465	B2						
R364	*A1	R466	B2						
R365	*A1	R467	B2						
R366	*A1	R468	B2						
R367	A2	R469	*B2						
R368	A2	R470	*B2						
R369	A2	R471	*B2						
R370	B2	R472	*B2						
R371	A2	R473	*B2						
R372	*A2	R474	*B2						
R373	B2	R475	B2						
R374	A2	R476	*C2						
R375	*A2	R477	B2						
R376	A2	R478	B2						
R377	*A2	R479	B2						
R378	B2	R480	B2						
R379	A2	R481	B2						
R380	*A2	R482	B2						
R381	A2	R483	B2						
R382	A2	R484	B2						
R383	A2	R485	B2						
R384	A2	R486	B2						
R385	A1	R487	B2						
R386	A1	R488	B2						
R387	A1	R489	C2						
R388	A1	R490	C2						
R389	*A1	R491	C2						
R390	*A1	R492	C2						
R401	A2	R493	C2						
R402	A2	R494	C2						
R403	A2	R495	*C2						
R404	A2	R496	*C2						
R405	A2	R497	*C2						
R406	A2	R498	*C2						
R407	A2	R499	*C2						
R408	A2	R500	*C2						
R409	A2	R501	*C2						
R410	A2	R502	*C2						
R411	A2	R503	*C2						
R412	A2	R504	*C2						
R413	A2	R505	*C2						
R414	A2	R506	*C2						
R415	A2	R507	*C2						
R416	A2	R508	*C2						
R417	A2	R509	*B2						
R418	B2	R510	*A2						
R419	*A2	R511	A2						
R420	*A2								
R421	*C2	RV101	C1						
R422	*A2	RV102	C1						
R423	*A2	RV103	C1						
R424	*C2	RV201	B1						
R425	*C2	RV202	B1						
R426	*C2	RV203	B1						
R427	*C2	RV301	A1						
R428	*C2	RV302	A1						
R429	*C2	RV303	A1						
R430	*C2								
R431	*C2	*:B SIDE							

PA-327 (1-865-959-21)

C102	*C1	C241	*B1	C426	*C2	IC412	A2
C103	*C1	C242	B2	C427	*C2	IC413	A2
C104	*C1	C243	B2	C428	*B2	IC414	A2
C105	*C1	C244	B2	C429	C2	IC415	A2
C106	*C1	C245	B2	C430	*B2	IC416	A2
C107	C1	C246	*B1	C431	*B2	IC417	A2
C108	C1	C247	*B2	C432	*B2	IC418	B2
C109	C1	C248	B2	C433	*B2	IC419	*C2
C110	C1	C249	B2	C434	B2	IC420	C2
C111	C1	C250	*B1	C435	*C2	IC421	*C2
C112	C1	C251	*B1	C436	*B2	IC422	B2
C113	*C1	C252	*B1	C437	*C2	IC423	B2
C114	C1	C253	*B1	C438	*B2	IC424	*A2
C115	*C1	C254	B2	C439	B2	IC425	*A2
C116	C1	C302	*A1	C440	*C2	IC426	*B2
C117	*C1	C303	*A1	C441	C2	IC427	*C2
C118	*C1	C304	*A1	C442	*C2		
C119	*C1	C305	*A1	C443	C2	L101	*C1
C120	C1	C306	*A1	C444	*C2	L201	*B1
C121	*C1	C307	A1	C445	*C2	L301	*A1
C122	*C1	C308	A1	C446	*C2	L401	*A2
C123	C1	C309	A1	C447	*C2	L402	C2
C124	*C1	C310	A1	C448	A2	L403	*B2
C125	C1	C311	A1	C449	A2	L404	C2
C126	C1	C312	A1	C450	A2		
C127	*C1	C313	*A1	C451	A2	Q401	*B2
C128	*C1	C314	A1	C452	A2	Q402	*B2
C129	C1	C315	*A1	C453	A2	Q403	*B2
C130	C1	C316	A1	C454	A2	Q404	*B2
C131	C1	C317	*A1	C455	A2	Q405	C2
C132	C1	C318	*A1	C456	A2	Q406	C2
C133	C1	C319	*A1	C457	A2		
C134	*C1	C320	A1	C458	A2	R102	*C1
C135	C1	C321	*A1	C459	A2	R103	*C1
C136	*C1	C322	*A1	C460	A2	R104	*C1
C137	C1	C323	A1	C461	A2	R105	*C1
C138	*C1	C324	*A1	C462	A2	R106	*C1
C139	*C1	C325	A1	C463	A2	R107	*C1
C140	C1	C326	A1	C464	B2	R108	*C1
C141	*C1	C327	*A1	C465	B2	R109	*C1
C142	C2	C328	*A1			R110	*C1
C143	C2	C329	A1	CL101	C1	R111	*C1
C144	C2	C330	A1	CL201	B1	R112	C1
C145	C2	C331	A1	CL301	A1	R113	*C1
C146	*C1	C332	A2	CL401	A2	R114	*C1
C147	*C1	C333	A1	CL402	A2	R115	C1
C148	C2	C334	*A2	CL403	A2	R116	C1
C149	C2	C335	A1	CL404	A2	R117	C1
C150	*C1	C336	*A1	CL405	A2	R118	C1
C151	*C1	C337	A1	CL406	A2	R119	C1
C152	*C1	C338	*A1			R120	C1
C153	*C1	C339	*A1	CN101	*C1	R121	C1
C154	C2	C340	A2	CN201	*B1	R122	C1
C202	*B1	C341	*A1	CN301	*A1	R123	C1
C203	*B1	C342	A2	CN401	*A2	R124	C1
C204	*B1	C343	A2	CN402	C2	R125	C1
C205	*B1	C344	A2			R126	C1
C206	*B1	C345	A2	E401	C2	R127	C1
C207	B1	C346	*A1			R128	C1
C208	B1	C347	*A2	FL101	*C2	R129	C1
C209	B1	C348	A2	FL201	*B2	R130	C1
C210	B1	C349	A2	FL301	*A2	R131	C1
C211	B1	C350	*A1			R132	*C1
C212	B1	C351	*A1	IC101	*C1	R133	*C1
C213	*B1	C352	*A1	IC102	*C1	R134	C1
C214	B1	C353	*A1	IC103	C1	R135	*C1
C215	*B1	C354	A2	IC104	C2	R136	C1
C216	B1	C401	*A2	IC105	*C1	R137	*C1
C217	*B1	C402	*A2	IC106	C2	R138	*C1
C218	*B1	C403	A2	IC201	*B1	R139	*C1
C219	*B1	C404	A2	IC202	*B1	R140	*C2
C220	B1	C405	A2	IC203	B1	R141	C2
C221	*B1	C406	A2	IC204	B2	R142	C2
C222	*B1	C407	A2	IC205	*B1	R143	C2
C223	B1	C408	A2	IC206	B2	R144	C2
C224	*B1	C409	A2	IC301	*A1	R145	C2
C225	B1	C410	A2	IC302	*A1	R146	C2
C226	B1	C411	A2	IC303	A1	R147	C2
C227	*B1	C412	A2	IC304	A2	R148	C2
C228	*B1	C413	A2	IC305	*A1	R149	C2
C229	B1	C414	A2	IC306	A2	R150	*C1
C230	B1	C415	A2	IC401	A2	R151	*C1
C231	B1	C416	A2	IC402	A2	R152	*C1
C232	B2	C417	A2	IC403	A2	R153	*C1
C233	B1	C418	A2	IC404	A2	R154	C2
C234	*B2	C419	A2	IC405	A2	R155	*C1
C235	B1	C420	B2	IC406	A2	R156	*C1
C236	*B1	C421	*A2	IC407	A2	R202	*B1
C237	B1	C422	*A2	IC408	A2	R203	*B1
C238	*B1	C423	*C2	IC409	A2	R204	*B1
C239	*B1	C424	*A2	IC410	A2	R205	*B1
C240	B2	C425	*B2	IC411	A2	R206	*B1

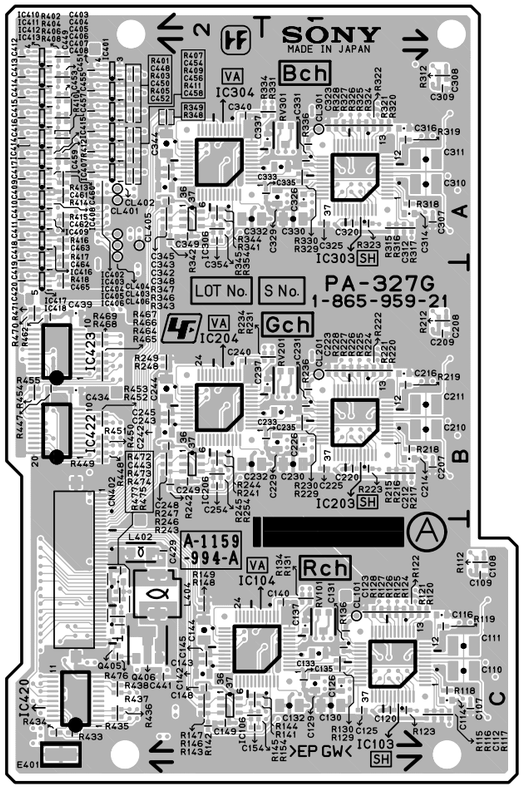

PA-327 -A SIDE-
SUFFIX: -21

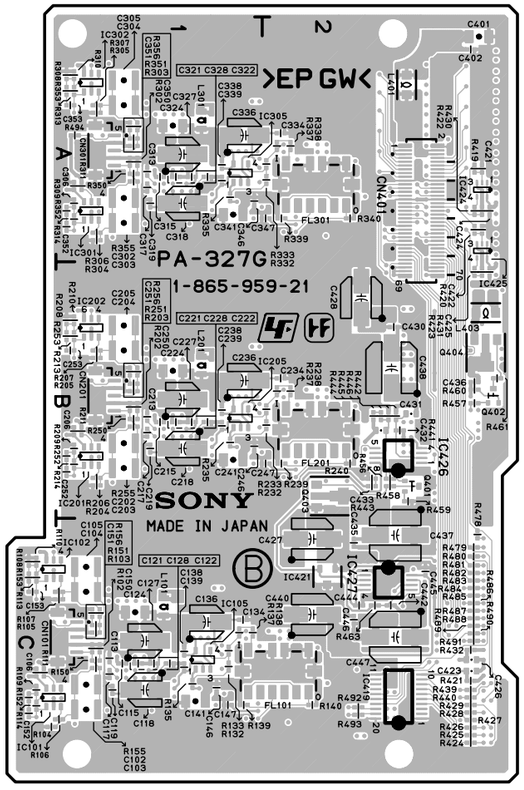


PA-327 -B SIDE-
SUFFIX: -21


R207	*B1	R344	A2	R480	*C2
R208	*B1	R345	A2	R481	*C2
R209	*B1	R346	A2	R482	*C2
R210	*B1	R347	A2	R483	*C2
R211	*B1	R348	A2	R484	*C2
R212	B1	R349	A2	R485	*C2
R213	*B1	R350	*A1	R486	*C2
R214	*B1	R351	*A1	R487	*C2
R215	B1	R352	*A1	R488	*C2
R216	B1	R353	*A1	R489	*C2
R217	B1	R354	A2	R490	*C2
R218	B1	R355	*A1	R491	*C2
R219	B1	R356	*A1	R492	*C2
R220	B1	R401	A2	R493	*C2
R221	B1	R402	A2	R494	*A1
R222	B1	R403	A2		
R223	B1	R404	A2	RV101	C1
R224	B1	R405	A2	RV201	B1
R225	B1	R406	A2	RV301	A1
R226	B1	R407	A2		
R227	B1	R408	A2	*:B SIDE	
R228	B1	R409	A2		
R229	B1	R410	A2		
R230	B1	R411	A2		
R231	B1	R412	A2		
R232	*B2	R413	A2		
R233	*B2	R414	A2		
R234	B1	R415	A2		
R235	*B1	R416	A2		
R236	B1	R417	A2		
R237	*B2	R418	B2		
R238	*B2	R419	*A2		
R239	*B2	R420	*A2		
R240	*B2	R421	*C2		
R241	B2	R422	*A2		
R242	B2	R423	*B2		
R243	B2	R424	*C2		
R244	B2	R425	*C2		
R245	B2	R426	*C2		
R246	B2	R427	*C2		
R247	B2	R428	*C2		
R248	B2	R429	*C2		
R249	B2	R430	*A2		
R250	*B1	R431	*B2		
R251	*B1	R432	*C2		
R252	*B1	R433	C2		
R253	*B1	R434	C2		
R254	B2	R435	C2		
R255	*B1	R436	C2		
R256	*B1	R437	C2		
R302	*A1	R438	C2		
R303	*A1	R439	*C2		
R304	*A1	R440	*C2		
R305	*A1	R441	*B2		
R306	*A1	R442	*B2		
R307	*A1	R443	*B2		
R308	*A1	R444	*B2		
R309	*A1	R445	*B2		
R310	*A1	R446	*B2		
R311	*A1	R447	B2		
R312	A1	R448	B2		
R313	*A1	R449	B2		
R314	*A1	R450	B2		
R315	A1	R451	B2		
R316	A1	R452	B2		
R317	A1	R453	B2		
R318	A1	R454	B2		
R319	A1	R455	B2		
R320	A1	R456	*B2		
R321	A1	R457	*B2		
R322	A1	R458	*B2		
R323	A1	R459	*B2		
R324	A1	R460	*B2		
R325	A1	R461	*B2		
R326	A1	R462	B2		
R327	A1	R463	*C2		
R328	A1	R464	B2		
R329	A1	R465	B2		
R330	A1	R466	B2		
R331	A1	R467	B2		
R332	*A2	R468	B2		
R333	*A2	R469	B2		
R334	A1	R470	B2		
R335	*A1	R471	B2		
R336	A1	R472	C2		
R337	*A2	R473	C2		
R338	*A2	R474	C2		
R339	*A2	R475	C2		
R340	*A2	R476	C2		
R341	A2	R477	C2		
R342	A2	R478	*C2		
R343	A2	R479	*C2		

SDI-84 (1-865-930-12)

C101	B4	C219	*B2	C422	E1	C644	B1	C935	E2	FB214	*D3	IC414	*C4	Q114	F4
C102	*A4	C220	*B3	C423	*E1	C645	*B2	C936	E2	FB215	*E3	IC415	D4	Q115	*F4
C103	*A4	C221	*B3	C424	E1	C646	*B2	C937	*E3	FB216	*E3	IC416	*C4	Q116	*F4
C104	*A4	C222	*C3	C425	D2	C701	*B2	C938	*E3	FB401	E1	IC417	*C4	Q117	*F4
C105	*B4	C223	*C3	C426	E2	C702	*A2	C939	*E3	FB402	*D1	IC418	*C4	Q118	*F4
C106	B4	C224	*C2	C427	D1	C703	*A2	C940	*E3	FB403	*E1	IC601	A1	Q119	*B4
C107	B4	C225	*C2	C428	D1	C704	*A2			FB404	D2	IC602	*B1	Q120	*E4
C108	*A4	C226	*C2	C429	*D1	C707	*A2	CL101	B4	FB405	D1	IC603	B1	Q201	E4
C109	*A4	C227	*C2	C430	*D1	C708	A2	CL102	A4	FB406	*D1	IC604	*B1	Q202	*E1
C110	*A4	C228	*C2	C431	D1	C710	A2	CL103	F1	FB407	*D1	IC605	B1	Q203	*E1
C111	A4	C229	*B2	C432	C1	C711	*A2	CL104	F1	FB408	*D1	IC606	*A1	Q204	*F1
C112	*B4	C230	*B3	C433	C1	C712	*A2	CL105	F1	FB409	C1	IC607	*B2	Q205	*F1
C113	A4	C231	*C2	C436	*C1	C713	*A2	CL106	F1	FB410	C1	IC701	*B2	Q206	*F1
C114	E4	C232	*C2	C437	*D1	C714	A3	CL107	F1	FB411	*D1	IC702	*A2	Q207	*F1
C115	*E4	C233	*C2	C438	*C4	C715	*A2	CL108	F1	FB601	*A1	IC703	*A2	Q208	*F2
C116	*E4	C234	*C2	C439	*B4	C716	A2	CL202	C3	FB602	*B1	IC704	B2	Q401	*D1
C117	*E2	C235	*C3	C441	*C3	C717	A3	CL203	E4	FB603	*B1	IC801	A3	Q402	*E1
C118	*E2	C236	*C2	C443	*B3	C718	*B2	CL204	E4	FB604	*B1	IC802	A4	Q403	*E2
C119	*E2	C237	*C2	C444	*B4	C719	*A2	CL401	D2	FB605	B1	IC851	*A3	Q404	*E1
C120	*E3	C238	*C3	C445	*B3	C721	*B3	CL402	D1	FB606	*B1	IC852	A2	Q405	*E1
C121	*E2	C239	*C3	C446	*B3	C723	*A2	CL403	D2	FB607	*B2	IC901	D2	Q406	*D1
C122	*E2	C240	*C3	C447	*B3	C724	*A3	CL404	D1	FB608	A2	IC902	E2	Q407	*E1
C123	*E3	C241	*D4	C448	*A3	C725	*B2	CL405	D1	FB609	*B2	IC903	E2	Q408	*E1
C124	*E2	C242	D4	C449	*A4	C726	*B2	CL407	D1	FB610	*A2	IC904	*C2	Q409	*E1
C125	E4	C243	*D3	C450	*B4	C727	*B3	CL408	D1	FB611	*B2	IC905	*E2	Q410	*E1
C126	*F3	C244	*C3	C451	*B4	C728	*B2	CL409	D1	FB612	*B1	IC906	*E2	Q411	*E1
C127	*F2	C245	C3	C452	*B3	C801	A3	CL601	B2	FB613	B1	IC907	*E2	Q412	*E1
C128	*F2	C246	C3	C453	*B3	C802	A3	CL603	A1	FB901	*D2			Q601	A1
C129	*F2	C247	C3	C454	*B3	C803	*A4	CL604	B2	FB902	C2	JC101	*D4	Q602	*A1
C130	*F2	C248	C3	C455	*B3	C804	A4	CL605	B2	FB903	C2	JC102	*F3	Q603	*B1
C131	*F2	C249	C3	C456	*B3	C805	A3	CL606	A2	FB904	*D3	JC103	*F3	Q604	*B1
C132	*E3	C250	*D3	C457	*B4	C806	A3	CL607	B2	FB905	*D3			Q605	*B1
C133	*F2	C251	*D3	C458	*B4	C807	A3	CL608	A1	FB906	*D2	L101	B4	Q606	*B1
C134	*F3	C252	*D3	C459	*B3	C808	A3	CL609	A2	FB907	*D2	L102	*E4	Q607	*A1
C135	*F2	C253	D3	C460	A3	C809	A3	CL610	A2	FB908	*D2	L103	*E4	Q608	*A1
C136	E4	C254	*E3	C461	*A3	C810	*A4	CL701	B2	FB909	*E2	L104	*E4	Q609	*A1
C137	*F3	C255	*D3	C462	*B3	C811	*A4	CL702	B2	FB910	*E2	L105	*E4	Q610	*B1
C138	*F3	C256	*E3	C463	*B3	C812	*A4	CL703	B2	FB911	E3	L106	E4	Q611	*B1
C141	*F3	C257	E3	C464	*B3	C813	A4	CL704	B2	FB912	*E2	L107	F4	Q612	*B1
C142	*F4	C258	E3	C465	*B3	C814	*A4	CL901	C2	FB913	*E2	L108	F4	Q613	*B1
C143	*F4	C259	E4	C466	*B4	C815	*A4			FB914	*D2	L201	*B2	Q617	B1
C144	*F4	C260	E3	C467	C4	C816	A4	CN101	*D4	FB915	*E2	L202	*C3	Q901	E3
C145	*F4	C261	E4	C468	C4	C851	*A3	CN102	E4	FB916	*E2	L203	*E3	Q902	E2
C146	*F4	C262	E3	C469	D4	C852	*A3	CN201	E3			L204	E3	Q903	E2
C147	*F4	C263	E4	C470	*C4	C853	*A3	CN202	B1	FL801	A4	L205	E3	Q904	*E2
C148	*F4	C264	E4	C471	*C4	C854	*A3	CN601	A1	FL851	A2	L206	*E1	Q905	E3
C149	*F3	C265	E3	C472	C4	C855	*A3	CN851	A2			L207	*E1	Q906	E3
C150	*F3	C266	E3	C473	B4	C856	*A3	CN901	E2	IC101	*A4	L208	*F1	Q907	*E3
C151	*E3	C267	E3	C474	*C4	C857	*A3			IC102	*E2	L401	*F1	Q908	*E3
C152	*F3	C268	E3	C475	*E1	C858	*A4	CP201	F3	IC103	*F2	L402	*B3	Q909	*E3
C155	*F3	C269	E3	C601	A1	C859	*A4	CP401	F1	IC104	*F2	L403	*A3		
C156	*F4	C270	*F3	C602	A1	C860	A2	CP901	F2	IC105	*F4	L404	*B4	R101	*A4
C157	*F4	C271	*E3	C603	A1	C861	A2			IC106	*F3	L601	A1	R102	*A4
C158	*E4	C272	E3	C604	*A1	C862	A2	D101	*E3	IC107	*E3	L602	A1	R103	*A4
C159	*F4	C273	E3	C605	*A1	C863	*A2	D102	*E2	IC108	*F3	L603	A1	R104	*A4
C160	*F4	C274	E3	C606	*A1	C864	*A2	D103	*E3	IC109	*F4	L604	*A1	R105	*A4
C161	*E4	C275	E3	C607	A1	C865	*A2	D104	*E3	IC110	F4	L605	*A1	R106	*A4
C162	*F4	C276	*E2	C608	*A1	C866	*A2	D105	*F2	IC111	F4	L702	*A3	R107	*A4
C163	*F3	C277	*E1	C609	*A1	C901	*D3	D106	*F2	IC112	*F4	L703	*A2	R108	*A4
C164	*F3	C278	*E1	C610	B1	C902	C3	D107	*F2	IC113	*F4	L704	*A2	R109	*A4
C165	*F3	C279	*E2	C611	B1	C903	*D2	D108	*F2	IC114	C2	L705	*A2	R110	*A4
C166	F4	C280	*E1	C612	*B1	C904	*D2	D109	*F2	IC201	D4	L706	*B2	R111	*A4
C167	*F4	C281	*F1	C613	*B1	C905	*C2	D110	*F2	IC202	C4	L707	*B2	R112	*A4
C168	*F4	C282	*F1	C614	*B1	C906	C2	D111	*F4	IC204	*C1	L801	A4	R113	*A4
C169	F4	C283	*F2	C615	*B1	C907	C2	D112	*E4	IC205	*C1	L802	A3	R114	*E2
C170	*F4	C284	*F1	C616	*B1	C908	C2	D113	*E4	IC206	*C2	L803	*A4	R115	*E2
C171	*F4	C285	*F2	C617	*B1	C909	C2	D114	*E3	IC207	C2	L804	*A4	R116	*E2
C172	*F4	C286	*F1	C618	*B1	C910	C2	D701	*A2	IC208	D3	L851	*A3	R117	*E2
C173	C2	C287	*F1	C619	B1	C911	*D3	D702	*A2	IC209	E3	L852	*A4	R118	*E2
C174	A4	C288	*F1	C620	B1	C912	*D3			IC210	E3	L853	*A2	R119	*E2
C175	*E4	C289	*C3	C621	*B1	C913	*D2	E1	C3	IC211	*C1	L854	*A2	R120	*E2
C176	E4	C401	*F1	C622	*B1	C914	D3	E2	*C3	IC212	C1	L901	*F2	R121	*E3
C177	E4	C402	E1	C623	*B1	C915	*E2			IC214	*E1	L902	E2	R122	*E3
C178	*E4	C403	*E1	C624	*B1	C916	*D2	FB101	*F3	IC215	*F1	L903	E2	R123	*E3
C179	*E4	C404	E1	C625	*B1	C917	*E2	FB102	*F3	IC216	*F1			R124	*E3
C180	*E4	C405	E1	C626	*B1	C918	E2	FB103	*E3	IC217	*C3	LP1	A3	R125	*E3
C201	D4	C406	E1	C627	*B1	C919	E2	FB104	*E3	IC218	D4	LP2	A4	R126	*E3
C202	D4	C407	E1	C628	*B1	C920	E3	FB105	*E3	IC219	E4	LP3	B2	R127	*E3
C203	*C1	C408	E1	C629	*B1	C921	E2	FB106	*F3	IC220	E4			R128	*E3
C204	D4	C409	E1	C630	B1	C922	E3	FB201	*D3	IC221	D4	Q101	*B4	R129	*E3
C205	D4	C410	E1	C631	B1	C923	E2	FB202	C3	IC401	*D1	Q102	*A4	R130	*F2
C206	D4	C411	E1	C632	*B1	C924	E3	FB203	C3	IC402	E1	Q103	*B4	R131	*F2
C208	C4	C412	*E1	C633	B1	C925	E3	FB204	*D4	IC403	D1	Q104	*A4	R132	*F2
C209	*C2	C413	E1	C634	A2	C926	E2	FB205	*D4	IC404	*D1	Q105	*E3	R133	*F2
C210	*C1	C414	*D1	C635	*B2	C927	E2	FB206	*D3	IC405	*C1	Q106	*E2	R134	*F2
C211	*C1	C415	*D2	C636	*B2	C928	E2	FB207	*D3	IC407	*C3	Q107	*E3	R135	*F2
C212	*C1	C416	*D2	C637	*A2	C929	E2	FB208	*D3	IC408	B3	Q108	*E3	R136	*F2
C213	*C1	C417	E1	C638	*B2	C930	E2	FB209	*E3	IC409	*B4	Q109	*E3	R137	*F2
C214	*C1	C418	E1	C639	*A1	C931	*F2	FB210	*E3	IC410	C4	Q110	*E3	R138	*F3
C215	*C1	C419	*D2	C640	*B1	C932	*E2	FB211	E4	IC411	C4	Q111	*F3	R139	*F3
C216	*C1	C420	*D1	C641	*A1	C933	E2	FB212	*E3	IC412	*C4	Q112	*F2	R141	*F4
C218	*C2	C421	*D1	C642	*B1	C934	E2	FB213	*E3	IC413	C4	Q113	F4	R142	*F4

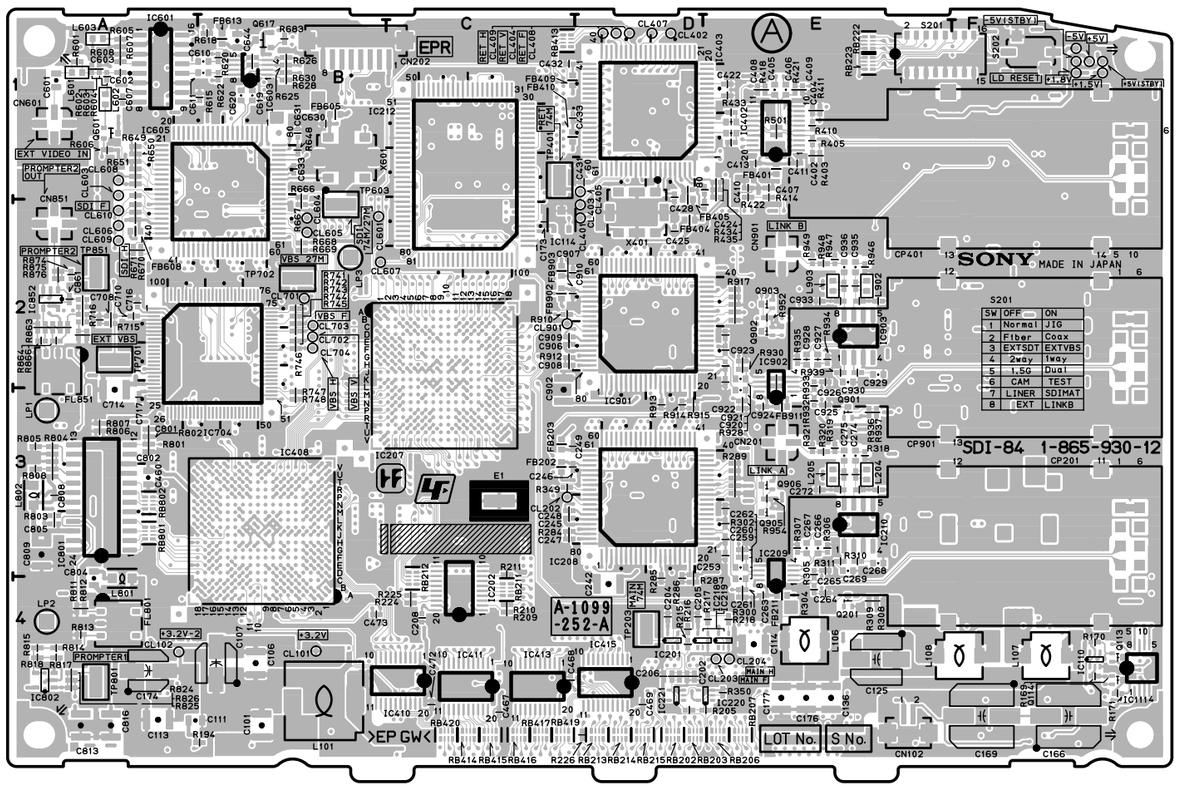

SDI-84 -A SIDE-
SUFFIX: -12

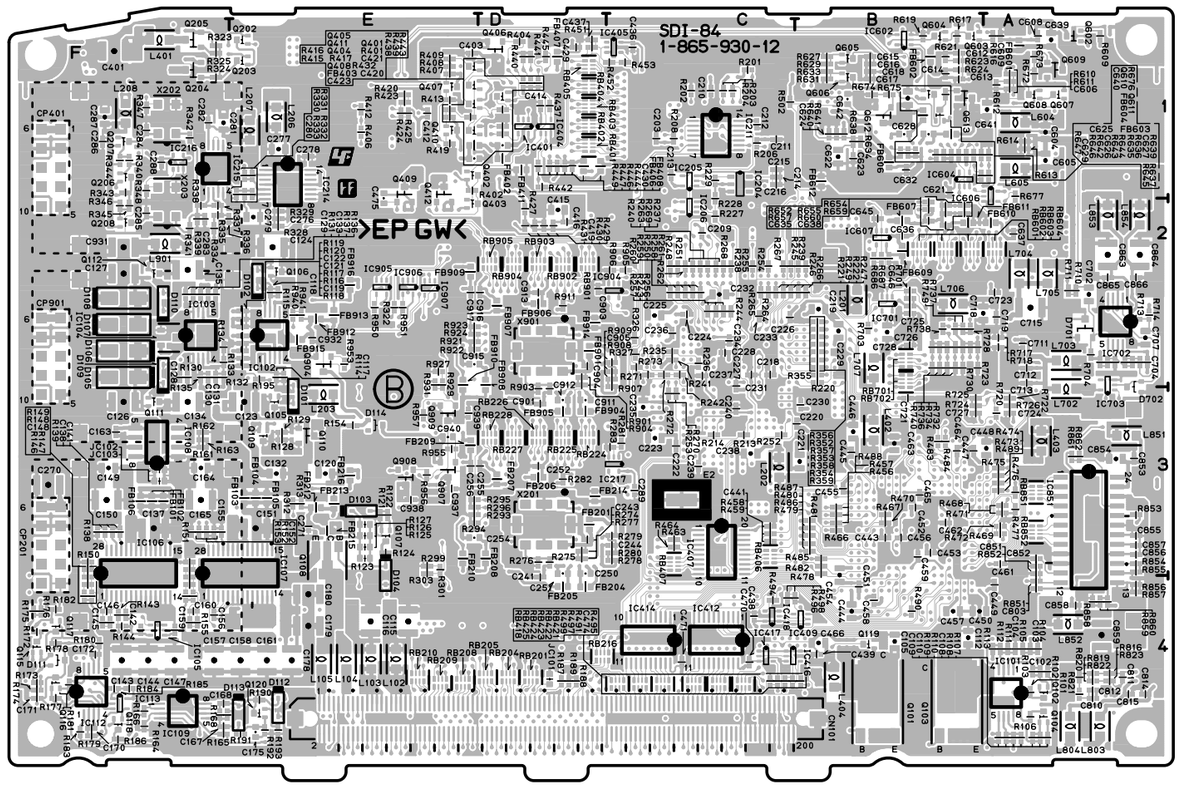


SDI-84 -B SIDE-
SUFFIX: -12


R143	*F4	R247	*B2	R339	*F2	R480	*B3	R675	*B1	R862	*A3	RB223	E1		
R144	*F4	R248	*C2	R340	*F1	R481	*B3	R676	*B1	R863	A2	RB224	*D3		
R145	*F4	R249	*C2	R341	*F2	R482	*B3	R677	*A1	R864	A2	RB225	*D3		
R146	*F4	R250	*C2	R342	*F1	R483	*B3	R683	B1	R865	A2	RB226	*D3		
R147	*F4	R251	*C2	R343	*F1	R484	*B3	R684	B1	R866	A2	RB227	*D3		
R148	*F4	R252	*C3	R344	*F1	R485	*B3	R685	B1	R867	A2	RB228	*D3		
R149	*F3	R253	*C3	R345	*F2	R486	*B3	R686	*B2	R868	A2	RB401	*D1		
R150	*F3	R254	*C2	R346	*F2	R487	*B3	R687	*B2	R869	A2	RB402	*D1		
R151	*F3	R255	*C2	R347	*F1	R488	*B3	R701	*B2	R870	A2	RB403	*D1		
R152	*F3	R256	*C2	R348	*F1	R489	*A3	R702	*B2	R871	A2	RB404	*D1		
R153	*F3	R257	*C2	R349	C3	R490	*B4	R703	*B2	R872	A2	RB405	*D1		
R154	*E3	R258	*C2	R350	E4	R491	*C4	R704	*A2	R873	A2	RB406	*C3		
R155	*F4	R259	*C2	R351	D4	R494	*C4	R705	*A2	R874	A2	RB407	*C3		
R156	*F4	R260	*C2	R352	*B2	R495	*B4	R706	*A2	R875	A2	RB413	C1		
R157	*F4	R261	*C2	R353	*B2	R496	*C4	R707	*A2	R876	A2	RB414	C4		
R158	*F4	R262	*C2	R354	*B2	R497	*C4	R708	*A2	R901	*D2	RB415	C4		
R159	*F3	R263	*C2	R355	*B2	R498	*C4	R709	*A2	R902	*D3	RB416	C4		
R160	*F3	R264	*C2	R356	*B2	R499	*C4	R710	*A2	R903	*D3	RB417	C4		
R161	*F3	R265	*C2	R357	*B2	R500	E1	R711	*A2	R904	*D2	RB418	*C4		
R162	*F3	R266	*C2	R358	*B2	R501	E1	R713	*A2	R905	*C2	RB419	C4		
R163	*F3	R267	*C2	R359	*B2	R502	*C1	R714	*A2	R906	*C2	RB420	C4		
R164	*F4	R268	*C2	R401	*D1	R601	A1	R715	A2	R907	*C2	RB421	*C4		
R165	*F4	R269	*C2	R402	*E1	R602	A1	R716	A2	R908	*C2	RB422	*C4		
R166	*F4	R270	*C3	R403	E1	R603	A1	R717	*A2	R909	*C2	RB423	*C4		
R167	*F4	R271	*C2	R404	*D1	R604	A1	R718	*A2	R910	C2	RB424	*C4		
R168	*F4	R272	*C2	R405	E1	R605	A1	R720	*A3	R911	*D2	RB425	*C4		
R169	F4	R273	*C2	R406	*E1	R606	A1	R721	*B2	R912	C2	RB601	*B2		
R170	F4	R274	*D3	R407	*E1	R607	A1	R722	*A3	R913	D3	RB602	*B2		
R171	F4	R275	*D3	R408	*E1	R608	A1	R723	*B2	R914	D3	RB603	*B2		
R172	*F4	R276	*D3	R409	*E1	R609	*A1	R724	*B3	R915	D3	RB604	*A2		
R173	*F4	R277	*D3	R410	E1	R610	*A1	R725	*B3	R916	E2	RB701	*B2		
R174	*F4	R278	*C3	R411	E1	R611	*A1	R726	*A3	R917	E2	RB702	*B2		
R175	*F4	R279	*C3	R412	*E1	R612	*A1	R727	*B2	R918	E2	RB801	A3		
R176	*F4	R280	*C3	R413	*E1	R613	*A1	R728	*B2	R919	E2	RB802	A3		
R177	*F4	R281	*C3	R414	E1	R614	*A1	R729	*B2	R920	E2	RB851	*A3		
R178	*F4	R282	*D3	R415	*E1	R615	B1	R730	*B2	R921	*E2	RB852	*A3		
R179	*F4	R283	*C3	R416	*E1	R616	*A1	R731	*B2	R922	*E2	RB901	*D2		
R180	*F4	R284	C3	R417	*E1	R617	*B1	R732	*B2	R923	*E2	RB902	*D2		
R181	*F4	R285	D4	R418	E1	R618	B1	R733	*B2	R924	*E2	RB903	*D2		
R182	*F4	R286	D4	R419	*E1	R619	*B1	R734	*B2	R925	E2	RB904	*D2		
R183	*F4	R287	D4	R420	*E1	R620	B1	R735	*B2	R926	E2	RB905	*D2		
R184	*F4	R288	E3	R421	E1	R621	*B1	R736	*B2	R927	*E2				
R185	*F4	R289	E3	R422	E1	R622	B1	R737	*B2	R928	E3	S201	E1		
R186	*F4	R290	E3	R423	*E1	R623	*B1	R738	*B2	R929	*E2	S202	F1		
R187	*D4	R291	E3	R424	*E1	R624	*B1	R739	*B2	R930	E2				
R188	*D4	R292	E3	R425	*E1	R625	B1	R740	*B2	R931	*E2	TP203	D4		
R189	*D4	R293	*E3	R426	E1	R626	B1	R741	B2	R932	E3	TP401	C1		
R190	*E4	R294	*E3	R427	*D2	R627	*B1	R742	B2	R933	E2	TP603	B2		
R191	*E4	R295	*E3	R428	E1	R628	B1	R743	B2	R934	E2	TP701	A2		
R192	*E4	R296	*E3	R429	*D2	R629	*B1	R744	B2	R935	E2	TP702	B2		
R193	*E4	R297	E3	R430	*D2	R630	B1	R745	B2	R936	E3	TP801	A4		
R194	B4	R298	E3	R431	*D2	R631	*B1	R746	B2	R937	E3	TP851	A2		
R195	*E2	R299	*E3	R432	*D1	R633	*B1	R747	B3	R938	E2				
R201	*C1	R300	E4	R433	E1	R634	*B1	R748	B3	R939	E2	X201	*D3		
R202	*C1	R301	*E3	R434	E1	R635	*B1	R749	*B2	R940	*E2	X202	*F1		
R203	*C1	R302	E3	R435	E1	R636	*B1	R801	A3	R941	*E2	X203	*F2		
R204	*C1	R303	*E3	R436	E1	R637	*A1	R802	A3	R942	E2	X401	D2		
R205	E4	R304	E4	R437	*D1	R638	*B1	R803	A3	R943	E2	X601	B1		
R206	*C1	R305	E3	R438	*D1	R639	*A1	R804	A3	R944	E2	X901	*D2		
R207	D4	R306	E3	R439	*D1	R640	*B1	R805	A3	R945	E2				
R208	*C1	R307	E3	R440	*D1	R641	*B1	R806	A3	R946	E2	*:B SIDE			
R209	C4	R308	E4	R441	*D1	R642	*B1	R807	A3	R947	E2				
R210	C4	R309	E4	R442	*D1	R643	*B1	R808	A3	R948	E2				
R211	C3	R310	E3	R443	*D1	R644	*B1	R809	A3	R949	E2				
R212	D4	R311	E3	R444	*D1	R645	*B1	R810	A3	R950	*E2				
R213	*C3	R312	*E3	R445	*D1	R646	*B1	R811	A4	R951	*E2				
R214	*C3	R313	*E3	R446	*D1	R647	*B1	R812	A4	R952	E2				
R215	D4	R314	E3	R447	*D1	R648	B1	R813	A4	R953	*E2				
R216	D4	R315	E3	R449	*D1	R649	A1	R814	A4	R954	E3				
R217	E4	R316	E3	R451	*D1	R650	A1	R815	A4	R955	*E3				
R218	E4	R317	E3	R452	*C1	R651	A1	R816	*A4	R956	*E3				
R220	*B2	R318	E3	R453	*C1	R652	*B2	R817	A4	R957	*E3				
R221	*C2	R319	E3	R456	*B3	R653	A1	R818	A4	R958	E2				
R222	*B2	R320	E3	R457	*B3	R654	*B2	R819	*A4	R959	E2				
R224	C4	R321	E3	R458	*C3	R655	*B2	R820	*A4						
R225	C4	R322	*E2	R459	*C3	R656	A1	R821	*A4	RB201	*D4				
R226	D4	R323	*F1	R463	*C3	R657	*B2	R822	*A4	RB202	D4				
R227	*C2	R324	*F1	R464	*C3	R658	A1	R823	*A4	RB203	D4				
R228	*C2	R325	*F1	R466	*B3	R659	*B2	R824	A4	RB204	*D4				
R229	*C1	R326	*C2	R467	*B3	R660	*B2	R825	A4	RB205	*D4				
R235	*C2	R327	*C2	R468	*A3	R661	A1	R826	A4	RB206	E4				
R236	*C2	R328	*E2	R469	*A3	R663	A2	R851	*A4	RB207	E4				
R237	*C2	R329	*E2	R470	*B3	R665	A2	R852	*A3	RB208	*E4				
R238	*C2	R330	*E1	R471	*A3	R666	B1	R853	*A3	RB209	*E4				
R239	*B2	R331	*E1	R472	*A3	R667	B2	R854	*A3	RB210	*E4				
R240	*C2	R332	*E1	R473	*A3	R668	B2	R855	*A3	RB211	C4				
R241	*C2	R333	*E1	R474	*A3	R669	B2	R856	*A4	RB212	C4				
R242	*C2	R334	*F2	R475	*A3	R670	A2	R857	*A4	RB213	D4				
R243	*C2	R335	*F2	R476	*A3	R671	A2	R858	*A4	RB214	D4				
R244	*C2	R336	*F2	R477	*A3	R672	*A1	R859	*A4	RB215	D4				
R245	*C2	R337	*F2	R478	*B3	R673	*A1	R860	*A4	RB216	*D4				
R246	*B2	R338	*F2	R479	*B3	R674	*B1	R861	*A3	RB222	E1				

SDI-84 (1-865-930-13)

C101	B4	C220	*B3	C423	*E1	C645	*B2	C936	E2	FB215	*E3	IC416	*C4	Q118	*F4
C102	*A4	C221	*B3	C424	E1	C646	*B2	C937	*E3	FB216	*E3	IC417	*C4	Q119	*B4
C103	*A4	C222	*C3	C425	D2	C701	*B2	C938	*E3	FB401	E1	IC418	*C4	Q120	*E4
C104	*A4	C223	*C3	C426	E2	C702	*A2	C939	*E3	FB402	*D1	IC601	A1	Q201	E4
C105	*B4	C224	*C2	C427	D1	C703	*A2	C940	*E3	FB403	*E1	IC602	*B1	Q202	*E1
C106	B4	C225	*C2	C428	D1	C704	*A2			FB404	D2	IC603	B1	Q203	*E1
C107	B4	C226	*C2	C429	*D1	C707	*A2	CL101	B4	FB405	D1	IC604	*B1	Q204	*F1
C108	*A4	C227	*C2	C430	*D1	C708	A2	CL102	A4	FB406	*D1	IC605	B1	Q205	*F1
C109	*A4	C228	*C2	C431	D1	C710	A2	CL103	F1	FB407	*D1	IC606	*A1	Q206	*F1
C110	*A4	C229	*B2	C432	C1	C711	*A2	CL104	F1	FB408	*D1	IC607	*B2	Q207	*F1
C111	B4	C230	*B3	C433	C1	C712	*A2	CL105	F1	FB409	C1	IC701	*B2	Q208	*F2
C112	*B4	C231	*C2	C436	*C1	C713	*A2	CL106	F1	FB410	C1	IC702	*A2	Q401	*D1
C113	A4	C232	*C2	C437	*D1	C714	A3	CL107	F1	FB411	*D1	IC703	*A2	Q402	*E1
C114	E4	C233	*C2	C438	*C4	C715	*A2	CL108	F1	FB601	*A1	IC704	B2	Q403	*E2
C115	*E4	C234	*C2	C439	*B4	C716	A2	CL202	C3	FB602	*B1	IC801	A3	Q404	*E1
C116	*E4	C235	*C3	C441	*C3	C717	A3	CL203	E4	FB603	*B1	IC802	A4	Q405	*E1
C117	*E2	C236	*C2	C443	*B3	C718	*A2	CL204	E4	FB604	*B1	IC851	*A3	Q406	*D1
C118	*E2	C237	*C2	C444	*B4	C719	*A2	CL401	D2	FB605	B1	IC852	A2	Q407	*E1
C119	*E2	C238	*C3	C445	*B3	C721	*B3	CL402	D1	FB606	*B1	IC901	D2	Q408	*E1
C120	*E3	C239	*C3	C446	*B3	C723	*A2	CL403	D2	FB607	*B2	IC902	E2	Q409	*E1
C121	*E2	C240	*C3	C447	*B3	C724	*A3	CL404	D1	FB608	A2	IC903	E2	Q410	*E1
C122	*E2	C241	*D4	C448	*A3	C725	*B2	CL405	D1	FB609	*B2	IC904	*C2	Q411	*E1
C123	*E3	C242	D4	C449	*A4	C726	*B2	CL407	D1	FB610	*A2	IC905	*E2	Q412	*E1
C124	*E2	C243	*D3	C450	*B4	C727	*B3	CL408	D1	FB611	*B2	IC906	*E2	Q601	A1
C125	E4	C244	*C3	C451	*B4	C728	*B2	CL409	D1	FB612	*B1	IC907	*E2	Q602	*A1
C126	*F3	C245	C3	C452	*B3	C801	A3	CL601	B2	FB613	B1			Q603	*B1
C127	*F2	C246	C3	C453	*B3	C802	A3	CL603	A1	FB901	*D2	JC101	*D4	Q604	*B1
C128	*F2	C247	C3	C454	*B3	C803	*A4	CL604	B2	FB902	C2			Q605	*B1
C129	*F2	C248	C3	C455	*B3	C804	A4	CL605	B2	FB903	C2	L101	B4	Q606	*B1
C130	*F2	C249	C3	C456	*B3	C805	A3	CL606	A2	FB904	*D3	L102	*E4	Q607	*A1
C131	*F2	C250	*D3	C457	*B4	C806	A3	CL607	B2	FB905	*D3	L103	*E4	Q608	*A1
C132	*E3	C251	*D3	C458	*B4	C807	A3	CL608	A1	FB906	*D2	L104	*E4	Q609	*A1
C133	*F2	C252	*D3	C459	*B3	C808	A3	CL609	A2	FB907	*D2	L105	*E4	Q610	*B1
C134	*F3	C253	D3	C460	A3	C809	A3	CL610	A2	FB908	*D2	L106	E4	Q611	*B1
C135	*F2	C254	*E3	C461	*A3	C810	*A4	CL701	B2	FB909	*E2	L107	F4	Q612	*B1
C136	E4	C255	*D3	C462	*B3	C811	*A4	CL702	B2	FB910	*E2	L108	F4	Q613	*B1
C137	*F3	C256	*E3	C463	*B3	C812	*A4	CL703	B2	FB911	E3	L201	*B2	Q617	B1
C138	*F3	C257	E3	C464	*B3	C813	A4	CL704	B2	FB912	*E2	L202	*C3	Q901	E3
C141	*F3	C258	E3	C465	*B3	C814	*A4	CL901	C2	FB913	*E2	L203	*E3	Q902	E2
C142	*F4	C259	E4	C466	*B4	C815	*A4			FB914	*D2	L204	E3	Q903	E2
C143	*F4	C260	E3	C467	C4	C816	A4	CN101	*D4	FB915	*E2	L205	E3	Q904	*E2
C144	*F4	C261	E4	C468	C4	C851	*A3	CN102	E4	FB916	*E2	L206	*E1	Q905	E3
C145	*F4	C262	E3	C469	D4	C852	*A3	CN201	E3			L207	*E1	Q906	E3
C146	*F4	C263	E4	C470	*C4	C853	*A3	CN202	B1	FL801	A4	L208	*F1	Q907	*E3
C147	*F4	C264	E4	C471	*C4	C854	*A3	CN601	A1	FL851	A2	L401	*F1	Q908	*E3
C148	*F4	C265	E3	C472	C4	C855	*A3	CN851	A2			L402	*B3	Q909	*E3
C149	*F3	C266	E3	C473	B4	C856	*A3	CN901	E2	IC101	*A4	L403	*A3		
C150	*F3	C267	E3	C474	*C4	C857	*A3			IC102	*E2	L404	*B4	R101	*A4
C151	*E3	C268	E3	C475	*E2	C858	*A4	CP201	F3	IC103	*F2	L601	A1	R102	*A4
C152	*F3	C269	E3	C476	*E1	C859	*A4	CP401	F1	IC104	*F2	L602	A1	R103	*A4
C155	*F3	C270	*F3	C602	A1	C860	A2	CP901	F2	IC105	*F4	L603	A1	R104	*A4
C156	*F4	C271	*E3	C603	A1	C861	A2			IC106	*F3	L604	*A1	R105	*A4
C157	*F4	C272	E3	C604	*A1	C862	A2	D101	*E3	IC107	*E3	L605	*A1	R106	*A4
C158	*E4	C273	E3	C605	*A1	C863	*A2	D102	*E2	IC109	*F4	L702	*A3	R107	*A4
C159	*F4	C274	E3	C606	*A1	C864	*A2	D103	*E3	IC110	F4	L703	*A2	R108	*A4
C160	*F4	C275	E3	C607	A1	C865	*A2	D104	*E3	IC111	F4	L704	*A2	R109	*A4
C161	*E4	C276	*E2	C608	*A1	C866	*A2	D105	*F2	IC112	*F4	L705	*A2	R110	*A4
C162	*F4	C277	*E1	C609	*A1	C901	*D3	D106	*F2	IC113	*F4	L706	*B2	R111	*A4
C164	*F3	C278	*E1	C610	B1	C902	C3	D107	*F2	IC114	C2	L707	*B2	R112	*A4
C165	*F3	C279	*E2	C611	B1	C903	*D2	D108	*F2	IC201	D4	L801	A4	R113	*A4
C166	F4	C280	*E1	C612	*B1	C904	*D2	D109	*F2	IC202	C4	L802	A3	R114	*E2
C167	*F4	C281	*F1	C613	*B1	C905	*C2	D110	*F2	IC204	*C1	L803	*A4	R115	*E2
C168	*F4	C282	*F1	C614	*B1	C906	C2	D111	*F4	IC205	*C1	L804	*A4	R116	*E2
C169	F4	C283	*F2	C615	*B1	C907	C2	D112	*E4	IC206	*C2	L851	*A3	R117	*E2
C170	*F4	C284	*F1	C616	*B1	C908	C2	D113	*E4	IC207	C2	L852	*A4	R118	*E2
C171	*F4	C285	*F2	C617	*B1	C909	C2	D114	*E3	IC208	D3	L853	*A2	R119	*E2
C172	*F4	C286	*F1	C618	*B1	C910	C2	D701	*A2	IC209	E3	L854	*A2	R120	*E2
C173	C2	C287	*F1	C619	B1	C911	*D3	D702	*A2	IC210	E3	L901	*F2	R121	*E3
C174	A4	C288	*F1	C620	B1	C912	*D3			IC211	*C1	L902	E2	R122	*E3
C175	*E4	C289	*C3	C621	*B1	C913	*D2	E1	C3	IC212	C1	L903	E2	R123	*E3
C176	E4	C401	*F1	C622	*B1	C914	D3	E2	*C3	IC214	*E1			R124	*E3
C177	E4	C402	E1	C623	*B1	C915	*E2			IC215	*F1	LP1	A3	R125	*E3
C178	*E4	C403	*E1	C624	*B1	C916	*D2	FB101	*F3	IC216	*F1	LP2	A4	R126	*E3
C179	*E4	C404	E1	C625	*B1	C917	*E2	FB102	*F3	IC217	*C3	LP3	B2	R127	*E3
C180	*E4	C405	E1	C626	*B1	C918	E2	FB103	*E3	IC218	E4			R128	*E3
C201	D4	C406	E1	C627	*B1	C919	E2	FB104	*E3	IC219	E4	Q101	*B4	R129	*E3
C202	D4	C407	E1	C628	*B1	C920	E3	FB105	*E3	IC220	E4	Q102	*A4	R130	*F2
C203	*C1	C408	E1	C629	*B1	C921	E2	FB106	*F3	IC221	D4	Q103	*B4	R131	*F2
C204	D4	C409	E1	C630	B1	C922	E3	FB201	*D3	IC401	*D1	Q104	*A4	R132	*F2
C205	D4	C410	E1	C631	B1	C923	E2	FB202	C3	IC402	E1	Q105	*E3	R133	*F2
C206	D4	C411	E1	C632	*B1	C924	E3	FB203	C3	IC403	D1	Q106	*E2	R134	*F2
C208	C4	C412	*E1	C633	B1	C925	E3	FB204	*D4	IC404	*D1	Q107	*E3	R135	*F2
C209	*C2	C413	E1	C634	A2	C926	E2	FB205	*D4	IC405	*C1	Q108	*E3	R136	*F2
C210	*C1	C414	*D1	C635	*B2	C927	E2	FB206	*D3	IC407	*C3	Q109	*E3	R137	*F2
C211	*C1	C415	*D2	C636	*B2	C928	E2	FB207	*D3	IC408	B3	Q110	*E3	R138	*F3
C212	*C1	C416	*D2	C637	*A2	C929	E2	FB208	*D3	IC409	*B4	Q111	*F3	R139	*F3
C213	*C1	C417	E1	C638	*B2	C930	E2	FB209	*E3	IC410	C4	Q112	*F2	R141	*F4
C214	*C1	C418	E1	C639	*A1	C931	*F2	FB210	*E3	IC411	C4	Q113	F4	R142	*F4
C215	*C1	C419	*D2	C640	*B1	C932	*E2	FB211	E4	IC412	*C4	Q114	F4	R143	*F4
C216	*C1	C420	*D1	C641	*A1	C933	E2	FB212	*E3	IC413	C4	Q115	*F4	R144	*F4
C218	*C2	C421	*D1	C642	*B1	C934	E2	FB213	*E3	IC414	*C4	Q116	*F4	R145	*F4
C219	*B2	C422	E1	C644	B1	C935	E2	FB214	*D3	IC415	D4	Q117	*F4	R146	*F4

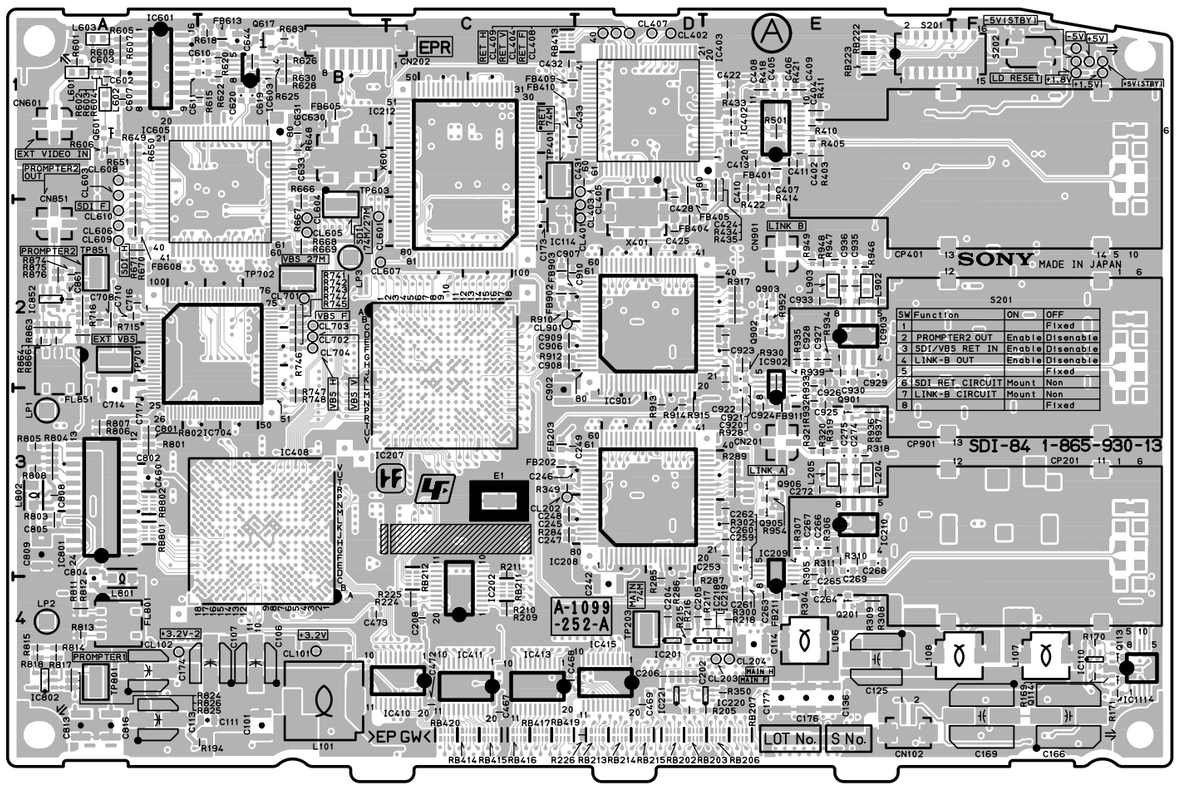

SDI-84 -A SIDE-
SUFFIX: -13

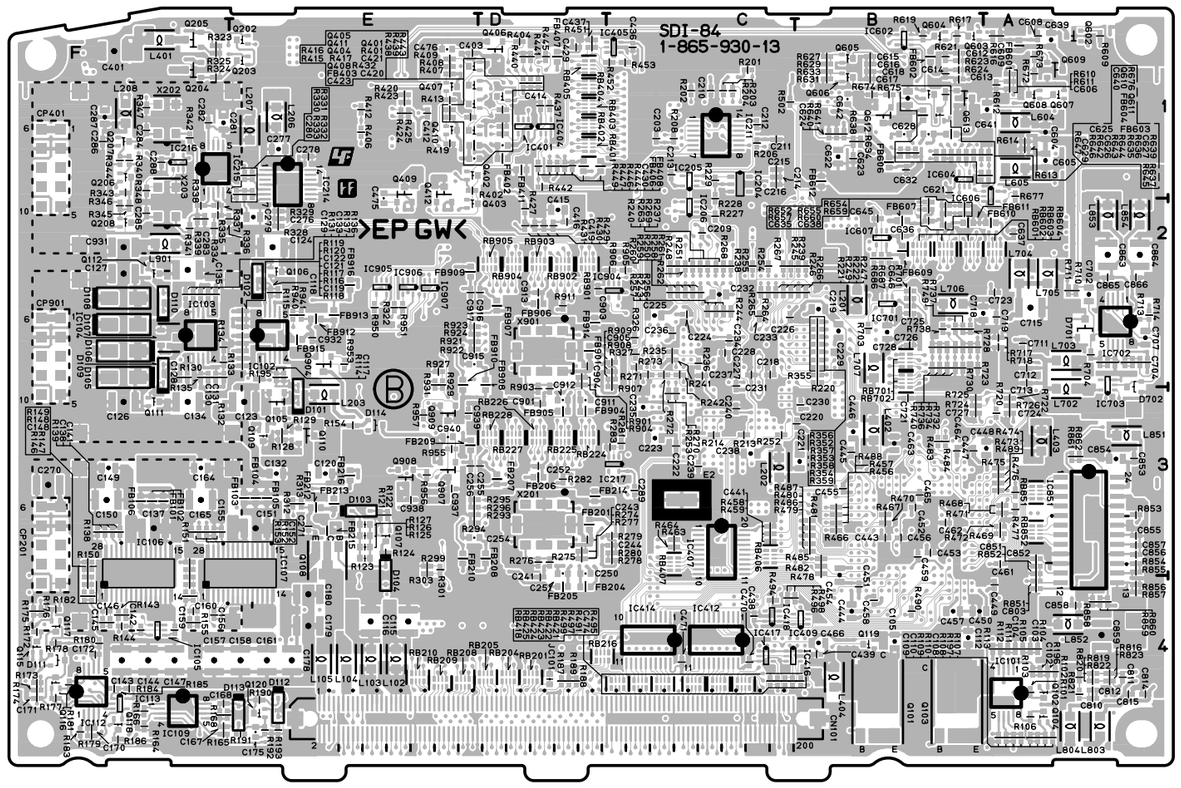


SDI-84 -B SIDE-
SUFFIX: -13


R147	*F4	R252	*C3	R344	*F1	R485	*B3	R685	B1	R867	A2	RB228	*D3		
R148	*F4	R253	*C3	R345	*F2	R486	*B3	R686	*B2	R868	A2	RB401	*D1		
R149	*F3	R254	*C2	R346	*F2	R487	*B3	R687	*B2	R869	A2	RB402	*D1		
R150	*F3	R255	*C2	R347	*F1	R488	*B3	R701	*B2	R870	A2	RB403	*D1		
R151	*F3	R256	*C2	R348	*F1	R489	*A3	R702	*B2	R871	A2	RB404	*D1		
R152	*F3	R257	*C2	R349	C3	R490	*B4	R703	*B2	R872	A2	RB405	*D1		
R153	*F3	R258	*C2	R350	E4	R491	*C4	R704	*A2	R873	A2	RB406	*C3		
R154	*E3	R259	*C2	R351	D4	R494	*C4	R705	*A2	R874	A2	RB407	*C3		
R155	*F4	R260	*C2	R352	*B2	R495	*B4	R706	*A2	R875	A2	RB413	C1		
R156	*F4	R261	*C2	R353	*B2	R496	*C4	R707	*A2	R876	A2	RB414	C4		
R157	*F4	R262	*C2	R354	*B2	R497	*C4	R708	*A2	R901	*D2	RB415	C4		
R158	*F4	R263	*C2	R355	*B2	R498	*B4	R709	*A2	R902	*D3	RB416	C4		
R159	*F3	R264	*C2	R356	*B2	R499	*C4	R710	*A2	R903	*D3	RB417	C4		
R160	*F3	R265	*C2	R357	*B2	R500	E1	R711	*A2	R904	*D2	RB418	*C4		
R164	*F4	R266	*C2	R358	*B2	R501	E1	R713	*A2	R905	*C2	RB419	C4		
R165	*F4	R267	*C2	R359	*B2	R502	*C1	R714	*A2	R906	*C2	RB420	C4		
R166	*F4	R268	*C2	R401	*D1	R601	A1	R715	A2	R907	*C3	RB421	*C4		
R167	*F4	R269	*C2	R402	*E1	R602	A1	R716	A2	R908	*C2	RB422	*C4		
R168	*F4	R270	*C3	R403	E1	R603	A1	R717	*A2	R909	*C2	RB423	*C4		
R169	F4	R271	*C2	R404	*D1	R604	A1	R718	*A2	R910	C2	RB424	*C4		
R170	F4	R272	*C2	R405	E1	R605	A1	R720	*A3	R911	*D2	RB425	*C4		
R171	F4	R273	*C2	R406	*E1	R606	A1	R721	*B2	R912	C2	RB601	*B2		
R172	*F4	R274	*D3	R407	*E1	R607	A1	R722	*A3	R913	D3	RB602	*B2		
R173	*F4	R275	*D3	R408	*E1	R608	A1	R723	*B2	R914	D3	RB603	*B2		
R174	*F4	R276	*D3	R409	*E1	R609	*A1	R724	*B3	R915	D3	RB604	*A2		
R175	*F4	R277	*D3	R410	E1	R610	*A1	R725	*B3	R916	E2	RB701	*B2		
R176	*F4	R278	*C3	R411	E1	R611	*A1	R726	*A3	R917	E2	RB702	*B2		
R177	*F4	R279	*C3	R412	*E1	R612	*A1	R727	*B2	R918	E2	RB801	A3		
R178	*F4	R280	*C3	R413	*E1	R613	*A1	R728	*B2	R919	E2	RB802	A3		
R179	*F4	R281	*C3	R414	E1	R614	*A1	R729	*B2	R920	E2	RB851	*A3		
R180	*F4	R282	*D3	R415	*E1	R615	B1	R730	*B2	R921	*E2	RB852	*A3		
R181	*F4	R283	*C3	R416	*E1	R616	*A1	R731	*B2	R922	*E2	RB901	*D2		
R182	*F4	R284	C3	R417	*E1	R617	*B1	R732	*B2	R923	*E2	RB902	*D2		
R183	*F4	R285	D4	R418	E1	R618	B1	R733	*B2	R924	*E2	RB903	*D2		
R184	*F4	R286	D4	R419	*E1	R619	*B1	R734	*B2	R925	E2	RB904	*D2		
R185	*F4	R287	D4	R420	*E1	R620	B1	R735	*B2	R926	E2	RB905	*D2		
R186	*F4	R288	E3	R421	E1	R621	*B1	R736	*B2	R927	*E2				
R187	*D4	R289	E3	R422	E1	R622	B1	R737	*B2	R928	E3	S201	E1		
R188	*D4	R290	E3	R423	*E1	R623	*B1	R738	*B2	R929	*E2	S202	F1		
R189	*D4	R291	E3	R424	*E1	R624	*B1	R739	*B2	R930	E2				
R190	*E4	R292	E3	R425	*E1	R625	B1	R740	*B2	R931	*E2	TP203	D4		
R191	*E4	R293	*E3	R426	E1	R626	B1	R741	B2	R932	E3	TP401	C1		
R192	*E4	R294	*E3	R427	*D2	R627	*B1	R742	B2	R933	E2	TP603	B2		
R193	*E4	R295	*E3	R428	E1	R628	B1	R743	B2	R934	E2	TP701	A2		
R194	B4	R296	*E3	R429	*D2	R629	*B1	R744	B2	R935	E2	TP702	B2		
R195	*E2	R297	E3	R430	*D2	R630	B1	R745	B2	R936	E3	TP801	A4		
R196	*A4	R298	E3	R431	*D2	R631	*B1	R746	B2	R937	E3	TP851	A2		
R197	*A4	R299	*E3	R432	*D1	R633	*B1	R747	B3	R938	E2				
R201	*C1	R300	E4	R433	E1	R634	*B1	R748	B3	R939	E2	X201	*D3		
R202	*C1	R301	*E3	R434	E1	R635	*B1	R749	*B2	R940	*E2	X202	*F1		
R203	*C1	R302	E3	R435	E1	R636	*B1	R801	A3	R941	*E2	X203	*F2		
R204	*C1	R303	*E3	R436	E1	R637	*A1	R802	A3	R942	E2	X401	D2		
R205	E4	R304	E4	R437	*D1	R638	*B1	R803	A3	R943	E2	X601	B1		
R206	*C1	R305	E3	R438	*D1	R639	*A1	R804	A3	R944	E2	X901	*D2		
R207	D4	R306	E3	R439	*D1	R640	*B1	R805	A3	R945	E2				
R208	*C1	R307	E3	R440	*D1	R641	*B1	R806	A3	R946	E2	*:B SIDE			
R209	C4	R308	E4	R441	*D1	R642	*B1	R807	A3	R947	E2				
R210	C4	R309	E4	R442	*D1	R643	*B1	R808	A3	R948	E2				
R211	C3	R310	E3	R443	*D1	R644	*B1	R809	A3	R949	E2				
R212	D4	R311	E3	R444	*D1	R645	*B1	R810	A3	R950	*E2				
R213	*C3	R312	*E3	R445	*D1	R646	*B1	R811	A4	R951	*E2				
R214	*C3	R313	*E3	R446	*D1	R647	*B1	R812	A4	R952	E2				
R215	D4	R314	E3	R447	*D1	R648	B1	R813	A4	R953	*E2				
R216	D4	R315	E3	R449	*D1	R649	A1	R814	A4	R954	E3				
R217	E4	R316	E3	R451	*D1	R650	A1	R815	A4	R955	*E3				
R218	E4	R317	E3	R452	*C1	R651	A1	R816	*A4	R956	*E3				
R220	*B2	R318	E3	R453	*C1	R652	*B2	R817	A4	R957	*E3				
R221	*C2	R319	E3	R456	*B3	R653	A1	R818	A4	R958	E2				
R222	*B2	R320	E3	R457	*B3	R654	*B2	R819	*A4	R959	E2				
R224	C4	R321	E3	R458	*C3	R655	*B2	R820	*A4						
R225	C4	R322	*E2	R459	*C3	R656	A1	R821	*A4	RB201	*D4				
R226	D4	R323	*F1	R463	*C3	R657	*B2	R822	*A4	RB202	D4				
R227	*C2	R324	*F1	R464	*C3	R658	A1	R823	*A4	RB203	D4				
R228	*C2	R325	*F1	R466	*B3	R659	*B2	R824	A4	RB204	*D4				
R229	*C1	R326	*C2	R467	*B3	R660	*B2	R825	A4	RB205	*D4				
R235	*C2	R327	*C2	R468	*A3	R661	A1	R826	A4	RB206	E4				
R236	*C2	R328	*E2	R469	*A3	R663	A2	R851	*A4	RB207	E4				
R237	*C2	R329	*E2	R470	*B3	R665	A2	R852	*A3	RB208	*E4				
R238	*C2	R330	*E1	R471	*A3	R666	B1	R853	*A3	RB209	*E4				
R239	*B2	R331	*E1	R472	*A3	R667	B2	R854	*A3	RB210	*E4				
R240	*C2	R332	*E1	R473	*A3	R668	B2	R855	*A3	RB211	C4				
R241	*C2	R333	*E1	R474	*A3	R669	B2	R856	*A4	RB212	C4				
R242	*C2	R334	*F2	R475	*A3	R670	A2	R857	*A4	RB213	D4				
R243	*C2	R335	*F2	R476	*A3	R671	A2	R858	*A4	RB214	D4				
R244	*C2	R336	*E2	R477	*A3	R672	*A1	R859	*A4	RB215	D4				
R245	*C2	R337	*F2	R478	*B3	R673	*A1	R860	*A4	RB216	*D4				
R246	*B2	R338	*F2	R479	*B3	R674	*B1	R861	*A3	RB222	E1				
R247	*B2	R339	*F2	R480	*B3	R675	*B1	R862	*A3	RB223	E1				
R248	*C2	R340	*F1	R481	*B3	R676	*B1	R863	A2	RB224	*D3				
R249	*C2	R341	*F2	R482	*B3	R677	*A1	R864	A2	RB225	*D3				
R250	*C2	R342	*F1	R483	*B3	R683	B1	R865	A2	RB226	*D3				
R251	*C2	R343	*F1	R484	*B3	R684	B1	R866	A2	RB227	*D3				

SW-1233 (1-867-455-12)

C1	B1	Q123	D2	S25	A2
C2	B1			S26	C1
C3	B1	R1	A1	S27	D1
C4	C1	R2	C2	S28	C1
C5	B1	R3	C2	S29	A1
C6	C2	R4	A1	S30	B1
C7	A1	R5	A1	S31	B1
C8	A1	R6	A1		
C10	A1	R7	C1	*:B SIDE	
C14	B1	R8	C1		
C100	C1	R9	C1		
C101	C2	R10	C1		
C102	*C2	R11	D1		
C103	*D2	R12	D1		
		R13	D1		
CN1	A1	R14	D1		
CN2	A2	R15	C1		
CN3	D2	R16	C1		
CN4	D2	R17	C1		
CN5	D2	R18	C1		
CN6	D2	R19	C1		
		R20	C1		
D1	A1	R21	C1		
D2	A1	R22	C1		
D3	A1	R23	B1		
D4	*C1	R24	B1		
D5	*C1	R25	B1		
D6	*C1	R26	B1		
D7	*C1	R27	B1		
D8	*D1	R28	C1		
D9	*D1	R29	D1		
D10	*D1	R30	C1		
D11	*D1	R31	C1		
D12	*A2	R32	D1		
D13	*A2	R34	B1		
D14	*A2	R35	B1		
D15	*A2	R36	B1		
D16	*A1	R37	B1		
D17	*A2	R38	B1		
D18	*B2	R70	A2		
D19	*A2	R100	C1		
D20	*A2	R101	C1		
D21	*A1	R102	D1		
D22	*A1	R103	D1		
D23	*B1	R104	C1		
D24	*B2	R105	D1		
D25	*C2	R106	D1		
D26	*A1	R107	D1		
D27	*C2	R108	*C2		
D29	*A2	R109	*C2		
D30	*D2	R110	*C2		
D31	*C1	R111	*C2		
D32	*C2	R112	*D2		
		R113	*D2		
EN1	C2	R114	*D2		
		R115	*D2		
IC1	B1	R116	*C2		
IC2	B1	R117	*C2		
IC3	B1	R118	*C2		
IC4	A1	R119	*C2		
		R120	*C2		
Q1	B1	R121	*C2		
Q2	B1	R122	*C2		
Q3	B1	R123	*C2		
Q4	B1	R124	*C2		
Q5	B1	R125	*C2		
Q6	B1				
Q7	B1	RV1	B1		
Q8	B1	RV2	B2		
Q100	C2	RV3	B1		
Q101	C2	RV4	B2		
Q102	D2	RV5	D2		
Q103	D2				
Q104	C2	S1	A1		
Q105	C2	S2	A2		
Q106	C2	S3	C1		
Q107	C2	S4	D1		
Q108	C2	S5	A2		
Q109	C2	S6	B2		
Q110	D2	S7	A2		
Q111	D2	S8	A2		
Q112	C2	S9	B2		
Q113	C2	S10	B2		
Q114	D2	S11	C2		
Q115	D2	S12	C2		
Q116	C2	S13	D2		
Q117	C2	S14	C1		
Q118	C2	S15	C2		
Q119	C2	S20	D2		
Q120	C2	S21	A1		
Q121	D2	S22	C2		
Q122	D2	S24	C2		

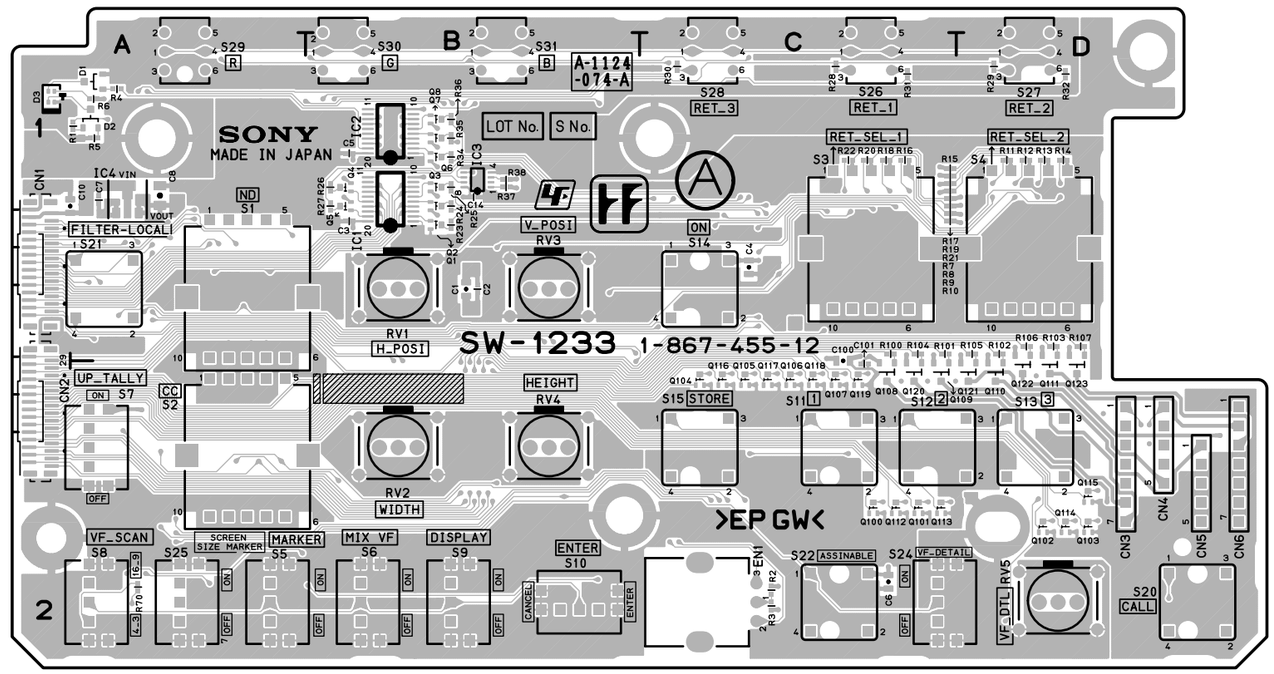


SW-1233 -A SIDE-
SUFFIX: -12

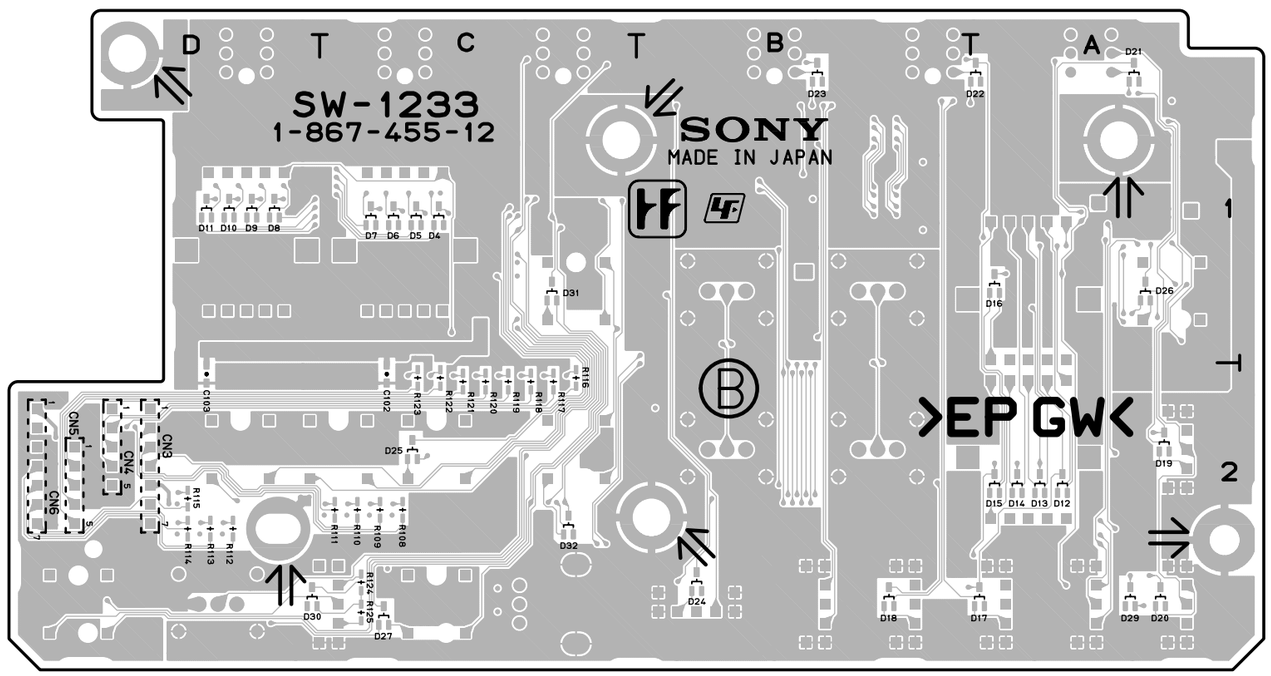


SW-1233 -B SIDE-
SUFFIX: -12

SW-1233 (1-867-455-13)

C1	B1	Q120	C2	S21	A1
C2	B1	Q121	D2	S22	C2
C3	B1	Q122	D2	S24	C2
C4	C1	Q123	D2	S25	A2
C5	B1			S26	C1
C6	C2	R1	A1	S27	D1
C7	A1	R2	C2	S28	C1
C8	A1	R3	C2	S29	A1
C10	A1	R4	A1	S30	B1
C11	C2	R5	A1	S31	B1
C12	C2	R6	A1		
C14	B1	R7	C1	*:B SIDE	
C100	C2	R8	C1		
C101	C2	R9	C1		
C102	*C2	R10	C1		
C103	*D2	R11	D1		
		R12	D1		
CN1	A1	R13	D1		
CN2	A2	R14	D1		
CN3	D2	R15	C1		
CN4	D2	R16	C1		
CN5	D2	R17	C1		
CN6	D2	R18	C1		
		R19	C1		
D1	A1	R20	C1		
D2	A1	R21	C1		
D3	A1	R22	C1		
D4	*C1	R23	B1		
D5	*C1	R24	B1		
D6	*C1	R25	B1		
D7	*C1	R26	B1		
D8	*D1	R27	B1		
D9	*D1	R28	C1		
D10	*D1	R29	D1		
D11	*D1	R30	C1		
D12	*A2	R31	C1		
D13	*A2	R32	D1		
D14	*A2	R34	B1		
D15	*A2	R35	B1		
D16	*A1	R36	B1		
D17	*A2	R37	B1		
D18	*B2	R38	B1		
D19	*A2	R70	A2		
D20	*A2	R100	C1		
D21	*A1	R101	C1		
D22	*A1	R102	D1		
D23	*B1	R103	D1		
D24	*B2	R104	C1		
D25	*C2	R105	D1		
D26	*A1	R106	D1		
D27	*C2	R107	D1		
D29	*A2	R108	*C2		
D30	*D2	R109	*C2		
D31	*C1	R110	*C2		
D32	*C2	R111	*C2		
		R112	*D2		
EN1	C2	R113	*D2		
		R114	*D2		
IC1	B1	R115	*D2		
IC2	B1	R116	*C2		
IC3	B1	R117	*C2		
IC4	A1	R118	*C2		
IC5	C2	R119	*C2		
		R120	*C2		
Q1	B1	R121	*C2		
Q2	B1	R122	*C2		
Q3	B1	R123	*C2		
Q4	B1	R124	*C2		
Q5	B1	R125	*C2		
Q6	B1				
Q7	B1	RV1	B1		
Q8	B1	RV2	B2		
Q100	C2	RV3	B1		
Q101	C2	RV4	B2		
Q102	D2	RV5	D2		
Q103	D2				
Q104	C2	S1	A1		
Q105	C2	S2	A2		
Q106	C2	S3	C1		
Q107	C2	S4	D1		
Q108	C2	S5	A2		
Q109	C2	S6	B2		
Q110	D2	S7	A2		
Q111	D2	S8	A2		
Q112	C2	S9	B2		
Q113	C2	S10	B2		
Q114	D2	S11	C2		
Q115	D2	S12	C2		
Q116	C2	S13	D2		
Q117	C2	S14	C1		
Q118	C2	S15	C2		
Q119	C2	S20	D2		

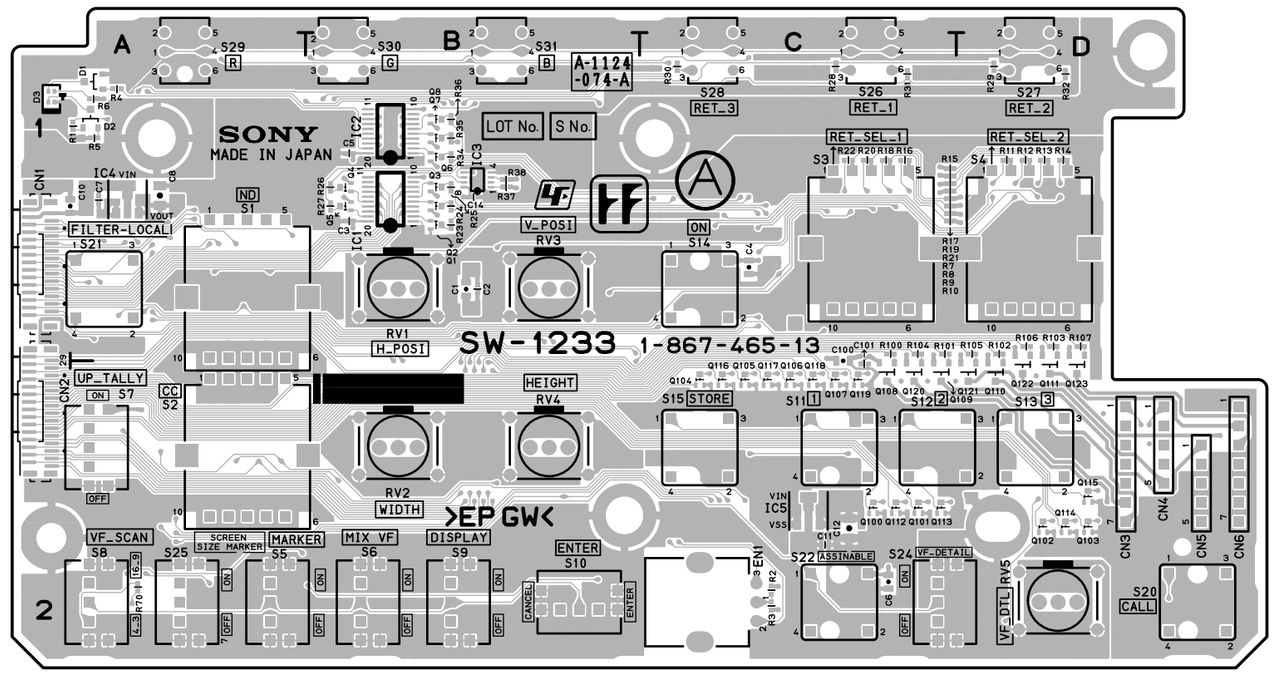


SW-1233 -A SIDE-
SUFFIX: -13

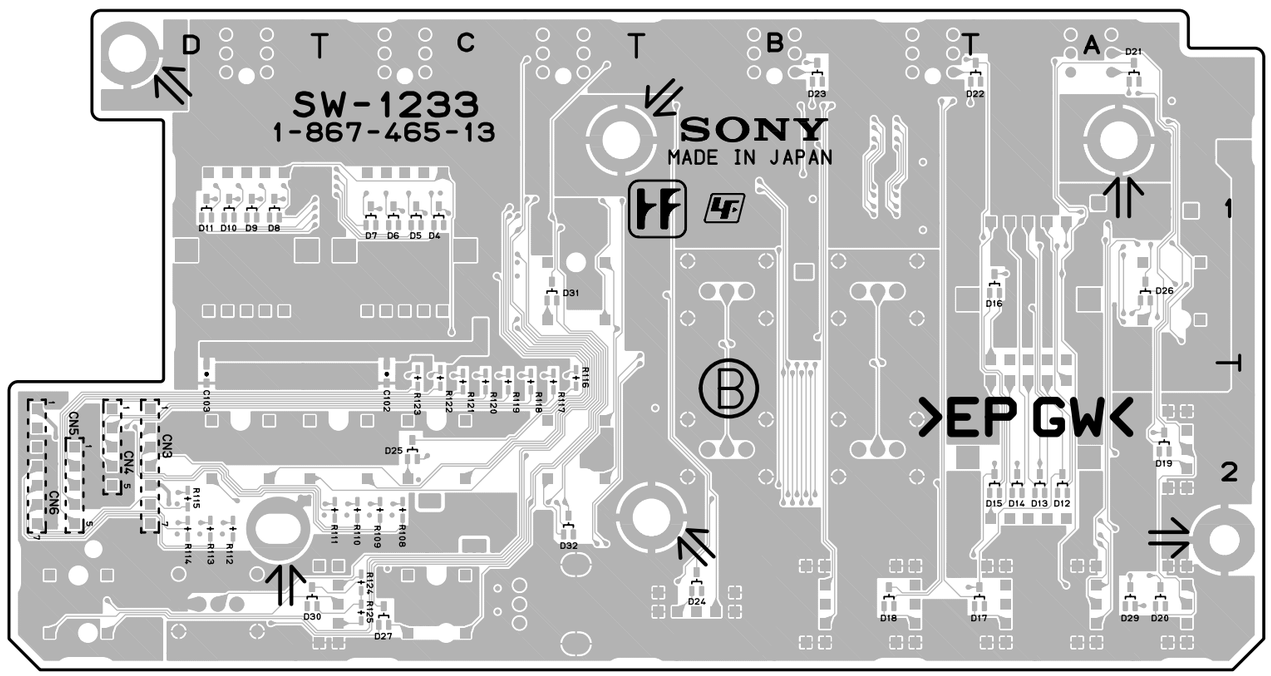


SW-1233 -B SIDE-
SUFFIX: -13


SW-1236, SW-1237, SW-1238, SW-1239, SW-1240, SW-1242, SW-1245

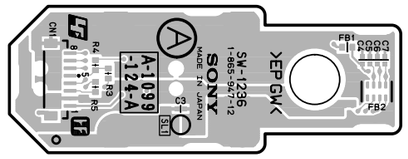


SW-1236 -A SIDE-
SUFFIX: -12

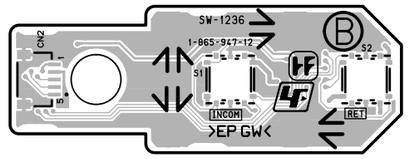

SW-1236 -B SIDE-
SUFFIX: -12




SW-1238 -A SIDE-
SUFFIX: -12




SW-1238 -B SIDE-
SUFFIX: -12

SW-1237 (1-865-948-13)


C1	A1	R6	A2
C2	A2	R9	B1
C3	B1	R10	B1
C4	B2	R15	*A2
C5	A2	R16	*A2
C6	A2	R18	A2
C7	A2	R19	A2
C8	A2	R20	A2
C10	B1	R21	B1
C11	*A1	R22	B1
C12	A2		
C13	A2	RB1	B2
C14	A2	RB3	*A1
		RB4	A2
CN1	*A2	RB7	B2
CN2	*B2	RB9	B1
		RB10	B2
D1	*A2		
		S1	A1
IC1	*B1	S2	A1
IC2	B2	S3	B1
IC3	B2	S4	B1
R1	A1	SL1	A2
R2	A2	SL2	A2
R3	B1		
R4	B2	*:B SIDE	
R5	A2		

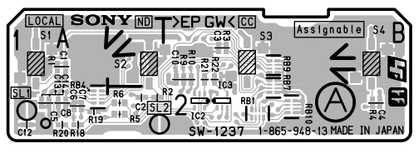


SW-1237 -A SIDE-
SUFFIX: -13

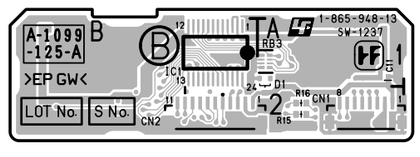

SW-1237 -B SIDE-
SUFFIX: -13

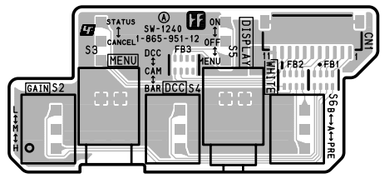


SW-1240 -A SIDE-
SUFFIX: -12

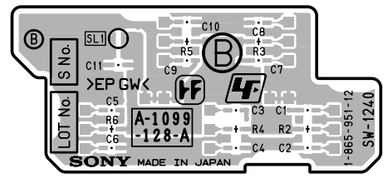


SW-1240 -B SIDE-
SUFFIX: -12

SW-1239 (1-865-950-12)


C1	*A1	R2	*A1
C2	*B1	R3	A1
C3	*A1	R4	*A1
C4	*A1	R5	*A1
C5	A2	R6	A1
C6	*A1	R7	*B2
C7	A2	R8	A1
C8	*A1	R9	*A2
C10	*B2	R10	*A2
C11	*A2	R11	*B1
C12	*A2	R12	A2
C13	*A2		
C14	*B1	RV1	B2
C15	*B1		
C16	*A2	S1	A2
		S2	A1
CN3	A2	S3	B1
		S4	A2
FB1	A2		
FB2	A2	SL1	*B2
IC1	A1	VS1	A1
		VS2	B1
Q1	A1		
		*:B SIDE	
R1	*A1		

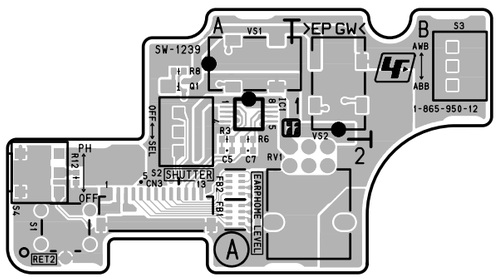


SW-1239 -A SIDE-
SUFFIX: -12

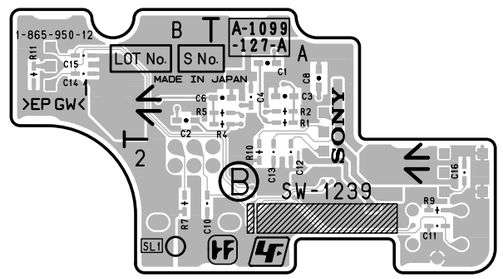


SW-1239 -B SIDE-
SUFFIX: -12



SW-1242 -A SIDE-
SUFFIX: -13



SW-1242 -B SIDE-
SUFFIX: -13



SW-1245 -A SIDE-
SUFFIX: -13




SW-1245 -B SIDE-
SUFFIX: -13


5-34

SW-1241 (1-865-952-15)

C1	*B2	FB3	B1	R25	C2
C2	*B2	FB4	B1		
C3	*B2	FB5	C1	RB1	C1
C4	*A2			RB2	C1
C5	*A2	IC1	B1	RB3	B1
C6	*A1			RB4	B1
C7	*B1	LP1	*A2	RB5	C1
C8	*B2	LP2	*C2	RB6	C1
C9	*C2			RB7	B1
C10	*A2	R1	*A1	RB8	B1
C11	*B2	R2	*B1		
C12	B1	R3	*B2	RV1	A1
C13	*B1	R4	*C2	RV2	B1
C14	*B1	R5	*A2	RV3	B1
C15	*B1	R6	*C2	RV4	C1
C16	*C1	R7	*A2	RV5	A2
C17	*C1	R8	*B2	RV6	C2
C18	*C2	R9	*B1		
C19	*C2	R10	*B1	S3	C1
C20	*B2	R11	*C1	S7	A2
C21	*B2	R12	*B1	S8	B2
		R13	B1	S9	B2
CN1	B1	R14	B1	S10	C2
		R15	*C1		
D8	*C1	R16	*B1	SL1	*B2
D9	*B1	R17	*A2		
		R18	*A2	*:B SIDE	
FB1	C1	R23	C1		
FB2	B1	R24	B2		

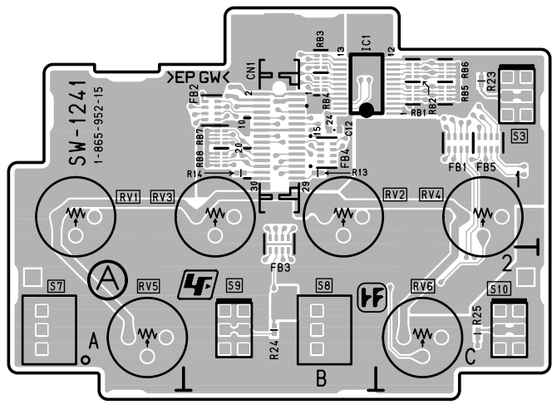


SW-1241 -A SIDE-
SUFFIX: -15

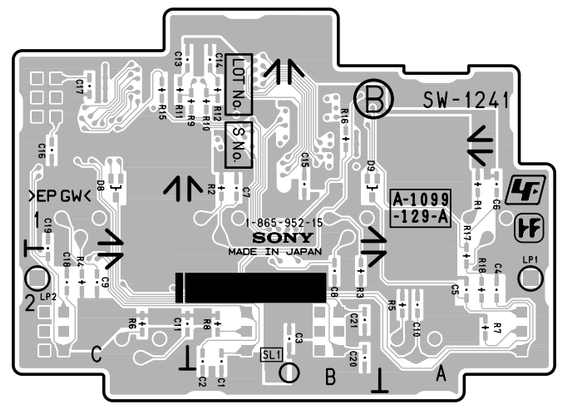


SW-1241 -B SIDE-
SUFFIX: -15

SW-1241 (1-865-952-13)

C1	*B2	FB1	C1	RB2	C1
C2	*B2	FB2	B1	RB3	B1
C3	*B2	FB3	B1	RB4	B1
C4	*A2	FB4	B1	RB5	C1
C5	*A2	FB5	C1	RB6	C1
C6	*A1			RB7	B1
C7	*B1	IC1	B1	RB8	B1
C8	*B2				
C9	*C2	R1	*A1	RV1	A1
C10	*A2	R2	*B1	RV2	B1
C11	*C2	R3	*B2	RV3	B1
C12	B1	R4	*C2	RV4	C1
C13	*C1	R5	*A2	RV5	A2
C14	*B1	R6	*C2	RV6	C2
C15	*B1	R7	*A2		
C16	*C1	R8	*B2	S3	C1
C17	*C1	R9	*B1	S7	A2
C18	*C2	R10	*B1	S8	B2
C19	*C1	R11	*C1	S9	B2
C20	*B2	R12	*B1	S10	C2
C21	*B2	R23	C1		
		R24	B2	SL1	*B2
CN1	B1	R25	C2		
				*:B SIDE	
D8	*C1	RB1	C1		

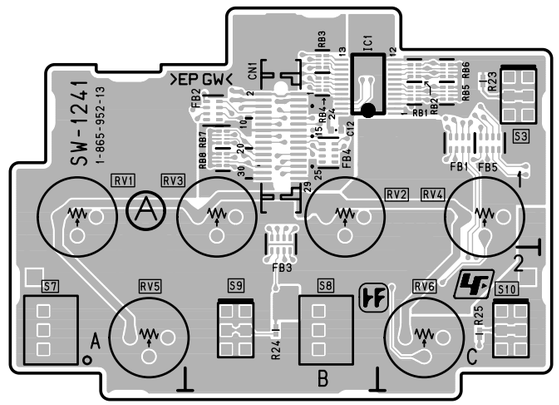


SW-1241 -A SIDE-
SUFFIX: -13

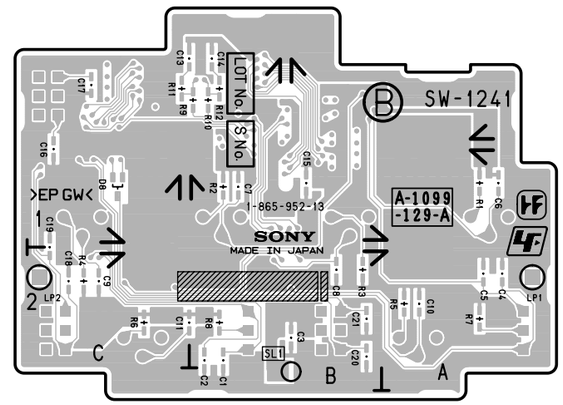


SW-1241 -B SIDE-
SUFFIX: -13

SW-1273 (1-865-946-21)

C1	*A1	D2	C1	R1	C1	RB3	*B1
C2	*A1	D3	C1	R2	B1	RB4	*B1
C3	*C1	D4	B1	R3	C1	RB5	*C1
C4	C2	D5	C1	R4	C1	RB6	*B1
C5	C2	D6	B2	R5	C1	RB7	B1
C6	A2	D7	C2	R6	C2	RB8	B1
C7	A2	D8	C2	R7	C1		
C8	*C2	D9	*A1	R8	B2	S1	A1
C9	*C2	D10	C2	R9	C2	S2	B1
C10	*C1	D11	A1	R10	C2	S5	B1
C11	*C1	D12	B1	R11	C2	S6	C1
C12	A1	D13	A1	R12	A1		
C13	B1	D14	B1	R13	B1	SL1	*B2
C14	A1	D15	A2	R14	A1		
C15	B1	D16	B2	R15	A1	*:B SIDE	
C16	B1	D17	A2	R16	A2		
C17	B1	D18	A2	R17	A2		
C18	C1	D19	B2	R18	A2		
C19	*C1	D20	B2	R19	A2		
C20	*C1			R20	B2		
C21	*C1	FB1	C1	R21	A1		
C31	*B2	FB2	B1	R22	C1		
		FB3	*B1	R23	B2		
CN1	*A1	FB4	C1	R28	A1		
CN2	*B1			R32	*B1		
CN3	*A1	IC1	*B1	R33	C1		
CN4	*C1						
		Q1	C2	RB1	*C1		
D1	C1	Q2	A2	RB2	*B1		

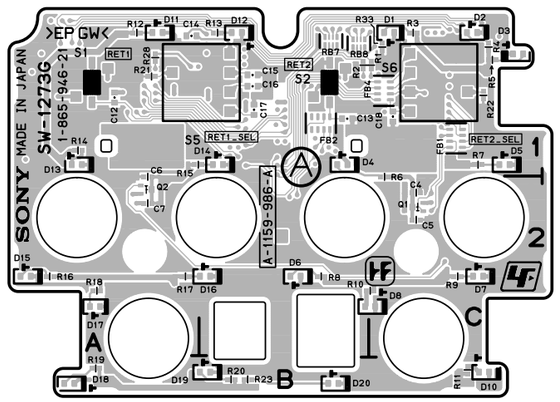


SW-1273 -A SIDE-
SUFFIX: -21

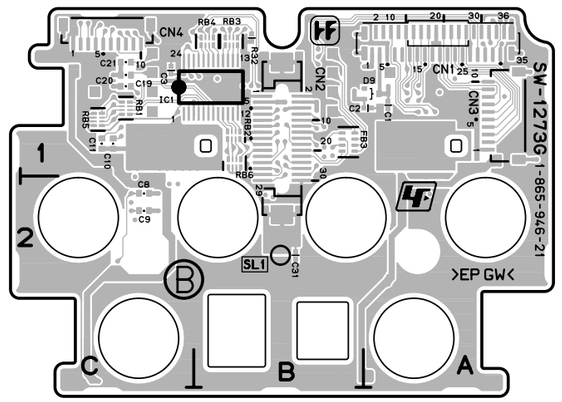


SW-1273 -B SIDE-
SUFFIX: -21

SW-1273 (1-865-946-13)

C1	*A1	D2	C1	R3	C1	R48	A2
C2	*A1	D3	C2	R4	C1	R49	A2
C3	*C1	D4	C1	R5	C1	R50	A2
C4	C2	D5	B2	R6	C1	R51	A2
C5	C2	D6	C2	R7	C2	R52	B2
C6	A2	D7	B2	R8	C2	R53	B2
C7	A2	D9	*A1	R9	C1		
C8	*C2	D10	A1	R10	C1	RB1	*C1
C9	*C2	D11	A1	R11	B2	RB2	*B1
C10	*C1	D12	B1	R12	B2	RB3	*B1
C11	*C1	D13	A2	R13	C2	RB4	*B1
C12	A1	D14	B2	R14	C2	RB5	*C1
C13	B1	D15	A2	R15	C2	RB6	*B1
C14	B1	D16	B2	R16	C2	RB7	B1
C15	B1			R21	A1	RB8	B1
C16	B1	FB1	C1	R22	C1		
C17	B1	FB2	B1	R28	A1	S1	A1
C18	C1	FB3	*B1	R30	*C1	S2	B1
C19	*C1	FB4	C1	R31	*C1	S5	B1
C20	*C1			R32	*C1	S6	C1
C21	*C1	IC1	*B1	R33	C1		
C31	*B2			R40	A1	SL1	*B2
		Q1	C2	R41	A1		
CN1	*A1	Q2	C2	R42	A1	*:B SIDE	
CN2	*B1	Q3	A2	R43	A1		
CN3	*A1	Q4	A2	R44	B1		
CN4	*C1			R45	B1		
		R1	C1	R46	A2		
D1	C1	R2	B1	R47	A2		

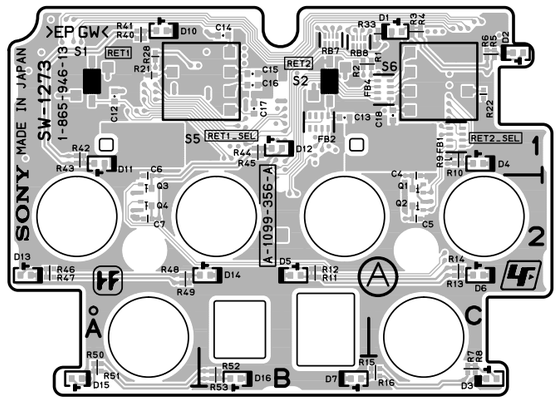


SW-1273 -A SIDE-
SUFFIX: -13

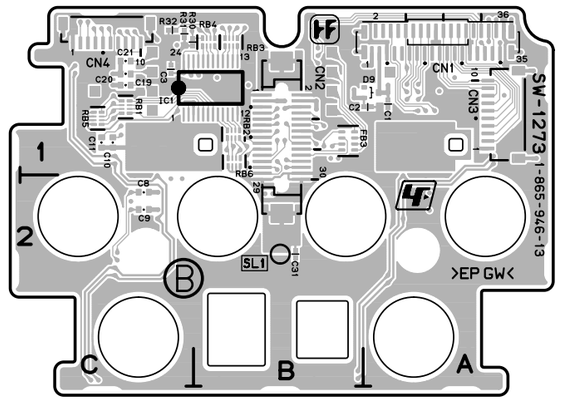


SW-1273 -B SIDE-
SUFFIX: -13

TG-243 (1-865-972-14)

C1	C1	C93	*A2	C185	B2	L3	C1
C2	C1	C94	A1	C186	B2	L4	B1
C3	*C1	C95	*B1	C187	B2	L5	C1
C4	*C1	C96	*B2	C188	B2	L6	C2
C5	*C1	C97	*A1	C189	*A2	L7	C1
C6	*C1	C98	*A1	C190	*A2	L8	C1
C7	*C1	C99	*A1	C191	A2	L9	*B1
C8	*C1	C100	*B1	C192	*A2	L10	*C2
C9	*C1	C101	*B1	C193	A2	L11	*C2
C10	*C1	C102	*B1	C194	*A2	L12	*C1
C11	*C1	C103	*B1	C195	A2	L13	*C1
C12	*C1	C104	*B1	C196	A2	L14	A1
C13	C1	C105	*A1	C197	*B1	L15	*B1
C14	*C1	C106	*A1	C198	*B2	L16	B1
C15	C1	C107	*A1	C199	*B1	L17	*B1
C16	*C1	C108	*B1	C200	*B1		
C17	C1	C109	*A2	C201	*B1	Q1	C1
C18	*C1	C110	*A1	C202	*A2	Q2	*C1
C19	*C1	C111	*A1	C203	A1	Q3	C1
C20	C1	C112	*A1	C204	A1	Q4	*C1
C21	*C1	C113	*A1	C205	*C1	Q5	*C1
C22	*C1	C114	*A1	C206	*A2	Q6	*C1
C23	*C1	C115	*B1	C207	*A2	Q7	*B1
C24	*C1	C116	*A1	C208	*B2	Q8	*B1
C25	B1	C117	*A2	C209	*A2	Q9	*B1
C26	C1	C118	B1	C210	*A2	Q10	*B1
C27	*B1	C119	*B1			Q11	*C1
C28	*B1	C120	*B1	CL1	C2	Q12	*C1
C29	*B1	C121	B2	CL2	C2		
C30	*C1	C122	*B1	CL3	C2	R1	*C1
C31	*B1	C123	A1	CL6	C1	R2	*C1
C32	*C2	C124	*B2	CL8	C1	R3	*C1
C33	*C2	C125	*B1	CL9	B2	R4	*C1
C34	*B1	C126	*B1	CL10	B2	R5	*C1
C35	B1	C127	*B1	CL11	A2	R6	*C1
C36	*B2	C128	*B2	CL12	A2	R7	*C1
C37	*C2	C129	*A1			R8	*C1
C38	*C1	C130	*A1	CN1	C1	R9	*C1
C39	B1	C131	*A1	CN2	B1	R10	*C1
C40	*B1	C132	*A1	CN3	*C2	R11	*C1
C41	C2	C133	*B1			R12	*C1
C42	C1	C134	*A1	D1	B2	R13	*C1
C43	B1	C135	*A1			R14	*B1
C44	*B1	C136	*A1	E1	B2	R15	C1
C45	C1	C137	*A1			R16	*C1
C46	*B2	C138	*B1	IC1	*C1	R17	*C1
C47	*B2	C139	*B1	IC2	*C1	R18	C1
C48	*B2	C140	*B1	IC3	*C1	R19	C1
C49	*C1	C141	*A2	IC4	*B1	R20	*C1
C50	*B2	C142	*A2	IC5	*B2	R21	*C1
C51	*B1	C143	*A2	IC6	B2	R22	*C1
C52	*B2	C144	*A1	IC7	*B2	R23	*C1
C53	*B2	C145	*A1	IC8	*C2	R24	C1
C54	*C1	C146	B2	IC9	C2	R25	*C1
C55	*B1	C147	*B2	IC10	*C1	R26	*C1
C56	*B1	C148	*B2	IC11	*C1	R27	*C1
C57	C1	C149	B2	IC12	C1	R28	*C1
C58	*C1	C150	B2	IC13	C2	R29	*C1
C59	B2	C151	B2	IC14	*C1	R30	*B1
C60	*C2	C152	B2	IC15	*B1	R31	*B1
C61	*C2	C153	A2	IC16	*C1	R32	*C1
C62	*C2	C154	A2	IC17	A1	R33	*C1
C63	*C1	C155	*B2	IC18	*A1	R34	*B1
C64	*C2	C156	*B2	IC19	*A2	R35	*C1
C65	*C2	C157	*A2	IC20	A2	R36	*B1
C66	*C2	C158	A2	IC21	*A2	R37	*B1
C67	*C2	C159	B2	IC22	B2	R38	*C1
C68	*C2	C160	*B2	IC23	B2	R39	*C2
C69	*C2	C161	B2	IC24	B2	R40	*C2
C70	*C2	C162	*B2	IC25	B2	R41	*B1
C71	*C1	C163	B2	IC26	B2	R42	*B1
C72	*C1	C164	B2	IC27	A2	R43	*B1
C73	*C1	C165	*A2	IC28	A2	R44	*B1
C74	*C2	C166	*A2	IC29	A2	R45	*B1
C75	*C1	C167	A2	IC30	A2	R46	*B1
C76	*C2	C168	*A2	IC31	A2	R47	*B2
C77	*C2	C169	*A2	IC32	A2	R48	*B2
C78	*C2	C170	B2	IC33	A2	R49	*B2
C79	*C2	C171	B2	IC34	A2	R50	*B2
C80	*C2	C172	B2	IC35	A2	R51	*B2
C81	*C2	C173	B2	IC36	A2	R52	*B2
C82	*C2	C174	*A2	IC37	A1	R53	B2
C83	*C2	C175	*A2	IC38	A1	R54	B2
C84	*C2	C176	A2	IC39	A1	R55	*B2
C85	A1	C177	*A2	IC40	B1	R56	*B2
C86	A1	C178	A2	IC41	*A1	R57	*B2
C87	*A1	C179	*A2	IC42	*B1	R58	*B2
C88	*A1	C180	A2	IC43	*B2	R59	*B2
C89	A1	C181	A2	IC44	*A2	R60	B1
C90	*A2	C182	A2			R61	B1
C91	*A2	C183	*A2	L1	B1	R62	*C1
C92	*A1	C184	*A2	L2	C1	R63	*C1

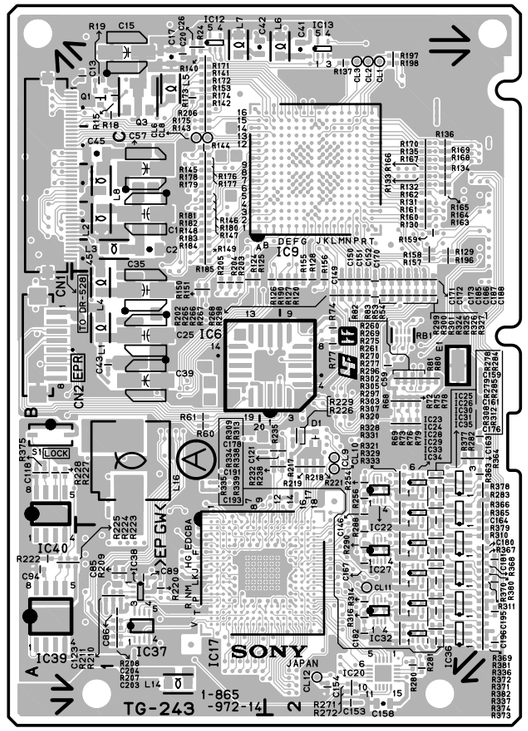

TG-243 -A SIDE-
SUFFIX: -14

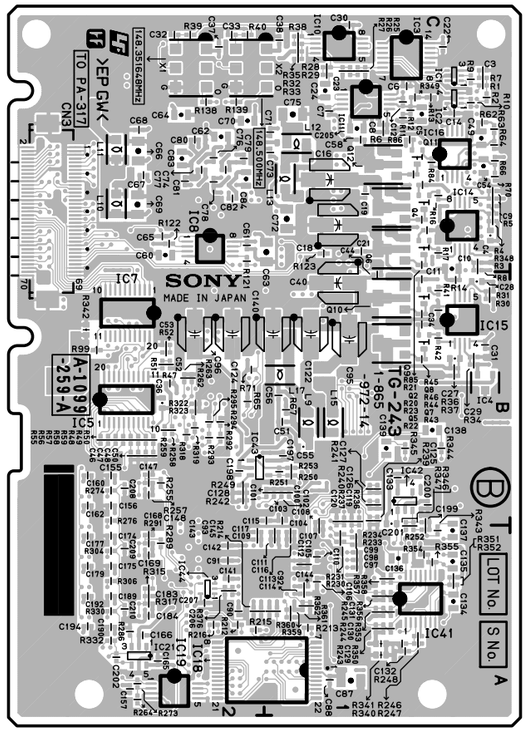


TG-243 -B SIDE-
SUFFIX: -14


R64	*C1	R202	B2	R295	*B2	X1	*C2
R65	*B2	R203	B1	R296	A2	X2	*C2
R66	*C1	R204	B1	R297	A2		
R67	*B1	R205	B1	R298	B2	*:B SIDE	
R68	B2	R206	C1	R299	B2		
R69	B2	R207	A1	R300	B2		
R70	*C1	R208	A1	R301	B2		
R71	*B2	R209	A1	R302	A2		
R72	B2	R210	A1	R303	A2		
R73	B2	R211	A1	R304	*A2		
R74	B2	R212	*A2	R305	A2		
R75	B2	R213	*A1	R306	*A2		
R76	B2	R214	*A1	R307	A2		
R77	B2	R215	*A2	R308	A2		
R78	B2	R216	*A2	R309	A2		
R79	B2	R217	B2	R310	A2		
R80	B2	R218	B2	R311	A2		
R81	B2	R219	B2	R312	A2		
R82	B2	R220	A1	R313	A2		
R83	B2	R221	B2	R314	A2		
R84	*C1	R222	A1	R315	*A2		
R85	*C1	R223	A1	R316	A2		
R86	*C1	R224	A1	R317	*A2		
R99	*B2	R225	A1	R318	*B2		
R120	B2	R226	B2	R319	*B2		
R121	*C2	R227	B1	R320	A2		
R122	*C2	R228	B1	R321	A2		
R123	*C1	R229	B2	R322	*B2		
R124	B1	R230	*A1	R323	*B2		
R125	B1	R231	*A1	R324	B2		
R126	B2	R232	B2	R325	B2		
R127	B2	R233	*A1	R326	B2		
R128	B2	R234	*A1	R327	B2		
R129	C2	R235	B2	R328	A2		
R130	C2	R236	*B1	R329	A2		
R131	C2	R237	*B1	R330	*A2		
R132	C2	R238	B2	R331	A2		
R133	C2	R239	*B1	R332	*A2		
R134	C2	R240	*B1	R333	A2		
R135	C2	R241	*B1	R334	A2		
R136	C2	R242	*B2	R335	A2		
R137	C2	R243	*A1	R336	A2		
R138	*C2	R244	*A1	R337	A2		
R139	*C2	R245	*A1	R338	A2		
R140	C1	R246	*A1	R339	A2		
R141	C1	R247	*A1	R340	*A1		
R142	C1	R248	*A1	R341	*A1		
R143	C1	R249	*B2	R342	*B2		
R144	C1	R250	*B1	R343	*A1		
R145	C1	R251	*B1	R344	*B1		
R146	C1	R252	*A1	R345	*B1		
R147	C1	R253	*B1	R346	*A1		
R148	C1	R254	B2	R347	*A1		
R149	C1	R255	*B2	R348	*C1		
R150	B1	R256	B2	R349	*C1		
R151	B1	R257	*B2	R350	*A1		
R153	C1	R258	*B2	R351	*A1		
R155	B2	R259	*B2	R352	*A1		
R156	B2	R260	B2	R353	*A1		
R157	C2	R261	B2	R354	*A1		
R158	C2	R262	*B2	R355	*A1		
R159	C2	R263	*B2	R356	*A1		
R160	C2	R264	*A2	R357	*A1		
R161	C2	R265	B2	R358	*A1		
R162	C2	R266	B2	R359	*A1		
R163	C2	R267	B2	R360	*A1		
R164	C2	R268	B2	R361	*A1		
R165	C2	R269	B2	R362	*A1		
R166	C2	R270	B2	R363	B2		
R167	C2	R271	A2	R364	B2		
R168	C2	R272	A2	R365	B2		
R169	C2	R273	*A2	R366	B2		
R170	C2	R274	*B2	R367	A2		
R171	C1	R275	B2	R368	A2		
R172	C1	R276	*B2	R369	A2		
R173	C1	R277	B2	R370	A2		
R174	C1	R278	B2	R371	A2		
R175	C1	R279	B2	R372	A2		
R176	C1	R280	A2	R373	A2		
R177	C1	R281	A2	R374	A2		
R178	C1	R282	B2	R375	B1		
R179	C1	R283	B2	R376	*A2		
R180	C1	R284	B2	R377	B2		
R181	C1	R285	B2	R378	B2		
R182	C1	R286	*A2	R379	A2		
R183	C1	R288	A2	R380	A2		
R184	C1	R289	*A2	R381	A2		
R185	C1	R290	A2	R382	A2		
R190	B2	R291	*A2				
R196	C2	R292	*B2	RB1	B2		
R197	C2	R293	*B2				
R198	C2	R294	*B2	S1	B1		

TG-247 (1-865-960-11)

C1	C1	C93	*A2	C185	*A2	IC34	A2
C2	C1	C94	A1	C186	A2	IC35	A2
C3	*C1	C95	*B1	C187	*A2	IC36	A2
C4	*C1	C96	*B2	C188	A2	IC37	A1
C5	*C1	C97	*A1	C189	A2	IC38	A1
C6	*C1	C98	*A1	C190	*B1	IC39	A1
C7	*C1	C99	*A1	C191	*B2	IC40	B1
C8	*C1	C100	*B1	C192	*B1	IC41	*A1
C9	*C1	C101	*B1	C193	*B1	IC42	*A1
C10	*B1	C102	*B1	C194	*A1	IC43	*B2
C11	*B1	C103	*B1	C195	*A1	IC44	*B1
C12	*C1	C104	*A1	C196	*A1	IC45	*B1
C13	C1	C105	*A1	C197	*B1	IC46	*B1
C14	*C1	C106	*A1	C198	*A1	IC47	*A2
C15	C1	C107	*A1	C199	A1		
C16	*C1	C108	*A1	C200	A1	L1	B1
C17	C1	C109	*A2	C201	*A2	L2	C1
C18	*C1	C110	*A1	C202	B1	L3	C1
C19	*C1	C111	*A1	C203	*B1	L4	B1
C20	C1	C112	*A1	C204	B1	L5	C1
C21	*C1	C113	*A1	C205	*B1	L6	C2
C22	*C1	C114	*A1	C206	*B1	L7	C1
C23	*C1	C115	*A1	C207	*B1	L8	C1
C24	*C1	C116	*A1	C208	*B1	L9	*B1
C25	B1	C117	*A2	C209	*B1	L10	*C2
C26	C1	C118	B1	C210	*B1	L11	*C2
C27	*B1	C119	*A1	C211	*B1	L12	*C1
C28	*B1	C120	*A1	C212	*B1	L13	*C1
C29	*B1	C121	B2	C213	*A1	L14	A1
C30	*C1	C122	*B1	C214	*B1	L15	*B1
C31	*B1	C123	A1	C215	*B1	L16	B1
C32	*C2	C124	*B2	C216	*C1	L17	*B1
C33	*C2	C125	*B2	C217	*B2		
C34	*B1	C126	*A1	C218	*A2	Q1	C1
C35	B1	C127	*A1	C219	*A2	Q2	*C1
C36	*B2	C128	*A1	C220	*A2	Q3	C1
C37	*C2	C129	*A1	C221	*A2	Q4	*C1
C38	*C1	C130	*A1			Q5	*C1
C39	B1	C131	*A1	CL1	C2	Q6	*C1
C40	*B1	C132	*A1	CL2	C2	Q7	*B1
C41	C2	C133	*B1	CL3	C2	Q8	*B1
C42	C1	C134	*A2	CL4	C2	Q9	*B1
C43	B1	C135	*A2	CL5	C2	Q10	*B1
C44	*B1	C136	*A2	CL6	C2	Q11	*C1
C45	C1	C137	*A1	CL7	C2	Q12	*C1
C46	*B2	C138	*A1	CL8	C2		
C47	*B2	C139	B2	CL9	B2	R1	*C1
C48	*B2	C140	*B2	CL10	B2	R2	*C1
C49	*C1	C141	*B2	CL11	A2	R3	*C1
C50	*B2	C142	B2	CL12	A2	R4	*C1
C51	*B1	C143	B2			R5	*C1
C52	*B2	C144	B2	CN1	C1	R6	*C1
C53	*B2	C145	B2	CN2	B1	R7	*C1
C54	*C1	C146	A2	CN3	*C2	R8	*B1
C55	*B1	C147	A2			R9	*C1
C56	*B1	C148	*B2	D1	B2	R10	*C1
C57	C1	C149	*B2			R11	*C1
C58	*C1	C150	*A2	E1	B2	R12	*C1
C59	B2	C151	A2			R13	*C1
C60	*B2	C152	B2	IC1	*C1	R14	*B1
C61	*C2	C153	*B2	IC2	*C1	R15	C1
C62	*C2	C154	A2	IC3	*C1	R16	*C1
C63	*B1	C155	*B2	IC4	*B1	R17	*C1
C64	*C2	C156	B2	IC5	*B2	R18	C1
C65	*C2	C157	A2	IC6	B2	R19	C1
C66	*C2	C158	*A2	IC7	*B2	R20	*C1
C67	*C2	C159	*A2	IC8	*C2	R21	*C1
C68	*C2	C160	A2	IC9	C2	R22	*B1
C69	*C2	C161	*A2	IC10	*C1	R23	*C1
C70	*C2	C162	*A2	IC11	*C1	R24	C1
C71	*C1	C163	B2	IC12	C1	R25	*C1
C72	*C1	C164	B2	IC13	C2	R26	*C1
C73	*C1	C165	B2	IC14	*C1	R27	*C1
C74	*C2	C166	B2	IC15	*B1	R28	*C1
C75	*C1	C167	*A2	IC16	*C1	R29	*C1
C76	*C2	C168	*A2	IC17	A1	R30	*B1
C77	*C2	C169	A2	IC18	*A1	R31	*B1
C78	*C2	C170	*A2	IC19	*A2	R32	*C1
C79	*C2	C171	A2	IC20	A2	R33	*C1
C80	*C2	C172	*A2	IC21	*A2	R34	*B1
C81	*C2	C173	A2	IC22	B2	R35	*C1
C82	*C2	C174	A2	IC23	B2	R36	*B1
C83	*C2	C175	A2	IC24	B2	R37	*B1
C84	*C2	C176	*A2	IC25	B2	R38	*C1
C85	A1	C177	*A2	IC26	B2	R39	*C2
C86	A1	C178	B2	IC27	A2	R40	*C2
C87	*A1	C179	B2	IC28	A2	R41	*B1
C88	*A1	C180	B2	IC29	A2	R42	*B1
C89	A1	C181	B2	IC30	A2	R43	*B1
C90	*A2	C182	*A2	IC31	A2	R44	*B1
C91	*A2	C183	*A2	IC32	A2	R45	*B1
C92	*A1	C184	A2	IC33	A2	R46	*B1

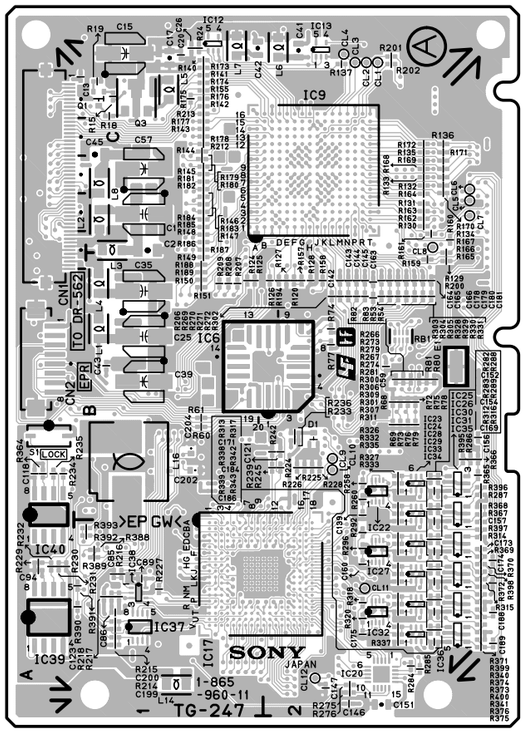

TG-247 -A SIDE-
SUFFIX: -11

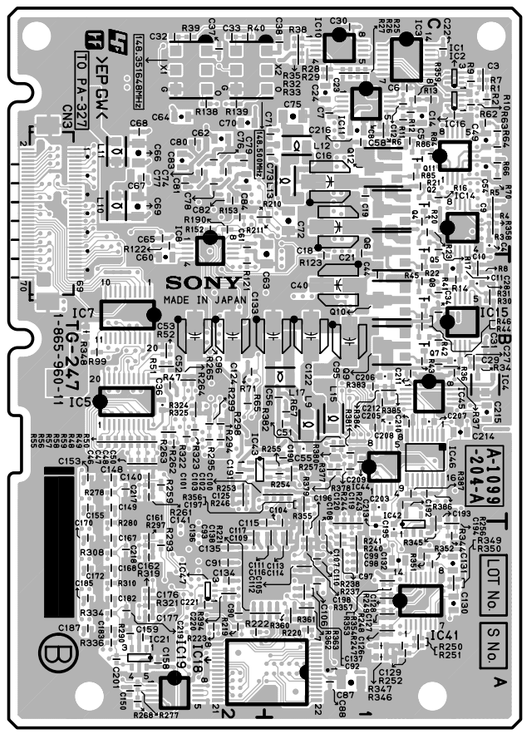


TG-247 -B SIDE-
SUFFIX: -11


R47	*B2	R173	C1	R276	A2	R369	A2
R48	*B2	R174	C1	R277	*A2	R370	A2
R49	*B2	R175	C1	R278	*B2	R371	A2
R50	*B2	R176	C1	R279	B2	R372	A2
R51	*B2	R177	C1	R280	*A2	R373	A2
R52	*B2	R178	C1	R281	A2	R374	A2
R53	B2	R179	C1	R282	B2	R375	A2
R54	B2	R180	C1	R283	B2	R376	A2
R55	*B2	R181	C1	R284	A2	R377	*B1
R56	*B2	R182	C1	R285	A2	R378	*B1
R57	*B2	R183	C1	R286	B2	R379	*B1
R58	*B2	R184	C1	R287	B2	R380	*B1
R59	*B2	R185	C1	R288	B2	R381	*B1
R60	B1	R186	C1	R289	B2	R382	*B1
R61	B1	R187	C1	R290	*A2	R383	*B1
R62	*C1	R188	B1	R292	A2	R384	*B1
R63	*C1	R189	B1	R293	*A2	R385	*B1
R64	*C1	R190	*C2	R294	*B2	R386	*B1
R65	*B2	R194	B2	R295	*B2	R387	*B1
R66	*C1	R200	B2	R296	A2	R388	A1
R67	*B1	R201	C2	R297	*A2	R389	A1
R68	B2	R202	C2	R298	*B2	R390	A1
R69	B2	R206	B2	R299	*B2	R391	A1
R70	*C1	R207	B1	R300	A2	R392	A1
R71	*B2	R208	B1	R301	A2	R393	A1
R72	B2	R209	B1	R302	B2	R394	*A2
R73	B2	R210	*C2	R303	B2	R395	B2
R74	B2	R211	*C1	R304	B2	R396	B2
R75	B2	R212	C1	R305	B2	R397	A2
R76	B2	R213	C1	R306	A2	R398	A2
R77	B2	R214	A1	R307	A2	R399	A2
R78	B2	R215	A1	R308	*A2	R400	A2
R79	B2	R216	A1	R309	A2		
R80	B2	R217	A1	R310	*A2	RB1	B2
R81	B2	R218	A1	R311	A2		
R82	B2	R219	*A2	R312	A2	S1	B1
R83	B2	R220	*A1	R313	A2		
R84	*C1	R221	*A1	R314	A2	X1	*C2
R85	*C1	R222	*A2	R315	A2	X2	*C2
R86	*C1	R223	*A2	R316	A2		
R99	*B2	R224	B2	R317	A2	*:B SIDE	
R120	B2	R225	B2	R318	A2		
R121	*B2	R226	B2	R319	*A2		
R122	*C2	R227	A1	R320	A2		
R123	*B1	R228	B2	R321	*A2		
R124	B1	R229	A1	R322	*B2		
R125	B1	R230	A1	R323	*B2		
R126	B2	R231	A1	R324	*B2		
R127	B2	R232	A1	R325	*B2		
R128	B2	R233	B2	R326	A2		
R129	B2	R234	B1	R327	A2		
R130	C2	R235	B1	R328	B2		
R131	C2	R236	B2	R329	B2		
R132	C2	R237	*A1	R330	B2		
R133	C2	R238	*A1	R331	B2		
R134	C2	R239	B2	R332	A2		
R135	C2	R240	*A1	R333	A2		
R136	C2	R241	*A1	R334	*A2		
R137	C2	R242	B2	R335	A2		
R138	*C2	R243	*A1	R336	*A2		
R139	*C2	R244	*A1	R337	A2		
R140	C1	R245	B2	R338	A2		
R141	C1	R246	*B2	R339	A2		
R142	C1	R247	*A1	R340	A2		
R143	C1	R248	*A1	R341	A2		
R144	C1	R249	*A1	R342	A2		
R145	C1	R250	*A1	R343	A2		
R146	C1	R251	*A1	R344	*A1		
R147	C1	R252	*A1	R345	*A1		
R148	C1	R253	*B2	R346	*A1		
R149	B1	R254	*B1	R347	*A1		
R150	B1	R255	*B1	R348	*B2		
R151	B1	R256	*A1	R349	*A1		
R152	*C2	R257	*B1	R350	*A1		
R153	*C2	R258	B2	R351	*A1		
R155	C1	R259	*B2	R352	*A1		
R157	B2	R260	B2	R353	*A1		
R158	B2	R261	*B2	R354	*A1		
R159	B2	R262	*B2	R355	*A1		
R160	C2	R263	*B2	R356	*B1		
R161	C2	R264	*B2	R357	*A1		
R162	C2	R265	*B2	R358	*C1		
R163	C2	R266	B2	R359	*C1		
R164	C2	R267	B2	R360	*A1		
R165	C2	R268	*A2	R361	*A1		
R166	C2	R269	B2	R362	*A1		
R167	C2	R270	B2	R363	*A1		
R168	C2	R271	B2	R364	B1		
R169	C2	R272	B2	R365	B2		
R170	C2	R273	B2	R366	B2		
R171	C2	R274	B2	R367	B2		
R172	C2	R275	A2	R368	B2		

TG-243 (1-865-972-21)

C1	C1	C93	*A2	C185	B2	L3	C1
C2	C1	C94	A1	C186	B2	L4	B1
C3	*C1	C95	*B1	C187	B2	L5	C1
C4	*C1	C96	*B2	C188	B2	L6	C2
C5	*C1	C97	*A1	C189	*A2	L7	C1
C6	*C1	C98	*A1	C190	*A2	L8	C1
C7	*C1	C99	*A1	C191	A2	L9	*B1
C8	*C1	C100	*B1	C192	*A2	L10	*C2
C9	*C1	C101	*B1	C193	A2	L11	*C2
C10	*C1	C102	*B1	C194	*A2	L12	*C1
C11	*C1	C103	*B1	C195	A2	L13	*C1
C12	*C1	C104	*B1	C196	A2	L14	A1
C13	C1	C105	*A1	C197	*B1	L15	*B1
C14	*C1	C106	*A1	C198	*B2	L16	B1
C15	C1	C107	*A1	C199	*B1	L17	*B1
C16	*C1	C108	*B1	C200	*B1		
C17	C1	C109	*A2	C201	*B1	Q1	C1
C18	*C1	C110	*A1	C202	*A2	Q2	*C1
C19	*C1	C111	*A1	C203	A1	Q3	C1
C20	C1	C112	*A1	C204	A1	Q4	*C1
C21	*C1	C113	*A1	C205	*C1	Q5	*C1
C22	*C1	C114	*A1	C206	*A2	Q6	*C1
C23	*C1	C115	*B1	C207	*A2	Q7	*B1
C24	*C1	C116	*A1	C208	*B2	Q8	*B1
C25	B1	C117	*A2	C209	*A2	Q9	*B1
C26	C1	C118	B1	C210	*A2	Q10	*B1
C27	*B1	C119	*B1			Q11	*C1
C28	*B1	C120	*B1	CL1	C2	Q12	*C1
C29	*B1	C121	B2	CL2	C2		
C30	*C1	C122	*B1	CL3	C2	R1	*C1
C31	*B1	C123	A1	CL6	C1	R2	*C1
C32	*C2	C124	*B2	CL8	C1	R3	*C1
C33	*C2	C125	*B1	CL9	B2	R4	*C1
C34	*B1	C126	*B1	CL10	B2	R5	*C1
C35	B1	C127	*B1	CL11	A2	R6	*C1
C36	*B2	C128	*B2	CL12	A2	R7	*C1
C37	*C2	C129	*A1			R8	*C1
C38	*C1	C130	*A1	CN1	C1	R9	*C1
C39	B1	C131	*A1	CN2	B1	R10	*C1
C40	*B1	C132	*A1	CN3	*C2	R11	*C1
C41	C2	C133	*B1			R12	*C1
C42	C1	C134	*A1	D1	B2	R13	*C1
C43	B1	C135	*A1			R14	*B1
C44	*B1	C136	*A1	E1	B2	R15	C1
C45	C1	C137	*A1			R16	*C1
C46	*B2	C138	*B1	IC1	*C1	R17	*C1
C47	*B2	C139	*B1	IC2	*C1	R18	C1
C48	*B2	C140	*B1	IC3	*C1	R19	C1
C49	*C1	C141	*A2	IC4	*B1	R20	*C1
C50	*B2	C142	*A2	IC5	*B2	R21	*C1
C51	*B1	C143	*A2	IC6	B2	R22	*C1
C52	*B2	C144	*A1	IC7	*B2	R23	*C1
C53	*B2	C145	*A1	IC8	*C2	R24	C1
C54	*C1	C146	B2	IC9	C2	R25	*C1
C55	*B1	C147	*B2	IC10	*C1	R26	*C1
C56	*B1	C148	*B2	IC11	*C1	R27	*C1
C57	C1	C149	B2	IC12	C1	R28	*C1
C58	*C1	C150	B2	IC13	C2	R29	*C1
C59	B2	C151	B2	IC14	*C1	R30	*B1
C60	*C2	C152	B2	IC15	*B1	R31	*B1
C61	*C2	C153	A2	IC16	*C1	R32	*C1
C62	*C2	C154	A2	IC17	A1	R33	*C1
C63	*C1	C155	*B2	IC18	*A1	R34	*B1
C64	*C2	C156	*B2	IC19	*A2	R35	*C1
C65	*C2	C157	*A2	IC20	A2	R36	*B1
C66	*C2	C158	A2	IC21	*A2	R37	*B1
C67	*C2	C159	B2	IC22	B2	R38	*C1
C68	*C2	C160	*B2	IC23	B2	R39	*C2
C69	*C2	C161	B2	IC24	B2	R40	*C2
C70	*C2	C162	*B2	IC25	B2	R41	*B1
C71	*C1	C163	B2	IC26	B2	R42	*B1
C72	*C1	C164	B2	IC27	A2	R43	*B1
C73	*C1	C165	*A2	IC28	A2	R44	*B1
C74	*C2	C166	*A2	IC29	A2	R45	*B1
C75	*C1	C167	A2	IC30	A2	R46	*B1
C76	*C2	C168	*A2	IC31	A2	R47	*B2
C77	*C2	C169	*A2	IC32	A2	R48	*B2
C78	*C2	C170	B2	IC33	A2	R49	*B2
C79	*C2	C171	B2	IC34	A2	R50	*B2
C80	*C2	C172	B2	IC35	A2	R51	*B2
C81	*C2	C173	B2	IC36	A2	R52	*B2
C82	*C2	C174	*A2	IC37	A1	R53	B2
C83	*C2	C175	*A2	IC38	A1	R54	B2
C84	*C2	C176	A2	IC39	A1	R55	*B2
C85	A1	C177	*A2	IC40	B1	R56	*B2
C86	A1	C178	A2	IC41	*A1	R57	*B2
C87	*A1	C179	*A2	IC42	*B1	R58	*B2
C88	*A1	C180	A2	IC43	*B2	R59	*B2
C89	A1	C181	A2	IC44	*A2	R60	B1
C90	*A2	C182	A2			R61	B1
C91	*A2	C183	*A2	L1	B1	R62	*C1
C92	*A1	C184	*A2	L2	C1	R63	*C1

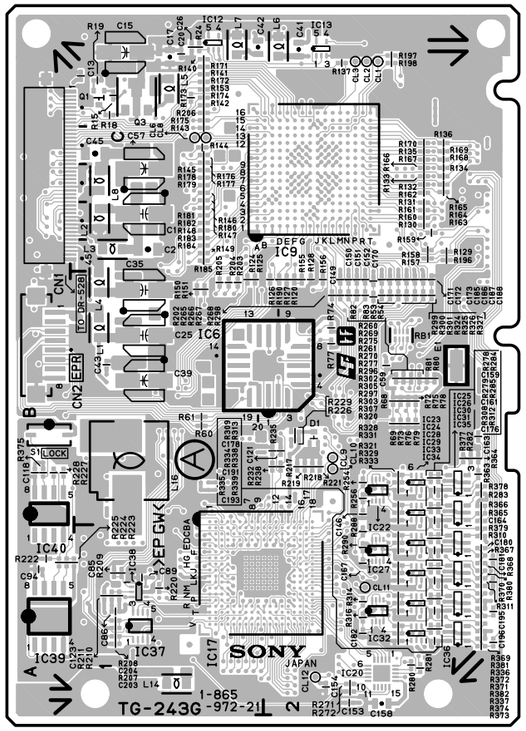

TG-243 -A SIDE-
SUFFIX: -21

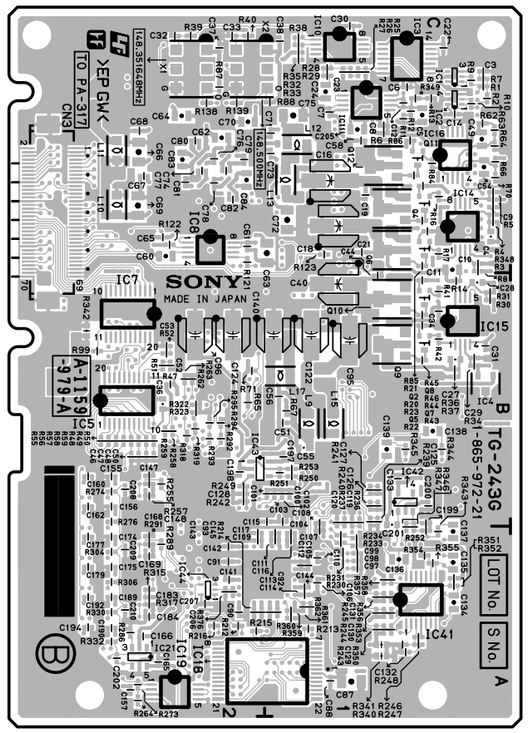


TG-243 -B SIDE-
SUFFIX: -21


R64	*C1	R197	C2	R293	*B2	S1	B1
R65	*B2	R198	C2	R294	*B2		
R66	*C1	R202	B2	R295	*B2	X1	*C2
R67	*B1	R203	B1	R296	A2	X2	*C2
R68	B2	R204	B1	R297	A2		
R69	B2	R205	B1	R298	B2	*:B SIDE	
R70	*C1	R206	C1	R299	B2		
R71	*B2	R207	A1	R300	B2		
R72	B2	R208	A1	R301	B2		
R73	B2	R209	A1	R302	A2		
R74	B2	R210	A1	R303	A2		
R75	B2	R211	A1	R304	*A2		
R76	B2	R212	*A2	R305	A2		
R77	B2	R213	*A1	R306	*A2		
R78	B2	R214	*A1	R307	A2		
R79	B2	R215	*A2	R308	A2		
R80	B2	R216	*A2	R309	A2		
R81	B2	R217	B2	R310	A2		
R82	B2	R218	B2	R311	A2		
R83	B2	R219	B2	R312	A2		
R84	*C1	R220	A1	R313	A2		
R85	*C1	R221	B2	R314	A2		
R86	*C1	R222	A1	R315	*A2		
R87	*C2	R223	A1	R316	A2		
R88	*C1	R224	A1	R317	*A2		
R99	*B2	R225	A1	R318	*B2		
R120	B2	R226	B2	R319	*B2		
R121	*C2	R227	B1	R320	A2		
R122	*C2	R228	B1	R321	A2		
R123	*C1	R229	B2	R322	*B2		
R124	B1	R230	*A1	R323	*B2		
R125	B1	R231	*A1	R324	B2		
R126	B2	R232	B2	R325	B2		
R127	B2	R233	*A1	R326	B2		
R128	B2	R234	*A1	R327	B2		
R129	C2	R235	B2	R328	A2		
R130	C2	R236	*B1	R329	A2		
R131	C2	R237	*B1	R330	*A2		
R132	C2	R238	B2	R331	A2		
R133	C2	R239	*B1	R332	*A2		
R134	C2	R240	*B1	R333	A2		
R135	C2	R241	*B1	R334	A2		
R136	C2	R242	*B2	R335	A2		
R137	C2	R243	*A1	R336	A2		
R138	*C2	R244	*A1	R337	A2		
R139	*C2	R245	*A1	R338	A2		
R140	C1	R246	*A1	R339	A2		
R141	C1	R247	*A1	R340	*A1		
R142	C1	R248	*A1	R341	*A1		
R143	C1	R249	*B2	R342	*B2		
R144	C1	R250	*B1	R343	*A1		
R145	C1	R251	*B1	R344	*B1		
R146	C1	R252	*A1	R345	*B1		
R147	C1	R253	*B1	R346	*A1		
R148	C1	R254	B2	R347	*A1		
R149	C1	R255	*B2	R348	*C1		
R150	B1	R256	B2	R349	*C1		
R151	B1	R257	*B2	R350	*A1		
R153	C1	R258	*B2	R351	*A1		
R155	B2	R259	*B2	R352	*A1		
R156	B2	R260	B2	R353	*A1		
R157	C2	R261	B2	R354	*A1		
R158	C2	R262	*B2	R355	*A1		
R159	C2	R263	*B2	R356	*A1		
R160	C2	R264	*A2	R357	*A1		
R161	C2	R265	B2	R358	*A1		
R162	C2	R266	B2	R359	*A1		
R163	C2	R267	B2	R360	*A1		
R164	C2	R268	B2	R361	*A1		
R165	C2	R269	B2	R362	*A1		
R166	C2	R270	B2	R363	B2		
R167	C2	R271	A2	R364	B2		
R168	C2	R272	A2	R365	B2		
R169	C2	R273	*A2	R366	B2		
R170	C2	R274	*B2	R367	A2		
R171	C1	R275	B2	R368	A2		
R172	C1	R276	*B2	R369	A2		
R173	C1	R277	B2	R370	A2		
R174	C1	R278	B2	R371	A2		
R175	C1	R279	B2	R372	A2		
R176	C1	R280	A2	R373	A2		
R177	C1	R281	A2	R374	A2		
R178	C1	R282	B2	R375	B1		
R179	C1	R283	B2	R376	*A2		
R180	C1	R284	B2	R377	B2		
R181	C1	R285	B2	R378	B2		
R182	C1	R286	*A2	R379	A2		
R183	C1	R288	A2	R380	A2		
R184	C1	R289	*A2	R381	A2		
R185	C1	R290	A2	R382	A2		
R190	B2	R291	*A2				
R196	C2	R292	*B2	RB1	B2		

TG-247 (1-865-960-21)

C1	C1	C93	*A2	C185	*A2	IC34	A2
C2	C1	C94	A1	C186	A2	IC35	A2
C3	*C1	C95	*B1	C187	*A2	IC36	A2
C4	*C1	C96	*B2	C188	A2	IC37	A1
C5	*C1	C97	*A1	C189	A2	IC38	A1
C6	*C1	C98	*A1	C190	*B1	IC39	A1
C7	*C1	C99	*A1	C191	*B2	IC40	B1
C8	*C1	C100	*B1	C192	*B1	IC41	*A1
C9	*C1	C101	*B1	C193	*B1	IC42	*A1
C10	*B1	C102	*B1	C194	*A1	IC43	*B2
C11	*B1	C103	*B1	C195	*A1	IC44	*B1
C12	*C1	C104	*A1	C196	*A1	IC45	*B1
C13	C1	C105	*A1	C197	*B1	IC46	*B1
C14	*C1	C106	*A1	C198	*A1	IC47	*A2
C15	C1	C107	*A1	C199	A1		
C16	*C1	C108	*A1	C200	A1	L1	B1
C17	C1	C109	*A2	C201	*A2	L2	C1
C18	*C1	C110	*A1	C202	B1	L3	C1
C19	*C1	C111	*A1	C203	*B1	L4	B1
C20	C1	C112	*A1	C204	B1	L5	C1
C21	*C1	C113	*A1	C205	*B1	L6	C2
C22	*C1	C114	*A1	C206	*B1	L7	C1
C23	*C1	C115	*A1	C207	*B1	L8	C1
C24	*C1	C116	*A1	C208	*B1	L9	*B1
C25	B1	C117	*A2	C209	*B1	L10	*C2
C26	C1	C118	B1	C210	*B1	L11	*C2
C27	*B1	C119	*A1	C211	*B1	L12	*C1
C28	*B1	C120	*A1	C212	*B1	L13	*C1
C29	*B1	C121	B2	C213	*A1	L14	A1
C30	*C1	C122	*B1	C214	*B1	L15	*B1
C31	*B1	C123	A1	C215	*B1	L16	B1
C32	*C2	C124	*B2	C216	*C1	L17	*B1
C33	*C2	C125	*B2	C217	*B2		
C34	*B1	C126	*A1	C218	*A2	Q1	C1
C35	B1	C127	*A1	C219	*A2	Q2	*C1
C36	*B2	C128	*A1	C220	*A2	Q3	C1
C37	*C2	C129	*A1	C221	*A2	Q4	*C1
C38	*C1	C130	*A1			Q5	*C1
C39	B1	C131	*A1	CL1	C2	Q6	*C1
C40	*B1	C132	*A1	CL2	C2	Q7	*B1
C41	C2	C133	*B1	CL3	C2	Q8	*B1
C42	C1	C134	*A2	CL4	C2	Q9	*B1
C43	B1	C135	*A2	CL5	C2	Q10	*B1
C44	*B1	C136	*A2	CL6	C2	Q11	*C1
C45	C1	C137	*A1	CL7	C2	Q12	*C1
C46	*B2	C138	*A1	CL8	C2		
C47	*B2	C139	B2	CL9	B2	R1	*C1
C48	*B2	C140	*B2	CL10	B2	R2	*C1
C49	*C1	C141	*B2	CL11	A2	R3	*C1
C50	*B2	C142	B2	CL12	A2	R4	*C1
C51	*B1	C143	B2			R5	*C1
C52	*B2	C144	B2	CN1	C1	R6	*C1
C53	*B2	C145	B2	CN2	B1	R7	*C1
C54	*C1	C146	A2	CN3	*C2	R8	*B1
C55	*B1	C147	A2			R9	*C1
C56	*B1	C148	*B2	D1	B2	R10	*C1
C57	C1	C149	*B2			R11	*C1
C58	*C1	C150	*A2	E1	B2	R12	*C1
C59	B2	C151	A2			R13	*C1
C60	*B2	C152	B2	IC1	*C1	R14	*B1
C61	*C2	C153	*B2	IC2	*C1	R15	C1
C62	*C2	C154	A2	IC3	*C1	R16	*C1
C63	*C1	C155	*B2	IC4	*B1	R17	*C1
C64	*C2	C156	B2	IC5	*B2	R18	C1
C65	*C2	C157	A2	IC6	B2	R19	C1
C66	*C2	C158	*A2	IC7	*B2	R20	*C1
C67	*C2	C159	*A2	IC8	*C2	R21	*C1
C68	*C2	C160	A2	IC9	C2	R22	*B1
C69	*C2	C161	*A2	IC10	*C1	R23	*C1
C70	*C2	C162	*A2	IC11	*C1	R24	C1
C71	*C1	C163	B2	IC12	C1	R25	*C1
C72	*C1	C164	B2	IC13	C2	R26	*C1
C73	*C1	C165	B2	IC14	*C1	R27	*C1
C74	*C2	C166	B2	IC15	*B1	R28	*C1
C75	*C1	C167	*A2	IC16	*C1	R29	*C1
C76	*C2	C168	*A2	IC17	A1	R30	*B1
C77	*C2	C169	A2	IC18	*A1	R31	*B1
C78	*C2	C170	*A2	IC19	*A2	R32	*C1
C79	*C2	C171	A2	IC20	A2	R33	*C1
C80	*C2	C172	*A2	IC21	*A2	R34	*B1
C81	*C2	C173	A2	IC22	B2	R35	*C1
C82	*C2	C174	A2	IC23	B2	R36	*B1
C83	*C2	C175	A2	IC24	B2	R37	*B1
C84	*C2	C176	*A2	IC25	B2	R38	*C1
C85	A1	C177	*A2	IC26	B2	R39	*C2
C86	A1	C178	B2	IC27	A2	R40	*C2
C87	*A1	C179	B2	IC28	A2	R41	*B1
C88	*A1	C180	B2	IC29	A2	R42	*B1
C89	A1	C181	B2	IC30	A2	R43	*B1
C90	*A2	C182	*A2	IC31	A2	R44	*B1
C91	*A2	C183	*A2	IC32	A2	R45	*B1
C92	*A1	C184	A2	IC33	A2	R46	*B1

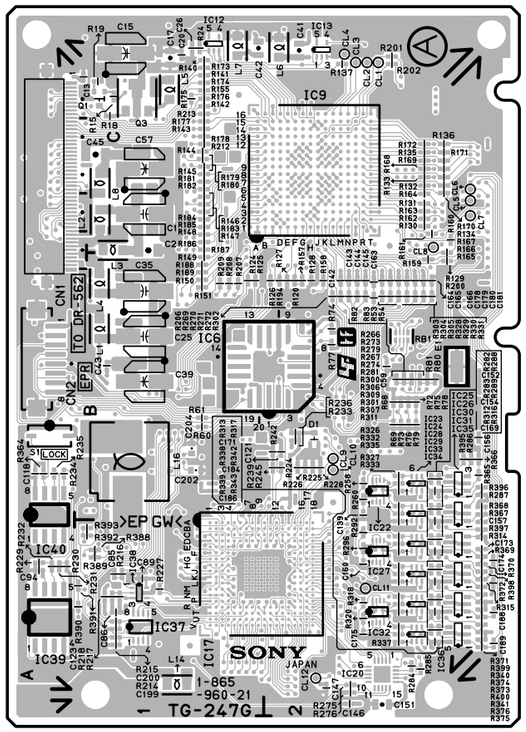

TG-247 -A SIDE-
SUFFIX: -21

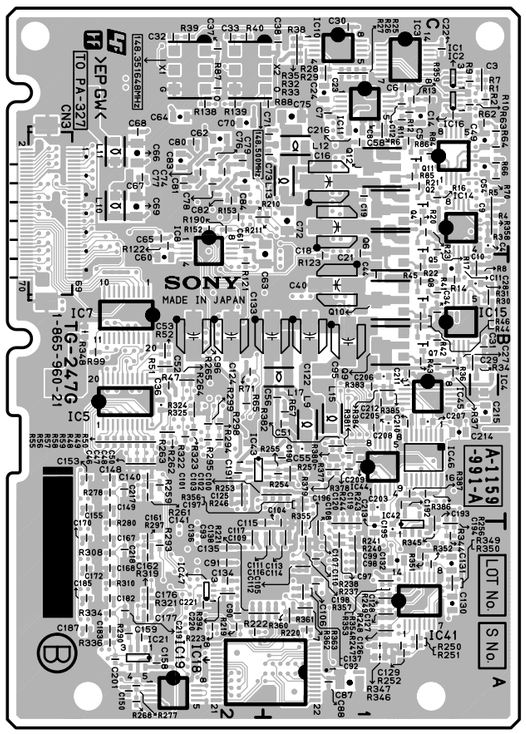


TG-247 -B SIDE-
SUFFIX: -21


R47	*B2	R171	C2	R274	B2	R367	B2
R48	*B2	R172	C2	R275	A2	R368	B2
R49	*B2	R173	C1	R276	A2	R369	A2
R50	*B2	R174	C1	R277	*A2	R370	A2
R51	*B2	R175	C1	R278	*B2	R371	A2
R52	*B2	R176	C1	R279	B2	R372	A2
R53	B2	R177	C1	R280	*A2	R373	A2
R54	B2	R178	C1	R281	A2	R374	A2
R55	*B2	R179	C1	R282	B2	R375	A2
R56	*B2	R180	C1	R283	B2	R376	A2
R57	*B2	R181	C1	R284	A2	R377	*B1
R58	*B2	R182	C1	R285	A2	R378	*B1
R59	*B2	R183	C1	R286	B2	R379	*B1
R60	B1	R184	C1	R287	B2	R380	*B1
R61	B1	R185	C1	R288	B2	R381	*B1
R62	*C1	R186	C1	R289	B2	R382	*B1
R63	*C1	R187	C1	R290	*A2	R383	*B1
R64	*C1	R188	B1	R292	A2	R384	*B1
R65	*B2	R189	B1	R293	*A2	R385	*B1
R66	*C1	R190	*C2	R294	*B2	R386	*B1
R67	*B1	R194	B2	R295	*B2	R387	*B1
R68	B2	R200	B2	R296	A2	R388	A1
R69	B2	R201	C2	R297	*A2	R389	A1
R70	*C1	R202	C2	R298	*B2	R390	A1
R71	*B2	R206	B2	R299	*B2	R391	A1
R72	B2	R207	B1	R300	A2	R392	A1
R73	B2	R208	B1	R301	A2	R393	A1
R74	B2	R209	B1	R302	B2	R394	*A2
R75	B2	R210	*C2	R303	B2	R395	B2
R76	B2	R211	*C1	R304	B2	R396	B2
R77	B2	R212	C1	R305	B2	R397	A2
R78	B2	R213	C1	R306	A2	R398	A2
R79	B2	R214	A1	R307	A2	R399	A2
R80	B2	R215	A1	R308	*A2	R400	A2
R81	B2	R216	A1	R309	A2		
R82	B2	R217	A1	R310	*A2	RB1	B2
R83	B2	R218	A1	R311	A2		
R84	*C1	R219	*A2	R312	A2	S1	B1
R85	*C1	R220	*A1	R313	A2		
R86	*C1	R221	*A1	R314	A2	X1	*C2
R87	*C2	R222	*A2	R315	A2	X2	*C2
R88	*C1	R223	*A2	R316	A2		
R99	*B2	R224	B2	R317	A2	*:B SIDE	
R120	B2	R225	B2	R318	A2		
R121	*B2	R226	B2	R319	*A2		
R122	*C2	R227	A1	R320	A2		
R123	*B1	R228	B2	R321	*A2		
R124	B1	R229	A1	R322	*B2		
R125	B1	R230	A1	R323	*B2		
R126	B2	R231	A1	R324	*B2		
R127	B2	R232	A1	R325	*B2		
R128	B2	R233	B2	R326	A2		
R129	B2	R234	B1	R327	A2		
R130	C2	R235	B1	R328	B2		
R131	C2	R236	B2	R329	B2		
R132	C2	R237	*A1	R330	B2		
R133	C2	R238	*A1	R331	B2		
R134	C2	R239	B2	R332	A2		
R135	C2	R240	*A1	R333	A2		
R136	C2	R241	*A1	R334	*A2		
R137	C2	R242	B2	R335	A2		
R138	*C2	R243	*A1	R336	*A2		
R139	*C2	R244	*A1	R337	A2		
R140	C1	R245	B2	R338	A2		
R141	C1	R246	*B2	R339	A2		
R142	C1	R247	*A1	R340	A2		
R143	C1	R248	*A1	R341	A2		
R144	C1	R249	*A1	R342	A2		
R145	C1	R250	*A1	R343	A2		
R146	C1	R251	*A1	R344	*A1		
R147	C1	R252	*A1	R345	*A1		
R148	C1	R253	*B2	R346	*A1		
R149	B1	R254	*B1	R347	*A1		
R150	B1	R255	*B1	R348	*B2		
R151	B1	R256	*A1	R349	*A1		
R152	*C2	R257	*B1	R350	*A1		
R153	*C2	R258	B2	R351	*A1		
R155	C1	R259	*B2	R352	*A1		
R157	B2	R260	B2	R353	*A1		
R158	B2	R261	*B2	R354	*A1		
R159	B2	R262	*B2	R355	*A1		
R160	C2	R263	*B2	R356	*B1		
R161	C2	R264	*B2	R357	*A1		
R162	C2	R265	*B2	R358	*C1		
R163	C2	R266	B2	R359	*C1		
R164	C2	R267	B2	R360	*A1		
R165	C2	R268	*A2	R361	*A1		
R166	C2	R269	B2	R362	*A1		
R167	C2	R270	B2	R363	*A1		
R168	C2	R271	B2	R364	B1		
R169	C2	R272	B2	R365	B2		
R170	C2	R273	B2	R366	B2		

TR-136 (1-868-410-13)

C1	*C3	C163	*C2	C283	C1	C507	*A2	C707	B2	CL31	*A3	IC201	*C3
C2	A3	C164	*C2	C284	C1	C508	*B2	C708	B2	CL41	D3	IC202	D2
C3	A3	C165	*C2	C285	D1	C509	*A2	C709	B2	CL42	D3	IC203	*D2
C4	*A3	C166	*C2	C286	C1	C510	*A2	C710	B2	CL101	D3	IC204	D2
C5	*A3	C167	*C3	C287	D1	C511	*A2	C721	*B2	CL102	C1	IC205	*D2
C6	*A3	C171	*C2	C288	D1	C512	*A2	C722	*B2	CL103	C2	IC206	D2
C7	*A3	C172	C2	C289	C1	C513	*A2	C723	*B2	CL104	C3	IC207	*D2
C8	*A3	C173	*C2	C290	*C1	C514	*A2	C724	*B2	CL105	C2	IC208	D1
C9	A3	C174	*C2	C291	*D1	C515	*B2	C725	*B2	CL201	D2	IC209	*D1
C10	A3	C175	*C2	C292	*D1	C516	*B2	C726	*B2	CL401	B3	IC210	D1
C11	B3	C176	*C2	C293	*D1	C517	*A2	C727	*B2	CL501	A2	IC211	*D1
C12	*A3	C177	*C2	C294	*D1	C518	*B2	C728	*B3	CL502	A2	IC401	B3
C13	A3	C178	*C2	C295	*D1	C519	*A2	C729	*B2	CL503	A2	IC402	C3
C14	A3	C179	*C2	C296	*D1	C520	*A2	C730	*B2	CL701	B2	IC404	C2
C21	*A3	C180	*C2	C297	*D1	C521	*A2	C731	*B2	CL702	B2	IC405	C2
C22	*A3	C181	*C2	C298	*D1	C522	*A2	C732	*B2	CL703	B2	IC406	*C3
C31	A3	C182	*C2	C299	*D1	C523	*A2	C733	*B3	CL704	B2	IC407	*C2
C32	*A3	C186	*C2	C300	*D1	C524	*A2	C734	*B3	CL851	A2	IC408	*C2
C33	A3	C187	*C2	C301	*D1	C525	*A2	C735	B3			IC410	C2
C34	A3	C188	*C2	C306	D1	C526	*A1	C736	B3	CN1	*C3	IC501	A2
C41	D3	C189	*C2	C307	C1	C527	*A1	C737	B3	CN2	C3	IC504	A1
C42	D3	C190	*C2	C308	C1	C528	*A2	C738	B2	CN3	A1	IC531	*A3
C43	*D3	C191	*C3	C309	C1	C529	*A2	C739	B3	CN101	C2	IC532	A3
C44	*D3	C192	*C3	C310	D1	C531	*B2	C761	*B1	CN601	B1	IC533	A3
C45	*D3	C193	*C3	C311	C1	C532	A2	C762	*B1	CN602	B1	IC541	*A2
C46	D3	C194	C2	C312	D1	C533	A3	C763	*B1			IC542	*A1
C47	*D3	C201	D2	C313	D1	C541	*A2	C764	*B1	D1	*A3	IC543	A2
C48	*D3	C202	C2	C314	C1	C542	*A2	C765	*B1	D2	*A3	IC545	*A2
C49	D3	C203	D3	C315	*C1	C543	A1	C766	*A1	D41	*D3	IC546	A2
C50	D3	C204	D3	C316	*D1	C544	*A1	C767	*A1	D42	*D3	IC601	*C3
C51	D3	C205	*C2	C317	*D1	C546	*A2	C768	B1	D43	*D3	IC602	*B3
C52	D3	C208	*C2	C318	*D1	C547	*A2	C769	*A1	D101	*D2	IC603	B3
C53	D3	C209	*C2	C319	*D1	C548	*A2	C770	*B2	D102	*D3	IC604	*B3
C92	*C3	C210	D2	C320	*D1	C549	*A2	C771	*B2	D103	*D3	IC605	*A1
C93	*C3	C211	C2	C321	*D1	C550	*A2	C772	*B2	D104	*C1	IC606	*B1
C94	*D3	C212	D2	C322	*D1	C552	*A1	C801	*B1	D105	*C1	IC607	*B1
C95	A2	C213	D2	C323	*D1	C553	*A1	C802	*B1	D106	*C1	IC608	*B1
C101	D3	C214	C2	C324	*D1	C554	*A2	C803	*B1	D107	*C1	IC701	B2
C102	D3	C215	*C2	C325	*D1	C555	*A2	C804	*B1	D108	*C3	IC702	B3
C103	D3	C216	*D2	C326	*D1	C556	A2	C805	*B1	D109	*C3	IC703	B2
C104	D2	C217	*D2	C401	C3	C557	A2	C806	*B1	D110	*C2	IC721	*B2
C105	D3	C218	*D2	C402	C3	C558	A2	C807	*B1	D111	*C2	IC722	*B2
C106	D3	C219	*D2	C403	C3	C559	*A3	C808	*B1	D112	*C2	IC725	*B3
C107	*D3	C220	*D2	C404	C3	C560	*A2	C809	*B1	D113	*C2	IC727	B3
C108	*D3	C221	*D2	C405	B3	C561	*A2	C810	*B1	D201	*D2	IC728	B3
C109	*D3	C222	*D2	C407	C3	C562	*A2	C811	*B1	D202	*C1	IC729	B3
C110	*D3	C223	*D2	C408	C3	C563	A2	C812	*B1	D205	*C2	IC761	*B1
C111	*D3	C224	*D2	C409	C3	C564	A2	C813	*B1	D208	*C1	IC763	*A1
C112	*D3	C225	*D2	C410	B3	C565	*A2	C814	*B1	D211	*C1	IC801	*B1
C113	*D3	C226	D2	C411	B3	C566	A2	C815	B2	D214	*D2	IC802	*B1
C114	*D3	C231	D1	C412	B2	C601	*C3	C816	B2	D401	C2	IC803	*B1
C115	*D3	C232	C2	C413	B3	C602	*B2	C817	B2	D402	C2	IC805	*B1
C116	*D3	C233	C2	C414	C3	C603	A2	C818	B2	D403	C3	IC806	B2
C117	D3	C234	D2	C415	C2	C604	*B2	C819	B2	D404	C3	IC807	*B2
C118	D3	C235	C2	C416	C3	C605	*A1	C820	B2	D405	*B1	IC851	*A3
C119	D3	C236	D2	C417	C2	C606	*B1	C821	B2	D406	*C1	IC852	*A3
C120	*D3	C237	D1	C418	C2	C607	*A1	C822	B2	D541	A2	IC853	A3
C121	*D3	C238	*C1	C419	C2	C608	*B1	C823	B2	D542	A2	IC854	A3
C122	*D3	C239	*D1	C420	C2	C609	*A1	C824	B2	D721	*B2		
C126	*C1	C240	*D2	C422	C2	C610	*B1	C825	B2	D722	*B2	JC1	*C3
C127	C1	C241	*D2	C423	C2	C611	*A1	C826	B2	D761	*B1	JC2	*C3
C128	*C1	C242	*D1	C425	C1	C612	*B1	C827	*B2			JC101	C3
C129	*C1	C243	*D1	C431	*C3	C613	*A1	C828	*B2	E1	B3	JC102	C3
C130	*C1	C244	*D1	C432	*C3	C614	A1	C829	*B2	E2	C1	JC103	C1
C131	*C1	C245	*D1	C433	*C3	C615	*A1	C830	*B2	E4	D3	JC104	C1
C132	*C1	C246	*D2	C434	*B3	C616	A1	C831	*B2	E11	*A1		
C133	*C1	C247	*D2	C435	*B3	C617	*A1	C832	*B2	E12	*B1	L1	A3
C134	*C1	C248	D1	C436	*C3	C618	A1	C833	*B2	E13	*C1	L2	A3
C135	*C1	C249	*D2	C437	*C2	C619	*B1	C834	*B2	E200	C2	L11	B3
C136	*C1	C256	D2	C438	*B3	C620	B1	C851	*A3			L21	*A3
C137	*C1	C257	C2	C439	*C2	C621	A1	C852	*A3	FL201	C3	L31	A3
C138	*C1	C258	C2	C440	*C2	C622	A1	C853	A3	FL202	D3	L41	D3
C141	*C1	C259	C2	C441	*B3	C623	*B1	C854	A3	FL601	A1	L101	D2
C142	C1	C260	D2	C442	*B2	C624	*B1			FL602	B1	L102	*C1
C143	*C1	C261	C2	C443	*B2	C625	B1	CF101	D3			L103	*C1
C144	*C1	C262	D2	C444	*C2	C626	B1	CF102	C1	IC1	*A3	L104	*C3
C145	*C1	C263	D2	C445	*C2	C627	B1	CF103	C1	IC11	*B3	L105	*C2
C146	*C1	C264	C2	C451	*B1	C628	B1	CF104	C3	IC21	*A3	L106	*C2
C147	*C1	C265	*C2	C452	*B1	C629	B1	CF105	C2	IC31	*A3	L201	*C2
C148	*C1	C266	*D2	C453	*C2	C630	B1	CF201	C2	IC41	*D3	L202	D2
C149	*C1	C267	*D2	C454	*B2	C631	*C1	CF202	C2	IC42	*D3	L203	C2
C150	*C1	C268	*D2	C455	*C2	C632	*B1	CF203	C2	IC61	*D2	L204	D1
C151	*C1	C269	*D2	C456	*B2	C633	*B1	CF204	C2	IC63	*D2	L205	D2
C152	*C1	C270	*D2	C457	*B2	C634	*B1	CF205	C1	IC92	*C3	L206	D2
C153	*C1	C271	*D2	C458	*C2	C635	*B1	CF206	C1	IC93	*C3	L207	C2
C156	*C3	C272	*D2	C459	*C1	C636	*B1	CF207	C1	IC94	A2	L208	D2
C157	C3	C273	*D2	C501	*A2	C701	B2	CF208	C1	IC101	D2	L209	D1
C158	*C3	C274	*D2	C502	*A2	C702	B3			IC102	*D3	L210	C1
C159	*C3	C275	*D2	C503	*B2	C703	B2	CL1	*A3	IC103	*D3	L211	D1
C160	*C2	C276	*D2	C504	*B2	C704	B2	CL2	*A3	IC104	*D3	L212	D1
C161	*C2	C281	D1	C505	*B2	C705	B2	CL11	*A3	IC105	*C2	L213	C1
C162	*C2	C282	C1	C506	*B2	C706	B2	CL21	*A3	IC106	*D2	L214	D1
												L215	D2

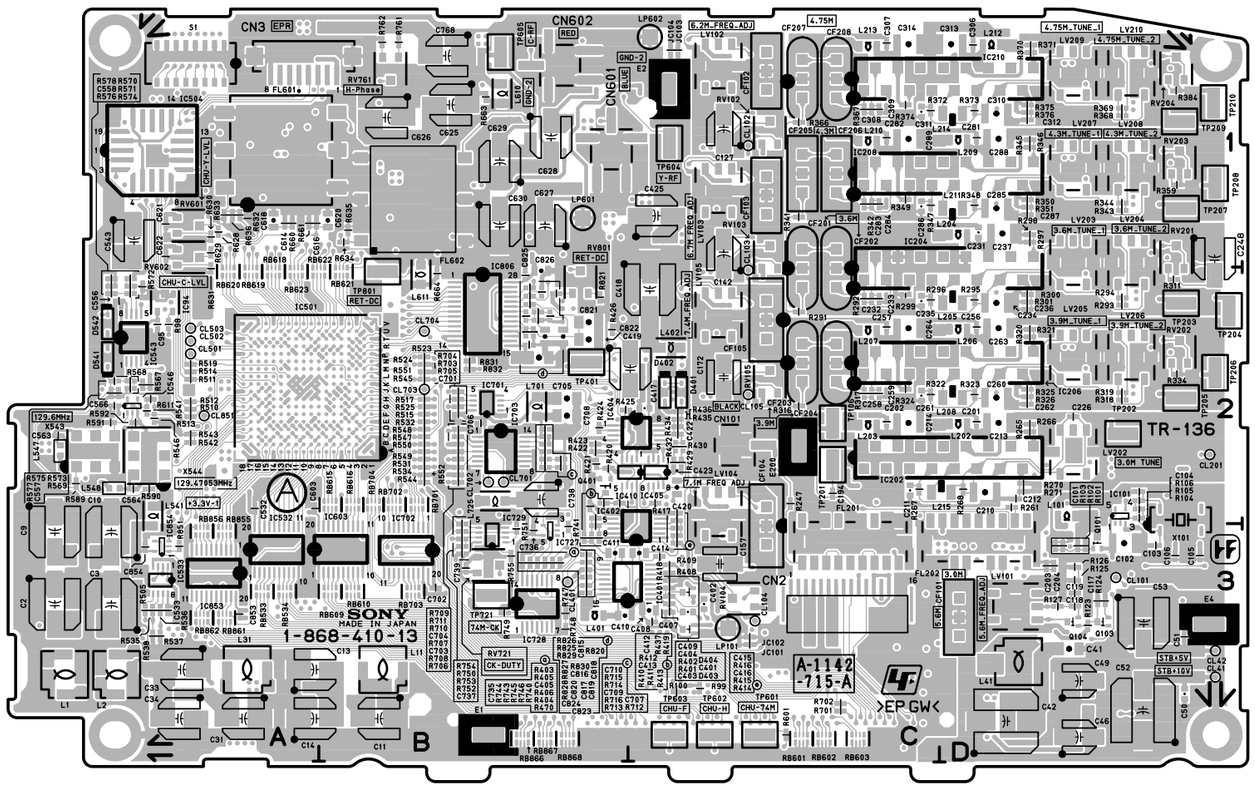

TR-136 -A SIDE-
SUFFIX: -13

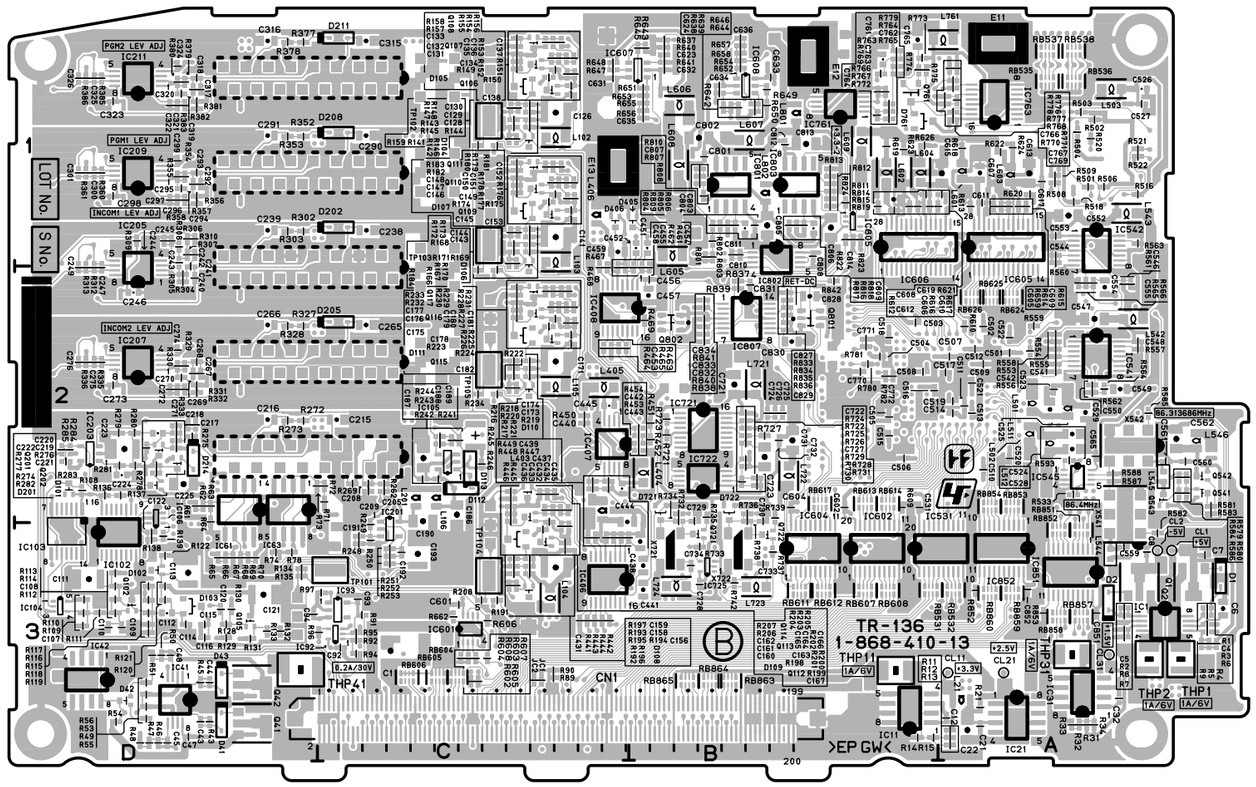


TR-136 -B SIDE-
SUFFIX: -13


R1	*A3	R137	*D2	R262	*C2	R371	D1	R523	B2	R631	A2	R768	*A1	RB624	*A2
R2	*A3	R138	*D3	R265	D2	R372	C1	R524	B2	R632	A1	R769	*B1	RB625	*A2
R3	*A3	R139	*D3	R266	D2	R373	D1	R525	B2	R633	A1	R770	*A1	RB626	*A2
R4	*A3	R141	*C1	R267	C2	R374	C1	R531	B2	R634	B1	R771	*A1	RB701	B2
R5	*A3	R142	*C1	R268	D2	R375	D1	R532	B2	R635	B1	R772	*B1	RB702	B2
R6	*A3	R143	*C1	R269	*C2	R376	D1	R533	*A2	R636	A1	R773	*B1	RB703	B3
R7	*A3	R144	*C1	R270	D2	R377	*D1	R534	B2	R637	*B1	R774	*B1	RB704	B2
R8	*A3	R145	*C1	R271	D2	R378	*D1	R535	A3	R638	*B1	R775	*B1	RB851	*A3
R9	*A3	R146	*C1	R272	*D2	R379	*D1	R536	A3	R639	*B1	R776	*A1	RB852	*A3
R11	*A3	R147	*C1	R273	*D2	R380	*D1	R537	A3	R640	*B1	R777	*A1	RB853	*A2
R12	*A3	R148	*C1	R274	*D2	R381	*D1	R538	A3	R641	*B1	R778	*A1	RB854	*A2
R13	*A3	R149	*C1	R275	*D2	R382	*D1	R541	A2	R642	*B1	R779	*B1	RB855	A3
R14	*B3	R150	*C1	R276	*D2	R383	*D1	R542	A2	R643	*B1	R780	*B2	RB856	A3
R15	*B3	R151	*C1	R277	*D2	R384	D1	R543	A2	R644	*B1	R781	*B2	RB857	*A3
R21	*A3	R152	*C1	R278	*D2	R385	*D1	R544	B2	R645	*B1	R782	*B2	RB858	*A3
R31	*A3	R153	*C1	R279	*D2	R386	*D1	R545	B2	R646	*B1	R801	*B1	RB859	*A3
R32	*A3	R154	*C1	R280	*D2	R401	C3	R546	A2	R647	*C1	R802	*B1	RB860	*A3
R33	*A3	R155	*C1	R281	*D2	R402	C3	R547	B2	R648	*C1	R803	*B1	RB861	A3
R34	*A3	R156	*C1	R282	*D2	R403	B3	R548	B2	R649	*B1	R804	*B1	RB862	A3
R43	*D3	R157	*C1	R283	*D2	R404	B3	R549	B2	R650	*B1	R805	*B1	RB863	*B3
R45	*D3	R158	*C1	R284	*D2	R405	B3	R550	B2	R651	*B1	R806	*B1	RB864	*B3
R46	*D3	R159	*C1	R285	*D2	R406	B3	R551	B2	R652	*B1	R807	*B1	RB865	*B3
R47	*D3	R166	*C2	R291	C2	R408	C3	R552	B2	R653	*B1	R808	*B1	RB866	B3
R48	*D3	R167	*C1	R292	C2	R409	C3	R553	*A2	R654	*B1	R809	*B1	RB867	B3
R49	*D3	R168	*C1	R293	D2	R410	B3	R554	*A2	R655	*B1	R810	*B1	RB868	B3
R50	*D3	R169	*C1	R294	D2	R411	B3	R555	*A2	R656	*B1	R811	*B1		
R51	*D3	R170	*C1	R295	D2	R412	B2	R556	*A2	R657	*B1	R812	*B1	RV102	C1
R53	*D3	R171	*C1	R296	C2	R413	B3	R557	*A2	R658	*B1	R813	*B1	RV103	C1
R54	*D3	R172	*C1	R297	D1	R414	C3	R558	*A2	R659	*A1	R814	*B1	RV104	C3
R55	*D3	R173	*C1	R298	D1	R415	C3	R559	*A2	R660	A1	R815	*B1	RV105	C2
R56	*D3	R174	*C1	R299	C2	R416	C2	R560	*A1	R661	A1	R816	*B1	RV201	D1
R61	*D2	R175	*C1	R300	D2	R417	C2	R561	*A2	R662	*C3	R817	*B1	RV202	D2
R62	*D2	R176	*C1	R301	D2	R418	C3	R562	*A2	R663	B1	R818	*B1	RV203	D1
R63	*D2	R177	*C1	R302	*D1	R419	B2	R563	*A1	R664	B2	R819	*B1	RV204	D1
R64	*D2	R178	*C1	R303	*D1	R420	B2	R564	*A2	R701	C3	R820	B2	RV601	A1
R65	*D3	R179	*C1	R304	*D2	R421	B2	R565	*A2	R702	C3	R821	B2	RV602	A1
R66	*D3	R180	*C1	R305	*D2	R422	B2	R566	*A2	R703	B2	R822	*B1	RV721	B3
R67	*D3	R181	*C1	R306	*D1	R423	B2	R567	A2	R704	B2	R823	*B1	RV761	B1
R68	*D3	R182	*C1	R307	*D1	R424	B2	R568	A2	R705	B2	R824	*B1	RV801	B2
R69	*D3	R183	*C1	R308	*D1	R425	B2	R569	A2	R706	B2	R825	B2		
R70	*D3	R184	*C2	R309	*D1	R426	B2	R570	A2	R707	B2	R826	B2	S1	A1
R71	*C2	R191	*C3	R310	*D1	R429	C2	R571	A2	R708	B2	R827	B2		
R72	*C2	R192	*C3	R311	D2	R430	C2	R572	A2	R709	B2	R828	B2	THP1	*A3
R73	*D2	R193	*C3	R312	*D2	R432	C2	R573	A2	R710	B2	R829	B2	THP2	*A3
R74	*D3	R194	*C3	R313	*D2	R434	C2	R574	A2	R711	B2	R830	B2	THP11	*B3
R78	*D3	R195	*C3	R316	C2	R435	C2	R575	A2	R712	B2	R831	B2	THP31	*A3
R89	*C3	R196	*C3	R317	C2	R436	C2	R576	A2	R713	B2	R832	B2	THP41	*D3
R90	*C3	R197	*C3	R318	D2	R437	B2	R577	A2	R714	B2	R833	*B2		
R91	*C3	R198	*C3	R319	D2	R441	*C3	R578	A2	R715	B2	R834	*B2	TP101	*C3
R92	*C3	R199	*C3	R320	D2	R442	*C3	R579	*A2	R716	B2	R835	*B2	TP102	*C1
R94	*C3	R200	*C3	R321	D2	R443	*C3	R580	*A2	R721	*B2	R836	*B2	TP103	*C1
R95	*C3	R201	*C3	R322	C2	R444	*C3	R581	*A2	R722	*B2	R837	*B2	TP104	*C3
R96	*C3	R202	*C2	R323	D2	R445	*C3	R582	*A3	R723	*B2	R838	*B2	TP105	*C2
R97	*C3	R203	*C2	R324	C2	R446	*C3	R583	*A2	R724	*B2	R839	*B2	TP106	C2
R98	A2	R204	*C2	R325	D2	R447	*C2	R584	*A2	R725	*B2	R840	*B2	TP201	C2
R99	C3	R205	*C2	R326	D2	R448	*C2	R585	*A2	R726	*B2	R841	*B2	TP202	D2
R100	C3	R206	*C2	R327	*D2	R449	*C2	R586	*A2	R727	*B2	R842	*B2	TP203	D2
R101	D3	R207	*C2	R328	*D2	R450	*C2	R587	*A2	R728	*B2	R851	A3	TP204	D2
R102	D3	R208	*C3	R329	*D2	R451	*B2	R588	*A2	R729	*B2	R852	*A3	TP205	D2
R103	D3	R216	*C2	R330	*D2	R452	*B2	R589	A2	R730	*B2	R853	*A3	TP206	D2
R104	D2	R217	*C2	R331	*D2	R453	*B2	R590	A2	R731	*B2			TP207	D1
R105	D2	R218	*C2	R332	*D2	R454	*B2	R591	A2	R732	*B2	RB531	*B3	TP208	D1
R106	D2	R219	*C2	R333	*D2	R461	*B2	R592	A2	R733	*B3	RB532	*A3	TP209	D1
R108	*D2	R220	*C2	R334	D2	R462	*B2	R593	*A2	R734	*B2	RB533	A3	TP210	D1
R109	*D3	R221	*C2	R335	*D2	R463	*C2	R601	C3	R735	*B2	RB534	A3	TP401	B2
R110	*D3	R222	*C2	R336	*D2	R464	*C2	R602	*C3	R736	*B2	RB535	*A1	TP601	C3
R111	*D3	R223	*C2	R341	C1	R465	*C2	R603	*C3	R737	*B3	RB536	*A1	TP602	C3
R112	*D3	R224	*C2	R342	C1	R467	*C2	R604	*C3	R738	*B2	RB537	*A1	TP603	C3
R113	*D3	R225	*C2	R343	D1	R468	*C2	R605	*C3	R739	*B2	RB538	*A1	TP604	C1
R114	*D3	R226	*C2	R344	D1	R469	*B2	R606	*C3	R740	B3	RB601	C3	TP605	B1
R115	*D3	R227	*C2	R345	D1	R470	B3	R607	*C3	R741	B3	RB602	C3	TP721	B3
R116	*D3	R228	*C2	R346	D1	R501	*A1	R608	*C3	R742	*B3	RB603	C3	TP801	B2
R117	*D3	R229	*C2	R347	C1	R502	*A1	R609	*B2	R743	B3	RB604	*C3		
R118	*D3	R230	*C2	R348	D1	R503	*A1	R610	*A2	R744	B3	RB605	*C3	X101	D2
R119	*D3	R231	*C2	R349	C1	R504	*A1	R611	A2	R745	B3	RB606	*C3	X541	*A2
R120	*D3	R232	*C2	R350	D1	R505	A3	R612	*B1	R746	B3	RB607	*B3	X542	*A2
R121	*D3	R233	*C2	R351	D1	R506	*A1	R613	*A1	R747	B3	RB608	*B3	X543	A2
R122	*D3	R234	*C2	R352	*D1	R508	*A1	R614	*A1	R748	B3	RB609	B3	X544	A2
R123	D3	R241	*C2	R353	*D1	R509	*A1	R615	*A1	R749	B3	RB610	B3	X721	*B3
R124	D3	R242	*C2	R354	*D1	R510	A2	R616	*B1	R750	B3	RB611	*B3	X722	*B3
R125	D3	R243	*C2	R355	*D1	R511	A2	R617	*A1	R751	B3	RB612	*B3		
R126	D3	R244	*C2	R356	*D1	R512	A2	R618	*A1	R752	B3	RB613	*B2	*:B SIDE	
R127	D3	R245	*C2	R357	*D1	R513	A2	R619	*B1	R753	B3	RB614	*B2		
R128	*D3	R246	*C2	R358	*D1	R514	A2	R620	*A1	R754	B2	RB615	B2		
R129	*D3	R247	C2	R359	D1	R515	B2	R621	*A1	R755	B3	RB616	B2		
R130	*D3	R248	*C3	R360	*D1	R516	*A1	R622	*A1	R761	B1	RB617	*B2		
R131	*D3	R249	*C3	R361	*D1	R517	B2	R623	*B1	R762	B1	RB618	A2		
R132	*D3	R250	*C3	R366	C1	R518	*A1	R624	*A1	R763	*B1	RB619	A2		
R133	*D3	R251	*C3	R367	C1	R519	A2	R626	*B1	R764	*B1	RB620	A2		
R134	*D3	R252	*C3	R368	D1	R520	*A1	R628	A1	R765	*B1	RB621	B2		
R135	*D3	R253	*C3	R369	D1	R521	*A1	R629	A1	R766	*B1	RB622	A2		
R136	*D2	R261	D2	R370	D1	R522	*A1	R630	A1	R767	*B1	RB623	A2		

TR-136 (1-868-410-14)

C1	*C3	C163	*C2	C283	C1	C507	*A2	C707	B2	CL31	*A3	IC201	*C3	L402	C2
C2	A3	C164	*C2	C284	C1	C508	*B2	C708	B2	CL41	D3	IC202	D2	L403	*C2
C3	A3	C165	*C2	C285	D1	C509	*A2	C709	B2	CL42	D3	IC203	*D2	L404	*B2
C4	*A3	C166	*C2	C286	C1	C510	*A2	C710	B2	CL101	D3	IC204	D2	L405	*C2
C5	*A3	C167	*C3	C287	D1	C511	*A2	C721	*B2	CL102	C1	IC205	*D2	L406	*C1
C6	*A3	C171	*C2	C288	D1	C512	*A2	C722	*B2	CL103	C2	IC206	D2	L501	*A2
C7	*A3	C172	C2	C289	C1	C513	*A2	C723	*B2	CL104	C3	IC207	*D2	L502	*A2
C8	*A3	C173	*C2	C290	*C1	C514	*A2	C724	*B2	CL105	C2	IC208	D1	L503	*A1
C9	A3	C174	*C2	C291	*D1	C515	*B2	C725	*B2	CL201	D2	IC209	*D1	L511	*A2
C10	A3	C175	*C2	C292	*D1	C516	*B2	C726	*B2	CL401	B3	IC210	D1	L512	*A2
C11	B3	C176	*C2	C293	*D1	C517	*A2	C727	*B2	CL501	A2	IC211	*D1	L541	A2
C12	*A3	C177	*C2	C294	*D1	C518	*B2	C728	*B3	CL502	A2	IC401	B3	L542	*A2
C13	A3	C178	*C2	C295	*D1	C519	*A2	C729	*B2	CL503	A2	IC402	C3	L543	*A1
C14	A3	C179	*C2	C296	*D1	C520	*A2	C730	*B2	CL701	B2	IC404	C2	L544	*A3
C21	*A3	C180	*C2	C297	*D1	C521	*A2	C731	*B2	CL702	B2	IC405	C2	L545	*A2
C22	*A3	C181	*C2	C298	*D1	C522	*A2	C732	*B2	CL703	B2	IC406	*C3	L546	*A2
C31	A3	C182	*C2	C299	*D1	C523	*A2	C733	*B3	CL704	B2	IC407	*C2	L547	A2
C32	*A3	C186	*C2	C300	*D1	C524	*A2	C734	*B3	CL851	A2	IC408	*C2	L548	A2
C33	A3	C187	*C2	C301	*D1	C525	*A2	C735	B3			IC410	C2	L601	*A1
C34	A3	C188	*C2	C306	D1	C526	*A1	C736	B3	CN1	*C3	IC501	A2	L602	*B1
C41	D3	C189	*C2	C307	C1	C527	*A1	C737	B3	CN2	C3	IC504	A1	L603	*A1
C42	D3	C190	*C2	C308	C1	C528	*A2	C738	B2	CN3	A1	IC531	*A3	L604	*B1
C43	*D3	C191	*C3	C309	C1	C529	*A2	C739	B3	CN101	C2	IC532	A3	L605	*B1
C44	*D3	C192	*C3	C310	D1	C531	*B2	C761	*B1	CN601	B1	IC533	A3	L606	*B1
C45	*D3	C193	*C3	C311	C1	C532	A2	C762	*B1	CN602	B1	IC541	*A2	L607	*B1
C46	D3	C194	C2	C312	D1	C533	A3	C763	*B1			IC542	*A1	L608	*B1
C47	*D3	C201	D2	C313	D1	C541	*A2	C764	*B1	D1	*A3	IC543	A2	L609	*B1
C48	*D3	C202	C2	C314	C1	C542	*A2	C765	*B1	D2	*A3	IC545	*A2	L610	B1
C49	D3	C203	D3	C315	*C1	C543	A1	C766	*A1	D41	*D3	IC546	A2	L611	B2
C50	D3	C204	D3	C316	*D1	C544	*A1	C767	*A1	D42	*D3	IC601	*C3	L701	B2
C51	D3	C205	*C2	C317	*D1	C546	*A2	C768	B1	D43	*D3	IC602	*B3	L721	*B2
C52	D3	C208	*C2	C318	*D1	C547	*A2	C769	*A1	D101	*D2	IC603	B3	L722	*B2
C53	D3	C209	*C2	C319	*D1	C548	*A2	C770	*B2	D102	*D3	IC604	*B3	L723	*B3
C92	*C3	C210	D2	C320	*D1	C549	*A2	C771	*B2	D103	*D3	IC605	*A1	L724	*B3
C93	*C3	C211	C2	C321	*D1	C550	*A2	C772	*B2	D104	*C1	IC606	*B1	L725	B2
C94	*D3	C212	D2	C322	*D1	C552	*A1	C801	*B1	D105	*C1	IC607	*B1	L761	*A1
C95	A2	C213	D2	C323	*D1	C553	*A1	C802	*B1	D106	*C1	IC608	*B1	L801	*B1
C101	D3	C214	C2	C324	*D1	C554	*A2	C803	*B1	D107	*C1	IC701	B2	L802	*B1
C102	D3	C215	*C2	C325	*D1	C555	*A2	C804	*B1	D108	*C3	IC702	B3		
C103	D3	C216	*D2	C326	*D1	C556	A2	C805	*B1	D109	*C3	IC703	B2	LP101	C3
C104	D2	C217	*D2	C401	C3	C557	A2	C806	*B1	D110	*C2	IC721	*B2	LP601	B1
C105	D3	C218	*D2	C402	C3	C558	A2	C807	*B1	D111	*C2	IC722	*B2	LP602	C1
C106	D3	C219	*D2	C403	C3	C559	*A3	C808	*B1	D112	*C2	IC725	*B3		
C107	*D3	C220	*D2	C404	C3	C560	*A2	C809	*B1	D113	*C2	IC727	B3	LV101	D3
C108	*D3	C221	*D2	C405	B3	C561	*A2	C810	*B1	D201	*D2	IC728	B3	LV102	C1
C109	*D3	C222	*D2	C407	C3	C562	*A2	C811	*B1	D202	*C1	IC729	B3	LV103	C1
C110	*D3	C223	*D2	C408	C3	C563	A2	C812	*B1	D205	*C2	IC761	*B1	LV104	C2
C111	*D3	C224	*D2	C409	C3	C564	A2	C813	*B1	D208	*C1	IC763	*A1	LV105	C2
C112	*D3	C225	*D2	C410	B3	C565	*A2	C814	*B1	D211	*C1	IC801	*B1	LV202	D2
C113	*D3	C226	D2	C411	B3	C566	A2	C815	B2	D214	*D2	IC802	*B1	LV203	D1
C114	*D3	C231	D1	C412	B2	C601	*C3	C816	B2	D401	C2	IC803	*B1	LV204	D1
C115	*D3	C232	C2	C413	B3	C602	*B2	C817	B2	D402	C2	IC805	*B1	LV205	D2
C116	*D3	C233	C2	C414	C3	C603	A2	C818	B2	D403	C3	IC806	B2	LV206	D2
C117	D3	C234	D2	C415	C2	C604	*B2	C819	B2	D404	C3	IC807	*B2	LV207	D1
C118	D3	C235	C2	C416	C3	C605	*A1	C820	B2	D405	*B1	IC851	*A3	LV208	D1
C119	D3	C236	D2	C417	C2	C606	*B1	C821	B2	D406	*C1	IC852	*A3	LV209	D1
C120	*D3	C237	D1	C418	C2	C607	*A1	C822	B2	D541	A2	IC853	A3	LV210	D1
C121	*D3	C238	*C1	C419	C2	C608	*B1	C823	B2	D542	A2	IC854	A3		
C122	*D3	C239	*D1	C420	C2	C609	*A1	C824	B2	D721	*B2			Q1	*A3
C126	*C1	C240	*D2	C422	C2	C610	*B1	C825	B2	D722	*B2	JC1	*C3	Q2	*A3
C127	C1	C241	*D2	C423	C2	C611	*A1	C826	B2	D761	*B1	JC2	*C3	Q41	*D3
C128	*C1	C242	*D1	C425	C1	C612	*B1	C827	*B2			JC101	C3	Q42	*D3
C129	*C1	C243	*D1	C431	*C3	C613	*A1	C828	*B2	E1	B3	JC102	C3	Q101	D3
C130	*C1	C244	*D1	C432	*C3	C614	A1	C829	*B2	E2	C1	JC103	C1	Q102	*D3
C131	*C1	C245	*D1	C433	*C3	C615	*A1	C830	*B2	E4	D3	JC104	C1	Q103	D3
C132	*C1	C246	*D2	C434	*B3	C616	A1	C831	*B2	E11	*A1			Q104	D3
C133	*C1	C247	*D2	C435	*B3	C617	*A1	C832	*B2	E12	*B1	L1	A3	Q105	*D3
C134	*C1	C248	D1	C436	*C3	C618	A1	C833	*B2	E13	*C1	L2	A3	Q106	*C1
C135	*C1	C249	*D2	C437	*C2	C619	*B1	C834	*B2	E200	C2	L11	B3	Q107	*C1
C136	*C1	C256	D2	C438	*B3	C620	B1	C851	*A3			L21	*A3	Q108	*C1
C137	*C1	C257	C2	C439	*C2	C621	A1	C852	*A3	FL201	C3	L31	A3	Q109	*C1
C138	*C1	C258	C2	C440	*C2	C622	A1	C853	A3	FL202	D3	L41	D3	Q110	*C1
C141	*C1	C259	C2	C441	*B3	C623	*B1	C854	A3	FL601	A1	L101	D2	Q111	*C1
C142	C1	C260	D2	C442	*B2	C624	*B1			FL602	B1	L104	*C3	Q112	*C3
C143	*C1	C261	C2	C443	*B2	C625	B1	CF101	D3			L105	*C2	Q113	*C2
C144	*C1	C262	D2	C444	*C2	C626	B1	CF102	C1	IC1	*A3	L106	*C2	Q114	*C2
C145	*C1	C263	D2	C445	*C2	C627	B1	CF103	C1	IC11	*B3	L201	*C2	Q115	*C2
C146	*C1	C264	C2	C451	*B1	C628	B1	CF104	C3	IC21	*A3	L202	D2	Q116	*C2
C147	*C1	C265	*C2	C452	*B1	C629	B1	CF105	C2	IC31	*A3	L203	C2	Q117	*C2
C148	*C1	C266	*D2	C453	*C2	C630	B1	CF201	C2	IC41	*D3	L204	D1	Q201	*D2
C149	*C1	C267	*D2	C454	*B2	C631	*C1	CF202	C2	IC42	*D3	L205	D2	Q202	*D2
C150	*C1	C268	*D2	C455	*C2	C632	*B1	CF203	C2	IC61	*D2	L206	D2	Q401	B2
C151	*C1	C269	*D2	C456	*B2	C633	*B1	CF204	C2	IC63	*D2	L207	C2	Q541	*A2
C152	*C1	C270	*D2	C457	*B2	C634	*B1	CF205	C1	IC92	*C3	L208	D2	Q542	*A2
C153	*C1	C271	*D2	C458	*C2	C635	*B1	CF206	C1	IC93	*C3	L209	D1	Q543	*A2
C156	*C3	C272	*D2	C459	*C1	C636	*B1	CF207	C1	IC94	A2	L210	C1	Q721	*B3
C157	C3	C273	*D2	C501	*A2	C701	B2	CF208	C1	IC101	D2	L211	D1	Q722	*B3
C158	*C3	C274	*D2	C502	*A2	C702	B3			IC102	*D3	L212	D1	Q761	*B1
C159	*C3	C275	*D2	C503	*B2	C703	B2	CL1	*A3	IC103	*D3	L213	C1	Q801	*B2
C160	*C2	C276	*D2	C504	*B2	C704	B2	CL2	*A3	IC104	*D3	L214	D1	Q802	*B2
C161	*C2	C281	D1	C505	*B2	C705	B2	CL11	*A3	IC105	*C2	L215	D2		
C162	*C2	C282	C1	C506	*B2	C706	B2	CL21	*A3	IC106	*D2	L401	B3	R1	*A3

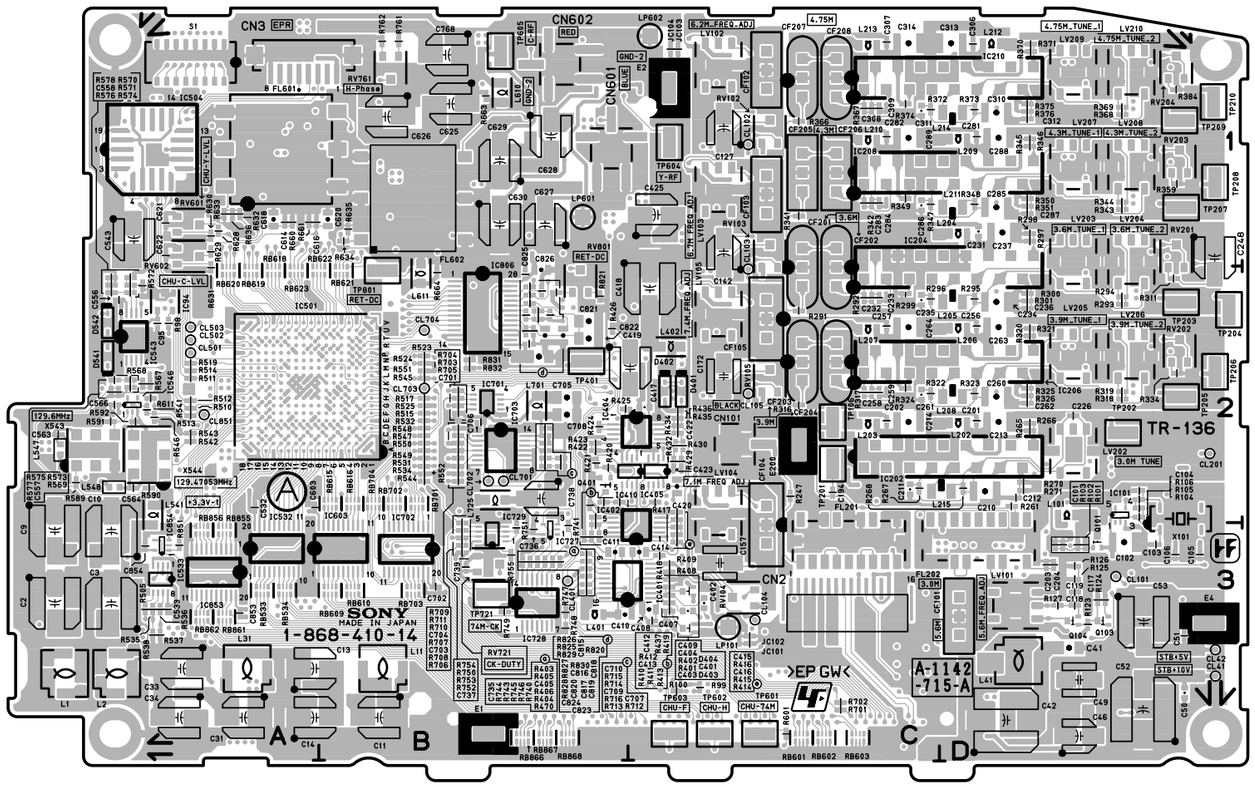

TR-136 -A SIDE-
SUFFIX: -14

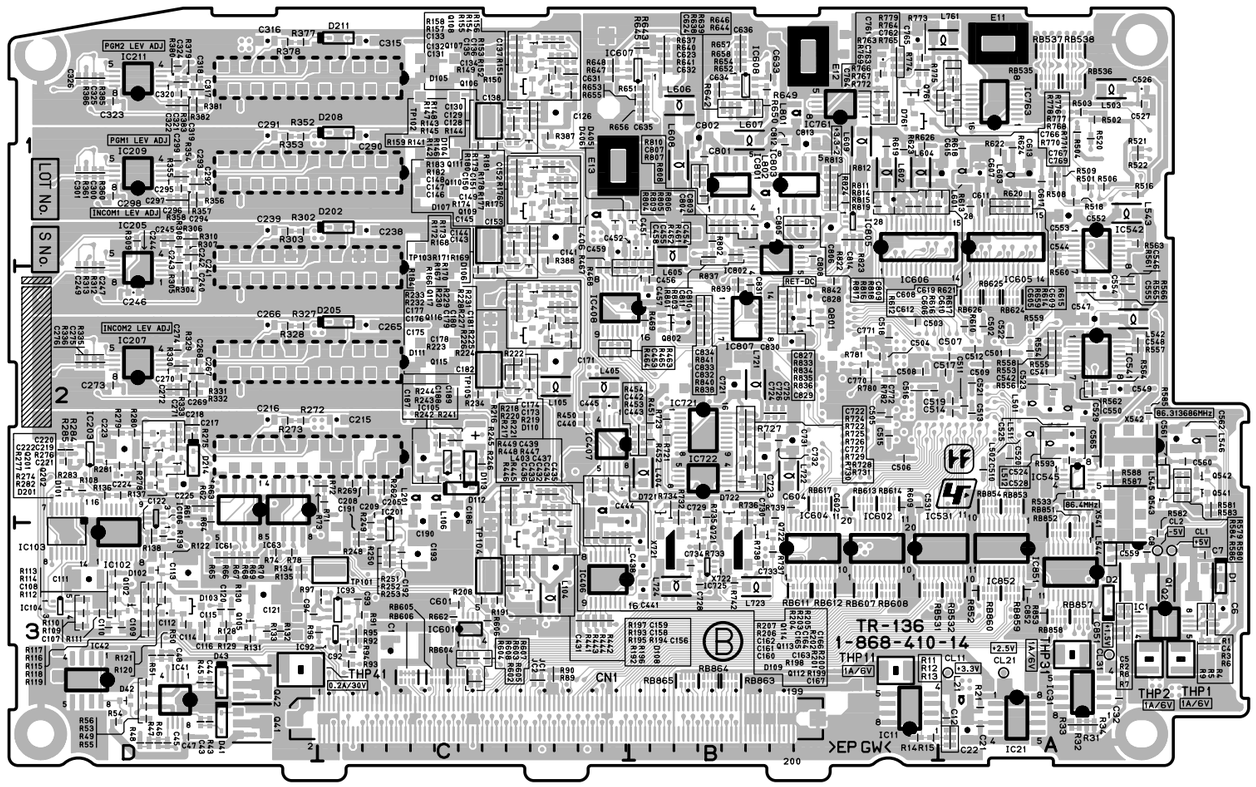


TR-136 -B SIDE-
SUFFIX: -14

R2	*A3	R137	*D2	R262	*C2	R371	D1	R521	*A1	R629	A1	R766	*B1	RB622	A2
R3	*A3	R138	*D3	R265	D2	R372	C1	R522	*A1	R630	A1	R767	*B1	RB623	A2
R4	*A3	R139	*D3	R266	D2	R373	D1	R523	B2	R631	A2	R768	*A1	RB624	*A2
R5	*A3	R141	*C1	R267	C2	R374	C1	R524	B2	R632	A1	R769	*B1	RB625	*A2
R6	*A3	R142	*C1	R268	D2	R375	D1	R525	B2	R633	A1	R770	*A1	RB626	*A2
R7	*A3	R143	*C1	R269	*C2	R376	D1	R531	B2	R634	B1	R771	*A1	RB701	B2
R8	*A3	R144	*C1	R270	D2	R377	*D1	R532	B2	R635	B1	R772	*B1	RB702	B2
R9	*A3	R145	*C1	R271	D2	R378	*D1	R533	*A2	R636	A1	R773	*B1	RB703	B3
R11	*A3	R146	*C1	R272	*D2	R379	*D1	R534	B2	R637	*B1	R774	*B1	RB704	B2
R12	*A3	R147	*C1	R273	*D2	R380	*D1	R535	A3	R638	*B1	R775	*B1	RB851	*A3
R13	*A3	R148	*C1	R274	*D2	R381	*D1	R536	A3	R639	*B1	R776	*A1	RB852	*A3
R14	*B3	R149	*C1	R275	*D2	R382	*D1	R537	A3	R640	*B1	R777	*A1	RB853	*A2
R15	*B3	R150	*C1	R276	*D2	R383	*D1	R538	A3	R641	*B1	R778	*A1	RB854	*A2
R21	*A3	R151	*C1	R277	*D2	R384	D1	R541	A2	R642	*B1	R779	*B1	RB855	A3
R31	*A3	R152	*C1	R278	*D2	R385	*D1	R542	A2	R643	*B1	R780	*B2	RB856	A3
R32	*A3	R153	*C1	R279	*D2	R386	*D1	R543	A2	R644	*B1	R781	*B2	RB857	*A3
R33	*A3	R154	*C1	R280	*D2	R387	*C1	R544	B2	R645	*B1	R782	*B2	RB858	*A3
R34	*A3	R155	*C1	R281	*D2	R388	*C1	R545	B2	R646	*B1	R801	*B1	RB859	*A3
R43	*D3	R156	*C1	R282	*D2	R401	C3	R546	A2	R647	*C1	R802	*B1	RB860	*A3
R45	*D3	R157	*C1	R283	*D2	R402	C3	R547	B2	R648	*C1	R803	*B1	RB861	A3
R46	*D3	R158	*C1	R284	*D2	R403	B3	R548	B2	R649	*B1	R804	*B1	RB862	A3
R47	*D3	R159	*C1	R285	*D2	R404	B3	R549	B2	R650	*B1	R805	*B1	RB863	*B3
R48	*D3	R166	*C2	R291	C2	R405	B3	R550	B2	R651	*B1	R806	*B1	RB864	*B3
R49	*D3	R167	*C1	R292	C2	R406	B3	R551	B2	R652	*B1	R807	*B1	RB865	*B3
R50	*D3	R168	*C1	R293	D2	R408	C3	R552	B2	R653	*B1	R808	*B1	RB866	B3
R51	*D3	R169	*C1	R294	D2	R409	C3	R553	*A2	R654	*B1	R809	*B1	RB867	B3
R53	*D3	R170	*C1	R295	D2	R410	B3	R554	*A2	R655	*B1	R810	*B1	RB868	B3
R54	*D3	R171	*C1	R296	C2	R411	B3	R555	*A2	R656	*B1	R811	*B1		
R55	*D3	R172	*C1	R297	D1	R412	B2	R556	*A2	R657	*B1	R812	*B1	RV102	C1
R56	*D3	R173	*C1	R298	D1	R413	B3	R557	*A2	R658	*B1	R813	*B1	RV103	C1
R61	*D2	R174	*C1	R299	C2	R414	C3	R558	*A2	R659	*A1	R814	*B1	RV104	C3
R62	*D2	R175	*C1	R300	D2	R415	C3	R559	*A2	R660	A1	R815	*B1	RV105	C2
R63	*D2	R176	*C1	R301	D2	R416	C2	R560	*A1	R661	A1	R816	*B1	RV201	D1
R64	*D2	R177	*C1	R302	*D1	R417	C2	R561	*A2	R662	*C3	R817	*B1	RV202	D2
R65	*D3	R178	*C1	R303	*D1	R418	C3	R562	*A2	R663	B1	R818	*B1	RV203	D1
R66	*D3	R179	*C1	R304	*D2	R419	B2	R563	*A1	R664	B2	R819	*B1	RV204	D1
R67	*D3	R180	*C1	R305	*D2	R420	B2	R564	*A2	R701	C3	R820	B2	RV601	A1
R68	*D3	R181	*C1	R306	*D1	R421	B2	R565	*A2	R702	C3	R821	B2	RV602	A1
R69	*D3	R182	*C1	R307	*D1	R422	B2	R566	*A2	R703	B2	R822	*B1	RV721	B3
R70	*D3	R183	*C1	R308	*D1	R423	B2	R567	A2	R704	B2	R823	*B1	RV761	B1
R71	*C2	R184	*C2	R309	*D1	R424	B2	R568	A2	R705	B2	R824	*B1	RV801	B2
R72	*C2	R191	*C3	R310	*D1	R425	B2	R569	A2	R706	B2	R825	B2		
R73	*D2	R192	*C3	R311	D2	R426	B2	R570	A2	R707	B2	R826	B2	S1	A1
R74	*D3	R193	*C3	R312	*D2	R429	C2	R571	A2	R708	B2	R827	B2		
R78	*D3	R194	*C3	R313	*D2	R430	C2	R572	A2	R709	B2	R828	B2	THP1	*A3
R89	*C3	R195	*C3	R316	C2	R432	C2	R573	A2	R710	B2	R829	B2	THP2	*A3
R90	*C3	R196	*C3	R317	C2	R434	C2	R574	A2	R711	B2	R830	B2	THP11	*B3
R91	*C3	R197	*C3	R318	D2	R435	C2	R575	A2	R712	B2	R831	B2	THP31	*A3
R92	*C3	R198	*C3	R319	D2	R436	C2	R576	A2	R713	B2	R832	B2	THP41	*D3
R93	*C3	R199	*C3	R320	D2	R437	B2	R577	A2	R714	B2	R833	*B2		
R94	*C3	R200	*C3	R321	D2	R441	*C3	R578	A2	R715	B2	R834	*B2	TP101	*C3
R95	*C3	R201	*C3	R322	C2	R442	*C3	R579	*A2	R716	B2	R835	*B2	TP102	*C1
R96	*C3	R202	*C2	R323	D2	R443	*C3	R580	*A2	R721	*B2	R836	*B2	TP103	*C1
R97	*C3	R203	*C2	R324	C2	R444	*C3	R581	*A2	R722	*B2	R837	*B2	TP104	*C3
R98	A2	R204	*C2	R325	D2	R445	*C3	R582	*A3	R723	*B2	R838	*B2	TP105	*C2
R99	C3	R205	*C2	R326	D2	R446	*C3	R583	*A2	R724	*B2	R839	*B2	TP106	C2
R100	C3	R206	*C2	R327	*D2	R447	*C2	R584	*A2	R725	*B2	R840	*B2	TP201	C2
R101	D3	R207	*C2	R328	*D2	R448	*C2	R585	*A2	R726	*B2	R841	*B2	TP202	D2
R102	D3	R208	*C3	R329	*D2	R449	*C2	R586	*A2	R727	*B2	R842	*B2	TP203	D2
R103	D3	R216	*C2	R330	*D2	R450	*C2	R587	*A2	R728	*B2	R851	A3	TP204	D2
R104	D2	R217	*C2	R331	*D2	R451	*B2	R588	*A2	R729	*B2	R852	*A3	TP205	D2
R105	D2	R218	*C2	R332	*D2	R452	*B2	R589	A2	R730	*B2	R853	*A3	TP206	D2
R106	D2	R219	*C2	R333	*D2	R453	*B2	R590	A2	R731	*B2			TP207	D1
R108	*D2	R220	*C2	R334	D2	R454	*B2	R591	A2	R732	*B2	RB531	*B3	TP208	D1
R109	*D3	R221	*C2	R335	*D2	R461	*B2	R592	A2	R733	*B3	RB532	*A3	TP209	D1
R110	*D3	R222	*C2	R336	*D2	R462	*B2	R593	*A2	R734	*B2	RB533	A3	TP210	D1
R111	*D3	R223	*C2	R341	C1	R463	*C2	R601	C3	R735	*B2	RB534	A3	TP401	B2
R112	*D3	R224	*C2	R342	C1	R464	*C2	R602	*C3	R736	*B2	RB535	*A1	TP601	C3
R113	*D3	R225	*C2	R343	D1	R465	*C2	R603	*C3	R737	*B3	RB536	*A1	TP602	C3
R114	*D3	R226	*C2	R344	D1	R467	*C2	R604	*C3	R738	*B2	RB537	*A1	TP603	C3
R115	*D3	R227	*C2	R345	D1	R468	*C2	R605	*C3	R739	*B2	RB538	*A1	TP604	C1
R116	*D3	R228	*C2	R346	D1	R469	*B2	R606	*C3	R740	B3	RB601	C3	TP605	B1
R117	*D3	R229	*C2	R347	C1	R470	B3	R607	*C3	R741	B3	RB602	C3	TP721	B3
R118	*D3	R230	*C2	R348	D1	R501	*A1	R608	*C3	R742	*B3	RB603	C3	TP801	B2
R119	*D3	R231	*C2	R349	C1	R502	*A1	R609	*B2	R743	B3	RB604	*C3		
R120	*D3	R232	*C2	R350	D1	R503	*A1	R610	*A2	R744	B3	RB605	*C3	X101	D2
R121	*D3	R233	*C2	R351	D1	R504	*A1	R611	A2	R745	B3	RB606	*C3	X541	*A2
R122	*D3	R234	*C2	R352	*D1	R505	A3	R612	*B1	R746	B3	RB607	*B3	X542	*A2
R123	D3	R241	*C2	R353	*D1	R506	*A1	R613	*A1	R747	B3	RB608	*B3	X543	A2
R124	D3	R242	*C2	R354	*D1	R508	*A1	R614	*A1	R748	B3	RB609	B3	X544	A2
R125	D3	R243	*C2	R355	*D1	R509	*A1	R615	*A1	R749	B3	RB610	B3	X721	*B3
R126	D3	R244	*C2	R356	*D1	R510	A2	R616	*B1	R750	B3	RB611	*B3	X722	*B3
R127	D3	R245	*C2	R357	*D1	R511	A2	R617	*A1	R751	B3	RB612	*B3		
R128	*D3	R246	*C2	R358	*D1	R512	A2	R618	*A1	R752	B3	RB613	*B2	*:B SIDE	
R129	*D3	R247	C2	R359	D1	R513	A2	R619	*B1	R753	B3	RB614	*B2		
R130	*D3	R248	*C3	R360	*D1	R514	A2	R620	*A1	R754	B2	RB615	B2		
R131	*D3	R249	*C3	R361	*D1	R515	B2	R621	*A1	R755	B3	RB616	B2		
R132	*D3	R250	*C3	R366	C1	R516	*A1	R622	*A1	R761	B1	RB617	*B2		
R133	*D3	R251	*C3	R367	C1	R517	B2	R623	*B1	R762	B1	RB618	A2		
R134	*D3	R252	*C3	R368	D1	R518	*A1	R624	*A1	R763	*B1	RB619	A2		
R135	*D3	R253	*C3	R369	D1	R519	A2	R626	*B1	R764	*B1	RB620	A2		
R136	*D2	R261	D2	R370	D1	R520	*A1	R628	A1	R765	*B1	RB621	B2		

VDA-63 (1-865-931-12)

C1	*C4	C153	A3	C355	A2																		
C2	C1	C154	*B3	C356	*A2																		
C3	*C1	C155	A3	C357	*C3																		
C4	*C5	C156	*A3	C358	A2																		
C5	*C5	C157	*B3	C359	A2																		
C6	C1	C158	*B3	C360	*C4																		
C7	C5	C159	*A3	C361	A2																		
C8	C5	C160	B3	C362	*C4																		
C9	*B1	C161	B3	C363	*C3																		
C10	*C5	C162	A3	C364	*C4																		
C11	*C5	C163	B3	C365	B3																		
C12	B1	C164	B3	C366	A2																		
C13	*C1	C165	A3	C367	*C4																		
C14	*A1	C166	*B3	C368	B3																		
C15	B1	C167	*B3	C369	*C4																		
C16	*A1	C168	*A3	C370	A2																		
C17	*B4	C169	*B3	C371	A2																		
C18	*C4	C170	*B3	C372	A2																		
C19	B5	C171	*A3	C373	*B4																		
C20	*B1	C172	*B3	C374	*B4																		
C21	*B1	C173	*B3	C375	*B3																		
C22	B1	C174	*A3	C376	*B3																		
C23	A1	C175	*B3	C377	*B4																		
C24	*C5	C176	*B3	C378	*B4																		
C25	*A1	C177	*A3	C379	*C4																		
C26	A1	C178	*B3	C380	C4																		
C27	A1	C179	*B3	C381	*B5																		
C28	*A1	C180	*A3	C382	A4																		
C29	*B1	C181	*A3	C383	*B4																		
C30	A1	C182	*B3	C384	*B4																		
C31	B1	C183	*B3	C385	*C4																		
C32	*B5	C184	*B3	C386	*C4																		
C33	*B5	C185	*B3	C387	*A5																		
C34	B5	C186	*A3	C388	A3																		
C35	B5	C187	*A3	C389	*C4																		
C36	*A1	C188	*B3	C390	*B4																		
C37	B1	C189	*B3	C391	B4																		
C38	*C1	C300	*A5	C392	*B4																		
C39	*B1	C301	*A5	C393	*B4																		
C40	*C2	C302	*A5	C394	B4																		
C41	*C2	C303	*A5	C395	B4																		
C100	*A2	C304	*C2	C396	B4																		
C103	*A2	C305	A4	C397	*B4																		
C104	*A2	C306	A5	C398	*B4																		
C105	*A2	C307	*A5	C399	B4																		
C106	*A2	C308	*A4	C400	B4																		
C107	*A2	C309	*A5	C401	A5																		
C108	*C3	C310	*A4	C402	B5																		
C109	A2	C311	*A5	C403	B5																		
C110	A2	C312	*A4	C404	*B5																		
C111	A2	C313	*A4	C405	*B5																		
C112	A2	C314	*A4	C406	*B5																		
C113	A2	C315	*A4	C407	*B5																		
C114	A2	C316	*A4	C408	*B5																		
C115	*C1	C317	*A4	C409	B4																		
C116	*C1	C318	*A4	C410	*B4																		
C117	*C1	C319	*A4	C411	A4																		
C118	A2	C320	*A3	C412	*A4																		
C119	*C2	C321	*A4	C413	*B4																		
C120	*A3	C322	*A4	C414	B4																		
C121	A3	C323	A4	C415	*A4																		
C122	*A1	C324	A4	C416	A4																		
C123	*A1	C325	A3	C417	B4																		
C124	*B2	C326	*A4	C418	A4																		
C125	*B1	C327	*A4	C419	B4																		
C126	*B2	C328	*A4	C420	*B4																		
C127	*B2	C329	A4	C421	A4																		
C128	*B2	C330	A4	C422	*A4	D3	*C5	IC107	A3	IC315	*B4	L106	B3	L313	*A5	L338	*B4	Q319	B5	R20	*B5	R120	A2	R145	*C3	R170	*A3	R195	B3
C129	*B2	C331	*A4	C423	*B4			IC108	*C2	IC316	*C4	L107	B3	L314	A2	L339	*A4	Q320	A5	R21	*C2	R121	A2	R146	B2	R171	*B3	R196	A3
C130	*B2	C332	A4	C424	B4	E1	B1	IC109	A1	IC317	A4	L108	A3	L315	A2			Q321	B5	R22	*C2	R122	A2	R147	*B2	R172	*B3	R197	B3
C131	*B2	C333	*A4	C425	*A4			IC110	B2	IC318	B4	L109	B3	L316	*C4	Q1	*C1	Q322	B5	R23	A1	R123	A2	R148	*B2	R173	*A3	R198	A3
C132	*B2	C334	*A3	C426	A4	FB1	B1	IC111	*B3	IC319	B4	L110	B3	L317	*C4	Q2	*C5	Q323	B5	R24	A1	R124	*C2	R149	B2	R174	*B3	R199	B3
C133	*B2	C335	A3	C427	B4	FB2	B1	IC112	*B3	IC320	*B5	L111	A3	L318	*B3	Q3	*C5			R25	*C2	R125	*C2	R150	B2	R175	*B3	R200	B3
C134	*B2	C336	*A3	C428	A4	FB100	*C2	IC113	*A3	IC321	B4	L112	*B3	L319	*B4	Q300	A5	R1	*C5	R26	*C2	R126	*C2	R151	*B2	R176	*A3	R201	B3
C135	*B2	C337	*A3			FB101	*C2	IC114	B3	IC322	A4	L113	*A3	L320	B4	Q301	A5	R2	*C5	R100	*A2	R127	*C2	R152	*B2	R177	*B3	R202	A3
C136	*B2	C338	*C4	CL1	B1	FB102	*C2	IC115	A3	IC323	B4	L114	*B3	L321	*C4	Q302	A5	R3	B1	R101	*A2	R128	A2	R153	*B2	R178	*B3	R203	B3
C137	*B1	C339	*C4	CL2	B5			IC116	B3	IC324	A4	L115	*B3	L322	*A5	Q303	A4	R4	B1	R102	C1	R129	A2	R154	*B2	R179	*B3	R204	B3
C138	*B2	C340	*C4	CL3	B5	FL100	B3	IC300	C2	IC325	*A4	L116	*A3	L323	B4	Q304	B3	R5	*C1	R103	C1	R130	A2	R155	*B2	R180	*B3	R205	B3
C139	*B2	C341	C4	CL4	A1	FL101	B3	IC301	*A4	IC326	A4	L117	*B3	L324	C4	Q305	B3	R6	B1	R106	*A2	R131	A1	R156	*B2	R181	*B3	R206	A3
C140	*B2	C342	C4	CL7	C5	FL102	A3	IC302	*A3	IC327	A4	L300	*A5	L325	*B5	Q306	B3	R7	*C4	R107	*A2	R132	A1	R157	*B2	R182	*B3	R207	A3
C141	*B2	C343	*B4	CL100	C2	FL300	C4	IC303	A3			L301	*A5	L326	*B4	Q307	B3	R8	*C4	R108	*A2	R133	A2	R158	*B2	R183	*B3	R208	B3
C142	*B2	C344	*B4	CL101	*B2			IC304	A3	L1	B1	L302	*C2	L327	*B4	Q308	B4	R9	*B5	R109	*A2	R134	A2	R159	*B2	R184	*A3	R209	B3
C143	*B2	C345	A3	CL102	*B2	IC1	A1	IC305	*A3	L2	A1	L303	*A4	L328	*B4	Q309	B4	R10	*B1	R110	*A2	R135	*B2	R160	*B2	R185	*A3	R210	B3
C144	*B2	C346	*A2	CL104	B3	IC2	*B5	IC306	*C4	L3	B1	L304	*A5	L329	*B4	Q310	B4	R11	*B1	R111	*A2	R136	*A2	R161	*B2	R186	*A3	R211	B3
C145	B3	C347	A5	CL105	B3	IC3	*B1	IC307	*A3	L4	*B4	L305	*A5	L330	*A5	Q311	B4	R12	*B1	R112	*A2	R137	*C2	R162	*C4	R187	*B3	R212	B3
C146	B3	C348	*A5	CL106	A3	IC4	*C5	IC308	A3	L5	*B5	L306	*A4	L331	*B5	Q312	A5	R13	*B1	R113	*A2	R138	C1	R163	*B2	R188	*B3	R213	A3
C147	A3	C349	*A5			IC100	*A2	IC309	*A2	L6	*B5	L307	*A4	L332	*B4	Q313	B5	R14	*B1	R114	*A2	R139	C1	R164	*B2	R189	*A3	R214	A3
C148	B3	C350	A5	CN100	A2	IC102	*A2	IC310	A5	L101	*A1	L308	*A3	L333	*A4	Q314	A5	R15	*B5	R115	*A2	R140	B2	R165	*A2	R190	B3	R215	A3
C149	B3	C351	A4	CN101	C3	IC103	C3	IC311	*A2	L102	A2	L309	*C4	L334	*B4	Q315	B5	R16	A1	R116	B1	R141	B2	R166	*B3	R191	B3	R216	B3
C150	A3	C352	*A2			IC104	A2	IC312	*B3	L103	*A1	L310	B4	L335	*A4	Q316	B5	R17	A1	R117	*A2	R142	B2	R167	*B3	R192	B3	R217	B3
C151	B3	C353	*A2	D1	*C1	IC105	*C1	IC313	*B4	L104	*B1	L311	B4	L336	*B4	Q317	B5	R18	A1	R118	*A2	R143	B2	R168	*B3	R193	A3	R218	B3
C152	*B3	C354	*A2	D2	*C5	IC106	*A3	IC314	A2	L105	*B1	L312	*A4	L337	*A4	Q318	A5	R19	B5	R119	A2	R144	*B2	R169	*A3	R194	B3	R219	*B3

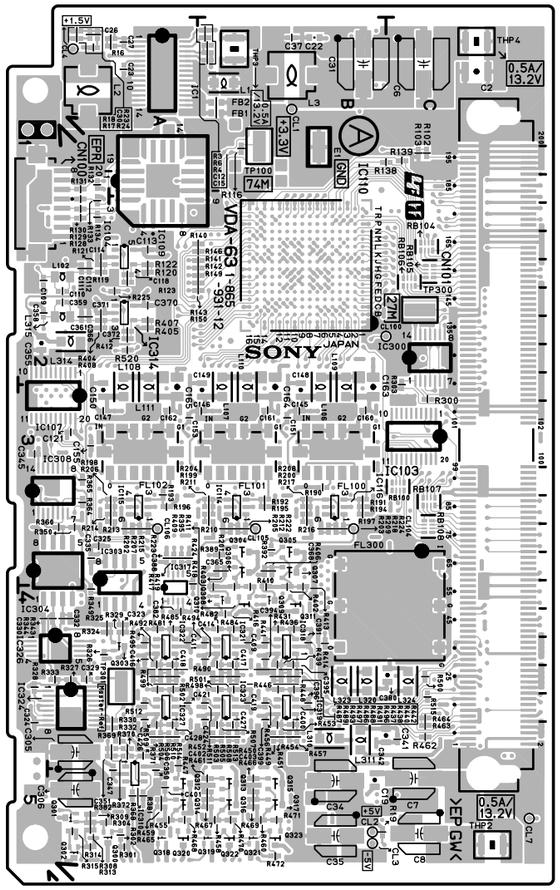


VDA-63 -A SIDE-
SUFFIX: -12

VDA-63 -B SIDE-
SUFFIX: -12


R220	*A3	R386	*C3	R478	*B5																		
R221	*B3	R387	*C3	R479	*B5																		
R222	B3	R388	*C3	R480	*B5																		
R223	A3	R389	B3	R481	A4																		
R224	B3	R390	*C3	R482	B4																		
R225	A2	R391	*A2	R483	*C4																		
R300	C3	R392	B3	R484	B4																		
R301	A5	R393	*C3	R485	A4																		
R302	A5	R394	*C3	R486	B4																		
R303	C2	R395	B4	R487	A4																		
R304	A5	R396	*C3	R488	B4																		
R305	*C2	R397	*C3	R489	A4																		
R306	*C2	R398	*C4	R490	B4																		
R307	*C2	R399	*C3	R491	B4																		
R308	A5	R400	*C3	R492	A4																		
R309	A5	R401	*C3	R493	A4																		
R310	*C2	R402	B4	R494	B4																		
R311	*A5	R403	B3	R495	A4																		
R312	*A5	R404	A2	R496	B4																		
R313	A5	R405	A2	R497	A4																		
R314	A5	R406	B3	R498	B4																		
R315	A5	R407	A2	R499	A4																		
R316	*C2	R408	A2	R500	C4																		
R317	*A4	R409	B4	R501	B4																		
R318	*A4	R410	B4	R502	A4																		
R319	*A4	R411	B4	R503	B4																		
R320	*A4	R412	A2	R504	A4																		
R321	*A4	R413	B4	R505	B4																		
R322	*A4	R414	B4	R506	A4																		
R323	*A4	R415	*C4	R507	B4																		
R324	A4	R416	B4	R508	B4																		
R325	A4	R417	A3	R509	A4																		
R326	A4	R418	A3	R510	A4																		
R327	A4	R419	A3	R511	B4																		
R328	A4	R420	*C4	R512	A4																		
R329	A4	R421	*B4	R513	B4																		
R330	A4	R422	*B4	R514	A4																		
R331	*A4	R423	*C4	R515	C4																		
R332	A4	R424	A3	R516	*C4																		
R333	A4	R425	*B4	R517	*C4																		
R334	*A3	R426	*B4	R518	*C4																		
R335	*A3	R427	*B4	R519	*C4																		
R336	*A3	R428	*C4	R520	A2																		
R337	*A3	R429	*C4																				
R338	*C2	R430	*C4	RB100	C3																		
R339	*A4	R431	B4	RB102	*C1																		
R340	*A4	R432	*B4	RB103	*C2																		
R341	*A4	R433	*C4	RB104	C2																		
R342	*A4	R434	*B4	RB105	C2																		
R343	A4	R435	*C4	RB106	C2																		
R344	A4	R436	B4	RB107	C3																		
R345	*A4	R437	B4	RB108	C3																		
R346	*A4	R438	B4	RB109	*C3																		
R347	*A3	R439	B4	RB110	*C3																		
R348	*C4	R440	B4	RB111	*B2																		
R349	A4	R441	B4	RB112	*B2																		
R350	A3	R442	B4	RB113	*B2																		
R351	*C4	R443	*C4	RB114	*B2																		
R352	*A3	R444	*C4	RB115	*B2																		
R353	*C4	R445	*C3	RB116	*B2																		
R354	*C4	R446	B4	RB117	*A2																		
R355	*C4	R447	A4	RB118	*A2																		
R356	*C4	R448	B4	RB119	*A2																		
R357	*C4	R449	B4	RB300	*C2																		
R358	*C4	R450	B5	RB301	*B4																		
R359	*C4	R451	B4	RB302	*B4																		
R360	A3	R452	B5	RB303	*B3																		
R361	*A3	R453	B4																				
R362	*A3	R454	B4	THP1	*C5																		
R363	*A3	R455	A5	THP2	C5																		
R364	A3	R456	B4	THP3	B1																		
R365	A3	R457	B4	THP4	C1																		
R366	*A2	R458	B5																				
R367	*A2	R459	A5	TP100	B1																		
R368	A5	R460	B5	TP300	C2																		
R369	A4	R461	B5	TP301	A4																		
R370	A4	R462	C4																				
R371	A4	R463	C4	*:B SIDE																			
R372	A4	R464	C4																				
R373	*A2	R465	A5																				
R374	*A2	R466	B5																				
R375	*A2	R467	B5																				
R376	*A2	R468	A5																				
R377	*A2	R469	B5																				
R378	*A2	R470	B5																				
R379	*A2	R471	B5																				
R380	*A2	R472	B5																				
R381	A5	R473	*B5																				
R382	A4	R474	*B5																				
R383	*A2	R475	*B5																				
R384	*A2	R476	*B5																				
R385	*A2	R477	*B5																				

VDA-63 (1-865-931-13)

C1	*C4	C153	A3	C355	A2			IC105	*C1	IC313	*B4	L104	*B1	L311	B4	L336	*B4	Q317	B5	R18	A1	R118	*A2	R143	B2	R168	*B3	R193	A3
C2	C1	C154	*B3	C356	*A2			IC106	*A3	IC314	A2	L105	*B1	L312	*A4	L337	*A4	Q318	A5	R19	B5	R119	A2	R144	*B2	R169	*A3	R194	B3
C3	*C1	C155	A3	C357	*C3			IC107	A3	IC315	*B4	L106	B3	L313	*A5	L338	*B4	Q319	B5	R20	*B5	R120	A2	R145	*C3	R170	*A3	R195	B3
C4	*C5	C156	*A3	C358	A2			IC108	*C2	IC316	*C4	L107	B3	L314	A2	L339	*A4	Q320	A5	R21	*C2	R121	A2	R146	B2	R171	*B3	R196	A3
C5	*C5	C157	*B3	C359	A2			IC109	A1	IC317	A4	L108	A3	L315	A2			Q321	B5	R22	*C2	R122	A2	R147	*B2	R172	*B3	R197	B3
C6	C1	C158	*B3	C360	*C4			IC110	B2	IC318	B4	L109	B3	L316	*C4	Q1	*C1	Q322	B5	R23	A1	R123	A2	R148	*B2	R173	*A3	R200	B3
C7	C5	C159	*A3	C361	A2			IC111	*B3	IC319	B4	L110	B3	L317	*C4	Q2	*C5	Q323	B5	R24	A1	R124	*C2	R149	B2	R174	*B3	R201	B3
C8	C5	C160	B3	C362	*C4			IC112	*B3	IC320	*B5	L111	A3	L318	*B3	Q3	*C5			R25	*C2	R125	*C2	R150	B2	R175	*B3	R202	A3
C9	*B1	C161	B3	C363	*C3			IC113	*A3	IC321	B4	L112	*B3	L319	*B4	Q300	A5	R1	*C5	R26	*C2	R126	*C2	R151	*B2	R176	*A3	R203	B3
C10	*C5	C162	A3	C364	*C4			IC114	B3	IC322	A4	L113	*A3	L320	B4	Q301	A5	R2	*C5	R100	*A2	R127	*C2	R152	*B2	R177	*B3	R205	B3
C11	*C5	C163	B3	C365	B3			IC115	A3	IC323	B4	L114	*B3	L321	*C4	Q302	A5	R3	B1	R101	*A2	R128	A2	R153	*B2	R178	*B3	R207	A3
C12	B1	C164	B3	C366	A2			IC116	B3	IC324	A4	L115	*B3	L322	*A5	Q303	A4	R4	B1	R102	C1	R129	A2	R154	*B2	R179	*B3	R208	B3
C13	*C1	C165	A3	C367	*C4			IC300	C2	IC325	*A4	L116	*A3	L323	B4	Q304	B3	R5	*C1	R103	C1	R130	A2	R155	*B2	R180	*B3	R209	B3
C14	*A1	C166	*B3	C368	B3			IC301	*A4	IC326	A4	L117	*B3	L324	C4	Q305	B3	R6	B1	R106	*A2	R131	A1	R156	*B2	R181	*B3	R210	B3
C15	B1	C167	*B3	C369	*C4			IC302	*A3	IC327	A4	L300	*A5	L325	*B5	Q306	B3	R7	*C4	R107	*A2	R132	A1	R157	*B2	R182	*B3	R211	B3
C16	*A1	C168	*A3	C370	A2			IC303	A3			L301	*A5	L326	*B4	Q307	B3	R8	*C4	R108	*A2	R133	A2	R158	*B2	R183	*B3	R212	B3
C17	*B4	C169	*B3	C371	A2			IC304	A3	L1	B1	L302	*C2	L327	*B4	Q308	B4	R9	*B5	R109	*A2	R134	A2	R159	*B2	R184	*A3	R213	A3
C18	*C4	C170	*B3	C372	A2			IC305	*A3	L2	A1	L303	*A4	L328	*B4	Q309	B4	R10	*B1	R110	*A2	R135	*B2	R160	*B2	R185	*A3	R214	A3
C19	B5	C171	*A3	C373	*B4			IC306	*C4	L3	B1	L304	*A5	L329	*B4	Q310	B4	R11	*B1	R111	*A2	R136	*A2	R161	*B2	R186	*A3	R215	A3
C20	*B1	C172	*B3	C374	*B4			IC307	*A3	L4	*B4	L305	*A5	L330	*A5	Q311	B4	R12	*B1	R112	*A2	R137	*C2	R162	*C4	R187	*B3	R216	B3
C21	*B1	C173	*B3	C375	*B3			IC308	A3	L5	*B5	L306	*A4	L331	*B5	Q312	A5	R13	*B1	R113	*A2	R138	B1	R163	*B2	R188	*B3	R217	B3
C22	B1	C174	*A3	C376	*B3			IC309	*A2	L6	*B5	L307	*A4	L332	*B4	Q313	B5	R14	*B1	R114	*A2	R139	C1	R164	*B2	R189	*A3	R218	B3
C23	A1	C175	*B3	C377	*B4			IC310	A5	L101	*A1	L308	*A3	L333	*A4	Q314	A5	R15	*B5	R115	*A2	R140	B2	R165	*A2	R190	B3	R219	*B3
C24	*C5	C176	*B3	C378	*B4			IC311	*A2	L102	A2	L309	*C4	L334	*B4	Q315	B5	R16	A1	R116	B1	R141	B2	R166	*B3	R191	B3	R220	*A3
C25	*A1	C177	*A3	C379	*C4			IC312	*B3	L103	*A1	L310	B4	L335	*A4	Q316	B5	R17	A1	R117	*A2	R142	B2	R167	*B3	R192	B3	R221	*B3
C26	A1	C178	*B3	C380	C4																								
C27	A1	C179	*B3	C381	*B5																								
C28	*A1	C180	*A3	C382	A4																								
C29	*B1	C181	*A3	C383	*B4																								
C30	A1	C182	*B3	C384	*B4																								
C31	B1	C183	*B3	C385	*C4																								
C32	*B5	C184	*B3	C386	*C4																								
C33	*B5	C185	*B3	C387	*A5																								
C34	B5	C186	*A3	C388	A3																								
C35	B5	C187	*A3	C389	*C4																								
C36	*A1	C188	*B3	C390	*B4																								
C37	B1	C189	*B3	C391	B4																								
C38	*C1	C300	*A5	C392	*B4																								
C39	*B1	C301	*A5	C393	*B4																								
C40	*C2	C302	*A5	C394	B4																								
C41	*C2	C303	*A5	C395	B4																								
C100	*A2	C304	*C2	C396	B4																								
C103	*A2	C305	A4	C397	*B4																								
C104	*A2	C306	A5	C398	*B4																								
C105	*A2	C307	*A5	C399	B4																								
C106	*A2	C308	*A4	C400	B4																								
C107	*A2	C309	*A5	C401	A5																								
C108	*C3	C310	*A4	C402	B5																								
C109	A2	C311	*A5	C403	B5																								
C110	A2	C312	*A4	C404	*B5																								
C111	A2	C313	*A4	C405	*B5																								
C112	A2	C314	*A4	C406	*B5																								
C113	A2	C315	*A4	C407	*B5																								
C114	A2	C316	*A4	C408	*B5																								
C115	*C1	C317	*A4	C409	B4																								
C116	*C1	C318	*A4	C410	*B4																								
C117	*C1	C319	*A4	C411	A4																								
C118	A2	C320	*A3	C412	*A4																								
C119	*C2	C321	*A4	C413	*B4																								
C120	*A3	C322	*A4	C414	B4																								
C121	A3	C323	A4	C415	*A4																								
C122	*A1	C324	A4	C416	A4																								
C123	*A1	C325	A3	C417	B4																								
C124	*B2	C326	*A4	C418	A4																								
C125	*B1	C327	*A4	C419	B4																								
C126	*B2	C328	*A4	C420	*B4																								
C127	*B2	C329	A4	C421	A4																								
C128	*B2	C330	A4	C422	*A4	D3	*C5																						
C129	*B2	C331	*A4	C423	*B4																								
C130	*B2	C332	A4	C424	B4	E1	B1																						
C131	*B2	C333	*A4	C425	*A4																								
C132	*B2	C334	*A3	C426	A4	FB1	B1																						
C133	*B2	C335	A3	C427	B4	FB2	B1																						
C134	*B2	C336	*A3	C428	A4	FB100	*C2																						
C135	*B2	C337	*A3			FB101	*C2																						
C136	*B2	C338	*C4	CL1	B1	FB102	*C2																						
C137	*B1	C339	*C4	CL2	B5																								
C138	*B2	C340	*C4	CL3	B5	FL100	B3																						
C139	*B2	C341	C4	CL4	A1	FL101	B3																						
C140	*B2	C342	B4	CL7	C5	FL102	A3																						
C141	*B2	C343	*B4	CL100	B2	FL300	C4																						
C142	*B2	C344	*B4	CL101	*B2																								
C143	*B2	C345	A3	CL102	*B2	HB001	*A4																						
C144	*B2	C346	*A2	CL104	B3																								
C145	B3	C347	A5	CL105	B3	IC1	A1																						
C146	B3	C348	*A5	CL106	A3	IC2	*B5																						
C147	A3	C349	*A4			IC3	*B1																						
C148	B3	C350	A5	CN100	A2	IC4	*C5																						
C149	B3	C351	A4	CN101	C3	IC100	*A2																						
C150	A3	C352	*A2			IC102	*A2																						
C151	B3	C353	*A2	D1	*C1	IC103	C3																						
C152	*B3	C354	*A2	D2	*C5	IC104	A2																						

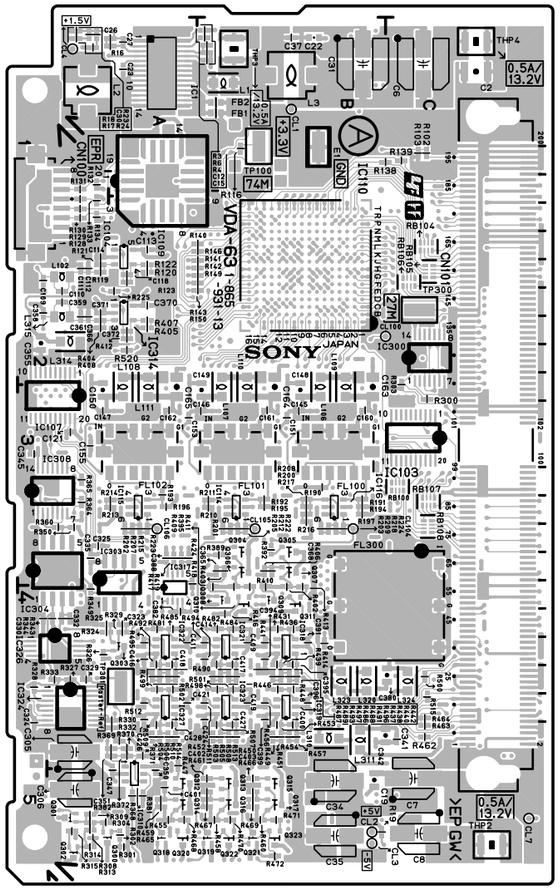

VDA-63 -A SIDE-
SUFFIX: -13

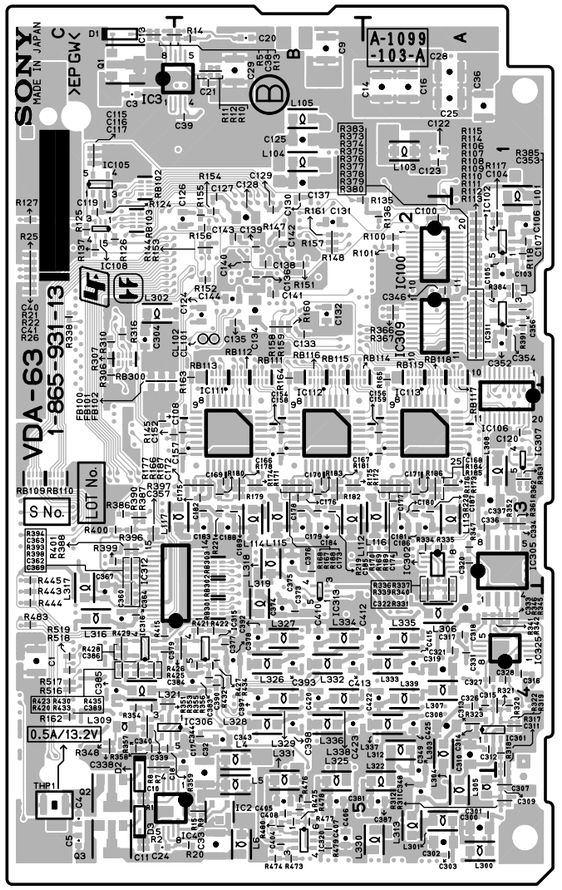

VDA-63 -B SIDE-
SUFFIX: -13

R222	B3	R389	B3	R481	A4																		
R223	A3	R390	*C3	R482	B4																		
R224	B3	R391	*A2	R483	*C4																		
R225	A2	R392	B3	R484	B4																		
R300	C3	R393	*C3	R485	A4																		
R301	A5	R394	*C3	R486	B4																		
R302	A5	R395	B4	R487	A4																		
R303	C2	R396	*C3	R488	B4																		
R304	A5	R397	*C3	R489	A4																		
R306	*C2	R398	*C4	R490	B4																		
R307	*C2	R399	*C3	R491	B4																		
R308	A5	R400	*C3	R492	A4																		
R309	A5	R401	*C3	R493	A4																		
R310	*C2	R402	B4	R494	B4																		
R311	*A5	R403	B3	R495	A4																		
R312	*A5	R404	A2	R496	B4																		
R313	A5	R405	A2	R497	A4																		
R314	A5	R406	B3	R498	B4																		
R315	A5	R407	A2	R499	A4																		
R316	*C2	R408	A2	R500	C4																		
R317	*A4	R409	B4	R501	B4																		
R318	*A4	R410	B4	R502	A4																		
R319	*A4	R411	B4	R503	B4																		
R320	*A4	R412	A2	R504	A4																		
R321	*A4	R413	B4	R505	B4																		
R322	*A4	R414	B4	R506	A4																		
R323	*A4	R415	*C4	R507	B4																		
R324	A4	R416	B4	R508	B4																		
R325	A4	R417	A3	R509	A4																		
R326	A4	R418	A3	R510	A4																		
R327	A4	R419	A3	R511	B4																		
R328	A4	R420	*C4	R512	A4																		
R329	A4	R421	*B4	R513	B4																		
R330	A4	R422	*B4	R514	A4																		
R331	*A4	R423	*C4	R515	C4																		
R332	A4	R424	A3	R516	*C4																		
R333	A4	R425	*B4	R517	*C4																		
R334	*A3	R426	*B4	R518	*C4																		
R335	*A3	R427	*B4	R519	*C4																		
R336	*A3	R428	*C4	R520	A2																		
R337	*A3	R429	*C4																				
R338	*C2	R430	*C4	RB100	C3																		
R339	*A4	R431	B4	RB102	*C1																		
R340	*A4	R432	*B4	RB103	*C2																		
R341	*A4	R433	*C4	RB104	C2																		
R342	*A4	R434	*B4	RB105	C2																		
R343	A4	R435	*C4	RB106	C2																		
R344	A4	R436	B4	RB107	C3																		
R345	*A4	R437	B4	RB108	C3																		
R346	*A4	R438	B4	RB109	*C3																		
R347	*A3	R439	B4	RB110	*C3																		
R348	*C4	R440	B4	RB111	*B2																		
R349	A4	R441	B4	RB112	*B2																		
R350	A3	R442	B4	RB113	*B2																		
R351	*C4	R443	*C4	RB114	*B2																		
R352	*A3	R444	*C4	RB115	*B2																		
R353	*C4	R445	*C3	RB116	*B2																		
R354	*C4	R446	B4	RB117	*A2																		
R355	*C4	R447	A4	RB118	*A2																		
R356	*C4	R448	B4	RB119	*A2																		
R357	*C4	R449	B4	RB300	*C2																		
R358	*C4	R450	B5	RB301	*B4																		
R359	*C4	R451	B4	RB302	*B4																		
R360	A3	R452	B5	RB303	*B3																		
R361	*A3	R453	B4																				
R362	*A3	R454	B4	THP1	*C5																		
R363	*A3	R455	A5	THP2	C5																		
R364	A3	R456	B4	THP3	B1																		
R365	A3	R457	B4	THP4	C1																		
R366	*A2	R458	B5																				
R367	*A2	R459	A5	TP100	B1																		
R368	A5	R460	B5	TP300	C2																		
R369	A4	R461	B5	TP301	A4																		
R370	A4	R462	C4																				
R371	A4	R463	C4	*:B SIDE																			
R372	A4	R464	C4																				
R373	*A2	R465	A5																				
R374	*A2	R466	B5																				
R375	*A2	R467	B5																				
R376	*A2	R468	A5																				
R377	*A2	R469	B5																				
R378	*A2	R470	B5																				
R379	*A2	R471	B5																				
R380	*A2	R472	B5																				
R381	A5	R473	*B5																				
R382	A4	R474	*B5																				
R383	*A2	R475	*B5																				
R384	*A2	R476	*B5																				
R385	*A2	R477	*B5																				
R386	*C3	R478	*B5																				
R387	*C3	R479	*B5																				
R388	*C3	R480	*B5																				

HDC1000 (UCJ)
HDC1000 (J)
HDC1000 (CE)
HDC1100 (J)
HDC1500 (J)
HDC1500 (SY)
HDC1500 (CE)
HDC1550 (UC)
HDC1550 (CE)
HDC1580 (CN)
HDC1600 (J) J, E
9-968-213-03

Sony Corporation

Printed in Japan
2006. 7 08
©2005