
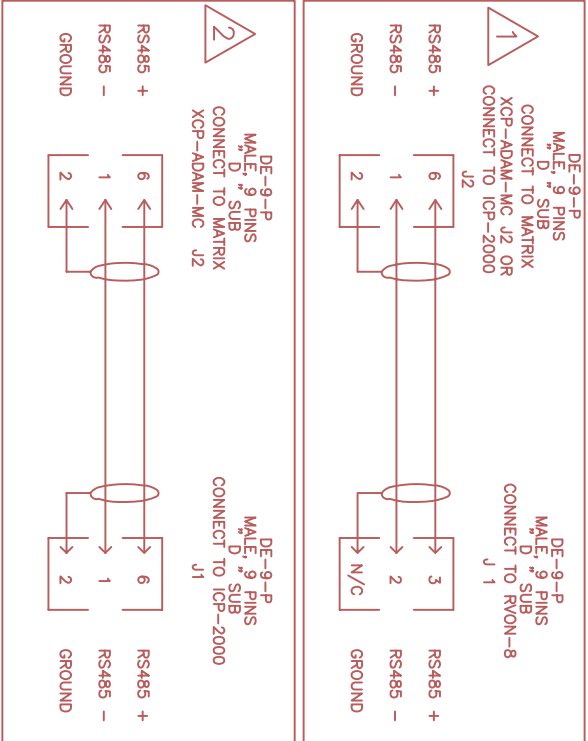
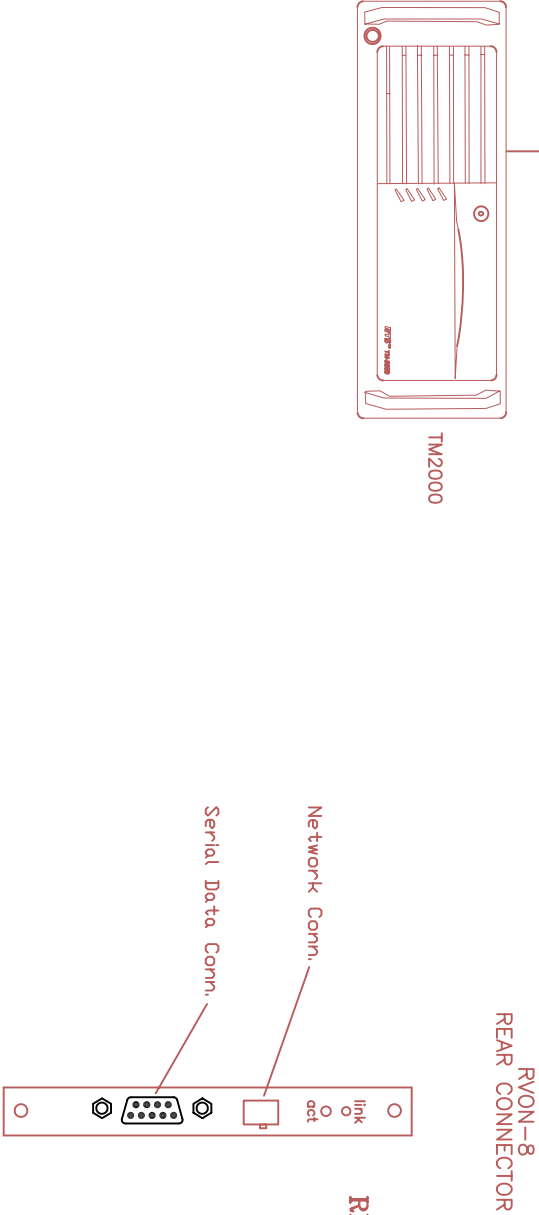


REVISIONS			
ZONE	REV	DESCRIPTION	DATE
			APPROVED

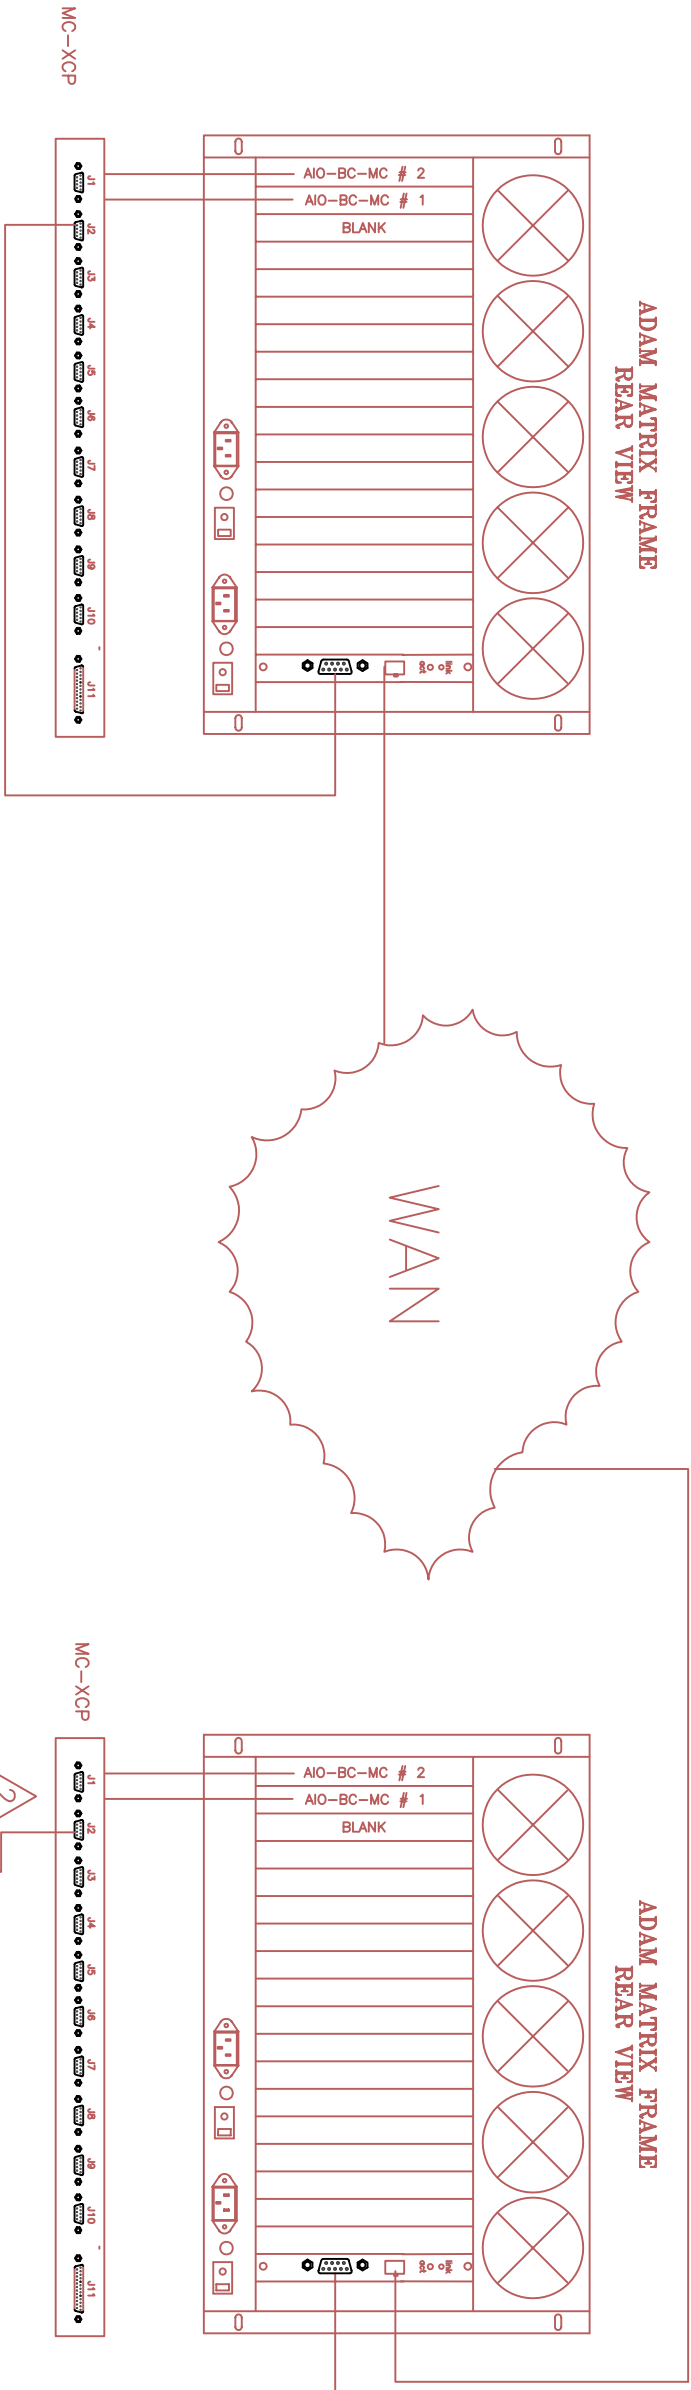

NOTE:1 RVON JUMPER J10,J11,AND J12 SHOULD BE SET TO PINS 1 AND 2 FOR RS-485 DATA

NOTE:2 SET SW1-6 TO OFF FOR SERIAL DATA PASS THROUGH

		UNLESS OTHERWISE SPECIFIED REMOVE ALL BURRS & BREAK SHARP EDGES HOLE TOLERANCES PER 1972 ASME Y14.5 DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS P1/16 .001 .002 .003 .004 .005 .006 .007 .008 .009 .010 .015 .020 .030 .040 .050 .060 .070 .080 .090 .100 .125 .150 .175 .200 .250 .300 .375 .500 .625 .750 .875 1.000 1.250 1.500 1.750 2.000 2.500 3.000 3.500 4.000 4.500 5.000 5.500 6.000 6.500 7.000 7.500 8.000 8.500 9.000 9.500 10.000		CONTRACT NO.		APPROVALS		DATE		RTS SYSTEMS ADAM INTERCOM SYSTEM RVON WIRING DETAIL BURBANK, CALIFORNIA, USA			
		MATERIAL				DRAWN		8 Dec 03					
		FINISH		CHECKED		8 Dec 03							
		NEXT ASSY		USED ON									
		APPLICATION		ADAM301C		ISSUED							