

SONY®

HD COLOR CAMERA

HSC-300

Power HAD FX



MAINTENANCE MANUAL

Volume 2 1st Edition

Serial No. 10001 and Higher: HSC-300 (UC)

Serial No. 30001 and Higher: HSC-300 (J)

Serial No. 40001 and Higher: HSC-300 (CE)

警告

このマニュアルは、サービス専用です。
お客様が、このマニュアルに記載された設置や保守、点検、修理などを行うと感電や火災、
人身事故につながる可能性があります。
危険をさけるため、サービストレーニングを受けた技術者のみご使用ください。

WARNING

This manual is intended for qualified service personnel only.
To reduce the risk of electric shock, fire or injury, do not perform any servicing other than that
contained in the operating instructions unless you are qualified to do so. Refer all servicing to
qualified service personnel.

WARNUNG

Die Anleitung ist nur für qualifiziertes Fachpersonal bestimmt.
Alle Wartungsarbeiten dürfen nur von qualifiziertem Fachpersonal ausgeführt werden. Um die
Gefahr eines elektrischen Schlages, Feuergefahr und Verletzungen zu vermeiden, sind bei
Wartungsarbeiten strikt die Angaben in der Anleitung zu befolgen. Andere als die angegeben
Wartungsarbeiten dürfen nur von Personen ausgeführt werden, die eine spezielle Befähigung
dazu besitzen.

AVERTISSEMENT

Ce manuel est destiné uniquement aux personnes compétentes en charge de l'entretien. Afin
de réduire les risques de décharge électrique, d'incendie ou de blessure n'effectuer que les
réparations indiquées dans le mode d'emploi à moins d'être qualifié pour en effectuer d'autres.
Pour toute réparation faire appel à une personne compétente uniquement.

目次 /Table of Contents

このマニュアルについて

本書の目的.....	3 (J)
関連マニュアル.....	3 (J)
商標について	3 (J)

Manual Structure

Purpose of this manual	3 (E)
Related manuals.....	3 (E)
Trademarks	3 (E)

1. Spare Parts

1-1. 補修部品注意事項.....	1-1
1-1. Notes on Repair Parts	1-1
1-2. Exploded Views	1-2
1-3. Electrical Parts List	1-13
1-4. Optional Fixtures	1-88
1-5. Supplied Accessories.....	1-88

2. Block Diagrams

Overall	2-2
---------------	-----

3. Schematic Diagrams

CD-61	3-2
CN-3069.....	3-22
CN-3070.....	3-22
CN-3071.....	3-22
CN-3072.....	3-22
CN-3073.....	3-22
CN-3074.....	3-22
CN-3075.....	3-22
CN-3076.....	3-23
CN-3077.....	3-23
CN-3078.....	3-23
DPR-298.....	3-24

DR-632.....	3-42
ENC-112.....	3-44
FL-348.....	3-46
LE-355.....	3-46
MB-1125.....	3-47
MS-91	3-49
NR-80.....	3-50
PA-353	3-52
SW-1402	3-53
SW-1403.....	3-53
SW-1404	3-53
SW-1405	3-53
SW-1406/A.....	3-53
SW-1407	3-53
SY-363.....	3-55
TG-265.....	3-72
TX-126.....	3-76
Frame Wiring	3-83

4. Board Layouts

CD-61	4-2
CN-3069.....	4-4
CN-3070.....	4-4
CN-3071.....	4-4
CN-3072.....	4-4
CN-3073.....	4-4
CN-3074.....	4-4
CN-3075.....	4-5
CN-3076.....	4-5
CN-3077.....	4-5
CN-3078.....	4-5
DPR-298.....	4-6
DR-632.....	4-9
ENC-112.....	4-9
FL-348.....	4-10
LE-355.....	4-10
MB-1125	4-11
MS-91	4-12
NR-80.....	4-12

PA-353	4-12
SW-1402	4-13
SW-1403	4-13
SW-1404	4-13
SW-1405	4-13
SW-1406/A.....	4-13
SW-1407	4-13
SY-363.....	4-14
TG-265	4-18
TX-126.....	4-19

このマニュアルについて

本書の目的

本書は、HD COLOR CAMERA HSC-300 のメンテナンスマニュアル Volume 2 です。
本書は、システム／サービスエンジニアの方々にご使用いただくことを想定し、本機の保守に関する情報、部品レベルまでのサービスを前提とした情報（パーツリスト、回路図、マウント図等）を記載しています。

関連マニュアル

本機には、この「メンテナンスマニュアル Volume 2」のほかに、下記のマニュアルが用意されています。

- HSC-300 オペレーションマニュアル（HSC-300 に付属）
HSC-300 を実際に運用および操作するのに必要なマニュアルです。
部品番号：4-137-696-0X（日本語）
部品番号：4-137-697-0X（英語）
- HSC-300 オペレーションマニュアル CD-ROM 版（UC, CE モデル に付属）
HSC-300 を実際に運用および操作するのに必要なマニュアルです。
英語、フランス語、ドイツ語、イタリア語、およびスペイン語のオペレーションマニュアル（PDF）が収録されています。
部品番号：4-137-703-0X
- メンテナンスマニュアル Volume 1（別途用意）
HSC-300 の保守に関する情報と、部品交換および調整などのサービスに関する情報を記載しています。
- “Semiconductor Pin Assignments”CD-ROM 版（別途用意）
この“Semiconductor Pin Assignments”CD-ROM 版は、放送用および業務用の機器に使用されている半導体を検索することができます。
本書には、その機種に使用されている半導体一覧とその ID 番号を記載していますので、この CD-ROM 版と合わせて使用してください。
部品番号：9-968-546-06

商標について

このマニュアルに記載されている商標および登録商標は下記のとおりです。

- FRAM は、米国ラムトロンインターナショナル社の登録商標です。

Manual Structure

Purpose of this manual

This manual is the maintenance manual Volume 2 for HD Color Camera HSC-300. This manual describes the information items that premise the service based on the components parts such as spare parts lists, schematic diagrams and board layouts, assuming use of system and service engineers.

Related manuals

Besides this maintenance manual Volume 2 the following manual is available for this unit.

- **HSC-300 Operation Manual (Supplied with HSC-300)**
This manual is necessary for application and operation of HSC-300.
Part number: 4-137-696-0X (Japanese)
Part number: 4-137-697-0X (English)
- **HSC-300 Operation Manual CD-ROM (Supplied with UC and CE model)**
This manual is necessary for application and operation of HSC-300.
The CD-ROM contains the English, French, German, Italian, and Spanish operation manual (PDF).
Part number: 4-137-703-0X
- **Maintenance Manual Volume 1 (Available on request)**
Describes the maintenance and service information necessary for parts replacement and adjustments of HSC-300.
- **“Semiconductor Pin Assignments” CD-ROM (Available on request)**
This “Semiconductor Pin Assignments” CD-ROM allows you to search for semiconductors used in Broadcast and Professional equipment.
This manual contains a complete list of semiconductors and their ID Nos., and thus should be used together with the CD-ROM.
Part number: 9-968-546-06

Trademarks

Trademarks and registered trademarks used in this manual are follows.

- FRAM is a registered trademark of Ramtron International Corporation.

Section 1

Spare Parts

1-1. Notes on Repair Parts

1. Safety Related Components Warning

WARNING

Components marked △ are critical to safe operation. Therefore, specified parts should be used in the case of replacement.

2. Standardization of Parts

Some repair parts supplied by Sony differ from those used for the unit. These are because of parts commonality and improvement. Parts list has the present standardized repair parts.

3. Stock of Parts

Parts marked with “o” at SP (Supply Code) column of the spare parts list may not be stocked. Therefore, the delivery date will be delayed.

4. Harness

Harnesses with no part number are not registered as spare parts.

1-1. 補修部品注意事項

1. 安全重要部品

△警告

△印のついた部品は安全性を維持するために重要な部品です。したがって、交換する時は必ず指定の部品を使ってください。

2. 部品の共通化

ソニーから供給する補修用部品は、セットに使われているものと異なることがあります。これは部品の共通化、改良等によるものです。部品表には現時点での共通化された補修用部品が記載されています。


3. 部品の在庫

部品表の SP (Supply code) 欄に “o” で示される部品は在庫していないことがあり、納期が長くなる場合があります。

4. ハーネス


部品番号の記載されていないハーネスは、サービス部品として登録されていません。

1-2. Exploded Views

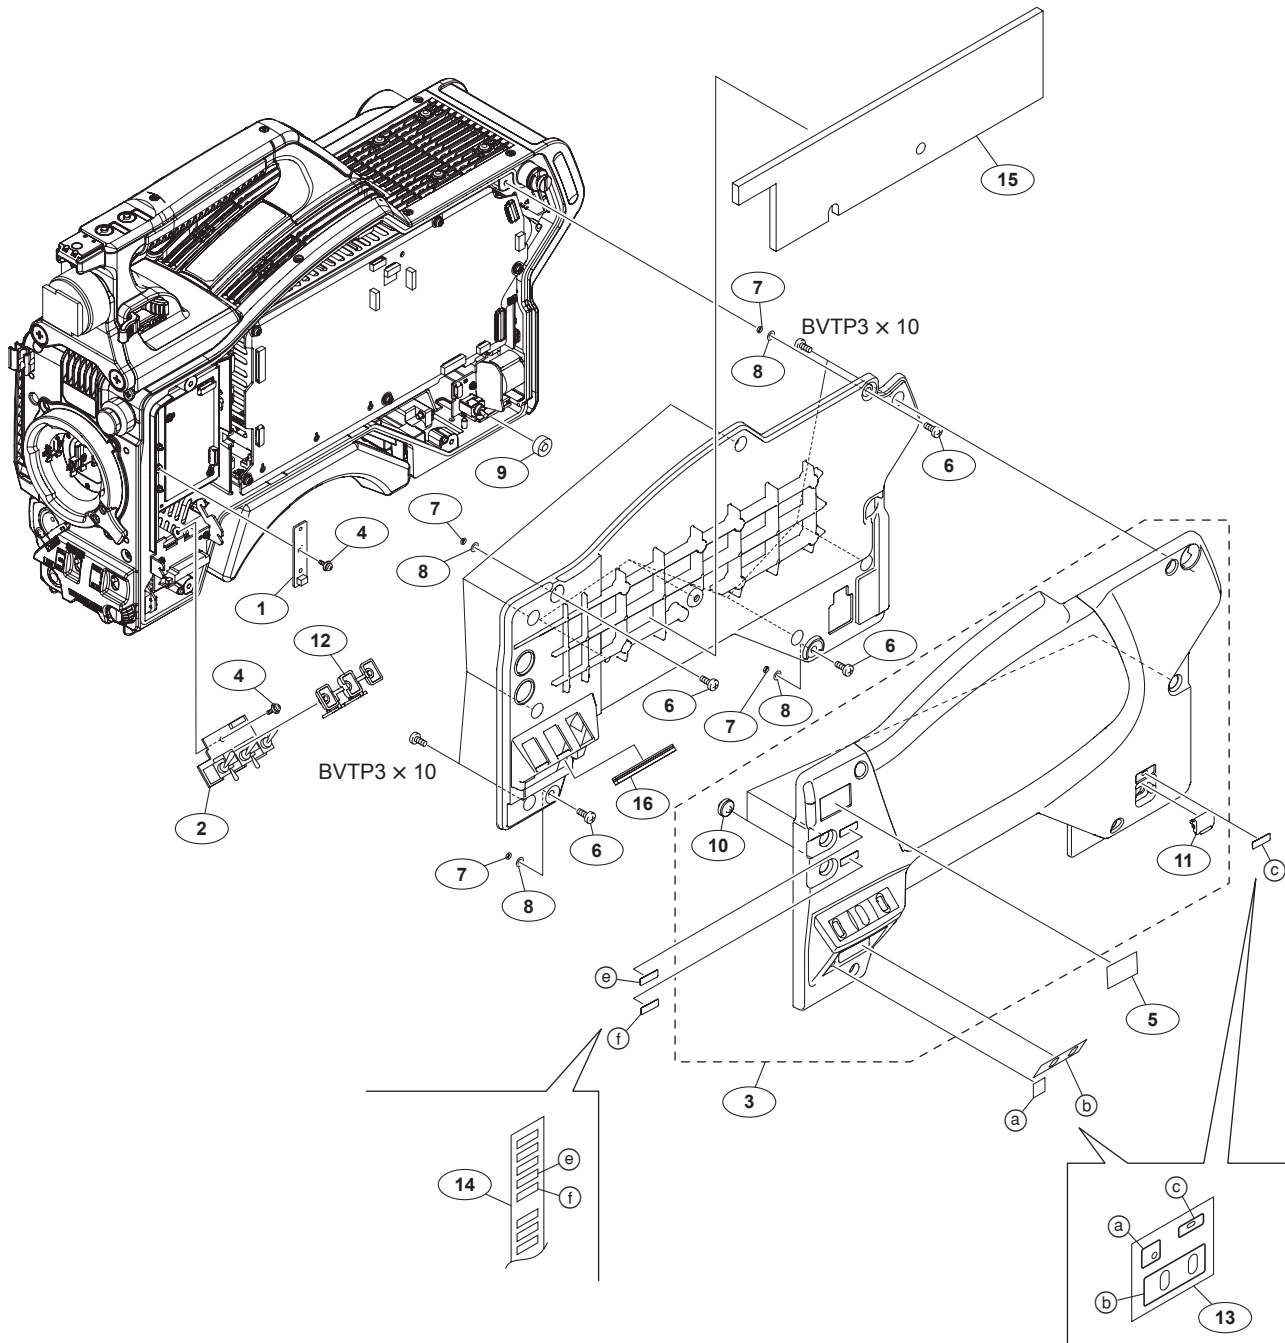

No.	Part No.	SP Description
1	A-1708-081-A	s MOUNTED CIRCUIT BOARD, SW-1402
2	A-1708-082-A	s MOUNTED CIRCUIT BOARD, SW-1404
3	X-2348-332-1	s COVER ASSY, INSIDE (B)
4	2-640-315-02	o SCREW (M2X5), SMALL, +P, SW
5	3-182-055-11	s LABEL (1), FILTER
6	3-603-679-02	s STAINLESS SCREW +B3X10
7	3-672-250-01	s RING (M2.6), O
8	3-701-439-11	s WASHER
9	3-870-137-02	s CAP, DROP PROTECTION
10	4-138-542-01	s COVER, SW


No.	Part No.	SP Description
11	4-138-673-01	s LID, POWER SW
12	4-138-719-01	s RUBBER, DROP PROTECTION
13	4-138-726-01	s SHEET, INSIDE (MULTI)
14	4-138-727-01	s LABEL (HANDLE)
15	4-138-735-01	s CUSHION (LARGE)
16	4-138-737-01	s CUSHION (SMALL)
	7-685-647-91	s SCREW +BVTP 3X10 TYPE2 TT(B)

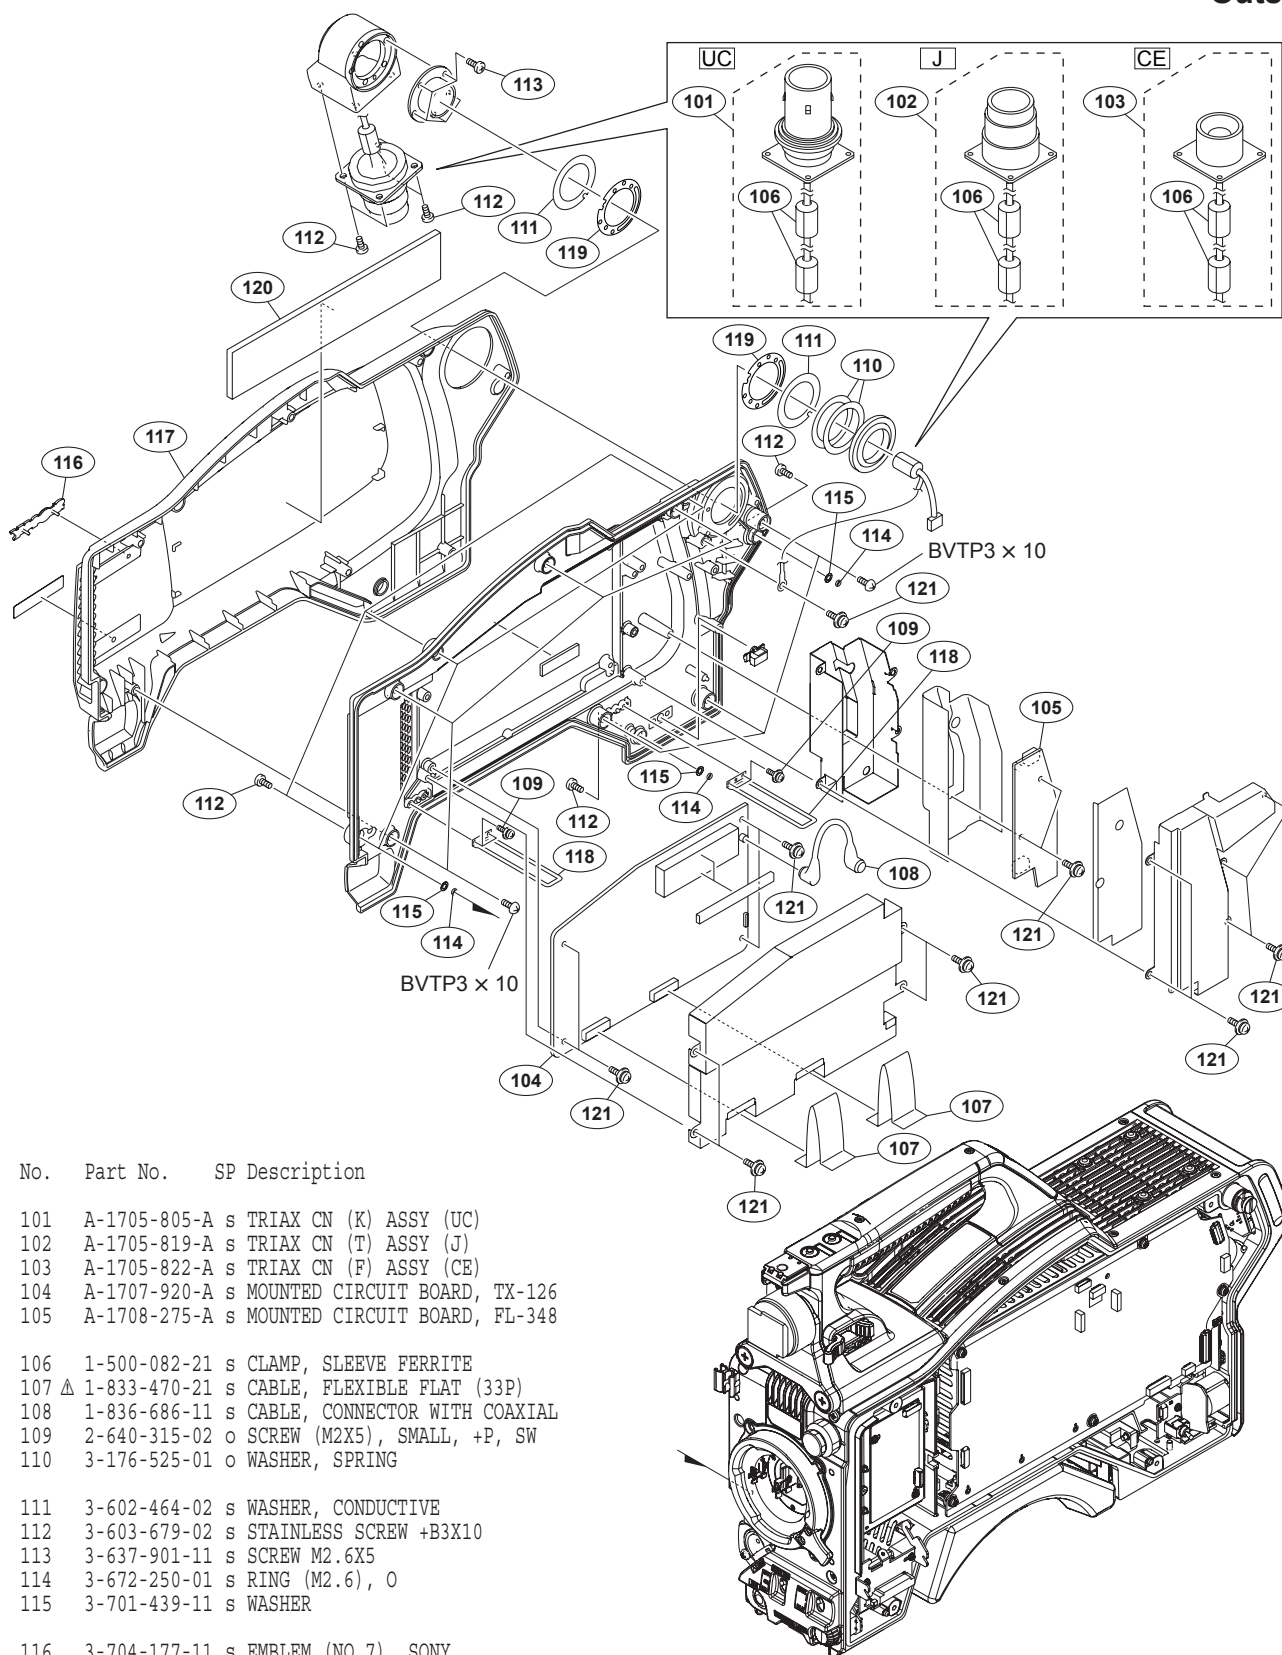

No.	Part No.	SP	Description
101	A-1705-805-A	s	TRIAX CN (K) ASSY (UC)
102	A-1705-819-A	s	TRIAX CN (T) ASSY (J)
103	A-1705-822-A	s	TRIAX CN (F) ASSY (CE)
104	A-1707-920-A	s	MOUNTED CIRCUIT BOARD, TX-126
105	A-1708-275-A	s	MOUNTED CIRCUIT BOARD, FL-348
106	1-500-082-21	s	CLAMP, SLEEVE FERRITE
107	1-833-470-21	s	CABLE, FLEXIBLE FLAT (33P)
108	1-836-686-11	s	CABLE, CONNECTOR WITH COAXIAL
109	2-640-315-02	o	SCREW (M2X5), SMALL, +P, SW
110	3-176-525-01	o	WASHER, SPRING
111	3-602-464-02	s	WASHER, CONDUCTIVE
112	3-603-679-02	s	STAINLESS SCREW +B3X10
113	3-637-901-11	s	SCREW M2.6X5
114	3-672-250-01	s	RING (M2.6), O
115	3-701-439-11	s	WASHER
116	3-704-177-11	s	EMBLEM (NO.7), SONY
117	4-138-545-01	s	COVER, OUTSIDE
118	4-138-680-01	s	SUPPORT, OUTSIDE PANEL
119	4-138-707-01	s	WASHER, TRIAX(2)
120	4-138-738-01	s	CUSHION, OUTSIDE
121	4-382-854-51	s	SCREW (M3X6), P, SW (+)


7-685-647-91 s SCREW +BVTP 3X10 TYPE2 TT(B)

SY-363 Board, Power Supply Assembly

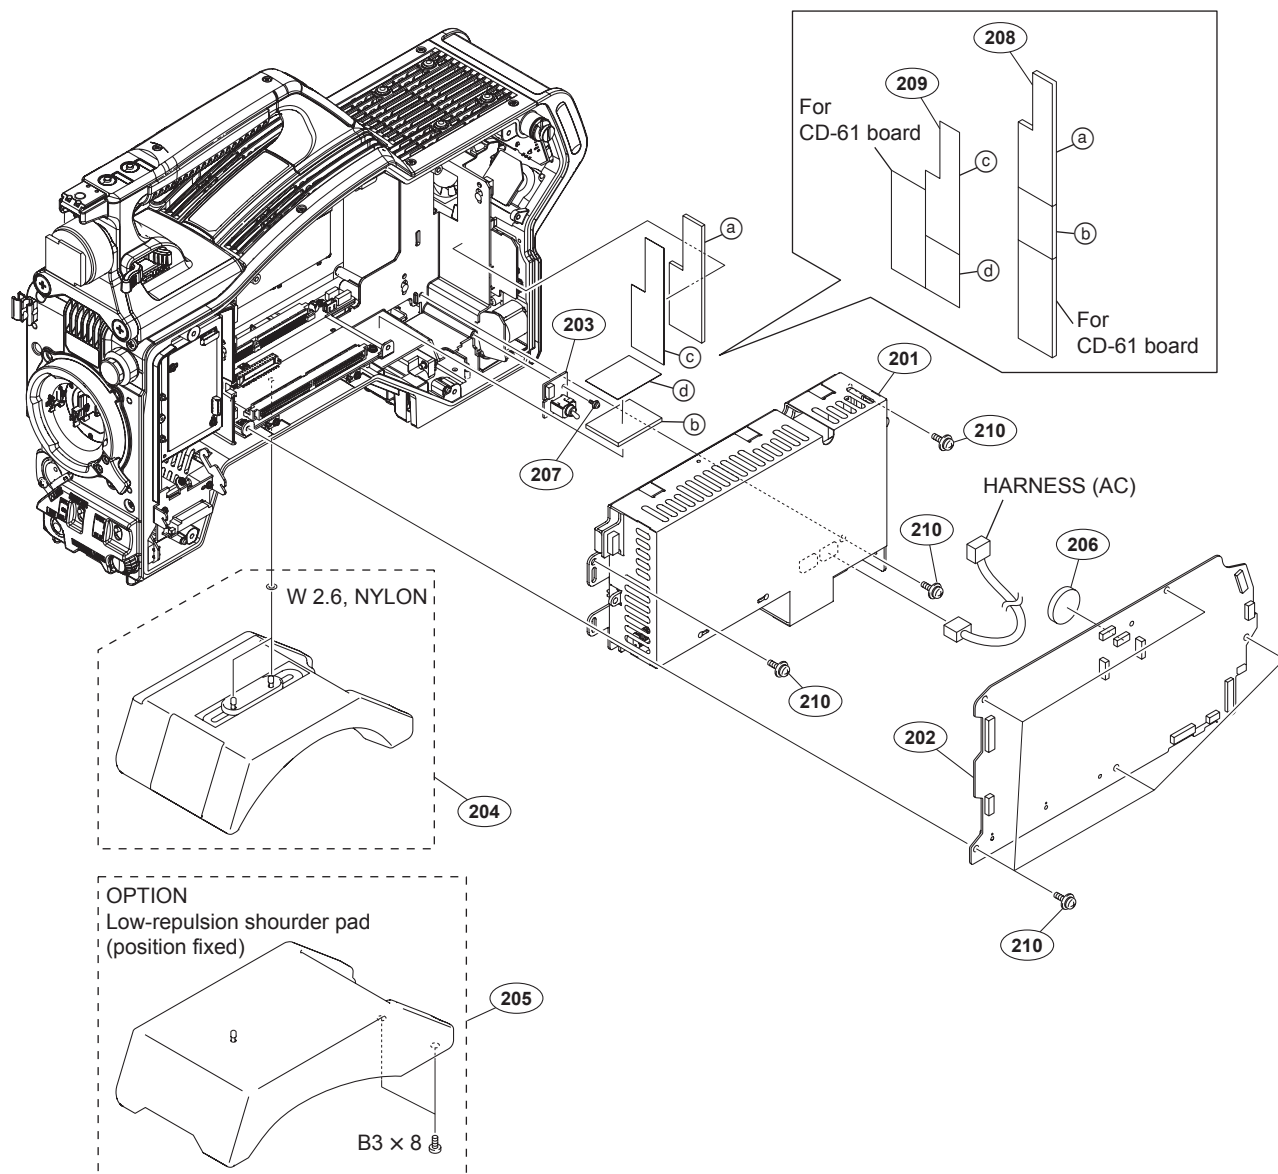

No.	Part No.	SP Description
201	A-1705-807-A	s POWER SUPPLY ASSY
202	A-1707-921-A	s MOUNTED CIRCUIT BOARD, SY-363
203	A-1708-084-A	s MOUNTED CIRCUIT BOARD, SW-1407
204	A-8286-163-B	s PAD ASSY, SHOULDER
205	A-8286-346-A	s PAD ASSY, SHOULDER
206	Δ 1-528-174-11	s BATTERY, LITHIUM (CR2032 TYPE)
207	2-640-315-02	o SCREW (M2X5), SMALL, +P, SW
208	Δ 4-138-724-01	s SHEET, PS CASE THERMAL
209	4-138-743-01	s SHEET, PS CASE SLIDE
210	4-382-854-51	s SCREW (M3X6), P, SW (+)

7-623-923-01 s WASHER 2.6, NYLON
7-682-548-09 s SCREW +B 3X8

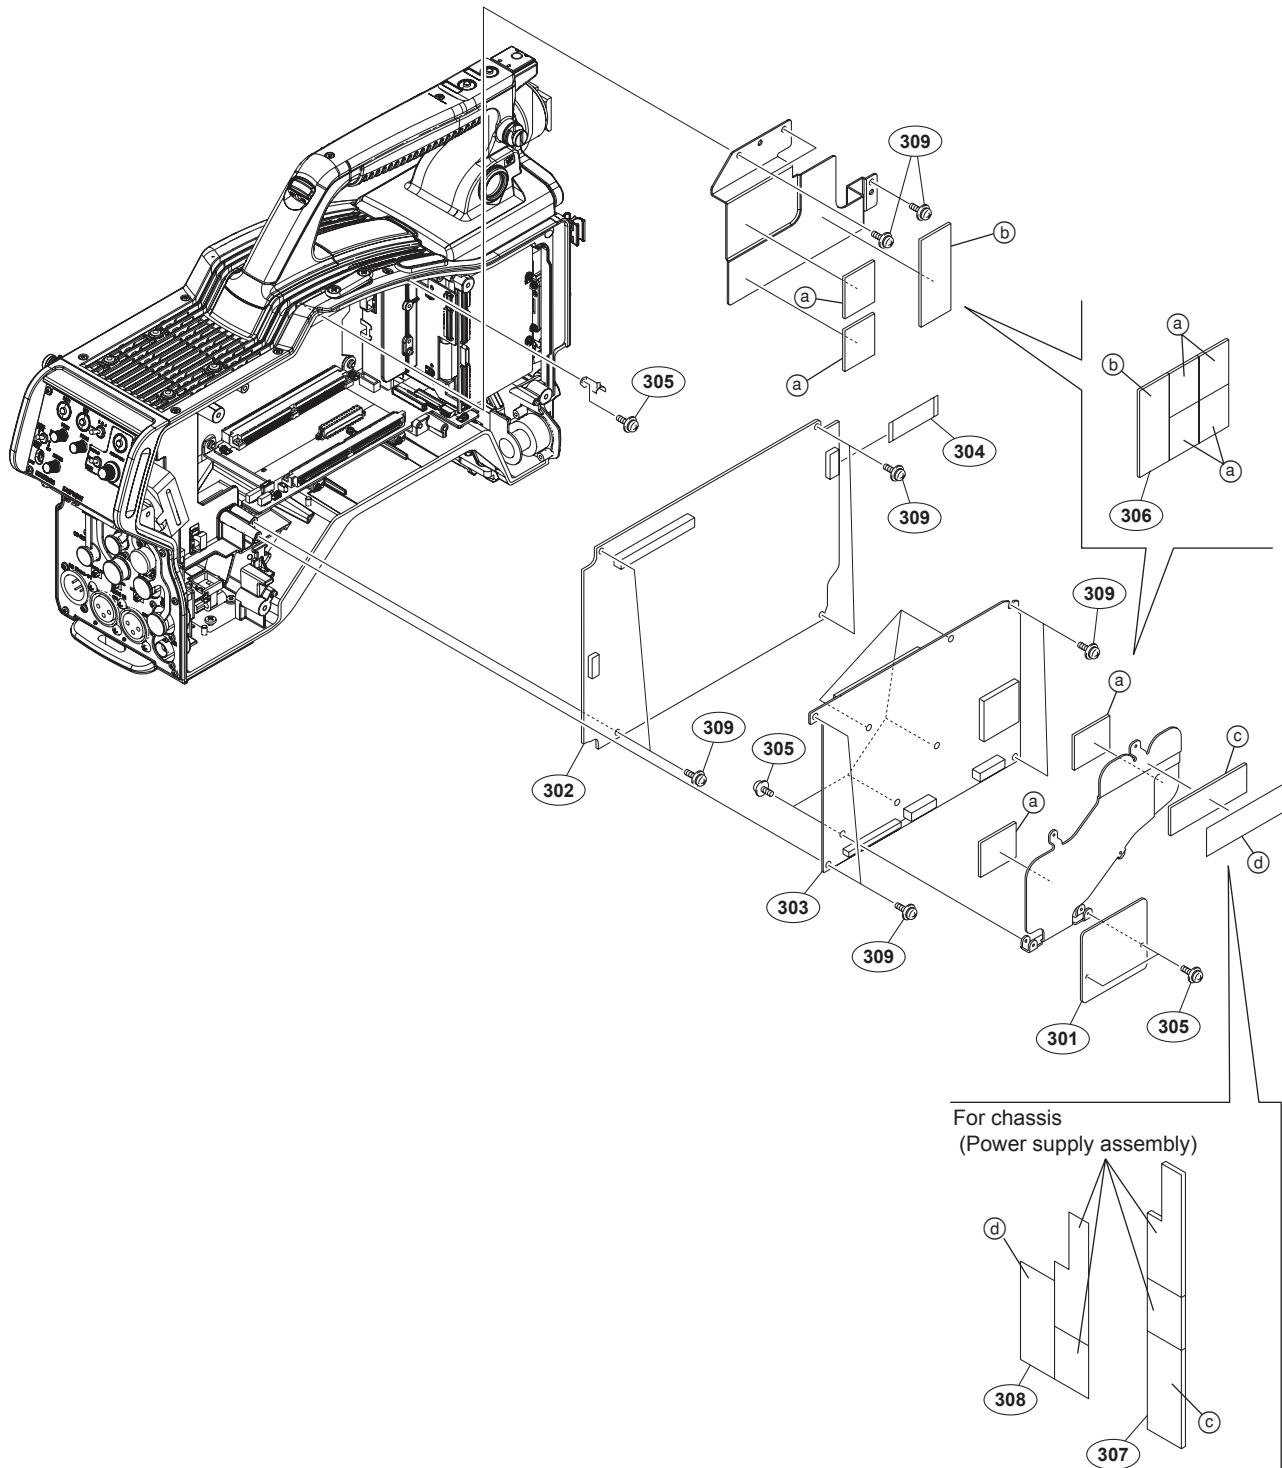


No. Part No. SP Description

301 A-1707-917-A s MOUNTED CIRCUIT BOARD, ENC-112
 302 A-1707-918-A s MOUNTED CIRCUIT BOARD, DPR-298
 303 A-1707-919-A s MOUNTED CIRCUIT BOARD, CD-61
 304 Δ 1-831-104-11 s CABLE, FLEXIBLE FLAT (24 CORE)
 305 2-640-315-02 o SCREW (M2X5), SMALL, +P, SW

306 Δ 4-138-723-01 s SHEET, DPR THERMAL
 307 Δ 4-138-724-01 s SHEET, PS CASE THERMAL
 308 4-138-743-01 s SHEET, PS CASE SLIDE
 309 4-382-854-51 s SCREW (M3X6), P, SW (+)


Front Panel

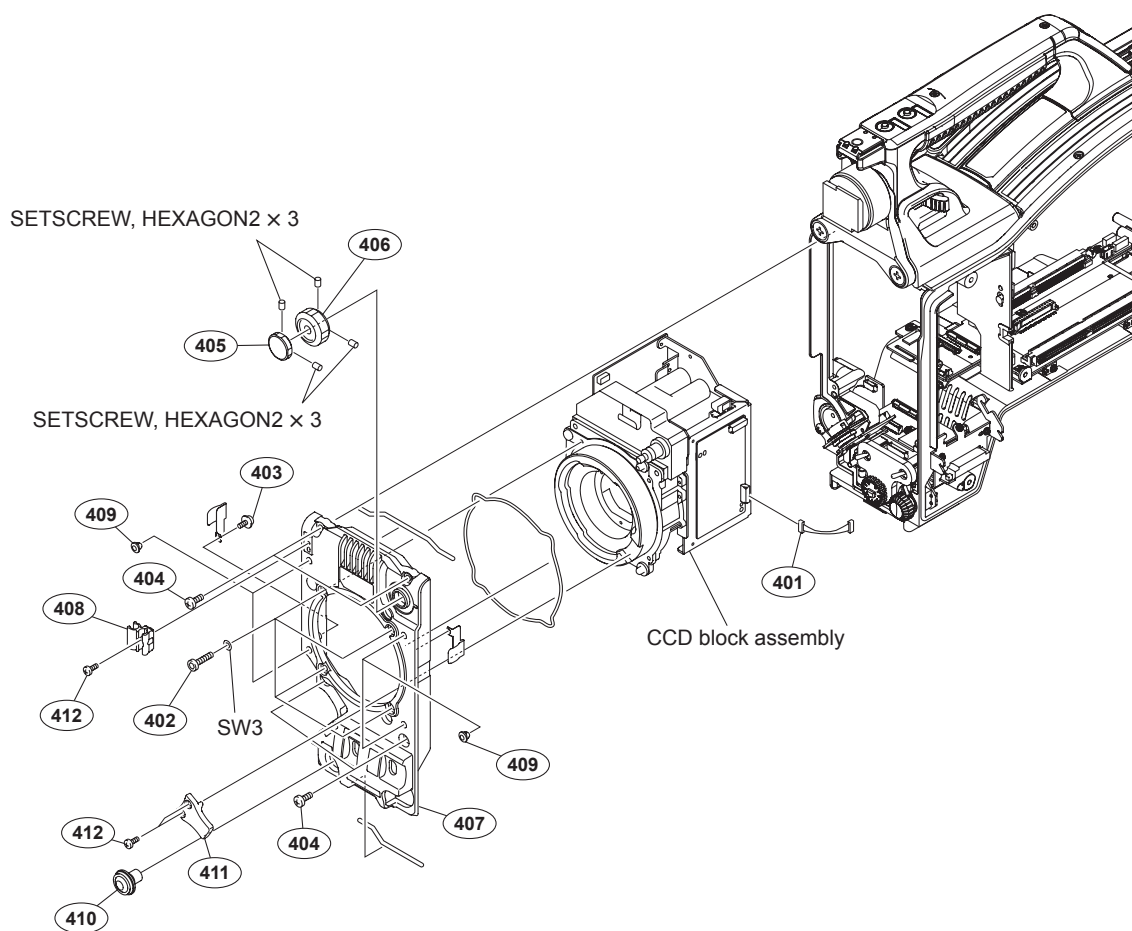

No. Part No. SP Description

401	Δ 1-966-588-11	s HARNESS, SUB (FILTER-DISC)
402	2-623-773-11	s BOLT (M3X8), STAINLESS
403	2-640-315-02	o SCREW (M2X5), SMALL, +P, SW
404	3-603-679-02	s STAINLESS SCREW +B3X10
405	3-679-670-03	s KNOB, FILTER (ND)
406	3-679-671-11	s KNOB, FILTER (CC)
407	Δ 4-138-534-01	s PANEL, FRONT (2S)
408	4-138-678-01	s CLAMP, CABLE
409	4-138-679-01	s SCREW, BLIND
410	4-138-681-01	s COVER, SS SW
411	4-138-685-01	s LEVER, MOUNT
412	4-654-273-02	s ACE (M2), LOCK


7-621-732-09 s SET-SCT HEX. 2X3 WP
 7-623-208-22 s SW 3, TYPE 2

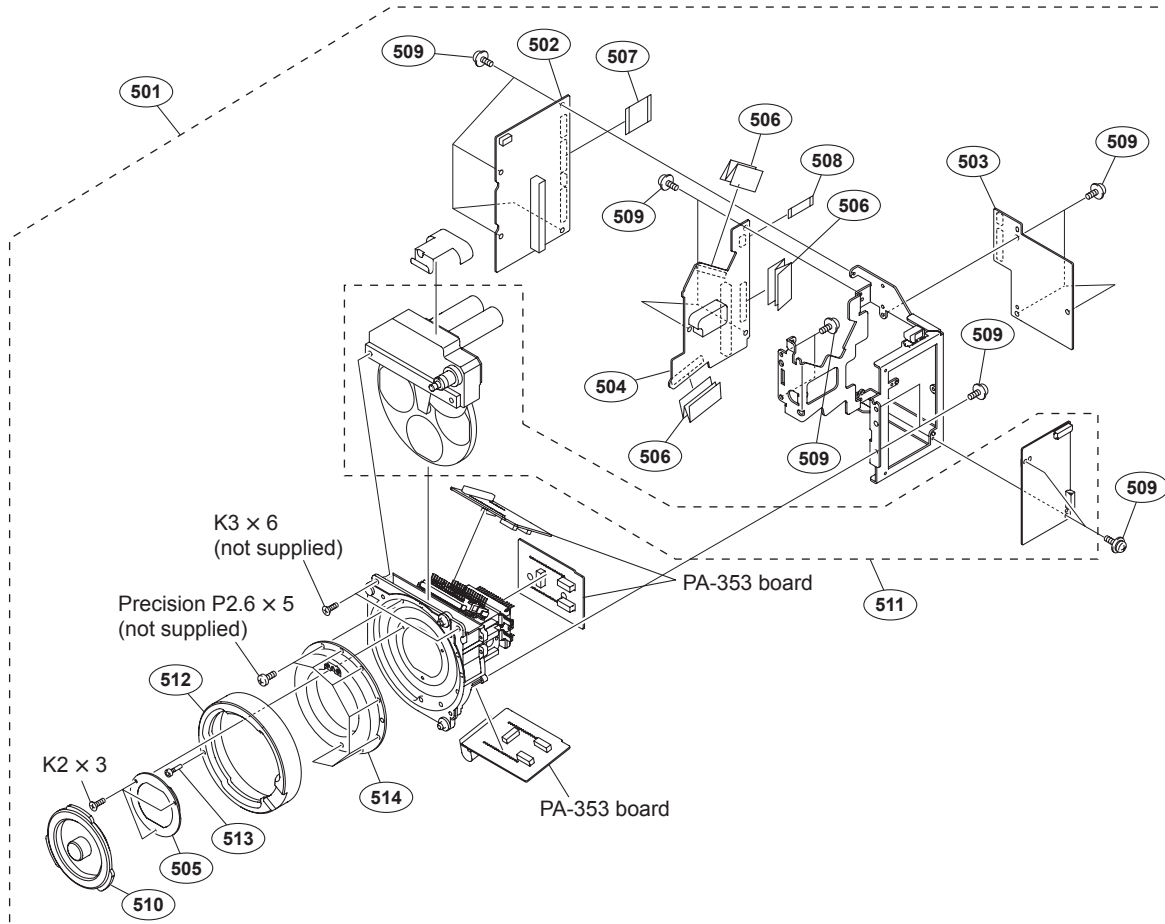

No.	Part No.	SP	Description
501	A-1706-078-A	s	CCD BLOCK ASSY (RP)
502	A-1707-916-A	s	MOUNTED CIRCUIT BOARD, TG-265
503	A-1708-086-A	s	MOUNTED CIRCUIT BOARD, NR-80
504	A-1708-273-A	s	MOUNTED CIRCUIT BOARD, DR-632
505	1-788-764-21	s	FILTER UNIT, OPTICAL
506	1-832-133-11	s	CABLE, FLEXIBLE FLAT (50 CORE)
507	1-836-688-11	s	CABLE, FLEXIBLE FLAT (36 CORE)
508	1-836-689-11	s	CABLE, FLEXIBLE FLAT (10 CORE)
509	2-640-315-02	o	SCREW (M2X5), SMALL, +P, SW
510	3-699-048-01	s	CAP, MOUNT
511	9-885-131-66	s	FD UNIT/CPJ-MS-42
512	9-885-131-67	s	BAYONET RING/CPJ-MS-42
513	9-885-131-68	s	DRIVING PIN/CPJ-MS-42
514	9-885-131-69	s	SLEEP BACK MOUNT/CPJ-MS-42

7-627-452-18 s SCREW,PRECISION +K 2X3

Front Boards, MB-1125 Board

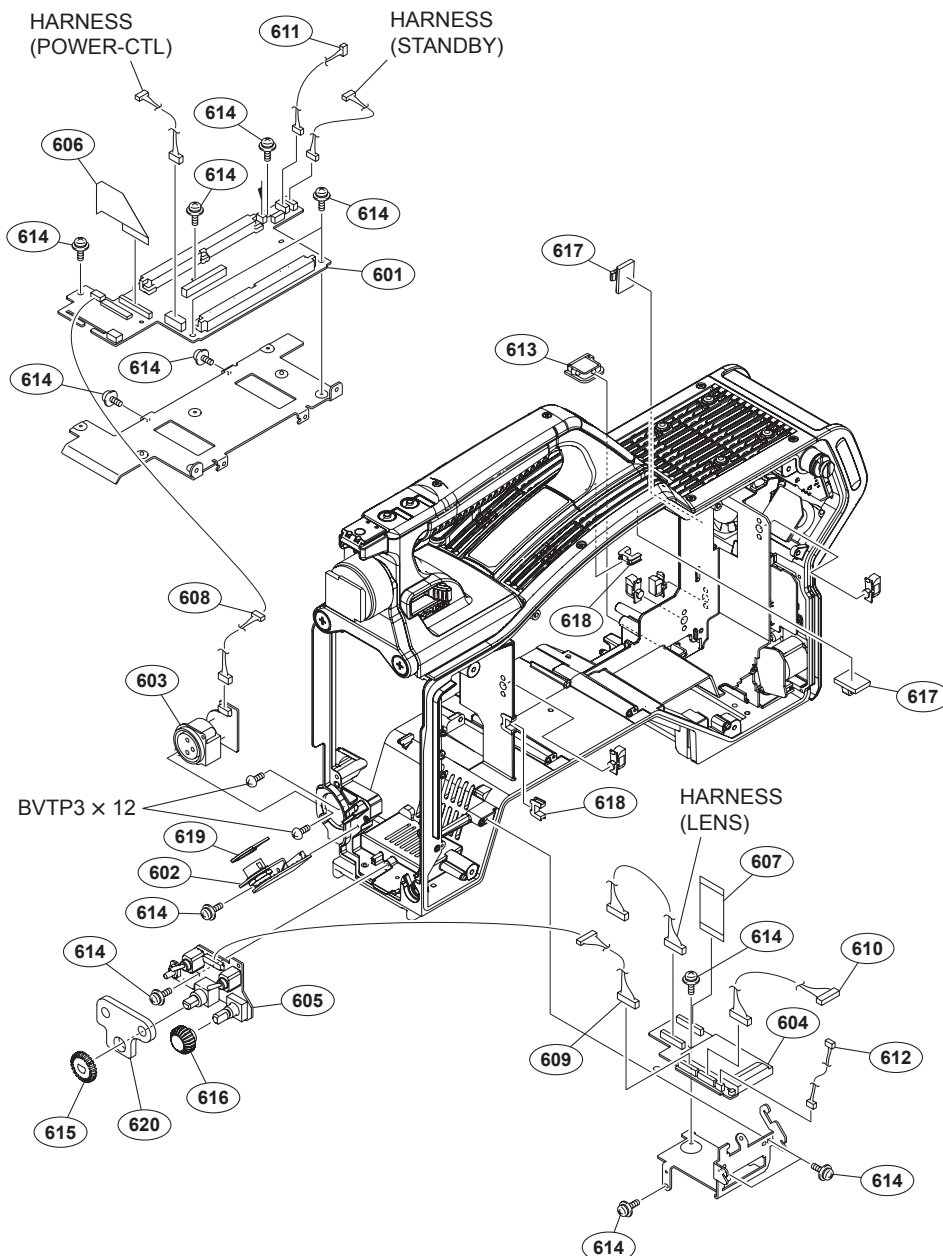

No. Part No. SP Description

601 A-1708-075-A s MOUNTED CIRCUIT BOARD, MB-1125
 602 A-1708-078-A s MOUNTED CIRCUIT BOARD, CN-3070
 603 A-1708-079-A s MOUNTED CIRCUIT BOARD, CN-3071
 604 A-1708-080-A s MOUNTED CIRCUIT BOARD, MS-91
 605 A-1708-083-A s MOUNTED CIRCUIT BOARD, SW-1405


606 Δ 1-831-081-11 s CABLE, FLEXIBLE FLAT (45 CORE)
 607 Δ 1-831-156-11 s CABLE, FLEXIBLE FLAT (36 CORE)
 608 Δ 1-966-584-11 s HARNESS, SUB (FRONT-MIC)
 609 Δ 1-966-586-11 s HARNESS, SUB (FRONT)
 610 Δ 1-966-587-11 s HARNESS, SUB (INSIDE)

611 Δ 1-966-592-11 s HARNESS, SUB (POWER-SW)
 612 Δ 1-966-597-11 s HARNESS, SUB (ASSIGNABLE)
 613 2-433-598-01 s HOLDER (LT-11U), WIRE
 614 2-640-315-02 o SCREW (M2X5), SMALL, +P, SW
 615 3-679-679-04 s KNOB, VR (AUDIO)

No. Part No. SP Description


616 3-692-111-02 s KNOB, RE
 617 4-137-924-01 s CLAMP (PJ-15B), CABLE
 618 4-137-926-01 s SADDLE (LES-0505), EDGE
 619 4-138-732-01 s CUSHION, LENS CN
 620 4-138-733-01 s CUSHION, FRONT SW

7-685-648-99 s SCREW +BVTP 3X12 TYPE2 TT(B)

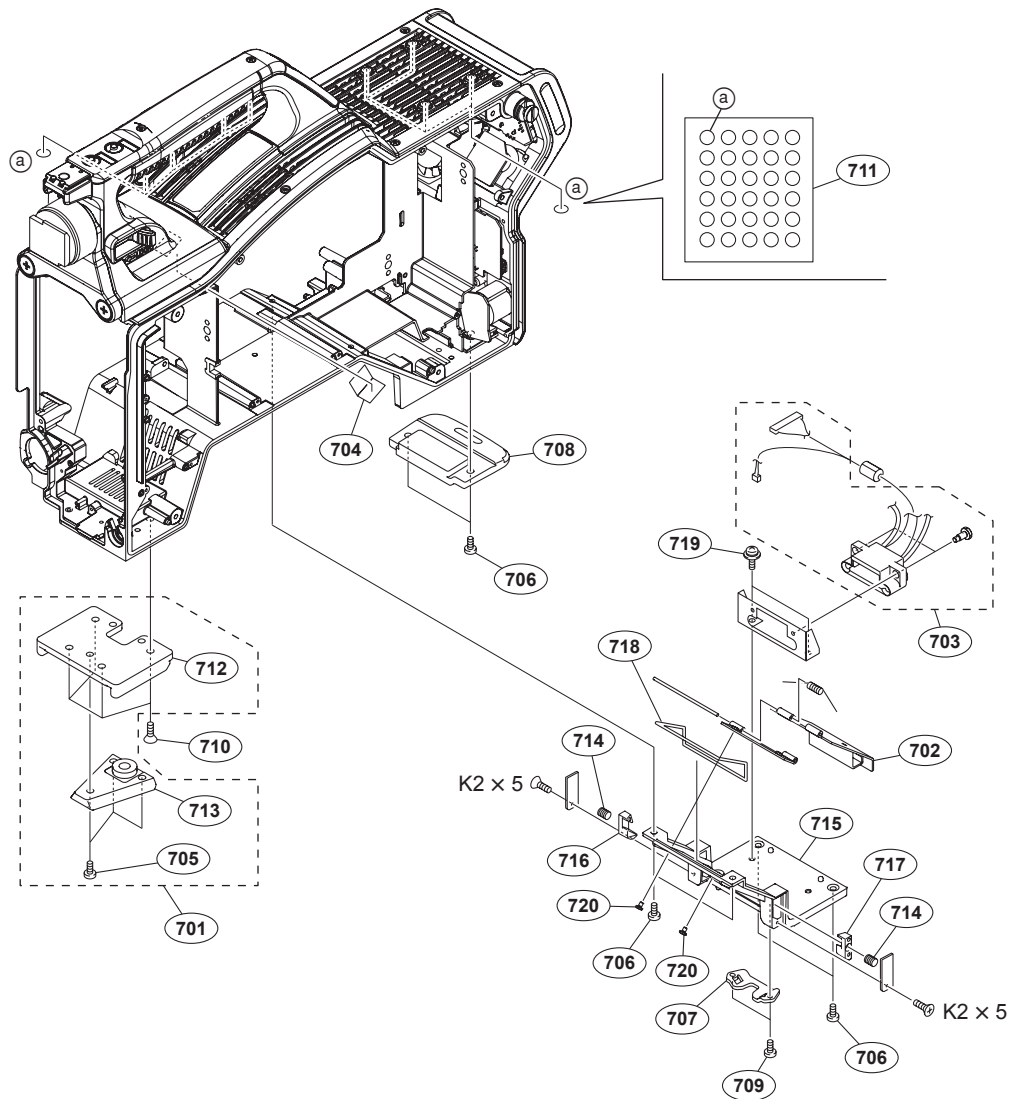

No.	Part No.	SP	Description
701	A-8279-993-C	s	SHOE(D) ASSY,V
702	X-3704-670-1	s	HOT DOOR
703	△ 1-966-598-11	s	HARNES, SUB (BUILDUP)
704	2-678-968-01	o	TAPE AS (1215)
705	3-271-563-01	s	SCREW +P M4X6
706	3-603-679-02	s	STAINLESS SCREW +B3X10
707	3-626-781-03	s	STOPPER
708	3-626-960-02	s	GUARD, TAIL
709	3-637-901-11	s	SCREW M2.6X5
710	3-729-072-02	s	SCREW, +K (4X8)
711	3-796-946-02	s	TAPE (A)
712	3-854-769-02	s	SHOE (D), CAMERA
713	3-854-770-02	s	WEDGE (D), MOUNTING
714	3-872-522-02	s	SPRING, COMPRESSION (STOPPER)
715	△ 3-872-541-01	s	BASE, HOT SHOE
716	3-872-550-02	s	STOPPER (R), HOT DOOR
717	3-872-551-02	s	STOPPER (L), HOT DOOR
718	3-872-573-02	s	WATER PROTECT (HOT DOOR)
719	4-382-854-51	s	SCREW (M3X6), P, SW (+)
720	4-654-273-02	s	ACE (M2), LOCK

7-621-555-30 S SCREW +K2X5

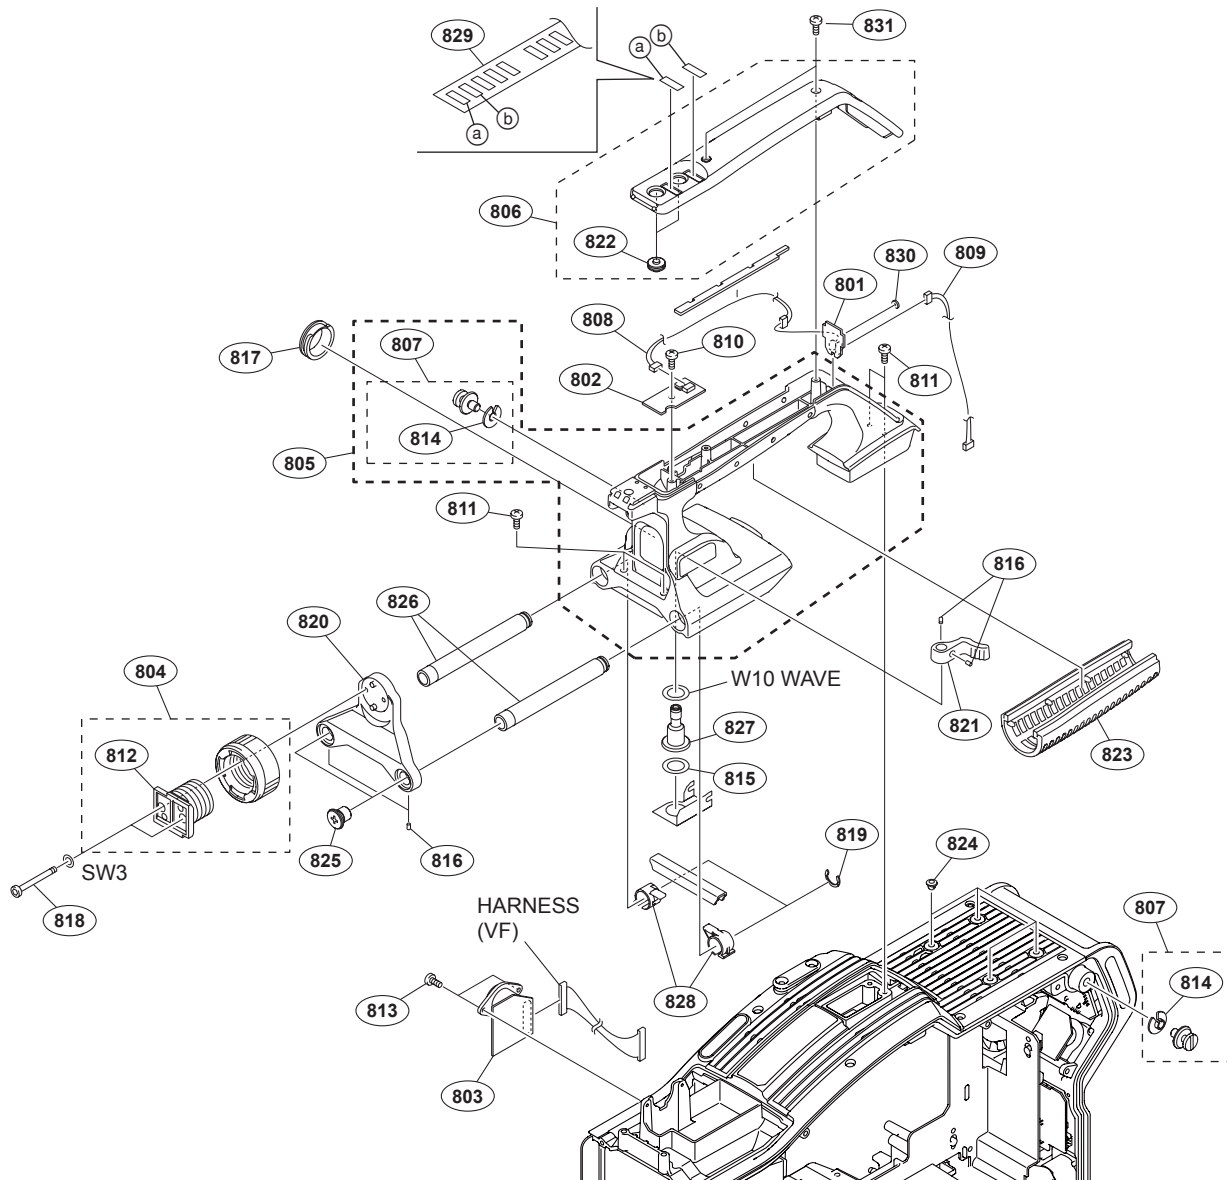

No. Part No. SP Description

801 A-1708-072-A s MOUNTED CIRCUIT BOARD, LE-355
 802 A-1708-073-A s MOUNTED CIRCUIT BOARD, SW-1403
 803 A-1708-077-A s MOUNTED CIRCUIT BOARD, CN-3069
 804 A-8278-412-J s SHOE ASSY,VF
 805 X-2348-333-1 s SUB ASSY, HANDLE

806 X-2348-338-1 s COVER ASSY, HANDLE
 807 X-3710-037-1 s SUSPENSION ASSY (C)
 808 Δ 1-966-589-11 s HARNESS, SUB (HANDLE-SW)
 809 Δ 1-966-590-11 s HARNESS, SUB (HANDLE-TALLY)
 810 2-640-315-02 o SCREW (M2X5), SMALL, +P, SW

811 3-603-679-02 s STAINLESS SCREW +B3X10
 812 3-627-853-07 s SHOE,SLIDE
 813 3-637-901-11 s SCREW M2.6X5
 814 3-654-615-02 s COLLAR, SUSPENSION
 815 3-701-447-11 s WASHER, 10

816 3-701-505-01 s SET SCREW, DOUBLE POINT 3X3
 817 3-710-024-02 s PACKING, VF
 818 3-711-765-01 s BOLT (M3), HEXAGON SOCKET
 819 4-138-139-01 s STOP RING 9, TYPE-CE
 820 4-138-535-01 s PLATE, VF SHOE


No. Part No. SP Description

821 4-138-536-01 s LEVER, LOCK
 822 4-138-542-01 s COVER, SW
 823 4-138-676-01 s GRIP
 824 4-138-679-01 s SCREW, BLIND
 825 4-138-691-01 s SCREW, PIPE CAP

826 4-138-692-01 s PIPE, VF SLIDE
 827 4-138-693-01 s SCREW, VF SLIDE LOCK
 828 4-138-694-01 s LOCK, VF SLIDE
 829 4-138-727-01 s LABEL(HANDLE)
 830 4-138-742-01 s CUSHION, HANDLE TALLY

831 4-654-273-02 s ACE (M2), LOCK


7-623-208-22 s SW 3,TYPE 2
 7-623-710-57 s WASHER 10, WAVE TYPE

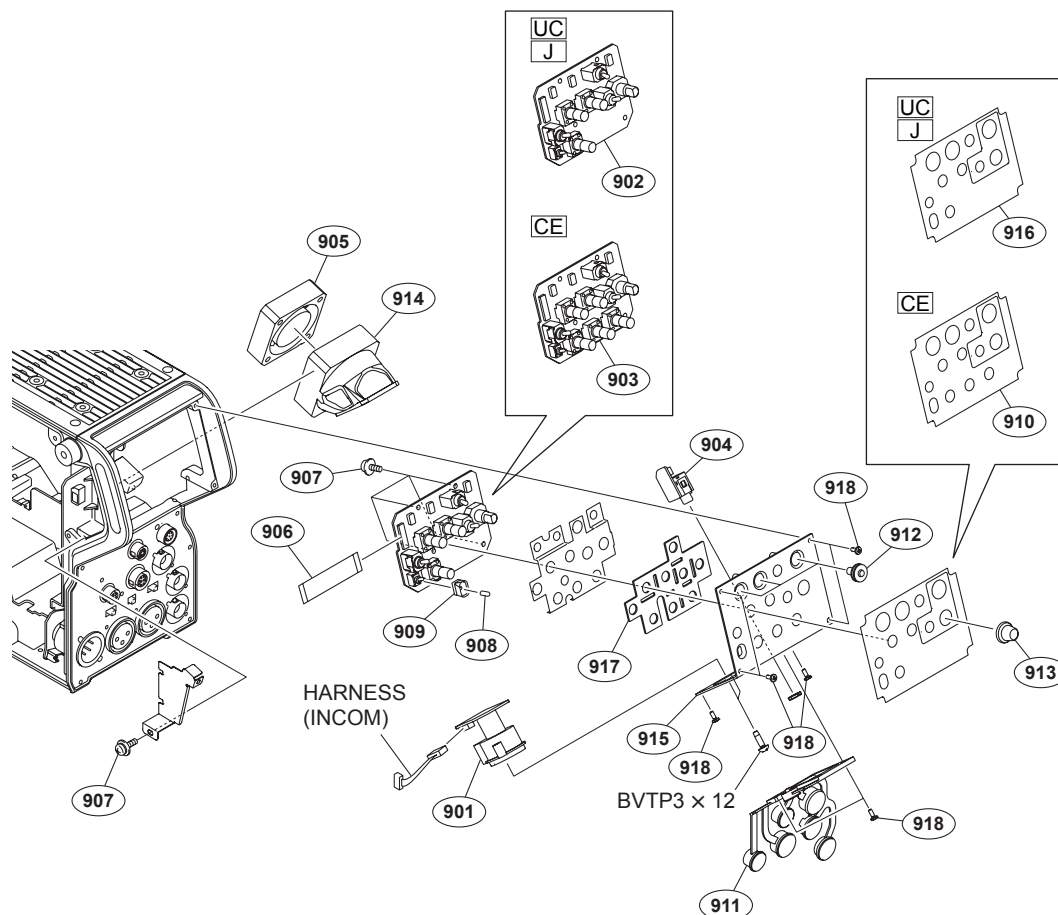

No.	Part No.	SP Description
901	A-1708-087-A	s MOUNTED CIRCUIT BOARD, CN-3072
902	A-1708-088-A	s MOUNTED CIRCUIT BOARD, SW-1406 (UC, J)
903	A-1708-274-A	s MOUNTED CIRCUIT BOARD, SW-1406 (CE)
904	A-1708-266-A	s MOUNTED CIRCUIT BOARD, CN-3073
905	Δ 1-787-847-11	s FAN, DC (40SQUARE)
906	Δ 1-831-104-11	s CABLE, FLEXIBLE FLAT (24 CORE)
907	2-640-315-02	o SCREW (M2X5), SMALL, +P, SW
908	3-869-842-01	s CAP,SW
909	3-903-660-01	s DROP PROTECTION,TOGGLE
910	4-138-449-01	s SHEET,INCOM(P) (CE)
911	4-138-674-01	s CAP, CONNECTOR (1)
912	4-138-682-01	s SW COVER
913	4-138-683-01	s KNOB, ENCODER
914	4-138-686-01	s DUCT, FAN
915	Δ 4-138-699-01	s PANEL, INCOM
916	4-138-725-01	s SHEET, INCOM(N) (UC, J)
917	4-138-736-01	s SHEET, WATER PROOF INCOM
918	4-654-273-02	s ACE (M2), LOCK

7-685-648-99 S SCREW +BVTP 3X12 TYPE2 TT(B)

Connector Panel

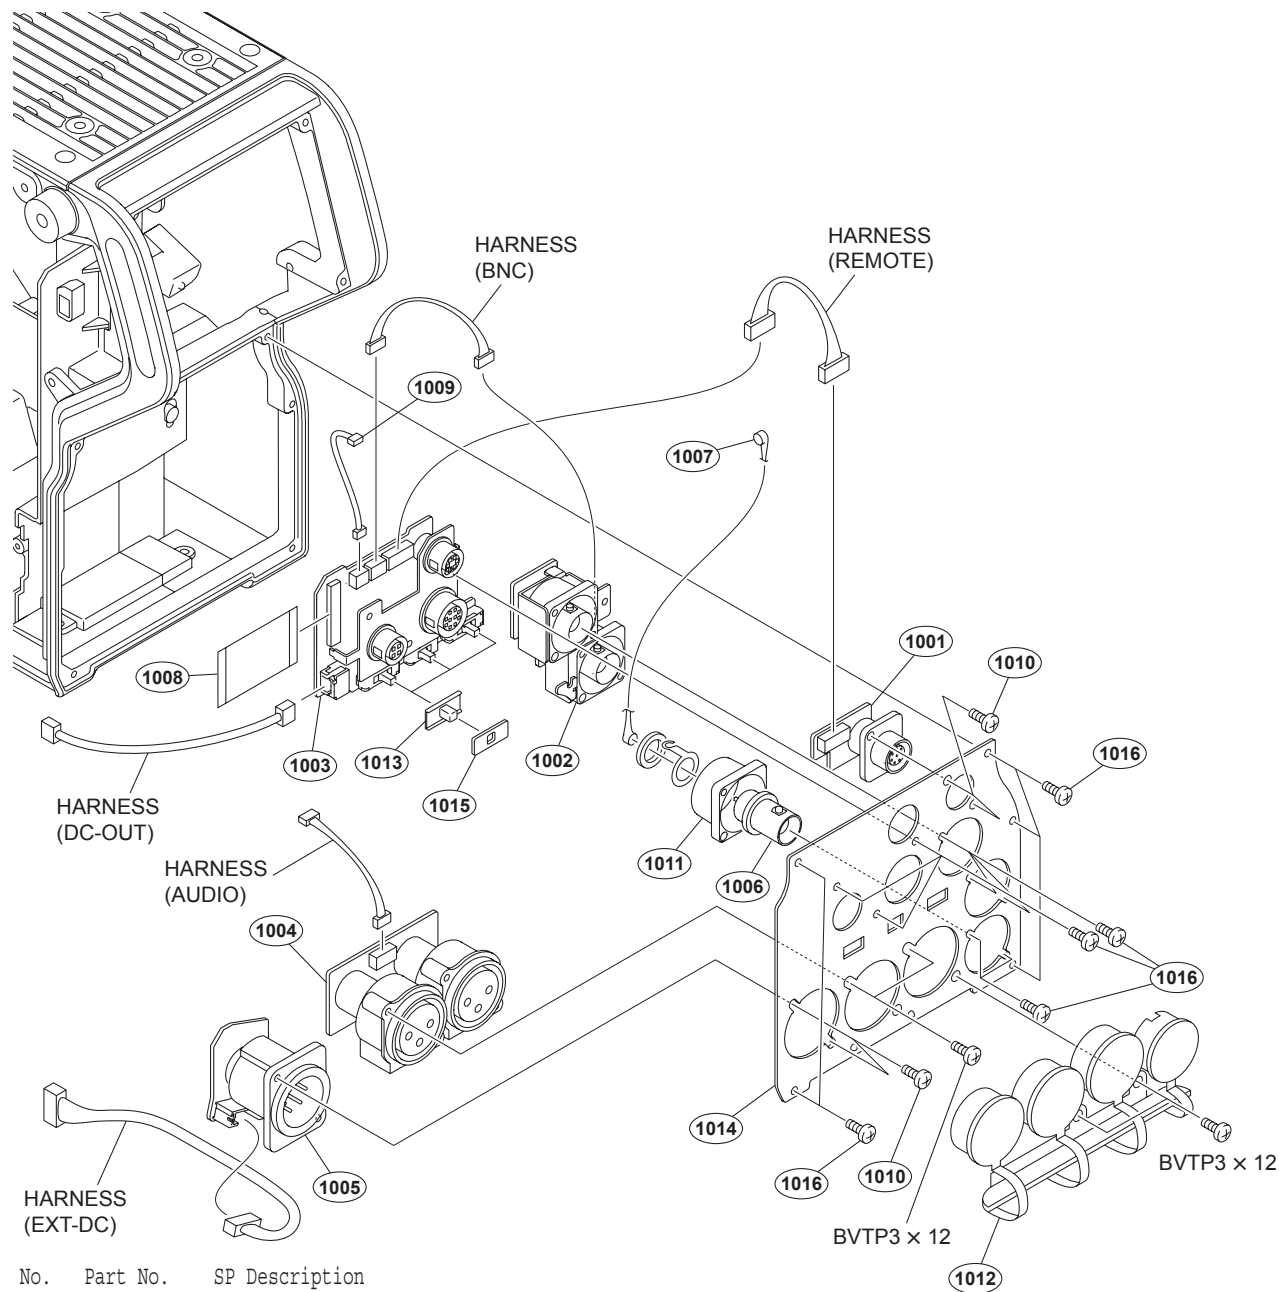

No.	Part No.	SP	Description
1001	A-1708-267-A	s	MOUNTED CIRCUIT BOARD, CN-3074
1002	A-1708-268-A	s	MOUNTED CIRCUIT BOARD, CN-3075
1003	A-1708-269-A	s	MOUNTED CIRCUIT BOARD, CN-3076
1004	A-1708-270-A	s	MOUNTED CIRCUIT BOARD, CN-3077
1005	A-1708-271-A	s	MOUNTED CIRCUIT BOARD, CN-3078
1006	1-784-240-11	s	CONVERTER, COAXIAL CONNECTOR
1007	1-829-055-11	s	CABLE ASSEMBLY, COAXIAL
1008	Δ 1-835-324-11	s	CABLE, FLEXIBLE FLAT (36 CORE)
1009	Δ 1-966-579-11	s	HARNESS, SUB (EARPHONE)
1010	3-637-901-11	s	SCREW M2.6X5
1011	3-863-319-01	s	BRACKET BNC
1012	4-138-675-01	s	CAP, CONNECTOR (2)
1013	4-138-687-01	s	COVER, SLIDE SWITCH
1014	Δ 4-138-698-01	s	PANEL, MIC
1015	4-138-731-01	s	SHEET, WATER PROOF SW
1016	4-654-273-02	s	ACE (M2), LOCK

7-685-648-99 s SCREW +BVTP 3X12 TYPE2 TT(B)

1-3. Electrical Parts List

CD-61 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1707-919-A	s MOUNTED CIRCUIT BOARD, CD-61
C1	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C2	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C3	1-112-815-91	s CAP, CERAMIC 10MF C (1608)
C4	1-112-815-91	s CAP, CERAMIC 10MF C (1608)
C5	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C6	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C7	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C8	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C9	1-112-015-91	s CAP, CHIP CERAMIC 47MF B 3225
C10	1-112-815-91	s CAP, CERAMIC 10MF C (1608)
C11	1-112-015-91	s CAP, CHIP CERAMIC 47MF B 3225
C12	1-112-692-81	s CAP,CHIP CERAMIC1000PF CH 1005
C13	1-112-692-81	s CAP,CHIP CERAMIC1000PF CH 1005
C14	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C15	1-112-815-91	s CAP, CERAMIC 10MF C (1608)
C16	1-112-815-91	s CAP, CERAMIC 10MF C (1608)
C17	1-112-815-91	s CAP, CERAMIC 10MF C (1608)
C18	1-112-815-91	s CAP, CERAMIC 10MF C (1608)
C19	1-112-815-91	s CAP, CERAMIC 10MF C (1608)
C20	1-112-815-91	s CAP, CERAMIC 10MF C (1608)
C21	1-112-815-91	s CAP, CERAMIC 10MF C (1608)
C22	1-112-815-91	s CAP, CERAMIC 10MF C (1608)
C23	1-100-881-91	s CAP, CERAMIC 47MF C (3216)
C24	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C25	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C26	1-100-881-91	s CAP, CERAMIC 47MF C (3216)
C27	1-100-881-91	s CAP, CERAMIC 47MF C (3216)
C28	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C29	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C30	1-112-815-91	s CAP, CERAMIC 10MF C (1608)
C31	1-100-881-91	s CAP, CERAMIC 47MF C (3216)
C32	1-112-815-91	s CAP, CERAMIC 10MF C (1608)
C33	1-100-881-91	s CAP, CERAMIC 47MF C (3216)
C34	1-100-881-91	s CAP, CERAMIC 47MF C (3216)
C35	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C36	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C37	1-112-746-91	s CAP, CERAMIC 4.7MF B (1608)
C38	1-100-881-91	s CAP, CERAMIC 47MF C (3216)
C39	1-100-881-91	s CAP, CERAMIC 47MF C (3216)
C40	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C41	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C42	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C43	1-112-692-81	s CAP,CHIP CERAMIC1000PF CH 1005
C44	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C45	1-164-850-81	s CAP, CHIP CERAMIC 10PF CH 1005
C46	1-164-866-81	s CAP, CHIP CERAMIC 47PF CH 1005
C47	1-100-505-91	s CAP, CERAMIC 0.1MF C (1005)
C48	1-164-936-81	s CAP, CHIP CERAMIC 680PF B 1005
C49	1-164-858-81	s CAP, CHIP CERAMIC 22PF CH 1005
C50	1-165-875-91	s CAP, CHIP CERAMIC 10MF B 3216
C51	1-100-055-21	s CAP, CHIP CERAMIC 22MF B 3225
C52	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C53	1-165-875-91	s CAP, CHIP CERAMIC 10MF B 3216
C54	1-100-881-91	s CAP, CERAMIC 47MF C (3216)
C55	1-100-055-21	s CAP, CHIP CERAMIC 22MF B 3225
C56	1-100-611-91	s CAP, CERAMIC 22MF C (2012)
C57	1-100-881-91	s CAP, CERAMIC 47MF C (3216)

(CD-61 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C58	1-100-611-91	s CAP, CERAMIC 22MF C (2012)
C59	1-112-692-81	s CAP,CHIP CERAMIC1000PF CH 1005
C60	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C61	1-164-850-81	s CAP, CHIP CERAMIC 10PF CH 1005
C62	1-164-866-81	s CAP, CHIP CERAMIC 47PF CH 1005
C63	1-100-505-91	s CAP, CERAMIC 0.1MF C (1005)
C64	1-164-936-81	s CAP, CHIP CERAMIC 680PF B 1005
C65	1-164-858-81	s CAP, CHIP CERAMIC 22PF CH 1005
C66	1-165-875-91	s CAP, CHIP CERAMIC 10MF B 3216
C67	1-100-055-21	s CAP, CHIP CERAMIC 22MF B 3225
C68	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C69	1-165-875-91	s CAP, CHIP CERAMIC 10MF B 3216
C70	1-100-881-91	s CAP, CERAMIC 47MF C (3216)
C71	1-100-611-91	s CAP, CERAMIC 22MF C (2012)
C72	1-100-055-21	s CAP, CHIP CERAMIC 22MF B 3225
C73	1-100-881-91	s CAP, CERAMIC 47MF C (3216)
C74	1-100-611-91	s CAP, CERAMIC 22MF C (2012)
C75	1-112-692-81	s CAP,CHIP CERAMIC1000PF CH 1005
C76	1-164-850-81	s CAP, CHIP CERAMIC 10PF CH 1005
C77	1-164-866-81	s CAP, CHIP CERAMIC 47PF CH 1005
C78	1-100-505-91	s CAP, CERAMIC 0.1MF C (1005)
C79	1-164-936-81	s CAP, CHIP CERAMIC 680PF B 1005
C80	1-164-858-81	s CAP, CHIP CERAMIC 22PF CH 1005
C81	1-165-875-91	s CAP, CHIP CERAMIC 10MF B 3216
C82	1-100-055-21	s CAP, CHIP CERAMIC 22MF B 3225
C83	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C84	1-165-875-91	s CAP, CHIP CERAMIC 10MF B 3216
C85	1-100-881-91	s CAP, CERAMIC 47MF C (3216)
C86	1-100-611-91	s CAP, CERAMIC 22MF C (2012)
C87	1-100-055-21	s CAP, CHIP CERAMIC 22MF B 3225
C88	1-100-881-91	s CAP, CERAMIC 47MF C (3216)
C89	1-100-611-91	s CAP, CERAMIC 22MF C (2012)
C90	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C91	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C92	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C93	1-112-692-81	s CAP,CHIP CERAMIC1000PF CH 1005
C94	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C95	1-164-850-81	s CAP, CHIP CERAMIC 10PF CH 1005
C96	1-164-866-81	s CAP, CHIP CERAMIC 47PF CH 1005
C97	1-100-505-91	s CAP, CERAMIC 0.1MF C (1005)
C98	1-164-936-81	s CAP, CHIP CERAMIC 680PF B 1005
C99	1-164-858-81	s CAP, CHIP CERAMIC 22PF CH 1005
C100	1-165-875-91	s CAP, CHIP CERAMIC 10MF B 3216
C101	1-100-055-21	s CAP, CHIP CERAMIC 22MF B 3225
C102	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C103	1-165-875-91	s CAP, CHIP CERAMIC 10MF B 3216
C104	1-100-881-91	s CAP, CERAMIC 47MF C (3216)
C105	1-100-611-91	s CAP, CERAMIC 22MF C (2012)
C106	1-100-055-21	s CAP, CHIP CERAMIC 22MF B 3225
C107	1-100-881-91	s CAP, CERAMIC 47MF C (3216)
C108	1-100-611-91	s CAP, CERAMIC 22MF C (2012)
C109	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C111	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C201	1-100-881-91	s CAP, CERAMIC 47MF C (3216)
C202	1-100-881-91	s CAP, CERAMIC 47MF C (3216)
C302	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C303	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C304	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C305	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005

(CD-61 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C711	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C712	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C713	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C714	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C715	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C716	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C717	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C718	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C719	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C720	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C721	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C722	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C723	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C724	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C725	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C726	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C727	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C728	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C729	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C730	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C731	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C732	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C733	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C734	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C735	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C736	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C737	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C738	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C739	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C800	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C801	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C802	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C803	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C804	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C805	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C806	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C807	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C808	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C809	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C810	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C811	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C812	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C813	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C814	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C815	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C816	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C817	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C818	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C819	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C820	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C821	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C822	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C823	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C824	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C825	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C826	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C827	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C828	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C829	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(CD-61 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1016	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1017	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1018	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1019	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1020	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1021	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1022	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1023	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1024	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1025	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1026	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1027	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1028	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1029	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1030	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1031	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1032	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1033	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1034	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1035	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1036	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1037	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1101	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1102	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1103	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1104	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1105	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1106	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1107	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1108	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1109	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1110	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1111	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1112	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1201	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1202	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1203	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1204	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1205	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1206	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1207	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1209	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1210	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C1211	1-162-910-91	s	CAP, CERAMIC 5.0PF CH 1608
C1212	1-162-915-91	s	CAP, CERAMIC 10PF CH 1608
C1213	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C1214	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1215	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1216	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1217	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1218	1-162-915-91	s	CAP, CERAMIC 10PF CH 1608
C1219	1-162-915-91	s	CAP, CERAMIC 10PF CH 1608
C1220	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1221	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1222	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1223	1-100-881-91	s	CAP, CERAMIC 47MF C (3216)
C1224	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1225	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1226	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)

(CD-61 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1227	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1228	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
CN1	1-770-627-21	s	PIN, CONNECTOR 10P
CN202	1-820-786-11	s	CONNECTOR, FFC/FPC (ZIF) 33P
CN203	1-820-786-11	s	CONNECTOR, FFC/FPC (ZIF) 33P
CN701	1-770-627-21	s	PIN, CONNECTOR 10P
D1	6-502-197-01	s	DI SML-D12M8WT86SM
D401	8-719-820-42	s	DIODE 1SS302-TE85L
D801	8-719-820-42	s	DIODE 1SS302-TE85L
E1	1-535-877-22	s	CHIP, CHECKER
E2	1-535-877-22	s	CHIP, CHECKER
E3	1-535-877-22	s	CHIP, CHECKER
E4	1-535-877-22	s	CHIP, CHECKER
FB1	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB2	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB3	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB4	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB5	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB6	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB7	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB8	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB9	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB10	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB11	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB12	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB13	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB14	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB15	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB16	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB17	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB18	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB19	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB20	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB21	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB22	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB23	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB24	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB25	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB26	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB27	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB28	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB29	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB30	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB31	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB32	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB301	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB302	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB303	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB400	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB401	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB402	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB403	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB404	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB500	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB501	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB502	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB503	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB602	1-469-094-21	s	FERRITE, EMI (SMD) (1608)

(CD-61 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
FB603	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB604	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB606	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB607	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB608	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB610	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB611	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB612	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB800	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB801	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB802	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB803	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB804	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB805	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB806	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB807	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB901	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB902	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB903	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB904	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB1001	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB1002	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB1003	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB1004	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB1005	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB1006	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB1007	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB1008	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB1009	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB1010	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB1011	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB1012	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB1101	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB1102	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB1103	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB1201	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
IC1	8-759-592-42	s	IC TC7SZ00FU (TE85R)
IC2	8-759-592-42	s	IC TC7SZ00FU (TE85R)
IC3	8-759-592-47	s	IC TC7SZ08FU (TE85R)
IC4	6-712-135-01	o	IC R1173H001D-T1-F
IC5	6-712-135-01	o	IC R1173H001D-T1-F
IC6	8-759-346-27	s	IC LM45BIM3X
IC9	8-759-592-47	s	IC TC7SZ08FU (TE85R)
IC10	8-759-592-47	s	IC TC7SZ08FU (TE85R)
IC11	6-706-220-01	s	IC LTC3411EMS#TR
IC12	6-706-220-01	s	IC LTC3411EMS#TR
IC13	6-706-220-01	s	IC LTC3411EMS#TR
IC14	6-706-220-01	s	IC LTC3411EMS#TR
IC15	6-702-879-01	s	IC R3112N281A-TR-FA
IC16	6-702-879-01	s	IC R3112N281A-TR-FA
IC17	6-706-482-01	s	IC TC7SH00FU (T5RSOYJF)
IC18	8-759-592-47	s	IC TC7SZ08FU (TE85R)
IC301	6-708-538-01	s	IC CDCVF2510APWR
IC302	8-759-592-47	s	IC TC7SZ08FU (TE85R)
IC303	6-707-875-01	s	IC TC74VHC245FT (EKJ)
IC304	6-707-875-01	s	IC TC74VHC245FT (EKJ)
IC305	6-707-868-01	s	IC TC74VHC138FT (EKJ)
IC306	8-759-592-47	s	IC TC7SZ08FU (TE85R)

(CD-61 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
IC308	8-759-592-47	s IC TC7SZ08FU(TE85R)
IC309	6-702-879-01	s IC R3112N281A-TR-FA
IC310	8-759-592-47	s IC TC7SZ08FU(TE85R)
IC401	6-708-637-01	s IC NJM2871BF33-TE2
IC402	6-712-135-01	o IC R1173H001D-T1-F
IC403	8-759-592-47	s IC TC7SZ08FU(TE85R)
IC404	6-712-135-01	o IC R1173H001D-T1-F
IC606	6-707-875-01	s IC TC74VHC245FT(EKJ)
IC607	6-713-512-01	s IC AD9744ACPZ
IC608	6-713-512-01	s IC AD9744ACPZ
IC610	6-708-637-01	s IC NJM2871BF33-TE2
IC611	6-708-637-01	s IC NJM2871BF33-TE2
IC702	6-707-843-01	s IC TC74LCX125FT(EKJ)
IC703	6-707-843-01	s IC TC74LCX125FT(EKJ)
IC704	6-706-482-01	s IC TC7SH00FU(T5RSOYJF)
IC705	6-706-487-01	s IC TC7SH08FU(T5RSOYJF)
IC706	6-709-765-01	s IC EPCS4SI8N(15)
IC707	6-702-879-01	s IC R3112N281A-TR-FA
IC708	6-706-487-01	s IC TC7SH08FU(T5RSOYJF)
IC709	6-706-487-01	s IC TC7SH08FU(T5RSOYJF)
IC710	6-706-487-01	s IC TC7SH08FU(T5RSOYJF)
IC711	6-707-875-01	s IC TC74VHC245FT(EKJ)
IC712	6-706-487-01	s IC TC7SH08FU(T5RSOYJF)
IC801	6-708-637-01	s IC NJM2871BF33-TE2
IC802	6-712-135-01	o IC R1173H001D-T1-F
IC803	8-759-592-47	s IC TC7SZ08FU(TE85R)
IC804	6-707-855-01	s IC TC74LCX574FT(EKJ)
IC805	6-707-855-01	s IC TC74LCX574FT(EKJ)
IC806	6-707-855-01	s IC TC74LCX574FT(EKJ)
IC807	6-712-135-01	o IC R1173H001D-T1-F
IC1002	6-709-765-01	s IC EPCS4SI8N(15)
IC1003	6-707-855-01	s IC TC74LCX574FT(EKJ)
IC1004	6-707-855-01	s IC TC74LCX574FT(EKJ)
IC1005	6-707-856-01	s IC TC74LCX74FT(EKJ)
IC1006	8-759-592-47	s IC TC7SZ08FU(TE85R)
IC1201	8-759-522-74	s IC ADV7176AKSZ
IC1202	8-759-561-46	s IC AD8014ARTZ-REEL7
IC1203	8-759-592-47	s IC TC7SZ08FU(TE85R)
IC1204	6-708-637-01	s IC NJM2871BF33-TE2
L1	1-457-372-21	s COIL, CHOKE 1UH
L2	1-419-630-21	s COIL, CHOKE 4.7UH
L3	1-419-630-21	s COIL, CHOKE 4.7UH
L4	1-419-630-21	s COIL, CHOKE 4.7UH
L5	1-419-630-21	s COIL, CHOKE 4.7UH
L202	1-414-392-41	s INDUCTOR (SMD) 1.0UH
L400	1-414-392-41	s INDUCTOR (SMD) 1.0UH
L401	1-414-392-41	s INDUCTOR (SMD) 1.0UH
L402	1-414-392-41	s INDUCTOR (SMD) 1.0UH
L601	1-414-392-41	s INDUCTOR (SMD) 1.0UH
L602	1-414-392-41	s INDUCTOR (SMD) 1.0UH
L603	1-414-392-41	s INDUCTOR (SMD) 1.0UH
L604	1-414-398-41	s INDUCTOR (SMD) 10.0UH
L605	1-414-463-41	s INDUCTOR, CHIP (J) 10NH
L607	1-414-398-41	s INDUCTOR (SMD) 10.0UH
L701	1-414-392-41	s INDUCTOR (SMD) 1.0UH
L702	1-414-392-41	s INDUCTOR (SMD) 1.0UH
L703	1-414-392-41	s INDUCTOR (SMD) 1.0UH
L704	1-414-392-41	s INDUCTOR (SMD) 1.0UH
L705	1-414-392-41	s INDUCTOR (SMD) 1.0UH

(CD-61 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
L706	1-414-392-41	s INDUCTOR (SMD) 1.0UH
L801	1-414-392-41	s INDUCTOR (SMD) 1.0UH
L802	1-414-392-41	s INDUCTOR (SMD) 1.0UH
L803	1-414-392-41	s INDUCTOR (SMD) 1.0UH
L1001	1-414-392-41	s INDUCTOR (SMD) 1.0UH
L1002	1-414-392-41	s INDUCTOR (SMD) 1.0UH
L1003	1-414-392-41	s INDUCTOR (SMD) 1.0UH
L1004	1-414-398-41	s INDUCTOR (SMD) 10.0UH
L1005	1-414-398-41	s INDUCTOR (SMD) 10.0UH
L1202	1-412-947-21	s INDUCTOR 4.7UH (2520)
L1203	1-414-398-41	s INDUCTOR (SMD) 10.0UH
L1204	1-414-398-41	s INDUCTOR (SMD) 10.0UH
Q1	8-729-928-28	s TRANSISTOR DTA144EE-TL
Q2	8-729-928-28	s TRANSISTOR DTA144EE-TL
Q3	6-551-266-01	s TRANSISTOR SI2304BDS-T1
Q4	8-729-928-82	s TRANSISTOR DTC144EE-TL
Q5	6-551-265-01	s TRANSISTOR SI2307BDS-T1
Q6	8-729-928-28	s TRANSISTOR DTA144EE-TL
Q7	8-729-928-82	s TRANSISTOR DTC144EE-TL
Q8	6-551-265-01	s TRANSISTOR SI2307BDS-T1
Q9	8-729-928-25	s TRANSISTOR 2SA1774TL-QR
Q10	8-729-928-05	s TRANSISTOR 2SC4617TL-QR
Q11	8-729-928-05	s TRANSISTOR 2SC4617TL-QR
Q12	8-729-928-82	s TRANSISTOR DTC144EE-TL
Q1201	8-729-928-82	s TRANSISTOR DTC144EE-TL
R1	1-208-935-81	s RES, CHIP 100K (1005)
R2	1-208-911-81	s RES, CHIP 10K (1005)
R3	1-208-935-81	s RES, CHIP 100K (1005)
R4	1-208-911-81	s RES, CHIP 10K (1005)
R5	1-208-863-81	s RES, CHIP 100 (1005)
R7	1-208-927-81	s RES, CHIP 47K (1005)
R8	1-208-919-81	s RES, CHIP 22K (1005)
R9	1-208-935-81	s RES, CHIP 100K (1005)
R10	1-208-911-81	s RES, CHIP 10K (1005)
R11	1-208-919-81	s RES, CHIP 22K (1005)
R12	1-208-919-81	s RES, CHIP 22K (1005)
R13	1-208-923-81	s RES, CHIP 33K (1005)
R14	1-208-863-81	s RES, CHIP 100 (1005)
R15	1-208-915-81	s RES, CHIP 15K (1005)
R16	1-218-990-81	s CONDUCTOR, CHIP (1005)
R17	1-208-903-81	s RES, CHIP 4.7K (1005)
R18	1-208-911-81	s RES, CHIP 10K (1005)
R19	1-208-871-81	s RES, CHIP 220 (1005)
R20	1-208-855-81	s RES, CHIP 47 (1005)
R21	1-208-927-81	s RES, CHIP 47K (1005)
R22	1-208-931-81	s RES, CHIP 68K (1005)
R23	1-208-911-81	s RES, CHIP 10K (1005)
R24	1-208-911-81	s RES, CHIP 10K (1005)
R25	1-208-883-81	s RES, CHIP 680 (1005)
R26	1-208-911-81	s RES, CHIP 10K (1005)
R27	1-208-863-81	s RES, CHIP 100 (1005)
R28	1-208-919-81	s RES, CHIP 22K (1005)
R29	1-208-863-81	s RES, CHIP 100 (1005)
R34	1-208-887-81	s RES, CHIP 1.0K (1005)
R36	1-208-903-81	s RES, CHIP 4.7K (1005)
R37	1-220-878-81	s RES, CHIP 22 (1005)
R39	1-208-919-81	s RES, CHIP 22K (1005)
R40	1-208-895-81	s RES, CHIP 2.2K (1005)

(CD-61 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R41	1-208-931-81	s RES, CHIP 68K (1005)
R42	1-208-915-81	s RES, CHIP 15K (1005)
R43	1-208-943-81	s RES, CHIP 220K (1005)
R44	1-220-230-91	s RES,SQUARE TYPE CHIP 2.2(3225)
R45	1-208-919-81	s RES, CHIP 22K (1005)
R47	1-218-990-81	s CONDUCTOR, CHIP (1005)
R48	1-208-887-81	s RES, CHIP 1.0K (1005)
R50	1-208-903-81	s RES, CHIP 4.7K (1005)
R51	1-220-878-81	s RES, CHIP 22 (1005)
R53	1-208-919-81	s RES, CHIP 22K (1005)
R54	1-208-863-81	s RES, CHIP 100 (1005)
R55	1-208-935-81	s RES, CHIP 100K (1005)
R56	1-208-915-81	s RES, CHIP 15K (1005)
R57	1-208-943-81	s RES, CHIP 220K (1005)
R58	1-220-230-91	s RES,SQUARE TYPE CHIP 2.2(3225)
R59	1-208-923-81	s RES, CHIP 33K (1005)
R60	1-218-990-81	s CONDUCTOR, CHIP (1005)
R62	1-208-903-81	s RES, CHIP 4.7K (1005)
R63	1-220-878-81	s RES, CHIP 22 (1005)
R65	1-208-919-81	s RES, CHIP 22K (1005)
R66	1-208-899-81	s RES, CHIP 3.3K (1005)
R67	1-208-911-81	s RES, CHIP 10K (1005)
R68	1-208-915-81	s RES, CHIP 15K (1005)
R69	1-208-943-81	s RES, CHIP 220K (1005)
R70	1-220-230-91	s RES,SQUARE TYPE CHIP 2.2(3225)
R71	1-208-911-81	s RES, CHIP 10K (1005)
R72	1-218-990-81	s CONDUCTOR, CHIP (1005)
R73	1-208-919-81	s RES, CHIP 22K (1005)
R74	1-208-887-81	s RES, CHIP 1.0K (1005)
R75	1-208-887-81	s RES, CHIP 1.0K (1005)
R77	1-208-903-81	s RES, CHIP 4.7K (1005)
R79	1-208-919-81	s RES, CHIP 22K (1005)
R80	1-208-895-81	s RES, CHIP 2.2K (1005)
R81	1-208-923-81	s RES, CHIP 33K (1005)
R82	1-208-919-81	s RES, CHIP 22K (1005)
R83	1-220-878-81	s RES, CHIP 22 (1005)
R84	1-208-943-81	s RES, CHIP 220K (1005)
R85	1-220-230-91	s RES,SQUARE TYPE CHIP 2.2(3225)
R86	1-208-919-81	s RES, CHIP 22K (1005)
R87	1-218-990-81	s CONDUCTOR, CHIP (1005)
R201	1-220-878-81	s RES, CHIP 22 (1005)
R202	1-208-863-81	s RES, CHIP 100 (1005)
R203	1-208-863-81	s RES, CHIP 100 (1005)
R204	1-208-863-81	s RES, CHIP 100 (1005)
R205	1-208-863-81	s RES, CHIP 100 (1005)
R206	1-218-990-81	s CONDUCTOR, CHIP (1005)
R207	1-208-871-81	s RES, CHIP 220 (1005)
R208	1-208-855-81	s RES, CHIP 47 (1005)
R209	1-208-855-81	s RES, CHIP 47 (1005)
R210	1-208-855-81	s RES, CHIP 47 (1005)
R211	1-208-855-81	s RES, CHIP 47 (1005)
R214	1-208-855-81	s RES, CHIP 47 (1005)
R215	1-208-855-81	s RES, CHIP 47 (1005)
R216	1-220-878-81	s RES, CHIP 22 (1005)
R217	1-220-878-81	s RES, CHIP 22 (1005)
R218	1-220-878-81	s RES, CHIP 22 (1005)
R219	1-220-878-81	s RES, CHIP 22 (1005)
R220	1-220-878-81	s RES, CHIP 22 (1005)
R222	1-218-990-81	s CONDUCTOR, CHIP (1005)

(CD-61 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R223	1-218-990-81	s CONDUCTOR, CHIP (1005)
R224	1-218-990-81	s CONDUCTOR, CHIP (1005)
R225	1-218-990-81	s CONDUCTOR, CHIP (1005)
R226	1-218-990-81	s CONDUCTOR, CHIP (1005)
R227	1-208-863-81	s RES, CHIP 100 (1005)
R228	1-208-863-81	s RES, CHIP 100 (1005)
R302	1-220-878-81	s RES, CHIP 22 (1005)
R303	1-218-990-81	s CONDUCTOR, CHIP (1005)
R304	1-208-879-81	s RES, CHIP 470 (1005)
R305	1-208-895-81	s RES, CHIP 2.2K (1005)
R306	1-220-878-81	s RES, CHIP 22 (1005)
R307	1-220-878-81	s RES, CHIP 22 (1005)
R309	1-220-878-81	s RES, CHIP 22 (1005)
R310	1-220-878-81	s RES, CHIP 22 (1005)
R311	1-220-878-81	s RES, CHIP 22 (1005)
R312	1-220-878-81	s RES, CHIP 22 (1005)
R313	1-220-878-81	s RES, CHIP 22 (1005)
R314	1-220-878-81	s RES, CHIP 22 (1005)
R315	1-220-878-81	s RES, CHIP 22 (1005)
R317	1-218-990-81	s CONDUCTOR, CHIP (1005)
R318	1-208-911-81	s RES, CHIP 10K (1005)
R326	1-218-990-81	s CONDUCTOR, CHIP (1005)
R327	1-220-870-81	s RES, CHIP 10 (1005)
R328	1-208-895-81	s RES, CHIP 2.2K (1005)
R329	1-208-911-81	s RES, CHIP 10K (1005)
R330	1-220-870-81	s RES, CHIP 10 (1005)
R331	1-220-870-81	s RES, CHIP 10 (1005)
R334	1-218-990-81	s CONDUCTOR, CHIP (1005)
R335	1-208-927-81	s RES, CHIP 47K (1005)
R336	1-208-871-81	s RES, CHIP 220 (1005)
R337	1-208-863-81	s RES, CHIP 100 (1005)
R338	1-208-935-81	s RES, CHIP 100K (1005)
R339	1-208-863-81	s RES, CHIP 100 (1005)
R340	1-208-863-81	s RES, CHIP 100 (1005)
R341	1-208-863-81	s RES, CHIP 100 (1005)
R342	1-208-863-81	s RES, CHIP 100 (1005)
R350	1-208-935-81	s RES, CHIP 100K (1005)
R351	1-208-935-81	s RES, CHIP 100K (1005)
R352	1-208-863-81	s RES, CHIP 100 (1005)
R400	1-218-990-81	s CONDUCTOR, CHIP (1005)
R401	1-208-863-81	s RES, CHIP 100 (1005)
R402	1-208-863-81	s RES, CHIP 100 (1005)
R403	1-208-911-81	s RES, CHIP 10K (1005)
R404	1-208-887-81	s RES, CHIP 1.0K (1005)
R405	1-208-887-81	s RES, CHIP 1.0K (1005)
R406	1-208-911-81	s RES, CHIP 10K (1005)
R407	1-208-855-81	s RES, CHIP 47 (1005)
R408	1-208-855-81	s RES, CHIP 47 (1005)
R409	1-218-990-81	s CONDUCTOR, CHIP (1005)
R410	1-208-863-81	s RES, CHIP 100 (1005)
R411	1-220-878-81	s RES, CHIP 22 (1005)
R412	1-220-878-81	s RES, CHIP 22 (1005)
R413	1-208-855-81	s RES, CHIP 47 (1005)
R414	1-208-911-81	s RES, CHIP 10K (1005)
R415	1-208-887-81	s RES, CHIP 1.0K (1005)
R416	1-208-855-81	s RES, CHIP 47 (1005)
R418	1-208-863-81	s RES, CHIP 100 (1005)
R419	1-208-863-81	s RES, CHIP 100 (1005)
R420	1-208-863-81	s RES, CHIP 100 (1005)

(CD-61 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R421	1-208-887-81 s	RES, CHIP 1.0K (1005)
R425	1-208-887-81 s	RES, CHIP 1.0K (1005)
R426	1-208-887-81 s	RES, CHIP 1.0K (1005)
R428	1-208-919-81 s	RES, CHIP 22K (1005)
R432	1-208-887-81 s	RES, CHIP 1.0K (1005)
R433	1-208-863-81 s	RES, CHIP 100 (1005)
R434	1-208-871-81 s	RES, CHIP 220 (1005)
R435	1-208-919-81 s	RES, CHIP 22K (1005)
R436	1-208-911-81 s	RES, CHIP 10K (1005)
R437	1-208-911-81 s	RES, CHIP 10K (1005)
R438	1-208-895-81 s	RES, CHIP 2.2K (1005)
R440	1-208-863-81 s	RES, CHIP 100 (1005)
R441	1-208-911-81 s	RES, CHIP 10K (1005)
R442	1-208-911-81 s	RES, CHIP 10K (1005)
R500	1-220-878-81 s	RES, CHIP 22 (1005)
R501	1-220-878-81 s	RES, CHIP 22 (1005)
R502	1-220-878-81 s	RES, CHIP 22 (1005)
R503	1-220-878-81 s	RES, CHIP 22 (1005)
R509	1-220-878-81 s	RES, CHIP 22 (1005)
R510	1-220-878-81 s	RES, CHIP 22 (1005)
R511	1-220-878-81 s	RES, CHIP 22 (1005)
R512	1-220-878-81 s	RES, CHIP 22 (1005)
R513	1-220-878-81 s	RES, CHIP 22 (1005)
R514	1-220-878-81 s	RES, CHIP 22 (1005)
R515	1-220-878-81 s	RES, CHIP 22 (1005)
R516	1-220-878-81 s	RES, CHIP 22 (1005)
R517	1-220-878-81 s	RES, CHIP 22 (1005)
R518	1-220-878-81 s	RES, CHIP 22 (1005)
R519	1-220-878-81 s	RES, CHIP 22 (1005)
R520	1-220-878-81 s	RES, CHIP 22 (1005)
R521	1-220-878-81 s	RES, CHIP 22 (1005)
R522	1-220-878-81 s	RES, CHIP 22 (1005)
R601	1-208-911-81 s	RES, CHIP 10K (1005)
R604	1-208-855-81 s	RES, CHIP 47 (1005)
R608	1-208-927-81 s	RES, CHIP 47K (1005)
R609	1-208-863-81 s	RES, CHIP 100 (1005)
R610	1-208-871-81 s	RES, CHIP 220 (1005)
R611	1-208-887-81 s	RES, CHIP 1.0K (1005)
R612	1-208-887-81 s	RES, CHIP 1.0K (1005)
R613	1-218-937-81 s	RES, CHIP 47
R614	1-208-887-81 s	RES, CHIP 1.0K (1005)
R615	1-220-882-81 s	RES, CHIP 33 (1005)
R616	1-208-887-81 s	RES, CHIP 1.0K (1005)
R617	1-208-887-81 s	RES, CHIP 1.0K (1005)
R618	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R619	1-208-887-81 s	RES, CHIP 1.0K (1005)
R620	1-208-887-81 s	RES, CHIP 1.0K (1005)
R621	1-208-887-81 s	RES, CHIP 1.0K (1005)
R623	1-208-863-81 s	RES, CHIP 100 (1005)
R624	1-208-863-81 s	RES, CHIP 100 (1005)
R625	1-218-937-81 s	RES, CHIP 47
R627	1-208-855-81 s	RES, CHIP 47 (1005)
R628	1-208-855-81 s	RES, CHIP 47 (1005)
R629	1-220-870-81 s	RES, CHIP 10 (1005)
R630	1-218-937-81 s	RES, CHIP 47
R631	1-208-863-81 s	RES, CHIP 100 (1005)
R632	1-208-863-81 s	RES, CHIP 100 (1005)
R633	1-208-871-81 s	RES, CHIP 220 (1005)
R635	1-208-887-81 s	RES, CHIP 1.0K (1005)

(CD-61 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R636	1-208-863-81 s	RES, CHIP 100 (1005)
R637	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R638	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R639	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R641	1-208-899-81 s	RES, CHIP 3.3K (1005)
R642	1-208-899-81 s	RES, CHIP 3.3K (1005)
R643	1-208-899-81 s	RES, CHIP 3.3K (1005)
R646	1-208-863-81 s	RES, CHIP 100 (1005)
R647	1-208-863-81 s	RES, CHIP 100 (1005)
R648	1-208-887-81 s	RES, CHIP 1.0K (1005)
R650	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R651	1-208-927-81 s	RES, CHIP 47K (1005)
R653	1-208-855-81 s	RES, CHIP 47 (1005)
R654	1-208-855-81 s	RES, CHIP 47 (1005)
R660	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R663	1-208-899-81 s	RES, CHIP 3.3K (1005)
R664	1-208-899-81 s	RES, CHIP 3.3K (1005)
R666	1-208-887-81 s	RES, CHIP 1.0K (1005)
R667	1-208-887-81 s	RES, CHIP 1.0K (1005)
R668	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R669	1-208-887-81 s	RES, CHIP 1.0K (1005)
R670	1-208-863-81 s	RES, CHIP 100 (1005)
R671	1-208-863-81 s	RES, CHIP 100 (1005)
R672	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R673	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R674	1-208-855-81 s	RES, CHIP 47 (1005)
R675	1-208-855-81 s	RES, CHIP 47 (1005)
R681	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R684	1-208-899-81 s	RES, CHIP 3.3K (1005)
R685	1-208-899-81 s	RES, CHIP 3.3K (1005)
R687	1-208-887-81 s	RES, CHIP 1.0K (1005)
R688	1-208-887-81 s	RES, CHIP 1.0K (1005)
R689	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R690	1-208-887-81 s	RES, CHIP 1.0K (1005)
R691	1-208-863-81 s	RES, CHIP 100 (1005)
R692	1-208-863-81 s	RES, CHIP 100 (1005)
R693	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R694	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R701	1-208-911-81 s	RES, CHIP 10K (1005)
R702	1-208-855-81 s	RES, CHIP 47 (1005)
R703	1-208-887-81 s	RES, CHIP 1.0K (1005)
R705	1-208-863-81 s	RES, CHIP 100 (1005)
R706	1-208-855-81 s	RES, CHIP 47 (1005)
R707	1-208-863-81 s	RES, CHIP 100 (1005)
R708	1-208-855-81 s	RES, CHIP 47 (1005)
R709	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R710	1-208-855-81 s	RES, CHIP 47 (1005)
R711	1-208-855-81 s	RES, CHIP 47 (1005)
R712	1-208-855-81 s	RES, CHIP 47 (1005)
R713	1-208-855-81 s	RES, CHIP 47 (1005)
R714	1-208-855-81 s	RES, CHIP 47 (1005)
R715	1-208-863-81 s	RES, CHIP 100 (1005)
R719	1-208-855-81 s	RES, CHIP 47 (1005)
R720	1-218-933-81 s	RES, CHIP 22
R721	1-218-933-81 s	RES, CHIP 22
R722	1-208-871-81 s	RES, CHIP 220 (1005)
R724	1-218-933-81 s	RES, CHIP 22
R725	1-208-855-81 s	RES, CHIP 47 (1005)
R727	1-208-863-81 s	RES, CHIP 100 (1005)

(CD-61 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R729	1-220-878-81	s RES, CHIP 22 (1005)
R730	1-220-878-81	s RES, CHIP 22 (1005)
R733	1-208-919-81	s RES, CHIP 22K (1005)
R734	1-208-919-81	s RES, CHIP 22K (1005)
R735	1-208-879-81	s RES, CHIP 470 (1005)
R736	1-208-855-81	s RES, CHIP 47 (1005)
R737	1-208-855-81	s RES, CHIP 47 (1005)
R739	1-208-855-81	s RES, CHIP 47 (1005)
R740	1-208-855-81	s RES, CHIP 47 (1005)
R741	1-208-855-81	s RES, CHIP 47 (1005)
R742	1-208-855-81	s RES, CHIP 47 (1005)
R743	1-208-855-81	s RES, CHIP 47 (1005)
R745	1-208-855-81	s RES, CHIP 47 (1005)
R746	1-208-911-81	s RES, CHIP 10K (1005)
R747	1-208-871-81	s RES, CHIP 220 (1005)
R748	1-208-871-81	s RES, CHIP 220 (1005)
R749	1-208-871-81	s RES, CHIP 220 (1005)
R750	1-208-871-81	s RES, CHIP 220 (1005)
R751	1-208-871-81	s RES, CHIP 220 (1005)
R752	1-208-871-81	s RES, CHIP 220 (1005)
R753	1-208-863-81	s RES, CHIP 100 (1005)
R754	1-208-863-81	s RES, CHIP 100 (1005)
R755	1-208-863-81	s RES, CHIP 100 (1005)
R756	1-208-863-81	s RES, CHIP 100 (1005)
R757	1-208-863-81	s RES, CHIP 100 (1005)
R758	1-218-990-81	s CONDUCTOR, CHIP (1005)
R800	1-218-990-81	s CONDUCTOR, CHIP (1005)
R801	1-208-863-81	s RES, CHIP 100 (1005)
R802	1-208-863-81	s RES, CHIP 100 (1005)
R803	1-208-919-81	s RES, CHIP 22K (1005)
R804	1-208-911-81	s RES, CHIP 10K (1005)
R805	1-208-887-81	s RES, CHIP 1.0K (1005)
R806	1-208-887-81	s RES, CHIP 1.0K (1005)
R807	1-208-911-81	s RES, CHIP 10K (1005)
R808	1-208-855-81	s RES, CHIP 47 (1005)
R809	1-208-855-81	s RES, CHIP 47 (1005)
R810	1-218-990-81	s CONDUCTOR, CHIP (1005)
R811	1-208-863-81	s RES, CHIP 100 (1005)
R812	1-220-878-81	s RES, CHIP 22 (1005)
R813	1-220-878-81	s RES, CHIP 22 (1005)
R814	1-208-855-81	s RES, CHIP 47 (1005)
R815	1-208-887-81	s RES, CHIP 1.0K (1005)
R819	1-208-911-81	s RES, CHIP 10K (1005)
R820	1-208-887-81	s RES, CHIP 1.0K (1005)
R821	1-208-863-81	s RES, CHIP 100 (1005)
R822	1-208-855-81	s RES, CHIP 47 (1005)
R827	1-208-871-81	s RES, CHIP 220 (1005)
R830	1-208-887-81	s RES, CHIP 1.0K (1005)
R831	1-208-887-81	s RES, CHIP 1.0K (1005)
R832	1-220-878-81	s RES, CHIP 22 (1005)
R833	1-220-878-81	s RES, CHIP 22 (1005)
R834	1-220-878-81	s RES, CHIP 22 (1005)
R835	1-208-871-81	s RES, CHIP 220 (1005)
R836	1-208-919-81	s RES, CHIP 22K (1005)
R837	1-208-911-81	s RES, CHIP 10K (1005)
R838	1-208-911-81	s RES, CHIP 10K (1005)
R839	1-208-895-81	s RES, CHIP 2.2K (1005)
R840	1-208-959-81	s RES, CHIP 1M (1005)
R841	1-208-863-81	s RES, CHIP 100 (1005)

(CD-61 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R842	1-208-911-81	s RES, CHIP 10K (1005)
R843	1-208-911-81	s RES, CHIP 10K (1005)
R901	1-220-878-81	s RES, CHIP 22 (1005)
R902	1-220-878-81	s RES, CHIP 22 (1005)
R903	1-220-878-81	s RES, CHIP 22 (1005)
R904	1-220-878-81	s RES, CHIP 22 (1005)
R910	1-220-878-81	s RES, CHIP 22 (1005)
R911	1-220-878-81	s RES, CHIP 22 (1005)
R912	1-220-878-81	s RES, CHIP 22 (1005)
R913	1-220-878-81	s RES, CHIP 22 (1005)
R914	1-220-878-81	s RES, CHIP 22 (1005)
R915	1-220-878-81	s RES, CHIP 22 (1005)
R916	1-220-878-81	s RES, CHIP 22 (1005)
R917	1-220-878-81	s RES, CHIP 22 (1005)
R918	1-220-878-81	s RES, CHIP 22 (1005)
R919	1-220-878-81	s RES, CHIP 22 (1005)
R920	1-220-878-81	s RES, CHIP 22 (1005)
R921	1-220-878-81	s RES, CHIP 22 (1005)
R922	1-220-878-81	s RES, CHIP 22 (1005)
R923	1-220-878-81	s RES, CHIP 22 (1005)
R1001	1-208-855-81	s RES, CHIP 47 (1005)
R1002	1-208-855-81	s RES, CHIP 47 (1005)
R1003	1-208-855-81	s RES, CHIP 47 (1005)
R1004	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1005	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1009	1-208-871-81	s RES, CHIP 220 (1005)
R1010	1-208-871-81	s RES, CHIP 220 (1005)
R1011	1-208-911-81	s RES, CHIP 10K (1005)
R1012	1-220-870-81	s RES, CHIP 10 (1005)
R1013	1-220-870-81	s RES, CHIP 10 (1005)
R1014	1-208-863-81	s RES, CHIP 100 (1005)
R1015	1-208-855-81	s RES, CHIP 47 (1005)
R1016	1-208-855-81	s RES, CHIP 47 (1005)
R1017	1-220-878-81	s RES, CHIP 22 (1005)
R1018	1-220-878-81	s RES, CHIP 22 (1005)
R1019	1-220-878-81	s RES, CHIP 22 (1005)
R1020	1-208-871-81	s RES, CHIP 220 (1005)
R1021	1-208-871-81	s RES, CHIP 220 (1005)
R1022	1-208-855-81	s RES, CHIP 47 (1005)
R1023	1-208-855-81	s RES, CHIP 47 (1005)
R1024	1-208-855-81	s RES, CHIP 47 (1005)
R1025	1-220-870-81	s RES, CHIP 10 (1005)
R1027	1-208-855-81	s RES, CHIP 47 (1005)
R1028	1-208-855-81	s RES, CHIP 47 (1005)
R1029	1-208-855-81	s RES, CHIP 47 (1005)
R1030	1-208-855-81	s RES, CHIP 47 (1005)
R1031	1-220-870-81	s RES, CHIP 10 (1005)
R1034	1-208-855-81	s RES, CHIP 47 (1005)
R1035	1-208-855-81	s RES, CHIP 47 (1005)
R1036	1-208-855-81	s RES, CHIP 47 (1005)
R1037	1-208-863-81	s RES, CHIP 100 (1005)
R1038	1-208-863-81	s RES, CHIP 100 (1005)
R1039	1-208-863-81	s RES, CHIP 100 (1005)
R1040	1-220-878-81	s RES, CHIP 22 (1005)
R1041	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1042	1-208-871-81	s RES, CHIP 220 (1005)
R1043	1-208-871-81	s RES, CHIP 220 (1005)
R1044	1-208-887-81	s RES, CHIP 1.0K (1005)
R1045	1-208-863-81	s RES, CHIP 100 (1005)

(CD-61 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R1046	1-208-855-81	s RES, CHIP 47 (1005)
R1047	1-208-871-81	s RES, CHIP 220 (1005)
R1048	1-208-863-81	s RES, CHIP 100 (1005)
R1049	1-208-863-81	s RES, CHIP 100 (1005)
R1050	1-208-863-81	s RES, CHIP 100 (1005)
R1101	1-208-855-81	s RES, CHIP 47 (1005)
R1201	1-208-855-81	s RES, CHIP 47 (1005)
R1202	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1203	1-208-855-81	s RES, CHIP 47 (1005)
R1204	1-208-863-81	s RES, CHIP 100 (1005)
R1205	1-208-863-81	s RES, CHIP 100 (1005)
R1206	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1207	1-208-863-81	s RES, CHIP 100 (1005)
R1208	1-208-863-81	s RES, CHIP 100 (1005)
R1209	1-208-863-81	s RES, CHIP 100 (1005)
R1210	1-208-863-81	s RES, CHIP 100 (1005)
R1211	1-208-927-81	s RES, CHIP 47K (1005)
R1212	1-208-855-81	s RES, CHIP 47 (1005)
R1213	1-208-875-81	s RES, CHIP 330 (1005)
R1214	1-208-875-81	s RES, CHIP 330 (1005)
R1215	1-208-863-81	s RES, CHIP 100 (1005)
R1216	1-208-891-81	s RES, CHIP 1.5K (1005)
R1217	1-208-871-81	s RES, CHIP 220 (1005)
R1218	1-208-891-81	s RES, CHIP 1.5K (1005)
R1219	1-208-907-81	s RES, CHIP 6.8K (1005)
R1220	1-208-883-81	s RES, CHIP 680 (1005)
R1221	1-208-871-81	s RES, CHIP 220 (1005)
R1222	1-208-883-81	s RES, CHIP 680 (1005)
R1223	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1224	1-208-871-81	s RES, CHIP 220 (1005)
R1225	1-208-871-81	s RES, CHIP 220 (1005)
R1226	1-220-878-81	s RES, CHIP 22 (1005)
R1227	1-208-867-81	s RES, CHIP 150 (1005)
R1228	1-208-855-81	s RES, CHIP 47 (1005)
R1229	1-208-903-81	s RES, CHIP 4.7K (1005)
R1230	1-208-903-81	s RES, CHIP 4.7K (1005)
R1231	1-208-863-81	s RES, CHIP 100 (1005)
R1232	1-208-879-81	s RES, CHIP 470 (1005)
R1233	1-208-879-81	s RES, CHIP 470 (1005)
R1234	1-208-887-81	s RES, CHIP 1.0K (1005)
R1235	1-208-911-81	s RES, CHIP 10K (1005)
R1236	1-208-887-81	s RES, CHIP 1.0K (1005)
R1237	1-208-887-81	s RES, CHIP 1.0K (1005)
R1238	1-218-990-81	s CONDUCTOR, CHIP (1005)
RB205	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB209	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB211	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB212	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB213	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB214	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB215	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB216	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB217	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB218	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB219	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB220	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB221	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB302	1-234-381-21	s RES, NETWORK 100K (1005X4)
RB303	1-234-381-21	s RES, NETWORK 100K (1005X4)

(CD-61 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
RB304	1-234-381-21	s RES, NETWORK 100K (1005X4)
RB305	1-234-373-21	s RES, NETWORK 220 (1005X4)
RB306	1-234-373-21	s RES, NETWORK 220 (1005X4)
RB307	1-234-381-21	s RES, NETWORK 100K (1005X4)
RB308	1-234-373-21	s RES, NETWORK 220 (1005X4)
RB309	1-234-373-21	s RES, NETWORK 220 (1005X4)
RB310	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB311	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB312	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB313	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB317	1-234-381-21	s RES, NETWORK 100K (1005X4)
RB318	1-234-381-21	s RES, NETWORK 100K (1005X4)
RB401	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB402	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB403	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB404	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB405	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB406	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB502	1-234-370-21	s RES, NETWORK 22 (1005X4)
RB503	1-234-370-21	s RES, NETWORK 22 (1005X4)
RB504	1-234-370-21	s RES, NETWORK 22 (1005X4)
RB505	1-234-370-21	s RES, NETWORK 22 (1005X4)
RB506	1-234-370-21	s RES, NETWORK 22 (1005X4)
RB507	1-234-370-21	s RES, NETWORK 22 (1005X4)
RB508	1-234-370-21	s RES, NETWORK 22 (1005X4)
RB509	1-234-370-21	s RES, NETWORK 22 (1005X4)
RB510	1-234-370-21	s RES, NETWORK 22 (1005X4)
RB511	1-234-370-21	s RES, NETWORK 22 (1005X4)
RB512	1-234-370-21	s RES, NETWORK 22 (1005X4)
RB513	1-234-370-21	s RES, NETWORK 22 (1005X4)
RB514	1-234-370-21	s RES, NETWORK 22 (1005X4)
RB517	1-234-370-21	s RES, NETWORK 22 (1005X4)
RB518	1-234-370-21	s RES, NETWORK 22 (1005X4)
RB519	1-234-370-21	s RES, NETWORK 22 (1005X4)
RB520	1-234-370-21	s RES, NETWORK 22 (1005X4)
RB521	1-234-370-21	s RES, NETWORK 22 (1005X4)
RB522	1-234-370-21	s RES, NETWORK 22 (1005X4)
RB523	1-234-370-21	s RES, NETWORK 22 (1005X4)
RB524	1-234-370-21	s RES, NETWORK 22 (1005X4)
RB601	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB602	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB603	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB605	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB606	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB607	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB608	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB609	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB610	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB611	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB612	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB613	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB616	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB630	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB631	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB632	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB633	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB634	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB635	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB636	1-234-372-21	s RES, NETWORK 100 (1005X4)

(CD-61 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description		
RB922	1-234-370-21	s	RES, NETWORK	22	(1005X4)
RB923	1-234-370-21	s	RES, NETWORK	22	(1005X4)
RB924	1-234-370-21	s	RES, NETWORK	22	(1005X4)
RB925	1-234-370-21	s	RES, NETWORK	22	(1005X4)
RB1001	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB1002	1-234-373-21	s	RES, NETWORK	220	(1005X4)
RB1003	1-234-373-21	s	RES, NETWORK	220	(1005X4)
RB1004	1-234-373-21	s	RES, NETWORK	220	(1005X4)
RB1005	1-234-373-21	s	RES, NETWORK	220	(1005X4)
RB1006	1-234-373-21	s	RES, NETWORK	220	(1005X4)
RB1007	1-234-373-21	s	RES, NETWORK	220	(1005X4)
RB1008	1-234-373-21	s	RES, NETWORK	220	(1005X4)
RB1009	1-234-373-21	s	RES, NETWORK	220	(1005X4)
RB1010	1-234-373-21	s	RES, NETWORK	220	(1005X4)
RB1011	1-234-373-21	s	RES, NETWORK	220	(1005X4)
RB1012	1-234-373-21	s	RES, NETWORK	220	(1005X4)
RB1013	1-234-371-21	s	RES, NETWORK	47	(1005X4)
RB1014	1-234-371-21	s	RES, NETWORK	47	(1005X4)
RB1015	1-234-371-21	s	RES, NETWORK	47	(1005X4)
RB1016	1-234-371-21	s	RES, NETWORK	47	(1005X4)
RB1017	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB1018	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB1019	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB1022	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB1023	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB1101	1-234-373-21	s	RES, NETWORK	220	(1005X4)
RB1102	1-234-373-21	s	RES, NETWORK	220	(1005X4)
RB1103	1-234-373-21	s	RES, NETWORK	220	(1005X4)
RB1104	1-234-373-21	s	RES, NETWORK	220	(1005X4)
RB1105	1-234-373-21	s	RES, NETWORK	220	(1005X4)
RB1106	1-234-373-21	s	RES, NETWORK	220	(1005X4)
RB1107	1-234-373-21	s	RES, NETWORK	220	(1005X4)
RB1108	1-234-373-21	s	RES, NETWORK	220	(1005X4)
RB1109	1-234-373-21	s	RES, NETWORK	220	(1005X4)
RB1110	1-234-373-21	s	RES, NETWORK	220	(1005X4)
RB1111	1-234-373-21	s	RES, NETWORK	220	(1005X4)
RB1112	1-234-373-21	s	RES, NETWORK	220	(1005X4)
RB1113	1-234-373-21	s	RES, NETWORK	220	(1005X4)
RB1114	1-234-373-21	s	RES, NETWORK	220	(1005X4)
RB1203	1-234-373-21	s	RES, NETWORK	220	(1005X4)
RB1204	1-234-373-21	s	RES, NETWORK	220	(1005X4)
S701	1-692-270-41	s	SWITCH, SLIDE		
THP1	△ 1-804-458-21	s	THERMISTOR, POSITIVE		
THP2	△ 1-804-458-21	s	THERMISTOR, POSITIVE		
THP3	△ 1-804-458-21	s	THERMISTOR, POSITIVE		
THP4	△ 1-804-616-21	s	THERMISTOR, POSITIVE		
THP5	△ 1-804-616-21	s	THERMISTOR, POSITIVE		
THP6	△ 1-804-616-21	s	THERMISTOR, POSITIVE		
THP7	△ 1-804-616-21	s	THERMISTOR, POSITIVE		
THP8	△ 1-804-616-21	s	THERMISTOR, POSITIVE		
THP9	△ 1-804-616-21	s	THERMISTOR, POSITIVE		
THP201	△ 1-804-616-21	s	THERMISTOR, POSITIVE		
TP121	1-535-877-22	s	CHIP, CHECKER		
TP301	1-535-877-22	s	CHIP, CHECKER		
TP302	1-535-877-22	s	CHIP, CHECKER		
TP600	1-535-877-22	s	CHIP, CHECKER		
X101	1-795-831-12	s	OSCILLATOR, CRYSTAL (VCX		

(CD-61 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
X400	1-813-480-11	s OSCILLATOR, CRYSTAL
X602	1-814-223-11	s OSCILLATOR, CRYSTAL
X801	1-813-480-11	s OSCILLATOR, CRYSTAL

CN-3069 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1708-077-A	s MOUNTED CIRCUIT BOARD, CN-3069
C1	1-114-236-21	s CAP, CERAMIC 22MF B (3225)
C2	1-114-236-21	s CAP, CERAMIC 22MF B (3225)
C3	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C4	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C5	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C6	1-164-939-81	s CAP, CHIPCERAMIC 2200PF B 1005
C7	1-164-939-81	s CAP, CHIPCERAMIC 2200PF B 1005
C8	1-164-939-81	s CAP, CHIPCERAMIC 2200PF B 1005
C9	1-164-939-81	s CAP, CHIPCERAMIC 2200PF B 1005
C10	1-164-939-81	s CAP, CHIPCERAMIC 2200PF B 1005
C11	1-164-939-81	s CAP, CHIPCERAMIC 2200PF B 1005
C12	1-164-939-81	s CAP, CHIPCERAMIC 2200PF B 1005
C13	1-164-882-81	s CAP,CHIP CERAMIC 220PF CH 1005
C15	1-164-939-81	s CAP, CHIPCERAMIC 2200PF B 1005
C16	1-164-939-81	s CAP, CHIPCERAMIC 2200PF B 1005
CN1	1-816-041-12	s CONNECTOR, ROUND TYPE 20P
CN2	1-816-755-21	s CONNECTOR (SM20B-SRSS-TB)
FB1	1-414-772-21	s FERRITE. EMI (SMD) (2012)
FB2	1-414-772-21	s FERRITE. EMI (SMD) (2012)
FB3	1-414-772-21	s FERRITE. EMI (SMD) (2012)
FB4	1-414-772-21	s FERRITE. EMI (SMD) (2012)
FB5	1-469-094-21	s FERRITE, EMI (SMD) (1608)
FB6	1-400-832-21	s SMD EMI FERRITE
FB7	1-400-832-21	s SMD EMI FERRITE
FB8	1-400-832-21	s SMD EMI FERRITE
FB9	1-400-832-21	s SMD EMI FERRITE
FB10	1-400-832-21	s SMD EMI FERRITE
FB11	1-400-832-21	s SMD EMI FERRITE
FB12	1-400-832-21	s SMD EMI FERRITE
FB13	1-400-832-21	s SMD EMI FERRITE
FB14	1-400-832-21	s SMD EMI FERRITE
FB15	1-400-832-21	s SMD EMI FERRITE
FB16	1-400-832-21	s SMD EMI FERRITE
FB17	1-400-832-21	s SMD EMI FERRITE
FB18	1-400-832-21	s SMD EMI FERRITE
FB19	1-400-832-21	s SMD EMI FERRITE
FB20	1-400-832-21	s SMD EMI FERRITE
FL1	1-239-897-22	s FILTER, EMI (SMD)
FL2	1-239-897-22	s FILTER, EMI (SMD)
JC1	1-218-990-81	s CONDUCTOR, CHIP (1005)
JC2	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1	1-208-867-81	s RES, CHIP 150 (1005)
R2	1-208-867-81	s RES, CHIP 150 (1005)
R3	1-208-867-81	s RES, CHIP 150 (1005)
R4	1-208-867-81	s RES, CHIP 150 (1005)

CN-3070 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1708-078-A	s MOUNTED CIRCUIT BOARD, CN-3070
C1	1-164-882-81	s CAP,CHIP CERAMIC 220PF CH 1005
C2	1-164-882-81	s CAP,CHIP CERAMIC 220PF CH 1005
C3	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C4	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C5	1-164-939-81	s CAP, CHIPCERAMIC 2200PF B 1005
C6	1-164-939-81	s CAP, CHIPCERAMIC 2200PF B 1005
C7	1-164-939-81	s CAP, CHIPCERAMIC 2200PF B 1005
C8	1-164-939-81	s CAP, CHIPCERAMIC 2200PF B 1005
C9	1-164-939-81	s CAP, CHIPCERAMIC 2200PF B 1005
C10	1-164-939-81	s CAP, CHIPCERAMIC 2200PF B 1005
C11	1-164-939-81	s CAP, CHIPCERAMIC 2200PF B 1005
C12	1-164-939-81	s CAP, CHIPCERAMIC 2200PF B 1005
CN1	1-562-221-31	s CONNECTOR (ROUND TYPE) (R-F)12P
CN2	1-816-113-21	s CONNECTOR 15P
FB1	1-414-772-21	s FERRITE. EMI (SMD) (2012)
FB2	1-414-772-21	s FERRITE. EMI (SMD) (2012)
FB3	1-400-832-21	s SMD EMI FERRITE
FB4	1-400-832-21	s SMD EMI FERRITE
FB5	1-400-832-21	s SMD EMI FERRITE
FB6	1-400-832-21	s SMD EMI FERRITE
FB7	1-400-832-21	s SMD EMI FERRITE
FB8	1-400-832-21	s SMD EMI FERRITE
FB9	1-400-832-21	s SMD EMI FERRITE
FB10	1-400-832-21	s SMD EMI FERRITE
FB11	1-400-832-21	s SMD EMI FERRITE
FB12	1-400-832-21	s SMD EMI FERRITE
FB13	1-400-832-21	s SMD EMI FERRITE

CN-3071 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1708-079-A	s MOUNTED CIRCUIT BOARD, CN-3071
C2	1-114-214-81	s CAP,CHIP CERAMIC470PF CH1005
CN1	1-822-305-11	s CONNECTOR, ROUND TYPE 3P
CN3	1-770-623-21	s PIN, CONNECTOR 6P
FB1	1-400-832-21	s SMD EMI FERRITE
FB2	1-400-832-21	s SMD EMI FERRITE
FB3	1-400-832-21	s SMD EMI FERRITE
FB4	1-400-832-21	s SMD EMI FERRITE
FB5	1-400-832-21	s SMD EMI FERRITE
FB6	1-400-832-21	s SMD EMI FERRITE
L2	1-457-217-21	o COMMON MODE CHOKE COIL

CN-3072 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1708-087-A	s MOUNTED CIRCUIT BOARD, CN-3072
C1	1-114-214-81	s CAP,CHIP CERAMIC470PF CH1005
C2	1-112-692-81	s CAP,CHIP CERAMIC1000PF CH 1005
C3	1-112-692-81	s CAP,CHIP CERAMIC1000PF CH 1005
CN1	1-817-940-11	s CONNECTOR, ROUND TYPE 5P
CN2	1-770-625-21	s PIN, CONNECTOR 8P
FB1	1-469-094-21	s FERRITE, EMI (SMD) (1608)
FB2	1-414-445-21	s FERRITE, EMI (SMD) (1608)
FB3	1-414-445-21	s FERRITE, EMI (SMD) (1608)
L1	1-457-217-21	o COMMON MODE CHOKE COIL

CN-3073 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1708-266-A	s MOUNTED CIRCUIT BOARD, CN-3073
C1	1-164-939-81	s CAP, CHIP CERAMIC 2200PF B 1005
C2	1-164-939-81	s CAP, CHIP CERAMIC 2200PF B 1005
CN1	1-770-620-21	s PIN, CONNECTOR 3P
CN2	1-507-743-21	s JACK, STEREO MINIATURE
L1	1-428-965-11	s COIL, CHOKE (SMD)

CN-3074 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1708-267-A	s MOUNTED CIRCUIT BOARD, CN-3074
C1	1-100-581-81	s CAP,CHIP CERAMIC0.0047MF B1005
C2	1-100-581-81	s CAP,CHIP CERAMIC0.0047MF B1005
CN1	1-770-625-21	s PIN, CONNECTOR 8P
CN2	1-766-696-11	o CONNECTOR, ROUND TYPE 8P
FB1	1-234-518-21	s ARRAY, FERRITE CHIP
FB2	1-400-832-21	s SMD EMI FERRITE
FB3	1-400-832-21	s SMD EMI FERRITE
FB4	1-469-094-21	s FERRITE, EMI (SMD) (1608)
FB5	1-469-094-21	s FERRITE, EMI (SMD) (1608)
FB6	1-469-094-21	s FERRITE, EMI (SMD) (1608)

CN-3075 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1708-268-A	s MOUNTED CIRCUIT BOARD, CN-3075
2pcs	3-863-319-01	s BRACKET BNC
CN1	1-770-621-21	s PIN, CONNECTOR 4P
CN2	1-580-724-12	s CONNECTOR, BNC
CN3	1-580-724-12	s CONNECTOR, BNC
R1	1-218-990-81	s CONDUCTOR, CHIP (1005)
R5	1-218-990-81	s CONDUCTOR, CHIP (1005)

CN-3076 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1708-269-A	s MOUNTED CIRCUIT BOARD, CN-3076
C1	1-114-236-21	s CAP, CERAMIC 22MF B (3225)
C2	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C3	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C4	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C5	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C6	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C7	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C8	1-115-339-91	s CAP, CERAMIC 0.1MF B (2012)
C9	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C10	1-100-671-91	s CAP, CERAMIC 4.7MF C (3216)
C11	1-112-692-81	s CAP,CHIP CERAMIC1000PF CH 1005
C12	1-100-671-91	s CAP, CERAMIC 4.7MF C (3216)
C13	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C14	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C15	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C16	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C17	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C18	1-112-692-81	s CAP,CHIP CERAMIC1000PF CH 1005
C19	1-112-692-81	s CAP,CHIP CERAMIC1000PF CH 1005
C20	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C21	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C23	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C24	1-100-671-91	s CAP, CERAMIC 4.7MF C (3216)
C25	1-164-882-81	s CAP,CHIP CERAMIC 220PF CH 1005
C26	1-164-882-81	s CAP,CHIP CERAMIC 220PF CH 1005
C27	1-164-882-81	s CAP,CHIP CERAMIC 220PF CH 1005
C28	1-164-882-81	s CAP,CHIP CERAMIC 220PF CH 1005
C29	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
CN1	1-794-142-31	s CONNECTOR, FFC/FPC(ZIF) AN 36P
CN2	1-770-160-21	s PIN, CONNECTOR (PC BOARD) 2P
CN4	1-770-620-21	s PIN, CONNECTOR 3P
CN5	1-770-621-21	s PIN, CONNECTOR 4P
CN6	1-770-625-21	s PIN, CONNECTOR 8P
CN7	1-563-929-11	s CONNECTOR, ROUND TYPE (RF) 4P
CN8	1-562-222-21	s CONNECTOR, ROUND TYPE 6P
CN9	1-565-443-11	o RECEPTACLE, CONNECTOR 10P
D1	8-719-046-86	s DIODE 1FJ6TP
D3	8-719-069-59	s DI UDZSUSTE-178.2B
FB1	1-400-832-21	s SMD EMI FERRITE
FB2	1-400-832-21	s SMD EMI FERRITE
FB3	1-400-832-21	s SMD EMI FERRITE
FB4	1-400-832-21	s SMD EMI FERRITE
FB5	1-400-832-21	s SMD EMI FERRITE
FB6	1-400-832-21	s SMD EMI FERRITE
FB7	1-400-832-21	s SMD EMI FERRITE
FB8	1-400-832-21	s SMD EMI FERRITE
FB9	1-414-445-21	s FERRITE, EMI (SMD) (1608)
FB10	1-414-445-21	s FERRITE, EMI (SMD) (1608)
FB11	1-400-832-21	s SMD EMI FERRITE
FB12	1-400-832-21	s SMD EMI FERRITE
FB13	1-414-445-21	s FERRITE, EMI (SMD) (1608)
FB14	1-400-832-21	s SMD EMI FERRITE
FL1	1-239-897-22	s FILTER, EMI (SMD)
L1	1-457-217-21	o COMMON MODE CHOKE COIL
L2	1-457-217-21	o COMMON MODE CHOKE COIL

(CN-3076 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
L3	1-457-217-21	o COMMON MODE CHOKE COIL
Q1	8-729-928-05	s TRANSISTOR 2SC4617TL-QR
R1	1-208-879-81	s RES, CHIP 470 (1005)
R2	1-208-879-81	s RES, CHIP 470 (1005)
R3	1-208-879-81	s RES, CHIP 470 (1005)
R4	1-208-879-81	s RES, CHIP 470 (1005)
R5	1-208-879-81	s RES, CHIP 470 (1005)
R6	1-208-863-81	s RES, CHIP 100 (1005)
R7	1-208-863-81	s RES, CHIP 100 (1005)
R8	1-208-863-81	s RES, CHIP 100 (1005)
R9	1-208-863-81	s RES, CHIP 100 (1005)
R10	1-208-863-81	s RES, CHIP 100 (1005)
R11	1-208-911-81	s RES, CHIP 10K (1005)
R12	1-208-911-81	s RES, CHIP 10K (1005)
S1	1-570-863-11	s SWITCH, SLIDE
S2	1-570-853-11	s SWITCH, SLIDE
S3	1-570-853-11	s SWITCH, SLIDE
THP1	Δ 1-802-063-21	s THERMISTOR, POSITIVE
THP2	Δ 1-802-063-21	s THERMISTOR, POSITIVE
THP3	Δ 1-802-063-21	s THERMISTOR, POSITIVE

CN-3077 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1708-270-A	s MOUNTED CIRCUIT BOARD, CN-3077
C1	1-114-214-81	s CAP,CHIP CERAMIC470PF CH1005
C2	1-114-214-81	s CAP,CHIP CERAMIC470PF CH1005
CN1	1-770-623-21	s PIN, CONNECTOR 6P
CN2	1-822-305-11	s CONNECTOR, ROUND TYPE 3P
CN3	1-822-305-11	s CONNECTOR, ROUND TYPE 3P
FB1	1-400-832-21	s SMD EMI FERRITE
FB2	1-400-832-21	s SMD EMI FERRITE
FB3	1-400-832-21	s SMD EMI FERRITE
FB4	1-400-832-21	s SMD EMI FERRITE
FB5	1-400-832-21	s SMD EMI FERRITE
FB6	1-400-832-21	s SMD EMI FERRITE
FB7	1-400-832-21	s SMD EMI FERRITE
FB8	1-400-832-21	s SMD EMI FERRITE
FB9	1-400-832-21	s SMD EMI FERRITE
FB10	1-400-832-21	s SMD EMI FERRITE
L1	1-457-217-21	o COMMON MODE CHOKE COIL
L2	1-457-217-21	o COMMON MODE CHOKE COIL

CN-3078 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1708-271-A	s MOUNTED CIRCUIT BOARD, CN-3078
C1	1-114-236-21	s CAP, CERAMIC 22MF B (3225)
C2	1-115-339-91	s CAP, CERAMIC 0.1MF B (2012)
C3	1-115-339-91	s CAP, CERAMIC 0.1MF B (2012)
CN1	1-820-882-11	s CONNECTOR (RECEPTACLE), XLR
CN2	1-770-470-21	s PIN, CONNECTOR (PC BOARD) 6P
FB1	1-414-772-21	s FERRITE. EMI (SMD) (2012)
FB2	1-414-772-21	s FERRITE. EMI (SMD) (2012)
FB3	1-414-772-21	s FERRITE. EMI (SMD) (2012)
FB4	1-414-772-21	s FERRITE. EMI (SMD) (2012)
FB5	1-414-772-21	s FERRITE. EMI (SMD) (2012)
FB6	1-414-772-21	s FERRITE. EMI (SMD) (2012)

DPR-298 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc 3pcs	A-1707-918-A 3-729-061-02	s MOUNTED CIRCUIT BOARD, DPR-298 s SCREW (M2) (TYPE 1)
C1	1-164-842-81	s CAP,CHIP CERAMIC 2.0PF CK 1005
C2	1-164-842-81	s CAP,CHIP CERAMIC 2.0PF CK 1005
C3	1-164-842-81	s CAP,CHIP CERAMIC 2.0PF CK 1005
C4	1-164-842-81	s CAP,CHIP CERAMIC 2.0PF CK 1005
C5	1-164-842-81	s CAP,CHIP CERAMIC 2.0PF CK 1005
C6	1-164-842-81	s CAP,CHIP CERAMIC 2.0PF CK 1005
C51	1-112-298-91	o CAP, CERAMIC 1MF B (1608)
C52	1-112-298-91	o CAP, CERAMIC 1MF B (1608)
C53	1-112-298-91	o CAP, CERAMIC 1MF B (1608)
C54	1-112-298-91	o CAP, CERAMIC 1MF B (1608)
C55	1-165-875-91	s CAP, CHIP CERAMIC 10MF B 3216
C56	1-165-875-91	s CAP, CHIP CERAMIC 10MF B 3216
C57	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C59	1-112-298-91	o CAP, CERAMIC 1MF B (1608)
C60	1-112-298-91	o CAP, CERAMIC 1MF B (1608)
C61	1-112-298-91	o CAP, CERAMIC 1MF B (1608)
C62	1-112-298-91	o CAP, CERAMIC 1MF B (1608)
C63	1-100-055-21	s CAP, CHIP CERAMIC 22MF B 3225
C64	1-100-055-21	s CAP, CHIP CERAMIC 22MF B 3225
C65	1-100-055-21	s CAP, CHIP CERAMIC 22MF B 3225
C66	1-100-055-21	s CAP, CHIP CERAMIC 22MF B 3225
C69	1-164-874-81	s CAP,CHIP CERAMIC 100PF CH 1005
C70	1-164-874-81	s CAP,CHIP CERAMIC 100PF CH 1005
C71	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C72	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C73	1-164-874-81	s CAP,CHIP CERAMIC 100PF CH 1005
C74	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C80	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C82	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C83	1-112-298-91	o CAP, CERAMIC 1MF B (1608)
C84	1-112-298-91	o CAP, CERAMIC 1MF B (1608)
C85	1-112-298-91	o CAP, CERAMIC 1MF B (1608)
C86	1-112-298-91	o CAP, CERAMIC 1MF B (1608)
C87	1-165-875-91	s CAP, CHIP CERAMIC 10MF B 3216
C88	1-165-875-91	s CAP, CHIP CERAMIC 10MF B 3216
C89	1-100-881-91	s CAP, CERAMIC 47MF C (3216)
C90	1-114-548-11	s CAP, NIOBIUM ELECT 22UF
C93	1-114-548-11	s CAP, NIOBIUM ELECT 22UF
C94	1-100-881-91	s CAP, CERAMIC 47MF C (3216)
C95	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C96	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C97	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C98	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C99	1-164-936-81	s CAP, CHIP CERAMIC 680PF B 1005
C100	1-112-692-81	s CAP,CHIP CERAMIC1000PF CH 1005
C101	1-112-692-81	s CAP,CHIP CERAMIC1000PF CH 1005
C102	1-164-866-81	s CAP, CHIP CERAMIC 47PF CH 1005
C103	1-164-874-81	s CAP,CHIP CERAMIC 100PF CH 1005
C104	1-164-866-81	s CAP, CHIP CERAMIC 47PF CH 1005
C105	1-100-505-91	s CAP, CERAMIC 0.1MF C (1005)
C106	1-100-505-91	s CAP, CERAMIC 0.1MF C (1005)
C107	1-100-505-91	s CAP, CERAMIC 0.1MF C (1005)
C108	1-100-505-91	s CAP, CERAMIC 0.1MF C (1005)
C110	1-114-214-81	s CAP,CHIP CERAMIC470PF CH1005
C111	1-164-845-81	s CAP, CHIP CERAMIC 5PF CH 1005
C112	1-164-850-81	s CAP, CHIP CERAMIC 10PF CH 1005

(DPR-298 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C113	1-164-866-81 s	CAP, CHIP CERAMIC 47PF CH 1005
C114	1-164-850-81 s	CAP, CHIP CERAMIC 10PF CH 1005
C115	1-100-505-91 s	CAP, CERAMIC 0.1MF C (1005)
C116	1-165-875-91 s	CAP, CHIP CERAMIC 10MF B 3216
C118	1-165-875-91 s	CAP, CHIP CERAMIC 10MF B 3216
C119	1-165-875-91 s	CAP, CHIP CERAMIC 10MF B 3216
C120	1-165-875-91 s	CAP, CHIP CERAMIC 10MF B 3216
C122	1-100-055-21 s	CAP, CHIP CERAMIC 22MF B 3225
C123	1-100-055-21 s	CAP, CHIP CERAMIC 22MF B 3225
C124	1-100-055-21 s	CAP, CHIP CERAMIC 22MF B 3225
C125	1-164-936-81 s	CAP, CHIP CERAMIC 680PF B 1005
C126	1-164-936-81 s	CAP, CHIP CERAMIC 680PF B 1005
C127	1-164-936-81 s	CAP, CHIP CERAMIC 680PF B 1005
C128	1-165-875-91 s	CAP, CHIP CERAMIC 10MF B 3216
C129	1-165-875-91 s	CAP, CHIP CERAMIC 10MF B 3216
C130	1-165-875-91 s	CAP, CHIP CERAMIC 10MF B 3216
C131	1-100-881-91 s	CAP, CERAMIC 47MF C (3216)
C132	1-100-881-91 s	CAP, CERAMIC 47MF C (3216)
C133	1-100-881-91 s	CAP, CERAMIC 47MF C (3216)
C135	1-100-881-91 s	CAP, CERAMIC 47MF C (3216)
C137	1-100-055-21 s	CAP, CHIP CERAMIC 22MF B 3225
C138	1-100-055-21 s	CAP, CHIP CERAMIC 22MF B 3225
C139	1-100-055-21 s	CAP, CHIP CERAMIC 22MF B 3225
C140	1-100-055-21 s	CAP, CHIP CERAMIC 22MF B 3225
C141	1-100-055-21 s	CAP, CHIP CERAMIC 22MF B 3225
C142	1-100-055-21 s	CAP, CHIP CERAMIC 22MF B 3225
C143	1-100-505-91 s	CAP, CERAMIC 0.1MF C (1005)
C144	1-114-548-11 s	CAP, NIOBIUM ELECT 22UF
C145	1-100-505-91 s	CAP, CERAMIC 0.1MF C (1005)
C146	1-114-548-11 s	CAP, NIOBIUM ELECT 22UF
C147	1-100-505-91 s	CAP, CERAMIC 0.1MF C (1005)
C148	1-114-548-11 s	CAP, NIOBIUM ELECT 22UF
C149	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C150	1-114-548-11 s	CAP, NIOBIUM ELECT 22UF
C151	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C154	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C162	1-112-298-91 o	CAP, CERAMIC 1MF B (1608)
C163	1-112-298-91 o	CAP, CERAMIC 1MF B (1608)
C164	1-112-298-91 o	CAP, CERAMIC 1MF B (1608)
C166	1-114-548-11 s	CAP, NIOBIUM ELECT 22UF
C170	1-114-214-81 s	CAP,CHIP CERAMIC470PF CH1005
C171	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C172	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C173	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C174	1-112-298-91 o	CAP, CERAMIC 1MF B (1608)
C175	1-112-298-91 o	CAP, CERAMIC 1MF B (1608)
C176	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C177	1-112-298-91 o	CAP, CERAMIC 1MF B (1608)
C178	1-112-298-91 o	CAP, CERAMIC 1MF B (1608)
C181	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C182	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C183	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C184	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C185	1-164-850-81 s	CAP, CHIP CERAMIC 10PF CH 1005
C186	1-164-850-81 s	CAP, CHIP CERAMIC 10PF CH 1005
C187	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C188	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C189	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C190	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005

(DPR-298 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C191	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C192	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C193	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C194	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C195	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C196	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C197	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C198	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C199	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C201	1-100-159-91 s	CAP, CERAMIC 22MF B (SMD) 3216
C202	1-100-159-91 s	CAP, CERAMIC 22MF B (SMD) 3216
C203	1-100-159-91 s	CAP, CERAMIC 22MF B (SMD) 3216
C204	1-100-159-91 s	CAP, CERAMIC 22MF B (SMD) 3216
C205	1-100-159-91 s	CAP, CERAMIC 22MF B (SMD) 3216
C206	1-100-159-91 s	CAP, CERAMIC 22MF B (SMD) 3216
C207	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C208	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C209	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C210	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C211	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C212	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C213	1-112-298-91 o	CAP, CERAMIC 1MF B (1608)
C214	1-112-298-91 o	CAP, CERAMIC 1MF B (1608)
C215	1-112-298-91 o	CAP, CERAMIC 1MF B (1608)
C216	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C217	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C218	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C219	1-164-845-81 s	CAP, CHIP CERAMIC 5PF CH 1005
C220	1-164-845-81 s	CAP, CHIP CERAMIC 5PF CH 1005
C221	1-164-845-81 s	CAP, CHIP CERAMIC 5PF CH 1005
C222	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C223	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C224	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C225	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C226	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C227	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C228	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C229	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C230	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C231	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C232	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C233	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C234	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C235	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C236	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C237	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C238	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C239	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C240	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C241	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C242	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C243	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C244	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C245	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C246	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C247	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C248	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C249	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C250	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)

(DPR-298 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C410	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C411	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C412	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C413	1-100-881-91	s	CAP, CERAMIC 47MF C (3216)
C414	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C415	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C416	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C417	1-100-881-91	s	CAP, CERAMIC 47MF C (3216)
C418	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C419	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C420	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C421	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C422	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C423	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C424	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C425	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C426	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C427	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C428	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C429	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C430	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C431	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C432	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C433	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C434	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C435	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C501	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C502	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C503	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C504	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C505	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C506	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C507	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C551	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C552	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C553	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C554	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C555	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C556	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C557	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C558	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C559	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C560	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C561	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C562	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C563	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C564	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C565	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C566	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C567	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C568	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C569	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C570	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C571	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C572	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C573	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C574	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C575	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C576	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)

(DPR-298 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C577	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C578	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C579	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C580	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C581	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C582	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C583	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C584	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C585	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C586	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C587	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C588	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C589	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C590	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C591	1-100-159-91 s	CAP, CERAMIC 22MF B (SMD) 3216
C592	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C593	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C594	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C595	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C596	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C597	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C598	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C599	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C600	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C601	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C602	1-100-159-91 s	CAP, CERAMIC 22MF B (SMD) 3216
C603	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C604	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C605	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C606	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C607	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C608	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C609	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C610	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C611	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C612	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C613	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C614	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C615	1-100-566-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C616	1-100-566-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C617	1-100-566-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C618	1-100-566-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C619	1-100-566-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C620	1-100-566-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C621	1-100-055-21 s	CAP, CHIP CERAMIC 22MF B 3225
C622	1-100-055-21 s	CAP, CHIP CERAMIC 22MF B 3225
C623	1-127-956-21 s	CAP, CHIP FILM 0.1MF (3225)
C624	1-127-956-21 s	CAP, CHIP FILM 0.1MF (3225)
C625	1-114-549-11 s	CAP, NIOBIUM ELECT 47UF
C626	1-114-548-11 s	CAP, NIOBIUM ELECT 22UF
C627	1-114-549-11 s	CAP, NIOBIUM ELECT 47UF
C629	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C630	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C631	1-127-956-21 s	CAP, CHIP FILM 0.1MF (3225)
C632	1-127-956-21 s	CAP, CHIP FILM 0.1MF (3225)
C633	1-127-950-21 s	CAP, CHIP FILM 0.01MF (2012)
C634	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C635	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C636	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)

(DPR-298 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C637	1-127-950-21 s	CAP, CHIP FILM 0.01MF (2012)
C638	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C639	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C640	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C641	1-164-850-81 s	CAP, CHIP CERAMIC 10PF CH 1005
C642	1-164-850-81 s	CAP, CHIP CERAMIC 10PF CH 1005
C643	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C644	1-164-850-81 s	CAP, CHIP CERAMIC 10PF CH 1005
C645	1-164-850-81 s	CAP, CHIP CERAMIC 10PF CH 1005
C646	1-164-850-81 s	CAP, CHIP CERAMIC 10PF CH 1005
C647	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C648	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C649	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C650	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C656	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C657	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C658	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C659	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C660	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C661	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C662	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C663	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C664	1-112-300-91 s	CAP, CERAMIC 4.7MF B (2012)
C665	1-112-298-91 o	CAP, CERAMIC 1MF B (1608)
C666	1-100-055-21 s	CAP, CHIP CERAMIC 22MF B 3225
C667	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C668	1-112-298-91 o	CAP, CERAMIC 1MF B (1608)
C669	1-100-881-91 s	CAP, CERAMIC 47MF C (3216)
C670	1-100-566-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C671	1-100-566-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C672	1-100-159-91 s	CAP, CERAMIC 22MF B (SMD) 3216
C673	1-100-881-91 s	CAP, CERAMIC 47MF C (3216)
C674	1-164-850-81 s	CAP, CHIP CERAMIC 10PF CH 1005
C675	1-164-850-81 s	CAP, CHIP CERAMIC 10PF CH 1005
C701	1-112-298-91 o	CAP, CERAMIC 1MF B (1608)
C702	1-100-567-81 s	CAP, CHIP CERAMIC 0.01MF B 1005
C731	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C732	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C733	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C734	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C735	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C736	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C737	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C738	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C739	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C740	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C741	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C742	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C743	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C744	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C745	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C746	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C747	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C748	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C749	1-100-159-91 s	CAP, CERAMIC 22MF B (SMD) 3216
C750	1-100-159-91 s	CAP, CERAMIC 22MF B (SMD) 3216
C751	1-100-159-91 s	CAP, CERAMIC 22MF B (SMD) 3216
C752	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C753	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005

(DPR-298 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C754	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C755	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C756	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C757	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C758	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C759	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C760	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C761	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C762	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C763	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C764	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C765	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C766	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C767	1-164-843-81	s	CAP, CHIP CERAMIC 3PF CJ 1005
C768	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C769	1-164-843-81	s	CAP, CHIP CERAMIC 3PF CJ 1005
C770	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C771	1-164-843-81	s	CAP, CHIP CERAMIC 3PF CJ 1005
C772	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C773	1-164-852-81	s	CAP, CHIP CERAMIC 12PF CH 1005
C774	1-164-852-81	s	CAP, CHIP CERAMIC 12PF CH 1005
C775	1-164-852-81	s	CAP, CHIP CERAMIC 12PF CH 1005
C776	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C777	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C778	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C779	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C780	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C781	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C782	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C783	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C784	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C785	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C786	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C787	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C788	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C789	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C790	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C792	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C793	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C794	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C795	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C796	1-100-881-91	s	CAP, CERAMIC 47MF C (3216)
C797	1-100-881-91	s	CAP, CERAMIC 47MF C (3216)
C798	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C799	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C800	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C801	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C802	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C803	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C804	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C805	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C806	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C807	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C808	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C809	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C810	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C811	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C812	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C813	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005

(DPR-298 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C814	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C815	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C816	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C817	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C818	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C819	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C820	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C821	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C822	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C823	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C824	1-164-854-81	s	CAP, CHIP CERAMIC 15PF CH 1005
C826	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C827	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C828	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C829	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C830	1-100-881-91	s	CAP, CERAMIC 47MF C (3216)
C831	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C832	1-114-548-11	s	CAP, NIOBIUM ELECT 22UF
C833	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C834	1-100-507-91	s	CAP, CERAMIC 4.7MF C (1608)
C836	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C837	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C838	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C839	1-100-567-81	s	CAP, CHIP CERAMIC 0.01MF B 1005
C840	1-100-507-91	s	CAP, CERAMIC 4.7MF C (1608)
C841	1-100-507-91	s	CAP, CERAMIC 4.7MF C (1608)
C845	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C847	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C849	1-100-507-91	s	CAP, CERAMIC 4.7MF C (1608)
C850	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C859	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C864	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C868	1-112-300-91	s	CAP, CERAMIC 4.7MF B (2012)
C869	1-112-300-91	s	CAP, CERAMIC 4.7MF B (2012)
C870	1-114-548-11	s	CAP, NIOBIUM ELECT 22UF
C871	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C872	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C873	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C874	1-100-567-81	s	CAP, CHIP CERAMIC 0.01MF B 1005
C875	1-100-567-81	s	CAP, CHIP CERAMIC 0.01MF B 1005
C876	1-100-567-81	s	CAP, CHIP CERAMIC 0.01MF B 1005
C877	1-100-567-81	s	CAP, CHIP CERAMIC 0.01MF B 1005
C878	1-100-567-81	s	CAP, CHIP CERAMIC 0.01MF B 1005
C879	1-100-567-81	s	CAP, CHIP CERAMIC 0.01MF B 1005
C903	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C904	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C905	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C906	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C907	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C908	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C909	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C910	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C911	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C912	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C913	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C914	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C915	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C916	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C917	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(DPR-298 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C918	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C919	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C920	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C921	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C922	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C923	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C924	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C925	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C926	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C927	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C928	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C929	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C930	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C931	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C932	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C933	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C934	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C935	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C936	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C937	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C938	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C939	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C940	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C941	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C942	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C943	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C944	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C945	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C946	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C947	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C948	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C949	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C950	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C951	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C952	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C953	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C954	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C955	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C956	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C957	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C958	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C959	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C960	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C961	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C962	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C963	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C964	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C965	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C966	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C967	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C968	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C969	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C970	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C971	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C972	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C973	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C974	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C975	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C976	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005

(DPR-298 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C977	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C978	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C979	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C980	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C981	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C982	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C983	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C984	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C985	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C986	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C987	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C988	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C989	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C990	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C991	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C992	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C993	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C994	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C995	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C996	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C997	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
CN1	1-774-261-31 s	CONNECTOR, FFC/FPC(ZIF) AN 24P
CN801	1-764-243-31 o	CONNECTOR (COAXIAL)
CN901	1-770-627-21 s	PIN, CONNECTOR 10P
D101	8-719-074-31 s	DIODE CL-196YG-CD-T
D102	8-719-083-60 s	DI UDZSUSTE-174.7B
D103	8-719-083-60 s	DI UDZSUSTE-174.7B
D104	8-719-989-01 s	DIODE DA221-TL
D105	8-719-989-01 s	DIODE DA221-TL
D401	8-719-074-31 s	DIODE CL-196YG-CD-T
D501	8-719-989-01 s	DIODE DA221-TL
D502	8-719-989-01 s	DIODE DA221-TL
D601	8-719-989-01 s	DIODE DA221-TL
D602	8-719-989-01 s	DIODE DA221-TL
D603	8-719-989-01 s	DIODE DA221-TL
D604	8-719-989-01 s	DIODE DA221-TL
D605	8-719-989-01 s	DIODE DA221-TL
D606	8-719-989-01 s	DIODE DA221-TL
E1	1-535-877-22 s	CHIP, CHECKER
E2	1-535-877-22 s	CHIP, CHECKER
E3	1-535-877-22 s	CHIP, CHECKER
E4	1-535-877-22 s	CHIP, CHECKER
FB102	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB103	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB104	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB105	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB106	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB107	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB108	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB109	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB110	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB111	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB112	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB113	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB114	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB115	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB116	1-469-094-21 s	FERRITE, EMI (SMD) (1608)

(DPR-298 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
FB117	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB118	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB119	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB401	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB402	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB403	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB404	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB601	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB602	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB603	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB802	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB803	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB804	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB805	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB806	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB807	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB808	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB811	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB901	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB902	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB903	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB904	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB905	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB906	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB907	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB908	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB909	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB910	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB911	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB912	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB913	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB914	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB915	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB916	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FL201	1-813-542-11	s	FILTER, LOW PASS
FL202	1-813-542-11	s	FILTER, LOW PASS
FL203	1-813-542-11	s	FILTER, LOW PASS
IC101	8-759-327-01	s	IC NJM062V (TE2)
IC102	6-712-135-01	o	IC R1173H001D-T1-F
IC103	6-712-135-01	o	IC R1173H001D-T1-F
IC104	6-704-976-01	s	IC ADR381ARTZ-REEL7
IC105	6-706-220-01	s	IC LTC3411EMS#TR
IC106	6-706-136-01	s	IC LTC3412EFE#TR
IC107	6-706-220-01	s	IC LTC3411EMS#TR
IC108	8-759-592-42	s	IC TC7SZ00FU (TE85R)
IC109	8-759-592-42	s	IC TC7SZ00FU (TE85R)
IC110	8-759-675-54	s	IC TC7W53FK (TE85R)
IC111	8-759-346-27	s	IC LM45BIM3X
IC112	6-712-135-01	o	IC R1173H001D-T1-F
IC181	6-706-487-01	s	IC TC7SH08FU (T5RSOYJF)
IC182	6-706-487-01	s	IC TC7SH08FU (T5RSOYJF)
IC183	6-706-487-01	s	IC TC7SH08FU (T5RSOYJF)
IC184	6-706-487-01	s	IC TC7SH08FU (T5RSOYJF)
IC185	8-759-392-77	s	IC SN74LVC245APWR
IC186	8-759-392-77	s	IC SN74LVC245APWR
IC187	8-759-392-77	s	IC SN74LVC245APWR
IC188	8-759-392-77	s	IC SN74LVC245APWR
IC189	8-759-392-77	s	IC SN74LVC245APWR

(DPR-298 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC190	8-759-669-42	s	IC SN74LVC138APWR-12
IC201	6-706-863-01	s	IC LMH6732MFX/NOPB
IC202	6-706-863-01	s	IC LMH6732MFX/NOPB
IC203	6-706-863-01	s	IC LMH6732MFX/NOPB
IC204	6-713-965-01	s	IC LTC6406CUD#TR
IC205	6-713-965-01	s	IC LTC6406CUD#TR
IC206	6-713-965-01	s	IC LTC6406CUD#TR
IC207	6-708-675-01	s	IC LTC2249IUH#TR
IC208	6-708-675-01	s	IC LTC2249IUH#TR
IC209	6-708-675-01	s	IC LTC2249IUH#TR
IC210	8-759-675-54	s	IC TC7W53FK (TE85R)
IC211	8-759-675-54	s	IC TC7W53FK (TE85R)
IC212	8-759-675-54	s	IC TC7W53FK (TE85R)
IC213	8-759-327-01	s	IC NJM062V (TE2)
IC214	8-759-327-01	s	IC NJM062V (TE2)
IC215	6-707-884-01	s	IC TC74VHCT04APT (EKJ)
IC216	6-706-487-01	s	IC TC7SH08FU (T5RSOYJF)
IC304	6-700-804-01	s	IC SN74LVC574APWR
IC502	8-759-592-42	s	IC TC7SZ00FU (TE85R)
IC503	8-759-592-42	s	IC TC7SZ00FU (TE85R)
IC504	6-700-804-01	s	IC SN74LVC574APWR
IC505	6-700-804-01	s	IC SN74LVC574APWR
IC506	6-700-804-01	s	IC SN74LVC574APWR
IC507	8-759-675-54	s	IC TC7W53FK (TE85R)
IC508	8-759-675-54	s	IC TC7W53FK (TE85R)
IC601	8-759-592-42	s	IC TC7SZ00FU (TE85R)
IC602	8-759-592-42	s	IC TC7SZ00FU (TE85R)
IC603	8-759-592-42	s	IC TC7SZ00FU (TE85R)
IC604	8-759-592-42	s	IC TC7SZ00FU (TE85R)
IC605	8-759-592-42	s	IC TC7SZ00FU (TE85R)
IC606	8-759-592-42	s	IC TC7SZ00FU (TE85R)
IC607	8-759-592-42	s	IC TC7SZ00FU (TE85R)
IC608	8-759-276-25	s	IC TLC272CPSR
IC609	6-706-478-01	s	IC TC7SET08FU (T5RSOJF)
IC610	6-706-478-01	s	IC TC7SET08FU (T5RSOJF)
IC611	6-706-478-01	s	IC TC7SET08FU (T5RSOJF)
IC612	6-706-478-01	s	IC TC7SET08FU (T5RSOJF)
IC613	6-712-190-01	s	IC W9864G2GH-6-ER10 (T&R)
IC614	6-712-190-01	s	IC W9864G2GH-6-ER10 (T&R)
IC615	6-706-487-01	s	IC TC7SH08FU (T5RSOYJF)
IC616	6-706-487-01	s	IC TC7SH08FU (T5RSOYJF)
IC617	8-759-485-24	s	IC MC74HC4046ADTR2
IC618	8-759-485-24	s	IC MC74HC4046ADTR2
IC619	8-759-675-54	s	IC TC7W53FK (TE85R)
IC620	8-759-675-54	s	IC TC7W53FK (TE85R)
IC621	8-759-675-54	s	IC TC7W53FK (TE85R)
IC622	6-702-787-01	s	IC UPD6467GR-525-E2
IC623	6-702-787-01	s	IC UPD6467GR-525-E2
IC624	8-759-675-47	s	IC SN74LVC04APWR
IC625	8-759-675-47	s	IC SN74LVC04APWR
IC626	6-712-135-01	o	IC R1173H001D-T1-F
IC702	8-759-672-76	s	IC AK9813BF-E2
IC801	8-752-391-99	s	IC CXD2315Q-T4
IC802	8-752-391-99	s	IC CXD2315Q-T4
IC803	8-752-391-99	s	IC CXD2315Q-T4
IC804	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC805	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC806	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC807	6-706-471-01	s	IC THS5661AIPWR

(DPR-298 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
IC808	6-708-506-01	s IC ML86V7666TBZ03A
IC809	6-706-863-01	s IC LMH6732MFX/NOBP
IC812	6-706-482-01	s IC TC7SH00FU(T5RSOYJF)
IC813	6-712-135-01	o IC R1173H001D-T1-F
IC901	8-759-669-41	s IC SN74LVC125APWR-12
IC902	8-759-669-41	s IC SN74LVC125APWR-12
IC904	8-759-392-77	s IC SN74LVC245APWR
IC905	6-709-765-01	s IC EPCS4SI8N(15)
IC906	6-709-765-01	s IC EPCS4SI8N(15)
IC909	6-706-487-01	s IC TC7SH08FU(T5RSOYJF)
IC910	6-706-487-01	s IC TC7SH08FU(T5RSOYJF)
IC911	6-706-487-01	s IC TC7SH08FU(T5RSOYJF)
IC912	6-706-487-01	s IC TC7SH08FU(T5RSOYJF)
IC913	6-706-487-01	s IC TC7SH08FU(T5RSOYJF)
L101	1-414-392-41	s INDUCTOR (SMD) 1.0UH
L104	1-414-398-41	s INDUCTOR (SMD) 10.0UH
L105	1-414-392-41	s INDUCTOR (SMD) 1.0UH
L106	1-414-398-41	s INDUCTOR (SMD) 10.0UH
L107	1-414-392-41	s INDUCTOR (SMD) 1.0UH
L108	1-414-398-41	s INDUCTOR (SMD) 10.0UH
L109	1-419-630-21	s COIL, CHOKE 4.7UH
L110	1-457-372-21	s COIL, CHOKE 1UH
L111	1-419-630-21	s COIL, CHOKE 4.7UH
L114	1-414-398-41	s INDUCTOR (SMD) 10.0UH
L115	1-414-398-41	s INDUCTOR (SMD) 10.0UH
L201	1-414-398-41	s INDUCTOR (SMD) 10.0UH
L202	1-414-398-41	s INDUCTOR (SMD) 10.0UH
L203	1-414-398-41	s INDUCTOR (SMD) 10.0UH
L204	1-414-398-41	s INDUCTOR (SMD) 10.0UH
L205	1-414-398-41	s INDUCTOR (SMD) 10.0UH
L206	1-414-398-41	s INDUCTOR (SMD) 10.0UH
L207	1-414-398-41	s INDUCTOR (SMD) 10.0UH
L208	1-414-398-41	s INDUCTOR (SMD) 10.0UH
L209	1-414-398-41	s INDUCTOR (SMD) 10.0UH
L210	1-414-398-41	s INDUCTOR (SMD) 10.0UH
L211	1-414-398-41	s INDUCTOR (SMD) 10.0UH
L601	1-414-392-41	s INDUCTOR (SMD) 1.0UH
L602	1-414-392-41	s INDUCTOR (SMD) 1.0UH
L603	1-414-392-41	s INDUCTOR (SMD) 1.0UH
L604	1-414-392-41	s INDUCTOR (SMD) 1.0UH
L605	1-414-392-41	s INDUCTOR (SMD) 1.0UH
L606	1-414-392-41	s INDUCTOR (SMD) 1.0UH
L608	1-414-398-41	s INDUCTOR (SMD) 10.0UH
L609	1-414-398-41	s INDUCTOR (SMD) 10.0UH
L610	1-414-398-41	s INDUCTOR (SMD) 10.0UH
L611	1-414-398-41	s INDUCTOR (SMD) 10.0UH
L612	1-414-398-41	s INDUCTOR (SMD) 10.0UH
L613	1-414-398-41	s INDUCTOR (SMD) 10.0UH
L614	1-414-398-41	s INDUCTOR (SMD) 10.0UH
L615	1-414-398-41	s INDUCTOR (SMD) 10.0UH
L616	1-414-392-41	s INDUCTOR (SMD) 1.0UH
L617	1-414-392-41	s INDUCTOR (SMD) 1.0UH
L618	1-414-398-41	s INDUCTOR (SMD) 10.0UH
L619	1-414-398-41	s INDUCTOR (SMD) 10.0UH
L801	1-414-398-41	s INDUCTOR (SMD) 10.0UH
L802	1-414-398-41	s INDUCTOR (SMD) 10.0UH
L803	1-414-398-41	s INDUCTOR (SMD) 10.0UH
L804	1-414-398-41	s INDUCTOR (SMD) 10.0UH
L805	1-414-398-41	s INDUCTOR (SMD) 10.0UH

(DPR-298 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
L806	1-414-398-41	s INDUCTOR (SMD) 10.0UH
L807	1-412-939-21	s INDUCTOR 1.0UH (2520)
L808	1-412-939-21	s INDUCTOR 1.0UH (2520)
L809	1-412-939-21	s INDUCTOR 1.0UH (2520)
L810	1-414-398-41	s INDUCTOR (SMD) 10.0UH
L811	1-414-398-41	s INDUCTOR (SMD) 10.0UH
L812	1-414-398-41	s INDUCTOR (SMD) 10.0UH
L813	1-414-398-41	s INDUCTOR (SMD) 10.0UH
L814	1-414-398-41	s INDUCTOR (SMD) 10.0UH
L815	1-414-398-41	s INDUCTOR (SMD) 10.0UH
L816	1-414-398-41	s INDUCTOR (SMD) 10.0UH
L817	1-414-398-41	s INDUCTOR (SMD) 10.0UH
L818	1-414-398-41	s INDUCTOR (SMD) 10.0UH
L819	1-414-398-41	s INDUCTOR (SMD) 10.0UH
L820	1-414-398-41	s INDUCTOR (SMD) 10.0UH
L821	1-412-947-21	s INDUCTOR 4.7UH (2520)
L822	1-414-398-41	s INDUCTOR (SMD) 10.0UH
L823	1-414-398-41	s INDUCTOR (SMD) 10.0UH
L824	1-414-398-41	s INDUCTOR (SMD) 10.0UH
L825	1-414-457-21	s INDUCTOR, CHIP (S) 3.3NH
L826	1-414-457-21	s INDUCTOR, CHIP (S) 3.3NH
L827	1-414-392-41	s INDUCTOR (SMD) 1.0UH
Q104	6-550-631-01	s TRANSISTOR 2SA1797-T100-Q
Q105	6-550-632-01	s TRANSISTOR 2SC4672-T100-Q
Q106	8-729-928-05	s TRANSISTOR 2SC4617TL-QR
Q107	8-729-928-05	s TRANSISTOR 2SC4617TL-QR
Q108	8-729-928-25	s TRANSISTOR 2SA1774TL-QR
Q111	8-729-928-05	s TRANSISTOR 2SC4617TL-QR
Q112	8-729-928-05	s TRANSISTOR 2SC4617TL-QR
Q113	8-729-928-05	s TRANSISTOR 2SC4617TL-QR
Q114	8-729-928-05	s TRANSISTOR 2SC4617TL-QR
Q401	8-729-928-25	s TRANSISTOR 2SA1774TL-QR
Q402	8-729-928-05	s TRANSISTOR 2SC4617TL-QR
Q601	8-729-928-82	s TRANSISTOR DTC144EE-TL
Q602	8-729-928-82	s TRANSISTOR DTC144EE-TL
Q603	8-729-928-82	s TRANSISTOR DTC144EE-TL
Q604	8-729-928-25	s TRANSISTOR 2SA1774TL-QR
Q605	8-729-928-25	s TRANSISTOR 2SA1774TL-QR
Q606	8-729-928-25	s TRANSISTOR 2SA1774TL-QR
Q607	8-729-928-25	s TRANSISTOR 2SA1774TL-QR
Q805	8-729-928-82	s TRANSISTOR DTC144EE-TL
Q806	8-729-928-05	s TRANSISTOR 2SC4617TL-QR
R52	1-242-967-81	s RES, CHIP 1.0 (1005)
R53	1-242-967-81	s RES, CHIP 1.0 (1005)
R54	1-242-967-81	s RES, CHIP 1.0 (1005)
R55	1-242-967-81	s RES, CHIP 1.0 (1005)
R56	1-242-967-81	s RES, CHIP 1.0 (1005)
R57	1-242-967-81	s RES, CHIP 1.0 (1005)
R58	1-242-967-81	s RES, CHIP 1.0 (1005)
R59	1-242-967-81	s RES, CHIP 1.0 (1005)
R64	1-218-990-81	s CONDUCTOR, CHIP (1005)
R65	1-208-863-81	s RES, CHIP 100 (1005)
R66	1-208-871-81	s RES, CHIP 220 (1005)
R67	1-208-871-81	s RES, CHIP 220 (1005)
R68	1-208-927-81	s RES, CHIP 47K (1005)
R69	1-208-927-81	s RES, CHIP 47K (1005)
R70	1-208-919-81	s RES, CHIP 22K (1005)
R71	1-208-919-81	s RES, CHIP 22K (1005)

(DPR-298 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R72	1-208-919-81	s RES, CHIP 22K (1005)
R73	1-208-919-81	s RES, CHIP 22K (1005)
R74	1-208-911-81	s RES, CHIP 10K (1005)
R75	1-208-927-81	s RES, CHIP 47K (1005)
R77	1-208-927-81	s RES, CHIP 47K (1005)
R78	1-208-927-81	s RES, CHIP 47K (1005)
R79	1-208-919-81	s RES, CHIP 22K (1005)
R80	1-208-911-81	s RES, CHIP 10K (1005)
R81	1-208-863-81	s RES, CHIP 100 (1005)
R85	1-208-911-81	s RES, CHIP 10K (1005)
R86	1-208-919-81	s RES, CHIP 22K (1005)
R87	1-208-911-81	s RES, CHIP 10K (1005)
R88	1-208-919-81	s RES, CHIP 22K (1005)
R90	1-208-919-81	s RES, CHIP 22K (1005)
R91	1-208-919-81	s RES, CHIP 22K (1005)
R92	1-208-919-81	s RES, CHIP 22K (1005)
R94	1-208-919-81	s RES, CHIP 22K (1005)
R96	1-208-863-81	s RES, CHIP 100 (1005)
R98	1-208-863-81	s RES, CHIP 100 (1005)
R99	1-208-863-81	s RES, CHIP 100 (1005)
R100	1-208-883-81	s RES, CHIP 680 (1005)
R101	1-208-911-81	s RES, CHIP 10K (1005)
R102	1-208-931-81	s RES, CHIP 68K (1005)
R103	1-208-863-81	s RES, CHIP 100 (1005)
R104	1-243-975-81	s RES, CHIP 4.7M (1005)
R105	1-208-919-81	s RES, CHIP 22K (1005)
R106	1-208-935-81	s RES, CHIP 100K (1005)
R107	1-208-919-81	s RES, CHIP 22K (1005)
R108	1-243-975-81	s RES, CHIP 4.7M (1005)
R109	1-243-975-81	s RES, CHIP 4.7M (1005)
R111	1-208-919-81	s RES, CHIP 22K (1005)
R112	1-208-911-81	s RES, CHIP 10K (1005)
R113	1-243-975-81	s RES, CHIP 4.7M (1005)
R115	1-208-943-81	s RES, CHIP 220K (1005)
R116	1-208-943-81	s RES, CHIP 220K (1005)
R117	1-208-943-81	s RES, CHIP 220K (1005)
R118	1-218-990-81	s CONDUCTOR, CHIP (1005)
R119	1-208-911-81	s RES, CHIP 10K (1005)
R120	1-218-990-81	s CONDUCTOR, CHIP (1005)
R121	1-208-887-81	s RES, CHIP 1.0K (1005)
R122	1-208-863-81	s RES, CHIP 100 (1005)
R123	1-208-863-81	s RES, CHIP 100 (1005)
R124	1-208-927-81	s RES, CHIP 47K (1005)
R125	1-208-911-81	s RES, CHIP 10K (1005)
R126	1-208-911-81	s RES, CHIP 10K (1005)
R127	1-208-887-81	s RES, CHIP 1.0K (1005)
R129	1-208-887-81	s RES, CHIP 1.0K (1005)
R131	1-220-230-91	s RES,SQUARE TYPE CHIP 2.2(3225)
R132	1-220-230-91	s RES,SQUARE TYPE CHIP 2.2(3225)
R133	1-220-230-91	s RES,SQUARE TYPE CHIP 2.2(3225)
R134	1-218-973-81	s RES, CHIP 47K
R135	1-208-931-81	s RES, CHIP 68K (1005)
R136	1-218-965-81	s RES, CHIP 10K 1005
R137	1-218-990-81	s CONDUCTOR, CHIP (1005)
R139	1-218-965-81	s RES, CHIP 10K 1005
R140	1-218-965-81	s RES, CHIP 10K 1005
R141	1-208-911-81	s RES, CHIP 10K (1005)
R144	1-208-919-81	s RES, CHIP 22K (1005)
R147	1-218-941-81	s RES, CHIP 100

(DPR-298 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R152	1-208-863-81	s RES, CHIP 100 (1005)
R153	1-208-919-81	s RES, CHIP 22K (1005)
R154	1-208-895-81	s RES, CHIP 2.2K (1005)
R155	1-218-941-81	s RES, CHIP 100
R156	1-208-903-81	s RES, CHIP 4.7K (1005)
R157	1-208-891-81	s RES, CHIP 1.5K (1005)
R158	1-218-973-81	s RES, CHIP 47K
R159	1-216-805-91	s RES, CHIP 47 (1608)
R160	1-216-805-91	s RES, CHIP 47 (1608)
R161	1-216-805-91	s RES, CHIP 47 (1608)
R162	1-208-891-81	s RES, CHIP 1.5K (1005)
R163	1-218-973-81	s RES, CHIP 47K
R164	1-216-805-91	s RES, CHIP 47 (1608)
R165	1-216-805-91	s RES, CHIP 47 (1608)
R166	1-216-805-91	s RES, CHIP 47 (1608)
R167	1-211-899-91	s RES,SQUARE TYPE CHIP 0.22 3225
R168	1-211-899-91	s RES,SQUARE TYPE CHIP 0.22 3225
R181	1-208-863-81	s RES, CHIP 100 (1005)
R182	1-208-927-81	s RES, CHIP 47K (1005)
R183	1-208-863-81	s RES, CHIP 100 (1005)
R184	1-208-863-81	s RES, CHIP 100 (1005)
R185	1-208-863-81	s RES, CHIP 100 (1005)
R186	1-218-937-81	s RES, CHIP 47
R187	1-218-937-81	s RES, CHIP 47
R188	1-218-937-81	s RES, CHIP 47
R189	1-218-937-81	s RES, CHIP 47
R190	1-208-855-81	s RES, CHIP 47 (1005)
R191	1-208-887-81	s RES, CHIP 1.0K (1005)
R192	1-208-887-81	s RES, CHIP 1.0K (1005)
R193	1-218-937-81	s RES, CHIP 47
R194	1-208-863-81	s RES, CHIP 100 (1005)
R195	1-218-941-81	s RES, CHIP 100
R196	1-218-973-81	s RES, CHIP 47K
R197	1-208-927-81	s RES, CHIP 47K (1005)
R198	1-245-242-81	s RES, CHIP 1.5M (1005)
R199	1-208-855-81	s RES, CHIP 47 (1005)
R200	1-245-242-81	s RES, CHIP 1.5M (1005)
R204	1-208-883-81	s RES, CHIP 680 (1005)
R205	1-208-883-81	s RES, CHIP 680 (1005)
R206	1-208-883-81	s RES, CHIP 680 (1005)
R207	1-218-965-81	s RES, CHIP 10K 1005
R208	1-208-919-81	s RES, CHIP 22K (1005)
R209	1-218-965-81	s RES, CHIP 10K 1005
R210	1-208-919-81	s RES, CHIP 22K (1005)
R211	1-218-965-81	s RES, CHIP 10K 1005
R212	1-208-919-81	s RES, CHIP 22K (1005)
R213	1-208-883-81	s RES, CHIP 680 (1005)
R214	1-208-883-81	s RES, CHIP 680 (1005)
R215	1-208-883-81	s RES, CHIP 680 (1005)
R216	1-218-973-81	s RES, CHIP 47K
R217	1-208-905-81	s RES, CHIP 5.6K (1005)
R218	1-218-973-81	s RES, CHIP 47K
R219	1-208-905-81	s RES, CHIP 5.6K (1005)
R220	1-218-973-81	s RES, CHIP 47K
R221	1-208-905-81	s RES, CHIP 5.6K (1005)
R222	1-218-937-81	s RES, CHIP 47
R223	1-218-937-81	s RES, CHIP 47
R224	1-218-937-81	s RES, CHIP 47
R225	1-208-895-81	s RES, CHIP 2.2K (1005)

(DPR-298 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R226	1-208-895-81	s RES, CHIP 2.2K (1005)
R227	1-208-895-81	s RES, CHIP 2.2K (1005)
R228	1-208-885-81	s RES, CHIP 820 (1005)
R229	1-218-977-81	s RES, CHIP 100K
R230	1-208-885-81	s RES, CHIP 820 (1005)
R231	1-218-977-81	s RES, CHIP 100K
R232	1-208-885-81	s RES, CHIP 820 (1005)
R233	1-218-977-81	s RES, CHIP 100K
R234	1-208-875-81	s RES, CHIP 330 (1005)
R235	1-208-875-81	s RES, CHIP 330 (1005)
R236	1-208-875-81	s RES, CHIP 330 (1005)
R237	1-218-961-81	s RES, CHIP 4.7K
R238	1-218-961-81	s RES, CHIP 4.7K
R239	1-218-961-81	s RES, CHIP 4.7K
R240	1-208-883-81	s RES, CHIP 680 (1005)
R241	1-245-242-81	s RES, CHIP 1.5M (1005)
R242	1-208-883-81	s RES, CHIP 680 (1005)
R243	1-245-242-81	s RES, CHIP 1.5M (1005)
R244	1-208-883-81	s RES, CHIP 680 (1005)
R245	1-245-242-81	s RES, CHIP 1.5M (1005)
R246	1-218-953-81	s RES, CHIP 1.0K
R247	1-218-953-81	s RES, CHIP 1.0K
R248	1-218-953-81	s RES, CHIP 1.0K
R249	1-208-879-81	s RES, CHIP 470 (1005)
R250	1-208-879-81	s RES, CHIP 470 (1005)
R251	1-208-879-81	s RES, CHIP 470 (1005)
R252	1-208-879-81	s RES, CHIP 470 (1005)
R253	1-208-879-81	s RES, CHIP 470 (1005)
R254	1-208-879-81	s RES, CHIP 470 (1005)
R255	1-208-875-81	s RES, CHIP 330 (1005)
R256	1-208-875-81	s RES, CHIP 330 (1005)
R257	1-208-875-81	s RES, CHIP 330 (1005)
R258	1-208-875-81	s RES, CHIP 330 (1005)
R259	1-208-875-81	s RES, CHIP 330 (1005)
R260	1-208-875-81	s RES, CHIP 330 (1005)
R261	1-220-882-81	s RES, CHIP 33 (1005)
R262	1-220-882-81	s RES, CHIP 33 (1005)
R263	1-220-882-81	s RES, CHIP 33 (1005)
R264	1-220-882-81	s RES, CHIP 33 (1005)
R265	1-220-882-81	s RES, CHIP 33 (1005)
R266	1-220-882-81	s RES, CHIP 33 (1005)
R267	1-218-941-81	s RES, CHIP 100
R268	1-218-941-81	s RES, CHIP 100
R269	1-218-941-81	s RES, CHIP 100
R270	1-218-941-81	s RES, CHIP 100
R271	1-218-953-81	s RES, CHIP 1.0K
R272	1-218-941-81	s RES, CHIP 100
R273	1-218-953-81	s RES, CHIP 1.0K
R274	1-218-941-81	s RES, CHIP 100
R275	1-218-953-81	s RES, CHIP 1.0K
R276	1-218-941-81	s RES, CHIP 100
R277	1-218-941-81	s RES, CHIP 100
R278	1-218-941-81	s RES, CHIP 100
R279	1-218-941-81	s RES, CHIP 100
R280	1-218-941-81	s RES, CHIP 100
R281	1-218-941-81	s RES, CHIP 100
R282	1-218-990-81	s CONDUCTOR, CHIP (1005)
R283	1-218-990-81	s CONDUCTOR, CHIP (1005)
R284	1-218-990-81	s CONDUCTOR, CHIP (1005)

(DPR-298 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R285	1-218-965-81	s RES, CHIP 10K 1005
R286	1-218-965-81	s RES, CHIP 10K 1005
R287	1-218-965-81	s RES, CHIP 10K 1005
R288	1-218-965-81	s RES, CHIP 10K 1005
R289	1-218-965-81	s RES, CHIP 10K 1005
R290	1-218-965-81	s RES, CHIP 10K 1005
R291	1-218-965-81	s RES, CHIP 10K 1005
R292	1-218-965-81	s RES, CHIP 10K 1005
R293	1-218-965-81	s RES, CHIP 10K 1005
R294	1-218-941-81	s RES, CHIP 100
R295	1-218-941-81	s RES, CHIP 100
R296	1-218-941-81	s RES, CHIP 100
R297	1-218-941-81	s RES, CHIP 100
R298	1-218-941-81	s RES, CHIP 100
R299	1-218-941-81	s RES, CHIP 100
R300	1-245-242-81	s RES, CHIP 1.5M (1005)
R301	1-218-941-81	s RES, CHIP 100
R302	1-218-941-81	s RES, CHIP 100
R303	1-208-863-81	s RES, CHIP 100 (1005)
R306	1-218-941-81	s RES, CHIP 100
R307	1-218-941-81	s RES, CHIP 100
R308	1-218-941-81	s RES, CHIP 100
R311	1-218-941-81	s RES, CHIP 100
R312	1-218-941-81	s RES, CHIP 100
R313	1-218-941-81	s RES, CHIP 100
R314	1-218-941-81	s RES, CHIP 100
R319	1-218-941-81	s RES, CHIP 100
R320	1-218-941-81	s RES, CHIP 100
R321	1-218-941-81	s RES, CHIP 100
R326	1-218-941-81	s RES, CHIP 100
R327	1-218-941-81	s RES, CHIP 100
R328	1-218-941-81	s RES, CHIP 100
R333	1-218-941-81	s RES, CHIP 100
R334	1-218-941-81	s RES, CHIP 100
R335	1-218-941-81	s RES, CHIP 100
R401	1-208-855-81	s RES, CHIP 47 (1005)
R402	1-208-871-81	s RES, CHIP 220 (1005)
R403	1-208-855-81	s RES, CHIP 47 (1005)
R404	1-208-871-81	s RES, CHIP 220 (1005)
R405	1-208-855-81	s RES, CHIP 47 (1005)
R406	1-208-871-81	s RES, CHIP 220 (1005)
R407	1-218-937-81	s RES, CHIP 47
R408	1-218-941-81	s RES, CHIP 100
R409	1-218-941-81	s RES, CHIP 100
R410	1-218-941-81	s RES, CHIP 100
R411	1-218-941-81	s RES, CHIP 100
R413	1-208-871-81	s RES, CHIP 220 (1005)
R414	1-218-941-81	s RES, CHIP 100
R415	1-218-941-81	s RES, CHIP 100
R416	1-218-941-81	s RES, CHIP 100
R417	1-218-965-81	s RES, CHIP 10K 1005
R418	1-218-965-81	s RES, CHIP 10K 1005
R419	1-218-965-81	s RES, CHIP 10K 1005
R420	1-218-965-81	s RES, CHIP 10K 1005
R421	1-218-990-81	s CONDUCTOR, CHIP (1005)
R422	1-208-855-81	s RES, CHIP 47 (1005)
R423	1-208-855-81	s RES, CHIP 47 (1005)
R424	1-208-855-81	s RES, CHIP 47 (1005)
R425	1-208-855-81	s RES, CHIP 47 (1005)

(DPR-298 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R426	1-208-855-81	s RES, CHIP 47 (1005)
R427	1-208-911-81	s RES, CHIP 10K (1005)
R428	1-208-911-81	s RES, CHIP 10K (1005)
R429	1-218-953-81	s RES, CHIP 1.0K
R431	1-218-965-81	s RES, CHIP 10K 1005
R433	1-218-965-81	s RES, CHIP 10K 1005
R434	1-208-863-81	s RES, CHIP 100 (1005)
R435	1-208-855-81	s RES, CHIP 47 (1005)
R436	1-208-855-81	s RES, CHIP 47 (1005)
R437	1-208-871-81	s RES, CHIP 220 (1005)
R501	1-208-863-81	s RES, CHIP 100 (1005)
R502	1-208-911-81	s RES, CHIP 10K (1005)
R503	1-208-911-81	s RES, CHIP 10K (1005)
R504	1-208-863-81	s RES, CHIP 100 (1005)
R505	1-208-863-81	s RES, CHIP 100 (1005)
R506	1-208-863-81	s RES, CHIP 100 (1005)
R507	1-220-878-81	s RES, CHIP 22 (1005)
R508	1-218-941-81	s RES, CHIP 100
R509	1-218-941-81	s RES, CHIP 100
R510	1-218-941-81	s RES, CHIP 100
R511	1-218-941-81	s RES, CHIP 100
R512	1-218-941-81	s RES, CHIP 100
R517	1-208-871-81	s RES, CHIP 220 (1005)
R518	1-218-941-81	s RES, CHIP 100
R519	1-218-941-81	s RES, CHIP 100
R520	1-218-945-81	s RES, CHIP 220
R521	1-218-945-81	s RES, CHIP 220
R522	1-208-871-81	s RES, CHIP 220 (1005)
R523	1-218-945-81	s RES, CHIP 220
R524	1-218-941-81	s RES, CHIP 100
R525	1-208-927-81	s RES, CHIP 47K (1005)
R526	1-208-871-81	s RES, CHIP 220 (1005)
R527	1-218-941-81	s RES, CHIP 100
R528	1-208-863-81	s RES, CHIP 100 (1005)
R529	1-208-863-81	s RES, CHIP 100 (1005)
R530	1-208-863-81	s RES, CHIP 100 (1005)
R531	1-208-863-81	s RES, CHIP 100 (1005)
R532	1-208-863-81	s RES, CHIP 100 (1005)
R533	1-208-919-81	s RES, CHIP 22K (1005)
R534	1-208-919-81	s RES, CHIP 22K (1005)
R535	1-218-957-81	s RES, CHIP 2.2K
R536	1-218-941-81	s RES, CHIP 100
R537	1-218-941-81	s RES, CHIP 100
R538	1-218-941-81	s RES, CHIP 100
R539	1-218-941-81	s RES, CHIP 100
R540	1-220-878-81	s RES, CHIP 22 (1005)
R541	1-218-941-81	s RES, CHIP 100
R542	1-218-941-81	s RES, CHIP 100
R601	1-218-941-81	s RES, CHIP 100
R602	1-218-941-81	s RES, CHIP 100
R603	1-218-941-81	s RES, CHIP 100
R605	1-218-941-81	s RES, CHIP 100
R606	1-218-941-81	s RES, CHIP 100
R607	1-218-941-81	s RES, CHIP 100
R608	1-218-941-81	s RES, CHIP 100
R609	1-218-941-81	s RES, CHIP 100
R610	1-218-941-81	s RES, CHIP 100
R611	1-218-965-81	s RES, CHIP 10K 1005
R612	1-218-965-81	s RES, CHIP 10K 1005

(DPR-298 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R613	1-218-957-81	s RES, CHIP 2.2K
R614	1-218-957-81	s RES, CHIP 2.2K
R615	1-218-957-81	s RES, CHIP 2.2K
R616	1-218-957-81	s RES, CHIP 2.2K
R617	1-218-941-81	s RES, CHIP 100
R618	1-218-953-81	s RES, CHIP 1.0K
R619	1-218-973-81	s RES, CHIP 47K
R620	1-208-915-81	s RES, CHIP 15K (1005)
R621	1-218-941-81	s RES, CHIP 100
R622	1-218-965-81	s RES, CHIP 10K 1005
R623	1-218-957-81	s RES, CHIP 2.2K
R624	1-218-957-81	s RES, CHIP 2.2K
R625	1-218-977-81	s RES, CHIP 100K
R626	1-218-973-81	s RES, CHIP 47K
R627	1-218-957-81	s RES, CHIP 2.2K
R628	1-218-973-81	s RES, CHIP 47K
R629	1-218-973-81	s RES, CHIP 47K
R630	1-218-973-81	s RES, CHIP 47K
R631	1-218-957-81	s RES, CHIP 2.2K
R632	1-218-953-81	s RES, CHIP 1.0K
R633	1-218-941-81	s RES, CHIP 100
R634	1-218-941-81	s RES, CHIP 100
R635	1-218-973-81	s RES, CHIP 47K
R636	1-218-929-81	s RES, CHIP 10
R637	1-218-929-81	s RES, CHIP 10
R638	1-218-957-81	s RES, CHIP 2.2K
R639	1-218-941-81	s RES, CHIP 100
R640	1-218-965-81	s RES, CHIP 10K 1005
R641	1-218-965-81	s RES, CHIP 10K 1005
R642	1-218-977-81	s RES, CHIP 100K
R643	1-218-973-81	s RES, CHIP 47K
R644	1-218-957-81	s RES, CHIP 2.2K
R645	1-218-965-81	s RES, CHIP 10K 1005
R646	1-218-953-81	s RES, CHIP 1.0K
R647	1-218-961-81	s RES, CHIP 4.7K
R648	1-218-957-81	s RES, CHIP 2.2K
R649	1-218-965-81	s RES, CHIP 10K 1005
R650	1-218-965-81	s RES, CHIP 10K 1005
R651	1-218-941-81	s RES, CHIP 100
R652	1-218-941-81	s RES, CHIP 100
R653	1-218-941-81	s RES, CHIP 100
R654	1-218-941-81	s RES, CHIP 100
R656	1-218-941-81	s RES, CHIP 100
R657	1-218-941-81	s RES, CHIP 100
R658	1-218-941-81	s RES, CHIP 100
R659	1-218-941-81	s RES, CHIP 100
R660	1-242-967-81	s RES, CHIP 1.0 (1005)
R661	1-242-967-81	s RES, CHIP 1.0 (1005)
R662	1-218-941-81	s RES, CHIP 100
R663	1-218-965-81	s RES, CHIP 10K 1005
R664	1-218-941-81	s RES, CHIP 100
R665	1-218-977-81	s RES, CHIP 100K
R666	1-208-933-81	s RES, CHIP 82K (1005)
R667	1-218-965-81	s RES, CHIP 10K 1005
R668	1-218-937-81	s RES, CHIP 47
R669	1-218-965-81	s RES, CHIP 10K 1005
R670	1-218-941-81	s RES, CHIP 100
R671	1-218-929-81	s RES, CHIP 10
R672	1-218-965-81	s RES, CHIP 10K 1005

(DPR-298 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R673	1-218-929-81	s RES, CHIP 10
R674	1-218-969-81	s RES, CHIP 22K
R675	1-218-929-81	s RES, CHIP 10
R676	1-218-989-81	s RES, CHIP 1M
R677	1-218-953-81	s RES, CHIP 1.0K
R678	1-218-929-81	s RES, CHIP 10
R679	1-218-965-81	s RES, CHIP 10K 1005
R680	1-218-941-81	s RES, CHIP 100
R681	1-218-965-81	s RES, CHIP 10K 1005
R682	1-218-965-81	s RES, CHIP 10K 1005
R683	1-218-941-81	s RES, CHIP 100
R684	1-218-941-81	s RES, CHIP 100
R685	1-218-941-81	s RES, CHIP 100
R686	1-218-941-81	s RES, CHIP 100
R687	1-218-941-81	s RES, CHIP 100
R688	1-218-965-81	s RES, CHIP 10K 1005
R689	1-218-945-81	s RES, CHIP 220
R690	1-218-929-81	s RES, CHIP 10
R691	1-218-929-81	s RES, CHIP 10
R692	1-218-929-81	s RES, CHIP 10
R693	1-218-929-81	s RES, CHIP 10
R694	1-218-929-81	s RES, CHIP 10
R695	1-218-929-81	s RES, CHIP 10
R696	1-218-929-81	s RES, CHIP 10
R697	1-208-871-81	s RES, CHIP 220 (1005)
R698	1-208-915-81	s RES, CHIP 15K (1005)
R699	1-208-911-81	s RES, CHIP 10K (1005)
R701	1-218-941-81	s RES, CHIP 100
R702	1-218-941-81	s RES, CHIP 100
R703	1-218-941-81	s RES, CHIP 100
R704	1-218-941-81	s RES, CHIP 100
R705	1-218-941-81	s RES, CHIP 100
R709	1-218-929-81	s RES, CHIP 10
R710	1-218-929-81	s RES, CHIP 10
R711	1-218-929-81	s RES, CHIP 10
R712	1-208-855-81	s RES, CHIP 47 (1005)
R713	1-218-941-81	s RES, CHIP 100
R714	1-218-941-81	s RES, CHIP 100
R715	1-208-855-81	s RES, CHIP 47 (1005)
R716	1-208-855-81	s RES, CHIP 47 (1005)
R717	1-208-855-81	s RES, CHIP 47 (1005)
R718	1-208-855-81	s RES, CHIP 47 (1005)
R731	1-208-855-81	s RES, CHIP 47 (1005)
R732	1-208-855-81	s RES, CHIP 47 (1005)
R733	1-208-855-81	s RES, CHIP 47 (1005)
R734	1-208-883-81	s RES, CHIP 680 (1005)
R735	1-208-883-81	s RES, CHIP 680 (1005)
R736	1-208-883-81	s RES, CHIP 680 (1005)
R737	1-208-899-81	s RES, CHIP 3.3K (1005)
R738	1-208-899-81	s RES, CHIP 3.3K (1005)
R739	1-208-899-81	s RES, CHIP 3.3K (1005)
R740	1-208-875-81	s RES, CHIP 330 (1005)
R741	1-208-875-81	s RES, CHIP 330 (1005)
R742	1-208-875-81	s RES, CHIP 330 (1005)
R743	1-208-875-81	s RES, CHIP 330 (1005)
R744	1-208-875-81	s RES, CHIP 330 (1005)
R745	1-208-875-81	s RES, CHIP 330 (1005)
R746	1-208-887-81	s RES, CHIP 1.0K (1005)
R747	1-208-899-81	s RES, CHIP 3.3K (1005)

(DPR-298 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R748	1-208-895-81	s RES, CHIP 2.2K (1005)
R749	1-208-887-81	s RES, CHIP 1.0K (1005)
R750	1-208-899-81	s RES, CHIP 3.3K (1005)
R751	1-208-895-81	s RES, CHIP 2.2K (1005)
R752	1-208-887-81	s RES, CHIP 1.0K (1005)
R753	1-208-899-81	s RES, CHIP 3.3K (1005)
R754	1-208-895-81	s RES, CHIP 2.2K (1005)
R755	1-208-915-81	s RES, CHIP 15K (1005)
R756	1-208-915-81	s RES, CHIP 15K (1005)
R757	1-208-915-81	s RES, CHIP 15K (1005)
R758	1-208-873-81	s RES, CHIP 270 (1005)
R759	1-208-873-81	s RES, CHIP 270 (1005)
R760	1-208-871-81	s RES, CHIP 220 (1005)
R761	1-208-863-81	s RES, CHIP 100 (1005)
R762	1-208-863-81	s RES, CHIP 100 (1005)
R763	1-208-863-81	s RES, CHIP 100 (1005)
R764	1-208-863-81	s RES, CHIP 100 (1005)
R765	1-208-863-81	s RES, CHIP 100 (1005)
R766	1-208-867-81	s RES, CHIP 150 (1005)
R767	1-208-891-81	s RES, CHIP 1.5K (1005)
R768	1-208-907-81	s RES, CHIP 6.8K (1005)
R769	1-208-889-81	s RES, CHIP 1.2K (1005)
R770	1-208-891-81	s RES, CHIP 1.5K (1005)
R771	1-208-907-81	s RES, CHIP 6.8K (1005)
R772	1-208-889-81	s RES, CHIP 1.2K (1005)
R773	1-208-911-81	s RES, CHIP 10K (1005)
R774	1-208-901-81	s RES, CHIP 3.9K (1005)
R775	1-208-889-81	s RES, CHIP 1.2K (1005)
R776	1-208-883-81	s RES, CHIP 680 (1005)
R777	1-208-883-81	s RES, CHIP 680 (1005)
R778	1-208-885-81	s RES, CHIP 820 (1005)
R779	1-208-871-81	s RES, CHIP 220 (1005)
R780	1-208-871-81	s RES, CHIP 220 (1005)
R781	1-208-871-81	s RES, CHIP 220 (1005)
R782	1-208-883-81	s RES, CHIP 680 (1005)
R783	1-208-883-81	s RES, CHIP 680 (1005)
R784	1-208-885-81	s RES, CHIP 820 (1005)
R785	1-208-871-81	s RES, CHIP 220 (1005)
R786	1-208-871-81	s RES, CHIP 220 (1005)
R787	1-208-871-81	s RES, CHIP 220 (1005)
R788	1-208-871-81	s RES, CHIP 220 (1005)
R789	1-208-871-81	s RES, CHIP 220 (1005)
R790	1-208-871-81	s RES, CHIP 220 (1005)
R791	1-218-990-81	s CONDUCTOR, CHIP (1005)
R792	1-208-875-81	s RES, CHIP 330 (1005)
R793	1-218-941-81	s RES, CHIP 100
R794	1-218-990-81	s CONDUCTOR, CHIP (1005)
R795	1-208-955-81	s RES, CHIP 680K (1005)
R796	1-208-863-81	s RES, CHIP 100 (1005)
R797	1-218-990-81	s CONDUCTOR, CHIP (1005)
R798	1-218-990-81	s CONDUCTOR, CHIP (1005)
R799	1-208-935-81	s RES, CHIP 100K (1005)
R800	1-208-867-81	s RES, CHIP 150 (1005)
R801	1-208-899-81	s RES, CHIP 3.3K (1005)
R802	1-208-895-81	s RES, CHIP 2.2K (1005)
R803	1-208-895-81	s RES, CHIP 2.2K (1005)
R804	1-208-875-81	s RES, CHIP 330 (1005)
R806	1-208-883-81	s RES, CHIP 680 (1005)
R807	1-208-907-81	s RES, CHIP 6.8K (1005)

(DPR-298 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R809	1-218-990-81	s CONDUCTOR, CHIP (1005)
R811	1-208-911-81	s RES, CHIP 10K (1005)
R812	1-208-911-81	s RES, CHIP 10K (1005)
R813	1-218-990-81	s CONDUCTOR, CHIP (1005)
R815	1-218-990-81	s CONDUCTOR, CHIP (1005)
R817	1-218-990-81	s CONDUCTOR, CHIP (1005)
R819	1-218-990-81	s CONDUCTOR, CHIP (1005)
R821	1-218-990-81	s CONDUCTOR, CHIP (1005)
R822	1-208-887-81	s RES, CHIP 1.0K (1005)
R824	1-208-863-81	s RES, CHIP 100 (1005)
R825	1-208-863-81	s RES, CHIP 100 (1005)
R826	1-218-990-81	s CONDUCTOR, CHIP (1005)
R828	1-208-871-81	s RES, CHIP 220 (1005)
R829	1-218-929-81	s RES, CHIP 10
R830	1-208-901-81	s RES, CHIP 3.9K (1005)
R831	1-208-911-81	s RES, CHIP 10K (1005)
R832	1-208-887-81	s RES, CHIP 1.0K (1005)
R833	1-208-855-81	s RES, CHIP 47 (1005)
R834	1-218-929-81	s RES, CHIP 10
R836	1-208-863-81	s RES, CHIP 100 (1005)
R837	1-208-863-81	s RES, CHIP 100 (1005)
R838	1-208-863-81	s RES, CHIP 100 (1005)
R839	1-208-887-81	s RES, CHIP 1.0K (1005)
R840	1-208-883-81	s RES, CHIP 680 (1005)
R841	1-208-935-81	s RES, CHIP 100K (1005)
R842	1-208-871-81	s RES, CHIP 220 (1005)
R843	1-208-871-81	s RES, CHIP 220 (1005)
R844	1-208-871-81	s RES, CHIP 220 (1005)
R845	1-218-973-81	s RES, CHIP 47K
R846	1-218-953-81	s RES, CHIP 1.0K
R847	1-218-973-81	s RES, CHIP 47K
R848	1-218-929-81	s RES, CHIP 10
R849	1-218-953-81	s RES, CHIP 1.0K
R850	1-218-973-81	s RES, CHIP 47K
R851	1-218-957-81	s RES, CHIP 2.2K
R852	1-218-957-81	s RES, CHIP 2.2K
R854	1-218-965-81	s RES, CHIP 10K 1005
R855	1-218-953-81	s RES, CHIP 1.0K
R856	1-218-965-81	s RES, CHIP 10K 1005
R857	1-218-957-81	s RES, CHIP 2.2K
R858	1-218-977-81	s RES, CHIP 100K
R859	1-218-929-81	s RES, CHIP 10
R860	1-208-855-81	s RES, CHIP 47 (1005)
R862	1-218-973-81	s RES, CHIP 47K
R863	1-208-863-81	s RES, CHIP 100 (1005)
R864	1-208-887-81	s RES, CHIP 1.0K (1005)
R865	1-218-953-81	s RES, CHIP 1.0K
R866	1-208-863-81	s RES, CHIP 100 (1005)
R868	1-218-953-81	s RES, CHIP 1.0K
R870	1-218-973-81	s RES, CHIP 47K
R871	1-211-990-91	s RES, CHIP 75 (1608)
R872	1-211-990-91	s RES, CHIP 75 (1608)
R873	1-208-883-81	s RES, CHIP 680 (1005)
R875	1-218-937-81	s RES, CHIP 47
R876	1-218-953-81	s RES, CHIP 1.0K
R877	1-218-953-81	s RES, CHIP 1.0K
R878	1-208-863-81	s RES, CHIP 100 (1005)
R879	1-216-864-91	s CONDUCTOR, CHIP (1608)
R880	1-216-864-91	s CONDUCTOR, CHIP (1608)

(DPR-298 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R881	1-218-965-81	s RES, CHIP 10K 1005
R882	1-218-953-81	s RES, CHIP 1.0K
R883	1-218-953-81	s RES, CHIP 1.0K
R884	1-218-929-81	s RES, CHIP 10
R885	1-218-990-81	s CONDUCTOR, CHIP (1005)
R886	1-218-973-81	s RES, CHIP 47K
R887	1-208-859-81	s RES, CHIP 68 (1005)
R888	1-208-887-81	s RES, CHIP 1.0K (1005)
R889	1-208-887-81	s RES, CHIP 1.0K (1005)
R890	1-218-973-81	s RES, CHIP 47K
R891	1-208-887-81	s RES, CHIP 1.0K (1005)
R892	1-218-953-81	s RES, CHIP 1.0K
R895	1-218-965-81	s RES, CHIP 10K 1005
R896	1-218-823-91	s RES, CHIP 100 (1608)
R897	1-218-823-91	s RES, CHIP 100 (1608)
R898	1-211-990-91	s RES, CHIP 75 (1608)
R899	1-208-859-81	s RES, CHIP 68 (1005)
R900	1-208-859-81	s RES, CHIP 68 (1005)
R901	1-208-863-81	s RES, CHIP 100 (1005)
R902	1-208-863-81	s RES, CHIP 100 (1005)
R903	1-208-887-81	s RES, CHIP 1.0K (1005)
R904	1-208-911-81	s RES, CHIP 10K (1005)
R905	1-208-863-81	s RES, CHIP 100 (1005)
R906	1-208-855-81	s RES, CHIP 47 (1005)
R907	1-208-855-81	s RES, CHIP 47 (1005)
R908	1-208-855-81	s RES, CHIP 47 (1005)
R909	1-208-911-81	s RES, CHIP 10K (1005)
R910	1-208-911-81	s RES, CHIP 10K (1005)
R911	1-208-863-81	s RES, CHIP 100 (1005)
R912	1-218-929-81	s RES, CHIP 10
R913	1-208-911-81	s RES, CHIP 10K (1005)
R915	1-208-911-81	s RES, CHIP 10K (1005)
R917	1-218-929-81	s RES, CHIP 10
R918	1-218-929-81	s RES, CHIP 10
R919	1-218-929-81	s RES, CHIP 10
R920	1-218-929-81	s RES, CHIP 10
R922	1-208-927-81	s RES, CHIP 47K (1005)
R923	1-208-927-81	s RES, CHIP 47K (1005)
R924	1-208-927-81	s RES, CHIP 47K (1005)
R925	1-208-863-81	s RES, CHIP 100 (1005)
R926	1-208-863-81	s RES, CHIP 100 (1005)
R927	1-218-937-81	s RES, CHIP 47
R928	1-218-937-81	s RES, CHIP 47
R929	1-208-871-81	s RES, CHIP 220 (1005)
R930	1-208-871-81	s RES, CHIP 220 (1005)
R931	1-208-855-81	s RES, CHIP 47 (1005)
R932	1-208-855-81	s RES, CHIP 47 (1005)
R933	1-208-855-81	s RES, CHIP 47 (1005)
R934	1-208-855-81	s RES, CHIP 47 (1005)
RB181	1-234-380-21	s RES, NETWORK 47K (1005X4)
RB182	1-234-380-21	s RES, NETWORK 47K (1005X4)
RB183	1-234-380-21	s RES, NETWORK 47K (1005X4)
RB184	1-234-380-21	s RES, NETWORK 47K (1005X4)
RB185	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB186	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB187	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB188	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB189	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB190	1-234-372-21	s RES, NETWORK 100 (1005X4)

(DPR-298 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description		
RB360	1-234-374-21	s	RES, NETWORK	470	(1005X4)
RB361	1-234-374-21	s	RES, NETWORK	470	(1005X4)
RB362	1-234-374-21	s	RES, NETWORK	470	(1005X4)
RB363	1-234-374-21	s	RES, NETWORK	470	(1005X4)
RB364	1-234-374-21	s	RES, NETWORK	470	(1005X4)
RB365	1-234-374-21	s	RES, NETWORK	470	(1005X4)
RB366	1-234-374-21	s	RES, NETWORK	470	(1005X4)
RB367	1-234-374-21	s	RES, NETWORK	470	(1005X4)
RB368	1-234-374-21	s	RES, NETWORK	470	(1005X4)
RB369	1-234-374-21	s	RES, NETWORK	470	(1005X4)
RB370	1-234-374-21	s	RES, NETWORK	470	(1005X4)
RB371	1-234-374-21	s	RES, NETWORK	470	(1005X4)
RB372	1-234-374-21	s	RES, NETWORK	470	(1005X4)
RB373	1-234-374-21	s	RES, NETWORK	470	(1005X4)
RB374	1-234-374-21	s	RES, NETWORK	470	(1005X4)
RB375	1-234-374-21	s	RES, NETWORK	470	(1005X4)
RB376	1-234-374-21	s	RES, NETWORK	470	(1005X4)
RB377	1-234-374-21	s	RES, NETWORK	470	(1005X4)
RB378	1-234-374-21	s	RES, NETWORK	470	(1005X4)
RB379	1-234-374-21	s	RES, NETWORK	470	(1005X4)
RB380	1-234-374-21	s	RES, NETWORK	470	(1005X4)
RB381	1-234-374-21	s	RES, NETWORK	470	(1005X4)
RB382	1-234-374-21	s	RES, NETWORK	470	(1005X4)
RB383	1-234-374-21	s	RES, NETWORK	470	(1005X4)
RB384	1-234-374-21	s	RES, NETWORK	470	(1005X4)
RB385	1-234-374-21	s	RES, NETWORK	470	(1005X4)
RB386	1-234-371-21	s	RES, NETWORK	47	(1005X4)
RB387	1-234-371-21	s	RES, NETWORK	47	(1005X4)
RB401	1-234-373-21	s	RES, NETWORK	220	(1005X4)
RB402	1-234-373-21	s	RES, NETWORK	220	(1005X4)
RB403	1-234-373-21	s	RES, NETWORK	220	(1005X4)
RB404	1-234-373-21	s	RES, NETWORK	220	(1005X4)
RB405	1-234-373-21	s	RES, NETWORK	220	(1005X4)
RB406	1-234-373-21	s	RES, NETWORK	220	(1005X4)
RB407	1-234-373-21	s	RES, NETWORK	220	(1005X4)
RB408	1-234-373-21	s	RES, NETWORK	220	(1005X4)
RB409	1-234-373-21	s	RES, NETWORK	220	(1005X4)
RB410	1-234-373-21	s	RES, NETWORK	220	(1005X4)
RB411	1-234-373-21	s	RES, NETWORK	220	(1005X4)
RB412	1-234-373-21	s	RES, NETWORK	220	(1005X4)
RB413	1-234-373-21	s	RES, NETWORK	220	(1005X4)
RB414	1-234-373-21	s	RES, NETWORK	220	(1005X4)
RB415	1-234-373-21	s	RES, NETWORK	220	(1005X4)
RB416	1-234-373-21	s	RES, NETWORK	220	(1005X4)
RB417	1-234-373-21	s	RES, NETWORK	220	(1005X4)
RB418	1-234-373-21	s	RES, NETWORK	220	(1005X4)
RB419	1-234-373-21	s	RES, NETWORK	220	(1005X4)
RB420	1-234-373-21	s	RES, NETWORK	220	(1005X4)
RB421	1-234-373-21	s	RES, NETWORK	220	(1005X4)
RB422	1-234-371-21	s	RES, NETWORK	47	(1005X4)
RB423	1-234-371-21	s	RES, NETWORK	47	(1005X4)
RB424	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB425	1-234-380-21	s	RES, NETWORK	47K	(1005X4)
RB426	1-234-380-21	s	RES, NETWORK	47K	(1005X4)
RB427	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB428	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB429	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB430	1-234-371-21	s	RES, NETWORK	47	(1005X4)
RB431	1-234-371-21	s	RES, NETWORK	47	(1005X4)

(DPR-298 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description		
RB615	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB616	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB617	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB618	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB619	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB620	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB621	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB622	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB623	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB624	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB625	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB626	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB627	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB628	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB629	1-234-380-21	s	RES, NETWORK	47K	(1005X4)
RB630	1-234-371-21	s	RES, NETWORK	47	(1005X4)
RB701	1-234-373-21	s	RES, NETWORK	220	(1005X4)
RB702	1-234-371-21	s	RES, NETWORK	47	(1005X4)
RB703	1-234-371-21	s	RES, NETWORK	47	(1005X4)
RB704	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB705	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB706	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB707	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB708	1-234-373-21	s	RES, NETWORK	220	(1005X4)
RB709	1-234-373-21	s	RES, NETWORK	220	(1005X4)
RB710	1-234-373-21	s	RES, NETWORK	220	(1005X4)
RB711	1-234-373-21	s	RES, NETWORK	220	(1005X4)
RB712	1-234-373-21	s	RES, NETWORK	220	(1005X4)
RB713	1-234-373-21	s	RES, NETWORK	220	(1005X4)
RB714	1-234-373-21	s	RES, NETWORK	220	(1005X4)
RB715	1-234-373-21	s	RES, NETWORK	220	(1005X4)
RB716	1-234-373-21	s	RES, NETWORK	220	(1005X4)
RB717	1-234-373-21	s	RES, NETWORK	220	(1005X4)
RB718	1-234-373-21	s	RES, NETWORK	220	(1005X4)
RB719	1-234-373-21	s	RES, NETWORK	220	(1005X4)
RB720	1-234-373-21	s	RES, NETWORK	220	(1005X4)
RB721	1-234-373-21	s	RES, NETWORK	220	(1005X4)
RB722	1-234-373-21	s	RES, NETWORK	220	(1005X4)
RB723	1-234-371-21	s	RES, NETWORK	47	(1005X4)
RB724	1-234-371-21	s	RES, NETWORK	47	(1005X4)
RB725	1-234-371-21	s	RES, NETWORK	47	(1005X4)
RB727	1-234-371-21	s	RES, NETWORK	47	(1005X4)
RB729	1-234-371-21	s	RES, NETWORK	47	(1005X4)
RB731	1-234-371-21	s	RES, NETWORK	47	(1005X4)
RB733	1-234-373-21	s	RES, NETWORK	220	(1005X4)
RB735	1-234-373-21	s	RES, NETWORK	220	(1005X4)
RB737	1-234-373-21	s	RES, NETWORK	220	(1005X4)
RB740	1-234-373-21	s	RES, NETWORK	220	(1005X4)
RB742	1-234-373-21	s	RES, NETWORK	220	(1005X4)
RB744	1-234-371-21	s	RES, NETWORK	47	(1005X4)
RB757	1-234-373-21	s	RES, NETWORK	220	(1005X4)
RB801	1-234-373-21	s	RES, NETWORK	220	(1005X4)
RB802	1-234-373-21	s	RES, NETWORK	220	(1005X4)
RB803	1-234-373-21	s	RES, NETWORK	220	(1005X4)
RB804	1-234-373-21	s	RES, NETWORK	220	(1005X4)
RB805	1-234-373-21	s	RES, NETWORK	220	(1005X4)
RB806	1-234-373-21	s	RES, NETWORK	220	(1005X4)
RB807	1-234-373-21	s	RES, NETWORK	220	(1005X4)
RB808	1-234-373-21	s	RES, NETWORK	220	(1005X4)

(DPR-298 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
RB809	1-234-373-21	s RES, NETWORK 220 (1005X4)
RB810	1-234-373-21	s RES, NETWORK 220 (1005X4)
RB811	1-234-373-21	s RES, NETWORK 220 (1005X4)
RB812	1-234-373-21	s RES, NETWORK 220 (1005X4)
RB813	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB814	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB815	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB816	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB817	1-234-373-21	s RES, NETWORK 220 (1005X4)
RB818	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB819	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB820	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB821	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB901	1-234-380-21	s RES, NETWORK 47K (1005X4)
RB902	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB903	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB904	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB905	1-234-380-21	s RES, NETWORK 47K (1005X4)
RB906	1-234-380-21	s RES, NETWORK 47K (1005X4)
RB907	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB908	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB909	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB910	1-234-380-21	s RES, NETWORK 47K (1005X4)
RB911	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB912	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB913	1-234-380-21	s RES, NETWORK 47K (1005X4)
RB914	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB915	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB917	1-234-380-21	s RES, NETWORK 47K (1005X4)
RB918	1-234-380-21	s RES, NETWORK 47K (1005X4)
RB919	1-234-380-21	s RES, NETWORK 47K (1005X4)
S901	1-692-270-41	s SWITCH, SLIDE
THP101 Δ	1-804-616-21	s THERMISTOR, POSITIVE
THP102 Δ	1-804-458-21	s THERMISTOR, POSITIVE
THP103 Δ	1-804-616-21	s THERMISTOR, POSITIVE
THP104 Δ	1-804-616-21	s THERMISTOR, POSITIVE
THP105 Δ	1-804-616-21	s THERMISTOR, POSITIVE
THP106 Δ	1-804-616-21	s THERMISTOR, POSITIVE
THP107 Δ	1-804-616-21	s THERMISTOR, POSITIVE
THP108 Δ	1-804-616-21	s THERMISTOR, POSITIVE
TP501	1-535-877-22	s CHIP, CHECKER
TP502	1-535-877-22	s CHIP, CHECKER
TP601	1-535-877-22	s CHIP, CHECKER
TP602	1-535-877-22	s CHIP, CHECKER
TP801	1-535-877-22	s CHIP, CHECKER
TP802	1-535-877-22	s CHIP, CHECKER
TP803	1-535-877-22	s CHIP, CHECKER
TP804	1-535-877-22	s CHIP, CHECKER
TP805	1-535-877-22	s CHIP, CHECKER
X601	1-795-670-12	s OSCILLATOR, CRYSTAL (VCXO) 3.3V
X602	1-795-671-12	s OSCILLATOR, CRYSTAL (VCXO) 3.3V
X603	1-813-212-11	s OSCILLATOR, CRYSTAL
X801	1-814-162-11	s OSCILLATOR (VCO)

DR-632 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1708-273-A	s MOUNTED CIRCUIT BOARD, DR-632
C1	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C2	1-135-960-91	s CAP, CHIP CERAMIC 10MF B (3225)
C3	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C4	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C5	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C6	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C7	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C8	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C9	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C10	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C11	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C12	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C13	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C14	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C15	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C16	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C17	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C18	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C19	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C20	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C21	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C22	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C23	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C24	1-165-884-91	s CAP, CERAMIC 2.2MF (1608)
C25	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C30	1-164-858-81	s CAP, CHIP CERAMIC 22PF CH 1005
C31	1-164-858-81	s CAP, CHIP CERAMIC 22PF CH 1005
C32	1-164-858-81	s CAP, CHIP CERAMIC 22PF CH 1005
C33	1-164-858-81	s CAP, CHIP CERAMIC 22PF CH 1005
C34	1-164-858-81	s CAP, CHIP CERAMIC 22PF CH 1005
C35	1-164-858-81	s CAP, CHIP CERAMIC 22PF CH 1005
C36	1-164-858-81	s CAP, CHIP CERAMIC 22PF CH 1005
C37	1-100-567-81	s CAP, CHIP CERAMIC 0.01MF B 1005
C38	1-100-567-81	s CAP, CHIP CERAMIC 0.01MF B 1005
C39	1-100-567-81	s CAP, CHIP CERAMIC 0.01MF B 1005
C44	1-164-858-81	s CAP, CHIP CERAMIC 22PF CH 1005
C45	1-164-858-81	s CAP, CHIP CERAMIC 22PF CH 1005
C46	1-164-858-81	s CAP, CHIP CERAMIC 22PF CH 1005
C47	1-164-858-81	s CAP, CHIP CERAMIC 22PF CH 1005
C48	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C49	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C50	1-100-567-81	s CAP, CHIP CERAMIC 0.01MF B 1005
C51	1-100-567-81	s CAP, CHIP CERAMIC 0.01MF B 1005
C52	1-112-298-91	o CAP, CERAMIC 1MF B (1608)
C53	1-112-815-91	s CAP, CERAMIC 10MF C (1608)
C54	1-100-827-21	s CAP, ELECT 150MF (8X7)
C55	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C56	1-164-858-81	s CAP, CHIP CERAMIC 22PF CH 1005
C57	1-164-858-81	s CAP, CHIP CERAMIC 22PF CH 1005
C58	1-164-858-81	s CAP, CHIP CERAMIC 22PF CH 1005
C59	1-100-567-81	s CAP, CHIP CERAMIC 0.01MF B 1005
C60	1-112-815-91	s CAP, CERAMIC 10MF C (1608)
C61	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C66	1-164-858-81	s CAP, CHIP CERAMIC 22PF CH 1005
C67	1-164-858-81	s CAP, CHIP CERAMIC 22PF CH 1005
C68	1-164-858-81	s CAP, CHIP CERAMIC 22PF CH 1005
C69	1-164-858-81	s CAP, CHIP CERAMIC 22PF CH 1005

(DR-632 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C70	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C71	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C72	1-114-549-11	s	CAP, NIOBIUM ELECT 47UF
C73	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C74	1-135-342-21	s	CAP, ELECT 56MF (6.3X6)
C75	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C76	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C77	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C78	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C79	1-127-956-21	s	CAP, CHIP FILM 0.1MF (3225)
C80	1-127-956-21	s	CAP, CHIP FILM 0.1MF (3225)
C82	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C83	1-100-816-21	s	CAP, ELECT 33MF (5.6X6.5)
C84	1-100-816-21	s	CAP, ELECT 33MF (5.6X6.5)
C85	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C86	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C88	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
CN1	1-778-645-31	s	CONNECTOR, FFC/FPC(ZIF) AN 10P
CN2	1-778-451-31	s	CONNECTOR, FFC/FPC(ZIF) AN 50P
CN3	1-778-451-31	s	CONNECTOR, FFC/FPC(ZIF) AN 50P
CN4	1-778-451-31	s	CONNECTOR, FFC/FPC(ZIF) AN 50P
CN5	1-782-954-11	o	CONNECTOR, BOARD TO BOARD 100P
D1	8-719-043-70	s	DIODE MA6S121-(TX)
D2	8-719-043-70	s	DIODE MA6S121-(TX)
D3	8-719-043-70	s	DIODE MA6S121-(TX)
D4	8-719-043-70	s	DIODE MA6S121-(TX)
D5	8-719-043-70	s	DIODE MA6S121-(TX)
D6	8-719-043-70	s	DIODE MA6S121-(TX)
D7	8-719-083-60	s	DI UDZSUSTE-174.7B
D8	8-719-083-60	s	DI UDZSUSTE-174.7B
FB1	1-469-100-21	s	FERRITE, EMI (SMD) (1608)
FB2	1-469-100-21	s	FERRITE, EMI (SMD) (1608)
FB3	1-469-100-21	s	FERRITE, EMI (SMD) (1608)
FB4	1-469-100-21	s	FERRITE, EMI (SMD) (1608)
FB5	1-469-100-21	s	FERRITE, EMI (SMD) (1608)
FB6	1-469-100-21	s	FERRITE, EMI (SMD) (1608)
FB7	1-469-100-21	s	FERRITE, EMI (SMD) (1608)
FB8	1-469-100-21	s	FERRITE, EMI (SMD) (1608)
FB9	1-469-100-21	s	FERRITE, EMI (SMD) (1608)
FB10	1-469-100-21	s	FERRITE, EMI (SMD) (1608)
FB11	1-469-100-21	s	FERRITE, EMI (SMD) (1608)
FB12	1-469-100-21	s	FERRITE, EMI (SMD) (1608)
FB13	1-469-100-21	s	FERRITE, EMI (SMD) (1608)
FB14	1-469-100-21	s	FERRITE, EMI (SMD) (1608)
FB15	1-469-100-21	s	FERRITE, EMI (SMD) (1608)
FB16	1-469-100-21	s	FERRITE, EMI (SMD) (1608)
FB17	1-469-100-21	s	FERRITE, EMI (SMD) (1608)
FB18	1-469-100-21	s	FERRITE, EMI (SMD) (1608)
FB19	1-469-100-21	s	FERRITE, EMI (SMD) (1608)
FB20	1-469-100-21	s	FERRITE, EMI (SMD) (1608)
IC1	8-759-573-97	s	IC SN74LVC541APWR
IC2	8-759-573-97	s	IC SN74LVC541APWR
IC3	6-708-326-01	s	IC TC74HCT4053AFT(EL)
IC4	8-759-672-76	s	IC AK9813BF-E2
IC5	6-700-439-01	s	IC SN74ALVC00PWR
IC6	6-700-439-01	s	IC SN74ALVC00PWR
IC7	6-700-439-01	s	IC SN74ALVC00PWR
IC8	6-711-375-01	s	IC LT1964ES5-BYP#TR

(DR-632 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC9	6-711-375-01	s	IC LT1964ES5-BYP#TR
IC10	8-759-327-01	s	IC NJM062V(Te2)
IC11	6-700-439-01	s	IC SN74ALVC00PWR
IC12	6-700-439-01	s	IC SN74ALVC00PWR
IC13	6-700-439-01	s	IC SN74ALVC00PWR
IC14	6-711-852-01	s	IC LTC1844ES5-BYP
IC15	6-700-439-01	s	IC SN74ALVC00PWR
IC16	6-700-439-01	s	IC SN74ALVC00PWR
IC17	6-704-976-01	s	IC ADR381ARTZ-REEL7
IC18	8-759-592-47	s	IC TC7SZ08FU(Te85R)
Q1	8-729-144-81	s	TRANSISTOR 2SC4176T1B33B34B35
Q2	8-729-144-81	s	TRANSISTOR 2SC4176T1B33B34B35
Q3	8-729-140-86	s	TRANSISTOR 2SA1610-T1Y34
Q4	8-729-053-11	s	TRANSISTOR FDC6561AN
Q5	8-729-053-12	s	TRANSISTOR FDC6506P
Q6	8-729-053-11	s	TRANSISTOR FDC6561AN
Q7	8-729-053-12	s	TRANSISTOR FDC6506P
Q8	8-729-053-11	s	TRANSISTOR FDC6561AN
Q9	8-729-053-12	s	TRANSISTOR FDC6506P
Q10	8-729-053-11	s	TRANSISTOR FDC6561AN
Q11	8-729-053-12	s	TRANSISTOR FDC6506P
Q12	8-729-053-11	s	TRANSISTOR FDC6561AN
Q13	8-729-053-12	s	TRANSISTOR FDC6506P
Q14	6-550-631-01	s	TRANSISTOR 2SA1797-T100-Q
Q15	6-550-631-01	s	TRANSISTOR 2SA1797-T100-Q
R1	1-208-895-81	s	RES, CHIP 2.2K (1005)
R2	1-208-895-81	s	RES, CHIP 2.2K (1005)
R3	1-208-895-81	s	RES, CHIP 2.2K (1005)
R4	1-216-797-91	s	RES, CHIP 10 (1608)
R5	1-216-797-91	s	RES, CHIP 10 (1608)
R6	1-216-797-91	s	RES, CHIP 10 (1608)
R7	1-216-797-91	s	RES, CHIP 10 (1608)
R8	1-208-863-81	s	RES, CHIP 100 (1005)
R9	1-208-863-81	s	RES, CHIP 100 (1005)
R10	1-208-863-81	s	RES, CHIP 100 (1005)
R11	1-220-870-81	s	RES, CHIP 10 (1005)
R12	1-220-870-81	s	RES, CHIP 10 (1005)
R14	1-220-870-81	s	RES, CHIP 10 (1005)
R17	1-220-878-81	s	RES, CHIP 22 (1005)
R18	1-220-878-81	s	RES, CHIP 22 (1005)
R19	1-220-878-81	s	RES, CHIP 22 (1005)
R20	1-220-878-81	s	RES, CHIP 22 (1005)
R21	1-220-878-81	s	RES, CHIP 22 (1005)
R22	1-220-878-81	s	RES, CHIP 22 (1005)
R23	1-220-878-81	s	RES, CHIP 22 (1005)
R24	1-220-878-81	s	RES, CHIP 22 (1005)
R25	1-208-855-81	s	RES, CHIP 47 (1005)
R26	1-220-878-81	s	RES, CHIP 22 (1005)
R27	1-220-878-81	s	RES, CHIP 22 (1005)
R28	1-220-870-81	s	RES, CHIP 10 (1005)
R29	1-220-870-81	s	RES, CHIP 10 (1005)
R30	1-220-870-81	s	RES, CHIP 10 (1005)
R31	1-220-870-81	s	RES, CHIP 10 (1005)
R32	1-220-870-81	s	RES, CHIP 10 (1005)
R33	1-220-870-81	s	RES, CHIP 10 (1005)
R34	1-220-870-81	s	RES, CHIP 10 (1005)
R35	1-220-870-81	s	RES, CHIP 10 (1005)
R36	1-220-870-81	s	RES, CHIP 10 (1005)
R37	1-220-870-81	s	RES, CHIP 10 (1005)

(DR-632 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R38	1-220-870-81	s RES, CHIP 10 (1005)
R39	1-220-878-81	s RES, CHIP 22 (1005)
R40	1-220-878-81	s RES, CHIP 22 (1005)
R41	1-220-878-81	s RES, CHIP 22 (1005)
R42	1-220-878-81	s RES, CHIP 22 (1005)
R43	1-220-878-81	s RES, CHIP 22 (1005)
R44	1-220-878-81	s RES, CHIP 22 (1005)
R45	1-220-878-81	s RES, CHIP 22 (1005)
R46	1-220-878-81	s RES, CHIP 22 (1005)
R47	1-208-927-81	s RES, CHIP 47K (1005)
R48	1-208-911-81	s RES, CHIP 10K (1005)
R49	1-208-919-81	s RES, CHIP 22K (1005)
R50	1-208-911-81	s RES, CHIP 10K (1005)
R52	1-208-935-81	s RES, CHIP 100K (1005)
R54	1-220-870-81	s RES, CHIP 10 (1005)
R55	1-220-870-81	s RES, CHIP 10 (1005)
R56	1-220-870-81	s RES, CHIP 10 (1005)
R57	1-220-870-81	s RES, CHIP 10 (1005)
R58	1-220-870-81	s RES, CHIP 10 (1005)
R59	1-220-870-81	s RES, CHIP 10 (1005)
R60	1-220-870-81	s RES, CHIP 10 (1005)
R61	1-220-870-81	s RES, CHIP 10 (1005)
R62	1-220-878-81	s RES, CHIP 22 (1005)
R63	1-220-878-81	s RES, CHIP 22 (1005)
R64	1-220-878-81	s RES, CHIP 22 (1005)
R65	1-220-870-81	s RES, CHIP 10 (1005)
R66	1-220-870-81	s RES, CHIP 10 (1005)
R67	1-220-870-81	s RES, CHIP 10 (1005)
R68	1-220-878-81	s RES, CHIP 22 (1005)
R69	1-220-878-81	s RES, CHIP 22 (1005)
R70	1-220-878-81	s RES, CHIP 22 (1005)
R71	1-220-878-81	s RES, CHIP 22 (1005)
R72	1-220-878-81	s RES, CHIP 22 (1005)
R73	1-220-878-81	s RES, CHIP 22 (1005)
R74	1-220-878-81	s RES, CHIP 22 (1005)
R75	1-220-878-81	s RES, CHIP 22 (1005)
R76	1-208-915-81	s RES, CHIP 15K (1005)
R77	1-208-887-81	s RES, CHIP 1.0K (1005)
R78	1-208-911-81	s RES, CHIP 10K (1005)
R79	1-220-870-81	s RES, CHIP 10 (1005)
R80	1-220-870-81	s RES, CHIP 10 (1005)
R81	1-220-870-81	s RES, CHIP 10 (1005)
R82	1-220-870-81	s RES, CHIP 10 (1005)
R83	1-220-870-81	s RES, CHIP 10 (1005)
R84	1-220-870-81	s RES, CHIP 10 (1005)
R85	1-220-870-81	s RES, CHIP 10 (1005)
R86	1-220-870-81	s RES, CHIP 10 (1005)
R87	1-208-911-81	s RES, CHIP 10K (1005)
R88	1-208-911-81	s RES, CHIP 10K (1005)
R89	1-208-923-81	s RES, CHIP 33K (1005)
R90	1-218-990-81	s CONDUCTOR, CHIP (1005)
R91	1-208-919-81	s RES, CHIP 22K (1005)
R92	1-208-875-81	s RES, CHIP 330 (1005)
R93	1-208-923-81	s RES, CHIP 33K (1005)
R94	1-218-990-81	s CONDUCTOR, CHIP (1005)
R95	1-208-919-81	s RES, CHIP 22K (1005)
R96	1-208-875-81	s RES, CHIP 330 (1005)
R97	1-208-863-81	s RES, CHIP 100 (1005)
R98	1-208-863-81	s RES, CHIP 100 (1005)

(DR-632 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R99	1-208-863-81	s RES, CHIP 100 (1005)
R100	1-208-863-81	s RES, CHIP 100 (1005)
R101	1-208-863-81	s RES, CHIP 100 (1005)
R102	1-208-863-81	s RES, CHIP 100 (1005)
R103	1-220-870-81	s RES, CHIP 10 (1005)
RB1	1-234-381-21	s RES, NETWORK 100K (1005X4)
RB2	1-234-381-21	s RES, NETWORK 100K (1005X4)
RB3	1-234-381-21	s RES, NETWORK 100K (1005X4)
RB4	1-234-381-21	s RES, NETWORK 100K (1005X4)

ENC-112 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1707-917-A	s MOUNTED CIRCUIT BOARD, ENC-112
C100	1-112-815-91	s CAP, CERAMIC 10MF C (1608)
C101	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C102	1-112-298-91	o CAP, CERAMIC 1MF B (1608)
C103	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C104	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C105	1-112-298-91	o CAP, CERAMIC 1MF B (1608)
C106	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C107	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C108	1-112-298-91	o CAP, CERAMIC 1MF B (1608)
C109	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C110	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C111	1-112-298-91	o CAP, CERAMIC 1MF B (1608)
C112	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C113	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C114	1-112-815-91	s CAP, CERAMIC 10MF C (1608)
C115	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C116	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C117	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C118	1-112-298-91	o CAP, CERAMIC 1MF B (1608)
C119	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C120	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C121	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C122	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C123	1-112-298-91	o CAP, CERAMIC 1MF B (1608)
C124	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C125	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C126	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C127	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C128	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C129	1-112-815-91	s CAP, CERAMIC 10MF C (1608)
C130	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C131	1-112-298-91	o CAP, CERAMIC 1MF B (1608)
C132	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C133	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C134	1-112-298-91	o CAP, CERAMIC 1MF B (1608)
C135	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C136	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C137	1-112-298-91	o CAP, CERAMIC 1MF B (1608)
C138	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C139	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C140	1-112-298-91	o CAP, CERAMIC 1MF B (1608)
C141	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C142	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C143	1-112-298-91	o CAP, CERAMIC 1MF B (1608)
C144	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C145	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C146	1-112-298-91	o CAP, CERAMIC 1MF B (1608)
C147	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C148	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C149	1-112-815-91	s CAP, CERAMIC 10MF C (1608)
C150	1-112-815-91	s CAP, CERAMIC 10MF C (1608)
C151	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C152	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C153	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C154	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C155	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C156	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005

(ENC-112 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C157	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C158	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C159	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C160	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C161	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C162	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C163	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C164	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C165	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C166	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C167	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C168	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C169	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C170	1-112-815-91	s CAP, CERAMIC 10MF C (1608)
C171	1-112-815-91	s CAP, CERAMIC 10MF C (1608)
D100	6-502-197-01	s DI SML-D12M8WT86SM
D101	6-502-197-01	s DI SML-D12M8WT86SM
D102	6-502-197-01	s DI SML-D12M8WT86SM
FB100	1-469-094-21	s FERRITE, EMI (SMD) (1608)
FB101	1-469-094-21	s FERRITE, EMI (SMD) (1608)
FB102	1-469-094-21	s FERRITE, EMI (SMD) (1608)
IC100	8-753-276-37	o IC CXD3195AGG-T6
R100	1-220-878-81	s RES, CHIP 22 (1005)
R101	1-218-990-81	s CONDUCTOR, CHIP (1005)
R102	1-218-990-81	s CONDUCTOR, CHIP (1005)
R103	1-218-990-81	s CONDUCTOR, CHIP (1005)
R104	1-220-878-81	s RES, CHIP 22 (1005)
R105	1-220-878-81	s RES, CHIP 22 (1005)
R106	1-208-911-81	s RES, CHIP 10K (1005)
R107	1-220-878-81	s RES, CHIP 22 (1005)
R108	1-208-911-81	s RES, CHIP 10K (1005)
R109	1-208-911-81	s RES, CHIP 10K (1005)
R110	1-208-911-81	s RES, CHIP 10K (1005)
R111	1-208-911-81	s RES, CHIP 10K (1005)
R112	1-218-990-81	s CONDUCTOR, CHIP (1005)
R113	1-208-887-81	s RES, CHIP 1.0K (1005)
R114	1-208-887-81	s RES, CHIP 1.0K (1005)
R115	1-208-911-81	s RES, CHIP 10K (1005)
R118	1-220-878-81	s RES, CHIP 22 (1005)
R119	1-220-878-81	s RES, CHIP 22 (1005)
R120	1-220-878-81	s RES, CHIP 22 (1005)
R121	1-220-878-81	s RES, CHIP 22 (1005)
RB101	1-234-378-21	s RES, NETWORK 10K (1005X4)
RB102	1-234-378-21	s RES, NETWORK 10K (1005X4)
RB103	1-234-378-21	s RES, NETWORK 10K (1005X4)
RB105	1-234-376-21	s RES, NETWORK 2.2K (1005X4)
RB108	1-234-378-21	s RES, NETWORK 10K (1005X4)
RB109	1-234-378-21	s RES, NETWORK 10K (1005X4)
RB110	1-234-378-21	s RES, NETWORK 10K (1005X4)
RB111	1-234-370-21	s RES, NETWORK 22 (1005X4)
RB112	1-234-370-21	s RES, NETWORK 22 (1005X4)
RB113	1-234-370-21	s RES, NETWORK 22 (1005X4)
RB114	1-234-370-21	s RES, NETWORK 22 (1005X4)
RB115	1-234-370-21	s RES, NETWORK 22 (1005X4)
RB116	1-234-370-21	s RES, NETWORK 22 (1005X4)
RB117	1-234-370-21	s RES, NETWORK 22 (1005X4)
RB118	1-234-370-21	s RES, NETWORK 22 (1005X4)

(ENC-112 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
RB119	1-234-370-21	s RES, NETWORK 22 (1005X4)
RB120	1-234-370-21	s RES, NETWORK 22 (1005X4)
RB121	1-234-370-21	s RES, NETWORK 22 (1005X4)
RB122	1-234-370-21	s RES, NETWORK 22 (1005X4)
RB123	1-234-370-21	s RES, NETWORK 22 (1005X4)
RB124	1-234-370-21	s RES, NETWORK 22 (1005X4)
RB125	1-234-370-21	s RES, NETWORK 22 (1005X4)
RB126	1-234-370-21	s RES, NETWORK 22 (1005X4)

FL-348 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1708-275-A	s MOUNTED CIRCUIT BOARD, FL-348
2pcs	3-315-760-01	s SPACER (B)
C1	Δ 1-136-206-11	s CAP, METALIZED FILM 0.033MF
C2	Δ 1-136-206-11	s CAP, METALIZED FILM 0.033MF
C3	Δ 1-136-206-11	s CAP, METALIZED FILM 0.033MF
C4	Δ 1-136-200-11	s CAP, METALIZED FILM 0.15MF
C11	Δ 1-113-925-51	s CAP, CERAMIC 10000PF F
CN1	Δ 1-691-961-11	s PIN, CONNECTOR (PC BOARD) 3P
CN2	Δ 1-750-880-11	s RECEPTACLE, COAXIAL CONNECTOR
CN3	1-691-961-11	s PIN, CONNECTOR (PC BOARD) 3P
FB1	1-469-979-21	s INDUCTOR, FERRITE BEAD
FB2	1-469-979-21	s INDUCTOR, FERRITE BEAD
FB3	1-469-979-21	s INDUCTOR, FERRITE BEAD
FB4	1-469-979-21	s INDUCTOR, FERRITE BEAD
FB5	1-469-979-21	s INDUCTOR, FERRITE BEAD
FB6	1-469-979-21	s INDUCTOR, FERRITE BEAD
L1	1-410-283-11	s INDUCTOR (WITH CORE)
L2	1-410-283-11	s INDUCTOR (WITH CORE)
L3	1-416-831-11	s COIL, CHOK 100UH
L4	1-416-831-11	s COIL, CHOK 100UH
L5	1-416-831-11	s COIL, CHOK 100UH
L6	1-416-831-11	s COIL, CHOK 100UH
L7	1-416-831-11	s COIL, CHOK 100UH
L11	1-412-963-21	s INDUCTOR 100UH (2520)
L12	1-412-963-21	s INDUCTOR 100UH (2520)
TP1	1-780-318-11	s TERMINAL, LUG
TP2	1-780-318-11	s TERMINAL, LUG

LE-355 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1708-072-A	s MOUNTED CIRCUIT BOARD, LE-355
C1	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C2	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
CN1	1-785-946-21	s CONNECTOR 3P
CN2	1-785-900-21	s CONNECTOR 5P
D1	6-502-598-01	s DI SML-D12U8WT86
D2	6-501-358-01	s DIODE CL-197HG5-CD-T
D3	6-502-598-01	s DI SML-D12U8WT86
D4	6-501-358-01	s DIODE CL-197HG5-CD-T
FB1	1-400-832-21	s SMD EMI FERRITE
FB2	1-400-832-21	s SMD EMI FERRITE
FB3	1-400-832-21	s SMD EMI FERRITE
JC1	1-218-990-81	s CONDUCTOR, CHIP (1005)
JC2	1-218-990-81	s CONDUCTOR, CHIP (1005)
R4	1-208-875-81	s RES, CHIP 330 (1005)
R5	1-208-875-81	s RES, CHIP 330 (1005)
R6	1-208-883-81	s RES, CHIP 680 (1005)
R10	1-208-875-81	s RES, CHIP 330 (1005)
R11	1-208-875-81	s RES, CHIP 330 (1005)
R12	1-208-883-81	s RES, CHIP 680 (1005)
R13	1-208-875-81	s RES, CHIP 330 (1005)
R14	1-208-875-81	s RES, CHIP 330 (1005)
S1	1-570-608-11	s SWITCH, TOGGLE

MB-1125 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1708-075-A	s MOUNTED CIRCUIT BOARD, MB-1125
6pcs	3-729-061-02	s SCREW (M2) (TYPE 1)
C4	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C5	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C6	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C7	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C8	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C10	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C12	1-135-960-91	s CAP, CHIP CERAMIC 10MF B(3225)
C13	1-135-960-91	s CAP, CHIP CERAMIC 10MF B(3225)
C14	1-135-960-91	s CAP, CHIP CERAMIC 10MF B(3225)
C15	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C16	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C17	1-135-960-91	s CAP, CHIP CERAMIC 10MF B(3225)
C18	1-135-960-91	s CAP, CHIP CERAMIC 10MF B(3225)
C19	1-135-960-91	s CAP, CHIP CERAMIC 10MF B(3225)
C20	1-135-960-91	s CAP, CHIP CERAMIC 10MF B(3225)
C21	1-135-960-91	s CAP, CHIP CERAMIC 10MF B(3225)
C22	1-135-960-91	s CAP, CHIP CERAMIC 10MF B(3225)
CN1	1-817-318-21	s PIN, CONNECTOR 6P
CN3	1-794-142-31	s CONNECTOR, FFC/FPC(ZIF) AN 36P
CN5	1-778-534-31	s CONNECTOR, FFC/FPC(ZIF) ST 45P
CN6	1-779-806-21	s CONNECTOR 8P
CN7	1-784-629-21	o CONNECTOR, BOARD TO BOARD 30P
CN8	1-691-550-21	s PIN, CONNECTOR (1.5MM) (SMD) 3P
CN9	1-793-807-21	o PIN, CONNECTOR (WITH PWB) 20P
CN10	1-785-125-21	s CONNECTOR 6P
CN11	1-785-946-21	s CONNECTOR 3P
F1	Δ 1-576-488-21	s FUSE
FB1	1-400-832-21	s SMD EMI FERRITE
FB2	1-400-832-21	s SMD EMI FERRITE
FB3	1-400-832-21	s SMD EMI FERRITE
FB4	1-400-832-21	s SMD EMI FERRITE
FB5	1-400-832-21	s SMD EMI FERRITE
FB6	1-400-832-21	s SMD EMI FERRITE
L1	1-457-372-21	s COIL, CHOKE 1UH
L4	1-414-398-41	s INDUCTOR (SMD) 10.0UH
L5	1-414-392-41	s INDUCTOR (SMD) 1.0UH
L7	1-414-392-41	s INDUCTOR (SMD) 1.0UH
L8	1-414-392-41	s INDUCTOR (SMD) 1.0UH
L9	1-457-372-21	s COIL, CHOKE 1UH
L10	1-457-372-21	s COIL, CHOKE 1UH
L12	1-457-372-21	s COIL, CHOKE 1UH
L13	1-457-372-21	s COIL, CHOKE 1UH
L14	1-457-372-21	s COIL, CHOKE 1UH
L15	1-457-372-21	s COIL, CHOKE 1UH
L16	1-457-372-21	s COIL, CHOKE 1UH
L17	1-457-372-21	s COIL, CHOKE 1UH
L18	1-457-372-21	s COIL, CHOKE 1UH
L19	1-457-372-21	s COIL, CHOKE 1UH
L20	1-457-372-21	s COIL, CHOKE 1UH
L21	1-457-372-21	s COIL, CHOKE 1UH
L22	1-457-372-21	s COIL, CHOKE 1UH
L23	1-457-372-21	s COIL, CHOKE 1UH
L24	1-414-398-41	s INDUCTOR (SMD) 10.0UH
L25	1-414-398-41	s INDUCTOR (SMD) 10.0UH

(MB-1125 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
THP1	Δ 1-803-615-21	s THERMISTOR, POSITIVE
THP2	Δ 1-803-615-21	s THERMISTOR, POSITIVE
THP3	Δ 1-802-108-11	s THERMISTOR, POSITIVE

MS-91 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1708-080-A	s MOUNTED CIRCUIT BOARD, MS-91
C1	1-135-960-91	s CAP, CHIP CERAMIC 10MF B(3225)
C2	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C3	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C4	1-164-874-81	s CAP,CHIP CERAMIC 100PF CH 1005
C5	1-164-874-81	s CAP,CHIP CERAMIC 100PF CH 1005
C6	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C7	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C8	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C9	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C10	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C11	1-164-874-81	s CAP,CHIP CERAMIC 100PF CH 1005
C12	1-164-874-81	s CAP,CHIP CERAMIC 100PF CH 1005
C19	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C20	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
CN1	1-816-113-21	s CONNECTOR 15P
CN2	1-778-965-21	s CONNECTOR 12P
CN3	1-793-152-21	o CONNECTOR 11P
CN4	1-817-653-42	s MEMORY STICK CONNECTOR
CN5	1-816-562-31	s CONNECTOR, FFC/FPC(ZIF) ST 36P
CN6	1-785-946-21	s CONNECTOR 3P
D3	8-719-989-04	s DIODE DAN222-TL
D4	6-500-122-01	s DIODE CL-375HR/YG-D-TS
FB1	1-400-832-21	s SMD EMI FERRITE
FB2	1-400-832-21	s SMD EMI FERRITE
IC1	6-712-297-01	s IC PCA9555DBR
IC2	6-712-297-01	s IC PCA9555DBR
IC3	6-711-237-01	s IC NJM2878F3-33 (TE2)
IC4	6-706-476-01	s IC TC7SET04FU(T5RSOJF)
IC5	6-706-476-01	s IC TC7SET04FU(T5RSOJF)
IC6	6-711-116-01	s IC NJM2878F3-05 (TE2)
Q3	8-729-928-91	s TRANSISTOR DTC114EE-TL
Q4	8-729-928-91	s TRANSISTOR DTC114EE-TL
R1	1-208-887-81	s RES, CHIP 1.0K (1005)
R2	1-208-887-81	s RES, CHIP 1.0K (1005)
R3	1-208-879-81	s RES, CHIP 470 (1005)
R4	1-208-879-81	s RES, CHIP 470 (1005)
R5	1-208-855-81	s RES, CHIP 47 (1005)
R6	1-208-855-81	s RES, CHIP 47 (1005)
R7	1-208-887-81	s RES, CHIP 1.0K (1005)
R8	1-208-887-81	s RES, CHIP 1.0K (1005)
R10	1-208-855-81	s RES, CHIP 47 (1005)
R11	1-208-855-81	s RES, CHIP 47 (1005)
R12	1-208-887-81	s RES, CHIP 1.0K (1005)
RB7	1-234-370-21	s RES, NETWORK 22 (1005X4)
RB8	1-234-370-21	s RES, NETWORK 22 (1005X4)

NR-80 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1708-086-A	s MOUNTED CIRCUIT BOARD, NR-80
C4	1-100-159-91	s CAP, CERAMIC 22MF B (SMD) 3216
C5	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C8	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C9	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C10	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C11	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C12	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C13	1-114-548-11	s CAP, NIOBIUM ELECT 22UF
C14	1-114-548-11	s CAP, NIOBIUM ELECT 22UF
C15	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C16	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C17	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C18	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C19	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C20	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C21	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C22	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C23	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C24	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C25	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C26	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C27	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C28	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C29	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C30	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C31	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C32	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C33	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C34	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C35	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C36	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C37	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C38	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C39	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C40	1-114-548-11	s CAP, NIOBIUM ELECT 22UF
C41	1-114-548-11	s CAP, NIOBIUM ELECT 22UF
C49	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C50	1-165-884-91	s CAP, CERAMIC 2.2MF (1608)
C51	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C52	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C53	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C54	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C55	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C56	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C57	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C58	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C59	1-114-548-11	s CAP, NIOBIUM ELECT 22UF
C60	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C61	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C62	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C63	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C64	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C65	1-164-858-81	s CAP, CHIP CERAMIC 22PF CH 1005
C68	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C69	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C70	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C71	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005

(NR-80 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C75	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C76	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C77	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C78	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C82	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C83	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C84	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C85	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C86	1-164-842-81	s CAP,CHIP CERAMIC 2.0PF CK 1005
C87	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C88	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C89	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C90	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C93	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C94	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C95	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C96	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C97	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C98	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C99	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C100	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C101	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C104	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C105	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C106	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C107	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C108	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C109	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C110	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C111	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C112	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
CN1	1-794-142-31	s CONNECTOR, FFC/FPC(ZIF) AN 36P
CN2	1-778-645-31	s CONNECTOR, FFC/FPC(ZIF) AN 10P
D1	8-719-989-04	s DIODE DAN222-TL
FB1	1-469-108-21	s FERRITE, EMI (SMD) (1608)
IC3	6-711-696-01	s IC CY62256VNULL-70ZXCT
IC5	6-712-631-01	s IC CAT24C256XI-T2C
IC6	8-759-669-67	s IC TL074CPWR-12
IC7	8-759-561-46	s IC AD8014ARTZ-REEL7
IC8	8-759-561-46	s IC AD8014ARTZ-REEL7
IC9	6-706-358-01	s IC AD5424YCPZ-REEL7
IC10	8-759-592-47	s IC TC7SZ08FU(TE85R)
IC11	6-704-099-01	s IC TC7WZ08FK(TE85R)
IC12	8-759-327-01	s IC NJM062V(TE2)
IC13	6-705-673-01	s IC TC7PA53FU(TE85L.F)
IC14	6-705-673-01	s IC TC7PA53FU(TE85L.F)
IC15	8-759-561-46	s IC AD8014ARTZ-REEL7
IC16	8-759-561-46	s IC AD8014ARTZ-REEL7
IC17	8-759-561-46	s IC AD8014ARTZ-REEL7
IC18	6-705-673-01	s IC TC7PA53FU(TE85L.F)
IC19	6-704-099-01	s IC TC7WZ08FK(TE85R)
IC20	6-705-673-01	s IC TC7PA53FU(TE85L.F)
IC21	8-759-561-46	s IC AD8014ARTZ-REEL7
IC22	8-759-561-46	s IC AD8014ARTZ-REEL7
IC23	6-705-673-01	s IC TC7PA53FU(TE85L.F)
IC24	6-704-099-01	s IC TC7WZ08FK(TE85R)

(NR-80 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
IC25	6-705-673-01	s IC TC7PA53FU(TE85L.F)
IC26	8-759-561-46	s IC AD8014ARTZ-REEL7
IC27	8-759-561-46	s IC AD8014ARTZ-REEL7
L1	1-414-398-41	s INDUCTOR (SMD) 10.0UH
L2	1-414-392-41	s INDUCTOR (SMD) 1.0UH
L3	1-414-392-41	s INDUCTOR (SMD) 1.0UH
R1	1-220-870-81	s RES, CHIP 10 (1005)
R2	1-220-870-81	s RES, CHIP 10 (1005)
R3	1-220-870-81	s RES, CHIP 10 (1005)
R7	1-218-990-81	s CONDUCTOR, CHIP (1005)
R8	1-218-990-81	s CONDUCTOR, CHIP (1005)
R9	1-218-990-81	s CONDUCTOR, CHIP (1005)
R10	1-218-990-81	s CONDUCTOR, CHIP (1005)
R11	1-218-990-81	s CONDUCTOR, CHIP (1005)
R17	1-218-990-81	s CONDUCTOR, CHIP (1005)
R18	1-208-863-81	s RES, CHIP 100 (1005)
R20	1-218-990-81	s CONDUCTOR, CHIP (1005)
R21	1-218-990-81	s CONDUCTOR, CHIP (1005)
R22	1-208-911-81	s RES, CHIP 10K (1005)
R23	1-208-911-81	s RES, CHIP 10K (1005)
R24	1-208-863-81	s RES, CHIP 100 (1005)
R25	1-208-863-81	s RES, CHIP 100 (1005)
R27	1-208-919-81	s RES, CHIP 22K (1005)
R28	1-208-895-81	s RES, CHIP 2.2K (1005)
R29	1-208-895-81	s RES, CHIP 2.2K (1005)
R30	1-208-895-81	s RES, CHIP 2.2K (1005)
R31	1-208-879-81	s RES, CHIP 470 (1005)
R32	1-208-879-81	s RES, CHIP 470 (1005)
R33	1-208-879-81	s RES, CHIP 470 (1005)
R34	1-208-863-81	s RES, CHIP 100 (1005)
R35	1-208-863-81	s RES, CHIP 100 (1005)
R36	1-208-863-81	s RES, CHIP 100 (1005)
R37	1-208-927-81	s RES, CHIP 47K (1005)
R38	1-208-911-81	s RES, CHIP 10K (1005)
R39	1-208-899-81	s RES, CHIP 3.3K (1005)
R40	1-220-882-81	s RES, CHIP 33 (1005)
R41	1-220-882-81	s RES, CHIP 33 (1005)
R42	1-220-882-81	s RES, CHIP 33 (1005)
R46	1-208-867-81	s RES, CHIP 150 (1005)
R47	1-208-863-81	s RES, CHIP 100 (1005)
R49	1-218-990-81	s CONDUCTOR, CHIP (1005)
R51	1-218-990-81	s CONDUCTOR, CHIP (1005)
R53	1-218-990-81	s CONDUCTOR, CHIP (1005)
R54	1-208-887-81	s RES, CHIP 1.0K (1005)
R55	1-218-990-81	s CONDUCTOR, CHIP (1005)
R56	1-218-990-81	s CONDUCTOR, CHIP (1005)
R57	1-218-990-81	s CONDUCTOR, CHIP (1005)
R58	1-208-887-81	s RES, CHIP 1.0K (1005)
R59	1-208-911-81	s RES, CHIP 10K (1005)
R60	1-208-911-81	s RES, CHIP 10K (1005)
R61	1-208-927-81	s RES, CHIP 47K (1005)
R62	1-208-863-81	s RES, CHIP 100 (1005)
R63	1-208-863-81	s RES, CHIP 100 (1005)
R64	1-208-863-81	s RES, CHIP 100 (1005)
R65	1-208-863-81	s RES, CHIP 100 (1005)
R69	1-208-863-81	s RES, CHIP 100 (1005)
R72	1-208-915-81	s RES, CHIP 15K (1005)
R73	1-218-990-81	s CONDUCTOR, CHIP (1005)

(NR-80 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R74	1-218-990-81	s CONDUCTOR, CHIP (1005)
R75	1-218-990-81	s CONDUCTOR, CHIP (1005)
R76	1-208-911-81	s RES, CHIP 10K (1005)
R77	1-220-878-81	s RES, CHIP 22 (1005)
R78	1-218-990-81	s CONDUCTOR, CHIP (1005)
R79	1-220-878-81	s RES, CHIP 22 (1005)
R80	1-218-990-81	s CONDUCTOR, CHIP (1005)
R81	1-218-990-81	s CONDUCTOR, CHIP (1005)
R82	1-218-990-81	s CONDUCTOR, CHIP (1005)
R83	1-218-990-81	s CONDUCTOR, CHIP (1005)
R87	1-220-870-81	s RES, CHIP 10 (1005)
R88	1-220-870-81	s RES, CHIP 10 (1005)
R89	1-220-870-81	s RES, CHIP 10 (1005)
R90	1-208-895-81	s RES, CHIP 2.2K (1005)
R91	1-208-911-81	s RES, CHIP 10K (1005)
R93	1-208-911-81	s RES, CHIP 10K (1005)
R94	1-218-990-81	s CONDUCTOR, CHIP (1005)
R95	1-218-990-81	s CONDUCTOR, CHIP (1005)
R96	1-218-990-81	s CONDUCTOR, CHIP (1005)
R97	1-220-870-81	s RES, CHIP 10 (1005)
R98	1-220-878-81	s RES, CHIP 22 (1005)
R99	1-208-887-81	s RES, CHIP 1.0K (1005)
R100	1-208-887-81	s RES, CHIP 1.0K (1005)
R104	1-220-870-81	s RES, CHIP 10 (1005)
R105	1-220-870-81	s RES, CHIP 10 (1005)
R106	1-220-870-81	s RES, CHIP 10 (1005)
R107	1-208-863-81	s RES, CHIP 100 (1005)
R108	1-208-887-81	s RES, CHIP 1.0K (1005)
R109	1-208-887-81	s RES, CHIP 1.0K (1005)
R110	1-208-863-81	s RES, CHIP 100 (1005)
R111	1-208-863-81	s RES, CHIP 100 (1005)
R114	1-208-863-81	s RES, CHIP 100 (1005)
R115	1-208-863-81	s RES, CHIP 100 (1005)
R120	1-218-990-81	s CONDUCTOR, CHIP (1005)
R121	1-218-990-81	s CONDUCTOR, CHIP (1005)
R122	1-220-878-81	s RES, CHIP 22 (1005)
R123	1-218-990-81	s CONDUCTOR, CHIP (1005)
R124	1-220-878-81	s RES, CHIP 22 (1005)
R125	1-218-990-81	s CONDUCTOR, CHIP (1005)
R126	1-208-895-81	s RES, CHIP 2.2K (1005)
R127	1-208-911-81	s RES, CHIP 10K (1005)
R129	1-208-911-81	s RES, CHIP 10K (1005)
R130	1-208-887-81	s RES, CHIP 1.0K (1005)
R131	1-208-887-81	s RES, CHIP 1.0K (1005)
R132	1-208-887-81	s RES, CHIP 1.0K (1005)
R133	1-208-887-81	s RES, CHIP 1.0K (1005)
R134	1-208-863-81	s RES, CHIP 100 (1005)
R135	1-208-863-81	s RES, CHIP 100 (1005)
R138	1-208-863-81	s RES, CHIP 100 (1005)
R139	1-208-863-81	s RES, CHIP 100 (1005)
R144	1-218-990-81	s CONDUCTOR, CHIP (1005)
R145	1-218-990-81	s CONDUCTOR, CHIP (1005)
R146	1-220-878-81	s RES, CHIP 22 (1005)
R147	1-218-990-81	s CONDUCTOR, CHIP (1005)
R148	1-220-878-81	s RES, CHIP 22 (1005)
R149	1-218-990-81	s CONDUCTOR, CHIP (1005)
R150	1-208-895-81	s RES, CHIP 2.2K (1005)
R151	1-208-911-81	s RES, CHIP 10K (1005)
R153	1-208-911-81	s RES, CHIP 10K (1005)

(NR-80 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R154	1-208-887-81	s RES, CHIP 1.0K (1005)
R155	1-208-887-81	s RES, CHIP 1.0K (1005)
R156	1-208-887-81	s RES, CHIP 1.0K (1005)
R157	1-208-887-81	s RES, CHIP 1.0K (1005)
R158	1-208-863-81	s RES, CHIP 100 (1005)
R159	1-208-863-81	s RES, CHIP 100 (1005)
R162	1-208-863-81	s RES, CHIP 100 (1005)
R163	1-218-929-81	s RES, CHIP 10

PA-353 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C1	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C2	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C3	1-112-298-91	o CAP, CERAMIC 1MF B (1608)
C4	1-100-816-21	s CAP, ELECT 33MF (5.6X6.5)
C5	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C6	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C7	1-112-298-91	o CAP, CERAMIC 1MF B (1608)
C8	1-100-816-21	s CAP, ELECT 33MF (5.6X6.5)
C9	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C10	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C11	1-100-159-91	s CAP, CERAMIC 22MF B (SMD) 3216
C12	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C15	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C16	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C17	1-165-629-91	s CAP, CERAMIC 1000000PF B(3225)
C18	1-165-629-91	s CAP, CERAMIC 1000000PF B(3225)
C19	1-165-629-91	s CAP, CERAMIC 1000000PF B(3225)
C20	1-165-629-91	s CAP, CERAMIC 1000000PF B(3225)
C21	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C22	1-135-960-91	s CAP, CHIP CERAMIC 10MF B(3225)
C23	1-135-960-91	s CAP, CHIP CERAMIC 10MF B(3225)
C24	1-112-300-91	s CAP, CERAMIC 4.7MF B (2012)
C25	1-112-300-91	s CAP, CERAMIC 4.7MF B (2012)
C26	1-112-300-91	s CAP, CERAMIC 4.7MF B (2012)
C27	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C28	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C29	1-112-300-91	s CAP, CERAMIC 4.7MF B (2012)
C30	1-112-300-91	s CAP, CERAMIC 4.7MF B (2012)
C31	1-135-349-21	s CAP, ELECT 22MF (6.3X6)
C32	1-135-960-91	s CAP, CHIP CERAMIC 10MF B(3225)
C33	1-164-840-81	s CAP, CHIP CERAMIC 1PF CK 1005
C34	1-164-840-81	s CAP, CHIP CERAMIC 1PF CK 1005
C35	1-135-960-91	s CAP, CHIP CERAMIC 10MF B(3225)
C36	1-135-960-91	s CAP, CHIP CERAMIC 10MF B(3225)
C37	1-112-298-91	o CAP, CERAMIC 1MF B (1608)
C38	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C39	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C40	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C41	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C42	1-112-298-91	o CAP, CERAMIC 1MF B (1608)
C45	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C46	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C47	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C48	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C49	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C50	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C51	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C52	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C53	1-165-871-21	s CAP, ELECT 22MF (4.0X5.5)
C54	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C55	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C56	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C57	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C58	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C59	1-100-159-91	s CAP, CERAMIC 22MF B (SMD) 3216
C60	1-164-845-81	s CAP, CHIP CERAMIC 5PF CH 1005
C61	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C62	1-165-871-21	s CAP, ELECT 22MF (4.0X5.5)
C63	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005

(PA-353 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C64	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C65	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C66	1-100-159-91	s CAP, CERAMIC 22MF B (SMD) 3216
C67	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C68	1-165-989-91	s CAP, CERAMIC 10MF (2012)
CN1	1-778-652-31	s CONNECTOR, FFC (ZIF) 50P
D1	8-719-056-48	s DIODE 1SS388(TPL3)
D2	8-719-056-48	s DIODE 1SS388(TPL3)
D3	8-719-989-04	s DIODE DAN222-TL
D4	8-719-989-04	s DIODE DAN222-TL
D5	8-719-210-46	s DIODE EC10QS-06-TE12L
FB1	1-469-122-21	s FERRITE, EMI (SMD) (1608)
FB2	1-469-122-21	s FERRITE, EMI (SMD) (1608)
FB3	1-400-334-21	s FERRITE, EMI (SMD) (1608)
FB4	1-400-334-21	s FERRITE, EMI (SMD) (1608)
FB5	1-469-122-21	s FERRITE, EMI (SMD) (1608)
IC3	6-706-863-01	s IC LMH6732MPX/NOPB
IC4	6-706-863-01	s IC LMH6732MPX/NOPB
IC5	8-753-240-64	s IC CXA3647CR-T4
IC6	8-759-346-27	s IC LM45BIM3X
Q1	8-729-809-73	s TRANSISTOR 2SK536-TB
R3	1-244-161-81	s RES, CHIP 2.2 (1005)
R4	1-244-161-81	s RES, CHIP 2.2 (1005)
R5	1-208-935-81	s RES, CHIP 100K (1005)
R6	1-218-990-81	s CONDUCTOR, CHIP (1005)
R7	1-218-990-81	s CONDUCTOR, CHIP (1005)
R8	1-208-911-81	s RES, CHIP 10K (1005)
R9	1-208-911-81	s RES, CHIP 10K (1005)
R10	1-208-895-81	s RES, CHIP 2.2K (1005)
R11	1-208-903-81	s RES, CHIP 4.7K (1005)
R12	1-208-919-81	s RES, CHIP 22K (1005)
R13	1-208-911-81	s RES, CHIP 10K (1005)
R14	1-208-895-81	s RES, CHIP 2.2K (1005)
R15	1-208-935-81	s RES, CHIP 100K (1005)
R16	1-208-935-81	s RES, CHIP 100K (1005)
R17	1-208-959-81	s RES, CHIP 1M (1005)
R18	1-208-863-81	s RES, CHIP 100 (1005)
R19	1-218-990-81	s CONDUCTOR, CHIP (1005)
R20	1-208-959-81	s RES, CHIP 1M (1005)
R21	1-208-855-81	s RES, CHIP 47 (1005)
R22	1-218-990-81	s CONDUCTOR, CHIP (1005)
R23	1-218-990-81	s CONDUCTOR, CHIP (1005)
R24	1-208-875-81	s RES, CHIP 330 (1005)
R27	1-208-875-81	s RES, CHIP 330 (1005)
R30	1-208-919-81	s RES, CHIP 22K (1005)
R31	1-208-903-81	s RES, CHIP 4.7K (1005)
R32	1-208-919-81	s RES, CHIP 22K (1005)
R33	1-208-887-81	s RES, CHIP 1.0K (1005)
R34	1-208-919-81	s RES, CHIP 22K (1005)
R35	1-220-878-81	s RES, CHIP 22 (1005)
R36	1-220-878-81	s RES, CHIP 22 (1005)
R37	1-208-931-81	s RES, CHIP 68K (1005)
R38	1-208-931-81	s RES, CHIP 68K (1005)
R39	1-208-863-81	s RES, CHIP 100 (1005)
R40	1-208-863-81	s RES, CHIP 100 (1005)
R41	1-208-887-81	s RES, CHIP 1.0K (1005)
R42	1-208-887-81	s RES, CHIP 1.0K (1005)

(PA-353 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R43	1-208-871-81	s RES, CHIP 220 (1005)
R44	1-208-871-81	s RES, CHIP 220 (1005)
R45	1-208-935-81	s RES, CHIP 100K (1005)
R46	1-208-935-81	s RES, CHIP 100K (1005)
R47	1-208-879-81	s RES, CHIP 470 (1005)
R48	1-208-879-81	s RES, CHIP 470 (1005)
R49	1-220-870-81	s RES, CHIP 10 (1005)
R50	1-220-870-81	s RES, CHIP 10 (1005)
R51	1-208-895-81	s RES, CHIP 2.2K (1005)
R52	1-208-887-81	s RES, CHIP 1.0K (1005)
R53	1-208-911-81	s RES, CHIP 10K (1005)
R56	1-218-990-81	s CONDUCTOR, CHIP (1005)
R57	1-208-879-81	s RES, CHIP 470 (1005)
R58	1-208-911-81	s RES, CHIP 10K (1005)
R59	1-218-990-81	s CONDUCTOR, CHIP (1005)
R60	1-208-855-81	s RES, CHIP 47 (1005)
R61	1-208-855-81	s RES, CHIP 47 (1005)
R62	1-208-855-81	s RES, CHIP 47 (1005)
R63	1-218-990-81	s CONDUCTOR, CHIP (1005)
R64	1-208-855-81	s RES, CHIP 47 (1005)
R65	1-208-855-81	s RES, CHIP 47 (1005)
R66	1-208-855-81	s RES, CHIP 47 (1005)
R67	1-208-855-81	s RES, CHIP 47 (1005)
R68	1-208-855-81	s RES, CHIP 47 (1005)
R70	1-218-929-81	s RES, CHIP 10
R71	1-208-887-81	s RES, CHIP 1.0K (1005)
R72	1-208-887-81	s RES, CHIP 1.0K (1005)
R75	1-208-907-81	s RES, CHIP 6.8K (1005)
R76	1-208-895-81	s RES, CHIP 2.2K (1005)
R80	1-208-871-81	s RES, CHIP 220 (1005)
R81	1-208-883-81	s RES, CHIP 680 (1005)

SW-1402 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1708-081-A	s MOUNTED CIRCUIT BOARD, SW-1402
C1	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C2	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
CN1	1-770-620-21	s PIN, CONNECTOR 3P
FB1	1-400-832-21	s SMD EMI FERRITE
R1	1-208-879-81	s RES, CHIP 470 (1005)
R2	1-208-879-81	s RES, CHIP 470 (1005)
R3	1-208-879-81	s RES, CHIP 470 (1005)
R4	1-208-879-81	s RES, CHIP 470 (1005)
S1	1-786-725-21	s SWITCH, TACTILE
S2	1-786-725-21	s SWITCH, TACTILE

SW-1403 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1708-073-A	s MOUNTED CIRCUIT BOARD, SW-1403
C1	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C2	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
CN1	1-770-620-21	s PIN, CONNECTOR 3P
FB1	1-400-832-21	s SMD EMI FERRITE
R1	1-208-879-81	s RES, CHIP 470 (1005)
R2	1-208-879-81	s RES, CHIP 470 (1005)
R3	1-208-879-81	s RES, CHIP 470 (1005)
R4	1-208-879-81	s RES, CHIP 470 (1005)
S1	1-786-725-21	s SWITCH, TACTILE
S2	1-786-725-21	s SWITCH, TACTILE

SW-1404 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1708-082-A	s MOUNTED CIRCUIT BOARD, SW-1404
C1	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C2	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C3	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C4	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C5	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C6	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C7	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C8	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C9	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C10	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
CN1	1-770-628-21	s PIN, CONNECTOR 11P
R1	1-208-887-81	s RES, CHIP 1.0K (1005)
R2	1-208-887-81	s RES, CHIP 1.0K (1005)
R3	1-208-887-81	s RES, CHIP 1.0K (1005)
R4	1-208-887-81	s RES, CHIP 1.0K (1005)
R5	1-208-887-81	s RES, CHIP 1.0K (1005)
R6	1-208-887-81	s RES, CHIP 1.0K (1005)
R7	1-208-887-81	s RES, CHIP 1.0K (1005)
R8	1-208-887-81	s RES, CHIP 1.0K (1005)
R9	1-208-887-81	s RES, CHIP 1.0K (1005)
R10	1-208-887-81	s RES, CHIP 1.0K (1005)
S1	1-762-123-21	s SWITCH, TOGGLE
S2	1-762-123-21	s SWITCH, TOGGLE
S3	1-762-123-21	s SWITCH, TOGGLE
S4	1-762-019-21	s SWITCH, TOGGLE
S5	1-762-489-21	s SWITCH, TOGGLE

SW-1405 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1708-083-A	s MOUNTED CIRCUIT BOARD, SW-1405
C1	1-164-939-81	s CAP, CHIPCERAMIC 2200PF B 1005
C2	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C3	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C4	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C5	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C7	1-164-939-81	s CAP, CHIPCERAMIC 2200PF B 1005
C8	1-164-939-81	s CAP, CHIPCERAMIC 2200PF B 1005
C9	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C10	1-164-939-81	s CAP, CHIPCERAMIC 2200PF B 1005
C11	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
CN2	1-770-629-21	s PIN, CONNECTOR 12P
EN1	1-487-191-11	s ENCODER, ROTARY
R1	1-208-887-81	s RES, CHIP 1.0K (1005)
R2	1-208-887-81	s RES, CHIP 1.0K (1005)
R3	1-208-887-81	s RES, CHIP 1.0K (1005)
R4	1-218-990-81	s CONDUCTOR, CHIP (1005)
R5	1-208-887-81	s RES, CHIP 1.0K (1005)
R6	1-208-887-81	s RES, CHIP 1.0K (1005)
R7	1-208-871-81	s RES, CHIP 220 (1005)
R8	1-208-871-81	s RES, CHIP 220 (1005)
R9	1-208-871-81	s RES, CHIP 220 (1005)
R10	1-218-990-81	s CONDUCTOR, CHIP (1005)
RV1	1-227-244-11	s RES, VAR, CARBON 5K/5K
S1	1-570-282-21	s SWITCH, KEY BOARD
S2	1-762-124-21	s SWITCH, TOGGLE
S3	1-762-531-21	s SWITCH, TOGGLE

SW-1406/A BOARD

*UCJ: [HSC-300(UC,J)]
*CE: [HSC-300(CE)]

Ref. No. or Q'ty	Part No.	SP Description
1pc	*UCJ A-1708-088-A	s MOUNTED CIRCUIT BOARD, SW-1406
1pc	*CE A-1708-274-A	s MOUNTED CIRCUIT BOARD, SW-1406A
C1	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C2	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C3	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C4	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C5	1-164-939-81	s CAP, CHIPCERAMIC 2200PF B 1005
C6	1-164-939-81	s CAP, CHIPCERAMIC 2200PF B 1005
C7	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C8	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C9	1-164-939-81	s CAP, CHIPCERAMIC 2200PF B 1005
C10	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C11	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C12	1-164-939-81	s CAP, CHIPCERAMIC 2200PF B 1005
C13	1-164-939-81	s CAP, CHIPCERAMIC 2200PF B 1005
C14	1-164-939-81	s CAP, CHIPCERAMIC 2200PF B 1005
C15	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C16	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C17	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C18	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C19	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C20	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C21	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C22	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C23	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
CN1	1-774-261-31	s CONNECTOR, FFC/FPC(ZIF) AN 24P
EN1	1-480-630-11	s ENCODER, ROTARY
R1	*UCJ 1-208-871-81	s RES, CHIP 220 (1005)
R3	1-208-887-81	s RES, CHIP 1.0K (1005)
R4	1-208-887-81	s RES, CHIP 1.0K (1005)
R5	1-208-887-81	s RES, CHIP 1.0K (1005)
R6	1-208-887-81	s RES, CHIP 1.0K (1005)
R7	1-208-887-81	s RES, CHIP 1.0K (1005)
R8	1-208-887-81	s RES, CHIP 1.0K (1005)
R9	1-208-887-81	s RES, CHIP 1.0K (1005)
R10	1-208-887-81	s RES, CHIP 1.0K (1005)
R11	1-208-887-81	s RES, CHIP 1.0K (1005)
R12	1-208-887-81	s RES, CHIP 1.0K (1005)
R13	1-208-871-81	s RES, CHIP 220 (1005)
R14	1-208-871-81	s RES, CHIP 220 (1005)
R15	1-208-871-81	s RES, CHIP 220 (1005)
R16	1-208-863-81	s RES, CHIP 100 (1005)
R17	1-208-863-81	s RES, CHIP 100 (1005)
R18	1-218-990-81	s CONDUCTOR, CHIP (1005)
R19	1-208-867-81	s RES, CHIP 150 (1005)
R21	1-208-883-81	s RES, CHIP 680 (1005)
R22	1-208-863-81	s RES, CHIP 100 (1005)
R23	1-208-863-81	s RES, CHIP 100 (1005)
R24	1-218-990-81	s CONDUCTOR, CHIP (1005)
R25	1-218-990-81	s CONDUCTOR, CHIP (1005)
R28	1-208-863-81	s RES, CHIP 100 (1005)
R29	1-218-990-81	s CONDUCTOR, CHIP (1005)
RV1	1-237-696-11	s RES, VAR, CARBON 5K
RV2	1-237-696-11	s RES, VAR, CARBON 5K

(SW-1406/A BOARD)

Ref. No. or Q'ty	Part No.	SP Description
RV3	1-237-696-11	s RES, VAR, CARBON 5K
RV4	*CE 1-237-696-11	s RES, VAR, CARBON 5K
RV5	*CE 1-237-696-11	s RES, VAR, CARBON 5K
S1	1-771-316-21	s SWITCH, TOGGLE
S2	1-570-608-11	s SWITCH, TOGGLE
S3	1-786-725-21	s SWITCH, TACTILE
S4	1-786-725-21	s SWITCH, TACTILE
S5	1-771-316-21	s SWITCH, TOGGLE
S6	1-786-725-21	s SWITCH, TACTILE
S7	1-771-316-21	s SWITCH, TOGGLE

SW-1407 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1708-084-A	s MOUNTED CIRCUIT BOARD, SW-1407
C1	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C2	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C3	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C4	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C5	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C6	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
CN1	1-770-623-21	s PIN, CONNECTOR 6P
D1	6-502-598-01	s DI SML-D12U8WT86
D2	6-501-358-01	s DIODE CL-197HG5-CD-T
R1	1-208-887-81	s RES, CHIP 1.0K (1005)
R2	1-208-887-81	s RES, CHIP 1.0K (1005)
R3	1-208-863-81	s RES, CHIP 100 (1005)
R4	1-208-855-81	s RES, CHIP 47 (1005)
R5	1-208-855-81	s RES, CHIP 47 (1005)
S1	1-771-316-21	s SWITCH, TOGGLE

SY-363 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1707-921-A	s MOUNTED CIRCUIT BOARD, SY-363
3pcs	3-729-061-02	s SCREW (M2) (TYPE 1)
BT101	1-756-076-21	s HOLDER, LITHIUM BATTERY
C1	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C2	1-100-055-21	s CAP, CHIP CERAMIC 22MF B 3225
C3	1-112-298-91	o CAP, CERAMIC 1MF B (1608)
C4	1-112-015-91	s CAP, CHIP CERAMIC 47MF B 3225
C5	1-112-015-91	s CAP, CHIP CERAMIC 47MF B 3225
C8	1-112-298-91	o CAP, CERAMIC 1MF B (1608)
C9	1-164-874-81	s CAP,CHIP CERAMIC 100PF CH 1005
C11	1-164-874-81	s CAP,CHIP CERAMIC 100PF CH 1005
C12	1-100-505-91	s CAP, CERAMIC 0.1MF C (1005)
C13	1-100-505-91	s CAP, CERAMIC 0.1MF C (1005)
C14	1-112-015-91	s CAP, CHIP CERAMIC 47MF B 3225
C15	1-112-015-91	s CAP, CHIP CERAMIC 47MF B 3225
C16	1-112-015-91	s CAP, CHIP CERAMIC 47MF B 3225
C18	1-112-298-91	o CAP, CERAMIC 1MF B (1608)
C19	1-164-874-81	s CAP,CHIP CERAMIC 100PF CH 1005
C20	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C21	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C22	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C23	1-100-055-21	s CAP, CHIP CERAMIC 22MF B 3225
C24	1-100-055-21	s CAP, CHIP CERAMIC 22MF B 3225
C25	1-100-055-21	s CAP, CHIP CERAMIC 22MF B 3225
C28	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C30	1-164-874-81	s CAP,CHIP CERAMIC 100PF CH 1005
C31	1-112-015-91	s CAP, CHIP CERAMIC 47MF B 3225
C32	1-112-015-91	s CAP, CHIP CERAMIC 47MF B 3225
C33	1-112-015-91	s CAP, CHIP CERAMIC 47MF B 3225
C34	1-112-692-81	s CAP,CHIP CERAMIC1000PF CH 1005
C36	1-100-505-91	s CAP, CERAMIC 0.1MF C (1005)
C37	1-100-505-91	s CAP, CERAMIC 0.1MF C (1005)
C38	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C42	1-112-015-91	s CAP, CHIP CERAMIC 47MF B 3225
C43	1-100-505-91	s CAP, CERAMIC 0.1MF C (1005)
C45	1-112-015-91	s CAP, CHIP CERAMIC 47MF B 3225
C46	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C47	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C48	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C49	1-126-400-21	s CAP, CHIP ELECT 22MF (6.3X5.7)
C50	1-126-400-21	s CAP, CHIP ELECT 22MF (6.3X5.7)
C51	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C52	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C53	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C107	1-112-298-91	o CAP, CERAMIC 1MF B (1608)
C109	1-164-858-81	s CAP, CHIP CERAMIC 22PF CH 1005
C110	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C111	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C112	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C113	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C114	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C115	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C116	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C117	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C118	1-114-999-11	s CAP, DOUBLE LAYERS 0.22F
C119	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C120	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C121	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005

(SY-363 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C122	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C123	1-100-055-21	s CAP, CHIP CERAMIC 22MF B 3225
C124	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C125	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C126	1-112-298-91	o CAP, CERAMIC 1MF B (1608)
C127	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C128	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C129	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C130	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C131	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C132	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C133	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C134	1-164-935-81	s CAP, CHIP CERAMIC 470PF B 1005
C135	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C136	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C137	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C138	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C139	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C140	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C141	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C142	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C143	1-119-923-81	s CAP, CERAMIC 0.047MF B 1005
C144	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C145	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C146	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C147	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C148	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C149	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C150	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C151	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C152	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C153	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C154	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C155	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C156	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C157	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C158	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C159	1-100-055-21	s CAP, CHIP CERAMIC 22MF B 3225
C160	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C161	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C162	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C163	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C164	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C165	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C166	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C167	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C168	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C169	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C170	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C171	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C172	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C173	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C175	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C176	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C180	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C181	1-100-055-21	s CAP, CHIP CERAMIC 22MF B 3225
C182	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C183	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C184	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005

(SY-363 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C185	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C186	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C187	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C188	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C190	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C191	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C192	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C193	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C194	1-164-858-81 s	CAP, CHIP CERAMIC 22PF CH 1005
C195	1-164-850-81 s	CAP, CHIP CERAMIC 10PF CH 1005
C196	1-100-055-21 s	CAP, CHIP CERAMIC 22MF B 3225
C197	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C201	1-112-298-91 o	CAP, CERAMIC 1MF B (1608)
C202	1-112-298-91 o	CAP, CERAMIC 1MF B (1608)
C203	1-112-298-91 o	CAP, CERAMIC 1MF B (1608)
C204	1-112-298-91 o	CAP, CERAMIC 1MF B (1608)
C205	1-112-298-91 o	CAP, CERAMIC 1MF B (1608)
C206	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C207	1-112-298-91 o	CAP, CERAMIC 1MF B (1608)
C208	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C209	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C210	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C211	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C212	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C213	1-164-939-81 s	CAP, CHIP CERAMIC 2200PF B 1005
C214	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C215	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C216	1-112-298-91 o	CAP, CERAMIC 1MF B (1608)
C217	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C218	1-100-566-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C219	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C220	1-100-566-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C221	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C223	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C224	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C227	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C228	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C229	1-100-415-91 s	CAP, CHIP CERAMIC 0.47MF(1005)
C234	1-112-800-11 s	CAP, ELCT 100MF
C235	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C236	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C237	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C241	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C242	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C243	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C244	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C245	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C246	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C247	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C248	1-164-882-81 s	CAP,CHIP CERAMIC 220PF CH 1005
C249	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C250	1-164-882-81 s	CAP,CHIP CERAMIC 220PF CH 1005
C251	1-164-882-81 s	CAP,CHIP CERAMIC 220PF CH 1005
C252	1-164-882-81 s	CAP,CHIP CERAMIC 220PF CH 1005
C253	1-164-882-81 s	CAP,CHIP CERAMIC 220PF CH 1005
C254	1-164-882-81 s	CAP,CHIP CERAMIC 220PF CH 1005
C255	1-164-882-81 s	CAP,CHIP CERAMIC 220PF CH 1005
C256	1-164-882-81 s	CAP,CHIP CERAMIC 220PF CH 1005
C257	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005

(SY-363 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C259	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C261	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C262	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C263	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C264	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C265	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C266	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C267	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C268	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C269	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C270	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C271	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C272	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C273	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C274	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C275	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C284	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C285	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C286	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C287	1-127-956-21 s	CAP, CHIP FILM 0.1MF (3225)
C288	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C289	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C290	1-100-505-91 s	CAP, CERAMIC 0.1MF C (1005)
C291	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C292	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C303	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C304	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C305	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C306	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C307	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C308	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C309	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C310	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C311	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C312	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C313	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C314	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C315	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C316	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C317	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C318	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C319	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C320	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C321	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C322	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C323	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C324	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C325	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C326	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C327	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C328	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C329	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C332	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C333	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C334	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C335	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C336	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C337	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C338	1-165-989-91 s	CAP, CERAMIC 10MF (2012)

(SY-363 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C339	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C340	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C341	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C342	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C343	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C344	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C345	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C346	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C347	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C348	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C349	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C350	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C351	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C352	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C353	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C354	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C355	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C356	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C357	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C358	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C359	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C360	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C361	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C362	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C363	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C401	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C402	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C403	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C404	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C405	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C406	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C407	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C408	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C450	1-164-882-81 s	CAP,CHIP CERAMIC 220PF CH 1005
C451	1-164-882-81 s	CAP,CHIP CERAMIC 220PF CH 1005
C521	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C522	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C523	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C524	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C525	1-100-055-21 s	CAP, CHIP CERAMIC 22MF B 3225
C526	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C527	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C528	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C529	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C530	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C531	1-164-858-81 s	CAP, CHIP CERAMIC 22PF CH 1005
C532	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C533	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C534	1-112-015-91 s	CAP, CHIP CERAMIC 47MF B 3225
C535	1-114-236-21 s	CAP, CERAMIC 22MF B (3225)
C536	1-114-236-21 s	CAP, CERAMIC 22MF B (3225)
C537	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C539	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C540	1-164-935-81 s	CAP, CHIP CERAMIC 470PF B 1005
C541	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C542	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C543	1-112-015-91 s	CAP, CHIP CERAMIC 47MF B 3225
C544	1-112-015-91 s	CAP, CHIP CERAMIC 47MF B 3225
C545	1-164-840-81 s	CAP, CHIP CERAMIC 1PF CK 1005

(SY-363 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C546	1-164-840-81 s	CAP, CHIP CERAMIC 1PF CK 1005
C547	1-164-840-81 s	CAP, CHIP CERAMIC 1PF CK 1005
C548	1-164-840-81 s	CAP, CHIP CERAMIC 1PF CK 1005
C549	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C550	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C551	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C552	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C553	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C554	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C555	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C556	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C557	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C558	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C559	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C560	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C561	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C562	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C563	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C564	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C565	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C566	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C568	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C569	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C571	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C572	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C573	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C575	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C576	1-164-845-81 s	CAP, CHIP CERAMIC 5PF CH 1005
C577	1-164-840-81 s	CAP, CHIP CERAMIC 1PF CK 1005
C578	1-164-850-81 s	CAP, CHIP CERAMIC 10PF CH 1005
C579	1-164-845-81 s	CAP, CHIP CERAMIC 5PF CH 1005
C580	1-164-862-81 s	CAP, CHIP CERAMIC 33PF CH 1005
C582	1-164-862-81 s	CAP, CHIP CERAMIC 33PF CH 1005
C583	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C584	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C585	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C586	1-112-015-91 s	CAP, CHIP CERAMIC 47MF B 3225
C587	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C588	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C589	1-164-840-81 s	CAP, CHIP CERAMIC 1PF CK 1005
C590	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C591	1-112-015-91 s	CAP, CHIP CERAMIC 47MF B 3225
C592	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C593	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C595	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C596	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C597	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C598	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C599	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C600	1-164-840-81 s	CAP, CHIP CERAMIC 1PF CK 1005
C601	1-112-015-91 s	CAP, CHIP CERAMIC 47MF B 3225
C602	1-112-015-91 s	CAP, CHIP CERAMIC 47MF B 3225
C603	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C604	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C605	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C611	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C612	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C613	1-112-015-91 s	CAP, CHIP CERAMIC 47MF B 3225
C614	1-112-015-91 s	CAP, CHIP CERAMIC 47MF B 3225

(SY-363 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C615	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C616	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C617	1-164-840-81 s	CAP, CHIP CERAMIC 1PF CK 1005
C618	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C619	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C620	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C621	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C623	1-164-862-81 s	CAP, CHIP CERAMIC 33PF CH 1005
C624	1-164-860-81 s	CAP, CHIP CERAMIC 27PF CH 1005
C625	1-164-862-81 s	CAP, CHIP CERAMIC 33PF CH 1005
C626	1-112-015-91 s	CAP, CHIP CERAMIC 47MF B 3225
C627	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C628	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C629	1-112-015-91 s	CAP, CHIP CERAMIC 47MF B 3225
C631	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C632	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C633	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C634	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C635	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C636	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C637	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C638	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C639	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C640	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C641	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C642	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C643	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C644	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C645	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C646	1-164-860-81 s	CAP, CHIP CERAMIC 27PF CH 1005
C647	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C648	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C649	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C650	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C651	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C652	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C653	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C661	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C662	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C663	1-100-415-91 s	CAP, CHIP CERAMIC 0.47MF(1005)
C664	1-100-415-91 s	CAP, CHIP CERAMIC 0.47MF(1005)
C665	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C666	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C667	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C668	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C669	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C670	1-165-884-91 s	CAP, CERAMIC 2.2MF (1608)
C671	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C672	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C673	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C674	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C675	1-164-935-81 s	CAP, CHIP CERAMIC 470PF B 1005
C676	1-164-935-81 s	CAP, CHIP CERAMIC 470PF B 1005
C677	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C678	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C679	1-100-055-21 s	CAP, CHIP CERAMIC 22MF B 3225
C680	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C681	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C682	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)

(SY-363 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C683	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C684	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C685	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C686	1-164-935-81 s	CAP, CHIP CERAMIC 470PF B 1005
C687	1-164-935-81 s	CAP, CHIP CERAMIC 470PF B 1005
C688	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C689	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C690	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C693	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C694	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C695	1-115-153-21 s	CAP, ELECT 4.7MF
C696	1-115-153-21 s	CAP, ELECT 4.7MF
C697	1-164-935-81 s	CAP, CHIP CERAMIC 470PF B 1005
C698	1-164-935-81 s	CAP, CHIP CERAMIC 470PF B 1005
C701	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C702	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C703	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C704	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C705	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C706	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C707	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C708	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C709	1-165-884-91 s	CAP, CERAMIC 2.2MF (1608)
C710	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C711	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C712	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C713	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C714	1-164-935-81 s	CAP, CHIP CERAMIC 470PF B 1005
C715	1-164-935-81 s	CAP, CHIP CERAMIC 470PF B 1005
C716	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C717	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C718	1-164-939-81 s	CAP, CHIP CERAMIC 2200PF B 1005
C719	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C720	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C721	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C722	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C723	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C724	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C725	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C726	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C727	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C728	1-164-935-81 s	CAP, CHIP CERAMIC 470PF B 1005
C729	1-164-935-81 s	CAP, CHIP CERAMIC 470PF B 1005
C730	1-112-298-91 o	CAP, CERAMIC 1MF B (1608)
C731	1-112-298-91 o	CAP, CERAMIC 1MF B (1608)
C732	1-100-505-91 s	CAP, CERAMIC 0.1MF C (1005)
C733	1-165-875-91 s	CAP, CHIP CERAMIC 10MF B 3216
C734	1-164-876-81 s	CAP,CHIP CERAMIC 120PF CH 1005
C735	1-164-876-81 s	CAP,CHIP CERAMIC 120PF CH 1005
C736	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C737	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C738	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C739	1-126-396-21 s	CAP, CHIP ELECT 47MF (6.3X5.7)
C740	1-126-396-21 s	CAP, CHIP ELECT 47MF (6.3X5.7)
C741	1-165-875-91 s	CAP, CHIP CERAMIC 10MF B 3216
C744	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C745	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C746	1-112-298-91 o	CAP, CERAMIC 1MF B (1608)
C747	1-126-396-21 s	CAP, CHIP ELECT 47MF (6.3X5.7)

(SY-363 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C748	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C749	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C750	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C751	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C752	1-164-939-81	s	CAP, CHIPCERAMIC 2200PF B 1005
C755	1-112-791-11	s	CAP, ELECT 100MF
C756	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C757	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C758	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C759	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C760	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C761	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C762	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C763	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C764	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C765	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C766	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C767	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C768	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C769	1-127-820-91	s	CAP, CHIP CERAMIC 4.7MF B 3216
C771	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C772	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C773	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C774	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C775	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C777	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C778	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C779	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C780	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C781	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C782	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C783	1-164-939-81	s	CAP, CHIPCERAMIC 2200PF B 1005
C784	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C785	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C786	1-100-505-91	s	CAP, CERAMIC 0.1MF C (1005)
C787	1-117-141-21	s	CAP, ELECT 0.1MF
C788	1-117-141-21	s	CAP, ELECT 0.1MF
C789	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C790	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C791	1-164-876-81	s	CAP,CHIP CERAMIC 120PF CH 1005
C792	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C793	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C794	1-164-882-81	s	CAP,CHIP CERAMIC 220PF CH 1005
C795	1-115-459-21	s	CAP, ELECT 47MF
C796	1-164-882-81	s	CAP,CHIP CERAMIC 220PF CH 1005
C797	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C798	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C799	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C800	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C801	1-164-876-81	s	CAP,CHIP CERAMIC 120PF CH 1005
C802	1-127-956-21	s	CAP, CHIP FILM 0.1MF (3225)
C803	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C804	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C805	1-112-015-91	s	CAP, CHIP CERAMIC 47MF B 3225
C806	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C807	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C808	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C809	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C810	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(SY-363 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C811	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C813	1-112-791-11	s	CAP, ELECT 100MF
C814	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C815	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C816	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C817	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C818	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C819	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C820	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C821	1-112-015-91	s	CAP, CHIP CERAMIC 47MF B 3225
C822	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C823	1-114-214-81	s	CAP,CHIP CERAMIC470PF CH1005
C824	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C825	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C827	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C829	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C830	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C831	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C832	1-112-015-91	s	CAP, CHIP CERAMIC 47MF B 3225
C833	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C834	1-126-405-21	s	CAP, CHIP ELECT 10MF (6.3X5.7)
C835	1-112-015-91	s	CAP, CHIP CERAMIC 47MF B 3225
C836	1-114-214-81	s	CAP,CHIP CERAMIC470PF CH1005
C837	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C838	1-112-800-11	s	CAP, ELECT 100MF
C839	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C840	1-164-939-81	s	CAP, CHIPCERAMIC 2200PF B 1005
C841	1-126-405-21	s	CAP, CHIP ELECT 10MF (6.3X5.7)
C842	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C843	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C844	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C845	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C846	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C847	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C848	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C849	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C851	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C852	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C855	1-117-145-21	s	CAP, ELECT 1MF
C856	1-117-145-21	s	CAP, ELECT 1MF
C857	1-117-145-21	s	CAP, ELECT 1MF
C858	1-117-145-21	s	CAP, ELECT 1MF
C859	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C860	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C861	1-117-145-21	s	CAP, ELECT 1MF
C862	1-117-145-21	s	CAP, ELECT 1MF
C865	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C866	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C867	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C868	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C869	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C870	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C871	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C872	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C873	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C874	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C875	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C876	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C877	1-165-989-91	s	CAP, CERAMIC 10MF (2012)

(SY-363 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C878	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C879	1-164-876-81	s CAP,CHIP CERAMIC 120PF CH 1005
C880	1-164-876-81	s CAP,CHIP CERAMIC 120PF CH 1005
C881	1-164-882-81	s CAP,CHIP CERAMIC 220PF CH 1005
C882	1-164-882-81	s CAP,CHIP CERAMIC 220PF CH 1005
C883	1-115-459-21	s CAP, ELECT 47MF
C884	1-115-459-21	s CAP, ELECT 47MF
C885	1-164-882-81	s CAP,CHIP CERAMIC 220PF CH 1005
C886	1-164-882-81	s CAP,CHIP CERAMIC 220PF CH 1005
C887	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C888	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C889	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C890	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C891	1-164-876-81	s CAP,CHIP CERAMIC 120PF CH 1005
C892	1-164-876-81	s CAP,CHIP CERAMIC 120PF CH 1005
C893	1-127-956-21	s CAP, CHIP FILM 0.1MF (3225)
C894	1-127-956-21	s CAP, CHIP FILM 0.1MF (3225)
C895	1-112-015-91	s CAP, CHIP CERAMIC 47MF B 3225
C896	1-112-015-91	s CAP, CHIP CERAMIC 47MF B 3225
C897	1-112-692-81	s CAP,CHIP CERAMIC1000PF CH 1005
CN2	1-770-626-21	s PIN, CONNECTOR 9P
CN3	1-816-755-21	s CONNECTOR (SM20B-SRSS-TB)
CN4	1-770-622-21	s PIN, CONNECTOR 5P
CN5	1-774-261-31	s CONNECTOR, FFC/FPC(ZIF) AN 24P
CN6	1-770-625-21	s PIN, CONNECTOR 8P
CN7	1-794-142-31	s CONNECTOR, FFC/FPC(ZIF) AN 36P
CN8	1-817-318-21	s PIN, CONNECTOR 6P
CN9	1-819-577-21	s PIN, CONNECTOR (PC BOARD) 15P
CN21	1-784-254-21	s CONNECTOR 10P
CN22	1-784-254-21	s CONNECTOR 10P
CN51	1-770-623-21	s PIN, CONNECTOR 6P
D1	8-719-083-83	s DI UDZSUSTE-1715B
D2	8-719-083-60	s DI UDZSUSTE-174.7B
D3	8-719-083-60	s DI UDZSUSTE-174.7B
D5	8-719-083-83	s DI UDZSUSTE-1715B
D6	6-501-123-01	s DIODE RB160M-60TR
D7	6-501-123-01	s DIODE RB160M-60TR
D8	8-719-083-60	s DI UDZSUSTE-174.7B
D9	8-719-083-60	s DI UDZSUSTE-174.7B
D10	6-502-197-01	s DI SML-D12M8WT86SM
D11	6-502-197-01	s DI SML-D12M8WT86SM
D12	8-719-083-60	s DI UDZSUSTE-174.7B
D13	8-719-024-71	s DIODE 1SS362-TE85L
D101	8-719-024-71	s DIODE 1SS362-TE85L
D102	8-719-024-71	s DIODE 1SS362-TE85L
D103	8-719-024-71	s DIODE 1SS362-TE85L
D104	Δ 8-719-024-71	s DIODE 1SS362-TE85L
D105	8-719-024-71	s DIODE 1SS362-TE85L
D106	8-719-024-71	s DIODE 1SS362-TE85L
D107	8-719-024-71	s DIODE 1SS362-TE85L
D108	8-719-024-71	s DIODE 1SS362-TE85L
D109	8-719-024-71	s DIODE 1SS362-TE85L
D110	8-719-024-71	s DIODE 1SS362-TE85L
D111	8-719-024-71	s DIODE 1SS362-TE85L
D112	8-719-024-71	s DIODE 1SS362-TE85L
D113	8-719-024-71	s DIODE 1SS362-TE85L
D114	8-719-083-60	s DI UDZSUSTE-174.7B
D115	8-719-083-60	s DI UDZSUSTE-174.7B

(SY-363 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
D116	8-719-989-04	s DIODE DAN222-TL
D117	8-719-989-04	s DIODE DAN222-TL
D118	8-719-989-04	s DIODE DAN222-TL
D119	8-719-024-71	s DIODE 1SS362-TE85L
D120	8-719-989-04	s DIODE DAN222-TL
D121	8-719-083-60	s DI UDZSUSTE-174.7B
D126	8-719-024-71	s DIODE 1SS362-TE85L
D127	8-719-024-71	s DIODE 1SS362-TE85L
D128	8-719-024-71	s DIODE 1SS362-TE85L
D129	8-719-024-71	s DIODE 1SS362-TE85L
D130	8-719-024-71	s DIODE 1SS362-TE85L
D131	8-719-024-71	s DIODE 1SS362-TE85L
D132	8-719-024-71	s DIODE 1SS362-TE85L
D133	8-719-024-71	s DIODE 1SS362-TE85L
D134	8-719-083-60	s DI UDZSUSTE-174.7B
D135	8-719-083-60	s DI UDZSUSTE-174.7B
D136	8-719-056-48	s DIODE 1SS388(TPL3)
D137	8-719-056-48	s DIODE 1SS388(TPL3)
D138	8-719-056-48	s DIODE 1SS388(TPL3)
D201	6-502-197-01	s DI SML-D12M8WT86SM
D501	8-719-056-48	s DIODE 1SS388(TPL3)
D502	8-719-056-48	s DIODE 1SS388(TPL3)
D511	8-719-989-04	s DIODE DAN222-TL
D521	8-719-056-48	s DIODE 1SS388(TPL3)
D522	8-719-024-71	s DIODE 1SS362-TE85L
D523	8-719-991-01	s DIODE DAP222-TL
D524	8-719-024-71	s DIODE 1SS362-TE85L
D525	8-719-056-48	s DIODE 1SS388(TPL3)
D531	8-719-083-66	s DI UDZSUSTE-1718B
D532	8-719-083-66	s DI UDZSUSTE-1718B
D533	8-719-083-66	s DI UDZSUSTE-1718B
D534	8-719-083-66	s DI UDZSUSTE-1718B
D535	6-502-598-01	s DI SML-D12U8WT86
D536	8-719-024-71	s DIODE 1SS362-TE85L
D541	8-719-989-04	s DIODE DAN222-TL
D542	8-719-989-04	s DIODE DAN222-TL
D543	8-719-024-71	s DIODE 1SS362-TE85L
D544	8-719-024-71	s DIODE 1SS362-TE85L
D545	8-719-024-71	s DIODE 1SS362-TE85L
D546	8-719-024-71	s DIODE 1SS362-TE85L
D547	8-719-024-71	s DIODE 1SS362-TE85L
D548	8-719-024-71	s DIODE 1SS362-TE85L
D549	8-719-024-71	s DIODE 1SS362-TE85L
D550	8-719-024-71	s DIODE 1SS362-TE85L
E1	1-535-877-22	s CHIP, CHECKER
E2	1-535-877-22	s CHIP, CHECKER
E3	1-535-877-22	s CHIP, CHECKER
E4	1-535-877-22	s CHIP, CHECKER
E5	1-535-877-22	s CHIP, CHECKER
FB1	1-469-094-21	s FERRITE, EMI (SMD) (1608)
FB2	1-414-864-21	s FERRITE, EMI (SMD) (1608)
FB3	1-414-864-21	s FERRITE, EMI (SMD) (1608)
FB4	1-414-864-21	s FERRITE, EMI (SMD) (1608)
FB5	1-469-094-21	s FERRITE, EMI (SMD) (1608)
FB6	1-469-094-21	s FERRITE, EMI (SMD) (1608)
FB7	1-469-094-21	s FERRITE, EMI (SMD) (1608)
FB8	1-414-864-21	s FERRITE, EMI (SMD) (1608)
FB9	1-414-864-21	s FERRITE, EMI (SMD) (1608)
FB10	1-469-094-21	s FERRITE, EMI (SMD) (1608)

(SY-363 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
FB208	1-400-832-21	s	SMD EMI FERRITE
FB209	1-400-832-21	s	SMD EMI FERRITE
FB210	1-400-832-21	s	SMD EMI FERRITE
FB211	1-400-832-21	s	SMD EMI FERRITE
FB212	1-400-832-21	s	SMD EMI FERRITE
FB213	1-400-832-21	s	SMD EMI FERRITE
FB214	1-400-832-21	s	SMD EMI FERRITE
FB215	1-400-832-21	s	SMD EMI FERRITE
FB216	1-400-832-21	s	SMD EMI FERRITE
FB501	1-400-832-21	s	SMD EMI FERRITE
FB502	1-400-832-21	s	SMD EMI FERRITE
FB503	1-414-445-21	s	FERRITE, EMI (SMD) (1608)
FB504	1-400-832-21	s	SMD EMI FERRITE
FB512	1-414-445-21	s	FERRITE, EMI (SMD) (1608)
FB513	1-400-832-21	s	SMD EMI FERRITE
FB516	1-414-445-21	s	FERRITE, EMI (SMD) (1608)
FB518	1-400-832-21	s	SMD EMI FERRITE
FB519	1-400-832-21	s	SMD EMI FERRITE
FB520	1-400-832-21	s	SMD EMI FERRITE
FB521	1-400-832-21	s	SMD EMI FERRITE
FB522	1-400-832-21	s	SMD EMI FERRITE
FB523	1-400-832-21	s	SMD EMI FERRITE
FB524	1-400-832-21	s	SMD EMI FERRITE
FB525	1-400-832-21	s	SMD EMI FERRITE
FB526	1-400-832-21	s	SMD EMI FERRITE
FB528	1-400-832-21	s	SMD EMI FERRITE
FB530	1-400-832-21	s	SMD EMI FERRITE
FB531	1-400-832-21	s	SMD EMI FERRITE
FB532	1-400-832-21	s	SMD EMI FERRITE
FB533	1-400-832-21	s	SMD EMI FERRITE
FB534	1-400-832-21	s	SMD EMI FERRITE
FB535	1-400-832-21	s	SMD EMI FERRITE
FB536	1-400-832-21	s	SMD EMI FERRITE
FB537	1-400-832-21	s	SMD EMI FERRITE
FB538	1-400-832-21	s	SMD EMI FERRITE
FB539	1-400-832-21	s	SMD EMI FERRITE
FB540	1-400-832-21	s	SMD EMI FERRITE
FB541	1-400-832-21	s	SMD EMI FERRITE
FB542	1-400-832-21	s	SMD EMI FERRITE
FB543	1-400-832-21	s	SMD EMI FERRITE
FB544	1-400-832-21	s	SMD EMI FERRITE
FB545	1-400-832-21	s	SMD EMI FERRITE
FB546	1-400-832-21	s	SMD EMI FERRITE
FB551	1-414-445-21	s	FERRITE, EMI (SMD) (1608)
FB552	1-414-445-21	s	FERRITE, EMI (SMD) (1608)
FB553	1-400-832-21	s	SMD EMI FERRITE
FB554	1-400-832-21	s	SMD EMI FERRITE
FB555	1-400-832-21	s	SMD EMI FERRITE
FB556	1-400-832-21	s	SMD EMI FERRITE
FB557	1-400-832-21	s	SMD EMI FERRITE
FB558	1-400-832-21	s	SMD EMI FERRITE
FB559	1-400-832-21	s	SMD EMI FERRITE
FB560	1-400-832-21	s	SMD EMI FERRITE
FB561	1-400-832-21	s	SMD EMI FERRITE
FB567	1-400-832-21	s	SMD EMI FERRITE
FB568	1-400-832-21	s	SMD EMI FERRITE
FB569	1-400-832-21	s	SMD EMI FERRITE
FB571	1-400-832-21	s	SMD EMI FERRITE
FB572	1-400-832-21	s	SMD EMI FERRITE

(SY-363 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
FB573	1-400-832-21	s SMD EMI FERRITE
FB574	1-400-832-21	s SMD EMI FERRITE
FB575	1-400-832-21	s SMD EMI FERRITE
FB576	1-400-832-21	s SMD EMI FERRITE
FB577	1-400-832-21	s SMD EMI FERRITE
FB581	1-414-445-21	s FERRITE, EMI (SMD) (1608)
FB591	1-400-832-21	s SMD EMI FERRITE
FB592	1-400-832-21	s SMD EMI FERRITE
FB593	1-400-832-21	s SMD EMI FERRITE
FB594	1-400-832-21	s SMD EMI FERRITE
FB595	1-400-832-21	s SMD EMI FERRITE
FB597	1-400-832-21	s SMD EMI FERRITE
FB598	1-400-832-21	s SMD EMI FERRITE
FB601	1-400-832-21	s SMD EMI FERRITE
FB602	1-400-832-21	s SMD EMI FERRITE
FB603	1-400-832-21	s SMD EMI FERRITE
FB604	1-400-832-21	s SMD EMI FERRITE
FB605	1-400-832-21	s SMD EMI FERRITE
FB606	1-400-832-21	s SMD EMI FERRITE
FB607	1-400-832-21	s SMD EMI FERRITE
FL501	1-813-544-11	s FILTER, LOW PASS
FL502	1-813-543-11	s FILTER, LOW PASS
FL503	1-813-543-11	s FILTER, LOW PASS
FL504	1-233-891-21	s FILTER, LOW PASS
FL505	1-239-897-22	s FILTER, EMI (SMD)
FL506	1-239-897-22	s FILTER, EMI (SMD)
FL511	1-200-092-11	s FILTER, LOW PASS
IC1	6-704-976-01	s IC ADR381ARTZ-REEL7
IC3	8-759-327-01	s IC NJM062V (TE2)
IC4	6-709-213-01	s IC NJM2387ADL3 (TE2)
IC5	8-759-327-01	s IC NJM062V (TE2)
IC6	8-759-327-01	s IC NJM062V (TE2)
IC7	6-706-220-01	s IC LTC3411EMS#TR
IC101	8-759-656-54	s IC TC7WH14FK (TE85R)
IC102	8-759-656-54	s IC TC7WH14FK (TE85R)
IC103	6-706-489-01	s IC TC7SH32FU (T5RSOYJF)
IC104	8-759-656-54	s IC TC7WH14FK (TE85R)
IC105	8-759-680-48	s IC TC7WH157FK (TE85R)
IC106	6-706-484-01	s IC TC7SH04FU (T5RSOYJF)
IC107	6-706-484-01	s IC TC7SH04FU (T5RSOYJF)
IC108	8-759-648-04	s IC RTC-4574JE
IC109	6-707-845-01	s IC TC74LCX138FT (EKJ)
IC110	6-703-421-01	s IC HD64F7145F50
IC111	6-707-845-01	s IC TC74LCX138FT (EKJ)
IC112	8-759-698-31	s IC TC7WH74FK (TE85R)
IC113	8-759-680-48	s IC TC7WH157FK (TE85R)
IC114	6-707-850-01	s IC TC74LCX245FT (EKJ)
IC115	8-759-680-48	s IC TC7WH157FK (TE85R)
IC116	8-759-598-44	s IC TC7WH08FK (TE85R)
IC117	6-702-879-01	s IC R3112N281A-TR-FA
IC118	6-713-641-01	s IC S29JL032H70TFI210
IC119	6-713-641-01	s IC S29JL032H70TFI210
IC120	6-704-099-01	s IC TC7WZ08FK (TE85R)
IC122	6-713-689-01	s IC R1LV0416DSB-5SI
IC123	6-713-689-01	s IC R1LV0416DSB-5SI
IC124	6-707-845-01	s IC TC74LCX138FT (EKJ)
IC125	6-707-850-01	s IC TC74LCX245FT (EKJ)
IC126	6-704-099-01	s IC TC7WZ08FK (TE85R)

(SY-363 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
IC127	6-713-119-01	s IC MB85R1002PFTN
IC128	8-759-584-32	s IC MB86189PFV-G-BND-ER-E1
IC129	6-706-484-01	s IC TC7SH04FU (T5RSOYJF)
IC130	8-759-598-43	s IC TC7WH04FK (TE85R)
IC131	6-706-489-01	s IC TC7SH32FU (T5RSOYJF)
IC132	8-759-656-54	s IC TC7WH14FK (TE85R)
IC133	8-759-656-54	s IC TC7WH14FK (TE85R)
IC134	8-759-675-53	s IC TC7WH32FK (TE85R)
IC135	6-706-484-01	s IC TC7SH04FU (T5RSOYJF)
IC136	6-706-487-01	s IC TC7SH08FU (T5RSOYJF)
IC137	8-759-598-44	s IC TC7WH08FK (TE85R)
IC138	8-759-675-53	s IC TC7WH32FK (TE85R)
IC139	8-759-598-44	s IC TC7WH08FK (TE85R)
IC140	8-759-598-44	s IC TC7WH08FK (TE85R)
IC141	6-706-487-01	s IC TC7SH08FU (T5RSOYJF)
IC142	8-759-598-43	s IC TC7WH04FK (TE85R)
IC143	8-759-669-43	s IC SN74LVC157APWR-12
IC145	8-759-594-17	o IC CXD9093R
IC146	8-759-598-43	s IC TC7WH04FK (TE85R)
IC147	8-759-598-44	s IC TC7WH08FK (TE85R)
IC148	8-759-092-83	s IC SN75158PSR
IC156	6-706-487-01	s IC TC7SH08FU (T5RSOYJF)
IC157	8-759-083-42	s IC TC4W53FU (TE12R)
IC158	8-759-083-42	s IC TC4W53FU (TE12R)
IC159	8-759-083-42	s IC TC4W53FU (TE12R)
IC160	8-759-083-42	s IC TC4W53FU (TE12R)
IC161	6-706-489-01	s IC TC7SH32FU (T5RSOYJF)
IC162	8-759-656-54	s IC TC7WH14FK (TE85R)
IC164	6-706-484-01	s IC TC7SH04FU (T5RSOYJF)
IC165	6-707-890-01	s IC TC74VHCT244AFT (EKJ)
IC168	8-759-656-54	s IC TC7WH14FK (TE85R)
IC169	8-759-598-44	s IC TC7WH08FK (TE85R)
IC170	6-707-843-01	s IC TC74LCX125FT (EKJ)
IC171	8-759-598-44	s IC TC7WH08FK (TE85R)
IC172	6-707-886-01	s IC TC74VHCT125AFT (EKJ)
IC173	6-707-861-01	s IC TC74VHC04FT (EKJ)
IC174	6-706-487-01	s IC TC7SH08FU (T5RSOYJF)
IC175	6-702-879-01	s IC R3112N281A-TR-FA
IC181	6-712-383-01	s IC TC74VHC4051AFT (EK)
IC182	6-712-383-01	s IC TC74VHC4051AFT (EK)
IC183	6-711-237-01	s IC NJM2878F3-33 (TE2)
IC184	6-712-382-01	s IC TC74VHC4053AFT (EK)
IC185	6-708-346-01	s IC DAC7512N
IC186	8-759-669-66	s IC TLC272CPWR-12
IC187	8-759-327-01	s IC NJM062V (TE2)
IC188	8-759-327-01	s IC NJM062V (TE2)
IC189	8-759-327-01	s IC NJM062V (TE2)
IC190	8-759-327-01	s IC NJM062V (TE2)
IC191	8-759-327-01	s IC NJM062V (TE2)
IC203	6-709-765-01	s IC EPCS4SI8N (15)
IC205	6-707-850-01	s IC TC74LCX245FT (EKJ)
IC206	6-709-765-01	s IC EPCS4SI8N (15)
IC207	8-759-598-44	s IC TC7WH08FK (TE85R)
IC208	6-706-487-01	s IC TC7SH08FU (T5RSOYJF)
IC501	8-759-485-24	s IC MC74HC4046ADTR2
IC502	6-707-890-01	s IC TC74VHCT244AFT (EKJ)
IC503	6-707-850-01	s IC TC74LCX245FT (EKJ)
IC504	6-706-484-01	s IC TC7SH04FU (T5RSOYJF)
IC506	8-759-327-01	s IC NJM062V (TE2)

(SY-363 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC507	8-759-598-43	s IC	TC7WH04FK (TE85R)
IC508	6-706-487-01	s IC	TC7SH08FU (T5RSOYJF)
IC509	6-707-890-01	s IC	TC74VHCT244AFT (EKJ)
IC511	6-707-890-01	s IC	TC74VHCT244AFT (EKJ)
IC513	8-759-561-46	s IC	AD8014ARTZ-REEL7
IC514	8-759-561-46	s IC	AD8014ARTZ-REEL7
IC515	8-759-561-46	s IC	AD8014ARTZ-REEL7
IC516	8-759-561-46	s IC	AD8014ARTZ-REEL7
IC517	6-707-881-01	s IC	TC74VHC574FT (EKJ)
IC518	8-759-561-46	s IC	AD8014ARTZ-REEL7
IC519	8-759-561-46	s IC	AD8014ARTZ-REEL7
IC520	8-759-561-46	s IC	AD8014ARTZ-REEL7
IC521	8-759-561-46	s IC	AD8014ARTZ-REEL7
IC522	8-759-675-54	s IC	TC7W53FK (TE85R)
IC523	8-759-675-54	s IC	TC7W53FK (TE85R)
IC531	8-759-561-46	s IC	AD8014ARTZ-REEL7
IC532	8-759-561-46	s IC	AD8014ARTZ-REEL7
IC533	8-759-561-46	s IC	AD8014ARTZ-REEL7
IC534	8-759-287-55	s IC	TC7S66FU (TE85R)
IC535	8-759-287-55	s IC	TC7S66FU (TE85R)
IC536	6-700-186-01	s IC	GS4981ITA
IC537	8-759-327-14	s IC	TL712CPSR
IC538	8-759-327-14	s IC	TL712CPSR
IC539	6-706-484-01	s IC	TC7SH04FU (T5RSOYJF)
IC540	6-707-843-01	s IC	TC74LCX125FT (EKJ)
IC541	8-759-663-35	s IC	74VHC4053MTCX
IC542	8-759-669-66	s IC	TLC272CPWR-12
IC543	8-759-669-66	s IC	TLC272CPWR-12
IC551	6-711-237-01	s IC	NJM2878F3-33 (TE2)
IC552	6-707-666-01	s IC	NJU26902VM1-TE2
IC553	6-700-563-01	s IC	AK4552VT-E2
IC555	6-706-906-01	s IC	NJM2732RB1 (TE2)
IC556	6-706-906-01	s IC	NJM2732RB1 (TE2)
IC557	6-706-906-01	s IC	NJM2732RB1 (TE2)
IC561	6-707-861-01	s IC	TC74VHC04FT (EKJ)
IC562	6-701-111-01	s IC	AK4382AVT-E2
IC563	6-700-563-01	s IC	AK4552VT-E2
IC564	6-706-906-01	s IC	NJM2732RB1 (TE2)
IC565	6-706-906-01	s IC	NJM2732RB1 (TE2)
IC566	6-706-906-01	s IC	NJM2732RB1 (TE2)
IC567	8-759-422-21	s IC	NJM4580V (TE2)
IC568	8-759-422-21	s IC	NJM4580V (TE2)
IC581	8-759-669-66	s IC	TLC272CPWR-12
IC582	8-759-680-48	s IC	TC7WH157FK (TE85R)
IC583	6-706-489-01	s IC	TC7SH32FU (T5RSOYJF)
IC584	6-707-850-01	s IC	TC74LCX245FT (EKJ)
IC585	8-759-675-54	s IC	TC7W53FK (TE85R)
IC586	6-706-489-01	s IC	TC7SH32FU (T5RSOYJF)
IC587	8-759-675-54	s IC	TC7W53FK (TE85R)
IC588	6-709-322-01	s IC	TC7WH123FK (TE85R)
IC589	6-704-567-01	s IC	R3112N451A-TR-FA
IC590	6-706-484-01	s IC	TC7SH04FU (T5RSOYJF)
IC591	6-709-322-01	s IC	TC7WH123FK (TE85R)
IC592	8-759-680-48	s IC	TC7WH157FK (TE85R)
IC593	8-759-672-76	s IC	AK9813BF-E2
IC594	6-706-484-01	s IC	TC7SH04FU (T5RSOYJF)
IC595	6-706-487-01	s IC	TC7SH08FU (T5RSOYJF)
IC596	6-706-489-01	s IC	TC7SH32FU (T5RSOYJF)
IC601	6-712-382-01	s IC	TC74VHC4053AFT (EK)

(SY-363 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC602	6-706-906-01	s IC	NJM2732RB1 (TE2)
IC603	6-704-960-01	s IC	NJM2172V (TE2)
IC604	6-706-489-01	s IC	TC7SH32FU (T5RSOYJF)
IC605	6-706-906-01	s IC	NJM2732RB1 (TE2)
IC606	8-759-675-54	s IC	TC7W53FK (TE85R)
IC607	8-759-675-54	s IC	TC7W53FK (TE85R)
IC608	8-759-675-54	s IC	TC7W53FK (TE85R)
IC609	8-759-327-01	s IC	NJM062V (TE2)
IC610	8-759-356-17	s IC	NJM4556AM-A-TE2
IC611	6-706-484-01	s IC	TC7SH04FU (T5RSOYJF)
IC612	6-706-487-01	s IC	TC7SH08FU (T5RSOYJF)
IC621	6-712-382-01	s IC	TC74VHC4053AFT (EK)
IC622	6-712-382-01	s IC	TC74VHC4053AFT (EK)
IC623	6-712-382-01	s IC	TC74VHC4053AFT (EK)
IC624	6-712-382-01	s IC	TC74VHC4053AFT (EK)
IC625	6-706-906-01	s IC	NJM2732RB1 (TE2)
IC626	6-706-906-01	s IC	NJM2732RB1 (TE2)
JC1	1-218-990-81	s	CONDUCTOR, CHIP (1005)
JC511	1-218-990-81	s	CONDUCTOR, CHIP (1005)
L1	1-419-630-21	s	COIL, CHOKE 4.7UH
L201	1-416-344-21	s	COIL, CHOKE 10UH
L501	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L502	1-412-947-21	s	INDUCTOR 4.7UH (2520)
L503	1-412-955-21	s	INDUCTOR, SMALL TYPE 22UH 2520
L504	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L505	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L511	1-412-947-21	s	INDUCTOR 4.7UH (2520)
PH101	8-749-014-35	s	IC HCPL-0630-500
Q1	6-550-632-01	s	TRANSISTOR 2SC4672-T100-Q
Q2	6-550-631-01	s	TRANSISTOR 2SA1797-T100-Q
Q3	6-550-632-01	s	TRANSISTOR 2SC4672-T100-Q
Q4	6-550-631-01	s	TRANSISTOR 2SA1797-T100-Q
Q5	6-550-632-01	s	TRANSISTOR 2SC4672-T100-Q
Q6	6-550-632-01	s	TRANSISTOR 2SC4672-T100-Q
Q7	6-550-631-01	s	TRANSISTOR 2SA1797-T100-Q
Q8	8-729-928-91	s	TRANSISTOR DTC114EE-TL
Q9	8-729-928-91	s	TRANSISTOR DTC114EE-TL
Q10	8-729-928-91	s	TRANSISTOR DTC114EE-TL
Q11	8-729-928-37	s	TRANSISTOR DTA114EE-TL
Q101	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q102	8-729-928-91	s	TRANSISTOR DTC114EE-TL
Q103	8-729-928-91	s	TRANSISTOR DTC114EE-TL
Q104	8-729-928-91	s	TRANSISTOR DTC114EE-TL
Q105	8-729-928-91	s	TRANSISTOR DTC114EE-TL
Q106	8-729-928-91	s	TRANSISTOR DTC114EE-TL
Q107	8-729-928-91	s	TRANSISTOR DTC114EE-TL
Q108	8-729-928-91	s	TRANSISTOR DTC114EE-TL
Q109	8-729-928-91	s	TRANSISTOR DTC114EE-TL
Q110	8-729-928-91	s	TRANSISTOR DTC114EE-TL
Q111	6-551-041-01	s	TRANSISTOR RN4904 (T5RSOY, D, F)
Q112	6-551-041-01	s	TRANSISTOR RN4904 (T5RSOY, D, F)
Q113	6-551-041-01	s	TRANSISTOR RN4904 (T5RSOY, D, F)
Q114	6-551-041-01	s	TRANSISTOR RN4904 (T5RSOY, D, F)
Q115	6-551-041-01	s	TRANSISTOR RN4904 (T5RSOY, D, F)
Q116	6-551-041-01	s	TRANSISTOR RN4904 (T5RSOY, D, F)
Q117	6-551-041-01	s	TRANSISTOR RN4904 (T5RSOY, D, F)
Q118	6-551-041-01	s	TRANSISTOR RN4904 (T5RSOY, D, F)

(SY-363 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
Q119	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q120	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q121	8-729-928-91	s	TRANSISTOR DTC114EE-TL
Q122	8-729-928-37	s	TRANSISTOR DTA114EE-TL
Q123	8-729-928-37	s	TRANSISTOR DTA114EE-TL
Q150	8-729-928-91	s	TRANSISTOR DTC114EE-TL
Q501	8-729-144-81	s	TRANSISTOR 2SC4176T1B33B34B35
Q502	8-729-144-81	s	TRANSISTOR 2SC4176T1B33B34B35
Q503	8-729-928-37	s	TRANSISTOR DTA114EE-TL
Q504	8-729-140-86	s	TRANSISTOR 2SA1610-T1Y34
Q506	8-729-144-81	s	TRANSISTOR 2SC4176T1B33B34B35
Q507	8-729-144-81	s	TRANSISTOR 2SC4176T1B33B34B35
Q508	8-729-928-37	s	TRANSISTOR DTA114EE-TL
Q509	8-729-140-86	s	TRANSISTOR 2SA1610-T1Y34
Q510	8-729-144-81	s	TRANSISTOR 2SC4176T1B33B34B35
Q511	8-729-144-81	s	TRANSISTOR 2SC4176T1B33B34B35
Q512	8-729-928-37	s	TRANSISTOR DTA114EE-TL
Q513	8-729-140-86	s	TRANSISTOR 2SA1610-T1Y34
Q514	8-729-144-81	s	TRANSISTOR 2SC4176T1B33B34B35
Q515	8-729-140-86	s	TRANSISTOR 2SA1610-T1Y34
Q521	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q525	8-729-144-81	s	TRANSISTOR 2SC4176T1B33B34B35
Q526	8-729-928-37	s	TRANSISTOR DTA114EE-TL
Q541	8-729-231-96	s	TRANSISTOR 2SK880GR-TE85L
Q542	8-729-231-96	s	TRANSISTOR 2SK880GR-TE85L
Q543	6-550-980-01	s	TRANSISTOR RN1904 (T5RSONY,D,F)
Q544	6-551-041-01	s	TRANSISTOR RN4904 (T5RSONY,D,F)
Q551	8-729-013-37	s	TRANSISTOR 2SC4213-AB-TE85L
Q552	8-729-013-37	s	TRANSISTOR 2SC4213-AB-TE85L
Q553	8-729-013-37	s	TRANSISTOR 2SC4213-AB-TE85L
Q554	8-729-013-37	s	TRANSISTOR 2SC4213-AB-TE85L
Q555	6-551-041-01	s	TRANSISTOR RN4904 (T5RSONY,D,F)
Q556	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q557	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q561	8-729-928-91	s	TRANSISTOR DTC114EE-TL
Q562	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q563	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q564	8-729-013-37	s	TRANSISTOR 2SC4213-AB-TE85L
Q565	8-729-928-91	s	TRANSISTOR DTC114EE-TL
Q567	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q569	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q570	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q571	6-551-041-01	s	TRANSISTOR RN4904 (T5RSONY,D,F)
Q572	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q573	6-551-041-01	s	TRANSISTOR RN4904 (T5RSONY,D,F)
Q574	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q575	6-551-041-01	s	TRANSISTOR RN4904 (T5RSONY,D,F)
Q578	8-729-231-96	s	TRANSISTOR 2SK880GR-TE85L
Q579	8-729-231-96	s	TRANSISTOR 2SK880GR-TE85L
Q580	6-550-632-01	s	TRANSISTOR 2SC4672-T100-Q
Q581	8-729-013-37	s	TRANSISTOR 2SC4213-AB-TE85L
Q582	8-729-013-37	s	TRANSISTOR 2SC4213-AB-TE85L
Q583	8-729-144-81	s	TRANSISTOR 2SC4176T1B33B34B35
Q589	8-729-144-81	s	TRANSISTOR 2SC4176T1B33B34B35
Q590	6-550-632-01	s	TRANSISTOR 2SC4672-T100-Q
Q591	6-550-980-01	s	TRANSISTOR RN1904 (T5RSONY,D,F)
Q592	6-550-980-01	s	TRANSISTOR RN1904 (T5RSONY,D,F)
Q593	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q594	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR

(SY-363 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
Q595	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q597	6-551-041-01	s	TRANSISTOR RN4904 (T5RSONY,D,F)
Q598	6-551-041-01	s	TRANSISTOR RN4904 (T5RSONY,D,F)
Q599	8-729-231-96	s	TRANSISTOR 2SK880GR-TE85L
Q600	8-729-231-96	s	TRANSISTOR 2SK880GR-TE85L
Q601	8-729-231-96	s	TRANSISTOR 2SK880GR-TE85L
Q602	8-729-231-96	s	TRANSISTOR 2SK880GR-TE85L
Q605	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q606	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q608	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q610	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q611	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q612	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q621	8-729-928-91	s	TRANSISTOR DTC114EE-TL
Q631	8-729-013-37	s	TRANSISTOR 2SC4213-AB-TE85L
Q632	8-729-013-37	s	TRANSISTOR 2SC4213-AB-TE85L
Q633	8-729-013-37	s	TRANSISTOR 2SC4213-AB-TE85L
Q634	8-729-013-37	s	TRANSISTOR 2SC4213-AB-TE85L
R1	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2	1-208-871-81	s	RES, CHIP 220 (1005)
R3	1-208-871-81	s	RES, CHIP 220 (1005)
R4	1-208-911-81	s	RES, CHIP 10K (1005)
R5	1-208-911-81	s	RES, CHIP 10K (1005)
R6	1-208-919-81	s	RES, CHIP 22K (1005)
R7	1-208-911-81	s	RES, CHIP 10K (1005)
R8	1-208-911-81	s	RES, CHIP 10K (1005)
R9	1-208-887-81	s	RES, CHIP 1.0K (1005)
R10	1-208-935-81	s	RES, CHIP 100K (1005)
R11	1-208-911-81	s	RES, CHIP 10K (1005)
R12	1-208-911-81	s	RES, CHIP 10K (1005)
R13	1-208-871-81	s	RES, CHIP 220 (1005)
R14	1-208-891-81	s	RES, CHIP 1.5K (1005)
R15	1-208-903-81	s	RES, CHIP 4.7K (1005)
R16	1-208-883-81	s	RES, CHIP 680 (1005)
R17	1-208-919-81	s	RES, CHIP 22K (1005)
R18	1-208-887-81	s	RES, CHIP 1.0K (1005)
R19	1-220-870-81	s	RES, CHIP 10 (1005)
R20	1-208-871-81	s	RES, CHIP 220 (1005)
R21	1-208-871-81	s	RES, CHIP 220 (1005)
R22	1-208-919-81	s	RES, CHIP 22K (1005)
R23	1-208-927-81	s	RES, CHIP 47K (1005)
R24	1-208-927-81	s	RES, CHIP 47K (1005)
R25	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R26	1-208-911-81	s	RES, CHIP 10K (1005)
R27	1-208-911-81	s	RES, CHIP 10K (1005)
R28	1-208-927-81	s	RES, CHIP 47K (1005)
R29	1-208-923-81	s	RES, CHIP 33K (1005)
R30	1-208-907-81	s	RES, CHIP 6.8K (1005)
R31	1-208-935-81	s	RES, CHIP 100K (1005)
R32	1-220-870-81	s	RES, CHIP 10 (1005)
R33	1-208-943-81	s	RES, CHIP 220K (1005)
R34	1-208-943-81	s	RES, CHIP 220K (1005)
R35	1-208-935-81	s	RES, CHIP 100K (1005)
R36	1-208-935-81	s	RES, CHIP 100K (1005)
R37	1-208-927-81	s	RES, CHIP 47K (1005)
R38	1-208-919-81	s	RES, CHIP 22K (1005)
R39	1-208-899-81	s	RES, CHIP 3.3K (1005)
R40	1-208-907-81	s	RES, CHIP 6.8K (1005)

(SY-363 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R41	1-208-887-81	s RES, CHIP 1.0K (1005)
R43	1-208-911-81	s RES, CHIP 10K (1005)
R44	1-208-863-81	s RES, CHIP 100 (1005)
R45	1-208-887-81	s RES, CHIP 1.0K (1005)
R51	1-208-903-81	s RES, CHIP 4.7K (1005)
R60	1-208-863-81	s RES, CHIP 100 (1005)
R61	1-208-863-81	s RES, CHIP 100 (1005)
R62	1-208-911-81	s RES, CHIP 10K (1005)
R63	1-208-911-81	s RES, CHIP 10K (1005)
R64	1-208-927-81	s RES, CHIP 47K (1005)
R65	1-208-927-81	s RES, CHIP 47K (1005)
R66	1-208-887-81	s RES, CHIP 1.0K (1005)
R67	1-208-887-81	s RES, CHIP 1.0K (1005)
R68	1-208-871-81	s RES, CHIP 220 (1005)
R69	1-208-927-81	s RES, CHIP 47K (1005)
R91	1-208-903-81	s RES, CHIP 4.7K (1005)
R92	1-208-903-81	s RES, CHIP 4.7K (1005)
R93	1-220-878-81	s RES, CHIP 22 (1005)
R94	1-208-935-81	s RES, CHIP 100K (1005)
R95	1-208-935-81	s RES, CHIP 100K (1005)
R96	1-208-863-81	s RES, CHIP 100 (1005)
R97	1-208-863-81	s RES, CHIP 100 (1005)
R101	1-208-863-81	s RES, CHIP 100 (1005)
R102	1-208-863-81	s RES, CHIP 100 (1005)
R103	1-208-863-81	s RES, CHIP 100 (1005)
R104	1-208-863-81	s RES, CHIP 100 (1005)
R105	1-208-863-81	s RES, CHIP 100 (1005)
R106	1-208-863-81	s RES, CHIP 100 (1005)
R107	1-208-871-81	s RES, CHIP 220 (1005)
R108	1-208-935-81	s RES, CHIP 100K (1005)
R109	1-208-935-81	s RES, CHIP 100K (1005)
R110	1-208-935-81	s RES, CHIP 100K (1005)
R111	1-208-911-81	s RES, CHIP 10K (1005)
R112	1-208-863-81	s RES, CHIP 100 (1005)
R113	1-208-863-81	s RES, CHIP 100 (1005)
R114	1-208-935-81	s RES, CHIP 100K (1005)
R115	1-208-935-81	s RES, CHIP 100K (1005)
R116	1-208-911-81	s RES, CHIP 10K (1005)
R117	1-208-863-81	s RES, CHIP 100 (1005)
R118	1-208-887-81	s RES, CHIP 1.0K (1005)
R119	1-208-935-81	s RES, CHIP 100K (1005)
R120	1-208-863-81	s RES, CHIP 100 (1005)
R121	1-208-887-81	s RES, CHIP 1.0K (1005)
R122	1-208-935-81	s RES, CHIP 100K (1005)
R123	1-208-911-81	s RES, CHIP 10K (1005)
R124	1-208-935-81	s RES, CHIP 100K (1005)
R125	1-208-887-81	s RES, CHIP 1.0K (1005)
R126	1-208-871-81	s RES, CHIP 220 (1005)
R127	1-208-871-81	s RES, CHIP 220 (1005)
R128	1-208-871-81	s RES, CHIP 220 (1005)
R129	1-208-935-81	s RES, CHIP 100K (1005)
R130	1-208-879-81	s RES, CHIP 470 (1005)
R131	1-208-887-81	s RES, CHIP 1.0K (1005)
R132	Δ 1-208-887-81	s RES, CHIP 1.0K (1005)
R133	1-208-863-81	s RES, CHIP 100 (1005)
R134	1-208-903-81	s RES, CHIP 4.7K (1005)
R135	1-208-863-81	s RES, CHIP 100 (1005)
R136	1-208-863-81	s RES, CHIP 100 (1005)
R137	1-208-911-81	s RES, CHIP 10K (1005)

(SY-363 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R139	1-208-863-81	s RES, CHIP 100 (1005)
R140	1-208-863-81	s RES, CHIP 100 (1005)
R141	1-208-863-81	s RES, CHIP 100 (1005)
R142	1-208-935-81	s RES, CHIP 100K (1005)
R143	1-208-911-81	s RES, CHIP 10K (1005)
R144	1-208-911-81	s RES, CHIP 10K (1005)
R145	1-208-911-81	s RES, CHIP 10K (1005)
R146	1-208-863-81	s RES, CHIP 100 (1005)
R147	1-208-911-81	s RES, CHIP 10K (1005)
R149	1-208-911-81	s RES, CHIP 10K (1005)
R150	1-208-863-81	s RES, CHIP 100 (1005)
R151	1-208-903-81	s RES, CHIP 4.7K (1005)
R152	1-208-899-81	s RES, CHIP 3.3K (1005)
R153	1-208-871-81	s RES, CHIP 220 (1005)
R154	1-208-935-81	s RES, CHIP 100K (1005)
R155	1-208-855-81	s RES, CHIP 47 (1005)
R156	1-208-903-81	s RES, CHIP 4.7K (1005)
R157	1-208-911-81	s RES, CHIP 10K (1005)
R160	1-208-911-81	s RES, CHIP 10K (1005)
R161	1-208-911-81	s RES, CHIP 10K (1005)
R165	1-208-911-81	s RES, CHIP 10K (1005)
R166	1-208-863-81	s RES, CHIP 100 (1005)
R167	1-208-863-81	s RES, CHIP 100 (1005)
R168	1-208-911-81	s RES, CHIP 10K (1005)
R169	1-208-871-81	s RES, CHIP 220 (1005)
R170	1-208-911-81	s RES, CHIP 10K (1005)
R171	1-208-919-81	s RES, CHIP 22K (1005)
R172	1-208-935-81	s RES, CHIP 100K (1005)
R173	1-208-935-81	s RES, CHIP 100K (1005)
R174	1-208-911-81	s RES, CHIP 10K (1005)
R175	1-208-855-81	s RES, CHIP 47 (1005)
R176	1-208-911-81	s RES, CHIP 10K (1005)
R177	1-208-855-81	s RES, CHIP 47 (1005)
R178	1-208-911-81	s RES, CHIP 10K (1005)
R179	1-208-911-81	s RES, CHIP 10K (1005)
R180	1-208-911-81	s RES, CHIP 10K (1005)
R181	1-208-911-81	s RES, CHIP 10K (1005)
R182	1-208-911-81	s RES, CHIP 10K (1005)
R183	1-208-935-81	s RES, CHIP 100K (1005)
R184	1-208-935-81	s RES, CHIP 100K (1005)
R185	1-220-870-81	s RES, CHIP 10 (1005)
R186	1-208-935-81	s RES, CHIP 100K (1005)
R187	1-208-935-81	s RES, CHIP 100K (1005)
R188	1-208-935-81	s RES, CHIP 100K (1005)
R189	1-208-887-81	s RES, CHIP 1.0K (1005)
R190	1-208-935-81	s RES, CHIP 100K (1005)
R191	1-208-935-81	s RES, CHIP 100K (1005)
R192	1-208-887-81	s RES, CHIP 1.0K (1005)
R193	1-208-887-81	s RES, CHIP 1.0K (1005)
R194	1-208-935-81	s RES, CHIP 100K (1005)
R195	1-220-878-81	s RES, CHIP 22 (1005)
R196	1-208-935-81	s RES, CHIP 100K (1005)
R197	1-220-878-81	s RES, CHIP 22 (1005)
R198	1-220-878-81	s RES, CHIP 22 (1005)
R199	1-220-878-81	s RES, CHIP 22 (1005)
R200	1-220-878-81	s RES, CHIP 22 (1005)
R201	1-208-935-81	s RES, CHIP 100K (1005)
R202	1-208-863-81	s RES, CHIP 100 (1005)
R203	1-208-911-81	s RES, CHIP 10K (1005)

(SY-363 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R204	1-208-887-81 s	RES, CHIP 1.0K (1005)
R205	1-208-855-81 s	RES, CHIP 47 (1005)
R207	1-208-863-81 s	RES, CHIP 100 (1005)
R208	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R209	1-208-855-81 s	RES, CHIP 47 (1005)
R211	1-208-863-81 s	RES, CHIP 100 (1005)
R212	1-208-911-81 s	RES, CHIP 10K (1005)
R213	1-208-879-81 s	RES, CHIP 470 (1005)
R214	1-220-878-81 s	RES, CHIP 22 (1005)
R215	1-208-911-81 s	RES, CHIP 10K (1005)
R216	1-208-911-81 s	RES, CHIP 10K (1005)
R217	1-208-911-81 s	RES, CHIP 10K (1005)
R218	1-208-863-81 s	RES, CHIP 100 (1005)
R220	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R221	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R222	1-208-935-81 s	RES, CHIP 100K (1005)
R223	1-220-878-81 s	RES, CHIP 22 (1005)
R224	1-220-878-81 s	RES, CHIP 22 (1005)
R225	1-208-887-81 s	RES, CHIP 1.0K (1005)
R226	1-208-863-81 s	RES, CHIP 100 (1005)
R227	1-208-903-81 s	RES, CHIP 4.7K (1005)
R228	1-208-903-81 s	RES, CHIP 4.7K (1005)
R229	1-208-927-81 s	RES, CHIP 47K (1005)
R230	1-208-911-81 s	RES, CHIP 10K (1005)
R231	1-208-863-81 s	RES, CHIP 100 (1005)
R232	1-220-870-81 s	RES, CHIP 10 (1005)
R233	1-220-870-81 s	RES, CHIP 10 (1005)
R234	1-208-871-81 s	RES, CHIP 220 (1005)
R235	1-208-875-81 s	RES, CHIP 330 (1005)
R236	1-208-911-81 s	RES, CHIP 10K (1005)
R237	1-208-927-81 s	RES, CHIP 47K (1005)
R238	1-208-863-81 s	RES, CHIP 100 (1005)
R239	1-208-863-81 s	RES, CHIP 100 (1005)
R242	1-208-911-81 s	RES, CHIP 10K (1005)
R244	1-208-911-81 s	RES, CHIP 10K (1005)
R245	1-208-863-81 s	RES, CHIP 100 (1005)
R246	1-220-870-81 s	RES, CHIP 10 (1005)
R247	1-220-870-81 s	RES, CHIP 10 (1005)
R248	1-208-855-81 s	RES, CHIP 47 (1005)
R249	1-208-855-81 s	RES, CHIP 47 (1005)
R250	1-208-863-81 s	RES, CHIP 100 (1005)
R251	1-208-855-81 s	RES, CHIP 47 (1005)
R252	1-208-855-81 s	RES, CHIP 47 (1005)
R253	1-208-855-81 s	RES, CHIP 47 (1005)
R254	1-208-863-81 s	RES, CHIP 100 (1005)
R255	1-208-863-81 s	RES, CHIP 100 (1005)
R256	1-208-863-81 s	RES, CHIP 100 (1005)
R257	1-220-870-81 s	RES, CHIP 10 (1005)
R258	1-220-870-81 s	RES, CHIP 10 (1005)
R259	1-208-935-81 s	RES, CHIP 100K (1005)
R260	1-208-935-81 s	RES, CHIP 100K (1005)
R261	1-208-863-81 s	RES, CHIP 100 (1005)
R262	1-208-863-81 s	RES, CHIP 100 (1005)
R263	1-208-863-81 s	RES, CHIP 100 (1005)
R264	1-208-863-81 s	RES, CHIP 100 (1005)
R265	1-208-863-81 s	RES, CHIP 100 (1005)
R266	1-208-863-81 s	RES, CHIP 100 (1005)
R267	1-208-863-81 s	RES, CHIP 100 (1005)
R268	1-208-863-81 s	RES, CHIP 100 (1005)

(SY-363 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R269	1-208-863-81 s	RES, CHIP 100 (1005)
R270	1-208-863-81 s	RES, CHIP 100 (1005)
R271	1-208-855-81 s	RES, CHIP 47 (1005)
R272	1-208-855-81 s	RES, CHIP 47 (1005)
R281	1-208-863-81 s	RES, CHIP 100 (1005)
R282	1-208-855-81 s	RES, CHIP 47 (1005)
R283	1-208-871-81 s	RES, CHIP 220 (1005)
R284	1-208-887-81 s	RES, CHIP 1.0K (1005)
R285	1-208-911-81 s	RES, CHIP 10K (1005)
R286	1-208-911-81 s	RES, CHIP 10K (1005)
R287	1-208-903-81 s	RES, CHIP 4.7K (1005)
R288	1-208-903-81 s	RES, CHIP 4.7K (1005)
R289	1-208-923-81 s	RES, CHIP 33K (1005)
R290	1-208-919-81 s	RES, CHIP 22K (1005)
R291	1-208-935-81 s	RES, CHIP 100K (1005)
R292	1-208-911-81 s	RES, CHIP 10K (1005)
R293	1-208-919-81 s	RES, CHIP 22K (1005)
R294	1-208-935-81 s	RES, CHIP 100K (1005)
R295	1-208-923-81 s	RES, CHIP 33K (1005)
R296	1-208-879-81 s	RES, CHIP 470 (1005)
R297	1-208-879-81 s	RES, CHIP 470 (1005)
R298	1-208-899-81 s	RES, CHIP 3.3K (1005)
R299	1-208-935-81 s	RES, CHIP 100K (1005)
R300	1-208-855-81 s	RES, CHIP 47 (1005)
R301	1-208-927-81 s	RES, CHIP 47K (1005)
R302	1-208-863-81 s	RES, CHIP 100 (1005)
R303	1-208-935-81 s	RES, CHIP 100K (1005)
R304	1-208-935-81 s	RES, CHIP 100K (1005)
R305	1-208-927-81 s	RES, CHIP 47K (1005)
R306	1-208-935-81 s	RES, CHIP 100K (1005)
R308	1-208-911-81 s	RES, CHIP 10K (1005)
R309	1-208-911-81 s	RES, CHIP 10K (1005)
R310	1-208-919-81 s	RES, CHIP 22K (1005)
R311	1-208-919-81 s	RES, CHIP 22K (1005)
R312	1-208-887-81 s	RES, CHIP 1.0K (1005)
R313	1-208-887-81 s	RES, CHIP 1.0K (1005)
R314	1-208-891-81 s	RES, CHIP 1.5K (1005)
R317	1-208-927-81 s	RES, CHIP 47K (1005)
R318	1-208-891-81 s	RES, CHIP 1.5K (1005)
R319	1-208-863-81 s	RES, CHIP 100 (1005)
R320	1-208-863-81 s	RES, CHIP 100 (1005)
R321	1-208-863-81 s	RES, CHIP 100 (1005)
R322	1-208-919-81 s	RES, CHIP 22K (1005)
R323	1-208-863-81 s	RES, CHIP 100 (1005)
R324	1-208-863-81 s	RES, CHIP 100 (1005)
R325	1-208-919-81 s	RES, CHIP 22K (1005)
R326	1-208-863-81 s	RES, CHIP 100 (1005)
R327	1-208-863-81 s	RES, CHIP 100 (1005)
R328	1-208-903-81 s	RES, CHIP 4.7K (1005)
R329	1-208-903-81 s	RES, CHIP 4.7K (1005)
R330	1-208-863-81 s	RES, CHIP 100 (1005)
R331	1-208-863-81 s	RES, CHIP 100 (1005)
R332	1-208-863-81 s	RES, CHIP 100 (1005)
R333	1-208-863-81 s	RES, CHIP 100 (1005)
R334	1-208-863-81 s	RES, CHIP 100 (1005)
R335	1-208-887-81 s	RES, CHIP 1.0K (1005)
R336	1-208-887-81 s	RES, CHIP 1.0K (1005)
R337	1-208-927-81 s	RES, CHIP 47K (1005)
R338	1-208-871-81 s	RES, CHIP 220 (1005)

(SY-363 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R341	1-208-871-81	s RES, CHIP 220 (1005)
R342	1-208-895-81	s RES, CHIP 2.2K (1005)
R343	1-208-927-81	s RES, CHIP 47K (1005)
R344	1-208-863-81	s RES, CHIP 100 (1005)
R345	1-208-891-81	s RES, CHIP 1.5K (1005)
R346	1-208-899-81	s RES, CHIP 3.3K (1005)
R347	1-208-927-81	s RES, CHIP 47K (1005)
R348	1-208-863-81	s RES, CHIP 100 (1005)
R349	1-208-863-81	s RES, CHIP 100 (1005)
R350	1-208-935-81	s RES, CHIP 100K (1005)
R351	1-208-935-81	s RES, CHIP 100K (1005)
R352	1-208-911-81	s RES, CHIP 10K (1005)
R353	1-208-911-81	s RES, CHIP 10K (1005)
R354	1-208-911-81	s RES, CHIP 10K (1005)
R355	1-208-903-81	s RES, CHIP 4.7K (1005)
R356	1-208-911-81	s RES, CHIP 10K (1005)
R357	1-208-887-81	s RES, CHIP 1.0K (1005)
R358	1-208-927-81	s RES, CHIP 47K (1005)
R359	1-208-903-81	s RES, CHIP 4.7K (1005)
R360	1-208-927-81	s RES, CHIP 47K (1005)
R361	1-220-870-81	s RES, CHIP 10 (1005)
R362	1-220-870-81	s RES, CHIP 10 (1005)
R363	1-208-927-81	s RES, CHIP 47K (1005)
R364	1-220-870-81	s RES, CHIP 10 (1005)
R365	1-220-870-81	s RES, CHIP 10 (1005)
R367	1-208-863-81	s RES, CHIP 100 (1005)
R368	1-208-887-81	s RES, CHIP 1.0K (1005)
R369	1-208-927-81	s RES, CHIP 47K (1005)
R371	1-208-911-81	s RES, CHIP 10K (1005)
R372	1-208-927-81	s RES, CHIP 47K (1005)
R373	1-208-907-81	s RES, CHIP 6.8K (1005)
R374	1-208-935-81	s RES, CHIP 100K (1005)
R375	1-208-935-81	s RES, CHIP 100K (1005)
R376	1-208-915-81	s RES, CHIP 15K (1005)
R377	1-208-915-81	s RES, CHIP 15K (1005)
R379	1-208-887-81	s RES, CHIP 1.0K (1005)
R380	1-208-935-81	s RES, CHIP 100K (1005)
R381	1-208-935-81	s RES, CHIP 100K (1005)
R382	1-208-863-81	s RES, CHIP 100 (1005)
R383	1-208-931-81	s RES, CHIP 68K (1005)
R384	1-208-887-81	s RES, CHIP 1.0K (1005)
R385	1-208-887-81	s RES, CHIP 1.0K (1005)
R386	1-208-927-81	s RES, CHIP 47K (1005)
R387	1-208-919-81	s RES, CHIP 22K (1005)
R388	1-208-923-81	s RES, CHIP 33K (1005)
R389	1-208-871-81	s RES, CHIP 220 (1005)
R390	1-208-911-81	s RES, CHIP 10K (1005)
R391	1-208-943-81	s RES, CHIP 220K (1005)
R392	1-208-903-81	s RES, CHIP 4.7K (1005)
R393	1-208-871-81	s RES, CHIP 220 (1005)
R394	1-208-943-81	s RES, CHIP 220K (1005)
R395	1-208-911-81	s RES, CHIP 10K (1005)
R396	1-208-871-81	s RES, CHIP 220 (1005)
R397	1-208-943-81	s RES, CHIP 220K (1005)
R398	1-208-935-81	s RES, CHIP 100K (1005)
R399	1-208-871-81	s RES, CHIP 220 (1005)
R400	1-208-871-81	s RES, CHIP 220 (1005)
R401	1-208-939-81	s RES, CHIP 150K (1005)
R402	1-208-931-81	s RES, CHIP 68K (1005)

(SY-363 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R404	1-208-927-81	s RES, CHIP 47K (1005)
R405	1-208-927-81	s RES, CHIP 47K (1005)
R406	1-208-919-81	s RES, CHIP 22K (1005)
R407	1-208-935-81	s RES, CHIP 100K (1005)
R408	1-208-923-81	s RES, CHIP 33K (1005)
R409	1-208-911-81	s RES, CHIP 10K (1005)
R410	1-208-927-81	s RES, CHIP 47K (1005)
R411	1-208-903-81	s RES, CHIP 4.7K (1005)
R412	1-208-911-81	s RES, CHIP 10K (1005)
R413	1-208-911-81	s RES, CHIP 10K (1005)
R414	1-208-911-81	s RES, CHIP 10K (1005)
R415	1-208-871-81	s RES, CHIP 220 (1005)
R416	1-208-871-81	s RES, CHIP 220 (1005)
R417	1-208-863-81	s RES, CHIP 100 (1005)
R418	1-208-863-81	s RES, CHIP 100 (1005)
R419	1-208-863-81	s RES, CHIP 100 (1005)
R420	1-208-939-81	s RES, CHIP 150K (1005)
R421	1-208-939-81	s RES, CHIP 150K (1005)
R422	1-208-939-81	s RES, CHIP 150K (1005)
R423	1-208-919-81	s RES, CHIP 22K (1005)
R424	1-208-915-81	s RES, CHIP 15K (1005)
R425	1-208-895-81	s RES, CHIP 2.2K (1005)
R426	1-208-871-81	s RES, CHIP 220 (1005)
R427	1-208-871-81	s RES, CHIP 220 (1005)
R428	1-208-871-81	s RES, CHIP 220 (1005)
R429	1-208-907-81	s RES, CHIP 6.8K (1005)
R430	1-208-887-81	s RES, CHIP 1.0K (1005)
R431	1-208-863-81	s RES, CHIP 100 (1005)
R432	1-208-863-81	s RES, CHIP 100 (1005)
R433	1-208-863-81	s RES, CHIP 100 (1005)
R434	1-208-863-81	s RES, CHIP 100 (1005)
R435	1-208-863-81	s RES, CHIP 100 (1005)
R436	1-208-863-81	s RES, CHIP 100 (1005)
R437	1-208-855-81	s RES, CHIP 47 (1005)
R438	1-208-855-81	s RES, CHIP 47 (1005)
R439	1-208-855-81	s RES, CHIP 47 (1005)
R440	1-208-863-81	s RES, CHIP 100 (1005)
R441	1-208-863-81	s RES, CHIP 100 (1005)
R442	1-208-895-81	s RES, CHIP 2.2K (1005)
R443	1-208-895-81	s RES, CHIP 2.2K (1005)
R494	1-208-923-81	s RES, CHIP 33K (1005)
R495	1-208-923-81	s RES, CHIP 33K (1005)
R496	1-208-911-81	s RES, CHIP 10K (1005)
R497	1-208-935-81	s RES, CHIP 100K (1005)
R498	1-208-935-81	s RES, CHIP 100K (1005)
R499	1-208-935-81	s RES, CHIP 100K (1005)
R500	1-208-863-81	s RES, CHIP 100 (1005)
R501	1-208-863-81	s RES, CHIP 100 (1005)
R502	1-208-863-81	s RES, CHIP 100 (1005)
R503	1-208-903-81	s RES, CHIP 4.7K (1005)
R504	1-208-903-81	s RES, CHIP 4.7K (1005)
R505	1-208-887-81	s RES, CHIP 1.0K (1005)
R506	1-208-923-81	s RES, CHIP 33K (1005)
R507	1-208-919-81	s RES, CHIP 22K (1005)
R508	1-208-919-81	s RES, CHIP 22K (1005)
R509	1-220-870-81	s RES, CHIP 10 (1005)
R510	1-220-870-81	s RES, CHIP 10 (1005)
R511	1-208-927-81	s RES, CHIP 47K (1005)
R512	1-208-871-81	s RES, CHIP 220 (1005)

(SY-363 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R513	1-208-887-81 s	RES, CHIP 1.0K (1005)
R514	1-208-863-81 s	RES, CHIP 100 (1005)
R515	1-208-911-81 s	RES, CHIP 10K (1005)
R516	1-218-989-81 s	RES, CHIP 1M
R517	1-220-870-81 s	RES, CHIP 10 (1005)
R518	1-220-870-81 s	RES, CHIP 10 (1005)
R519	1-208-863-81 s	RES, CHIP 100 (1005)
R520	1-208-855-81 s	RES, CHIP 47 (1005)
R521	1-208-855-81 s	RES, CHIP 47 (1005)
R522	1-208-855-81 s	RES, CHIP 47 (1005)
R523	1-208-863-81 s	RES, CHIP 100 (1005)
R524	1-208-863-81 s	RES, CHIP 100 (1005)
R525	1-208-863-81 s	RES, CHIP 100 (1005)
R526	1-208-863-81 s	RES, CHIP 100 (1005)
R527	1-208-863-81 s	RES, CHIP 100 (1005)
R528	1-208-863-81 s	RES, CHIP 100 (1005)
R529	1-208-855-81 s	RES, CHIP 47 (1005)
R530	1-208-863-81 s	RES, CHIP 100 (1005)
R531	1-208-863-81 s	RES, CHIP 100 (1005)
R532	1-208-863-81 s	RES, CHIP 100 (1005)
R533	1-208-863-81 s	RES, CHIP 100 (1005)
R534	1-208-863-81 s	RES, CHIP 100 (1005)
R535	1-208-863-81 s	RES, CHIP 100 (1005)
R536	1-208-863-81 s	RES, CHIP 100 (1005)
R537	1-208-863-81 s	RES, CHIP 100 (1005)
R538	1-208-863-81 s	RES, CHIP 100 (1005)
R539	1-220-870-81 s	RES, CHIP 10 (1005)
R540	1-208-911-81 s	RES, CHIP 10K (1005)
R541	1-208-863-81 s	RES, CHIP 100 (1005)
R542	1-208-863-81 s	RES, CHIP 100 (1005)
R543	1-208-863-81 s	RES, CHIP 100 (1005)
R544	1-208-863-81 s	RES, CHIP 100 (1005)
R545	1-208-863-81 s	RES, CHIP 100 (1005)
R546	1-208-927-81 s	RES, CHIP 47K (1005)
R547	1-208-927-81 s	RES, CHIP 47K (1005)
R548	1-208-927-81 s	RES, CHIP 47K (1005)
R549	1-208-927-81 s	RES, CHIP 47K (1005)
R550	1-208-911-81 s	RES, CHIP 10K (1005)
R551	1-208-863-81 s	RES, CHIP 100 (1005)
R552	1-208-863-81 s	RES, CHIP 100 (1005)
R553	1-208-863-81 s	RES, CHIP 100 (1005)
R554	1-208-863-81 s	RES, CHIP 100 (1005)
R555	1-208-863-81 s	RES, CHIP 100 (1005)
R556	1-208-863-81 s	RES, CHIP 100 (1005)
R557	1-208-863-81 s	RES, CHIP 100 (1005)
R558	1-208-927-81 s	RES, CHIP 47K (1005)
R559	1-208-863-81 s	RES, CHIP 100 (1005)
R560	1-208-863-81 s	RES, CHIP 100 (1005)
R561	1-208-863-81 s	RES, CHIP 100 (1005)
R562	1-208-863-81 s	RES, CHIP 100 (1005)
R563	1-208-863-81 s	RES, CHIP 100 (1005)
R567	1-208-903-81 s	RES, CHIP 4.7K (1005)
R568	1-208-903-81 s	RES, CHIP 4.7K (1005)
R569	1-208-903-81 s	RES, CHIP 4.7K (1005)
R570	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R571	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R572	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R574	1-208-875-81 s	RES, CHIP 330 (1005)
R575	1-208-875-81 s	RES, CHIP 330 (1005)

(SY-363 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R576	1-208-875-81 s	RES, CHIP 330 (1005)
R577	1-220-870-81 s	RES, CHIP 10 (1005)
R578	1-220-870-81 s	RES, CHIP 10 (1005)
R579	1-208-879-81 s	RES, CHIP 470 (1005)
R580	1-208-859-81 s	RES, CHIP 68 (1005)
R581	1-208-887-81 s	RES, CHIP 1.0K (1005)
R582	1-208-887-81 s	RES, CHIP 1.0K (1005)
R583	1-208-879-81 s	RES, CHIP 470 (1005)
R584	1-208-887-81 s	RES, CHIP 1.0K (1005)
R585	1-208-887-81 s	RES, CHIP 1.0K (1005)
R586	1-208-887-81 s	RES, CHIP 1.0K (1005)
R587	1-208-887-81 s	RES, CHIP 1.0K (1005)
R588	1-208-887-81 s	RES, CHIP 1.0K (1005)
R589	1-208-863-81 s	RES, CHIP 100 (1005)
R590	1-208-863-81 s	RES, CHIP 100 (1005)
R591	1-208-879-81 s	RES, CHIP 470 (1005)
R592	1-208-863-81 s	RES, CHIP 100 (1005)
R593	1-208-867-81 s	RES, CHIP 150 (1005)
R594	1-208-867-81 s	RES, CHIP 150 (1005)
R595	1-208-867-81 s	RES, CHIP 150 (1005)
R596	1-208-867-81 s	RES, CHIP 150 (1005)
R597	1-208-867-81 s	RES, CHIP 150 (1005)
R598	1-208-867-81 s	RES, CHIP 150 (1005)
R599	1-208-867-81 s	RES, CHIP 150 (1005)
R600	1-208-867-81 s	RES, CHIP 150 (1005)
R601	1-208-867-81 s	RES, CHIP 150 (1005)
R602	1-208-867-81 s	RES, CHIP 150 (1005)
R603	1-208-871-81 s	RES, CHIP 220 (1005)
R605	1-220-870-81 s	RES, CHIP 10 (1005)
R606	1-208-863-81 s	RES, CHIP 100 (1005)
R607	1-208-863-81 s	RES, CHIP 100 (1005)
R608	1-208-863-81 s	RES, CHIP 100 (1005)
R609	1-208-899-81 s	RES, CHIP 3.3K (1005)
R611	1-208-879-81 s	RES, CHIP 470 (1005)
R612	1-208-899-81 s	RES, CHIP 3.3K (1005)
R613	1-208-863-81 s	RES, CHIP 100 (1005)
R614	1-208-887-81 s	RES, CHIP 1.0K (1005)
R615	1-208-879-81 s	RES, CHIP 470 (1005)
R617	1-208-911-81 s	RES, CHIP 10K (1005)
R619	1-208-891-81 s	RES, CHIP 1.5K (1005)
R621	1-220-870-81 s	RES, CHIP 10 (1005)
R622	1-208-899-81 s	RES, CHIP 3.3K (1005)
R623	1-208-895-81 s	RES, CHIP 2.2K (1005)
R624	1-208-879-81 s	RES, CHIP 470 (1005)
R625	1-208-895-81 s	RES, CHIP 2.2K (1005)
R626	1-208-879-81 s	RES, CHIP 470 (1005)
R627	1-208-863-81 s	RES, CHIP 100 (1005)
R629	1-208-863-81 s	RES, CHIP 100 (1005)
R632	1-208-863-81 s	RES, CHIP 100 (1005)
R633	1-208-899-81 s	RES, CHIP 3.3K (1005)
R634	1-208-895-81 s	RES, CHIP 2.2K (1005)
R635	1-208-875-81 s	RES, CHIP 330 (1005)
R636	1-208-867-81 s	RES, CHIP 150 (1005)
R637	1-208-867-81 s	RES, CHIP 150 (1005)
R638	1-208-887-81 s	RES, CHIP 1.0K (1005)
R639	1-208-899-81 s	RES, CHIP 3.3K (1005)
R640	1-208-863-81 s	RES, CHIP 100 (1005)
R641	1-208-911-81 s	RES, CHIP 10K (1005)
R642	1-220-878-81 s	RES, CHIP 22 (1005)

(SY-363 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R643	1-208-883-81	s RES, CHIP 680 (1005)
R644	1-208-883-81	s RES, CHIP 680 (1005)
R645	1-208-871-81	s RES, CHIP 220 (1005)
R646	1-208-899-81	s RES, CHIP 3.3K (1005)
R647	1-208-875-81	s RES, CHIP 330 (1005)
R648	1-208-863-81	s RES, CHIP 100 (1005)
R649	1-218-990-81	s CONDUCTOR, CHIP (1005)
R650	1-208-895-81	s RES, CHIP 2.2K (1005)
R651	1-208-891-81	s RES, CHIP 1.5K (1005)
R653	1-208-879-81	s RES, CHIP 470 (1005)
R654	1-208-879-81	s RES, CHIP 470 (1005)
R655	1-208-879-81	s RES, CHIP 470 (1005)
R656	1-208-899-81	s RES, CHIP 3.3K (1005)
R657	1-208-863-81	s RES, CHIP 100 (1005)
R659	1-208-911-81	s RES, CHIP 10K (1005)
R660	1-208-887-81	s RES, CHIP 1.0K (1005)
R661	1-208-883-81	s RES, CHIP 680 (1005)
R662	1-208-895-81	s RES, CHIP 2.2K (1005)
R663	1-208-863-81	s RES, CHIP 100 (1005)
R664	1-220-870-81	s RES, CHIP 10 (1005)
R665	1-220-870-81	s RES, CHIP 10 (1005)
R667	1-218-990-81	s CONDUCTOR, CHIP (1005)
R668	1-208-887-81	s RES, CHIP 1.0K (1005)
R669	1-208-863-81	s RES, CHIP 100 (1005)
R671	1-208-887-81	s RES, CHIP 1.0K (1005)
R672	1-208-887-81	s RES, CHIP 1.0K (1005)
R673	1-208-867-81	s RES, CHIP 150 (1005)
R674	1-208-867-81	s RES, CHIP 150 (1005)
R675	1-208-887-81	s RES, CHIP 1.0K (1005)
R676	1-208-887-81	s RES, CHIP 1.0K (1005)
R677	1-208-875-81	s RES, CHIP 330 (1005)
R678	1-208-875-81	s RES, CHIP 330 (1005)
R681	1-208-887-81	s RES, CHIP 1.0K (1005)
R682	1-208-919-81	s RES, CHIP 22K (1005)
R683	1-208-863-81	s RES, CHIP 100 (1005)
R684	1-208-887-81	s RES, CHIP 1.0K (1005)
R685	1-220-870-81	s RES, CHIP 10 (1005)
R686	1-208-887-81	s RES, CHIP 1.0K (1005)
R687	1-208-887-81	s RES, CHIP 1.0K (1005)
R688	1-208-883-81	s RES, CHIP 680 (1005)
R689	1-218-990-81	s CONDUCTOR, CHIP (1005)
R690	1-208-867-81	s RES, CHIP 150 (1005)
R691	1-208-867-81	s RES, CHIP 150 (1005)
R692	1-208-871-81	s RES, CHIP 220 (1005)
R693	1-208-875-81	s RES, CHIP 330 (1005)
R695	1-208-891-81	s RES, CHIP 1.5K (1005)
R697	1-208-879-81	s RES, CHIP 470 (1005)
R698	1-208-867-81	s RES, CHIP 150 (1005)
R699	1-208-867-81	s RES, CHIP 150 (1005)
R700	1-208-879-81	s RES, CHIP 470 (1005)
R701	1-208-863-81	s RES, CHIP 100 (1005)
R702	1-208-899-81	s RES, CHIP 3.3K (1005)
R704	1-208-915-81	s RES, CHIP 15K (1005)
R706	1-218-990-81	s CONDUCTOR, CHIP (1005)
R707	1-208-863-81	s RES, CHIP 100 (1005)
R708	1-208-863-81	s RES, CHIP 100 (1005)
R709	1-208-895-81	s RES, CHIP 2.2K (1005)
R710	1-208-899-81	s RES, CHIP 3.3K (1005)
R711	1-208-887-81	s RES, CHIP 1.0K (1005)

(SY-363 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R712	1-208-863-81	s RES, CHIP 100 (1005)
R713	1-208-863-81	s RES, CHIP 100 (1005)
R714	1-208-863-81	s RES, CHIP 100 (1005)
R715	1-208-863-81	s RES, CHIP 100 (1005)
R716	1-208-855-81	s RES, CHIP 47 (1005)
R717	1-208-955-81	s RES, CHIP 680K (1005)
R718	1-208-951-81	s RES, CHIP 470K (1005)
R719	1-208-887-81	s RES, CHIP 1.0K (1005)
R720	1-208-887-81	s RES, CHIP 1.0K (1005)
R721	1-208-939-81	s RES, CHIP 150K (1005)
R722	1-208-935-81	s RES, CHIP 100K (1005)
R723	1-208-955-81	s RES, CHIP 680K (1005)
R724	1-208-875-81	s RES, CHIP 330 (1005)
R725	1-208-855-81	s RES, CHIP 47 (1005)
R726	1-208-871-81	s RES, CHIP 220 (1005)
R727	1-208-855-81	s RES, CHIP 47 (1005)
R728	1-208-887-81	s RES, CHIP 1.0K (1005)
R729	1-208-855-81	s RES, CHIP 47 (1005)
R730	1-208-863-81	s RES, CHIP 100 (1005)
R731	1-208-863-81	s RES, CHIP 100 (1005)
R732	1-208-903-81	s RES, CHIP 4.7K (1005)
R733	1-208-863-81	s RES, CHIP 100 (1005)
R734	1-208-911-81	s RES, CHIP 10K (1005)
R735	1-208-911-81	s RES, CHIP 10K (1005)
R736	1-208-863-81	s RES, CHIP 100 (1005)
R737	1-208-863-81	s RES, CHIP 100 (1005)
R738	1-208-863-81	s RES, CHIP 100 (1005)
R739	1-208-863-81	s RES, CHIP 100 (1005)
R740	1-208-863-81	s RES, CHIP 100 (1005)
R741	1-208-863-81	s RES, CHIP 100 (1005)
R742	1-208-863-81	s RES, CHIP 100 (1005)
R743	1-208-899-81	s RES, CHIP 3.3K (1005)
R744	1-208-863-81	s RES, CHIP 100 (1005)
R745	1-208-895-81	s RES, CHIP 2.2K (1005)
R746	1-208-911-81	s RES, CHIP 10K (1005)
R747	1-208-887-81	s RES, CHIP 1.0K (1005)
R751	1-208-911-81	s RES, CHIP 10K (1005)
R752	1-208-919-81	s RES, CHIP 22K (1005)
R753	1-208-863-81	s RES, CHIP 100 (1005)
R754	1-208-863-81	s RES, CHIP 100 (1005)
R755	1-208-855-81	s RES, CHIP 47 (1005)
R756	1-208-887-81	s RES, CHIP 1.0K (1005)
R757	1-208-887-81	s RES, CHIP 1.0K (1005)
R758	1-208-863-81	s RES, CHIP 100 (1005)
R761	1-208-903-81	s RES, CHIP 4.7K (1005)
R762	1-208-915-81	s RES, CHIP 15K (1005)
R763	1-208-915-81	s RES, CHIP 15K (1005)
R764	1-208-903-81	s RES, CHIP 4.7K (1005)
R765	1-208-915-81	s RES, CHIP 15K (1005)
R766	1-208-915-81	s RES, CHIP 15K (1005)
R768	1-208-935-81	s RES, CHIP 100K (1005)
R769	1-208-935-81	s RES, CHIP 100K (1005)
R770	1-208-927-81	s RES, CHIP 47K (1005)
R771	1-208-927-81	s RES, CHIP 47K (1005)
R772	1-208-903-81	s RES, CHIP 4.7K (1005)
R773	1-208-927-81	s RES, CHIP 47K (1005)
R774	1-208-927-81	s RES, CHIP 47K (1005)
R775	1-208-943-81	s RES, CHIP 220K (1005)
R776	1-208-943-81	s RES, CHIP 220K (1005)

(SY-363 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R777	1-208-915-81 s	RES, CHIP 15K (1005)
R778	1-208-915-81 s	RES, CHIP 15K (1005)
R779	1-208-915-81 s	RES, CHIP 15K (1005)
R780	1-208-915-81 s	RES, CHIP 15K (1005)
R781	1-208-903-81 s	RES, CHIP 4.7K (1005)
R782	1-208-903-81 s	RES, CHIP 4.7K (1005)
R783	1-208-911-81 s	RES, CHIP 10K (1005)
R784	1-208-911-81 s	RES, CHIP 10K (1005)
R785	1-208-935-81 s	RES, CHIP 100K (1005)
R786	1-208-935-81 s	RES, CHIP 100K (1005)
R787	1-218-989-81 s	RES, CHIP 1M
R788	1-218-989-81 s	RES, CHIP 1M
R789	1-208-911-81 s	RES, CHIP 10K (1005)
R790	1-208-911-81 s	RES, CHIP 10K (1005)
R791	1-208-911-81 s	RES, CHIP 10K (1005)
R792	1-208-911-81 s	RES, CHIP 10K (1005)
R793	1-208-895-81 s	RES, CHIP 2.2K (1005)
R794	1-208-895-81 s	RES, CHIP 2.2K (1005)
R795	1-208-927-81 s	RES, CHIP 47K (1005)
R796	1-208-927-81 s	RES, CHIP 47K (1005)
R797	1-208-855-81 s	RES, CHIP 47 (1005)
R801	1-208-863-81 s	RES, CHIP 100 (1005)
R802	1-208-863-81 s	RES, CHIP 100 (1005)
R803	1-208-855-81 s	RES, CHIP 47 (1005)
R804	1-208-911-81 s	RES, CHIP 10K (1005)
R805	1-208-911-81 s	RES, CHIP 10K (1005)
R806	1-208-911-81 s	RES, CHIP 10K (1005)
R807	1-208-855-81 s	RES, CHIP 47 (1005)
R808	1-208-903-81 s	RES, CHIP 4.7K (1005)
R809	1-208-899-81 s	RES, CHIP 3.3K (1005)
R810	1-208-903-81 s	RES, CHIP 4.7K (1005)
R811	1-208-903-81 s	RES, CHIP 4.7K (1005)
R812	1-208-899-81 s	RES, CHIP 3.3K (1005)
R813	1-208-911-81 s	RES, CHIP 10K (1005)
R814	1-208-911-81 s	RES, CHIP 10K (1005)
R815	1-208-855-81 s	RES, CHIP 47 (1005)
R816	1-208-903-81 s	RES, CHIP 4.7K (1005)
R817	1-208-891-81 s	RES, CHIP 1.5K (1005)
R818	1-208-891-81 s	RES, CHIP 1.5K (1005)
R819	1-208-911-81 s	RES, CHIP 10K (1005)
R820	1-208-911-81 s	RES, CHIP 10K (1005)
R821	1-208-943-81 s	RES, CHIP 220K (1005)
R822	1-208-943-81 s	RES, CHIP 220K (1005)
R823	1-208-927-81 s	RES, CHIP 47K (1005)
R824	1-208-927-81 s	RES, CHIP 47K (1005)
R825	1-208-927-81 s	RES, CHIP 47K (1005)
R826	1-208-927-81 s	RES, CHIP 47K (1005)
R827	1-208-943-81 s	RES, CHIP 220K (1005)
R828	1-208-943-81 s	RES, CHIP 220K (1005)
R829	1-208-915-81 s	RES, CHIP 15K (1005)
R830	1-208-915-81 s	RES, CHIP 15K (1005)
R831	1-208-915-81 s	RES, CHIP 15K (1005)
R832	1-208-915-81 s	RES, CHIP 15K (1005)
R833	1-208-911-81 s	RES, CHIP 10K (1005)
R834	1-208-911-81 s	RES, CHIP 10K (1005)
R835	1-208-935-81 s	RES, CHIP 100K (1005)
R836	1-208-887-81 s	RES, CHIP 1.0K (1005)
R837	1-208-887-81 s	RES, CHIP 1.0K (1005)
R838	1-208-935-81 s	RES, CHIP 100K (1005)

(SY-363 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R839	1-208-927-81 s	RES, CHIP 47K (1005)
R840	1-208-927-81 s	RES, CHIP 47K (1005)
R841	1-208-911-81 s	RES, CHIP 10K (1005)
R842	1-208-911-81 s	RES, CHIP 10K (1005)
R843	1-208-911-81 s	RES, CHIP 10K (1005)
R844	1-208-935-81 s	RES, CHIP 100K (1005)
R845	1-208-887-81 s	RES, CHIP 1.0K (1005)
R846	1-208-887-81 s	RES, CHIP 1.0K (1005)
R847	1-208-935-81 s	RES, CHIP 100K (1005)
R849	1-208-911-81 s	RES, CHIP 10K (1005)
R851	1-208-935-81 s	RES, CHIP 100K (1005)
R852	1-208-935-81 s	RES, CHIP 100K (1005)
R853	1-220-870-81 s	RES, CHIP 10 (1005)
R854	1-220-870-81 s	RES, CHIP 10 (1005)
R855	1-220-253-91 s	RES, SQUARE TYPE CHIP 47(3225)
R856	1-220-253-91 s	RES, SQUARE TYPE CHIP 47(3225)
R857	1-208-903-81 s	RES, CHIP 4.7K (1005)
R858	1-208-911-81 s	RES, CHIP 10K (1005)
R859	1-208-903-81 s	RES, CHIP 4.7K (1005)
R860	1-208-911-81 s	RES, CHIP 10K (1005)
R861	1-220-870-81 s	RES, CHIP 10 (1005)
R862	1-220-870-81 s	RES, CHIP 10 (1005)
R863	1-220-253-91 s	RES, SQUARE TYPE CHIP 47(3225)
R864	1-220-253-91 s	RES, SQUARE TYPE CHIP 47(3225)
R865	1-208-903-81 s	RES, CHIP 4.7K (1005)
R866	1-208-903-81 s	RES, CHIP 4.7K (1005)
R867	1-208-863-81 s	RES, CHIP 100 (1005)
R868	1-208-863-81 s	RES, CHIP 100 (1005)
R871	1-208-927-81 s	RES, CHIP 47K (1005)
R872	1-208-943-81 s	RES, CHIP 220K (1005)
R873	1-208-927-81 s	RES, CHIP 47K (1005)
R874	1-208-927-81 s	RES, CHIP 47K (1005)
R875	1-208-927-81 s	RES, CHIP 47K (1005)
R877	1-208-927-81 s	RES, CHIP 47K (1005)
R878	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R879	1-208-863-81 s	RES, CHIP 100 (1005)
R882	1-208-863-81 s	RES, CHIP 100 (1005)
R883	1-208-927-81 s	RES, CHIP 47K (1005)
R885	1-208-943-81 s	RES, CHIP 220K (1005)
R886	1-208-863-81 s	RES, CHIP 100 (1005)
R887	1-208-863-81 s	RES, CHIP 100 (1005)
R888	1-208-927-81 s	RES, CHIP 47K (1005)
R889	1-208-887-81 s	RES, CHIP 1.0K (1005)
R891	1-208-927-81 s	RES, CHIP 47K (1005)
R893	1-208-863-81 s	RES, CHIP 100 (1005)
R894	1-208-955-81 s	RES, CHIP 680K (1005)
R895	1-208-911-81 s	RES, CHIP 10K (1005)
R896	1-208-887-81 s	RES, CHIP 1.0K (1005)
R897	1-208-955-81 s	RES, CHIP 680K (1005)
R898	1-208-911-81 s	RES, CHIP 10K (1005)
R899	1-208-911-81 s	RES, CHIP 10K (1005)
R900	1-208-911-81 s	RES, CHIP 10K (1005)
R901	1-208-863-81 s	RES, CHIP 100 (1005)
R902	1-208-863-81 s	RES, CHIP 100 (1005)
R903	1-208-863-81 s	RES, CHIP 100 (1005)
R904	1-208-911-81 s	RES, CHIP 10K (1005)
R905	1-208-911-81 s	RES, CHIP 10K (1005)
R906	1-208-863-81 s	RES, CHIP 100 (1005)
R907	1-208-863-81 s	RES, CHIP 100 (1005)

(SY-363 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R908	1-208-863-81	s RES, CHIP 100 (1005)
R909	1-208-863-81	s RES, CHIP 100 (1005)
R911	1-208-863-81	s RES, CHIP 100 (1005)
R913	1-208-935-81	s RES, CHIP 100K (1005)
R914	1-208-863-81	s RES, CHIP 100 (1005)
R915	1-208-863-81	s RES, CHIP 100 (1005)
R916	1-208-887-81	s RES, CHIP 1.0K (1005)
R917	1-208-887-81	s RES, CHIP 1.0K (1005)
R918	1-208-887-81	s RES, CHIP 1.0K (1005)
R919	1-208-887-81	s RES, CHIP 1.0K (1005)
R920	1-208-887-81	s RES, CHIP 1.0K (1005)
R921	1-208-887-81	s RES, CHIP 1.0K (1005)
R922	1-208-863-81	s RES, CHIP 100 (1005)
R923	1-208-887-81	s RES, CHIP 1.0K (1005)
R924	1-208-887-81	s RES, CHIP 1.0K (1005)
R925	1-208-887-81	s RES, CHIP 1.0K (1005)
R926	1-208-927-81	s RES, CHIP 47K (1005)
R927	1-208-887-81	s RES, CHIP 1.0K (1005)
R929	1-208-863-81	s RES, CHIP 100 (1005)
R930	1-208-863-81	s RES, CHIP 100 (1005)
R931	1-208-943-81	s RES, CHIP 220K (1005)
R932	1-208-943-81	s RES, CHIP 220K (1005)
R933	1-208-911-81	s RES, CHIP 10K (1005)
R934	1-208-911-81	s RES, CHIP 10K (1005)
R935	1-208-891-81	s RES, CHIP 1.5K (1005)
R936	1-208-887-81	s RES, CHIP 1.0K (1005)
R937	1-208-911-81	s RES, CHIP 10K (1005)
R938	1-208-879-81	s RES, CHIP 470 (1005)
R939	1-208-903-81	s RES, CHIP 4.7K (1005)
R940	1-208-911-81	s RES, CHIP 10K (1005)
R941	1-220-870-81	s RES, CHIP 10 (1005)
R942	1-208-887-81	s RES, CHIP 1.0K (1005)
R943	1-208-887-81	s RES, CHIP 1.0K (1005)
R944	1-208-911-81	s RES, CHIP 10K (1005)
R945	1-208-911-81	s RES, CHIP 10K (1005)
R946	1-220-870-81	s RES, CHIP 10 (1005)
R947	1-208-919-81	s RES, CHIP 22K (1005)
R948	1-208-899-81	s RES, CHIP 3.3K (1005)
R949	1-208-879-81	s RES, CHIP 470 (1005)
R950	1-220-870-81	s RES, CHIP 10 (1005)
R951	1-220-870-81	s RES, CHIP 10 (1005)
R952	1-220-878-81	s RES, CHIP 22 (1005)
R953	1-208-895-81	s RES, CHIP 2.2K (1005)
R954	1-208-879-81	s RES, CHIP 470 (1005)
R955	1-208-895-81	s RES, CHIP 2.2K (1005)
R956	1-220-870-81	s RES, CHIP 10 (1005)
R957	1-208-899-81	s RES, CHIP 3.3K (1005)
R958	1-208-879-81	s RES, CHIP 470 (1005)
R959	1-220-870-81	s RES, CHIP 10 (1005)
R960	1-220-870-81	s RES, CHIP 10 (1005)
R961	1-220-870-81	s RES, CHIP 10 (1005)
R962	1-208-911-81	s RES, CHIP 10K (1005)
R963	1-208-879-81	s RES, CHIP 470 (1005)
R964	1-208-943-81	s RES, CHIP 220K (1005)
R965	1-208-919-81	s RES, CHIP 22K (1005)
R966	1-208-919-81	s RES, CHIP 22K (1005)
R967	1-208-879-81	s RES, CHIP 470 (1005)
R968	1-220-870-81	s RES, CHIP 10 (1005)
R969	1-220-870-81	s RES, CHIP 10 (1005)

(SY-363 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R970	1-208-919-81	s RES, CHIP 22K (1005)
R971	1-208-887-81	s RES, CHIP 1.0K (1005)
R972	1-208-887-81	s RES, CHIP 1.0K (1005)
R973	1-208-887-81	s RES, CHIP 1.0K (1005)
R974	1-208-919-81	s RES, CHIP 22K (1005)
R975	1-208-943-81	s RES, CHIP 220K (1005)
R976	1-208-943-81	s RES, CHIP 220K (1005)
R977	1-208-919-81	s RES, CHIP 22K (1005)
R978	1-208-911-81	s RES, CHIP 10K (1005)
R979	1-220-870-81	s RES, CHIP 10 (1005)
R980	1-220-870-81	s RES, CHIP 10 (1005)
R982	1-208-919-81	s RES, CHIP 22K (1005)
R983	1-208-927-81	s RES, CHIP 47K (1005)
R984	1-208-935-81	s RES, CHIP 100K (1005)
R985	1-218-989-81	s RES, CHIP 1M
R986	1-208-899-81	s RES, CHIP 3.3K (1005)
R987	1-208-863-81	s RES, CHIP 100 (1005)
R988	1-208-903-81	s RES, CHIP 4.7K (1005)
R989	1-208-943-81	s RES, CHIP 220K (1005)
R990	1-208-923-81	s RES, CHIP 33K (1005)
R991	1-208-935-81	s RES, CHIP 100K (1005)
R992	1-208-919-81	s RES, CHIP 22K (1005)
R993	1-208-919-81	s RES, CHIP 22K (1005)
R994	1-208-903-81	s RES, CHIP 4.7K (1005)
R995	1-208-911-81	s RES, CHIP 10K (1005)
R996	1-208-903-81	s RES, CHIP 4.7K (1005)
R997	1-208-907-81	s RES, CHIP 6.8K (1005)
R998	1-218-990-81	s CONDUCTOR, CHIP (1005)
R999	1-208-927-81	s RES, CHIP 47K (1005)
R1000	1-208-887-81	s RES, CHIP 1.0K (1005)
R1001	1-208-923-81	s RES, CHIP 33K (1005)
R1002	1-208-927-81	s RES, CHIP 47K (1005)
R1004	1-208-911-81	s RES, CHIP 10K (1005)
R1005	1-218-989-81	s RES, CHIP 1M
R1006	1-208-887-81	s RES, CHIP 1.0K (1005)
R1007	1-208-887-81	s RES, CHIP 1.0K (1005)
R1008	1-218-989-81	s RES, CHIP 1M
R1009	1-208-887-81	s RES, CHIP 1.0K (1005)
R1010	1-208-923-81	s RES, CHIP 33K (1005)
R1011	1-208-943-81	s RES, CHIP 220K (1005)
R1012	1-208-903-81	s RES, CHIP 4.7K (1005)
R1013	1-208-923-81	s RES, CHIP 33K (1005)
R1014	1-208-903-81	s RES, CHIP 4.7K (1005)
R1015	1-208-943-81	s RES, CHIP 220K (1005)
R1016	1-208-927-81	s RES, CHIP 47K (1005)
R1019	1-208-911-81	s RES, CHIP 10K (1005)
R1020	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1021	1-208-863-81	s RES, CHIP 100 (1005)
R1022	1-208-863-81	s RES, CHIP 100 (1005)
R1023	1-208-911-81	s RES, CHIP 10K (1005)
R1024	1-220-253-91	s RES, SQUARE TYPE CHIP 47(3225)
R1025	1-208-911-81	s RES, CHIP 10K (1005)
R1026	1-208-895-81	s RES, CHIP 2.2K (1005)
R1027	1-208-863-81	s RES, CHIP 100 (1005)
R1028	1-208-911-81	s RES, CHIP 10K (1005)
R1029	1-208-911-81	s RES, CHIP 10K (1005)
R1030	1-208-863-81	s RES, CHIP 100 (1005)
R1031	1-208-911-81	s RES, CHIP 10K (1005)
R1032	1-208-863-81	s RES, CHIP 100 (1005)

(SY-363 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R1033	1-220-253-91 s	RES, SQUARE TYPE CHIP 47(3225)
R1034	1-208-887-81 s	RES, CHIP 1.0K (1005)
R1035	1-208-903-81 s	RES, CHIP 4.7K (1005)
R1036	1-208-923-81 s	RES, CHIP 33K (1005)
R1037	1-208-927-81 s	RES, CHIP 47K (1005)
R1038	1-208-863-81 s	RES, CHIP 100 (1005)
R1039	1-208-903-81 s	RES, CHIP 4.7K (1005)
R1040	1-208-911-81 s	RES, CHIP 10K (1005)
R1041	1-208-911-81 s	RES, CHIP 10K (1005)
R1042	1-208-927-81 s	RES, CHIP 47K (1005)
R1043	1-208-915-81 s	RES, CHIP 15K (1005)
R1044	1-220-870-81 s	RES, CHIP 10 (1005)
R1045	1-208-915-81 s	RES, CHIP 15K (1005)
R1046	1-208-935-81 s	RES, CHIP 100K (1005)
R1047	1-208-911-81 s	RES, CHIP 10K (1005)
R1048	1-208-895-81 s	RES, CHIP 2.2K (1005)
R1049	1-208-911-81 s	RES, CHIP 10K (1005)
R1050	1-208-911-81 s	RES, CHIP 10K (1005)
R1052	1-208-903-81 s	RES, CHIP 4.7K (1005)
R1054	1-208-887-81 s	RES, CHIP 1.0K (1005)
R1056	1-208-887-81 s	RES, CHIP 1.0K (1005)
R1058	1-208-887-81 s	RES, CHIP 1.0K (1005)
R1063	1-208-919-81 s	RES, CHIP 22K (1005)
R1065	1-208-927-81 s	RES, CHIP 47K (1005)
R1066	1-208-927-81 s	RES, CHIP 47K (1005)
R1067	1-208-927-81 s	RES, CHIP 47K (1005)
R1068	1-208-927-81 s	RES, CHIP 47K (1005)
R1069	1-208-927-81 s	RES, CHIP 47K (1005)
R1070	1-208-927-81 s	RES, CHIP 47K (1005)
R1073	1-208-919-81 s	RES, CHIP 22K (1005)
R1077	1-218-871-91 s	RES, CHIP 10K (1608)
R1078	1-218-871-91 s	RES, CHIP 10K (1608)
R1079	1-216-837-91 s	RES, CHIP 22K (1608)
R1080	1-216-837-91 s	RES, CHIP 22K (1608)
R1081	1-218-871-91 s	RES, CHIP 10K (1608)
R1084	1-216-837-91 s	RES, CHIP 22K (1608)
R1085	1-216-837-91 s	RES, CHIP 22K (1608)
R1086	1-216-837-91 s	RES, CHIP 22K (1608)
R1088	1-218-871-91 s	RES, CHIP 10K (1608)
R1089	1-208-943-81 s	RES, CHIP 220K (1005)
R1090	1-218-871-91 s	RES, CHIP 10K (1608)
R1091	1-208-943-81 s	RES, CHIP 220K (1005)
R1092	1-216-837-91 s	RES, CHIP 22K (1608)
R1094	1-208-887-81 s	RES, CHIP 1.0K (1005)
R1095	1-208-887-81 s	RES, CHIP 1.0K (1005)
R1096	1-218-871-91 s	RES, CHIP 10K (1608)
R1097	1-208-943-81 s	RES, CHIP 220K (1005)
R1101	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R1102	1-208-927-81 s	RES, CHIP 47K (1005)
R1103	1-218-989-81 s	RES, CHIP 1M
R1104	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R1105	1-208-927-81 s	RES, CHIP 47K (1005)
R1106	1-208-927-81 s	RES, CHIP 47K (1005)
R1107	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R1108	1-218-989-81 s	RES, CHIP 1M
R1109	1-218-989-81 s	RES, CHIP 1M
R1110	1-208-927-81 s	RES, CHIP 47K (1005)
R1111	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R1112	1-218-989-81 s	RES, CHIP 1M

(SY-363 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R1113	1-208-903-81 s	RES, CHIP 4.7K (1005)
R1114	1-208-903-81 s	RES, CHIP 4.7K (1005)
R1115	1-208-903-81 s	RES, CHIP 4.7K (1005)
R1116	1-208-903-81 s	RES, CHIP 4.7K (1005)
R1117	1-208-903-81 s	RES, CHIP 4.7K (1005)
R1118	1-208-903-81 s	RES, CHIP 4.7K (1005)
R1119	1-208-903-81 s	RES, CHIP 4.7K (1005)
R1120	1-208-903-81 s	RES, CHIP 4.7K (1005)
R1121	1-208-887-81 s	RES, CHIP 1.0K (1005)
R1122	1-208-887-81 s	RES, CHIP 1.0K (1005)
R1123	1-208-887-81 s	RES, CHIP 1.0K (1005)
R1124	1-208-887-81 s	RES, CHIP 1.0K (1005)
R1125	1-208-887-81 s	RES, CHIP 1.0K (1005)
R1126	1-208-887-81 s	RES, CHIP 1.0K (1005)
R1127	1-208-887-81 s	RES, CHIP 1.0K (1005)
R1128	1-208-887-81 s	RES, CHIP 1.0K (1005)
R1129	1-208-855-81 s	RES, CHIP 47 (1005)
R1130	1-208-855-81 s	RES, CHIP 47 (1005)
R1131	1-208-887-81 s	RES, CHIP 1.0K (1005)
R1132	1-208-887-81 s	RES, CHIP 1.0K (1005)
R1133	1-220-870-81 s	RES, CHIP 10 (1005)
R1134	1-208-919-81 s	RES, CHIP 22K (1005)
R1135	1-220-870-81 s	RES, CHIP 10 (1005)
R1136	1-208-919-81 s	RES, CHIP 22K (1005)
R1137	1-208-899-81 s	RES, CHIP 3.3K (1005)
R1138	1-208-879-81 s	RES, CHIP 470 (1005)
R1139	1-208-899-81 s	RES, CHIP 3.3K (1005)
R1140	1-208-879-81 s	RES, CHIP 470 (1005)
R1141	1-220-870-81 s	RES, CHIP 10 (1005)
R1142	1-220-870-81 s	RES, CHIP 10 (1005)
R1143	1-208-863-81 s	RES, CHIP 100 (1005)
R1144	1-208-895-81 s	RES, CHIP 2.2K (1005)
R1145	1-208-903-81 s	RES, CHIP 4.7K (1005)
R1146	1-208-911-81 s	RES, CHIP 10K (1005)
R1147	1-208-863-81 s	RES, CHIP 100 (1005)
R1148	1-208-895-81 s	RES, CHIP 2.2K (1005)
R1149	1-208-903-81 s	RES, CHIP 4.7K (1005)
R1150	1-208-911-81 s	RES, CHIP 10K (1005)
R1151	1-220-870-81 s	RES, CHIP 10 (1005)
R1152	1-220-870-81 s	RES, CHIP 10 (1005)
R1153	1-208-879-81 s	RES, CHIP 470 (1005)
R1154	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R1155	1-208-887-81 s	RES, CHIP 1.0K (1005)
R1156	1-208-911-81 s	RES, CHIP 10K (1005)
R1157	1-208-879-81 s	RES, CHIP 470 (1005)
R1158	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R1159	1-208-887-81 s	RES, CHIP 1.0K (1005)
R1160	1-208-911-81 s	RES, CHIP 10K (1005)
R1161	1-220-870-81 s	RES, CHIP 10 (1005)
R1162	1-220-870-81 s	RES, CHIP 10 (1005)
R1163	1-208-899-81 s	RES, CHIP 3.3K (1005)
R1164	1-208-879-81 s	RES, CHIP 470 (1005)
R1165	1-208-899-81 s	RES, CHIP 3.3K (1005)
R1166	1-208-879-81 s	RES, CHIP 470 (1005)
R1167	1-208-855-81 s	RES, CHIP 47 (1005)
R1168	1-208-855-81 s	RES, CHIP 47 (1005)
R1169	1-220-870-81 s	RES, CHIP 10 (1005)
R1170	1-220-870-81 s	RES, CHIP 10 (1005)
R1171	1-220-870-81 s	RES, CHIP 10 (1005)

(SY-363 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R1172	1-220-870-81	s RES, CHIP 10 (1005)
R1173	1-208-911-81	s RES, CHIP 10K (1005)
R1174	1-208-879-81	s RES, CHIP 470 (1005)
R1175	1-208-911-81	s RES, CHIP 10K (1005)
R1176	1-208-879-81	s RES, CHIP 470 (1005)
R1177	1-208-919-81	s RES, CHIP 22K (1005)
R1178	1-208-919-81	s RES, CHIP 22K (1005)
R1179	1-220-870-81	s RES, CHIP 10 (1005)
R1180	1-208-879-81	s RES, CHIP 470 (1005)
R1181	1-220-870-81	s RES, CHIP 10 (1005)
R1182	1-208-879-81	s RES, CHIP 470 (1005)
R1183	1-208-935-81	s RES, CHIP 100K (1005)
R1184	1-208-935-81	s RES, CHIP 100K (1005)
R1185	1-208-935-81	s RES, CHIP 100K (1005)
R1186	1-208-935-81	s RES, CHIP 100K (1005)
R1187	1-220-870-81	s RES, CHIP 10 (1005)
R1188	1-220-870-81	s RES, CHIP 10 (1005)
R1189	1-208-919-81	s RES, CHIP 22K (1005)
R1190	1-208-895-81	s RES, CHIP 2.2K (1005)
R1191	1-208-895-81	s RES, CHIP 2.2K (1005)
R1193	1-208-895-81	s RES, CHIP 2.2K (1005)
R1201	1-208-903-81	s RES, CHIP 4.7K (1005)
R1202	1-208-903-81	s RES, CHIP 4.7K (1005)
R1203	1-208-891-81	s RES, CHIP 1.5K (1005)
R1204	1-208-891-81	s RES, CHIP 1.5K (1005)
R1205	1-208-899-81	s RES, CHIP 3.3K (1005)
R1206	1-208-899-81	s RES, CHIP 3.3K (1005)
R1207	1-208-919-81	s RES, CHIP 22K (1005)
R1208	1-208-919-81	s RES, CHIP 22K (1005)
R1209	1-208-911-81	s RES, CHIP 10K (1005)
R1210	1-208-911-81	s RES, CHIP 10K (1005)
R1211	1-208-887-81	s RES, CHIP 1.0K (1005)
R1212	1-208-919-81	s RES, CHIP 22K (1005)
R1213	1-218-989-81	s RES, CHIP 1M
R1214	1-208-903-81	s RES, CHIP 4.7K (1005)
R1215	1-208-919-81	s RES, CHIP 22K (1005)
R1216	1-208-919-81	s RES, CHIP 22K (1005)
R1217	1-208-903-81	s RES, CHIP 4.7K (1005)
R1218	1-208-903-81	s RES, CHIP 4.7K (1005)
R1219	1-208-903-81	s RES, CHIP 4.7K (1005)
R1220	1-208-903-81	s RES, CHIP 4.7K (1005)
RB101	1-234-380-21	s RES, NETWORK 47K (1005X4)
RB102	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB103	1-234-381-21	s RES, NETWORK 100K (1005X4)
RB104	1-234-381-21	s RES, NETWORK 100K (1005X4)
RB105	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB106	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB107	1-234-381-21	s RES, NETWORK 100K (1005X4)
RB108	1-234-381-21	s RES, NETWORK 100K (1005X4)
RB109	1-234-381-21	s RES, NETWORK 100K (1005X4)
RB110	1-234-381-21	s RES, NETWORK 100K (1005X4)
RB111	1-234-381-21	s RES, NETWORK 100K (1005X4)
RB112	1-234-381-21	s RES, NETWORK 100K (1005X4)
RB113	1-234-381-21	s RES, NETWORK 100K (1005X4)
RB114	1-234-381-21	s RES, NETWORK 100K (1005X4)
RB115	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB116	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB117	1-234-371-21	s RES, NETWORK 47 (1005X4)

(SY-363 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
RB118	1-234-381-21	s RES, NETWORK 100K (1005X4)
RB119	1-234-381-21	s RES, NETWORK 100K (1005X4)
RB120	1-234-381-21	s RES, NETWORK 100K (1005X4)
RB121	1-234-381-21	s RES, NETWORK 100K (1005X4)
RB122	1-234-381-21	s RES, NETWORK 100K (1005X4)
RB123	1-234-381-21	s RES, NETWORK 100K (1005X4)
RB124	1-234-381-21	s RES, NETWORK 100K (1005X4)
RB125	1-234-381-21	s RES, NETWORK 100K (1005X4)
RB131	1-234-378-21	s RES, NETWORK 10K (1005X4)
RB132	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB133	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB134	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB135	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB136	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB137	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB138	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB139	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB140	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB141	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB142	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB144	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB145	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB146	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB147	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB148	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB149	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB150	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB151	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB152	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB153	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB154	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB155	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB156	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB157	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB158	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB159	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB160	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB161	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB162	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB163	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB164	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB165	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB166	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB167	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB168	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB169	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB170	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB171	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB172	1-234-378-21	s RES, NETWORK 10K (1005X4)
RB173	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB181	1-234-375-21	s RES, NETWORK 1K (1005X4)
RB182	1-234-375-21	s RES, NETWORK 1K (1005X4)
RB183	1-234-380-21	s RES, NETWORK 47K (1005X4)
RB184	1-234-380-21	s RES, NETWORK 47K (1005X4)
RB185	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB186	1-234-375-21	s RES, NETWORK 1K (1005X4)
RB188	1-234-380-21	s RES, NETWORK 47K (1005X4)
RB189	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB191	1-234-371-21	s RES, NETWORK 47 (1005X4)

(SY-363 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
RB192	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB193	1-234-378-21	s RES, NETWORK 10K (1005X4)
RB194	1-234-378-21	s RES, NETWORK 10K (1005X4)
RB201	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB202	1-234-378-21	s RES, NETWORK 10K (1005X4)
RB203	1-234-378-21	s RES, NETWORK 10K (1005X4)
RB204	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB205	1-234-378-21	s RES, NETWORK 10K (1005X4)
RB207	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB208	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB209	1-234-378-21	s RES, NETWORK 10K (1005X4)
RB501	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB502	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB504	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB505	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB506	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB507	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB508	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB509	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB510	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB511	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB512	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB513	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB514	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB515	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB516	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB517	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB518	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB521	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB522	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB531	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB532	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB561	1-234-378-21	s RES, NETWORK 10K (1005X4)
RB562	1-234-378-21	s RES, NETWORK 10K (1005X4)
RV501	1-225-793-21	s RES, ADJ, CERMET 20K
S101	1-692-270-41	s SWITCH, SLIDE
S102	1-786-725-21	s SWITCH, TACTILE
S201	1-692-270-41	s SWITCH, SLIDE
S502	1-771-796-21	s SWITCH, SLIDE
THP1	Δ 1-803-615-21	s THERMISTOR, POSITIVE
THP2	Δ 1-804-616-21	s THERMISTOR, POSITIVE
THP3	Δ 1-804-616-21	s THERMISTOR, POSITIVE
THP4	Δ 1-804-616-21	s THERMISTOR, POSITIVE
THP6	Δ 1-803-615-21	s THERMISTOR, POSITIVE
THP501	Δ 1-803-353-21	s THERMISTOR, POSITIVE
THP502	Δ 1-803-353-21	s THERMISTOR, POSITIVE
TP101	1-535-877-22	s CHIP, CHECKER
TP501	1-535-877-22	s CHIP, CHECKER
TP502	1-535-877-22	s CHIP, CHECKER
TP503	1-535-877-22	s CHIP, CHECKER
TP504	1-535-877-22	s CHIP, CHECKER
TP511	1-535-877-22	s CHIP, CHECKER
X101	1-795-561-21	s VIBRATOR, CERAMIC
X102	1-813-480-11	s OSCILLATOR, CRYSTAL
X501	1-813-253-12	s OSCILLATOR, CRYSTAL (VCXO) 5V

TG-265 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1707-916-A	s MOUNTED CIRCUIT BOARD, TG-265
C1	1-100-816-21	s CAP, ELECT 33MF (5.6X6.5)
C4	1-112-692-81	s CAP, CHIP CERAMIC 100PF CH 1005
C5	1-100-159-91	s CAP, CERAMIC 22MF B (SMD) 3216
C6	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C7	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C8	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C9	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C10	1-114-548-11	s CAP, NIOBIUM ELECT 22UF
C13	1-164-845-81	s CAP, CHIP CERAMIC 5PF CH 1005
C14	1-114-549-11	s CAP, NIOBIUM ELECT 47UF
C15	1-114-549-11	s CAP, NIOBIUM ELECT 47UF
C17	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C18	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C20	1-164-874-81	s CAP, CHIP CERAMIC 100PF CH 1005
C21	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C22	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C23	1-100-159-91	s CAP, CERAMIC 22MF B (SMD) 3216
C24	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C25	1-127-956-21	s CAP, CHIP FILM 0.1MF (3225)
C27	1-164-874-81	s CAP, CHIP CERAMIC 100PF CH 1005
C28	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C29	1-114-549-11	s CAP, NIOBIUM ELECT 47UF
C30	1-114-549-11	s CAP, NIOBIUM ELECT 47UF
C31	1-100-567-81	s CAP, CHIP CERAMIC 0.01MF B 1005
C32	1-100-567-81	s CAP, CHIP CERAMIC 0.01MF B 1005
C34	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C35	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C36	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C37	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C38	1-135-960-91	s CAP, CHIP CERAMIC 10MF B (3225)
C39	1-127-956-21	s CAP, CHIP FILM 0.1MF (3225)
C40	1-127-956-21	s CAP, CHIP FILM 0.1MF (3225)
C41	1-164-874-81	s CAP, CHIP CERAMIC 100PF CH 1005
C42	1-164-874-81	s CAP, CHIP CERAMIC 100PF CH 1005
C45	1-112-692-81	s CAP, CHIP CERAMIC 100PF CH 1005
C46	1-100-159-91	s CAP, CERAMIC 22MF B (SMD) 3216
C47	1-100-165-21	s CAP, ELECT 47MF (8X7)
C48	1-114-549-11	s CAP, NIOBIUM ELECT 47UF
C49	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C50	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C51	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C52	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C53	1-114-548-11	s CAP, NIOBIUM ELECT 22UF
C54	1-115-339-91	s CAP, CERAMIC 0.1MF B (2012)
C55	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C58	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C59	1-164-845-81	s CAP, CHIP CERAMIC 5PF CH 1005
C60	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C61	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C62	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C63	1-100-159-91	s CAP, CERAMIC 22MF B (SMD) 3216
C64	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C66	1-115-339-91	s CAP, CERAMIC 0.1MF B (2012)
C68	1-165-629-91	s CAP, CERAMIC 1000000PF B (3225)
C69	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C70	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C71	1-100-159-91	s CAP, CERAMIC 22MF B (SMD) 3216

(TG-265 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C72	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C74	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C75	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C76	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C77	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C79	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C80	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C81	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C82	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C83	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C86	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C87	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C88	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C89	1-126-398-21	s	CAP, CHIP ELECT 4.7MF (4X5.7)
C90	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C91	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C92	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C93	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C94	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C95	1-114-548-11	s	CAP, NIOBIUM ELECT 22UF
C96	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C99	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C100	1-126-398-21	s	CAP, CHIP ELECT 4.7MF (4X5.7)
C101	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C102	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C104	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C106	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C107	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C108	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C109	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C111	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C112	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C113	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C115	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C116	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C117	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C201	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C202	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C203	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C205	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C206	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C207	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C208	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C209	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C210	1-114-548-11	s	CAP, NIOBIUM ELECT 22UF
C211	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C212	1-127-956-21	s	CAP, CHIP FILM 0.1MF (3225)
C213	1-127-956-21	s	CAP, CHIP FILM 0.1MF (3225)
C214	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C215	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C216	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C217	1-114-549-11	s	CAP, NIOBIUM ELECT 47UF
C218	1-165-872-21	s	CAP, ELECT 47MF (5.0X6.5)
C219	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C220	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C221	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C222	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C223	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C224	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(TG-265 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C225	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C226	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C228	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C229	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C230	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C231	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C232	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C235	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C236	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C237	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C238	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C239	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C240	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C241	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C242	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C243	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C244	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C245	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C246	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C247	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C248	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C249	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C250	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C251	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C252	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C253	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C254	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C255	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C256	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C257	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C258	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C259	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C260	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C261	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C262	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C263	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C264	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C265	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C266	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C267	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C268	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C269	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C270	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C271	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C272	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C274	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C275	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C276	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C277	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C278	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C279	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C280	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C284	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
CN1	1-774-261-31	s	CONNECTOR, FFC/FPC(ZIF) AN 24P
CN2	1-794-142-31	s	CONNECTOR, FFC/FPC(ZIF) AN 36P
CN3	1-778-535-31	s	CONNECTOR, FFC/FPC(ZIF) AN 45P
CN201	1-770-622-21	s	PIN, CONNECTOR 5P
CN202	1-784-254-21	s	CONNECTOR 10P

(TG-265 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
D1	8-719-083-60	s DI UDZSUSTE-174.7B
D2	8-719-083-60	s DI UDZSUSTE-174.7B
D3	8-719-210-46	s DIODE EC10QS-06-TE12L
D4	8-719-083-83	s DI UDZSUSTE-1715B
D5	8-719-083-60	s DI UDZSUSTE-174.7B
D6	6-502-122-01	s DI MA3J1430GLS0
D7	6-502-122-01	s DI MA3J1430GLS0
D201	8-719-989-01	s DIODE DA221-TL
D202	8-719-989-01	s DIODE DA221-TL
E1	1-535-877-22	s CHIP, CHECKER
FB201	1-414-864-21	s FERRITE, EMI (SMD) (1608)
FB202	1-414-864-21	s FERRITE, EMI (SMD) (1608)
FB203	1-414-864-21	s FERRITE, EMI (SMD) (1608)
FB204	1-414-864-21	s FERRITE, EMI (SMD) (1608)
FB205	1-414-864-21	s FERRITE, EMI (SMD) (1608)
FB206	1-414-864-21	s FERRITE, EMI (SMD) (1608)
FB207	1-469-108-21	s FERRITE, EMI (SMD) (1608)
IC1	8-753-261-02	s IC CXA3648AR-T4
IC3	8-759-327-01	s IC NJM062V (TE2)
IC5	6-704-976-01	s IC ADR381ARTZ-REEL7
IC6	8-759-327-01	s IC NJM062V (TE2)
IC7	6-706-863-01	s IC LMH6732MFX/NOPB
IC8	8-753-261-02	s IC CXA3648AR-T4
IC10	8-759-327-01	s IC NJM062V (TE2)
IC12	6-711-852-01	s IC LTC1844ES5-BYP
IC13	8-759-327-01	s IC NJM062V (TE2)
IC14	6-704-099-01	s IC TC7WZ08FK (TE85R)
IC15	6-706-863-01	s IC LMH6732MFX/NOPB
IC16	6-707-879-01	s IC TC74VHC541FT (EKJ)
IC18	8-753-261-02	s IC CXA3648AR-T4
IC20	8-759-672-76	s IC AK9813BF-E2
IC21	6-706-863-01	s IC LMH6732MFX/NOPB
IC22	6-707-853-01	s IC TC74LCX541FT (EKJ)
IC23	8-759-672-76	s IC AK9813BF-E2
IC201	6-709-765-01	s IC EPCS4SI8N (15)
IC205	6-706-482-01	s IC TC7SH00FU (T5RSOYJF)
IC206	6-704-976-01	s IC ADR381ARTZ-REEL7
IC207	6-706-482-01	s IC TC7SH00FU (T5RSOYJF)
IC208	6-709-647-01	s IC TLC2932AIPWR
IC209	8-759-327-01	s IC NJM062V (TE2)
IC210	8-759-669-66	s IC TLC272CPWR-12
IC211	6-706-487-01	s IC TC7SH08FU (T5RSOYJF)
IC213	6-706-482-01	s IC TC7SH00FU (T5RSOYJF)
IC214	6-710-020-01	s IC CAT24C08WI-GT3
IC215	6-711-852-01	s IC LTC1844ES5-BYP
IC216	8-759-592-49	s IC TC7SZ125FU (TE85R)
IC217	8-759-592-49	s IC TC7SZ125FU (TE85R)
IC219	6-706-487-01	s IC TC7SH08FU (T5RSOYJF)
IC220	6-704-571-01	s IC TLC7703IPWR
L1	1-414-392-41	s INDUCTOR (SMD) 1.0UH
L201	1-414-392-41	s INDUCTOR (SMD) 1.0UH
L202	1-414-392-41	s INDUCTOR (SMD) 1.0UH
L203	1-414-392-41	s INDUCTOR (SMD) 1.0UH
Q1	6-550-631-01	s TRANSISTOR 2SA1797-T100-Q
Q2	6-550-632-01	s TRANSISTOR 2SC4672-T100-Q
Q3	6-550-631-01	s TRANSISTOR 2SA1797-T100-Q
Q4	6-550-631-01	s TRANSISTOR 2SA1797-T100-Q

(TG-265 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
Q5	8-729-144-81	s TRANSISTOR 2SC4176T1B33B34B35
Q6	8-729-140-86	s TRANSISTOR 2SA1610-T1Y34
Q7	8-729-107-04	s TRANSISTOR 2SB1115-T1YL
Q8	8-729-809-73	s TRANSISTOR 2SK536-TB
Q201	6-550-631-01	s TRANSISTOR 2SA1797-T100-Q
Q202	6-550-631-01	s TRANSISTOR 2SA1797-T100-Q
Q203	6-551-659-01	s TRANSISTOR SI3443BDV-T1-E3
Q204	6-551-659-01	s TRANSISTOR SI3443BDV-T1-E3
Q205	8-729-928-25	s TRANSISTOR 2SA1774TL-QR
Q206	8-729-928-25	s TRANSISTOR 2SA1774TL-QR
R1	1-208-863-81	s RES, CHIP 100 (1005)
R2	1-208-863-81	s RES, CHIP 100 (1005)
R3	1-208-863-81	s RES, CHIP 100 (1005)
R4	1-208-863-81	s RES, CHIP 100 (1005)
R5	1-208-943-81	s RES, CHIP 220K (1005)
R6	1-208-879-81	s RES, CHIP 470 (1005)
R7	1-218-990-81	s CONDUCTOR, CHIP (1005)
R15	1-208-927-81	s RES, CHIP 47K (1005)
R16	1-208-927-81	s RES, CHIP 47K (1005)
R17	1-208-911-81	s RES, CHIP 10K (1005)
R19	1-208-927-81	s RES, CHIP 47K (1005)
R20	1-208-927-81	s RES, CHIP 47K (1005)
R22	1-208-887-81	s RES, CHIP 1.0K (1005)
R23	1-208-863-81	s RES, CHIP 100 (1005)
R24	1-208-863-81	s RES, CHIP 100 (1005)
R25	1-208-887-81	s RES, CHIP 1.0K (1005)
R26	1-208-883-81	s RES, CHIP 680 (1005)
R27	1-208-871-81	s RES, CHIP 220 (1005)
R28	1-208-927-81	s RES, CHIP 47K (1005)
R29	1-208-879-81	s RES, CHIP 470 (1005)
R30	1-208-867-81	s RES, CHIP 150 (1005)
R32	1-208-911-81	s RES, CHIP 10K (1005)
R33	1-208-911-81	s RES, CHIP 10K (1005)
R34	1-208-891-81	s RES, CHIP 1.5K (1005)
R35	1-208-919-81	s RES, CHIP 22K (1005)
R36	1-208-903-81	s RES, CHIP 4.7K (1005)
R37	1-208-927-81	s RES, CHIP 47K (1005)
R38	1-208-927-81	s RES, CHIP 47K (1005)
R39	1-208-943-81	s RES, CHIP 220K (1005)
R40	1-208-863-81	s RES, CHIP 100 (1005)
R41	1-208-863-81	s RES, CHIP 100 (1005)
R42	1-208-879-81	s RES, CHIP 470 (1005)
R43	1-218-990-81	s CONDUCTOR, CHIP (1005)
R44	1-208-911-81	s RES, CHIP 10K (1005)
R48	1-208-911-81	s RES, CHIP 10K (1005)
R49	1-208-895-81	s RES, CHIP 2.2K (1005)
R52	1-208-919-81	s RES, CHIP 22K (1005)
R53	1-208-911-81	s RES, CHIP 10K (1005)
R55	1-208-911-81	s RES, CHIP 10K (1005)
R57	1-208-911-81	s RES, CHIP 10K (1005)
R58	1-208-911-81	s RES, CHIP 10K (1005)
R59	1-208-911-81	s RES, CHIP 10K (1005)
R62	1-208-919-81	s RES, CHIP 22K (1005)
R63	1-208-919-81	s RES, CHIP 22K (1005)
R64	1-208-919-81	s RES, CHIP 22K (1005)
R65	1-208-887-81	s RES, CHIP 1.0K (1005)
R66	1-208-887-81	s RES, CHIP 1.0K (1005)
R67	1-208-883-81	s RES, CHIP 680 (1005)
R68	1-208-871-81	s RES, CHIP 220 (1005)

(TG-265 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R69	1-208-927-81	s RES, CHIP 47K (1005)
R70	1-208-879-81	s RES, CHIP 470 (1005)
R71	1-208-867-81	s RES, CHIP 150 (1005)
R73	1-208-943-81	s RES, CHIP 220K (1005)
R74	1-208-895-81	s RES, CHIP 2.2K (1005)
R75	1-208-911-81	s RES, CHIP 10K (1005)
R76	1-208-879-81	s RES, CHIP 470 (1005)
R77	1-208-935-81	s RES, CHIP 100K (1005)
R78	1-218-990-81	s CONDUCTOR, CHIP (1005)
R79	1-208-895-81	s RES, CHIP 2.2K (1005)
R80	1-220-878-81	s RES, CHIP 22 (1005)
R81	1-220-870-81	s RES, CHIP 10 (1005)
R82	1-220-874-81	s RES, CHIP 15 (1005)
R83	1-220-874-81	s RES, CHIP 15 (1005)
R86	1-220-870-81	s RES, CHIP 10 (1005)
R94	1-208-887-81	s RES, CHIP 1.0K (1005)
R95	1-208-887-81	s RES, CHIP 1.0K (1005)
R96	1-208-883-81	s RES, CHIP 680 (1005)
R97	1-208-871-81	s RES, CHIP 220 (1005)
R98	1-208-927-81	s RES, CHIP 47K (1005)
R99	1-208-879-81	s RES, CHIP 470 (1005)
R100	1-208-867-81	s RES, CHIP 150 (1005)
R102	1-220-878-81	s RES, CHIP 22 (1005)
R103	1-208-911-81	s RES, CHIP 10K (1005)
R104	1-208-873-81	s RES, CHIP 270 (1005)
R105	1-208-873-81	s RES, CHIP 270 (1005)
R106	1-208-873-81	s RES, CHIP 270 (1005)
R107	1-208-883-81	s RES, CHIP 680 (1005)
R108	1-208-883-81	s RES, CHIP 680 (1005)
R109	1-208-883-81	s RES, CHIP 680 (1005)
R110	1-208-899-81	s RES, CHIP 3.3K (1005)
R206	1-208-911-81	s RES, CHIP 10K (1005)
R207	1-208-911-81	s RES, CHIP 10K (1005)
R208	1-208-911-81	s RES, CHIP 10K (1005)
R209	1-208-871-81	s RES, CHIP 220 (1005)
R210	1-208-911-81	s RES, CHIP 10K (1005)
R212	1-208-919-81	s RES, CHIP 22K (1005)
R213	1-208-911-81	s RES, CHIP 10K (1005)
R215	1-208-919-81	s RES, CHIP 22K (1005)
R216	1-208-863-81	s RES, CHIP 100 (1005)
R217	1-208-863-81	s RES, CHIP 100 (1005)
R218	1-208-935-81	s RES, CHIP 100K (1005)
R219	1-208-935-81	s RES, CHIP 100K (1005)
R221	1-208-903-81	s RES, CHIP 4.7K (1005)
R222	1-208-903-81	s RES, CHIP 4.7K (1005)
R223	1-208-887-81	s RES, CHIP 1.0K (1005)
R224	1-218-990-81	s CONDUCTOR, CHIP (1005)
R225	1-208-891-81	s RES, CHIP 1.5K (1005)
R226	1-218-990-81	s CONDUCTOR, CHIP (1005)
R227	1-244-161-81	s RES, CHIP 2.2 (1005)
R228	1-208-911-81	s RES, CHIP 10K (1005)
R229	1-208-911-81	s RES, CHIP 10K (1005)
R230	1-208-907-81	s RES, CHIP 6.8K (1005)
R231	1-208-895-81	s RES, CHIP 2.2K (1005)
R232	1-208-919-81	s RES, CHIP 22K (1005)
R233	1-208-863-81	s RES, CHIP 100 (1005)
R234	1-208-863-81	s RES, CHIP 100 (1005)
R235	1-208-863-81	s RES, CHIP 100 (1005)
R236	1-243-975-81	s RES, CHIP 4.7M (1005)

(TG-265 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R237	1-208-891-81	s RES, CHIP 1.5K (1005)
R238	1-208-863-81	s RES, CHIP 100 (1005)
R239	1-208-907-81	s RES, CHIP 6.8K (1005)
R240	1-208-883-81	s RES, CHIP 680 (1005)
R241	1-208-911-81	s RES, CHIP 10K (1005)
R242	1-208-911-81	s RES, CHIP 10K (1005)
R243	1-208-911-81	s RES, CHIP 10K (1005)
R244	1-208-911-81	s RES, CHIP 10K (1005)
R245	1-208-919-81	s RES, CHIP 22K (1005)
R250	1-208-863-81	s RES, CHIP 100 (1005)
R251	1-208-863-81	s RES, CHIP 100 (1005)
R253	1-208-863-81	s RES, CHIP 100 (1005)
R254	1-208-863-81	s RES, CHIP 100 (1005)
R256	1-208-911-81	s RES, CHIP 10K (1005)
R260	1-208-911-81	s RES, CHIP 10K (1005)
R261	1-208-911-81	s RES, CHIP 10K (1005)
R262	1-208-927-81	s RES, CHIP 47K (1005)
R265	1-208-911-81	s RES, CHIP 10K (1005)
R267	1-208-911-81	s RES, CHIP 10K (1005)
R268	1-220-870-81	s RES, CHIP 10 (1005)
R281	1-208-863-81	s RES, CHIP 100 (1005)
R282	1-208-863-81	s RES, CHIP 100 (1005)
R283	1-218-990-81	s CONDUCTOR, CHIP (1005)
R284	1-208-863-81	s RES, CHIP 100 (1005)
R285	1-208-863-81	s RES, CHIP 100 (1005)
R289	1-218-990-81	s CONDUCTOR, CHIP (1005)
R290	1-218-990-81	s CONDUCTOR, CHIP (1005)
R291	1-218-990-81	s CONDUCTOR, CHIP (1005)
R292	1-218-990-81	s CONDUCTOR, CHIP (1005)
R295	1-208-935-81	s RES, CHIP 100K (1005)
R298	1-218-990-81	s CONDUCTOR, CHIP (1005)
R304	1-208-863-81	s RES, CHIP 100 (1005)
R305	1-208-863-81	s RES, CHIP 100 (1005)
R306	1-208-863-81	s RES, CHIP 100 (1005)
R307	1-218-990-81	s CONDUCTOR, CHIP (1005)
R308	1-218-929-81	s RES, CHIP 10
R309	1-208-863-81	s RES, CHIP 100 (1005)
R310	1-220-870-81	s RES, CHIP 10 (1005)
R311	1-220-870-81	s RES, CHIP 10 (1005)
R312	1-218-990-81	s CONDUCTOR, CHIP (1005)
R313	1-218-990-81	s CONDUCTOR, CHIP (1005)
R314	1-218-990-81	s CONDUCTOR, CHIP (1005)
R315	1-218-990-81	s CONDUCTOR, CHIP (1005)
R316	1-218-990-81	s CONDUCTOR, CHIP (1005)
R317	1-218-990-81	s CONDUCTOR, CHIP (1005)
R318	1-208-863-81	s RES, CHIP 100 (1005)
R319	1-208-863-81	s RES, CHIP 100 (1005)
R320	1-208-911-81	s RES, CHIP 10K (1005)
R321	1-208-935-81	s RES, CHIP 100K (1005)
R322	1-208-935-81	s RES, CHIP 100K (1005)
R323	1-208-919-81	s RES, CHIP 22K (1005)
R324	1-208-911-81	s RES, CHIP 10K (1005)
R325	1-208-863-81	s RES, CHIP 100 (1005)
R326	1-218-990-81	s CONDUCTOR, CHIP (1005)
R327	1-218-929-81	s RES, CHIP 10
R328	1-208-863-81	s RES, CHIP 100 (1005)
R330	1-218-990-81	s CONDUCTOR, CHIP (1005)
R331	1-208-863-81	s RES, CHIP 100 (1005)
R332	1-208-863-81	s RES, CHIP 100 (1005)

(TG-265 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
RB1	1-234-370-21	s RES, NETWORK 22 (1005X4)
RB2	1-234-370-21	s RES, NETWORK 22 (1005X4)
RB3	1-234-370-21	s RES, NETWORK 22 (1005X4)
X201	1-795-671-12	s OSCILLATOR, CRYSTAL (VCXO)3.3V
X202	1-795-670-12	s OSCILLATOR, CRYSTAL (VCXO)3.3V

TX-126 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1707-920-A	s MOUNTED CIRCUIT BOARD, TX-126
C1	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C2	1-135-960-91	s CAP, CHIP CERAMIC 10MF B(3225)
C3	1-164-862-81	s CAP, CHIP CERAMIC 33PF CH 1005
C4	1-164-862-81	s CAP, CHIP CERAMIC 33PF CH 1005
C6	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C7	1-164-936-81	s CAP, CHIP CERAMIC 680PF B 1005
C8	1-112-692-81	s CAP,CHIP CERAMIC1000PF CH 1005
C9	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C10	1-164-862-81	s CAP, CHIP CERAMIC 33PF CH 1005
C11	1-164-936-81	s CAP, CHIP CERAMIC 680PF B 1005
C12	1-164-850-81	s CAP, CHIP CERAMIC 10PF CH 1005
C13	1-135-960-91	s CAP, CHIP CERAMIC 10MF B(3225)
C14	1-135-960-91	s CAP, CHIP CERAMIC 10MF B(3225)
C15	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C16	1-164-845-81	s CAP, CHIP CERAMIC 5PF CH 1005
C17	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C18	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C19	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C20	1-100-581-81	s CAP,CHIP CERAMIC0.0047MF B1005
C21	1-164-939-81	s CAP, CHIP CERAMIC 2200PF B 1005
C22	1-135-960-91	s CAP, CHIP CERAMIC 10MF B(3225)
C23	1-119-923-81	s CAP, CERAMIC 0.047MF B 1005
C24	1-164-934-81	s CAP, CHIP CERAMIC 330PF B 1005
C25	1-112-298-91	o CAP, CERAMIC 1MF B (1608)
C26	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C27	1-164-870-81	s CAP, CHIP CERAMIC 68PF CH 1005
C28	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C31	1-164-874-81	s CAP,CHIP CERAMIC 100PF CH 1005
C33	1-164-866-81	s CAP, CHIP CERAMIC 47PF CH 1005
C34	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C35	1-135-960-91	s CAP, CHIP CERAMIC 10MF B(3225)
C36	1-164-940-81	s CAP,CHIP CERAMIC 3300PF B 1005
C37	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C38	1-100-670-91	s CAP, CERAMIC 4.7MF C (2012)
C39	1-100-670-91	s CAP, CERAMIC 4.7MF C (2012)
C40	1-164-845-81	s CAP, CHIP CERAMIC 5PF CH 1005
C41	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C42	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C43	1-112-021-91	s CAP, CERAMIC 2.2MF C (1608)
C44	1-135-960-91	s CAP, CHIP CERAMIC 10MF B(3225)
C45	1-135-960-91	s CAP, CHIP CERAMIC 10MF B(3225)
C46	1-164-934-81	s CAP, CHIP CERAMIC 330PF B 1005
C47	1-119-923-81	s CAP, CERAMIC 0.047MF B 1005
C48	1-164-939-81	s CAP, CHIP CERAMIC 2200PF B 1005
C49	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C50	1-100-581-81	s CAP,CHIP CERAMIC0.0047MF B1005
C51	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C52	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C53	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C54	1-135-960-91	s CAP, CHIP CERAMIC 10MF B(3225)
C55	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C56	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C57	1-164-874-81	s CAP,CHIP CERAMIC 100PF CH 1005
C59	1-164-935-81	s CAP, CHIP CERAMIC 470PF B 1005
C61	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C62	1-112-298-91	o CAP, CERAMIC 1MF B (1608)
C64	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005

(TX-126 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C65	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C67	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C68	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C69	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C70	1-114-386-11	s	CAP, NIOBIUM ELECT 100MF 105
C71	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C72	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C73	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C74	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C75	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C76	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C77	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C78	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C79	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C80	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C82	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C83	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C84	1-164-940-81	s	CAP,CHIP CERAMIC 3300PF B 1005
C85	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C86	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C87	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C88	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C89	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C90	1-100-670-91	s	CAP, CERAMIC 4.7MF C (2012)
C91	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C92	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C93	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C94	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C95	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C96	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C97	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C98	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C99	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C100	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C101	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C102	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C103	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C201	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C202	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C203	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C204	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C205	1-127-956-21	s	CAP, CHIP FILM 0.1MF (3225)
C206	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C207	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C208	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C209	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C210	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C211	1-127-956-21	s	CAP, CHIP FILM 0.1MF (3225)
C212	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C213	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C214	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C215	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C216	1-112-015-91	s	CAP, CHIP CERAMIC 47MF B 3225
C217	1-112-015-91	s	CAP, CHIP CERAMIC 47MF B 3225
C218	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C219	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C220	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C221	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C222	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005

(TX-126 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C223	1-127-956-21	s	CAP, CHIP FILM 0.1MF (3225)
C224	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C225	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C226	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C227	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C228	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C229	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C230	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C231	1-112-015-91	s	CAP, CHIP CERAMIC 47MF B 3225
C232	1-112-015-91	s	CAP, CHIP CERAMIC 47MF B 3225
C233	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C234	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C235	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C236	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C237	1-127-956-21	s	CAP, CHIP FILM 0.1MF (3225)
C238	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C239	1-127-956-21	s	CAP, CHIP FILM 0.1MF (3225)
C240	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C241	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C242	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C243	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C244	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C245	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C246	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C247	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C249	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C250	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C251	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C301	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C302	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C303	1-112-021-91	s	CAP, CERAMIC 2.2MF C (1608)
C304	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C305	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C306	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C307	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C308	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C309	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C310	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C311	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C312	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C313	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C314	1-112-300-91	s	CAP, CERAMIC 4.7MF B (2012)
C316	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C318	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C319	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C320	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C321	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C323	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C324	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C325	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C326	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C327	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C328	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C329	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C330	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C331	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C332	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C333	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C334	1-164-848-81	s	CAP, CHIP CERAMIC 8PF CH 1005

(TX-126 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C547	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C548	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C549	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C552	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C553	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C554	1-164-842-81	s	CAP,CHIP CERAMIC 2.0PF CK 1005
C555	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C556	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C557	1-112-021-91	s	CAP, CERAMIC 2.2MF C (1608)
C559	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C560	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C561	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C562	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C601	1-164-878-81	s	CAP,CHIP CERAMIC 150PF CH 1005
C602	1-112-021-91	s	CAP, CERAMIC 2.2MF C (1608)
C603	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C604	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C605	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C606	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C607	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C608	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C609	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C610	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C611	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C612	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C613	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C614	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C615	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C616	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C617	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C618	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C619	1-125-891-91	s	CAP, CHIP CERAMIC0.47MF B 1608
C620	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C621	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C622	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C623	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C624	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C625	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C626	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C627	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C628	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C629	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C630	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C631	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C632	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C633	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C634	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C635	1-125-891-91	s	CAP, CHIP CERAMIC0.47MF B 1608
C636	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C637	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C638	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C639	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C640	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C641	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C642	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C643	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C644	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C645	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C646	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(TX-126 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C647	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C648	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C649	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C650	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C651	1-125-891-91	s	CAP, CHIP CERAMIC0.47MF B 1608
C652	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C653	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C654	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C655	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C656	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C657	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C658	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C659	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C660	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C661	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C662	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C663	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C664	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C665	1-164-846-81	s	CAP, CHIP CERAMIC 6PF CH 1005
C666	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C667	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C668	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C669	1-164-854-81	s	CAP, CHIP CERAMIC 15PF CH 1005
C670	1-164-870-81	s	CAP, CHIP CERAMIC 68PF CH 1005
C671	1-164-846-81	s	CAP, CHIP CERAMIC 6PF CH 1005
C672	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C673	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C674	1-164-870-81	s	CAP, CHIP CERAMIC 68PF CH 1005
C675	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C676	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C677	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C678	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C679	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C680	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C681	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C682	1-164-840-81	s	CAP, CHIP CERAMIC 1PF CK 1005
C683	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C684	1-164-854-81	s	CAP, CHIP CERAMIC 15PF CH 1005
C685	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C686	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C687	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C688	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C689	1-164-870-81	s	CAP, CHIP CERAMIC 68PF CH 1005
C690	1-164-854-81	s	CAP, CHIP CERAMIC 15PF CH 1005
C691	1-164-846-81	s	CAP, CHIP CERAMIC 6PF CH 1005
C692	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C693	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C694	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C695	1-164-870-81	s	CAP, CHIP CERAMIC 68PF CH 1005
C696	1-164-854-81	s	CAP, CHIP CERAMIC 15PF CH 1005
C697	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C698	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C699	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C700	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C701	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C702	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C703	1-164-840-81	s	CAP, CHIP CERAMIC 1PF CK 1005
C704	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C705	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(TX-126 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C706	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C707	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C708	1-112-021-91 s	CAP, CERAMIC 2.2MF C (1608)
C709	1-135-960-91 s	CAP, CHIP CERAMIC 10MF B(3225)
C710	1-135-960-91 s	CAP, CHIP CERAMIC 10MF B(3225)
C711	1-164-840-81 s	CAP, CHIP CERAMIC 1PF CK 1005
C712	1-164-840-81 s	CAP, CHIP CERAMIC 1PF CK 1005
C713	1-164-840-81 s	CAP, CHIP CERAMIC 1PF CK 1005
C714	1-164-840-81 s	CAP, CHIP CERAMIC 1PF CK 1005
C715	1-164-840-81 s	CAP, CHIP CERAMIC 1PF CK 1005
C716	1-164-840-81 s	CAP, CHIP CERAMIC 1PF CK 1005
C717	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C718	1-100-581-81 s	CAP,CHIP CERAMIC0.0047MF B1005
C719	1-164-858-81 s	CAP, CHIP CERAMIC 22PF CH 1005
C720	1-164-845-81 s	CAP, CHIP CERAMIC 5PF CH 1005
C721	1-164-844-81 s	CAP, CHIP CERAMIC 4PF CH 1005
C722	1-164-844-81 s	CAP, CHIP CERAMIC 4PF CH 1005
C723	1-164-845-81 s	CAP, CHIP CERAMIC 5PF CH 1005
C724	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C725	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C726	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C729	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C738	1-164-858-81 s	CAP, CHIP CERAMIC 22PF CH 1005
C801	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C802	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C803	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C804	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C805	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C806	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C807	1-100-055-21 s	CAP, CHIP CERAMIC 22MF B 3225
C809	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C811	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C812	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C813	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C814	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C815	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C816	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C817	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
CN1	1-820-786-11 s	CONNECTOR, FFC/FPC (ZIF) 33P
CN2	1-820-786-11 s	CONNECTOR, FFC/FPC (ZIF) 33P
CN3	1-779-806-21 s	CONNECTOR 8P
CN601	1-750-880-11 s	RECEPTACLE, COAXIAL CONNECTOR
D1	6-500-695-01 s	DI UDZSUSTE-172.7B
D2	6-500-695-01 s	DI UDZSUSTE-172.7B
D3	8-719-989-01 s	DIODE DA221-TL
D4	8-719-041-40 s	DIODE KV1470TL00-G
D5	8-719-069-28 s	DIODE 1SS400TE-61
D6	8-719-069-28 s	DIODE 1SS400TE-61
D7	8-719-069-99 s	DIODE 1SS375-TL-E
D8	8-719-069-99 s	DIODE 1SS375-TL-E
D9	8-719-069-99 s	DIODE 1SS375-TL-E
D201	8-719-083-60 s	DI UDZSUSTE-174.7B
D202	8-719-991-01 s	DIODE DAP222-TL
D203	8-719-083-60 s	DI UDZSUSTE-174.7B
D204	8-719-083-60 s	DI UDZSUSTE-174.7B
D205	8-719-074-31 s	DIODE CL-196YG-CD-T
D206	8-719-083-60 s	DI UDZSUSTE-174.7B
D207	6-501-124-01 s	DIODE RSX101VA-30TR

(TX-126 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
D301	8-719-083-90 s	DIODE HVU363ATRU
D401	8-719-083-90 s	DIODE HVU363ATRU
D501	8-719-083-90 s	DIODE HVU363ATRU
D601	8-719-069-28 s	DIODE 1SS400TE-61
D602	8-719-069-28 s	DIODE 1SS400TE-61
D603	8-719-082-45 s	DIODE RB715W-TL
D604	8-719-082-45 s	DIODE RB715W-TL
D605	8-719-989-01 s	DIODE DA221-TL
D801	8-719-989-01 s	DIODE DA221-TL
E2	1-535-877-22 s	CHIP, CHECKER
E301	1-535-877-22 s	CHIP, CHECKER
E302	1-535-877-22 s	CHIP, CHECKER
FB201	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB202	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB301	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB401	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB501	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB603	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB604	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB605	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB607	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB608	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB609	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB611	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB612	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB613	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FL1	1-200-079-11 s	FILTER, BAND PASS (1.4MHZ)
FL2	1-200-078-11 s	FILTER, BAND PASS (1.0MHZ)
FL301	1-200-082-11 s	FILTER, BAND PASS (106MHZ)
FL401	1-200-081-11 s	FILTER, BAND PASS (96MHZ)
FL501	1-200-080-11 s	FILTER, BAND PASS (86MHZ)
FL601	1-200-090-11 s	FILTER, MULTIPLEX
IC1	6-706-492-01 s	IC TC7SHU04FU(T5RSOJF)
IC3	8-759-698-31 s	IC TC7WH74FK(TE85R)
IC4	8-759-278-58 s	IC NJM4558V-TE2
IC5	8-759-278-58 s	IC NJM4558V-TE2
IC6	6-706-863-01 s	IC LMH6732MFX/NOPB
IC7	8-759-337-40 s	IC NJM2904V(TE2)
IC8	8-759-083-42 s	IC TC4W53FU(TE12R)
IC9	8-759-278-58 s	IC NJM4558V-TE2
IC10	8-759-144-73 s	IC UPC393G2-E2
IC11	8-759-278-58 s	IC NJM4558V-TE2
IC13	6-713-713-01 s	IC LA1235M-TLM-E
IC14	6-706-487-01 s	IC TC7SH08FU(T5RSOYJF)
IC15	8-759-422-21 s	IC NJM4580V(TE2)
IC16	6-706-487-01 s	IC TC7SH08FU(T5RSOYJF)
IC201	8-759-278-58 s	IC NJM4558V-TE2
IC202	6-704-976-01 s	IC ADR381ARTZ-REEL7
IC203	8-759-278-58 s	IC NJM4558V-TE2
IC204	8-759-278-58 s	IC NJM4558V-TE2
IC205	8-759-338-95 s	IC NJM2903V(TE2)
IC301	6-713-951-01 s	IC LMH6624MFX
IC302	8-753-321-15 s	IC CXA3793R-T4
IC303	8-753-321-14 s	IC CXA3792Q-T4
IC401	6-713-951-01 s	IC LMH6624MFX
IC402	8-753-321-15 s	IC CXA3793R-T4
IC403	8-753-321-14 s	IC CXA3792Q-T4

(TX-126 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC501	6-713-951-01	s IC	LMH6624MFX
IC502	8-753-321-15	s IC	CXA3793R-T4
IC503	8-753-321-14	s IC	CXA3792Q-T4
IC601	6-713-951-01	s IC	LMH6624MFX
IC602	6-706-863-01	s IC	LMH6732MFX/NOPB
IC603	8-753-276-53	s IC	CXD1968AR-T6
IC604	8-753-276-53	s IC	CXD1968AR-T6
IC605	8-753-276-53	s IC	CXD1968AR-T6
IC608	6-713-951-01	s IC	LMH6624MFX
IC609	6-712-077-01	s IC	LMH6550MAX
IC610	6-712-077-01	s IC	LMH6550MAX
IC611	6-712-077-01	s IC	LMH6550MAX
IC801	8-759-337-40	s IC	NJM2904V (TE2)
IC802	8-759-337-40	s IC	NJM2904V (TE2)
IC803	8-759-337-40	s IC	NJM2904V (TE2)
IC804	6-706-487-01	s IC	TC7SH08FU(T5RSOYJF)
IC806	8-759-337-40	s IC	NJM2904V (TE2)
IC807	6-712-383-01	s IC	TC74VHC4051AFT(EK)
IC808	8-759-337-40	s IC	NJM2904V (TE2)
L1	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L2	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L3	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L4	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L5	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L6	1-400-542-11	s	INDUCTOR 330UH
L7	1-414-402-41	s	INDUCTOR (SMD) 47.0UH
L8	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L9	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L201	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L202	1-416-344-21	s	COIL, CHOKE 10UH
L203	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L204	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L205	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L206	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L301	1-412-935-21	s	INDUCTOR 0.47UH (2520)
L302	1-412-935-21	s	INDUCTOR 0.47UH (2520)
L303	1-412-939-21	s	INDUCTOR 1.0UH (2520)
L304	1-412-939-21	s	INDUCTOR 1.0UH (2520)
L305	1-456-900-11	s	INDUCTOR 68NH
L306	1-412-935-21	s	INDUCTOR 0.47UH (2520)
L307	1-456-906-11	s	INDUCTOR 820NH
L308	1-412-935-21	s	INDUCTOR 0.47UH (2520)
L401	1-412-935-21	s	INDUCTOR 0.47UH (2520)
L402	1-412-935-21	s	INDUCTOR 0.47UH (2520)
L403	1-412-939-21	s	INDUCTOR 1.0UH (2520)
L404	1-412-939-21	s	INDUCTOR 1.0UH (2520)
L405	1-456-900-11	s	INDUCTOR 68NH
L406	1-412-935-21	s	INDUCTOR 0.47UH (2520)
L407	1-456-906-11	s	INDUCTOR 820NH
L408	1-412-935-21	s	INDUCTOR 0.47UH (2520)
L501	1-412-935-21	s	INDUCTOR 0.47UH (2520)
L502	1-412-935-21	s	INDUCTOR 0.47UH (2520)
L503	1-412-939-21	s	INDUCTOR 1.0UH (2520)
L504	1-412-939-21	s	INDUCTOR 1.0UH (2520)
L505	1-456-901-11	s	INDUCTOR 82NH
L506	1-412-935-21	s	INDUCTOR 0.47UH (2520)
L507	1-456-906-11	s	INDUCTOR 820NH
L508	1-412-935-21	s	INDUCTOR 0.47UH (2520)
L601	1-414-392-41	s	INDUCTOR (SMD) 1.0UH

(TX-126 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
L602	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L603	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L604	1-412-935-21	s	INDUCTOR 0.47UH (2520)
L605	1-412-935-21	s	INDUCTOR 0.47UH (2520)
L606	1-481-609-11	s	INDUCTOR 240NH
L607	1-481-609-11	s	INDUCTOR 240NH
L608	1-481-609-11	s	INDUCTOR 240NH
L609	1-481-609-11	s	INDUCTOR 240NH
L610	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L611	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L612	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L613	1-400-520-11	s	INDUCTOR 4.7UH
L614	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L801	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L802	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
LV1	1-457-738-11	s	COIL, VARIABLE (150UH)
LV2	1-457-742-11	s	COIL, VARIABLE (1.0MHZ)
LV3	1-457-741-11	s	COIL, VARIABLE (1.0MHZ)
Q1	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q2	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q3	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q4	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q5	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q6	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q7	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q8	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q201	6-550-631-01	s	TRANSISTOR 2SA1797-T100-Q
Q202	6-550-631-01	s	TRANSISTOR 2SA1797-T100-Q
Q203	6-550-631-01	s	TRANSISTOR 2SA1797-T100-Q
Q204	6-550-632-01	s	TRANSISTOR 2SC4672-T100-Q
Q205	6-550-631-01	s	TRANSISTOR 2SA1797-T100-Q
Q206	6-550-631-01	s	TRANSISTOR 2SA1797-T100-Q
Q211	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q212	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q213	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q601	8-729-144-81	s	TRANSISTOR 2SC4176T1B33B34B35
Q602	8-729-144-81	s	TRANSISTOR 2SC4176T1B33B34B35
Q603	8-729-144-81	s	TRANSISTOR 2SC4176T1B33B34B35
Q604	8-729-111-97	s	TRANSISTOR 2SC3356-T1K
Q605	8-729-111-97	s	TRANSISTOR 2SC3356-T1K
Q606	8-729-144-81	s	TRANSISTOR 2SC4176T1B33B34B35
Q607	8-729-144-81	s	TRANSISTOR 2SC4176T1B33B34B35
Q608	8-729-144-81	s	TRANSISTOR 2SC4176T1B33B34B35
R1	1-208-923-81	s	RES, CHIP 33K (1005)
R2	1-208-907-81	s	RES, CHIP 6.8K (1005)
R3	1-208-919-81	s	RES, CHIP 22K (1005)
R4	1-243-975-81	s	RES, CHIP 4.7M (1005)
R5	1-243-975-81	s	RES, CHIP 4.7M (1005)
R6	1-208-947-81	s	RES, CHIP 330K (1005)
R7	1-208-863-81	s	RES, CHIP 100 (1005)
R9	1-208-911-81	s	RES, CHIP 10K (1005)
R10	1-208-911-81	s	RES, CHIP 10K (1005)
R11	1-208-911-81	s	RES, CHIP 10K (1005)
R12	1-208-911-81	s	RES, CHIP 10K (1005)
R13	1-208-879-81	s	RES, CHIP 470 (1005)
R14	1-208-895-81	s	RES, CHIP 2.2K (1005)
R15	1-208-911-81	s	RES, CHIP 10K (1005)
R16	1-208-911-81	s	RES, CHIP 10K (1005)

(TX-126 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R17	1-208-911-81 s	RES, CHIP 10K (1005)
R18	1-208-907-81 s	RES, CHIP 6.8K (1005)
R19	1-208-895-81 s	RES, CHIP 2.2K (1005)
R20	1-208-919-81 s	RES, CHIP 22K (1005)
R21	1-208-895-81 s	RES, CHIP 2.2K (1005)
R22	1-208-879-81 s	RES, CHIP 470 (1005)
R23	1-208-919-81 s	RES, CHIP 22K (1005)
R24	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R25	1-208-891-81 s	RES, CHIP 1.5K (1005)
R26	1-208-875-81 s	RES, CHIP 330 (1005)
R27	1-208-915-81 s	RES, CHIP 15K (1005)
R28	1-208-899-81 s	RES, CHIP 3.3K (1005)
R29	1-208-887-81 s	RES, CHIP 1.0K (1005)
R30	1-208-911-81 s	RES, CHIP 10K (1005)
R31	1-208-943-81 s	RES, CHIP 220K (1005)
R32	1-208-935-81 s	RES, CHIP 100K (1005)
R33	1-208-895-81 s	RES, CHIP 2.2K (1005)
R34	1-208-935-81 s	RES, CHIP 100K (1005)
R35	1-208-915-81 s	RES, CHIP 15K (1005)
R36	1-208-919-81 s	RES, CHIP 22K (1005)
R37	1-208-911-81 s	RES, CHIP 10K (1005)
R38	1-208-919-81 s	RES, CHIP 22K (1005)
R39	1-208-919-81 s	RES, CHIP 22K (1005)
R40	1-208-919-81 s	RES, CHIP 22K (1005)
R41	1-208-915-81 s	RES, CHIP 15K (1005)
R43	1-208-895-81 s	RES, CHIP 2.2K (1005)
R44	1-208-935-81 s	RES, CHIP 100K (1005)
R45	1-208-895-81 s	RES, CHIP 2.2K (1005)
R46	1-208-907-81 s	RES, CHIP 6.8K (1005)
R47	1-208-919-81 s	RES, CHIP 22K (1005)
R48	1-208-895-81 s	RES, CHIP 2.2K (1005)
R49	1-208-891-81 s	RES, CHIP 1.5K (1005)
R50	1-208-891-81 s	RES, CHIP 1.5K (1005)
R51	1-208-923-81 s	RES, CHIP 33K (1005)
R52	1-208-923-81 s	RES, CHIP 33K (1005)
R53	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R54	1-208-911-81 s	RES, CHIP 10K (1005)
R55	1-208-943-81 s	RES, CHIP 220K (1005)
R56	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R57	1-208-887-81 s	RES, CHIP 1.0K (1005)
R58	1-208-887-81 s	RES, CHIP 1.0K (1005)
R59	1-208-935-81 s	RES, CHIP 100K (1005)
R60	1-208-911-81 s	RES, CHIP 10K (1005)
R61	1-208-863-81 s	RES, CHIP 100 (1005)
R62	1-208-907-81 s	RES, CHIP 6.8K (1005)
R63	1-208-919-81 s	RES, CHIP 22K (1005)
R64	1-208-919-81 s	RES, CHIP 22K (1005)
R65	1-208-935-81 s	RES, CHIP 100K (1005)
R66	1-208-919-81 s	RES, CHIP 22K (1005)
R68	1-208-863-81 s	RES, CHIP 100 (1005)
R69	1-208-915-81 s	RES, CHIP 15K (1005)
R70	1-208-899-81 s	RES, CHIP 3.3K (1005)
R71	1-208-891-81 s	RES, CHIP 1.5K (1005)
R72	1-208-875-81 s	RES, CHIP 330 (1005)
R73	1-208-919-81 s	RES, CHIP 22K (1005)
R74	1-208-895-81 s	RES, CHIP 2.2K (1005)
R75	1-208-879-81 s	RES, CHIP 470 (1005)
R76	1-208-919-81 s	RES, CHIP 22K (1005)
R77	1-208-923-81 s	RES, CHIP 33K (1005)

(TX-126 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R78	1-208-927-81 s	RES, CHIP 47K (1005)
R79	1-208-927-81 s	RES, CHIP 47K (1005)
R80	1-208-923-81 s	RES, CHIP 33K (1005)
R81	1-208-863-81 s	RES, CHIP 100 (1005)
R82	1-208-911-81 s	RES, CHIP 10K (1005)
R83	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R84	1-208-903-81 s	RES, CHIP 4.7K (1005)
R85	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R86	1-208-903-81 s	RES, CHIP 4.7K (1005)
R87	1-208-923-81 s	RES, CHIP 33K (1005)
R88	1-208-939-81 s	RES, CHIP 150K (1005)
R89	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R90	1-208-927-81 s	RES, CHIP 47K (1005)
R91	1-208-891-81 s	RES, CHIP 1.5K (1005)
R92	1-208-863-81 s	RES, CHIP 100 (1005)
R96	1-208-931-81 s	RES, CHIP 68K (1005)
R97	1-208-907-81 s	RES, CHIP 6.8K (1005)
R100	1-208-919-81 s	RES, CHIP 22K (1005)
R101	1-208-911-81 s	RES, CHIP 10K (1005)
R103	1-208-935-81 s	RES, CHIP 100K (1005)
R104	1-208-899-81 s	RES, CHIP 3.3K (1005)
R105	1-208-915-81 s	RES, CHIP 15K (1005)
R106	1-208-927-81 s	RES, CHIP 47K (1005)
R107	1-208-899-81 s	RES, CHIP 3.3K (1005)
R109	1-208-891-81 s	RES, CHIP 1.5K (1005)
R110	1-208-891-81 s	RES, CHIP 1.5K (1005)
R111	1-208-923-81 s	RES, CHIP 33K (1005)
R112	1-208-923-81 s	RES, CHIP 33K (1005)
R113	1-218-851-91 s	RES, CHIP 1.5K (1608)
R114	1-220-870-81 s	RES, CHIP 10 (1005)
R115	1-208-903-81 s	RES, CHIP 4.7K (1005)
R116	1-208-895-81 s	RES, CHIP 2.2K (1005)
R117	1-208-927-81 s	RES, CHIP 47K (1005)
R119	1-208-899-81 s	RES, CHIP 3.3K (1005)
R120	1-208-895-81 s	RES, CHIP 2.2K (1005)
R121	1-208-911-81 s	RES, CHIP 10K (1005)
R122	1-208-943-81 s	RES, CHIP 220K (1005)
R124	1-208-923-81 s	RES, CHIP 33K (1005)
R125	1-220-804-81 s	RES, CHIP 2.2M
R126	1-208-863-81 s	RES, CHIP 100 (1005)
R127	1-208-903-81 s	RES, CHIP 4.7K (1005)
R128	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R129	1-208-903-81 s	RES, CHIP 4.7K (1005)
R130	1-208-923-81 s	RES, CHIP 33K (1005)
R131	1-208-911-81 s	RES, CHIP 10K (1005)
R132	1-220-870-81 s	RES, CHIP 10 (1005)
R133	1-208-919-81 s	RES, CHIP 22K (1005)
R137	1-208-895-81 s	RES, CHIP 2.2K (1005)
R201	1-208-871-81 s	RES, CHIP 220 (1005)
R202	1-208-935-81 s	RES, CHIP 100K (1005)
R203	1-208-875-81 s	RES, CHIP 330 (1005)
R204	1-208-923-81 s	RES, CHIP 33K (1005)
R205	1-208-911-81 s	RES, CHIP 10K (1005)
R206	1-208-943-81 s	RES, CHIP 220K (1005)
R208	1-208-871-81 s	RES, CHIP 220 (1005)
R209	1-208-923-81 s	RES, CHIP 33K (1005)
R210	1-208-923-81 s	RES, CHIP 33K (1005)
R211	1-208-943-81 s	RES, CHIP 220K (1005)
R212	1-208-907-81 s	RES, CHIP 6.8K (1005)

(TX-126 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R213	1-208-871-81 s	RES, CHIP 220 (1005)
R214	1-208-871-81 s	RES, CHIP 220 (1005)
R215	1-208-923-81 s	RES, CHIP 33K (1005)
R216	1-208-923-81 s	RES, CHIP 33K (1005)
R217	1-208-943-81 s	RES, CHIP 220K (1005)
R218	1-208-931-81 s	RES, CHIP 68K (1005)
R219	1-208-931-81 s	RES, CHIP 68K (1005)
R221	1-208-871-81 s	RES, CHIP 220 (1005)
R222	1-208-923-81 s	RES, CHIP 33K (1005)
R223	1-208-923-81 s	RES, CHIP 33K (1005)
R224	1-208-943-81 s	RES, CHIP 220K (1005)
R225	1-208-927-81 s	RES, CHIP 47K (1005)
R226	1-208-927-81 s	RES, CHIP 47K (1005)
R227	1-208-911-81 s	RES, CHIP 10K (1005)
R228	1-208-907-81 s	RES, CHIP 6.8K (1005)
R229	1-208-915-81 s	RES, CHIP 15K (1005)
R230	1-208-919-81 s	RES, CHIP 22K (1005)
R231	1-208-895-81 s	RES, CHIP 2.2K (1005)
R232	1-208-911-81 s	RES, CHIP 10K (1005)
R233	1-208-895-81 s	RES, CHIP 2.2K (1005)
R234	1-208-915-81 s	RES, CHIP 15K (1005)
R235	1-208-883-81 s	RES, CHIP 680 (1005)
R236	1-208-935-81 s	RES, CHIP 100K (1005)
R237	1-208-927-81 s	RES, CHIP 47K (1005)
R238	1-208-923-81 s	RES, CHIP 33K (1005)
R239	1-208-871-81 s	RES, CHIP 220 (1005)
R240	1-208-923-81 s	RES, CHIP 33K (1005)
R241	1-208-923-81 s	RES, CHIP 33K (1005)
R242	1-208-943-81 s	RES, CHIP 220K (1005)
R243	1-208-915-81 s	RES, CHIP 15K (1005)
R244	1-208-927-81 s	RES, CHIP 47K (1005)
R245	1-208-879-81 s	RES, CHIP 470 (1005)
R246	1-242-967-81 s	RES, CHIP 1.0 (1005)
R247	1-242-967-81 s	RES, CHIP 1.0 (1005)
R248	1-242-967-81 s	RES, CHIP 1.0 (1005)
R249	1-242-967-81 s	RES, CHIP 1.0 (1005)
R250	1-242-967-81 s	RES, CHIP 1.0 (1005)
R251	1-242-967-81 s	RES, CHIP 1.0 (1005)
R252	1-242-967-81 s	RES, CHIP 1.0 (1005)
R253	1-242-967-81 s	RES, CHIP 1.0 (1005)
R254	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R255	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R256	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R257	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R265	1-208-927-81 s	RES, CHIP 47K (1005)
R266	1-208-911-81 s	RES, CHIP 10K (1005)
R267	1-208-927-81 s	RES, CHIP 47K (1005)
R268	1-208-911-81 s	RES, CHIP 10K (1005)
R269	1-208-927-81 s	RES, CHIP 47K (1005)
R270	1-208-911-81 s	RES, CHIP 10K (1005)
R301	1-208-879-81 s	RES, CHIP 470 (1005)
R302	1-208-879-81 s	RES, CHIP 470 (1005)
R303	1-208-863-81 s	RES, CHIP 100 (1005)
R304	1-208-895-81 s	RES, CHIP 2.2K (1005)
R306	1-208-927-81 s	RES, CHIP 47K (1005)
R307	1-208-907-81 s	RES, CHIP 6.8K (1005)
R308	1-208-903-81 s	RES, CHIP 4.7K (1005)
R309	1-220-882-81 s	RES, CHIP 33 (1005)
R310	1-208-911-81 s	RES, CHIP 10K (1005)

(TX-126 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R311	1-208-931-81 s	RES, CHIP 68K (1005)
R312	1-208-895-81 s	RES, CHIP 2.2K (1005)
R313	1-208-911-81 s	RES, CHIP 10K (1005)
R314	1-208-863-81 s	RES, CHIP 100 (1005)
R315	1-208-863-81 s	RES, CHIP 100 (1005)
R316	1-208-887-81 s	RES, CHIP 1.0K (1005)
R317	1-208-871-81 s	RES, CHIP 220 (1005)
R318	1-208-903-81 s	RES, CHIP 4.7K (1005)
R319	1-208-915-81 s	RES, CHIP 15K (1005)
R321	1-208-871-81 s	RES, CHIP 220 (1005)
R323	1-208-935-81 s	RES, CHIP 100K (1005)
R324	1-208-907-81 s	RES, CHIP 6.8K (1005)
R325	1-208-887-81 s	RES, CHIP 1.0K (1005)
R326	1-208-903-81 s	RES, CHIP 4.7K (1005)
R327	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R328	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R329	1-208-915-81 s	RES, CHIP 15K (1005)
R331	1-208-863-81 s	RES, CHIP 100 (1005)
R332	1-208-863-81 s	RES, CHIP 100 (1005)
R333	1-208-875-81 s	RES, CHIP 330 (1005)
R334	1-208-875-81 s	RES, CHIP 330 (1005)
R335	1-208-875-81 s	RES, CHIP 330 (1005)
R401	1-208-879-81 s	RES, CHIP 470 (1005)
R402	1-208-879-81 s	RES, CHIP 470 (1005)
R403	1-208-863-81 s	RES, CHIP 100 (1005)
R404	1-208-887-81 s	RES, CHIP 1.0K (1005)
R406	1-208-931-81 s	RES, CHIP 68K (1005)
R407	1-208-907-81 s	RES, CHIP 6.8K (1005)
R408	1-208-903-81 s	RES, CHIP 4.7K (1005)
R409	1-220-882-81 s	RES, CHIP 33 (1005)
R410	1-208-911-81 s	RES, CHIP 10K (1005)
R411	1-208-931-81 s	RES, CHIP 68K (1005)
R412	1-208-895-81 s	RES, CHIP 2.2K (1005)
R413	1-208-911-81 s	RES, CHIP 10K (1005)
R414	1-208-863-81 s	RES, CHIP 100 (1005)
R415	1-208-863-81 s	RES, CHIP 100 (1005)
R416	1-208-887-81 s	RES, CHIP 1.0K (1005)
R417	1-208-871-81 s	RES, CHIP 220 (1005)
R418	1-208-907-81 s	RES, CHIP 6.8K (1005)
R419	1-208-919-81 s	RES, CHIP 22K (1005)
R421	1-208-871-81 s	RES, CHIP 220 (1005)
R423	1-208-935-81 s	RES, CHIP 100K (1005)
R424	1-208-907-81 s	RES, CHIP 6.8K (1005)
R425	1-208-887-81 s	RES, CHIP 1.0K (1005)
R426	1-208-903-81 s	RES, CHIP 4.7K (1005)
R427	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R428	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R429	1-208-927-81 s	RES, CHIP 47K (1005)
R430	1-208-923-81 s	RES, CHIP 33K (1005)
R431	1-208-863-81 s	RES, CHIP 100 (1005)
R432	1-208-863-81 s	RES, CHIP 100 (1005)
R433	1-208-875-81 s	RES, CHIP 330 (1005)
R434	1-208-875-81 s	RES, CHIP 330 (1005)
R435	1-208-875-81 s	RES, CHIP 330 (1005)
R501	1-208-879-81 s	RES, CHIP 470 (1005)
R502	1-208-879-81 s	RES, CHIP 470 (1005)
R503	1-208-863-81 s	RES, CHIP 100 (1005)
R504	1-208-895-81 s	RES, CHIP 2.2K (1005)
R505	1-208-899-81 s	RES, CHIP 3.3K (1005)

(TX-126 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R506	1-208-931-81 s	RES, CHIP 68K (1005)
R507	1-208-907-81 s	RES, CHIP 6.8K (1005)
R508	1-208-903-81 s	RES, CHIP 4.7K (1005)
R509	1-220-882-81 s	RES, CHIP 33 (1005)
R510	1-208-911-81 s	RES, CHIP 10K (1005)
R511	1-208-931-81 s	RES, CHIP 68K (1005)
R512	1-208-895-81 s	RES, CHIP 2.2K (1005)
R513	1-208-907-81 s	RES, CHIP 6.8K (1005)
R514	1-208-863-81 s	RES, CHIP 100 (1005)
R515	1-208-863-81 s	RES, CHIP 100 (1005)
R516	1-208-887-81 s	RES, CHIP 1.0K (1005)
R517	1-208-871-81 s	RES, CHIP 220 (1005)
R518	1-208-871-81 s	RES, CHIP 220 (1005)
R519	1-208-907-81 s	RES, CHIP 6.8K (1005)
R523	1-208-935-81 s	RES, CHIP 100K (1005)
R524	1-208-907-81 s	RES, CHIP 6.8K (1005)
R525	1-208-887-81 s	RES, CHIP 1.0K (1005)
R526	1-208-903-81 s	RES, CHIP 4.7K (1005)
R527	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R528	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R529	1-208-927-81 s	RES, CHIP 47K (1005)
R530	1-208-927-81 s	RES, CHIP 47K (1005)
R531	1-208-863-81 s	RES, CHIP 100 (1005)
R532	1-208-863-81 s	RES, CHIP 100 (1005)
R533	1-208-875-81 s	RES, CHIP 330 (1005)
R534	1-208-875-81 s	RES, CHIP 330 (1005)
R535	1-208-875-81 s	RES, CHIP 330 (1005)
R599	1-208-871-81 s	RES, CHIP 220 (1005)
R600	1-208-931-81 s	RES, CHIP 68K (1005)
R601	1-208-863-81 s	RES, CHIP 100 (1005)
R602	1-208-860-81 s	RES, CHIP 75 (1005)
R603	1-208-891-81 s	RES, CHIP 1.5K (1005)
R605	1-208-911-81 s	RES, CHIP 10K (1005)
R606	1-208-911-81 s	RES, CHIP 10K (1005)
R607	1-208-935-81 s	RES, CHIP 100K (1005)
R608	1-208-907-81 s	RES, CHIP 6.8K (1005)
R609	1-208-871-81 s	RES, CHIP 220 (1005)
R610	1-208-959-81 s	RES, CHIP 1M (1005)
R611	1-208-959-81 s	RES, CHIP 1M (1005)
R612	1-208-887-81 s	RES, CHIP 1.0K (1005)
R613	1-208-911-81 s	RES, CHIP 10K (1005)
R614	1-208-911-81 s	RES, CHIP 10K (1005)
R618	1-208-911-81 s	RES, CHIP 10K (1005)
R619	1-208-911-81 s	RES, CHIP 10K (1005)
R620	1-208-911-81 s	RES, CHIP 10K (1005)
R621	1-208-911-81 s	RES, CHIP 10K (1005)
R622	1-220-878-81 s	RES, CHIP 22 (1005)
R623	1-220-878-81 s	RES, CHIP 22 (1005)
R624	1-208-855-81 s	RES, CHIP 47 (1005)
R627	1-208-871-81 s	RES, CHIP 220 (1005)
R628	1-208-959-81 s	RES, CHIP 1M (1005)
R629	1-208-959-81 s	RES, CHIP 1M (1005)
R630	1-208-887-81 s	RES, CHIP 1.0K (1005)
R631	1-208-911-81 s	RES, CHIP 10K (1005)
R632	1-208-911-81 s	RES, CHIP 10K (1005)
R636	1-208-911-81 s	RES, CHIP 10K (1005)
R637	1-208-911-81 s	RES, CHIP 10K (1005)
R638	1-208-911-81 s	RES, CHIP 10K (1005)
R639	1-208-911-81 s	RES, CHIP 10K (1005)

(TX-126 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R640	1-220-878-81 s	RES, CHIP 22 (1005)
R641	1-220-878-81 s	RES, CHIP 22 (1005)
R642	1-208-855-81 s	RES, CHIP 47 (1005)
R643	1-208-871-81 s	RES, CHIP 220 (1005)
R644	1-208-959-81 s	RES, CHIP 1M (1005)
R645	1-208-959-81 s	RES, CHIP 1M (1005)
R646	1-208-887-81 s	RES, CHIP 1.0K (1005)
R647	1-208-911-81 s	RES, CHIP 10K (1005)
R648	1-208-911-81 s	RES, CHIP 10K (1005)
R652	1-208-911-81 s	RES, CHIP 10K (1005)
R653	1-208-911-81 s	RES, CHIP 10K (1005)
R654	1-208-903-81 s	RES, CHIP 4.7K (1005)
R655	1-208-903-81 s	RES, CHIP 4.7K (1005)
R656	1-220-878-81 s	RES, CHIP 22 (1005)
R657	1-220-878-81 s	RES, CHIP 22 (1005)
R658	1-208-855-81 s	RES, CHIP 47 (1005)
R661	1-208-915-81 s	RES, CHIP 15K (1005)
R663	1-208-911-81 s	RES, CHIP 10K (1005)
R664	1-208-887-81 s	RES, CHIP 1.0K (1005)
R665	1-208-903-81 s	RES, CHIP 4.7K (1005)
R666	1-208-875-81 s	RES, CHIP 330 (1005)
R667	1-208-875-81 s	RES, CHIP 330 (1005)
R668	1-208-907-81 s	RES, CHIP 6.8K (1005)
R669	1-208-907-81 s	RES, CHIP 6.8K (1005)
R670	1-208-907-81 s	RES, CHIP 6.8K (1005)
R671	1-208-879-81 s	RES, CHIP 470 (1005)
R672	1-208-879-81 s	RES, CHIP 470 (1005)
R673	1-208-863-81 s	RES, CHIP 100 (1005)
R674	1-208-875-81 s	RES, CHIP 330 (1005)
R675	1-208-871-81 s	RES, CHIP 220 (1005)
R676	1-208-875-81 s	RES, CHIP 330 (1005)
R677	1-208-871-81 s	RES, CHIP 220 (1005)
R678	1-208-879-81 s	RES, CHIP 470 (1005)
R679	1-208-887-81 s	RES, CHIP 1.0K (1005)
R680	1-208-863-81 s	RES, CHIP 100 (1005)
R681	1-208-887-81 s	RES, CHIP 1.0K (1005)
R682	1-208-863-81 s	RES, CHIP 100 (1005)
R683	1-208-875-81 s	RES, CHIP 330 (1005)
R684	1-208-871-81 s	RES, CHIP 220 (1005)
R685	1-208-875-81 s	RES, CHIP 330 (1005)
R686	1-208-871-81 s	RES, CHIP 220 (1005)
R687	1-208-879-81 s	RES, CHIP 470 (1005)
R689	1-208-871-81 s	RES, CHIP 220 (1005)
R690	1-208-871-81 s	RES, CHIP 220 (1005)
R691	1-208-911-81 s	RES, CHIP 10K (1005)
R692	1-208-871-81 s	RES, CHIP 220 (1005)
R693	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R694	1-208-907-81 s	RES, CHIP 6.8K (1005)
R695	1-208-895-81 s	RES, CHIP 2.2K (1005)
R696	1-220-882-81 s	RES, CHIP 33 (1005)
R697	1-220-882-81 s	RES, CHIP 33 (1005)
R698	1-208-887-81 s	RES, CHIP 1.0K (1005)
R699	1-208-863-81 s	RES, CHIP 100 (1005)
R700	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R701	1-208-935-81 s	RES, CHIP 100K (1005)
R703	1-208-871-81 s	RES, CHIP 220 (1005)
R704	1-208-871-81 s	RES, CHIP 220 (1005)
R705	1-208-867-81 s	RES, CHIP 150 (1005)
R706	1-208-867-81 s	RES, CHIP 150 (1005)

(TX-126 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R707	1-208-891-81	s RES, CHIP 1.5K (1005)
R708	1-208-891-81	s RES, CHIP 1.5K (1005)
R709	1-208-911-81	s RES, CHIP 10K (1005)
R710	1-208-911-81	s RES, CHIP 10K (1005)
R711	1-208-875-81	s RES, CHIP 330 (1005)
R712	1-208-875-81	s RES, CHIP 330 (1005)
R713	1-208-863-81	s RES, CHIP 100 (1005)
R714	1-208-911-81	s RES, CHIP 10K (1005)
R715	1-208-911-81	s RES, CHIP 10K (1005)
R716	1-208-879-81	s RES, CHIP 470 (1005)
R717	1-208-895-81	s RES, CHIP 2.2K (1005)
R718	1-208-871-81	s RES, CHIP 220 (1005)
R719	1-218-990-81	s CONDUCTOR, CHIP (1005)
R720	1-208-887-81	s RES, CHIP 1.0K (1005)
R721	1-208-887-81	s RES, CHIP 1.0K (1005)
R801	1-208-887-81	s RES, CHIP 1.0K (1005)
R802	1-208-887-81	s RES, CHIP 1.0K (1005)
R803	1-208-887-81	s RES, CHIP 1.0K (1005)
R804	1-208-863-81	s RES, CHIP 100 (1005)
R805	1-208-887-81	s RES, CHIP 1.0K (1005)
R806	1-208-887-81	s RES, CHIP 1.0K (1005)
R807	1-208-887-81	s RES, CHIP 1.0K (1005)
R808	1-208-863-81	s RES, CHIP 100 (1005)
R809	1-208-887-81	s RES, CHIP 1.0K (1005)
R810	1-208-887-81	s RES, CHIP 1.0K (1005)
R811	1-208-887-81	s RES, CHIP 1.0K (1005)
R812	1-208-919-81	s RES, CHIP 22K (1005)
R813	1-208-919-81	s RES, CHIP 22K (1005)
R815	1-208-951-81	s RES, CHIP 470K (1005)
R816	1-208-863-81	s RES, CHIP 100 (1005)
R817	1-208-919-81	s RES, CHIP 22K (1005)
R819	1-208-903-81	s RES, CHIP 4.7K (1005)
R823	1-208-911-81	s RES, CHIP 10K (1005)
R824	1-220-870-81	s RES, CHIP 10 (1005)
R825	1-220-870-81	s RES, CHIP 10 (1005)
R826	1-220-870-81	s RES, CHIP 10 (1005)
R828	1-208-927-81	s RES, CHIP 47K (1005)
R829	1-208-927-81	s RES, CHIP 47K (1005)
R830	1-208-863-81	s RES, CHIP 100 (1005)
R831	1-208-915-81	s RES, CHIP 15K (1005)
R832	1-208-915-81	s RES, CHIP 15K (1005)
R833	1-220-870-81	s RES, CHIP 10 (1005)
R834	1-208-911-81	s RES, CHIP 10K (1005)
R835	1-208-911-81	s RES, CHIP 10K (1005)
R836	1-208-911-81	s RES, CHIP 10K (1005)
RB601	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB602	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB603	1-234-371-21	s RES, NETWORK 47 (1005X4)
RV1	1-225-791-21	s RES, ADJ, CERMET 5K
RV2	1-225-793-21	s RES, ADJ, CERMET 20K
SWF301	1-813-413-11	s FILTER, SAW
SWF401	1-813-413-11	s FILTER, SAW
SWF501	1-813-413-11	s FILTER, SAW
T601	1-445-611-11	s TRANSFORMER, BALUN
THP201	Δ 1-804-458-21	s THERMISTOR, POSITIVE
THP202	Δ 1-804-616-21	s THERMISTOR, POSITIVE
THP203	Δ 1-804-458-21	s THERMISTOR, POSITIVE

(TX-126 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
THP204	Δ 1-804-458-21	s THERMISTOR, POSITIVE
TP1	1-535-877-22	s CHIP, CHECKER
TP2	1-535-877-22	s CHIP, CHECKER
TP4	1-535-877-22	s CHIP, CHECKER
TP201	1-780-318-11	s TERMINAL, LUG
TP202	1-780-318-11	s TERMINAL, LUG
X1	1-781-696-21	s VIBRATOR, CRYSTAL
X601	1-579-477-21	s VIBRATOR, CRYSTAL

1-4. Optional Fixtures

Part No.	SP Description
----------	----------------


A-8326-017-A	s MOUNTED CIRCUIT BOARD, ROM-28
A-8327-351-A	o MOUNTED CIRCUIT BOARD, EX-738
A-8344-327-A	s EXTENSION ASSY,DPR-197

1-5. Supplied Accessories


*J: [HSC-300(J)]
*UC: [HSC-300(UC)]
*CE: [HSC-300(CE)]

Q'ty	Part No.	SP Description
2pcs	3-603-679-02	s STAINLESS SCREW +B3X10
1pc	*J Δ 4-137-696-01	s MANUAL, OPERATION
1pc	*UC*CE Δ 4-137-697-01	s MANUAL, OPERATION
1pc	*UC*CE 4-137-703-01	s CD-ROM PACK
1pc	4-138-677-01	s BRACKET, BELT
1/2pcs	4-138-727-01	s LABEL(HANDLE)
1pc	4-138-758-01	s CLAMP BELT, CABLE

Section 2
Block Diagrams

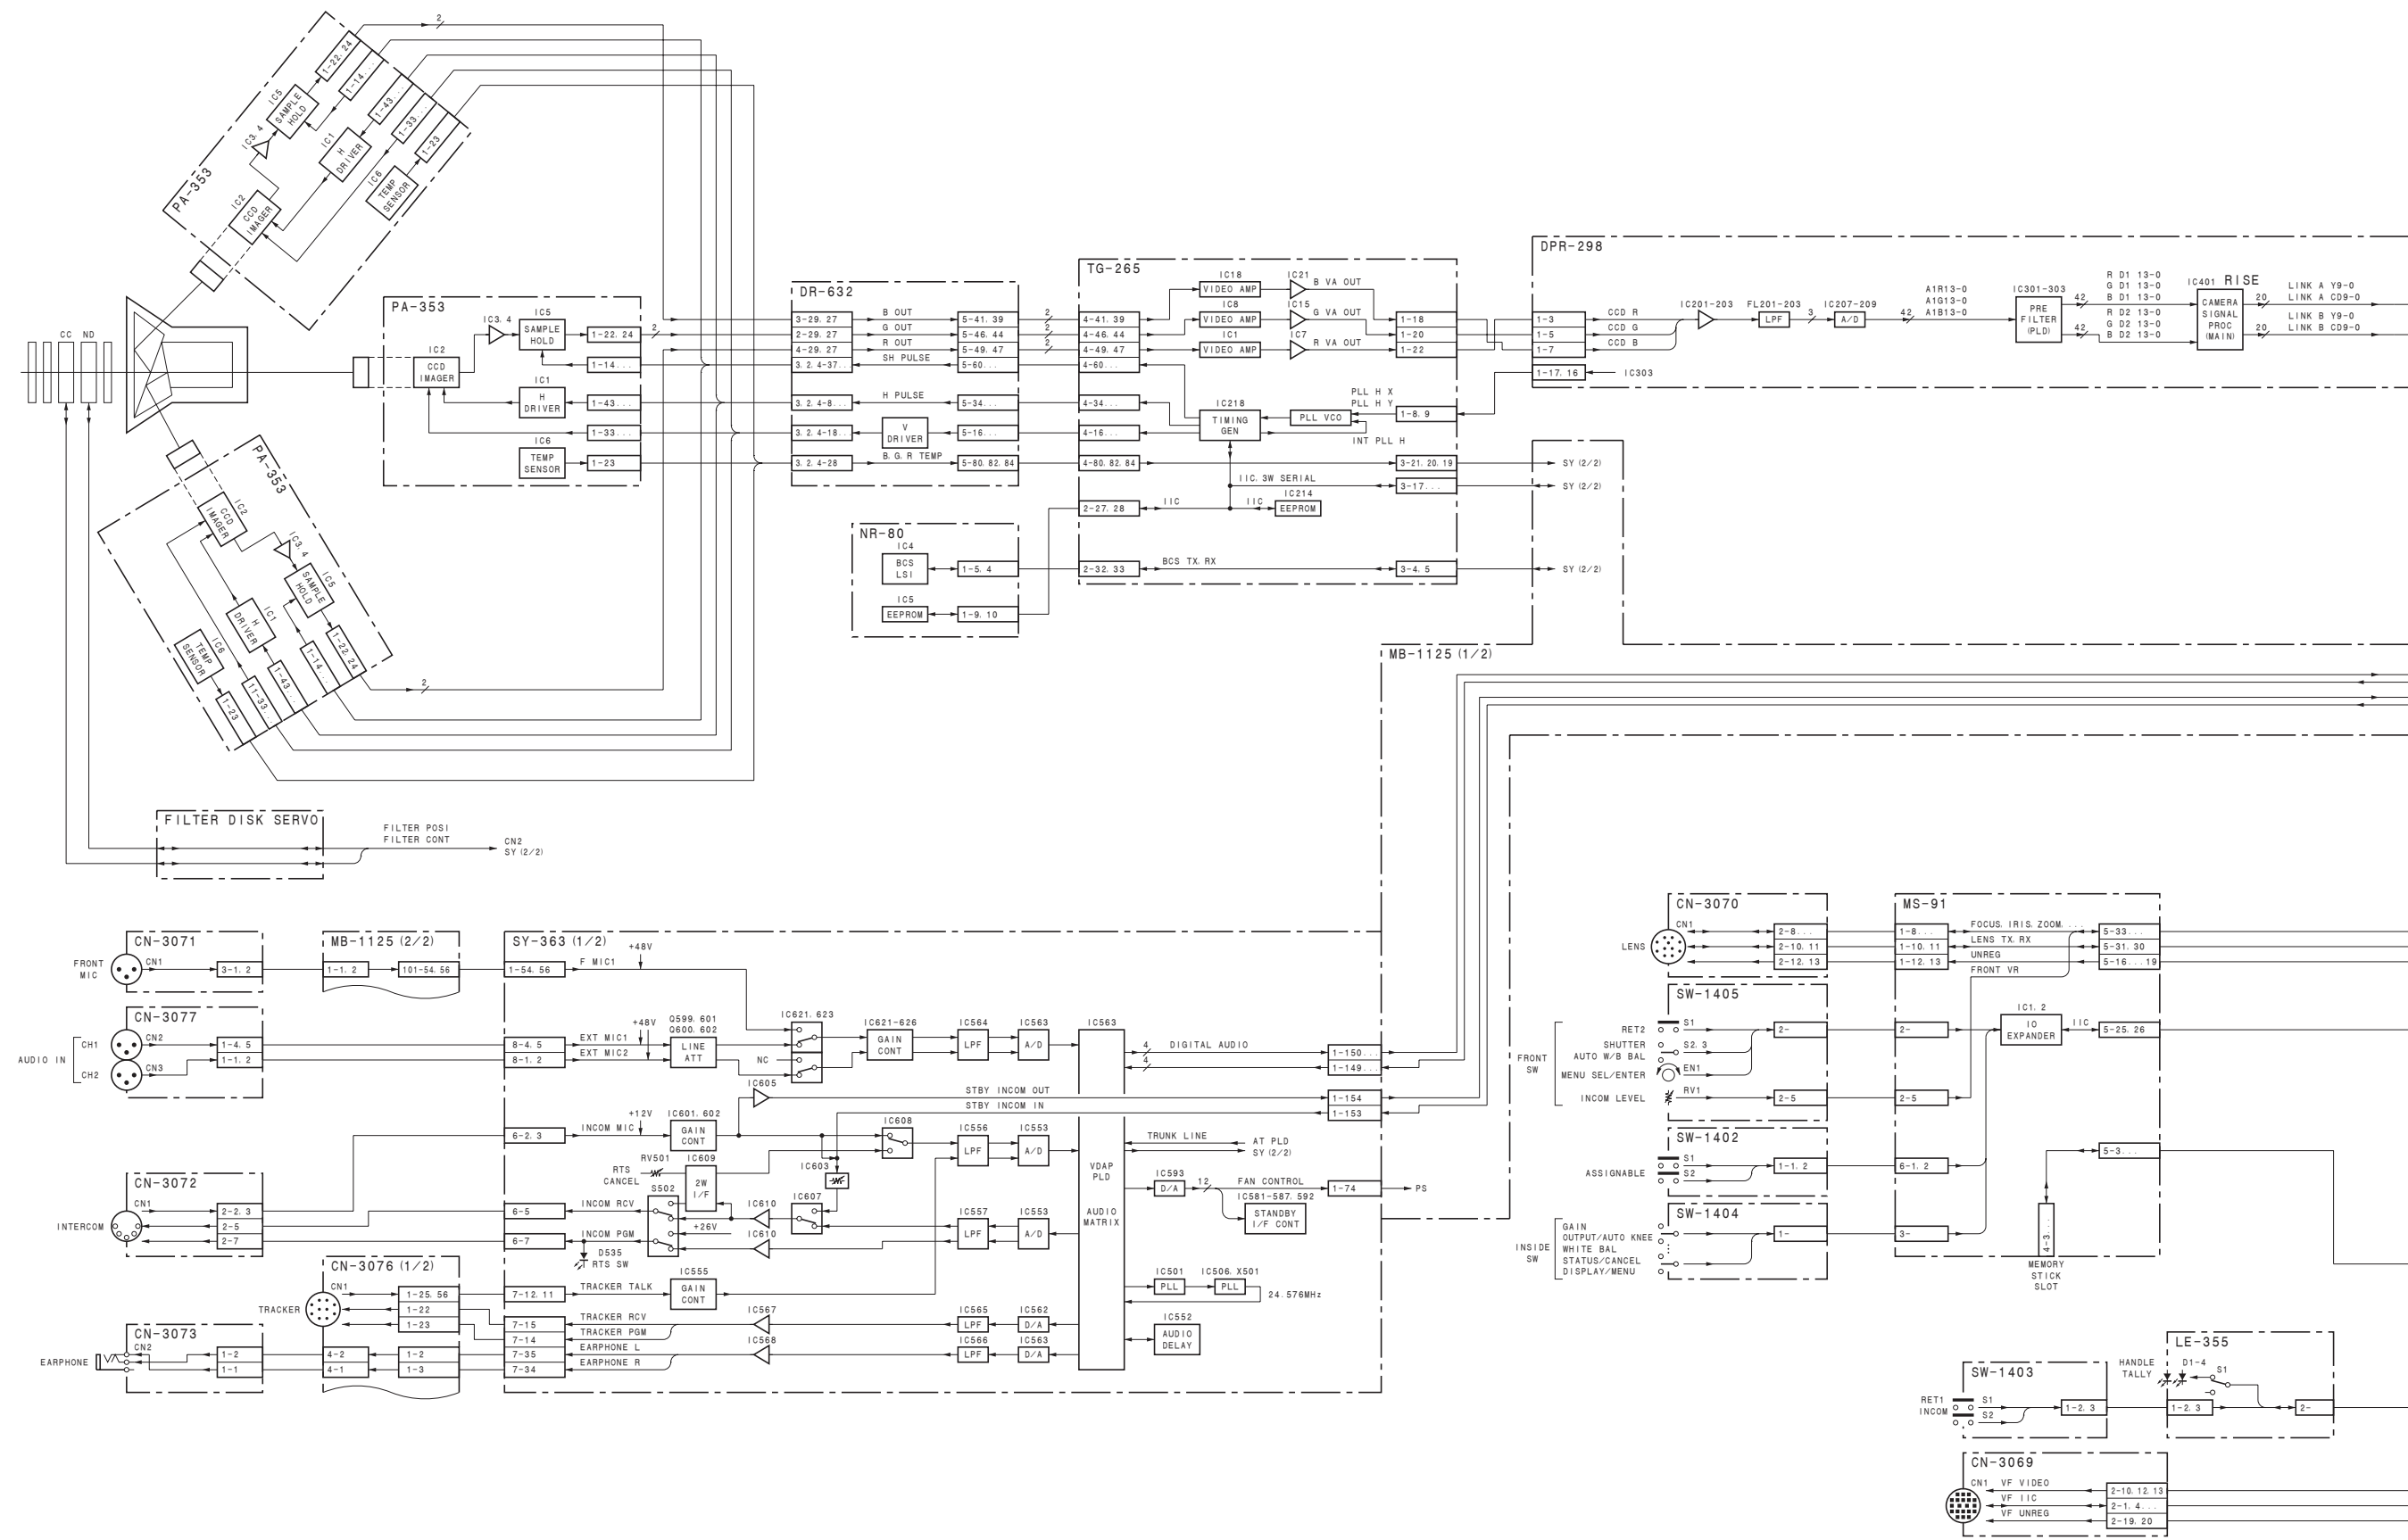

Overall	Overall
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9
10	10
11	11
12	12
13	13
14	14
15	15
16	16
17	17
18	18
19	19
20	20
21	21
22	22
23	23
24	24
25	25
26	26
27	27
28	28
29	29
30	30
31	31
32	32
33	33
34	34
35	35
36	36
37	37
38	38
39	39
40	40
41	41
42	42
43	43
44	44
45	45
46	46
47	47
48	48
49	49
50	50
51	51
52	52
53	53
54	54
55	55
56	56
57	57
58	58
59	59
60	60
61	61
62	62
63	63
64	64
65	65
66	66
67	67
68	68
69	69
70	70
71	71
72	72
73	73
74	74
75	75
76	76
77	77
78	78
79	79
80	80
81	81
82	82
83	83
84	84
85	85
86	86
87	87
88	88
89	89
90	90
91	91
92	92
93	93
94	94
95	95
96	96
97	97
98	98
99	99
100	100

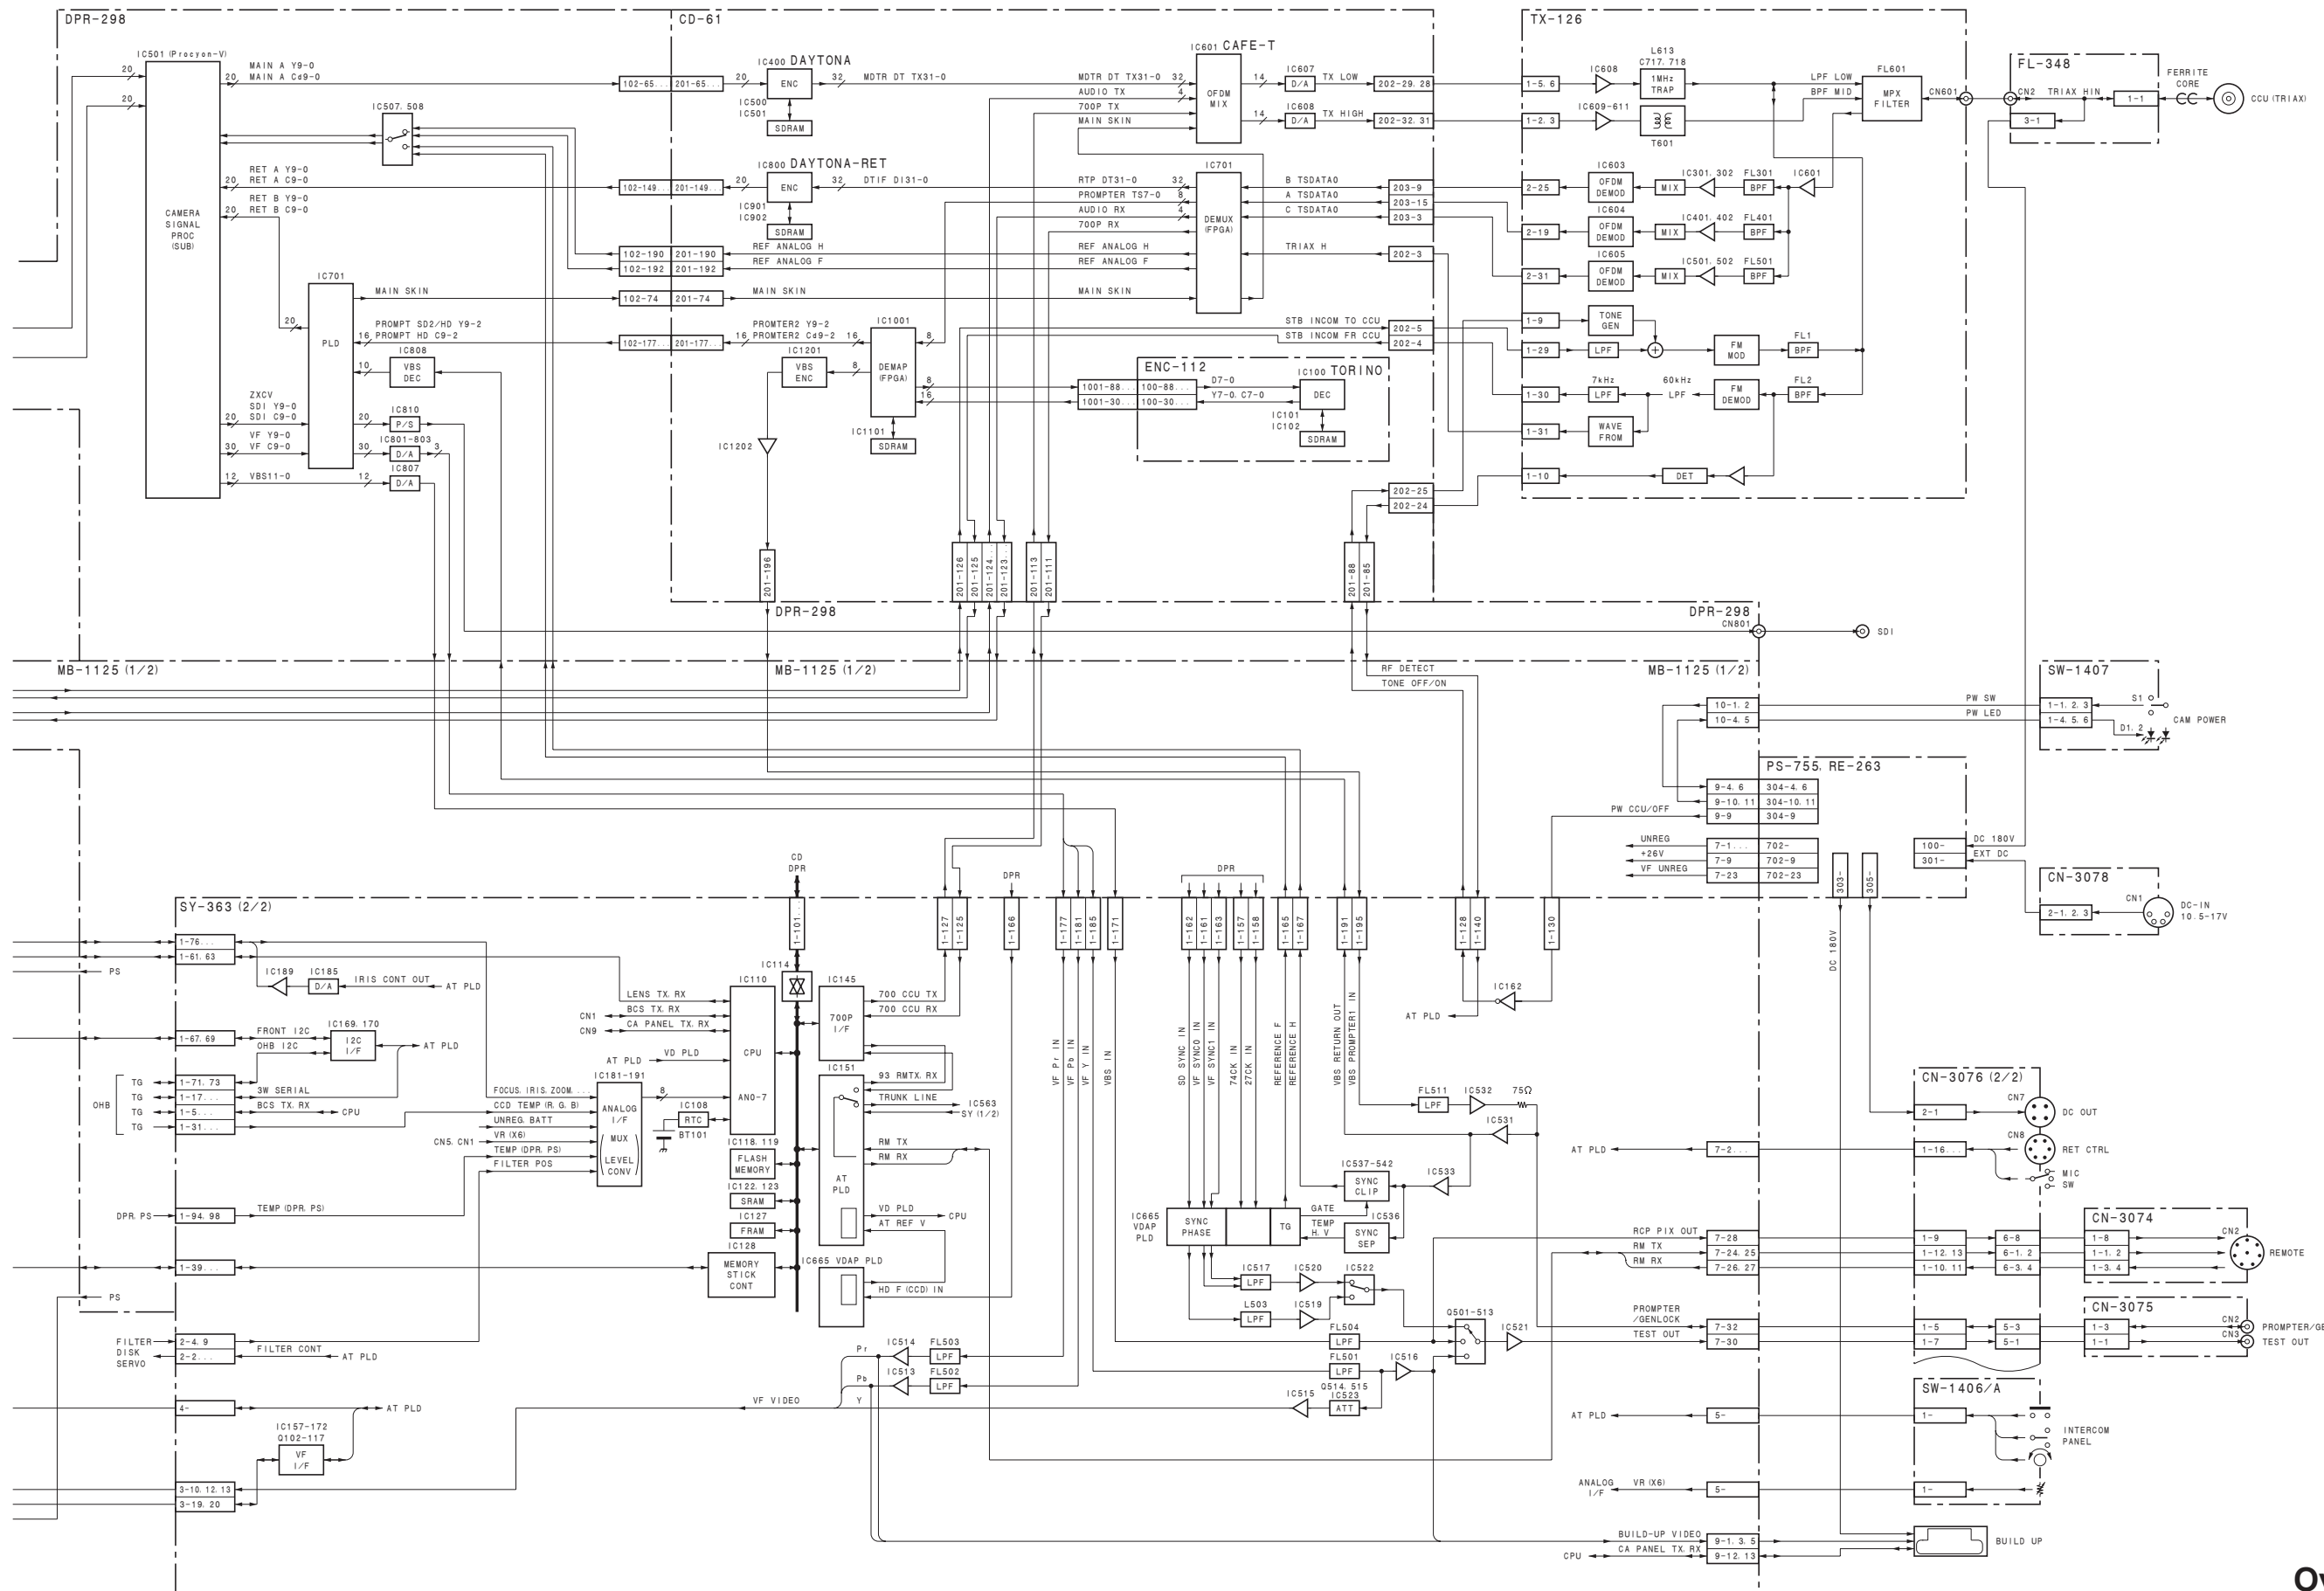

Overall

Section 3


Schematic Diagrams

Index


Board name		Page
C.	CD-61	3-2
	CN-3069	3-22
	CN-3070	3-22
	CN-3071	3-22
	CN-3072	3-22
	CN-3073	3-22
	CN-3074	3-22
	CN-3075	3-22
	CN-3076	3-23
	CN-3077	3-23
	CN-3078	3-23
D.	DPR-298	3-24
	DR-632	3-42
E.	ENC-112	3-44
F.	FL-348	3-46
	Frame Wiring	3-83
L.	LE-355	3-46
M.	MB-1125	3-47
	MS-91	3-49
N.	NR-80	3-50
P.	PA-353	3-52
	PS-755	*
R.	RE-263	*
S.	SW-1402	3-53
	SW-1403	3-53
	SW-1404	3-53
	SW-1405	3-53
	SW-1406/A	3-53
	SW-1407	3-53
	SY-363	3-55
T.	TG-265	3-72
	TX-126	3-76

※: The schematic diagram of this board is not described in this manual.


1

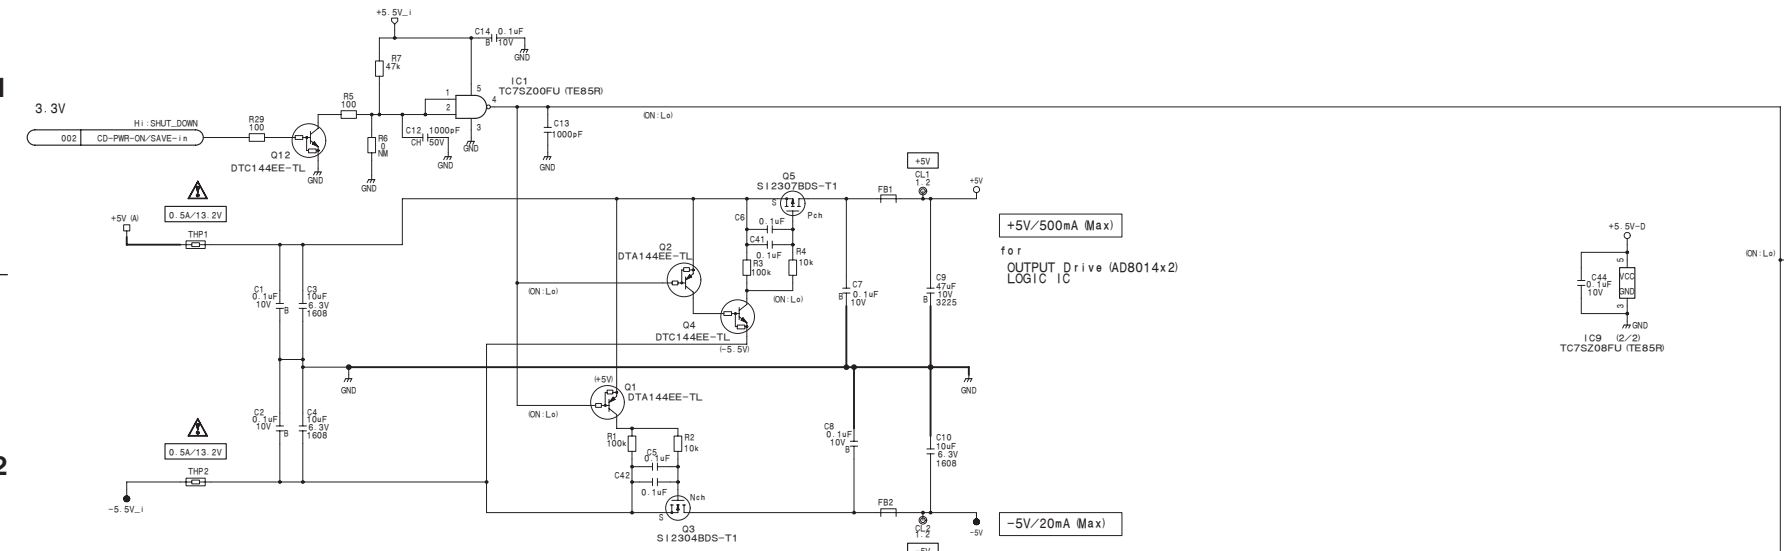


2

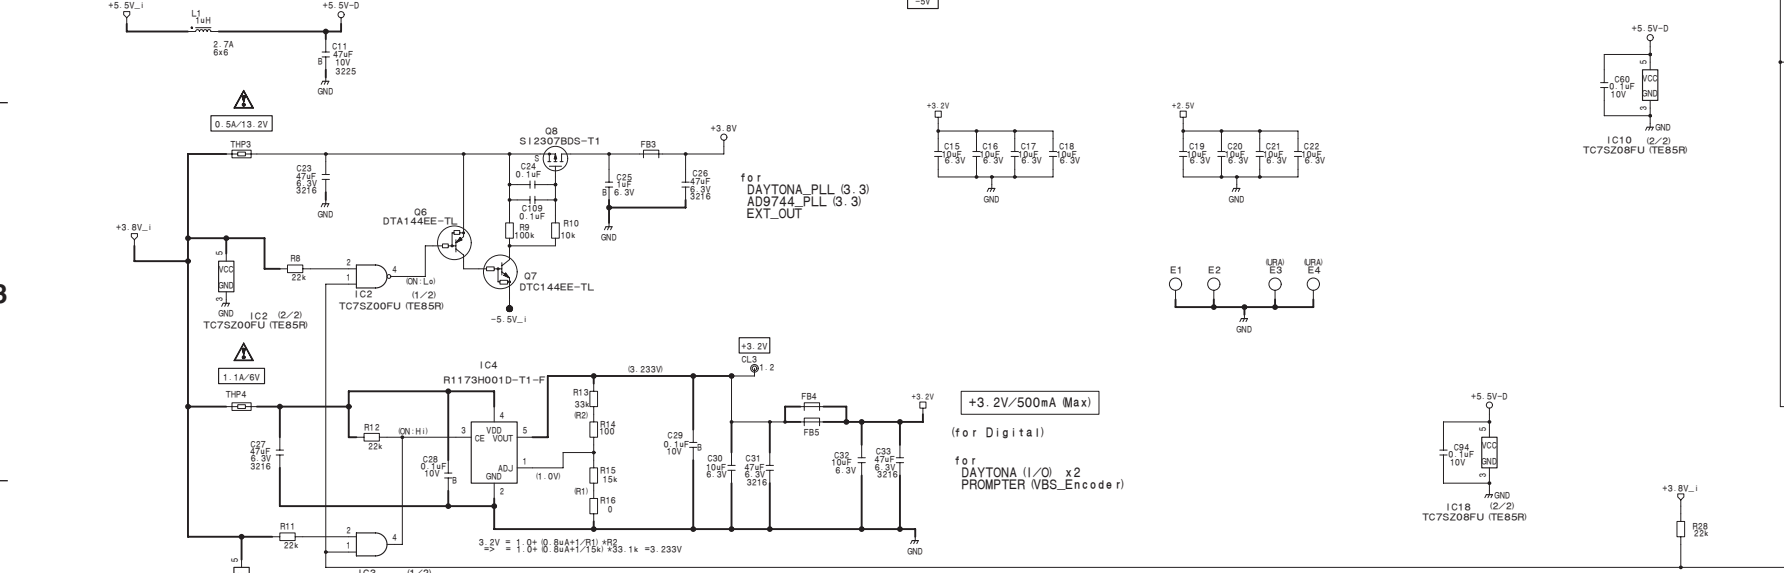


3

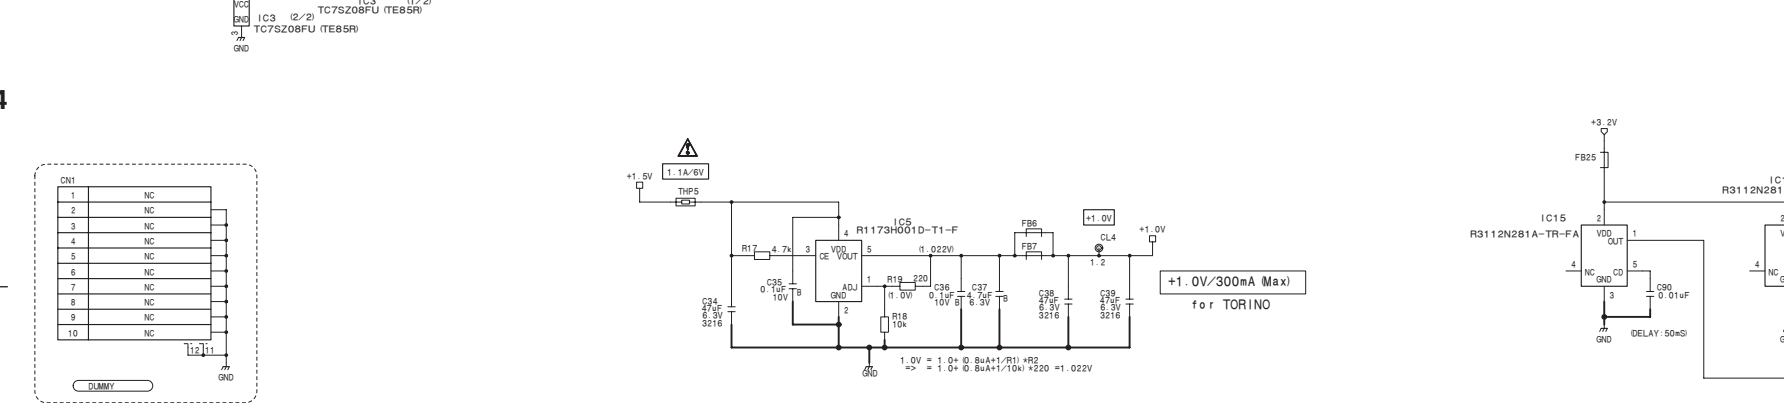


4

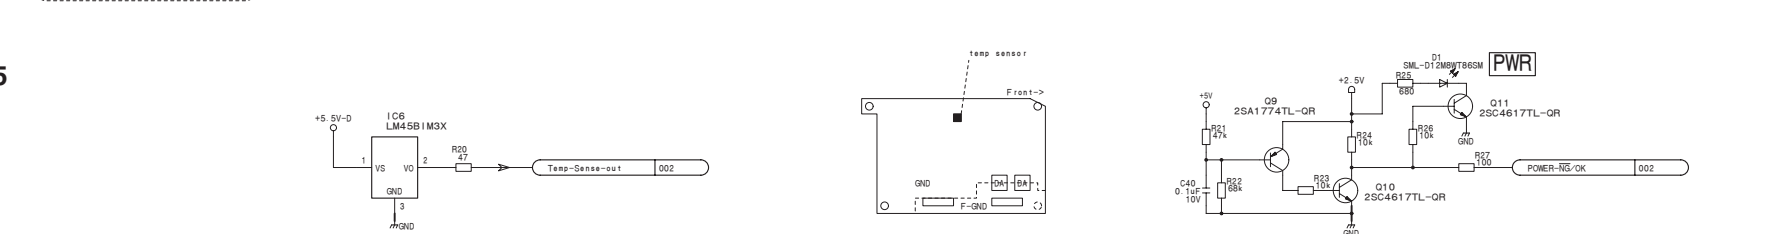

5


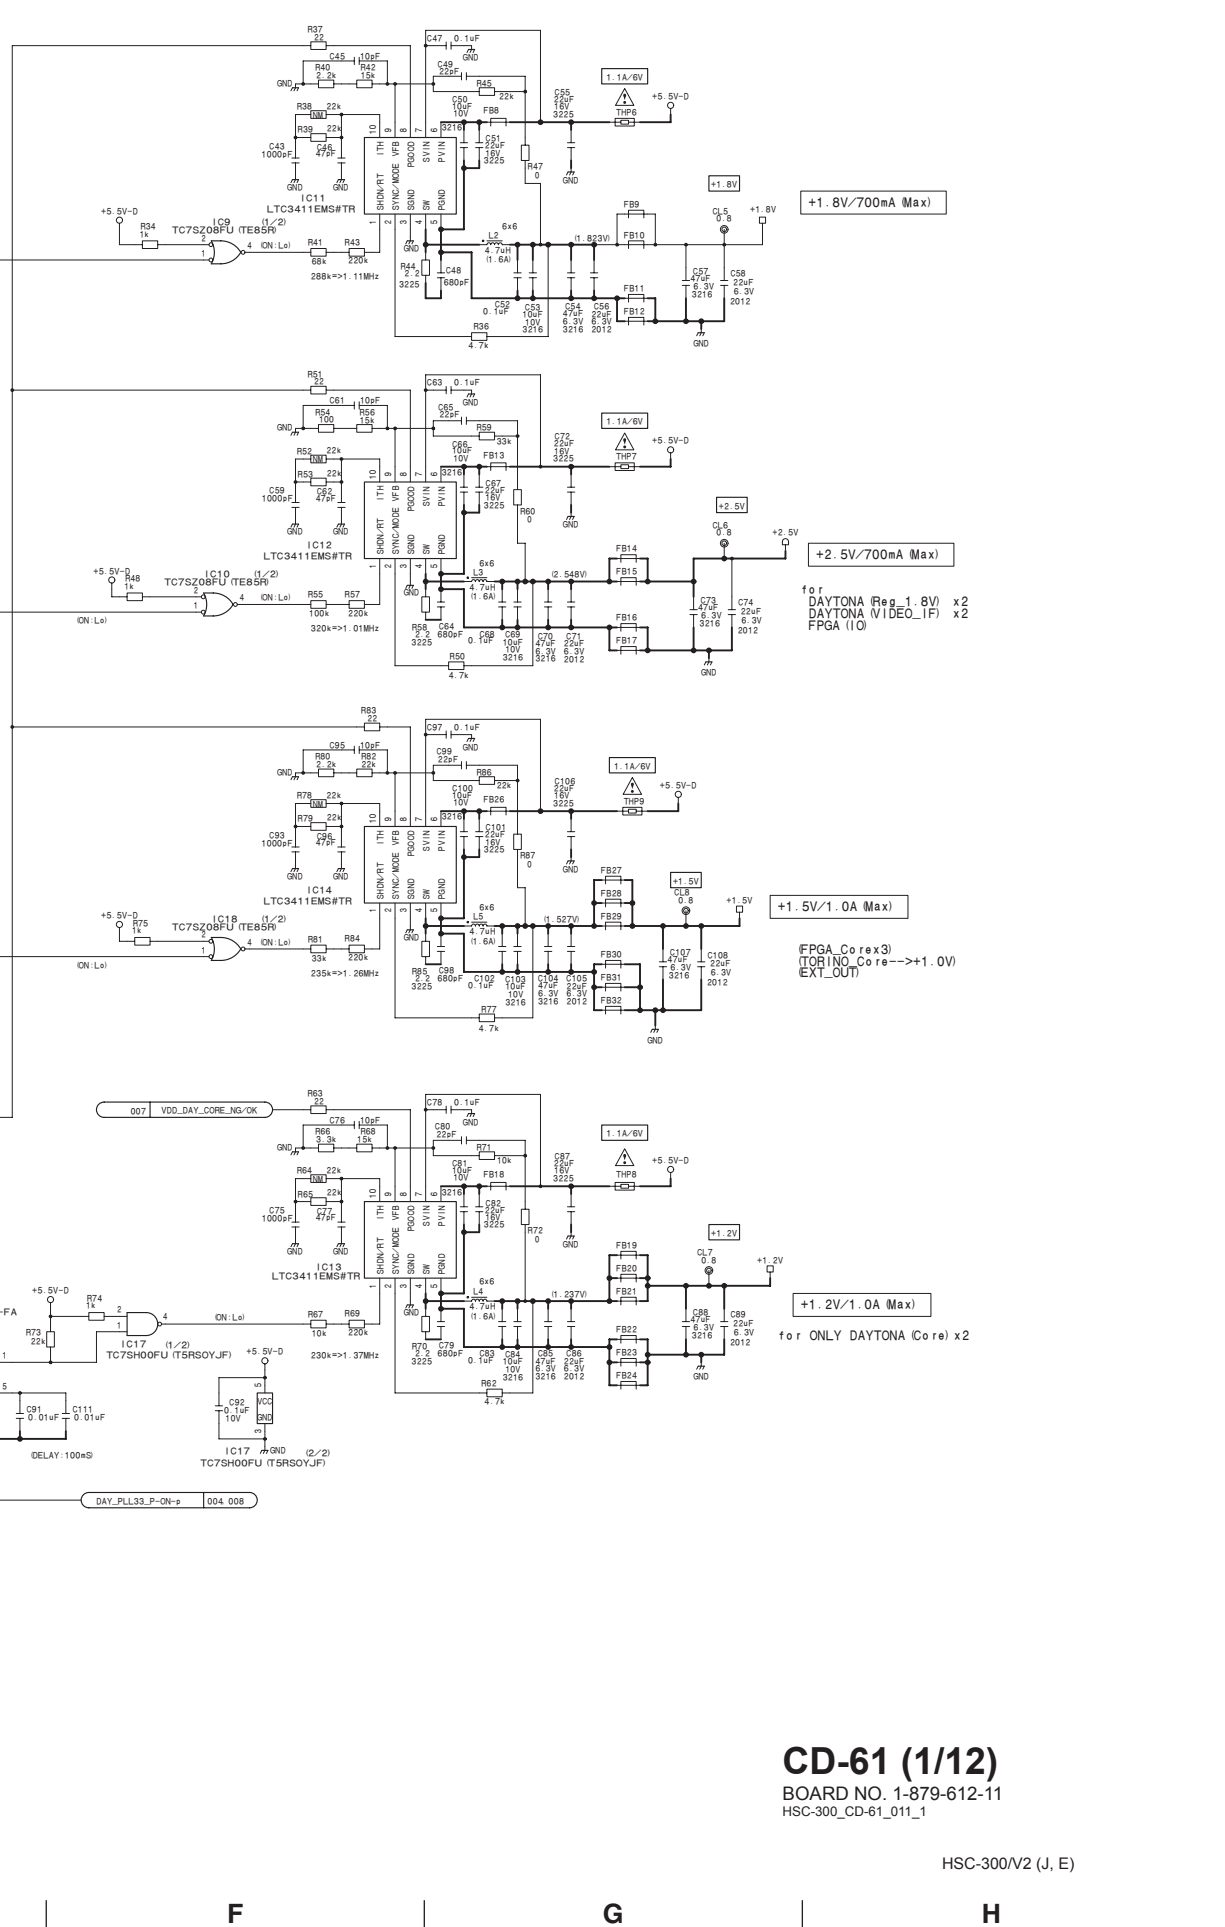


CN from/to TX-126

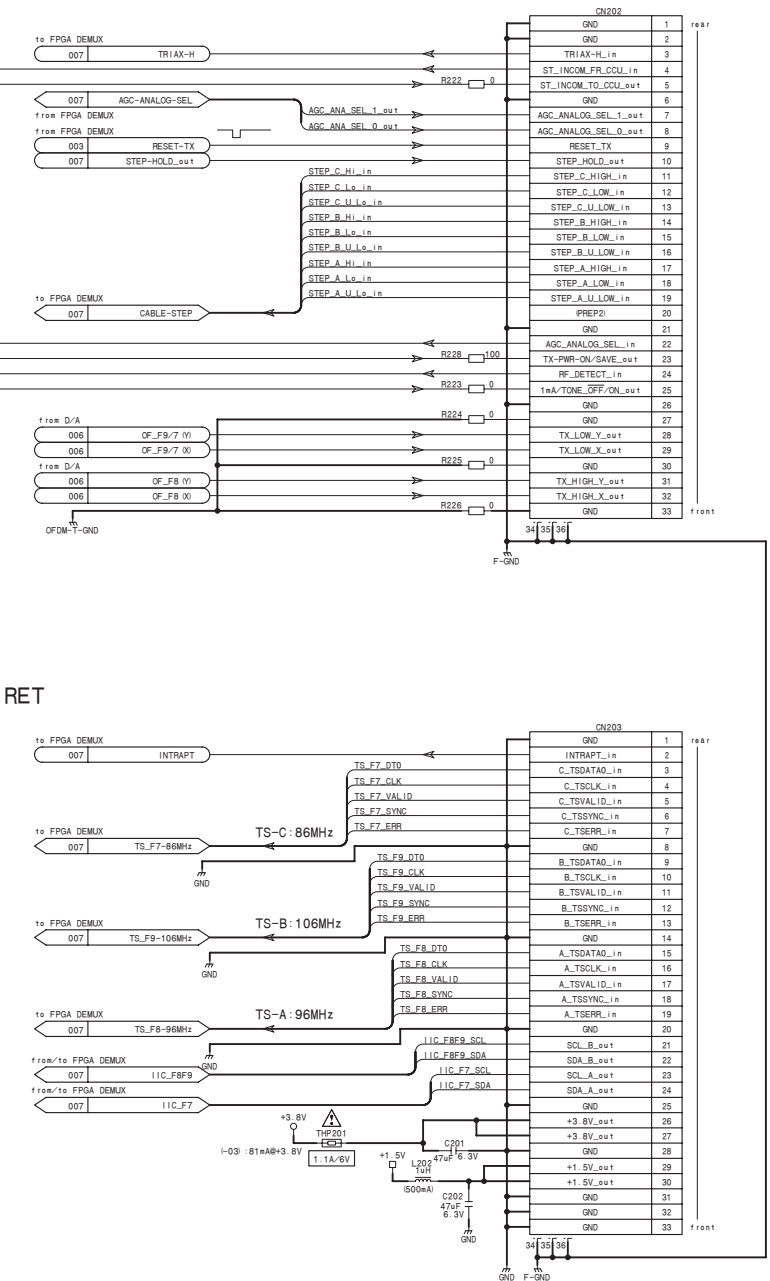

H

CPU_I/F

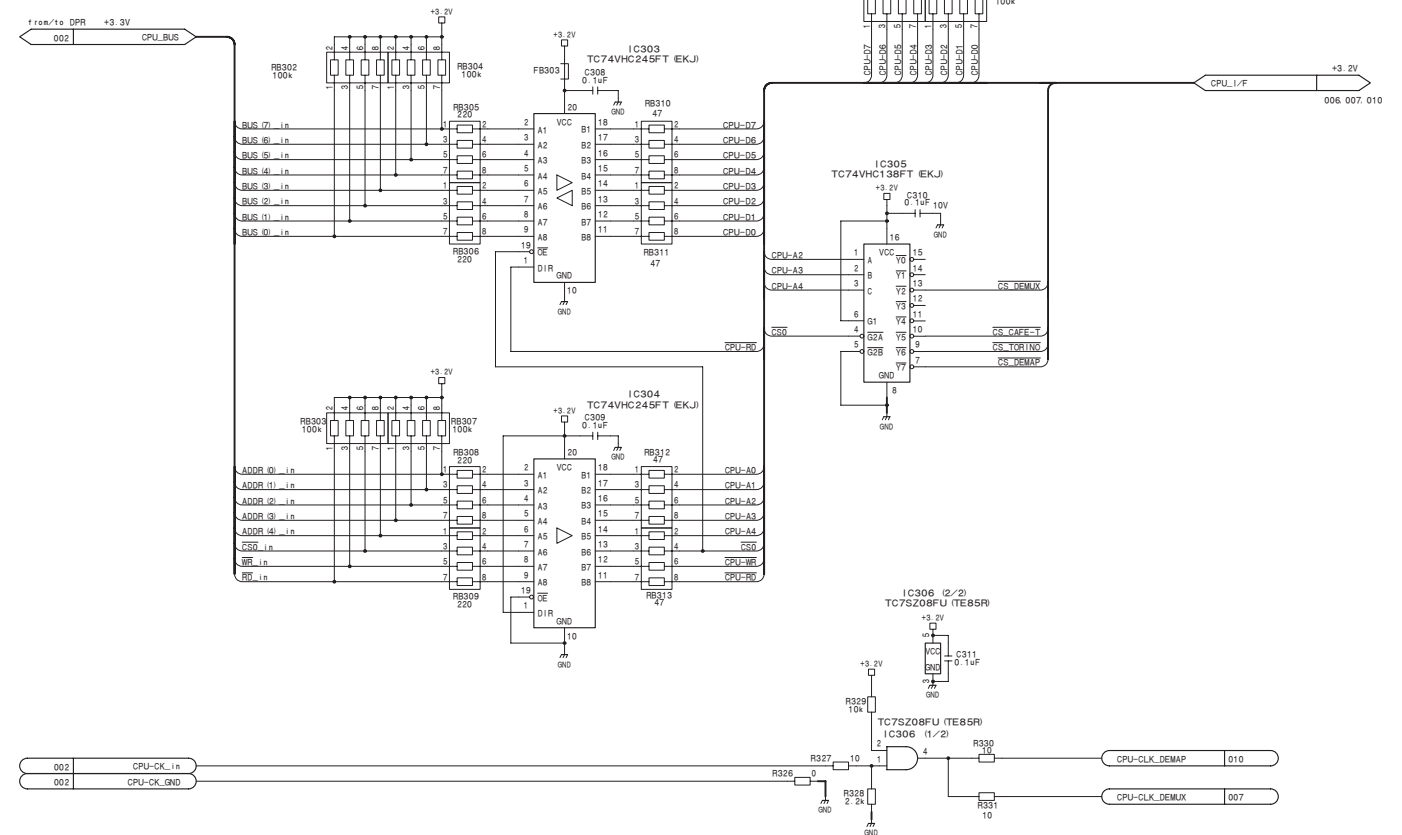




1


2

3


4





5

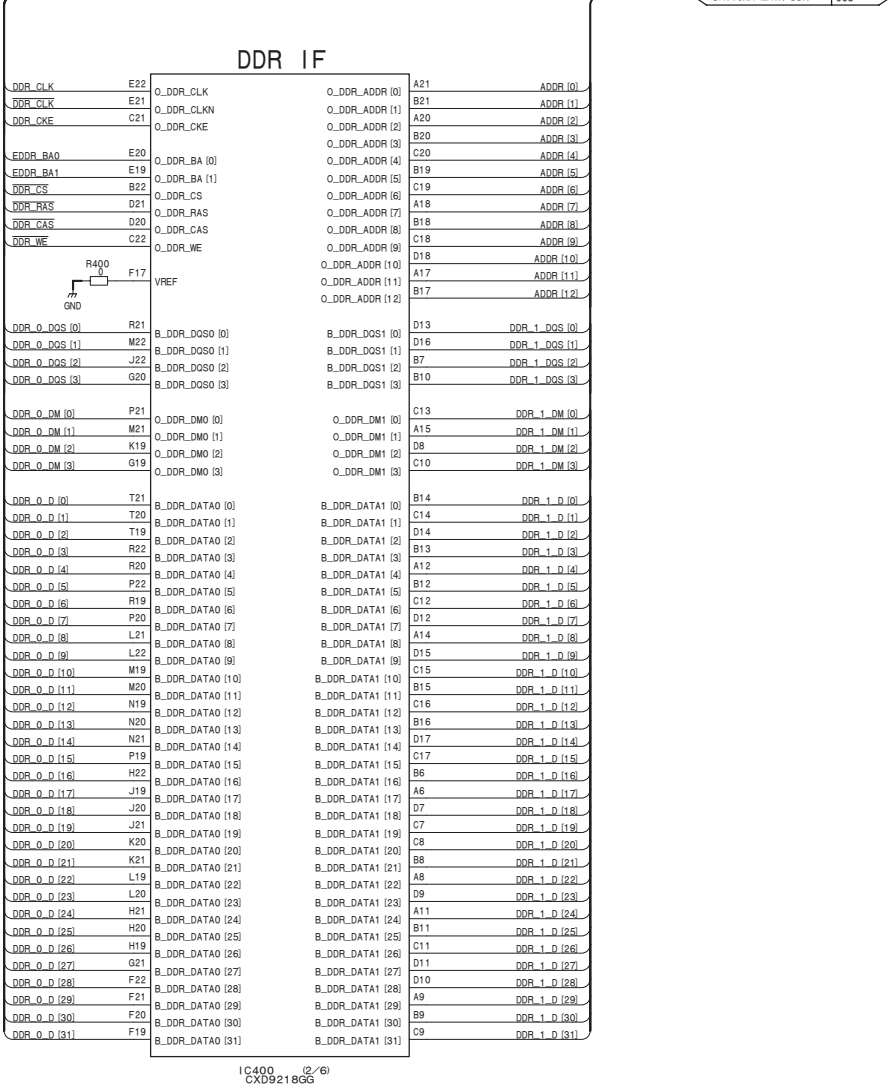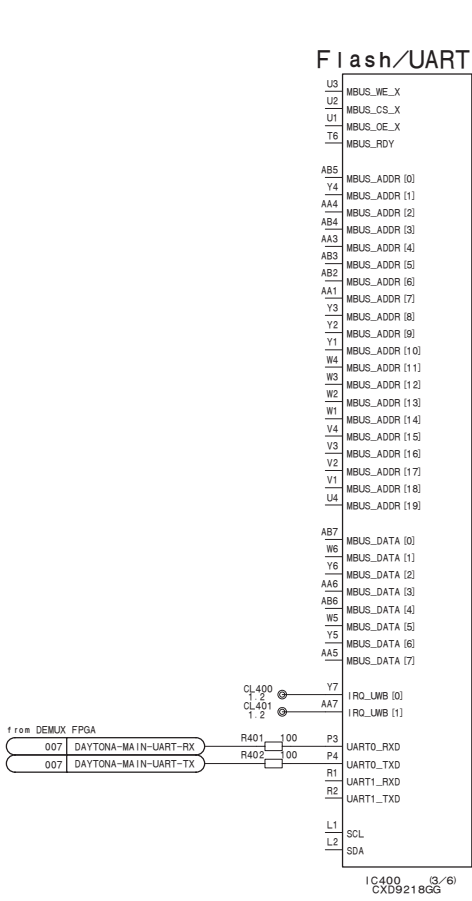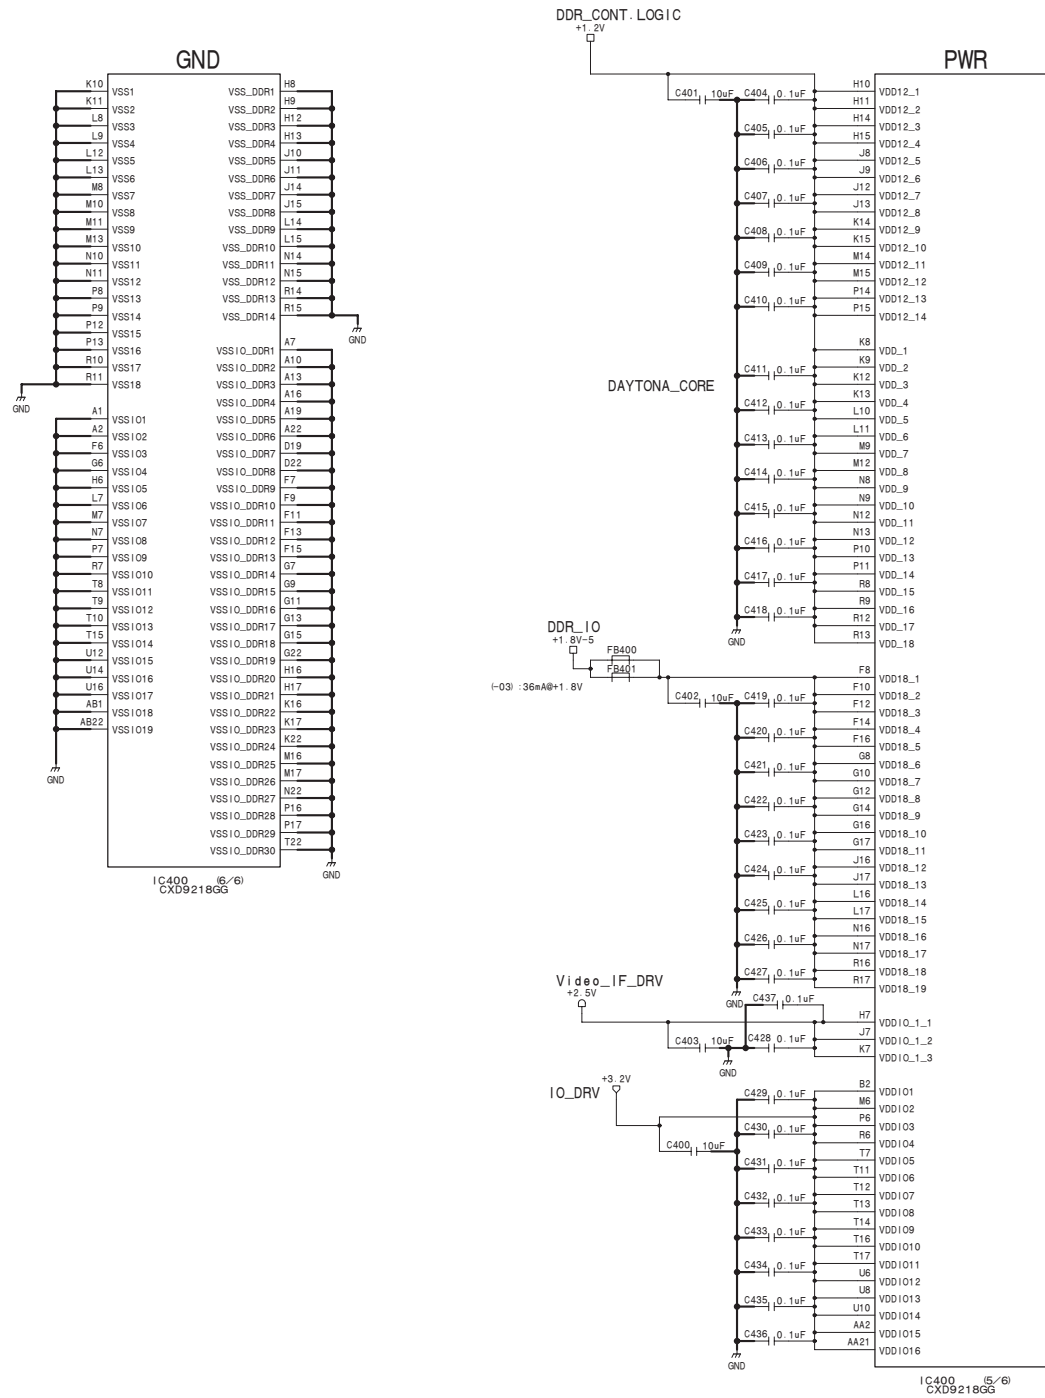


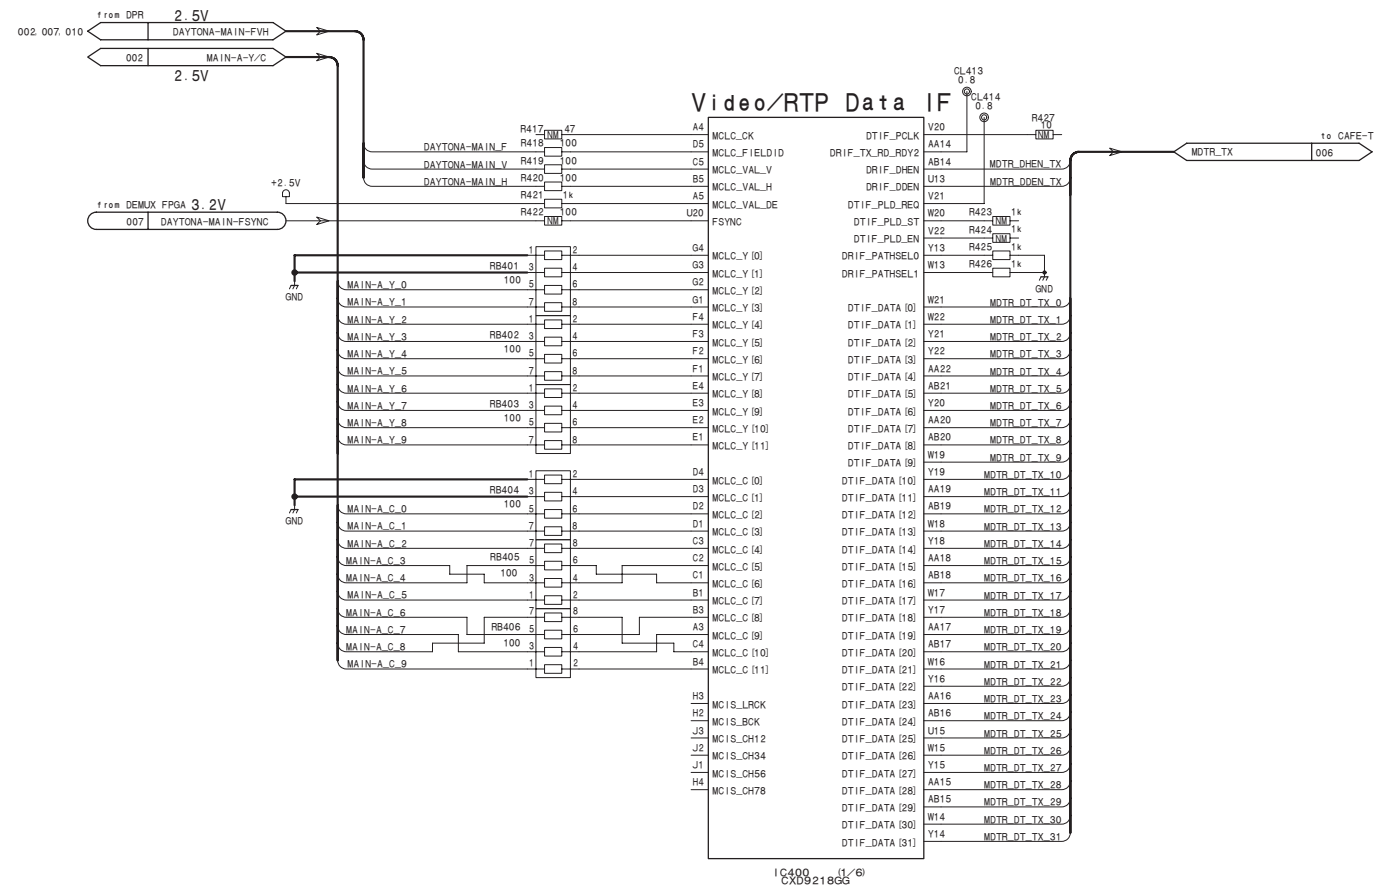





BOARD NO. 1-879-612-11
HSC-300_CD-61_011_4




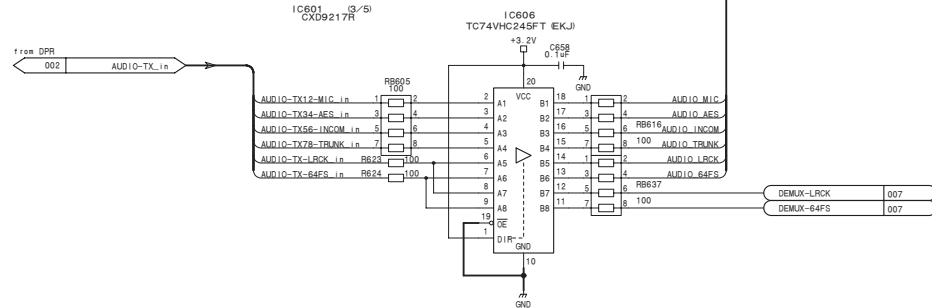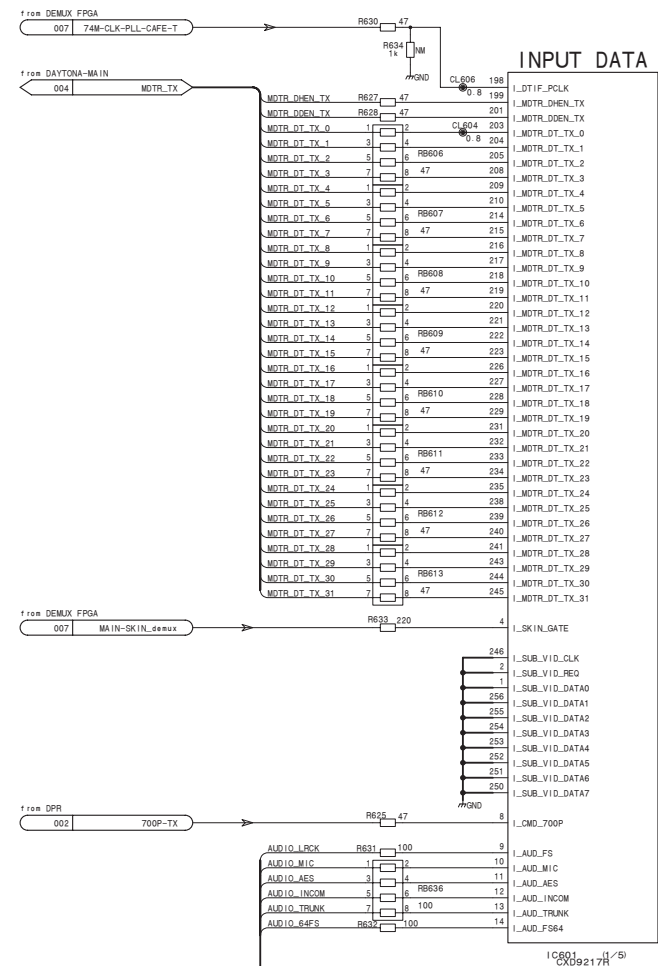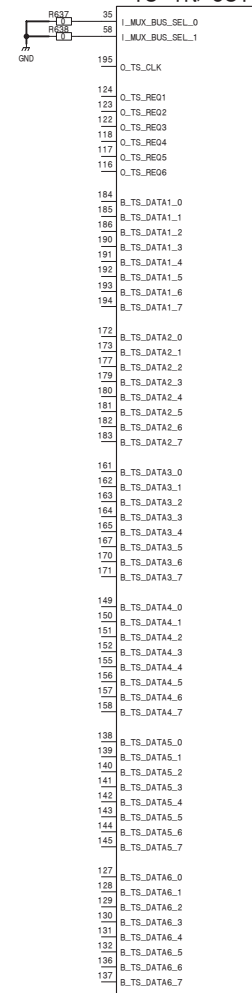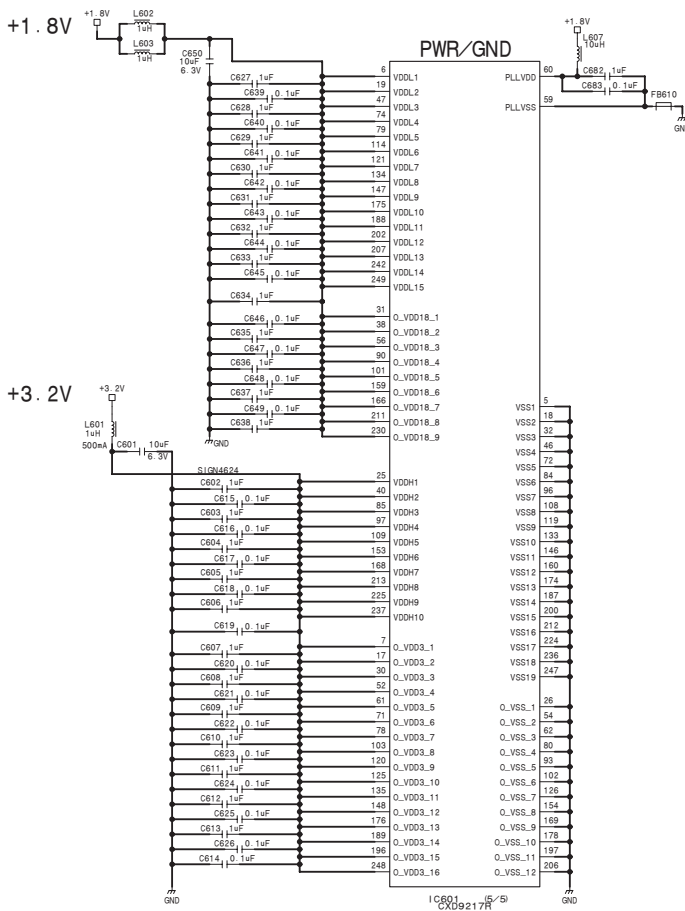

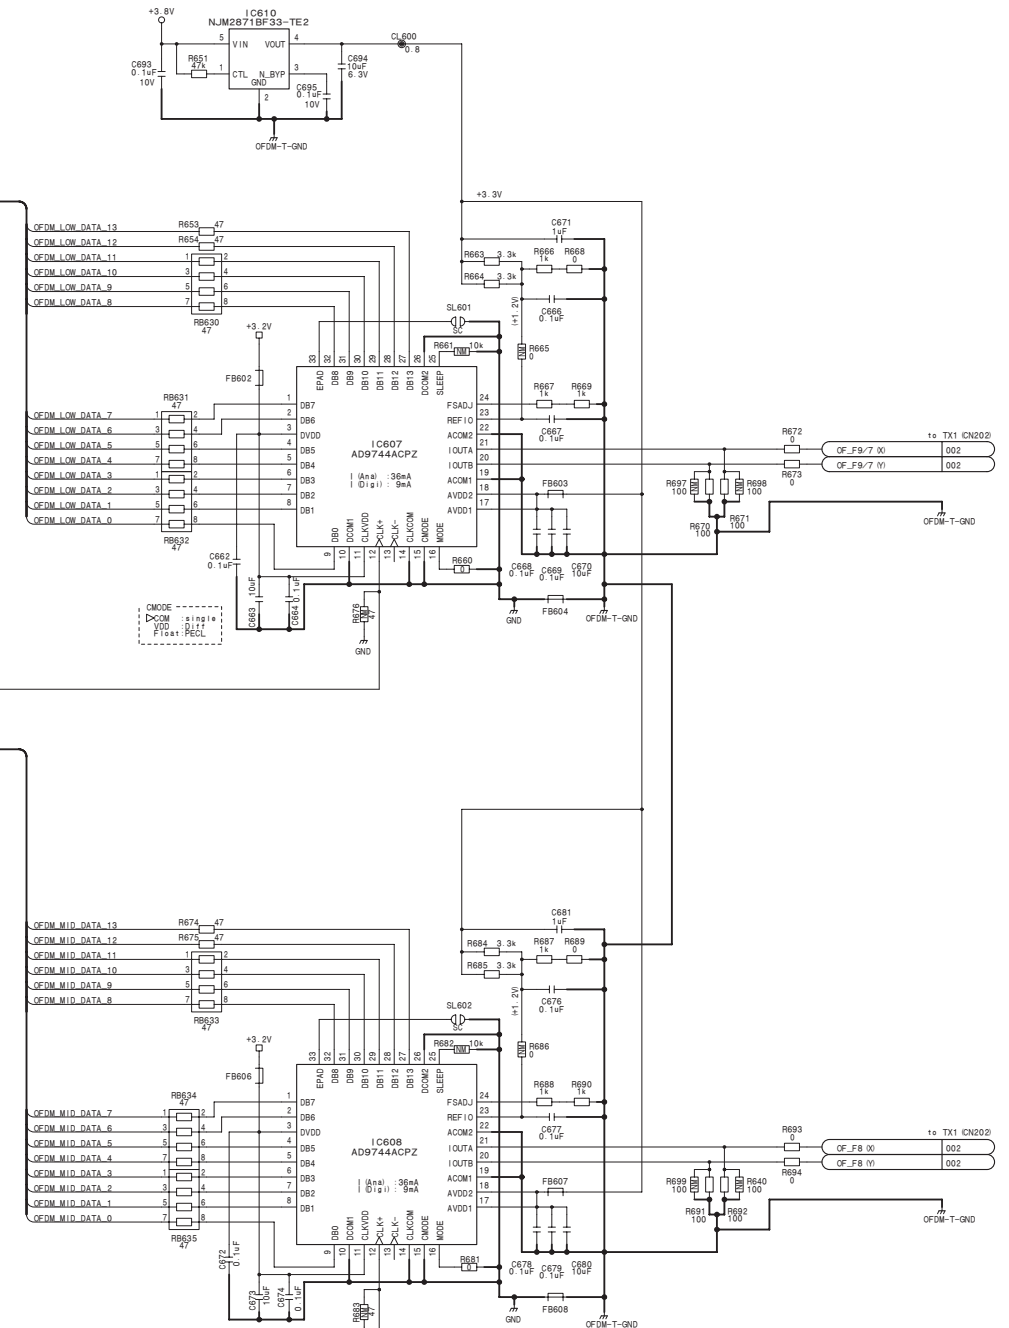

I	J	K	L	M	N	O	P
---	---	---	---	---	---	---	---

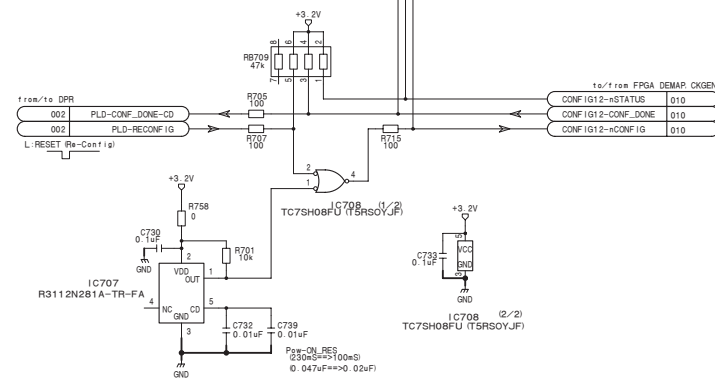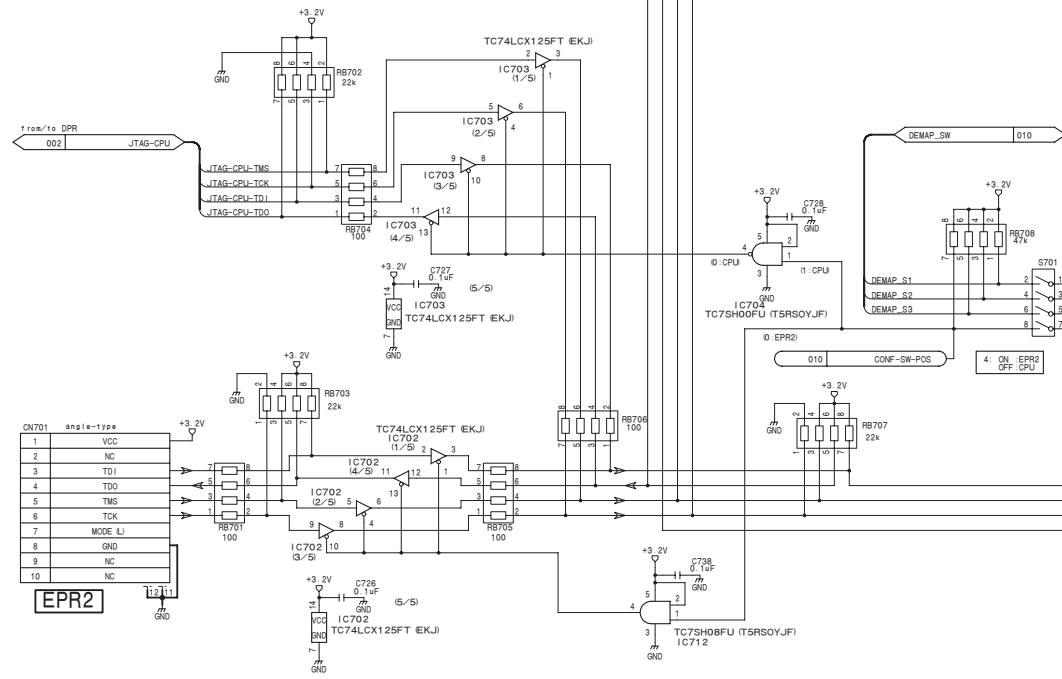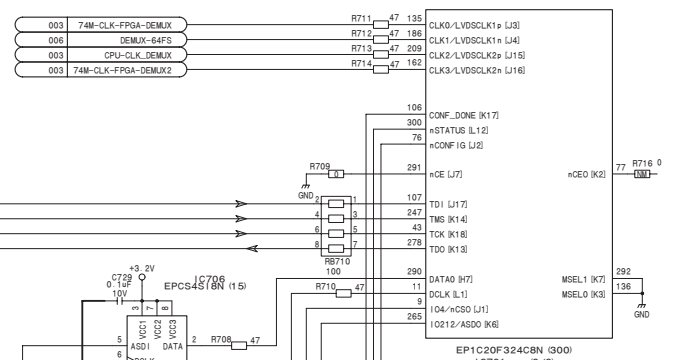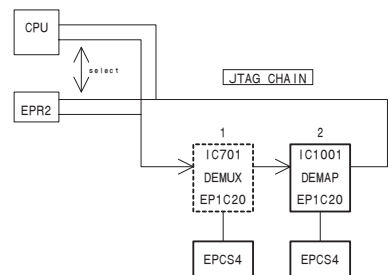






1



2


3

4


5

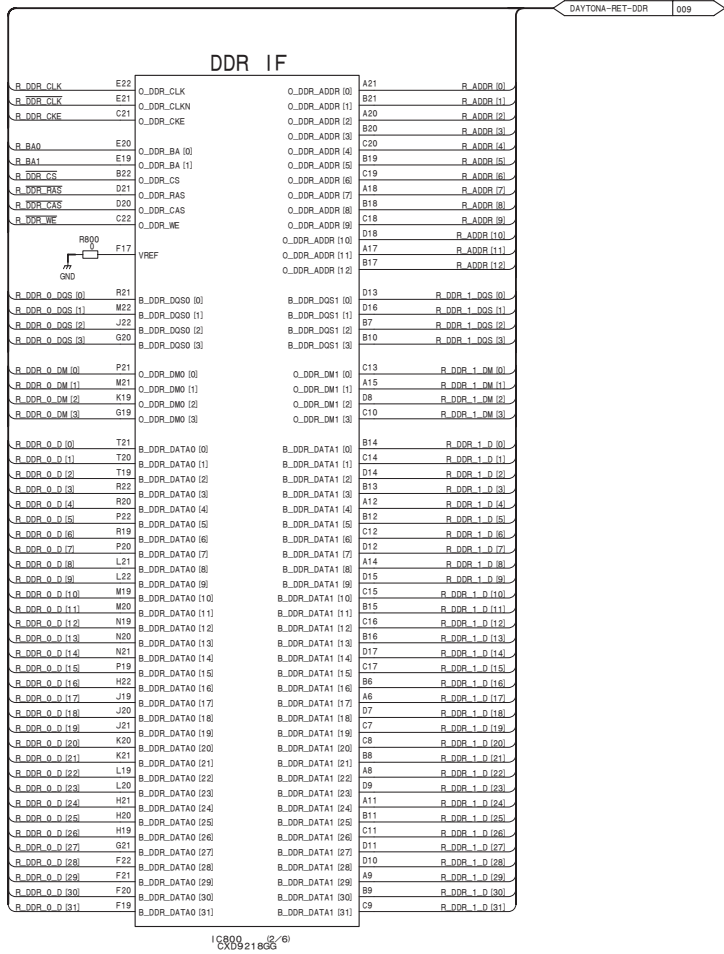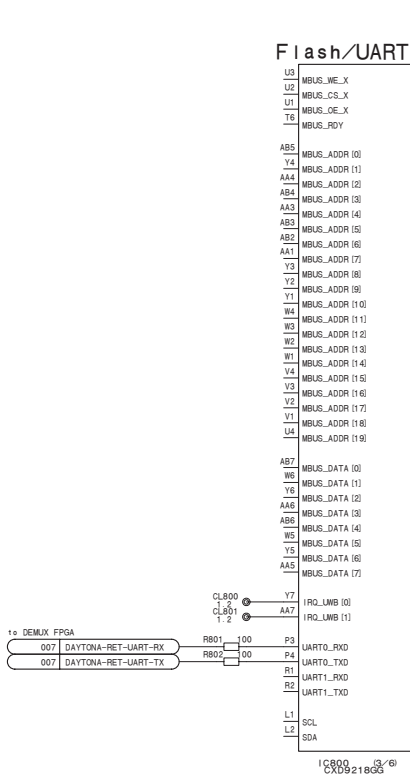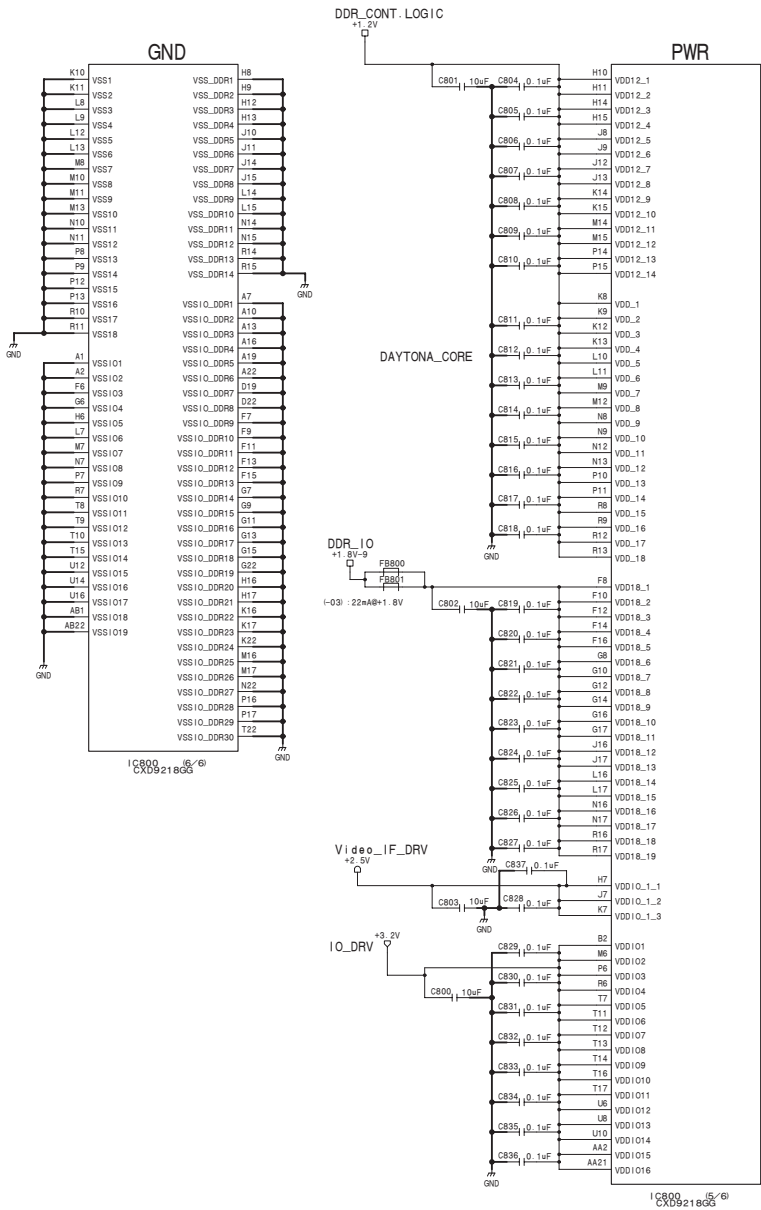


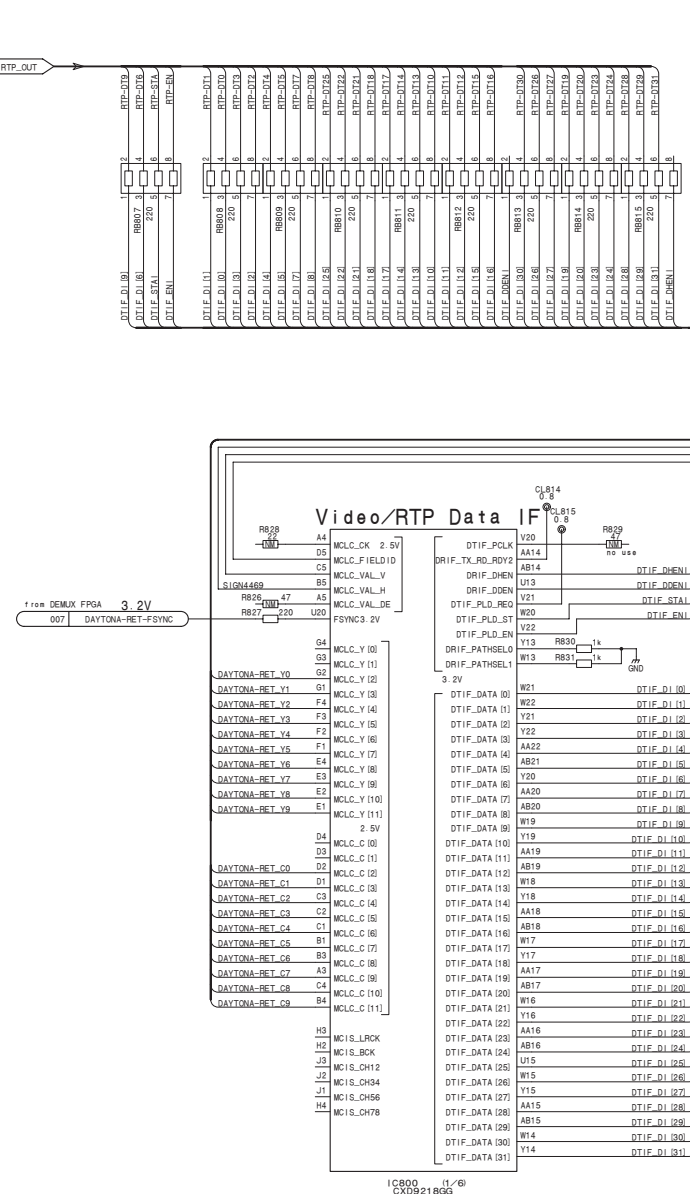




5

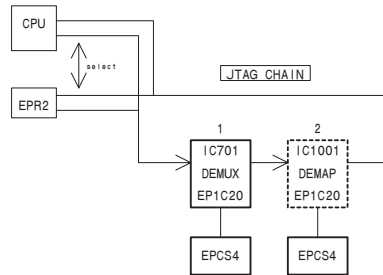


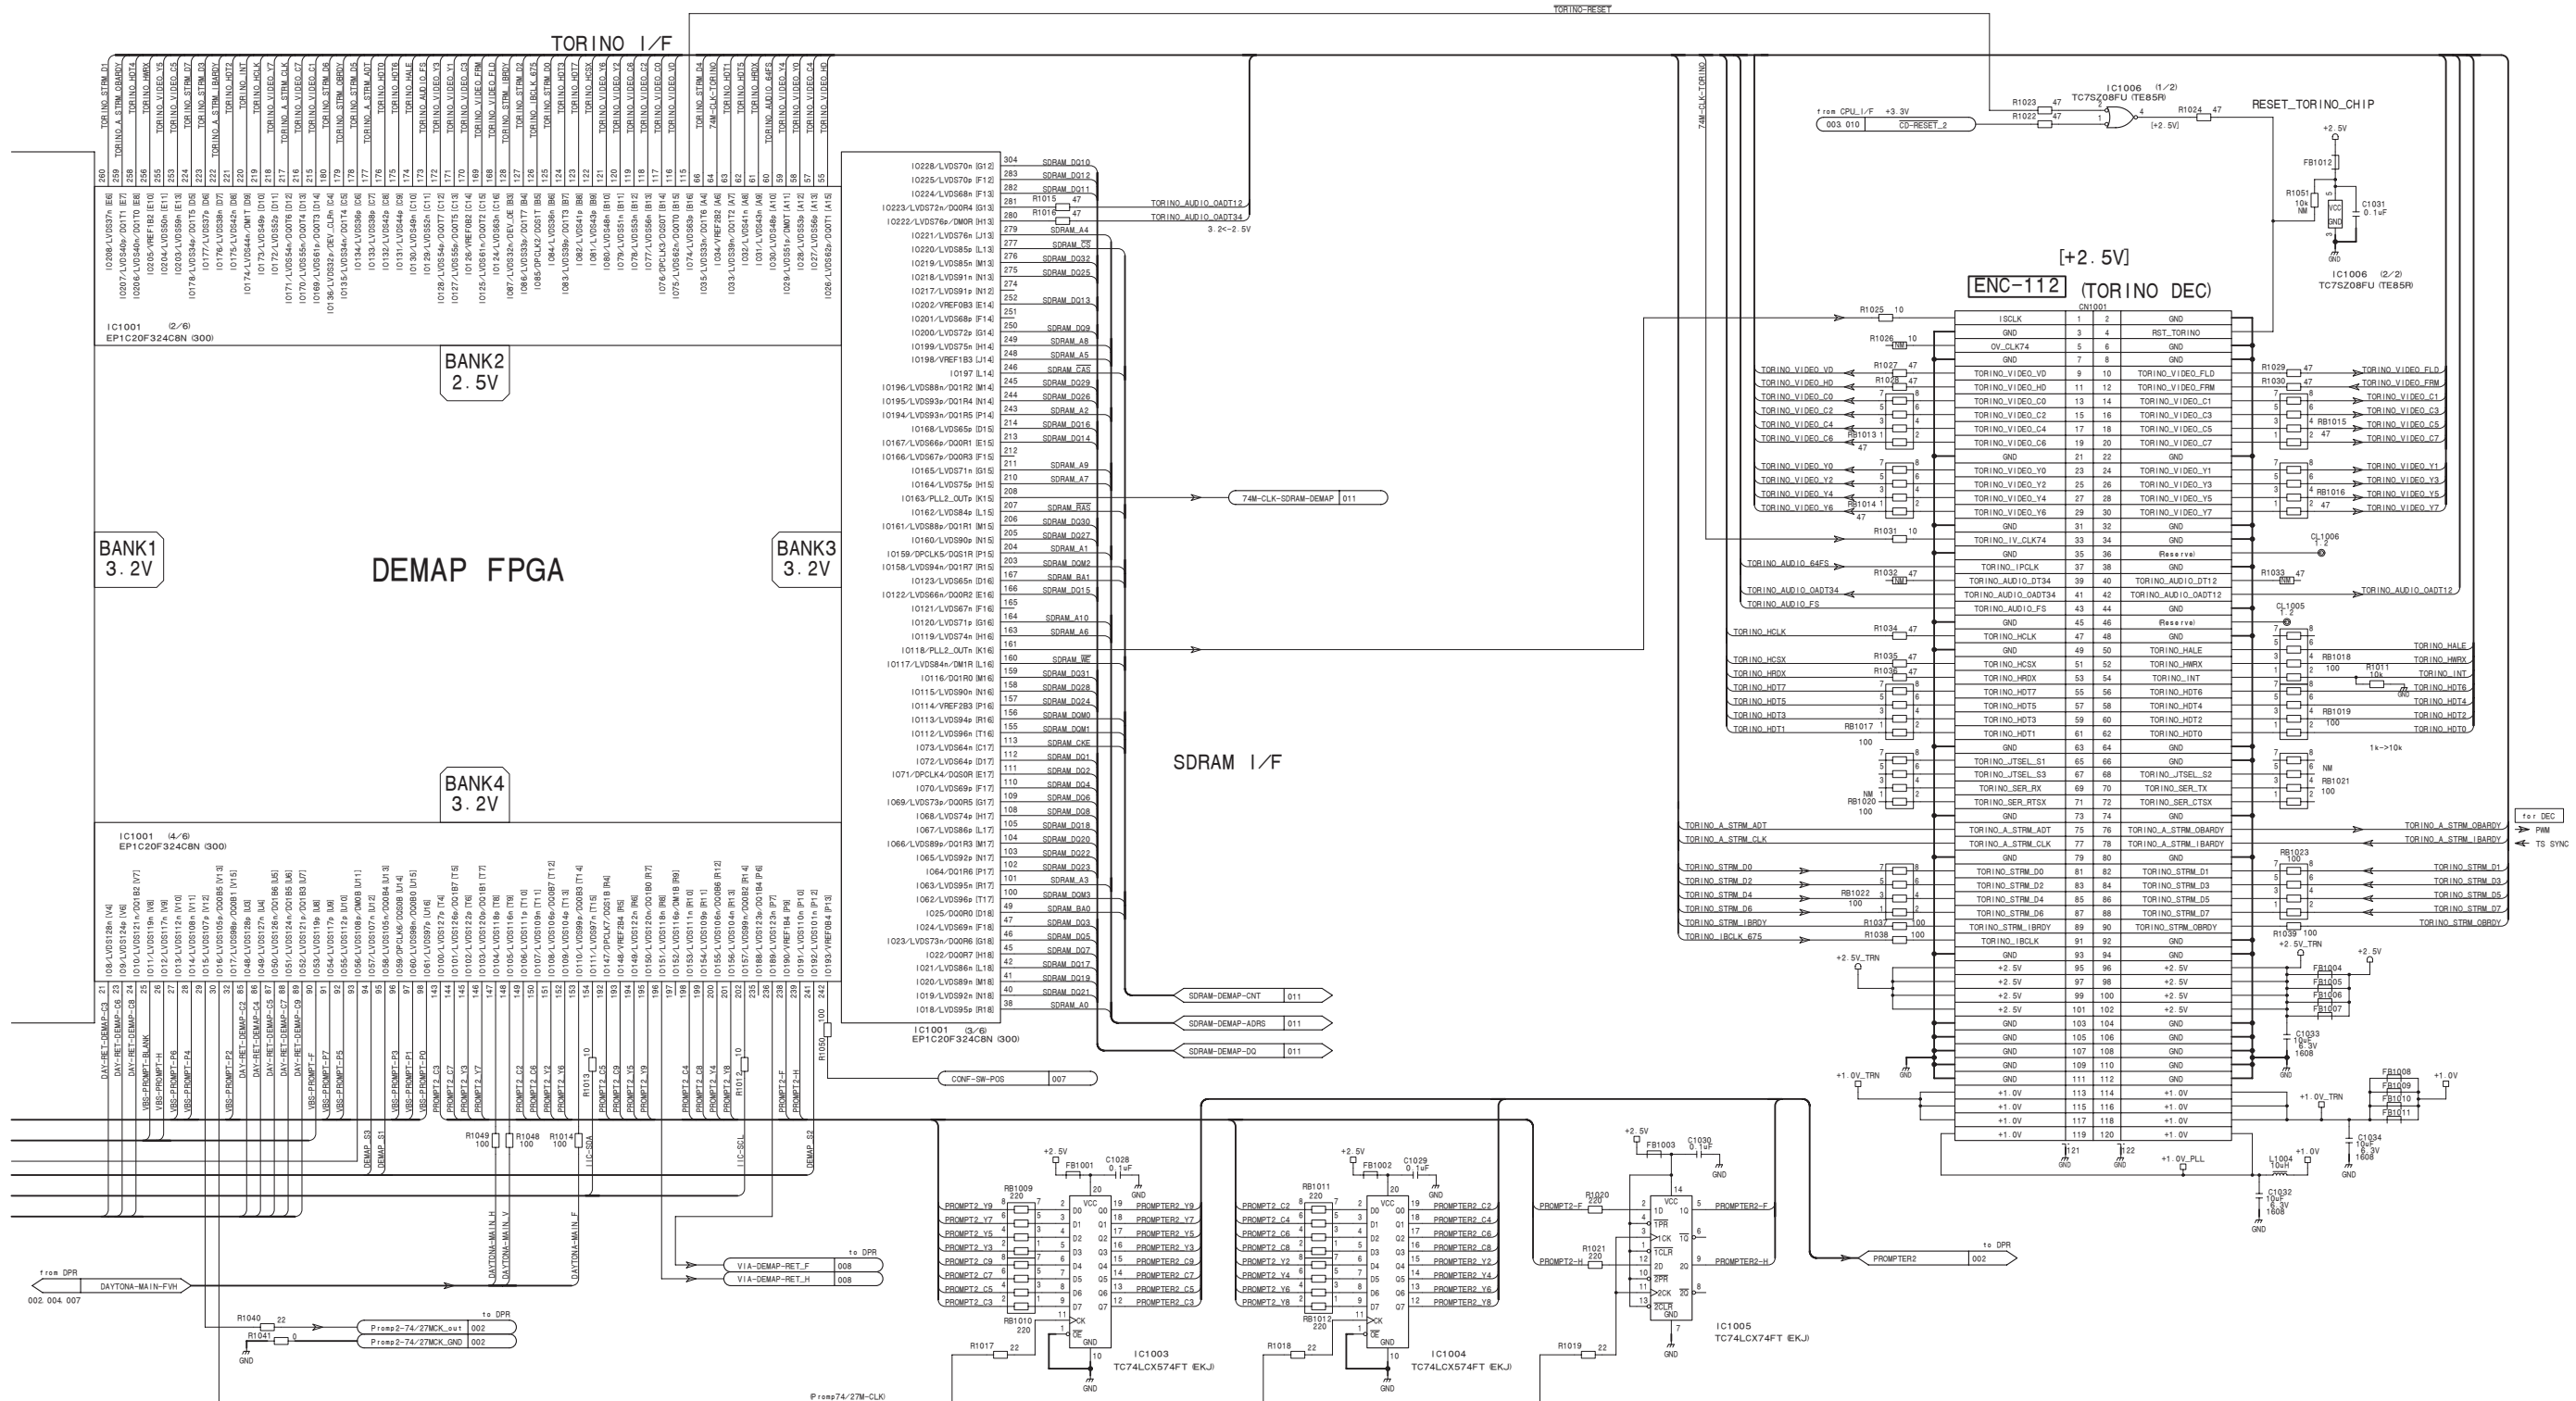

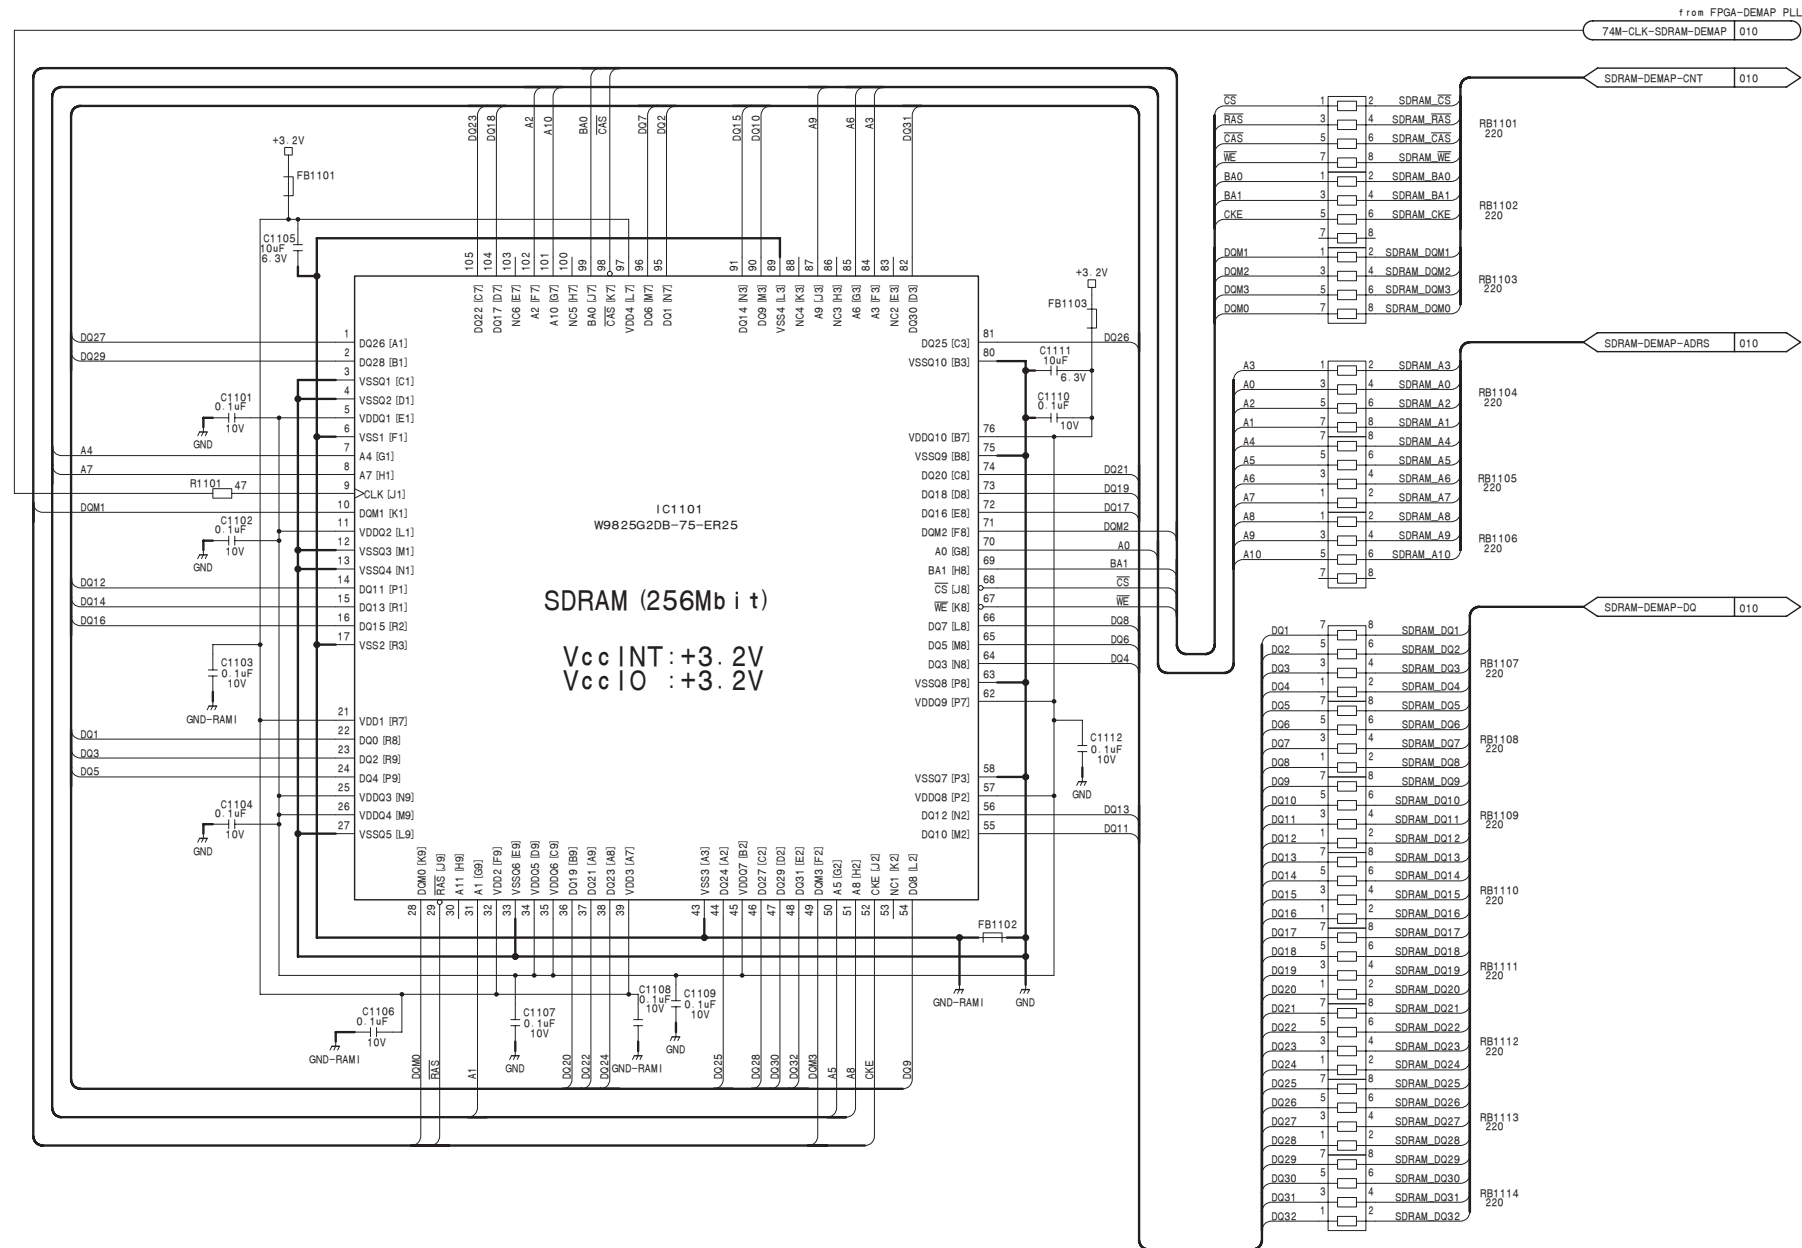

CD-61 (11/12)

BOARD NO. 1-879-612-11
HSC-300_CD-61_011_11

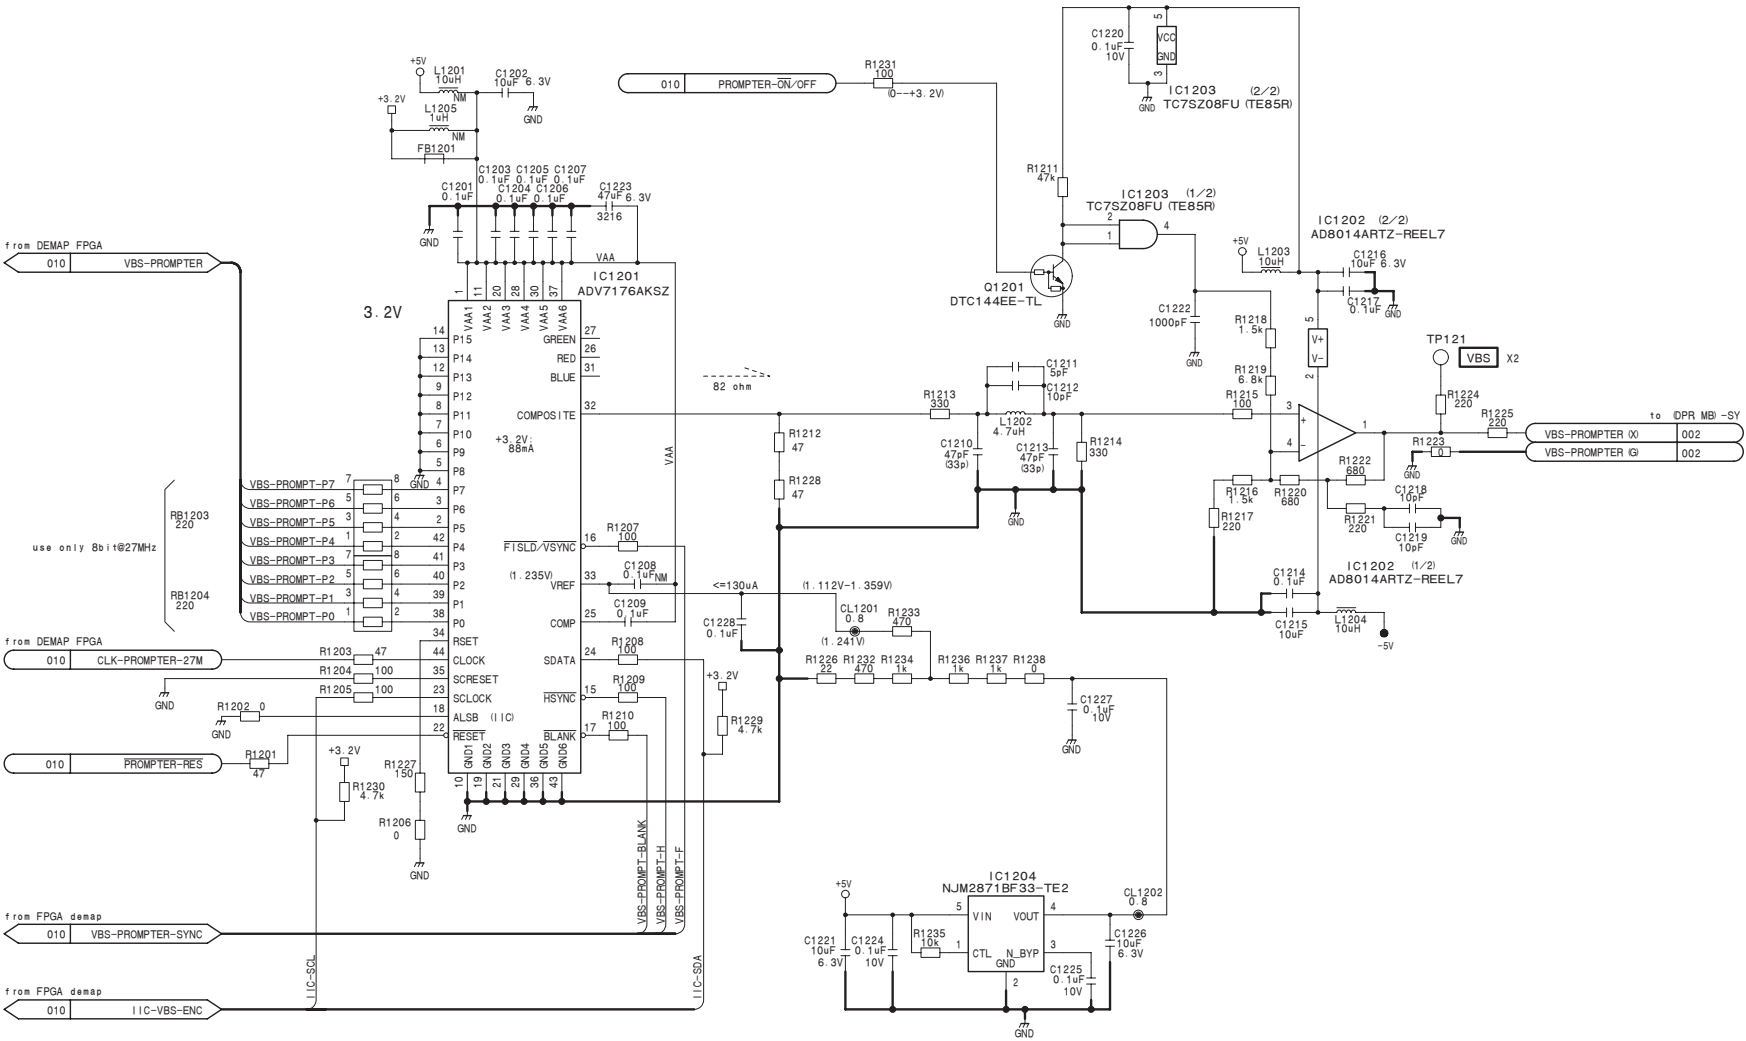

+3.2V
+5V
-5V

CD-61 (12/12)
BOARD NO. 1-879-612-11
HSC-300_CD-61_011_12



1

2

3

4

5

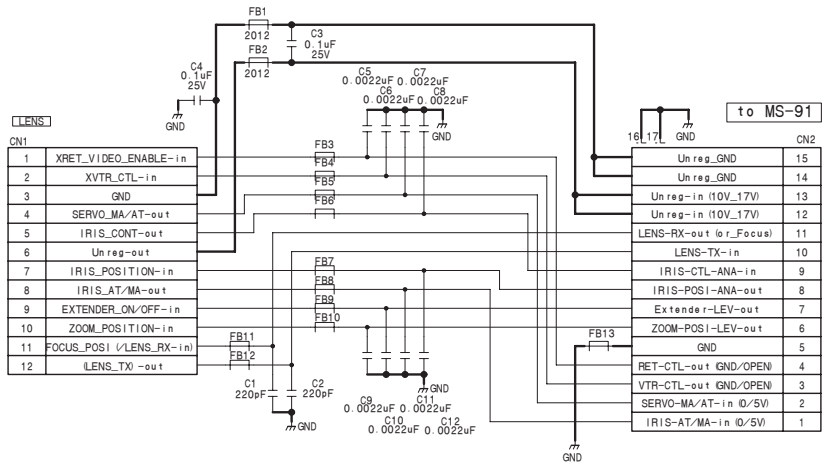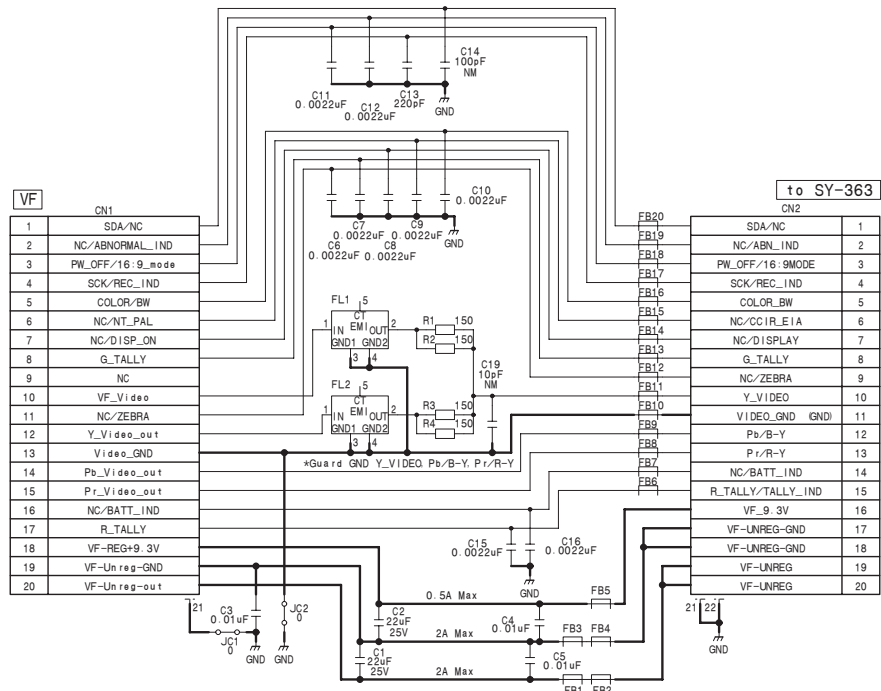


CN-3069

BOARD NO. 1-879-607-11
HSC-300_CN-3069_011_1


CN-3070

BOARD NO. 1-879-608-11
HSC-300_CN-3070_011_1

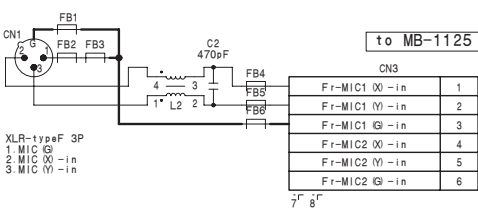


CN-3071

BOARD NO. 1-879-609-11
HSC-300_CN-3071_011_1

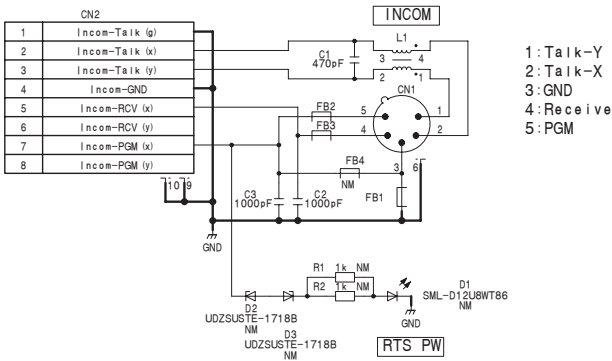


CN-3072

BOARD NO. 1-879-611-11
HSC-300_CN-3072_011_1

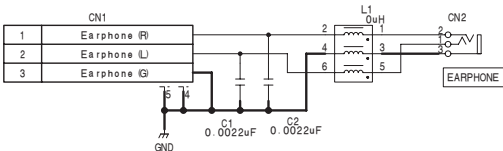


CN-3073

BOARD NO. 1-879-596-11
HSC-300_CN-3073_011_1

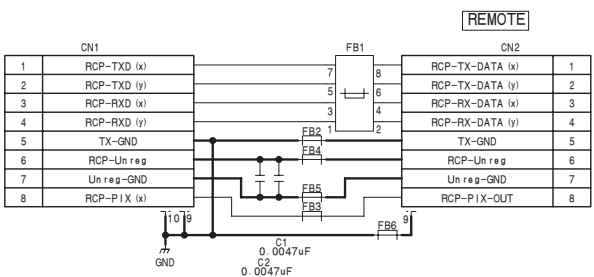



CN-3074

BOARD NO. 1-879-597-11
HSC-300_CN-3074_011_1

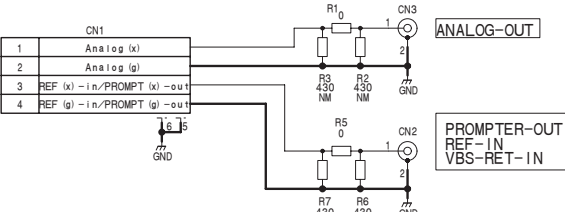


CN-3075

BOARD NO. 1-879-598-11
HSC-300_CN-3075_011_1

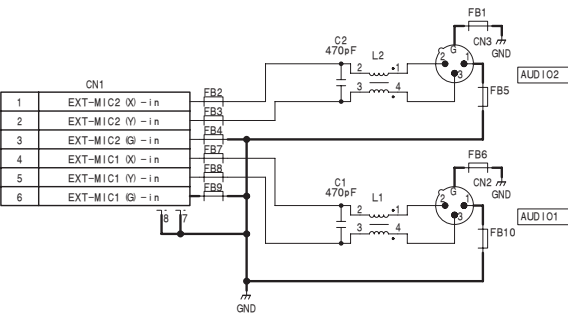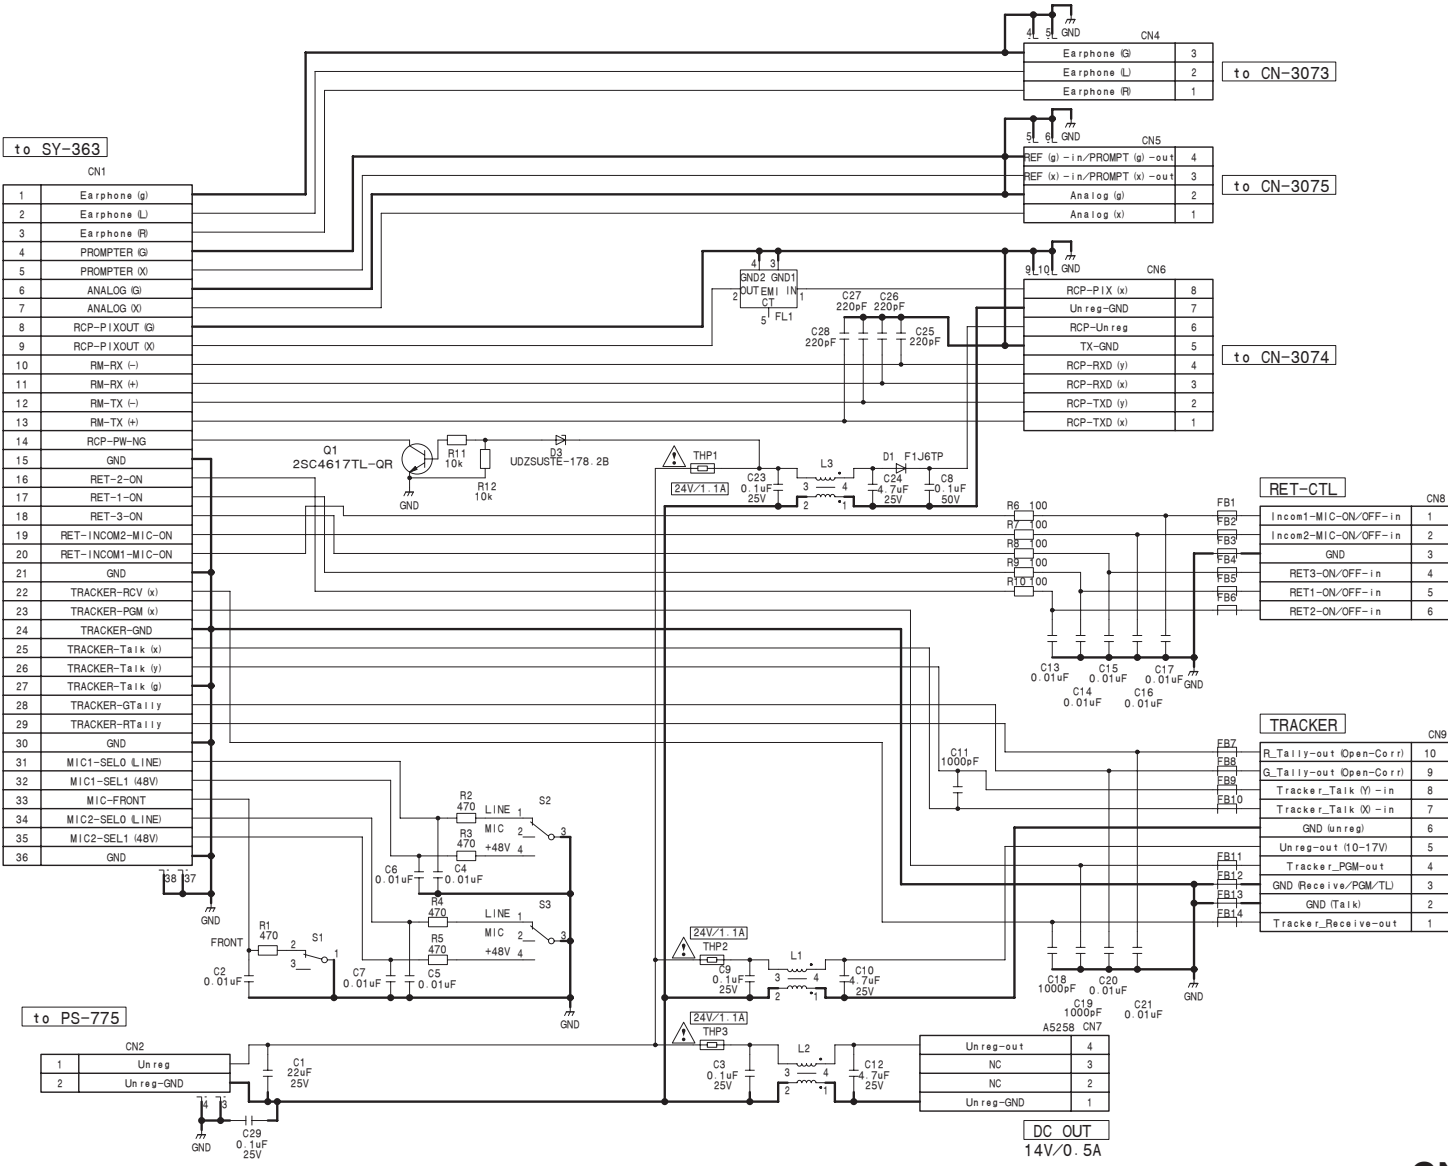


CN-3077
BOARD NO. 1-879-600-11
HSC-300_CN-3077_011_1



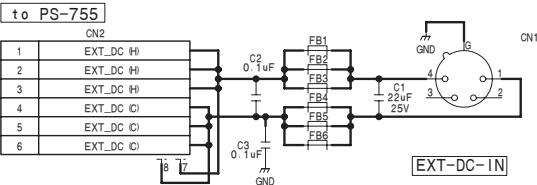


CN-3078
BOARD NO. 1-879-613-11
HSC-300_CN-3078_011_1

CN-3076
BOARD NO. 1-879-599-11
HSC-300_CN-3076_011_1

CN101	159	+3.8V	
CN101	161	+3.8V	
CN101	163	+3.8V	
CN101	165	+3.8V	
CN101	167	+3.8V	
CN101	171	GND	
CN101	173	GND	
CN101	175	GND	
CN101	177	GND	
CN101	179	GND	




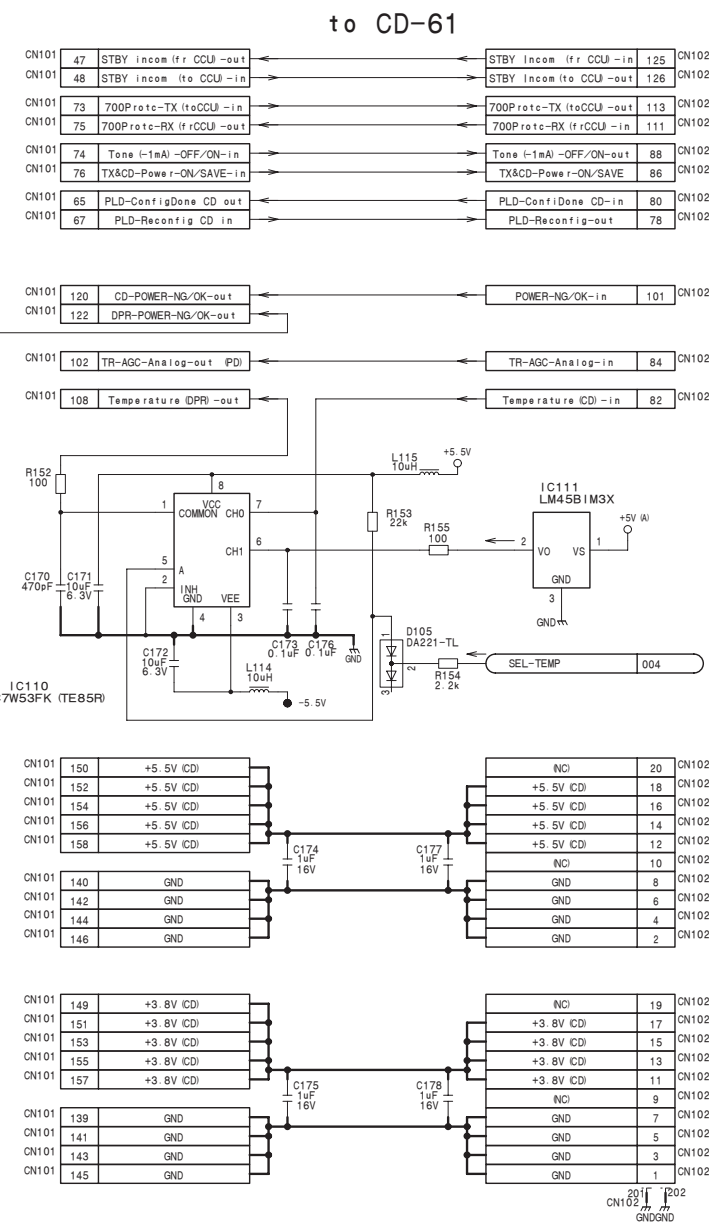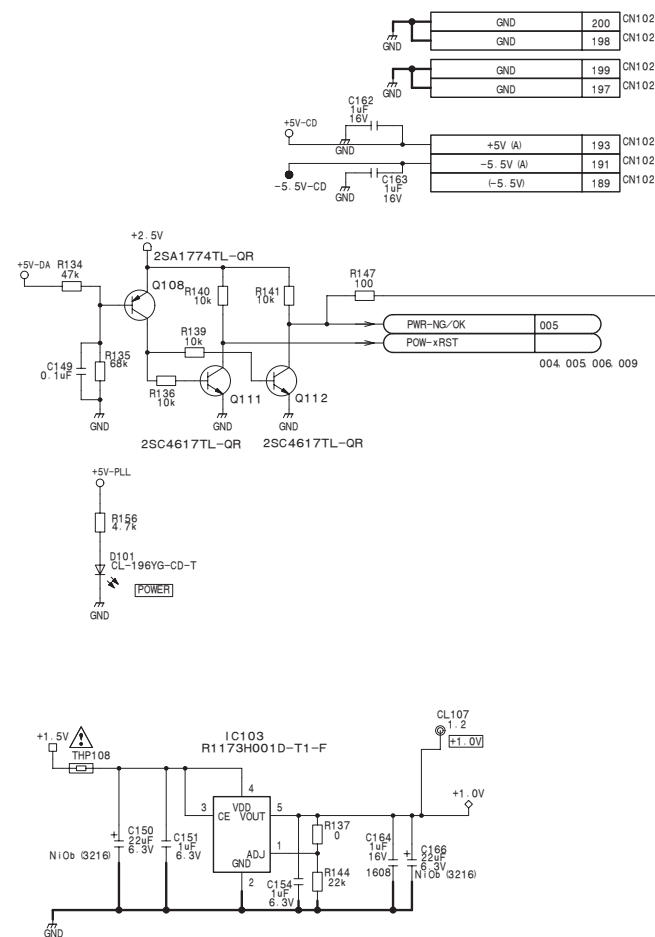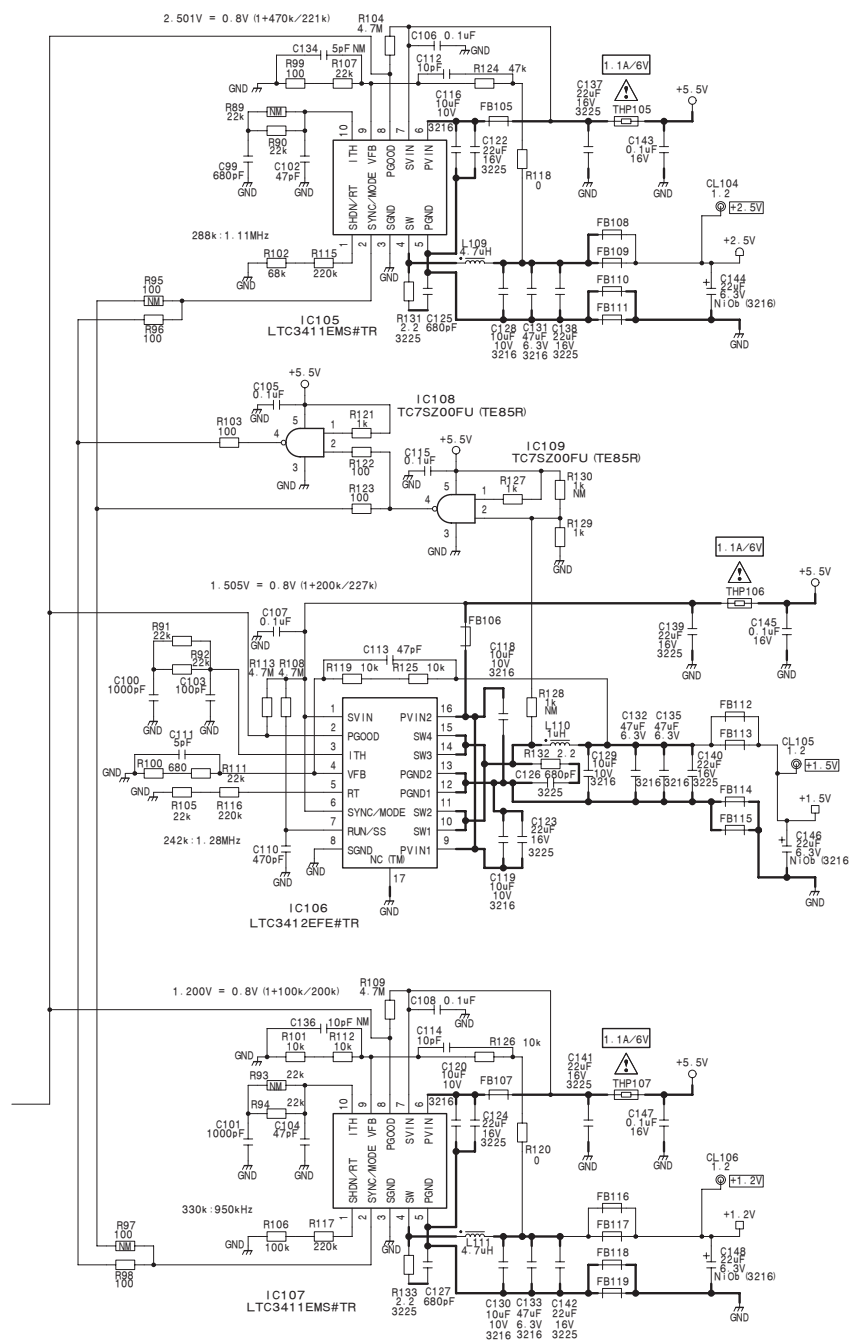

DPR-298 (1/9)

BOARD NO. 1-879-603-11
HSC-300_DPR-298_011_1




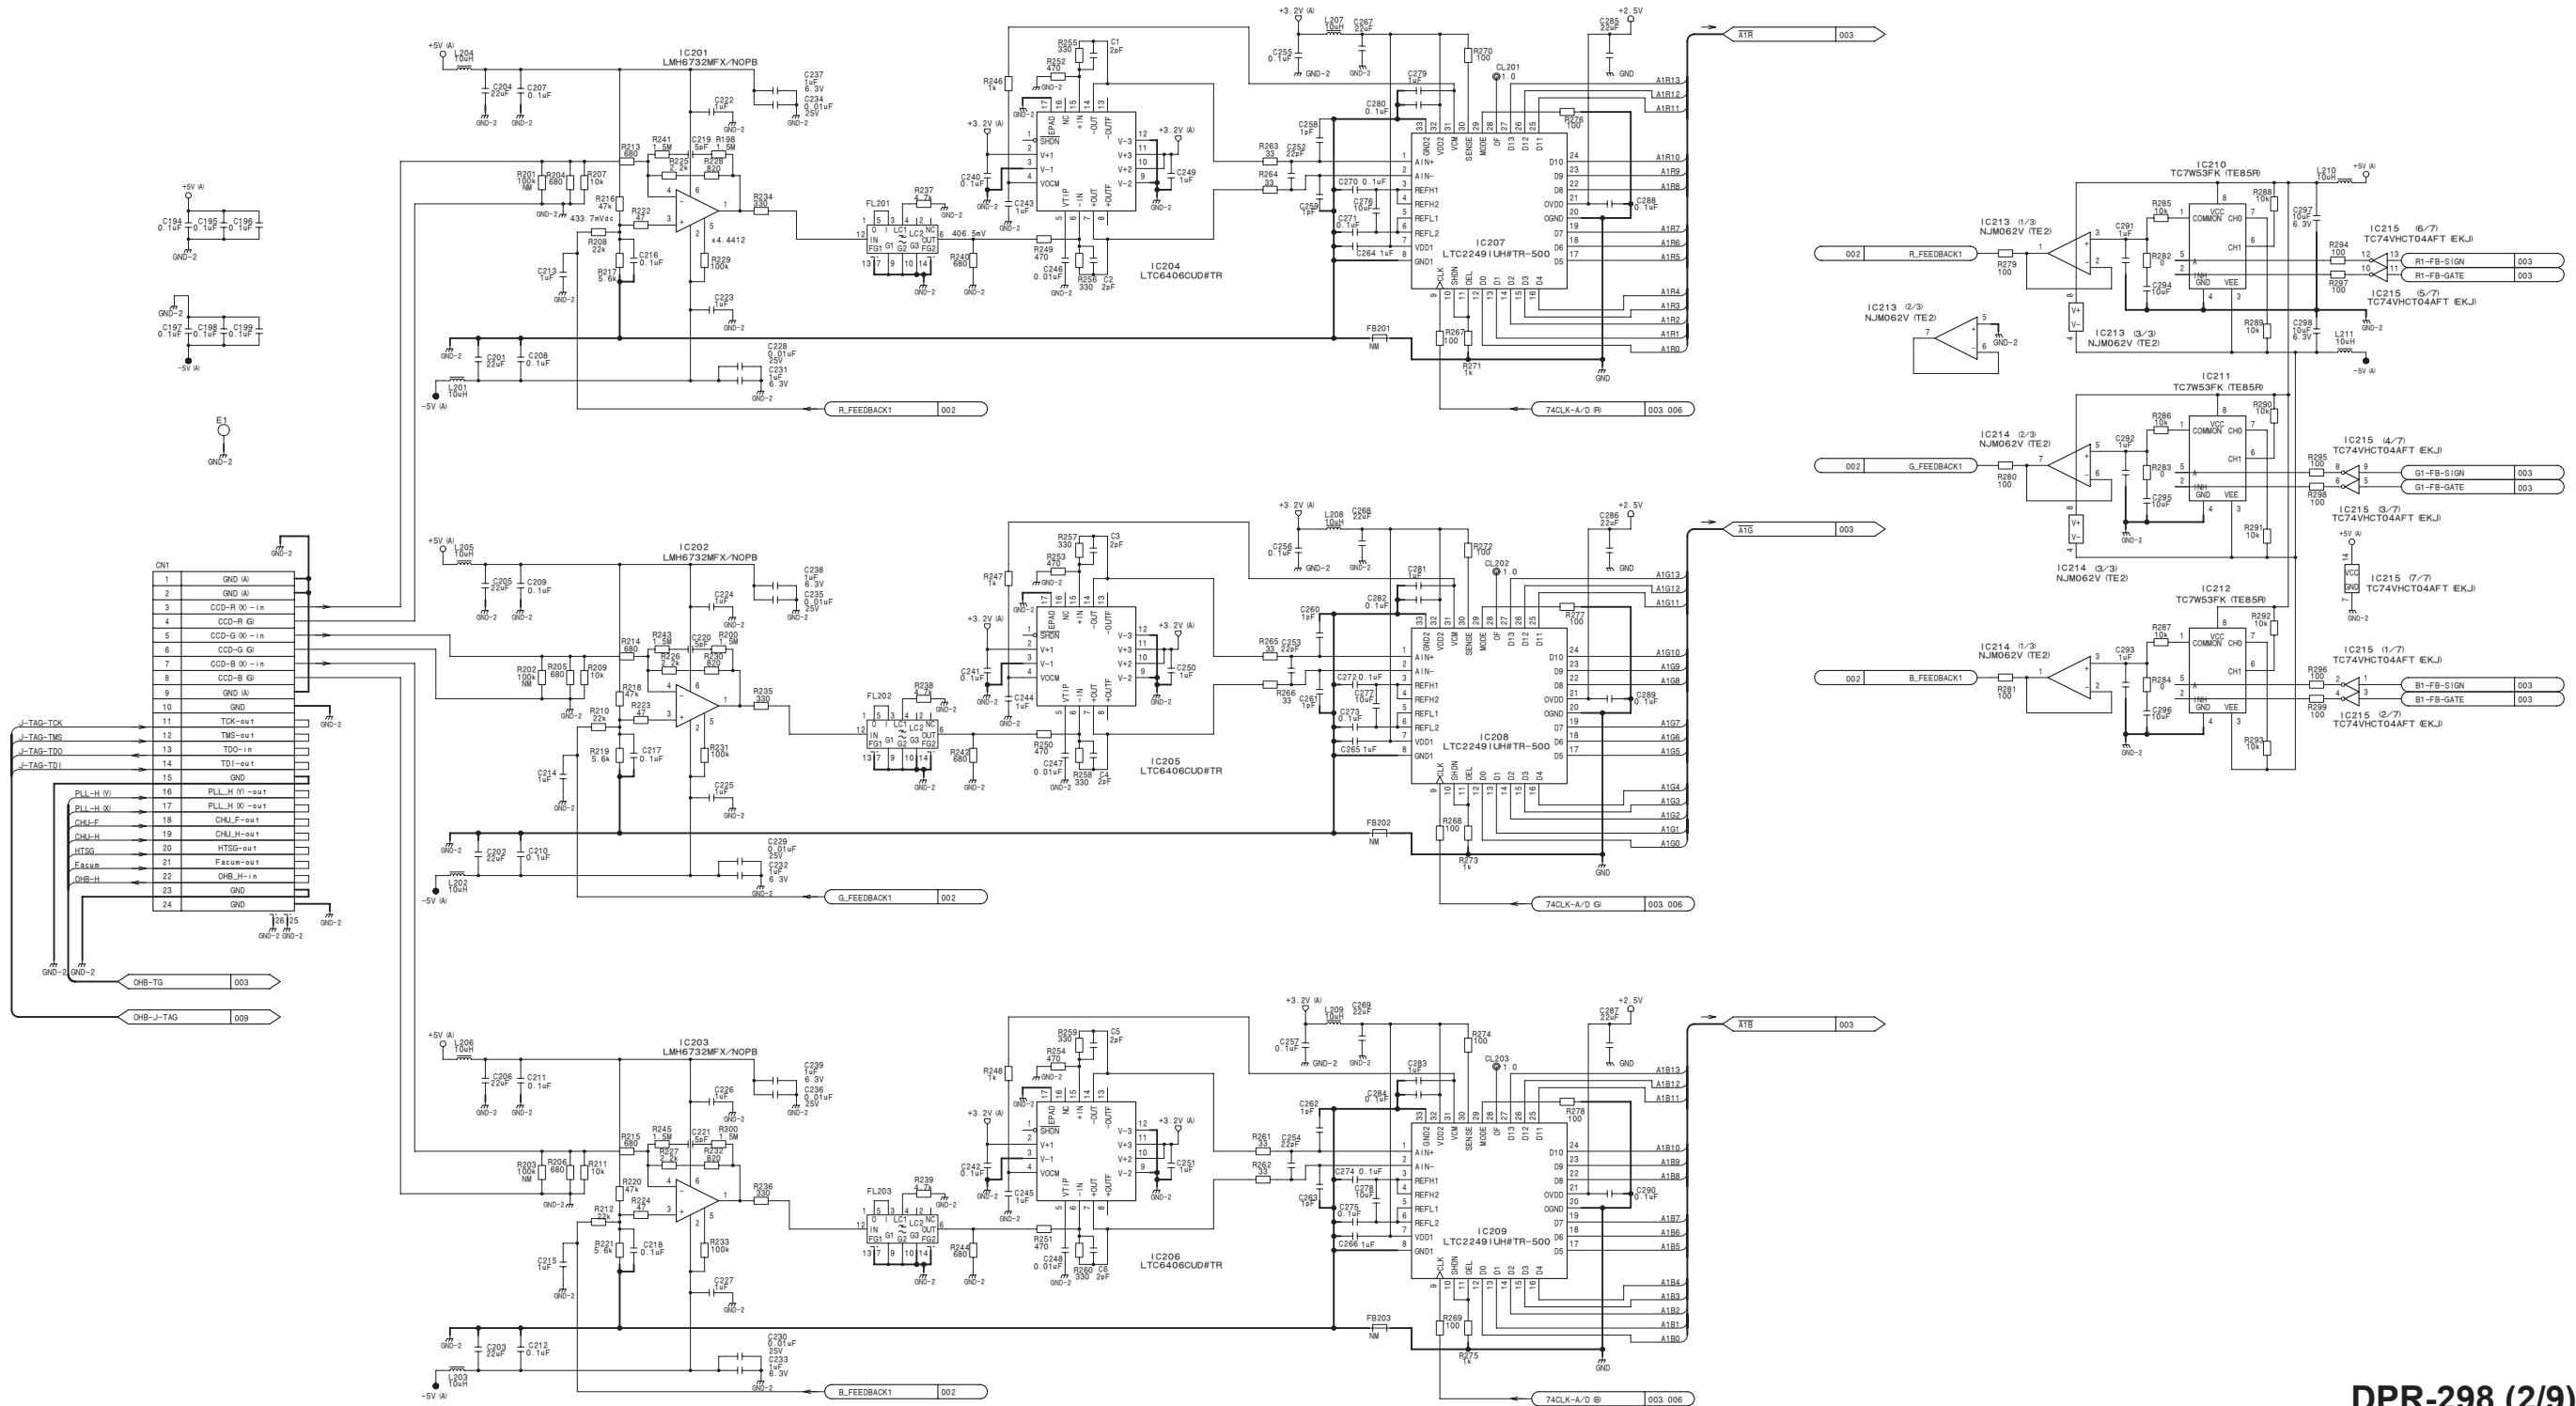



DPR-298 (2/9)

BOARD NO. 1-879-603-11
HSC-300_DPR-298_011_2



5

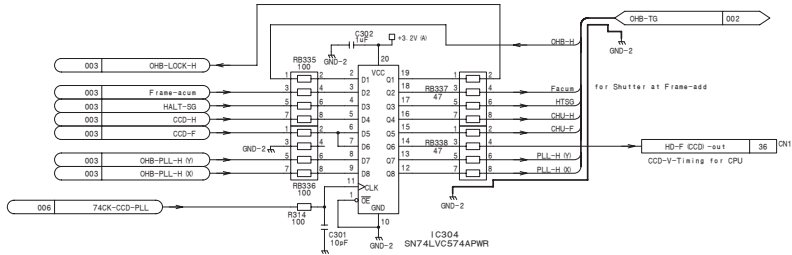

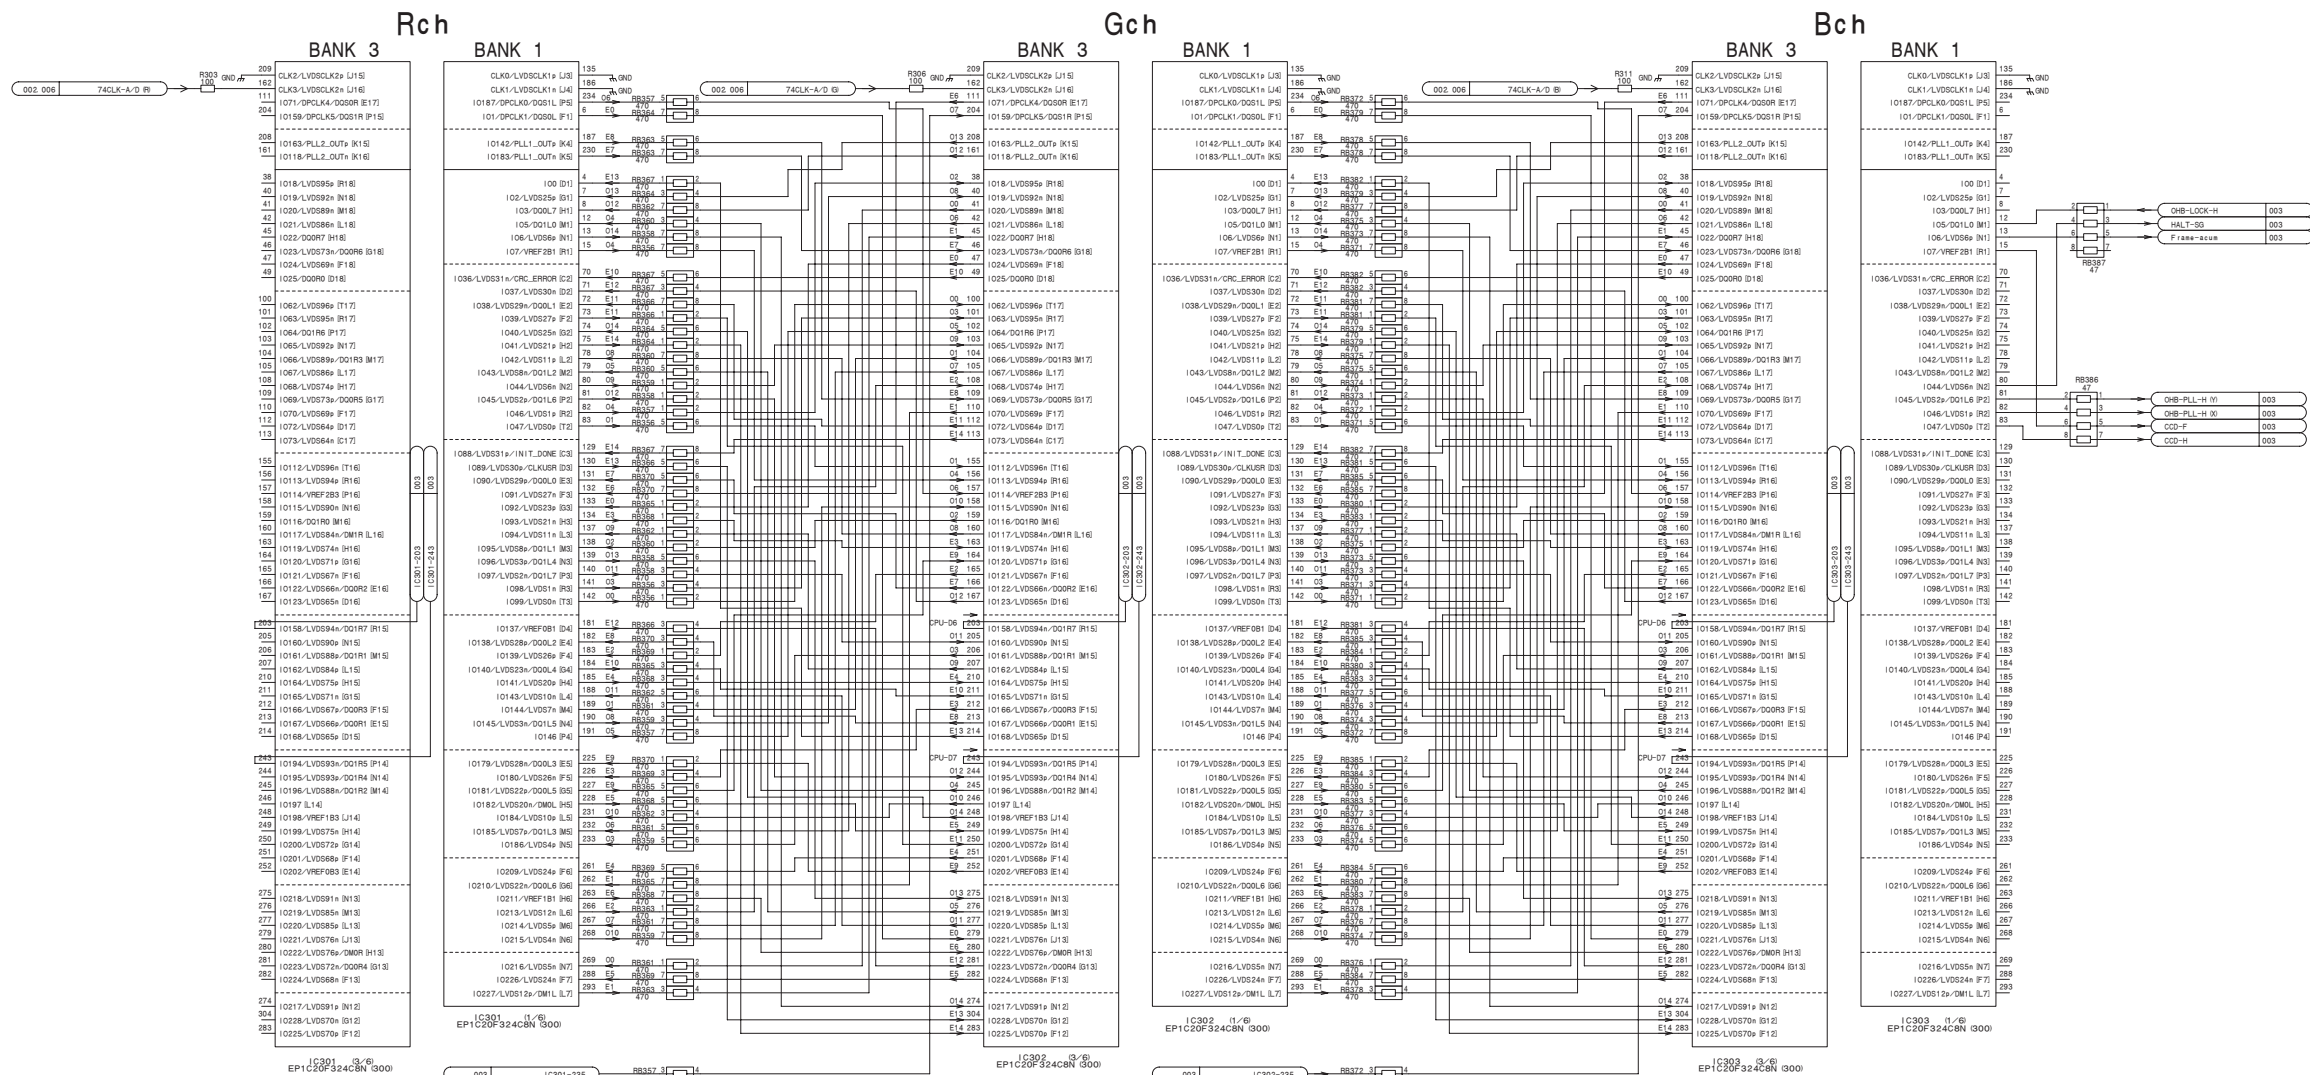



5

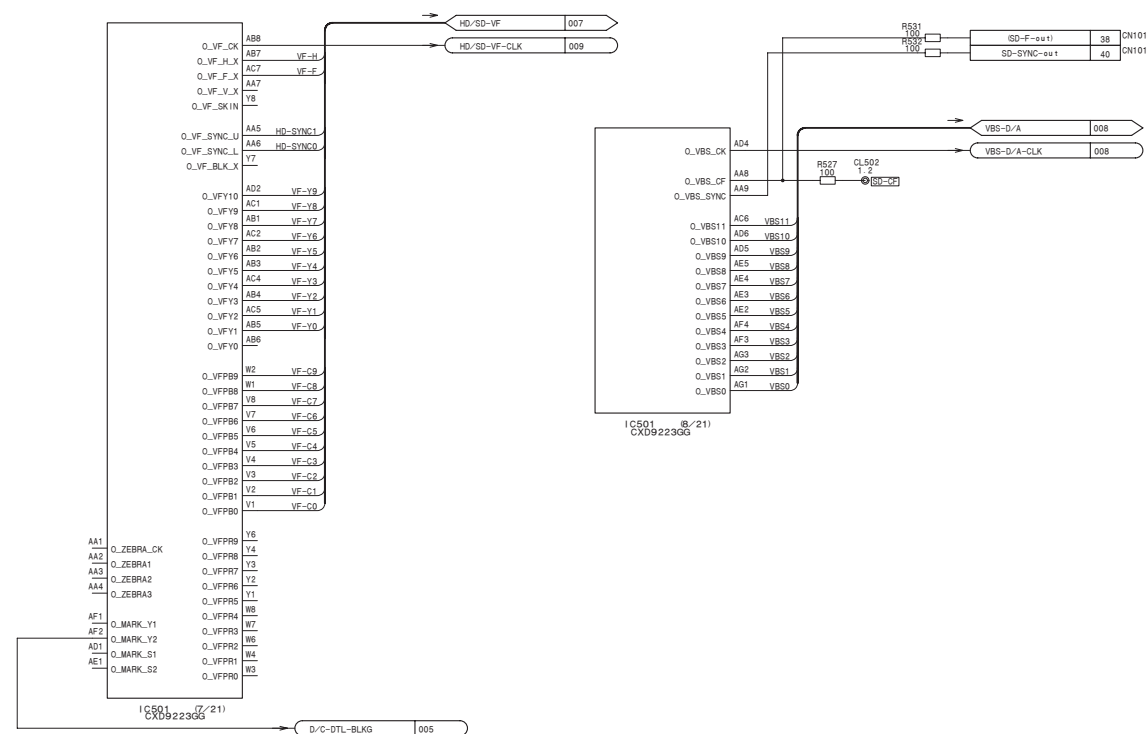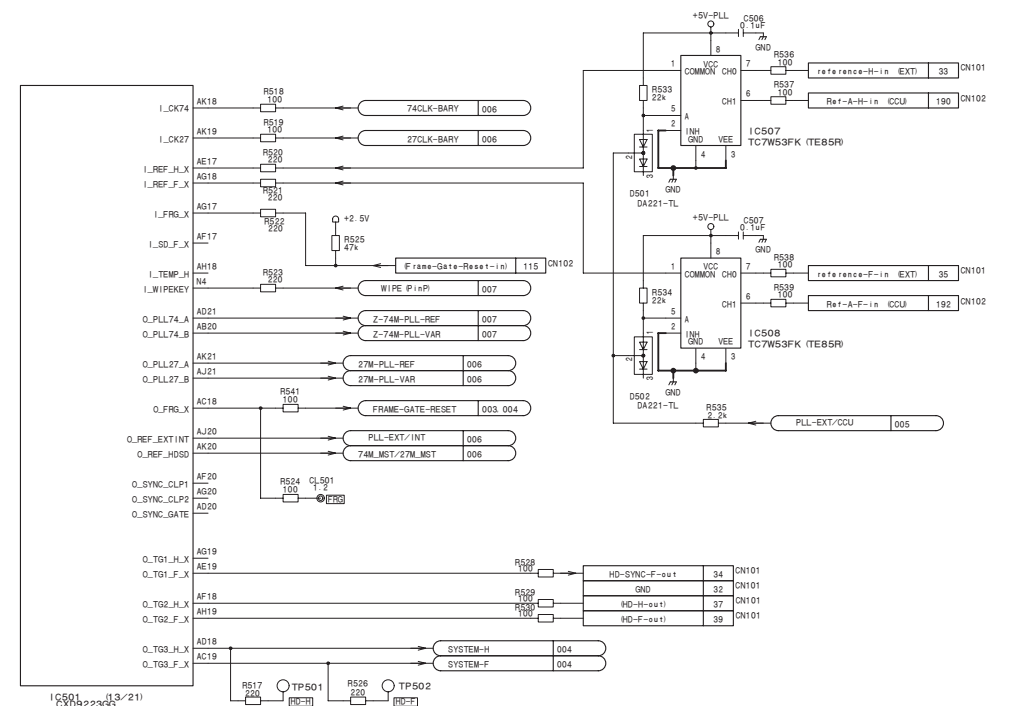

5







1


2


3

4

5

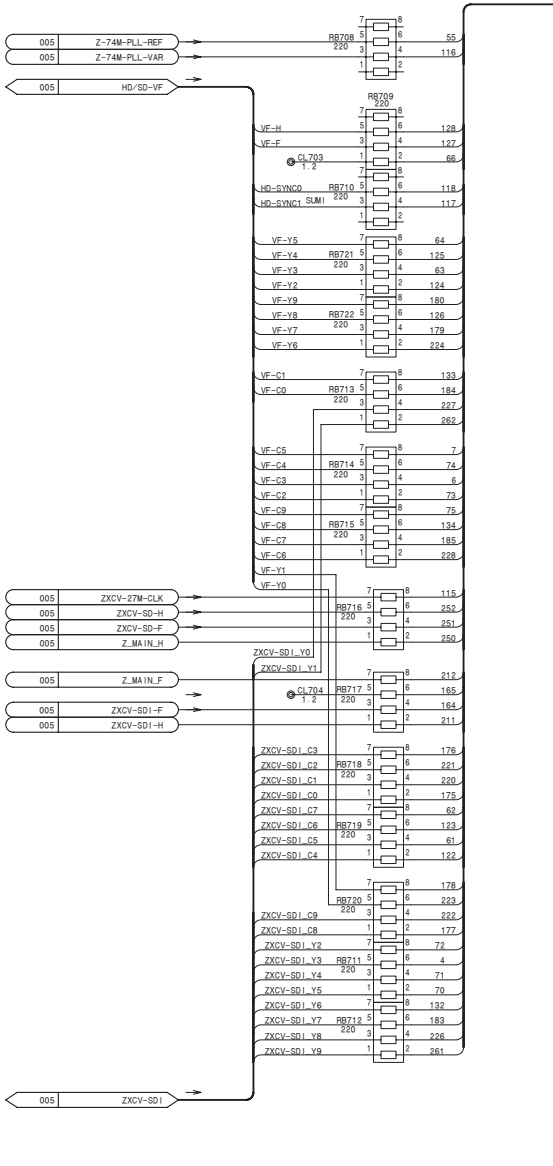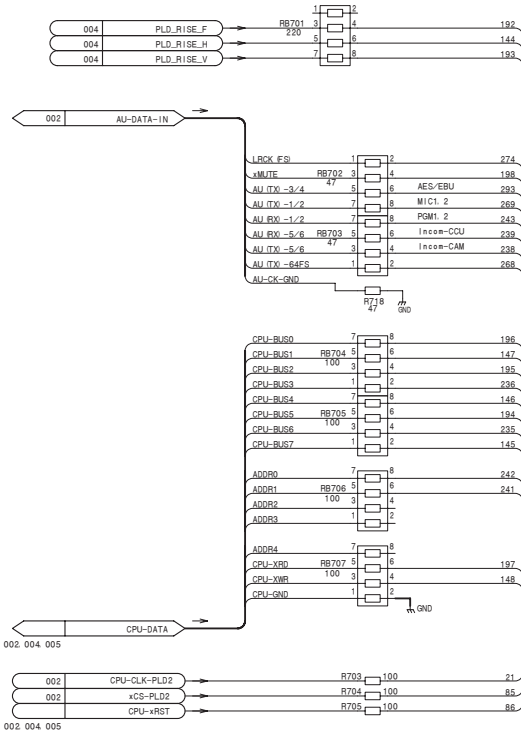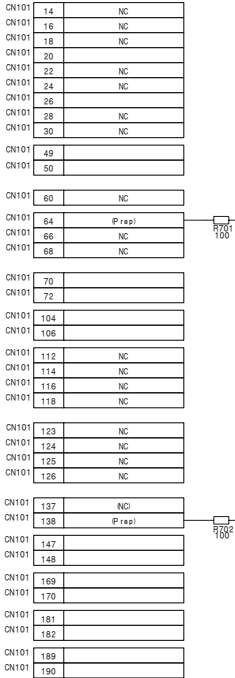






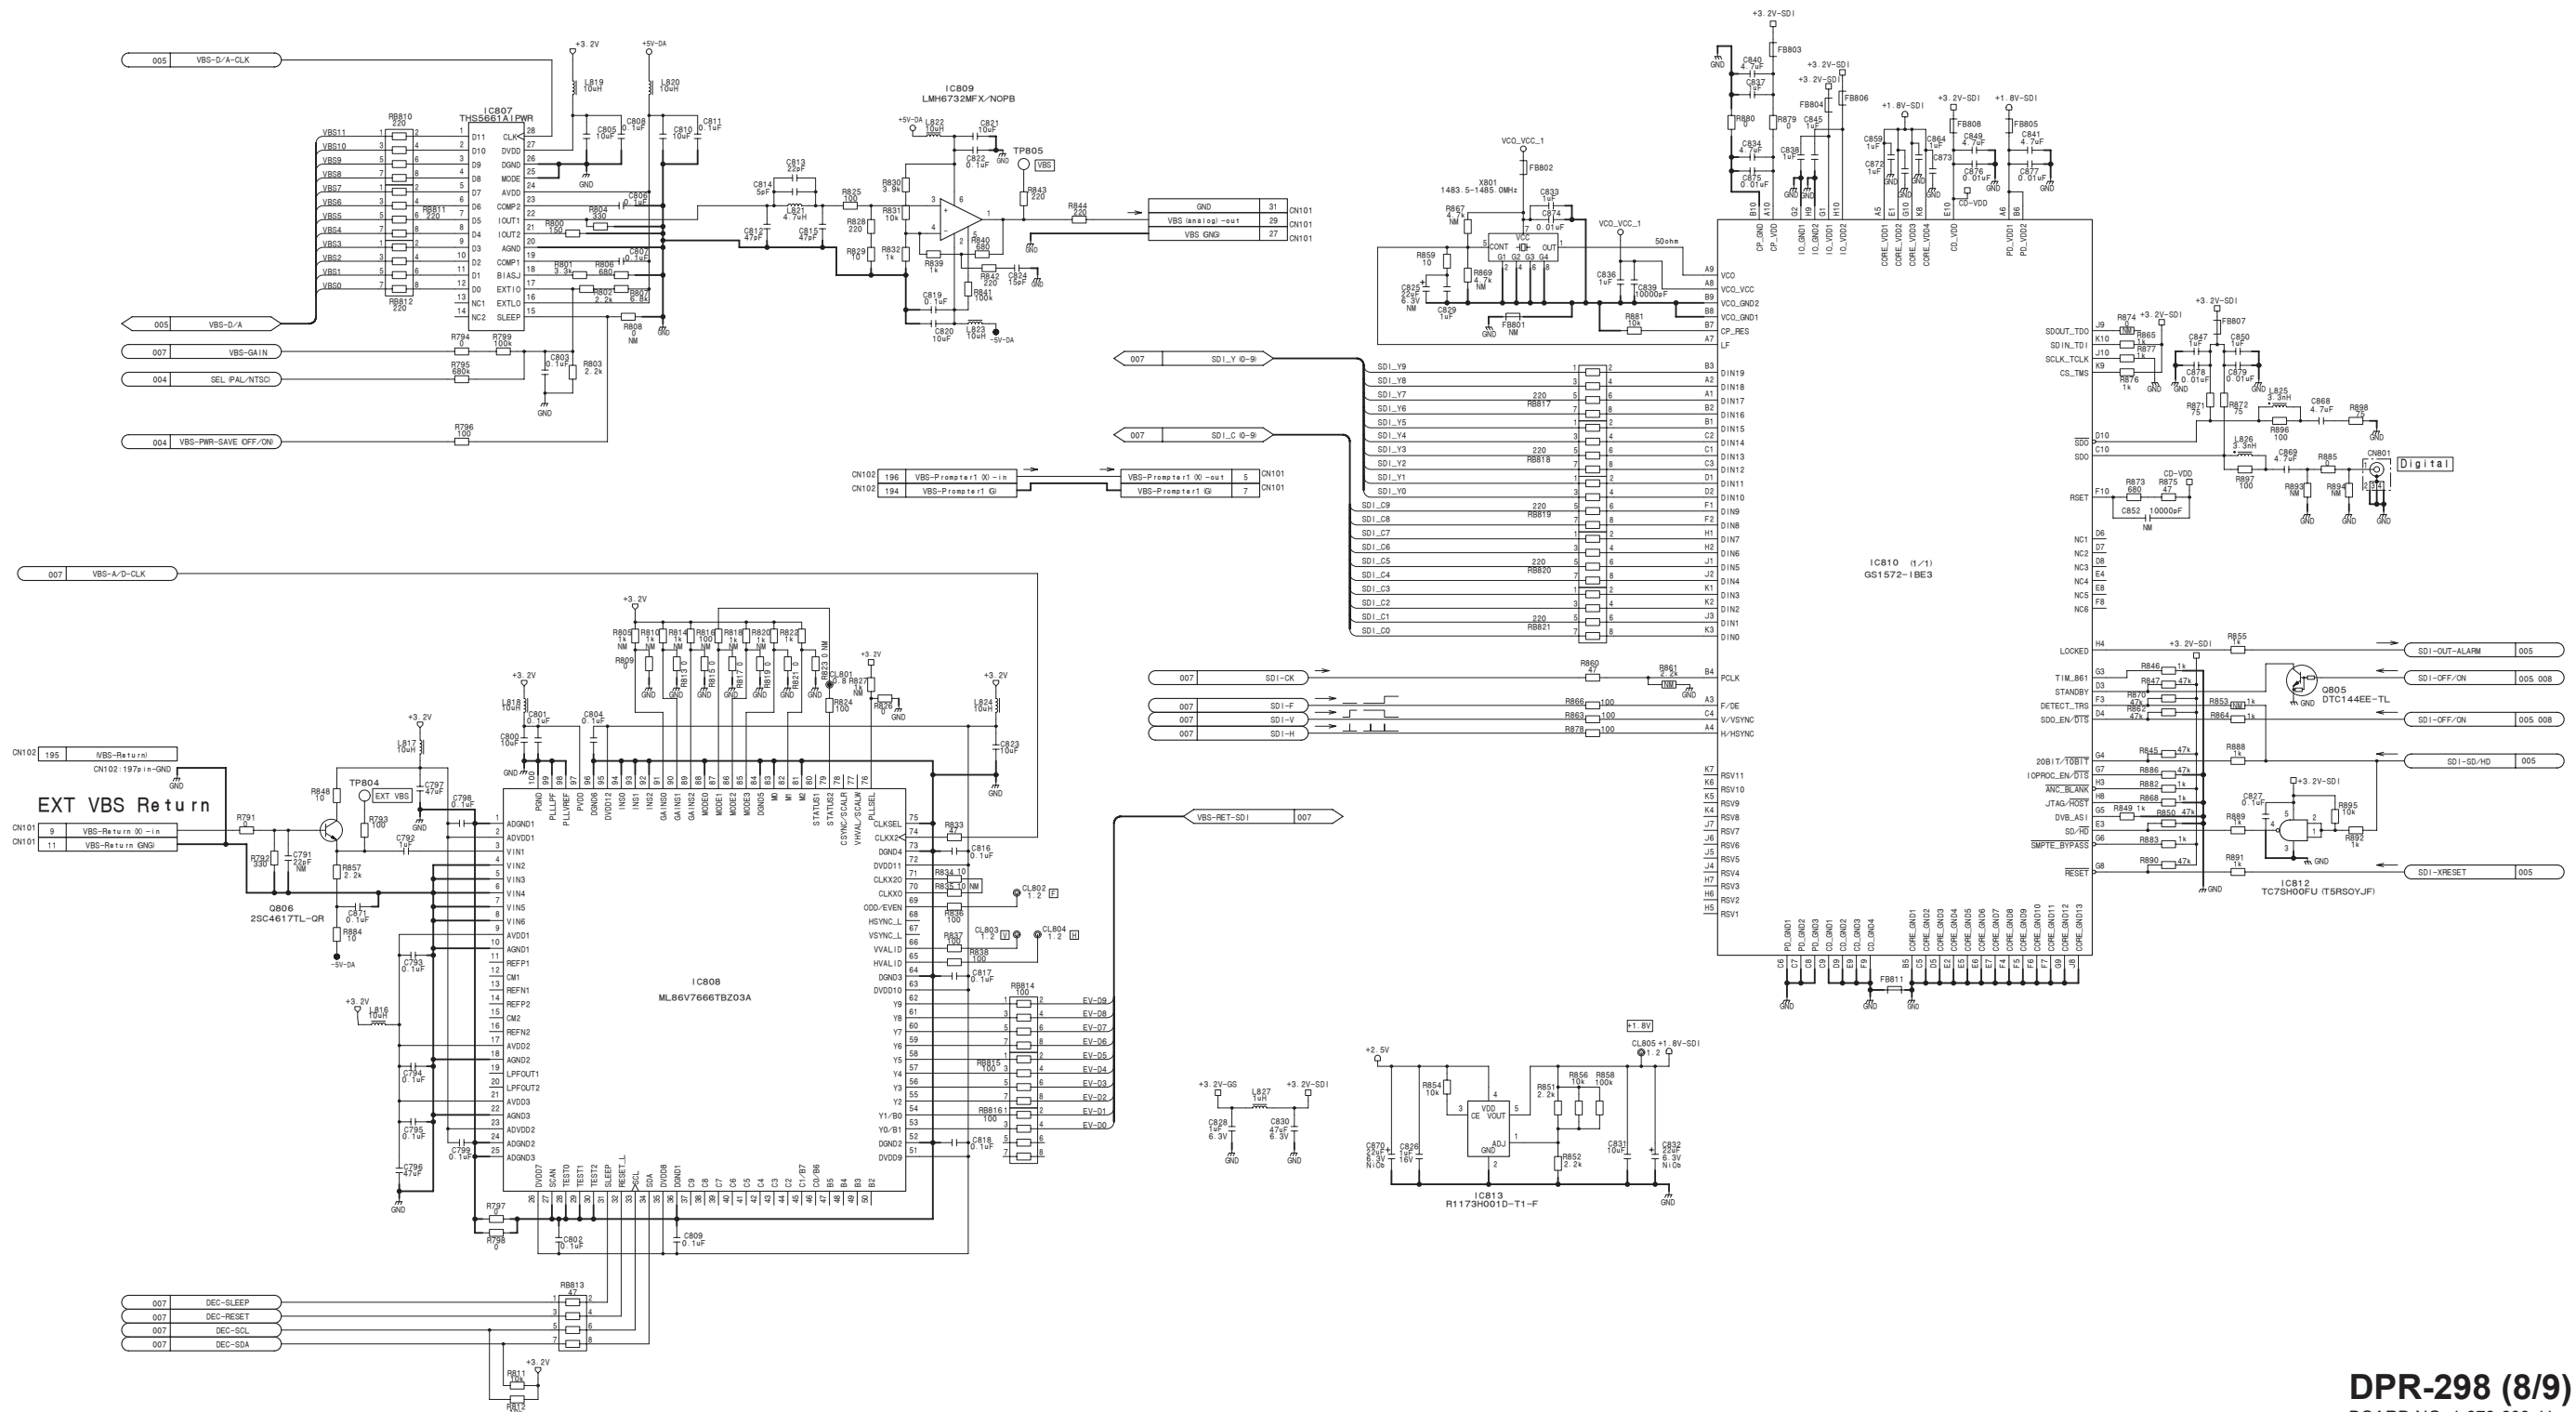


DPR-298 (8/9)

BOARD NO. 1-879-603-11
HSC-300_DPR-298_011_8

HSC-300_DPR-298_011_8

to CD-61

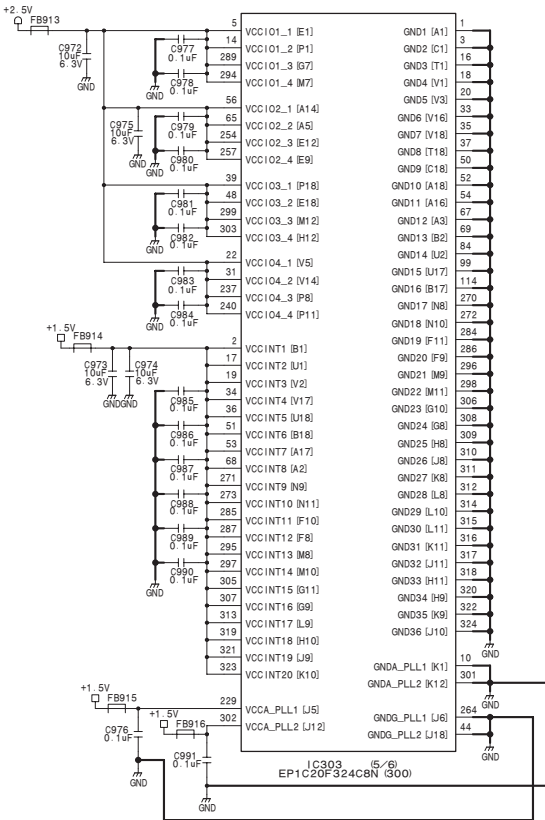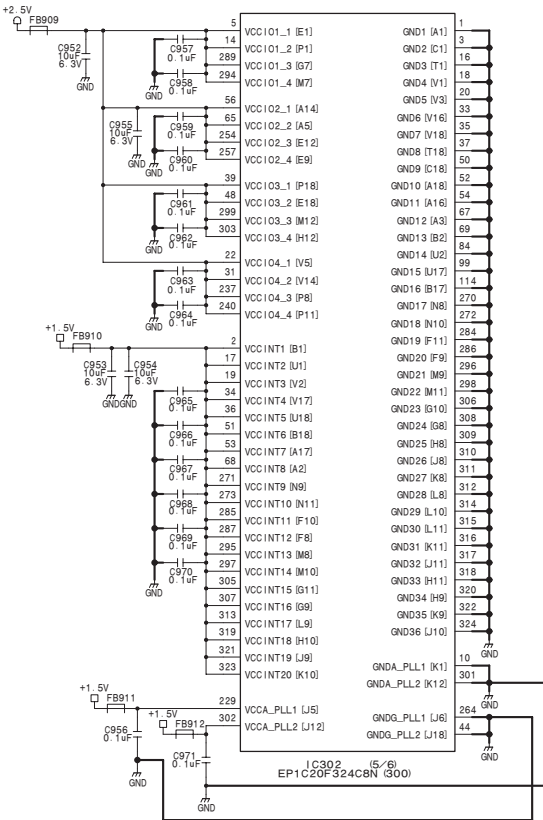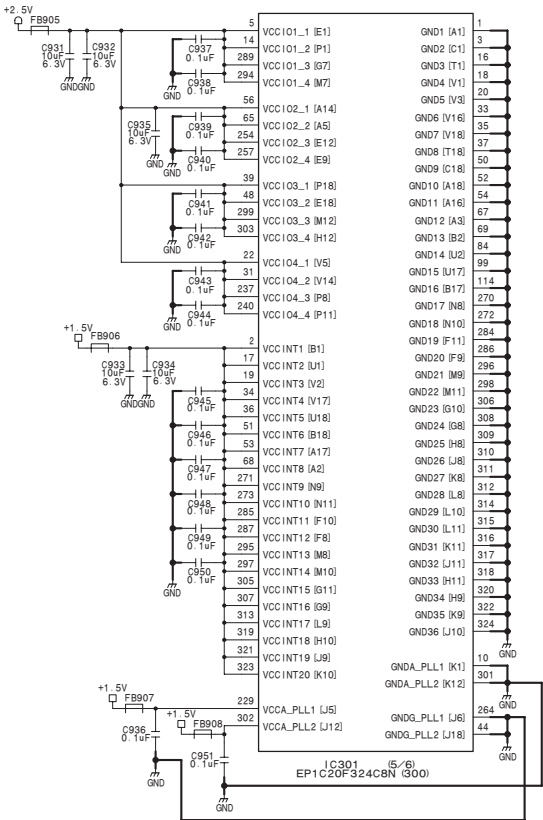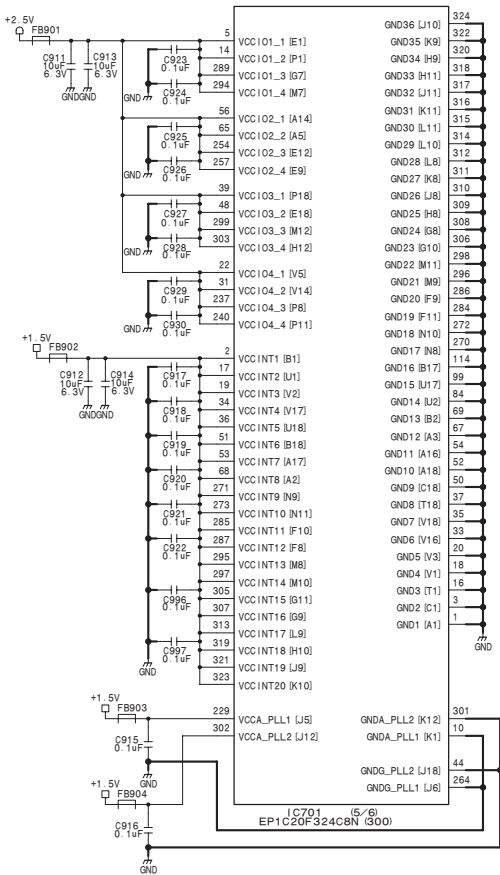


DPR-298 (9/9)

BOARD NO. 1-879-603-11
HSC-300_DPR-298_011_9


1

From NR

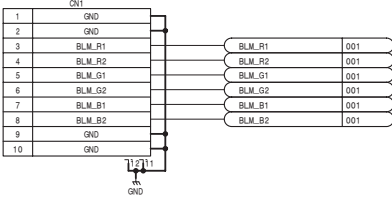

2


Gch

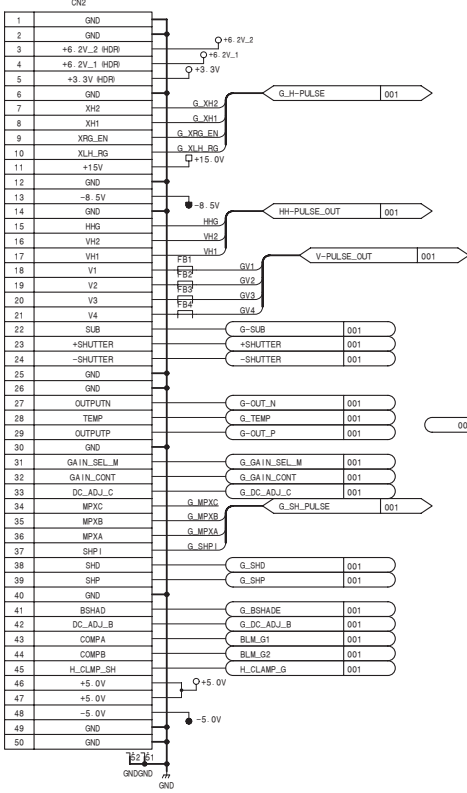



3










4

5


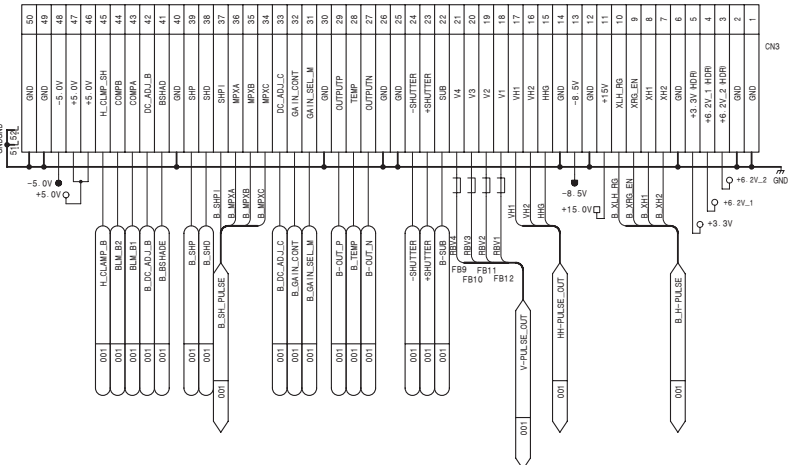



Bch

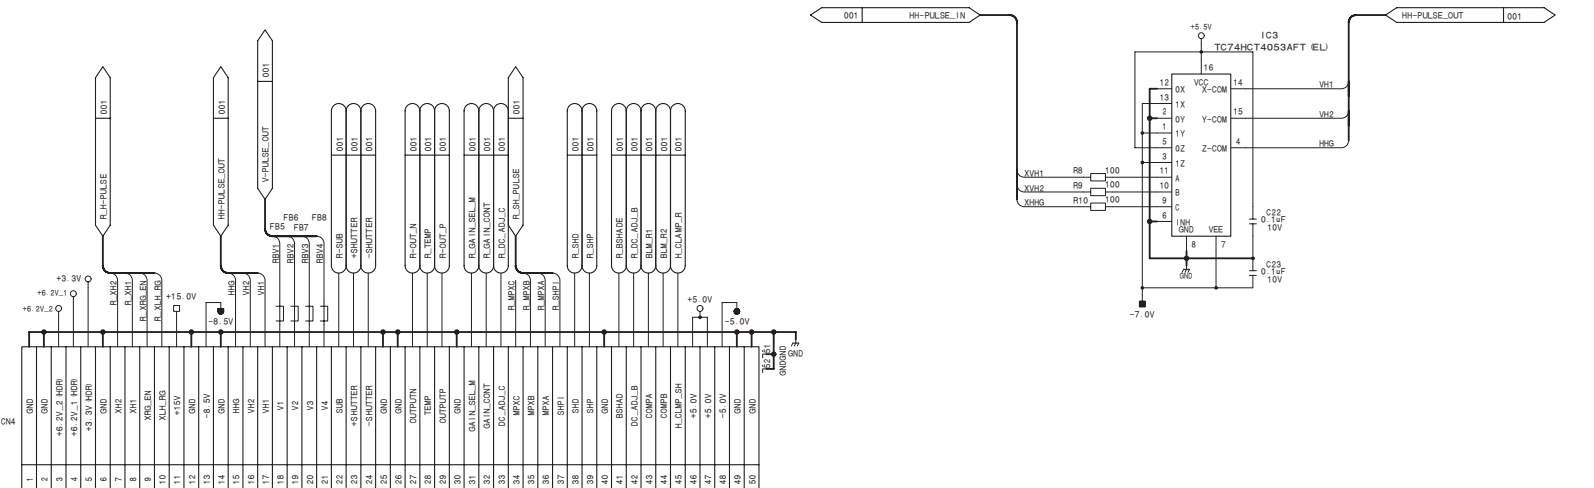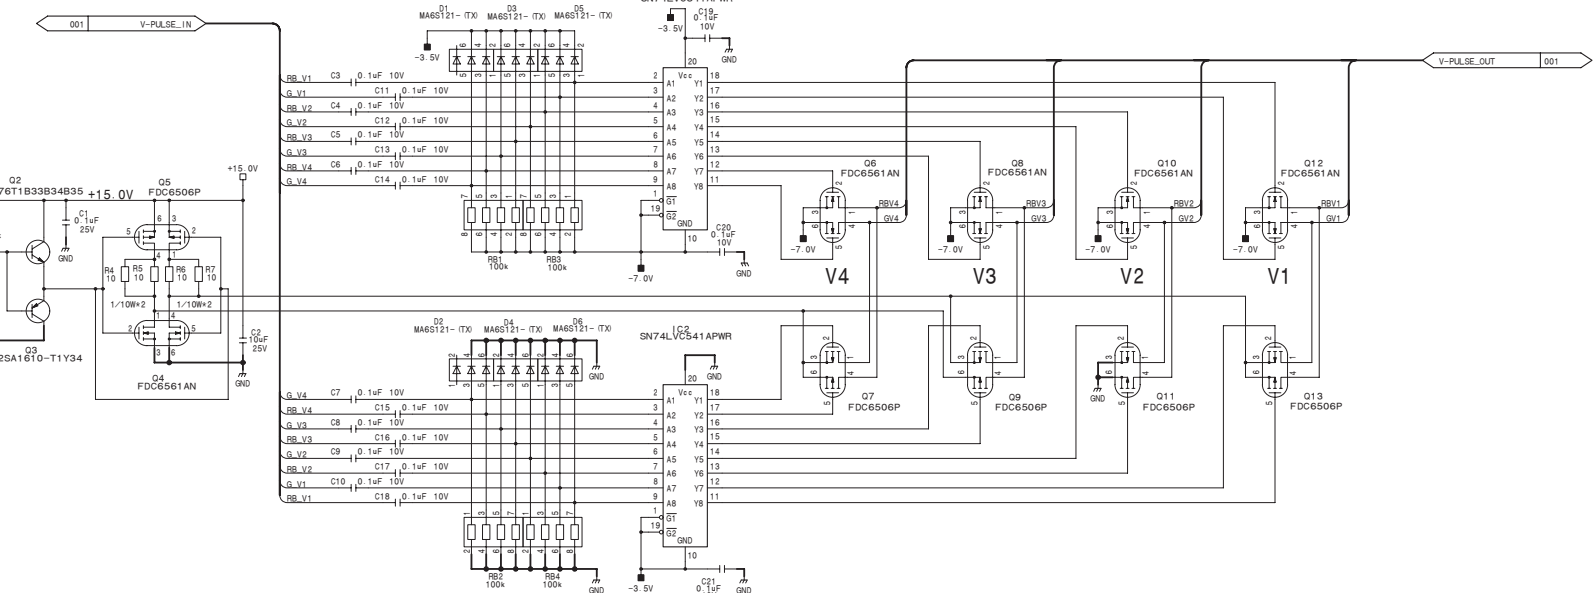

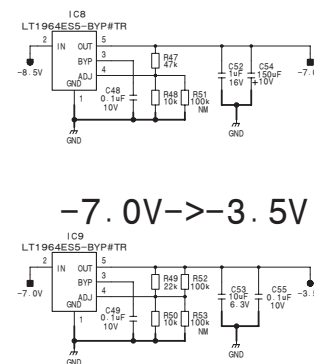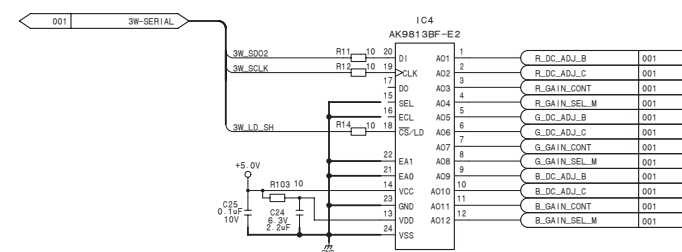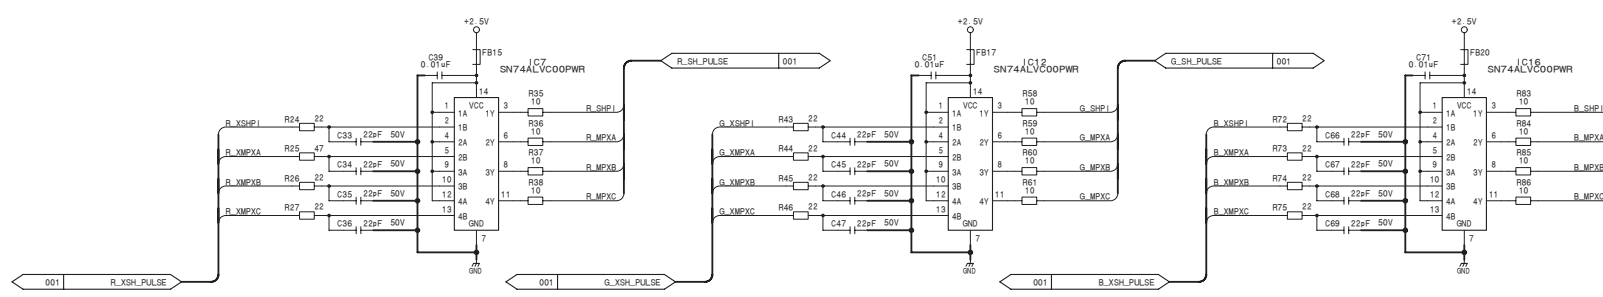
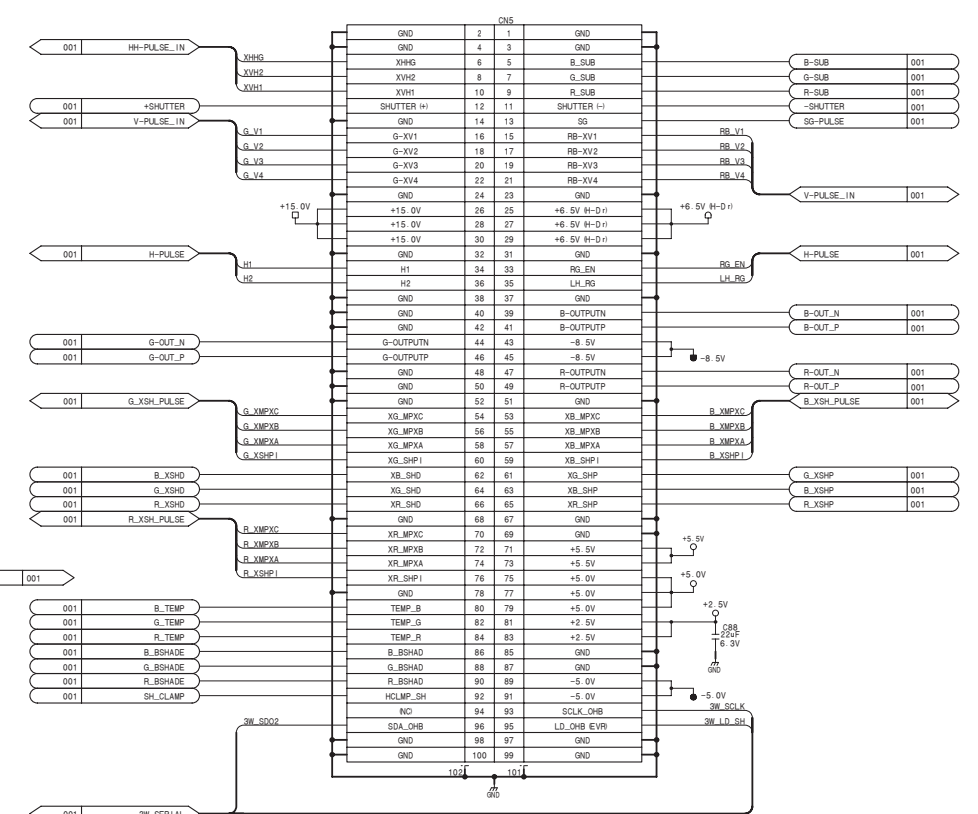


5

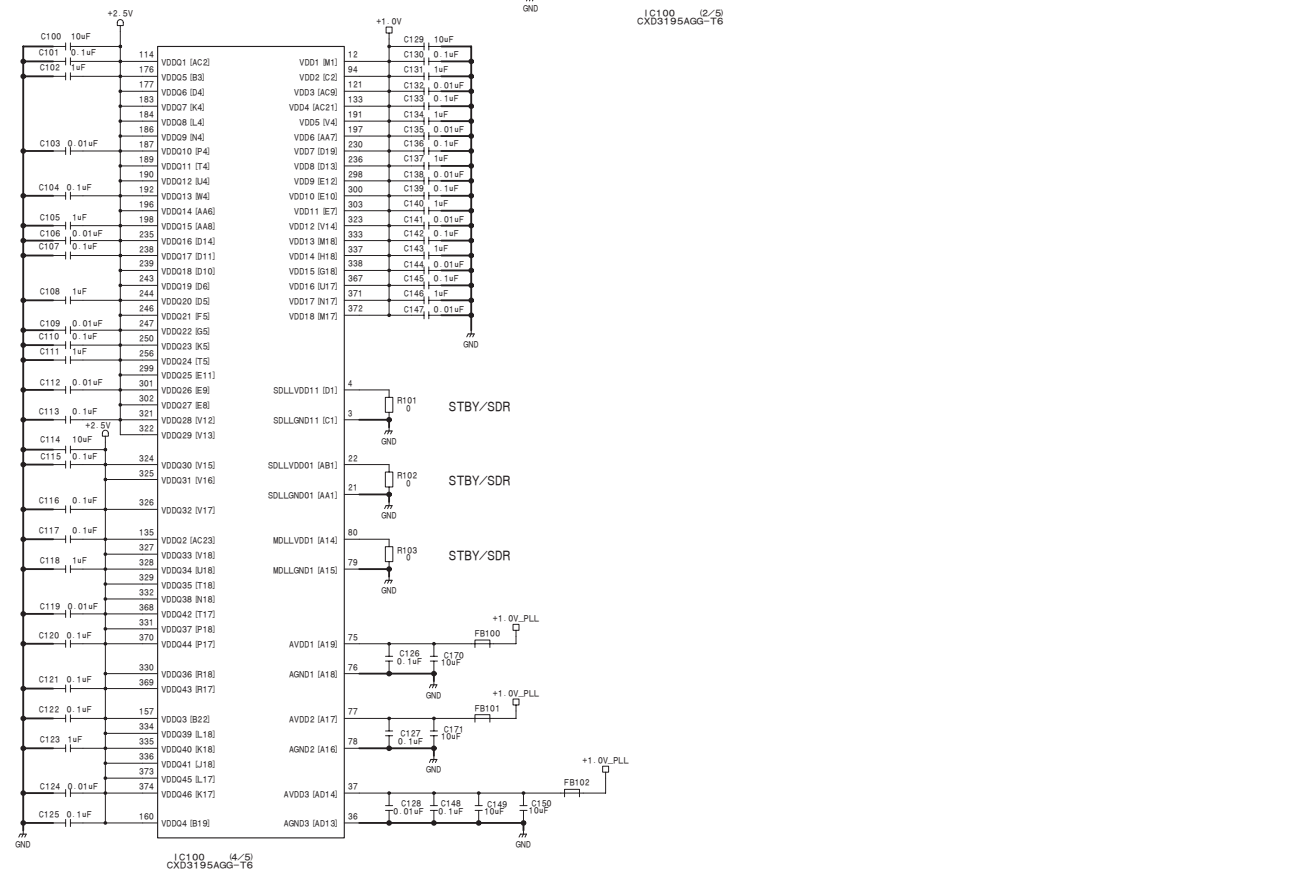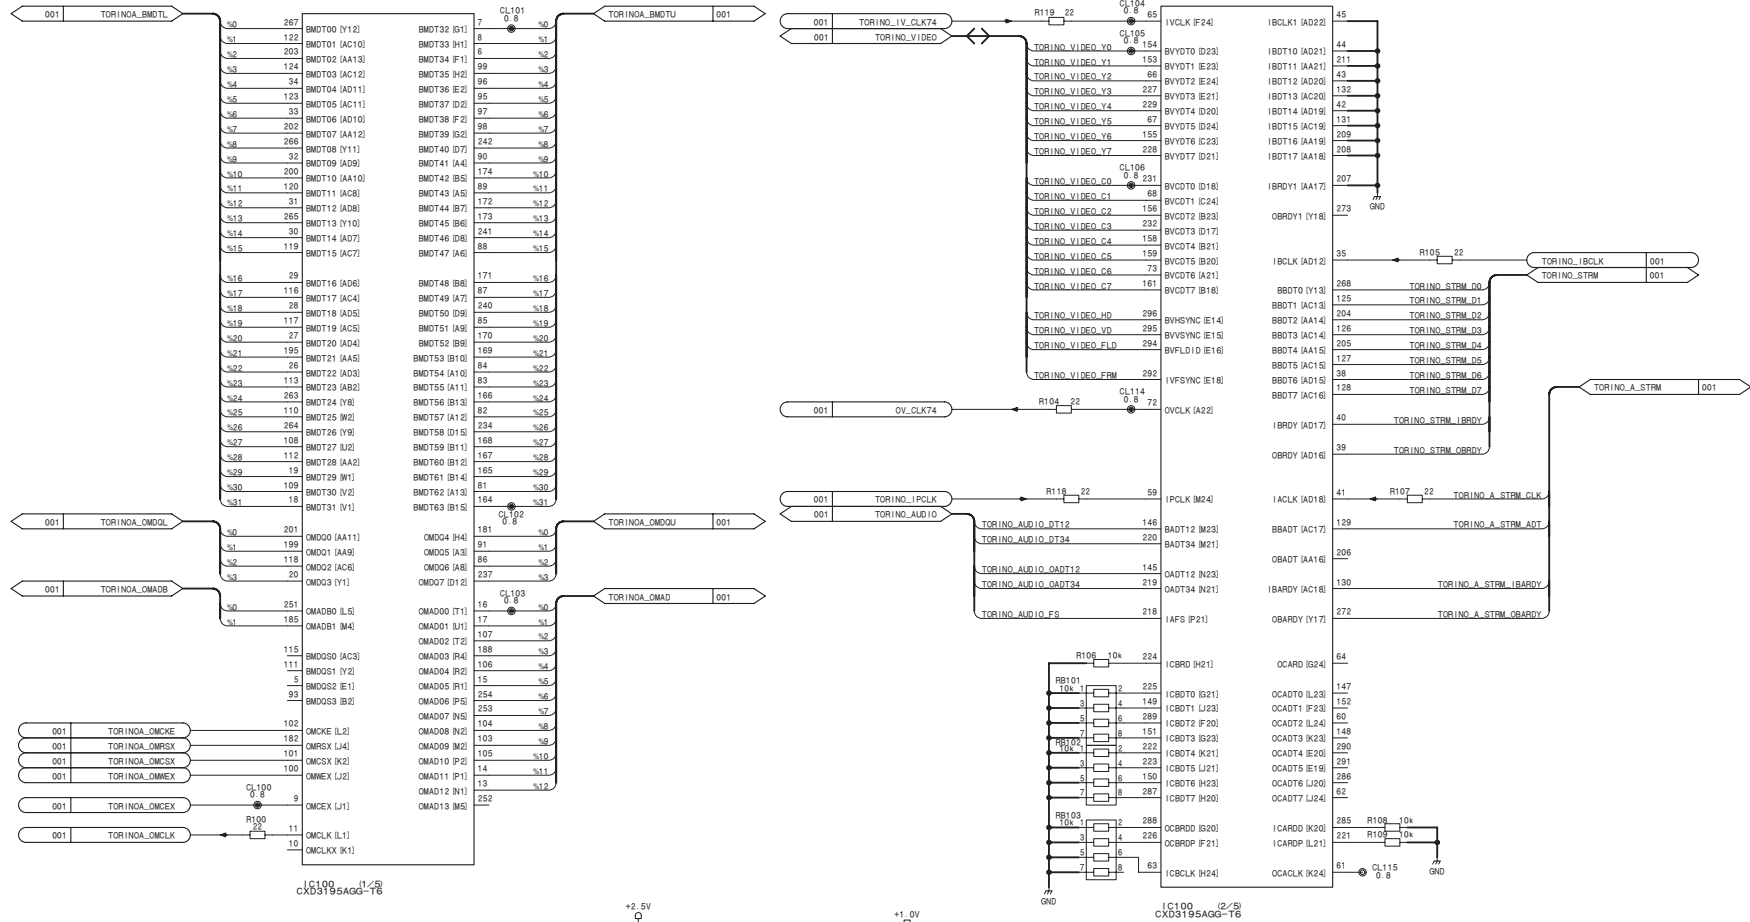

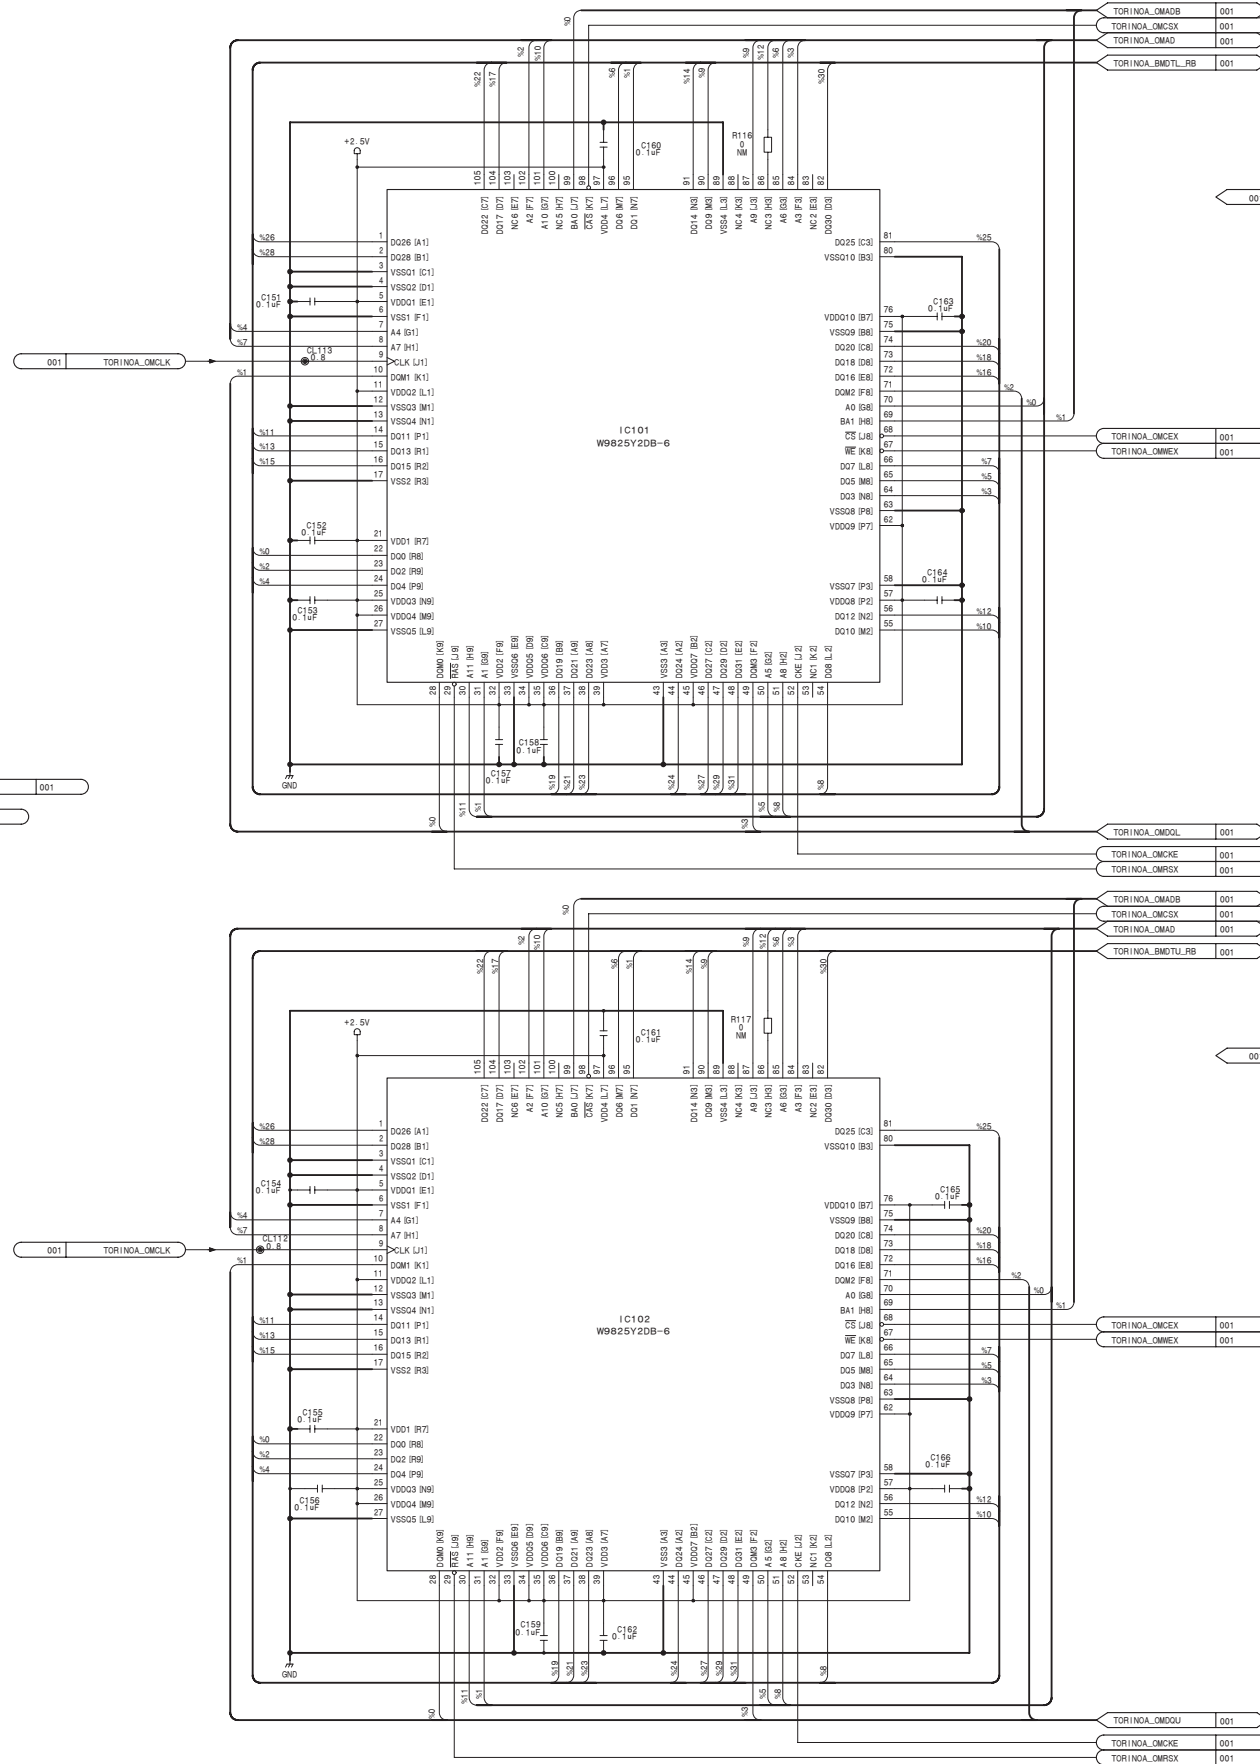

ENC-112
BOARD NO. 1-879-595-11
ENC-112_011_1

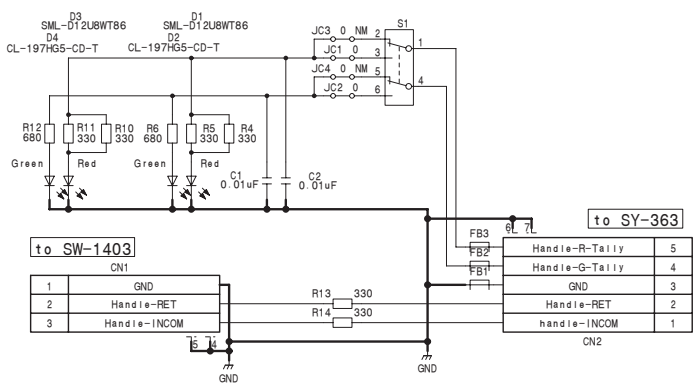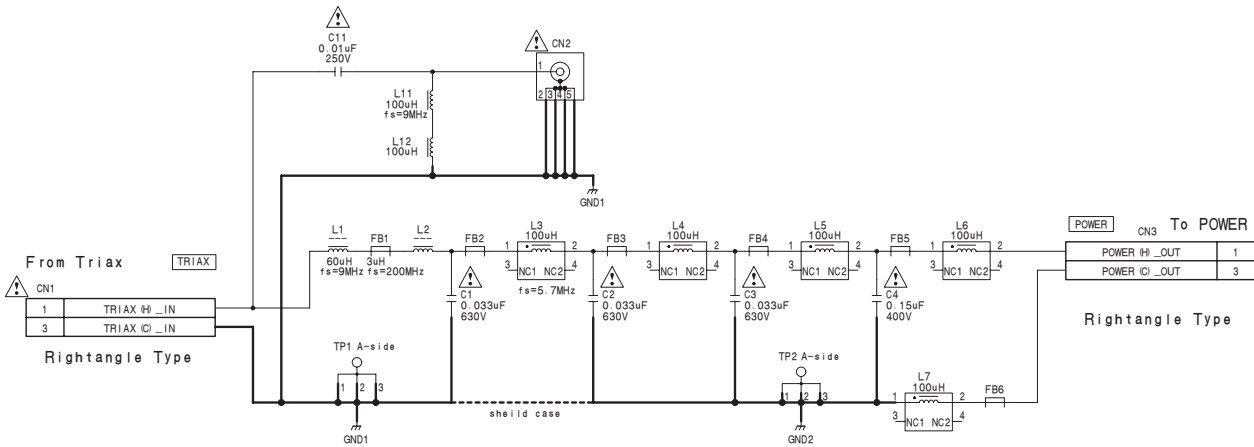



LE-355

BOARD NO. 1-879-614-11
HSC-300_LE-355_011_1

FL-348

BOARD NO. 1-879-610-11
HSC-300_FL-348_011_1




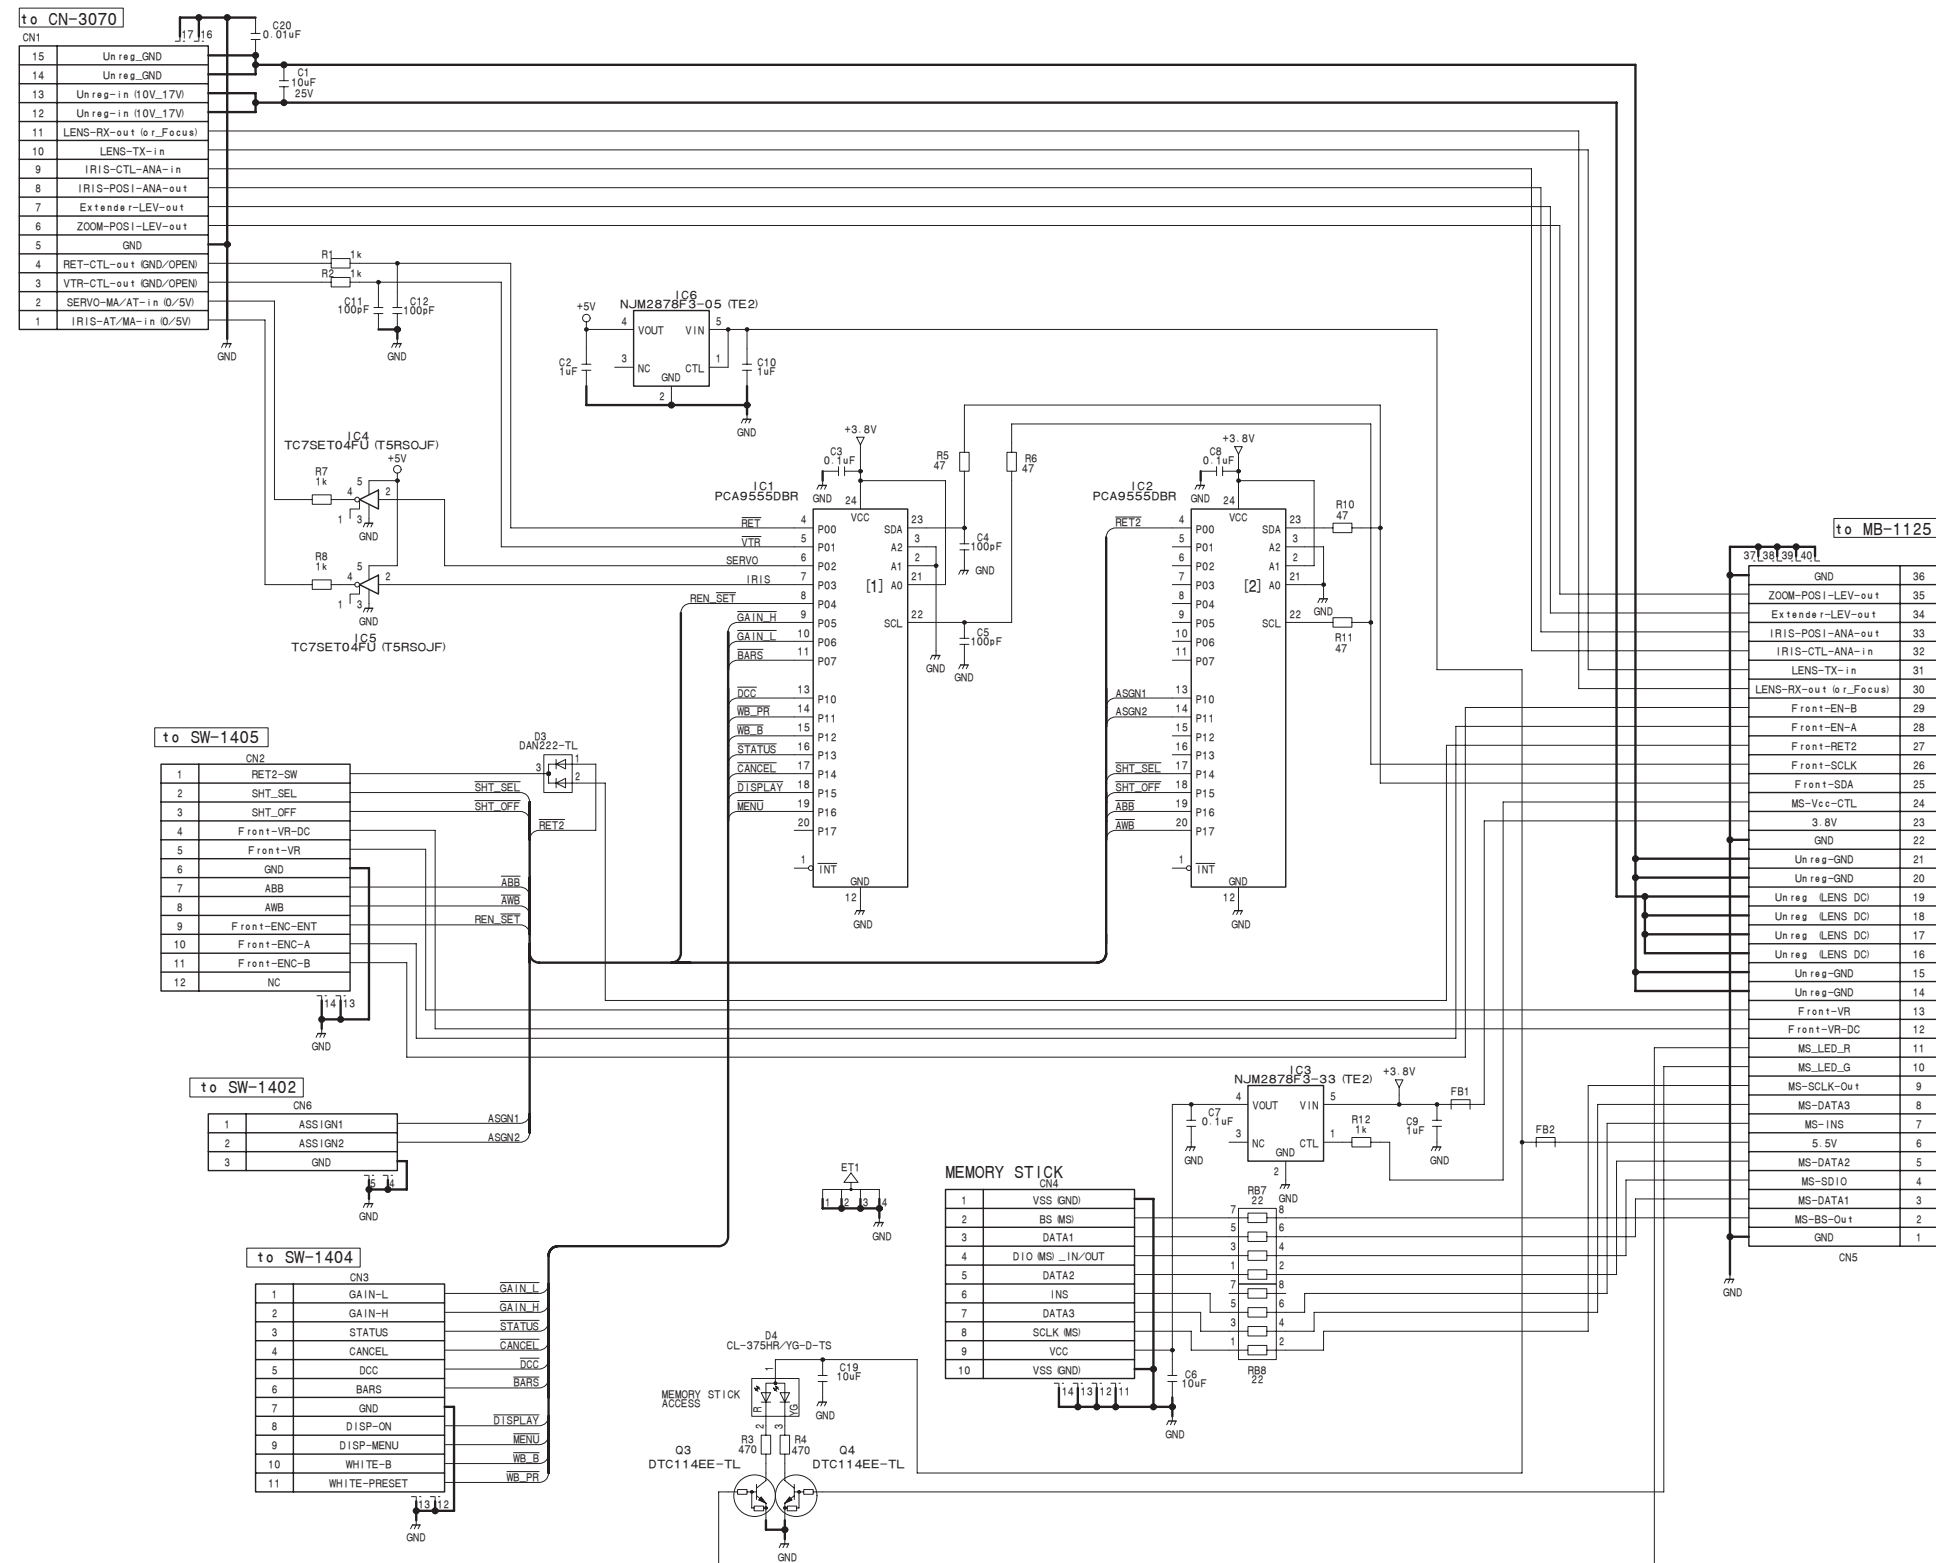


MS-91

BOARD NO. 1-879-616-11
HSC-300_MS-91_011_1










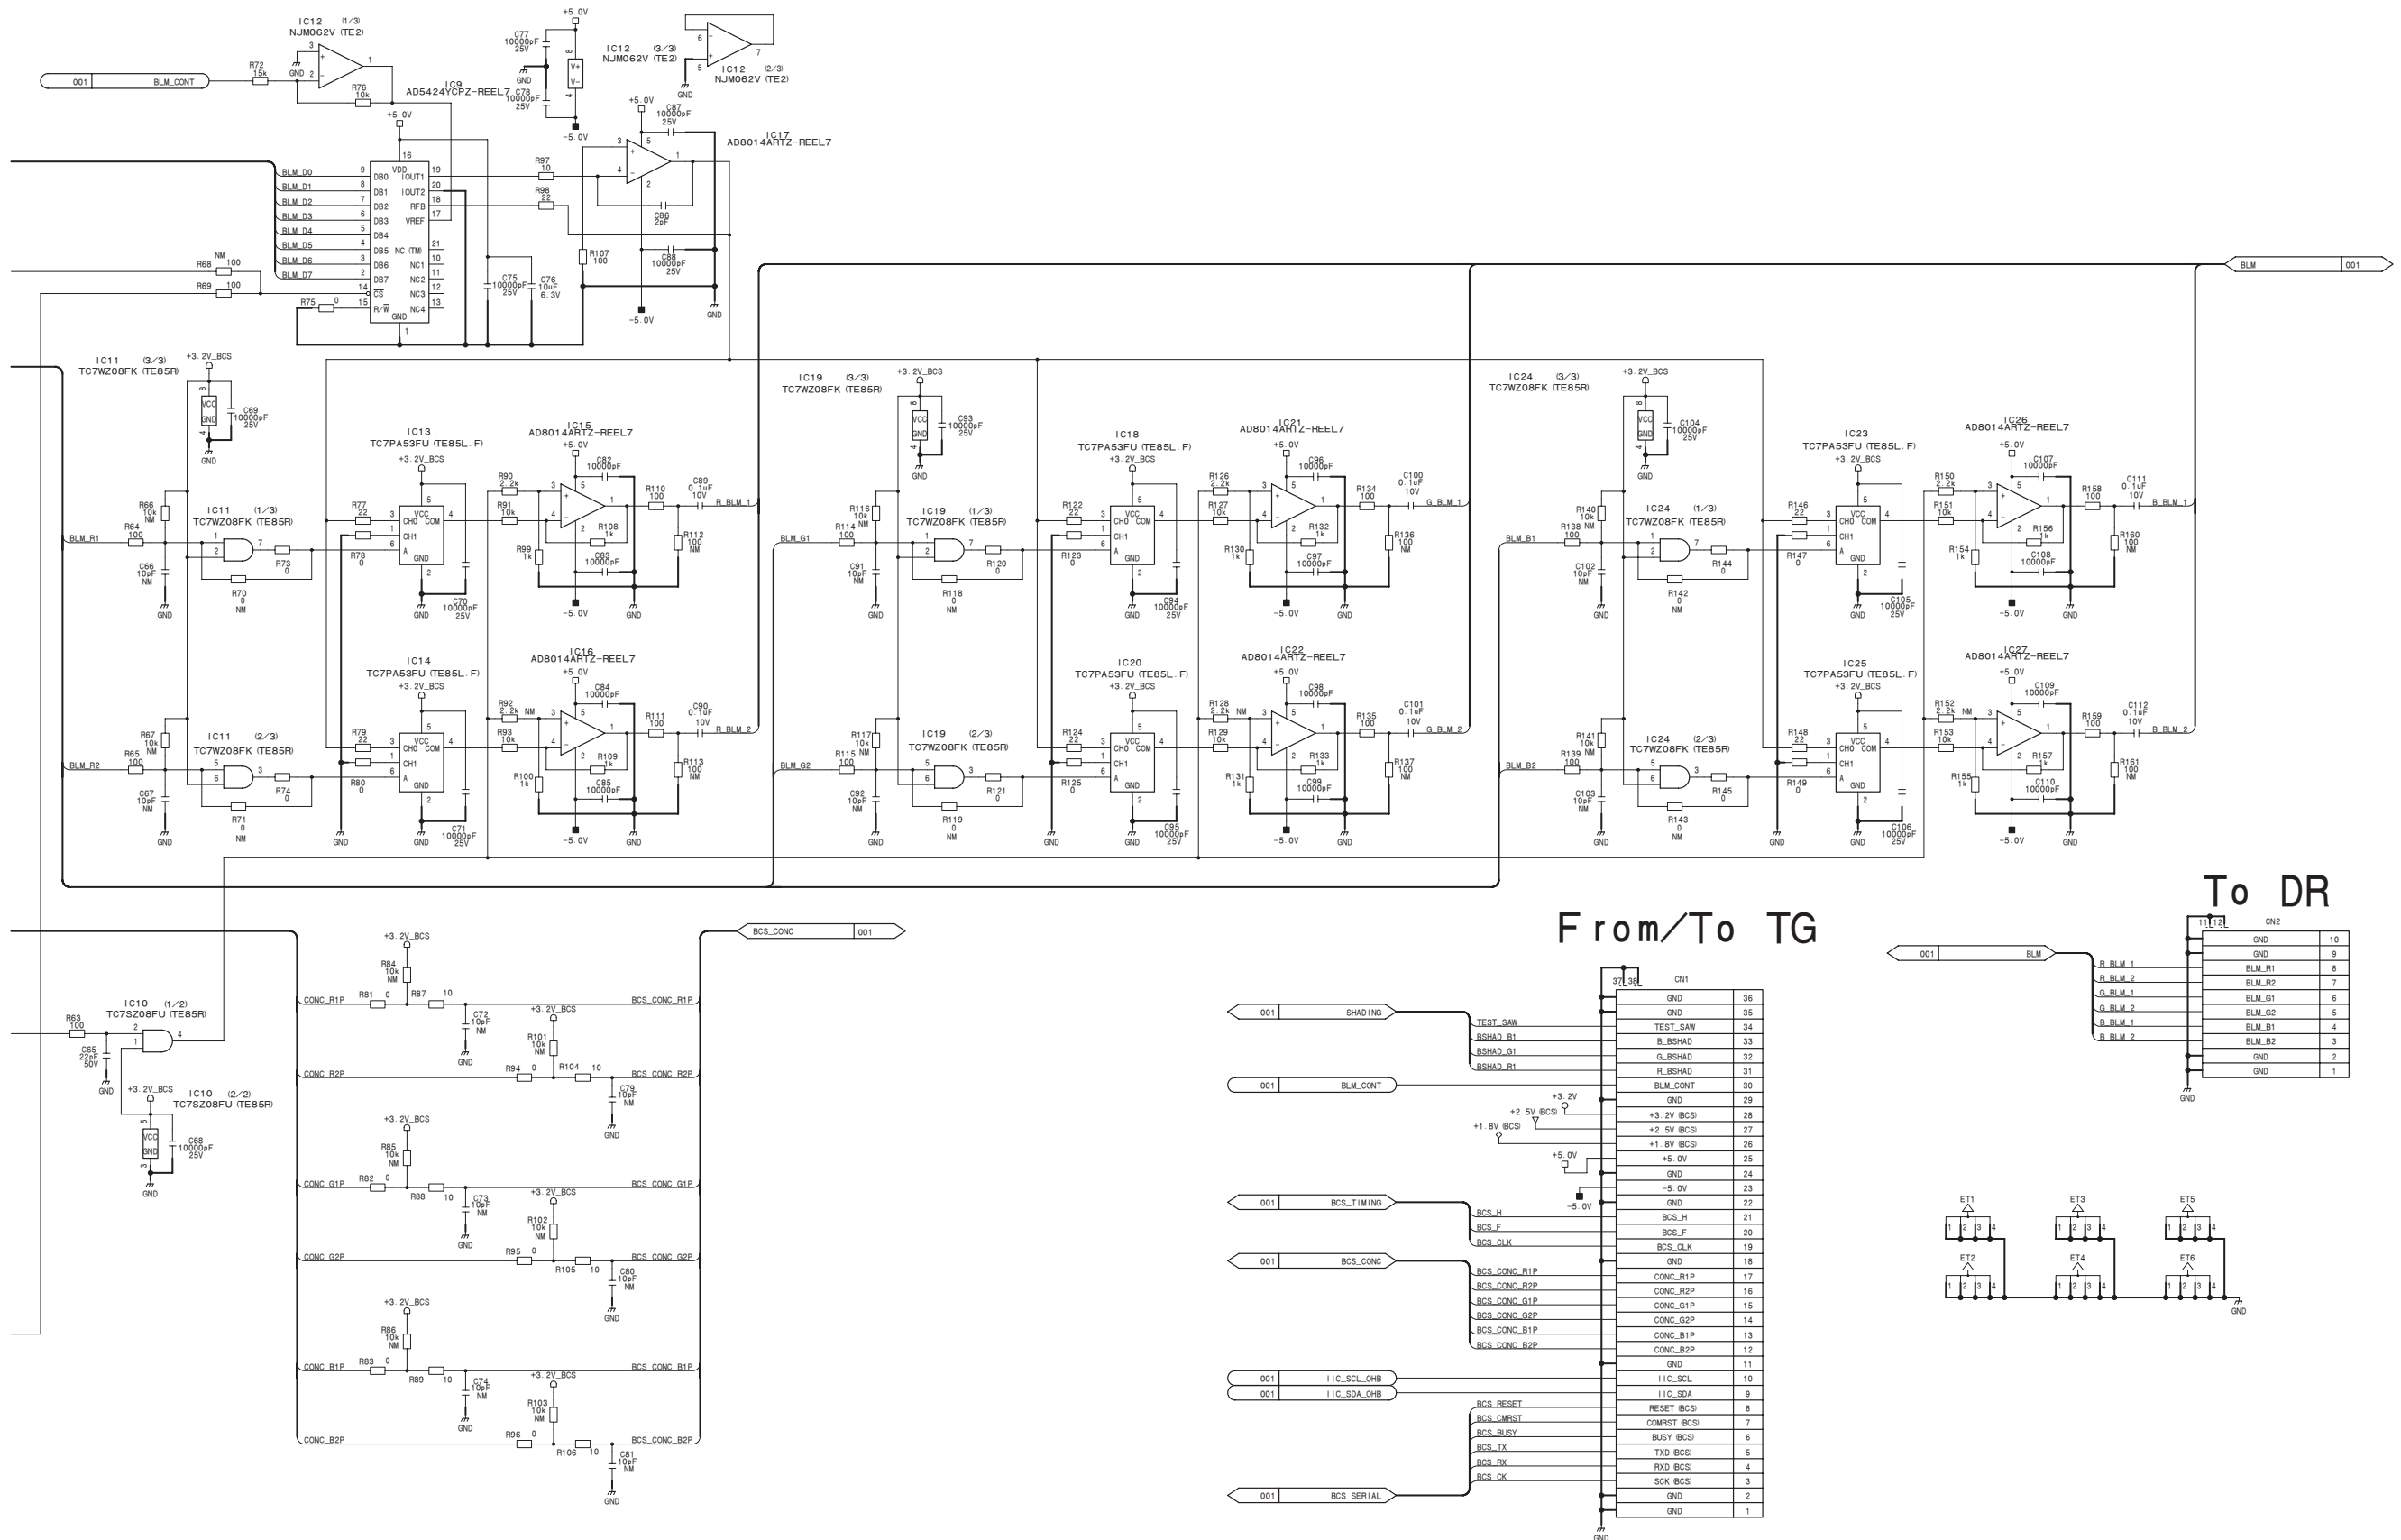

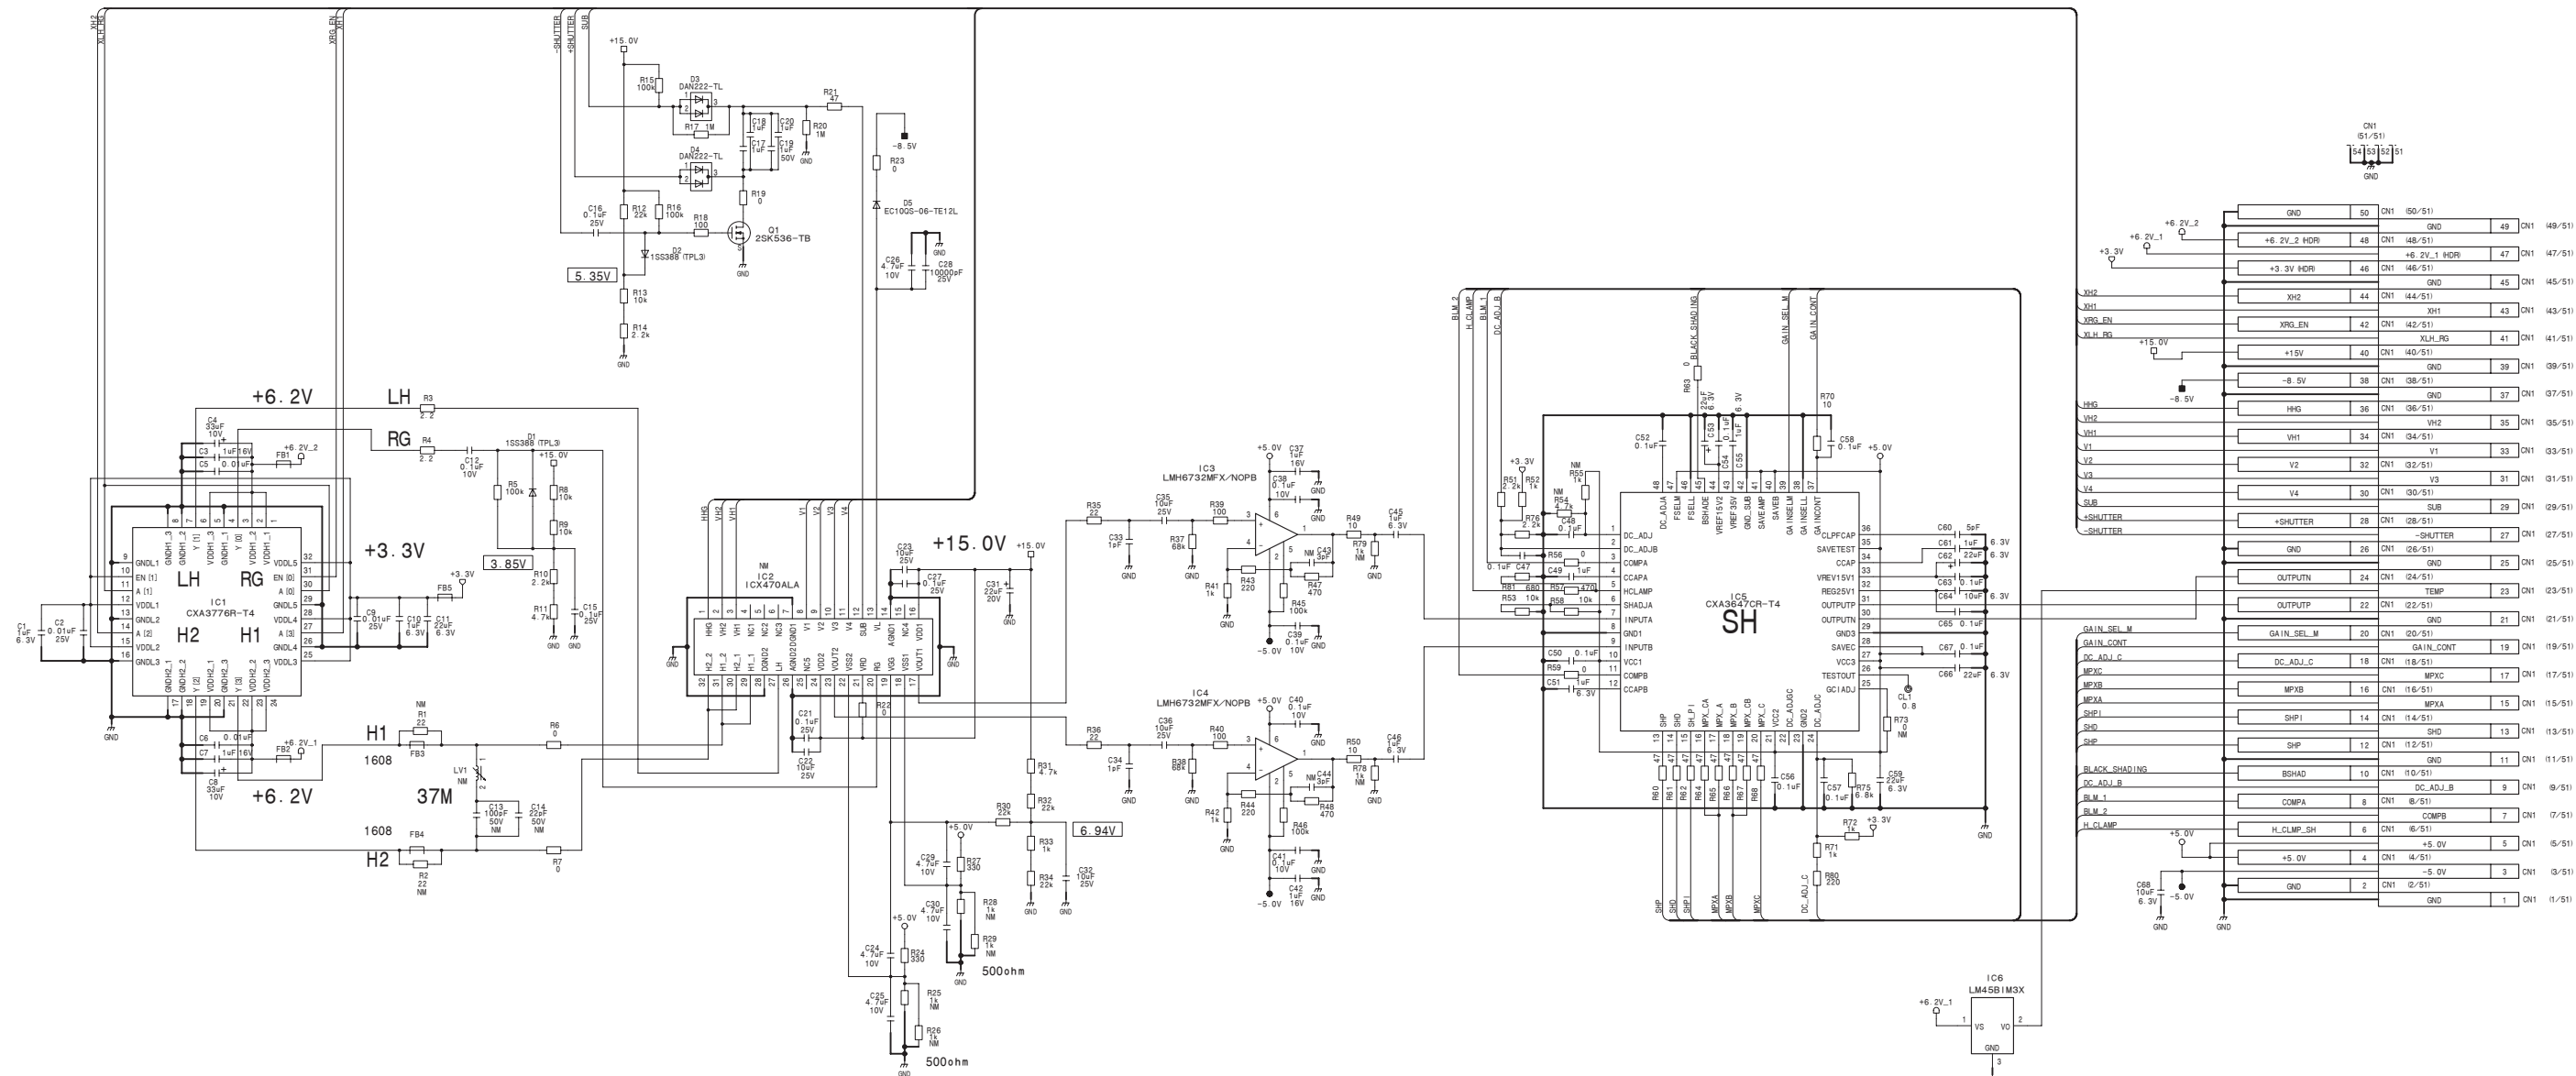


PA-353
BOARD NO. 1-879-601-11
HSC-300_PA-353_011_1

CN1	(176/200)	176	NC
CN1	(182/200)	182	NC
CN1	(184/200)	184	(LENS-Un reg)
CN1	(186/200)	186	(LENS-Un reg)
CN1	(188/200)	188	
CN1	(190/200)	190	
CN1	(192/200)	192	(LENS-GND)
CN1	(194/200)	194	(LENS-GND)
CN1	(196/200)	196	NC

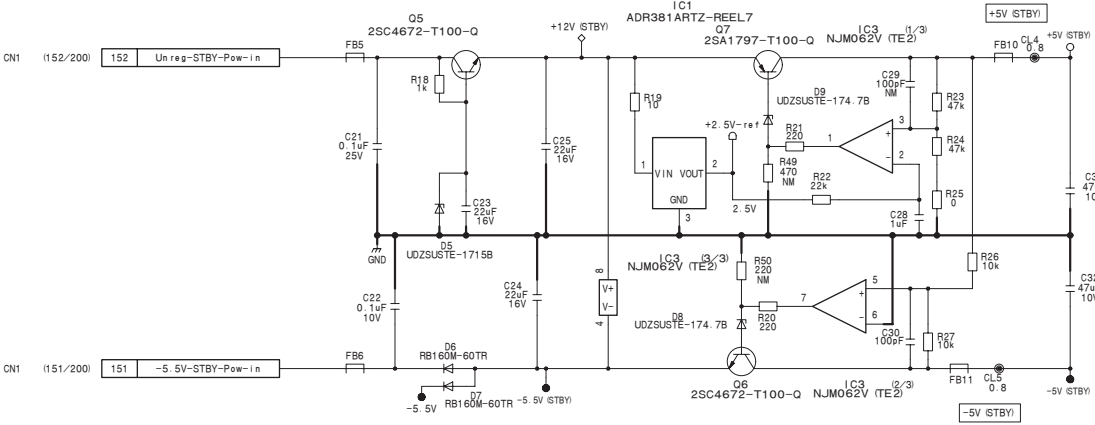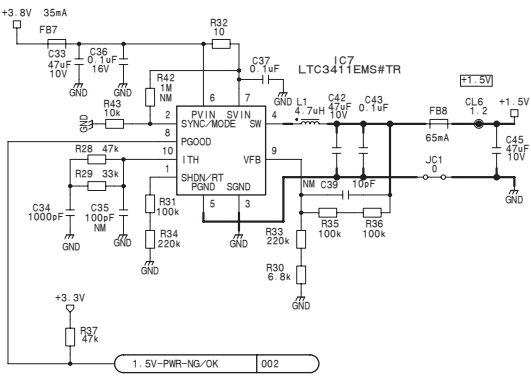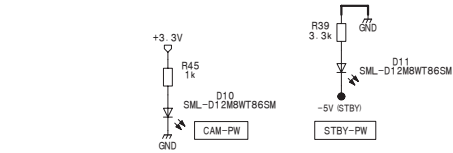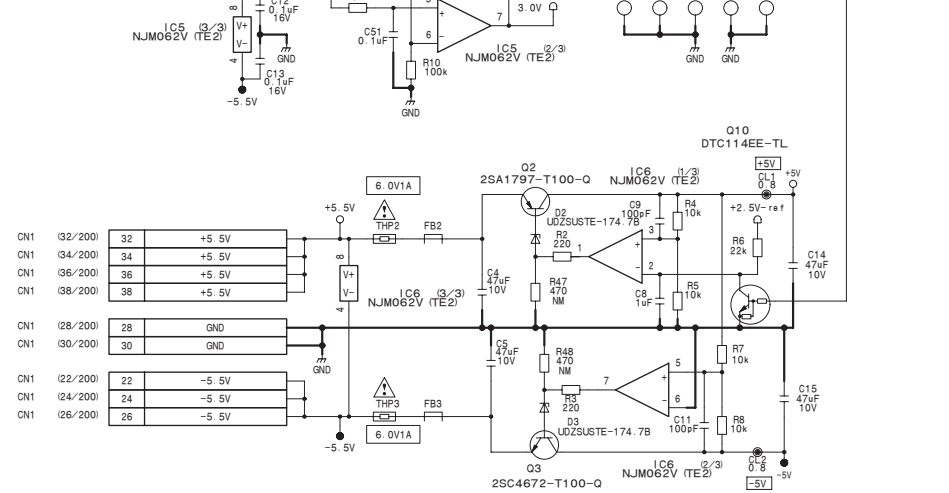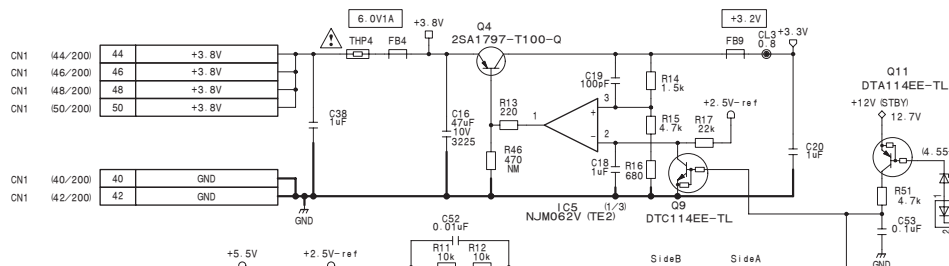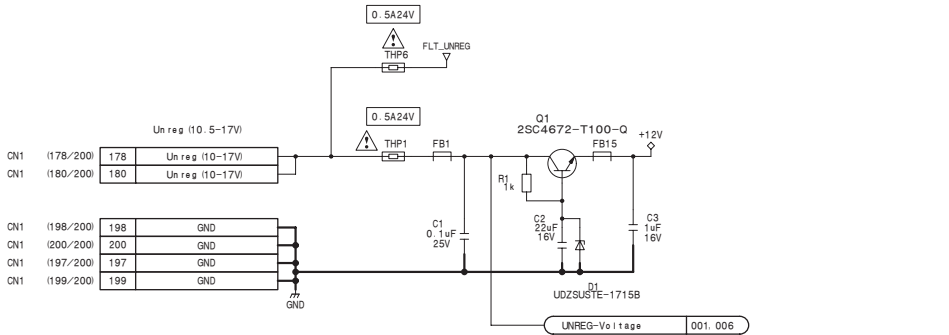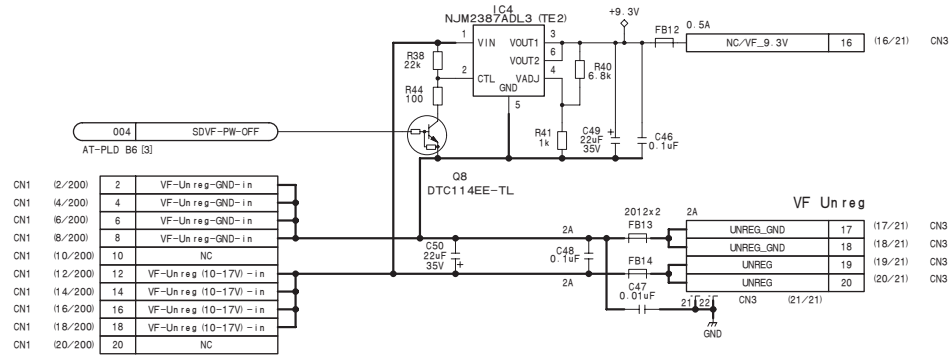

3-56

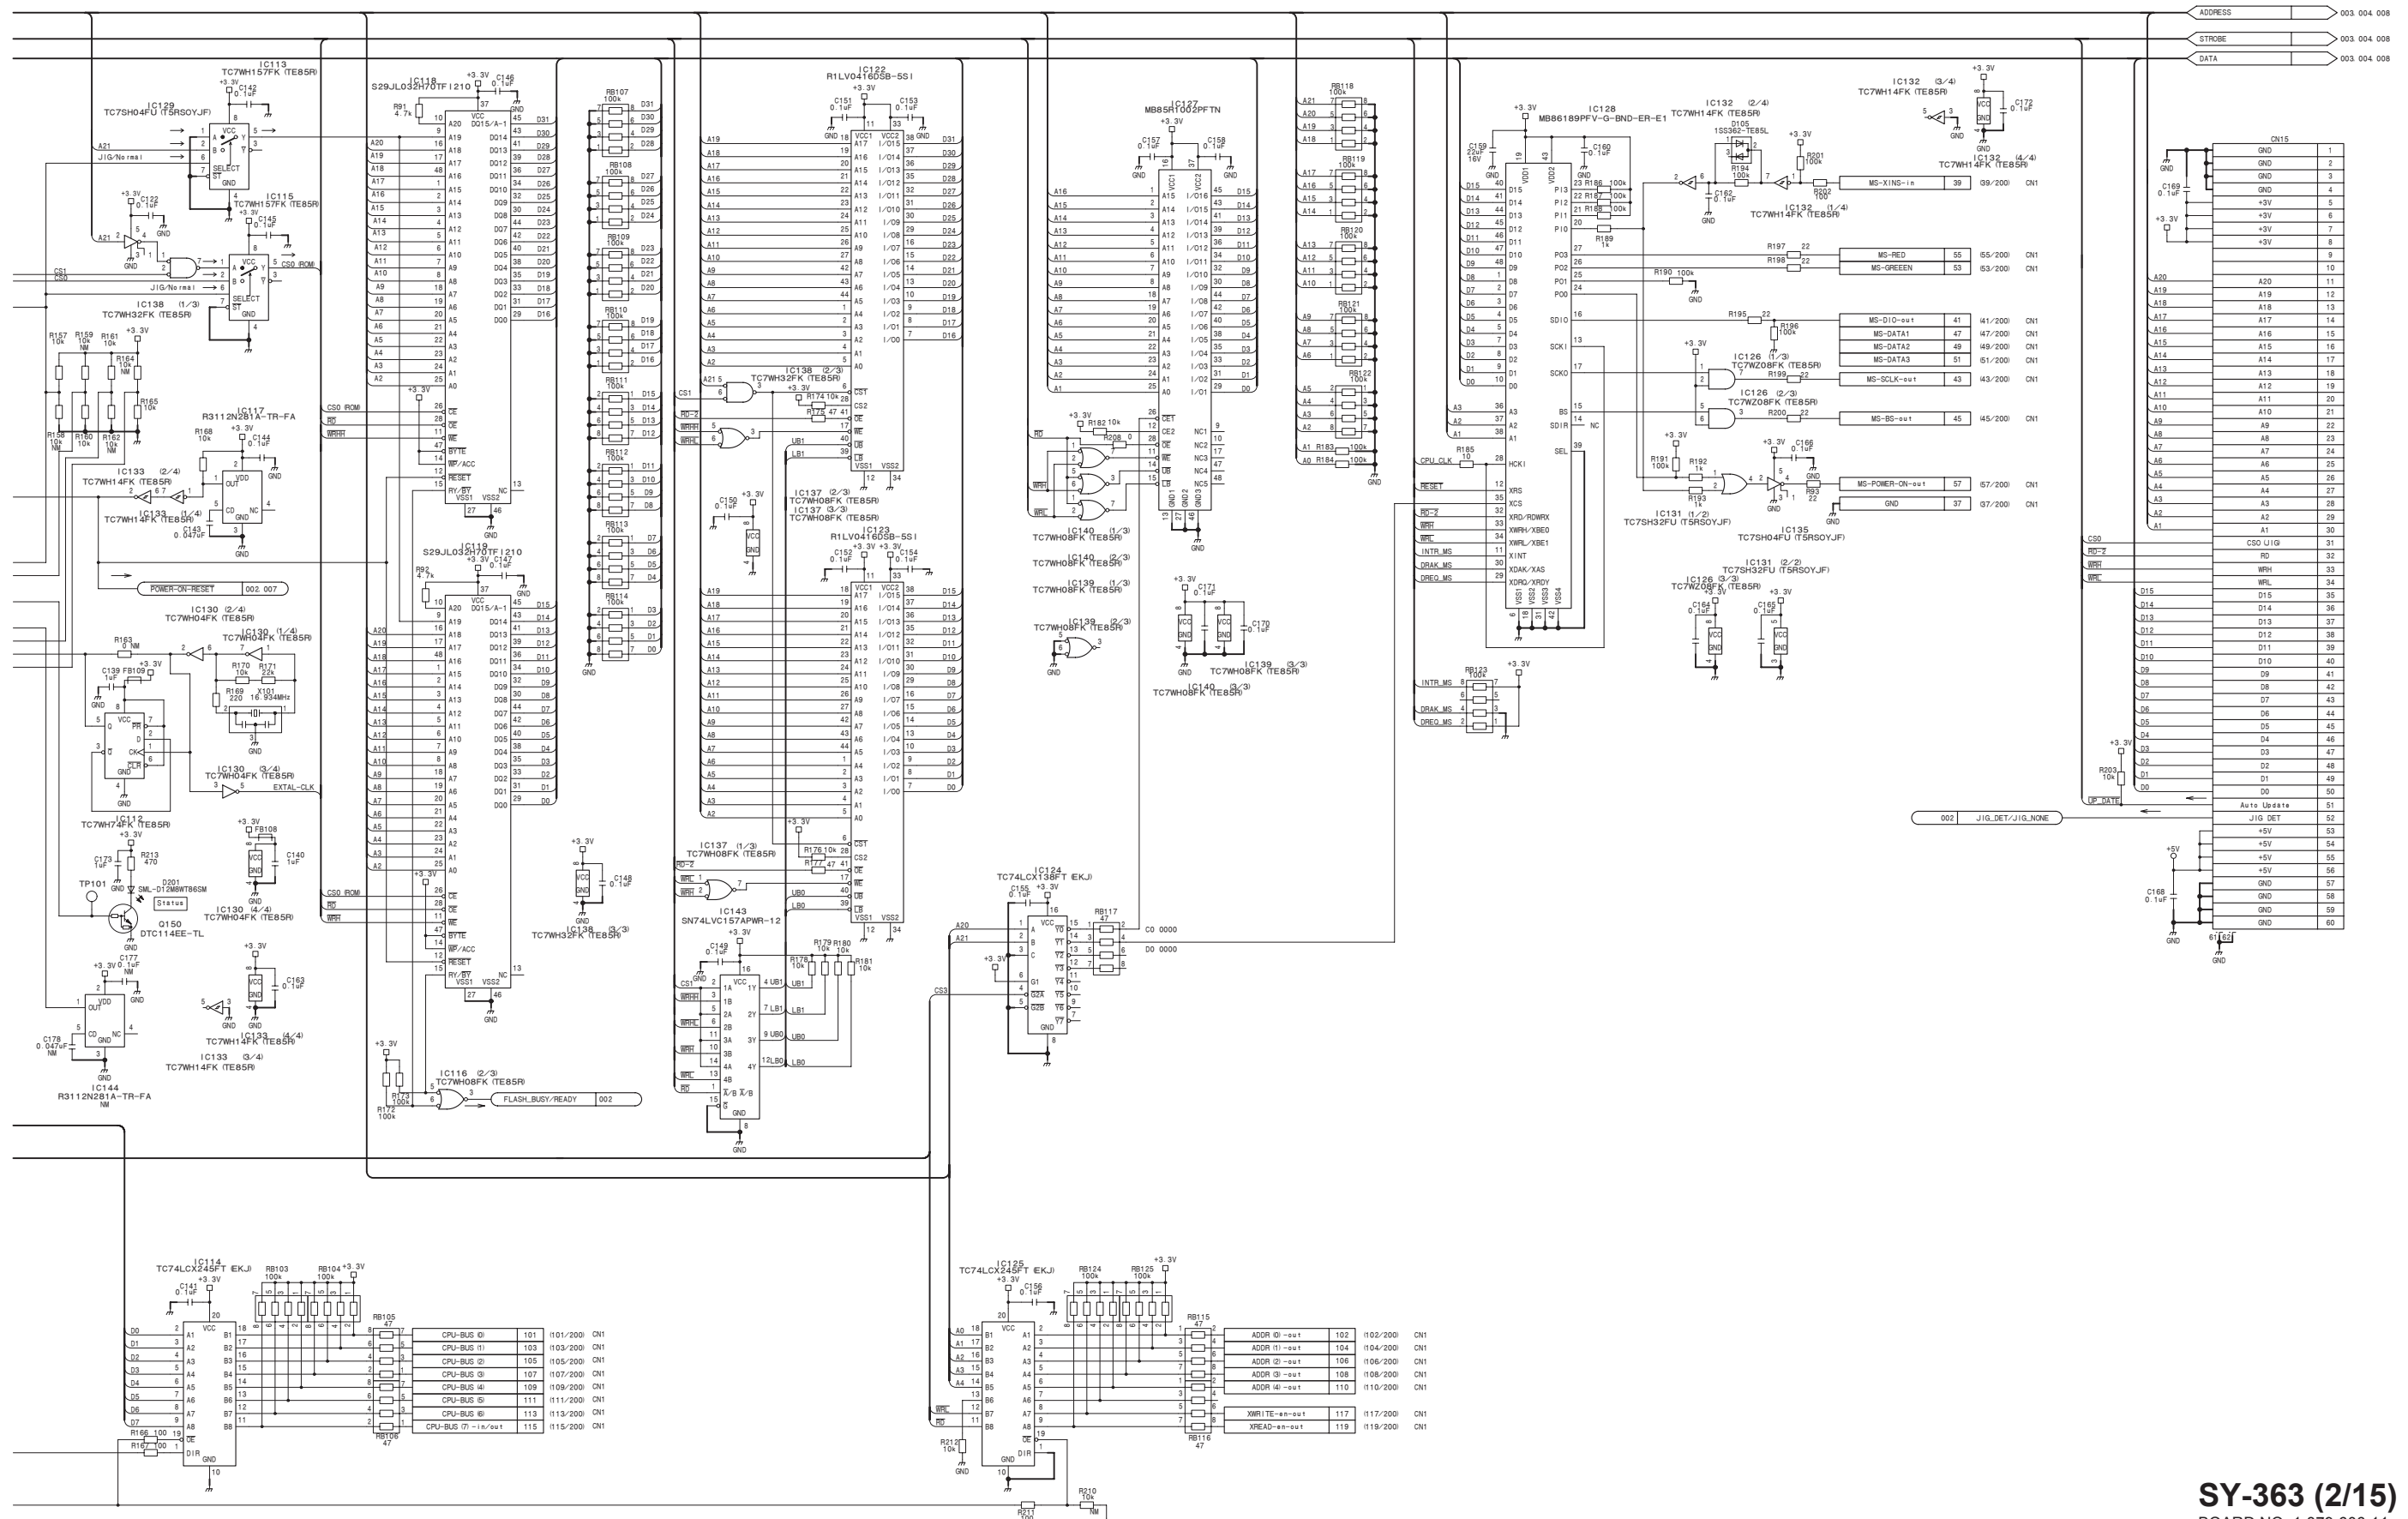



1


2

3


4

5

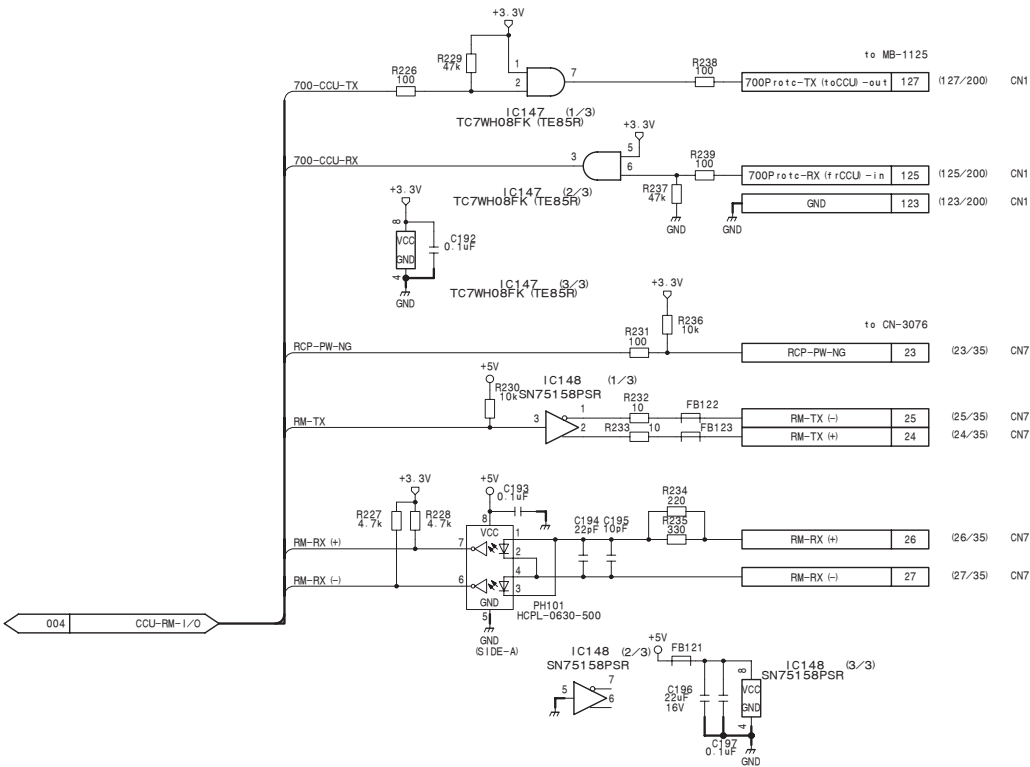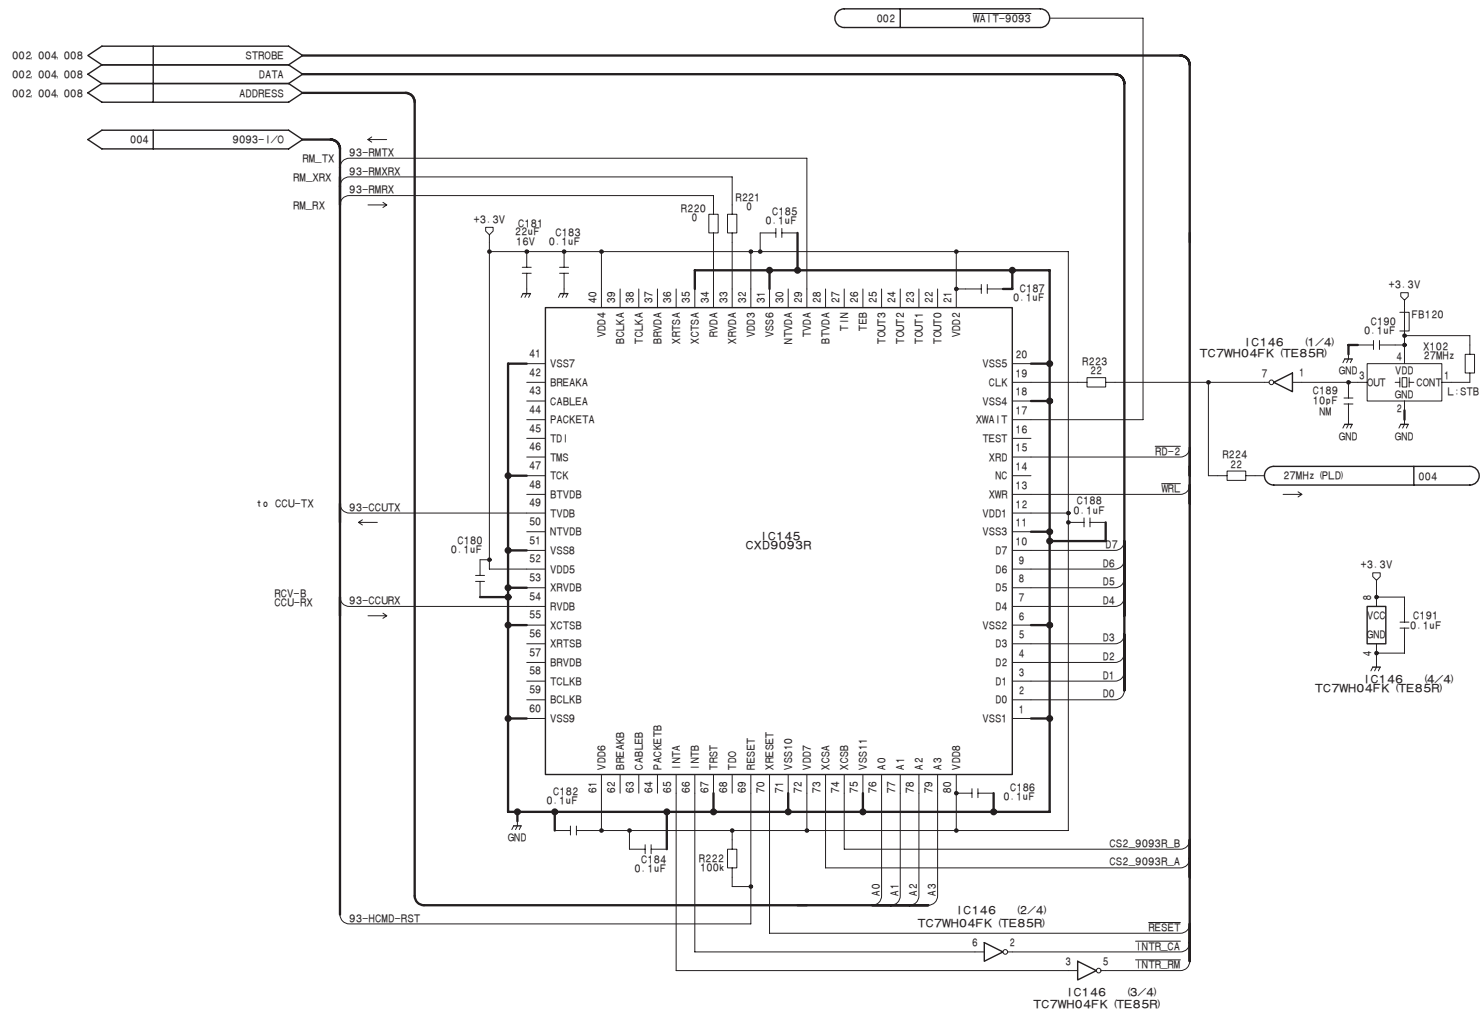


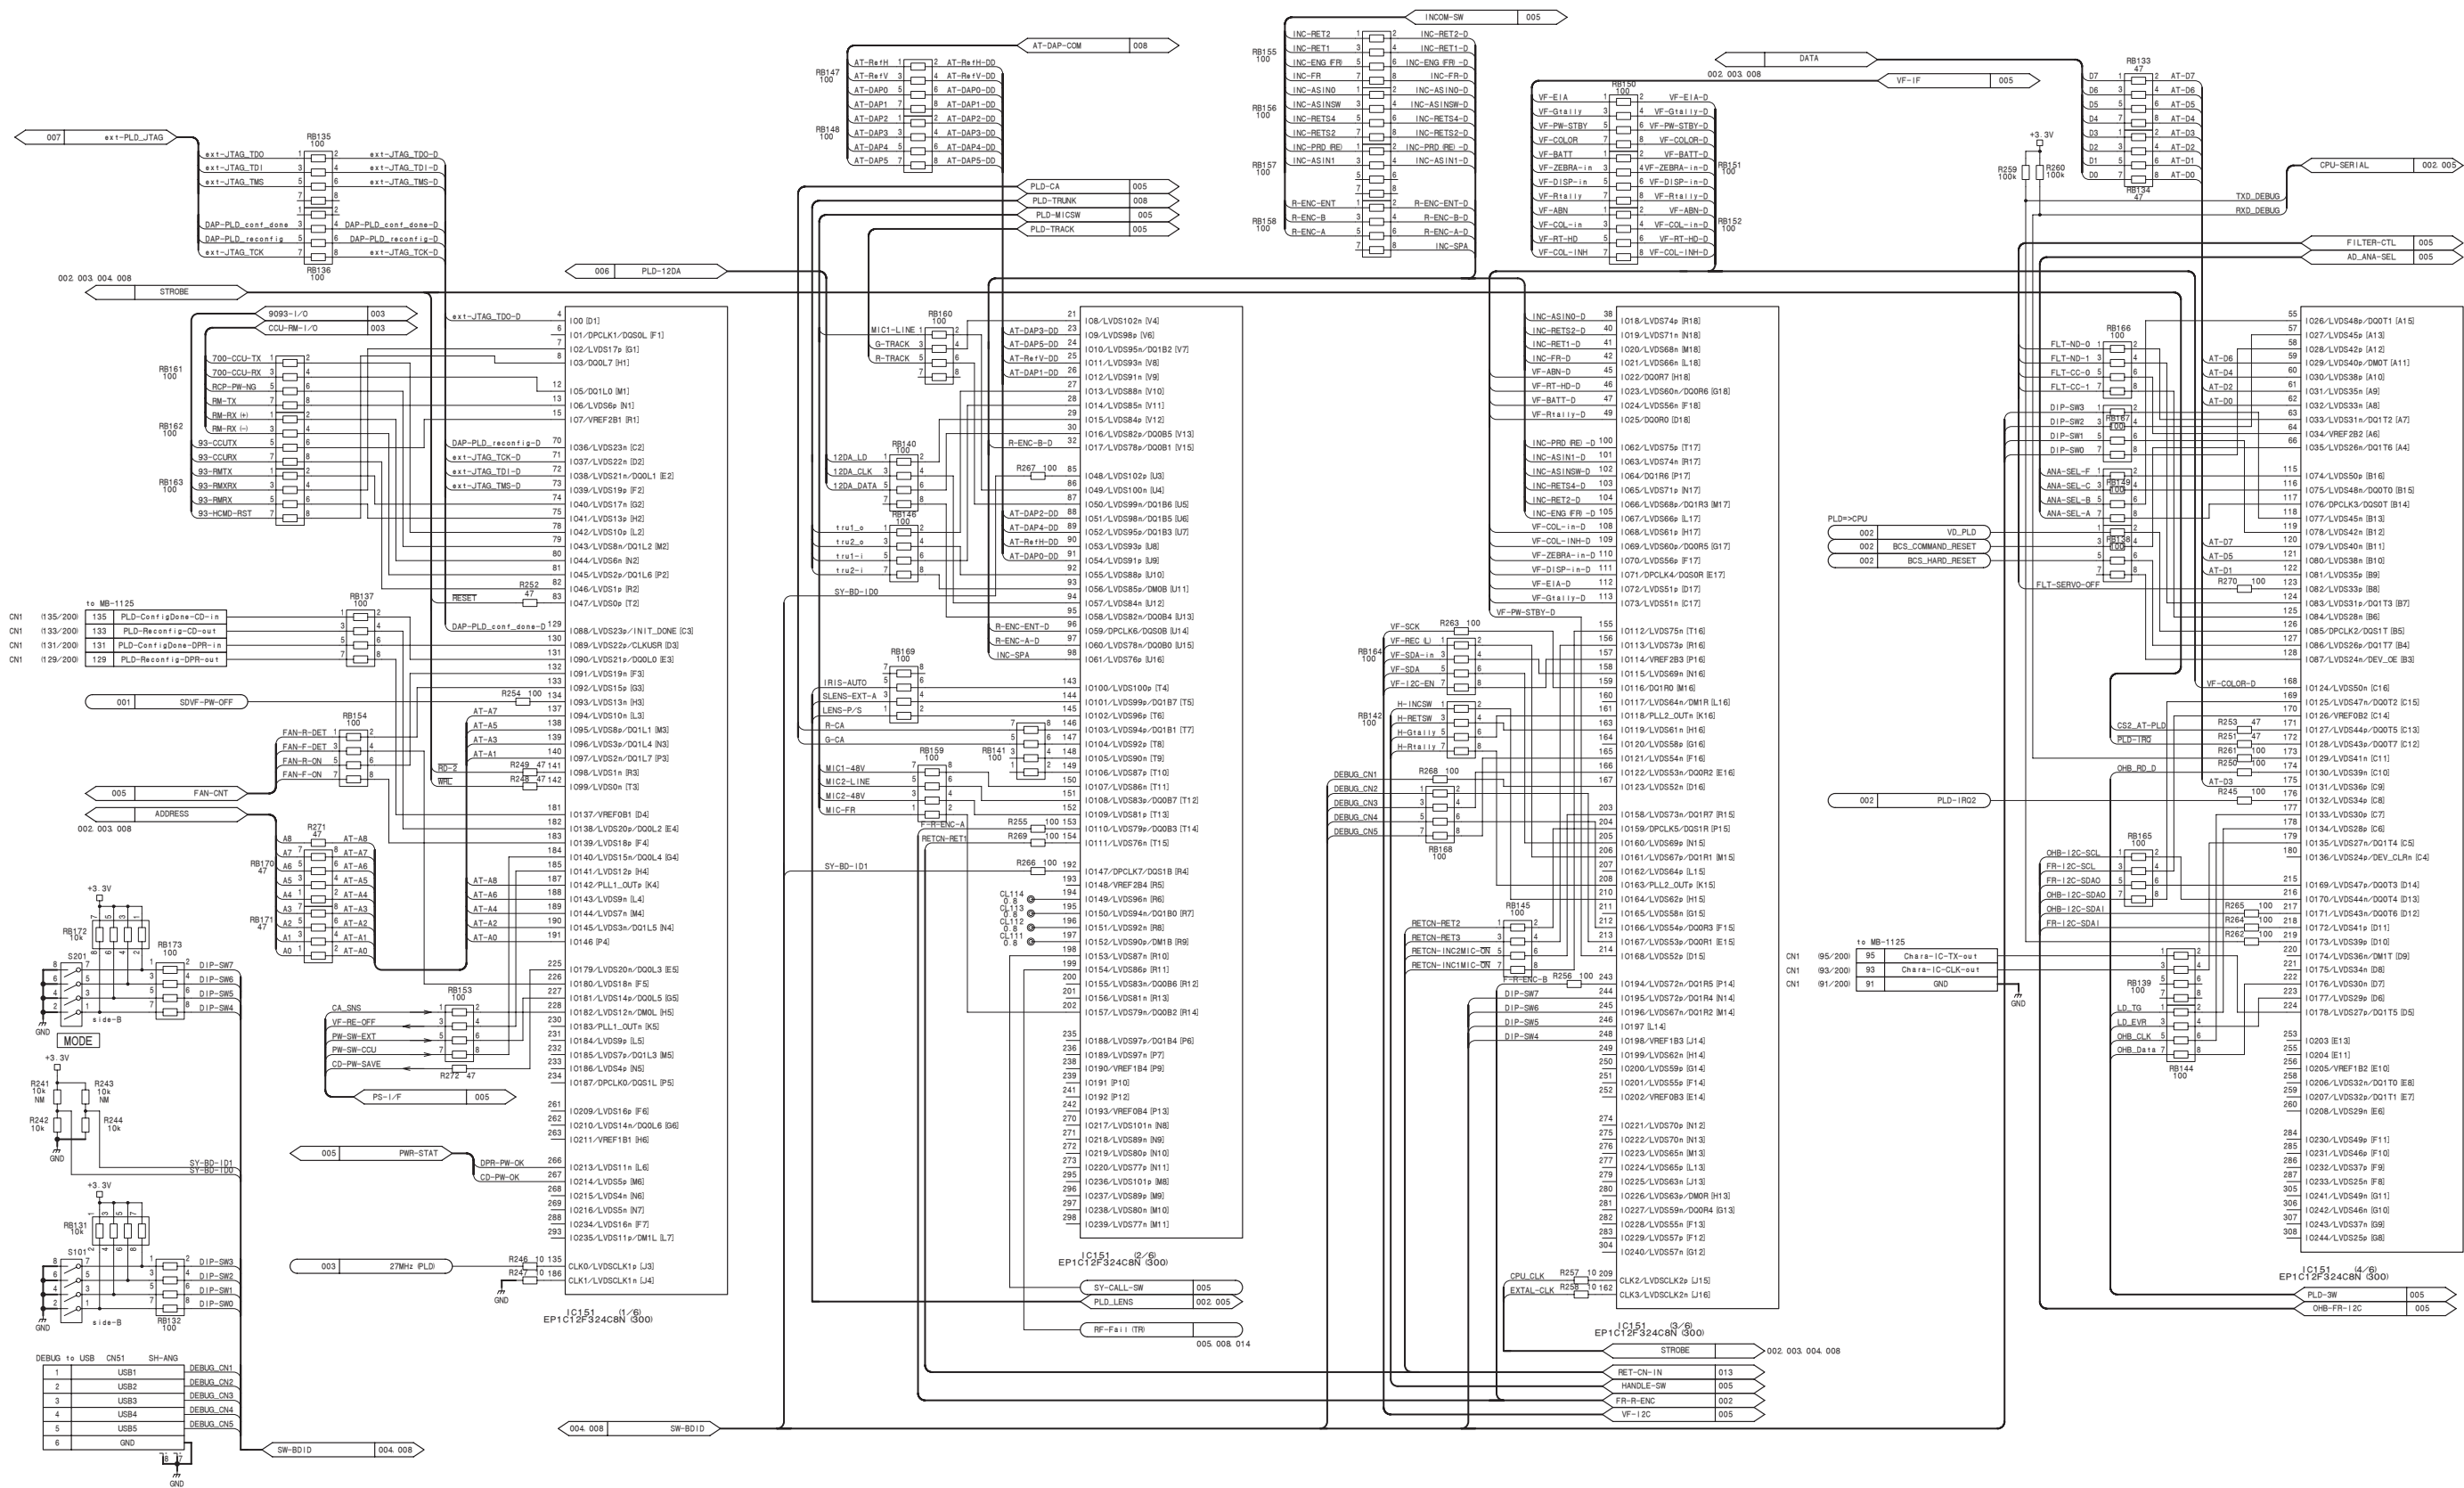


HD/SD VF I/F

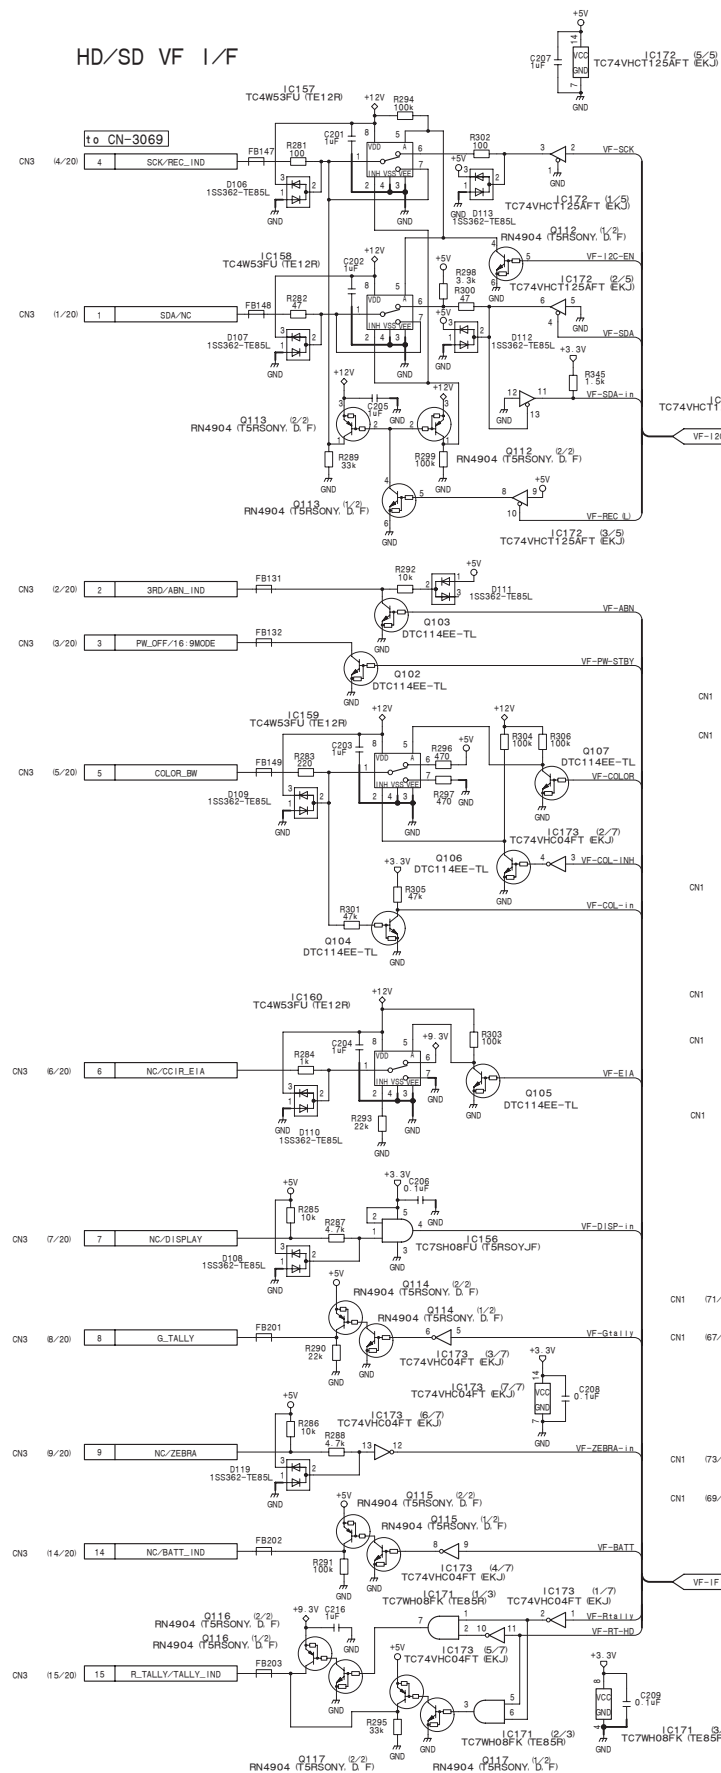

FAN Control

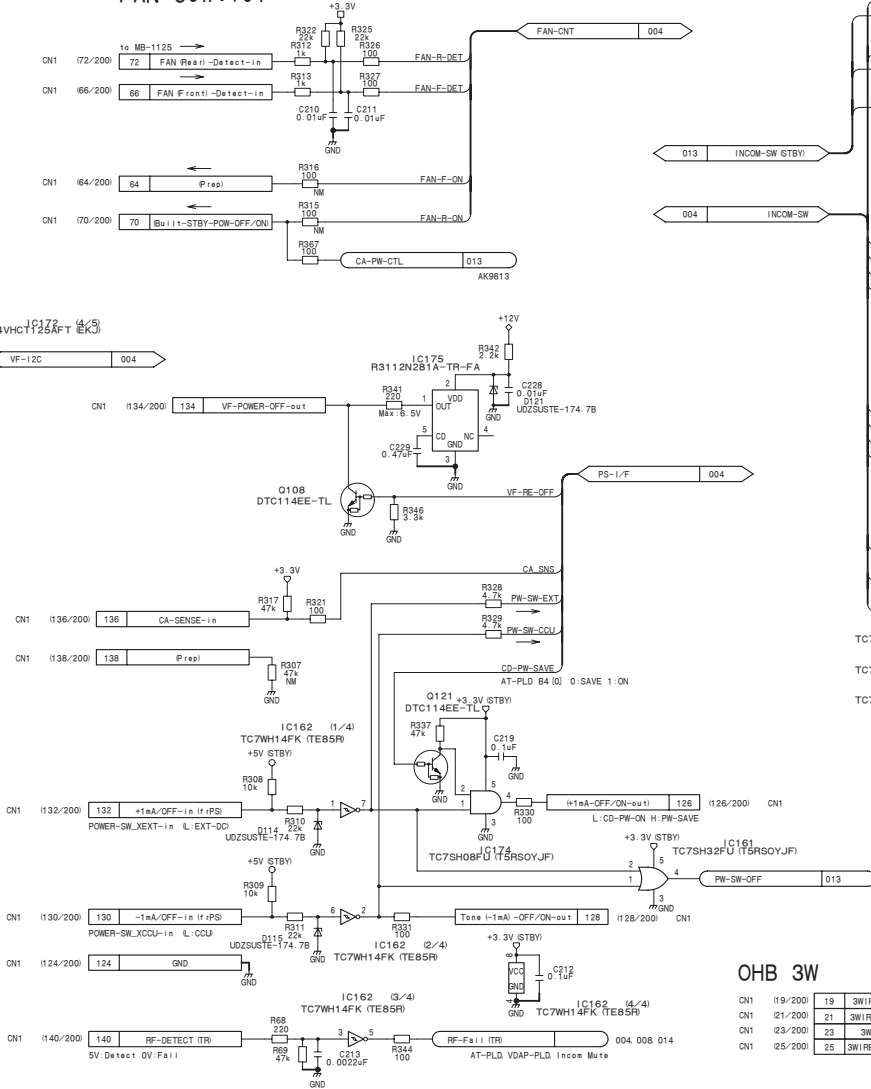


OHB/Front I2C

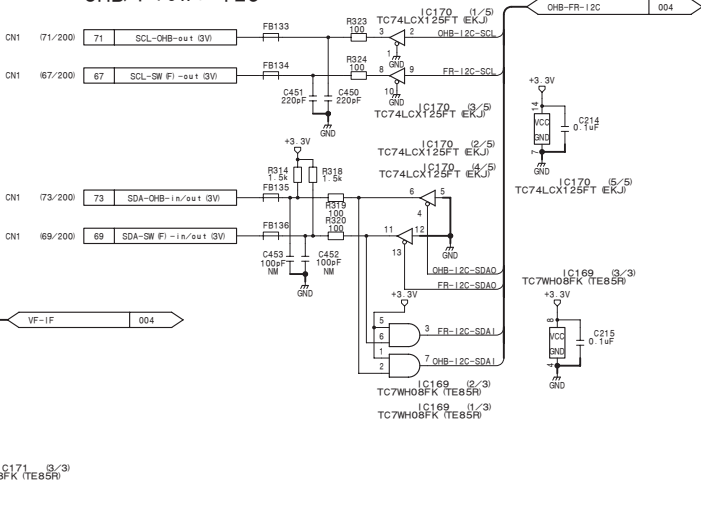



OHB 3W



Power Status







Filter Control (HSC-300)

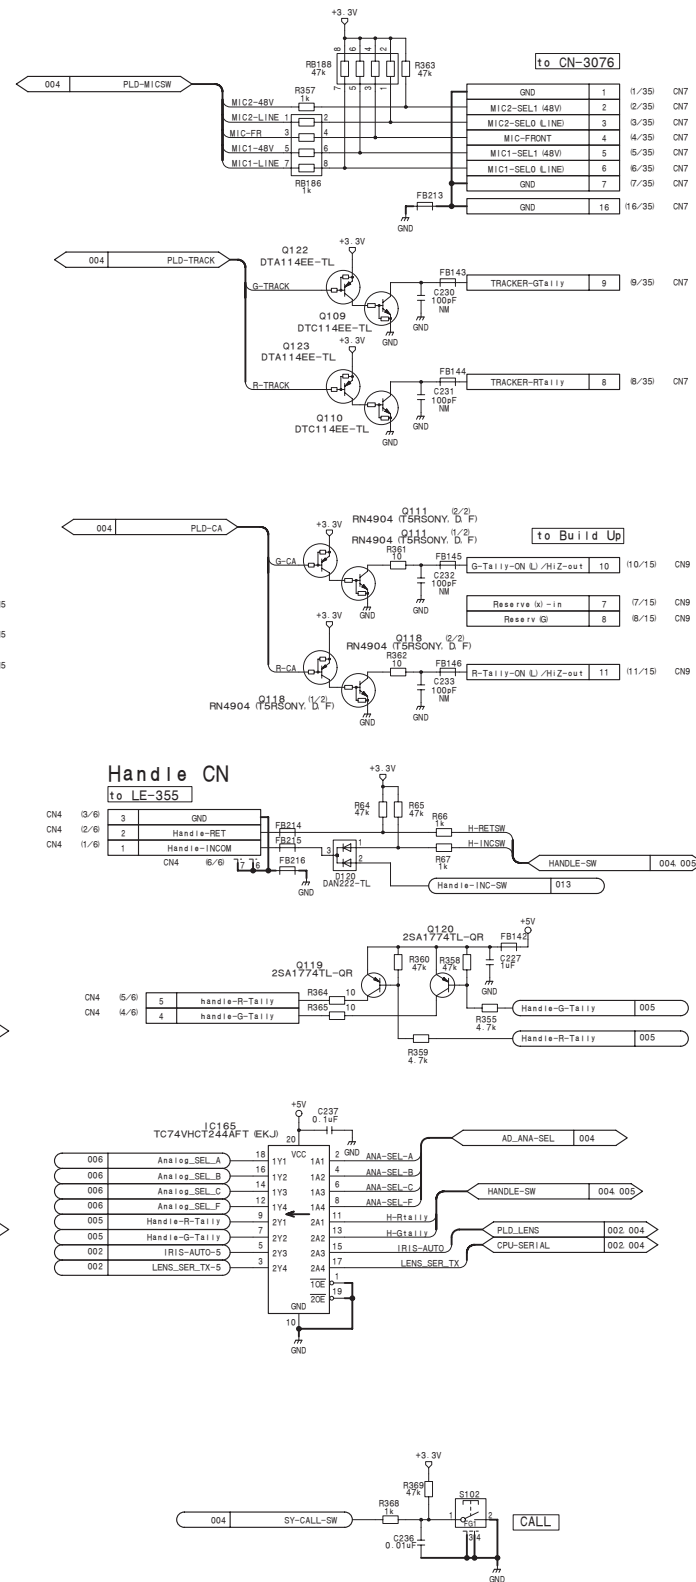
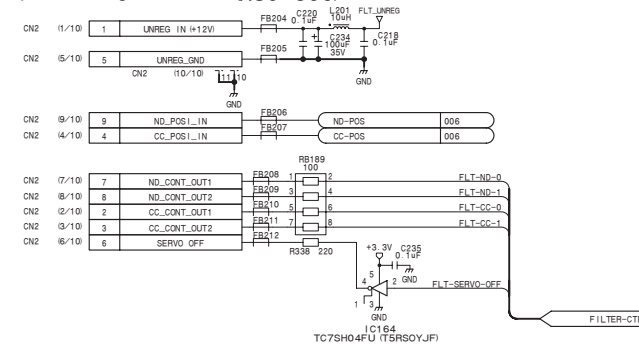



SY-363 (5/15)

BOARD NO. 1-879-606-11
HSC-300_SY363_011_5



HSC-300/V2 (J, E)

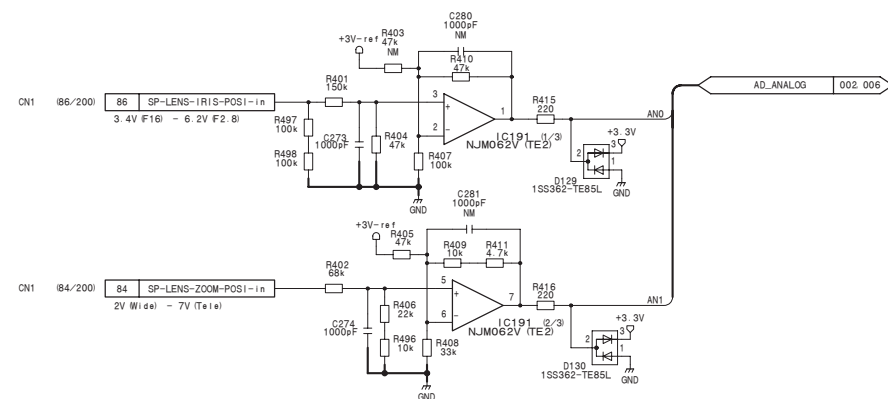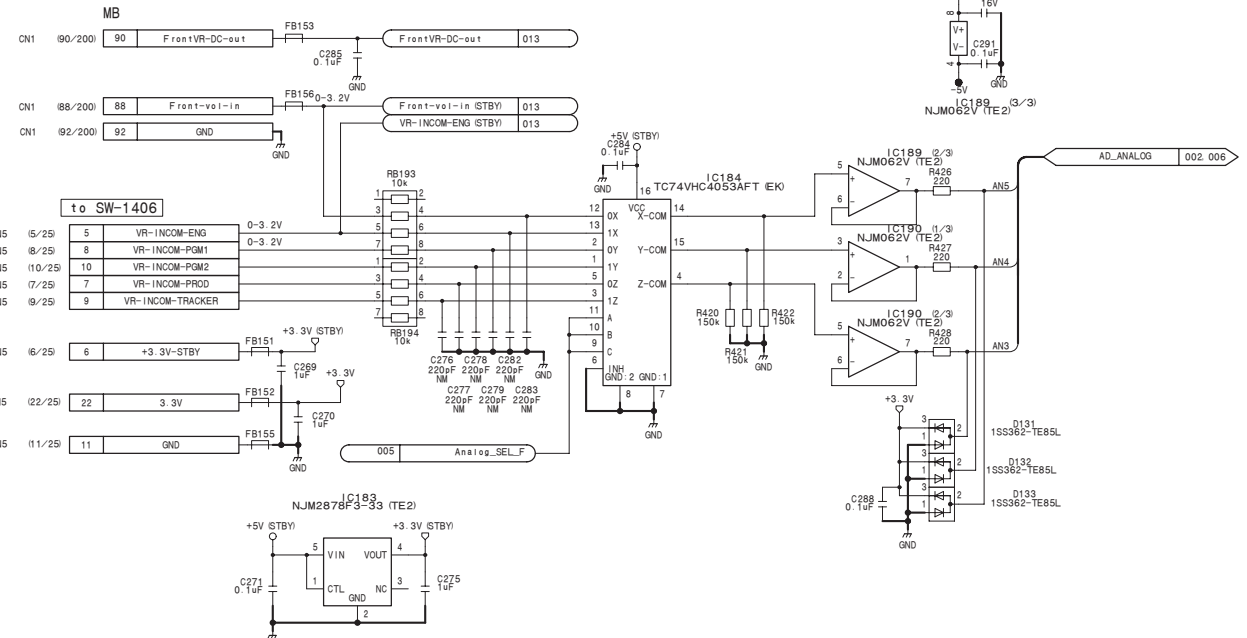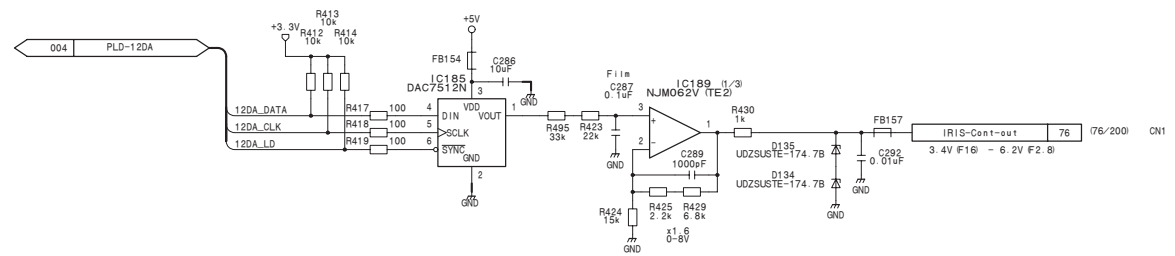

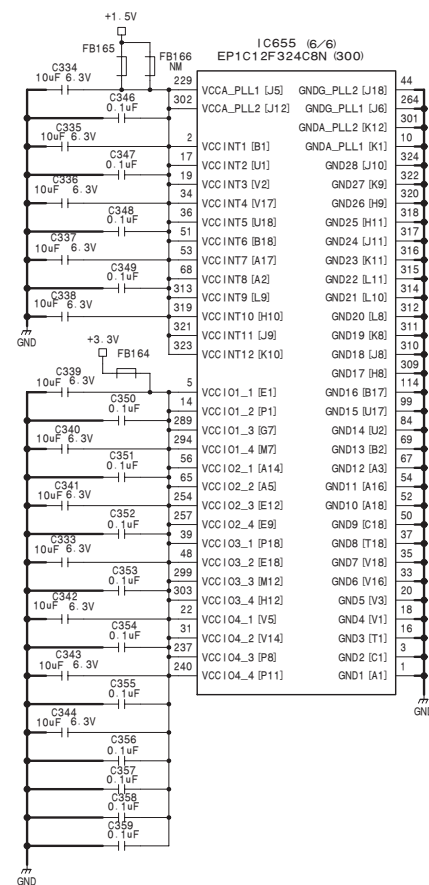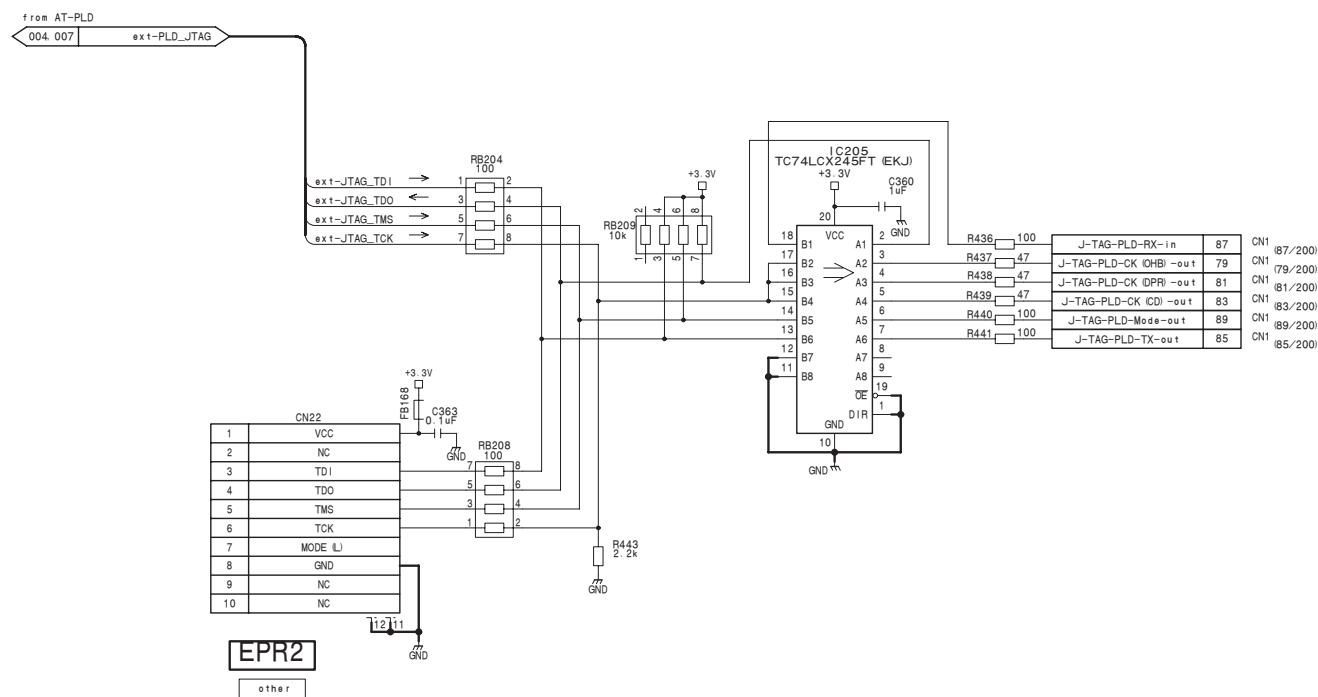






5

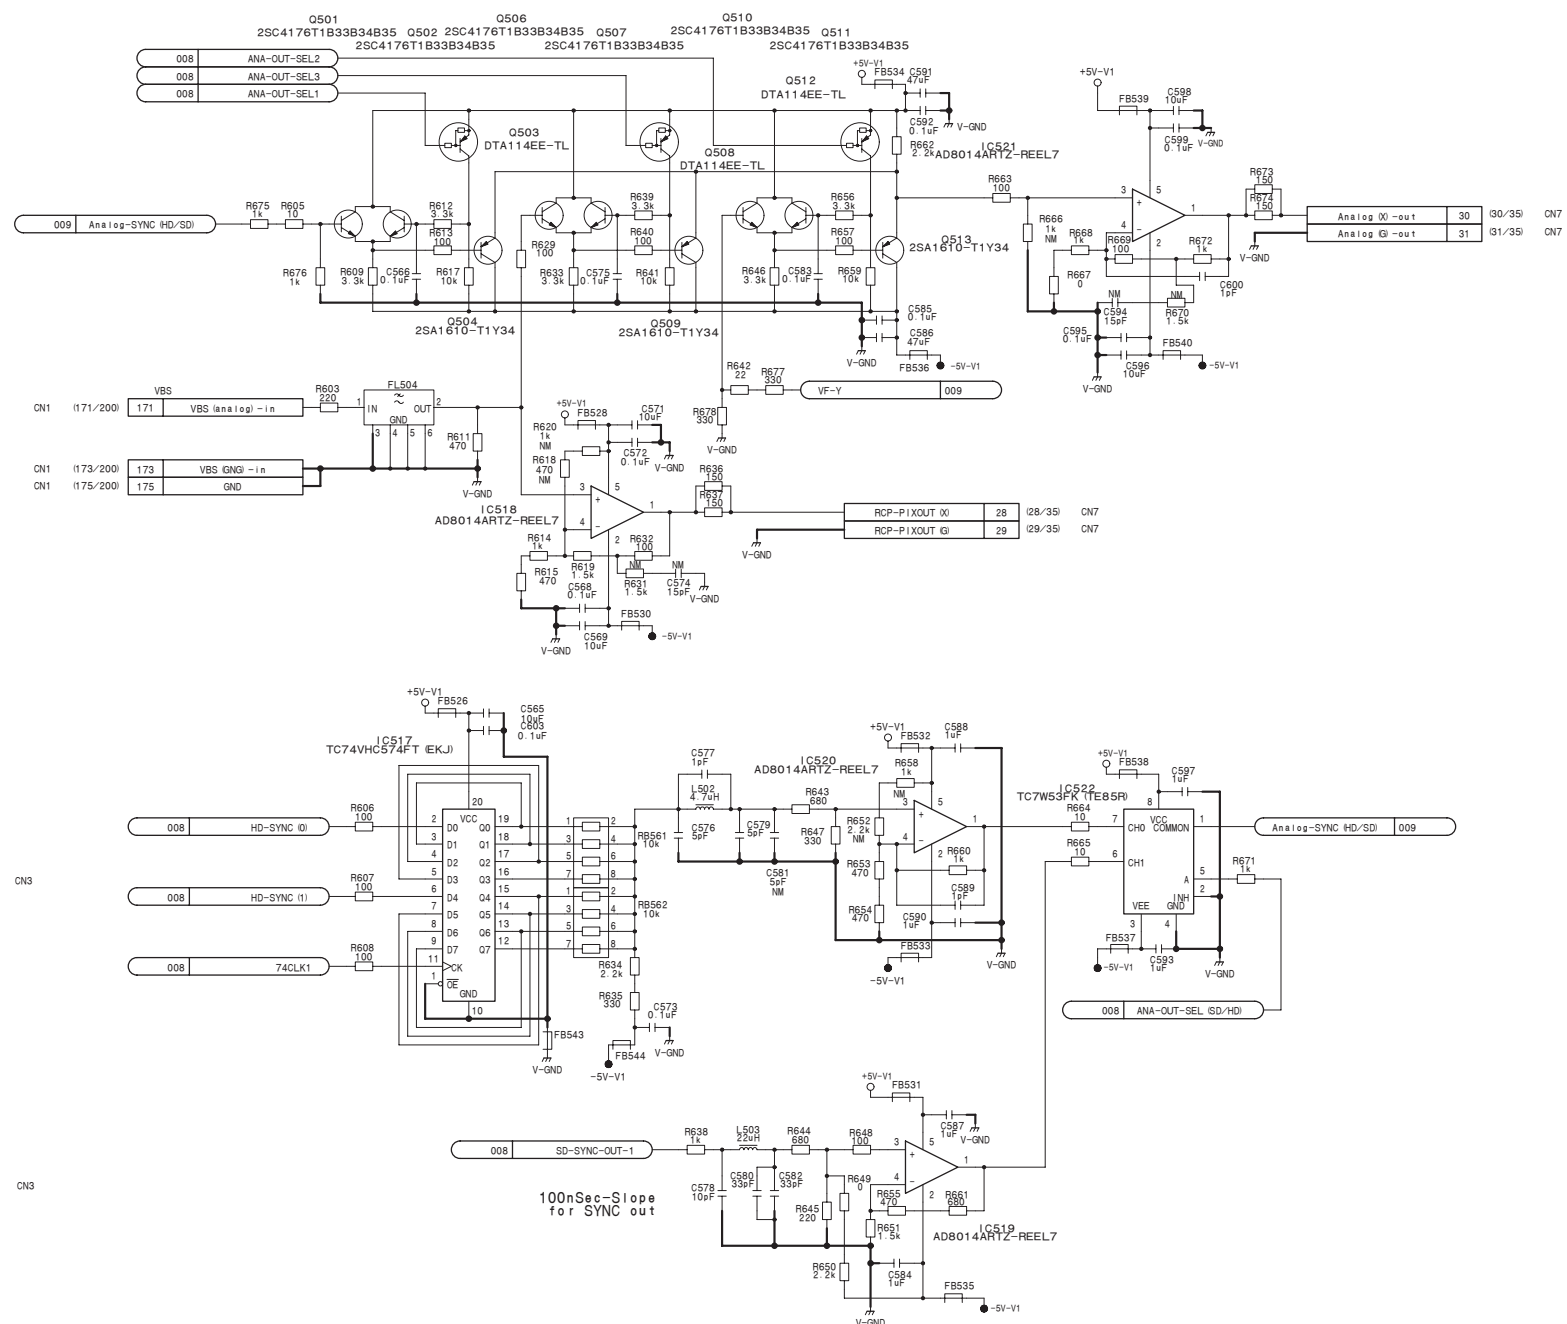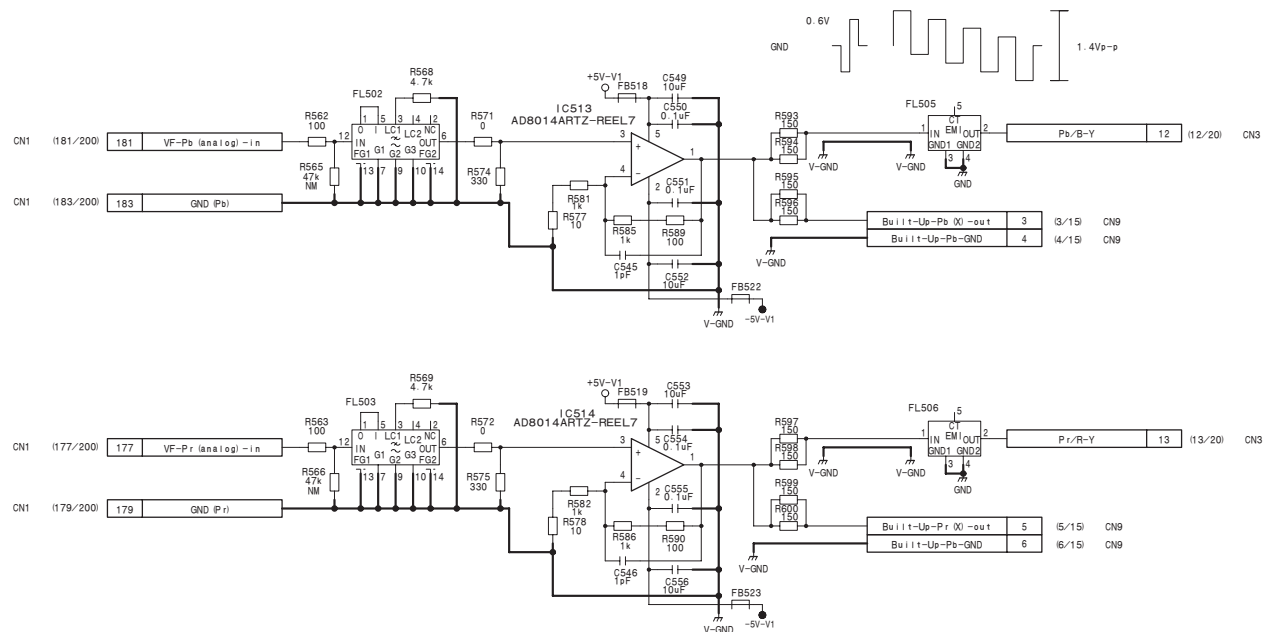

HSC-300/V2 (J, E)

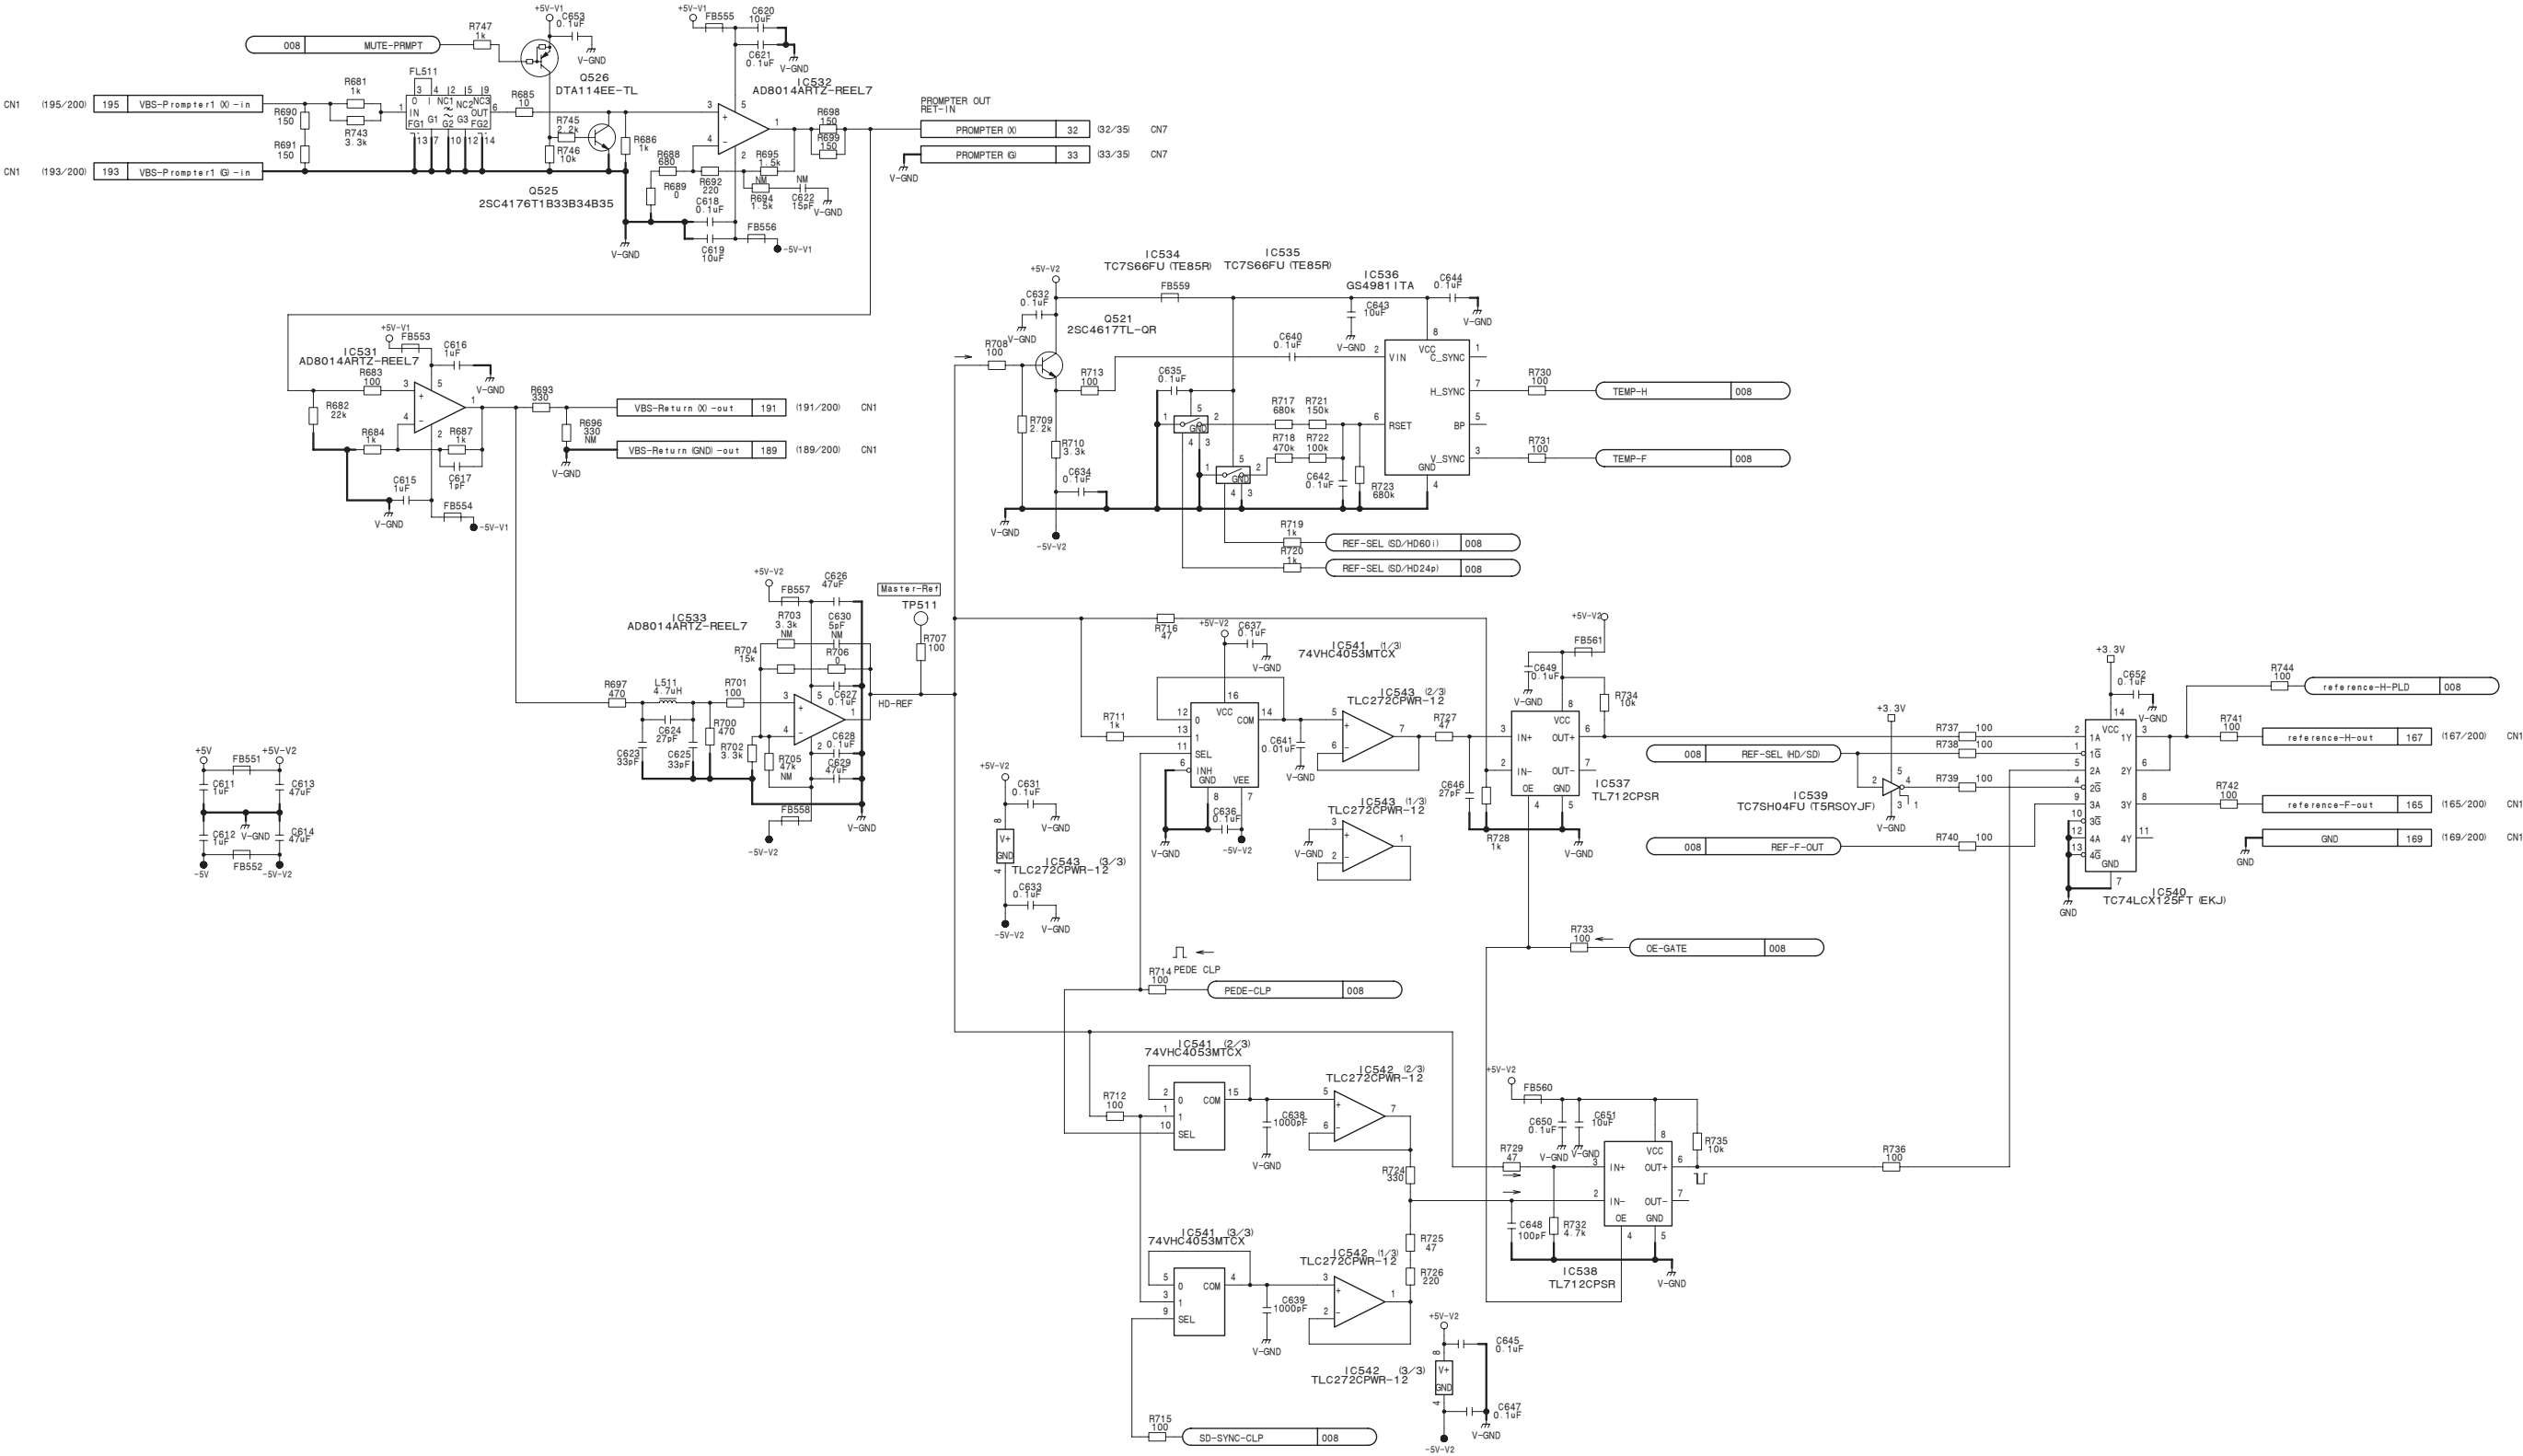




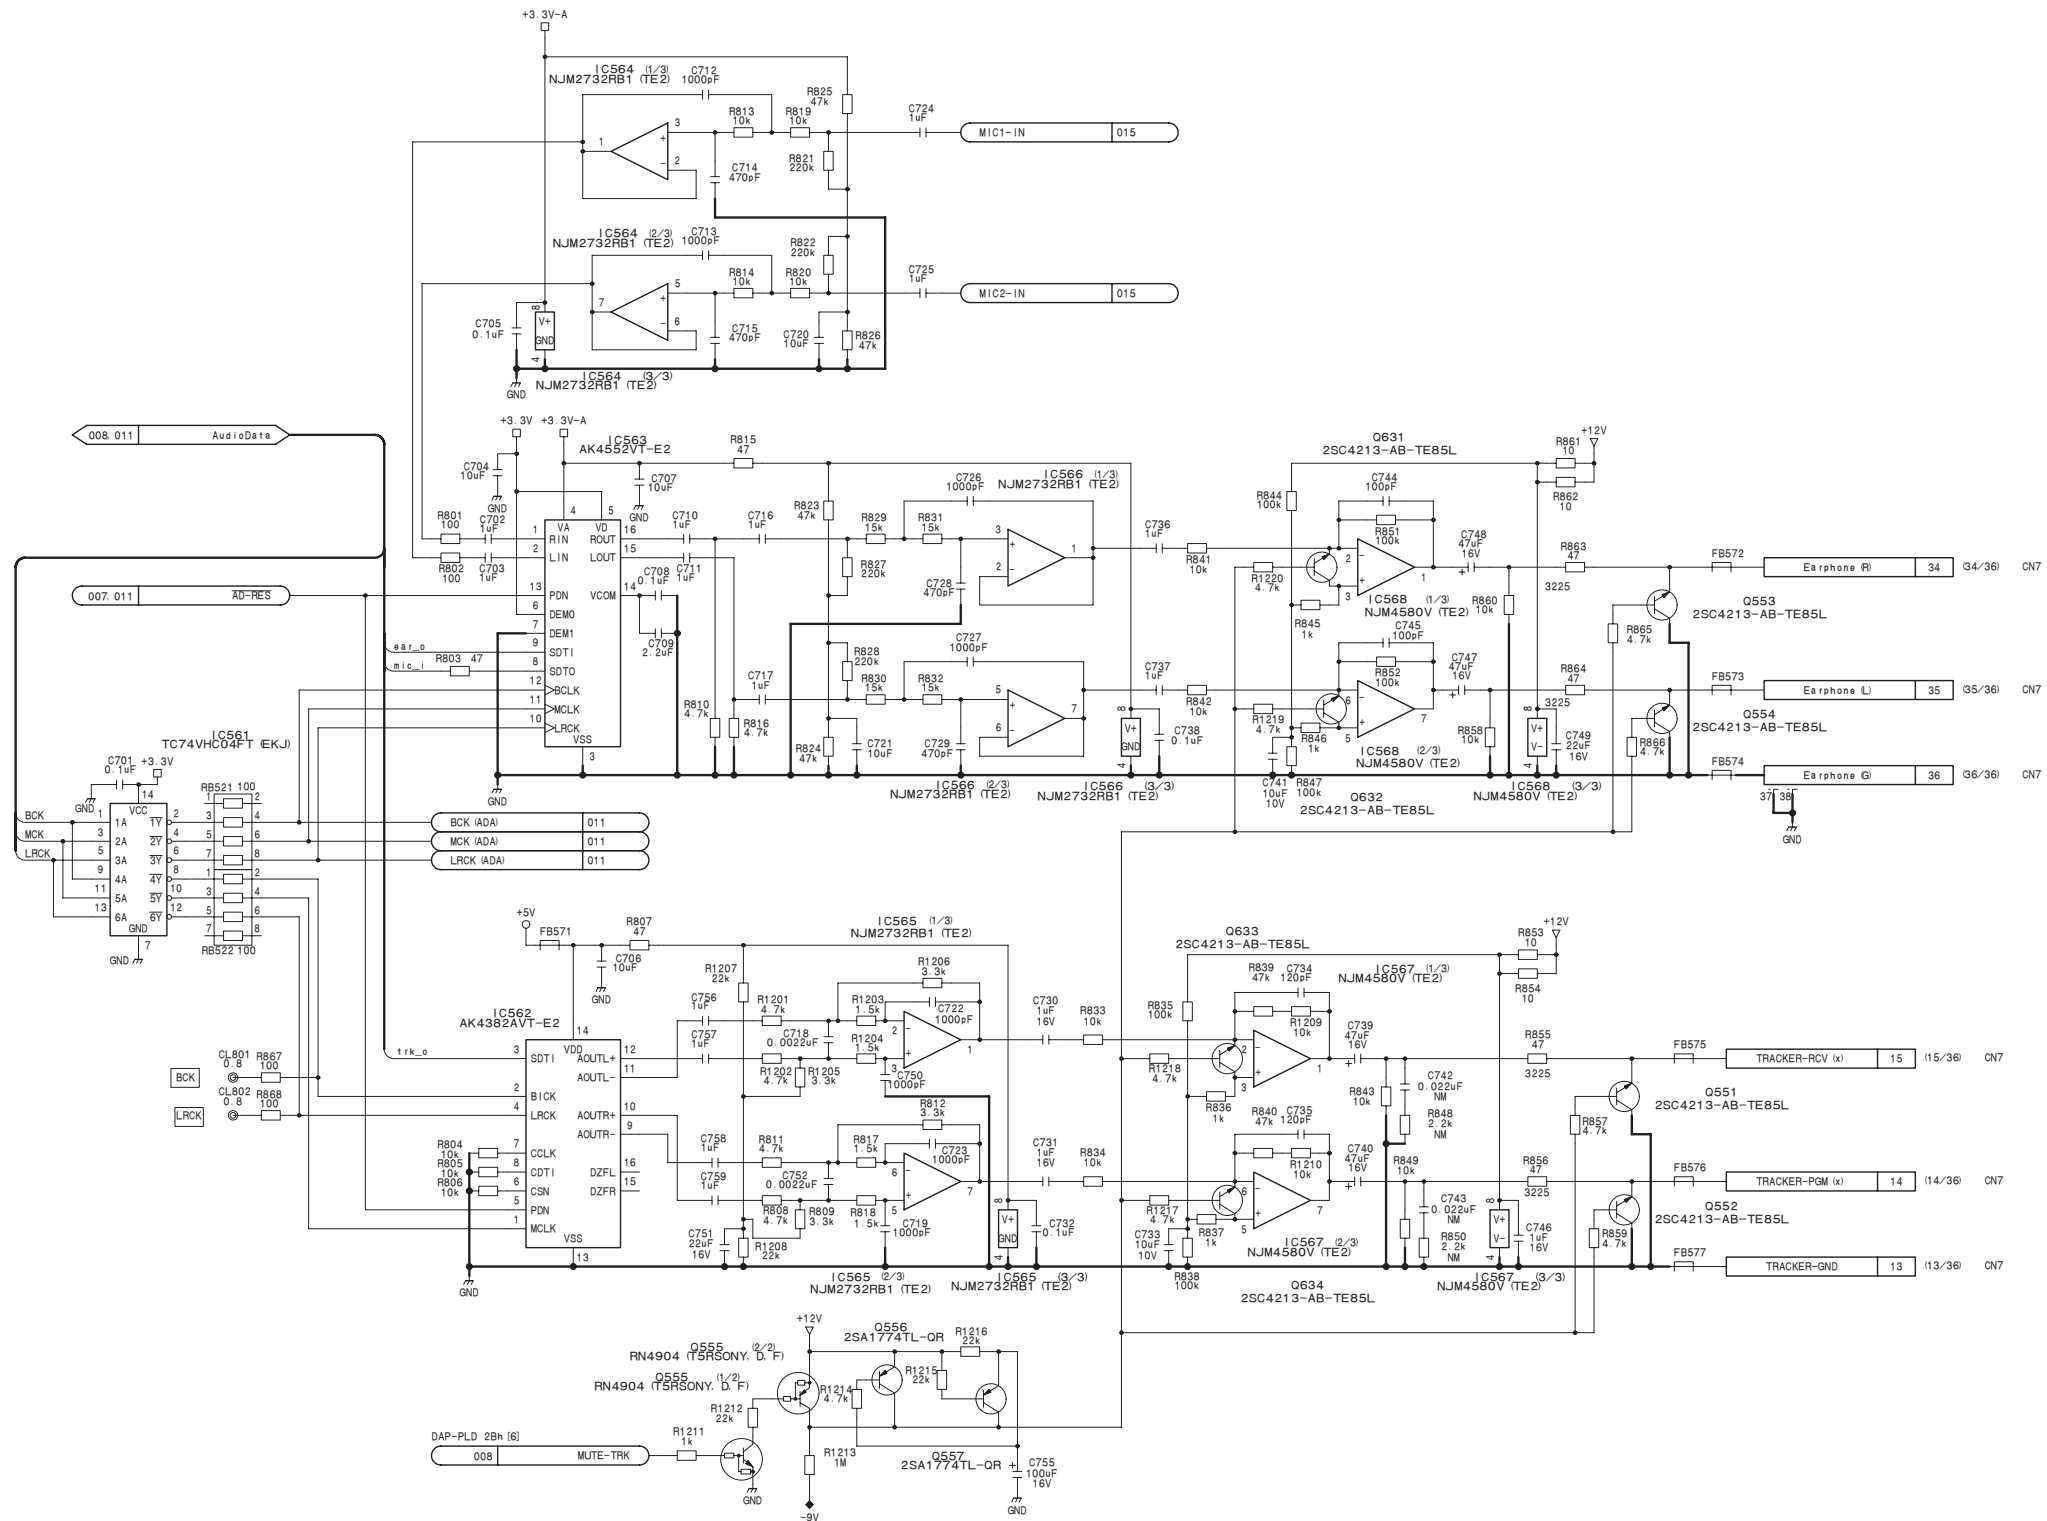


SY-363 (12/15)

BOARD NO. 1-879-606-11
HSC-300_SY-363_011_12


1

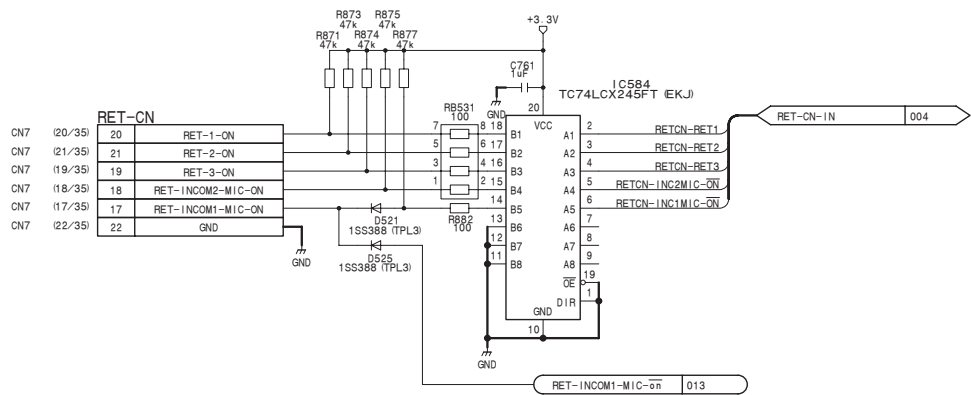




2

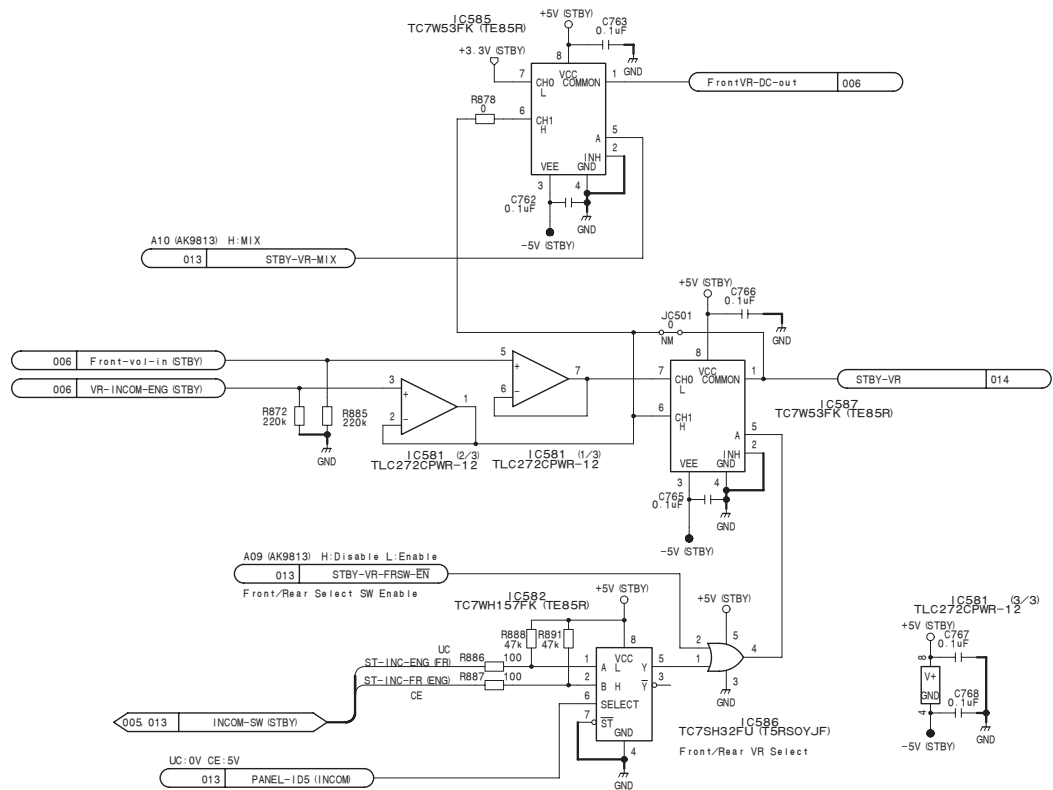



4

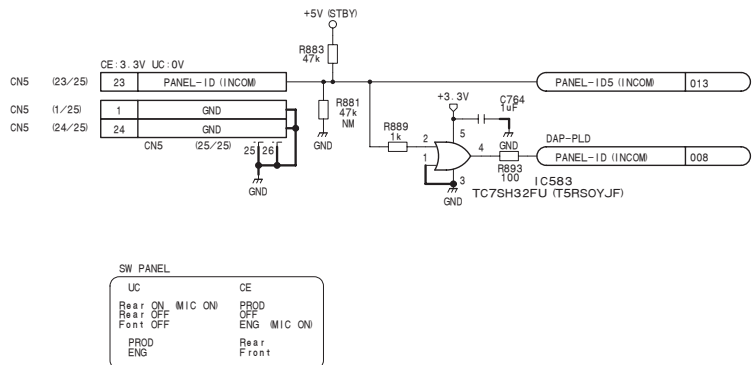

5

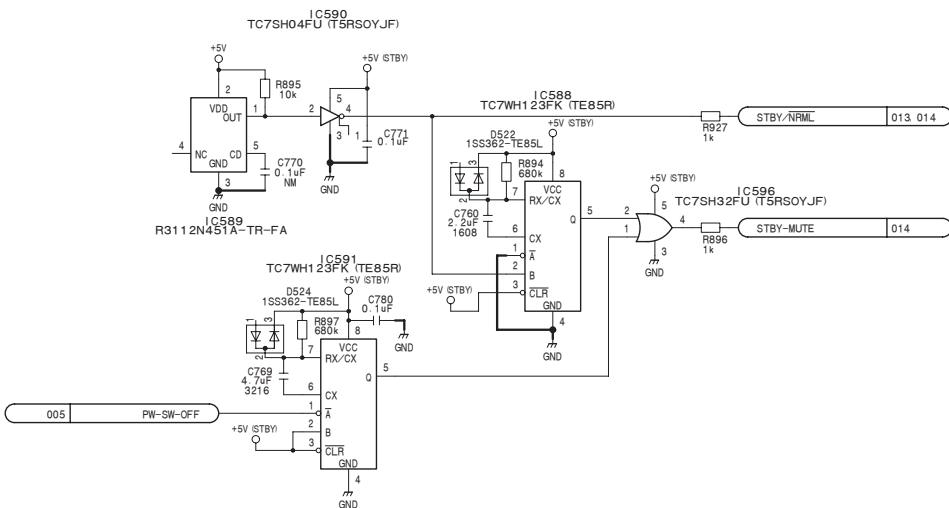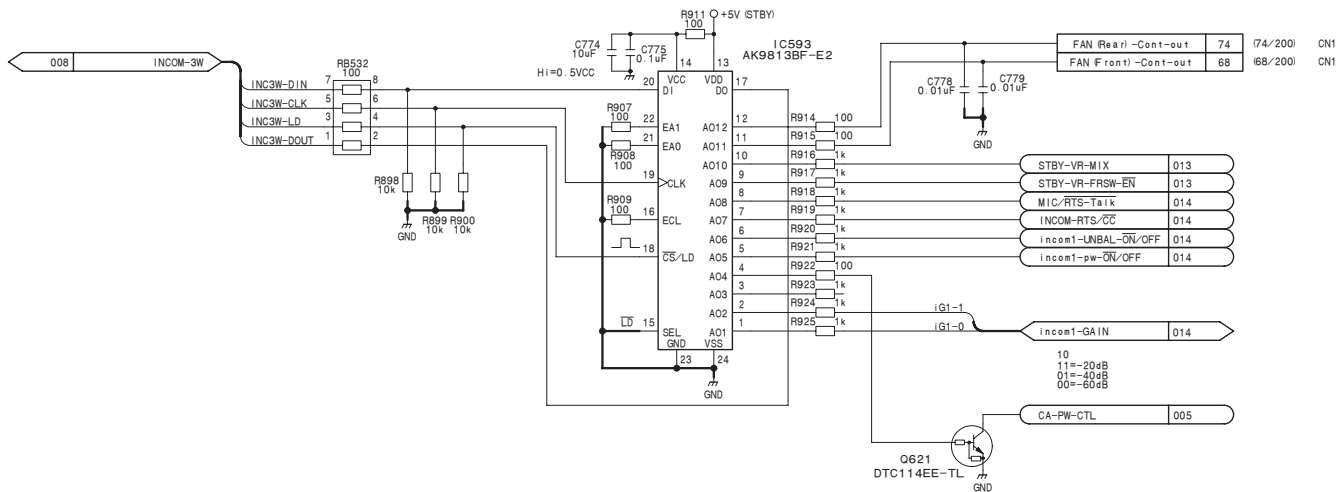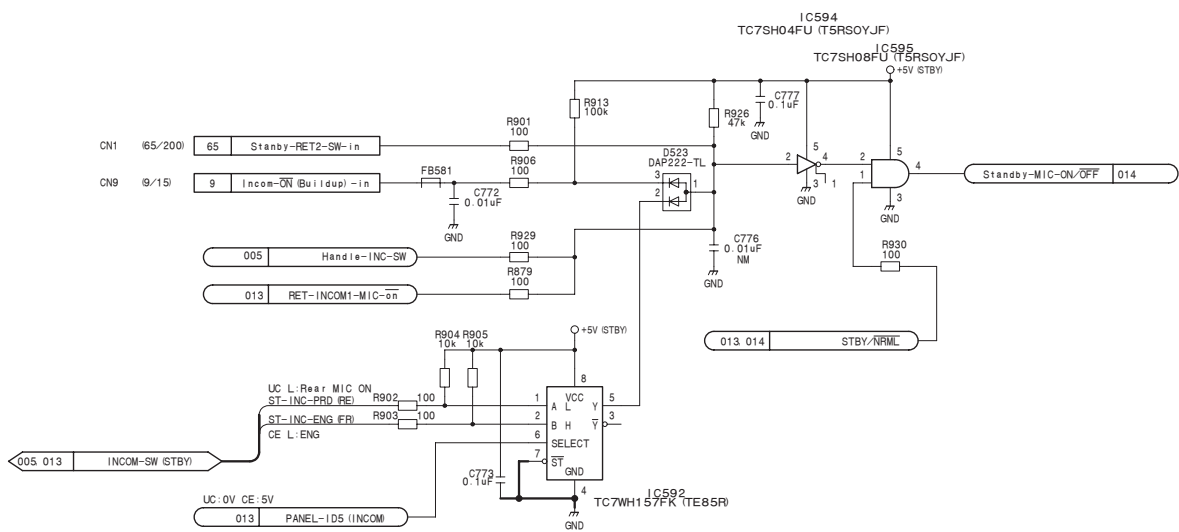






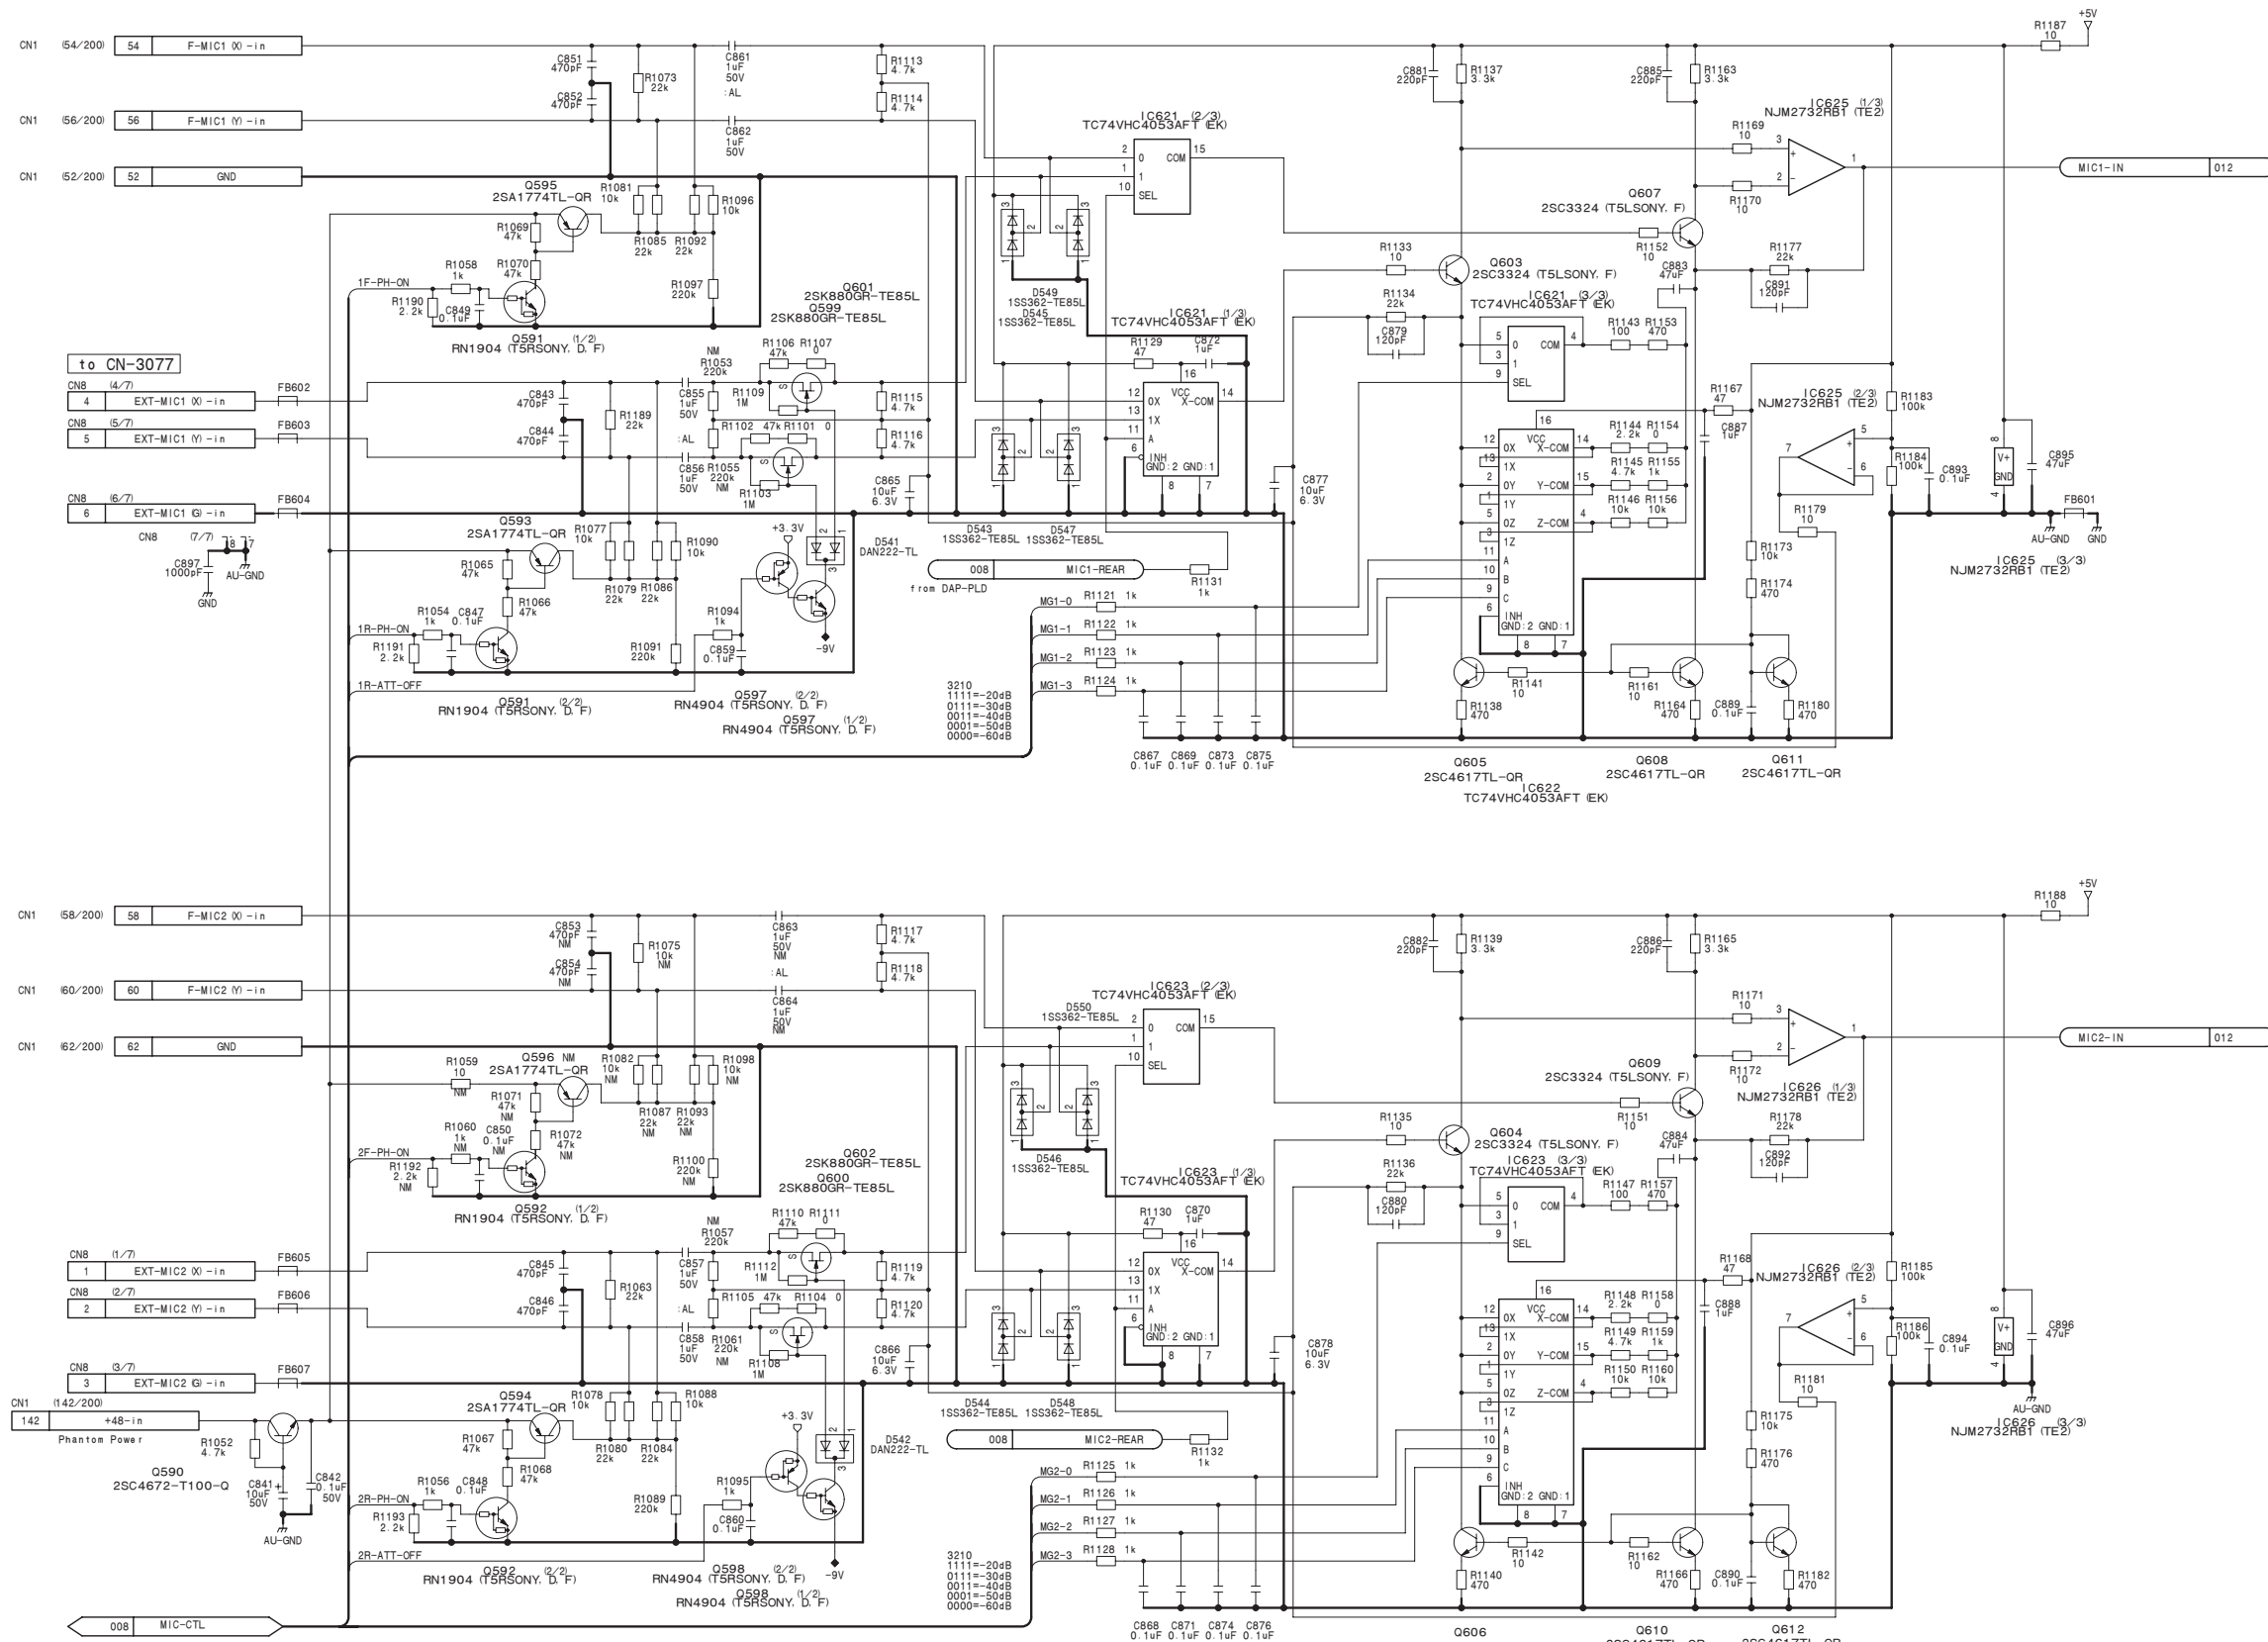



SY-363 (15/15)

BOARD NO. 1-879-606-11
HSC-300_SY-363_011_15



2

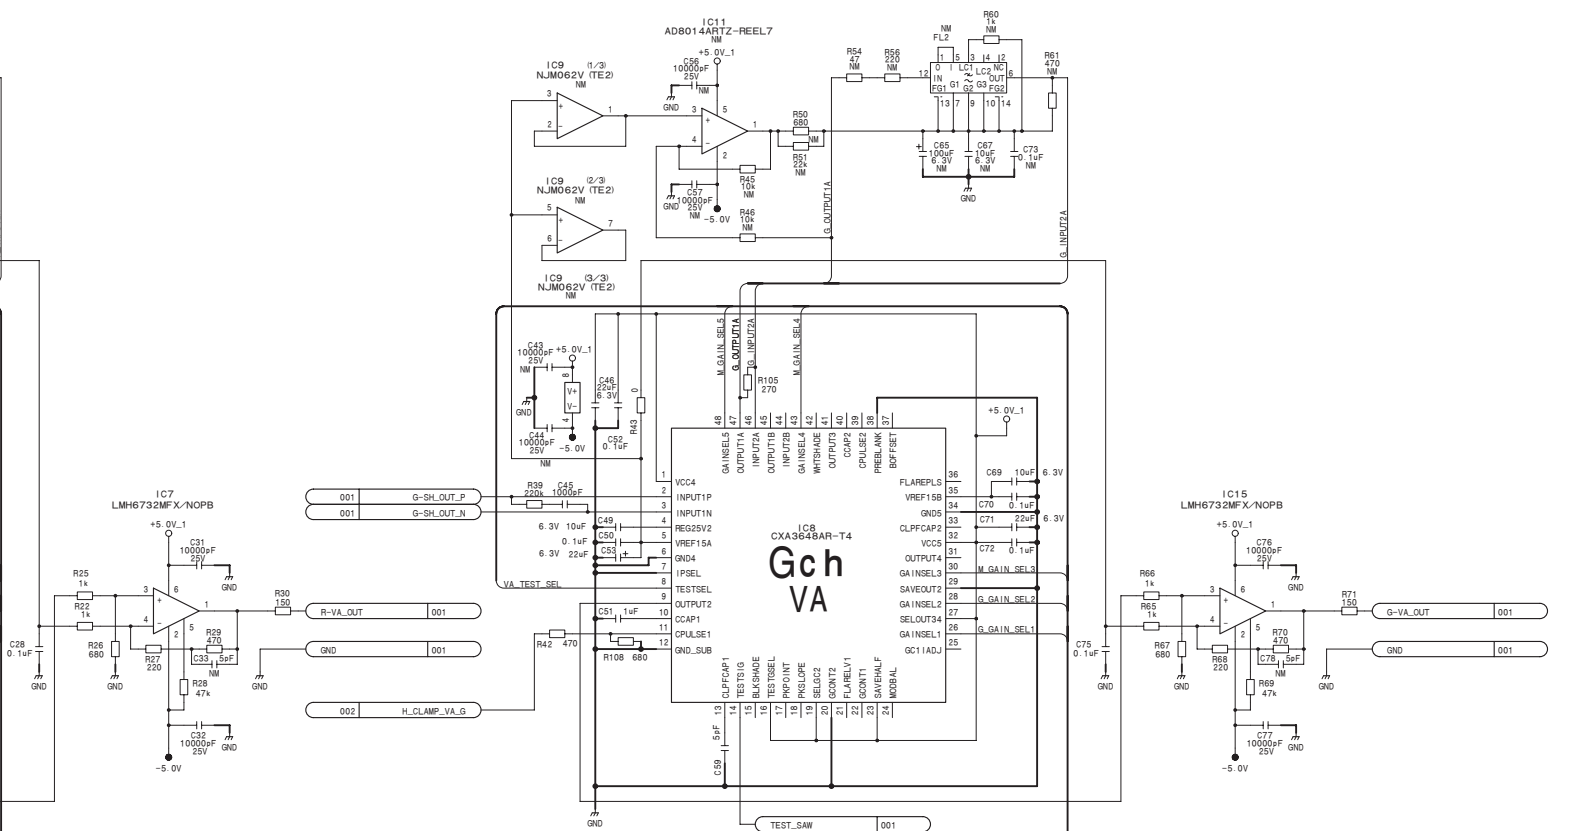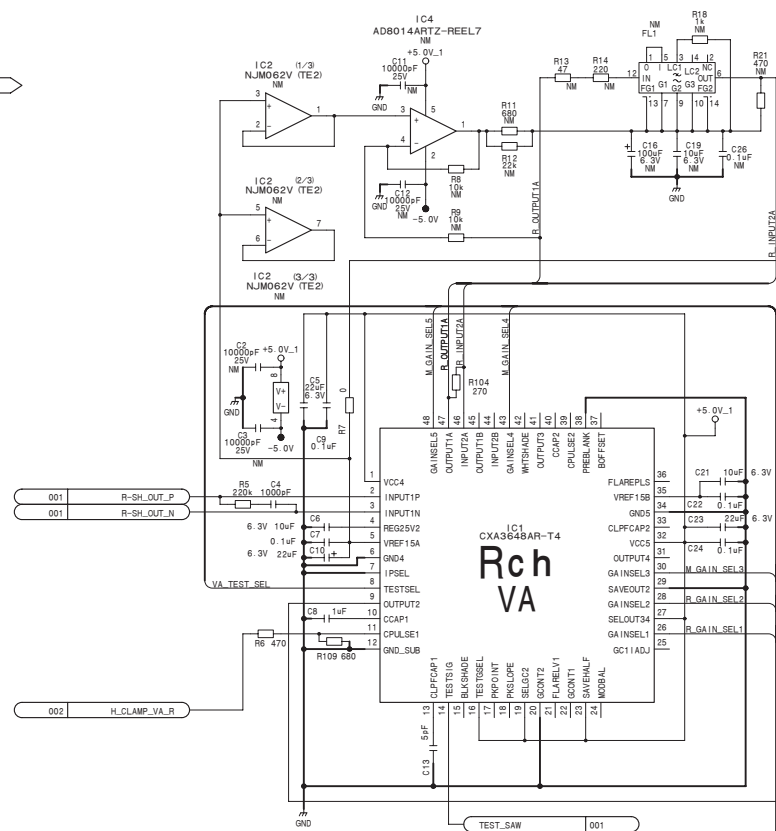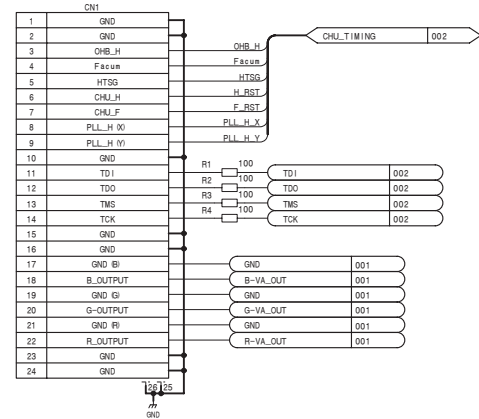


3

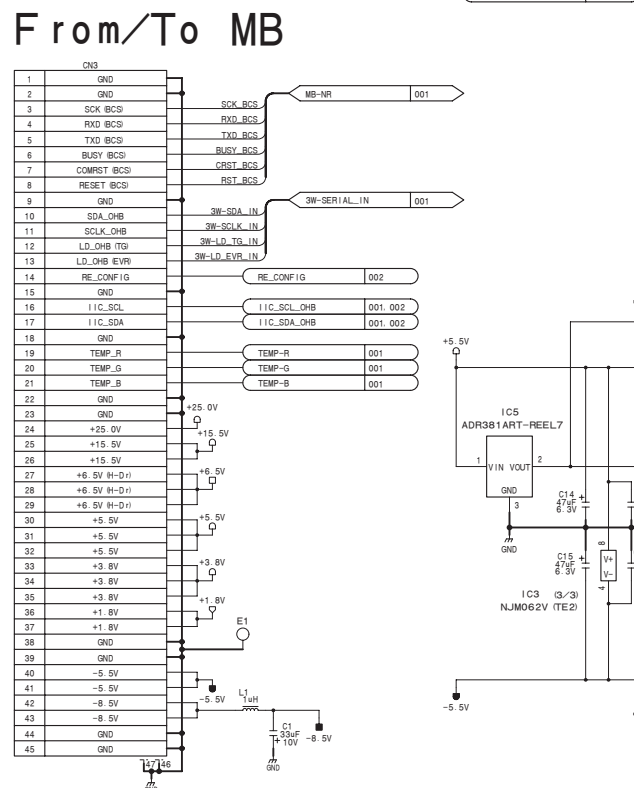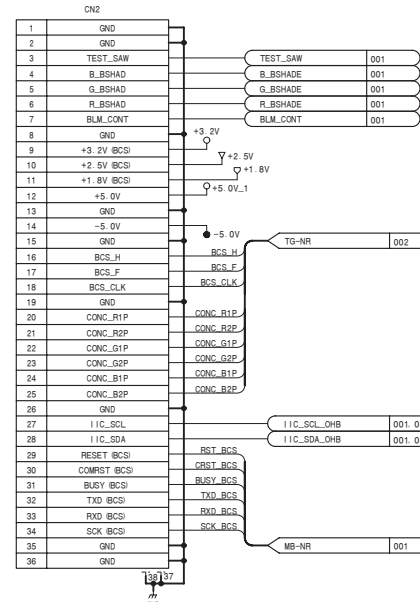


4

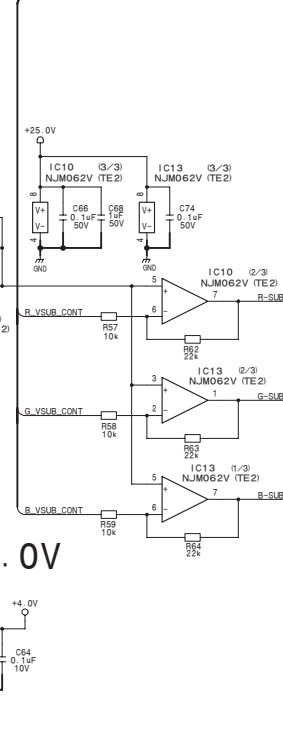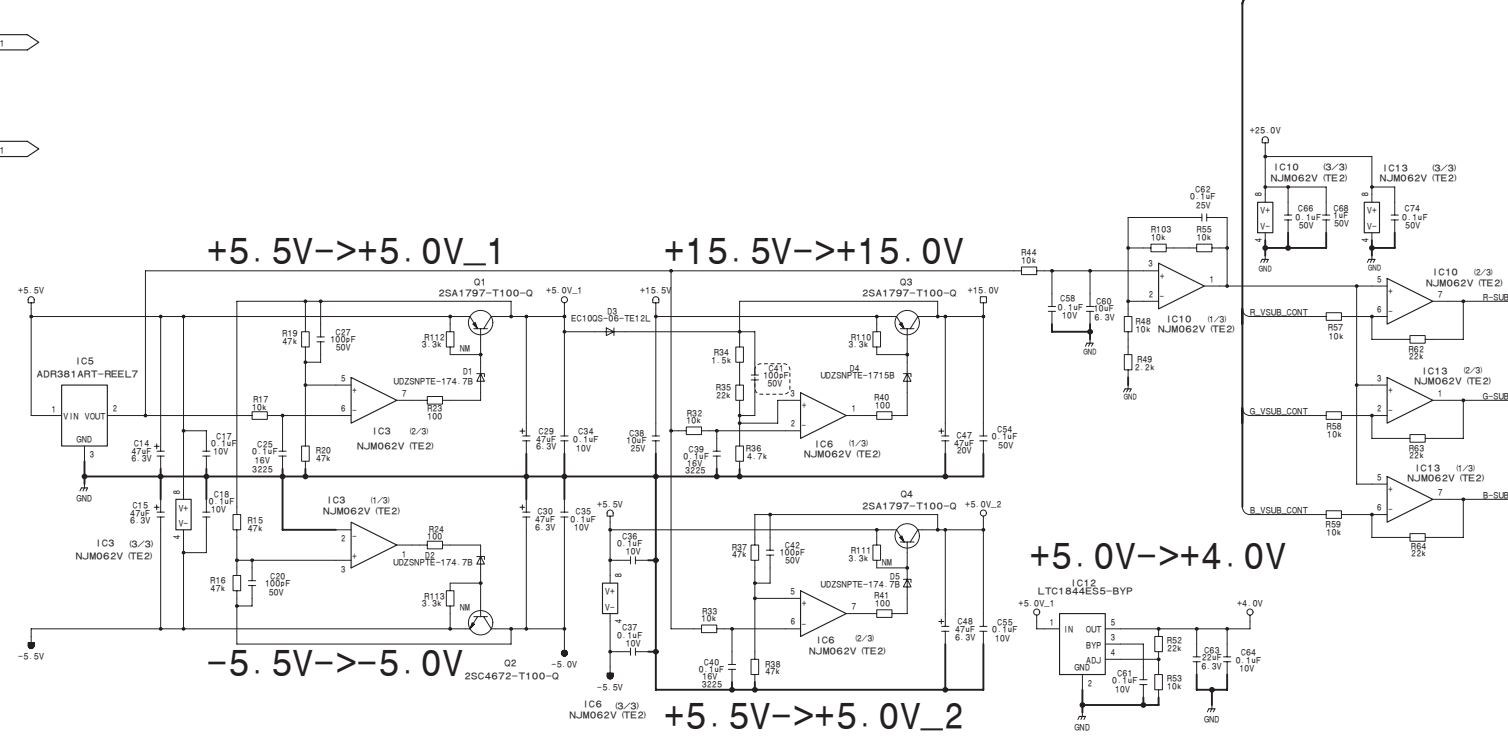

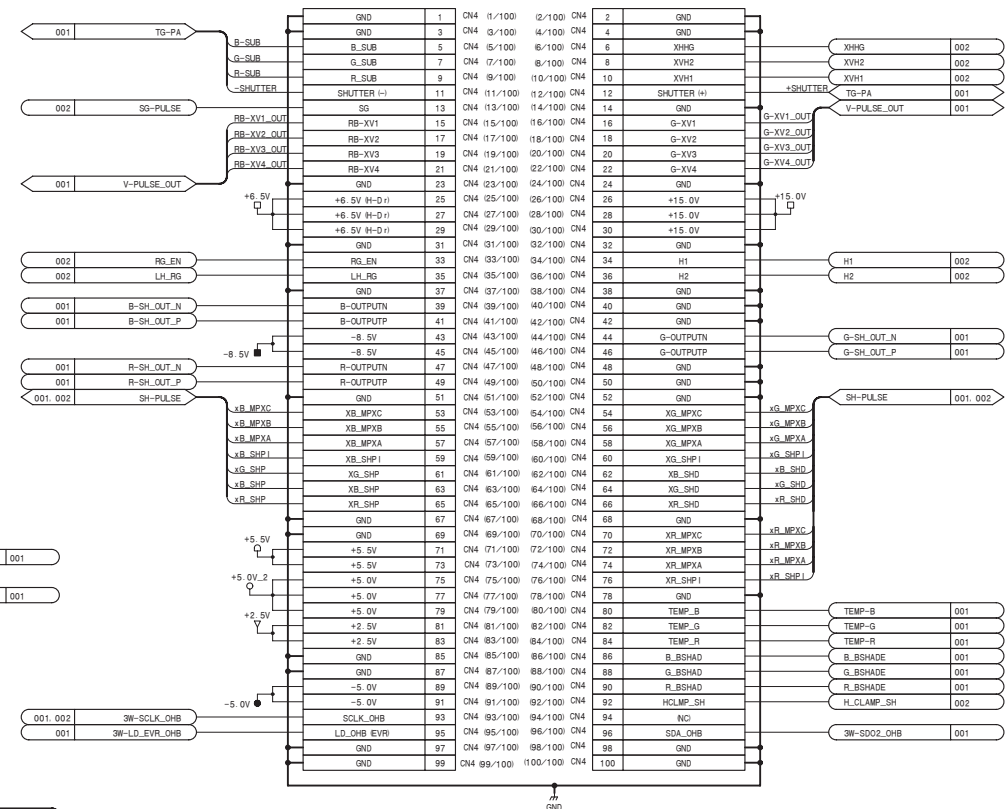


From/To DR

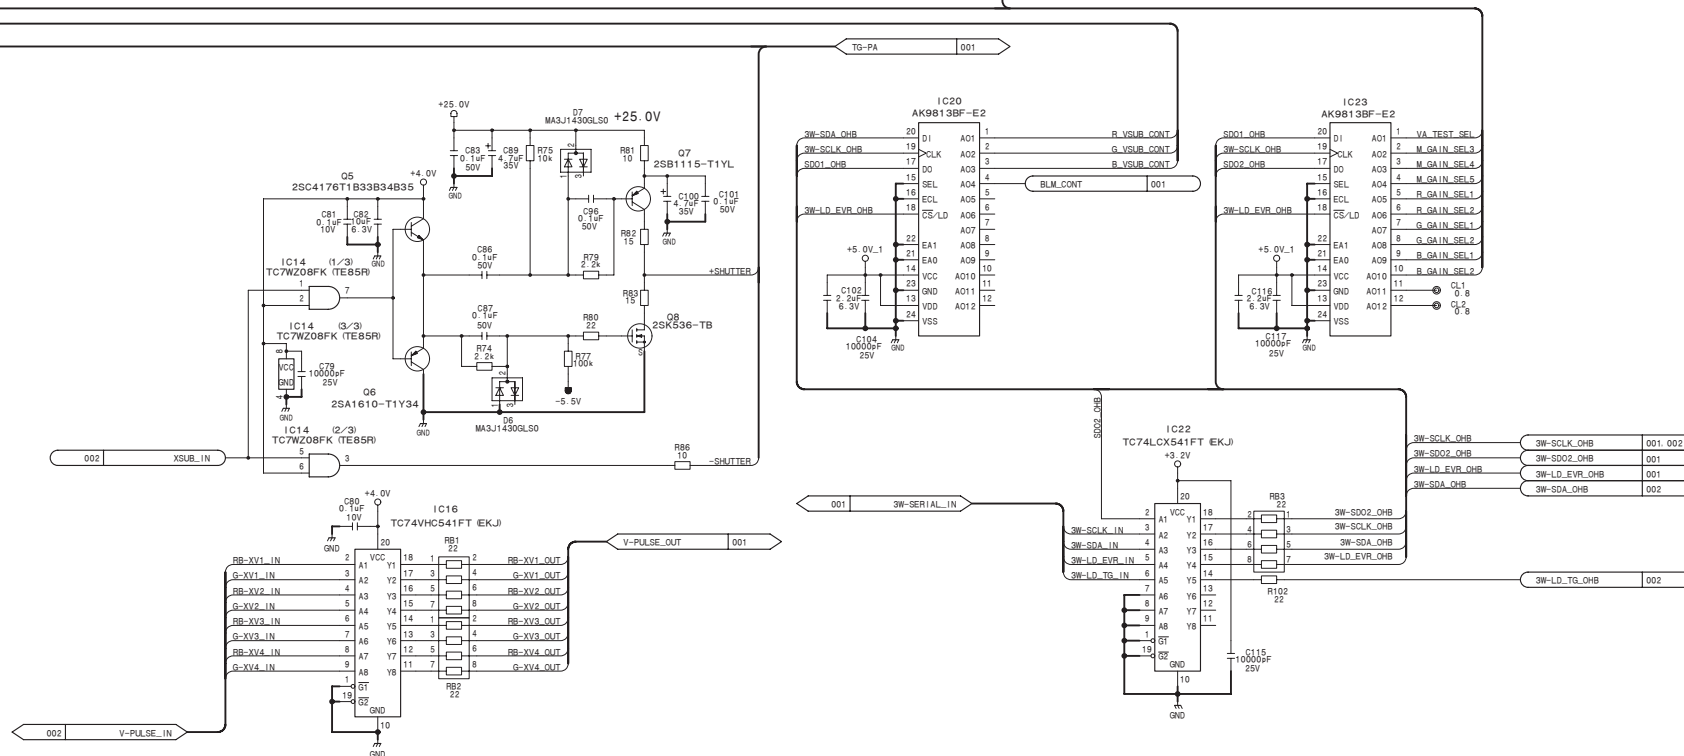



TG-265 (1/2)
BOARD NO. 1-879-594-11
HSC-300_TG-265_011_1


2

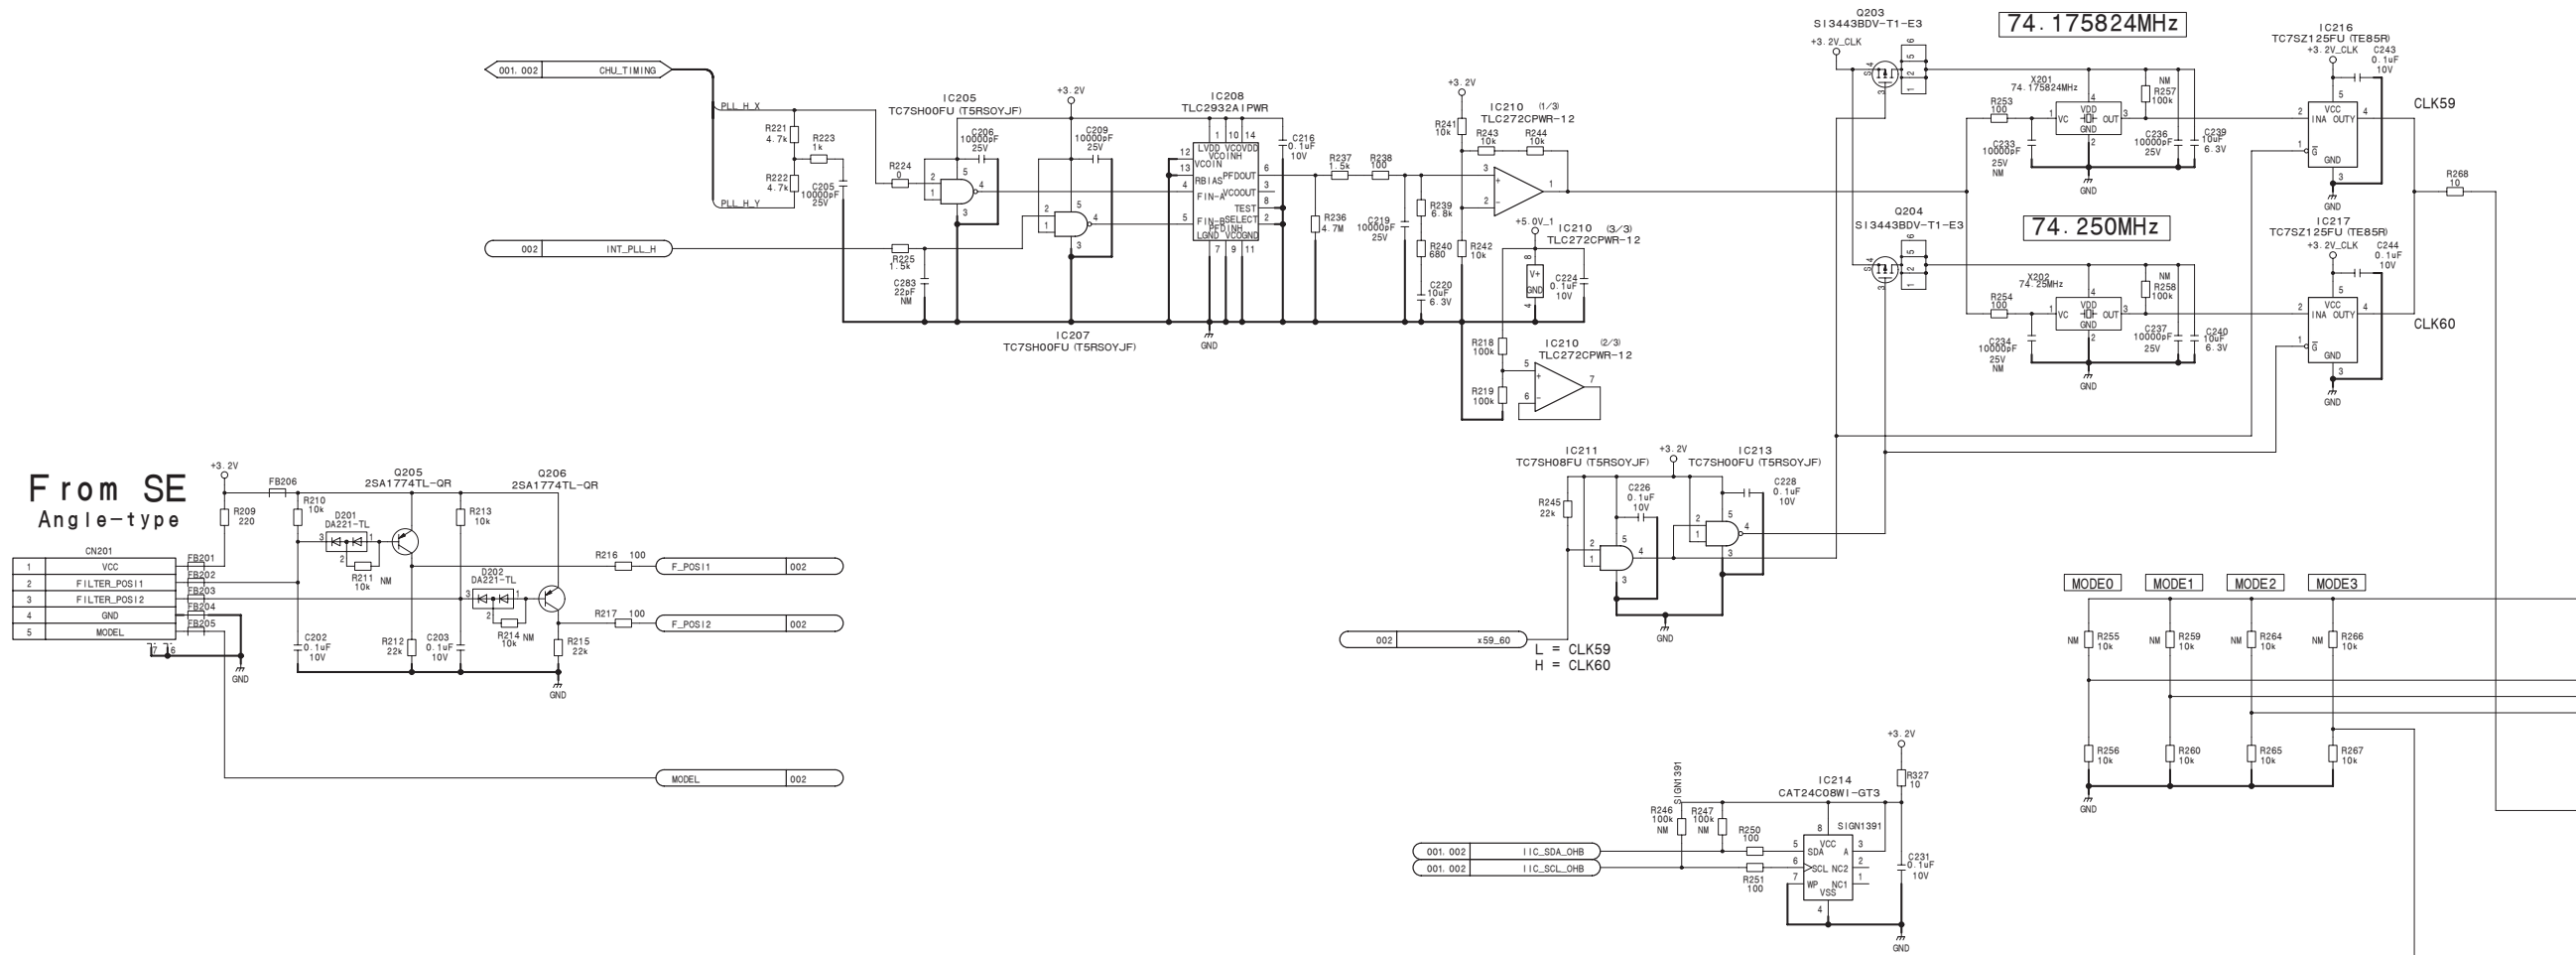




4






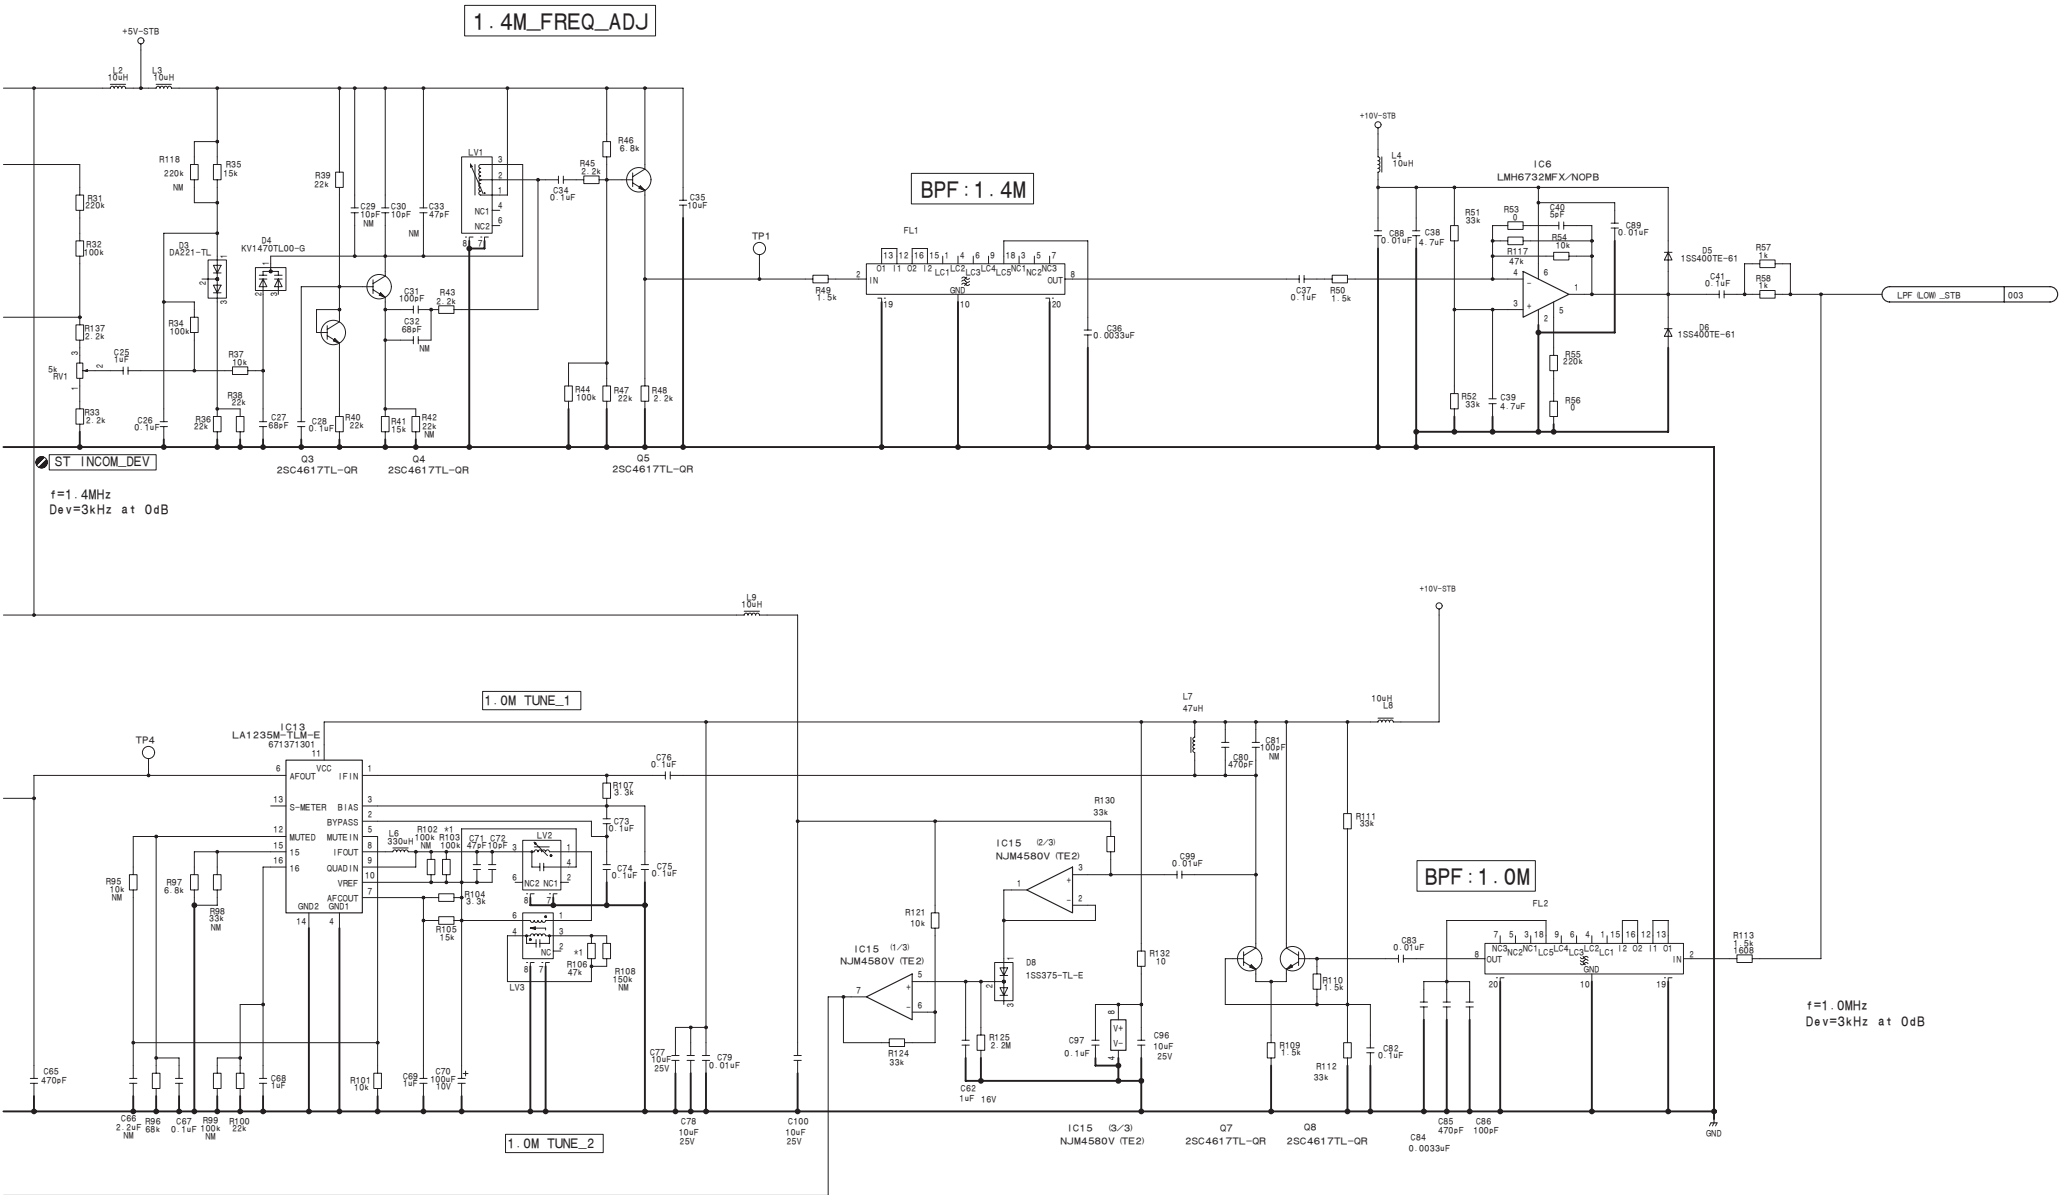

TX-126 (1/4)
BOARD NO. 1-879-604-11
HSC-300_TX-126_011_1

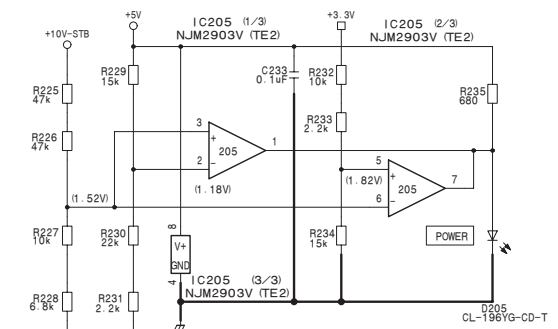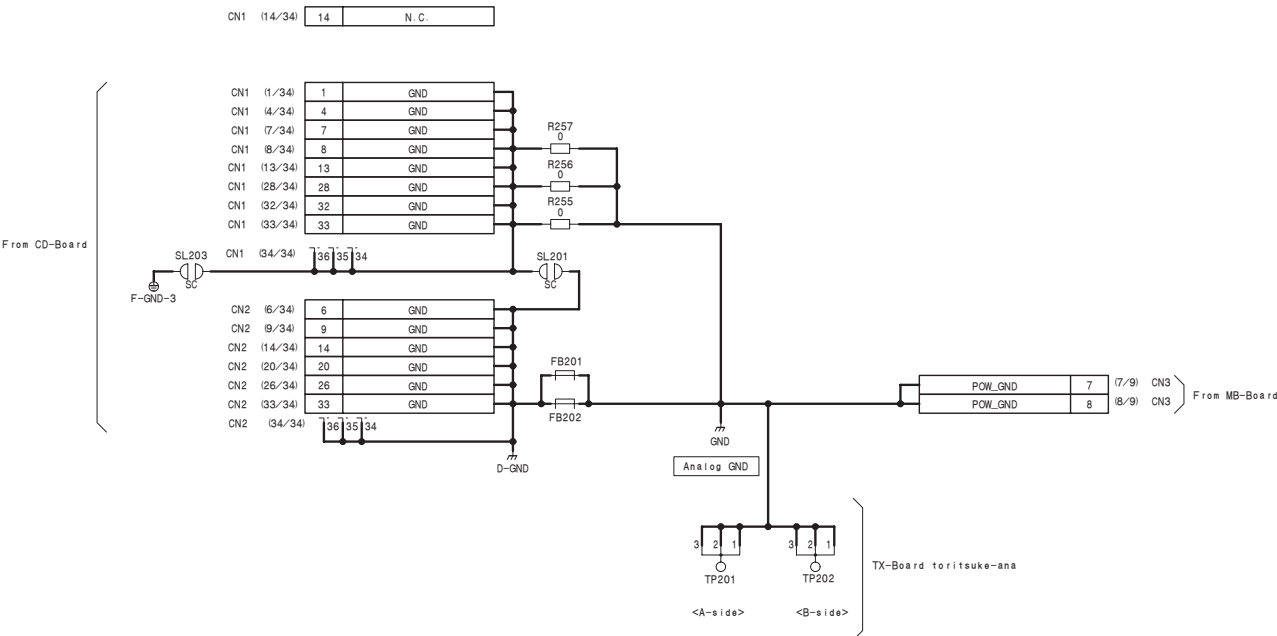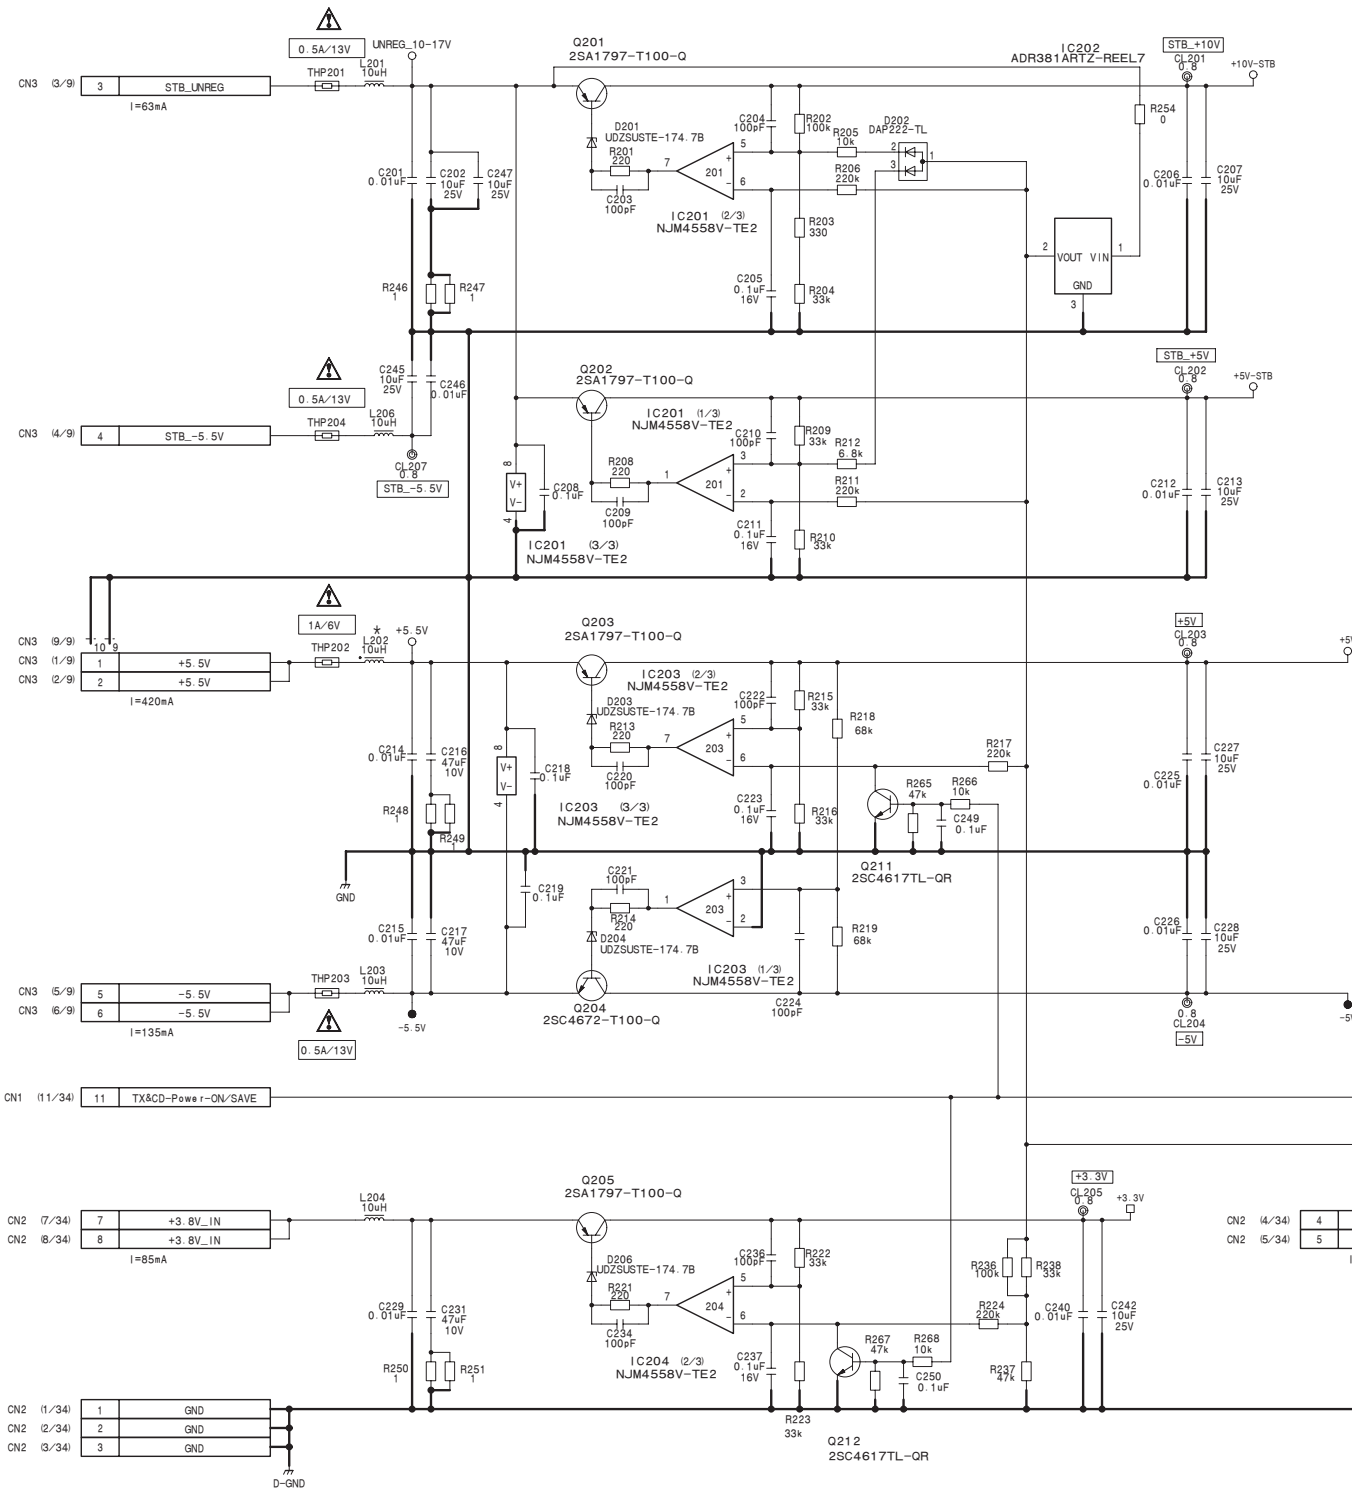

3-80

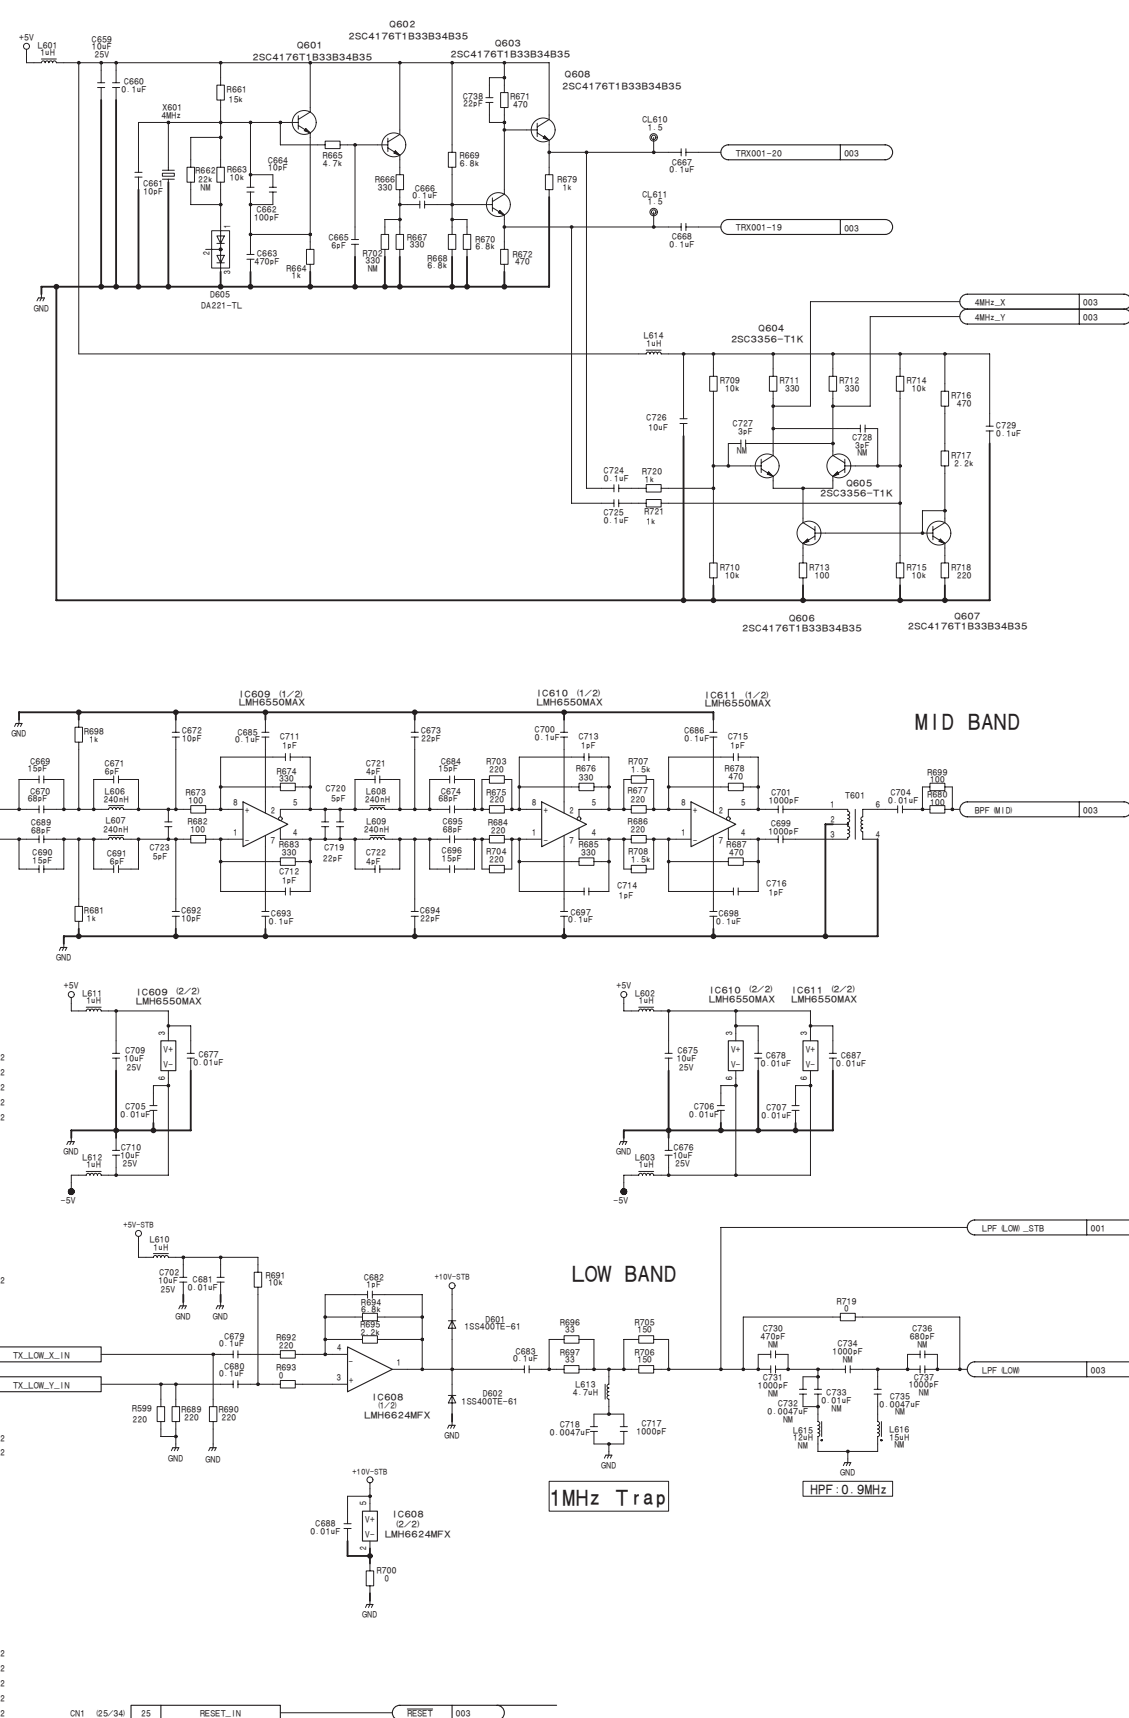




1


2

3

4

5

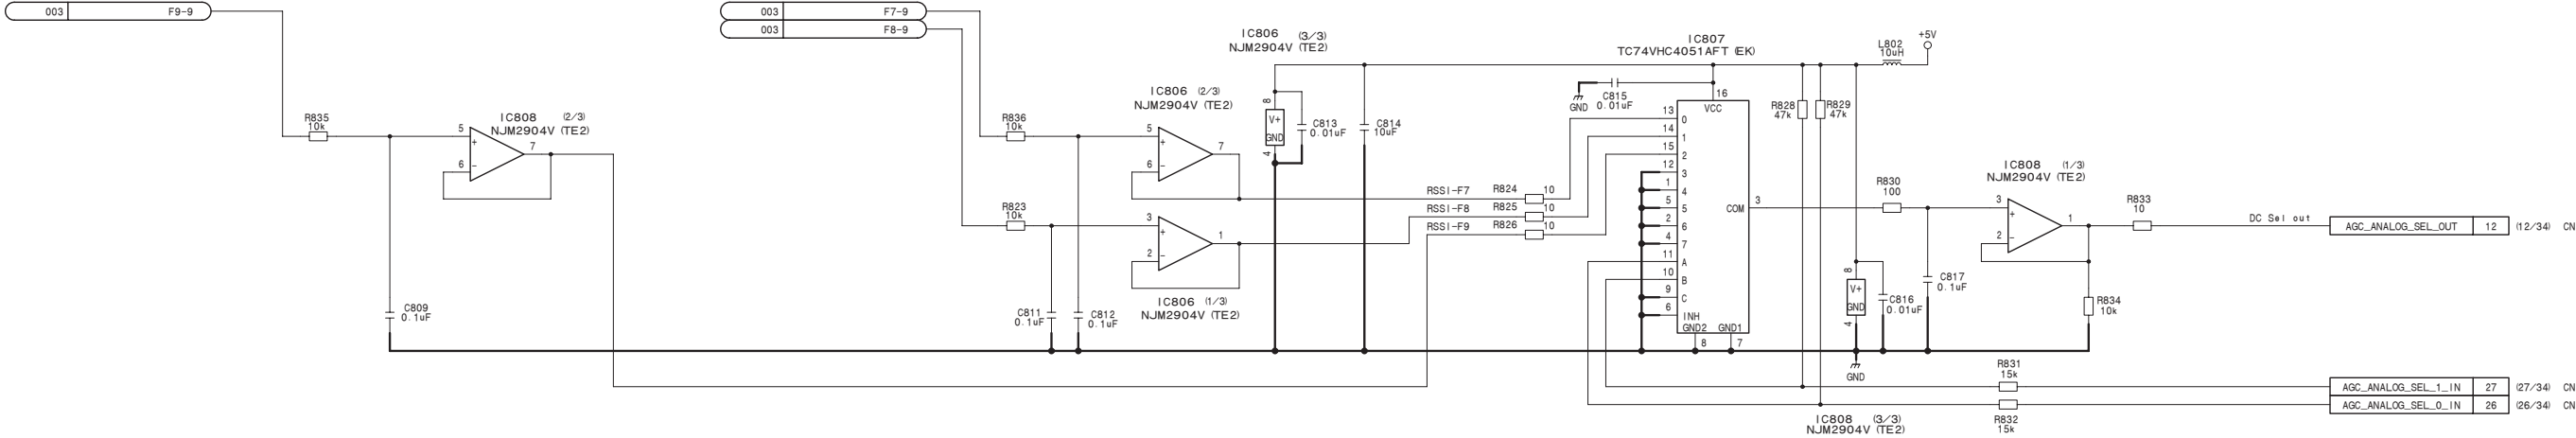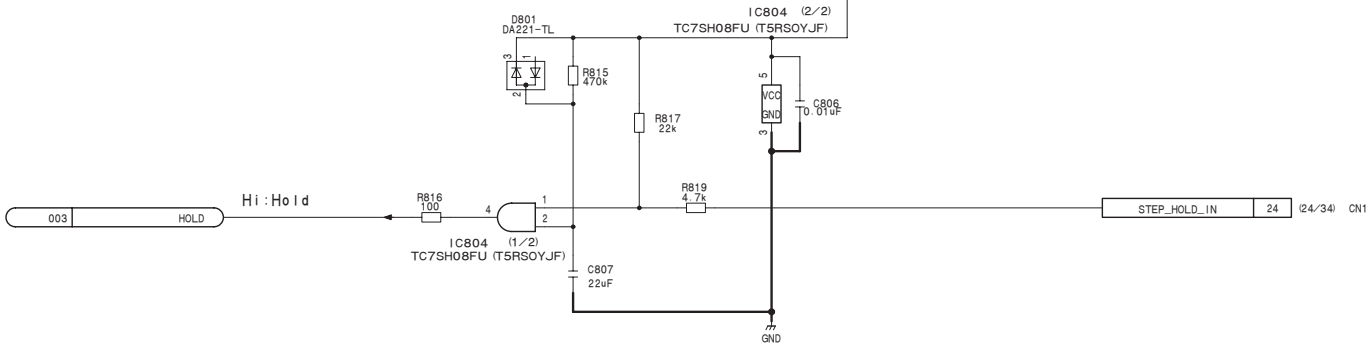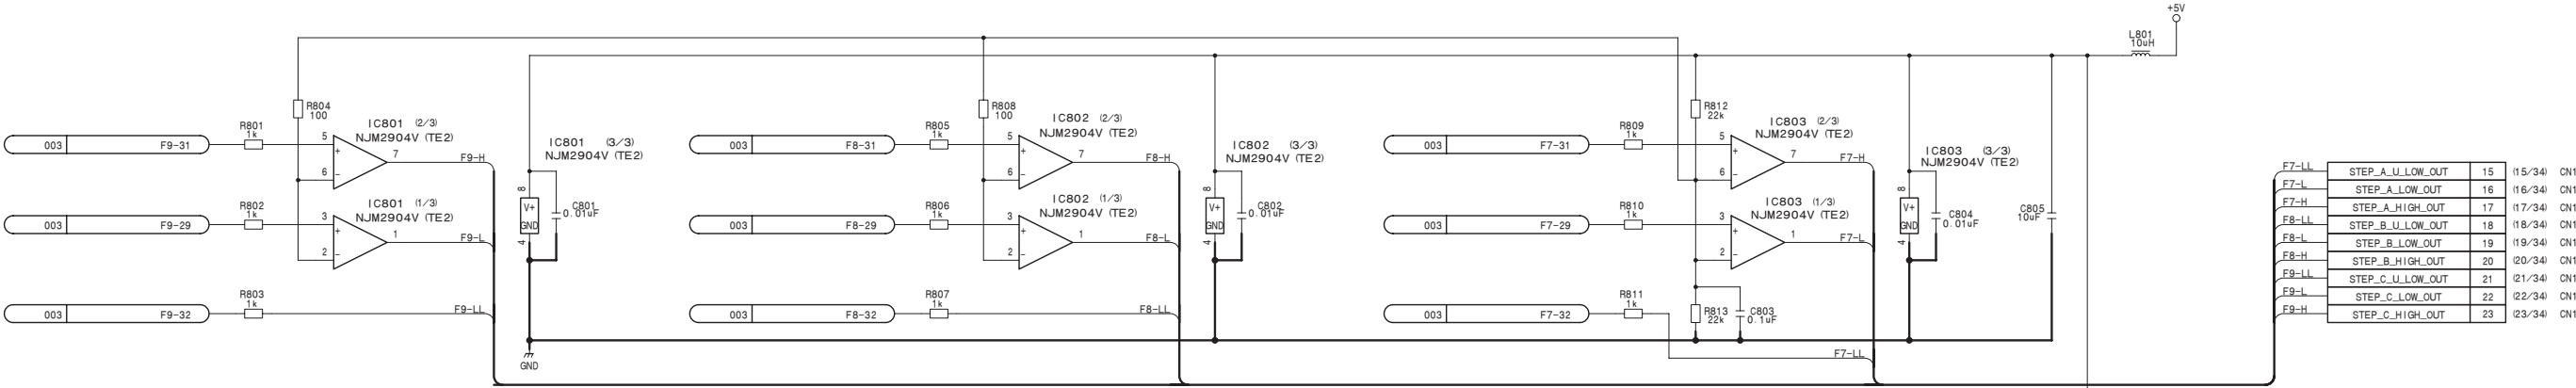

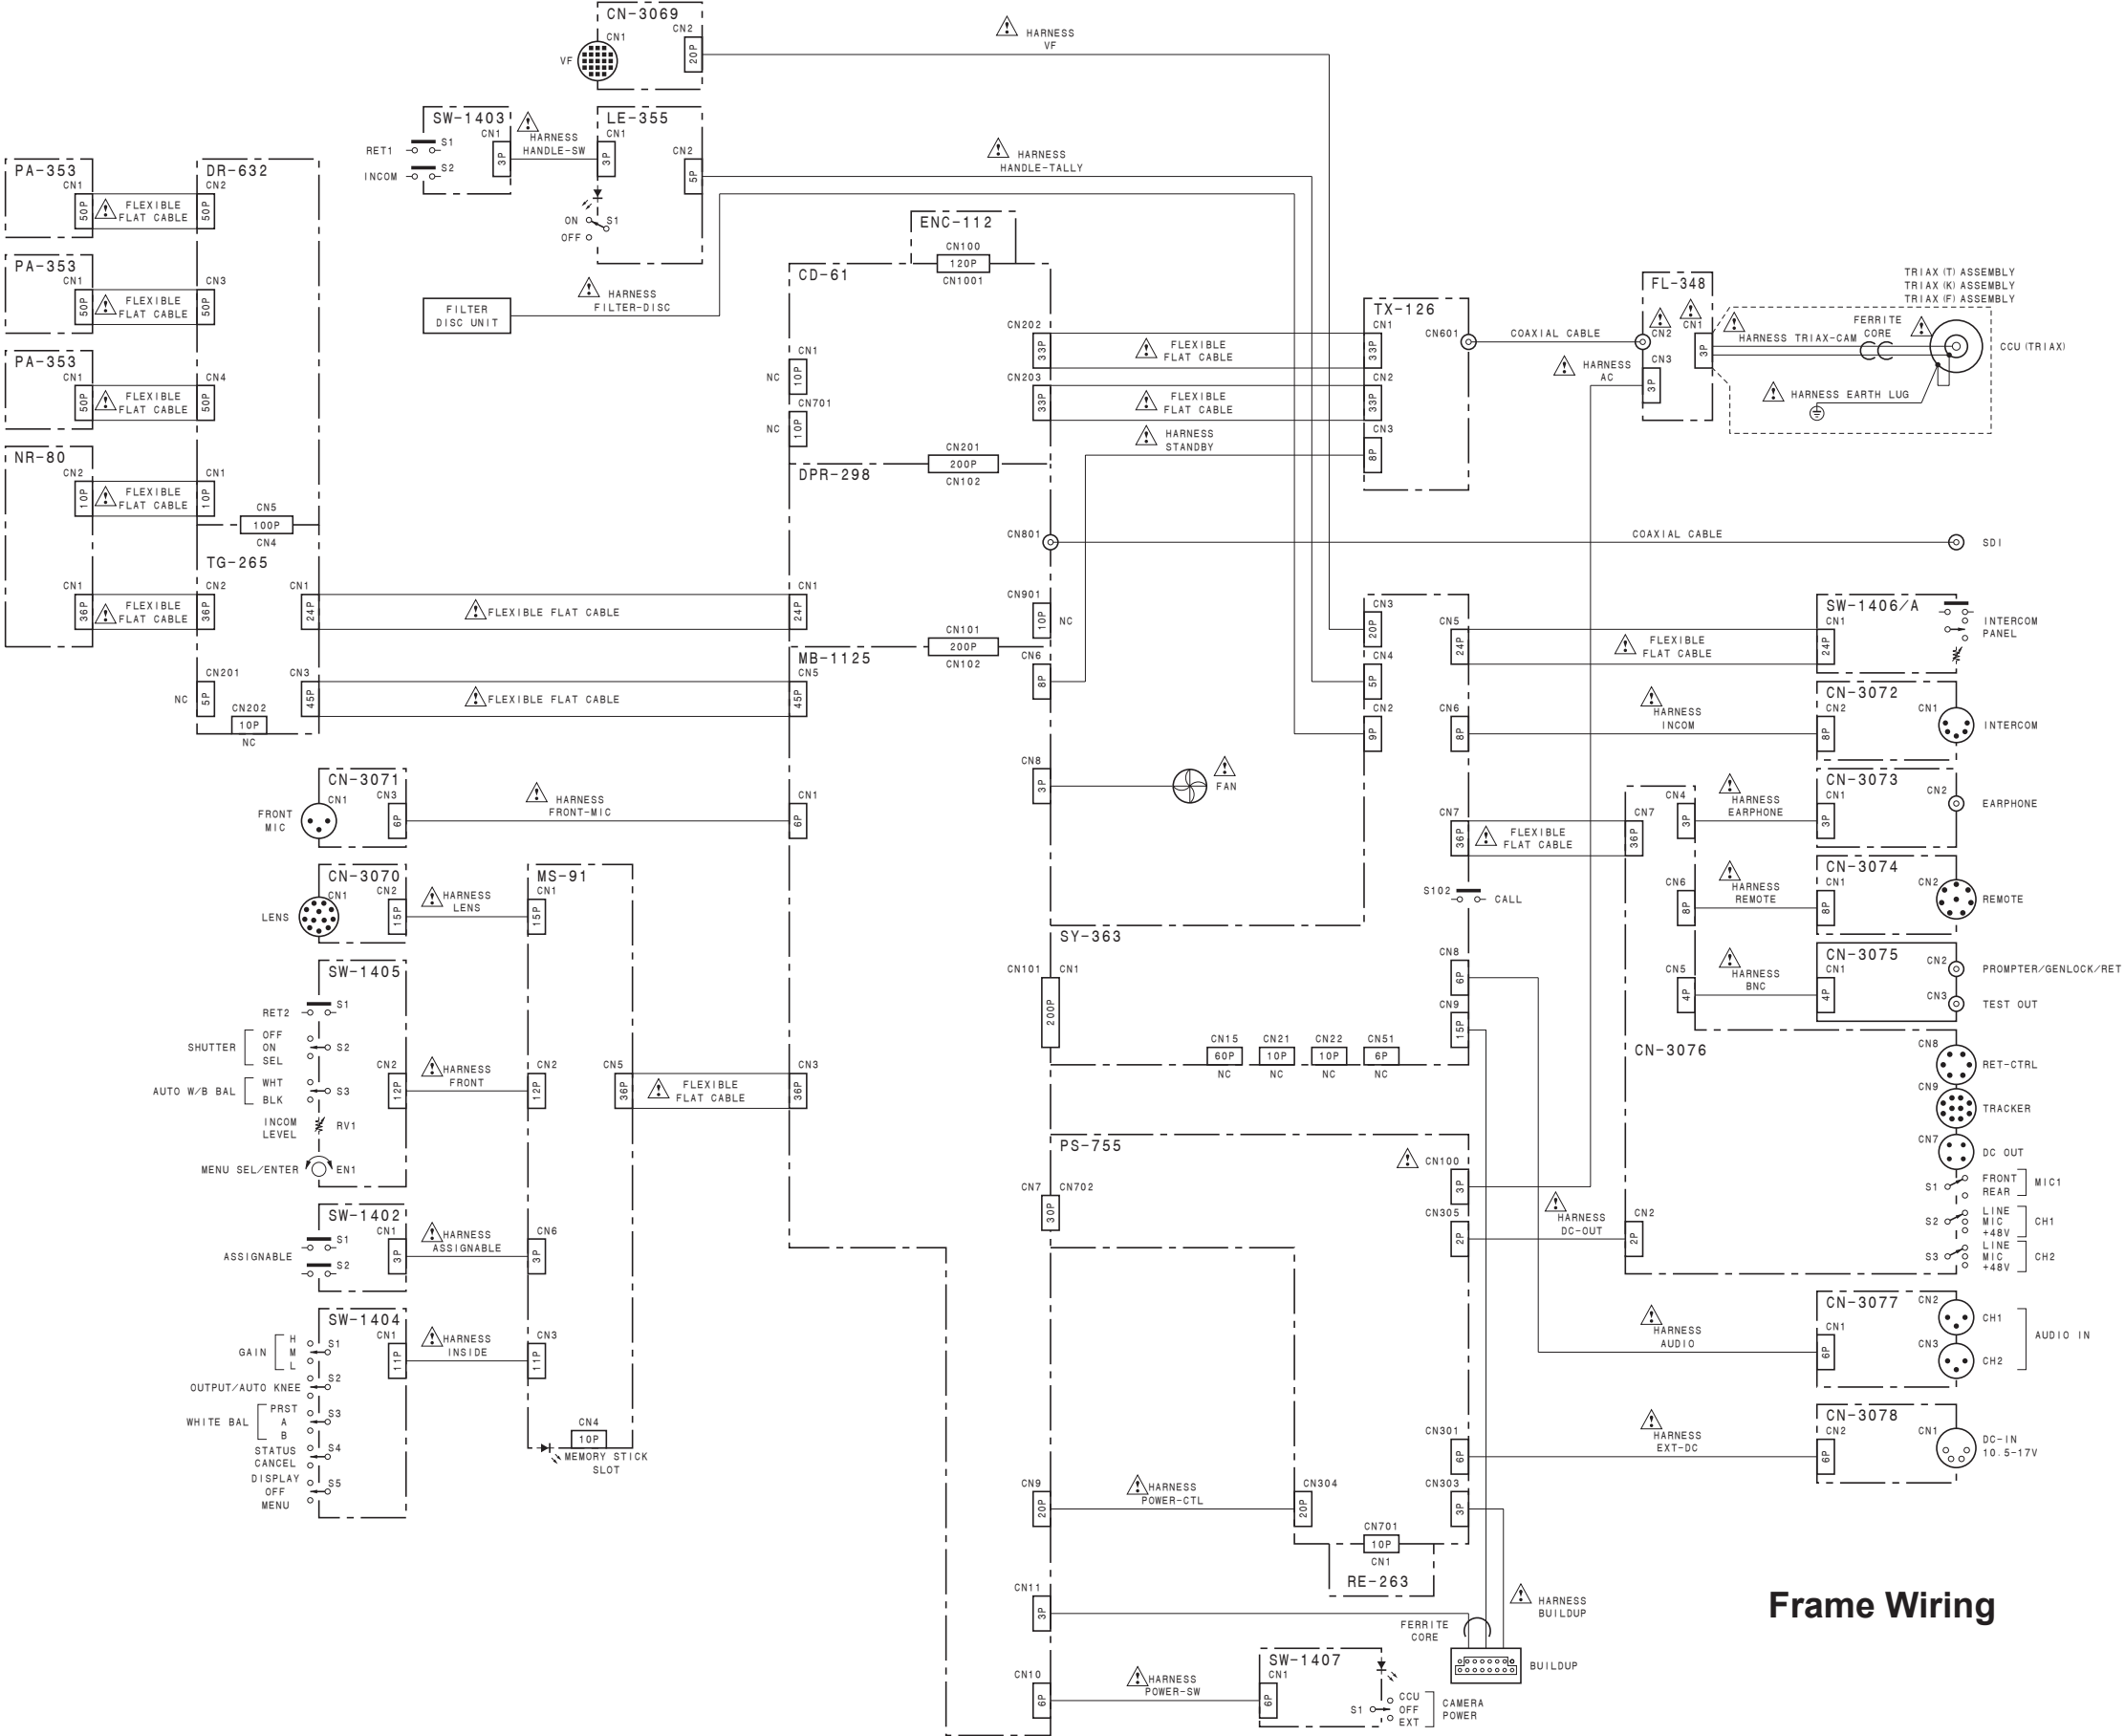


Section 4
Board Layouts


Index

Board name		Page
C.	CD-61	4-2
	CN-3069	4-4
	CN-3070	4-4
	CN-3071	4-4
	CN-3072	4-4
	CN-3073	4-4
	CN-3074	4-4
	CN-3075	4-5
	CN-3076	4-5
	CN-3077	4-5
	CN-3078	4-5
D.	DPR-298	4-6
	DR-632	4-9
E.	ENC-112	4-9
F.	FL-348	4-10
L.	LE-355	4-10
M.	MB-1125	4-11
	MS-91	4-12
N.	NR-80	4-12
P.	PA-353	4-12
	PS-755	*
R.	RE-263	*
S.	SW-1402	4-13
	SW-1403	4-13
	SW-1404	4-13
	SW-1405	4-13
	SW-1406/A	4-13
	SW-1407	4-13
	SY-363	4-14
T.	TG-265	4-18
	TX-126	4-19

※: The board layout of this board is not described in this manual.

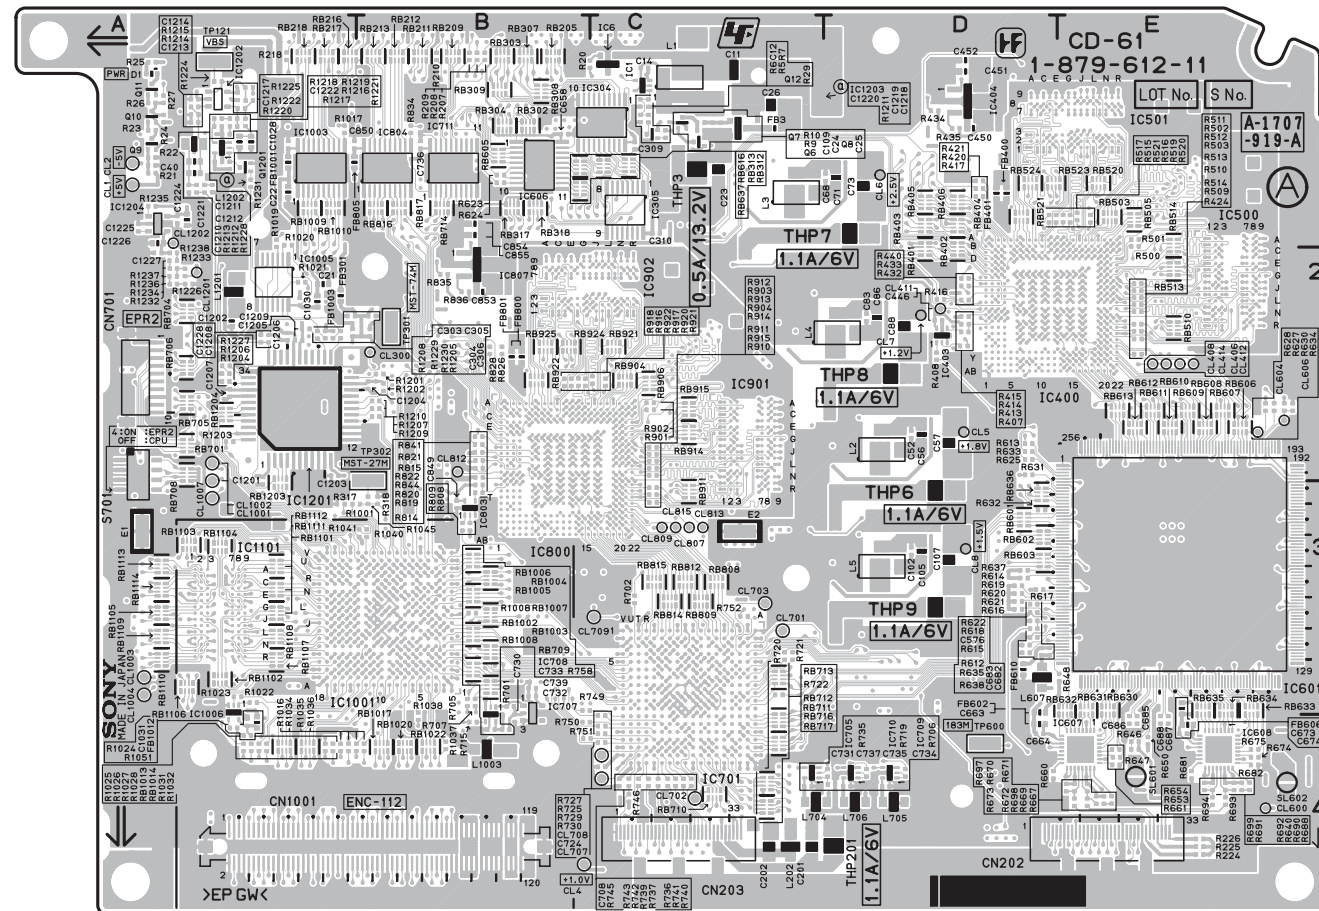

CD-61 -A SIDE-SUFFIX: -11

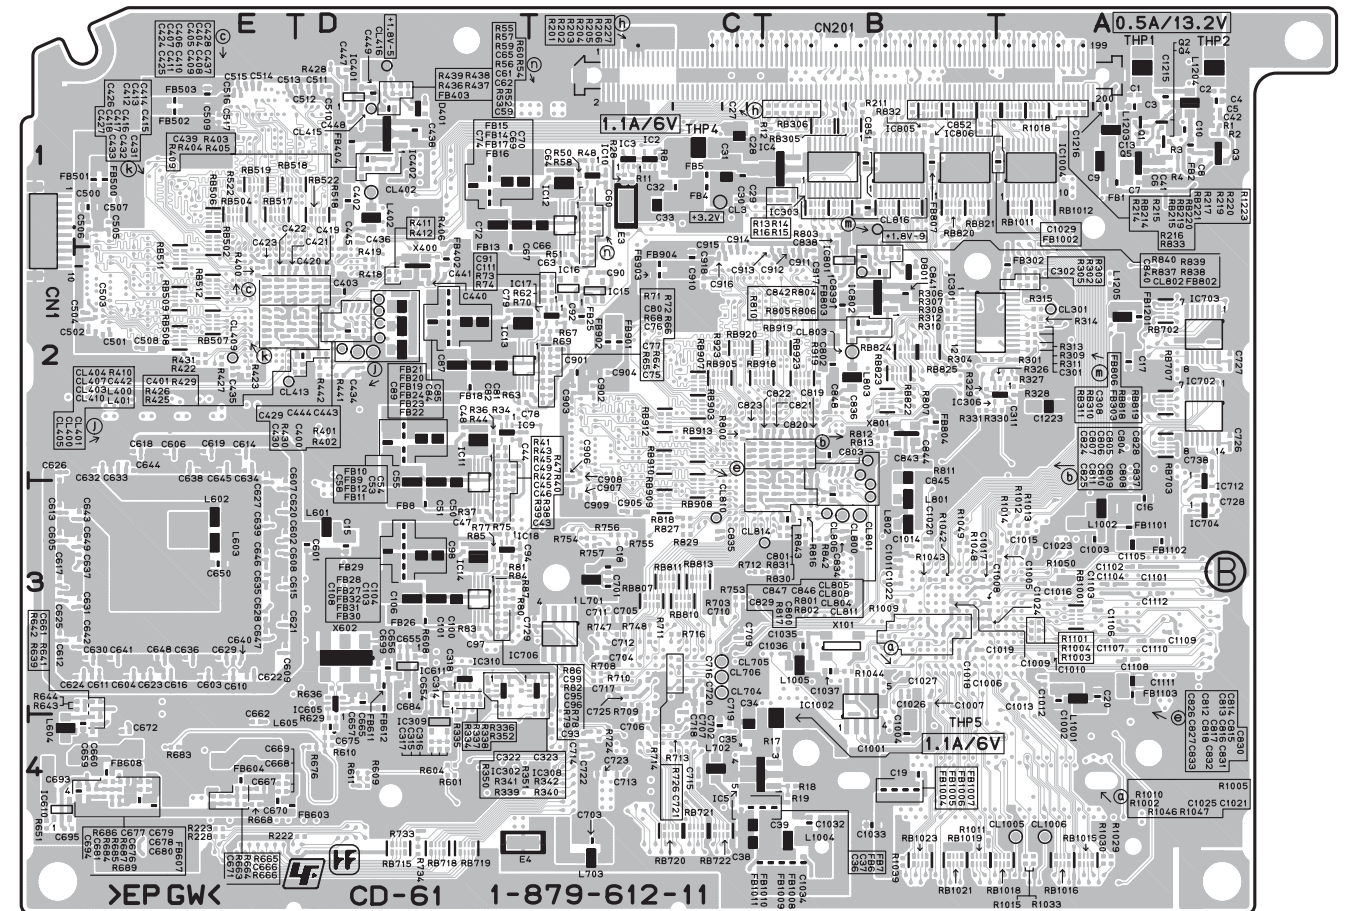



CD-61 -B SIDE-
SUFFIX: -11

CD-61 (1-879-612-11)


*:B SIDE

C1	*A1	C92	*C2	C500	*E1	C676	*E4	C835	*C3	C1204	B2	CN1	*E1	FB1011	*C4	L603	*E3	R62	*C2	R406	*D2	R643	*E3	R800	*C2	R1034	A4	RB502	*E1	RB911	C3
C2	*A1	C93	*D3	C501	*E2	C677	*E4	C836	*B2	C1205	A2	CN1001	B4	FB1012	A4	L604	*E4	R63	*D2	R407	D2	R644	*E3	R801	*B3	R1035	A4	RB503	E1	RB912	*C2
C3	*A1	C94	*D3	C502	*E2	C678	*E4	C837	*B2	C1206	A2	CN201	*B1	FB1101	*A3	L605	*D4	R64	*C2	R408	D2	R646	E4	R802	*B3	R1036	B4	RB504	*E1	RB913	*C2
C4	*A1	C95	*D3	C503	*E2	C679	*E4	C838	*B1	C1207	A2	CN202	E4	FB1102	*A3	L607	D3	R65	*C2	R409	*D1	R647	E4	R803	*B1	R1037	B4	RB505	E1	RB914	C2
C5	*A1	C96	*D3	C504	*E2	C680	*E4	C839	*B2	C1208	A2	CN203	C4	FB1103	*A3	L701	*C3	R66	*C2	R410	*D2	R648	E3	R804	*B2	R1038	B4	RB506	*E1	RB915	C2
C6	*A1	C97	*D3	C505	*E1	C681	*E4	C840	*B2	C1209	A2	CN701	A2	FB1201	*A2	L702	*C4	R67	*C2	R411	*D2	R650	E4	R805	*B2	R1039	*B4	RB507	*E2	RB918	*C2
C7	*A1	C98	*D3	C506	*E1	C682	D3	C841	*B2	C1210	A1					L703	*C4	R68	*C2	R412	*D2	R651	*E4	R806	*B2	R1040	B3	RB508	*E2	RB919	*B2
C8	*A1	C99	*D3	C507	*E1	C683	D3	C842	*B2	C1211	A1	D1	A1	IC1	C1	L704	C4	R69	*C2	R413	D2	R653	E4	R807	*B2	R1041	B3	RB509	*E2	RB920	*C2
C9	*A1	C100	*D3	C508	*E2	C684	*D3	C843	*B2	C1212	A1	D401	*D1	IC2	*C1	L705	D4	R70	*D2	R414	D2	R654	E4	R808	B3	R1042	*B3	RB510	E2	RB921	C2
C10	*A1	C101	*D3	C509	*E1	C685	E4	C844	*B2	C1213	A1	D801	*B2	IC3	*C1	L706	D4	R71	*C2	R415	D2	R660	D4	R809	B3	R1043	*B3	RB511	*E2	RB922	B2
C11	C1	C102	D3	C510	*D1	C686	E4	C845	*B2	C1214	A1			IC4	*B1	L801	*B3	R72	*C2	R416	D2	R661	E4	R810	*B2	R1044	*B3	RB512	*E2	RB923	*B2
C12	C1	C103	*D3	C511	*D1	C687	E4	C846	*B2	C1215	*A1	E1	A3	IC5	*C4	L802	*B3	R73	*C2	R417	D1	R663	*E4	R811	*B2	R1045	B3	RB513	E2	RB924	B2
C13	*A1	C104	*D3	C512	*D1	C688	E4	C847	*B2	C1216	*A1	E2	C3	IC6	C1	L803	*B2	R74	*C2	R418	*D2	R664	*E4	R812	*B2	R1046	*B3	RB514	E1	RB925	B2
C14	C1	C105	D3	C513	*E1	C693	*E4	C848	*B2	C1217	A1	E3	*C1	IC9	*D2	L1001	*A3	R75	*D3	R419	*D2	R665	*E4	R813	*B2	R1047	*B3	RB517	*E1	RB1001	*A3
C15	*D3	C106	*D3	C514	*E1	C694	*E4	C849	B3	C1218	A1	E4	*D4	IC10	*C1	L1002	*A3	R77	*D3	R420	D1	R666	*E4	R814	B3	R1048	*B3	RB518	*E1	RB1002	B3
C16	*A3	C107	D3	C515	*E1	C695	*E4	C850	A1	C1219	A1			IC11	*D3	L1003	B4	R78	*D3	R421	D1	R667	E4	R815	B2	R1049	*B3	RB519	*E1	RB1003	B3
C17	*A2	C108	*D3	C516	*E1	C699	*D3	C851	*B1	C1220	A1	FB1	*A1	IC12	*C1	L1004	*B4	R79	*D3	R422	*E2	R668	*E4	R816	*B3	R1050	*A3	RB520	E1	RB1004	B3
C18	*C3	C109	C1	C517	*E1	C701	*C3	C852	*B1	C1221	A1	FB2	*A1	IC13	*D2	L1005	*B3	R80	*D3	R423	*E2	R669	E4	R817	*B3	R1051	A4	RB521	D1	RB1005	B3
C19	*B4	C111	*C2	C576	D3	C702	*C4	C853	B2	C1222	A1	FB3	C1	IC14	*D3	L1201	A2	R81	*D3	R424	E2	R670	E4	R818	*C3	R1101	*A3	RB522	*D1	RB1006	B3
C20	*A3	C201	C4	C601	*D3	C703	*C4	C854	B1	C1223	*A2	FB4	*C1	IC15	*C2	L1202	A1	R82	*D3	R425	*D2	R671	E4	R819	B3	R1201	B2	RB523	D1	RB1007	B3
C21	A2	C202	C4	C602	*E3	C704	*C3	C855	B1	C1224	A1	FB5	*C1	IC16	*C2	L1203	*A1	R83	*D3	R426	*D2	R672	E4	R820	B2	R1202	B2	RB524	D1	RB1008	B3
C22	A1	C301	*A2	C603	*E3	C705	*C3	C901	*C2	C1225	A1	FB6	*B4	IC17	*C2	L1204	*A1	R84	*D3	R427	*E2	R673	E4	R821	B2	R1203	A2	RB601	D3	RB1009	A1
C23	C1	C302	*A2	C604	*E3	C706	*C4	C902	*C2	C1226	A1	FB7	*B4	IC18	*D3	L1205	*A2	R85	*D3	R428	*D1	R674	E4	R822	B2	R1204	A2	RB602	D3	RB1010	A1
C24	C1	C303	A2	C605	*E3	C707	*C3	C903	*C2	C1227	A2	FB8	*D3	IC301	*B2			R86	*D3	R429	*D2	R675	E4	R826	B2	R1205	A2	RB603	D3	RB1011	*A1
C25	C1	C304	A2	C606	*E2	C708	C4	C904	*C2	C1228	A2	FB9	*D2	IC302	*D3	Q1	*A1	R87	*D3	R430	*D2	R676	*D4	R827	*C3	R1206	A2	RB605	B1	RB1012	*A1
C26	C1	C305	B2	C607	*E3	C709	*C3	C905	*C2			FB10	*D2	IC303	*B1	Q2	*A1	R201	*B1	R431	*E2	R681	E4	R828	B2	R1207	B2	RB606	E2	RB1013	A4
C27	*C1	C306	B2	C608	*E3	C710	*C3	C906	*C2	CL1	A1	FB11	*D2	IC304	C1	Q3	*A1	R202	*B1	R432	D2	R682	E4	R829	*C3	R1208	A2	RB607	E2	RB1014	A4
C28	*C1	C308	*B1	C609	*E3	C711	*C3	C907	*C3	CL2	A1	FB12	*D2	IC305	C1	Q4	*A1	R203	*B1	R433	D2	R683	*E4	R830	*B3	R1209	B2	RB608	E2	RB1015	*A4
C29	*C1	C309	C1	C610	*E3	C712	*C3	C908	*C2	CL3	*C1	FB13	*D2	IC306	*A2	Q5	*A1	R204	*B1	R434	D1	R684	*E4	R831	*B3	R1210	B2	RB609	E2	RB1016	*A4
C30	*C1	C310	C1	C611	*E3	C713	*C4	C909	*C3	CL4	B4	FB14	*D1	IC308	*C3	Q6	C1	R205	*B1	R435	D1	R685	*E4	R832	*B1	R1211	A1	RB610	E2	RB1017	B4
C31	*C1	C311	*A2	C612	*E3	C714	*C4	C910	*C2	CL5	D2	FB15	*D1	IC309	*D4	Q7	C1	R206	*B1	R436	*D1	R686	*E4	R833	*B1	R1212	A1	RB611	E2	RB1018	*A4
C32	*C1	C314	*D3	C613	*E3	C715	*C4	C911	*B2	CL6	D1	FB16	*D1	IC310	*D3	Q8	C1	R207	B1	R437	*D1	R687	*E4	R834	B1	R1213	A1	RB612	E2	RB1019	*B4
C33	*C1	C315	*D4	C614	*E2	C716	*C3	C912	*B2	CL7	D2	FB17	*D1	IC400	D2	Q9	A1	R208	B1	R438	*D1	R688	E4	R835	B2	R1214	A1	RB613	E2	RB1020	B4
C34	*C4	C316	*D4	C615	*E3	C717	*C3	C913	*B2	CL8	D3	FB18	*D2	IC401	*D1	Q10	A1	R209	B1	R439	*D1	R689	*E4	R836	B2	R1215	A1	RB616	B1	RB1021	*B4
C35	*C4	C317	*D4	C616	*E3	C718	*C4	C914	*C2	CL300	B2	FB19	*D2	IC402	*D1	Q11	A1	R210	B1	R440	D2	R690	E4	R837	*B2	R1216	A1	RB630	E3	RB1022	B4
C36	*C4	C318	*D3	C617	*E3	C719	*C4	C915	*C2	CL301	*A2	FB20	*D2	IC403	D2	Q12	C1	R211	*B1	R441	*D2	R691	E4	R838	*B2	R1217	A1	RB631	E3	RB1023	*B4
C37	*C4	C322	*C3	C618	*E2	C720	*C3	C916	*C2	CL400	*D2	FB21	*D2	IC404	D1	Q1201	A1	R214	*B1	R442	*D2	R692	E4	R839	*B2	R1218	A1	RB632	E3	RB1101	A3
C38	*C4	C323	*C3	C619	*E2	C721	*C3	C917	*B2	CL401	*D2	FB22	*D2	IC500	E2			R215	*B1	R500	E1	R693	E4	R840	*B2	R1219	A1	RB633	E3	RB1102	A3
C39	*C4	C400	*D2	C620	*E3	C722	*C4	C918	*C2	CL402	*D1	FB23	*D2	IC501	E1	R1	*A1	R216	*B1	R501	E1	R694	E4	R841	B2	R1220	A1	RB634	E3	RB1103	A3
C40	A1	C401	*D2	C621	*E3	C723	*C4	C1001	*B4	CL403	*D2	FB24	*D2	IC601	E3	R2	*A1	R217	*A1	R502	E2	R697	E4	R842	*B3	R1221	A1	RB635	E3	RB1104	A3
C41	*A1	C402	*D1	C622	*E3	C724	C4	C1002	*A3	CL404	*D2	FB25	*C2	IC605	*D3	R3	*A1	R218	A1	R503	E2	R698	E4	R843	*B3	R1222	A1	RB636	D3	RB1105	A3
C42	*A1	C403	*D2	C623	*E3	C725	*C3	C1003	*A3	CL405	*D2	FB26	*D3	IC606	B1	R4	*A1	R219	*A1	R509	E2	R699	E4	R844	B2	R1223	*A1	RB637	B1	RB1106	A3
C43	*D3	C404	*D2	C624	*E3	C726	*A2	C1004	*B4	CL406	E2	FB27	*D3	IC607	E4	R5	C1	R220	*A1	R510	E2	R701	B3	R901	C2	R1224	A1	RB701	A2	RB1107	A3
C44	*D2	C405	*D2	C625	*E3	C727	*A2	C1005	*A3	CL407	*D2	FB28	*D3	IC608	E4	R6	C1	R222	*D4	R511	E2	R702	C3	R902	C2	R1225	A1	RB702	*A2	RB1108	A3
C45	*D3	C406	*E2	C626	*E3	C728	*A3	C1006	*A3	CL408	E2	FB29	*D3	IC610	*E4	R7	C1	R223	*E4	R512	E2	R703	*C3	R903	C2	R1226	A2	RB703	*A2	RB1109	A3
C46	*D3	C407	*E2	C627	*E2	C729	*C3	C1007	*B3	CL409	*E2	FB30	*D3	IC611	*D3	R8	*C1	R224	E4	R513	E2	R705	B3	R904	C2	R1227	A2	RB704	A2	RB1110	A3
C47	*D3	C408	*D2	C628	*E3	C730	B4	C1008	*B3	CL410	*D2	FB31	*D3	IC701	C3	R9	C1	R225	E4	R514	E2	R706	D4	R910	C3	R1228	A1	RB705	A2	RB1111	A3
C48	*D2	C409	*D2	C629	*E3	C731	C4	C1009	*B3	CL411	D2	FB32	*D3	IC702	*A2	R10	C1	R226	E4	R515	D1	R707	B3	R911	C3	R1229	A2	RB706	A2	RB1112	A3
C49	*D2	C410	*E2	C630	*E3	C732	B3	C1010	*A3	CL412	E2	FB301	A2	IC703	*A2	R11	*C1	R227	*B1	R516	E1	R708	*C3	R912	C2	R1230	A2	RB707	*A2	RB1113	A3
C50	*D3	C411	*E2	C631	*E3	C733	B4	C1011	*B3	CL413	*E2	FB302	*A2	IC704	*A3	R12	*C1	R228	*E4	R517	D1	R709	*C3	R913	C2	R1231	A1	RB708	A2	RB1114	A3
C51	*D3	C412	*E2	C632	*E2	C734	D4	C1012	*A3	CL414	E2	FB303	*B1	IC705	C4	R13	*B1	R301	*A2	R518	*D1	R710	*C3	R914	C2	R1232	A2	RB709	B3	RB1203	A3
C52	D2																														



CN-3069, CN-3070, CN-3071, CN-3072, CN-3073, CN-3074





CN-3069 (1-879-607-11)			
* : B SIDE			
C1	B2	FB9	A2
C2	B2	FB10	A2
C3	B2	FB11	A2
C4	A2	FB12	A2
C5	A2	FB13	A2
C6	A2	FB14	A2
C7	A2	FB15	A2
C8	A2	FB16	A2
C9	A2	FB17	A1
C10	A2	FB18	A1
C11	A1	FB19	A1
C12	A1	FB20	A1
C13	A2		
C14	A1	FL1	B2
C15	A2	FL2	B2
C16	A2		
C19	B2	JC1	B2
		JC2	A1
CN1	B1		
CN2	A2	R1	B2
		R2	B2
FB1	A2	R3	B2
FB2	A2	R4	B2
FB3	A2		
FB4	A2		
FB5	A2		
FB6	A2		
FB7	A2		
FB8	A2		





CN-3070 (1-879-608-11)			
* :B SIDE			
C1	A1	FB2	A1
C2	A1	FB3	B1
C3	A1	FB4	B1
C4	A1	FB5	B1
C5	B1	FB6	B1
C6	B1	FB7	A1
C7	B1	FB8	B1
C8	B1	FB9	B1
C9	B1	FB10	B1
C10	B1	FB11	A1
C11	B1	FB12	A1
C12	A1	FB13	B2
CN1	B1		
CN2	A2		
FB1	A1		





CN-3071 (1-879-609-11)	
*:B SIDE	
C2	A1
CN1	A1
CN3	A1
FB1	A1
FB2	A1
FB3	A1
FB4	A1
FB5	A1
FB6	A1
L2	A1




CN-3072 (1-879-611-11)	
*:B SIDE	
C1	A1
C2	A1
C3	A1
CN1	A1
CN2	A1
D1	A1
D2	A1
D3	A1
FB1	A1
FB2	A1
FB3	A1
FB4	A1
L1	A1
R1	A1
R2	A1




CN-3073 (1-879-596-11)	
*:B SIDE	
C1	A1
C2	A1
CN1	A1
CN2	A1
L1	A1



CN-3074 (1-879-597-11)	
*:B SIDE	
C1	A1
C2	A1
CN1	A1
CN2	A1
FB1	A1
FB2	A1
FB3	A1
FB4	A1
FB5	A1
FB6	A1



CN-3075 -A SIDE-
SUFFIX: -11




CN-3075 -B SIDE-
SUFFIX: -11

CN-3075 (1-879-598-11)


*:B SIDE

CN1 A1
CN2 A1
CN3 A1

R1 A1
R2 A1
R3 A1
R5 A1
R6 A1
R7 A1



CN-3077 -A SIDE-
SUFFIX: -11



CN-3077 -B SIDE-
SUFFIX: -11

CN-3077 (1-879-600-11)


*:B SIDE

C1 A1
C2 A1


CN1 A1
CN2 A1
CN3 A1

FB1 A1
FB2 A1
FB3 A1
FB4 A1
FB5 A1
FB6 A1
FB7 A1
FB8 A1
FB9 A1
FB10 A1

L1 A1
L2 A1

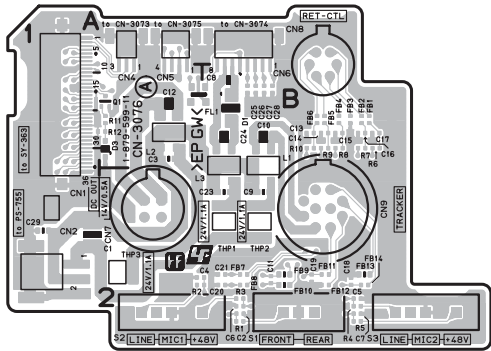

CN-3076 -A SIDE-
SUFFIX: -11

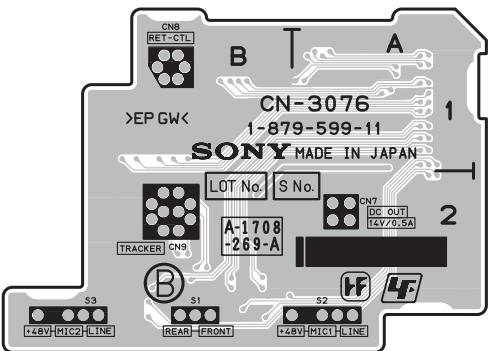

CN-3076 -B SIDE-
SUFFIX: -11

CN-3076 (1-879-599-11)


*:B SIDE

C1 A2 FL1 A1
C2 B2
C3 A1 L1 B1
C4 A2 L2 A1
C5 B2 L3 B1
C6 B2
C7 B2 Q1 A1
C8 B1
C9 B2 R1 B2
C10 B1 R2 A2
C11 B2 R3 B2
C12 A1 R4 B2
C13 B1 R5 B2
C14 B1 R6 B1
C15 B1 R7 B1
C16 B1 R8 B1
C17 B1 R9 B1
C18 B2 R10 B1
C19 B2 R11 A1
C20 B2 R12 A1
C21 B2
C23 B2 S1 B2
C24 B1 S2 A2
C25 B1 S3 B2
C26 B1
C27 B1 THP1 B2
C28 B1 THP2 B2
C29 A2 THP3 A2


CN1 A1
CN2 A2
CN4 A1
CN5 A1
CN6 B1
CN7 A2
CN8 B1
CN9 B2

D1 B1
D3 A1

FB1 B1
FB2 B1
FB3 B1
FB4 B1
FB5 B1
FB6 B1
FB7 B2
FB8 B2
FB9 B2
FB10 B2
FB11 B2
FB12 B2
FB13 B2
FB14 B2



CN-3078 -A SIDE-
SUFFIX: -11



CN-3078 -B SIDE-
SUFFIX: -11

CN-3078 (1-879-613-11)

*:B SIDE

C1 A1
C2 A1
C3 A1

CN1 A1
CN2 A1


FB1 A1
FB2 A1
FB3 A1
FB4 A1
FB5 A1
FB6 A1

DPR-298 (1-879-603-11)


*:B SIDE

C1	A2	C148	B1	C255	A3	C554	*D2	C646	E4	C790	*D4	C924	*D3	CL401	C3	FB911	*B2	IC802	*D4	L821	*C4	R123	A1	R235	A2	R407	C3	R619	*E4	R714	D2	R817	E3
C2	A2	C149	*B4	C256	A2	C555	*D2	C647	D3	C791	E3	C925	*D3	CL402	C3	FB912	*B3	IC803	*D4	L822	*C4	R124	*A1	R236	A2	R408	C3	R620	*D4	R715	D3	R818	*E3
C3	A2	C150	B3	C257	A2	C556	*D2	C648	E4	C792	E3	C926	*D3	CL403	C3	FB913	*B2	IC804	*C4	L823	*C4	R125	*B1	R237	A3	R409	C3	R621	D1	R716	D3	R819	E3
C4	A2	C151	B3	C258	A3	C557	*D2	C649	D3	C793	*E3	C927	*D3	CL501	D1	FB914	*B2	IC805	*D4	L824	*E3	R126	*B1	R238	A2	R410	C3	R622	*E4	R717	D3	R820	*E3
C5	A2	C154	A3	C259	A3	C558	*D2	C650	E4	C794	*E3	C928	*D3	CL502	D1	FB915	*B1	IC806	*D4	L825	*E1	R127	A1	R239	A2	R411	C3	R623	E4	R718	C4	R821	E3
C6	A2	C162	D1	C260	A2	C559	*D2	C651	*D2	C795	*E3	C929	*D3	CL601	D1	FB916	*B2	IC807	*C4	L826	*E1	R128	A1	R240	A2	R412	C3	R624	E4	R731	*C4	R822	*E3
C51	*A4	C163	D1	C261	A2	C560	*D2	C652	*C2	C796	*E3	C930	*D3	CL602	C1			IC808	E3	L827	E1	R129	A1	R241	A3	R413	C3	R625	E4	R732	*D4	R823	E3
C52	*A4	C164	A3	C262	A2	C561	*C2	C653	*C3	C797	*E3	C931	*B3	CL603	*E3	FL201	A3	IC809	*C4			R130	A1	R242	A2	R414	C3	R626	E4	R733	*D4	R824	E3
C53	*A4	C166	A3	C263	A2	C562	*D2	C654	*C3	C798	*E3	C932	*B3	CL701	D3	FL202	A2	IC810	*E2	Q104	A3	R131	A1	R243	A2	R415	C3	R627	E4	R734	*C4	R825	*C4
C54	*A4	C170	*B4	C264	A3	C563	*D2	C655	*C3	C799	*E3	C933	*B3	CL702	D3	FL203	A2	IC812	*D2	Q105	A3	R132	B1	R244	A2	R416	C3	R628	E4	R735	*D4	R826	E3
C55	A3	C171	*B4	C265	A2	C564	*D2	C656	*C2	C800	*E3	C934	*B3	CL703	D2			IC813	*E2	Q106	*A4	R133	B1	R245	A2	R417	C3	R629	E4	R736	*D4	R827	E3
C56	A3	C172	*B4	C266	A2	C565	*D2	C657	*D2	C801	*E3	C935	*B3	CL704	D2	IC101	*A3	IC901	*A4	Q107	*A4	R134	*B4	R246	A2	R418	C3	R630	E4	R737	*C4	R828	*C4
C57	*A4	C173	*B4	C267	A2	C566	*D2	C658	*B3	C802	*E3	C936	*B3	CL801	E3	IC102	A3	IC902	*D2	Q108	*B4	R135	*B4	R247	A2	R419	C3	R631	E4	R738	*D4	R829	*C4
C59	A4	C174	*C1	C268	A2	C567	*D2	C659	*D2	C803	*C4	C937	*B3	CL802	D3	IC103	A3	IC904	*D2	Q111	*B4	R136	*B4	R248	A1	R420	C3	R632	E4	R739	*D4	R830	*C4
C60	A4	C175	C1	C269	A2	C568	*D2	C660	*B3	C804	E3	C938	*B3	CL803	D3	IC104	*A3	IC905	*D3	Q112	*B4	R137	*A3	R249	A2	R421	C3	R633	E1	R740	*C4	R831	*C4
C61	A3	C176	*B4	C270	A3	C569	*D2	C661	*C2	C805	C4	C939	*B3	CL804	D3	IC105	*A1	IC906	*B3	Q113	*B2	R139	*B4	R250	A2	R422	C3	R634	D1	R741	*C4	R832	*C4
C62	A3	C177	*B4	C271	A3	C570	*D2	C662	*B2	C806	*C4	C940	*B4	CL805	*E2	IC106	*B1	IC907	*B2	Q114	B1	R140	*B4	R251	A2	R423	C3	R635	E4	R742	*D4	R833	D3
C63	A4	C178	*B4	C272	A2	C571	*D2	C663	*C3	C807	*C4	C941	*B3			IC107	*B1	IC908	*B2	Q401	C3	R141	*B4	R252	A2	R424	C3	R636	E1	R743	*D4	R834	D3
C64	A4	C181	*B4	C273	A2	C572	*D1	C664	*D4	C808	*C4	C942	*B3	CN1	*A2	IC108	A1	IC909	*C3	Q402	*C2	R144	A3	R253	A2	R425	C3	R637	D1	R744	*D4	R835	D3
C65	A3	C182	*B4	C274	A2	C573	*C2	C665	*E4	C809	*E3	C943	*B3	CN101	B4	IC109	A1	IC910	*B3	Q601	*E4	R147	*B4	R254	A2	R426	C3	R638	E4	R745	*D4	R836	D3
C66	A3	C183	B4	C275	A2	C574	*D2	C666	*E4	C810	C4	C944	*B3	CN102	*C1	IC110	*B4	IC911	*B3	Q602	E4	R152	*B4	R255	A2	R427	C3	R639	D4	R746	*C4	R837	D3
C69	*A3	C184	*C3	C276	A3	C575	*D2	C667	*E3	C811	C4	C945	*B3	CN801	*E1	IC111	*B4	IC912	*B3	Q603	D4	R153	*B4	R256	A2	R428	C3	R640	D4	R747	*C4	R838	D3
C70	*A3	C185	C4	C277	A2	C576	*D2	C668	*E3	C812	*C4	C946	*B4	CN901	*E3	IC112	A3	IC913	*C3	Q604	D4	R154	*B4	R257	A2	R429	*C3	R641	D4	R748	*C4	R839	*C4
C71	*A3	C186	*B4	C278	A2	C577	*D1	C669	*E3	C813	*C4	C947	*B4			IC181	*B4			Q605	D4	R155	*B4	R258	A2	R430	*C3	R642	E4	R749	*D4	R840	*C4
C72	A3	C187	*C4	C279	A3	C578	*D1	C670	*D4	C814	*C4	C948	*B3	D101	*A1	IC182	*B4	JC1	*A4	Q606	D4	R156	*A1	R259	A2	R431	*C3	R643	E4	R750	*D4	R841	*C4
C73	*A3	C188	*B4	C280	A3	C579	*D1	C671	*E4	C815	*C4	C949	*B3	D102	A3	IC183	*C3	JC2	*A4	Q607	E4	R157	*B2	R260	A2	R432	*C3	R644	E4	R751	*D4	R842	*C4
C74	*A3	C189	C4	C281	A2	C580	*C2	C672	*C2	C816	*E3	C950	*B3	D103	A3	IC184	C1	JC3	A4	Q805	E2	R158	*B2	R261	A2	R433	*C3	R645	D4	R752	*D4	R843	*C4
C80	*A3	C190	*C3	C282	A2	C581	*D2	C673	*C2	C817	*E3	C951	*B3	D104	*A3	IC185	*C4	JC4	A1	Q806	E3	R159	*B2	R262	A2	R434	*C3	R646	E4	R753	*D4	R844	*C4
C82	A3	C191	*B4	C283	A2	C582	*D2	C674	*B2	C818	*E3	C952	*B2	D105	*B4	IC186	*C4	JC5	A1			R160	*B2	R263	A3	R435	*C3	R647	D4	R754	*D4	R845	E2
C83	A3	C192	C1	C284	A2	C583	*D2	C675	B2	C819	*C4	C953	*B2	D401	*C3	IC187	*B4	JC6	*A1	R51	*A4	R161	*B2	R264	A3	R436	C2	R648	E4	R755	*C4	R846	*E2
C84	A3	C193	B3	C285	B3	C584	*D2	C701	*D3	C820	*C4	C954	*B2	D501	D1	IC188	C4			R52	A4	R162	B2	R265	A2	R437	*C2	R649	D4	R756	*D4	R847	E2
C85	A3	C194	A3	C286	B2	C585	*D2	C702	*D3	C821	*C4	C955	*B2	D502	D1	IC189	*B4	L101	A4	R53	A4	R163	B1	R266	A2	R501	D1	R650	D4	R757	*D4	R848	E3
C86	A3	C195	A3	C287	B2	C586	*D1	C731	C4	C822	*C4	C956	*B2	D601	*E4	IC190	B4	L104	*A1	R54	A4	R164	B1	R267	A3	R502	D1	R651	E1	R758	*C4	R849	*E2
C87	A3	C196	A2	C288	A3	C587	*D1	C732	D4	C823	*E3	C957	*B2	D602	*D4	IC201	A3	L105	*A3	R55	A4	R165	B1	R268	A2	R503	D1	R652	E1	R759	*D4	R850	*E2
C88	A3	C197	A3	C289	A2	C588	*D1	C733	D4	C824	*C4	C958	*B2	D603	D4	IC202	A2	L106	*A1	R56	A3	R166	B2	R269	A2	R504	D1	R653	E1	R760	*D4	R851	*E2
C89	A3	C198	A3	C290	A2	C589	D1	C734	C4	C825	*E2	C959	*B2	D604	E4	IC203	A2	L107	*A3	R57	A3	R167	*C2	R270	A3	R505	D1	R654	D1	R761	*C4	R852	*E2
C90	A3	C199	A2	C291	*A2	C590	*D1	C735	D4	C826	*E2	C960	*B3	D605	E4	IC204	A2	L108	*A1	R58	A3	R168	*C2	R271	A3	R506	D1	R655	E1	R762	*C4	R853	*E2
C91	A3	C201	A3	C292	*A2	C591	*D2	C736	D4	C827	*E2	C961	*B3	D606	E4	IC205	A2	L109	A1	R59	A3	R181	*C3	R272	A2	R507	D1	R656	E1	R763	*D4	R854	*E2
C92	A3	C202	A2	C293	*A2	C592	*D2	C737	C4	C828	E1	C962	*B3			IC206	A2	L110	B1	R64	*A3	R182	*C3	R273	A2	R508	C2	R657	D1	R764	*D4	R855	*E2
C93	A3	C203	A2	C294	*A2	C593	*C2	C738	*C4	C829	*E2	C963	*B2	E1	*A4	IC207	A3	L111	B1	R65	A4	R183	*C3	R274	A2	R509	D1	R658	D1	R765	*D4	R856	*E2
C94	A3	C204	A3	C295	*A2	C594	C1	C739	D4	C830	E2	C964	*B2	E2	B1	IC208	A2	L114	*B4	R66	*A3	R184	*C3	R275	A2	R510	*D2	R659	D1	R766	*D4	R857	E3
C95	C4	C205	A2	C296	*A2	C595	*C1	C740	*D4	C831	*E2	C965	*B2	E3	*D1	IC209	A2	L115	*B4	R67	*A3	R185	B4	R276	A3	R511	*D2	R660	*E4	R767	*C4	R858	*E2
C96	*C2	C206	A2	C297	*A3	C596	C1	C741	D4	C832	*E2	C966	*B3	E4	*C3	IC210	*A2	L201	A3	R68	*A3	R186	*C4	R277	A2	R512	*D2	R661	*E4	R768	*C4	R859	*E2
C97	*E3	C207	A3	C298	*A3	C597	*C2	C742	*D4	C833	*E2	C967	*B3			IC211	*A2	L202	A3	R69	*A3	R187	*C4	R278	A2	R513	D2	R662	D1	R769	*C4	R860	E2
C98	*A3	C208	A3	C301	*A2	C598	*C2	C743	*C4	C834	E2	C968	*B2	FB102	A3	IC212	*A2	L203	A2	R70	A4	R188	*C3	R279	*A2	R514	D2	R663	E4	R770	*D4	R861	E2
C99	*A1	C209	A2	C302	*A1	C599	*D2	C744	*D4	C836	*E2	C969	*B2	FB103	A3	IC213	*A2	L204	A3	R71	A4	R189	*C4	R280	*A2	R515	D2	R664	D4	R771	*D4	R862	E2
C100	*B1	C210	A2	C401	*C3	C600	*C2	C745	*D4	C837	E1	C970	*B2	FB104	A3	IC214	*A2	L205	A2	R72	*A4	R190	B4	R281	*A2	R516	D2	R665	D4	R772	*D4	R863	*E2
C101	*B1	C211	A2	C402	*C3	C601	*D1	C746	C4	C838	E2	C971	*B3	FB105	*A1	IC215	*A2	L206	A2	R73	A3	R191	*B4	R282	*A2	R517	D1	R666	D4	R773	*D4	R864	E2
C102	*A1	C212	A2	C403	*C3	C602	*C2	C747	D4	C839	*E2	C972	*B2	FB106	*B1	IC216	B4	L207	A2	R74	A3	R192	C4	R283	*A2	R518	*D1	R667	D4				


R908	* A4	RB355	B1	RB528	* D1	RB809	* D3
R909	* A4	RB356	B3	RB529	* D1	RB810	* C3
R910	* A4	RB357	B3	RB530	* D1	RB811	* C3
R911	* A4	RB358	B3	RB531	* D1	RB812	* C3
R912	* B4	RB359	B3	RB532	* D1	RB813	E3
R913	* B2	RB360	B3	RB533	* D1	RB814	D3
R914	* B2	RB361	B3	RB534	C2	RB815	D3
R915	* B1	RB362	B3	RB535	C2	RB816	D3
R916	* B1	RB363	B3	RB536	C2	RB817	* E2
R917	* B2	RB364	B3	RB537	C2	RB818	* E2
R918	* B2	RB365	B3	RB538	C2	RB819	* E2
R919	* B2	RB366	B3	RB539	D2	RB820	* E2
R920	* B2	RB367	B3	RB540	D2	RB821	* E2
R922	* B3	RB368	* B3	RB541	D2	RB901	B4
R923	* B3	RB369	* B3	RB542	C2	RB902	* D2
R924	* C3	RB370	* B3	RB543	C2	RB903	* D2
R925	* B3	RB371	B2	RB544	C2	RB904	* D2
R926	* B2	RB372	B2	RB545	D2	RB905	* D2
R927	* B3	RB373	B2	RB601	C1	RB906	* C3
R928	* B3	RB374	B2	RB602	C2	RB907	* D3
R929	E2	RB375	B2	RB603	C1	RB908	* D2
R930	E2	RB376	B2	RB604	C1	RB909	* D2
R931	* D3	RB377	B2	RB605	C2	RB910	* D2
R932	* D3	RB378	B2	RB606	* C2	RB911	D3
R933	D3	RB379	B2	RB607	* C1	RB912	* B3
R934	* D3	RB380	B2	RB608	* C2	RB913	* E2
		RB381	B2	RB609	* C2	RB914	* B2
RB181	* B4	RB382	B2	RB610	* C1	RB915	* B1
RB182	B4	RB383	* B2	RB611	C2	RB916	* B4
RB183	C4	RB384	* B2	RB612	C2	RB917	* B4
RB184	B4	RB385	* B2	RB613	C1	RB918	* D3
RB185	* B4	RB386	B1	RB614	C1	RB919	* B3
RB186	* C4	RB387	B1	RB615	C2		
RB187	* C4	RB401	C3	RB616	C2	S901	* E2
RB188	* C4	RB402	C3	RB617	C1		
RB189	* C4	RB403	C3	RB618	C1	THP101	A3
RB190	* B4	RB404	C2	RB619	* C1	THP102	A3
RB191	* B4	RB405	C2	RB620	* C1	THP103	A4
RB192	C4	RB406	C2	RB621	* C2	THP104	A4
RB193	C4	RB407	C2	RB622	* C2	THP105	* A1
RB194	* B4	RB408	C3	RB623	* C1	THP106	* B1
RB195	* B4	RB409	C3	RB624	* C1	THP107	* B1
RB196	* C3	RB410	C3	RB625	* C2	THP108	B3
RB197	* C3	RB411	C3	RB626	* C2		
RB198	C3	RB412	C3	RB627	* E1	TP501	* D2
RB199	C3	RB413	C3	RB628	D1	TP502	* D1
RB200	* B3	RB414	C3	RB629	* D1	TP601	* E3
RB201	* B3	RB415	C2	RB630	E3	TP602	* D2
RB202	* C4	RB416	C2	RB701	D3	TP801	* D4
RB203	* C4	RB417	C2	RB702	* D3	TP802	* D4
RB204	* C4	RB418	C2	RB703	* D3	TP803	* D4
RB205	* C4	RB419	C2	RB704	D3	TP804	* E3
RB206	* B4	RB420	C2	RB705	C3	TP805	* D4
RB207	* B4	RB421	C2	RB706	D3		
RB208	* B4	RB422	* C3	RB707	D3	X601	D4
RB209	* B4	RB423	C2	RB708	D2	X602	D4
RB210	C4	RB424	* D1	RB709	D2	X603	E4
RB211	C4	RB425	C3	RB710	D1	X801	* E2
RB301	B3	RB426	C3	RB711	C3		
RB302	B3	RB427	C3	RB712	D3		
RB303	B3	RB428	C3	RB713	D3		
RB304	B3	RB429	C3	RB714	C3		
RB305	B4	RB430	C3	RB715	D3		
RB306	* B3	RB431	C3	RB716	D3		
RB307	* B3	RB501	* D2	RB717	D3		
RB308	* B4	RB502	D2	RB718	D3		
RB309	* B4	RB503	D2	RB719	D2		
RB317	B3	RB504	D2	RB720	D3		
RB318	B2	RB505	D2	RB721	D2		
RB319	B2	RB506	D2	RB722	D3		
RB320	B2	RB507	* D2	RB723	D3		
RB321	B3	RB508	D2	RB724	C3		
RB322	B3	RB509	D2	RB725	C3		
RB323	* B2	RB510	D2	RB727	C3		
RB324	* B3	RB511	D2	RB729	D3		
RB325	* B3	RB512	D2	RB731	C3		
RB326	* B3	RB513	* C1	RB733	D3		
RB334	B2	RB514	* C1	RB735	D3		
RB335	* A1	RB515	* C1	RB737	D2		
RB336	* A2	RB516	* C1	RB740	D2		
RB337	* A1	RB517	* C1	RB742	D3		
RB338	* A2	RB518	* C1	RB744	D3		
RB339	B1	RB519	C1	RB757	* D3		
RB340	B2	RB520	C1	RB801	* C3		
RB341	B2	RB521	C1	RB802	* C3		
RB342	B2	RB522	C1	RB803	* C3		
RB343	B2	RB523	C1	RB804	* D3		
RB344	* B2	RB524	* C1	RB805	* D3		
RB345	* B2	RB525	* C1	RB806	* D3		
RB346	* B2	RB526	* C1	RB807	* D3		
RB347	* B2	RB527	D1	RB808	* D3		

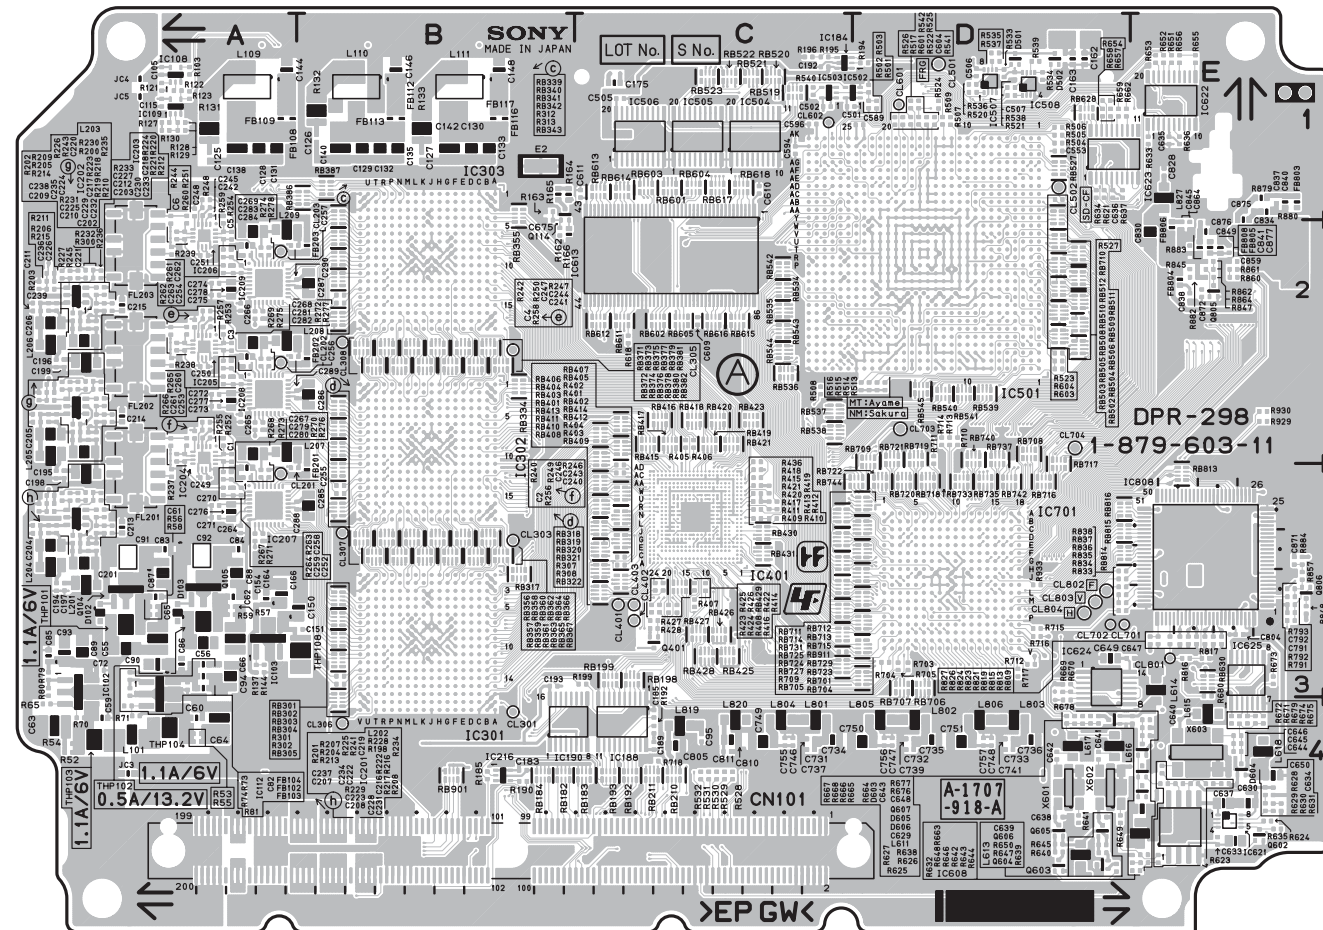


DPR-298 -A SIDE-SUFFIX: -11

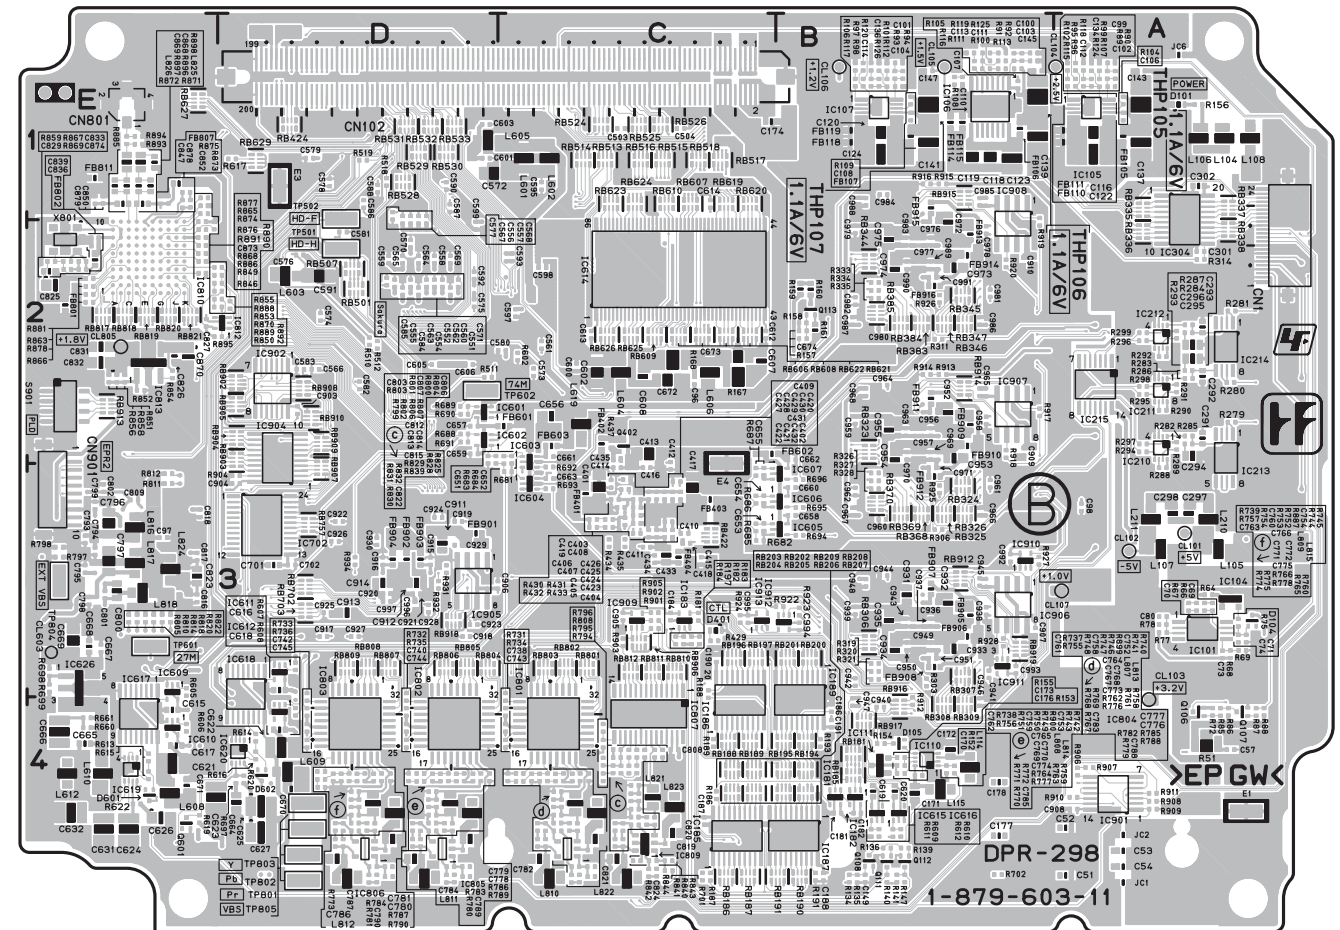


DPR-298 -B SIDE-
SUFFIX: -11

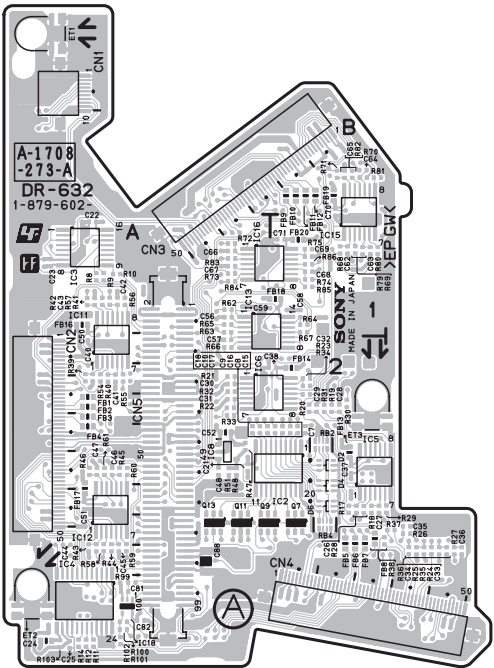


DR-632 -A SIDE-
SUFFIX: -11, 12

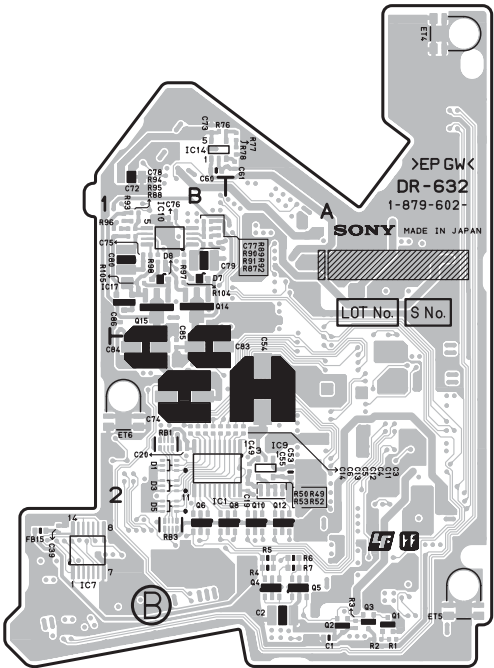

DR-632 -B SIDE-
SUFFIX: -11, 12

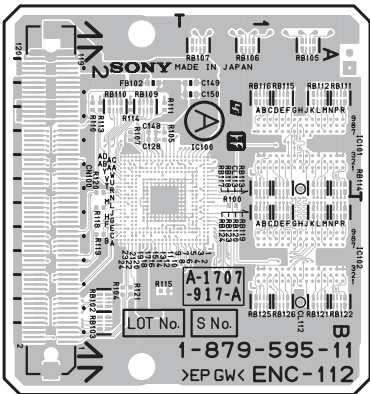

ENC-112 -A SIDE-
SUFFIX: -11

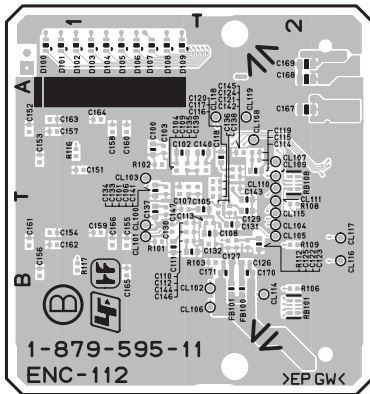

ENC-112 -B SIDE-
SUFFIX: -11

DR-632 (1-879-602-11, 12)


*:B SIDE

C1	* A2	C48	A2	D1	* B2	IC11	A2	R26	B2	R73	A1
C2	* A2	C49	* A2	D2	B2	IC12	A2	R27	B2	R74	B1
C3	* A2	C50	A2	D3	* B2	IC13	A1	R28	B2	R75	B1
C4	* A2	C51	A2	D4	B2	IC14	* B1	R29	B2	R76	* B1
C5	* B2	C52	A2	D5	* B2	IC15	B1	R30	B2	R77	* A1
C6	* B2	C53	* A2	D6	B2	IC16	A1	R31	B2	R78	* A1
C7	B2	C54	* A2	D7	* B1	IC17	* B1	R32	A2	R79	B1
C8	B2	C55	* A2	D8	* B1	IC18	A2	R33	A2	R80	B1
C9	B2	C56	A1					R34	B2	R81	B1
C10	A2	C57	A2	ET1	A1	Q1	* A2	R35	B2	R82	B1
C11	* A2	C58	B1	ET2	A2	Q2	* A2	R36	B2	R83	A1
C12	* B2	C59	B1	ET3	B2	Q3	* A2	R37	B2	R84	A1
C13	* B2	C60	* B1	ET4	* A1	Q4	* A2	R38	B2	R85	B1
C14	* B2	C61	* A1	ET5	* A2	Q5	* A2	R39	A2	R86	B1
C15	B2	C62	B1	ET6	* B2	Q6	* B2	R40	A2	R87	* B1
C16	B2	C63	B1			Q7	B2	R41	A1	R88	* B1
C17	A2	C64	B1	FB1	A2	Q8	* A2	R42	A1	R89	* B1
C18	A2	C65	B1	FB2	A2	Q9	A2	R43	A2	R90	* B1
C19	* A2	C66	A1	FB3	A2	Q10	* A2	R44	A2	R91	* B1
C20	* B2	C67	A1	FB4	A2	Q11	A2	R45	A2	R92	* B1
C21	A2	C68	B1	FB5	B2	Q12	* A2	R46	A2	R93	* B1
C22	A1	C69	B1	FB6	B2	Q13	A2	R47	A2	R94	* B1
C23	A1	C70	B1	FB7	B2	Q14	* B1	R48	A2	R95	* B1
C24	A2	C71	B1	FB8	B2	Q15	* B1	R49	* A2	R96	* B1
C25	A2	C72	* B1	FB9	B1			R50	* A2	R97	* B1
C26	B2	C73	* B1	FB10	B1	R1	* A2	R51	A2	R98	* B1
C27	B2	C74	* B2	FB11	B1	R2	* A2	R52	* A2	R99	A2
C28	B2	C75	* B1	FB12	B1	R3	* A2	R53	* A2	R100	A2
C29	B2	C76	* B1	FB13	B2	R4	* A2	R54	A2	R101	A2
C30	A2	C77	* B1	FB14	B2	R5	* A2	R55	A2	R102	A2
C31	A2	C78	* B1	FB15	* B2	R6	* A2	R56	A1	R103	A2
C32	B2	C79	* B1	FB16	A1	R7	* A2	R57	A1	R104	* B1
C33	B2	C80	* B1	FB17	A2	R8	A1	R58	A2	R105	* B1
C34	B2	C81	A2	FB18	B1	R9	A1	R59	A2		
C35	B2	C82	A2	FB19	B1	R10	A1	R60	A2	RB1	* B2
C36	B2	C83	* B2	FB20	B1	R11	A2	R61	A2	RB2	B2
C37	B2	C84	* B2			R12	A2	R62	A1	RB3	* B2
C38	B2	C85	* B2	IC1	* B2	R14	A2	R63	A1	RB4	B2
C39	* B2	C86	* B1	IC2	B2	R17	B2	R64	B1		
C40	A2	C88	A2	IC3	A1	R18	B2	R65	A1		
C41	A2			IC4	A2	R19	B2	R66	A2		
C42	A1	CN1	A1	IC5	B2	R20	B2	R67	B1		
C43	A1	CN2	A2	IC6	A2	R21	A2	R68	B1		
C44	A2	CN3	A1	IC7	* B2	R22	A2	R69	B1		
C45	A2	CN4	B2	IC8	A2	R23	B2	R70	B1		
C46	A2	CN5	A2	IC9	* A2	R24	B2	R71	B1		
C47	A2			IC10	* B1	R25	B2	R72	A1		


ENC-112 (1-879-595-11)

*:B SIDE

C100	* A1	C147	* B1	CN100	B2	RB105	A1
C101	* A1	C148	A2			RB106	A1
C102	* A1	C149	A1	D100	* A1	RB107	A1
C103	* A1	C150	A1	D101	* A1	RB108	* A2
C104	* A1	C151	* A1	D102	* A1	RB109	A2
C105	* B2	C152	* A1	D103	* A1	RB110	A2
C106	* A1	C153	* A1	D104	* A1	RB111	A1
C107	* B1	C154	* B1	D105	* A1	RB112	A1
C108	* B2	C155	* B1	D106	* A1	RB113	A1
C109	* A1	C156	* B1	D107	* A1	RB114	A1
C110	* B1	C157	* A1	D108	* A1	RB115	A1
C111	* B1	C158	* A1	D109	* A1	RB116	A1
C112	* B1	C159	* B1			RB117	A1
C113	* B2	C160	* A1	FB100	* B2	RB118	A1
C114	* A2	C161	* B1	FB101	* B2	RB119	B1
C115	* A2	C162	* B1	FB102	A2	RB120	B1
C116	* A2	C163	* A1			RB121	B1
C117	* A2	C164	* A1	IC100	B2	RB122	B1
C118	* A2	C165	* B1	IC101	A1	RB123	B1
C119	* A2	C166	* B1	IC102	B1	RB124	B1
C120	* A2	C167	* A2			RB125	B1
C121	* A2	C168	* A2	R100	B1	RB126	B1
C122	* B2	C169	* A2	R101	* B1		
C123	* B2	C170	* B2	R102	* A1		
C124	* A2	C171	* B2	R103	* B2		
C125	* B2			R104	B2		
C126	* B2	CL100	* B1	R105	A2		
C127	* B2	CL101	* B1	R106	* B2		
C128	A2	CL102	* B2	R107	A2		
C129	* B2	CL103	* A1	R108	* B2		
C130	* B1	CL104	* B2	R109	* B2		
C131	* B2	CL105	* B2	R110	A2		
C132	* B2	CL106	* B2	R111	A2		
C133	* A1	CL107	* A2	R112	* B2		
C134	* A1	CL108	* A2	R113	A2		
C135	* A2	CL109	* A2	R114	A2		
C136	* B2	CL110	* A2	R115	B2		
C137	* B1	CL111	* B2	R116	* A1		
C138	* B2	CL112	B1	R117	* B1		
C139	* A2	CL113	A1	R118	B2		
C140	* A2	CL114	* B2	R119	B2		
C141	* A2	CL115	* B2	R120	A2		
C142	* A2	CL116	* B2	R121	B2		
C143	* B2	CL117	* B2				
C144	* B1	CL118	* A2	RB101	* B2		
C145	* A2	CL119	* A2	RB102	B2		
C146	* B1			RB103	B2		

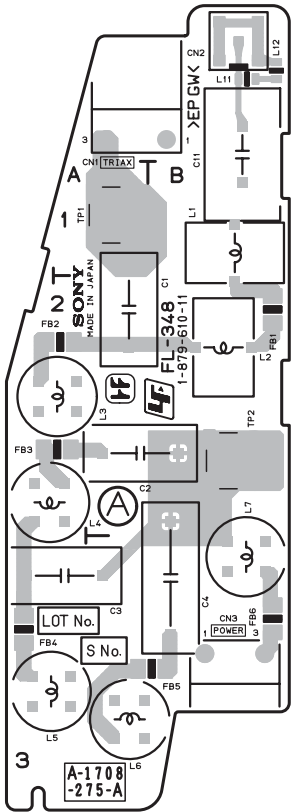

FL-348 -A SIDE-
SUFFIX: -11

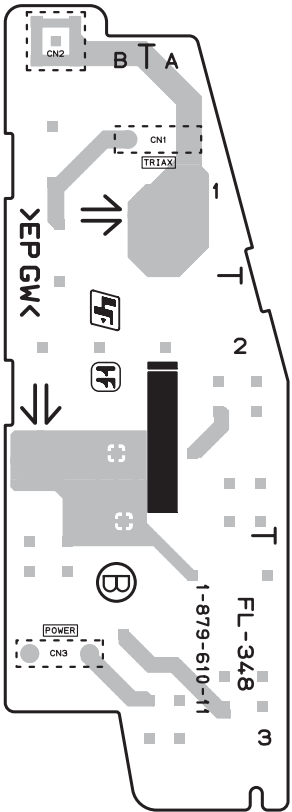

FL-348 -B SIDE-
SUFFIX: -11

FL-348 (1-879-610-11)

*:B SIDE


C1 A2
C2 A2
C3 A3
C4 B3
C11 B1

CN1 A1
CN2 B1
CN3 B3

FB1 B2
FB2 A2
FB3 A2
FB4 A3
FB5 B3
FB6 B3

L1 B1
L2 B2
L3 A2
L4 A2
L5 A3
L6 A3
L7 B3
L11 B1
L12 B1

TP1 A1
TP2 B2



LE-355 -A SIDE-
SUFFIX: -11



LE-355 -B SIDE-
SUFFIX: -11

LE-355 (1-879-614-11)

*:B SIDE

C1 B1
C2 A1

CN1 B1
CN2 A1



D1 A1
D2 A1
D3 B1
D4 B1

FB1 B1
FB2 B1
FB3 B1

JC1 A1
JC2 A1
JC3 B1
JC4 B1

R4 A1
R5 A1
R6 A1
R10 B1
R11 B1
R12 B1
R13 B1
R14 A1

S1 B1

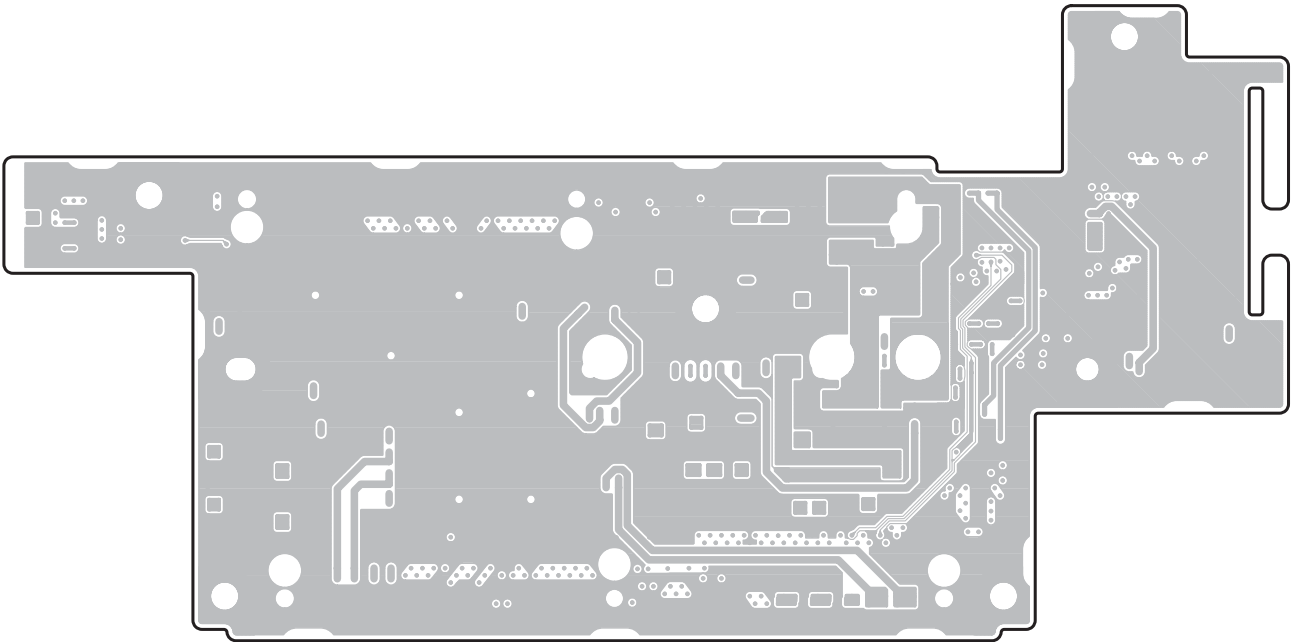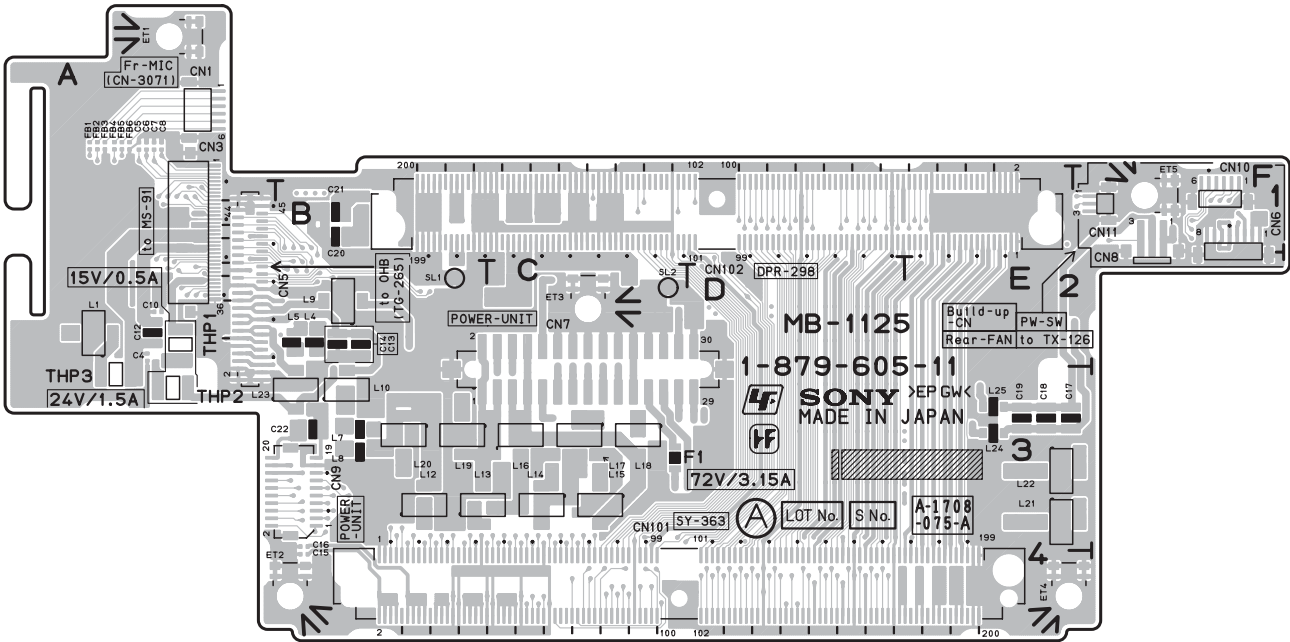


MB-1125 -A SIDE-
SUFFIX: -11

MB-1125 -B SIDE-
SUFFIX: -11


MB-1125 (1-879-605-11)

*:B SIDE

C4	A2	FB1	A1
C5	A1	FB2	A1
C6	A1	FB3	A1
C7	A1	FB4	A1
C8	A1	FB5	A1
C10	A2	FB6	A1
C12	A2		
C13	B2	L1	A2
C14	B2	L4	B2
C15	B4	L5	B2
C16	B3	L7	B3
C17	E3	L8	B3
C18	E3	L9	B2
C19	E3	L10	B3
C20	B1	L12	B3
C21	B1	L13	B3
C22	B3	L14	C3
		L15	C3
CN1	A1	L16	C3
CN3	A1	L17	C3
CN5	A2	L18	C3
CN6	F1	L19	B3
CN7	C3	L20	B3
CN8	F1	L21	E3
CN9	B3	L22	E3
CN10	F1	L23	B3
CN11	F1	L24	E3
CN101	C4	L25	E3
CN102	D1		
		SL1	B2
ET1	A1	SL2	C2
ET2	B4		
ET3	C2	THP1	A2
ET4	E4	THP2	A3
ET5	F1	THP3	A3
F1	C3		

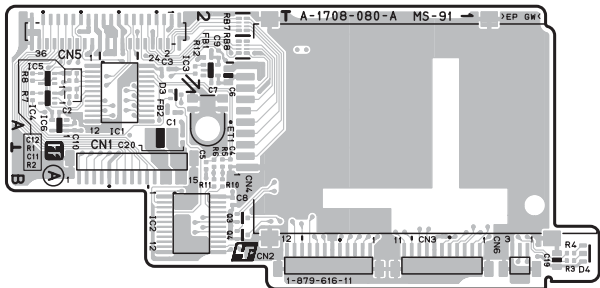

MS-91 -A SIDE-
SUFFIX: -11

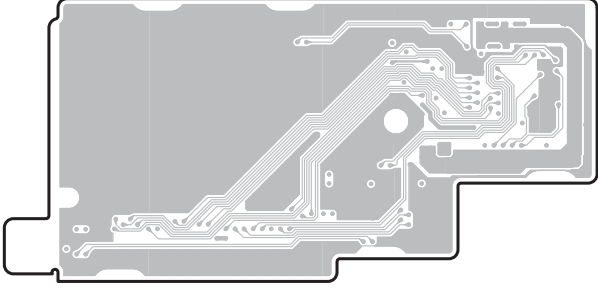


MS-91 -B SIDE-
SUFFIX: -11


MS-91 (1-879-616-11)

*:B SIDE

C1	A2	CN1	B2	IC1	A2	R6	B2
C2	A2	CN2	B1	IC2	B2	R7	A2
C3	A2	CN3	B1	IC3	A2	R8	A2
C4	B2	CN4	A1	IC4	A2	R10	B2
C5	B2	CN5	A2	IC5	A2	R11	B2
C6	A2	CN6	B1	IC6	A2	R12	A2
C7	A2						
C8	B2	D3	A2	Q3	B2	RB7	A2
C9	A2	D4	B1	Q4	B2	RB8	A2
C10	A2						
C11	A2	ET1	A2	R1	A2		
C12	A2			R2	A2		
C19	B1	FB1	A2	R3	B1		
C20	A2	FB2	A2	R4	B1		
				R5	B2		

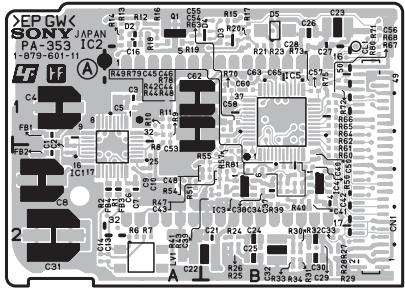

PA-353 -A SIDE-
SUFFIX: -11

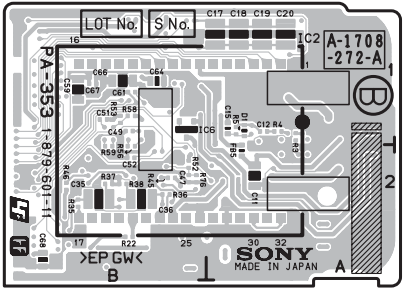


PA-353 -B SIDE-
SUFFIX: -11

PA-353 (1-879-601-11)

*:B SIDE

C1	A2	C26	B1	C51	* B1	D3	B1	R5	* A1	R30	B2	R55	B2
C2	A2	C27	B1	C52	* B2	D4	B1	R6	A2	R31	B2	R56	* B2
C3	A1	C28	B1	C53	A1	D5	B1	R7	A2	R32	B2	R57	B2
C4	A1	C29	B2	C54	B1			R8	A1	R33	B2	R58	* B1
C5	A1	C30	B2	C55	B1	FB1	A1	R9	A1	R34	B2	R59	* B2
C6	A2	C31	A2	C56	B1	FB2	A2	R10	A1	R35	* B2	R60	B2
C7	A2	C32	B2	C57	B1	FB3	A2	R11	A1	R36	* B2	R61	B2
C8	A2	C33	B2	C58	B1	FB4	A2	R12	A1	R37	* B2	R62	B1
C9	A2	C34	B2	C59	* B1	FB5	* A2	R13	A1	R38	* B2	R63	B1
C10	A2	C35	* B2	C60	B1			R14	A1	R39	B2	R64	B1
C11	* A2	C36	* B2	C61	* B1	IC1	A2	R15	B1	R40	B2	R65	B1
C12	* A1	C37	B2	C62	A1	IC2	* A1	R16	A1	R41	B2	R66	B1
C13	A2	C38	B2	C63	B1	IC3	B2	R17	B1	R42	B2	R67	B1
C14	A2	C39	B2	C64	* B1	IC4	B2	R18	A1	R43	B2	R68	B1
C15	* A1	C40	B2	C65	B1	IC5	B1	R19	A1	R44	B2	R70	B1
C16	A1	C41	B2	C66	* B1	IC6	* B1	R20	B1	R45	* B2	R71	B1
C17	* A1	C42	B2	C67	* B1			R21	B1	R46	* B2	R72	B1
C18	* A1	C43	B2	C68	* B2	LV1	A2	R22	* B2	R47	B2	R73	B1
C19	* A1	C44	B2					R23	B1	R48	B2	R75	B1
C20	* A1	C45	B2	CL1	B1	Q1	A1	R24	B2	R49	B2	R76	* B2
C21	B2	C46	B2					R25	B2	R50	B2	R78	B2
C22	B2	C47	* B2	CN1	B2	R1	A2	R26	B2	R51	A2	R79	B2
C23	B1	C48	B2			R2	A2	R27	B2	R52	* B2	R80	B1
C24	B2	C49	* B1	D1	* A1	R3	* A1	R28	B2	R53	* B1	R81	B2
C25	B2	C50	B2	D2	A1	R4	* A1	R29	B2	R54	B2		

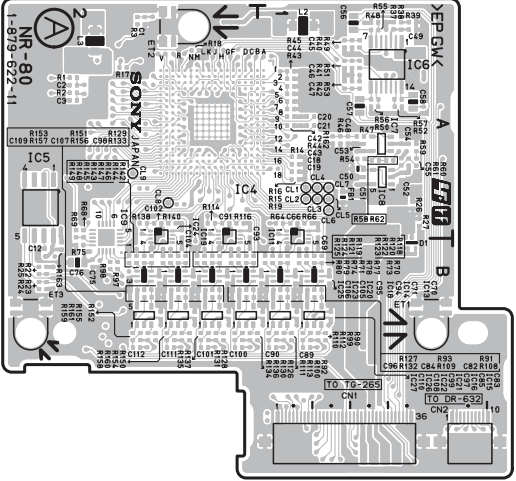


NR-80 -A SIDE-
SUFFIX: -11


NR-80 (1-879-622-11)

*:B SIDE

C1	A2	C50	A1	C97	B1	IC9	A2	R27	A1	R74	B1	R121	B2
C2	A2	C51	A1	C98	B2	IC10	* A2	R28	* A1	R75	B2	R122	B2
C3	A2	C52	A1	C99	B2	IC11	A1	R29	* A1	R76	* B2	R123	B2
C4	* A2	C53	A1	C100	B2	IC12	* A2	R30	* A1	R77	B1	R124	B2
C5	* A2	C54	A1	C101	B2	IC13	B1	R31	* A1	R78	B1	R125	B2
C8	* A2	C55	A1	C102	A2	IC14	B1	R32	* A1	R79	B1	R126	B2
C9	* A2	C56	A1	C103	* A2	IC15	B1	R33	* A1	R80	B1	R127	B2
C10	* A2	C57	A1	C104	A2	IC16	B1	R34	* A2	R81	* B1	R128	B2
C11	* A2	C58	A1	C105	B2	IC17	* B2	R35	* A1	R82	* B1	R129	B2
C12	B2	C59	* A2	C106	B2	IC18	B2	R36	* A1	R83	* B1	R130	B2
C13	* A1	C60	* A2	C107	B2	IC19	A2	R37	A1	R84	* B1	R131	B2
C14	* A1	C61	* A2	C108	B2	IC20	B2	R38	A1	R85	* B1	R132	B2
C15	* A2	C62	* A2	C109	B2	IC21	B2	R39	A1	R86	* B1	R133	B2
C16	* A2	C63	* A2	C110	B2	IC22	B2	R40	A1	R87	* B1	R134	B2
C17	* A2	C64	* A2	C111	B2	IC23	B2	R41	A1	R88	* B1	R135	B2
C18	A1	C65	* A2	C112	B2	IC24	A2	R42	A1	R89	* B1	R136	B2
C19	A1	C66	A1			IC25	B2	R43	A1	R90	B1	R137	B2
C20	A1	C67	* A1	CL1	A1	IC26	B2	R44	A1	R91	B1	R138	A2
C21	A1	C68	* A2	CL2	A1	IC27	B2	R45	A1	R92	B1	R139	* A2
C22	* A1	C69	A1	CL3	A1			R46	A1	R93	B1	R140	A2
C23	* A2	C70	B1	CL4	A1	L1	* A2	R47	A1	R94	* B1	R141	* A2
C24	* A2	C71	B1	CL5	A1	L2	A1	R48	A1	R95	* B1	R142	B2
C25	* A2	C72	* B1	CL6	A1	L3	A2	R49	A1	R96	* B1	R143	B2
C26	* A1	C73	* B1	CL7	A1			R50	A1	R97	B2	R144	B2
C27	* A2	C74	* B1	CL8	A2	R1	A2	R51	A1	R98	B2	R145	B2
C28	* A2	C75	B2	CL9	A2	R2	A2	R52	A1	R99	B1	R146	B2
C29	* A2	C76	B2			R3	A2	R53	A1	R100	B1	R147	B2
C30	* A2	C77	* A2	CN1	B1	R7	* A2	R54	A1	R101	* B1	R148	B2
C31	* A2	C78	* B2	CN2	B1	R8	* A2	R55	A1	R102	* B1	R149	B2
C32	* A2	C79	* B1			R9	* A2	R56	A1	R103	* B1	R150	B2
C33	* A1	C80	* B1	D1	B1	R10	* A2	R57	A1	R104	* B1	R151	B2
C34	* A2	C81	* B1			R11	* A2	R58	A1	R105	* B1	R152	B2
C35	* A2	C82	B1	ET1	B1	R12	* A2	R59	A1	R106	* B1	R153	B2
C36	* A2	C83	B1	ET2	A2	R13	* A2	R60	A1	R107	* B2	R154	B2
C37	* A1	C84	B1	ET3	B2	R14	A1	R61	A1	R108	B1	R155	B2
C38	* A1	C85	B1	ET4	* B1	R15	A1	R62	A1	R109	B1	R156	B2
C39	* A1	C86	* B2	ET5	* A2	R16	A1	R63	* A2	R110	B1	R157	B2
C40	* A1	C87	* B2	ET6	* B2	R17	A2	R64	A1	R111	B1	R158	B2
C41	* A1	C88	* B2			R18	A2	R65	* B1	R112	B1	R159	B2
C42	A1	C89	B1	FB1	A1	R19	A1	R66	A1	R113	B1	R160	B2
C43	A1	C90	B1			R20	* A2	R67	* A1	R114	A2	R161	B2
C44	A1	C91	A2	IC3	* A2	R21	* A2	R68	A2	R115	* B2	R162	A1
C45	A1	C92	* A2	IC4	A2	R22	B2	R69	A2	R116	A2	R163	B2
C46	A1	C93	A2	IC5	A2	R23	B2	R70	B1	R117	* A2		
C47	A1	C94	B1	IC6	A1	R24	B2	R71	B1	R118	B2		
C48	A1	C95	B2	IC7	A1	R25	B2	R72	* B2	R119	B2		
C49	A1	C96	B2	IC8	A1	R26	A1	R73	B1	R120	B2		

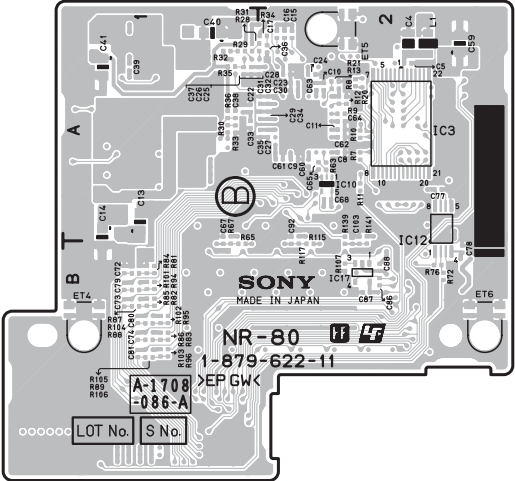

NR-80 -B SIDE-
SUFFIX: -11



SW-1402 -A SIDE-
SUFFIX: -11




SW-1402 -B SIDE-
SUFFIX: -11


SW-1402 (1-879-617-11)

*:B SIDE

C1	A1
C2	A1
CN1	A1
FB1	A1
R1	A1
R2	A1
R3	A1
R4	A1
S1	A1
S2	A1



SW-1403 -A SIDE-
SUFFIX: -11




SW-1403 -B SIDE-
SUFFIX: -11


SW-1403 (1-879-615-11)

*:B SIDE

C1	A1
C2	A1
CN1	A1
FB1	A1
R1	A1
R2	A1
R3	A1
R4	A1
S1	A1
S2	A1

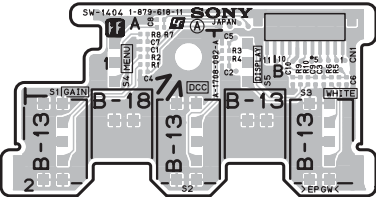

SW-1404 -A SIDE-
SUFFIX: -11

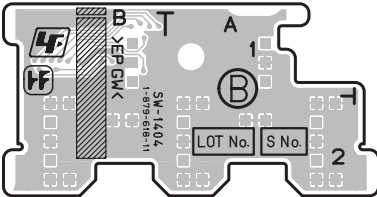


SW-1404 -B SIDE-
SUFFIX: -11


SW-1404 (1-879-618-11)

*:B SIDE

C1	A1	R1	A1
C2	B1	R2	A1
C3	B1	R3	B1
C4	A1	R4	B1
C5	B1	R5	B1
C6	B1	R6	B1
C7	A1	R7	A1
C8	A1	R8	A1
C9	B1	R9	B1
C10	B1	R10	B1
CN1	B1	S1	A2
		S2	A2
		S3	B2
		S4	A1
		S5	B1

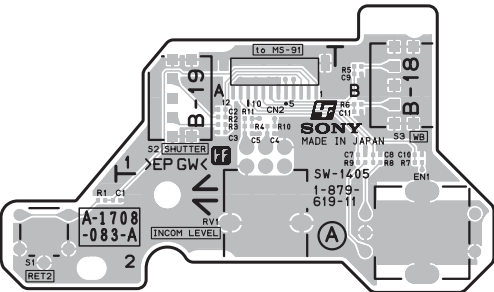

SW-1405 -A SIDE-
SUFFIX: -11

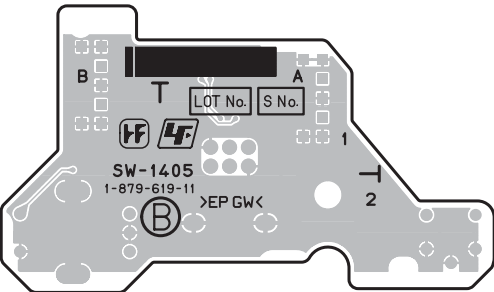


SW-1405 -B SIDE-
SUFFIX: -11


SW-1405 (1-879-619-11)

*:B SIDE

C1	A2	R2	A1
C2	A1	R3	A1
C3	A1	R4	A1
C4	A1	R5	B1
C5	A1	R6	B1
C7	B1	R7	B1
C8	B1	R8	B1
C9	B1	R9	B1
C10	B1	R10	A1
C11	B1	R11	A1
CN2	A1	RV1	A2
EN1	B2	S1	A2
R1	A2	S2	A1
		S3	B1

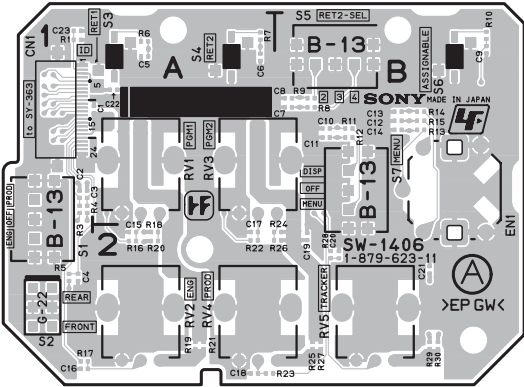

SW-1406/A -A SIDE-
SUFFIX: -11

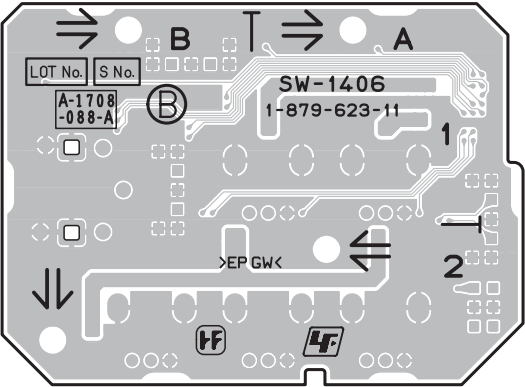


SW-1406/A -B SIDE-
SUFFIX: -11

SW-1406/A (1-879-623-11)


*:B SIDE

C1	A1	EN1	B1	R25	B2
C2	A1			R26	B2
C3	A1	R1	A1	R27	B2
C4	A2	R3	A1	R28	B2
C5	A1	R4	A1	R29	B2
C6	A1	R5	A2	R30	B2
C7	B1	R6	A1		
C8	B1	R7	A1	RV1	A1
C9	B1	R8	B1	RV2	A2
C10	B1	R9	B1	RV3	A1
C11	B1	R10	B1	RV4	A2
C12	B1	R11	B1	RV5	B2
C13	B1	R12	B1		
C14	B1	R13	B1	S1	A1
C15	A2	R14	B1	S2	A2
C16	A2	R15	B1	S3	A1
C17	A2	R16	A2	S4	A1
C18	A2	R17	A2	S5	B1
C19	B2	R18	A2	S6	B1
C20	B2	R19	A2	S7	B1
C21	B2	R20	A2		
C22	A1	R21	A2		
C23	A1	R22	A2		
		R23	A2		
CN1	A1	R24	B2		

SW-1406: UC, J
SW-1406A: CE



SW-1407 -A SIDE-
SUFFIX: -11




SW-1407 -B SIDE-
SUFFIX: -11


SW-1407 (1-879-620-11)

*:B SIDE


C1	A1
C2	A1
C3	A1
C4	A1
C5	A1
C6	A1
CN1	A1
D1	A1
D2	A1
R1	A1
R2	A1
R3	A1
R4	A1
R5	A1
S1	A1

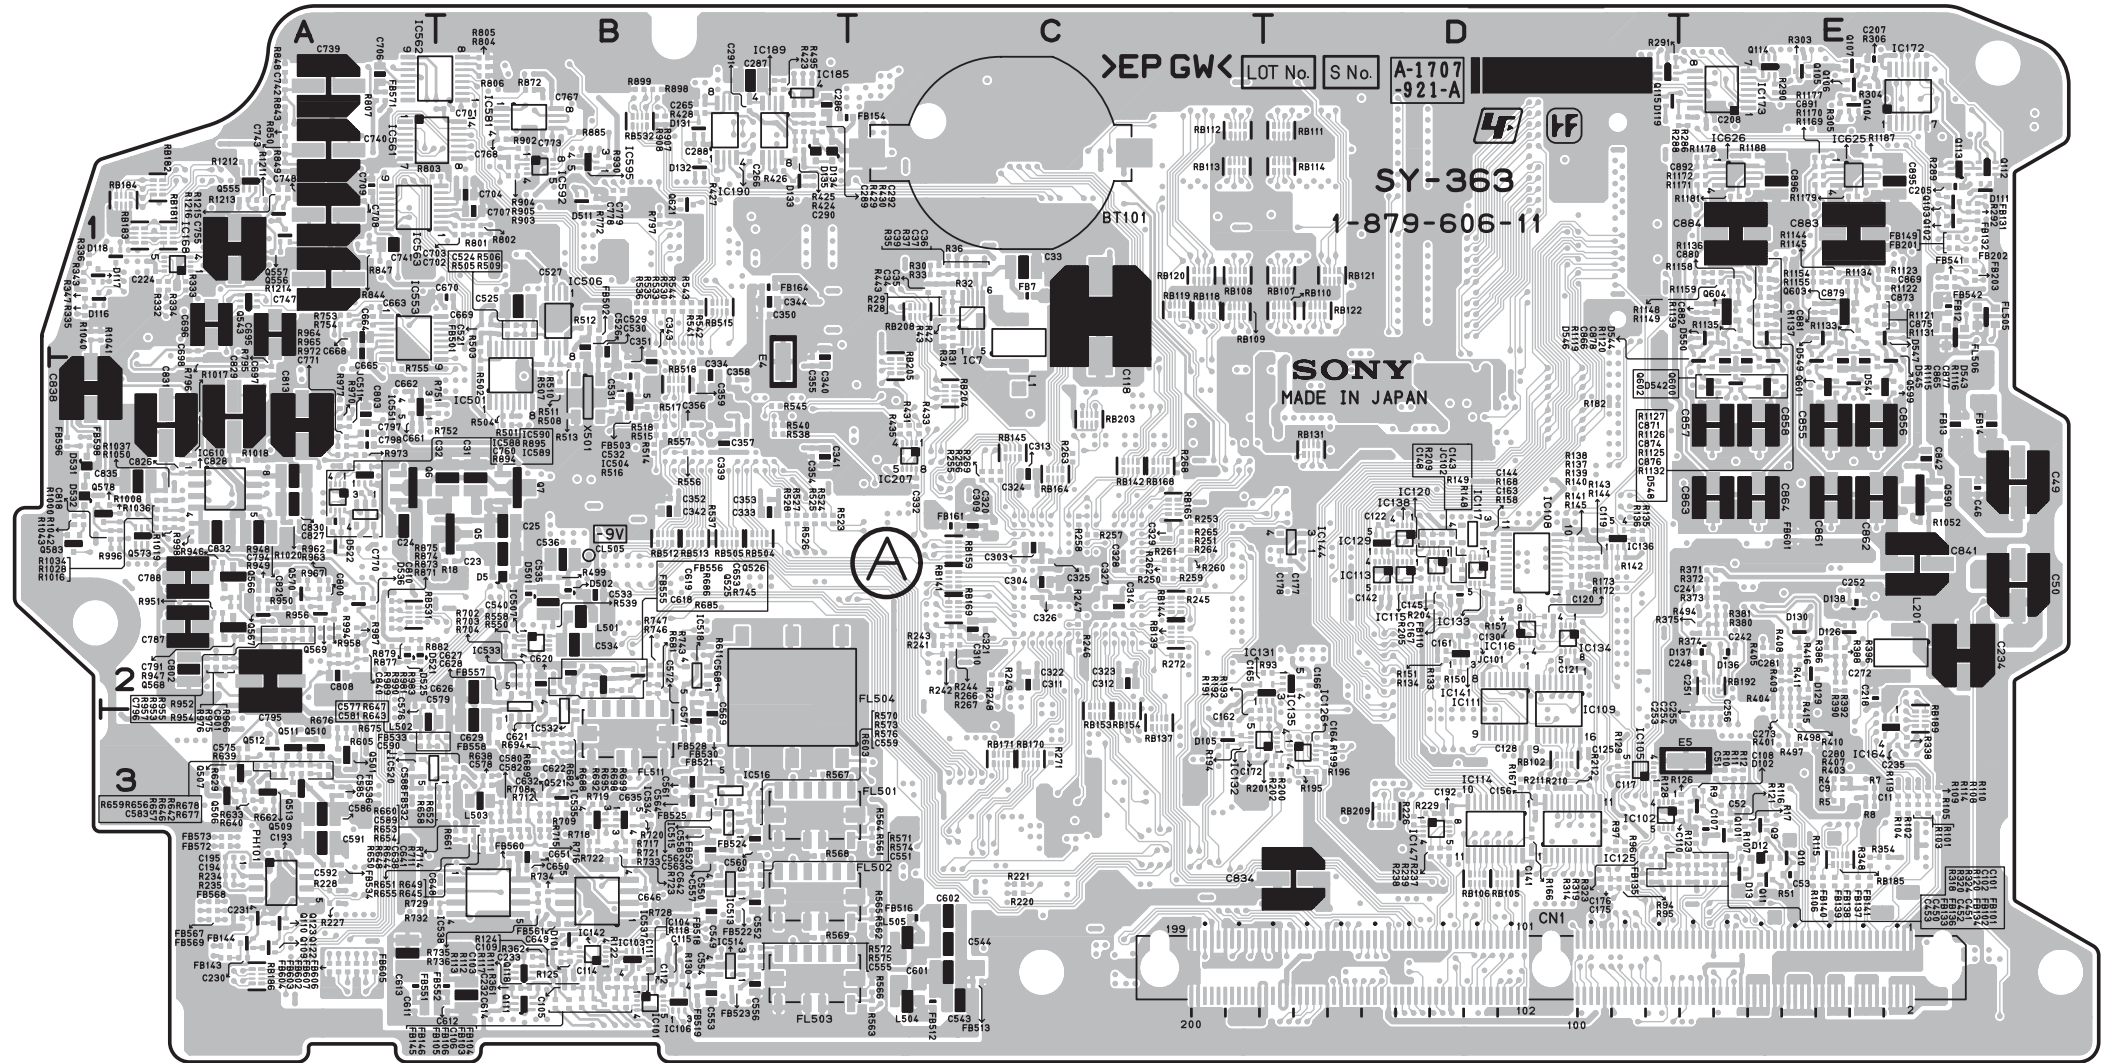

SY-363 -A SIDE-SUFFIX: -11

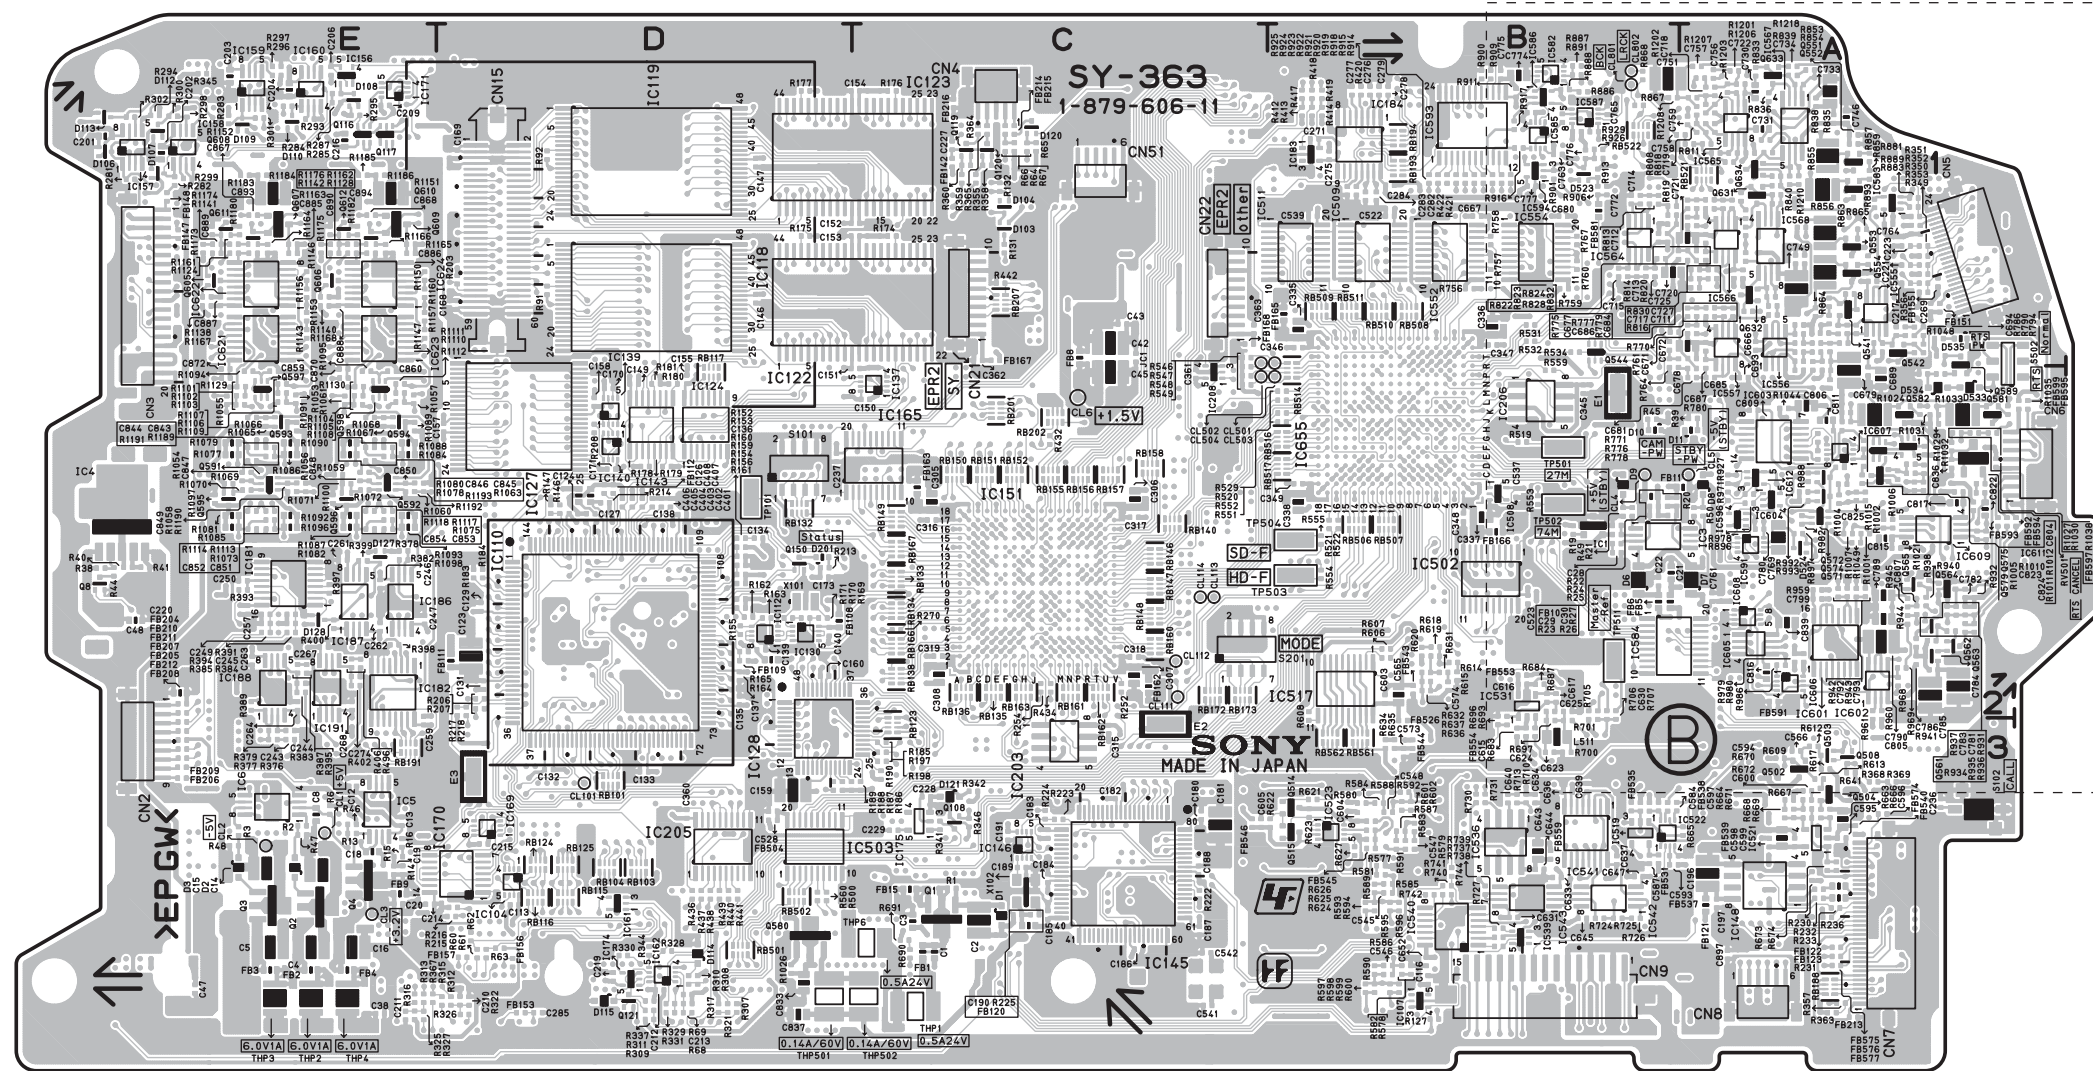

SY-363 -B SIDE-
SUFFIX: -11

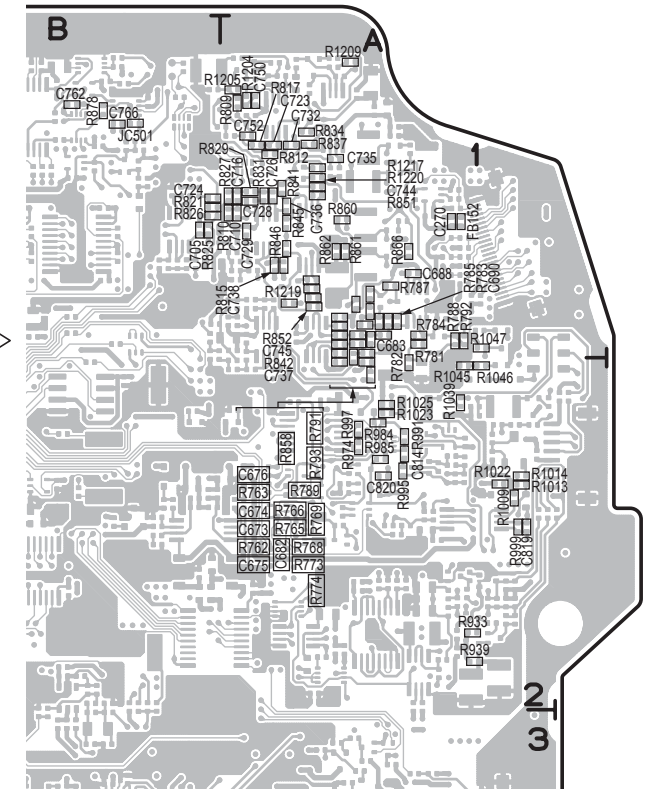


SY-363 (1-879-606-11)


*:B SIDE

BT101	C1	C146	*D1	C248	E2	C353	B2	C592	A3	C697	A2	C792	*A2	C884	E1	D136	E2	FB161	C2	FB603	A3	IC187	*E2	IC626	E1	Q569	A2	R49	*B2	R172	D2	R265	C2	
		C147	*D1	C249	*E2	C354	B2	C593	*B3	C698	A1	C793	*A2	C885	*E1	D137	E2	FB162	*C2	FB604	A3	IC188	*E2	IC655	*B2	Q570	A2	R50	*A2	R173	D2	R266	C2	
C1	*C3	C148	D2	C250	*E2	C355	B2	C594	*A3	C701	B1	C794	A2	C886	*E1	D138	E2	FB163	*C2	FB605	A3	IC189	B1			Q571	*A2	R51	E3	R174	*C1	R267	C2	
C2	*C3	C149	*D2	C251	E2	C356	B2	C595	*A3	C702	B1	C795	A2	C887	*E1	D201	*D2	FB164	B1	FB606	A3	IC190	B1	JC1	*C1	Q572	*A2	R60	*D3	R175	*D1	R268	C2	
C3	*C3	C150	*C2	C252	E2	C357	B2	C596	*A3	C703	B1	C796	A2	C888	*E1	D501	B2	FB165	*B1	FB607	A3	IC191	*E2	JC101	D2	Q573	A2	R61	*D3	R176	*C1	R269	C2	
C4	*E3	C151	*C2	C253	E3	C358	B2	C597	*B3	C704	B1	C797	A2	C889	*E1	D502	B2	FB166	*B2			IC203	*C3	JC102	D2	Q574	*A2	R62	*D3	R177	*D1	R270	*C2	
C5	*E3	C152	*C1	C254	E3	C359	B2	C598	*A3	C705	*B1	C798	A2	C890	*E1	D511	B1	FB167	*C1		FL501	B3	IC205	*D3	JC501	*B1	Q575	*A2	R63	*D3	R178	*D2	R271	C3
C8	*E3	C153	*C1	C255	E3	C360	*D3	C599	*A3	C706	A1	C799	*A2	C891	E1	D521	A2	FB168	*C1		FL502	B3	IC206	*B2	JC511	A2	Q578	A2	R64	*C1	R179	*D2	R272	C2
C9	E3	C154	*C1	C256	E3	C361	*C2	C600	*A3	C707	B1	C800	A2	C892	E1	D522	A2	FB201	E1		FL503	B3	IC207	*C2			Q579	*A2	R65	*C1	R180	*D2	R281	*E1
C11	E3	C155	*D2	C257	*E2	C362	*C1	C601	C3	C708	A1	C801	A2	C893	*E1	D523	*B1	FB202	E1		FL504	B2	IC208	*C2	L1	C1	Q580	*D3	R66	*C1	R181	*D2	R282	*E1
C12	*E3	C156	D3	C259	*E3	C363	*C1	C602	C3	C709	A1	C802	A2	C894	*E1	D524	*A2	FB203	E1		FL505	E1	IC501	B2	L201	E2	Q581	*A2	R67	*C1	R182	D2	R283	*E1
C13	*E3	C157	*D2	C261	*E2	C401	*D2	C603	*B2	C710	*A1	C803	A2	C895	E1	D525	A2	FB204	*E2		FL506	E1	IC502	*B2	L501	B2	Q582	*A2	R68	*D3	R183	*D2	R284	*E1
C14	*E3	C158	*D2	C262	*E2	C402	*D2	C604	*B3	C711	*A1	C804	*A2	C896	E1	D531	A2	FB205	*E3		FL511	B3	IC503	*D3	L502	A3	Q583	A2	R69	*D3	R184	*D2	R285	*E1
C15	*E3	C159	*D3	C263	*E2	C403	*D2	C605	*C3	C712	*B1	C805	*A2	C897	*A3	D532	A2	FB206	*E3				IC504	B2	L503	B3	Q589	*A1	R91	*D1	R185	*C3	R286	E1
C16	*E3	C160	*D2	C264	*E2	C404	*D2	C611	A3	C713	*B1	C806	*A2			D533	*A2	FB207	*E3	IC1	*B2	IC506	B1	L504	C3	Q590	E2	R92	*D1	R186	*C3	R287	*E1	
C18	*E3	C161	D2	C265	B1	C405	*D2	C612	B3	C714	*B1	C807	*A2	CL1	*E3	D534	*A2	FB208	*E3	IC3	*B2	IC507	B2	L505	C3	Q591	*E2	R93	D2	R187	*D3	R288	D1	
C19	*E3	C162	C3	C266	B1	C406	*D2	C613	A3	C715	*B1	C808	A2	CL2	*E3	D535	*A1	FB209	*E3	IC4	*E2	IC508	*B2	L511	*B3	Q592	*E2	R94	D3	R188	*D3	R289	E1	
C20	*E3	C163	D2	C267	*E2	C407	*D2	C614	B3	C716	*A1	C809	*A2	CL3	*E3	D536	A2	FB210	*E2	IC5	*E3	IC509	*B1			Q593	*E2	R95	D3	R189	*D3	R290	E1	
C21	*B2	C164	D3	C268	*E2	C408	*D2	C615	*B3	C717	*A1	C810	A2	CL4	*B2	D541	E2	FB211	*E3	IC6	*E3	IC511	*B1	PH101	A3	Q594	*E2	R96	D3	R190	*C3	R291	D1	
C22	*B2	C165	C2	C269	*A1	C450	D3	C616	*B2	C718	*A1	C811	*A2	CL5	*A2	D542	E2	FB212	*E3	IC7	C1	IC513	B3			Q595	*E2	R97	D3	R191	C3	R292	E1	
C23	B2	C166	D2	C270	*A1	C451	E3	C617	*B2	C719	*A1	C813	A2	CL6	*C2	D543	E2	FB213	*A3	IC101	B3	IC514	B3	Q1	*C3	Q596	*E2	R101	E3	R192	C3	R293	*E1	
C24	A2	C167	D2	C271	*B1	C452	E3	C618	B2	C720	*B1	C814	*A2	CL101	*D3	D544	E2	FB214	*C1	IC102	D3	IC515	B3	Q2	*E3	Q597	*E2	R102	E3	R193	D3	R294	*E1	
C25	B2	C168	*D1	C272	E2	C453	D3	C619	B2	C721	*A1	C815	*A2	CL111	*C2	D545	E2	FB215	*C1	IC103	B3	IC516	B3	Q3	*E3	Q598	*E2	R103	E3	R194	C3	R295	*E1	
C28	*B2	C169	*D1	C273	E2	C521	B1	C620	B2	C722	*A1	C816	*A2	CL112	*C2	D546	E2	FB216	*C1	IC104	*D3	IC517	*B2	Q4	*E3	Q599	E2	R104	E3	R195	D3	R296	*E1	
C29	*B2	C170	*D2	C274	*E2	C522	*B1	C621	B3	C723	*A1	C817	*A2	CL113	*C2	D547	E1	FB501	B1	IC105	D3	IC518	B2	Q5	B2	Q600	E2	R105	E3	R196	D3	R297	*E1	
C30	*B2	C171	*D2	C275	*B1	C523	*B2	C622	B3	C724	*B1	C818	A2	CL114	*C2	D548	E1	FB502	B1	IC106	B3	IC519	*B3	Q6	A2	Q601	E2	R106	E3	R197	*C3	R298	*E1	
C31	B2	C172	C3	C276	*B1	C524	B1	C623	*B3	C725	*B1	C819	*A2	CL501	*B1	D549	E1	FB503	B2	IC107	*B3	IC520	A3	Q7	B2	Q602	E2	R107	E3	R198	*C3	R299	*E1	
C32	B2	C173	*D2	C277	*B1	C525	B1	C624	*B3	C726	*A1	C820	*A2	CL502	*C1	D550	E1	FB504	*D3	IC108	D2	IC521	*A3	Q8	*E2	Q603	E1	R108	E3	R199	D3	R300	*E1	
C33	C1	C175	D3	C278	*B1	C526	B1	C625	*B2	C727	*A1	C821	A2	CL503	*B2			FB512	C3	IC109	D3	IC522	*B3	Q9	E3	Q604	E1	R109	E3	R200	D3	R301	*E1	
C34	C1	C176	D3	C279	*B1	C527	B1	C626	B2	C728	*A1	C822	*A2	CL504	*C2	E1	*B2	FB513	C3	IC110	*D2	IC523	*B3	Q10	E3	Q605	*E1	R110	E3	R201	D3	R302	*E1	
C35	C1	C177	D2	C280	E2	C528	*D3	C627	B2	C729	*A1	C823	*A2	CL505	B2	E2	*C3	FB516	C3	IC111	D2	IC531	*B2	Q11	E3	Q606	*E1	R111	B3	R202	D3	R303	E1	
C36	C1	C178	D2	C281	E2	C529	B1	C628	B3	C730	*A1	C824	*A2	CL801	*B1	E3	*D3	FB518	B3	IC112	*D2	IC532	B3	Q101	E3	Q607	*E1	R112	B3	R203	*D1	R304	E1	
C37	C1	C180	*C3	C282	*B1	C530	B2	C629	B3	C731	*A1	C825	*A2	CL114	*C2	E4	B2	FB519	B3	IC113	D2	IC533	B2	Q102	E1	Q608	*E1	R113	B3	R204	D2	R305	E1	
C38	*E3	C181	*C3	C283	*B1	C531	B2	C630	*B2	C732	*A1	C826	A2	CL802	*B1	E5	E3	FB520	B3	IC114	D3	IC534	B3	Q103	E1	Q609	*E1	R114	E3	R205	D2	R306	E1	
C39	C1	C182	*C3	C284	*B1	C532	B2	C631	*B3	C733	*A1	C827	A2	CN1	D3			FB521	B3	IC115	D2	IC535	B3	Q104	E1	Q610	*E1	R115	E3	R206	*D2	R307	*D3	
C42	*C1	C183	*C3	C285	*D3	C533	B2	C632	B3	C734	*A1	C828	A2	CN2	*E3	FB1	*C3	FB522	B3	IC116	D2	IC536	*B3	Q105	E1	Q611	*E1	R116	E3	R207	*D2	R308	*D3	
C43	*C1	C184	*C3	C286	B1	C534	B2	C633	*B3	C735	*A1	C829	A2	CN3	*E1	FB2	*E3	FB523	B3	IC117	D2	IC537	B3	Q106	E1	Q612	*E1	R117	B3	R208	*D2	R309	*D3	
C45	*C2	C185	*C3	C287	B1	C535	B2	C634	*B3	C736	*A1	C830	A2	CN4	*C1	FB3	*E3	FB524	B3	IC118	*D1	IC538	B3	Q107	E1	Q621	B1	R118	B3	R209	D2	R310	*D3	
C46	E2	C186	*C3	C288	B1	C536	B2	C635	B3	C737	*A1	C831	A2	CN5	*A1	FB4	*E3	FB525	B3	IC119	*D1	IC539	*B3	Q108	*C3	Q631	*A1	R119	E3	R210	D3	R311	*D3	
C47	*E3	C187	*C3	C289	B1	C537	*B2	C636	*B3	C738	*A1	C832	A2	CN6	*A2	FB5	*B2	FB526	*B3	IC120	D2	IC540	*B3	Q109	A3	Q632	*A1	R120	E3	R211	D3	R312	*D3	
C48	*E2	C188	*C3	C290	B1	C539	*B1	C637	*B3	C739	A1	C833	*D3	CN7	*A3	FB6	*B2	FB528	B3	IC122	*C1	IC541	*B3	Q110	A3	Q633	*A1	R121	E3	R212	D3	R313	*E3	
C49	E2	C189	*C3	C291	B1	C540	B2	C638	B3	C740	A1	C834	D3	CN8	*A3	FB7	C1	FB530	B3	IC123	*C1	IC542	*B3	Q111	B3	Q634	*A1	R122	B3	R213	*D2	R314	D3	
C50	E2	C190	*C3	C292	B1	C541	*C3	C639	*B3	C741	A1	C835	A2	CN9	*B3	FB8	*C1	FB531	*B3	IC124	*D2	IC543	*B3	Q112	E1			R123	E3	R214	*D2	R315	*D3	
C51	E3	C191	*C3	C303	C2	C542	*C3	C640	*B3	C742	A1	C836	*A2	CN15	*D1	FB9	*E3	FB532	A3	IC125	D3	IC551	A2	Q113	E1	R1	*C3	R124	B3	R215	*D3	R316	*E3	
C52	E3	C192	D3	C304	C2	C543	C3	C641	B3	C743	A1	C837	*D3	CN21	*C1	FB10	*B2	FB533	B3	IC126	D3	IC552	*B1	Q114	E1	R2	*E3	R125	B3	R216	*D3	R317	*D3	
C53	E3	C193	A3	C305	*C2	C544	C3	C642	B3	C744	*A1	C838	A2	CN22	*C1	FB11	*A2	FB534	A3	IC127	*D2	IC553	A1	Q115	D1	R3	*E3	R126	E3	R217	*D2	R318	D3	
C101	E3	C194	A3	C306	*C2	C545	*B3	C643	*B3	C745	*A1	C839	*A2	CN51	*C1	FB12	E1	FB535	*B3	IC128	*D3	IC554	*B1	Q116	*E1	R4	E3	R127	*B3	R218	*D2	R319	D3	
C102	E3	C195	A3	C307	*C2	C546	*B3	C644	*B3	C746	*A1	C840	A2			FB13	E2	FB536	A3	IC129	D2	IC555	*A1	Q117	*E1	R5	E3	R128	D3	R220	C3	R320	E3	
C103	B3	C196	*A3	C308	*C2	C547	*B3	C645	*B3	C747	A1	C841	E2	D1	*C3	FB14	E2	FB537	*B3															

R367	*E3	R509	B1	R600	*B3	R698	B3	R792	*A1	R893	*A1	R987	A2	R1085	*E2	R1177	E1	RB160	*C2
R368	*A3	R510	B2	R601	*B3	R699	B3	R793	*A1	R894	A2	R988	*A2	R1086	*E2	R1178	E1	RB161	*C2
R369	*A3	R511	B2	R602	*B3	R700	*B3	R794	*A1	R895	A2	R989	A2	R1087	*E2	R1179	E1	RB162	*C2
R371	E2	R512	B1	R603	C3	R701	*B3	R795	A2	R896	*A2	R990	A2	R1088	*E2	R1180	*E1	RB163	*C2
R372	E2	R513	B2	R605	A3	R702	B2	R796	A1	R897	*A2	R991	*A2	R1089	*E2	R1181	E1	RB164	C2
R373	E2	R514	B2	R606	*B2	R703	B2	R797	B1	R898	B1	R992	*A2	R1090	*E2	R1182	*E1	RB165	C2
R374	E2	R515	B2	R607	*B2	R704	B2	R801	B1	R899	B1	R993	*A2	R1091	*E2	R1183	*E1	RB166	*C2
R375	E2	R516	B2	R608	*B2	R705	*B2	R802	B1	R900	*B1	R994	A2	R1092	*E2	R1184	*E1	RB167	*C2
R376	*E3	R517	B2	R609	*A3	R706	*B2	R803	B1	R901	*B1	R995	*A2	R1093	*E2	R1185	*E1	RB168	C2
R377	*E3	R518	B2	R611	B2	R707	*B2	R804	B1	R902	B1	R996	A2	R1094	*E2	R1186	*E1	RB169	C2
R378	*E2	R519	*B2	R612	*A3	R708	B3	R805	B1	R903	B1	R997	*A2	R1095	*E2	R1187	E1	RB170	C3
R379	*E3	R520	*B2	R613	*A3	R709	B3	R806	B1	R904	B1	R998	A2	R1096	*E2	R1188	E1	RB171	C3
R380	E2	R521	*B2	R614	*B2	R710	*B3	R807	A1	R905	B1	R999	*A2	R1097	*E2	R1189	*E2	RB172	*C2
R381	E2	R522	*B2	R615	*B2	R711	B3	R808	*A1	R906	*B1	R1000	A2	R1098	*E2	R1190	*E2	RB173	*C2
R382	*E2	R523	B2	R617	*A3	R712	B3	R809	*A1	R907	B1	R1001	*A2	R1100	*E2	R1191	*E2	RB181	A1
R383	*E2	R524	B2	R618	*B2	R713	*B3	R810	*A1	R908	B1	R1002	*A2	R1101	*E2	R1192	*E2	RB182	A1
R384	*E2	R525	B2	R619	*B2	R714	B3	R811	*A1	R909	*B1	R1004	*A2	R1102	*E2	R1193	*E2	RB183	A1
R385	*E2	R526	B2	R620	*B2	R715	B3	R812	*A1	R911	*B1	R1005	*A2	R1103	*E2	R1201	*A1	RB184	A1
R386	E2	R527	B2	R621	*B3	R716	B3	R813	*B1	R913	*B1	R1006	*A2	R1104	*E2	R1202	*A1	RB185	E3
R387	*E2	R528	B2	R622	*B3	R717	B3	R814	*B1	R914	*B1	R1007	*A2	R1105	*E2	R1203	*A1	RB186	A3
R388	E2	R529	*B2	R623	*B3	R718	B3	R815	*A1	R915	*B1	R1008	A2	R1106	*E2	R1204	*A1	RB188	*A3
R389	*E2	R530	B1	R624	*B3	R719	B3	R816	*A1	R916	*B1	R1009	*A2	R1107	*E2	R1205	*A1	RB189	E3
R390	E2	R531	*B1	R625	*B3	R720	B3	R817	*A1	R917	*B1	R1010	*A2	R1108	*E2	R1206	*A1	RB191	*E3
R391	*E2	R532	*B1	R626	*B3	R721	B3	R818	*A1	R918	*B1	R1011	*A2	R1109	*E2	R1207	*A1	RB192	E2
R392	E2	R533	B1	R627	*B3	R722	B3	R819	*B1	R919	*B1	R1012	*A2	R1110	*E2	R1208	*B1	RB193	*B1
R393	*E2	R534	*B1	R629	A3	R723	B3	R820	*B1	R920	*B1	R1013	*A2	R1111	*E2	R1209	*A1	RB194	*B1
R394	*E2	R535	B1	R631	*B2	R724	*B3	R821	*B1	R921	*B1	R1014	*A2	R1112	*E2	R1210	*A1	RB201	*C2
R395	*E2	R536	B1	R632	*B2	R725	*B3	R822	*B1	R922	*B1	R1015	*A2	R1113	*E2	R1211	A1	RB202	*C2
R396	E2	R537	B2	R633	A3	R726	*B3	R823	*B1	R923	*B1	R1016	A2	R1114	*E2	R1212	A1	RB203	C2
R397	*E2	R538	B2	R634	*B3	R727	*B3	R824	*A1	R924	*B1	R1017	A2	R1115	E2	R1213	A1	RB204	C2
R398	*E2	R539	B2	R635	*B3	R728	B3	R825	*B1	R925	*B1	R1018	A2	R1116	E2	R1214	A1	RB205	C2
R399	*E2	R540	B2	R636	*B2	R729	A3	R826	*B1	R926	*B1	R1019	A2	R1117	*E2	R1215	A1	RB207	*C1
R400	*E2	R541	B1	R637	*B2	R730	*B3	R827	*A1	R927	*A2	R1020	A2	R1118	*E2	R1216	A1	RB208	C1
R401	E3	R542	B1	R638	B3	R731	*B3	R828	*A1	R929	*B1	R1021	*A2	R1119	E2	R1217	*A1	RB209	D3
R402	*E2	R543	B1	R639	A3	R732	A3	R829	*A1	R930	B1	R1022	*A2	R1120	E2	R1218	*A1	RB501	*D3
R403	E3	R544	B1	R640	A3	R733	B3	R830	*A1	R931	*A2	R1023	*A2	R1121	E1	R1219	*A1	RB502	*D3
R404	E2	R545	B2	R641	*A3	R734	B3	R831	*A1	R932	*A2	R1024	*A2	R1122	E1	R1220	*A1	RB504	B2
R405	E2	R546	*C1	R642	A3	R735	B3	R832	*A1	R933	*A2	R1025	*A2	R1123	E1			RB505	B2
R406	*E2	R547	*C2	R643	B3	R736	B3	R833	*A1	R934	*A2	R1026	*D3	R1124	*E1	RB101	*D3	RB506	*B2
R407	E3	R548	*C2	R644	B3	R737	*B3	R834	*A1	R935	*A2	R1027	*A2	R1125	E1	RB102	D3	RB507	*B2
R408	E2	R549	*C2	R645	B3	R738	*B3	R835	*A1	R936	*A2	R1028	A2	R1126	E1	RB103	*D3	RB508	*B1
R409	E2	R550	B2	R646	A3	R739	*B3	R836	*A1	R937	*A2	R1029	*A2	R1127	E1	RB104	*D3	RB509	*B1
R410	E2	R551	*B2	R647	B3	R740	*B3	R837	*A1	R938	*A2	R1030	*A2	R1128	*E1	RB105	D3	RB510	*B1
R411	E2	R552	*B2	R648	B3	R741	*B3	R838	*A1	R939	*A2	R1031	*A2	R1129	*E2	RB106	D3	RB511	*B1
R412	*B1	R553	*B2	R649	B3	R742	*B3	R839	*A1	R940	*A2	R1032	*A2	R1130	*E2	RB107	D1	RB512	B2
R413	*B1	R554	*B2	R650	B3	R743	B2	R840	*A1	R941	*A2	R1033	*A2	R1131	E1	RB108	C1	RB513	B2
R414	*B1	R555	*B2	R651	B3	R744	*B3	R841	*A1	R942	*A2	R1034	A2	R1132	E1	RB109	C1	RB514	*B2
R415	E2	R556	B2	R652	A3	R745	B2	R842	*A1	R943	*A2	R1035	*A2	R1133	E1	RB110	D1	RB515	B1
R416	E2	R557	B2	R653	B3	R746	B2	R843	A1	R944	*A2	R1036	A2	R1134	E1	RB111	D1	RB516	*B2
R417	*B1	R558	B2	R654	B3	R747	B2	R844	A1	R945	*A2	R1037	A2	R1135	E1	RB112	C1	RB517	*B2
R418	*B1	R559	*B2	R655	B3	R751	B2	R845	*A1	R946	A2	R1038	*A2	R1136	E1	RB113	C1	RB518	B2
R419	*B1	R560	*D3	R656	A3	R752	A2	R846	*A1	R947	A2	R1039	*A2	R1137	E1	RB114	D1	RB521	*A1
R420	*B1	R561	C3	R657	A3	R753	A1	R847	A1	R948	A2	R1040	A1	R1138	*E1	RB115	*D3	RB522	*B1
R421	*B1	R562	C3	R658	A3	R754	A1	R848	A1	R949	A2	R1041	A1	R1139	E1	RB116	*D3	RB531	A2
R422	*B1	R563	C3	R659	A3	R755	A2	R849	A1	R950	A2	R1042	A2	R1140	*E1	RB117	*D2	RB532	B1
R423	B1	R564	C3	R660	B3	R756	*B1	R850	A1	R951	A2	R1043	A2	R1141	*E1	RB118	C1	RB561	*B3
R424	B1	R565	C3	R661	B3	R757	*B1	R851	*A1	R952	A2	R1044	*A2	R1142	*E1	RB119	C1	RB562	*B3
R425	B1	R566	C3	R662	A3	R758	*B1	R852	*A1	R953	A2	R1045	*A2	R1143	*E1	RB120	C1		
R426	B1	R567	B3	R663	*A3	R759	*B1	R853	*A1	R954	A2	R1046	*A2	R1144	E1	RB121	D1	RV501	*A2
R427	B1	R568	B3	R664	*B3	R760	*B1	R854	*A1	R955	A2	R1047	*A1	R1145	E1	RB122	D1		
R428	B1	R569	B3	R665	*A3	R761	*A1	R855	*A1	R956	A2	R1048	*A1	R1146	*E1	RB123	*C3	S101	*D2
R429	B1	R570	B3	R666	*A3	R762	*A1	R856	*A1	R957	A2	R1049	*A2	R1147	*E1	RB124	*D3	S102	*A3
R430	B1	R571	B3	R667	*A3	R763	*A1	R857	*A1	R958	A2	R1050	A2	R1148	E1	RB125	*D3	S201	*C2
R431	C2	R572	B3	R668	*A3	R764	*B1	R858	*A1	R959	*A2	R1052	E2	R1149	E1	RB131	D2	S502	*A1
R432	*C2	R573	B3	R669	*A3	R765	*A1	R859	*A1	R960	*A2	R1053	*E2	R1150	*E1	RB132	*D2		
R433	C2	R574	B3	R670	*A3	R766	*A1	R860	*A1	R961	*A2	R1054	*E2	R1151	*E1	RB133	*C2	THP1	*C3
R434	*C2	R575	B3	R671	*B3	R767	*B1	R861	*A1	R962	A2	R1055	*E2	R1152	*E1	RB134	*C2	THP2	*E3
R435	C2	R576	B3	R672	*A3	R768	*A1	R862	*A1	R963	A2	R1056	*E2	R1153	*E1	RB135	*C2	THP3	*E3
R436	*D3	R577	*B3	R673	*A3	R769	*A1	R863	*A1	R964	A2	R1057	*E2	R1154	E1	RB136	*C2	THP4	*E3
R437	*D3	R578	*B3	R674	*A3	R770	*B1	R864	*A1	R965	A2	R1058	*E2	R1155	E1	RB137	C3	THP6	*C3
R438	*D3	R579	*B3	R675	A3	R771	*A1	R865	*A1	R966	A2	R1059	*E2	R1156	*E1	RB138	*C2	THP501	*D3
R439	*D3	R580	*B3	R676	A3	R772	B1	R866	*A1	R967	A2	R1060	*E2	R1157	*E1	RB139	C2	THP502	*C3
R440	*D3	R581	*B3	R677	A3	R773	*A2	R867	*B1	R968	*A2	R1061	*E2	R1158	E1	RB140	*C2		
R441	*D3	R582	*B3	R678	A3	R774	*A2	R868	*B1	R969	*A2	R1063	*E2	R1159	E1	RB141	C2	TP101	*D2
R442	*C1	R583	*B3	R681	B2	R775	*A1	R871	A2	R970	A2	R1065	*E2	R1160	*E1	RB142	C2	TP501	*B2
R443	C1	R584	*B3	R682	B3	R776	*A2	R872	B1	R971	*A2	R1066	*E2	R1161	*E1	RB144	C2	TP502	*B2
R494	E2	R585	*B3	R683	*B3	R777	*A1	R873	A2	R972	A2	R1067	*E2	R1162	*E1	RB145	C2	TP503	*B2
R495	B1	R586	*B3	R684	*B2	R778	*A2	R874	A2	R973	A2	R1068	*E2	R1163	*E1	RB146	*C2	TP504	*B2
R496	*E2	R587	*B3	R685	B2	R779	*A1	R875	A2	R974	*A2	R1069	*E2	R1164	*E1	RB147	*C2	TP511	*B2
R497	E3	R588	*B3	R686	B2	R780	*A1	R877	A2	R975	A2	R1070	*E2	R1165	*E1	RB148	*C2		
R498	E3	R589	*B3	R687															

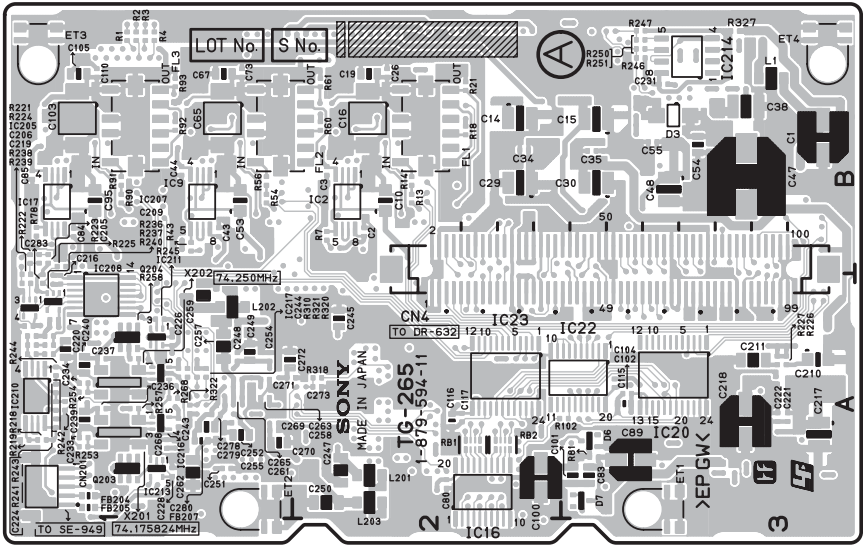

TG-265 -A SIDE-
SUFFIX: -11

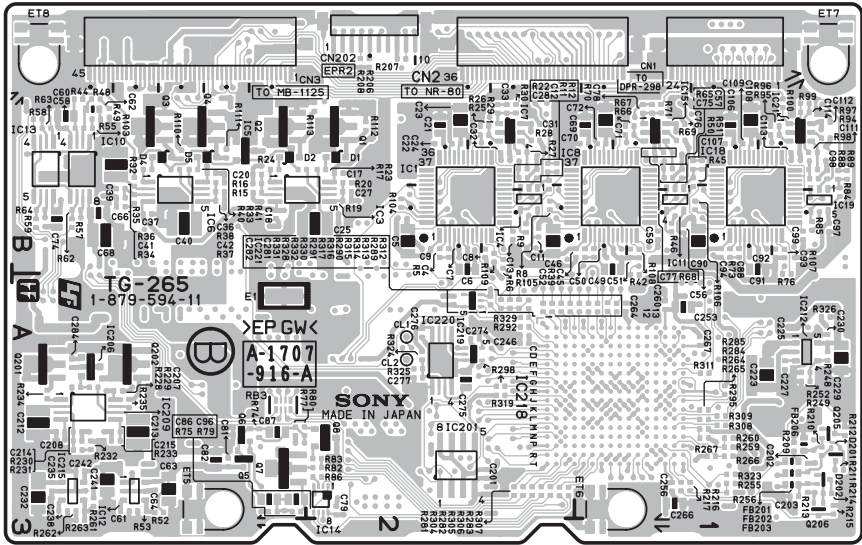


TG-265 -B SIDE-
SUFFIX: -11


TG-265 (1-879-594-11)

*:B SIDE

C1	B3	C57	* B1	C113	* B1	C253	* A1	ET2	A1	IC217	A1	R33	* B3	R92	B1	R242	A1	R322	A1
C2	B2	C58	* B3	C114	* B1	C254	A1	ET3	B1	IC218	* A1	R34	* B3	R93	B1	R243	A1	R323	* A1
C3	B2	C59	* B1	C115	A3	C255	A1	ET4	B3	IC219	* A2	R35	* B3	R94	* B1	R244	A1	R324	* A2
C4	* B2	C60	* B3	C116	A2	C256	* A1	ET5	* A3	IC220	* A2	R36	* B3	R95	* B1	R245	A1	R325	* A2
C5	* B2	C61	* A3	C117	A2	C257	A1	ET6	* A1	IC221	* A2	R37	* B3	R96	* B1	R246	B3	R326	* A1
C6	* B2	C62	* B3	C201	* A2	C258	A1	ET7	* B1			R38	* B3	R97	* B1	R247	B3	R327	B3
C7	* B2	C63	* A3	C202	* A1	C259	A1	ET8	* B3	L1	B3	R39	* B1	R98	* B1	R248	* A1	R328	* A2
C8	* B2	C64	* A3	C203	* A1	C260	* A1			L201	A2	R40	* B3	R99	* B1	R249	* A1	R329	* A2
C9	* B2	C65	B1	C205	B1	C261	A1	FB201	* A1	L202	A1	R41	* B3	R100	* B1	R250	B3	R330	* A2
C10	B2	C66	* B3	C206	A1	C262	A1	FB202	* A1	L203	A2	R42	* A1	R102	A3	R251	B3	R331	* A2
C11	* B2	C67	B1	C207	* A3	C263	A1	FB203	* A1	Q1	* B2	R43	B1	R103	* B3	R252	* A1	R332	* A2
C12	* B2	C68	* B3	C208	* A3	C264	* A1	FB204	A1	Q2	* B3	R44	* B3	R104	* B2	R253	A1		
C13	* B2	C69	* B1	C209	A1	C265	A1	FB205	A1	Q3	* B3	R45	* B1	R105	* B2	R254	A1	RB1	A2
C14	B2	C70	* B1	C210	A3	C266	* A1	FB206	* A1	Q4	* B3	R46	* B1	R106	* B1	R255	* A1	RB2	A2
C15	B3	C71	* B1	C211	A3	C267	* A1	FB207	A1	Q5	* A3	R48	* B3	R107	* B1	R256	* A1	RB3	* A3
C16	B2	C72	* B1	C212	* A3	C268	A1			Q6	* A3	R49	* B3	R108	* B1	R257	A1		
C17	* B2	C73	B1	C213	* A3	C269	A1	FL1	B2	Q7	* A3	R50	* B1	R109	* B2	R258	A1	X201	A1
C18	* B3	C74	* B3	C214	* A3	C270	A1	FL2	B1	Q8	* A2	R51	* B1	R110	* B3	R259	* A1	X202	A1
C19	B2	C75	* B1	C215	* A3	C271	A1	FL3	B1	Q201	* A3	R52	* A3	R111	* B3	R260	* A1		
C20	* B3	C76	* B1	C216	A1	C272	A1			Q202	* A3	R53	* A3	R112	* B2	R261	* A3		
C21	* B2	C77	* B1	C217	A3	C273	A2	IC1	* B2	Q203	A1	R54	B1	R113	* B2	R262	* A3		
C22	* B2	C78	* B1	C218	A3	C274	* A2	IC2	B2	Q204	A1	R55	* B3	R206	* B2	R263	* A3		
C23	* B2	C79	* A2	C219	A1	C275	* A2	IC3	* B3	Q205	* A1	R56	B1	R207	* B2	R264	* A1		
C24	* B2	C80	A2	C220	A1	C276	* A2	IC4	* B2	Q206	* A1	R57	* B3	R208	* B2	R265	* A1		
C25	* B2	C81	* A3	C221	A3	C277	* A2	IC5	* B3			R58	* B3	R209	* A1	R266	* A1		
C26	B2	C82	* A3	C222	A3	C278	A1	IC6	* B3	R1	B1	R59	* B3	R210	* A1	R267	* A1		
C27	* B2	C83	A3	C223	* A1	C279	A1	IC7	* B2	R2	B1	R60	B2	R211	* A1	R268	A1		
C28	* B2	C84	B1	C224	A1	C280	A1	IC8	* B1	R3	B1	R61	B2	R212	* A1	R269	* A2		
C29	B2	C85	B1	C225	* A1	C281	* A2	IC9	B1	R4	B1	R62	* B3	R213	* A1	R270	* A2		
C30	B3	C86	* A3	C226	A1	C282	* A2	IC10	* B3	R5	B1	R63	* B3	R214	* A1	R271	* A2		
C31	* B2	C87	* A3	C227	* A1	C283	A1	IC11	* B1	R6	* B2	R64	* B3	R215	* A1	R272	* A1		
C32	* B2	C88	* B1	C228	A1	C284	* A3	IC12	* A3	R7	* B2	R65	* B1	R216	* A1	R273	* A1		
C33	* B2	C89	A3	C229	* A1			IC13	* B3	R8	* B2	R66	* B1	R217	* A1	R274	* A1		
C34	B2	C90	* B1	C230	* A1	CL1	* A2	IC14	* A2	R9	* B2	R67	* B1	R218	A1	R275	* A1		
C35	B3	C91	* B1	C231	B3	CL2	* A2	IC15	* B1	R10	* B2	R68	* B1	R219	A1	R276	* A1		
C36	* B3	C92	* B1	C232	* A3			IC16	A2	R11	* B2	R69	* B1	R220	A1	R277	* A1		
C37	* B3	C93	* B1	C233	A1	CN1	* B1	IC17	B1	R12	* B2	R70	* B1	R221	B1	R278	* A1		
C38	B3	C94	* B1	C234	A1	CN2	* B2	IC18	* B1	R13	B2	R71	* B1	R222	B1	R279	* A1		
C39	* B3	C95	B1	C235	* A3	CN3	* B3	IC19	* B1	R14	B2	R72	* B1	R223	B1	R280	* A1		
C40	* B3	C96	* A3	C236	A1	CN4	B3	IC20	A3	R15	* B3	R73	* B1	R224	A1	R281	* A1		
C41	* B3	C97	* B1	C237	A1	CN201	A1	IC21	* B1	R16	* B3	R74	* A3	R225	B1	R282	* A1		
C42	* B3	C98	* B1	C238	* A3	CN202	* B2	IC22	A3	R17	* B3	R75	* A3	R226	A3	R283	* A1		
C43	B1	C99	* B1	C239	A1			IC23	A2	R18	B2	R76	* A1	R227	A3	R284	* A1		
C44	B1	C100	A2	C240	A1	D1	* B2	IC201	* A2	R19	* B2	R77	* A3	R228	* A3	R285	* A1		
C45	* B1	C101	A3	C241	* A3	D2	* B3	IC205	A1	R20	* B2	R78	B1	R229	* A3	R286	* A1		
C46	* B2	C102	A3	C242	* A3	D3	B3	IC206	* A3	R21	B2	R79	* A3	R230	* A3	R287	* A1		
C47	B3	C103	B1	C243	A1	D4	* B3	IC207	A1	R22	* B2	R80	* A3	R231	* A3	R288	* A1		
C48	B3	C104	A3	C244	A1	D5	* B3	IC208	A1	R23	* B2	R81	A3	R232	* A3	R289	* A1		
C49	* B1	C105	B1	C245	A2	D6	A3	IC209	* A3	R24	* B3	R82	* A2	R233	* A3	R290	* A1		
C50	* B1	C106	* B1	C246	* A2	D7	A3	IC210	A1	R25	* B2	R83	* A2	R234	* A3	R291	* A1		
C51	* B1	C107	* B1	C247	A2	D201	* A1	IC211	A1	R26	* B2	R84	* B1	R235	* A3	R292	* A1		
C52	* B1	C108	* B1	C248	A1	D202	* A1	IC212	* A1	R27	* B2	R85	* B1	R236	A1	R293	* A1		
C53	B1	C109	* B1	C249	A1			IC213	A1	R28	* B2	R86	* A2	R237	A1	R294	* A1		
C54	B3	C110	B3	C250	A2	E1	* A3	IC214	B3	R29	* B2	R87	* B1	R238	A1	R295	* A1		
C55	B3	C111	* B1	C251	A1			IC215	* A3	R30	* B2	R88	* B1	R239	A1	R296	* A1		
C56	* B1	C112	* B1	C252	A1	ET1	A3	IC216	A1	R32	* B3	R89	B1	R240	A1	R297	* A1		

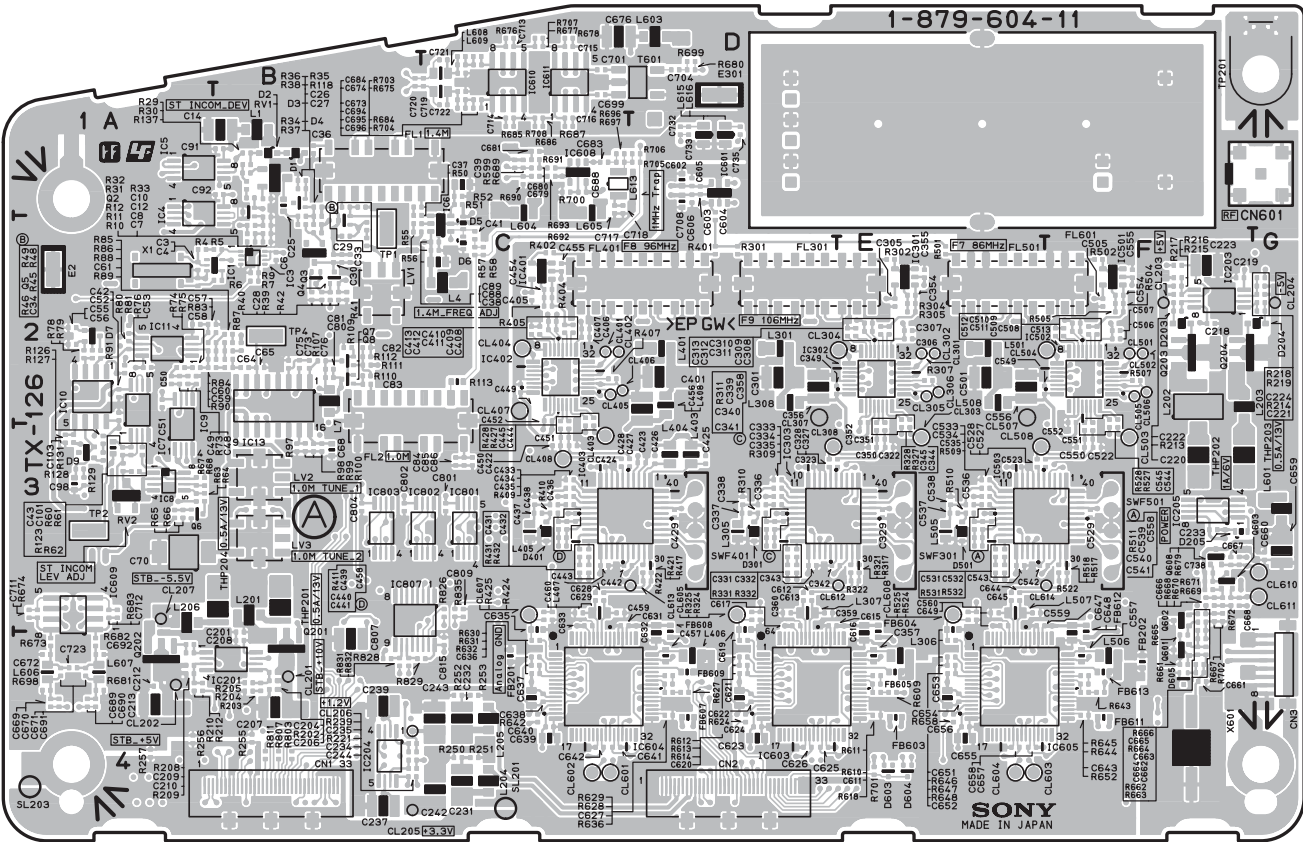

TX-126 -A SIDE-
SUFFIX: -11

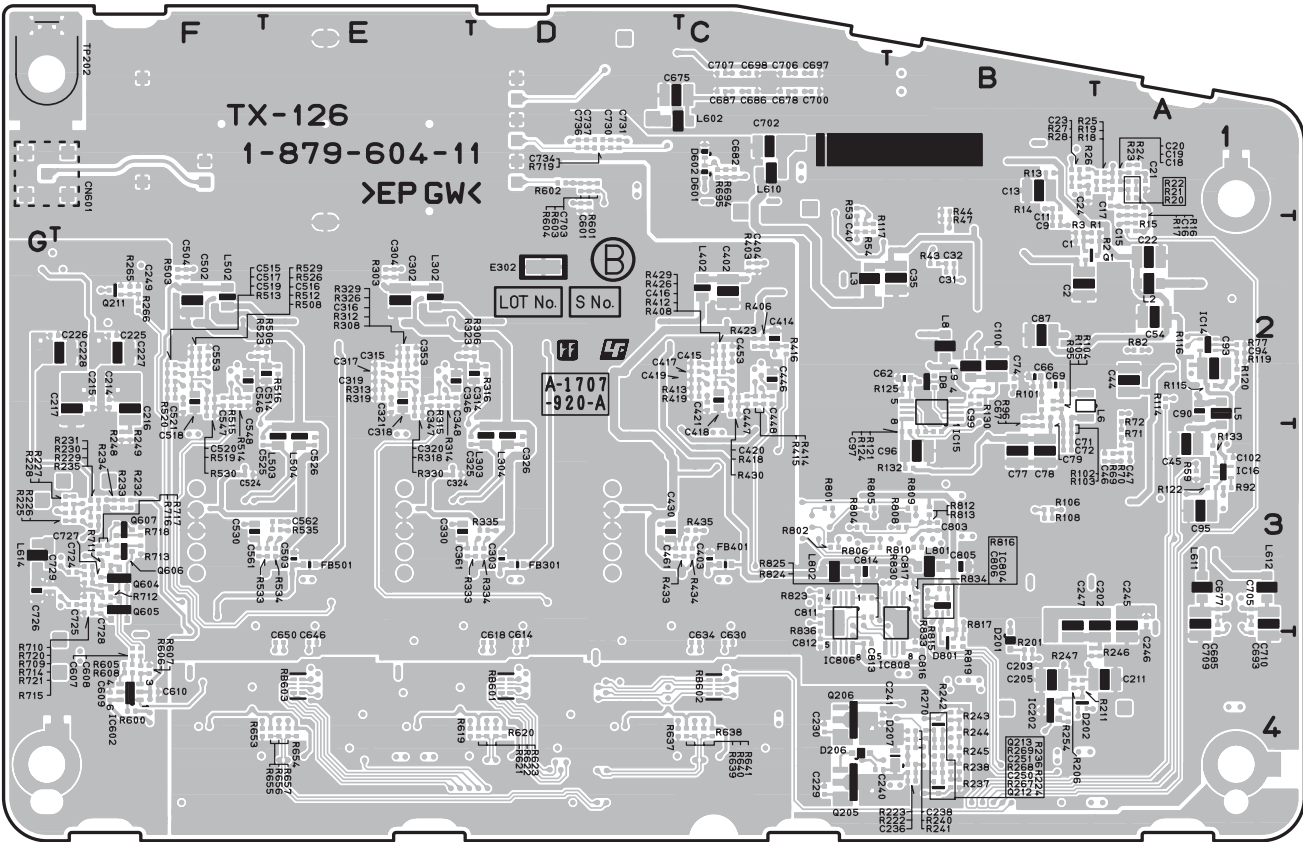

TX-126 -B SIDE-
SUFFIX: -11

TX-126 (1-879-604-11)

*:B SIDE

C1	* B2	C94	* A2	C332	D3	C501	E2	C630	* C4	C721	C1	D9	A3	L3	* C2	R6	B2	R100	B3	R266	* F2	R519	* F2	R687	C1	X1	A2
C2	* B2	C95	* A3	C333	D3	C502	* F2	C631	C3	C722	C1	D201	* B4	L4	C2	R7	B2	R101	* B2	R267	* B4	R520	* F2	R689	C1	X601	F4
C3	A2	C96	* B3	C334	D3	C503	* E3	C632	D4	C723	A4	D202	* B4	L5	* A2	R9	B2	R102	* B3	R268	* B4	R522	F3	R690	C1		
C4	A2	C97	* B3	C335	D3	C504	* F2	C633	C3	C724	* F3	D203	F2	L6	* B2	R10	B2	R103	* B3	R269	* B4	R523	* F2	R691	C1		
C6	B2	C98	A3	C336	D3	C505	F2	C634	* C4	C725	* F3	D204	G2	L7	B2	R11	B2	R104	* B2	R270	* B4	R524	E3	R692	C1		
C7	B2	C99	* B2	C337	D3	C506	F2	C635	C3	C726	* G3	D205	F3	L8	* B2	R12	B2	R105	* B2	R301	D2	R525	E3	R693	C1		
C8	B2	C100	* B2	C338	D3	C507	F2	C636	C4	C727	* F3	D206	* C4	L9	* B2	R13	* B1	R106	* B3	R302	E2	R526	* F2	R694	* C1		
C9	* B2	C101	A3	C339	D3	C508	F2	C637	C4	C728	* F3	D207	* B4	L201	B3	R14	* B1	R107	B2	R303	* E2	R527	F3	R695	* C1		
C10	B2	C102	* A3	C340	D3	C509	F2	C638	C4	C729	* G3	D301	D3	L202	F2	R15	* A2	R108	* B3	R304	E2	R528	F3	R696	C1		
C11	* B2	C103	A3	C341	D3	C510	F2	C639	C4	C730	* D1	D401	C3	L203	F2	R16	* A1	R109	B2	R305	E2	R529	* F2	R697	C1		
C12	B2	C201	B4	C342	D3	C511	F2	C640	C4	C731	* D1	D501	E3	L204	C4	R17	* A1	R110	B2	R306	* D2	R530	* F2	R698	A4		
C13	* B1	C202	* A3	C343	D3	C512	F2	C641	C4	C732	D1	D601	* C1	L205	C4	R18	* A1	R111	B2	R307	E2	R531	E3	R699	D1		
C14	B1	C203	* B4	C344	E3	C513	F2	C642	C4	C733	D1	D602	* C1	L206	A3	R19	* A1	R112	B2	R308	* E2	R532	E3	R700	C1		
C15	* A2	C204	B4	C345	E3	C514	* E2	C643	F4	C734	* D1	D603	E4	L301	D2	R20	* A1	R113	C2	R309	D3	R533	* E3	R701	E4		
C16	* A1	C205	* B4	C346	* E2	C515	* F2	C644	E3	C735	D1	D604	E4	L302	* E2	R21	* A1	R114	* A2	R310	D3	R534	* E3	R702	F3		
C17	* A1	C206	B4	C347	* E2	C516	* F2	C645	E3	C736	* D1	D605	F4	L303	* D3	R22	* A1	R115	* A2	R311	D3	R535	* E3	R703	C1		
C18	* A1	C207	B4	C348	* E2	C517	* F2	C646	* E4	C737	* D1	D801	* B4	L304	* D3	R23	* A1	R116	* A2	R312	* E2	R599	C1	R704	C1		
C19	* A1	C208	B4	C349	D2	C518	* F2	C647	E3	C738	F3			L305	D3	R24	* A1	R117	* C2	R313	* E2	R600	* F4	R705	D1		
C20	* A1	C209	A4	C350	E3	C519	* F2	C648	F4	C801	C3	E2	A2	L306	E4	R25	* A1	R118	B2	R314	* E2	R601	* D1	R706	D1		
C21	* A1	C210	A4	C351	E3	C520	* F2	C649	E3	C802	B3	E301	D1	L307	D3	R26	* B1	R119	* A2	R315	* E2	R602	* D1	R707	C1		
C22	* A2	C211	* A4	C352	E2	C521	* F2	C650	* E4	C803	* B3	E302	* D2	L308	D2	R27	* B1	R120	* A2	R316	* D2	R603	* D1	R708	C1		
C23	* B1	C212	A4	C353	* E2	C522	F3	C651	E3	C804	B3			L401	D2	R28	* B1	R121	* B3	R317	E3	R604	* D1	R709	* F3		
C24	* B1	C213	A4	C354	E2	C523	E3	C652	E4	C805	* B3	FB201	C4	L402	* C2	R29	B1	R122	* A3	R318	* E2	R605	* F4	R710	* F3		
C25	B1	C214	* F2	C355	E2	C524	* F3	C653	E4	C806	* B3	FB202	F4	L403	D3	R30	B1	R123	A3	R319	* E2	R606	* F4	R711	* F3		
C26	B2	C215	* F2	C356	D2	C525	* E3	C654	E4	C807	B4	FB301	* D3	L404	D3	R31	B1	R124	* B3	R321	E3	R607	* F4	R712	* F3		
C27	B2	C216	* F2	C357	E4	C526	* E3	C655	E4	C809	C3	FB401	* C3	L405	C3	R32	B1	R125	* B2	R322	E3	R608	* F4	R713	* F3		
C28	B2	C217	* F2	C358	D3	C527	F3	C656	E4	C811	* C3	FB501	* E3	L406	D4	R33	B1	R126	A3	R323	* E2	R609	E4	R714	* F3		
C29	B2	C218	F2	C359	D3	C528	E3	C657	E4	C812	* C4	FB603	E4	L407	C3	R34	B2	R127	A3	R324	D3	R610	E4	R715	* F3		
C30	B2	C219	F2	C360	D3	C529	F3	C658	E4	C813	* C4	FB604	E4	L408	D2	R35	B1	R128	A3	R325	D3	R611	E4	R716	* F3		
C31	* B2	C220	F2	C361	* E3	C530	* F3	C659	G3	C814	* C3	FB605	E4	L501	E2	R36	B1	R129	A3	R326	* E2	R612	D4	R717	* F3		
C32	* B2	C221	G2	C401	D2	C531	E3	C660	G3	C815	C4	FB607	D4	L502	* F2	R37	B2	R130	* B2	R327	E3	R613	D4	R718	* F3		
C33	B2	C222	F2	C402	* C2	C532	E3	C661	F4	C816	* B4	FB608	D4	L503	* E3	R38	B1	R131	A3	R328	E3	R614	D4	R719	* D1		
C34	B2	C223	F2	C403	* C3	C533	E3	C662	F4	C817	* B3	FB609	D4	L504	* E3	R39	B2	R132	* B3	R329	* E2	R618	E4	R720	* F3		
C35	* B2	C224	G2	C404	* C2	C534	E3	C663	F4	FB611	F4	L505	E3	R40	B2	R133	* A3	R330	* E2	R619	* E4	R721	* F3				
C36	B1	C225	* F2	C405	C2	C535	E3	C664	F4	FB612	F4	L506	F4	R41	B2	R137	B1	R331	D3	R620	* D4	R801	* C3				
C37	B1	C226	* G2	C406	C2	C536	E3	C665	F3	CL201	B4	FB613	F4	L507	E3	R42	B2	R201	* B4	R332	D3	R621	* D4	R802	* C3		
C38	C2	C227	* F2	C407	C2	C537	E3	C666	F3	CL202	A4			L508	E2	R43	* B2	R202	B4	R333	* D3	R622	* D4	R803	B4		
C39	C1	C228	* F2	C408	C2	C538	E3	C667	F3	CL203	F2			L509	G3	R44	* B1	R203	B4	R334	* D3	R623	* D4	R804	* C3		
C40	* C2	C229	* C4	C409	C2	C539	E3	C668	F3	CL204	G2	FL1	B1	L601	G3	R45	B2	R204	B4	R335	* D3	R624	D4	R805	* C3		
C41	C2	C230	* C4	C410	C2	C540	E3	C669	A4	CL205	B4	FL2	B2	L602	* D1	R46	B2	R205	B4	R401	D2	R627	D4	R806	* C3		
C42	A2	C231	C4	C411	C2	C541	E3	C670	A4	CL206	B4	FL301	D2	L603	D1	R47	B2	R206	* B4	R402	D2	R628	D4	R807	B4		
C43	A3	C232	C4	C412	C2	C542	E3	C671	A4	CL207	A3	FL401	D2	L604	C1	R48	* B2	R207	* B4	R403	C2	R629	D4	R808	* B3		
C44	* A2	C233	F3	C413	C2	C543	E3	C672	A4	CL208	E2	FL501	E2	L605	C1	R49	B1	R208	A4	R404	* C2	R630	C4	R809	* B3		
C45	* A3	C234	B4	C414	* C2	C544	F3	C673	C1	CL209	E3	FL601	F1	L606	A4	R50	B2	R209	A4	R405	C2	R631	C4	R810	* B3		
C46	* A3	C235	B4	C415	* C2	C545	F3	C674	C1	CL300	E2			L607	A4	R51	C1	R210	A4	R406	* C2	R632	C4	R811	B4		
C47	* A3	C236	* B4	C416	* C2	C546	* F2	C675	* D1	CL301	E2	IC1	B2	L608	C1	R52	C1	R211	* B4	R407	* C2	R633	C4	R812	* B3		
C48	A2	C237	B4	C417	* C2	C547	* F2	C676	C1	CL302	E2	IC2	B2	L609	C1	R53	* C1	R212	A4	R408	* C2	R634	D4	R813	* B3		
C49	A2	C238	* B4	C418	* C2	C548	* F2	C677	* A3	CL303	E2	IC3	B2	L610	* C1	R54	* C2	R213	F2	R409	* C2	R635	* D4	R814	* B3		
C50	A2	C239	B4	C419	* C2	C549	E2	C678	* C1	CL304	E2	IC4	A2	L611	* A3	R55	B2	R214	G2	R410	C3	R636	* C4	R815	* B3		
C51	A2	C240	* C4	C420	* C2	C550	F3	C679	C1	CL305	E2	IC5	A1	L612	* A3	R56	B2	R215	F2	R411	C3	R637	* E4	R816	* B3		
C52	A2	C241	* C4	C421	* C2	C551	F3	C680	C1	CL306	E2	IC6	C2	L613	C1	R57	B2	R216	F2	R412	C3	R638	* C4	R817	* B3		
C53	A2	C242	C4	C422	C3	C552	F2	C681	C1	CL307	E2	IC7	A2	L614	* G3	R58	C2	R217	F2	R413	* C2	R639	* E4	R818	* B3		
C54	* A2	C243	C4	C423	D3	C553	* F2	C682	* C1	CL308	E2	IC8	A3	L615	D1	R59	* A3	R218	G2	R414	* C2	R640	* E4	R819	* B4		
C55	A2	C244	B4	C424	C3	C554	F2	C683	C1	CL309	E2	IC9	A3	L616	D1	R60	A3	R219	G2	R415	* C2	R641	* C4	R820	* B3		
C56	A2	C245	* A3	C425	D3	C555	F2	C684	C1	CL310	E2	IC10	A2	L801	* B3	R61	A3	R220	B4	R416	* C2	R642	* E4	R821	* B3		
C57	A2	C246	* A3	C426	D3	C556	E2	C685	* A3	CL311	E2	IC11	A2	L802	* C3	R62	A3	R221	B4	R417	* C2	R643	* E4	R822	* B3		
C58	A2	C247	* B3	C427	D3	C557	F4	C686	* C1	CL312	E2	IC12	B2			R63	A3	R222	* B4	R418	* C2	R644	* E4	R823	* B3		
C59	A2	C248	* F2	C428	C3	C558	E3	C687	* C1	CL313	E2	IC13	B2	L611	* A3	R64	A3	R223	* B4	R419	* C2	R645	* E4	R824	* B3		
C60	A2	C250	* B4	C429	D3	C559	E3	C688	C1	CL314	E2	IC14	A2	L612	* C3	R65	A3	R224	* B4	R420	* C2	R646	* E4	R825	* B3		
C61	B2	C251	* B4	C430	* D3	C560	E3	C689	A4	CL315	E2	IC15	B2	L613	C1	R66	A3	R225	* B4	R421	* C2	R647	* E4	R826	* B3		
C62	* B2	C301	D2	C431	C3	C561	* F3	C690	A4	CL316	E2	IC16	B2	L614	* C3	R67	A3	R226	* B4	R422	* C2	R648	* E4	R827	* B3		
C63	B2	C302	* E2	C432	C3	C562	* E3	C691	A4	CL317	E2	IC17	A2	L615	* C3	R68	A3	R227	* B4	R423	* C2	R649	* E4	R828	* B3		
C64	B2	C303	* D3	C433																							

HSC-300 (UC)
HSC-300 (J)
HSC-300 (CE) J, E
9-968-613-01

Sony Corporation

Printed in Japan
2009. 4 08
©2009