

SONY®

HD COLOR CAMERA

HSC300RF

HSC100RF

HSC300R

HSC100R

Power HAD **FX** 

FACTORY SERVICE MANUAL

1st Edition

警告

このマニュアルは、サービス専用です。
お客様が、このマニュアルに記載された設置や保守、点検、修理などを行うと感電や火災、人身事故につながる可能性があります。
危険をさけるため、サービストレーニングを受けた技術者のみご使用ください。

WARNING

This manual is intended for qualified service personnel only.
To reduce the risk of electric shock, fire or injury, do not perform any servicing other than that contained in the operating instructions unless you are qualified to do so. Refer all servicing to qualified service personnel.

WARNUNG

Die Anleitung ist nur für qualifiziertes Fachpersonal bestimmt.
Alle Wartungsarbeiten dürfen nur von qualifiziertem Fachpersonal ausgeführt werden. Um die Gefahr eines elektrischen Schlages, Feuergefahr und Verletzungen zu vermeiden, sind bei Wartungsarbeiten strikt die Angaben in der Anleitung zu befolgen. Andere als die angegeben Wartungsarbeiten dürfen nur von Personen ausgeführt werden, die eine spezielle Befähigung dazu besitzen.

AVERTISSEMENT

Ce manuel est destiné uniquement aux personnes compétentes en charge de l'entretien. Afin de réduire les risques de décharge électrique, d'incendie ou de blessure n'effectuer que les réparations indiquées dans le mode d'emploi à moins d'être qualifié pour en effectuer d'autres. Pour toute réparation faire appel à une personne compétente uniquement.

Model Name	Serial No.
HSC300R (UC): Kings Triax Connector	10001 and Higher
HSC300R (J): Tajimi Triax Connector	30001 and Higher
HSC300R (CED): Fischer Triax Connector	40001 and Higher
HSC300R (CED): LEMO Triax Connector	60001 and Higher
HSC300RF (UC): LEMO Optical Fiber Connector	10001 and Higher
HSC300RF (J): Tajimi Optical Fiber Connector	30001 and Higher
HSC300RF (CED): LEMO Optical Fiber Connector	40001 and Higher
HSC300RF (E): Tajimi Optical Fiber Connector	50001 and Higher
HSC100R (UC): Kings Triax Connector	10001 and Higher
HSC100R (J): Tajimi Triax Connector	30001 and Higher
HSC100R (CED): Fischer Triax Connector	40001 and Higher
HSC100R (CED): LEMO Triax Connector	60001 and Higher
HSC100RF (UC): LEMO Optical Fiber Connector	10001 and Higher
HSC100RF (J): Tajimi Optical Fiber Connector	30001 and Higher
HSC100RF (CED): LEMO Optical Fiber Connector	40001 and Higher
HSC100RF (E): Tajimi Optical Fiber Connector	50001 and Higher

CAUTION

Use of controls or adjustments or performance of procedures other than those specified herein may result in hazardous radiation exposure.

CAUTION

The use of optical instruments with this product will increase eye hazard.

CLASS 1 LASER PRODUCT
LASER KLASSE 1 PRODUKT
LUOKAN 1 LASERLAITE
KLASS 1 LASER APPARAT

This HD color camera is classified as a CLASS 1 LASER PRODUCT.

注意

指定以外の電池に交換すると、破裂する危険があります。
必ず指定の電池に交換してください。
使用済みの電池は、国または地域の法令に従って
処理してください。

CAUTION

Danger of explosion if battery is incorrectly replaced.
Replace only with the same or equivalent type recommended by the manufacturer.
When you dispose of the battery, you must obey the law in the relative area or country.

ATTENTION

Il y a danger d'explosion s'il y a remplacement incorrect de la batterie. Remplacer uniquement avec une batterie du même type ou d'un type équivalent recommandé par le constructeur.
Lorsque vous mettez la batterie au rebut, vous devez respecter la législation en vigueur dans le pays ou la région où vous vous trouvez.

VORSICHT

Explosionsgefahr bei Verwendung falscher Batterien. Batterien nur durch den vom Hersteller empfohlenen oder einen gleichwertigen Typ ersetzen.
Wenn Sie die Batterie entsorgen, müssen Sie die Gesetze der jeweiligen Region und des jeweiligen Landes befolgen.

FÖRSIKTIGHET!

Fara för explosion vid felaktigt placerat batteri.
Byt endast mot samma eller likvärdig typ av batteri, enligt tillverkarens rekommendationer.
När du kasserar batteriet ska du följa rådande lagar för regionen eller landet.

PAS PA

Fare for eksplosion, hvis batteriet ikke udskiftes korrekt.
Udskift kun med et batteri af samme eller tilsvarende type, som er anbefalet af fabrikanten.
Når du bortskaffer batteriet, skal du følge lovgivningen i det pågældende område eller land.

HUOMIO

Räjähdyksvaara, jos akku vaihdetaan virheellisesti. Vaihda vain samanlaiseen tai vastaavatyypiseen, valmistajan suosittelemaan akkuun.
Noudata akun hävittämisesssä oman maasi tai alueesi lakeja.

FORSIKTIG

Eksplosjonsfare hvis feil type batteri settes i. Bytt ut kun med samme type eller tilsvarende anbefalt av produsenten.
Kasser batteriet i henhold til gjeldende avfallsregler.

注意

如果更换的电池不正确，就会有爆炸的危险。
只更换同一类型或制造商推荐的电池型号。
处理电池时，必须遵守相关地区或国家的法律。

目次

このマニュアルについて

本書の目的.....	3
関連マニュアル.....	3
商標について.....	3

1. Spare Parts

1-1. Note on Repair Parts.....	1-1
1-2. Electrical Parts List.....	1-2

2. Schematic Diagrams

AT-189E.....	2-1
CD-78.....	2-5
CN-3637.....	2-23
CN-3638.....	2-23
CN-3639.....	2-23
CN-3640.....	2-24
CN-3641.....	2-25
CN-3642.....	2-25
CN-3643.....	2-26
CN-3644.....	2-27
CN-3645.....	2-27
CN-3646.....	2-27
CN-3647.....	2-28
CN-3648.....	2-28
CN-3653.....	2-28
DPR-358.....	2-29
DR-675.....	2-44
FL-377.....	2-46
LE-392.....	2-46
MB-1207.....	2-47
PA-418.....	2-48
PS-879.....	2-49
RE-319.....	2-54
SDI-117.....	2-55
SE-1138.....	2-60
SW-1604.....	2-60
SW-1605.....	2-60
SW-1606.....	2-60
SW-1607.....	2-61
SW-1608.....	2-62
SW-1608A.....	2-63
SW-1609.....	2-64
SY-430.....	2-65
TG-285.....	2-84
TX-148.....	2-88

3. Board Layouts

AT-189E.....	3-1
CD-78.....	3-2
CN-3637.....	3-2
CN-3638.....	3-2
CN-3639.....	3-3
CN-3640.....	3-3
CN-3641.....	3-3
CN-3642.....	3-3
CN-3643.....	3-3
CN-3644.....	3-3
CN-3645.....	3-4
CN-3646.....	3-4
CN-3647.....	3-4
CN-3648.....	3-4
CN-3653.....	3-4
DPR-358.....	3-5
DR-675.....	3-6
FL-377.....	3-6
LE-392.....	3-6
MB-1207.....	3-7
PA-418.....	3-7
PS-879.....	3-8
RE-319.....	3-10
SDI-117.....	3-11
SE-1138.....	3-11
SW-1604.....	3-11
SW-1605.....	3-12
SW-1606.....	3-12
SW-1607.....	3-12
SW-1608.....	3-12
SW-1609.....	3-12
SY-430.....	3-13
TG-285.....	3-15
TX-148.....	3-16
Board Parts Location.....	3-17

このマニュアルについて

本書の目的

本書は、システムエンジニアやサービスエンジニアの方々にご使用いただくことを想定し、本機の保守に関する情報、部品レベルまでのサービスを前提とした情報 (パーツリスト、回路図、マウント図) を記載しています。

関連マニュアル

本機には、この「ファクトリーサービスマニュアル」のほかに、下記のマニュアルが用意されています。

- オペレーションガイド (本機に付属)
- オペレーションマニュアル CD-ROM (本機に付属)
本機を実際に運用および操作するのに必要なマニュアルです。
- サービスマニュアル (別途用意)
ブロックレベルまでのサービスに必要な情報として、本機のサービスインフォメーション、エラーメッセージ、定期点検および保守、主要部品の交換等を記載しています。

商標について

このマニュアルに記載されている商標および登録商標は下記のとおりです。

- FRAM は、米国ラムトロンインターナショナル社の登録商標です。

その他、記載されているシステム名、製品名は、一般に各開発メーカーの登録商標または商標です。

Table of Contents

Manual Structure

Purpose of this manual.....	3
Related manuals.....	3
Trademarks.....	3

1. Spare Parts

1-1. Note on Repair Parts.....	1-1
1-2. Electrical Parts List.....	1-2

2. Schematic Diagrams

AT-189E.....	2-1
CD-78.....	2-5
CN-3637.....	2-23
CN-3638.....	2-23
CN-3639.....	2-23
CN-3640.....	2-24
CN-3641.....	2-25
CN-3642.....	2-25
CN-3643.....	2-26
CN-3644.....	2-27
CN-3645.....	2-27
CN-3646.....	2-27
CN-3647.....	2-28
CN-3648.....	2-28
CN-3653.....	2-28
DPR-358.....	2-29
DR-675.....	2-44
FL-377.....	2-46
LE-392.....	2-46
MB-1207.....	2-47
PA-418.....	2-48
PS-879.....	2-49
RE-319.....	2-54
SDI-117.....	2-55
SE-1138.....	2-60
SW-1604.....	2-60
SW-1605.....	2-60
SW-1606.....	2-60
SW-1607.....	2-61
SW-1608.....	2-62
SW-1608A.....	2-63
SW-1609.....	2-64
SY-430.....	2-65
TG-285.....	2-84
TX-148.....	2-88

3. Board Layouts

AT-189E.....	3-1
CD-78.....	3-2
CN-3637.....	3-2
CN-3638.....	3-2
CN-3639.....	3-3
CN-3640.....	3-3
CN-3641.....	3-3
CN-3642.....	3-3
CN-3643.....	3-3
CN-3644.....	3-3
CN-3645.....	3-4
CN-3646.....	3-4
CN-3647.....	3-4
CN-3648.....	3-4
CN-3653.....	3-4
DPR-358.....	3-5
DR-675.....	3-6
FL-377.....	3-6
LE-392.....	3-6
MB-1207.....	3-7
PA-418.....	3-7
PS-879.....	3-8
RE-319.....	3-10
SDI-117.....	3-11
SE-1138.....	3-11
SW-1604.....	3-11
SW-1605.....	3-12
SW-1606.....	3-12
SW-1607.....	3-12
SW-1608.....	3-12
SW-1609.....	3-12
SY-430.....	3-13
TG-285.....	3-15
TX-148.....	3-16
Board Parts Location.....	3-17

Manual Structure

Purpose of this manual

This manual describes the information items that premise the service based on the components parts such as parts list, schematic diagrams, and board layouts, assuming use of system engineers and service engineers.

Related manuals

The following manual is provided for this unit in addition to this “Factory Service Manual”.

- Operation Guide (Supplied with this unit)
- Operation Manual CD-ROM (Supplied with this unit)

This manual contains information required to operate and maintain the unit.

- Service Manual (Available on request)

This manual describes service overview, error messages, periodic maintenance and inspection, replacement of main parts, and etc of the unit to provide information required for block-level service.

Trademarks

Trademarks and registered trademarks used in this manual are follows.

- FRAM is a registered trademark of Ramtron International Corporation.

Other system names and product names written in this manual are usually registered trademarks or trademarks of respective development manufacturers.

Section 1

Spare Parts

1-1. Note on Repair Parts

1. Safety Related Components Warning

WARNING

Components marked △ are critical to safe operation. Therefore, specified parts should be used in the case of replacement.

2. Standardization of Parts

Some repair parts supplied by Sony differ from those used for the unit. These are because of parts commonality and improvement.

3. Stock of Parts

Parts marked with “o” at SP (Supply Code) column of the spare parts list may not be stocked. Therefore, the delivery date will be delayed.

4. Harness

Harnesses with no part number are not registered as spare parts.

1. 安全重要部品

△警告

△印のついた部品は安全性を維持するために重要な部品です。したがって、交換する時は必ず指定の部品を使ってください。

2. 部品の共通化

ソニーから供給する補修用部品は、セットに使われているものと異なることがあります。これは部品の共通化、改良等によるものです。

3. 部品の在庫

部品表の SP (Supply code) 欄に “o” で示される部品は在庫していないことがあります。納期が長くなる場合があります。

4. ハーネス

部品番号の記載されていないハーネスは、サービス部品として登録されていません。

1-2. Electrical Parts List

AT-189E BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1974-764-A s	MOUNTED CIRCUIT BOARD, AT-189E
C100	1-112-815-91 s	CAP, CERAMIC 10MF C (1608)
C101	1-112-815-91 s	CAP, CERAMIC 10MF C (1608)
C102	1-165-884-91 s	CAP, CERAMIC 2.2MF (1608)
C103	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C104	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C105	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C106	1-112-815-91 s	CAP, CERAMIC 10MF C (1608)
C107	1-112-815-91 s	CAP, CERAMIC 10MF C (1608)
C110	1-100-881-91 s	CAP, CERAMIC 47MF C (3216)
C111	1-100-881-91 s	CAP, CERAMIC 47MF C (3216)
C112	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C113	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C114	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C115	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C116	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C118	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C120	1-112-815-91 s	CAP, CERAMIC 10MF C (1608)
C121	1-112-815-91 s	CAP, CERAMIC 10MF C (1608)
C122	1-100-881-91 s	CAP, CERAMIC 47MF C (3216)
C123	1-100-881-91 s	CAP, CERAMIC 47MF C (3216)
C124	1-100-881-91 s	CAP, CERAMIC 47MF C (3216)
C125	1-112-815-91 s	CAP, CERAMIC 10MF C (1608)
C126	1-100-881-91 s	CAP, CERAMIC 47MF C (3216)
C127	1-100-881-91 s	CAP, CERAMIC 47MF C (3216)
C136	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C138	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C140	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C142	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C143	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C144	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C200	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C201	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C300	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C301	1-100-611-91 s	CAP, CERAMIC 22MF C (2012)
C302	1-112-815-91 s	CAP, CERAMIC 10MF C (1608)
C303	1-100-611-91 s	CAP, CERAMIC 22MF C (2012)
C304	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C305	1-112-815-91 s	CAP, CERAMIC 10MF C (1608)
C306	1-112-815-91 s	CAP, CERAMIC 10MF C (1608)
C307	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C308	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C309	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C310	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C311	1-164-848-81 s	CAP, CHIP CERAMIC 8PF CH 1005
C312	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C313	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C314	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C315	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C316	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C317	1-112-815-91 s	CAP, CERAMIC 10MF C (1608)
C318	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C319	1-112-815-91 s	CAP, CERAMIC 10MF C (1608)
C320	1-164-848-81 s	CAP, CHIP CERAMIC 8PF CH 1005
C321	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C322	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C323	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C324	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C325	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C326	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C327	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005

AT-189E BOARD

Ref. No. or Q'ty	Part No.	SP Description
C328	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C329	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C330	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C331	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C332	1-164-848-81 s	CAP, CHIP CERAMIC 8PF CH 1005
C333	1-164-848-81 s	CAP, CHIP CERAMIC 8PF CH 1005
C334	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C335	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C336	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C337	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C338	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C339	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C340	1-100-611-91 s	CAP, CERAMIC 22MF C (2012)
C400	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C401	1-165-884-91 s	CAP, CERAMIC 2.2MF (1608)
C402	1-165-884-91 s	CAP, CERAMIC 2.2MF (1608)
C403	1-165-884-91 s	CAP, CERAMIC 2.2MF (1608)
C404	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C405	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C406	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C407	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C408	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C409	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C410	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C411	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C412	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C413	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C414	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C415	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C416	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C417	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C418	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C419	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C420	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C421	1-165-884-91 s	CAP, CERAMIC 2.2MF (1608)
C422	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C423	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C424	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C425	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C426	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C427	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C428	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C429	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C430	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C431	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C432	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C433	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C434	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C435	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C436	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C437	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C438	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C439	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C440	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C441	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C442	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C443	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C444	1-165-884-91 s	CAP, CERAMIC 2.2MF (1608)
C445	1-165-884-91 s	CAP, CERAMIC 2.2MF (1608)
C446	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C447	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C448	1-112-815-91 s	CAP, CERAMIC 10MF C (1608)
C449	1-165-884-91 s	CAP, CERAMIC 2.2MF (1608)
C450	1-165-884-91 s	CAP, CERAMIC 2.2MF (1608)
C451	1-112-815-91 s	CAP, CERAMIC 10MF C (1608)

AT-189E BOARD

Ref. No. or Q'ty	Part No.	SP Description
CN100	1-818-655-21 s	CONNECTOR, BOARD TO BOARD 120P
D300	6-502-197-01 s	DI SML-D12M8WT86SM
E100	1-535-757-21 s	CHIP, CHECKER
FB100	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB101	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB102	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB300	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB304	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB400	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB401	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FL100	1-234-939-21 s	FILTER, EMI REMOVAL (SMD)
FL101	1-234-939-21 s	FILTER, EMI REMOVAL (SMD)
FL300	1-234-939-21 s	FILTER, EMI REMOVAL (SMD)
FL301	1-234-939-21 s	FILTER, EMI REMOVAL (SMD)
FL302	1-234-939-21 s	FILTER, EMI REMOVAL (SMD)
FL400	1-234-939-21 s	FILTER, EMI REMOVAL (SMD)
FL401	1-234-939-21 s	FILTER, EMI REMOVAL (SMD)
FL402	1-234-939-21 s	FILTER, EMI REMOVAL (SMD)
IC100	6-706-220-01 s	IC LTC3411EMS#TR
IC101	6-706-220-01 s	IC LTC3411EMS#TR
IC102	6-712-135-01 o	IC R1173H001D-T1-FE
IC103	6-712-135-01 o	IC R1173H001D-T1-FE
IC111	8-759-598-43 s	IC TC7WH04FK
IC112	6-704-566-01 s	IC R3112N291A-TR-FE
IC113	6-710-943-01 s	IC TC74VHC164FK(EL,K)
IC300	6-715-036-01 s	IC TC7SZ04FU, RSONYJ
IC301	6-715-039-01 s	IC TC7SZ08FU, RSONYJ
IC303	6-715-036-01 s	IC TC7SZ04FU, RSONYJ
IC305	6-715-036-01 s	IC TC7SZ04FU, RSONYJ
IC309	6-715-039-01 s	IC TC7SZ08FU, RSONYJ
IC310	6-715-039-01 s	IC TC7SZ08FU, RSONYJ
IC311	6-715-039-01 s	IC TC7SZ08FU, RSONYJ
IC401	6-719-918-01 o	IC THGBM5G5A1JBAIR
L100	1-419-630-21 s	COIL, CHOKE 4.7UH
L101	1-419-630-21 s	COIL, CHOKE 4.7UH
Q100	8-729-928-91 s	TRANSISTOR DTC114EE-TL
Q101	8-729-928-91 s	TRANSISTOR DTC114EE-TL
Q300	8-729-928-91 s	TRANSISTOR DTC114EE-TL
R100	1-208-927-81 s	RES, CHIP 47K (1005)
R101	1-208-923-81 s	RES, CHIP 33K (1005)
R102	1-208-927-81 s	RES, CHIP 47K (1005)
R103	1-208-923-81 s	RES, CHIP 33K (1005)
R106	1-208-935-81 s	RES, CHIP 100K (1005)
R107	1-208-943-81 s	RES, CHIP 220K (1005)
R108	1-208-935-81 s	RES, CHIP 100K (1005)
R109	1-208-943-81 s	RES, CHIP 220K (1005)
R110	1-208-911-81 s	RES, CHIP 10K (1005)
R114	1-208-919-81 s	RES, CHIP 22K (1005)
R115	1-208-887-81 s	RES, CHIP 1.0K (1005)
R116	1-208-911-81 s	RES, CHIP 10K (1005)
R117	1-208-895-81 s	RES, CHIP 2.2K (1005)
R118	1-208-903-81 s	RES, CHIP 4.7K (1005)
R119	1-208-911-81 s	RES, CHIP 10K (1005)
R120	1-208-911-81 s	RES, CHIP 10K (1005)
R121	1-208-935-81 s	RES, CHIP 100K (1005)
R122	1-208-919-81 s	RES, CHIP 22K (1005)
R123	1-208-935-81 s	RES, CHIP 100K (1005)
R124	1-208-919-81 s	RES, CHIP 22K (1005)
R125	1-208-927-81 s	RES, CHIP 47K (1005)
R132	1-208-943-81 s	RES, CHIP 220K (1005)
R133	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R135	1-218-990-81 s	CONDUCTOR, CHIP (1005)

AT-189E BOARD

Ref. No. or Q'ty	Part No.	SP Description
R137	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R139	1-208-927-81 s	RES, CHIP 47K (1005)
R140	1-208-919-81 s	RES, CHIP 22K (1005)
R141	1-208-951-81 s	RES, CHIP 470K (1005)
R142	1-208-911-81 s	RES, CHIP 10K (1005)
R144	1-208-943-81 s	RES, CHIP 220K (1005)
R146	1-208-935-81 s	RES, CHIP 100K (1005)
R147	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R149	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R200	1-208-855-81 s	RES, CHIP 47 (1005)
R201	1-208-855-81 s	RES, CHIP 47 (1005)
R202	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R203	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R204	1-208-863-81 s	RES, CHIP 100 (1005)
R205	1-220-878-81 s	RES, CHIP 22 (1005)
R206	1-208-911-81 s	RES, CHIP 10K (1005)
R207	1-208-903-81 s	RES, CHIP 4.7K (1005)
R208	1-208-903-81 s	RES, CHIP 4.7K (1005)
R209	1-208-903-81 s	RES, CHIP 4.7K (1005)
R210	1-208-903-81 s	RES, CHIP 4.7K (1005)
R211	1-220-878-81 s	RES, CHIP 22 (1005)
R212	1-220-878-81 s	RES, CHIP 22 (1005)
R213	1-220-878-81 s	RES, CHIP 22 (1005)
R214	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R215	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R216	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R217	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R218	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R219	1-208-863-81 s	RES, CHIP 100 (1005)
R220	1-208-863-81 s	RES, CHIP 100 (1005)
R221	1-208-863-81 s	RES, CHIP 100 (1005)
R222	1-208-863-81 s	RES, CHIP 100 (1005)
R223	1-208-863-81 s	RES, CHIP 100 (1005)
R224	1-208-863-81 s	RES, CHIP 100 (1005)
R226	1-208-863-81 s	RES, CHIP 100 (1005)
R227	1-220-878-81 s	RES, CHIP 22 (1005)
R228	1-220-878-81 s	RES, CHIP 22 (1005)
R229	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R230	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R231	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R232	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R233	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R234	1-208-911-81 s	RES, CHIP 10K (1005)
R235	1-208-911-81 s	RES, CHIP 10K (1005)
R236	1-208-855-81 s	RES, CHIP 47 (1005)
R237	1-208-855-81 s	RES, CHIP 47 (1005)
R239	1-208-855-81 s	RES, CHIP 47 (1005)
R240	1-208-855-81 s	RES, CHIP 47 (1005)
R241	1-208-855-81 s	RES, CHIP 47 (1005)
R245	1-208-863-81 s	RES, CHIP 100 (1005)
R300	1-220-878-81 s	RES, CHIP 22 (1005)
R301	1-220-878-81 s	RES, CHIP 22 (1005)
R302	1-220-878-81 s	RES, CHIP 22 (1005)
R303	1-220-878-81 s	RES, CHIP 22 (1005)
R304	1-208-863-81 s	RES, CHIP 100 (1005)
R305	1-208-863-81 s	RES, CHIP 100 (1005)
R306	1-208-863-81 s	RES, CHIP 100 (1005)
R307	1-208-863-81 s	RES, CHIP 100 (1005)
R308	1-208-863-81 s	RES, CHIP 100 (1005)
R309	1-208-863-81 s	RES, CHIP 100 (1005)
R310	1-208-863-81 s	RES, CHIP 100 (1005)
R311	1-208-887-81 s	RES, CHIP 1.0K (1005)
R312	1-208-911-81 s	RES, CHIP 10K (1005)
R313	1-208-911-81 s	RES, CHIP 10K (1005)
R314	1-208-911-81 s	RES, CHIP 10K (1005)

AT-189E BOARD

Ref. No. or Q'ty	Part No.	SP Description
R315	1-208-911-81 s	RES, CHIP 10K (1005)
R316	1-208-911-81 s	RES, CHIP 10K (1005)
R317	1-208-911-81 s	RES, CHIP 10K (1005)
R319	1-208-911-81 s	RES, CHIP 10K (1005)
R320	1-208-911-81 s	RES, CHIP 10K (1005)
R321	1-208-863-81 s	RES, CHIP 100 (1005)
R322	1-208-863-81 s	RES, CHIP 100 (1005)
R323	1-208-863-81 s	RES, CHIP 100 (1005)
R324	1-208-863-81 s	RES, CHIP 100 (1005)
R325	1-208-863-81 s	RES, CHIP 100 (1005)
R326	1-208-863-81 s	RES, CHIP 100 (1005)
R327	1-208-863-81 s	RES, CHIP 100 (1005)
R328	1-208-863-81 s	RES, CHIP 100 (1005)
R329	1-208-891-81 s	RES, CHIP 1.5K (1005)
R330	1-208-891-81 s	RES, CHIP 1.5K (1005)
R331	1-208-855-81 s	RES, CHIP 47 (1005)
R332	1-220-878-81 s	RES, CHIP 22 (1005)
R333	1-208-855-81 s	RES, CHIP 47 (1005)
R334	1-208-855-81 s	RES, CHIP 47 (1005)
R335	1-208-863-81 s	RES, CHIP 100 (1005)
R336	1-208-863-81 s	RES, CHIP 100 (1005)
R337	1-208-863-81 s	RES, CHIP 100 (1005)
R338	1-208-911-81 s	RES, CHIP 10K (1005)
R340	1-208-903-81 s	RES, CHIP 4.7K (1005)
R341	1-208-863-81 s	RES, CHIP 100 (1005)
R342	1-208-863-81 s	RES, CHIP 100 (1005)
R343	1-208-863-81 s	RES, CHIP 100 (1005)
R344	1-208-863-81 s	RES, CHIP 100 (1005)
R345	1-208-863-81 s	RES, CHIP 100 (1005)
R346	1-208-903-81 s	RES, CHIP 4.7K (1005)
R347	1-208-903-81 s	RES, CHIP 4.7K (1005)
R349	1-208-863-81 s	RES, CHIP 100 (1005)
R350	1-208-863-81 s	RES, CHIP 100 (1005)
R351	1-208-863-81 s	RES, CHIP 100 (1005)
R352	1-208-863-81 s	RES, CHIP 100 (1005)
R353	1-208-863-81 s	RES, CHIP 100 (1005)
R354	1-208-863-81 s	RES, CHIP 100 (1005)
R400	1-220-878-81 s	RES, CHIP 22 (1005)
R401	1-220-878-81 s	RES, CHIP 22 (1005)
R402	1-220-878-81 s	RES, CHIP 22 (1005)
R403	1-220-878-81 s	RES, CHIP 22 (1005)
R404	1-220-878-81 s	RES, CHIP 22 (1005)
R405	1-220-878-81 s	RES, CHIP 22 (1005)
R406	1-220-878-81 s	RES, CHIP 22 (1005)
R407	1-220-878-81 s	RES, CHIP 22 (1005)
R408	1-220-878-81 s	RES, CHIP 22 (1005)
R409	1-220-878-81 s	RES, CHIP 22 (1005)
R410	1-220-878-81 s	RES, CHIP 22 (1005)
R411	1-220-878-81 s	RES, CHIP 22 (1005)
R412	1-208-871-81 s	RES, CHIP 220 (1005)
R414	1-220-878-81 s	RES, CHIP 22 (1005)
R415	1-220-878-81 s	RES, CHIP 22 (1005)
R416	1-220-878-81 s	RES, CHIP 22 (1005)
R417	1-220-878-81 s	RES, CHIP 22 (1005)
R418	1-220-878-81 s	RES, CHIP 22 (1005)
R419	1-220-878-81 s	RES, CHIP 22 (1005)
R420	1-220-878-81 s	RES, CHIP 22 (1005)
R421	1-220-878-81 s	RES, CHIP 22 (1005)
R422	1-220-878-81 s	RES, CHIP 22 (1005)
R423	1-220-878-81 s	RES, CHIP 22 (1005)
R424	1-220-878-81 s	RES, CHIP 22 (1005)
R425	1-220-878-81 s	RES, CHIP 22 (1005)
R426	1-208-871-81 s	RES, CHIP 220 (1005)
R428	1-208-863-81 s	RES, CHIP 100 (1005)
R429	1-220-878-81 s	RES, CHIP 22 (1005)

AT-189E BOARD

Ref. No. or Q'ty	Part No.	SP Description
R430	1-220-878-81 s	RES, CHIP 22 (1005)
R432	1-208-887-81 s	RES, CHIP 1.0K (1005)
R433	1-208-887-81 s	RES, CHIP 1.0K (1005)
R440	1-220-870-81 s	RES, CHIP 10 (1005)
R441	1-220-870-81 s	RES, CHIP 10 (1005)
R442	1-220-870-81 s	RES, CHIP 10 (1005)
R443	1-220-870-81 s	RES, CHIP 10 (1005)
RB200	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB201	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB202	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB203	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB204	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB205	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB206	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB207	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB302	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB303	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB304	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB305	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB306	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB307	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB308	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB309	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB310	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB311	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB312	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB313	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB314	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB315	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB316	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB317	1-234-377-21 s	RES, NETWORK 4.7K (1005X4)
RB401	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB411	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB412	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB413	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB414	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB415	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB416	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB417	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB418	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB419	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB420	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB421	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB422	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB423	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB424	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB425	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB426	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB430	1-234-370-21 s	RES, NETWORK 22 (1005X4)
TP100	1-535-757-21 s	CHIP, CHECKER
TP101	1-780-925-11 s	TERMINAL, LUG
TP102	1-780-925-11 s	TERMINAL, LUG
TP300	1-535-757-21 s	CHIP, CHECKER
X300	1-814-322-11 s	QUARTZ CRYSTAL UNITS (11.2896 MHz)
X301	1-813-205-11 s	VIBRATOR, CRYSTAL (24 MHz)

CD-78 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1969-514-A s	MOUNTED CIRCUIT BOARD, CD-78
C101	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C102	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C103	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C104	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C105	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C106	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C107	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C108	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C109	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C110	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C111	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C112	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C113	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C114	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C115	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C116	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C117	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C118	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C123	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C127	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C128	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C129	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C131	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C132	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C133	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C134	1-118-399-11 s	CAP, CERAMIC 2200PF X7R 1005
C135	1-118-399-11 s	CAP, CERAMIC 2200PF X7R 1005
C136	1-118-395-11 s	CAP, CERAMIC 4700PF X7R 1005
C137	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C138	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C139	1-164-858-81 s	CAP, CHIP CERAMIC 22PF CH 1005
C140	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C141	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C142	1-117-949-81 s	CAP, CHIP CERAMIC 820PF B1005
C143	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C144	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C145	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C146	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C147	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C148	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C149	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C150	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C151	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C152	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C153	1-116-711-11 s	CAP, CERAMIC 22MF X5R 3216
C154	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C155	1-164-936-81 s	CAP, CHIP CERAMIC 680PF B 1005
C156	1-164-936-81 s	CAP, CHIP CERAMIC 680PF B 1005
C157	1-164-936-81 s	CAP, CHIP CERAMIC 680PF B 1005
C158	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C159	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C160	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C161	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C162	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C163	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C164	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C165	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C166	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C167	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C168	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C169	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C170	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C171	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216

CD-78 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C172	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C173	1-116-711-11 s	CAP, CERAMIC 22MF X5R 3216
C174	1-100-055-21 s	CAP, CHIP CERAMIC 22MF B 3225
C175	1-116-711-11 s	CAP, CERAMIC 22MF X5R 3216
C176	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C177	1-114-548-11 s	CAP, NIOBIUM ELECT 22UF
C178	1-114-548-11 s	CAP, NIOBIUM ELECT 22UF
C179	1-114-548-11 s	CAP, NIOBIUM ELECT 22UF
C186	1-112-933-11 s	CAP, NIOBIUM ELECT 47MF
C187	1-112-933-11 s	CAP, NIOBIUM ELECT 47MF
C203	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C204	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C205	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C206	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C301	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C302	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C303	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C304	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C305	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C306	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C307	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C309	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C310	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C312	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C320	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C321	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C401	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C402	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C403	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C404	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C405	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C406	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C407	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C408	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C409	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C410	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C411	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C412	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C501	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C502	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C503	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C504	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C505	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C506	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C507	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C508	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C509	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C510	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C511	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C512	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C513	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C514	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C515	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C516	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C517	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C518	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C519	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C520	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C521	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C522	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C523	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C524	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C525	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C526	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C527	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005

[illegible][illegible]

Ref. No. or Q'ty	Part No.	SP	Description
C1202	1-118-399-11	s	CAP, CERAMIC 2200PF X7R 1005
C1203	1-118-391-11	s	CAP, CERAMIC 0.01MF X7R 1005
C1204	1-118-386-11	s	CAP, CERAMIC 0.1MF X7R 1005
C1205	1-118-386-11	s	CAP, CERAMIC 0.1MF X7R 1005
C1206	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C1207	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C1208	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C1210	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C1211	1-118-388-11	s	CAP, CERAMIC 0.047MF X7R 1005
C1212	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C1213	1-118-386-11	s	CAP, CERAMIC 0.1MF X7R 1005
C1214	1-118-386-11	s	CAP, CERAMIC 0.1MF X7R 1005
C1215	1-116-737-11	s	CAP, CERAMIC 1MF X5R 1005
C1216	1-118-386-11	s	CAP, CERAMIC 0.1MF X7R 1005
C1217	1-118-386-11	s	CAP, CERAMIC 0.1MF X7R 1005
C1218	1-116-720-11	o	CAP, CERAMIC 10MF X5R 1608
C1219	1-116-737-11	s	CAP, CERAMIC 1MF X5R 1005
C1220	1-116-737-11	s	CAP, CERAMIC 1MF X5R 1005
C1221	1-118-391-11	s	CAP, CERAMIC 0.01MF X7R 1005
C1222	1-118-386-11	s	CAP, CERAMIC 0.1MF X7R 1005
C1223	1-118-047-11	s	CAP, CERAMIC 10MF X5R (2012)
C1224	1-118-047-11	s	CAP, CERAMIC 10MF X5R (2012)
C1300	1-116-720-11	o	CAP, CERAMIC 10MF X5R 1608
C1301	1-118-386-11	s	CAP, CERAMIC 0.1MF X7R 1005
C1302	1-116-737-11	s	CAP, CERAMIC 1MF X5R 1005
C1303	1-118-391-11	s	CAP, CERAMIC 0.01MF X7R 1005
C1304	1-118-386-11	s	CAP, CERAMIC 0.1MF X7R 1005
C1305	1-116-737-11	s	CAP, CERAMIC 1MF X5R 1005
C1306	1-118-391-11	s	CAP, CERAMIC 0.01MF X7R 1005
C1307	1-118-386-11	s	CAP, CERAMIC 0.1MF X7R 1005
C1308	1-116-737-11	s	CAP, CERAMIC 1MF X5R 1005
C1309	1-118-391-11	s	CAP, CERAMIC 0.01MF X7R 1005
C1310	1-118-386-11	s	CAP, CERAMIC 0.1MF X7R 1005
C1311	1-116-737-11	s	CAP, CERAMIC 1MF X5R 1005
C1312	1-118-391-11	s	CAP, CERAMIC 0.01MF X7R 1005
C1313	1-118-386-11	s	CAP, CERAMIC 0.1MF X7R 1005
C1314	1-116-720-11	o	CAP, CERAMIC 10MF X5R 1608
C1315	1-118-386-11	s	CAP, CERAMIC 0.1MF X7R 1005
C1316	1-118-386-11	s	CAP, CERAMIC 0.1MF X7R 1005
C1317	1-118-386-11	s	CAP, CERAMIC 0.1MF X7R 1005
C1318	1-116-737-11	s	CAP, CERAMIC 1MF X5R 1005
C1319	1-118-391-11	s	CAP, CERAMIC 0.01MF X7R 1005
C1320	1-118-386-11	s	CAP, CERAMIC 0.1MF X7R 1005
C1321	1-118-386-11	s	CAP, CERAMIC 0.1MF X7R 1005
C1322	1-118-386-11	s	CAP, CERAMIC 0.1MF X7R 1005
C1323	1-116-737-11	s	CAP, CERAMIC 1MF X5R 1005
C1324	1-118-391-11	s	CAP, CERAMIC 0.01MF X7R 1005
C1325	1-118-386-11	s	CAP, CERAMIC 0.1MF X7R 1005
C1326	1-118-386-11	s	CAP, CERAMIC 0.1MF X7R 1005
C1327	1-118-386-11	s	CAP, CERAMIC 0.1MF X7R 1005
C1328	1-118-391-11	s	CAP, CERAMIC 0.01MF X7R 1005
C1329	1-116-720-11	o	CAP, CERAMIC 10MF X5R 1608
C1330	1-118-386-11	s	CAP, CERAMIC 0.1MF X7R 1005
C1331	1-116-737-11	s	CAP, CERAMIC 1MF X5R 1005
C1332	1-118-391-11	s	CAP, CERAMIC 0.01MF X7R 1005
C1333	1-118-386-11	s	CAP, CERAMIC 0.1MF X7R 1005
C1334	1-116-737-11	s	CAP, CERAMIC 1MF X5R 1005
C1335	1-118-391-11	s	CAP, CERAMIC 0.01MF X7R 1005
C1336	1-118-386-11	s	CAP, CERAMIC 0.1MF X7R 1005
C1337	1-116-737-11	s	CAP, CERAMIC 1MF X5R 1005
C1338	1-118-391-11	s	CAP, CERAMIC 0.01MF X7R 1005
C1339	1-118-386-11	s	CAP, CERAMIC 0.1MF X7R 1005
C1340	1-116-737-11	s	CAP, CERAMIC 1MF X5R 1005
C1341	1-118-391-11	s	CAP, CERAMIC 0.01MF X7R 1005
C1342	1-118-386-11	s	CAP, CERAMIC 0.1MF X7R 1005

[illegible]

CD-78 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C1440	1-118-388-11 s	CAP, CERAMIC 0.047MF X7R 1005
C1441	1-118-388-11 s	CAP, CERAMIC 0.047MF X7R 1005
C1442	1-118-388-11 s	CAP, CERAMIC 0.047MF X7R 1005
C1443	1-116-744-11 s	CAP, CERAMIC 0.22MF X5R 1005
C1444	1-116-744-11 s	CAP, CERAMIC 0.22MF X5R 1005
C1445	1-116-744-11 s	CAP, CERAMIC 0.22MF X5R 1005
C1446	1-116-744-11 s	CAP, CERAMIC 0.22MF X5R 1005
C1447	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1448	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1449	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1450	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1451	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1452	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1453	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1454	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1455	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1456	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1457	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1458	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1459	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1460	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1461	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1462	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1463	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1464	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1602	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1616	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C1617	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C1618	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1619	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1621	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1622	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1623	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1624	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1627	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1628	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1630	1-112-746-91 s	CAP, CERAMIC 4.7MF B (1608)
C1631	1-112-746-91 s	CAP, CERAMIC 4.7MF B (1608)
C1632	1-112-746-91 s	CAP, CERAMIC 4.7MF B (1608)
C1633	1-112-746-91 s	CAP, CERAMIC 4.7MF B (1608)
C1634	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
CN202	1-820-786-11 s	CONNECTOR, FFC/FPC (ZIF) 33P
CN203	1-820-786-11 s	CONNECTOR, FFC/FPC (ZIF) 33P
CN701	1-770-620-21 s	PIN, CONNECTOR 3P
CN1001	1-784-254-21 s	CONNECTOR 10P
CN1401	1-770-627-21 s	PIN, CONNECTOR 10P
D104	6-502-197-01 s	DI SML-D12M8WT86SM
D1001	6-501-436-01 s	DIODE SML412BC6TT86
D1300	8-719-074-31 s	DIODE CL-196YG-CD-T
D1301	8-719-074-31 s	DIODE CL-196YG-CD-T
D1302	8-719-074-31 s	DIODE CL-196YG-CD-T
D1401	6-501-436-01 s	DIODE SML412BC6TT86
E1	1-535-877-22 s	CHIP, CHECKER
E2	1-535-877-22 s	CHIP, CHECKER
E3	1-535-877-22 s	CHIP, CHECKER
E4	1-535-877-22 s	CHIP, CHECKER
E5	1-535-877-22 s	CHIP, CHECKER
E6	1-535-877-22 s	CHIP, CHECKER
FB101	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB102	1-400-580-21 s	FERRITE, EMI (SMD)
FB103	1-400-580-21 s	FERRITE, EMI (SMD)
FB104	1-400-580-21 s	FERRITE, EMI (SMD)
FB105	1-400-580-21 s	FERRITE, EMI (SMD)

CD-78 BOARD

Ref. No. or Q'ty	Part No.	SP Description
FB106	1-400-580-21 s	FERRITE, EMI (SMD)
FB107	1-400-580-21 s	FERRITE, EMI (SMD)
FB108	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB109	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB110	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB111	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB112	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB113	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB114	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB115	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB116	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB117	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB118	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB119	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB120	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB121	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB122	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB123	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB124	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB201	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB202	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB203	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB204	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB205	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB401	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB402	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB403	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB404	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB501	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB502	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB503	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB504	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB505	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB506	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB507	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB508	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB509	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB601	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB602	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB603	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB604	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB605	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB606	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB607	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB608	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB609	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB610	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB611	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB612	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB613	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB801	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB802	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB803	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB804	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB901	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB902	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB903	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB904	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB905	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB906	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB907	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB908	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB909	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB1001	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB1002	1-414-864-21 s	FERRITE, EMI (SMD) (1608)

CD-78 BOARD

Ref. No. or Q'ty	Part No.	SP Description
FB1003	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB1004	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB1005	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB1006	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB1100	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB1102	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB1300	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB1301	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB1302	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB1303	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB1304	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB1306	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB1307	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB1308	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB1401	1-500-448-21 s	FERRITE, EMI (SMD) (3216)
FB1402	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB1403	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB1404	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB1405	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB1406	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB1407	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB1408	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB1409	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB1603	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB1604	1-400-832-21 s	SMD EMI FERRITE
FB1605	1-400-832-21 s	SMD EMI FERRITE
FB1607	1-400-833-21 s	SMD EMI FERRITE
FB1608	1-400-833-21 s	SMD EMI FERRITE
FB1610	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
IC101	6-715-034-01 s	IC TC7SZ00FU, RSONYJ
IC102	6-715-034-01 s	IC TC7SZ00FU, RSONYJ
IC103	6-712-135-01 o	IC R1173H001D-T1-FE
IC104	6-712-135-01 o	IC R1173H001D-T1-FE
IC105	6-712-135-01 o	IC R1173H001D-T1-FE
IC107	6-713-169-01 s	IC LTC3412AEFE#TR
IC108	6-713-169-01 s	IC LTC3412AEFE#TR
IC110	6-713-169-01 s	IC LTC3412AEFE#TR
IC111	6-702-879-01 s	IC R3112N281A-TR-FE
IC201	6-706-487-01 s	IC TC7SH08FU
IC301	6-708-277-01 s	IC CDCVF25081PWR
IC302	6-715-039-01 s	IC TC7SZ08FU, RSONYJ
IC303	6-702-879-01 s	IC R3112N281A-TR-FE
IC304	6-707-850-01 s	IC TC74LCX245FT (EKJ)
IC305	6-707-850-01 s	IC TC74LCX245FT (EKJ)
IC306	6-707-845-01 s	IC TC74LCX138FT (EKJ)
IC308	6-707-850-01 s	IC TC74LCX245FT (EKJ)
IC309	6-715-039-01 s	IC TC7SZ08FU, RSONYJ
IC402	6-712-135-01 o	IC R1173H001D-T1-FE
IC403	6-712-135-01 o	IC R1173H001D-T1-FE
IC404	6-706-487-01 s	IC TC7SH08FU
IC603	6-708-637-01 s	IC NJM2871BF33-TE2
IC606	6-713-512-02 s	IC AD9744ACPZ
IC607	6-713-512-02 s	IC AD9744ACPZ
IC608	6-712-135-01 o	IC R1173H001D-T1-FE
IC702	6-715-039-01 s	IC TC7SZ08FU, RSONYJ
IC802	6-712-135-01 o	IC R1173H001D-T1-FE
IC803	6-712-135-01 o	IC R1173H001D-T1-FE
IC804	6-706-487-01 s	IC TC7SH08FU
IC1001	6-706-487-01 s	IC TC7SH08FU
IC1003	6-706-487-01 s	IC TC7SH08FU
IC1004	8-759-831-52 s	IC TC7WH125FK
IC1005	8-759-831-52 s	IC TC7WH125FK
IC1006	8-759-831-52 s	IC TC7WH125FK
IC1007	8-759-831-52 s	IC TC7WH125FK
IC1008	8-759-831-52 s	IC TC7WH125FK

CD-78 BOARD

Ref. No. or Q'ty	Part No.	SP Description
IC1009	6-706-484-01 s	IC TC7SH04FU
IC1201	6-711-254-02 s	IC ADV7392BCPZ
IC1202	8-759-561-46 s	IC AD8014ARTZ-REEL7
IC1300	8-753-276-37 o	IC CXD3195AGG-T6
IC1402	6-706-487-01 s	IC TC7SH08FU
IC1403	6-716-953-01 s	IC W25Q64CVSSIG
IC1404	6-706-487-01 s	IC TC7SH08FU
IC1405	8-759-831-52 s	IC TC7WH125FK
IC1406	6-706-484-01 s	IC TC7SH04FU
IC1407	8-759-831-52 s	IC TC7WH125FK
IC1408	8-759-831-52 s	IC TC7WH125FK
IC1409	8-759-831-52 s	IC TC7WH125FK
IC1410	8-759-831-52 s	IC TC7WH125FK
IC1601	6-706-949-01 s	IC IDT71V416S12PHG-TL
IC1602	6-714-365-01 s	IC MX29LV640EBTI-70G
IC1605	6-707-414-01 s	IC DS90LV011ATMF
IC1606	6-707-414-01 s	IC DS90LV011ATMF
IC1610	6-715-580-01 s	IC LM75A1MMX
L101	1-481-035-11 s	INDUCTOR (10UH)
L102	1-481-035-11 s	INDUCTOR (10UH)
L104	1-457-372-21 s	COIL, CHOKE 1UH
L105	1-457-372-21 s	COIL, CHOKE 1UH
L106	1-457-372-21 s	COIL, CHOKE 1UH
L107	1-412-979-41 s	INDUCTOR, SMALL TYPE 1.0UH
L108	1-412-979-41 s	INDUCTOR, SMALL TYPE 1.0UH
L201	1-400-135-21 s	INDUCTOR 1UH (2012)
L202	1-400-135-21 s	INDUCTOR 1UH (2012)
L301	1-481-175-21 s	INDUCTOR 4.7UH
L303	1-481-035-11 s	INDUCTOR (10UH)
L401	1-400-135-21 s	INDUCTOR 1UH (2012)
L402	1-400-135-21 s	INDUCTOR 1UH (2012)
L403	1-400-135-21 s	INDUCTOR 1UH (2012)
L601	1-481-035-11 s	INDUCTOR (10UH)
L602	1-414-840-21 s	INDUCTOR, CHIP 10NH (1005)
L603	1-481-035-11 s	INDUCTOR (10UH)
L801	1-400-135-21 s	INDUCTOR 1UH (2012)
L802	1-400-135-21 s	INDUCTOR 1UH (2012)
L803	1-400-135-21 s	INDUCTOR 1UH (2012)
L1201	1-481-035-11 s	INDUCTOR (10UH)
L1202	1-412-987-41 s	INDUCTOR, SMALL TYPE 4.7UH
L1203	1-481-035-11 s	INDUCTOR (10UH)
L1204	1-481-035-11 s	INDUCTOR (10UH)
L1205	1-481-035-11 s	INDUCTOR (10UH)
L1206	1-481-035-11 s	INDUCTOR (10UH)
L1207	1-481-035-11 s	INDUCTOR (10UH)
Q101	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q102	8-729-928-28 s	TRANSISTOR DTA144EE-TL
Q103	8-729-928-28 s	TRANSISTOR DTA144EE-TL
Q104	6-551-266-01 s	TRANSISTOR SI2304BDS-T1
Q105	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q106	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q107	6-551-265-01 s	TRANSISTOR SI2307BDS-T1
Q108	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q109	8-729-928-37 s	TRANSISTOR DTA114EE-TL
Q1001	8-729-928-25 s	TRANSISTOR 2SA1774TL-QR
Q1401	8-729-928-25 s	TRANSISTOR 2SA1774TL-QR
R101	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R102	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R106	1-250-543-11 o	RES, METAL FILM CHIP 100K(1005)
R107	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R108	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R109	1-250-495-11 s	RES, METAL FILM CHIP 1.0K(1005)
R110	1-250-495-11 s	RES, METAL FILM CHIP 1.0K(1005)
R111	1-250-479-11 o	RES, METAL FILM CHIP 220(1005)

CD-78 BOARD

Ref. No. or Q'ty	Part No.	SP Description
R112	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R113	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R114	1-250-479-11 o	RES, METAL FILM CHIP 220(1005)
R118	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R119	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R120	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R121	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R122	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R123	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R126	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R127	1-250-479-11 o	RES, METAL FILM CHIP 220(1005)
R130	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R144	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R146	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R148	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R150	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R154	1-243-975-81 s	RES, CHIP 4.7M (1005)
R155	1-243-975-81 s	RES, CHIP 4.7M (1005)
R156	1-243-975-81 s	RES, CHIP 4.7M (1005)
R157	1-250-551-11 s	RES,METAL FILM CHIP 220K(1005)
R158	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R159	1-250-551-11 s	RES,METAL FILM CHIP 220K(1005)
R160	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R161	1-250-551-11 s	RES,METAL FILM CHIP 220K(1005)
R162	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R163	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R164	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R165	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R166	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R167	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R168	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R169	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R170	1-250-507-11 o	RES,METAL FILM CHIP 3.3K(1005)
R172	1-248-352-11 s	RES, METAL FILM 2.2 (2012)
R173	1-248-352-11 s	RES, METAL FILM 2.2 (2012)
R174	1-248-352-11 s	RES, METAL FILM 2.2 (2012)
R175	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R176	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R177	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R178	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R201	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R202	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R203	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R204	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R205	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R206	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R207	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R208	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R209	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R210	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R211	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R212	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R213	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R214	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R216	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R217	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R218	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R219	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R220	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R221	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R222	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R223	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R224	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R225	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R226	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)

CD-78 BOARD

Ref. No. or Q'ty	Part No.	SP Description
R227	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R228	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R229	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R230	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R232	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R233	1-250-487-11 s	RES, METAL FILM CHIP 470(1005)
R234	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R302	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R304	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R305	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R306	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R308	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R309	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R310	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R311	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R312	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R313	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R314	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R315	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R316	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R317	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R318	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R320	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R321	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R322	1-250-479-11 o	RES, METAL FILM CHIP 220(1005)
R323	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R324	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R325	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R326	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R327	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R328	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R401	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R404	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R407	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R408	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R409	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R410	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R411	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R412	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R413	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R414	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R415	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R416	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R417	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R418	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R419	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R420	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R421	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R423	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R425	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R428	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R429	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R432	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R433	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R434	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R435	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R502	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R503	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R601	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R602	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R603	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R604	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R606	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R608	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R610	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)

CD-78 BOARD

Ref. No. or Q'ty	Part No.	SP Description
RB1330	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB1331	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB1401	1-234-380-21 s	RES, NETWORK 47K (1005X4)
RB1402	1-234-380-21 s	RES, NETWORK 47K (1005X4)
RB1403	1-234-380-21 s	RES, NETWORK 47K (1005X4)
RB1404	1-234-378-21 s	RES, NETWORK 10K (1005X4)
RB1405	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB1406	1-234-378-21 s	RES, NETWORK 10K (1005X4)
RB1407	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB1408	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB1501	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB1502	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB1503	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB1504	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB1505	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB1506	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB1507	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB1508	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB1509	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB1510	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB1511	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB1512	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB1514	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB1515	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB1601	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB1602	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB1603	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB1604	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB1605	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB1606	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB1607	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB1608	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB1609	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB1610	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB1611	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB1612	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB1613	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB1614	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB1615	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB1616	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB1617	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB1618	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB1619	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB1620	1-234-372-21 s	RES, NETWORK 100 (1005X4)
X401	1-813-480-11 s	OSCILLATOR, CRYSTAL
X601	1-814-223-11 s	OSCILLATOR, CRYSTAL
X801	1-813-480-11 s	OSCILLATOR, CRYSTAL

CN-3637 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1969-393-A s	MOUNTED CIRCUIT BOARD, CN-3637
C1	1-164-882-81 s	CAP,CHIP CERAMIC 220PF CH 1005
C2	1-164-882-81 s	CAP,CHIP CERAMIC 220PF CH 1005
C3	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
C4	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
C5	1-112-775-11 s	CAP, CERAMIC 2200PF X7R 1005
C6	1-112-775-11 s	CAP, CERAMIC 2200PF X7R 1005
C7	1-112-775-11 s	CAP, CERAMIC 2200PF X7R 1005
C8	1-112-775-11 s	CAP, CERAMIC 2200PF X7R 1005
C9	1-112-775-11 s	CAP, CERAMIC 2200PF X7R 1005

CN-3637 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C10	1-112-775-11 s	CAP, CERAMIC 2200PF X7R 1005
C11	1-112-775-11 s	CAP, CERAMIC 2200PF X7R 1005
C12	1-112-775-11 s	CAP, CERAMIC 2200PF X7R 1005
CN1	1-562-221-31 s	CONNECTOR (ROUND TYPE) (R-F) 12P
CN2	1-816-113-21 s	CONNECTOR 15P
FB1	1-469-324-21 s	FERRITE, EMI (SMD) (2012)
FB2	1-469-324-21 s	FERRITE, EMI (SMD) (2012)
FB3	1-481-746-11 s	SDM EMI FERRITE
FB4	1-481-746-11 s	SDM EMI FERRITE
FB5	1-481-746-11 s	SDM EMI FERRITE
FB6	1-481-746-11 s	SDM EMI FERRITE
FB7	1-481-746-11 s	SDM EMI FERRITE
FB8	1-481-746-11 s	SDM EMI FERRITE
FB9	1-481-746-11 s	SDM EMI FERRITE
FB10	1-481-746-11 s	SDM EMI FERRITE
FB11	1-481-746-11 s	SDM EMI FERRITE
FB12	1-481-746-11 s	SDM EMI FERRITE
FB13	1-481-746-11 s	SDM EMI FERRITE

CN-3638 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1969-392-A s	MOUNTED CIRCUIT BOARD, CN-3638
C1	1-114-214-81 s	CAP,CHIP CERAMIC470PF CH1005
CN1	1-822-305-11 s	CONNECTOR, ROUND TYPE 3P
CN2	1-770-623-21 s	PIN, CONNECTOR 6P
FB1	1-481-746-11 s	SDM EMI FERRITE
FB2	1-481-746-11 s	SDM EMI FERRITE
FB4	1-481-746-11 s	SDM EMI FERRITE
FB5	1-481-746-11 s	SDM EMI FERRITE
FB6	1-481-746-11 s	SDM EMI FERRITE
L2	1-457-165-21 s	COMMON MODE CHOKE COIL

CN-3639 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1969-395-A s	MOUNTED CIRCUIT BOARD, CN-3639
C1	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C2	1-112-775-11 s	CAP, CERAMIC 2200PF X7R 1005
C3	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C4	1-112-775-11 s	CAP, CERAMIC 2200PF X7R 1005
C5	1-112-775-11 s	CAP, CERAMIC 2200PF X7R 1005
C6	1-112-775-11 s	CAP, CERAMIC 2200PF X7R 1005
C8	1-112-775-11 s	CAP, CERAMIC 2200PF X7R 1005
C9	1-135-960-91 s	CAP, CHIP CERAMIC 10MF B(3225)
C10	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
CN1	1-816-041-12 s	CONNECTOR, ROUND TYPE 20P
CN2	1-819-577-21 s	PIN, CONNECTOR (PC BOARD) 15P
FB1	1-414-772-21 s	FERRITE, EMI (SMD) (2012)
FB2	1-414-772-21 s	FERRITE, EMI (SMD) (2012)
FB3	1-400-832-21 s	SMD EMI FERRITE
FB4	1-400-832-21 s	SMD EMI FERRITE
FB5	1-400-832-21 s	SMD EMI FERRITE
FB6	1-400-832-21 s	SMD EMI FERRITE

CN-3639 BOARD

Ref. No. or Q'ty	Part No.	SP Description
FB7	1-400-832-21 s	SMD EMI FERRITE
FB8	1-400-832-21 s	SMD EMI FERRITE
FB9	1-400-832-21 s	SMD EMI FERRITE
FB10	1-400-832-21 s	SMD EMI FERRITE
FB11	1-400-832-21 s	SMD EMI FERRITE
FB12	1-400-832-21 s	SMD EMI FERRITE
FB13	1-400-832-21 s	SMD EMI FERRITE
JC1	1-216-864-91 s	CONDUCTOR, CHIP (1608)

CN-3640 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1969-396-A s	MOUNTED CIRCUIT BOARD, CN-3640
C1	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C2	1-135-960-91 s	CAP, CHIP CERAMIC 10MF B(3225)
C3	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C4	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
C5	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
C6	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C7	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
C8	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C9	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C10	1-114-507-11 s	CAP, CERAMIC 1UF X7R
C11	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
C12	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
CN1	1-816-755-21 s	CONNECTOR (SM20B-SRSS-TB)
CN2	1-816-113-21 s	CONNECTOR 15P
CN3	1-778-965-21 s	CONNECTOR 12P
CN5	1-785-946-21 s	CONNECTOR 3P
CN6	1-793-152-21 o	CONNECTOR 11P
D3	8-719-989-04 s	DIODE DAN222-TL
IC1	6-714-067-01 s	IC PCA9555DB-T
IC3	6-711-237-01 s	IC NJM2878F3-33 (TE2)
IC4	6-706-476-01 s	IC TC7SET04FU
IC5	6-706-476-01 s	IC TC7SET04FU
IC201	6-713-118-01 s	IC PCA9554BS-T
RB1	1-234-375-21 s	RES, NETWORK 1K (1005X4)
RB2	1-234-371-21 s	RES, NETWORK 47 (1005X4)

CN-3641 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1969-387-A s	MOUNTED CIRCUIT BOARD, CN-3641
C1	1-114-214-81 s	CAP,CHIP CERAMIC470PF CH1005
C2	1-114-214-81 s	CAP,CHIP CERAMIC470PF CH1005
CN1	1-770-623-21 s	PIN, CONNECTOR 6P
CN2	1-822-305-11 s	CONNECTOR, ROUND TYPE 3P
CN3	1-822-305-11 s	CONNECTOR, ROUND TYPE 3P
FB1	1-400-832-21 s	SMD EMI FERRITE
FB2	1-400-832-21 s	SMD EMI FERRITE
FB3	1-400-832-21 s	SMD EMI FERRITE
FB4	1-400-832-21 s	SMD EMI FERRITE
FB5	1-400-832-21 s	SMD EMI FERRITE
FB6	1-400-832-21 s	SMD EMI FERRITE
FB7	1-400-832-21 s	SMD EMI FERRITE

CN-3641 BOARD

Ref. No. or Q'ty	Part No.	SP Description
FB8	1-400-832-21 s	SMD EMI FERRITE
FB9	1-400-832-21 s	SMD EMI FERRITE
FB10	1-400-832-21 s	SMD EMI FERRITE
L1	1-457-165-21 s	COMMON MODE CHOKE COIL
L2	1-457-165-21 s	COMMON MODE CHOKE COIL

CN-3642 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1969-388-A s	MOUNTED CIRCUIT BOARD, CN-3642
C1	1-135-960-91 s	CAP, CHIP CERAMIC 10MF B(3225)
CN1	1-778-646-31 s	CONNECTOR, FFC/FPC(ZIF) ST 10P
CN2	1-817-109-11 s	CONNECTOR, USB (A)
FB1	1-414-772-21 s	FERRITE. EMI (SMD) (2012)
FB2	1-414-772-21 s	FERRITE. EMI (SMD) (2012)
L1	1-481-265-21 s	COMMON MODE CHOKE COIL
VDR1	1-802-245-11 s	ESD SUPPRESSOR
VDR2	1-802-245-11 s	ESD SUPPRESSOR

CN-3643 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1969-389-A s	MOUNTED CIRCUIT BOARD, CN-3643
C1	1-114-507-11 s	CAP, CERAMIC 1UF X7R
C2	1-114-507-11 s	CAP, CERAMIC 1UF X7R
C3	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C7	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C8	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C9	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C10	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C11	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C12	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C13	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C14	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C22	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C24	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
C27	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C28	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C29	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C31	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C32	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C33	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
C34	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
C35	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C36	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C37	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C38	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C39	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
CN1	1-778-648-31 s	CONNECTOR, FFC/FPC(ZIF) ST 20P
CN2	1-770-624-21 s	PIN, CONNECTOR 7P
CN3	1-770-621-21 s	PIN, CONNECTOR 4P
CN4	1-565-443-11 o	RECEPTACLE, CONNECTOR 10P
CN7	1-563-929-11 s	CONNECTOR, ROUND TYPE (RF) 4P
CN8	1-562-222-21 s	CONNECTOR, ROUND TYPE 6P

CN-3643 BOARD

Ref. No. or Q'ty	Part No.	SP Description
D1	8-719-989-04 s	DIODE DAN222-TL
FB5	1-234-518-21 s	ARRAY, FERRITE CHIP
FB6	1-234-518-21 s	ARRAY, FERRITE CHIP
FB13	1-400-832-21 s	SMD EMI FERRITE
FB14	1-400-832-21 s	SMD EMI FERRITE
FB17	1-400-832-21 s	SMD EMI FERRITE
FB18	1-234-518-21 s	ARRAY, FERRITE CHIP
IC1	6-714-067-01 s	IC PCA9555DB-T
R1	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R2	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
RB1	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB2	1-234-375-21 s	RES, NETWORK 1K (1005X4)
RB3	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB5	1-234-375-21 s	RES, NETWORK 1K (1005X4)
S1	1-570-863-11 s	SWITCH, SLIDE
S2	1-570-853-11 s	SWITCH, SLIDE
S3	1-570-853-11 s	SWITCH, SLIDE
THP1	△ 1-802-108-11 s	THERMISTOR, POSITIVE
THP2	△ 1-802-108-11 s	THERMISTOR, POSITIVE

CN-3644 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1969-390-A s	MOUNTED CIRCUIT BOARD, CN-3644
C1	1-100-581-81 s	CAP,CHIP CERAMIC0.0047MF B1005
C2	1-100-581-81 s	CAP,CHIP CERAMIC0.0047MF B1005
CN1	1-770-626-21 s	PIN, CONNECTOR 9P
CN2	1-766-696-11 o	CONNECTOR, ROUND TYPE 8P
FB1	1-234-518-21 s	ARRAY, FERRITE CHIP
FB2	1-400-832-21 s	SMD EMI FERRITE
FB3	1-400-832-21 s	SMD EMI FERRITE
FB4	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB5	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB6	1-469-094-21 s	FERRITE, EMI (SMD) (1608)

CN-3645 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1969-391-A s	MOUNTED CIRCUIT BOARD, CN-3645
C1	1-112-775-11 s	CAP, CERAMIC 2200PF X7R 1005
C2	1-112-775-11 s	CAP, CERAMIC 2200PF X7R 1005
CN1	1-770-620-21 s	PIN, CONNECTOR 3P
CN2	1-507-980-21 s	JACK
FB1	1-234-518-21 s	ARRAY, FERRITE CHIP

CN-3646 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1946-168-A s	MOUNTED CIRCUIT BOARD, CN-3646
2pcs	3-863-319-01 s	BRACKET BNC
CN1	1-770-621-21 s	PIN, CONNECTOR 4P
CN2	1-580-724-12 s	CONNECTOR, BNC
CN3	1-580-724-12 s	CONNECTOR, BNC
FB1	1-469-108-21 s	FERRITE, EMI (SMD) (1608)
FB2	1-469-108-21 s	FERRITE, EMI (SMD) (1608)

CN-3647 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1946-169-A s	MOUNTED CIRCUIT BOARD, CN-3647
C1	1-114-214-81 s	CAP,CHIP CERAMIC470PF CH1005
C2	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C3	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
CN1	1-817-940-11 s	CONNECTOR, ROUND TYPE 5P
CN2	1-770-625-21 s	PIN, CONNECTOR 8P
FB1	1-400-832-21 s	SMD EMI FERRITE
FB2	1-400-832-21 s	SMD EMI FERRITE
FB3	1-400-832-21 s	SMD EMI FERRITE
L1	1-457-165-21 s	COMMON MODE CHOKE COIL

CN-3648 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1946-170-A s	MOUNTED CIRCUIT BOARD, CN-3648
C1	1-116-709-11 s	CAP, CERAMIC 22MF X5R 3225
C2	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
C3	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
CN1	1-820-882-11 s	CONNECTOR (RECEPTACLE), XLR
CN2	1-580-533-11 s	PIN, CONNECTOR (PC BOARD) 8P
FB1	1-414-772-21 s	FERRITE. EMI (SMD) (2012)
FB2	1-414-772-21 s	FERRITE. EMI (SMD) (2012)
FB3	1-414-772-21 s	FERRITE. EMI (SMD) (2012)
FB4	1-414-772-21 s	FERRITE. EMI (SMD) (2012)
FB5	1-414-772-21 s	FERRITE. EMI (SMD) (2012)
FB6	1-414-772-21 s	FERRITE. EMI (SMD) (2012)
FB7	1-414-772-21 s	FERRITE. EMI (SMD) (2012)
FB8	1-414-772-21 s	FERRITE. EMI (SMD) (2012)

CN-3653 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1969-374-A s	MOUNTED CIRCUIT BOARD, CN-3653
C101	△ 1-116-012-11 s	CAP, METALIZED PE FILM 0.1MF
CN101	△ 1-691-961-11 s	PIN, CONNECTOR (PC BOARD) 3P
CN102	△ 1-691-960-11 o	PIN, CONNECTOR (PC BOARD) 3P
CN103	1-695-479-21 o	PIN, CONNECTOR (PC BOARD) 2P

CN-3653 BOARD

Ref. No. or Q'ty	Part No.	SP Description
CN104	1-695-479-21 o	PIN, CONNECTOR (PC BOARD) 2P
FB101	1-469-979-21 s	INDUCTOR, FERRITE BEAD
FB102	1-469-979-21 s	INDUCTOR, FERRITE BEAD
L101	1-457-455-11 s	CHOKE COIL 10UH
L102	1-457-455-11 s	CHOKE COIL 10UH
TP101	1-780-925-11 s	TERMINAL, LUG
TP102	1-780-925-11 s	TERMINAL, LUG

DPR-358 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1969-513-A s	MOUNTED CIRCUIT BOARD, DPR-358
3pcs	3-729-061-02 s	SCREW (M2) (TYPE 1)
C001	1-118-399-11 s	CAP, CERAMIC 2200PF X7R 1005
C002	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C003	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C004	1-118-395-11 s	CAP, CERAMIC 4700PF X7R 1005
C005	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C006	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C007	1-164-941-81 s	CAP,CHIP CERAMIC 4700PF B 1005
C008	1-164-858-81 s	CAP, CHIP CERAMIC 22PF CH 1005
C009	1-118-039-11 s	CAP, CERAMIC 1MF X5R (1608)
C010	1-118-039-11 s	CAP, CERAMIC 1MF X5R (1608)
C011	1-112-916-11 s	CAP, NIOBIUM ELECT 47MF 105
C012	1-112-916-11 s	CAP, NIOBIUM ELECT 47MF 105
C013	1-164-858-81 s	CAP, CHIP CERAMIC 22PF CH 1005
C014	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C015	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C016	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C017	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C018	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C021	1-114-214-81 s	CAP,CHIP CERAMIC470PF CH1005
C022	1-114-214-81 s	CAP,CHIP CERAMIC470PF CH1005
C023	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C024	1-114-214-81 s	CAP,CHIP CERAMIC470PF CH1005
C025	1-164-858-81 s	CAP, CHIP CERAMIC 22PF CH 1005
C026	1-164-858-81 s	CAP, CHIP CERAMIC 22PF CH 1005
C028	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C029	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C030	1-164-858-81 s	CAP, CHIP CERAMIC 22PF CH 1005
C031	1-116-865-11 s	CAP, CERAMIC 10MF X5R 3216
C032	1-116-865-11 s	CAP, CERAMIC 10MF X5R 3216
C033	1-118-039-11 s	CAP, CERAMIC 1MF X5R (1608)
C034	1-116-865-11 s	CAP, CERAMIC 10MF X5R 3216
C035	1-116-865-11 s	CAP, CERAMIC 10MF X5R 3216
C036	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C037	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C038	1-116-865-11 s	CAP, CERAMIC 10MF X5R 3216
C039	1-116-865-11 s	CAP, CERAMIC 10MF X5R 3216
C040	1-164-936-81 s	CAP, CHIP CERAMIC 680PF B 1005
C041	1-164-936-81 s	CAP, CHIP CERAMIC 680PF B 1005
C042	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C043	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C044	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C045	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C046	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C047	1-164-936-81 s	CAP, CHIP CERAMIC 680PF B 1005
C048	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C049	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C050	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216

DPR-358 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C051	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C052	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C053	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C054	1-116-708-11 s	CAP, CERAMIC 47MF X6S 3216
C055	1-116-708-11 s	CAP, CERAMIC 47MF X6S 3216
C056	1-116-708-11 s	CAP, CERAMIC 47MF X6S 3216
C057	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C058	1-116-708-11 s	CAP, CERAMIC 47MF X6S 3216
C059	1-116-708-11 s	CAP, CERAMIC 47MF X6S 3216
C060	1-118-039-11 s	CAP, CERAMIC 1MF X5R (1608)
C061	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C062	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C063	1-116-708-11 s	CAP, CERAMIC 47MF X6S 3216
C064	1-116-708-11 s	CAP, CERAMIC 47MF X6S 3216
C065	1-116-708-11 s	CAP, CERAMIC 47MF X6S 3216
C066	1-116-708-11 s	CAP, CERAMIC 47MF X6S 3216
C067	1-116-708-11 s	CAP, CERAMIC 47MF X6S 3216
C068	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C069	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C070	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C071	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C072	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C073	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C074	1-116-708-11 s	CAP, CERAMIC 47MF X6S 3216
C075	1-116-708-11 s	CAP, CERAMIC 47MF X6S 3216
C076	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C077	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C078	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C079	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C080	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C081	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C082	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C083	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C084	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C085	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C086	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C087	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C088	1-118-039-11 s	CAP, CERAMIC 1MF X5R (1608)
C089	1-118-039-11 s	CAP, CERAMIC 1MF X5R (1608)
C090	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C091	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C092	1-114-548-11 s	CAP, NIOBIUM ELECT 22UF
C093	1-114-548-11 s	CAP, NIOBIUM ELECT 22UF
C094	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C095	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C096	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C097	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C098	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C099	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C100	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C101	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C102	1-118-395-11 s	CAP, CERAMIC 4700PF X7R 1005
C105	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C106	1-118-395-11 s	CAP, CERAMIC 4700PF X7R 1005
C107	1-164-858-81 s	CAP, CHIP CERAMIC 22PF CH 1005
C108	1-164-858-81 s	CAP, CHIP CERAMIC 22PF CH 1005
C109	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C110	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C111	1-118-039-11 s	CAP, CERAMIC 1MF X5R (1608)
C112	1-118-039-11 s	CAP, CERAMIC 1MF X5R (1608)
C115	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C116	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C117	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C118	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C119	1-114-214-81 s	CAP,CHIP CERAMIC470PF CH1005

DPR-358 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C120	1-114-214-81 s	CAP,CHIP CERAMIC470PF CH1005
C121	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C122	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C123	1-164-858-81 s	CAP, CHIP CERAMIC 22PF CH 1005
C124	1-164-858-81 s	CAP, CHIP CERAMIC 22PF CH 1005
C125	1-114-548-11 s	CAP, NIOBIUM ELECT 22UF
C126	1-112-916-11 s	CAP, NIOBIUM ELECT 47MF 105
C127	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C128	1-116-865-11 s	CAP, CERAMIC 10MF X5R 3216
C129	1-116-865-11 s	CAP, CERAMIC 10MF X5R 3216
C130	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C131	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C132	1-116-865-11 s	CAP, CERAMIC 10MF X5R 3216
C133	1-116-865-11 s	CAP, CERAMIC 10MF X5R 3216
C134	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C135	1-164-936-81 s	CAP, CHIP CERAMIC 680PF B 1005
C136	1-164-936-81 s	CAP, CHIP CERAMIC 680PF B 1005
C137	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C138	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C139	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C140	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C141	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C142	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C143	1-116-708-11 s	CAP, CERAMIC 47MF X6S 3216
C144	1-116-708-11 s	CAP, CERAMIC 47MF X6S 3216
C145	1-116-708-11 s	CAP, CERAMIC 47MF X6S 3216
C146	1-116-708-11 s	CAP, CERAMIC 47MF X6S 3216
C147	1-116-708-11 s	CAP, CERAMIC 47MF X6S 3216
C148	1-116-708-11 s	CAP, CERAMIC 47MF X6S 3216
C149	1-116-708-11 s	CAP, CERAMIC 47MF X6S 3216
C151	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C152	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C153	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C154	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C155	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C156	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C157	1-116-708-11 s	CAP, CERAMIC 47MF X6S 3216
C200	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C202	1-118-039-11 s	CAP, CERAMIC 1MF X5R (1608)
C203	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C204	1-112-916-11 s	CAP, NIOBIUM ELECT 47MF 105
C205	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C208	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C209	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C210	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C211	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C212	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C213	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C214	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C215	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C216	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C217	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C218	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C219	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C222	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C223	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C224	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C225	1-164-858-81 s	CAP, CHIP CERAMIC 22PF CH 1005
C226	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C227	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C300	1-164-847-81 s	CAP, CHIP CERAMIC 7PF CH 1005
C301	1-164-847-81 s	CAP, CHIP CERAMIC 7PF CH 1005
C302	1-114-238-91 s	CAP, CERAMIC 22MF B
C303	1-114-238-91 s	CAP, CERAMIC 22MF B
C304	1-114-238-91 s	CAP, CERAMIC 22MF B

DPR-358 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C305	1-114-238-91 s	CAP, CERAMIC 22MF B
C306	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C307	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C308	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C309	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C310	1-118-039-11 s	CAP, CERAMIC 1MF X5R (1608)
C311	1-118-039-11 s	CAP, CERAMIC 1MF X5R (1608)
C312	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C313	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C314	1-164-854-81 s	CAP, CHIP CERAMIC 15PF CH 1005
C315	1-164-854-81 s	CAP, CHIP CERAMIC 15PF CH 1005
C318	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C319	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C320	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C321	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C322	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C323	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C324	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C325	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C326	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C327	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C328	1-164-840-81 s	CAP, CHIP CERAMIC 1PF CK 1005
C329	1-164-858-81 s	CAP, CHIP CERAMIC 22PF CH 1005
C330	1-164-840-81 s	CAP, CHIP CERAMIC 1PF CK 1005
C331	1-164-840-81 s	CAP, CHIP CERAMIC 1PF CK 1005
C332	1-164-858-81 s	CAP, CHIP CERAMIC 22PF CH 1005
C333	1-164-840-81 s	CAP, CHIP CERAMIC 1PF CK 1005
C334	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C335	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C336	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C337	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C338	1-116-732-11 s	CAP, CERAMIC 2.2MF X5R 1005
C339	1-116-732-11 s	CAP, CERAMIC 2.2MF X5R 1005
C340	1-116-403-91 s	CAP, CERAMIC 10MF B 1608
C341	1-116-403-91 s	CAP, CERAMIC 10MF B 1608
C342	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C343	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C344	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C345	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C346	1-116-732-11 s	CAP, CERAMIC 2.2MF X5R 1005
C347	1-116-732-11 s	CAP, CERAMIC 2.2MF X5R 1005
C348	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C349	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C350	1-114-238-91 s	CAP, CERAMIC 22MF B
C351	1-114-238-91 s	CAP, CERAMIC 22MF B
C352	1-164-847-81 s	CAP, CHIP CERAMIC 7PF CH 1005
C353	1-114-238-91 s	CAP, CERAMIC 22MF B
C354	1-114-238-91 s	CAP, CERAMIC 22MF B
C355	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C356	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C357	1-118-039-11 s	CAP, CERAMIC 1MF X5R (1608)
C358	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C359	1-164-854-81 s	CAP, CHIP CERAMIC 15PF CH 1005
C360	1-118-039-11 s	CAP, CERAMIC 1MF X5R (1608)
C362	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C363	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C364	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C365	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C366	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C367	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C368	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C369	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C370	1-118-039-11 s	CAP, CERAMIC 1MF X5R (1608)
C371	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C372	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005

DPR-358 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C373	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C374	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C375	1-164-840-81 s	CAP, CHIP CERAMIC 1PF CK 1005
C376	1-164-858-81 s	CAP, CHIP CERAMIC 22PF CH 1005
C377	1-164-840-81 s	CAP, CHIP CERAMIC 1PF CK 1005
C378	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C379	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C380	1-116-732-11 s	CAP, CERAMIC 2.2MF X5R 1005
C381	1-116-403-91 s	CAP, CERAMIC 10MF B 1608
C382	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C383	1-118-039-11 s	CAP, CERAMIC 1MF X5R (1608)
C384	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C385	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C386	1-116-732-11 s	CAP, CERAMIC 2.2MF X5R 1005
C387	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C388	1-114-238-91 s	CAP, CERAMIC 22MF B
C389	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C390	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C391	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C392	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C393	1-164-852-81 s	CAP, CHIP CERAMIC 12PF CH 1005
C394	1-164-843-81 s	CAP, CHIP CERAMIC 3PF CJ 1005
C395	1-164-843-81 s	CAP, CHIP CERAMIC 3PF CJ 1005
C396	1-164-843-81 s	CAP, CHIP CERAMIC 3PF CJ 1005
C397	1-164-843-81 s	CAP, CHIP CERAMIC 3PF CJ 1005
C398	1-164-843-81 s	CAP, CHIP CERAMIC 3PF CJ 1005
C399	1-164-843-81 s	CAP, CHIP CERAMIC 3PF CJ 1005
C400	1-116-708-11 s	CAP, CERAMIC 47MF X6S 3216
C401	1-116-744-11 s	CAP, CERAMIC 0.22MF X5R 1005
C402	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C403	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C404	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C405	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C406	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C407	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C408	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C409	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C410	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C411	1-118-399-11 s	CAP, CERAMIC 2200PF X7R 1005
C412	1-118-399-11 s	CAP, CERAMIC 2200PF X7R 1005
C413	1-118-399-11 s	CAP, CERAMIC 2200PF X7R 1005
C414	1-118-399-11 s	CAP, CERAMIC 2200PF X7R 1005
C415	1-118-399-11 s	CAP, CERAMIC 2200PF X7R 1005
C416	1-118-399-11 s	CAP, CERAMIC 2200PF X7R 1005
C417	1-118-399-11 s	CAP, CERAMIC 2200PF X7R 1005
C418	1-118-399-11 s	CAP, CERAMIC 2200PF X7R 1005
C419	1-118-399-11 s	CAP, CERAMIC 2200PF X7R 1005
C420	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C421	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C422	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C423	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C424	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C425	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C426	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C427	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C428	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C429	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C430	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C431	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C432	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C433	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C434	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C435	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C436	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C448	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)

DPR-358 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C449	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C450	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C451	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C452	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C453	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C454	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C455	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C456	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C457	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C458	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C459	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C460	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C461	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C462	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C463	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C464	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C465	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C466	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C467	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C468	1-116-744-11 s	CAP, CERAMIC 0.22MF X5R 1005
C469	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C470	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C471	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C472	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C473	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C474	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C475	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C476	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C480	1-116-403-91 s	CAP, CERAMIC 10MF B 1608
C481	1-116-403-91 s	CAP, CERAMIC 10MF B 1608
C482	1-116-403-91 s	CAP, CERAMIC 10MF B 1608
C483	1-116-732-11 s	CAP, CERAMIC 2.2MF X5R 1005
C484	1-116-732-11 s	CAP, CERAMIC 2.2MF X5R 1005
C485	1-116-732-11 s	CAP, CERAMIC 2.2MF X5R 1005
C500	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C501	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C502	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C503	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C504	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C505	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C506	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C507	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C508	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C509	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C510	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C511	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C512	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C513	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C514	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C515	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C516	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C517	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C518	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C519	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C520	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C521	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C522	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C523	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C524	1-116-713-11 s	CAP, CERAMIC 22MF X5R 2012
C525	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C526	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C527	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C528	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C529	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C549	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005

DPR-358 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C814	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C815	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C816	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C817	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C818	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C819	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C820	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C821	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C822	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C823	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C824	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C825	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C826	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C829	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C830	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C831	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C832	1-118-395-11 s	CAP, CERAMIC 4700PF X7R 1005
C833	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C834	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C835	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C836	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C837	1-164-866-81 s	CAP, CHIP CERAMIC 47PF CH 1005
C838	1-164-842-81 s	CAP,CHIP CERAMIC 2.0PF CK 1005
C839	1-164-842-81 s	CAP,CHIP CERAMIC 2.0PF CK 1005
C840	1-164-842-81 s	CAP,CHIP CERAMIC 2.0PF CK 1005
C841	1-164-843-81 s	CAP, CHIP CERAMIC 3PF CJ 1005
C843	1-164-845-81 s	CAP, CHIP CERAMIC 5PF CH 1005
C845	1-164-845-81 s	CAP, CHIP CERAMIC 5PF CH 1005
C847	1-164-845-81 s	CAP, CHIP CERAMIC 5PF CH 1005
C848	1-164-858-81 s	CAP, CHIP CERAMIC 22PF CH 1005
C849	1-164-852-81 s	CAP, CHIP CERAMIC 12PF CH 1005
C850	1-164-852-81 s	CAP, CHIP CERAMIC 12PF CH 1005
C851	1-164-852-81 s	CAP, CHIP CERAMIC 12PF CH 1005
C852	1-164-843-81 s	CAP, CHIP CERAMIC 3PF CJ 1005
C853	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C854	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C855	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C856	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C857	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C858	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C859	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C860	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C861	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C862	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C863	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C864	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C865	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C866	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C867	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C868	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C869	1-164-845-81 s	CAP, CHIP CERAMIC 5PF CH 1005
C870	1-164-845-81 s	CAP, CHIP CERAMIC 5PF CH 1005
C871	1-164-858-81 s	CAP, CHIP CERAMIC 22PF CH 1005
C872	1-164-845-81 s	CAP, CHIP CERAMIC 5PF CH 1005
C874	1-164-845-81 s	CAP, CHIP CERAMIC 5PF CH 1005
C875	1-114-238-91 s	CAP, CERAMIC 22MF B
C876	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C877	1-114-238-91 s	CAP, CERAMIC 22MF B
C878	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C900	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C901	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C902	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C903	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C904	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C905	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216

DPR-358 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C906	1-114-548-11 s	CAP, NIOBIUM ELECT 22UF
C907	1-114-549-11 s	CAP, NIOBIUM ELECT 47UF
C908	1-127-956-21 s	CAP, CHIP FILM 0.1MF (3225)
C909	1-114-549-11 s	CAP, NIOBIUM ELECT 47UF
C910	1-118-046-11 s	CAP, CERAMIC 4.7MF X5R (2012)
C911	1-127-956-21 s	CAP, CHIP FILM 0.1MF (3225)
C912	1-127-956-21 s	CAP, CHIP FILM 0.1MF (3225)
C913	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C914	1-127-956-21 s	CAP, CHIP FILM 0.1MF (3225)
C915	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C916	1-127-950-21 s	CAP, CHIP FILM 0.01MF (2012)
C917	1-127-950-21 s	CAP, CHIP FILM 0.01MF (2012)
C918	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C919	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C920	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C921	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C922	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C923	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C924	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C925	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C926	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C927	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C928	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C929	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C930	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
CN200	1-774-261-31 s	CONNECTOR, FFC/FPC(ZIF) AN 24P
CN201	1-778-535-31 s	CONNECTOR, FFC/FPC(ZIF) AN 45P
CN600	1-764-243-31 o	CONNECTOR (COAXIAL)
CN700	1-770-627-21 s	PIN, CONNECTOR 10P
D100	8-719-083-60 s	DI UDZSUSTE-174.7B
D101	8-719-083-60 s	DI UDZSUSTE-174.7B
D201	6-502-197-01 s	DI SML-D12M8WT86SM
D202	8-719-083-60 s	DI UDZSUSTE-174.7B
D203	6-502-197-01 s	DI SML-D12M8WT86SM
D204	8-719-074-31 s	DIODE CL-196YG-CD-T
D400	8-719-074-31 s	DIODE CL-196YG-CD-T
D800	8-719-821-08 s	DIODE 1SS271-TE85L
D801	8-719-024-71 s	DIODE 1SS362-TE85L
D900	8-719-820-42 s	DIODE 1SS302-TE85L
D901	6-502-197-01 s	DI SML-D12M8WT86SM
D902	8-719-820-42 s	DIODE 1SS302-TE85L
D903	8-719-820-42 s	DIODE 1SS302-TE85L
D904	6-502-598-01 s	DI SML-D12U8WT86
E200	1-535-877-22 s	CHIP, CHECKER
E201	1-535-877-22 s	CHIP, CHECKER
E203	1-535-877-22 s	CHIP, CHECKER
E204	1-535-877-22 s	CHIP, CHECKER
E205	1-535-877-22 s	CHIP, CHECKER
E206	1-694-974-21 s	CONTACT TERMINAL
E207	1-694-974-21 s	CONTACT TERMINAL
FB100	1-414-772-21 s	FERRITE, EMI (SMD) (2012)
FB101	1-414-772-21 s	FERRITE, EMI (SMD) (2012)
FB103	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB104	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB105	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB106	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB107	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB108	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB109	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB110	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB111	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB112	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB113	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB114	1-414-864-21 s	FERRITE, EMI (SMD) (1608)

DPR-358 BOARD

Ref. No. or Q'ty	Part No.	SP Description
FB115	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB116	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB117	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB118	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB119	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB120	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB121	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB122	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB123	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB124	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB125	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB126	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB127	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB128	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB129	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB130	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB131	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB132	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB133	1-414-772-21 s	FERRITE, EMI (SMD) (2012)
FB134	1-414-772-21 s	FERRITE, EMI (SMD) (2012)
FB135	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB136	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB137	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB138	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB139	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB140	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB141	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB142	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB143	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB144	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB145	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB146	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB147	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB148	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB149	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB200	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB201	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB202	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB203	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB204	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB205	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB206	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB207	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB300	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB301	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB302	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB402	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB403	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB404	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB405	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB406	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB407	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB408	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB409	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB411	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB500	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB501	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB502	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB503	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB601	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB602	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB603	1-481-195-21 s	FERRITE, EMI (SMD)
FB604	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB605	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB606	1-481-195-21 s	FERRITE, EMI (SMD)

DPR-358 BOARD

Ref. No. or Q'ty	Part No.	SP Description
FB607	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB608	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB700	1-400-462-21 s	FERRITE, EMI (SMD) (1005)
FB701	1-400-462-21 s	FERRITE, EMI (SMD) (1005)
FB702	1-400-462-21 s	FERRITE, EMI (SMD) (1005)
FB703	1-400-462-21 s	FERRITE, EMI (SMD) (1005)
FB704	1-400-462-21 s	FERRITE, EMI (SMD) (1005)
FB705	1-400-462-21 s	FERRITE, EMI (SMD) (1005)
FB900	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB901	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FL201	1-813-542-11 s	FILTER, LOW PASS
FL202	1-813-542-11 s	FILTER, LOW PASS
FL203	1-813-542-11 s	FILTER, LOW PASS
IC100	6-713-169-01 s	IC LTC3412AEFE#TR
IC101	8-759-327-01 s	IC NJM062V (TE2)
IC102	6-713-169-01 s	IC LTC3412AEFE#TR
IC103	6-713-169-01 s	IC LTC3412AEFE#TR
IC104	6-704-976-01 s	IC ADR381ARTZ-REEL7
IC105	6-713-169-01 s	IC LTC3412AEFE#TR
IC106	8-759-327-01 s	IC NJM062V (TE2)
IC107	6-713-169-01 s	IC LTC3412AEFE#TR
IC112	6-701-946-01 s	IC R3112N271A-TR-FE
IC115	6-715-034-01 s	IC TC7SZ00FU, RSONYJ
IC116	6-715-039-01 s	IC TC7SZ08FU, RSONYJ
IC117	6-715-039-01 s	IC TC7SZ08FU, RSONYJ
IC120	6-715-041-01 s	IC TC7SZ125FU, RSOYJ
IC121	6-715-041-01 s	IC TC7SZ125FU, RSOYJ
IC122	6-711-485-01 s	IC TC74VCX125FK (EL)
IC123	6-711-485-01 s	IC TC74VCX125FK (EL)
IC124	8-759-327-01 s	IC NJM062V (TE2)
IC126	6-715-041-01 s	IC TC7SZ125FU, RSOYJ
IC127	6-711-116-01 s	IC NJM2878F3-05 (TE2)
IC200	6-711-915-01 s	IC LM73CIMK-0
IC201	6-707-849-01 s	IC TC74LCX244FT (EKJ)
IC202	6-706-863-01 s	IC LMH6732MFX/NOPB
IC203	6-716-650-01 s	IC AD8132ARMZ-REEL7
IC232	6-706-863-01 s	IC LMH6732MFX/NOPB
IC233	6-716-650-01 s	IC AD8132ARMZ-REEL7
IC261	6-716-650-01 s	IC AD8132ARMZ-REEL7
IC262	6-706-863-01 s	IC LMH6732MFX/NOPB
IC263	8-759-327-01 s	IC NJM062V (TE2)
IC264	8-759-327-01 s	IC NJM062V (TE2)
IC265	6-707-884-01 s	IC TC74VHCT04AFT (EKJ)
IC302	8-759-675-54 s	IC TC7W53FK (TE85R)
IC303	8-759-675-54 s	IC TC7W53FK (TE85R)
IC305	8-759-675-54 s	IC TC7W53FK (TE85R)
IC306	6-711-488-01 s	IC TC74VCX157FK (EL)
IC308	6-715-034-01 s	IC TC7SZ00FU, RSONYJ
IC400	6-704-238-01 s	IC S-812C30AUA-C2KT2G
IC401	6-707-855-01 s	IC TC74LCX574FT (EKJ)
IC402	6-715-039-01 s	IC TC7SZ08FU, RSONYJ
IC404	6-715-034-01 s	IC TC7SZ00FU, RSONYJ
IC501	6-714-608-01 s	IC TPS51200DRCR
IC504	6-710-243-01 s	IC SN74AVC1T45DCKR
IC505	6-710-243-01 s	IC SN74AVC1T45DCKR
IC600	8-759-831-52 s	IC TC7WH125FK
IC601	8-759-831-52 s	IC TC7WH125FK
IC603	8-759-680-48 s	IC TC7WH157FK
IC700	6-712-135-01 o	IC R1173H001D-T1-FE
IC701	6-715-039-01 s	IC TC7SZ08FU, RSONYJ
IC702	6-716-953-01 s	IC W25Q64CVSSIG
IC703	6-715-039-01 s	IC TC7SZ08FU, RSONYJ
IC800	6-718-382-01 s	IC ML86V76653TBZ0AAL
IC801	6-707-997-01 s	IC ADV7320KSTZ

DPR-358 BOARD

Ref. No. or Q'ty	Part No.	SP Description
IC802	8-759-561-46 s	IC AD8014ARTZ-REEL7
IC803	8-759-561-46 s	IC AD8014ARTZ-REEL7
IC804	8-759-561-46 s	IC AD8014ARTZ-REEL7
IC805	8-759-561-46 s	IC AD8014ARTZ-REEL7
IC808	8-759-327-01 s	IC NJM062V(TE2)
IC900	8-759-485-24 s	IC MC74HC4046ADTR2
IC901	8-759-485-24 s	IC MC74HC4046ADTR2
IC902	8-759-675-54 s	IC TC7W53FK (TE85R)
IC903	8-759-675-54 s	IC TC7W53FK (TE85R)
IC904	8-759-675-54 s	IC TC7W53FK (TE85R)
IC905	6-715-035-01 s	IC TC7SZ02FU, RSONYJ
IC906	8-759-675-47 s	IC SN74LVC04APWR
IC907	6-708-277-01 s	IC CDCVF25081PWR
IC910	6-706-478-01 s	IC TC7SET08FU
IC911	6-706-478-01 s	IC TC7SET08FU
IC912	6-706-478-01 s	IC TC7SET08FU
IC913	6-706-478-01 s	IC TC7SET08FU
IC914	8-759-669-66 s	IC TLC272CPWR-12
IC915	8-759-669-66 s	IC TLC272CPWR-12
IC917	6-715-034-01 s	IC TC7SZ00FU, RSONYJ
IC918	6-715-034-01 s	IC TC7SZ00FU, RSONYJ
IC2004	6-715-039-01 s	IC TC7SZ08FU, RSONYJ
IC2007	8-759-683-80 s	IC SN65LVDS1DBVR
IC2008	8-759-683-80 s	IC SN65LVDS1DBVR
IC2012	8-759-683-80 s	IC SN65LVDS1DBVR
IC2015	8-759-831-52 s	IC TC7WH125FK
IC2016	8-759-831-52 s	IC TC7WH125FK
IC2017	8-759-831-52 s	IC TC7WH125FK
IC2018	8-759-831-52 s	IC TC7WH125FK
IC2020	6-710-786-01 s	IC TC7SH125FU
IC2021	6-706-484-01 s	IC TC7SH04FU
JC400	1-218-990-81 s	CONDUCTOR, CHIP (1005)
JC500	1-218-990-81 s	CONDUCTOR, CHIP (1005)
L100	1-457-372-21 s	COIL, CHOKE 1UH
L101	1-457-372-21 s	COIL, CHOKE 1UH
L102	1-457-372-21 s	COIL, CHOKE 1UH
L103	1-400-135-21 s	INDUCTOR 1UH (2012)
L104	1-400-135-21 s	INDUCTOR 1UH (2012)
L105	1-400-135-21 s	INDUCTOR 1UH (2012)
L106	1-469-757-21 s	INDUCTOR 10UH (2012)
L107	1-469-757-21 s	INDUCTOR 10UH (2012)
L108	1-457-372-21 s	COIL, CHOKE 1UH
L109	1-457-372-21 s	COIL, CHOKE 1UH
L200	1-469-757-21 s	INDUCTOR 10UH (2012)
L300	1-469-757-21 s	INDUCTOR 10UH (2012)
L301	1-469-757-21 s	INDUCTOR 10UH (2012)
L302	1-469-757-21 s	INDUCTOR 10UH (2012)
L303	1-469-757-21 s	INDUCTOR 10UH (2012)
L304	1-469-757-21 s	INDUCTOR 10UH (2012)
L305	1-469-757-21 s	INDUCTOR 10UH (2012)
L306	1-469-757-21 s	INDUCTOR 10UH (2012)
L307	1-469-757-21 s	INDUCTOR 10UH (2012)
L308	1-469-757-21 s	INDUCTOR 10UH (2012)
L309	1-469-757-21 s	INDUCTOR 10UH (2012)
L600	1-414-837-21 s	INDUCTOR, CHIP 5.6NH (1005)
L601	1-414-837-21 s	INDUCTOR, CHIP 5.6NH (1005)
L800	1-469-555-21 s	INDUCTOR, CHIP 10UH (LB2016)
L801	1-469-555-21 s	INDUCTOR, CHIP 10UH (LB2016)
L802	1-469-555-21 s	INDUCTOR, CHIP 10UH (LB2016)
L803	1-469-555-21 s	INDUCTOR, CHIP 10UH (LB2016)
L804	1-469-555-21 s	INDUCTOR, CHIP 10UH (LB2016)
L805	1-469-555-21 s	INDUCTOR, CHIP 10UH (LB2016)
L806	1-481-589-21 s	INDUCTOR, CHIP 10UH
L807	1-481-577-21 s	INDUCTOR, CHIP 1.0UH

DPR-358 BOARD

Ref. No. or Q'ty	Part No.	SP Description
L808	1-481-577-21 s	INDUCTOR, CHIP 1.0UH
L809	1-481-577-21 s	INDUCTOR, CHIP 1.0UH
L810	1-469-555-21 s	INDUCTOR, CHIP 10UH (LB2016)
L811	1-469-555-21 s	INDUCTOR, CHIP 10UH (LB2016)
L812	1-469-555-21 s	INDUCTOR, CHIP 10UH (LB2016)
L813	1-469-555-21 s	INDUCTOR, CHIP 10UH (LB2016)
L814	1-469-555-21 s	INDUCTOR, CHIP 10UH (LB2016)
L815	1-469-555-21 s	INDUCTOR, CHIP 10UH (LB2016)
L816	1-469-555-21 s	INDUCTOR, CHIP 10UH (LB2016)
L817	1-469-555-21 s	INDUCTOR, CHIP 10UH (LB2016)
L818	1-469-757-21 s	INDUCTOR 10UH (2012)
L819	1-469-757-21 s	INDUCTOR 10UH (2012)
L900	1-469-555-21 s	INDUCTOR, CHIP 10UH (LB2016)
L901	1-469-555-21 s	INDUCTOR, CHIP 10UH (LB2016)
L902	1-469-555-21 s	INDUCTOR, CHIP 10UH (LB2016)
L903	1-469-555-21 s	INDUCTOR, CHIP 10UH (LB2016)
L904	1-469-555-21 s	INDUCTOR, CHIP 10UH (LB2016)
L905	1-469-555-21 s	INDUCTOR, CHIP 10UH (LB2016)
L906	1-469-555-21 s	INDUCTOR, CHIP 10UH (LB2016)
L907	1-469-555-21 s	INDUCTOR, CHIP 10UH (LB2016)
L908	1-469-555-21 s	INDUCTOR, CHIP 10UH (LB2016)
L909	1-469-555-21 s	INDUCTOR, CHIP 10UH (LB2016)
Q100	6-550-631-01 s	TRANSISTOR 2SA1797-T100-Q
Q101	6-550-632-01 s	TRANSISTOR 2SC4672-T100-Q
Q102	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q103	6-550-631-01 s	TRANSISTOR 2SA1797-T100-Q
Q104	6-550-631-01 s	TRANSISTOR 2SA1797-T100-Q
Q105	8-729-928-05 s	TRANSISTOR 2SC4617TL-QR
Q106	8-729-928-05 s	TRANSISTOR 2SC4617TL-QR
Q107	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q202	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q203	6-550-631-01 s	TRANSISTOR 2SA1797-T100-Q
Q800	8-729-928-05 s	TRANSISTOR 2SC4617TL-QR
Q900	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q901	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q902	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q903	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q904	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q905	8-729-928-25 s	TRANSISTOR 2SA1774TL-QR
Q906	8-729-928-25 s	TRANSISTOR 2SA1774TL-QR
Q907	8-729-928-25 s	TRANSISTOR 2SA1774TL-QR
Q908	8-729-928-25 s	TRANSISTOR 2SA1774TL-QR
Q909	8-729-928-25 s	TRANSISTOR 2SA1774TL-QR
Q910	8-729-928-05 s	TRANSISTOR 2SC4617TL-QR
R101	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R103	1-250-511-11 o	RES, METAL FILM CHIP 4.7K(1005)
R105	1-250-511-11 o	RES, METAL FILM CHIP 4.7K(1005)
R106	1-250-491-11 o	RES, METAL FILM CHIP 680(1005)
R107	1-250-521-11 s	RES, METAL FILM CHIP 12K(1005)
R108	1-250-543-11 o	RES, METAL FILM CHIP 100K(1005)
R109	1-250-543-11 o	RES, METAL FILM CHIP 100K(1005)
R110	1-250-523-11 o	RES, METAL FILM CHIP 15K(1005)
R111	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R112	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R113	1-250-551-11 s	RES, METAL FILM CHIP 220K(1005)
R114	1-250-543-11 o	RES, METAL FILM CHIP 100K(1005)
R115	1-250-551-11 s	RES, METAL FILM CHIP 220K(1005)
R116	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R117	1-243-975-81 s	RES, CHIP 4.7M (1005)
R118	1-243-975-81 s	RES, CHIP 4.7M (1005)
R119	1-250-479-11 o	RES, METAL FILM CHIP 220(1005)
R120	1-250-479-11 o	RES, METAL FILM CHIP 220(1005)
R121	1-243-975-81 s	RES, CHIP 4.7M (1005)
R122	1-243-975-81 s	RES, CHIP 4.7M (1005)

DPR-358 BOARD

Ref. No. or Q'ty	Part No.	SP Description
R123	1-250-551-11 s	RES,METAL FILM CHIP 220K(1005)
R124	1-243-975-81 s	RES, CHIP 4.7M (1005)
R125	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R126	1-243-975-81 s	RES, CHIP 4.7M (1005)
R127	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R128	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R129	1-250-531-11 s	RES, METAL FILM CHIP 33K(1005)
R130	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R131	1-250-531-11 s	RES, METAL FILM CHIP 33K(1005)
R132	1-250-531-11 s	RES, METAL FILM CHIP 33K(1005)
R133	1-250-507-11 o	RES,METAL FILM CHIP 3.3K(1005)
R134	1-250-539-11 o	RES, METAL FILM CHIP 68K(1005)
R135	1-250-539-11 o	RES, METAL FILM CHIP 68K(1005)
R136	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R137	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R138	1-220-230-91 s	RES,SQUARE TYPE CHIP 2.2(3225)
R139	1-220-230-91 s	RES,SQUARE TYPE CHIP 2.2(3225)
R140	1-220-230-91 s	RES,SQUARE TYPE CHIP 2.2(3225)
R141	1-242-967-81 s	RES, CHIP 1.0 (1005)
R142	1-242-967-81 s	RES, CHIP 1.0 (1005)
R143	1-242-967-81 s	RES, CHIP 1.0 (1005)
R144	1-242-967-81 s	RES, CHIP 1.0 (1005)
R145	1-211-737-91 s	RES,SQUARE TYPE CHIP 0.47 3225
R146	1-211-737-91 s	RES,SQUARE TYPE CHIP 0.47 3225
R147	1-216-809-91 s	RES, CHIP 100 (1608)
R148	1-216-809-91 s	RES, CHIP 100 (1608)
R149	1-216-809-91 s	RES, CHIP 100 (1608)
R150	1-216-809-91 s	RES, CHIP 100 (1608)
R151	1-250-479-11 o	RES, METAL FILM CHIP 220(1005)
R152	1-250-479-11 o	RES, METAL FILM CHIP 220(1005)
R154	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R156	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R157	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R158	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R159	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R160	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R161	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R162	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R163	1-250-551-11 s	RES,METAL FILM CHIP 220K(1005)
R164	1-250-551-11 s	RES,METAL FILM CHIP 220K(1005)
R165	1-243-975-81 s	RES, CHIP 4.7M (1005)
R166	1-243-975-81 s	RES, CHIP 4.7M (1005)
R167	1-243-975-81 s	RES, CHIP 4.7M (1005)
R168	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R169	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R170	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R171	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R172	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R173	1-243-975-81 s	RES, CHIP 4.7M (1005)
R174	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R175	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R176	1-250-523-11 o	RES, METAL FILM CHIP 15K(1005)
R177	1-250-515-11 s	RES,METAL FILM CHIP 6.8K(1005)
R178	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R179	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R180	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R181	1-250-489-11 o	RES, METAL FILM CHIP 560(1005)
R182	1-250-487-11 s	RES, METAL FILM CHIP 470(1005)
R183	1-220-230-91 s	RES,SQUARE TYPE CHIP 2.2(3225)
R184	1-220-230-91 s	RES,SQUARE TYPE CHIP 2.2(3225)
R185	1-216-295-91 s	CONDUCTOR, CHIP (2012)
R201	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R202	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R203	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R204	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)

DPR-358 BOARD

Ref. No. or Q'ty	Part No.	SP Description
R211	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R212	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R213	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R214	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R215	1-250-479-11 o	RES, METAL FILM CHIP 220(1005)
R218	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R219	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R220	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R221	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R222	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R223	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R224	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R225	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R226	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R227	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R232	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R233	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R234	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R235	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R236	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R237	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R238	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R239	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R240	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R241	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R242	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R243	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R244	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R245	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R250	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R251	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R252	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R253	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R254	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R257	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R258	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R259	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R260	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R261	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R262	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R265	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R266	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R269	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R270	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R271	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R272	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R273	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R274	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R275	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R276	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R277	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R300	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R301	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R302	1-250-491-11 o	RES, METAL FILM CHIP 680(1005)
R303	1-250-491-11 o	RES, METAL FILM CHIP 680(1005)
R304	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R305	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R306	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R307	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R308	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R309	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R310	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R311	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R312	1-250-491-11 o	RES, METAL FILM CHIP 680(1005)
R313	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)

DPR-358 BOARD

Ref. No. or Q'ty	Part No.	SP Description
R600	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R601	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R602	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R603	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R604	1-250-471-11 s	RES, METAL FILM CHIP 100 (1005)
R605	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R606	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R609	1-208-856-81 s	RES, CHIP 51 (1005)
R610	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R611	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R612	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R613	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R614	1-208-856-81 s	RES, CHIP 51 (1005)
R615	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R616	1-250-491-11 o	RES, METAL FILM CHIP 680 (1005)
R617	1-250-495-11 s	RES, METAL FILM CHIP 1.0K (1005)
R618	1-250-519-11 s	RES, METAL FILM CHIP 10K (1005)
R620	1-250-468-11 s	RES, METAL FILM CHIP 75 (1005)
R621	1-250-468-11 s	RES, METAL FILM CHIP 75 (1005)
R622	1-250-468-11 s	RES, METAL FILM CHIP 75 (1005)
R623	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R624	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R625	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R626	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R627	1-250-495-11 s	RES, METAL FILM CHIP 1.0K (1005)
R628	1-250-468-11 s	RES, METAL FILM CHIP 75 (1005)
R629	1-250-468-11 s	RES, METAL FILM CHIP 75 (1005)
R630	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R631	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R700	1-250-519-11 s	RES, METAL FILM CHIP 10K (1005)
R701	1-250-479-11 o	RES, METAL FILM CHIP 220 (1005)
R702	1-250-503-11 o	RES, METAL FILM CHIP 2.2K (1005)
R703	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R704	1-250-519-11 s	RES, METAL FILM CHIP 10K (1005)
R705	1-250-519-11 s	RES, METAL FILM CHIP 10K (1005)
R706	1-250-519-11 s	RES, METAL FILM CHIP 10K (1005)
R707	1-250-519-11 s	RES, METAL FILM CHIP 10K (1005)
R708	1-250-519-11 s	RES, METAL FILM CHIP 10K (1005)
R709	1-250-519-11 s	RES, METAL FILM CHIP 10K (1005)
R710	1-250-519-11 s	RES, METAL FILM CHIP 10K (1005)
R711	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R712	1-250-519-11 s	RES, METAL FILM CHIP 10K (1005)
R713	1-250-519-11 s	RES, METAL FILM CHIP 10K (1005)
R714	1-250-495-11 s	RES, METAL FILM CHIP 1.0K (1005)
R715	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R716	1-250-519-11 s	RES, METAL FILM CHIP 10K (1005)
R717	1-250-495-11 s	RES, METAL FILM CHIP 1.0K (1005)
R718	1-250-495-11 s	RES, METAL FILM CHIP 1.0K (1005)
R719	1-250-519-11 s	RES, METAL FILM CHIP 10K (1005)
R720	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R721	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R722	1-250-471-11 s	RES, METAL FILM CHIP 100 (1005)
R723	1-250-471-11 s	RES, METAL FILM CHIP 100 (1005)
R724	1-250-471-11 s	RES, METAL FILM CHIP 100 (1005)
R725	1-250-471-11 s	RES, METAL FILM CHIP 100 (1005)
R726	1-250-471-11 s	RES, METAL FILM CHIP 100 (1005)
R727	1-250-495-11 s	RES, METAL FILM CHIP 1.0K (1005)
R801	1-250-495-11 s	RES, METAL FILM CHIP 1.0K (1005)
R802	1-250-559-11 o	RES, METAL FILM CHIP 470K (1005)
R803	1-250-515-11 s	RES, METAL FILM CHIP 6.8K (1005)
R804	1-250-547-11 s	RES, METAL FILM CHIP 150K (1005)
R805	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R806	1-250-531-11 s	RES, METAL FILM CHIP 33K (1005)
R807	1-250-475-11 s	RES, METAL FILM CHIP 150 (1005)
R808	1-250-471-11 s	RES, METAL FILM CHIP 100 (1005)

DPR-358 BOARD

Ref. No. or Q'ty	Part No.	SP Description
R811	1-250-519-11 s	RES, METAL FILM CHIP 10K (1005)
R812	1-250-515-11 s	RES, METAL FILM CHIP 6.8K (1005)
R813	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R814	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R815	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R816	1-250-471-11 s	RES, METAL FILM CHIP 100 (1005)
R817	1-250-471-11 s	RES, METAL FILM CHIP 100 (1005)
R818	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R819	1-250-519-11 s	RES, METAL FILM CHIP 10K (1005)
R820	1-250-519-11 s	RES, METAL FILM CHIP 10K (1005)
R821	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R822	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R823	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R824	1-250-471-11 s	RES, METAL FILM CHIP 100 (1005)
R825	1-250-471-11 s	RES, METAL FILM CHIP 100 (1005)
R826	1-250-471-11 s	RES, METAL FILM CHIP 100 (1005)
R827	1-250-511-11 o	RES, METAL FILM CHIP 4.7K (1005)
R828	1-250-511-11 o	RES, METAL FILM CHIP 4.7K (1005)
R829	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R830	1-250-543-11 o	RES, METAL FILM CHIP 100K (1005)
R831	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R832	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R833	1-250-503-11 o	RES, METAL FILM CHIP 2.2K (1005)
R834	1-250-503-11 o	RES, METAL FILM CHIP 2.2K (1005)
R835	1-250-511-11 o	RES, METAL FILM CHIP 4.7K (1005)
R836	1-250-495-11 s	RES, METAL FILM CHIP 1.0K (1005)
R837	1-250-495-11 s	RES, METAL FILM CHIP 1.0K (1005)
R838	1-250-511-11 o	RES, METAL FILM CHIP 4.7K (1005)
R839	1-250-491-11 o	RES, METAL FILM CHIP 680 (1005)
R840	1-250-491-11 o	RES, METAL FILM CHIP 680 (1005)
R841	1-250-487-11 s	RES, METAL FILM CHIP 470 (1005)
R842	1-250-487-11 s	RES, METAL FILM CHIP 470 (1005)
R843	1-250-487-11 s	RES, METAL FILM CHIP 470 (1005)
R844	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R845	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R846	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R847	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R848	1-250-467-11 s	RES, METAL FILM CHIP 68 (1005)
R849	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R850	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R851	1-250-471-11 s	RES, METAL FILM CHIP 100 (1005)
R852	1-250-487-11 s	RES, METAL FILM CHIP 470 (1005)
R853	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R854	1-250-491-11 o	RES, METAL FILM CHIP 680 (1005)
R855	1-250-471-11 s	RES, METAL FILM CHIP 100 (1005)
R856	1-250-491-11 o	RES, METAL FILM CHIP 680 (1005)
R857	1-250-471-11 s	RES, METAL FILM CHIP 100 (1005)
R858	1-250-491-11 o	RES, METAL FILM CHIP 680 (1005)
R859	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R860	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R861	1-250-519-11 s	RES, METAL FILM CHIP 10K (1005)
R862	1-250-495-11 s	RES, METAL FILM CHIP 1.0K (1005)
R863	1-250-487-11 s	RES, METAL FILM CHIP 470 (1005)
R864	1-250-511-11 o	RES, METAL FILM CHIP 4.7K (1005)
R865	1-250-499-11 o	RES, METAL FILM CHIP 1.5K (1005)
R866	1-250-487-11 s	RES, METAL FILM CHIP 470 (1005)
R867	1-250-511-11 o	RES, METAL FILM CHIP 4.7K (1005)
R868	1-250-499-11 o	RES, METAL FILM CHIP 1.5K (1005)
R869	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R870	1-250-519-11 s	RES, METAL FILM CHIP 10K (1005)
R871	1-250-495-11 s	RES, METAL FILM CHIP 1.0K (1005)
R872	1-250-479-11 o	RES, METAL FILM CHIP 220 (1005)
R873	1-250-491-11 o	RES, METAL FILM CHIP 680 (1005)
R874	1-250-491-11 o	RES, METAL FILM CHIP 680 (1005)
R875	1-250-491-11 o	RES, METAL FILM CHIP 680 (1005)

DPR-358 BOARD

Ref. No. or Q'ty	Part No.	SP Description
R876	1-250-491-11 o	RES, METAL FILM CHIP 680(1005)
R877	1-250-491-11 o	RES, METAL FILM CHIP 680(1005)
R878	1-250-491-11 o	RES, METAL FILM CHIP 680(1005)
R879	1-250-491-11 o	RES, METAL FILM CHIP 680(1005)
R880	1-250-491-11 o	RES, METAL FILM CHIP 680(1005)
R881	1-250-491-11 o	RES, METAL FILM CHIP 680(1005)
R882	1-250-491-11 o	RES, METAL FILM CHIP 680(1005)
R883	1-250-479-11 o	RES, METAL FILM CHIP 220(1005)
R884	1-250-491-11 o	RES, METAL FILM CHIP 680(1005)
R885	1-250-479-11 o	RES, METAL FILM CHIP 220(1005)
R886	1-250-479-11 o	RES, METAL FILM CHIP 220(1005)
R887	1-250-479-11 o	RES, METAL FILM CHIP 220(1005)
R888	1-250-479-11 o	RES, METAL FILM CHIP 220(1005)
R889	1-250-479-11 o	RES, METAL FILM CHIP 220(1005)
R890	1-250-479-11 o	RES, METAL FILM CHIP 220(1005)
R891	1-250-479-11 o	RES, METAL FILM CHIP 220(1005)
R892	1-250-479-11 o	RES, METAL FILM CHIP 220(1005)
R893	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R894	1-250-483-11 s	RES, METAL FILM CHIP 330(1005)
R895	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R896	1-250-467-11 s	RES, METAL FILM CHIP 68 (1005)
R897	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R900	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R901	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R902	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R903	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R904	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R905	1-250-479-11 o	RES, METAL FILM CHIP 220(1005)
R906	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R907	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R908	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R909	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R910	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R911	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R912	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R913	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R914	1-250-487-11 s	RES, METAL FILM CHIP 470(1005)
R915	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R916	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R917	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R918	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R919	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R920	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R921	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R922	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R924	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R925	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R926	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R927	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R928	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R929	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R931	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R932	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R933	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R934	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R935	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R936	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R937	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R938	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R939	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R940	1-250-567-11 s	RES, METAL FILM CHIP 1M (1005)
R941	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R942	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R943	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R945	1-250-487-11 s	RES, METAL FILM CHIP 470(1005)

DPR-358 BOARD

Ref. No. or Q'ty	Part No.	SP Description
R946	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R947	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R948	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R950	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R951	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R952	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R953	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R954	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R955	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R956	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R957	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R958	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R959	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R960	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R961	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R962	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R963	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
RB113	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB121	1-234-380-21 s	RES, NETWORK 47K (1005X4)
RB200	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB202	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB203	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB204	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB205	1-234-380-21 s	RES, NETWORK 47K (1005X4)
RB206	1-234-380-21 s	RES, NETWORK 47K (1005X4)
RB207	1-234-380-21 s	RES, NETWORK 47K (1005X4)
RB208	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB209	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB210	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB211	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB212	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB334	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB337	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB338	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB339	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB341	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB345	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB346	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB347	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB348	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB353	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB354	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB355	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB400	1-234-380-21 s	RES, NETWORK 47K (1005X4)
RB401	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB402	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB403	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB404	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB405	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB406	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB409	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB410	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB411	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB412	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB413	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB414	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB415	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB416	1-234-373-21 s	RES, NETWORK 220 (1005X4)
RB417	1-234-373-21 s	RES, NETWORK 220 (1005X4)
RB418	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB419	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB420	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB434	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB500	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB501	1-234-371-21 s	RES, NETWORK 47 (1005X4)

DPR-358 BOARD**Ref. No.****or Q'ty Part No. SP Description**

RB502	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB503	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB506	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB507	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB508	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB509	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB514	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB600	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB601	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB602	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB603	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB604	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB605	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB606	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB607	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB608	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB609	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB610	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB611	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB612	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB700	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB701	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB703	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB704	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB705	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB706	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB800	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB801	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB802	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB803	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB804	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB805	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB806	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB807	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB808	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB809	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB810	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB811	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB900	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB901	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB907	1-234-371-21	s	RES, NETWORK 47 (1005X4)
TP201	1-535-877-22	s	CHIP, CHECKER
TP202	1-535-877-22	s	CHIP, CHECKER
TP400	1-535-877-22	s	CHIP, CHECKER
TP401	1-535-877-22	s	CHIP, CHECKER
TP402	1-535-877-22	s	CHIP, CHECKER
TP403	1-535-877-22	s	CHIP, CHECKER
TP800	1-535-877-22	s	CHIP, CHECKER
TP801	1-535-877-22	s	CHIP, CHECKER
TP802	1-535-877-22	s	CHIP, CHECKER
TP803	1-535-877-22	s	CHIP, CHECKER
TP804	1-535-877-22	s	CHIP, CHECKER
TP805	1-535-877-22	s	CHIP, CHECKER
TP900	1-535-877-22	s	CHIP, CHECKER
TP901	1-535-877-22	s	CHIP, CHECKER
X900	1-795-670-12	s	OSCILLATOR, CRYSTAL (VCXO) 3.3V
X901	1-795-671-12	s	OSCILLATOR, CRYSTAL (VCXO) 3.3V
X902	1-795-764-12	s	OSCILLATOR, CRYSTAL (VCXO) 5V

DR-675 BOARD**Ref. No.****or Q'ty Part No. SP Description**

1pc	A-1969-520-A	s	MOUNTED CIRCUIT BOARD, DR-675
C001	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C002	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B (3225)
C003	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C004	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C005	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C006	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C007	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C008	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C009	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C010	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C011	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C012	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C013	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C014	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C015	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C016	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C017	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C018	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C019	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C020	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C021	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C022	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C023	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C024	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C025	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C026	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C027	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C032	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C033	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C034	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C039	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C040	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C041	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C042	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C043	1-112-298-91	s	CAP, CERAMIC 1MF B (1608)
C044	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C045	1-114-386-11	s	CAP, NIOBIUM ELECT 100MF 105
C046	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C047	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C052	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C053	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C054	1-112-916-11	s	CAP, NIOBIUM ELECT 47MF 105
C055	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C056	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C057	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C058	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C059	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C060	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C062	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C063	1-112-916-11	s	CAP, NIOBIUM ELECT 47MF 105
C064	1-112-916-11	s	CAP, NIOBIUM ELECT 47MF 105
C065	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C066	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C067	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C068	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C069	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
CN002	1-778-451-31	s	CONNECTOR, FFC/FPC(ZIF) AN 50P
CN003	1-778-451-31	s	CONNECTOR, FFC/FPC(ZIF) AN 50P
CN004	1-778-451-31	s	CONNECTOR, FFC/FPC(ZIF) AN 50P
CN005	1-782-954-11	o	CONNECTOR, BOARD TO BOARD 100P
D001	8-719-069-28	s	DI 1SS400FJTE61
D002	8-719-069-28	s	DI 1SS400FJTE61

DR-675 BOARD

Ref. No. or Q'ty	Part No.	SP Description
D003	6-503-494-01 s	DI DA6J101K0R
D004	6-503-494-01 s	DI DA6J101K0R
D005	6-503-494-01 s	DI DA6J101K0R
D006	6-503-494-01 s	DI DA6J101K0R
D007	6-503-494-01 s	DI DA6J101K0R
D008	6-503-494-01 s	DI DA6J101K0R
D009	8-719-083-60 s	DI UDZSUSTE-174.7B
D010	8-719-083-60 s	DI UDZSUSTE-174.7B
ET001	1-780-627-11 s	TERMINAL, LUG
ET002	1-780-627-11 s	TERMINAL, LUG
ET003	1-780-627-11 s	TERMINAL, LUG
FB001	1-469-100-21 s	FERRITE, EMI (SMD) (1608)
FB002	1-469-100-21 s	FERRITE, EMI (SMD) (1608)
FB003	1-469-100-21 s	FERRITE, EMI (SMD) (1608)
FB004	1-469-100-21 s	FERRITE, EMI (SMD) (1608)
FB005	1-469-100-21 s	FERRITE, EMI (SMD) (1608)
FB006	1-469-100-21 s	FERRITE, EMI (SMD) (1608)
FB007	1-469-100-21 s	FERRITE, EMI (SMD) (1608)
FB008	1-469-100-21 s	FERRITE, EMI (SMD) (1608)
FB009	1-469-100-21 s	FERRITE, EMI (SMD) (1608)
FB010	1-469-100-21 s	FERRITE, EMI (SMD) (1608)
FB011	1-469-100-21 s	FERRITE, EMI (SMD) (1608)
FB012	1-469-100-21 s	FERRITE, EMI (SMD) (1608)
FB013	1-469-100-21 s	FERRITE, EMI (SMD) (1608)
FB014	1-469-100-21 s	FERRITE, EMI (SMD) (1608)
FB015	1-469-100-21 s	FERRITE, EMI (SMD) (1608)
FB016	1-469-100-21 s	FERRITE, EMI (SMD) (1608)
FB017	1-469-100-21 s	FERRITE, EMI (SMD) (1608)
FB018	1-469-100-21 s	FERRITE, EMI (SMD) (1608)
FB019	1-469-100-21 s	FERRITE, EMI (SMD) (1608)
FB020	1-469-100-21 s	FERRITE, EMI (SMD) (1608)
IC001	8-759-573-97 s	IC SN74LVC541APWR
IC002	8-759-573-97 s	IC SN74LVC541APWR
IC003	6-708-326-01 s	IC TC74HCT4053AFT (EL)
IC004	8-759-672-76 s	IC AK9813BF-E2
IC005	6-700-439-01 s	IC SN74ALVC00PWR
IC006	6-700-439-01 s	IC SN74ALVC00PWR
IC007	6-700-439-01 s	IC SN74ALVC00PWR
IC008	6-711-375-01 s	IC LT1964ES5-BYP#TR
IC009	6-711-375-01 s	IC LT1964ES5-BYP#TR
IC010	8-759-327-01 s	IC NJM062V (TE2)
IC011	6-700-439-01 s	IC SN74ALVC00PWR
IC012	6-700-439-01 s	IC SN74ALVC00PWR
IC013	6-700-439-01 s	IC SN74ALVC00PWR
IC014	6-700-439-01 s	IC SN74ALVC00PWR
IC015	6-700-439-01 s	IC SN74ALVC00PWR
IC016	6-704-976-01 s	IC ADR381ARTZ-REEL7
IC017	6-715-039-01 s	IC TC7SZ08FU, RSONYJ
IC018	6-708-326-01 s	IC TC74HCT4053AFT (EL)
Q001	8-729-928-05 s	TRANSISTOR 2SC4617TL-QR
Q002	8-729-928-05 s	TRANSISTOR 2SC4617TL-QR
Q003	8-729-928-25 s	TRANSISTOR 2SA1774TL-QR
Q004	8-729-928-05 s	TRANSISTOR 2SC4617TL-QR
Q005	8-729-928-05 s	TRANSISTOR 2SC4617TL-QR
Q006	8-729-928-25 s	TRANSISTOR 2SA1774TL-QR
Q007	8-729-053-11 s	TRANSISTOR FDC6561AN
Q008	8-729-053-12 s	TRANSISTOR FDC6506P
Q009	8-729-053-11 s	TRANSISTOR FDC6561AN
Q010	8-729-053-12 s	TRANSISTOR FDC6506P
Q011	8-729-053-11 s	TRANSISTOR FDC6561AN
Q012	8-729-053-12 s	TRANSISTOR FDC6506P
Q013	8-729-053-11 s	TRANSISTOR FDC6561AN
Q014	8-729-053-12 s	TRANSISTOR FDC6506P
Q015	8-729-053-11 s	TRANSISTOR FDC6561AN

DR-675 BOARD

Ref. No. or Q'ty	Part No.	SP Description
Q016	8-729-053-12 s	TRANSISTOR FDC6506P
Q017	6-550-631-01 s	TRANSISTOR 2SA1797-T100-Q
Q018	6-550-631-01 s	TRANSISTOR 2SA1797-T100-Q
R001	1-250-503-11 o	RES, METAL FILM CHIP 2.2K (1005)
R002	1-250-503-11 o	RES, METAL FILM CHIP 2.2K (1005)
R003	1-250-503-11 o	RES, METAL FILM CHIP 2.2K (1005)
R004	1-216-797-91 s	RES, CHIP 10 (1608)
R005	1-216-797-91 s	RES, CHIP 10 (1608)
R006	1-216-797-91 s	RES, CHIP 10 (1608)
R007	1-216-797-91 s	RES, CHIP 10 (1608)
R008	1-250-471-11 s	RES, METAL FILM CHIP 100 (1005)
R009	1-250-471-11 s	RES, METAL FILM CHIP 100 (1005)
R010	1-250-471-11 s	RES, METAL FILM CHIP 100 (1005)
R011	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R012	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R013	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R014	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R015	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R016	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R017	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R018	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R019	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R020	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R021	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R022	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R023	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R024	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R025	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R026	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R027	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R028	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R029	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R030	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R031	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R032	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R033	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R034	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R035	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R036	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R037	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R038	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R039	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R040	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R041	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R042	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R043	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R044	1-250-535-11 s	RES, METAL FILM CHIP 47K (1005)
R045	1-250-519-11 s	RES, METAL FILM CHIP 10K (1005)
R046	1-250-527-11 o	RES, METAL FILM CHIP 22K (1005)
R047	1-250-519-11 s	RES, METAL FILM CHIP 10K (1005)
R049	1-250-543-11 o	RES, METAL FILM CHIP 100K (1005)
R051	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R052	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R053	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R054	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R055	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R056	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R057	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R058	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R059	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R060	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R061	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R062	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R063	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R064	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)

DR-675 BOARD

Ref. No. or Q'ty	Part No.	SP Description
R065	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R066	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R067	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R068	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R069	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R070	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R071	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R072	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R073	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R074	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R075	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R076	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R077	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R078	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R079	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R080	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R081	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R082	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R083	1-250-531-11 s	RES, METAL FILM CHIP 33K(1005)
R084	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R085	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R086	1-250-483-11 s	RES, METAL FILM CHIP 330(1005)
R087	1-250-531-11 s	RES, METAL FILM CHIP 33K(1005)
R088	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R089	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R090	1-250-483-11 s	RES, METAL FILM CHIP 330(1005)
R091	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R092	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R093	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R094	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R095	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R096	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R097	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R100	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R101	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R102	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R103	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R104	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
RB001	1-234-381-21 s	RES, NETWORK 100K (1005X4)
RB002	1-234-381-21 s	RES, NETWORK 100K (1005X4)
RB003	1-234-381-21 s	RES, NETWORK 100K (1005X4)
RB004	1-234-381-21 s	RES, NETWORK 100K (1005X4)

FL-377 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1969-373-A s	MOUNTED CIRCUIT BOARD, FL-377
2pcs	3-315-760-01 s	SPACER (B)
C001	△ 1-113-925-51 s	CAP, CERAMIC 10000PF F
C002	△ 1-136-206-11 s	CAP, METALIZED FILM 0.033MF
C003	△ 1-136-206-11 s	CAP, METALIZED FILM 0.033MF
C004	△ 1-136-206-11 s	CAP, METALIZED FILM 0.033MF
C005	△ 1-136-200-11 s	CAP, METALIZED FILM 0.15MF
CN001	△ 1-691-961-11 s	PIN, CONNECTOR (PC BOARD) 3P
CN002	△ 1-750-880-11 s	RECEPTACLE, COAXIAL CONNECTOR
CN003	1-691-961-11 s	PIN, CONNECTOR (PC BOARD) 3P
FB001	1-469-979-21 s	INDUCTOR, FERRITE BEAD
FB002	1-469-979-21 s	INDUCTOR, FERRITE BEAD
FB003	1-469-979-21 s	INDUCTOR, FERRITE BEAD
FB004	1-469-979-21 s	INDUCTOR, FERRITE BEAD

FL-377 BOARD

Ref. No. or Q'ty	Part No.	SP Description
FB005	1-469-979-21 s	INDUCTOR, FERRITE BEAD
FB006	1-469-979-21 s	INDUCTOR, FERRITE BEAD
L001	1-410-283-11 s	INDUCTOR (WITH CORE)
L002	1-410-283-11 s	INDUCTOR (WITH CORE)
L003	1-481-601-21 s	INDUCTOR, CHIP 100UH
L004	1-481-601-21 s	INDUCTOR, CHIP 100UH
L005	1-416-831-11 s	COIL, CHOKE 100UH
L006	1-416-831-11 s	COIL, CHOKE 100UH
L007	1-416-831-11 s	COIL, CHOKE 100UH
L008	1-416-831-11 s	COIL, CHOKE 100UH
L009	1-416-831-11 s	COIL, CHOKE 100UH
TP001	1-780-925-11 s	TERMINAL, LUG
TP002	1-780-925-11 s	TERMINAL, LUG

LE-392 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1946-171-A s	MOUNTED CIRCUIT BOARD, LE-392
C1	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C2	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
CN1	1-785-900-21 s	CONNECTOR 5P
CN2	1-785-946-21 s	CONNECTOR 3P
D1	6-502-598-01 s	DI SML-D12U8WT86
D2	6-501-358-01 s	DIODE CL-197HG5-CD-T
D3	6-502-598-01 s	DI SML-D12U8WT86
D4	6-501-358-01 s	DIODE CL-197HG5-CD-T
FB1	1-400-832-21 s	SMD EMI FERRITE
JC1	1-218-990-81 s	CONDUCTOR, CHIP (1005)
JC2	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R4	1-250-483-11 s	RES, METAL FILM CHIP 330(1005)
R5	1-250-483-11 s	RES, METAL FILM CHIP 330(1005)
R6	1-250-491-11 o	RES, METAL FILM CHIP 680(1005)
R10	1-250-483-11 s	RES, METAL FILM CHIP 330(1005)
R11	1-250-483-11 s	RES, METAL FILM CHIP 330(1005)
R12	1-250-491-11 o	RES, METAL FILM CHIP 680(1005)
R13	1-250-483-11 s	RES, METAL FILM CHIP 330(1005)
R14	1-250-483-11 s	RES, METAL FILM CHIP 330(1005)
S1	1-570-608-11 s	SWITCH, TOGGLE

MB-1207 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1969-394-A s	MOUNTED CIRCUIT BOARD, MB-1207
6pcs	3-729-061-02 s	SCREW (M2) (TYPE 1)
C11	1-135-960-91 s	CAP, CHIP CERAMIC 10MF B(3225)
C14	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C15	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
C16	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C17	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
C18	1-135-960-91 s	CAP, CHIP CERAMIC 10MF B(3225)
C19	1-135-960-91 s	CAP, CHIP CERAMIC 10MF B(3225)
C21	1-135-960-91 s	CAP, CHIP CERAMIC 10MF B(3225)
C22	1-135-960-91 s	CAP, CHIP CERAMIC 10MF B(3225)

MB-1207 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C23	1-135-960-91 s	CAP, CHIP CERAMIC 10MF B (3225)
C24	1-135-960-91 s	CAP, CHIP CERAMIC 10MF B (3225)
C26	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
CN1	1-770-623-21 s	PIN, CONNECTOR 6P
CN4	1-784-629-21 o	CONNECTOR, BOARD TO BOARD 30P
CN5	1-779-806-21 s	CONNECTOR 8P
CN6	1-785-946-21 s	CONNECTOR 3P
CN7	1-785-125-21 s	CONNECTOR 6P
CN8	1-793-807-21 o	PIN, CONNECTOR (WITH PWB) 20P
CN9	1-580-056-21 s	PIN, CONNECTOR (SMD) 3P
FB1	1-400-832-21 s	SMD EMI FERRITE
FB2	1-400-832-21 s	SMD EMI FERRITE
FB3	1-400-832-21 s	SMD EMI FERRITE
FB4	1-400-832-21 s	SMD EMI FERRITE
FB5	1-400-832-21 s	SMD EMI FERRITE
FB6	1-400-832-21 s	SMD EMI FERRITE
IC2	6-714-351-01 s	IC R1EX24016ASAS0A
L1	1-457-372-21 s	COIL, CHOKE 1UH
L4	1-400-791-21 s	INDUCTOR, CHIP 10UH (2518)
L5	1-400-791-21 s	INDUCTOR, CHIP 10UH (2518)
L6	1-457-372-21 s	COIL, CHOKE 1UH
L7	1-457-372-21 s	COIL, CHOKE 1UH
L8	1-457-372-21 s	COIL, CHOKE 1UH
L9	1-457-372-21 s	COIL, CHOKE 1UH
L10	1-457-372-21 s	COIL, CHOKE 1UH
L12	1-457-372-21 s	COIL, CHOKE 1UH
L13	1-457-372-21 s	COIL, CHOKE 1UH
L14	1-457-372-21 s	COIL, CHOKE 1UH
L16	1-457-372-21 s	COIL, CHOKE 1UH
L17	1-457-372-21 s	COIL, CHOKE 1UH
L18	1-400-791-21 s	INDUCTOR, CHIP 10UH (2518)
L19	1-400-791-21 s	INDUCTOR, CHIP 10UH (2518)
THP1	△ 1-802-108-11 s	THERMISTOR, POSITIVE
THP2	△ 1-802-108-11 s	THERMISTOR, POSITIVE
THP3	△ 1-802-108-11 s	THERMISTOR, POSITIVE
THP4	△ 1-802-108-11 s	THERMISTOR, POSITIVE
THP5	△ 1-803-615-21 s	THERMISTOR, POSITIVE

PA-418 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C002	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C003	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C004	1-112-298-91 s	CAP, CERAMIC 1MF B (1608)
C005	1-116-346-11 s	CAP, ELECT 47MF 105
C006	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C007	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C008	1-112-298-91 s	CAP, CERAMIC 1MF B (1608)
C009	1-116-346-11 s	CAP, ELECT 47MF 105
C010	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C011	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C012	1-100-159-91 s	CAP, CERAMIC 22MF B (SMD) 3216
C013	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C014	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C015	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C016	1-114-507-11 s	CAP, CERAMIC 1UF X7R
C017	1-114-507-11 s	CAP, CERAMIC 1UF X7R
C018	1-114-507-11 s	CAP, CERAMIC 1UF X7R
C019	1-114-507-11 s	CAP, CERAMIC 1UF X7R

PA-418 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C020	1-116-486-21 s	CAP, CHIP CERAMIC 47MF B 3225
C021	1-112-300-91 s	CAP, CERAMIC 4.7MF B (2012)
C022	1-112-300-91 s	CAP, CERAMIC 4.7MF B (2012)
C023	1-116-045-91 s	CAP, CERAMIC 4.7MF B 2012
C024	1-100-597-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C025	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C026	1-112-300-91 s	CAP, CERAMIC 4.7MF B (2012)
C027	1-112-300-91 s	CAP, CERAMIC 4.7MF B (2012)
C028	1-114-419-21 s	CAP, CERAMIC 10MF B (2012)
C029	1-164-850-81 s	CAP, CHIP CERAMIC 10PF CH 1005
C030	1-164-850-81 s	CAP, CHIP CERAMIC 10PF CH 1005
C031	1-135-960-91 s	CAP, CHIP CERAMIC 10MF B (3225)
C032	1-135-960-91 s	CAP, CHIP CERAMIC 10MF B (3225)
C033	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C034	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C035	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C036	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C039	1-112-298-91 s	CAP, CERAMIC 1MF B (1608)
C040	1-112-298-91 s	CAP, CERAMIC 1MF B (1608)
C041	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C042	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C043	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C044	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C045	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C046	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C047	1-116-340-11 s	CAP, ELECT 22MF 105
C048	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C049	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C050	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C051	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C052	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C053	1-100-159-91 s	CAP, CERAMIC 22MF B (SMD) 3216
C054	1-164-845-81 s	CAP, CHIP CERAMIC 5PF CH 1005
C055	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C056	1-116-340-11 s	CAP, ELECT 22MF 105
C057	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C058	1-114-419-21 s	CAP, CERAMIC 10MF B (2012)
C059	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C060	1-100-159-91 s	CAP, CERAMIC 22MF B (SMD) 3216
C061	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C062	1-114-419-21 s	CAP, CERAMIC 10MF B (2012)
C063	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C064	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C065	1-114-419-21 s	CAP, CERAMIC 10MF B (2012)
C066	1-114-419-21 s	CAP, CERAMIC 10MF B (2012)
C069	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
CN001	1-778-652-31 s	CONNECTOR, FFC (ZIF) 50P
D001	8-719-056-48 s	DI 1SS388
D002	8-719-056-48 s	DI 1SS388
D003	8-719-989-04 s	DIODE DAN222-TL
D004	8-719-989-04 s	DIODE DAN222-TL
D005	6-501-123-01 s	DIODE RB160M-60TR
FB001	1-469-122-21 s	FERRITE, EMI (SMD) (1608)
FB002	1-469-122-21 s	FERRITE, EMI (SMD) (1608)
FB003	1-469-100-21 s	FERRITE, EMI (SMD) (1608)
FB004	1-469-100-21 s	FERRITE, EMI (SMD) (1608)
FB005	1-469-122-21 s	FERRITE, EMI (SMD) (1608)
IC003	6-706-863-01 s	IC LMH6732MFX/NOPB
IC004	6-706-863-01 s	IC LMH6732MFX/NOPB
IC005	8-753-240-64 s	IC CXA3647CR-T4
IC006	8-759-346-27 s	IC LM45BIM3X
L001	1-469-551-21 s	INDUCTOR, CHIP 2.2UH (LB2016)

PA-418 BOARD

Ref. No. or Q'ty	Part No.	SP Description
Q001	8-729-015-48 s	TRANSISTOR 2SK1062 (TE85L)
R001	1-244-161-81 s	RES, CHIP 2.2 (1005)
R002	1-244-161-81 s	RES, CHIP 2.2 (1005)
R003	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R004	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R005	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R006	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R007	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R008	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R009	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R010	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R011	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R012	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R013	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R014	1-218-989-81 s	RES, CHIP 1M (1005)
R015	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R016	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R017	1-218-989-81 s	RES, CHIP 1M (1005)
R018	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R019	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R020	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R022	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R024	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R025	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R026	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R027	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R028	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R029	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R030	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R031	1-250-539-11 o	RES, METAL FILM CHIP 68K(1005)
R032	1-250-539-11 o	RES, METAL FILM CHIP 68K(1005)
R033	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R034	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R035	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R036	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R037	1-250-479-11 o	RES, METAL FILM CHIP 220(1005)
R038	1-250-479-11 o	RES, METAL FILM CHIP 220(1005)
R039	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R040	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R041	1-250-487-11 s	RES, METAL FILM CHIP 470(1005)
R042	1-250-487-11 s	RES, METAL FILM CHIP 470(1005)
R043	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R044	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R045	1-250-517-11 s	RES,METAL FILM CHIP 8.2K(1005)
R046	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R047	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R050	1-250-491-11 o	RES, METAL FILM CHIP 680(1005)
R051	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R052	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R054	1-250-507-11 o	RES,METAL FILM CHIP 3.3K(1005)
R055	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R056	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R057	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R058	1-250-491-11 o	RES, METAL FILM CHIP 680(1005)

PS-879 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	1-562-211-21 s	HOUSING, CONNECTOR 3P
1pc	4-382-854-01 s	SCREW (M3X8), P, SW (+)
1pc	4-415-286-01 s	SHEET, RADIATION

PS-879 BOARD

Ref. No. or Q'ty	Part No.	SP Description
0.3pcs	7-600-000-48 s	ADHESIVE AGENT(SC608LVZ2)180ML
C101	1-114-595-11 s	CAP, PP FILM (ACROSS) 0.47MF
C102	1-118-163-11 s	CAP, CERAMIC 0.1MF X7R (5750)
C103	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
C106	1-118-164-11 s	CAP, CERAMIC 0.22MF X7R (5750)
C108	1-118-164-11 s	CAP, CERAMIC 0.22MF X7R (5750)
C109	1-118-164-11 s	CAP, CERAMIC 0.22MF X7R (5750)
C110	1-116-445-31 s	CAP, ELECT 100MF
C111	1-112-798-11 s	CAP, ELECT 10MF
C112	1-112-800-11 s	CAP, ELECT 100MF
C114	1-114-817-11 s	CAP, CERAMIC 2.2UF X7R 3216
C115	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C116	1-112-679-21 s	CAP,CERAMIC 2200PF B (3216)
C119	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
C120	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
C121	1-112-798-11 s	CAP, ELECT 10MF
C165	1-116-493-11 s	CAP, CERAMIC 4.7MF X7R 3216
C175	1-100-591-91 s	CAP, CHIP CERAMIC 1MF B 2012
C202	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
C203	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
C204	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C205	1-128-934-91 s	CAP,CHIP CERAMIC 0.33MF B 1608
C207	1-112-800-11 s	CAP, ELECT 100MF
C208	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
C212	1-118-125-11 s	CAP, CERAMIC 0.1MF X7R
C214	1-114-507-11 s	CAP, CERAMIC 1UF X7R
C215	1-114-334-11 s	CAP, CERAMIC 10MF X7R 3225
C216	1-116-857-91 s	CAP, CERAMIC 0.22MF B (2012)
C1002	1-118-123-11 s	CAP, ELECT 180MF
C1003	1-116-857-91 s	CAP, CERAMIC 0.22MF B (2012)
C1004	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
C1007	1-112-800-11 s	CAP, ELECT 100MF
C1014	1-116-857-91 s	CAP, CERAMIC 0.22MF B (2012)
C2014	1-112-777-11 s	CAP, CERAMIC 0.01MF X7R 1005
C2016	1-164-230-91 s	CAP,CERAMIC 220PF CH 1608
C2017	1-114-214-81 s	CAP,CHIP CERAMIC470PF CH1005
C2019	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
C2020	1-118-123-11 s	CAP, ELECT 180MF
C2021	1-118-123-11 s	CAP, ELECT 180MF
C2022	1-128-954-31 s	CAP, ELECT 1000MF
C2023	1-114-334-11 s	CAP, CERAMIC 10MF X7R 3225
C2033	1-100-916-11 s	CAP, CERAMIC 0.1MF X7R 1005
C2034	1-100-591-91 s	CAP, CHIP CERAMIC 1MF B 2012
C3002	1-114-334-11 s	CAP, CERAMIC 10MF X7R 3225
C3005	1-114-334-11 s	CAP, CERAMIC 10MF X7R 3225
C3007	1-114-334-11 s	CAP, CERAMIC 10MF X7R 3225
C3008	1-100-591-91 s	CAP, CHIP CERAMIC 1MF B 2012
C3009	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
C3011	1-112-777-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3016	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
C3017	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
C3022	1-100-916-11 s	CAP, CERAMIC 0.1MF X7R 1005
C3023	1-100-916-11 s	CAP, CERAMIC 0.1MF X7R 1005
C3025	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
C3027	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
C3028	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
C3029	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
C3033	1-100-916-11 s	CAP, CERAMIC 0.1MF X7R 1005
C3034	1-100-916-11 s	CAP, CERAMIC 0.1MF X7R 1005
C3035	1-100-916-11 s	CAP, CERAMIC 0.1MF X7R 1005
C3036	1-100-916-11 s	CAP, CERAMIC 0.1MF X7R 1005
C3040	1-114-983-91 s	CAP, CHIP CERAMIC 2.2MF B 1608
C3041	1-116-099-11 s	CAP, ELECT 100MF 105
C3044	1-116-857-91 s	CAP, CERAMIC 0.22MF B (2012)
C3045	1-116-857-91 s	CAP, CERAMIC 0.22MF B (2012)

PS-879 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C3046	1-114-983-91 s	CAP, CHIP CERAMIC 2.2MF B 1608
C3047	1-116-099-11 s	CAP, ELECT 100MF 105
C3048	1-112-777-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3056	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
C3057	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
C3058	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
C4005	1-114-326-11 s	CAP, CERAMIC 0.22MF X7R 1608
C4006	1-114-214-81 s	CAP,CHIP CERAMIC470PF CH1005
C4007	1-164-230-91 s	CAP,CERAMIC 220PF CH 1608
C4010	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
C4011	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
C4015	1-100-581-81 s	CAP,CHIP CERAMIC0.0047MF B1005
C4016	1-100-591-91 s	CAP, CHIP CERAMIC 1MF B 2012
C4017	1-100-581-81 s	CAP,CHIP CERAMIC0.0047MF B1005
C4021	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
C4022	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
C4024	1-100-966-91 s	CAP, CERAMIC 10MF C (2012)
C4030	1-114-334-11 s	CAP, CERAMIC 10MF X7R 3225
C4032	1-114-334-11 s	CAP, CERAMIC 10MF X7R 3225
C4040	1-112-015-91 s	CAP, CHIP CERAMIC 47MF B 3225
C4047	1-116-347-11 s	CAP, ELECT 150MF 105
C4049	1-100-591-91 s	CAP, CHIP CERAMIC 1MF B 2012
C4050	1-100-591-91 s	CAP, CHIP CERAMIC 1MF B 2012
C4054	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
C4055	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
C4056	1-116-347-11 s	CAP, ELECT 150MF 105
C4057	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
C4059	1-116-709-11 s	CAP, CERAMIC 22MF X5R 3225
C4061	1-112-015-91 s	CAP, CHIP CERAMIC 47MF B 3225
C4062	1-116-709-11 s	CAP, CERAMIC 22MF X5R 3225
C4064	1-114-334-11 s	CAP, CERAMIC 10MF X7R 3225
C4065	1-114-334-11 s	CAP, CERAMIC 10MF X7R 3225
C5001	1-112-777-11 s	CAP, CERAMIC 0.01MF X7R 1005
C5002	1-112-777-11 s	CAP, CERAMIC 0.01MF X7R 1005
C5003	1-112-777-11 s	CAP, CERAMIC 0.01MF X7R 1005
C5004	1-100-916-11 s	CAP, CERAMIC 0.1MF X7R 1005
C5005	1-100-916-11 s	CAP, CERAMIC 0.1MF X7R 1005
C5006	1-100-916-11 s	CAP, CERAMIC 0.1MF X7R 1005
C5007	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
C5008	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
C5009	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
C5010	1-100-591-91 s	CAP, CHIP CERAMIC 1MF B 2012
C5011	1-112-777-11 s	CAP, CERAMIC 0.01MF X7R 1005
C5012	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
C5013	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
C5014	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
C5015	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
C5016	1-112-777-11 s	CAP, CERAMIC 0.01MF X7R 1005
C5017	1-112-777-11 s	CAP, CERAMIC 0.01MF X7R 1005
C5018	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
C5019	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
C5020	1-100-916-11 s	CAP, CERAMIC 0.1MF X7R 1005
C5021	1-112-777-11 s	CAP, CERAMIC 0.01MF X7R 1005
C5022	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
C5023	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
C5024	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
C5027	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
C5030	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
C5031	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
C5032	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
C5033	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
C5034	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
C5035	1-114-334-11 s	CAP, CERAMIC 10MF X7R 3225
C5036	1-114-334-11 s	CAP, CERAMIC 10MF X7R 3225
C5037	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608

PS-879 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C5038	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
C5041	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
C5042	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
C5044	1-114-334-11 s	CAP, CERAMIC 10MF X7R 3225
C5045	1-114-334-11 s	CAP, CERAMIC 10MF X7R 3225
C5048	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
C5049	1-112-777-11 s	CAP, CERAMIC 0.01MF X7R 1005
C5050	1-112-777-11 s	CAP, CERAMIC 0.01MF X7R 1005
C5051	1-112-777-11 s	CAP, CERAMIC 0.01MF X7R 1005
C5052	1-100-591-91 s	CAP, CHIP CERAMIC 1MF B 2012
C5053	1-112-777-11 s	CAP, CERAMIC 0.01MF X7R 1005
C5054	1-112-777-11 s	CAP, CERAMIC 0.01MF X7R 1005
C5055	1-112-777-11 s	CAP, CERAMIC 0.01MF X7R 1005
C5059	1-112-777-11 s	CAP, CERAMIC 0.01MF X7R 1005
C5060	1-112-777-11 s	CAP, CERAMIC 0.01MF X7R 1005
C5062	1-112-777-11 s	CAP, CERAMIC 0.01MF X7R 1005
C5063	1-112-777-11 s	CAP, CERAMIC 0.01MF X7R 1005
C5070	1-112-777-11 s	CAP, CERAMIC 0.01MF X7R 1005
C5077	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
C5078	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
CN100	△ 1-691-960-11 o	PIN, CONNECTOR (PC BOARD) 3P
CN101	△ 1-691-960-21 s	PIN, CONNECTOR (PC BOARD) 3P
CN3001	1-580-533-11 s	PIN, CONNECTOR (PC BOARD) 8P
CN5001	1-770-627-21 s	PIN, CONNECTOR 10P
CN5004	1-580-532-11 o	PIN, CONNECTOR (PC BOARD) 6P
CN5007	1-843-218-11 s	CONNECTOR, BOARD TO BOARD 40P
D101	△ 6-503-726-01 s	DI UD8KBA80
D103	8-719-083-82 s	DI UDZSUSTE-1712B
D104	6-501-124-01 s	DIODE RSX101VA-30TR
D105	8-719-069-28 s	DI 1SS400FJTE61
D106	8-719-069-55 s	DI UDZSUSTE-175.6B
D109	6-502-948-01 s	DI CMF03(TE12L,Q)
D110	8-719-083-85 s	DI UDZSUSTE-1722B
D205	8-719-080-75 s	DIODE M1FL20U-4063
D206	8-719-080-75 s	DIODE M1FL20U-4063
D207	8-719-080-75 s	DIODE M1FL20U-4063
D208	8-719-083-85 s	DI UDZSUSTE-1722B
D209	8-719-083-85 s	DI UDZSUSTE-1722B
D1001	6-501-124-01 s	DIODE RSX101VA-30TR
D1002	6-502-759-01 s	DI RF201L2STE25
D2073	8-719-083-66 s	DI UDZSUSTE-1718B
D2074	8-719-083-66 s	DI UDZSUSTE-1718B
D2078	8-719-080-75 s	DIODE M1FL20U-4063
D3001	8-719-083-66 s	DI UDZSUSTE-1718B
D3002	8-719-069-57 s	DI UDZSUSTE-176.8B
D3003	8-719-069-60 s	DI UDZSUSTE-179.1B
D3004	8-719-069-60 s	DI UDZSUSTE-179.1B
D3005	8-719-083-66 s	DI UDZSUSTE-1718B
D3006	6-501-123-01 s	DIODE RB160M-60TR
D3007	6-501-123-01 s	DIODE RB160M-60TR
D3012	8-719-069-28 s	DI 1SS400FJTE61
D3013	6-501-123-01 s	DIODE RB160M-60TR
D3014	6-501-123-01 s	DIODE RB160M-60TR
D3017	8-719-069-57 s	DI UDZSUSTE-176.8B
D3018	8-719-069-28 s	DI 1SS400FJTE61
D3020	8-719-989-04 s	DIODE DAN222-TL
D3024	8-719-069-28 s	DI 1SS400FJTE61
D3025	8-719-989-04 s	DIODE DAN222-TL
D3026	8-719-056-48 s	DI 1SS388
D3027	8-719-056-48 s	DI 1SS388
D3028	8-719-056-48 s	DI 1SS388
D4004	8-719-069-28 s	DI 1SS400FJTE61
D4005	8-719-069-28 s	DI 1SS400FJTE61

PS-879 BOARD

Ref. No. or Q'ty	Part No.	SP Description
D5001	8-719-083-57 s	DI UDZSUSTE-173.6B
D5004	8-719-069-28 s	DI 1SS400FJTE61
D5005	8-719-069-28 s	DI 1SS400FJTE61
D5006	8-719-069-28 s	DI 1SS400FJTE61
D5009	6-502-527-01 s	DI UDZSUSTE-172.2B
D5010	6-500-215-01 s	DIODE M2FM3
E1	1-535-877-22 s	CHIP, CHECKER
E2	1-535-877-22 s	CHIP, CHECKER
E3	1-535-877-22 s	CHIP, CHECKER
E4	1-535-877-22 s	CHIP, CHECKER
F101	△ 1-523-181-11 s	FUSE (SMD) (3.15A/600V)
F102	△ 1-523-181-11 s	FUSE (SMD) (3.15A/600V)
F3001	△ 1-576-566-21 s	FUSE (SMD) (15A/65V)
IC101	△ 6-708-254-01 s	IC BA00CC0WFP
IC102	△ 6-713-051-01 s	IC STR-A6153E
IC107	8-759-338-95 s	IC NJM2903V (TE2)
IC201	6-718-312-01 s	IC UCC2897APWR
IC202	6-718-304-01 s	IC IRS2118STRPBF
IC1001	6-711-947-01 s	IC MM1431CURE
IC2005	6-711-947-01 s	IC MM1431CURE
IC2007	6-720-169-01 s	IC ZXGD3104N8TC
IC2009	6-711-915-01 s	IC LM73CIMK-0
IC3001	6-702-879-01 s	IC R3112N281A-TR-FE
IC3002	8-759-711-59 s	IC NJM78L05UA-TE1
IC3004	6-713-278-01 s	IC MAX4374HEUB+TG069
IC3006	6-713-278-01 s	IC MAX4374HEUB+TG069
IC3007	6-713-278-01 s	IC MAX4374HEUB+TG069
IC3008	6-701-652-01 s	IC MAX4374TEUB+TG069
IC3009	6-713-278-01 s	IC MAX4374HEUB+TG069
IC3010	6-713-278-01 s	IC MAX4374HEUB+TG069
IC3011	6-713-278-01 s	IC MAX4374HEUB+TG069
IC3013	6-714-214-01 s	IC NJM2884U1-33 (TE2)
IC3015	6-703-976-01 s	IC R1114Q181D-TR-FE
IC3017	8-759-338-95 s	IC NJM2903V (TE2)
IC4009	8-759-338-95 s	IC NJM2903V (TE2)
IC5001	6-707-888-01 s	IC TC74VHCT14AFT (EKJ)
IC5002	6-707-888-01 s	IC TC74VHCT14AFT (EKJ)
IC5003	6-707-862-01 s	IC TC74VHC05FT (EKJ)
IC5005	6-702-879-01 s	IC R3112N281A-TR-FE
IC5006	6-707-888-01 s	IC TC74VHCT14AFT (EKJ)
IC5007	6-707-888-01 s	IC TC74VHCT14AFT (EKJ)
IC5009	6-707-862-01 s	IC TC74VHC05FT (EKJ)
IC5012	6-713-118-01 s	IC PCA9554BS-T
IC5013	6-718-336-01 s	IC LM5069MM-2
L101	△ 1-481-967-11 s	COIL, COMMON MODE CHOKE
L1001	1-460-379-11 s	COIL, CHOKE (SMD) 100UH
L2001	1-481-602-11 s	BEAD, AMORPHOUS AB-SN 4X2X6SM
L2002	1-481-602-11 s	BEAD, AMORPHOUS AB-SN 4X2X6SM
L2003	1-481-970-11 s	COIL, CHOKE 10UH
L4004	1-481-969-11 s	COIL, CHOKE 4.7UH
L4005	1-481-969-11 s	COIL, CHOKE 4.7UH
L4006	1-400-159-21 s	COIL, CHOKE 1.0UH
L4007	1-400-159-21 s	COIL, CHOKE 1.0UH
L5001	1-457-455-11 s	CHOKE COIL 10UH
L5002	1-457-455-11 s	CHOKE COIL 10UH
L5003	1-457-455-11 s	CHOKE COIL 10UH
L5006	1-456-046-21 s	COIL, CHOKE (SMD) 10UH(10X10)
PH11	△ 6-600-822-01 s	PHOTO COUPLER PC3HU72YIP0B
PH19	△ 6-600-822-01 s	PHOTO COUPLER PC3HU72YIP0B
PH21	△ 6-600-822-01 s	PHOTO COUPLER PC3HU72YIP0B
PH22	△ 6-600-822-01 s	PHOTO COUPLER PC3HU72YIP0B

PS-879 BOARD

Ref. No. or Q'ty	Part No.	SP Description
Q104	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q105	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q202	△ 6-553-004-01 s	TR STB21N65M5
Q203	△ 6-553-004-01 s	TR STB21N65M5
Q1102	6-550-750-01 s	TRANSISTOR SSM3K15FS-TE85L
Q2001	6-553-328-01 s	TR IRFS4115TRLPBF
Q2004	6-553-328-01 s	TR IRFS4115TRLPBF
Q2010	6-553-001-01 s	TR IRFL4315TRPBF
Q3004	6-551-090-01 s	TRANSISTOR FET HAT1125H-EL-E
Q3005	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q3007	6-551-090-01 s	TRANSISTOR FET HAT1125H-EL-E
Q3008	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q3009	6-551-090-01 s	TRANSISTOR FET HAT1125H-EL-E
Q3010	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q3011	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q3012	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q3013	6-551-090-01 s	TRANSISTOR FET HAT1125H-EL-E
Q3014	6-551-090-01 s	TRANSISTOR FET HAT1125H-EL-E
Q3015	6-551-090-01 s	TRANSISTOR FET HAT1125H-EL-E
Q3019	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q3020	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q3026	6-551-090-01 s	TRANSISTOR FET HAT1125H-EL-E
Q3027	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q3028	6-551-090-01 s	TRANSISTOR FET HAT1125H-EL-E
Q3029	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q4001	6-552-271-01 s	TR FDS8880
Q4002	6-552-271-01 s	TR FDS8880
Q4003	6-552-271-01 s	TR FDS8880
Q4004	6-552-271-01 s	TR FDS8880
Q4006	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q4008	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q5001	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q5002	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q5003	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q5004	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q5005	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q5008	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q5009	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q5013	8-729-928-05 s	TRANSISTOR 2SC4617TL-QR
Q5015	8-729-928-05 s	TRANSISTOR 2SC4617TL-QR
Q5016	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q5017	6-550-697-01 s	TRANSISTOR HAT2164H-EL-E
R105	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R106	1-250-479-11 o	RES, METAL FILM CHIP 220(1005)
R107	1-250-495-11 s	RES, METAL FILM CHIP 1.0K(1005)
R108	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R109	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R110	1-250-503-11 o	RES, METAL FILM CHIP 2.2K(1005)
R111	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R112	1-257-075-11 s	FIXED CHIP RESISTOR 680K(3216)
R113	1-257-075-11 s	FIXED CHIP RESISTOR 680K(3216)
R114	1-257-075-11 s	FIXED CHIP RESISTOR 680K(3216)
R115	1-257-075-11 s	FIXED CHIP RESISTOR 680K(3216)
R116	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R117	1-211-969-91 s	RES, CHIP 10 (1608)
R119	1-216-864-91 s	CONDUCTOR, CHIP (1608)
R145	1-220-305-91 o	RES, SQUARE TYPE CHIP 22K(4532)
R148	1-218-236-91 s	RES, SQUARE TYPE CHIP 1.0(3225)
R149	1-220-305-91 o	RES, SQUARE TYPE CHIP 22K(4532)
R150	1-218-236-91 s	RES, SQUARE TYPE CHIP 1.0(3225)
R153	△ 1-246-193-11 s	RES, SQUARE TYPE FUSE 10 1608
R154	1-220-230-91 s	RES, SQUARE TYPE CHIP 2.2(3225)
R158	1-220-230-91 s	RES, SQUARE TYPE CHIP 2.2(3225)
R159	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)

PS-879 BOARD

Ref. No. or Q'ty	Part No.	SP Description
R160	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R176	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R177	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R178	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R180	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R181	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R182	1-250-531-11 s	RES, METAL FILM CHIP 33K(1005)
R183	1-250-487-11 s	RES, METAL FILM CHIP 470(1005)
R184	1-250-515-11 s	RES,METAL FILM CHIP 6.8K(1005)
R185	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R203	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R204	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R205	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R206	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R207	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R210	1-250-515-11 s	RES,METAL FILM CHIP 6.8K(1005)
R211	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R212	1-250-531-11 s	RES, METAL FILM CHIP 33K(1005)
R213	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R214	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R215	1-250-503-11 o	RES, METAL FILM CHIP 2.2K(1005)
R216	1-250-483-11 s	RES, METAL FILM CHIP 330(1005)
R217	1-257-075-11 s	FIXED CHIP RESISTOR 680K(3216)
R218	1-257-075-11 s	FIXED CHIP RESISTOR 680K(3216)
R224	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R228	1-220-230-91 s	RES,SQUARE TYPE CHIP 2.2(3225)
R229	1-220-238-91 s	RES, SQUARE TYPE CHIP 10(3225)
R230	1-220-230-91 s	RES,SQUARE TYPE CHIP 2.2(3225)
R231	1-220-230-91 s	RES,SQUARE TYPE CHIP 2.2(3225)
R232	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R233	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R234	1-257-320-11 s	RES, METAL PLATE 0.05
R235	1-257-320-11 s	RES, METAL PLATE 0.05
R236	1-257-320-11 s	RES, METAL PLATE 0.05
R237	1-257-320-11 s	RES, METAL PLATE 0.05
R239	1-257-075-11 s	FIXED CHIP RESISTOR 680K(3216)
R240	1-257-075-11 s	FIXED CHIP RESISTOR 680K(3216)
R244	1-246-193-11 s	RES, SQUARE TYPE FUSE 10 1608
R245	1-246-193-11 s	RES, SQUARE TYPE FUSE 10 1608
R246	1-246-193-11 s	RES, SQUARE TYPE FUSE 10 1608
R247	1-246-193-11 s	RES, SQUARE TYPE FUSE 10 1608
R1001	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R1004	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R1005	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R1007	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R1008	1-250-491-11 o	RES, METAL FILM CHIP 680(1005)
R1009	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R1010	1-250-539-11 o	RES, METAL FILM CHIP 68K(1005)
R1011	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R1012	1-250-523-11 o	RES, METAL FILM CHIP 15K(1005)
R1013	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R1103	1-250-487-11 s	RES, METAL FILM CHIP 470(1005)
R1122	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R1123	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R1126	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R2001	1-250-515-11 s	RES,METAL FILM CHIP 6.8K(1005)
R2003	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R2005	1-250-515-11 s	RES,METAL FILM CHIP 6.8K(1005)
R2033	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R2034	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R2038	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R2039	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R2040	1-250-539-11 o	RES, METAL FILM CHIP 68K(1005)
R2041	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R2042	1-250-523-11 o	RES, METAL FILM CHIP 15K(1005)

PS-879 BOARD

Ref. No. or Q'ty	Part No.	SP Description
R2044	1-250-507-11 o	RES,METAL FILM CHIP 3.3K(1005)
R2075	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R2076	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R2080	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R2083	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R2088	1-250-507-11 o	RES,METAL FILM CHIP 3.3K(1005)
R2089	1-220-305-91 o	RES,SQUARE TYPE CHIP 22K(4532)
R2090	1-220-305-91 o	RES,SQUARE TYPE CHIP 22K(4532)
R2091	1-220-230-91 s	RES,SQUARE TYPE CHIP 2.2(3225)
R2092	1-220-234-91 s	RES,SQUARE TYPE CHIP 4.7(3225)
R2095	1-218-626-91 s	RES, METAL FILM (CHIP) 100
R2096	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R2097	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R3001	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R3008	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R3010	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R3011	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R3014	1-257-090-11 s	RES, METAL PLATE 0.005
R3015	1-257-090-11 s	RES, METAL PLATE 0.005
R3016	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R3017	1-250-531-11 s	RES, METAL FILM CHIP 33K(1005)
R3018	1-250-515-11 s	RES,METAL FILM CHIP 6.8K(1005)
R3019	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R3027	1-257-090-11 s	RES, METAL PLATE 0.005
R3028	1-257-090-11 s	RES, METAL PLATE 0.005
R3030	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R3031	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R3035	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R3036	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R3037	1-250-515-11 s	RES,METAL FILM CHIP 6.8K(1005)
R3038	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R3039	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R3041	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R3042	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R3043	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R3044	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R3045	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R3046	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R3047	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R3048	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R3051	1-219-706-21 s	RES, CHIP (SQUARE TYPE) 0.10
R3058	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R3059	1-257-090-11 s	RES, METAL PLATE 0.005
R3060	1-257-090-11 s	RES, METAL PLATE 0.005
R3061	1-257-090-11 s	RES, METAL PLATE 0.005
R3062	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R3064	1-250-523-11 o	RES, METAL FILM CHIP 15K(1005)
R3065	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R3066	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R3067	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R3068	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R3069	1-250-523-11 o	RES, METAL FILM CHIP 15K(1005)
R3070	1-250-507-11 o	RES,METAL FILM CHIP 3.3K(1005)
R3071	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R3072	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R3073	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R3074	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R3075	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R3076	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R3079	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R3090	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R3091	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R3092	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R3108	1-250-515-11 s	RES,METAL FILM CHIP 6.8K(1005)
R3109	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)

PS-879 BOARD

Ref. No. or Q'ty	Part No.	SP Description
R3121	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R3122	1-250-531-11 s	RES, METAL FILM CHIP 33K(1005)
R3123	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R3124	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R3125	1-250-487-11 s	RES, METAL FILM CHIP 470(1005)
R3126	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R3127	1-250-523-11 o	RES, METAL FILM CHIP 15K(1005)
R3128	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R3129	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R3130	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R3131	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R3133	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R3135	1-250-531-11 s	RES, METAL FILM CHIP 33K(1005)
R3136	1-250-515-11 s	RES, METAL FILM CHIP 6.8K(1005)
R3137	1-250-539-11 o	RES, METAL FILM CHIP 68K(1005)
R3138	1-250-551-11 s	RES, METAL FILM CHIP 220K(1005)
R3140	1-250-563-11 s	RES, METAL FILM CHIP 680K(1005)
R3142	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R3144	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R3146	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R3148	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R3149	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R4001	1-250-531-11 s	RES, METAL FILM CHIP 33K(1005)
R4002	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R4003	1-250-507-11 o	RES, METAL FILM CHIP 3.3K(1005)
R4004	1-250-503-11 o	RES, METAL FILM CHIP 2.2K(1005)
R4005	1-250-511-11 o	RES, METAL FILM CHIP 4.7K(1005)
R4006	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R4007	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R4008	1-250-531-11 s	RES, METAL FILM CHIP 33K(1005)
R4009	1-242-967-81 s	RES, CHIP 1.0 (1005)
R4012	1-242-967-81 s	RES, CHIP 1.0 (1005)
R4013	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R4014	1-250-547-11 s	RES, METAL FILM CHIP 150K(1005)
R4035	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R4036	1-250-531-11 s	RES, METAL FILM CHIP 33K(1005)
R4037	1-250-495-11 s	RES, METAL FILM CHIP 1.0K(1005)
R4038	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R4042	1-250-539-11 o	RES, METAL FILM CHIP 68K(1005)
R4043	1-250-531-11 s	RES, METAL FILM CHIP 33K(1005)
R4044	1-250-511-11 o	RES, METAL FILM CHIP 4.7K(1005)
R4045	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R4046	1-250-495-11 s	RES, METAL FILM CHIP 1.0K(1005)
R4047	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R4048	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R4053	1-257-090-11 s	RES, METAL PLATE 0.005
R4054	1-257-090-11 s	RES, METAL PLATE 0.005
R4055	1-257-090-11 s	RES, METAL PLATE 0.005
R4056	1-257-090-11 s	RES, METAL PLATE 0.005
R4083	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R4085	1-250-543-11 o	RES, METAL FILM CHIP 100K(1005)
R4091	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R4092	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R4093	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R4094	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R4100	1-250-479-11 o	RES, METAL FILM CHIP 220(1005)
R5004	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R5005	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R5007	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R5010	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R5017	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R5018	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R5023	1-250-531-11 s	RES, METAL FILM CHIP 33K(1005)
R5024	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R5025	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)

PS-879 BOARD

Ref. No. or Q'ty	Part No.	SP Description
R5026	1-250-531-11 s	RES, METAL FILM CHIP 33K(1005)
R5028	1-250-531-11 s	RES, METAL FILM CHIP 33K(1005)
R5029	1-250-523-11 o	RES, METAL FILM CHIP 15K(1005)
R5030	1-250-531-11 s	RES, METAL FILM CHIP 33K(1005)
R5031	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R5039	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R5040	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R5041	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R5045	1-250-511-11 o	RES, METAL FILM CHIP 4.7K(1005)
R5046	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R5047	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R5048	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R5049	1-250-531-11 s	RES, METAL FILM CHIP 33K(1005)
R5052	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R5053	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R5057	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
RB5001	1-234-380-21 s	RES, NETWORK 47K (1005X4)
RB5002	1-234-380-21 s	RES, NETWORK 47K (1005X4)
RB5004	1-234-380-21 s	RES, NETWORK 47K (1005X4)
RB5006	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB5007	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB5008	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB5009	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RY11	⚠ 1-755-651-11 s	RELAY
T11	⚠ 1-445-805-21 s	TRANSFORMER, DC-DC CONVERTER
T23	⚠ 1-697-143-11 s	TRANSFORMER, DC-DC CONVERTER
THP101	⚠ 1-802-108-11 s	THERMISTOR, POSITIVE
X5001	1-813-329-11 s	OSCILLATOR, CRYSTAL

RE-319 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1980-228-A s	MOUNTED CIRCUIT BOARD, RE-319
C6001	1-116-709-11 s	CAP, CERAMIC 22MF X5R 3225
C6003	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
C6004	1-114-334-11 s	CAP, CERAMIC 10MF X7R 3225
C6005	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
C6006	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
C6007	1-114-334-11 s	CAP, CERAMIC 10MF X7R 3225
C6008	1-116-113-11 s	CAP, ELECT 100MF 105
C6009	1-114-965-11 s	CAP, CERAMIC 4.7MF X7R (3225)
C6010	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
C6011	1-114-965-11 s	CAP, CERAMIC 4.7MF X7R (3225)
C6012	1-114-334-11 s	CAP, CERAMIC 10MF X7R 3225
C6013	1-112-777-11 s	CAP, CERAMIC 0.01MF X7R 1005
C6014	1-112-777-11 s	CAP, CERAMIC 0.01MF X7R 1005
C6015	1-116-113-11 s	CAP, ELECT 100MF 105
C6016	1-116-113-11 s	CAP, ELECT 100MF 105
C6017	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
C6018	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
C6022	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
C6023	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
C6024	1-116-709-11 s	CAP, CERAMIC 22MF X5R 3225
C6025	1-114-334-11 s	CAP, CERAMIC 10MF X7R 3225
C6026	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
C6027	1-114-334-11 s	CAP, CERAMIC 10MF X7R 3225
C6031	1-162-970-91 s	CAP, CERAMIC 0.01MF B 1608

RE-319 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C6032	1-115-412-91 s	CAP,CHIP CERAMIC 680PF CH 1608
C6033	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
C6034	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
C6037	1-114-334-11 s	CAP, CERAMIC 10MF X7R 3225
C6038	1-114-334-11 s	CAP, CERAMIC 10MF X7R 3225
C6039	1-114-965-11 s	CAP, CERAMIC 4.7MF X7R (3225)
C6040	1-116-709-11 s	CAP, CERAMIC 22MF X5R 3225
C6041	1-114-965-11 s	CAP, CERAMIC 4.7MF X7R (3225)
C6043	1-114-334-11 s	CAP, CERAMIC 10MF X7R 3225
C6044	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C6048	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C6050	1-114-334-11 s	CAP, CERAMIC 10MF X7R 3225
C6051	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
C6054	1-114-817-11 s	CAP, CERAMIC 2.2UF X7R 3216
C6071	1-165-585-21 s	CAP, CHIP ELECT 47MF
C6072	1-114-334-11 s	CAP, CERAMIC 10MF X7R 3225
C6073	1-114-334-11 s	CAP, CERAMIC 10MF X7R 3225
C6074	1-165-585-21 s	CAP, CHIP ELECT 47MF
C6084	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
C6085	1-114-334-11 s	CAP, CERAMIC 10MF X7R 3225
C6086	1-114-965-11 s	CAP, CERAMIC 4.7MF X7R (3225)
C6087	1-112-777-11 s	CAP, CERAMIC 0.01MF X7R 1005
C6088	1-116-113-11 s	CAP, ELECT 100MF 105
C6089	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
C6092	1-116-709-11 s	CAP, CERAMIC 22MF X5R 3225
C6093	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
C6096	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
C6097	1-116-709-11 s	CAP, CERAMIC 22MF X5R 3225
C6098	1-164-230-91 s	CAP,CERAMIC 220PF CH 1608
C6099	1-112-800-11 s	CAP, ELECT 100MF
C6100	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
C6101	1-116-709-11 s	CAP, CERAMIC 22MF X5R 3225
C6102	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
C6104	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C6105	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
C6107	1-116-709-11 s	CAP, CERAMIC 22MF X5R 3225
C6108	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
C6109	1-112-800-11 s	CAP, ELECT 100MF
C6110	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
CN6001	1-794-225-11 o	CONNECTOR, BOARD TO BOARD 40P
CN6002	1-793-807-21 o	PIN, CONNECTOR (WITH PWB) 20P
CN6003	1-691-550-21 s	PIN, CONNECTOR (1.5MM) (SMD) 3P
D6001	8-719-072-43 s	DIODE RB050L-40TE25
D6002	8-719-072-43 s	DIODE RB050L-40TE25
D6004	8-719-072-43 s	DIODE RB050L-40TE25
D6007	8-719-072-43 s	DIODE RB050L-40TE25
D6008	8-719-072-43 s	DIODE RB050L-40TE25
D6012	8-719-072-43 s	DIODE RB050L-40TE25
D6013	6-500-694-01 s	DI UDZSUSTE-172.4B
D6014	8-719-938-77 s	DIODE SB05-05C-TB-E
D6015	8-719-072-43 s	DIODE RB050L-40TE25
D6016	8-719-083-83 s	DI UDZSUSTE-1715B
D6017	8-719-938-77 s	DIODE SB05-05C-TB-E
D6018	8-719-072-43 s	DIODE RB050L-40TE25
D6019	6-500-694-01 s	DI UDZSUSTE-172.4B
D6020	8-719-083-83 s	DI UDZSUSTE-1715B
E1	1-535-877-22 s	CHIP, CHECKER
E2	1-535-877-22 s	CHIP, CHECKER
FB6001	1-416-976-21 s	FERRITE, EMI (SMD) (3216)
IC6001	6-715-696-01 s	IC TPS5430DDAR
IC6002	6-711-654-01 s	IC TPS5420DRG4
IC6003	6-711-654-01 s	IC TPS5420DRG4
IC6012	6-711-654-01 s	IC TPS5420DRG4

RE-319 BOARD

Ref. No. or Q'ty	Part No.	SP Description
IC6013	8-759-337-40 s	IC NJM2904V(Te2)
L6002	1-400-175-21 s	COIL, CHOKE 47UH
L6003	1-400-303-21 s	COIL, CHOKE 68UH
L6005	1-457-372-21 s	COIL, CHOKE 1UH
L6006	1-457-372-21 s	COIL, CHOKE 1UH
L6007	1-457-455-11 s	CHOKE COIL 10UH
L6008	1-457-455-11 s	CHOKE COIL 10UH
L6009	1-457-372-21 s	COIL, CHOKE 1UH
L6012	1-457-372-21 s	COIL, CHOKE 1UH
L6014	1-457-372-21 s	COIL, CHOKE 1UH
L6015	1-457-372-21 s	COIL, CHOKE 1UH
L6016	1-400-175-21 s	COIL, CHOKE 47UH
L6017	1-481-968-11 s	COIL, CHOKE 15UH
L6019	1-460-426-11 s	COIL, CHOKE 1.0UH
L6020	1-460-426-11 s	COIL, CHOKE 1.0UH
L6021	1-481-035-11 s	INDUCTOR (10UH)
L6022	1-481-035-11 s	INDUCTOR (10UH)
L6023	1-481-035-11 s	INDUCTOR (10UH)
L6024	1-481-035-11 s	INDUCTOR (10UH)
Q6001	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q6002	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q6003	8-729-928-28 s	TRANSISTOR DTA144EE-TL
Q6004	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q6005	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q6006	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q6007	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q6008	8-729-928-28 s	TRANSISTOR DTA144EE-TL
Q6009	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q6011	8-729-928-05 s	TRANSISTOR 2SC4617TL-QR
Q6012	8-729-928-05 s	TRANSISTOR 2SC4617TL-QR
Q6013	8-729-928-25 s	TRANSISTOR 2SA1774TL-QR
Q6014	6-550-631-01 s	TRANSISTOR 2SA1797-T100-Q
Q6016	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q6017	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q6018	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q6019	6-550-631-01 s	TRANSISTOR 2SA1797-T100-Q
Q6021	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q6022	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q6023	8-729-928-82 s	TRANSISTOR DTC144EE-TL
R6001	1-250-507-11 o	RES,METAL FILM CHIP 3.3K(1005)
R6002	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R6003	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R6004	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R6005	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R6011	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R6012	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R6013	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R6014	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R6015	1-250-487-11 s	RES, METAL FILM CHIP 470(1005)
R6025	1-250-515-11 s	RES,METAL FILM CHIP 6.8K(1005)
R6026	1-250-499-11 o	RES,METAL FILM CHIP 1.5K(1005)
R6027	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R6028	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R6029	1-250-515-11 s	RES,METAL FILM CHIP 6.8K(1005)
R6031	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R6032	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R6033	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R6037	1-250-507-11 o	RES,METAL FILM CHIP 3.3K(1005)
R6049	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R6050	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R6051	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R6052	1-250-475-11 s	RES, METAL FILM CHIP 150(1005)
R6053	1-250-499-11 o	RES,METAL FILM CHIP 1.5K(1005)
R6054	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)

RE-319 BOARD

Ref. No. or Q'ty	Part No.	SP Description
R6055	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R6056	1-250-547-11 s	RES,METAL FILM CHIP 150K(1005)
R6057	1-250-531-11 s	RES, METAL FILM CHIP 33K(1005)
R6058	1-250-515-11 s	RES,METAL FILM CHIP 6.8K(1005)
R6059	1-250-499-11 o	RES,METAL FILM CHIP 1.5K(1005)
R6063	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R6078	1-250-507-11 o	RES,METAL FILM CHIP 3.3K(1005)
R6079	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R6080	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R6081	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R6082	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R6086	1-250-563-11 s	RES,METAL FILM CHIP 680K(1005)
R6087	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R6088	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R6089	1-250-539-11 o	RES, METAL FILM CHIP 68K(1005)
R6090	1-250-523-11 o	RES, METAL FILM CHIP 15K(1005)
R6091	1-218-863-91 s	RES, CHIP 4.7K (1608)
R6093	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R6094	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R6095	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R6096	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R6102	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R6103	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R6104	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R6108	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R6109	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R6110	1-250-539-11 o	RES, METAL FILM CHIP 68K(1005)
R6111	1-250-515-11 s	RES,METAL FILM CHIP 6.8K(1005)
R6112	1-218-863-91 s	RES, CHIP 4.7K (1608)
R6115	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R6116	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R6117	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R6120	1-218-990-81 s	CONDUCTOR, CHIP (1005)
THP601 △	1-803-615-21 s	THERMISTOR, POSITIVE
THP602 △	1-803-353-21 s	THERMISTOR, POSITIVE
THP603 △	1-803-615-21 s	THERMISTOR, POSITIVE
THP604 △	1-803-615-21 s	THERMISTOR, POSITIVE
THP605 △	1-803-615-21 s	THERMISTOR, POSITIVE
THP606 △	1-802-063-21 s	THERMISTOR, POSITIVE

SDI-117 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1969-515-A s	MOUNTED CIRCUIT BOARD, SDI-117
1pc	1-458-766-11 s	MODULE, OPTICAL (SFP)
1pc	4-669-854-01 s	CAGE, TOP
C101	1-126-400-21 s	CAP, CHIP ELECT 22MF(6.3X5.7)
C102	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C103	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C105	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C106	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C113	1-100-055-21 s	CAP, CHIP CERAMIC 22MF B 3225
C114	1-100-055-21 s	CAP, CHIP CERAMIC 22MF B 3225
C117	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C118	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C120	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C121	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C122	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C124	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C125	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)

SDI-117 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C126	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C127	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C129	1-164-936-81 s	CAP, CHIP CERAMIC 680PF B 1005
C130	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C131	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C132	1-164-850-81 s	CAP, CHIP CERAMIC 10PF CH 1005
C133	1-164-936-81 s	CAP, CHIP CERAMIC 680PF B 1005
C134	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C135	1-164-850-81 s	CAP, CHIP CERAMIC 10PF CH 1005
C136	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C137	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C138	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C139	1-116-711-11 s	CAP, CERAMIC 22MF X5R 3216
C140	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C141	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C142	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C143	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C144	1-116-711-11 s	CAP, CERAMIC 22MF X5R 3216
C145	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C146	1-116-711-11 s	CAP, CERAMIC 22MF X5R 3216
C147	1-112-933-11 s	CAP, NIOBIUM ELECT 47MF
C148	1-112-933-11 s	CAP, NIOBIUM ELECT 47MF
C149	1-114-548-11 s	CAP, NIOBIUM ELECT 22UF
C201	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C202	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C203	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C205	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C206	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C207	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C208	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C209	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C214	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C215	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C216	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C217	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C218	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C219	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C220	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C221	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C222	1-164-850-81 s	CAP, CHIP CERAMIC 10PF CH 1005
C223	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C224	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C301	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C302	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C303	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C304	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C305	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C306	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C307	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C308	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C309	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C310	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C311	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C312	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C313	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C314	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C315	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C316	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C317	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C318	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C319	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C320	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C321	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C322	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C323	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005

SDI-117 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C324	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C325	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C326	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C327	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C328	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C329	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C330	1-118-388-11 s	CAP, CERAMIC 0.047MF X7R 1005
C331	1-118-388-11 s	CAP, CERAMIC 0.047MF X7R 1005
C332	1-118-388-11 s	CAP, CERAMIC 0.047MF X7R 1005
C333	1-116-744-11 s	CAP, CERAMIC 0.22MF X5R 1005
C334	1-116-744-11 s	CAP, CERAMIC 0.22MF X5R 1005
C335	1-116-744-11 s	CAP, CERAMIC 0.22MF X5R 1005
C336	1-116-744-11 s	CAP, CERAMIC 0.22MF X5R 1005
C337	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C338	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C339	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C340	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C341	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C342	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C343	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C344	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C345	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C346	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C347	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C348	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C349	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C350	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C351	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C352	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C353	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C354	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C355	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C356	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C357	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C358	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C359	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C360	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C361	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C362	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C363	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C364	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C501	1-164-850-81 s	CAP, CHIP CERAMIC 10PF CH 1005
C502	1-164-850-81 s	CAP, CHIP CERAMIC 10PF CH 1005
C503	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C504	1-116-711-11 s	CAP, CERAMIC 22MF X5R 3216
C505	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C506	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C507	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C508	1-112-746-91 s	CAP, CERAMIC 4.7MF B (1608)
C509	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C511	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C512	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C513	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C514	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C515	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C516	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C518	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C520	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C521	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C524	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C525	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C530	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C540	1-112-746-91 s	CAP, CERAMIC 4.7MF B (1608)
C541	1-112-746-91 s	CAP, CERAMIC 4.7MF B (1608)
C542	1-112-746-91 s	CAP, CERAMIC 4.7MF B (1608)

SDI-117 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C543	1-112-746-91 s	CAP, CERAMIC 4.7MF B (1608)
C557	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C560	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C561	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C562	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C566	1-164-866-81 s	CAP, CHIP CERAMIC 47PF CH 1005
C567	1-164-848-81 s	CAP, CHIP CERAMIC 8PF CH 1005
C568	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C569	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C570	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C571	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C572	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C573	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C574	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
CN202	1-817-176-11 s	CONNECTOR, SFP FIBER CHANNEL
CN203	1-695-479-21 o	PIN, CONNECTOR (PC BOARD) 2P
CN301	1-770-627-21 s	PIN, CONNECTOR 10P
CN501	1-770-620-21 s	PIN, CONNECTOR 3P
D101	8-719-083-67 s	DI UDZSUSTE-1720B
D102	6-502-197-01 s	DI SML-D12M8WT86SM
D103	8-719-069-59 s	DI UDZSUSTE-178.2B
D104	8-719-989-77 s	DIODE SC802-04-TE12RA
D105	8-719-989-77 s	DIODE SC802-04-TE12RA
D106	8-719-989-77 s	DIODE SC802-04-TE12RA
D107	8-719-083-60 s	DI UDZSUSTE-174.7B
D108	8-719-083-60 s	DI UDZSUSTE-174.7B
D201	8-719-069-56 s	DI UDZSUSTE-176.2B
D203	6-502-598-01 s	DI SML-D12U8WT86
D204	6-502-598-01 s	DI SML-D12U8WT86
D205	6-502-598-01 s	DI SML-D12U8WT86
D301	6-501-436-01 s	DIODE SML412BC6TT86
E1	1-535-877-22 s	CHIP, CHECKER
E2	1-535-877-22 s	CHIP, CHECKER
E3	1-535-877-22 s	CHIP, CHECKER
E4	1-535-877-22 s	CHIP, CHECKER
E5	1-535-877-22 s	CHIP, CHECKER
E6	1-535-877-22 s	CHIP, CHECKER
FB101	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB102	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB103	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB104	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB105	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB106	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB107	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB108	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB109	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB110	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB111	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB112	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB301	1-500-448-21 s	FERRITE, EMI (SMD) (3216)
FB302	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB303	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB304	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB305	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB306	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB307	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB308	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB309	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB501	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB503	1-400-832-21 s	SMD EMI FERRITE
FB507	1-400-833-21 s	SMD EMI FERRITE
FL501	1-233-345-21 s	FILTER, LOW PASS (5.5MHZ)

SDI-117 BOARD

Ref. No. or Q'ty	Part No.	SP Description
IC103	6-704-976-01 s	IC ADR381ARTZ-REEL7
IC104	6-712-135-01 o	IC R1173H001D-T1-FE
IC105	6-712-135-01 o	IC R1173H001D-T1-FE
IC106	6-706-220-01 s	IC LTC3411EMS#TR
IC107	8-759-327-01 s	IC NJM062V (TE2)
IC201	6-715-039-01 s	IC TC7SZ08FU, RSONYJ
IC202	6-702-879-01 s	IC R3112N281A-TR-FE
IC203	6-715-039-01 s	IC TC7SZ08FU, RSONYJ
IC205	6-715-039-01 s	IC TC7SZ08FU, RSONYJ
IC206	6-706-484-01 s	IC TC7SH04FU
IC207	6-706-484-01 s	IC TC7SH04FU
IC208	6-706-484-01 s	IC TC7SH04FU
IC209	6-706-482-01 s	IC TC7SH00FU
IC210	8-759-327-01 s	IC NJM062V (TE2)
IC211	6-706-487-01 s	IC TC7SH08FU
IC212	8-759-338-95 s	IC NJM2903V (TE2)
IC213	6-707-883-01 s	IC TC74VHCT00AFT (EKJ)
IC302	6-716-953-01 s	IC W25Q64CVSSIG
IC303	6-706-487-01 s	IC TC7SH08FU
IC304	6-706-487-01 s	IC TC7SH08FU
IC305	8-759-831-52 s	IC TC7WH125FK
IC306	8-759-831-52 s	IC TC7WH125FK
IC307	8-759-831-52 s	IC TC7WH125FK
IC308	8-759-831-52 s	IC TC7WH125FK
IC309	8-759-831-52 s	IC TC7WH125FK
IC310	6-706-484-01 s	IC TC7SH04FU
IC501	6-709-646-01 s	IC TLC2933AIPWR
IC505	6-706-949-01 s	IC IDT71V416S12PHG-TL
IC507	6-707-414-01 s	IC DS90LV011ATMF
IC508	6-715-039-01 s	IC TC7SZ08FU, RSONYJ
IC510	6-706-471-01 s	IC THS5661AIPWR
IC512	8-759-669-66 s	IC TLC272CPWR-12
IC513	8-759-561-46 s	IC AD8014ARTZ-REEL7
L101	1-481-035-11 s	INDUCTOR (10UH)
L102	1-481-035-11 s	INDUCTOR (10UH)
L103	1-481-035-11 s	INDUCTOR (10UH)
L104	1-457-714-11 s	CHOKE COIL 4.7UH
L105	1-412-979-41 s	INDUCTOR, SMALL TYPE 1.0UH
L106	1-412-979-41 s	INDUCTOR, SMALL TYPE 1.0UH
L201	1-481-175-21 s	INDUCTOR 4.7UH
L203	1-400-791-21 s	INDUCTOR, CHIP 10UH (2518)
L205	1-400-788-21 s	INDUCTOR, CHIP 1.0UH (2518)
L206	1-400-788-21 s	INDUCTOR, CHIP 1.0UH (2518)
L501	1-481-175-21 s	INDUCTOR 4.7UH
L502	1-481-175-21 s	INDUCTOR 4.7UH
L503	1-481-175-21 s	INDUCTOR 4.7UH
L504	1-481-175-21 s	INDUCTOR 4.7UH
L506	1-481-175-21 s	INDUCTOR 4.7UH
L512	1-400-791-21 s	INDUCTOR, CHIP 10UH (2518)
L513	1-400-791-21 s	INDUCTOR, CHIP 10UH (2518)
L514	1-400-791-21 s	INDUCTOR, CHIP 10UH (2518)
L515	1-400-791-21 s	INDUCTOR, CHIP 10UH (2518)
Q102	8-729-928-05 s	TRANSISTOR 2SC4617TL-QR
Q104	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q106	8-729-209-77 s	TRANSISTOR 2SC2873Y-TE12L
Q108	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q109	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q111	8-729-928-37 s	TRANSISTOR DTA114EE-TL
Q112	6-552-494-01 s	TR SI2307CDS-T1-GE3
Q114	8-729-928-25 s	TRANSISTOR 2SA1774TL-QR
Q115	8-729-928-05 s	TRANSISTOR 2SC4617TL-QR
Q201	8-729-928-37 s	TRANSISTOR DTA114EE-TL
Q202	8-729-928-37 s	TRANSISTOR DTA114EE-TL
Q203	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q204	8-729-928-25 s	TRANSISTOR 2SA1774TL-QR

SDI-117 BOARD

Ref. No. or Q'ty	Part No.	SP Description
Q205	8-729-928-05 s	TRANSISTOR 2SC4617TL-QR
Q206	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q301	8-729-928-25 s	TRANSISTOR 2SA1774TL-QR
Q501	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q502	8-729-928-25 s	TRANSISTOR 2SA1774TL-QR
Q503	8-729-928-25 s	TRANSISTOR 2SA1774TL-QR
Q504	8-729-928-25 s	TRANSISTOR 2SA1774TL-QR
R102	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R104	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R105	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R106	1-218-871-91 s	RES, CHIP 10K (1608)
R107	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R108	1-218-871-91 s	RES, CHIP 10K (1608)
R109	1-218-871-91 s	RES, CHIP 10K (1608)
R111	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R112	1-218-871-91 s	RES, CHIP 10K (1608)
R114	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R115	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R116	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R118	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R121	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R122	1-250-479-11 o	RES, METAL FILM CHIP 220(1005)
R123	1-250-479-11 o	RES, METAL FILM CHIP 220(1005)
R124	1-250-531-11 s	RES, METAL FILM CHIP 33K(1005)
R125	1-250-531-11 s	RES, METAL FILM CHIP 33K(1005)
R126	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R127	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R128	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R129	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R130	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R131	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R132	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R133	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R135	1-250-539-11 o	RES, METAL FILM CHIP 68K(1005)
R136	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R137	1-250-551-11 s	RES,METAL FILM CHIP 220K(1005)
R138	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R139	1-243-975-81 s	RES, CHIP 4.7M (1005)
R140	1-248-352-11 s	RES, METAL FILM 2.2 (2012)
R141	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R142	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R143	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R144	1-250-507-11 o	RES,METAL FILM CHIP 3.3K(1005)
R145	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R146	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R201	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R202	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R204	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R205	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R208	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R209	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R210	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R211	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R212	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R213	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R214	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R215	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R216	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R217	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R218	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R220	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R221	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R222	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R233	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R234	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)

SDI-117 BOARD

Ref. No. or Q'ty	Part No.	SP Description
R235	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R236	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R237	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R238	1-250-531-11 s	RES, METAL FILM CHIP 33K(1005)
R239	1-250-531-11 s	RES, METAL FILM CHIP 33K(1005)
R240	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R241	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R242	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R243	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R244	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R245	1-218-855-91 s	RES, CHIP 2.2K (1608)
R246	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R247	1-250-491-11 o	RES, METAL FILM CHIP 680(1005)
R248	1-250-491-11 o	RES, METAL FILM CHIP 680(1005)
R249	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R250	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R251	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R252	1-250-515-11 s	RES,METAL FILM CHIP 6.8K(1005)
R253	1-250-515-11 s	RES,METAL FILM CHIP 6.8K(1005)
R254	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R255	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R256	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R257	1-250-479-11 o	RES, METAL FILM CHIP 220(1005)
R258	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R259	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R264	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R268	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R269	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R272	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R273	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R275	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R302	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R303	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R304	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R305	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R306	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R307	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R308	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R309	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R310	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R311	1-250-487-11 s	RES, METAL FILM CHIP 470(1005)
R312	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R401	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R402	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R404	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R405	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R406	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R408	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R412	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R413	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R415	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R417	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R420	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R421	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R422	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R427	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R428	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R429	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R430	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R431	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R501	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R503	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R504	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R506	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R509	1-250-499-11 o	RES,METAL FILM CHIP 1.5K(1005)

SDI-117 BOARD

Ref. No. or Q'ty	Part No.	SP Description
R510	1-250-567-11 s	RES, METAL FILM CHIP 1M (1005)
R511	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R512	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R513	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R514	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R517	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R518	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R519	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R520	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R521	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R522	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R523	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R524	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R525	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R526	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R527	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R528	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R529	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R530	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R531	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R533	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R534	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R539	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R540	1-208-856-81 s	RES, CHIP 51 (1005)
R541	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R542	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R543	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R546	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R547	1-208-856-81 s	RES, CHIP 51 (1005)
R549	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R550	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R551	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R552	1-250-523-11 o	RES, METAL FILM CHIP 15K(1005)
R553	1-250-507-11 o	RES,METAL FILM CHIP 3.3K(1005)
R554	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R555	1-250-483-11 s	RES, METAL FILM CHIP 330(1005)
R556	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R558	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R559	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R560	1-250-479-11 o	RES, METAL FILM CHIP 220(1005)
R562	1-250-487-11 s	RES, METAL FILM CHIP 470(1005)
R563	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R564	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R565	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R566	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R567	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R568	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R569	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R571	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R572	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R574	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R575	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R580	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R581	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R582	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R583	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R590	1-250-479-11 o	RES, METAL FILM CHIP 220(1005)
R591	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R592	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R593	1-250-507-11 o	RES,METAL FILM CHIP 3.3K(1005)
R595	1-250-483-11 s	RES, METAL FILM CHIP 330(1005)
R596	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R598	1-218-990-81 s	CONDUCTOR, CHIP (1005)
RB201	1-234-371-21 s	RES, NETWORK 47 (1005X4)

SDI-117 BOARD

Ref. No. or Q'ty	Part No.	SP Description
RB202	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB203	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB204	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB205	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB206	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB215	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB216	1-234-378-21 s	RES, NETWORK 10K (1005X4)
RB217	1-234-377-21 s	RES, NETWORK 4.7K (1005X4)
RB301	1-234-380-21 s	RES, NETWORK 47K (1005X4)
RB302	1-234-380-21 s	RES, NETWORK 47K (1005X4)
RB303	1-234-380-21 s	RES, NETWORK 47K (1005X4)
RB304	1-234-378-21 s	RES, NETWORK 10K (1005X4)
RB305	1-234-378-21 s	RES, NETWORK 10K (1005X4)
RB306	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB307	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB308	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB401	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB407	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB503	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB504	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB505	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB506	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB507	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB508	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB509	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB510	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB511	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB512	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB513	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB514	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB515	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB516	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB521	1-234-373-21 s	RES, NETWORK 220 (1005X4)
RB522	1-234-373-21 s	RES, NETWORK 220 (1005X4)
VDR201	1-811-889-11 s	VARISTOR, CHIP
X501	1-795-670-12 s	OSCILLATOR, CRYSTAL (VCXO)3.3V
X502	1-795-671-12 s	OSCILLATOR, CRYSTAL (VCXO)3.3V

SE-1138 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1969-519-A s	MOUNTED CIRCUIT BOARD, SE-1138
CN001	1-770-622-21 s	PIN, CONNECTOR 5P
PH1	6-600-300-01 s	IC NJL5901R (TE1)
PH2	6-600-300-01 s	IC NJL5901R (TE1)

SW-1604 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1946-172-A s	MOUNTED CIRCUIT BOARD, SW-1604
C1	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C2	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
CN1	1-770-620-21 s	PIN, CONNECTOR 3P
FB1	1-400-832-21 s	SMD EMI FERRITE

SW-1604 BOARD

Ref. No. or Q'ty	Part No.	SP Description
RB1	1-233-577-21 s	RES, CHIP NETWORK 470 (3216)
S1	1-786-725-21 s	SWITCH, TACTILE
S2	1-786-725-21 s	SWITCH, TACTILE

SW-1605 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1946-173-A s	MOUNTED CIRCUIT BOARD, SW-1605
C1	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C2	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
CN1	1-770-620-21 s	PIN, CONNECTOR 3P
FB1	1-400-832-21 s	SMD EMI FERRITE
RB1	1-233-577-21 s	RES, CHIP NETWORK 470 (3216)
S1	1-786-725-21 s	SWITCH, TACTILE
S2	1-786-725-21 s	SWITCH, TACTILE

SW-1606 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1946-174-A s	MOUNTED CIRCUIT BOARD, SW-1606
C1	1-112-775-11 s	CAP, CERAMIC 2200PF X7R 1005
C2	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C3	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C4	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C5	1-114-507-11 s	CAP, CERAMIC 1UF X7R
C7	1-112-775-11 s	CAP, CERAMIC 2200PF X7R 1005
C8	1-112-775-11 s	CAP, CERAMIC 2200PF X7R 1005
C9	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C10	1-112-775-11 s	CAP, CERAMIC 2200PF X7R 1005
C11	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
CN1	1-770-629-21 s	PIN, CONNECTOR 12P
EN1	1-487-191-11 s	ENCODER, ROTARY
R4	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R10	1-218-990-81 s	CONDUCTOR, CHIP (1005)
RB1	1-234-375-21 s	RES, NETWORK 1K (1005X4)
RB2	1-234-375-21 s	RES, NETWORK 1K (1005X4)
RB3	1-234-373-21 s	RES, NETWORK 220 (1005X4)
RV1	1-227-244-11 s	RES, VAR, CARBON 5K/5K
S1	1-570-282-21 s	SWITCH, KEY BOARD
S2	1-762-124-21 s	SWITCH, TOGGLE
S3	1-762-531-21 s	SWITCH, TOGGLE

SW-1607 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1946-175-A s	MOUNTED CIRCUIT BOARD, SW-1607
C1	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C2	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005

SW-1607 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C3	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C4	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C5	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C6	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C7	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C8	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C9	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C10	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
CN1	1-770-628-21 s	PIN, CONNECTOR 11P
RB1	1-234-375-21 s	RES, NETWORK 1K (1005X4)
RB2	1-234-375-21 s	RES, NETWORK 1K (1005X4)
RB3	1-234-375-21 s	RES, NETWORK 1K (1005X4)
S1	1-762-123-21 s	SWITCH, TOGGLE
S2	1-762-123-21 s	SWITCH, TOGGLE
S3	1-762-123-21 s	SWITCH, TOGGLE
S4	1-762-019-21 s	SWITCH, TOGGLE
S5	1-762-489-21 s	SWITCH, TOGGLE

SW-1608 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1946-176-A s	MOUNTED CIRCUIT BOARD, SW-1608
C1	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
C2	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C3	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C4	1-112-775-11 s	CAP, CERAMIC 2200PF X7R 1005
C5	1-112-775-11 s	CAP, CERAMIC 2200PF X7R 1005
C6	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C7	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C8	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C9	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C10	1-112-775-11 s	CAP, CERAMIC 2200PF X7R 1005
C11	1-112-775-11 s	CAP, CERAMIC 2200PF X7R 1005
C12	1-112-775-11 s	CAP, CERAMIC 2200PF X7R 1005
C13	1-112-775-11 s	CAP, CERAMIC 2200PF X7R 1005
C14	1-114-507-11 s	CAP, CERAMIC 1UF X7R
C15	1-114-507-11 s	CAP, CERAMIC 1UF X7R
C16	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
C17	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C18	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C20	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C21	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C22	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
C23	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C24	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C25	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C26	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C27	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
CN1	1-785-840-31 s	CONNECTOR, FFC/FPC(ZIF) AN 15P
EN1	1-480-630-11 s	ENCODER, ROTARY
IC1	6-713-118-01 s	IC PCA9554BS-T
IC2	6-713-118-01 s	IC PCA9554BS-T
R2	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R3	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R4	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R5	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R6	1-218-990-81 s	CONDUCTOR, CHIP (1005)
RB1	1-234-371-21 s	RES, NETWORK 47 (1005X4)

SW-1608 BOARD

Ref. No. or Q'ty	Part No.	SP Description
RB2	1-234-375-21 s	RES, NETWORK 1K (1005X4)
RB3	1-234-375-21 s	RES, NETWORK 1K (1005X4)
RB4	1-234-375-21 s	RES, NETWORK 1K (1005X4)
RB5	1-234-373-21 s	RES, NETWORK 220 (1005X4)
RB6	1-234-375-21 s	RES, NETWORK 1K (1005X4)
RB7	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB8	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RV1	1-237-696-11 s	RES, VAR, CARBON 5K
RV2	1-237-696-11 s	RES, VAR, CARBON 5K
RV3	1-237-696-11 s	RES, VAR, CARBON 5K
S1	1-786-725-21 s	SWITCH, TACTILE
S2	1-786-725-21 s	SWITCH, TACTILE
S3	1-771-316-21 s	SWITCH, TOGGLE
S4	1-771-316-21 s	SWITCH, TOGGLE
S5	1-786-725-21 s	SWITCH, TACTILE
S6	1-771-316-21 s	SWITCH, TOGGLE
S7	1-570-608-11 s	SWITCH, TOGGLE

SW-1608A BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1974-765-A s	MOUNTED CIRCUIT BOARD, SW-1608A
C1	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
C2	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C3	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C4	1-112-775-11 s	CAP, CERAMIC 2200PF X7R 1005
C5	1-112-775-11 s	CAP, CERAMIC 2200PF X7R 1005
C6	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C7	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C8	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C9	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C10	1-112-775-11 s	CAP, CERAMIC 2200PF X7R 1005
C11	1-112-775-11 s	CAP, CERAMIC 2200PF X7R 1005
C12	1-112-775-11 s	CAP, CERAMIC 2200PF X7R 1005
C13	1-112-775-11 s	CAP, CERAMIC 2200PF X7R 1005
C14	1-114-507-11 s	CAP, CERAMIC 1UF X7R
C15	1-114-507-11 s	CAP, CERAMIC 1UF X7R
C16	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
C17	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C18	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C20	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C21	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C22	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
C23	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C24	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C25	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C26	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C27	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
CN1	1-785-840-31 s	CONNECTOR, FFC/FPC(ZIF) AN 15P
EN1	1-480-630-11 s	ENCODER, ROTARY
IC1	6-713-118-01 s	IC PCA9554BS-T
IC2	6-713-118-01 s	IC PCA9554BS-T
R1	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R2	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R3	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R4	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R5	1-218-990-81 s	CONDUCTOR, CHIP (1005)

SW-1608A BOARD

Ref. No. or Q'ty	Part No.	SP Description
R6	1-218-990-81 s	CONDUCTOR, CHIP (1005)
RB1	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB2	1-234-375-21 s	RES, NETWORK 1K (1005X4)
RB3	1-234-375-21 s	RES, NETWORK 1K (1005X4)
RB4	1-234-375-21 s	RES, NETWORK 1K (1005X4)
RB5	1-234-373-21 s	RES, NETWORK 220 (1005X4)
RB6	1-234-375-21 s	RES, NETWORK 1K (1005X4)
RB7	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB8	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RV1	1-237-696-11 s	RES, VAR, CARBON 5K
RV2	1-237-696-11 s	RES, VAR, CARBON 5K
RV3	1-237-696-11 s	RES, VAR, CARBON 5K
RV4	1-237-696-11 s	RES, VAR, CARBON 5K
RV5	1-237-696-11 s	RES, VAR, CARBON 5K
S1	1-786-725-21 s	SWITCH, TACTILE
S2	1-786-725-21 s	SWITCH, TACTILE
S3	1-771-316-21 s	SWITCH, TOGGLE
S4	1-771-316-21 s	SWITCH, TOGGLE
S5	1-786-725-21 s	SWITCH, TACTILE
S6	1-771-316-21 s	SWITCH, TOGGLE
S7	1-570-608-11 s	SWITCH, TOGGLE

SW-1609 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1946-177-A s	MOUNTED CIRCUIT BOARD, SW-1609
C1	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C2	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C3	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C4	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C5	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C6	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
CN1	1-770-623-21 s	PIN, CONNECTOR 6P
D1	6-502-598-01 s	DI SML-D12U8WT86
D2	6-501-358-01 s	DIODE CL-197HG5-CD-T
R1	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R2	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R3	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R4	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R5	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
S1	1-771-316-21 s	SWITCH, TOGGLE

SY-430 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1969-512-A s	MOUNTED CIRCUIT BOARD, SY-430
3pcs	3-729-061-02 s	SCREW (M2) (TYPE 1)
BT301	△ 1-251-928-21 s	SOCKET, BATTERY
C1	1-100-597-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C2	1-100-597-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C3	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C4	1-135-960-91 s	CAP, CHIP CERAMIC 10MF B(3225)
C5	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C6	1-100-597-91 s	CAP, CHIP CERAMIC 0.1MF B 1608

SY-430 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C7	1-135-960-91 s	CAP, CHIP CERAMIC 10MF B(3225)
C8	1-100-597-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C10	1-100-597-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C11	1-135-960-91 s	CAP, CHIP CERAMIC 10MF B(3225)
C12	1-100-597-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C13	1-135-960-91 s	CAP, CHIP CERAMIC 10MF B(3225)
C14	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C15	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C18	1-100-597-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C19	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
C20	1-100-597-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C22	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C24	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C101	1-135-960-91 s	CAP, CHIP CERAMIC 10MF B(3225)
C102	1-112-015-91 s	CAP, CHIP CERAMIC 47MF B 3225
C103	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C104	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C105	1-112-015-91 s	CAP, CHIP CERAMIC 47MF B 3225
C106	1-100-597-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C107	1-112-015-91 s	CAP, CHIP CERAMIC 47MF B 3225
C108	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C109	1-100-597-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C110	1-100-055-21 s	CAP, CHIP CERAMIC 22MF B 3225
C111	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C112	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C113	1-112-298-91 s	CAP, CERAMIC 1MF B (1608)
C114	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C115	1-100-055-21 s	CAP, CHIP CERAMIC 22MF B 3225
C116	1-100-055-21 s	CAP, CHIP CERAMIC 22MF B 3225
C117	1-100-055-21 s	CAP, CHIP CERAMIC 22MF B 3225
C118	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C119	1-112-298-91 s	CAP, CERAMIC 1MF B (1608)
C120	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C121	1-112-298-91 s	CAP, CERAMIC 1MF B (1608)
C122	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C123	1-112-015-91 s	CAP, CHIP CERAMIC 47MF B 3225
C124	1-112-015-91 s	CAP, CHIP CERAMIC 47MF B 3225
C125	1-100-597-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C127	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C128	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C129	1-112-015-91 s	CAP, CHIP CERAMIC 47MF B 3225
C130	1-112-015-91 s	CAP, CHIP CERAMIC 47MF B 3225
C131	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C132	1-112-015-91 s	CAP, CHIP CERAMIC 47MF B 3225
C133	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C135	1-112-815-91 s	CAP, CERAMIC 10MF C (1608)
C136	1-112-015-91 s	CAP, CHIP CERAMIC 47MF B 3225
C137	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C139	1-112-015-91 s	CAP, CHIP CERAMIC 47MF B 3225
C140	1-164-935-81 s	CAP, CHIP CERAMIC 470PF B 1005
C141	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C142	1-135-960-91 s	CAP, CHIP CERAMIC 10MF B(3225)
C143	1-112-015-91 s	CAP, CHIP CERAMIC 47MF B 3225
C144	1-135-960-91 s	CAP, CHIP CERAMIC 10MF B(3225)
C145	1-135-960-91 s	CAP, CHIP CERAMIC 10MF B(3225)
C146	1-112-298-91 s	CAP, CERAMIC 1MF B (1608)
C147	1-112-298-91 s	CAP, CERAMIC 1MF B (1608)
C148	1-135-960-91 s	CAP, CHIP CERAMIC 10MF B(3225)
C149	1-100-581-81 s	CAP,CHIP CERAMIC0.0047MF B1005
C150	1-135-960-91 s	CAP, CHIP CERAMIC 10MF B(3225)
C151	1-100-581-81 s	CAP,CHIP CERAMIC0.0047MF B1005
C152	1-164-866-81 s	CAP, CHIP CERAMIC 47PF CH 1005
C153	1-164-866-81 s	CAP, CHIP CERAMIC 47PF CH 1005
C154	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
C155	1-116-082-11 s	CAP, CHIP ELECT 47MF (6.3X7.7)

SY-430 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C156	1-114-507-11 s	CAP, CERAMIC 1UF X7R
C157	1-114-507-11 s	CAP, CERAMIC 1UF X7R
C159	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
C160	1-116-082-11 s	CAP, CHIP ELECT 47MF (6.3X7.7)
C161	1-114-160-91 s	CAP, CHIP CERAMIC 1MF B 3225
C162	1-114-160-91 s	CAP, CHIP CERAMIC 1MF B 3225
C163	1-114-507-11 s	CAP, CERAMIC 1UF X7R
C164	1-114-160-91 s	CAP, CHIP CERAMIC 1MF B 3225
C165	1-114-160-91 s	CAP, CHIP CERAMIC 1MF B 3225
C166	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C167	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C301	1-112-746-91 s	CAP, CERAMIC 4.7MF B (1608)
C302	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C303	1-112-815-91 s	CAP, CERAMIC 10MF C (1608)
C304	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C305	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C306	1-112-815-91 s	CAP, CERAMIC 10MF C (1608)
C307	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C310	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C311	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C312	1-114-386-11 s	CAP, NIOBIUM ELECT 100MF 105
C313	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C314	1-112-746-91 s	CAP, CERAMIC 4.7MF B (1608)
C315	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C316	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C317	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C318	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C321	1-100-611-91 s	CAP, CERAMIC 22MF C (2012)
C322	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C323	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C325	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C326	1-100-611-91 s	CAP, CERAMIC 22MF C (2012)
C327	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C328	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C329	1-119-923-81 s	CAP, CERAMIC 0.047MF B 1005
C330	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C331	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C332	1-100-880-91 s	CAP, CERAMIC 100MF C (3225)
C333	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C334	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C335	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C424	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C425	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C427	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C428	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C429	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C502	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C503	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C504	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C505	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C506	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C507	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C508	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C509	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C510	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C512	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C514	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C515	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C516	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C517	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C518	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C519	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C521	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C522	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C523	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005

SY-430 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C524	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C525	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C603	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C604	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C605	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C606	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C609	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C610	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C611	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C614	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C625	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C626	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C627	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C628	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C629	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C630	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C631	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C632	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C633	1-164-939-81 s	CAP, CHIP CERAMIC 2200PF B 1005
C634	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C638	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C639	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C640	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C701	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C702	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C703	1-112-815-91 s	CAP, CERAMIC 10MF C (1608)
C704	1-112-815-91 s	CAP, CERAMIC 10MF C (1608)
C705	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C706	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C707	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C708	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C709	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C710	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C711	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C712	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C713	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C714	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C715	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C716	1-112-815-91 s	CAP, CERAMIC 10MF C (1608)
C717	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C718	1-164-858-81 s	CAP, CHIP CERAMIC 22PF CH 1005
C719	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C720	1-164-850-81 s	CAP, CHIP CERAMIC 10PF CH 1005
C722	1-164-858-81 s	CAP, CHIP CERAMIC 22PF CH 1005
C723	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C801	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C802	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C803	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C804	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C805	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C806	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C807	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C808	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C809	1-112-815-91 s	CAP, CERAMIC 10MF C (1608)
C810	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C811	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C814	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C815	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C816	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C817	1-127-956-21 s	CAP, CHIP FILM 0.1MF (3225)
C818	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C819	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C820	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C821	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C822	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005

SY-430 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C1238	1-112-815-91 s	CAP, CERAMIC 10MF C (1608)
C1239	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1240	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1241	1-112-815-91 s	CAP, CERAMIC 10MF C (1608)
C1242	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1243	1-112-815-91 s	CAP, CERAMIC 10MF C (1608)
C1244	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1245	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1246	1-112-815-91 s	CAP, CERAMIC 10MF C (1608)
C1247	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1248	1-112-815-91 s	CAP, CERAMIC 10MF C (1608)
C1249	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1251	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1252	1-164-845-81 s	CAP, CHIP CERAMIC 5PF CH 1005
C1253	1-164-840-81 s	CAP, CHIP CERAMIC 1PF CK 1005
C1254	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1255	1-164-845-81 s	CAP, CHIP CERAMIC 5PF CH 1005
C1256	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1260	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1261	1-112-015-91 s	CAP, CHIP CERAMIC 47MF B 3225
C1262	1-112-015-91 s	CAP, CHIP CERAMIC 47MF B 3225
C1263	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1266	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C1267	1-164-854-81 s	CAP, CHIP CERAMIC 15PF CH 1005
C1268	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C1270	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1271	1-112-815-91 s	CAP, CERAMIC 10MF C (1608)
C1272	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C1273	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C1274	1-112-815-91 s	CAP, CERAMIC 10MF C (1608)
C1275	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1276	1-164-840-81 s	CAP, CHIP CERAMIC 1PF CK 1005
C1278	1-112-015-91 s	CAP, CHIP CERAMIC 47MF B 3225
C1279	1-112-015-91 s	CAP, CHIP CERAMIC 47MF B 3225
C1281	1-112-015-91 s	CAP, CHIP CERAMIC 47MF B 3225
C1282	1-112-015-91 s	CAP, CHIP CERAMIC 47MF B 3225
C1303	1-112-015-91 s	CAP, CHIP CERAMIC 47MF B 3225
C1304	1-112-015-91 s	CAP, CHIP CERAMIC 47MF B 3225
C1305	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C1306	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C1307	1-164-840-81 s	CAP, CHIP CERAMIC 1PF CK 1005
C1308	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1309	1-164-862-81 s	CAP, CHIP CERAMIC 33PF CH 1005
C1310	1-164-860-81 s	CAP, CHIP CERAMIC 27PF CH 1005
C1311	1-164-862-81 s	CAP, CHIP CERAMIC 33PF CH 1005
C1312	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1313	1-112-815-91 s	CAP, CERAMIC 10MF C (1608)
C1314	1-112-815-91 s	CAP, CERAMIC 10MF C (1608)
C1315	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1316	1-112-015-91 s	CAP, CHIP CERAMIC 47MF B 3225
C1317	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1318	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1319	1-112-015-91 s	CAP, CHIP CERAMIC 47MF B 3225
C1322	1-164-850-81 s	CAP, CHIP CERAMIC 10PF CH 1005
C1323	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1324	1-164-845-81 s	CAP, CHIP CERAMIC 5PF CH 1005
C1325	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1327	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1328	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1329	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C1330	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C1331	1-100-597-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C1334	1-112-815-91 s	CAP, CERAMIC 10MF C (1608)
C1335	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1336	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005

SY-430 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C1337	1-100-573-81 s	CAP,CHIP CERAMIC 390PF B 1005
C1338	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1339	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C1340	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1341	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1342	1-112-815-91 s	CAP, CERAMIC 10MF C (1608)
C1343	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1344	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1345	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1346	1-164-880-81 s	CAP,CHIP CERAMIC 180PF CH 1005
C1411	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C1412	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1417	1-116-045-91 s	CAP, CERAMIC 4.7MF B 2012
C1418	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1419	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1420	1-116-045-91 s	CAP, CERAMIC 4.7MF B 2012
C1423	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1424	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1425	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1428	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1501	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C1502	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C1503	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C1504	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1505	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C1506	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1507	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C1508	1-114-419-21 s	CAP, CERAMIC 10MF B (2012)
C1509	1-114-419-21 s	CAP, CERAMIC 10MF B (2012)
C1510	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1511	1-165-884-91 s	CAP, CERAMIC 2.2MF (1608)
C1512	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1513	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C1514	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C1515	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C1516	1-112-815-91 s	CAP, CERAMIC 10MF C (1608)
C1517	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C1518	1-164-937-81 s	CAP, CHIP CERAMIC 1000PF B 1005
C1519	1-164-937-81 s	CAP, CHIP CERAMIC 1000PF B 1005
C1520	1-164-935-81 s	CAP, CHIP CERAMIC 470PF B 1005
C1521	1-164-935-81 s	CAP, CHIP CERAMIC 470PF B 1005
C1525	1-165-884-91 s	CAP, CERAMIC 2.2MF (1608)
C1527	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C1529	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C1531	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1532	1-100-415-91 s	CAP, CHIP CERAMIC 0.47MF (1005)
C1533	1-100-415-91 s	CAP, CHIP CERAMIC 0.47MF (1005)
C1534	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C1535	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1536	1-112-815-91 s	CAP, CERAMIC 10MF C (1608)
C1537	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1538	1-165-884-91 s	CAP, CERAMIC 2.2MF (1608)
C1539	1-112-815-91 s	CAP, CERAMIC 10MF C (1608)
C1540	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C1541	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C1544	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C1545	1-164-935-81 s	CAP, CHIP CERAMIC 470PF B 1005
C1546	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C1547	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C1548	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C1549	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C1550	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C1551	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C1553	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C1554	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005

SY-430 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C1555	1-164-939-81 s	CAP, CHIP CERAMIC 2200PF B 1005
C1556	1-164-939-81 s	CAP, CHIP CERAMIC 2200PF B 1005
C1557	1-164-935-81 s	CAP, CHIP CERAMIC 470PF B 1005
C1558	1-164-935-81 s	CAP, CHIP CERAMIC 470PF B 1005
C1559	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C1560	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C1561	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C1562	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C1563	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1564	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1565	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1566	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C1567	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C1568	1-114-419-21 s	CAP, CERAMIC 10MF B (2012)
C1569	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C1570	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C1571	1-126-396-21 s	CAP, CHIP ELECT 47MF (6.3X5.7)
C1572	1-126-396-21 s	CAP, CHIP ELECT 47MF (6.3X5.7)
C1575	1-100-055-21 s	CAP, CHIP CERAMIC 22MF B 3225
C1587	1-165-884-91 s	CAP, CERAMIC 2.2MF (1608)
C1601	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1614	1-100-415-91 s	CAP, CHIP CERAMIC 0.47MF(1005)
C1615	1-100-415-91 s	CAP, CHIP CERAMIC 0.47MF(1005)
C1616	1-112-815-91 s	CAP, CERAMIC 10MF C (1608)
C1617	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1618	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C1619	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1620	1-165-884-91 s	CAP, CERAMIC 2.2MF (1608)
C1621	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C1622	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C1623	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C1624	1-164-935-81 s	CAP, CHIP CERAMIC 470PF B 1005
C1625	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1626	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C1627	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C1628	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C1629	1-164-935-81 s	CAP, CHIP CERAMIC 470PF B 1005
C1630	1-164-935-81 s	CAP, CHIP CERAMIC 470PF B 1005
C1631	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1632	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C1633	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C1634	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1635	1-115-153-21 s	CAP, ELECT 4.7MF
C1636	1-115-153-21 s	CAP, ELECT 4.7MF
C1637	1-164-935-81 s	CAP, CHIP CERAMIC 470PF B 1005
C1638	1-164-935-81 s	CAP, CHIP CERAMIC 470PF B 1005
C1639	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C1640	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C1641	1-114-419-21 s	CAP, CERAMIC 10MF B (2012)
C1642	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C1643	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C1644	1-126-396-21 s	CAP, CHIP ELECT 47MF (6.3X5.7)
C1645	1-126-396-21 s	CAP, CHIP ELECT 47MF (6.3X5.7)
C1648	1-100-055-21 s	CAP, CHIP CERAMIC 22MF B 3225
C1803	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1805	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1808	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1813	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C1815	1-114-214-81 s	CAP,CHIP CERAMIC470PF CH1005
C1817	1-112-298-91 s	CAP, CERAMIC 1MF B (1608)
C1819	1-112-298-91 s	CAP, CERAMIC 1MF B (1608)
C1824	1-112-815-91 s	CAP, CERAMIC 10MF C (1608)
C1825	1-112-815-91 s	CAP, CERAMIC 10MF C (1608)
C1830	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C1833	1-112-298-91 s	CAP, CERAMIC 1MF B (1608)

SY-430 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C1836	1-119-923-81 s	CAP, CERAMIC 0.047MF B 1005
C1837	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C1841	1-164-939-81 s	CAP, CHIP CERAMIC 2200PF B 1005
C1850	1-112-815-91 s	CAP, CERAMIC 10MF C (1608)
C1854	1-112-298-91 s	CAP, CERAMIC 1MF B (1608)
C1855	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C1859	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1901	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C1902	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C1903	1-164-939-81 s	CAP, CHIP CERAMIC 2200PF B 1005
C1904	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1905	1-100-055-21 s	CAP, CHIP CERAMIC 22MF B 3225
C1906	1-100-055-21 s	CAP, CHIP CERAMIC 22MF B 3225
C1907	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1908	1-117-145-21 s	CAP, ELECT 1MF
C1909	1-117-145-21 s	CAP, ELECT 1MF
C1910	1-114-419-21 s	CAP, CERAMIC 10MF B (2012)
C1912	1-164-866-81 s	CAP, CHIP CERAMIC 47PF CH 1005
C1913	1-164-876-81 s	CAP,CHIP CERAMIC 120PF CH 1005
C1914	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1915	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1916	1-164-882-81 s	CAP,CHIP CERAMIC 220PF CH 1005
C1917	1-115-459-21 s	CAP, ELECT 47MF
C1918	1-164-882-81 s	CAP,CHIP CERAMIC 220PF CH 1005
C1919	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C1920	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C1921	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1922	1-164-876-81 s	CAP,CHIP CERAMIC 120PF CH 1005
C1924	1-127-956-21 s	CAP, CHIP FILM 0.1MF (3225)
C1925	1-112-815-91 s	CAP, CERAMIC 10MF C (1608)
C1926	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1929	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1931	1-112-298-91 s	CAP, CERAMIC 1MF B (1608)
C1932	1-112-298-91 s	CAP, CERAMIC 1MF B (1608)
C1933	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C1934	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C1936	1-112-015-91 s	CAP, CHIP CERAMIC 47MF B 3225
C1938	1-112-298-91 s	CAP, CERAMIC 1MF B (1608)
C1939	1-114-214-81 s	CAP,CHIP CERAMIC470PF CH1005
C1940	1-164-866-81 s	CAP, CHIP CERAMIC 47PF CH 1005
C1941	1-164-866-81 s	CAP, CHIP CERAMIC 47PF CH 1005
C1942	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
C1944	1-100-055-21 s	CAP, CHIP CERAMIC 22MF B 3225
C1945	1-126-405-21 s	CAP, CHIP ELECT 10MF (6.3X5.7)
C1947	1-126-396-21 s	CAP, CHIP ELECT 47MF (6.3X5.7)
C1948	1-100-055-21 s	CAP, CHIP CERAMIC 22MF B 3225
C1949	1-112-815-91 s	CAP, CERAMIC 10MF C (1608)
C1950	1-112-791-11 s	CAP, ELECT 100MF
C1951	1-126-396-21 s	CAP, CHIP ELECT 47MF (6.3X5.7)
C1952	1-112-015-91 s	CAP, CHIP CERAMIC 47MF B 3225
C1953	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
C1954	1-112-015-91 s	CAP, CHIP CERAMIC 47MF B 3225
C1955	1-114-214-81 s	CAP,CHIP CERAMIC470PF CH1005
C1956	1-112-800-11 s	CAP, ELECT 100MF
C1957	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1958	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1959	1-100-415-91 s	CAP, CHIP CERAMIC 0.47MF(1005)
C1960	1-100-415-91 s	CAP, CHIP CERAMIC 0.47MF(1005)
C2001	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C2002	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C2005	1-164-935-81 s	CAP, CHIP CERAMIC 470PF B 1005
C2006	1-164-935-81 s	CAP, CHIP CERAMIC 470PF B 1005
C2007	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C2008	1-117-145-21 s	CAP, ELECT 1MF
C2009	1-117-145-21 s	CAP, ELECT 1MF

SY-430 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C2010	1-164-935-81 s	CAP, CHIP CERAMIC 470PF B 1005
C2011	1-164-935-81 s	CAP, CHIP CERAMIC 470PF B 1005
C2012	1-117-145-21 s	CAP, ELECT 1MF
C2013	1-117-145-21 s	CAP, ELECT 1MF
C2014	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C2015	1-114-419-21 s	CAP, CERAMIC 10MF B (2012)
C2016	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C2017	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C2018	1-164-876-81 s	CAP,CHIP CERAMIC 120PF CH 1005
C2019	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C2020	1-164-882-81 s	CAP,CHIP CERAMIC 220PF CH 1005
C2021	1-115-459-21 s	CAP, ELECT 47MF
C2022	1-164-882-81 s	CAP,CHIP CERAMIC 220PF CH 1005
C2023	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C2024	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C2025	1-164-876-81 s	CAP,CHIP CERAMIC 120PF CH 1005
C2026	1-127-956-21 s	CAP, CHIP FILM 0.1MF (3225)
C2027	1-112-015-91 s	CAP, CHIP CERAMIC 47MF B 3225
C2028	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C2029	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C2030	1-126-405-21 s	CAP, CHIP ELECT 10MF (6.3X5.7)
C2031	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
C2032	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C2033	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C2036	1-162-923-91 s	CAP, CERAMIC 47PF CH 1608
C2037	1-162-923-91 s	CAP, CERAMIC 47PF CH 1608
C2039	1-117-145-21 s	CAP, ELECT 1MF
C2045	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C2046	1-114-419-21 s	CAP, CERAMIC 10MF B (2012)
C2047	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C2048	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C2049	1-164-876-81 s	CAP,CHIP CERAMIC 120PF CH 1005
C2050	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C2051	1-164-882-81 s	CAP,CHIP CERAMIC 220PF CH 1005
C2052	1-115-459-21 s	CAP, ELECT 47MF
C2053	1-164-882-81 s	CAP,CHIP CERAMIC 220PF CH 1005
C2054	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C2055	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C2056	1-164-876-81 s	CAP,CHIP CERAMIC 120PF CH 1005
C2057	1-127-956-21 s	CAP, CHIP FILM 0.1MF (3225)
C2058	1-112-015-91 s	CAP, CHIP CERAMIC 47MF B 3225
C2059	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C2060	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C2061	1-164-850-81 s	CAP, CHIP CERAMIC 10PF CH 1005
C2062	1-164-850-81 s	CAP, CHIP CERAMIC 10PF CH 1005
C2063	1-117-145-21 s	CAP, ELECT 1MF
C2064	1-162-923-91 s	CAP, CERAMIC 47PF CH 1608
CN1	1-816-755-21 s	CONNECTOR (SM20B-SRSS-TB)
CN2	1-770-622-21 s	PIN, CONNECTOR 5P
CN3	1-819-577-21 s	PIN, CONNECTOR (PC BOARD) 15P
CN4	1-770-623-21 s	PIN, CONNECTOR 6P
CN5	1-785-840-31 s	CONNECTOR, FFC/FPC(ZIF) AN 15P
CN7	1-770-625-21 s	PIN, CONNECTOR 8P
CN8	1-774-260-31 s	CONNECTOR, FFC/FPC(ZIF) AN 20P
CN9	1-778-645-31 s	CONNECTOR, FFC/FPC(ZIF) AN 10P
CN10	1-770-626-21 s	PIN, CONNECTOR 9P
CN11	1-819-577-21 s	PIN, CONNECTOR (PC BOARD) 15P
CN12	1-770-624-21 s	PIN, CONNECTOR 7P
CN102	1-794-340-21 s	CONNECTOR, BOARD TO BOARD 120P
CN103	1-770-620-21 s	PIN, CONNECTOR 3P
CN201	1-774-260-31 s	CONNECTOR, FFC/FPC(ZIF) AN 20P
CN204	1-770-620-21 s	PIN, CONNECTOR 3P
CN206	1-784-254-21 s	CONNECTOR 10P
D1	6-501-123-01 s	DIODE RB160M-60TR

SY-430 BOARD

Ref. No. or Q'ty	Part No.	SP Description
D2	8-719-069-59 s	DI UDZSUSTE-178.2B
D101	8-719-083-60 s	DI UDZSUSTE-174.7B
D102	8-719-083-60 s	DI UDZSUSTE-174.7B
D103	8-719-083-83 s	DI UDZSUSTE-1715B
D106	8-719-083-83 s	DI UDZSUSTE-1715B
D107	8-719-083-60 s	DI UDZSUSTE-174.7B
D108	8-719-083-60 s	DI UDZSUSTE-174.7B
D109	8-719-083-60 s	DI UDZSUSTE-174.7B
D110	8-719-024-71 s	DIODE 1SS362-TE85L
D111	6-502-197-01 s	DI SML-D12M8WT86SM
D112	6-502-598-01 s	DI SML-D12U8WT86
D113	8-719-056-48 s	DI 1SS388
D114	8-719-056-48 s	DI 1SS388
D115	6-501-123-01 s	DIODE RB160M-60TR
D116	8-719-072-43 s	DIODE RB050L-40TE25
D117	6-501-123-01 s	DIODE RB160M-60TR
D118	6-501-123-01 s	DIODE RB160M-60TR
D301	6-502-197-01 s	DI SML-D12M8WT86SM
D302	8-719-024-71 s	DIODE 1SS362-TE85L
D303	8-719-024-71 s	DIODE 1SS362-TE85L
D603	8-719-024-71 s	DIODE 1SS362-TE85L
D604	8-719-024-71 s	DIODE 1SS362-TE85L
D605	8-719-024-71 s	DIODE 1SS362-TE85L
D606	8-719-989-04 s	DIODE DAN222-TL
D701	8-719-024-71 s	DIODE 1SS362-TE85L
D702	8-719-024-71 s	DIODE 1SS362-TE85L
D801	8-719-024-71 s	DIODE 1SS362-TE85L
D802	8-719-056-65 s	DIODE 1SS372-TE85L
D803	8-719-056-65 s	DIODE 1SS372-TE85L
D804	8-719-024-71 s	DIODE 1SS362-TE85L
D805	8-719-024-71 s	DIODE 1SS362-TE85L
D806	8-719-024-71 s	DIODE 1SS362-TE85L
D807	8-719-083-60 s	DI UDZSUSTE-174.7B
D808	8-719-083-60 s	DI UDZSUSTE-174.7B
D809	8-719-056-48 s	DI 1SS388
D810	8-719-056-48 s	DI 1SS388
D811	8-719-024-71 s	DIODE 1SS362-TE85L
D812	8-719-024-71 s	DIODE 1SS362-TE85L
D1402	8-719-991-01 s	DIODE DAP222-TL
D1403	8-719-991-01 s	DIODE DAP222-TL
D1405	8-719-056-48 s	DI 1SS388
D1406	8-719-024-71 s	DIODE 1SS362-TE85L
D1407	8-719-024-71 s	DIODE 1SS362-TE85L
D1501	6-500-696-01 s	DI UDZSUSTE-173.0B
D1502	6-500-696-01 s	DI UDZSUSTE-173.0B
D1503	6-500-696-01 s	DI UDZSUSTE-173.0B
D1504	6-500-696-01 s	DI UDZSUSTE-173.0B
D1601	8-719-024-71 s	DIODE 1SS362-TE85L
D1901	8-719-024-71 s	DIODE 1SS362-TE85L
D1902	8-719-083-66 s	DI UDZSUSTE-1718B
D1903	8-719-083-66 s	DI UDZSUSTE-1718B
D1904	8-719-083-66 s	DI UDZSUSTE-1718B
D1905	8-719-083-66 s	DI UDZSUSTE-1718B
D1906	6-502-598-01 s	DI SML-D12U8WT86
D2003	8-719-024-71 s	DIODE 1SS362-TE85L
D2004	8-719-024-71 s	DIODE 1SS362-TE85L
D2005	8-719-024-71 s	DIODE 1SS362-TE85L
D2006	8-719-024-71 s	DIODE 1SS362-TE85L
D2009	8-719-024-71 s	DIODE 1SS362-TE85L
D2010	8-719-024-71 s	DIODE 1SS362-TE85L
D2011	8-719-024-71 s	DIODE 1SS362-TE85L
D2012	8-719-024-71 s	DIODE 1SS362-TE85L
D2013	8-719-989-04 s	DIODE DAN222-TL
D2014	8-719-989-04 s	DIODE DAN222-TL
D2015	8-719-989-04 s	DIODE DAN222-TL

SY-430 BOARD

Ref. No. or Q'ty	Part No.	SP Description
D2016	8-719-989-04 s	DIODE DAN222-TL
E1	1-535-877-22 s	CHIP, CHECKER
E2	1-535-877-22 s	CHIP, CHECKER
E4	1-535-877-22 s	CHIP, CHECKER
E5	1-535-877-22 s	CHIP, CHECKER
E6	1-535-877-22 s	CHIP, CHECKER
FB1	1-400-462-21 s	FERRITE, EMI (SMD) (1005)
FB2	1-414-772-21 s	FERRITE. EMI (SMD) (2012)
FB3	1-414-772-21 s	FERRITE. EMI (SMD) (2012)
FB4	1-400-832-21 s	SMD EMI FERRITE
FB5	1-400-832-21 s	SMD EMI FERRITE
FB8	1-400-832-21 s	SMD EMI FERRITE
FB9	1-400-832-21 s	SMD EMI FERRITE
FB10	1-414-772-21 s	FERRITE. EMI (SMD) (2012)
FB11	1-414-772-21 s	FERRITE. EMI (SMD) (2012)
FB12	1-400-832-21 s	SMD EMI FERRITE
FB13	1-400-832-21 s	SMD EMI FERRITE
FB14	1-400-832-21 s	SMD EMI FERRITE
FB15	1-400-832-21 s	SMD EMI FERRITE
FB16	1-400-832-21 s	SMD EMI FERRITE
FB17	1-400-832-21 s	SMD EMI FERRITE
FB18	1-400-832-21 s	SMD EMI FERRITE
FB19	1-400-832-21 s	SMD EMI FERRITE
FB20	1-400-832-21 s	SMD EMI FERRITE
FB21	1-400-832-21 s	SMD EMI FERRITE
FB22	1-400-832-21 s	SMD EMI FERRITE
FB23	1-400-832-21 s	SMD EMI FERRITE
FB24	1-400-832-21 s	SMD EMI FERRITE
FB25	1-400-832-21 s	SMD EMI FERRITE
FB26	1-400-832-21 s	SMD EMI FERRITE
FB27	1-400-832-21 s	SMD EMI FERRITE
FB28	1-400-832-21 s	SMD EMI FERRITE
FB29	1-400-832-21 s	SMD EMI FERRITE
FB30	1-400-832-21 s	SMD EMI FERRITE
FB31	1-400-832-21 s	SMD EMI FERRITE
FB32	1-400-832-21 s	SMD EMI FERRITE
FB33	1-400-832-21 s	SMD EMI FERRITE
FB34	1-400-832-21 s	SMD EMI FERRITE
FB35	1-400-832-21 s	SMD EMI FERRITE
FB36	1-400-832-21 s	SMD EMI FERRITE
FB37	1-400-832-21 s	SMD EMI FERRITE
FB38	1-400-832-21 s	SMD EMI FERRITE
FB39	1-400-832-21 s	SMD EMI FERRITE
FB40	1-400-832-21 s	SMD EMI FERRITE
FB42	1-414-772-21 s	FERRITE. EMI (SMD) (2012)
FB43	1-414-772-21 s	FERRITE. EMI (SMD) (2012)
FB67	1-400-832-21 s	SMD EMI FERRITE
FB68	1-400-832-21 s	SMD EMI FERRITE
FB70	1-400-832-21 s	SMD EMI FERRITE
FB71	1-400-832-21 s	SMD EMI FERRITE
FB72	1-400-462-21 s	FERRITE, EMI (SMD) (1005)
FB73	1-400-462-21 s	FERRITE, EMI (SMD) (1005)
FB74	1-400-462-21 s	FERRITE, EMI (SMD) (1005)
FB75	1-400-462-21 s	FERRITE, EMI (SMD) (1005)
FB76	1-414-772-21 s	FERRITE. EMI (SMD) (2012)
FB77	1-414-772-21 s	FERRITE. EMI (SMD) (2012)
FB78	1-400-832-21 s	SMD EMI FERRITE
FB79	1-400-832-21 s	SMD EMI FERRITE
FB80	1-400-832-21 s	SMD EMI FERRITE
FB81	1-400-832-21 s	SMD EMI FERRITE
FB83	1-400-832-21 s	SMD EMI FERRITE
FB84	1-400-832-21 s	SMD EMI FERRITE
FB85	1-400-462-21 s	FERRITE, EMI (SMD) (1005)
FB86	1-400-462-21 s	FERRITE, EMI (SMD) (1005)
FB87	1-400-462-21 s	FERRITE, EMI (SMD) (1005)

SY-430 BOARD

Ref. No. or Q'ty	Part No.	SP Description
FB88	1-400-462-21 s	FERRITE, EMI (SMD) (1005)
FB89	1-400-462-21 s	FERRITE, EMI (SMD) (1005)
FB90	1-400-462-21 s	FERRITE, EMI (SMD) (1005)
FB91	1-400-832-21 s	SMD EMI FERRITE
FB92	1-400-832-21 s	SMD EMI FERRITE
FB93	1-400-832-21 s	SMD EMI FERRITE
FB94	1-400-832-21 s	SMD EMI FERRITE
FB95	1-400-832-21 s	SMD EMI FERRITE
FB96	1-400-832-21 s	SMD EMI FERRITE
FB97	1-400-832-21 s	SMD EMI FERRITE
FB98	1-400-832-21 s	SMD EMI FERRITE
FB101	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB102	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB103	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB104	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB105	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB106	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB107	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB108	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB109	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB110	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB111	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB112	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB151	1-400-832-21 s	SMD EMI FERRITE
FB303	1-400-832-21 s	SMD EMI FERRITE
FB304	1-400-832-21 s	SMD EMI FERRITE
FB305	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB306	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB307	1-400-832-21 s	SMD EMI FERRITE
FB308	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB309	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB310	1-400-832-21 s	SMD EMI FERRITE
FB601	1-400-832-21 s	SMD EMI FERRITE
FB701	1-414-772-21 s	FERRITE. EMI (SMD) (2012)
FB702	1-414-772-21 s	FERRITE. EMI (SMD) (2012)
FB703	1-414-772-21 s	FERRITE. EMI (SMD) (2012)
FB704	1-414-772-21 s	FERRITE. EMI (SMD) (2012)
FB705	1-414-772-21 s	FERRITE. EMI (SMD) (2012)
FB706	1-414-772-21 s	FERRITE. EMI (SMD) (2012)
FB707	1-400-462-21 s	FERRITE, EMI (SMD) (1005)
FB801	1-414-772-21 s	FERRITE. EMI (SMD) (2012)
FB1001	1-400-832-21 s	SMD EMI FERRITE
FB1002	1-400-832-21 s	SMD EMI FERRITE
FB1003	1-414-445-21 s	FERRITE, EMI (SMD) (1608)
FB1101	1-400-832-21 s	SMD EMI FERRITE
FB1102	1-400-462-21 s	FERRITE, EMI (SMD) (1005)
FB1103	1-400-462-21 s	FERRITE, EMI (SMD) (1005)
FB1104	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB1105	1-400-462-21 s	FERRITE, EMI (SMD) (1005)
FB1106	1-400-462-21 s	FERRITE, EMI (SMD) (1005)
FB1107	1-400-462-21 s	FERRITE, EMI (SMD) (1005)
FB1108	1-400-462-21 s	FERRITE, EMI (SMD) (1005)
FB1109	1-400-462-21 s	FERRITE, EMI (SMD) (1005)
FB1110	1-400-462-21 s	FERRITE, EMI (SMD) (1005)
FB1111	1-400-462-21 s	FERRITE, EMI (SMD) (1005)
FB1112	1-400-462-21 s	FERRITE, EMI (SMD) (1005)
FB1200	1-400-462-21 s	FERRITE, EMI (SMD) (1005)
FB1201	1-400-832-21 s	SMD EMI FERRITE
FB1202	1-400-832-21 s	SMD EMI FERRITE
FB1203	1-400-832-21 s	SMD EMI FERRITE
FB1205	1-400-832-21 s	SMD EMI FERRITE
FB1206	1-400-832-21 s	SMD EMI FERRITE
FB1207	1-400-832-21 s	SMD EMI FERRITE
FB1209	1-400-832-21 s	SMD EMI FERRITE
FB1210	1-400-832-21 s	SMD EMI FERRITE

SY-430 BOARD

Ref. No. or Q'ty	Part No.	SP Description
FB1211	1-400-832-21 s	SMD EMI FERRITE
FB1212	1-400-832-21 s	SMD EMI FERRITE
FB1213	1-400-832-21 s	SMD EMI FERRITE
FB1214	1-400-832-21 s	SMD EMI FERRITE
FB1215	1-400-832-21 s	SMD EMI FERRITE
FB1216	1-400-832-21 s	SMD EMI FERRITE
FB1217	1-400-832-21 s	SMD EMI FERRITE
FB1218	1-400-832-21 s	SMD EMI FERRITE
FB1219	1-400-832-21 s	SMD EMI FERRITE
FB1220	1-400-832-21 s	SMD EMI FERRITE
FB1221	1-400-832-21 s	SMD EMI FERRITE
FB1222	1-400-832-21 s	SMD EMI FERRITE
FB1223	1-400-832-21 s	SMD EMI FERRITE
FB1225	1-400-832-21 s	SMD EMI FERRITE
FB1226	1-400-832-21 s	SMD EMI FERRITE
FB1228	1-400-832-21 s	SMD EMI FERRITE
FB1229	1-400-832-21 s	SMD EMI FERRITE
FB1230	1-400-832-21 s	SMD EMI FERRITE
FB1233	1-414-445-21 s	FERRITE, EMI (SMD) (1608)
FB1234	1-414-445-21 s	FERRITE, EMI (SMD) (1608)
FB1301	1-414-445-21 s	FERRITE, EMI (SMD) (1608)
FB1302	1-414-445-21 s	FERRITE, EMI (SMD) (1608)
FB1303	1-400-832-21 s	SMD EMI FERRITE
FB1304	1-400-832-21 s	SMD EMI FERRITE
FB1305	1-400-832-21 s	SMD EMI FERRITE
FB1306	1-400-832-21 s	SMD EMI FERRITE
FB1307	1-400-832-21 s	SMD EMI FERRITE
FB1308	1-400-832-21 s	SMD EMI FERRITE
FB1309	1-400-832-21 s	SMD EMI FERRITE
FB1310	1-400-832-21 s	SMD EMI FERRITE
FB1501	1-400-832-21 s	SMD EMI FERRITE
FB1502	1-400-832-21 s	SMD EMI FERRITE
FB1901	1-400-832-21 s	SMD EMI FERRITE
FB2001	1-400-832-21 s	SMD EMI FERRITE
FL1201	1-813-543-11 s	FILTER, LOW PASS
FL1202	1-813-543-11 s	FILTER, LOW PASS
FL1203	1-813-544-11 s	FILTER, LOW PASS
FL1204	1-482-155-11 s	SMD EMI FILTER
FL1206	1-482-155-11 s	SMD EMI FILTER
FL1207	1-482-155-11 s	SMD EMI FILTER
FL1209	1-482-155-11 s	SMD EMI FILTER
FL1210	1-482-155-11 s	SMD EMI FILTER
FL1212	1-482-155-11 s	SMD EMI FILTER
FL1213	1-233-345-21 s	FILTER, LOW PASS (5.5MHZ)
FL1301	1-200-092-11 s	FILTER, LOW PASS
IC101	6-704-976-01 s	IC ADR381ARTZ-REEL7
IC102	6-706-220-01 s	IC LTC3411EMS#TR
IC103	6-705-480-01 s	IC LT3467ES6#TR
IC104	6-705-480-01 s	IC LT3467ES6#TR
IC105	6-712-135-01 o	IC R1173H001D-T1-FE
IC106	8-759-327-01 s	IC NJM062V (TE2)
IC107	8-759-327-01 s	IC NJM062V (TE2)
IC108	8-759-327-01 s	IC NJM062V (TE2)
IC109	8-759-598-43 s	IC TC7WH04FK
IC301	6-708-478-01 s	IC RX-8025NB
IC302	6-710-988-01 s	IC TC74VXC16843 (EL,F)
IC303	6-712-135-01 o	IC R1173H001D-T1-FE
IC305	8-759-598-44 s	IC TC7WH08FK
IC306	6-706-484-01 s	IC TC7SH04FU
IC307	6-712-135-01 o	IC R1173H001D-T1-FE
IC308	6-704-566-01 s	IC R3112N291A-TR-FE
IC309	8-759-656-54 s	IC TC7WH14FK
IC310	6-715-164-01 s	IC TPS2553DBVR
IC311	6-712-135-01 o	IC R1173H001D-T1-FE

SY-430 BOARD

Ref. No. or Q'ty	Part No.	SP Description
IC406	6-706-487-01 s	IC TC7SH08FU
IC409	6-600-060-01 s	IC TC7WZ32FK
IC410	6-600-060-01 s	IC TC7WZ32FK
IC501	6-706-487-01 s	IC TC7SH08FU
IC502	6-706-484-01 s	IC TC7SH04FU
IC503	8-759-656-54 s	IC TC7WH14FK
IC504	8-759-656-54 s	IC TC7WH14FK
IC506	8-759-831-52 s	IC TC7WH125FK
IC507	8-759-831-52 s	IC TC7WH125FK
IC508	8-759-831-52 s	IC TC7WH125FK
IC510	8-759-598-44 s	IC TC7WH08FK
IC511	8-759-598-42 s	IC TC7WH00FK
IC514	6-706-487-01 s	IC TC7SH08FU
IC517	8-759-598-44 s	IC TC7WH08FK
IC518	8-759-598-44 s	IC TC7WH08FK
IC519	6-706-487-01 s	IC TC7SH08FU
IC601	6-706-476-01 s	IC TC7SET04FU
IC602	6-706-476-01 s	IC TC7SET04FU
IC603	6-706-488-01 s	IC TC7SH14FU
IC606	6-704-555-01 o	IC TC7PA04FU (TE85R)
IC607	6-706-484-01 s	IC TC7SH04FU
IC610	8-759-831-52 s	IC TC7WH125FK
IC611	6-706-487-01 s	IC TC7SH08FU
IC616	6-711-237-01 s	IC NJM2878F3-33 (TE2)
IC618	6-706-484-01 s	IC TC7SH04FU
IC619	6-706-488-01 s	IC TC7SH14FU
IC620	6-706-487-01 s	IC TC7SH08FU
IC621	8-759-831-52 s	IC TC7WH125FK
IC622	6-711-443-01 s	IC TC74VHCT125AFK (E,K)
IC623	6-706-487-01 s	IC TC7SH08FU
IC625	6-706-488-01 s	IC TC7SH14FU
IC627	6-706-476-01 s	IC TC7SET04FU
IC628	6-710-861-01 s	IC TC7SET34FU
IC703	6-711-489-01 s	IC TC74VCX244FK (EL)
IC704	6-701-917-01 s	IC TC7PA34FU (TE85R)
IC705	6-701-917-01 s	IC TC7PA34FU (TE85R)
IC706	6-711-489-01 s	IC TC74VCX244FK (EL)
IC707	6-711-489-01 s	IC TC74VCX244FK (EL)
IC709	6-706-476-01 s	IC TC7SET04FU
IC710	8-759-598-43 s	IC TC7WH04FK
IC711	6-704-555-01 o	IC TC7PA04FU (TE85R)
IC712	8-759-092-83 s	IC SN75158PSR
IC713	8-759-598-44 s	IC TC7WH08FK
IC714	6-701-917-01 s	IC TC7PA34FU (TE85R)
IC715	6-704-555-01 o	IC TC7PA04FU (TE85R)
IC716	6-704-555-01 o	IC TC7PA04FU (TE85R)
IC717	8-749-014-35 s	IC HCPL-0630-500
IC801	6-708-346-01 s	IC DAC7512N
IC802	6-711-237-01 s	IC NJM2878F3-33 (TE2)
IC803	6-718-398-01 s	IC ADC128S022C1MTX
IC804	6-712-389-01 s	IC TC74VHC4051AFK (EK)
IC805	6-712-389-01 s	IC TC74VHC4051AFK (EK)
IC806	8-759-669-66 s	IC TLC272CPWR-12
IC807	8-759-327-01 s	IC NJM062V (TE2)
IC808	8-759-327-01 s	IC NJM062V (TE2)
IC809	8-759-327-01 s	IC NJM062V (TE2)
IC810	8-759-675-54 s	IC TC7W53FK (TE85R)
IC811	8-759-327-01 s	IC NJM062V (TE2)
IC812	8-759-327-01 s	IC NJM062V (TE2)
IC813	6-706-484-01 s	IC TC7SH04FU
IC1002	6-706-484-01 s	IC TC7SH04FU
IC1003	8-759-327-01 s	IC NJM062V (TE2)
IC1004	8-759-485-24 s	IC MC74HC4046ADTR2
IC1005	6-711-448-01 s	IC TC74VHCT244AFK (E,K)
IC1103	6-706-487-01 s	IC TC7SH08FU

SY-430 BOARD

Ref. No. or Q'ty	Part No.	SP Description
IC1104	6-701-917-01 s	IC TC7PA34FU (TE85R)
IC1105	6-711-438-01 s	IC TC74VHC595FK (EL,K)
IC1106	6-711-438-01 s	IC TC74VHC595FK (EL,K)
IC1107	6-711-438-01 s	IC TC74VHC595FK (EL,K)
IC1108	6-711-443-01 s	IC TC74VHCT125AFK (E,K)
IC1109	8-759-831-52 s	IC TC7WH125FK
IC1110	8-759-831-52 s	IC TC7WH125FK
IC1113	8-759-831-52 s	IC TC7WH125FK
IC1114	8-759-831-52 s	IC TC7WH125FK
IC1115	6-715-036-01 s	IC TC7SZ04FU, RSONYJ
IC1116	6-715-041-01 s	IC TC7SZ125FU, RSOYJ
IC1201	8-759-561-46 s	IC AD8014ARTZ-REEL7
IC1202	8-759-561-46 s	IC AD8014ARTZ-REEL7
IC1203	8-759-561-46 s	IC AD8014ARTZ-REEL7
IC1204	8-759-561-46 s	IC AD8014ARTZ-REEL7
IC1205	8-759-561-46 s	IC AD8014ARTZ-REEL7
IC1206	8-759-561-46 s	IC AD8014ARTZ-REEL7
IC1207	8-759-561-46 s	IC AD8014ARTZ-REEL7
IC1208	6-710-945-01 s	IC TC74VHC574FK (EL,K)
IC1209	8-759-561-46 s	IC AD8014ARTZ-REEL7
IC1211	8-759-561-46 s	IC AD8014ARTZ-REEL7
IC1212	8-759-561-46 s	IC AD8014ARTZ-REEL7
IC1301	8-759-561-46 s	IC AD8014ARTZ-REEL7
IC1302	8-759-561-46 s	IC AD8014ARTZ-REEL7
IC1303	8-759-561-46 s	IC AD8014ARTZ-REEL7
IC1306	6-712-902-01 s	IC LMH1980MM
IC1307	8-759-287-55 s	IC TC7S66FU (TE85R)
IC1308	8-759-327-14 s	IC TL712CPSR
IC1309	6-704-099-01 s	IC TC7WZ08FK
IC1310	6-704-099-01 s	IC TC7WZ08FK
IC1311	8-759-669-66 s	IC TLC272CPWR-12
IC1313	8-759-675-54 s	IC TC7W53FK (TE85R)
IC1314	8-759-675-54 s	IC TC7W53FK (TE85R)
IC1408	6-706-484-01 s	IC TC7SH04FU
IC1409	6-706-487-01 s	IC TC7SH08FU
IC1411	6-704-567-01 s	IC R3112N451A-TR-FE
IC1412	6-709-322-01 s	IC TC7WH123FK
IC1413	6-706-484-01 s	IC TC7SH04FU
IC1414	6-709-322-01 s	IC TC7WH123FK
IC1415	6-706-489-01 s	IC TC7SH32FU
IC1416	6-704-566-01 s	IC R3112N291A-TR-FE
IC1419	6-706-484-01 s	IC TC7SH04FU
IC1501	6-711-116-01 s	IC NJM2878F3-05 (TE2)
IC1502	6-711-237-01 s	IC NJM2878F3-33 (TE2)
IC1503	6-711-116-01 s	IC NJM2878F3-05 (TE2)
IC1504	6-706-906-01 s	IC NJM2732RB1 (TE2)
IC1505	8-759-598-43 s	IC TC7WH04FK
IC1506	6-718-338-01 s	IC AK5381VT-E2
IC1507	6-710-823-01 o	IC NJM2737RB1 (TE2)
IC1509	6-710-823-01 o	IC NJM2737RB1 (TE2)
IC1511	8-759-598-43 s	IC TC7WH04FK
IC1512	6-700-563-01 s	IC AK4552VT-E2
IC1513	6-706-906-01 s	IC NJM2732RB1 (TE2)
IC1514	6-701-111-01 s	IC AK4382AVT-E2
IC1515	6-706-906-01 s	IC NJM2732RB1 (TE2)
IC1516	6-706-906-01 s	IC NJM2732RB1 (TE2)
IC1518	8-759-422-21 s	IC NJM4580V (TE2)
IC1601	8-759-598-43 s	IC TC7WH04FK
IC1605	6-706-906-01 s	IC NJM2732RB1 (TE2)
IC1606	6-700-563-01 s	IC AK4552VT-E2
IC1607	6-706-906-01 s	IC NJM2732RB1 (TE2)
IC1609	8-759-422-21 s	IC NJM4580V (TE2)
IC1802	6-704-960-01 s	IC NJM2172V (TE2)
IC1804	8-759-675-54 s	IC TC7W53FK (TE85R)
IC1805	8-759-675-54 s	IC TC7W53FK (TE85R)

SY-430 BOARD

Ref. No. or Q'ty	Part No.	SP Description
IC1807	6-706-906-01 s	IC NJM2732RB1 (TE2)
IC1809	6-706-906-01 s	IC NJM2732RB1 (TE2)
IC1812	6-706-489-01 s	IC TC7SH32FU
IC1813	6-706-487-01 s	IC TC7SH08FU
IC1901	6-712-388-01 s	IC TC74VHC4053AFK (EK)
IC1902	6-706-484-01 s	IC TC7SH04FU
IC1906	8-759-675-54 s	IC TC7W53FK (TE85R)
IC1907	6-706-906-01 s	IC NJM2732RB1 (TE2)
IC1909	8-759-327-01 s	IC NJM062V (TE2)
IC1911	8-759-356-17 s	IC NJM4556AM-A-TE2
IC1912	8-759-675-54 s	IC TC7W53FK (TE85R)
IC2001	6-712-388-01 s	IC TC74VHC4053AFK (EK)
IC2002	6-712-388-01 s	IC TC74VHC4053AFK (EK)
IC2003	6-710-823-01 o	IC NJM2737RB1 (TE2)
IC2005	6-711-116-01 s	IC NJM2878F3-05 (TE2)
IC2006	6-711-116-01 s	IC NJM2878F3-05 (TE2)
IC2007	6-712-388-01 s	IC TC74VHC4053AFK (EK)
IC2008	6-712-388-01 s	IC TC74VHC4053AFK (EK)
IC2009	6-710-823-01 o	IC NJM2737RB1 (TE2)
IC2010	8-759-598-43 s	IC TC7WH04FK
L1	1-457-165-21 s	COMMON MODE CHOKE COIL
L101	1-469-559-21 s	INDUCTOR, CHIP 47UH (LB2016)
L102	1-419-630-21 s	COIL, CHOKE 4.7UH
L103	1-457-455-11 s	CHOKE COIL 10UH
L104	1-457-454-11 s	CHOKE COIL 47UH
L105	1-416-606-21 s	COIL, CHOKE (SMD) 47UH
L1201	1-412-987-41 s	INDUCTOR, SMALL TYPE 4.7UH
L1203	1-400-791-21 s	INDUCTOR, CHIP 10UH (2518)
L1204	1-400-791-21 s	INDUCTOR, CHIP 10UH (2518)
L1301	1-412-987-41 s	INDUCTOR, SMALL TYPE 4.7UH
L1302	1-412-987-41 s	INDUCTOR, SMALL TYPE 4.7UH
Q1	8-729-928-05 s	TRANSISTOR 2SC4617TL-QR
Q101	6-550-631-01 s	TRANSISTOR 2SA1797-T100-Q
Q102	6-550-631-01 s	TRANSISTOR 2SA1797-T100-Q
Q103	6-550-632-01 s	TRANSISTOR 2SC4672-T100-Q
Q104	6-550-632-01 s	TRANSISTOR 2SC4672-T100-Q
Q105	6-550-632-01 s	TRANSISTOR 2SC4672-T100-Q
Q106	8-729-928-91 s	TRANSISTOR DTC114EE-TL
Q107	8-729-928-91 s	TRANSISTOR DTC114EE-TL
Q108	6-550-632-01 s	TRANSISTOR 2SC4672-T100-Q
Q109	6-550-631-01 s	TRANSISTOR 2SA1797-T100-Q
Q110	8-729-928-37 s	TRANSISTOR DTA114EE-TL
Q111	8-729-928-91 s	TRANSISTOR DTC114EE-TL
Q113	8-729-928-91 s	TRANSISTOR DTC114EE-TL
Q301	8-729-929-09 s	TRANSISTOR DTC123JE-TL
Q302	8-729-929-09 s	TRANSISTOR DTC123JE-TL
Q303	8-729-929-09 s	TRANSISTOR DTC123JE-TL
Q304	8-729-929-09 s	TRANSISTOR DTC123JE-TL
Q500	8-729-928-91 s	TRANSISTOR DTC114EE-TL
Q501	8-729-928-91 s	TRANSISTOR DTC114EE-TL
Q502	8-729-928-37 s	TRANSISTOR DTA114EE-TL
Q601	8-729-928-25 s	TRANSISTOR 2SA1774TL-QR
Q602	8-729-928-25 s	TRANSISTOR 2SA1774TL-QR
Q603	8-729-928-05 s	TRANSISTOR 2SC4617TL-QR
Q604	8-729-928-91 s	TRANSISTOR DTC114EE-TL
Q605	8-729-928-91 s	TRANSISTOR DTC114EE-TL
Q606	8-729-928-91 s	TRANSISTOR DTC114EE-TL
Q607	8-729-928-91 s	TRANSISTOR DTC114EE-TL
Q608	8-729-928-91 s	TRANSISTOR DTC114EE-TL
Q609	8-729-928-25 s	TRANSISTOR 2SA1774TL-QR
Q610	8-729-928-25 s	TRANSISTOR 2SA1774TL-QR
Q701	8-729-928-91 s	TRANSISTOR DTC114EE-TL
Q702	8-729-928-91 s	TRANSISTOR DTC114EE-TL
Q703	8-729-928-91 s	TRANSISTOR DTC114EE-TL

SY-430 BOARD

Ref. No. or Q'ty	Part No.	SP Description
Q704	8-729-928-91 s	TRANSISTOR DTC114EE-TL
Q705	8-729-928-91 s	TRANSISTOR DTC114EE-TL
Q801	8-729-929-09 s	TRANSISTOR DTC123JE-TL
Q1213	8-729-928-05 s	TRANSISTOR 2SC4617TL-QR
Q1214	8-729-928-05 s	TRANSISTOR 2SC4617TL-QR
Q1215	8-729-928-37 s	TRANSISTOR DTA114EE-TL
Q1216	8-729-928-25 s	TRANSISTOR 2SA1774TL-QR
Q1217	8-729-928-05 s	TRANSISTOR 2SC4617TL-QR
Q1218	8-729-928-05 s	TRANSISTOR 2SC4617TL-QR
Q1219	8-729-928-37 s	TRANSISTOR DTA114EE-TL
Q1220	8-729-928-25 s	TRANSISTOR 2SA1774TL-QR
Q1221	8-729-928-05 s	TRANSISTOR 2SC4617TL-QR
Q1222	8-729-928-05 s	TRANSISTOR 2SC4617TL-QR
Q1223	8-729-928-37 s	TRANSISTOR DTA114EE-TL
Q1224	8-729-928-25 s	TRANSISTOR 2SA1774TL-QR
Q1301	8-729-928-37 s	TRANSISTOR DTA114EE-TL
Q1302	8-729-928-05 s	TRANSISTOR 2SC4617TL-QR
Q1303	8-729-928-05 s	TRANSISTOR 2SC4617TL-QR
Q1304	8-729-928-25 s	TRANSISTOR 2SA1774TL-QR
Q1305	6-551-719-01 o	TRANSISTOR 2SC5876T106QR
Q1501	8-729-013-37 s	TRANSISTOR 2SC4213-AB-TE85L
Q1502	8-729-013-37 s	TRANSISTOR 2SC4213-AB-TE85L
Q1503	6-551-743-01 s	TR SSM6P15FE
Q1504	6-551-743-01 s	TR SSM6P15FE
Q1505	6-551-041-01 s	TR RN4904
Q1506	6-551-041-01 s	TR RN4904
Q1601	8-729-231-96 s	TRANSISTOR 2SK880GR-TE85L
Q1602	8-729-231-96 s	TRANSISTOR 2SK880GR-TE85L
Q1603	8-729-928-37 s	TRANSISTOR DTA114EE-TL
Q1604	6-550-980-01 s	TR RN1904
Q1605	8-729-013-37 s	TRANSISTOR 2SC4213-AB-TE85L
Q1606	8-729-013-37 s	TRANSISTOR 2SC4213-AB-TE85L
Q1607	6-551-743-01 s	TR SSM6P15FE
Q1608	6-551-743-01 s	TR SSM6P15FE
Q1609	6-551-041-01 s	TR RN4904
Q1610	6-551-041-01 s	TR RN4904
Q1814	8-729-928-05 s	TRANSISTOR 2SC4617TL-QR
Q1815	8-729-928-25 s	TRANSISTOR 2SA1774TL-QR
Q1901	8-729-928-91 s	TRANSISTOR DTC114EE-TL
Q1902	8-729-928-25 s	TRANSISTOR 2SA1774TL-QR
Q1903	8-729-928-05 s	TRANSISTOR 2SC4617TL-QR
Q1904	8-729-013-37 s	TRANSISTOR 2SC4213-AB-TE85L
Q1905	8-729-928-91 s	TRANSISTOR DTC114EE-TL
Q1907	8-729-928-05 s	TRANSISTOR 2SC4617TL-QR
Q1909	8-729-928-05 s	TRANSISTOR 2SC4617TL-QR
Q1910	8-729-928-05 s	TRANSISTOR 2SC4617TL-QR
Q1911	8-729-231-96 s	TRANSISTOR 2SK880GR-TE85L
Q1912	8-729-231-96 s	TRANSISTOR 2SK880GR-TE85L
Q1913	8-729-928-25 s	TRANSISTOR 2SA1774TL-QR
Q1914	6-550-632-01 s	TRANSISTOR 2SC4672-T100-Q
Q1915	8-729-928-25 s	TRANSISTOR 2SA1774TL-QR
Q1918	8-729-013-37 s	TRANSISTOR 2SC4213-AB-TE85L
Q1919	8-729-013-37 s	TRANSISTOR 2SC4213-AB-TE85L
Q1920	8-729-928-05 s	TRANSISTOR 2SC4617TL-QR
Q1921	8-729-928-05 s	TRANSISTOR 2SC4617TL-QR
Q1922	6-551-041-01 s	TR RN4904
Q1923	6-551-041-01 s	TR RN4904
Q1924	6-551-041-01 s	TR RN4904
Q2001	8-729-928-91 s	TRANSISTOR DTC114EE-TL
Q2004	8-729-928-25 s	TRANSISTOR 2SA1774TL-QR
Q2008	8-729-928-91 s	TRANSISTOR DTC114EE-TL
Q2009	6-551-041-01 s	TR RN4904
Q2010	6-551-041-01 s	TR RN4904
Q2011	8-729-231-96 s	TRANSISTOR 2SK880GR-TE85L
Q2012	8-729-231-96 s	TRANSISTOR 2SK880GR-TE85L

SY-430 BOARD

Ref. No. or Q'ty	Part No.	SP Description
Q2013	8-729-928-25 s	TRANSISTOR 2SA1774TL-QR
Q2014	8-729-231-96 s	TRANSISTOR 2SK880GR-TE85L
Q2017	8-729-231-96 s	TRANSISTOR 2SK880GR-TE85L
Q2018	6-551-041-01 s	TR RN4904
Q2020	8-729-928-05 s	TRANSISTOR 2SC4617TL-QR
Q2021	8-729-231-96 s	TRANSISTOR 2SK880GR-TE85L
Q2023	8-729-928-05 s	TRANSISTOR 2SC4617TL-QR
Q2024	8-729-928-05 s	TRANSISTOR 2SC4617TL-QR
Q2025	6-550-632-01 s	TRANSISTOR 2SC4672-T100-Q
Q2026	8-729-928-91 s	TRANSISTOR DTC114EE-TL
Q2029	8-729-928-25 s	TRANSISTOR 2SA1774TL-QR
Q2034	6-551-041-01 s	TR RN4904
Q2036	8-729-231-96 s	TRANSISTOR 2SK880GR-TE85L
Q2037	8-729-231-96 s	TRANSISTOR 2SK880GR-TE85L
Q2039	8-729-231-96 s	TRANSISTOR 2SK880GR-TE85L
Q2042	8-729-231-96 s	TRANSISTOR 2SK880GR-TE85L
Q2043	6-551-041-01 s	TR RN4904
Q2045	8-729-928-05 s	TRANSISTOR 2SC4617TL-QR
Q2046	8-729-231-96 s	TRANSISTOR 2SK880GR-TE85L
Q2048	8-729-928-05 s	TRANSISTOR 2SC4617TL-QR
Q2049	8-729-928-05 s	TRANSISTOR 2SC4617TL-QR
Q2050	6-551-041-01 s	TR RN4904
R1	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R2	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R3	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R7	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R8	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R101	1-250-479-11 o	RES, METAL FILM CHIP 220(1005)
R104	1-250-495-11 s	RES, METAL FILM CHIP 1.0K(1005)
R105	1-250-479-11 o	RES, METAL FILM CHIP 220(1005)
R107	1-250-495-11 s	RES, METAL FILM CHIP 1.0K(1005)
R108	1-250-479-11 o	RES, METAL FILM CHIP 220(1005)
R109	1-250-495-11 s	RES, METAL FILM CHIP 1.0K(1005)
R110	1-250-543-11 o	RES, METAL FILM CHIP 100K(1005)
R111	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R112	1-250-499-11 o	RES, METAL FILM CHIP 1.5K(1005)
R113	1-250-511-11 o	RES, METAL FILM CHIP 4.7K(1005)
R114	1-250-491-11 o	RES, METAL FILM CHIP 680(1005)
R115	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R116	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R117	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R118	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R119	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R120	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R121	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R122	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R124	1-250-479-11 o	RES, METAL FILM CHIP 220(1005)
R126	1-250-511-11 o	RES, METAL FILM CHIP 4.7K(1005)
R127	1-250-479-11 o	RES, METAL FILM CHIP 220(1005)
R128	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R129	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R130	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R131	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R133	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R134	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R135	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R136	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R137	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R138	1-250-531-11 s	RES, METAL FILM CHIP 33K(1005)
R139	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R141	1-250-543-11 o	RES, METAL FILM CHIP 100K(1005)
R142	1-250-551-11 s	RES, METAL FILM CHIP 220K(1005)
R143	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R144	1-250-495-11 s	RES, METAL FILM CHIP 1.0K(1005)
R145	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)

SY-430 BOARD

Ref. No. or Q'ty	Part No.	SP Description
R1235	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R1236	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R1237	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R1238	1-250-507-11 o	RES,METAL FILM CHIP 3.3K(1005)
R1239	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R1240	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R1241	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R1242	1-250-507-11 o	RES,METAL FILM CHIP 3.3K(1005)
R1243	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R1244	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R1245	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R1246	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R1247	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R1248	1-250-487-11 s	RES, METAL FILM CHIP 470(1005)
R1250	1-250-499-11 o	RES,METAL FILM CHIP 1.5K(1005)
R1251	1-250-507-11 o	RES,METAL FILM CHIP 3.3K(1005)
R1254	1-250-507-11 o	RES,METAL FILM CHIP 3.3K(1005)
R1255	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R1256	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R1257	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R1258	1-250-475-11 s	RES, METAL FILM CHIP 150(1005)
R1259	1-250-475-11 s	RES, METAL FILM CHIP 150(1005)
R1260	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R1261	1-250-507-11 o	RES,METAL FILM CHIP 3.3K(1005)
R1262	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R1263	1-250-483-11 s	RES, METAL FILM CHIP 330(1005)
R1265	1-250-483-11 s	RES, METAL FILM CHIP 330(1005)
R1266	1-250-507-11 o	RES,METAL FILM CHIP 3.3K(1005)
R1267	1-250-507-11 o	RES,METAL FILM CHIP 3.3K(1005)
R1268	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R1269	1-250-483-11 s	RES, METAL FILM CHIP 330(1005)
R1271	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R1272	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R1274	1-250-491-11 o	RES, METAL FILM CHIP 680(1005)
R1275	1-250-531-11 s	RES, METAL FILM CHIP 33K(1005)
R1276	1-250-547-11 s	RES,METAL FILM CHIP 150K(1005)
R1277	1-250-531-11 s	RES, METAL FILM CHIP 33K(1005)
R1278	1-250-547-11 s	RES,METAL FILM CHIP 150K(1005)
R1280	1-250-467-11 s	RES, METAL FILM CHIP 68 (1005)
R1281	1-250-491-11 o	RES, METAL FILM CHIP 680(1005)
R1284	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R1285	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R1288	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R1289	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R1290	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R1291	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R1294	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R1295	1-250-475-11 s	RES, METAL FILM CHIP 150(1005)
R1296	1-250-475-11 s	RES, METAL FILM CHIP 150(1005)
R1297	1-250-507-11 o	RES,METAL FILM CHIP 3.3K(1005)
R1298	1-250-491-11 o	RES, METAL FILM CHIP 680(1005)
R1299	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R1301	1-250-483-11 s	RES, METAL FILM CHIP 330(1005)
R1302	1-250-483-11 s	RES, METAL FILM CHIP 330(1005)
R1303	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R1304	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R1305	1-250-507-11 o	RES,METAL FILM CHIP 3.3K(1005)
R1306	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R1307	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R1308	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R1309	1-250-499-11 o	RES,METAL FILM CHIP 1.5K(1005)
R1310	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R1311	1-250-483-11 s	RES, METAL FILM CHIP 330(1005)
R1312	1-250-487-11 s	RES, METAL FILM CHIP 470(1005)
R1313	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)

SY-430 BOARD

Ref. No. or Q'ty	Part No.	SP Description
R1314	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R1315	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R1316	1-250-487-11 s	RES, METAL FILM CHIP 470(1005)
R1317	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R1318	1-250-491-11 o	RES, METAL FILM CHIP 680(1005)
R1319	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R1320	1-250-507-11 o	RES,METAL FILM CHIP 3.3K(1005)
R1321	1-250-479-11 o	RES, METAL FILM CHIP 220(1005)
R1323	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R1326	1-250-479-11 o	RES, METAL FILM CHIP 220(1005)
R1327	1-250-499-11 o	RES,METAL FILM CHIP 1.5K(1005)
R1328	1-250-475-11 s	RES, METAL FILM CHIP 150(1005)
R1329	1-250-475-11 s	RES, METAL FILM CHIP 150(1005)
R1330	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R1331	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R1332	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R1333	1-250-507-11 o	RES,METAL FILM CHIP 3.3K(1005)
R1334	1-250-483-11 s	RES, METAL FILM CHIP 330(1005)
R1335	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R1336	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R1337	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R1338	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R1339	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R1346	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R1347	1-250-483-11 s	RES, METAL FILM CHIP 330(1005)
R1348	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R1349	1-250-479-11 o	RES, METAL FILM CHIP 220(1005)
R1350	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R1352	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R1353	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R1354	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R1355	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R1356	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R1358	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R1359	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R1360	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R1361	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R1365	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R1366	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R1367	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R1368	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R1369	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R1370	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R1434	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R1435	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R1436	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R1437	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R1439	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R1440	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R1441	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R1459	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R1460	1-250-563-11 s	RES,METAL FILM CHIP 680K(1005)
R1461	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R1462	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R1463	1-250-567-11 s	RES, METAL FILM CHIP 1M (1005)
R1464	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R1465	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R1466	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R1467	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R1468	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R1469	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R1501	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R1502	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R1503	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R1504	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)

SY-430 BOARD

Ref. No. or Q'ty	Part No.	SP Description
R1816	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R1823	1-250-551-11 s	RES,METAL FILM CHIP 220K(1005)
R1824	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R1827	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R1828	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R1829	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R1830	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R1832	1-250-475-11 s	RES, METAL FILM CHIP 150(1005)
R1833	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R1853	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R1857	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R1858	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R1861	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R1865	1-250-507-11 o	RES,METAL FILM CHIP 3.3K(1005)
R1870	1-250-531-11 s	RES, METAL FILM CHIP 33K(1005)
R1873	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R1880	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R1887	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R1890	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R1891	1-250-507-11 o	RES,METAL FILM CHIP 3.3K(1005)
R1892	1-250-507-11 o	RES,METAL FILM CHIP 3.3K(1005)
R1893	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R1904	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R1907	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R1909	1-250-479-11 o	RES, METAL FILM CHIP 220(1005)
R1916	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R1917	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R1926	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R1927	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R1928	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R1951	1-250-551-11 s	RES,METAL FILM CHIP 220K(1005)
R1952	1-250-551-11 s	RES,METAL FILM CHIP 220K(1005)
R1953	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R1954	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R1955	1-250-499-11 o	RES,METAL FILM CHIP 1.5K(1005)
R1956	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R1957	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R1958	1-250-487-11 s	RES, METAL FILM CHIP 470(1005)
R1959	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R1960	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R1961	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R1962	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R1963	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R1964	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R1965	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R1966	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R1967	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R1968	1-250-507-11 o	RES,METAL FILM CHIP 3.3K(1005)
R1969	1-250-487-11 s	RES, METAL FILM CHIP 470(1005)
R1970	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R1971	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R1972	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R1973	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R1974	1-250-487-11 s	RES, METAL FILM CHIP 470(1005)
R1976	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R1977	1-250-507-11 o	RES,METAL FILM CHIP 3.3K(1005)
R1978	1-250-487-11 s	RES, METAL FILM CHIP 470(1005)
R1979	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R1980	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R1981	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R1982	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R1983	1-250-487-11 s	RES, METAL FILM CHIP 470(1005)
R1984	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R1985	1-250-487-11 s	RES, METAL FILM CHIP 470(1005)
R1986	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)

SY-430 BOARD

Ref. No. or Q'ty	Part No.	SP Description
R1987	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R1989	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R1991	1-250-551-11 s	RES,METAL FILM CHIP 220K(1005)
R1992	1-250-551-11 s	RES,METAL FILM CHIP 220K(1005)
R1997	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R1998	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R1999	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R2000	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R2002	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R2004	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R2005	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R2007	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R2008	1-250-531-11 s	RES, METAL FILM CHIP 33K(1005)
R2009	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R2012	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R2013	1-250-567-11 s	RES, METAL FILM CHIP 1M (1005)
R2014	1-250-567-11 s	RES, METAL FILM CHIP 1M (1005)
R2016	1-250-567-11 s	RES, METAL FILM CHIP 1M (1005)
R2017	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R2018	1-250-531-11 s	RES, METAL FILM CHIP 33K(1005)
R2019	1-250-551-11 s	RES,METAL FILM CHIP 220K(1005)
R2020	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R2021	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R2022	1-250-531-11 s	RES, METAL FILM CHIP 33K(1005)
R2023	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R2024	1-250-551-11 s	RES,METAL FILM CHIP 220K(1005)
R2025	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R2027	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R2028	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R2029	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R2031	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R2032	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R2033	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R2034	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R2035	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R2036	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R2037	1-220-253-91 s	RES, SQUARE TYPE CHIP 47(3225)
R2038	1-218-823-91 s	RES, CHIP 100 (1608)
R2039	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R2040	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R2041	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R2042	1-218-823-91 s	RES, CHIP 100 (1608)
R2043	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R2044	1-218-823-91 s	RES, CHIP 100 (1608)
R2045	1-220-253-91 s	RES, SQUARE TYPE CHIP 47(3225)
R2046	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R2047	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R2048	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R2049	1-250-531-11 s	RES, METAL FILM CHIP 33K(1005)
R2050	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R2051	1-218-823-91 s	RES, CHIP 100 (1608)
R2052	1-250-523-11 o	RES, METAL FILM CHIP 15K(1005)
R2053	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R2054	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R2055	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R2056	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R2057	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R2058	1-250-523-11 o	RES, METAL FILM CHIP 15K(1005)
R2059	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R2060	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R2063	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R2064	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R2065	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R2066	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R2067	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)

SY-430 BOARD

Ref. No. or Q'ty	Part No.	SP Description
R2259	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R2260	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R2261	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R2262	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R2263	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
RB301	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB302	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB303	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB304	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB305	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB306	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB312	1-234-369-21 s	RES, NETWORK 10 (1005X4)
RB313	1-234-378-21 s	RES, NETWORK 10K (1005X4)
RB314	1-234-378-21 s	RES, NETWORK 10K (1005X4)
RB315	1-234-378-21 s	RES, NETWORK 10K (1005X4)
RB316	1-234-378-21 s	RES, NETWORK 10K (1005X4)
RB317	1-234-378-21 s	RES, NETWORK 10K (1005X4)
RB318	1-234-378-21 s	RES, NETWORK 10K (1005X4)
RB319	1-234-375-21 s	RES, NETWORK 1K (1005X4)
RB401	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB402	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB403	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB404	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB412	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB413	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB414	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB415	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB701	1-234-380-21 s	RES, NETWORK 47K (1005X4)
RB702	1-234-380-21 s	RES, NETWORK 47K (1005X4)
RB703	1-234-380-21 s	RES, NETWORK 47K (1005X4)
RB704	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB705	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB706	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB707	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB708	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB709	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB710	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB711	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB712	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB713	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB714	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB715	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB716	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB717	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB718	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB719	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB720	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB721	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB722	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB723	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB724	1-234-378-21 s	RES, NETWORK 10K (1005X4)
RB801	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB802	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB901	1-234-378-21 s	RES, NETWORK 10K (1005X4)
RB902	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB903	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB904	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB905	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB906	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB907	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB908	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB909	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB910	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB911	1-234-372-21 s	RES, NETWORK 100 (1005X4)

SY-430 BOARD

Ref. No. or Q'ty	Part No.	SP Description
RB1101	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB1102	1-234-378-21 s	RES, NETWORK 10K (1005X4)
RB1103	1-234-378-21 s	RES, NETWORK 10K (1005X4)
RB1104	1-234-378-21 s	RES, NETWORK 10K (1005X4)
RB1105	1-234-378-21 s	RES, NETWORK 10K (1005X4)
RB1201	1-234-378-21 s	RES, NETWORK 10K (1005X4)
RB1501	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB1502	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB1503	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB1602	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB1603	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RV1901	1-225-793-21 s	RES, ADJ, CERMET 20K
S3	1-771-796-21 s	SWITCH, SLIDE
S301	1-771-709-41 s	SWITCH, SLIDE
S601	1-786-725-21 s	SWITCH, TACTILE
S901	1-692-270-41 s	SWITCH, SLIDE
THP1	△ 1-802-063-21 s	THERMISTOR, POSITIVE
THP101	△ 1-803-615-21 s	THERMISTOR, POSITIVE
THP102	△ 1-803-615-21 s	THERMISTOR, POSITIVE
THP103	△ 1-803-615-21 s	THERMISTOR, POSITIVE
TP301	1-535-877-22 s	CHIP, CHECKER
TP1301	1-535-877-22 s	CHIP, CHECKER
X1001	1-813-253-12 s	OSCILLATOR, CRYSTAL (VCXO) 5V

TG-285 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1969-516-A s	MOUNTED CIRCUIT BOARD, TG-285
C001	1-112-791-11 s	CAP, ELECT 100MF
C002	1-112-015-91 s	CAP, CHIP CERAMIC 47MF B 3225
C003	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C004	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C005	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C006	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C007	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C008	1-112-916-11 s	CAP, NIOBIUM ELECT 47MF 105
C009	1-112-916-11 s	CAP, NIOBIUM ELECT 47MF 105
C010	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C011	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C012	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C013	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C014	1-135-960-91 s	CAP, CHIP CERAMIC 10MF B(3225)
C015	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C016	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C017	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C018	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C019	1-116-118-11 s	CAP, ELECT 47MF 105
C020	1-112-916-11 s	CAP, NIOBIUM ELECT 47MF 105
C021	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
C022	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C023	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C024	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C025	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C026	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C027	1-100-159-91 s	CAP, CERAMIC 22MF B (SMD) 3216
C028	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C029	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
C030	1-118-044-11 s	CAP, CERAMIC 1MF X5R (2012)

TG-285 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C031	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
C032	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C033	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C034	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C035	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
C036	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
C037	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
C038	1-126-398-21 s	CAP, CHIP ELECT 4.7MF (4X5.7)
C039	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
C040	1-126-398-21 s	CAP, CHIP ELECT 4.7MF (4X5.7)
C041	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
C042	1-165-884-91 s	CAP, CERAMIC 2.2MF (1608)
C043	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C044	1-112-015-91 s	CAP, CHIP CERAMIC 47MF B 3225
C045	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C046	1-114-549-11 s	CAP, NIOBIUM ELECT 47UF
C047	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C048	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C049	1-114-549-11 s	CAP, NIOBIUM ELECT 47UF
C050	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C051	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C052	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C053	1-164-870-81 s	CAP, CHIP CERAMIC 68PF CH 1005
C055	1-164-870-81 s	CAP, CHIP CERAMIC 68PF CH 1005
C057	1-164-870-81 s	CAP, CHIP CERAMIC 68PF CH 1005
C064	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C065	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C066	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C067	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C068	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C069	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C075	1-114-549-11 s	CAP, NIOBIUM ELECT 47UF
C076	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C077	1-114-549-11 s	CAP, NIOBIUM ELECT 47UF
C078	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C079	1-114-549-11 s	CAP, NIOBIUM ELECT 47UF
C080	1-114-549-11 s	CAP, NIOBIUM ELECT 47UF
C081	1-112-015-91 s	CAP, CHIP CERAMIC 47MF B 3225
C083	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C084	1-112-015-91 s	CAP, CHIP CERAMIC 47MF B 3225
C085	1-114-549-11 s	CAP, NIOBIUM ELECT 47UF
C086	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C201	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C202	1-164-850-81 s	CAP, CHIP CERAMIC 10PF CH 1005
C203	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C204	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C205	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C206	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C207	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C208	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C209	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C210	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C211	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C212	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C213	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C214	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C215	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C216	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C217	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C218	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C219	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C220	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C221	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C222	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C223	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005

TG-285 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C224	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C225	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C226	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C227	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C228	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C229	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C230	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C231	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C232	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C233	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C234	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C235	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C236	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C237	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C238	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C239	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C240	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C241	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C242	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C243	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C244	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C245	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C246	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C247	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C248	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C249	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C250	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C251	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C252	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C253	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C254	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C255	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C256	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C257	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C258	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C259	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C260	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C261	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C262	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C263	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C264	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C289	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C290	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C291	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C298	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C299	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C300	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C301	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C302	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C303	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C304	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C305	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C307	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C308	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C309	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
C310	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C311	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
C312	1-112-798-11 s	CAP, ELECT 10MF
CN001	1-774-261-31 s	CONNECTOR, FFC/FPC(ZIF) AN 24P
CN003	1-778-535-31 s	CONNECTOR, FFC/FPC(ZIF) AN 45P
CN011	1-770-622-21 s	PIN, CONNECTOR 5P
CN012	1-770-626-21 s	PIN, CONNECTOR 9P
CN013	1-784-254-21 s	CONNECTOR 10P
D001	8-719-083-60 s	DI UDZSUSTE-174.7B
D002	6-501-123-01 s	DIODE RB160M-60TR

TG-285 BOARD

Ref. No. or Q'ty	Part No.	SP Description
D003	6-503-235-01 s	DI DA3J101F0L
D004	6-503-235-01 s	DI DA3J101F0L
D005	8-719-083-83 s	DI UDZSUSTE-1715B
D201	8-719-989-01 s	DIODE DA221-TL
D202	8-719-989-01 s	DIODE DA221-TL
E001	1-535-877-22 s	CHIP, CHECKER
ET001	1-780-627-11 s	TERMINAL, LUG
ET002	1-780-627-11 s	TERMINAL, LUG
ET003	1-780-627-11 s	TERMINAL, LUG
ET004	1-780-627-11 s	TERMINAL, LUG
FB201	1-469-100-21 s	FERRITE, EMI (SMD) (1608)
FB202	1-469-100-21 s	FERRITE, EMI (SMD) (1608)
FB203	1-469-100-21 s	FERRITE, EMI (SMD) (1608)
FB204	1-469-100-21 s	FERRITE, EMI (SMD) (1608)
FB205	1-469-100-21 s	FERRITE, EMI (SMD) (1608)
FB206	1-469-100-21 s	FERRITE, EMI (SMD) (1608)
FB207	1-469-100-21 s	FERRITE, EMI (SMD) (1608)
FB208	1-469-100-21 s	FERRITE, EMI (SMD) (1608)
FB209	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB210	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB211	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB212	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB213	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB214	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB215	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB216	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB217	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB218	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB219	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB220	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB221	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB222	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB223	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB224	1-469-100-21 s	FERRITE, EMI (SMD) (1608)
FB225	1-469-100-21 s	FERRITE, EMI (SMD) (1608)
FB226	1-469-100-21 s	FERRITE, EMI (SMD) (1608)
IC001	6-706-863-01 s	IC LMH6732MFX/NOPB
IC002	6-706-863-01 s	IC LMH6732MFX/NOPB
IC003	6-706-863-01 s	IC LMH6732MFX/NOPB
IC009	8-759-327-01 s	IC NJM062V (TE2)
IC010	8-759-327-01 s	IC NJM062V (TE2)
IC011	8-759-327-01 s	IC NJM062V (TE2)
IC012	8-759-327-01 s	IC NJM062V (TE2)
IC013	8-759-327-01 s	IC NJM062V (TE2)
IC014	6-704-976-01 s	IC ADR381ARTZ-REEL7
IC015	6-711-852-01 s	IC LTC1844ES5-BYP
IC016	6-704-099-01 s	IC TC7WZ08FK
IC017	8-759-672-76 s	IC AK9813BF-E2
IC018	6-710-210-01 s	IC TPS73101DBVRG4
IC019	6-705-449-01 s	IC HN58W241000I
IC020	6-711-852-01 s	IC LTC1844ES5-BYP
IC202	6-713-829-01 s	IC EPCS4SI8N(11)
IC203	6-715-034-01 s	IC TC7S200FU, RSONYJ
IC204	6-715-036-01 s	IC TC7S204FU, RSONYJ
IC205	6-715-039-01 s	IC TC7S208FU, RSONYJ
IC206	6-704-571-01 s	IC TLC7703IPWR
IC207	6-709-647-01 s	IC TLC2932AIPWR
IC208	8-759-669-66 s	IC TLC272CPWR-12
IC209	6-715-034-01 s	IC TC7S200FU, RSONYJ
IC210	6-715-034-01 s	IC TC7S200FU, RSONYJ
IC218	6-718-319-01 s	IC ADS7830IPWR
IC219	6-707-879-01 s	IC TC74VHC541FT (EKJ)
IC220	6-710-210-01 s	IC TPS73101DBVRG4

TG-285 BOARD

Ref. No. or Q'ty	Part No.	SP Description
IC221	6-706-484-01 s	IC TC7SH04FU
IC222	6-707-838-01 s	IC TC74LCX00FT (EKJ)
IC223	6-707-838-01 s	IC TC74LCX00FT (EKJ)
IC224	6-707-838-01 s	IC TC74LCX00FT (EKJ)
IC225	6-715-041-01 s	IC TC7SZ125FU, RSOYJ
IC226	6-715-041-01 s	IC TC7SZ125FU, RSOYJ
IC227	6-715-041-01 s	IC TC7SZ125FU, RSOYJ
IC228	6-715-041-01 s	IC TC7SZ125FU, RSOYJ
L002	1-400-135-21 s	INDUCTOR 1UH (2012)
L003	1-400-135-21 s	INDUCTOR 1UH (2012)
L004	1-400-135-21 s	INDUCTOR 1UH (2012)
L005	1-400-135-21 s	INDUCTOR 1UH (2012)
L006	1-400-135-21 s	INDUCTOR 1UH (2012)
L201	1-481-593-21 s	INDUCTOR, CHIP 22UH
L202	1-400-135-21 s	INDUCTOR 1UH (2012)
L203	1-400-135-21 s	INDUCTOR 1UH (2012)
L204	1-460-370-11 s	COIL, CHOKE 10UH (4018)
Q001	6-550-631-01 s	TRANSISTOR 2SA1797-T100-Q
Q002	8-729-026-84 s	TRANSISTOR 2SC4215Y-TE85L
Q003	6-550-631-01 s	TRANSISTOR 2SA1797-T100-Q
Q004	8-729-026-84 s	TRANSISTOR 2SC4215Y-TE85L
Q007	6-550-631-01 s	TRANSISTOR 2SA1797-T100-Q
Q008	6-550-632-01 s	TRANSISTOR 2SC4672-T100-Q
Q009	6-550-631-01 s	TRANSISTOR 2SA1797-T100-Q
Q010	6-550-631-01 s	TRANSISTOR 2SA1797-T100-Q
Q011	8-729-928-05 s	TRANSISTOR 2SC4617TL-QR
Q012	8-729-026-53 s	TRANSISTOR 2SA1576A-T106-QR
Q013	8-729-107-04 s	TRANSISTOR 2SB1115-T1YL
Q014	8-729-015-48 s	TRANSISTOR 2SK1062 (TE85L)
Q016	8-729-026-84 s	TRANSISTOR 2SC4215Y-TE85L
Q017	8-729-026-53 s	TRANSISTOR 2SA1576A-T106-QR
Q201	8-729-928-25 s	TRANSISTOR 2SA1774TL-QR
Q202	8-729-928-25 s	TRANSISTOR 2SA1774TL-QR
R001	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R002	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R005	1-250-535-11 s	RES, METAL FILM CHIP 47K (1005)
R006	1-250-535-11 s	RES, METAL FILM CHIP 47K (1005)
R007	1-250-519-11 s	RES, METAL FILM CHIP 10K (1005)
R008	1-250-511-11 o	RES, METAL FILM CHIP 4.7K (1005)
R009	1-250-535-11 s	RES, METAL FILM CHIP 47K (1005)
R010	1-250-535-11 s	RES, METAL FILM CHIP 47K (1005)
R011	1-250-471-11 s	RES, METAL FILM CHIP 100 (1005)
R012	1-250-471-11 s	RES, METAL FILM CHIP 100 (1005)
R013	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R014	1-250-479-11 o	RES, METAL FILM CHIP 220 (1005)
R015	1-250-519-11 s	RES, METAL FILM CHIP 10K (1005)
R016	1-250-519-11 s	RES, METAL FILM CHIP 10K (1005)
R017	1-250-499-11 o	RES, METAL FILM CHIP 1.5K (1005)
R018	1-250-527-11 o	RES, METAL FILM CHIP 22K (1005)
R019	1-250-511-11 o	RES, METAL FILM CHIP 4.7K (1005)
R020	1-250-503-11 o	RES, METAL FILM CHIP 2.2K (1005)
R021	1-250-519-11 s	RES, METAL FILM CHIP 10K (1005)
R022	1-250-519-11 s	RES, METAL FILM CHIP 10K (1005)
R023	1-250-471-11 s	RES, METAL FILM CHIP 100 (1005)
R024	1-250-471-11 s	RES, METAL FILM CHIP 100 (1005)
R025	1-250-479-11 o	RES, METAL FILM CHIP 220 (1005)
R026	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R027	1-250-519-11 s	RES, METAL FILM CHIP 10K (1005)
R028	1-250-519-11 s	RES, METAL FILM CHIP 10K (1005)
R029	1-250-503-11 o	RES, METAL FILM CHIP 2.2K (1005)
R030	1-250-527-11 o	RES, METAL FILM CHIP 22K (1005)
R031	1-250-519-11 s	RES, METAL FILM CHIP 10K (1005)
R032	1-250-519-11 s	RES, METAL FILM CHIP 10K (1005)
R033	1-250-519-11 s	RES, METAL FILM CHIP 10K (1005)

TG-285 BOARD

Ref. No. or Q'ty	Part No.	SP Description
R281	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R282	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R283	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R288	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R289	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R290	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R291	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R292	1-250-479-11 o	RES, METAL FILM CHIP 220(1005)
R293	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R294	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R295	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R296	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R297	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R298	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R299	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R300	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R302	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R303	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R310	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R311	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R312	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R313	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R314	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R315	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R316	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R317	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
RB201	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB202	1-234-370-21 s	RES, NETWORK 22 (1005X4)
X201	1-814-738-11 s	OSCILLATOR, SILICON 148.351648
X202	1-814-737-11 s	OSCILLATOR, SILICON 148.5MHZ

TX-148 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1969-517-A s	MOUNTED CIRCUIT BOARD, TX-148
9/100pcs	3-990-217-01 s	SOFT SHIELD 3500(3133)
C001	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C002	1-114-419-21 s	CAP, CERAMIC 10MF B (2012)
C003	1-164-862-81 s	CAP, CHIP CERAMIC 33PF CH 1005
C004	1-164-862-81 s	CAP, CHIP CERAMIC 33PF CH 1005
C006	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C007	1-164-936-81 s	CAP, CHIP CERAMIC 680PF B 1005
C008	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C009	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C010	1-164-862-81 s	CAP, CHIP CERAMIC 33PF CH 1005
C011	1-164-936-81 s	CAP, CHIP CERAMIC 680PF B 1005
C012	1-164-850-81 s	CAP, CHIP CERAMIC 10PF CH 1005
C013	1-114-419-21 s	CAP, CERAMIC 10MF B (2012)
C022	1-114-419-21 s	CAP, CERAMIC 10MF B (2012)
C025	1-112-298-91 s	CAP, CERAMIC 1MF B (1608)
C026	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C027	1-164-870-81 s	CAP, CHIP CERAMIC 68PF CH 1005
C028	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C031	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C033	1-164-866-81 s	CAP, CHIP CERAMIC 47PF CH 1005
C034	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C035	1-114-419-21 s	CAP, CERAMIC 10MF B (2012)
C036	1-164-940-81 s	CAP,CHIP CERAMIC 3300PF B 1005
C037	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C038	1-100-670-91 s	CAP, CERAMIC 4.7MF C (2012)

TX-148 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C039	1-100-670-91 s	CAP, CERAMIC 4.7MF C (2012)
C040	1-164-845-81 s	CAP, CHIP CERAMIC 5PF CH 1005
C041	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C044	1-114-419-21 s	CAP, CERAMIC 10MF B (2012)
C045	1-114-419-21 s	CAP, CERAMIC 10MF B (2012)
C046	1-164-934-81 s	CAP, CHIP CERAMIC 330PF B 1005
C047	1-119-923-81 s	CAP, CERAMIC 0.047MF B 1005
C048	1-164-939-81 s	CAP, CHIP CERAMIC 2200PF B 1005
C049	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C050	1-100-581-81 s	CAP,CHIP CERAMIC0.0047MF B1005
C051	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C052	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C053	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C054	1-114-419-21 s	CAP, CERAMIC 10MF B (2012)
C055	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C056	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C057	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C059	1-164-935-81 s	CAP, CHIP CERAMIC 470PF B 1005
C061	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C062	1-112-298-91 s	CAP, CERAMIC 1MF B (1608)
C064	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C065	1-164-935-81 s	CAP, CHIP CERAMIC 470PF B 1005
C077	1-114-419-21 s	CAP, CERAMIC 10MF B (2012)
C078	1-114-419-21 s	CAP, CERAMIC 10MF B (2012)
C079	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C080	1-164-935-81 s	CAP, CHIP CERAMIC 470PF B 1005
C081	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C082	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C083	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C084	1-164-940-81 s	CAP,CHIP CERAMIC 3300PF B 1005
C085	1-164-935-81 s	CAP, CHIP CERAMIC 470PF B 1005
C086	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C087	1-114-419-21 s	CAP, CERAMIC 10MF B (2012)
C088	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C089	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C090	1-100-670-91 s	CAP, CERAMIC 4.7MF C (2012)
C093	1-116-709-11 s	CAP, CERAMIC 22MF X5R 3225
C094	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C095	1-114-419-21 s	CAP, CERAMIC 10MF B (2012)
C096	1-114-419-21 s	CAP, CERAMIC 10MF B (2012)
C097	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C098	1-112-298-91 s	CAP, CERAMIC 1MF B (1608)
C099	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C100	1-114-419-21 s	CAP, CERAMIC 10MF B (2012)
C102	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C103	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C104	1-164-862-81 s	CAP, CHIP CERAMIC 33PF CH 1005
C105	1-112-298-91 s	CAP, CERAMIC 1MF B (1608)
C106	1-112-298-91 s	CAP, CERAMIC 1MF B (1608)
C107	1-112-298-91 s	CAP, CERAMIC 1MF B (1608)
C108	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C109	1-114-214-81 s	CAP,CHIP CERAMIC470PF CH1005
C110	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C112	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C113	1-114-419-21 s	CAP, CERAMIC 10MF B (2012)
C114	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C201	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C202	1-114-419-21 s	CAP, CERAMIC 10MF B (2012)
C203	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C204	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C205	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C206	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C207	1-114-419-21 s	CAP, CERAMIC 10MF B (2012)
C208	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C209	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005

TX-148 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C210	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C211	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C212	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C213	1-114-419-21 s	CAP, CERAMIC 10MF B (2012)
C214	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C215	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C216	1-116-705-11 s	CAP, CERAMIC 47MF X5R 3225
C217	1-116-705-11 s	CAP, CERAMIC 47MF X5R 3225
C218	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C219	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C220	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C221	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C222	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C223	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C224	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C225	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C226	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C227	1-114-419-21 s	CAP, CERAMIC 10MF B (2012)
C228	1-114-419-21 s	CAP, CERAMIC 10MF B (2012)
C229	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C230	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C231	1-135-960-91 s	CAP, CHIP CERAMIC 10MF B(3225)
C232	1-135-960-91 s	CAP, CHIP CERAMIC 10MF B(3225)
C233	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C234	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C236	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C240	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C241	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C242	1-114-419-21 s	CAP, CERAMIC 10MF B (2012)
C243	1-114-419-21 s	CAP, CERAMIC 10MF B (2012)
C247	1-114-419-21 s	CAP, CERAMIC 10MF B (2012)
C249	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C250	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C251	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C301	1-114-419-21 s	CAP, CERAMIC 10MF B (2012)
C302	1-114-419-21 s	CAP, CERAMIC 10MF B (2012)
C303	1-112-021-91 s	CAP, CERAMIC 2.2MF C (1608)
C304	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C305	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C306	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C307	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C308	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C309	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C310	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C311	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C312	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C313	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C314	1-100-670-91 s	CAP, CERAMIC 4.7MF C (2012)
C316	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C318	1-112-815-91 s	CAP, CERAMIC 10MF C (1608)
C319	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C320	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C321	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C323	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C324	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C325	1-164-856-81 s	CAP, CHIP CERAMIC 18PF CH 1005
C326	1-164-856-81 s	CAP, CHIP CERAMIC 18PF CH 1005
C327	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C328	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C329	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C330	1-112-815-91 s	CAP, CERAMIC 10MF C (1608)
C331	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C332	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C333	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C334	1-164-848-81 s	CAP, CHIP CERAMIC 8PF CH 1005

TX-148 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C335	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C336	1-164-850-81 s	CAP, CHIP CERAMIC 10PF CH 1005
C337	1-164-858-81 s	CAP, CHIP CERAMIC 22PF CH 1005
C339	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C340	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C342	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C343	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C344	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C345	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C346	1-112-815-91 s	CAP, CERAMIC 10MF C (1608)
C347	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C348	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C349	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C352	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C353	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C354	1-164-840-81 s	CAP, CHIP CERAMIC 1PF CK 1005
C355	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C356	1-114-419-21 s	CAP, CERAMIC 10MF B (2012)
C357	1-112-021-91 s	CAP, CERAMIC 2.2MF C (1608)
C359	1-164-866-81 s	CAP, CHIP CERAMIC 47PF CH 1005
C360	1-164-866-81 s	CAP, CHIP CERAMIC 47PF CH 1005
C361	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C401	1-114-419-21 s	CAP, CERAMIC 10MF B (2012)
C402	1-114-419-21 s	CAP, CERAMIC 10MF B (2012)
C403	1-112-021-91 s	CAP, CERAMIC 2.2MF C (1608)
C404	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C405	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C406	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C407	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C408	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C409	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C410	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C411	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C412	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C413	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C414	1-100-670-91 s	CAP, CERAMIC 4.7MF C (2012)
C416	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C418	1-112-815-91 s	CAP, CERAMIC 10MF C (1608)
C419	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C420	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C421	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C423	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C424	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C425	1-164-856-81 s	CAP, CHIP CERAMIC 18PF CH 1005
C426	1-164-856-81 s	CAP, CHIP CERAMIC 18PF CH 1005
C427	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C428	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C429	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C430	1-112-815-91 s	CAP, CERAMIC 10MF C (1608)
C431	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C432	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C433	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C434	1-164-848-81 s	CAP, CHIP CERAMIC 8PF CH 1005
C435	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C436	1-164-850-81 s	CAP, CHIP CERAMIC 10PF CH 1005
C437	1-164-858-81 s	CAP, CHIP CERAMIC 22PF CH 1005
C438	1-164-842-81 s	CAP,CHIP CERAMIC 2.0PF CK 1005
C439	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C440	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C442	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C443	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C444	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C445	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C446	1-112-815-91 s	CAP, CERAMIC 10MF C (1608)
C447	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005

TX-148 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C448	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C449	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C451	1-164-843-81 s	CAP, CHIP CERAMIC 3PF CJ 1005
C452	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C453	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C454	1-164-842-81 s	CAP,CHIP CERAMIC 2.0PF CK 1005
C455	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C456	1-114-419-21 s	CAP, CERAMIC 10MF B (2012)
C457	1-112-021-91 s	CAP, CERAMIC 2.2MF C (1608)
C459	1-164-866-81 s	CAP, CHIP CERAMIC 47PF CH 1005
C460	1-164-866-81 s	CAP, CHIP CERAMIC 47PF CH 1005
C461	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C501	1-114-419-21 s	CAP, CERAMIC 10MF B (2012)
C502	1-114-419-21 s	CAP, CERAMIC 10MF B (2012)
C503	1-112-021-91 s	CAP, CERAMIC 2.2MF C (1608)
C504	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C505	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C506	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C507	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C508	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C509	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C510	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C511	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C512	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C513	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C514	1-100-670-91 s	CAP, CERAMIC 4.7MF C (2012)
C516	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C518	1-112-815-91 s	CAP, CERAMIC 10MF C (1608)
C519	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C520	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C521	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C523	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C524	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C525	1-164-856-81 s	CAP, CHIP CERAMIC 18PF CH 1005
C526	1-164-856-81 s	CAP, CHIP CERAMIC 18PF CH 1005
C527	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C528	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C529	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C530	1-112-815-91 s	CAP, CERAMIC 10MF C (1608)
C531	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C532	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C533	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C534	1-164-848-81 s	CAP, CHIP CERAMIC 8PF CH 1005
C535	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C536	1-164-850-81 s	CAP, CHIP CERAMIC 10PF CH 1005
C537	1-164-858-81 s	CAP, CHIP CERAMIC 22PF CH 1005
C538	1-164-842-81 s	CAP,CHIP CERAMIC 2.0PF CK 1005
C539	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C540	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C542	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C543	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C544	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C545	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C546	1-112-815-91 s	CAP, CERAMIC 10MF C (1608)
C547	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C548	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C549	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C552	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C553	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C554	1-164-842-81 s	CAP,CHIP CERAMIC 2.0PF CK 1005
C555	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C556	1-114-419-21 s	CAP, CERAMIC 10MF B (2012)
C557	1-112-021-91 s	CAP, CERAMIC 2.2MF C (1608)
C559	1-164-866-81 s	CAP, CHIP CERAMIC 47PF CH 1005
C560	1-164-866-81 s	CAP, CHIP CERAMIC 47PF CH 1005

TX-148 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C561	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C562	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C601	1-164-878-81 s	CAP,CHIP CERAMIC 150PF CH 1005
C602	1-112-021-91 s	CAP, CERAMIC 2.2MF C (1608)
C603	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C604	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C605	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C606	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C607	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C608	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C609	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C610	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C611	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C612	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C613	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C614	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C615	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C616	1-112-815-91 s	CAP, CERAMIC 10MF C (1608)
C617	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C618	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C619	1-100-415-91 s	CAP, CHIP CERAMIC 0.47MF(1005)
C620	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C621	1-112-815-91 s	CAP, CERAMIC 10MF C (1608)
C622	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C623	1-112-815-91 s	CAP, CERAMIC 10MF C (1608)
C624	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C625	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C626	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C627	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C628	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C629	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C630	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C631	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C632	1-112-815-91 s	CAP, CERAMIC 10MF C (1608)
C633	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C634	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C635	1-100-415-91 s	CAP, CHIP CERAMIC 0.47MF(1005)
C636	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C637	1-112-815-91 s	CAP, CERAMIC 10MF C (1608)
C638	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C639	1-112-815-91 s	CAP, CERAMIC 10MF C (1608)
C640	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C641	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C642	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C643	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C644	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C645	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C646	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C647	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C648	1-112-815-91 s	CAP, CERAMIC 10MF C (1608)
C649	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C650	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C651	1-100-415-91 s	CAP, CHIP CERAMIC 0.47MF(1005)
C652	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C653	1-112-815-91 s	CAP, CERAMIC 10MF C (1608)
C654	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C655	1-112-815-91 s	CAP, CERAMIC 10MF C (1608)
C656	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C657	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C658	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C659	1-114-419-21 s	CAP, CERAMIC 10MF B (2012)
C660	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C662	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C663	1-164-882-81 s	CAP,CHIP CERAMIC 220PF CH 1005
C665	1-164-843-81 s	CAP, CHIP CERAMIC 3PF CJ 1005

TX-148 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C666	1-164-850-81 s	CAP, CHIP CERAMIC 10PF CH 1005
C667	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C668	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C669	1-164-854-81 s	CAP, CHIP CERAMIC 15PF CH 1005
C670	1-164-870-81 s	CAP, CHIP CERAMIC 68PF CH 1005
C671	1-164-846-81 s	CAP, CHIP CERAMIC 6PF CH 1005
C672	1-164-850-81 s	CAP, CHIP CERAMIC 10PF CH 1005
C673	1-164-858-81 s	CAP, CHIP CERAMIC 22PF CH 1005
C674	1-164-870-81 s	CAP, CHIP CERAMIC 68PF CH 1005
C675	1-114-419-21 s	CAP, CERAMIC 10MF B (2012)
C676	1-114-419-21 s	CAP, CERAMIC 10MF B (2012)
C677	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C678	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C679	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C680	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C681	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C682	1-164-840-81 s	CAP, CHIP CERAMIC 1PF CK 1005
C683	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C684	1-164-854-81 s	CAP, CHIP CERAMIC 15PF CH 1005
C685	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C686	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C687	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C688	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C689	1-164-870-81 s	CAP, CHIP CERAMIC 68PF CH 1005
C690	1-164-854-81 s	CAP, CHIP CERAMIC 15PF CH 1005
C691	1-164-846-81 s	CAP, CHIP CERAMIC 6PF CH 1005
C692	1-164-850-81 s	CAP, CHIP CERAMIC 10PF CH 1005
C693	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C694	1-164-858-81 s	CAP, CHIP CERAMIC 22PF CH 1005
C695	1-164-870-81 s	CAP, CHIP CERAMIC 68PF CH 1005
C696	1-164-854-81 s	CAP, CHIP CERAMIC 15PF CH 1005
C697	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C698	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C699	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C700	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C701	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C702	1-114-419-21 s	CAP, CERAMIC 10MF B (2012)
C703	1-164-840-81 s	CAP, CHIP CERAMIC 1PF CK 1005
C704	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C705	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C706	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C707	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C708	1-112-021-91 s	CAP, CERAMIC 2.2MF C (1608)
C709	1-114-419-21 s	CAP, CERAMIC 10MF B (2012)
C710	1-114-419-21 s	CAP, CERAMIC 10MF B (2012)
C711	1-164-840-81 s	CAP, CHIP CERAMIC 1PF CK 1005
C712	1-164-840-81 s	CAP, CHIP CERAMIC 1PF CK 1005
C713	1-164-840-81 s	CAP, CHIP CERAMIC 1PF CK 1005
C714	1-164-840-81 s	CAP, CHIP CERAMIC 1PF CK 1005
C715	1-164-840-81 s	CAP, CHIP CERAMIC 1PF CK 1005
C716	1-164-840-81 s	CAP, CHIP CERAMIC 1PF CK 1005
C719	1-164-858-81 s	CAP, CHIP CERAMIC 22PF CH 1005
C720	1-164-845-81 s	CAP, CHIP CERAMIC 5PF CH 1005
C721	1-164-844-81 s	CAP, CHIP CERAMIC 4PF CH 1005
C722	1-164-844-81 s	CAP, CHIP CERAMIC 4PF CH 1005
C723	1-164-845-81 s	CAP, CHIP CERAMIC 5PF CH 1005
C724	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C725	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C726	1-114-419-21 s	CAP, CERAMIC 10MF B (2012)
C729	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C738	1-164-858-81 s	CAP, CHIP CERAMIC 22PF CH 1005
C739	1-164-878-81 s	CAP,CHIP CERAMIC 150PF CH 1005
C743	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C744	1-164-866-81 s	CAP, CHIP CERAMIC 47PF CH 1005
C745	1-164-866-81 s	CAP, CHIP CERAMIC 47PF CH 1005

TX-148 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C746	1-164-866-81 s	CAP, CHIP CERAMIC 47PF CH 1005
C747	1-164-866-81 s	CAP, CHIP CERAMIC 47PF CH 1005
C748	1-164-852-81 s	CAP, CHIP CERAMIC 12PF CH 1005
C749	1-164-852-81 s	CAP, CHIP CERAMIC 12PF CH 1005
C750	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C751	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C801	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C802	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C803	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C804	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C805	1-112-815-91 s	CAP, CERAMIC 10MF C (1608)
C806	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C807	1-116-709-11 s	CAP, CERAMIC 22MF X5R 3225
C809	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C811	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C812	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C813	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C814	1-112-815-91 s	CAP, CERAMIC 10MF C (1608)
C815	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C816	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C817	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
CN001	1-820-786-11 s	CONNECTOR, FFC/FPC (ZIF) 33P
CN002	1-820-786-11 s	CONNECTOR, FFC/FPC (ZIF) 33P
CN003	1-779-806-21 s	CONNECTOR 8P
CN601	1-750-880-11 s	RECEPTACLE, COAXIAL CONNECTOR
D003	8-719-989-01 s	DIODE DA221-TL
D004	6-503-971-01 s	DI 1SV325
D005	8-719-069-28 s	DI 1SS400FJTE61
D006	8-719-069-28 s	DI 1SS400FJTE61
D007	8-719-069-99 s	DIODE 1SS375-TL-E
D008	8-719-069-99 s	DIODE 1SS375-TL-E
D009	8-719-069-99 s	DIODE 1SS375-TL-E
D201	8-719-083-60 s	DI UDZSUSTE-174.7B
D202	8-719-991-01 s	DIODE DAP222-TL
D203	8-719-083-60 s	DI UDZSUSTE-174.7B
D204	8-719-083-60 s	DI UDZSUSTE-174.7B
D205	8-719-074-31 s	DIODE CL-196YG-CD-T
D207	6-501-124-01 s	DIODE RSX101VA-30TR
D301	8-719-083-90 s	DIODE HVU363ATRU
D401	8-719-083-90 s	DIODE HVU363ATRU
D501	8-719-083-90 s	DIODE HVU363ATRU
D601	8-719-069-28 s	DI 1SS400FJTE61
D602	8-719-069-28 s	DI 1SS400FJTE61
D603	8-719-082-45 s	DIODE RB715W-TL
D604	8-719-082-45 s	DIODE RB715W-TL
D605	8-719-989-01 s	DIODE DA221-TL
D801	8-719-989-01 s	DIODE DA221-TL
E002	1-535-877-22 s	CHIP, CHECKER
E301	1-535-877-22 s	CHIP, CHECKER
E302	1-535-877-22 s	CHIP, CHECKER
FB301	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB401	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB501	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB603	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB604	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB605	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB607	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB608	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB609	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB611	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB612	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB613	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FL001	1-200-079-11 s	FILTER, BAND PASS (1.4MHZ)

TX-148 BOARD

Ref. No. or Q'ty	Part No.	SP Description
FL002	1-200-078-11 s	FILTER, BAND PASS (1.0MHZ)
FL301	1-200-082-11 s	FILTER, BAND PASS (106MHZ)
FL401	1-200-081-11 s	FILTER, BAND PASS (96MHZ)
FL501	1-200-080-11 s	FILTER, BAND PASS (86MHZ)
FL601	1-200-090-11 s	FILTER, MULTIPLEX
IC001	6-706-492-01 s	IC TC7SHU04FU
IC003	8-759-698-31 s	IC TC7WH74FK
IC006	6-706-863-01 s	IC LMH6732MFX/NOPB
IC009	8-759-278-58 s	IC NJM4558V-TE2
IC010	8-759-144-73 s	IC UPC393G2-E2
IC011	8-759-278-58 s	IC NJM4558V-TE2
IC014	6-706-487-01 s	IC TC7SH08FU
IC015	8-759-422-21 s	IC NJM4580V (TE2)
IC016	6-706-487-01 s	IC TC7SH08FU
IC017	6-718-491-01 s	IC NJM2549RB2 (TE2)
IC201	8-759-278-58 s	IC NJM4558V-TE2
IC202	6-704-976-01 s	IC ADR381ARTZ-REEL7
IC203	8-759-278-58 s	IC NJM4558V-TE2
IC204	6-712-135-01 o	IC R1173H001D-T1-FE
IC205	8-759-338-95 s	IC NJM2903V (TE2)
IC206	6-712-135-01 o	IC R1173H001D-T1-FE
IC301	6-713-951-01 s	IC LMH6624MFX
IC302	8-753-321-15 s	IC CXA3793R-T4
IC303	8-753-321-14 s	IC CXA3792Q-T4
IC401	6-713-951-01 s	IC LMH6624MFX
IC402	8-753-321-15 s	IC CXA3793R-T4
IC403	8-753-321-14 s	IC CXA3792Q-T4
IC501	6-713-951-01 s	IC LMH6624MFX
IC502	8-753-321-15 s	IC CXA3793R-T4
IC503	8-753-321-14 s	IC CXA3792Q-T4
IC601	6-713-951-01 s	IC LMH6624MFX
IC602	6-706-863-01 s	IC LMH6732MFX/NOPB
IC603	8-753-276-53 s	IC CXD1968AR-T6
IC604	8-753-276-53 s	IC CXD1968AR-T6
IC605	8-753-276-53 s	IC CXD1968AR-T6
IC608	6-713-951-01 s	IC LMH6624MFX
IC609	6-712-077-01 s	IC LMH6550MAX
IC610	6-712-077-01 s	IC LMH6550MAX
IC611	6-712-077-01 s	IC LMH6550MAX
IC801	8-759-337-40 s	IC NJM2904V (TE2)
IC802	8-759-337-40 s	IC NJM2904V (TE2)
IC803	8-759-337-40 s	IC NJM2904V (TE2)
IC804	6-706-487-01 s	IC TC7SH08FU
IC806	8-759-337-40 s	IC NJM2904V (TE2)
IC807	6-712-383-01 s	IC TC74VHC4051AFT (EK)
IC808	8-759-337-40 s	IC NJM2904V (TE2)
L007	1-481-781-21 s	INDUCTOR 47UH
L303	1-481-577-21 s	INDUCTOR, CHIP 1.0UH
L304	1-481-577-21 s	INDUCTOR, CHIP 1.0UH
L305	1-456-900-11 s	INDUCTOR 68NH
L307	1-456-906-11 s	INDUCTOR 820NH
L403	1-481-577-21 s	INDUCTOR, CHIP 1.0UH
L404	1-481-577-21 s	INDUCTOR, CHIP 1.0UH
L405	1-456-900-11 s	INDUCTOR 68NH
L407	1-456-906-11 s	INDUCTOR 820NH
L503	1-481-577-21 s	INDUCTOR, CHIP 1.0UH
L504	1-481-577-21 s	INDUCTOR, CHIP 1.0UH
L505	1-456-901-11 s	INDUCTOR 82NH
L507	1-456-906-11 s	INDUCTOR 820NH
L602	1-481-074-21 s	INDUCTOR 2.2UH
L603	1-481-074-21 s	INDUCTOR 2.2UH
L606	1-481-609-11 s	INDUCTOR 240NH
L607	1-481-609-11 s	INDUCTOR 240NH
L608	1-481-609-11 s	INDUCTOR 240NH

TX-148 BOARD

Ref. No. or Q'ty	Part No.	SP Description
L609	1-481-609-11 s	INDUCTOR 240NH
L610	1-481-074-21 s	INDUCTOR 2.2UH
L611	1-481-074-21 s	INDUCTOR 2.2UH
L612	1-481-074-21 s	INDUCTOR 2.2UH
L614	1-469-549-21 s	INDUCTOR, CHIP 1.0UH (LB2016)
L701	1-414-524-41 s	INDUCTOR, SMALL TYPE 33.0UH
L702	1-414-524-41 s	INDUCTOR, SMALL TYPE 33.0UH
LV001	1-460-651-11 s	COIL, VARIABLE (150UH)
LV004	1-460-651-11 s	COIL, VARIABLE (150UH)
Q001	8-729-928-05 s	TRANSISTOR 2SC4617TL-QR
Q002	8-729-928-25 s	TRANSISTOR 2SA1774TL-QR
Q003	8-729-928-05 s	TRANSISTOR 2SC4617TL-QR
Q004	8-729-928-05 s	TRANSISTOR 2SC4617TL-QR
Q005	8-729-928-05 s	TRANSISTOR 2SC4617TL-QR
Q007	8-729-928-05 s	TRANSISTOR 2SC4617TL-QR
Q008	8-729-928-05 s	TRANSISTOR 2SC4617TL-QR
Q201	6-550-631-01 s	TRANSISTOR 2SA1797-T100-Q
Q202	6-550-631-01 s	TRANSISTOR 2SA1797-T100-Q
Q203	6-550-631-01 s	TRANSISTOR 2SA1797-T100-Q
Q204	6-550-632-01 s	TRANSISTOR 2SC4672-T100-Q
Q211	8-729-928-05 s	TRANSISTOR 2SC4617TL-QR
Q212	8-729-928-05 s	TRANSISTOR 2SC4617TL-QR
Q213	8-729-928-05 s	TRANSISTOR 2SC4617TL-QR
Q601	8-729-923-27 s	TRANSISTOR 2SC4082-T106P
Q602	8-729-923-27 s	TRANSISTOR 2SC4082-T106P
Q603	8-729-923-27 s	TRANSISTOR 2SC4082-T106P
Q604	8-729-111-97 s	TRANSISTOR 2SC3356-T1K
Q605	8-729-111-97 s	TRANSISTOR 2SC3356-T1K
Q606	8-729-923-27 s	TRANSISTOR 2SC4082-T106P
Q607	8-729-923-27 s	TRANSISTOR 2SC4082-T106P
Q608	8-729-923-27 s	TRANSISTOR 2SC4082-T106P
Q701	8-729-111-97 s	TRANSISTOR 2SC3356-T1K
Q702	8-729-111-97 s	TRANSISTOR 2SC3356-T1K
Q703	8-729-923-27 s	TRANSISTOR 2SC4082-T106P
Q704	8-729-923-27 s	TRANSISTOR 2SC4082-T106P
Q705	8-729-923-27 s	TRANSISTOR 2SC4082-T106P
Q706	8-729-923-27 s	TRANSISTOR 2SC4082-T106P
R001	1-250-531-11 s	RES, METAL FILM CHIP 33K(1005)
R002	1-250-515-11 s	RES, METAL FILM CHIP 6.8K(1005)
R003	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R004	1-243-975-81 s	RES, CHIP 4.7M (1005)
R005	1-243-975-81 s	RES, CHIP 4.7M (1005)
R006	1-250-555-11 s	RES, METAL FILM CHIP 330K(1005)
R007	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R8	1-250-543-11 o	RES, METAL FILM CHIP 100K(1005)
R009	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R010	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R011	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R012	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R013	1-250-487-11 s	RES, METAL FILM CHIP 470(1005)
R014	1-250-503-11 o	RES, METAL FILM CHIP 2.2K(1005)
R031	1-250-551-11 s	RES, METAL FILM CHIP 220K(1005)
R032	1-250-543-11 o	RES, METAL FILM CHIP 100K(1005)
R033	1-250-499-11 o	RES, METAL FILM CHIP 1.5K(1005)
R034	1-250-543-11 o	RES, METAL FILM CHIP 100K(1005)
R035	1-250-523-11 o	RES, METAL FILM CHIP 15K(1005)
R036	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R037	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R038	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R039	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R040	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R041	1-250-523-11 o	RES, METAL FILM CHIP 15K(1005)
R043	1-250-503-11 o	RES, METAL FILM CHIP 2.2K(1005)
R044	1-250-543-11 o	RES, METAL FILM CHIP 100K(1005)

TX-148 BOARD

Ref. No. or Q'ty	Part No.	SP Description
R045	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R046	1-250-515-11 s	RES,METAL FILM CHIP 6.8K(1005)
R047	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R048	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R049	1-250-499-11 o	RES,METAL FILM CHIP 1.5K(1005)
R050	1-250-499-11 o	RES,METAL FILM CHIP 1.5K(1005)
R051	1-250-531-11 s	RES, METAL FILM CHIP 33K(1005)
R052	1-250-531-11 s	RES, METAL FILM CHIP 33K(1005)
R053	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R054	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R055	1-250-551-11 s	RES,METAL FILM CHIP 220K(1005)
R056	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R057	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R058	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R059	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R069	1-250-523-11 o	RES, METAL FILM CHIP 15K(1005)
R070	1-250-507-11 o	RES,METAL FILM CHIP 3.3K(1005)
R071	1-250-499-11 o	RES,METAL FILM CHIP 1.5K(1005)
R072	1-250-483-11 s	RES, METAL FILM CHIP 330(1005)
R073	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R074	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R075	1-250-487-11 s	RES, METAL FILM CHIP 470(1005)
R076	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R077	1-250-531-11 s	RES, METAL FILM CHIP 33K(1005)
R078	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R079	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R080	1-250-531-11 s	RES, METAL FILM CHIP 33K(1005)
R081	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R082	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R083	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R084	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R085	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R086	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R087	1-250-531-11 s	RES, METAL FILM CHIP 33K(1005)
R088	1-250-547-11 s	RES,METAL FILM CHIP 150K(1005)
R089	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R090	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R091	1-250-499-11 o	RES,METAL FILM CHIP 1.5K(1005)
R092	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R109	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R110	1-250-499-11 o	RES,METAL FILM CHIP 1.5K(1005)
R111	1-250-531-11 s	RES, METAL FILM CHIP 33K(1005)
R112	1-250-531-11 s	RES, METAL FILM CHIP 33K(1005)
R113	1-250-499-11 o	RES,METAL FILM CHIP 1.5K(1005)
R114	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R115	1-250-487-11 s	RES, METAL FILM CHIP 470(1005)
R116	1-250-479-11 o	RES, METAL FILM CHIP 220(1005)
R117	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R119	1-250-507-11 o	RES,METAL FILM CHIP 3.3K(1005)
R120	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R121	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R122	1-250-551-11 s	RES,METAL FILM CHIP 220K(1005)
R124	1-250-531-11 s	RES, METAL FILM CHIP 33K(1005)
R125	1-220-804-81 s	RES, CHIP 2.2M (1005)
R126	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R127	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R128	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R129	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R130	1-250-531-11 s	RES, METAL FILM CHIP 33K(1005)
R131	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R132	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R133	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R137	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R138	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R139	1-250-491-11 o	RES, METAL FILM CHIP 680(1005)

TX-148 BOARD

Ref. No. or Q'ty	Part No.	SP Description
R140	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R143	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R144	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R201	1-250-479-11 o	RES, METAL FILM CHIP 220(1005)
R202	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R203	1-250-483-11 s	RES, METAL FILM CHIP 330(1005)
R204	1-250-531-11 s	RES, METAL FILM CHIP 33K(1005)
R205	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R206	1-250-551-11 s	RES,METAL FILM CHIP 220K(1005)
R208	1-250-479-11 o	RES, METAL FILM CHIP 220(1005)
R209	1-250-531-11 s	RES, METAL FILM CHIP 33K(1005)
R210	1-250-531-11 s	RES, METAL FILM CHIP 33K(1005)
R211	1-250-551-11 s	RES,METAL FILM CHIP 220K(1005)
R212	1-250-515-11 s	RES,METAL FILM CHIP 6.8K(1005)
R213	1-250-479-11 o	RES, METAL FILM CHIP 220(1005)
R214	1-250-479-11 o	RES, METAL FILM CHIP 220(1005)
R215	1-250-531-11 s	RES, METAL FILM CHIP 33K(1005)
R216	1-250-531-11 s	RES, METAL FILM CHIP 33K(1005)
R217	1-250-551-11 s	RES,METAL FILM CHIP 220K(1005)
R218	1-250-539-11 o	RES, METAL FILM CHIP 68K(1005)
R219	1-250-539-11 o	RES, METAL FILM CHIP 68K(1005)
R221	1-250-531-11 s	RES, METAL FILM CHIP 33K(1005)
R222	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R223	1-250-523-11 o	RES, METAL FILM CHIP 15K(1005)
R224	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R225	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R226	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R227	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R228	1-250-515-11 s	RES,METAL FILM CHIP 6.8K(1005)
R229	1-250-523-11 o	RES, METAL FILM CHIP 15K(1005)
R230	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R231	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R232	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R233	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R234	1-250-523-11 o	RES, METAL FILM CHIP 15K(1005)
R235	1-250-487-11 s	RES, METAL FILM CHIP 470(1005)
R236	1-250-507-11 o	RES,METAL FILM CHIP 3.3K(1005)
R237	1-250-491-11 o	RES, METAL FILM CHIP 680(1005)
R238	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R239	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R242	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R246	1-242-967-81 s	RES, CHIP 1.0 (1005)
R247	1-242-967-81 s	RES, CHIP 1.0 (1005)
R248	1-242-967-81 s	RES, CHIP 1.0 (1005)
R249	1-242-967-81 s	RES, CHIP 1.0 (1005)
R255	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R256	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R257	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R265	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R266	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R267	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R268	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R269	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R270	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R271	1-250-479-11 o	RES, METAL FILM CHIP 220(1005)
R301	1-250-487-11 s	RES, METAL FILM CHIP 470(1005)
R302	1-250-487-11 s	RES, METAL FILM CHIP 470(1005)
R303	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R304	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R306	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R307	1-250-515-11 s	RES,METAL FILM CHIP 6.8K(1005)
R308	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R310	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R311	1-250-539-11 o	RES, METAL FILM CHIP 68K(1005)
R312	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)


TX-148 BOARD

Ref. No. or Q'ty	Part No.	SP Description
R647	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R648	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R651	1-250-491-11 o	RES, METAL FILM CHIP 680(1005)
R652	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R653	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R654	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R655	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R656	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R657	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R658	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R661	1-250-523-11 o	RES, METAL FILM CHIP 15K(1005)
R663	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R665	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R666	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R667	1-250-491-11 o	RES, METAL FILM CHIP 680(1005)
R668	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R671	1-250-487-11 s	RES, METAL FILM CHIP 470(1005)
R672	1-250-487-11 s	RES, METAL FILM CHIP 470(1005)
R673	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R674	1-250-483-11 s	RES, METAL FILM CHIP 330(1005)
R675	1-250-479-11 o	RES, METAL FILM CHIP 220(1005)
R676	1-250-483-11 s	RES, METAL FILM CHIP 330(1005)
R677	1-250-479-11 o	RES, METAL FILM CHIP 220(1005)
R678	1-250-487-11 s	RES, METAL FILM CHIP 470(1005)
R679	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R680	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R681	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R682	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R683	1-250-483-11 s	RES, METAL FILM CHIP 330(1005)
R684	1-250-479-11 o	RES, METAL FILM CHIP 220(1005)
R685	1-250-483-11 s	RES, METAL FILM CHIP 330(1005)
R686	1-250-479-11 o	RES, METAL FILM CHIP 220(1005)
R687	1-250-487-11 s	RES, METAL FILM CHIP 470(1005)
R689	1-250-479-11 o	RES, METAL FILM CHIP 220(1005)
R690	1-250-479-11 o	RES, METAL FILM CHIP 220(1005)
R691	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R692	1-250-479-11 o	RES, METAL FILM CHIP 220(1005)
R693	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R694	1-250-515-11 s	RES,METAL FILM CHIP 6.8K(1005)
R695	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R698	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R699	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R701	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R703	1-250-479-11 o	RES, METAL FILM CHIP 220(1005)
R704	1-250-479-11 o	RES, METAL FILM CHIP 220(1005)
R705	1-250-475-11 s	RES, METAL FILM CHIP 150(1005)
R706	1-250-475-11 s	RES, METAL FILM CHIP 150(1005)
R707	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R708	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R709	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R710	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R711	1-250-483-11 s	RES, METAL FILM CHIP 330(1005)
R712	1-250-483-11 s	RES, METAL FILM CHIP 330(1005)
R713	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R714	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R715	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R716	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R717	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R718	1-250-479-11 o	RES, METAL FILM CHIP 220(1005)
R719	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R720	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R721	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R722	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R723	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R726	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)





TX-148 BOARD

Ref. No. or Q'ty	Part No.	SP Description
R727	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R728	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R729	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R730	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R731	1-250-479-11 o	RES, METAL FILM CHIP 220(1005)
R732	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R733	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R734	1-250-491-11 o	RES, METAL FILM CHIP 680(1005)
R735	1-250-491-11 o	RES, METAL FILM CHIP 680(1005)
R736	1-250-491-11 o	RES, METAL FILM CHIP 680(1005)
R737	1-250-491-11 o	RES, METAL FILM CHIP 680(1005)
R738	1-250-491-11 o	RES, METAL FILM CHIP 680(1005)
R739	1-250-499-11 o	RES,METAL FILM CHIP 1.5K(1005)
R740	1-250-499-11 o	RES,METAL FILM CHIP 1.5K(1005)
R801	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R802	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R803	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R804	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R805	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R806	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R807	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R808	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R809	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R810	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R811	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R812	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R813	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R815	1-250-559-11 o	RES,METAL FILM CHIP 470K(1005)
R816	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R817	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R819	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R823	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R828	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R829	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R830	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R831	1-250-523-11 o	RES, METAL FILM CHIP 15K(1005)
R832	1-250-523-11 o	RES, METAL FILM CHIP 15K(1005)
R833	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R834	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R835	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R836	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
RB601	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB602	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB603	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RV601	1-225-788-21 s	RES, ADJ, CERMET 1K
T601	1-445-611-11 s	TRANSFORMER, BALUN
TP001	1-535-877-22 s	CHIP, CHECKER
TP002	1-535-877-22 s	CHIP, CHECKER
TP004	1-535-877-22 s	CHIP, CHECKER
TP201	1-780-925-11 s	TERMINAL, LUG
TP202	1-780-925-11 s	TERMINAL, LUG
TP301	1-535-877-22 s	CHIP, CHECKER
X001	1-781-696-21 s	VIBRATOR, CRYSTAL (32.768 KHz)
X601	1-814-052-21 s	VIBRATOR, CRYSTAL 4MHZ (8045) (4 MHz)

AT-189E
AT-189E (1/4)

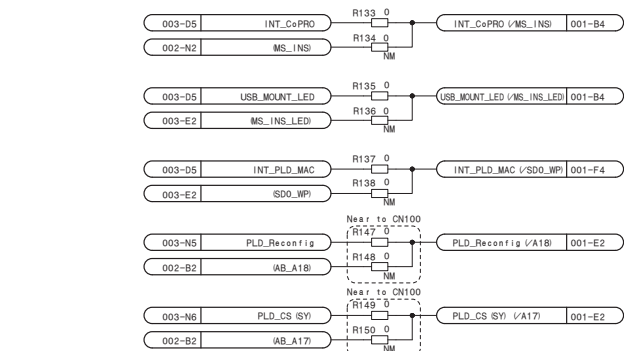

AT-189E (1/4)
BOARD NO. 1-885-937-21
AT-189_1

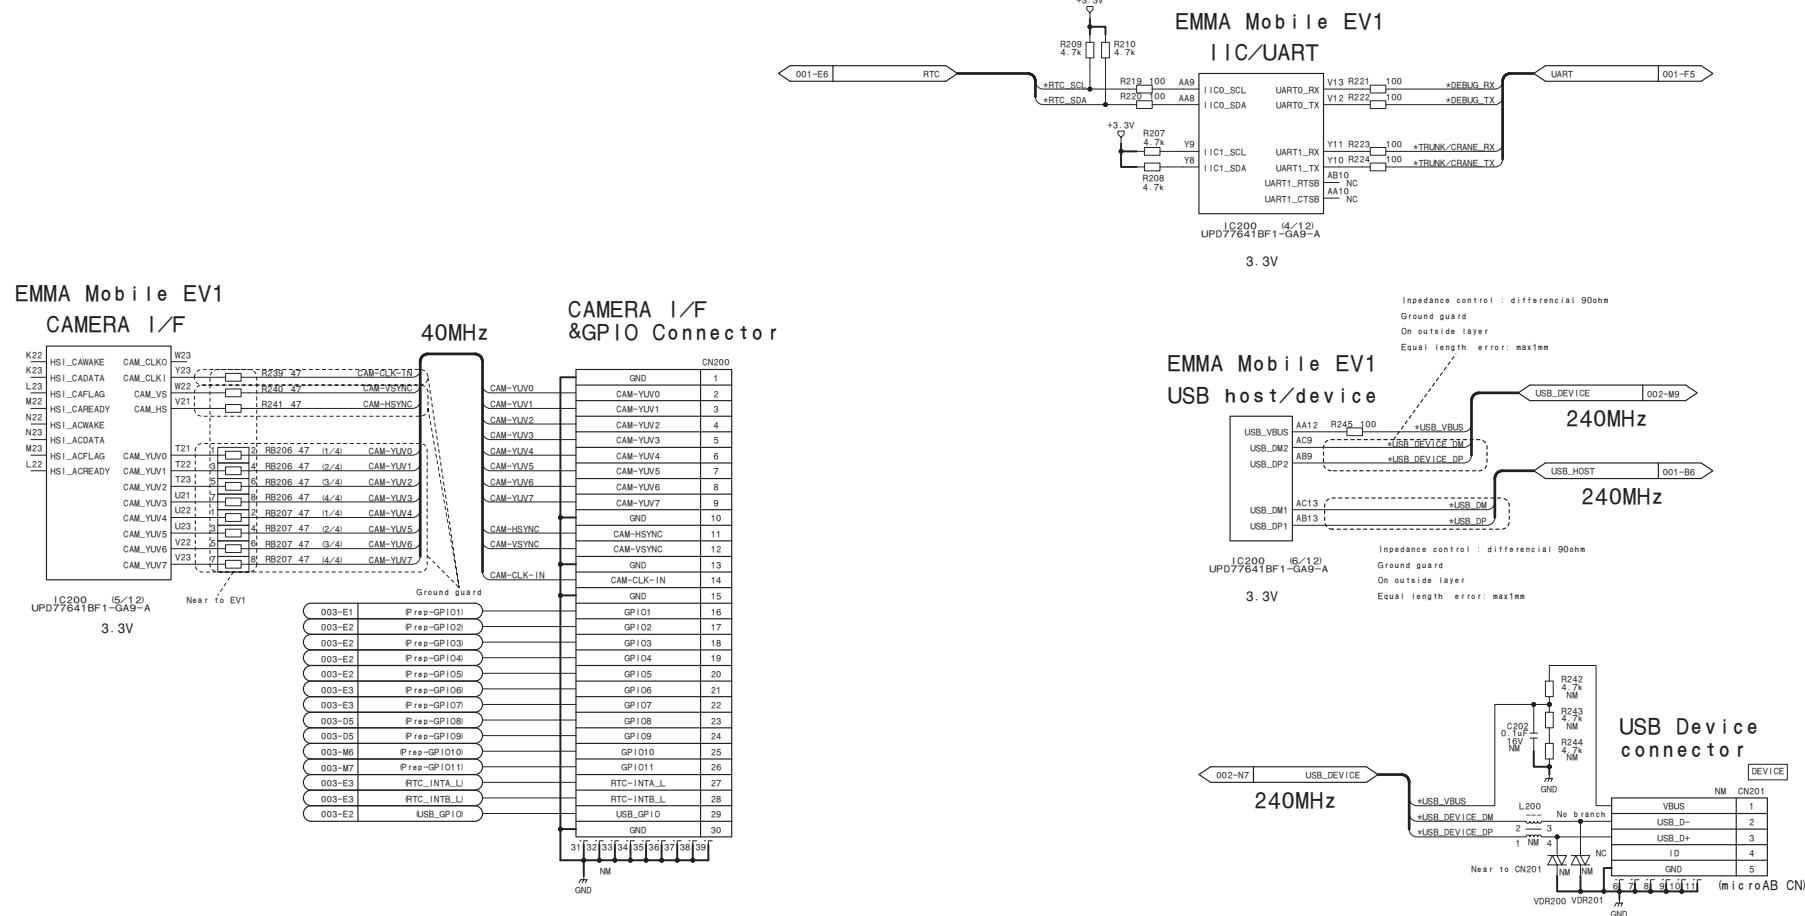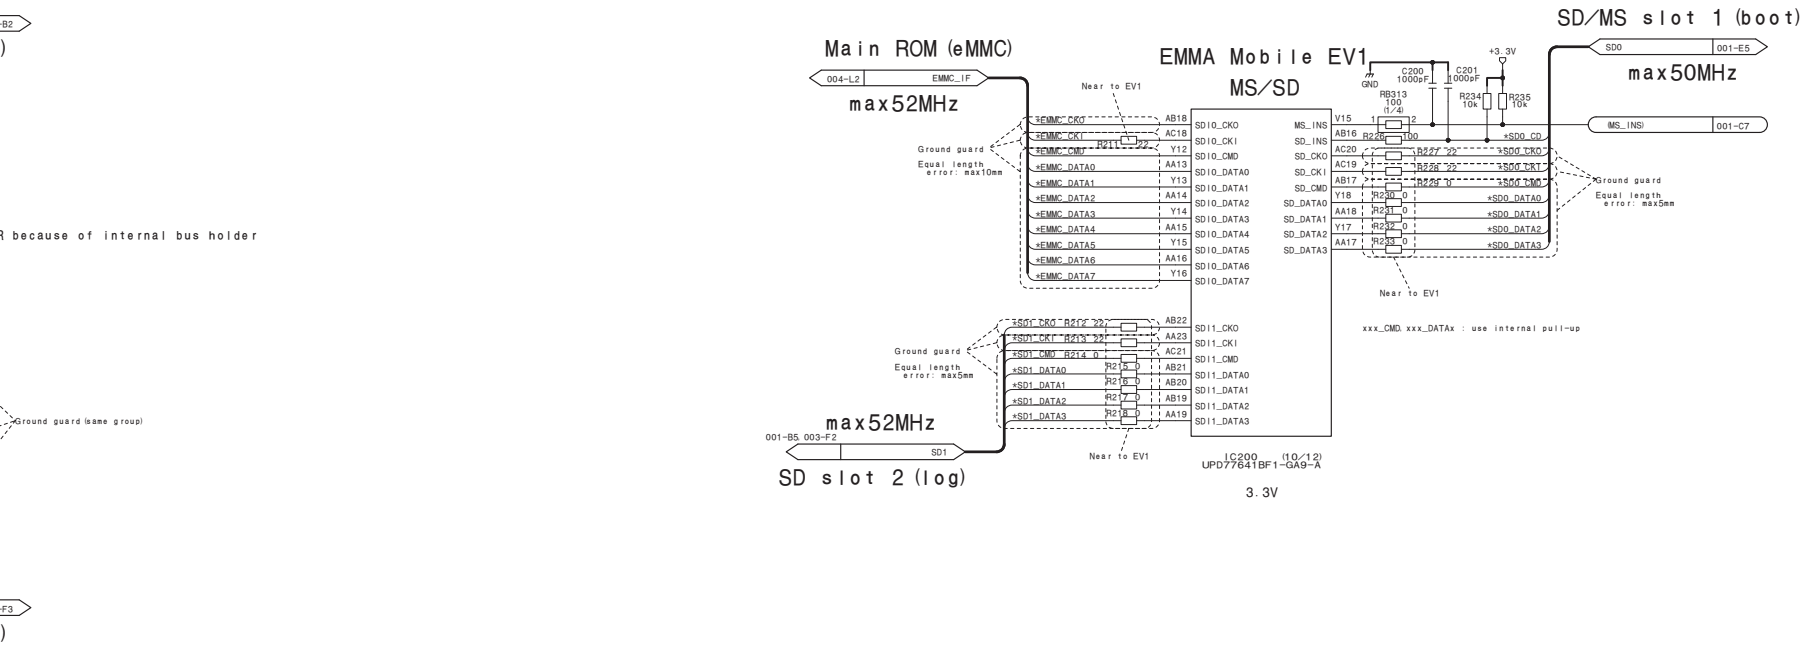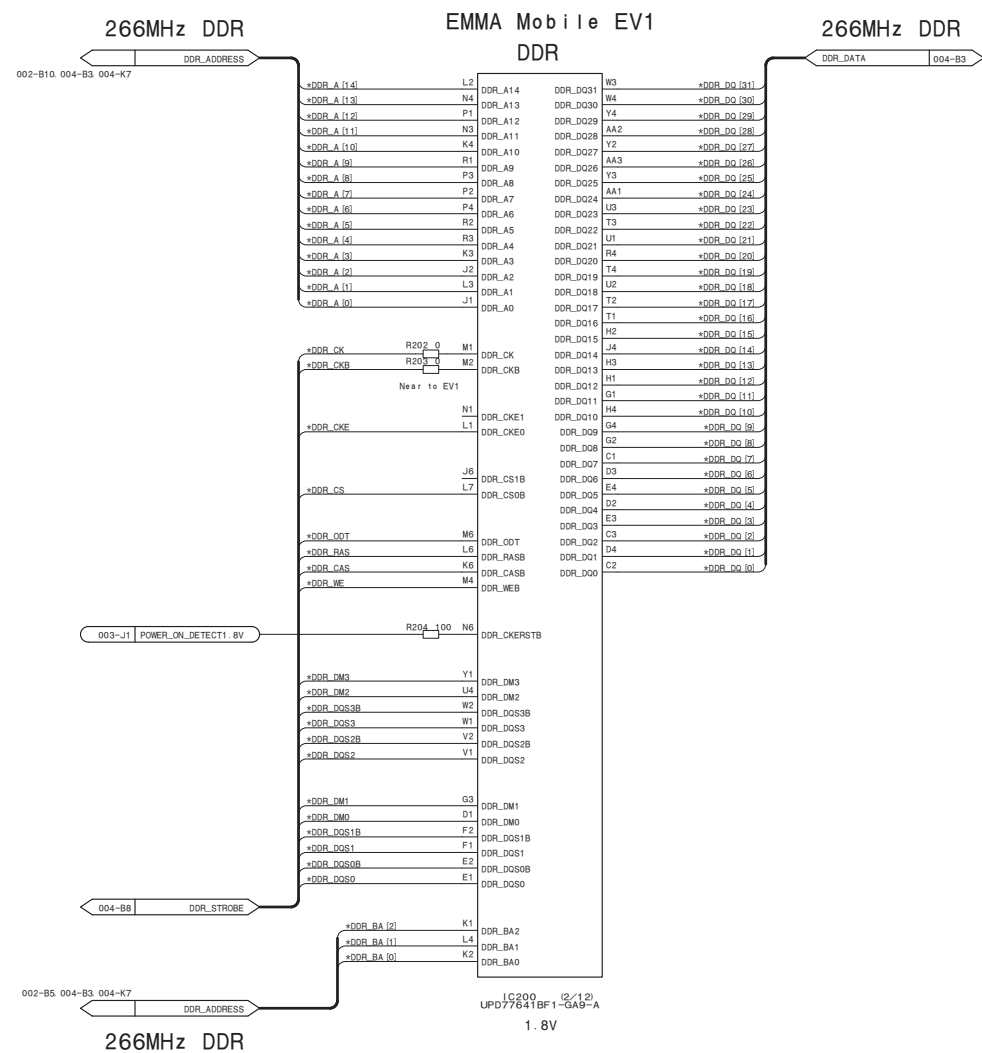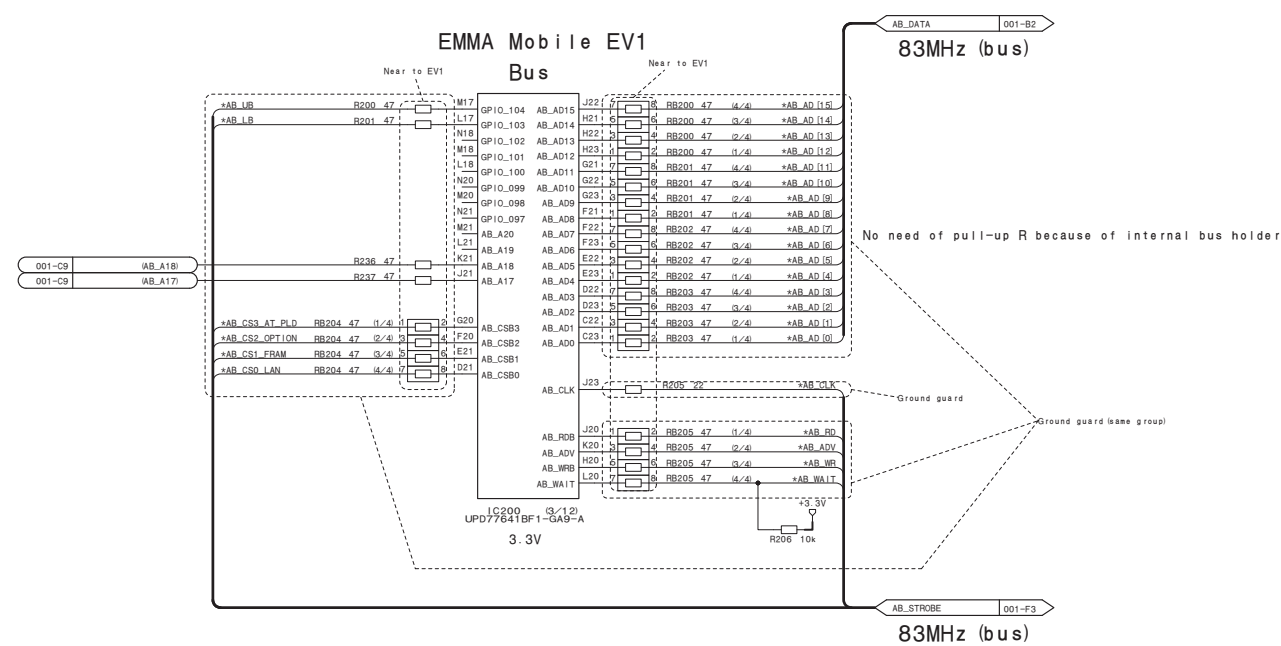
AT-189E (2/4)

EMMA Mobile EV1 Bus/DDR2/CAMERA/eMMC/SD/UART/IIC/USB


AT-189E (2/4)
BOARD NO. 1-885-937-21
AT-189_2

AT-189E (3/4)

EMMA Mobile EV1

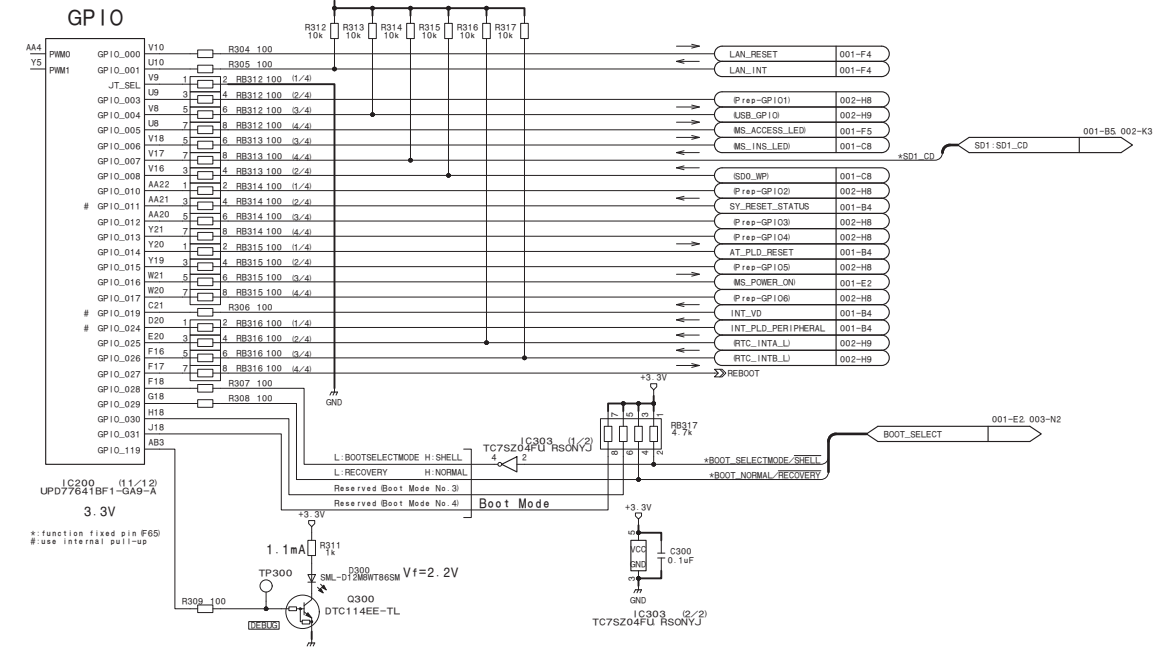


EMMA Mobile EV1

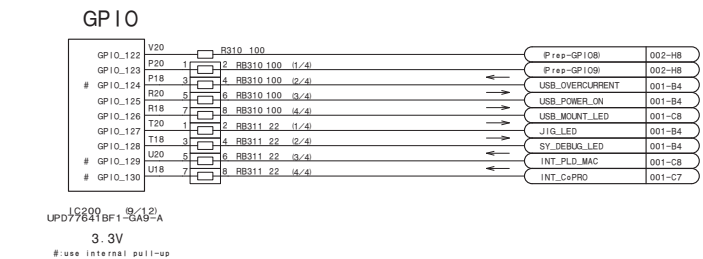

EMMA Mobile EV1


LCD

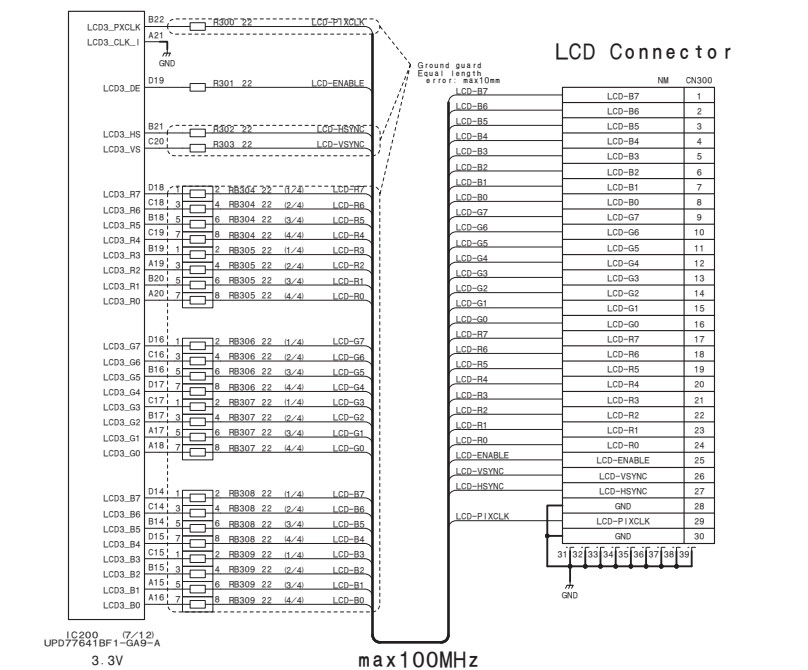

6


7

5

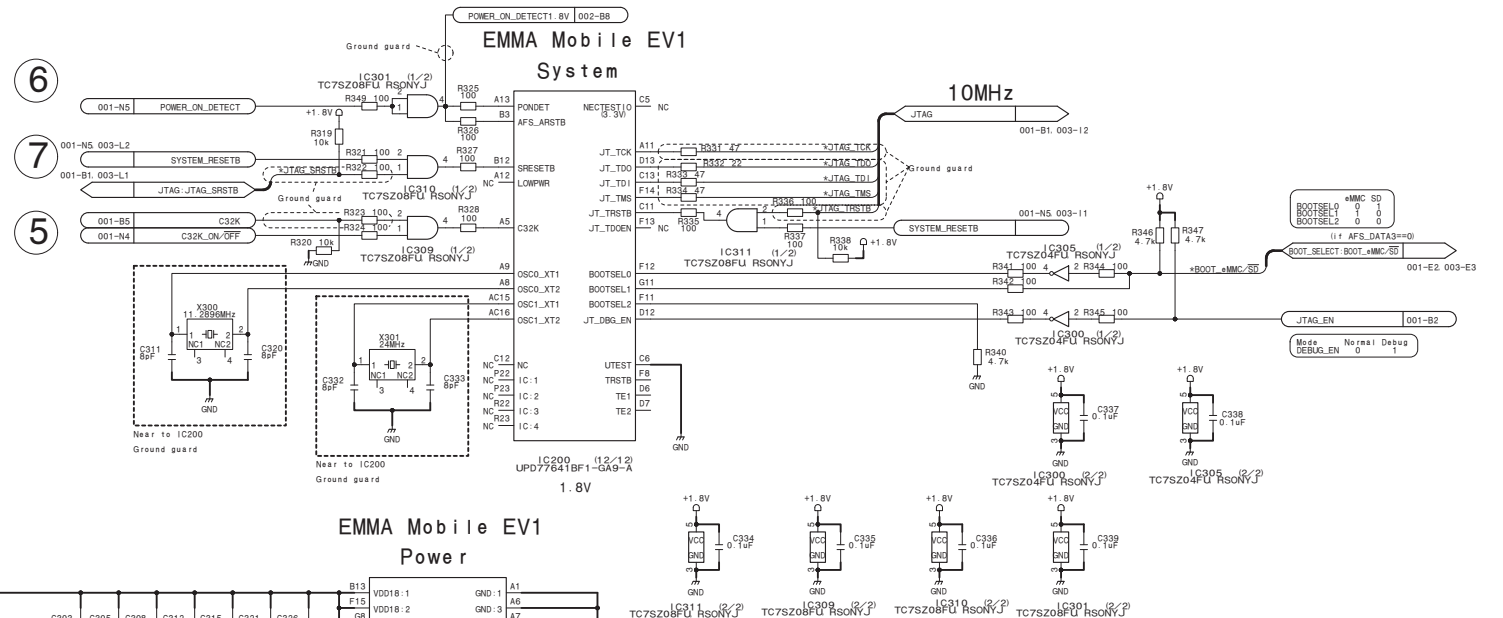


EMMA Mobile EV1

Power

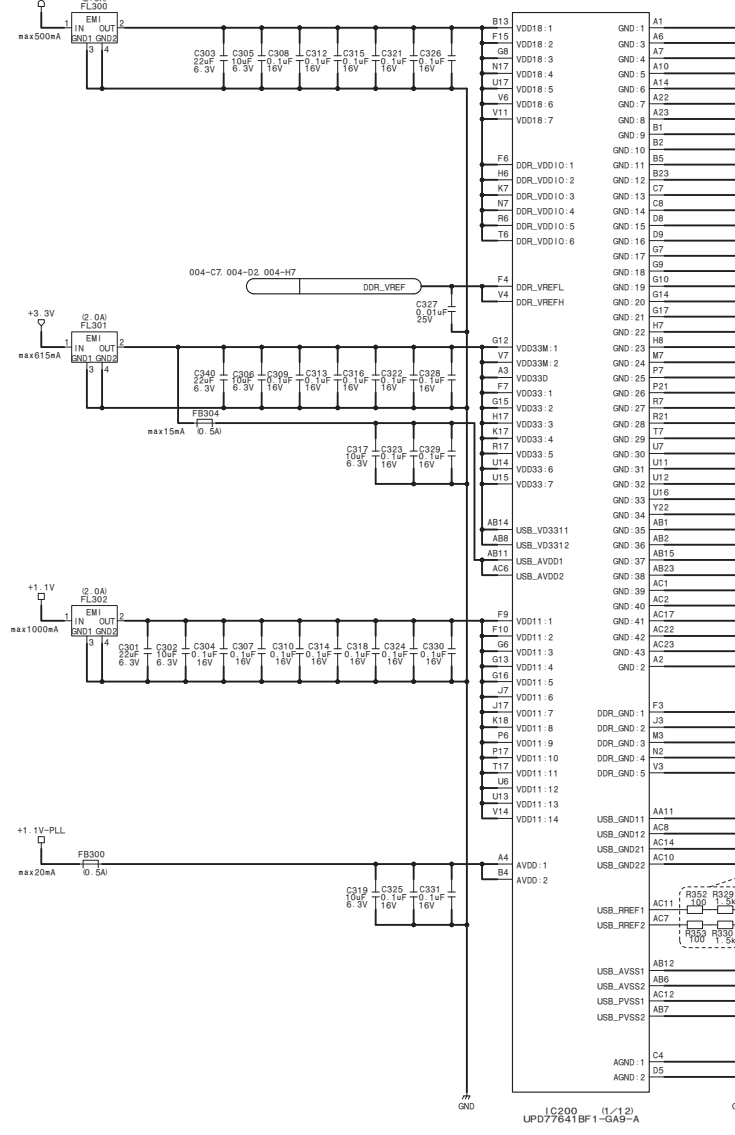

EMMA Mobile EV1


SP I

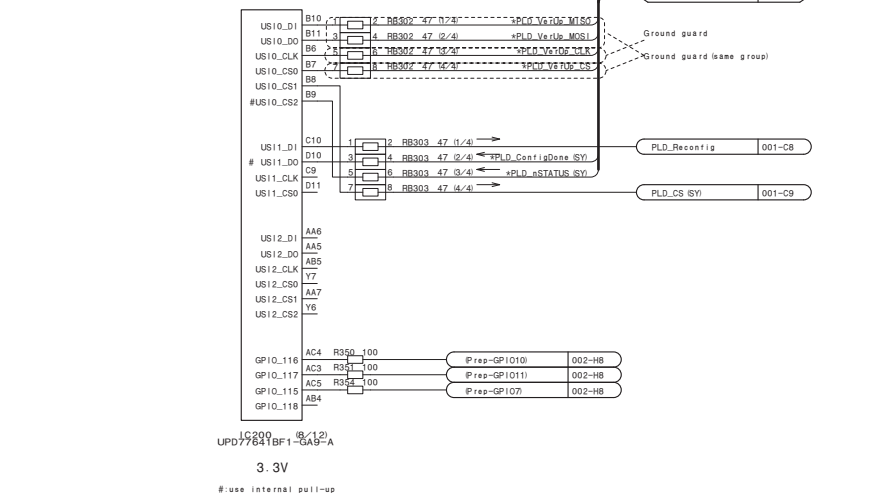


EMMA Mobile EV1 GPIO/SPI/System/Power

AT-189E (3/4)


BOARD NO. 1-885-937-21
AT-189_3

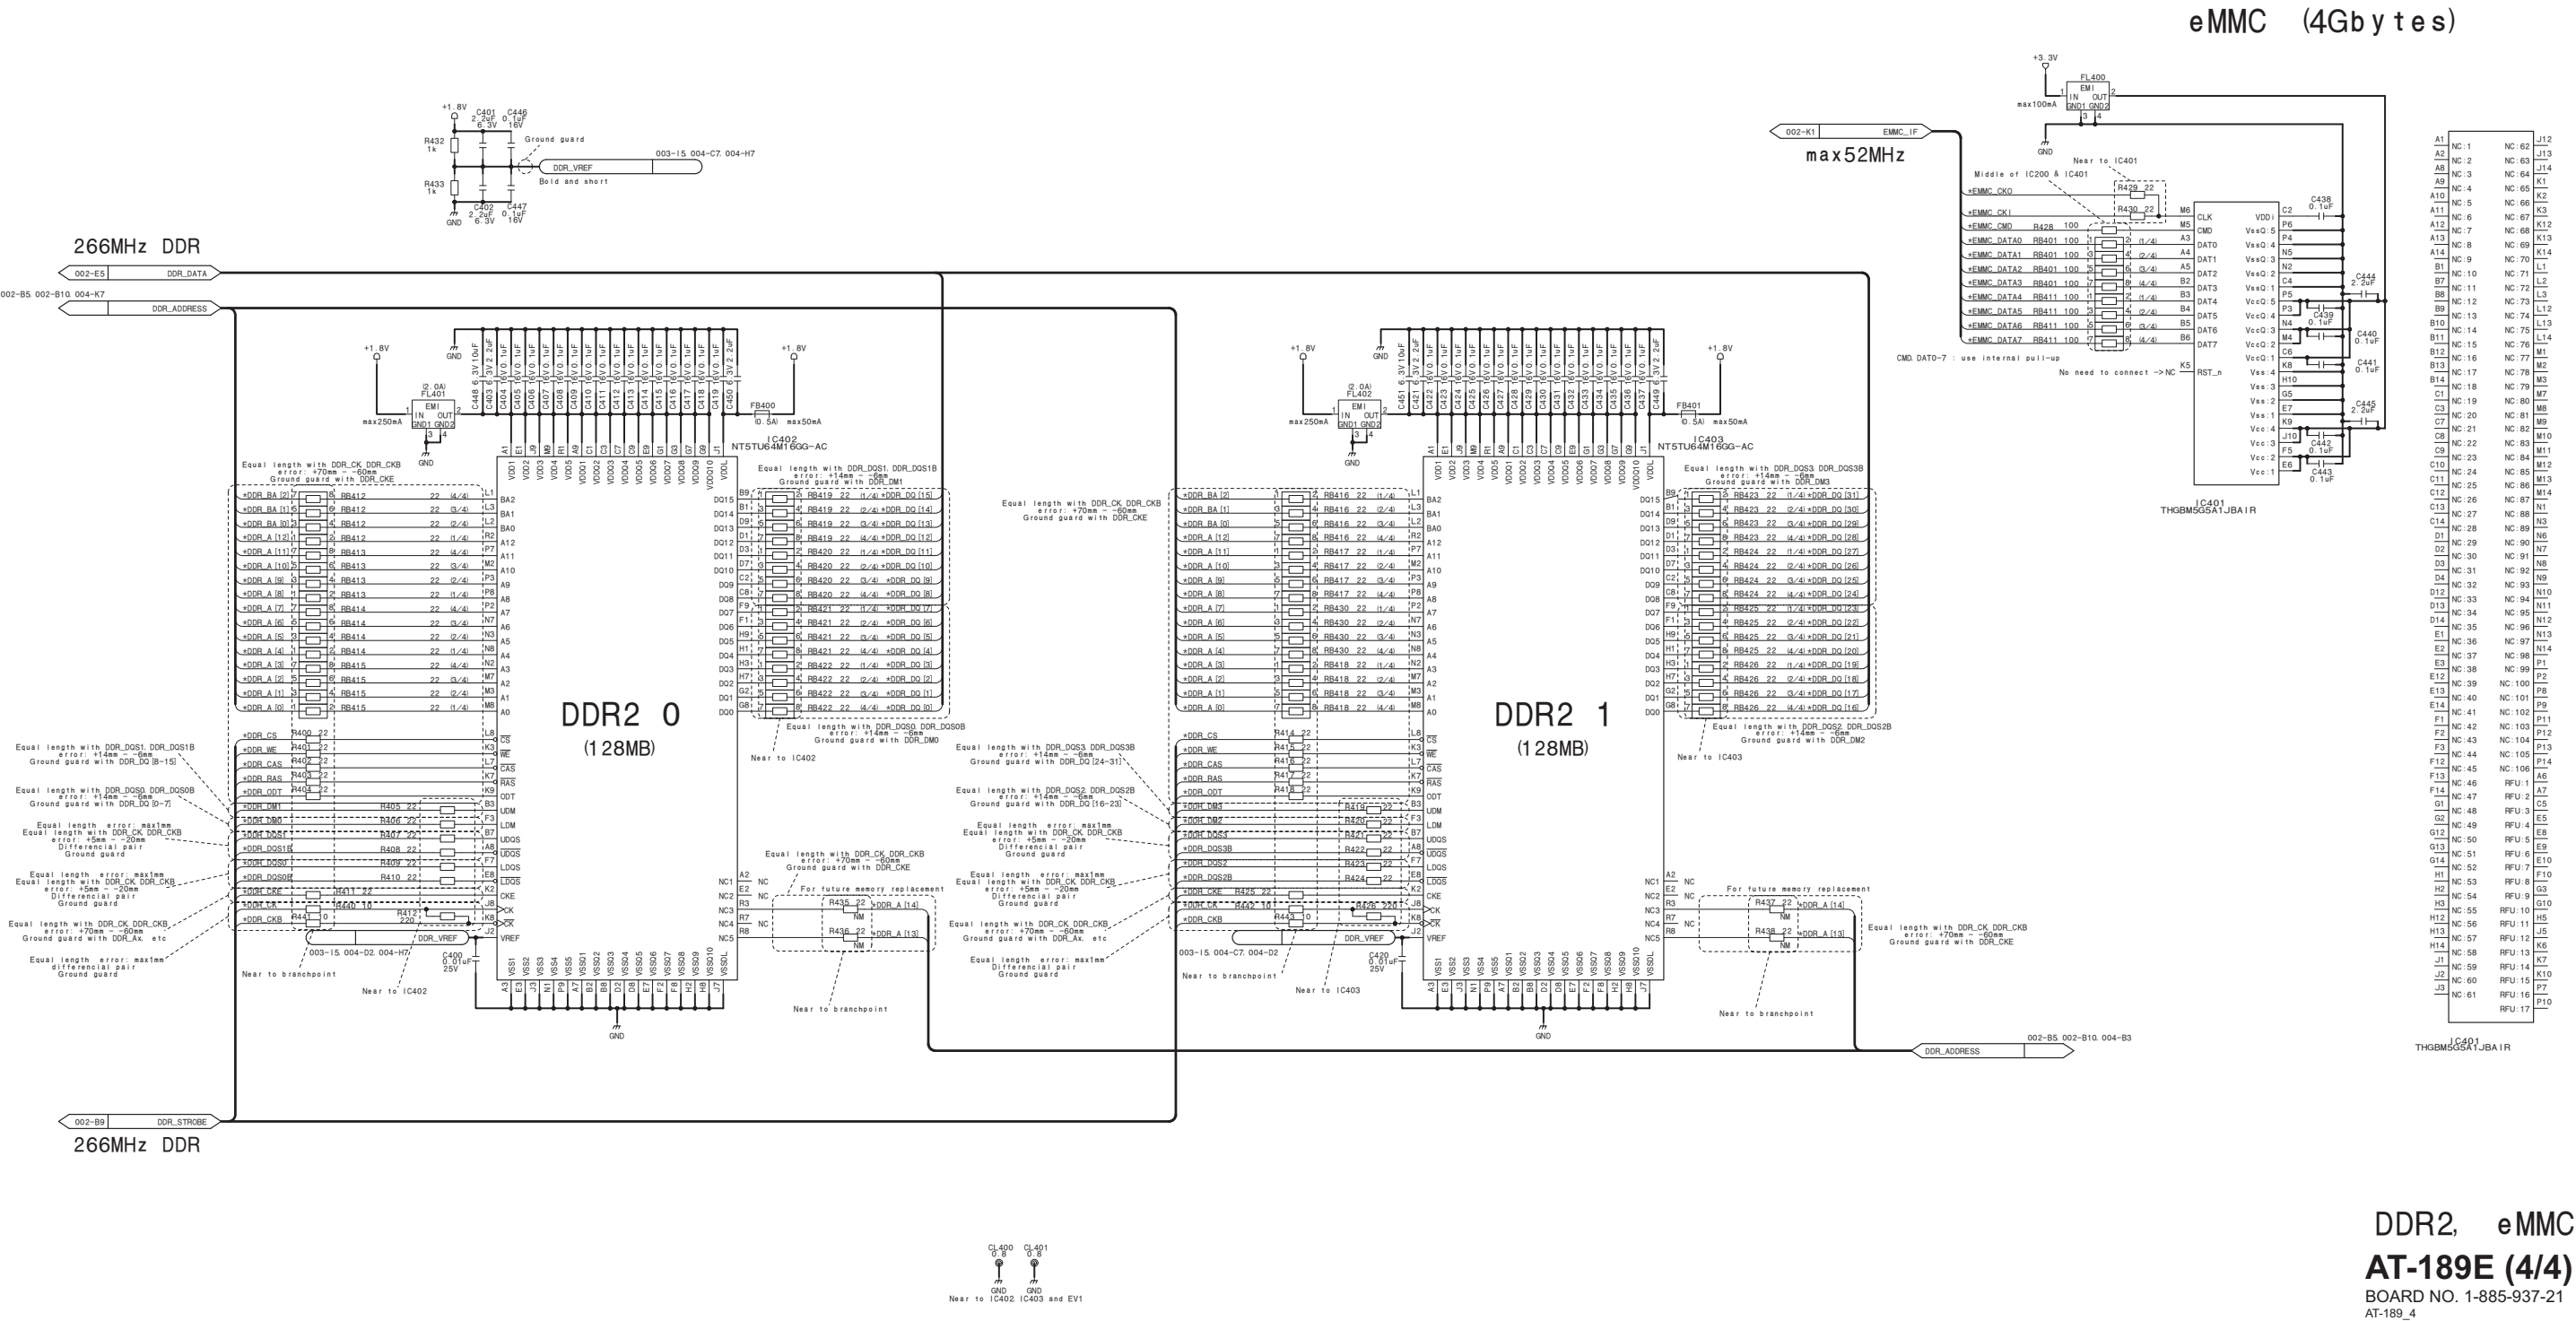


CD-78
CD-78 (1/16)

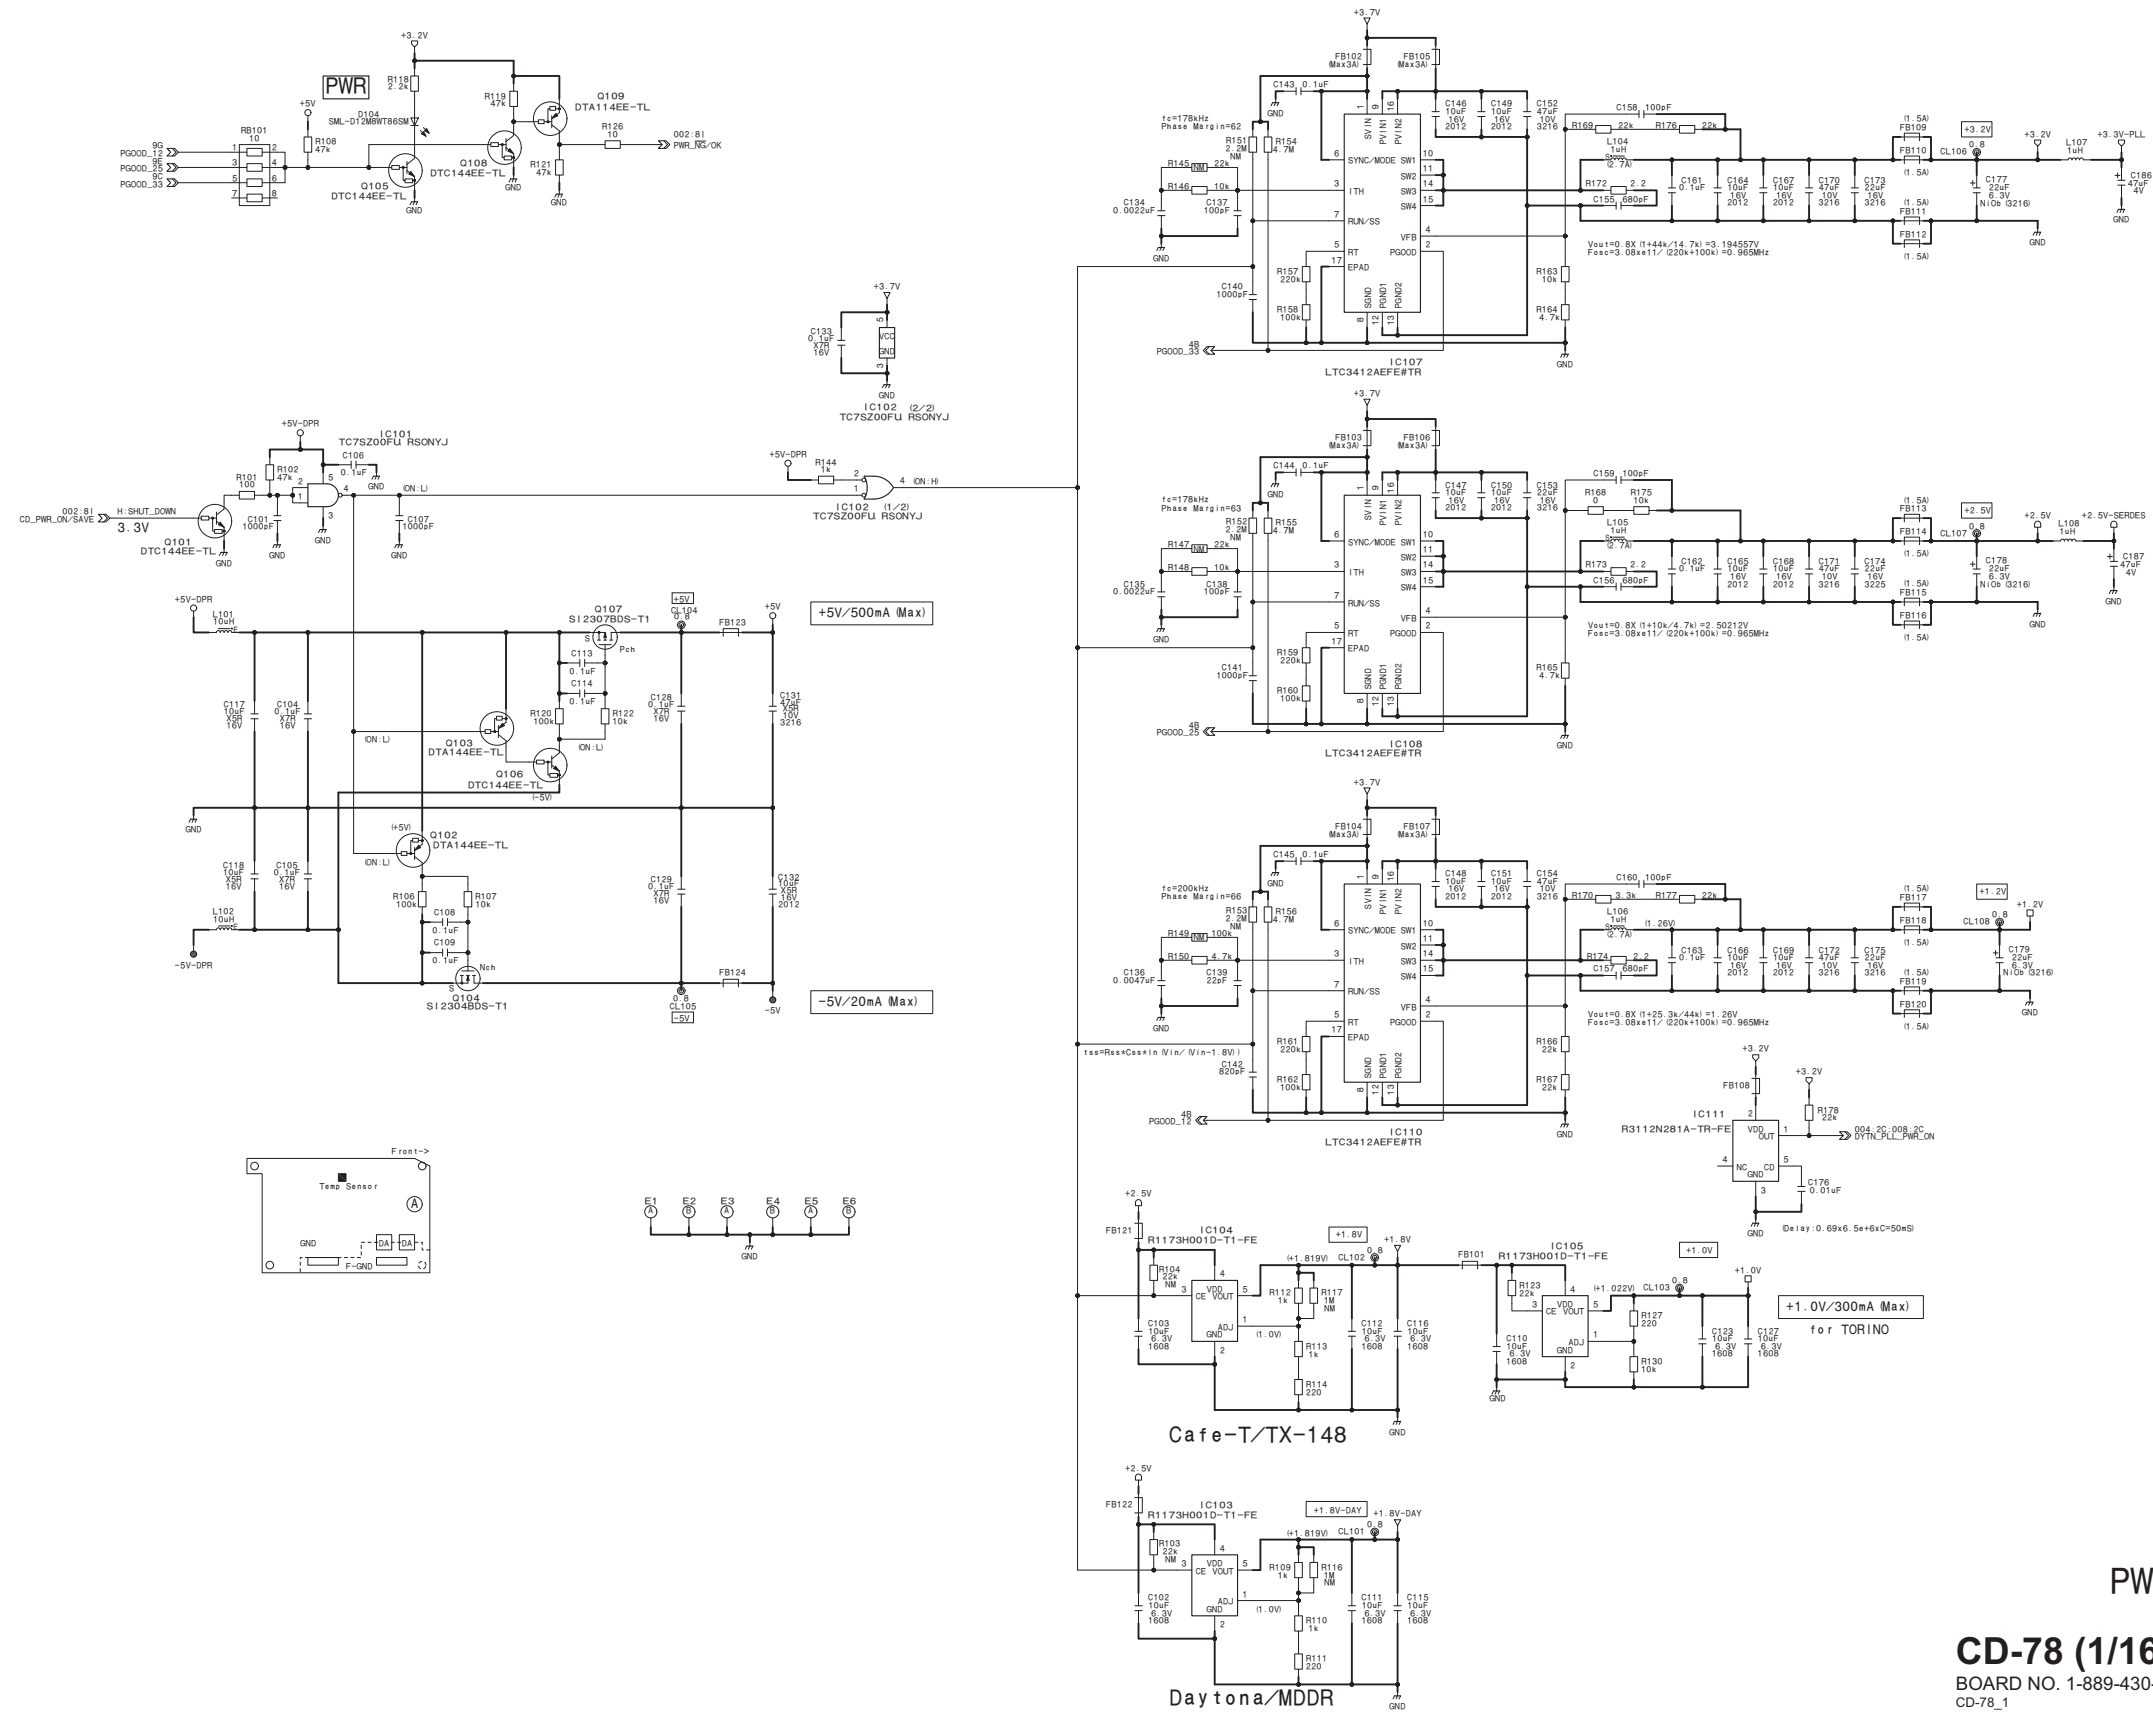

CN from/to DPR

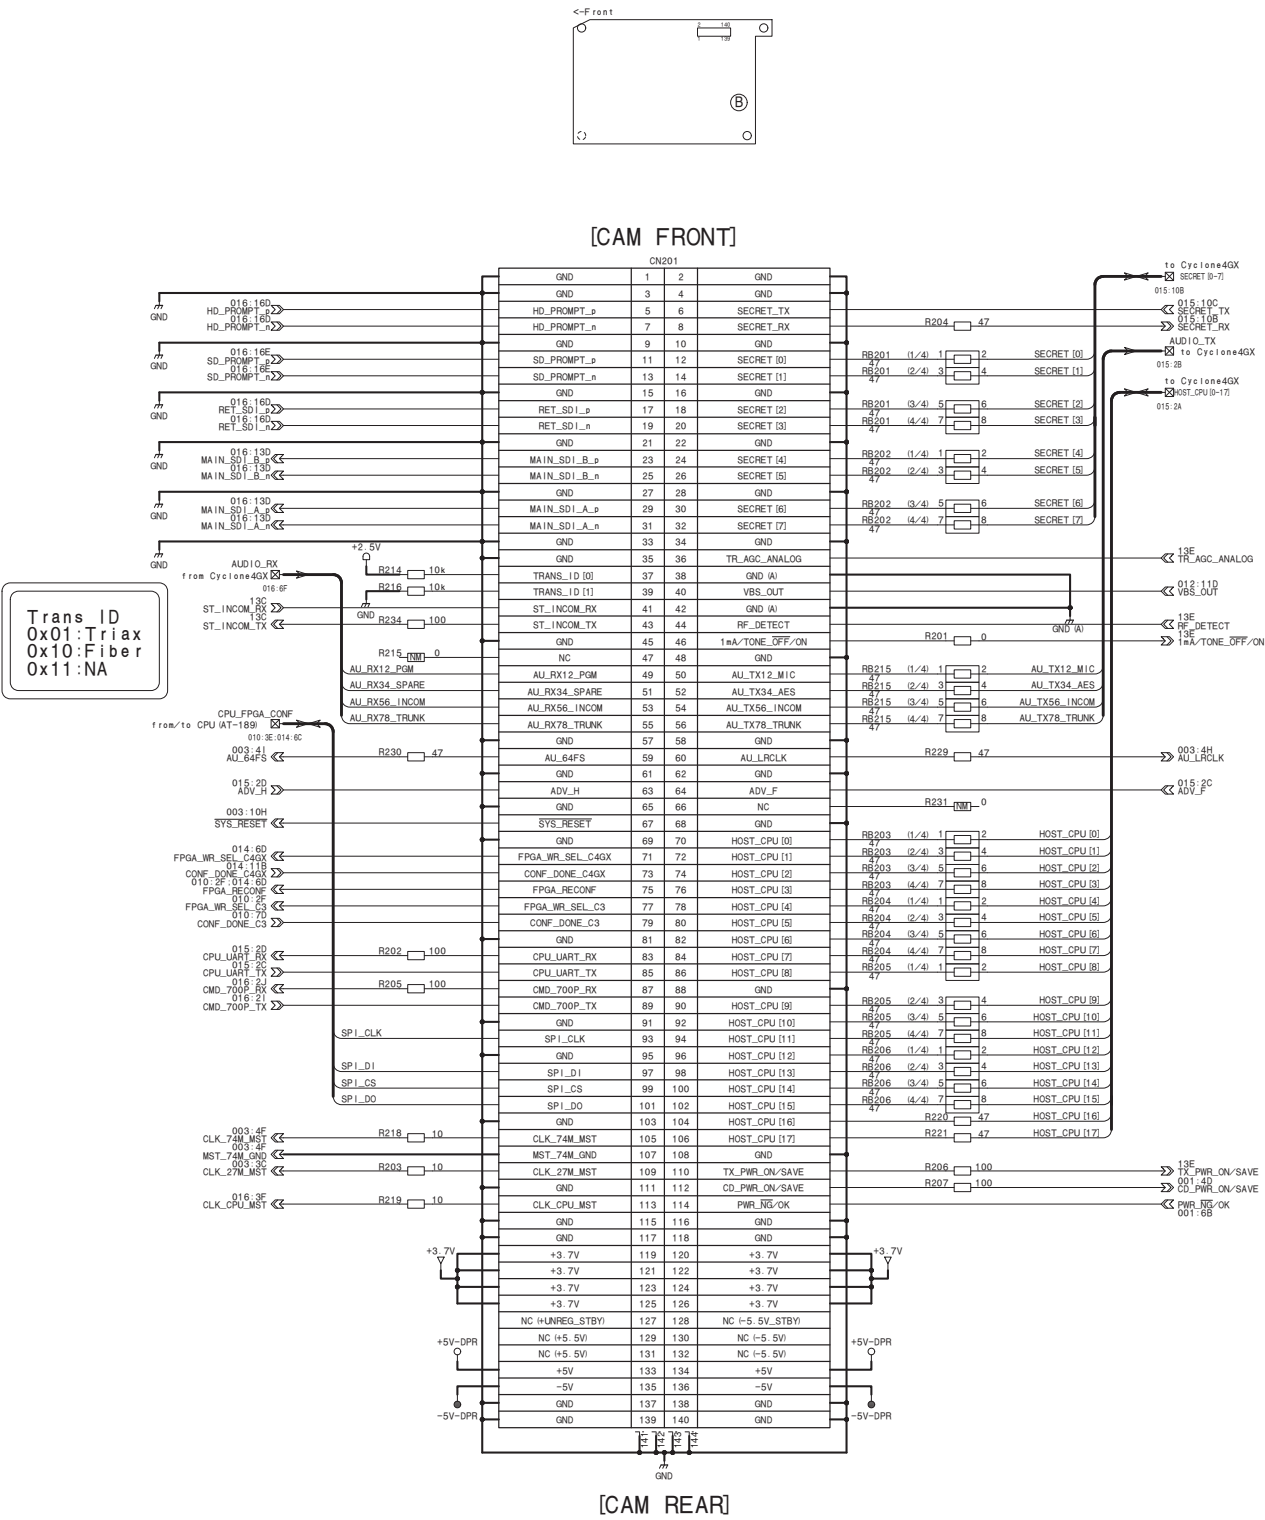

CN from/to TX



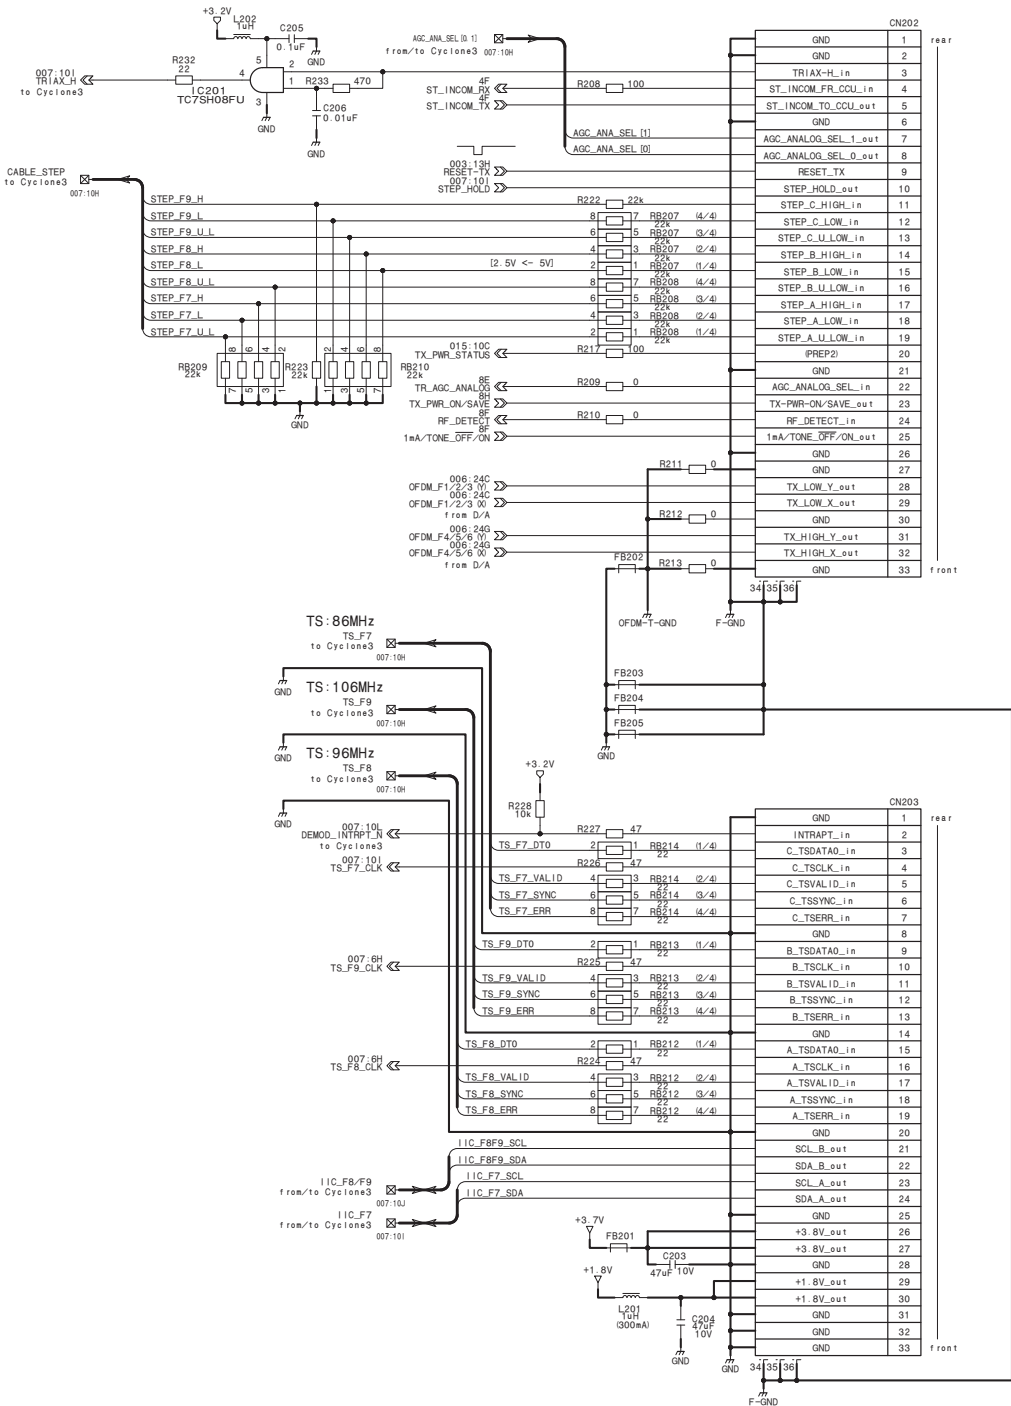


CN (DPR/TX)

CD-78 (2/16)



BOARD NO. 1-889-430-11
CD-78_2

CD-78 (3/16)

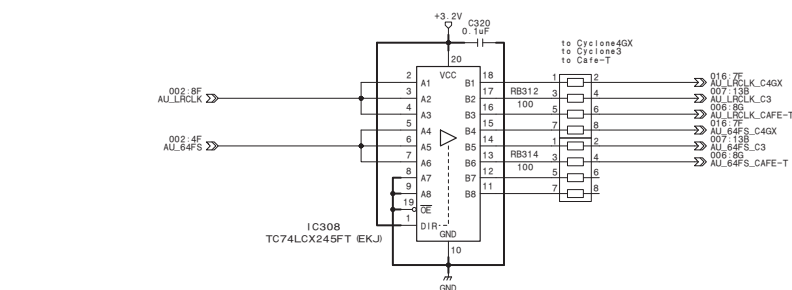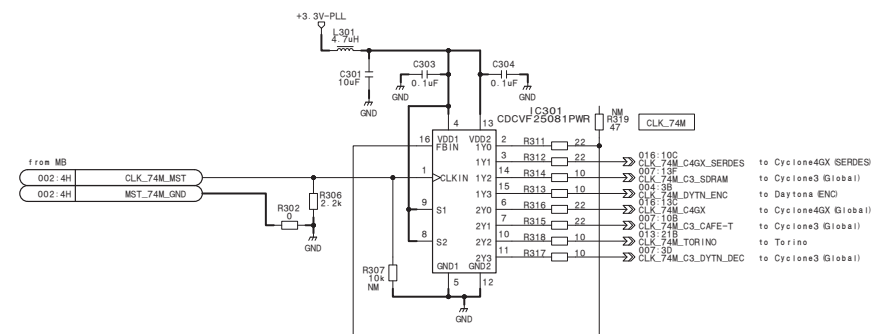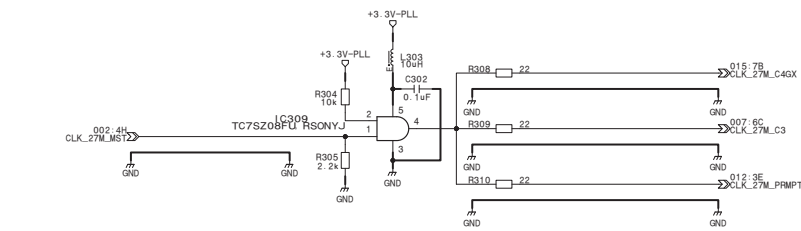


CLOCK

CPU_I/F

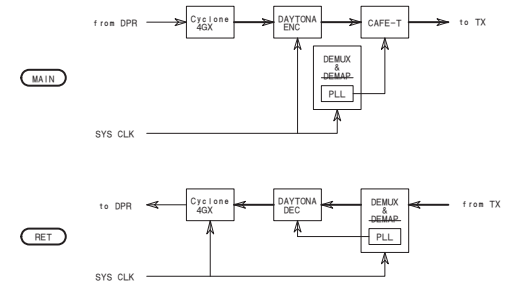
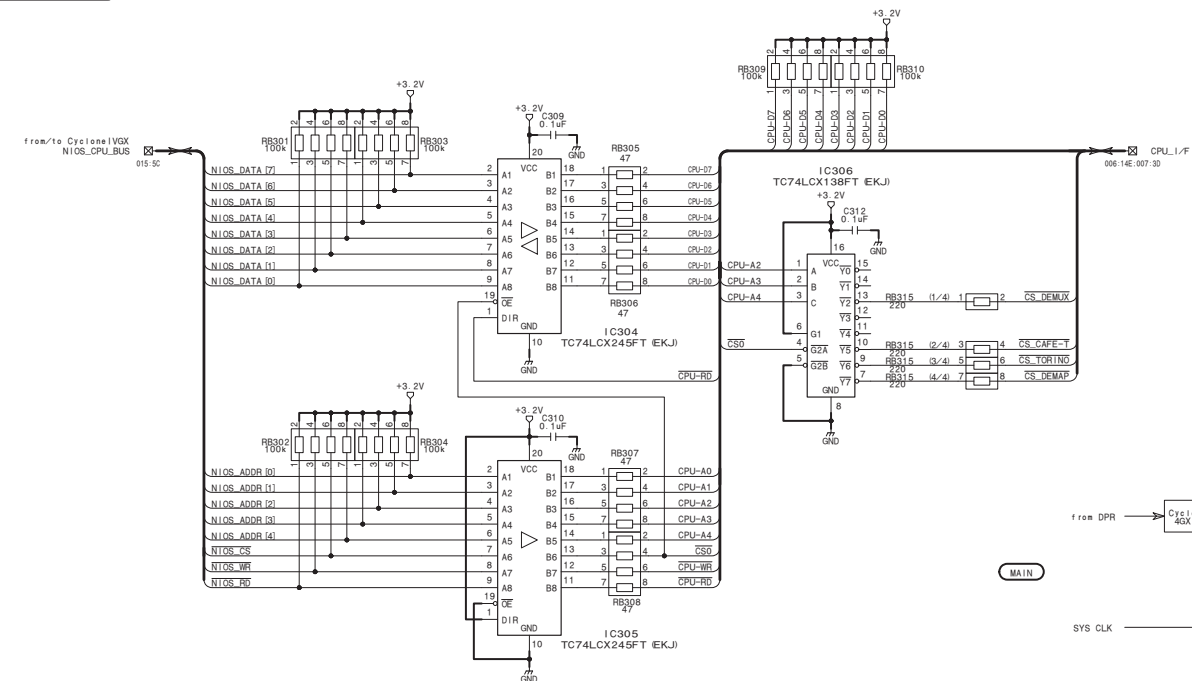


RESET

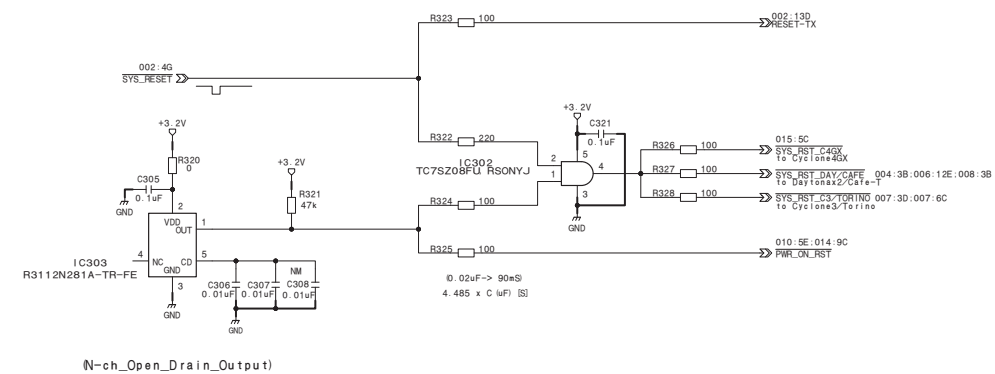

CLK/RESET/CPU
CD-78 (3/16)
BOARD NO. 1-889-430-11
CD-78_3


CD-78 (4/16)

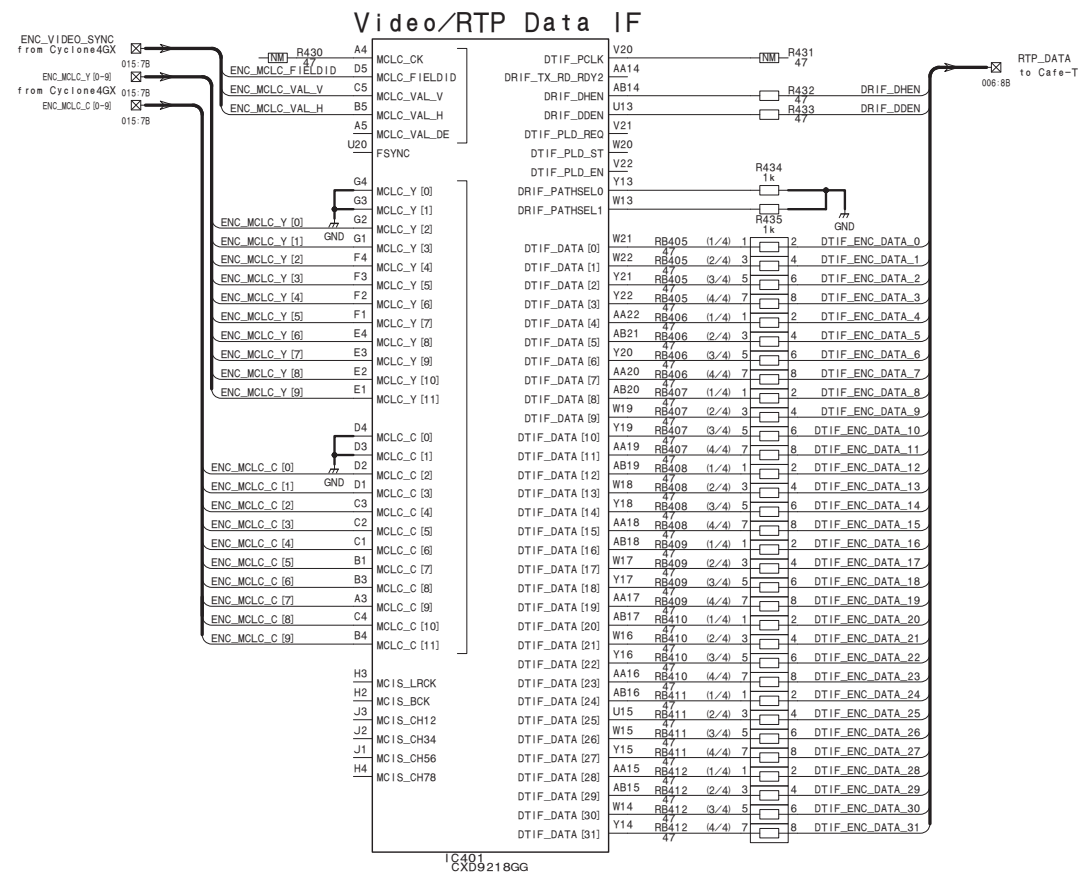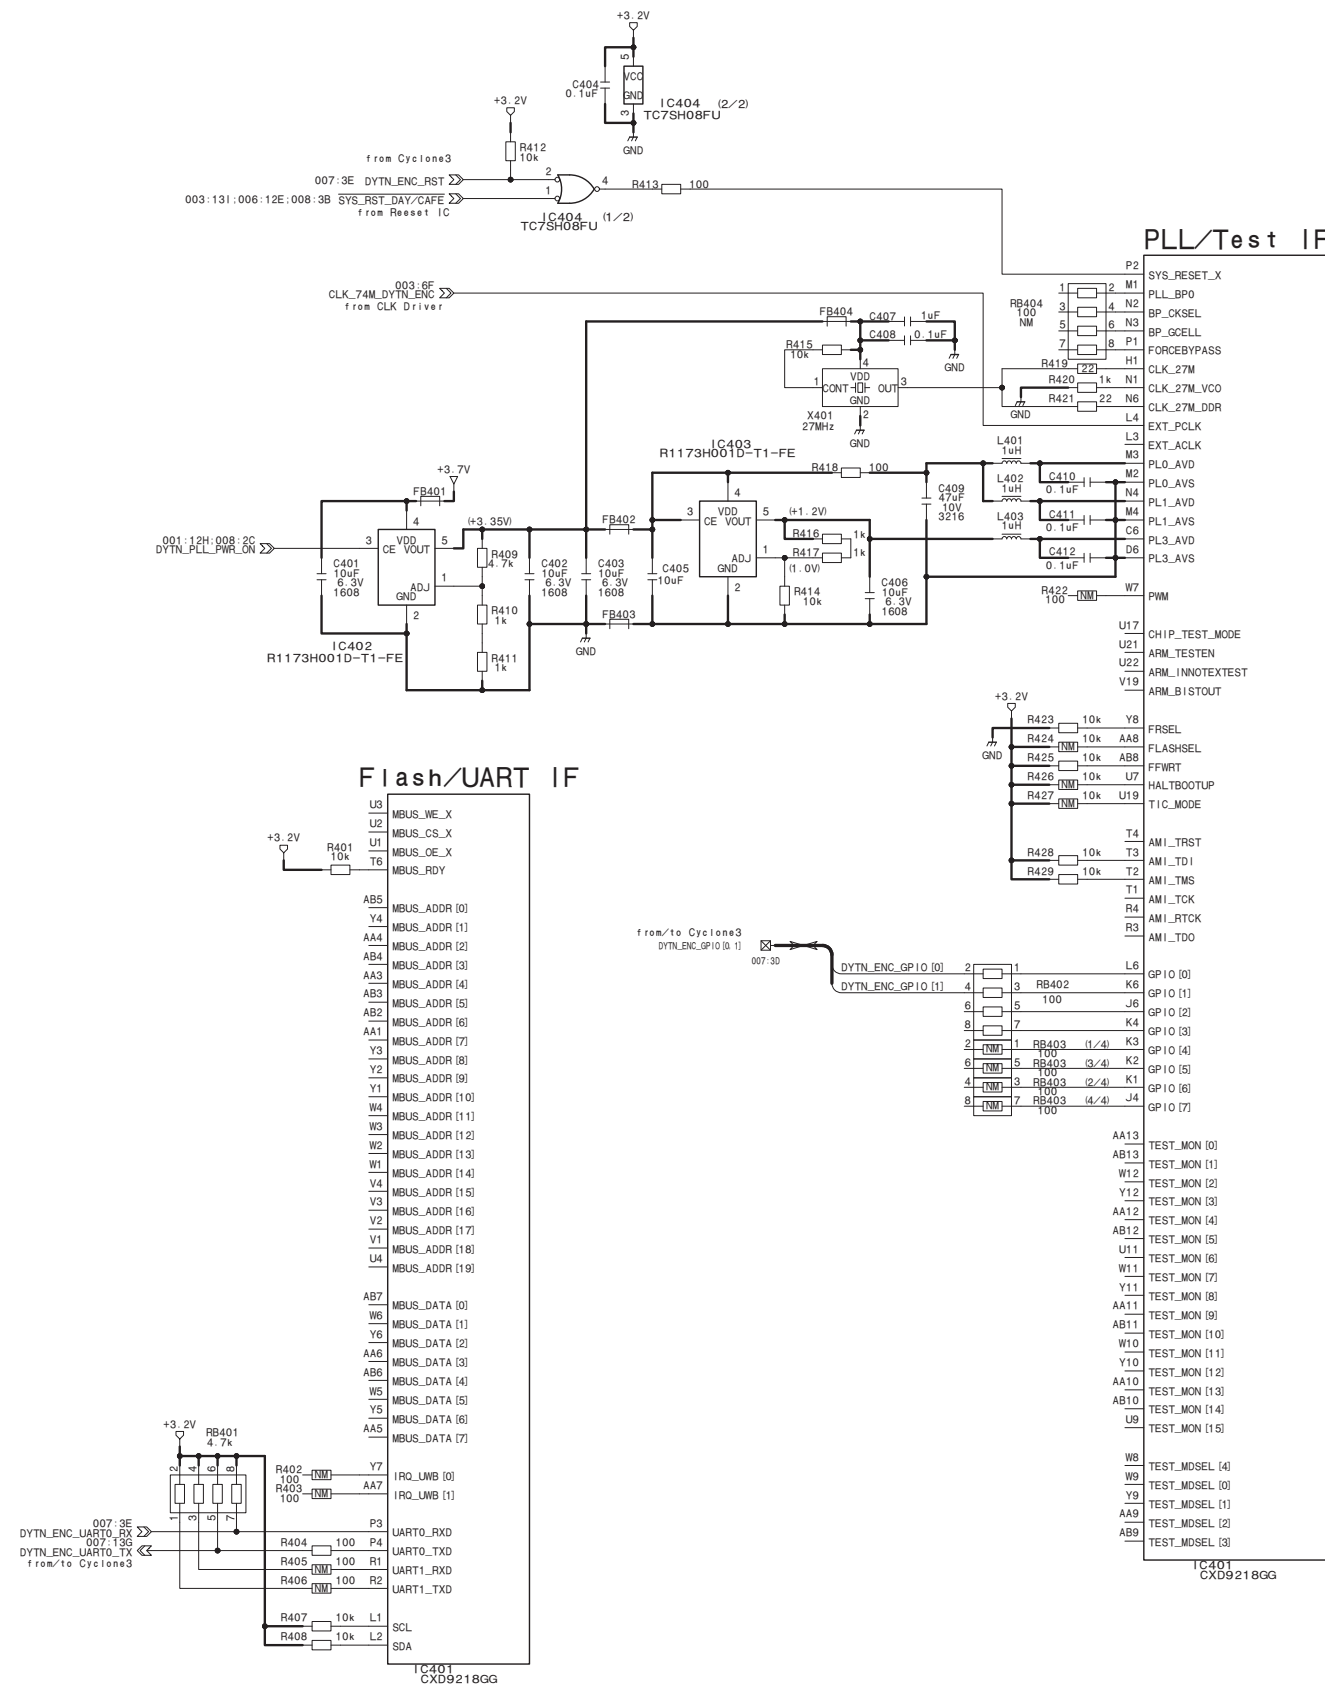


Daytona Main Stream ENC (1/2)


CD-78 (4/16)


BOARD NO. 1-889-430-11
CD-78_4

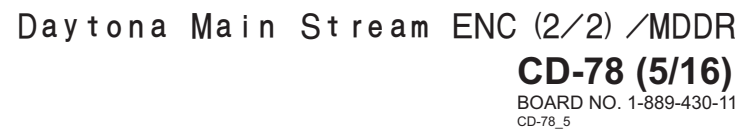


CD-78 (6/16)_L

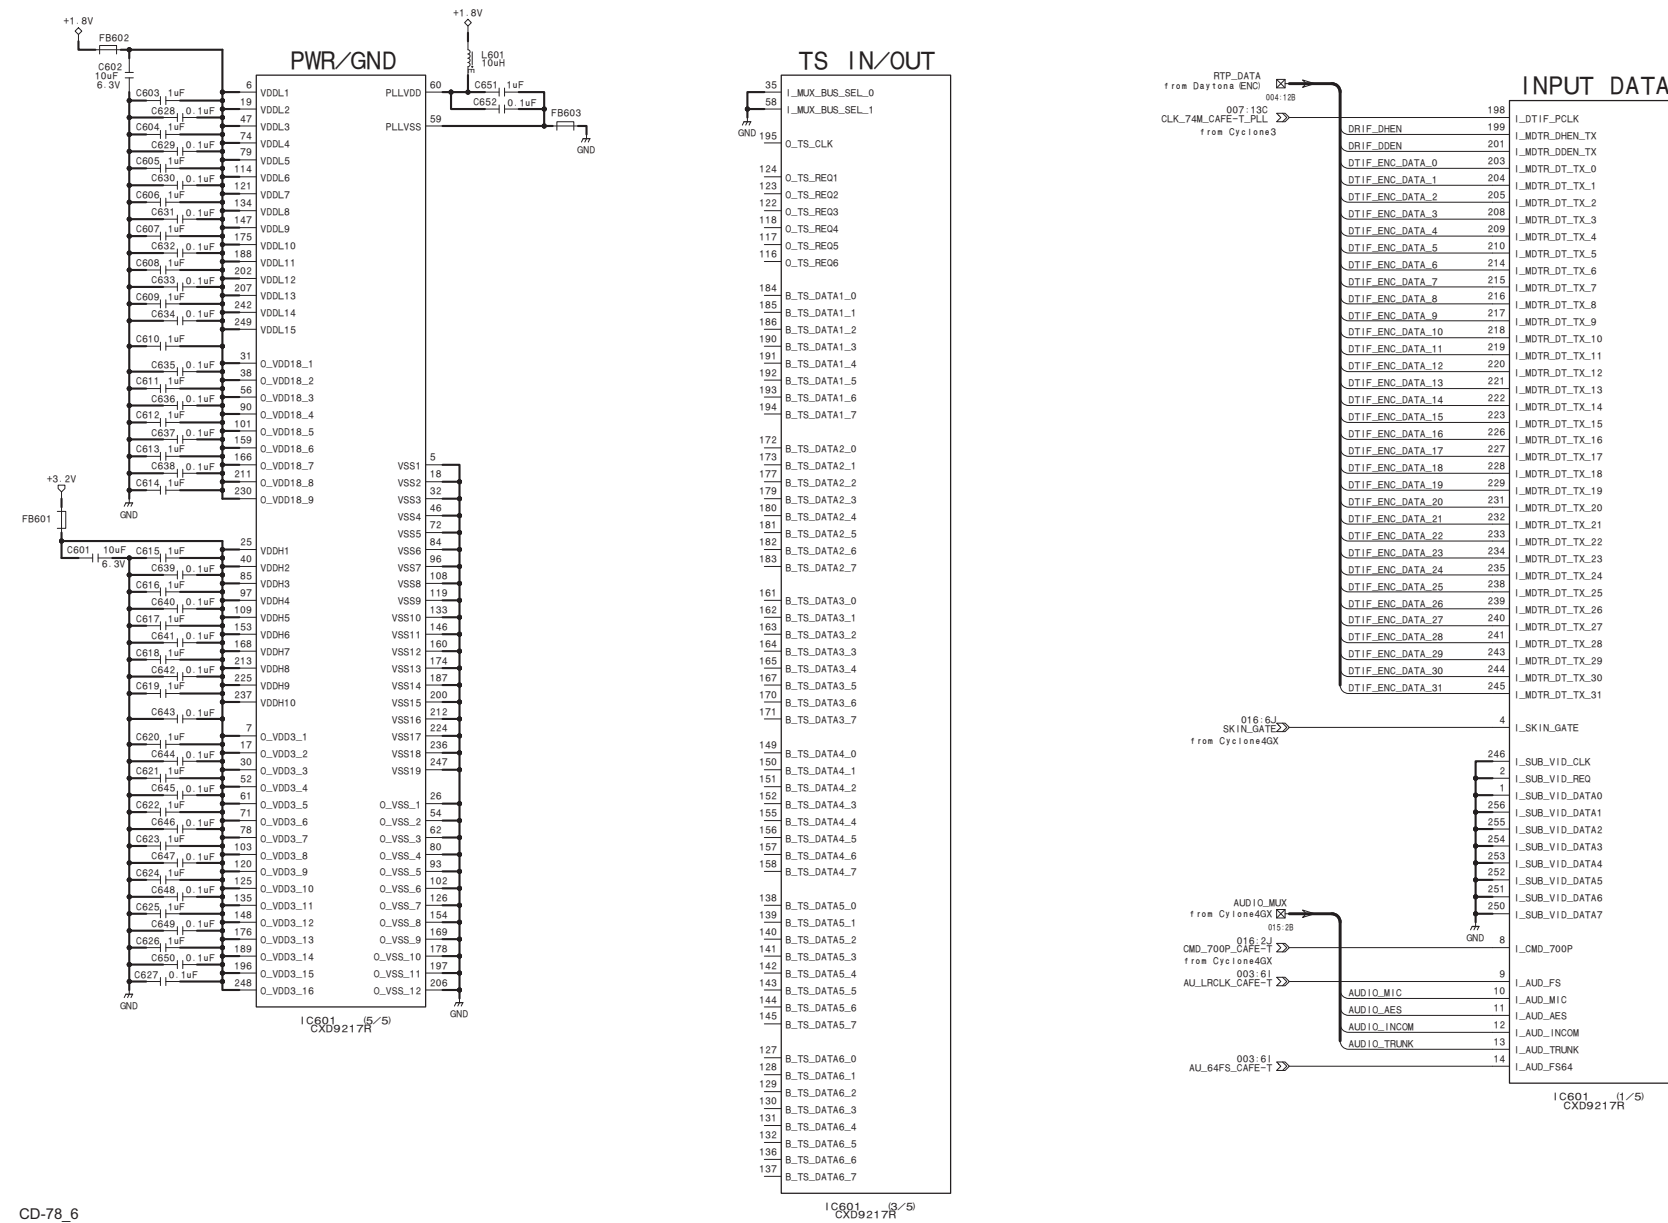





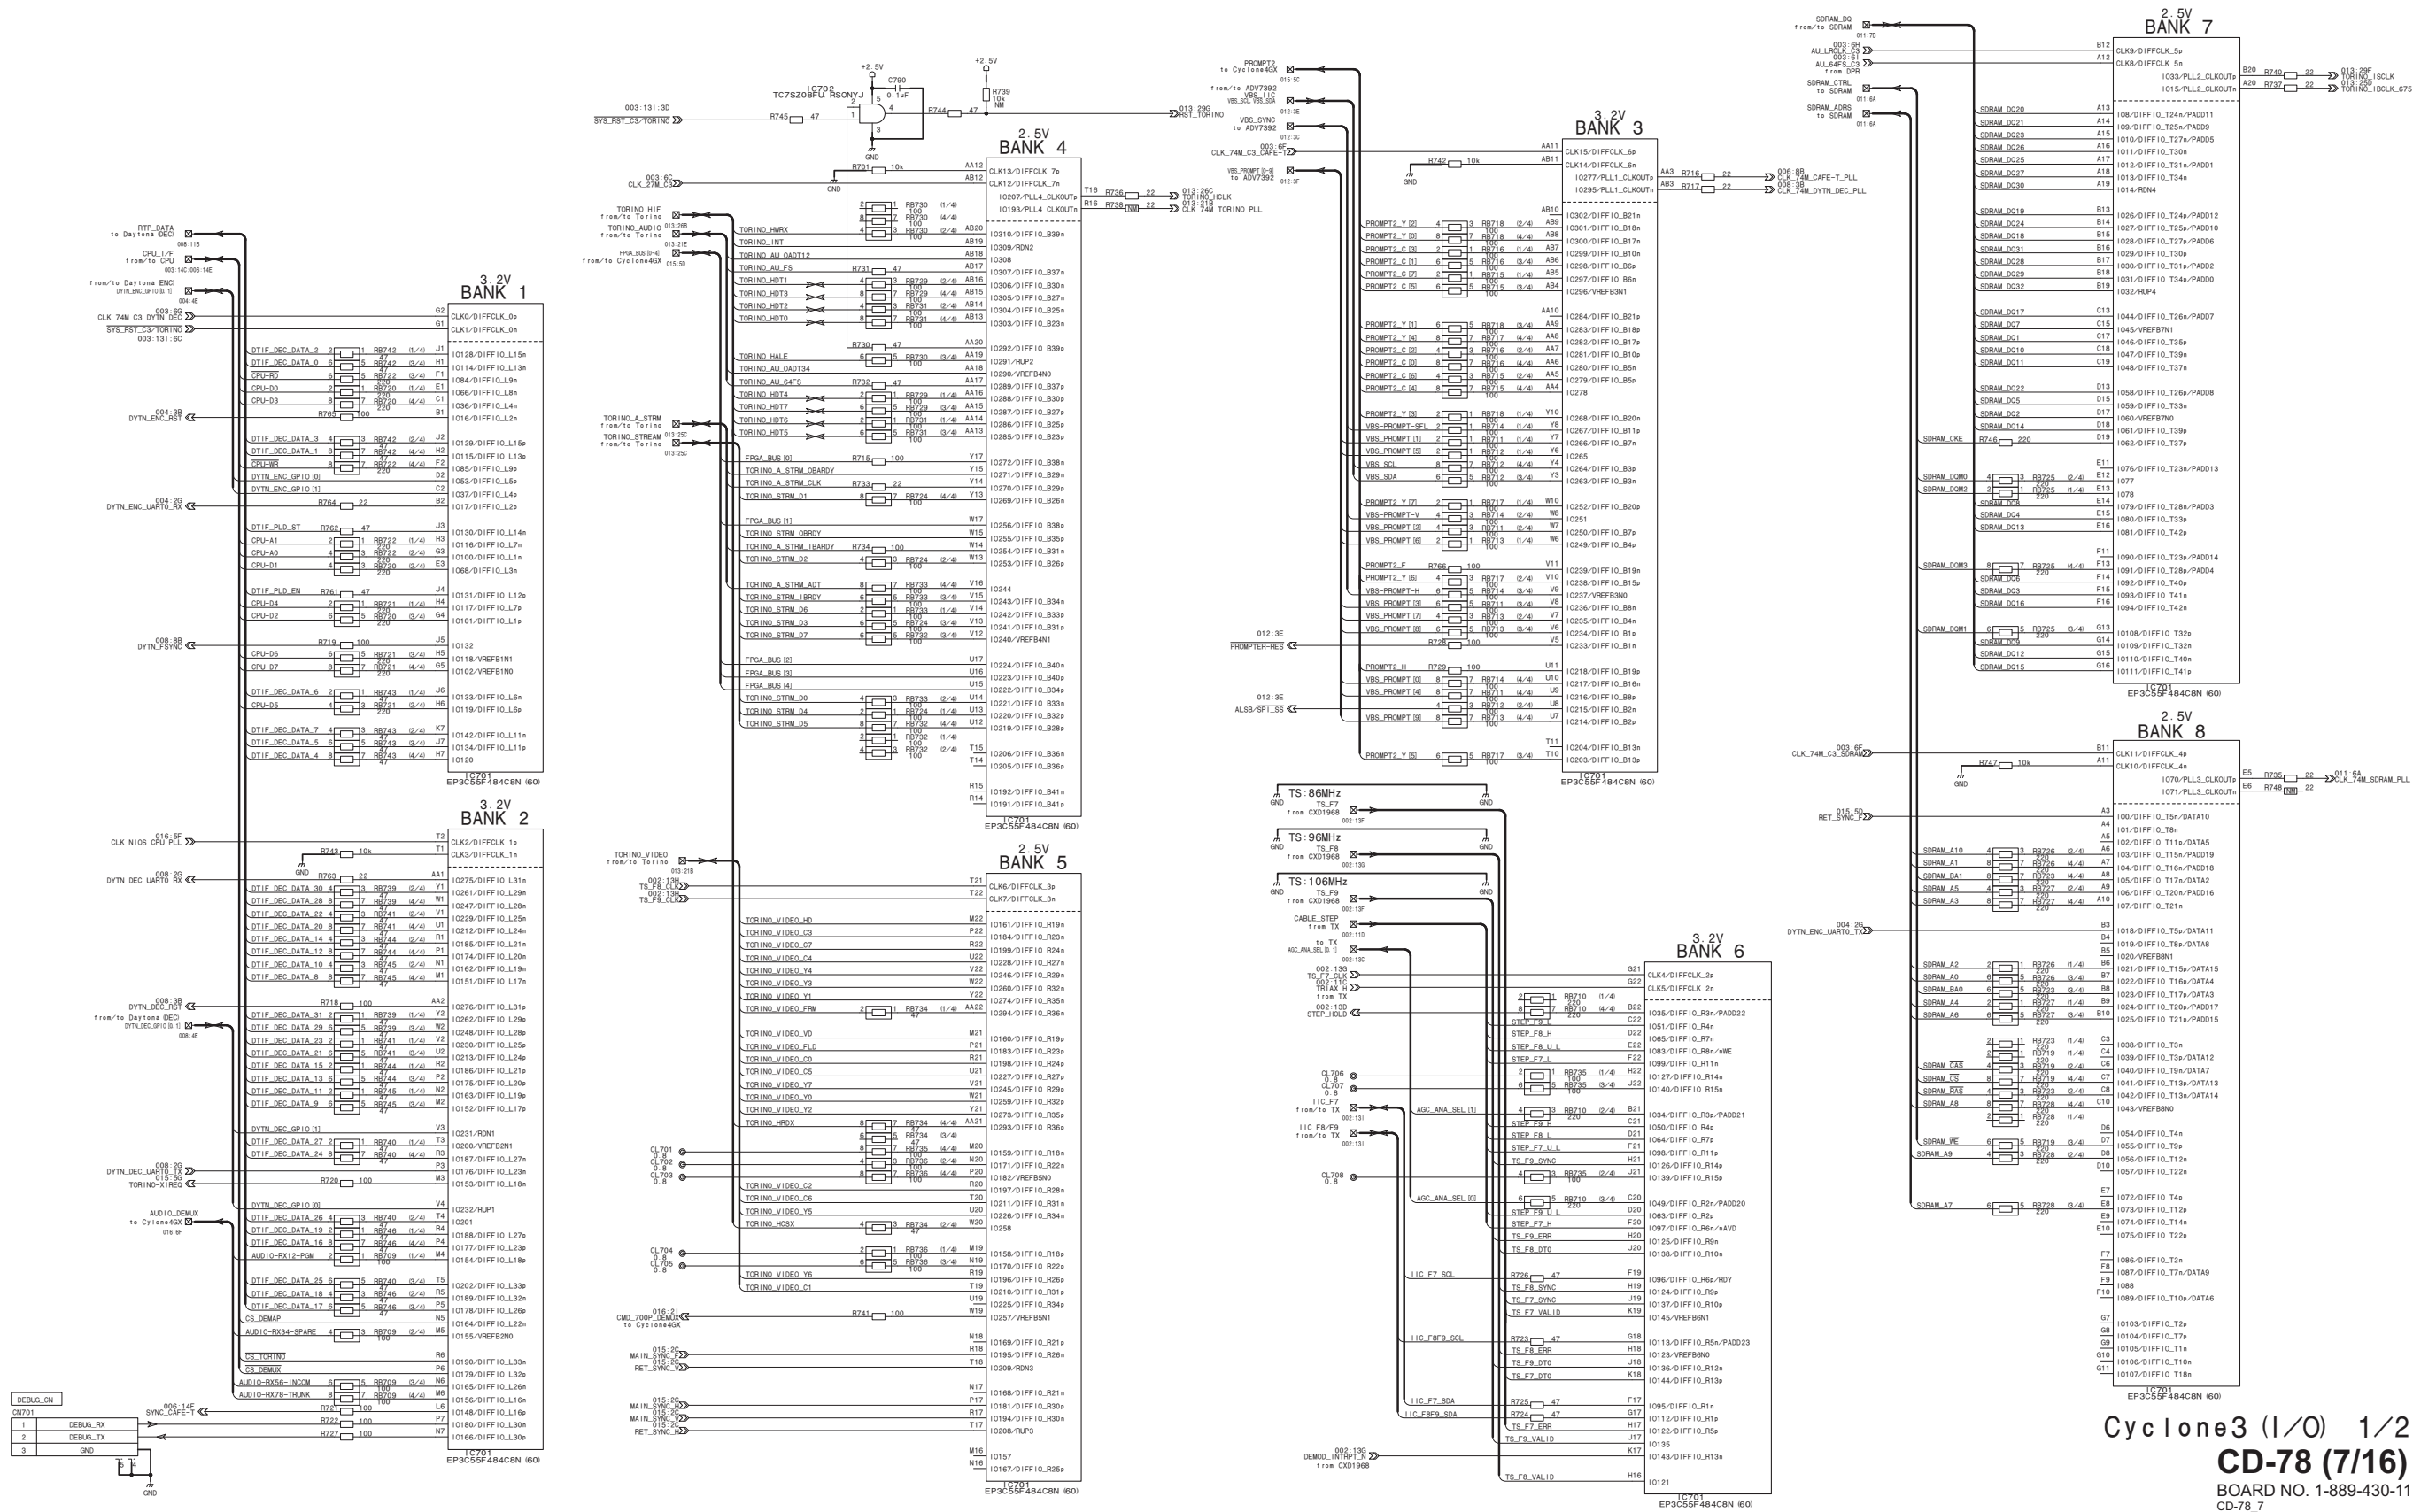CD-78 (7/16)


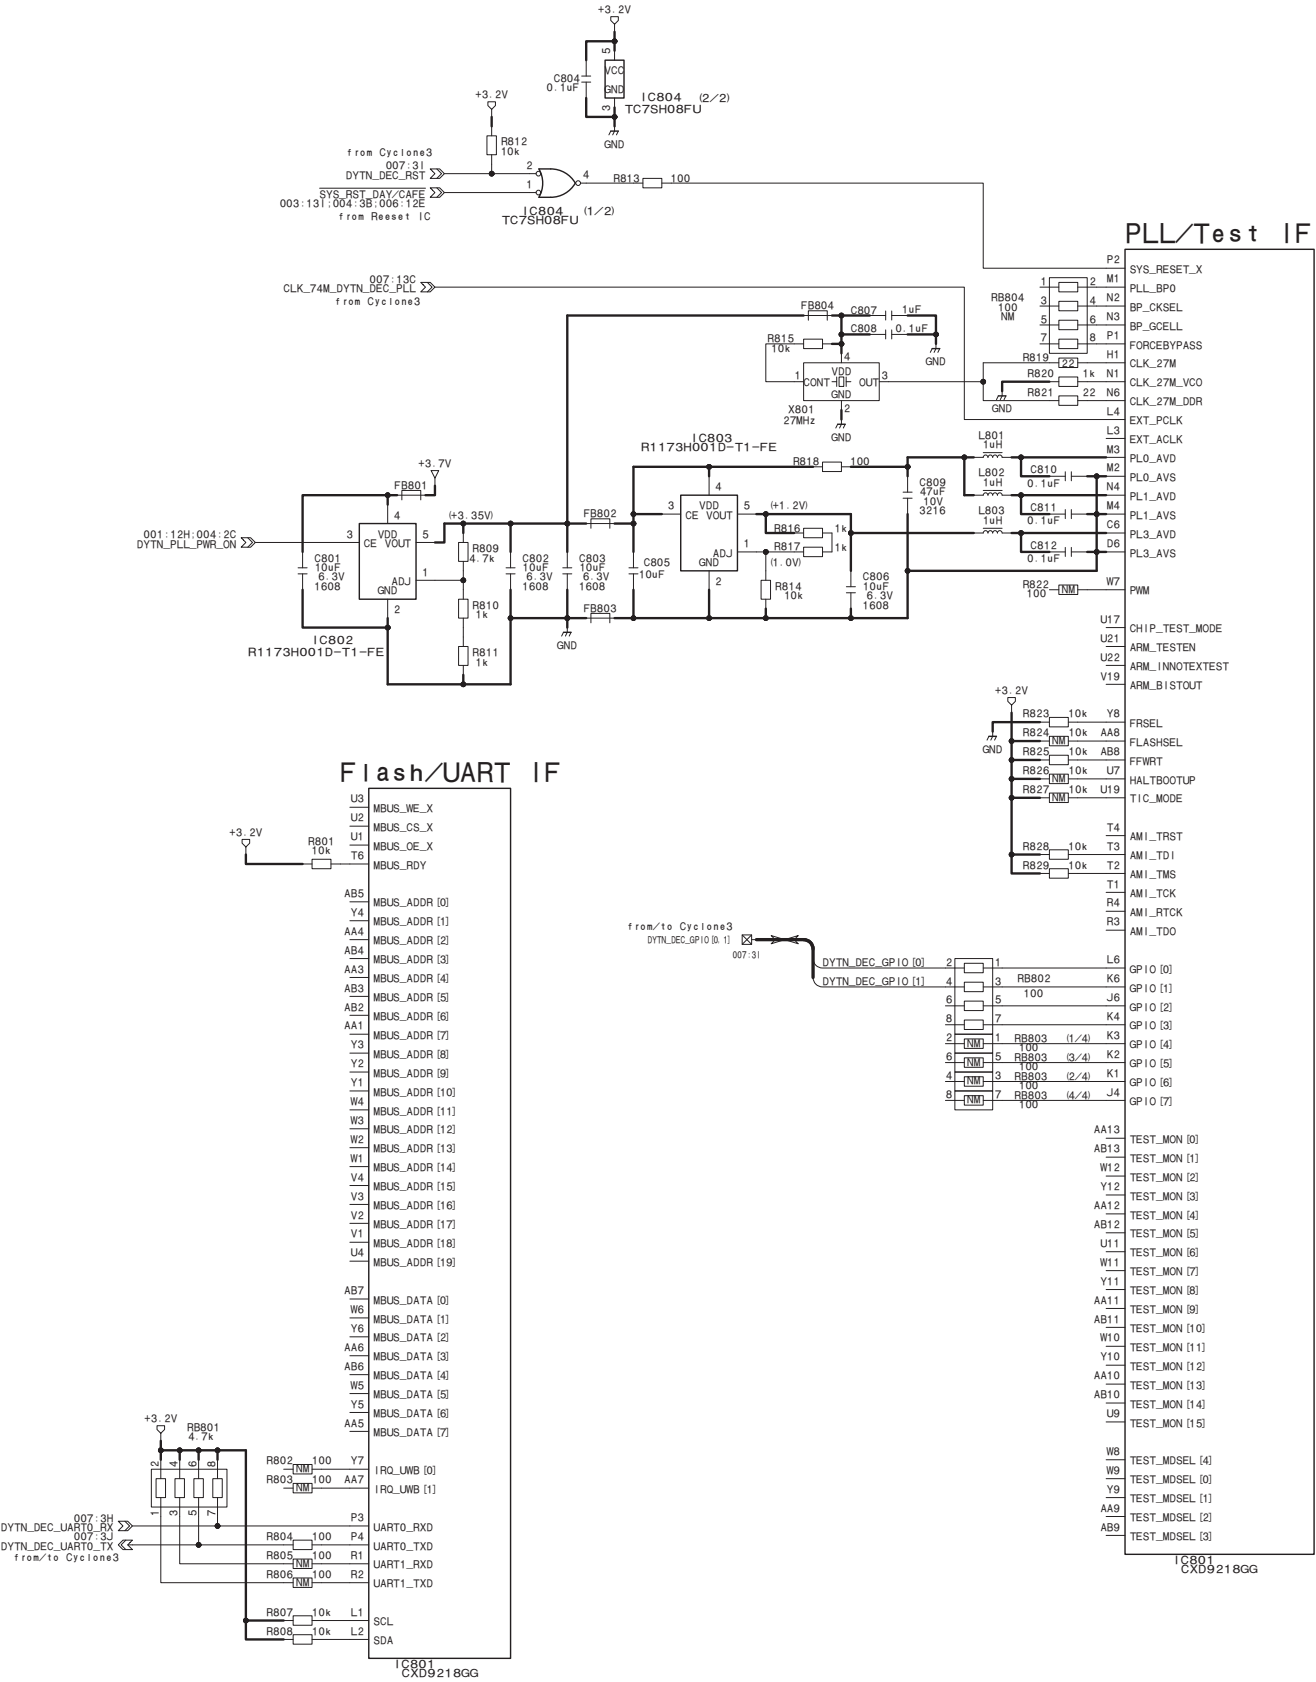


Daytona Retrun Stream DEC (1/2)

CD-78 (8/16)
BOARD NO. 1-889-430-11
CD-78_8

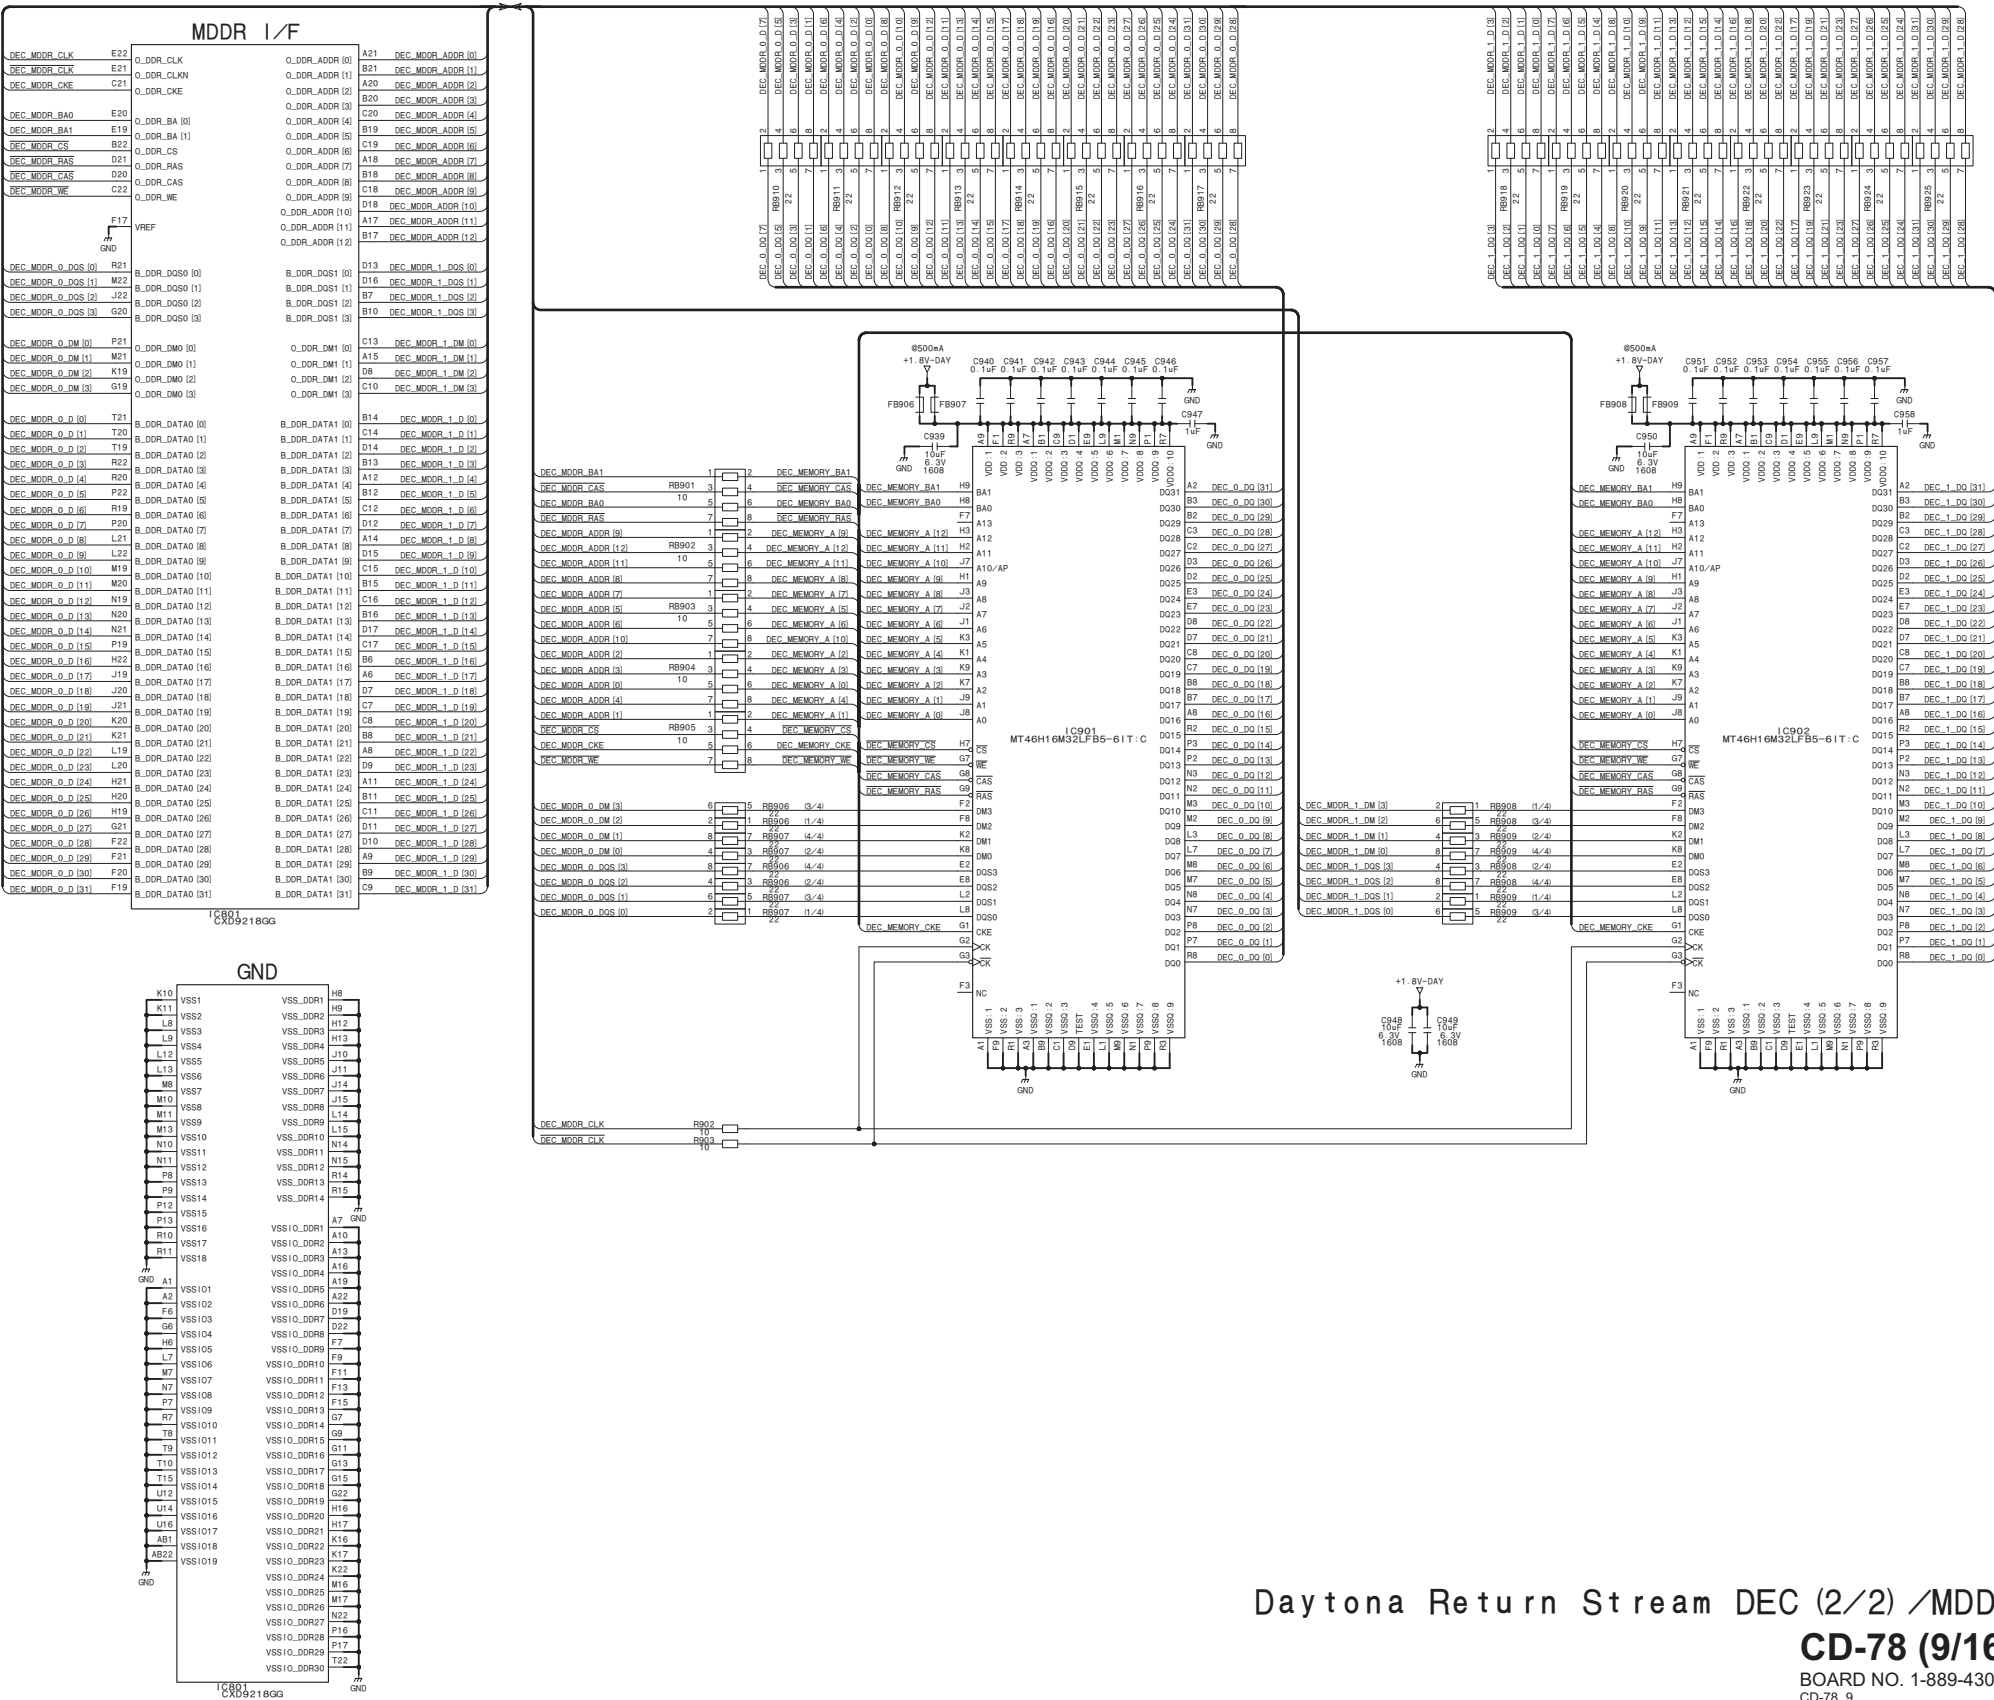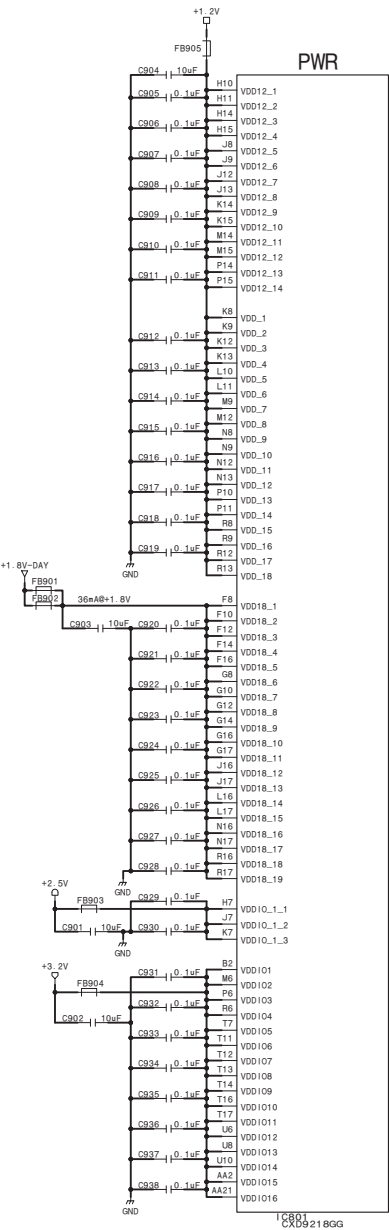

CD-78 (10/16)

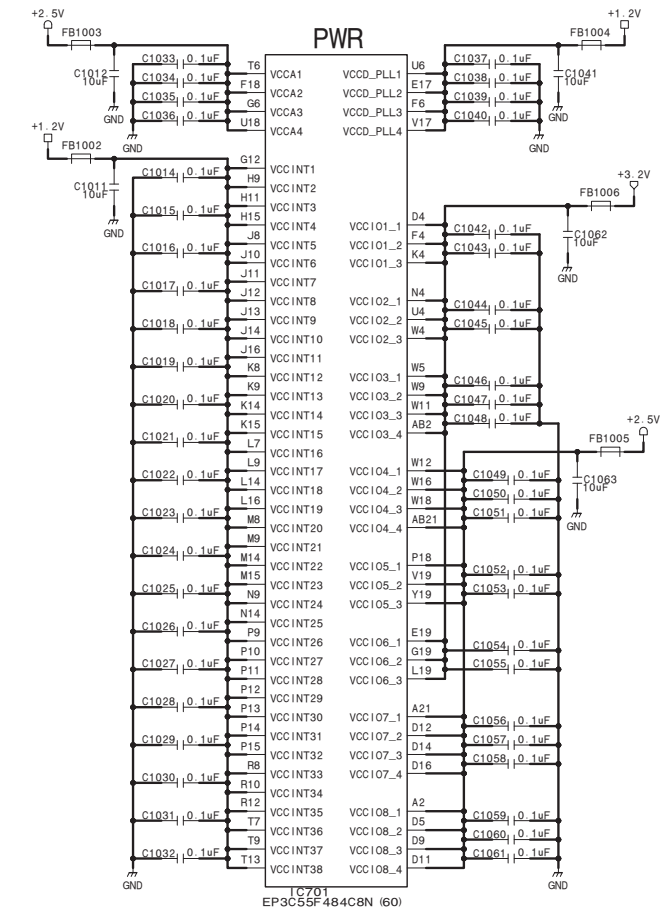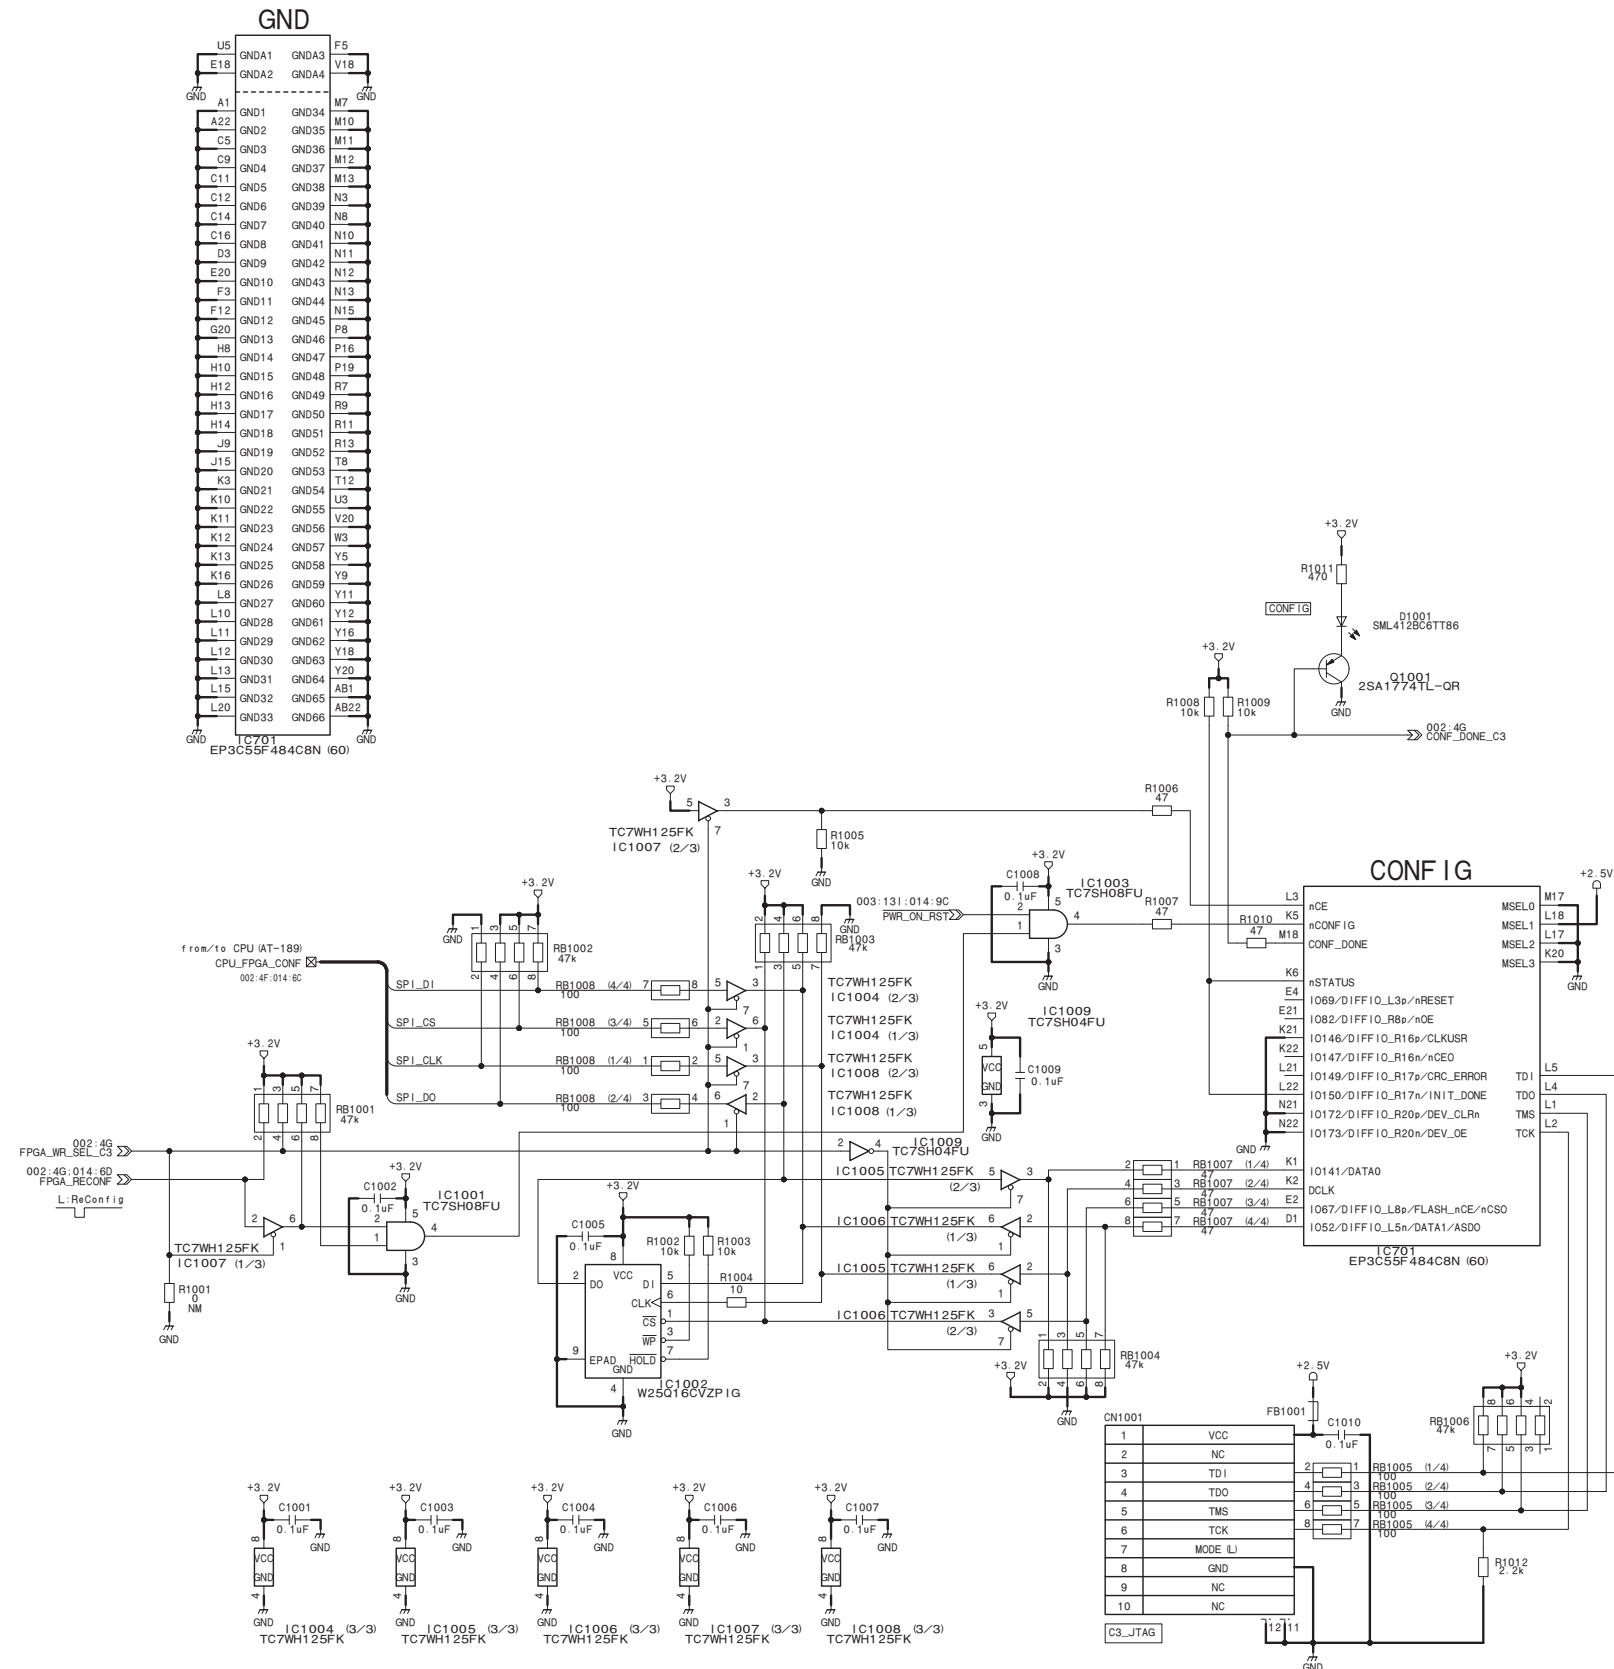


```
Configuration Voltage = 3.3V
MSEL [3:0] = 0, 0, 1, 0
Config Mode = AS (50ms<POR<200ms)
```


Cyclone3 (CONFIG/PWR/GND) 2/2

CD-78 (10/16)
BOARD NO. 1-889-430-11
CD-78_10

CD-78 (11/16)






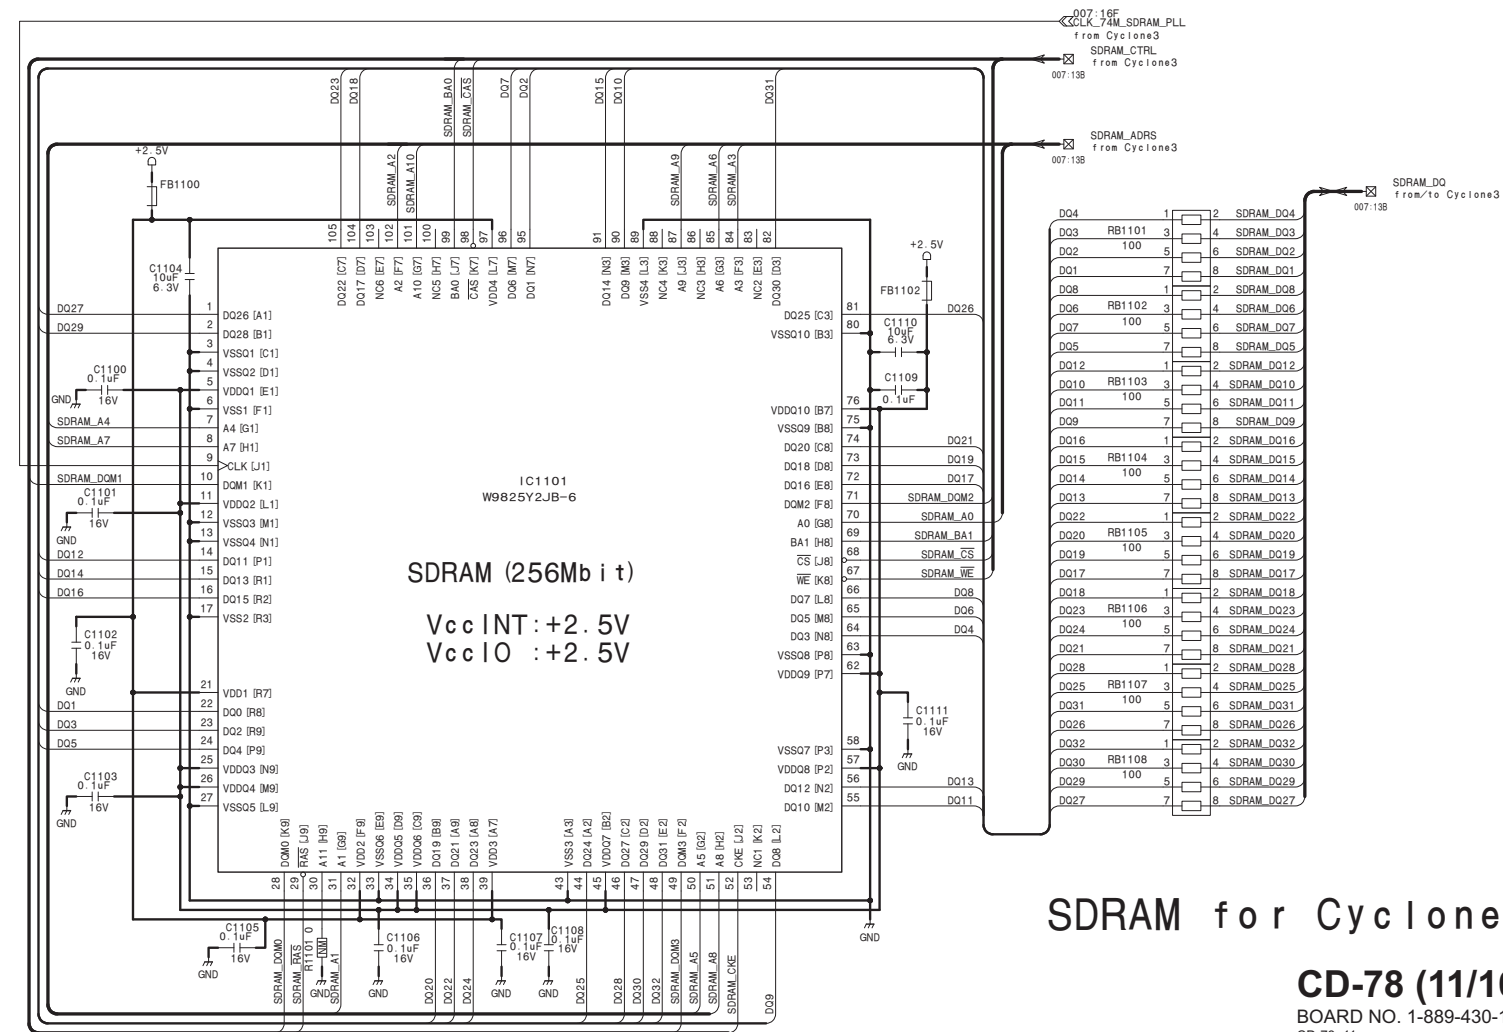


CD-78 (12/16)

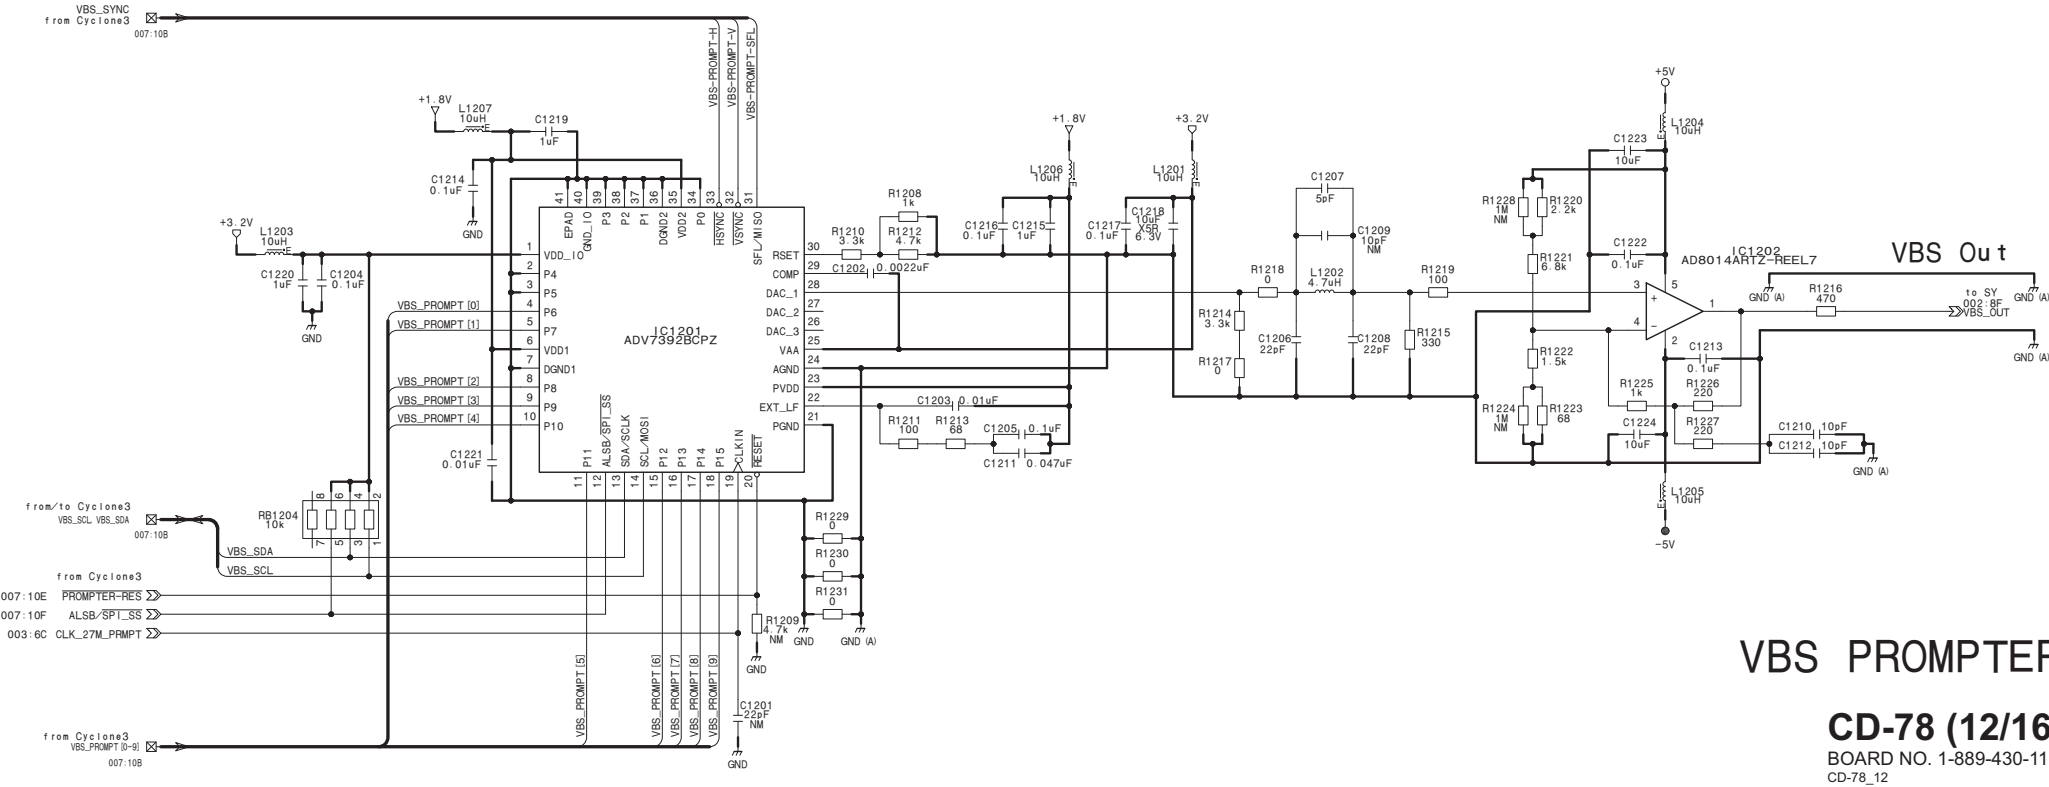


VBS PROMPTER
CD-78 (12/16)
BOARD NO. 1-889-430-11
CD-78_12

CD-78 (13/16)_L

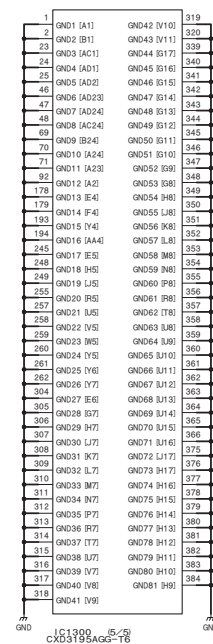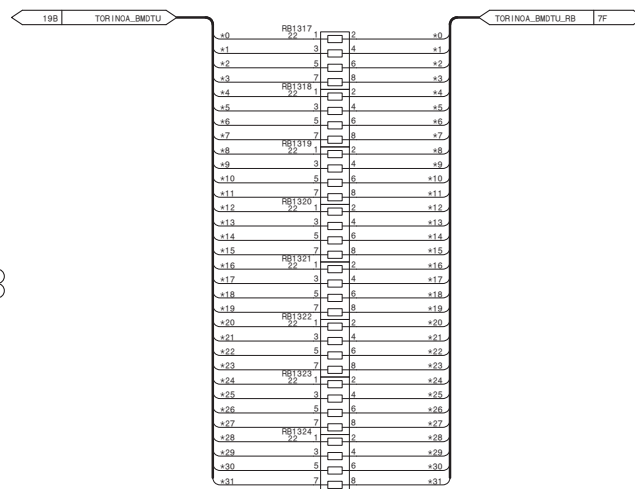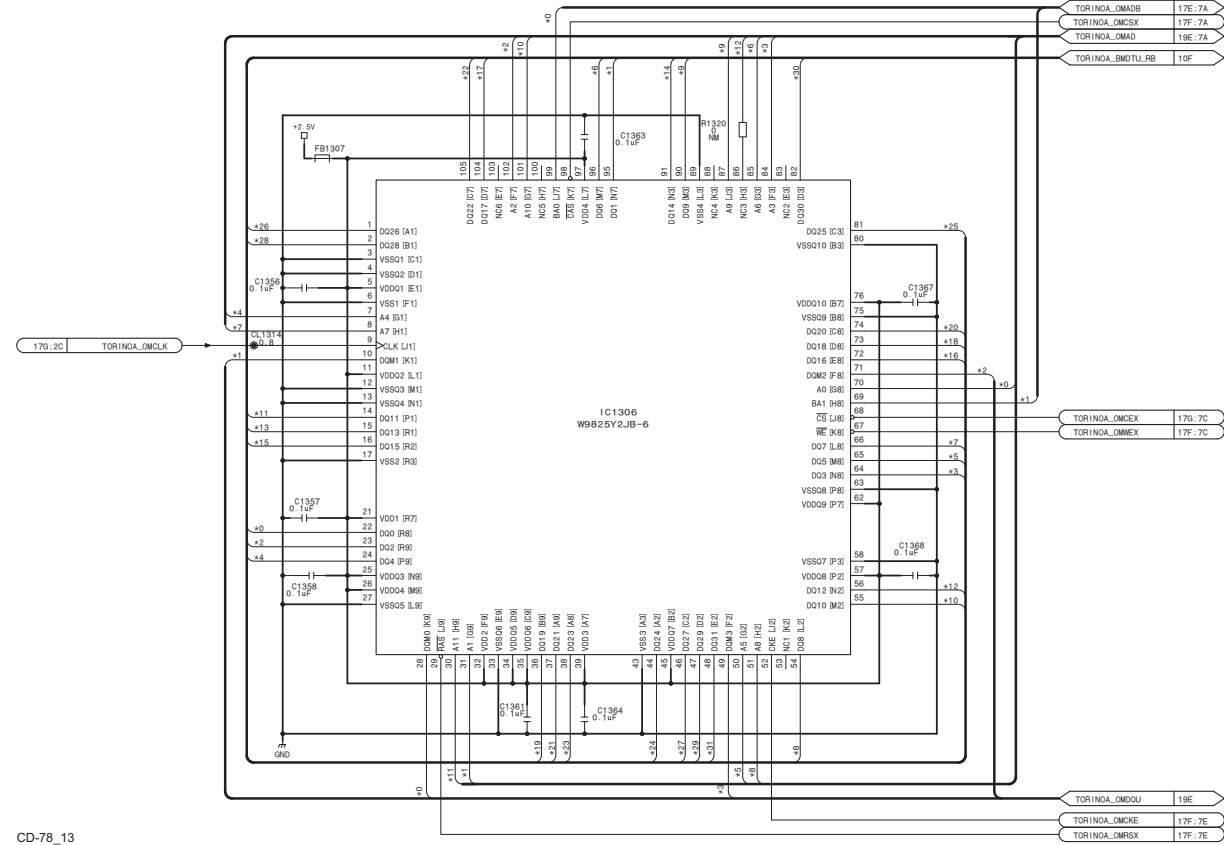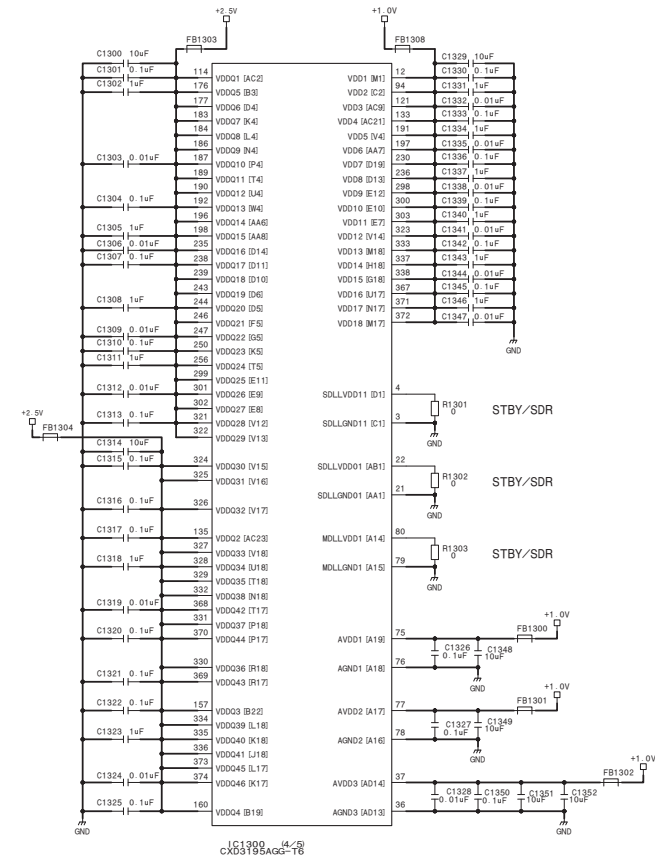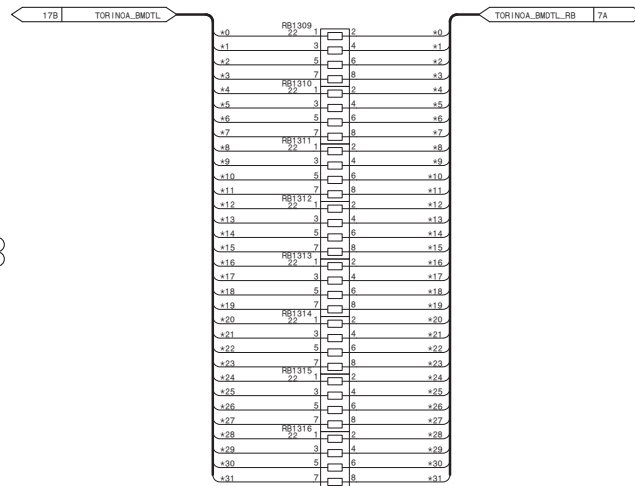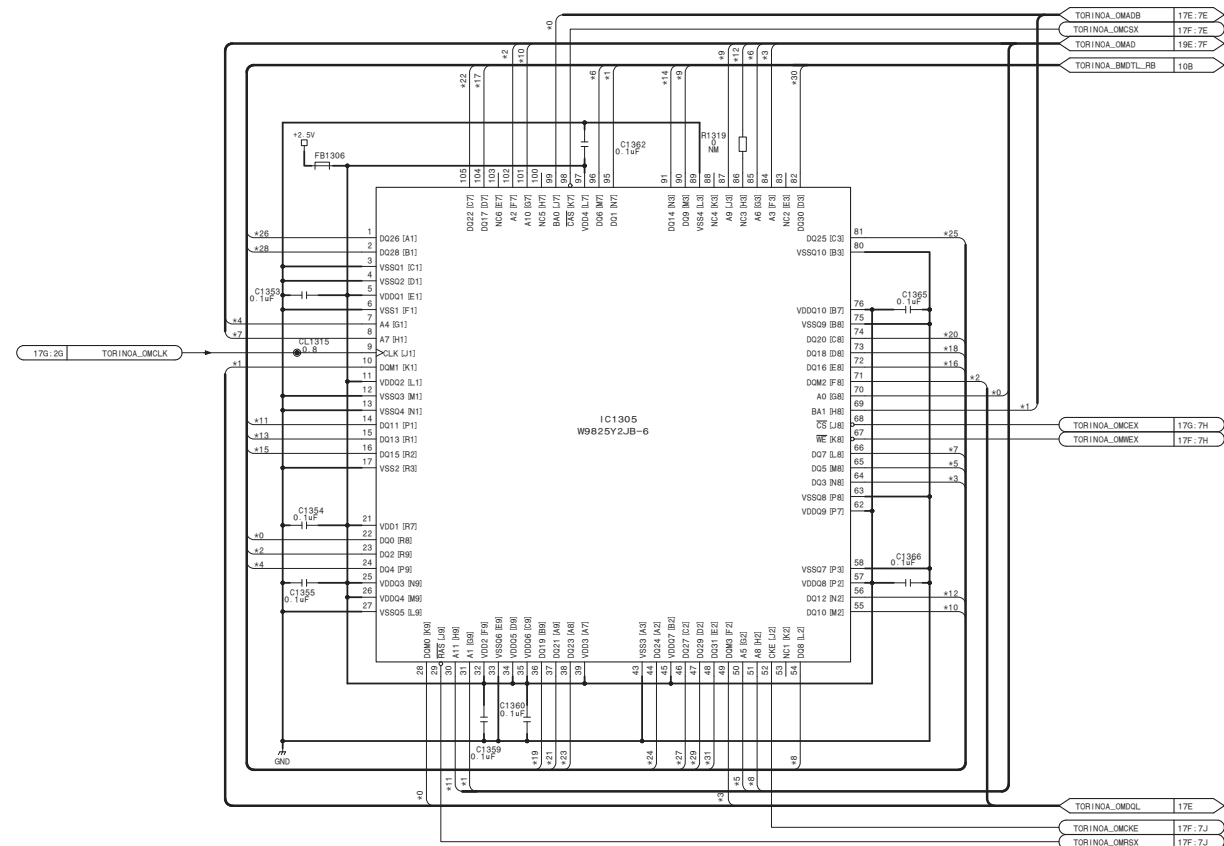


CD-78 (13/16)_R

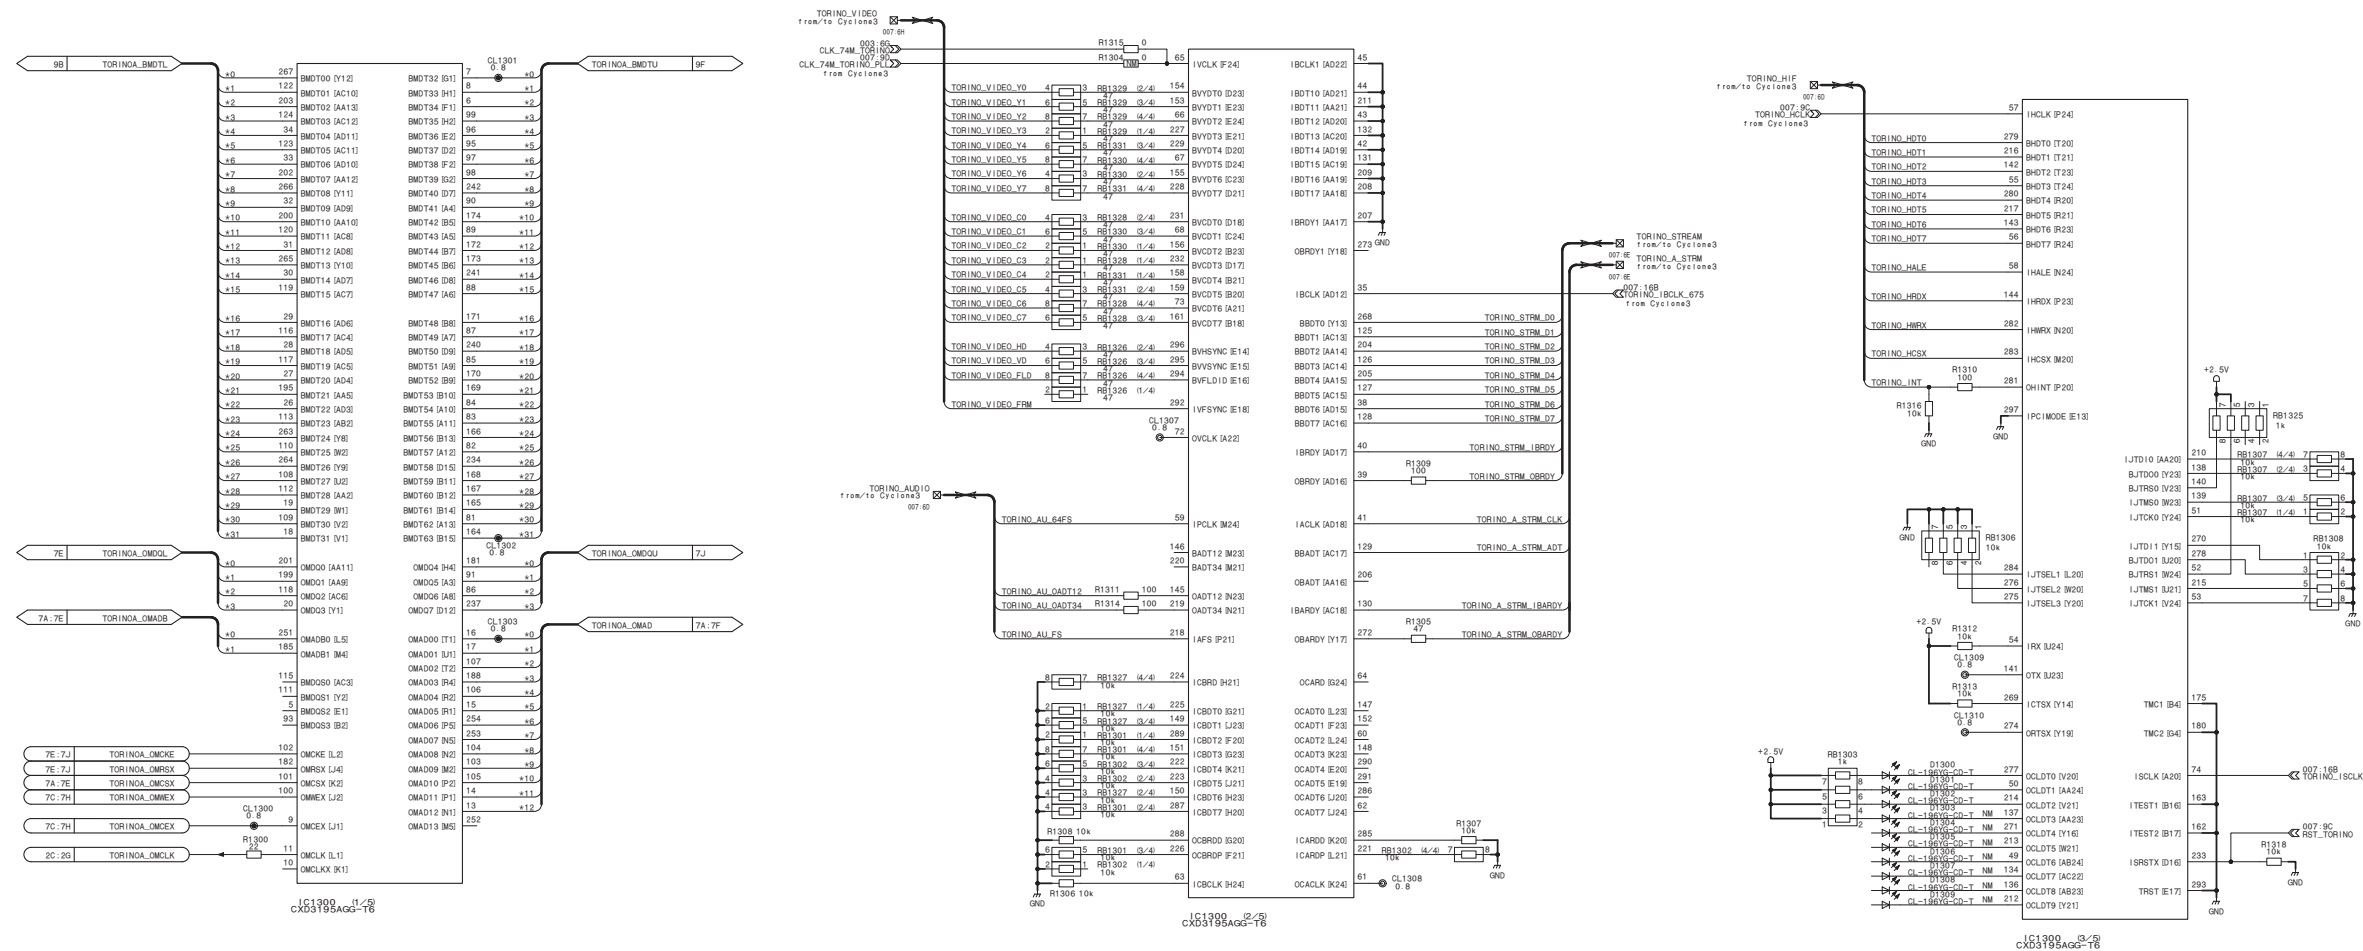

TORINO
CD-78 (13/16)
BOARD NO. 1-889-430-11
CD-78_13


CD-78 (14/16)

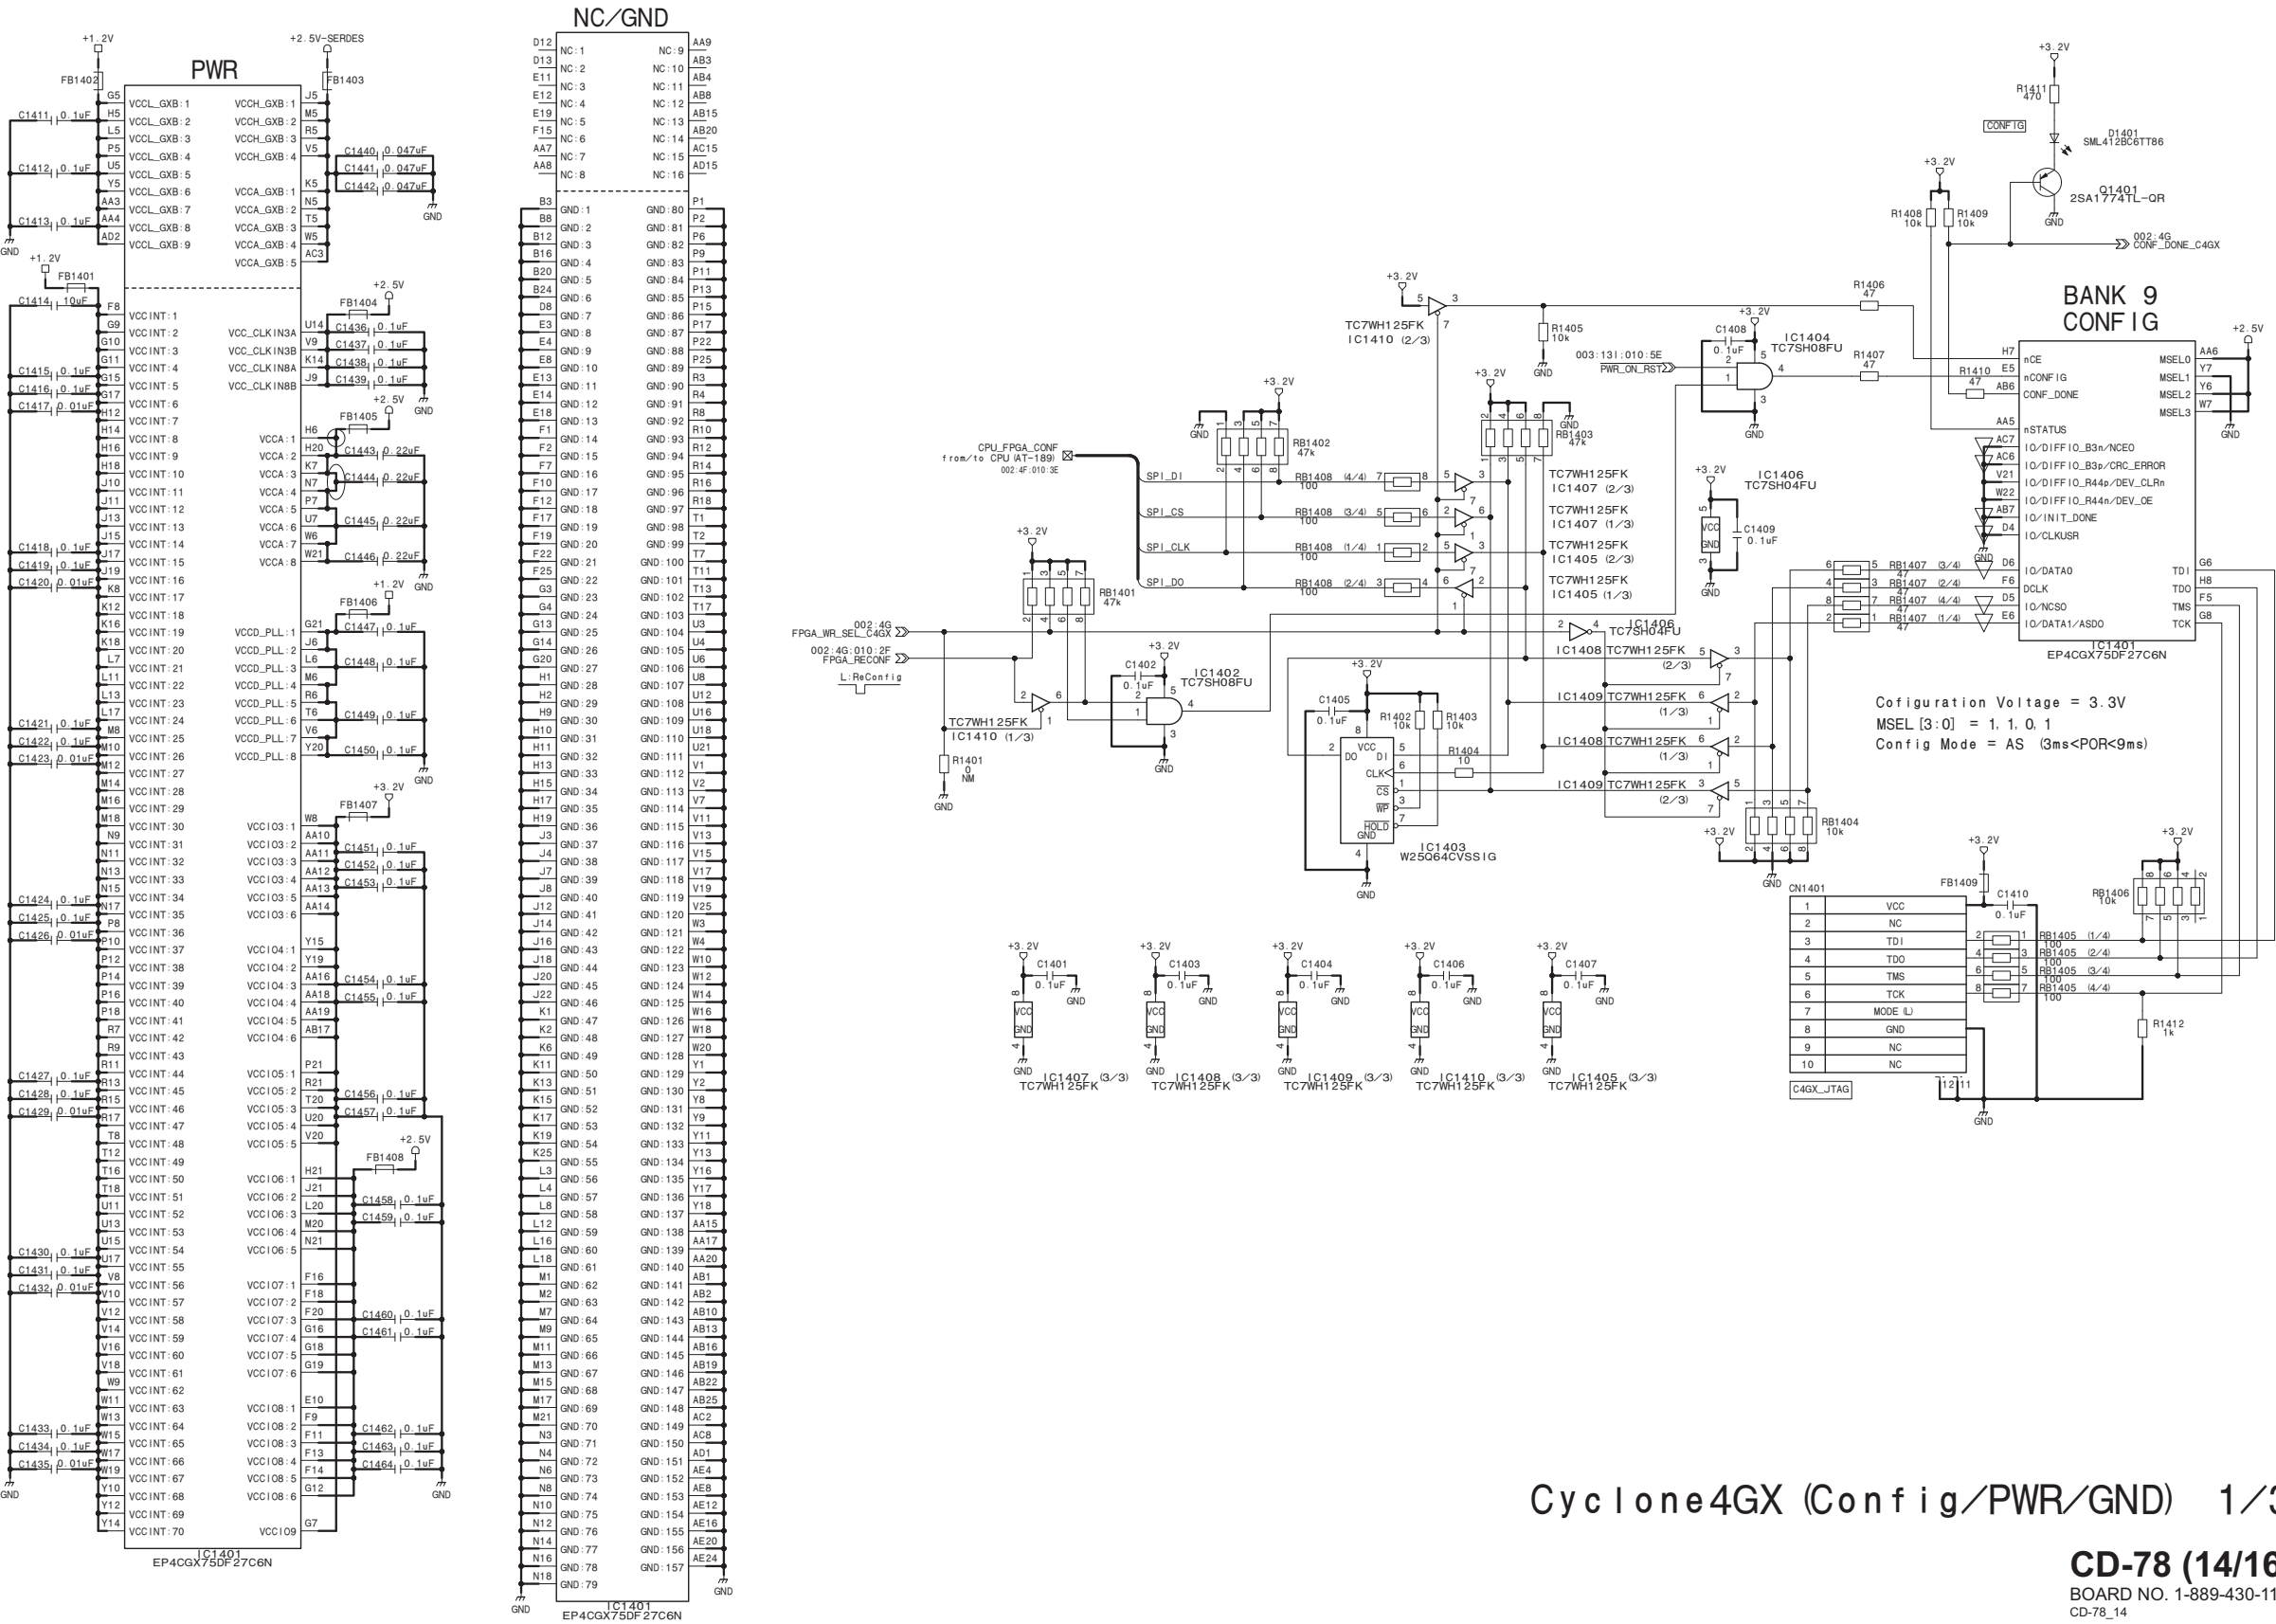


Cyclone4GX (Config/PWR/GND) 1/3

CD-78 (14/16)
BOARD NO. 1-889-430-11
CD-78_14

CD-78 (15/16)

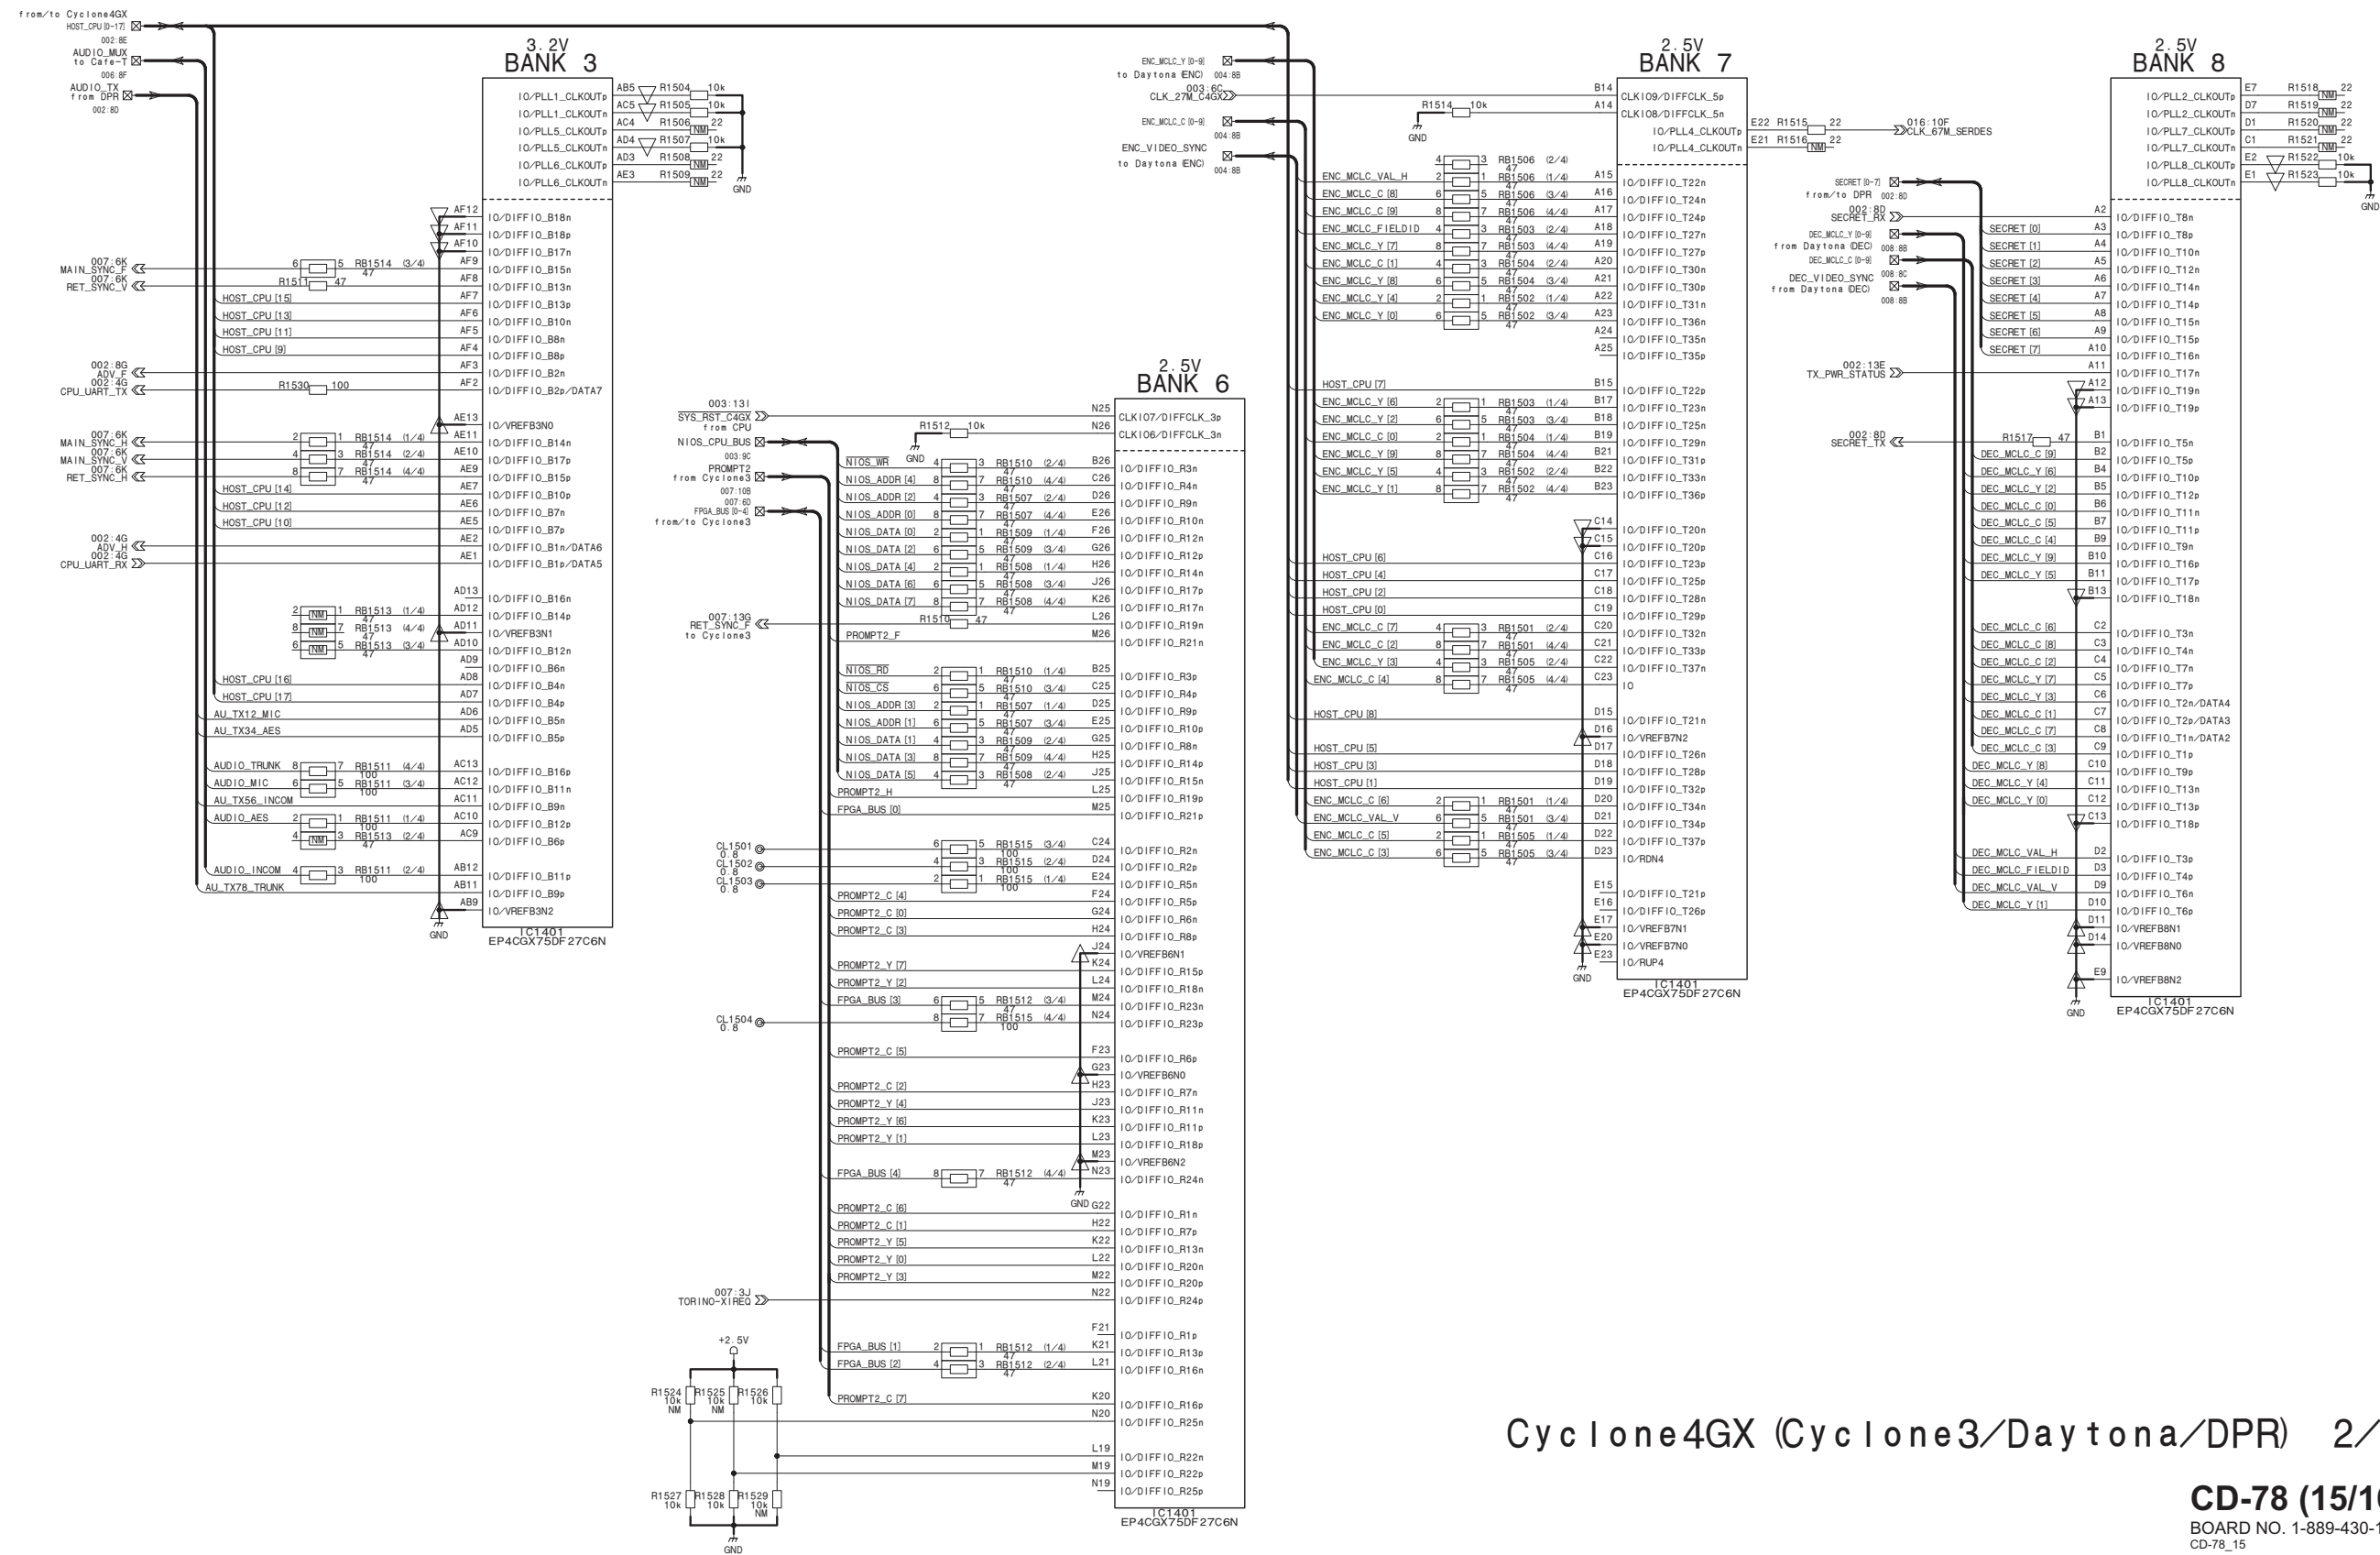


CD-78 (16/16)

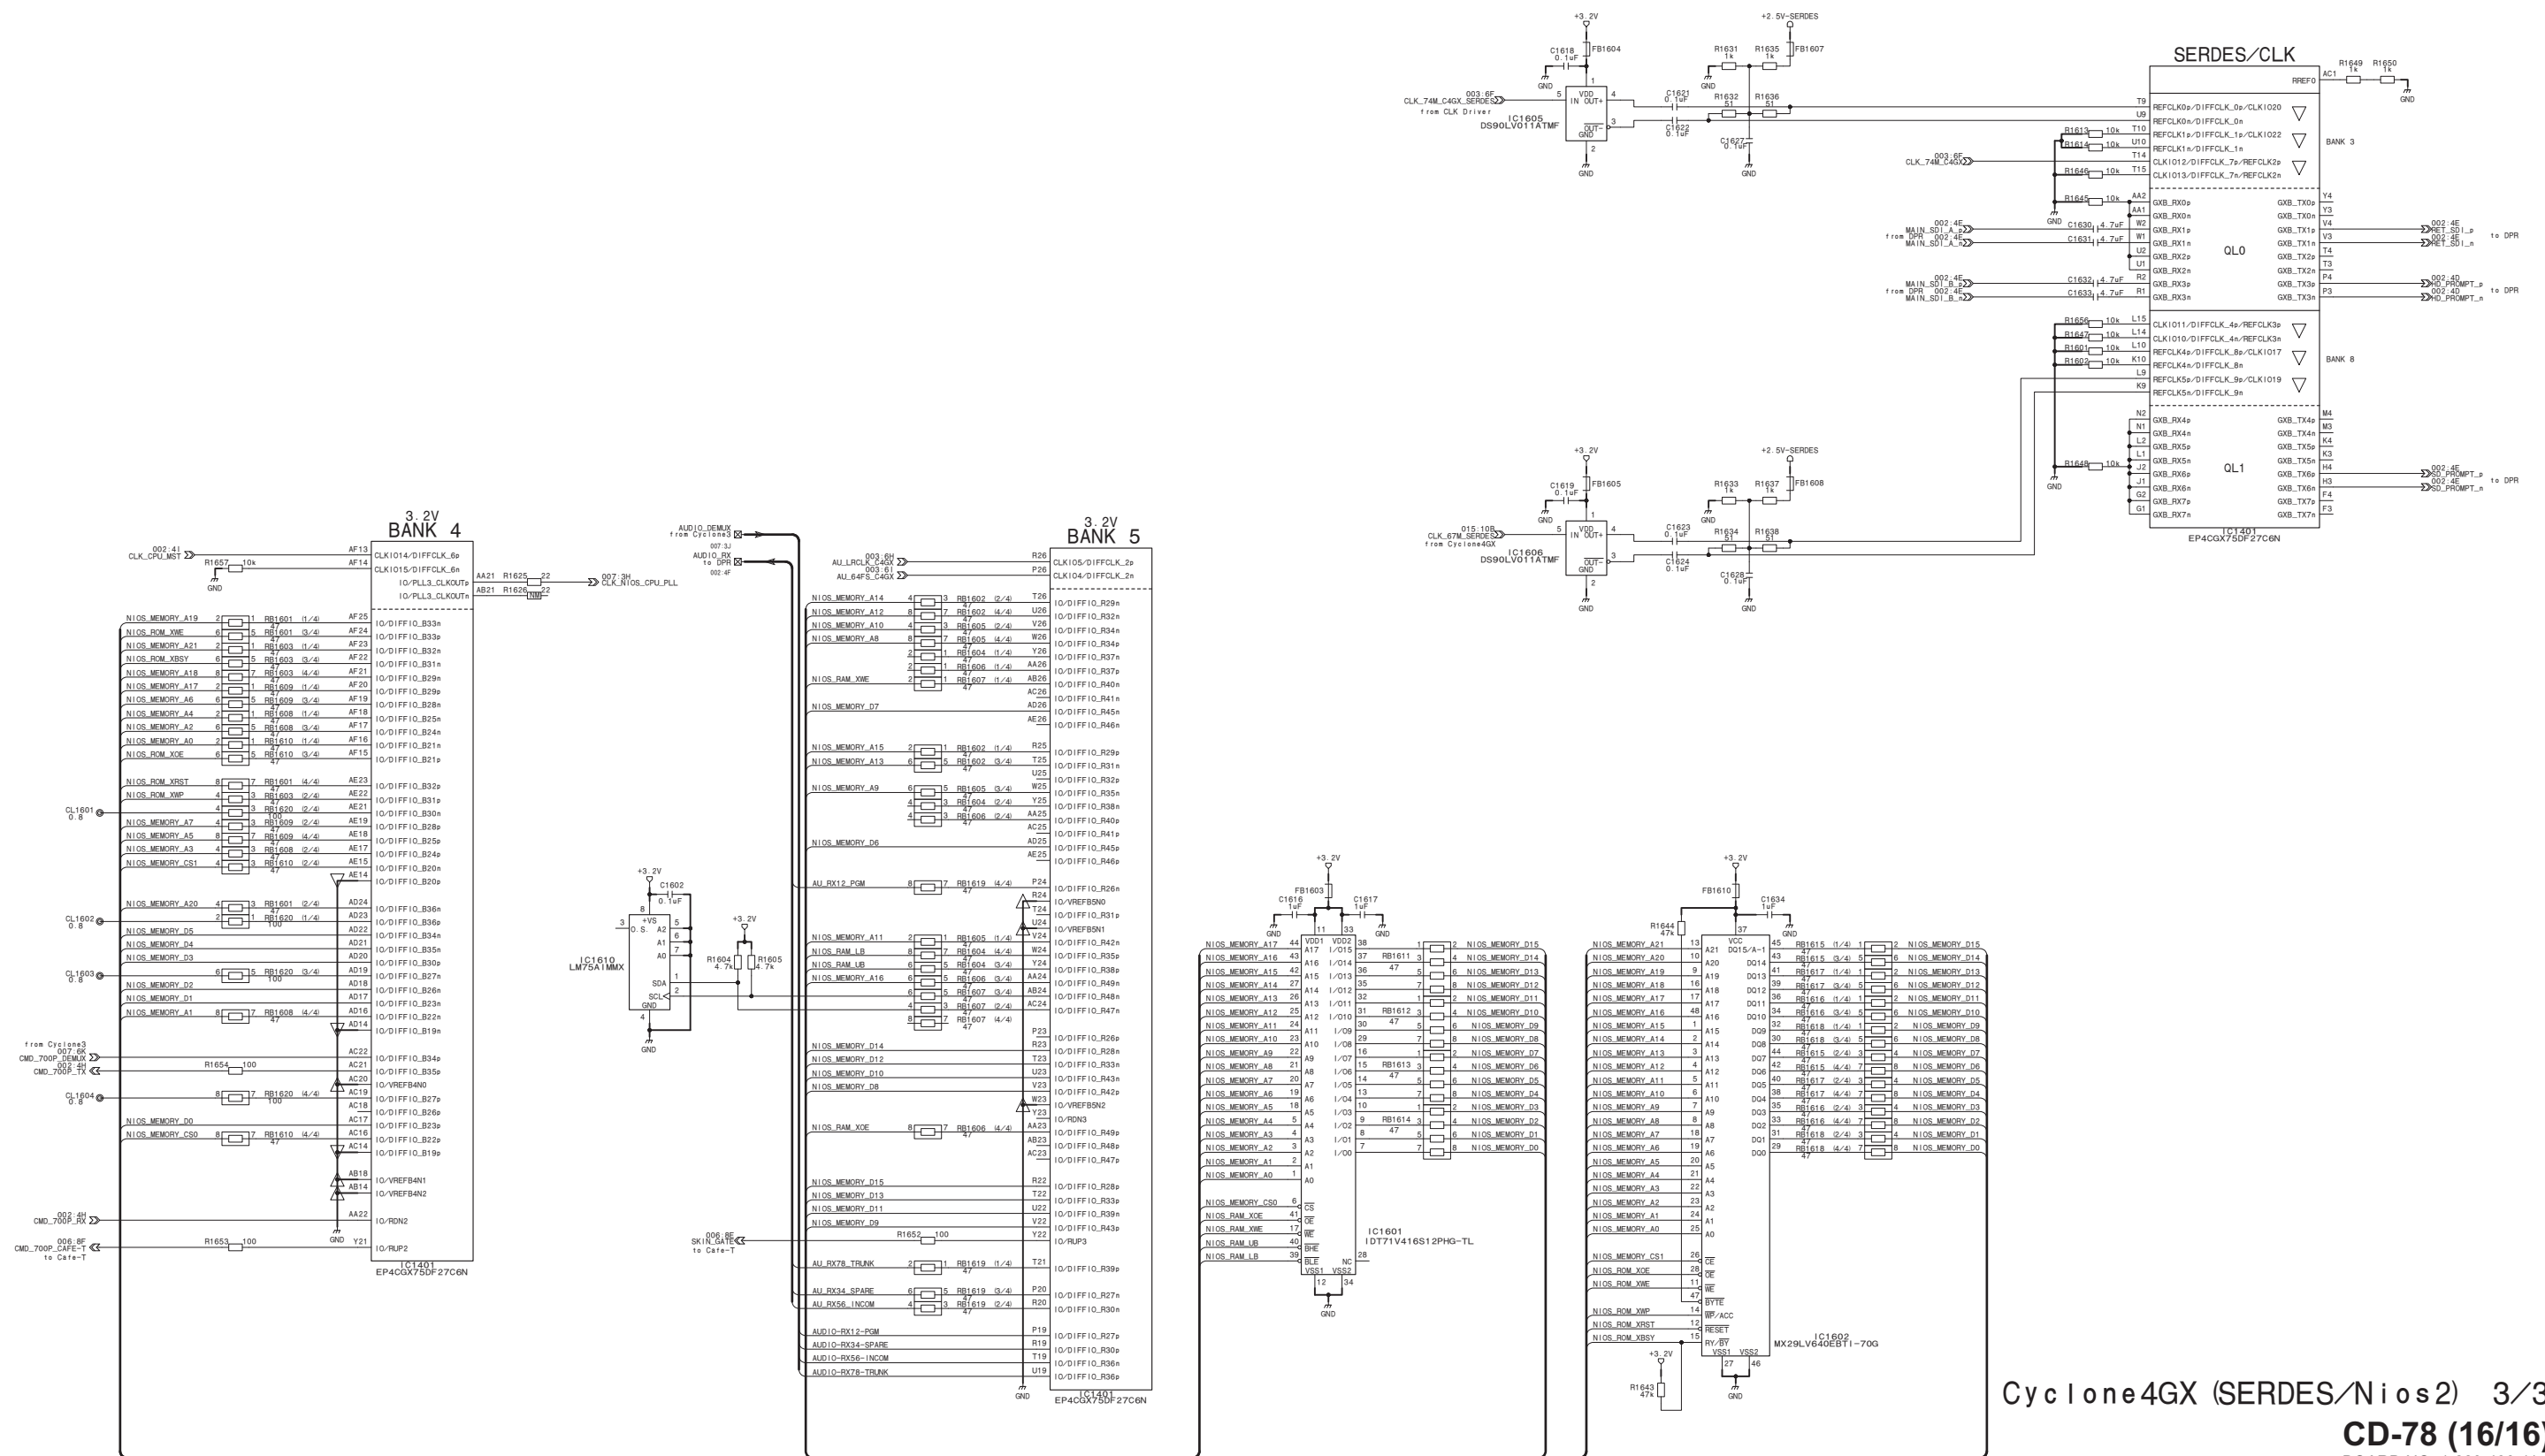


Cyclone4GX (SERDES/Nios2) 3/3
CD-78 (16/16)
BOARD NO. 1-889-430-11
CD-78_16

CN-3637

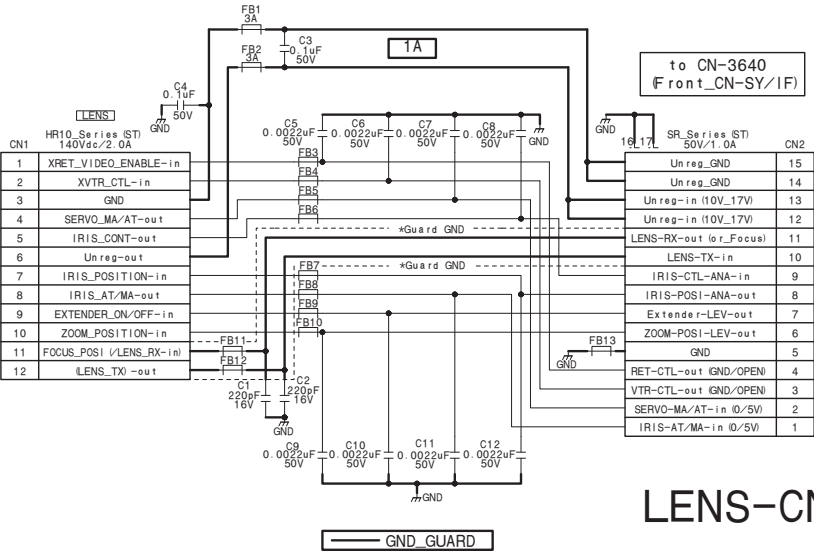


CN-3637
BOARD NO. 1-889-436-11
CN-3637_1

CN-3639

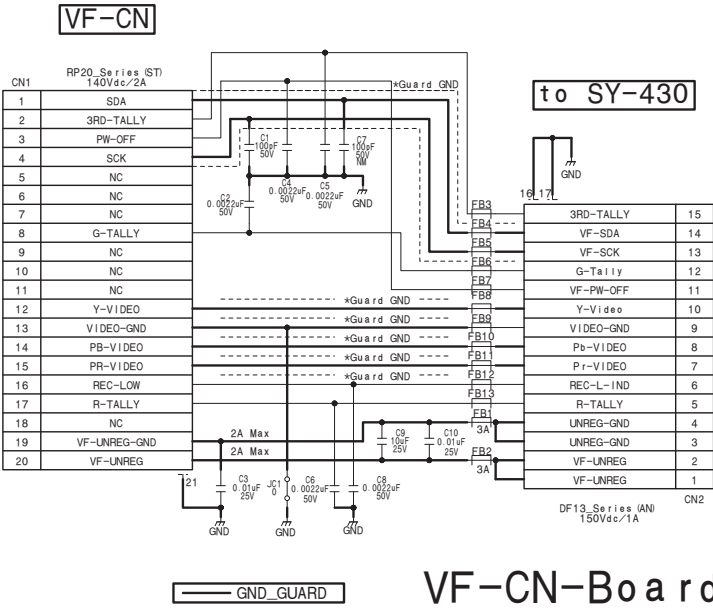


CN-3639
BOARD NO. 1-889-439-11
CN-3639_1

CN-3638

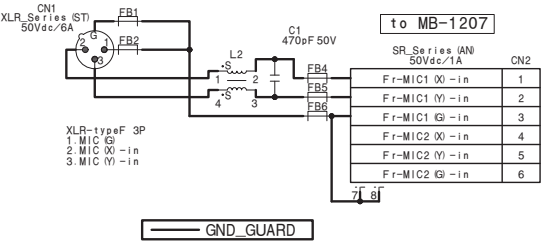

CN-3638
BOARD NO. 1-889-438-11
CN-3638_1


CN-3640

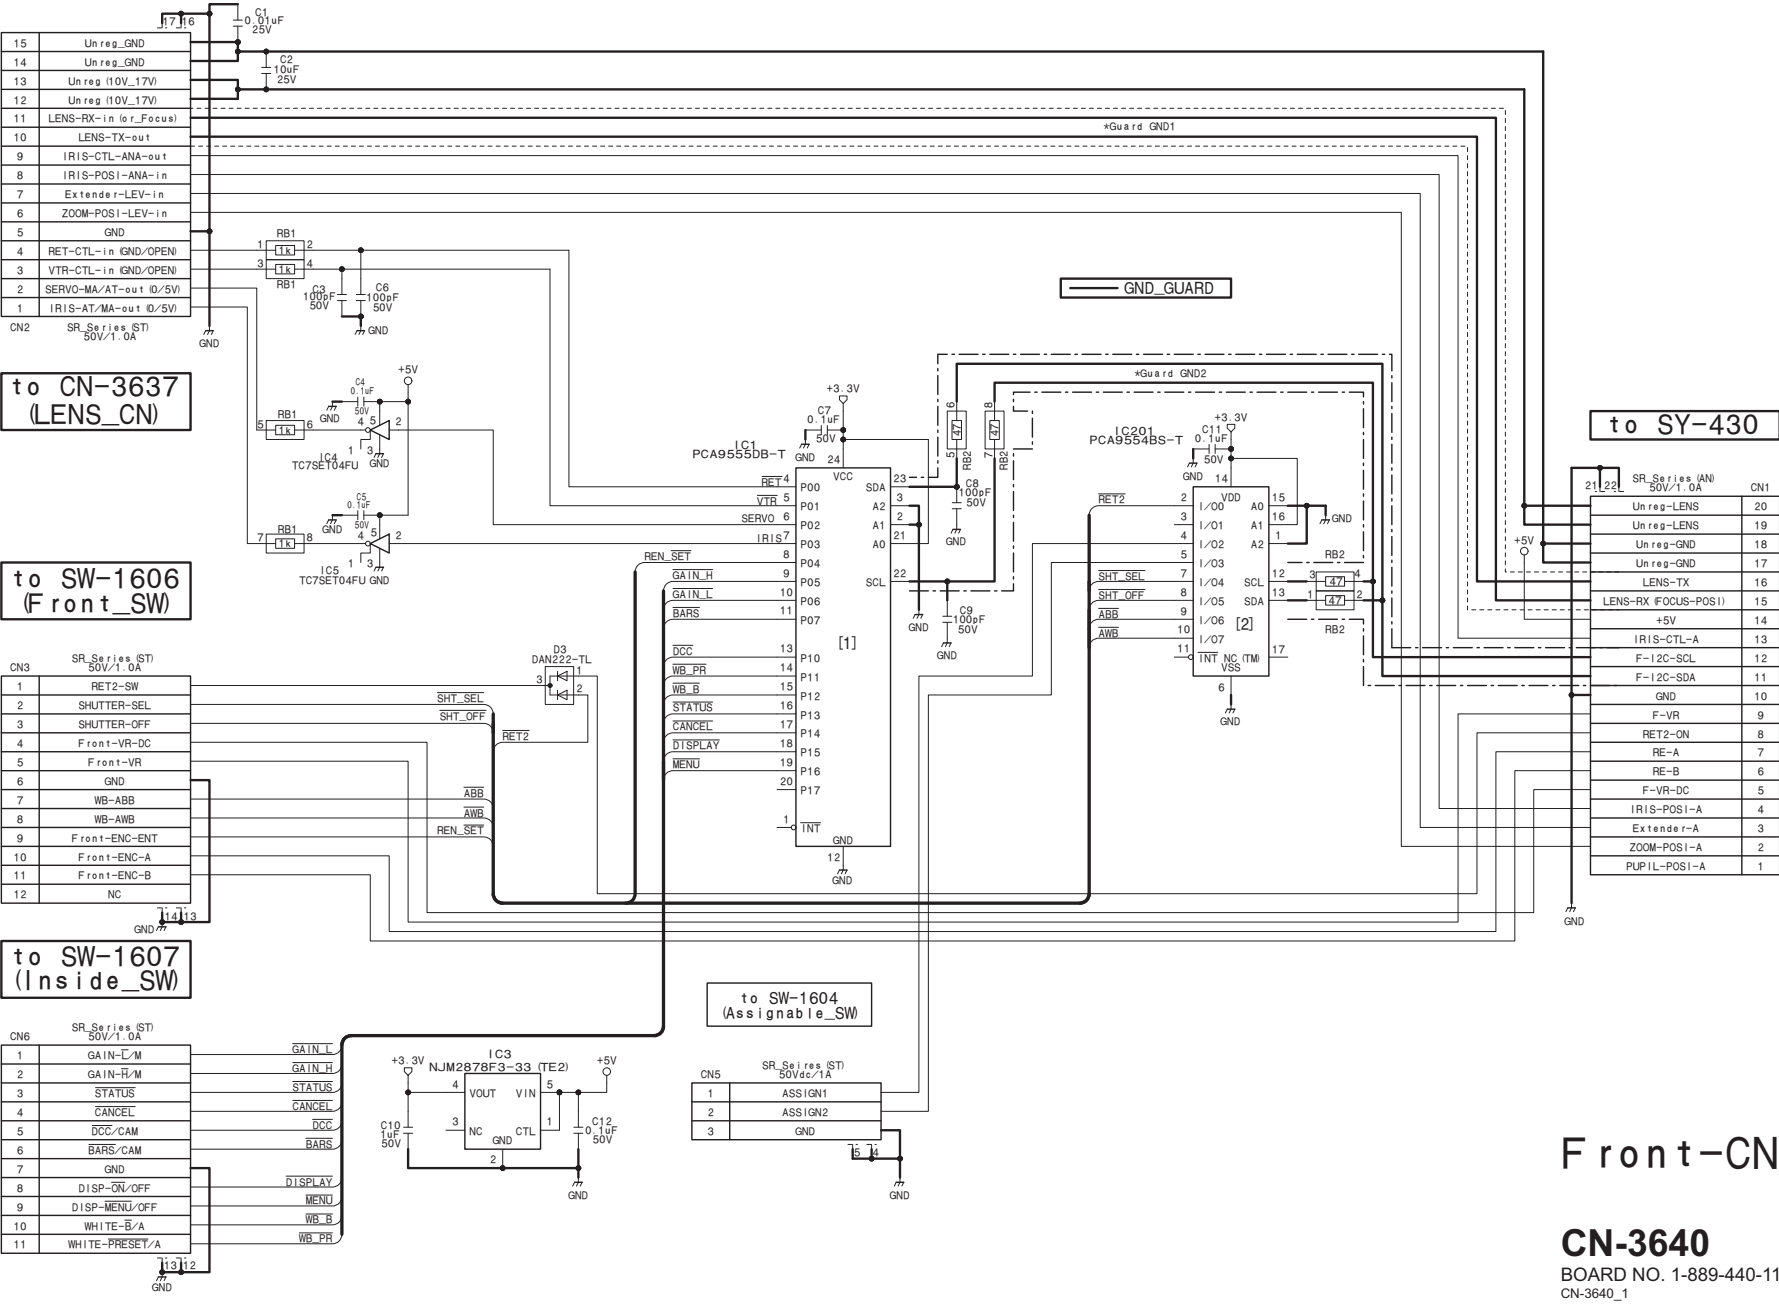

Front-CN

CN-3640
BOARD NO. 1-889-440-11
CN-3640_1

CN-3641

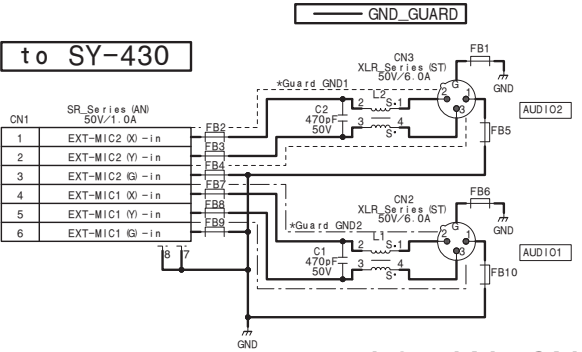


AUDIO_IN_CN

CN-3641

BOARD NO. 1-889-431-11
CN-3641_1

CN-3642

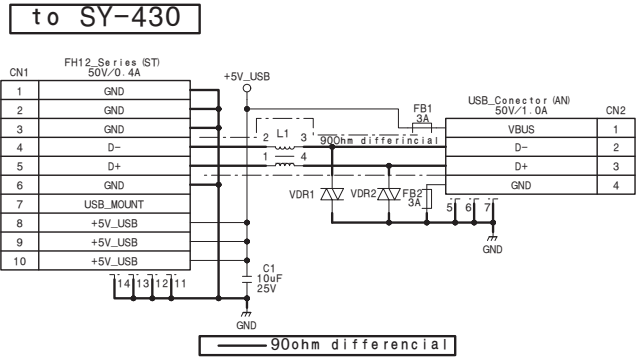


USB_CN


CN-3642

BOARD NO. 1-889-432-11
CN-3642_1

CN-3643
CN-3643 (1/2)

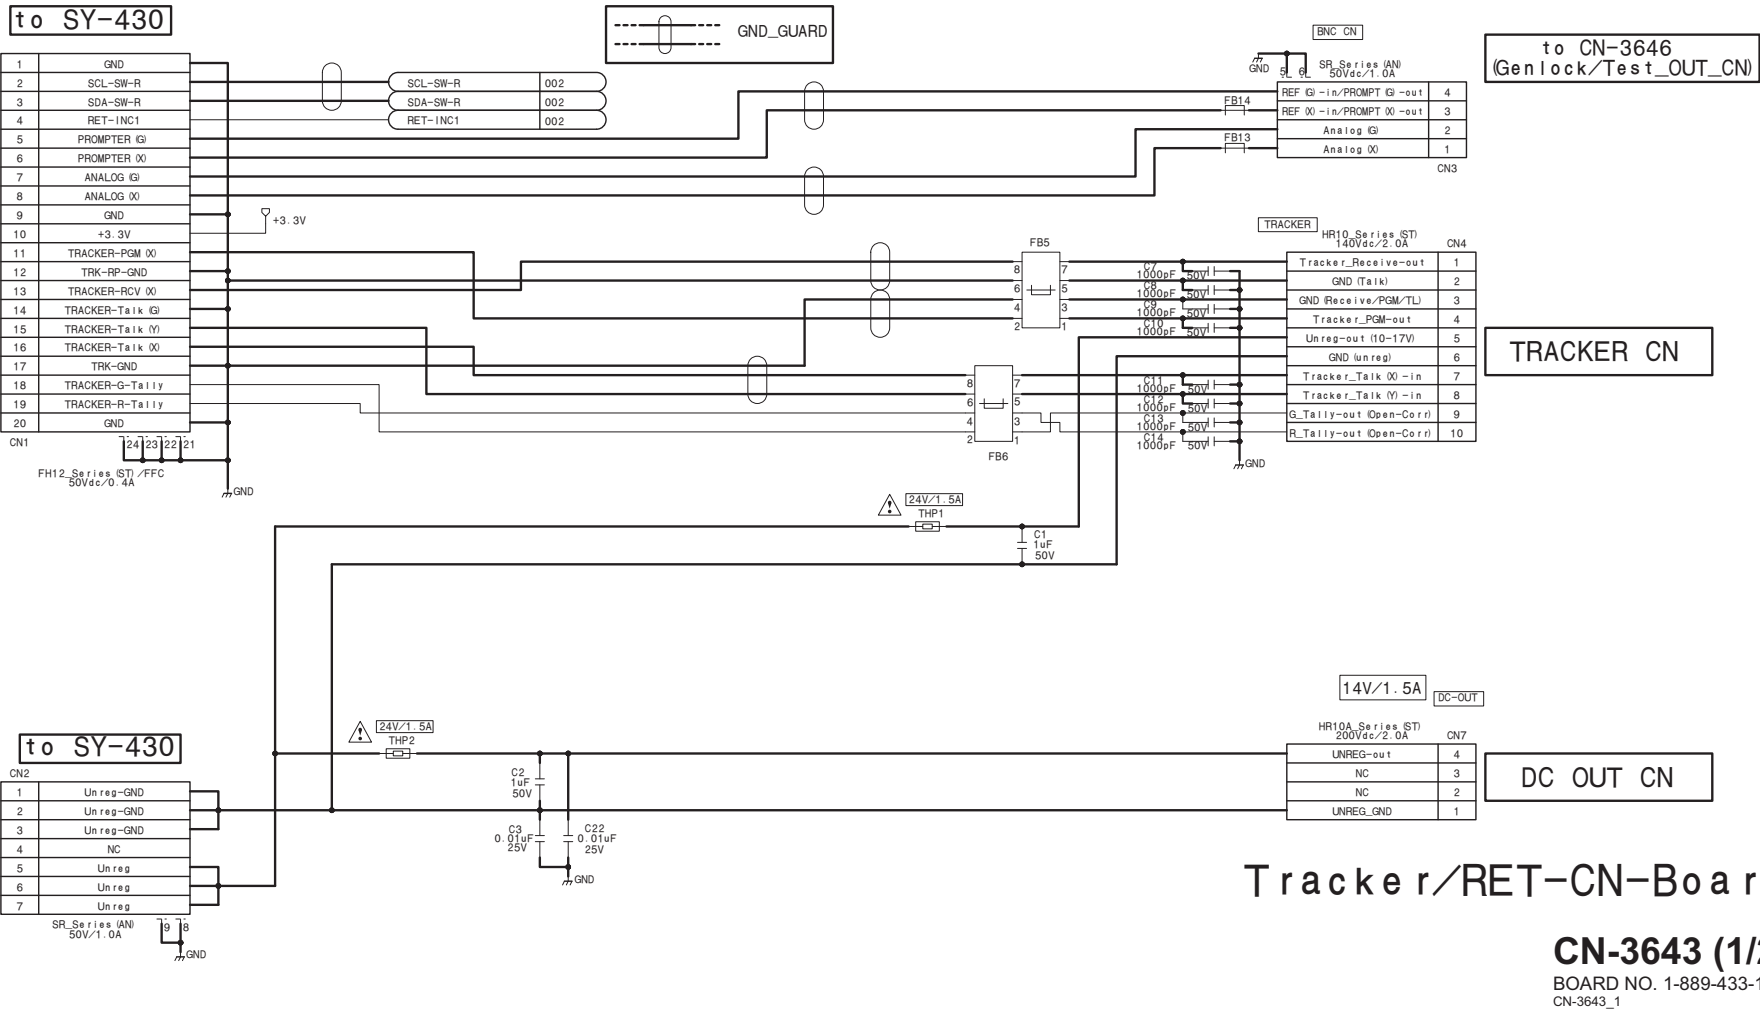


CN-3643 (2/2)

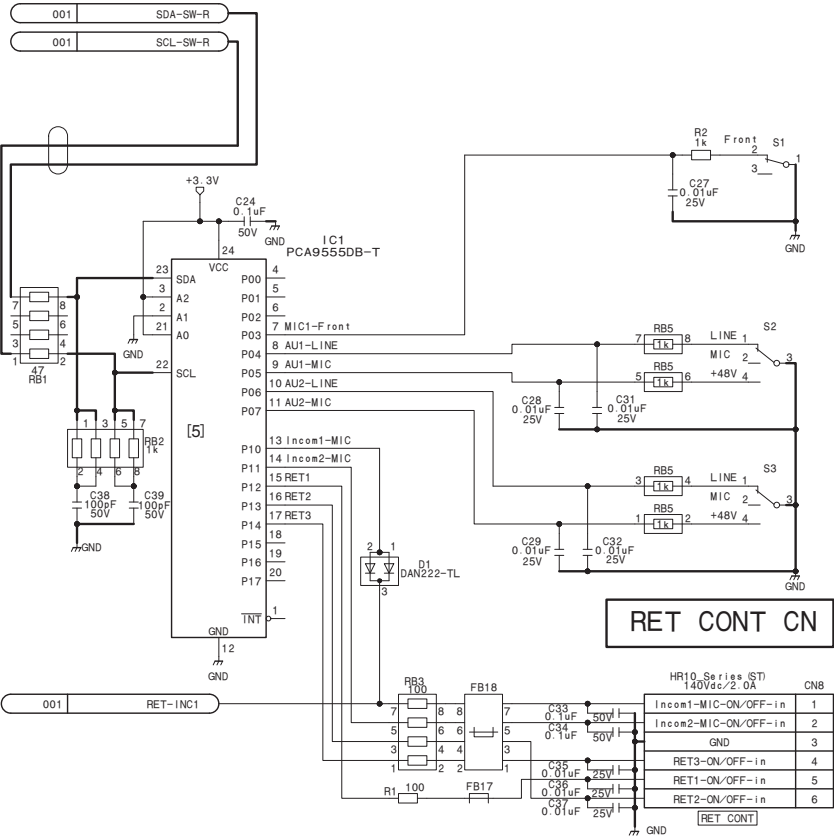


CN-3643 (2/2)
BOARD NO. 1-889-433-11
CN-3643_2

CN-3644

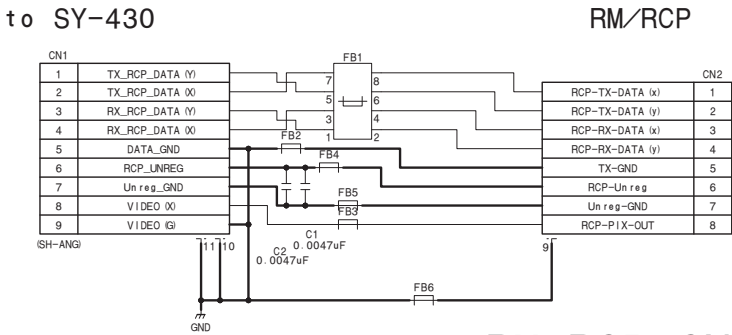


RM/RCP-CN
CN-3644
BOARD NO. 1-889-434-11
CN-3644_1

CN-3645

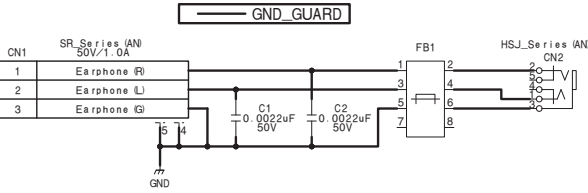


Earphone
CN-3645
BOARD NO. 1-889-435-11
CN-3645_1

CN-3646

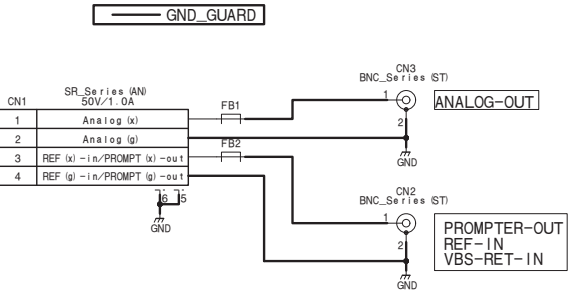

BNC-CN
CN-3646
BOARD NO. 1-888-848-11
CN-3646_1

CN-3647

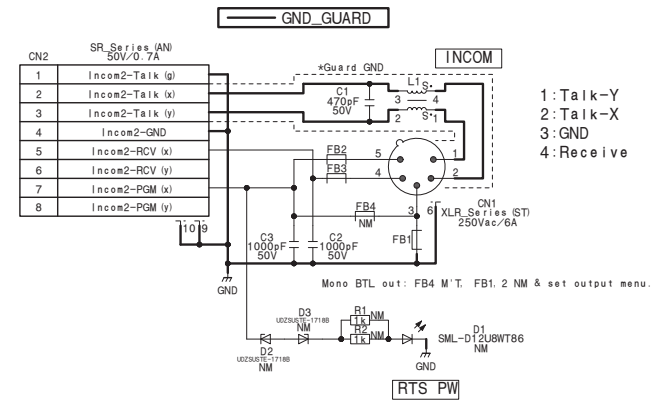


Incom Connector

CN-3647

BOARD NO. 1-888-849-11
CN-3647_1

CN-3648

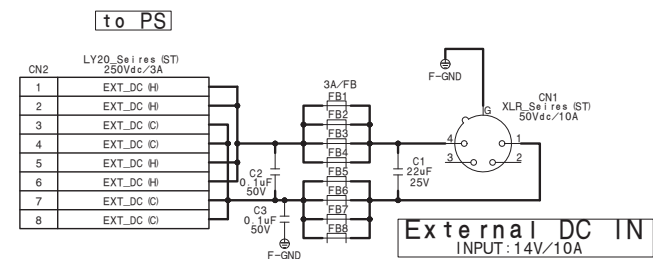


DC IN

CN-3648

BOARD NO. 1-888-850-11
CN-3648_1

CN-3653

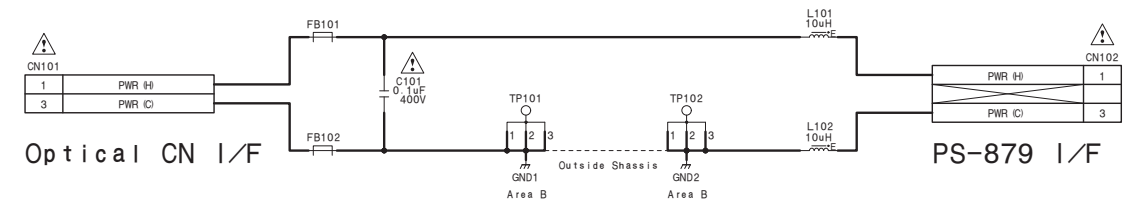

Optical CN 1/F

SDI-117 I/F









CN (Fiber Model)


CN-3653

BOARD NO. 1-889-427-11
CN-3653_1

DPR-358
DPR-358 (1/9)

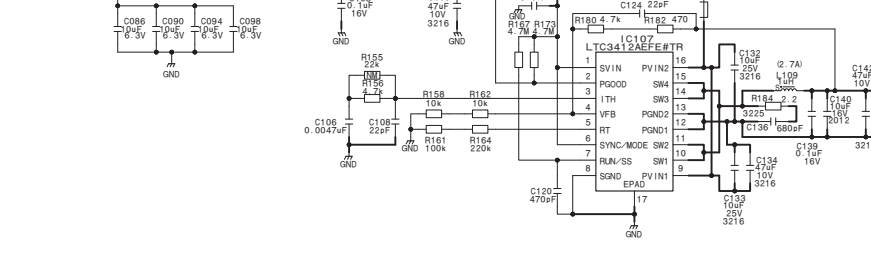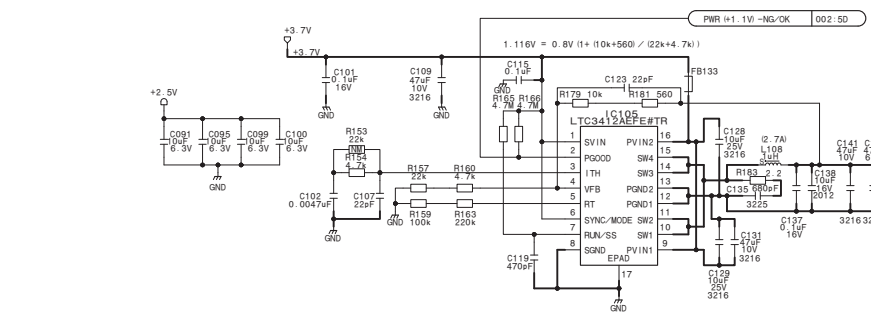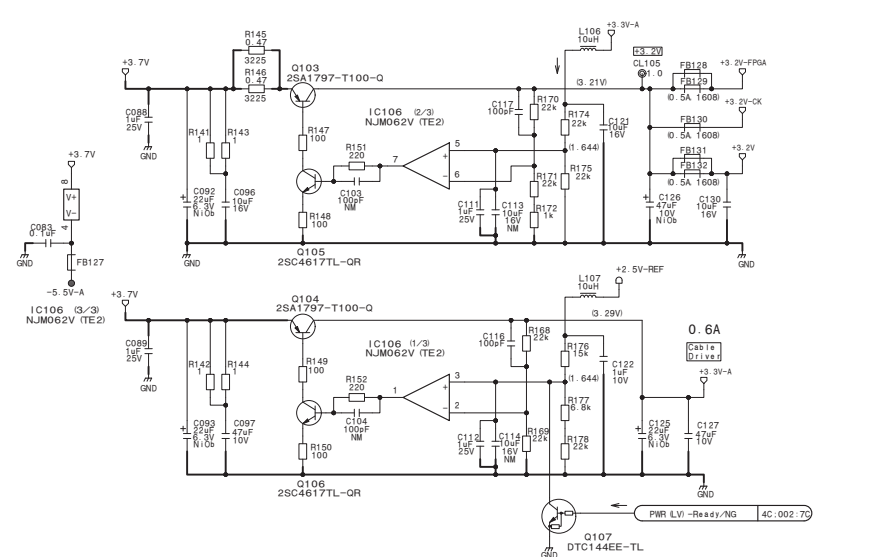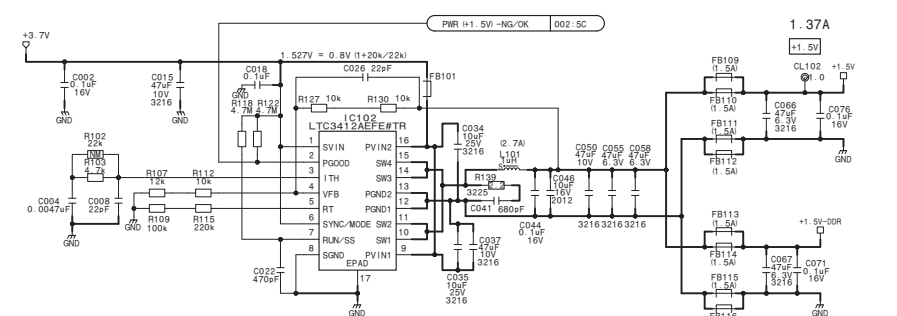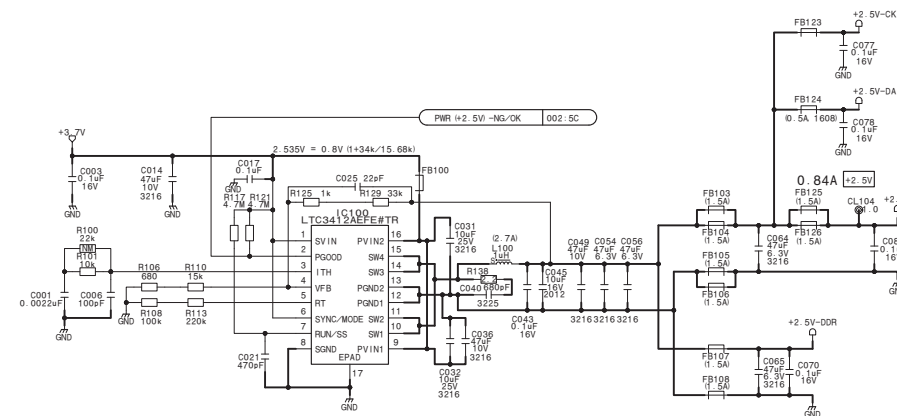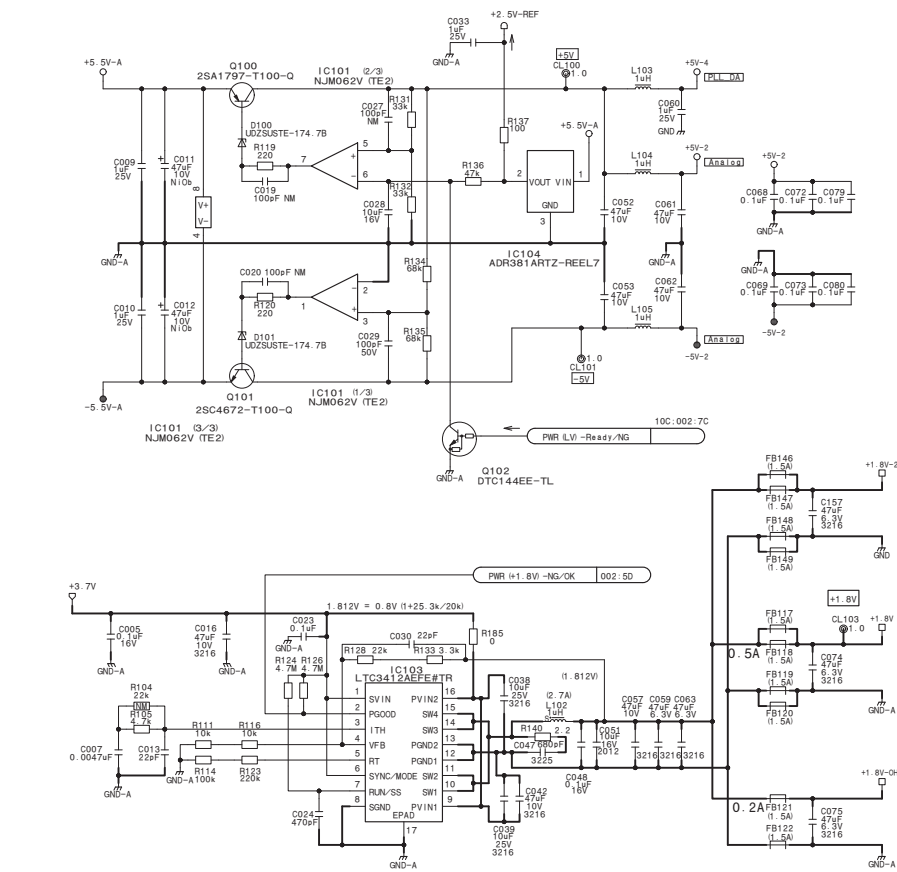


```
use ALMA-Core&PLL
```







DPR-358 (1/9)
BOARD NO. 1-889-425-12
DPR-358_1

DPR-358 (2/9)_L


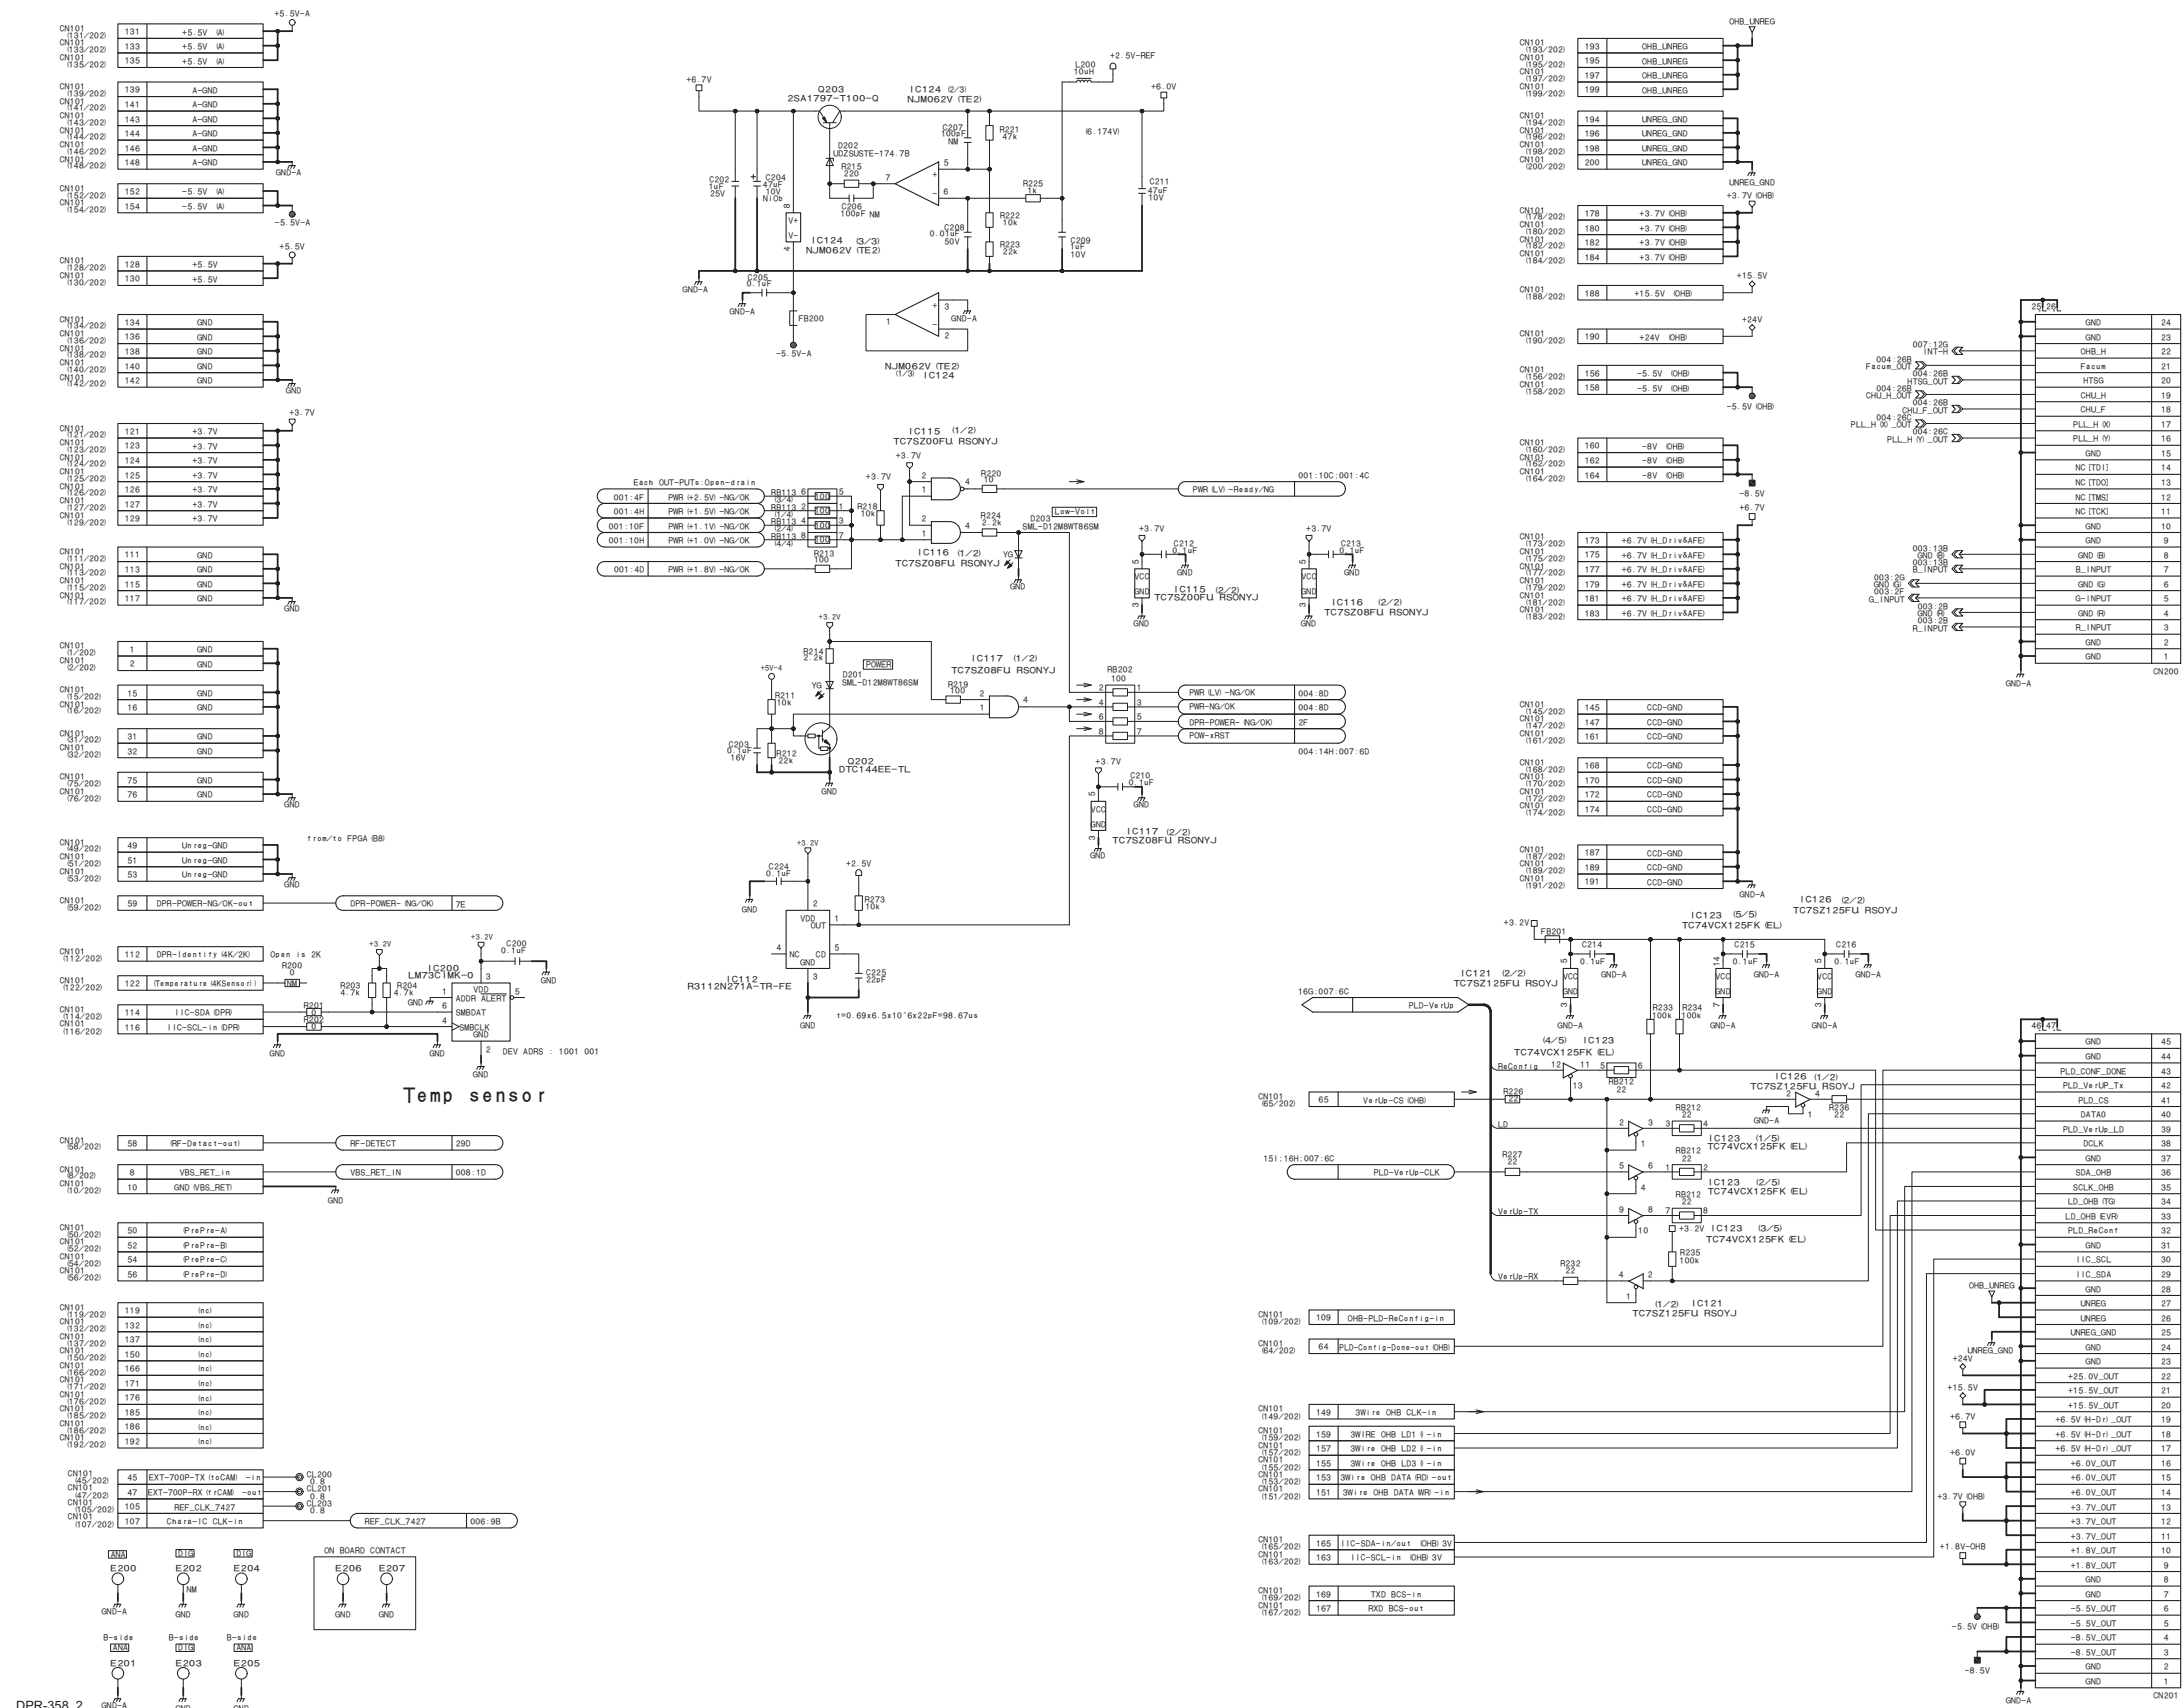


DPR-358 (2/9)_R

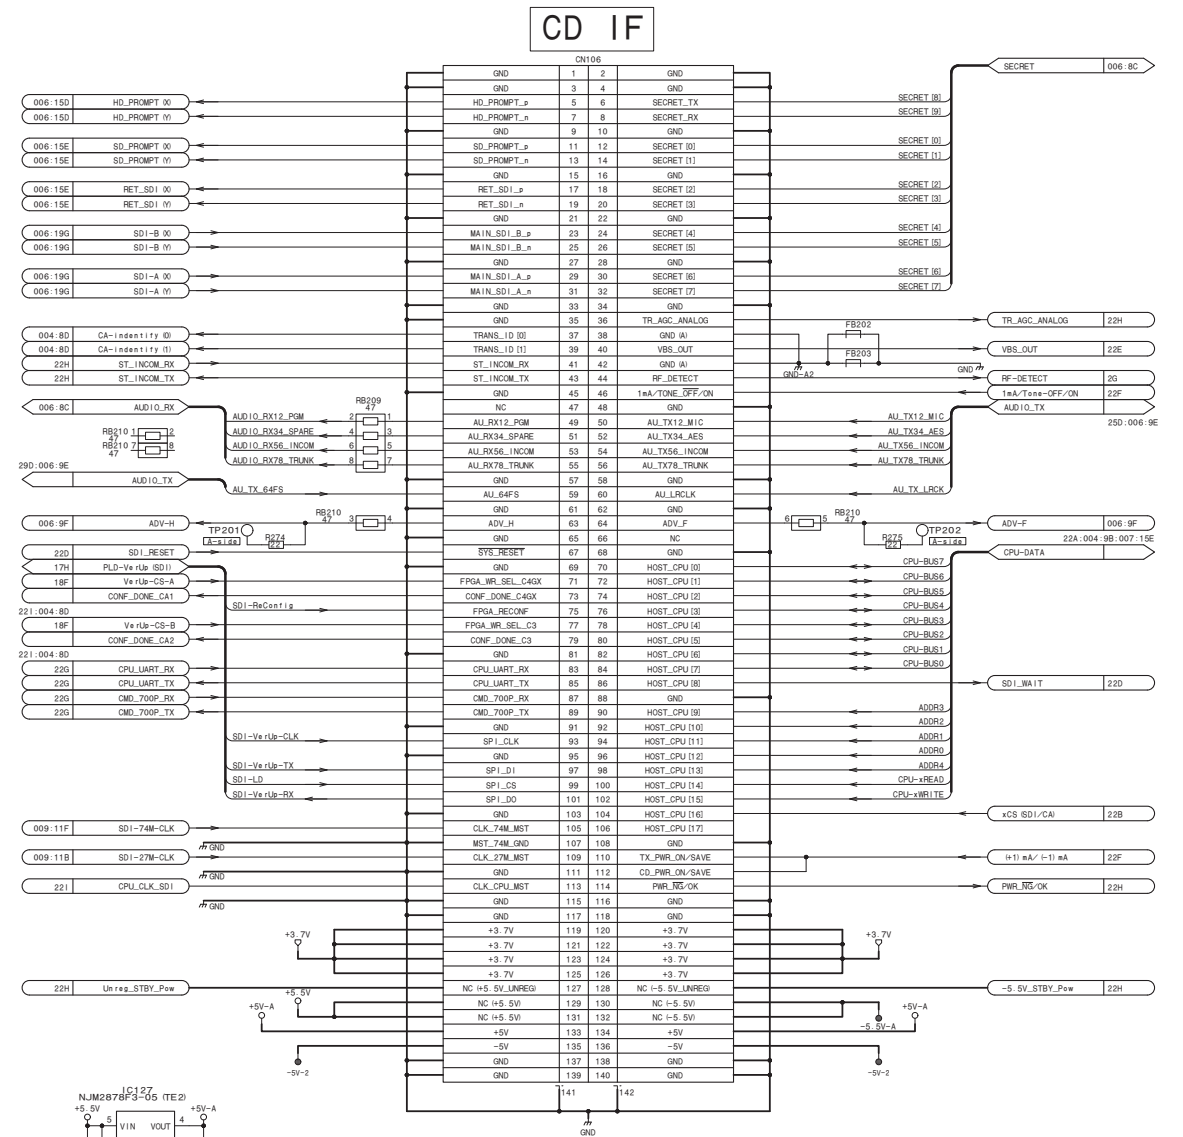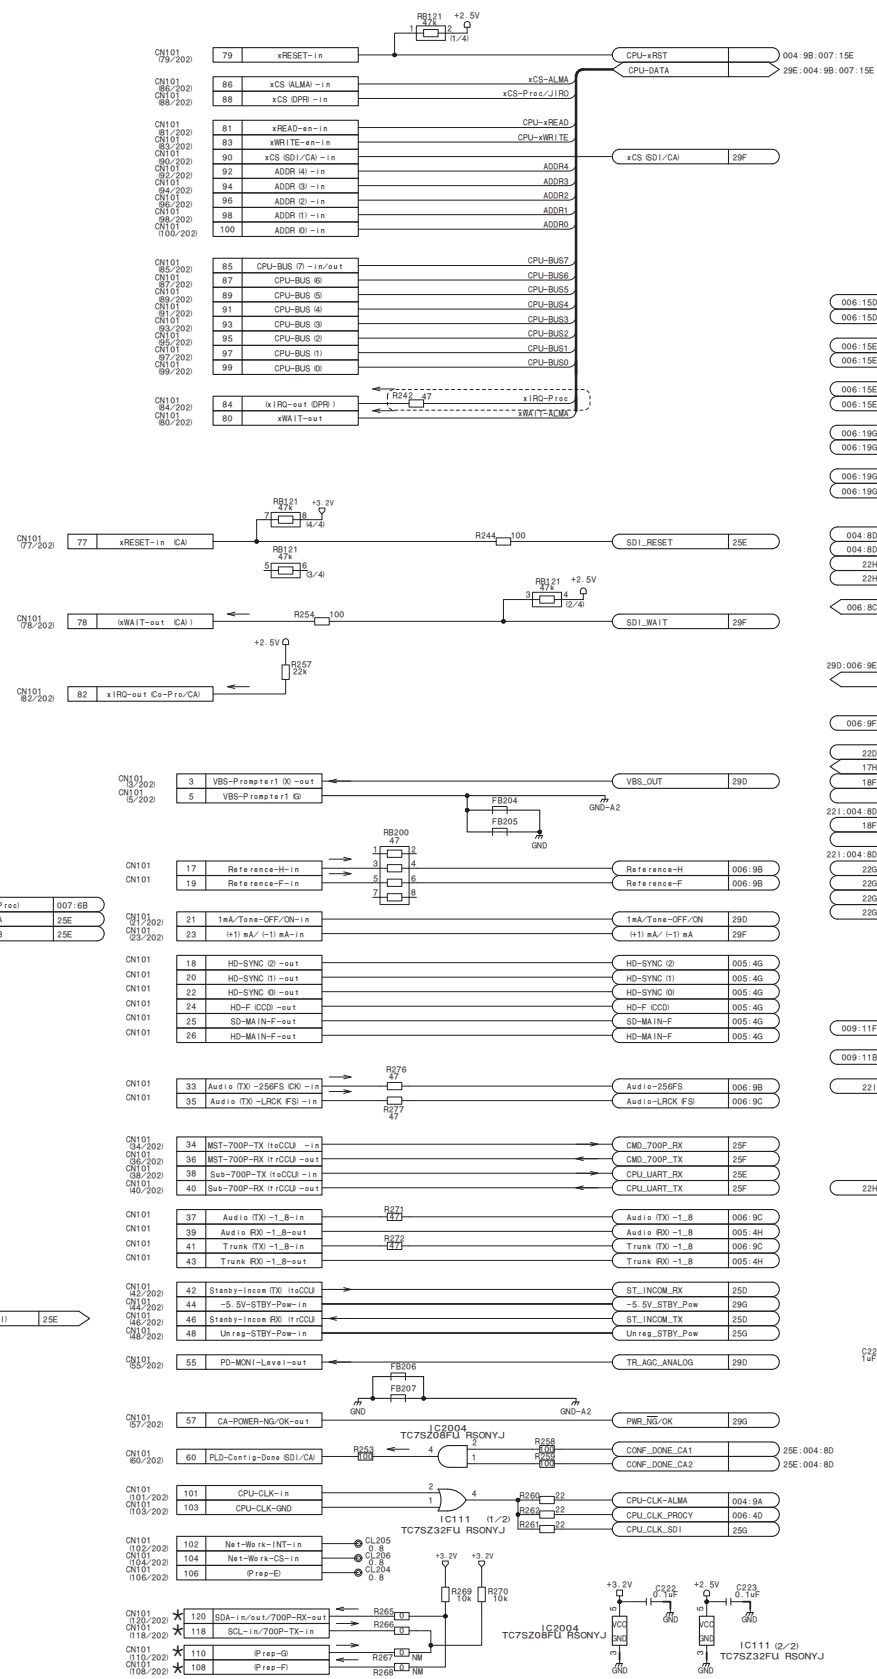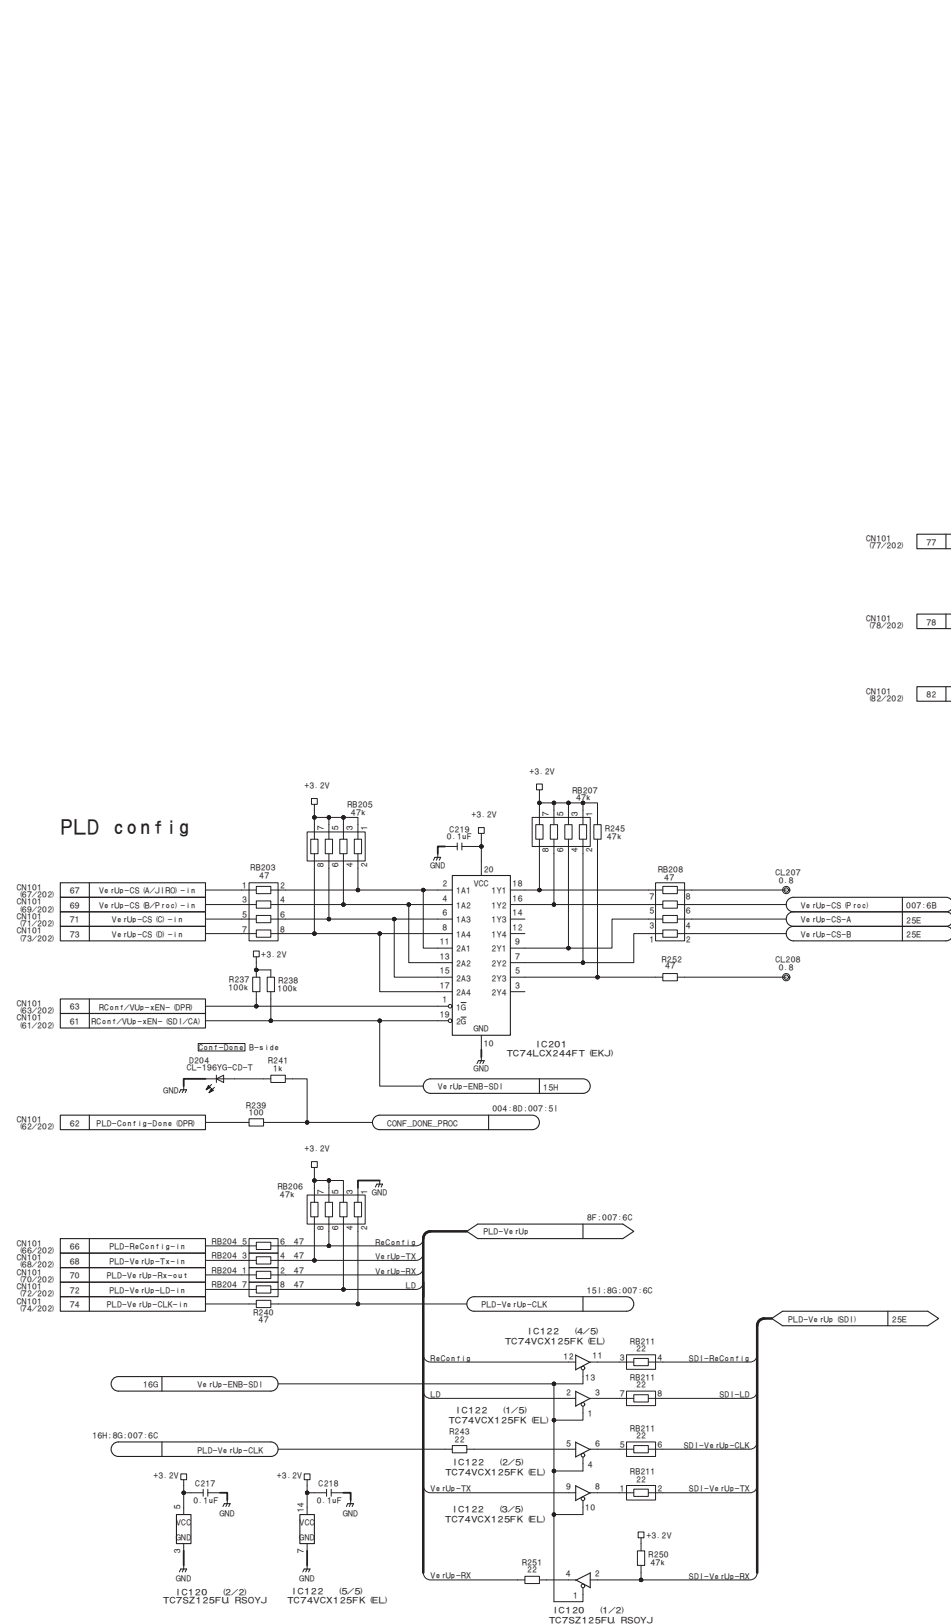



DPR-358 (2/9)
BOARD NO. 1-889-425-12
DPR-358 2

DPR-358 (3/9)_L

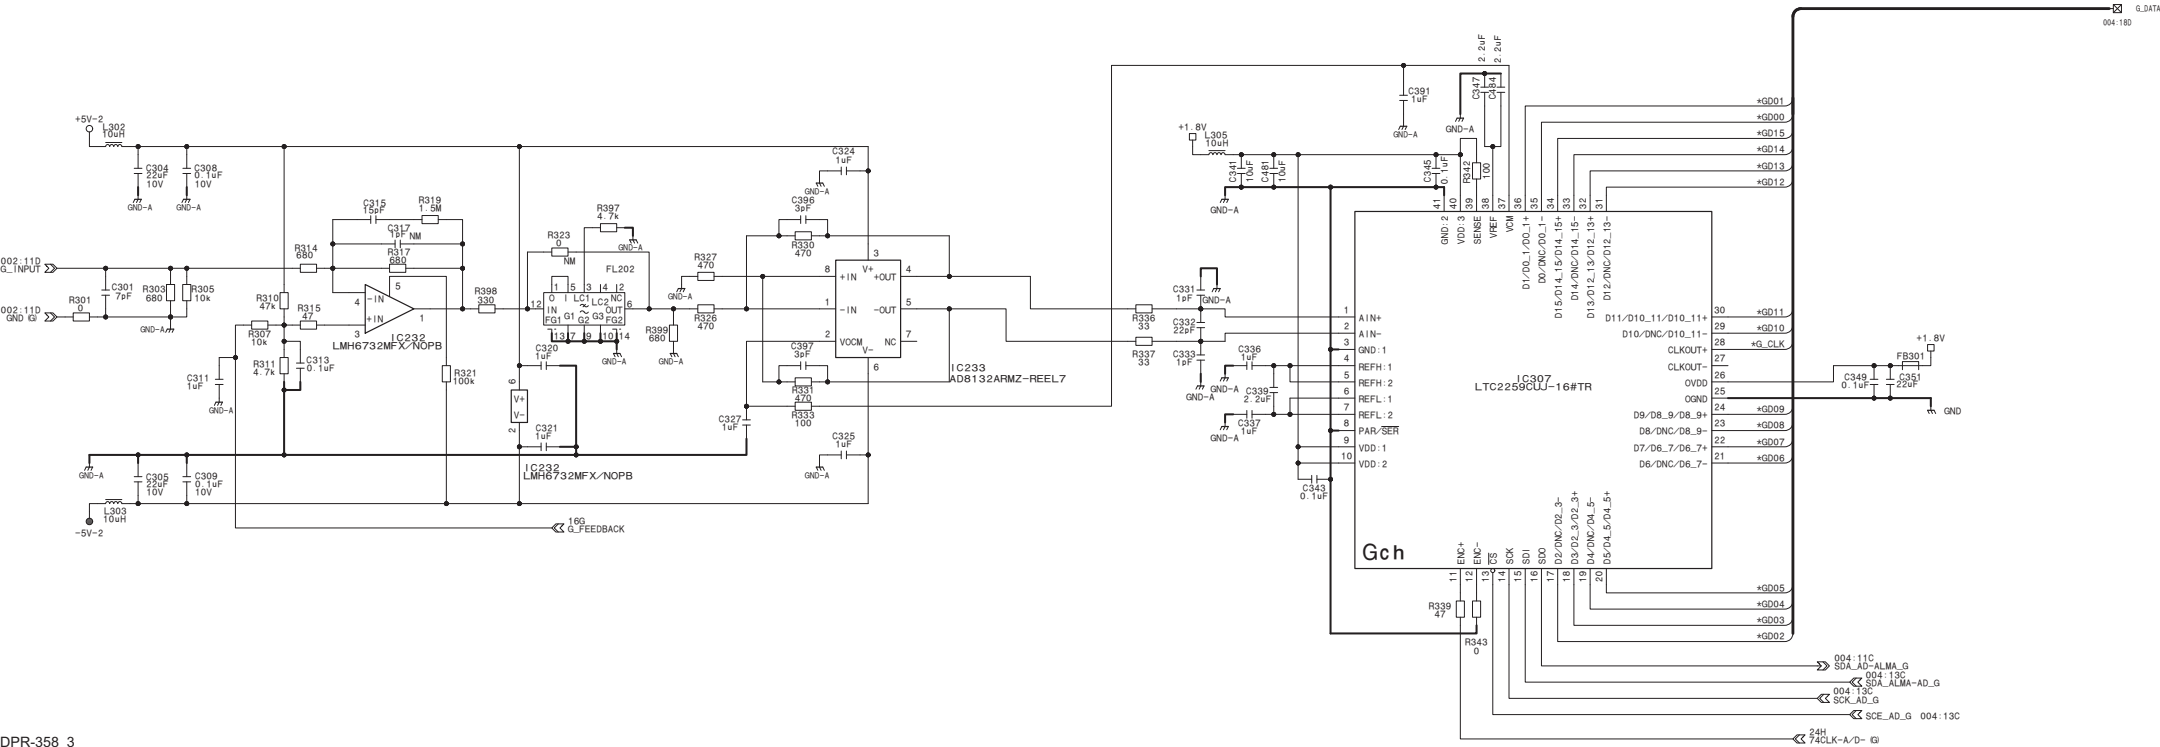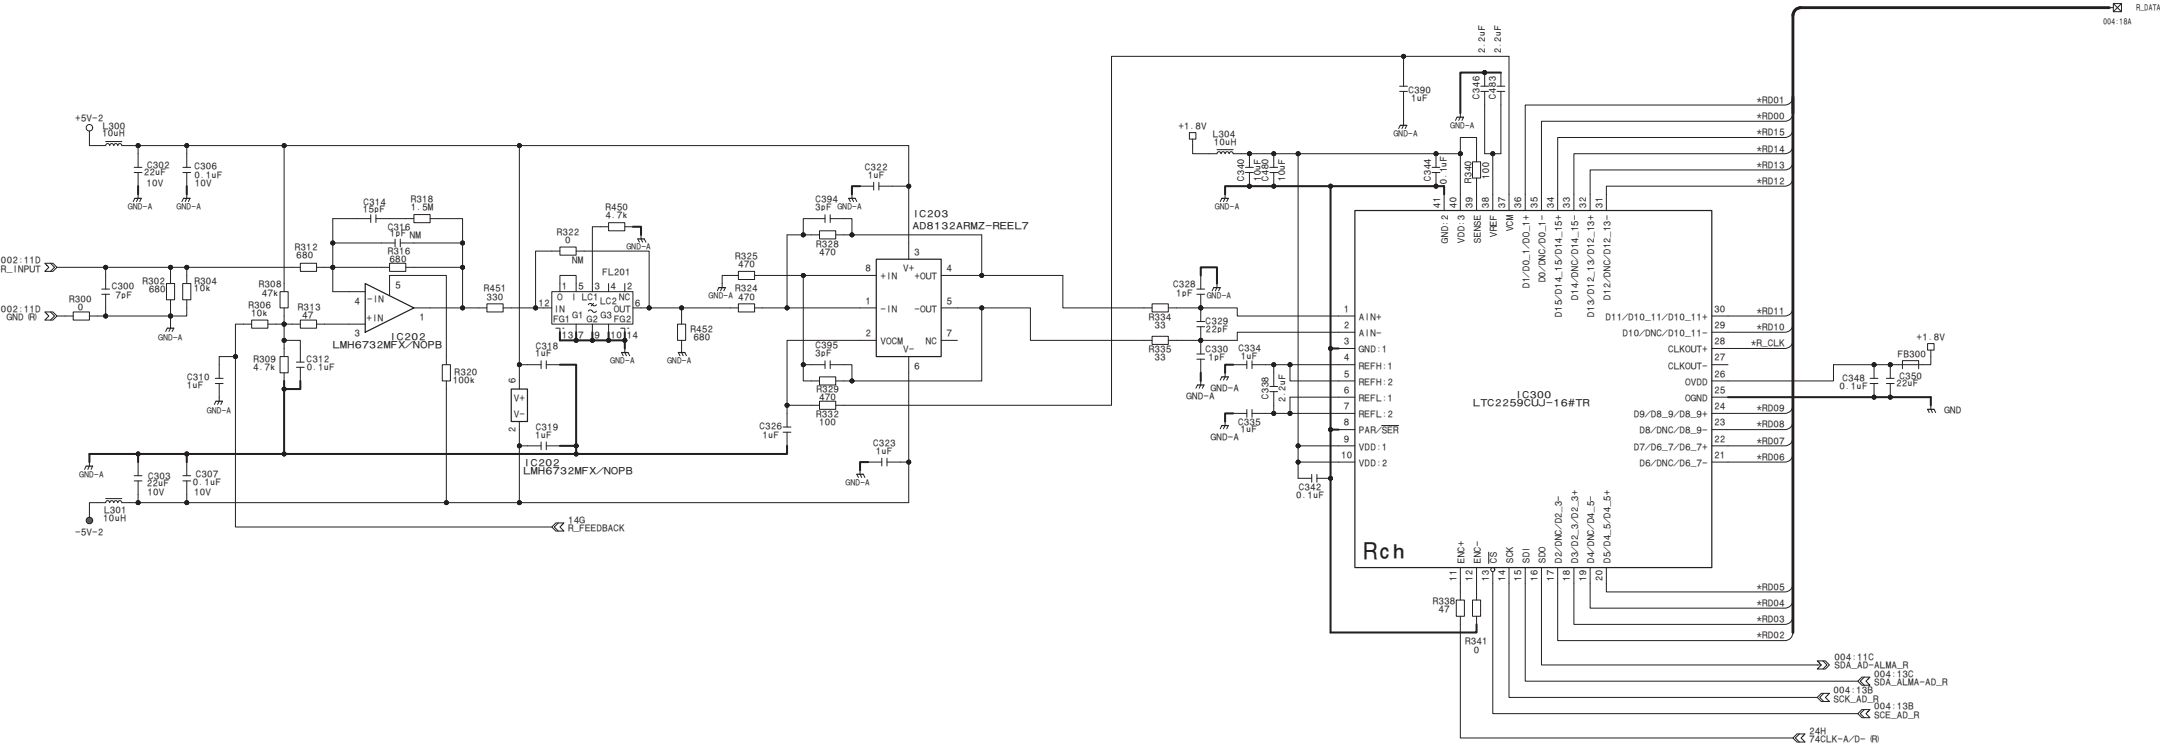


DPR-358_3

DPR-358 (3/9)_R

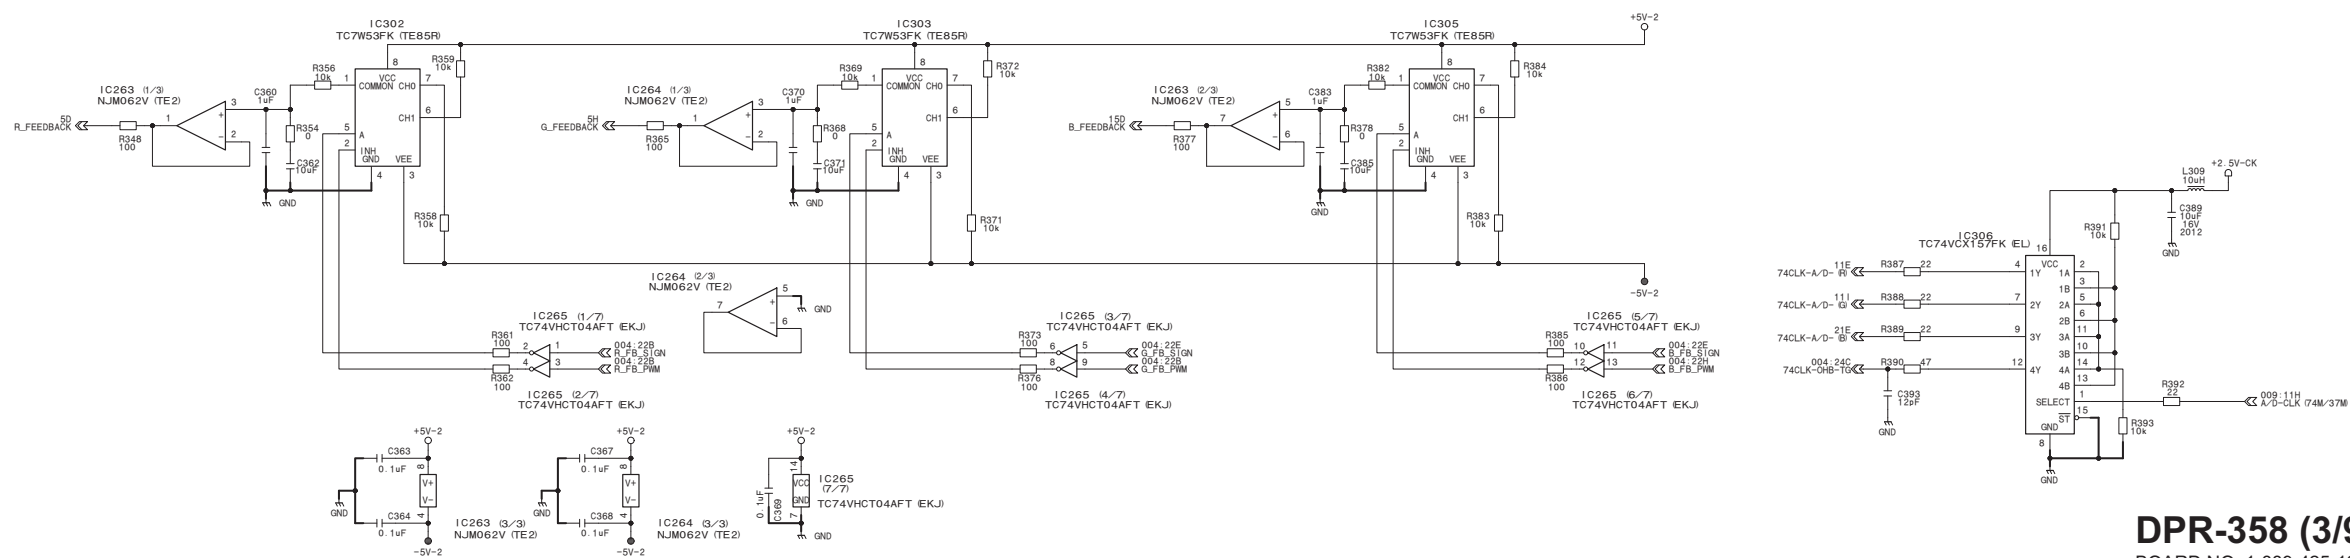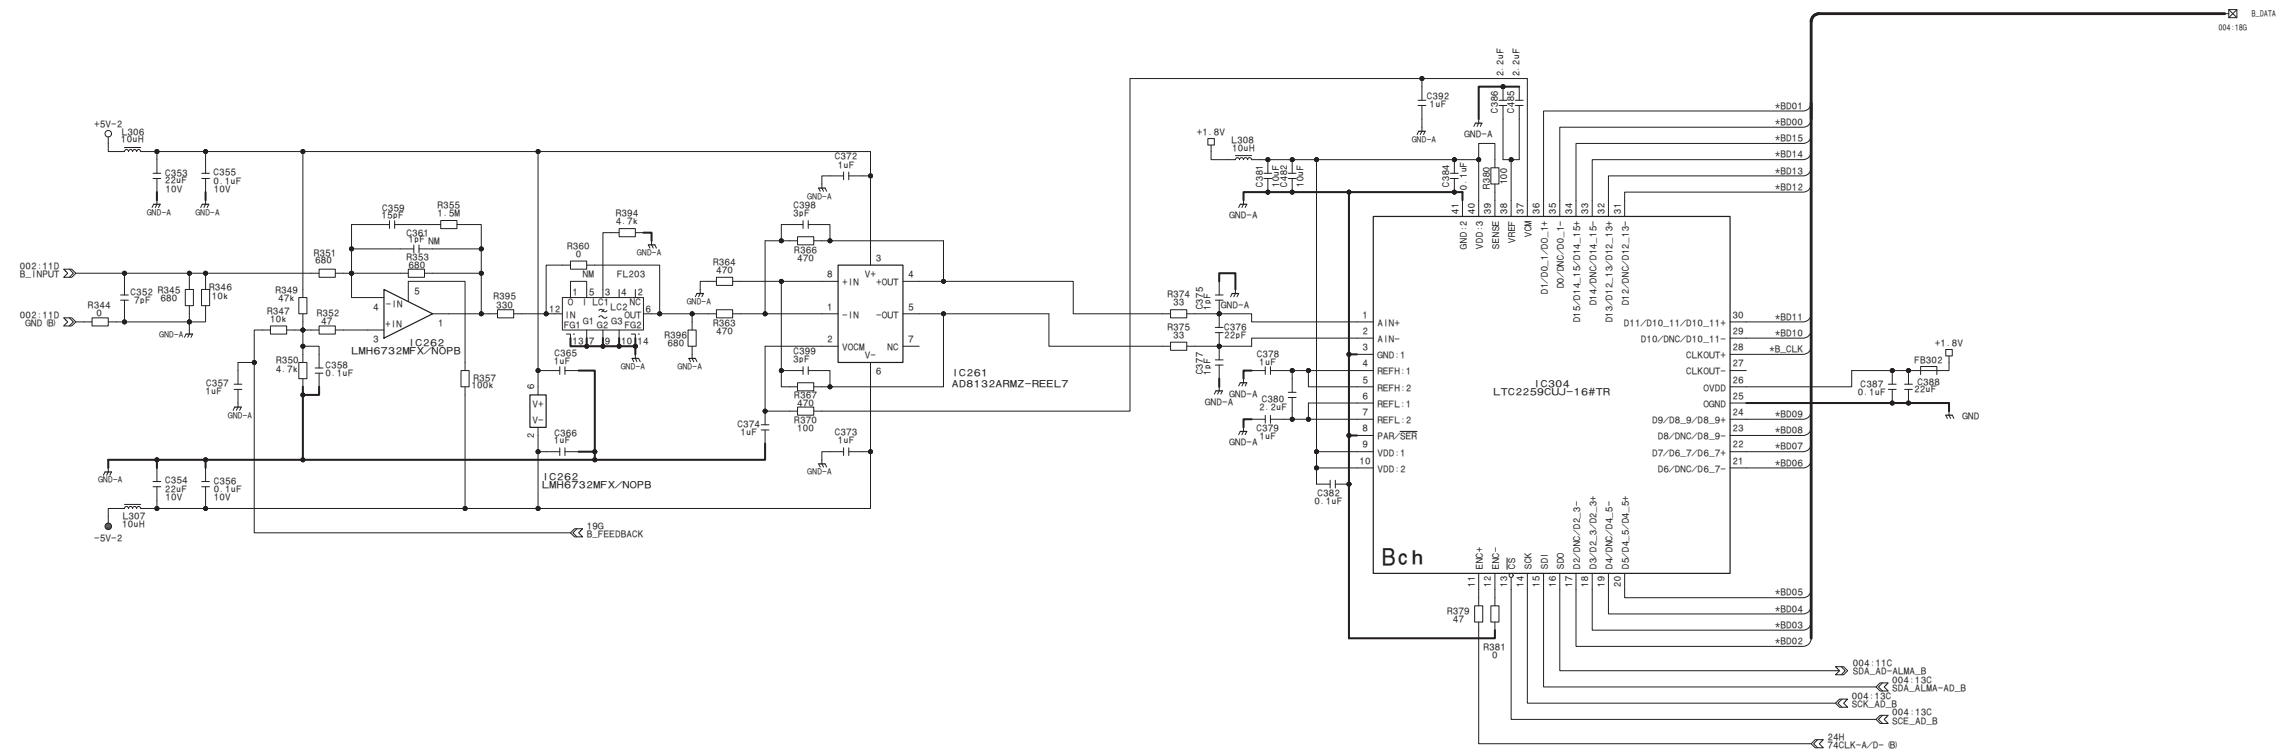


DPR-358 (3/9)
BOARD NO. 1-889-425-12
DPR-358_3

DPR-358 (4/9)_L




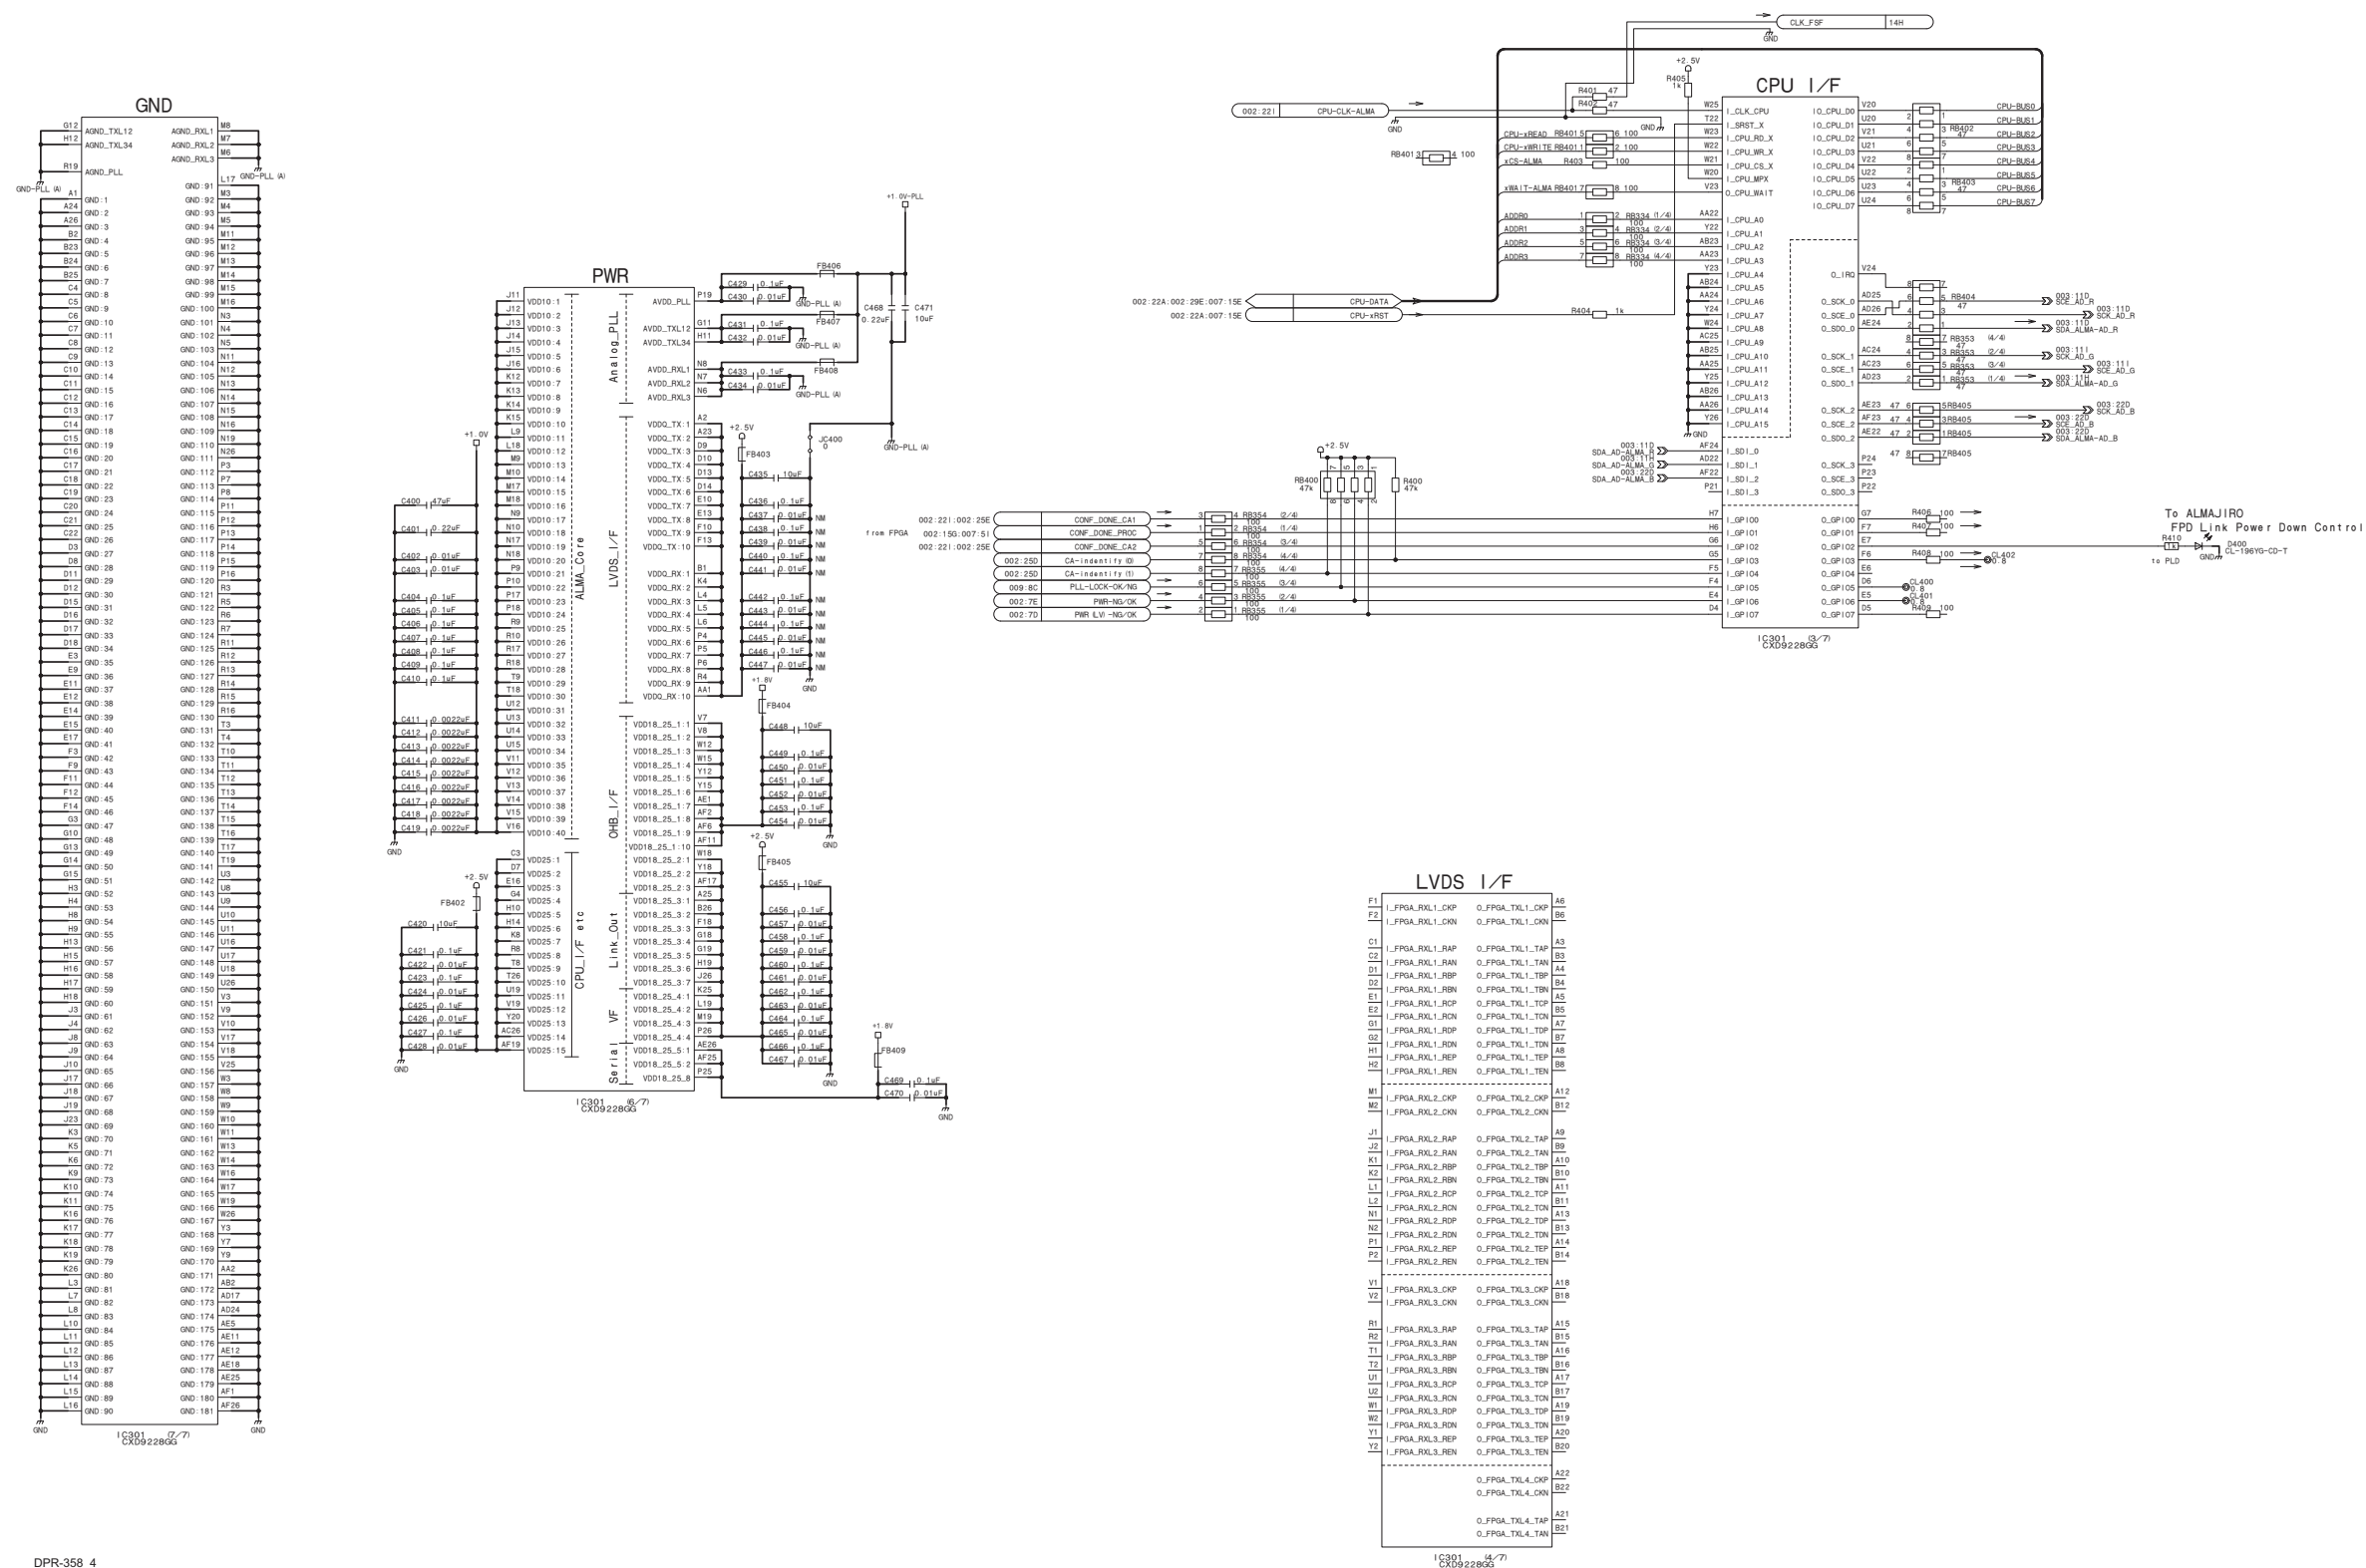


DPR-358 (4/9)_R

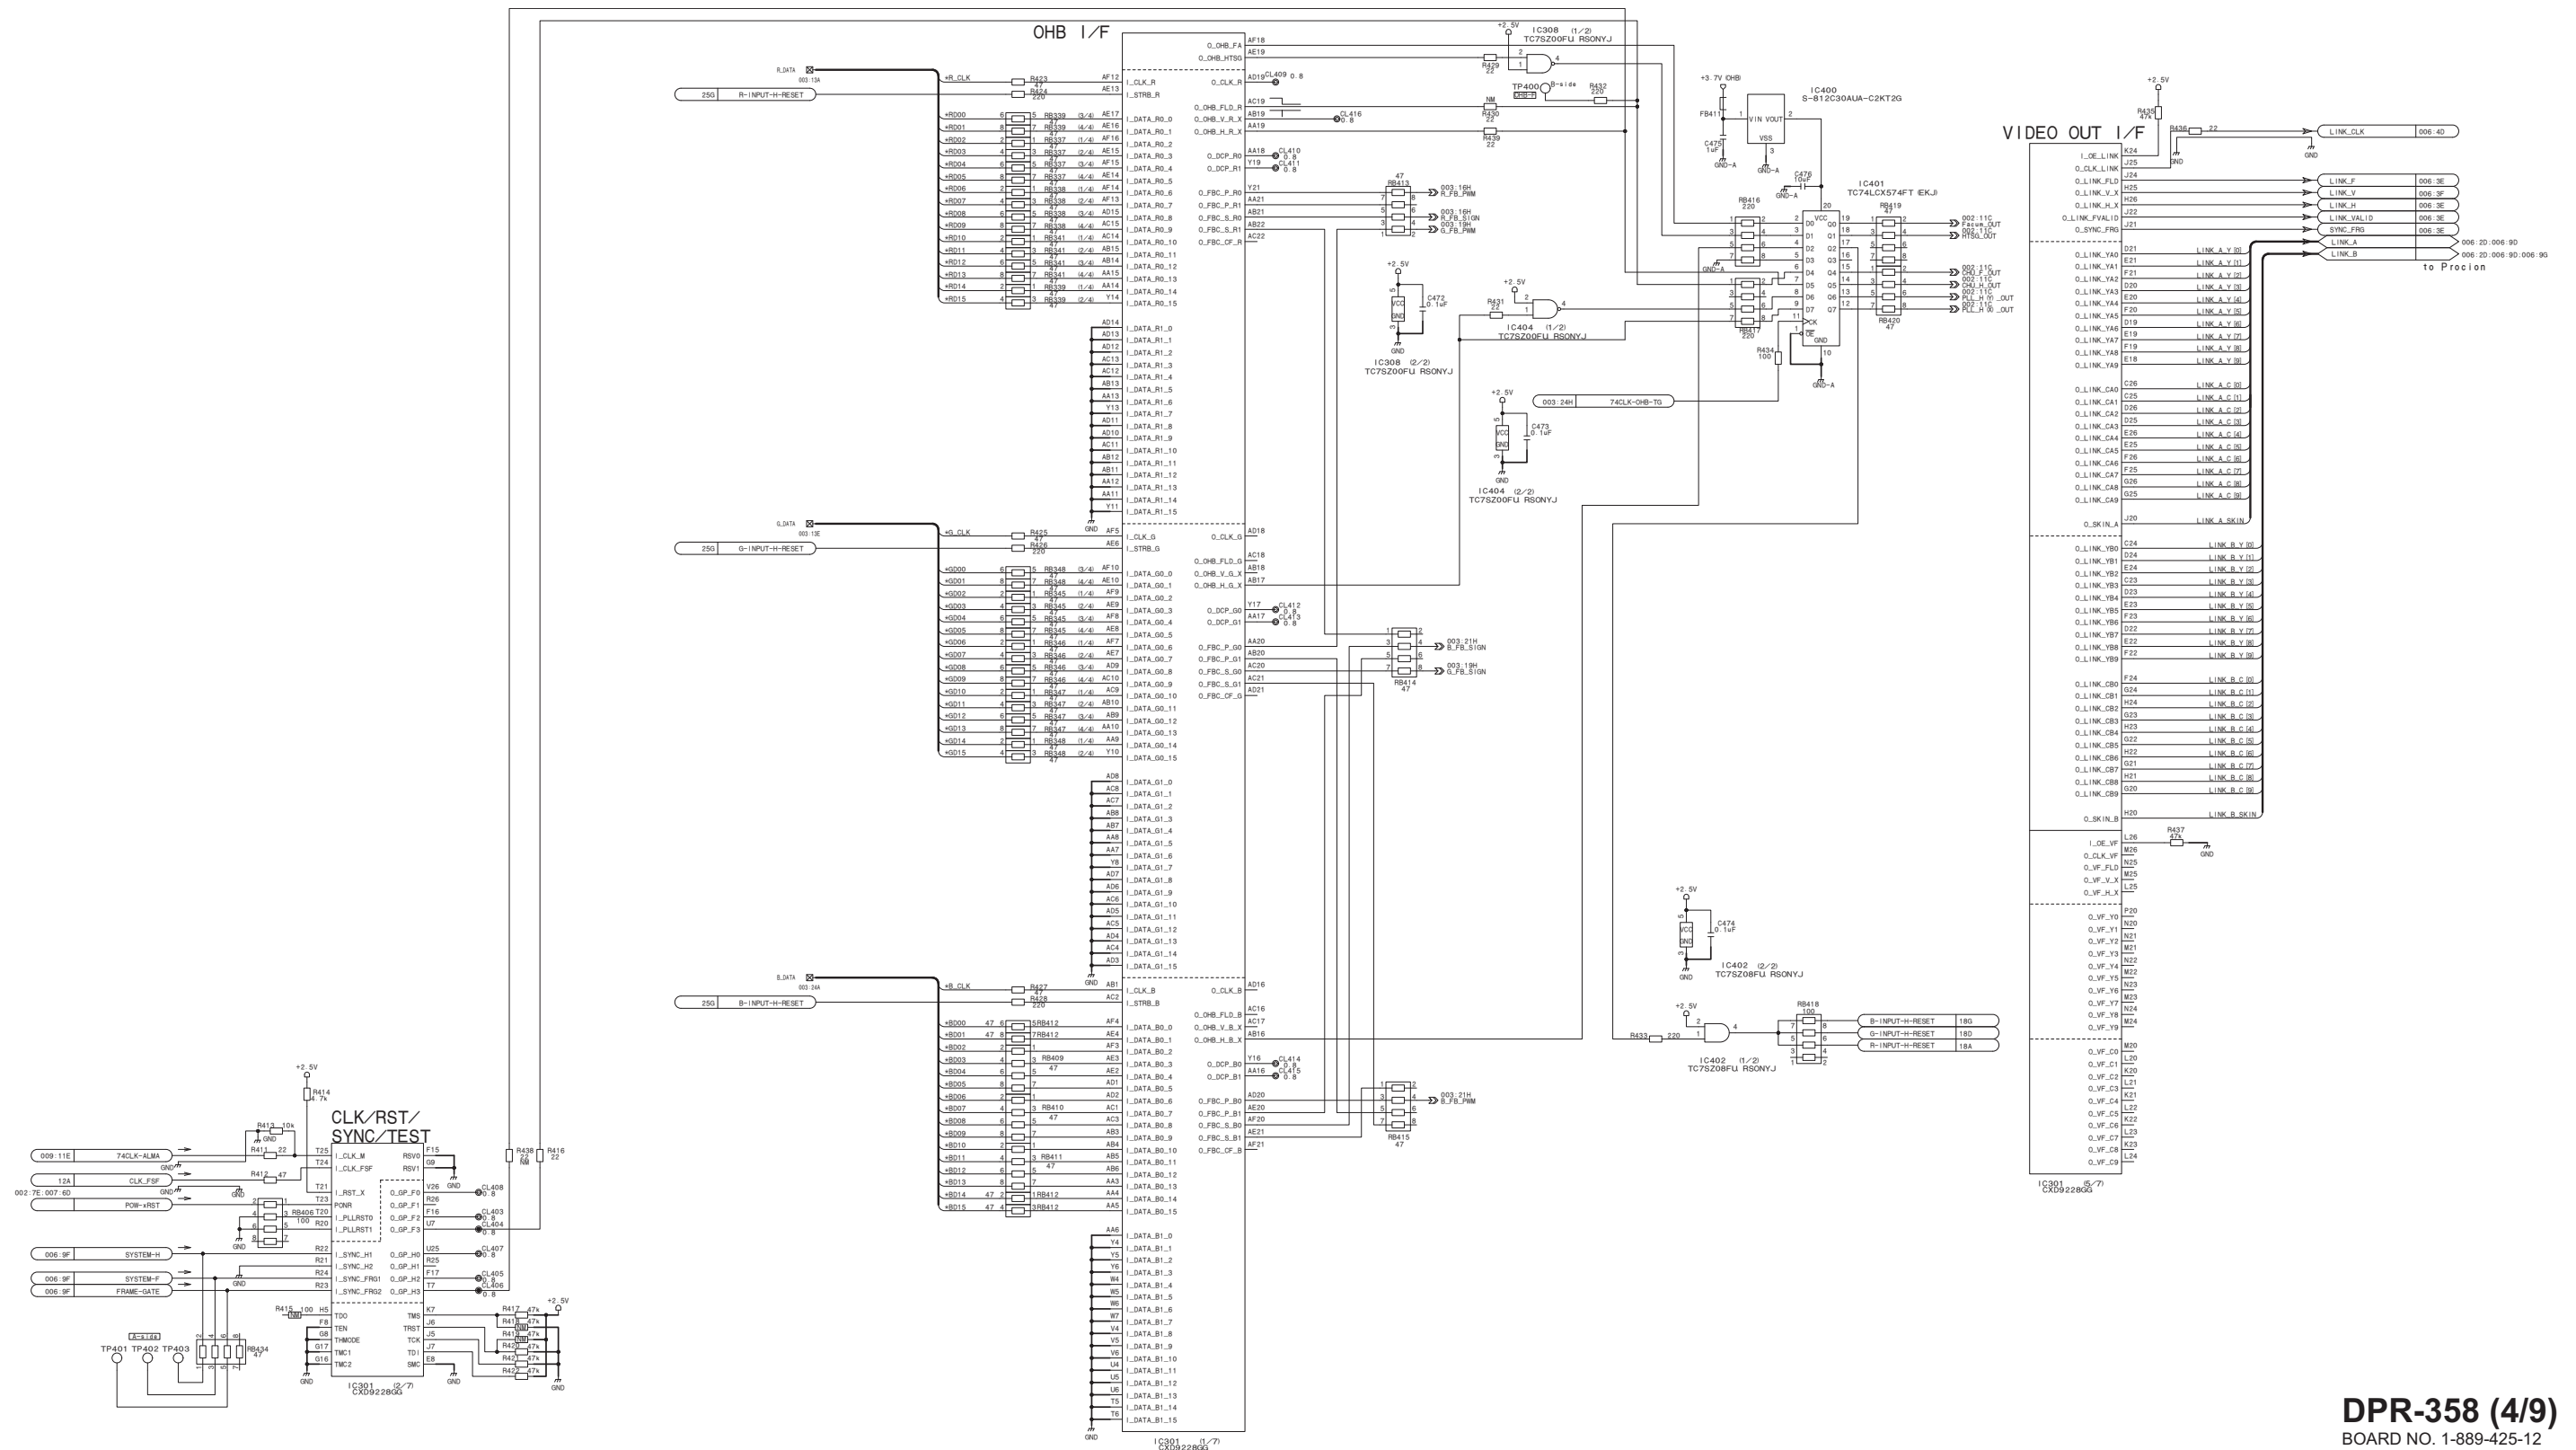


DPR-358 (4/9)
BOARD NO. 1-889-425-12
DPR-358_4


DPR-358 (5/9)_L

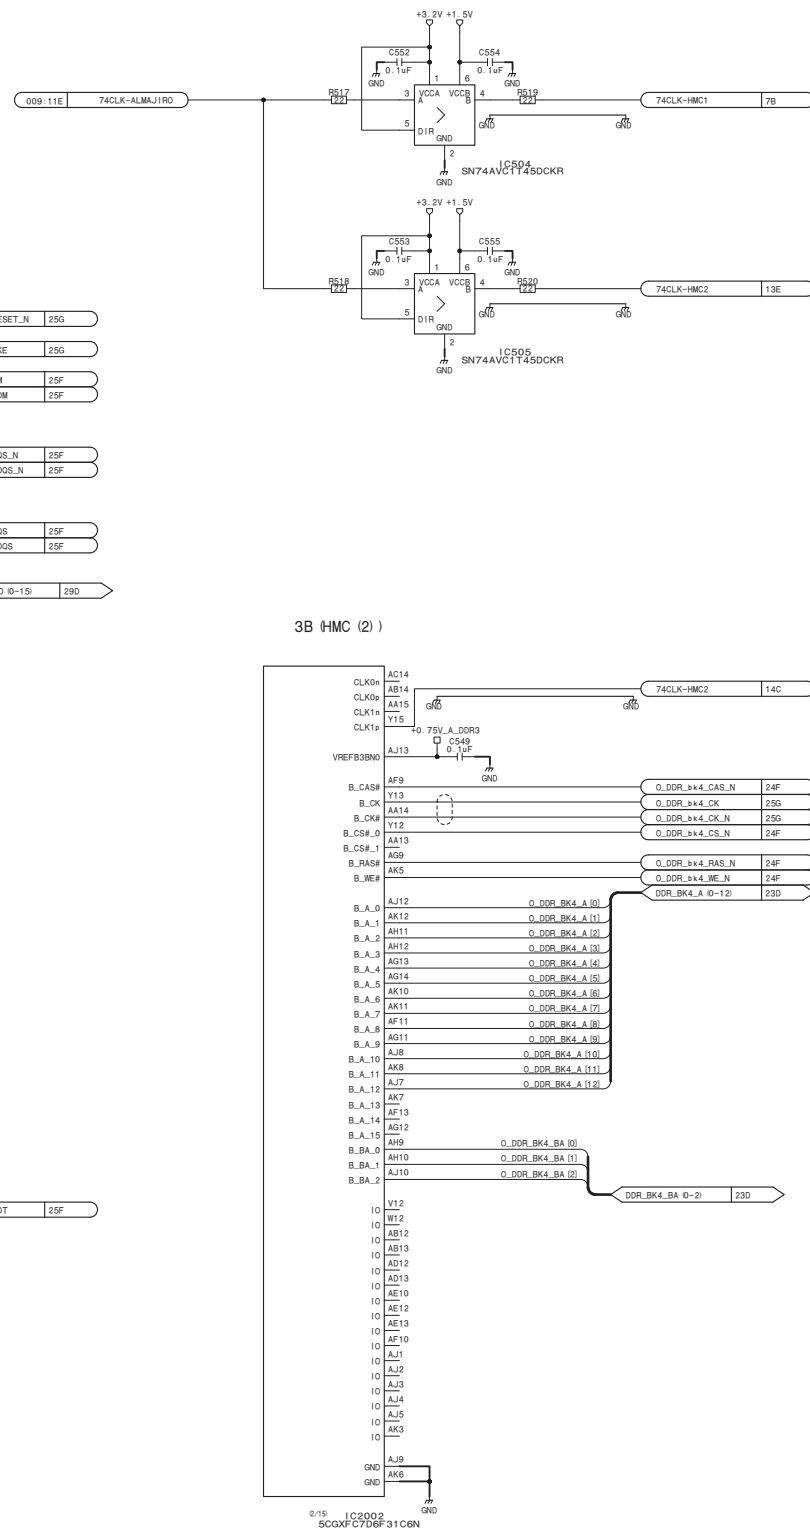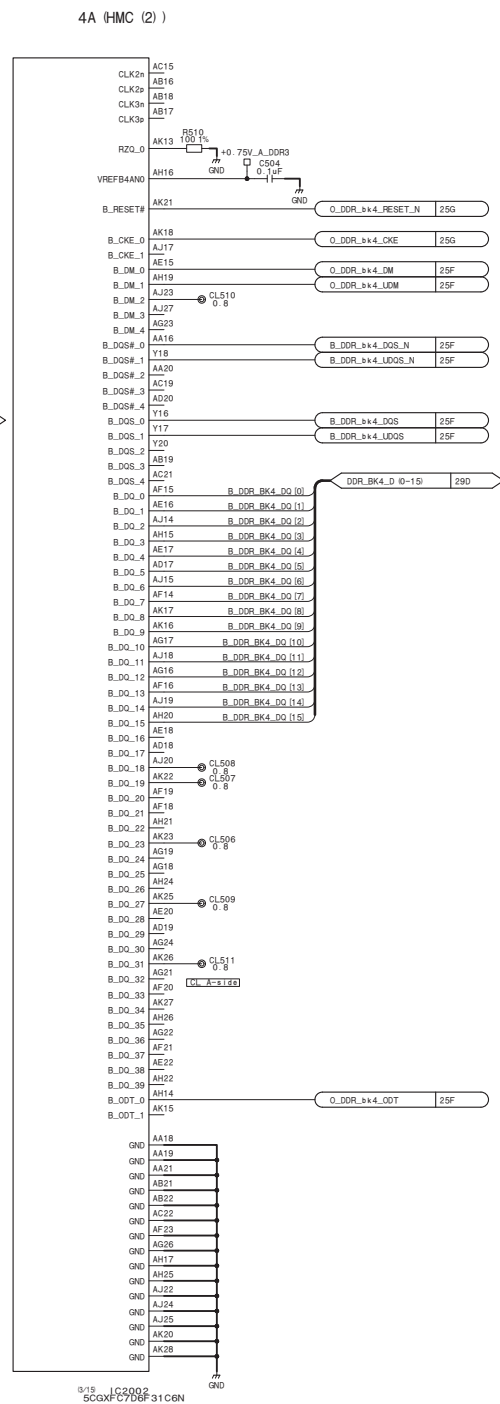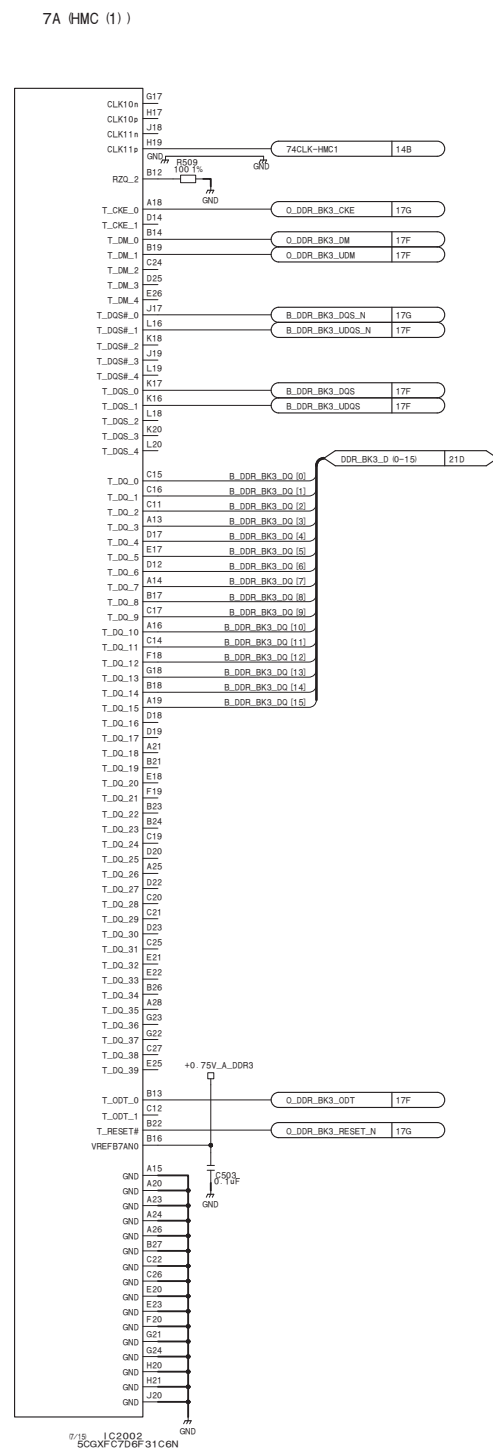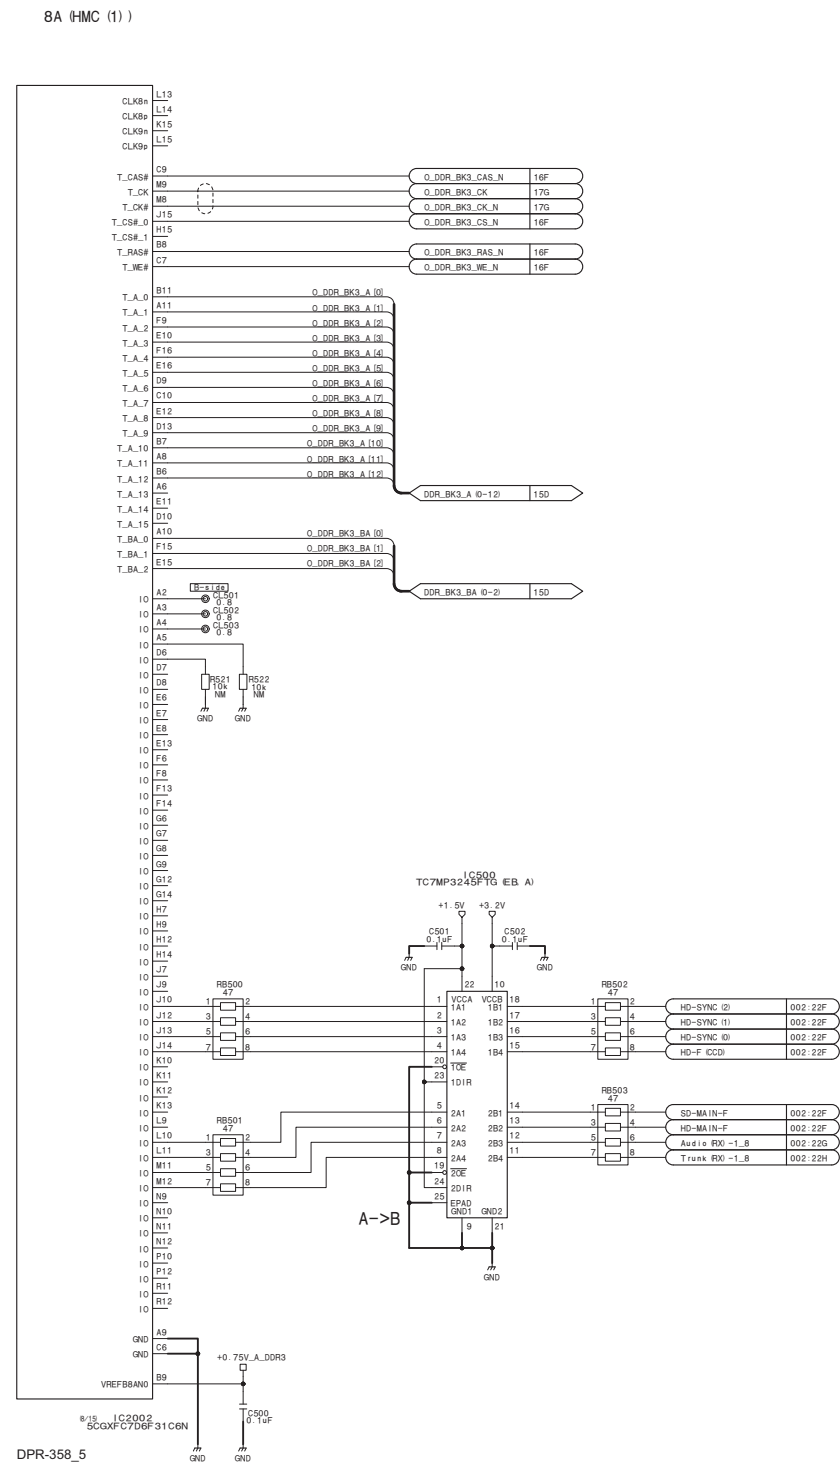


DDR3 SDRAM for Procyon

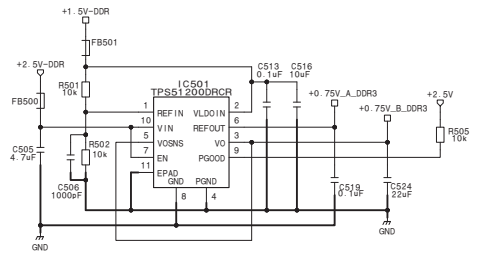



DDR3 SDRAM for Procyon




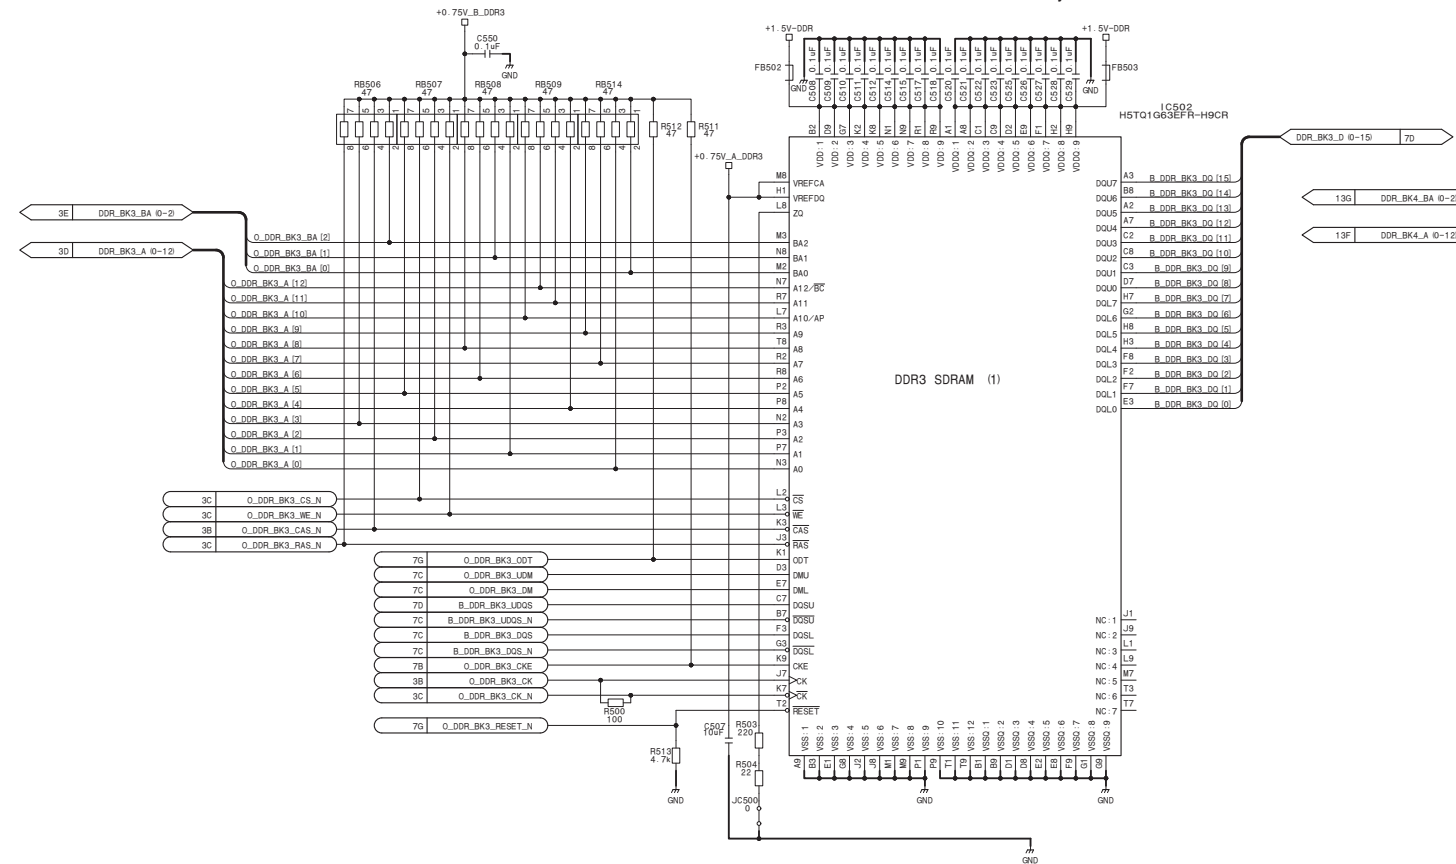


DDR3 SDRAM for Procyon

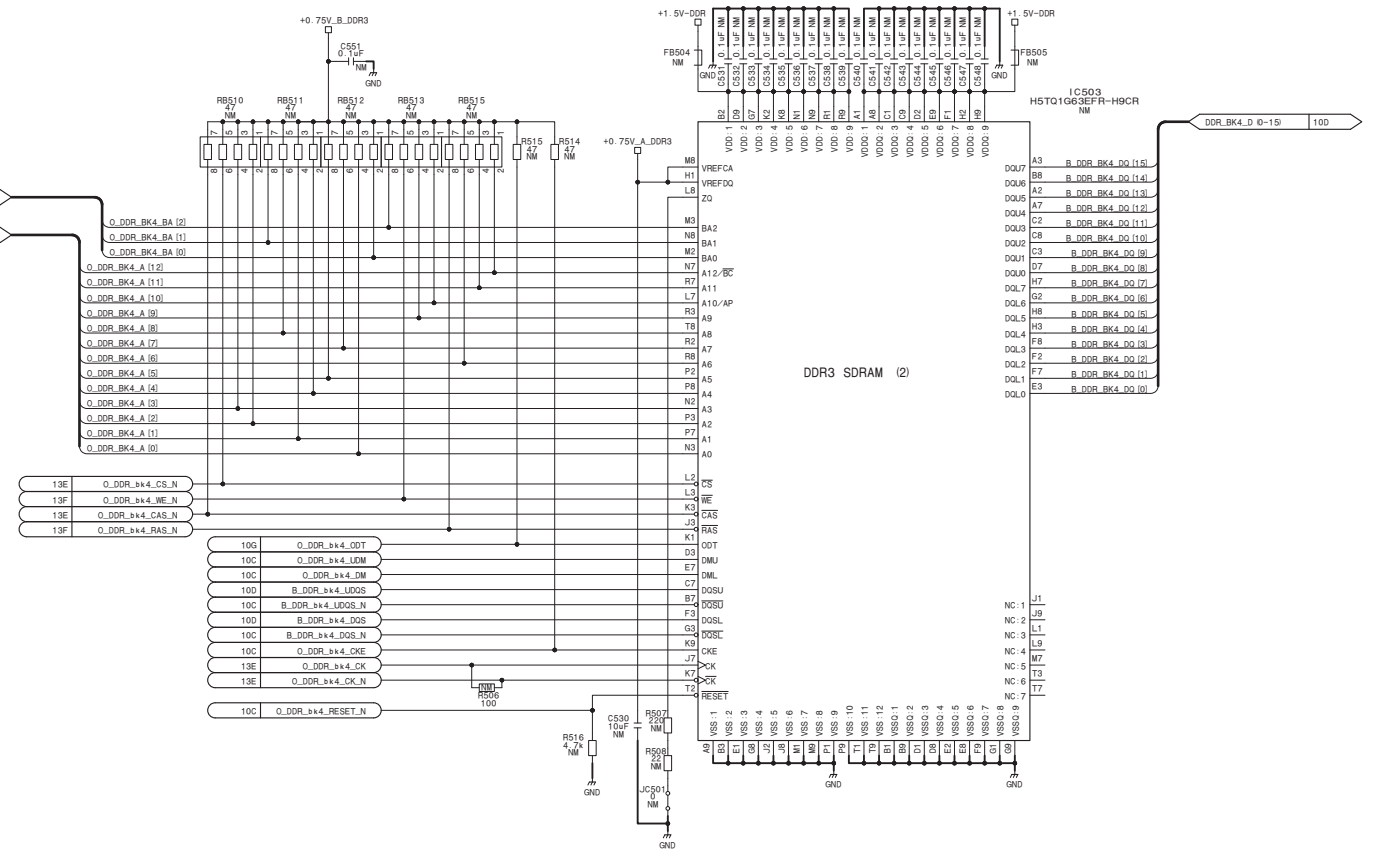

DPR-358 (5/9)
BOARD NO. 1-889-425-12
DPR-358_5

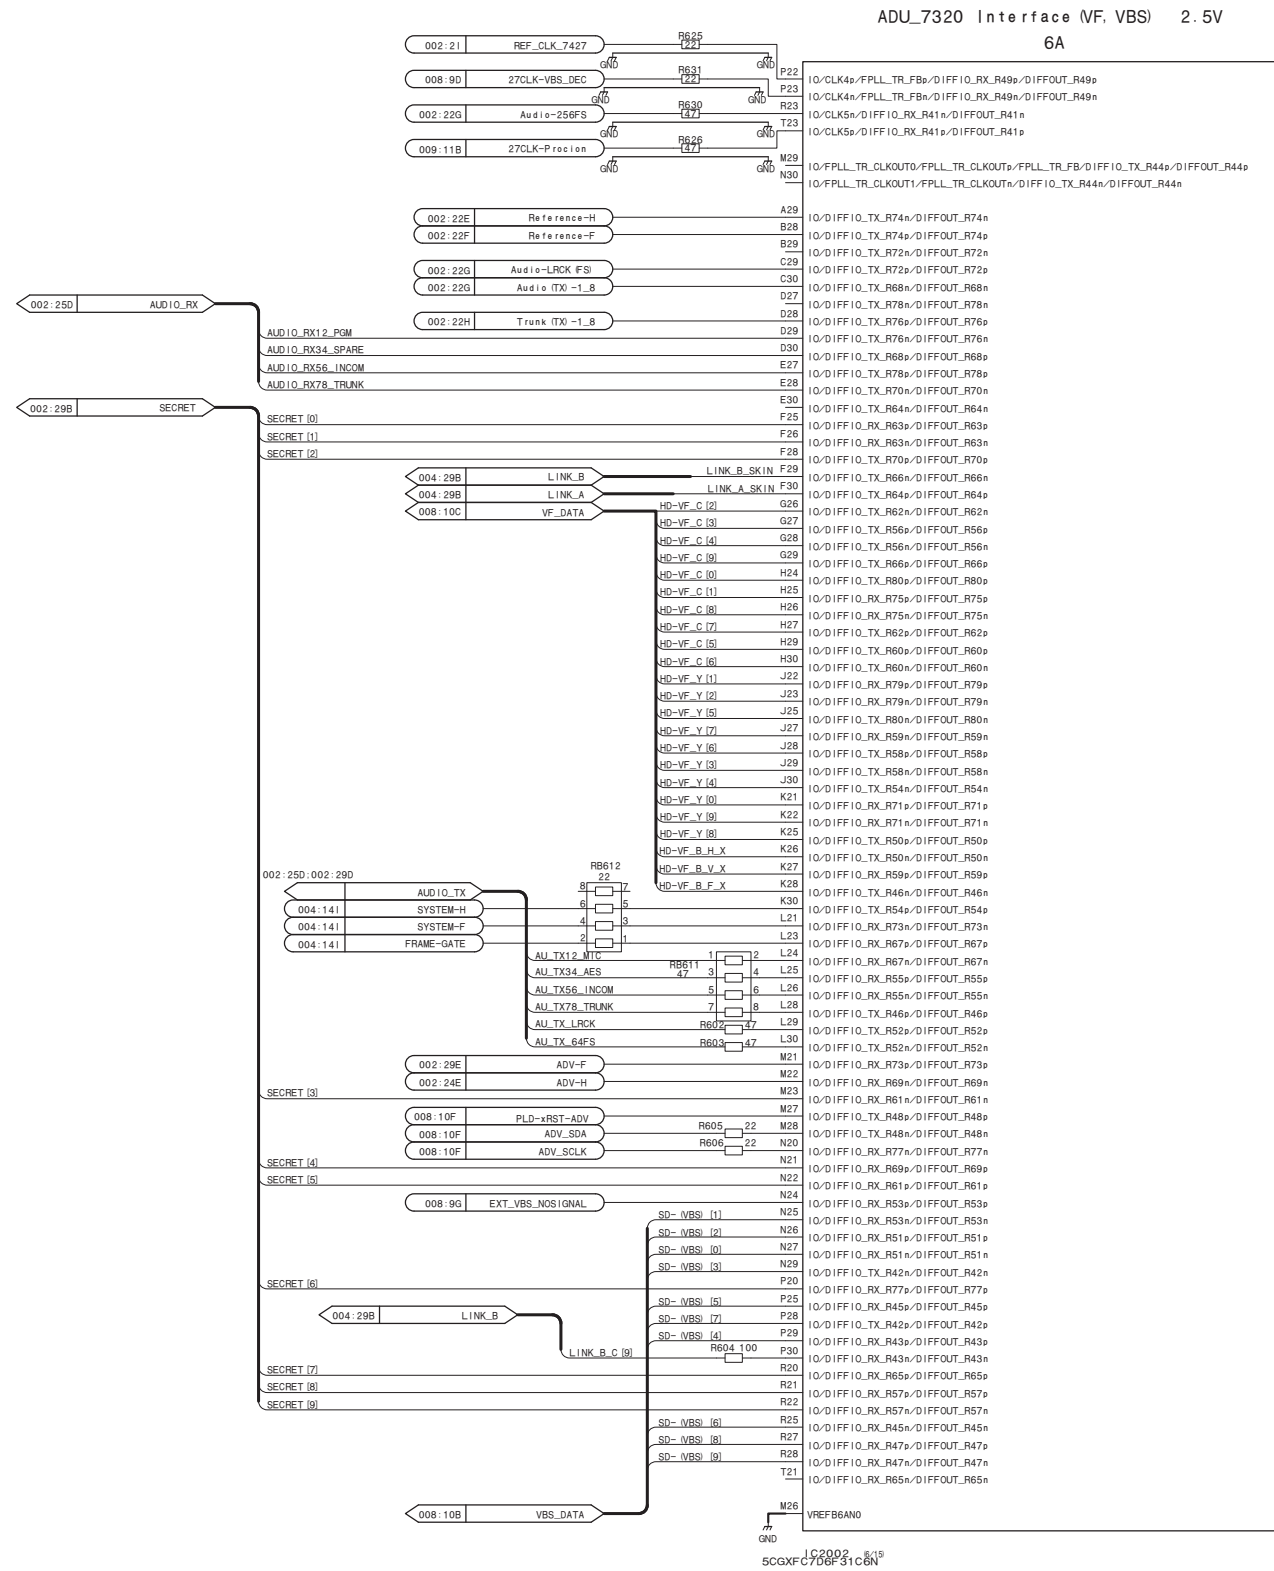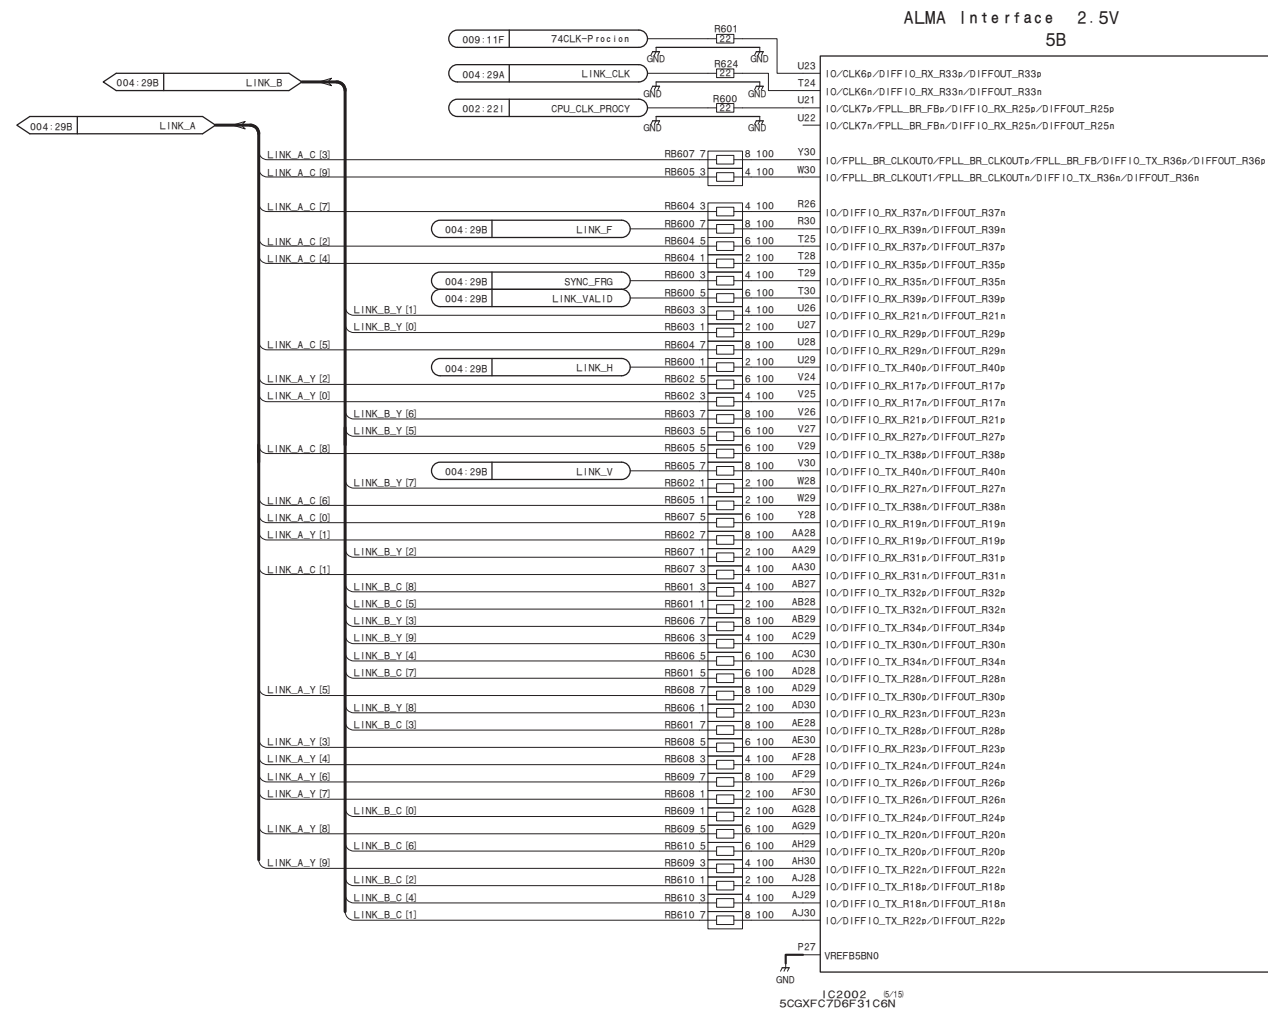


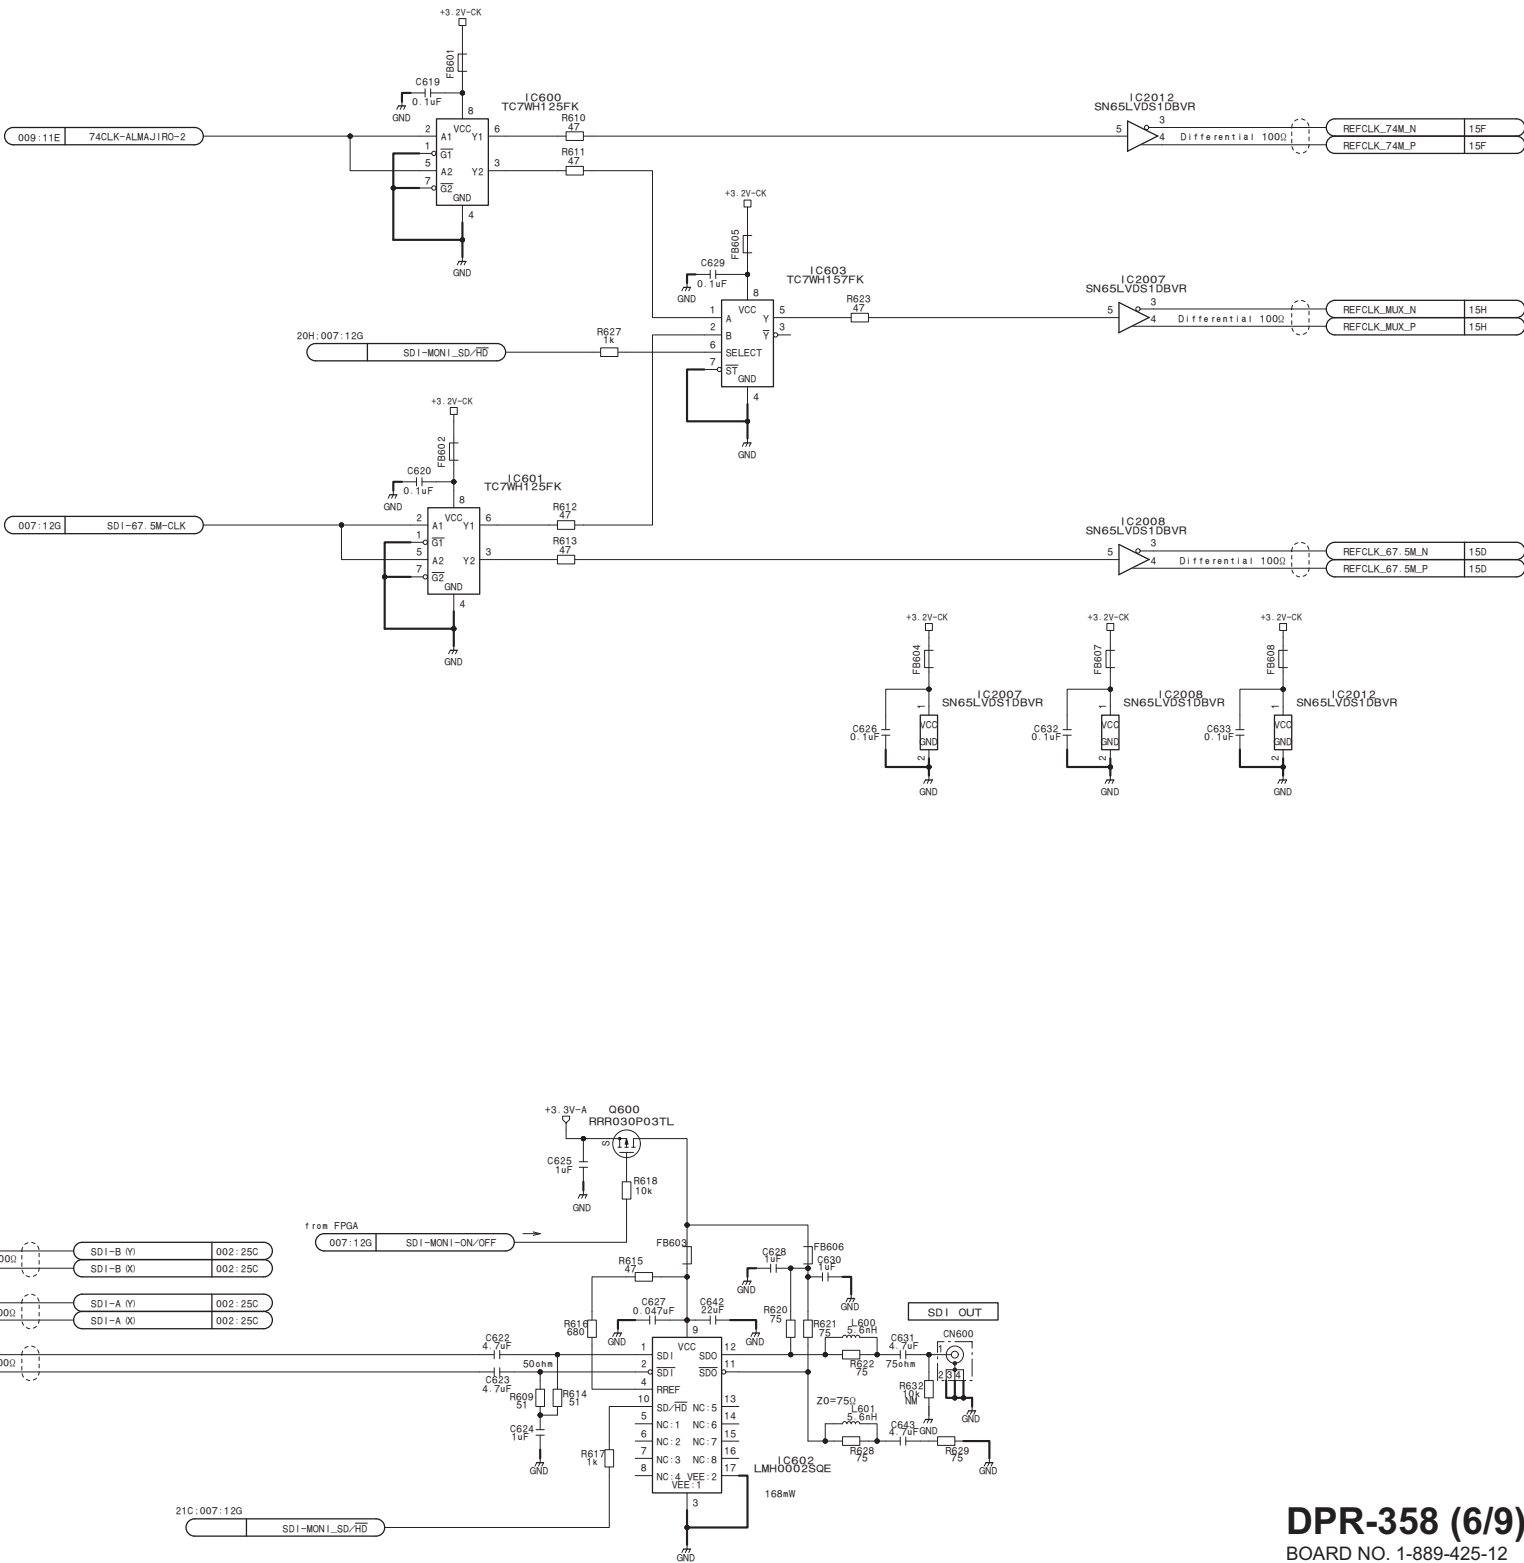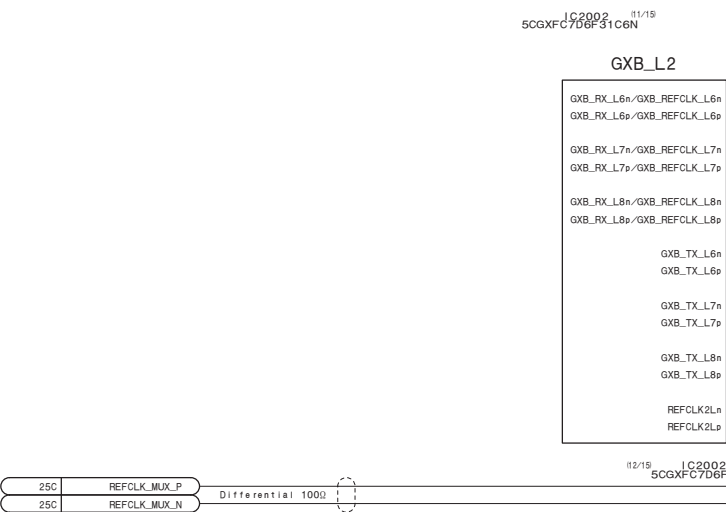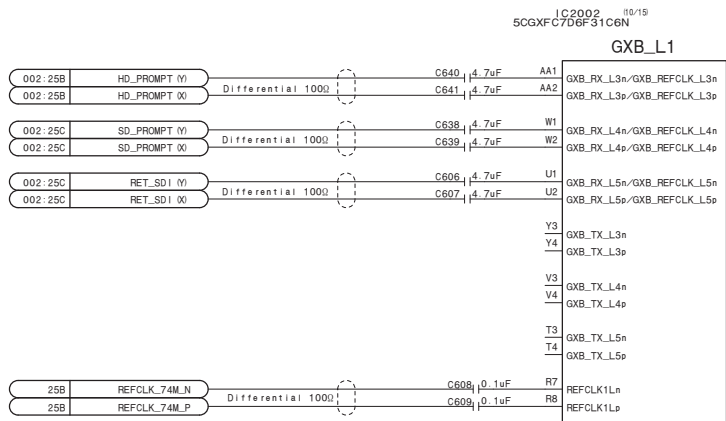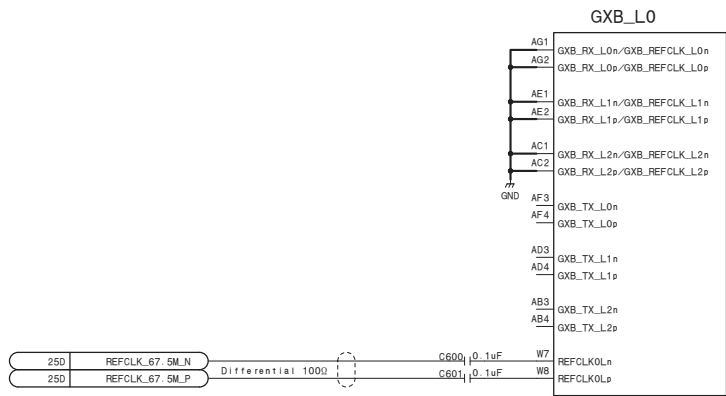

DPR-358 (7/9)_L




DPR-358 (7/9)_R

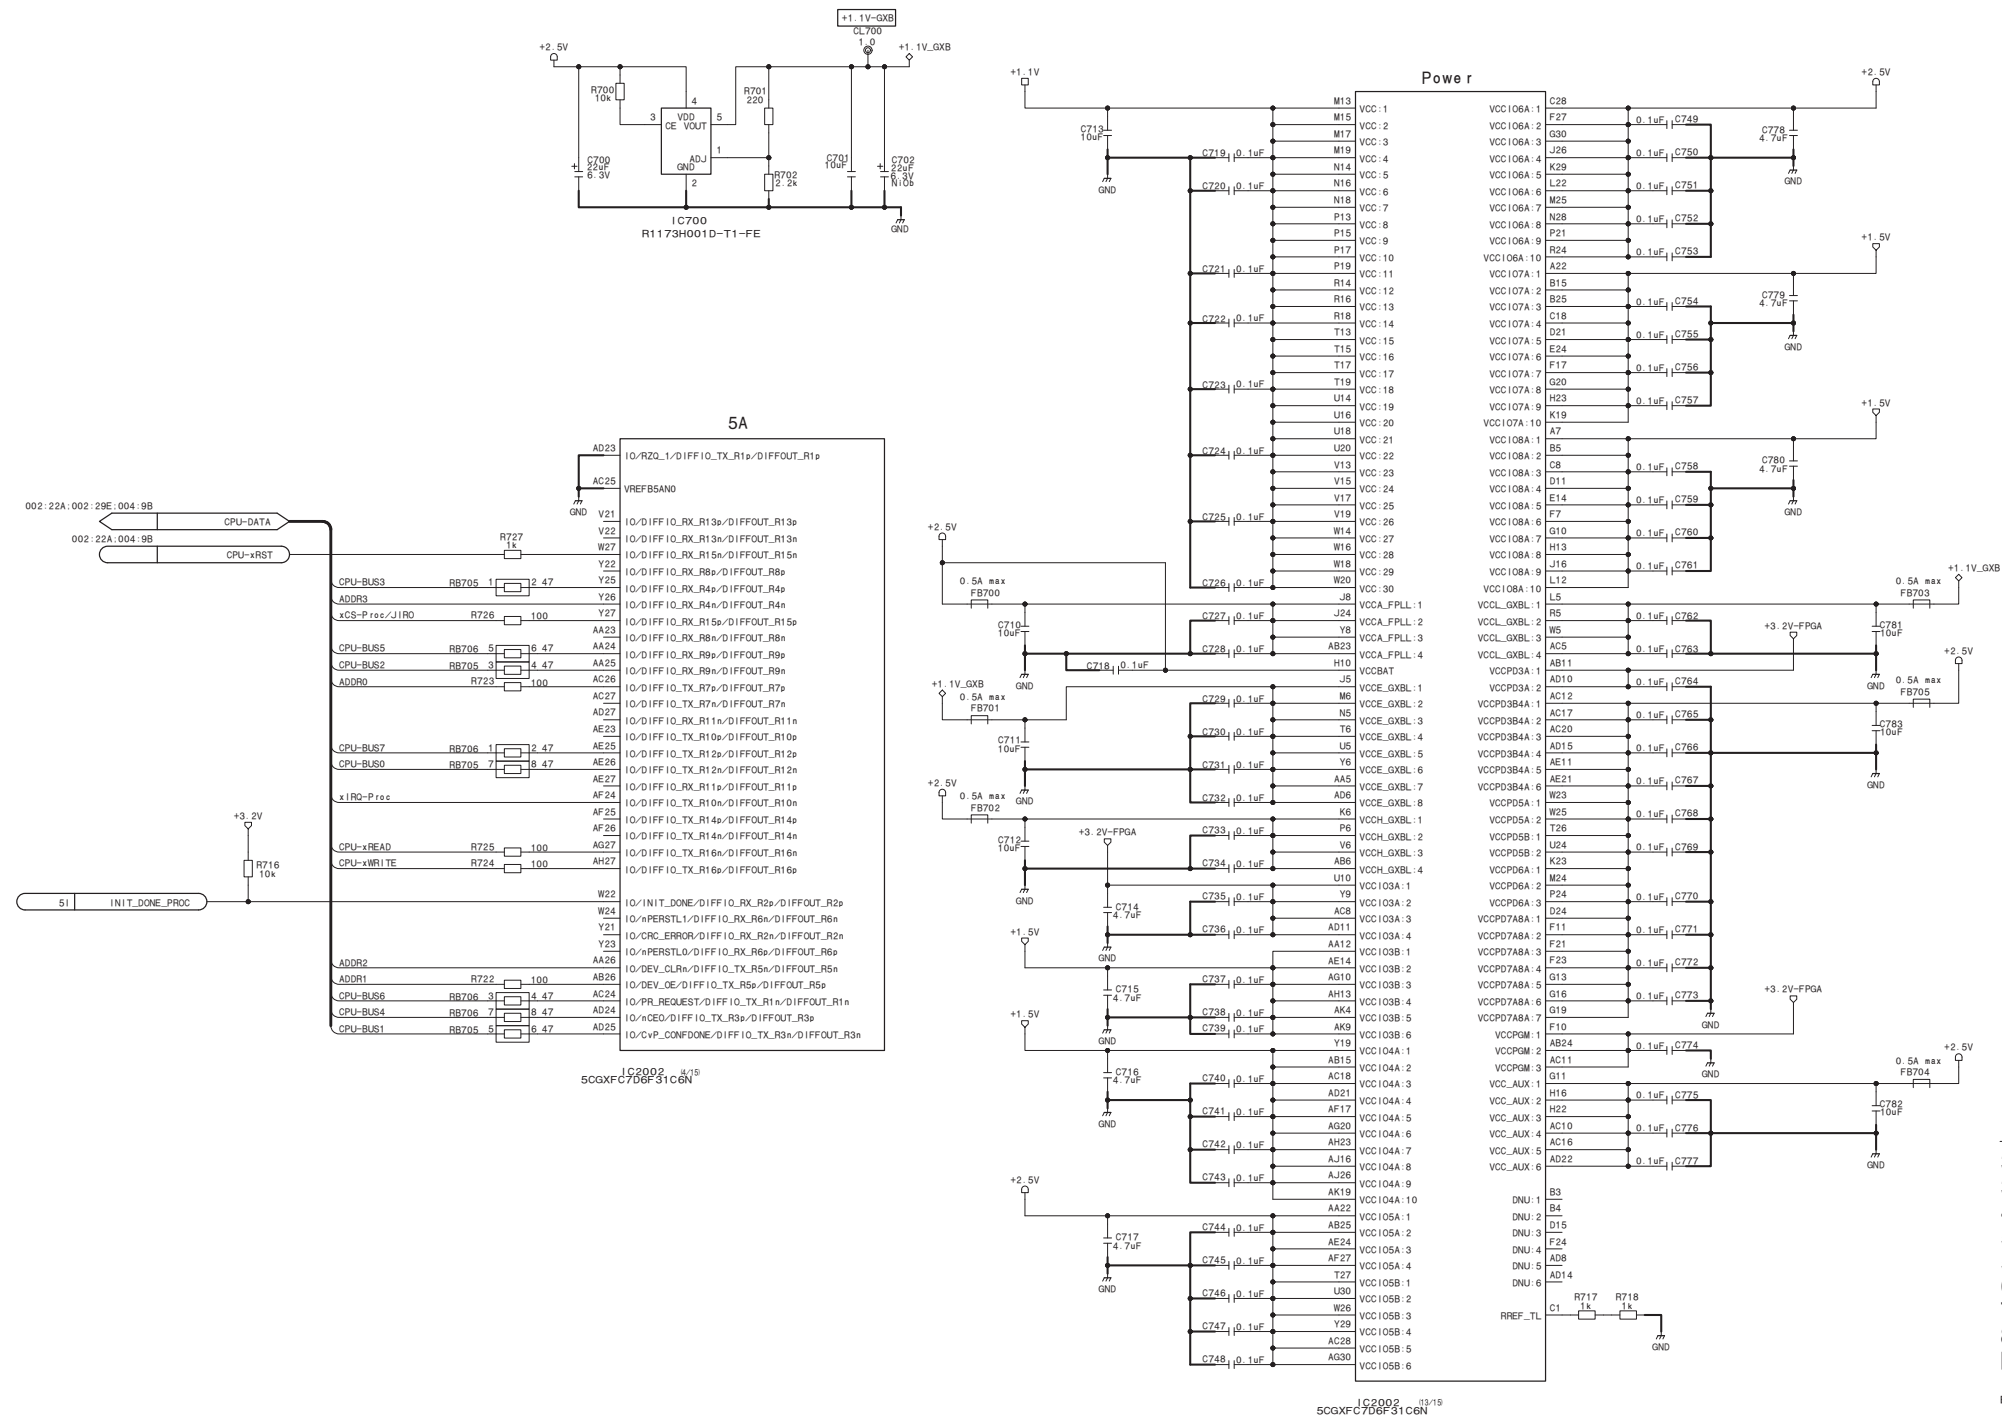


Bank	VCC IO	VCCPD	Assign
3A	3.2V	3.2V	VBS DEC
3B	1.5V	2.5V	HMC (2)
4A	1.5V	2.5V	HMC (2)
5A	2.5V	2.5V	CPU
5B	2.5V	2.5V	ALMA
6A	2.5V	2.5V	VF, VBS
7A	1.5V	2.5V	HMC (1)
8A	1.5V	2.5V	HMC (1)
B0L–B2L	1.1V	–	SDI

B0L-B2L : VCCL_GXBL VCCE_GXBL




IC2002 (14/15)
5CGXFC7D6F31C6N

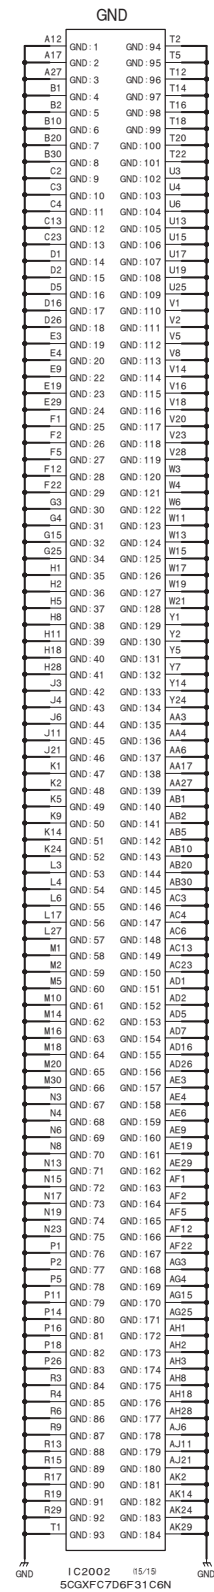


DPR-358 (7/9)

BOARD NO. 1-889-425-12
DPR-358_7

DPR-358 (8/9)

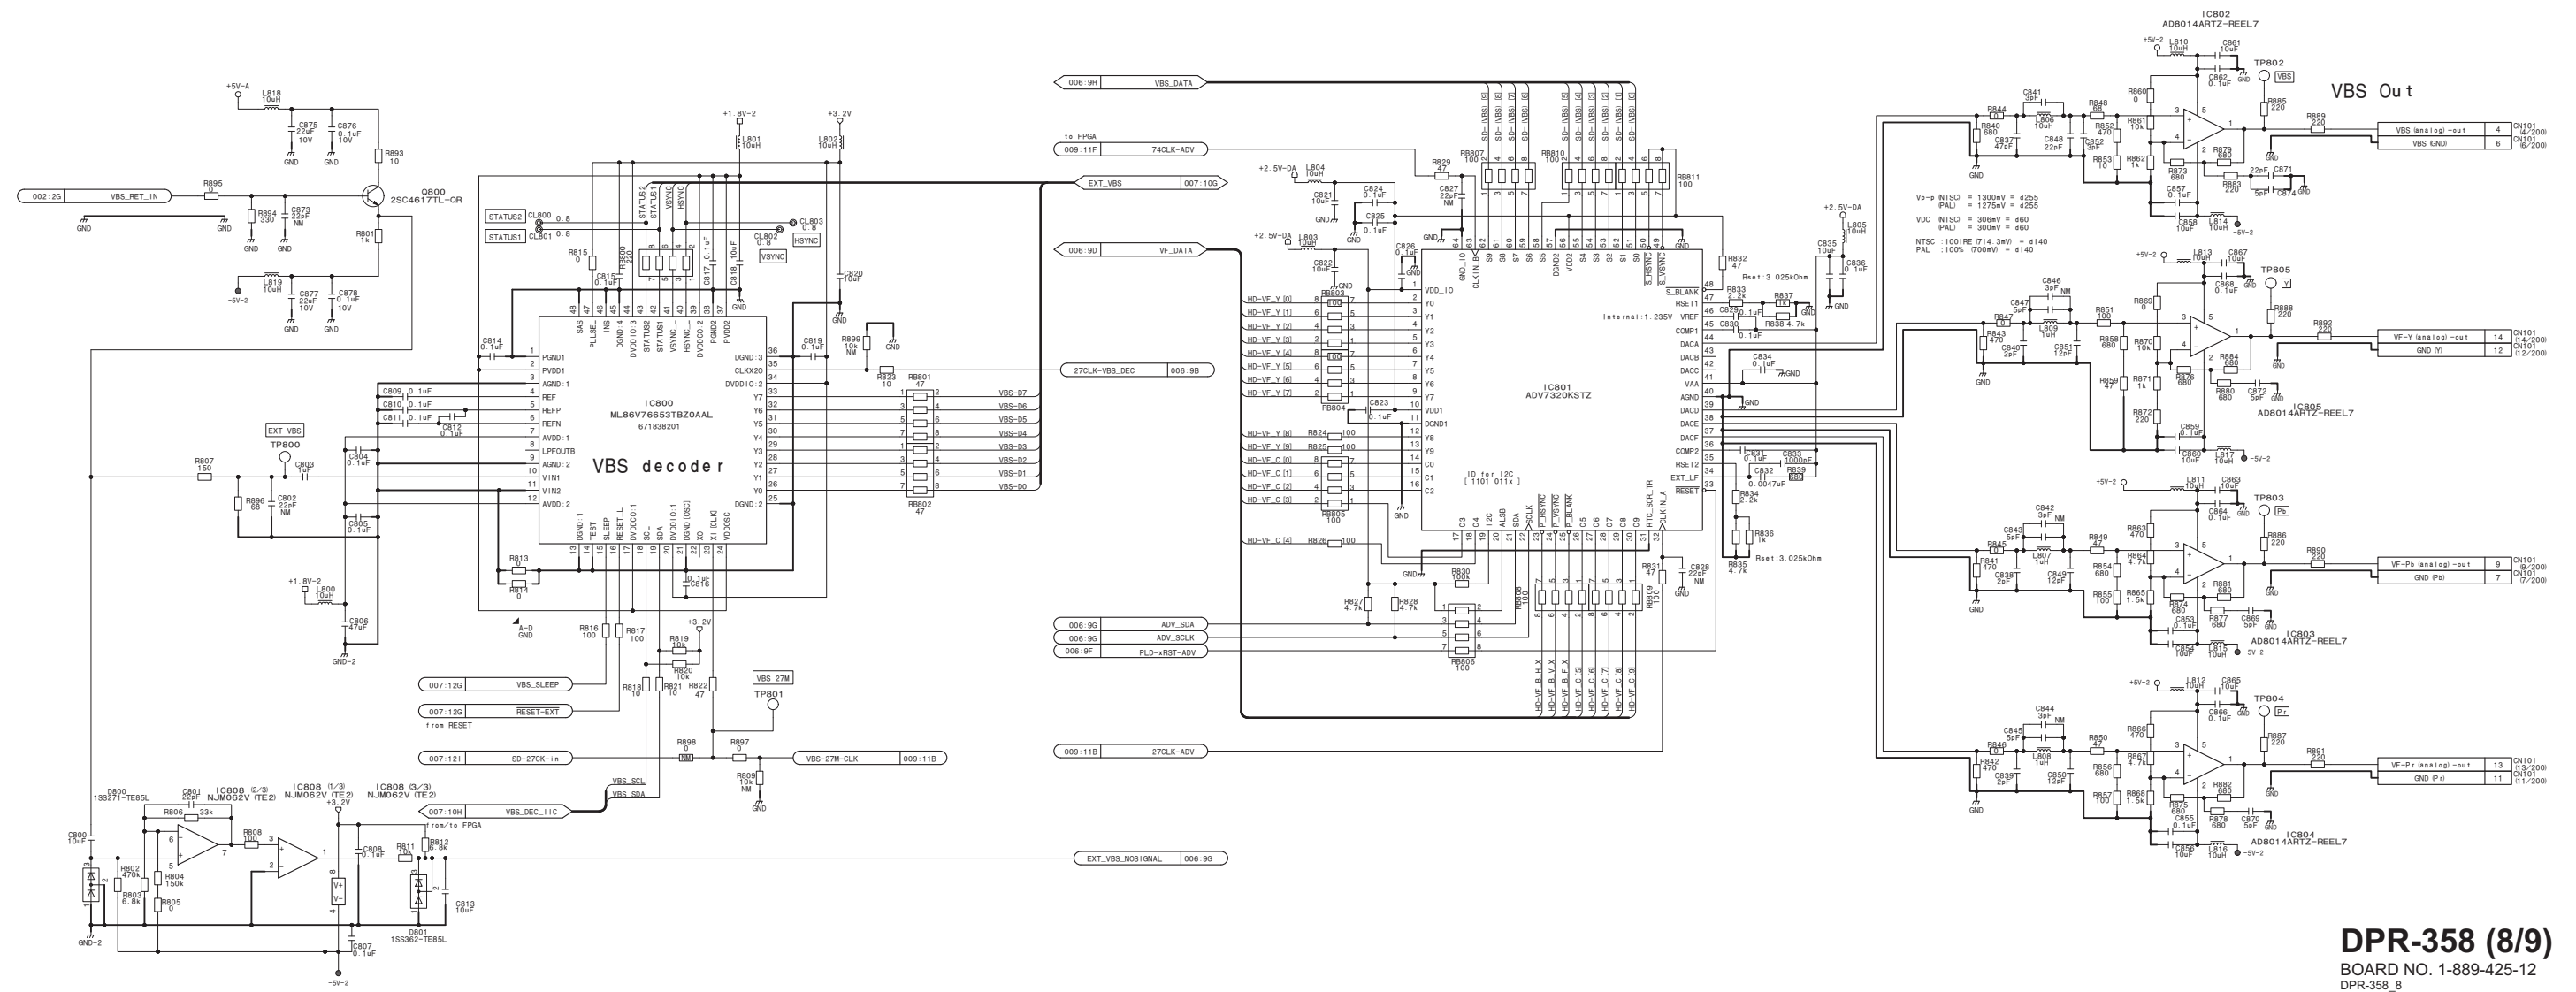


DPR-358 (9/9)

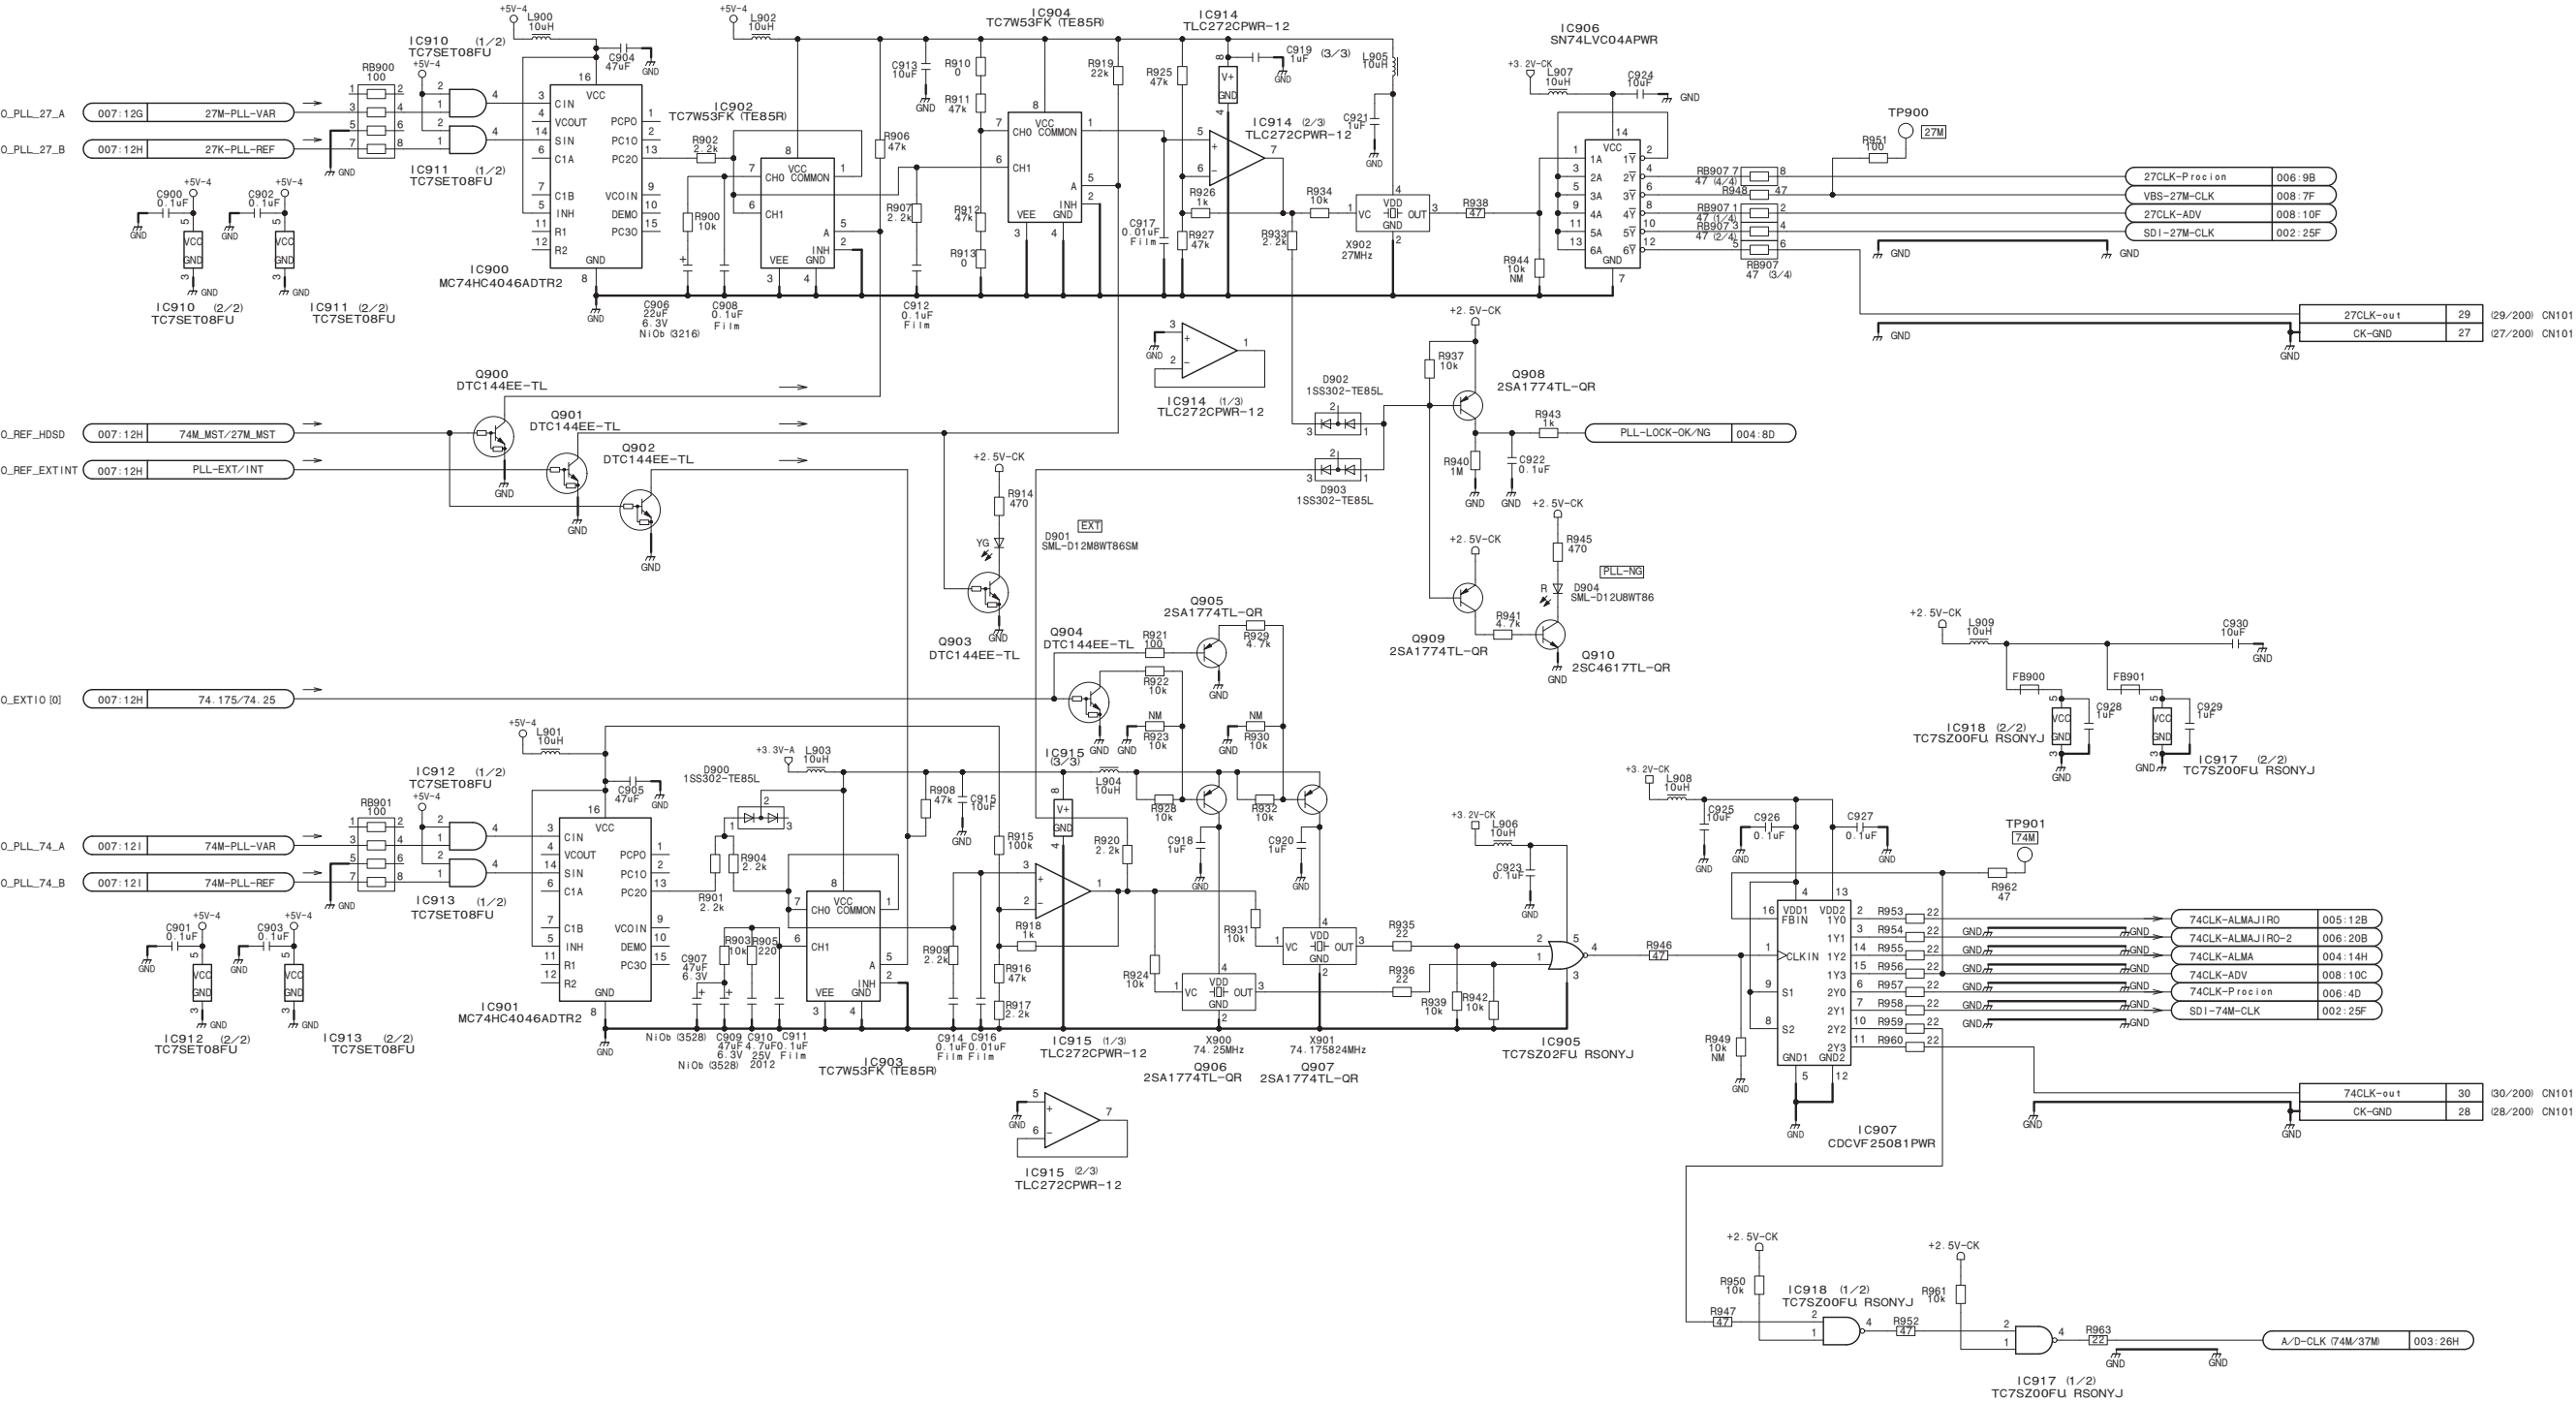


DPR-358 (9/9)
BOARD NO. 1-889-425-12
DPR-358_9

DR-675
DR-675_L

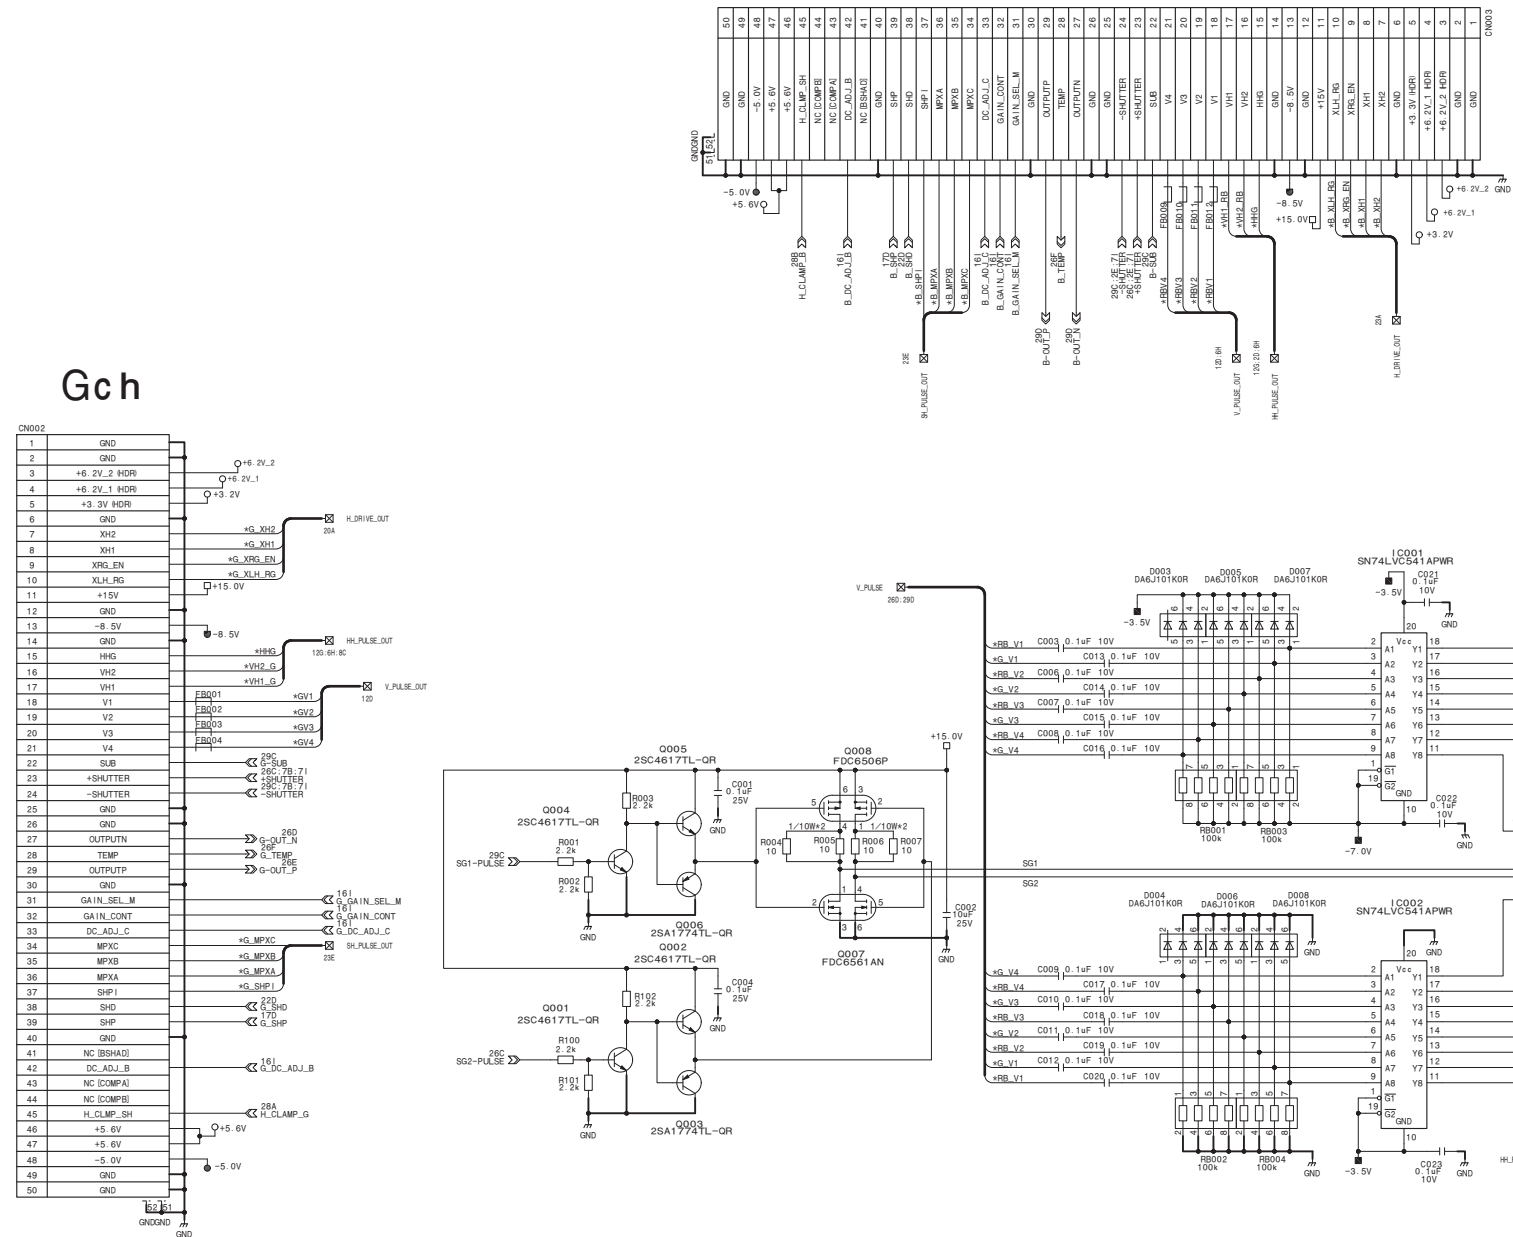


Bch

Gch

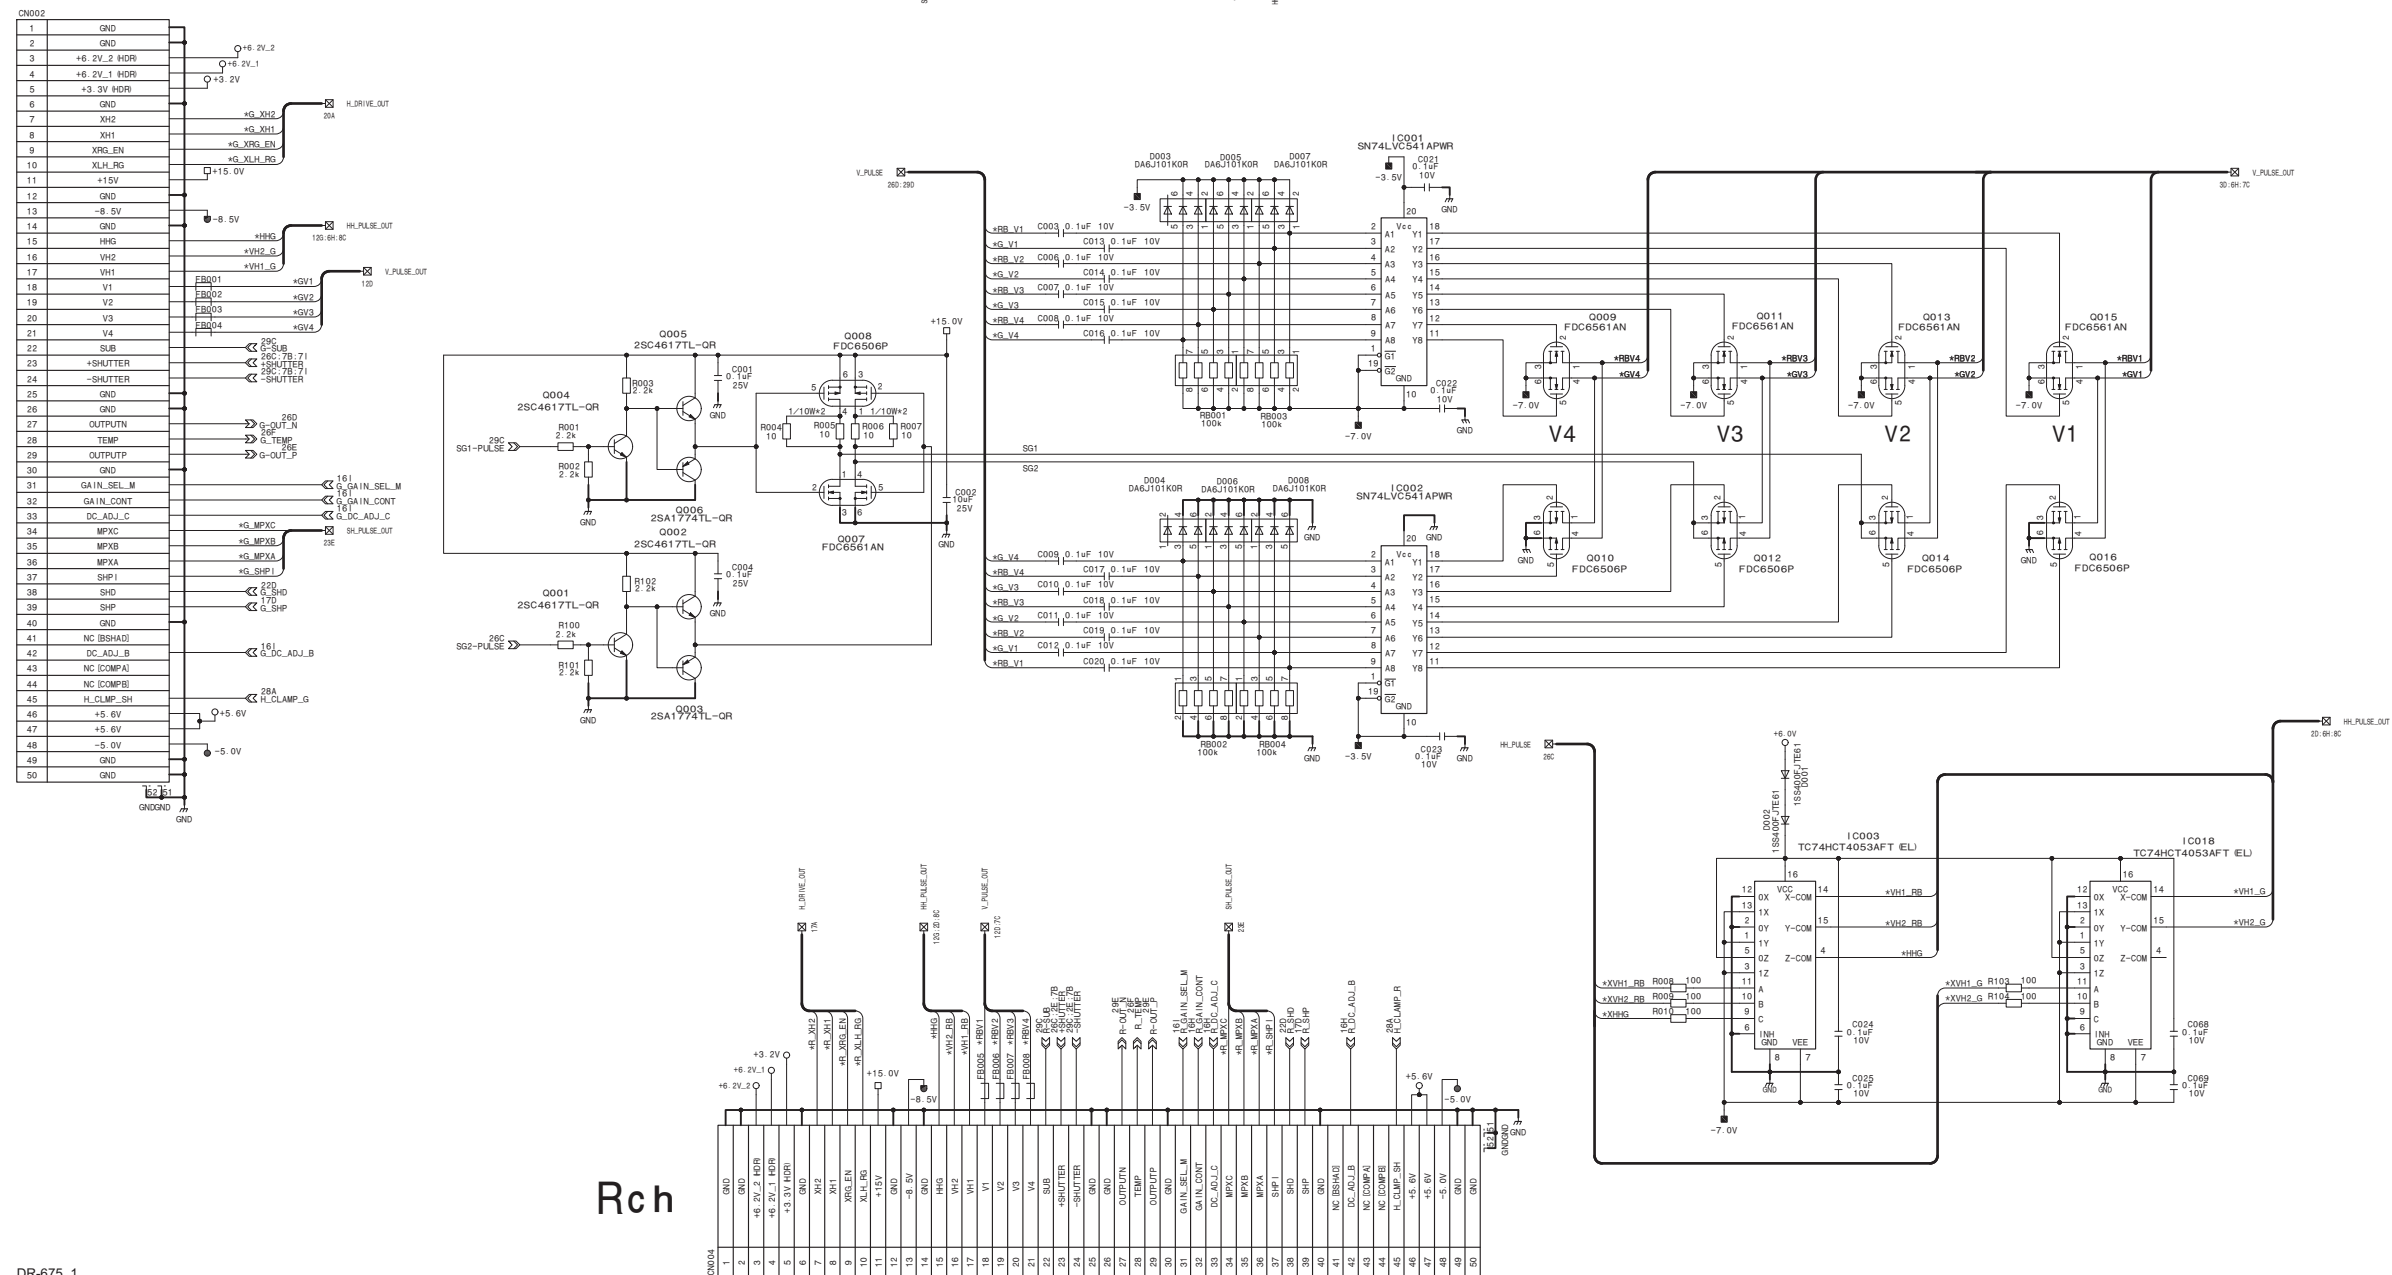


Rch


Rch_H-Dr

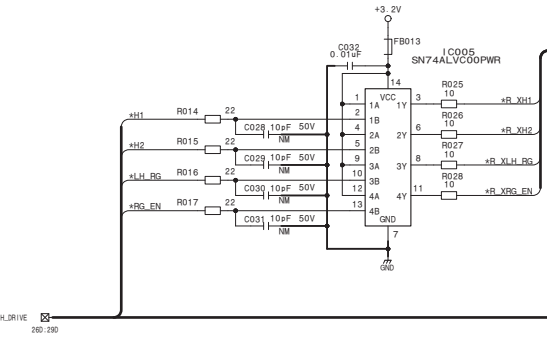


Gch_H-Dr

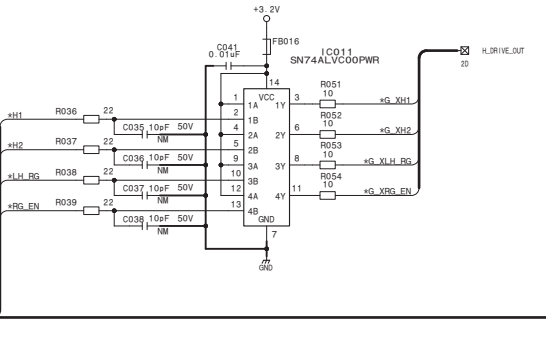


Bch_H-Dr

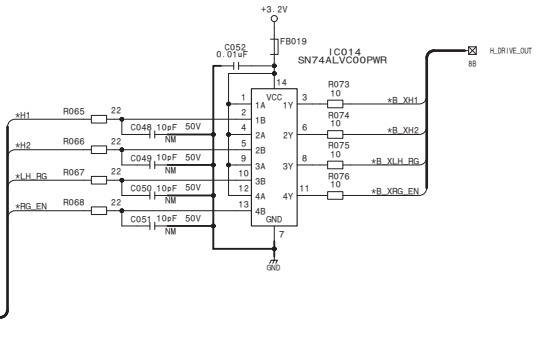


HCLAMP_SH

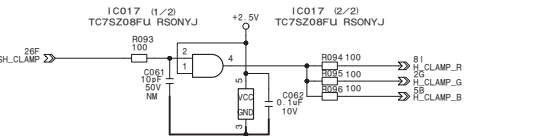


SHP

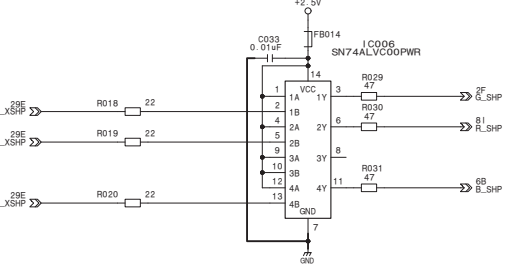


SHD

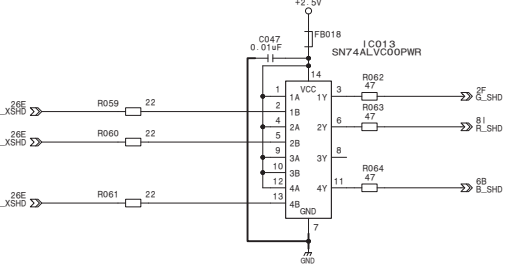


Rch_S/H

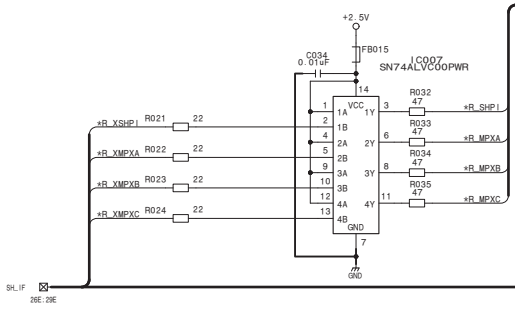


Gch_S/H

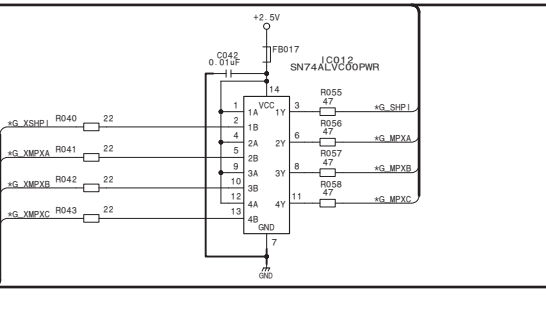


Bch_S/H

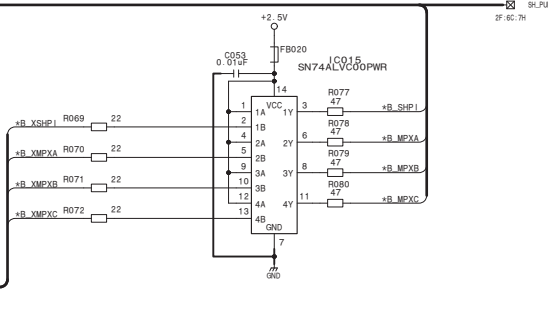


From/To TG

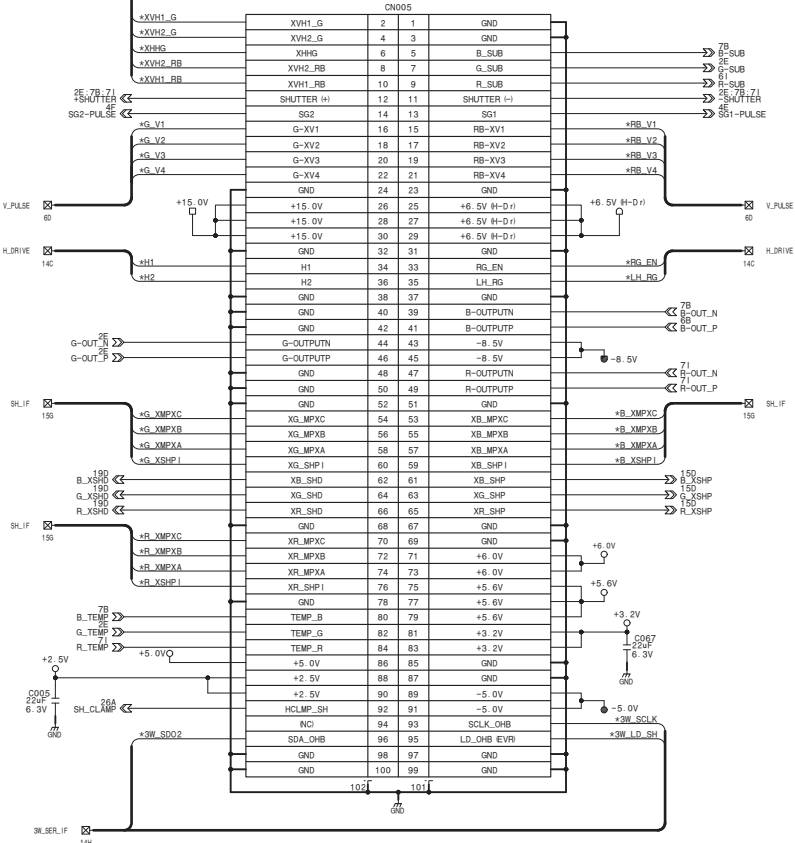


+6. 5V->+6. 2V_1 [H1/H2]

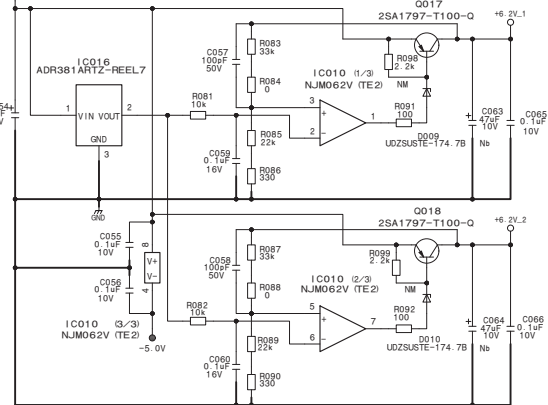

-8. 5V->-7. 0V



-7. 0V->-3. 5V




+6. 5V->+6. 2V_2 [LH/RG]



DR-675

BOARD NO. 1-889-422-11
DR-675_1


FL-377

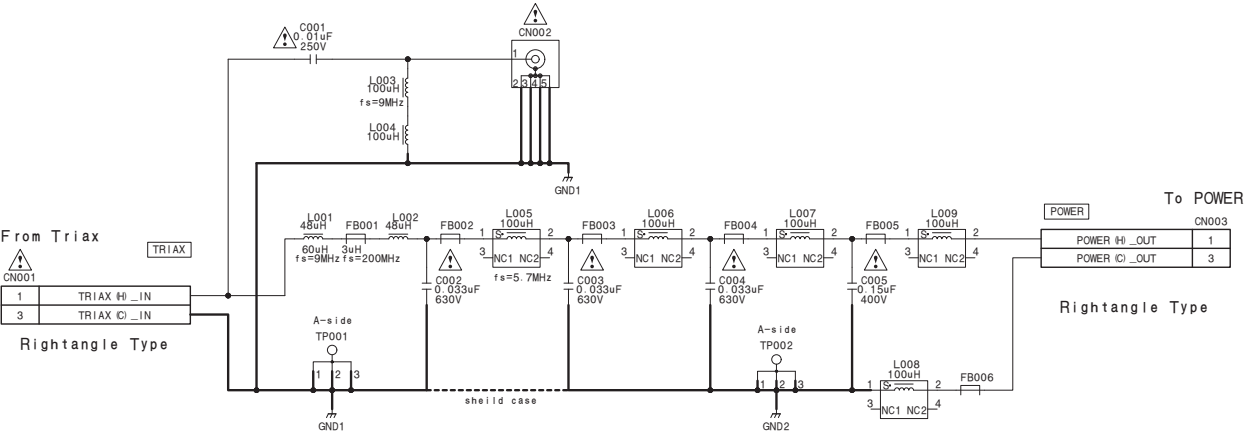

FL-377

BOARD NO. 1-889-428-11
FL-377_1

LE-392

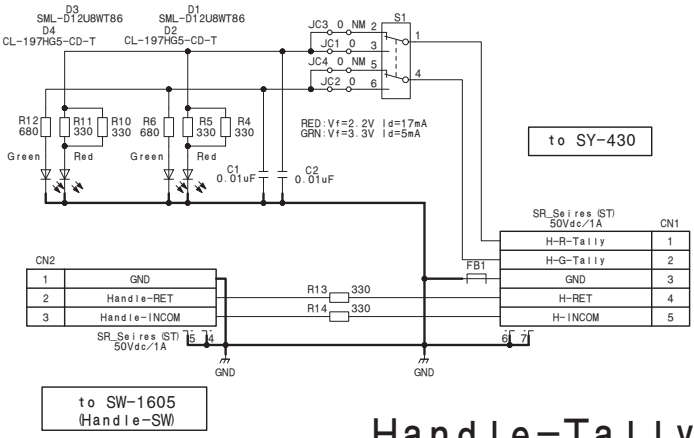


Handle-Tally


LE-392

BOARD NO. 1-888-851-11
LE-392_1

MB-1207

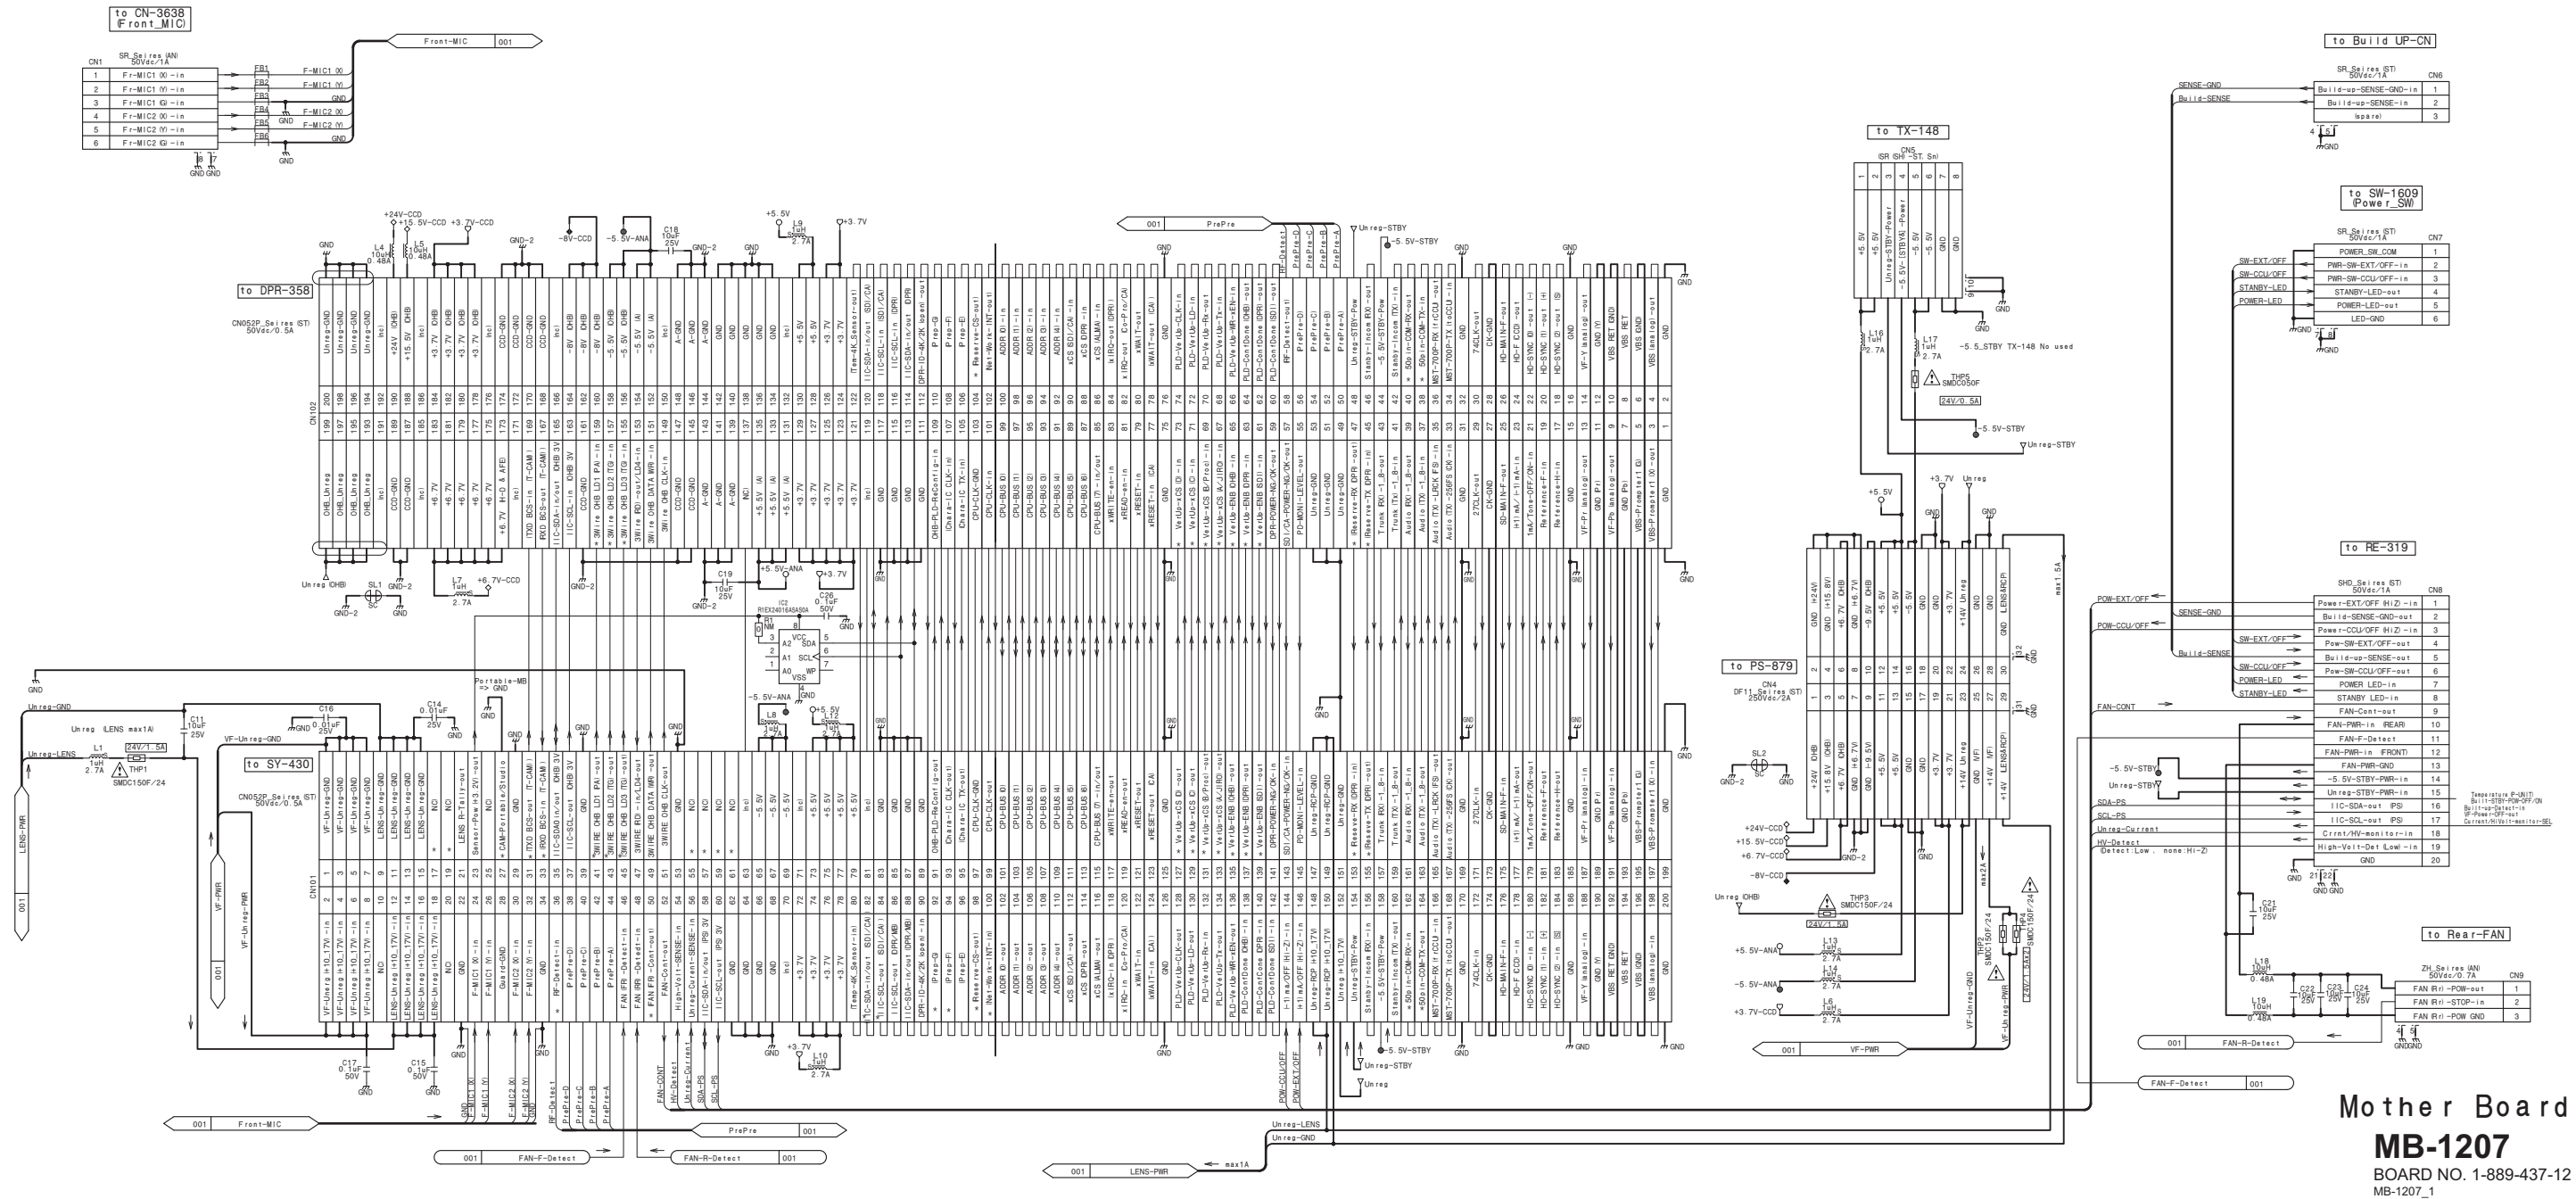


PA-418

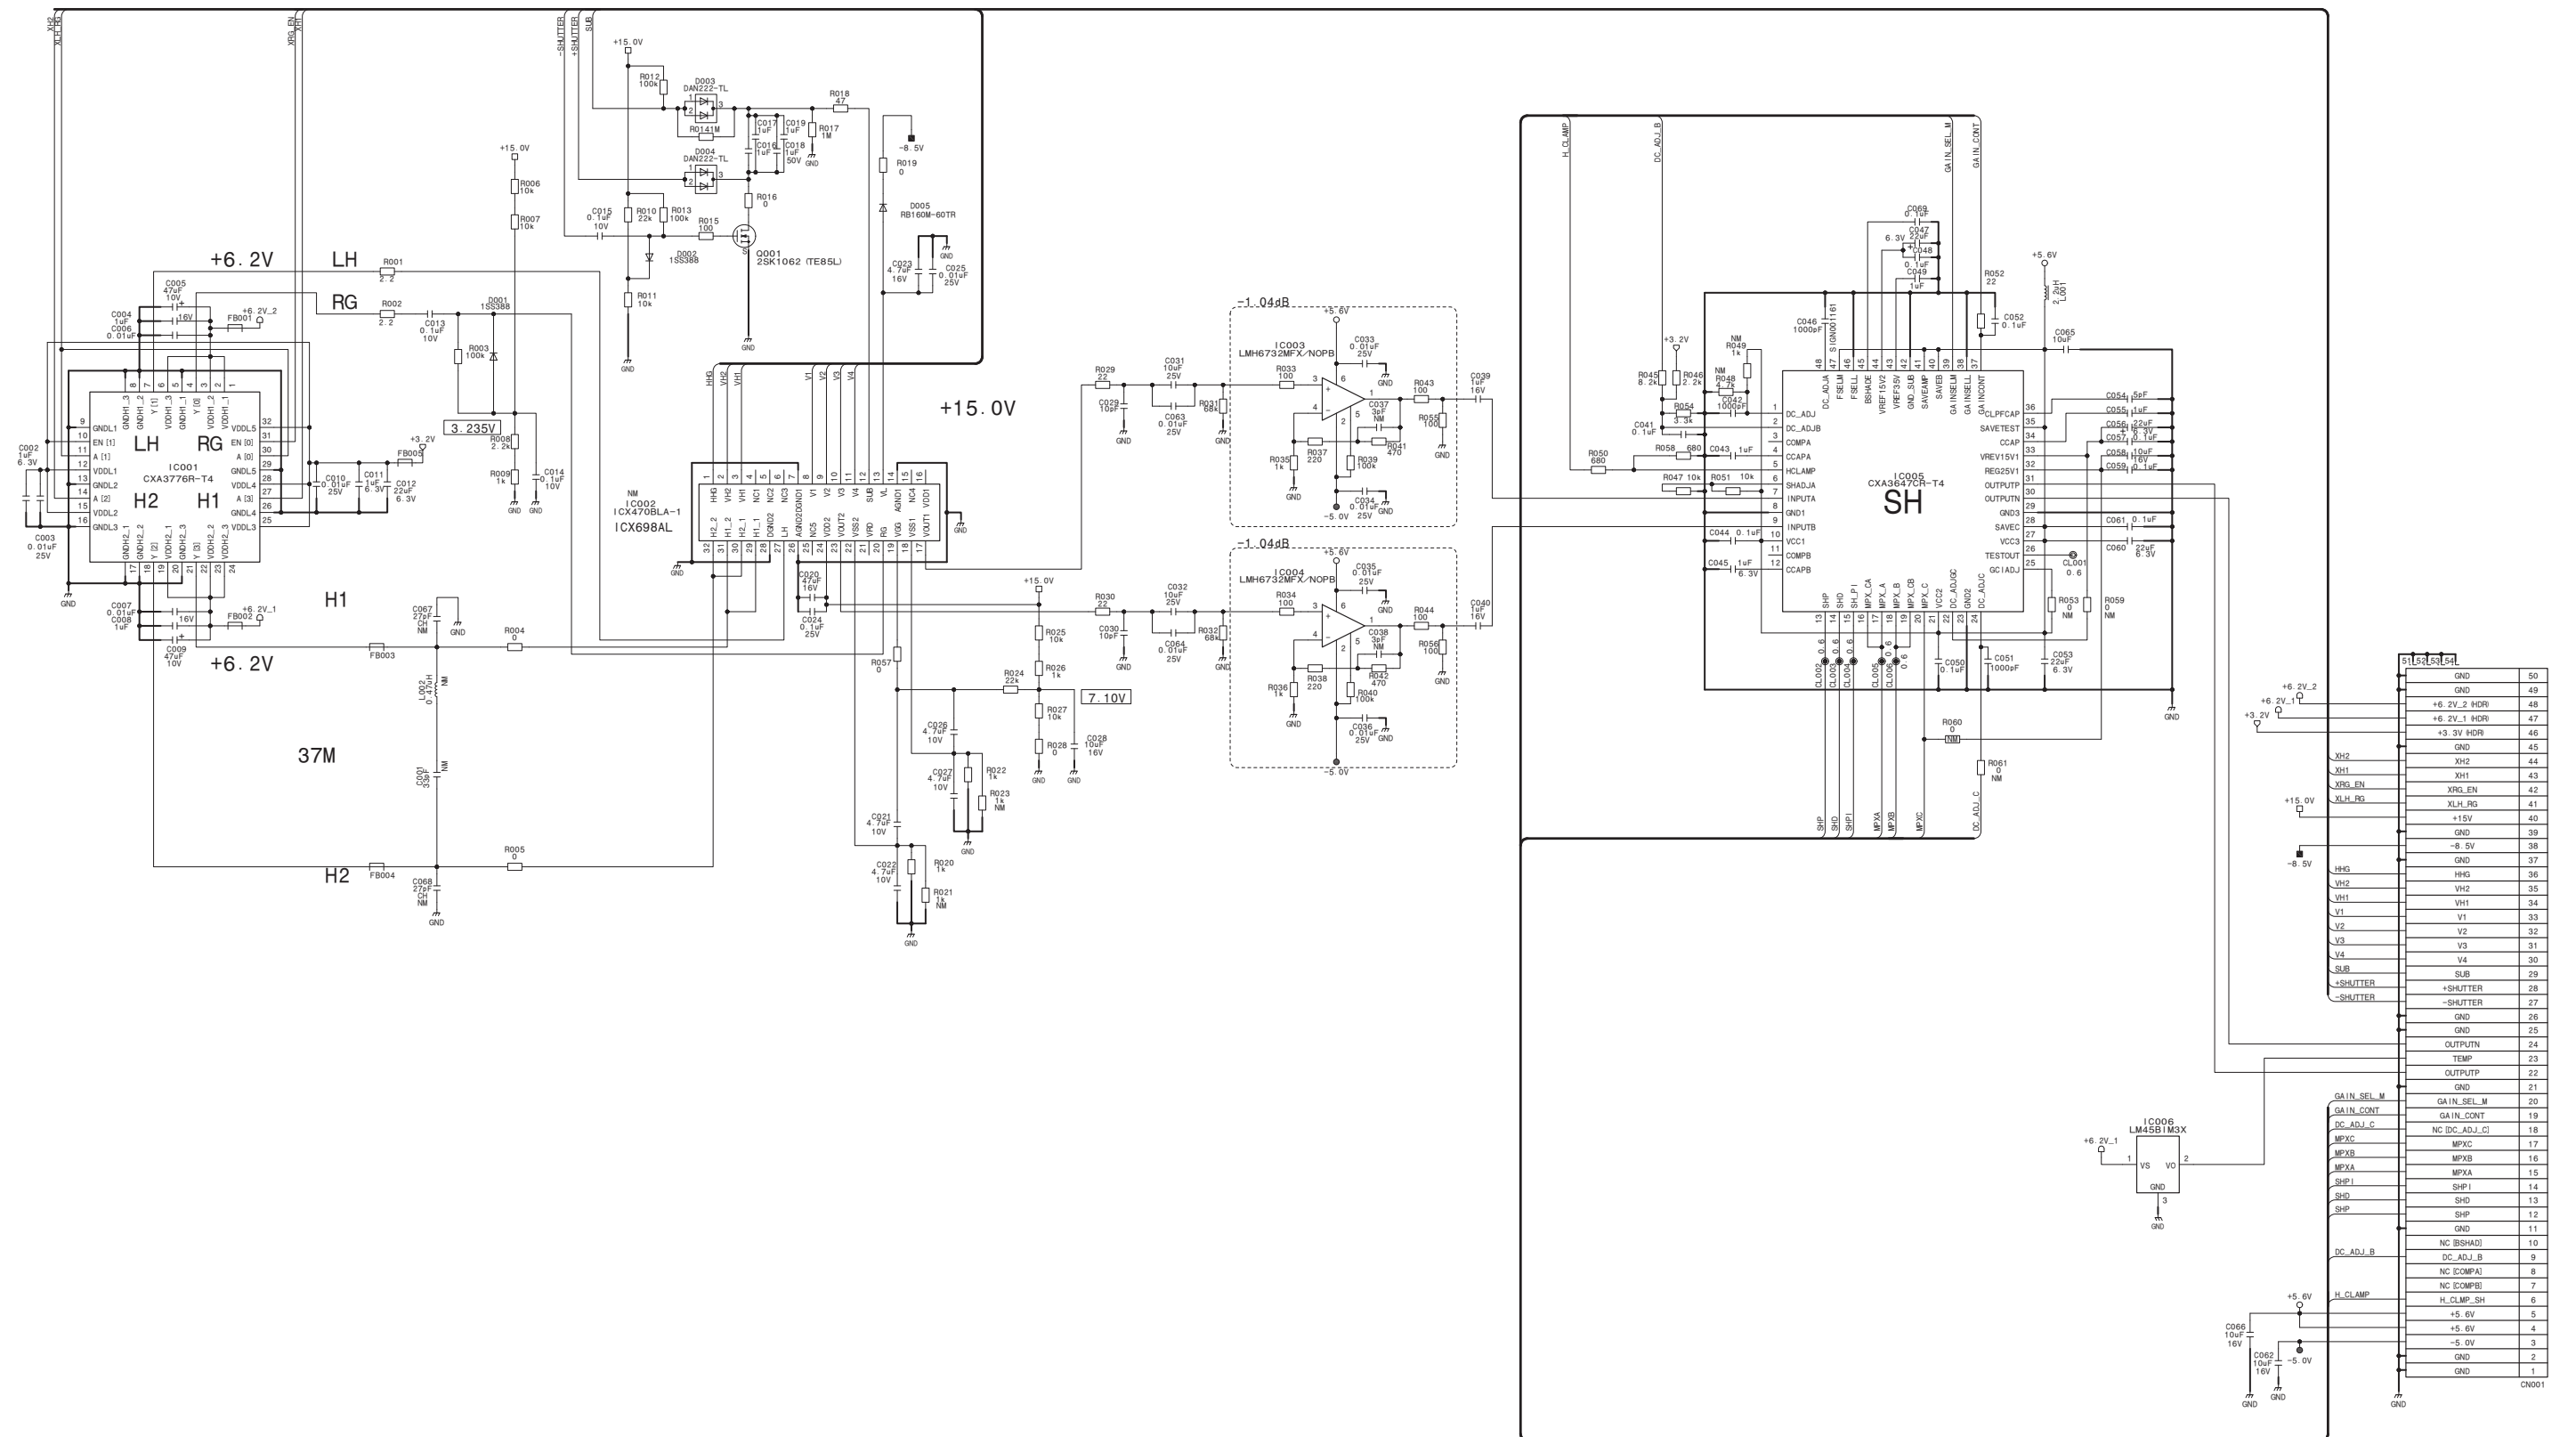


For ICX698ALA [IT]

PA-418
BOARD NO. 1-889-421-11
PA-418_1

PS-879
PS-879 (1/5)

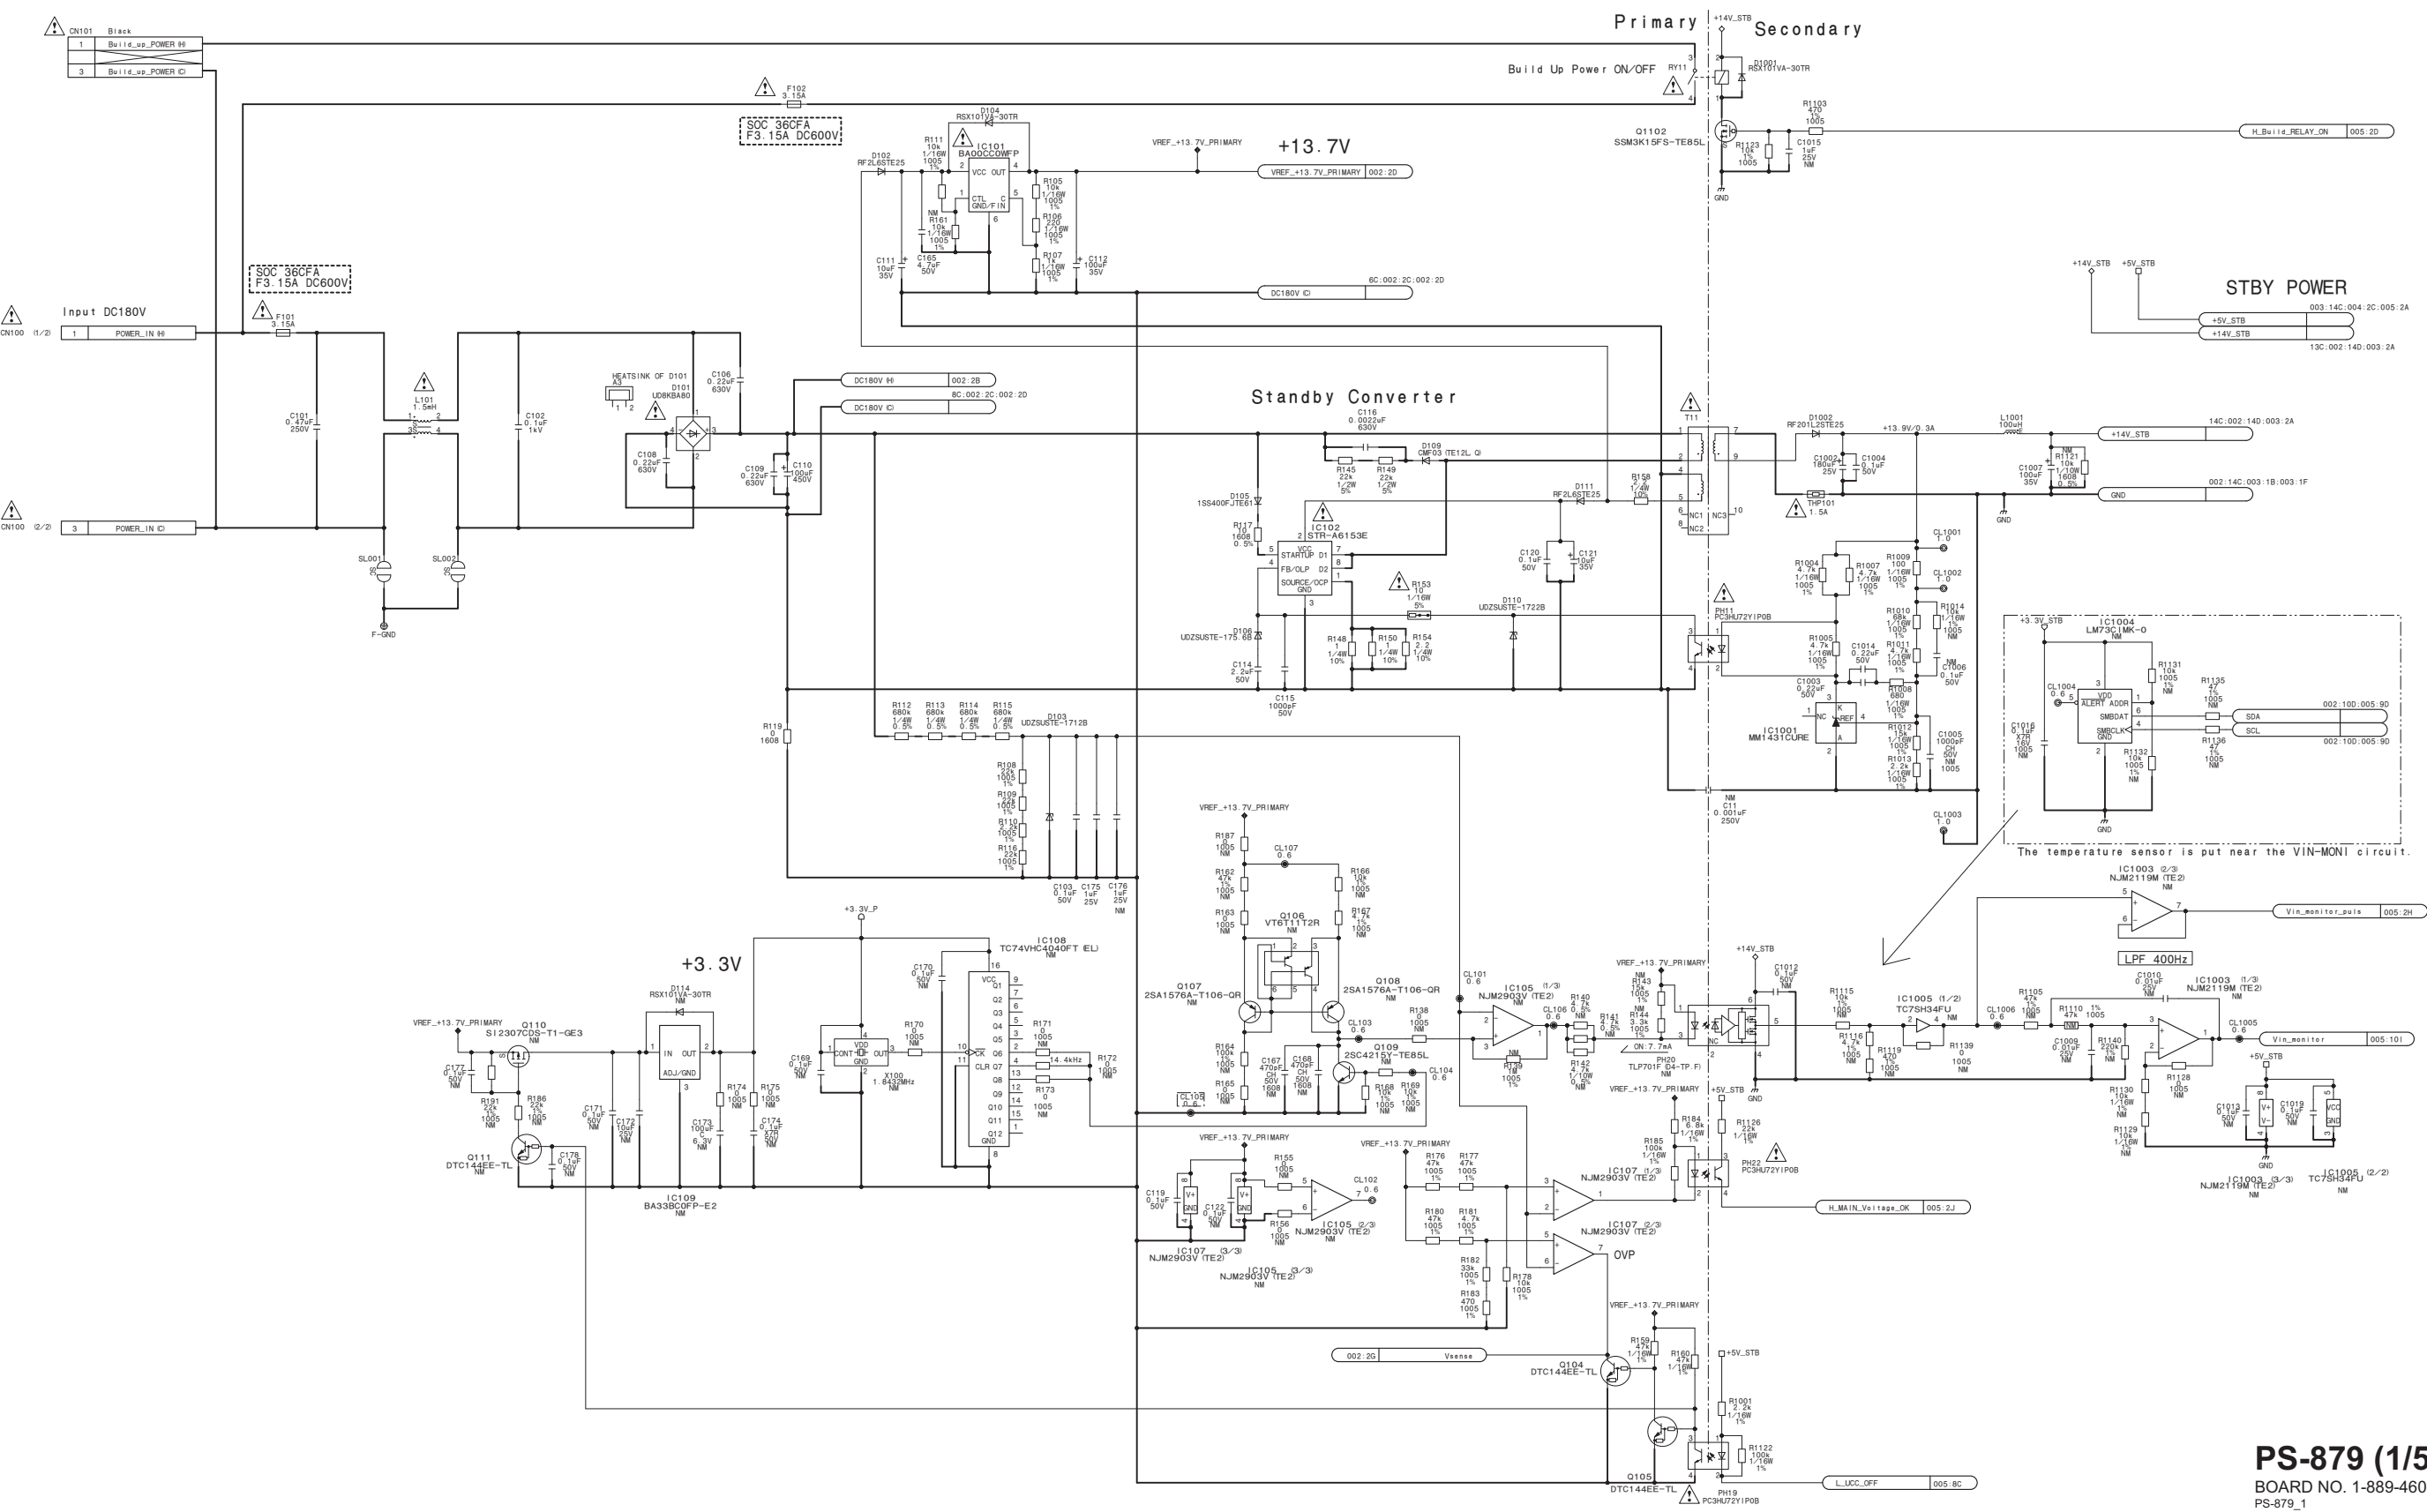


PS-879 (2/5)

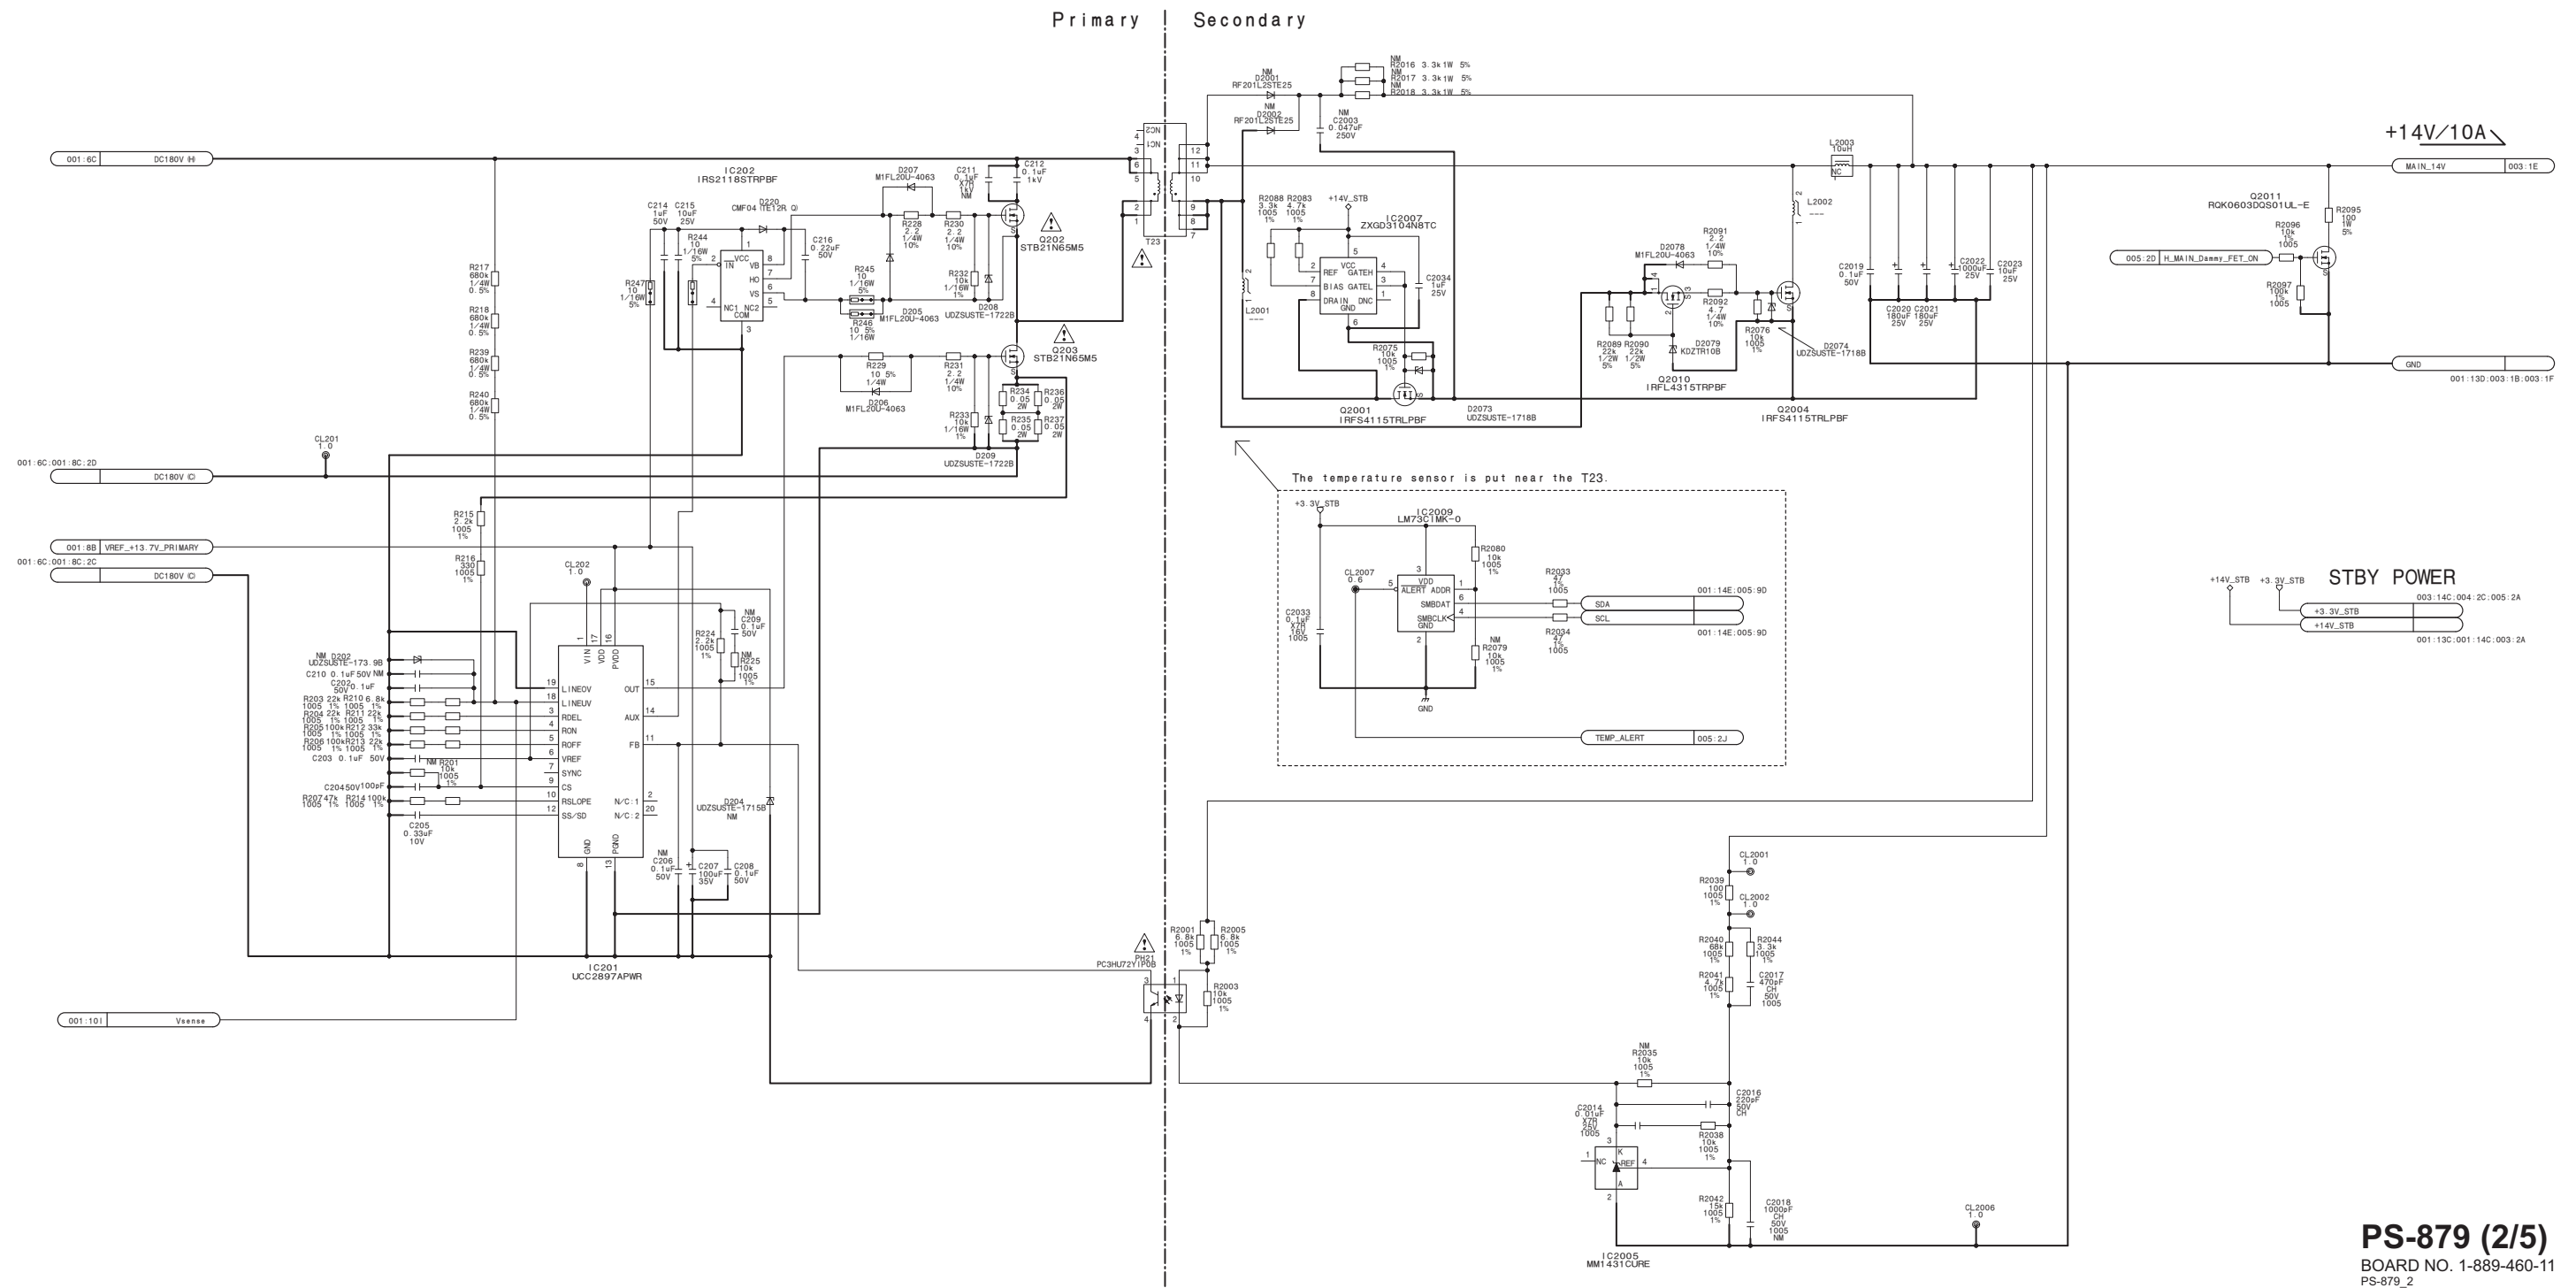

PS-879 (2/5)
BOARD NO. 1-889-460-11
PS-879_2


PS-879 (3/5)

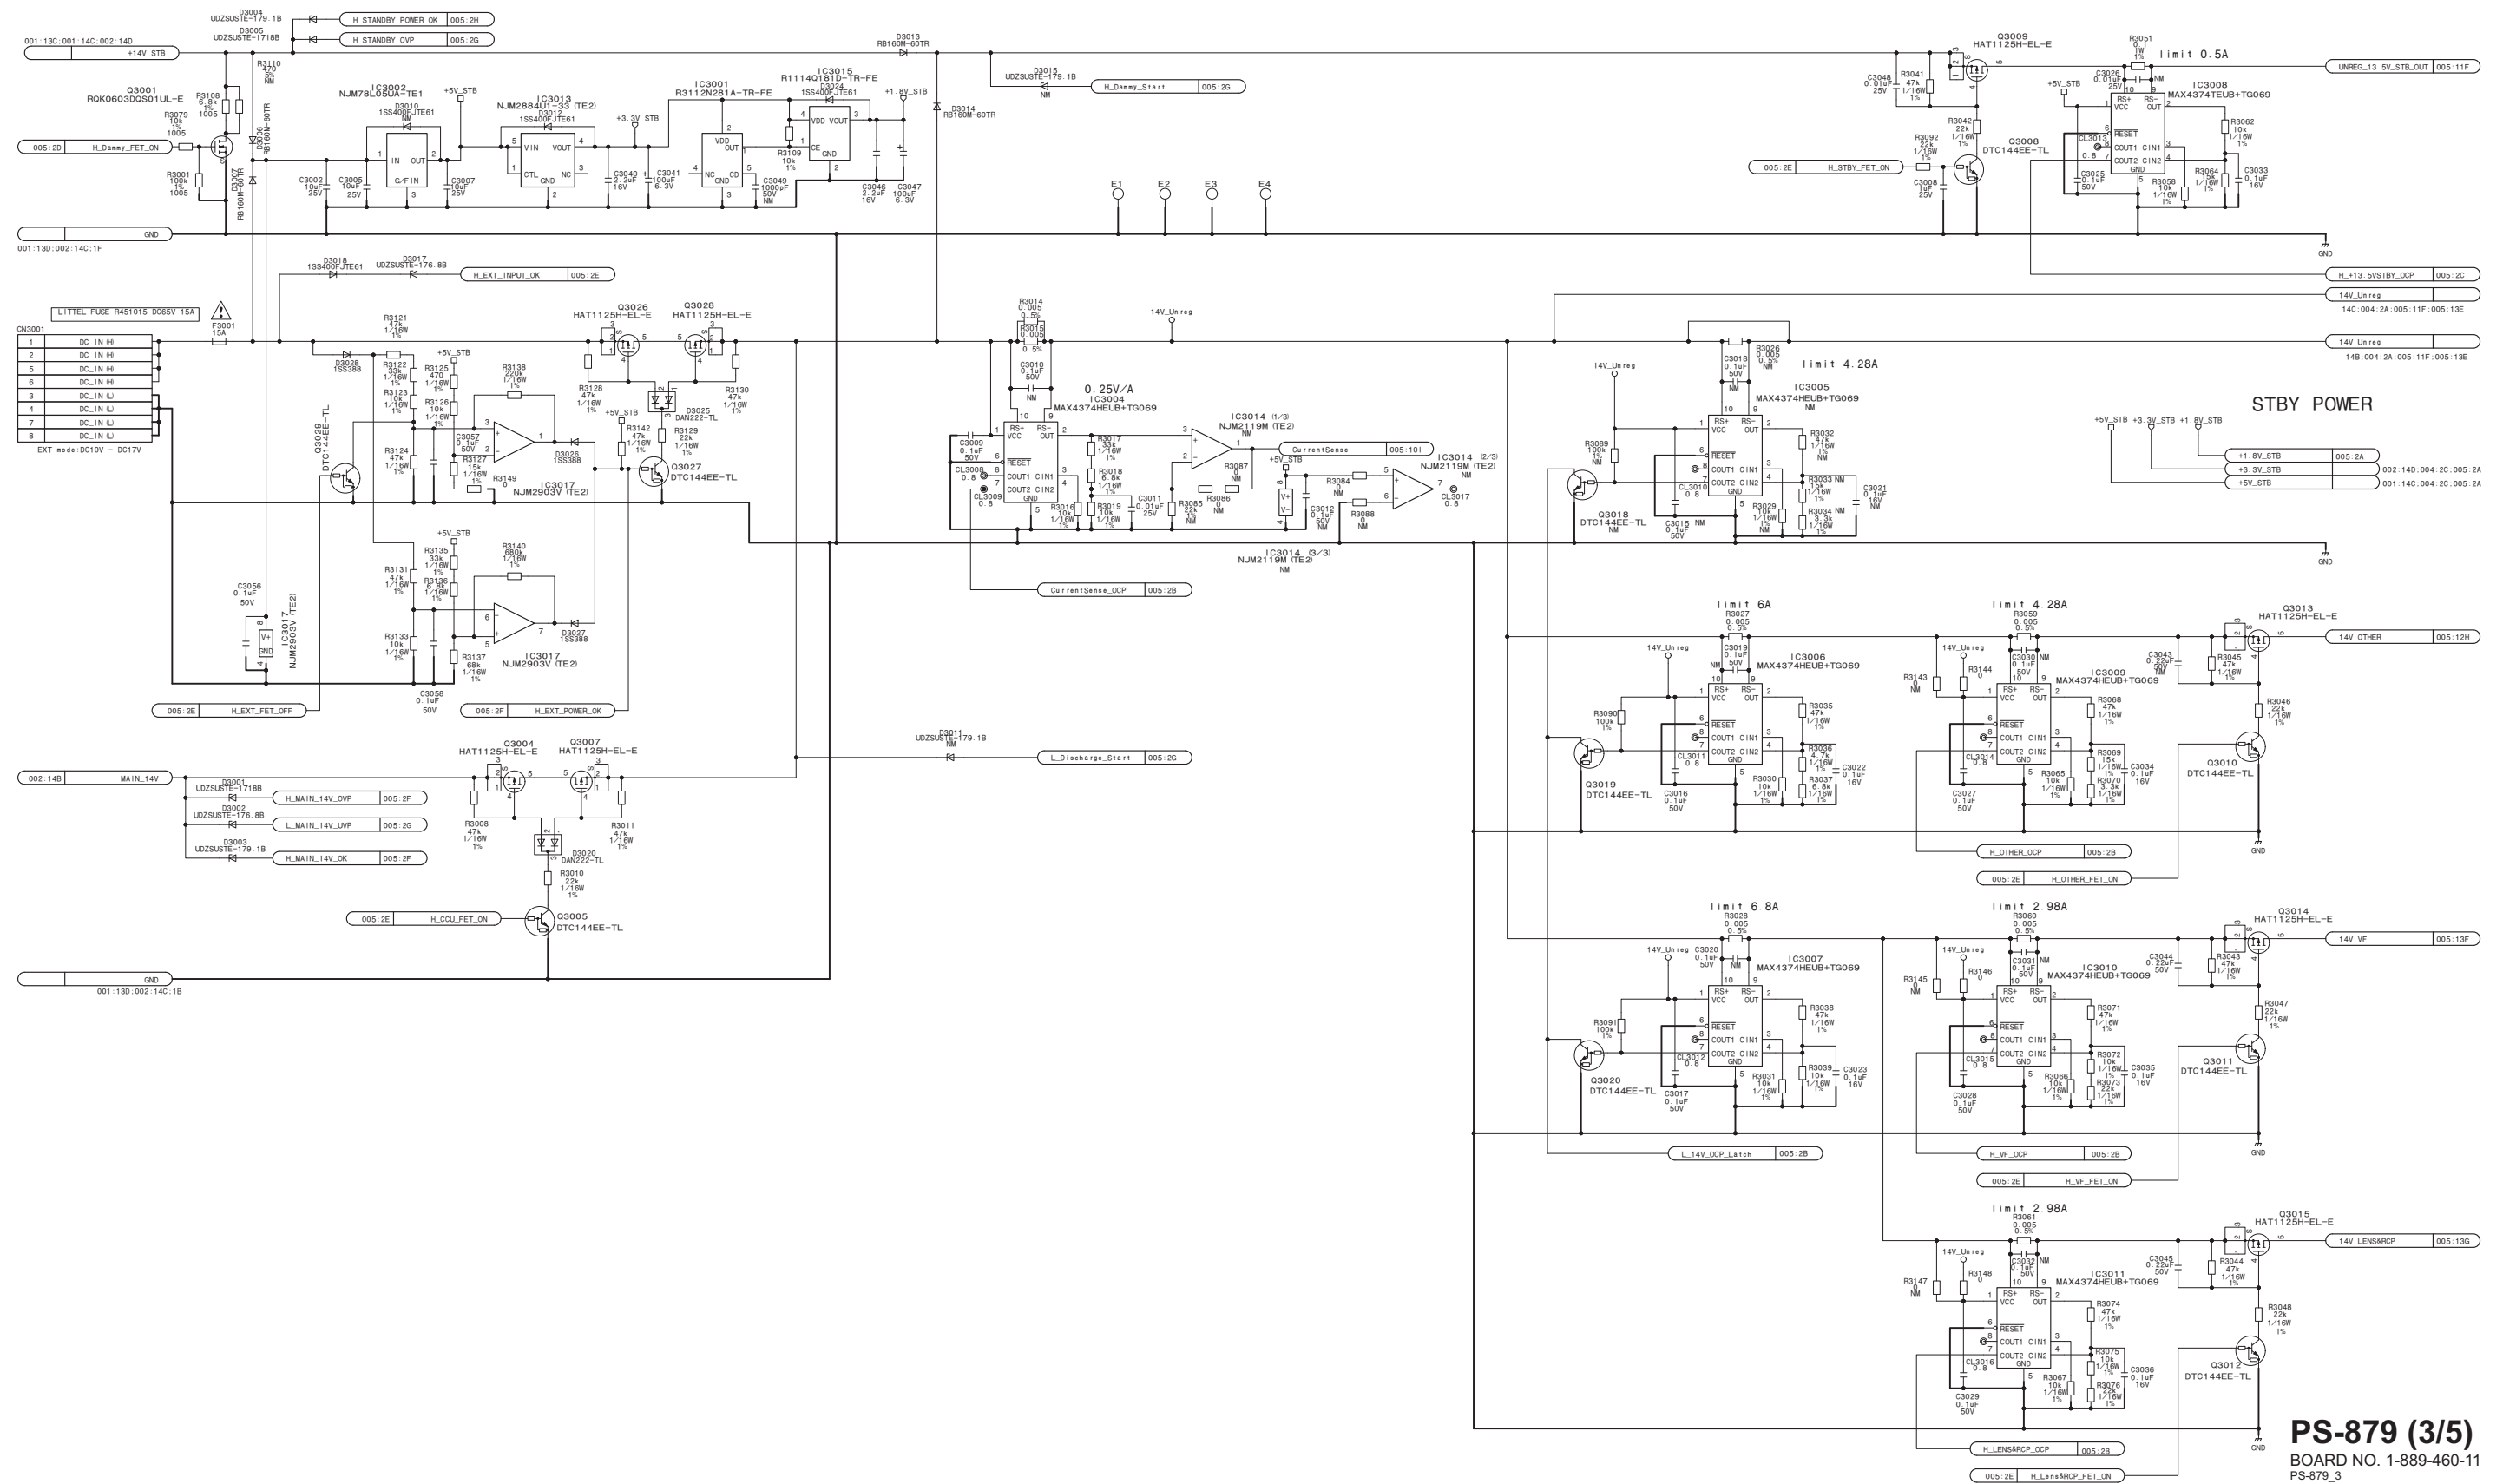

PS-879 (3/5)
BOARD NO. 1-889-460-11
PS-879_3


PS-879 (4/5)

+3.3V & +5.5V

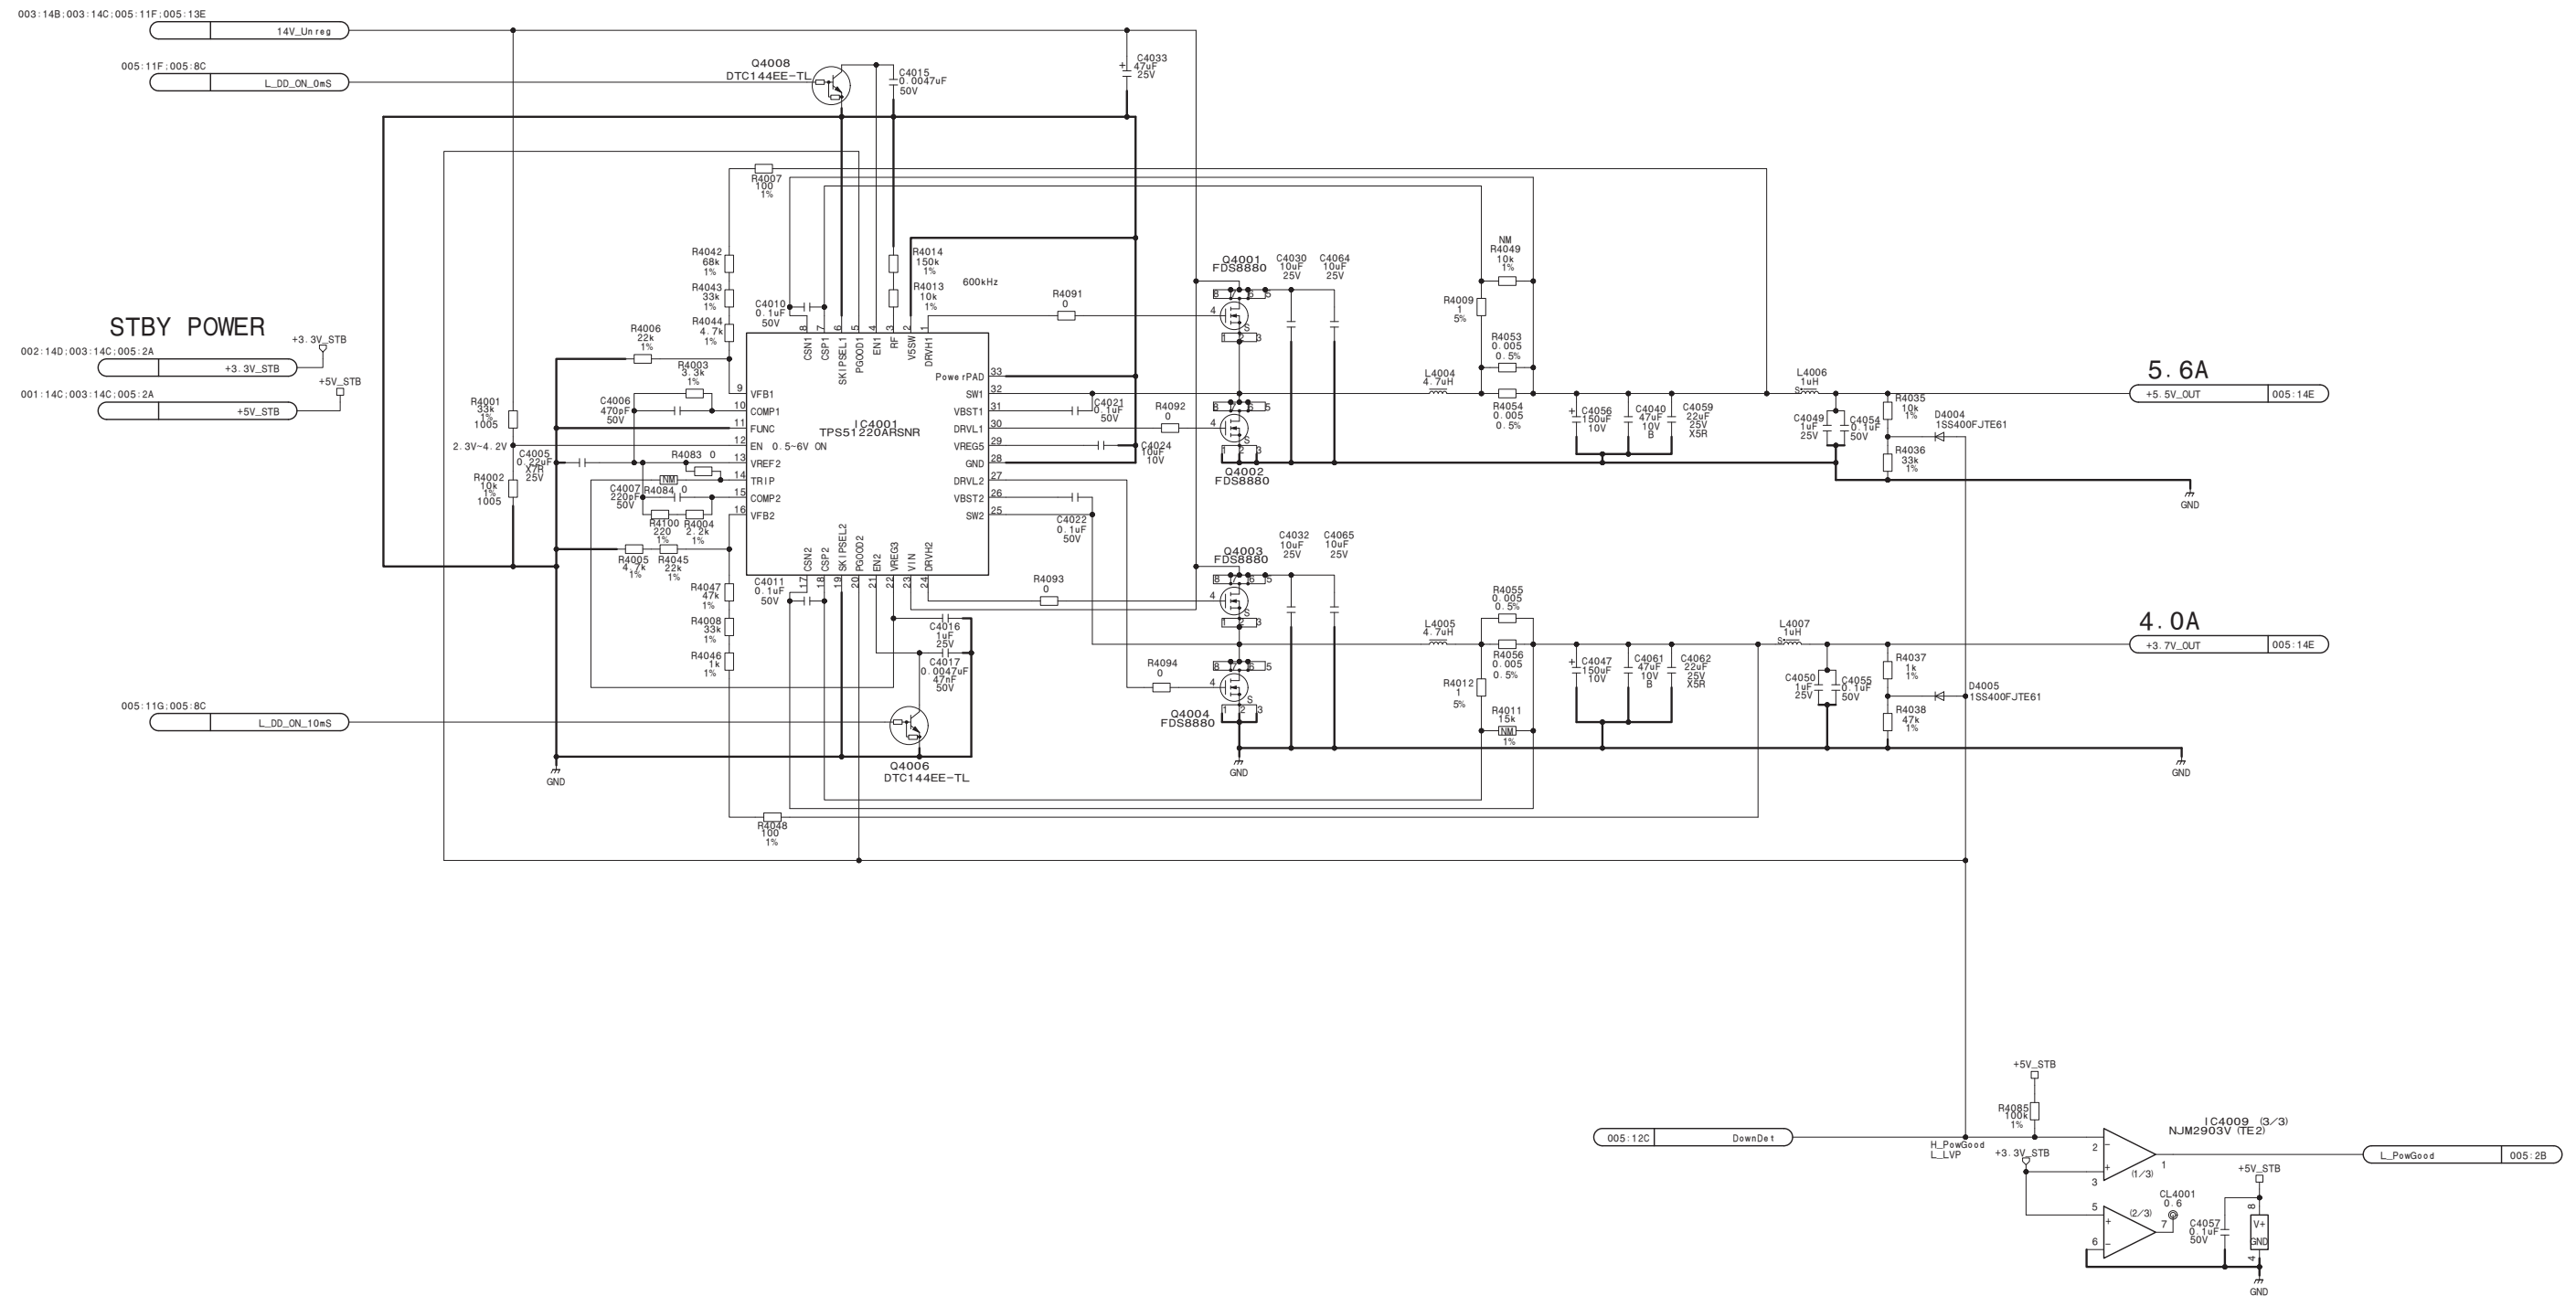



PS-879 (4/5)
BOARD NO. 1-889-460-11
PS-879_4

PS-879 (5/5)

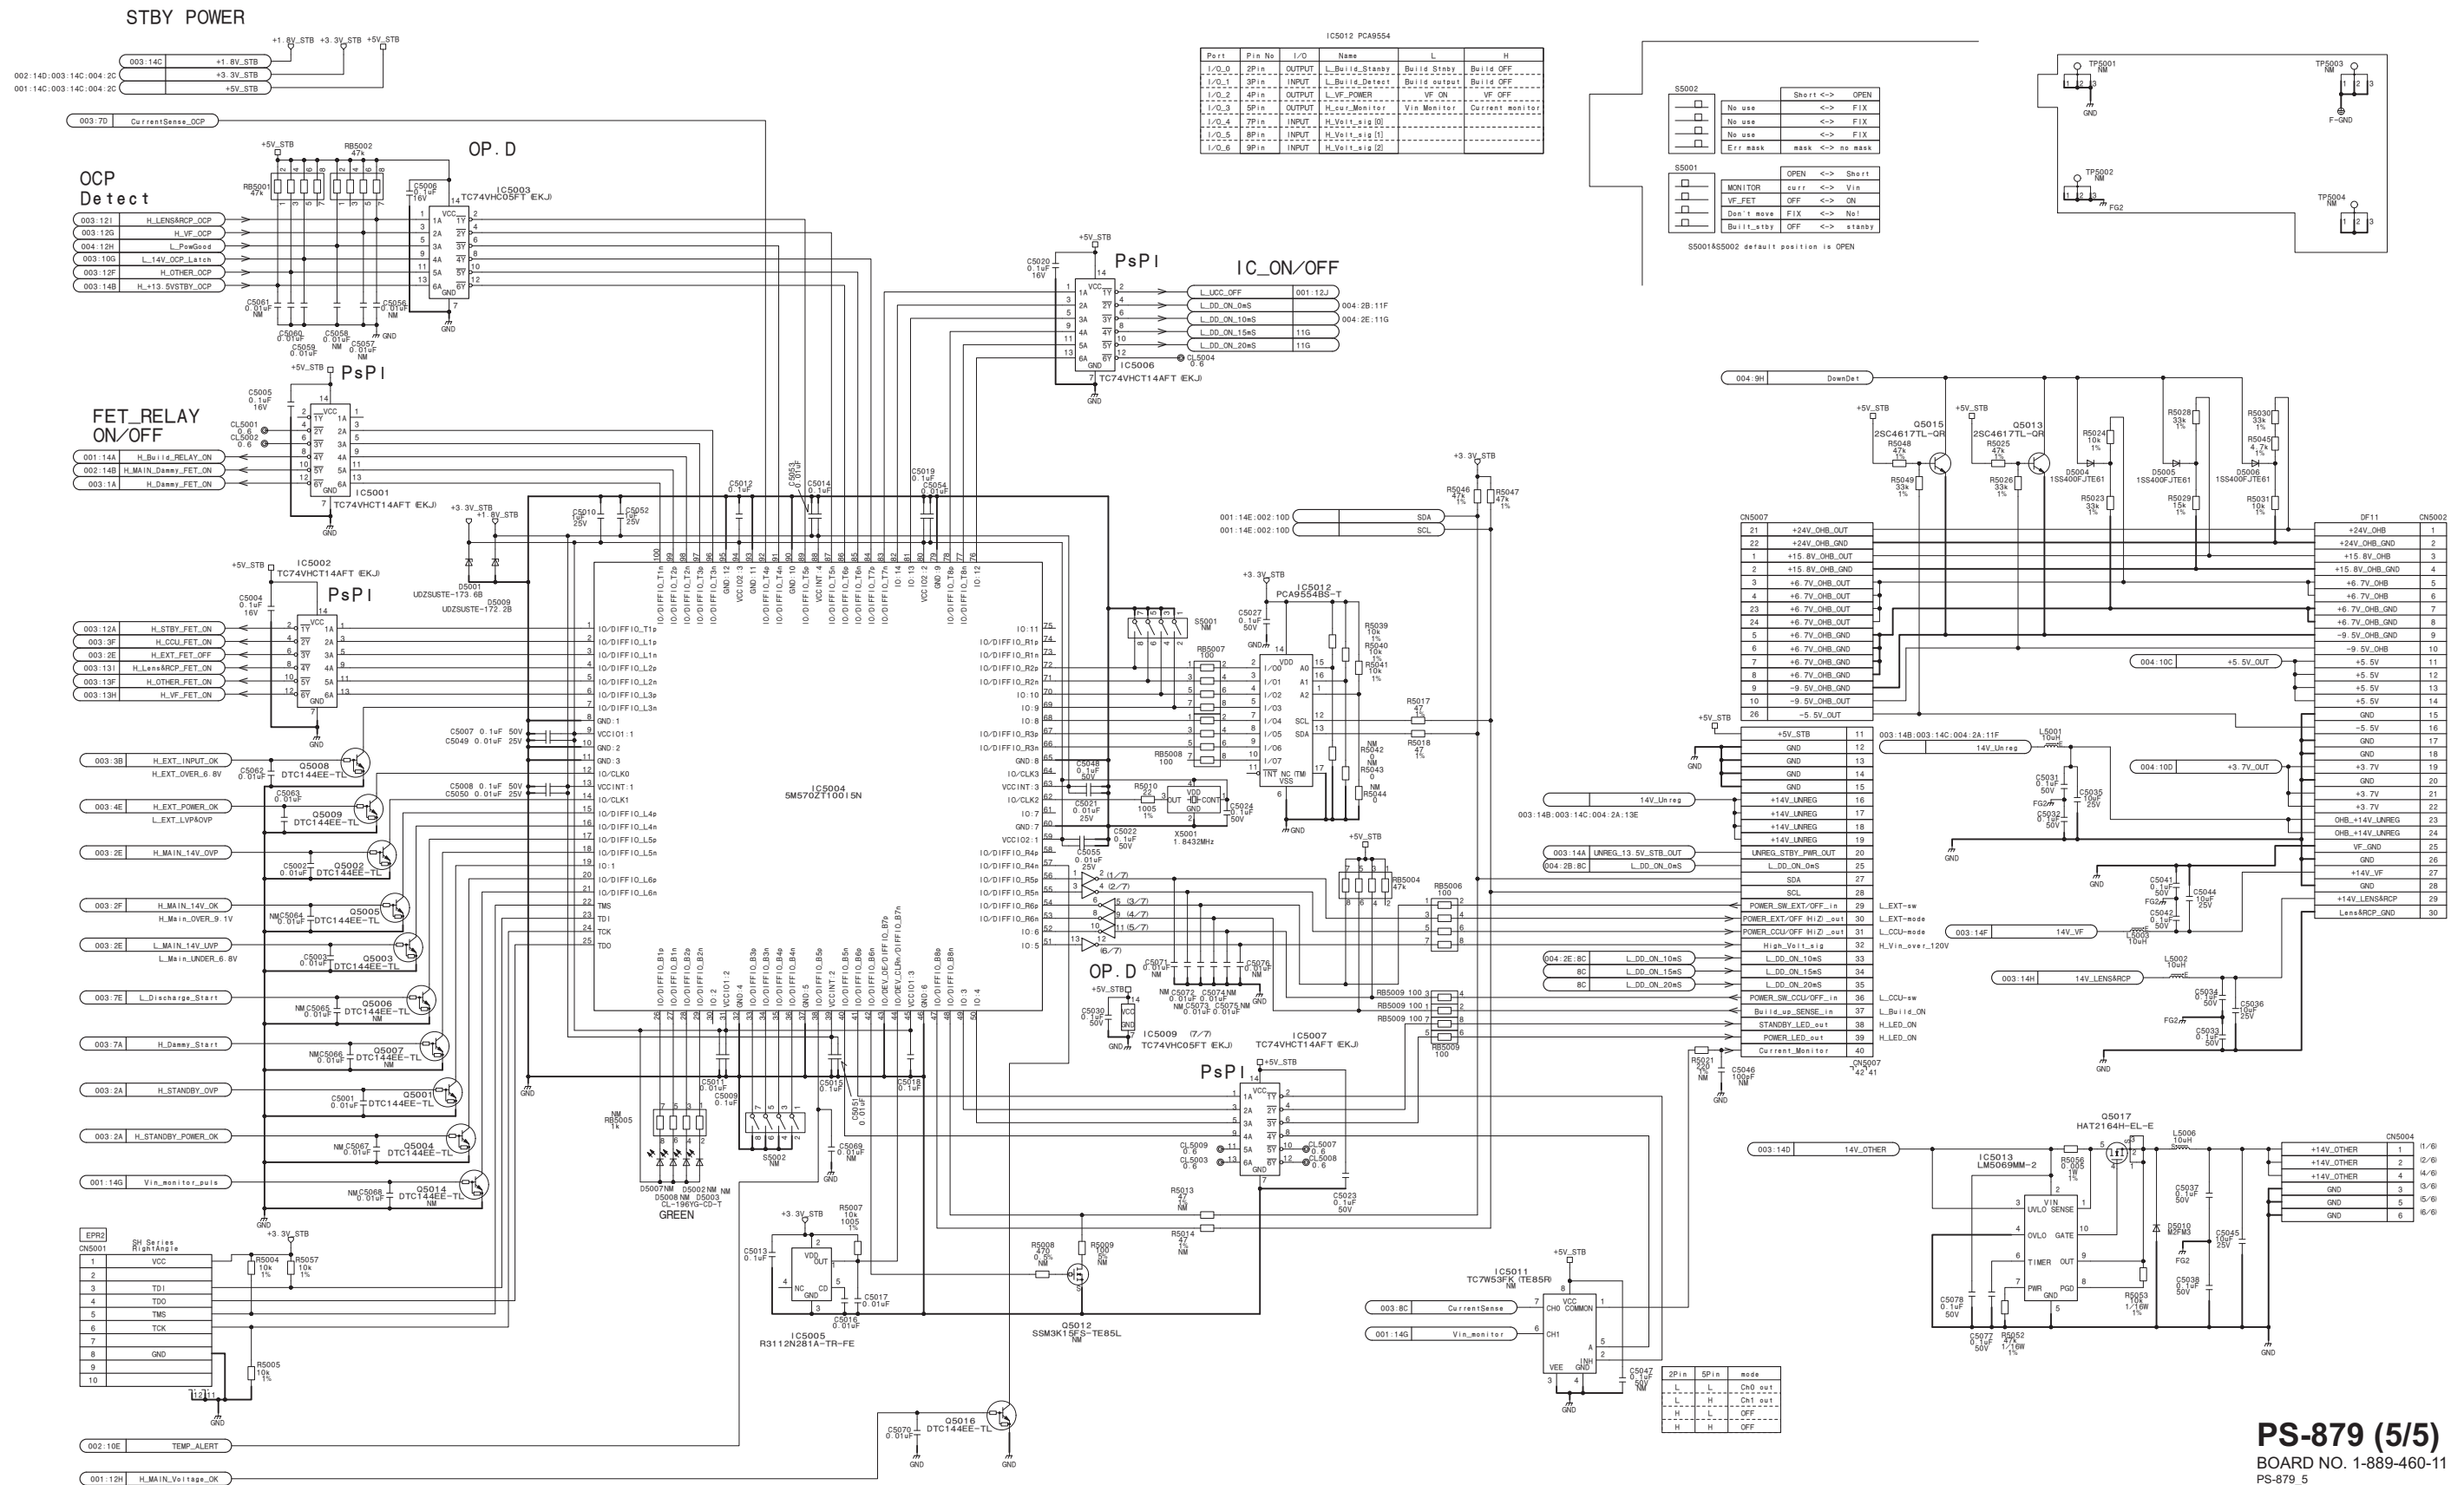









RE-319

+6.7V_OHB & +15.8V_OHB & +24V_OHB & -9.5V_OHB & -5.5V & -5.5V_STBY & FAN

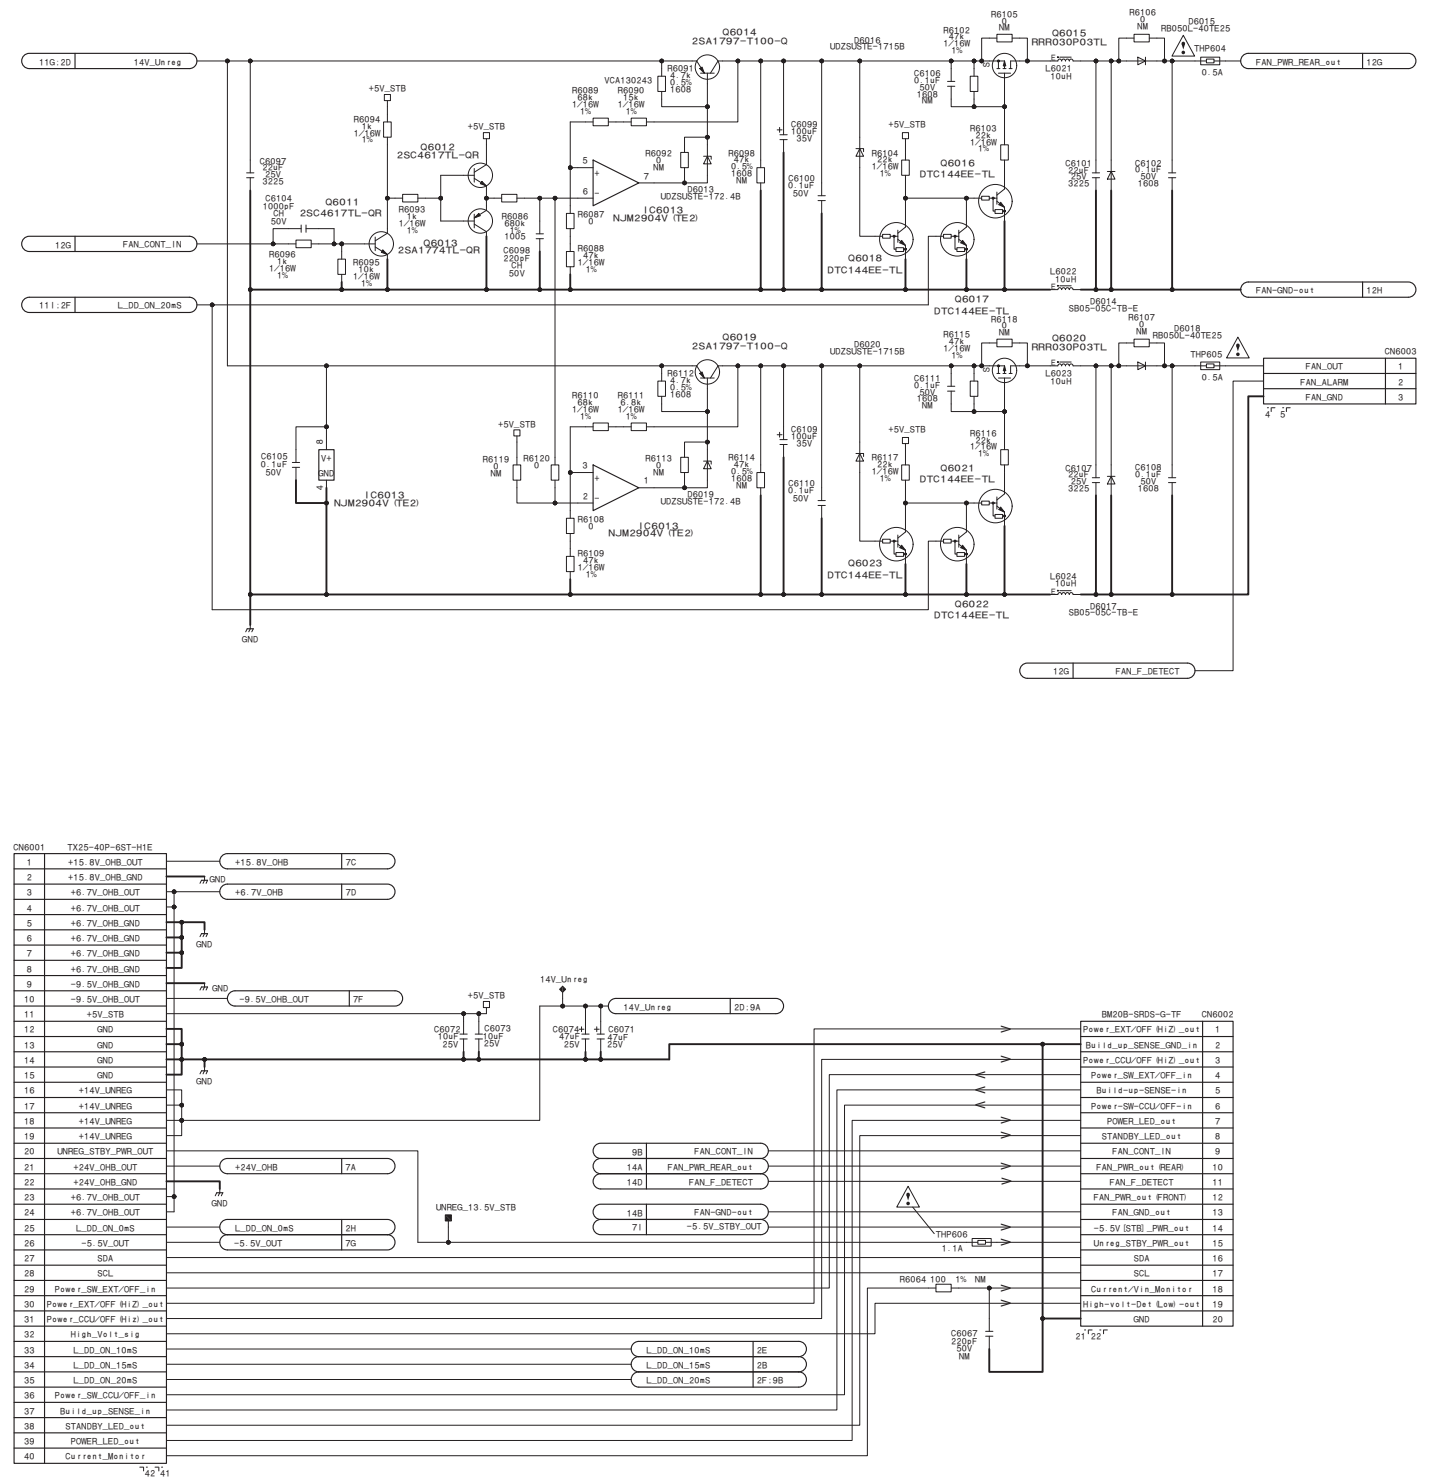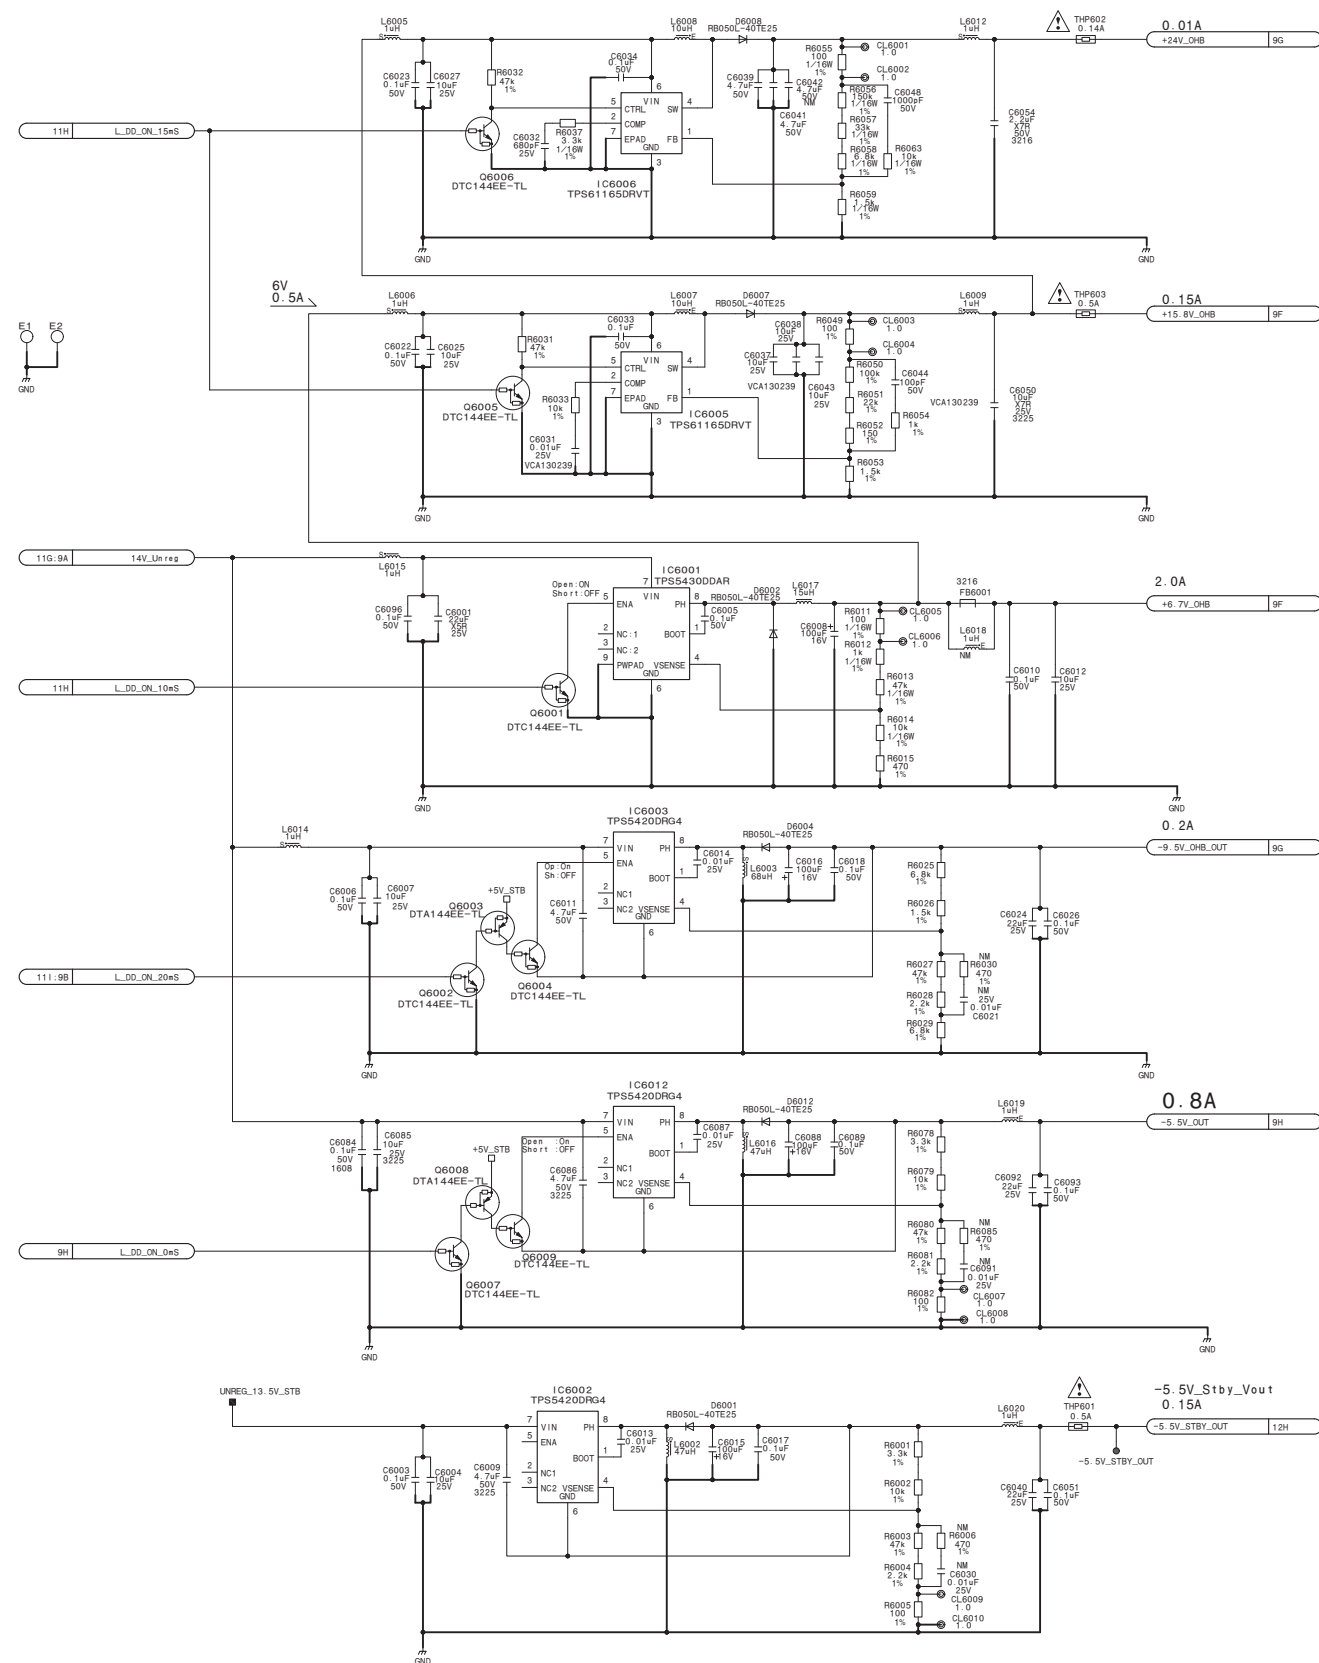


RE-319
BOARD NO. 1-889-461-11
RE-319 1

SDI-117
SDI-117 (1/5)

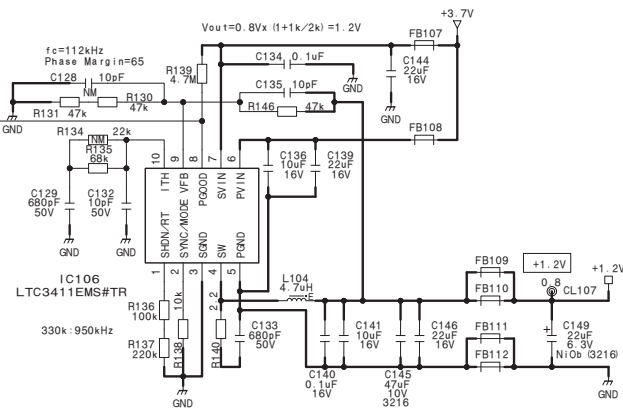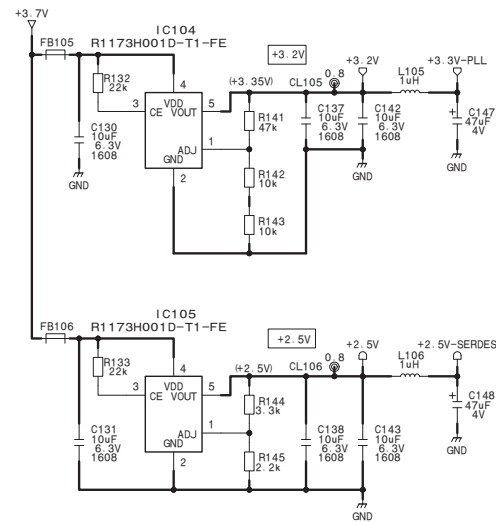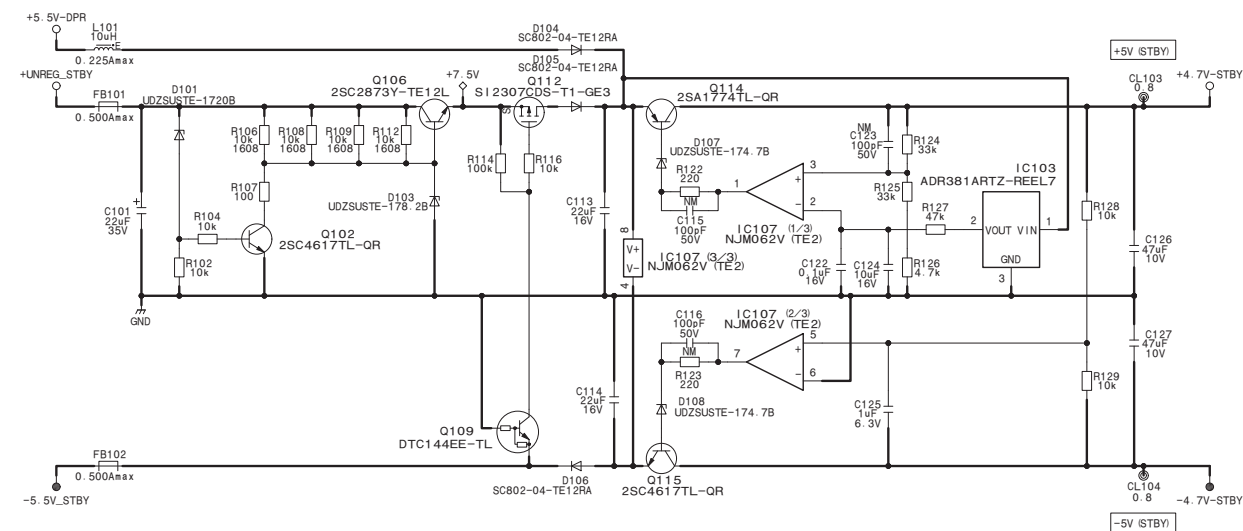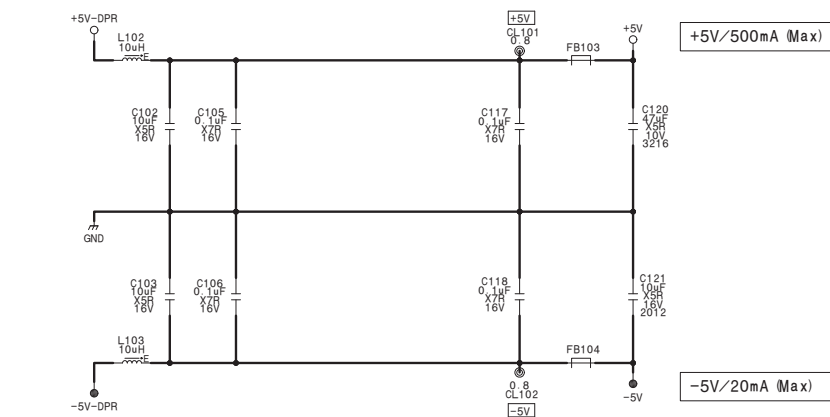
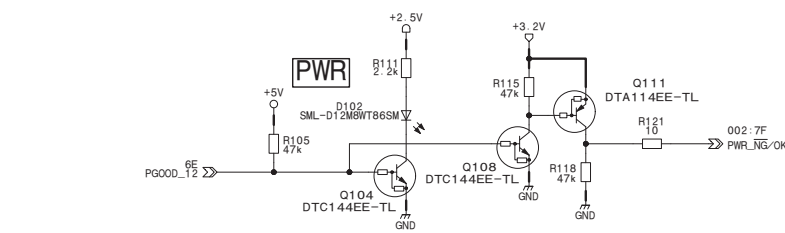


PWR

SDI-117 (1/5)
BOARD NO. 1-889-429-11
SDI-117_1

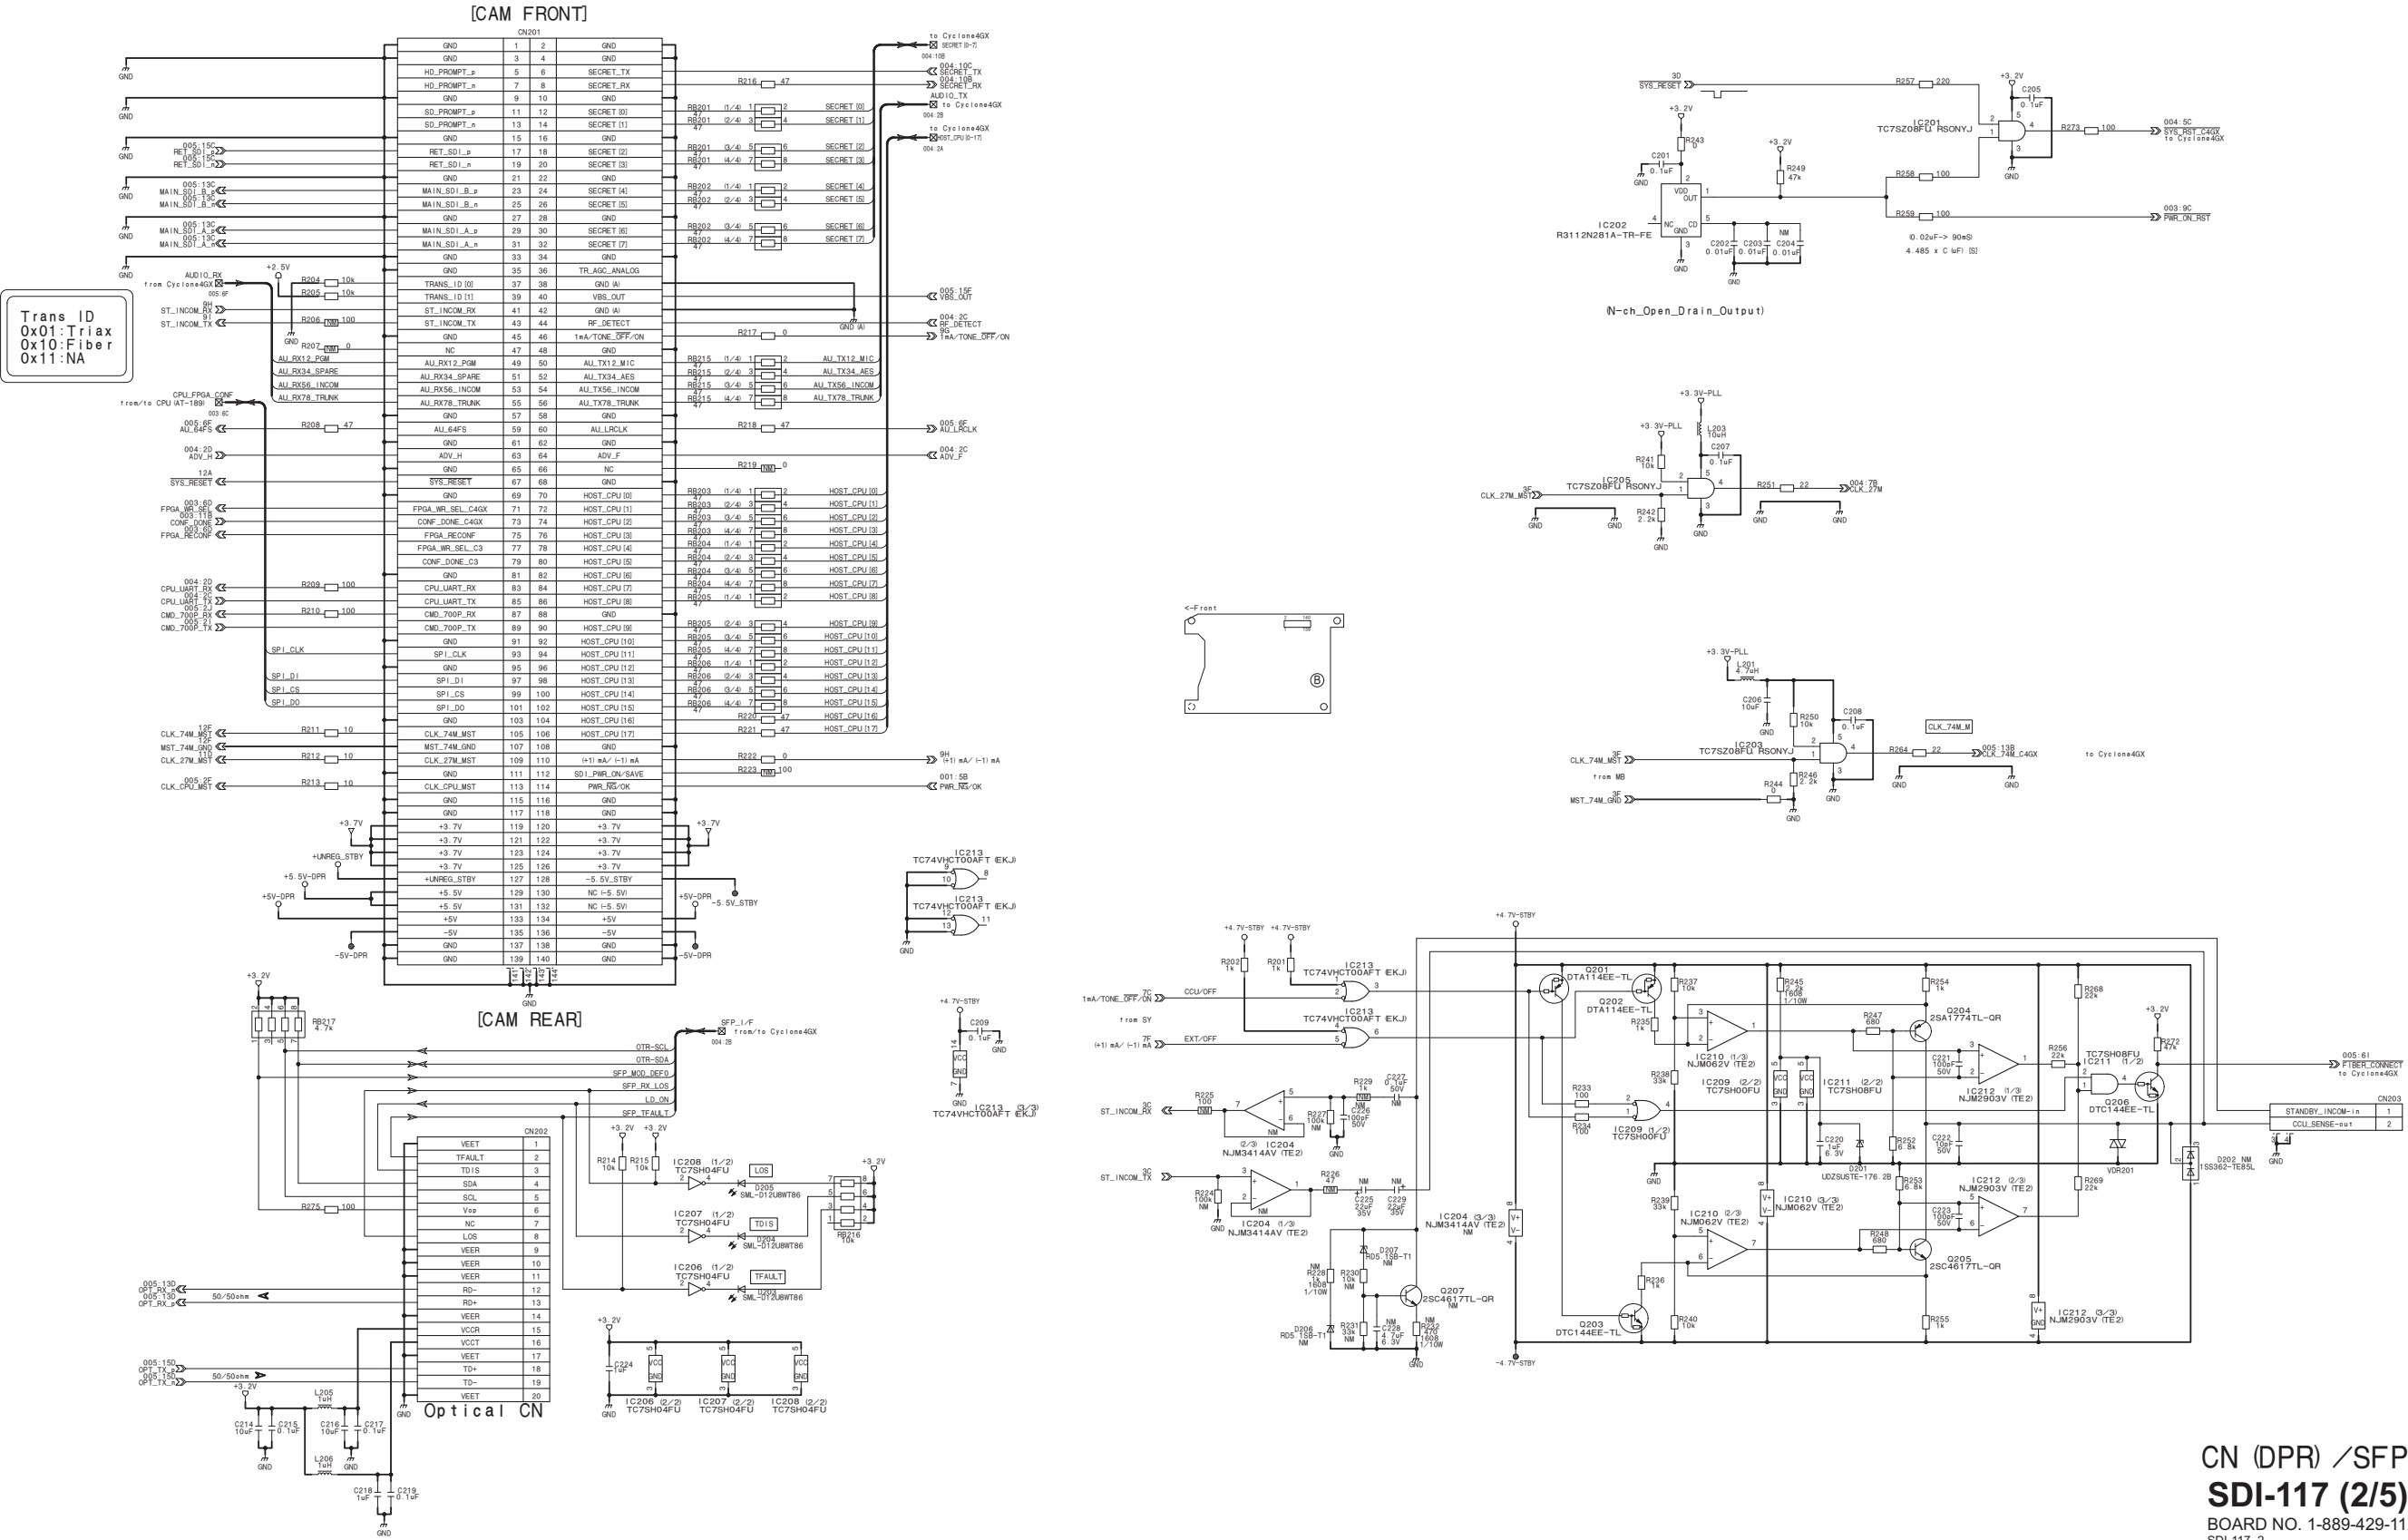


SDI-117 (3/5)

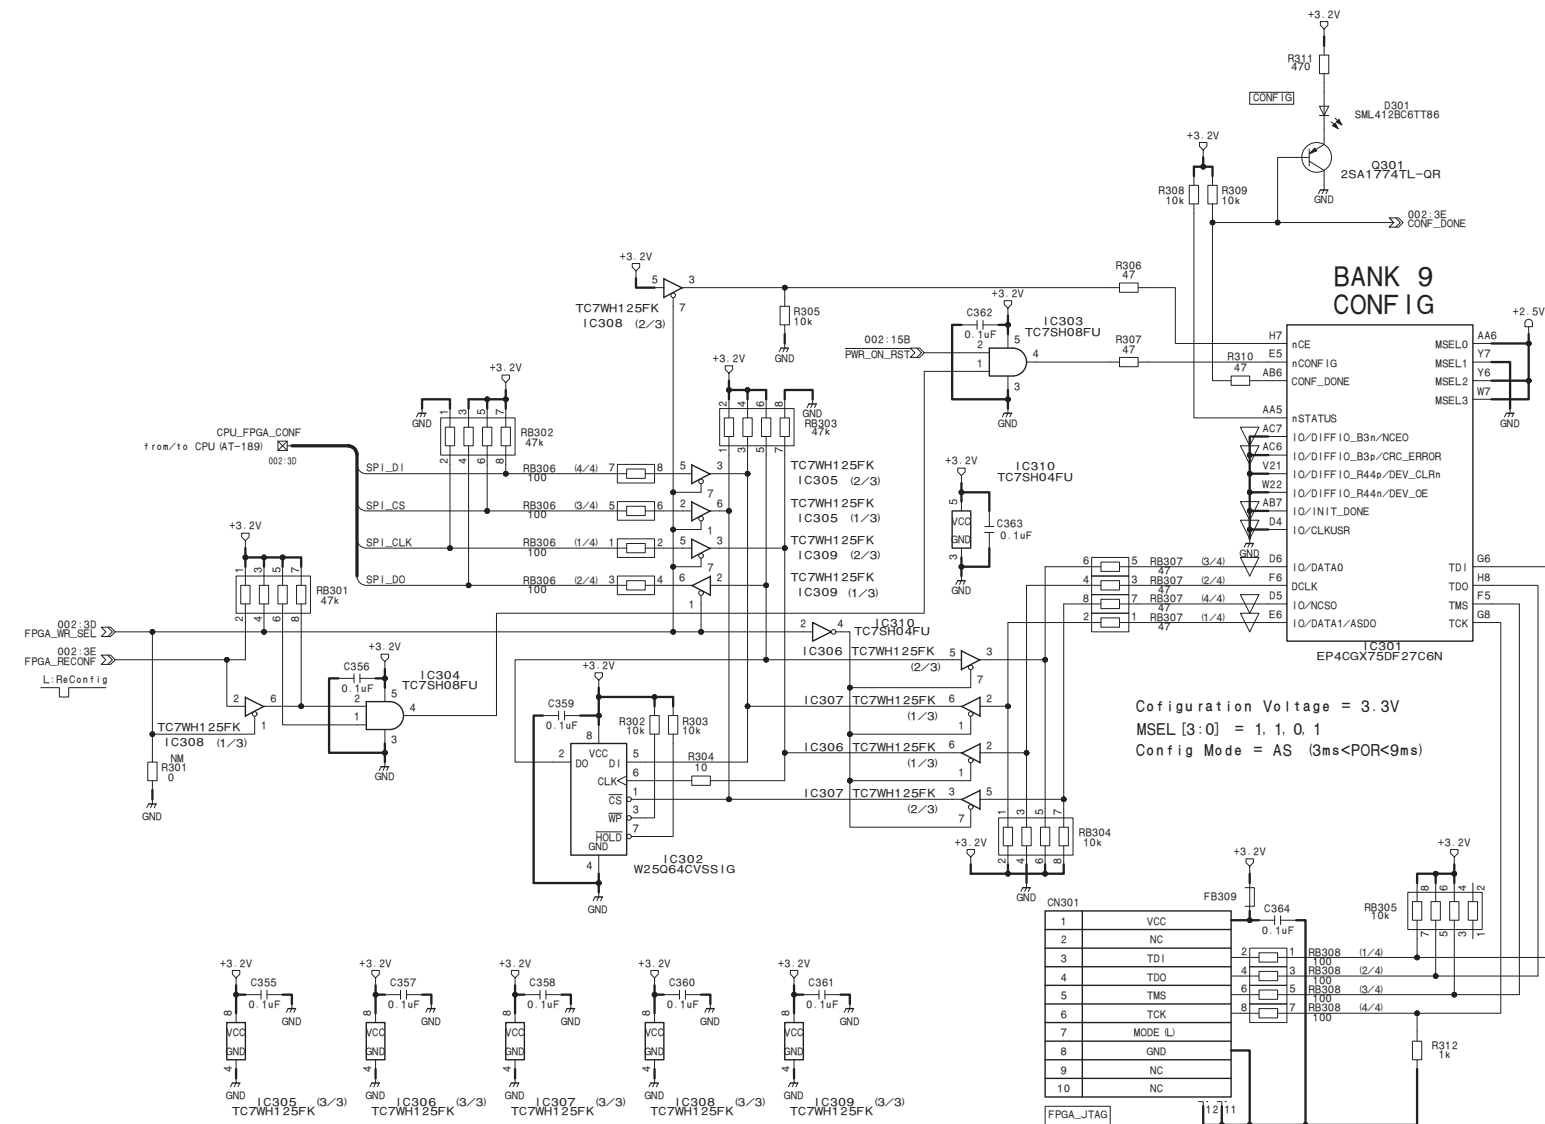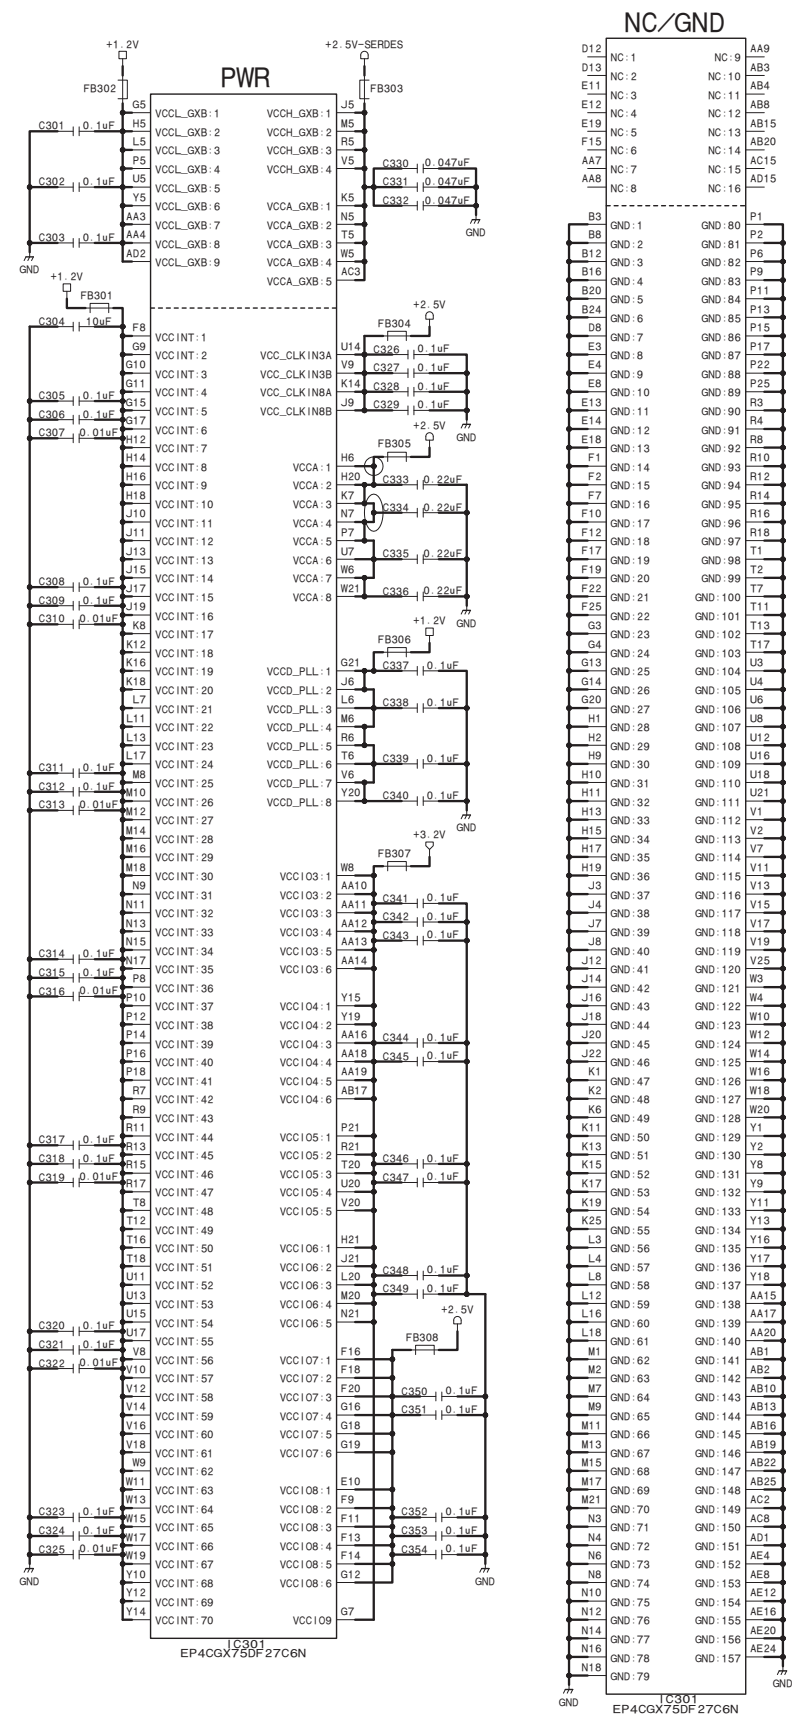


Cyclone4GX (Config/PWR/GND) 1/3


SDI-117 (3/5)
BOARD NO. 1-889-429-11
SDI-117_3

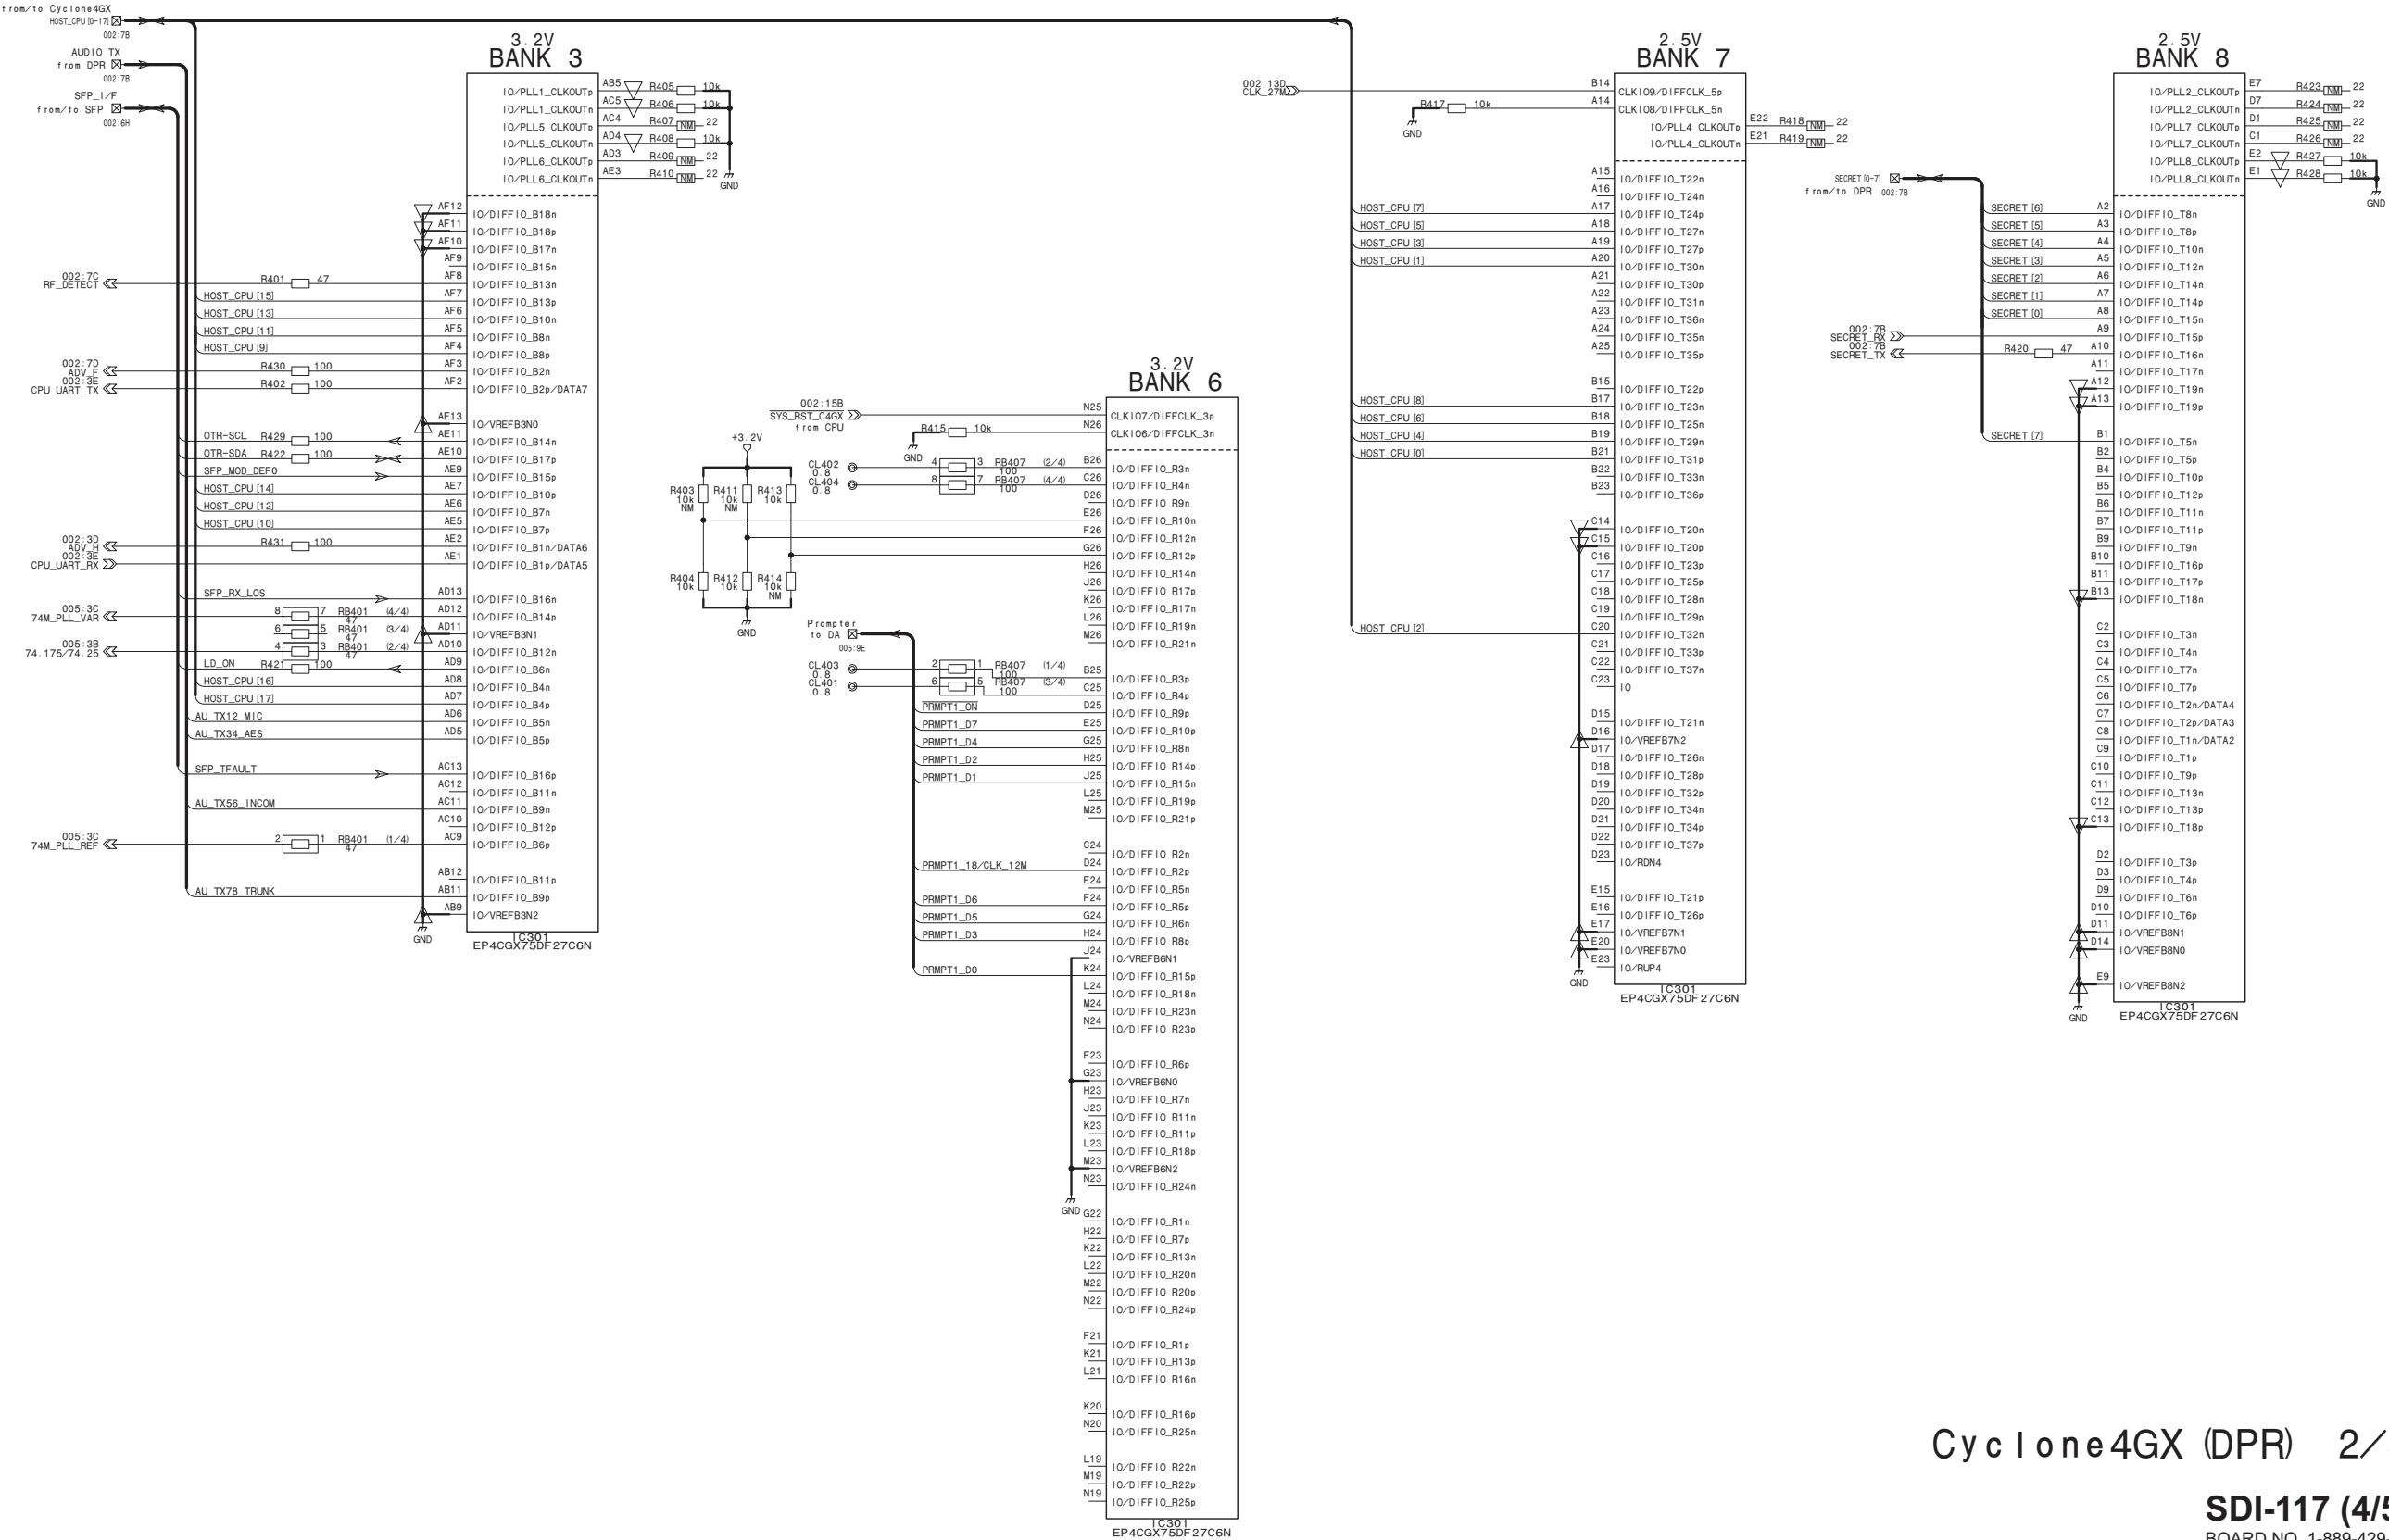


SDI-117 (5/5)

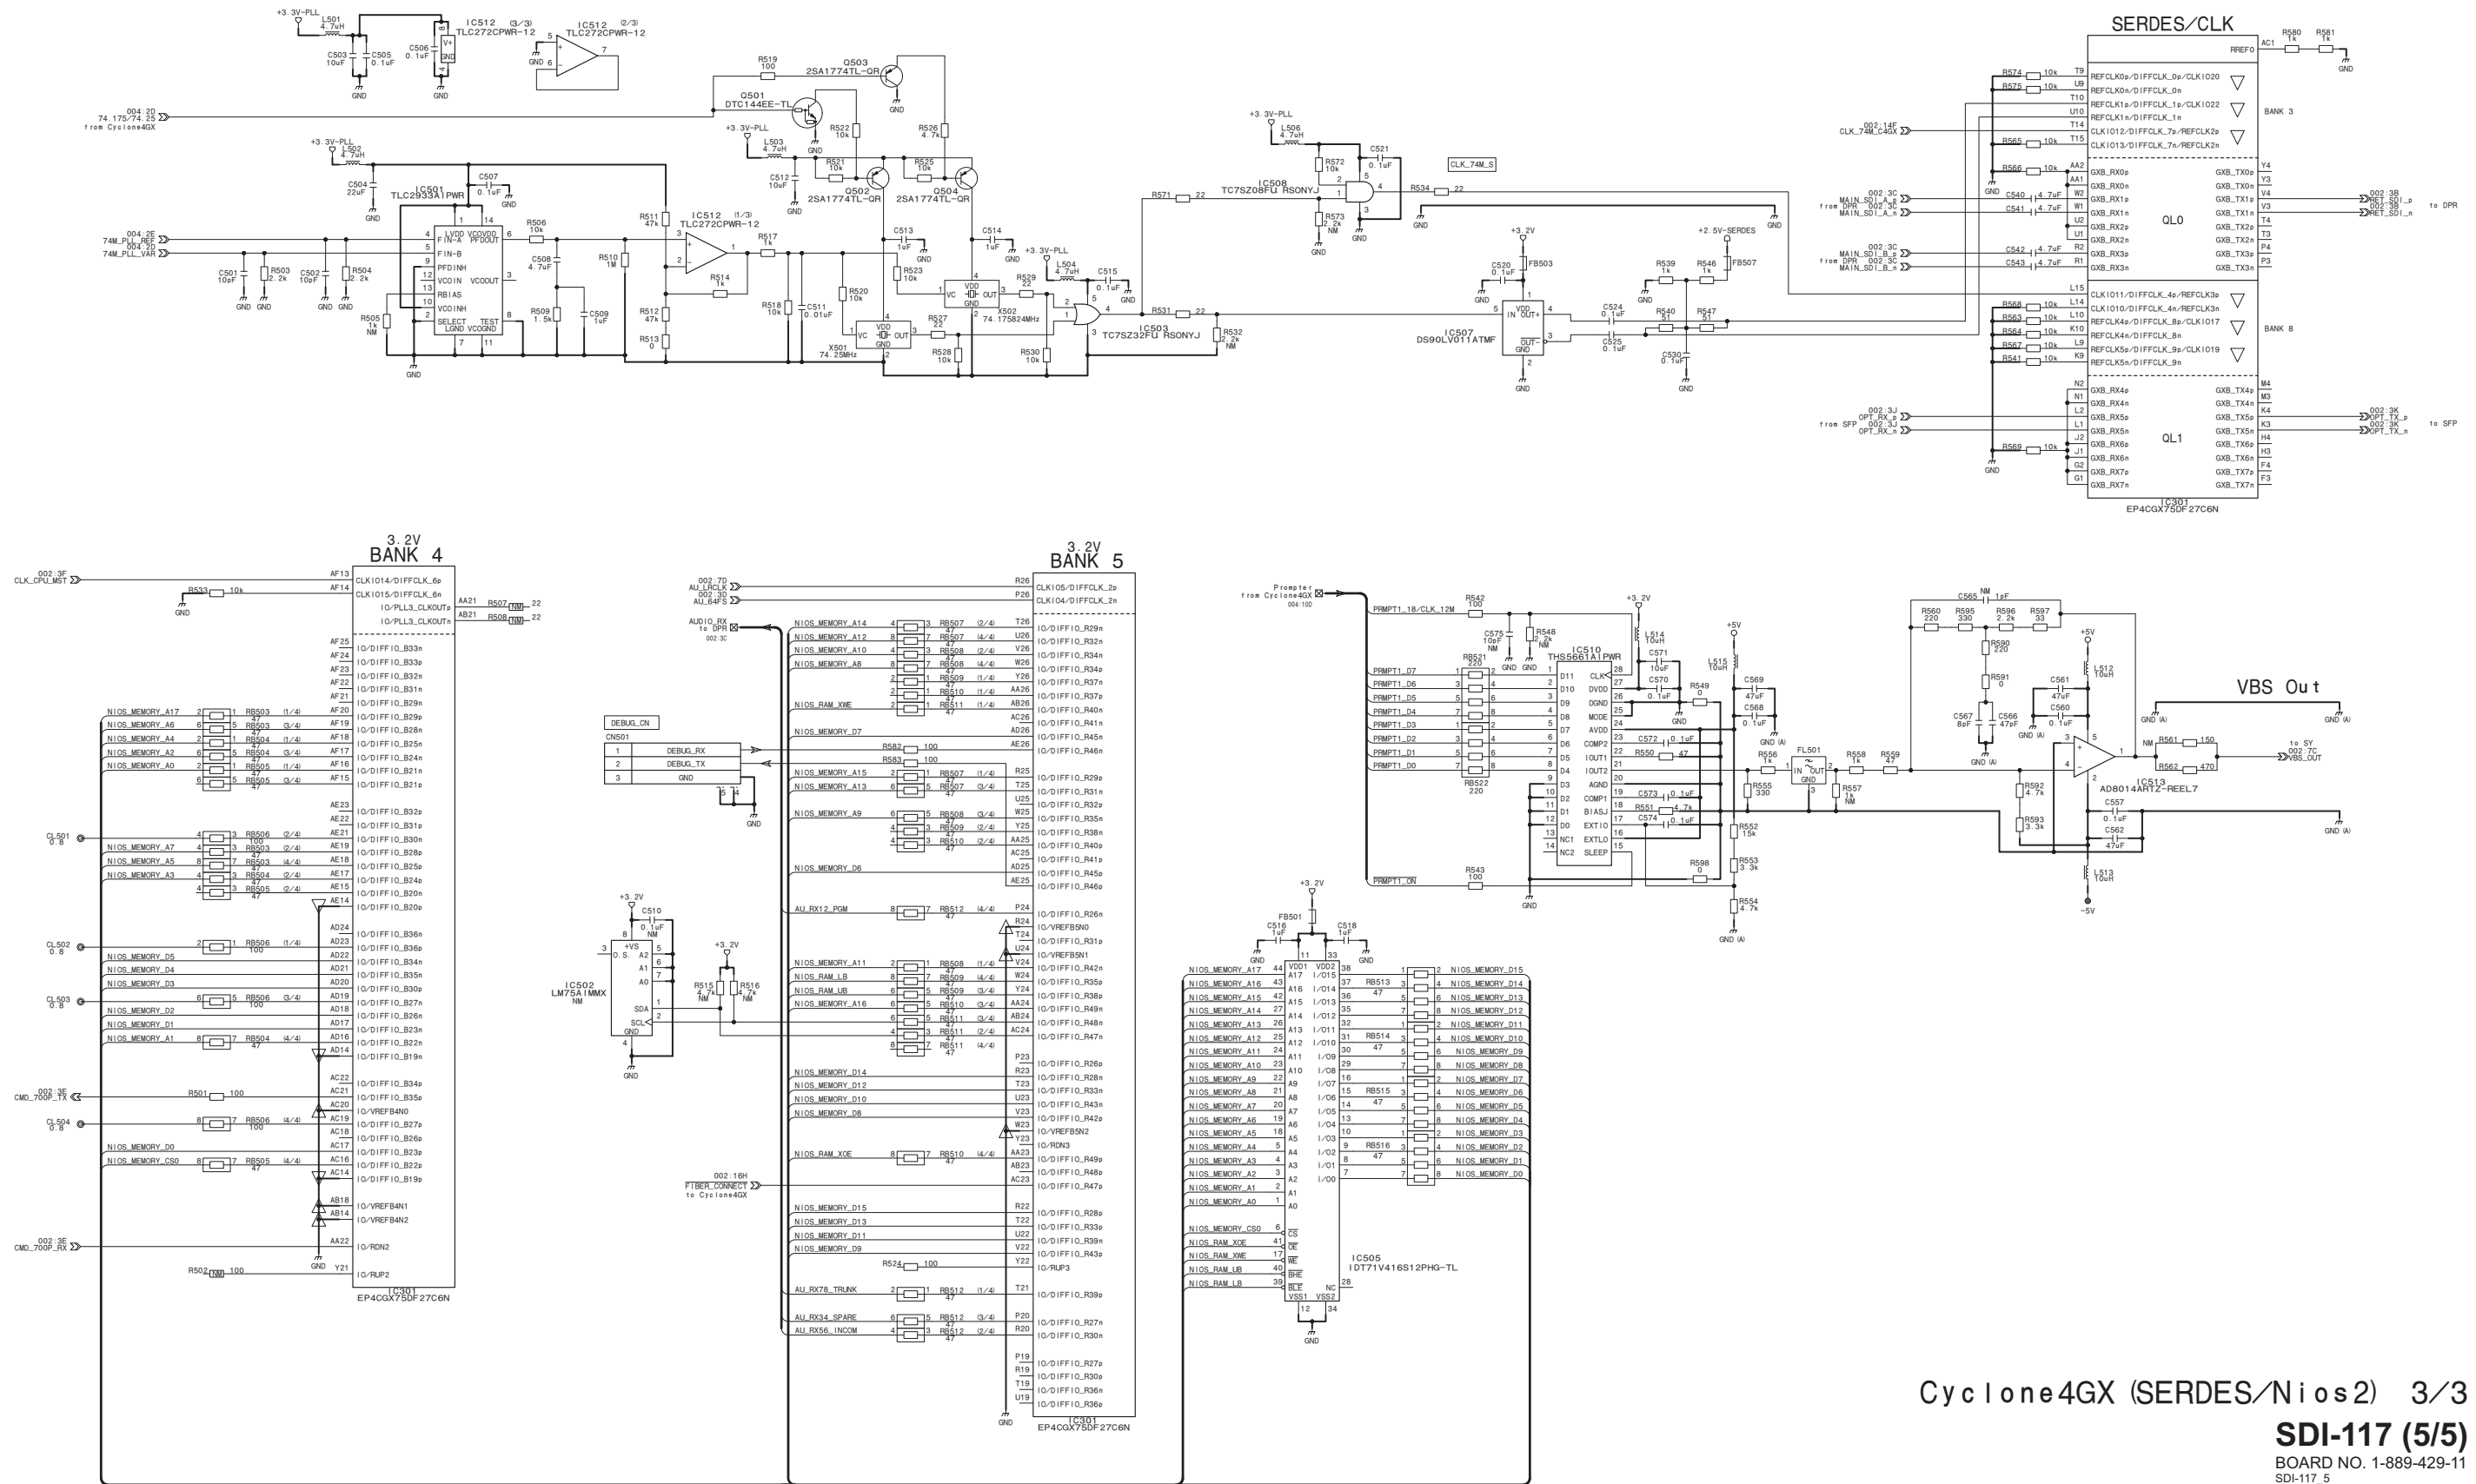


SE-1138

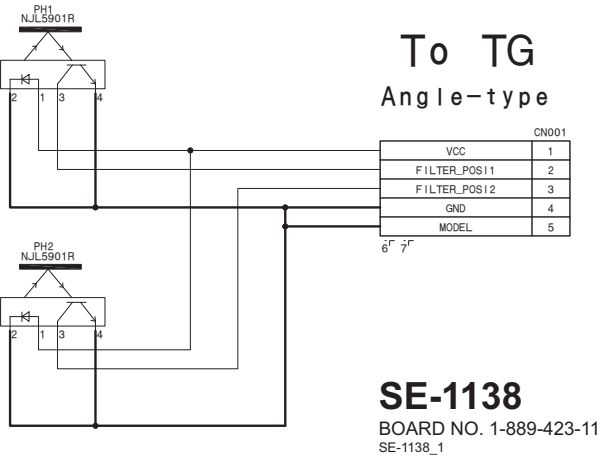


SW-1604

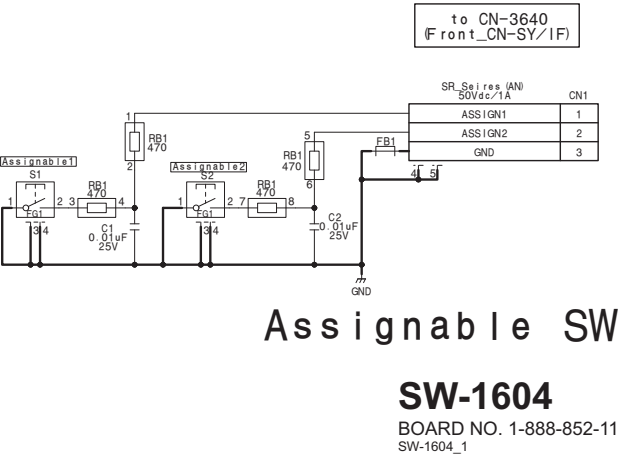


SW-1605

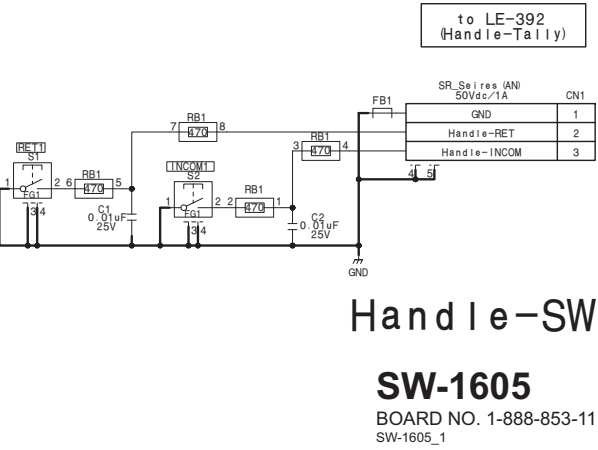

SW-1606

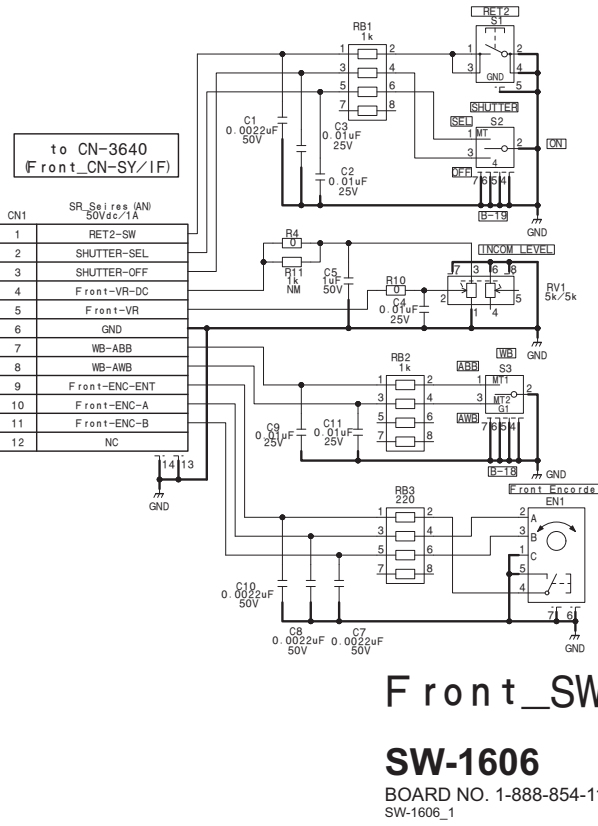


SW-1607

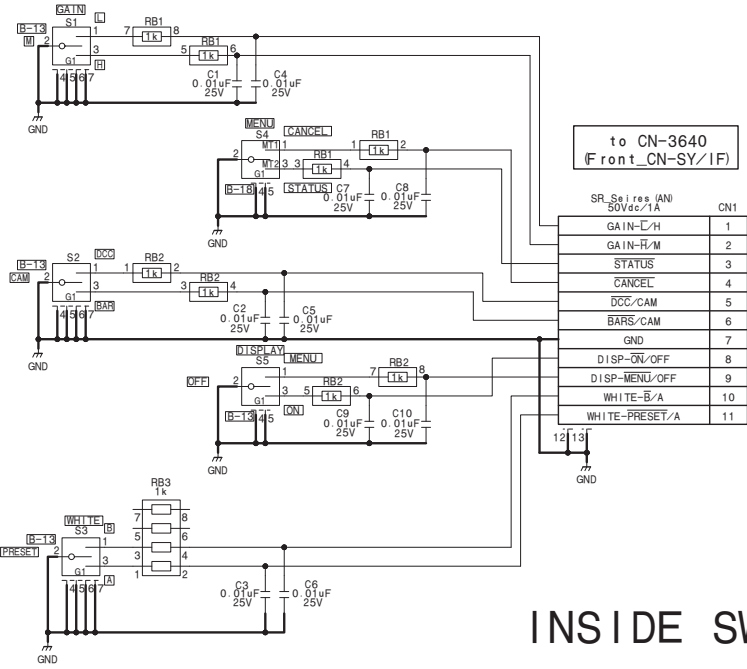

INSIDE SW

SW-1607
BOARD NO. 1-888-855-11
SW-1607_1

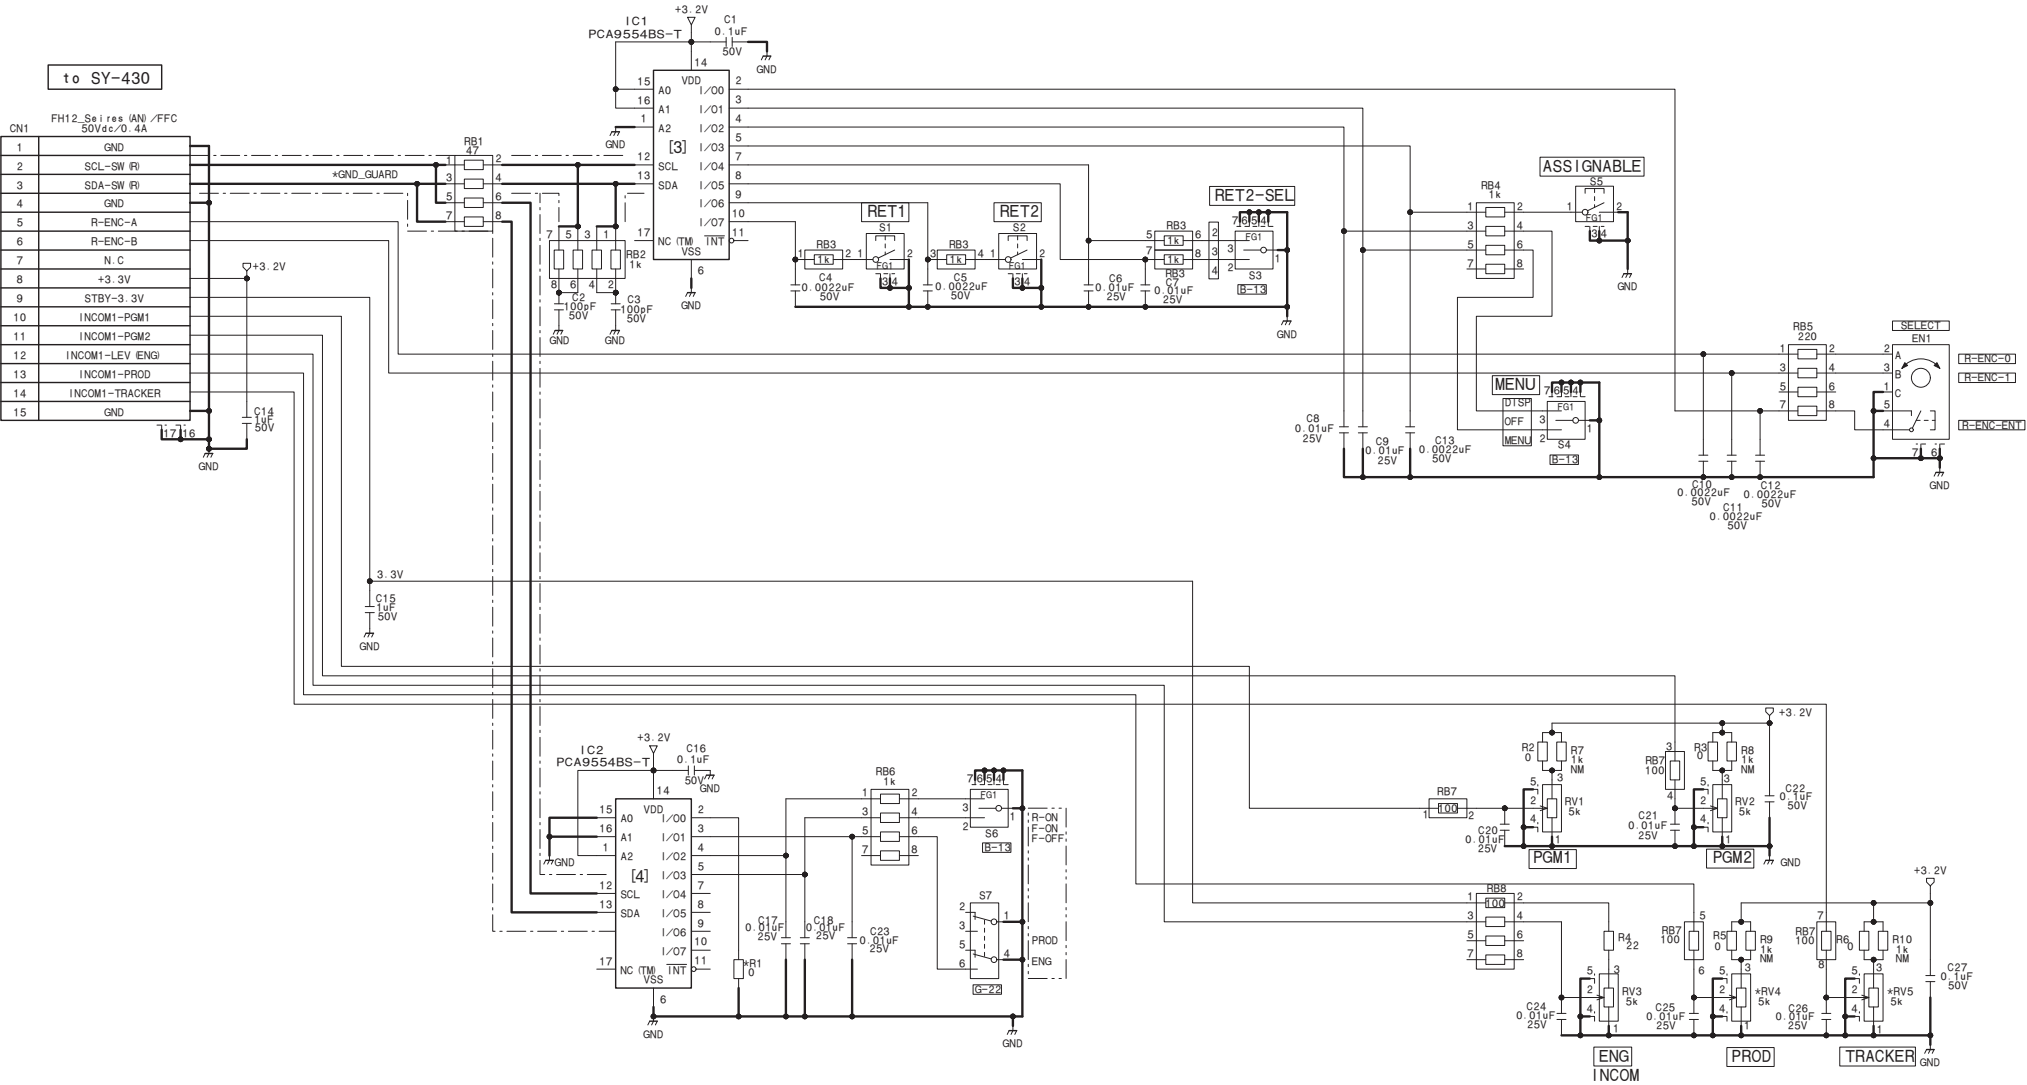


Incom-Panel I

SW-1608

BOARD NO. 1-888-856-11
SW-1608_1

SW-1608A

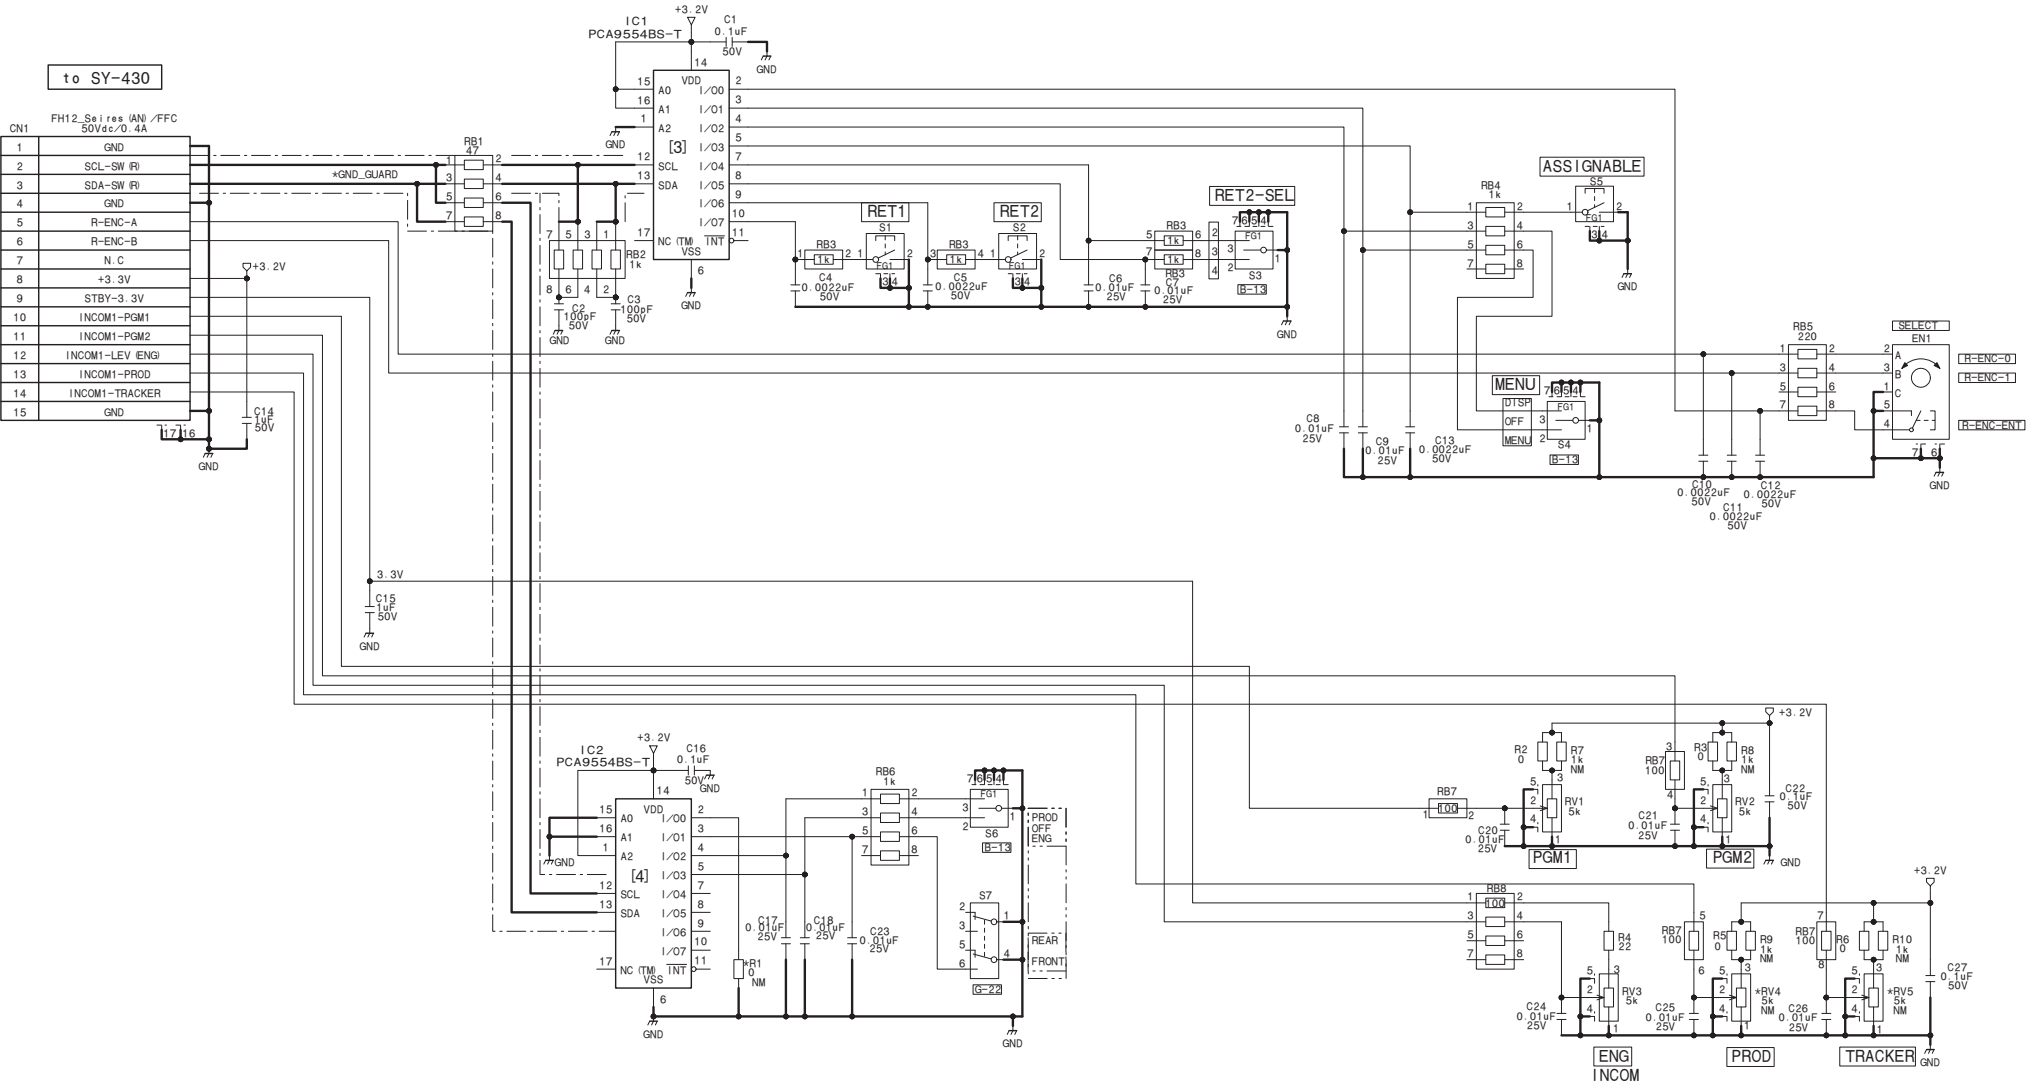


Incom-Panel I

SW-1608A

BOARD NO. 1-888-856-11
SW-1608A_1

SW-1609


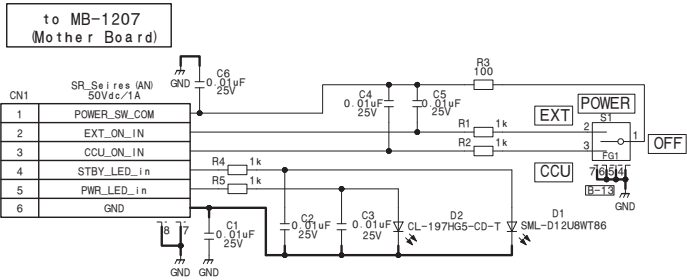



POWER SW


SW-1609

BOARD NO. 1-888-857-11
SW-1609_1


SY-430
SY-430 (1/19)

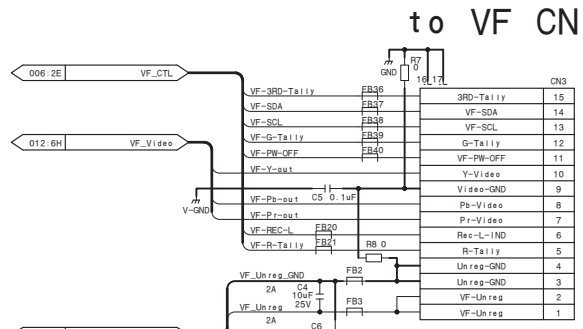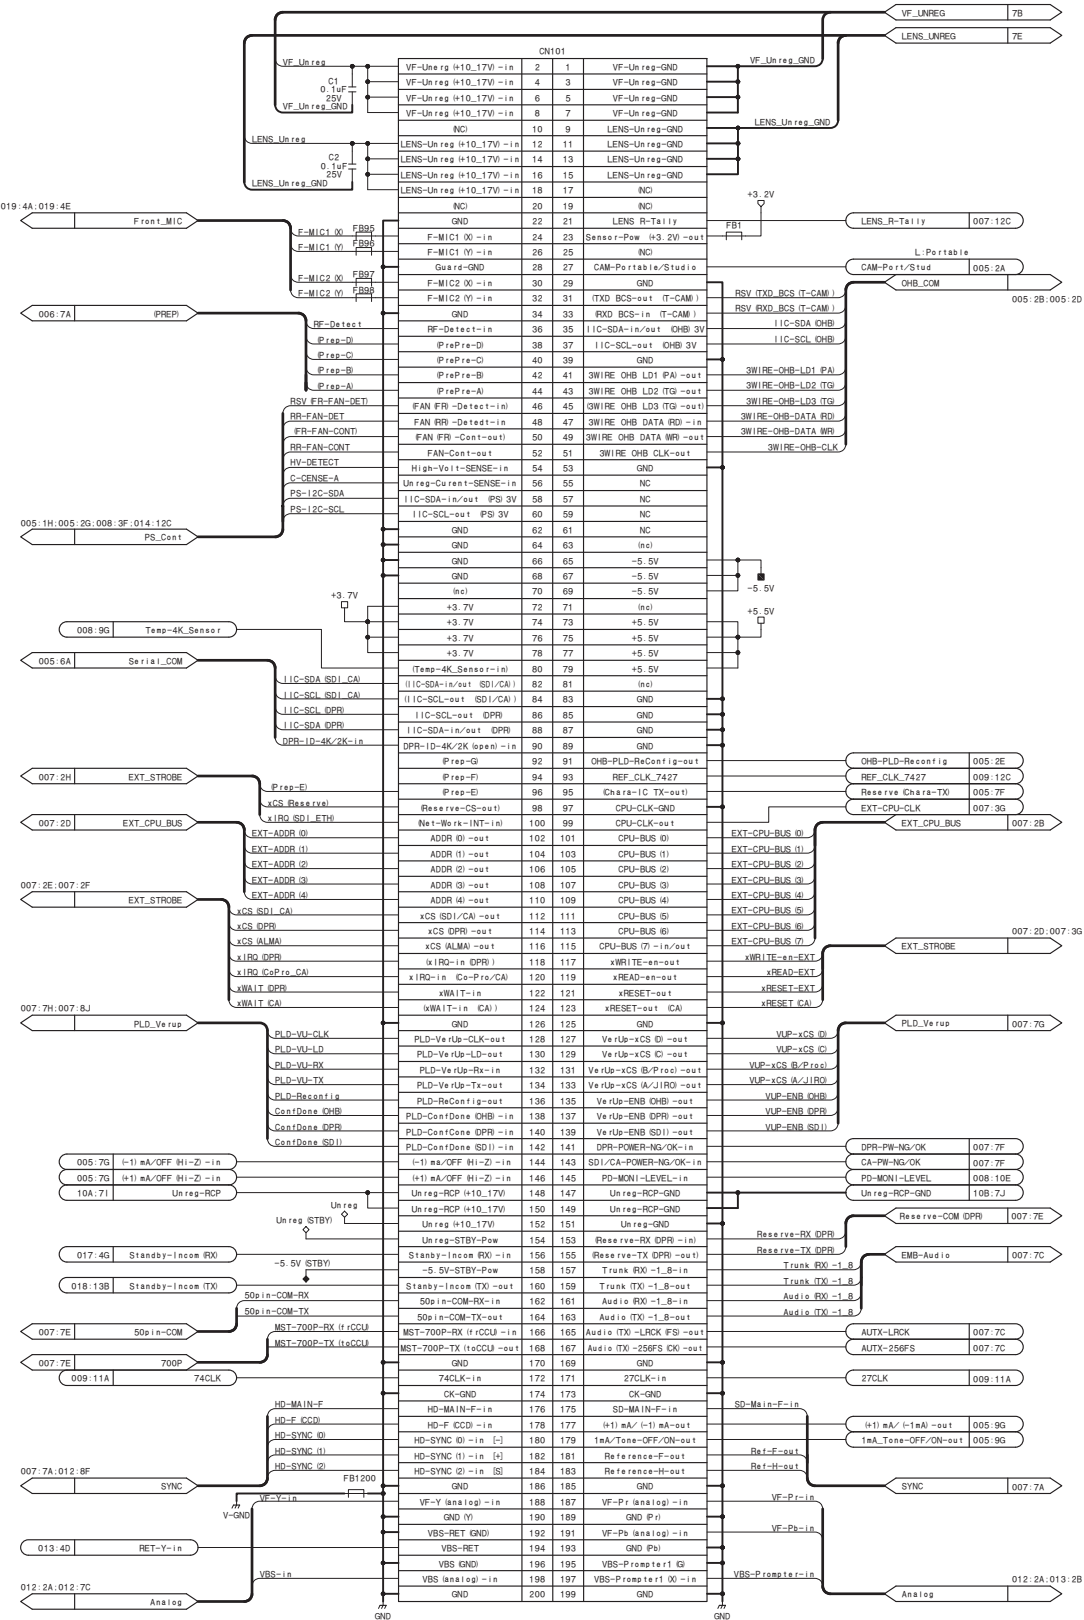

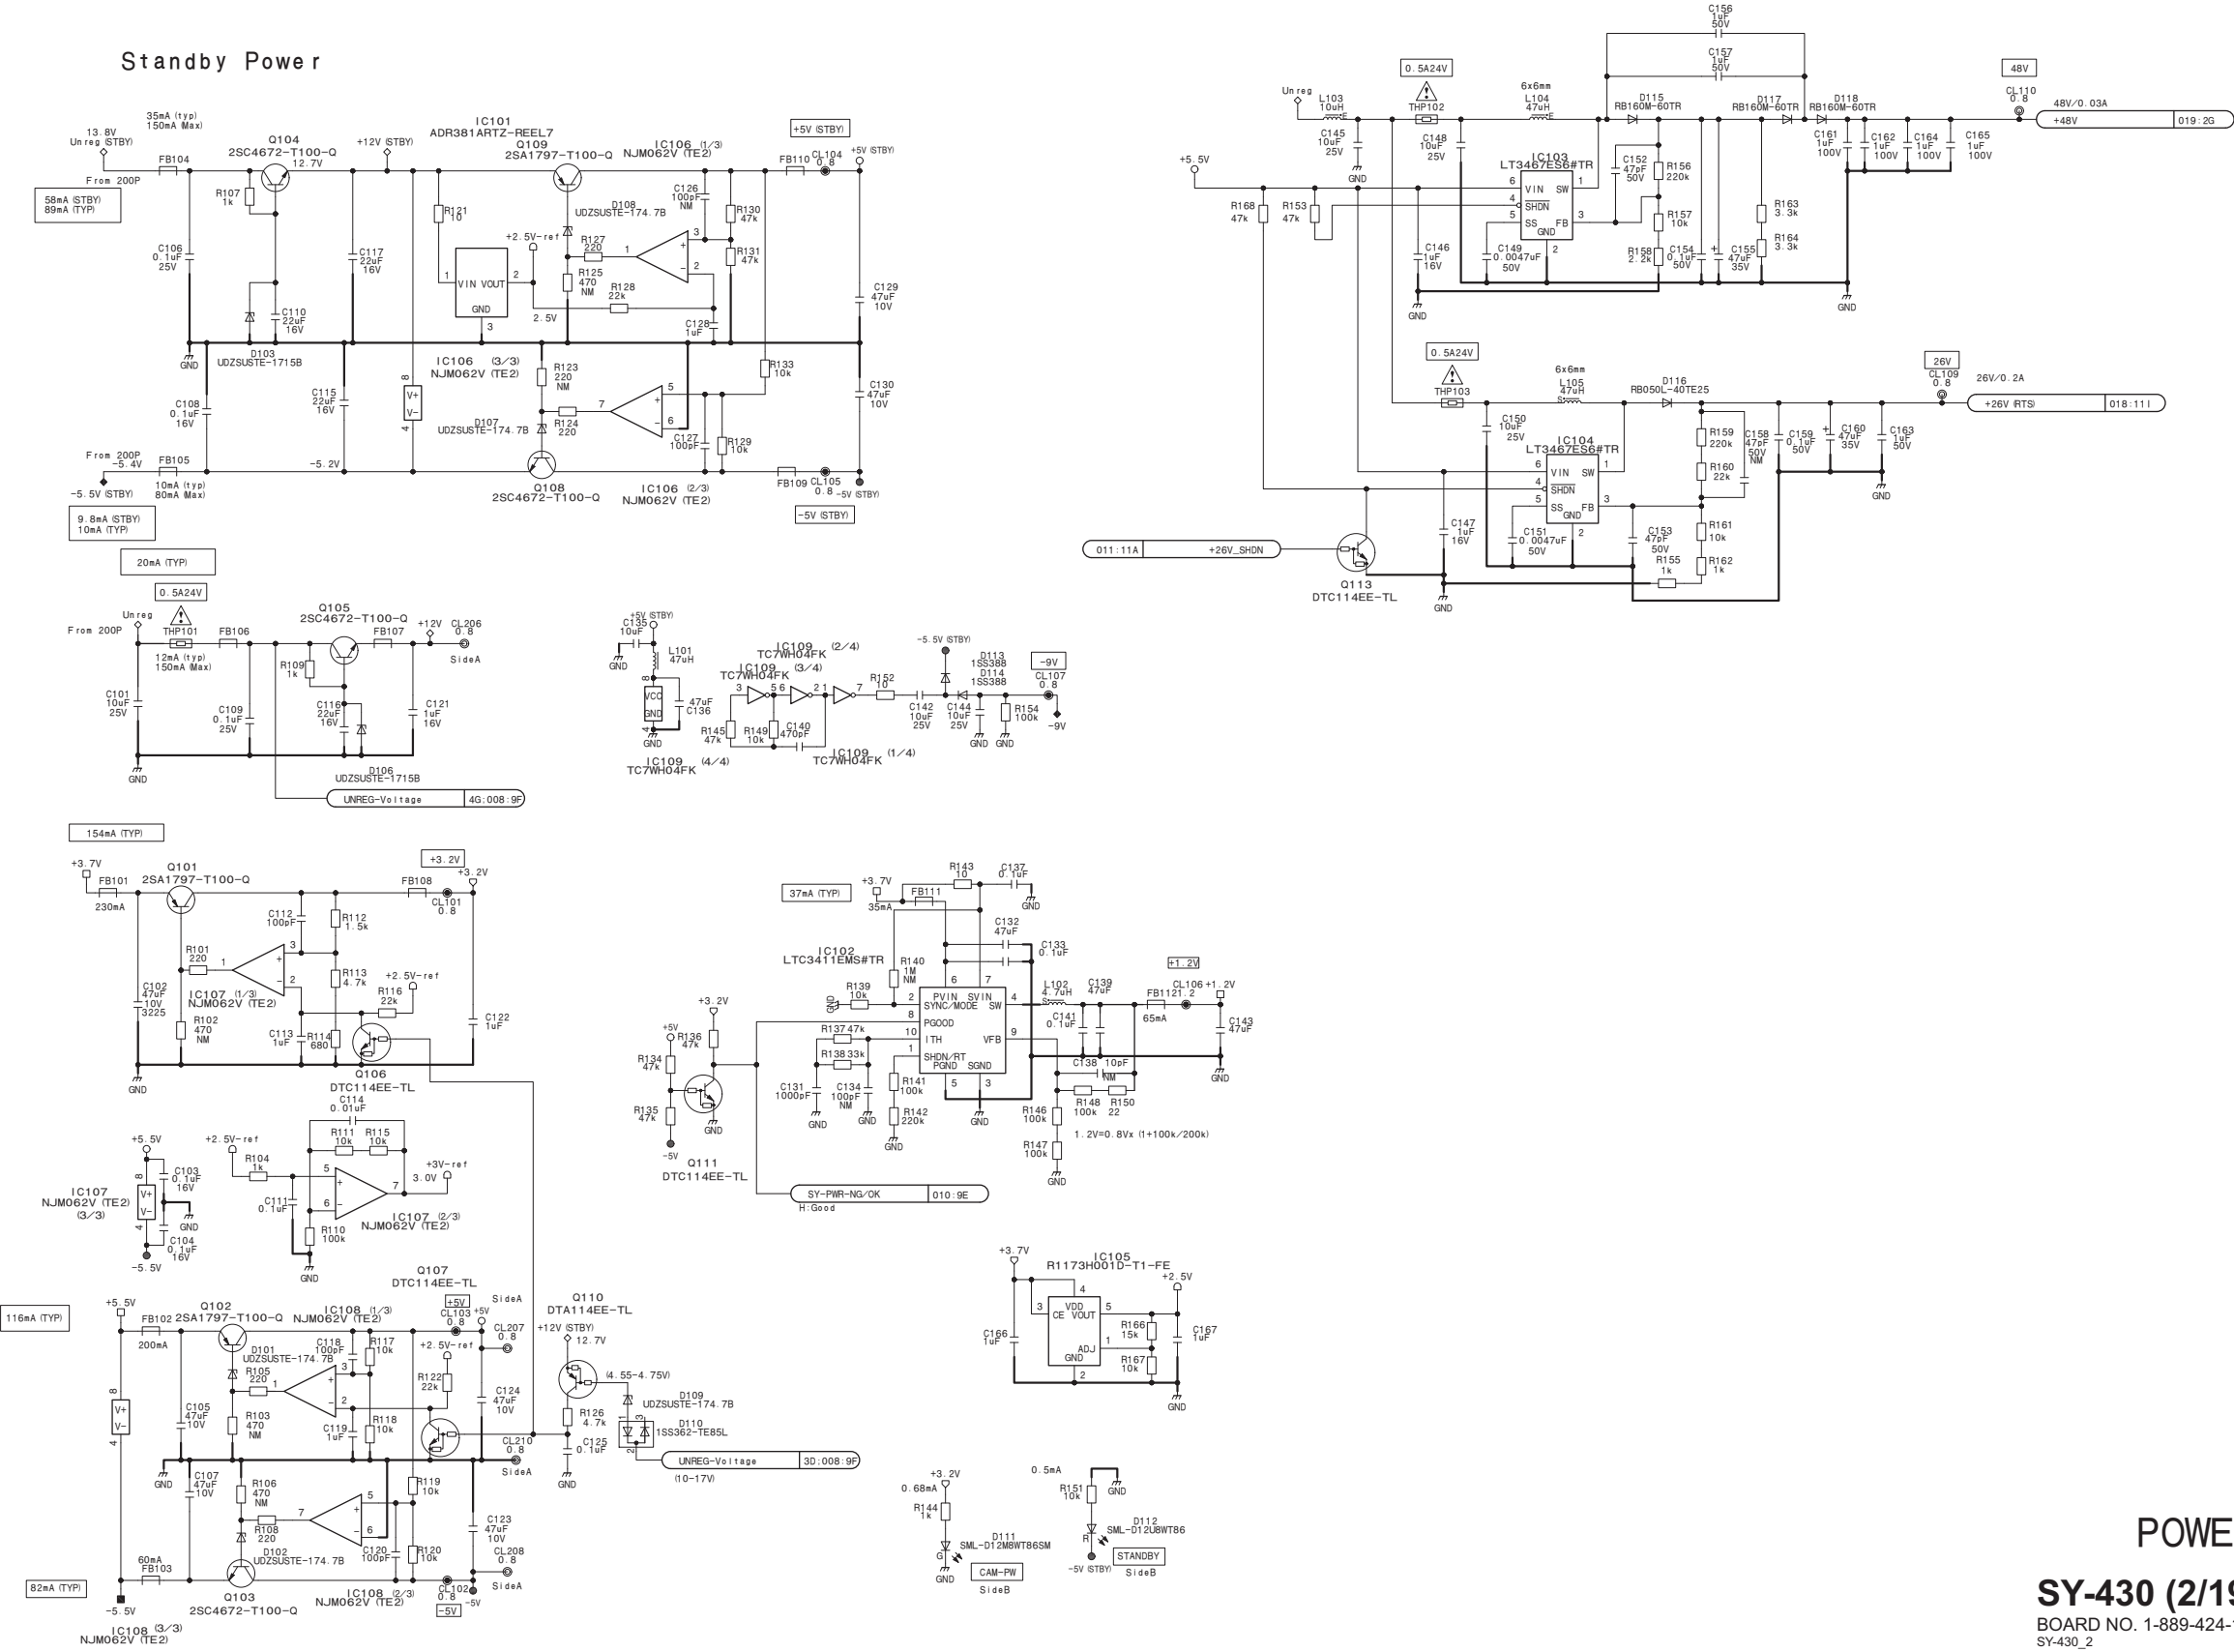








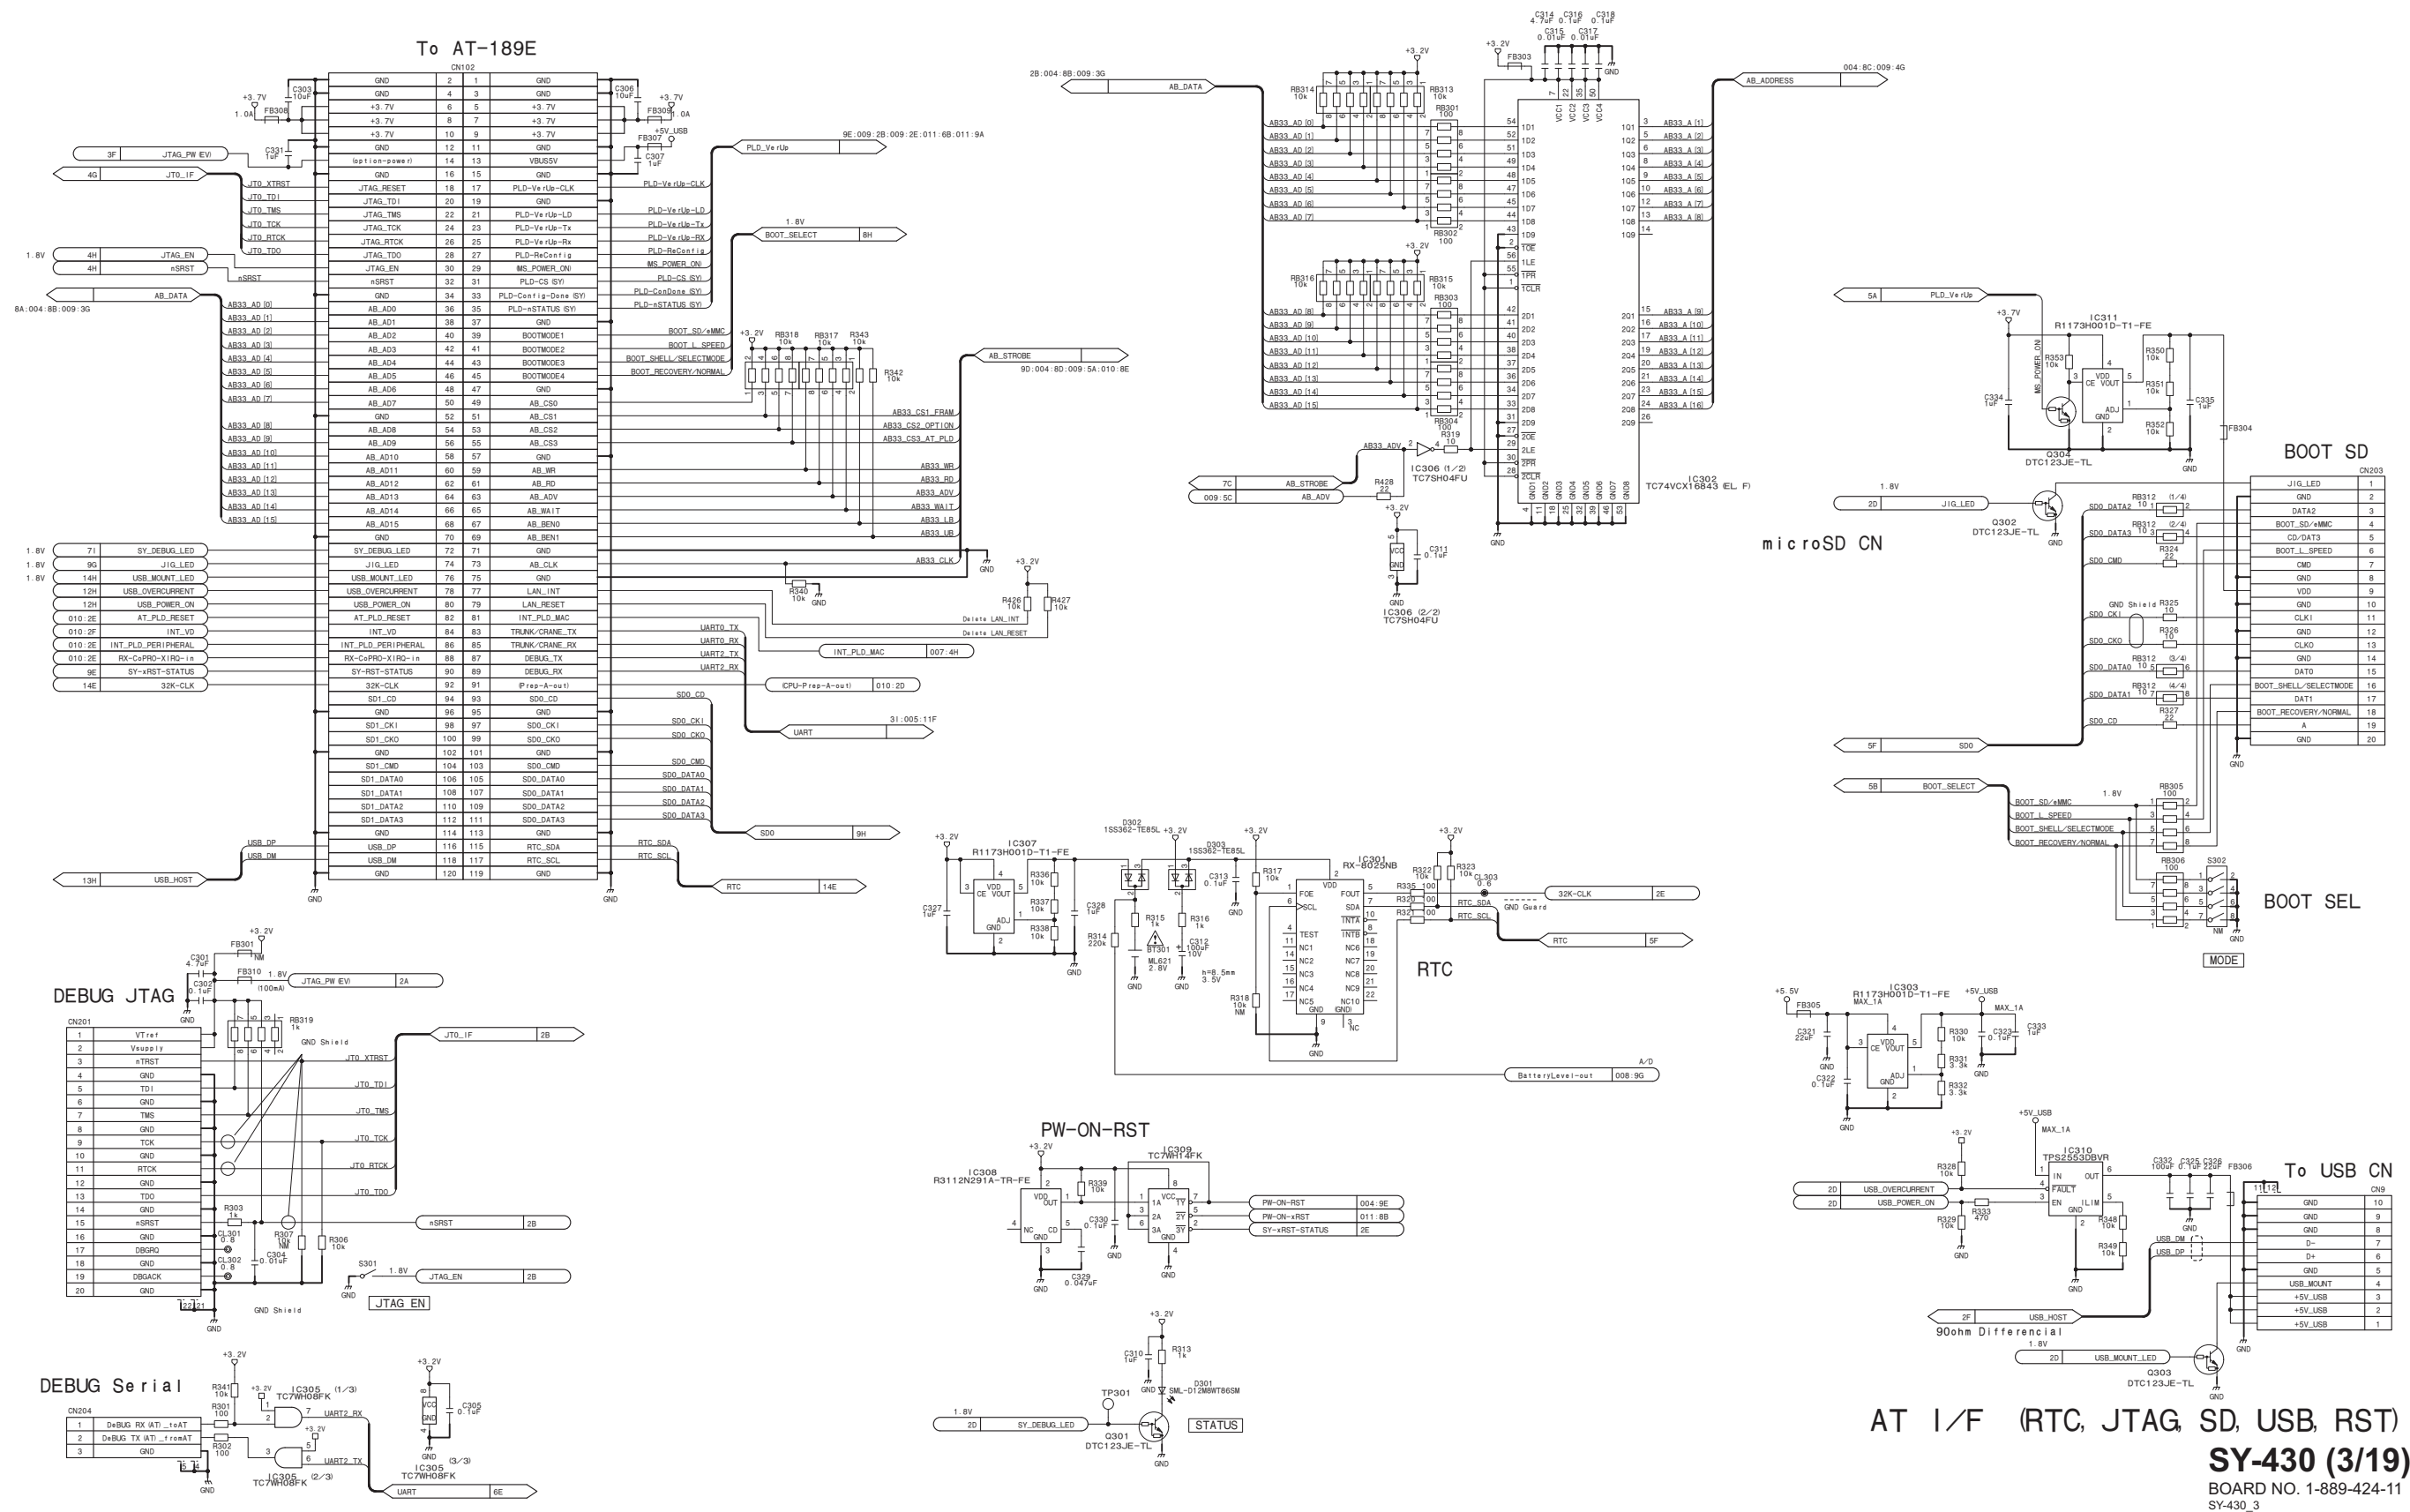


SY-430 (4/19)






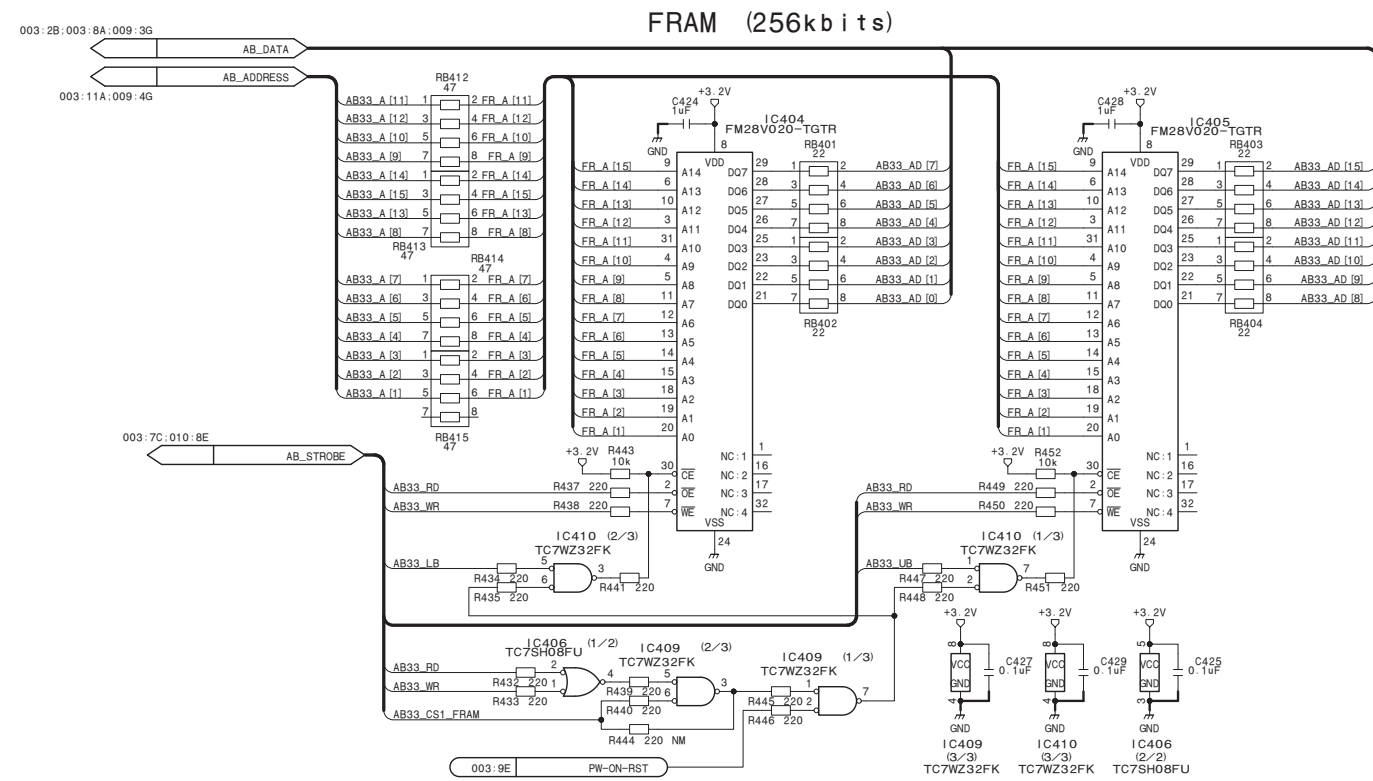


FRAM










SY-430 (4/19)
BOARD NO. 1-889-424-11
SY-430_4

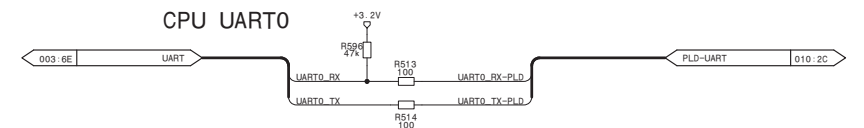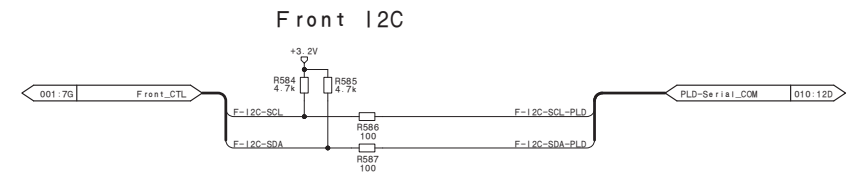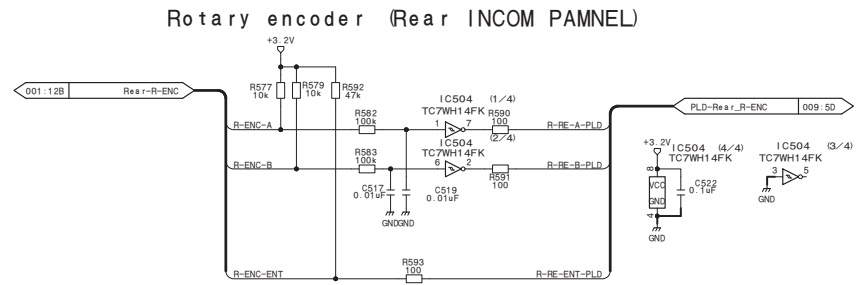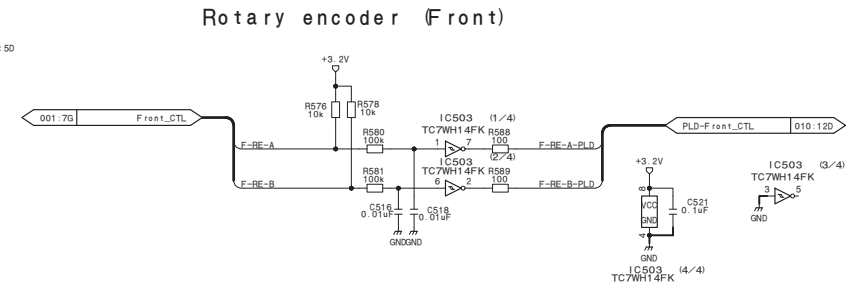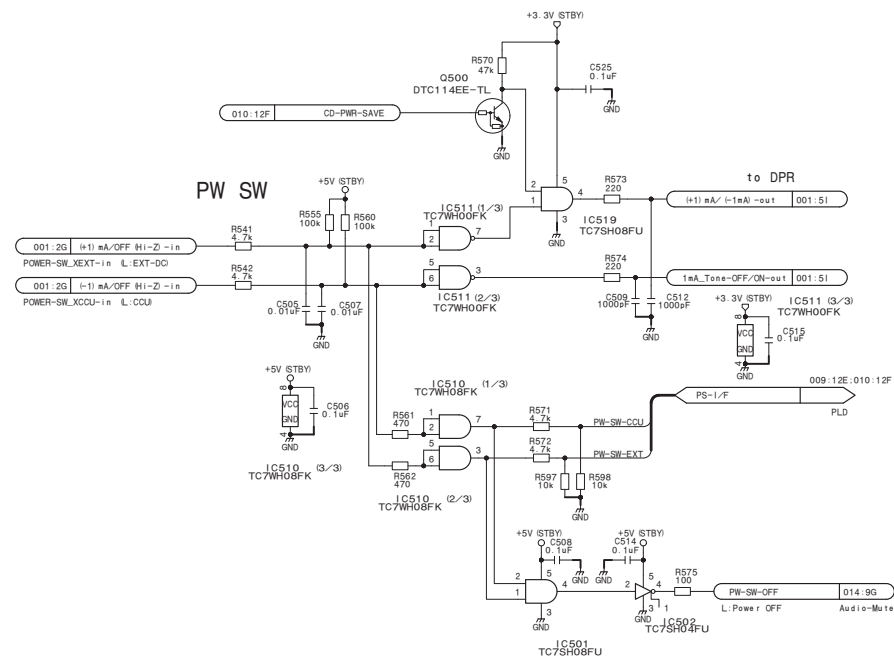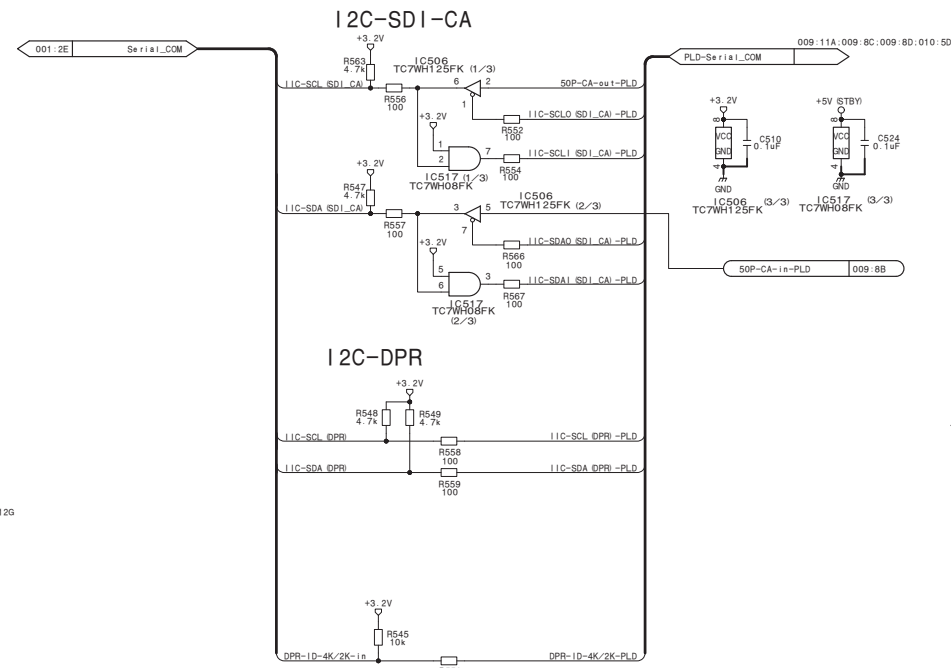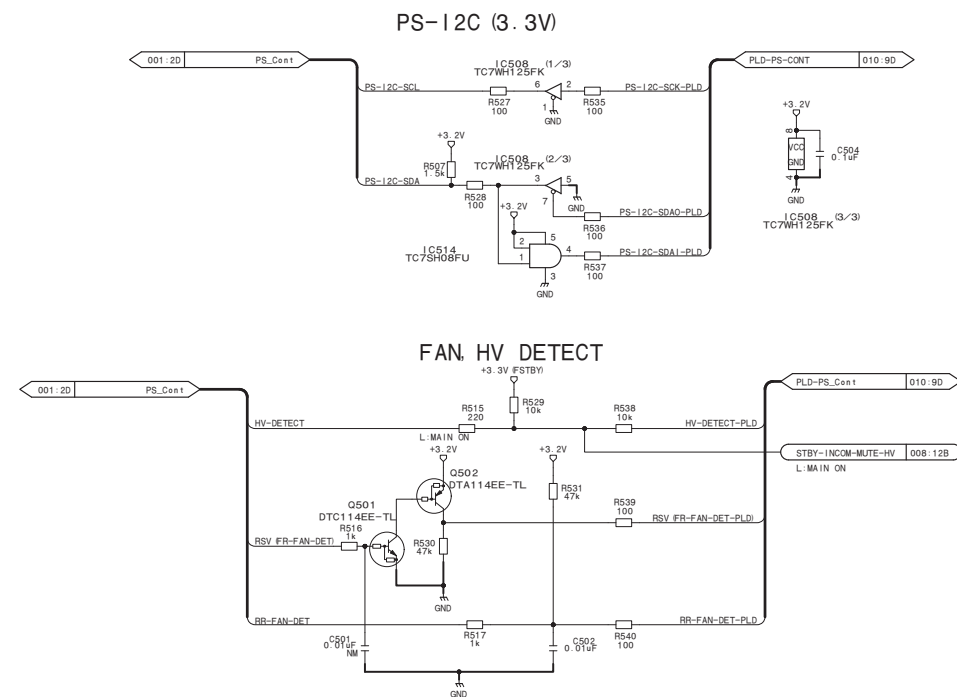
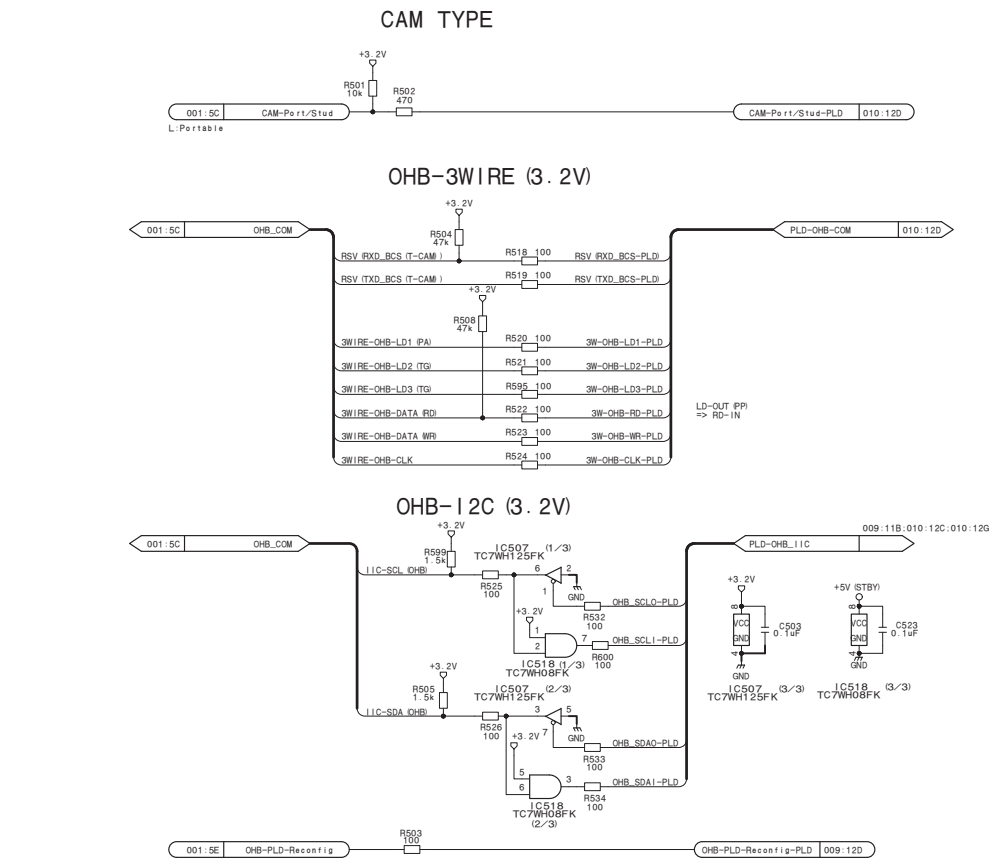


SY-430 (6/19)

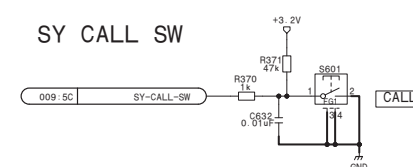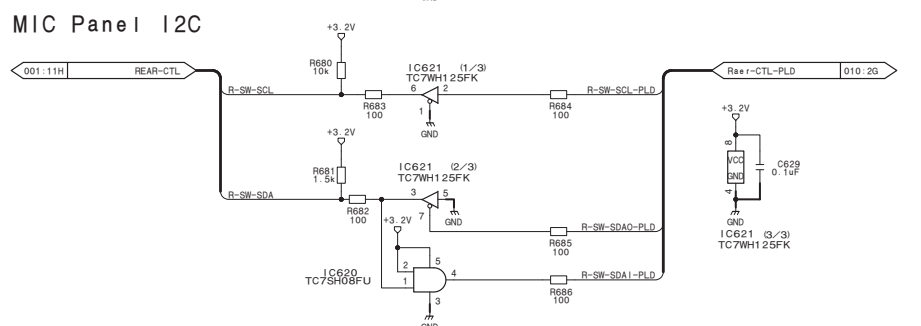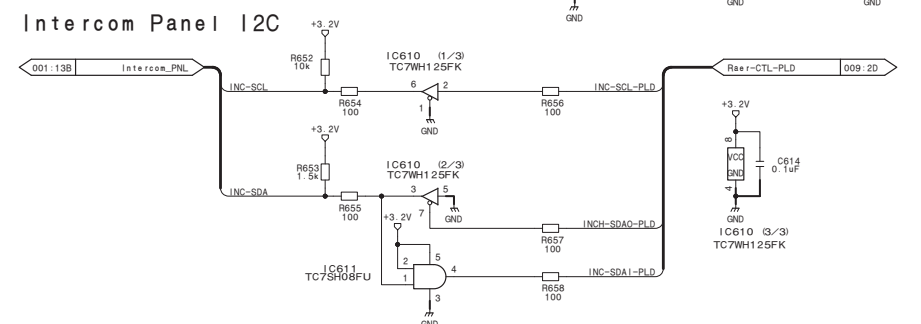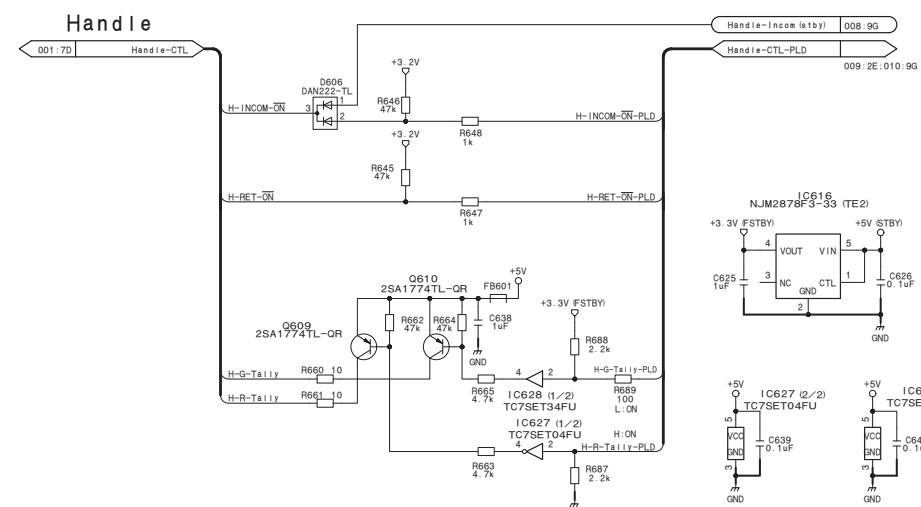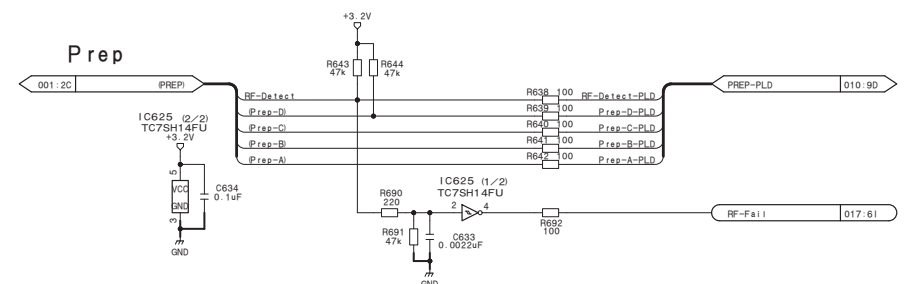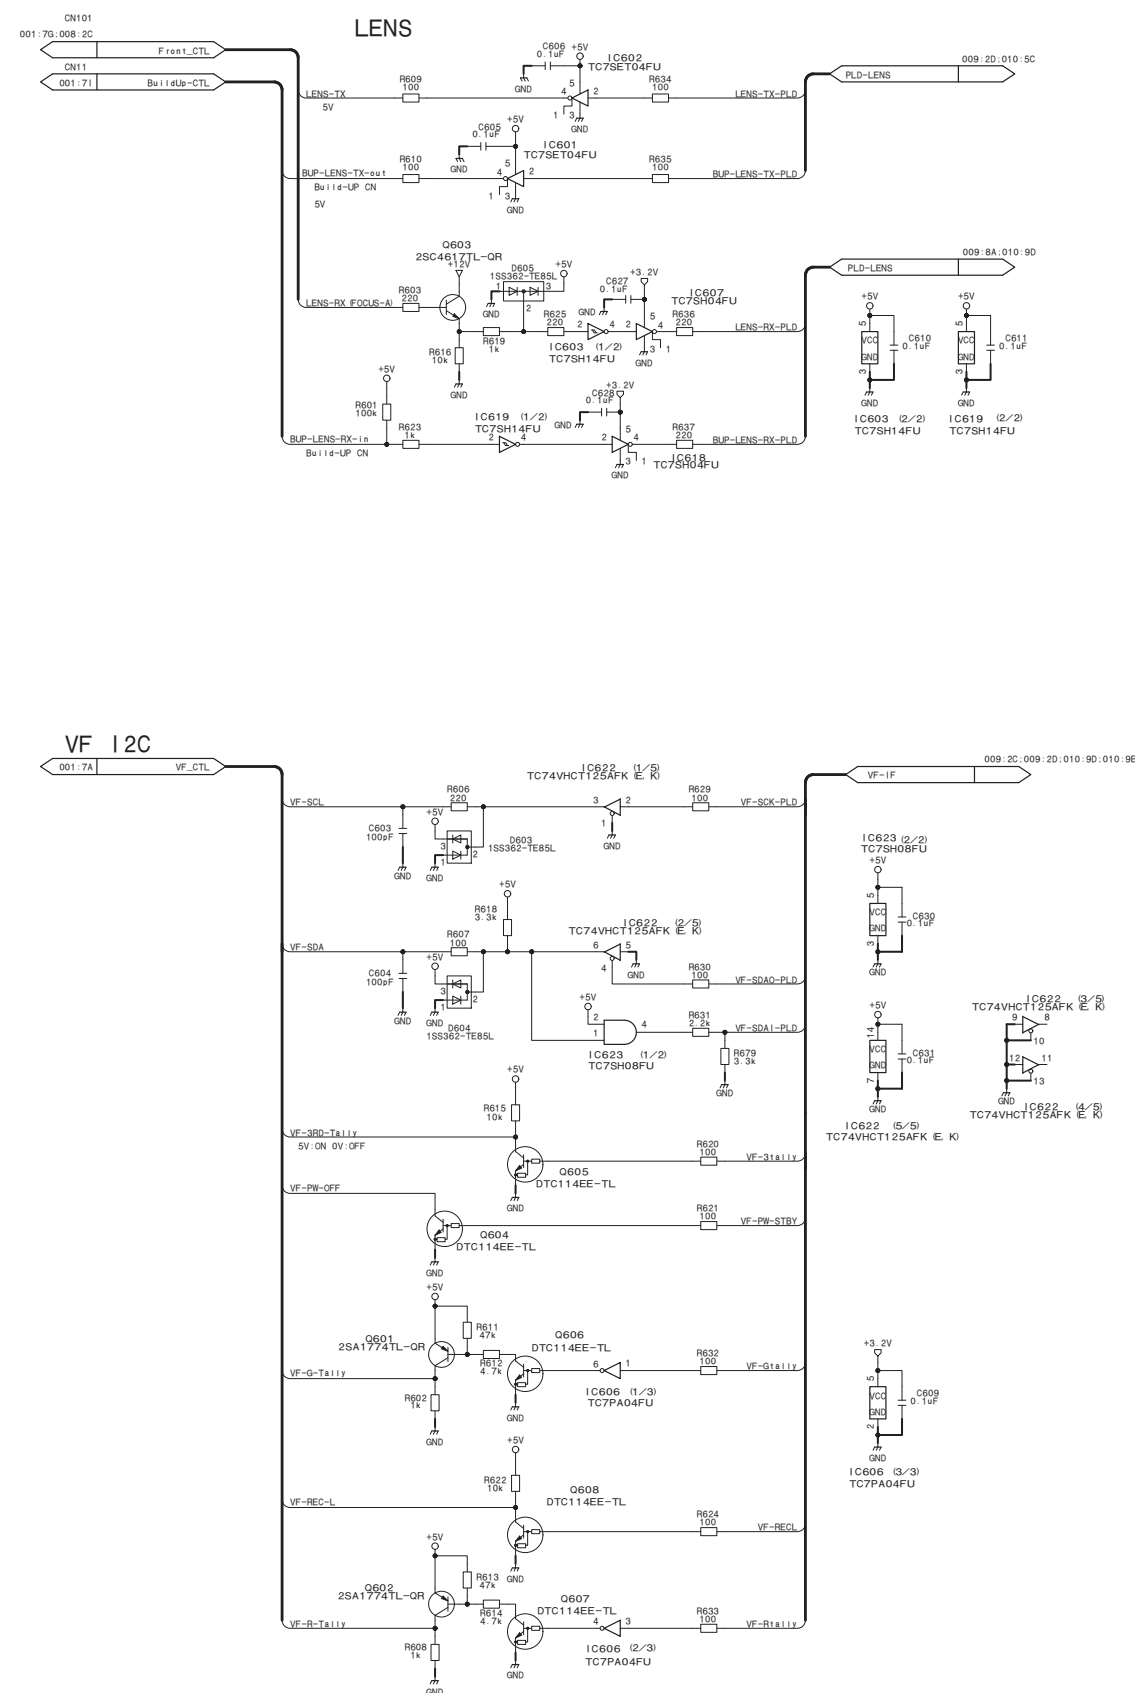






SY-430 (6/19)
BOARD NO. 1-889-424-11
SY-430_6

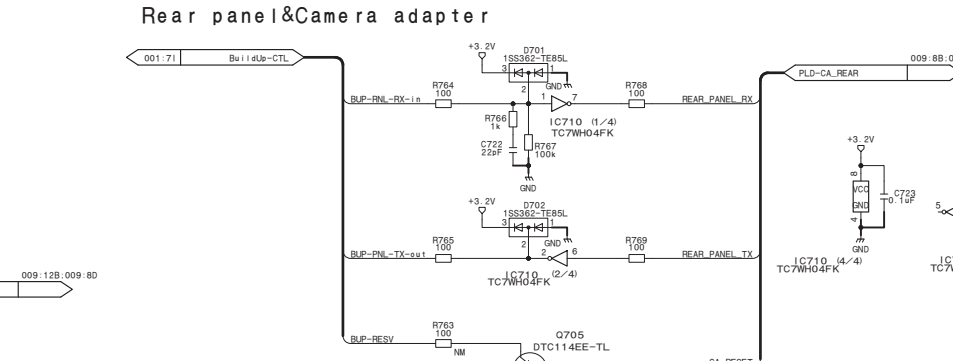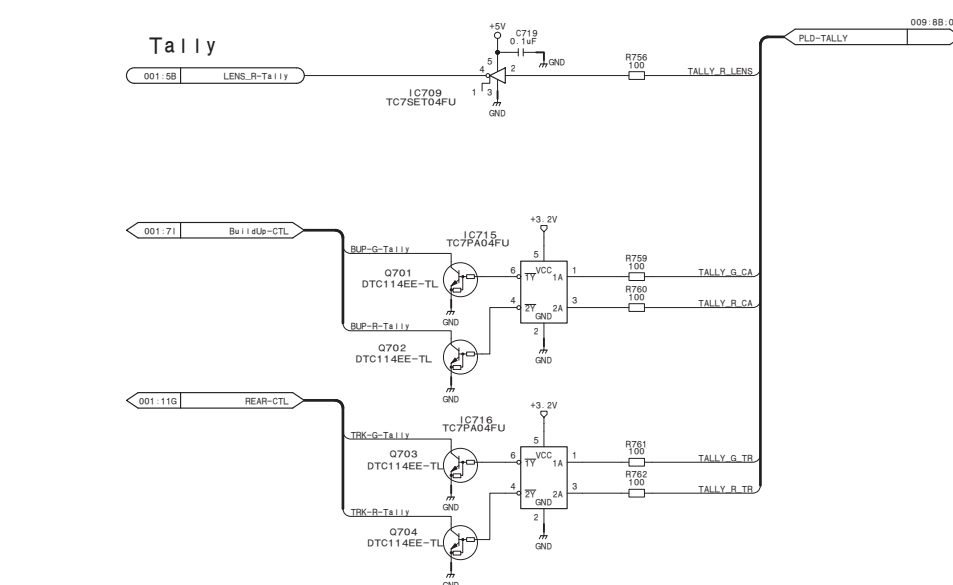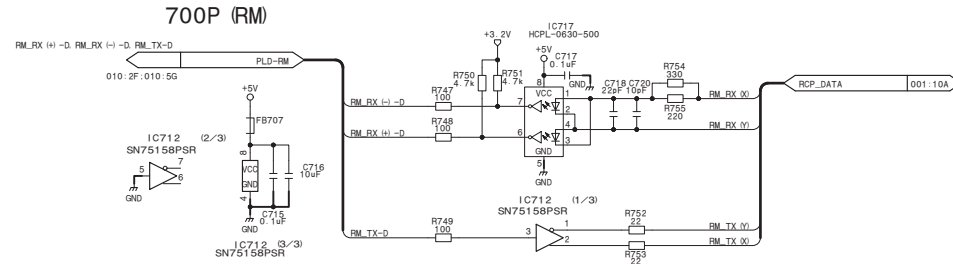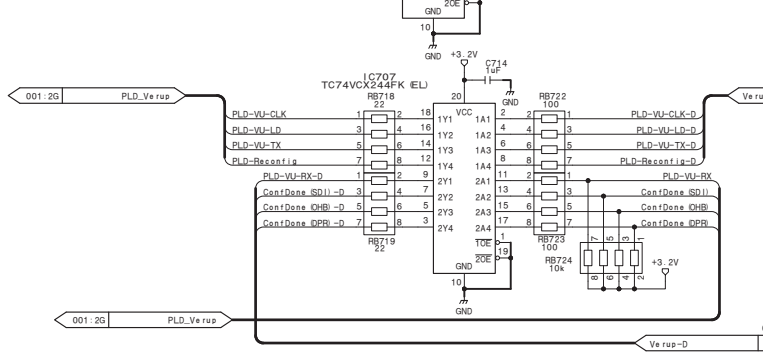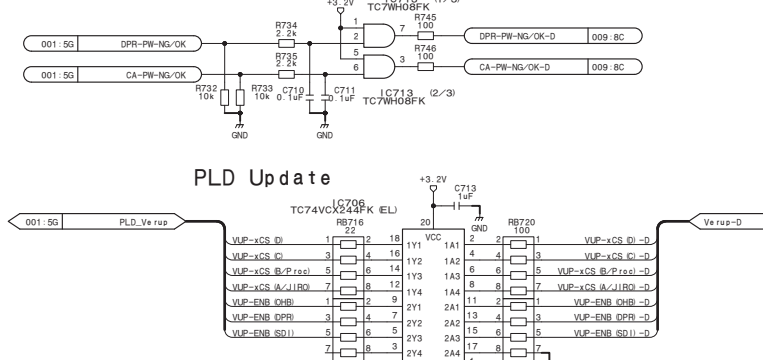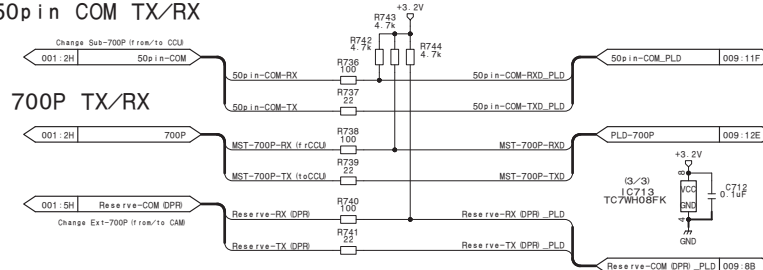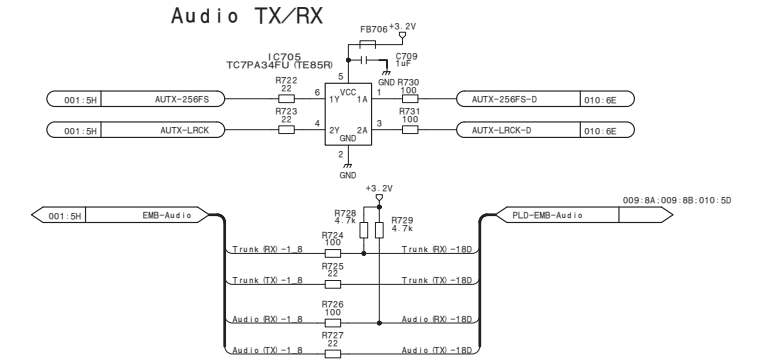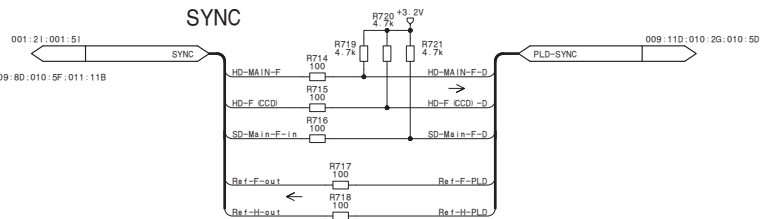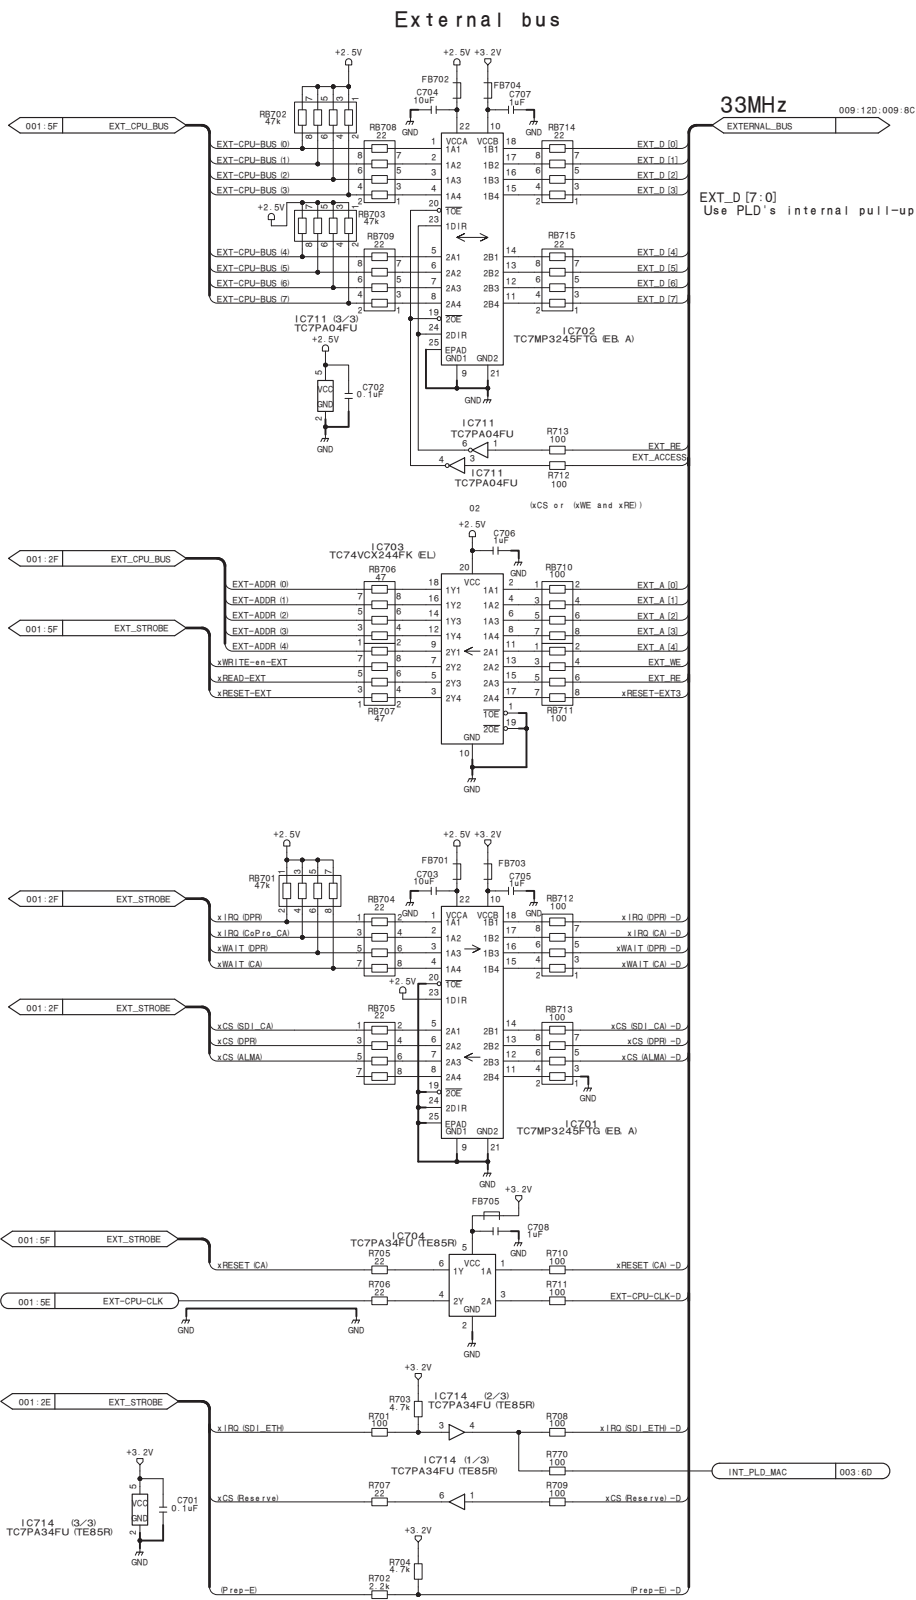

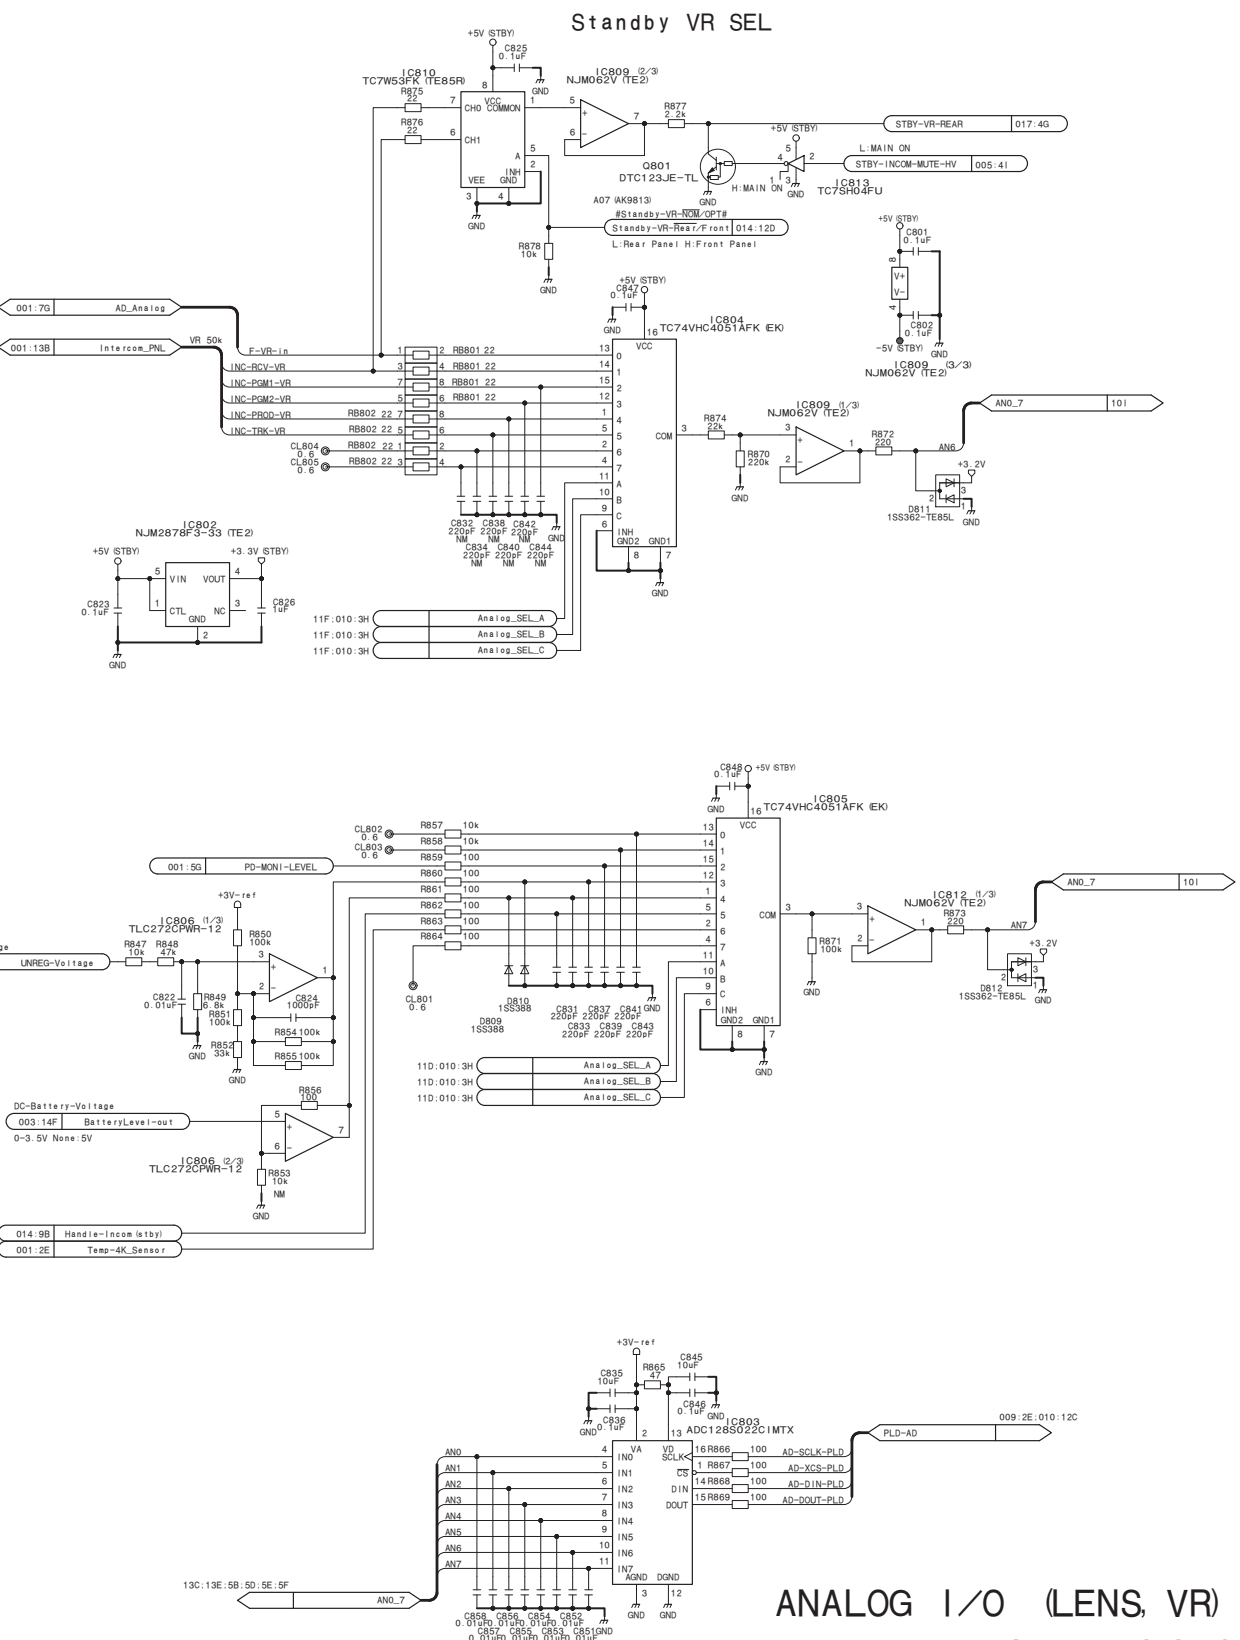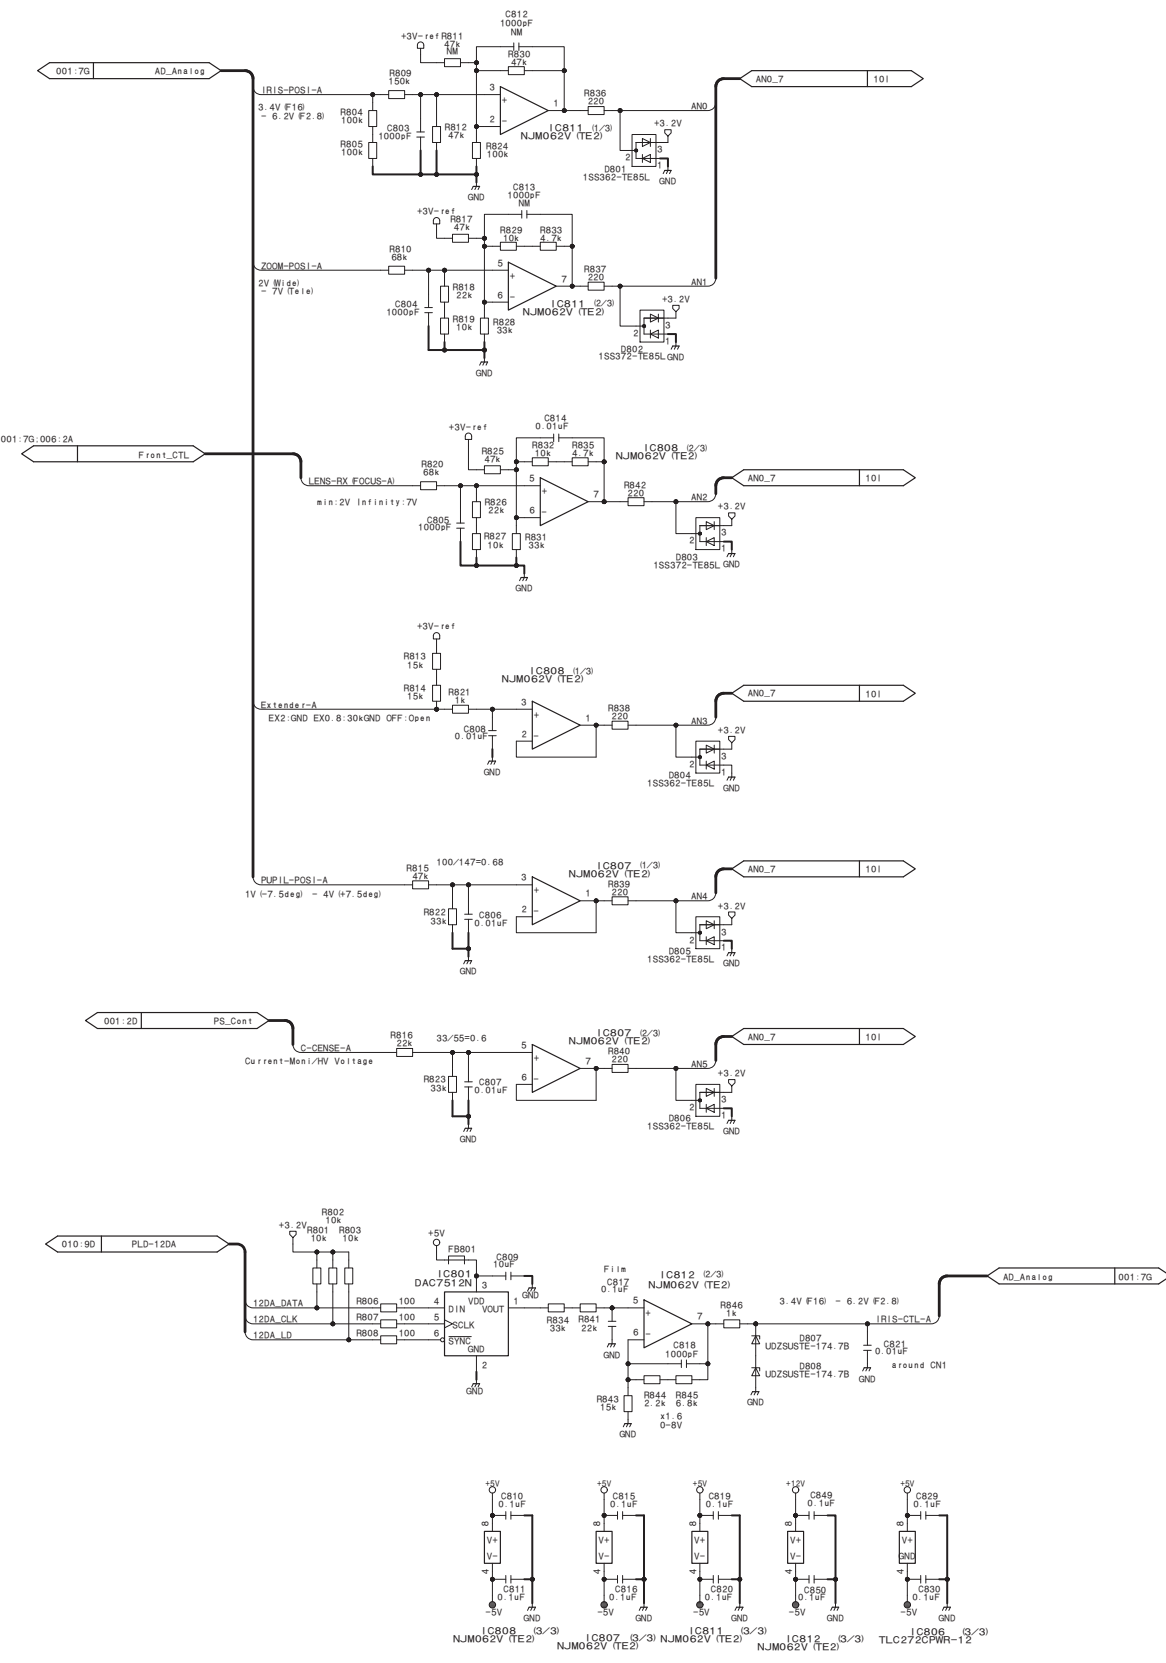






ANALOG I/O (LENS, VR)
SY-430 (8/19)
BOARD NO. 1-889-424-11
SY-430_8

SY-430 (9/19)

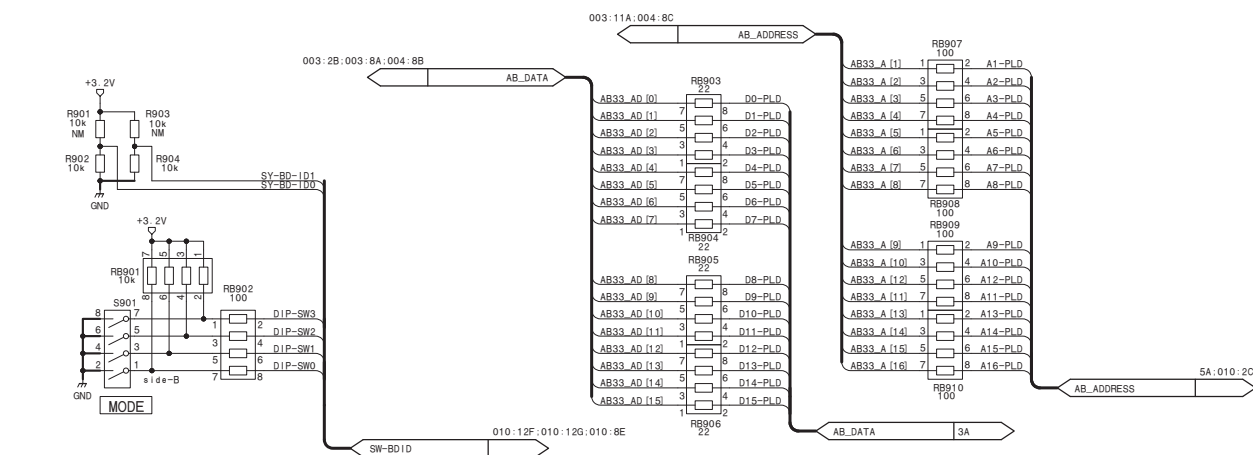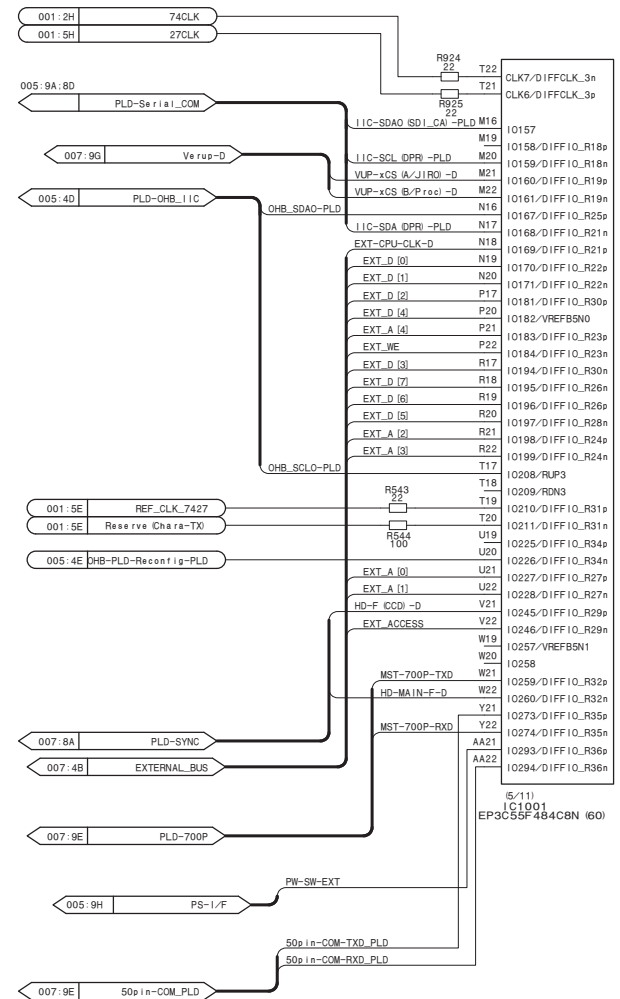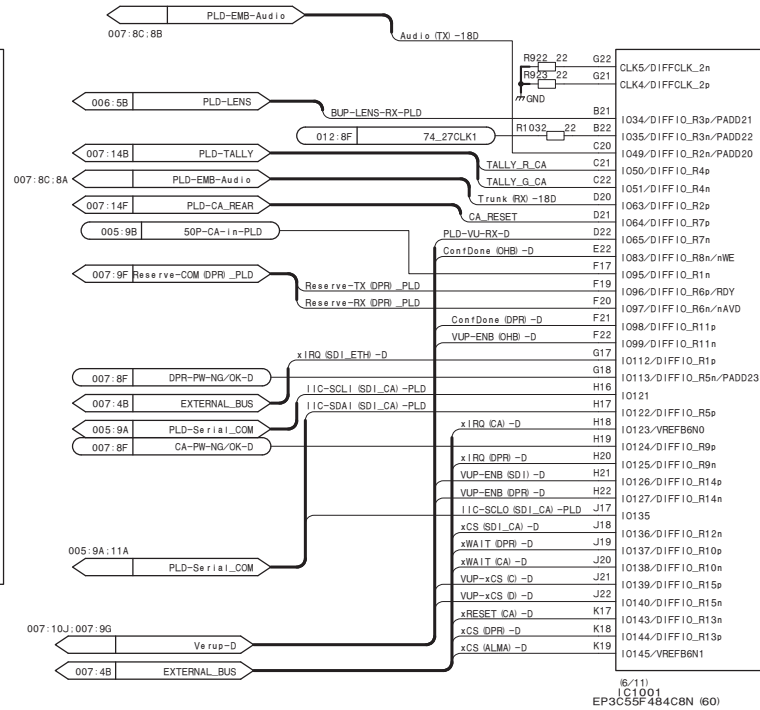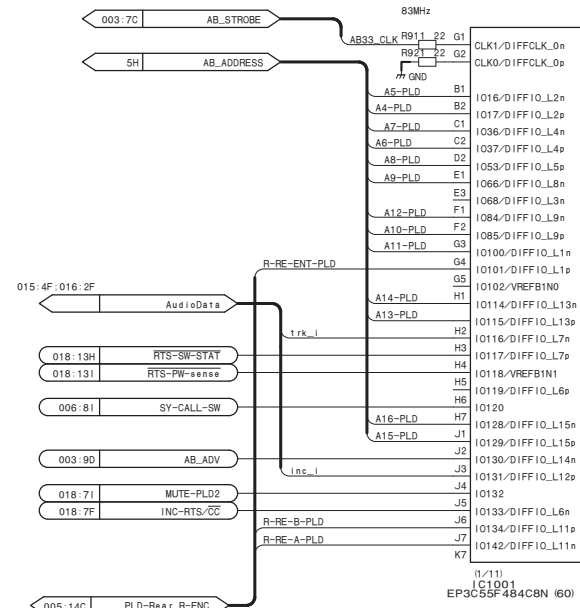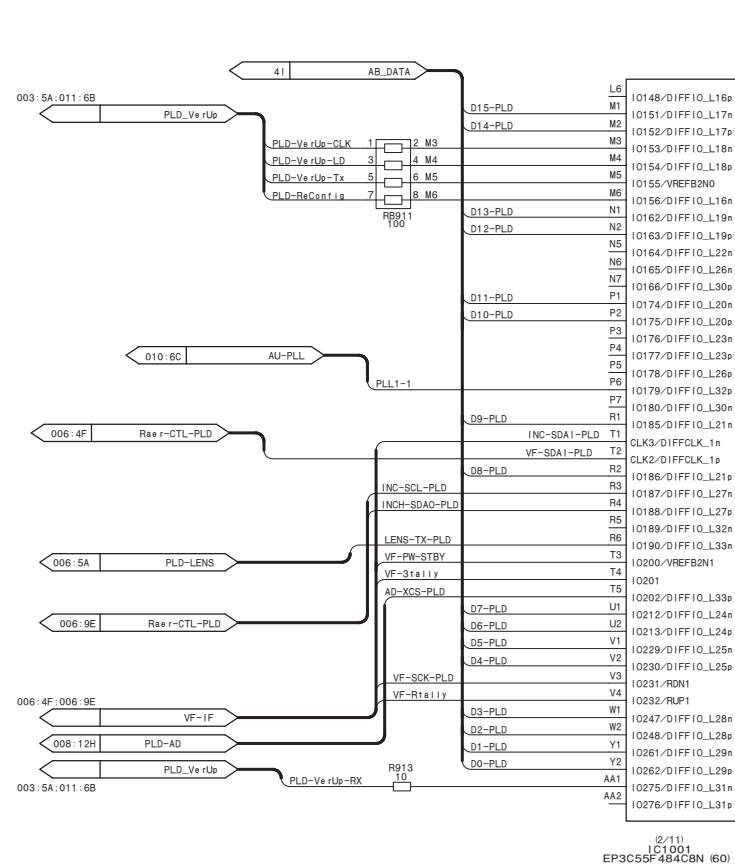

SY-PLD-1
SY-430 (9/19)
BOARD NO. 1-889-424-11
SY-430_9

SY-430 (10/19)

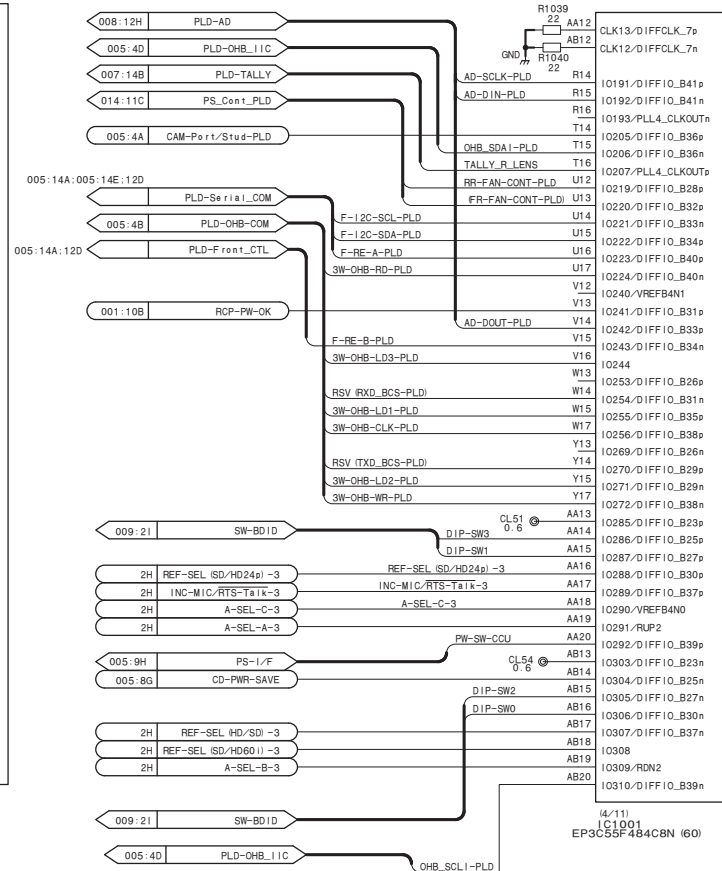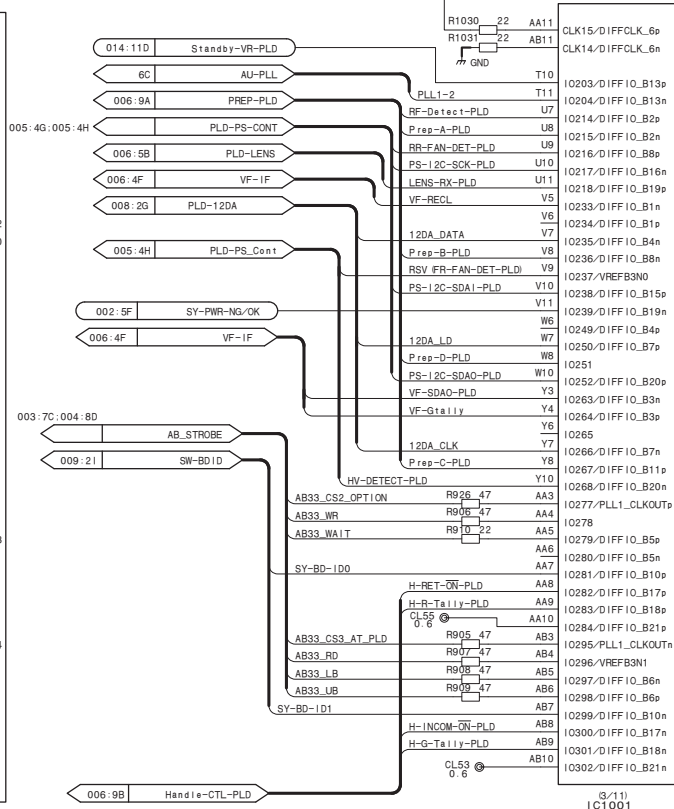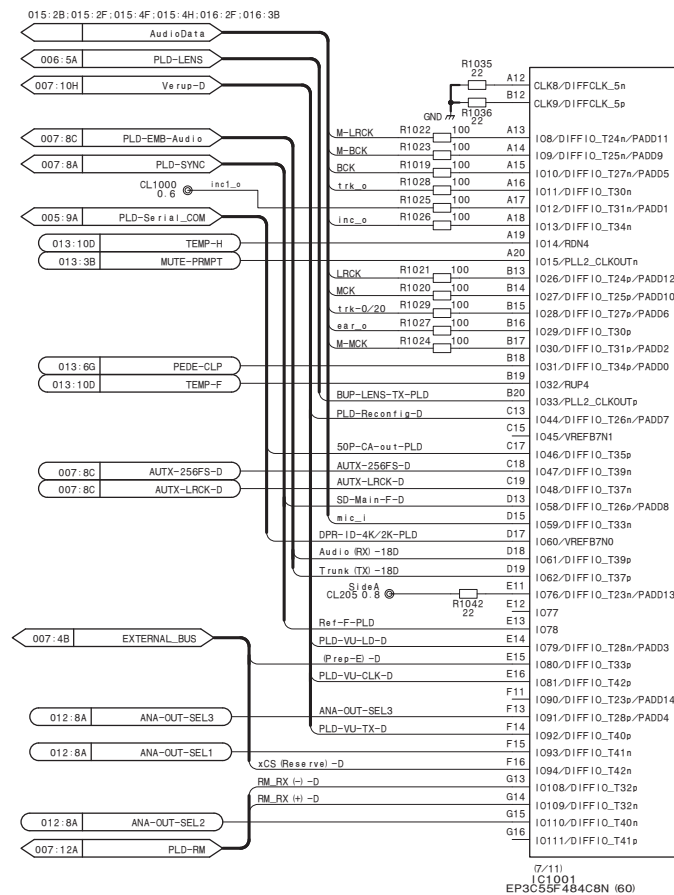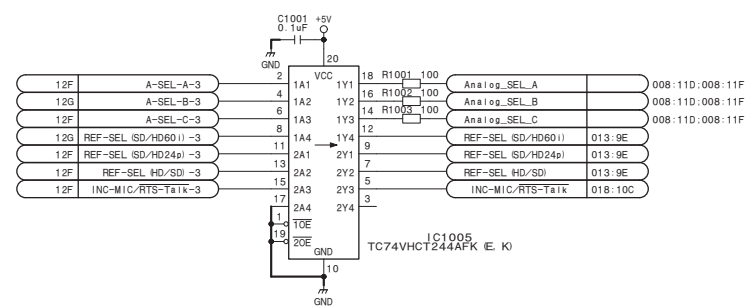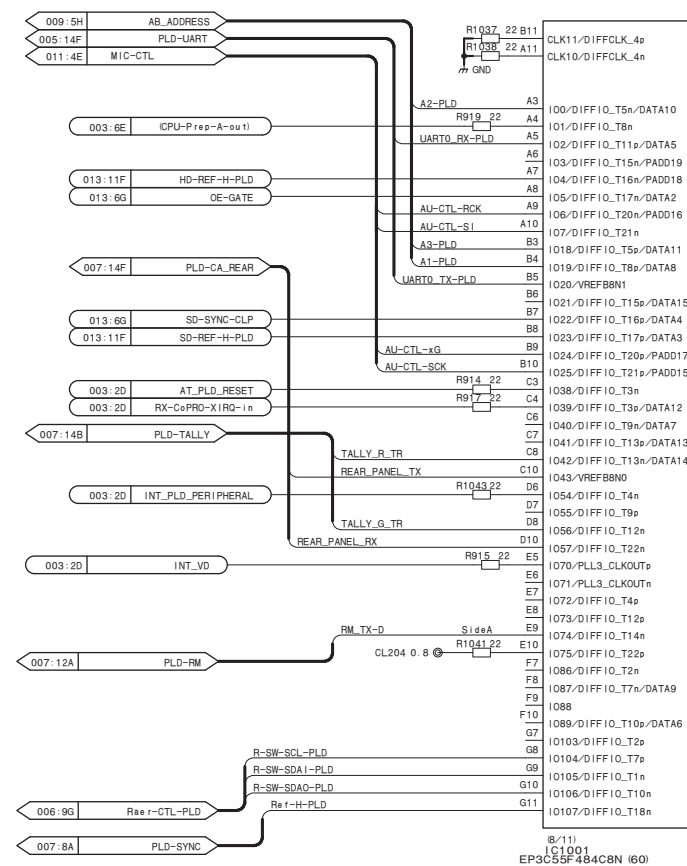


SY-PLD-2

SY-430 (10/19)


BOARD NO. 1-889-424-11
SY-430 10

SY-430 (11/19)


PLD Power

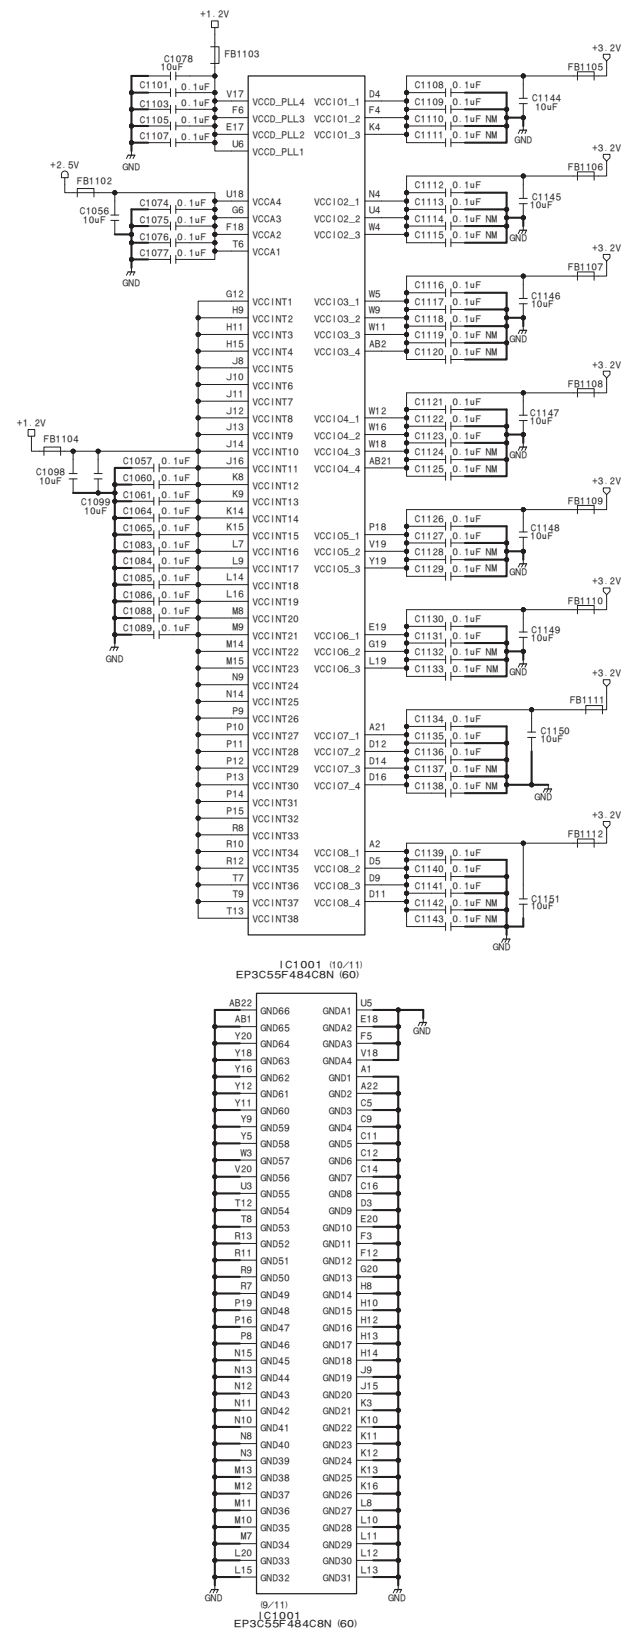

MIC, Intercom CTL

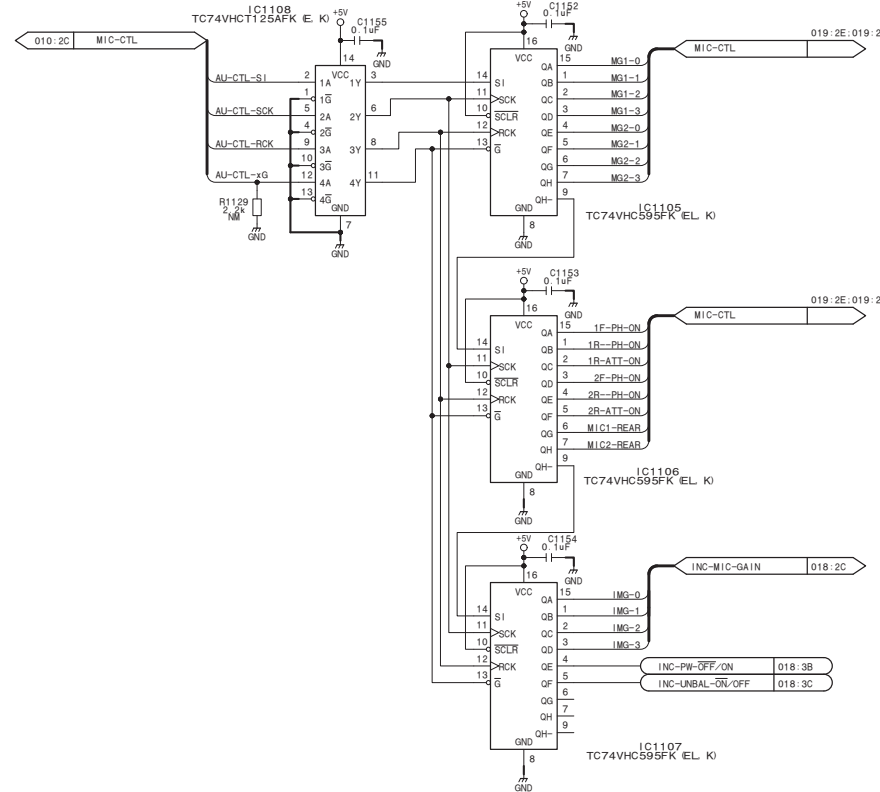

PLD CONFIG

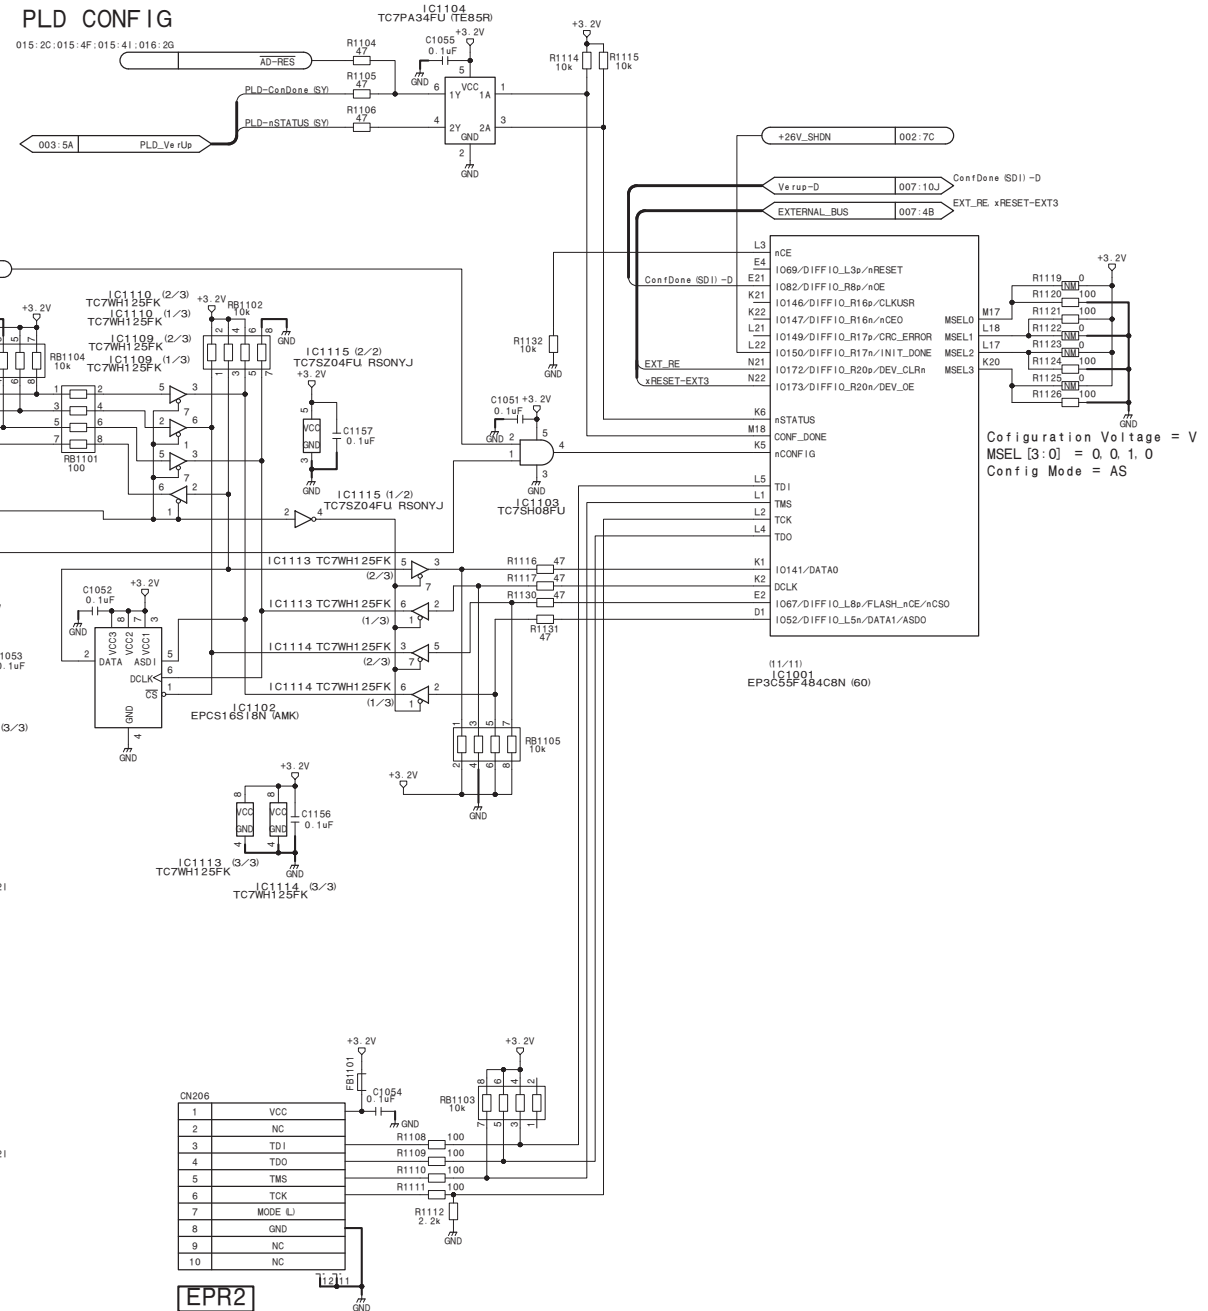


PLD CONFIG & Power

SY-430 (11/19)

BOARD NO. 1-889-424-11
SY-430_11

SY-430 (12/19)

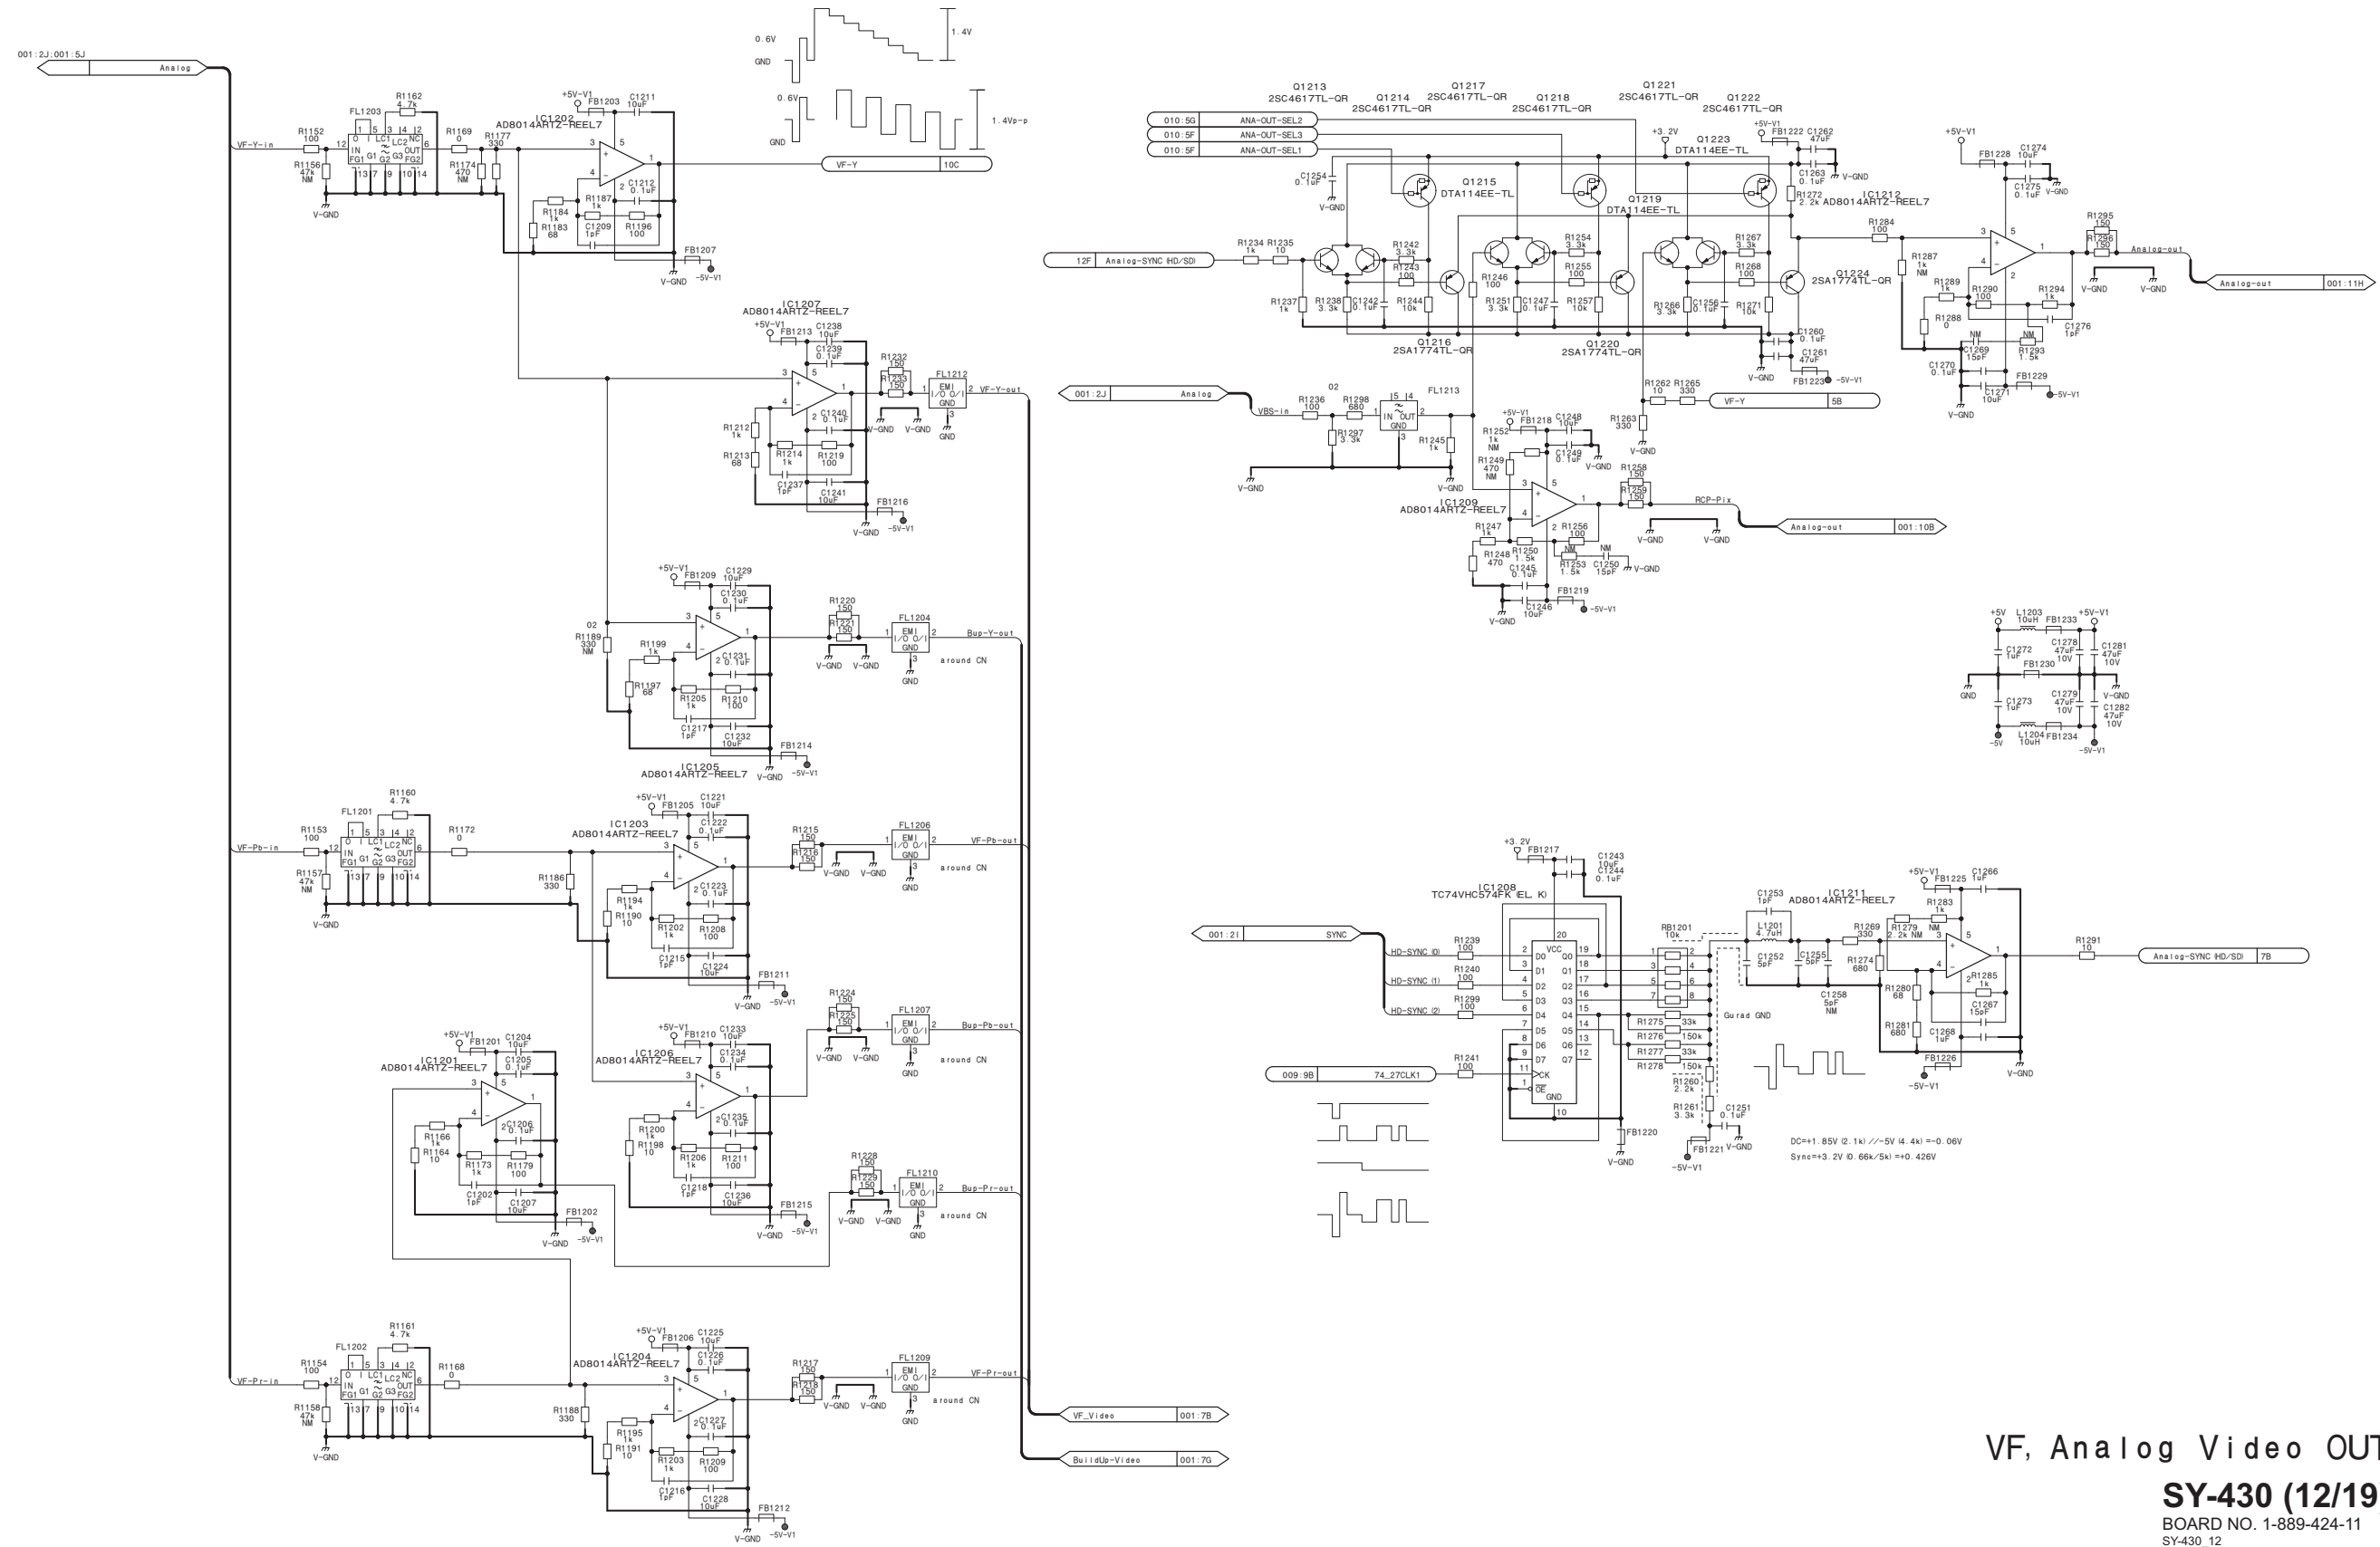


VF, Analog Video OUT



SY-430 (12/19)

BOARD NO. 1-889-424-11
SY-430_12


SY-430 (13/19)

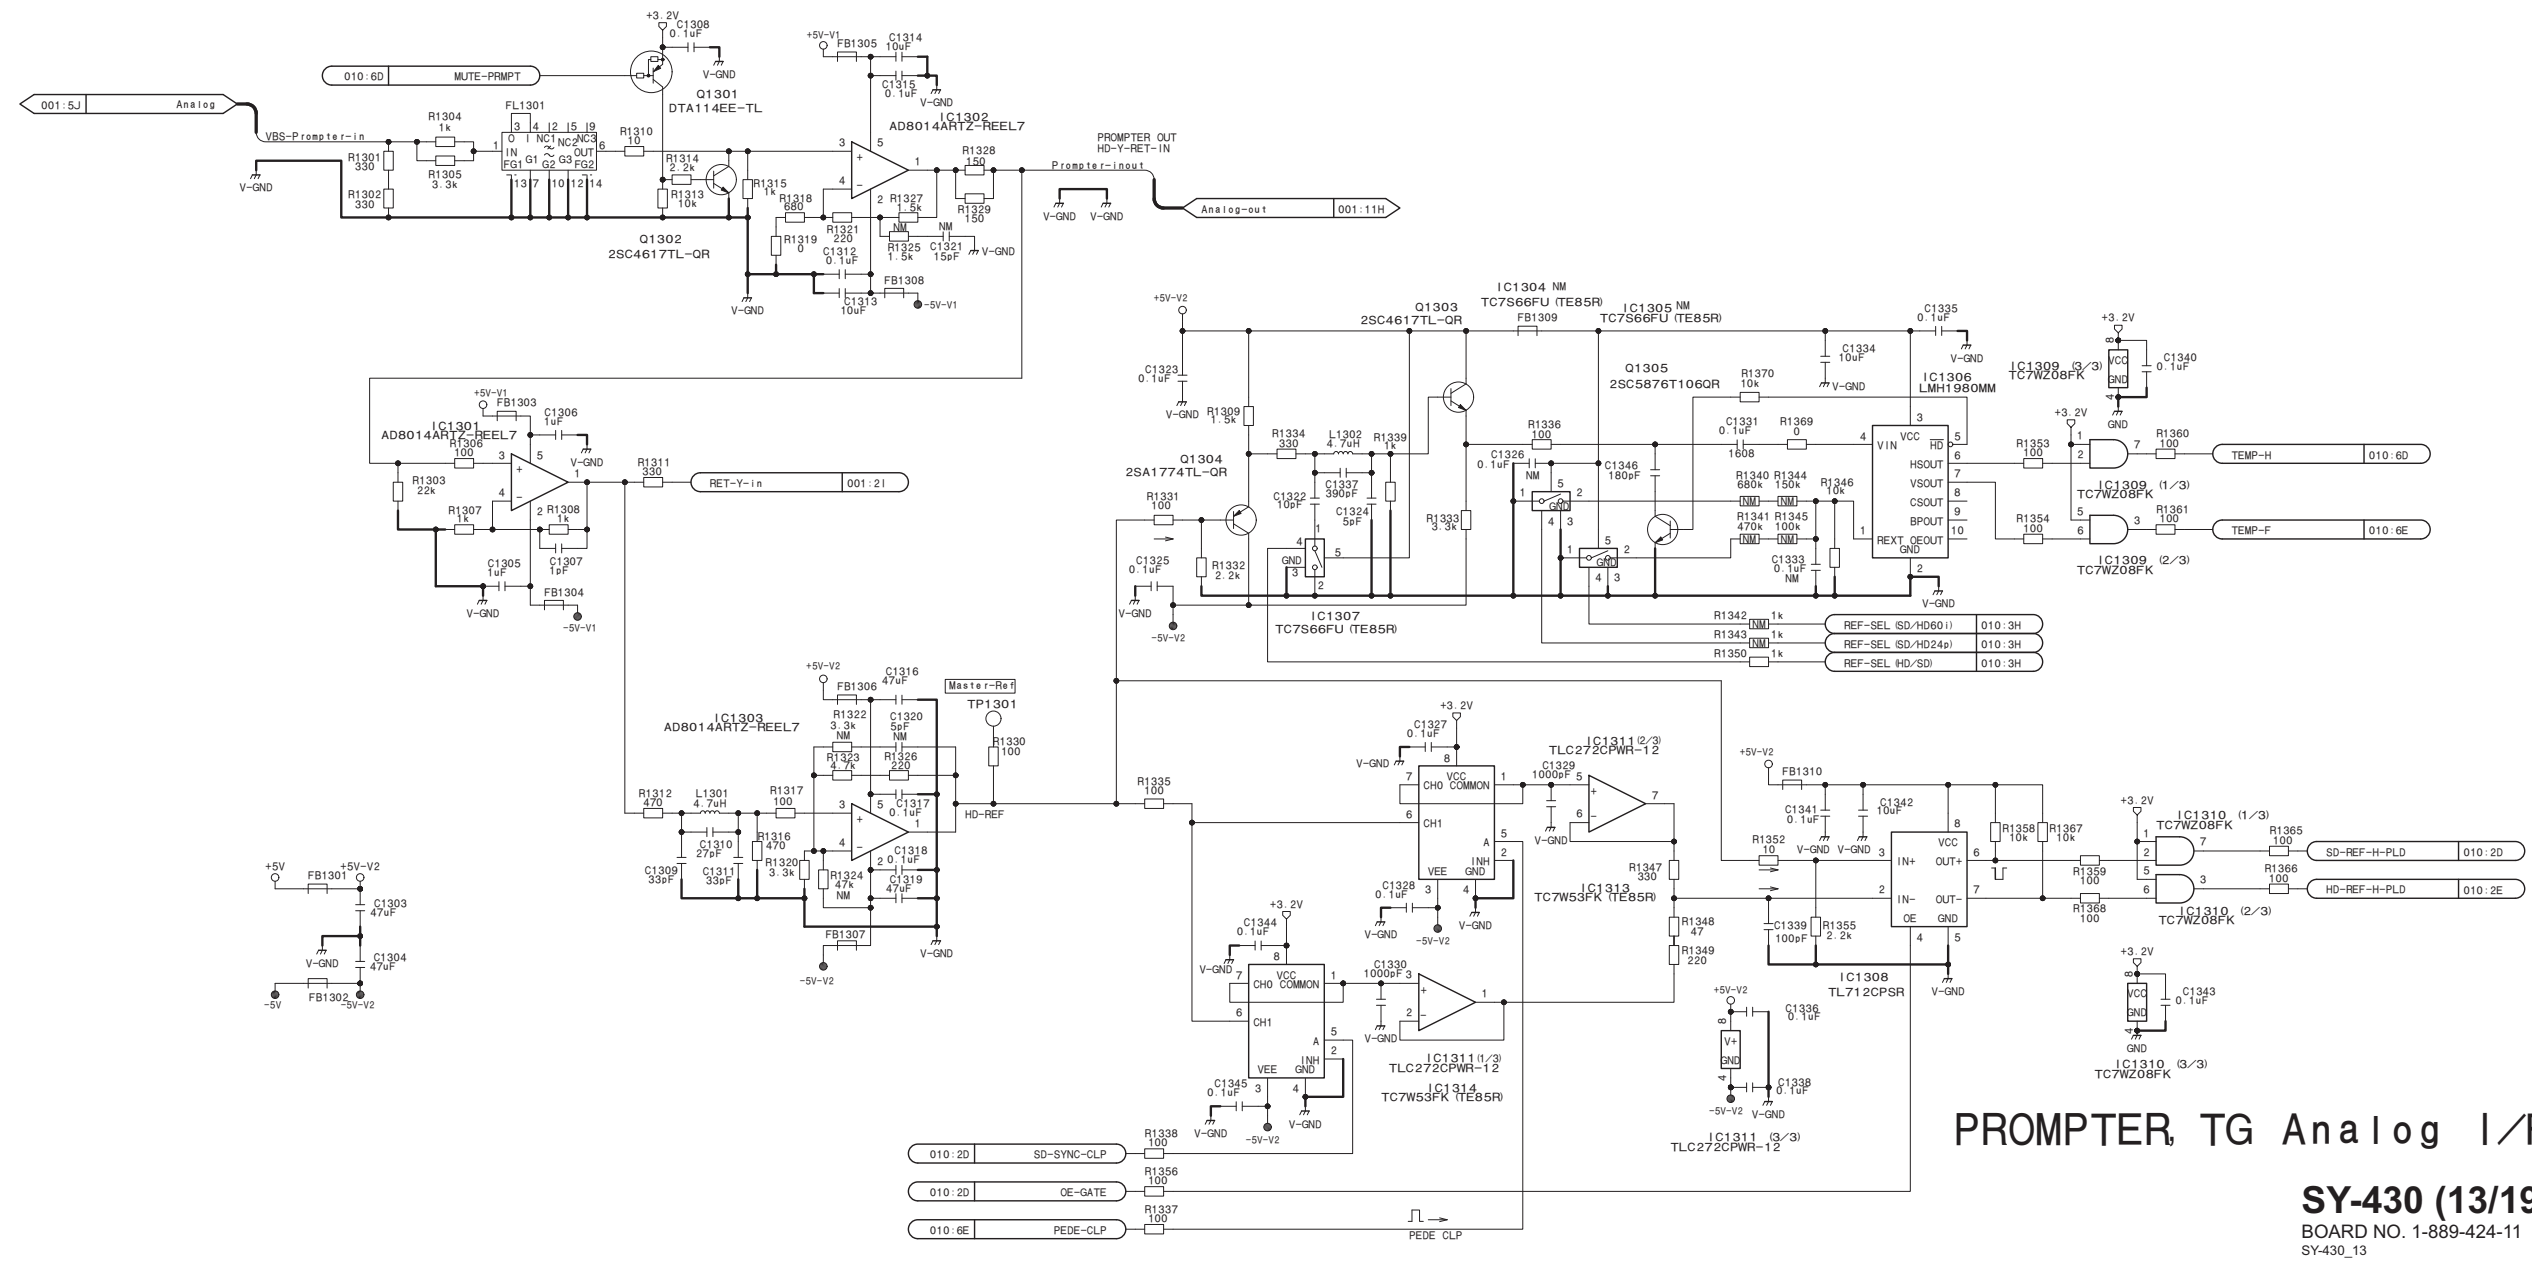


Standby CTL

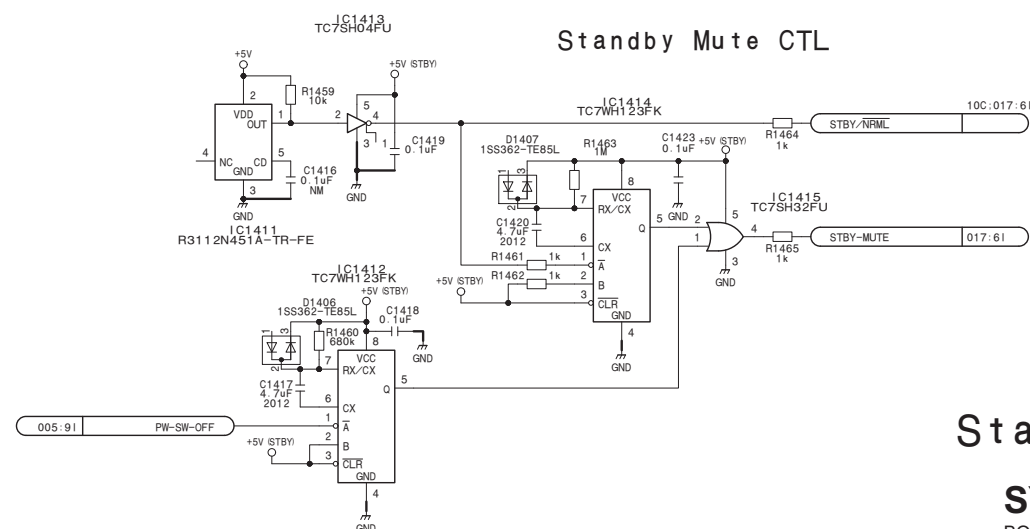

BOARD NO. 1-889-424-11
SY-430_14

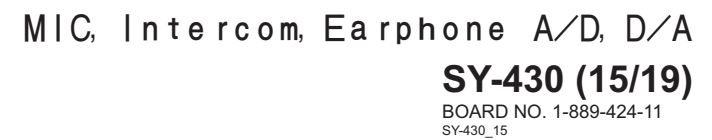

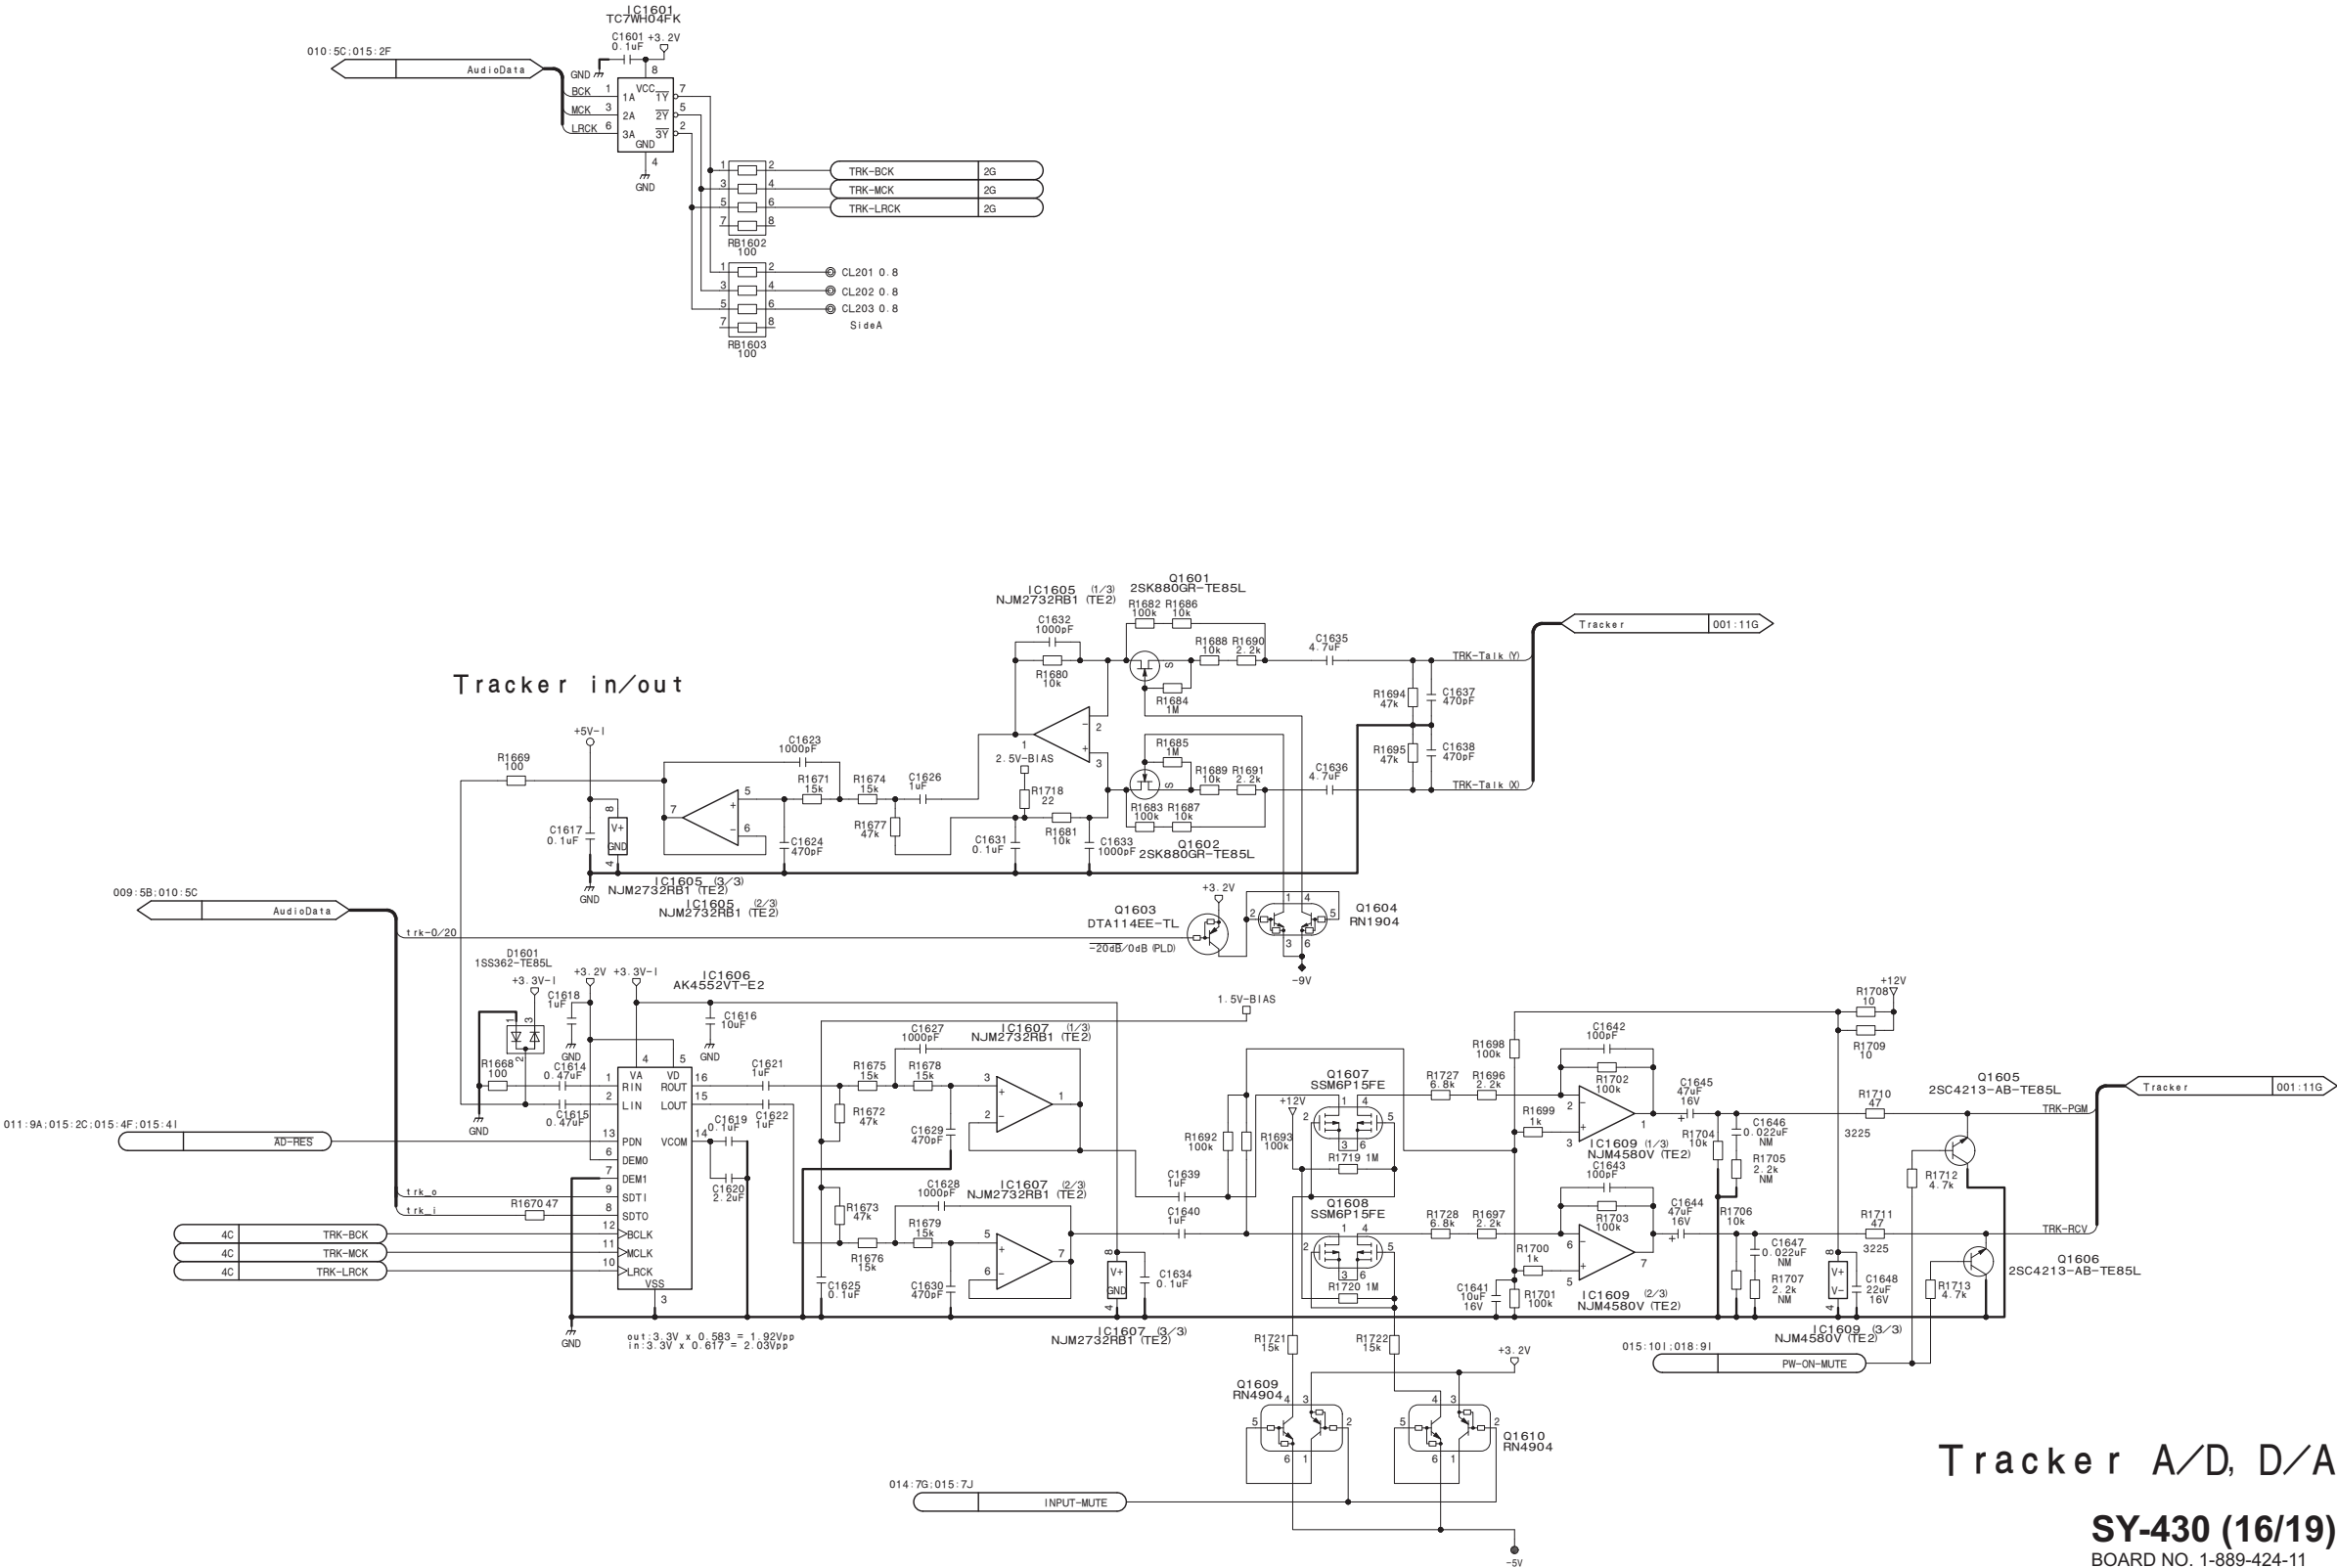


Tracker A/D, D/A

SY-430 (16/19)


BOARD NO. 1-889-424-11

SY-430_16


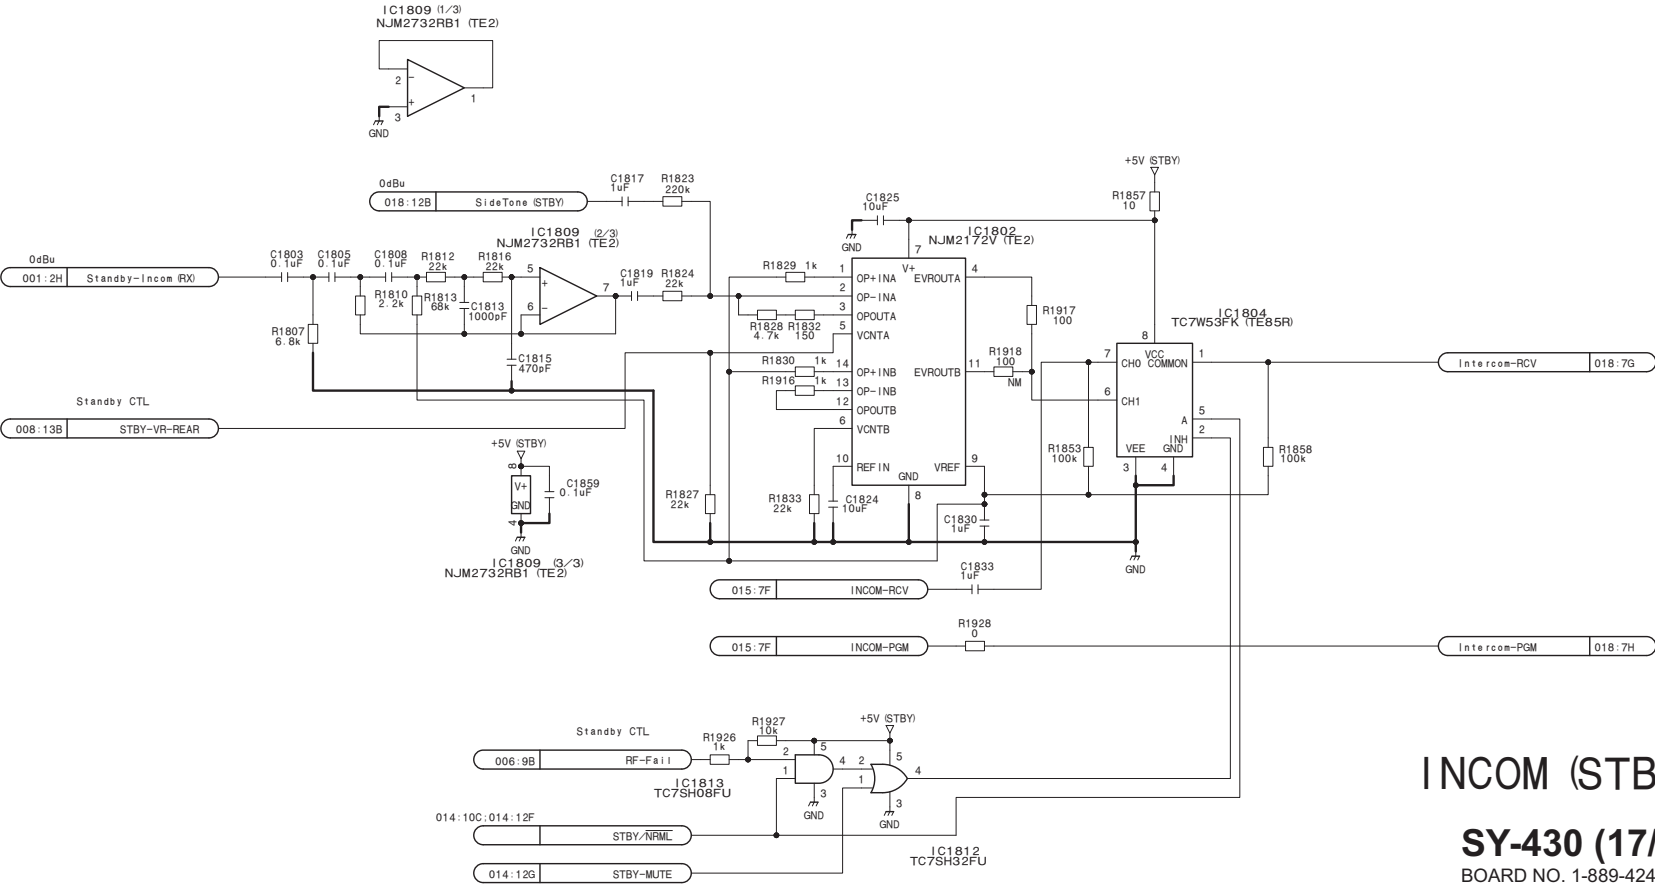


INCOM (STBY)

SY-430 (17/19)
BOARD NO. 1-889-424-11
SY-430_17

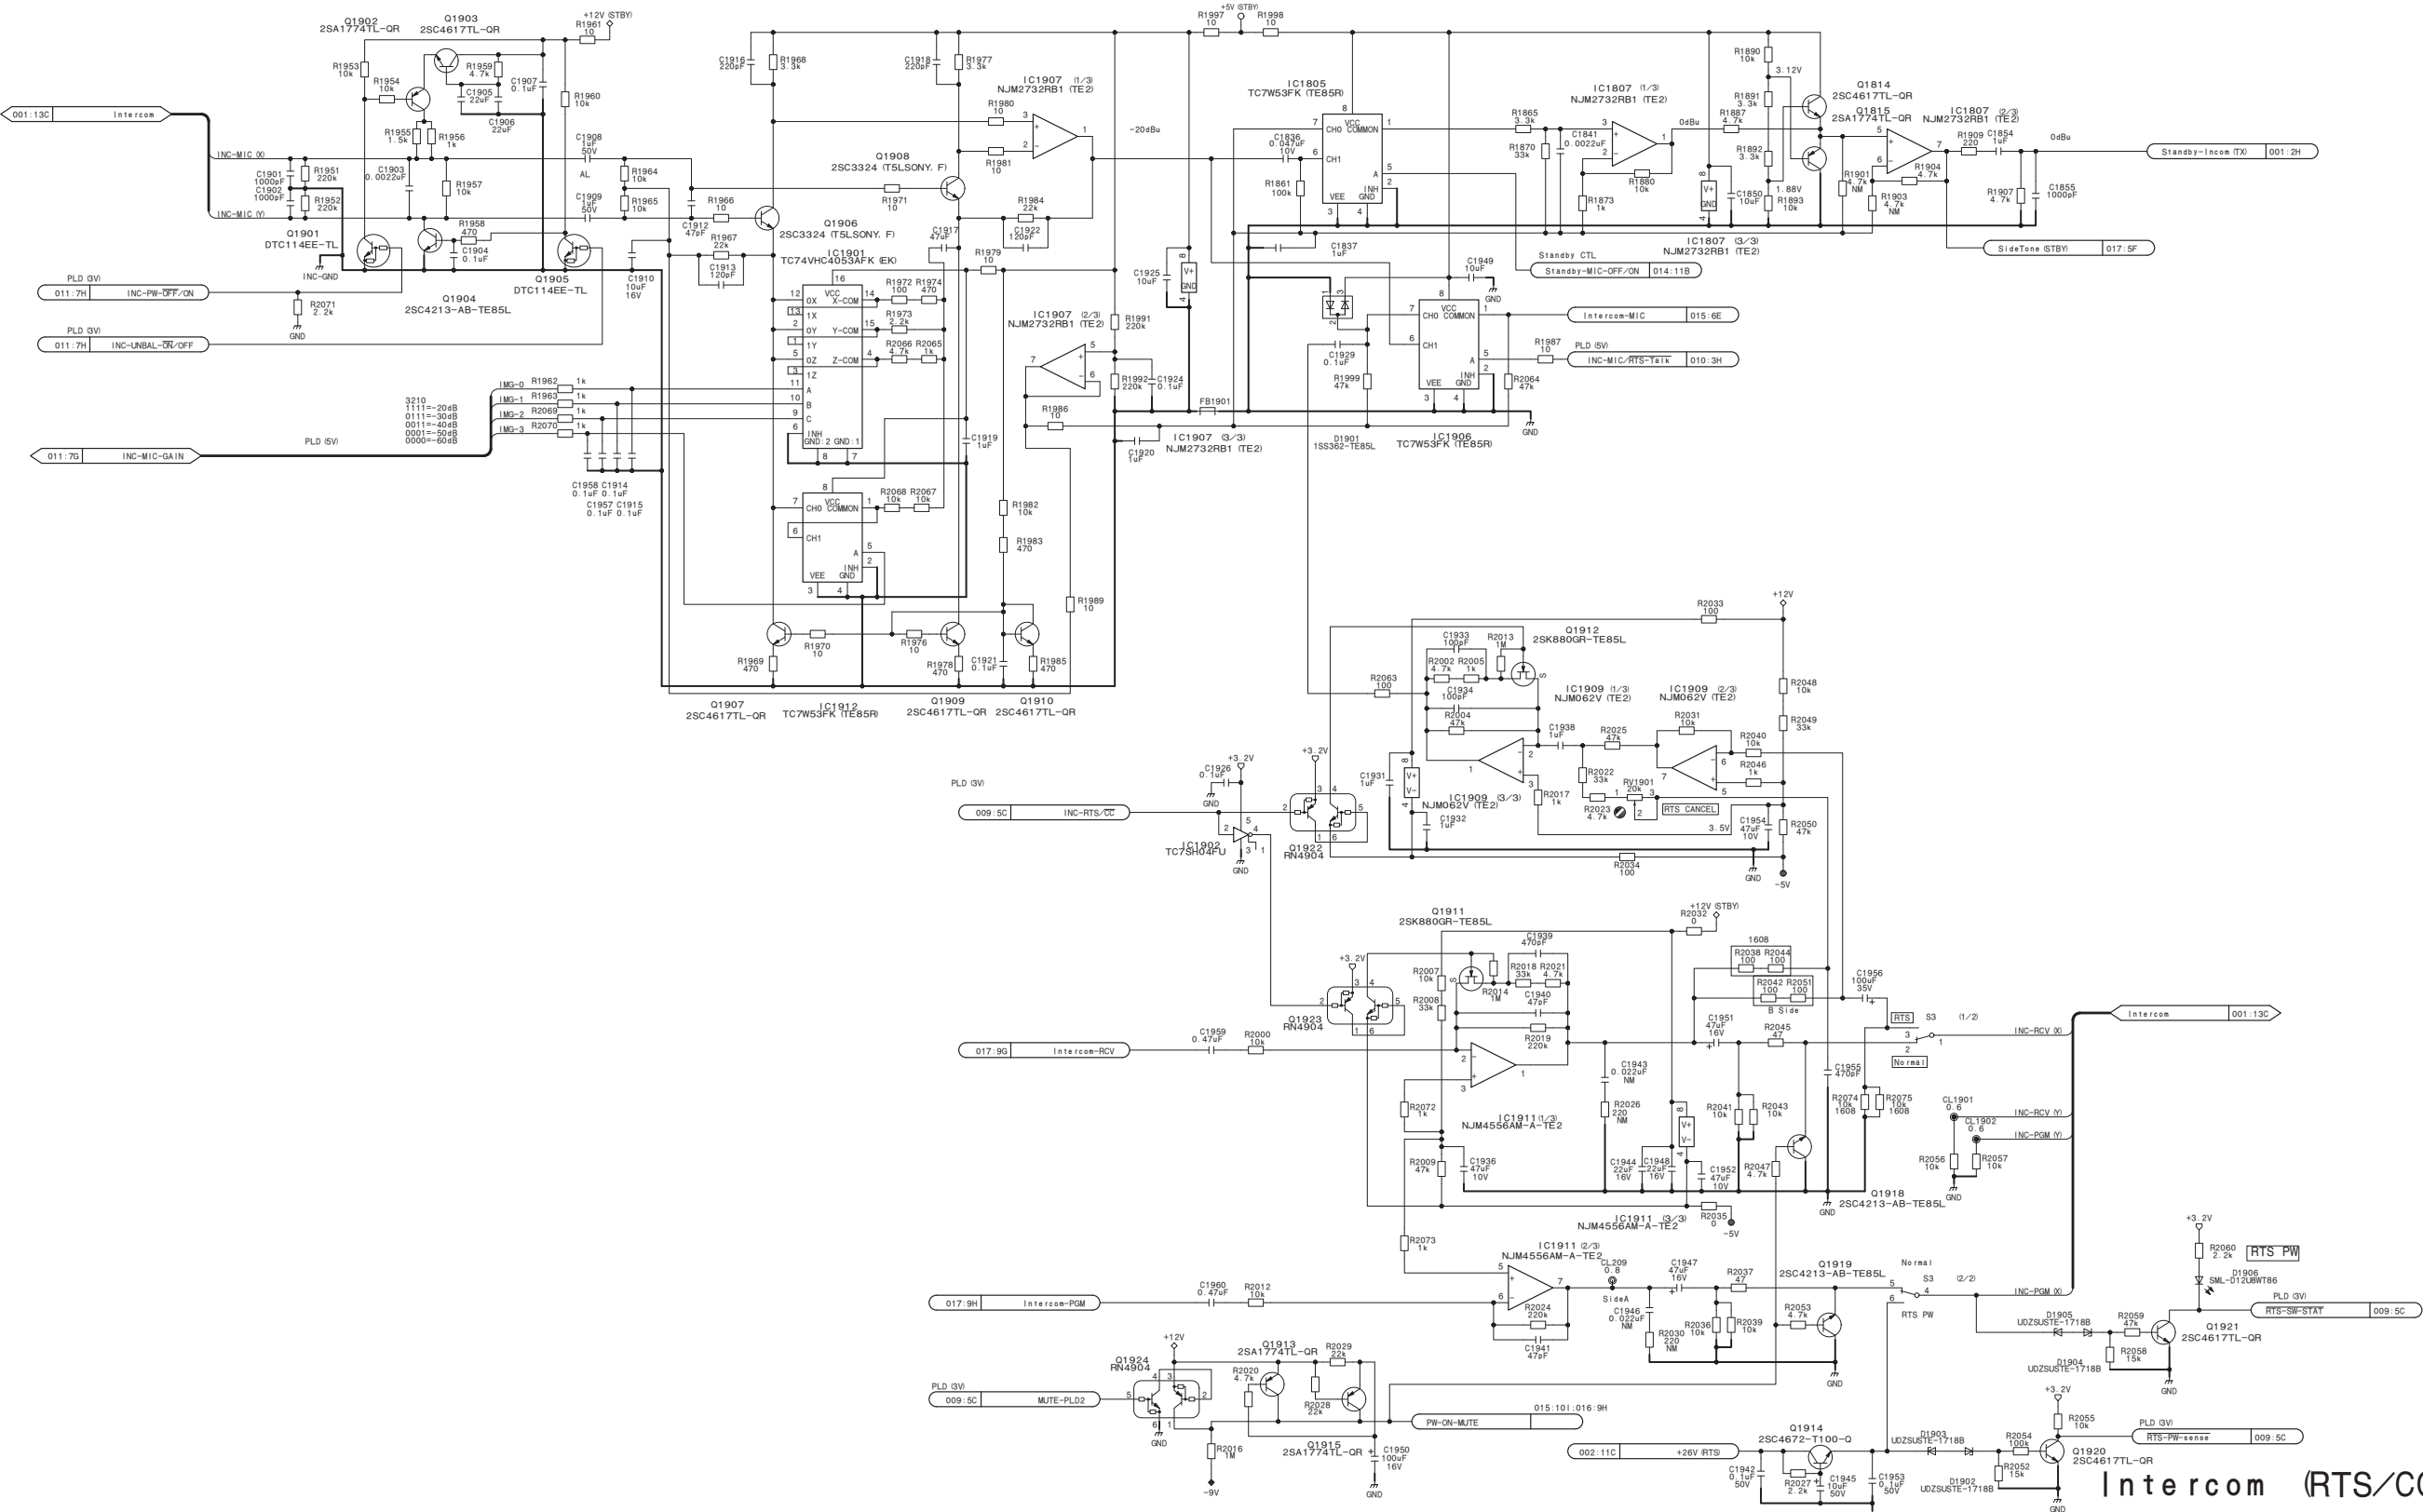

Intercom (RTS/CC)
SY-430 (18/19)
BOARD NO. 1-889-424-11
SY-430_18

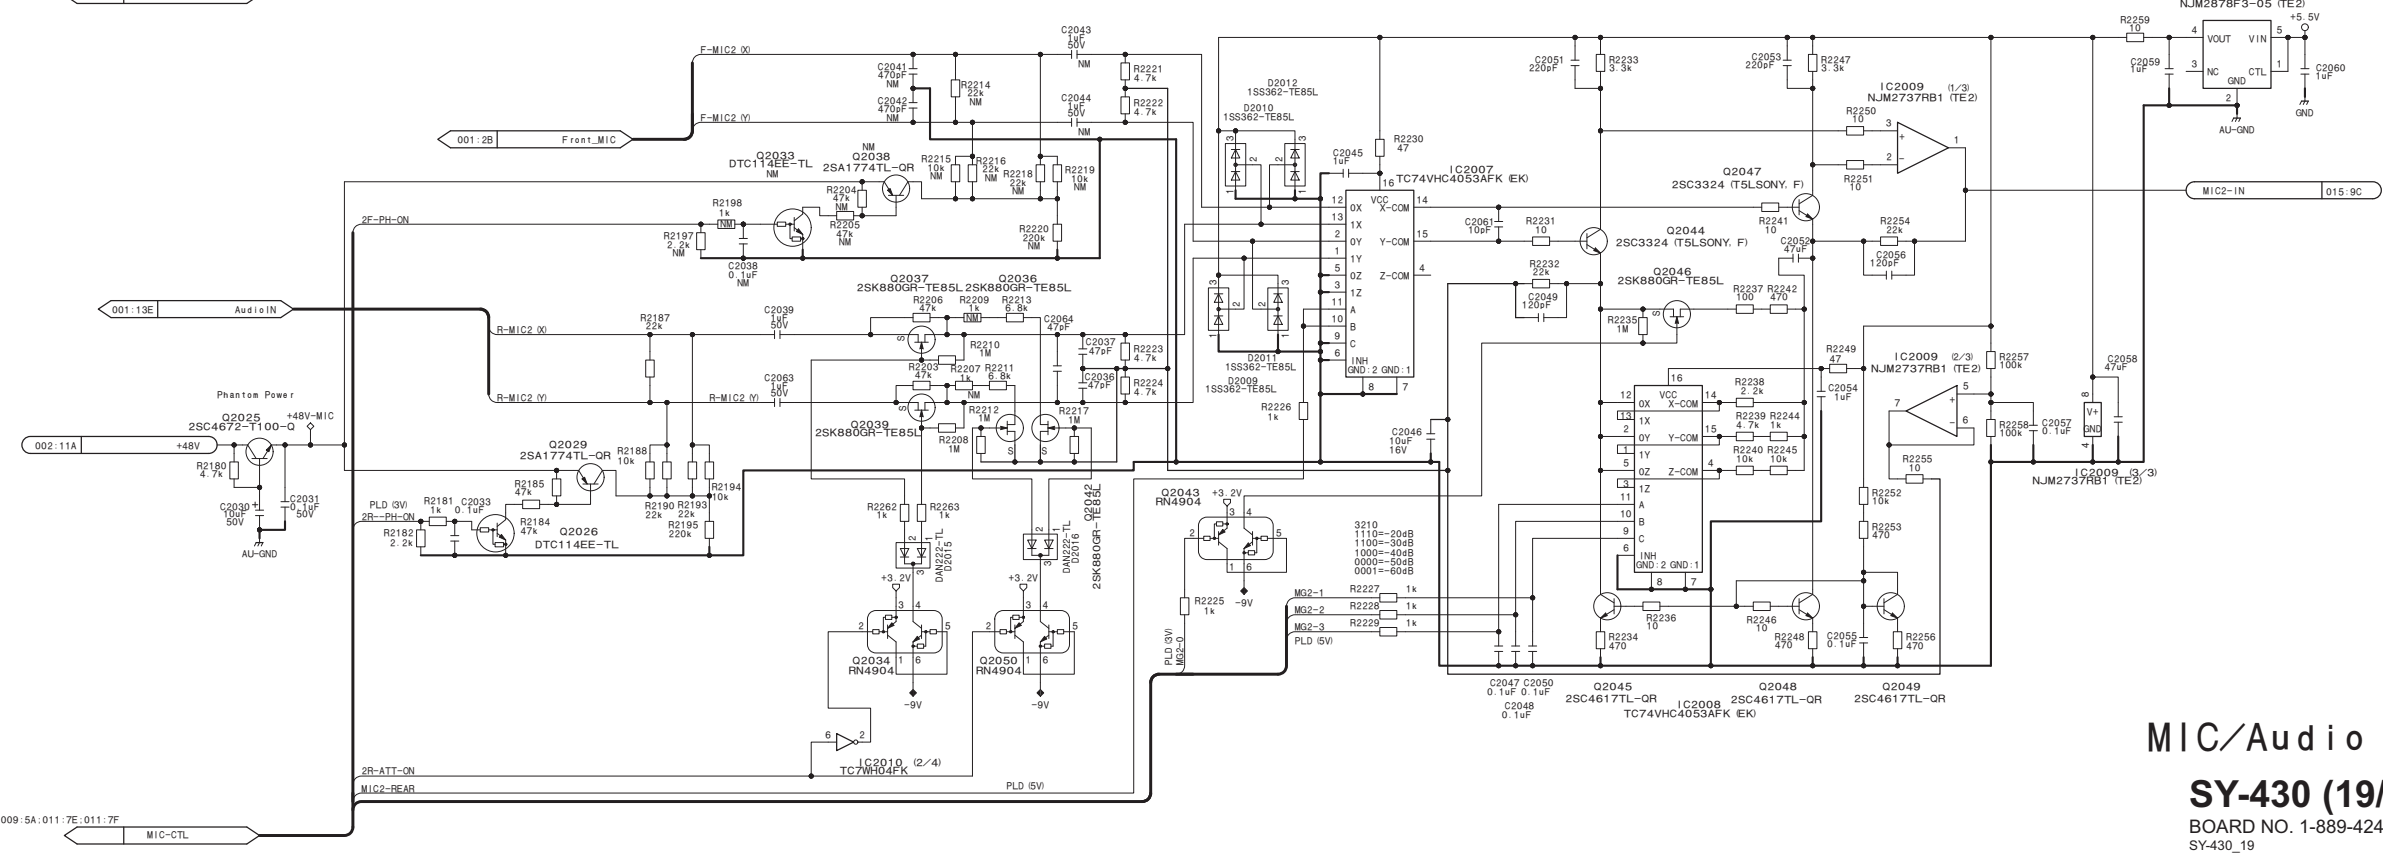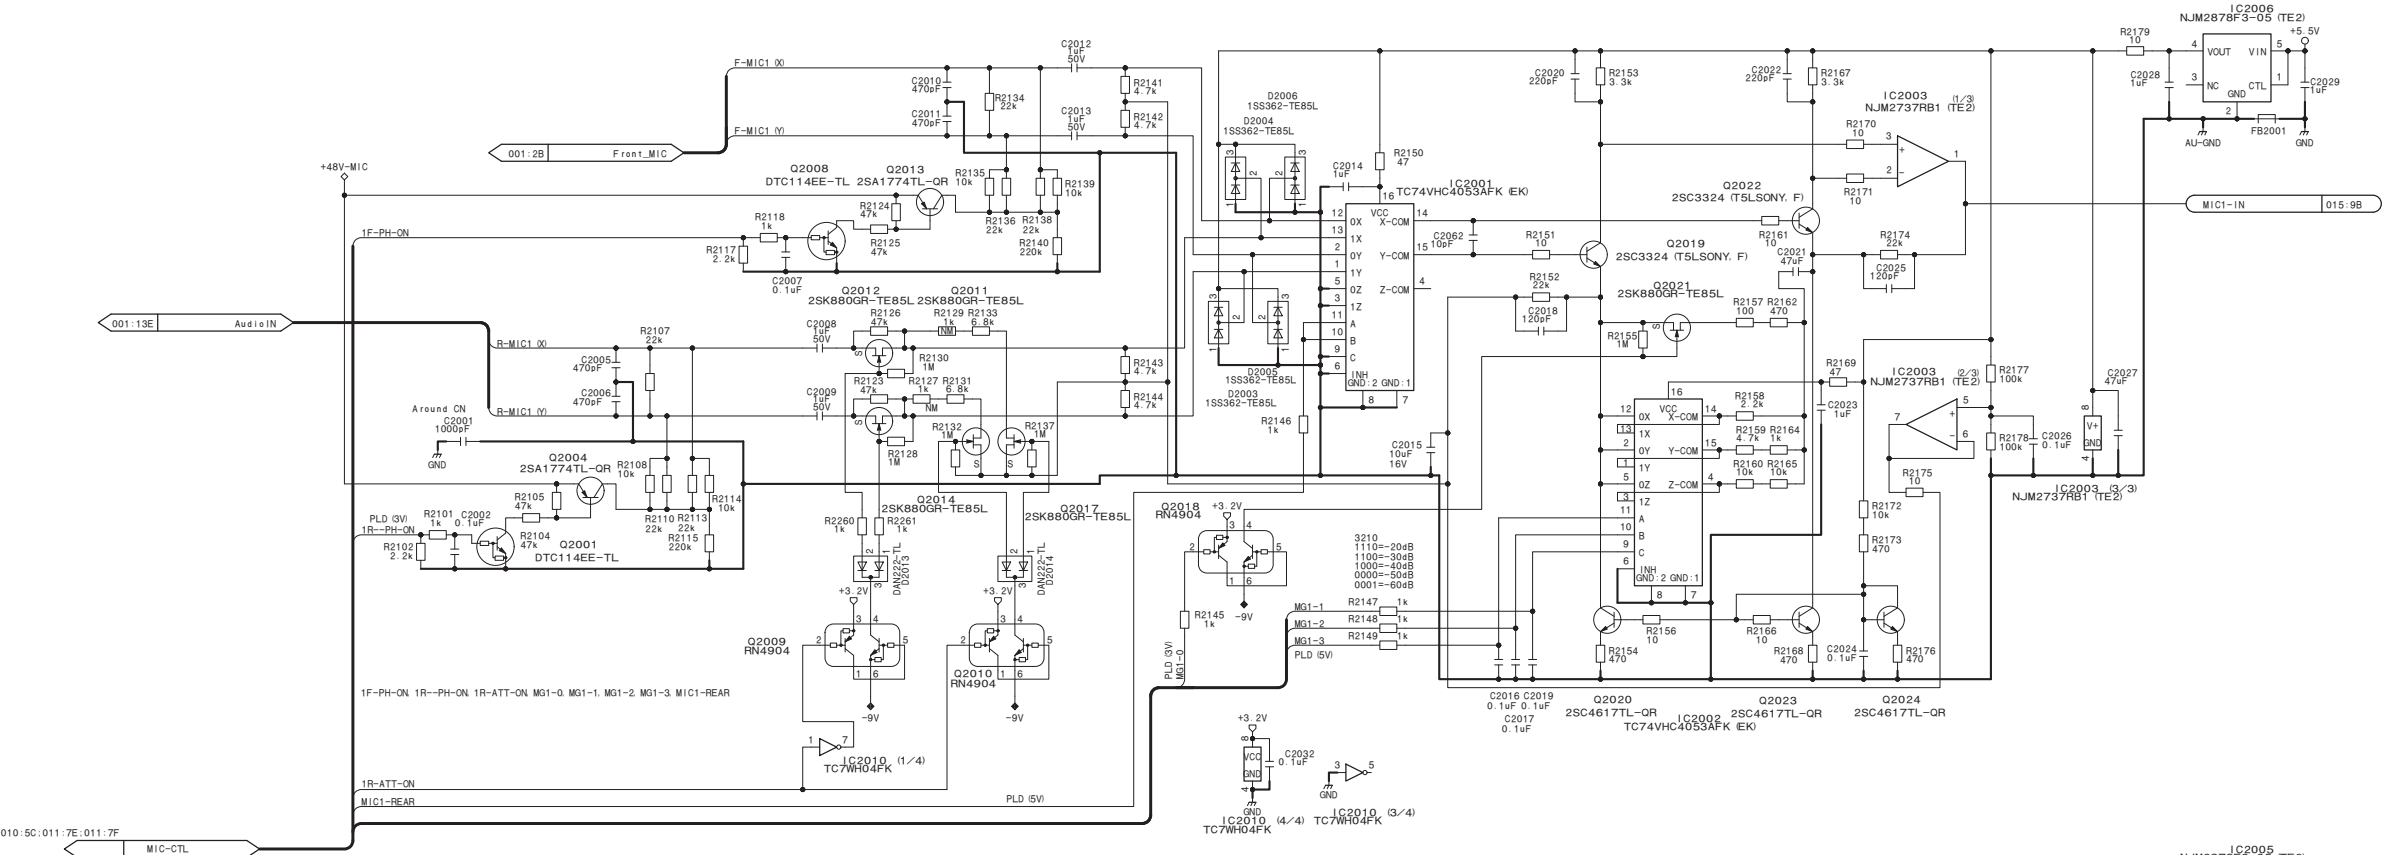


MIC/Audio IN

SY-430 (19/19)



BOARD NO. 1-889-424-11

SY-430_19


TG-285
TG-285 (1/2)_L

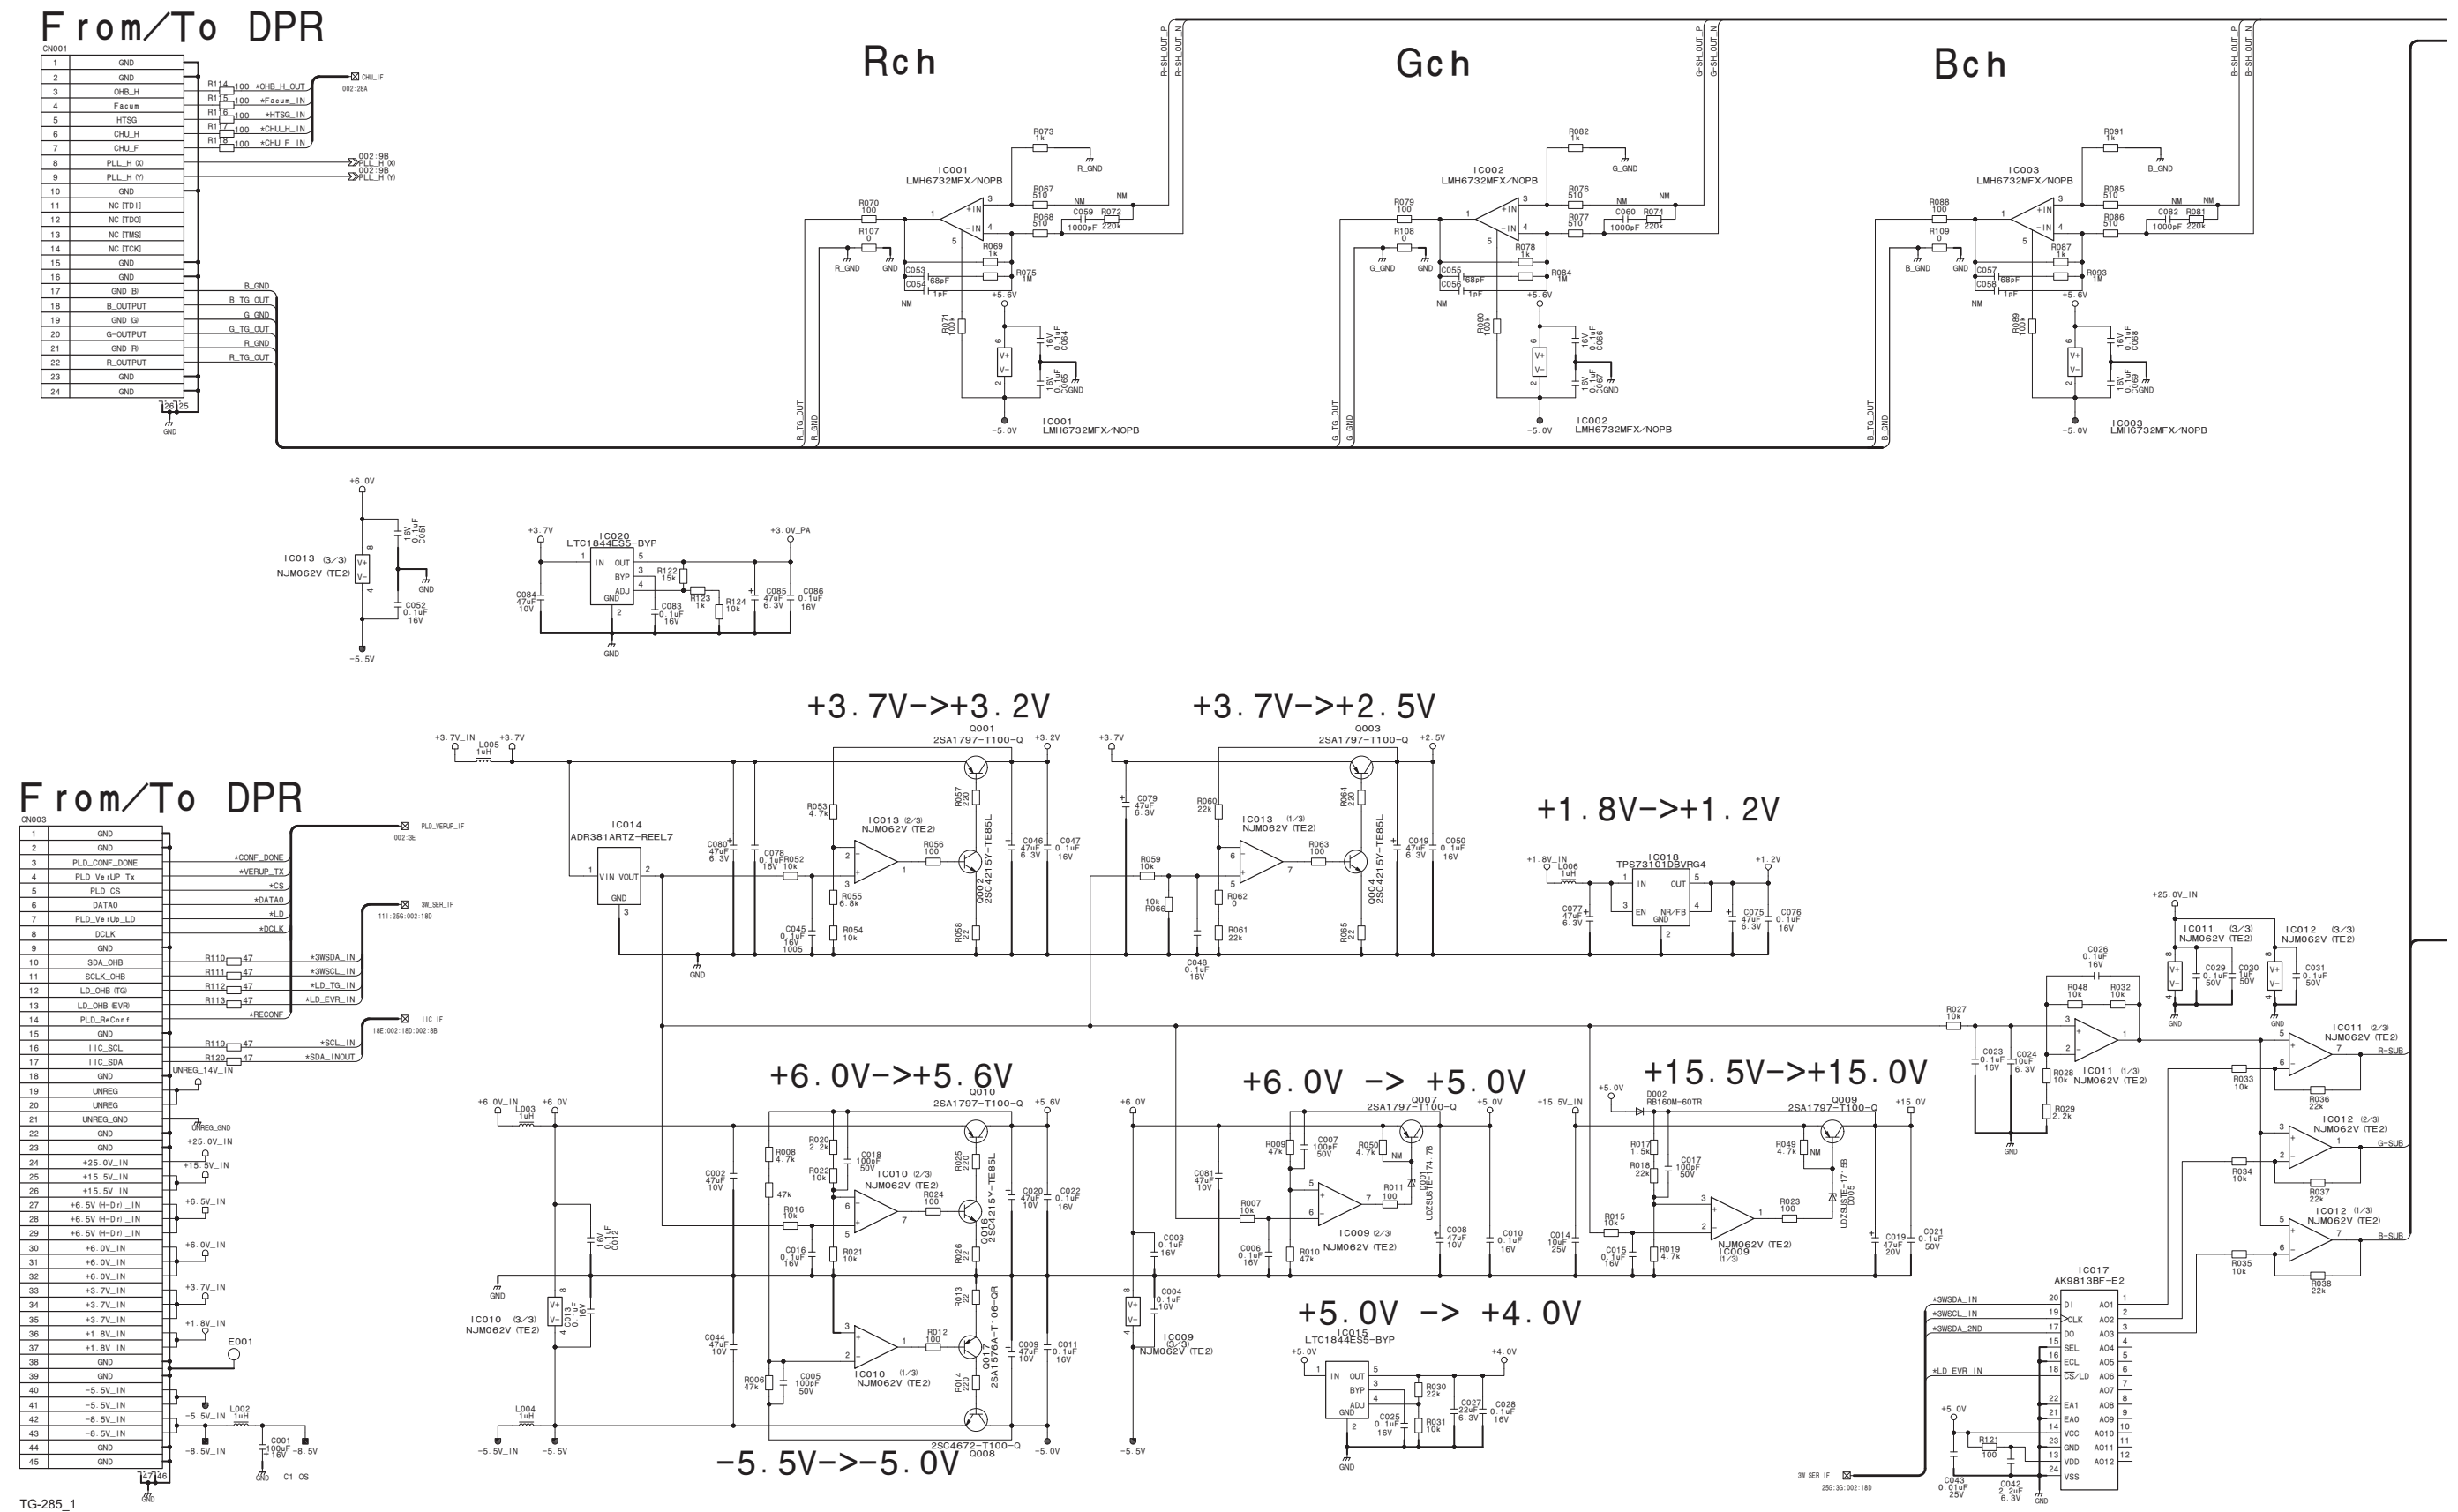

TG-285 (1/2)_R

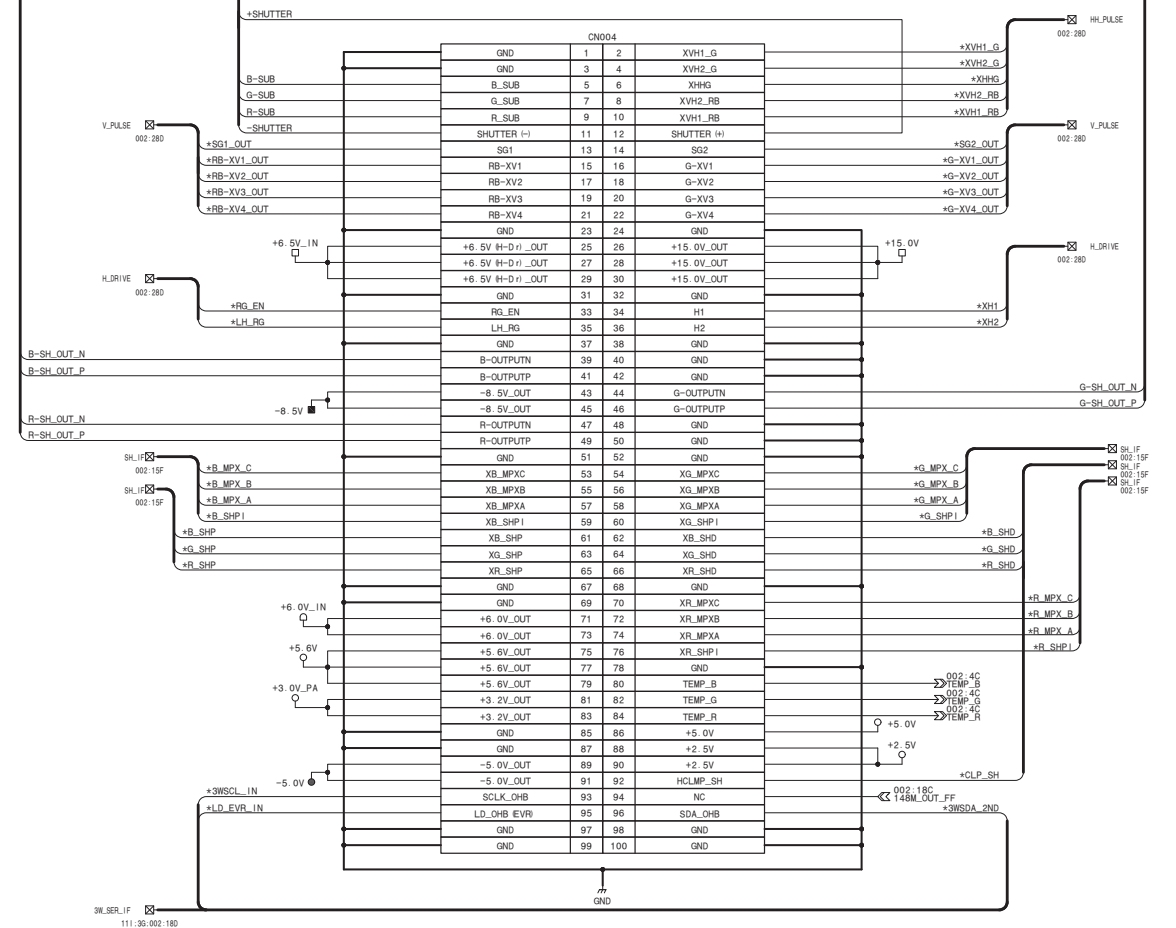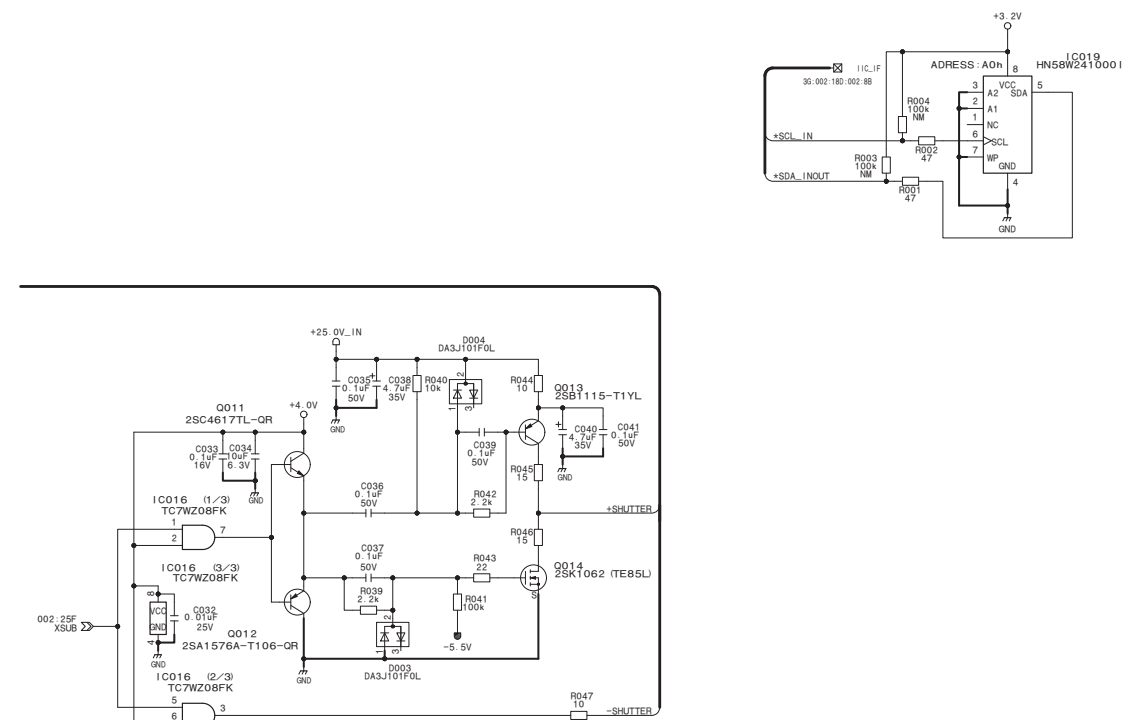


From/To DR




TG-285 (1/2)
BOARD NO. 1-889-420-11
TG-285_1

TG-285 (2/2)_L

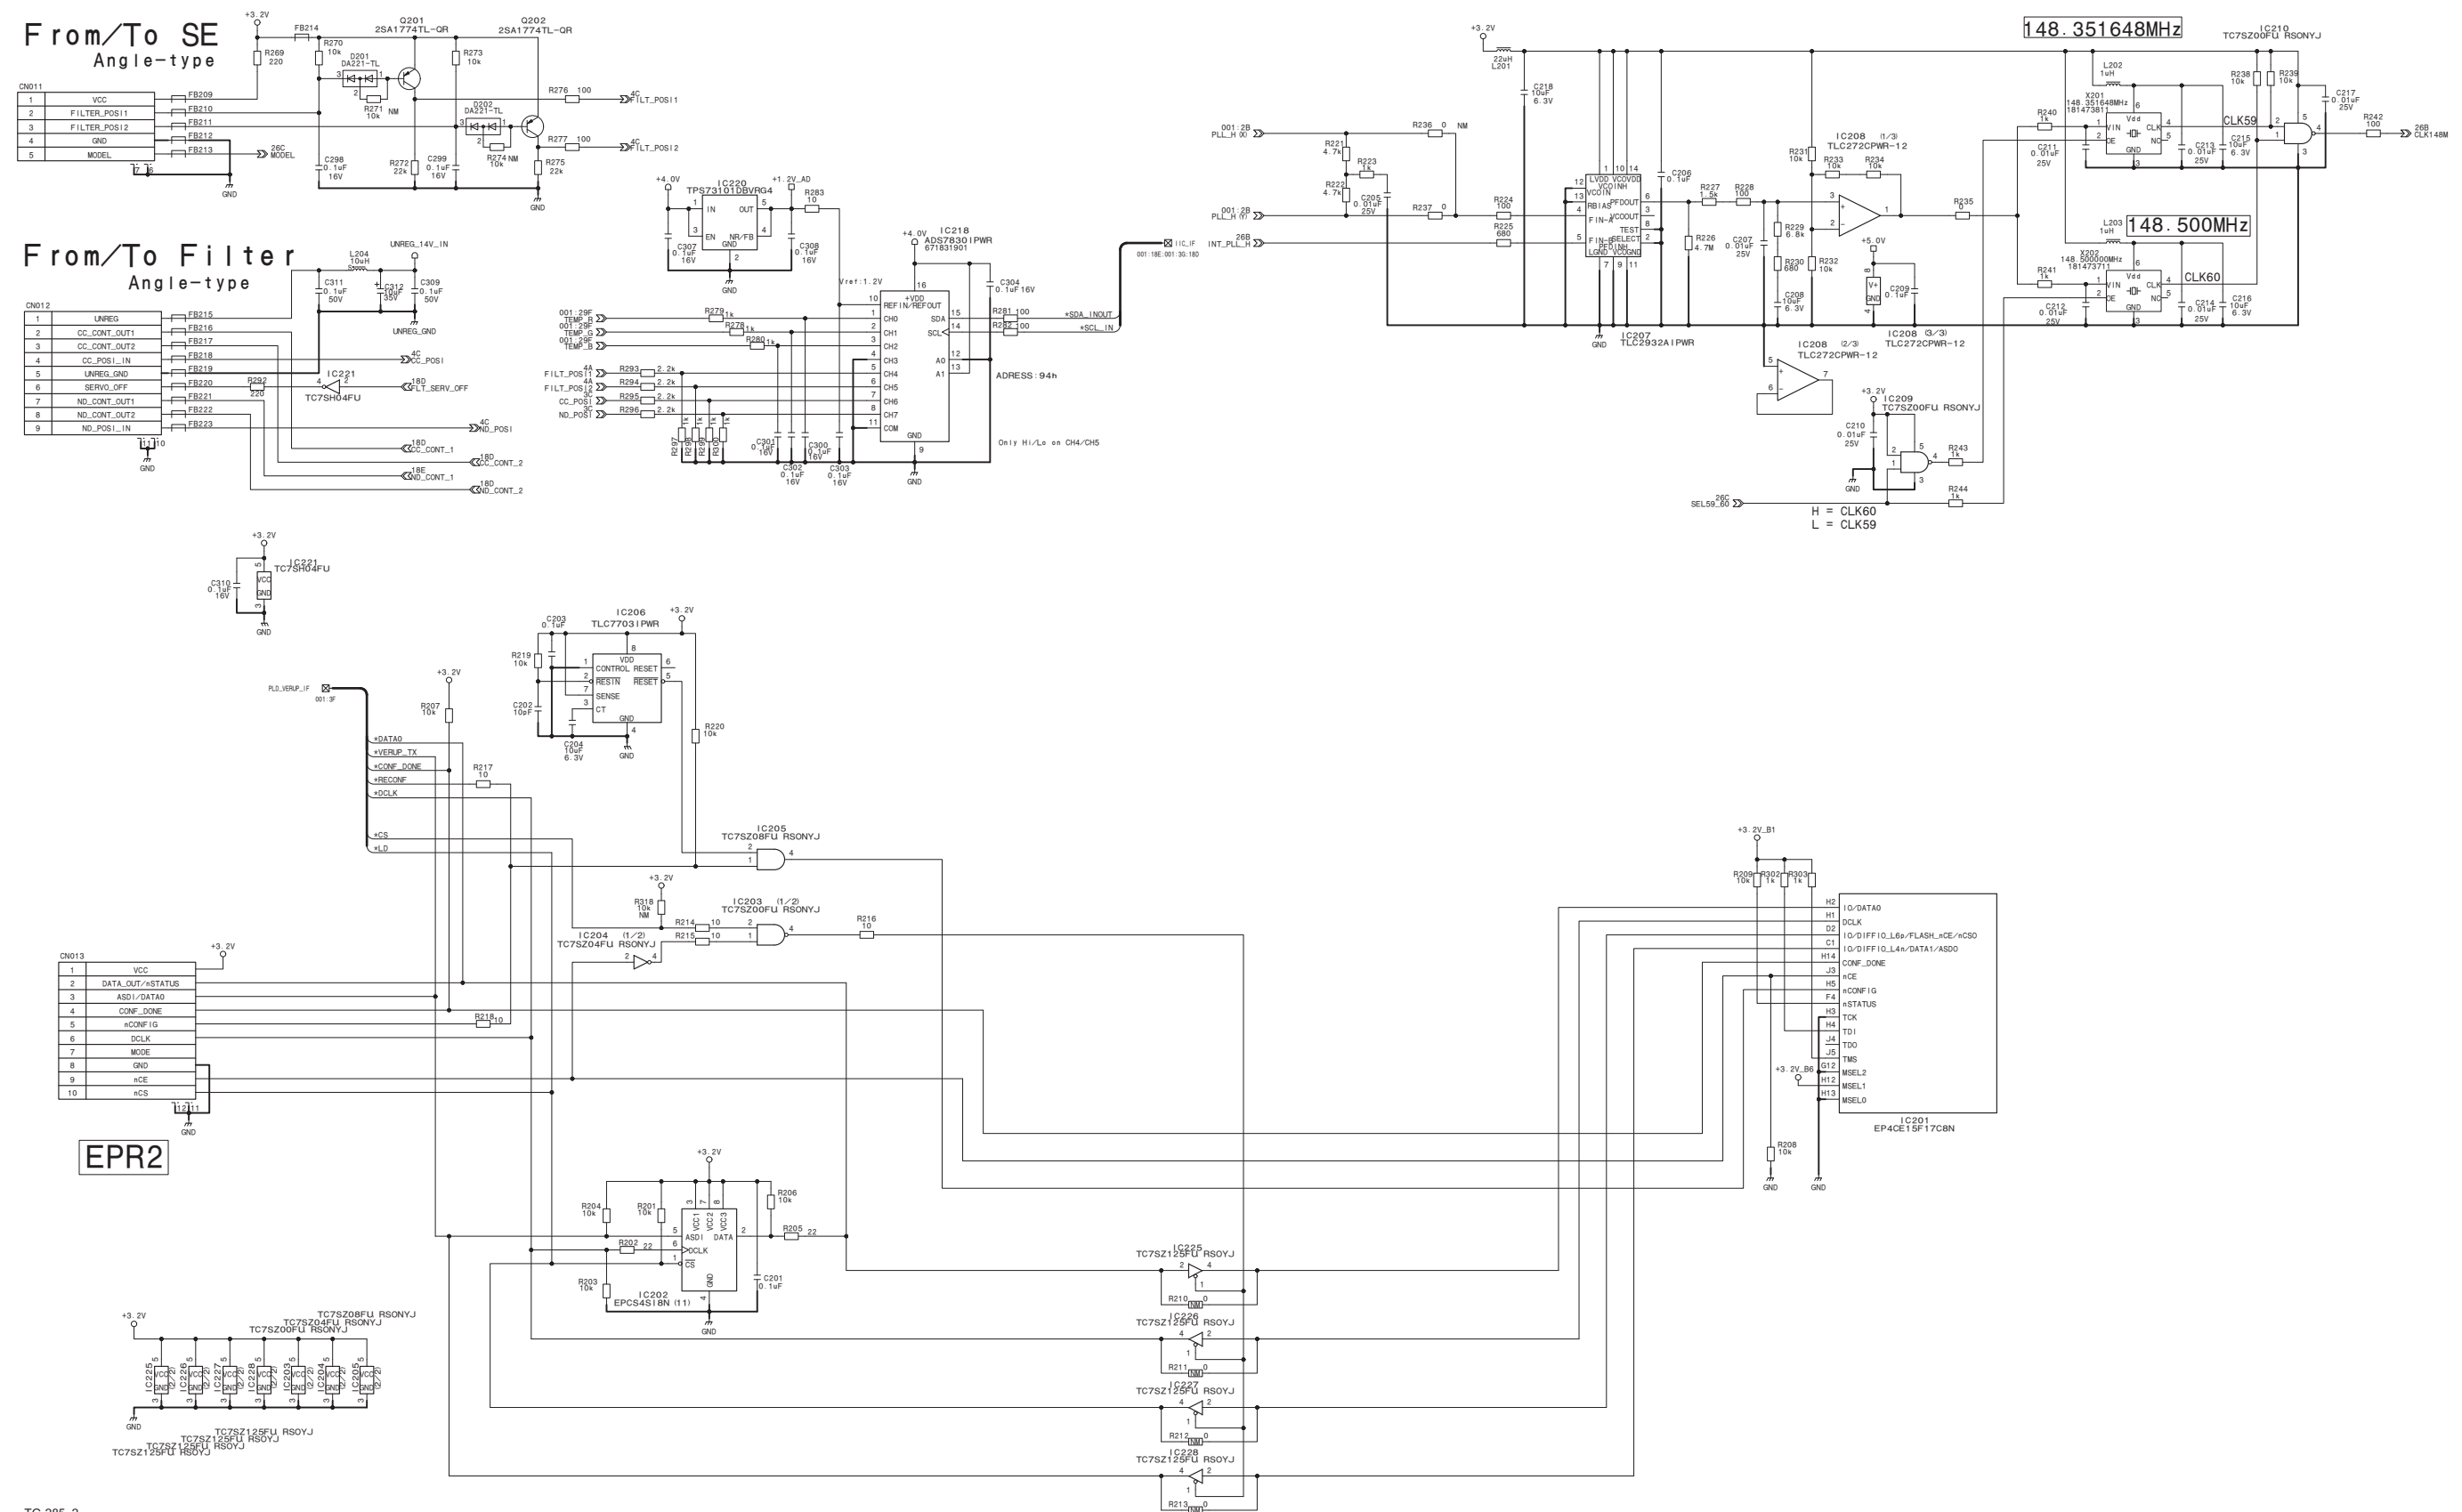


TG-285 (2/2)_R

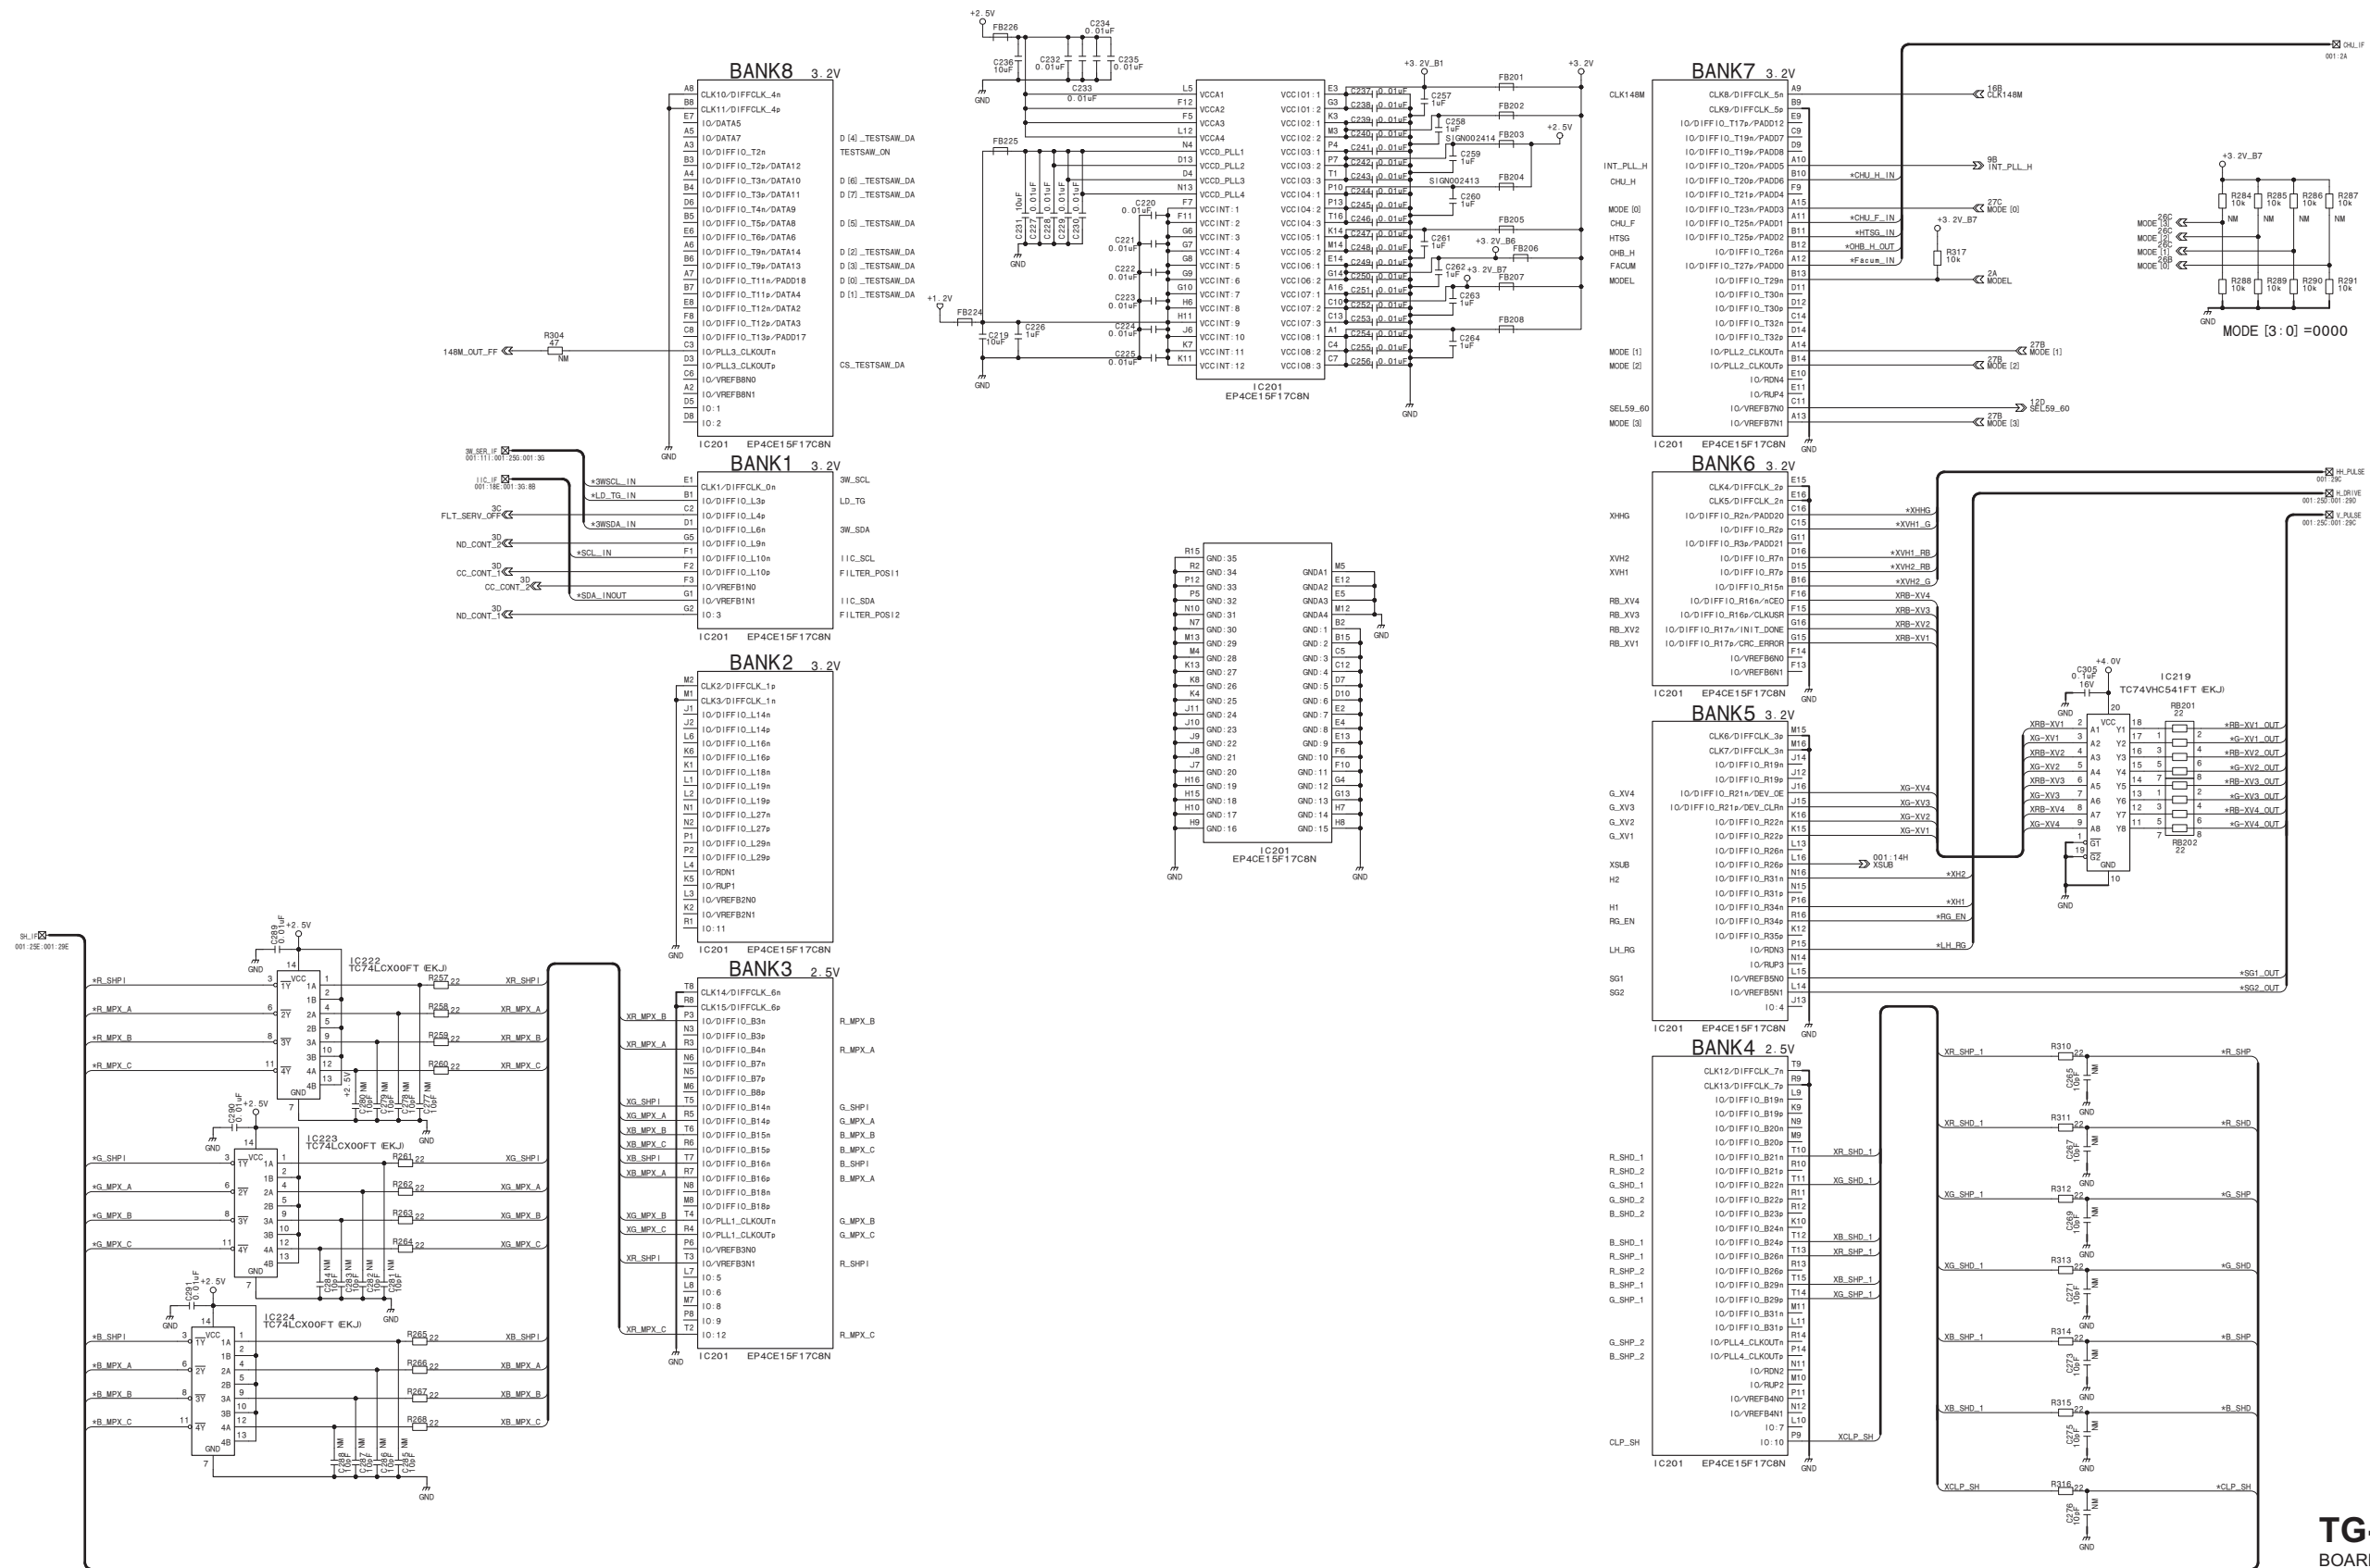


TG-285 (2/2)
BOARD NO. 1-889-420-11
TG-285_2

TX-148
TX-148 (1/4)_L

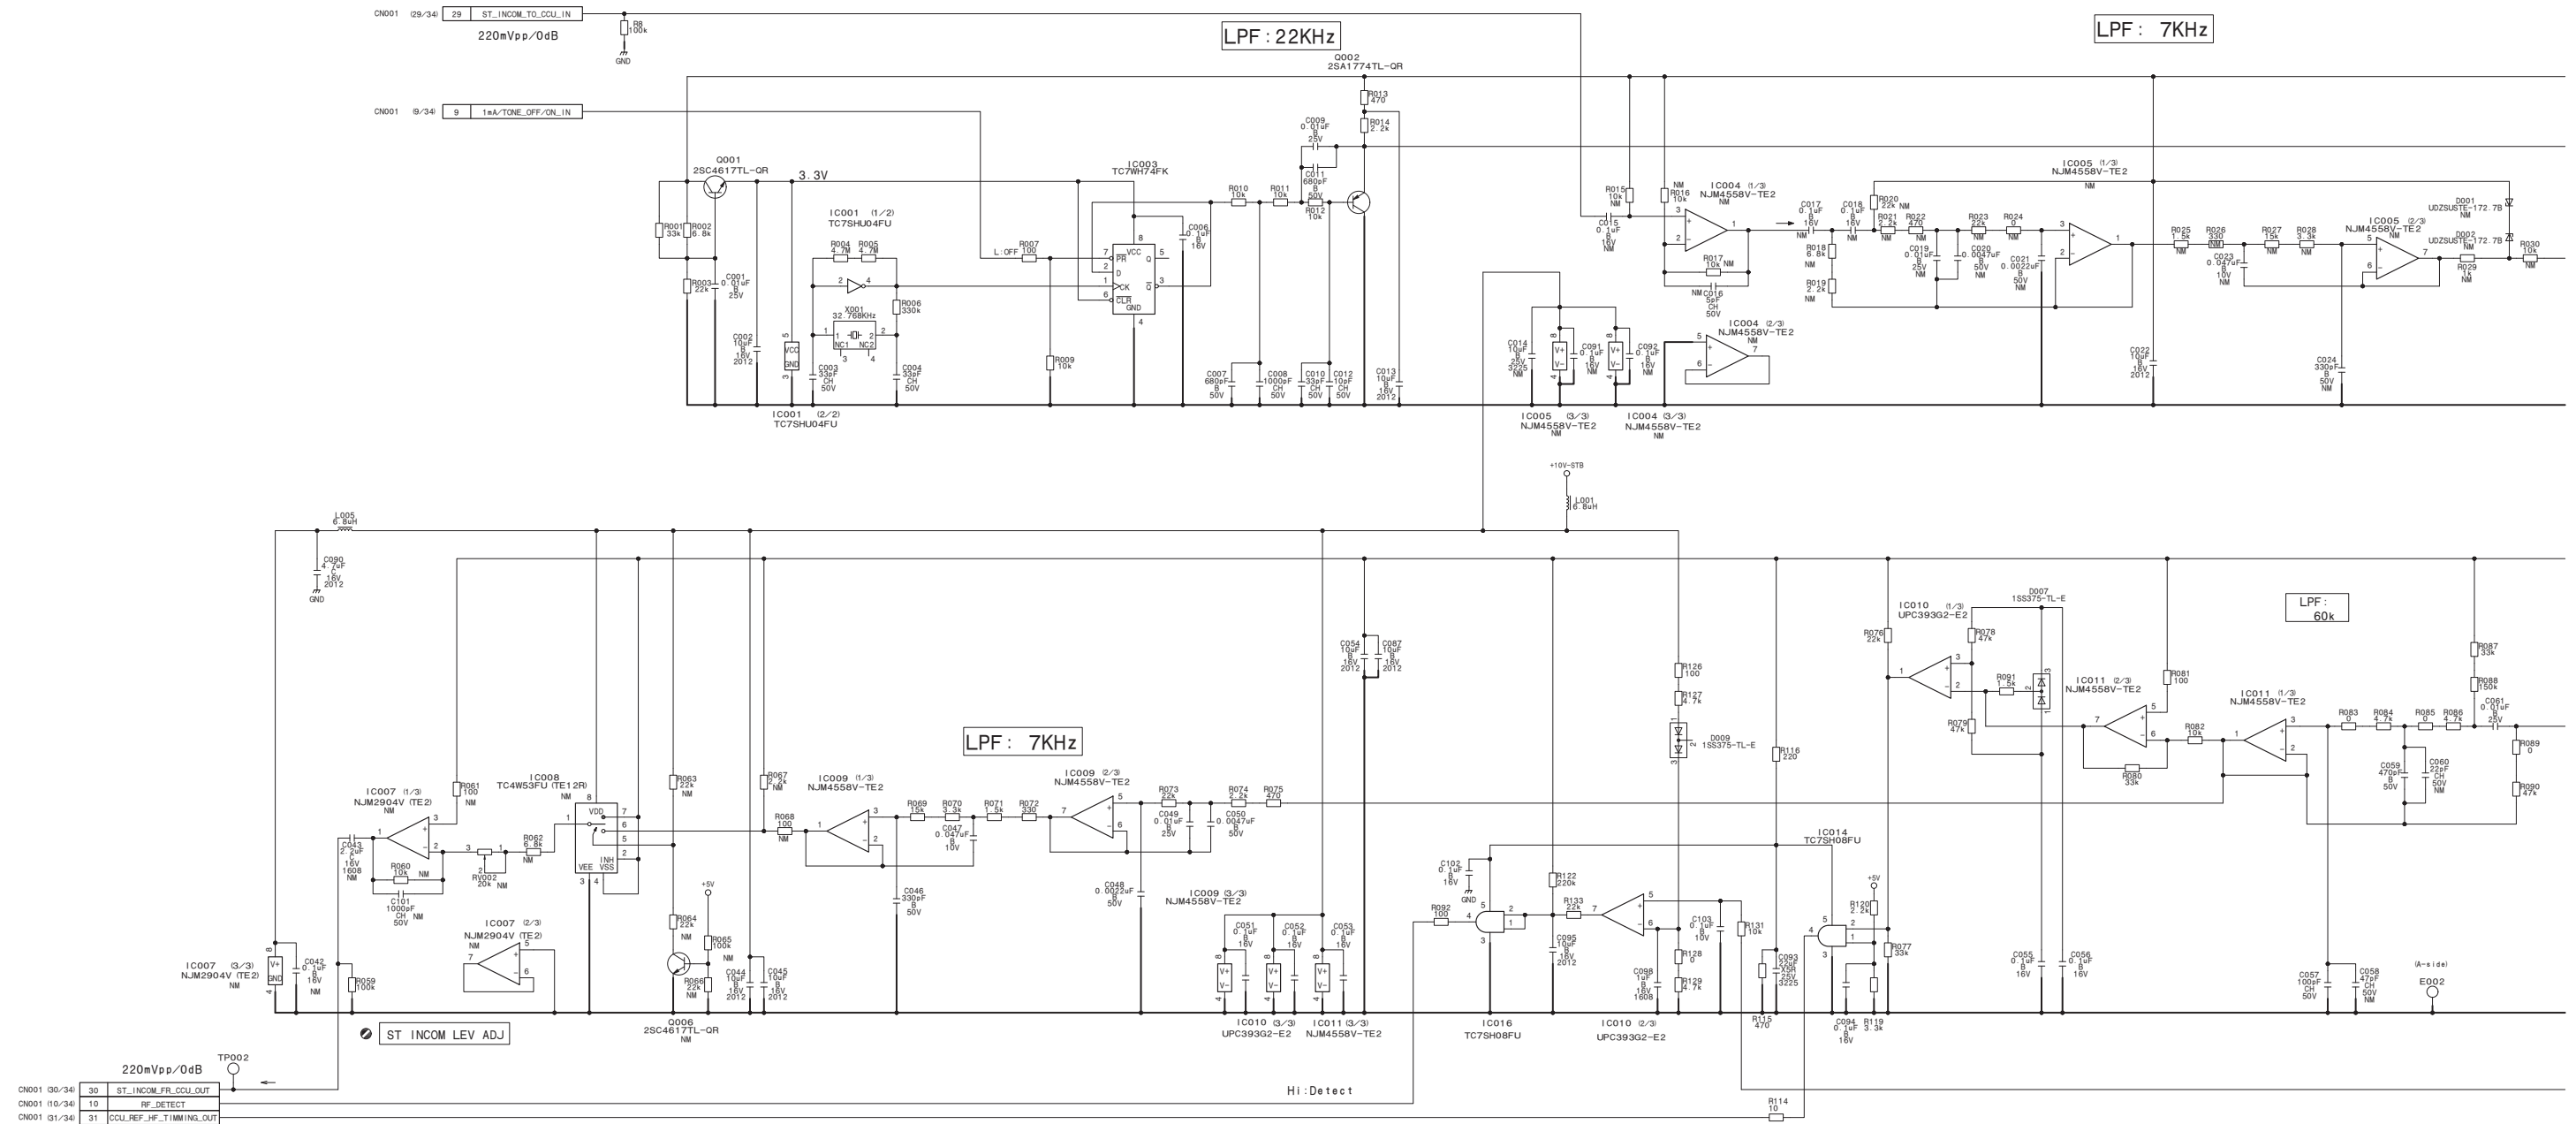


TX-148_1

TX-148 (1/4)_R

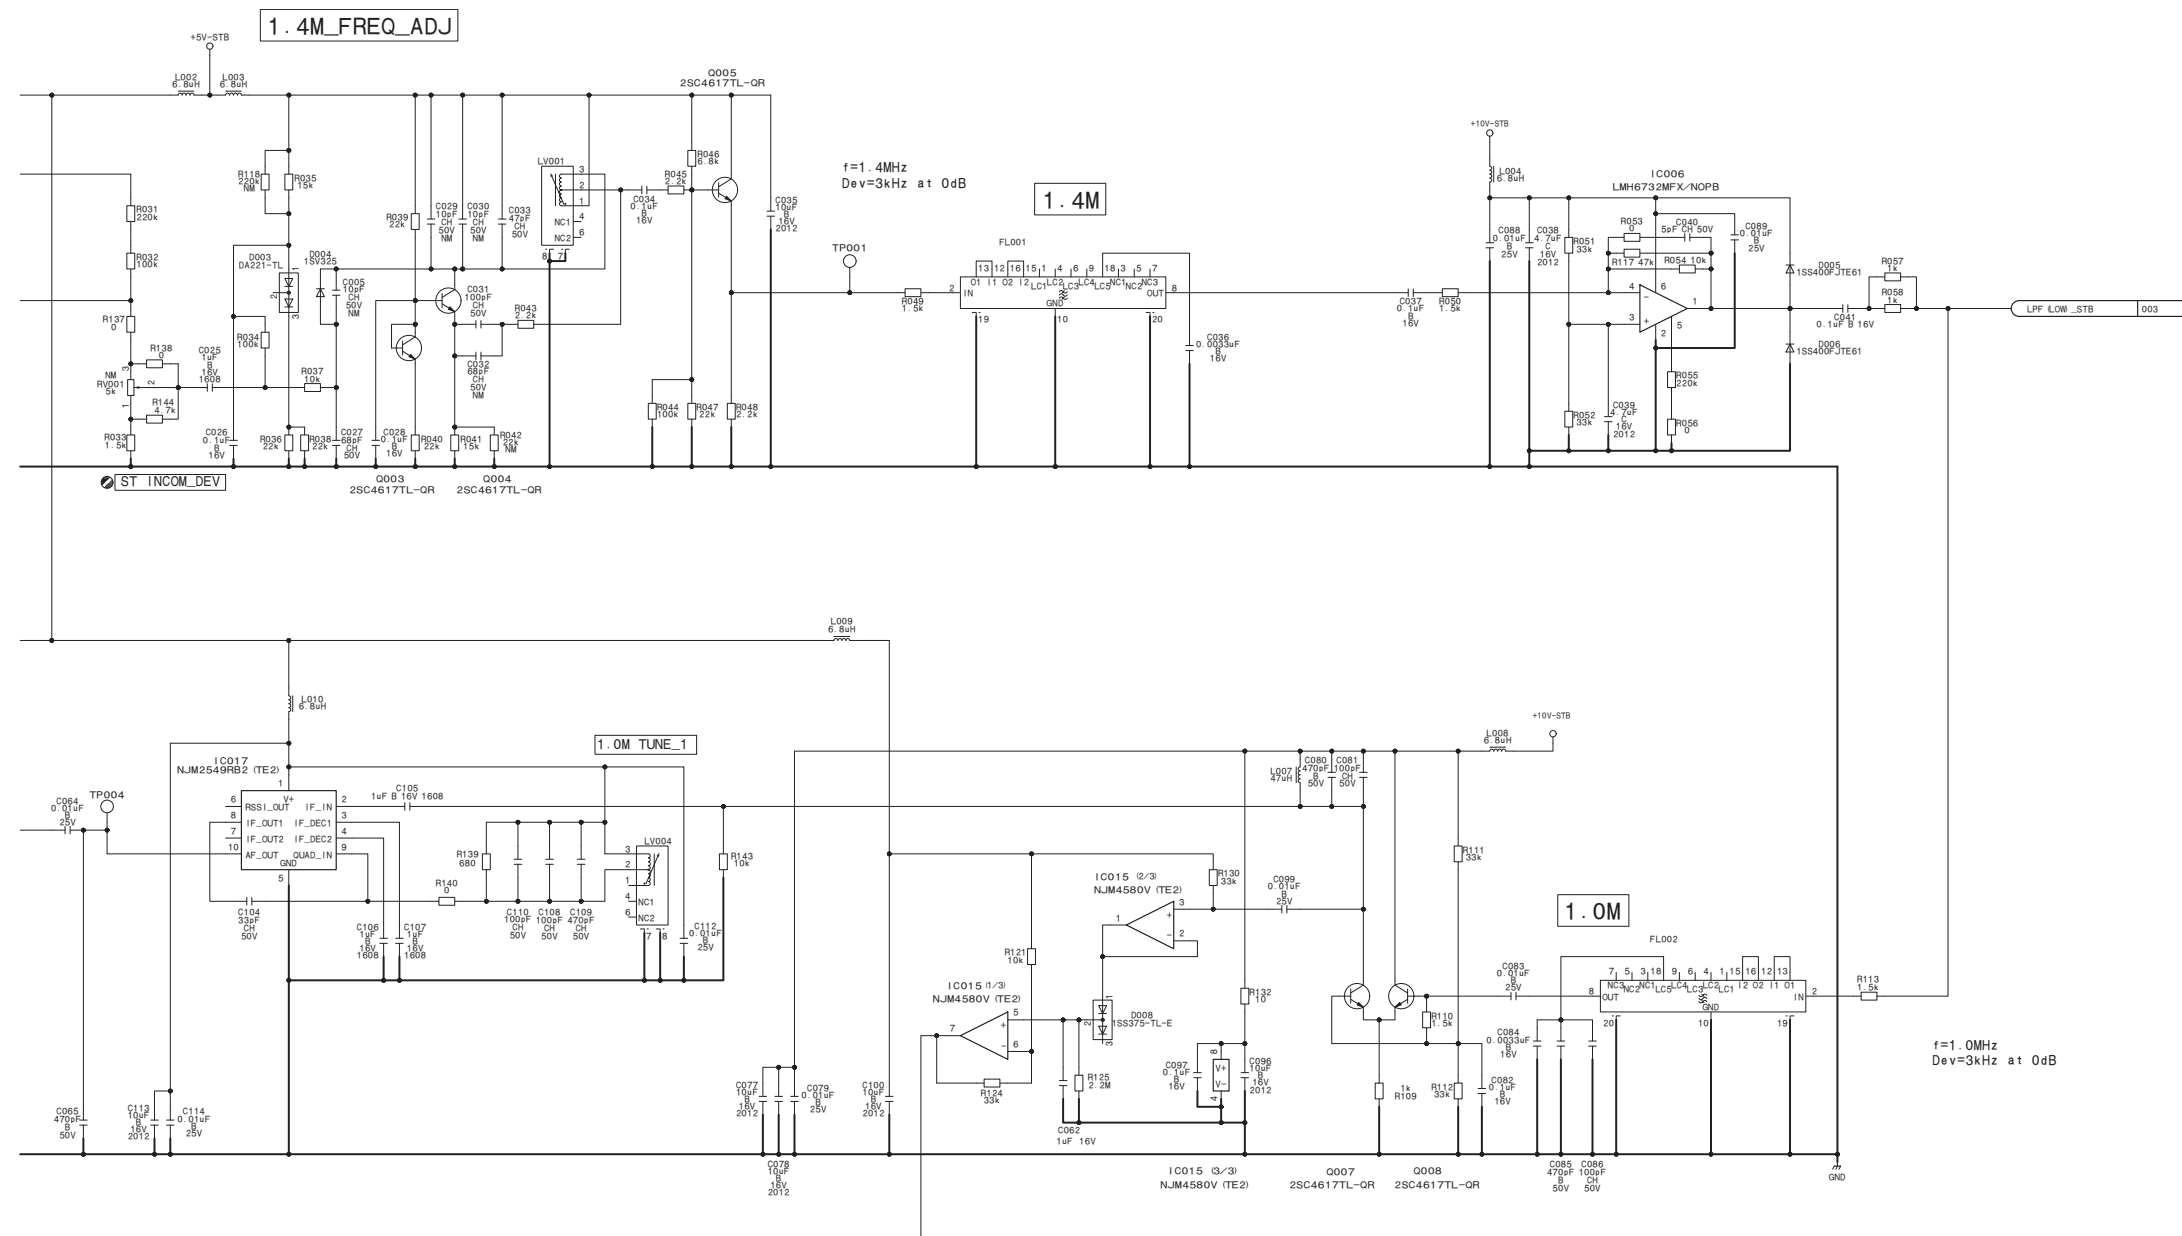


TX-148 (1/4)
BOARD NO. 1-889-426-12
TX-148_1

TX-148 (2/4)




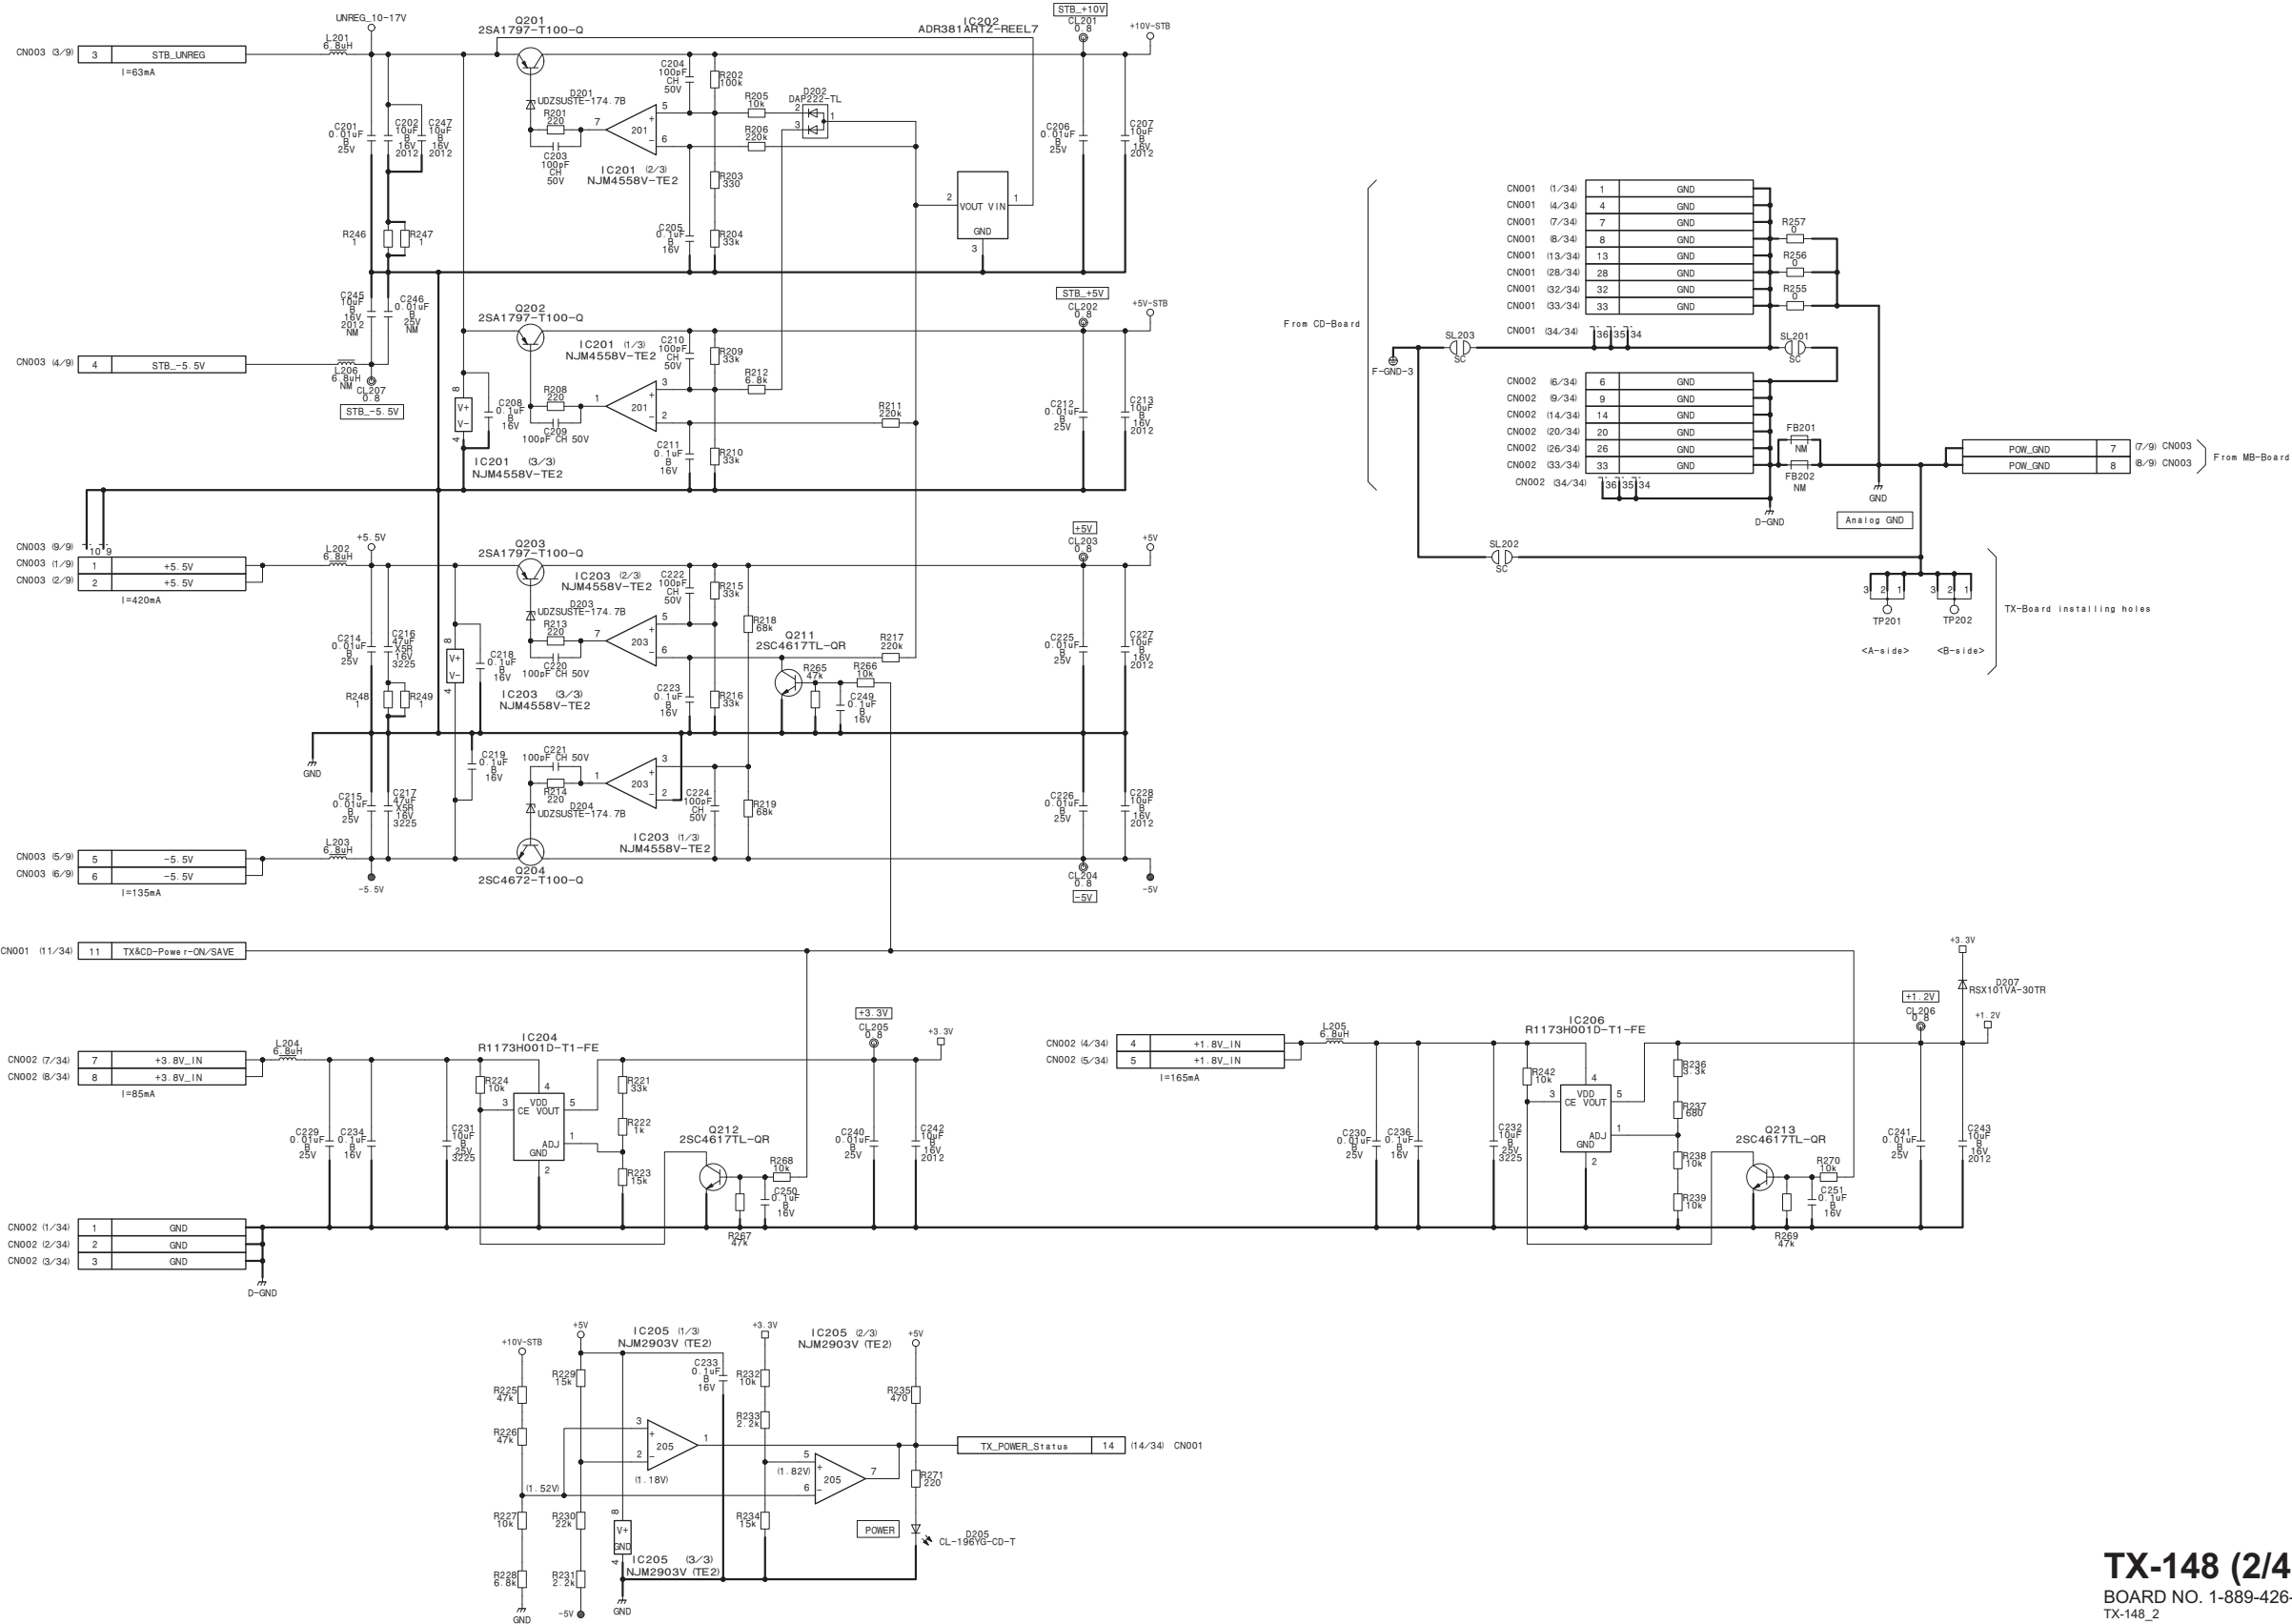


TX-148 (2/4)
BOARD NO. 1-889-426-12
TX-148_2


TX-148 (3/4)_L

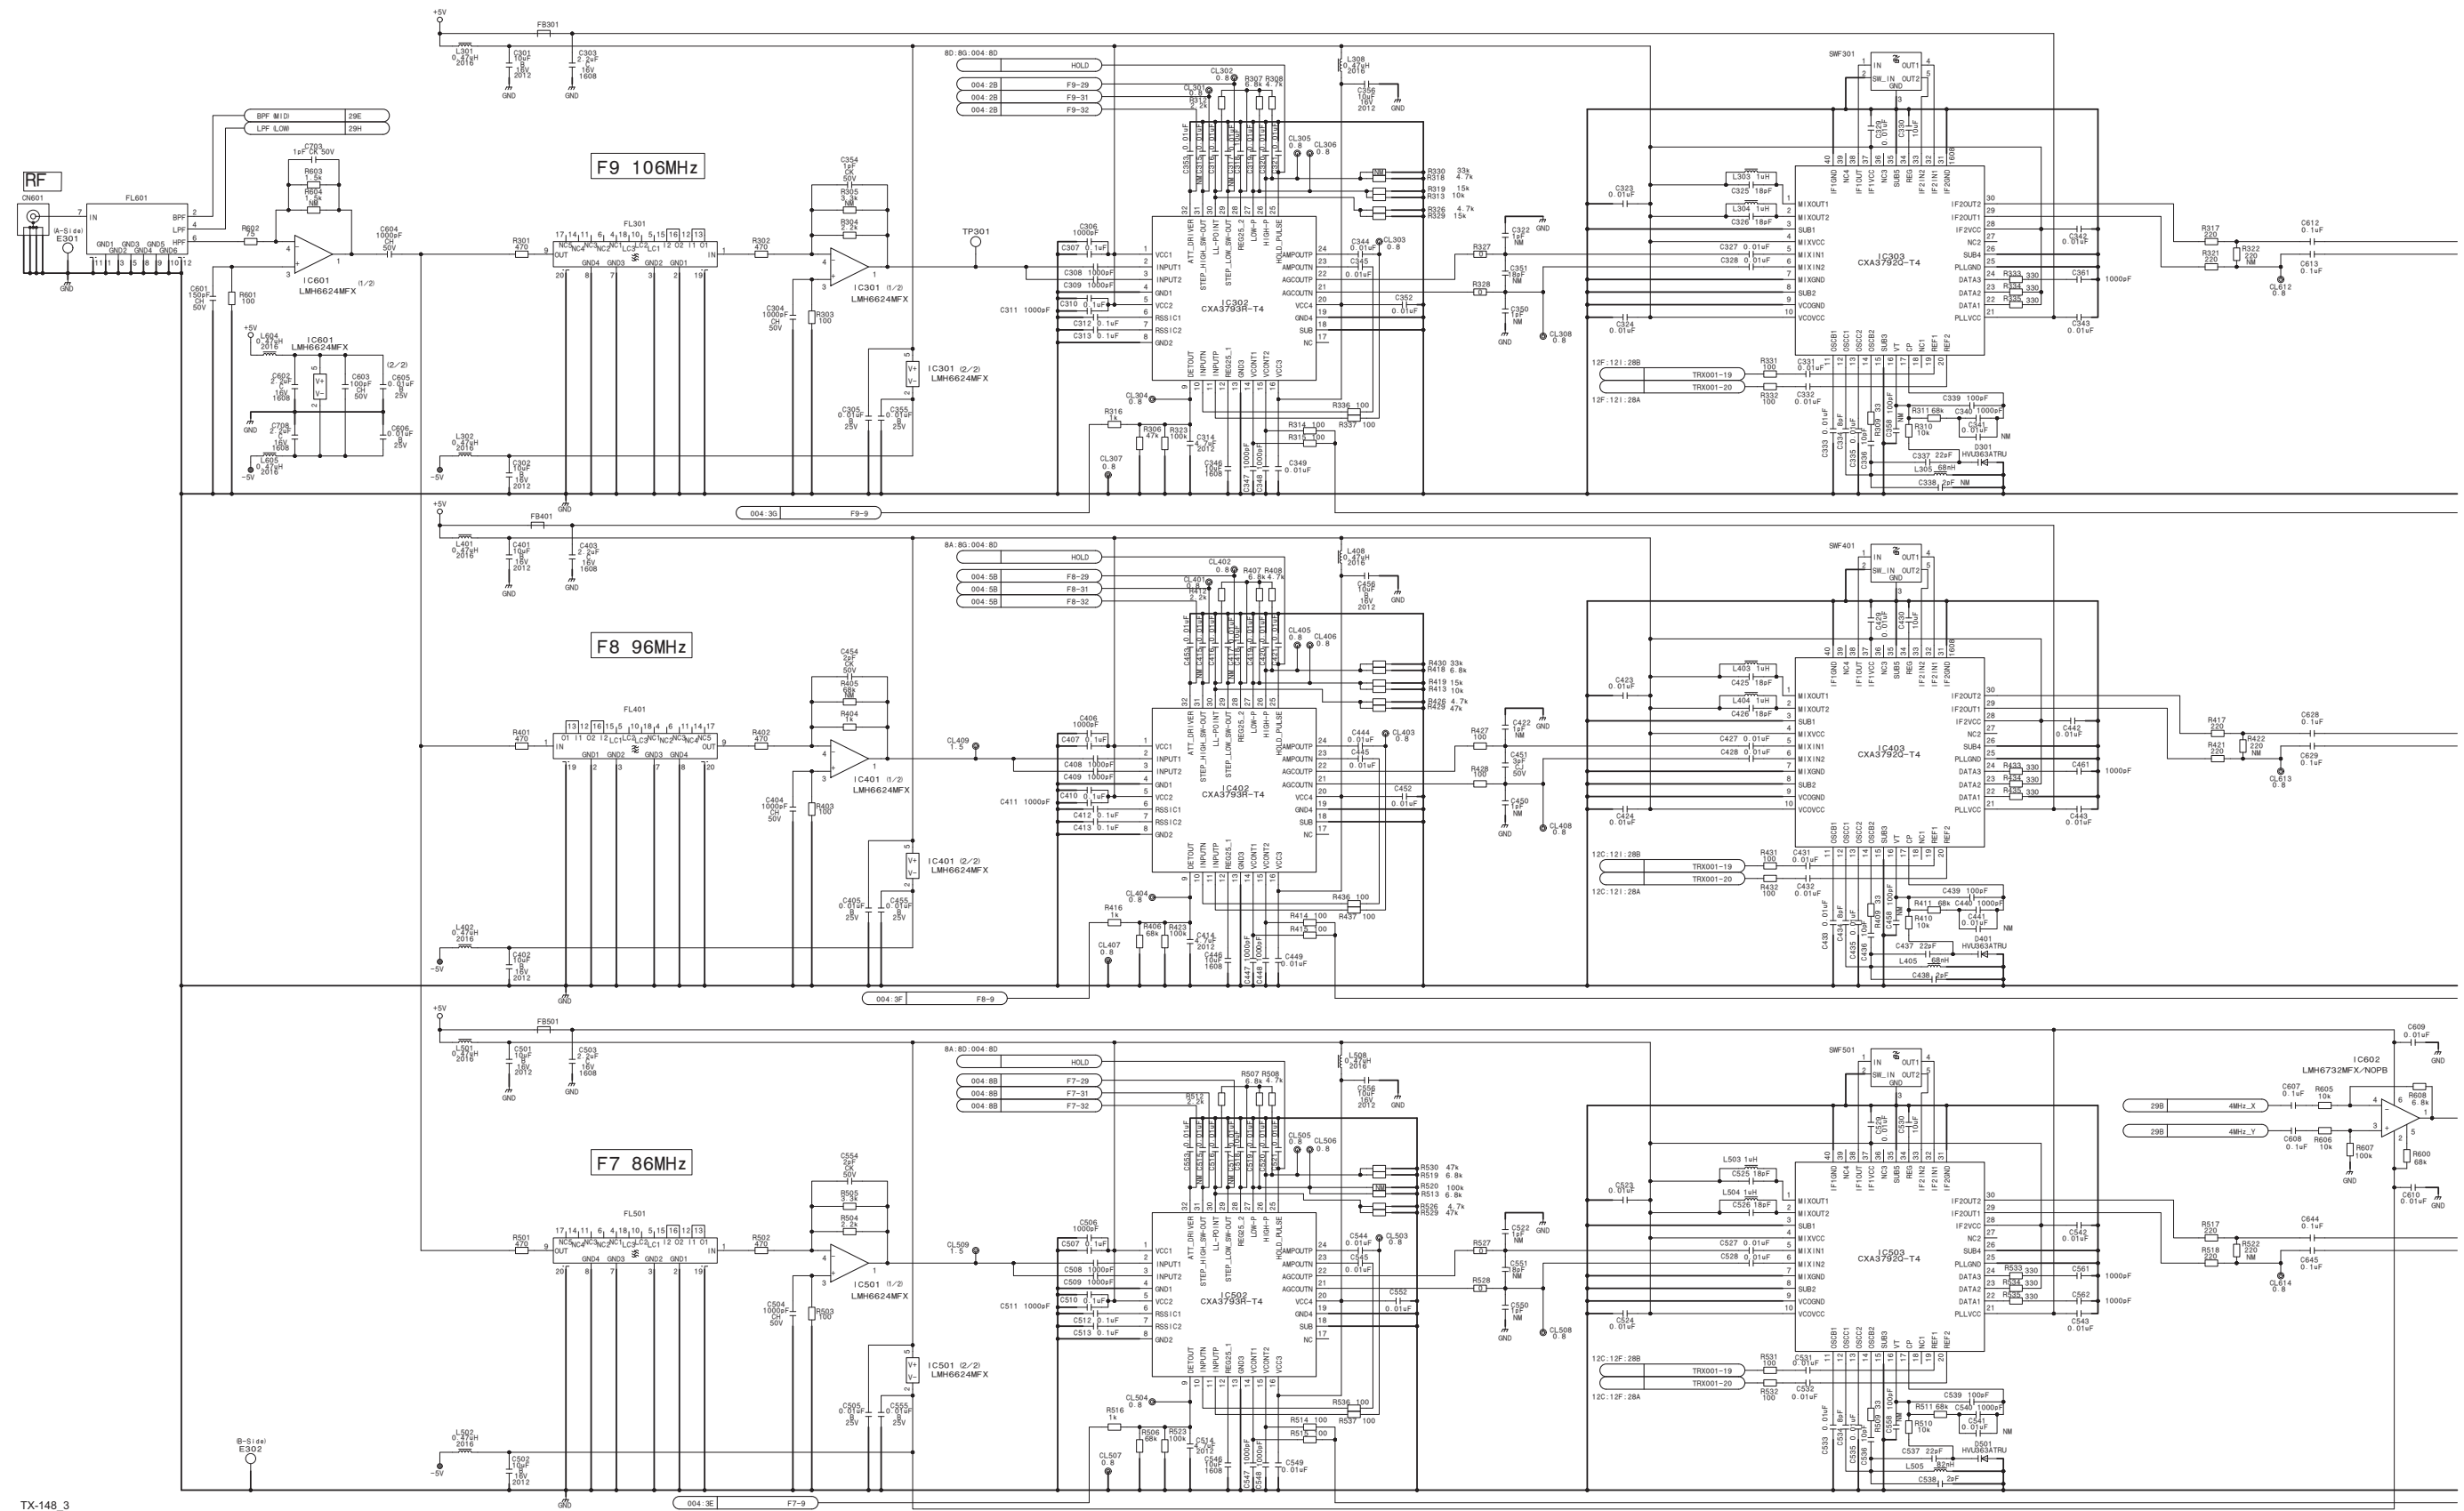

TX-148 (3/4)_R

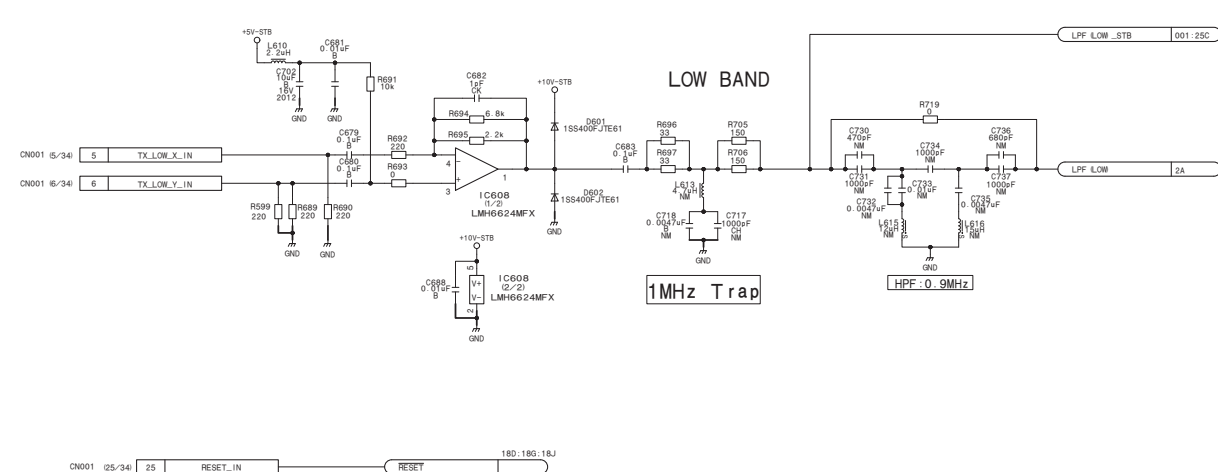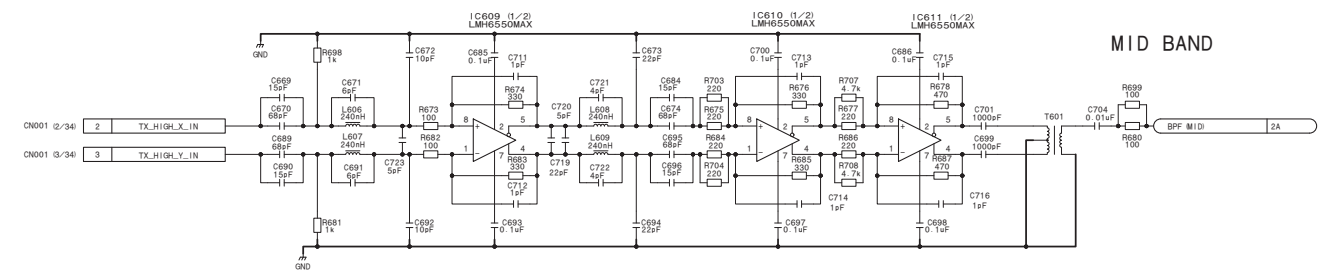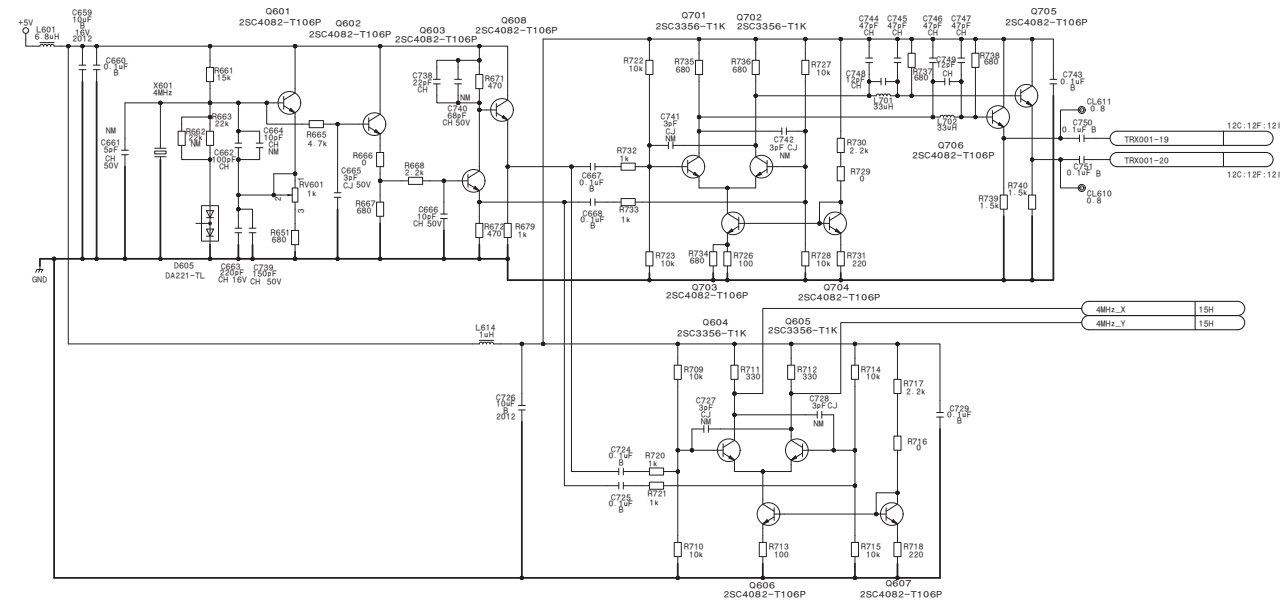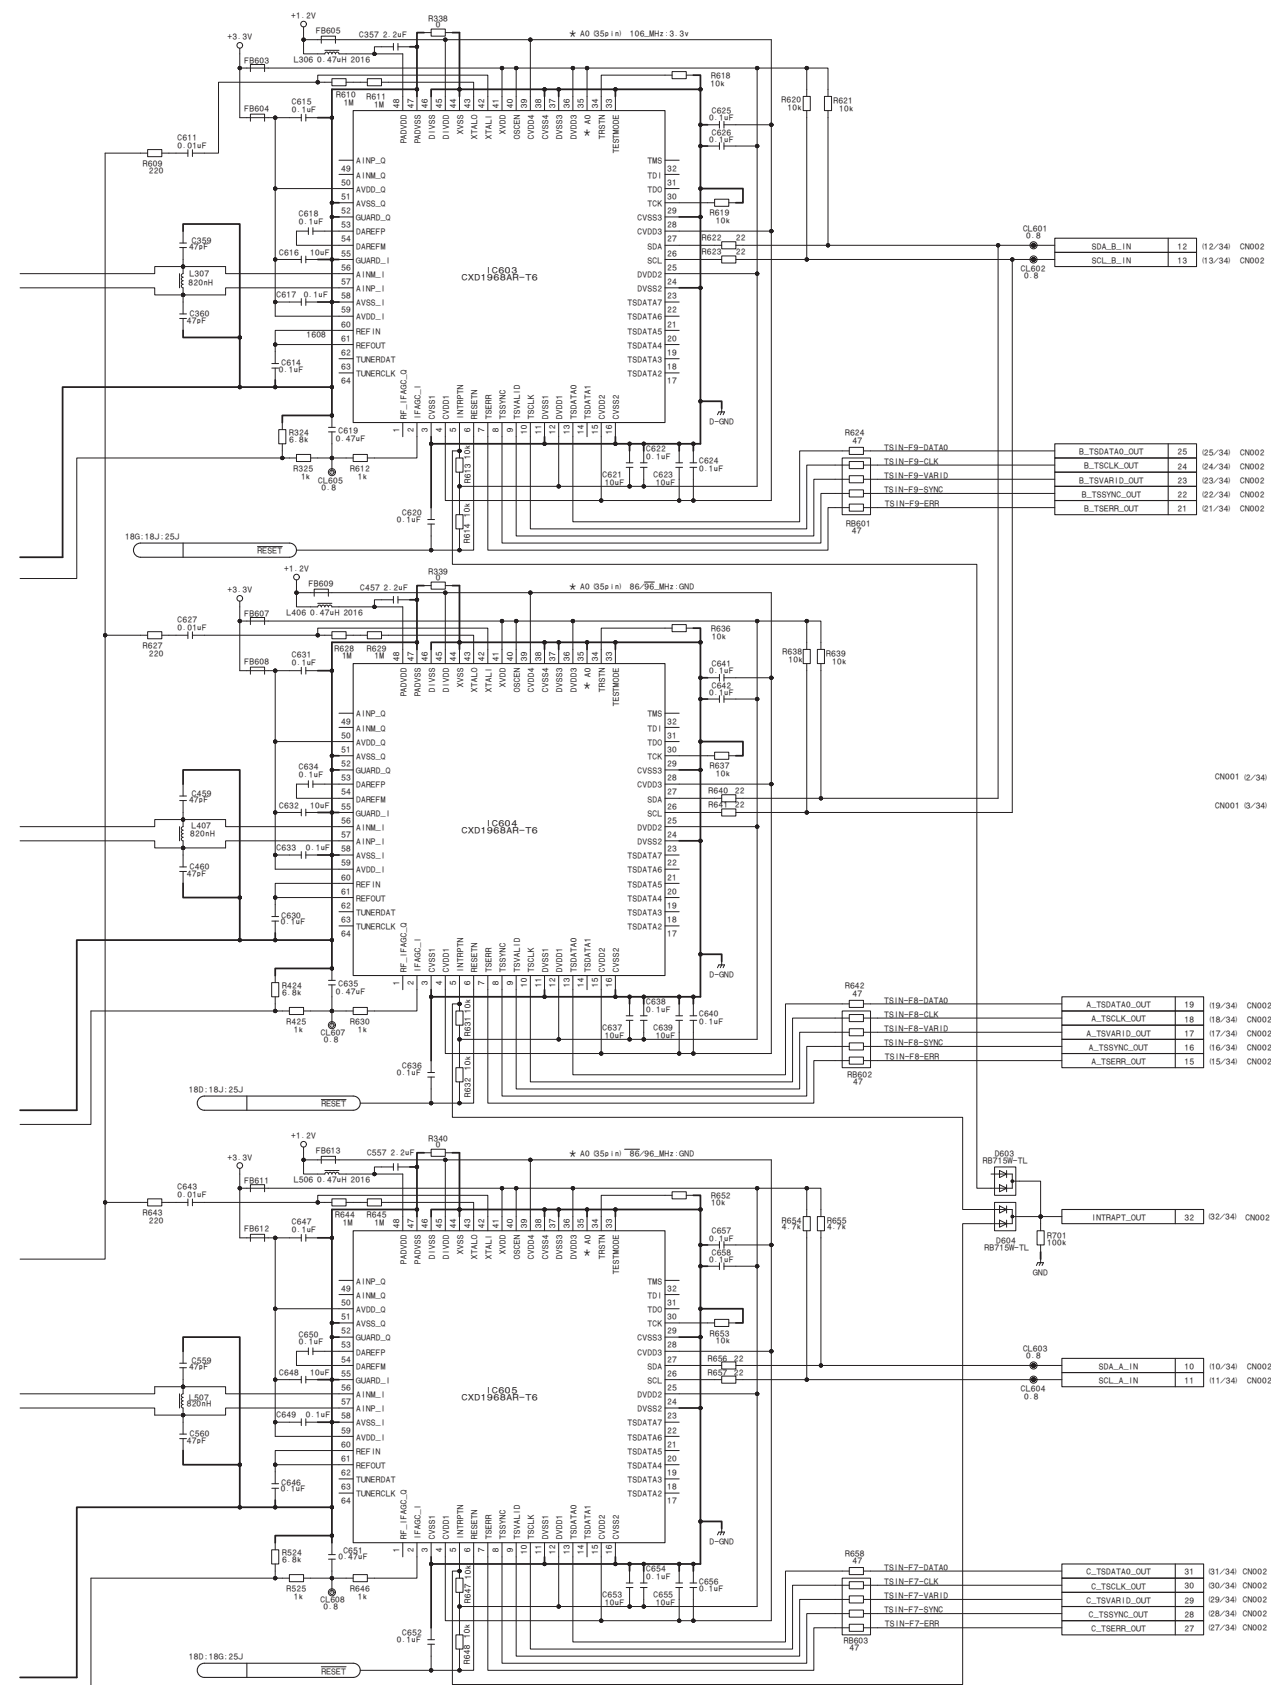


TX-148 (3/4)
BOARD NO. 1-889-426-12
TX-148_3

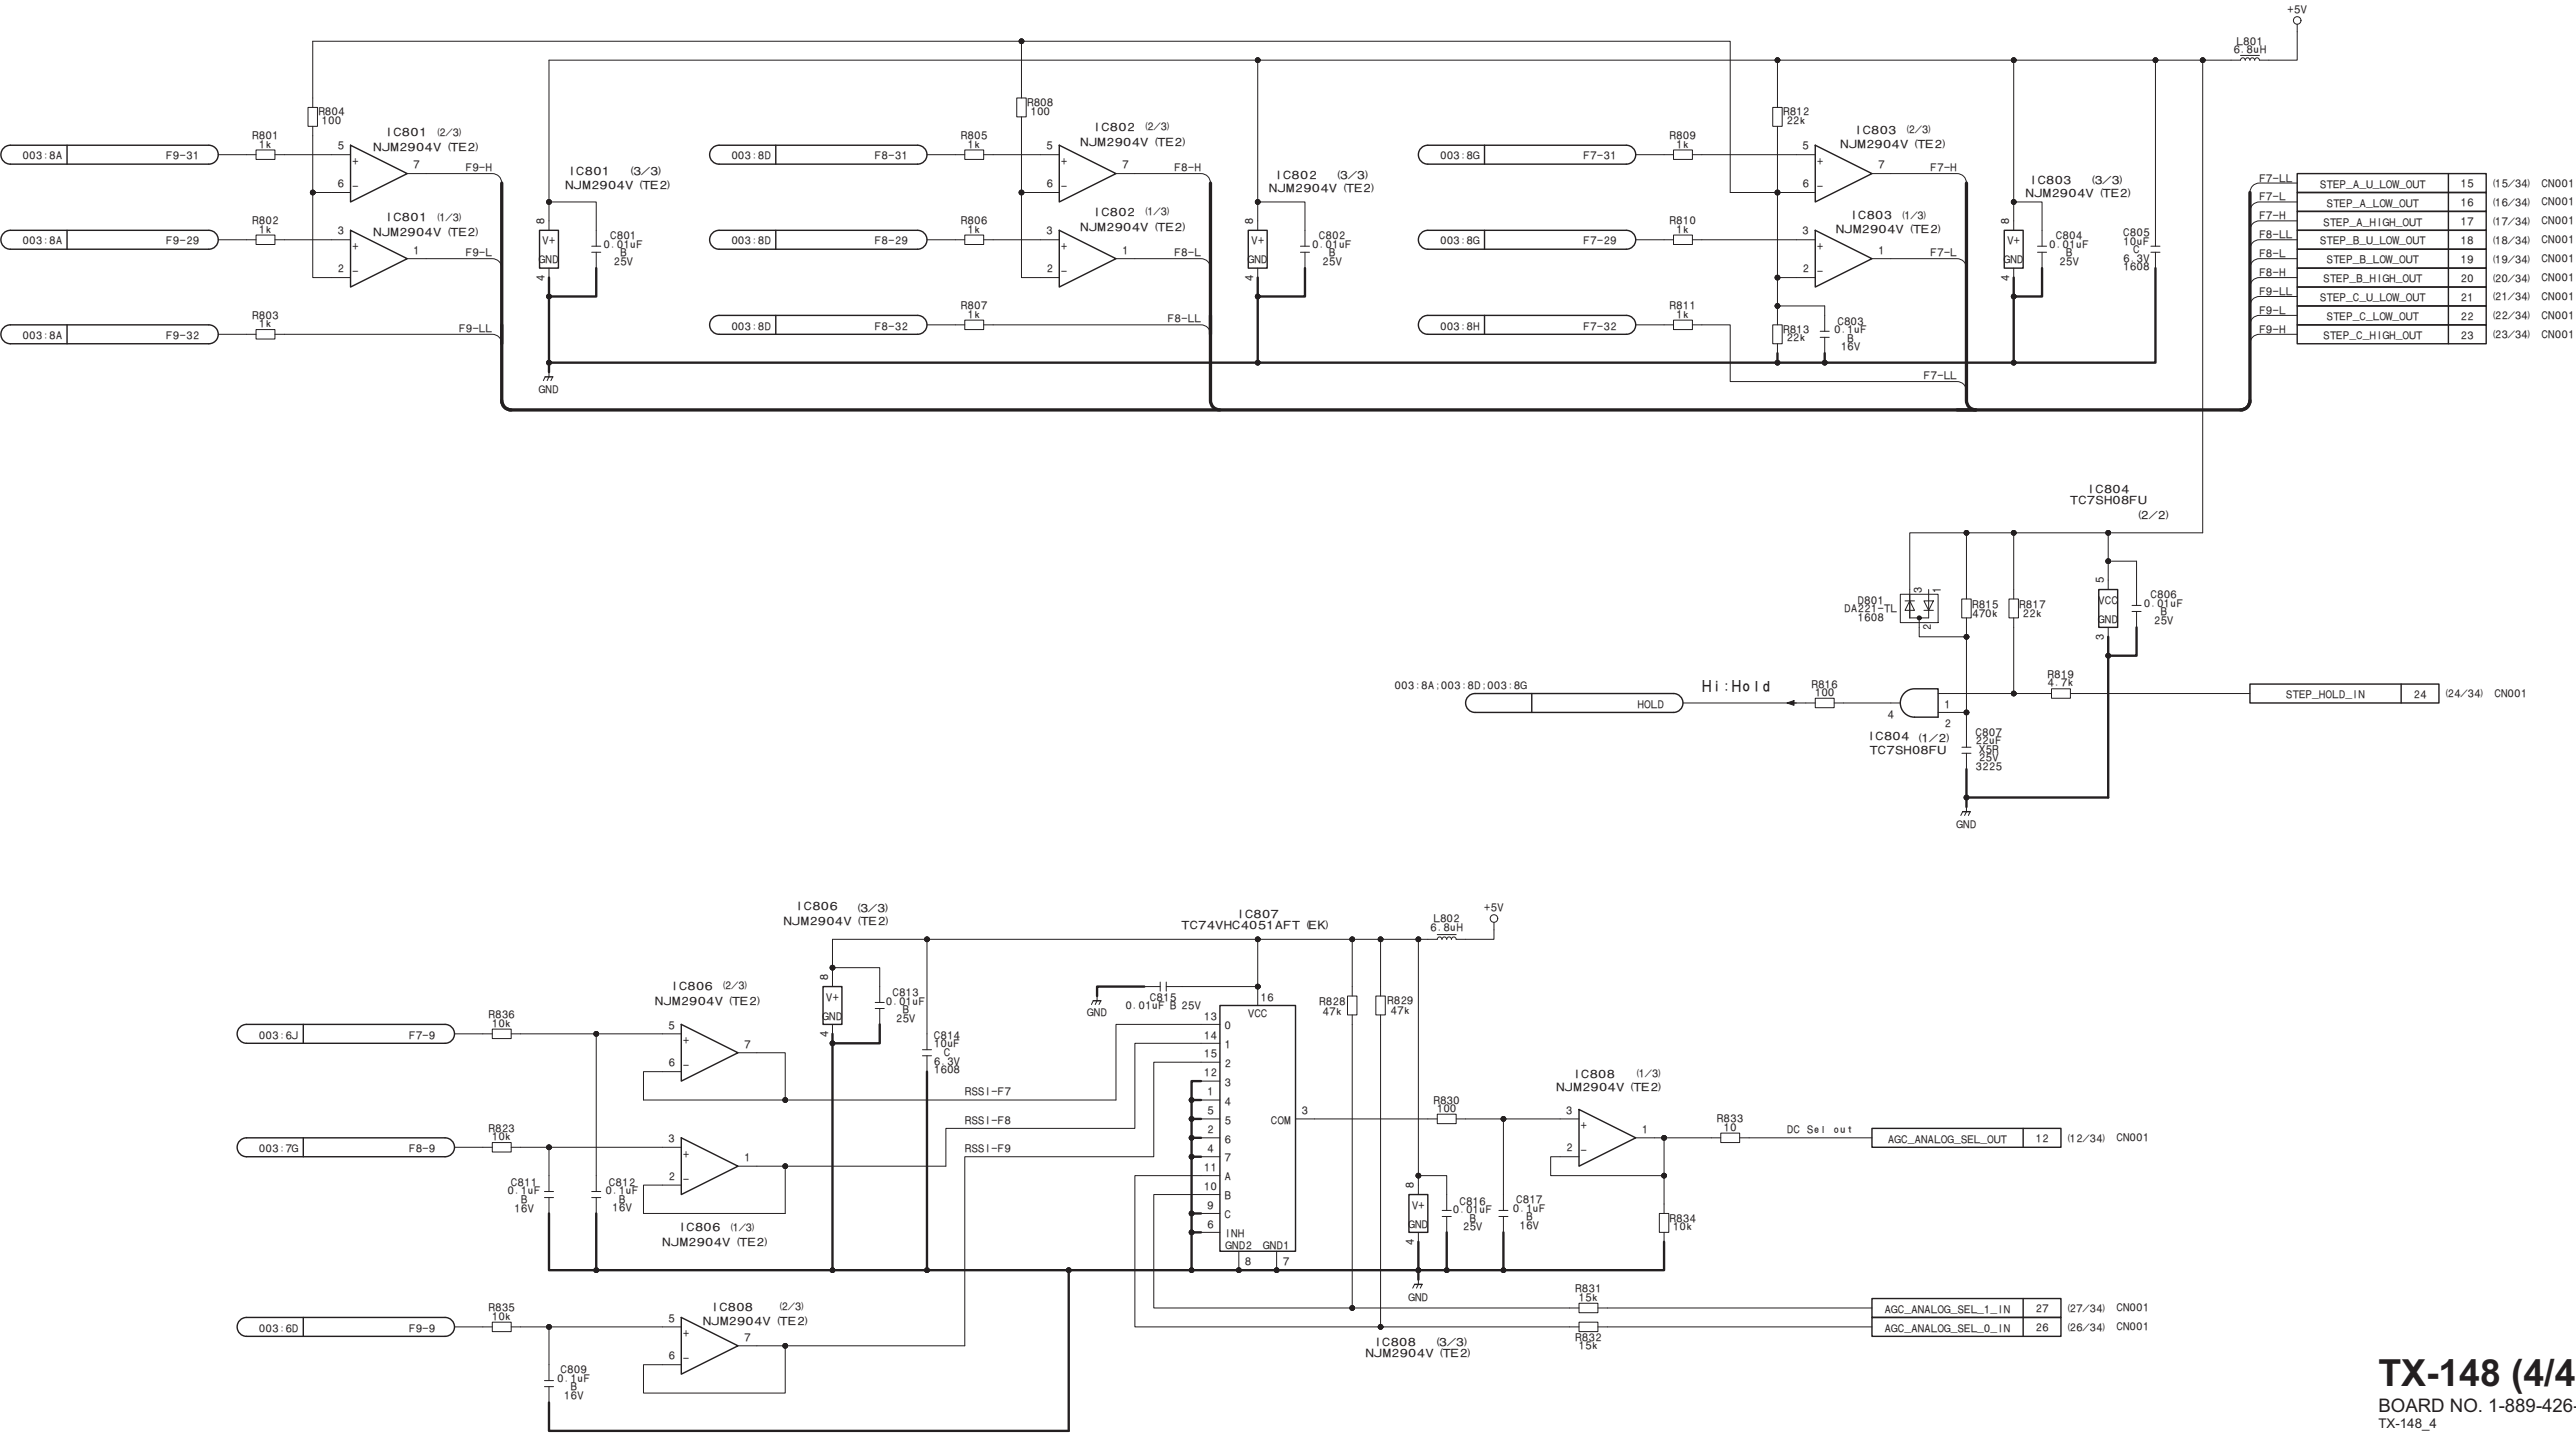


Section 3
Board Layouts

AT-189E

The location is described at the end in this section.




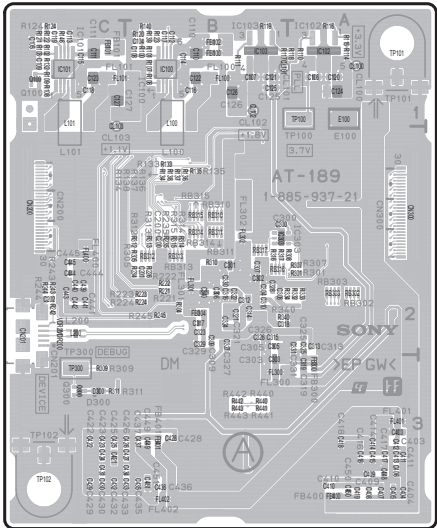


AT-189E -A SIDE-
SUFFIX: -21

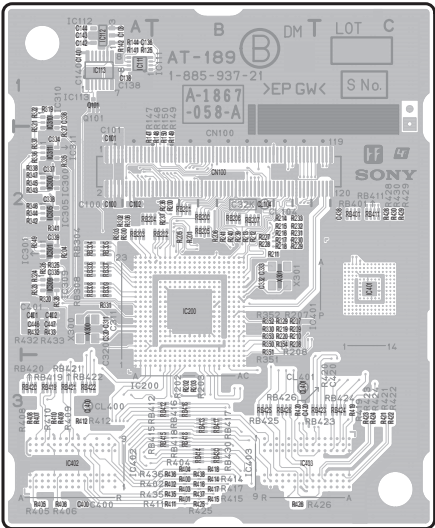


AT-189E -B SIDE-
SUFFIX: -21

The location is described at the end in this section.




CN-3639

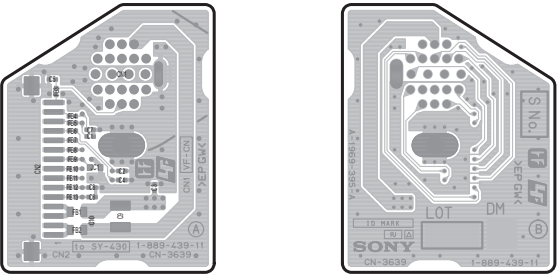

CN-3639 -A SIDE-
SUFFIX: -11

CN-3639 -B SIDE-
SUFFIX: -11


CN-3642

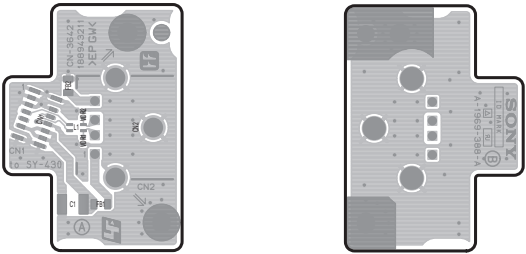

CN-3642 -A SIDE-
SUFFIX: -11

CN-3642 -B SIDE-
SUFFIX: -11


CN-3640

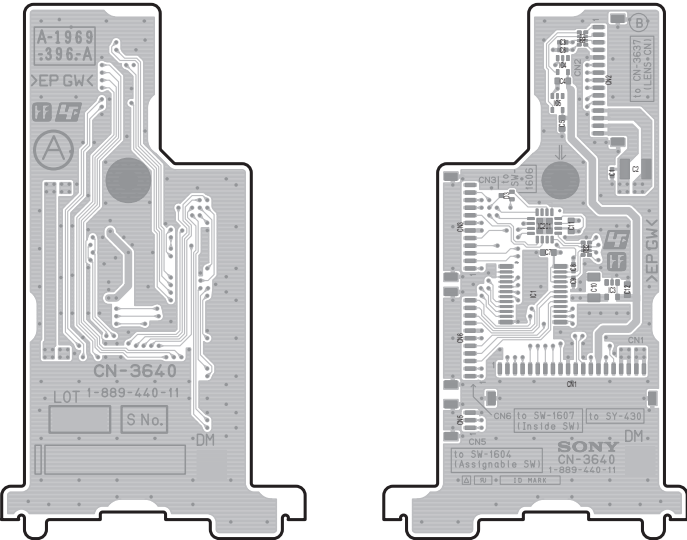

CN-3640 -A SIDE-
SUFFIX: -11

CN-3640 -B SIDE-
SUFFIX: -11

CN-3643

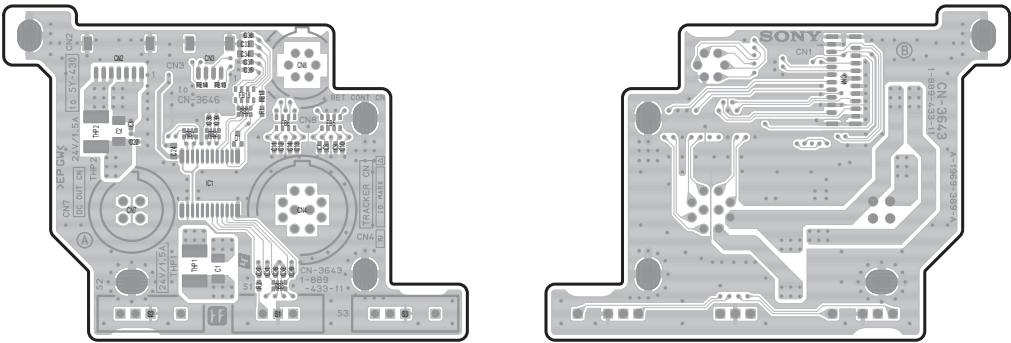

CN-3643 -A SIDE-
SUFFIX: -11

CN-3643 -B SIDE-
SUFFIX: -11


CN-3644



CN-3644 -A SIDE-
SUFFIX: -11

CN-3644 -B SIDE-
SUFFIX: -11


CN-3641

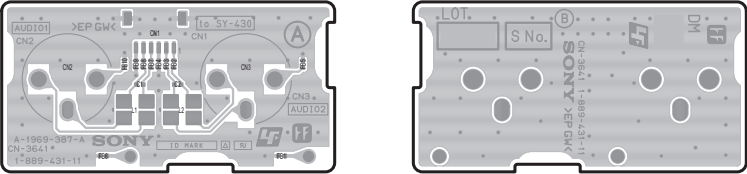


CN-3641 -A SIDE-
SUFFIX: -11

CN-3641 -B SIDE-
SUFFIX: -11

CN-3645




CN-3645 -A SIDE-
SUFFIX: -11




CN-3645 -B SIDE-
SUFFIX: -11

CN-3646




CN-3646 -A SIDE-
SUFFIX: -11




CN-3646 -B SIDE-
SUFFIX: -11

CN-3647




CN-3647 -A SIDE-
SUFFIX: -11




CN-3647 -B SIDE-
SUFFIX: -11

CN-3648




CN-3648 -A SIDE-
SUFFIX: -11




CN-3648 -A SIDE-
SUFFIX: -11

CN-3653

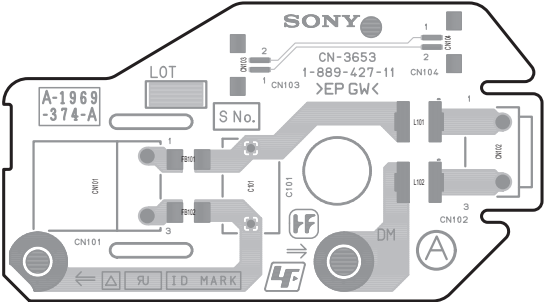


CN-3653 -A SIDE-
SUFFIX: -11

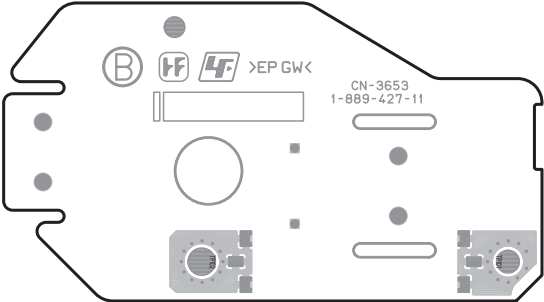


CN-3653 -B SIDE-
SUFFIX: -11

DPR-358

The location is described at the end in this section.

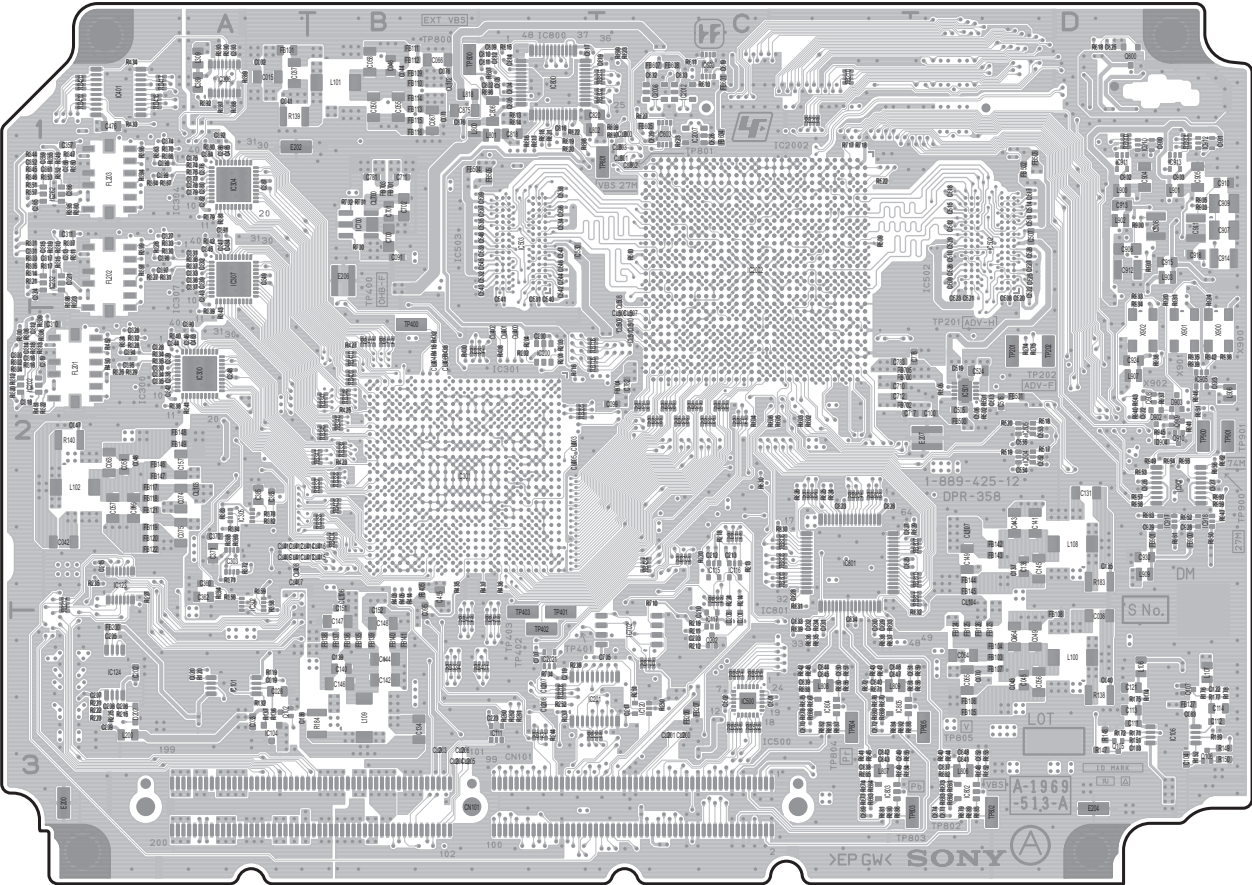


DPR-358 -A SIDE-
SUFFIX: -12

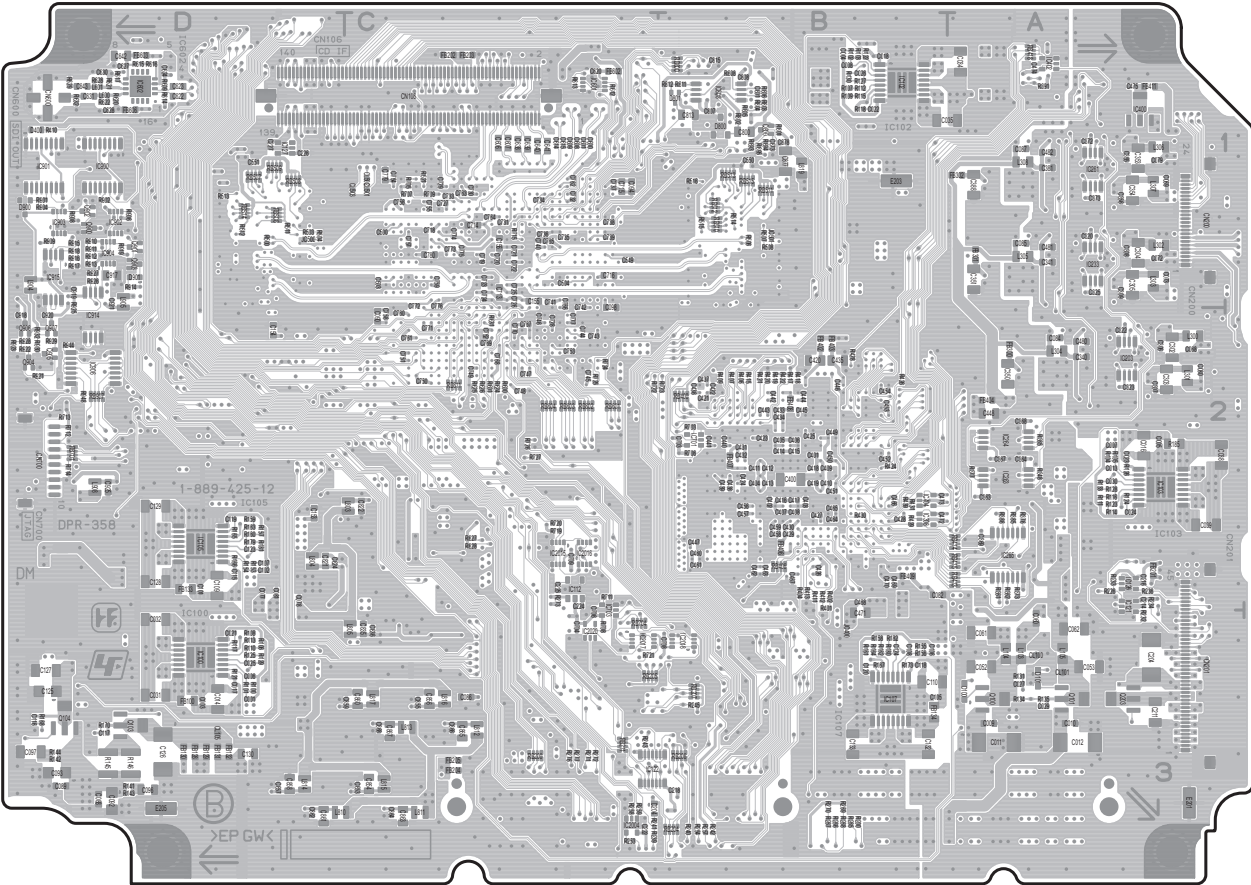


DPR-358 -B SIDE-
SUFFIX: -12

DR-675

The location is described at the end in this section.

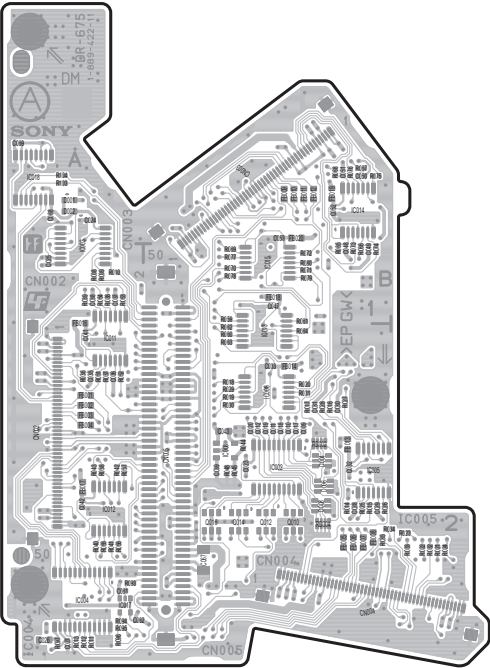


DR-675 -A SIDE-
SUFFIX: -11

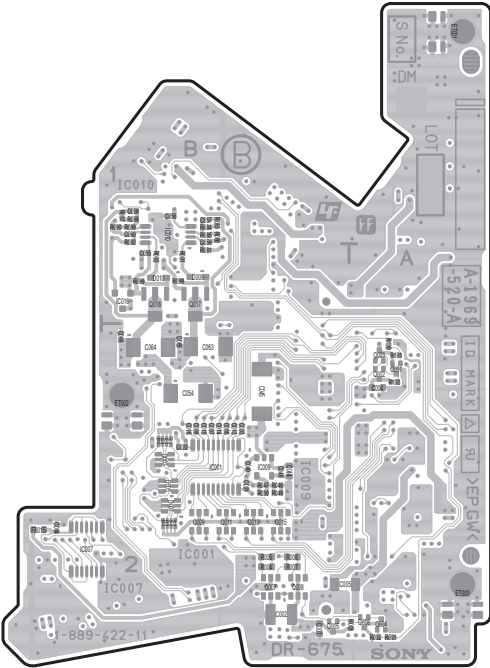


DR-675 -B SIDE-
SUFFIX: -11

FL-377

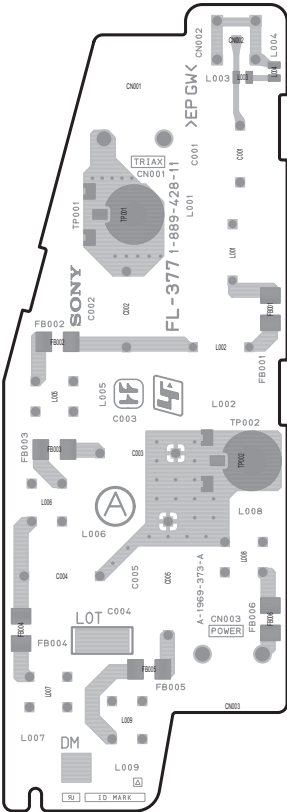


FL-377 -A SIDE-
SUFFIX: -11

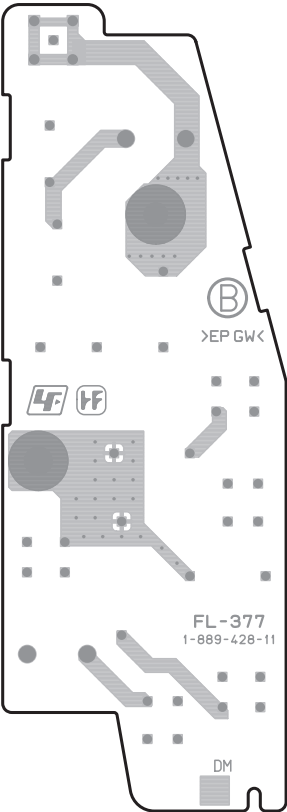

FL-377 -B SIDE-
SUFFIX: -11

LE-392




LE-392 -A SIDE-
SUFFIX: -11




LE-392 -B SIDE-
SUFFIX: -11

MB-1207

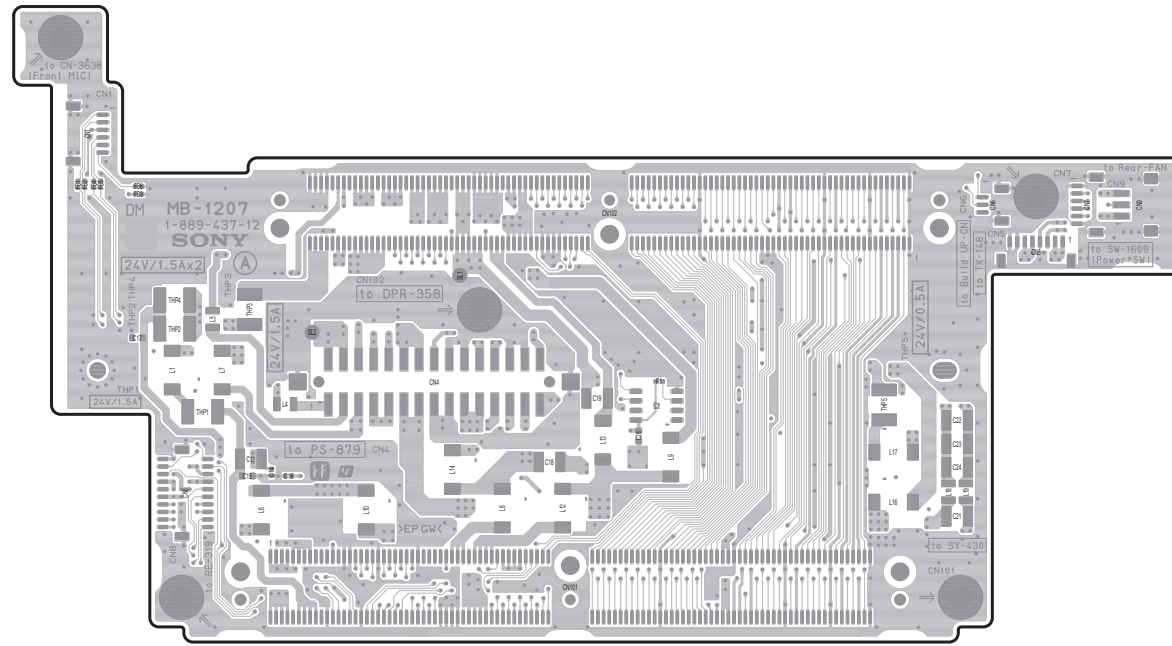


MB-1207 -A SIDE-SUFFIX: -12

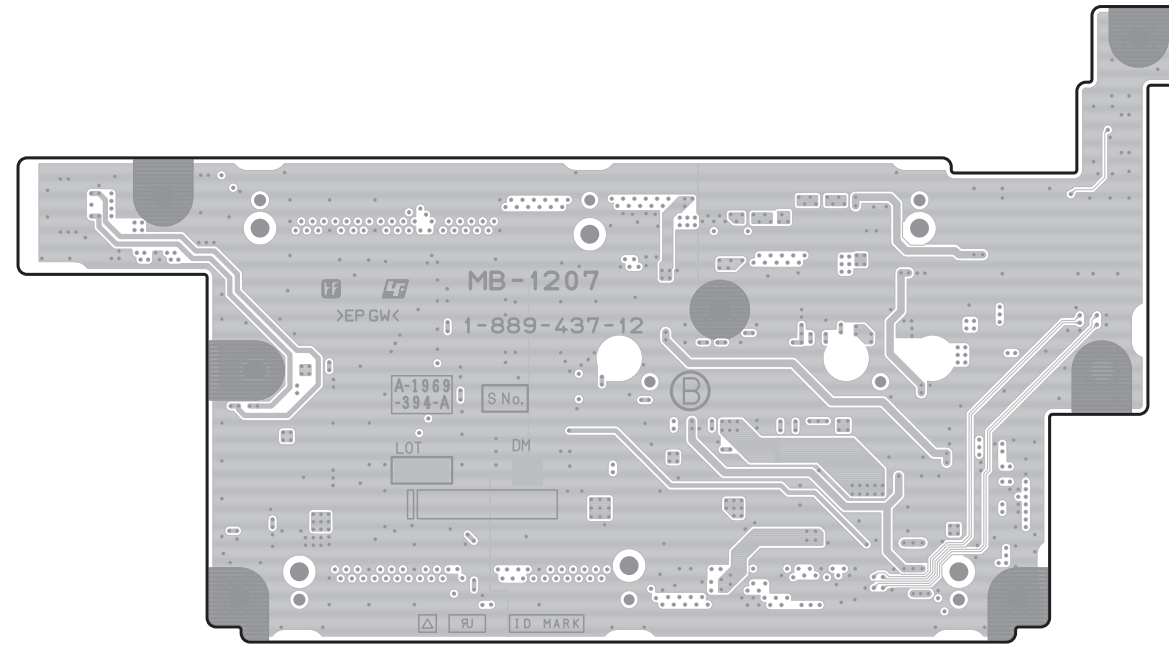


MB-1207 -B SIDE-
SUFFIX: -12

PA-418

The location is described at the end in this section.

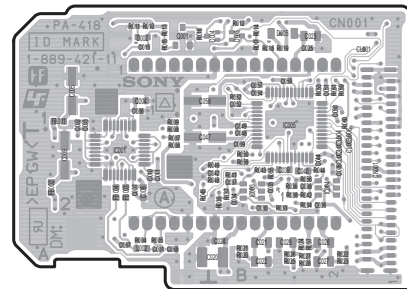



PA-418 -A SIDE-SUFFIX: -11

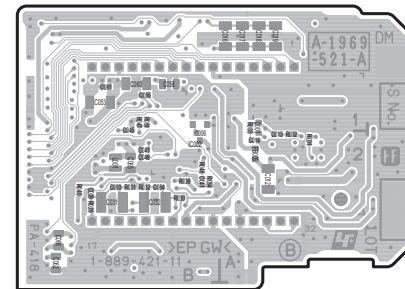

PA-418 -B SIDE-
SUFFIX: -11

The location is described at the end in this section.




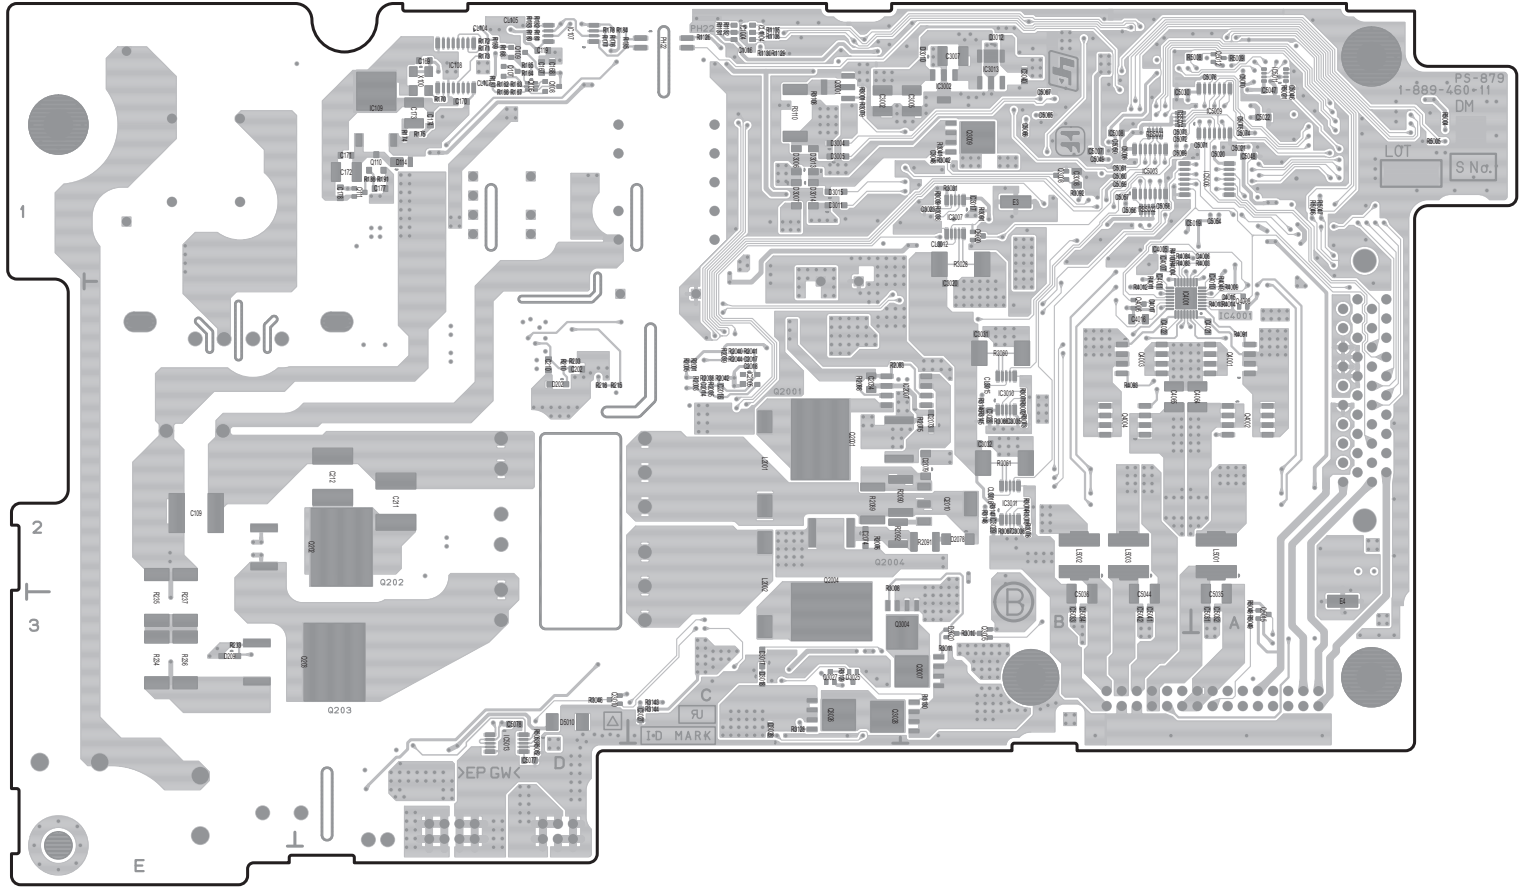


PS-879 -B SIDE-
SUFFIX: -11

RE-319

The location is described at the end in this section.

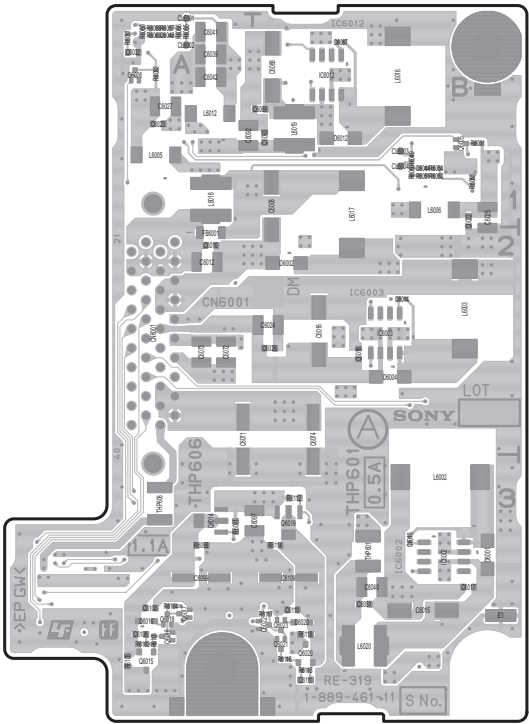


RE-319 -A SIDE-
SUFFIX: -11

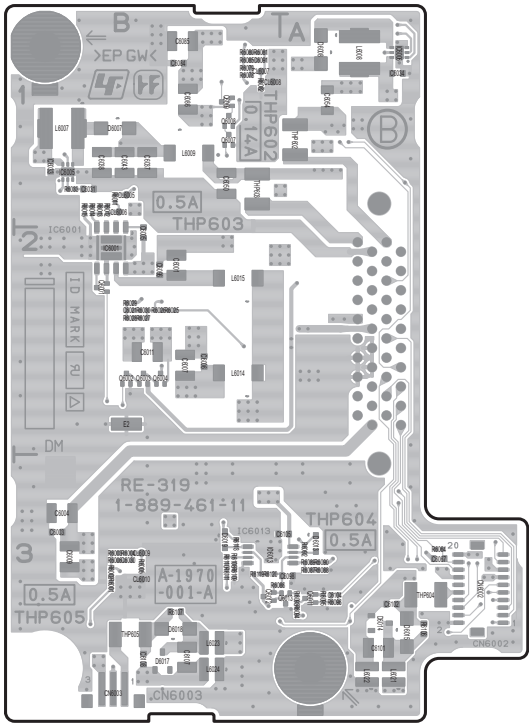


RE-319 -B SIDE-
SUFFIX: -11

SDI-117

The location is described at the end in this section.

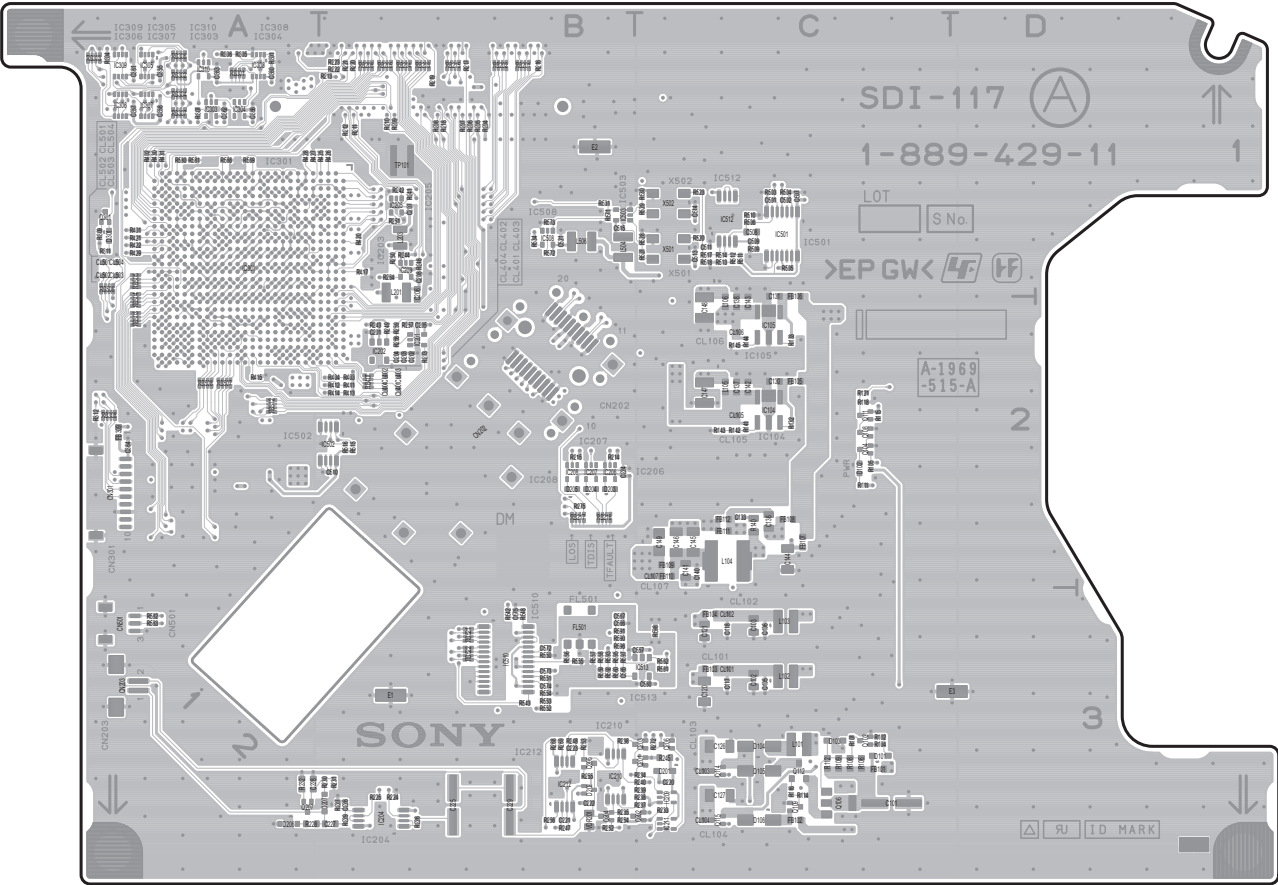


SDI-117 -A SIDE-
SUFFIX: -11

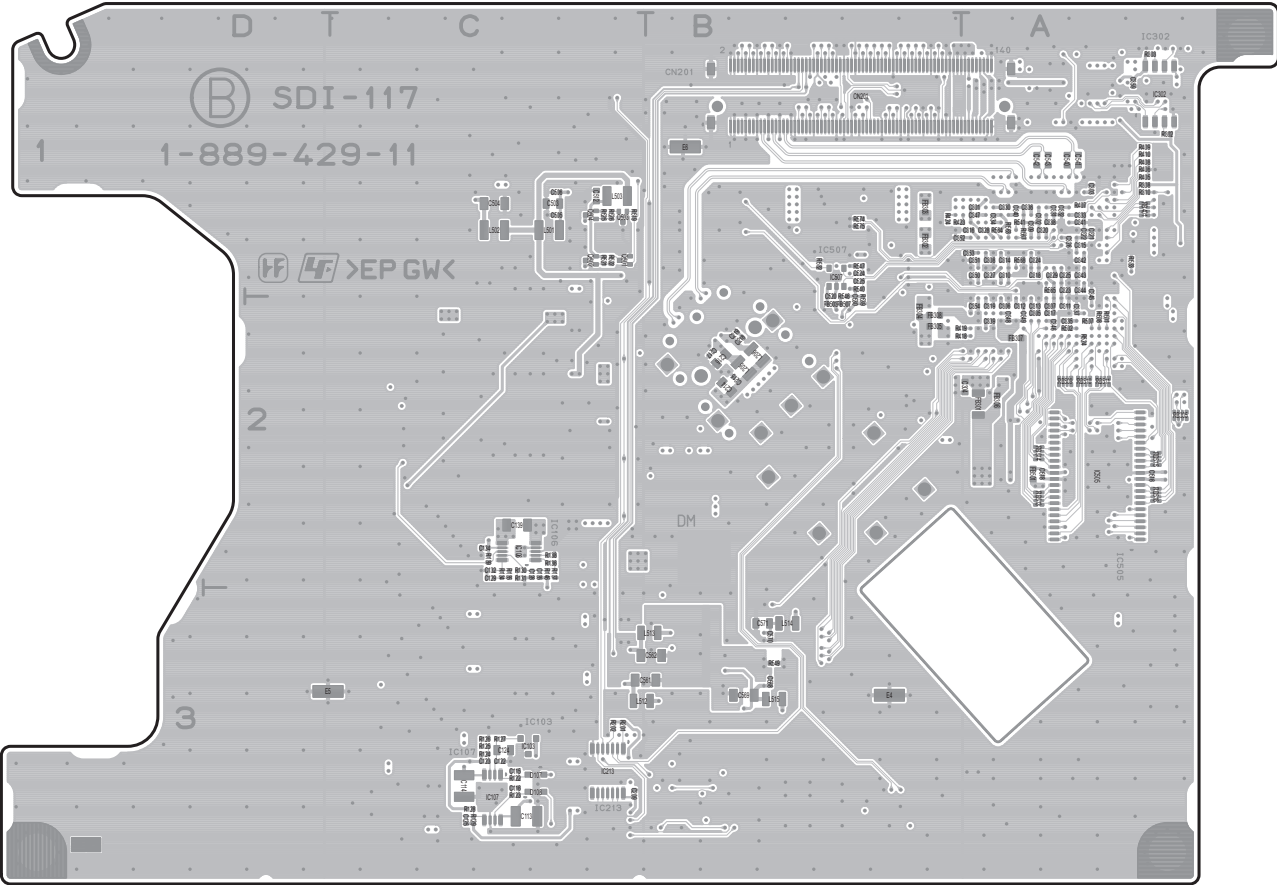

SDI-117 -B SIDE-
SUFFIX: -11

SE-1138

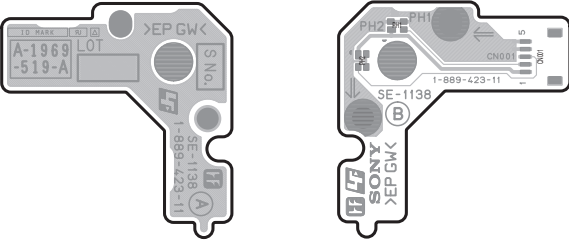

SE-1138 -A SIDE-
SUFFIX: -11

SE-1138 -B SIDE-
SUFFIX: -11


SW-1604



SW-1604 -A SIDE-
SUFFIX: -11

SW-1604 -B SIDE-
SUFFIX: -11


SW-1605

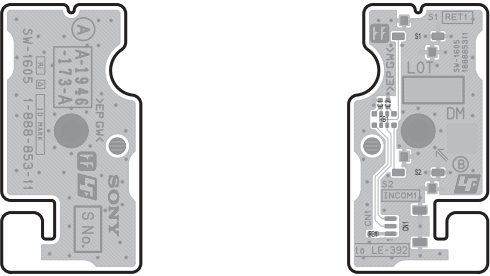

SW-1605 -A SIDE-
SUFFIX: -11

SW-1605 -B SIDE-
SUFFIX: -11


SW-1608

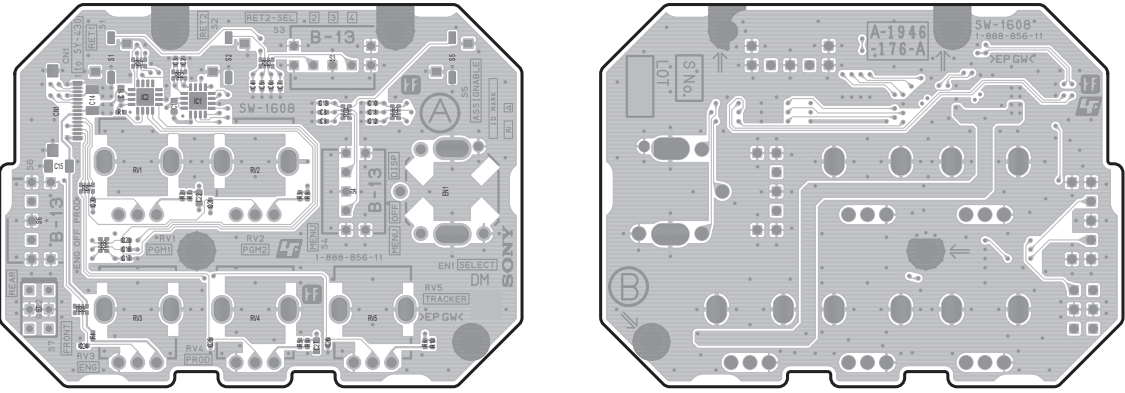

SW-1608/1608A -A SIDE-
SUFFIX: -11

SW-1608/1608A -B SIDE-
SUFFIX: -11

SW-1606

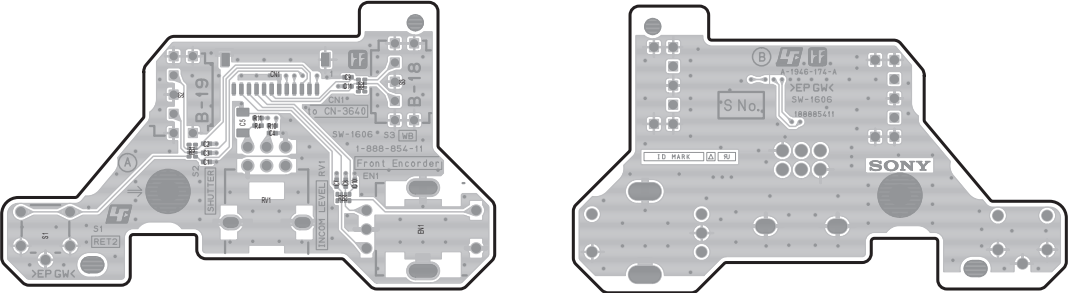

SW-1606 -A SIDE-
SUFFIX: -11

SW-1606 -B SIDE-
SUFFIX: -11


SW-1609



SW-1609 -A SIDE-
SUFFIX: -11

SW-1609 -B SIDE-
SUFFIX: -11

SW-1607

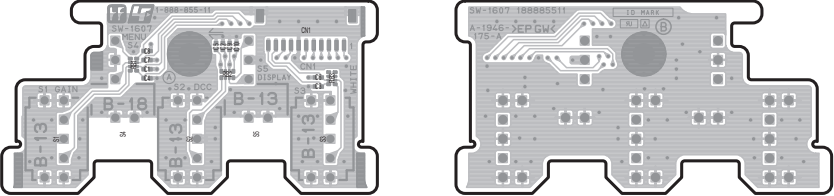


SW-1607 -A SIDE-
SUFFIX: -11


SW-1607 -B SIDE-
SUFFIX: -11

SY-430

The location is described at the end in this section.


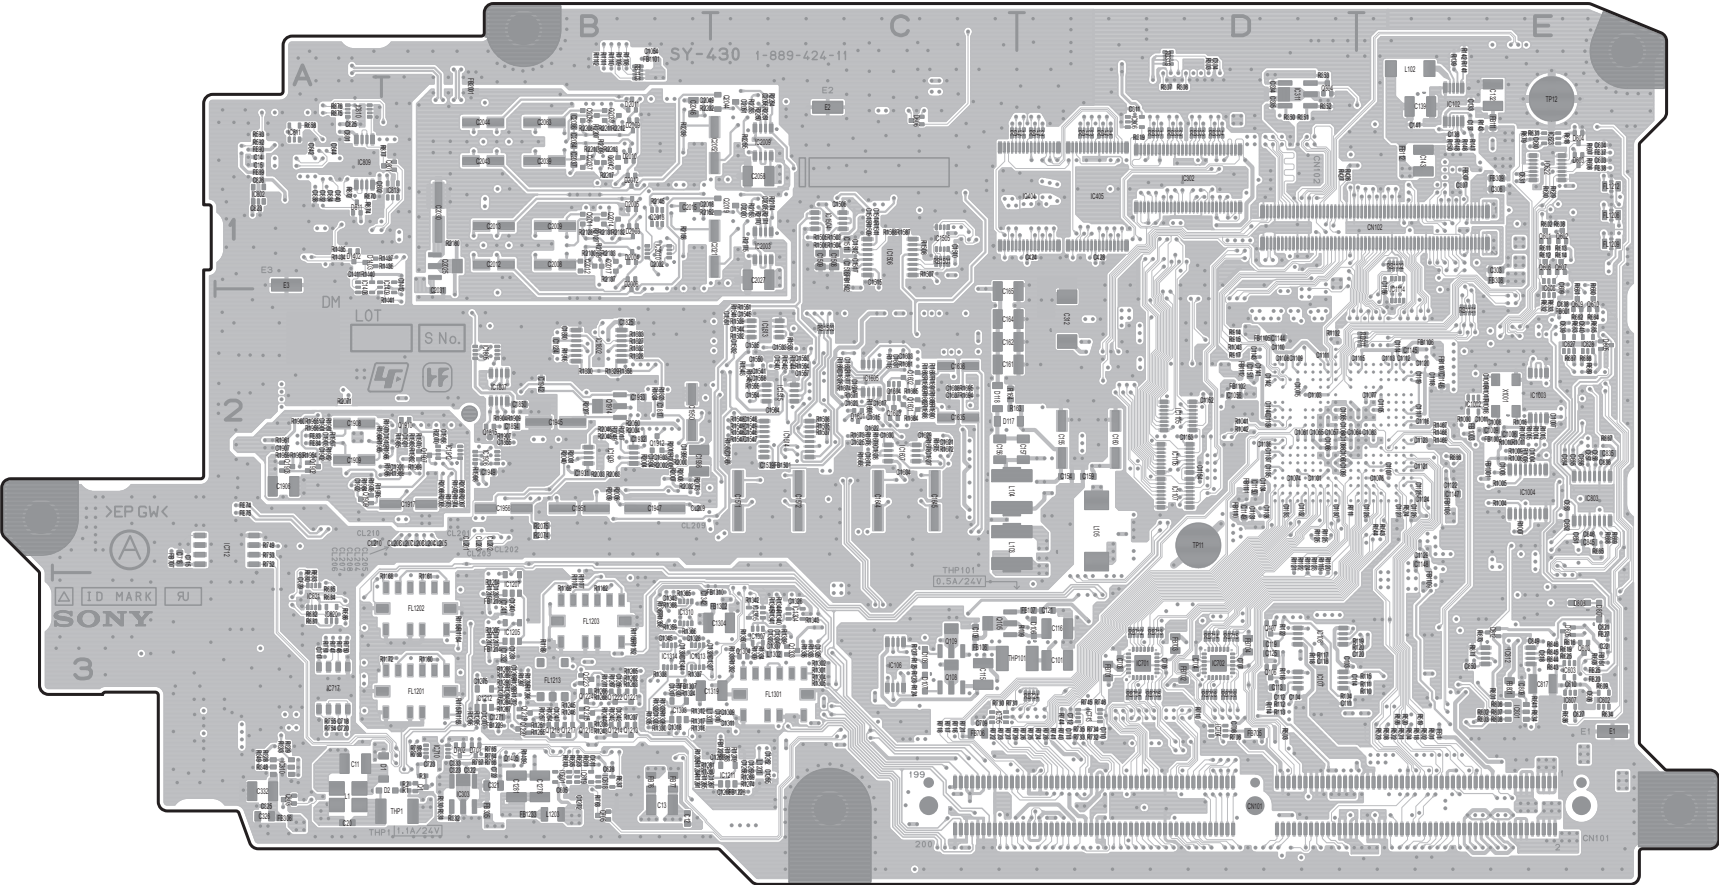


SY-430 -A SIDE-
SUFFIX: -11

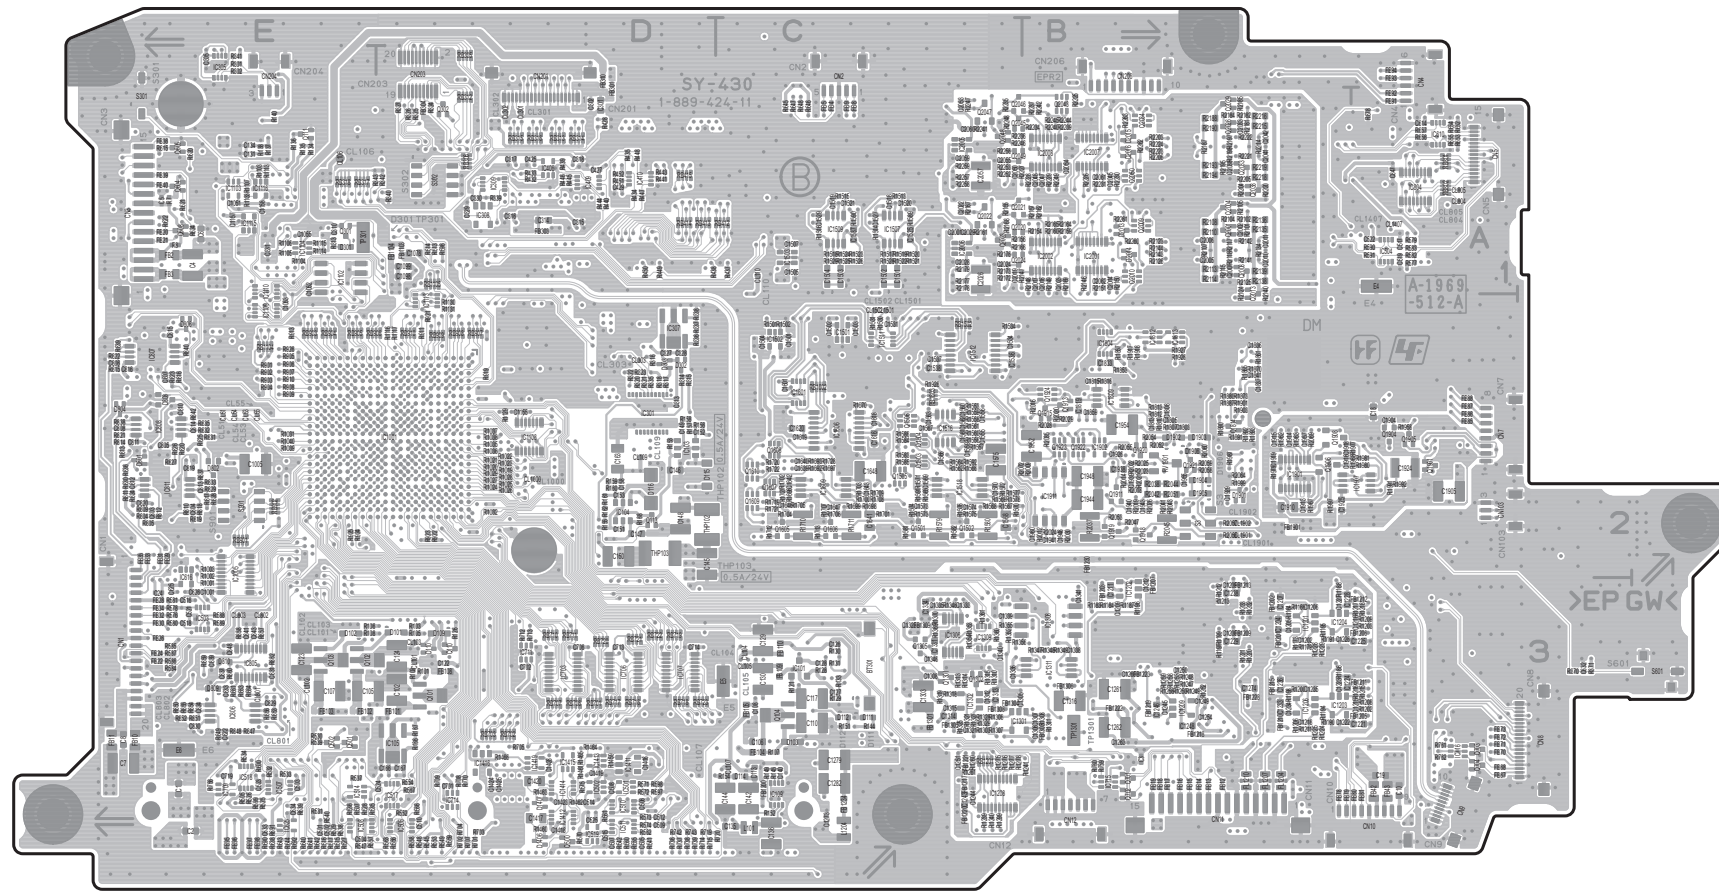


SY-430 -B SIDE-
SUFFIX: -11


The location is described at the end in this section.



TX-148

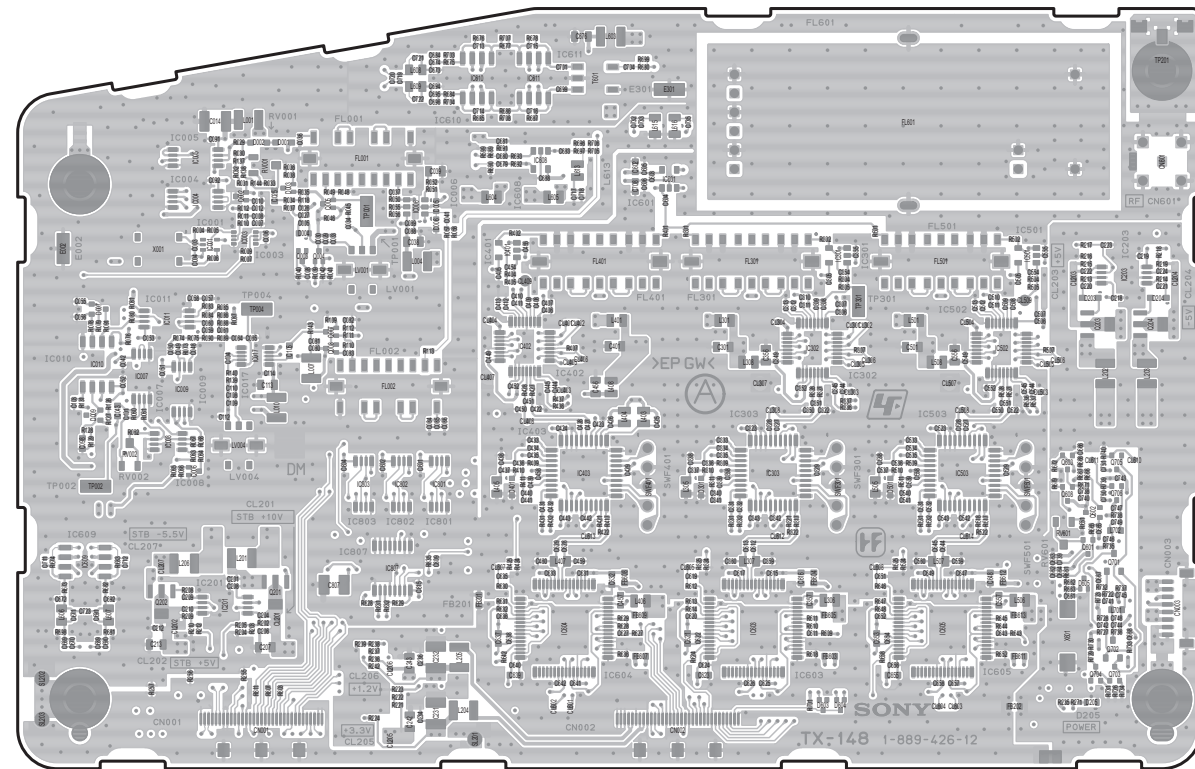

TX-148 -A SIDE-SUFFIX: -12

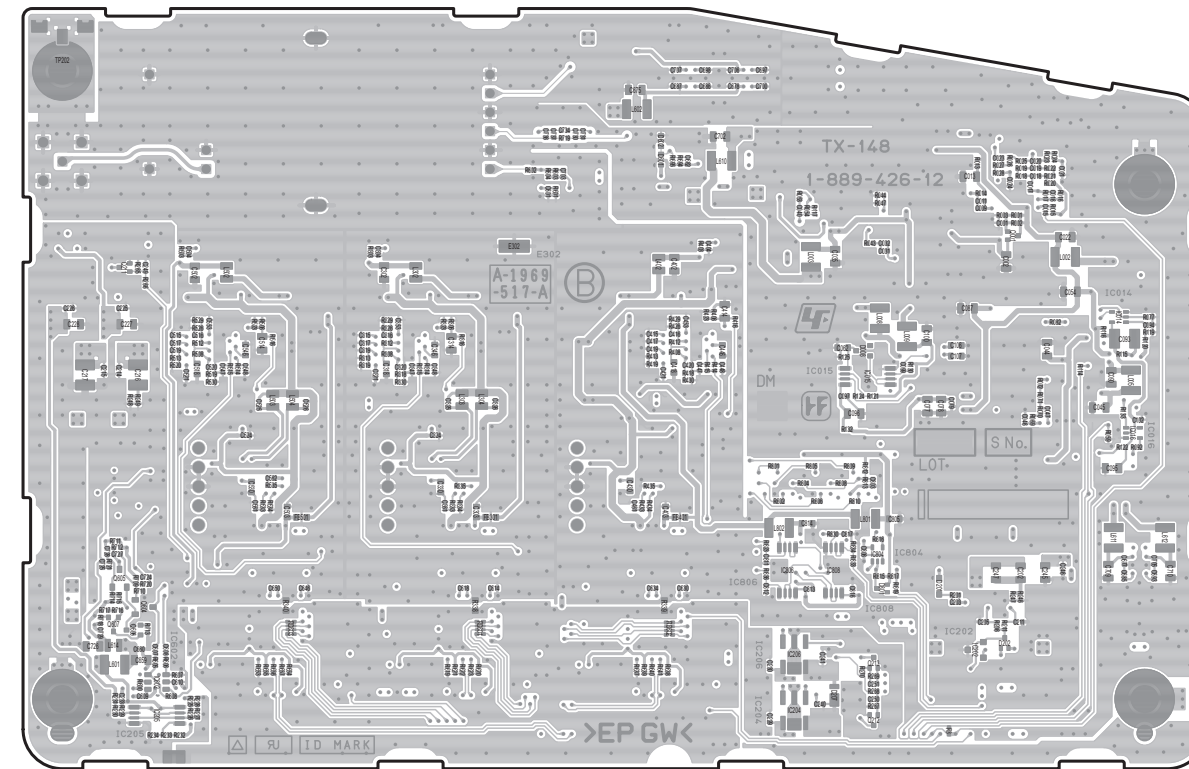

TX-148 -B SIDE-
SUFFIX: -12

Board Parts Location

AT-189E 1-885-937-21 *: B SIDE	C339	* A2	FL100	B1	R205	* B2	R343	* A2	RB415	* B3	CD-78 1-889-430-11 *: B SIDE	C206	D4	C555	E1	C678	E4	C955	D1	C1203	C3	C1358	B4	C1621	* B2	FB106	A4	FB1402	* B1	IC1605	* B2
	C340	B2	FL101	C1	R206	* B2	R344	* A2	RB416	* B3		C301	* C2	C556	E1	C679	* E4	C956	C1	C1204	* C3	C1359	B3	C1622	* B2	FB107	A3	FB1403	* B1	IC1606	* A1
	C400	* A3	FL300	B3	R207	* B2	R345	* A2	RB417	* B3		C302	B2	C557	E1	C680	* E4	C957	C1	C1205	C3	C1360	B3	C1623	* A1	FB108	C3	FB1404	* B2	IC1610	D2
	C401	* A2	FL301	B2	R208	* B2	R346	* A2	RB418	* B3		C303	* C2	C558	E1	C681	* E4	C958	C1	C1206	C3	C1361	B4	C1624	* A1	FB109	B4	FB1405	* B1		
	C100	* A2	C402	* A2	R209	* B2	R347	* A2	RB419	* A3		C304	* B2	C601	* D3	C682	* E4	C1001	D3	C1207	C3	C1362	B3	C1627	* B2	FB110	B4	FB1406	* B2	L101	B3
	C101	* A2	C403	A3	R210	* B2	R349	* A2	RB420	* A3		C102	* D1	C602	* E3	C683	* E4	C1002	* C3	C1208	C3	C1363	B4	C1628	* A1	FB111	B4	FB1407	B1	L102	B3
	C102	* A2	C404	A3	R211	* B2	R350	* B2	RB421	* A3		C103	* C3	C603	* E3	C684	* E4	C1003	D3	C1209	C3	C1364	B4	C1630	* A1	FB112	B4	FB1408	* B2	L104	A4
	C103	* A1	C405	A3	R212	* B2	R351	* B2	RB422	* A3		C104	B3	C604	* E3	C685	* E4	C1004	D3	C1210	B3	C1365	B4	C1631	* A1	FB113	B4	FB1409	A2	L105	A4
	C104	B1	C406	A3	R213	* B2	R352	* B2	RB423	* C3		C105	B3	C605	* E3	C686	* E4	C1005	D3	C1211	C3	C1366	B3	C1632	* A1	FB114	B4	FB1603	* B3	L106	A3
	C105	C1	C407	A3	R214	* B2	R353	* B2	RB424	* C3		C106	* B3	C606	* E3	C687	* E4	C1006	* C3	C1212	B3	C1367	B4	C1633	* A1	FB115	B4	FB1604	* B2	L107	* B2
	C106	A1	C408	A3	R215	* B2	R354	* B2	RB425	* B3		C107	* B4	C607	* E3	C688	* E4	C1007	D3	C1213	B3	C1368	B4	C1634	A3	FB116	B4	FB1605	* A1	L108	* B1
	C107	B1	C409	A3	R216	* B2	R400	* B3	RB426	* B3		C108	* B3	C608	* E3	C689	* E4	C1008	* D3	C1214	* C3	C1401	A1			FB117	B3	FB1607	* B2	L201	* C4
	C108	B1	C410	A3	R217	* B2	R401	* B3	RB430	* B3		C109	* B3	C609	* E3	C690	* E4	C1009	D3	C1215	* C3	C1402	A1	CL101	* D1	FB118	B3	FB1608	* A1	L202	D4
	C109	C1	C411	A3	R218	* B2	R402	* B3				C110	* C3	C610	* E3	C790	C4	C1010	D3	C1216	* C3	C1403	A1	CL102	* C3	FB119	B3	FB1610	A3	L301	* B2
	C110	B1	C412	A3	R219	* B2	R403	* B3	TP100	A1		C111	* D1	C611	* E3	C801	C1	C1011	* C3	C1217	* C3	C1404	A1	CL103	C3	FB120	B4			L303	* B2
	C111	C1	C413	A3	R220	* B2	R404	* B3	TP101	A1		C112	* C3	C612	* E3	C802	C1	C1012	* C3	C1218	* C3	C1405	* A1	CL104	B3	FB121	* C3	IC101	* B4	L401	* D2
	C112	B1	C414	A3	R221	B2	R405	* A3	TP102	C3		C113	* B3	C613	* E3	C803	C1	C1014	* C3	C1219	* C3	C1406	A1	CL105	B3	FB122	* D1	IC102	* B4	L402	* D2
	C113	C1	C415	A3	R222	B2	R406	* A3				C114	* B3	C614	* E3	C804	C2	C1015	* C3	C1220	* C3	C1407	A1	CL106	B4	FB123	B3	IC103	* D1	L403	* D1
	C114	B1	C416	A3	R223	B2	R407	* A3				C115	* D1	C615	* E2	C805	C1	C1016	* D3	C1221	* C3	C1408	A1	CL107	B4	FB124	B3	IC104	* C3	L601	D3
	C115	C1	C417	A3	R224	B2	R408	* A3				C116	* C3	C616	* E2	C806	* C1	C1017	* C3	C1222	* B3	C1409	A1	CL108	B3	FB201	* C4	IC105	* C3	L602	* D4
	C116	B1	C418	A3	R226	B2	R409	* A3	VDR200	C2		C117	B3	C617	* E3	C807	* C2	C1018	* D3	C1223	* B3	C1410	A3	CL701	D4	FB202	E4	IC107	* A4	L603	* D4
	C117	B1	C419	A3	R227	* B2	R410	* A3	VDR201	C2		C118	B3	C618	* E3	C808	* C2	C1019	* C3	C1224	B3	C1411	* B1	CL702	C4	FB203	D4	IC108	* A4	L801	* C2
	C118	C1	C420	* B3	R228	* B2	R411	* B3	X300	* A2		C123	* C3	C619	* E3	C809	* C2	C1020	* C3	C1300	C4	C1412	* A1	CL703	C4	FB204	D4	IC110	* A3	L802	* C2
	C119	C1	C421	C3	R229	* B2	R412	* A3	X301	* B2		C127	* C3	C620	* E3	C810	* C2	C1021	* C3	C1301	B4	C1413	* A1	CL704	D4	FB205	E4	IC111	C2	L803	* C1
	C120	A1	C422	C3	R230	* B2	R414	* B3				C128	B3	C621	* E3	C811	* C2	C1022	* D3	C1302	B4	C1414	* B2	CL705	C4	FB401	D1	IC201	D4	L1201	* C3
	C121	B1	C423	C3	R231	* B2	R415	* B3				C129	B3	C622	* E3	C812	* C1	C1023	* D3	C1303	C4	C1415	* A2	CL706	D4	FB402	D1	IC301	C2	L1202	C3
	C122	B1	C424	C3	R232	* B2	R416	* B3				C131	B3	C623	* E3	C901	* C2	C1024	* C3	C1304	C4	C1416	* B2	CL707	D4	FB403	D1	IC302	* D3	L1203	* C3
	C123	C1	C425	C3	R233	* B2	R417	* B3				C132	B3	C624	* E3	C902	* C2	C1025	* C3	C1305	C4	C1417	* A2	CL708	D4	FB404	* D2	IC303	* D3	L1204	* B3
	C124	A1	C426	B3	R234	B2	R418	* B3				C133	* B4	C625	* E3	C903	* C2	C1026	* C3	C1306	C4	C1418	* B2	CL1300	B4	FB501	* D2	IC304	B2	L1205	B3
	C125	B1	C427	B3	R235	B2	R419	* C3				C134	* A4	C626	* E3	C904	* C2	C1027	* D3	C1307	C4	C1419	* B2	CL1301	B4	FB502	* D2	IC305	* B2	L1206	* C3
	C126	B1	C428	B3	R236	* B2	R420	* B3				C135	* A4	C627	* E3	C905	* C2	C1028	* D3	C1308	C4	C1420	* B2	CL1302	B4	FB503	* D2	IC306	* B2	L1207	* C3
	C127	C1	C429	C3	R237	* B2	R421	* C3				C136	* A3	C628	* E3	C906	* C2	C1029	* C3	C1309	C4	C1421	* A2	CL1303	B3	FB504	* E2	IC308	B2		
	C136	* A1	C430	C3	R239	* B2	R422	* C3				C137	* A4	C629	* E3	C907	* C2	C1030	* C3	C1310	C4	C1422	* A2	CL1307	C4	FB505	* D2	IC309	B2	Q101	* B3
	C138	* A1	C431	C3	R240	* B2	R423	* C3				C138	* A4	C630	* E3	C908	* C2	C1031	* D3	C1311	C4	C1423	* A2	CL1308	C4	FB506	E1	IC401	E2	Q102	* B3
	C140	* A1	C432	C3	R241	* B2	R424	* C3				C139	* A3	C631	* E3	C909	* C2	C1032	* D3	C1312	C4	C1424	* A2	CL1309	C4	FB507	E1	IC402	D1	Q103	* B3
	C142	* A1	C433	B3	R242	C2	R425	* B3				C140	* A4	C632	* E3	C910	* C2	C1033	* D3	C1313	C4	C1425	* A2	CL1310	C3	FB508	E1	IC403	* D1	Q104	B3
	C143	* A1	C434	B3	R243	C2	R426	* B3				C141	* A4	C633	* E3	C911	* C2	C1034	* D4	C1314	C4	C1426	* A2	CL1314	B4	FB509	E1	IC404	D2	Q105	B3
	C144	* A1	C435	B3	R244	C2	R428	* C2				C142	* A3	C634	* E3	C912	* C2	C1035	* C4	C1315	C4	C1427	* A2	CL1315	B4	FB601	* D3	IC501	E2	Q106	* B3
	C200	B2	C436	B3	R245	B2	R429	* C2				C143	* A4	C635	* E3	C913	* C2	C1036	* C3	C1316	C4	C1428	* B2	CL1501	B3	FB602	* E3	IC502	E1	Q107	B3
	C201	B2	C437	B3	R300	* A2	R430	* C2				C144	* A4	C636	* E3	C914	* C2	C1037	* C3	C1317	C4	C1429	* B2	CL1502	B3	FB603	D3	IC601	E3	Q108	B4
	C202	C2	C438	* C2	R301	A2	R432	* A2				C145	* A3	C637	* E3	C915	* C2	C1038	* C3	C1318	C4	C1430	* B1	CL1503	B3	FB604	* D4	IC603	D4	Q109	B4
	C300	B2	C439	C2	R302	* A2	R433	* A2				C146	* A4	C638	* E3	C916	* C2	C1039	* D3	C1319	C4	C1431	* A2	CL1504	B3	FB605	* D4	IC604	* D4	Q1001	C4
	C301	B2	C440	C2	R303	* A2	R435	* B3				C147	* A4	C639	* E2	C917	* C2	C1040	* D3	C1320	C4	C1432	* A2	CL1601	A3	FB606	D4	IC606	E4	Q1401	A2
	C302	B2	C441	C2	R304	B2	R436	* B3				C148	* A4	C640	* E2	C918	* C2	C1041	* D3	C1321	C4	C1433	* A2	CL1602	A3	FB607	E4	IC607	E4		
	C303	B3	C442	C2	R305	B2	R437	* B3				C149	* A4	C641	* E3	C919	* C2	C1042	* D3	C1322	C4	C1434	* A2	CL1603	A3	FB608	E4	IC608	E4	R101	* B3
	C304	B2	C443	C2	R306	* A2	R438	* B3				C150	* A4	C642	* E3	C920	* C2	C1043	* D3	C1323	C4	C1435	* A2	CL1604	A3	FB609	* E4	IC701	D3	R102	* B3
	C305	B2	C444	C2	R307	A2	R440	B3				C151	* A3	C643	* E3	C921	* C2	C1044	* C3	C1324	C4	C1436	* B1			FB610	* E4	IC702	C4	R103	* D1
	C306	B2	C445	C2	R308	A2	R441	B3				C152	A4	C644	* E3	C922	* C2	C1045	* C3	C1325	C4	C1437	* A2	CN201	* B1	FB611	* E4	IC801	C2	R104	* C3
	C307	B2	C446	* A2	R309	C3	R442	B3				C153	A4	C645	* E3	C923	* C2	C1046	* C3	C1326	* C4	C1438	* B2	CN202	E4	FB612	* E4	IC802	C1	R106	* B3
	C308	B2	C447	* A2	R310	B2	R443	B3				C154	A3	C646	* E3	C924	* C2	C1047	* C3	C1327	* C4	C1439	* A2	CN203	C4	FB613	E4	IC803	* C1	R107	* B3
	C309	B2	C448	A3	R311	C3						C155	A4	C647	* E3	C925	* C2	C1048	* C3	C1328	* C4	C1440	* B1	CN701	A4	FB801	C1	IC804	C2	R108	B3
	C310	B2	C449	B3	R312	B2	RB200	* B2				C156	A4	C648	* E3	C926	* C2	C1049	* C3	C1329	C4	C1441	* A1	CN1001	D2	FB802	C1	IC901	D2	R109	* D1
	C311	* A2	C450	A3	R313	B2	RB201	* B2				C157	A3	C649	* E3	C927	* C2														

R156	* A3	R402	D2	R649	E4	R1001	D3	R1519	* B1	RB502	E1	RB901	D1	RB1505	B2	DPR-358 1-889-425-12 *: B SIDE	C225	* C2	C380	A1	C463	* B2	C615	* C1	C762	* C1	C861	* D3	C034	* A1	CL400	B2	
R157	* A4	R403	D2	R650	E4	R1002	D3	R1520	B1	RB503	E1	RB902	C1	RB1506	B2		C226	* D1	C381	* A1	C464	* B2	C619	C1	C763	* C1	C862	* D3	C035	* A1	CL401	B2	
R158	* A4	R404	D2	R651	E4	R1003	D3	R1521	B1	RB504	E1	RB903	C1	RB1507	B2		C227	* D1	C382	A1	C465	* B2	C620	* C1	C764	* C1	C863	* C3	C036	D3	CL402	B2	
R159	* A4	R405	D2	R652	E4	R1004	D3	R1522	B1	RB505	E1	RB904	C1	RB1508	B2		C300	A2	C383	A2	C466	* B2	C622	* D1	C765	* C1	C864	* C3	C037	A1	CL403	B2	
R160	* A4	R406	D2	R654	E4	R1005	* C2	R1523	B1	RB506	E2	RB905	D1	RB1509	B2		C100	D2	C384	A1	C467	* B2	C623	* D1	C766	* C1	C865	* C3	C038	* A2	CL404	B2	
R161	* A3	R407	D2	R655	E4	R1006	* C2	R1524	B2	RB507	E2	RB906	D2	RB1510	B2		C101	* D2	C385	A2	C468	* B2	C624	* D1	C767	* C2	C866	* C3	C039	* A2	CL405	B2	
R162	* A4	R408	D2	R656	E4	R1007	D3	R1525	B2	RB508	E1	RB907	D2	RB1511	B2		C102	* D2	C386	A1	C469	* B2	C625	D1	C768	* C2	C867	* C3	C040	D3	CL406	B2	
R163	* A4	R409	D1	R701	C3	R1008	D3	R1526	B2	RB509	E1	RB908	C1	RB1512	B2		C103	D3	C387	A1	C470	* B2	C626	C1	C769	* C2	C868	* C3	C041	A1	CL407	A2	
R164	* A4	R410	D1	R715	C4	R1009	* D4	R1527	B2	RB510	* E2	RB909	C1	RB1513	A2		C104	D3	C388	* A1	C471	* B3	C627	* D1	C770	* C2	C869	C3	C042	A2	CL408	A2	
R165	* A4	R411	D1	R716	C3	R1010	* D4	R1528	B2	RB511	* E2	RB910	* D2	RB1514	A2		C105	* B3	C389	A1	C472	* B2	C628	* D1	C771	* C2	C870	C3	C043	D3	CL409	A2	
R166	* A3	R412	D2	R717	C3	R1011	D4	R1529	B2	RB512	* E2	RB911	* C2	RB1515	B3		C106	* B3	C390	A2	C473	* B2	C629	C1	C772	* C1	C871	D3	C044	B1	CL410	A2	
R167	* A3	R413	D2	R718	C3	R1012	D3	R1530	A1	RB513	* E2	RB912	* D2	RB1601	A2	C107	* D2	C391	A1	C474	* A1	C630	* D1	C773	* C1	C872	C3	C045	D3	CL411	A2		
R168	* A4	R414	* D1	R719	D3	R1101	D4	R1601	* B2	RB514	* E2	RB913	* D2	RB1602	A2	C108	* B3	C392	A1	C475	* A1	C631	* D1	C774	* C1	C873	* B1	C046	B1	CL412	A2		
R169	* A4	R415	* D2	R720	C3	R1208	C3	R1602	* B2	RB515	* E2	RB914	* D2	RB1603	A2	C109	* D2	C393	A1	C476	A1	C632	C1	C775	* C1	C874	D3	C047	A2	CL413	A2		
R170	* A3	R416	* D1	R721	D3	R1209	C3	R1604	D2	RB516	* E2	RB915	* D2	RB1604	* A2	C110	* B3	C394	A2	C480	* A2	C633	C1	C776	* C1	C875	B1	C048	A2	CL414	A2		
R172	A4	R417	* D1	R722	* A4	R1210	C3	R1605	D2	RB517	* E2	RB916	* D2	RB1605	A2	C111	D3	C395	A2	C481	* A1	C638	* C1	C777	* C2	C876	B1	C049	D3	CL415	B2		
R173	A4	R418	* D2	R723	D4	R1211	C3	R1613	* A2	RB518	* E1	RB917	* C2	RB1606	* A2	C112	D3	C396	A1	C482	* A1	C639	* C1	C778	D2	C877	* B1	C050	B1	CL416	B2		
R174	A4	R419	* D2	R724	D4	R1212	C3	R1614	* A2	RB519	* E1	RB918	* C1	RB1607	* A2	C113	D3	C397	A1	C483	A2	C640	* C1	C779	* C1	C878	* B1	C051	A2	CL501	* C1		
R175	* A4	R420	D2	R725	D4	R1213	C3	R1625	* A2	RB520	* E1	RB919	* C1	RB1608	A2	C114	D3	C398	A1	C484	A1	C641	* C1	C780	* C1	C900	D1	C052	* A3	CL502	* C1		
R176	* A4	R421	* D2	R726	D4	R1214	C3	R1626	* A2	RB521	* E2	RB920	* C1	RB1609	A2	C115	* D2	C399	A1	C485	A1	C642	* D1	C781	B1	C901	D1	C053	* A3	CL503	* C1		
R177	* A3	R422	D2	R727	* A4	R1215	C3	R1631	* B2	RB522	* D1	RB921	* C2	RB1610	A2	C116	* D3	C317	A1	C400	* B2	C500	* C1	C643	* D1	C782	C2	C902	D1	C054	D3	CL506	C2
R178	C3	R423	D2	R728	C3	R1216	B3	R1632	* B2	RB523	* D1	RB922	* C1	RB1611	* B3	C117	* D3	C318	A2	C401	* B2	C501	C3	C700	B1	C783	C2	C903	D1	C055	B1	CL507	C2
R201	B1	R424	D2	R729	C3	R1217	C3	R1633	* A1	RB524	* E1	RB923	* C1	RB1612	* B3	C118	* B3	C319	A2	C402	* B2	C502	C3	C701	B1	C800	* B1	C904	D1	C056	D3	CL508	C1
R202	B1	R425	D2	R730	C4	R1218	C3	R1634	* A1	RB525	* E1	RB924	* C1	RB1613	* A3	C119	* D2	C320	* A1	C403	* B2	C503	* C1	C702	B1	C801	* B1	C905	D1	C057	A2	CL509	C2
R203	B1	R426	E2	R731	C3	R1219	B3	R1635	* B2	RB603	D3	RB925	* C1	RB1614	* A3	C120	* B3	C321	A1	C404	* B2	C504	* C1	C703	* B2	C802	B1	C906	D1	C058	B1	CL510	C2
R204	C1	R427	E2	R732	C4	R1220	B3	R1636	* B2	RB604	D3	RB1001	* C2	RB1615	A3	C121	D3	C322	* A2	C405	* B2	C505	D2	C704	* C3	C803	B1	C907	D1	C059	A2	CL511	C2
R205	B1	R428	D2	R733	* C3	R1221	B3	R1637	* A1	RB605	D3	RB1002	D3	RB1616	A3	C122	D3	C323	* A2	C406	* B2	C506	D2	C705	C3	C804	B1	C908	D1	C060	* A3	CL700	B1
R206	B1	R429	D2	R734	* C3	R1222	C3	R1638	* A1	RB606	D3	RB1003	D3	RB1617	A3	C123	* D2	C324	A1	C407	* B2	C507	D1	C706	* C3	C805	B1	C909	D1	C061	* A3	CL800	C1
R207	B1	R430	D1	R735	D3	R1223	C3	R1643	* A2	RB607	E4	RB1004	D3	RB1618	A3	C124	* B3	C325	* A1	C408	* B2	C508	D1	C707	B3	C806	B1	C910	D1	C062	* A3	CL801	C1
R208	* D4	R431	E2	R736	* C3	R1224	C3	R1644	B3	RB608	E4	RB1005	D3	RB1619	B2	C125	* D3	C326	A2	C409	* B2	C509	D1	C708	* B3	C807	* B1	C911	D1	C063	A2	CL802	C1
R209	* E4	R432	E2	R737	D4	R1225	B3	R1645	A1	RB609	E4	RB1006	D3	RB1620	A3	C126	* D3	C327	A1	C410	* B2	C510	D1	C709	* C2	C808	* B1	C912	D1	C064	D3	CL803	C1
R210	* E4	R433	E2	R738																													

FB121	A2	IC107	* B3	IC2020	* C3	Q910	D2	R181	* D2	R320	A2	R403	B2	R623	C1	R847	C3	R930	* D2	RB502	C3	DR-675 1-889-422-11 *: B SIDE C001 * B2 C002 * B2 C003 * B2 C004 * A2 C005 * B2 C006 * B2 C007 * B2 C008 * B2 C009 B2 C010 B2 C011 B2 C012 B2 C013 * B2 C014 * B2 C015 * B2 C016 * B2 C017 B2 C018 B2 C019 B2 C020 B2 C021 * B2 C022 * B2 C023 B2 C024 A1 C025 A1 C026 A2 C027 A2 C028 B2 C029 B2 C030 B2 C031 B2 C032 B2 C033 B2 C034 * B2 C035 A2 C036 A2 C037 A1 C038 A1 C039 B2 C040 * B2 C041 A2 C042 B2 C043 B2 C044 * B2 C045 * B2 C046 * B2 C047 B1 C048 B1 C049 B1 C050 B1 C051 B1 C052 B1 C053 B1 C054 * B2 C055 * B1 C056 * B1 C057 * B1 C058 * B1 C059 * B1 C060 * B1 C061 A2 C062 A2 C063 * B2 C064 * B2 C065 * B2 C066 * B2 C067 B2 C068 A1 C069 A1 CN002 A2 CN003 B1 CN004 B2 CN005 B2 D001 A1 D002 A1 D003 * B2 D004 A1 D005 B2 D006 B2 D007 * B2 D008 B2 D009 * B1 D010 * B1 ET001 * A1 ET002 * B2 ET003 * A2 FB001 A2 FB002 A2 FB003 A2 FB004 A2 FB005 B2 FB006 B2 FB007 B2 FB008 B2 FB009 B1 FB010 B1 FB011 B1 FB012 B1 FB013 B2 FB014 B2 FB015 * B2 FB016 A1 FB017 A2 FB018 B1 FB019 B1 FB020 B1 IC001 * B2 IC002 B2 IC003 A1 IC004 A2 IC005 B2 IC006 B2 IC007 * B2 IC010 * B1 IC011 A2 IC012 A2 IC013 B2 IC014 B1 IC015 B1 IC016 * B1 IC017 A2 IC018 A1 Q001 * A2 Q002 * A2 Q003 * A2 Q004 * A2 Q005 B1 Q006 B1 Q007 B1 Q008 B1 Q009 B1 Q010 B1 Q011 B2 Q012 B2 Q013 B2 Q014 B2 Q015 B1 Q016 B1 Q017 B1 Q018 B1 Q019 B1 Q020 B1 Q021 B1 Q022 B1 Q023 B1 Q024 B1 Q025 B1 Q026 B1 Q027 B1 Q028 B1 Q029 B1 Q030 B1 Q031 B1 Q032 B1 Q033 B1 Q034 B1 Q035 B1 Q036 B1 Q037 B1 Q038 B1 Q039 B1 Q040 B1 Q041 B1 Q042 B1 Q043 B1 Q044 B1 Q045 B1 Q046 B1 Q047 B1 Q048 B1 Q049 B1 Q050 B1 Q051 B1 Q052 B1 Q053 B1 Q054 B1 Q055 B1 Q056 B1 Q057 B1 Q058 B1 Q059 B1 Q060 B1 Q061 B1 Q062 B1 Q063 B1 Q064 B1 Q065 B1 Q066 B1 Q067 B1 Q068 B1 Q069 B1 R001 * A2 R002 * A2 R003 * A2 R004 * A2 R005 * A2 R006 * A2 R007 * A2 R008 * A2 R009 * A2 R010 * A2 R011 * A2 R012 * A2 R013 * A2 R014 * A2 R015 * A2 R016 * A2 R017 * A2 R018 * A2 R019 * A2 R020 * A2 R021 * A2 R022 * A2 R023 * A2 R024 * A2 R025 * A2 R026 * A2 R027 * A2 R028 * A2 R029 * A2 R030 * A2 R031 * A2 R032 * A2 R033 * A2 R034 * A2 R035 * A2 R036 * A2 R037 * A2 R038 * A2 R039 * A2 R040 * A2 R041 * A2 R042 * A2 R043 * A2 R044 * A2 R045 * A2 R046 * A2 R047 * A2 R048 * A2 R049 * A2 R050 * A2 R051 * A2 R052 * A2 R053 * A2 R054 * A2 R055 * A2 R056 * A2 R057 * A2 R058 * A2 R059 * A2 R091 * B1 R092 * B1 R093 A2 R094 A2 R095 A2 R096 A2 R097 A2 R098 * B1 R099 * B1 RB001 * B2 RB002 B2 RB003 * B2 RB004 B2 PA-418 1-889-421-11 *: B SIDE C001 A2 C002 A1 C003 A1 C004 A1 C005 A1 C006 A1 C007 A2 C008 A2 C009 A2 C010 A2 C011 A2 C012 * A2 C013 * A2 C014 * A2 C015 A1 C016 * A1 C017 * A1 C018 * A1 C019 * A1 C020 B2 C021 B2 C022 B2 C023 B1 C024 B2 C025 B1 C026 B2 C027 B2 C028 B2 C029 * B2 C030 B2 C031 * B2 C032 * B2 C033 B2 C034 B2 C035 B2 C036 B2 C037 B2 C038 B2 C039 B2 C040 B2 C041 * B2 C042 B2 C043 * B2 C044 B2 C045 * B1 C046 * B2 C047 A2 C048 B2 C049 B1 C050 B1 C051 B1 C052 B1 C053 * B1 C054 B1 C055 * B1 C056 A1 C057 B1 C058 * B1 C059 B1 C060 * B1 C061 * B1 C062 * B2 C063 * B2 C064 * B2 C065 * B2 C066 * B2 C067 A2 C068 A2 C069 B2 CL001 B1 CL002 B2 CL003 B2 CL004 B2 CL005 B2 CL006 B2 CN001 B2 D001 * A1 D002 A1 D003 B1 D004 B1 D005 B1 FB001 A1 FB002 A2 FB003 A2 FB004 A2 FB005 * A2 IC001 A2 IC002 * A1 IC003 B2 IC004 B2 IC005 B1 IC006 * B2 L001 * B2 L002 A2 Q001 A1 R001 * A2 R002 * A2 R003 * A1 R004 A2 R005 A2 R006 A2 R007 A2 R008 A1 R009 A1 R010 A1 R011 A1 R012 B1 R013 A1 R014 B1 R015 A1 R016 A1 R017 B1 R018 B1 R019 B1 R020 B2 R021 B2 R022 B2 R023 B2 R024 B2 R025 B2 R026 B2 R027 B2 R028 B2 R029 A1 R030 A1 R031 A1 R032 A1 R033 A1 R034 B1 R035 B1 R036 B1 R037 A2 R038 A1 R039 A1 R040 A2 R041 A2 R042 A2 R043 A2 R044 B2 R045 B2 R046 * B2 R047 * B2 R048 B2 R049 * B2 R050 * B2 R051 A2 R052 A2 R053 A1 R054 A1 R055 A2 R056 A2 R057 A2 R058 A2 R059 B1 R060 B2 R061 B1 R062 B2 R063 B2 R064 B2 R065 B1 R066 B1 R067 B1 R068 B1 R069 B1 R070 B1 R071 B1 R072 B1 R073 B1 R074 B1 R075 B1 R076 B1 R077 B1 R078 B1 R079 B1 R080 B1 R081 * B1 R082 * B1 R083 * B1 R084 * B1 R085 * B1 R086 * B1 R087 * B1 R088 * B1 R089 * B1 R090 * B1 D001 * A1 D002 A1 D003 B1 D004 B1 D005 * B2 D006 B2 D007 * B2 D008 B2 D009 * B1 D010 * B1 ET001 * A1 ET002 * B2 ET003 * A2 FB001 A2 FB002 A2 FB003 A2 FB004 A2 FB005 B2 FB006 B2 FB007 B2 FB008 B2 FB009 B1 FB010 B1 FB011 B1 FB012 B1 FB013 B2 FB014 B2 FB015 * B2 FB016 A1 FB017 A2 FB018 B1 FB019 B1 FB020 B1 IC001 * B2 IC002 B2 IC003 A1 IC004 A2 IC005 B2 IC006 B2 IC007 * B2 IC010 * B1 IC011 A2 IC012 A2 IC013 B2 IC014 B1 IC015 B1 IC016 * B1 IC017 A2 IC018 A1 Q001 * A2 Q002 * A2 Q003 * A2 Q004 * A2 Q005 B1 Q006 * A2 Q007 * B2 Q008 * B2 Q009 * B2 Q010 B2 Q011 * B2 Q012 B2 Q013 * B2 Q014 B2 Q015 * B2 Q016 B2 Q017 * B1 Q018 * B1 R100 * A2 R101 * A2 R102 * A2 R103 A1 R104 A1 R105 A1 R106 * A2 R107 * A2 R108 * A2 R109 * A2 R110 * A2 R111 * A2 R112 * A2 R113 * A2 R114 * A2 R115 * A2 R116 * A2 R117 * A2 R118 * A2 R119 * A2 R120 A3 R121 * D3 R122 * B1 R123 * A2 R124 * A2 R125 * D3 R126 * A2 R127 * B1 R128 * A2 R129 * D3 R130 * B1 R131 * A3 R132 A3 R133 * A2 R134 * A3 R135 * A3 R136 A3 R137 A3 R138 D3 R139 A1 R140 A2 R141 * D3 R142 * D3 R143 * D3 R144 * D3 R145 * D3 R146 * D3 R147 D3 R148 D3 R149 D3 R150 D3 R151 D3 R152 D3 R153 * D2 R154 * D2 R155 * B3 R156 * B3 R157 * D2 R158 * B3 R159 * D2 R160 * D2 R161 * B3 R162 * B3 R163 * D2 R164 * B3 R165 * D2 R166 * D2 R167 * B3 R168 * D3 R169 D3 R170 * D3 R171 D3 R172 D3 R173 * B3 R174 D3 R175 D3 R176 D3 R177 D3 R178 D3 R179 * D2 R180 * B3 R200 * B3 R201 B2 R202 B2 R203 B2 R204 B2 R211 C3 R212 C3 R213 C2 R214 C2 R215 A3 R218 C2 R219 C3 R220 C2 R221 A3 R222 A3 R223 A3 R224 C2 R225 A3 R226 * A2 R227 A2 R232 * A3 R233 * A2 R234 * A2 R235 A2 R236 * A2 R237 B3 R238 B3 R239 * C3 R240 * B3 R241 * C3 R242 * B3 R243 * C3 R244 B3 R245 * B3 R250 C3 R251 C3 R252 B3 R253 * C3 R254 * B3 R257 * B3 R258 * C3 R259 * C3 R260 B3 R261 B3 R262 B3 R265 * B3 R266 * B3 R267 * B3 R268 * B3 R269 * B3 R270 * B3 R271 * C3 R272 * C3 R273 * C2 R274 D2 R275 D2 R276 * C3 R277 * C3 R300 A2 R301 A1 R302 A2 R303 A1 R304 A2 R305 A1 R306 A2 R307 A1 R308 A2 R309 A2 R310 A1 R311 A1 R312 A2 R313 A2 R314 A1 R315 A1 R316 A2 R317 A1 R318 A2 R319 A1 R321 A1 R322 A2 R323 A1 R324 A2 R325 A2 R326 A1 R327 A1 R328 A2 R329 A2 R330 A1 R331 A1 R332 A2 R333 A1 R334 A2 R335 A2 R336 A1 R337 A1 R338 A2 R339 A2 R340 A2 R341 A2 R342 A1 R343 A2 R344 A1 R345 A1 R346 A1 R347 A1 R348 * A2 R349 A1 R350 A1 R351 A1 R352 A1 R353 A1 R354 A2 R355 A1 R356 A2 R357 A1 R358 A2 R359 A2 R360 A1 R361 * A2 R362 * A2 R363 A1 R364 A1 R365 * A2 R366 A1 R367 A1 R368 A2 R369 A2 R370 A1 R371 A2 R372 A2 R373 * A2 R374 A1 R375 A1 R376 * A2 R377 * A2 R378 A2 R379 A1 R380 A1 R381 A1 R382 A2 R383 A2 R384 A2 R385 * A2 R386 * A2 R387 A1 R388 A1 R389 A1 R390 A1 R391 * A1 R392 A1 R393 A1 R394 A1 R395 A1 R396 A1 R397 A1 R398 A1 R399 A1 R400 B2 R401 * B2 R402 * B2 R404 * B2 R405 B2 R406 * B2 R407 * B2 R408 B2 R409 * B2 R410 * D1 R411 * B2 R412 * B2 R413 * B2 R414 B2 R415 * B2 R416 B2 R417 * B2 R418 * B2 R419 * B2 R420 * B2 R421 * B2 R422 * B2 R424 * B2 R425 B2 R426 * B2 R427 B2 R428 * B2 R429 * B2 R430 * B2 R431 * B2 R432 B2 R433 A1 R434 A1 R435 B2 R436 B2 R437 B2 R438 B2 R439 * B2 R440 A2 R451 A2 R452 A2 R500 * D1 R501 D2 R502 D2 R503 * D1 R504 * D1 R505 D2 R506 * B1 R507 * B1 R508 * B1 R509 C1 R510 C1 R511 * D1 R512 * D1 R513 * D1 R514 * B1 R515 * B1 R516 * B1 R517 D2 R518 D2 R519 D2 R520 D2 R521 * C1 R522 C1 R600 * C2 R601 * C2 R602 C2 R603 C2 R604 C2 R605 C2 R606 C2 R609 * D1 R610 C1 R611 C1 R612 * C1 R613 * C1 R614 * D1 R615 * D1 R616 * D1 R617 * D1 R618 D1 R620 * D1 R621 * D1 R622 * D1 R624 * C2 R625 * C2 R626 * C2 R627 C1 R628 * D1 R629 * D1 R630 C2 R631 * C2 R632 * D1 R700 B1 R701 B1 R702 B1 R703 * B2 R704 B3 R705 * C1 R706 * B2 R707 * C1 R708 * C3 R709 * C1 R710 C2 R711 * C2 R712 * D2 R713 * D2 R714 * D2 R715 * C1 R716 B2 R717 C1 R718 C1 R719 * C2 R720 * C2 R721 * C3 R722 * C2 R723 * B2 R724 * C2 R725 * C2 R726 * C2 R727 * C2 R801 * B1 R802 * B1 R803 * B1 R804 * B1 R805 * B1 R806 * B1 R807 B1 R808 * B1 R809 C1 R811 * B1 R812 * B1 R813 B1 R814 B1 R815 B1 R816 B1 R818 B1 R819 B1 R820 B1 R821 B1 R822 B1 R823 C1 R824 C2 R825 C2 R826 C2 R827 * C2 R828 * C2 R829 D2 R830 C2 R831 C2 R832 D3 R833 C3 R834 C3 R835 C3 R836 C3 R837 C3 R838 C3 R839 C3 R840 D3 R841 C3 R842 C3 R843 C3 R844 D3 R845 C3 R846 C3 R848 D3 R849 C3 R850 C3 R851 C3 R852 D3 R853 D3 R854 C3 R855 C3 R856 C3 R857 C3 R858 D3 R859 D3 R860 D3 R861 D3 R862 D3 R863 C3 R864 C3 R865 C3 R866 C3 R867 C3 R868 C3 R869 C3 R870 C3 R871 C3 R872 C3 R873 D3 R874 C3 R875 C3 R876 C3 R877 C3 R878 C3 R879 D3 R880 C3 R881 C3 R882 C3 R883 D3 R884 C3 R885 D3 R886 C3 R887 C3 R888 C3 R889 D3 R890 C3 R891 C3 R892 C3 R893 * B1 R894 * B1 R895 * B1 R896 B1 R897 C1 R898 B1 R899 C1 R900 D1 R901 * D1 R902 * D1 R903 D1 R904 * D1 R905 D1 R906 * D1 R907 D1 R908 * D1 R909 * D1 R910 * D1 R911 * D1 R912 * D1 R913 * D1 R914 * D1 R915 * D1 R916 * D1 R917 * D1 R918 * D1 R919 * D1 R920 D1 R921 * D2 R922 * D2 R923 * D2 R924 D1 R925 * D2 R926 * D1 R927 * D1 R928 * D2 R929 * D2 RB503 C3 RB506 * D1 RB507 * D1 RB508 * D1 RB509 * D1 RB510 * B1 RB511 * B1 RB512 * B1 RB513 * B1 RB514 * D1 RB515 * B1 RB600 C2 RB601 * C2 RB602 * C2 RB603 * C2 RB604 * C2 RB605 C2 RB606 C2 RB607 C2 RB608 C2 RB609 C2 RB610 C2 RB611 * C2 RB612 C2 RB700 C3 RB701 * D2 RB703 C2 RB704 * C3 RB705 B2 RB706 B2 RB800 * B1 RB801 C1 RB802 C1 RB803 C2 RB804 C2 RB805 C2 RB806 C2 RB807 D2 RB808 C2 RB809 C2 RB810 D2 RB811 D2 RB900 D1 RB901 D1 RB907 * D2 TP201 D2 TP202 D2 TP400 B2 TP401 B3 TP402 B3 TP403 B3 TP800 B1 TP801 C1 TP802 D3 TP803 D3 TP804 C3 TP805 D3 TP900 D2 TP901 D2 X900 D2 X901 D2 X902 D2 C001 * B2 C002 * B2 C003 * B2 C004 * A2 C005 * B2 C006 * B2 C007 * B2 C008 * B2 C009 B2 C010 B2 C011 B2 C012 B2 C013 * B2 C014 * B2 C015 * B2 C016 * B2 C017 B2 C018 B2 C019 B2 C020 B2 C021 * B2 C022 * B2 C023 B2 C024 A1 C025 A1 C026 A2 C027 A2 C028 B2 C029 B2 C030 B2 C031 B2 C032 B2 C033 B2 C034 * B2 C035 A2 C036 A2 C037 A1 C038 A1 C039 B2 C040 * B2 C041 A2 C042 A2 C043 B2 C044 * B2 C045 * B2 C046 * B2 C047 B1 C048 B1 C049 B1 C050 B1 C051 B1 C052 B1 C053 B1 C054 * B2 C055 * B1 C056 * B1 C057 * B1 C058 * B1 C059 * B1 C060 * B1 C061 A2 C062 A2 C063 * B2 C064 * B2 C065 * B2 C066 * B2 C067 B2 C068 A1 C069 A1 CN002 A2 CN003 B1 CN004 B2 CN005 B2 D001 A1 D002 A1 D003 * B2 D004 B2 D005 * B2 D006 B2 D007 * B2 D008 B2 D009 * B1 D010 * B1 ET001 * A1 ET002 * B2 ET003 * A2 FB001 A2 FB002 A2 FB003 A2 FB004 A2 FB005 B2 FB006 B2 FB007 B2 FB008 B2 FB009 B1 FB010 B1 FB011 B1 FB012 B1 FB013 B2 FB014 B2 FB015 * B2 FB016 A1 FB017 A2 FB018 B1 FB019 B1 FB020 B1 IC001 * B2 IC002 B2 IC003 A1 IC004 A2 IC005 B2 IC006 B2 IC007 * B2 IC010 * B1 IC011 A2 IC012 A2 IC013 B2 IC014 B1 IC015 B1 IC016 * B1 IC017 A2 IC018 A1 Q001 * A2 Q002 * A2 Q003 * A2 Q004 * A2 Q005 B1 Q006 * A2 Q007 * B2 Q008 * B2 Q009 * B2 Q010 B2 Q011 * B2 Q012 B2 Q013 * B2 Q014 B2 Q015 * B2 Q016 B2 Q017 * B1 Q018 * B1 R100 * A2 R101 * A2 R102 * A2 R103 A1 R104 A1 R001 * A2 R002 * A2 R003 * A2 R004 * B2 R005 * B2 R006 * B2 R007 * B2 R008 * A1 R009 * A2 R010 * A2 R011 * A1 R012 * A1 R013 * A1 R014 * A1 R015 * A1 R016 * A1 R017 * A1 R018 * A1 R019 * A1 R020 * A1 R021 * A1 R022 * A1 R023 * A1 R024 * A1 R025 * A1 R026 * A1 R027 * A1 R028 * A1 R029 * A1 R030 * A1 R031 * A1 R032 * A1 R033 * A1 R034 * A1 R035 * A1 R036 * A1 R037 * A1 R038 * A1 R039 * A1 R040 * A1 R041 * A1 R042 * A1 R043 * A1 R044 * A1 R045 * A1 R046 * A1 R047 * A1 R048 * A1 R049 * A1 R050 * A1 R051 * A1 R052 * A1 R053 * A1 R054 * A1 R055 * A1 R056 * A1 R057 * A1 R058 * A1 R059 * A1 R091 * B1 R092 * B1 R093 A2 R094 A2 R095 A2 R096 A2 R097 A2 R098 * B1 R099 * B1 RB001 * B2 RB002 B2 RB003 * B2 RB004 B2 PA-418 1-889-421-11 *: B SIDE C001 A2 C002 A1 C003 A1 C004 A1 C005 A1 C006 A1 C007 A2 C008 A2 C009 A2 C010 A2 C011 A2 C012 * A2 C013 * A2 C014 * A2 C015 A1 C016 * A1 C017 * A1 C018 * A1 C019 * A1 C020 B2 C021 B2 C022 B2 C023 B1 C024 B2 C025 B1 C026 B2 C027 B2 C028 B2 C029 * B2 C030 B2 C031 * B2 C032 * B2 C033 B2 C034 B2 C035 B2 C036 B2 C037 B2 C038 B2 C039 B2 C040 B2 C041 * B2 C042 B2 C043 * B2 C044 B2 C045 * B1 C046 * B2 C047 A2 C048 B2 C049 B1 C050 B1 C051 B1 C052 B1 C053 * B1 C054 B1 C055 * B1 C056 A1 C057 B1 C058 * B1 C059 B1 C060 * B1 C061 * B1 C062 * B2 C063 * B2 C064 * B2 C065 * B2 C066 * B2 C067 A2 C068 A2 C069 B2 CL001 B1 CL002 B2 CL003 B2 CL004 B2 CL005 B2 CL006 B2 CN001 B2 D001 * A1 D002 A1 D003 B1 D004 B1 FB001 A1 FB002 A2 FB003 A2 FB004 A2 FB005 * A2 IC001 A2 IC002 * A1 IC003 B2 IC004 B2 IC005 B1 IC006 * B2 L001 * B2 L002 A2 Q001 A1 R001 * A2 R002 * A2 R003 * A1 R004 A2 R005 A2 R006 A2 R007 A2 R008 A1 R009 A1 R010 A1 R011 A1 R012 B1 R013 A1 R014 B1 R015 A1 R016 A1 R017 B1 R018 B1 R019 B1 R020 B2 R021 B2 R022 B2 R023 B2 R024 B2 R025 B2 R026 B2 R027 B2 R028 B2 R029 * B2 R030 * B2 R031 * B2 R032 * B2 R033 B2 R034 B2 R035 B2 R036 B2 R037 B2 R038 B2 R039 * B2 R040 * B2 R041 * B2 R042 B2 R043 B2 R044 B2 R045 A2 R046 * B2 R047 * B1 R048 B2 R049 B2 R050 B2 R051 * B1 R052 B1 R053 B1 R05
-------	----	-------	------	--------	------	------	----	------	------	------	----	------	----	------	----	------	----	------	------	-------	----	---

R061	B1	PS-879 1-889-460-11 *: B SIDE	C3012	B2	C5023	A1	CL5004	A1	IC102	D1	Q3010	* D3	R177	* D1	R2038	* C2	R3121	C3	R5041	A1	RE-319 1-889-461-11 *: B SIDE	CL6009	* B3	R6006	* B3	SDI-117 1-889-429-11 *: B SIDE	C314	* A1	C567	B3
	B1		C3015	B1	C5024	A1	CL5007	A1	IC105	D1	Q3011	B2	R178	* D1	R2039	* C2	R3122	C3	R5042	A1		CL6010	* B3	R6011	* B1		C315	* A1	C568	* B3
			C3016	C3	C5027	A1	CL5008	A1	IC107	* D1	Q3012	B2	R180	* D1	R2040	* C2	R3123	C3	R5043	A1			R6012	* B1	C316	* A1	C569	* B3		
			C3017	* B1	C5030	* B1	CL5009	A1	IC108	* D1	Q3013	D3	R181	* D1	R2041	* C2	R3124	C3	R5044	A1			R6013	* B1	C317	* A2	C570	* B3		
			C3018	B2	C5031	* A3			IC109	* D1	Q3014	B2	R182	* D1	R2042	* C2	R3125	C3	R5045	A3			R6014	* B1	C318	* A1	C571	* B3		
			C3019	C3	C5032	* A3	CN100	E3	IC201	D2	Q3015	B2	R183	* D1	R2044	* C2	R3126	C3	R5046	* A1			R6015	* B1	C319	* A2	C572	B3		
			C3020	* B2	C5033	* B3	CN101	E3	IC202	D2	Q3018	B1	R184	* D1	R2075	* B2	R3127	C3	R5047	* A1			R6025	* B2	C320	* A1	C573	B3		
			C3021	B1	C5034	* B3	CN3001	D3	IC1001	C1	Q3019	C3	R185	* D1	R2076	* C2	R3128	* C3	R5048	* A3			R6026	* B2	C321	* A1	C574	B3		
			C3022	C3	C5035	* A3	CN5001	A1	IC1003	C1	Q3020	* B1	R186	* D1	R2079	C2	R3129	* C3	R5049	* A3			R6027	* B2	C322	* A1	C575	B3		
			C3023	* B1	C5036	* B3	CN5002	A3	IC1004	* C1	Q3026	* C3	R187	* D1	R2080	C2	R3130	* B3	R5052	* D3			R6028	* B2	C323	* A1				
			C3025	B1	C5037	D3	CN5004	D3	IC1005	C1	Q3027	* C3	R191	* D1	R2083	* C2	R3131	C3	R5053	* D3			R6029	* B2	C324	* A1	CL101	C3		
			C3026	B1	C5038	D3	CN5007	A2	IC2005	* C2	Q3028	* C3	R201	D2	R2088	* C2	R3133	C3	R5056	D3			R6030	* B2	C325	* A1	CL102	C3		
			C3027	* C3	C5041	* B3			IC2007	* B2	Q3029	C3	R203	* D2	R2089	* C2	R3135	C3	R5057	A1			R6031	B1	C326	* A1	CL103	C3		
			C3028	* B2	C5042	* B3	D101	E2	IC2009	C2	Q4001	* A2	R204	D2	R2090	* B2	R3136	C3					R6032	A1	C327	* A1	CL104	C3		
			C3029	* B2	C5044	* B3	D102	D1	IC3001	B1	Q4002	* A2	R205	D2	R2091	* B2	R3137	C3	RB5001	* B1			R6033	* B1	C328	* A1	CL105	C2		
			C3030	D3	C5045	D3	D103	D1	IC3002	* B1	Q4003	* B2	R206	D2	R2092	* C2	R3138	C3	RB5002	* B1			R6037	A1	C329	* A1	CL106	C2		
			C3031	* B2	C5046	* A1	D104	D1	IC3004	C3	Q4004	* B2	R207	D2	R2095	B2	R3140	C3	RB5004	* B1			R6049	B1	C330	* A1	CL107	C2		
			C3032	* B2	C5047	* A1	D105	D1	IC3005	B1	Q4006	* B2	R210	* D2	R2096	B2	R3142	C3	RB5005	B1			R6050	B1	C331	* A1	CL401	B2		
			C3033	B1	C5048	* A1	D106	D1	IC3006	C3	Q4008	* A2	R211	D2	R2097	B2	R3143	* C3	RB5006	A1			R6051	B1	C332	* A1	CL402	B2		
			C3034	C3	C5049	* B1	D109	D1	IC3007	* B1	Q5001	B1	R212	D2	R3001	* C1	R3144	* C3	RB5007	A1			R6052	B1	C333	* A1	CL403	B2		
			C3035	* B2	C5050	* B1	D110	D1	IC3008	B1	Q5002	B1	R213	D2	R3008	* C2	R3145	* B2	RB5008	A1			R6053	B1	C334	* A1	CL404	B2		
			C3036	* B2	C5051	B1	D111	D1	IC3009	C3	Q5003	B1	R214	D2	R3010	* B3	R3146	* B2	RB5009	A1			R6054	B1	C335	* A2	CL501	A1		
			C3040	* B1	C5052	A1	D114	* D1	IC3010	* B2	Q5004	B1	R215	* D2	R3011	* B3	R3147	* B2					R6055	A1	C336	* A1	CL502	A1		
			C3041	B1	C5053	B1	D202	* D2	IC3011	* B2	Q5005	B1	R216	* D2	R3014	B3	R3148	* B2	RY11	D3			R6056	A1	C337	* A2	CL503	A1		
			C3043	D3	C5054	* A1	D204	D2	IC3013	* B1	Q5006	B1	R217	D3	R3015	B3	R3149	C3	S5001	A1			R6057	A1	C338	* A1	CL504	A1		
			C3044	B2	C5055	A1	D205	D2	IC3014	B2	Q5007	B1	R218	D3	R3016	C3	R4001	B1	S5002	A1			R6058	A1	C339	* A2				
			C3045	B2	C5056	* B1	D206	D3	IC3015	B1	Q5008	B1	R224	D2	R3017	C3	R4002	B1					R6059	A1	C340	* A1	CN201	* B1		
			C3046	A1	C5057	* B1	D207	D2	IC3017	C3	Q5009	B1	R225	D2	R3018	C3	R4003	* A1					R6063	A1	C341	* A1	CN202	B2		
			C3047	A1	C5058	* B1	D208	E2	IC4001	* B2	Q5012	* A1	R228	E2	R3019	C3	R4004	* B1	SL001	E1			R6064	* A3	C342	* A1	CN203	A3		
			C3048	* B1	C5059	* B1	D209	* E3	IC4009	A2	Q5013	A3	R229	D3	R3026	B1	R4005	B1	SL002	E1			R6078	* B1	C343	* A1	CN301	A2		
			C3049	B1	C5060	* B1	D220	D2	IC5001	B1	Q5014	B1	R230	E2	R3027	C3	R4006	A2					R6079	* B1	C344	* A1	CN501	A3		
			C3056	C3	C5061	* B1	D1001	D3	IC5002	B1	Q5015	* A3	R231	D3	R3028	* B1	R4007	A1	T11	D1			R6080	* B1	C345	* A1				
			C3057	C3	C5062	B1	D1002	C1	IC5003	* B1	Q5016	A1	R232	E2	R3029	B1	R4008	B1	T23	C2			R6081	* B1	C346	* A2	D101	C3		
			C3058	C3	C5063	B1	D2001	C2	IC5004	B1	Q5017	D3	R233	* E3	R3030	C3	R4009	* A2					R6082	* B1	C347	* A1	D102	C2		
			C4005	* B1	C5064	B1	D2002	C2	IC5005	A1			R234	* E3	R3031	* B1	R4011	* B2	THP101	C1			R6085	* B1	C348	* A2	D103	C3		
			C4006	* A1	C5065	* B1	D2073	* B2	IC5006	* A1	R105	D1	R235	* E3	R3032	B1	R4012	* B2					R6086	* B3	C349	* A2	D104	C3		
			C4007	* B1	C5066	* B1	D2074	* C2	IC5007	A1	R106	D1	R236	* E3	R303															

																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					</
--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	----

		IC813	B1	IC1909	B2	Q1506	* C2	R108	* E3	R332	B3	R549	* D3	R645	* C1	R753	A2	R868	E2	R1112	B1	R1241	* B3	R1331	C3	R1534	* C2	R1696	* C2	R1972	B2	R2070	B2
IC101	* C3	IC1001	* D2	IC1911	* B2	Q1601	C2	R109	D3	R333	A3	R552	* D3	R646	* C1	R754	A3	R869	E2	R1113	* E1	R1242	B3	R1332	C3	R1535	C2	R1697	* C2	R1973	B2	R2071	A2
IC102	E1	IC1002	E2	IC1912	B2	Q1602	C2	R110	E3	R335	* D2	R553	* D3	R647	* C1	R755	A3	R870	A1	R1114	* E1	R1243	B3	R1333	C3	R1536	C2	R1698	* C2	R1974	B2	R2072	* C2
IC103	* D2	IC1003	E2	IC2001	* B1	Q1603	C2	R111	E3	R336	* D2	R554	* D3	R648	* C1	R756	* E3	R871	E3	R1115	* E1	R1244	B3	R1334	C3	R1537	C2	R1699	* C2	R1976	A2	R2073	B2
IC104	* D2	IC1004	E2	IC2002	* B1	Q1604	C2	R112	D3	R337	* D2	R555	* D3	R652	* A1	R759	* B3	R872	A1	R1116	* D2	R1245	B3	R1335	B3	R1539	C2	R1700	* C2	R1977	* A2	R2074	B2
IC105	* D3	IC1005	* E2	IC2003	C1	Q1605	* C2	R113	D3	R338	* D2	R556	* D3	R653	* A1	R760	* B3	R873	E3	R1117	* D2	R1246	B3	R1336	C3	R1541	C2	R1701	* C2	R1978	A2	R2075	B2
IC106	C3	IC1102	* E1	IC2005	* C1	Q1606	* C2	R114	D3	R339	* D1	R557	* E3	R654	* A1	R761	* A3	R874	A1	R1119	D2	R1247	* B3	R1337	B3	R1542	C2	R1702	* C2	R1979	* B2	R2101	* B1
IC107	D3	IC1103	* E1	IC2006	* C1	Q1607	* C2	R115	E3	R340	* D1	R558	* D3	R655	* A1	R762	* A3	R875	A1	R1120	D2	R1248	* B3	R1338	B3	R1543	C2	R1703	* C2	R1980	* A2	R2102	* B1
IC108	D3	IC1104	* E1	IC2007	* B1	Q1608	* C2	R116	D3	R341	* E1	R559	* D3	R656	* A1	R763	B3	R876	A1	R1121	D2	R1249	* B3	R1339	C3	R1544	C2	R1704	* C2	R1981	* A2	R2104	* B1
IC109	* C3	IC1105	D2	IC2008	* B1	Q1609	* C2	R117	D3	R342	* D1	R560	* D3	R657	* A1	R764	B3	R877	B1	R1122	D2	R1250	* B3	R1340	C3	R1545	C2	R1705	* C2	R1982	B2	R2105	* B1
IC301	* D2	IC1106	D2	IC2009	C1	Q1610	* C2	R118	D3	R343	* E1	R561	* D3	R658	A1	R765	B3	R878	* A1	R1123	D2	R1251	B3	R1341	C3	R1546	C2	R1706	* C2	R1983	B2	R2107	* B1
IC302	D1	IC1107	D2	IC2010	B1	Q1814	* B2	R119	E3	R348	A3	R562	* D3	R660	E2	R766	B3	R901	* E2	R1124	D2	R1252	* B3	R1342	C3	R1547	C2	R1707	* C2	R1984	A2	R2108	* B1
IC303	B3	IC1108	* D2			Q1815	B2	R120	E3	R349	A3	R563	* D3	R661	E2	R767	B3	R902	* E2	R1125	D2	R1253	* B3	R1343	C3	R1548	C2	R1708	* C2	R1985	B2	R2110	* B1
IC305	* E1	IC1109	* E2	L1	A3	Q1901	* A2	R121	* C3	R350	D1	R566	* D3	R662	E2	R768	B3	R903	* E2	R1126	D2	R1254	B3	R1344	C3	R1549	C2	R1709	* C2	R1986	B2	R2113	* B1
IC306	D1	IC1110	* E1	L101	* C3	Q1902	A2	R122	D3	R351	D1	R567	* D3	R663	E2	R769	B3	R904	* E2	R1129	* D2	R1255	B3	R1345	C3	R1551	C2	R1710	* C2	R1987	* B2	R2114	* B1
IC307	* D2	IC1113	* D2	L102	E1	Q1903	A2	R123	C3	R352	D1	R570	* D3	R664	E2	R770	* D3	R905	* E2	R1130	* D2	R1256	* B3	R1346	* C3	R1552	C2	R1711	* C2	R1989	B2	R2115	* B1
IC308	* D1	IC1114	E2	L103	C2	Q1904	* A2	R124	C3	R353	D1	R571	* D3	R665	E2	R801	E3	R906	* E2	R1131	* D2	R1257	B3	R1347	* B3	R1553	* C2	R1712	* C2	R1991	* A2	R2117	* B1
IC309	* D1	IC1115	* E1	L104	C2	Q1905	* A2	R125	C3	R370	* A3	R572	* D3	R679	E1	R802	E3	R907	* E2	R1132	D2	R1258	* B3	R1348	* B3	R1554	C2	R1713	* C2	R1992	* A2	R2118	* B1
IC310	A3	IC1116	* E1	L105	D2	Q1906	* B2	R126	* D3	R371	* A3	R573	* D3	R680	A3	R803	E3	R908	* E2	R1133	* E1	R1259	* B3	R1349	* B3	R1555	C2	R1718	C2	R1997	* B2	R2123	* B1
IC311	D1	IC1201	* B3	L1201	C3	Q1907	B2	R127	C3	R426	D1	R574	* D3	R681	A3	R804	* E2	R909	* E2	R1152	B3	R1260	* C3	R1350	C3	R1556	* C2	R1719	* C2	R1998	B2	R2124	* B2
IC404	D1	IC1202	* B3	L1203	B3	Q1908	* B2	R128	* C3	R427	D1	R575	* D3	R682	A3	R805	* E2	R910	* E2	R1153	B3	R1261	* C3	R1352	* C3	R1557	* C2	R1720	* C2	R1999	* B2	R2125	* B1
IC405	D1	IC1203	* B3	L1204	* C3	Q1909	A2	R129	* C3	R428	* D1	R576	* E3	R683	A3	R806	E3	R911	* D2	R1154	B3	R1262	B3	R1353	* C3	R1558	* C2	R1721	* C2	R2000	B2	R2126	* B1
IC406	* D1	IC1204	* B3	L1301	B3	Q1910	B2	R130	* C3	R432	* D1	R577	* A1	R684	A3	R807	E3	R913	* E2	R1156	B3	R1263	B3	R1354	* C3	R1559	* C2	R1722	* C2	R2002	B2	R2127	B1
IC409	* D1	IC1205	B3	L1302	C3	Q1911	* B2	R131	* C3	R433	* D1	R578	* E3	R685	A3	R808	E3	R914	D2	R1157	B3	R1265	B3	R1355	* C3	R1560	* C2	R1727	* C2	R2004	B2	R2128	B1
IC410	* D1	IC1206	* B3			Q1912	B2	R133	* C3	R434	* D1	R579	* A1	R686	A3	R809	* E2	R915	D2	R1158	B3	R1266	B3	R1356	* C3	R1561	* C2	R1728	* C2	R2005	B2	R2129	B1
IC501	* D3	IC1207	B3	Q1	B3	Q1913	* B2	R134	* E1	R435	* D1	R580	* E3	R687	E2	R810	* E2	R917	D2	R1160	B3	R1267	B3	R1358	B3	R1562	* C2	R1807	* B2	R2007	B2	R2130	B1
IC502	* D3	IC1208	* C3	Q101	* D3	Q1914	B2	R135	* E1	R437	* C1	R581	* E3	R688	E2	R811	* E2	R919	* D2	R1161	B3	R1268	B3	R1359	B3	R1564	* C2	R1810	* B2	R2008	B2	R2131	B1
IC503	* E3	IC1209	* B3	Q102	* E3	Q1915	* B2	R136	* E1	R438	* D1	R582	* A1	R689	E2	R812	* E2	R921	* D2	R1162	B3	R1269	C3	R1360	* C3	R1565	* C2	R1812	* B2	R2009	* B2	R2132	B1
IC504	* A1	IC1211	C3	Q103	* E3	Q1918	* B2	R137	* E1	R439	* D1	R583	* A1	R690	* E3	R813	* E2	R922	* D2	R1164	* B3	R1271	B3	R1361	* C3	R1566	* C2	R1813	* B2	R2012	* B2	R2133	B1
IC506	* D3	IC1212	B3	Q104	* C3	Q1919	* B2	R138	* E1	R440	* D1	R584	* E3	R691	* E3	R814	* E2	R923	* D2	R1166	* B3	R1272	B3	R1365	B3	R1567	* C2	R1816	* B2	R2013	B2	R2134	* B1
IC507	* E3	IC1301	* C3	Q105	C3	Q1920	* B2	R139	E1	R441	* D1	R585	* E3	R692	* E3	R815	* E2	R924	* E2	R1168	B3	R1274	C3	R1366	B3	R1568	* C2	R1823	B2	R2014	* B2	R2135	* B1
IC508	* E3	IC1302	* C3	Q106	D3	Q1921	* B2	R140	* E1	R443	* D1	R586	* E3	R701	* D3	R816	* E2	R925	* E2	R1169	B3	R1275	* C3	R1367	B3	R1569	* C2	R1824	B2	R2016	* B2	R2136	* B1
IC510	* D3	IC1303	B3	Q107	D3	Q1922	* B2	R141	E1	R444	* D1	R587	* E3	R702	* D3	R817	* E2	R926	* E2	R1172	B3	R1276	* C3	R1368	B3	R1570	* C2	R1827	B2	R2017	B2	R2137	B1
IC511	* D3	IC1304	C3	Q108	C3	Q1923	* B2	R142	E1	R445	* D1	R588	* E3	R703	* D3	R818	* E2	R1001	* E3	R1173	* B3	R1277	* C3	R1369	* C3	R1571	* C2	R1828	B2	R2018	* B2	R2138	* B1
IC514	* E3	IC1305	C3	Q109	C3	Q1924	* B2	R143	E1	R446	* D1	R589	* E3	R704	* D3	R819	* E2	R1002	* E2	R1174	B3	R1278	* C3	R1370	* C3	R1572	* C2	R1829	B2	R2019	* B2	R2139	* B1
IC517	* D3	IC1306	* C3	Q110	* D3	Q2001	* B1	R144	* C3	R447	* D1	R590	* A1	R705	* D3	R820	* E2	R1003	* E2	R1177	B3	R1279	C3	R1434	A1	R1573	* C2	R1830	B2	R2020	* B2	R2140	* B2
IC518	* E3	IC1307	C3	Q111	* E1	Q2004	* B1	R145	* C3	R448	* D1	R591	* A1	R706	D3	R821	* E2	R1004	E2	R1179	* B3	R1280	B3	R1435	A1	R1574	* C2	R1832	B2	R2021	* B2	R2141	* B1
IC519	* D3	IC1308	* B3	Q113	* D2	Q2008	* B1	R146	E1	R449	* D1	R592	A1	R707	* D3	R822	* E2	R1005	E2	R1183	* B3	R1281	B3	R1436	B1	R1575	* C2	R1833	B2	R2022	* B2	R2142	* B1
IC601	B3	IC1309	* C3	Q301	* E1	Q2009	* B1	R147	E1	R450	* D1	R593	A1	R708	* D3	R823	* E2	R1006	E2	R1184	* B3	R1283	C3	R1437	B1	R1576	* C2	R1853	* B2	R2023	* B2	R2143	* B1
IC602	E3	IC1310	B3	Q302	* D1	Q2010	* B1	R148	E1	R451	* D1	R595	E3	R709	* D3	R824	* E2	R1007	E2	R1186	* B3	R1284	B3	R1439	B3	R1577	* C2	R1857	* B2	R2024	* B2	R2144	* B1
IC603	E3	IC1311	* B3	Q303	A3	Q2011	B1	R149	* C3	R452	* D1	R596	* D1	R710	D3	R825	* E2	R1008	E2	R1187	* B3	R1285	B3	R1440	A1	R1578	* C2	R1858	B2	R2025	* B2	R2145	B1
IC606	E1	IC1313	B3	Q304	D1	Q2012	B1	R150	E1	R501	E3	R597	* D3	R711	D2	R826	* E2	R1009	E2	R1188	* B3	R1287	B3	R1441	B2	R1579	* C2	R1861	* B2	R2026	* B2	R2146	* B1
IC607	E3	IC1314	B3	Q500	* D3	Q2013	* B2	R151	* C3	R502	E3	R598	* D3	R712	* D3	R827	* E2	R1010	E2	R1189	B3	R1288	B3	R1459	* D3	R1580	* C2	R1865	* B2	R2027	B2	R2147	* C1
IC610	* A1	IC1408	A1	Q501	* E3	Q2014	B1	R152	* C3	R503	D3	R599	* E3	R713	* D3	R828	* E2	R1011	E2	R1190	* B3	R1289	B3	R1460	* D3	R1581	* C2	R1870	* B2	R2028	* B2	R2148	* B1
IC611	A1	IC1409	B1	Q502	* E3	Q2017	B1	R153	* D2	R504	E3	R600	* E3	R714	* D3	R829	* E2	R1012	E2	R1191	* B3	R1290	B3	R1461	* D3	R1582	* C2	R1873	* B2	R2029	* B2	R2149	* B1
IC616	* E2	IC1411	* D3	Q601	E1	Q2018	B1	R154	* C3	R505	* E3	R601	B3	R715	* D3	R830	* E2	R1013	E2	R1194	* B3	R1291	B3	R1462	* D3	R1583	* C2	R1880	* B2	R2030	* B2	R2150	* B1
IC618	B3	IC1412	* D3	Q602	E1	Q2019	C1	R155	* D2	R507	* E3	R602	E1	R716	C3	R831	* E2	R1014	E2	R1195	* B3	R1293	B3										

R2194	* B1	RB412	* C1	TG-285 1-889-420-11 *: B SIDE	C285	* A2	C065	* B2	IC201	* A1	R215	B2	R316	* A2	R081	* B1
R2195	* B1	RB413	* D1		C286	* A2	C066	* B1	IC202	B2	R216	B2	R317	A1	R082	* B2
R2197	* B1	RB414	* D1		C287	* A2	C067	* B1	IC203	B2	R217	B2	R318	* B2	R084	* B2
R2198	* B1	RB415	* D1		C288	* A2	C068	* B1	IC204	B2	R218	B2			R085	* B1
R2203	* B1	RB701	* D3		C289	* B2	C069	* B1	IC205	B2	R219	B2	R001	B2	R086	* B1
R2204	* B1	RB702	* D3		C290	A2	C075	* A3	IC206	B2	R220	B2	R002	B2	R087	* B1
R2205	* B1	RB703	* D3		C291	* A2	C076	* A3	IC207	B1	R221	B1	R003	B2	R088	* B1
R2206	* B1	RB704	D3		C298	* A1	C077	* A3	IC208	B1	R222	B1	R004	B2	R089	* B1
R2207	B1	RB705	D3		C299	* A1	C078	A3	IC209	* A1	R223	B1	R005	* B2	R091	* B1
R2208	B1	RB706	* D3		C300	* B2	C079	A3	IC210	A1	R224	B1	R006	* B2	R093	* B1
R2209	B1	RB707	* D3		C301	* B2	C080	A3	IC218	* B2	R225	B1	R007	* B2		
R2210	B1	RB708	D3		C302	* B2	C081	B2	IC219	A2	R226	B1	R008	* B2	RB201	A2
R2211	B1	RB709	D3		C303	B2	C082	* B1	IC220	B2	R227	B1	R009	* B2	RB202	A2
R2212	B1	RB710	* D3		C210	* A1	C304	* B2	IC221	* B2	R228	B1	R010	* B2		
R2213	B1	RB711	* D3		C211	A1	C305	A2	IC222	* A2	R229	A1	R011	* B2	X201	A1
R2214	* B1	RB712	D3		C212	A1	C307	B2	IC223	A2	R230	A1	R012	* B2	X202	A1
R2215	* B1	RB713	D3		C213	A1	C308	B2	IC224	* A2	R231	B1	R013	* B2		
R2216	* B1	RB714	D3		C214	A1	C309	B1	IC225	* B1	R232	B1	R014	* B2		
R2217	B1	RB715	D3		C215	* A1	C310	* B2	IC226	* B1	R233	B1	R015	* B3		
R2218	* B1	RB716	* D3		C216	* A1	C311	* B1	IC227	* B1	R234	B1	R016	* B2		
R2219	* B1	RB717	* D3		C217	A1	C312	B1	IC228	* B1	R235	B1	R017	* B3		
R2220	* B1	RB718	* D3		C218	B1					R236	B1	R018	* B3		
R2221	* B1	RB719	* D3		C219	A2	C001	B3	L201	B1	R237	B1	R019	* B3		
R2222	* B1	RB720	* D3		C220	A1	C002	B2	L202	* A1	R238	A1	R020	* B2		
R2223	* B1	RB721	* D3		C221	A1	C003	* B2	L203	* B1	R239	A1	R021	* B2		
R2224	* B1	RB722	* D3		C222	A1	C004	* B3	L204	B1	R240	A1	R022	* B2		
R2225	* B1	RB723	* D3		C223	A1	C005	* B2	D201	* A1	R241	A1	R023	* B3		
R2226	* B1	RB724	D3		C224	A1	C006	* B2	D202	* A1	R242	A1	R024	* B2		
R2227	* C1	RB801	* A1		C225	A1	C007	* B2	L002	B3	R243	* A1	R025	* B2		
R2228	* B1	RB802	* A1		C226	A2	C008	B2	L003	B2	R244	* A1	R026	* B2		
R2229	* B1	RB901	* E2		C227	A1	C009	B2	L004	* B2	R257	* A2	R027	* B3		
R2230	* B1	RB902	* E2		C228	A1	C010	B2	L005	* A3	R258	* A2	R028	* B3		
R2231	* B1	RB903	* E2		C229	A1	C011	B2	L006	* A3	R259	* B2	R029	* B3		
R2232	B1	RB904	* E2		C230	A1	C012	* B2	Q201	* A1	R260	* B2	R030	* A3		
R2233	C1	RB905	* E2		C231	A1	C013	* B2	Q202	* A1	R261	A2	R031	* A3		
R2234	* B1	RB906	* E2		C232	A1	C014	B3	E001	B3	R262	A2	R032	* B3		
R2235	* C1	RB907	* D2		C233	A1	C015	* B3	ET001	A2	R263	B2	R033	* B3		
R2236	* C1	RB908	* D2		C234	A1	C016	* B2	ET002	A1	R264	B2	R034	* B3		
R2237	* B1	RB909	* D2		C235	A1	C017	* B3	ET003	B1	R265	* A2	R035	* B3		
R2238	B1	RB910	* D2		C236	A2	C018	* B2	ET004	B3	R266	* A2	R036	* B3		
R2239	* B1	RB911	E2		C237	A1	C019	B3			R267	* A2	R037	* B3		
R2240	* B1	RB1101	E2		C238	A1	C020	B2	FB201	B1	R268	* A2	R038	* B3		
R2241	* C1	RB1102	E1		C239	A1	C021	B3	FB202	A1	R269	* A1	R039	* A2		
R2242	* B1	RB1103	B1		C240	A1	C022	B2	FB203	A2	R270	* A1	R040	* A2		
R2244	* B1	RB1104	* E2		C241	A1	C023	* B3	FB204	A2	R271	* A1	R041	* A2		
R2245	* B1	RB1105	* D1		C242	A1	C024	* B3	FB205	A1	R272	* A1	R042	* A2		
R2246	* C1	RB1201	* C3		C243	A1	C025	* A3	FB206	A1	R273	* A1	R043	* A2		
R2247	* C1	RB1501	C1		C244	A1	C026	* B3	FB207	A1	R274	* A1	R044	A2		
R2248	* C1	RB1502	* C2		C245	A1	C027	* A2	FB208	A1	R275	* A1	R045	* A2		
R2249	* B1	RB1503	C2		C246	A1	C028	* A3	FB209	* A1	R276	* A1	R046	* A2		
R2250	C1	RB1602	* C2		C247	A1	C029	* B3	FB210	* A1	R277	* A1	R047	* A2		
R2251	C1	RB1603	* C2		C248	A1	C030	* B3	FB211	* A1	R278	* B2	R048	* B3		
R2252	* C1				C249	A1	C031	* B3	FB212	A1	R279	* B2	R049	* B2		
R2253	* C1	RV1901	* B2		C250	A1	C032	* A2	FB213	A1	R280	* B2	R050	* B2		
R2254	C1				C251	A1	C033	* A2	FB214	* A1	R281	* B2	R052	* A3		
R2255	C1	S3	* B2		C252	A1	C034	* A2	FB215	* B1	R282	* B2	R053	* A3		
R2256	* C1	S301	* E1		C253	A1	C035	A2	FB216	* B1	R283	B2	R054	* A3		
R2257	* C1	S302	* D1		C254	A1	C036	* A2	FB217	* B2	R284	A1	R055	* A3		
R2258	* C1	S601	* A3		C255	A1	C037	* A2	FB218	* B2	R285	A1	R056	* A3		
R2259	* C1	S901	* E2		C256	A1	C038	A2	FB219	* B2	R286	A1	R057	* A3		
R2260	* B1				C257	A1	C039	* A2	FB220	* B2	R287	A1	R058	* A3		
R2261	* B1	THP1	B3		C258	A1	C040	A2	FB221	* B2	R288	A1	R059	* A3		
R2262	* B1	THP101	D3		C259	A2	C041	A2	FB222	* B2	R289	A1	R060	* A3		
R2263	* B1	THP102	* D2		C260	A2	C042	A2	FB223	* B2	R290	A1	R061	* A3		
		THP103	* D2		C261	A1	C043	A2	FB224	A2	R291	A1	R062	* A3		
RB301	D1				C262	A1	C044	B2	FB225	A1	R292	* B2	R063	* A3		
RB302	D1	TP11	D2		C263	A1	C045	* A3	FB226	A2	R293	* B2	R064	* A3		
RB303	D1	TP12	E1		C264	A1	C046	A3			R294	* B2	R065	* A3		
RB304	D1	TP301	* E1		C265	* A2	C047	A3	IC001	* B2	R295	* B2	R066	* A3		
RB305	* D1	TP1301	* B3		C267	* A2	C048	* A3	IC002	* B1	R296	* B2	R067	* B2		
RB306	* D1				C269	* A2	C049	A3	IC003	* B1	R297	* B2	R068	* B2		
RB312	* D1	X1001	E2		C271	* A2	C050	A3	IC009	* B2	R298	* B2	R069	* B2		
RB313	* D1				C273	* A2	C051	* A3	IC010	* B2	R299	* B2	R070	* B2		
RB314	* D1				C275	* A2	C052	* A3	IC011	* B3	R300	* B2	R071	* B2		
RB315	* D1				C276	* A2	C053	* B2	IC012	* B3	R302	A1	R072	* B2		
RB316	* D1				C277	* A2	C054	* B2	IC013	* A3	R303	A1	R073	* B2		
RB317	* E1				C278	* A2	C055	* B2	IC014	* A3	R304	* A1	R074	* B1		
RB318	* E1				C279	* B2	C056	* B2	IC015	* A3	R310	* A2	R075	* B2		
RB319	D1				C280	* B2	C057	* B1	IC016	* A2	R311	* A2	R076	* B2		
RB401	D1				C281	A2	C058	* B1	IC017	A2	R312	* A2	R077	* B2		
RB402	D1				C282	A2	C059	* B2	IC018	* A3	R313	* A2	R078	* B2		
RB403	D1				C283	B2	C060	* B1	IC019	B2	R314	* A2	R079	* B1		
RB404	D1				C284	B2	C064	* B2	IC020	* A2	R315	* A2	R080	* B1		

HSC300RF (UC)
HSC300RF (CED)
HSC300RF (E)
HSC300RF (J)
HSC100RF (UC)
HSC100RF (CED)
HSC100RF (E)
HSC100RF (J)
HSC300R (UC)
HSC300R (CED)
HSC300R (J)
HSC100R (UC)
HSC100R (CED)
HSC100R (J) J, E
9-878-493-01

Sony Corporation

Printed in Japan
2013. 10 08
© 2013