SONY

PROFESSIONAL DISC CAMCORDER

PDW-F330
PDW-F350

XDCAM HD Professional Disc System

Professional Disc

MPEG HD

DVCAM™

MEMORY STICK™

CINEALTA

SERVICE MANUAL

Volume 2 1st Edition

⚠警告

このマニュアルは，サービス専用です。
お客様が，このマニュアルに記載された設置や保守，点検，修理などを行うと感電や火災，人身事故につながることがあります。
危険をさけるため，サービストレーニングを受けた技術者のみご使用ください。

⚠ WARNING

This manual is intended for qualified service personnel only.
To reduce the risk of electric shock, fire or injury, do not perform any servicing other than that contained in the operating instructions unless you are qualified to do so. Refer all servicing to qualified service personnel.

⚠ WARNUNG

Die Anleitung ist nur für qualifiziertes Fachpersonal bestimmt.
Alle Wartungsarbeiten dürfen nur von qualifiziertem Fachpersonal ausgeführt werden. Um die Gefahr eines elektrischen Schlages, Feuergefahr und Verletzungen zu vermeiden, sind bei Wartungsarbeiten strikt die Angaben in der Anleitung zu befolgen. Andere als die angegeben Wartungsarbeiten dürfen nur von Personen ausgeführt werden, die eine spezielle Befähigung dazu besitzen.

⚠ AVERTISSEMENT

Ce manual est destiné uniquement aux personnes compétentes en charge de l’entretien. Afin de réduire les risques de décharge électrique, d’incendie ou de blessure n’effectuer que les réparations indiquées dans le mode d’emploi à moins d’être qualifié pour en effectuer d’autres. Pour toute réparation faire appel à une personne compétente uniquement.

目次/Table of Contents

このマニュアルについて

本書の目的 ..... 5 (J)
関連マニュアル ..... 5 (J)

Manual Structure

Purpose of this manual ..... 5 (E)
Related manuals ..... 5 (E)

1. Spare Parts

1-1. 補修部品注意事項 1-1
1-1. Notes on Repair Parts 1-1
1-2. Exploded Views 1-2
1-3. Electrical Parts List 1-28
1-4. Supplied Accessories 1-117
1-5. Optional Fixtures 1-117

2. Semiconductor Pin Assignments

3. Block Diagrams

Overall (Camera) 3-2
Overall (VDR) 3-3
Overall (Drive) 3-4
AA-112 3-5
MA-136 3-5
SW-1246 3-5
CNB-18 3-6
PS-708 3-6
PSW-85 3-6
DCP-37 3-7
DCP-37A 3-7
MS-71 3-8
LED-428 3-9
RM-203 3-9
SE-743 3-9
CN-2829 3-11
DIF-167 3-11
IR-36 3-11
VR-312 3-11
DR-550G 3-12
HN-300G 3-12
SE-709 3-12
SE-800 3-12
SW-1124G 3-12
SW-1125G 3-12
DU-398 3-13
DVP-29 3-13
AU-307 3-14
AU-307C 3-14
FP-144 3-14
FP-144A 3-14
HP-124 3-14
JK-73 3-14
RX-96 3-14
DET-43G 3-15
DU-318 3-15
ENC-100 3-15
GCN-17 3-15
KSW-51 3-15
KY-573 3-15
PA-328 3-16
PA-329 3-16
PA-330 3-16
TG-249 3-16
IO-228 3-17
LGT-12 3-17
PD-115 3-17
SW-1249 3-17
TC-110 3-17
VF-87 3-17
VIO-36 3-17
VIO-36A 3-17
RE-236 3-18
CN-2624 3-19
SY-322 3-19
TX-105 3-20

4. Schematic Diagrams

AA-112 4-3
AU-307 4-4
AU-307C 4-4
CN-2624 4-4
CN-2829 4-4
DU-318 4-4
CNB-18 4-5
DCP-37 4-6
DCP-37A 4-24
DIF-167 4-42
DR-550G 4-43
DVP-29 4-50
DU-398 4-87
ENC-100 4-87
FP-144 4-89
FP-144A 4-99
GCN-17 4-111
KSW-51 4-111
HN-300G 4-112
HP-124 4-113
IO-228 4-113
IR-36 4-113
JK-73 4-113
KY-573 4-114
LED-428 4-114
LGT-12 4-114
MA-136 4-115
MB-1028 4-116
PA-328 4-118
PA-329 4-120
PA-330 4-122
MS-71 4-124
PS-708 4-124
PSW-85 4-124
PD-115 4-125
RE-236 4-127
RM-203 4-133
RX-96 4-133
SE-709 4-133
SE-743 4-133
SE-800 4-134
SW-1124 4-134
SW-1125G 4-134
SW-1246 4-135
SW-1249 4-135
TC-110 4-135
SY-322 4-136
VF-87 4-145
TG-249 4-146
VIO-36 4-150
VIO-36A 4-150
VR-312 4-150
DET-43G 4-151
Frame Wiring 4-151

5. Board Layouts

AA-112 5-2
AU-307 5-2
CN-2624 5-2
CN-2829 5-2
CNB-18 5-2
DCP-37A 5-3
DET-43G 5-5
DIF-167 5-5
DR-550G 5-6
DU-318 5-7
DU-398 5-7
DVP-29 5-7
ENC-100 5-7
FP-144A 5-9
GCN-17 5-10
HP-124 5-10
IO-228 5-10
HN-300G 5-11
JK-73 5-12
KSW-51 5-12
KY-573 5-12
LED-428 5-12
LGT-12 5-12
MA-136 5-12
MB-1028 5-13
MS-71 5-13
PD-115 5-14
PS-708 5-14
PSW-85 5-14
RE-236 5-15
RM-203 5-16
RX-96 5-16
SE-709 5-16
SE-743 5-16
SE-800 5-16
SW-1124 5-16
SW-1125G 5-16
SW-1246 5-16
SW-1249 5-16
TC-110 5-16
SY-322 5-17
TG-249 5-18
VF-87 5-18
VIO-36A 5-18
VR-312 5-18

このマニュアルについて

本書の目的

本書はプロフェッショナルディスクカムコーダーPDW-F330/F350のサービスマニュアルVolume 2です。

本機のサービスマニュアル（Volume 2）は，システム／サービスエンジニアの方々にご使用いただくことを想定し，保守に関する情報と部品レベルでのサービスを前提とした情報（部品表，ブロック図，回路図，マウント図等）を記載しています。

関連マニュアル

本機には，この「サービスマニュアルVolume 2」のほかに，下記のマニュアルが用意されています。

- **取扱説明書（本機に付属）**
  本機を実際に運用および操作するのに必要なマニュアルです。設置時にも必要です。

- **サービスマニュアル Volume 1（別途用意）**
  Volume 1には，保守に関する情報，部品交換，調整要項を記載しています。

- **DXF-801 サービスマニュアル（別途用意）**
  本機（PDW-F330）に付属のビューファインダーDXF-801のサービスマニュアルです。

- **DXF-20W サービスマニュアル（別途用意）**
  本機（PDW-F350）に付属のビューファインダー DXF-20W のサービスマニュアルです。

- **“Semiconductor Pin Assignments” CD-ROM 版（別途用意）**
  この“Semiconductor Pin Assignments” CD-ROM版は，放送用および業務用の機器に使用されている半導体を検索することができます。
  本書には，使用されている半導体一覧とそのID番号を記載していますので，このCD-ROM版と合わせて使用してください。
  部品番号：9-968-546-XX

Manual Structure

Purpose of this manual

This manual is the service manual volume 2 of the Professional Disc Camcorder PDW-F330/F350.

This service manual (volume 2) is intended for use by trained system and service engineers, and provides the information of maintenance and detailed service (parts list, block diagrams, schematic diagrams, and board layouts etc.).

Related manuals

Besides this “service manual volume 2”, the following manuals are available.

- **Operating Instructions (Supplied with this unit.)**
  This manual is necessary for application and operation (and installation) of this unit.

- **Service Manual Volume 1 (Available on request)**
  The volume 1 manual describes maintenance information, parts replacement, and adjustment procedure.

- **DXF-801, 801CE Service Manual (Available on request)**
  This manual the service manual for the view finder supplied with the camcorder PDW-F330.

- **DXF-20W Service Manual (Available on request)**
  This is the service manual for the view finder supplied with the camcorder PDW-F350.

- **“Semiconductor Pin Assignments” CD-ROM (Available on request)**
  This “Semiconductor Pin Assignments” CD-ROM allows you to search for semiconductors used in Broadcast and Professional equipment.
  This manual contains a complete list of semiconductors and their ID Nos., and thus should be used together with the CD-ROM.
  Part number: 9-968-546-XX

Section 1
Spare Parts

1-1. Notes on Repair Parts

1. Safety Related Components Warning

WARNING

Components marked ⚠ are critical to safe operation. Therefore, specified parts should be used in the case of replacement.

2. Standardization of Parts

Some repair parts supplied by Sony differ from those used for the unit. These are because of parts commonality and improvement.
Parts list has the present standardized repair parts.

3. Stock of Parts

Parts marked with "o" at SP (Supply Code) column of the spare parts list may not be stocked. Therefore, the delivery date will be delayed.

4. Harness

Harnesses with no part number are not registered as spare parts.

1-1. 補修部品注意事項

1. 安全重要部品

⚠警告

⚠印のついた部品は安全性を維持するために重要な部品です。したがって，交換する時は必ず指定の部品を使ってください。

2. 部品の共通化

ソニーから供給する補修用部品は，セットに使われているものと異なることがあります。
これは部品の共通化，改良等によるものです。
部品表には現時点での共通化された補修用部品が記載されています。

3. 部品の在庫

部品表のSP (Supply code) 欄に"o"で示される部品は在庫していないことがあり，納期が長くなることがあります。

4. ハーネス

部品番号が記載されていないハーネスは，サービス部品として登録されていません。

1-2. Exploded Views

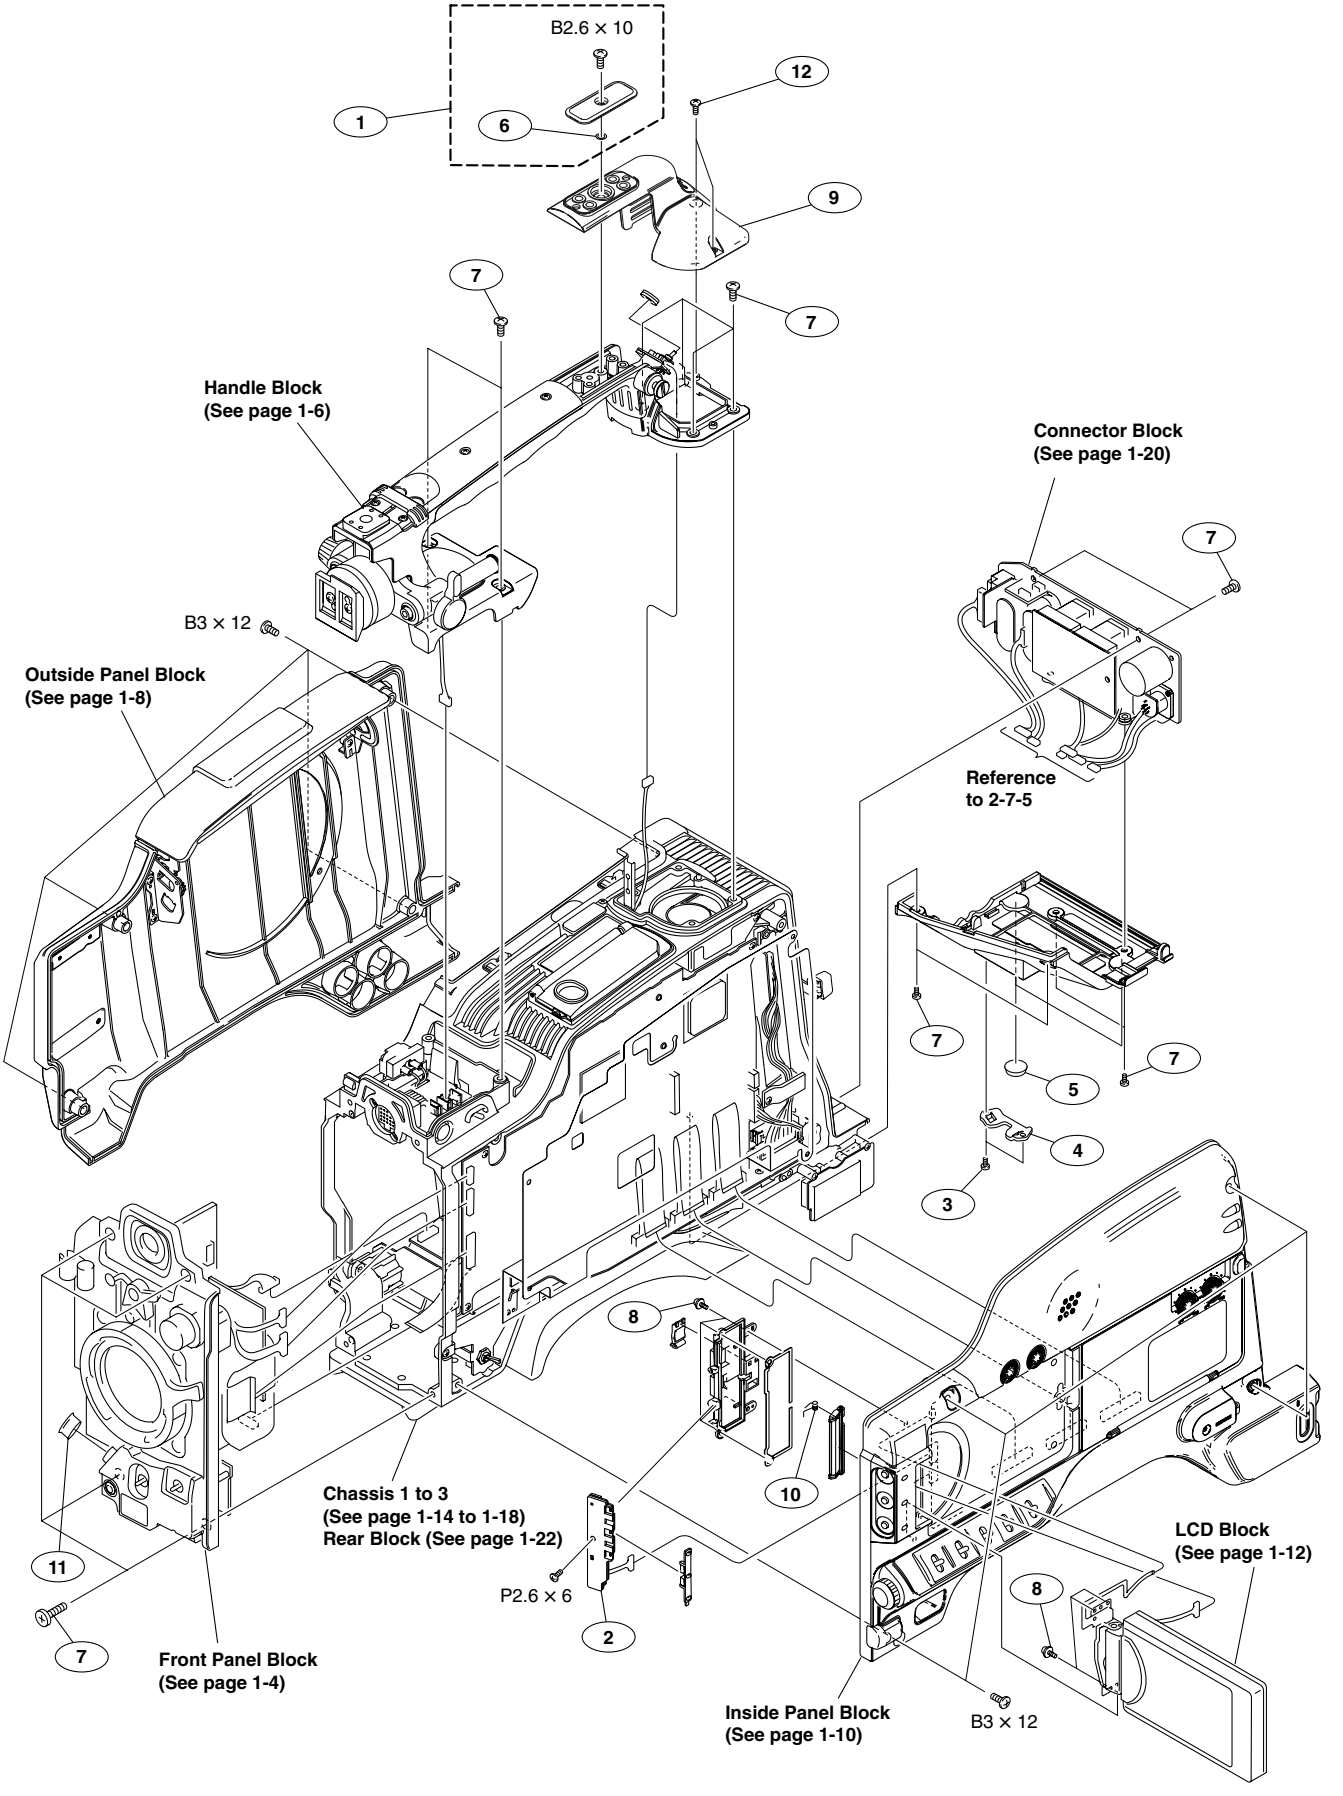

No.	Part No.	SP	Description
1	A-1106-989-A	s	COVER ASSY, SHOE
2	A-1164-279-A	s	MOUNTED CIRCUIT BOARD, KSW-51
3	3-364-941-01	s	SCREW (+B) (2.6X5), NYLOK
4	3-626-781-03	s	STOPPER
5	3-723-097-01	o	FOOT, RUBBER
6	3-742-004-01	s	RING, NYLON
7	3-742-074-13	s	SCREW, (+B 3X8)
8	3-855-938-01	s	SCREW
9	3-868-641-01	s	COVER, TALLY
10	3-869-456-01	s	SPRING, TORSION
11	3-991-431-01	s	CAP, DROP PROTECTION
12	4-654-273-02	s	ACE (M2), LOCK
	7-621-775-50	s	SCREW, +B 2.6X10
	7-682-550-09	s	SCREW, +B 3X12
	7-685-133-11	s	SCREW, +P 2.6X6 TYPE2

Front Panel Block

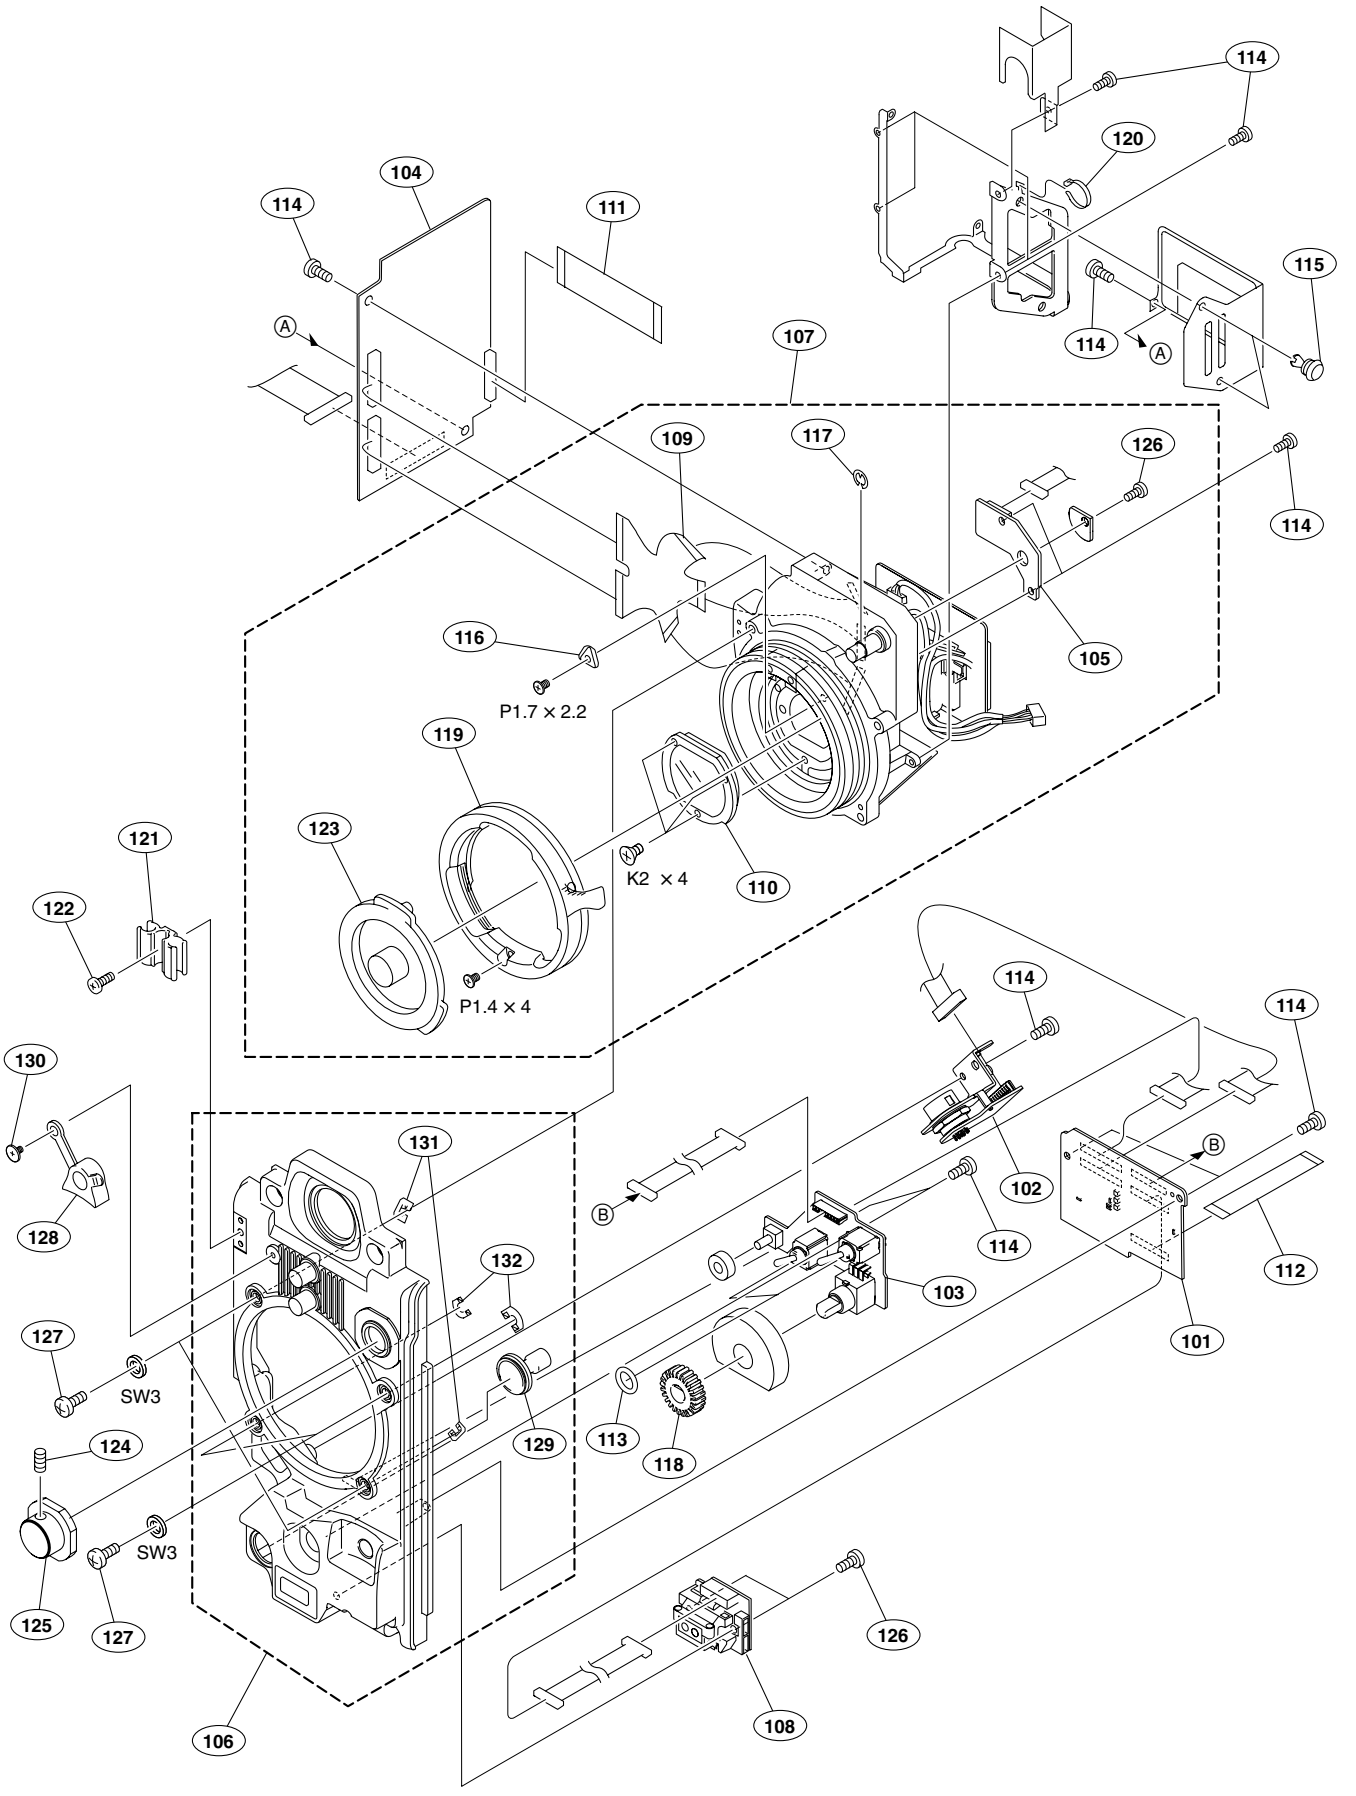

No.	Part No.	SP	Description
101	A-1164-278-A	s	MOUNTED CIRCUIT BOARD, DIF-167
102	A-1164-301-A	s	MOUNTED CIRCUIT BOARD, CN-2829
103	A-1164-303-A	s	MOUNTED CIRCUIT BOARD, VR-312
104	A-1164-306-A	s	MOUNTED CIRCUIT BOARD, TG-249
105	A-1164-311-A	s	MOUNTED CIRCUIT BOARD, SE-743
106	A-1174-608-A	s	PANEL SUB ASSY, FRONT (for PDW-F330)
	A-1174-623-A	s	PANEL SUB ASSY, FRONT (for PDW-F350)
107	A-1188-412-A	s	CCD UNIT
108	1-479-727-11	s	SENSOR, DISTANCE MEASURING
109	1-724-304-21	s	FPC (CN-2594)
110	1-479-899-11	s	FILTER UNIT, OPTICAL
111	1-831-151-11	s	CABLE, FLEXIBLE FLAT (45 CORE)
112	1-832-097-11	s	CABLE, FLEXIBLE FLAT (30 CORE)
113	3-312-823-01	s	PACKING, KNOB
114	3-364-941-01	s	SCREW (+B) (2.6X5), NYLOK
115	3-531-576-01	s	RIVET
116	3-612-608-01	o	FIXING PLATE, FILTER
117	3-618-078-03	s	RING, RETAINING, CE TYPE
118	3-624-135-01	s	KNOB, VR (AUDIO)
119	3-626-792-01	o	RING, MOUNT (D)
120	3-671-893-01	s	CLAMP (LOW TYPE)
121	3-679-659-05	s	CLAMP, CABLE
122	3-694-181-03	s	TYPE1, AROCK PRECISION +P 2.6X5
123	3-699-144-02	s	CAP, MOUNT
124	3-701-505-01	s	SET SCREW, DOUBLE POINT 3X3
125	3-710-054-01	s	KNOB, FILTER
126	3-729-076-11	s	SCREW (+B) (2X4)
127	3-742-074-13	s	SCREW (+B 3X8)
128	3-796-982-02	s	HOLDER LENS MOUNT
129	3-868-649-02	s	BUTTON, REC START
130	3-965-077-02	s	SCREW, SPECIAL (M2)
131	3-991-832-01	s	SHIELD FINGER A
132	3-991-833-01	s	SHIELD FINGER B
	7-623-208-22	s	SW 3, TYPE 2
	7-627-452-28	s	SCREW, PRECISION +K 2X4
	7-627-551-78	s	SCREW, PRECISION +P 1.4X4
	7-627-552-88	s	SCREW, PRECISION +P 1.7X2.2

Handle Block

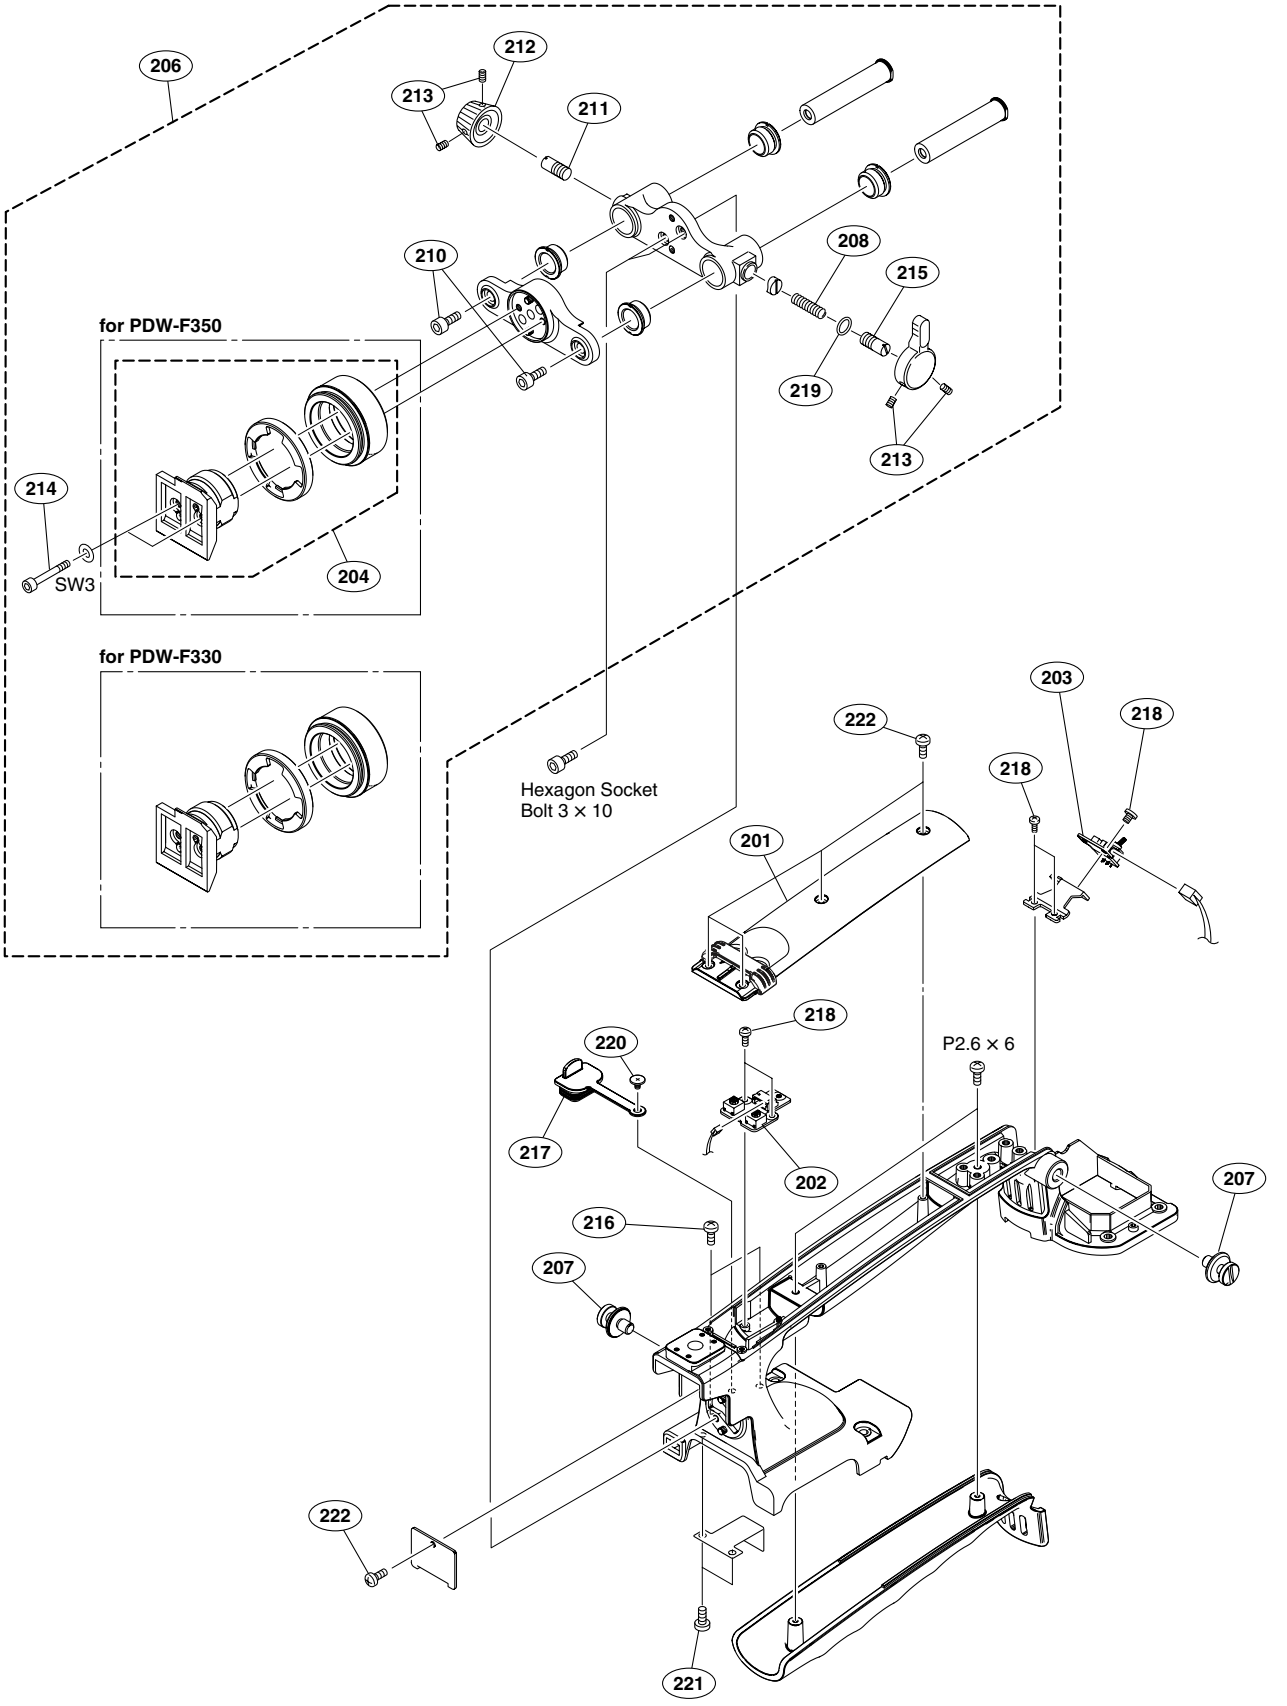

No.	Part No.	SP	Description
201	A-1106-990-A	s	COVER ASSY, TOP
202	A-1164-298-A	s	MOUNTED CIRCUIT BOARD, SW-1249
203	A-1164-299-A	s	MOUNTED CIRCUIT BOARD, LED-428
204	A-8278-412-H	s	SHOE ASSY, VF (for PDW-F350)
206	A-8279-832-B	s	SLIDE ASSY, VF (5) (for PDW-F330)
	A-8286-289-A	s	SLIDE ASSY, VF (for PDW-F350)
207	X-3710-037-1	s	SUSPENSION ASSY (C)
208	3-612-822-01	s	SPRING,COMPRESSION
209	3-627-853-06	s	SHOE, SLIDE (for PDW-F350)
210	3-657-705-91	s	BOLT (M4X8), HEXAGON HOLE
211	3-690-660-02	s	LOCK, SCREW
212	3-690-674-02	s	KNOB, LOCK
213	3-701-507-01	s	SET SCREW, DOUBLE POINT,(M3X5)
214	3-711-765-01	s	BOLT (M3), HEXAGON SOCKET
215	3-711-794-12	s	PIN, STOPPER
216	3-742-074-13	s	SCREW, (+B 3X8)
217	3-796-978-01	s	LIGHT CONNECTOR COVER
218	3-855-938-01	s	SCREW
219	3-895-622-01	s	RING (DIA. 5), O
220	3-965-077-02	s	SCREW, SPECIAL (M2)
221	3-968-729-81	s	SCREW (M2), LOCK ACE, P2
222	4-654-273-02	s	ACE (M2), LOCK
	7-623-208-22	s	SW3, TYPE2
	7-683-405-04	s	BOLT, HEXAGON SOCKET 3X10
	7-685-133-11	s	SCREW, +P 2.6X6 TYPE2

Outside Panel Block

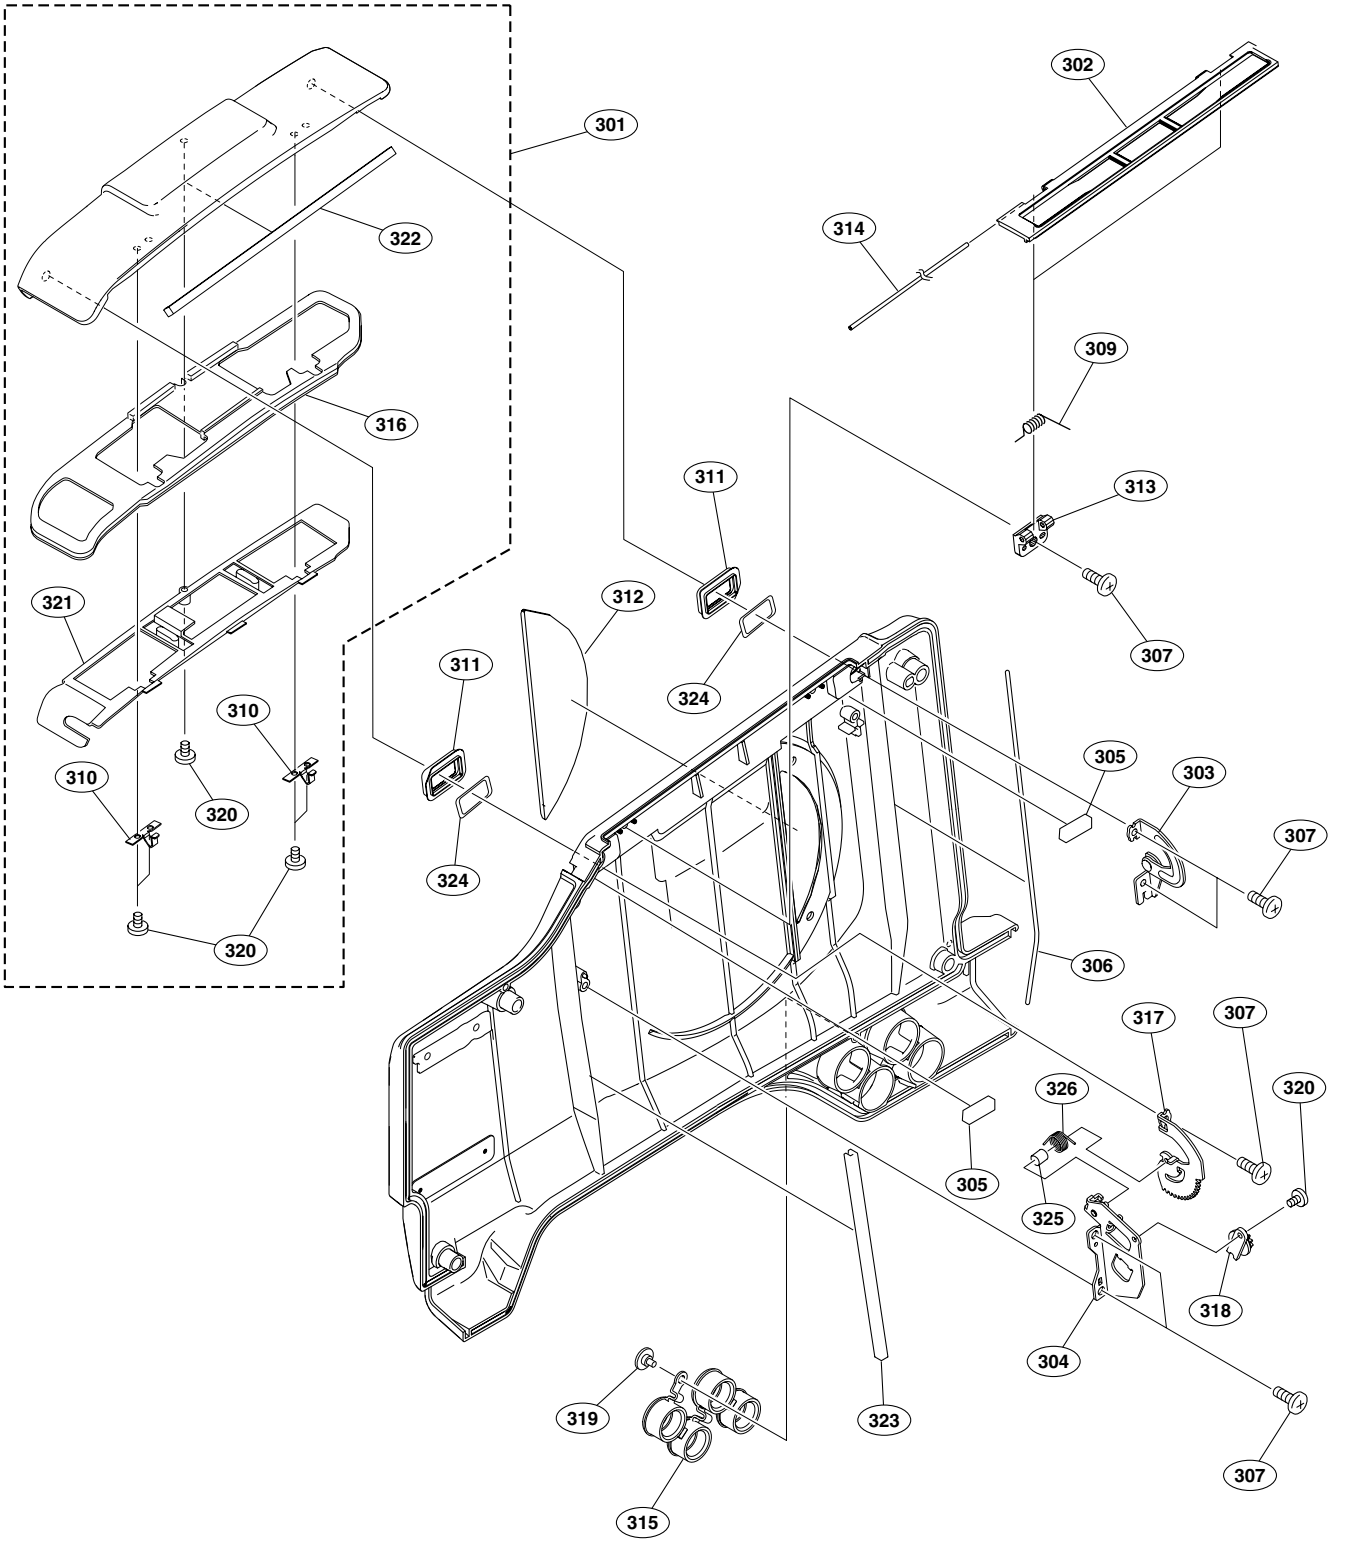

No.	Part No.	SP	Description
301	A-1174-598-A	s	LID ASSY CARTRIDGE (for PDW-F330)
	A-1174-625-A	s	LID ASSY, CARTRIDGE (for PDW-F350)
302	X-3608-690-3	s	ASSY, SHUTTER INNER
303	X-3698-568-3	s	ARM (L) ASSY, LID
304	X-3698-570-3	s	HOLDER (R) ASSY, ARM, LID
305	3-323-259-01	s	SPACER (B)
306	3-603-753-03	s	DUST PROTECT (2)
307	3-364-941-12	s	SCREW (+B) (2.6X5), NYLOK
309	3-797-003-01	s	SPRING 02, TORSION
310	3-797-004-03	s	HOLDER, OUT LID
311	3-797-005-03	s	PROTECTION, ARM LID
312	3-797-052-01	s	WINDOW, OUTSIDE
313	3-797-058-01	s	HOLDER, SHUTTER, INNER
314	3-797-059-01	s	SHAFT, SHUTTER, INNER
315	3-808-879-04	s	COVER BNC
316	3-825-462-02	s	PROTECTION, OUTER LID
317	3-868-613-03	s	(R) ARM, LID
318	3-953-235-11	s	DAMPER, OIL
319	3-965-077-02	s	SCREW, SPECIAL (M2)
320	3-968-729-81	s	SCREW (M2), LOCK ACE, P2
321	3-991-343-01	s	HOLDER, DUST PROTECTION, OUT LID
322	3-991-426-01	s	ABSORBENT, ACOUSTIC
323	3-991-693-01	s	SHIELD RUBER
324	3-991-719-02	s	SHEET, ADHENSIVE
325	3-991-830-02	s	COLLAR(2)
326	3-991-834-01	s	(OPEN) SPRING TORSION

Inside Panel Block

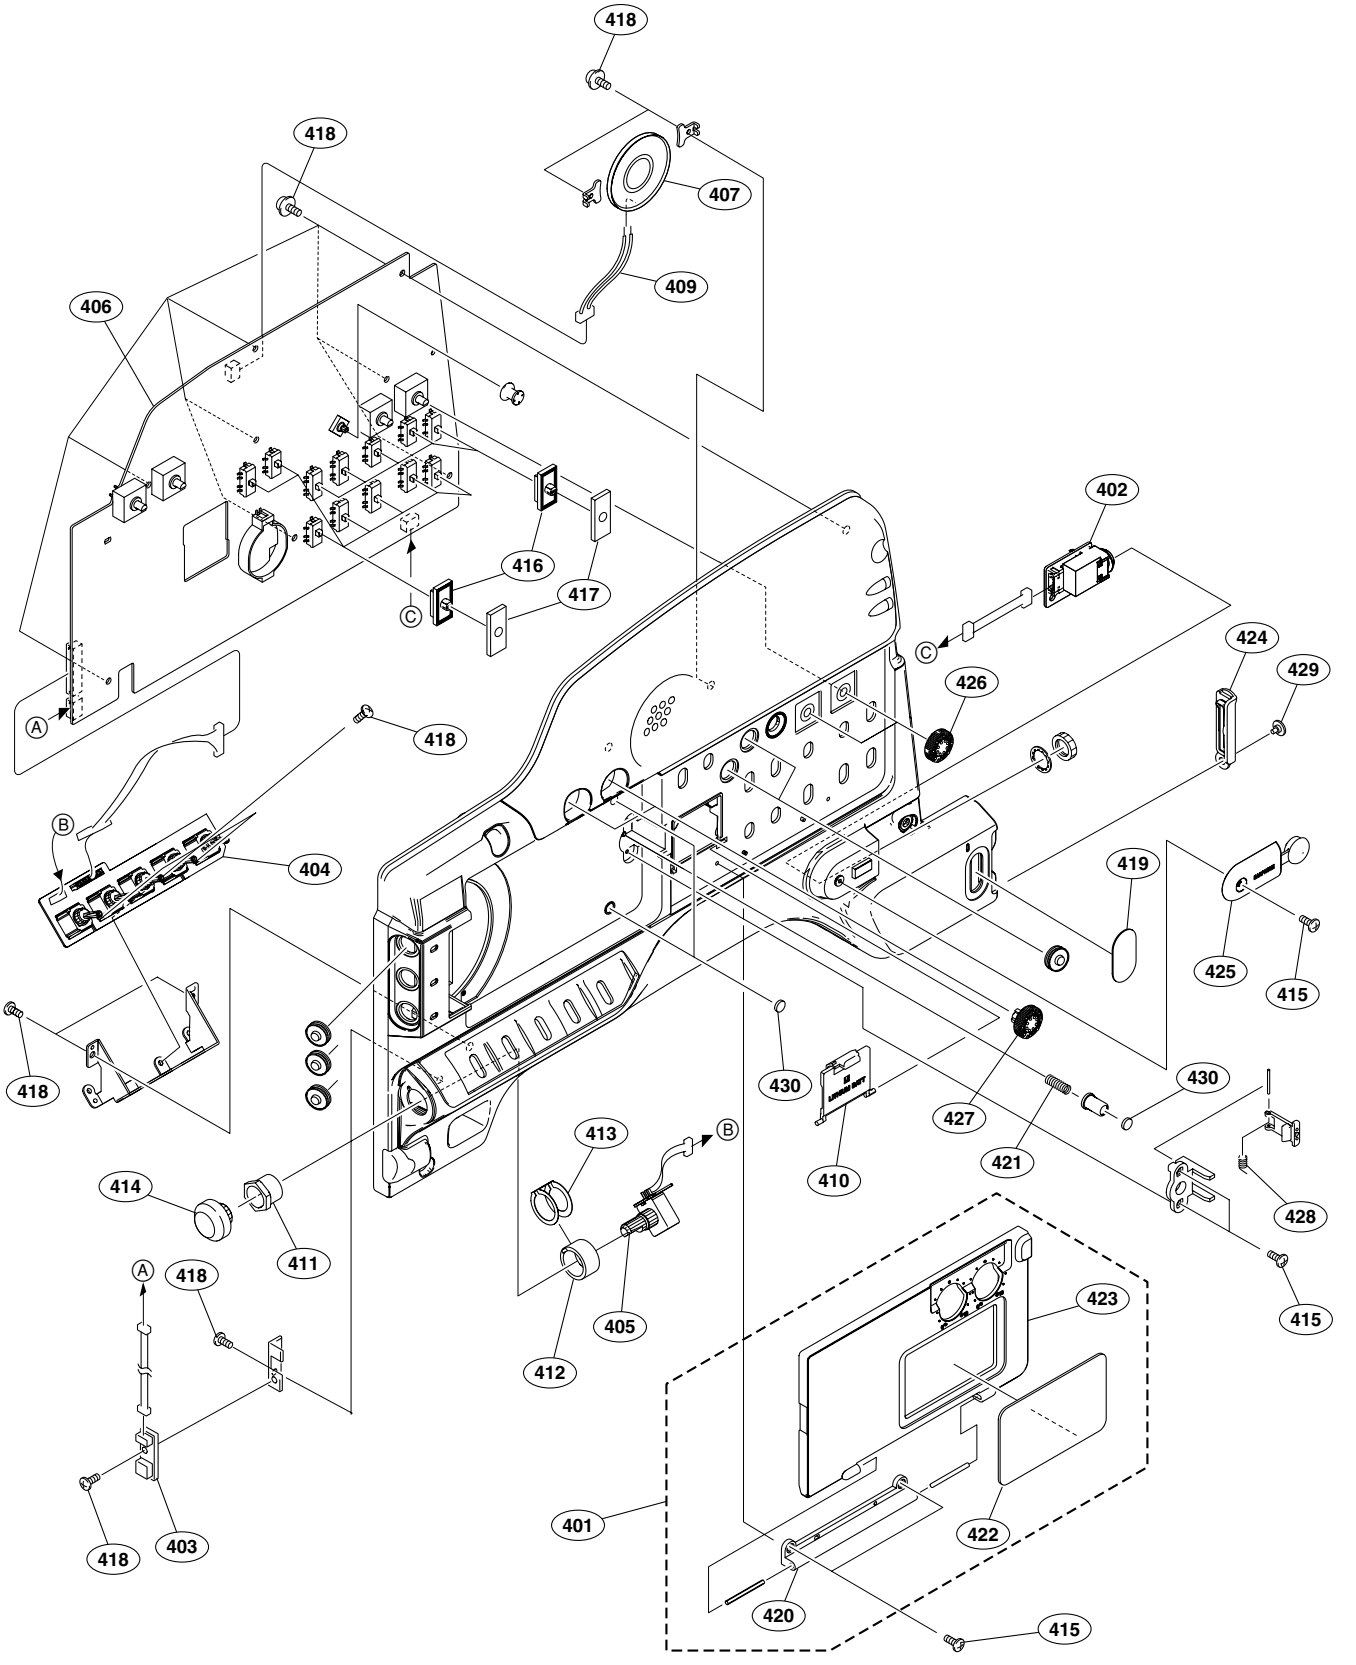

No.	Part No.	SP	Description
401	A-1106-979-A	s	DOOR ASSY, SWITCH (for PDW-F350)
	A-1173-680-A	s	DOOR ASSY, SWITCH (for PDW-F330)
402	A-1164-285-A	s	MOUNTED CIRCUIT BOARD, HP-124
403	A-1164-289-A	s	MOUNTED CIRCUIT BOARD, DU-318
404	A-1164-297-A	s	MOUNTED CIRCUIT BOARD, GCN-17
405	A-1164-302-A	s	MOUNTED CIRCUIT BOARD, ENC-100
406	A-1169-369-A	s	MOUNTED CIRCUIT BOARD, FP-144 (for PDW-F350)
	A-1169-400-A	s	MOUNTED CIRCUIT BOARD, FP-144A (for PDW-F330)
407	1-503-293-12	s	SPEAKER
409	1-960-882-13	s	HARNESS, SUB (SPEAKER)
410	3-604-373-03	o	COVER, BATTERY
411	3-629-446-04	s	SLEEVE (ENC2)
412	3-629-447-03	o	SLEEVE (ENC1)
413	3-647-917-02	s	PLATE, EARTH
414	3-692-111-02	s	KNOB, RE
415	3-719-381-02	s	SCREW (M2X4)
416	3-796-995-01	s	DROP PROTECTION (SW)
417	3-796-996-02	s	KNOB (A), SW
418	3-855-938-01	s	SCREW
419	3-868-980-02	s	WINDOW, MS
420	3-868-981-05	s	HINGE, DOOR, SW (for PDW-F330)
	3-868-981-14	s	HINGE, DOOR, SW (for PDW-F350)
421	3-868-983-01	s	SPRING, COMPRESSION
422	3-868-985-01	s	WINDOW, DOOR SW
423	3-868-987-03	s	DOOR, SW (for PDW-F330)
	3-868-987-12	s	DOOR, SW (for PDW-F350)
424	3-868-988-03	s	COVER, MS
425	3-868-990-02	s	COVER EARPHONE JACK
426	3-868-993-02	s	(S) KNOB VR
427	3-868-994-03	s	(L) KNOB VR
428	3-869-457-01	s	SPRING TORSION
429	3-965-077-02	s	SCREW, SPECIAL (M2)
430	3-969-387-01	s	FOOT, RUBBER

LCD Block

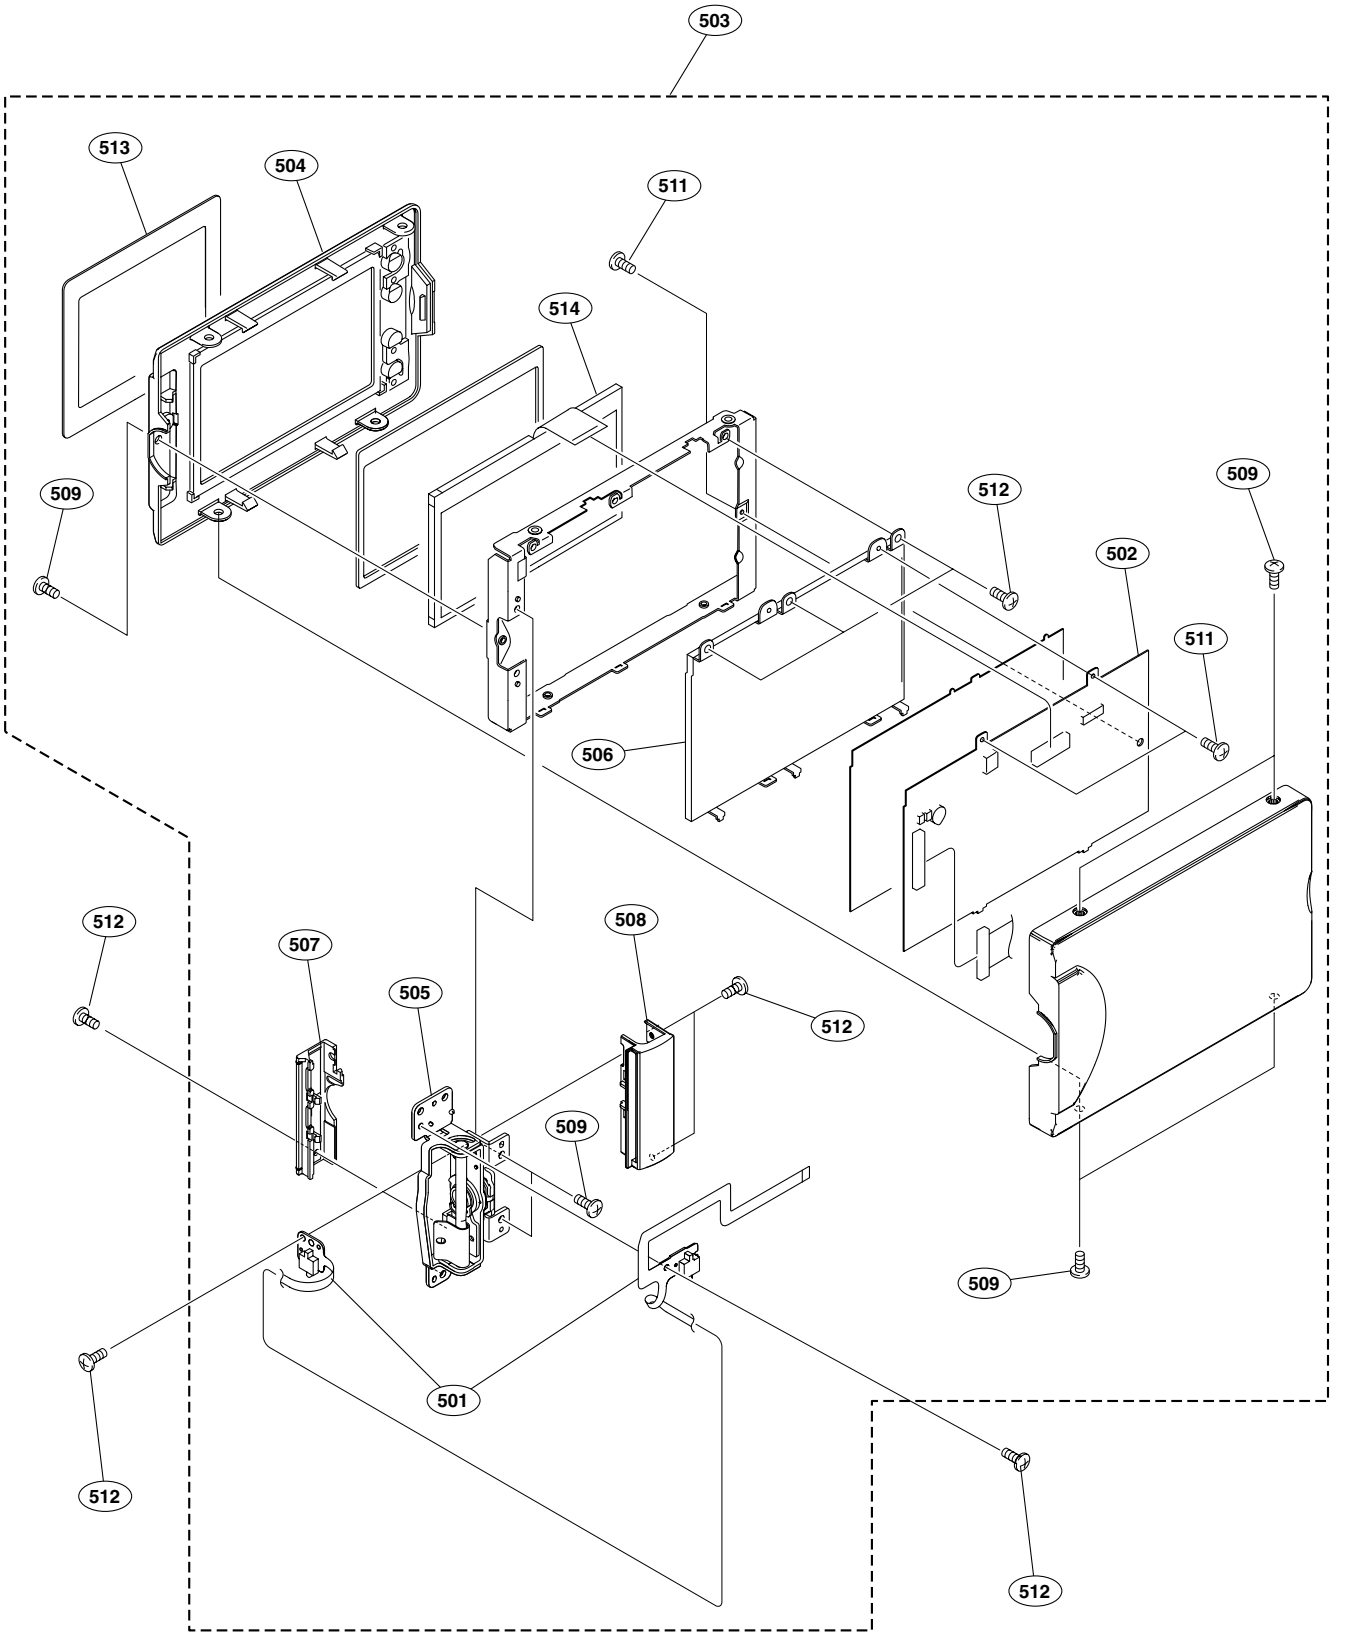
503
513
504
511
514
509
512
502
509
511
506
512
507
505
508
512
509
509
501
512
512

No.	Part No.	SP	Description
501	A-1156-237-A	s	MOUNTED CIRCUIT BOARD, DET-43G
502	A-1164-282-A	s	MOUNTED CIRCUIT BOARD, PD-115
503	A-1197-974-A	s	LCD ASSY (PR) (for PDW-F350)
	A-1197-975-A	s	LCD ASSY (PR) (for PDW-F330)
504	X-3704-824-3	s	SUB ASSY BEZEL LCD (for PDW-F330)
	X-3704-825-2	s	SUB ASSY BEZEL LCD (for PDW-F350)
505	X-3950-938-4	s	HINGE ASSY
506	1-478-568-22	s	BLOCK, LIGHT GUIDE PLATE (3.5)
507	3-060-694-11	s	COVER (REAR), HINGE
508	3-063-693-01	s	COVER (FRONT), HINGE (for PDW-F350)
	3-991-265-02	s	(FRONT)COVER HINGI (for PDW-F330)
509	3-719-381-02	s	SCREW (M2X4)
511	3-968-729-81	s	SCREW (M2), LOCK ACE, P2
512	3-989-735-11	s	SCREW (M1.7), LOCK ACE, P2
513	3-991-272-01	s	WINDOW LCD
514	8-753-209-06	s	ACX530AK-J

Chassis-1

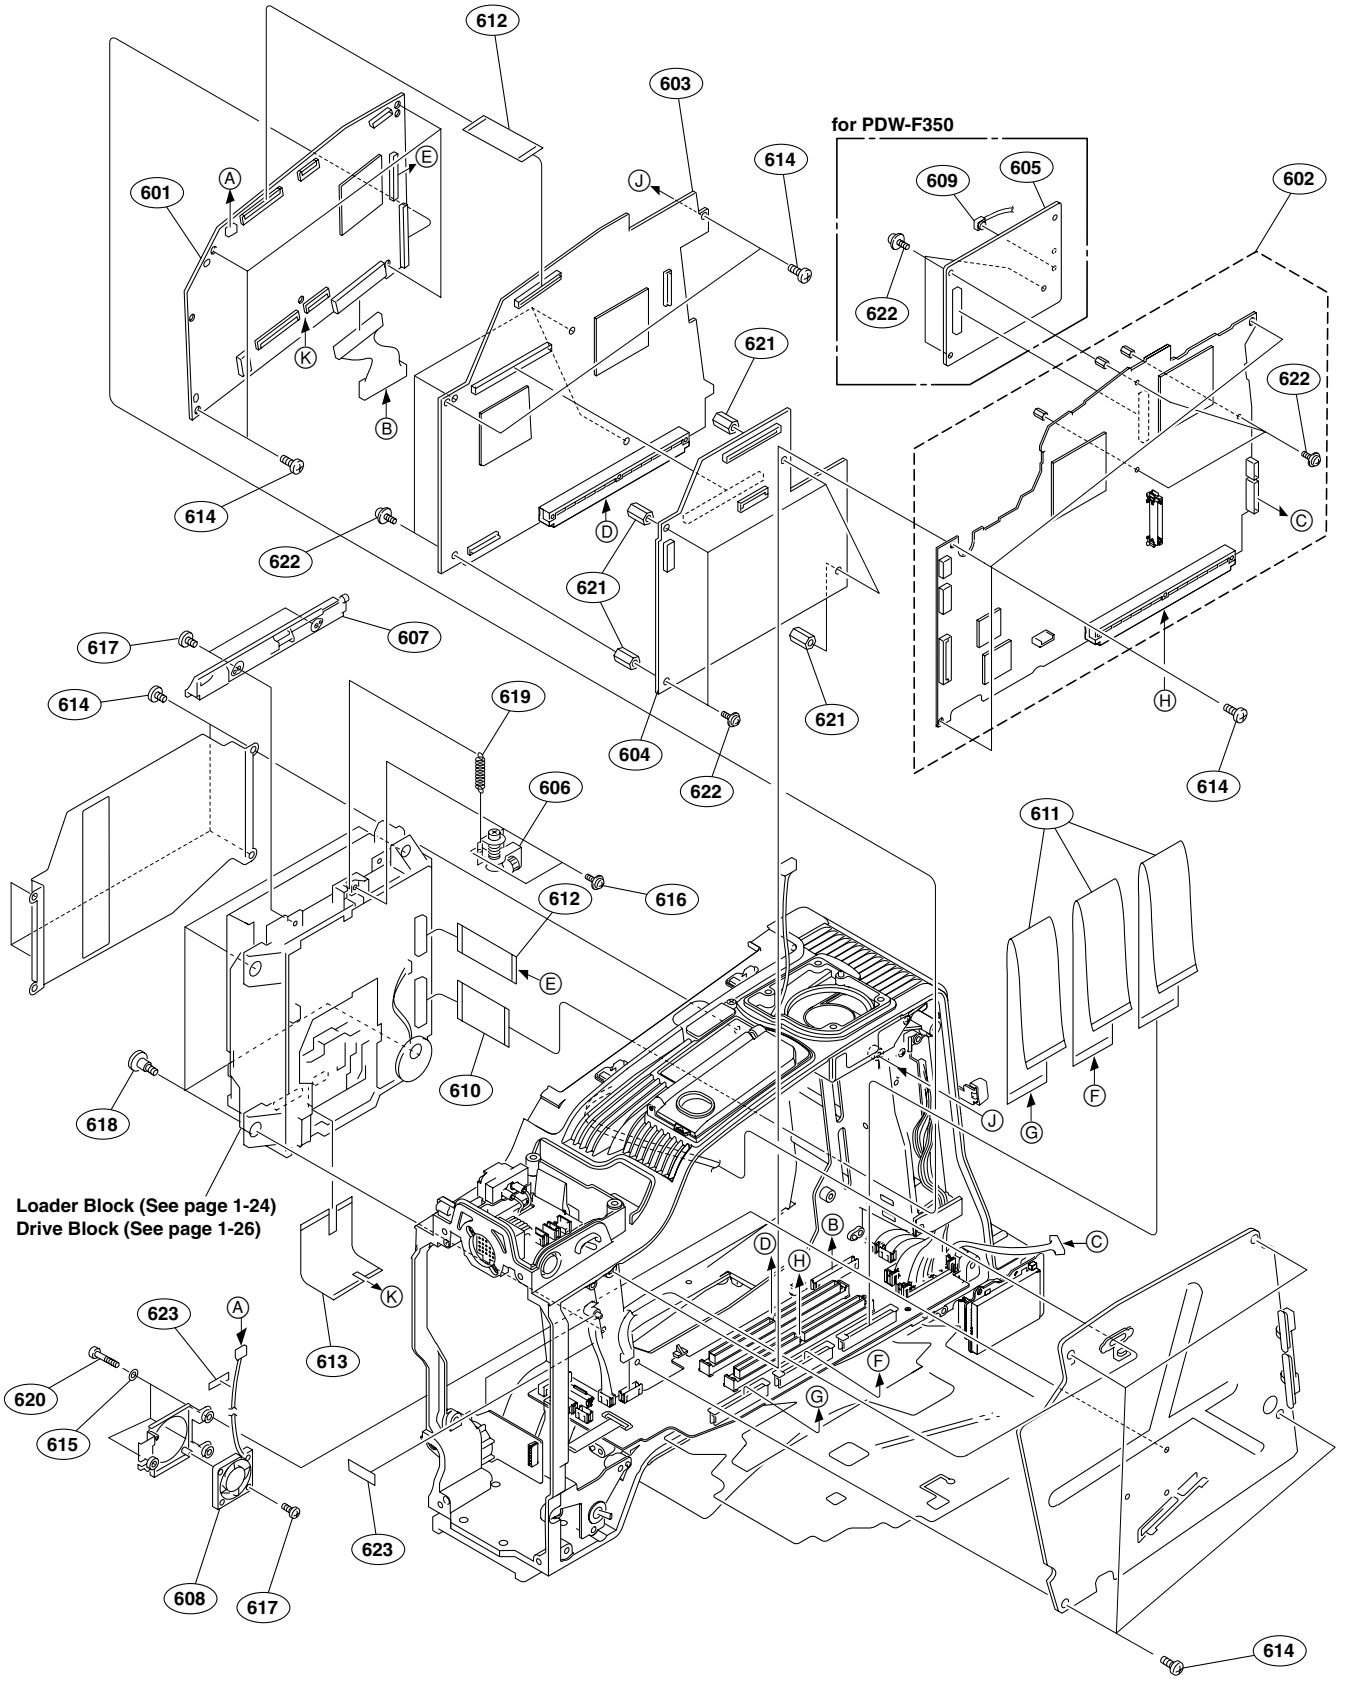
612
603
for PDW-F350
614
609
605
602
601
A
E
J
622
K
621
B
614
622
D
621
622
C
617
607
614
619
604
622
621
H
614
606
611
616
612
E
610
618
F
J
G
Loader Block (See page 1-24)
Drive Block (See page 1-26)
B
C
D
H
K
623
A
613
F
620
615
G
623
608
617
614

No.	Part No.	SP	Description
601	A-1138-490-A	s	MOUNTED CIRCUIT BOARD, DR-550G
602	A-1169-365-A	s	MOUNTED CIRCUIT BOARD, DCP-37 (for PDW-F350)
	A-1169-366-A	s	MOUNTED CIRCUIT BOARD, DCP-37A (for PDW-F330)
603	A-1169-368-A	s	MOUNTED CIRCUIT BOARD, DVP-29
604	A-1169-370-A	s	MOUNTED CIRCUIT BOARD, SY-322
605	A-1171-852-A	s	MOUNTED CIRCUIT BOARD, TX-105 (for PDW-F350)
606	A-8347-268-A	s	ME ASSY
607	X-3608-669-6	s	GUARD ASSY, SW
608	1-787-146-11	s	FAN, DC (SQUARE 30)
609	1-829-055-11	s	CABLE ASSEMBLY, COAXIAL (for PDW-F350)
610	1-831-001-11	s	CABLE, FLEXIBLE FLAT (30 CORE)
611	1-831-006-11	s	CABLE, FLEXIBLE FLAT (30 CORE)
612	1-860-067-21	s	FPC (DR-HN)
613	1-860-068-21	s	FPC (OP FLEXIBLE)
614	3-364-941-01	s	SCREW (+B) (2.6X5), NYLOK
615	3-701-438-11	s	WASHER, 2.5
616	3-729-013-41	s	SCREW(M1.4X3.5), WASHERHEAD (+P)
617	3-729-076-11	s	SCREW (+B) (2X4)
618	3-796-364-01	s	SCREW,STEP
619	3-796-403-01	s	SPRING (ME), EXTENSION
620	3-825-467-02	s	SCREW, STEP
621	3-854-997-01	s	SUPPORT (M2X7)
622	3-855-938-01	s	SCREW
623	3-941-343-01	s	TAPE (A)

Chassis-2

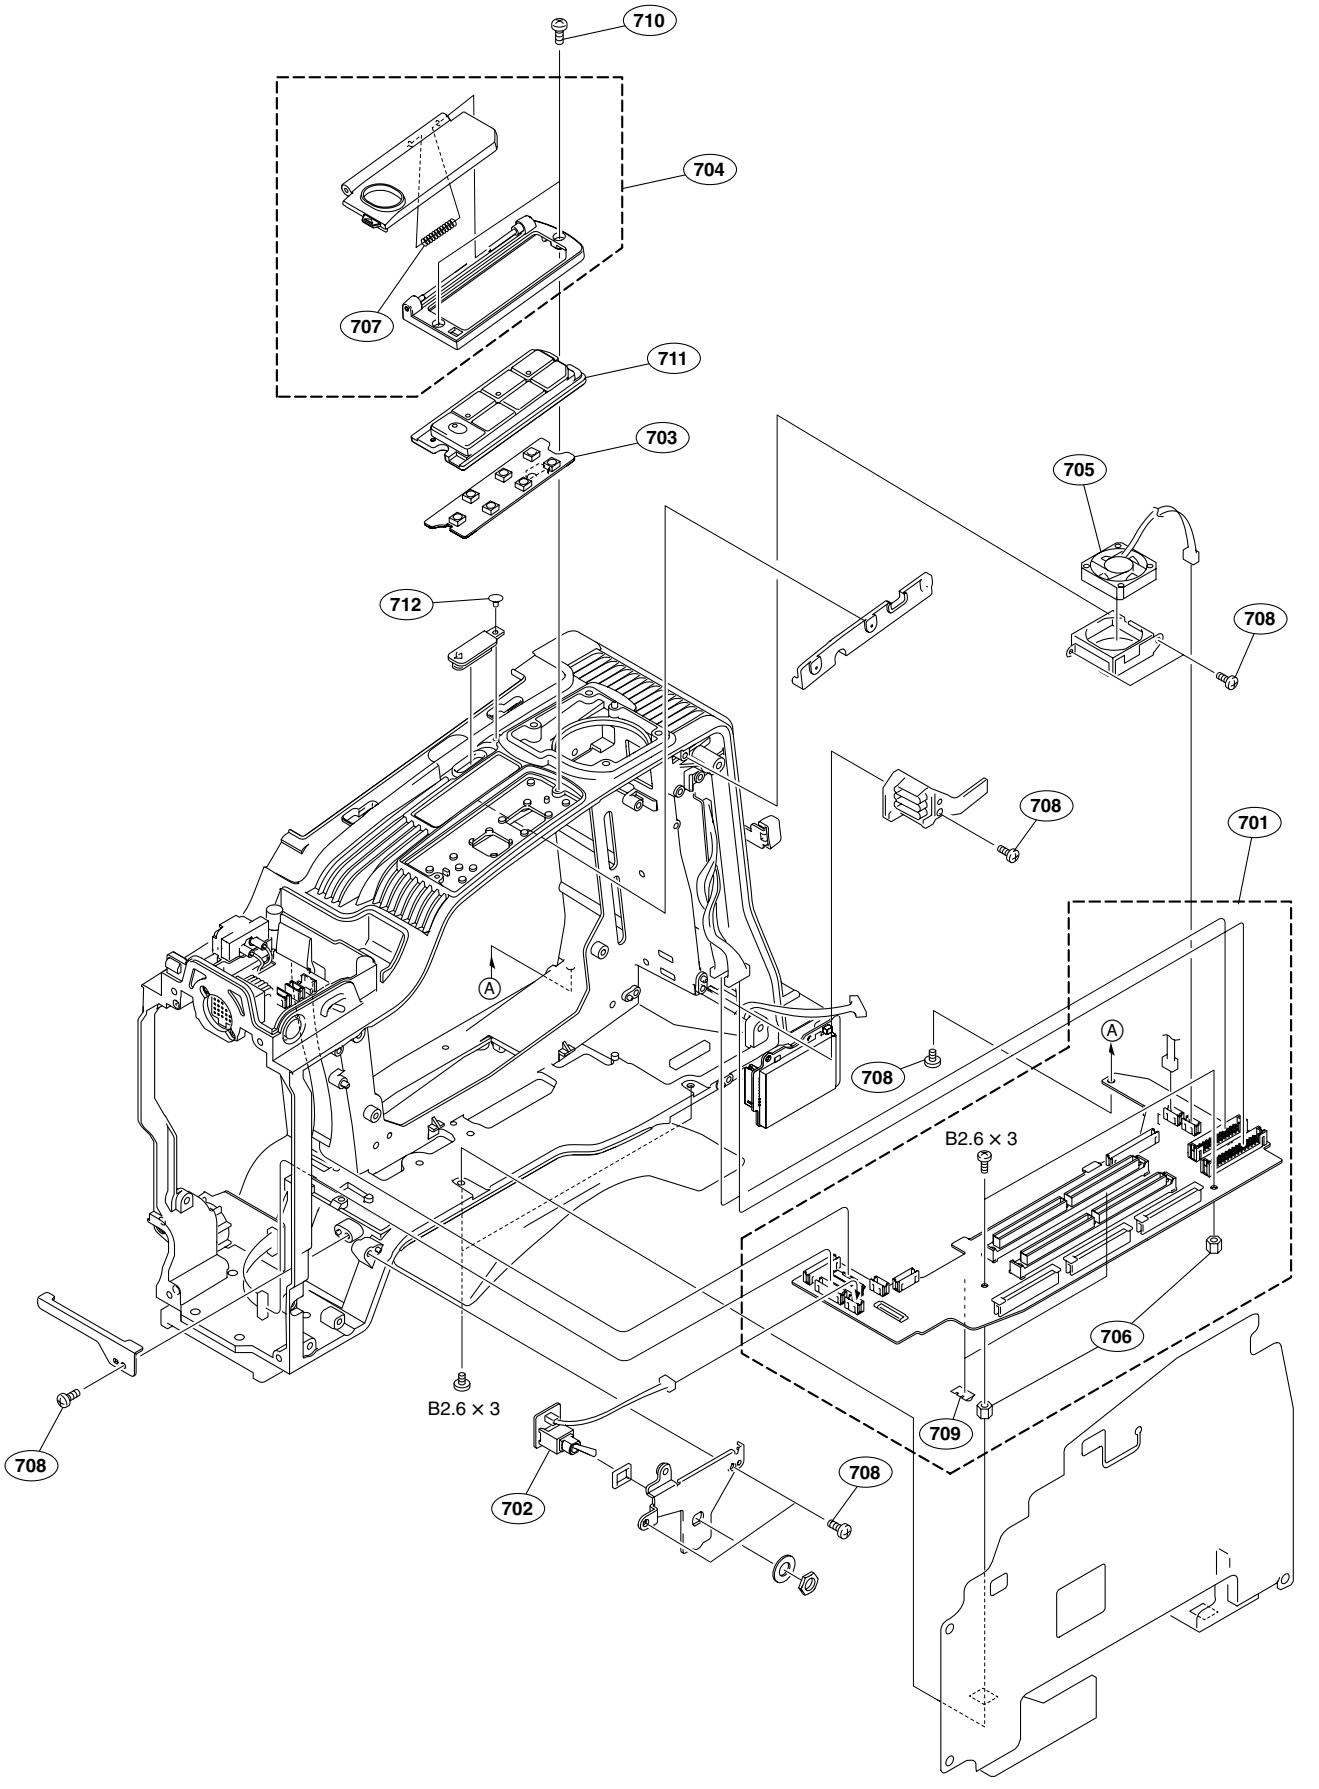
710
704
707
711
703
705
712
708
708
701
708
A
A
B2.6 × 3
706
709
B2.6 × 3
708
702
708

No.	Part No.	SP	Description
701	A-1164-280-A	s	MOUNTED CIRCUIT BOARD, MB-1028
702	A-1164-300-A	s	MOUNTED CIRCUIT BOARD, PSW-85
703	A-1171-840-A	s	MOUNTED CIRCUIT BOARD, KY-573
704	A-1174-600-A	s	KEY FRAME ASSY (for PDW-F330)
	A-1174-601-A	s	KEY FRAME ASSY (for PDW-F350)
705	1-787-070-11	s	FAN, DC (41 SQUARE)
706	2-534-514-02	o	SUPPORT (1)
707	3-234-710-01	o	SPRING (OPEN), COMPRESSION COIL
708	3-364-941-01	s	SCREW (+B) (2.6X5), NYLOK
709	3-606-303-01	s	FINGER, SHIELD
710	3-719-381-02	s	SCREW (M2X4)
711	3-797-024-02	s	COVER, KEY SW
712	3-965-077-02	s	SCREW, SPECIAL (M2)
	7-621-775-08	s	SCREW, +B 2.6X3

Chassis-3

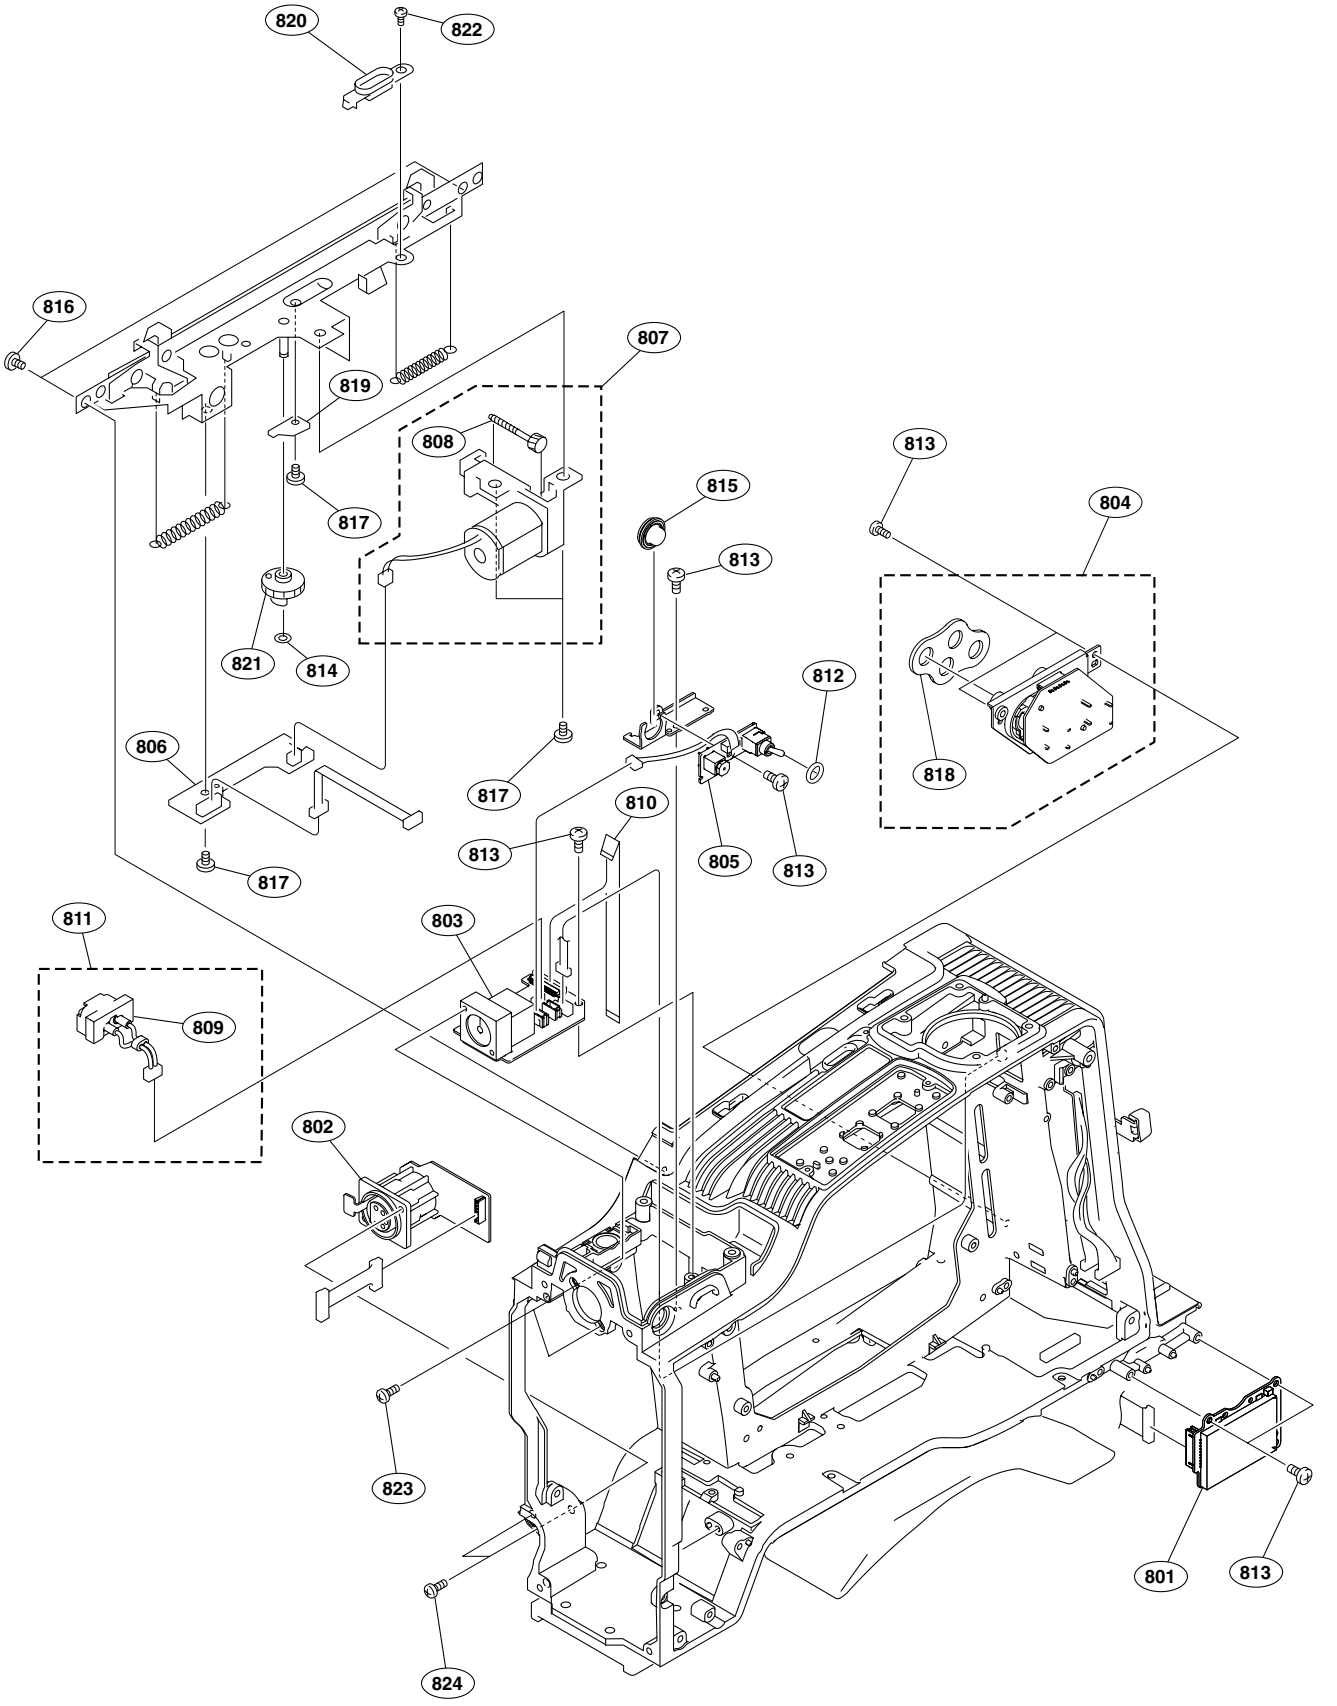
820
822
816
807
819
808
813
815
804
817
813
821
814
812
806
817
818
810
813
805
813
817
811
803
809
802
823
801
813
824

No.	Part No.	SP	Description
801	A-1164-247-A	s	MOUNTED CIRCUIT BOARD, MS-71
802	A-1164-286-A	s	MOUNTED CIRCUIT BOARD, MA-136
803	A-1164-292-A	s	MOUNTED CIRCUIT BOARD, VF-87
804	A-1164-291-A	s	MOUNTED CIRCUIT BOARD, VIO-36A (for PDW-F330)
	A-1164-293-A	s	MOUNTED CIRCUIT BOARD, VIO-36 (for PDW-F350)
805	A-1164-304-A	s	MOUNTED CIRCUIT BOARD, LGT-12
806	A-1171-839-A	s	MOUNTED CIRCUIT BOARD, SW-1246
807	A-8279-912-B	s	MOTOR SUB ASSY, LD
808	X-3945-435-3	s	SHAFT (12) ASSY, WORM
809	1-543-157-11	s	BEAD, FERRITE
810	1-832-098-11	s	CABLE, FLEXIBLE FLAT (30 CORE)
811	1-964-607-11	s	HARNESS, SUB (DDOUTLGT)
812	3-312-823-01	s	PACKING, KNOB
813	3-364-941-01	s	SCREW (+B) (2.6X5), NYLOK
814	3-559-408-11	s	WASHER, POLYETHYLENE, DIA.1.2
815	3-641-917-01	s	COVER, SWITCH (CC)
816	3-719-381-02	s	SCREW (M2X4)
817	3-729-076-11	s	SCREW (+B) (2X4)
818	3-796-990-01	s	CUSION DROP PROTECTION
819	3-797-030-01	s	ARM, RELEASE
820	3-797-031-03	s	GUIDE, EJECT
821	3-797-063-03	s	GEAR, RELEASE
822	3-965-077-02	s	SCREW, SPECIAL (M2)
823	4-654-273-02	s	ACE (M2), LOCK
824	4-674-315-01	s	SCREW (M2.6X6)

Connector Block

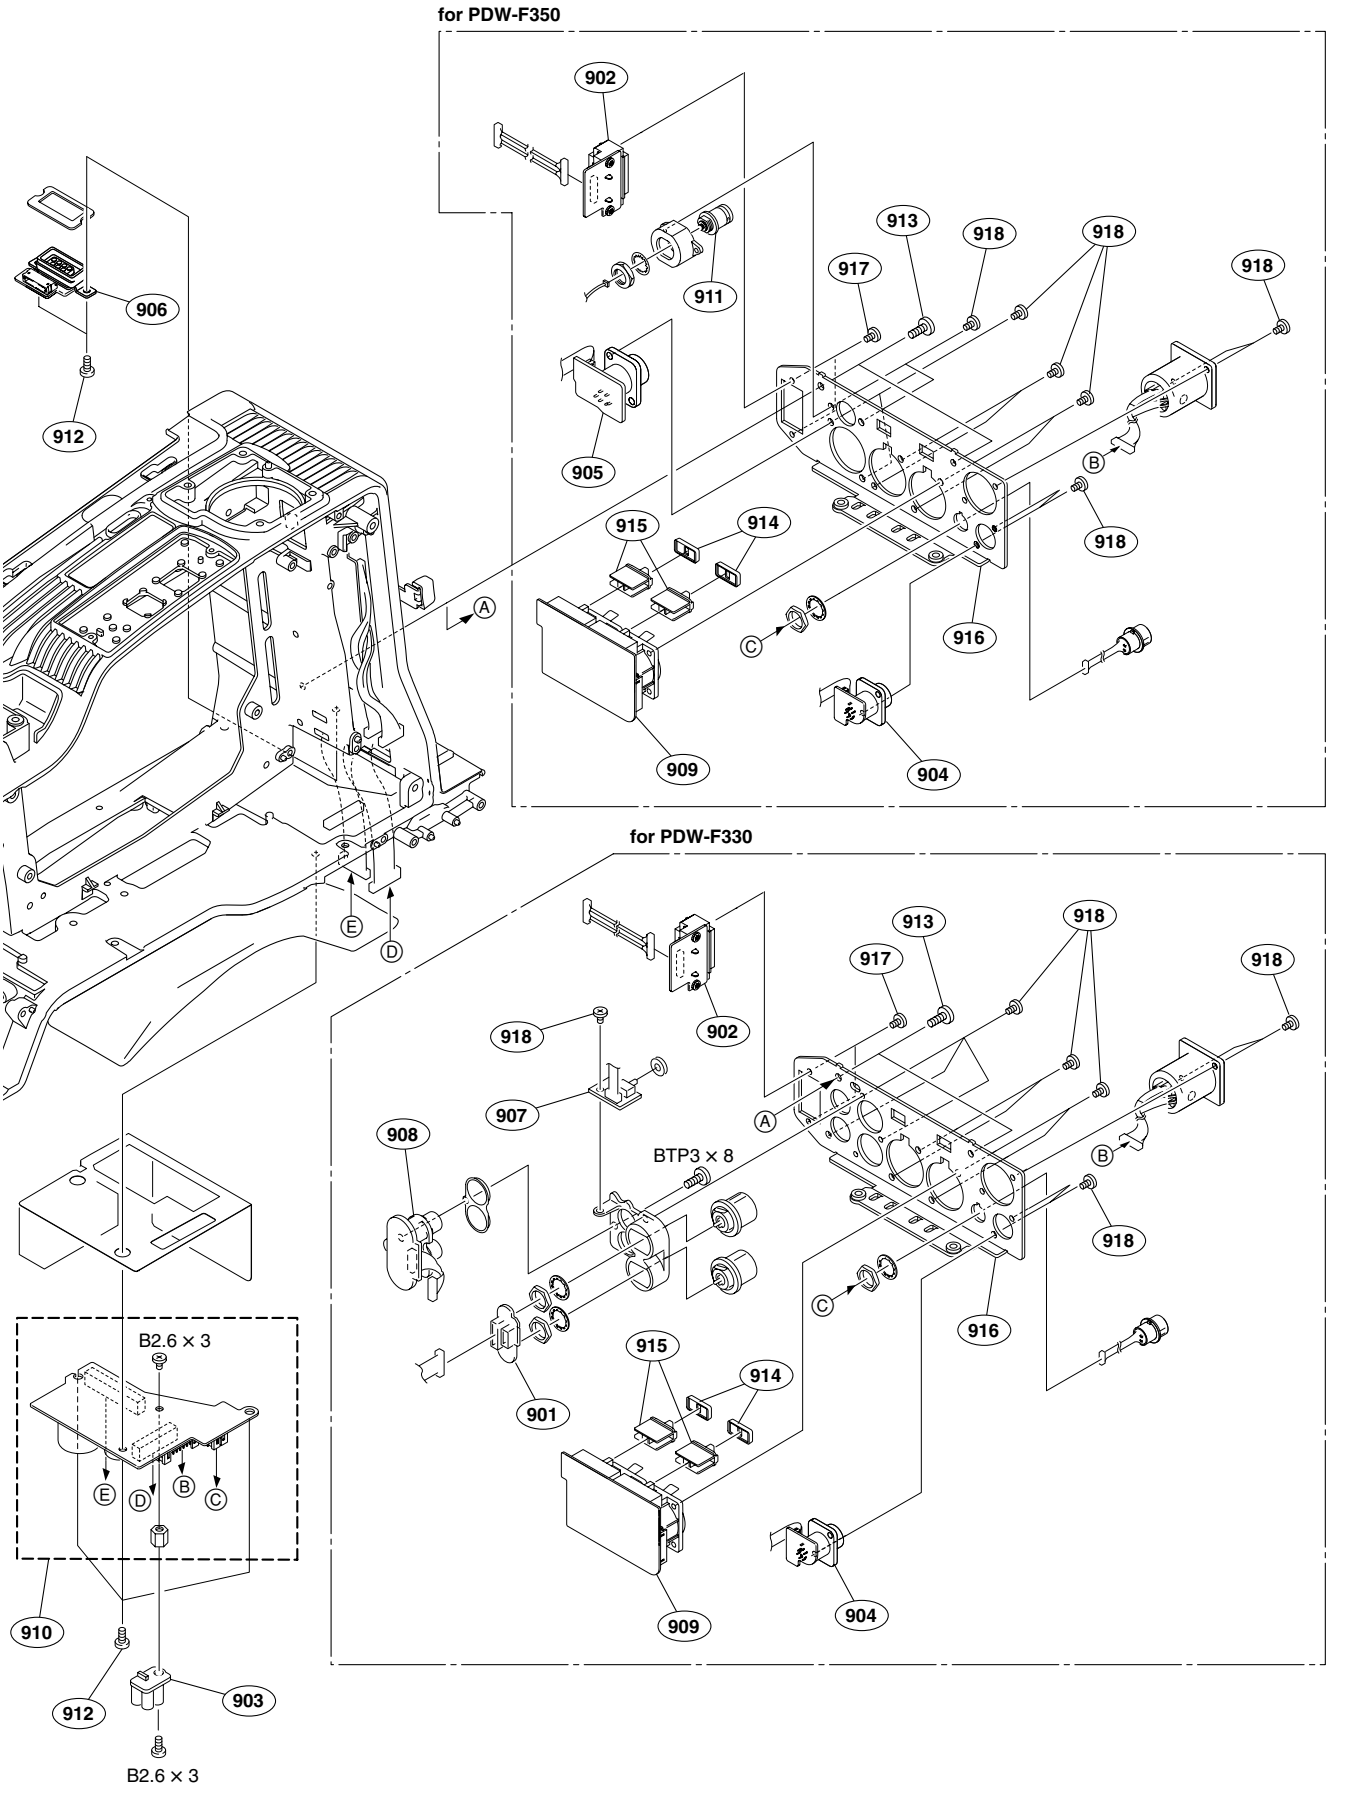

No.	Part No.	SP	Description
901	A-1164-248-A	s	MOUNTED CIRCUIT BOARD, IO-228 (for PDW-F330)
902	A-1164-277-A	s	MOUNTED CIRCUIT BOARD, CN-2624
903	A-1164-283-A	s	MOUNTED CIRCUIT BOARD, PS-708
904	A-1164-288-A	s	MOUNTED CIRCUIT BOARD, RM-203
905	A-1164-290-A	s	MOUNTED CIRCUIT BOARD, AU-307 (STEREO) (for PDW-F350)
	A-1189-037-A	s	MOUNTED CIRCUIT BOARD, AU-307C (MONO) (for PDW-F350)
906	A-1164-294-A	s	MOUNTED CIRCUIT BOARD, RX-96
907	A-1164-295-A	s	MOUNTED CIRCUIT BOARD, TC-110 (for PDW-F330)
908	A-1164-296-A	s	MOUNTED CIRCUIT BOARD, JK-73 (for PDW-F330)
909	A-1173-415-A	s	MOUNTED CIRCUIT BOARD, AA-112
910	A-1173-416-A	s	MOUNTED CIRCUIT BOARD, CNB-18
911	1-784-240-11	s	CONVERTER, COAXIAL CONNECTOR (for PDW-F350)
912	3-364-941-01	s	SCREW (+B) (2.6X5), NYLOK
913	3-742-074-13	s	SCREW, (+B 3X8)
914	3-796-985-02	s	CUSHION, DROP PROTECTION
915	3-796-986-01	s	KNOB, SLIDE SW
916	3-991-411-01		PANEL, CN (for PDW-F350)
	3-991-425-01	s	PANEL, CN (for PDW-F330)
917	4-654-273-02	s	ACE (M2), LOCK
918	4-674-315-01	s	SCREW, (M2.6X6)
	7-621-775-08	s	SCREW, +B 2.6X3
	7-685-546-19	s	SCREW +BTP 3X8 (for PDW-F330)

Rear Block

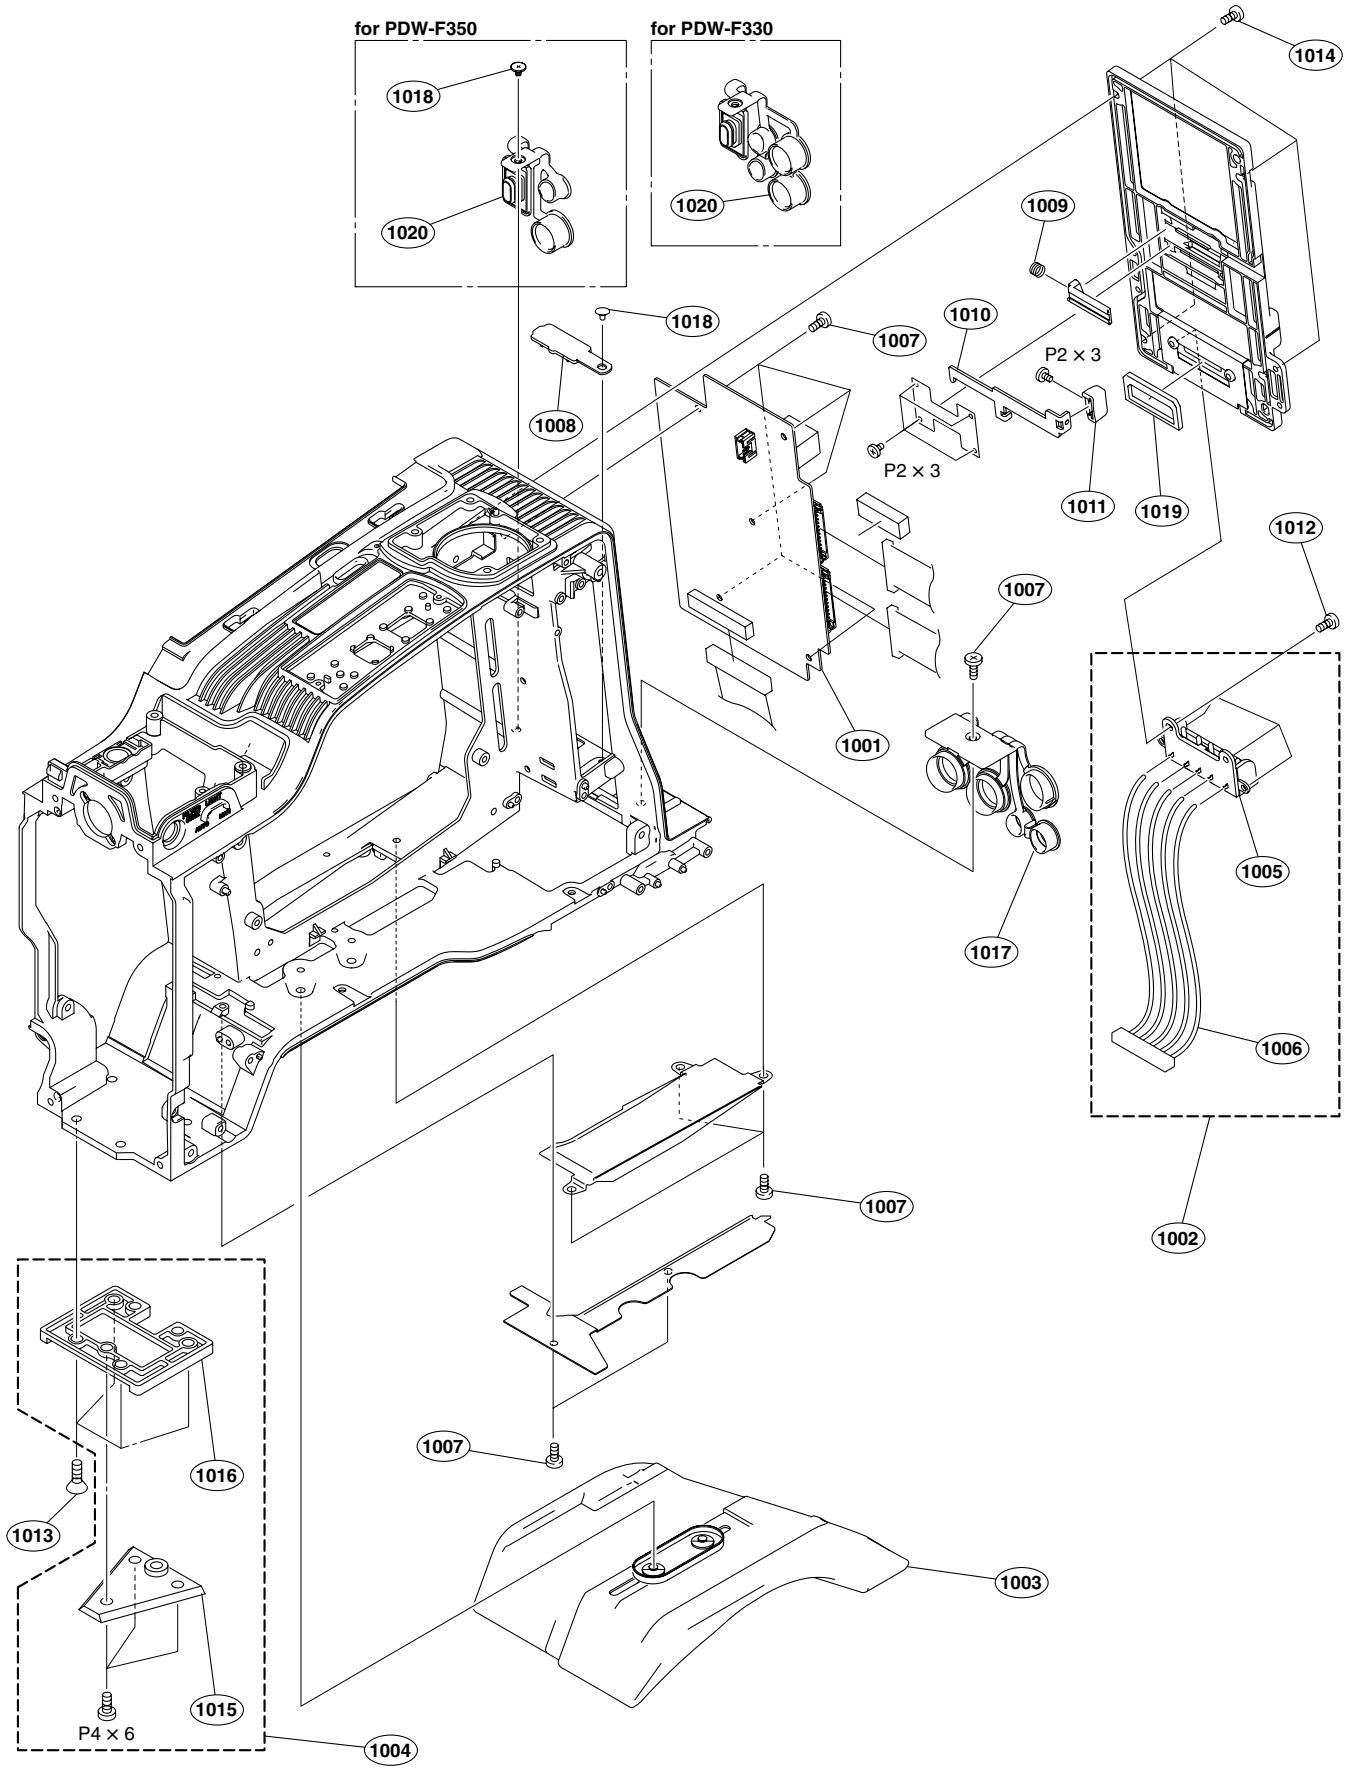
for PDW-F350
for PDW-F330
1018
1020
1020
1014
1009
1018
1007
1010
P2 × 3
1008
P2 × 3
1011
1019
1012
1007
1001
1005
1017
1006
1002
1007
1016
1013
1007
1003
1015
P4 × 6
1004

No.	Part No.	SP	Description
1001	A-1169-367-A	s	MOUNTED CIRCUIT BOARD, RE-236
1002	A-1176-852-A	s	ASSY, BATTERY HARNESS
1003	A-8279-878-F	s	PAD ASSY, SHOULDER
1004	A-8279-993-B	s	SHOE (D) ASSY, V
1005	1-820-459-11	s	CONNECTOR, BATTERY
1006	1-964-625-11	s	HARNESS, SUB (BATT)
1007	3-364-941-01	s	SCREW (+B) (2.6X5), NYLOK
1008	3-612-698-03	s	COVER, CN (WIRELESS)
1009	3-679-648-02	o	SPRING, COMPRESSION
1010	3-679-688-03	s	LEVER, RELEASE
1011	3-680-952-02	o	KNOB, RELEASE LEVER
1012	3-694-181-03	s	TYPE1, AROCK PRECISION +P 2.6X5
1013	3-729-072-02	s	SCREW, +K (4X8)
1014	3-742-074-13	s	SCREW, (+B 3X8)
1015	3-854-769-02	s	SHOE (D), CAMERA
1016	3-854-770-02	s	WEDGE (D), MOUNTING
1017	3-868-762-11	s	CAP (L), CONNECTOR
1018	3-965-077-02	s	SCREW, SPECIAL (M2)
1019	3-991-420-01	s	CUSION, REAR DROP PROTECTION
1020	3-991-422-01	s	CAP(R2), CONNECTOR (for PDW-F330)
	3-991-424-02	s	CAP (R3), CONNECTOR (for PDW-F350)
	7-627-553-38	s	SCREW, PRECISION +P 2X3
	7-682-160-09	s	SCREW, +P 4X6

Loader Block

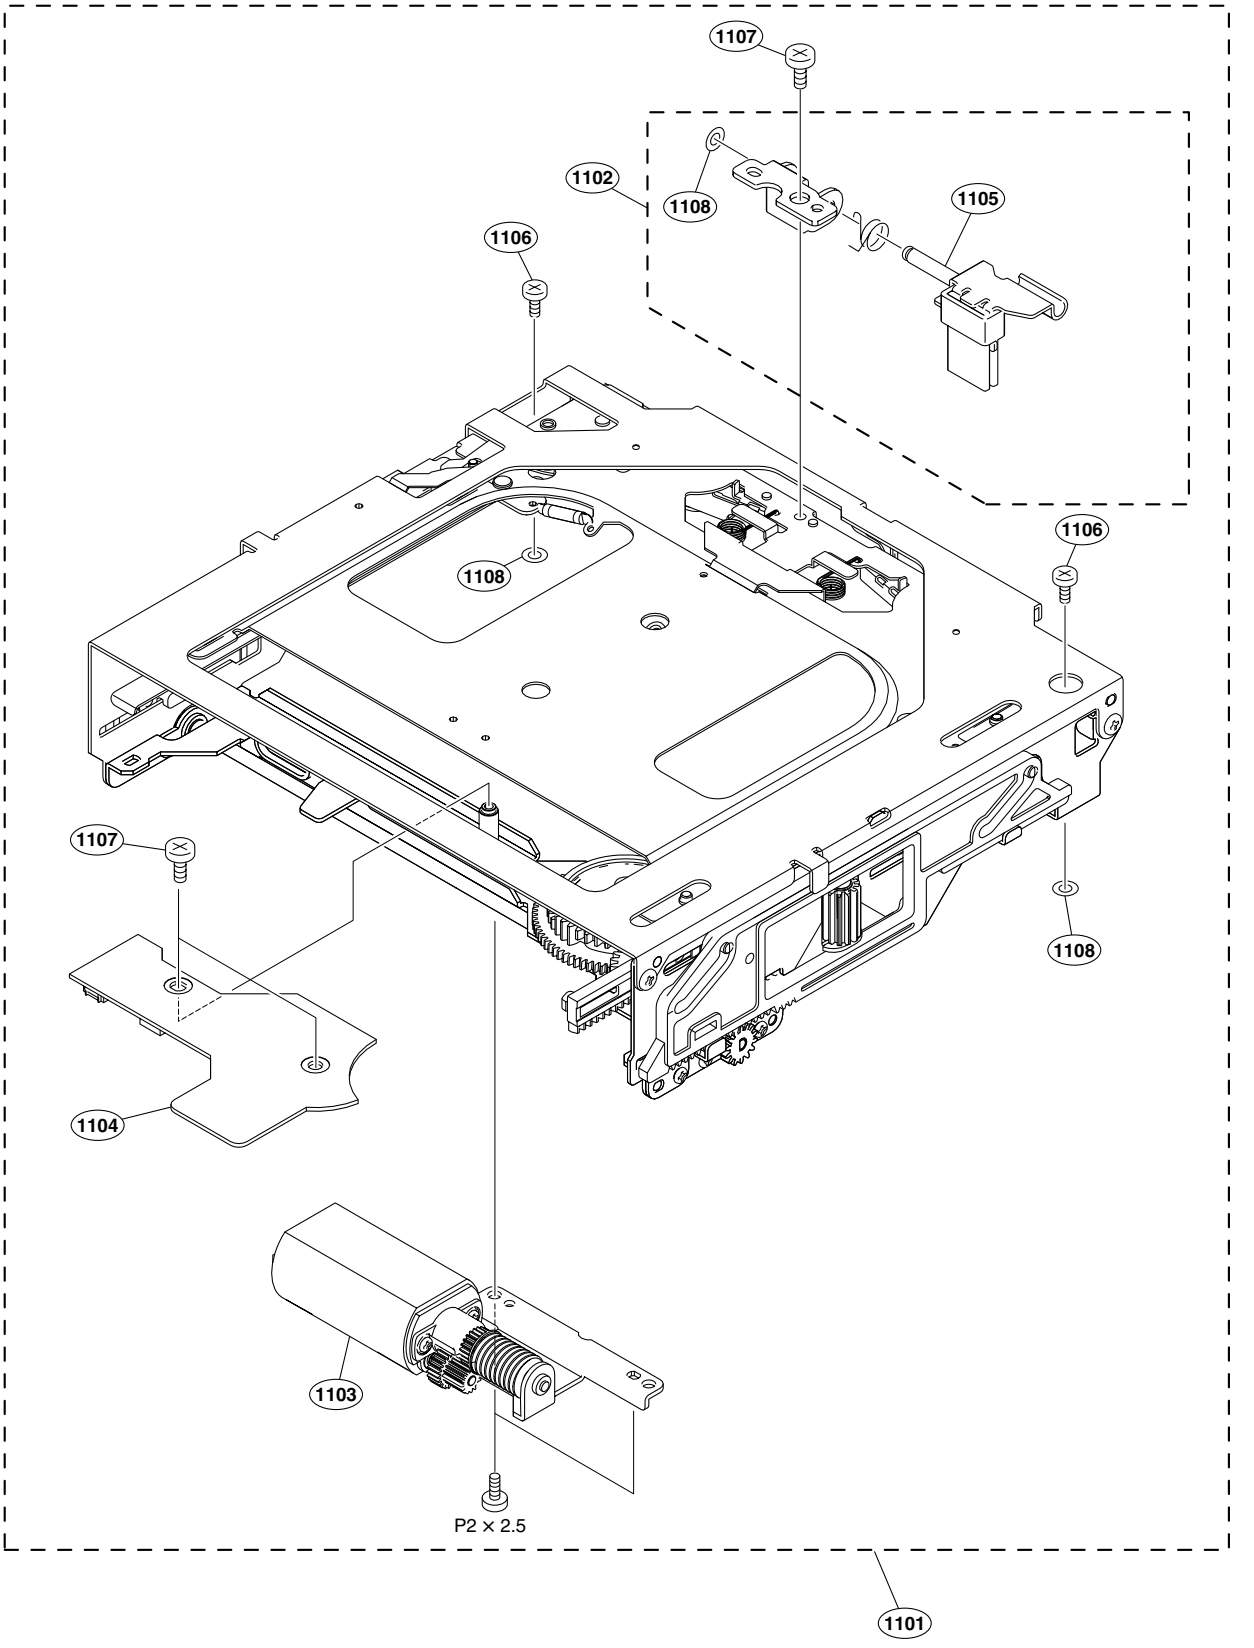

No.	Part No.	SP	Description
1101	A-1147-155-A	s	LOADER ASSY (RP), P1
1102	A-8347-266-B	s	CLEANER (P1) ASSY
1103	A-8347-267-A	s	MOTOR (P1) ASSY, LOADING
1104	A-8347-272-A	s	MOUNTED CIRCUIT BOARD, SE-709
1105	X-3608-677-5	s	BRACKET ASSY,BRUSH
1106	2-640-315-02	o	SCREW (M2X5), SMALL, +P, SW
1107	3-624-231-01	s	SCREW M2, SPECIAL
1108	3-669-465-01	s	WASHER (1.5), STOPPER
	7-627-854-08	s	PRECISION SCREW +P 2X2.5 TYPE3

Drive Block

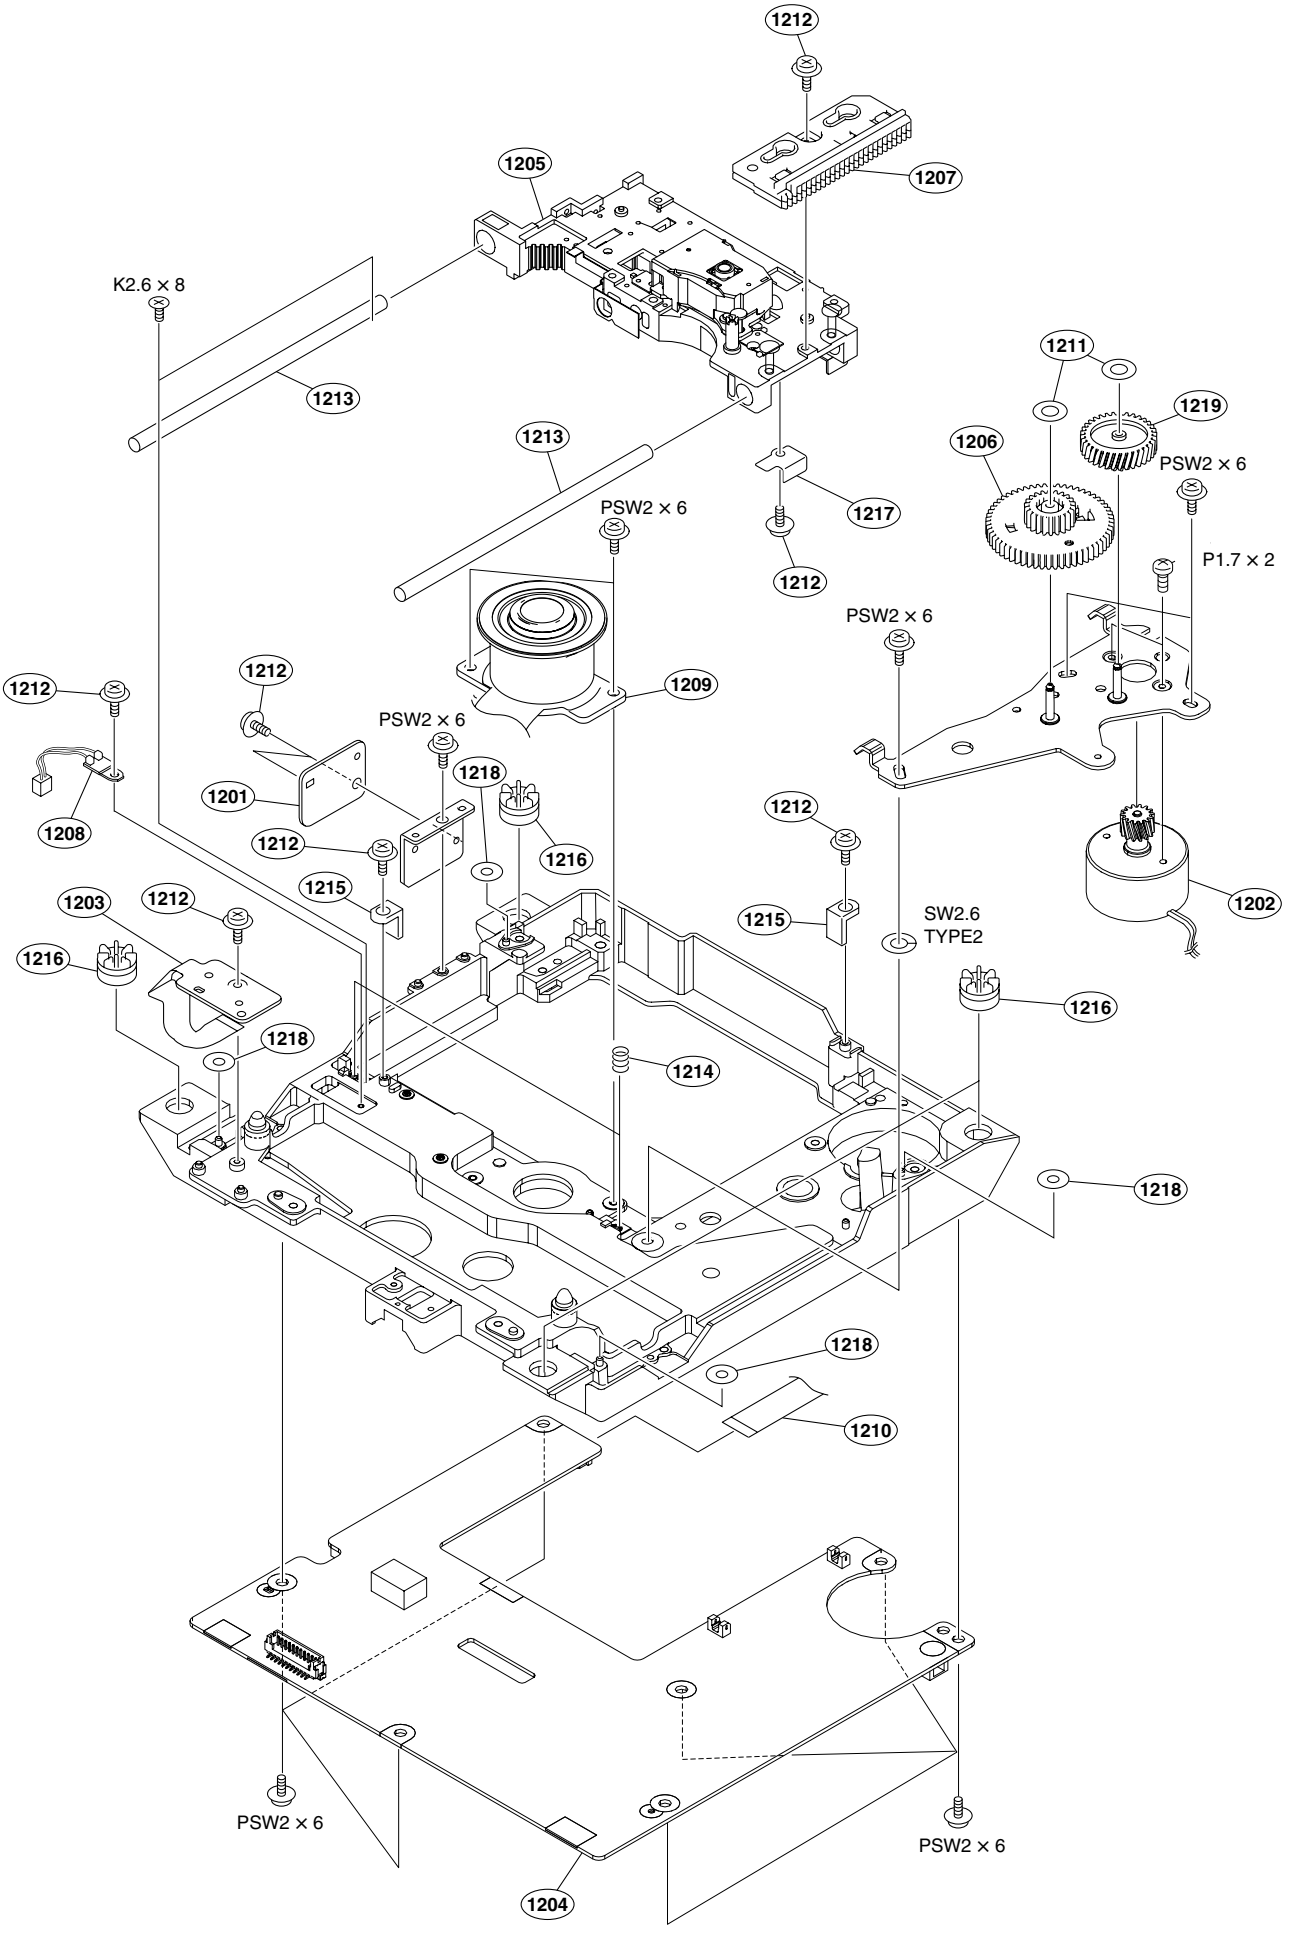
1212
1205
1207
K2.6 × 8
1213
1211
1219
1206
PSW2 × 6
1213
PSW2 × 6
1217
P1.7 × 2
1212
PSW2 × 6
1212
1209
1212
PSW2 × 6
1218
1201
1208
1212
1216
1212
1215
1215
SW2.6
TYPE2
1202
1203
1212
1216
1216
1218
1214
1218
1218
1210
PSW2 × 6
PSW2 × 6
1204

No.	Part No.	SP	Description
1201	A-1097-229-A	s	MOUNTED CIRCUIT BOARD, SE-800
1202	A-1097-729-B	s	MOTOR (P10) ASSY, SEEK
1203	A-1138-488-A	s	MOUNTED CIRCUIT BOARD, SW-1124G
1204	A-1138-492-A	s	MOUNTED CIRCUIT BOARD, HN-300G
1205 ⚠	A-1139-275-A	s	OPTICAL BLOCK ASSY KES110A (RP)
1206	A-8279-869-B	s	GEAR ASSY, NO.3
1207	A-8279-870-C	s	RACK ASSY, SLED
1208	1-417-353-11	s	SENSOR, DEW CONDENSATION
1209 ⚠	1-787-046-51	s	MOTOR, DC (SPINDLE)
1210	1-860-624-21	s	FPC (SW1125-HN292)
1211	3-669-465-01	s	WASHER (1.5), STOPPER
1212	3-729-013-41	s	SCREW (M1.4X3.5), WASHERHEAD (+P)
1213	3-796-306-01	s	SHAFT, SLIDE
1214	3-796-307-01	s	SPRING (SKEW), COMPRESSION
1215	3-796-308-02	s	CUSHION
1216	3-796-363-02	s	DAMPER, SY
1217	3-796-375-01	s	SHUTTER
1218	3-854-705-01	s	SPACER LD
1219	3-986-527-01	s	NO.2 GEAR
	7-621-592-10	s	SCREW, +K 2.6X8
	7-623-207-22	s	SW 2.6, TYPE 2
	7-627-552-28	s	SCREW, PRECISION +P 1.7X2
	7-628-000-05	s	+PSW 2X6

1-3. Electrical Parts List

AA-112 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1173-415-A	s	MOUNTED CIRCUIT BOARD, AA-112
1pc	1-573-183-11	o	HOUSING, CONNECTOR 13P
C1	1-107-826-91	s	CAP, CHIP CERAMIC 100000PF B
C2	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3	1-107-826-91	s	CAP, CHIP CERAMIC 100000PF B
C4	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C5	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C6	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C7	1-164-315-91	s	CAP, CERAMIC 470PF CH (1608)
C8	1-164-315-91	s	CAP, CERAMIC 470PF CH (1608)
C9	1-128-991-21	s	CAP, ELECT 10MF (5.3X5.5)
C10	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C11	1-128-991-21	s	CAP, ELECT 10MF (5.3X5.5)
C12	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C13	1-107-826-91	s	CAP, CHIP CERAMIC 100000PF B
C14	1-128-991-21	s	CAP, ELECT 10MF (5.3X5.5)
C15	1-128-991-21	s	CAP, ELECT 10MF (5.3X5.5)
C16	1-128-991-21	s	CAP, ELECT 10MF (5.3X5.5)
C17	1-128-991-21	s	CAP, ELECT 10MF (5.3X5.5)
C18	1-107-826-91	s	CAP, CHIP CERAMIC 100000PF B
C19	1-107-826-91	s	CAP, CHIP CERAMIC 100000PF B
C20	1-107-826-91	s	CAP, CHIP CERAMIC 100000PF B
C21	1-107-826-91	s	CAP, CHIP CERAMIC 100000PF B
C22	1-162-927-91	s	CAP, CERAMIC 100PF CH 1608
C23	1-162-927-91	s	CAP, CERAMIC 100PF CH 1608
C24	1-162-927-91	s	CAP, CERAMIC 100PF CH 1608
C25	1-162-927-91	s	CAP, CERAMIC 100PF CH 1608
CN1	1-565-282-11	o	CONNECTOR, XLR TYPE 3P
CN2	1-565-282-11	o	CONNECTOR, XLR TYPE 3P
D1	8-719-820-42	s	DIODE 1SS302-TE85L
D2	8-719-820-42	s	DIODE 1SS302-TE85L
D3	8-719-820-42	s	DIODE 1SS302-TE85L
D4	8-719-820-42	s	DIODE 1SS302-TE85L
D5	8-719-024-83	s	DIODE 1SS301-TE85L
D6	8-719-024-83	s	DIODE 1SS301-TE85L
IC2	8-759-144-75	s	IC UPC4572G2-E2
IC3	8-759-144-75	s	IC UPC4572G2-E2
L1	1-428-965-11	s	COIL, CHOKE (SMD)
L2	1-428-965-11	s	COIL, CHOKE (SMD)
Q1	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q2	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q3	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q4	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q5	8-729-202-14	s	TRANSISTOR 2SC2713G-TE85L
Q6	8-729-202-14	s	TRANSISTOR 2SC2713G-TE85L
Q7	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q8	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q10	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q11	8-729-012-34	s	TRANSISTOR 2SK711-BL(TE85L)
Q12	8-729-012-34	s	TRANSISTOR 2SK711-BL(TE85L)
Q13	8-729-012-34	s	TRANSISTOR 2SK711-BL(TE85L)
Q14	8-729-012-34	s	TRANSISTOR 2SK711-BL(TE85L)
R1	1-216-825-91	s	RES, CHIP 2.2K (1608)
R2	1-216-825-91	s	RES, CHIP 2.2K (1608)
R3	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R4	1-216-864-91	s	CONDUCTOR, CHIP (1608)

(AA-112 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R5	1-218-863-91	s	RES, CHIP 4.7K (1608)
R6	1-218-837-91	s	RES, CHIP 390 (1608)
R7	1-218-863-91	s	RES, CHIP 4.7K (1608)
R8	1-218-837-91	s	RES, CHIP 390 (1608)
R9	1-218-863-91	s	RES, CHIP 4.7K (1608)
R10	1-218-837-91	s	RES, CHIP 390 (1608)
R11	1-218-863-91	s	RES, CHIP 4.7K (1608)
R12	1-218-879-91	s	RES, CHIP 22K (1608)
R13	1-218-839-91	s	RES, CHIP 470 (1608)
R14	1-218-863-91	s	RES, CHIP 4.7K (1608)
R15	1-218-837-91	s	RES, CHIP 390 (1608)
R16	1-218-863-91	s	RES, CHIP 4.7K (1608)
R17	1-218-879-91	s	RES, CHIP 22K (1608)
R18	1-218-839-91	s	RES, CHIP 470 (1608)
R19	1-218-871-91	s	RES, CHIP 10K (1608)
R20	1-218-879-91	s	RES, CHIP 22K (1608)
R21	1-218-871-91	s	RES, CHIP 10K (1608)
R22	1-218-879-91	s	RES, CHIP 22K (1608)
R23	1-216-849-91	s	RES, CHIP 220K (1608)
R24	1-218-871-91	s	RES, CHIP 10K (1608)
R25	1-218-879-91	s	RES, CHIP 22K (1608)
R26	1-218-871-91	s	RES, CHIP 10K (1608)
R27	1-218-879-91	s	RES, CHIP 22K (1608)
R28	1-216-849-91	s	RES, CHIP 220K (1608)
R29	1-218-863-91	s	RES, CHIP 4.7K (1608)
R30	1-218-823-91	s	RES, CHIP 100 (1608)
R31	1-218-871-91	s	RES, CHIP 10K (1608)
R32	1-218-871-91	s	RES, CHIP 10K (1608)
R33	1-218-823-91	s	RES, CHIP 100 (1608)
R34	1-218-823-91	s	RES, CHIP 100 (1608)
R35	1-218-863-91	s	RES, CHIP 4.7K (1608)
R36	1-218-823-91	s	RES, CHIP 100 (1608)
R37	1-218-871-91	s	RES, CHIP 10K (1608)
R38	1-218-871-91	s	RES, CHIP 10K (1608)
R39	1-218-883-91	s	RES, CHIP 33K (1608)
R40	1-218-871-91	s	RES, CHIP 10K (1608)
R41	1-218-887-91	s	RES, CHIP 47K (1608)
R42	1-218-887-91	s	RES, CHIP 47K (1608)
R43	1-216-857-91	s	RES, CHIP 1.0M (1608)
R44	1-218-827-91	s	RES, CHIP 150 (1608)
R45	1-218-827-91	s	RES, CHIP 150 (1608)
R46	1-216-857-91	s	RES, CHIP 1.0M (1608)
R47	1-216-857-91	s	RES, CHIP 1.0M (1608)
R48	1-218-883-91	s	RES, CHIP 33K (1608)
R49	1-218-847-91	s	RES, CHIP 1.0K (1608)
R50	1-216-857-91	s	RES, CHIP 1.0M (1608)
R51	1-216-857-91	s	RES, CHIP 1.0M (1608)
R52	1-218-827-91	s	RES, CHIP 150 (1608)
R53	1-218-827-91	s	RES, CHIP 150 (1608)
R54	1-216-857-91	s	RES, CHIP 1.0M (1608)
R55	1-216-857-91	s	RES, CHIP 1.0M (1608)
R56	1-218-883-91	s	RES, CHIP 33K (1608)
R57	1-218-847-91	s	RES, CHIP 1.0K (1608)
R58	1-216-857-91	s	RES, CHIP 1.0M (1608)
R59	1-218-851-91	s	RES, CHIP 1.5K (1608)
R60	1-218-851-91	s	RES, CHIP 1.5K (1608)
R61	1-218-851-91	s	RES, CHIP 1.5K (1608)
R62	1-218-851-91	s	RES, CHIP 1.5K (1608)
R63	1-218-859-91	s	RES, CHIP 3.3K (1608)

(AA-112 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R64	1-218-859-91	s	RES, CHIP 3.3K (1608)
R65	1-218-859-91	s	RES, CHIP 3.3K (1608)
R66	1-218-859-91	s	RES, CHIP 3.3K (1608)
S1	1-572-042-11	s	SWITCH, SLIDE
S2	1-572-042-11	s	SWITCH, SLIDE

AU-307 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1164-290-A	s	MOUNTED CIRCUIT BOARD, AU-307
1pc	1-569-978-11	o	PIN, CONNECTOR (PC BOARD) 7P
CN2	1-774-795-11	s	CONNECTOR, XLR (RECEPTACLE) 5P
L1	1-428-965-11	s	COIL, CHOKE (SMD)
L2	1-428-965-11	s	COIL, CHOKE (SMD)
R2	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R3	1-216-864-91	s	CONDUCTOR, CHIP (1608)

AU-307C BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1189-037-A	s	MOUNTED CIRCUIT BOARD, AU-307C
1pc	1-569-978-11	o	PIN, CONNECTOR (PC BOARD) 7P
CN1	1-565-281-11	o	CONNECTOR, XLR TYPE 3P
L1	1-428-965-11	s	COIL, CHOKE (SMD)
L2	1-428-965-11	s	COIL, CHOKE (SMD)
R1	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R3	1-216-864-91	s	CONDUCTOR, CHIP (1608)

CN-2624 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1164-277-A	s	MOUNTED CIRCUIT BOARD, CN-2624
2pcs	3-729-076-11	s	SCREW (+B) (2X4)
CN1	1-793-304-12	s	SQUARE-BUILT CONNECTOR(1394)
CN2	1-820-029-11	s	PIN, CONNECTOR (1.5MM) (SMD)8P
L1	1-469-972-21	s	COIL,CHOKE
R1	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2	1-218-990-81	s	CONDUCTOR, CHIP (1005)

CN-2829 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1164-301-A	s	MOUNTED CIRCUIT BOARD, CN-2829
1pc	1-569-521-11	o	HOUSING, CONNECTOR 11P
CN1	1-562-221-31	s	CONNECTOR (ROUND TYPE)(R-F)12P
FB1	1-414-445-21	s	FERRITE, EMI (SMD) (1608)
FB2	1-414-445-21	s	FERRITE, EMI (SMD) (1608)
FB3	1-414-445-21	s	FERRITE, EMI (SMD) (1608)
FB4	1-414-445-21	s	FERRITE, EMI (SMD) (1608)
FB5	1-414-445-21	s	FERRITE, EMI (SMD) (1608)
FB6	1-414-445-21	s	FERRITE, EMI (SMD) (1608)
FB7	1-414-445-21	s	FERRITE, EMI (SMD) (1608)
FB8	1-414-445-21	s	FERRITE, EMI (SMD) (1608)
FB9	1-414-445-21	s	FERRITE, EMI (SMD) (1608)
FB10	1-414-772-21	s	FERRITE. EMI (SMD) (2012)
FB11	1-414-772-21	s	FERRITE. EMI (SMD) (2012)

CNB-18 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1173-416-A	s	MOUNTED CIRCUIT BOARD, CNB-18
1pc	7-621-775-08	s	SCREW +B 2.6X3
C1	1-107-826-91	s	CAP, CHIP CERAMIC 100000PF B
C2	1-107-826-91	s	CAP, CHIP CERAMIC 100000PF B
C3	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3225
C4	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C5	1-165-811-91	s	CAP, CHIP CERAMIC 22MF B 4532
C6	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C7	1-162-964-91	s	CAP,CHIP CERAMIC 1000PF B 1608
C8	1-162-964-91	s	CAP,CHIP CERAMIC 1000PF B 1608
C9	1-162-964-91	s	CAP,CHIP CERAMIC 1000PF B 1608
C10	1-107-826-91	s	CAP, CHIP CERAMIC 100000PF B
C11	1-107-826-91	s	CAP, CHIP CERAMIC 100000PF B
C13	1-107-826-91	s	CAP, CHIP CERAMIC 100000PF B
C14	1-107-826-91	s	CAP, CHIP CERAMIC 100000PF B
C15	1-107-826-91	s	CAP, CHIP CERAMIC 100000PF B
C16	1-125-891-91	s	CAP, CHIP CERAMIC0.47MF B 1608
C17	1-107-826-91	s	CAP, CHIP CERAMIC 100000PF B
C18	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C19	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C24	1-165-629-91	s	CAP, CERAMIC 1000000PF B(3225)
C25	1-107-420-21	s	CAP, CHIP ELECT 47MF
C26	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C27	1-107-826-91	s	CAP, CHIP CERAMIC 100000PF B
C28	1-112-320-51	s	CAP, ELECT 220MF
C29	1-112-319-11	s	CAP, ELECT 4700MF
C30	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C34	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C35	1-165-811-91	s	CAP, CHIP CERAMIC 22MF B 4532
C38	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C39	1-107-826-91	s	CAP, CHIP CERAMIC 100000PF B
CN1	1-770-678-21	o	CONNECTOR, BOARD TO BOARD 50P
CN2	1-816-296-21	s	PIN, CONNECTOR (PC BOARD) 9P
CN3	1-770-470-21	o	PIN, CONNECTOR (PC BOARD) 6P
CN4	1-770-469-21	o	PIN, CONNECTOR (PC BOARD) 2P
CN5	1-794-519-21	s	PIN, CONNECTOR (PC BOARD) 14P
CN6	1-779-804-21	s	CONNECTOR, BOARD TO BOARD 30P
D1	8-719-421-68	s	DIODE MA132WK-TX
D2	8-719-157-61	s	DIODE RD15M-T1B
D3	8-719-421-68	s	DIODE MA132WK-TX
D4	8-719-421-68	s	DIODE MA132WK-TX
D5	8-719-017-11	s	DIODE 02DZ6.8-TPH3
D8	8-719-421-68	s	DIODE MA132WK-TX
D10	8-719-421-68	s	DIODE MA132WK-TX
D11	8-719-938-77	s	DIODE SB05-05C-TB-E
D12	8-719-421-72	s	DIODE MA132WA-TX
FB1	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB3	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB4	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB5	1-414-772-21	s	FERRITE. EMI (SMD) (2012)
FB6	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB7	1-414-772-21	s	FERRITE. EMI (SMD) (2012)
IC1	8-749-018-23	s	IC LT1764EQ-E2
IC2	6-704-976-01	s	IC ADR381ARTZ-REEL7
IC3	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC4	8-759-338-95	s	IC NJM2903V(TE2)

(CNB-18 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC5	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC6	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC7	8-759-144-72	s	IC UPC358G2-E2
IC8	8-759-338-95	s	IC NJM2903V(TE2)
IC9	6-706-489-01	s	IC TC7SH32FU(T5RSOYJF)
IC10	8-759-653-03	s	IC NJM78M05DL1A-TE1
IC11	8-759-588-01	s	IC LTC1473CGN-E2
L1	1-414-854-41	s	INDUCTOR (SMD) 1000.0UH
L2	1-416-919-21	s	COIL, CHOKE 150UH
Q1	8-729-024-44	s	TRANSISTOR 2SK2315TYTR
Q2	8-729-041-24	s	TRANSISTOR NDS355AN
Q3	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q4	8-729-041-24	s	TRANSISTOR NDS355AN
Q5	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q6	8-729-048-79	s	TRANSISTOR SI4466DY-T1
Q7	6-550-697-01	s	TRANSISTOR HAT2164H-EL-E
Q8	6-550-697-01	s	TRANSISTOR HAT2164H-EL-E
Q9	6-550-697-01	s	TRANSISTOR HAT2164H-EL-E
Q10	6-550-697-01	s	TRANSISTOR HAT2164H-EL-E
Q11	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q12	6-550-697-01	s	TRANSISTOR HAT2164H-EL-E
Q13	6-550-697-01	s	TRANSISTOR HAT2164H-EL-E
Q14	6-550-697-01	s	TRANSISTOR HAT2164H-EL-E
Q15	6-550-697-01	s	TRANSISTOR HAT2164H-EL-E
Q16	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q17	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q18	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q19	8-729-140-64	s	TRANSISTOR 2SA1611T1-M5M6
Q20	6-551-286-01	s	TRANSISTOR SI6943BDQ-T1
Q23	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q24	8-729-928-82	s	TRANSISTOR DTC144EE-TL
R1	1-208-935-81	s	RES, CHIP 100K (1005)
R2	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3	1-208-935-81	s	RES, CHIP 100K (1005)
R4	1-208-919-81	s	RES, CHIP 22K (1005)
R5	1-208-903-81	s	RES, CHIP 4.7K (1005)
R6	1-208-911-81	s	RES, CHIP 10K (1005)
R7	1-208-903-81	s	RES, CHIP 4.7K (1005)
R8	1-208-887-81	s	RES, CHIP 1.0K (1005)
R9	1-208-943-81	s	RES, CHIP 220K (1005)
R10	1-208-935-81	s	RES, CHIP 100K (1005)
R11	1-208-935-81	s	RES, CHIP 100K (1005)
R12	1-208-943-81	s	RES, CHIP 220K (1005)
R13	1-208-935-81	s	RES, CHIP 100K (1005)
R14	1-208-935-81	s	RES, CHIP 100K (1005)
R15	1-208-911-81	s	RES, CHIP 10K (1005)
R16	1-208-935-81	s	RES, CHIP 100K (1005)
R19	1-208-927-81	s	RES, CHIP 47K (1005)
R22	1-208-927-81	s	RES, CHIP 47K (1005)
R23	1-208-927-81	s	RES, CHIP 47K (1005)
R24	1-208-935-81	s	RES, CHIP 100K (1005)
R25	1-208-943-81	s	RES, CHIP 220K (1005)
R26	1-208-943-81	s	RES, CHIP 220K (1005)
R27	1-208-935-81	s	RES, CHIP 100K (1005)
R28	1-208-959-81	s	RES, CHIP 1M (1005)
R29	1-208-927-81	s	RES, CHIP 47K (1005)
R30	1-208-927-81	s	RES, CHIP 47K (1005)

(CNB-18 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R31	1-208-887-81	s	RES, CHIP 1.0K (1005)
R32	1-208-927-81	s	RES, CHIP 47K (1005)
R33	1-208-919-81	s	RES, CHIP 22K (1005)
R34	1-208-887-81	s	RES, CHIP 1.0K (1005)
R35	1-208-911-81	s	RES, CHIP 10K (1005)
R36	1-208-935-81	s	RES, CHIP 100K (1005)
R37	1-208-927-81	s	RES, CHIP 47K (1005)
R38	1-208-887-81	s	RES, CHIP 1.0K (1005)
R39	1-208-887-81	s	RES, CHIP 1.0K (1005)
R44	1-208-887-81	s	RES, CHIP 1.0K (1005)
R46	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R48	1-208-919-81	s	RES, CHIP 22K (1005)
R49	1-208-887-81	s	RES, CHIP 1.0K (1005)
R50	1-208-879-81	s	RES, CHIP 470 (1005)
R51	1-219-611-21	s	RES, CHIP (SQUARE TYPE) 0.047
R52	1-219-611-21	s	RES, CHIP (SQUARE TYPE) 0.047
R53	1-219-611-21	s	RES, CHIP (SQUARE TYPE) 0.047
R54	1-208-903-81	s	RES, CHIP 4.7K (1005)
R55	1-208-935-81	s	RES, CHIP 100K (1005)
R56	1-208-911-81	s	RES, CHIP 10K (1005)
R57	1-208-903-81	s	RES, CHIP 4.7K (1005)
R58	1-208-887-81	s	RES, CHIP 1.0K (1005)
R59	1-220-250-91	s	RES, SQUARE TYPE CHIP 10(4532)
R60	1-220-250-91	s	RES, SQUARE TYPE CHIP 10(4532)
R61	1-208-935-81	s	RES, CHIP 100K (1005)
R65	1-208-959-81	s	RES, CHIP 1M (1005)
R66	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R67	1-208-887-81	s	RES, CHIP 1.0K (1005)
THP1	⚠ 1-803-615-21	s	THERMISTOR, POSITIVE

DCP-37 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1169-365-A	s	MOUNTED CIRCUIT BOARD, DCP-37
3pcs	3-855-938-01	s	SCREW
1pc	6-703-421-01	s	IC HD64F7145F50
C1	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C5	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C6	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C7	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C8	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C9	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C10	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C11	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C12	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C13	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C14	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C15	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C16	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C17	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C18	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C19	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C20	1-100-620-91	s	CAP, CHIP CERAMIC 47MF B(3225)
C22	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C23	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C24	1-100-352-91	s	CAP, CERAMIC 1MF C (1608)
C25	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C26	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C27	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C28	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C29	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C30	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C32	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C33	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C34	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C35	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C38	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C39	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C40	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C41	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C42	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C43	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C44	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C45	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C46	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C47	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C48	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C49	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C50	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C51	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C52	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C53	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C54	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C55	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C56	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C57	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C58	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C59	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)

(DCP-37 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C60	1-100-620-91	s	CAP, CHIP CERAMIC 47MF B(3225)
C61	1-100-620-91	s	CAP, CHIP CERAMIC 47MF B(3225)
C64	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C65	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C66	1-100-352-91	s	CAP, CERAMIC 1MF C (1608)
C67	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C68	1-100-352-91	s	CAP, CERAMIC 1MF C (1608)
C69	1-208-907-81	s	RES, CHIP 6.8K (1005)
C70	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C71	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C72	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C73	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C74	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C75	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C76	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C77	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C78	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C79	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C81	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C83	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C84	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C85	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C86	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C87	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C88	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C89	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C94	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C95	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C96	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C97	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C98	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C99	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C100	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C101	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C102	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C103	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C104	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C106	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C107	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C108	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C109	1-165-872-21	s	CAP, ELECT 47MF (5.0X6.5)
C110	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C111	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C112	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C113	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C114	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C115	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C117	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C118	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C120	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C121	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C123	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C124	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C125	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C126	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C127	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C128	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C129	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C130	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(DCP-37 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C131	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C132	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C133	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C134	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C135	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C136	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C137	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C138	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C139	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C140	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C141	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C142	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C143	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C144	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C145	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C146	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C148	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C149	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C150	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C151	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C171	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C202	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C203	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C204	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C205	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C206	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C207	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C208	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C209	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C213	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C214	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C215	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C216	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C217	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C218	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C219	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C220	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C221	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C222	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C223	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C224	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C225	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C226	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C227	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C228	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C229	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C232	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C238	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C240	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C241	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C242	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C243	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C245	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C246	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C261	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C262	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C265	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C268	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C269	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(DCP-37 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C270	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C271	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C272	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C273	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C274	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C275	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C276	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C277	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C278	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C279	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C280	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C281	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C283	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C284	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C286	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C287	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C288	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C289	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C290	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C291	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C370	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C371	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C372	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C373	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C374	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C377	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C378	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C400	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C401	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C402	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C403	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C404	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C405	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C406	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C407	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C408	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C409	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C410	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C411	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C412	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C414	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C416	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C417	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C418	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C419	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C420	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C421	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C422	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C423	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C424	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C425	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C426	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C427	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C428	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C429	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C430	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C431	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C433	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C434	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(DCP-37 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C435	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C436	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C437	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C438	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C439	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C440	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C441	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C442	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C443	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C444	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C445	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C446	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C447	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C448	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C449	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C450	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C451	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C452	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C453	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C454	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C455	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C456	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C457	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C458	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C459	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C460	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C461	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C462	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C463	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C464	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C465	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C466	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C467	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C468	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C469	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C470	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C471	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C472	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C473	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C474	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C475	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C476	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C477	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C478	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C479	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C480	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C481	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C482	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C483	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C484	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C485	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C486	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C487	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C488	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C489	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C490	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C491	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C492	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C493	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(DCP-37 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C494	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C495	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C496	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C497	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C498	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C499	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C501	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C502	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C503	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C504	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C505	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C506	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C507	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C509	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C510	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C513	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C514	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C515	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C516	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C517	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C518	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C519	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C520	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C521	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C528	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C540	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C541	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C542	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C543	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C600	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C601	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C602	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C603	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C604	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C605	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C606	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C607	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C608	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C609	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C610	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C611	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C612	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C613	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C614	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C615	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C616	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C617	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C618	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C619	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C620	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C621	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C622	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C623	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C624	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C625	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C626	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C627	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C628	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C629	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(DCP-37 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C630	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C631	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C632	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C633	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C634	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C635	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C636	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C637	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C638	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C641	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C642	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C643	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C644	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C645	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C648	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C649	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C652	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C653	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C654	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C655	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C656	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C657	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C658	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C659	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C660	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C661	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C662	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C663	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C664	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C665	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C666	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C667	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C668	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C669	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C670	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C671	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C672	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C673	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C674	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C675	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C676	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C677	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C678	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C679	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C680	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C681	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C682	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C683	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C684	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C685	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C686	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C687	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C688	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C689	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C690	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C691	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C692	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C693	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C694	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(DCP-37 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C695	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C696	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C697	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C699	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C701	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C702	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C703	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C704	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C705	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C706	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C707	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C708	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C709	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C710	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C711	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C712	1-164-882-81	s	CAP,CHIP CERAMIC 220PF CH 1005
C713	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C740	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C741	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C742	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C743	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C744	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C745	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C746	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C747	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C748	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C749	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C750	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C751	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C752	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C753	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C754	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C755	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C756	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C757	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C758	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C759	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C760	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C761	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C762	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C763	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C764	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C765	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C766	1-127-956-21	s	CAP, CHIP FILM 0.1MF (3225)
C767	1-107-826-91	s	CAP, CHIP CERAMIC 100000PF B
C768	1-107-826-91	s	CAP, CHIP CERAMIC 100000PF B
C771	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C772	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C773	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C774	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C775	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C776	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C777	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C778	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C779	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C780	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C781	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C782	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C784	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(DCP-37 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C785	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C786	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C787	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C788	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C789	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C790	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C791	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C792	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C793	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C794	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C795	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C796	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C800	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C801	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C802	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C803	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C804	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C805	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C806	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C807	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C808	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C809	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C810	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C811	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C812	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C813	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C814	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C815	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C816	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C817	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C818	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C819	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C820	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C821	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C822	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C823	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C824	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C825	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C826	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C827	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C828	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C829	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C830	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C831	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C832	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C833	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C834	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C835	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C836	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C837	1-128-589-21	s	CAP, CHIP ELECT 47MF
C838	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C839	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C840	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C841	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C843	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C844	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C845	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C846	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C847	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(DCP-37 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C848	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C849	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C850	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C851	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C852	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C853	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C854	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C855	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C856	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C857	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C858	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C859	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C860	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C861	1-128-589-21	s	CAP, CHIP ELECT 47MF
C862	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C863	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C864	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C865	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C866	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C867	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C868	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C869	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C870	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C871	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C872	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C873	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C874	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C875	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C876	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C877	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C878	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C879	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C880	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C881	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C882	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C883	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C884	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C885	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C886	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C887	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C888	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C889	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C890	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C892	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C893	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C894	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C896	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C897	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C898	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C900	1-137-897-21	s	CAP, ELECT 150MF (6.3X6)
C901	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C902	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C903	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C906	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C907	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C908	1-127-956-21	s	CAP, CHIP FILM 0.1MF (3225)
C909	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C910	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C911	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(DCP-37 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C912	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C913	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C914	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C915	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C916	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C917	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C918	1-127-956-21	s	CAP, CHIP FILM 0.1MF (3225)
C919	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C920	1-165-872-21	s	CAP, ELECT 47MF (5.0X6.5)
C921	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C922	1-127-956-21	s	CAP, CHIP FILM 0.1MF (3225)
C923	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C924	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C925	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C926	1-127-956-21	s	CAP, CHIP FILM 0.1MF (3225)
C927	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C928	1-137-897-21	s	CAP, ELECT 150MF (6.3X6)
C929	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C930	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C931	1-127-956-21	s	CAP, CHIP FILM 0.1MF (3225)
C932	1-127-956-21	s	CAP, CHIP FILM 0.1MF (3225)
C933	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C936	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C937	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C938	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C939	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C940	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C941	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C942	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C943	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C944	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C945	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C946	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C948	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C949	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C950	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C952	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C954	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C955	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C957	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C959	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C962	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C963	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C964	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C970	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C971	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C972	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
CN3	1-778-535-31	s	CONNECTOR, FFC/FPC(ZIF) AN 45P
CN6	1-580-057-21	s	PIN, CONNECTOR (SMD) 4P
CN11	1-818-579-91	s	CONNECTOR, BOARD TO BOARD(60P)
CN24	1-764-094-21	o	PIN, CONNECTOR (PC BOARD) 9P
CN402	1-766-382-21	s	PIN, CONNECTOR (1.5MM)(SMD)10P
CN403	1-573-290-21	s	PIN, CONNECTOR (1.5MM) (SMD)4P
CN601	1-784-254-21	s	CONNECTOR 10P
D370	8-719-421-68	s	DIODE MA132WK-TX
D400	8-719-421-72	s	DIODE MA132WA-TX
D401	8-719-421-72	s	DIODE MA132WA-TX
D402	8-719-421-72	s	DIODE MA132WA-TX

(DCP-37 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
D403	8-719-421-68	s	DIODE MA132WK-TX
D404	8-719-938-77	s	DIODE SB05-05C-TB-E
D600	8-719-074-31	s	DIODE CL-196YG-CD-T
D601	8-719-074-31	s	DIODE CL-196YG-CD-T
D602	8-719-074-31	s	DIODE CL-196YG-CD-T
D603	8-719-074-31	s	DIODE CL-196YG-CD-T
E1	1-535-877-22	s	CHIP, CHECKER
E2	1-535-877-22	s	CHIP, CHECKER
E3	1-535-877-22	s	CHIP, CHECKER
E4	1-535-877-22	s	CHIP, CHECKER
E6	1-535-877-22	s	CHIP, CHECKER
E7	1-535-877-22	s	CHIP, CHECKER
E9	1-535-877-22	s	CHIP, CHECKER
E10	1-535-877-22	s	CHIP, CHECKER
E11	1-535-877-22	s	CHIP, CHECKER
E12	1-535-877-22	s	CHIP, CHECKER
FB400	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB401	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FL2	1-234-871-11	s	FILTER, LOW PASS
FL3	1-234-871-11	s	FILTER, LOW PASS
FL4	1-234-871-11	s	FILTER, LOW PASS
IC3	8-759-672-76	s	IC AK9813BF-E2
IC4	8-759-672-76	s	IC AK9813BF-E2
IC5	6-706-357-01	s	IC LTC1664IGN#TR
IC6	8-759-327-01	s	IC NJM062V(TE2)
IC7	6-706-478-01	s	IC TC7SET08FU(T5RSOJF)
IC8	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC9	8-759-663-35	s	IC 74VHC4053MTCX
IC10	8-753-261-02	s	IC CXA3648AR-T4
IC11	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC12	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC13	8-753-261-02	s	IC CXA3648AR-T4
IC14	8-753-261-02	s	IC CXA3648AR-T4
IC15	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC16	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC17	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC18	6-709-150-01	s	IC LTC2228CUH#TR
IC19	6-709-150-01	s	IC LTC2228CUH#TR
IC20	6-709-150-01	s	IC LTC2228CUH#TR
IC21	8-759-327-01	s	IC NJM062V(TE2)
IC22	8-759-327-01	s	IC NJM062V(TE2)
IC24	6-701-989-01	s	IC SN74LVC126APWR
IC25	6-700-831-01	s	IC TC7WZ74FK(TE85R)
IC26	6-706-088-01	s	IC UPD6467GR-560-E2
IC27	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC28	8-759-592-44	s	IC TC7SZ04FU(TE85R)
IC201	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC202	8-759-564-49	s	IC TC7W53FU(TE12R)
IC203	6-704-646-01	s	IC ADV7310KST
IC204	6-704-646-01	s	IC ADV7310KST
IC216	6-704-646-01	s	IC ADV7310KST
IC224	6-705-409-01	s	IC SN74AHC1G66HDCK3
IC227	6-705-409-01	s	IC SN74AHC1G66HDCK3
IC228	6-706-478-01	s	IC TC7SET08FU(T5RSOJF)
IC230	6-705-409-01	s	IC SN74AHC1G66HDCK3
IC231	6-705-409-01	s	IC SN74AHC1G66HDCK3
IC370	8-759-327-01	s	IC NJM062V(TE2)

(DCP-37 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC371	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC375	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC400	6-704-099-01	s	IC TC7WZ08FK(TE85R)
IC401	6-702-319-01	s	IC TC7WZ04FK(TE85R)
IC402	8-759-594-17	o	IC CXD9093R
IC404	8-759-592-48	s	IC TC7SZ32FU(TE85R)
IC405	8-759-546-74	s	IC TC7WH157FU(TE12R)
IC406	8-759-546-74	s	IC TC7WH157FU(TE12R)
IC407	8-759-592-48	s	IC TC7SZ32FU(TE85R)
IC408	8-759-546-74	s	IC TC7WH157FU(TE12R)
IC411	8-759-564-49	s	IC TC7W53FU(TE12R)
IC412	6-600-060-01	s	IC TC7WZ32FK(TE85R)
IC413	6-705-514-01	s	IC MAX3222IPWR
IC415	8-759-656-54	s	IC TC7WH14FK(TE85R)
IC416	8-759-346-27	s	IC LM45BIM3X
IC417	6-701-905-01	s	IC AM26C31CDBR
IC418	8-759-327-01	s	IC NJM062V(TE2)
IC419	8-759-564-49	s	IC TC7W53FU(TE12R)
IC420	8-759-663-35	s	IC 74VHC4053MTCX
IC421	8-759-327-01	s	IC NJM062V(TE2)
IC422	6-706-476-01	s	IC TC7SET04FU(T5RSOJF)
IC423	6-705-870-01	s	IC CAT24WC32WI-TE13
IC424	8-759-592-44	s	IC TC7SZ04FU(TE85R)
IC426	8-759-656-54	s	IC TC7WH14FK(TE85R)
IC428	6-704-099-01	s	IC TC7WZ08FK(TE85R)
IC429	8-759-591-61	s	IC TC7WHU04FU(TE12R)
IC430	8-759-683-24	s	IC MAX821RUS+TG069
IC431	6-700-831-01	s	IC TC7WZ74FK(TE85R)
IC433	6-600-060-01	s	IC TC7WZ32FK(TE85R)
IC434	8-759-564-49	s	IC TC7W53FU(TE12R)
IC435	6-704-099-01	s	IC TC7WZ08FK(TE85R)
IC438	6-704-099-01	s	IC TC7WZ08FK(TE85R)
IC439	6-709-166-01	s	IC M5M5W816TP-55HI
IC440	6-709-166-01	s	IC M5M5W816TP-55HI
IC441	8-759-669-43	s	IC SN74LVC157APWR-12
IC442	6-704-988-01	s	IC FM18L08-70-STR
IC443	6-704-988-01	s	IC FM18L08-70-STR
IC444	6-704-099-01	s	IC TC7WZ08FK(TE85R)
IC445	6-704-099-01	s	IC TC7WZ08FK(TE85R)
IC446	8-759-592-48	s	IC TC7SZ32FU(TE85R)
IC462	8-759-327-01	s	IC NJM062V(TE2)
IC463	8-759-327-01	s	IC NJM062V(TE2)
IC470	6-700-831-01	s	IC TC7WZ74FK(TE85R)
IC500	8-759-392-77	s	IC SN74LVC245APWR
IC502	8-759-392-77	s	IC SN74LVC245APWR
IC503	6-704-099-01	s	IC TC7WZ08FK(TE85R)
IC505	8-759-669-42	s	IC SN74LVC138APWR-12
IC506	8-759-825-66	s	IC SN74LVC139APWR
IC507	8-759-825-66	s	IC SN74LVC139APWR
IC508	8-759-669-44	s	IC SN74LVC74APWR-12
IC509	8-752-392-03	s	IC CXD1095BR
IC510	8-759-656-54	s	IC TC7WH14FK(TE85R)
IC511	6-702-948-01	s	IC SN74AUC1G08DCKR
IC512	6-600-060-01	s	IC TC7WZ32FK(TE85R)
IC513	6-600-060-01	s	IC TC7WZ32FK(TE85R)
IC514	8-752-392-03	s	IC CXD1095BR
IC515	8-752-392-03	s	IC CXD1095BR
IC516	6-706-088-01	s	IC UPD6467GR-560-E2
IC517	8-759-392-77	s	IC SN74LVC245APWR

(DCP-37 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC524	8-759-392-77	s	IC SN74LVC245APWR
IC535	8-759-592-48	s	IC TC7SZ32FU(TE85R)
IC536	8-759-392-77	s	IC SN74LVC245APWR
IC541	8-759-592-48	s	IC TC7SZ32FU(TE85R)
IC542	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC601	6-704-099-01	s	IC TC7WZ08FK(TE85R)
IC602	6-704-099-01	s	IC TC7WZ08FK(TE85R)
IC603	8-759-398-57	s	IC LM1881MX NOPB
IC605	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC606	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC607	6-706-478-01	s	IC TC7SET08FU(T5RSOJF)
IC610	6-706-478-01	s	IC TC7SET08FU(T5RSOJF)
IC612	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC613	6-701-453-01	s	IC SN75207BNSR
IC614	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC615	8-759-549-15	s	IC SN74LV245APWR
IC616	8-759-392-77	s	IC SN74LVC245APWR
IC617	8-759-392-77	s	IC SN74LVC245APWR
IC618	8-759-669-78	s	IC TLC2933IPWR-12
IC619	8-759-669-78	s	IC TLC2933IPWR-12
IC620	8-759-669-78	s	IC TLC2933IPWR-12
IC621	6-706-478-01	s	IC TC7SET08FU(T5RSOJF)
IC622	6-706-478-01	s	IC TC7SET08FU(T5RSOJF)
IC623	8-759-663-35	s	IC 74VHC4053MTCX
IC624	8-759-327-01	s	IC NJM062V(TE2)
IC625	8-759-327-01	s	IC NJM062V(TE2)
IC626	8-759-592-44	s	IC TC7SZ04FU(TE85R)
IC627	6-704-099-01	s	IC TC7WZ08FK(TE85R)
IC628	6-704-099-01	s	IC TC7WZ08FK(TE85R)
IC629	8-759-669-41	s	IC SN74LVC125APWR-12
IC630	8-759-689-09	s	IC SN65LVDT2DBVR
IC631	6-704-965-01	s	IC PLL1705DBQR
IC632	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC634	8-759-592-48	s	IC TC7SZ32FU(TE85R)
IC635	8-759-592-44	s	IC TC7SZ04FU(TE85R)
IC636	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC639	6-704-099-01	s	IC TC7WZ08FK(TE85R)
IC640	8-759-669-43	s	IC SN74LVC157APWR-12
IC641	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC642	8-759-592-48	s	IC TC7SZ32FU(TE85R)
IC740	8-759-585-28	s	IC CY62256VLL-70ZXC-T2
IC742	8-759-669-67	s	IC TL074CPWR-12
IC744	8-759-669-67	s	IC TL074CPWR-12
IC745	6-707-885-01	s	IC TC74VHCT08AFT(EKJ)
IC746	6-707-885-01	s	IC TC74VHCT08AFT(EKJ)
IC747	6-706-478-01	s	IC TC7SET08FU(T5RSOJF)
IC748	6-706-358-01	s	IC AD5424YCPZ-REEL7
IC758	8-759-596-34	s	IC SN74LV4053APWR
IC759	8-759-596-34	s	IC SN74LV4053APWR
IC760	8-759-596-34	s	IC SN74LV4053APWR
IC761	8-759-592-48	s	IC TC7SZ32FU(TE85R)
IC762	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC763	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC764	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC765	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC804	8-759-592-44	s	IC TC7SZ04FU(TE85R)
IC901	8-759-327-01	s	IC NJM062V(TE2)
IC902	8-759-327-01	s	IC NJM062V(TE2)
IC904	8-759-327-01	s	IC NJM062V(TE2)

(DCP-37 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC905	8-759-694-36	s	IC SN74CBTLV3257PWR
IC907	6-704-976-01	s	IC ADR381ARTZ-REEL7
IC908	8-759-584-32	s	IC MB86189PFV-G-BND-ER-E1
IC909	8-759-680-48	s	IC TC7WH157FK(TE85R)
IC910	8-759-656-54	s	IC TC7WH14FK(TE85R)
IC911	8-759-592-48	s	IC TC7SZ32FU(TE85R)
IC912	6-704-099-01	s	IC TC7WZ08FK(TE85R)
IC913	6-704-099-01	s	IC TC7WZ08FK(TE85R)
IC914	6-702-319-01	s	IC TC7WZ04FK(TE85R)
L2	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L3	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L4	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L5	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L7	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L200	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L202	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L203	1-412-943-21	s	INDUCTOR 2.2UH (2520)
L206	1-412-943-21	s	INDUCTOR 2.2UH (2520)
L207	1-412-947-21	s	INDUCTOR 4.7UH (2520)
L209	1-412-947-21	s	INDUCTOR 4.7UH (2520)
L401	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L402	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L403	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L404	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L600	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L601	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L602	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L603	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L605	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L606	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L607	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L608	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L740	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L741	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L742	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L801	1-419-630-21	s	COIL, CHOKE 4.7UH
L802	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L803	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L804	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L900	1-419-630-21	s	COIL, CHOKE 4.7UH
L901	1-419-630-21	s	COIL, CHOKE 4.7UH
L902	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L903	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L904	1-419-630-21	s	COIL, CHOKE 4.7UH
L908	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L950	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L951	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
PH400	8-749-014-35	s	IC HCPL-0630-500
Q1	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q200	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q201	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q202	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q206	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q207	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q208	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q209	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q370	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q402	8-729-928-82	s	TRANSISTOR DTC144EE-TL

(DCP-37 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
Q403	8-729-209-73	s	TRANSISTOR 2SA1213Y-TE12L
Q404	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q405	8-729-041-23	s	TRANSISTOR NDS356AP
Q406	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q407	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q408	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q409	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q500	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q601	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q603	8-729-044-07	f	TRANSISTOR SI3443DV-T1
Q604	8-729-044-07	f	TRANSISTOR SI3443DV-T1
Q751	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q752	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q900	8-729-209-73	s	TRANSISTOR 2SA1213Y-TE12L
Q901	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q902	8-729-209-77	s	TRANSISTOR 2SC2873Y-TE12L
Q903	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q904	8-729-209-73	s	TRANSISTOR 2SA1213Y-TE12L
Q905	8-729-209-73	s	TRANSISTOR 2SA1213Y-TE12L
Q906	8-729-209-73	s	TRANSISTOR 2SA1213Y-TE12L
Q907	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
R1	1-208-915-81	s	RES, CHIP 15K (1005)
R2	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R9	1-208-895-81	s	RES, CHIP 2.2K (1005)
R10	1-208-911-81	s	RES, CHIP 10K (1005)
R11	1-208-907-81	s	RES, CHIP 6.8K (1005)
R12	1-208-879-81	s	RES, CHIP 470 (1005)
R13	1-208-911-81	s	RES, CHIP 10K (1005)
R14	1-208-903-81	s	RES, CHIP 4.7K (1005)
R15	1-208-911-81	s	RES, CHIP 10K (1005)
R16	1-220-870-81	s	RES, CHIP 10 (1005)
R17	1-208-863-81	s	RES, CHIP 100 (1005)
R18	1-208-903-81	s	RES, CHIP 4.7K (1005)
R19	1-208-887-81	s	RES, CHIP 1.0K (1005)
R20	1-208-959-81	s	RES, CHIP 1M (1005)
R21	1-208-863-81	s	RES, CHIP 100 (1005)
R23	1-208-879-81	s	RES, CHIP 470 (1005)
R24	1-208-899-81	s	RES, CHIP 3.3K (1005)
R25	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R27	1-208-879-81	s	RES, CHIP 470 (1005)
R28	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R29	1-208-887-81	s	RES, CHIP 1.0K (1005)
R30	1-208-887-81	s	RES, CHIP 1.0K (1005)
R31	1-208-887-81	s	RES, CHIP 1.0K (1005)
R32	1-208-887-81	s	RES, CHIP 1.0K (1005)
R33	1-208-919-81	s	RES, CHIP 22K (1005)
R35	1-208-911-81	s	RES, CHIP 10K (1005)
R39	1-208-911-81	s	RES, CHIP 10K (1005)
R40	1-208-911-81	s	RES, CHIP 10K (1005)
R41	1-208-911-81	s	RES, CHIP 10K (1005)
R42	1-208-919-81	s	RES, CHIP 22K (1005)
R43	1-208-911-81	s	RES, CHIP 10K (1005)
R44	1-208-911-81	s	RES, CHIP 10K (1005)
R45	1-208-887-81	s	RES, CHIP 1.0K (1005)
R46	1-208-887-81	s	RES, CHIP 1.0K (1005)
R49	1-208-879-81	s	RES, CHIP 470 (1005)

(DCP-37 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R50	1-208-879-81	s	RES, CHIP 470 (1005)
R51	1-208-899-81	s	RES, CHIP 3.3K (1005)
R52	1-208-899-81	s	RES, CHIP 3.3K (1005)
R53	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R54	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R57	1-208-879-81	s	RES, CHIP 470 (1005)
R58	1-208-879-81	s	RES, CHIP 470 (1005)
R59	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R60	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R61	1-208-887-81	s	RES, CHIP 1.0K (1005)
R62	1-208-887-81	s	RES, CHIP 1.0K (1005)
R63	1-208-887-81	s	RES, CHIP 1.0K (1005)
R64	1-208-887-81	s	RES, CHIP 1.0K (1005)
R65	1-208-887-81	s	RES, CHIP 1.0K (1005)
R66	1-208-887-81	s	RES, CHIP 1.0K (1005)
R67	1-208-887-81	s	RES, CHIP 1.0K (1005)
R68	1-208-887-81	s	RES, CHIP 1.0K (1005)
R69	1-208-919-81	s	RES, CHIP 22K (1005)
R71	1-208-919-81	s	RES, CHIP 22K (1005)
R73	1-208-911-81	s	RES, CHIP 10K (1005)
R74	1-208-911-81	s	RES, CHIP 10K (1005)
R85	1-208-895-81	s	RES, CHIP 2.2K (1005)
R86	1-208-887-81	s	RES, CHIP 1.0K (1005)
R87	1-208-903-81	s	RES, CHIP 4.7K (1005)
R88	1-208-887-81	s	RES, CHIP 1.0K (1005)
R89	1-208-895-81	s	RES, CHIP 2.2K (1005)
R90	1-208-887-81	s	RES, CHIP 1.0K (1005)
R91	1-208-911-81	s	RES, CHIP 10K (1005)
R92	1-208-907-81	s	RES, CHIP 6.8K (1005)
R93	1-208-911-81	s	RES, CHIP 10K (1005)
R94	1-208-907-81	s	RES, CHIP 6.8K (1005)
R95	1-208-911-81	s	RES, CHIP 10K (1005)
R96	1-208-907-81	s	RES, CHIP 6.8K (1005)
R97	1-208-895-81	s	RES, CHIP 2.2K (1005)
R98	1-208-935-81	s	RES, CHIP 100K (1005)
R99	1-208-895-81	s	RES, CHIP 2.2K (1005)
R100	1-208-935-81	s	RES, CHIP 100K (1005)
R101	1-208-895-81	s	RES, CHIP 2.2K (1005)
R102	1-208-935-81	s	RES, CHIP 100K (1005)
R103	1-208-879-81	s	RES, CHIP 470 (1005)
R104	1-208-879-81	s	RES, CHIP 470 (1005)
R105	1-208-879-81	s	RES, CHIP 470 (1005)
R106	1-208-887-81	s	RES, CHIP 1.0K (1005)
R108	1-208-887-81	s	RES, CHIP 1.0K (1005)
R110	1-208-887-81	s	RES, CHIP 1.0K (1005)
R112	1-208-875-81	s	RES, CHIP 330 (1005)
R113	1-208-875-81	s	RES, CHIP 330 (1005)
R115	1-208-875-81	s	RES, CHIP 330 (1005)
R116	1-220-878-81	s	RES, CHIP 22 (1005)
R117	1-220-878-81	s	RES, CHIP 22 (1005)
R118	1-220-878-81	s	RES, CHIP 22 (1005)
R119	1-220-878-81	s	RES, CHIP 22 (1005)
R120	1-220-878-81	s	RES, CHIP 22 (1005)
R121	1-208-863-81	s	RES, CHIP 100 (1005)
R122	1-208-863-81	s	RES, CHIP 100 (1005)
R123	1-208-863-81	s	RES, CHIP 100 (1005)
R124	1-208-863-81	s	RES, CHIP 100 (1005)
R125	1-208-863-81	s	RES, CHIP 100 (1005)
R126	1-208-863-81	s	RES, CHIP 100 (1005)

(DCP-37 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R127	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R128	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R129	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R130	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R131	1-208-911-81	s	RES, CHIP 10K (1005)
R132	1-208-911-81	s	RES, CHIP 10K (1005)
R133	1-208-911-81	s	RES, CHIP 10K (1005)
R134	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R146	1-208-911-81	s	RES, CHIP 10K (1005)
R147	1-208-911-81	s	RES, CHIP 10K (1005)
R148	1-208-919-81	s	RES, CHIP 22K (1005)
R149	1-208-919-81	s	RES, CHIP 22K (1005)
R150	1-208-919-81	s	RES, CHIP 22K (1005)
R151	1-220-878-81	s	RES, CHIP 22 (1005)
R152	1-208-863-81	s	RES, CHIP 100 (1005)
R153	1-208-879-81	s	RES, CHIP 470 (1005)
R154	1-208-879-81	s	RES, CHIP 470 (1005)
R155	1-208-895-81	s	RES, CHIP 2.2K (1005)
R156	1-208-895-81	s	RES, CHIP 2.2K (1005)
R162	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R171	1-208-855-81	s	RES, CHIP 47 (1005)
R172	1-208-855-81	s	RES, CHIP 47 (1005)
R173	1-208-855-81	s	RES, CHIP 47 (1005)
R174	1-208-855-81	s	RES, CHIP 47 (1005)
R191	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R192	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R193	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R194	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R195	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R196	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R197	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R198	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R199	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R200	1-208-911-81	s	RES, CHIP 10K (1005)
R201	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R202	1-208-855-81	s	RES, CHIP 47 (1005)
R203	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R204	1-208-935-81	s	RES, CHIP 100K (1005)
R205	1-208-935-81	s	RES, CHIP 100K (1005)
R206	1-208-855-81	s	RES, CHIP 47 (1005)
R207	1-208-935-81	s	RES, CHIP 100K (1005)
R208	1-208-855-81	s	RES, CHIP 47 (1005)
R209	1-208-935-81	s	RES, CHIP 100K (1005)
R210	1-208-855-81	s	RES, CHIP 47 (1005)
R211	1-208-895-81	s	RES, CHIP 2.2K (1005)
R212	1-208-895-81	s	RES, CHIP 2.2K (1005)
R213	1-208-895-81	s	RES, CHIP 2.2K (1005)
R214	1-208-887-81	s	RES, CHIP 1.0K (1005)
R215	1-208-903-81	s	RES, CHIP 4.7K (1005)
R216	1-208-887-81	s	RES, CHIP 1.0K (1005)
R217	1-208-903-81	s	RES, CHIP 4.7K (1005)
R218	1-208-887-81	s	RES, CHIP 1.0K (1005)
R219	1-208-903-81	s	RES, CHIP 4.7K (1005)
R220	1-208-883-81	s	RES, CHIP 680 (1005)
R221	1-208-883-81	s	RES, CHIP 680 (1005)
R222	1-208-895-81	s	RES, CHIP 2.2K (1005)
R223	1-208-887-81	s	RES, CHIP 1.0K (1005)
R224	1-208-903-81	s	RES, CHIP 4.7K (1005)
R225	1-208-899-81	s	RES, CHIP 3.3K (1005)

(DCP-37 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R226	1-208-899-81	s	RES, CHIP 3.3K (1005)
R228	1-208-899-81	s	RES, CHIP 3.3K (1005)
R229	1-208-899-81	s	RES, CHIP 3.3K (1005)
R230	1-208-899-81	s	RES, CHIP 3.3K (1005)
R231	1-208-875-81	s	RES, CHIP 330 (1005)
R233	1-208-875-81	s	RES, CHIP 330 (1005)
R234	1-208-875-81	s	RES, CHIP 330 (1005)
R235	1-208-875-81	s	RES, CHIP 330 (1005)
R236	1-208-875-81	s	RES, CHIP 330 (1005)
R240	1-220-878-81	s	RES, CHIP 22 (1005)
R242	1-220-878-81	s	RES, CHIP 22 (1005)
R243	1-220-878-81	s	RES, CHIP 22 (1005)
R256	1-208-911-81	s	RES, CHIP 10K (1005)
R258	1-208-903-81	s	RES, CHIP 4.7K (1005)
R259	1-208-911-81	s	RES, CHIP 10K (1005)
R262	1-208-860-81	s	RES, CHIP 75 (1005)
R263	1-208-860-81	s	RES, CHIP 75 (1005)
R266	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R269	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R270	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R276	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R277	1-220-878-81	s	RES, CHIP 22 (1005)
R278	1-208-903-81	s	RES, CHIP 4.7K (1005)
R285	1-208-899-81	s	RES, CHIP 3.3K (1005)
R287	1-208-875-81	s	RES, CHIP 330 (1005)
R288	1-208-855-81	s	RES, CHIP 47 (1005)
R289	1-220-878-81	s	RES, CHIP 22 (1005)
R290	1-208-860-81	s	RES, CHIP 75 (1005)
R291	1-220-878-81	s	RES, CHIP 22 (1005)
R292	1-220-878-81	s	RES, CHIP 22 (1005)
R293	1-208-903-81	s	RES, CHIP 4.7K (1005)
R294	1-208-903-81	s	RES, CHIP 4.7K (1005)
R296	1-220-878-81	s	RES, CHIP 22 (1005)
R297	1-208-903-81	s	RES, CHIP 4.7K (1005)
R299	1-208-855-81	s	RES, CHIP 47 (1005)
R300	1-208-935-81	s	RES, CHIP 100K (1005)
R306	1-208-895-81	s	RES, CHIP 2.2K (1005)
R307	1-208-895-81	s	RES, CHIP 2.2K (1005)
R310	1-208-887-81	s	RES, CHIP 1.0K (1005)
R311	1-208-903-81	s	RES, CHIP 4.7K (1005)
R312	1-208-887-81	s	RES, CHIP 1.0K (1005)
R313	1-208-903-81	s	RES, CHIP 4.7K (1005)
R314	1-208-883-81	s	RES, CHIP 680 (1005)
R328	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R329	1-208-871-81	s	RES, CHIP 220 (1005)
R330	1-208-871-81	s	RES, CHIP 220 (1005)
R331	1-208-871-81	s	RES, CHIP 220 (1005)
R350	1-220-870-81	s	RES, CHIP 10 (1005)
R351	1-220-870-81	s	RES, CHIP 10 (1005)
R352	1-208-863-81	s	RES, CHIP 100 (1005)
R353	1-208-863-81	s	RES, CHIP 100 (1005)
R354	1-208-927-81	s	RES, CHIP 47K (1005)
R356	1-220-870-81	s	RES, CHIP 10 (1005)
R357	1-208-863-81	s	RES, CHIP 100 (1005)
R359	1-208-855-81	s	RES, CHIP 47 (1005)
R362	1-208-860-81	s	RES, CHIP 75 (1005)
R363	1-208-863-81	s	RES, CHIP 100 (1005)
R371	1-208-923-81	s	RES, CHIP 33K (1005)
R372	1-208-959-81	s	RES, CHIP 1M (1005)

(DCP-37 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R373	1-208-887-81	s	RES, CHIP 1.0K (1005)
R374	1-208-899-81	s	RES, CHIP 3.3K (1005)
R375	1-208-919-81	s	RES, CHIP 22K (1005)
R376	1-208-923-81	s	RES, CHIP 33K (1005)
R377	1-208-923-81	s	RES, CHIP 33K (1005)
R378	1-208-895-81	s	RES, CHIP 2.2K (1005)
R379	1-208-959-81	s	RES, CHIP 1M (1005)
R380	1-208-911-81	s	RES, CHIP 10K (1005)
R381	1-208-927-81	s	RES, CHIP 47K (1005)
R382	1-208-887-81	s	RES, CHIP 1.0K (1005)
R383	1-208-891-81	s	RES, CHIP 1.5K (1005)
R384	1-208-903-81	s	RES, CHIP 4.7K (1005)
R385	1-208-903-81	s	RES, CHIP 4.7K (1005)
R386	1-208-887-81	s	RES, CHIP 1.0K (1005)
R387	1-208-891-81	s	RES, CHIP 1.5K (1005)
R388	1-208-860-81	s	RES, CHIP 75 (1005)
R400	1-208-863-81	s	RES, CHIP 100 (1005)
R401	1-208-863-81	s	RES, CHIP 100 (1005)
R402	1-208-943-81	s	RES, CHIP 220K (1005)
R403	1-208-911-81	s	RES, CHIP 10K (1005)
R404	1-208-911-81	s	RES, CHIP 10K (1005)
R405	1-208-911-81	s	RES, CHIP 10K (1005)
R408	1-208-855-81	s	RES, CHIP 47 (1005)
R410	1-208-863-81	s	RES, CHIP 100 (1005)
R411	1-208-863-81	s	RES, CHIP 100 (1005)
R412	1-220-870-81	s	RES, CHIP 10 (1005)
R413	1-208-935-81	s	RES, CHIP 100K (1005)
R414	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R415	1-208-863-81	s	RES, CHIP 100 (1005)
R416	1-208-927-81	s	RES, CHIP 47K (1005)
R417	1-208-919-81	s	RES, CHIP 22K (1005)
R418	1-208-895-81	s	RES, CHIP 2.2K (1005)
R419	1-208-911-81	s	RES, CHIP 10K (1005)
R420	1-208-927-81	s	RES, CHIP 47K (1005)
R421	1-220-870-81	s	RES, CHIP 10 (1005)
R423	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R425	1-220-870-81	s	RES, CHIP 10 (1005)
R426	1-220-870-81	s	RES, CHIP 10 (1005)
R427	1-220-870-81	s	RES, CHIP 10 (1005)
R428	1-208-927-81	s	RES, CHIP 47K (1005)
R429	1-208-927-81	s	RES, CHIP 47K (1005)
R431	1-208-863-81	s	RES, CHIP 100 (1005)
R432	1-208-935-81	s	RES, CHIP 100K (1005)
R433	1-208-927-81	s	RES, CHIP 47K (1005)
R434	1-208-935-81	s	RES, CHIP 100K (1005)
R435	1-208-927-81	s	RES, CHIP 47K (1005)
R436	1-208-911-81	s	RES, CHIP 10K (1005)
R437	1-208-935-81	s	RES, CHIP 100K (1005)
R438	1-208-935-81	s	RES, CHIP 100K (1005)
R439	1-208-927-81	s	RES, CHIP 47K (1005)
R440	1-220-878-81	s	RES, CHIP 22 (1005)
R442	1-208-915-81	s	RES, CHIP 15K (1005)
R443	1-208-903-81	s	RES, CHIP 4.7K (1005)
R444	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R446	1-208-935-81	s	RES, CHIP 100K (1005)
R447	1-208-927-81	s	RES, CHIP 47K (1005)
R448	1-208-927-81	s	RES, CHIP 47K (1005)
R449	1-208-887-81	s	RES, CHIP 1.0K (1005)
R450	1-208-887-81	s	RES, CHIP 1.0K (1005)

(DCP-37 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R451	1-208-887-81	s	RES, CHIP 1.0K (1005)
R452	1-208-935-81	s	RES, CHIP 100K (1005)
R454	1-208-935-81	s	RES, CHIP 100K (1005)
R455	1-208-863-81	s	RES, CHIP 100 (1005)
R456	1-208-863-81	s	RES, CHIP 100 (1005)
R457	1-208-863-81	s	RES, CHIP 100 (1005)
R458	1-208-887-81	s	RES, CHIP 1.0K (1005)
R459	1-208-907-81	s	RES, CHIP 6.8K (1005)
R460	1-208-907-81	s	RES, CHIP 6.8K (1005)
R461	1-208-935-81	s	RES, CHIP 100K (1005)
R462	1-208-863-81	s	RES, CHIP 100 (1005)
R463	1-208-935-81	s	RES, CHIP 100K (1005)
R464	1-208-863-81	s	RES, CHIP 100 (1005)
R465	1-208-863-81	s	RES, CHIP 100 (1005)
R466	1-208-887-81	s	RES, CHIP 1.0K (1005)
R467	1-208-895-81	s	RES, CHIP 2.2K (1005)
R468	1-208-935-81	s	RES, CHIP 100K (1005)
R469	1-208-911-81	s	RES, CHIP 10K (1005)
R470	1-208-935-81	s	RES, CHIP 100K (1005)
R471	1-208-887-81	s	RES, CHIP 1.0K (1005)
R472	1-208-887-81	s	RES, CHIP 1.0K (1005)
R473	1-208-899-81	s	RES, CHIP 3.3K (1005)
R474	1-208-927-81	s	RES, CHIP 47K (1005)
R475	1-208-855-81	s	RES, CHIP 47 (1005)
R476	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R477	1-208-871-81	s	RES, CHIP 220 (1005)
R478	1-208-911-81	s	RES, CHIP 10K (1005)
R479	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R480	1-208-919-81	s	RES, CHIP 22K (1005)
R481	1-208-935-81	s	RES, CHIP 100K (1005)
R482	1-208-935-81	s	RES, CHIP 100K (1005)
R483	1-208-855-81	s	RES, CHIP 47 (1005)
R484	1-208-855-81	s	RES, CHIP 47 (1005)
R485	1-208-863-81	s	RES, CHIP 100 (1005)
R486	1-220-870-81	s	RES, CHIP 10 (1005)
R488	1-208-887-81	s	RES, CHIP 1.0K (1005)
R490	1-208-863-81	s	RES, CHIP 100 (1005)
R491	1-208-863-81	s	RES, CHIP 100 (1005)
R492	1-208-935-81	s	RES, CHIP 100K (1005)
R493	1-208-863-81	s	RES, CHIP 100 (1005)
R494	1-208-863-81	s	RES, CHIP 100 (1005)
R495	1-208-863-81	s	RES, CHIP 100 (1005)
R496	1-208-887-81	s	RES, CHIP 1.0K (1005)
R497	1-208-935-81	s	RES, CHIP 100K (1005)
R498	1-208-903-81	s	RES, CHIP 4.7K (1005)
R500	1-208-935-81	s	RES, CHIP 100K (1005)
R501	1-208-863-81	s	RES, CHIP 100 (1005)
R502	1-208-855-81	s	RES, CHIP 47 (1005)
R503	1-208-863-81	s	RES, CHIP 100 (1005)
R505	1-208-863-81	s	RES, CHIP 100 (1005)
R506	1-220-870-81	s	RES, CHIP 10 (1005)
R507	1-208-863-81	s	RES, CHIP 100 (1005)
R508	1-208-863-81	s	RES, CHIP 100 (1005)
R509	1-208-919-81	s	RES, CHIP 22K (1005)
R512	1-208-863-81	s	RES, CHIP 100 (1005)
R513	1-208-863-81	s	RES, CHIP 100 (1005)
R517	1-208-863-81	s	RES, CHIP 100 (1005)
R527	1-208-887-81	s	RES, CHIP 1.0K (1005)
R528	1-208-887-81	s	RES, CHIP 1.0K (1005)

(DCP-37 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R529	1-208-887-81	s	RES, CHIP 1.0K (1005)
R537	1-208-863-81	s	RES, CHIP 100 (1005)
R538	1-208-903-81	s	RES, CHIP 4.7K (1005)
R539	1-208-903-81	s	RES, CHIP 4.7K (1005)
R540	1-208-863-81	s	RES, CHIP 100 (1005)
R541	1-208-863-81	s	RES, CHIP 100 (1005)
R542	1-208-863-81	s	RES, CHIP 100 (1005)
R543	1-208-935-81	s	RES, CHIP 100K (1005)
R544	1-208-863-81	s	RES, CHIP 100 (1005)
R600	1-208-863-81	s	RES, CHIP 100 (1005)
R601	1-208-863-81	s	RES, CHIP 100 (1005)
R603	1-208-863-81	s	RES, CHIP 100 (1005)
R604	1-208-911-81	s	RES, CHIP 10K (1005)
R605	1-208-911-81	s	RES, CHIP 10K (1005)
R606	1-208-911-81	s	RES, CHIP 10K (1005)
R607	1-208-911-81	s	RES, CHIP 10K (1005)
R608	1-208-911-81	s	RES, CHIP 10K (1005)
R609	1-208-887-81	s	RES, CHIP 1.0K (1005)
R610	1-208-887-81	s	RES, CHIP 1.0K (1005)
R611	1-208-955-81	s	RES, CHIP 680K (1005)
R614	1-208-860-81	s	RES, CHIP 75 (1005)
R615	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R616	1-208-887-81	s	RES, CHIP 1.0K (1005)
R617	1-208-887-81	s	RES, CHIP 1.0K (1005)
R618	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R622	1-208-895-81	s	RES, CHIP 2.2K (1005)
R625	1-208-911-81	s	RES, CHIP 10K (1005)
R626	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R627	1-208-955-81	s	RES, CHIP 680K (1005)
R628	1-220-878-81	s	RES, CHIP 22 (1005)
R630	1-208-887-81	s	RES, CHIP 1.0K (1005)
R631	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R632	1-208-899-81	s	RES, CHIP 3.3K (1005)
R633	1-208-871-81	s	RES, CHIP 220 (1005)
R636	1-208-879-81	s	RES, CHIP 470 (1005)
R637	1-208-879-81	s	RES, CHIP 470 (1005)
R638	1-208-879-81	s	RES, CHIP 470 (1005)
R639	1-208-911-81	s	RES, CHIP 10K (1005)
R640	1-208-911-81	s	RES, CHIP 10K (1005)
R641	1-208-911-81	s	RES, CHIP 10K (1005)
R642	1-208-919-81	s	RES, CHIP 22K (1005)
R643	1-208-919-81	s	RES, CHIP 22K (1005)
R644	1-208-863-81	s	RES, CHIP 100 (1005)
R645	1-220-870-81	s	RES, CHIP 10 (1005)
R646	1-208-911-81	s	RES, CHIP 10K (1005)
R647	1-208-911-81	s	RES, CHIP 10K (1005)
R648	1-208-855-81	s	RES, CHIP 47 (1005)
R649	1-208-855-81	s	RES, CHIP 47 (1005)
R650	1-208-855-81	s	RES, CHIP 47 (1005)
R651	1-208-855-81	s	RES, CHIP 47 (1005)
R652	1-208-855-81	s	RES, CHIP 47 (1005)
R653	1-208-855-81	s	RES, CHIP 47 (1005)
R654	1-208-855-81	s	RES, CHIP 47 (1005)
R656	1-208-855-81	s	RES, CHIP 47 (1005)
R657	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R658	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R659	1-208-855-81	s	RES, CHIP 47 (1005)
R660	1-220-870-81	s	RES, CHIP 10 (1005)
R662	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(DCP-37 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R663	1-208-855-81	s	RES, CHIP 47 (1005)
R664	1-208-855-81	s	RES, CHIP 47 (1005)
R665	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R666	1-208-863-81	s	RES, CHIP 100 (1005)
R667	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R668	1-208-935-81	s	RES, CHIP 100K (1005)
R669	1-208-935-81	s	RES, CHIP 100K (1005)
R670	1-208-935-81	s	RES, CHIP 100K (1005)
R671	1-208-935-81	s	RES, CHIP 100K (1005)
R672	1-208-935-81	s	RES, CHIP 100K (1005)
R673	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R675	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R677	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R679	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R681	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R682	1-208-871-81	s	RES, CHIP 220 (1005)
R683	1-208-855-81	s	RES, CHIP 47 (1005)
R685	1-208-879-81	s	RES, CHIP 470 (1005)
R686	1-208-879-81	s	RES, CHIP 470 (1005)
R687	1-208-879-81	s	RES, CHIP 470 (1005)
R691	1-208-919-81	s	RES, CHIP 22K (1005)
R692	1-208-911-81	s	RES, CHIP 10K (1005)
R693	1-208-919-81	s	RES, CHIP 22K (1005)
R694	1-208-911-81	s	RES, CHIP 10K (1005)
R695	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R731	1-208-895-81	s	RES, CHIP 2.2K (1005)
R732	1-208-895-81	s	RES, CHIP 2.2K (1005)
R733	1-208-895-81	s	RES, CHIP 2.2K (1005)
R734	1-208-895-81	s	RES, CHIP 2.2K (1005)
R735	1-208-895-81	s	RES, CHIP 2.2K (1005)
R736	1-208-895-81	s	RES, CHIP 2.2K (1005)
R737	1-208-871-81	s	RES, CHIP 220 (1005)
R738	1-208-871-81	s	RES, CHIP 220 (1005)
R739	1-208-871-81	s	RES, CHIP 220 (1005)
R744	1-208-895-81	s	RES, CHIP 2.2K (1005)
R745	1-208-895-81	s	RES, CHIP 2.2K (1005)
R746	1-208-895-81	s	RES, CHIP 2.2K (1005)
R747	1-208-879-81	s	RES, CHIP 470 (1005)
R748	1-208-879-81	s	RES, CHIP 470 (1005)
R749	1-208-879-81	s	RES, CHIP 470 (1005)
R750	1-220-870-81	s	RES, CHIP 10 (1005)
R751	1-208-887-81	s	RES, CHIP 1.0K (1005)
R752	1-208-860-81	s	RES, CHIP 75 (1005)
R753	1-208-860-81	s	RES, CHIP 75 (1005)
R754	1-208-860-81	s	RES, CHIP 75 (1005)
R755	1-208-871-81	s	RES, CHIP 220 (1005)
R756	1-208-860-81	s	RES, CHIP 75 (1005)
R757	1-208-860-81	s	RES, CHIP 75 (1005)
R758	1-208-860-81	s	RES, CHIP 75 (1005)
R759	1-208-911-81	s	RES, CHIP 10K (1005)
R760	1-208-911-81	s	RES, CHIP 10K (1005)
R761	1-208-919-81	s	RES, CHIP 22K (1005)
R762	1-208-911-81	s	RES, CHIP 10K (1005)
R764	1-220-878-81	s	RES, CHIP 22 (1005)
R765	1-208-911-81	s	RES, CHIP 10K (1005)
R766	1-208-919-81	s	RES, CHIP 22K (1005)
R767	1-208-903-81	s	RES, CHIP 4.7K (1005)
R768	1-220-878-81	s	RES, CHIP 22 (1005)
R769	1-220-870-81	s	RES, CHIP 10 (1005)

(DCP-37 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R770	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R771	1-208-887-81	s	RES, CHIP 1.0K (1005)
R773	1-208-903-81	s	RES, CHIP 4.7K (1005)
R774	1-208-903-81	s	RES, CHIP 4.7K (1005)
R775	1-208-903-81	s	RES, CHIP 4.7K (1005)
R776	1-208-903-81	s	RES, CHIP 4.7K (1005)
R777	1-208-903-81	s	RES, CHIP 4.7K (1005)
R778	1-208-903-81	s	RES, CHIP 4.7K (1005)
R779	1-208-895-81	s	RES, CHIP 2.2K (1005)
R780	1-208-895-81	s	RES, CHIP 2.2K (1005)
R781	1-208-895-81	s	RES, CHIP 2.2K (1005)
R782	1-208-871-81	s	RES, CHIP 220 (1005)
R783	1-208-871-81	s	RES, CHIP 220 (1005)
R784	1-208-871-81	s	RES, CHIP 220 (1005)
R785	1-208-903-81	s	RES, CHIP 4.7K (1005)
R786	1-208-903-81	s	RES, CHIP 4.7K (1005)
R787	1-208-903-81	s	RES, CHIP 4.7K (1005)
R788	1-208-887-81	s	RES, CHIP 1.0K (1005)
R789	1-208-887-81	s	RES, CHIP 1.0K (1005)
R790	1-208-887-81	s	RES, CHIP 1.0K (1005)
R791	1-208-891-81	s	RES, CHIP 1.5K (1005)
R792	1-208-891-81	s	RES, CHIP 1.5K (1005)
R793	1-208-891-81	s	RES, CHIP 1.5K (1005)
R794	1-208-855-81	s	RES, CHIP 47 (1005)
R795	1-208-855-81	s	RES, CHIP 47 (1005)
R796	1-208-855-81	s	RES, CHIP 47 (1005)
R797	1-208-895-81	s	RES, CHIP 2.2K (1005)
R798	1-208-879-81	s	RES, CHIP 470 (1005)
R803	1-220-878-81	s	RES, CHIP 22 (1005)
R805	1-208-863-81	s	RES, CHIP 100 (1005)
R901	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R902	1-208-887-81	s	RES, CHIP 1.0K (1005)
R903	1-208-919-81	s	RES, CHIP 22K (1005)
R904	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R905	1-208-879-81	s	RES, CHIP 470 (1005)
R906	1-208-903-81	s	RES, CHIP 4.7K (1005)
R907	1-208-919-81	s	RES, CHIP 22K (1005)
R908	1-208-887-81	s	RES, CHIP 1.0K (1005)
R909	1-208-927-81	s	RES, CHIP 47K (1005)
R910	1-208-895-81	s	RES, CHIP 2.2K (1005)
R911	1-208-919-81	s	RES, CHIP 22K (1005)
R912	1-208-919-81	s	RES, CHIP 22K (1005)
R913	1-208-887-81	s	RES, CHIP 1.0K (1005)
R914	1-208-887-81	s	RES, CHIP 1.0K (1005)
R916	1-208-887-81	s	RES, CHIP 1.0K (1005)
R918	1-208-887-81	s	RES, CHIP 1.0K (1005)
R920	1-208-911-81	s	RES, CHIP 10K (1005)
R921	1-208-911-81	s	RES, CHIP 10K (1005)
R922	1-220-870-81	s	RES, CHIP 10 (1005)
R923	1-208-903-81	s	RES, CHIP 4.7K (1005)
R924	1-208-919-81	s	RES, CHIP 22K (1005)
R929	1-208-863-81	s	RES, CHIP 100 (1005)
R930	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R931	1-208-871-81	s	RES, CHIP 220 (1005)
R932	1-208-911-81	s	RES, CHIP 10K (1005)
R934	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R950	1-208-855-81	s	RES, CHIP 47 (1005)
R951	1-208-887-81	s	RES, CHIP 1.0K (1005)
R952	1-208-911-81	s	RES, CHIP 10K (1005)

(DCP-37 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R953	1-208-911-81	s	RES, CHIP 10K (1005)
R954	1-208-863-81	s	RES, CHIP 100 (1005)
R955	1-208-863-81	s	RES, CHIP 100 (1005)
R958	1-208-863-81	s	RES, CHIP 100 (1005)
R960	1-208-855-81	s	RES, CHIP 47 (1005)
R961	1-208-855-81	s	RES, CHIP 47 (1005)
R970	1-220-878-81	s	RES, CHIP 22 (1005)
R971	1-208-863-81	s	RES, CHIP 100 (1005)
R972	1-208-943-81	s	RES, CHIP 220K (1005)
R973	1-208-911-81	s	RES, CHIP 10K (1005)
R974	1-208-911-81	s	RES, CHIP 10K (1005)
R976	1-208-911-81	s	RES, CHIP 10K (1005)
R977	1-208-887-81	s	RES, CHIP 1.0K (1005)
R979	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R981	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R982	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R983	1-208-863-81	s	RES, CHIP 100 (1005)
R984	1-208-863-81	s	RES, CHIP 100 (1005)
R985	1-208-935-81	s	RES, CHIP 100K (1005)
R986	1-208-887-81	s	RES, CHIP 1.0K (1005)
R987	1-208-915-81	s	RES, CHIP 15K (1005)
R989	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R990	1-208-887-81	s	RES, CHIP 1.0K (1005)
R992	1-208-887-81	s	RES, CHIP 1.0K (1005)
R994	1-208-887-81	s	RES, CHIP 1.0K (1005)
R995	1-208-887-81	s	RES, CHIP 1.0K (1005)
R996	1-208-927-81	s	RES, CHIP 47K (1005)
R997	1-218-990-81	s	CONDUCTOR, CHIP (1005)
RB1	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB2	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB3	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB4	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB5	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB6	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB7	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB8	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB9	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB10	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB11	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB12	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB13	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB14	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB15	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB16	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB17	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB18	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB19	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB20	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB21	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB22	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB23	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB200	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB201	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB202	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB203	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB204	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB205	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB206	1-234-372-21	s	RES, NETWORK 100 (1005X4)

(DCP-37 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB207	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB208	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB209	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB210	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB211	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB212	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB213	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB214	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB215	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB216	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB217	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB218	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB219	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB220	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB221	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB222	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB223	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB224	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB225	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB226	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB227	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB228	1-234-369-21	s	RES, NETWORK 10 (1005X4)
RB229	1-234-369-21	s	RES, NETWORK 10 (1005X4)
RB230	1-234-369-21	s	RES, NETWORK 10 (1005X4)
RB231	1-234-369-21	s	RES, NETWORK 10 (1005X4)
RB232	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB233	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB234	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB235	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB236	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB237	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB238	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB239	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB401	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB402	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB403	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB404	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB405	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB406	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB407	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB408	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB409	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB410	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB411	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB412	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB414	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB415	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB416	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB417	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB418	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB419	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB420	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB421	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB422	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB423	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB424	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB425	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB426	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB427	1-234-381-21	s	RES, NETWORK 100K (1005X4)

(DCP-37 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB428	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB429	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB430	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB431	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB500	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB501	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB504	1-234-369-21	s	RES, NETWORK 10 (1005X4)
RB505	1-234-369-21	s	RES, NETWORK 10 (1005X4)
RB509	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB510	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB511	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB512	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB513	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB514	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB515	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB516	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB517	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB521	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB522	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB523	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB525	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB526	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB527	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB529	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB530	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB531	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB532	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB533	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB539	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB540	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB541	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB542	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB543	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB544	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB546	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB547	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB548	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB549	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB550	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB551	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB552	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB554	1-234-369-21	s	RES, NETWORK 10 (1005X4)
RB555	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB556	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB557	1-234-369-21	s	RES, NETWORK 10 (1005X4)
RB558	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB559	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB560	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB561	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB562	1-234-369-21	s	RES, NETWORK 10 (1005X4)
RB565	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB566	1-234-369-21	s	RES, NETWORK 10 (1005X4)
RB568	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB569	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB570	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB576	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB577	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB578	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB579	1-234-372-21	s	RES, NETWORK 100 (1005X4)

(DCP-37 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB580	1-234-369-21	s	RES, NETWORK 10 (1005X4)
RB581	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB582	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB583	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB600	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB601	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB602	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB603	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB604	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB605	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB606	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB607	1-234-369-21	s	RES, NETWORK 10 (1005X4)
RB608	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB609	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB610	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB611	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB612	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB747	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB748	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB749	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB900	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB901	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB902	1-234-372-21	s	RES, NETWORK 100 (1005X4)
S501	1-692-271-41	s	SWITCH, SLIDE
THP400	1-803-353-21	s	THERMISTOR, POSITIVE
X401	1-795-561-21	s	VIBRATOR, CERAMIC
X600	1-795-831-12	s	OSCILLATOR, CRYSTAL (VCXO)3.3V
X601	1-795-670-12	s	OSCILLATOR, CRYSTAL (VCXO)3.3V
X602	1-795-671-12	s	OSCILLATOR, CRYSTAL (VCXO)3.3V

DCP-37A BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1169-366-A	s	MOUNTED CIRCUIT BOARD, DCP-37A
3pcs	3-855-938-01	s	SCREW
1pc	6-703-421-01	s	IC HD64F7145F50
C1	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C5	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C6	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C7	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C8	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C9	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C10	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C11	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C12	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C13	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C14	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C15	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C16	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C17	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C18	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C19	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C20	1-100-620-91	s	CAP, CHIP CERAMIC 47MF B(3225)
C22	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C23	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C24	1-100-352-91	s	CAP, CERAMIC 1MF C (1608)
C25	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C26	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C27	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C28	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C29	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C30	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C32	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C33	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C34	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C35	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C38	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C39	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C40	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C41	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C42	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C43	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C44	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C45	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C46	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C47	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C48	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C49	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C50	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C51	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C52	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C53	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C54	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C55	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C56	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C57	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C58	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C59	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)

(DCP-37A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C60	1-100-620-91	s	CAP, CHIP CERAMIC 47MF B(3225)
C61	1-100-620-91	s	CAP, CHIP CERAMIC 47MF B(3225)
C64	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C65	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C66	1-100-352-91	s	CAP, CERAMIC 1MF C (1608)
C67	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C68	1-100-352-91	s	CAP, CERAMIC 1MF C (1608)
C69	1-208-907-81	s	RES, CHIP 6.8K (1005)
C70	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C71	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C72	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C73	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C74	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C75	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C76	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C77	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C78	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C79	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C81	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C83	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C84	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C85	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C86	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C87	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C88	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C89	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C94	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C95	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C96	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C97	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C98	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C99	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C100	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C101	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C102	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C103	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C104	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C106	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C107	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C108	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C109	1-165-872-21	s	CAP, ELECT 47MF (5.0X6.5)
C110	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C111	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C112	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C113	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C114	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C115	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C117	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C118	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C120	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C121	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C123	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C124	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C125	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C126	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C127	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C128	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C129	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C130	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(DCP-37A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C131	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C132	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C133	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C134	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C135	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C136	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C137	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C138	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C139	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C140	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C141	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C142	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C143	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C144	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C145	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C146	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C148	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C149	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C150	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C151	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C202	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C203	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C204	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C205	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C206	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C207	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C208	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C209	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C213	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C214	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C215	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C216	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C217	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C218	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C219	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C220	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C221	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C222	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C223	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C224	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C225	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C226	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C227	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C228	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C229	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C232	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C238	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C240	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C241	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C242	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C243	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C244	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C245	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C246	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C247	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C248	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C249	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C250	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C251	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(DCP-37A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C261	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C262	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C264	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C265	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C267	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C268	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C269	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C270	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C271	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C272	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C273	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C274	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C275	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C276	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C277	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C278	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C279	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C280	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C281	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C283	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C284	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C286	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C287	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C288	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C289	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C290	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C291	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C314	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C315	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C316	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C317	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C318	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C370	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C371	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C372	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C373	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C374	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C377	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C378	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C400	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C401	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C402	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C403	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C404	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C405	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C406	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C407	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C408	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C409	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C410	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C411	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C412	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C414	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C416	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C417	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C418	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C419	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C420	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C421	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(DCP-37A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C422	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C423	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C424	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C425	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C426	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C427	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C428	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C429	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C430	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C431	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C433	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C434	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C435	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C436	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C437	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C438	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C439	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C440	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C441	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C442	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C443	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C444	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C445	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C446	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C447	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C448	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C449	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C450	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C451	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C452	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C453	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C454	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C455	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C456	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C457	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C458	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C459	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C460	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C461	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C462	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C463	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C464	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C465	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C466	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C467	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C468	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C469	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C470	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C471	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C472	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C473	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C474	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C475	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C476	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C477	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C478	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C479	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C480	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C481	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(DCP-37A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C482	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C483	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C484	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C485	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C486	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C487	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C488	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C489	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C490	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C491	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C492	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C493	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C494	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C495	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C496	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C497	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C498	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C499	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C501	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C502	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C503	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C504	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C505	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C506	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C507	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C509	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C510	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C513	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C514	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C515	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C516	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C517	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C518	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C519	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C520	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C521	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C528	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C540	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C541	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C542	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C543	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C600	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C601	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C602	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C603	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C604	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C605	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C606	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C607	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C608	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C609	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C610	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C611	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C612	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C613	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C614	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C615	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C616	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C617	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(DCP-37A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C618	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C619	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C620	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C621	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C622	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C623	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C624	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C625	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C626	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C627	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C628	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C629	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C630	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C631	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C632	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C633	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C634	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C635	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C636	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C637	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C638	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C641	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C642	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C643	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C644	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C645	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C648	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C649	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C652	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C653	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C654	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C655	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C656	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C657	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C658	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C659	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C660	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C661	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C662	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C663	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C664	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C665	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C666	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C667	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C668	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C669	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C670	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C671	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C672	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C673	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C674	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C675	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C676	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C677	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C678	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C679	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C680	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C681	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C682	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(DCP-37A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C683	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C684	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C685	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C686	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C687	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C688	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C689	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C690	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C691	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C692	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C693	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C694	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C695	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C696	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C697	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C699	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C701	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C702	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C703	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C704	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C705	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C706	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C707	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C708	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C709	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C710	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C711	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C712	1-164-882-81	s	CAP,CHIP CERAMIC 220PF CH 1005
C713	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C740	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C741	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C742	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C743	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C744	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C745	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C746	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C747	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C748	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C749	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C750	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C751	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C752	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C753	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C754	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C755	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C756	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C757	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C758	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C759	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C760	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C761	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C762	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C763	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C764	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C765	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C766	1-127-956-21	s	CAP, CHIP FILM 0.1MF (3225)
C767	1-107-826-91	s	CAP, CHIP CERAMIC 100000PF B
C768	1-107-826-91	s	CAP, CHIP CERAMIC 100000PF B
C771	1-165-989-91	s	CAP, CERAMIC 10MF (2012)

(DCP-37A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C772	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C773	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C774	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C775	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C776	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C777	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C778	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C779	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C780	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C781	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C782	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C784	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C785	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C786	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C787	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C788	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C789	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C790	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C791	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C792	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C793	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C794	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C795	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C796	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C800	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C801	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C802	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C803	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C804	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C805	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C806	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C807	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C808	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C809	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C810	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C811	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C812	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C813	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C814	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C815	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C816	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C817	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C818	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C819	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C820	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C821	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C822	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C823	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C824	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C825	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C826	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C827	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C828	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C829	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C830	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C831	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C832	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C833	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C834	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(DCP-37A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C835	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C836	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C837	1-128-589-21	s	CAP, CHIP ELECT 47MF
C838	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C839	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C840	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C841	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C843	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C844	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C845	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C846	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C847	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C848	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C849	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C850	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C851	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C852	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C853	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C854	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C855	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C856	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C857	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C858	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C859	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C860	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C861	1-128-589-21	s	CAP, CHIP ELECT 47MF
C862	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C863	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C864	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C865	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C866	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C867	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C868	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C869	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C870	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C871	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C872	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C873	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C874	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C875	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C876	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C877	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C878	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C879	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C880	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C881	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C882	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C883	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C884	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C885	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C886	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C887	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C888	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C889	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C890	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C892	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C893	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C894	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C896	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(DCP-37A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C897	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C898	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C900	1-137-897-21	s	CAP, ELECT 150MF (6.3X6)
C901	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C902	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C903	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C906	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C907	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C908	1-127-956-21	s	CAP, CHIP FILM 0.1MF (3225)
C909	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C910	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C911	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C912	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C913	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C914	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C915	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C916	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C917	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C918	1-127-956-21	s	CAP, CHIP FILM 0.1MF (3225)
C919	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C920	1-165-872-21	s	CAP, ELECT 47MF (5.0X6.5)
C921	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C922	1-127-956-21	s	CAP, CHIP FILM 0.1MF (3225)
C923	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C924	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C925	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C926	1-127-956-21	s	CAP, CHIP FILM 0.1MF (3225)
C927	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C928	1-137-897-21	s	CAP, ELECT 150MF (6.3X6)
C929	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C930	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C931	1-127-956-21	s	CAP, CHIP FILM 0.1MF (3225)
C932	1-127-956-21	s	CAP, CHIP FILM 0.1MF (3225)
C933	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C936	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C937	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C938	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C939	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C940	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C941	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C942	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C943	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C944	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C945	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C946	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C948	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C949	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C950	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C952	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C954	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C955	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C957	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C959	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C962	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C963	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C964	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C970	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C971	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C972	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(DCP-37A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
CN3	1-778-535-31	s	CONNECTOR, FFC/FPC(ZIF) AN 45P
CN6	1-580-057-21	s	PIN, CONNECTOR (SMD) 4P
CN11	1-818-579-91	s	CONNECTOR, BOARD TO BOARD(60P)
CN24	1-764-094-21	o	PIN, CONNECTOR (PC BOARD) 9P
CN200	1-764-243-31	o	CONNECTOR (COAXIAL)
CN402	1-766-382-21	s	PIN, CONNECTOR (1.5MM)(SMD)10P
CN403	1-573-290-21	s	PIN, CONNECTOR (1.5MM) (SMD)4P
CN601	1-784-254-21	s	CONNECTOR 10P
D203	8-719-421-68	s	DIODE MA132WK-TX
D370	8-719-421-68	s	DIODE MA132WK-TX
D400	8-719-421-72	s	DIODE MA132WA-TX
D401	8-719-421-72	s	DIODE MA132WA-TX
D402	8-719-421-72	s	DIODE MA132WA-TX
D403	8-719-421-68	s	DIODE MA132WK-TX
D404	8-719-938-77	s	DIODE SB05-05C-TB-E
D600	8-719-074-31	s	DIODE CL-196YG-CD-T
D601	8-719-074-31	s	DIODE CL-196YG-CD-T
D602	8-719-074-31	s	DIODE CL-196YG-CD-T
D603	8-719-074-31	s	DIODE CL-196YG-CD-T
E1	1-535-877-22	s	CHIP, CHECKER
E2	1-535-877-22	s	CHIP, CHECKER
E3	1-535-877-22	s	CHIP, CHECKER
E4	1-535-877-22	s	CHIP, CHECKER
E6	1-535-877-22	s	CHIP, CHECKER
E7	1-535-877-22	s	CHIP, CHECKER
E9	1-535-877-22	s	CHIP, CHECKER
E10	1-535-877-22	s	CHIP, CHECKER
E11	1-535-877-22	s	CHIP, CHECKER
E12	1-535-877-22	s	CHIP, CHECKER
FB400	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB401	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FL2	1-234-871-11	s	FILTER, LOW PASS
FL3	1-234-871-11	s	FILTER, LOW PASS
FL4	1-234-871-11	s	FILTER, LOW PASS
IC3	8-759-672-76	s	IC AK9813BF-E2
IC4	8-759-672-76	s	IC AK9813BF-E2
IC5	6-706-357-01	s	IC LTC1664IGN#TR
IC6	8-759-327-01	s	IC NJM062V(TE2)
IC7	6-706-478-01	s	IC TC7SET08FU(T5RSOJF)
IC8	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC9	8-759-663-35	s	IC 74VHC4053MTCX
IC10	8-753-261-02	s	IC CXA3648AR-T4
IC11	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC12	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC13	8-753-261-02	s	IC CXA3648AR-T4
IC14	8-753-261-02	s	IC CXA3648AR-T4
IC15	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC16	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC17	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC18	6-709-150-01	s	IC LTC2228CUH#TR
IC19	6-709-150-01	s	IC LTC2228CUH#TR
IC20	6-709-150-01	s	IC LTC2228CUH#TR
IC21	8-759-327-01	s	IC NJM062V(TE2)
IC22	8-759-327-01	s	IC NJM062V(TE2)
IC24	6-701-989-01	s	IC SN74LVC126APWR
IC25	6-700-831-01	s	IC TC7WZ74FK(TE85R)
IC26	6-706-088-01	s	IC UPD6467GR-560-E2

(DCP-37A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC201	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC202	8-759-564-49	s	IC TC7W53FU(TE12R)
IC203	6-704-646-01	s	IC ADV7310KST
IC204	6-704-646-01	s	IC ADV7310KST
IC205	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC206	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC208	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC216	6-704-646-01	s	IC ADV7310KST
IC223	8-759-327-01	s	IC NJM062V(TE2)
IC224	6-705-409-01	s	IC SN74AHC1G66HDCK3
IC227	6-705-409-01	s	IC SN74AHC1G66HDCK3
IC228	6-706-478-01	s	IC TC7SET08FU(T5RSOJF)
IC230	6-705-409-01	s	IC SN74AHC1G66HDCK3
IC231	6-705-409-01	s	IC SN74AHC1G66HDCK3
IC370	8-759-327-01	s	IC NJM062V(TE2)
IC371	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC375	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC400	6-704-099-01	s	IC TC7WZ08FK(TE85R)
IC401	6-702-319-01	s	IC TC7WZ04FK(TE85R)
IC402	8-759-594-17	o	IC CXD9093R
IC404	8-759-592-48	s	IC TC7SZ32FU(TE85R)
IC405	8-759-546-74	s	IC TC7WH157FU(TE12R)
IC406	8-759-546-74	s	IC TC7WH157FU(TE12R)
IC407	8-759-592-48	s	IC TC7SZ32FU(TE85R)
IC408	8-759-546-74	s	IC TC7WH157FU(TE12R)
IC411	8-759-564-49	s	IC TC7W53FU(TE12R)
IC412	6-600-060-01	s	IC TC7WZ32FK(TE85R)
IC413	6-705-514-01	s	IC MAX3222IPWR
IC415	8-759-656-54	s	IC TC7WH14FK(TE85R)
IC416	8-759-346-27	s	IC LM45BIM3X
IC417	6-701-905-01	s	IC AM26C31CDBR
IC418	8-759-327-01	s	IC NJM062V(TE2)
IC419	8-759-564-49	s	IC TC7W53FU(TE12R)
IC420	8-759-663-35	s	IC 74VHC4053MTCX
IC421	8-759-327-01	s	IC NJM062V(TE2)
IC422	6-706-476-01	s	IC TC7SET04FU(T5RSOJF)
IC423	6-705-870-01	s	IC CAT24WC32WI-TE13
IC424	8-759-592-44	s	IC TC7SZ04FU(TE85R)
IC426	8-759-656-54	s	IC TC7WH14FK(TE85R)
IC428	6-704-099-01	s	IC TC7WZ08FK(TE85R)
IC429	8-759-591-61	s	IC TC7WHU04FU(TE12R)
IC430	8-759-683-24	s	IC MAX821RUS+TG069
IC431	6-700-831-01	s	IC TC7WZ74FK(TE85R)
IC433	6-600-060-01	s	IC TC7WZ32FK(TE85R)
IC434	8-759-564-49	s	IC TC7W53FU(TE12R)
IC435	6-704-099-01	s	IC TC7WZ08FK(TE85R)
IC438	6-704-099-01	s	IC TC7WZ08FK(TE85R)
IC439	6-709-166-01	s	IC M5M5W816TP-55HI
IC440	6-709-166-01	s	IC M5M5W816TP-55HI
IC441	8-759-669-43	s	IC SN74LVC157APWR-12
IC442	6-704-988-01	s	IC FM18L08-70-STR
IC443	6-704-988-01	s	IC FM18L08-70-STR
IC444	6-704-099-01	s	IC TC7WZ08FK(TE85R)
IC445	6-704-099-01	s	IC TC7WZ08FK(TE85R)
IC446	8-759-592-48	s	IC TC7SZ32FU(TE85R)
IC462	8-759-327-01	s	IC NJM062V(TE2)
IC463	8-759-327-01	s	IC NJM062V(TE2)
IC470	6-700-831-01	s	IC TC7WZ74FK(TE85R)
IC500	8-759-392-77	s	IC SN74LVC245APWR

(DCP-37A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC502	8-759-392-77	s	IC SN74LVC245APWR
IC503	6-704-099-01	s	IC TC7WZ08FK(TE85R)
IC505	8-759-669-42	s	IC SN74LVC138APWR-12
IC506	8-759-825-66	s	IC SN74LVC139APWR
IC507	8-759-825-66	s	IC SN74LVC139APWR
IC508	8-759-669-44	s	IC SN74LVC74APWR-12
IC509	8-752-392-03	s	IC CXD1095BR
IC510	8-759-656-54	s	IC TC7WH14FK(TE85R)
IC511	6-702-948-01	s	IC SN74AUC1G08DCKR
IC512	6-600-060-01	s	IC TC7WZ32FK(TE85R)
IC513	6-600-060-01	s	IC TC7WZ32FK(TE85R)
IC514	8-752-392-03	s	IC CXD1095BR
IC515	8-752-392-03	s	IC CXD1095BR
IC516	6-706-088-01	s	IC UPD6467GR-560-E2
IC517	8-759-392-77	s	IC SN74LVC245APWR
IC524	8-759-392-77	s	IC SN74LVC245APWR
IC535	8-759-592-48	s	IC TC7SZ32FU(TE85R)
IC536	8-759-392-77	s	IC SN74LVC245APWR
IC541	8-759-592-48	s	IC TC7SZ32FU(TE85R)
IC542	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC601	6-704-099-01	s	IC TC7WZ08FK(TE85R)
IC602	6-704-099-01	s	IC TC7WZ08FK(TE85R)
IC603	8-759-398-57	s	IC LM1881MX NOPB
IC605	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC606	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC607	6-706-478-01	s	IC TC7SET08FU(T5RSOJF)
IC610	6-706-478-01	s	IC TC7SET08FU(T5RSOJF)
IC612	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC613	6-701-453-01	s	IC SN75207BNSR
IC614	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC615	8-759-549-15	s	IC SN74LV245APWR
IC616	8-759-392-77	s	IC SN74LVC245APWR
IC617	8-759-392-77	s	IC SN74LVC245APWR
IC618	8-759-669-78	s	IC TLC2933IPWR-12
IC619	8-759-669-78	s	IC TLC2933IPWR-12
IC620	8-759-669-78	s	IC TLC2933IPWR-12
IC621	6-706-478-01	s	IC TC7SET08FU(T5RSOJF)
IC622	6-706-478-01	s	IC TC7SET08FU(T5RSOJF)
IC623	8-759-663-35	s	IC 74VHC4053MTCX
IC624	8-759-327-01	s	IC NJM062V(TE2)
IC625	8-759-327-01	s	IC NJM062V(TE2)
IC626	8-759-592-44	s	IC TC7SZ04FU(TE85R)
IC627	6-704-099-01	s	IC TC7WZ08FK(TE85R)
IC628	6-704-099-01	s	IC TC7WZ08FK(TE85R)
IC629	8-759-669-41	s	IC SN74LVC125APWR-12
IC630	8-759-689-09	s	IC SN65LVDT2DBVR
IC631	6-704-965-01	s	IC PLL1705DBQR
IC632	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC634	8-759-592-48	s	IC TC7SZ32FU(TE85R)
IC635	8-759-592-44	s	IC TC7SZ04FU(TE85R)
IC636	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC639	6-704-099-01	s	IC TC7WZ08FK(TE85R)
IC640	8-759-669-43	s	IC SN74LVC157APWR-12
IC641	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC642	8-759-592-48	s	IC TC7SZ32FU(TE85R)
IC740	8-759-585-28	s	IC CY62256VLL-70ZXC-T2
IC742	8-759-669-67	s	IC TL074CPWR-12
IC744	8-759-669-67	s	IC TL074CPWR-12
IC745	6-707-885-01	s	IC TC74VHCT08AFT(EKJ)

(DCP-37A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC746	6-707-885-01	s	IC TC74VHCT08AFT(EKJ)
IC747	6-706-478-01	s	IC TC7SET08FU(T5RSOJF)
IC748	6-706-358-01	s	IC AD5424YCPZ-REEL7
IC758	8-759-596-34	s	IC SN74LV4053APWR
IC759	8-759-596-34	s	IC SN74LV4053APWR
IC760	8-759-596-34	s	IC SN74LV4053APWR
IC761	8-759-592-48	s	IC TC7SZ32FU(TE85R)
IC762	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC763	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC764	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC765	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC804	8-759-592-44	s	IC TC7SZ04FU(TE85R)
IC901	8-759-327-01	s	IC NJM062V(TE2)
IC902	8-759-327-01	s	IC NJM062V(TE2)
IC904	8-759-327-01	s	IC NJM062V(TE2)
IC905	8-759-694-36	s	IC SN74CBTLV3257PWR
IC907	6-704-976-01	s	IC ADR381ARTZ-REEL7
IC908	8-759-584-32	s	IC MB86189PFV-G-BND-ER-E1
IC909	8-759-680-48	s	IC TC7WH157FK(TE85R)
IC910	8-759-656-54	s	IC TC7WH14FK(TE85R)
IC911	8-759-592-48	s	IC TC7SZ32FU(TE85R)
IC912	6-704-099-01	s	IC TC7WZ08FK(TE85R)
IC913	6-704-099-01	s	IC TC7WZ08FK(TE85R)
IC914	6-702-319-01	s	IC TC7WZ04FK(TE85R)
L2	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L3	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L4	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L5	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L7	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L200	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L202	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L203	1-412-943-21	s	INDUCTOR 2.2UH (2520)
L204	1-412-943-21	s	INDUCTOR 2.2UH (2520)
L206	1-412-943-21	s	INDUCTOR 2.2UH (2520)
L207	1-412-947-21	s	INDUCTOR 4.7UH (2520)
L209	1-412-947-21	s	INDUCTOR 4.7UH (2520)
L401	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L402	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L403	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L404	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L600	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L601	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L602	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L603	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L605	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L606	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L607	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L608	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L740	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L741	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L742	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L801	1-419-630-21	s	COIL, CHOKE 4.7UH
L802	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L803	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L804	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L900	1-419-630-21	s	COIL, CHOKE 4.7UH
L901	1-419-630-21	s	COIL, CHOKE 4.7UH
L902	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L903	1-414-398-41	s	INDUCTOR (SMD) 10.0UH

(DCP-37A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
L904	1-419-630-21	s	COIL, CHOKE 4.7UH
L908	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L950	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L951	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
PH400	8-749-014-35	s	IC HCPL-0630-500
Q1	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q200	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q201	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q202	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q206	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q207	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q208	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q209	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q214	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q370	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q402	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q403	8-729-209-73	s	TRANSISTOR 2SA1213Y-TE12L
Q404	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q405	8-729-041-23	s	TRANSISTOR NDS356AP
Q406	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q407	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q408	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q409	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q500	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q601	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q603	8-729-044-07	f	TRANSISTOR SI3443DV-T1
Q604	8-729-044-07	f	TRANSISTOR SI3443DV-T1
Q751	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q752	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q900	8-729-209-73	s	TRANSISTOR 2SA1213Y-TE12L
Q901	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q902	8-729-209-77	s	TRANSISTOR 2SC2873Y-TE12L
Q903	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q904	8-729-209-73	s	TRANSISTOR 2SA1213Y-TE12L
Q905	8-729-209-73	s	TRANSISTOR 2SA1213Y-TE12L
Q906	8-729-209-73	s	TRANSISTOR 2SA1213Y-TE12L
Q907	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
R1	1-208-915-81	s	RES, CHIP 15K (1005)
R2	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R9	1-208-895-81	s	RES, CHIP 2.2K (1005)
R10	1-208-911-81	s	RES, CHIP 10K (1005)
R11	1-208-907-81	s	RES, CHIP 6.8K (1005)
R12	1-208-879-81	s	RES, CHIP 470 (1005)
R13	1-208-911-81	s	RES, CHIP 10K (1005)
R14	1-208-903-81	s	RES, CHIP 4.7K (1005)
R15	1-208-911-81	s	RES, CHIP 10K (1005)
R16	1-220-870-81	s	RES, CHIP 10 (1005)
R17	1-208-863-81	s	RES, CHIP 100 (1005)
R18	1-208-903-81	s	RES, CHIP 4.7K (1005)
R19	1-208-887-81	s	RES, CHIP 1.0K (1005)
R20	1-208-959-81	s	RES, CHIP 1M (1005)
R21	1-208-863-81	s	RES, CHIP 100 (1005)
R23	1-208-879-81	s	RES, CHIP 470 (1005)
R24	1-208-899-81	s	RES, CHIP 3.3K (1005)
R25	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(DCP-37A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R27	1-208-879-81	s	RES, CHIP 470 (1005)
R28	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R29	1-208-887-81	s	RES, CHIP 1.0K (1005)
R30	1-208-887-81	s	RES, CHIP 1.0K (1005)
R31	1-208-887-81	s	RES, CHIP 1.0K (1005)
R32	1-208-887-81	s	RES, CHIP 1.0K (1005)
R33	1-208-919-81	s	RES, CHIP 22K (1005)
R35	1-208-911-81	s	RES, CHIP 10K (1005)
R39	1-208-911-81	s	RES, CHIP 10K (1005)
R40	1-208-911-81	s	RES, CHIP 10K (1005)
R41	1-208-911-81	s	RES, CHIP 10K (1005)
R42	1-208-919-81	s	RES, CHIP 22K (1005)
R43	1-208-911-81	s	RES, CHIP 10K (1005)
R44	1-208-911-81	s	RES, CHIP 10K (1005)
R45	1-208-887-81	s	RES, CHIP 1.0K (1005)
R46	1-208-887-81	s	RES, CHIP 1.0K (1005)
R49	1-208-879-81	s	RES, CHIP 470 (1005)
R50	1-208-879-81	s	RES, CHIP 470 (1005)
R51	1-208-899-81	s	RES, CHIP 3.3K (1005)
R52	1-208-899-81	s	RES, CHIP 3.3K (1005)
R53	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R54	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R57	1-208-879-81	s	RES, CHIP 470 (1005)
R58	1-208-879-81	s	RES, CHIP 470 (1005)
R59	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R60	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R61	1-208-887-81	s	RES, CHIP 1.0K (1005)
R62	1-208-887-81	s	RES, CHIP 1.0K (1005)
R63	1-208-887-81	s	RES, CHIP 1.0K (1005)
R64	1-208-887-81	s	RES, CHIP 1.0K (1005)
R65	1-208-887-81	s	RES, CHIP 1.0K (1005)
R66	1-208-887-81	s	RES, CHIP 1.0K (1005)
R67	1-208-887-81	s	RES, CHIP 1.0K (1005)
R68	1-208-887-81	s	RES, CHIP 1.0K (1005)
R69	1-208-919-81	s	RES, CHIP 22K (1005)
R71	1-208-919-81	s	RES, CHIP 22K (1005)
R73	1-208-911-81	s	RES, CHIP 10K (1005)
R74	1-208-911-81	s	RES, CHIP 10K (1005)
R85	1-208-895-81	s	RES, CHIP 2.2K (1005)
R86	1-208-887-81	s	RES, CHIP 1.0K (1005)
R87	1-208-903-81	s	RES, CHIP 4.7K (1005)
R88	1-208-887-81	s	RES, CHIP 1.0K (1005)
R89	1-208-895-81	s	RES, CHIP 2.2K (1005)
R90	1-208-887-81	s	RES, CHIP 1.0K (1005)
R91	1-208-911-81	s	RES, CHIP 10K (1005)
R92	1-208-907-81	s	RES, CHIP 6.8K (1005)
R93	1-208-911-81	s	RES, CHIP 10K (1005)
R94	1-208-907-81	s	RES, CHIP 6.8K (1005)
R95	1-208-911-81	s	RES, CHIP 10K (1005)
R96	1-208-907-81	s	RES, CHIP 6.8K (1005)
R97	1-208-895-81	s	RES, CHIP 2.2K (1005)
R98	1-208-935-81	s	RES, CHIP 100K (1005)
R99	1-208-895-81	s	RES, CHIP 2.2K (1005)
R100	1-208-935-81	s	RES, CHIP 100K (1005)
R101	1-208-895-81	s	RES, CHIP 2.2K (1005)
R102	1-208-935-81	s	RES, CHIP 100K (1005)
R103	1-208-879-81	s	RES, CHIP 470 (1005)
R104	1-208-879-81	s	RES, CHIP 470 (1005)
R105	1-208-879-81	s	RES, CHIP 470 (1005)

(DCP-37A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R106	1-208-887-81	s	RES, CHIP 1.0K (1005)
R108	1-208-887-81	s	RES, CHIP 1.0K (1005)
R110	1-208-887-81	s	RES, CHIP 1.0K (1005)
R112	1-208-875-81	s	RES, CHIP 330 (1005)
R113	1-208-875-81	s	RES, CHIP 330 (1005)
R115	1-208-875-81	s	RES, CHIP 330 (1005)
R116	1-220-878-81	s	RES, CHIP 22 (1005)
R117	1-220-878-81	s	RES, CHIP 22 (1005)
R118	1-220-878-81	s	RES, CHIP 22 (1005)
R119	1-220-878-81	s	RES, CHIP 22 (1005)
R120	1-220-878-81	s	RES, CHIP 22 (1005)
R121	1-208-863-81	s	RES, CHIP 100 (1005)
R122	1-208-863-81	s	RES, CHIP 100 (1005)
R123	1-208-863-81	s	RES, CHIP 100 (1005)
R124	1-208-863-81	s	RES, CHIP 100 (1005)
R125	1-208-863-81	s	RES, CHIP 100 (1005)
R126	1-208-863-81	s	RES, CHIP 100 (1005)
R127	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R128	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R129	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R130	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R131	1-208-911-81	s	RES, CHIP 10K (1005)
R132	1-208-911-81	s	RES, CHIP 10K (1005)
R133	1-208-911-81	s	RES, CHIP 10K (1005)
R134	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R146	1-208-911-81	s	RES, CHIP 10K (1005)
R147	1-208-911-81	s	RES, CHIP 10K (1005)
R148	1-208-919-81	s	RES, CHIP 22K (1005)
R149	1-208-919-81	s	RES, CHIP 22K (1005)
R150	1-208-919-81	s	RES, CHIP 22K (1005)
R151	1-220-878-81	s	RES, CHIP 22 (1005)
R152	1-208-863-81	s	RES, CHIP 100 (1005)
R153	1-208-879-81	s	RES, CHIP 470 (1005)
R154	1-208-879-81	s	RES, CHIP 470 (1005)
R155	1-208-895-81	s	RES, CHIP 2.2K (1005)
R156	1-208-895-81	s	RES, CHIP 2.2K (1005)
R162	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R191	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R192	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R193	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R194	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R195	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R196	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R197	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R198	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R199	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R200	1-208-911-81	s	RES, CHIP 10K (1005)
R201	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R202	1-208-855-81	s	RES, CHIP 47 (1005)
R203	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R204	1-208-935-81	s	RES, CHIP 100K (1005)
R205	1-208-935-81	s	RES, CHIP 100K (1005)
R206	1-208-855-81	s	RES, CHIP 47 (1005)
R207	1-208-935-81	s	RES, CHIP 100K (1005)
R208	1-208-855-81	s	RES, CHIP 47 (1005)
R209	1-208-935-81	s	RES, CHIP 100K (1005)
R210	1-208-855-81	s	RES, CHIP 47 (1005)
R211	1-208-895-81	s	RES, CHIP 2.2K (1005)
R212	1-208-895-81	s	RES, CHIP 2.2K (1005)

(DCP-37A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R213	1-208-895-81	s	RES, CHIP 2.2K (1005)
R214	1-208-887-81	s	RES, CHIP 1.0K (1005)
R215	1-208-903-81	s	RES, CHIP 4.7K (1005)
R216	1-208-887-81	s	RES, CHIP 1.0K (1005)
R217	1-208-903-81	s	RES, CHIP 4.7K (1005)
R218	1-208-887-81	s	RES, CHIP 1.0K (1005)
R219	1-208-903-81	s	RES, CHIP 4.7K (1005)
R220	1-208-883-81	s	RES, CHIP 680 (1005)
R221	1-208-883-81	s	RES, CHIP 680 (1005)
R222	1-208-895-81	s	RES, CHIP 2.2K (1005)
R223	1-208-887-81	s	RES, CHIP 1.0K (1005)
R224	1-208-903-81	s	RES, CHIP 4.7K (1005)
R225	1-208-899-81	s	RES, CHIP 3.3K (1005)
R226	1-208-899-81	s	RES, CHIP 3.3K (1005)
R227	1-208-899-81	s	RES, CHIP 3.3K (1005)
R228	1-208-899-81	s	RES, CHIP 3.3K (1005)
R229	1-208-899-81	s	RES, CHIP 3.3K (1005)
R230	1-208-899-81	s	RES, CHIP 3.3K (1005)
R231	1-208-875-81	s	RES, CHIP 330 (1005)
R232	1-208-875-81	s	RES, CHIP 330 (1005)
R233	1-208-875-81	s	RES, CHIP 330 (1005)
R234	1-208-875-81	s	RES, CHIP 330 (1005)
R235	1-208-875-81	s	RES, CHIP 330 (1005)
R236	1-208-875-81	s	RES, CHIP 330 (1005)
R237	1-208-887-81	s	RES, CHIP 1.0K (1005)
R238	1-208-887-81	s	RES, CHIP 1.0K (1005)
R239	1-220-878-81	s	RES, CHIP 22 (1005)
R240	1-220-878-81	s	RES, CHIP 22 (1005)
R241	1-220-878-81	s	RES, CHIP 22 (1005)
R242	1-220-878-81	s	RES, CHIP 22 (1005)
R243	1-220-878-81	s	RES, CHIP 22 (1005)
R244	1-220-878-81	s	RES, CHIP 22 (1005)
R245	1-208-879-81	s	RES, CHIP 470 (1005)
R246	1-208-895-81	s	RES, CHIP 2.2K (1005)
R247	1-208-887-81	s	RES, CHIP 1.0K (1005)
R248	1-208-879-81	s	RES, CHIP 470 (1005)
R249	1-208-895-81	s	RES, CHIP 2.2K (1005)
R250	1-208-895-81	s	RES, CHIP 2.2K (1005)
R251	1-208-895-81	s	RES, CHIP 2.2K (1005)
R252	1-208-891-81	s	RES, CHIP 1.5K (1005)
R253	1-208-903-81	s	RES, CHIP 4.7K (1005)
R254	1-208-887-81	s	RES, CHIP 1.0K (1005)
R255	1-208-879-81	s	RES, CHIP 470 (1005)
R256	1-208-911-81	s	RES, CHIP 10K (1005)
R257	1-208-879-81	s	RES, CHIP 470 (1005)
R258	1-208-903-81	s	RES, CHIP 4.7K (1005)
R259	1-208-911-81	s	RES, CHIP 10K (1005)
R260	1-208-903-81	s	RES, CHIP 4.7K (1005)
R261	1-208-887-81	s	RES, CHIP 1.0K (1005)
R262	1-208-860-81	s	RES, CHIP 75 (1005)
R263	1-208-860-81	s	RES, CHIP 75 (1005)
R264	1-208-887-81	s	RES, CHIP 1.0K (1005)
R265	1-208-891-81	s	RES, CHIP 1.5K (1005)
R266	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R267	1-208-860-81	s	RES, CHIP 75 (1005)
R268	1-208-860-81	s	RES, CHIP 75 (1005)
R269	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R270	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R271	1-208-860-81	s	RES, CHIP 75 (1005)

(DCP-37A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R274	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R275	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R276	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R277	1-220-878-81	s	RES, CHIP 22 (1005)
R278	1-208-903-81	s	RES, CHIP 4.7K (1005)
R285	1-208-899-81	s	RES, CHIP 3.3K (1005)
R287	1-208-875-81	s	RES, CHIP 330 (1005)
R288	1-208-855-81	s	RES, CHIP 47 (1005)
R289	1-220-878-81	s	RES, CHIP 22 (1005)
R290	1-208-860-81	s	RES, CHIP 75 (1005)
R291	1-220-878-81	s	RES, CHIP 22 (1005)
R292	1-220-878-81	s	RES, CHIP 22 (1005)
R293	1-208-903-81	s	RES, CHIP 4.7K (1005)
R294	1-208-903-81	s	RES, CHIP 4.7K (1005)
R296	1-220-878-81	s	RES, CHIP 22 (1005)
R297	1-208-903-81	s	RES, CHIP 4.7K (1005)
R299	1-208-855-81	s	RES, CHIP 47 (1005)
R300	1-208-935-81	s	RES, CHIP 100K (1005)
R306	1-208-895-81	s	RES, CHIP 2.2K (1005)
R307	1-208-895-81	s	RES, CHIP 2.2K (1005)
R310	1-208-887-81	s	RES, CHIP 1.0K (1005)
R311	1-208-903-81	s	RES, CHIP 4.7K (1005)
R312	1-208-887-81	s	RES, CHIP 1.0K (1005)
R313	1-208-903-81	s	RES, CHIP 4.7K (1005)
R314	1-208-883-81	s	RES, CHIP 680 (1005)
R326	1-208-860-81	s	RES, CHIP 75 (1005)
R327	1-208-923-81	s	RES, CHIP 33K (1005)
R328	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R329	1-208-871-81	s	RES, CHIP 220 (1005)
R330	1-208-871-81	s	RES, CHIP 220 (1005)
R331	1-208-871-81	s	RES, CHIP 220 (1005)
R335	1-208-959-81	s	RES, CHIP 1M (1005)
R337	1-208-887-81	s	RES, CHIP 1.0K (1005)
R340	1-208-899-81	s	RES, CHIP 3.3K (1005)
R344	1-208-919-81	s	RES, CHIP 22K (1005)
R345	1-208-923-81	s	RES, CHIP 33K (1005)
R346	1-208-923-81	s	RES, CHIP 33K (1005)
R347	1-208-895-81	s	RES, CHIP 2.2K (1005)
R348	1-208-959-81	s	RES, CHIP 1M (1005)
R349	1-208-911-81	s	RES, CHIP 10K (1005)
R350	1-220-870-81	s	RES, CHIP 10 (1005)
R351	1-220-870-81	s	RES, CHIP 10 (1005)
R352	1-208-863-81	s	RES, CHIP 100 (1005)
R353	1-208-863-81	s	RES, CHIP 100 (1005)
R354	1-208-927-81	s	RES, CHIP 47K (1005)
R356	1-220-870-81	s	RES, CHIP 10 (1005)
R357	1-208-863-81	s	RES, CHIP 100 (1005)
R359	1-208-855-81	s	RES, CHIP 47 (1005)
R362	1-208-860-81	s	RES, CHIP 75 (1005)
R363	1-208-863-81	s	RES, CHIP 100 (1005)
R371	1-208-923-81	s	RES, CHIP 33K (1005)
R372	1-208-959-81	s	RES, CHIP 1M (1005)
R373	1-208-887-81	s	RES, CHIP 1.0K (1005)
R374	1-208-899-81	s	RES, CHIP 3.3K (1005)
R375	1-208-919-81	s	RES, CHIP 22K (1005)
R376	1-208-923-81	s	RES, CHIP 33K (1005)
R377	1-208-923-81	s	RES, CHIP 33K (1005)
R378	1-208-895-81	s	RES, CHIP 2.2K (1005)
R379	1-208-959-81	s	RES, CHIP 1M (1005)

(DCP-37A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R380	1-208-911-81	s	RES, CHIP 10K (1005)
R381	1-208-927-81	s	RES, CHIP 47K (1005)
R382	1-208-887-81	s	RES, CHIP 1.0K (1005)
R383	1-208-891-81	s	RES, CHIP 1.5K (1005)
R384	1-208-903-81	s	RES, CHIP 4.7K (1005)
R385	1-208-903-81	s	RES, CHIP 4.7K (1005)
R386	1-208-887-81	s	RES, CHIP 1.0K (1005)
R387	1-208-891-81	s	RES, CHIP 1.5K (1005)
R400	1-208-863-81	s	RES, CHIP 100 (1005)
R401	1-208-863-81	s	RES, CHIP 100 (1005)
R402	1-208-943-81	s	RES, CHIP 220K (1005)
R403	1-208-911-81	s	RES, CHIP 10K (1005)
R404	1-208-911-81	s	RES, CHIP 10K (1005)
R405	1-208-911-81	s	RES, CHIP 10K (1005)
R408	1-208-855-81	s	RES, CHIP 47 (1005)
R410	1-208-863-81	s	RES, CHIP 100 (1005)
R411	1-208-863-81	s	RES, CHIP 100 (1005)
R412	1-220-870-81	s	RES, CHIP 10 (1005)
R413	1-208-935-81	s	RES, CHIP 100K (1005)
R414	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R415	1-208-863-81	s	RES, CHIP 100 (1005)
R416	1-208-927-81	s	RES, CHIP 47K (1005)
R417	1-208-919-81	s	RES, CHIP 22K (1005)
R418	1-208-895-81	s	RES, CHIP 2.2K (1005)
R419	1-208-911-81	s	RES, CHIP 10K (1005)
R420	1-208-927-81	s	RES, CHIP 47K (1005)
R421	1-220-870-81	s	RES, CHIP 10 (1005)
R423	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R425	1-220-870-81	s	RES, CHIP 10 (1005)
R426	1-220-870-81	s	RES, CHIP 10 (1005)
R427	1-220-870-81	s	RES, CHIP 10 (1005)
R428	1-208-927-81	s	RES, CHIP 47K (1005)
R429	1-208-927-81	s	RES, CHIP 47K (1005)
R431	1-208-863-81	s	RES, CHIP 100 (1005)
R432	1-208-935-81	s	RES, CHIP 100K (1005)
R433	1-208-927-81	s	RES, CHIP 47K (1005)
R434	1-208-935-81	s	RES, CHIP 100K (1005)
R435	1-208-927-81	s	RES, CHIP 47K (1005)
R436	1-208-911-81	s	RES, CHIP 10K (1005)
R437	1-208-935-81	s	RES, CHIP 100K (1005)
R438	1-208-935-81	s	RES, CHIP 100K (1005)
R439	1-208-927-81	s	RES, CHIP 47K (1005)
R440	1-220-878-81	s	RES, CHIP 22 (1005)
R442	1-208-915-81	s	RES, CHIP 15K (1005)
R443	1-208-903-81	s	RES, CHIP 4.7K (1005)
R444	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R446	1-208-935-81	s	RES, CHIP 100K (1005)
R447	1-208-927-81	s	RES, CHIP 47K (1005)
R448	1-208-927-81	s	RES, CHIP 47K (1005)
R449	1-208-887-81	s	RES, CHIP 1.0K (1005)
R450	1-208-887-81	s	RES, CHIP 1.0K (1005)
R451	1-208-887-81	s	RES, CHIP 1.0K (1005)
R452	1-208-935-81	s	RES, CHIP 100K (1005)
R454	1-208-935-81	s	RES, CHIP 100K (1005)
R455	1-208-863-81	s	RES, CHIP 100 (1005)
R456	1-208-863-81	s	RES, CHIP 100 (1005)
R457	1-208-863-81	s	RES, CHIP 100 (1005)
R458	1-208-887-81	s	RES, CHIP 1.0K (1005)
R459	1-208-907-81	s	RES, CHIP 6.8K (1005)

(DCP-37A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R460	1-208-907-81	s	RES, CHIP 6.8K (1005)
R461	1-208-935-81	s	RES, CHIP 100K (1005)
R462	1-208-863-81	s	RES, CHIP 100 (1005)
R463	1-208-935-81	s	RES, CHIP 100K (1005)
R464	1-208-863-81	s	RES, CHIP 100 (1005)
R465	1-208-863-81	s	RES, CHIP 100 (1005)
R466	1-208-887-81	s	RES, CHIP 1.0K (1005)
R467	1-208-895-81	s	RES, CHIP 2.2K (1005)
R468	1-208-935-81	s	RES, CHIP 100K (1005)
R469	1-208-911-81	s	RES, CHIP 10K (1005)
R470	1-208-935-81	s	RES, CHIP 100K (1005)
R471	1-208-887-81	s	RES, CHIP 1.0K (1005)
R472	1-208-887-81	s	RES, CHIP 1.0K (1005)
R473	1-208-899-81	s	RES, CHIP 3.3K (1005)
R474	1-208-927-81	s	RES, CHIP 47K (1005)
R475	1-208-855-81	s	RES, CHIP 47 (1005)
R476	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R477	1-208-871-81	s	RES, CHIP 220 (1005)
R478	1-208-911-81	s	RES, CHIP 10K (1005)
R479	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R480	1-208-919-81	s	RES, CHIP 22K (1005)
R481	1-208-935-81	s	RES, CHIP 100K (1005)
R482	1-208-935-81	s	RES, CHIP 100K (1005)
R483	1-208-855-81	s	RES, CHIP 47 (1005)
R484	1-208-855-81	s	RES, CHIP 47 (1005)
R485	1-208-863-81	s	RES, CHIP 100 (1005)
R486	1-220-870-81	s	RES, CHIP 10 (1005)
R488	1-208-887-81	s	RES, CHIP 1.0K (1005)
R490	1-208-863-81	s	RES, CHIP 100 (1005)
R491	1-208-863-81	s	RES, CHIP 100 (1005)
R492	1-208-935-81	s	RES, CHIP 100K (1005)
R493	1-208-863-81	s	RES, CHIP 100 (1005)
R494	1-208-863-81	s	RES, CHIP 100 (1005)
R495	1-208-863-81	s	RES, CHIP 100 (1005)
R496	1-208-887-81	s	RES, CHIP 1.0K (1005)
R497	1-208-935-81	s	RES, CHIP 100K (1005)
R498	1-208-903-81	s	RES, CHIP 4.7K (1005)
R500	1-208-935-81	s	RES, CHIP 100K (1005)
R501	1-208-863-81	s	RES, CHIP 100 (1005)
R502	1-208-855-81	s	RES, CHIP 47 (1005)
R503	1-208-863-81	s	RES, CHIP 100 (1005)
R504	1-208-863-81	s	RES, CHIP 100 (1005)
R505	1-208-863-81	s	RES, CHIP 100 (1005)
R506	1-220-870-81	s	RES, CHIP 10 (1005)
R507	1-208-863-81	s	RES, CHIP 100 (1005)
R508	1-208-863-81	s	RES, CHIP 100 (1005)
R509	1-208-919-81	s	RES, CHIP 22K (1005)
R512	1-208-863-81	s	RES, CHIP 100 (1005)
R513	1-208-863-81	s	RES, CHIP 100 (1005)
R517	1-208-863-81	s	RES, CHIP 100 (1005)
R527	1-208-887-81	s	RES, CHIP 1.0K (1005)
R528	1-208-887-81	s	RES, CHIP 1.0K (1005)
R529	1-208-887-81	s	RES, CHIP 1.0K (1005)
R537	1-208-863-81	s	RES, CHIP 100 (1005)
R538	1-208-903-81	s	RES, CHIP 4.7K (1005)
R539	1-208-903-81	s	RES, CHIP 4.7K (1005)
R540	1-208-863-81	s	RES, CHIP 100 (1005)
R541	1-208-863-81	s	RES, CHIP 100 (1005)
R542	1-208-863-81	s	RES, CHIP 100 (1005)

(DCP-37A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R543	1-208-935-81	s	RES, CHIP 100K (1005)
R544	1-208-863-81	s	RES, CHIP 100 (1005)
R600	1-208-863-81	s	RES, CHIP 100 (1005)
R601	1-208-863-81	s	RES, CHIP 100 (1005)
R603	1-208-863-81	s	RES, CHIP 100 (1005)
R604	1-208-911-81	s	RES, CHIP 10K (1005)
R605	1-208-911-81	s	RES, CHIP 10K (1005)
R606	1-208-911-81	s	RES, CHIP 10K (1005)
R607	1-208-911-81	s	RES, CHIP 10K (1005)
R608	1-208-911-81	s	RES, CHIP 10K (1005)
R609	1-208-887-81	s	RES, CHIP 1.0K (1005)
R610	1-208-887-81	s	RES, CHIP 1.0K (1005)
R611	1-208-955-81	s	RES, CHIP 680K (1005)
R614	1-208-860-81	s	RES, CHIP 75 (1005)
R615	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R616	1-208-887-81	s	RES, CHIP 1.0K (1005)
R617	1-208-887-81	s	RES, CHIP 1.0K (1005)
R618	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R622	1-208-895-81	s	RES, CHIP 2.2K (1005)
R625	1-208-911-81	s	RES, CHIP 10K (1005)
R626	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R627	1-208-955-81	s	RES, CHIP 680K (1005)
R628	1-220-878-81	s	RES, CHIP 22 (1005)
R630	1-208-887-81	s	RES, CHIP 1.0K (1005)
R631	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R632	1-208-899-81	s	RES, CHIP 3.3K (1005)
R633	1-208-871-81	s	RES, CHIP 220 (1005)
R636	1-208-879-81	s	RES, CHIP 470 (1005)
R637	1-208-879-81	s	RES, CHIP 470 (1005)
R638	1-208-879-81	s	RES, CHIP 470 (1005)
R639	1-208-911-81	s	RES, CHIP 10K (1005)
R640	1-208-911-81	s	RES, CHIP 10K (1005)
R641	1-208-911-81	s	RES, CHIP 10K (1005)
R642	1-208-919-81	s	RES, CHIP 22K (1005)
R643	1-208-919-81	s	RES, CHIP 22K (1005)
R644	1-208-863-81	s	RES, CHIP 100 (1005)
R645	1-220-870-81	s	RES, CHIP 10 (1005)
R646	1-208-911-81	s	RES, CHIP 10K (1005)
R647	1-208-911-81	s	RES, CHIP 10K (1005)
R648	1-208-855-81	s	RES, CHIP 47 (1005)
R649	1-208-855-81	s	RES, CHIP 47 (1005)
R650	1-208-855-81	s	RES, CHIP 47 (1005)
R651	1-208-855-81	s	RES, CHIP 47 (1005)
R652	1-208-855-81	s	RES, CHIP 47 (1005)
R653	1-208-855-81	s	RES, CHIP 47 (1005)
R654	1-208-855-81	s	RES, CHIP 47 (1005)
R656	1-208-855-81	s	RES, CHIP 47 (1005)
R657	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R658	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R659	1-208-855-81	s	RES, CHIP 47 (1005)
R660	1-220-870-81	s	RES, CHIP 10 (1005)
R662	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R663	1-208-855-81	s	RES, CHIP 47 (1005)
R664	1-208-855-81	s	RES, CHIP 47 (1005)
R665	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R666	1-208-863-81	s	RES, CHIP 100 (1005)
R667	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R668	1-208-935-81	s	RES, CHIP 100K (1005)
R669	1-208-935-81	s	RES, CHIP 100K (1005)

(DCP-37A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R670	1-208-935-81	s	RES, CHIP 100K (1005)
R671	1-208-935-81	s	RES, CHIP 100K (1005)
R672	1-208-935-81	s	RES, CHIP 100K (1005)
R673	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R675	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R677	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R679	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R681	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R682	1-208-871-81	s	RES, CHIP 220 (1005)
R683	1-208-855-81	s	RES, CHIP 47 (1005)
R685	1-208-879-81	s	RES, CHIP 470 (1005)
R686	1-208-879-81	s	RES, CHIP 470 (1005)
R687	1-208-879-81	s	RES, CHIP 470 (1005)
R691	1-208-919-81	s	RES, CHIP 22K (1005)
R692	1-208-911-81	s	RES, CHIP 10K (1005)
R693	1-208-919-81	s	RES, CHIP 22K (1005)
R694	1-208-911-81	s	RES, CHIP 10K (1005)
R695	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R731	1-208-895-81	s	RES, CHIP 2.2K (1005)
R732	1-208-895-81	s	RES, CHIP 2.2K (1005)
R733	1-208-895-81	s	RES, CHIP 2.2K (1005)
R734	1-208-895-81	s	RES, CHIP 2.2K (1005)
R735	1-208-895-81	s	RES, CHIP 2.2K (1005)
R736	1-208-895-81	s	RES, CHIP 2.2K (1005)
R737	1-208-871-81	s	RES, CHIP 220 (1005)
R738	1-208-871-81	s	RES, CHIP 220 (1005)
R739	1-208-871-81	s	RES, CHIP 220 (1005)
R744	1-208-895-81	s	RES, CHIP 2.2K (1005)
R745	1-208-895-81	s	RES, CHIP 2.2K (1005)
R746	1-208-895-81	s	RES, CHIP 2.2K (1005)
R747	1-208-879-81	s	RES, CHIP 470 (1005)
R748	1-208-879-81	s	RES, CHIP 470 (1005)
R749	1-208-879-81	s	RES, CHIP 470 (1005)
R750	1-220-870-81	s	RES, CHIP 10 (1005)
R751	1-208-887-81	s	RES, CHIP 1.0K (1005)
R752	1-208-860-81	s	RES, CHIP 75 (1005)
R753	1-208-860-81	s	RES, CHIP 75 (1005)
R754	1-208-860-81	s	RES, CHIP 75 (1005)
R755	1-208-871-81	s	RES, CHIP 220 (1005)
R756	1-208-860-81	s	RES, CHIP 75 (1005)
R757	1-208-860-81	s	RES, CHIP 75 (1005)
R758	1-208-860-81	s	RES, CHIP 75 (1005)
R759	1-208-911-81	s	RES, CHIP 10K (1005)
R760	1-208-911-81	s	RES, CHIP 10K (1005)
R761	1-208-919-81	s	RES, CHIP 22K (1005)
R762	1-208-911-81	s	RES, CHIP 10K (1005)
R764	1-220-878-81	s	RES, CHIP 22 (1005)
R765	1-208-911-81	s	RES, CHIP 10K (1005)
R766	1-208-919-81	s	RES, CHIP 22K (1005)
R767	1-208-903-81	s	RES, CHIP 4.7K (1005)
R768	1-220-878-81	s	RES, CHIP 22 (1005)
R769	1-220-870-81	s	RES, CHIP 10 (1005)
R770	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R771	1-208-887-81	s	RES, CHIP 1.0K (1005)
R773	1-208-903-81	s	RES, CHIP 4.7K (1005)
R774	1-208-903-81	s	RES, CHIP 4.7K (1005)
R775	1-208-903-81	s	RES, CHIP 4.7K (1005)
R776	1-208-903-81	s	RES, CHIP 4.7K (1005)
R777	1-208-903-81	s	RES, CHIP 4.7K (1005)

(DCP-37A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R778	1-208-903-81	s	RES, CHIP 4.7K (1005)
R779	1-208-895-81	s	RES, CHIP 2.2K (1005)
R780	1-208-895-81	s	RES, CHIP 2.2K (1005)
R781	1-208-895-81	s	RES, CHIP 2.2K (1005)
R782	1-208-871-81	s	RES, CHIP 220 (1005)
R783	1-208-871-81	s	RES, CHIP 220 (1005)
R784	1-208-871-81	s	RES, CHIP 220 (1005)
R785	1-208-903-81	s	RES, CHIP 4.7K (1005)
R786	1-208-903-81	s	RES, CHIP 4.7K (1005)
R787	1-208-903-81	s	RES, CHIP 4.7K (1005)
R788	1-208-887-81	s	RES, CHIP 1.0K (1005)
R789	1-208-887-81	s	RES, CHIP 1.0K (1005)
R790	1-208-887-81	s	RES, CHIP 1.0K (1005)
R791	1-208-891-81	s	RES, CHIP 1.5K (1005)
R792	1-208-891-81	s	RES, CHIP 1.5K (1005)
R793	1-208-891-81	s	RES, CHIP 1.5K (1005)
R794	1-208-855-81	s	RES, CHIP 47 (1005)
R795	1-208-855-81	s	RES, CHIP 47 (1005)
R796	1-208-855-81	s	RES, CHIP 47 (1005)
R797	1-208-895-81	s	RES, CHIP 2.2K (1005)
R798	1-208-879-81	s	RES, CHIP 470 (1005)
R803	1-220-878-81	s	RES, CHIP 22 (1005)
R805	1-208-863-81	s	RES, CHIP 100 (1005)
R901	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R902	1-208-887-81	s	RES, CHIP 1.0K (1005)
R903	1-208-919-81	s	RES, CHIP 22K (1005)
R904	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R905	1-208-879-81	s	RES, CHIP 470 (1005)
R906	1-208-903-81	s	RES, CHIP 4.7K (1005)
R907	1-208-919-81	s	RES, CHIP 22K (1005)
R908	1-208-887-81	s	RES, CHIP 1.0K (1005)
R909	1-208-927-81	s	RES, CHIP 47K (1005)
R910	1-208-895-81	s	RES, CHIP 2.2K (1005)
R911	1-208-919-81	s	RES, CHIP 22K (1005)
R912	1-208-919-81	s	RES, CHIP 22K (1005)
R913	1-208-887-81	s	RES, CHIP 1.0K (1005)
R914	1-208-887-81	s	RES, CHIP 1.0K (1005)
R916	1-208-887-81	s	RES, CHIP 1.0K (1005)
R918	1-208-887-81	s	RES, CHIP 1.0K (1005)
R920	1-208-911-81	s	RES, CHIP 10K (1005)
R921	1-208-911-81	s	RES, CHIP 10K (1005)
R922	1-220-870-81	s	RES, CHIP 10 (1005)
R923	1-208-903-81	s	RES, CHIP 4.7K (1005)
R924	1-208-919-81	s	RES, CHIP 22K (1005)
R929	1-208-863-81	s	RES, CHIP 100 (1005)
R930	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R931	1-208-871-81	s	RES, CHIP 220 (1005)
R932	1-208-911-81	s	RES, CHIP 10K (1005)
R934	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R950	1-208-855-81	s	RES, CHIP 47 (1005)
R951	1-208-887-81	s	RES, CHIP 1.0K (1005)
R952	1-208-911-81	s	RES, CHIP 10K (1005)
R953	1-208-911-81	s	RES, CHIP 10K (1005)
R954	1-208-863-81	s	RES, CHIP 100 (1005)
R955	1-208-863-81	s	RES, CHIP 100 (1005)
R958	1-208-863-81	s	RES, CHIP 100 (1005)
R960	1-208-855-81	s	RES, CHIP 47 (1005)
R961	1-208-855-81	s	RES, CHIP 47 (1005)
R970	1-220-878-81	s	RES, CHIP 22 (1005)

(DCP-37A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R971	1-208-863-81	s	RES, CHIP 100 (1005)
R972	1-208-943-81	s	RES, CHIP 220K (1005)
R973	1-208-911-81	s	RES, CHIP 10K (1005)
R974	1-208-911-81	s	RES, CHIP 10K (1005)
R976	1-208-911-81	s	RES, CHIP 10K (1005)
R977	1-208-887-81	s	RES, CHIP 1.0K (1005)
R979	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R981	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R982	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R983	1-208-863-81	s	RES, CHIP 100 (1005)
R984	1-208-863-81	s	RES, CHIP 100 (1005)
R985	1-208-935-81	s	RES, CHIP 100K (1005)
R986	1-208-887-81	s	RES, CHIP 1.0K (1005)
R987	1-208-915-81	s	RES, CHIP 15K (1005)
R989	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R990	1-208-887-81	s	RES, CHIP 1.0K (1005)
R992	1-208-887-81	s	RES, CHIP 1.0K (1005)
R994	1-208-887-81	s	RES, CHIP 1.0K (1005)
R995	1-208-887-81	s	RES, CHIP 1.0K (1005)
R996	1-208-927-81	s	RES, CHIP 47K (1005)
R997	1-218-990-81	s	CONDUCTOR, CHIP (1005)
RB1	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB2	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB3	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB4	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB5	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB6	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB7	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB8	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB9	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB10	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB11	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB12	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB13	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB14	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB15	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB16	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB17	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB18	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB200	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB201	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB202	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB203	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB204	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB205	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB206	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB207	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB208	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB209	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB210	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB211	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB212	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB213	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB214	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB215	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB216	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB217	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB218	1-234-372-21	s	RES, NETWORK 100 (1005X4)

(DCP-37A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB219	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB220	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB221	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB222	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB223	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB224	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB225	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB226	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB227	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB228	1-234-369-21	s	RES, NETWORK 10 (1005X4)
RB229	1-234-369-21	s	RES, NETWORK 10 (1005X4)
RB230	1-234-369-21	s	RES, NETWORK 10 (1005X4)
RB231	1-234-369-21	s	RES, NETWORK 10 (1005X4)
RB232	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB233	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB234	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB235	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB236	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB237	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB238	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB239	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB401	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB402	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB403	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB404	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB405	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB406	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB407	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB408	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB409	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB410	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB411	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB412	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB414	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB415	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB416	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB417	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB418	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB419	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB420	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB421	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB422	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB423	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB424	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB425	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB426	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB427	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB428	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB429	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB430	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB431	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB500	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB501	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB504	1-234-369-21	s	RES, NETWORK 10 (1005X4)
RB505	1-234-369-21	s	RES, NETWORK 10 (1005X4)
RB509	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB510	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB511	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB512	1-234-381-21	s	RES, NETWORK 100K (1005X4)

(DCP-37A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB513	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB514	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB515	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB516	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB517	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB521	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB522	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB523	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB525	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB526	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB527	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB529	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB530	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB531	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB532	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB533	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB539	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB540	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB541	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB542	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB543	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB544	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB546	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB547	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB548	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB549	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB550	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB551	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB552	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB554	1-234-369-21	s	RES, NETWORK 10 (1005X4)
RB555	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB556	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB557	1-234-369-21	s	RES, NETWORK 10 (1005X4)
RB558	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB559	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB560	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB561	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB562	1-234-369-21	s	RES, NETWORK 10 (1005X4)
RB565	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB566	1-234-369-21	s	RES, NETWORK 10 (1005X4)
RB568	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB569	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB570	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB576	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB577	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB578	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB579	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB580	1-234-369-21	s	RES, NETWORK 10 (1005X4)
RB581	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB582	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB583	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB600	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB601	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB602	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB603	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB604	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB605	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB606	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB607	1-234-369-21	s	RES, NETWORK 10 (1005X4)

(DCP-37A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB608	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB609	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB610	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB611	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB612	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB747	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB748	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB749	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB900	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB901	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB902	1-234-372-21	s	RES, NETWORK 100 (1005X4)
S501	1-692-271-41	s	SWITCH, SLIDE
THP400	1-803-353-21	s	THERMISTOR, POSITIVE
X401	1-795-561-21	s	VIBRATOR, CERAMIC
X600	1-795-831-12	s	OSCILLATOR, CRYSTAL (VCXO)3.3V
X601	1-795-670-12	s	OSCILLATOR, CRYSTAL (VCXO)3.3V
X602	1-795-671-12	s	OSCILLATOR, CRYSTAL (VCXO)3.3V

DET-43G BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1156-237-A	s	MOUNTED CIRCUIT BOARD, DET-43G
S1	1-771-338-41	s	SWITCH, PUSH
S2	1-771-040-41	s	SWITCH, PUSH

DF-64 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1144-557-A	s	MOUNTED CIRCUIT BOARD, DF-64
R254	1-216-837-91	s	RES, CHIP 22K (1608)
R255	1-216-836-91	s	RES, CHIP 18K (1608)
R257	1-216-837-91	s	RES, CHIP 22K (1608)
R258	1-216-837-91	s	RES, CHIP 22K (1608)
RV205	1-225-791-21	s	RES, ADJ, CERMET 5K
S201	1-570-985-11	s	SWITCH, TOGGLE
S202	1-570-984-11	s	SWITCH, TOGGLE
S203	1-572-834-21	s	SWITCH, SLIDE

DIF-167 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1164-278-A	s	MOUNTED CIRCUIT BOARD, DIF-167
C1	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C3	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C5	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C6	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C7	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C8	1-100-880-91	s	CAP, CERAMIC 100MF C (3225)
C9	1-100-880-91	s	CAP, CERAMIC 100MF C (3225)
C10	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C12	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C14	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C15	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C16	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C17	1-100-880-91	s	CAP, CERAMIC 100MF C (3225)
C18	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C19	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C20	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C21	1-100-880-91	s	CAP, CERAMIC 100MF C (3225)
C22	1-100-880-91	s	CAP, CERAMIC 100MF C (3225)
C23	1-100-880-91	s	CAP, CERAMIC 100MF C (3225)
C24	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C25	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
CN1	1-817-097-21	o	PIN, CONNECTOR (1.5MM)(SMD)13P
CN2	1-778-650-31	s	CONNECTOR, FFC/FPC(ZIF) ST 30P
CN3	1-820-030-11	s	PIN, CONNECTOR (1.5MM)(SMD) 9P
CN4	1-820-176-11	s	PIN, CONNECTOR (1.5MM) 10P
CN5	1-820-177-11	s	PIN, CONNECTOR (1.5MM) 11P
IC1	6-702-481-01	s	IC PCA9555DB-118
IC2	8-759-144-72	s	IC UPC358G2-E2
IC3	6-707-885-01	s	IC TC74VHCT08AFT(EKJ)
IC4	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC5	6-707-885-01	s	IC TC74VHCT08AFT(EKJ)
IC6	8-759-144-72	s	IC UPC358G2-E2
IC7	8-759-083-42	s	IC TC4W53FU(TE12R)
IC8	8-759-083-42	s	IC TC4W53FU(TE12R)
IC9	8-759-144-72	s	IC UPC358G2-E2
Q1	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q2	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q3	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q4	8-729-928-82	s	TRANSISTOR DTC144EE-TL
R1	1-208-935-81	s	RES, CHIP 100K (1005)
R2	1-208-935-81	s	RES, CHIP 100K (1005)
R3	1-208-935-81	s	RES, CHIP 100K (1005)
R4	1-208-935-81	s	RES, CHIP 100K (1005)
R5	1-208-887-81	s	RES, CHIP 1.0K (1005)
R6	1-208-887-81	s	RES, CHIP 1.0K (1005)
R7	1-208-935-81	s	RES, CHIP 100K (1005)
R8	1-208-903-81	s	RES, CHIP 4.7K (1005)
R9	1-208-935-81	s	RES, CHIP 100K (1005)
R10	1-208-935-81	s	RES, CHIP 100K (1005)
R11	1-208-911-81	s	RES, CHIP 10K (1005)
R12	1-208-919-81	s	RES, CHIP 22K (1005)
R13	1-208-935-81	s	RES, CHIP 100K (1005)
R14	1-208-879-81	s	RES, CHIP 470 (1005)
R15	1-208-879-81	s	RES, CHIP 470 (1005)

(DIF-167 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R16	1-208-887-81	s	RES, CHIP 1.0K (1005)
R17	1-208-903-81	s	RES, CHIP 4.7K (1005)
R18	1-208-887-81	s	RES, CHIP 1.0K (1005)
R19	1-208-911-81	s	RES, CHIP 10K (1005)
R20	1-208-903-81	s	RES, CHIP 4.7K (1005)
R22	1-208-911-81	s	RES, CHIP 10K (1005)
R23	1-208-927-81	s	RES, CHIP 47K (1005)
R24	1-208-911-81	s	RES, CHIP 10K (1005)
R25	1-208-903-81	s	RES, CHIP 4.7K (1005)
R26	1-208-911-81	s	RES, CHIP 10K (1005)
R27	1-208-935-81	s	RES, CHIP 100K (1005)
R28	1-208-927-81	s	RES, CHIP 47K (1005)
R29	1-208-935-81	s	RES, CHIP 100K (1005)
R30	1-208-935-81	s	RES, CHIP 100K (1005)
R31	1-208-935-81	s	RES, CHIP 100K (1005)
R32	1-208-959-81	s	RES, CHIP 1M (1005)
R33	1-208-879-81	s	RES, CHIP 470 (1005)
R34	1-220-870-81	s	RES, CHIP 10 (1005)
R35	1-208-863-81	s	RES, CHIP 100 (1005)
RB1	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB2	1-234-381-21	s	RES, NETWORK 100K (1005X4)
VS1	1-476-807-31	s	SENSOR, ANGULAR VELOCITY
VS2	1-476-807-41	s	SENSOR, ANGULAR VELOCITY

DR-550G BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1138-490-A	s	MOUNTED CIRCUIT BOARD, DR-550G
C100	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C101	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C102	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C103	1-135-346-21	s	CAP, ELECT 39MF (6.3X6)
C104	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C105	1-135-346-21	s	CAP, ELECT 39MF (6.3X6)
C106	1-135-346-21	s	CAP, ELECT 39MF (6.3X6)
C107	1-135-346-21	s	CAP, ELECT 39MF (6.3X6)
C108	1-127-738-91	s	CAP, CERAMIC 4700000PF B(3225)
C109	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C110	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C111	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C112	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C113	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C114	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C115	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C116	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C117	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C200	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C201	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C202	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C203	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C204	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C205	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C206	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C207	1-164-847-81	s	CAP, CHIP CERAMIC 7PF CH 1005
C208	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C209	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C210	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C211	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C212	1-164-847-81	s	CAP, CHIP CERAMIC 7PF CH 1005
C213	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C214	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C215	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C216	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C217	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C218	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C219	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C220	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C221	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C222	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C223	1-100-620-91	s	CAP, CHIP CERAMIC 47MF B(3225)
C224	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C225	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C226	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C227	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C228	1-164-940-81	s	CAP,CHIP CERAMIC 3300PF B 1005
C229	1-100-620-91	s	CAP, CHIP CERAMIC 47MF B(3225)
C230	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C231	1-100-620-91	s	CAP, CHIP CERAMIC 47MF B(3225)
C232	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C233	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C234	1-100-620-91	s	CAP, CHIP CERAMIC 47MF B(3225)
C235	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C236	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C237	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C238	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005

(DR-550G BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C239	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C240	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C241	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C242	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C243	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C244	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C245	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C246	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C247	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C248	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C249	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C250	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C251	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C252	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C253	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C254	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C255	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C300	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C301	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C302	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C303	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C304	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C305	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C306	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C307	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C308	1-164-847-81	s	CAP, CHIP CERAMIC 7PF CH 1005
C309	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C310	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C311	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C312	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C313	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C314	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C315	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C316	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C317	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C318	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C319	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C320	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C321	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C322	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C323	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C324	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C325	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C326	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C327	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C328	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C329	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C330	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C331	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C332	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C333	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C334	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C335	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C336	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C337	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C400	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C401	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C402	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C403	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005

(DR-550G BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C404	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C405	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C406	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C407	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C408	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C409	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C410	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C411	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C412	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C413	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C414	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C415	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C416	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C417	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C418	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C419	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C420	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C421	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C422	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C423	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C424	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C425	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C426	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C427	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C428	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C429	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C430	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C431	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C432	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C433	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C434	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C435	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C436	1-164-882-81	s	CAP,CHIP CERAMIC 220PF CH 1005
C437	1-164-882-81	s	CAP,CHIP CERAMIC 220PF CH 1005
C438	1-164-882-81	s	CAP,CHIP CERAMIC 220PF CH 1005
C439	1-164-882-81	s	CAP,CHIP CERAMIC 220PF CH 1005
C440	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C441	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C442	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C500	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C501	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C502	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C503	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C504	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C506	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C507	1-107-826-91	s	CAP, CHIP CERAMIC 100000PF B
C508	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C509	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C510	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C511	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C512	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C513	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C514	1-135-346-21	s	CAP, ELECT 39MF (6.3X6)
C515	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C516	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C517	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C518	1-164-936-81	s	CAP, CHIP CERAMIC 680PF B 1005
C519	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C520	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005

(DR-550G BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C521	1-164-878-81	s	CAP,CHIP CERAMIC 150PF CH 1005
C522	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C523	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C524	1-107-826-91	s	CAP, CHIP CERAMIC 100000PF B
C525	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C526	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C527	1-107-826-91	s	CAP, CHIP CERAMIC 100000PF B
C528	1-135-346-21	s	CAP, ELECT 39MF (6.3X6)
C529	1-107-826-91	s	CAP, CHIP CERAMIC 100000PF B
C530	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C531	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C532	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C533	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C534	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C535	1-107-826-91	s	CAP, CHIP CERAMIC 100000PF B
C536	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C537	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C538	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C539	1-127-715-91	s	CAP,CHIP CERAMIC 0.22MF B 1608
C540	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C541	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C542	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C543	1-107-826-91	s	CAP, CHIP CERAMIC 100000PF B
C544	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C545	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C546	1-107-826-91	s	CAP, CHIP CERAMIC 100000PF B
C547	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C548	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C549	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C550	1-107-826-91	s	CAP, CHIP CERAMIC 100000PF B
C551	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C552	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C553	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C554	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C555	1-107-826-91	s	CAP, CHIP CERAMIC 100000PF B
C556	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C600	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C601	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C602	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C603	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C604	1-164-854-81	s	CAP, CHIP CERAMIC 15PF CH 1005
C605	1-164-854-81	s	CAP, CHIP CERAMIC 15PF CH 1005
C606	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C607	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C608	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C609	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C610	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C611	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C612	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C613	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C614	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C615	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C616	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C617	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C618	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C619	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C620	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C621	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C622	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005

(DR-550G BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C623	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C624	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C625	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C626	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C627	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C628	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C629	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C630	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C631	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C632	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C633	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C634	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C635	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C636	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C700	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C701	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C702	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C703	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C704	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C705	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C706	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C707	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C708	1-164-882-81	s	CAP,CHIP CERAMIC 220PF CH 1005
C709	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3225
C710	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C711	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C712	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C713	1-164-847-81	s	CAP, CHIP CERAMIC 7PF CH 1005
C714	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C715	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C716	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C717	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C718	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C719	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C720	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C721	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C722	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C723	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C724	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C725	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C726	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C727	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C728	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C729	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C730	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C900	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C901	1-164-862-81	s	CAP, CHIP CERAMIC 33PF CH 1005
C902	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C903	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C904	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3225
C905	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C906	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C907	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C908	1-164-847-81	s	CAP, CHIP CERAMIC 7PF CH 1005
C909	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C910	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C911	1-164-847-81	s	CAP, CHIP CERAMIC 7PF CH 1005
C912	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C913	1-164-862-81	s	CAP, CHIP CERAMIC 33PF CH 1005

(DR-550G BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C914	1-127-738-91	s	CAP, CERAMIC 4700000PF B(3225)
C915	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
CN100	1-815-889-21	s	PIN, CONNECTOR (PC BOARD) 14P
CN101	1-816-126-61	s	CONNECTOR, FFC/FPC
CN102	1-779-730-61	s	CONNECTOR, FFC/FPC (ZIF) 24P
CN103	1-816-126-61	s	CONNECTOR, FFC/FPC
CN104	1-766-431-51	s	HOUSING, CONNECTOR 30P
CN105	1-778-652-31	s	CONNECTOR, FFC (ZIF) 50P
CN106	1-580-056-21	s	PIN, CONNECTOR (SMD) 3P
CN200	1-764-243-31	o	CONNECTOR (COAXIAL)
CN231	1-764-081-21	s	PIN, CONNECTOR (PC BOARD) 9P
CN232	1-573-290-21	s	PIN, CONNECTOR (1.5MM) (SMD)4P
CN233	1-774-260-31	s	CONNECTOR, FFC/FPC(ZIF) AN 20P
D500	8-719-066-98	s	DIODE RB051L-40TE25
D501	8-719-069-28	s	DIODE 1SS400TE-61
D600	8-719-069-28	s	DIODE 1SS400TE-61
D900	8-719-421-68	s	DIODE MA132WK-TX
D901	8-719-066-98	s	DIODE RB051L-40TE25
D902	8-719-069-28	s	DIODE 1SS400TE-61
E1	1-535-757-21	s	CHIP, CHECKER
E2	1-535-757-21	s	CHIP, CHECKER
E3	1-535-757-21	s	CHIP, CHECKER
E4	1-535-757-21	s	CHIP, CHECKER
E5	1-535-757-21	s	CHIP, CHECKER
E6	1-535-757-21	s	CHIP, CHECKER
IC100	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC101	8-759-536-16	s	IC NJM319V(TE2)
IC200	8-753-221-60	s	IC CXA2686R-TL
IC201	8-759-687-37	s	IC OPA2340EA/2K5-S
IC202	8-759-687-37	s	IC OPA2340EA/2K5-S
IC203	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC204	8-759-687-37	s	IC OPA2340EA/2K5-S
IC205	8-759-590-34	s	IC ADS7841E/2K5
IC301	6-706-873-01	s	IC MT48LC4M16A2P-75:G
IC302	8-759-447-77	s	IC TC7WH74FU(TE12R)
IC303	6-706-476-01	s	IC TC7SET04FU(T5RSOJF)
IC304	6-704-512-01	s	IC TPS62050DGSR
IC400	6-707-372-01	s	IC TMC320BRD01
IC401	8-759-476-41	s	IC SN74LVCH16374ADGGR
IC402	8-759-523-01	s	IC TC74HC4052AFT(EL)
IC403	8-759-444-87	s	IC NJM324V(TE2)
IC404	8-759-687-37	s	IC OPA2340EA/2K5-S
IC405	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC406	6-706-476-01	s	IC TC7SET04FU(T5RSOJF)
IC407	8-759-687-37	s	IC OPA2340EA/2K5-S
IC408	6-706-476-01	s	IC TC7SET04FU(T5RSOJF)
IC409	6-706-476-01	s	IC TC7SET04FU(T5RSOJF)
IC410	6-706-476-01	s	IC TC7SET04FU(T5RSOJF)
IC411	8-759-679-05	s	IC TC7WH34FU(TE12R)
IC412	6-706-489-01	s	IC TC7SH32FU(T5RSOYJF)
IC500	6-705-074-01	s	IC BD6671FM
IC501	6-700-196-01	s	IC AN8499SH-E1V
IC502	8-759-668-90	s	IC NJW4301M-TE2
IC503	8-759-337-40	s	IC NJM2904V(TE2)
IC504	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC505	6-706-489-01	s	IC TC7SH32FU(T5RSOYJF)

(DR-550G BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC506	6-706-478-01	s	IC TC7SET08FU(T5RSOJF)
IC507	8-759-526-89	s	IC MB88347LPFV-ER
IC508	8-759-570-90	s	IC AD8032ARMZ
IC509	8-759-530-05	s	IC TC4053BFT(EL,N)
IC511	8-759-337-40	s	IC NJM2904V(TE2)
IC600	6-704-483-01	s	IC HD6417709SF100BV
IC601	6-706-155-01	s	IC MT48LC2M32B2P-6:G
IC603	6-702-168-01	s	IC AK6512CM-E2
IC604	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC605	6-702-749-01	s	IC S-80928CNNB-G8YT2G
IC606	6-704-490-01	s	IC S-80915CNNB-G8KT2G
IC607	8-759-497-44	s	IC TC7WH125FU(TE12R)
IC608	8-759-566-06	s	IC TC7WH08FU(TE12R)
IC609	8-759-656-54	s	IC TC7WH14FK(TE85R)
IC610	8-759-656-54	s	IC TC7WH14FK(TE85R)
IC611	6-706-488-01	s	IC TC7SH14FU(T5RSOYJF)
IC612	8-759-546-74	s	IC TC7WH157FU(TE12R)
IC701	6-706-488-01	s	IC TC7SH14FU(T5RSOYJF)
IC702	8-759-566-06	s	IC TC7WH08FU(TE12R)
IC703	8-759-531-92	s	IC TC7WH04FU(TE12R)
IC704	8-759-337-40	s	IC NJM2904V(TE2)
IC705	6-706-484-01	s	IC TC7SH04FU(T5RSOYJF)
IC706	6-706-489-01	s	IC TC7SH32FU(T5RSOYJF)
IC707	8-759-687-37	s	IC OPA2340EA/2K5-S
IC708	6-704-512-01	s	IC TPS62050DGSR
IC900	6-706-478-01	s	IC TC7SET08FU(T5RSOJF)
IC901	6-706-474-01	s	IC TC7SET00FU(T5RSOJF)
IC902	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC903	6-706-488-01	s	IC TC7SH14FU(T5RSOYJF)
IC904	8-759-586-19	s	IC TC7WH123FU(TE12R)
IC905	6-704-512-01	s	IC TPS62050DGSR
IC906	6-704-512-01	s	IC TPS62050DGSR
IC907	6-706-481-01	s	IC TC7SET32FU(T5RSOJF)
IC908	6-703-285-01	s	IC S-812C33AUA-C2NT2G
IC909	6-706-476-01	s	IC TC7SET04FU(T5RSOJF)
IC910	6-706-478-01	s	IC TC7SET08FU(T5RSOJF)
IC911	6-706-489-01	s	IC TC7SH32FU(T5RSOYJF)
L100	1-419-630-21	s	COIL, CHOKE 4.7UH
L200	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L201	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L202	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L300	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L301	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L302	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L400	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L401	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L500	1-419-630-21	s	COIL, CHOKE 4.7UH
L700	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L701	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L702	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L900	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L901	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L902	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
Q100	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q101	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q102	6-551-260-01	s	TRANSISTOR SI4403BDY-T1
Q103	6-551-265-01	s	TRANSISTOR SI2307BDS-T1
Q104	8-729-928-55	s	TRANSISTOR DTA123JE-TL

(DR-550G BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
Q501	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q502	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q503	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q504	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q505	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q506	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q507	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q508	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q509	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q510	6-551-260-01	s	TRANSISTOR SI4403BDY-T1
Q600	6-551-260-01	s	TRANSISTOR SI4403BDY-T1
Q601	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q700	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q701	6-551-265-01	s	TRANSISTOR SI2307BDS-T1
Q900	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q901	6-551-265-01	s	TRANSISTOR SI2307BDS-T1
Q902	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q903	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q904	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q905	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q906	8-729-929-09	s	TRANSISTOR DTC123JE-TL
R100	1-208-935-81	s	RES, CHIP 100K (1005)
R101	1-208-899-81	s	RES, CHIP 3.3K (1005)
R102	1-208-911-81	s	RES, CHIP 10K (1005)
R103	1-208-911-81	s	RES, CHIP 10K (1005)
R104	1-208-959-81	s	RES, CHIP 1M (1005)
R105	1-208-911-81	s	RES, CHIP 10K (1005)
R106	1-208-871-81	s	RES, CHIP 220 (1005)
R107	1-208-935-81	s	RES, CHIP 100K (1005)
R108	1-208-935-81	s	RES, CHIP 100K (1005)
R109	1-208-935-81	s	RES, CHIP 100K (1005)
R110	1-208-863-81	s	RES, CHIP 100 (1005)
R111	1-208-943-81	s	RES, CHIP 220K (1005)
R112	1-208-943-81	s	RES, CHIP 220K (1005)
R113	1-208-903-81	s	RES, CHIP 4.7K (1005)
R114	1-208-935-81	s	RES, CHIP 100K (1005)
R115	1-208-935-81	s	RES, CHIP 100K (1005)
R116	1-208-935-81	s	RES, CHIP 100K (1005)
R117	1-208-935-81	s	RES, CHIP 100K (1005)
R200	1-208-887-81	s	RES, CHIP 1.0K (1005)
R201	1-208-887-81	s	RES, CHIP 1.0K (1005)
R202	1-208-903-81	s	RES, CHIP 4.7K (1005)
R203	1-208-911-81	s	RES, CHIP 10K (1005)
R204	1-208-887-81	s	RES, CHIP 1.0K (1005)
R205	1-208-887-81	s	RES, CHIP 1.0K (1005)
R206	1-208-887-81	s	RES, CHIP 1.0K (1005)
R207	1-208-887-81	s	RES, CHIP 1.0K (1005)
R208	1-208-863-81	s	RES, CHIP 100 (1005)
R209	1-208-863-81	s	RES, CHIP 100 (1005)
R210	1-208-903-81	s	RES, CHIP 4.7K (1005)
R211	1-208-911-81	s	RES, CHIP 10K (1005)
R212	1-208-911-81	s	RES, CHIP 10K (1005)
R213	1-208-911-81	s	RES, CHIP 10K (1005)
R214	1-208-919-81	s	RES, CHIP 22K (1005)
R215	1-208-919-81	s	RES, CHIP 22K (1005)
R216	1-208-855-81	s	RES, CHIP 47 (1005)
R217	1-208-855-81	s	RES, CHIP 47 (1005)
R218	1-208-855-81	s	RES, CHIP 47 (1005)

(DR-550G BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R219	1-208-855-81	s	RES, CHIP 47 (1005)
R220	1-208-855-81	s	RES, CHIP 47 (1005)
R221	1-208-855-81	s	RES, CHIP 47 (1005)
R222	1-220-878-81	s	RES, CHIP 22 (1005)
R223	1-220-878-81	s	RES, CHIP 22 (1005)
R224	1-220-878-81	s	RES, CHIP 22 (1005)
R225	1-220-878-81	s	RES, CHIP 22 (1005)
R226	1-208-863-81	s	RES, CHIP 100 (1005)
R227	1-208-855-81	s	RES, CHIP 47 (1005)
R228	1-208-855-81	s	RES, CHIP 47 (1005)
R229	1-208-855-81	s	RES, CHIP 47 (1005)
R230	1-208-855-81	s	RES, CHIP 47 (1005)
R231	1-208-855-81	s	RES, CHIP 47 (1005)
R232	1-208-855-81	s	RES, CHIP 47 (1005)
R233	1-208-855-81	s	RES, CHIP 47 (1005)
R234	1-208-855-81	s	RES, CHIP 47 (1005)
R235	1-208-855-81	s	RES, CHIP 47 (1005)
R236	1-220-878-81	s	RES, CHIP 22 (1005)
R237	1-220-878-81	s	RES, CHIP 22 (1005)
R238	1-208-909-81	s	RES, CHIP 8.2K (1005)
R239	1-208-899-81	s	RES, CHIP 3.3K (1005)
R240	1-208-943-81	s	RES, CHIP 220K (1005)
R241	1-208-947-81	s	RES, CHIP 330K (1005)
R242	1-208-914-81	s	RES, CHIP 13K (1005)
R243	1-208-903-81	s	RES, CHIP 4.7K (1005)
R244	1-208-863-81	s	RES, CHIP 100 (1005)
R300	1-208-951-81	s	RES, CHIP 470K (1005)
R301	1-208-947-81	s	RES, CHIP 330K (1005)
R302	1-208-863-81	s	RES, CHIP 100 (1005)
R303	1-208-883-81	s	RES, CHIP 680 (1005)
R304	1-208-876-81	s	RES, CHIP 360 (1005)
R305	1-208-863-81	s	RES, CHIP 100 (1005)
R306	1-208-911-81	s	RES, CHIP 10K (1005)
R307	1-208-911-81	s	RES, CHIP 10K (1005)
R308	1-208-865-81	s	RES, CHIP 120 (1005)
R309	1-208-863-81	s	RES, CHIP 100 (1005)
R311	1-208-911-81	s	RES, CHIP 10K (1005)
R312	1-208-865-81	s	RES, CHIP 120 (1005)
R313	1-208-863-81	s	RES, CHIP 100 (1005)
R314	1-208-911-81	s	RES, CHIP 10K (1005)
R315	1-208-861-81	s	RES, CHIP 82 (1005)
R316	1-208-861-81	s	RES, CHIP 82 (1005)
R318	1-208-861-81	s	RES, CHIP 82 (1005)
R319	1-208-861-81	s	RES, CHIP 82 (1005)
R320	1-208-861-81	s	RES, CHIP 82 (1005)
R321	1-208-861-81	s	RES, CHIP 82 (1005)
R322	1-208-861-81	s	RES, CHIP 82 (1005)
R323	1-208-861-81	s	RES, CHIP 82 (1005)
R324	1-208-861-81	s	RES, CHIP 82 (1005)
R325	1-208-861-81	s	RES, CHIP 82 (1005)
R326	1-208-861-81	s	RES, CHIP 82 (1005)
R327	1-208-861-81	s	RES, CHIP 82 (1005)
R328	1-220-878-81	s	RES, CHIP 22 (1005)
R329	1-220-878-81	s	RES, CHIP 22 (1005)
R330	1-220-878-81	s	RES, CHIP 22 (1005)
R331	1-220-882-81	s	RES, CHIP 33 (1005)
R332	1-220-882-81	s	RES, CHIP 33 (1005)
R333	1-220-882-81	s	RES, CHIP 33 (1005)
R334	1-220-882-81	s	RES, CHIP 33 (1005)

(DR-550G BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R335	1-220-882-81	s	RES, CHIP 33 (1005)
R336	1-220-882-81	s	RES, CHIP 33 (1005)
R337	1-220-882-81	s	RES, CHIP 33 (1005)
R338	1-220-882-81	s	RES, CHIP 33 (1005)
R339	1-220-882-81	s	RES, CHIP 33 (1005)
R340	1-220-882-81	s	RES, CHIP 33 (1005)
R341	1-220-882-81	s	RES, CHIP 33 (1005)
R342	1-220-882-81	s	RES, CHIP 33 (1005)
R343	1-220-882-81	s	RES, CHIP 33 (1005)
R344	1-220-882-81	s	RES, CHIP 33 (1005)
R345	1-220-882-81	s	RES, CHIP 33 (1005)
R346	1-220-882-81	s	RES, CHIP 33 (1005)
R347	1-220-878-81	s	RES, CHIP 22 (1005)
R348	1-220-878-81	s	RES, CHIP 22 (1005)
R400	1-208-951-81	s	RES, CHIP 470K (1005)
R401	1-208-951-81	s	RES, CHIP 470K (1005)
R402	1-208-943-81	s	RES, CHIP 220K (1005)
R403	1-208-951-81	s	RES, CHIP 470K (1005)
R404	1-208-943-81	s	RES, CHIP 220K (1005)
R405	1-208-951-81	s	RES, CHIP 470K (1005)
R406	1-208-939-81	s	RES, CHIP 150K (1005)
R407	1-208-939-81	s	RES, CHIP 150K (1005)
R408	1-208-939-81	s	RES, CHIP 150K (1005)
R409	1-208-939-81	s	RES, CHIP 150K (1005)
R410	1-208-943-81	s	RES, CHIP 220K (1005)
R411	1-208-943-81	s	RES, CHIP 220K (1005)
R412	1-220-878-81	s	RES, CHIP 22 (1005)
R413	1-220-878-81	s	RES, CHIP 22 (1005)
R414	1-220-878-81	s	RES, CHIP 22 (1005)
R415	1-220-878-81	s	RES, CHIP 22 (1005)
R416	1-220-878-81	s	RES, CHIP 22 (1005)
R417	1-220-878-81	s	RES, CHIP 22 (1005)
R418	1-208-903-81	s	RES, CHIP 4.7K (1005)
R419	1-208-903-81	s	RES, CHIP 4.7K (1005)
R420	1-208-863-81	s	RES, CHIP 100 (1005)
R421	1-208-903-81	s	RES, CHIP 4.7K (1005)
R422	1-208-943-81	s	RES, CHIP 220K (1005)
R423	1-208-943-81	s	RES, CHIP 220K (1005)
R424	1-208-895-81	s	RES, CHIP 2.2K (1005)
R425	1-208-911-81	s	RES, CHIP 10K (1005)
R426	1-208-895-81	s	RES, CHIP 2.2K (1005)
R427	1-208-887-81	s	RES, CHIP 1.0K (1005)
R428	1-208-895-81	s	RES, CHIP 2.2K (1005)
R429	1-208-911-81	s	RES, CHIP 10K (1005)
R430	1-208-895-81	s	RES, CHIP 2.2K (1005)
R431	1-208-887-81	s	RES, CHIP 1.0K (1005)
R432	1-208-887-81	s	RES, CHIP 1.0K (1005)
R433	1-208-887-81	s	RES, CHIP 1.0K (1005)
R500	1-208-887-81	s	RES, CHIP 1.0K (1005)
R501	1-208-887-81	s	RES, CHIP 1.0K (1005)
R502	1-208-887-81	s	RES, CHIP 1.0K (1005)
R503	1-208-887-81	s	RES, CHIP 1.0K (1005)
R504	1-208-923-81	s	RES, CHIP 33K (1005)
R505	1-208-923-81	s	RES, CHIP 33K (1005)
R506	1-208-923-81	s	RES, CHIP 33K (1005)
R507	1-208-923-81	s	RES, CHIP 33K (1005)
R508	1-208-887-81	s	RES, CHIP 1.0K (1005)
R509	1-208-887-81	s	RES, CHIP 1.0K (1005)
R510	1-208-887-81	s	RES, CHIP 1.0K (1005)

(DR-550G BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R511	1-208-887-81	s	RES, CHIP 1.0K (1005)
R512	1-208-887-81	s	RES, CHIP 1.0K (1005)
R513	1-208-895-81	s	RES, CHIP 2.2K (1005)
R514	1-208-863-81	s	RES, CHIP 100 (1005)
R515	1-208-911-81	s	RES, CHIP 10K (1005)
R516	1-208-911-81	s	RES, CHIP 10K (1005)
R517	1-208-895-81	s	RES, CHIP 2.2K (1005)
R518	1-211-737-91	s	RES,SQUARE TYPE CHIP 0.47 3225
R519	1-211-737-91	s	RES,SQUARE TYPE CHIP 0.47 3225
R520	1-208-887-81	s	RES, CHIP 1.0K (1005)
R521	1-208-959-81	s	RES, CHIP 1M (1005)
R522	1-208-919-81	s	RES, CHIP 22K (1005)
R523	1-208-923-81	s	RES, CHIP 33K (1005)
R524	1-208-927-81	s	RES, CHIP 47K (1005)
R525	1-208-935-81	s	RES, CHIP 100K (1005)
R526	1-208-911-81	s	RES, CHIP 10K (1005)
R527	1-208-887-81	s	RES, CHIP 1.0K (1005)
R528	1-208-913-81	s	RES, CHIP 12K (1005)
R529	1-208-927-81	s	RES, CHIP 47K (1005)
R530	1-208-943-81	s	RES, CHIP 220K (1005)
R531	1-208-943-81	s	RES, CHIP 220K (1005)
R532	1-208-943-81	s	RES, CHIP 220K (1005)
R533	1-208-943-81	s	RES, CHIP 220K (1005)
R534	1-208-927-81	s	RES, CHIP 47K (1005)
R535	1-208-935-81	s	RES, CHIP 100K (1005)
R536	1-208-927-81	s	RES, CHIP 47K (1005)
R537	1-208-927-81	s	RES, CHIP 47K (1005)
R538	1-208-927-81	s	RES, CHIP 47K (1005)
R539	1-208-927-81	s	RES, CHIP 47K (1005)
R540	1-208-943-81	s	RES, CHIP 220K (1005)
R541	1-208-935-81	s	RES, CHIP 100K (1005)
R542	1-208-935-81	s	RES, CHIP 100K (1005)
R543	1-211-737-91	s	RES,SQUARE TYPE CHIP 0.47 3225
R544	1-211-969-91	s	RES, CHIP 10 (1608)
R545	1-211-737-91	s	RES,SQUARE TYPE CHIP 0.47 3225
R546	1-211-969-91	s	RES, CHIP 10 (1608)
R547	1-208-911-81	s	RES, CHIP 10K (1005)
R548	1-208-911-81	s	RES, CHIP 10K (1005)
R549	1-208-911-81	s	RES, CHIP 10K (1005)
R550	1-211-969-91	s	RES, CHIP 10 (1608)
R551	1-208-919-81	s	RES, CHIP 22K (1005)
R552	1-208-911-81	s	RES, CHIP 10K (1005)
R553	1-208-911-81	s	RES, CHIP 10K (1005)
R554	1-208-911-81	s	RES, CHIP 10K (1005)
R555	1-208-911-81	s	RES, CHIP 10K (1005)
R556	1-208-923-81	s	RES, CHIP 33K (1005)
R557	1-208-923-81	s	RES, CHIP 33K (1005)
R558	1-208-911-81	s	RES, CHIP 10K (1005)
R559	1-218-233-91	s	RES, SQUARE TYPE CHIP 47(4532)
R560	1-208-911-81	s	RES, CHIP 10K (1005)
R561	1-208-911-81	s	RES, CHIP 10K (1005)
R562	1-218-233-91	s	RES, SQUARE TYPE CHIP 47(4532)
R563	1-208-911-81	s	RES, CHIP 10K (1005)
R564	1-208-911-81	s	RES, CHIP 10K (1005)
R565	1-220-882-81	s	RES, CHIP 33 (1005)
R566	1-220-882-81	s	RES, CHIP 33 (1005)
R567	1-208-887-81	s	RES, CHIP 1.0K (1005)
R568	1-208-887-81	s	RES, CHIP 1.0K (1005)
R569	1-208-863-81	s	RES, CHIP 100 (1005)

(DR-550G BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R570	1-208-935-81	s	RES, CHIP 100K (1005)
R571	1-208-935-81	s	RES, CHIP 100K (1005)
R600	1-208-919-81	s	RES, CHIP 22K (1005)
R601	1-208-959-81	s	RES, CHIP 1M (1005)
R602	1-208-943-81	s	RES, CHIP 220K (1005)
R603	1-208-943-81	s	RES, CHIP 220K (1005)
R604	1-208-887-81	s	RES, CHIP 1.0K (1005)
R605	1-208-943-81	s	RES, CHIP 220K (1005)
R607	1-208-887-81	s	RES, CHIP 1.0K (1005)
R608	1-208-887-81	s	RES, CHIP 1.0K (1005)
R609	1-208-887-81	s	RES, CHIP 1.0K (1005)
R610	1-208-887-81	s	RES, CHIP 1.0K (1005)
R611	1-208-887-81	s	RES, CHIP 1.0K (1005)
R612	1-208-911-81	s	RES, CHIP 10K (1005)
R613	1-208-943-81	s	RES, CHIP 220K (1005)
R614	1-208-903-81	s	RES, CHIP 4.7K (1005)
R615	1-208-943-81	s	RES, CHIP 220K (1005)
R616	1-208-943-81	s	RES, CHIP 220K (1005)
R617	1-208-943-81	s	RES, CHIP 220K (1005)
R618	1-208-899-81	s	RES, CHIP 3.3K (1005)
R619	1-208-907-81	s	RES, CHIP 6.8K (1005)
R620	1-208-935-81	s	RES, CHIP 100K (1005)
R621	1-208-943-81	s	RES, CHIP 220K (1005)
R622	1-208-903-81	s	RES, CHIP 4.7K (1005)
R623	1-208-935-81	s	RES, CHIP 100K (1005)
R624	1-220-878-81	s	RES, CHIP 22 (1005)
R625	1-220-878-81	s	RES, CHIP 22 (1005)
R626	1-208-943-81	s	RES, CHIP 220K (1005)
R627	1-208-919-81	s	RES, CHIP 22K (1005)
R628	1-208-919-81	s	RES, CHIP 22K (1005)
R629	1-220-878-81	s	RES, CHIP 22 (1005)
R630	1-220-878-81	s	RES, CHIP 22 (1005)
R631	1-208-903-81	s	RES, CHIP 4.7K (1005)
R632	1-208-863-81	s	RES, CHIP 100 (1005)
R700	1-208-927-81	s	RES, CHIP 47K (1005)
R701	1-208-911-81	s	RES, CHIP 10K (1005)
R702	1-208-927-81	s	RES, CHIP 47K (1005)
R703	1-208-927-81	s	RES, CHIP 47K (1005)
R704	1-208-935-81	s	RES, CHIP 100K (1005)
R705	1-208-927-81	s	RES, CHIP 47K (1005)
R706	1-208-923-81	s	RES, CHIP 33K (1005)
R707	1-208-911-81	s	RES, CHIP 10K (1005)
R708	1-208-927-81	s	RES, CHIP 47K (1005)
R709	1-208-935-81	s	RES, CHIP 100K (1005)
R710	1-208-935-81	s	RES, CHIP 100K (1005)
R711	1-208-959-81	s	RES, CHIP 1M (1005)
R712	1-208-911-81	s	RES, CHIP 10K (1005)
R713	1-208-939-81	s	RES, CHIP 150K (1005)
R714	1-208-939-81	s	RES, CHIP 150K (1005)
R715	1-208-939-81	s	RES, CHIP 150K (1005)
R716	1-208-911-81	s	RES, CHIP 10K (1005)
R717	1-208-911-81	s	RES, CHIP 10K (1005)
R718	1-208-911-81	s	RES, CHIP 10K (1005)
R719	1-208-911-81	s	RES, CHIP 10K (1005)
R720	1-208-911-81	s	RES, CHIP 10K (1005)
R721	1-208-911-81	s	RES, CHIP 10K (1005)
R900	1-208-943-81	s	RES, CHIP 220K (1005)
R901	1-208-943-81	s	RES, CHIP 220K (1005)
R902	1-208-943-81	s	RES, CHIP 220K (1005)

(DR-550G BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R903	1-208-951-81	s	RES, CHIP 470K (1005)
R904	1-208-947-81	s	RES, CHIP 330K (1005)
R905	1-208-919-81	s	RES, CHIP 22K (1005)
R906	1-208-934-81	s	RES, CHIP 91K (1005)
R907	1-208-955-81	s	RES, CHIP 680K (1005)
R908	1-208-934-81	s	RES, CHIP 91K (1005)
R909	1-208-934-81	s	RES, CHIP 91K (1005)
R910	1-208-935-81	s	RES, CHIP 100K (1005)
R911	1-220-882-81	s	RES, CHIP 33 (1005)
R912	1-220-882-81	s	RES, CHIP 33 (1005)
R913	1-208-935-81	s	RES, CHIP 100K (1005)
R914	1-208-935-81	s	RES, CHIP 100K (1005)
RB100	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB101	1-234-382-21	s	RES, NETWORK 220K (1005X4)
RB102	1-234-382-21	s	RES, NETWORK 220K (1005X4)
RB300	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB301	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB302	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB303	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB304	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB305	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB306	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB307	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB308	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB309	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB310	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB311	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB312	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB401	1-234-377-21	s	RES, NETWORK 4.7K (1005X4)
RB402	1-234-377-21	s	RES, NETWORK 4.7K (1005X4)
RB403	1-234-377-21	s	RES, NETWORK 4.7K (1005X4)
RB404	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB405	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB406	1-234-377-21	s	RES, NETWORK 4.7K (1005X4)
RB407	1-234-377-21	s	RES, NETWORK 4.7K (1005X4)
RB408	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB409	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB410	1-234-382-21	s	RES, NETWORK 220K (1005X4)
RB411	1-234-382-21	s	RES, NETWORK 220K (1005X4)
RB412	1-234-382-21	s	RES, NETWORK 220K (1005X4)
RB600	1-234-382-21	s	RES, NETWORK 220K (1005X4)
RB601	1-234-377-21	s	RES, NETWORK 4.7K (1005X4)
RY500	1-755-380-21	s	RELAY
RY900	1-755-380-21	s	RELAY
S600	1-771-721-21	s	SWITCH, TACTILE
S601	1-692-270-41	s	SWITCH, SLIDE
THP500 ⚠	1-771-075-21	s	THERMISTOR, POSITIVE
TP1	1-535-757-21	s	CHIP, CHECKER
TP2	1-535-757-21	s	CHIP, CHECKER
TP3	1-535-757-21	s	CHIP, CHECKER
TP4	1-535-757-21	s	CHIP, CHECKER
X300	1-795-176-21	s	OSCILLATOR, CRYSTAL
X600	1-781-696-21	s	VIBRATOR, CRYSTAL (32.768 KHz)

DU-318 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1164-289-A	s	MOUNTED CIRCUIT BOARD, DU-318
C1	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
CN1	1-580-056-21	s	PIN, CONNECTOR (SMD) 3P
IC1	8-749-012-17	s	IC RS-140-T
R1	1-208-855-81	s	RES, CHIP 47 (1005)

DU-398 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
C1	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
IC1	8-759-447-77	s	IC TC7WH74FU(TE12R)
IC2	6-706-489-01	s	IC TC7SH32FU(T5RSOYJF)
IC3	6-707-863-01	s	IC TC74VHC08FT(EKJ)
IC4	8-759-524-48	s	IC TC74VHC393FT(EL)
IC5	8-759-524-48	s	IC TC74VHC393FT(EL)

DVP-29 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1169-368-A	s	MOUNTED CIRCUIT BOARD, DVP-29
3pcs	3-855-938-01	s	SCREW
C100	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C101	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C102	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C103	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C104	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C105	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C106	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C107	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C108	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C109	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C110	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C112	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C113	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C114	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C115	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C116	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C117	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C118	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C200	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C201	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C202	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C204	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C205	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C206	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C207	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C208	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C209	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C210	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C211	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C212	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C214	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C215	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C300	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C301	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C500	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C501	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C502	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C503	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C504	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C505	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C513	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C514	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C515	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C516	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C517	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C519	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C520	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C521	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C522	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C523	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C524	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C525	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C526	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C527	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C528	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C529	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(DVP-29 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C530	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C531	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C532	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C533	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C534	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C535	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C536	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C537	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C538	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C540	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C541	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C542	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C543	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C544	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C545	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C546	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C547	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C548	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C549	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C550	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C551	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C552	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C553	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C554	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C555	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C556	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C558	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C559	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C560	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C562	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C563	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C564	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C565	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C566	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C567	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C568	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C569	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C570	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C571	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C572	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C573	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C574	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C575	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C577	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C578	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C579	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C580	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C600	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C601	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C602	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C603	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C604	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C605	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C606	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C607	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C608	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C609	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C610	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C611	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(DVP-29 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C612	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C613	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C614	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C615	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C616	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C617	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C700	1-100-735-91	s	CAP, CERAMIC 10MF C (1608)
C701	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C702	1-100-352-91	s	CAP, CERAMIC 1MF C (1608)
C703	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C704	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C705	1-100-352-91	s	CAP, CERAMIC 1MF C (1608)
C706	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C707	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C708	1-100-352-91	s	CAP, CERAMIC 1MF C (1608)
C709	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C710	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C711	1-100-352-91	s	CAP, CERAMIC 1MF C (1608)
C712	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C713	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C714	1-100-735-91	s	CAP, CERAMIC 10MF C (1608)
C715	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C716	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C717	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C718	1-100-352-91	s	CAP, CERAMIC 1MF C (1608)
C719	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C720	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C721	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C722	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C723	1-100-352-91	s	CAP, CERAMIC 1MF C (1608)
C724	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C725	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C726	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C727	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C728	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C729	1-100-735-91	s	CAP, CERAMIC 10MF C (1608)
C730	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C731	1-100-352-91	s	CAP, CERAMIC 1MF C (1608)
C732	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C733	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C734	1-100-352-91	s	CAP, CERAMIC 1MF C (1608)
C735	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C736	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C737	1-100-352-91	s	CAP, CERAMIC 1MF C (1608)
C738	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C739	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C740	1-100-352-91	s	CAP, CERAMIC 1MF C (1608)
C741	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C742	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C743	1-100-352-91	s	CAP, CERAMIC 1MF C (1608)
C744	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C745	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C746	1-100-352-91	s	CAP, CERAMIC 1MF C (1608)
C747	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C748	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C749	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C752	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C800	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C801	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(DVP-29 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C802	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C803	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C805	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C807	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C808	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C809	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C810	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C811	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C812	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C813	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C814	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C815	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C816	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C817	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C818	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C819	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C820	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C821	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C822	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C823	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C824	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C825	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C826	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C827	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C828	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C829	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C830	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C831	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C832	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C833	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C834	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C835	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C836	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C837	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C838	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C839	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C840	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C841	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C900	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C901	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C902	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C903	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C905	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C907	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C908	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C909	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C910	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C911	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C912	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C913	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C914	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C915	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C916	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C917	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C918	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C919	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C920	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C921	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C922	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(DVP-29 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C923	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C924	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C925	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C926	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C927	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C928	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C929	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C930	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C931	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C932	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C933	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C934	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C935	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C936	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C937	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C938	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C939	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C940	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C1000	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1001	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1002	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1003	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1004	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1005	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1006	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1007	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1008	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1009	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1010	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1011	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1012	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1013	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1014	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1015	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1016	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1017	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1020	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1021	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1026	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1027	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1030	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C1031	1-164-862-81	s	CAP, CHIP CERAMIC 33PF CH 1005
C1032	1-164-862-81	s	CAP, CHIP CERAMIC 33PF CH 1005
C1033	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C1034	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C1035	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C1300	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C1301	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1302	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1308	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1309	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1310	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C1311	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1312	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1313	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1314	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1315	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1316	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1317	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(DVP-29 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1318	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1319	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1320	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1321	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1322	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1323	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1324	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1325	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1326	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1327	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1328	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1329	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1330	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1331	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1332	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1333	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1334	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1335	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1336	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1337	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1338	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1339	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1340	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1341	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1342	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1343	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1344	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1345	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C1346	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C1347	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1348	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C1349	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C1350	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C1400	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1401	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1402	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1403	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1404	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C1405	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1406	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1407	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1408	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1409	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1410	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1411	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1412	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1413	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1414	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1415	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1416	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1417	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1418	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1419	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1420	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1421	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1422	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1423	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1424	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1425	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(DVP-29 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1426	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1427	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1428	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1429	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1430	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1431	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1432	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1433	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1434	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1435	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1436	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1437	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1438	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1439	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1500	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1501	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1502	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1503	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1504	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1505	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1506	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1507	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1508	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1509	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1510	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1511	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1512	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1513	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1514	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1515	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1516	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1517	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1518	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1519	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1520	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1521	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1522	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1523	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1524	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1525	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1526	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1527	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1528	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1529	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1530	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1700	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1701	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1702	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1703	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1704	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1706	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1707	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C1708	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C1709	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C1710	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C1711	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1712	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1713	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C1714	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(DVP-29 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1715	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1718	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1719	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1720	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1721	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C1801	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1802	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1805	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C1809	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C1810	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1812	1-164-862-81	s	CAP, CHIP CERAMIC 33PF CH 1005
C1813	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C1900	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1901	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1902	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1903	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C1904	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1905	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1906	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1907	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1908	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1909	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1910	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1911	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1912	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1913	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1914	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1915	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1916	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1917	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1918	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2000	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2001	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2002	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2003	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2004	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2005	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2006	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2007	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2008	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2009	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2010	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2011	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2012	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2013	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2014	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2015	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2016	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C2017	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2018	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2019	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2020	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2021	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2022	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2023	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2024	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2025	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2026	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2027	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(DVP-29 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C2028	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2029	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2030	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
CN1401	1-778-652-31	s	CONNECTOR, FFC (ZIF) 50P
D200	8-719-024-71	s	DIODE 1SS362-TE85L
D201	8-719-024-71	s	DIODE 1SS362-TE85L
D202	8-719-024-71	s	DIODE 1SS362-TE85L
D203	8-719-024-71	s	DIODE 1SS362-TE85L
D204	8-719-024-71	s	DIODE 1SS362-TE85L
D205	8-719-024-71	s	DIODE 1SS362-TE85L
D400	8-719-074-31	s	DIODE CL-196YG-CD-T
D401	8-719-074-31	s	DIODE CL-196YG-CD-T
D402	8-719-074-31	s	DIODE CL-196YG-CD-T
D403	8-719-074-31	s	DIODE CL-196YG-CD-T
D404	8-719-074-31	s	DIODE CL-196YG-CD-T
D405	8-719-074-31	s	DIODE CL-196YG-CD-T
D406	8-719-074-31	s	DIODE CL-196YG-CD-T
D407	8-719-074-31	s	DIODE CL-196YG-CD-T
D700	8-719-074-31	s	DIODE CL-196YG-CD-T
D701	8-719-074-31	s	DIODE CL-196YG-CD-T
D702	8-719-074-31	s	DIODE CL-196YG-CD-T
D703	8-719-074-31	s	DIODE CL-196YG-CD-T
D704	8-719-074-31	s	DIODE CL-196YG-CD-T
D705	8-719-074-31	s	DIODE CL-196YG-CD-T
D706	8-719-074-31	s	DIODE CL-196YG-CD-T
D707	8-719-074-31	s	DIODE CL-196YG-CD-T
D708	8-719-074-31	s	DIODE CL-196YG-CD-T
D709	8-719-074-31	s	DIODE CL-196YG-CD-T
D1100	8-719-074-31	s	DIODE CL-196YG-CD-T
D1101	8-719-074-31	s	DIODE CL-196YG-CD-T
D1102	8-719-074-31	s	DIODE CL-196YG-CD-T
D1103	8-719-074-31	s	DIODE CL-196YG-CD-T
D1104	8-719-074-31	s	DIODE CL-196YG-CD-T
D1105	8-719-074-31	s	DIODE CL-196YG-CD-T
D1106	8-719-074-31	s	DIODE CL-196YG-CD-T
D1107	8-719-074-31	s	DIODE CL-196YG-CD-T
D1400	6-501-052-02	s	DIODE CL-197HB1-D-T
D1500	8-719-074-31	s	DIODE CL-196YG-CD-T
D1501	8-719-074-31	s	DIODE CL-196YG-CD-T
D2000	8-719-051-04	s	DIODE EC10QS04-TE12L5
E1700	1-535-757-21	s	CHIP, CHECKER
E1701	1-535-757-21	s	CHIP, CHECKER
E1702	1-535-757-21	s	CHIP, CHECKER
E1703	1-535-757-21	s	CHIP, CHECKER
E1704	1-535-757-21	s	CHIP, CHECKER
E1705	1-535-757-21	s	CHIP, CHECKER
E1706	1-535-757-21	s	CHIP, CHECKER
E1707	1-535-757-21	s	CHIP, CHECKER
FB100	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB101	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB102	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB500	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB501	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB502	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB503	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB504	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB505	1-469-094-21	s	FERRITE, EMI (SMD) (1608)

(DVP-29 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
FB506	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB600	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB601	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB602	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB603	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB604	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB700	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB701	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB800	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB801	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB802	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB803	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB804	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB807	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB808	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB809	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB900	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB901	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB902	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB903	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB904	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB907	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB908	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB1000	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB1001	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB1002	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB1300	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB1301	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB1302	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB1303	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1304	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB1305	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB1306	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB1500	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB1501	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB1502	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB1700	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB1701	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB1703	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB1704	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB1705	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB1706	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB1707	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB1708	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB1709	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB1710	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB1801	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB1900	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB1901	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
IC100	8-759-573-97	s	IC SN74LVC541APWR
IC101	8-759-573-97	s	IC SN74LVC541APWR
IC102	8-759-573-97	s	IC SN74LVC541APWR
IC103	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC104	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC105	8-759-497-44	s	IC TC7WH125FU(TE12R)
IC106	6-707-853-01	s	IC TC74LCX541FT(EKJ)
IC107	6-707-853-01	s	IC TC74LCX541FT(EKJ)
IC108	6-707-853-01	s	IC TC74LCX541FT(EKJ)
IC109	6-706-088-01	s	IC UPD6467GR-560-E2

(DVP-29 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC200	6-706-478-01	s	IC TC7SET08FU(T5RSOJF)
IC201	8-759-327-01	s	IC NJM062V(TE2)
IC202	8-759-646-99	s	IC NJM4556AV(TE2)
IC203	8-759-338-95	s	IC NJM2903V(TE2)
IC301	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC302	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC602	6-706-478-01	s	IC TC7SET08FU(T5RSOJF)
IC603	6-704-659-01	s	IC AD1896AYRSZRL
IC604	6-704-659-01	s	IC AD1896AYRSZRL
IC700	8-753-259-30	o	IC CXD3195GG-T6
IC803	8-753-230-99	s	IC CXD3161GL-T6
IC804	8-753-230-99	s	IC CXD3161GL-T6
IC805	8-759-675-47	s	IC SN74LVC04APWR
IC903	8-753-230-99	s	IC CXD3161GL-T6
IC904	8-753-230-99	s	IC CXD3161GL-T6
IC1002	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC1003	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC1004	6-706-484-01	s	IC TC7SH04FU(T5RSOYJF)
IC1005	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC1006	6-706-483-01	s	IC TC7SH02FU(T5RSOYJF)
IC1009	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC1010	6-706-879-01	s	IC TPS62020DRCR
IC1400	8-759-389-46	s	IC 74LCX16245MTDX
IC1401	8-759-389-46	s	IC 74LCX16245MTDX
IC1402	6-706-007-01	s	IC HY57V561620CTP-HDR
IC1403	6-706-007-01	s	IC HY57V561620CTP-HDR
IC1404	6-706-007-01	s	IC HY57V561620CTP-HDR
IC1405	6-706-007-01	s	IC HY57V561620CTP-HDR
IC1406	6-706-007-01	s	IC HY57V561620CTP-HDR
IC1407	6-706-007-01	s	IC HY57V561620CTP-HDR
IC1408	6-706-949-01	s	IC IDT71V416S12PHG-TL
IC1409	6-706-949-01	s	IC IDT71V416S12PHG-TL
IC1502	8-759-566-06	s	IC TC7WH08FU(TE12R)
IC1503	6-706-484-01	s	IC TC7SH04FU(T5RSOYJF)
IC1700	8-759-681-90	s	IC SC1565IS-2.5.TR
IC1701	6-708-538-01	s	IC CDCVF2510APWR
IC1702	6-703-875-01	s	IC CDCVF2505PWR
IC1703	6-703-875-01	s	IC CDCVF2505PWR
IC1709	6-706-484-01	s	IC TC7SH04FU(T5RSOYJF)
IC1710	6-706-484-01	s	IC TC7SH04FU(T5RSOYJF)
IC1711	6-706-484-01	s	IC TC7SH04FU(T5RSOYJF)
IC1712	6-706-484-01	s	IC TC7SH04FU(T5RSOYJF)
IC1802	6-704-566-01	s	IC R3112N291A-TR-FA
IC1804	6-704-099-01	s	IC TC7WZ08FK(TE85R)
IC1806	6-704-566-01	s	IC R3112N291A-TR-FA
IC1807	6-706-879-01	s	IC TPS62020DRCR
IC1901	6-708-425-01	s	IC S29AL008D70TFI010
IC1902	8-759-698-08	s	IC SN74CBTLV1G125DCKR
IC1903	6-708-493-01	s	IC HY57V281620ETP-HDR
IC1904	6-708-493-01	s	IC HY57V281620ETP-HDR
IC1905	8-759-497-44	s	IC TC7WH125FU(TE12R)
L100	1-412-959-21	s	INDUCTOR, SMALL TYPE 47UH 2520
L700	1-414-400-41	s	INDUCTOR (SMD) 22.0UH
L1000	1-416-344-21	s	COIL, CHOKE 10UH
L1700	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L1701	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L1702	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L1800	1-416-344-21	s	COIL, CHOKE 10UH

(DVP-29 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
Q200	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q201	8-729-048-50	s	TRANSISTOR 2SK3018-T106
Q1700	8-729-209-77	s	TRANSISTOR 2SC2873Y-TE12L
Q1803	6-550-832-01	s	TRANSISTOR SI2301BDS-T1
Q1805	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q1806	8-729-929-27	s	TRANSISTOR DTC114TE-TL
R100	1-220-878-81	s	RES, CHIP 22 (1005)
R101	1-220-878-81	s	RES, CHIP 22 (1005)
R102	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R103	1-220-870-81	s	RES, CHIP 10 (1005)
R104	1-220-870-81	s	RES, CHIP 10 (1005)
R105	1-220-878-81	s	RES, CHIP 22 (1005)
R106	1-220-878-81	s	RES, CHIP 22 (1005)
R110	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R111	1-208-943-81	s	RES, CHIP 220K (1005)
R112	1-208-943-81	s	RES, CHIP 220K (1005)
R113	1-208-943-81	s	RES, CHIP 220K (1005)
R114	1-208-943-81	s	RES, CHIP 220K (1005)
R115	1-220-878-81	s	RES, CHIP 22 (1005)
R116	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R117	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R119	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R120	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R121	1-220-878-81	s	RES, CHIP 22 (1005)
R122	1-220-878-81	s	RES, CHIP 22 (1005)
R125	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R127	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R128	1-220-878-81	s	RES, CHIP 22 (1005)
R129	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R130	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R131	1-208-911-81	s	RES, CHIP 10K (1005)
R138	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R139	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R140	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R141	1-208-927-81	s	RES, CHIP 47K (1005)
R142	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R143	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R200	1-208-899-81	s	RES, CHIP 3.3K (1005)
R202	1-208-927-81	s	RES, CHIP 47K (1005)
R203	1-208-927-81	s	RES, CHIP 47K (1005)
R204	1-208-911-81	s	RES, CHIP 10K (1005)
R205	1-208-860-81	s	RES, CHIP 75 (1005)
R206	1-208-895-81	s	RES, CHIP 2.2K (1005)
R207	1-208-895-81	s	RES, CHIP 2.2K (1005)
R208	1-208-927-81	s	RES, CHIP 47K (1005)
R209	1-208-919-81	s	RES, CHIP 22K (1005)
R210	1-208-935-81	s	RES, CHIP 100K (1005)
R211	1-208-911-81	s	RES, CHIP 10K (1005)
R212	1-208-959-81	s	RES, CHIP 1M (1005)
R213	1-208-935-81	s	RES, CHIP 100K (1005)
R214	1-208-887-81	s	RES, CHIP 1.0K (1005)
R215	1-208-959-81	s	RES, CHIP 1M (1005)
R216	1-208-903-81	s	RES, CHIP 4.7K (1005)
R217	1-208-935-81	s	RES, CHIP 100K (1005)
R218	1-208-897-81	s	RES, CHIP 2.7K (1005)
R219	1-208-863-81	s	RES, CHIP 100 (1005)
R220	1-208-903-81	s	RES, CHIP 4.7K (1005)
R221	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(DVP-29 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R222	1-208-927-81	s	RES, CHIP 47K (1005)
R223	1-208-919-81	s	RES, CHIP 22K (1005)
R302	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R303	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R304	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R305	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R306	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R307	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R308	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R309	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R310	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R311	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R312	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R313	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R314	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R315	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R316	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R400	1-208-895-81	s	RES, CHIP 2.2K (1005)
R401	1-208-895-81	s	RES, CHIP 2.2K (1005)
R402	1-208-895-81	s	RES, CHIP 2.2K (1005)
R403	1-208-895-81	s	RES, CHIP 2.2K (1005)
R404	1-208-895-81	s	RES, CHIP 2.2K (1005)
R405	1-208-895-81	s	RES, CHIP 2.2K (1005)
R406	1-208-895-81	s	RES, CHIP 2.2K (1005)
R407	1-208-895-81	s	RES, CHIP 2.2K (1005)
R409	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R410	1-208-927-81	s	RES, CHIP 47K (1005)
R411	1-220-878-81	s	RES, CHIP 22 (1005)
R412	1-220-878-81	s	RES, CHIP 22 (1005)
R500	1-208-911-81	s	RES, CHIP 10K (1005)
R501	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R502	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R503	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R504	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R505	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R506	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R507	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R508	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R509	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R510	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R511	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R512	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R513	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R514	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R515	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R516	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R517	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R518	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R519	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R520	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R521	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R522	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R523	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R524	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R525	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R528	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R529	1-208-911-81	s	RES, CHIP 10K (1005)
R530	1-208-927-81	s	RES, CHIP 47K (1005)
R532	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(DVP-29 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R600	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R601	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R602	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R603	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R604	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R605	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R606	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R608	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R609	1-208-927-81	s	RES, CHIP 47K (1005)
R700	1-220-870-81	s	RES, CHIP 10 (1005)
R701	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R702	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R703	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R705	1-220-870-81	s	RES, CHIP 10 (1005)
R706	1-220-870-81	s	RES, CHIP 10 (1005)
R707	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R708	1-208-887-81	s	RES, CHIP 1.0K (1005)
R709	1-208-887-81	s	RES, CHIP 1.0K (1005)
R710	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R711	1-208-927-81	s	RES, CHIP 47K (1005)
R712	1-208-927-81	s	RES, CHIP 47K (1005)
R713	1-208-927-81	s	RES, CHIP 47K (1005)
R714	1-208-927-81	s	RES, CHIP 47K (1005)
R715	1-208-927-81	s	RES, CHIP 47K (1005)
R716	1-208-927-81	s	RES, CHIP 47K (1005)
R717	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R718	1-220-870-81	s	RES, CHIP 10 (1005)
R719	1-208-927-81	s	RES, CHIP 47K (1005)
R720	1-208-927-81	s	RES, CHIP 47K (1005)
R800	1-220-878-81	s	RES, CHIP 22 (1005)
R803	1-208-911-81	s	RES, CHIP 10K (1005)
R804	1-208-911-81	s	RES, CHIP 10K (1005)
R805	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R806	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R807	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R808	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R809	1-208-911-81	s	RES, CHIP 10K (1005)
R810	1-208-911-81	s	RES, CHIP 10K (1005)
R811	1-208-911-81	s	RES, CHIP 10K (1005)
R812	1-208-911-81	s	RES, CHIP 10K (1005)
R813	1-208-911-81	s	RES, CHIP 10K (1005)
R814	1-208-911-81	s	RES, CHIP 10K (1005)
R815	1-208-911-81	s	RES, CHIP 10K (1005)
R816	1-208-911-81	s	RES, CHIP 10K (1005)
R817	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R818	1-208-911-81	s	RES, CHIP 10K (1005)
R819	1-208-911-81	s	RES, CHIP 10K (1005)
R820	1-208-867-81	s	RES, CHIP 150 (1005)
R821	1-208-867-81	s	RES, CHIP 150 (1005)
R822	1-208-867-81	s	RES, CHIP 150 (1005)
R823	1-208-867-81	s	RES, CHIP 150 (1005)
R824	1-208-943-81	s	RES, CHIP 220K (1005)
R825	1-208-943-81	s	RES, CHIP 220K (1005)
R826	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R829	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R830	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R831	1-208-943-81	s	RES, CHIP 220K (1005)
R832	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R833	1-208-943-81	s	RES, CHIP 220K (1005)

(DVP-29 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R834	1-208-927-81	s	RES, CHIP 47K (1005)
R835	1-208-927-81	s	RES, CHIP 47K (1005)
R836	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R837	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R838	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R839	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R840	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R900	1-220-878-81	s	RES, CHIP 22 (1005)
R901	1-208-911-81	s	RES, CHIP 10K (1005)
R902	1-208-911-81	s	RES, CHIP 10K (1005)
R903	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R904	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R905	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R906	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R907	1-208-911-81	s	RES, CHIP 10K (1005)
R908	1-208-911-81	s	RES, CHIP 10K (1005)
R909	1-208-911-81	s	RES, CHIP 10K (1005)
R910	1-208-911-81	s	RES, CHIP 10K (1005)
R911	1-208-911-81	s	RES, CHIP 10K (1005)
R912	1-208-911-81	s	RES, CHIP 10K (1005)
R913	1-208-911-81	s	RES, CHIP 10K (1005)
R914	1-208-911-81	s	RES, CHIP 10K (1005)
R915	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R916	1-208-911-81	s	RES, CHIP 10K (1005)
R917	1-208-911-81	s	RES, CHIP 10K (1005)
R918	1-208-867-81	s	RES, CHIP 150 (1005)
R919	1-208-867-81	s	RES, CHIP 150 (1005)
R920	1-208-867-81	s	RES, CHIP 150 (1005)
R921	1-208-867-81	s	RES, CHIP 150 (1005)
R922	1-208-943-81	s	RES, CHIP 220K (1005)
R923	1-208-943-81	s	RES, CHIP 220K (1005)
R924	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R927	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R928	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R929	1-208-943-81	s	RES, CHIP 220K (1005)
R930	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R931	1-208-943-81	s	RES, CHIP 220K (1005)
R932	1-208-927-81	s	RES, CHIP 47K (1005)
R933	1-208-927-81	s	RES, CHIP 47K (1005)
R934	1-208-935-81	s	RES, CHIP 100K (1005)
R1005	1-208-943-81	s	RES, CHIP 220K (1005)
R1008	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1009	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1010	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1011	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1022	1-208-951-81	s	RES, CHIP 470K (1005)
R1023	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1024	1-208-951-81	s	RES, CHIP 470K (1005)
R1026	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1027	1-208-927-81	s	RES, CHIP 47K (1005)
R1029	1-208-927-81	s	RES, CHIP 47K (1005)
R1100	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1101	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1102	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1103	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1104	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1105	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1106	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1107	1-208-887-81	s	RES, CHIP 1.0K (1005)

(DVP-29 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1108	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1109	1-220-870-81	s	RES, CHIP 10 (1005)
R1110	1-220-870-81	s	RES, CHIP 10 (1005)
R1111	1-220-870-81	s	RES, CHIP 10 (1005)
R1112	1-220-870-81	s	RES, CHIP 10 (1005)
R1113	1-220-870-81	s	RES, CHIP 10 (1005)
R1114	1-220-870-81	s	RES, CHIP 10 (1005)
R1115	1-220-870-81	s	RES, CHIP 10 (1005)
R1116	1-220-870-81	s	RES, CHIP 10 (1005)
R1117	1-220-870-81	s	RES, CHIP 10 (1005)
R1118	1-220-870-81	s	RES, CHIP 10 (1005)
R1119	1-220-870-81	s	RES, CHIP 10 (1005)
R1120	1-220-870-81	s	RES, CHIP 10 (1005)
R1200	1-208-927-81	s	RES, CHIP 47K (1005)
R1201	1-208-871-81	s	RES, CHIP 220 (1005)
R1202	1-208-927-81	s	RES, CHIP 47K (1005)
R1215	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1216	1-208-927-81	s	RES, CHIP 47K (1005)
R1217	1-208-927-81	s	RES, CHIP 47K (1005)
R1218	1-208-927-81	s	RES, CHIP 47K (1005)
R1219	1-208-927-81	s	RES, CHIP 47K (1005)
R1300	1-208-911-81	s	RES, CHIP 10K (1005)
R1301	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1302	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1303	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1304	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1305	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1306	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1307	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1308	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1309	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1310	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1311	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1312	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1313	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1314	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1315	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1316	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1317	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1318	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1319	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1320	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1321	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1322	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1323	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1324	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1325	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1326	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1327	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1328	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1329	1-208-911-81	s	RES, CHIP 10K (1005)
R1330	1-208-927-81	s	RES, CHIP 47K (1005)
R1331	1-220-878-81	s	RES, CHIP 22 (1005)
R1400	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1401	1-208-911-81	s	RES, CHIP 10K (1005)
R1402	1-208-911-81	s	RES, CHIP 10K (1005)
R1403	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1404	1-220-882-81	s	RES, CHIP 33 (1005)
R1405	1-220-882-81	s	RES, CHIP 33 (1005)

(DVP-29 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1406	1-220-882-81	s	RES, CHIP 33 (1005)
R1407	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1408	1-220-878-81	s	RES, CHIP 22 (1005)
R1409	1-220-878-81	s	RES, CHIP 22 (1005)
R1410	1-220-878-81	s	RES, CHIP 22 (1005)
R1411	1-220-882-81	s	RES, CHIP 33 (1005)
R1412	1-220-882-81	s	RES, CHIP 33 (1005)
R1413	1-220-882-81	s	RES, CHIP 33 (1005)
R1414	1-220-882-81	s	RES, CHIP 33 (1005)
R1415	1-220-882-81	s	RES, CHIP 33 (1005)
R1416	1-220-882-81	s	RES, CHIP 33 (1005)
R1417	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1418	1-208-911-81	s	RES, CHIP 10K (1005)
R1419	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1420	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1421	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1422	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1423	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1424	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1425	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1429	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1433	1-208-927-81	s	RES, CHIP 47K (1005)
R1434	1-208-927-81	s	RES, CHIP 47K (1005)
R1435	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1436	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1500	1-208-895-81	s	RES, CHIP 2.2K (1005)
R1501	1-208-927-81	s	RES, CHIP 47K (1005)
R1502	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1503	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1504	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1505	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1506	1-208-927-81	s	RES, CHIP 47K (1005)
R1507	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1508	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1509	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1510	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1511	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1512	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1513	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1514	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1515	1-208-927-81	s	RES, CHIP 47K (1005)
R1516	1-208-927-81	s	RES, CHIP 47K (1005)
R1517	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1518	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1519	1-208-895-81	s	RES, CHIP 2.2K (1005)
R1520	1-208-927-81	s	RES, CHIP 47K (1005)
R1521	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1522	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1523	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1524	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1525	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1526	1-208-927-81	s	RES, CHIP 47K (1005)
R1527	1-208-927-81	s	RES, CHIP 47K (1005)
R1528	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1529	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1530	1-208-927-81	s	RES, CHIP 47K (1005)
R1531	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1532	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1533	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(DVP-29 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1534	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1535	1-208-927-81	s	RES, CHIP 47K (1005)
R1536	1-208-927-81	s	RES, CHIP 47K (1005)
R1537	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1538	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1539	1-208-927-81	s	RES, CHIP 47K (1005)
R1540	1-208-927-81	s	RES, CHIP 47K (1005)
R1543	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1544	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1545	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1546	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1547	1-220-870-81	s	RES, CHIP 10 (1005)
R1548	1-208-927-81	s	RES, CHIP 47K (1005)
R1549	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1550	1-208-927-81	s	RES, CHIP 47K (1005)
R1551	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1552	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1553	1-208-927-81	s	RES, CHIP 47K (1005)
R1554	1-208-927-81	s	RES, CHIP 47K (1005)
R1555	1-208-927-81	s	RES, CHIP 47K (1005)
R1556	1-208-927-81	s	RES, CHIP 47K (1005)
R1557	1-208-927-81	s	RES, CHIP 47K (1005)
R1558	1-208-927-81	s	RES, CHIP 47K (1005)
R1559	1-208-927-81	s	RES, CHIP 47K (1005)
R1601	1-208-927-81	s	RES, CHIP 47K (1005)
R1603	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1604	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1605	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1700	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1701	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1702	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1703	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1704	1-220-878-81	s	RES, CHIP 22 (1005)
R1705	1-220-878-81	s	RES, CHIP 22 (1005)
R1706	1-220-878-81	s	RES, CHIP 22 (1005)
R1707	1-220-878-81	s	RES, CHIP 22 (1005)
R1708	1-220-878-81	s	RES, CHIP 22 (1005)
R1709	1-220-878-81	s	RES, CHIP 22 (1005)
R1710	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1711	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1712	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1715	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1716	1-208-895-81	s	RES, CHIP 2.2K (1005)
R1717	1-208-895-81	s	RES, CHIP 2.2K (1005)
R1718	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1719	1-208-927-81	s	RES, CHIP 47K (1005)
R1720	1-220-878-81	s	RES, CHIP 22 (1005)
R1721	1-220-878-81	s	RES, CHIP 22 (1005)
R1722	1-220-878-81	s	RES, CHIP 22 (1005)
R1723	1-220-878-81	s	RES, CHIP 22 (1005)
R1725	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1726	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1727	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1728	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1730	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1731	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1732	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1733	1-220-878-81	s	RES, CHIP 22 (1005)
R1734	1-220-878-81	s	RES, CHIP 22 (1005)

(DVP-29 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1738	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1739	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1800	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1801	1-208-927-81	s	RES, CHIP 47K (1005)
R1802	1-208-927-81	s	RES, CHIP 47K (1005)
R1803	1-208-927-81	s	RES, CHIP 47K (1005)
R1804	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1805	1-208-927-81	s	RES, CHIP 47K (1005)
R1807	1-208-911-81	s	RES, CHIP 10K (1005)
R1808	1-208-911-81	s	RES, CHIP 10K (1005)
R1809	1-208-911-81	s	RES, CHIP 10K (1005)
R1816	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1817	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1818	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1828	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1829	1-208-911-81	s	RES, CHIP 10K (1005)
R1830	1-208-927-81	s	RES, CHIP 47K (1005)
R1831	1-208-911-81	s	RES, CHIP 10K (1005)
R1832	1-208-927-81	s	RES, CHIP 47K (1005)
R1833	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1835	1-208-951-81	s	RES, CHIP 470K (1005)
R1836	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1837	1-208-947-81	s	RES, CHIP 330K (1005)
R1900	1-208-895-81	s	RES, CHIP 2.2K (1005)
R1901	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1903	1-208-895-81	s	RES, CHIP 2.2K (1005)
R1904	1-208-935-81	s	RES, CHIP 100K (1005)
R1905	1-208-935-81	s	RES, CHIP 100K (1005)
R1908	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1912	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1913	1-220-870-81	s	RES, CHIP 10 (1005)
R1914	1-220-870-81	s	RES, CHIP 10 (1005)
R1915	1-220-870-81	s	RES, CHIP 10 (1005)
R1916	1-220-870-81	s	RES, CHIP 10 (1005)
R1917	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1918	1-220-870-81	s	RES, CHIP 10 (1005)
R1919	1-220-870-81	s	RES, CHIP 10 (1005)
R1920	1-220-870-81	s	RES, CHIP 10 (1005)
R1921	1-220-870-81	s	RES, CHIP 10 (1005)
R1922	1-220-870-81	s	RES, CHIP 10 (1005)
R1923	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1924	1-220-870-81	s	RES, CHIP 10 (1005)
R1925	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1928	1-220-870-81	s	RES, CHIP 10 (1005)
R1930	1-220-870-81	s	RES, CHIP 10 (1005)
R1931	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1932	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1933	1-220-870-81	s	RES, CHIP 10 (1005)
R1935	1-220-870-81	s	RES, CHIP 10 (1005)
R1936	1-220-870-81	s	RES, CHIP 10 (1005)
R1943	1-220-870-81	s	RES, CHIP 10 (1005)
R1944	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1946	1-220-870-81	s	RES, CHIP 10 (1005)
R1947	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2004	1-208-911-81	s	RES, CHIP 10K (1005)
R2005	1-208-911-81	s	RES, CHIP 10K (1005)
R2006	1-220-870-81	s	RES, CHIP 10 (1005)
R2007	1-208-911-81	s	RES, CHIP 10K (1005)

(DVP-29 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB100	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB101	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB102	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB103	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB104	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB105	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB106	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB107	1-234-369-21	s	RES, NETWORK 10 (1005X4)
RB108	1-234-369-21	s	RES, NETWORK 10 (1005X4)
RB109	1-234-369-21	s	RES, NETWORK 10 (1005X4)
RB110	1-234-369-21	s	RES, NETWORK 10 (1005X4)
RB111	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB112	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB113	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB114	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB115	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB401	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB402	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB403	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB404	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB405	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB700	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB701	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB702	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB703	1-234-380-21	s	RES, NETWORK 47K (1005X4)
RB704	1-234-380-21	s	RES, NETWORK 47K (1005X4)
RB705	1-234-380-21	s	RES, NETWORK 47K (1005X4)
RB706	1-234-380-21	s	RES, NETWORK 47K (1005X4)
RB707	1-234-380-21	s	RES, NETWORK 47K (1005X4)
RB708	1-234-380-21	s	RES, NETWORK 47K (1005X4)
RB709	1-234-380-21	s	RES, NETWORK 47K (1005X4)
RB710	1-234-380-21	s	RES, NETWORK 47K (1005X4)
RB711	1-234-369-21	s	RES, NETWORK 10 (1005X4)
RB712	1-234-369-21	s	RES, NETWORK 10 (1005X4)
RB800	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB801	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB802	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB803	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB900	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB901	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB902	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB903	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1000	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1001	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1002	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1003	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1004	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1005	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1006	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1007	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1008	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1009	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1010	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1011	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1012	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1013	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1014	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1015	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1100	1-234-380-21	s	RES, NETWORK 47K (1005X4)

(DVP-29 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB1400	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1401	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1402	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1403	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1500	1-234-380-21	s	RES, NETWORK 47K (1005X4)
RB2000	1-234-369-21	s	RES, NETWORK 10 (1005X4)
X1500	1-795-739-22	s	CRYSTAL OSCILLATOR (SMD)
X1700	1-813-008-21	s	OSCILLATOR, CRYSTAL (SMD)

ENC-100 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1164-302-A	s	MOUNTED CIRCUIT BOARD, ENC-100
1pc	1-569-619-11	o	HOUSING, CONNECTOR 4P
1pc	1-569-682-11	o	HOUSING, CONNECTOR 4P
EN1	1-467-973-21	s	ENCODER, ROTARY

FP-144 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1169-369-A	s	MOUNTED CIRCUIT BOARD, FP-144
BT500	1-756-076-21	s	HOLDER, LITHIUM BATTERY
C2	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C6	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C7	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C8	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C9	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C10	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C11	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C12	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C13	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C14	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C15	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C16	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C17	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C18	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C19	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C20	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C21	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C22	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C23	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C24	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C25	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C26	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C27	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C28	1-126-390-21	s	CAP, CHIP ELECT 22MF (4X5.7)
C29	1-126-390-21	s	CAP, CHIP ELECT 22MF (4X5.7)
C30	1-126-390-21	s	CAP, CHIP ELECT 22MF (4X5.7)
C31	1-126-390-21	s	CAP, CHIP ELECT 22MF (4X5.7)
C50	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C51	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C52	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C53	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C54	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C55	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C56	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C57	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C58	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C59	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C60	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C61	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C62	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C200	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C201	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C202	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C203	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C204	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C205	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C206	1-126-390-21	s	CAP, CHIP ELECT 22MF (4X5.7)
C207	1-126-390-21	s	CAP, CHIP ELECT 22MF (4X5.7)
C208	1-126-390-21	s	CAP, CHIP ELECT 22MF (4X5.7)
C209	1-126-390-21	s	CAP, CHIP ELECT 22MF (4X5.7)
C210	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C211	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(FP-144 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C212	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C213	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C214	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C215	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C216	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C217	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C218	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C219	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C220	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C221	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C222	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C223	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C224	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C225	1-165-887-91	s	CAP, CERAMIC 0.22MF (1005)
C226	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C227	1-165-887-91	s	CAP, CERAMIC 0.22MF (1005)
C228	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C229	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C250	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C251	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C252	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C253	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C254	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C255	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C256	1-126-390-21	s	CAP, CHIP ELECT 22MF (4X5.7)
C257	1-126-390-21	s	CAP, CHIP ELECT 22MF (4X5.7)
C258	1-126-390-21	s	CAP, CHIP ELECT 22MF (4X5.7)
C259	1-126-390-21	s	CAP, CHIP ELECT 22MF (4X5.7)
C260	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C261	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C262	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C263	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C264	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C265	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C266	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C267	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C268	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C269	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C270	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C271	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C272	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C273	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C274	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C275	1-165-887-91	s	CAP, CERAMIC 0.22MF (1005)
C276	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C277	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C278	1-165-887-91	s	CAP, CERAMIC 0.22MF (1005)
C279	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C280	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C281	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C282	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C283	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C300	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C301	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C302	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C303	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C304	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C305	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C306	1-115-419-91	s	CAP,CHIP CERAMIC3300PF CH 2012

(FP-144 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C307	1-115-419-91	s	CAP,CHIP CERAMIC3300PF CH 2012
C308	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C309	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C310	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C311	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C312	1-164-882-81	s	CAP,CHIP CERAMIC 220PF CH 1005
C313	1-164-882-81	s	CAP,CHIP CERAMIC 220PF CH 1005
C314	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C315	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C316	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C317	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C318	1-128-360-21	s	CAP, CHIP CELECT 220MF
C319	1-128-360-21	s	CAP, CHIP CELECT 220MF
C320	1-128-360-21	s	CAP, CHIP CELECT 220MF
C321	1-128-360-21	s	CAP, CHIP CELECT 220MF
C322	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C323	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C324	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C325	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C326	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C327	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C328	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C329	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C330	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C331	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C332	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C333	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C400	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C401	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C402	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C403	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C404	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C405	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C406	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C407	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C408	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C409	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C410	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C411	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C412	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C413	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C414	1-127-760-91	s	CAP, CHIP CERAMIC 4.7MF B 2012
C415	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C416	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C417	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C418	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C419	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C421	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C422	1-131-661-21	s	CAP, CHIP ELECT 100MF(6.3X5.7)
C423	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C424	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C425	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C426	1-100-743-91	s	CAP, CERAMIC 2.2MF C (2012)
C427	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C428	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C429	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C430	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C431	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C432	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)

(FP-144 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C433	1-131-661-21	s	CAP, CHIP ELECT 100MF(6.3X5.7)
C434	1-131-661-21	s	CAP, CHIP ELECT 100MF(6.3X5.7)
C435	1-131-661-21	s	CAP, CHIP ELECT 100MF(6.3X5.7)
C436	1-131-661-21	s	CAP, CHIP ELECT 100MF(6.3X5.7)
C437	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C438	1-131-661-21	s	CAP, CHIP ELECT 100MF(6.3X5.7)
C500	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C501	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C502	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C503	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C504	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C505	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C506	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C507	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C508	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C509	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C510	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C511	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C512	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C513	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C514	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C515	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C516	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C517	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C518	1-104-609-21	s	CAP, CHIP ELECT 100MF (4X5.7)
C519	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C520	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C521	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C522	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C523	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C524	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C525	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C526	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C527	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C528	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C529	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C530	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C531	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C532	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C533	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C534	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C535	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C536	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C537	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C538	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C539	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C600	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C601	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C602	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C603	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C604	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C605	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C606	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C607	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C608	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C609	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C610	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C611	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C612	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)

(FP-144 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C613	1-100-743-91	s	CAP, CERAMIC 2.2MF C (2012)
C614	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C615	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C616	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C617	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
CN105	1-750-161-51	s	CONNECTOR, FPC 30P
CN106	1-750-161-51	s	CONNECTOR, FPC 30P
CN107	1-750-161-51	s	CONNECTOR, FPC 30P
CN400	1-569-775-21	o	PIN, CONNECTOR (SMD) 5P
CN401	1-580-055-21	o	PIN, CONNECTOR (SMD) 2P
CN500	1-573-290-21	s	PIN, CONNECTOR (1.5MM) (SMD)4P
CN501	1-573-290-21	s	PIN, CONNECTOR (1.5MM) (SMD)4P
CN502	1-580-056-21	s	PIN, CONNECTOR (SMD) 3P
CN600	1-817-194-21	s	PIN, CONNECTOR (SMD) 13P
CN601	1-580-756-21	s	PIN, CONNECTOR (SMD) 7P
CN602	1-794-997-21	s	PIN, CONNECTOR 20P
CN603	1-815-597-31	s	CONNECTOR, FFC/FPC (ZIF) AN 6P
D200	8-719-991-01	s	DIODE DAP222-TL
D201	8-719-991-01	s	DIODE DAP222-TL
D250	8-719-991-01	s	DIODE DAP222-TL
D251	8-719-991-01	s	DIODE DAP222-TL
D500	8-719-938-77	s	DIODE SB05-05C-TB-E
D501	8-719-938-77	s	DIODE SB05-05C-TB-E
D502	8-719-938-77	s	DIODE SB05-05C-TB-E
D503	8-719-938-77	s	DIODE SB05-05C-TB-E
D504	8-719-991-01	s	DIODE DAP222-TL
D505	8-719-077-09	s	DIODE CL-196HR-CD-T
D506	6-501-052-02	s	DIODE CL-197HB1-D-T
D507	8-719-077-09	s	DIODE CL-196HR-CD-T
D508	8-719-074-31	s	DIODE CL-196YG-CD-T
D509	8-719-074-31	s	DIODE CL-196YG-CD-T
D510	8-719-938-77	s	DIODE SB05-05C-TB-E
D600	8-719-938-77	s	DIODE SB05-05C-TB-E
E300	1-535-757-21	s	CHIP, CHECKER
E301	1-535-757-21	s	CHIP, CHECKER
E600	1-535-757-21	s	CHIP, CHECKER
E601	1-535-757-21	s	CHIP, CHECKER
IC1	8-759-523-01	s	IC TC74HC4052AFT(EL)
IC2	8-759-523-01	s	IC TC74HC4052AFT(EL)
IC3	8-759-523-01	s	IC TC74HC4052AFT(EL)
IC4	8-759-523-01	s	IC TC74HC4052AFT(EL)
IC5	8-759-422-21	s	IC NJM4580V(TE2)
IC6	8-759-422-21	s	IC NJM4580V(TE2)
IC7	8-759-422-21	s	IC NJM4580V(TE2)
IC50	8-759-422-21	s	IC NJM4580V(TE2)
IC51	8-759-422-21	s	IC NJM4580V(TE2)
IC54	8-759-564-49	s	IC TC7W53FU(TE12R)
IC55	8-759-564-49	s	IC TC7W53FU(TE12R)
IC56	8-759-564-49	s	IC TC7W53FU(TE12R)
IC57	8-759-564-49	s	IC TC7W53FU(TE12R)
IC58	6-707-893-01	s	IC TC74VHCT541AFT(EKJ)
IC200	8-759-422-21	s	IC NJM4580V(TE2)
IC201	8-759-422-21	s	IC NJM4580V(TE2)
IC202	8-759-697-17	s	IC AK5383VF-E2
IC250	8-759-422-21	s	IC NJM4580V(TE2)
IC251	8-759-422-21	s	IC NJM4580V(TE2)
IC252	8-759-697-17	s	IC AK5383VF-E2

(FP-144 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC300	8-759-447-77	s	IC TC7WH74FU(TE12R)
IC301	8-759-546-74	s	IC TC7WH157FU(TE12R)
IC302	6-701-111-01	s	IC AK4382AVT-E2
IC303	8-759-422-21	s	IC NJM4580V(TE2)
IC304	8-759-422-21	s	IC NJM4580V(TE2)
IC305	8-759-194-97	s	IC NJM4560M-D(TE2)
IC306	8-759-194-97	s	IC NJM4560M-D(TE2)
IC307	8-759-194-97	s	IC NJM4560M-D(TE2)
IC400	8-759-183-53	s	IC TL431CPK-E2
IC401	8-759-327-01	s	IC NJM062V(TE2)
IC402	6-704-960-01	s	IC NJM2172V(TE2)
IC403	8-759-327-01	s	IC NJM062V(TE2)
IC405	8-759-194-97	s	IC NJM4560M-D(TE2)
IC406	8-759-523-01	s	IC TC74HC4052AFT(EL)
IC407	6-706-476-01	s	IC TC7SET04FU(T5RSOJF)
IC500	8-759-564-49	s	IC TC7W53FU(TE12R)
IC501	8-759-564-49	s	IC TC7W53FU(TE12R)
IC502	8-759-337-40	s	IC NJM2904V(TE2)
IC503	6-708-478-01	s	IC RX-8025NB
IC504	8-759-337-40	s	IC NJM2904V(TE2)
IC506	8-759-678-06	s	IC CAT24WC02WI-TE13
IC507	6-704-566-01	s	IC R3112N291A-TR-FA
IC508	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC509	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC510	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC511	6-704-238-01	s	IC S-812C30AUA-C2KT2G
IC600	6-702-481-01	s	IC PCA9555DB-118
IC601	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC602	8-759-523-02	s	IC TC74HC4053AFT(EL)
IC603	8-759-327-01	s	IC NJM062V(TE2)
IC604	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
L400	1-469-549-21	s	INDUCTOR, CHIP 1.0UH (LB2016)
L401	1-469-549-21	s	INDUCTOR, CHIP 1.0UH (LB2016)
L500	1-469-549-21	s	INDUCTOR, CHIP 1.0UH (LB2016)
L600	1-469-549-21	s	INDUCTOR, CHIP 1.0UH (LB2016)
L601	1-469-549-21	s	INDUCTOR, CHIP 1.0UH (LB2016)
L602	1-469-549-21	s	INDUCTOR, CHIP 1.0UH (LB2016)
L603	1-469-549-21	s	INDUCTOR, CHIP 1.0UH (LB2016)
Q200	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q201	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q202	8-729-013-24	s	TRANSISTOR HN1C01FU-TE85R
Q203	8-729-013-24	s	TRANSISTOR HN1C01FU-TE85R
Q204	6-551-041-01	s	TRANSISTOR RN4904(T5RSONY,D,F)
Q205	6-550-832-01	s	TRANSISTOR SI2301BDS-T1
Q206	6-551-266-01	s	TRANSISTOR SI2304BDS-T1
Q207	6-551-041-01	s	TRANSISTOR RN4904(T5RSONY,D,F)
Q208	6-551-041-01	s	TRANSISTOR RN4904(T5RSONY,D,F)
Q209	6-551-041-01	s	TRANSISTOR RN4904(T5RSONY,D,F)
Q250	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q251	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q252	8-729-013-24	s	TRANSISTOR HN1C01FU-TE85R
Q253	8-729-013-24	s	TRANSISTOR HN1C01FU-TE85R
Q254	6-551-041-01	s	TRANSISTOR RN4904(T5RSONY,D,F)
Q255	6-550-832-01	s	TRANSISTOR SI2301BDS-T1
Q256	6-551-266-01	s	TRANSISTOR SI2304BDS-T1
Q300	6-551-041-01	s	TRANSISTOR RN4904(T5RSONY,D,F)
Q301	8-729-013-24	s	TRANSISTOR HN1C01FU-TE85R
Q302	8-729-013-24	s	TRANSISTOR HN1C01FU-TE85R

(FP-144 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
Q303	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q304	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q305	8-729-013-37	s	TRANSISTOR 2SC4213-AB-TE85L
Q306	8-729-013-37	s	TRANSISTOR 2SC4213-AB-TE85L
Q307	8-729-013-37	s	TRANSISTOR 2SC4213-AB-TE85L
Q308	8-729-013-37	s	TRANSISTOR 2SC4213-AB-TE85L
Q309	8-729-013-37	s	TRANSISTOR 2SC4213-AB-TE85L
Q310	8-729-013-37	s	TRANSISTOR 2SC4213-AB-TE85L
Q400	8-729-209-77	s	TRANSISTOR 2SC2873Y-TE12L
Q401	8-729-209-73	s	TRANSISTOR 2SA1213Y-TE12L
Q402	8-729-209-77	s	TRANSISTOR 2SC2873Y-TE12L
Q408	8-729-013-37	s	TRANSISTOR 2SC4213-AB-TE85L
Q409	8-729-013-37	s	TRANSISTOR 2SC4213-AB-TE85L
Q410	8-729-013-37	s	TRANSISTOR 2SC4213-AB-TE85L
Q411	8-729-013-37	s	TRANSISTOR 2SC4213-AB-TE85L
Q412	8-729-013-22	s	TRANSISTOR HN1A01FU-TE85R
Q414	6-551-041-01	s	TRANSISTOR RN4904(T5RSONY,D,F)
Q500	6-551-266-01	s	TRANSISTOR SI2304BDS-T1
Q501	6-550-980-01	s	TRANSISTOR RN1904(T5RSONY,D,F)
Q502	8-729-013-28	s	TRANSISTOR HN1B01FU-TE85R
Q503	6-550-832-01	s	TRANSISTOR SI2301BDS-T1
Q504	6-550-980-01	s	TRANSISTOR RN1904(T5RSONY,D,F)
Q505	6-550-980-01	s	TRANSISTOR RN1904(T5RSONY,D,F)
Q507	6-550-980-01	s	TRANSISTOR RN1904(T5RSONY,D,F)
Q508	6-551-266-01	s	TRANSISTOR SI2304BDS-T1
Q509	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q600	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q601	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q602	6-551-041-01	s	TRANSISTOR RN4904(T5RSONY,D,F)
R1	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2	1-208-927-81	s	RES, CHIP 47K (1005)
R3	1-208-899-81	s	RES, CHIP 3.3K (1005)
R4	1-208-899-81	s	RES, CHIP 3.3K (1005)
R7	1-208-903-81	s	RES, CHIP 4.7K (1005)
R8	1-208-935-81	s	RES, CHIP 100K (1005)
R9	1-208-935-81	s	RES, CHIP 100K (1005)
R10	1-208-903-81	s	RES, CHIP 4.7K (1005)
R13	1-208-935-81	s	RES, CHIP 100K (1005)
R14	1-208-935-81	s	RES, CHIP 100K (1005)
R15	1-208-895-81	s	RES, CHIP 2.2K (1005)
R16	1-208-895-81	s	RES, CHIP 2.2K (1005)
R17	1-208-895-81	s	RES, CHIP 2.2K (1005)
R18	1-208-895-81	s	RES, CHIP 2.2K (1005)
R19	1-208-895-81	s	RES, CHIP 2.2K (1005)
R20	1-208-895-81	s	RES, CHIP 2.2K (1005)
R21	1-208-895-81	s	RES, CHIP 2.2K (1005)
R22	1-208-895-81	s	RES, CHIP 2.2K (1005)
R23	1-208-895-81	s	RES, CHIP 2.2K (1005)
R24	1-208-895-81	s	RES, CHIP 2.2K (1005)
R25	1-208-895-81	s	RES, CHIP 2.2K (1005)
R26	1-208-895-81	s	RES, CHIP 2.2K (1005)
R27	1-208-895-81	s	RES, CHIP 2.2K (1005)
R28	1-208-895-81	s	RES, CHIP 2.2K (1005)
R29	1-208-895-81	s	RES, CHIP 2.2K (1005)
R30	1-208-895-81	s	RES, CHIP 2.2K (1005)
R50	1-208-935-81	s	RES, CHIP 100K (1005)
R51	1-208-935-81	s	RES, CHIP 100K (1005)
R52	1-208-935-81	s	RES, CHIP 100K (1005)
R53	1-208-935-81	s	RES, CHIP 100K (1005)

(FP-144 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R54	1-208-919-81	s	RES, CHIP 22K (1005)
R55	1-208-919-81	s	RES, CHIP 22K (1005)
R56	1-208-919-81	s	RES, CHIP 22K (1005)
R57	1-208-919-81	s	RES, CHIP 22K (1005)
R58	1-208-903-81	s	RES, CHIP 4.7K (1005)
R59	1-208-903-81	s	RES, CHIP 4.7K (1005)
R60	1-208-903-81	s	RES, CHIP 4.7K (1005)
R61	1-208-903-81	s	RES, CHIP 4.7K (1005)
R62	1-208-919-81	s	RES, CHIP 22K (1005)
R63	1-208-919-81	s	RES, CHIP 22K (1005)
R64	1-208-919-81	s	RES, CHIP 22K (1005)
R65	1-208-919-81	s	RES, CHIP 22K (1005)
R66	1-208-919-81	s	RES, CHIP 22K (1005)
R67	1-208-919-81	s	RES, CHIP 22K (1005)
R68	1-208-919-81	s	RES, CHIP 22K (1005)
R69	1-208-919-81	s	RES, CHIP 22K (1005)
R70	1-208-935-81	s	RES, CHIP 100K (1005)
R71	1-208-923-81	s	RES, CHIP 33K (1005)
R72	1-208-923-81	s	RES, CHIP 33K (1005)
R73	1-208-923-81	s	RES, CHIP 33K (1005)
R74	1-208-923-81	s	RES, CHIP 33K (1005)
R75	1-208-923-81	s	RES, CHIP 33K (1005)
R76	1-208-923-81	s	RES, CHIP 33K (1005)
R77	1-208-923-81	s	RES, CHIP 33K (1005)
R78	1-208-923-81	s	RES, CHIP 33K (1005)
R79	1-208-919-81	s	RES, CHIP 22K (1005)
R80	1-208-919-81	s	RES, CHIP 22K (1005)
R81	1-208-919-81	s	RES, CHIP 22K (1005)
R82	1-208-919-81	s	RES, CHIP 22K (1005)
R83	1-208-935-81	s	RES, CHIP 100K (1005)
R200	1-208-903-81	s	RES, CHIP 4.7K (1005)
R201	1-208-911-81	s	RES, CHIP 10K (1005)
R202	1-208-903-81	s	RES, CHIP 4.7K (1005)
R203	1-208-911-81	s	RES, CHIP 10K (1005)
R204	1-208-899-81	s	RES, CHIP 3.3K (1005)
R205	1-208-899-81	s	RES, CHIP 3.3K (1005)
R206	1-208-911-81	s	RES, CHIP 10K (1005)
R207	1-208-911-81	s	RES, CHIP 10K (1005)
R208	1-208-903-81	s	RES, CHIP 4.7K (1005)
R209	1-208-903-81	s	RES, CHIP 4.7K (1005)
R210	1-208-911-81	s	RES, CHIP 10K (1005)
R211	1-208-911-81	s	RES, CHIP 10K (1005)
R212	1-208-899-81	s	RES, CHIP 3.3K (1005)
R213	1-208-899-81	s	RES, CHIP 3.3K (1005)
R214	1-208-927-81	s	RES, CHIP 47K (1005)
R215	1-208-927-81	s	RES, CHIP 47K (1005)
R216	1-208-903-81	s	RES, CHIP 4.7K (1005)
R217	1-208-903-81	s	RES, CHIP 4.7K (1005)
R218	1-208-903-81	s	RES, CHIP 4.7K (1005)
R219	1-208-903-81	s	RES, CHIP 4.7K (1005)
R220	1-208-903-81	s	RES, CHIP 4.7K (1005)
R221	1-208-903-81	s	RES, CHIP 4.7K (1005)
R222	1-208-919-81	s	RES, CHIP 22K (1005)
R223	1-208-919-81	s	RES, CHIP 22K (1005)
R224	1-208-919-81	s	RES, CHIP 22K (1005)
R225	1-208-919-81	s	RES, CHIP 22K (1005)
R226	1-208-927-81	s	RES, CHIP 47K (1005)
R227	1-208-927-81	s	RES, CHIP 47K (1005)
R228	1-208-927-81	s	RES, CHIP 47K (1005)

(FP-144 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R229	1-208-927-81	s	RES, CHIP 47K (1005)
R230	1-220-878-81	s	RES, CHIP 22 (1005)
R231	1-220-878-81	s	RES, CHIP 22 (1005)
R232	1-220-878-81	s	RES, CHIP 22 (1005)
R233	1-220-878-81	s	RES, CHIP 22 (1005)
R234	1-220-878-81	s	RES, CHIP 22 (1005)
R235	1-220-878-81	s	RES, CHIP 22 (1005)
R236	1-208-935-81	s	RES, CHIP 100K (1005)
R237	1-208-935-81	s	RES, CHIP 100K (1005)
R238	1-208-935-81	s	RES, CHIP 100K (1005)
R239	1-208-927-81	s	RES, CHIP 47K (1005)
R240	1-208-927-81	s	RES, CHIP 47K (1005)
R241	1-208-927-81	s	RES, CHIP 47K (1005)
R250	1-208-903-81	s	RES, CHIP 4.7K (1005)
R251	1-208-911-81	s	RES, CHIP 10K (1005)
R252	1-208-903-81	s	RES, CHIP 4.7K (1005)
R253	1-208-911-81	s	RES, CHIP 10K (1005)
R254	1-208-899-81	s	RES, CHIP 3.3K (1005)
R255	1-208-899-81	s	RES, CHIP 3.3K (1005)
R256	1-208-911-81	s	RES, CHIP 10K (1005)
R257	1-208-911-81	s	RES, CHIP 10K (1005)
R258	1-208-903-81	s	RES, CHIP 4.7K (1005)
R259	1-208-903-81	s	RES, CHIP 4.7K (1005)
R260	1-208-911-81	s	RES, CHIP 10K (1005)
R261	1-208-911-81	s	RES, CHIP 10K (1005)
R262	1-208-899-81	s	RES, CHIP 3.3K (1005)
R263	1-208-899-81	s	RES, CHIP 3.3K (1005)
R264	1-208-927-81	s	RES, CHIP 47K (1005)
R265	1-208-927-81	s	RES, CHIP 47K (1005)
R266	1-208-903-81	s	RES, CHIP 4.7K (1005)
R267	1-208-903-81	s	RES, CHIP 4.7K (1005)
R268	1-208-903-81	s	RES, CHIP 4.7K (1005)
R269	1-208-903-81	s	RES, CHIP 4.7K (1005)
R270	1-208-903-81	s	RES, CHIP 4.7K (1005)
R271	1-208-903-81	s	RES, CHIP 4.7K (1005)
R272	1-208-919-81	s	RES, CHIP 22K (1005)
R273	1-208-919-81	s	RES, CHIP 22K (1005)
R274	1-208-919-81	s	RES, CHIP 22K (1005)
R275	1-208-919-81	s	RES, CHIP 22K (1005)
R276	1-208-927-81	s	RES, CHIP 47K (1005)
R277	1-208-927-81	s	RES, CHIP 47K (1005)
R278	1-208-927-81	s	RES, CHIP 47K (1005)
R279	1-208-927-81	s	RES, CHIP 47K (1005)
R280	1-220-878-81	s	RES, CHIP 22 (1005)
R281	1-220-878-81	s	RES, CHIP 22 (1005)
R282	1-220-878-81	s	RES, CHIP 22 (1005)
R283	1-220-878-81	s	RES, CHIP 22 (1005)
R284	1-220-878-81	s	RES, CHIP 22 (1005)
R285	1-220-878-81	s	RES, CHIP 22 (1005)
R286	1-208-935-81	s	RES, CHIP 100K (1005)
R287	1-208-935-81	s	RES, CHIP 100K (1005)
R288	1-208-935-81	s	RES, CHIP 100K (1005)
R289	1-208-927-81	s	RES, CHIP 47K (1005)
R290	1-208-911-81	s	RES, CHIP 10K (1005)
R291	1-208-927-81	s	RES, CHIP 47K (1005)
R292	1-208-911-81	s	RES, CHIP 10K (1005)
R300	1-208-855-81	s	RES, CHIP 47 (1005)
R301	1-208-855-81	s	RES, CHIP 47 (1005)
R302	1-208-943-81	s	RES, CHIP 220K (1005)

(FP-144 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R303	1-208-919-81	s	RES, CHIP 22K (1005)
R304	1-208-919-81	s	RES, CHIP 22K (1005)
R305	1-208-935-81	s	RES, CHIP 100K (1005)
R306	1-208-903-81	s	RES, CHIP 4.7K (1005)
R307	1-208-903-81	s	RES, CHIP 4.7K (1005)
R308	1-208-903-81	s	RES, CHIP 4.7K (1005)
R309	1-208-903-81	s	RES, CHIP 4.7K (1005)
R310	1-208-903-81	s	RES, CHIP 4.7K (1005)
R311	1-208-903-81	s	RES, CHIP 4.7K (1005)
R312	1-208-871-81	s	RES, CHIP 220 (1005)
R313	1-208-871-81	s	RES, CHIP 220 (1005)
R314	1-208-871-81	s	RES, CHIP 220 (1005)
R315	1-208-871-81	s	RES, CHIP 220 (1005)
R316	1-208-903-81	s	RES, CHIP 4.7K (1005)
R317	1-208-903-81	s	RES, CHIP 4.7K (1005)
R318	1-208-927-81	s	RES, CHIP 47K (1005)
R319	1-208-903-81	s	RES, CHIP 4.7K (1005)
R320	1-208-903-81	s	RES, CHIP 4.7K (1005)
R321	1-208-911-81	s	RES, CHIP 10K (1005)
R322	1-208-911-81	s	RES, CHIP 10K (1005)
R323	1-208-917-81	s	RES, CHIP 18K (1005)
R324	1-208-917-81	s	RES, CHIP 18K (1005)
R325	1-208-911-81	s	RES, CHIP 10K (1005)
R326	1-208-911-81	s	RES, CHIP 10K (1005)
R327	1-208-899-81	s	RES, CHIP 3.3K (1005)
R328	1-208-899-81	s	RES, CHIP 3.3K (1005)
R329	1-208-927-81	s	RES, CHIP 47K (1005)
R330	1-208-927-81	s	RES, CHIP 47K (1005)
R331	1-208-911-81	s	RES, CHIP 10K (1005)
R332	1-208-911-81	s	RES, CHIP 10K (1005)
R333	1-208-899-81	s	RES, CHIP 3.3K (1005)
R334	1-208-903-81	s	RES, CHIP 4.7K (1005)
R335	1-208-899-81	s	RES, CHIP 3.3K (1005)
R336	1-208-903-81	s	RES, CHIP 4.7K (1005)
R337	1-208-895-81	s	RES, CHIP 2.2K (1005)
R338	1-208-895-81	s	RES, CHIP 2.2K (1005)
R339	1-208-887-81	s	RES, CHIP 1.0K (1005)
R340	1-208-887-81	s	RES, CHIP 1.0K (1005)
R341	1-208-899-81	s	RES, CHIP 3.3K (1005)
R342	1-208-899-81	s	RES, CHIP 3.3K (1005)
R343	1-208-909-81	s	RES, CHIP 8.2K (1005)
R344	1-208-909-81	s	RES, CHIP 8.2K (1005)
R345	1-208-895-81	s	RES, CHIP 2.2K (1005)
R346	1-208-895-81	s	RES, CHIP 2.2K (1005)
R347	1-208-899-81	s	RES, CHIP 3.3K (1005)
R348	1-208-899-81	s	RES, CHIP 3.3K (1005)
R349	1-208-911-81	s	RES, CHIP 10K (1005)
R350	1-208-911-81	s	RES, CHIP 10K (1005)
R351	1-208-911-81	s	RES, CHIP 10K (1005)
R352	1-208-911-81	s	RES, CHIP 10K (1005)
R353	1-208-911-81	s	RES, CHIP 10K (1005)
R354	1-208-911-81	s	RES, CHIP 10K (1005)
R355	1-208-911-81	s	RES, CHIP 10K (1005)
R356	1-208-911-81	s	RES, CHIP 10K (1005)
R357	1-208-911-81	s	RES, CHIP 10K (1005)
R358	1-208-911-81	s	RES, CHIP 10K (1005)
R361	1-208-917-81	s	RES, CHIP 18K (1005)
R362	1-208-917-81	s	RES, CHIP 18K (1005)
R363	1-208-917-81	s	RES, CHIP 18K (1005)

(FP-144 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R364	1-208-917-81	s	RES, CHIP 18K (1005)
R365	1-220-878-81	s	RES, CHIP 22 (1005)
R366	1-208-947-81	s	RES, CHIP 330K (1005)
R367	1-208-919-81	s	RES, CHIP 22K (1005)
R368	1-208-921-81	s	RES, CHIP 27K (1005)
R369	1-208-943-81	s	RES, CHIP 220K (1005)
R370	1-220-878-81	s	RES, CHIP 22 (1005)
R371	1-220-878-81	s	RES, CHIP 22 (1005)
R372	1-208-947-81	s	RES, CHIP 330K (1005)
R373	1-208-919-81	s	RES, CHIP 22K (1005)
R374	1-208-921-81	s	RES, CHIP 27K (1005)
R375	1-208-943-81	s	RES, CHIP 220K (1005)
R376	1-220-878-81	s	RES, CHIP 22 (1005)
R377	1-208-911-81	s	RES, CHIP 10K (1005)
R378	1-208-911-81	s	RES, CHIP 10K (1005)
R379	1-208-935-81	s	RES, CHIP 100K (1005)
R380	1-208-935-81	s	RES, CHIP 100K (1005)
R381	1-208-935-81	s	RES, CHIP 100K (1005)
R382	1-208-935-81	s	RES, CHIP 100K (1005)
R383	1-208-911-81	s	RES, CHIP 10K (1005)
R384	1-208-911-81	s	RES, CHIP 10K (1005)
R400	1-208-903-81	s	RES, CHIP 4.7K (1005)
R401	1-208-903-81	s	RES, CHIP 4.7K (1005)
R402	1-208-903-81	s	RES, CHIP 4.7K (1005)
R403	1-208-903-81	s	RES, CHIP 4.7K (1005)
R404	1-208-895-81	s	RES, CHIP 2.2K (1005)
R405	1-208-895-81	s	RES, CHIP 2.2K (1005)
R406	1-208-919-81	s	RES, CHIP 22K (1005)
R407	1-208-911-81	s	RES, CHIP 10K (1005)
R408	1-208-915-81	s	RES, CHIP 15K (1005)
R409	1-208-927-81	s	RES, CHIP 47K (1005)
R410	1-208-927-81	s	RES, CHIP 47K (1005)
R412	1-208-911-81	s	RES, CHIP 10K (1005)
R413	1-208-911-81	s	RES, CHIP 10K (1005)
R414	1-208-911-81	s	RES, CHIP 10K (1005)
R415	1-208-911-81	s	RES, CHIP 10K (1005)
R416	1-208-927-81	s	RES, CHIP 47K (1005)
R417	1-208-923-81	s	RES, CHIP 33K (1005)
R418	1-208-911-81	s	RES, CHIP 10K (1005)
R420	1-208-903-81	s	RES, CHIP 4.7K (1005)
R421	1-208-903-81	s	RES, CHIP 4.7K (1005)
R422	1-208-903-81	s	RES, CHIP 4.7K (1005)
R423	1-208-919-81	s	RES, CHIP 22K (1005)
R424	1-208-919-81	s	RES, CHIP 22K (1005)
R425	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R426	1-208-919-81	s	RES, CHIP 22K (1005)
R427	1-208-911-81	s	RES, CHIP 10K (1005)
R428	1-208-911-81	s	RES, CHIP 10K (1005)
R429	1-208-887-81	s	RES, CHIP 1.0K (1005)
R430	1-208-911-81	s	RES, CHIP 10K (1005)
R432	1-208-903-81	s	RES, CHIP 4.7K (1005)
R433	1-208-959-81	s	RES, CHIP 1M (1005)
R434	1-208-887-81	s	RES, CHIP 1.0K (1005)
R435	1-208-863-81	s	RES, CHIP 100 (1005)
R437	1-208-903-81	s	RES, CHIP 4.7K (1005)
R438	1-208-903-81	s	RES, CHIP 4.7K (1005)
R439	1-208-911-81	s	RES, CHIP 10K (1005)
R440	1-208-911-81	s	RES, CHIP 10K (1005)
R441	1-208-935-81	s	RES, CHIP 100K (1005)

(FP-144 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R442	1-208-935-81	s	RES, CHIP 100K (1005)
R443	1-208-887-81	s	RES, CHIP 1.0K (1005)
R444	1-208-887-81	s	RES, CHIP 1.0K (1005)
R445	1-208-903-81	s	RES, CHIP 4.7K (1005)
R446	1-208-903-81	s	RES, CHIP 4.7K (1005)
R447	1-220-870-81	s	RES, CHIP 10 (1005)
R448	1-220-870-81	s	RES, CHIP 10 (1005)
R449	1-208-899-81	s	RES, CHIP 3.3K (1005)
R450	1-208-899-81	s	RES, CHIP 3.3K (1005)
R451	1-208-911-81	s	RES, CHIP 10K (1005)
R452	1-208-855-81	s	RES, CHIP 47 (1005)
R453	1-220-870-81	s	RES, CHIP 10 (1005)
R457	1-208-919-81	s	RES, CHIP 22K (1005)
R458	1-208-919-81	s	RES, CHIP 22K (1005)
R459	1-208-935-81	s	RES, CHIP 100K (1005)
R460	1-208-935-81	s	RES, CHIP 100K (1005)
R500	1-208-863-81	s	RES, CHIP 100 (1005)
R501	1-208-935-81	s	RES, CHIP 100K (1005)
R502	1-208-863-81	s	RES, CHIP 100 (1005)
R503	1-208-907-81	s	RES, CHIP 6.8K (1005)
R504	1-208-913-81	s	RES, CHIP 12K (1005)
R505	1-208-927-81	s	RES, CHIP 47K (1005)
R506	1-208-927-81	s	RES, CHIP 47K (1005)
R507	1-208-927-81	s	RES, CHIP 47K (1005)
R508	1-208-919-81	s	RES, CHIP 22K (1005)
R509	1-208-863-81	s	RES, CHIP 100 (1005)
R510	1-208-911-81	s	RES, CHIP 10K (1005)
R511	1-208-875-81	s	RES, CHIP 330 (1005)
R512	1-208-875-81	s	RES, CHIP 330 (1005)
R513	1-208-911-81	s	RES, CHIP 10K (1005)
R514	1-208-935-81	s	RES, CHIP 100K (1005)
R515	1-208-959-81	s	RES, CHIP 1M (1005)
R516	1-208-935-81	s	RES, CHIP 100K (1005)
R517	1-208-923-81	s	RES, CHIP 33K (1005)
R518	1-208-911-81	s	RES, CHIP 10K (1005)
R519	1-208-863-81	s	RES, CHIP 100 (1005)
R520	1-208-919-81	s	RES, CHIP 22K (1005)
R521	1-208-923-81	s	RES, CHIP 33K (1005)
R522	1-208-923-81	s	RES, CHIP 33K (1005)
R523	1-208-935-81	s	RES, CHIP 100K (1005)
R524	1-208-915-81	s	RES, CHIP 15K (1005)
R525	1-208-895-81	s	RES, CHIP 2.2K (1005)
R526	1-208-887-81	s	RES, CHIP 1.0K (1005)
R527	1-208-943-81	s	RES, CHIP 220K (1005)
R528	1-208-863-81	s	RES, CHIP 100 (1005)
R529	1-208-935-81	s	RES, CHIP 100K (1005)
R530	1-208-895-81	s	RES, CHIP 2.2K (1005)
R531	1-208-863-81	s	RES, CHIP 100 (1005)
R532	1-208-887-81	s	RES, CHIP 1.0K (1005)
R533	1-208-899-81	s	RES, CHIP 3.3K (1005)
R534	1-208-875-81	s	RES, CHIP 330 (1005)
R535	1-208-903-81	s	RES, CHIP 4.7K (1005)
R536	1-208-899-81	s	RES, CHIP 3.3K (1005)
R537	1-208-875-81	s	RES, CHIP 330 (1005)
R538	1-208-903-81	s	RES, CHIP 4.7K (1005)
R539	1-208-887-81	s	RES, CHIP 1.0K (1005)
R540	1-208-863-81	s	RES, CHIP 100 (1005)
R541	1-208-863-81	s	RES, CHIP 100 (1005)
R542	1-208-863-81	s	RES, CHIP 100 (1005)

(FP-144 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R543	1-208-863-81	s	RES, CHIP 100 (1005)
R544	1-208-863-81	s	RES, CHIP 100 (1005)
R545	1-208-863-81	s	RES, CHIP 100 (1005)
R546	1-208-863-81	s	RES, CHIP 100 (1005)
R547	1-208-935-81	s	RES, CHIP 100K (1005)
R548	1-208-935-81	s	RES, CHIP 100K (1005)
R549	1-208-935-81	s	RES, CHIP 100K (1005)
R550	1-208-943-81	s	RES, CHIP 220K (1005)
R551	1-208-911-81	s	RES, CHIP 10K (1005)
R552	1-208-923-81	s	RES, CHIP 33K (1005)
R553	1-208-943-81	s	RES, CHIP 220K (1005)
R554	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R555	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R556	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R557	1-208-935-81	s	RES, CHIP 100K (1005)
R558	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R559	1-208-871-81	s	RES, CHIP 220 (1005)
R560	1-208-935-81	s	RES, CHIP 100K (1005)
R561	1-208-875-81	s	RES, CHIP 330 (1005)
R562	1-218-943-81	s	RES, CHIP 150
R563	1-208-887-81	s	RES, CHIP 1.0K (1005)
R564	1-208-943-81	s	RES, CHIP 220K (1005)
R565	1-208-887-81	s	RES, CHIP 1.0K (1005)
R566	1-208-863-81	s	RES, CHIP 100 (1005)
R567	1-208-935-81	s	RES, CHIP 100K (1005)
R568	1-208-871-81	s	RES, CHIP 220 (1005)
R569	1-208-871-81	s	RES, CHIP 220 (1005)
R570	1-220-878-81	s	RES, CHIP 22 (1005)
R571	1-220-878-81	s	RES, CHIP 22 (1005)
R572	1-220-878-81	s	RES, CHIP 22 (1005)
R573	1-220-878-81	s	RES, CHIP 22 (1005)
R574	1-208-863-81	s	RES, CHIP 100 (1005)
R575	1-208-863-81	s	RES, CHIP 100 (1005)
R576	1-208-863-81	s	RES, CHIP 100 (1005)
R577	1-208-935-81	s	RES, CHIP 100K (1005)
R600	1-208-935-81	s	RES, CHIP 100K (1005)
R601	1-208-935-81	s	RES, CHIP 100K (1005)
R602	1-208-863-81	s	RES, CHIP 100 (1005)
R603	1-208-863-81	s	RES, CHIP 100 (1005)
R604	1-208-863-81	s	RES, CHIP 100 (1005)
R605	1-208-887-81	s	RES, CHIP 1.0K (1005)
R606	1-208-871-81	s	RES, CHIP 220 (1005)
R607	1-208-871-81	s	RES, CHIP 220 (1005)
R608	1-208-871-81	s	RES, CHIP 220 (1005)
R609	1-208-887-81	s	RES, CHIP 1.0K (1005)
R610	1-208-887-81	s	RES, CHIP 1.0K (1005)
R611	1-208-887-81	s	RES, CHIP 1.0K (1005)
R612	1-208-919-81	s	RES, CHIP 22K (1005)
R613	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R614	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R615	1-208-919-81	s	RES, CHIP 22K (1005)
R616	1-208-919-81	s	RES, CHIP 22K (1005)
R617	1-208-887-81	s	RES, CHIP 1.0K (1005)
R618	1-208-855-81	s	RES, CHIP 47 (1005)
R619	1-208-855-81	s	RES, CHIP 47 (1005)
R620	1-208-855-81	s	RES, CHIP 47 (1005)
R621	1-208-855-81	s	RES, CHIP 47 (1005)
R622	1-208-887-81	s	RES, CHIP 1.0K (1005)
R623	1-208-935-81	s	RES, CHIP 100K (1005)

(FP-144 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R624	1-208-935-81	s	RES, CHIP 100K (1005)
R625	1-208-935-81	s	RES, CHIP 100K (1005)
R626	1-208-911-81	s	RES, CHIP 10K (1005)
R627	1-208-903-81	s	RES, CHIP 4.7K (1005)
R628	1-208-911-81	s	RES, CHIP 10K (1005)
R629	1-208-903-81	s	RES, CHIP 4.7K (1005)
R630	1-208-935-81	s	RES, CHIP 100K (1005)
R631	1-208-935-81	s	RES, CHIP 100K (1005)
R632	1-208-935-81	s	RES, CHIP 100K (1005)
R633	1-208-935-81	s	RES, CHIP 100K (1005)
R634	1-208-935-81	s	RES, CHIP 100K (1005)
R635	1-208-895-81	s	RES, CHIP 2.2K (1005)
R636	1-208-895-81	s	RES, CHIP 2.2K (1005)
R637	1-208-895-81	s	RES, CHIP 2.2K (1005)
R638	1-208-875-81	s	RES, CHIP 330 (1005)
R639	1-208-875-81	s	RES, CHIP 330 (1005)
R640	1-208-875-81	s	RES, CHIP 330 (1005)
R641	1-208-919-81	s	RES, CHIP 22K (1005)
R642	1-208-863-81	s	RES, CHIP 100 (1005)
R643	1-208-863-81	s	RES, CHIP 100 (1005)
R644	1-208-911-81	s	RES, CHIP 10K (1005)
R645	1-208-863-81	s	RES, CHIP 100 (1005)
R646	1-208-863-81	s	RES, CHIP 100 (1005)
R647	1-208-895-81	s	RES, CHIP 2.2K (1005)
R648	1-208-923-81	s	RES, CHIP 33K (1005)
R649	1-208-895-81	s	RES, CHIP 2.2K (1005)
R650	1-208-911-81	s	RES, CHIP 10K (1005)
R651	1-220-870-81	s	RES, CHIP 10 (1005)
R652	1-220-870-81	s	RES, CHIP 10 (1005)
R653	1-220-870-81	s	RES, CHIP 10 (1005)
R654	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R655	1-208-911-81	s	RES, CHIP 10K (1005)
R657	1-208-903-81	s	RES, CHIP 4.7K (1005)
R658	1-208-903-81	s	RES, CHIP 4.7K (1005)
R659	1-208-903-81	s	RES, CHIP 4.7K (1005)
RB500	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB501	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB502	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB503	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB504	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB600	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB601	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB602	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB603	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RV400	1-225-566-11	s	RES, VAR, CARBON 50K
RV401	1-223-684-11	s	RES, VAR, CARBON 5K
RV600	1-227-248-11	s	RES, VAR, CARBON 5K
RV601	1-227-248-11	s	RES, VAR, CARBON 5K
S300	1-571-275-41	s	SWITCH, SLIDE
S500	1-692-270-41	s	SWITCH, SLIDE
S501	1-771-721-21	s	SWITCH, TACTILE
S601	1-771-141-21	s	SWITCH, SLIDE
S602	1-771-140-21	s	SWITCH, SLIDE
S603	1-572-725-11	s	SWITCH, TACTILE
S604	1-572-725-11	s	SWITCH, TACTILE
S605	1-771-141-21	s	SWITCH, SLIDE
S606	1-771-141-21	s	SWITCH, SLIDE
S607	1-771-140-21	s	SWITCH, SLIDE

(FP-144 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
S608	1-771-140-21	s	SWITCH, SLIDE
S609	1-771-140-21	s	SWITCH, SLIDE
S610	1-771-140-21	s	SWITCH, SLIDE
S611	1-771-141-21	s	SWITCH, SLIDE
S612	1-771-141-21	s	SWITCH, SLIDE
S613	1-771-141-21	s	SWITCH, SLIDE
S614	1-771-141-21	s	SWITCH, SLIDE
S615	1-786-721-22	s	TACTILE SWITCH
X500	1-813-061-11	s	VIBRATOR, CRYSTAL (16 MHz)

FP-144A BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1169-400-A	s	MOUNTED CIRCUIT BOARD, FP-144A
BT500	1-756-076-21	s	HOLDER, LITHIUM BATTERY
C2	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C6	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C7	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C8	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C9	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C10	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C11	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C12	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C13	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C14	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C15	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C16	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C17	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C18	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C19	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C20	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C21	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C22	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C23	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C24	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C25	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C26	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C27	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C28	1-126-390-21	s	CAP, CHIP ELECT 22MF (4X5.7)
C29	1-126-390-21	s	CAP, CHIP ELECT 22MF (4X5.7)
C30	1-126-390-21	s	CAP, CHIP ELECT 22MF (4X5.7)
C31	1-126-390-21	s	CAP, CHIP ELECT 22MF (4X5.7)
C50	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C51	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C52	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C53	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C54	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C55	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C56	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C57	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C58	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C59	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C60	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C61	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C62	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C200	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C201	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C202	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C203	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C204	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C205	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C206	1-126-390-21	s	CAP, CHIP ELECT 22MF (4X5.7)
C207	1-126-390-21	s	CAP, CHIP ELECT 22MF (4X5.7)
C208	1-126-390-21	s	CAP, CHIP ELECT 22MF (4X5.7)
C209	1-126-390-21	s	CAP, CHIP ELECT 22MF (4X5.7)
C210	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C211	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(FP-144A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C212	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C213	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C214	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C215	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C216	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C217	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C218	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C219	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C220	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C221	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C222	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C223	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C224	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C225	1-165-887-91	s	CAP, CERAMIC 0.22MF (1005)
C226	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C227	1-165-887-91	s	CAP, CERAMIC 0.22MF (1005)
C228	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C229	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C250	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C251	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C252	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C253	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C254	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C255	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C256	1-126-390-21	s	CAP, CHIP ELECT 22MF (4X5.7)
C257	1-126-390-21	s	CAP, CHIP ELECT 22MF (4X5.7)
C258	1-126-390-21	s	CAP, CHIP ELECT 22MF (4X5.7)
C259	1-126-390-21	s	CAP, CHIP ELECT 22MF (4X5.7)
C260	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C261	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C262	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C263	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C264	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C265	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C266	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C267	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C268	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C269	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C270	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C271	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C272	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C273	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C274	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C275	1-165-887-91	s	CAP, CERAMIC 0.22MF (1005)
C276	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C277	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C278	1-165-887-91	s	CAP, CERAMIC 0.22MF (1005)
C279	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C280	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C281	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C282	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C283	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C300	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C301	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C302	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C303	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C304	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C305	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C306	1-115-419-91	s	CAP,CHIP CERAMIC3300PF CH 2012

(FP-144A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C307	1-115-419-91	s	CAP,CHIP CERAMIC3300PF CH 2012
C308	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C309	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C310	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C311	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C312	1-164-882-81	s	CAP,CHIP CERAMIC 220PF CH 1005
C313	1-164-882-81	s	CAP,CHIP CERAMIC 220PF CH 1005
C314	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C315	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C316	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C317	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C318	1-128-360-21	s	CAP, CHIP CELECT 220MF
C320	1-128-360-21	s	CAP, CHIP CELECT 220MF
C322	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C323	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C325	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C326	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C327	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C329	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C330	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C331	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C332	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C333	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C400	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C401	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C402	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C403	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C404	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C405	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C406	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C407	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C408	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C409	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C410	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C411	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C412	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C413	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C414	1-127-760-91	s	CAP, CHIP CERAMIC 4.7MF B 2012
C415	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C416	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C417	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C418	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C419	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C421	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C422	1-131-661-21	s	CAP, CHIP ELECT 100MF(6.3X5.7)
C423	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C424	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C425	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C426	1-100-743-91	s	CAP, CERAMIC 2.2MF C (2012)
C427	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C428	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C429	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C430	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C431	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C432	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C433	1-131-661-21	s	CAP, CHIP ELECT 100MF(6.3X5.7)
C434	1-131-661-21	s	CAP, CHIP ELECT 100MF(6.3X5.7)
C435	1-131-661-21	s	CAP, CHIP ELECT 100MF(6.3X5.7)
C436	1-131-661-21	s	CAP, CHIP ELECT 100MF(6.3X5.7)

(FP-144A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C437	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C438	1-131-661-21	s	CAP, CHIP ELECT 100MF(6.3X5.7)
C500	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C501	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C502	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C503	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C504	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C505	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C506	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C507	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C508	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C509	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C510	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C511	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C512	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C513	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C514	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C515	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C516	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C517	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C518	1-104-609-21	s	CAP, CHIP ELECT 100MF (4X5.7)
C519	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C520	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C521	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C522	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C523	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C524	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C525	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C526	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C527	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C528	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C529	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C530	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C531	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C532	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C533	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C534	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C535	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C536	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C537	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C538	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C539	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C600	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C601	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C602	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C603	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C604	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C605	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C606	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C607	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C608	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C609	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C610	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C611	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C612	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C613	1-100-743-91	s	CAP, CERAMIC 2.2MF C (2012)
C614	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C615	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C616	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)

(FP-144A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C617	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
CN105	1-750-161-51	s	CONNECTOR, FPC 30P
CN106	1-750-161-51	s	CONNECTOR, FPC 30P
CN107	1-750-161-51	s	CONNECTOR, FPC 30P
CN400	1-569-775-21	o	PIN, CONNECTOR (SMD) 5P
CN401	1-580-055-21	o	PIN, CONNECTOR (SMD) 2P
CN500	1-573-290-21	s	PIN, CONNECTOR (1.5MM) (SMD)4P
CN501	1-573-290-21	s	PIN, CONNECTOR (1.5MM) (SMD)4P
CN502	1-580-056-21	s	PIN, CONNECTOR (SMD) 3P
CN600	1-817-194-21	s	PIN, CONNECTOR (SMD) 13P
CN601	1-580-756-21	s	PIN, CONNECTOR (SMD) 7P
CN602	1-794-997-21	s	PIN, CONNECTOR 20P
CN603	1-815-597-31	s	CONNECTOR, FFC/FPC (ZIF) AN 6P
D200	8-719-991-01	s	DIODE DAP222-TL
D201	8-719-991-01	s	DIODE DAP222-TL
D250	8-719-991-01	s	DIODE DAP222-TL
D251	8-719-991-01	s	DIODE DAP222-TL
D500	8-719-938-77	s	DIODE SB05-05C-TB-E
D501	8-719-938-77	s	DIODE SB05-05C-TB-E
D502	8-719-938-77	s	DIODE SB05-05C-TB-E
D503	8-719-938-77	s	DIODE SB05-05C-TB-E
D504	8-719-991-01	s	DIODE DAP222-TL
D505	8-719-077-09	s	DIODE CL-196HR-CD-T
D506	6-501-052-02	s	DIODE CL-197HB1-D-T
D507	8-719-077-09	s	DIODE CL-196HR-CD-T
D508	8-719-074-31	s	DIODE CL-196YG-CD-T
D509	8-719-074-31	s	DIODE CL-196YG-CD-T
D510	8-719-938-77	s	DIODE SB05-05C-TB-E
D600	8-719-938-77	s	DIODE SB05-05C-TB-E
E300	1-535-757-21	s	CHIP, CHECKER
E301	1-535-757-21	s	CHIP, CHECKER
E600	1-535-757-21	s	CHIP, CHECKER
E601	1-535-757-21	s	CHIP, CHECKER
IC1	8-759-523-01	s	IC TC74HC4052AFT(EL)
IC2	8-759-523-01	s	IC TC74HC4052AFT(EL)
IC3	8-759-523-01	s	IC TC74HC4052AFT(EL)
IC4	8-759-523-01	s	IC TC74HC4052AFT(EL)
IC5	8-759-422-21	s	IC NJM4580V(TE2)
IC6	8-759-422-21	s	IC NJM4580V(TE2)
IC7	8-759-422-21	s	IC NJM4580V(TE2)
IC50	8-759-422-21	s	IC NJM4580V(TE2)
IC51	8-759-422-21	s	IC NJM4580V(TE2)
IC54	8-759-564-49	s	IC TC7W53FU(TE12R)
IC55	8-759-564-49	s	IC TC7W53FU(TE12R)
IC56	8-759-564-49	s	IC TC7W53FU(TE12R)
IC57	8-759-564-49	s	IC TC7W53FU(TE12R)
IC58	6-707-893-01	s	IC TC74VHCT541AFT(EKJ)
IC200	8-759-422-21	s	IC NJM4580V(TE2)
IC201	8-759-422-21	s	IC NJM4580V(TE2)
IC202	8-759-697-17	s	IC AK5383VF-E2
IC250	8-759-422-21	s	IC NJM4580V(TE2)
IC251	8-759-422-21	s	IC NJM4580V(TE2)
IC252	8-759-697-17	s	IC AK5383VF-E2
IC300	8-759-447-77	s	IC TC7WH74FU(TE12R)
IC301	8-759-546-74	s	IC TC7WH157FU(TE12R)
IC302	6-701-111-01	s	IC AK4382AVT-E2
IC303	8-759-422-21	s	IC NJM4580V(TE2)

(FP-144A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC304	8-759-422-21	s	IC NJM4580V(TE2)
IC305	8-759-194-97	s	IC NJM4560M-D(TE2)
IC400	8-759-183-53	s	IC TL431CPK-E2
IC401	8-759-327-01	s	IC NJM062V(TE2)
IC402	6-704-960-01	s	IC NJM2172V(TE2)
IC403	8-759-327-01	s	IC NJM062V(TE2)
IC405	8-759-194-97	s	IC NJM4560M-D(TE2)
IC406	8-759-523-01	s	IC TC74HC4052AFT(EL)
IC407	6-706-476-01	s	IC TC7SET04FU(T5RSOJF)
IC500	8-759-564-49	s	IC TC7W53FU(TE12R)
IC501	8-759-564-49	s	IC TC7W53FU(TE12R)
IC502	8-759-337-40	s	IC NJM2904V(TE2)
IC503	6-708-478-01	s	IC RX-8025NB
IC504	8-759-337-40	s	IC NJM2904V(TE2)
IC506	8-759-678-06	s	IC CAT24WC02WI-TE13
IC507	6-704-566-01	s	IC R3112N291A-TR-FA
IC508	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC509	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC510	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC511	6-704-238-01	s	IC S-812C30AUA-C2KT2G
IC600	6-702-481-01	s	IC PCA9555DB-118
IC601	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC602	8-759-523-02	s	IC TC74HC4053AFT(EL)
IC603	8-759-327-01	s	IC NJM062V(TE2)
IC604	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
L400	1-469-549-21	s	INDUCTOR, CHIP 1.0UH (LB2016)
L401	1-469-549-21	s	INDUCTOR, CHIP 1.0UH (LB2016)
L500	1-469-549-21	s	INDUCTOR, CHIP 1.0UH (LB2016)
L600	1-469-549-21	s	INDUCTOR, CHIP 1.0UH (LB2016)
L601	1-469-549-21	s	INDUCTOR, CHIP 1.0UH (LB2016)
L602	1-469-549-21	s	INDUCTOR, CHIP 1.0UH (LB2016)
L603	1-469-549-21	s	INDUCTOR, CHIP 1.0UH (LB2016)
Q200	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q201	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q202	8-729-013-24	s	TRANSISTOR HN1C01FU-TE85R
Q203	8-729-013-24	s	TRANSISTOR HN1C01FU-TE85R
Q204	6-551-041-01	s	TRANSISTOR RN4904(T5RSONY,D,F)
Q205	6-550-832-01	s	TRANSISTOR SI2301BDS-T1
Q206	6-551-266-01	s	TRANSISTOR SI2304BDS-T1
Q207	6-551-041-01	s	TRANSISTOR RN4904(T5RSONY,D,F)
Q208	6-551-041-01	s	TRANSISTOR RN4904(T5RSONY,D,F)
Q209	6-551-041-01	s	TRANSISTOR RN4904(T5RSONY,D,F)
Q250	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q251	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q252	8-729-013-24	s	TRANSISTOR HN1C01FU-TE85R
Q253	8-729-013-24	s	TRANSISTOR HN1C01FU-TE85R
Q254	6-551-041-01	s	TRANSISTOR RN4904(T5RSONY,D,F)
Q255	6-550-832-01	s	TRANSISTOR SI2301BDS-T1
Q256	6-551-266-01	s	TRANSISTOR SI2304BDS-T1
Q300	6-551-041-01	s	TRANSISTOR RN4904(T5RSONY,D,F)
Q301	8-729-013-24	s	TRANSISTOR HN1C01FU-TE85R
Q302	8-729-013-24	s	TRANSISTOR HN1C01FU-TE85R
Q303	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q304	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q305	8-729-013-37	s	TRANSISTOR 2SC4213-AB-TE85L
Q306	8-729-013-37	s	TRANSISTOR 2SC4213-AB-TE85L
Q309	8-729-013-37	s	TRANSISTOR 2SC4213-AB-TE85L
Q310	8-729-013-37	s	TRANSISTOR 2SC4213-AB-TE85L

(FP-144A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
Q400	8-729-209-77	s	TRANSISTOR 2SC2873Y-TE12L
Q401	8-729-209-73	s	TRANSISTOR 2SA1213Y-TE12L
Q402	8-729-209-77	s	TRANSISTOR 2SC2873Y-TE12L
Q408	8-729-013-37	s	TRANSISTOR 2SC4213-AB-TE85L
Q409	8-729-013-37	s	TRANSISTOR 2SC4213-AB-TE85L
Q410	8-729-013-37	s	TRANSISTOR 2SC4213-AB-TE85L
Q411	8-729-013-37	s	TRANSISTOR 2SC4213-AB-TE85L
Q412	8-729-013-22	s	TRANSISTOR HN1A01FU-TE85R
Q414	6-551-041-01	s	TRANSISTOR RN4904(T5RSONY,D,F)
Q500	6-551-266-01	s	TRANSISTOR SI2304BDS-T1
Q501	6-550-980-01	s	TRANSISTOR RN1904(T5RSONY,D,F)
Q502	8-729-013-28	s	TRANSISTOR HN1B01FU-TE85R
Q503	6-550-832-01	s	TRANSISTOR SI2301BDS-T1
Q504	6-550-980-01	s	TRANSISTOR RN1904(T5RSONY,D,F)
Q505	6-550-980-01	s	TRANSISTOR RN1904(T5RSONY,D,F)
Q507	6-550-980-01	s	TRANSISTOR RN1904(T5RSONY,D,F)
Q508	6-551-266-01	s	TRANSISTOR SI2304BDS-T1
Q509	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q600	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q601	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q602	6-551-041-01	s	TRANSISTOR RN4904(T5RSONY,D,F)
R1	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2	1-208-927-81	s	RES, CHIP 47K (1005)
R3	1-208-899-81	s	RES, CHIP 3.3K (1005)
R4	1-208-899-81	s	RES, CHIP 3.3K (1005)
R7	1-208-903-81	s	RES, CHIP 4.7K (1005)
R8	1-208-935-81	s	RES, CHIP 100K (1005)
R9	1-208-935-81	s	RES, CHIP 100K (1005)
R10	1-208-903-81	s	RES, CHIP 4.7K (1005)
R13	1-208-935-81	s	RES, CHIP 100K (1005)
R14	1-208-935-81	s	RES, CHIP 100K (1005)
R15	1-208-895-81	s	RES, CHIP 2.2K (1005)
R16	1-208-895-81	s	RES, CHIP 2.2K (1005)
R17	1-208-895-81	s	RES, CHIP 2.2K (1005)
R18	1-208-895-81	s	RES, CHIP 2.2K (1005)
R19	1-208-895-81	s	RES, CHIP 2.2K (1005)
R20	1-208-895-81	s	RES, CHIP 2.2K (1005)
R21	1-208-895-81	s	RES, CHIP 2.2K (1005)
R22	1-208-895-81	s	RES, CHIP 2.2K (1005)
R23	1-208-895-81	s	RES, CHIP 2.2K (1005)
R24	1-208-895-81	s	RES, CHIP 2.2K (1005)
R25	1-208-895-81	s	RES, CHIP 2.2K (1005)
R26	1-208-895-81	s	RES, CHIP 2.2K (1005)
R27	1-208-895-81	s	RES, CHIP 2.2K (1005)
R28	1-208-895-81	s	RES, CHIP 2.2K (1005)
R29	1-208-895-81	s	RES, CHIP 2.2K (1005)
R30	1-208-895-81	s	RES, CHIP 2.2K (1005)
R50	1-208-935-81	s	RES, CHIP 100K (1005)
R51	1-208-935-81	s	RES, CHIP 100K (1005)
R52	1-208-935-81	s	RES, CHIP 100K (1005)
R53	1-208-935-81	s	RES, CHIP 100K (1005)
R54	1-208-919-81	s	RES, CHIP 22K (1005)
R55	1-208-919-81	s	RES, CHIP 22K (1005)
R56	1-208-919-81	s	RES, CHIP 22K (1005)
R57	1-208-919-81	s	RES, CHIP 22K (1005)
R58	1-208-903-81	s	RES, CHIP 4.7K (1005)
R59	1-208-903-81	s	RES, CHIP 4.7K (1005)
R60	1-208-903-81	s	RES, CHIP 4.7K (1005)

(FP-144A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R61	1-208-903-81	s	RES, CHIP 4.7K (1005)
R62	1-208-919-81	s	RES, CHIP 22K (1005)
R63	1-208-919-81	s	RES, CHIP 22K (1005)
R64	1-208-919-81	s	RES, CHIP 22K (1005)
R65	1-208-919-81	s	RES, CHIP 22K (1005)
R66	1-208-919-81	s	RES, CHIP 22K (1005)
R67	1-208-919-81	s	RES, CHIP 22K (1005)
R68	1-208-919-81	s	RES, CHIP 22K (1005)
R69	1-208-919-81	s	RES, CHIP 22K (1005)
R70	1-208-935-81	s	RES, CHIP 100K (1005)
R71	1-208-923-81	s	RES, CHIP 33K (1005)
R72	1-208-923-81	s	RES, CHIP 33K (1005)
R73	1-208-923-81	s	RES, CHIP 33K (1005)
R74	1-208-923-81	s	RES, CHIP 33K (1005)
R75	1-208-923-81	s	RES, CHIP 33K (1005)
R76	1-208-923-81	s	RES, CHIP 33K (1005)
R77	1-208-923-81	s	RES, CHIP 33K (1005)
R78	1-208-923-81	s	RES, CHIP 33K (1005)
R79	1-208-919-81	s	RES, CHIP 22K (1005)
R80	1-208-919-81	s	RES, CHIP 22K (1005)
R81	1-208-919-81	s	RES, CHIP 22K (1005)
R82	1-208-919-81	s	RES, CHIP 22K (1005)
R83	1-208-935-81	s	RES, CHIP 100K (1005)
R200	1-208-903-81	s	RES, CHIP 4.7K (1005)
R201	1-208-911-81	s	RES, CHIP 10K (1005)
R202	1-208-903-81	s	RES, CHIP 4.7K (1005)
R203	1-208-911-81	s	RES, CHIP 10K (1005)
R204	1-208-899-81	s	RES, CHIP 3.3K (1005)
R205	1-208-899-81	s	RES, CHIP 3.3K (1005)
R206	1-208-911-81	s	RES, CHIP 10K (1005)
R207	1-208-911-81	s	RES, CHIP 10K (1005)
R208	1-208-903-81	s	RES, CHIP 4.7K (1005)
R209	1-208-903-81	s	RES, CHIP 4.7K (1005)
R210	1-208-911-81	s	RES, CHIP 10K (1005)
R211	1-208-911-81	s	RES, CHIP 10K (1005)
R212	1-208-899-81	s	RES, CHIP 3.3K (1005)
R213	1-208-899-81	s	RES, CHIP 3.3K (1005)
R214	1-208-927-81	s	RES, CHIP 47K (1005)
R215	1-208-927-81	s	RES, CHIP 47K (1005)
R216	1-208-903-81	s	RES, CHIP 4.7K (1005)
R217	1-208-903-81	s	RES, CHIP 4.7K (1005)
R218	1-208-903-81	s	RES, CHIP 4.7K (1005)
R219	1-208-903-81	s	RES, CHIP 4.7K (1005)
R220	1-208-903-81	s	RES, CHIP 4.7K (1005)
R221	1-208-903-81	s	RES, CHIP 4.7K (1005)
R222	1-208-919-81	s	RES, CHIP 22K (1005)
R223	1-208-919-81	s	RES, CHIP 22K (1005)
R224	1-208-919-81	s	RES, CHIP 22K (1005)
R225	1-208-919-81	s	RES, CHIP 22K (1005)
R226	1-208-927-81	s	RES, CHIP 47K (1005)
R227	1-208-927-81	s	RES, CHIP 47K (1005)
R228	1-208-927-81	s	RES, CHIP 47K (1005)
R229	1-208-927-81	s	RES, CHIP 47K (1005)
R230	1-220-878-81	s	RES, CHIP 22 (1005)
R231	1-220-878-81	s	RES, CHIP 22 (1005)
R232	1-220-878-81	s	RES, CHIP 22 (1005)
R233	1-220-878-81	s	RES, CHIP 22 (1005)
R234	1-220-878-81	s	RES, CHIP 22 (1005)
R235	1-220-878-81	s	RES, CHIP 22 (1005)

(FP-144A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R236	1-208-935-81	s	RES, CHIP 100K (1005)
R237	1-208-935-81	s	RES, CHIP 100K (1005)
R238	1-208-935-81	s	RES, CHIP 100K (1005)
R239	1-208-927-81	s	RES, CHIP 47K (1005)
R240	1-208-927-81	s	RES, CHIP 47K (1005)
R241	1-208-927-81	s	RES, CHIP 47K (1005)
R250	1-208-903-81	s	RES, CHIP 4.7K (1005)
R251	1-208-911-81	s	RES, CHIP 10K (1005)
R252	1-208-903-81	s	RES, CHIP 4.7K (1005)
R253	1-208-911-81	s	RES, CHIP 10K (1005)
R254	1-208-899-81	s	RES, CHIP 3.3K (1005)
R255	1-208-899-81	s	RES, CHIP 3.3K (1005)
R256	1-208-911-81	s	RES, CHIP 10K (1005)
R257	1-208-911-81	s	RES, CHIP 10K (1005)
R258	1-208-903-81	s	RES, CHIP 4.7K (1005)
R259	1-208-903-81	s	RES, CHIP 4.7K (1005)
R260	1-208-911-81	s	RES, CHIP 10K (1005)
R261	1-208-911-81	s	RES, CHIP 10K (1005)
R262	1-208-899-81	s	RES, CHIP 3.3K (1005)
R263	1-208-899-81	s	RES, CHIP 3.3K (1005)
R264	1-208-927-81	s	RES, CHIP 47K (1005)
R265	1-208-927-81	s	RES, CHIP 47K (1005)
R266	1-208-903-81	s	RES, CHIP 4.7K (1005)
R267	1-208-903-81	s	RES, CHIP 4.7K (1005)
R268	1-208-903-81	s	RES, CHIP 4.7K (1005)
R269	1-208-903-81	s	RES, CHIP 4.7K (1005)
R270	1-208-903-81	s	RES, CHIP 4.7K (1005)
R271	1-208-903-81	s	RES, CHIP 4.7K (1005)
R272	1-208-919-81	s	RES, CHIP 22K (1005)
R273	1-208-919-81	s	RES, CHIP 22K (1005)
R274	1-208-919-81	s	RES, CHIP 22K (1005)
R275	1-208-919-81	s	RES, CHIP 22K (1005)
R276	1-208-927-81	s	RES, CHIP 47K (1005)
R277	1-208-927-81	s	RES, CHIP 47K (1005)
R278	1-208-927-81	s	RES, CHIP 47K (1005)
R279	1-208-927-81	s	RES, CHIP 47K (1005)
R280	1-220-878-81	s	RES, CHIP 22 (1005)
R281	1-220-878-81	s	RES, CHIP 22 (1005)
R282	1-220-878-81	s	RES, CHIP 22 (1005)
R283	1-220-878-81	s	RES, CHIP 22 (1005)
R284	1-220-878-81	s	RES, CHIP 22 (1005)
R285	1-220-878-81	s	RES, CHIP 22 (1005)
R286	1-208-935-81	s	RES, CHIP 100K (1005)
R287	1-208-935-81	s	RES, CHIP 100K (1005)
R288	1-208-935-81	s	RES, CHIP 100K (1005)
R289	1-208-927-81	s	RES, CHIP 47K (1005)
R290	1-208-911-81	s	RES, CHIP 10K (1005)
R291	1-208-927-81	s	RES, CHIP 47K (1005)
R292	1-208-911-81	s	RES, CHIP 10K (1005)
R300	1-208-855-81	s	RES, CHIP 47 (1005)
R301	1-208-855-81	s	RES, CHIP 47 (1005)
R302	1-208-943-81	s	RES, CHIP 220K (1005)
R303	1-208-919-81	s	RES, CHIP 22K (1005)
R304	1-208-919-81	s	RES, CHIP 22K (1005)
R305	1-208-935-81	s	RES, CHIP 100K (1005)
R306	1-208-903-81	s	RES, CHIP 4.7K (1005)
R307	1-208-903-81	s	RES, CHIP 4.7K (1005)
R308	1-208-903-81	s	RES, CHIP 4.7K (1005)
R309	1-208-903-81	s	RES, CHIP 4.7K (1005)

(FP-144A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R310	1-208-903-81	s	RES, CHIP 4.7K (1005)
R311	1-208-903-81	s	RES, CHIP 4.7K (1005)
R312	1-208-871-81	s	RES, CHIP 220 (1005)
R313	1-208-871-81	s	RES, CHIP 220 (1005)
R314	1-208-871-81	s	RES, CHIP 220 (1005)
R315	1-208-871-81	s	RES, CHIP 220 (1005)
R316	1-208-903-81	s	RES, CHIP 4.7K (1005)
R317	1-208-903-81	s	RES, CHIP 4.7K (1005)
R318	1-208-927-81	s	RES, CHIP 47K (1005)
R319	1-208-903-81	s	RES, CHIP 4.7K (1005)
R320	1-208-903-81	s	RES, CHIP 4.7K (1005)
R321	1-208-911-81	s	RES, CHIP 10K (1005)
R322	1-208-911-81	s	RES, CHIP 10K (1005)
R323	1-208-917-81	s	RES, CHIP 18K (1005)
R324	1-208-917-81	s	RES, CHIP 18K (1005)
R325	1-208-911-81	s	RES, CHIP 10K (1005)
R326	1-208-911-81	s	RES, CHIP 10K (1005)
R327	1-208-899-81	s	RES, CHIP 3.3K (1005)
R328	1-208-899-81	s	RES, CHIP 3.3K (1005)
R329	1-208-927-81	s	RES, CHIP 47K (1005)
R330	1-208-927-81	s	RES, CHIP 47K (1005)
R331	1-208-911-81	s	RES, CHIP 10K (1005)
R332	1-208-911-81	s	RES, CHIP 10K (1005)
R333	1-208-899-81	s	RES, CHIP 3.3K (1005)
R334	1-208-903-81	s	RES, CHIP 4.7K (1005)
R335	1-208-899-81	s	RES, CHIP 3.3K (1005)
R336	1-208-903-81	s	RES, CHIP 4.7K (1005)
R337	1-208-895-81	s	RES, CHIP 2.2K (1005)
R338	1-208-895-81	s	RES, CHIP 2.2K (1005)
R339	1-208-887-81	s	RES, CHIP 1.0K (1005)
R340	1-208-887-81	s	RES, CHIP 1.0K (1005)
R341	1-208-899-81	s	RES, CHIP 3.3K (1005)
R342	1-208-899-81	s	RES, CHIP 3.3K (1005)
R343	1-208-911-81	s	RES, CHIP 10K (1005)
R344	1-208-911-81	s	RES, CHIP 10K (1005)
R345	1-208-895-81	s	RES, CHIP 2.2K (1005)
R346	1-208-895-81	s	RES, CHIP 2.2K (1005)
R347	1-208-911-81	s	RES, CHIP 10K (1005)
R348	1-208-911-81	s	RES, CHIP 10K (1005)
R349	1-208-903-81	s	RES, CHIP 4.7K (1005)
R350	1-208-903-81	s	RES, CHIP 4.7K (1005)
R359	1-220-878-81	s	RES, CHIP 22 (1005)
R360	1-220-878-81	s	RES, CHIP 22 (1005)
R381	1-208-935-81	s	RES, CHIP 100K (1005)
R382	1-208-935-81	s	RES, CHIP 100K (1005)
R383	1-208-911-81	s	RES, CHIP 10K (1005)
R384	1-208-911-81	s	RES, CHIP 10K (1005)
R400	1-208-903-81	s	RES, CHIP 4.7K (1005)
R401	1-208-903-81	s	RES, CHIP 4.7K (1005)
R402	1-208-903-81	s	RES, CHIP 4.7K (1005)
R403	1-208-903-81	s	RES, CHIP 4.7K (1005)
R404	1-208-895-81	s	RES, CHIP 2.2K (1005)
R405	1-208-895-81	s	RES, CHIP 2.2K (1005)
R406	1-208-919-81	s	RES, CHIP 22K (1005)
R407	1-208-911-81	s	RES, CHIP 10K (1005)
R408	1-208-915-81	s	RES, CHIP 15K (1005)
R409	1-208-927-81	s	RES, CHIP 47K (1005)
R410	1-208-927-81	s	RES, CHIP 47K (1005)
R412	1-208-911-81	s	RES, CHIP 10K (1005)

(FP-144A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R413	1-208-911-81	s	RES, CHIP 10K (1005)
R414	1-208-911-81	s	RES, CHIP 10K (1005)
R415	1-208-911-81	s	RES, CHIP 10K (1005)
R416	1-208-927-81	s	RES, CHIP 47K (1005)
R417	1-208-923-81	s	RES, CHIP 33K (1005)
R418	1-208-911-81	s	RES, CHIP 10K (1005)
R420	1-208-903-81	s	RES, CHIP 4.7K (1005)
R421	1-208-903-81	s	RES, CHIP 4.7K (1005)
R422	1-208-903-81	s	RES, CHIP 4.7K (1005)
R423	1-208-919-81	s	RES, CHIP 22K (1005)
R424	1-208-919-81	s	RES, CHIP 22K (1005)
R425	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R426	1-208-919-81	s	RES, CHIP 22K (1005)
R427	1-208-911-81	s	RES, CHIP 10K (1005)
R428	1-208-911-81	s	RES, CHIP 10K (1005)
R429	1-208-887-81	s	RES, CHIP 1.0K (1005)
R430	1-208-911-81	s	RES, CHIP 10K (1005)
R432	1-208-903-81	s	RES, CHIP 4.7K (1005)
R433	1-208-959-81	s	RES, CHIP 1M (1005)
R434	1-208-887-81	s	RES, CHIP 1.0K (1005)
R435	1-208-863-81	s	RES, CHIP 100 (1005)
R437	1-208-903-81	s	RES, CHIP 4.7K (1005)
R438	1-208-903-81	s	RES, CHIP 4.7K (1005)
R439	1-208-911-81	s	RES, CHIP 10K (1005)
R440	1-208-911-81	s	RES, CHIP 10K (1005)
R441	1-208-935-81	s	RES, CHIP 100K (1005)
R442	1-208-935-81	s	RES, CHIP 100K (1005)
R443	1-208-887-81	s	RES, CHIP 1.0K (1005)
R444	1-208-887-81	s	RES, CHIP 1.0K (1005)
R445	1-208-903-81	s	RES, CHIP 4.7K (1005)
R446	1-208-903-81	s	RES, CHIP 4.7K (1005)
R447	1-220-870-81	s	RES, CHIP 10 (1005)
R448	1-220-870-81	s	RES, CHIP 10 (1005)
R449	1-208-899-81	s	RES, CHIP 3.3K (1005)
R450	1-208-899-81	s	RES, CHIP 3.3K (1005)
R451	1-208-911-81	s	RES, CHIP 10K (1005)
R452	1-208-855-81	s	RES, CHIP 47 (1005)
R453	1-220-870-81	s	RES, CHIP 10 (1005)
R457	1-208-919-81	s	RES, CHIP 22K (1005)
R458	1-208-919-81	s	RES, CHIP 22K (1005)
R459	1-208-935-81	s	RES, CHIP 100K (1005)
R460	1-208-935-81	s	RES, CHIP 100K (1005)
R500	1-208-863-81	s	RES, CHIP 100 (1005)
R501	1-208-935-81	s	RES, CHIP 100K (1005)
R502	1-208-863-81	s	RES, CHIP 100 (1005)
R503	1-208-907-81	s	RES, CHIP 6.8K (1005)
R504	1-208-913-81	s	RES, CHIP 12K (1005)
R505	1-208-927-81	s	RES, CHIP 47K (1005)
R506	1-208-927-81	s	RES, CHIP 47K (1005)
R507	1-208-927-81	s	RES, CHIP 47K (1005)
R508	1-208-919-81	s	RES, CHIP 22K (1005)
R509	1-208-863-81	s	RES, CHIP 100 (1005)
R510	1-208-911-81	s	RES, CHIP 10K (1005)
R511	1-208-875-81	s	RES, CHIP 330 (1005)
R512	1-208-875-81	s	RES, CHIP 330 (1005)
R513	1-208-911-81	s	RES, CHIP 10K (1005)
R514	1-208-935-81	s	RES, CHIP 100K (1005)
R515	1-208-959-81	s	RES, CHIP 1M (1005)
R516	1-208-935-81	s	RES, CHIP 100K (1005)

(FP-144A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R517	1-208-923-81	s	RES, CHIP 33K (1005)
R518	1-208-911-81	s	RES, CHIP 10K (1005)
R519	1-208-863-81	s	RES, CHIP 100 (1005)
R520	1-208-919-81	s	RES, CHIP 22K (1005)
R521	1-208-923-81	s	RES, CHIP 33K (1005)
R522	1-208-923-81	s	RES, CHIP 33K (1005)
R523	1-208-935-81	s	RES, CHIP 100K (1005)
R524	1-208-915-81	s	RES, CHIP 15K (1005)
R525	1-208-895-81	s	RES, CHIP 2.2K (1005)
R526	1-208-887-81	s	RES, CHIP 1.0K (1005)
R527	1-208-943-81	s	RES, CHIP 220K (1005)
R528	1-208-863-81	s	RES, CHIP 100 (1005)
R529	1-208-935-81	s	RES, CHIP 100K (1005)
R530	1-208-895-81	s	RES, CHIP 2.2K (1005)
R531	1-208-863-81	s	RES, CHIP 100 (1005)
R532	1-208-887-81	s	RES, CHIP 1.0K (1005)
R533	1-208-899-81	s	RES, CHIP 3.3K (1005)
R534	1-208-875-81	s	RES, CHIP 330 (1005)
R535	1-208-903-81	s	RES, CHIP 4.7K (1005)
R536	1-208-899-81	s	RES, CHIP 3.3K (1005)
R537	1-208-875-81	s	RES, CHIP 330 (1005)
R538	1-208-903-81	s	RES, CHIP 4.7K (1005)
R539	1-208-887-81	s	RES, CHIP 1.0K (1005)
R540	1-208-863-81	s	RES, CHIP 100 (1005)
R541	1-208-863-81	s	RES, CHIP 100 (1005)
R542	1-208-863-81	s	RES, CHIP 100 (1005)
R543	1-208-863-81	s	RES, CHIP 100 (1005)
R544	1-208-863-81	s	RES, CHIP 100 (1005)
R545	1-208-863-81	s	RES, CHIP 100 (1005)
R546	1-208-863-81	s	RES, CHIP 100 (1005)
R547	1-208-935-81	s	RES, CHIP 100K (1005)
R548	1-208-935-81	s	RES, CHIP 100K (1005)
R549	1-208-935-81	s	RES, CHIP 100K (1005)
R550	1-208-943-81	s	RES, CHIP 220K (1005)
R551	1-208-911-81	s	RES, CHIP 10K (1005)
R552	1-208-923-81	s	RES, CHIP 33K (1005)
R553	1-208-943-81	s	RES, CHIP 220K (1005)
R554	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R555	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R556	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R557	1-208-935-81	s	RES, CHIP 100K (1005)
R558	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R559	1-208-871-81	s	RES, CHIP 220 (1005)
R560	1-208-935-81	s	RES, CHIP 100K (1005)
R561	1-208-875-81	s	RES, CHIP 330 (1005)
R562	1-218-943-81	s	RES, CHIP 150
R563	1-208-887-81	s	RES, CHIP 1.0K (1005)
R564	1-208-943-81	s	RES, CHIP 220K (1005)
R565	1-208-887-81	s	RES, CHIP 1.0K (1005)
R566	1-208-863-81	s	RES, CHIP 100 (1005)
R567	1-208-935-81	s	RES, CHIP 100K (1005)
R568	1-208-871-81	s	RES, CHIP 220 (1005)
R569	1-208-871-81	s	RES, CHIP 220 (1005)
R570	1-220-878-81	s	RES, CHIP 22 (1005)
R571	1-220-878-81	s	RES, CHIP 22 (1005)
R572	1-220-878-81	s	RES, CHIP 22 (1005)
R573	1-220-878-81	s	RES, CHIP 22 (1005)
R574	1-208-863-81	s	RES, CHIP 100 (1005)
R575	1-208-863-81	s	RES, CHIP 100 (1005)

(FP-144A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R576	1-208-863-81	s	RES, CHIP 100 (1005)
R577	1-208-935-81	s	RES, CHIP 100K (1005)
R600	1-208-935-81	s	RES, CHIP 100K (1005)
R601	1-208-935-81	s	RES, CHIP 100K (1005)
R602	1-208-863-81	s	RES, CHIP 100 (1005)
R603	1-208-863-81	s	RES, CHIP 100 (1005)
R604	1-208-863-81	s	RES, CHIP 100 (1005)
R605	1-208-887-81	s	RES, CHIP 1.0K (1005)
R606	1-208-871-81	s	RES, CHIP 220 (1005)
R607	1-208-871-81	s	RES, CHIP 220 (1005)
R608	1-208-871-81	s	RES, CHIP 220 (1005)
R609	1-208-887-81	s	RES, CHIP 1.0K (1005)
R610	1-208-887-81	s	RES, CHIP 1.0K (1005)
R611	1-208-887-81	s	RES, CHIP 1.0K (1005)
R612	1-208-919-81	s	RES, CHIP 22K (1005)
R613	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R614	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R615	1-208-919-81	s	RES, CHIP 22K (1005)
R616	1-208-919-81	s	RES, CHIP 22K (1005)
R617	1-208-887-81	s	RES, CHIP 1.0K (1005)
R618	1-208-855-81	s	RES, CHIP 47 (1005)
R619	1-208-855-81	s	RES, CHIP 47 (1005)
R620	1-208-855-81	s	RES, CHIP 47 (1005)
R621	1-208-855-81	s	RES, CHIP 47 (1005)
R622	1-208-887-81	s	RES, CHIP 1.0K (1005)
R623	1-208-935-81	s	RES, CHIP 100K (1005)
R624	1-208-935-81	s	RES, CHIP 100K (1005)
R625	1-208-935-81	s	RES, CHIP 100K (1005)
R626	1-208-911-81	s	RES, CHIP 10K (1005)
R627	1-208-903-81	s	RES, CHIP 4.7K (1005)
R628	1-208-911-81	s	RES, CHIP 10K (1005)
R629	1-208-903-81	s	RES, CHIP 4.7K (1005)
R630	1-208-935-81	s	RES, CHIP 100K (1005)
R631	1-208-935-81	s	RES, CHIP 100K (1005)
R632	1-208-935-81	s	RES, CHIP 100K (1005)
R633	1-208-935-81	s	RES, CHIP 100K (1005)
R634	1-208-935-81	s	RES, CHIP 100K (1005)
R635	1-208-895-81	s	RES, CHIP 2.2K (1005)
R636	1-208-895-81	s	RES, CHIP 2.2K (1005)
R637	1-208-895-81	s	RES, CHIP 2.2K (1005)
R638	1-208-875-81	s	RES, CHIP 330 (1005)
R639	1-208-875-81	s	RES, CHIP 330 (1005)
R640	1-208-875-81	s	RES, CHIP 330 (1005)
R641	1-208-919-81	s	RES, CHIP 22K (1005)
R642	1-208-863-81	s	RES, CHIP 100 (1005)
R643	1-208-863-81	s	RES, CHIP 100 (1005)
R644	1-208-911-81	s	RES, CHIP 10K (1005)
R645	1-208-863-81	s	RES, CHIP 100 (1005)
R646	1-208-863-81	s	RES, CHIP 100 (1005)
R647	1-208-895-81	s	RES, CHIP 2.2K (1005)
R648	1-208-923-81	s	RES, CHIP 33K (1005)
R649	1-208-895-81	s	RES, CHIP 2.2K (1005)
R650	1-208-911-81	s	RES, CHIP 10K (1005)
R651	1-220-870-81	s	RES, CHIP 10 (1005)
R652	1-220-870-81	s	RES, CHIP 10 (1005)
R653	1-220-870-81	s	RES, CHIP 10 (1005)
R654	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R655	1-208-911-81	s	RES, CHIP 10K (1005)
R657	1-208-903-81	s	RES, CHIP 4.7K (1005)

(FP-144A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R658	1-208-903-81	s	RES, CHIP 4.7K (1005)
R659	1-208-903-81	s	RES, CHIP 4.7K (1005)
RB500	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB501	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB502	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB503	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB504	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB600	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB601	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB602	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB603	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RV400	1-225-566-11	s	RES, VAR, CARBON 50K
RV401	1-223-684-11	s	RES, VAR, CARBON 5K
RV600	1-227-248-11	s	RES, VAR, CARBON 5K
RV601	1-227-248-11	s	RES, VAR, CARBON 5K
S300	1-571-275-41	s	SWITCH, SLIDE
S500	1-692-270-41	s	SWITCH, SLIDE
S501	1-771-721-21	s	SWITCH, TACTILE
S601	1-771-141-21	s	SWITCH, SLIDE
S602	1-771-140-21	s	SWITCH, SLIDE
S603	1-572-725-11	s	SWITCH, TACTILE
S604	1-572-725-11	s	SWITCH, TACTILE
S605	1-771-141-21	s	SWITCH, SLIDE
S606	1-771-141-21	s	SWITCH, SLIDE
S607	1-771-140-21	s	SWITCH, SLIDE
S608	1-771-140-21	s	SWITCH, SLIDE
S609	1-771-140-21	s	SWITCH, SLIDE
S610	1-771-140-21	s	SWITCH, SLIDE
S611	1-771-141-21	s	SWITCH, SLIDE
S612	1-771-141-21	s	SWITCH, SLIDE
S613	1-771-141-21	s	SWITCH, SLIDE
S614	1-771-141-21	s	SWITCH, SLIDE
S615	1-786-721-22	s	TACTILE SWITCH
X500	1-813-061-11	s	VIBRATOR, CRYSTAL (16 MHz)

GCN-17 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1164-297-A	s	MOUNTED CIRCUIT BOARD, GCN-17
1pc	1-573-183-11	o	HOUSING, CONNECTOR 13P
CN2	1-580-057-21	s	PIN, CONNECTOR (SMD) 4P
S1	1-762-122-11	s	SWITCH, TOGGLE
S2	1-762-123-11	s	SWITCH, TOGGLE
S3	1-762-123-11	s	SWITCH, TOGGLE
S4	1-762-123-11	s	SWITCH, TOGGLE
S5	1-762-531-11	s	SWITCH, TOGGLE

HN-300G BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1138-492-A	s	MOUNTED CIRCUIT BOARD, HN-300G
C1	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C2	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C4	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C8	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C15	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C16	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C17	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C18	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C19	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C20	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C24	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C26	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C27	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C28	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C29	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C31	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C32	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C33	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C34	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C35	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C36	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
CN1	1-750-161-51	s	CONNECTOR, FPC 30P
CN3	1-816-126-61	s	CONNECTOR, FFC/FPC
CN4	1-573-366-71	s	CONNECTOR, FFC/FPC (ZIF) 26P
CN6	1-774-873-61	s	CONNECTOR, FPC 6P
CN7	1-580-057-21	s	PIN, CONNECTOR (SMD) 4P
CN8	1-580-056-21	s	PIN, CONNECTOR (SMD) 3P
CN9	1-774-873-61	s	CONNECTOR, FPC 6P
CN10	1-764-082-21	s	PIN, CONNECTOR (PC BOARD) 11P
CN11	1-580-055-21	o	PIN, CONNECTOR (SMD) 2P
D1	8-719-024-71	s	DIODE 1SS362-TE85L
D2	8-719-024-71	s	DIODE 1SS362-TE85L
D3	8-719-024-71	s	DIODE 1SS362-TE85L
D4	8-719-024-71	s	DIODE 1SS362-TE85L
D5	8-719-024-71	s	DIODE 1SS362-TE85L
D6	8-719-024-71	s	DIODE 1SS362-TE85L
D7	8-719-024-71	s	DIODE 1SS362-TE85L
D8	8-719-024-71	s	DIODE 1SS362-TE85L
D10	8-719-024-71	s	DIODE 1SS362-TE85L
D11	8-719-024-71	s	DIODE 1SS362-TE85L
IC1	8-759-523-84	s	IC TC74VHC14FT(EL)
IC4	8-759-687-37	s	IC OPA2340EA/2K5-S
IC5	8-759-687-37	s	IC OPA2340EA/2K5-S
IC7	8-759-338-95	s	IC NJM2903V(TE2)
L1	1-419-630-21	s	COIL, CHOKE 4.7UH
PH1	8-749-924-72	o	PHOTO INTERRUPTER RPI-221
PH2	8-749-924-72	o	PHOTO INTERRUPTER RPI-221
Q4	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q14	8-729-928-55	s	TRANSISTOR DTA123JE-TL
R5	1-208-935-81	s	RES, CHIP 100K (1005)
R7	1-208-877-81	s	RES, CHIP 390 (1005)
R11	1-208-919-81	s	RES, CHIP 22K (1005)
R12	1-208-935-81	s	RES, CHIP 100K (1005)
R14	1-208-877-81	s	RES, CHIP 390 (1005)

(HN-300G BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R17	1-208-911-81	s	RES, CHIP 10K (1005)
R18	1-208-947-81	s	RES, CHIP 330K (1005)
R19	1-208-911-81	s	RES, CHIP 10K (1005)
R21	1-208-887-81	s	RES, CHIP 1.0K (1005)
R23	1-208-903-81	s	RES, CHIP 4.7K (1005)
R24	1-208-927-81	s	RES, CHIP 47K (1005)
R25	1-208-903-81	s	RES, CHIP 4.7K (1005)
R26	1-208-903-81	s	RES, CHIP 4.7K (1005)
R27	1-208-903-81	s	RES, CHIP 4.7K (1005)
R28	1-208-887-81	s	RES, CHIP 1.0K (1005)
R29	1-208-887-81	s	RES, CHIP 1.0K (1005)
R30	1-208-927-81	s	RES, CHIP 47K (1005)
R31	1-208-927-81	s	RES, CHIP 47K (1005)
R32	1-208-899-81	s	RES, CHIP 3.3K (1005)
R33	1-208-923-81	s	RES, CHIP 33K (1005)
R35	1-208-887-81	s	RES, CHIP 1.0K (1005)
R36	1-208-863-81	s	RES, CHIP 100 (1005)
R37	1-208-863-81	s	RES, CHIP 100 (1005)
R38	1-208-863-81	s	RES, CHIP 100 (1005)
R39	1-208-863-81	s	RES, CHIP 100 (1005)
R40	1-208-863-81	s	RES, CHIP 100 (1005)
R41	1-208-863-81	s	RES, CHIP 100 (1005)
R42	1-208-863-81	s	RES, CHIP 100 (1005)
R43	1-208-863-81	s	RES, CHIP 100 (1005)
R44	1-208-863-81	s	RES, CHIP 100 (1005)
R45	1-208-863-81	s	RES, CHIP 100 (1005)
R49	1-208-903-81	s	RES, CHIP 4.7K (1005)

HP-124 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1164-285-A	s	MOUNTED CIRCUIT BOARD, HP-124
C1	1-162-964-91	s	CAP,CHIP CERAMIC 1000PF B 1608
C2	1-162-964-91	s	CAP,CHIP CERAMIC 1000PF B 1608
CN103	1-569-775-21	o	PIN, CONNECTOR (SMD) 5P
CN206	1-794-945-12	s	JACK, SMALL TYPE (WITH SWITCH)
FL1	1-239-895-22	s	FILTER, EMI (SMD)
FL2	1-239-895-22	s	FILTER, EMI (SMD)
L1	1-469-549-21	s	INDUCTOR, CHIP 1.0UH (LB2016)
R1	1-216-864-91	s	CONDUCTOR, CHIP (1608)

IO-228 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1164-248-A	s	MOUNTED CIRCUIT BOARD, IO-228
CN2	1-573-290-21	s	PIN, CONNECTOR (1.5MM) (SMD)4P
CN3	1-764-177-21	s	PIN, CONNECTOR (SMD)(1.5MM) 7P

IR-36 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
CN3	1-817-194-21	s	PIN, CONNECTOR (SMD) 13P
FB1	1-414-445-21	s	FERRITE, EMI (SMD) (1608)
FB2	1-414-445-21	s	FERRITE, EMI (SMD) (1608)
FB3	1-414-445-21	s	FERRITE, EMI (SMD) (1608)
FB4	1-414-445-21	s	FERRITE, EMI (SMD) (1608)
FB5	1-414-772-21	s	FERRITE. EMI (SMD) (2012)
FB6	1-414-445-21	s	FERRITE, EMI (SMD) (1608)
FB7	1-414-445-21	s	FERRITE, EMI (SMD) (1608)
FB8	1-414-445-21	s	FERRITE, EMI (SMD) (1608)
FB9	1-414-445-21	s	FERRITE, EMI (SMD) (1608)
FB10	1-414-445-21	s	FERRITE, EMI (SMD) (1608)
FB11	1-414-445-21	s	FERRITE, EMI (SMD) (1608)
FB12	1-414-445-21	s	FERRITE, EMI (SMD) (1608)
FB13	1-414-445-21	s	FERRITE, EMI (SMD) (1608)
R1	1-216-845-91	s	RES, CHIP 100K (1608)
R2	1-216-845-91	s	RES, CHIP 100K (1608)
R3	1-216-845-91	s	RES, CHIP 100K (1608)

JK-73 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1164-296-A	s	MOUNTED CIRCUIT BOARD, JK-73
1pc	1-569-978-11	o	PIN, CONNECTOR (PC BOARD) 7P
CN1	1-778-788-12	o	JACK, 2P PIN
FB1	1-414-555-21	s	FERRITE, EMI (SMD) (1608)
FB2	1-414-555-21	s	FERRITE, EMI (SMD) (1608)

KSW-51 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1164-279-A	s	MOUNTED CIRCUIT BOARD, KSW-51
CN1	1-580-756-21	s	PIN, CONNECTOR (SMD) 7P
S1	1-571-787-41	s	SWITCH, TACTILE
S2	1-571-787-41	s	SWITCH, TACTILE
S3	1-571-787-41	s	SWITCH, TACTILE

KY-573 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1171-840-A	s	MOUNTED CIRCUIT BOARD, KY-573
C1	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
CN1	1-580-057-21	s	PIN, CONNECTOR (SMD) 4P
D1	8-719-077-09	s	DIODE CL-196HR-CD-T
D2	8-719-077-09	s	DIODE CL-196HR-CD-T
D3	8-719-077-09	s	DIODE CL-196HR-CD-T
D4	8-719-077-09	s	DIODE CL-196HR-CD-T
IC1	6-702-481-01	s	IC PCA9555DB-118
Q1	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q2	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q3	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q4	8-729-928-82	s	TRANSISTOR DTC144EE-TL
R1	1-208-875-81	s	RES, CHIP 330 (1005)
R2	1-208-875-81	s	RES, CHIP 330 (1005)
R3	1-208-875-81	s	RES, CHIP 330 (1005)
R4	1-208-875-81	s	RES, CHIP 330 (1005)
R5	1-208-863-81	s	RES, CHIP 100 (1005)
R6	1-208-863-81	s	RES, CHIP 100 (1005)
RB1	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB2	1-234-375-21	s	RES, NETWORK 1K (1005X4)
S1	1-572-725-11	s	SWITCH, TACTILE
S2	1-572-725-11	s	SWITCH, TACTILE
S3	1-572-725-11	s	SWITCH, TACTILE
S4	1-572-725-11	s	SWITCH, TACTILE
S5	1-572-725-11	s	SWITCH, TACTILE
S6	1-572-725-11	s	SWITCH, TACTILE
S7	1-572-725-11	s	SWITCH, TACTILE

LE-297 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1144-558-A	s	MOUNTED CIRCUIT BOARD, LE-297

LE-298 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1144-559-A	s	MOUNTED CIRCUIT BOARD, LE-298

LED-428 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1164-299-A	s	MOUNTED CIRCUIT BOARD, LED-428
C1	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
CN1	1-580-055-21	o	PIN, CONNECTOR (SMD) 2P
D1	8-719-053-96	s	DIODE CL-200HR-C-TUL
R1	1-208-863-81	s	RES, CHIP 100 (1005)
R2	1-208-863-81	s	RES, CHIP 100 (1005)
S1	1-570-608-11	s	SWITCH, TOGGLE

LGT-12 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1164-304-A	s	MOUNTED CIRCUIT BOARD, LGT-12
1pc	1-569-619-11	o	HOUSING, CONNECTOR 4P
1pc	1-569-682-11	o	HOUSING, CONNECTOR 4P
S1	1-570-878-31	s	SWITCH, PUSH (1 KEY)
S2	1-570-984-11	s	SWITCH, TOGGLE

MA-136 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1164-286-A	s	MOUNTED CIRCUIT BOARD, MA-136
1pc	1-569-621-11	o	HOUSING, CONNECTOR 12P
C1	1-164-315-91	s	CAP, CERAMIC 470PF CH (1608)
C2	1-164-315-91	s	CAP, CERAMIC 470PF CH (1608)
C3	1-164-315-91	s	CAP, CERAMIC 470PF CH (1608)
C4	1-164-315-91	s	CAP, CERAMIC 470PF CH (1608)
C5	1-164-315-91	s	CAP, CERAMIC 470PF CH (1608)
C6	1-164-315-91	s	CAP, CERAMIC 470PF CH (1608)
C7	1-164-315-91	s	CAP, CERAMIC 470PF CH (1608)
C8	1-164-315-91	s	CAP, CERAMIC 470PF CH (1608)
C9	1-126-405-21	s	CAP, CHIP ELECT 10MF (6.3X5.7)
C10	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C11	1-117-145-21	s	CAP, ELECT 1MF
C12	1-117-145-21	s	CAP, ELECT 1MF
C13	1-117-145-21	s	CAP, ELECT 1MF
C14	1-117-145-21	s	CAP, ELECT 1MF
C15	1-107-826-91	s	CAP, CHIP CERAMIC 100000PF B
C16	1-107-826-91	s	CAP, CHIP CERAMIC 100000PF B
C17	1-107-826-91	s	CAP, CHIP CERAMIC 100000PF B
C18	1-107-826-91	s	CAP, CHIP CERAMIC 100000PF B
C19	1-162-927-91	s	CAP, CERAMIC 100PF CH 1608
C20	1-162-927-91	s	CAP, CERAMIC 100PF CH 1608
C21	1-162-927-91	s	CAP, CERAMIC 100PF CH 1608
C22	1-162-927-91	s	CAP, CERAMIC 100PF CH 1608
C23	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C24	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C25	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C26	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C27	1-107-826-91	s	CAP, CHIP CERAMIC 100000PF B
C28	1-107-826-91	s	CAP, CHIP CERAMIC 100000PF B
C29	1-126-405-21	s	CAP, CHIP ELECT 10MF (6.3X5.7)
C30	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
CN1	1-784-602-11	s	CONNECTOR, XLR (RECEPTACLE) 5P
D1	8-719-820-42	s	DIODE 1SS302-TE85L
D2	8-719-820-42	s	DIODE 1SS302-TE85L
D3	8-719-820-42	s	DIODE 1SS302-TE85L
D4	8-719-820-42	s	DIODE 1SS302-TE85L
FB1	1-469-112-21	s	FERRITE, EMI (SMD) (1608)
FB2	1-469-112-21	s	FERRITE, EMI (SMD) (1608)
FB3	1-469-112-21	s	FERRITE, EMI (SMD) (1608)
FB4	1-469-112-21	s	FERRITE, EMI (SMD) (1608)
FB5	1-469-112-21	s	FERRITE, EMI (SMD) (1608)
IC1	8-759-422-21	s	IC NJM4580V(TE2)
IC2	8-759-422-21	s	IC NJM4580V(TE2)
Q1	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q2	8-729-202-14	s	TRANSISTOR 2SC2713G-TE85L
Q3	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q4	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q5	8-729-202-14	s	TRANSISTOR 2SC2713G-TE85L
Q6	8-729-928-82	s	TRANSISTOR DTC144EE-TL
R2	1-218-823-91	s	RES, CHIP 100 (1608)
R3	1-218-823-91	s	RES, CHIP 100 (1608)
R4	1-218-823-91	s	RES, CHIP 100 (1608)
R6	1-218-823-91	s	RES, CHIP 100 (1608)
R7	1-218-883-91	s	RES, CHIP 33K (1608)
R8	1-218-871-91	s	RES, CHIP 10K (1608)

(MA-136 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R9	1-218-871-91	s	RES, CHIP 10K (1608)
R10	1-218-871-91	s	RES, CHIP 10K (1608)
R11	1-218-871-91	s	RES, CHIP 10K (1608)
R12	1-218-879-91	s	RES, CHIP 22K (1608)
R13	1-218-879-91	s	RES, CHIP 22K (1608)
R14	1-218-879-91	s	RES, CHIP 22K (1608)
R15	1-218-879-91	s	RES, CHIP 22K (1608)
R16	1-218-871-91	s	RES, CHIP 10K (1608)
R17	1-218-871-91	s	RES, CHIP 10K (1608)
R18	1-218-871-91	s	RES, CHIP 10K (1608)
R19	1-218-871-91	s	RES, CHIP 10K (1608)
R20	1-218-823-91	s	RES, CHIP 100 (1608)
R21	1-218-823-91	s	RES, CHIP 100 (1608)
R22	1-218-823-91	s	RES, CHIP 100 (1608)
R23	1-218-823-91	s	RES, CHIP 100 (1608)
R24	1-218-883-91	s	RES, CHIP 33K (1608)
R26	1-218-847-91	s	RES, CHIP 1.0K (1608)
R27	1-218-847-91	s	RES, CHIP 1.0K (1608)
R28	1-218-847-91	s	RES, CHIP 1.0K (1608)
R29	1-218-847-91	s	RES, CHIP 1.0K (1608)
R30	1-218-863-91	s	RES, CHIP 4.7K (1608)
R31	1-218-863-91	s	RES, CHIP 4.7K (1608)
R32	1-218-863-91	s	RES, CHIP 4.7K (1608)
R33	1-218-863-91	s	RES, CHIP 4.7K (1608)
R34	1-216-825-91	s	RES, CHIP 2.2K (1608)
R35	1-216-825-91	s	RES, CHIP 2.2K (1608)

MB-1028 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1164-280-A	s	MOUNTED CIRCUIT BOARD, MB-1028
2pcs	2-534-514-02	o	SUPPORT (1)
2/3pcs	3-606-303-01	s	FINGER, SHIELD
6pcs	3-855-938-01	s	SCREW
2pcs	7-621-775-08	s	SCREW +B 2.6X3
C100	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C102	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C103	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C104	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C105	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C106	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C107	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C108	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C109	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C110	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C111	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C112	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C113	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C114	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C115	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C116	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C117	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C119	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C120	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C121	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C122	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C123	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C124	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C125	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C126	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C127	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C128	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C129	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C130	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C131	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C132	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C133	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C134	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C135	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C136	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C138	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C139	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C140	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C141	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C142	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C144	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C145	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C146	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C147	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C148	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C150	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C152	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C153	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C154	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C155	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C156	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C157	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C158	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C159	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(MB-1028 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
CN100	1-778-650-31	s	CONNECTOR, FFC/FPC(ZIF) ST 30P
CN101	1-784-625-31	s	CONNECTOR, FFC/FPC(ZIF) AN 30P
CN102	1-695-320-21	o	PIN, CONNECTOR (1.5MM)(SMD) 2P
CN105	1-766-431-51	s	HOUSING, CONNECTOR 30P
CN106	1-766-431-51	s	HOUSING, CONNECTOR 30P
CN107	1-766-431-51	s	HOUSING, CONNECTOR 30P
CN108	1-766-382-21	s	PIN, CONNECTOR (1.5MM)(SMD)10P
CN110	1-817-097-21	o	PIN, CONNECTOR (1.5MM)(SMD)13P
CN111	1-573-806-21	s	PIN, CONNECTOR (1.5MM) (SMD)6P
CN112	1-695-320-21	o	PIN, CONNECTOR (1.5MM)(SMD) 2P
CN113	1-691-550-21	s	PIN, CONNECTOR (1.5MM)(SMD) 3P
CN115	1-573-768-21	o	PIN, CONNECTOR (1.5MM) (SMD)5P
CN116	1-820-029-11	s	PIN, CONNECTOR (1.5MM) (SMD)8P
CN117	1-820-178-11	s	PIN, CONNECTOR (1.5MM) 12P
CN118	1-573-290-21	s	PIN, CONNECTOR (1.5MM) (SMD)4P
CN119	1-820-029-11	s	PIN, CONNECTOR (1.5MM) (SMD)8P
CN120	1-573-290-21	s	PIN, CONNECTOR (1.5MM) (SMD)4P
CN121	1-573-290-21	s	PIN, CONNECTOR (1.5MM) (SMD)4P
CN122	1-573-290-21	s	PIN, CONNECTOR (1.5MM) (SMD)4P
CN124	1-794-519-21	s	PIN, CONNECTOR (PC BOARD) 14P
CN125	1-815-954-21	s	PIN, CONNECTOR (PC BOARD) 13P
CN126	1-816-587-21	s	PIN, CONNECTOR (PC BOARD) 15P
CN127	1-820-177-11	s	PIN, CONNECTOR (1.5MM) 11P
CN128	1-764-177-21	s	PIN, CONNECTOR (SMD)(1.5MM) 7P
E101	1-535-757-21	s	CHIP, CHECKER
E102	1-535-757-21	s	CHIP, CHECKER
E103	1-535-757-21	s	CHIP, CHECKER
E104	1-535-757-21	s	CHIP, CHECKER
TP100	1-535-757-21	s	CHIP, CHECKER
TP101	1-535-757-21	s	CHIP, CHECKER

MS-71 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1164-247-A	s	MOUNTED CIRCUIT BOARD, MS-71
C1	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
CN1	1-766-382-21	s	PIN, CONNECTOR (1.5MM)(SMD)10P
CN2	1-816-950-11	s	CONNECTOR, MEMORY STICK
D1	8-719-053-96	s	DIODE CL-200HR-C-TUL
R2	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4	1-208-879-81	s	RES, CHIP 470 (1005)

PA-328 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
C1	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C6	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C7	1-100-620-91	s	CAP, CHIP CERAMIC 47MF B(3225)
C8	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C10	1-100-620-91	s	CAP, CHIP CERAMIC 47MF B(3225)
C11	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C12	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C13	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C15	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C19	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C24	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C29	1-100-670-91	s	CAP, CERAMIC 4.7MF C (2012)
C32	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C33	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C34	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C35	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C37	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C39	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C40	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C42	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C43	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C44	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C45	1-164-854-81	s	CAP, CHIP CERAMIC 15PF CH 1005
C47	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C48	1-164-843-81	s	CAP, CHIP CERAMIC 3PF CJ 1005
C49	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C50	1-107-826-91	s	CAP, CHIP CERAMIC 100000PF B
C51	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C52	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C53	1-100-670-91	s	CAP, CERAMIC 4.7MF C (2012)
C54	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C55	1-100-670-91	s	CAP, CERAMIC 4.7MF C (2012)
C57	1-100-670-91	s	CAP, CERAMIC 4.7MF C (2012)
C59	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C60	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C61	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C63	1-165-908-91	s	CAP, CERAMIC 1000000PF B 1608
C64	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C65	1-165-908-91	s	CAP, CERAMIC 1000000PF B 1608
C66	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C67	1-165-908-91	s	CAP, CERAMIC 1000000PF B 1608
C68	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C69	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C70	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C71	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C72	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C73	1-165-908-91	s	CAP, CERAMIC 1000000PF B 1608
C74	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C75	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C76	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C77	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C78	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C79	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C80	1-165-908-91	s	CAP, CERAMIC 1000000PF B 1608
C81	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C82	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C83	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(PA-328 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C84	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C85	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C86	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C87	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C88	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C89	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C91	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C93	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C94	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C95	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C96	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C97	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C98	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C99	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C100	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
CN1	1-794-142-31	s	CONNECTOR, FFC/FPC(ZIF) AN 36P
CN2	1-764-078-21	s	PIN, CONNECTOR (PC BOARD) 3P
D1	8-719-024-81	s	DIODE 1SS300-TE85L
E2	1-535-877-22	s	CHIP, CHECKER
FB1	1-400-334-21	s	FERRITE, EMI (SMD) (1608)
FB2	1-400-334-21	s	FERRITE, EMI (SMD) (1608)
FB3	1-400-334-21	s	FERRITE, EMI (SMD) (1608)
FB4	1-400-334-21	s	FERRITE, EMI (SMD) (1608)
FB5	1-400-334-21	s	FERRITE, EMI (SMD) (1608)
FB6	1-400-334-21	s	FERRITE, EMI (SMD) (1608)
IC1	8-759-689-09	s	IC SN65LVDT2DBVR
IC2	6-700-440-01	s	IC SN74ALVC32PWR
IC4	8-759-564-61	s	IC NC7SZ00P5X
IC6	8-759-564-61	s	IC NC7SZ00P5X
IC7	8-759-660-98	s	IC NC7SZ02P5
IC8	8-759-557-85	s	IC NC7SZ32P5X
IC9	6-709-147-01	s	IC SN74LVC2T45DCUR
IC10	6-709-147-01	s	IC SN74LVC2T45DCUR
IC11	6-709-147-01	s	IC SN74LVC2T45DCUR
IC13	6-706-863-01	s	IC LMH6732MFX/NOPB
IC15	8-759-346-27	s	IC LM45BIM3X
IC16	8-759-327-01	s	IC NJM062V(TE2)
IC18	8-759-557-85	s	IC NC7SZ32P5X
IC19	8-759-660-98	s	IC NC7SZ02P5
L1	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L2	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
LV1	1-456-815-11	s	COIL, VARIABLE
R1	1-208-855-81	s	RES, CHIP 47 (1005)
R2	1-208-855-81	s	RES, CHIP 47 (1005)
R3	1-220-878-81	s	RES, CHIP 22 (1005)
R4	1-208-863-81	s	RES, CHIP 100 (1005)
R6	1-220-878-81	s	RES, CHIP 22 (1005)
R9	1-208-863-81	s	RES, CHIP 100 (1005)
R10	1-208-871-81	s	RES, CHIP 220 (1005)
R13	1-208-855-81	s	RES, CHIP 47 (1005)
R14	1-208-871-81	s	RES, CHIP 220 (1005)
R16	1-208-863-81	s	RES, CHIP 100 (1005)
R17	1-208-871-81	s	RES, CHIP 220 (1005)
R21	1-220-870-81	s	RES, CHIP 10 (1005)
R22	1-220-870-81	s	RES, CHIP 10 (1005)

(PA-328 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R24	1-220-870-81	s	RES, CHIP 10 (1005)
R25	1-208-871-81	s	RES, CHIP 220 (1005)
R26	1-220-870-81	s	RES, CHIP 10 (1005)
R34	1-220-878-81	s	RES, CHIP 22 (1005)
R35	1-220-878-81	s	RES, CHIP 22 (1005)
R36	1-208-879-81	s	RES, CHIP 470 (1005)
R39	1-208-947-81	s	RES, CHIP 330K (1005)
R41	1-220-870-81	s	RES, CHIP 10 (1005)
R42	1-208-875-81	s	RES, CHIP 330 (1005)
R43	1-208-863-81	s	RES, CHIP 100 (1005)
R44	1-208-919-81	s	RES, CHIP 22K (1005)
R45	1-208-899-81	s	RES, CHIP 3.3K (1005)
R46	1-208-919-81	s	RES, CHIP 22K (1005)
R49	1-208-911-81	s	RES, CHIP 10K (1005)
R50	1-208-871-81	s	RES, CHIP 220 (1005)
R51	1-208-939-81	s	RES, CHIP 150K (1005)
R52	1-208-863-81	s	RES, CHIP 100 (1005)
R53	1-208-879-81	s	RES, CHIP 470 (1005)
R54	1-208-875-81	s	RES, CHIP 330 (1005)
R55	1-208-879-81	s	RES, CHIP 470 (1005)
R56	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R57	1-208-911-81	s	RES, CHIP 10K (1005)
R58	1-208-887-81	s	RES, CHIP 1.0K (1005)
R59	1-208-911-81	s	RES, CHIP 10K (1005)
R60	1-208-911-81	s	RES, CHIP 10K (1005)
R61	1-208-911-81	s	RES, CHIP 10K (1005)
R62	1-220-870-81	s	RES, CHIP 10 (1005)
R63	1-208-887-81	s	RES, CHIP 1.0K (1005)
R69	1-208-923-81	s	RES, CHIP 33K (1005)
R70	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R71	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R72	1-208-911-81	s	RES, CHIP 10K (1005)
R77	1-208-887-81	s	RES, CHIP 1.0K (1005)
R79	1-208-935-81	s	RES, CHIP 100K (1005)
R83	1-218-990-81	s	CONDUCTOR, CHIP (1005)

PA-329 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
C1	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C6	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C7	1-100-620-91	s	CAP, CHIP CERAMIC 47MF B(3225)
C8	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C10	1-100-620-91	s	CAP, CHIP CERAMIC 47MF B(3225)
C11	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C12	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C13	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C15	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C19	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C24	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C29	1-100-670-91	s	CAP, CERAMIC 4.7MF C (2012)
C32	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C33	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C34	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C35	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C37	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C39	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C40	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C42	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C43	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C44	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C45	1-164-854-81	s	CAP, CHIP CERAMIC 15PF CH 1005
C47	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C48	1-164-843-81	s	CAP, CHIP CERAMIC 3PF CJ 1005
C49	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C50	1-107-826-91	s	CAP, CHIP CERAMIC 100000PF B
C51	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C52	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C53	1-100-670-91	s	CAP, CERAMIC 4.7MF C (2012)
C54	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C55	1-100-670-91	s	CAP, CERAMIC 4.7MF C (2012)
C57	1-100-670-91	s	CAP, CERAMIC 4.7MF C (2012)
C59	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C60	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C61	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C63	1-165-908-91	s	CAP, CERAMIC 1000000PF B 1608
C64	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C65	1-165-908-91	s	CAP, CERAMIC 1000000PF B 1608
C66	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C67	1-165-908-91	s	CAP, CERAMIC 1000000PF B 1608
C68	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C69	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C70	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C71	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C72	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C73	1-165-908-91	s	CAP, CERAMIC 1000000PF B 1608
C74	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C75	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C76	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C77	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C78	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C79	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C80	1-165-908-91	s	CAP, CERAMIC 1000000PF B 1608
C81	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C82	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C83	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(PA-329 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C84	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C85	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C86	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C87	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C88	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C89	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C91	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C93	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C94	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C95	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C96	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C97	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C98	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C99	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C100	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
CN1	1-794-142-31	s	CONNECTOR, FFC/FPC(ZIF) AN 36P
CN2	1-764-088-21	o	PIN, CONNECTOR (PC BOARD) 3P
D1	8-719-024-81	s	DIODE 1SS300-TE85L
E2	1-535-877-22	s	CHIP, CHECKER
FB1	1-400-334-21	s	FERRITE, EMI (SMD) (1608)
FB2	1-400-334-21	s	FERRITE, EMI (SMD) (1608)
FB3	1-400-334-21	s	FERRITE, EMI (SMD) (1608)
FB4	1-400-334-21	s	FERRITE, EMI (SMD) (1608)
FB5	1-400-334-21	s	FERRITE, EMI (SMD) (1608)
FB6	1-400-334-21	s	FERRITE, EMI (SMD) (1608)
IC1	8-759-689-09	s	IC SN65LVDT2DBVR
IC2	6-700-440-01	s	IC SN74ALVC32PWR
IC4	8-759-564-61	s	IC NC7SZ00P5X
IC6	8-759-564-61	s	IC NC7SZ00P5X
IC7	8-759-660-98	s	IC NC7SZ02P5
IC8	8-759-557-85	s	IC NC7SZ32P5X
IC9	6-709-147-01	s	IC SN74LVC2T45DCUR
IC10	6-709-147-01	s	IC SN74LVC2T45DCUR
IC11	6-709-147-01	s	IC SN74LVC2T45DCUR
IC13	6-706-863-01	s	IC LMH6732MFX/NOPB
IC15	8-759-346-27	s	IC LM45BIM3X
IC16	8-759-327-01	s	IC NJM062V(TE2)
IC18	8-759-557-85	s	IC NC7SZ32P5X
IC19	8-759-660-98	s	IC NC7SZ02P5
L1	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L2	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
LV1	1-456-815-11	s	COIL, VARIABLE
R1	1-208-855-81	s	RES, CHIP 47 (1005)
R2	1-208-855-81	s	RES, CHIP 47 (1005)
R3	1-220-878-81	s	RES, CHIP 22 (1005)
R4	1-208-863-81	s	RES, CHIP 100 (1005)
R6	1-220-878-81	s	RES, CHIP 22 (1005)
R9	1-208-863-81	s	RES, CHIP 100 (1005)
R10	1-208-871-81	s	RES, CHIP 220 (1005)
R13	1-208-855-81	s	RES, CHIP 47 (1005)
R14	1-208-871-81	s	RES, CHIP 220 (1005)
R16	1-208-863-81	s	RES, CHIP 100 (1005)
R17	1-208-871-81	s	RES, CHIP 220 (1005)
R21	1-220-870-81	s	RES, CHIP 10 (1005)
R22	1-220-870-81	s	RES, CHIP 10 (1005)

(PA-329 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R24	1-220-870-81	s	RES, CHIP 10 (1005)
R25	1-208-871-81	s	RES, CHIP 220 (1005)
R26	1-220-870-81	s	RES, CHIP 10 (1005)
R34	1-220-878-81	s	RES, CHIP 22 (1005)
R35	1-220-878-81	s	RES, CHIP 22 (1005)
R36	1-208-879-81	s	RES, CHIP 470 (1005)
R39	1-208-947-81	s	RES, CHIP 330K (1005)
R41	1-220-870-81	s	RES, CHIP 10 (1005)
R42	1-208-875-81	s	RES, CHIP 330 (1005)
R43	1-208-863-81	s	RES, CHIP 100 (1005)
R44	1-208-919-81	s	RES, CHIP 22K (1005)
R45	1-208-899-81	s	RES, CHIP 3.3K (1005)
R46	1-208-919-81	s	RES, CHIP 22K (1005)
R49	1-208-911-81	s	RES, CHIP 10K (1005)
R50	1-208-875-81	s	RES, CHIP 330 (1005)
R51	1-208-939-81	s	RES, CHIP 150K (1005)
R52	1-208-863-81	s	RES, CHIP 100 (1005)
R53	1-208-879-81	s	RES, CHIP 470 (1005)
R54	1-208-875-81	s	RES, CHIP 330 (1005)
R55	1-208-879-81	s	RES, CHIP 470 (1005)
R56	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R57	1-208-911-81	s	RES, CHIP 10K (1005)
R58	1-208-887-81	s	RES, CHIP 1.0K (1005)
R59	1-208-911-81	s	RES, CHIP 10K (1005)
R60	1-208-911-81	s	RES, CHIP 10K (1005)
R61	1-208-911-81	s	RES, CHIP 10K (1005)
R62	1-220-870-81	s	RES, CHIP 10 (1005)
R63	1-208-887-81	s	RES, CHIP 1.0K (1005)
R69	1-208-923-81	s	RES, CHIP 33K (1005)
R70	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R71	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R72	1-208-911-81	s	RES, CHIP 10K (1005)
R77	1-208-887-81	s	RES, CHIP 1.0K (1005)
R79	1-208-935-81	s	RES, CHIP 100K (1005)
R83	1-218-990-81	s	CONDUCTOR, CHIP (1005)

PA-330 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
C1	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C6	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C7	1-100-620-91	s	CAP, CHIP CERAMIC 47MF B(3225)
C8	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C10	1-100-620-91	s	CAP, CHIP CERAMIC 47MF B(3225)
C11	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C12	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C13	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C15	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C19	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C24	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C29	1-100-670-91	s	CAP, CERAMIC 4.7MF C (2012)
C32	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C33	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C34	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C35	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C37	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C39	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C40	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C42	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C43	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C44	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C45	1-164-854-81	s	CAP, CHIP CERAMIC 15PF CH 1005
C47	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C48	1-164-843-81	s	CAP, CHIP CERAMIC 3PF CJ 1005
C49	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C50	1-107-826-91	s	CAP, CHIP CERAMIC 100000PF B
C51	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C52	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C53	1-100-670-91	s	CAP, CERAMIC 4.7MF C (2012)
C54	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C55	1-100-670-91	s	CAP, CERAMIC 4.7MF C (2012)
C57	1-100-670-91	s	CAP, CERAMIC 4.7MF C (2012)
C59	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C60	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C61	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C63	1-165-908-91	s	CAP, CERAMIC 1000000PF B 1608
C64	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C65	1-165-908-91	s	CAP, CERAMIC 1000000PF B 1608
C66	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C67	1-165-908-91	s	CAP, CERAMIC 1000000PF B 1608
C68	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C69	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C70	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C71	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C72	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C73	1-165-908-91	s	CAP, CERAMIC 1000000PF B 1608
C74	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C75	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C76	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C77	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C78	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C79	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C80	1-165-908-91	s	CAP, CERAMIC 1000000PF B 1608
C81	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C82	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C83	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(PA-330 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C84	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C85	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C86	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C87	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C88	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C89	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C90	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C91	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C93	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C94	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C95	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C96	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C97	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C98	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C99	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C100	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
CN1	1-794-142-31	s	CONNECTOR, FFC/FPC(ZIF) AN 36P
CN2	1-764-078-21	s	PIN, CONNECTOR (PC BOARD) 3P
D1	8-719-024-81	s	DIODE 1SS300-TE85L
E2	1-535-877-22	s	CHIP, CHECKER
FB1	1-400-334-21	s	FERRITE, EMI (SMD) (1608)
FB2	1-400-334-21	s	FERRITE, EMI (SMD) (1608)
FB3	1-400-334-21	s	FERRITE, EMI (SMD) (1608)
FB4	1-400-334-21	s	FERRITE, EMI (SMD) (1608)
FB5	1-400-334-21	s	FERRITE, EMI (SMD) (1608)
FB6	1-400-334-21	s	FERRITE, EMI (SMD) (1608)
IC1	8-759-689-09	s	IC SN65LVDT2DBVR
IC2	6-700-440-01	s	IC SN74ALVC32PWR
IC4	8-759-564-61	s	IC NC7SZ00P5X
IC6	8-759-564-61	s	IC NC7SZ00P5X
IC7	8-759-660-98	s	IC NC7SZ02P5
IC8	8-759-557-85	s	IC NC7SZ32P5X
IC9	6-709-147-01	s	IC SN74LVC2T45DCUR
IC10	6-709-147-01	s	IC SN74LVC2T45DCUR
IC11	6-709-147-01	s	IC SN74LVC2T45DCUR
IC13	6-706-863-01	s	IC LMH6732MFX/NOPB
IC15	8-759-346-27	s	IC LM45BIM3X
IC16	8-759-327-01	s	IC NJM062V(TE2)
IC17	6-704-912-01	s	IC CAT24WC256XI-TE13
IC18	8-759-557-85	s	IC NC7SZ32P5X
IC19	8-759-660-98	s	IC NC7SZ02P5
L1	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L2	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
LV1	1-456-815-11	s	COIL, VARIABLE
R1	1-208-855-81	s	RES, CHIP 47 (1005)
R2	1-208-855-81	s	RES, CHIP 47 (1005)
R3	1-220-878-81	s	RES, CHIP 22 (1005)
R4	1-208-863-81	s	RES, CHIP 100 (1005)
R6	1-220-878-81	s	RES, CHIP 22 (1005)
R9	1-208-863-81	s	RES, CHIP 100 (1005)
R10	1-208-871-81	s	RES, CHIP 220 (1005)
R13	1-208-855-81	s	RES, CHIP 47 (1005)
R14	1-208-871-81	s	RES, CHIP 220 (1005)
R16	1-208-863-81	s	RES, CHIP 100 (1005)

(PA-330 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R17	1-208-871-81	s	RES, CHIP 220 (1005)
R21	1-220-870-81	s	RES, CHIP 10 (1005)
R22	1-220-870-81	s	RES, CHIP 10 (1005)
R24	1-220-870-81	s	RES, CHIP 10 (1005)
R25	1-208-871-81	s	RES, CHIP 220 (1005)
R26	1-220-870-81	s	RES, CHIP 10 (1005)
R34	1-220-878-81	s	RES, CHIP 22 (1005)
R35	1-220-878-81	s	RES, CHIP 22 (1005)
R36	1-208-879-81	s	RES, CHIP 470 (1005)
R39	1-208-947-81	s	RES, CHIP 330K (1005)
R41	1-220-870-81	s	RES, CHIP 10 (1005)
R42	1-208-875-81	s	RES, CHIP 330 (1005)
R43	1-208-863-81	s	RES, CHIP 100 (1005)
R44	1-208-919-81	s	RES, CHIP 22K (1005)
R45	1-208-899-81	s	RES, CHIP 3.3K (1005)
R46	1-208-919-81	s	RES, CHIP 22K (1005)
R49	1-208-911-81	s	RES, CHIP 10K (1005)
R50	1-208-875-81	s	RES, CHIP 330 (1005)
R51	1-208-939-81	s	RES, CHIP 150K (1005)
R52	1-208-863-81	s	RES, CHIP 100 (1005)
R53	1-208-879-81	s	RES, CHIP 470 (1005)
R54	1-208-875-81	s	RES, CHIP 330 (1005)
R55	1-208-879-81	s	RES, CHIP 470 (1005)
R56	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R57	1-208-911-81	s	RES, CHIP 10K (1005)
R58	1-208-887-81	s	RES, CHIP 1.0K (1005)
R59	1-208-911-81	s	RES, CHIP 10K (1005)
R60	1-208-911-81	s	RES, CHIP 10K (1005)
R61	1-208-911-81	s	RES, CHIP 10K (1005)
R62	1-220-870-81	s	RES, CHIP 10 (1005)
R63	1-208-887-81	s	RES, CHIP 1.0K (1005)
R69	1-208-923-81	s	RES, CHIP 33K (1005)
R70	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R71	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R72	1-208-911-81	s	RES, CHIP 10K (1005)
R73	1-208-863-81	s	RES, CHIP 100 (1005)
R74	1-208-863-81	s	RES, CHIP 100 (1005)
R77	1-208-887-81	s	RES, CHIP 1.0K (1005)
R79	1-208-903-81	s	RES, CHIP 4.7K (1005)
R83	1-218-990-81	s	CONDUCTOR, CHIP (1005)

PD-115 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1164-282-A	s	MOUNTED CIRCUIT BOARD, PD-115
C1	1-100-620-91	s	CAP, CHIP CERAMIC 47MF B(3225)
C2	1-100-620-91	s	CAP, CHIP CERAMIC 47MF B(3225)
C3	1-107-826-91	s	CAP, CHIP CERAMIC 100000PF B
C5	1-127-573-91	s	CAP, CHIP CERAMIC 1MF B (2012)
C6	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C7	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C8	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C9	1-107-826-91	s	CAP, CHIP CERAMIC 100000PF B
C10	1-100-352-91	s	CAP, CERAMIC 1MF C (1608)
C11	1-100-352-91	s	CAP, CERAMIC 1MF C (1608)
C12	1-125-898-91	s	CAP, CERAMIC 0.22MF B (3216)
C13	1-125-898-91	s	CAP, CERAMIC 0.22MF B (3216)
C14	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C15	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C16	1-107-826-91	s	CAP, CHIP CERAMIC 100000PF B
C17	1-127-760-91	s	CAP, CHIP CERAMIC 4.7MF B 2012
C18	1-107-826-91	s	CAP, CHIP CERAMIC 100000PF B
C19	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C20	1-107-826-91	s	CAP, CHIP CERAMIC 100000PF B
C21	1-127-573-91	s	CAP, CHIP CERAMIC 1MF B (2012)
C22	1-107-826-91	s	CAP, CHIP CERAMIC 100000PF B
C23	1-100-352-91	s	CAP, CERAMIC 1MF C (1608)
C24	1-107-826-91	s	CAP, CHIP CERAMIC 100000PF B
C25	1-107-826-91	s	CAP, CHIP CERAMIC 100000PF B
C27	1-107-826-91	s	CAP, CHIP CERAMIC 100000PF B
C28	1-107-826-91	s	CAP, CHIP CERAMIC 100000PF B
C29	1-107-826-91	s	CAP, CHIP CERAMIC 100000PF B
C30	1-162-968-91	s	CAP,CHIP CERAMIC 4700PF B 1608
C31	1-137-980-91	s	CAP,CHIP CERAMIC 0.47MF B 3216
C33	1-100-620-91	s	CAP, CHIP CERAMIC 47MF B(3225)
C34	1-100-620-91	s	CAP, CHIP CERAMIC 47MF B(3225)
C35	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C36	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C37	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
CN1	1-794-997-21	s	PIN, CONNECTOR 20P
CN2	1-774-261-31	s	CONNECTOR, FFC/FPC(ZIF) AN 24P
CN3	1-815-597-31	s	CONNECTOR, FFC/FPC (ZIF) AN 6P
CN5	1-794-377-21	s	PIN, CONNECTOR 8P
D1	8-719-016-95	s	DIODE 02DZ3.3-TPH3
D2	8-719-938-77	s	DIODE SB05-05C-TB-E
E1	1-535-757-21	s	CHIP, CHECKER
FB1	1-469-122-21	s	FERRITE, EMI (SMD) (1608)
IC1	8-753-213-67	s	IC CXA3662R-T4
IC2	8-759-524-20	s	IC TC74VHC165FT(EL)
IC3	8-759-468-72	s	IC AK6420AM-E2
IC4	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC6	6-706-484-01	s	IC TC7SH04FU(T5RSOYJF)
L1	1-412-951-21	s	INDUCTOR, SMALL TYPE 10UH 2520
L3	1-412-951-21	s	INDUCTOR, SMALL TYPE 10UH 2520
L4	1-416-510-21	s	COIL, CHOKE 100UH
L5	1-469-549-21	s	INDUCTOR, CHIP 1.0UH (LB2016)
Q1	8-729-019-83	s	TRANSISTOR HN1B04FU-YGR-TE85R
Q2	8-729-019-83	s	TRANSISTOR HN1B04FU-YGR-TE85R
Q3	8-729-019-83	s	TRANSISTOR HN1B04FU-YGR-TE85R
Q8	8-729-041-23	s	TRANSISTOR NDS356AP

(PD-115 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R9	1-208-879-81	s	RES, CHIP 470 (1005)
R10	1-208-919-81	s	RES, CHIP 22K (1005)
R12	1-208-935-81	s	RES, CHIP 100K (1005)
R13	1-208-943-81	s	RES, CHIP 220K (1005)
R14	1-208-935-81	s	RES, CHIP 100K (1005)
R15	1-208-911-81	s	RES, CHIP 10K (1005)
R16	1-208-935-81	s	RES, CHIP 100K (1005)
R17	1-208-863-81	s	RES, CHIP 100 (1005)
R18	1-208-911-81	s	RES, CHIP 10K (1005)
R20	1-208-911-81	s	RES, CHIP 10K (1005)
R21	1-220-870-81	s	RES, CHIP 10 (1005)
R22	1-208-951-81	s	RES, CHIP 470K (1005)
R25	1-208-943-81	s	RES, CHIP 220K (1005)
R26	1-220-870-81	s	RES, CHIP 10 (1005)
R27	1-208-919-81	s	RES, CHIP 22K (1005)
R28	1-208-943-81	s	RES, CHIP 220K (1005)
R29	1-208-951-81	s	RES, CHIP 470K (1005)
R30	1-220-870-81	s	RES, CHIP 10 (1005)
R31	1-208-911-81	s	RES, CHIP 10K (1005)
R32	1-220-870-81	s	RES, CHIP 10 (1005)
R33	1-220-870-81	s	RES, CHIP 10 (1005)
R34	1-208-951-81	s	RES, CHIP 470K (1005)
R35	1-208-951-81	s	RES, CHIP 470K (1005)
R36	1-208-959-81	s	RES, CHIP 1M (1005)
R37	1-220-870-81	s	RES, CHIP 10 (1005)
R38	1-220-870-81	s	RES, CHIP 10 (1005)
R39	1-220-870-81	s	RES, CHIP 10 (1005)
R51	1-208-935-81	s	RES, CHIP 100K (1005)
R52	1-208-935-81	s	RES, CHIP 100K (1005)
R53	1-208-935-81	s	RES, CHIP 100K (1005)
RB6	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB7	1-234-381-21	s	RES, NETWORK 100K (1005X4)
S1	1-771-138-62	s	SWITCH, KEY BOARD
S2	1-771-138-62	s	SWITCH, KEY BOARD
S3	1-771-138-62	s	SWITCH, KEY BOARD
S4	1-771-138-62	s	SWITCH, KEY BOARD

PS-708 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1164-283-A	s	MOUNTED CIRCUIT BOARD, PS-708
C1	1-100-713-11	s	CAP, DOUBLE LAYERS 4.7F
C2	1-100-713-11	s	CAP, DOUBLE LAYERS 4.7F
C3	1-100-713-11	s	CAP, DOUBLE LAYERS 4.7F
C4	1-100-713-11	s	CAP, DOUBLE LAYERS 4.7F
R1	1-208-911-81	s	RES, CHIP 10K (1005)
R2	1-208-911-81	s	RES, CHIP 10K (1005)
R3	1-208-911-81	s	RES, CHIP 10K (1005)
R4	1-208-911-81	s	RES, CHIP 10K (1005)

PSW-85 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1164-300-A	s	MOUNTED CIRCUIT BOARD, PSW-85
1pc	1-569-680-11	o	HOUSING, CONNECTOR 2P
S1	1-762-002-11	s	SWITCH, TOGGLE

RE-236 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1169-367-A	s	MOUNTED CIRCUIT BOARD, RE-236
C3	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C4	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C5	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C6	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C7	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C8	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C9	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C10	1-137-980-91	s	CAP,CHIP CERAMIC 0.47MF B 3216
C11	1-164-878-81	s	CAP,CHIP CERAMIC 150PF CH 1005
C12	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C13	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C14	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C15	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C16	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C17	1-127-760-91	s	CAP, CHIP CERAMIC 4.7MF B 2012
C18	1-127-760-91	s	CAP, CHIP CERAMIC 4.7MF B 2012
C19	1-127-760-91	s	CAP, CHIP CERAMIC 4.7MF B 2012
C20	1-125-889-91	s	CAP, CHIP CERAMIC 2.2MF B 2012
C21	1-127-760-91	s	CAP, CHIP CERAMIC 4.7MF B 2012
C22	1-165-908-91	s	CAP, CERAMIC 1000000PF B 1608
C23	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C24	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C25	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C26	1-127-760-91	s	CAP, CHIP CERAMIC 4.7MF B 2012
C28	1-127-760-91	s	CAP, CHIP CERAMIC 4.7MF B 2012
C30	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C31	1-100-552-21	s	CAP, ELECT 10MF (6.3X6)
C32	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C33	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C34	1-100-552-21	s	CAP, ELECT 10MF (6.3X6)
C35	1-100-552-21	s	CAP, ELECT 10MF (6.3X6)
C36	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C37	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C38	1-112-180-21	s	CAP, ALUMINIUM ELECT 150MF
C39	1-100-390-21	s	CAP, ELECT 180MF (6.3X6)
C40	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C41	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C42	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C43	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C44	1-128-991-21	s	CAP, ELECT 10MF (5.3X5.5)
C45	1-128-991-21	s	CAP, ELECT 10MF (5.3X5.5)
C46	1-137-757-21	s	CAP, ELECT 33MF (8X7)
C47	1-114-112-11	s	CAP, ELECT 100MF (6.3X7.7)
C48	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C49	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C50	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C51	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C52	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C53	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C54	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C55	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C56	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C57	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C58	1-128-991-21	s	CAP, ELECT 10MF (5.3X5.5)
C59	1-128-991-21	s	CAP, ELECT 10MF (5.3X5.5)
C60	1-135-349-21	s	CAP, ELECT 22MF (6.3X6)
C61	1-114-112-11	s	CAP, ELECT 100MF (6.3X7.7)

(RE-236 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C62	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C63	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C64	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C66	1-127-760-91	s	CAP, CHIP CERAMIC 4.7MF B 2012
C68	1-127-760-91	s	CAP, CHIP CERAMIC 4.7MF B 2012
C69	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C70	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C71	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C72	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C73	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C74	1-114-112-11	s	CAP, ELECT 100MF (6.3X7.7)
C75	1-165-887-91	s	CAP, CERAMIC 0.22MF (1005)
C76	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C77	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C78	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C79	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C80	1-137-894-21	s	CAP, ELECT (CHIP TYPE) 470MF
C81	1-112-727-21	s	CAP, ELECT 47MF (8.0X6.9)
C82	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C200	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C201	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C202	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C203	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C204	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C205	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C206	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C207	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C208	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C209	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C210	1-164-227-91	s	CAP,CERAMIC 22000PF B 1608
C211	1-164-227-91	s	CAP,CERAMIC 22000PF B 1608
C212	1-164-227-91	s	CAP,CERAMIC 22000PF B 1608
C213	1-164-227-91	s	CAP,CERAMIC 22000PF B 1608
C214	1-162-969-91	s	CAP, CERAMIC 6800PF B 1608
C215	1-164-227-91	s	CAP,CERAMIC 22000PF B 1608
C216	1-164-227-91	s	CAP,CERAMIC 22000PF B 1608
C217	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C218	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C219	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C220	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C221	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C222	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C223	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C224	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C225	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C226	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C227	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C228	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C229	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C230	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C231	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C236	1-100-390-21	s	CAP, ELECT 180MF (6.3X6)
C237	1-135-349-21	s	CAP, ELECT 22MF (6.3X6)
C238	1-112-180-21	s	CAP, ALUMINIUM ELECT 150MF
C239	1-112-180-21	s	CAP, ALUMINIUM ELECT 150MF
C240	1-135-349-21	s	CAP, ELECT 22MF (6.3X6)
C241	1-100-391-21	s	CAP, ELECT 180MF (5X6)
C242	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C243	1-165-989-91	s	CAP, CERAMIC 10MF (2012)

(RE-236 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C244	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C245	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C246	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C247	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C248	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C249	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C250	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C251	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C252	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C253	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C254	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C255	1-164-227-91	s	CAP,CERAMIC 22000PF B 1608
C256	1-164-227-91	s	CAP,CERAMIC 22000PF B 1608
C257	1-162-969-91	s	CAP, CERAMIC 6800PF B 1608
C258	1-164-227-91	s	CAP,CERAMIC 22000PF B 1608
C259	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C260	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C261	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C262	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C263	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C264	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C265	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C268	1-100-390-21	s	CAP, ELECT 180MF (6.3X6)
C269	1-135-349-21	s	CAP, ELECT 22MF (6.3X6)
C270	1-100-391-21	s	CAP, ELECT 180MF (5X6)
C271	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C272	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C273	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C274	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C400	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C402	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C403	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C405	1-135-348-21	s	CAP, ELECT 150MF (10X8)
C406	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C407	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C409	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C410	1-100-552-21	s	CAP, ELECT 10MF (6.3X6)
C411	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C412	1-115-340-91	s	CAP, CERAMIC 0.22MF B (2012)
C413	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C414	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C415	1-125-898-91	s	CAP, CERAMIC 0.22MF B (3216)
C416	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C418	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C420	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C421	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C422	1-164-882-81	s	CAP,CHIP CERAMIC 220PF CH 1005
C423	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C424	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C425	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
CN1	1-815-889-21	s	PIN, CONNECTOR (PC BOARD) 14P
CN2	1-778-616-21	o	PIN, CONNECTOR (PC BOARD) 13P
CN3	1-818-033-21	o	PIN, CONNECTOR (PC BOARD)
CN400	1-764-250-21	o	PIN, CONNECTOR (PC BOARD) 4P
D1	8-719-938-77	s	DIODE SB05-05C-TB-E
D3	8-719-072-43	s	DIODE RB050L-40TE25
D4	8-719-037-41	s	DIODE RD20SB-T1
D5	6-500-215-01	s	DIODE M2FM3
D6	6-500-215-01	s	DIODE M2FM3

(RE-236 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
D7	8-719-074-48	s	DIODE HSU83TRF
D8	8-719-987-19	s	DIODE SB01-15C-TB-E
D9	8-719-987-19	s	DIODE SB01-15C-TB-E
D10	8-719-987-21	s	DIODE SB02-09CP-TB-E
D11	8-719-987-21	s	DIODE SB02-09CP-TB-E
D12	8-719-938-77	s	DIODE SB05-05C-TB-E
D13	8-719-938-77	s	DIODE SB05-05C-TB-E
D14	8-719-069-28	s	DIODE 1SS400TE-61
D15	8-719-991-01	s	DIODE DAP222-TL
D16	8-719-069-28	s	DIODE 1SS400TE-61
D18	6-500-215-01	s	DIODE M2FM3
D19	8-719-069-28	s	DIODE 1SS400TE-61
D20	8-719-037-24	s	DIODE RD12SB3-T1
D201	8-719-065-59	s	DIODE MBR0530T1
D202	8-719-065-59	s	DIODE MBR0530T1
D203	8-719-065-59	s	DIODE MBR0530T1
D204	8-719-065-59	s	DIODE MBR0530T1
D206	8-719-065-59	s	DIODE MBR0530T1
D207	8-719-065-59	s	DIODE MBR0530T1
D208	8-719-069-28	s	DIODE 1SS400TE-61
D209	8-719-069-28	s	DIODE 1SS400TE-61
D210	8-719-069-28	s	DIODE 1SS400TE-61
D401	8-719-016-75	s	DIODE 1SS352-TPH3
D402	6-500-215-01	s	DIODE M2FM3
E1	1-535-877-22	s	CHIP, CHECKER
E2	1-535-877-22	s	CHIP, CHECKER
FB400	1-414-772-21	s	FERRITE. EMI (SMD) (2012)
FL400	1-234-851-11	s	FILTER, EMI REMOVAL
FL401	1-234-851-11	s	FILTER, EMI REMOVAL
IC1	6-707-828-01	s	IC MM1431ANRE
IC2	8-759-669-64	s	IC TL1451ACPWR-12
IC3	8-759-669-64	s	IC TL1451ACPWR-12
IC4	8-759-653-03	s	IC NJM78M05DL1A-TE1
IC5	6-707-828-01	s	IC MM1431ANRE
IC6	8-759-669-64	s	IC TL1451ACPWR-12
IC7	8-759-338-95	s	IC NJM2903V(TE2)
IC8	8-759-338-95	s	IC NJM2903V(TE2)
IC200	6-702-510-01	s	IC TPS5120DBTRG4
IC201	6-702-510-01	s	IC TPS5120DBTRG4
IC202	6-702-510-01	s	IC TPS5120DBTRG4
IC400	6-701-652-01	s	IC MAX4374TEUB+TG069
L1	1-456-622-21	s	COIL, CHOKE 1UH
L2	1-456-622-21	s	COIL, CHOKE 1UH
L3	1-456-622-21	s	COIL, CHOKE 1UH
L4	1-456-622-21	s	COIL, CHOKE 1UH
L5	1-419-368-41	s	COIL, CHOKE 47UH
L6	1-419-368-41	s	COIL, CHOKE 47UH
L7	1-456-622-21	s	COIL, CHOKE 1UH
L8	1-414-852-41	s	INDUCTOR (SMD) 470.0UH
L9	1-414-852-41	s	INDUCTOR (SMD) 470.0UH
L10	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L11	1-414-402-41	s	INDUCTOR (SMD) 47.0UH
L12	1-456-622-21	s	COIL, CHOKE 1UH
L13	1-456-622-21	s	COIL, CHOKE 1UH
L14	1-456-647-11	s	COIL, CHOKE (SMD) 10UH
L15	1-456-622-21	s	COIL, CHOKE 1UH

(RE-236 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
L16	1-410-283-11	s	INDUCTOR (WITH CORE)
L200	1-456-046-21	s	COIL, CHOKE (SMD) 10UH(10X10)
L201	1-469-848-21	s	INDUCTOR (SMD)
L202	1-456-046-21	s	COIL, CHOKE (SMD) 10UH(10X10)
L203	1-469-848-21	s	INDUCTOR (SMD)
L204	1-456-622-21	s	COIL, CHOKE 1UH
L205	1-456-622-21	s	COIL, CHOKE 1UH
L206	1-456-622-21	s	COIL, CHOKE 1UH
L207	1-400-207-21	s	COIL, CHOKE 1.0UH
L208	1-456-046-21	s	COIL, CHOKE (SMD) 10UH(10X10)
L209	1-456-046-21	s	COIL, CHOKE (SMD) 10UH(10X10)
L210	1-456-622-21	s	COIL, CHOKE 1UH
L211	1-456-622-21	s	COIL, CHOKE 1UH
L400	1-457-043-11	s	COIL, CHOKE (19.6UH)
L401	1-469-549-21	s	INDUCTOR, CHIP 1.0UH (LB2016)
L402	1-457-046-11	s	COIL, CHOKE (2.0UH)
PS1	1-576-269-21	s	FUSE (SMD) (3.15A/125V)
PS2	1-576-269-21	s	FUSE (SMD) (3.15A/125V)
Q1	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q2	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q3	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q5	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q6	8-729-929-27	s	TRANSISTOR DTC114TE-TL
Q7	8-729-929-27	s	TRANSISTOR DTC114TE-TL
Q8	8-729-929-27	s	TRANSISTOR DTC114TE-TL
Q9	8-729-929-27	s	TRANSISTOR DTC114TE-TL
Q10	8-729-929-27	s	TRANSISTOR DTC114TE-TL
Q11	8-729-012-34	s	TRANSISTOR 2SK711-BL(TE85L)
Q12	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q13	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q14	8-729-012-34	s	TRANSISTOR 2SK711-BL(TE85L)
Q15	8-729-012-34	s	TRANSISTOR 2SK711-BL(TE85L)
Q16	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q17	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q18	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q19	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q20	6-550-022-01	s	TRANSISTOR SI9407AEY-T1
Q21	8-729-045-53	s	TRANSISTOR SI4431DY-T1
Q22	8-729-045-53	s	TRANSISTOR SI4431DY-T1
Q23	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q24	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q26	8-729-929-27	s	TRANSISTOR DTC114TE-TL
Q27	8-729-929-27	s	TRANSISTOR DTC114TE-TL
Q28	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q29	8-729-012-34	s	TRANSISTOR 2SK711-BL(TE85L)
Q30	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q31	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q32	8-729-045-53	s	TRANSISTOR SI4431DY-T1
Q33	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q34	8-729-929-27	s	TRANSISTOR DTC114TE-TL
Q35	8-729-929-27	s	TRANSISTOR DTC114TE-TL
Q36	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q37	8-729-929-27	s	TRANSISTOR DTC114TE-TL
Q38	8-729-929-27	s	TRANSISTOR DTC114TE-TL
Q200	6-551-144-01	s	TRANSISTOR HAT2198R-EL-E
Q201	6-551-144-01	s	TRANSISTOR HAT2198R-EL-E
Q202	8-729-054-67	s	TRANSISTOR FDS6690S
Q203	6-551-144-01	s	TRANSISTOR HAT2198R-EL-E

(RE-236 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
Q204	8-729-929-27	s	TRANSISTOR DTC114TE-TL
Q205	8-729-929-27	s	TRANSISTOR DTC114TE-TL
Q206	8-729-929-27	s	TRANSISTOR DTC114TE-TL
Q207	8-729-929-27	s	TRANSISTOR DTC114TE-TL
Q208	8-729-929-27	s	TRANSISTOR DTC114TE-TL
Q209	8-729-929-27	s	TRANSISTOR DTC114TE-TL
Q210	8-729-054-67	s	TRANSISTOR FDS6690S
Q211	8-729-054-67	s	TRANSISTOR FDS6690S
Q212	8-729-929-27	s	TRANSISTOR DTC114TE-TL
Q213	8-729-929-27	s	TRANSISTOR DTC114TE-TL
Q214	8-729-929-27	s	TRANSISTOR DTC114TE-TL
Q215	6-551-144-01	s	TRANSISTOR HAT2198R-EL-E
Q216	6-551-144-01	s	TRANSISTOR HAT2198R-EL-E
Q217	6-551-144-01	s	TRANSISTOR HAT2198R-EL-E
Q218	8-729-046-04	s	TRANSISTOR FDS6690A
Q219	8-729-046-04	s	TRANSISTOR FDS6690A
Q220	8-729-046-04	s	TRANSISTOR FDS6690A
Q221	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q222	8-729-929-27	s	TRANSISTOR DTC114TE-TL
Q400	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q401	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q403	6-551-144-01	s	TRANSISTOR HAT2198R-EL-E
Q404	6-551-144-01	s	TRANSISTOR HAT2198R-EL-E
Q405	8-729-928-82	s	TRANSISTOR DTC144EE-TL
R1	1-208-907-81	s	RES, CHIP 6.8K (1005)
R2	1-208-907-81	s	RES, CHIP 6.8K (1005)
R3	1-208-907-81	s	RES, CHIP 6.8K (1005)
R4	1-208-903-81	s	RES, CHIP 4.7K (1005)
R5	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R6	1-208-895-81	s	RES, CHIP 2.2K (1005)
R7	1-208-863-81	s	RES, CHIP 100 (1005)
R8	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R9	1-208-899-81	s	RES, CHIP 3.3K (1005)
R10	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R11	1-208-903-81	s	RES, CHIP 4.7K (1005)
R12	1-208-919-81	s	RES, CHIP 22K (1005)
R13	1-208-887-81	s	RES, CHIP 1.0K (1005)
R14	1-208-899-81	s	RES, CHIP 3.3K (1005)
R15	1-208-887-81	s	RES, CHIP 1.0K (1005)
R16	1-208-879-81	s	RES, CHIP 470 (1005)
R17	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R19	1-208-879-81	s	RES, CHIP 470 (1005)
R20	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R21	1-208-919-81	s	RES, CHIP 22K (1005)
R22	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R23	1-208-903-81	s	RES, CHIP 4.7K (1005)
R24	1-208-931-81	s	RES, CHIP 68K (1005)
R25	1-208-895-81	s	RES, CHIP 2.2K (1005)
R26	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R27	1-208-915-81	s	RES, CHIP 15K (1005)
R28	1-208-887-81	s	RES, CHIP 1.0K (1005)
R29	1-208-871-81	s	RES, CHIP 220 (1005)
R30	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R31	1-208-903-81	s	RES, CHIP 4.7K (1005)
R32	1-208-903-81	s	RES, CHIP 4.7K (1005)
R33	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R34	1-208-899-81	s	RES, CHIP 3.3K (1005)
R35	1-208-903-81	s	RES, CHIP 4.7K (1005)
R36	1-208-903-81	s	RES, CHIP 4.7K (1005)

(RE-236 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R37	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R38	1-208-907-81	s	RES, CHIP 6.8K (1005)
R39	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R40	1-208-903-81	s	RES, CHIP 4.7K (1005)
R41	1-208-887-81	s	RES, CHIP 1.0K (1005)
R42	1-208-863-81	s	RES, CHIP 100 (1005)
R43	1-208-911-81	s	RES, CHIP 10K (1005)
R45	1-208-903-81	s	RES, CHIP 4.7K (1005)
R46	1-208-903-81	s	RES, CHIP 4.7K (1005)
R47	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R48	1-208-943-81	s	RES, CHIP 220K (1005)
R49	1-208-927-81	s	RES, CHIP 47K (1005)
R50	1-208-943-81	s	RES, CHIP 220K (1005)
R51	1-208-935-81	s	RES, CHIP 100K (1005)
R52	1-208-919-81	s	RES, CHIP 22K (1005)
R60	1-208-927-81	s	RES, CHIP 47K (1005)
R62	1-208-927-81	s	RES, CHIP 47K (1005)
R63	1-208-903-81	s	RES, CHIP 4.7K (1005)
R64	1-208-911-81	s	RES, CHIP 10K (1005)
R65	1-208-935-81	s	RES, CHIP 100K (1005)
R66	1-208-923-81	s	RES, CHIP 33K (1005)
R67	1-208-923-81	s	RES, CHIP 33K (1005)
R68	1-208-887-81	s	RES, CHIP 1.0K (1005)
R69	1-208-915-81	s	RES, CHIP 15K (1005)
R70	1-208-887-81	s	RES, CHIP 1.0K (1005)
R71	1-208-903-81	s	RES, CHIP 4.7K (1005)
R72	1-208-935-81	s	RES, CHIP 100K (1005)
R73	1-208-919-81	s	RES, CHIP 22K (1005)
R74	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R75	1-208-923-81	s	RES, CHIP 33K (1005)
R76	1-208-875-81	s	RES, CHIP 330 (1005)
R77	1-208-859-81	s	RES, CHIP 68 (1005)
R78	1-208-859-81	s	RES, CHIP 68 (1005)
R79	1-208-859-81	s	RES, CHIP 68 (1005)
R80	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R81	1-208-935-81	s	RES, CHIP 100K (1005)
R82	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R83	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R84	1-208-911-81	s	RES, CHIP 10K (1005)
R85	1-208-911-81	s	RES, CHIP 10K (1005)
R86	1-208-887-81	s	RES, CHIP 1.0K (1005)
R87	1-208-903-81	s	RES, CHIP 4.7K (1005)
R88	1-208-931-81	s	RES, CHIP 68K (1005)
R89	1-208-919-81	s	RES, CHIP 22K (1005)
R90	1-208-919-81	s	RES, CHIP 22K (1005)
R91	1-208-939-81	s	RES, CHIP 150K (1005)
R92	1-208-915-81	s	RES, CHIP 15K (1005)
R93	1-208-927-81	s	RES, CHIP 47K (1005)
R94	1-208-911-81	s	RES, CHIP 10K (1005)
R95	1-208-915-81	s	RES, CHIP 15K (1005)
R96	1-208-927-81	s	RES, CHIP 47K (1005)
R97	1-208-919-81	s	RES, CHIP 22K (1005)
R98	1-208-943-81	s	RES, CHIP 220K (1005)
R99	1-208-911-81	s	RES, CHIP 10K (1005)
R100	1-208-887-81	s	RES, CHIP 1.0K (1005)
R101	1-208-883-81	s	RES, CHIP 680 (1005)
R102	1-208-927-81	s	RES, CHIP 47K (1005)
R103	1-208-919-81	s	RES, CHIP 22K (1005)
R104	1-208-919-81	s	RES, CHIP 22K (1005)

(RE-236 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R105	1-208-903-81	s	RES, CHIP 4.7K (1005)
R106	1-208-903-81	s	RES, CHIP 4.7K (1005)
R107	1-208-935-81	s	RES, CHIP 100K (1005)
R108	1-208-903-81	s	RES, CHIP 4.7K (1005)
R109	1-208-895-81	s	RES, CHIP 2.2K (1005)
R110	1-208-935-81	s	RES, CHIP 100K (1005)
R111	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R113	1-208-927-81	s	RES, CHIP 47K (1005)
R115	1-220-870-81	s	RES, CHIP 10 (1005)
R116	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R117	1-208-919-81	s	RES, CHIP 22K (1005)
R118	1-208-927-81	s	RES, CHIP 47K (1005)
R119	1-208-927-81	s	RES, CHIP 47K (1005)
R120	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R121	1-208-919-81	s	RES, CHIP 22K (1005)
R122	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R124	1-208-923-81	s	RES, CHIP 33K (1005)
R125	1-208-859-81	s	RES, CHIP 68 (1005)
R126	1-208-935-81	s	RES, CHIP 100K (1005)
R127	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R129	1-208-931-81	s	RES, CHIP 68K (1005)
R130	1-208-919-81	s	RES, CHIP 22K (1005)
R131	1-208-883-81	s	RES, CHIP 680 (1005)
R132	1-208-935-81	s	RES, CHIP 100K (1005)
R133	1-208-927-81	s	RES, CHIP 47K (1005)
R134	1-208-919-81	s	RES, CHIP 22K (1005)
R135	1-208-879-81	s	RES, CHIP 470 (1005)
R136	1-208-879-81	s	RES, CHIP 470 (1005)
R137	1-208-919-81	s	RES, CHIP 22K (1005)
R138	1-208-911-81	s	RES, CHIP 10K (1005)
R201	1-208-935-81	s	RES, CHIP 100K (1005)
R203	1-208-935-81	s	RES, CHIP 100K (1005)
R206	1-208-923-81	s	RES, CHIP 33K (1005)
R207	1-208-907-81	s	RES, CHIP 6.8K (1005)
R208	1-208-911-81	s	RES, CHIP 10K (1005)
R209	1-208-863-81	s	RES, CHIP 100 (1005)
R210	1-208-863-81	s	RES, CHIP 100 (1005)
R211	1-208-863-81	s	RES, CHIP 100 (1005)
R212	1-208-915-81	s	RES, CHIP 15K (1005)
R213	1-208-863-81	s	RES, CHIP 100 (1005)
R214	1-208-863-81	s	RES, CHIP 100 (1005)
R215	1-208-863-81	s	RES, CHIP 100 (1005)
R216	1-208-907-81	s	RES, CHIP 6.8K (1005)
R217	1-208-879-81	s	RES, CHIP 470 (1005)
R218	1-208-887-81	s	RES, CHIP 1.0K (1005)
R219	1-208-899-81	s	RES, CHIP 3.3K (1005)
R220	1-208-887-81	s	RES, CHIP 1.0K (1005)
R221	1-208-875-81	s	RES, CHIP 330 (1005)
R222	1-208-875-81	s	RES, CHIP 330 (1005)
R223	1-208-887-81	s	RES, CHIP 1.0K (1005)
R224	1-208-907-81	s	RES, CHIP 6.8K (1005)
R225	1-208-883-81	s	RES, CHIP 680 (1005)
R226	1-208-883-81	s	RES, CHIP 680 (1005)
R227	1-208-907-81	s	RES, CHIP 6.8K (1005)
R228	1-208-911-81	s	RES, CHIP 10K (1005)
R229	1-208-887-81	s	RES, CHIP 1.0K (1005)
R230	1-208-923-81	s	RES, CHIP 33K (1005)
R231	1-208-895-81	s	RES, CHIP 2.2K (1005)
R232	1-208-895-81	s	RES, CHIP 2.2K (1005)

(RE-236 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R233	1-208-923-81	s	RES, CHIP 33K (1005)
R234	1-208-907-81	s	RES, CHIP 6.8K (1005)
R235	1-208-923-81	s	RES, CHIP 33K (1005)
R236	1-208-883-81	s	RES, CHIP 680 (1005)
R237	1-208-907-81	s	RES, CHIP 6.8K (1005)
R238	1-208-923-81	s	RES, CHIP 33K (1005)
R239	1-208-895-81	s	RES, CHIP 2.2K (1005)
R240	1-208-899-81	s	RES, CHIP 3.3K (1005)
R241	1-208-883-81	s	RES, CHIP 680 (1005)
R242	1-208-883-81	s	RES, CHIP 680 (1005)
R243	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R244	1-208-883-81	s	RES, CHIP 680 (1005)
R245	1-208-887-81	s	RES, CHIP 1.0K (1005)
R246	1-208-903-81	s	RES, CHIP 4.7K (1005)
R247	1-208-883-81	s	RES, CHIP 680 (1005)
R252	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R253	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R254	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R255	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R256	1-208-919-81	s	RES, CHIP 22K (1005)
R257	1-208-919-81	s	RES, CHIP 22K (1005)
R258	1-208-919-81	s	RES, CHIP 22K (1005)
R259	1-208-919-81	s	RES, CHIP 22K (1005)
R260	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R261	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R262	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R263	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R264	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R265	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R266	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R267	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R273	1-208-935-81	s	RES, CHIP 100K (1005)
R275	1-208-907-81	s	RES, CHIP 6.8K (1005)
R276	1-208-919-81	s	RES, CHIP 22K (1005)
R277	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R278	1-208-907-81	s	RES, CHIP 6.8K (1005)
R280	1-208-863-81	s	RES, CHIP 100 (1005)
R281	1-208-863-81	s	RES, CHIP 100 (1005)
R282	1-208-863-81	s	RES, CHIP 100 (1005)
R283	1-208-895-81	s	RES, CHIP 2.2K (1005)
R284	1-208-883-81	s	RES, CHIP 680 (1005)
R285	1-208-907-81	s	RES, CHIP 6.8K (1005)
R286	1-208-911-81	s	RES, CHIP 10K (1005)
R287	1-208-887-81	s	RES, CHIP 1.0K (1005)
R288	1-208-923-81	s	RES, CHIP 33K (1005)
R289	1-208-895-81	s	RES, CHIP 2.2K (1005)
R290	1-208-911-81	s	RES, CHIP 10K (1005)
R291	1-208-923-81	s	RES, CHIP 33K (1005)
R292	1-208-899-81	s	RES, CHIP 3.3K (1005)
R293	1-208-883-81	s	RES, CHIP 680 (1005)
R294	1-208-883-81	s	RES, CHIP 680 (1005)
R295	1-208-895-81	s	RES, CHIP 2.2K (1005)
R296	1-208-871-81	s	RES, CHIP 220 (1005)
R298	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R299	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R300	1-208-919-81	s	RES, CHIP 22K (1005)
R301	1-208-919-81	s	RES, CHIP 22K (1005)
R302	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R303	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(RE-236 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R304	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R305	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R308	1-208-919-81	s	RES, CHIP 22K (1005)
R400	1-208-911-81	s	RES, CHIP 10K (1005)
R401	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R402	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R403	1-208-951-81	s	RES, CHIP 470K (1005)
R404	1-208-855-81	s	RES, CHIP 47 (1005)
R405	1-208-919-81	s	RES, CHIP 22K (1005)
R406	1-208-907-81	s	RES, CHIP 6.8K (1005)
R407	1-208-919-81	s	RES, CHIP 22K (1005)
R408	1-208-911-81	s	RES, CHIP 10K (1005)
R409	1-208-887-81	s	RES, CHIP 1.0K (1005)
R410	1-208-935-81	s	RES, CHIP 100K (1005)
R411	1-219-684-21	s	RES, CHIP (SQUARE TYPE) 0.01
R413	1-208-887-81	s	RES, CHIP 1.0K (1005)
R414	1-208-911-81	s	RES, CHIP 10K (1005)
R415	1-208-895-81	s	RES, CHIP 2.2K (1005)
R416	1-208-895-81	s	RES, CHIP 2.2K (1005)
R418	1-208-935-81	s	RES, CHIP 100K (1005)
R420	1-208-919-81	s	RES, CHIP 22K (1005)
R421	1-208-911-81	s	RES, CHIP 10K (1005)
R422	1-208-911-81	s	RES, CHIP 10K (1005)
R424	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R425	1-219-684-21	s	RES, CHIP (SQUARE TYPE) 0.01
R427	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R428	1-208-927-81	s	RES, CHIP 47K (1005)
R429	1-218-990-81	s	CONDUCTOR, CHIP (1005)
T1	1-443-967-11	s	TRANSFORMER, DC-DC CONVERTER

RM-203 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1164-288-A	s	MOUNTED CIRCUIT BOARD, RM-203
CN2	1-766-696-11	o	CONNECTOR, ROUND TYPE 8P
FB1	1-469-108-21	s	FERRITE, EMI (SMD) (1608)
FB2	1-469-108-21	s	FERRITE, EMI (SMD) (1608)
FB3	1-469-108-21	s	FERRITE, EMI (SMD) (1608)
FB4	1-469-108-21	s	FERRITE, EMI (SMD) (1608)
FB7	1-414-445-21	s	FERRITE, EMI (SMD) (1608)
FB8	1-414-445-21	s	FERRITE, EMI (SMD) (1608)
FL1	1-234-851-11	s	FILTER, EMI REMOVAL
FL2	1-234-851-11	s	FILTER, EMI REMOVAL

RX-96 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1164-294-A	s	MOUNTED CIRCUIT BOARD, RX-96
CN1	1-784-720-12	s	PIN, CONNECTOR (PC BOARD TYPE)
CN2	1-569-775-21	o	PIN, CONNECTOR (SMD) 5P
FB1	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB3	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB4	1-414-445-21	s	FERRITE, EMI (SMD) (1608)
THP1	⚠ 1-803-615-21	s	THERMISTOR, POSITIVE

SE-709 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8347-272-A	s	MOUNTED CIRCUIT BOARD, SE-709
C1	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
CN1	1-764-093-21	o	PIN, CONNECTOR (PC BOARD) 8P
CN2	1-580-055-21	o	PIN, CONNECTOR (SMD) 2P
PH1	8-719-988-19	s	PHTO REFLECTOR PR-11-C-T
PH2	8-719-988-19	s	PHTO REFLECTOR PR-11-C-T
PH3	8-719-988-19	s	PHTO REFLECTOR PR-11-C-T
PH4	8-719-988-19	s	PHTO REFLECTOR PR-11-C-T
R1	1-208-879-81	s	RES, CHIP 470 (1005)
R2	1-208-879-81	s	RES, CHIP 470 (1005)
R3	1-208-879-81	s	RES, CHIP 470 (1005)
R4	1-208-879-81	s	RES, CHIP 470 (1005)
R5	1-208-935-81	s	RES, CHIP 100K (1005)
R6	1-208-935-81	s	RES, CHIP 100K (1005)
R7	1-208-935-81	s	RES, CHIP 100K (1005)
R8	1-208-935-81	s	RES, CHIP 100K (1005)

SE-743 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1164-311-A	s	MOUNTED CIRCUIT BOARD, SE-743
C1	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
CN1	1-573-290-21	s	PIN, CONNECTOR (1.5MM) (SMD)4P
PH1	6-600-300-01	s	IC NJL5901R (TE1)
PH2	6-600-300-01	s	IC NJL5901R (TE1)
R1	1-208-895-81	s	RES, CHIP 2.2K (1005)
R2	1-208-895-81	s	RES, CHIP 2.2K (1005)

SE-800 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1097-229-A	s	MOUNTED CIRCUIT BOARD, SE-800
C1	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C3	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
CN1	1-580-057-21	s	PIN, CONNECTOR (SMD) 4P
IC1	8-759-714-09	s	IC ADXL202JE-REEL
R1	1-208-931-81	s	RES, CHIP 68K (1005)

SW-1124G BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1138-488-A	s	MOUNTED CIRCUIT BOARD, SW-1124G
S1	⚠ 1-762-805-41	s	SWITCH, PUSH (1 KEY)
S2	⚠ 1-762-805-41	s	SWITCH, PUSH (1 KEY)

SW-1125G BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1138-489-A	s	MOUNTED CIRCUIT BOARD, SW-1125G
CN1	1-774-873-61	s	CONNECTOR, FPC 6P
S1	⚠ 1-572-288-21	s	SWITCH, PUSH
S2	⚠ 1-762-805-41	s	SWITCH, PUSH (1 KEY)

SW-1246 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1171-839-A	s	MOUNTED CIRCUIT BOARD, SW-1246
C5	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C6	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C8	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C9	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C10	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
CN1	1-695-320-21	o	PIN, CONNECTOR (1.5MM)(SMD) 2P
CN2	1-691-591-21	o	PIN, CONNECTOR (1.5MM) (SMD)8P
D1	8-719-048-98	s	DIODE RB160L-40TE25
PH1	8-719-069-53	s	DIODE CPI-210-T
PH2	8-719-069-53	s	DIODE CPI-210-T
PS1	1-576-677-21	s	RINK, IC (4A/72V)
Q5	6-551-265-01	s	TRANSISTOR SI2307BDS-T1
Q6	6-550-980-01	s	TRANSISTOR RN1904(T5RSONY,D,F)
R2	1-208-935-81	s	RES, CHIP 100K (1005)
R3	1-208-919-81	s	RES, CHIP 22K (1005)
R4	1-208-935-81	s	RES, CHIP 100K (1005)
R6	1-208-875-81	s	RES, CHIP 330 (1005)
R8	1-208-919-81	s	RES, CHIP 22K (1005)
R12	1-208-919-81	s	RES, CHIP 22K (1005)

SW-1249 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1164-298-A	s	MOUNTED CIRCUIT BOARD, SW-1249
C1	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C2	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
CN1	1-580-056-21	s	PIN, CONNECTOR (SMD) 3P
R1	1-218-847-91	s	RES, CHIP 1.0K (1608)
R2	1-218-847-91	s	RES, CHIP 1.0K (1608)
S1	1-771-348-11	s	SWITCH, TACTILE
S2	1-771-348-11	s	SWITCH, TACTILE

SY-322 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1169-370-A	s	MOUNTED CIRCUIT BOARD, SY-322
C100	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C101	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C102	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C103	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C200	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C201	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C202	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C203	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C204	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C205	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C206	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C207	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C208	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C209	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C210	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C213	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C217	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C218	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C219	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C220	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C221	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C222	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C223	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C224	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C225	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C226	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C227	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C228	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C229	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C230	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C231	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C232	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C233	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C234	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C235	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C236	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C237	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C238	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C239	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C240	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C241	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C242	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C243	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C244	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C245	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C246	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C247	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C248	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C250	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C251	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C254	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C255	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C256	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C257	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C258	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C259	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C260	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(SY-322 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C261	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C262	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C263	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C264	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C265	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C266	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C267	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C268	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C300	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C301	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C302	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C303	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C304	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C305	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C306	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C307	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C317	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C318	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C319	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C320	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C321	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C322	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C323	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C324	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C325	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C326	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C327	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C328	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C329	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C330	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C331	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C332	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C333	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C335	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C400	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C401	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C403	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C404	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C405	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C406	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C407	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C408	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C409	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C410	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C411	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C412	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C413	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C414	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C500	1-164-848-81	s	CAP, CHIP CERAMIC 8PF CH 1005
C501	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C502	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C503	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C504	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C505	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C506	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C507	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C508	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C509	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C510	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)

(SY-322 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C511	1-100-352-91	s	CAP, CERAMIC 1MF C (1608)
C512	1-164-882-81	s	CAP,CHIP CERAMIC 220PF CH 1005
C513	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C514	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C515	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C516	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C517	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C518	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C519	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C520	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
CN201	1-573-290-21	s	PIN, CONNECTOR (1.5MM) (SMD)4P
CN500	1-691-551-21	o	PIN, CONNECTOR (SMD) 8P
D200	8-719-074-31	s	DIODE CL-196YG-CD-T
D400	8-719-074-31	s	DIODE CL-196YG-CD-T
D401	8-719-074-31	s	DIODE CL-196YG-CD-T
D500	6-500-750-01	s	DIODE NSAD500H-T1-A
E101	1-535-757-21	s	CHIP, CHECKER
E102	1-535-757-21	s	CHIP, CHECKER
E103	1-535-757-21	s	CHIP, CHECKER
E104	1-535-757-21	s	CHIP, CHECKER
E105	1-535-757-21	s	CHIP, CHECKER
E106	1-535-757-21	s	CHIP, CHECKER
FB200	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB201	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB202	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB203	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB500	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB501	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB502	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
IC201	6-703-875-01	s	IC CDCVF2505PWR
IC203	6-702-156-01	s	IC AK6510CM-E2
IC204	6-706-492-01	s	IC TC7SHU04FU(T5RSOJF)
IC205	6-704-566-01	s	IC R3112N291A-TR-FA
IC210	6-706-007-01	s	IC HY57V561620CTP-HDR
IC211	6-706-007-01	s	IC HY57V561620CTP-HDR
IC215	6-706-007-01	s	IC HY57V561620CTP-HDR
IC216	6-706-007-01	s	IC HY57V561620CTP-HDR
IC217	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC218	8-759-497-44	s	IC TC7WH125FU(TE12R)
IC300	6-701-025-01	s	IC SN74LVC16244ADGGR
IC301	6-701-025-01	s	IC SN74LVC16244ADGGR
IC304	6-700-421-01	s	IC SN74LVCH16245ADGGR
IC305	6-700-421-01	s	IC SN74LVCH16245ADGGR
IC306	6-700-421-01	s	IC SN74LVCH16245ADGGR
IC307	6-700-421-01	s	IC SN74LVCH16245ADGGR
IC309	6-704-988-01	s	IC FM18L08-70-STR
IC400	6-806-321-01	s	IC LC4032V-SY322
IC402	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC404	6-701-025-01	s	IC SN74LVC16244ADGGR
IC405	6-707-881-01	s	IC TC74VHC574FT(EKJ)
IC406	6-707-881-01	s	IC TC74VHC574FT(EKJ)
IC407	6-707-881-01	s	IC TC74VHC574FT(EKJ)
IC408	6-707-881-01	s	IC TC74VHC574FT(EKJ)
IC409	6-707-881-01	s	IC TC74VHC574FT(EKJ)
IC410	6-706-484-01	s	IC TC7SH04FU(T5RSOYJF)
IC500	6-702-076-01	s	IC TSB43AB22APDT

(SY-322 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
L100	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L101	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L200	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L201	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L202	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L203	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
Q400	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q401	8-729-928-82	s	TRANSISTOR DTC144EE-TL
R200	1-208-911-81	s	RES, CHIP 10K (1005)
R201	1-208-911-81	s	RES, CHIP 10K (1005)
R202	1-208-911-81	s	RES, CHIP 10K (1005)
R203	1-208-911-81	s	RES, CHIP 10K (1005)
R204	1-208-911-81	s	RES, CHIP 10K (1005)
R205	1-208-911-81	s	RES, CHIP 10K (1005)
R206	1-208-911-81	s	RES, CHIP 10K (1005)
R207	1-208-911-81	s	RES, CHIP 10K (1005)
R208	1-208-911-81	s	RES, CHIP 10K (1005)
R209	1-208-911-81	s	RES, CHIP 10K (1005)
R210	1-208-911-81	s	RES, CHIP 10K (1005)
R211	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R212	1-208-911-81	s	RES, CHIP 10K (1005)
R213	1-208-911-81	s	RES, CHIP 10K (1005)
R214	1-220-878-81	s	RES, CHIP 22 (1005)
R215	1-208-911-81	s	RES, CHIP 10K (1005)
R216	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R218	1-208-887-81	s	RES, CHIP 1.0K (1005)
R219	1-208-927-81	s	RES, CHIP 47K (1005)
R220	1-208-927-81	s	RES, CHIP 47K (1005)
R221	1-208-887-81	s	RES, CHIP 1.0K (1005)
R222	1-208-927-81	s	RES, CHIP 47K (1005)
R223	1-208-927-81	s	RES, CHIP 47K (1005)
R224	1-208-927-81	s	RES, CHIP 47K (1005)
R225	1-208-935-81	s	RES, CHIP 100K (1005)
R226	1-208-911-81	s	RES, CHIP 10K (1005)
R227	1-208-935-81	s	RES, CHIP 100K (1005)
R228	1-208-911-81	s	RES, CHIP 10K (1005)
R229	1-208-911-81	s	RES, CHIP 10K (1005)
R230	1-208-911-81	s	RES, CHIP 10K (1005)
R231	1-208-935-81	s	RES, CHIP 100K (1005)
R232	1-208-911-81	s	RES, CHIP 10K (1005)
R233	1-208-911-81	s	RES, CHIP 10K (1005)
R234	1-208-935-81	s	RES, CHIP 100K (1005)
R240	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R241	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R242	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R243	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R244	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R245	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R246	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R247	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R248	1-208-911-81	s	RES, CHIP 10K (1005)
R249	1-220-878-81	s	RES, CHIP 22 (1005)
R250	1-220-878-81	s	RES, CHIP 22 (1005)
R251	1-220-878-81	s	RES, CHIP 22 (1005)
R252	1-220-878-81	s	RES, CHIP 22 (1005)
R254	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R255	1-208-959-81	s	RES, CHIP 1M (1005)
R256	1-208-895-81	s	RES, CHIP 2.2K (1005)

(SY-322 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R257	1-208-911-81	s	RES, CHIP 10K (1005)
R258	1-208-911-81	s	RES, CHIP 10K (1005)
R259	1-208-911-81	s	RES, CHIP 10K (1005)
R260	1-208-911-81	s	RES, CHIP 10K (1005)
R261	1-208-911-81	s	RES, CHIP 10K (1005)
R262	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R263	1-208-927-81	s	RES, CHIP 47K (1005)
R264	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R265	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R266	1-208-911-81	s	RES, CHIP 10K (1005)
R267	1-208-927-81	s	RES, CHIP 47K (1005)
R268	1-208-927-81	s	RES, CHIP 47K (1005)
R269	1-208-911-81	s	RES, CHIP 10K (1005)
R270	1-208-935-81	s	RES, CHIP 100K (1005)
R271	1-208-935-81	s	RES, CHIP 100K (1005)
R272	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R273	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R274	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R275	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R276	1-208-911-81	s	RES, CHIP 10K (1005)
R277	1-208-911-81	s	RES, CHIP 10K (1005)
R278	1-208-911-81	s	RES, CHIP 10K (1005)
R279	1-208-911-81	s	RES, CHIP 10K (1005)
R280	1-208-911-81	s	RES, CHIP 10K (1005)
R281	1-208-911-81	s	RES, CHIP 10K (1005)
R282	1-208-911-81	s	RES, CHIP 10K (1005)
R283	1-208-911-81	s	RES, CHIP 10K (1005)
R284	1-208-911-81	s	RES, CHIP 10K (1005)
R285	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R286	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R287	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R288	1-208-927-81	s	RES, CHIP 47K (1005)
R290	1-208-875-81	s	RES, CHIP 330 (1005)
R291	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R292	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R302	1-208-935-81	s	RES, CHIP 100K (1005)
R304	1-208-911-81	s	RES, CHIP 10K (1005)
R305	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R306	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R308	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R309	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R400	1-208-911-81	s	RES, CHIP 10K (1005)
R401	1-208-911-81	s	RES, CHIP 10K (1005)
R402	1-220-878-81	s	RES, CHIP 22 (1005)
R403	1-208-911-81	s	RES, CHIP 10K (1005)
R406	1-220-878-81	s	RES, CHIP 22 (1005)
R407	1-208-911-81	s	RES, CHIP 10K (1005)
R408	1-208-911-81	s	RES, CHIP 10K (1005)
R410	1-208-911-81	s	RES, CHIP 10K (1005)
R411	1-208-935-81	s	RES, CHIP 100K (1005)
R412	1-208-935-81	s	RES, CHIP 100K (1005)
R413	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R415	1-208-935-81	s	RES, CHIP 100K (1005)
R416	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R417	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R424	1-208-935-81	s	RES, CHIP 100K (1005)
R425	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R426	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R427	1-208-935-81	s	RES, CHIP 100K (1005)

(SY-322 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R428	1-208-935-81	s	RES, CHIP 100K (1005)
R429	1-208-911-81	s	RES, CHIP 10K (1005)
R430	1-208-911-81	s	RES, CHIP 10K (1005)
R431	1-208-911-81	s	RES, CHIP 10K (1005)
R433	1-208-887-81	s	RES, CHIP 1.0K (1005)
R435	1-208-911-81	s	RES, CHIP 10K (1005)
R436	1-208-935-81	s	RES, CHIP 100K (1005)
R437	1-208-935-81	s	RES, CHIP 100K (1005)
R438	1-208-935-81	s	RES, CHIP 100K (1005)
R439	1-208-887-81	s	RES, CHIP 1.0K (1005)
R440	1-208-887-81	s	RES, CHIP 1.0K (1005)
R441	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R442	1-220-878-81	s	RES, CHIP 22 (1005)
R443	1-220-878-81	s	RES, CHIP 22 (1005)
R444	1-220-878-81	s	RES, CHIP 22 (1005)
R445	1-220-878-81	s	RES, CHIP 22 (1005)
R446	1-220-878-81	s	RES, CHIP 22 (1005)
R447	1-220-878-81	s	RES, CHIP 22 (1005)
R448	1-220-878-81	s	RES, CHIP 22 (1005)
R449	1-220-878-81	s	RES, CHIP 22 (1005)
R450	1-220-878-81	s	RES, CHIP 22 (1005)
R451	1-208-911-81	s	RES, CHIP 10K (1005)
R452	1-208-911-81	s	RES, CHIP 10K (1005)
R454	1-208-911-81	s	RES, CHIP 10K (1005)
R455	1-208-911-81	s	RES, CHIP 10K (1005)
R456	1-220-878-81	s	RES, CHIP 22 (1005)
R457	1-220-878-81	s	RES, CHIP 22 (1005)
R458	1-220-878-81	s	RES, CHIP 22 (1005)
R462	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R463	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R464	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R465	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R466	1-208-935-81	s	RES, CHIP 100K (1005)
R467	1-208-935-81	s	RES, CHIP 100K (1005)
R468	1-208-935-81	s	RES, CHIP 100K (1005)
R469	1-208-935-81	s	RES, CHIP 100K (1005)
R500	1-208-935-81	s	RES, CHIP 100K (1005)
R501	1-208-935-81	s	RES, CHIP 100K (1005)
R502	1-208-959-81	s	RES, CHIP 1M (1005)
R503	1-208-935-81	s	RES, CHIP 100K (1005)
R504	1-208-935-81	s	RES, CHIP 100K (1005)
R505	1-208-911-81	s	RES, CHIP 10K (1005)
R506	1-208-911-81	s	RES, CHIP 10K (1005)
R507	1-208-911-81	s	RES, CHIP 10K (1005)
R508	1-208-911-81	s	RES, CHIP 10K (1005)
R509	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R510	1-208-911-81	s	RES, CHIP 10K (1005)
R511	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R512	1-208-863-81	s	RES, CHIP 100 (1005)
R513	1-208-935-81	s	RES, CHIP 100K (1005)
R514	1-208-907-81	s	RES, CHIP 6.8K (1005)
R516	1-208-857-81	s	RES, CHIP 56 (1005)
R517	1-208-857-81	s	RES, CHIP 56 (1005)
R518	1-208-857-81	s	RES, CHIP 56 (1005)
R519	1-208-857-81	s	RES, CHIP 56 (1005)
R520	1-208-911-81	s	RES, CHIP 10K (1005)
R521	1-208-911-81	s	RES, CHIP 10K (1005)
R522	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R523	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(SY-322 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R524	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R525	1-208-911-81	s	RES, CHIP 10K (1005)
R526	1-208-871-81	s	RES, CHIP 220 (1005)
R527	1-208-871-81	s	RES, CHIP 220 (1005)
R528	1-208-871-81	s	RES, CHIP 220 (1005)
R529	1-208-871-81	s	RES, CHIP 220 (1005)
R530	1-208-911-81	s	RES, CHIP 10K (1005)
R531	1-208-911-81	s	RES, CHIP 10K (1005)
R532	1-218-990-81	s	CONDUCTOR, CHIP (1005)
RB200	1-234-377-21	s	RES, NETWORK 4.7K (1005X4)
RB201	1-234-377-21	s	RES, NETWORK 4.7K (1005X4)
RB202	1-234-377-21	s	RES, NETWORK 4.7K (1005X4)
RB203	1-234-377-21	s	RES, NETWORK 4.7K (1005X4)
RB204	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB400	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB401	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB402	1-234-381-21	s	RES, NETWORK 100K (1005X4)
S200	1-771-721-21	s	SWITCH, TACTILE
S201	1-771-721-21	s	SWITCH, TACTILE
S203	1-771-709-41	s	SWITCH, SLIDE
S400	1-692-881-41	s	SWITCH, SLIDE
S401	1-692-270-41	s	SWITCH, SLIDE
X200	1-813-059-11	s	VIBRATOR, CRYSTAL (4.194304 MHz)
X201	1-813-063-11	s	VIBRATOR, CRYSTAL (18.432 MHz)
X500	1-795-796-11	s	VIBRATOR, CRYSTAL (24.576 MHz)

TC-110 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1164-295-A	s	MOUNTED CIRCUIT BOARD, TC-110
1pc	1-569-619-11	o	HOUSING, CONNECTOR 4P
1pc	1-569-682-11	o	HOUSING, CONNECTOR 4P
S1	1-570-610-11	s	SWITCH, TOGGLE

TG-249 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1164-306-A	s	MOUNTED CIRCUIT BOARD, TG-249
C1	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2	1-165-872-21	s	CAP, ELECT 47MF (5.0X6.5)
C3	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C4	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C5	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C6	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C7	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C8	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3225
C9	1-100-672-91	s	CAP, CERAMIC 10MF C (3216)
C11	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C12	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C13	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C14	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C15	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C16	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C17	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C18	1-135-646-91	s	CAP, CHIP FILM 1MF
C19	1-127-956-21	s	CAP, CHIP FILM 0.1MF (3225)
C20	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C21	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C22	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C23	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C24	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C25	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C26	1-165-872-21	s	CAP, ELECT 47MF (5.0X6.5)
C27	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C28	1-127-956-21	s	CAP, CHIP FILM 0.1MF (3225)
C29	1-127-956-21	s	CAP, CHIP FILM 0.1MF (3225)
C31	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C32	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C33	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C35	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C37	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C39	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C40	1-127-956-21	s	CAP, CHIP FILM 0.1MF (3225)
C41	1-127-956-21	s	CAP, CHIP FILM 0.1MF (3225)
C42	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C43	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C44	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C45	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C46	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C47	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C48	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C49	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C53	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C54	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C55	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C56	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C57	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C58	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C59	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C60	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C61	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C64	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C69	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C70	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C71	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(TG-249 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C72	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C73	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C74	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C75	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C76	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C79	1-107-418-21	s	CAP, CHIP ELECT 10MF
C80	1-165-629-91	s	CAP, CERAMIC 1000000PF B(3225)
C81	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C82	1-165-629-91	s	CAP, CERAMIC 1000000PF B(3225)
C83	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C85	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C86	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C87	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C88	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C89	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C90	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C91	1-165-629-91	s	CAP, CERAMIC 1000000PF B(3225)
C92	1-126-398-21	s	CAP, CHIP ELECT 4.7MF (4X5.7)
C93	1-165-629-91	s	CAP, CERAMIC 1000000PF B(3225)
C94	1-126-398-21	s	CAP, CHIP ELECT 4.7MF (4X5.7)
C95	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C96	1-165-629-91	s	CAP, CERAMIC 1000000PF B(3225)
C97	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C98	1-126-398-21	s	CAP, CHIP ELECT 4.7MF (4X5.7)
C99	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C100	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C101	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C102	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C103	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C104	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C105	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C106	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C107	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C108	1-137-897-21	s	CAP, ELECT 150MF (6.3X6)
CN1	1-778-534-31	s	CONNECTOR, FFC/FPC(ZIF) ST 45P
CN3	1-778-451-31	s	CONNECTOR, FFC/FPC(ZIF) AN 50P
CN4	1-778-451-31	s	CONNECTOR, FFC/FPC(ZIF) AN 50P
CN5	1-779-268-21	o	PIN, CONNECTOR (1.5MM)(SMD)11P
D1	8-719-069-28	s	DIODE 1SS400TE-61
D2	8-719-069-28	s	DIODE 1SS400TE-61
D3	8-719-069-28	s	DIODE 1SS400TE-61
D4	8-719-069-28	s	DIODE 1SS400TE-61
D5	8-719-069-28	s	DIODE 1SS400TE-61
D6	8-719-069-28	s	DIODE 1SS400TE-61
D7	8-719-069-28	s	DIODE 1SS400TE-61
E1	1-535-877-22	s	CHIP, CHECKER
E2	1-535-877-22	s	CHIP, CHECKER
IC1	8-759-672-76	s	IC AK9813BF-E2
IC2	6-706-357-01	s	IC LTC1664IGN#TR
IC3	6-700-931-01	s	IC UPD16510GR-8JG-E1
IC4	6-704-976-01	s	IC ADR381ARTZ-REEL7
IC5	8-759-669-72	s	IC TL064CPWR
IC6	6-700-931-01	s	IC UPD16510GR-8JG-E1
IC7	8-759-327-01	s	IC NJM062V(TE2)
IC8	8-759-327-01	s	IC NJM062V(TE2)
IC9	6-700-931-01	s	IC UPD16510GR-8JG-E1
IC10	8-759-327-01	s	IC NJM062V(TE2)

(TG-249 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC14	8-759-488-34	s	IC TLV2221CDBV
IC15	6-704-723-01	s	IC XCS20XL-4VQG100C
IC17	8-759-679-57	s	IC SN74LVC00APWR
IC19	6-706-482-01	s	IC TC7SH00FU(T5RSOYJF)
IC20	6-706-481-01	s	IC TC7SET32FU(T5RSOJF)
IC21	6-706-481-01	s	IC TC7SET32FU(T5RSOJF)
IC23	8-759-669-41	s	IC SN74LVC125APWR-12
IC26	8-759-639-85	s	IC SN65LVDS31DR
IC27	8-759-557-85	s	IC NC7SZ32P5X
IC28	8-759-557-85	s	IC NC7SZ32P5X
IC29	8-759-557-85	s	IC NC7SZ32P5X
IC30	8-759-557-85	s	IC NC7SZ32P5X
L1	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L2	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L4	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L5	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L6	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
Q1	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q2	8-729-209-73	s	TRANSISTOR 2SA1213Y-TE12L
Q3	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q4	8-729-209-73	s	TRANSISTOR 2SA1213Y-TE12L
Q6	8-729-209-73	s	TRANSISTOR 2SA1213Y-TE12L
Q8	8-729-209-73	s	TRANSISTOR 2SA1213Y-TE12L
Q9	8-729-209-73	s	TRANSISTOR 2SA1213Y-TE12L
Q10	8-729-044-07	f	TRANSISTOR SI3443DV-T1
Q11	8-729-044-07	f	TRANSISTOR SI3443DV-T1
Q16	8-729-142-21	s	TRANSISTOR 2SB1115A-T1YQYP
Q17	6-551-266-01	s	TRANSISTOR SI2304BDS-T1
Q18	8-729-142-21	s	TRANSISTOR 2SB1115A-T1YQYP
Q19	6-551-266-01	s	TRANSISTOR SI2304BDS-T1
Q21	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
R2	1-208-863-81	s	RES, CHIP 100 (1005)
R3	1-208-863-81	s	RES, CHIP 100 (1005)
R6	1-220-870-81	s	RES, CHIP 10 (1005)
R7	1-220-870-81	s	RES, CHIP 10 (1005)
R8	1-220-870-81	s	RES, CHIP 10 (1005)
R9	1-220-870-81	s	RES, CHIP 10 (1005)
R10	1-208-903-81	s	RES, CHIP 4.7K (1005)
R11	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R12	1-208-915-81	s	RES, CHIP 15K (1005)
R13	1-208-887-81	s	RES, CHIP 1.0K (1005)
R14	1-208-919-81	s	RES, CHIP 22K (1005)
R15	1-208-919-81	s	RES, CHIP 22K (1005)
R16	1-208-919-81	s	RES, CHIP 22K (1005)
R17	1-208-895-81	s	RES, CHIP 2.2K (1005)
R18	1-208-899-81	s	RES, CHIP 3.3K (1005)
R19	1-208-903-81	s	RES, CHIP 4.7K (1005)
R20	1-208-915-81	s	RES, CHIP 15K (1005)
R21	1-208-887-81	s	RES, CHIP 1.0K (1005)
R22	1-220-870-81	s	RES, CHIP 10 (1005)
R23	1-220-870-81	s	RES, CHIP 10 (1005)
R24	1-220-870-81	s	RES, CHIP 10 (1005)
R25	1-220-870-81	s	RES, CHIP 10 (1005)
R26	1-208-899-81	s	RES, CHIP 3.3K (1005)
R27	1-208-903-81	s	RES, CHIP 4.7K (1005)
R28	1-208-915-81	s	RES, CHIP 15K (1005)
R29	1-208-899-81	s	RES, CHIP 3.3K (1005)
R30	1-208-927-81	s	RES, CHIP 47K (1005)

(TG-249 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R31	1-208-911-81	s	RES, CHIP 10K (1005)
R32	1-208-903-81	s	RES, CHIP 4.7K (1005)
R33	1-208-899-81	s	RES, CHIP 3.3K (1005)
R34	1-208-863-81	s	RES, CHIP 100 (1005)
R35	1-208-879-81	s	RES, CHIP 470 (1005)
R36	1-208-911-81	s	RES, CHIP 10K (1005)
R39	1-208-915-81	s	RES, CHIP 15K (1005)
R40	1-208-911-81	s	RES, CHIP 10K (1005)
R41	1-208-887-81	s	RES, CHIP 1.0K (1005)
R42	1-208-863-81	s	RES, CHIP 100 (1005)
R46	1-208-903-81	s	RES, CHIP 4.7K (1005)
R47	1-208-903-81	s	RES, CHIP 4.7K (1005)
R48	1-208-899-81	s	RES, CHIP 3.3K (1005)
R49	1-208-911-81	s	RES, CHIP 10K (1005)
R50	1-220-870-81	s	RES, CHIP 10 (1005)
R51	1-220-870-81	s	RES, CHIP 10 (1005)
R52	1-220-870-81	s	RES, CHIP 10 (1005)
R53	1-220-870-81	s	RES, CHIP 10 (1005)
R54	1-208-887-81	s	RES, CHIP 1.0K (1005)
R55	1-208-887-81	s	RES, CHIP 1.0K (1005)
R57	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R70	1-208-855-81	s	RES, CHIP 47 (1005)
R71	1-208-855-81	s	RES, CHIP 47 (1005)
R72	1-208-855-81	s	RES, CHIP 47 (1005)
R81	1-220-870-81	s	RES, CHIP 10 (1005)
R82	1-208-903-81	s	RES, CHIP 4.7K (1005)
R83	1-208-911-81	s	RES, CHIP 10K (1005)
R86	1-208-879-81	s	RES, CHIP 470 (1005)
R88	1-220-878-81	s	RES, CHIP 22 (1005)
R90	1-220-878-81	s	RES, CHIP 22 (1005)
R91	1-220-878-81	s	RES, CHIP 22 (1005)
R92	1-220-878-81	s	RES, CHIP 22 (1005)
R93	1-208-887-81	s	RES, CHIP 1.0K (1005)
R94	1-220-878-81	s	RES, CHIP 22 (1005)
R95	1-220-878-81	s	RES, CHIP 22 (1005)
R97	1-208-855-81	s	RES, CHIP 47 (1005)
R98	1-208-855-81	s	RES, CHIP 47 (1005)
R100	1-220-878-81	s	RES, CHIP 22 (1005)
R101	1-220-878-81	s	RES, CHIP 22 (1005)
R104	1-208-855-81	s	RES, CHIP 47 (1005)
R105	1-208-911-81	s	RES, CHIP 10K (1005)
R106	1-208-911-81	s	RES, CHIP 10K (1005)
R107	1-208-895-81	s	RES, CHIP 2.2K (1005)
R108	1-208-895-81	s	RES, CHIP 2.2K (1005)
R109	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R110	1-220-874-81	s	RES, CHIP 15 (1005)
R111	1-220-874-81	s	RES, CHIP 15 (1005)
R112	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R113	1-220-874-81	s	RES, CHIP 15 (1005)
R114	1-220-874-81	s	RES, CHIP 15 (1005)
R122	1-208-923-81	s	RES, CHIP 33K (1005)
R123	1-208-959-81	s	RES, CHIP 1M (1005)
R124	1-208-923-81	s	RES, CHIP 33K (1005)
R125	1-208-959-81	s	RES, CHIP 1M (1005)
R126	1-208-923-81	s	RES, CHIP 33K (1005)
R127	1-208-959-81	s	RES, CHIP 1M (1005)
R130	1-208-911-81	s	RES, CHIP 10K (1005)
R142	1-208-863-81	s	RES, CHIP 100 (1005)
R143	1-208-863-81	s	RES, CHIP 100 (1005)

(TG-249 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R144	1-208-863-81	s	RES, CHIP 100 (1005)
R148	1-208-855-81	s	RES, CHIP 47 (1005)
R149	1-208-911-81	s	RES, CHIP 10K (1005)
R150	1-208-911-81	s	RES, CHIP 10K (1005)
R152	1-208-879-81	s	RES, CHIP 470 (1005)
R153	1-208-855-81	s	RES, CHIP 47 (1005)
RB1	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB2	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB3	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB4	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB5	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB6	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB7	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB8	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB9	1-234-377-21	s	RES, NETWORK 4.7K (1005X4)
X1	1-813-318-12	s	OSCILLATOR, CRYSTAL
X2	1-813-317-12	s	OSCILLATOR, CRYSTAL

VF-76 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1144-555-A	s	MOUNTED CIRCUIT BOARD, VF-76
CP1	1-576-805-11	s	FUSE (SMD/FAST ACTING) (0.4A/250V)
R26	1-216-823-11	s	RES, CHIP 1.5K (1608)
R27	1-216-823-11	s	RES, CHIP 1.5K (1608)
R36	1-218-878-11	s	RES, CHIP 20K (1608)
R37	1-218-858-91	s	RES, CHIP 3.0K (1608)
R41	1-216-835-91	s	RES, CHIP 15K (1608)
R42	1-216-835-91	s	RES, CHIP 15K (1608)
RV1	1-225-792-31	s	RES, ADJ, CERMET 10K

VF-87 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1164-292-A	s	MOUNTED CIRCUIT BOARD, VF-87
C3	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C10	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C11	1-162-915-91	s	CAP, CERAMIC 10PF CH 1608
C12	1-162-964-91	s	CAP,CHIP CERAMIC 1000PF B 1608
C13	1-107-826-91	s	CAP, CHIP CERAMIC 100000PF B
C14	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C15	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C16	1-127-573-91	s	CAP, CHIP CERAMIC 1MF B (2012)
C17	1-127-573-91	s	CAP, CHIP CERAMIC 1MF B (2012)
C18	1-100-672-91	s	CAP, CERAMIC 10MF C (3216)
C19	1-100-672-91	s	CAP, CERAMIC 10MF C (3216)
CN1	1-778-650-31	s	CONNECTOR, FFC/FPC(ZIF) ST 30P
CN2	1-573-290-21	s	PIN, CONNECTOR (1.5MM) (SMD)4P
CN3	1-691-550-21	s	PIN, CONNECTOR (1.5MM)(SMD) 3P
CN5	1-565-249-11	o	SOCKET, CONNECTOR
CN6	1-764-250-21	o	PIN, CONNECTOR (PC BOARD) 4P
CN7	1-764-250-21	o	PIN, CONNECTOR (PC BOARD) 4P
FL1	1-239-898-22	s	FILTER, EMI (SMD)
FL2	1-239-898-22	s	FILTER, EMI (SMD)
FL3	1-239-898-22	s	FILTER, EMI (SMD)
IC1	6-702-481-01	s	IC PCA9555DB-118
IC2	8-759-662-39	s	IC 74VHCT245AMTCX
L2	1-414-170-41	s	INDUCTOR, CHIP 100UH
L3	1-414-170-41	s	INDUCTOR, CHIP 100UH
Q8	8-729-140-64	s	TRANSISTOR 2SA1611T1-M5M6
R1	1-208-935-81	s	RES, CHIP 100K (1005)
R17	1-208-863-81	s	RES, CHIP 100 (1005)
R18	1-218-977-81	s	RES, CHIP 100K
R19	1-208-863-81	s	RES, CHIP 100 (1005)
R28	1-218-965-81	s	RES, CHIP 10K
R31	1-208-911-81	s	RES, CHIP 10K (1005)
R32	1-208-911-81	s	RES, CHIP 10K (1005)
RB1	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB2	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB3	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB4	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB5	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB6	1-234-372-21	s	RES, NETWORK 100 (1005X4)

```
------------
VIO-36 BOARD
------------
 Ref. No.
 or Q'ty  Part No.    SP Description

 1pc      A-1164-293-A s MOUNTED CIRCUIT BOARD, VIO-36
 1pc      1-569-520-11 o HOUSING, CONNECTOR 10P
 1pc      3-796-990-01 s CUSION DROP PROTECTION

 CN2      1-766-381-11 s CONNECTOR, COAXIAL (BNC TYPE)
 CN3      1-766-381-11 s CONNECTOR, COAXIAL (BNC TYPE)
 CN4      1-766-381-11 s CONNECTOR, COAXIAL (BNC TYPE)
 CN5      1-766-381-11 s CONNECTOR, COAXIAL (BNC TYPE)

 R1       1-216-864-91 s CONDUCTOR, CHIP (1608)
 R2       1-216-864-91 s CONDUCTOR, CHIP (1608)
 R3       1-216-864-91 s CONDUCTOR, CHIP (1608)
 R4       1-216-864-91 s CONDUCTOR, CHIP (1608)
 R5       1-216-864-91 s CONDUCTOR, CHIP (1608)

 R7       1-216-864-91 s CONDUCTOR, CHIP (1608)
```

```
-------------
VIO-36A BOARD
-------------
 Ref. No.
 or Q'ty  Part No.    SP Description

 1pc      A-1164-291-A s MOUNTED CIRCUIT BOARD, VIO-36A
 1pc      1-569-520-11 o HOUSING, CONNECTOR 10P
 1pc      3-796-990-01 s CUSION DROP PROTECTION

 CN2      1-766-381-11 s CONNECTOR, COAXIAL (BNC TYPE)
 CN3      1-766-381-11 s CONNECTOR, COAXIAL (BNC TYPE)
 CN4      1-766-381-11 s CONNECTOR, COAXIAL (BNC TYPE)
 CN5      1-766-381-11 s CONNECTOR, COAXIAL (BNC TYPE)

 R1       1-216-864-91 s CONDUCTOR, CHIP (1608)
 R2       1-216-864-91 s CONDUCTOR, CHIP (1608)
 R3       1-216-864-91 s CONDUCTOR, CHIP (1608)
 R4       1-216-864-91 s CONDUCTOR, CHIP (1608)
 R6       1-216-864-91 s CONDUCTOR, CHIP (1608)

 R8       1-216-864-91 s CONDUCTOR, CHIP (1608)
```

```
------------
VR-312 BOARD
------------
 Ref. No.
 or Q'ty  Part No.    SP Description

 1pc      A-1164-303-A s MOUNTED CIRCUIT BOARD, VR-312

 RV1      1-223-686-11 s RES, VAR, CARBON 5K/5K

 S1       1-762-124-11 s SWITCH, TOGGLE
 S2       1-762-531-11 s SWITCH, TOGGLE
 S3       1-570-995-11 s SWITCH, KEY BOARD
```

1-4. Supplied Accessories

```
-------------------
SUPPLIED ACCESSORIES
-------------------
 Ref. No.
 or Q'ty  Part No.    SP Description

 1pc      A-1169-603-A s MICROPHONE ASSY
 1pc      A-6772-374-C s BELT ASSY, SHOULDER
 1pc      A-8274-968-B s KIT, ACCESSORY-SHOE
 1pc      A-8278-057-B s BRACKET ASSY(WRR)
 1pc      1-479-570-11 s REMOTE COMMANDER (RM-F300)

 1pc      1-528-174-31 s BATTERY, LITHIUM (CR2032 TYPE)
 1pc      3-764-889-01 o CHART, ADJUSTMENT
 1pc      3-990-970-01 s OPERATING INSTRUCTIONS
 1pc      3-990-970-11 s OPERATING INSTRUCTIONS
 1pc      3-991-419-01 s WIND SCREEN

 1pc      3-991-435-01 s PACK,CD-ROM
 1pc      3-991-924-02 s CD-ROM(PDZ-1)
```

1-5. Optional Fixtures

```
Part No.    SP Description

A-1191-309-A s EXTENSION ASSY, CHB/DCP
A-1199-179-A s PLD DOWNLOAD TOOL DIF-176
A-8327-453-A o MOUNTED C. BOARD EX-784
A-8327-454 A o MOUNTED C. BOARD EX-785
J-6026-110-A o BURST CHART
J-6026-130-B o GRAY SCALE CHART
J-6394-080-A o GRAY SCALE CHART (16:9)
J-6029-140-B o PATTERN BOX
J-6323-530-A o STOP WASHER FASTENING TOOL
J-6570-010-A o TRIANGLE PLATE IN/OUT(BRD-P1)
J-6570-030-1 o BRD-P1/P2 REFLECTION BLOCK
J-6570-040-1 o PROOF PLATE
J-6570-050-A o RD ADJUSTMENT SCREWDRIVER
J-6570-060-A o KES-110A E&F LPF BOX
J-6570-110-A o ALIGNMENT DISC
J-6325-110-A o BIT FOR TORQUE DRIVER (M1.4)
J-6325-380-A o BIT FOR TORQUE DRIVER (M2)
J-6323-430-A o TORQUE SCREWDRIVERÅfS BIT (M3)
J-6325-400-A o TORQUE DRIVER (3KG)
J-6252-510-A o TORQUE DRIVER 6KG-CM
J-6252-520-A o TORQUE DRIVER 12KG-CM
1-831-602-11 s CABLE, FLEXIBLE FLAT (50 CORE, 260mm)
3-184-527-01 s CLOTH, CLEANING (150MMX150MM)
3-703-358-08 s PIN,PARALLEL (2X20)(STEEL)
7-432-114-11 s THREE BOND-1401B
7-640-010-89 s LUBRICANT (LX-206) 100G
7-700-736-04 s L-SHAPED HEX. WRENCH (2.5MM)
7-700-736-05 s L-SHAPED HEX. WRENCH (1.5MM)
7-700-736-06 s L-SHAPED HEX. WRENCH (0.89MM)
9-919-573-01 s HEAD CLEANING LIQUID
```

Section 2
Semiconductor Pin Assignments

The following describes the semiconductor types used in this unit.
For semiconductors marked with page numbers in the index, refer to the corresponding pages in this section. However, in some cases incompatible types are also listed, therefore, when a part is to be replaced, also refer to the Spare Parts section.
In addition, for semiconductors with ID Nos., refer to the separate CD-ROM titled “Semiconductor Pin Assignments” (Sony Part No. 9-968-546-xx) that allows searching for parts by semiconductor type or ID No.
The semiconductors in the manual or on the CD-ROM are listed by equivalent types. Thus the external view or the index mark indication may differ from the actual type.
Pin assignments and block diagrams are based on the IC manufacturer’s data book.

本機に使用されている半導体型名の一覧を下記に示します。
索引中，ページが記載されている半導体は，本章の該当ページを参照してください。ただし，互換性のない型名を併記している場合がありますので，部品を交換するときは，Spare Partsの章を参照してください。
また，ID番号が記載されている半導体は，別途発行の “Semiconductor Pin Assignments” CD−ROM版 (ソニー部品番号：9−968−546−xx)を参照してください。
半導体型名またはID番号から検索ができます。
マニュアルまたはCD−ROMに掲載されている半導体は，それぞれの機能を等価的に表わしたものです。
外観やインデックスマークの表示方法が実物と異なる場合があります。
ピン配置およびブロック図はICメーカーのデータブックに従いました。

DIODE — **Page or ID No.**

02DZ6.8-TPH3 ..... DC008-04

1SS300-TE85L DC001-02
1SS301-TE85L DC001-03
1SS302-TE85L DC001-01
1SS362-TE85L DC001-01

DAP222-TL DC001-02

M2FM3 ..... DC008-02
MA132WA-TX DC001-02
MBR0530T1 ..... DC008-02

NSAD500H-T1-A DC014-04

RB050L-40TE25 ..... DC007-01
RB051L-40TE25 ..... DC007-01
RB160L-40TE25 ..... DC007-01
RD12SB3-T1 ..... DC008-04
RD20SB-T1 ..... DC008-04

LED — **Page or ID No.**

CL-196HR-CD-T LC001-01
CL-196YG-CD-T LC001-01

TRANSISTOR — **Page or ID No.**

2SA1213Y-TE12L TC002-01
2SA1611T1-M5M6 ..... TC001-01
2SC2713G-TE85L TC001-02
2SC4213-AB-TE85L TC001-02
2SK2315TYTR TC002-08
2SK3018-T106 ..... TC001-07
2SK711-BL(TE85L) TC001-05

TRANSISTOR — **Page or ID No.**

DTA123JE-TL TC001-04
DTA144EE-TL TC001-04
DTC114TE-TL TC001-18
DTC123JE-TL TC001-03
DTC144EE-TL TC001-03

FDS6690A TC013-06
FDS6690S TC013-06

HAT2164H-EL-E TC017-01
HN1B01FU-TE85R TC006-17

NDS355AN TC001-07
NDS356AP TC001-20

SI3443DV-T1 ..... TC005-17
SI4431DY-T1 ..... TC012-04
SI4466DY-T1 ..... TC012-06
SI9407AEY-T1 ..... TC012-04

IC — **Page or ID No.**

74LCX16245MTDX IDT74FCT16245ATPV-TR
74LCX74MTCX TC74HC74P
74VHC4053MTCX MC74HC4053F
74VHCT245AMTCX TC74HC245P

AD5424YCPZ-REEL7 ..... AD5424YCPZ-REEL7
ADXL202JE-REEL ADXL202JE-REEL
AK4382AVT-E2 ..... AK4382AVT-E2
AK5383VF-E2 ..... AK5392-VS-E2
AK6420AM(E2) AK6420AM-E2
AK6420AM AK6420AM-E2
AK6420AM-E2 ..... AK6420AM-E2
AK6510CM-E2 ..... AK6510CM-E2
AK6512CM-E2 ..... AK6512CM-E2

Index

IC	Page or ID No.
AK9813BF-E2	MB88E346PFV-G-BND-ER
AM26C31CDBR	DS26C31CM
BD6671FM	BD6671FM
CAT24WC256XI-TE13	CAT24WC256XI-TE13
CDCVF2505PWR	CDCVF2505PWR
CXD1095BR	CXD1095AR
CXD9093R	CXD9093R
CXD9156GG-P	9-999-999-99
CXD9180GB	CXD9180GB
EPC2LC20N-TP	EPC2LC20
FM18L08-70-STR	FM1808-70-STR
HCPL-0630-500	MA009-01
HD6417709SF100BV	HD6417709SF133BV
HD64F7145F50	HD64F7145F50
HY57V561620CTP-HDR	HY57V561620BT-HDR
IDTQS3257Q-TL	SN74CBTLV3257PWR
K4S64323LH-HN75T	IS42S32200B-6TL-TR
LM45BIM3X	LM45BIM3X
LM45BIM3X/NOPB	LM45BIM3X
LT1764EQ-1.8-E2	LT1764EQ-E2
LT1764EQ-2.5-E2	LT1764EQ-E2
LT1764EQ-E2	LT1764EQ-E2
LT1963EQ-E2	LT1764EQ-E2
LTC1473CGN-E2	LTC1473CGN-E2
LTC1625CGN-E2	LTC1625CGN-E2
MB88347LPFV-ER	MB88347PFV-G-BND
NC7SZ00P5X	TC7S00F
NC7SZ02P5	TC4S01F
NC7SZ32P5X	TC7S32F
NJM062V(TE2)	RC4558
NJM062V(TE2)	RC4558
NJM2172V(TE2)	NJM2172V_TE2
NJM2903V(TE2)	UA393DC
NJM2904V(TE2)	RC4558
NJM319V(TE2)	UPC319C
NJM324V(TE2)	XRA10324AF
NJM4556AV(TE2)	RC4558
NJM4560M-D(TE2)	RC4558
NJM4580V(TE2)	RC4558
NJM78M05DL1A-TE1	NJM78M12DLA_TE1
NJU7062M(TE2)	RC4558
NJW4301M-TE2	NJW4301M-TE2
OPA2340EA/2K5-S	RC4558
PCA9555DB-118	PCA9555DB-118
PLL1705DBQR	PLL1705DBQR
QS3257Q	SN74CBTLV3257PWR
QS3257Q-T	SN74CBTLV3257PWR

IC	Page or ID No.
R3112N291A-TR-FA	S-80928ANMP-DDR-T2
S-80915CNNB-G8KT2G	S-80920CNNB-G8Q-T2
S-80928CNNB-G8YT2G	S-80920CNNB-G8Q-T2
S-812C30AUA-C2KT2G	S-81225AG-RH
S-812C33AUA-C2NT2G	S-81225AG-RH
SC1565IS-2.5.TR	SC1565IS-2_5_TR
SN65LVDS31DR	DS26C31CM
SN65LVDT2DBVR	SN65LVDT2DBVR
SN74AHC1G66HDCK3	SC14S66F
SN74CBTLV1G125DCKR	SN74CBT1G125DCKR
SN74CBTLV3257PWR	SN74CBTLV3257PWR
SN74LV245APWR	TC74HC245P
SN74LV4053APWR	MC74HC4053F
SN74LVC00APWR	TC74HC00P
SN74LVC04APWR	TC74HC04P
SN74LVC125APWR-12	MC74HC125N
SN74LVC138APWR-12	TC74HC138P
SN74LVC16244ADGGR	IDT74FCT16244ATPV
SN74LVC245APWR	TC74HC245P
SN74LVC541APWR	SN74LS541N
SN74LVC74APWR-12	TC74HC74P
SN74LVCH16245ADGGR	IDT74FCT16245ATPV-TR
SN74LVCH16374ADGGR	SN74ABT16374DL
SN75207BNSR	SN75207BN
TC4W53FU(TE12R)	TC4W53FU
TC74HC4052AFT(EL)	MC74HC4052N
TC74HC4053AFT(EL)	MC74HC4053F
TC74VHC14FT(EL)	TC74HC14P
TC74VHC165FT(EL)	TC74HC165P
TC7SZ04FU(TE85R)	TC7S04F
TC7SZ08FU(TE85R)	TC7S08F
TC7SZ125FU(TE85R)	NC7SZ125P5
TC7SZ32FU(TE85R)	TC7S32F
TC7W53FU(TE12R)	TC4W53FU
TC7WH04FU(TE12R)	TC7W04F
TC7WH08FU(TE12R)	TC7W08F
TC7WH123FU(TE12R)	TC7WH123FU_TE12R
TC7WH125FU(TE12R)	TC7W125FU
TC7WH14FK(TE85R)	TC7W14FU
TC7WH157FU(TE12R)	TC7WH157FU_TE12R
TC7WH74FU(TE12R)	TC7W74FU
TC7WZ04FK(TE85R)	TC7W04F
TL064CPWR	XRA10324AF
TL074CPWR-12	XRA10324AF
TL1451ACPWR-12	TL1451CNS
TL431CPK-E2	NJM431U
TLC2933IPWR-12	TLC2933IPWR
TLV2221CDBV	TA75S01F
TPS62050DGSR	TPS62050DGSR
UPC358G2-E2	RC4558
UPC4572G2-E2	RC4558
UPD16510GR-8JG-E1	UPD16510GR-8JG-E1
XCS20XL-4VQG100C	XCS20XL-4VQ100C

Section 3
Block Diagrams

Index

Board Name	Function	Page
Overall (Camera)	–	3-2
Overall (VDR)	–	3-3
Overall (Drive)	–	3-4
AA-112	CH-1/2 AUDIO IN connectors	3-5
AU-307 (PDW-F350)	AUDIO OUT (XLR 5P) connector	3-14
AU-307C (PDW-F350)	AUDIO OUT (XLR 3P) connector	3-14
CN-2624	iLINK connector	3-19
CN-2829	2/3 inch lens connector	3-11
CNB-18	Power source controller	3-6
DCP-37 (PDW-F350)	Camera video signal processor	3-7
DCP-37A (PDW-F330)	Camera video signal processor	3-7
DET-43G	LCD position detector	3-15
DIF-167	Auto focus/Angular rate sensor	3-11
DR-550G	Disk drive processor	3-12
DU-318	IR sensor	3-15
DU-398	Binary counter	3-13
DVP-29	VDR main processor	3-13
ENC-100	OSD control	3-15
FP-144 (PDW-F350)	Analog audio processor	3-14
FP-144A (PDW-F330)	Analog audio processor	3-14
GCN-17	OUTPUT/GAIN switch	3-15
HN-300G	Mecha sensor connection	3-12
HP-124	Earphone jack	3-14
IO-228 (PDW-F330)	TC IN/OUT, VIDEO OUT connector	3-17
IR-36	1/2 inch lens connector	3-11
JK-73 (PDW-F330)	CH-1/2 AUDIO OUT jack	3-14
KSW-51	Assignable switch	3-15
KY-573	Function key	3-15
LED-428	Tally switch	3-9
LGT-12	Light ON switch	3-17
MA-136	Camera MIC IN connector	3-5
MS-71	Memory stick	3-8
PA-328	CCD preamplifier	3-16
PA-329	CCD preamplifier	3-16
PA-330	CCD preamplifier	3-16
PD-115	LCD driver	3-17
PS-708	Double-Layer capacitor	3-6
PSW-85	Power switch	3-6
RE-236	DC-DC converter	3-18
RM-203	Remote connector	3-9
RX-96	Wireless receiver interface	3-14
SE-709	Loder position sensor	3-12
SE-743	Optical filter position sensor	3-9
SE-800	Accelation sensor	3-12
SW-1124G	Cartrige sensor switch	3-12
SW-1125G	Cartrige sensor switch	3-12
SW-1246	Loading Motor/LID sensor	3-5
SW-1249	Assignable switch	3-17
SY-322	Disk control processor	3-19
TC-110 (PDW-F330)	TC IN/OUT switch	3-17
TG-249	Timing generator	3-16
TX-105 (PDW-F350)	HD SDI OUT processor	3-20
VF-87	VF interface	3-17
VIO-36 (PDW-F350)	VIDEO, SYNC, TC IN/OUT connector	3-17
VIO-36A (PDW-F330)	Y/B-Y/R-Y out, SYNC connector	3-17
VR-312	Front switch	3-11

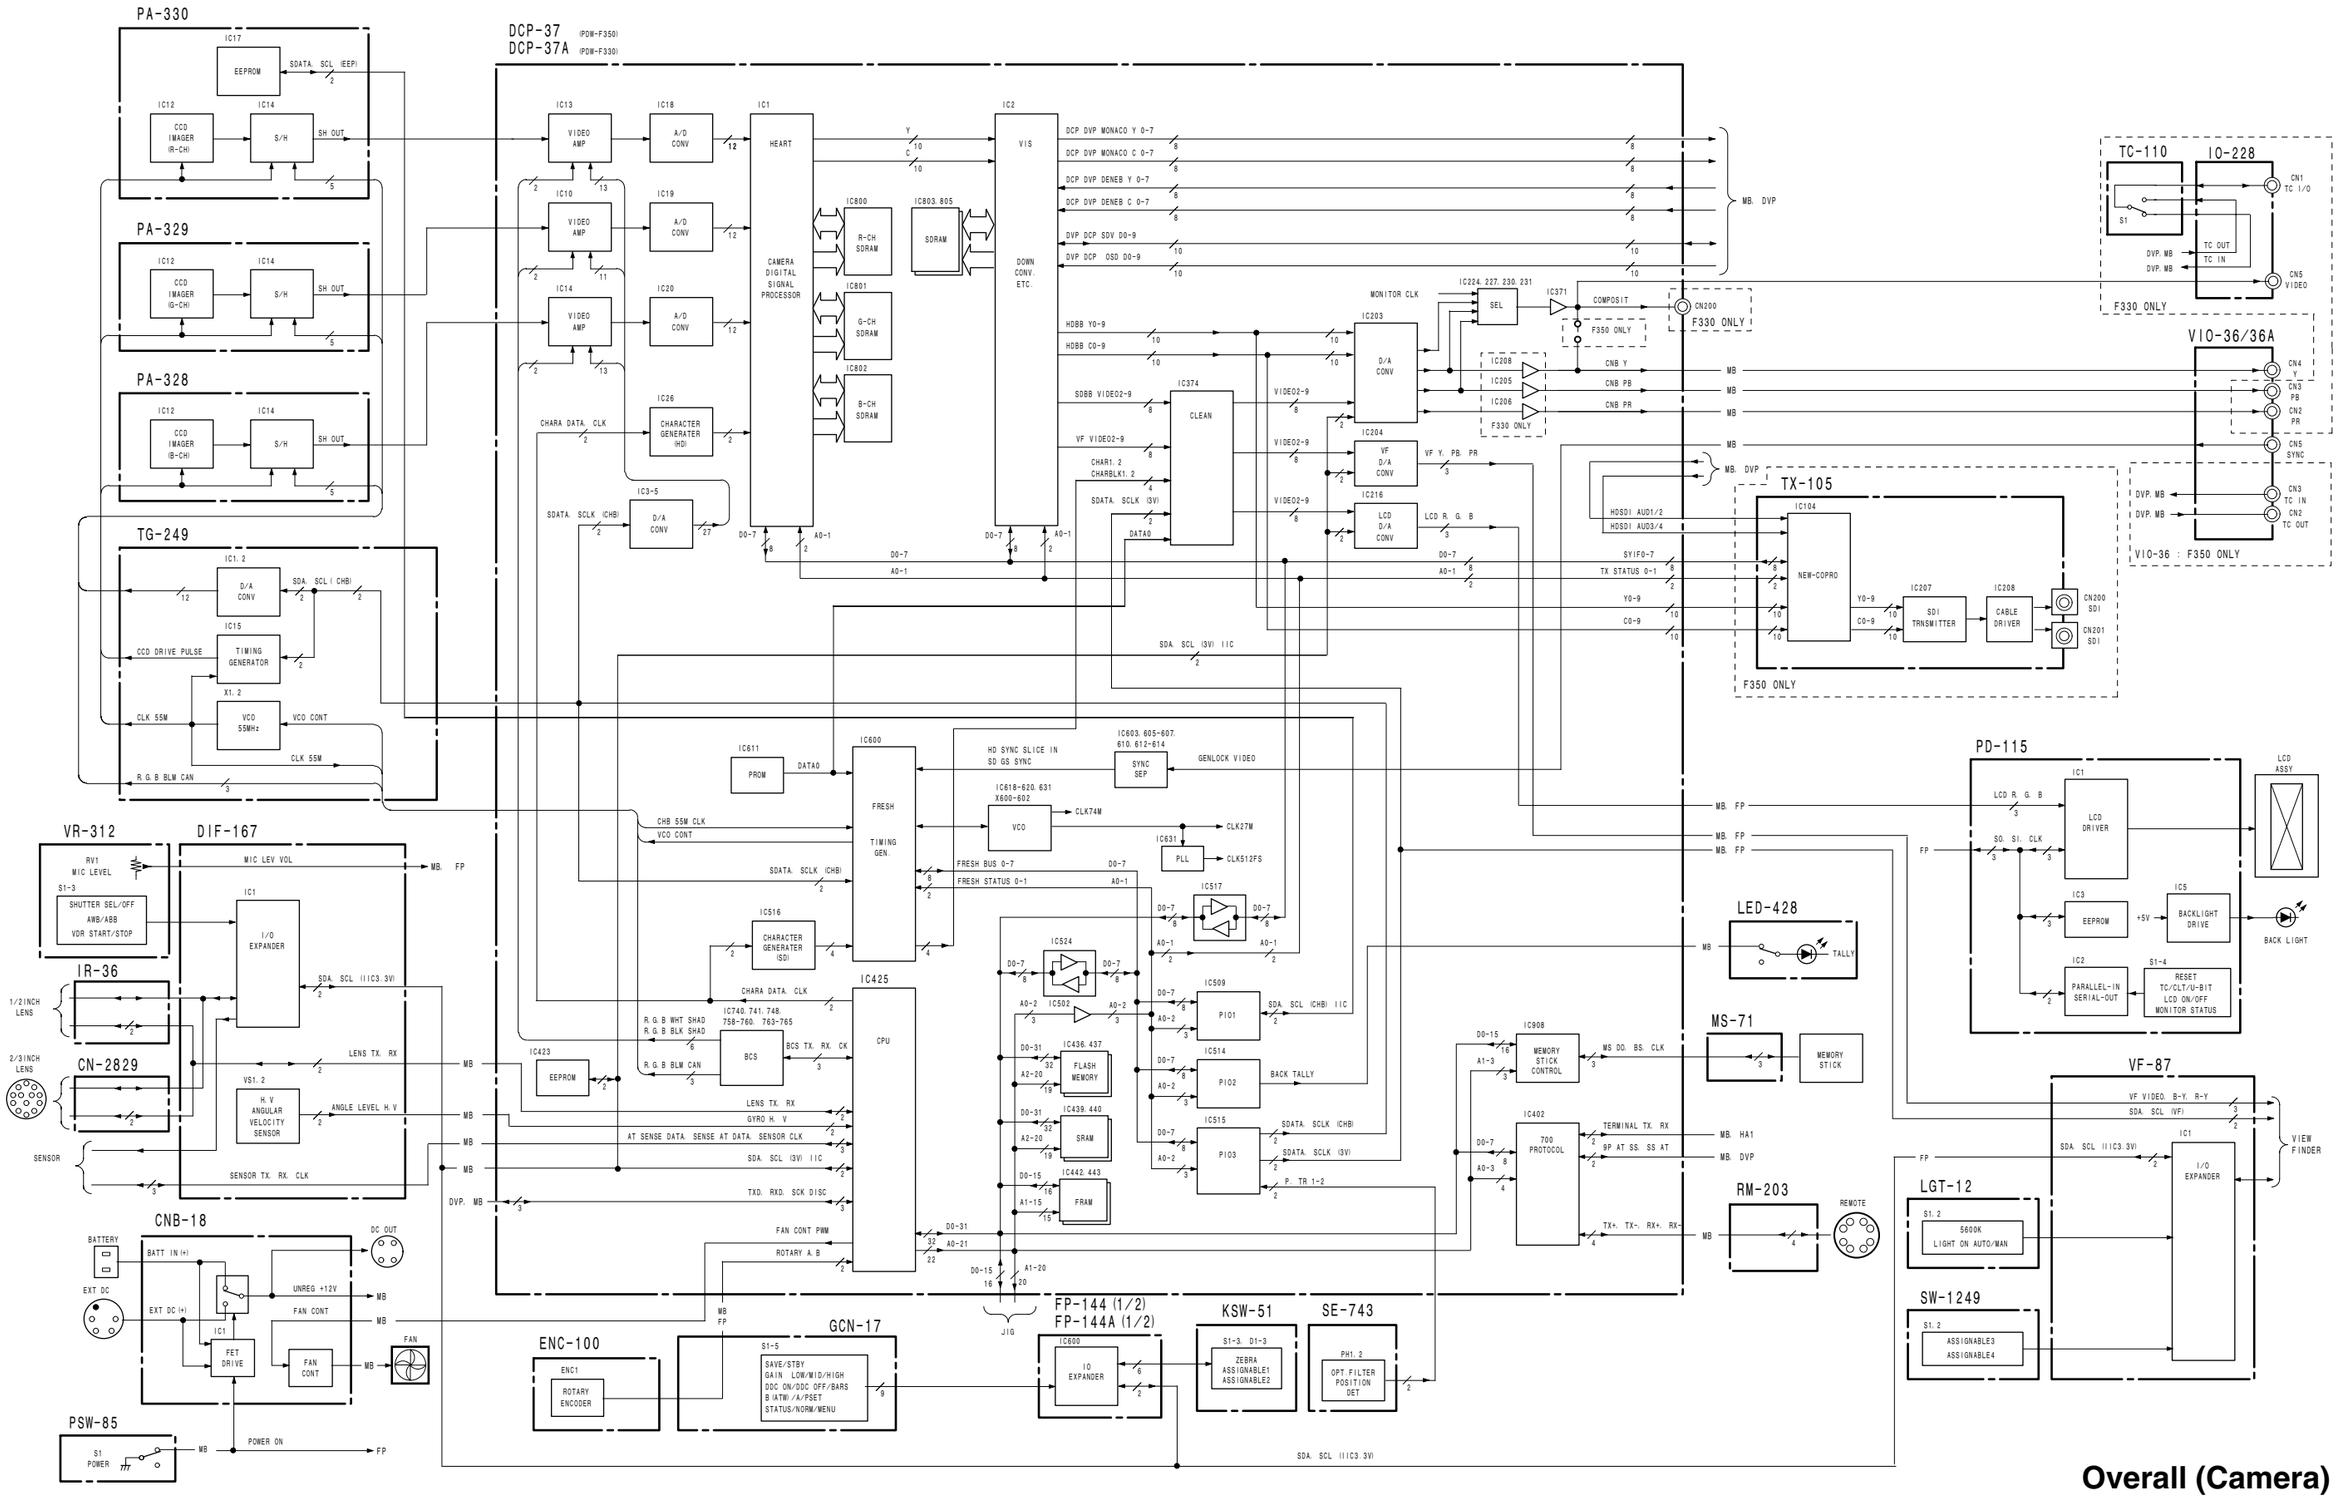

Overall (Camera)

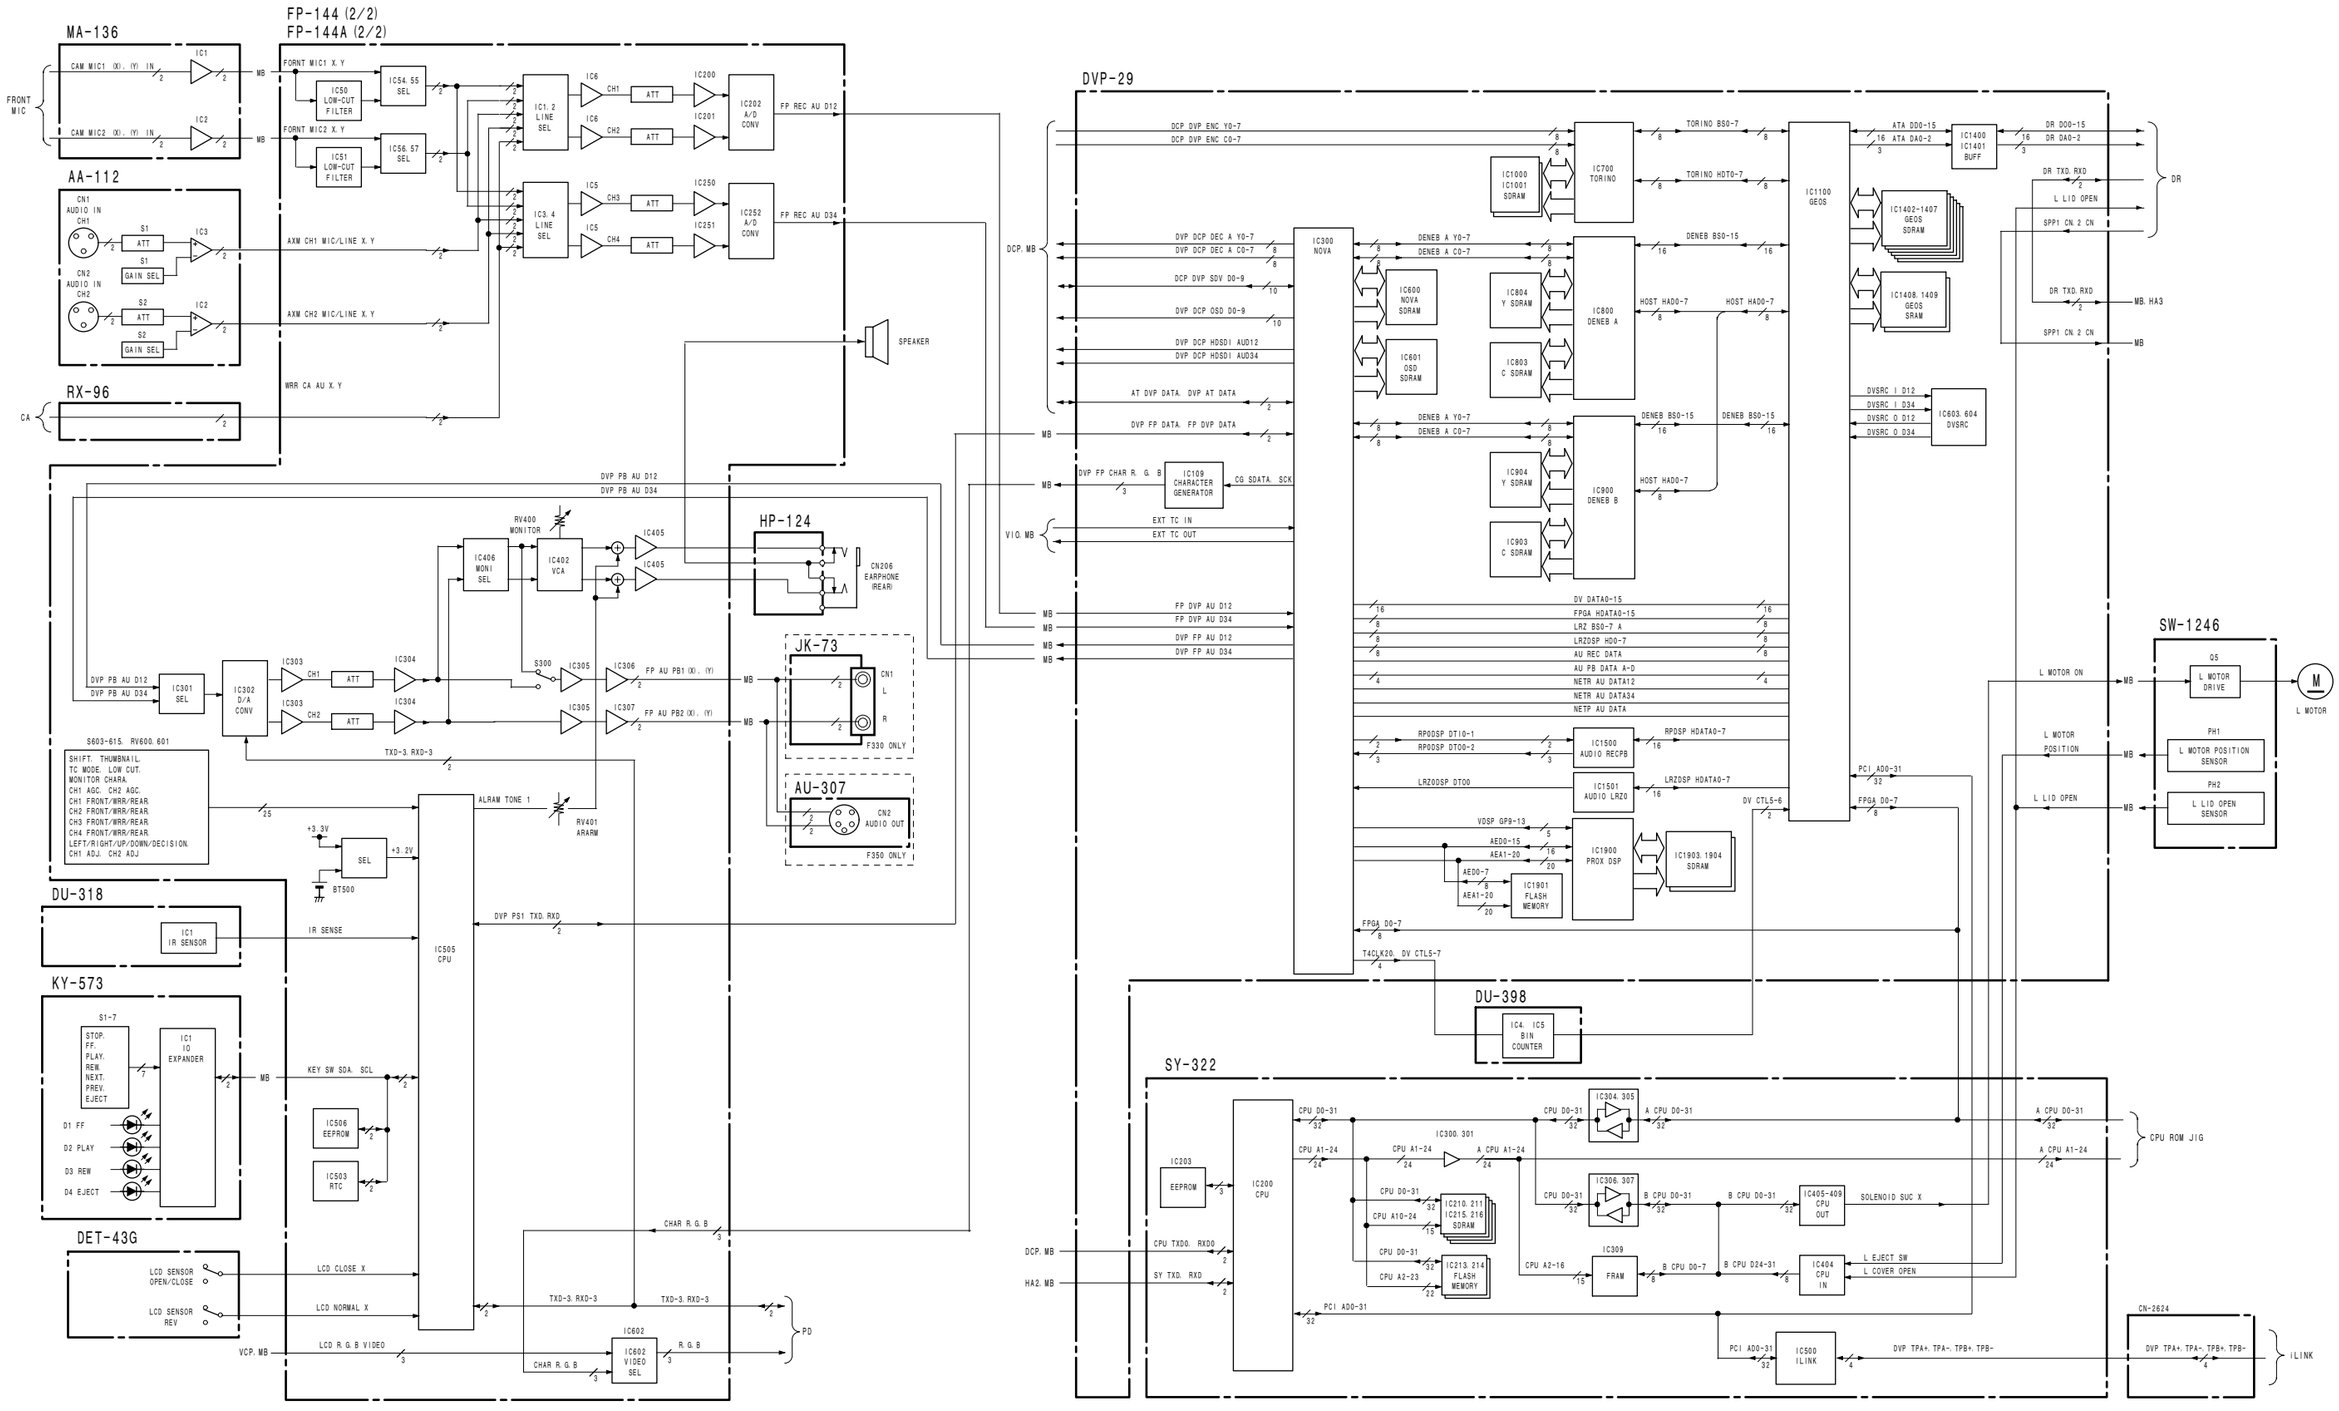
MA-136
FRONT MIC
CAM MIC1 (X), (Y) IN
CAM MIC2 (X), (Y) IN
IC1
IC2
MB
AA-112
CN1 AUDIO IN CH1
CN2 AUDIO IN CH2
S1
S2
ATT
GAIN SEL
IC3
RX-96
CA
FP-144 (2/2)
FP-144A (2/2)
FRONT MIC1 X, Y
FRONT MIC2 X, Y
IC50 LOW-CUT FILTER
IC51 LOW-CUT FILTER
IC54, 55 SEL
IC56, 57 SEL
IC1, 2 LINE SEL
IC3, 4 LINE SEL
IC5
IC6
CH1
CH2
CH3
CH4
IC200
IC201
IC250
IC251
IC202 A/D CONV
IC252 A/D CONV
FP REC AU D12
FP REC AU D34
AXW CH1 MIC/LINE X, Y
AXW CH2 MIC/LINE X, Y
WRR CA AU X, Y
SPEAKER
DVP-29
DCP DVP ENC Y0-7
DCP DVP ENC C0-7
DCP DVP DEC A Y0-7
DCP DVP DEC A C0-7
DCP DVP SDV D0-9
DCP DVP OSD D0-9
DCP DVP HDSDI AUD12
DCP DVP HDSDI AUD34
AT DVP DATA, DVP AT DATA
DVP FP DATA, FP DVP DATA
DCP, MB
VIO, MB
IC300 NOVA
IC1000 IC1001 SDRAM
IC700 TORINO
TORINO BS0-7
TORINO HD0-7
IC1100 GEOS
ATA DD0-15
ATA DA0-2
IC1400 IC1401 BUFF
DR DD0-15
DR DA0-2
DR
DR TXD, RXD
L LID OPEN
SPP1 CN 2 CN
IC1402-1407 GEOS SDRAM
IC1408, 1409 GEOS SRAM
IC600 NOVA SDRAM
IC601 OSD SDRAM
IC804 Y SDRAM
IC803 C SDRAM
IC800 DENEB A
IC900 DENEB B
IC904 Y SDRAM
IC903 C SDRAM
DENEB A Y0-7
DENEB A C0-7
DENEB BS0-15
HOST HA0-7
HOST HD0-7
MB, HA3
DVSRC I D12
DVSRC I D34
DVSRC O D12
DVSRC O D34
IC603, 604 DVSRC
IC109 CHARACTER GENERATOR
DVP FP CHAR R, G, B
CG SDATA, SCK
EXT TC IN
EXT TC OUT
FP DVP AU D12
FP DVP AU D34
DVP FP AU D12
DVP FP AU D34
DV DATA0-15
FPGA HDATA0-15
LRZ BS0-7 A
LRZDSP HD0-7
AU REC DATA
AU PB DATA A-D
NETP AU DATA12
NETP AU DATA34
NETP AU DATA
RP0DSP DTI0-1
RP0DSP DTO0-2
RP0DSP HDATA0-7
IC1500 AUDIO RECPB
LRZ0DSP DTO0
LRZ0SP HDATA0-7
IC1501 AUDIO LRZ0
VDSP GP9-13
AED0-15
AEA1-20
AED0-7
AEA1-20
IC1900 PROX DSP
IC1903, 1904 SDRAM
IC1901 FLASH MEMORY
DV CTL5-6
FPGA DD0-7
FPGA DO-7
PCI AD0-31
T4CLK20, DV CTL5-7
DU-398
IC4, IC5 BIN COUNTER
SW-1246
Q5
L MOTOR DRIVE
L MOTOR
L MOTOR ON
L MOTOR POSITION
L LID OPEN
PH1
L MOTOR POSITION SENSOR
PH2
L LID OPEN SENSOR
HP-124
CN206 EARPHONE (REAR)
RV400 MONITOR
IC406 MON1 SEL
IC402 VCA
IC405
DVP PB AU D12
DVP PB AU D34
IC301 SEL
IC302 D/A CONV
IC303
IC304
IC305
S300
IC306 FP AU PB1 (X), (Y)
IC307 FP AU PB2 (X), (Y)
JK-73
CN1
L
R
F330 ONLY
AU-307
CN2 AUDIO OUT
F350 ONLY
S603-615, RV600, 601
SHIFT, THUMBNAIL,
TC MODE, LOW CUT,
MONITOR CHARA,
CH1 AGC, CH2 AGC,
CH1 FRONT/WRR/REAR,
CH2 FRONT/WRR/REAR,
CH3 FRONT/WRR/REAR,
CH4 FRONT/WRR/REAR,
LEFT/RIGHT/UP/DOWN/DECISION,
CH1 ADJ, CH2 ADJ
TXD-3, RXD-3
ALRAM TONE 1
RV401 ARARM
+3.3V
+3.2V
SEL
BT500
DU-318
IC1 IR SENSOR
IR SENSE
IC505 CPU
DVP PS1 TXD, RXD
KY-573
S1-7
STOP, FF, PLAY, REW, NEXT, PREV, EJECT
IC1 IO EXPANDER
D1 FF
D2 PLAY
D3 REW
D4 EJECT
KEY SW SDA, SCL
IC506 EEPROM
IC503 RTC
DET-43G
LCD SENSOR OPEN/CLOSE
LCD SENSOR REV
LCD CLOSE X
LCD NORMAL X
LCD R, G, B VIDEO
VCP, MB
CHAR R, G, B
IC602 VIDEO SEL
R, G, B
PD
SY-322
IC203 EEPROM
IC200 CPU
IC300, 301
IC304, 305
IC304, 307
CPU D0-31
CPU A1-24
A CPU D0-31
A CPU A1-24
B CPU D0-31
B CPU D24-31
CPU A10-24
CPU A2-16
CPU A2-23
IC210, 211 IC215, 216 SDRAM
IC213, 214 FLASH MEMORY
IC309 FRAM
IC405-409 CPU OUT
IC404 CPU IN
SOLENOID SUC X
L EJECT SW
L COVER OPEN
CPU ROM JIG
CPU TXD0, RXD0
SY TXD, RXD
DCP, MB
HA2, MB
PCI AD0-31
IC500 iLINK
CN-2624
DVP TPA+, TPA-, TPB+, TPB-
iLINK

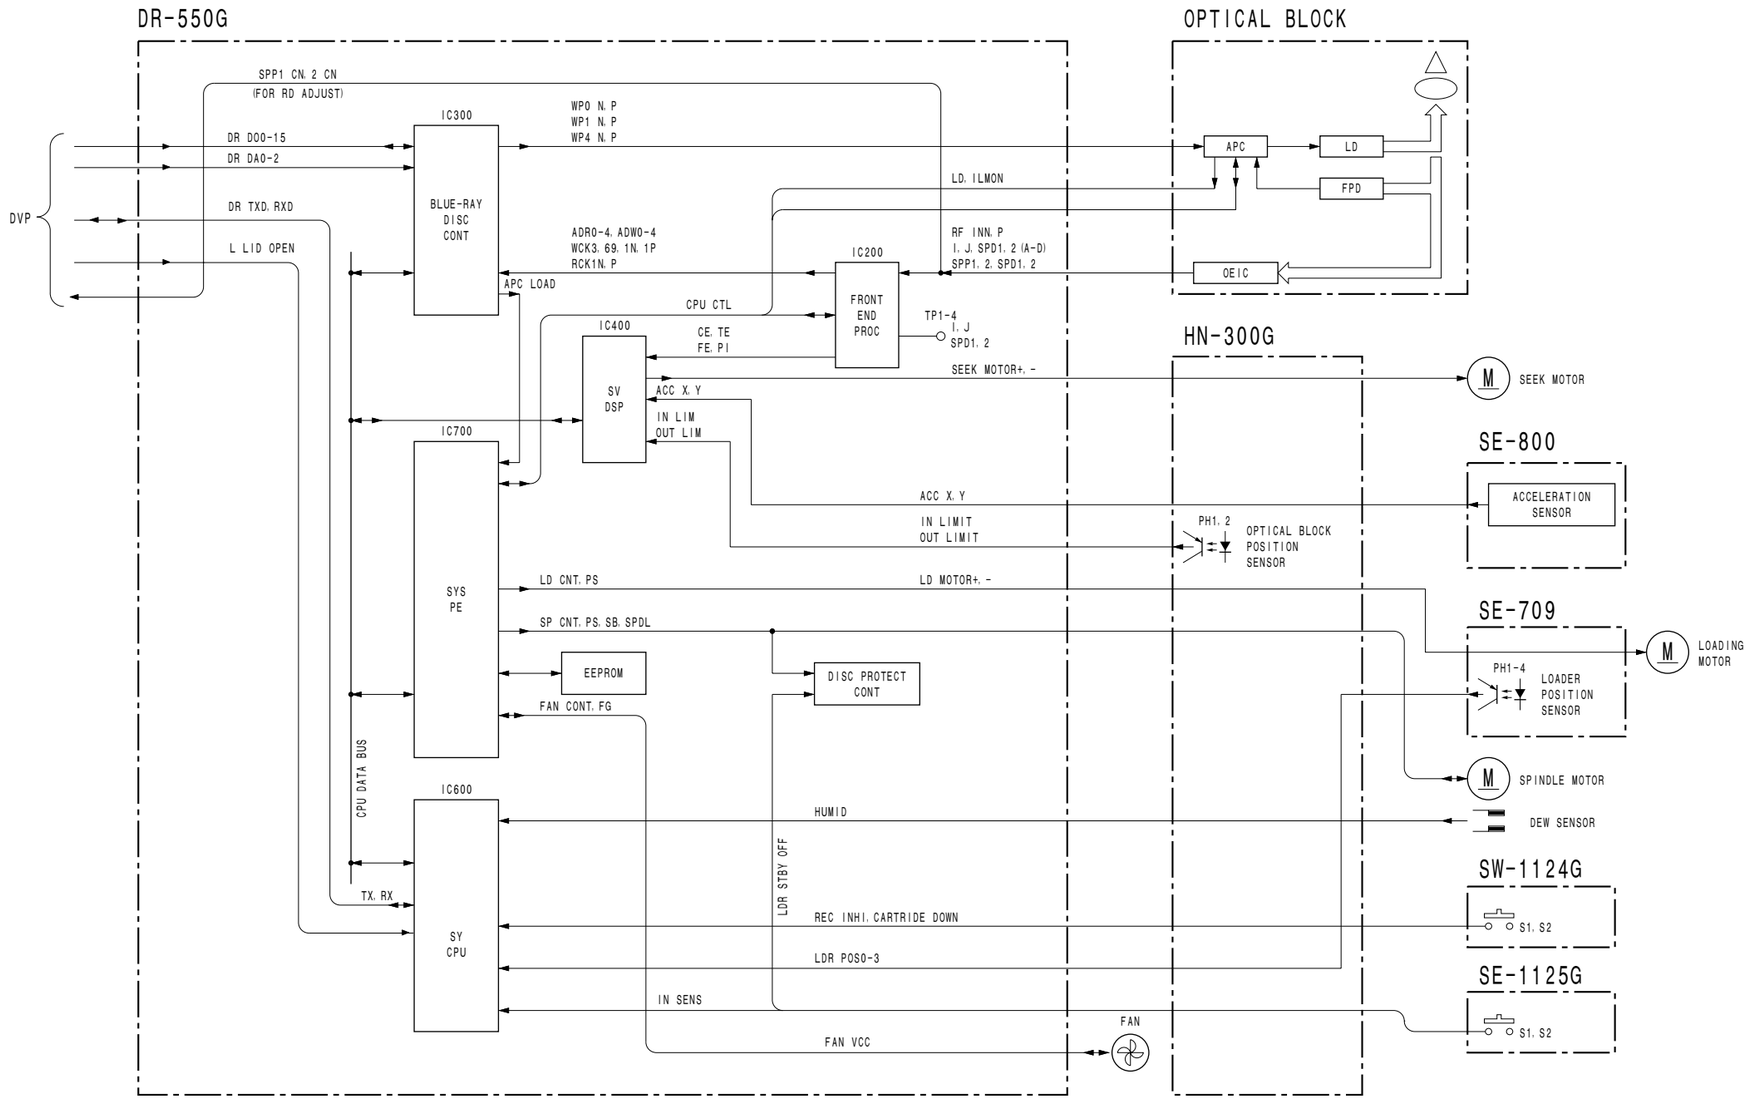
DR-550G
OPTICAL BLOCK
HN-300G
SPP1 CN. 2 CN
(FOR RD ADJUST)
IC300
BLUE-RAY
DISC
CONT
WP0 N. P
WP1 N. P
WP4 N. P
DR D00-15
DR DA0-2
DVP
DR TXD. RXD
L LID OPEN
APC
LD
FPD
OEIC
LD. ILMON
ADR0-4. ADW0-4
WCK3. 69. 1N. 1P
RCK1N. P
RF INN. P
I. J. SPD1. 2 (A-D)
SPP1. 2. SPD1. 2
IC200
FRONT
END
PROC
APC LOAD
CPU CTL
TP1-4
I. J
SPD1. 2
IC400
SV
DSP
CE. TE
FE. PI
SEEK MOTOR+. -
SEEK MOTOR
ACC X. Y
IN LIM
OUT LIM
IC700
SYS
PE
SE-800
ACCELERATION
SENSOR
ACC X. Y
IN LIMIT
OUT LIMIT
PH1. 2
OPTICAL BLOCK
POSITION
SENSOR
LD CNT. PS
LD MOTOR+. -
SE-709
SP CNT. PS. SB. SPDL
LOADING
MOTOR
EEPROM
DISC PROTECT
CONT
PH1-4
LOADER
POSITION
SENSOR
FAN CONT. FG
CPU DATA BUS
IC600
SPINDLE MOTOR
HUMID
DEW SENSOR
SW-1124G
TX. RX
LDR STBY OFF
REC INHI. CARTRIDE DOWN
S1. S2
LDR POS0-3
SE-1125G
SY
CPU
IN SENS
S1. S2
FAN
FAN VCC

AA-112, MA-136, SW-1246

AA-112

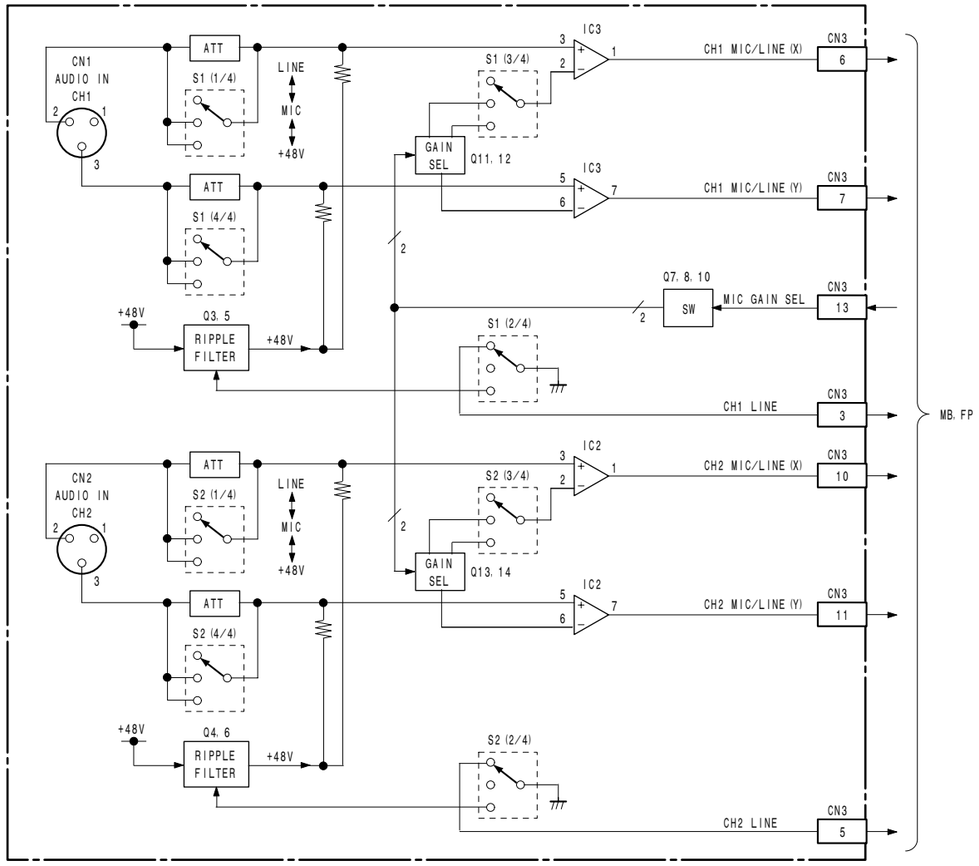

SW-1246

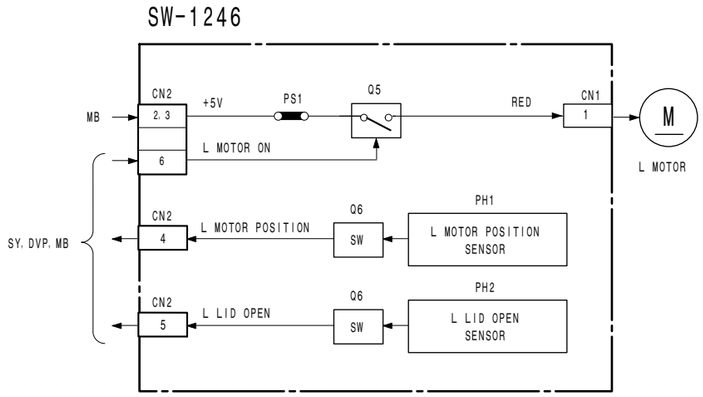

MA-136

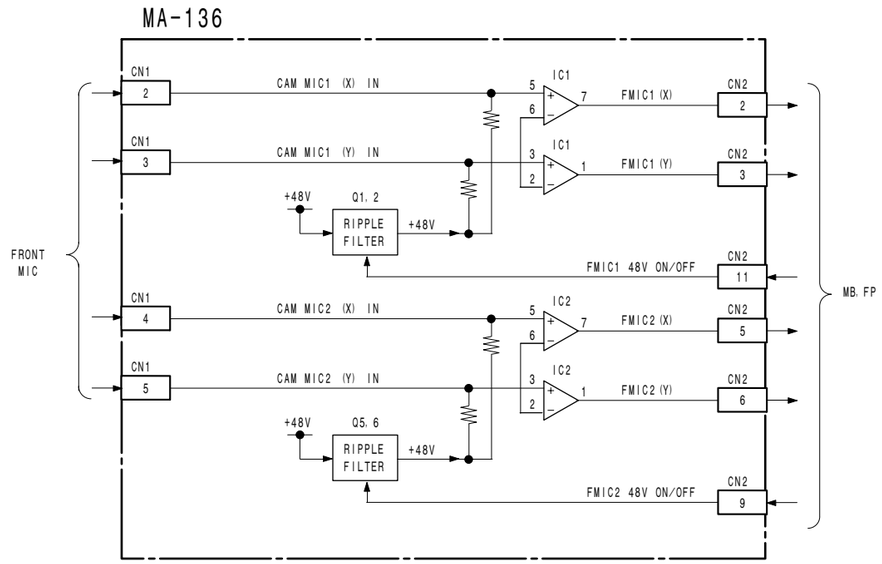

CH-1/2 AUDIO IN connectors
AA-112

Camera MIC IN connector
MA-136

Loading Motor/LID sensor
SW-1246

3-5

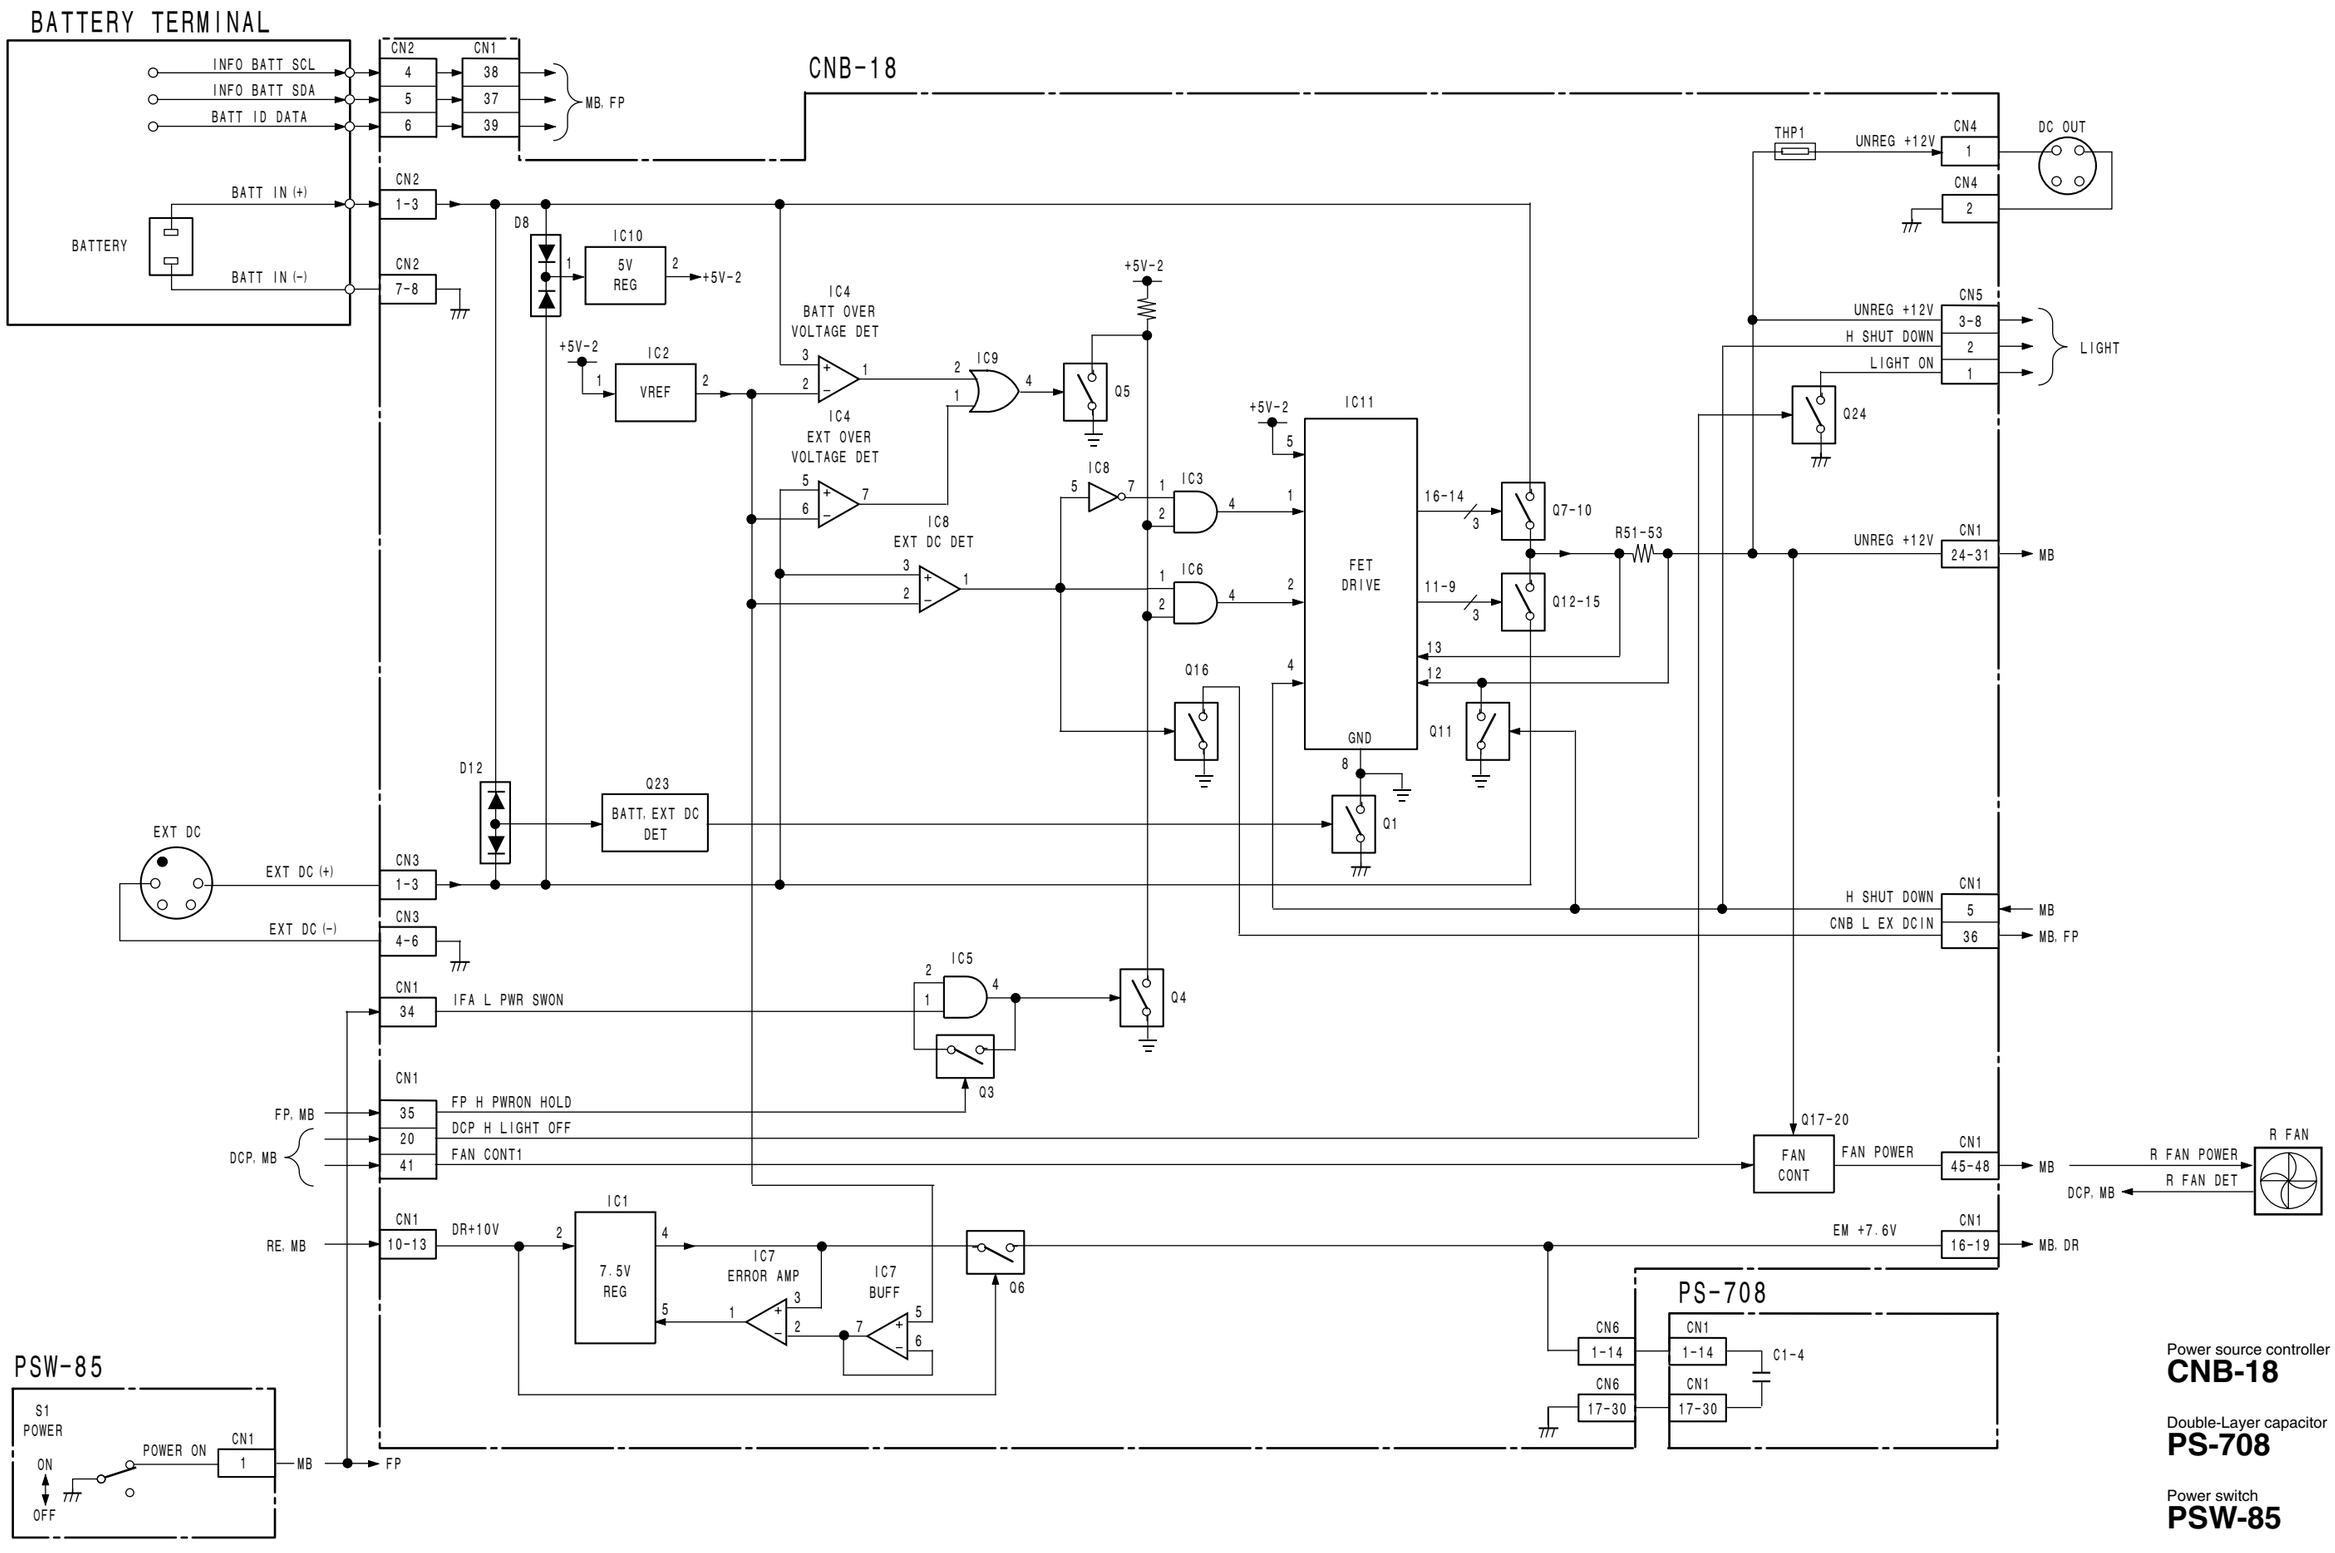

Power source controller
CNB-18

Double-Layer capacitor
PS-708

Power switch
PSW-85

DCP-37/37A (1/4)

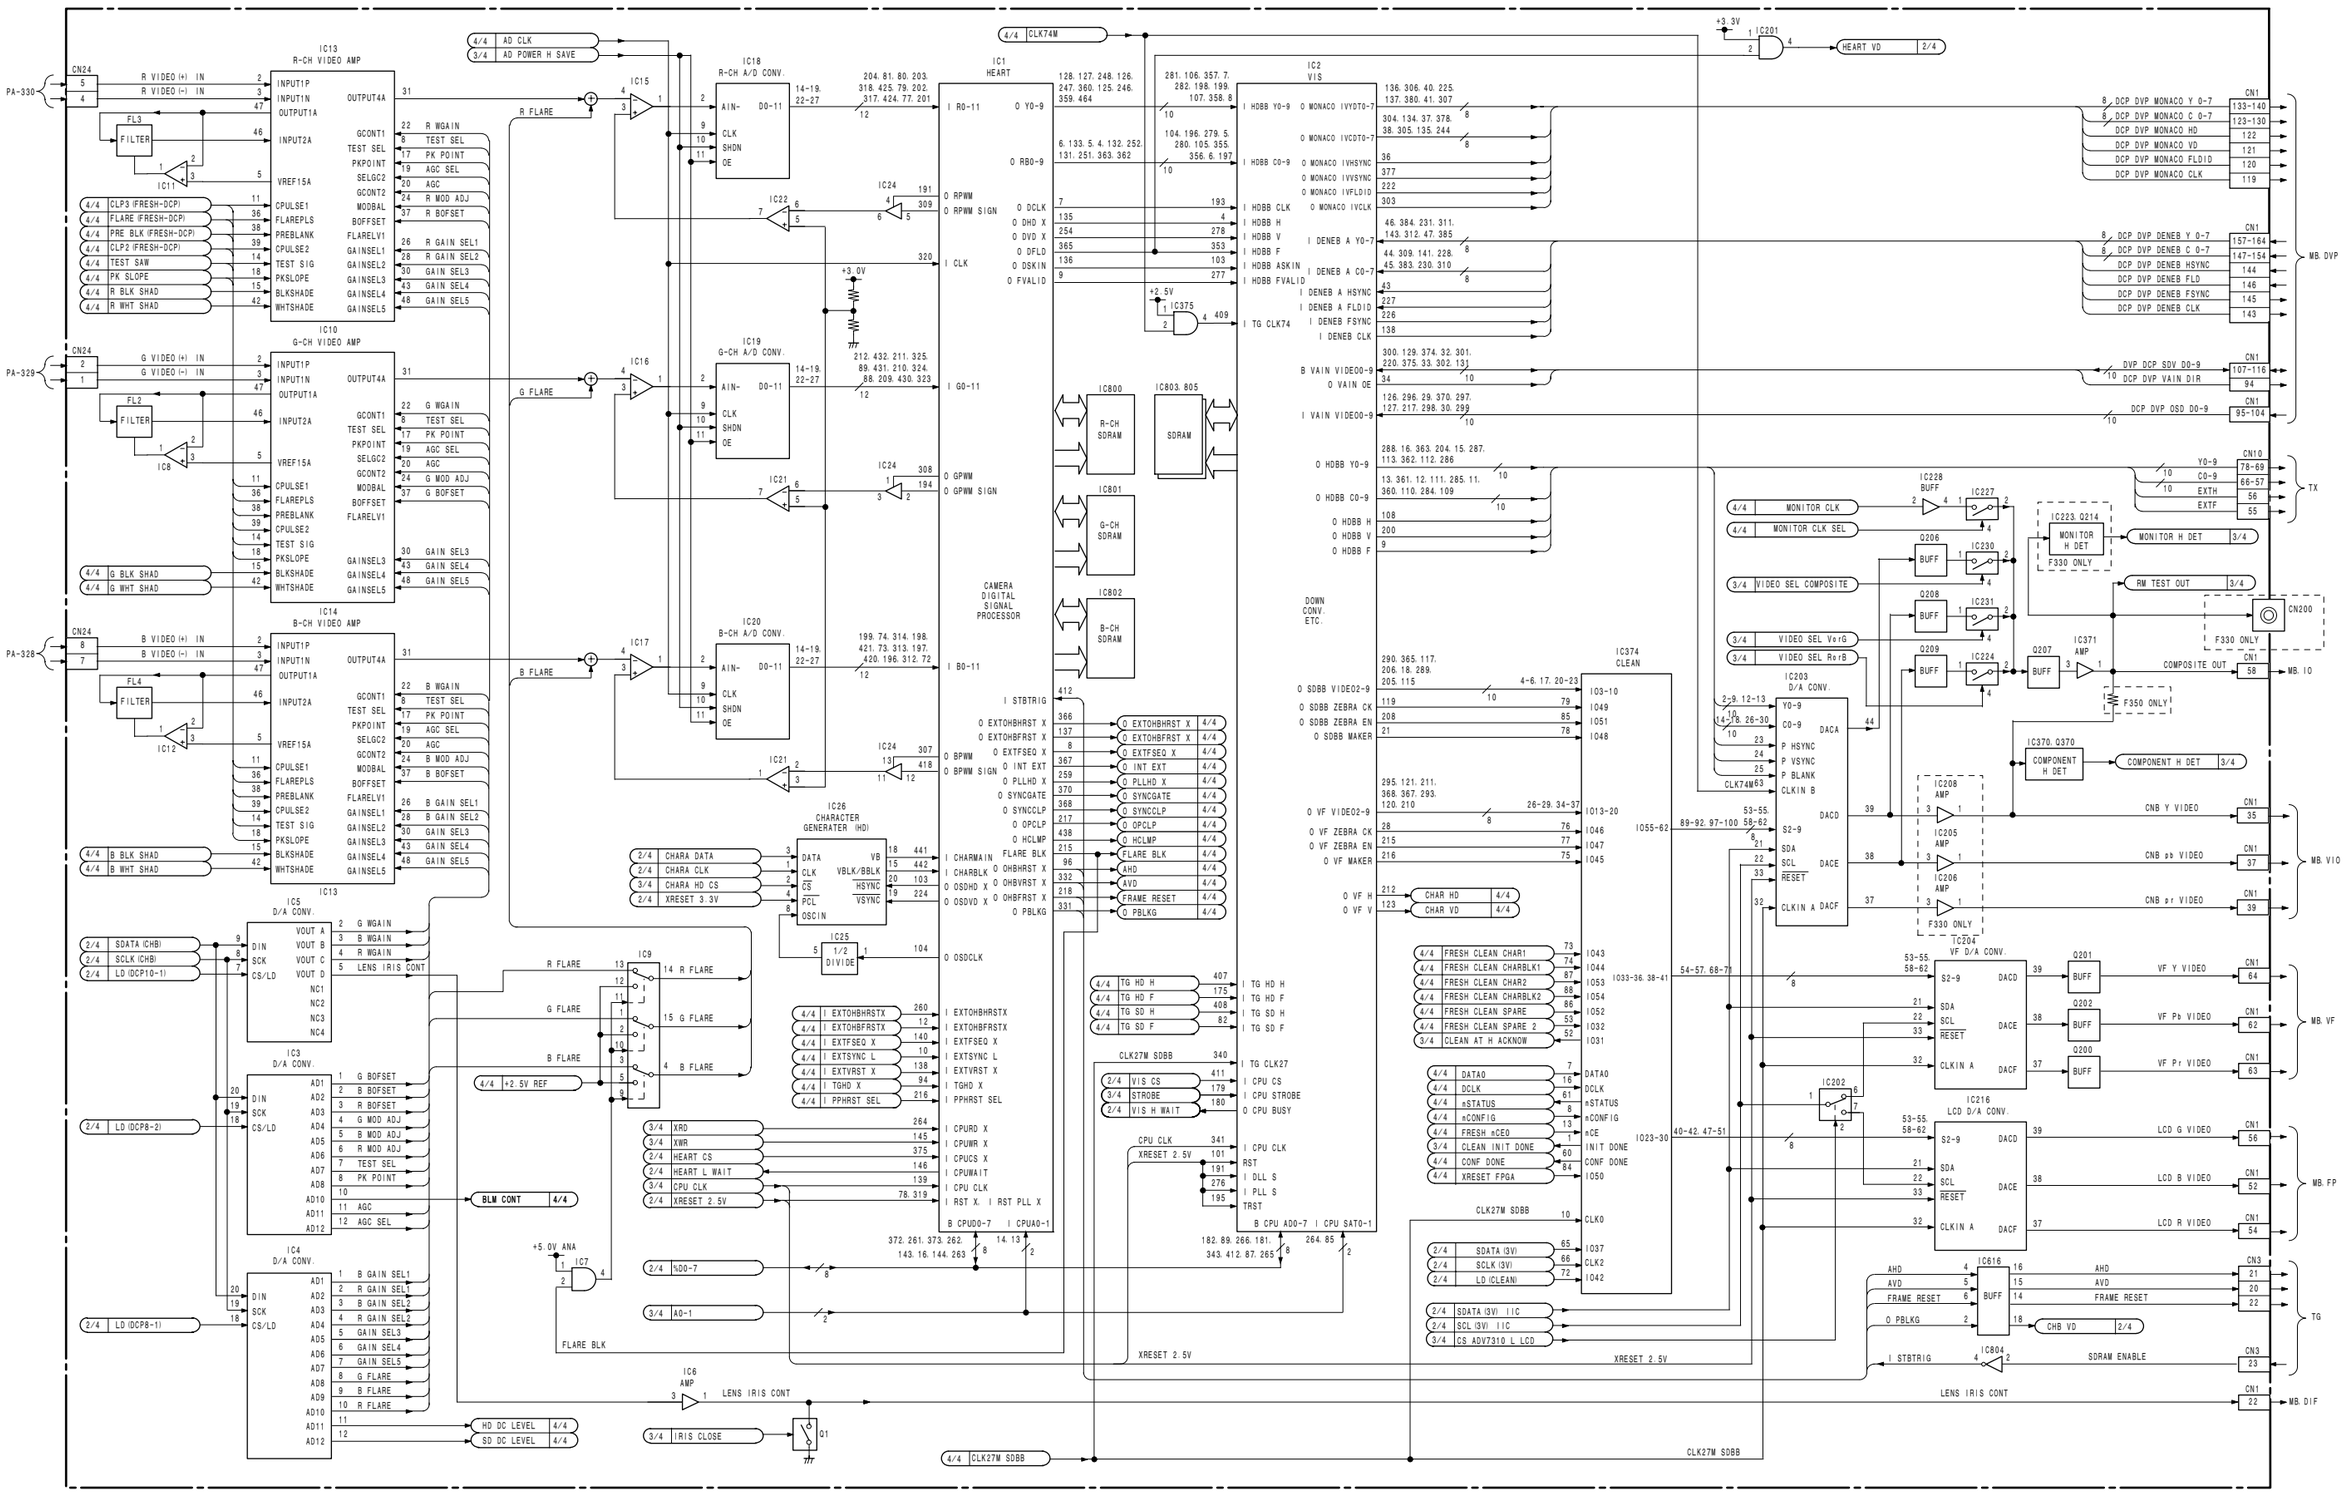
IC13 R-CH VIDEO AMP
IC10 G-CH VIDEO AMP
IC14 B-CH VIDEO AMP
IC18 R-CH A/D CONV.
IC19 G-CH A/D CONV.
IC20 B-CH A/D CONV.
IC1 HEART
IC2 VIS
IC26 CHARACTER GENERATOR (HD)
IC5 D/A CONV.
IC3 D/A CONV.
IC4 D/A CONV.
IC9
IC15
IC16
IC17
IC6 AMP
IC7
IC11
IC12
IC8
IC21
IC22
IC24
IC25
IC800 R-CH SDRAM
IC801 G-CH SDRAM
IC802 B-CH SDRAM
IC803, 805 SDRAM
CAMERA DIGITAL SIGNAL PROCESSOR
DOWN CONV. ETC.
IC374 CLEAN
IC228 BUFF
IC227
IC230
IC231
IC224
IC223, Q214 MONITOR H DET
IC203 D/A CONV.
IC208 AMP
IC205 AMP
IC206 AMP
IC204 VF D/A CONV.
IC202
IC216 LCD D/A CONV.
IC616
IC804
IC371 AMP
IC370, Q370 COMPONENT H DET
Q206
Q208
Q209
Q207
Q201
Q202
Q200
IC201
CN24
CN1
CN10
CN200
FL2
FL3
FL4
Q1
PA-330
PA-329
PA-328
R VIDEO (+) IN
R VIDEO (-) IN
G VIDEO (+) IN
G VIDEO (-) IN
B VIDEO (+) IN
B VIDEO (-) IN
R FLARE
G FLARE
B FLARE
AD CLK
AD POWER H SAVE
CLK74M
+3.3V
+3.0V
+2.5V
+5.0V ANA
HEART VD
MONITOR CLK
MONITOR CLK SEL
VIDEO SEL COMPOSITE
VIDEO SEL VorG
VIDEO SEL RorB
RM TEST OUT
COMPOSITE OUT
MONITOR H DET
COMPONENT H DET
CNB Y VIDEO
CNB pb VIDEO
CNB pr VIDEO
VF Y VIDEO
VF Pb VIDEO
VF Pr VIDEO
LCD G VIDEO
LCD B VIDEO
LCD R VIDEO
AHD
AVD
FRAME RESET
CHB VD
SDRAM ENABLE
LENS IRIS CONT
XRESET 2.5V
CLK27M SDBB
CLK27W SDBB
MB. DVP
MB. VIO
MB. VF
MB. FP
MB. DIF
MB. IO
TX
TG
F330 ONLY
F350 ONLY

DCP-37 (2/4), DCP-37A (2/4), MS-71

DCP-37/37A (2/4)

MS-71

Camera video signal processor
DCP-37 (2/4)

Camera video signal processor
DCP-37A (2/4)

Memory stick
MS-71

3-8

DCP-37 (3/4), DCP-37A (3/4), LED-428, RM-203, SE-743

DCP-37/37A (3/4)

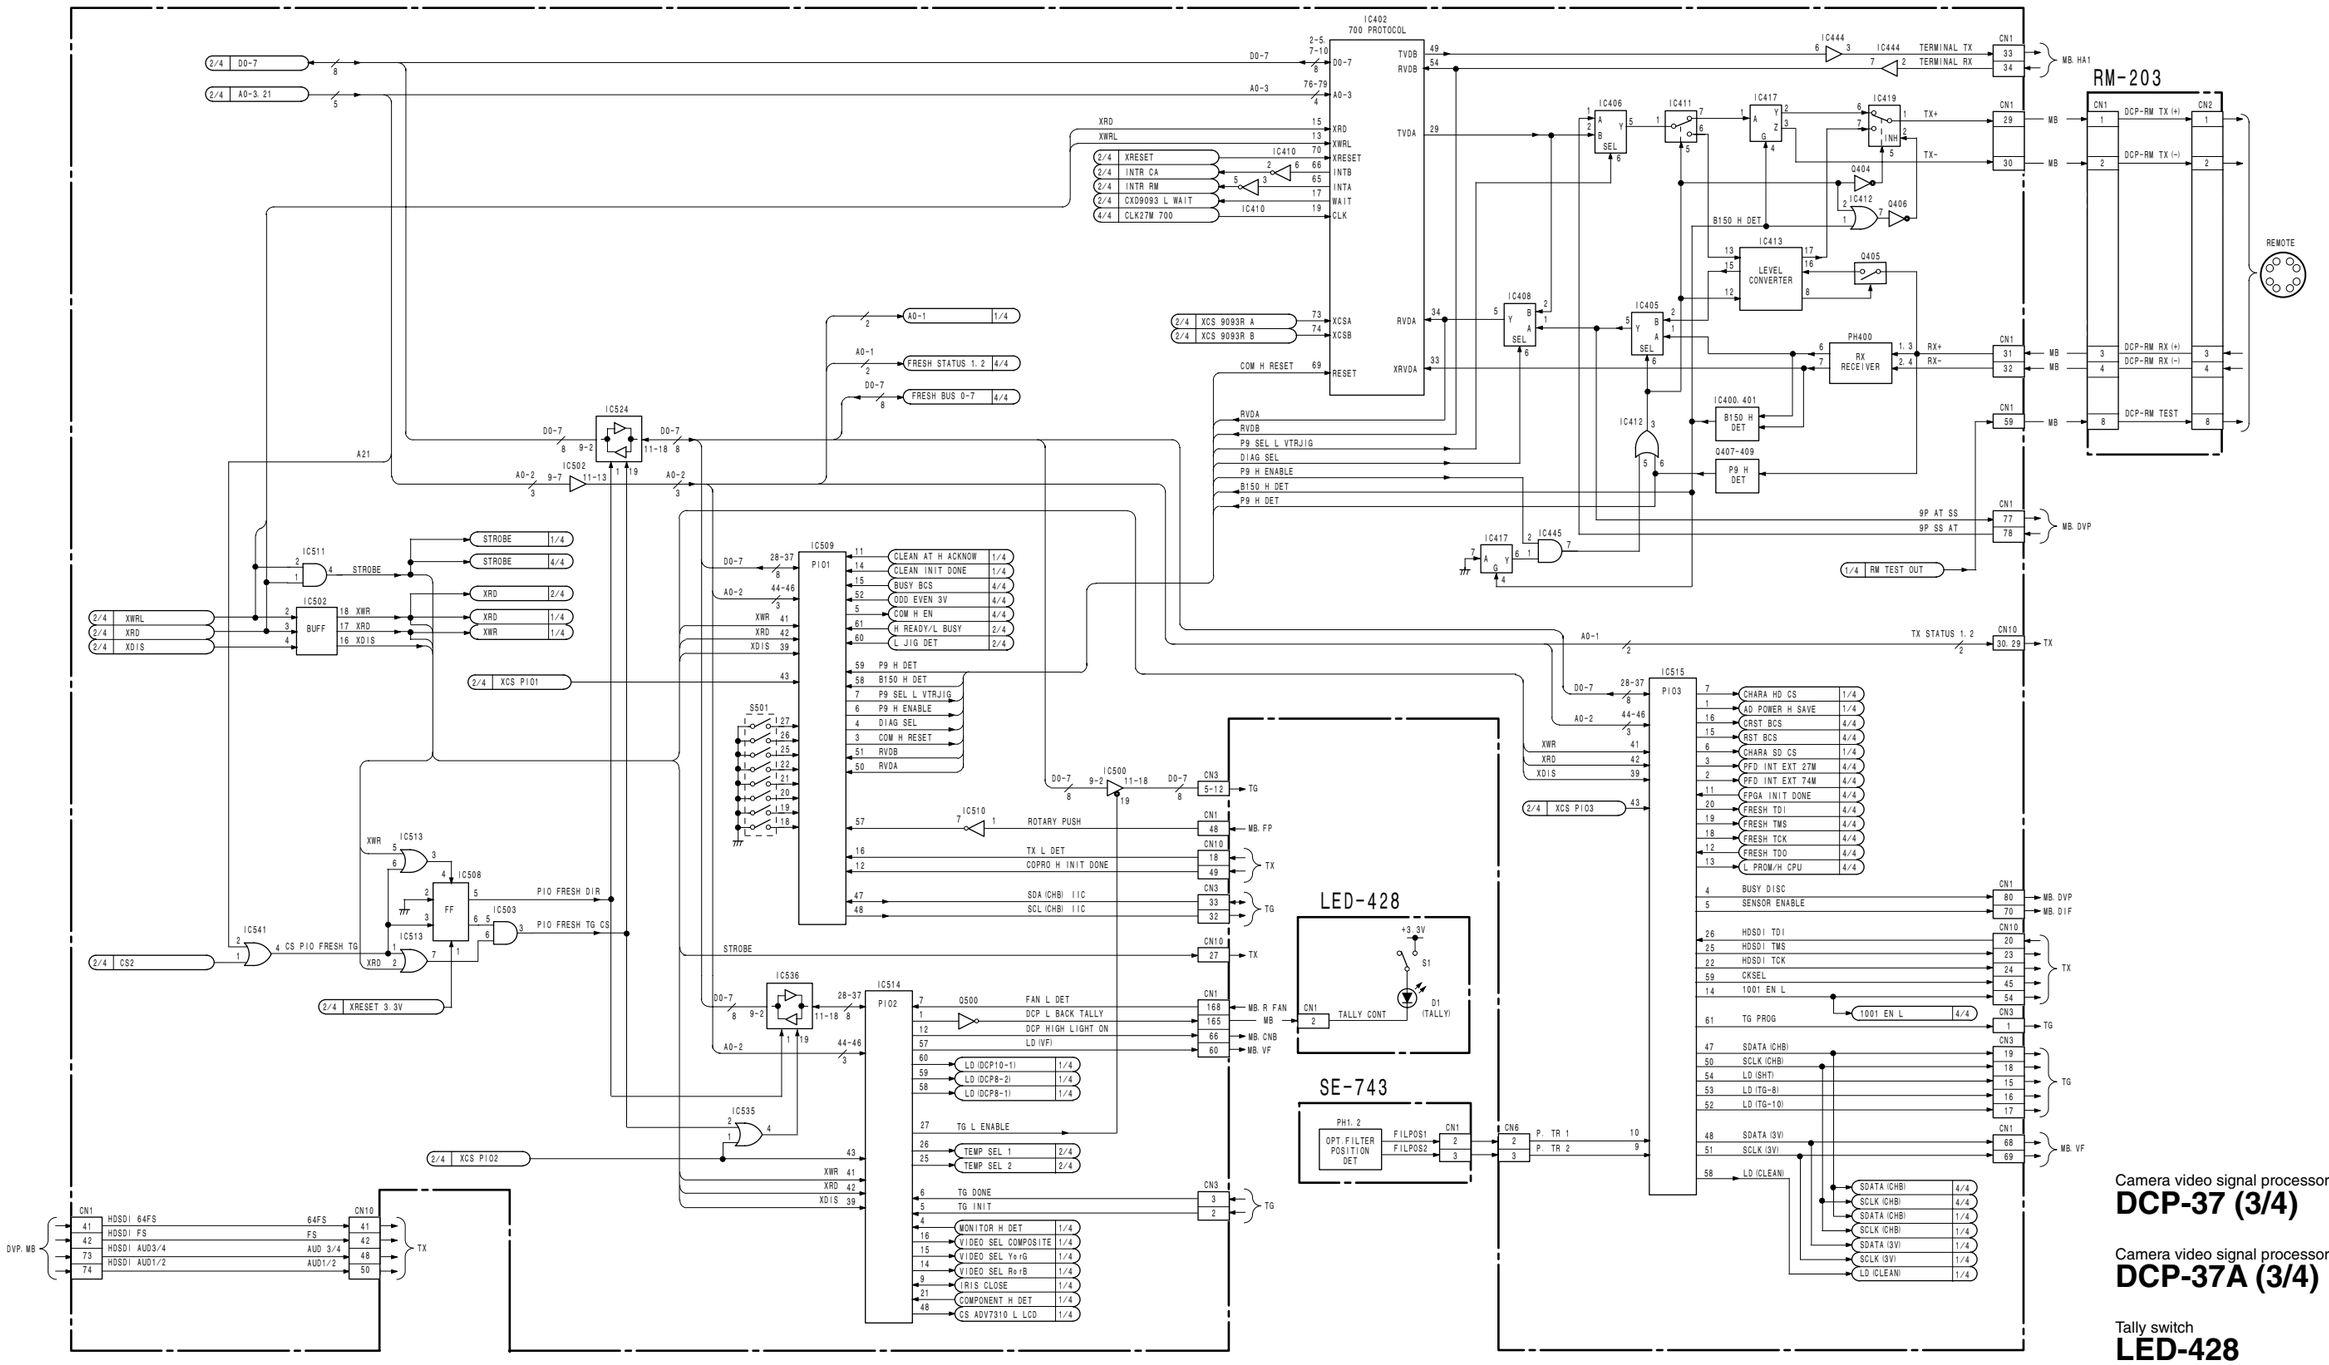

Camera video signal processor
DCP-37 (3/4)

Camera video signal processor
DCP-37A (3/4)

Tally switch
LED-428

Remote connector
RM-203

Optical filter position sensor
SE-743

DCP-37 (4/4), DCP-37A (4/4)

DCP-37/37A (4/4)

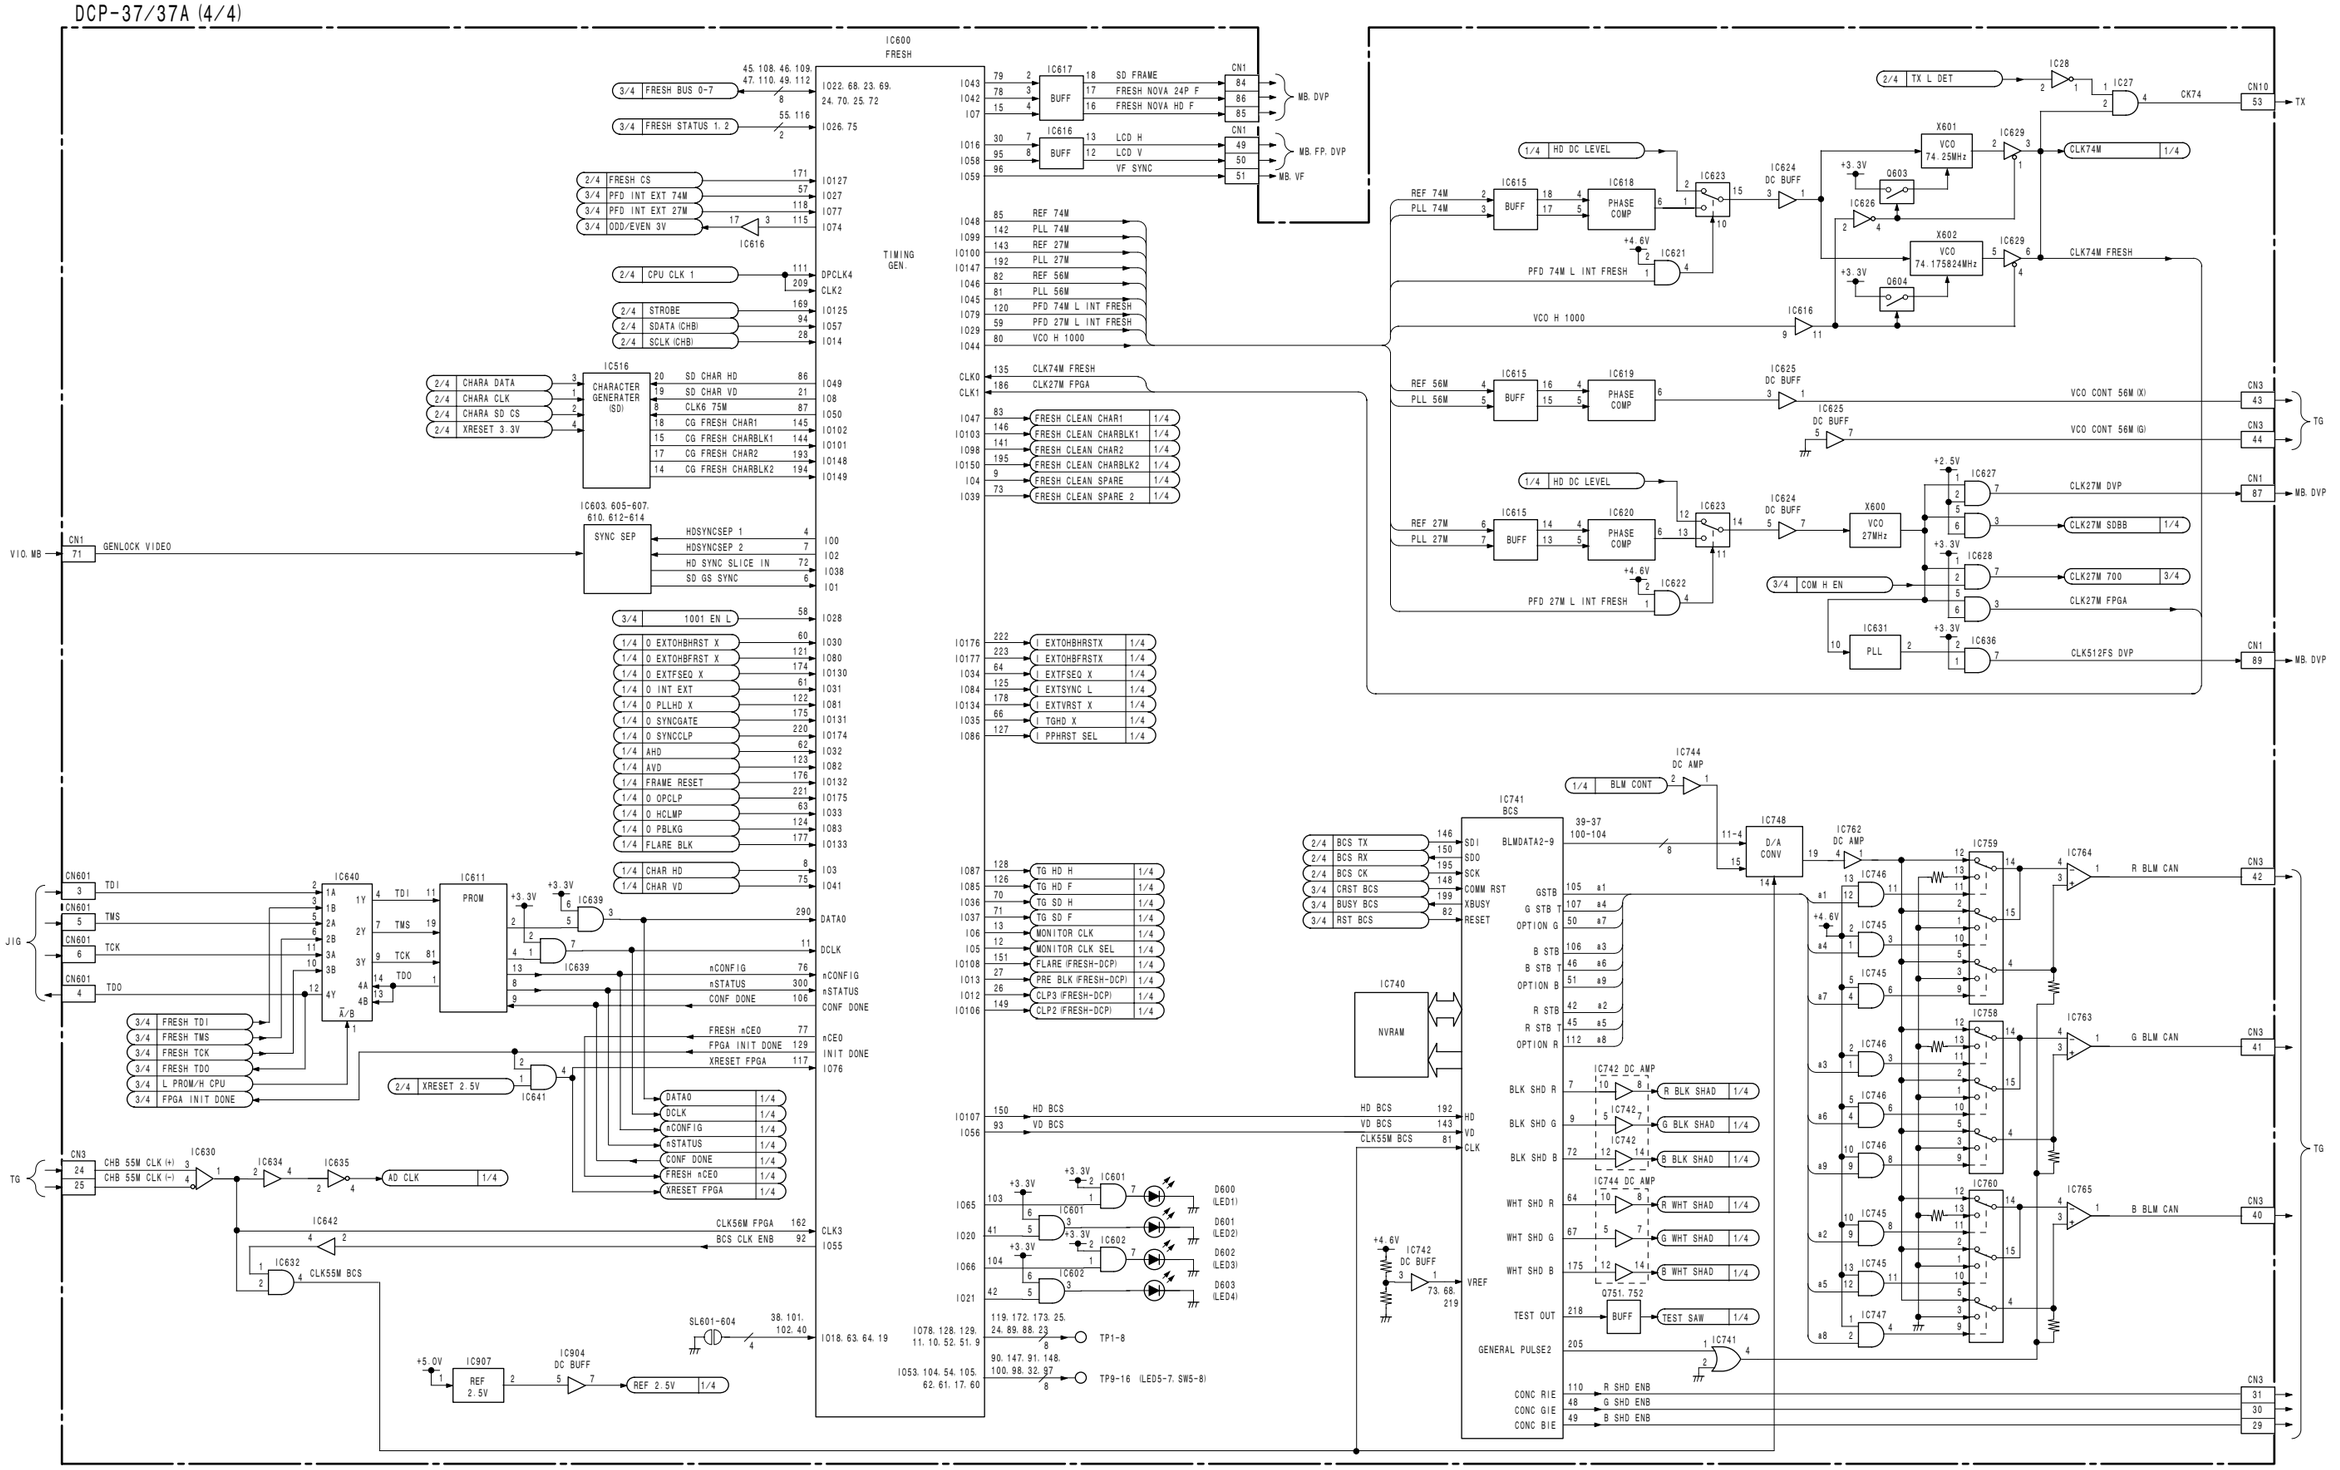

Camera video signal processor
DCP-37 (4/4)

Camera video signal processor
DCP-37A (4/4)

3-10

CN-2829, DIF-167, IR-36, VR-312

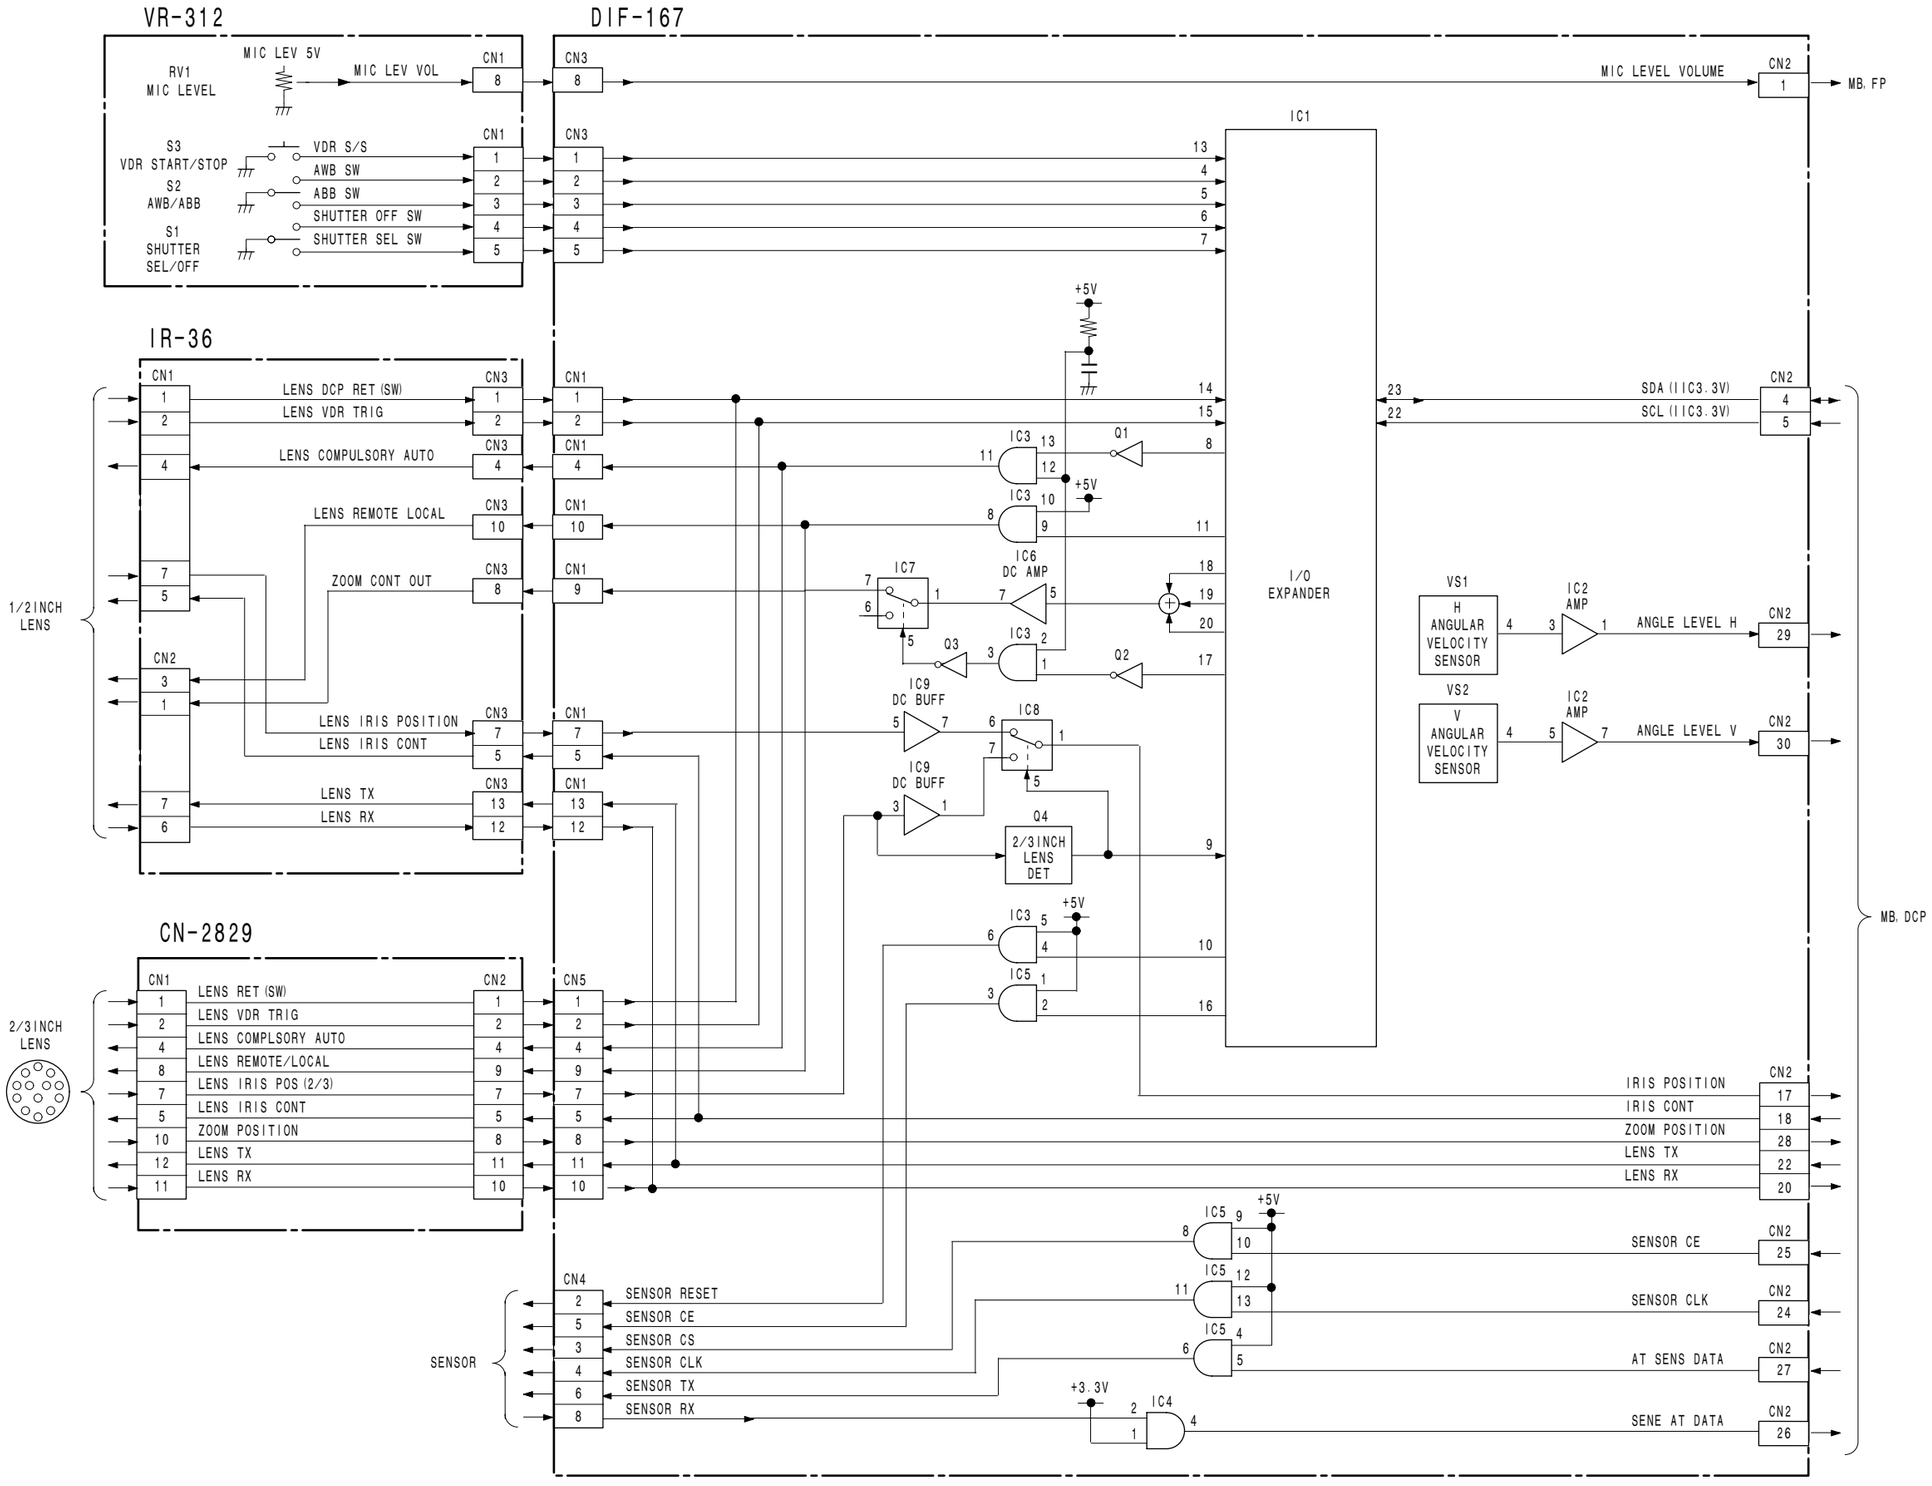

2/3 inch lens connector
CN-2829

Auto focus/Angular rate sensor
DIF-167

1/2 inch lens connector
IR-36

Front switch
VR-312

3-11

DR-550G, HN-300G, SE-709, SE-800, SW-1124G, SW-1125G

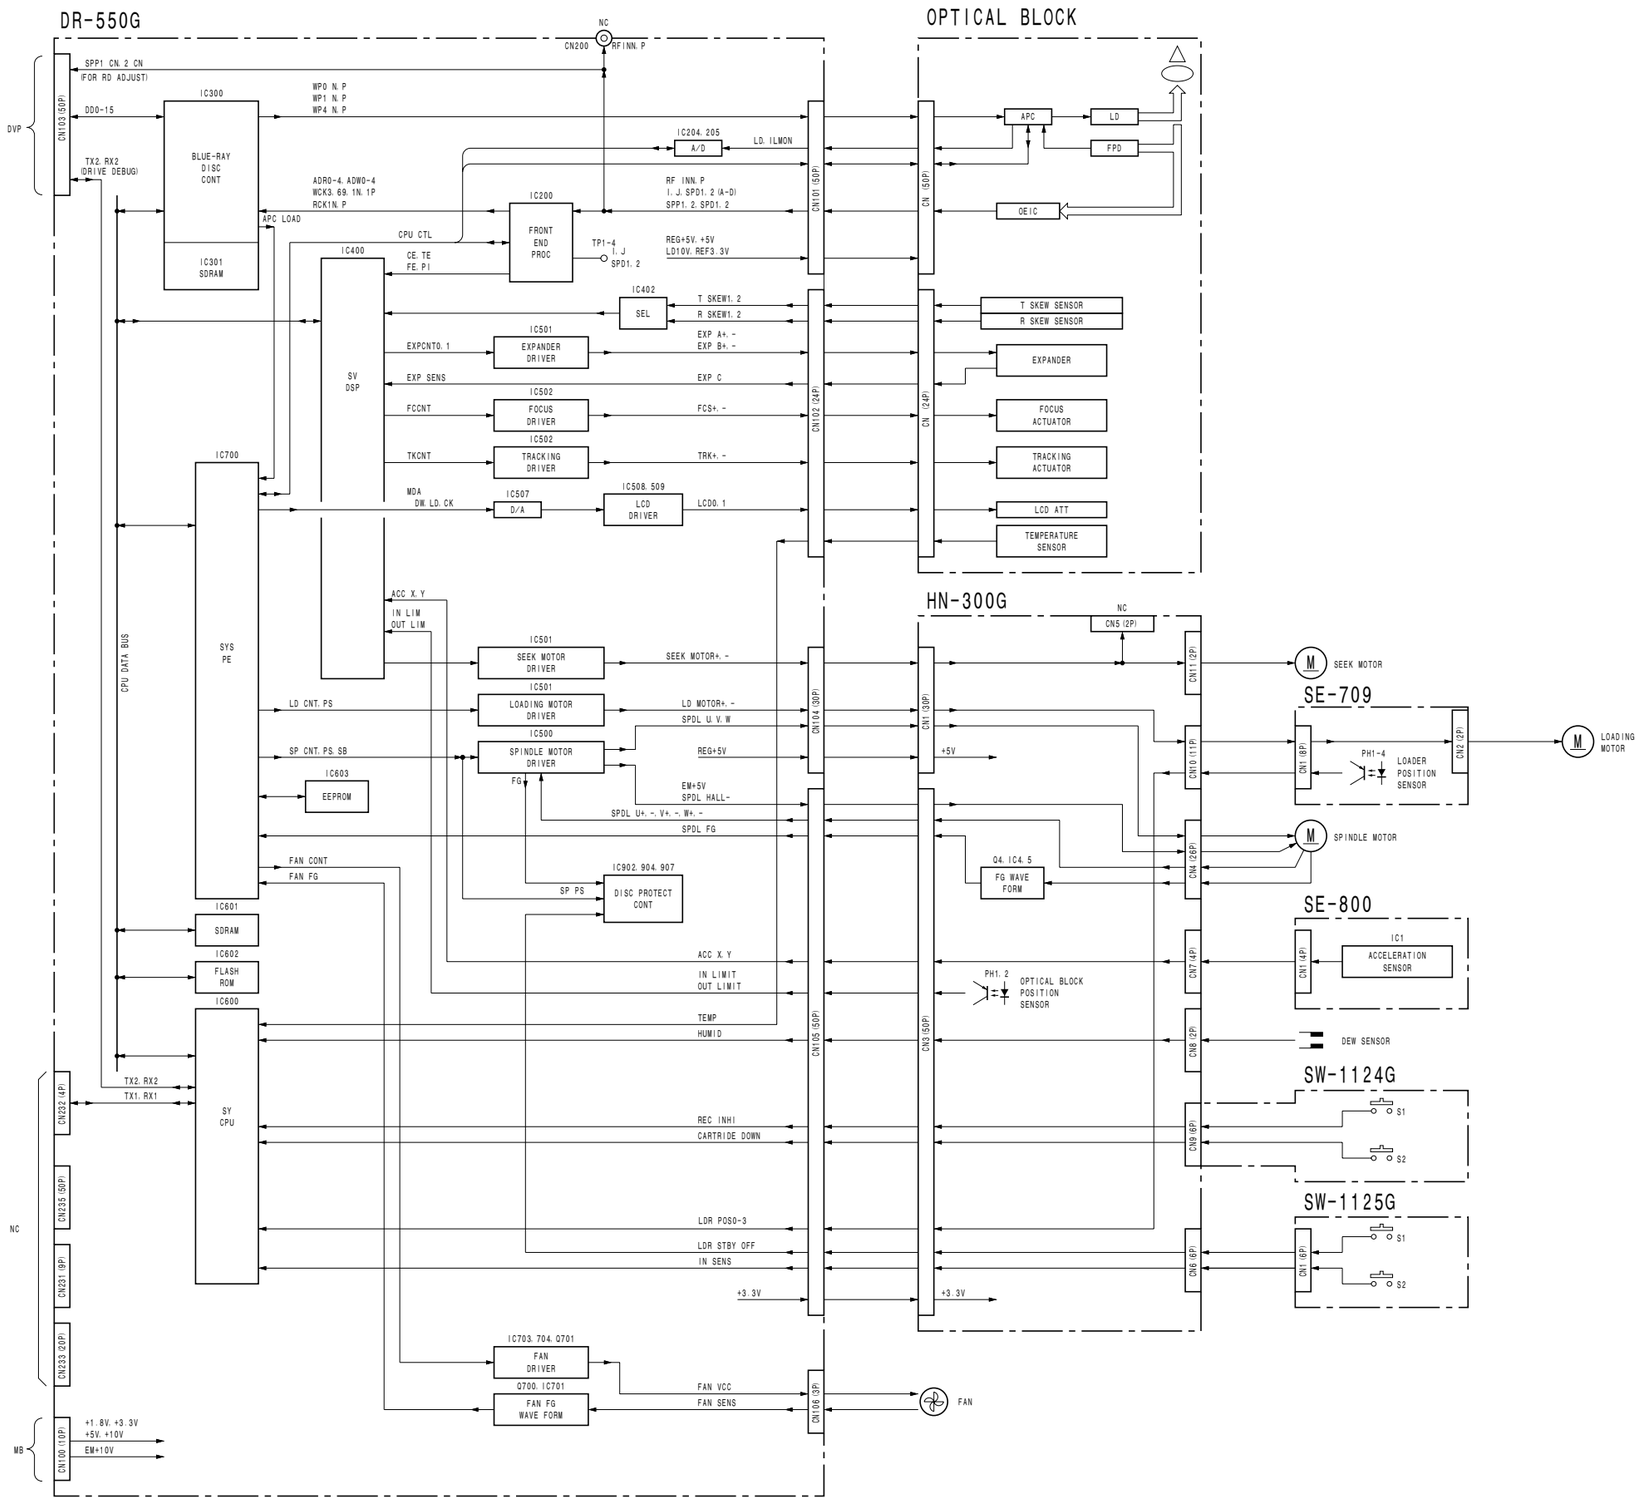

Disk drive processor
DR-550G

Mecha sensor connection
HN-300G

Loder position sensor
SE-709

Accelation sensor
SE-800

Cartrige sensor switch
SW-1124G

Cartrige sensor switch
SW-1125G

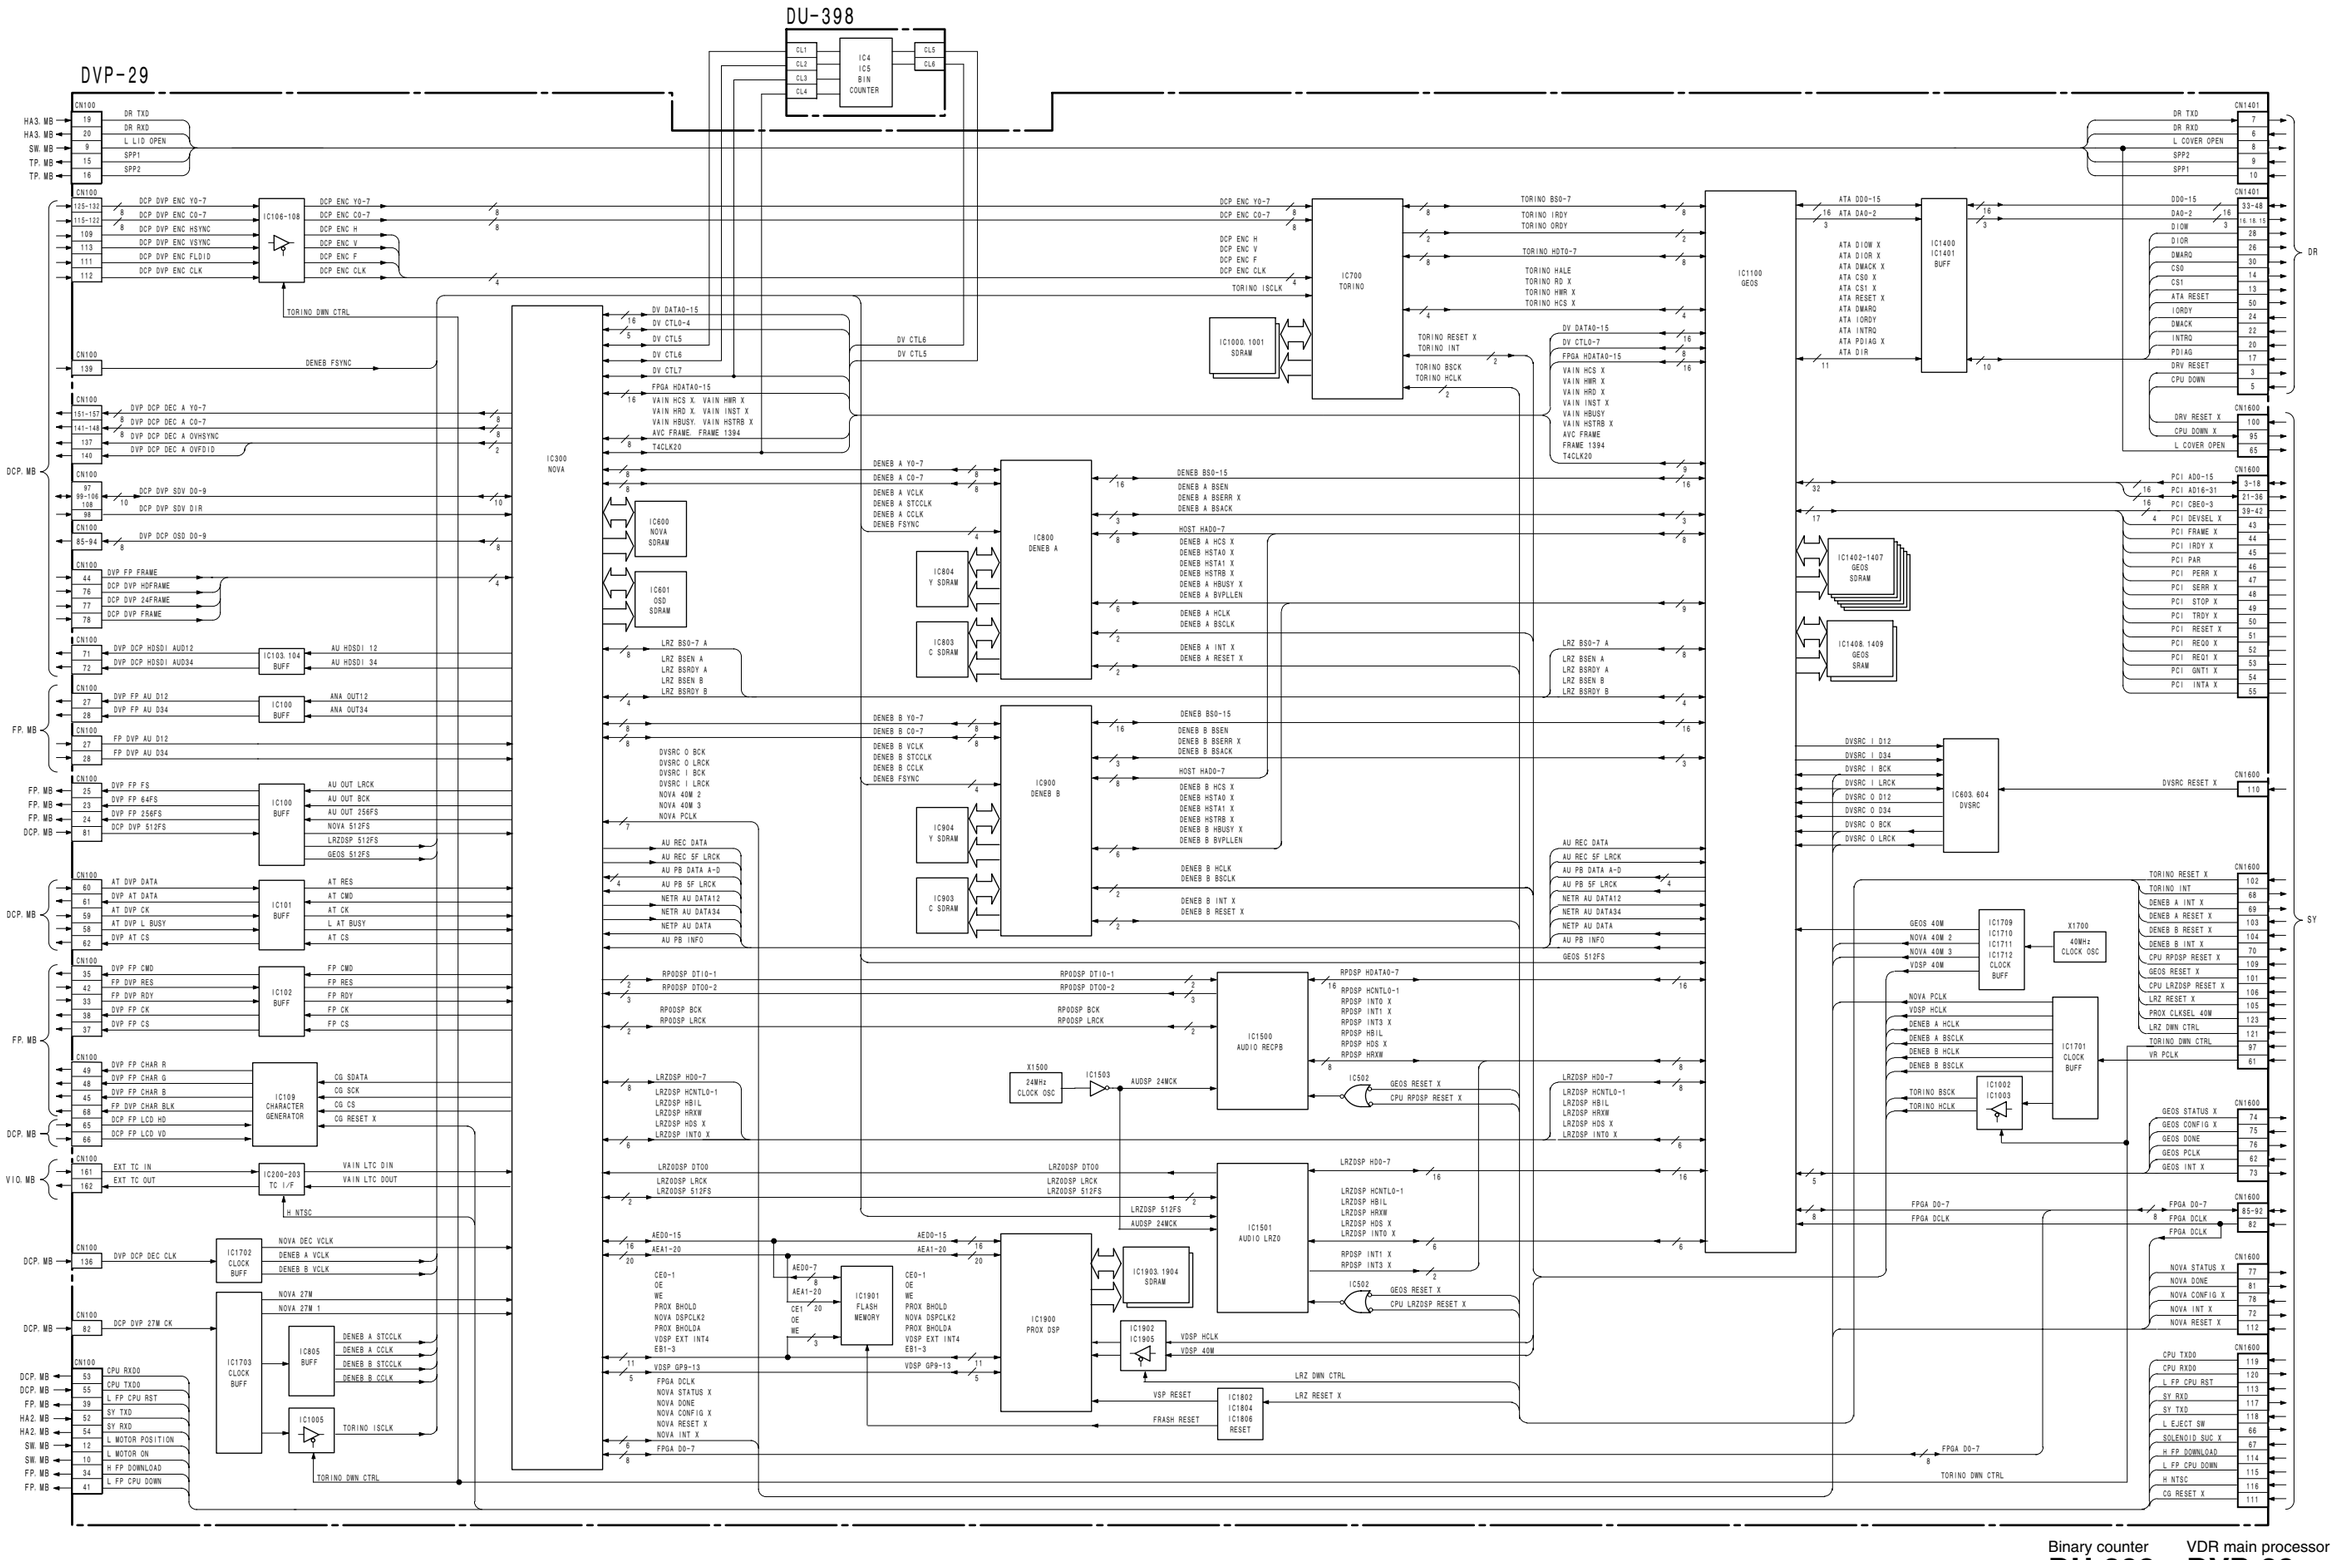

Binary counter VDR main processor

DU-398 DVP-29

AU-307, AU-307C, FP-144 (1/2), FP-144A (1/2), HP-124, JK-73, RX-96

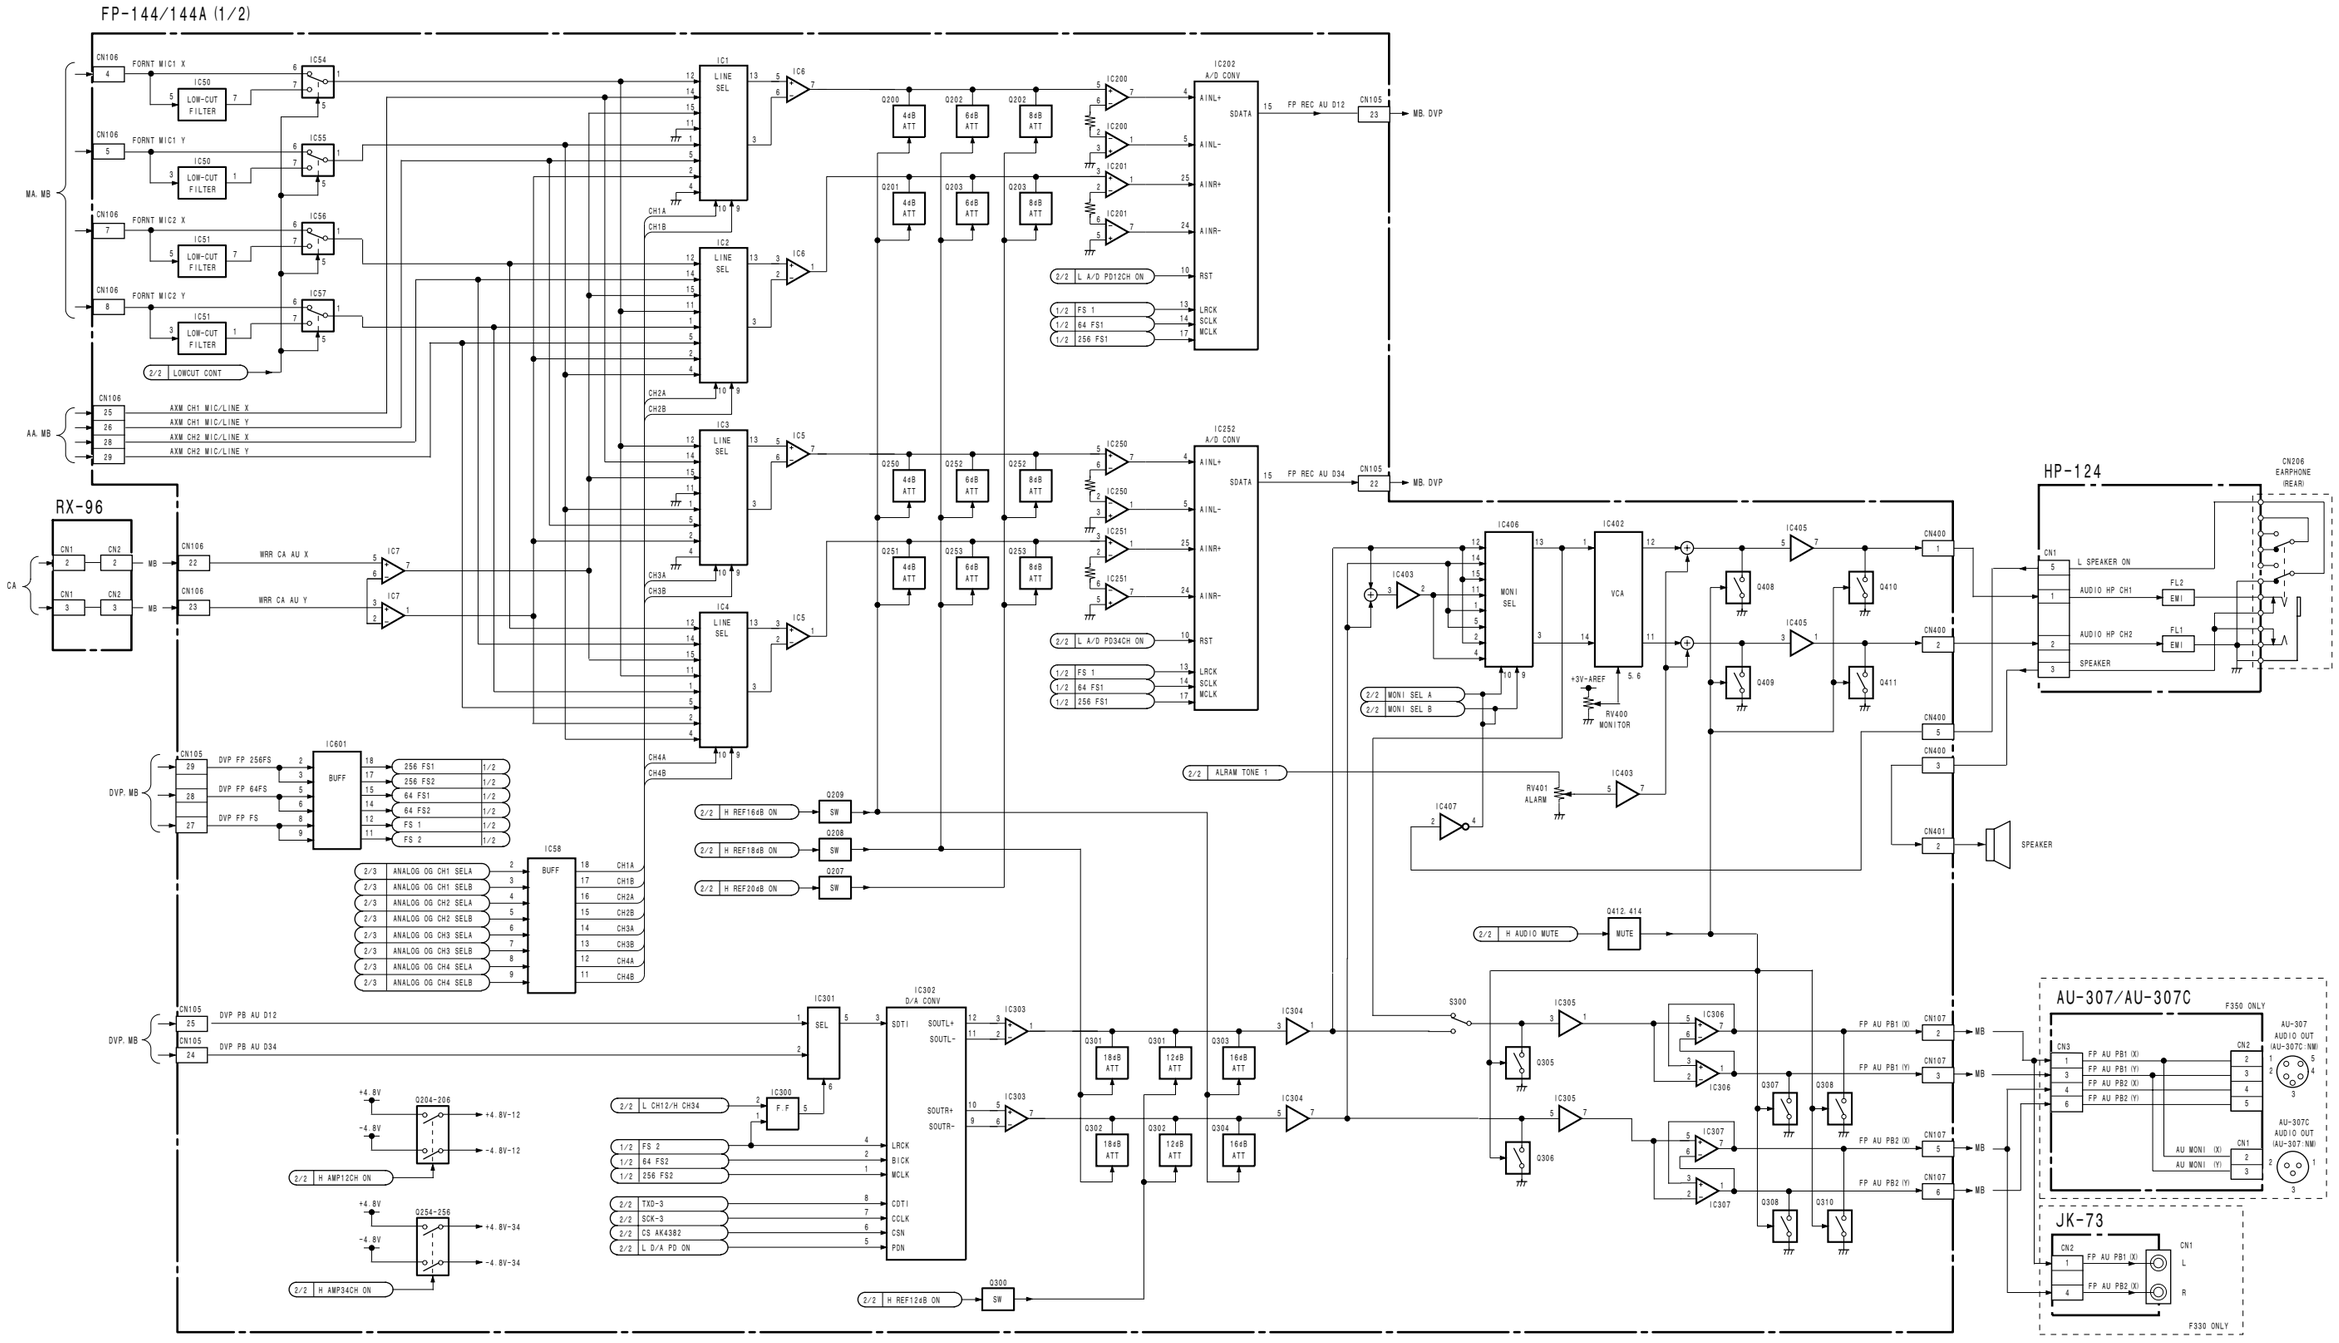

AUDIO OUT (XLR 5P) connector
AU-307

AUDIO OUT (XLR 3P) connector
AU-307C

Analog audio processor
FP-144 (1/2)

Analog audio processor
FP-144A (1/2)

Earphone jack
HP-124

CH-1/2 AUDIO OUT jack
JK-73

Wireless receiver interface
RX-96

3-14

DET-43G, DU-318, ENC-100, FP-144 (2/2), FP-144A (2/2), GCN-17, KY-573, KSW-51

FP-144/144A (2/2)

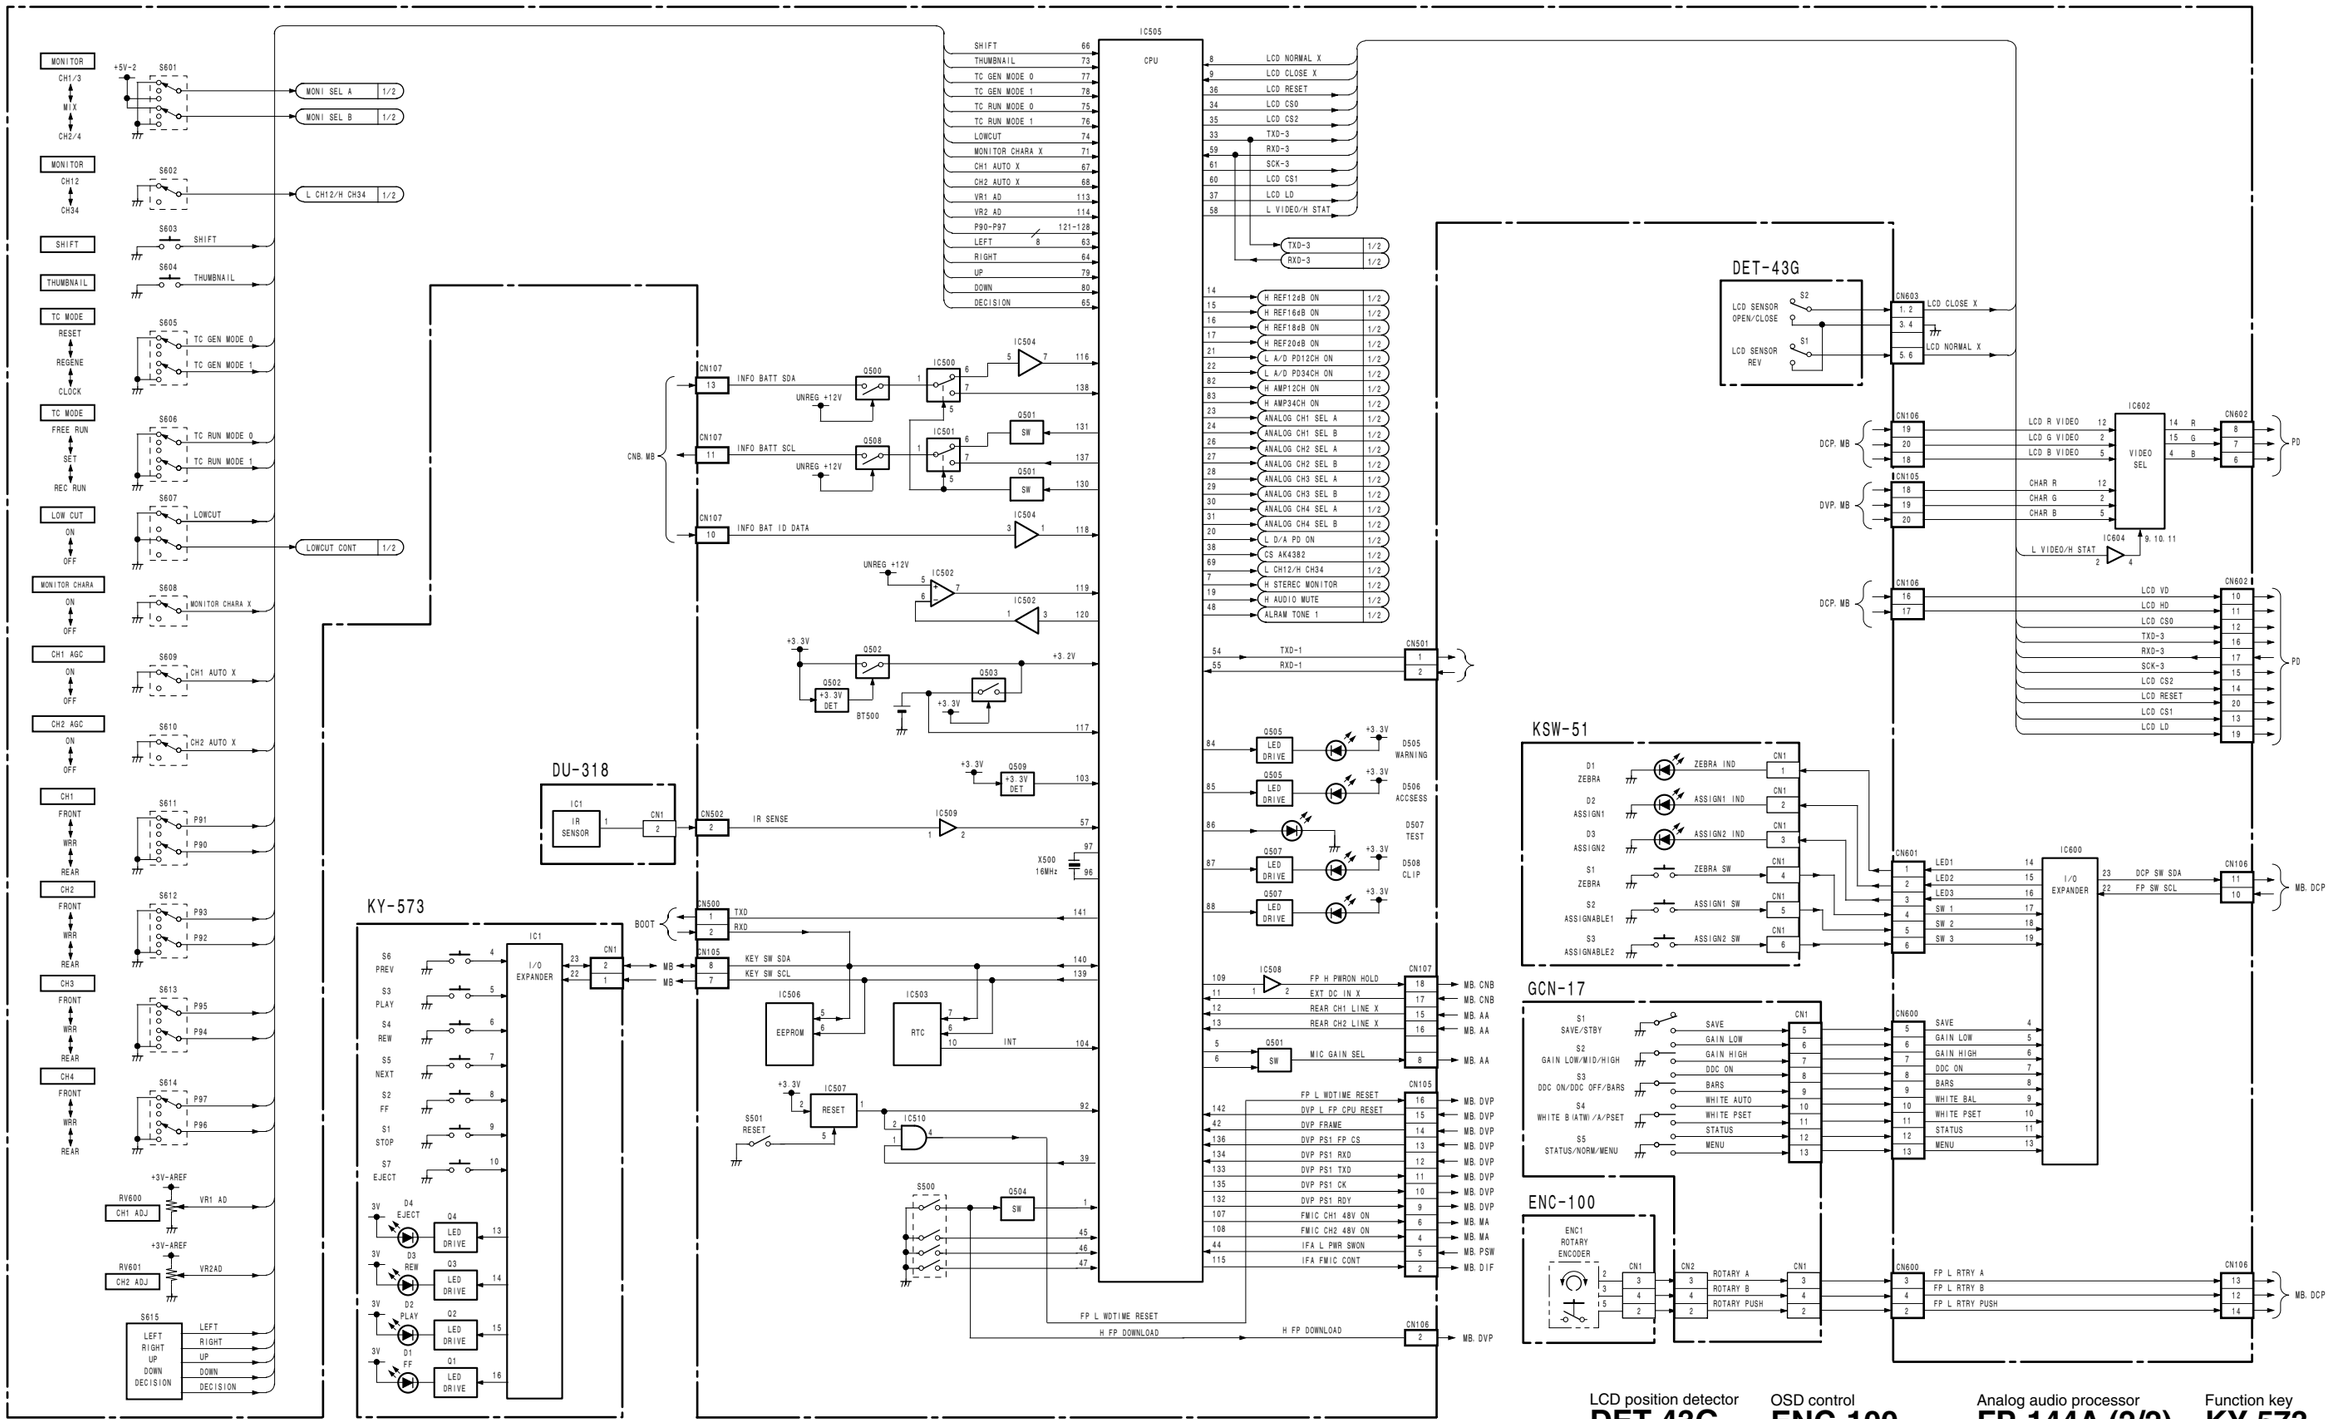

LCD position detector **DET-43G**

OSD control **ENC-100**

Analog audio processor **FP-144A (2/2)**

Function key **KY-573**

IR sensor **DU-318**

Analog audio processor **FP-144 (2/2)**

OUTPUT/GAIN switch **GCN-17**

Assignable switch **KSW-51**

PA-328, PA-329, PA-330, TG-249

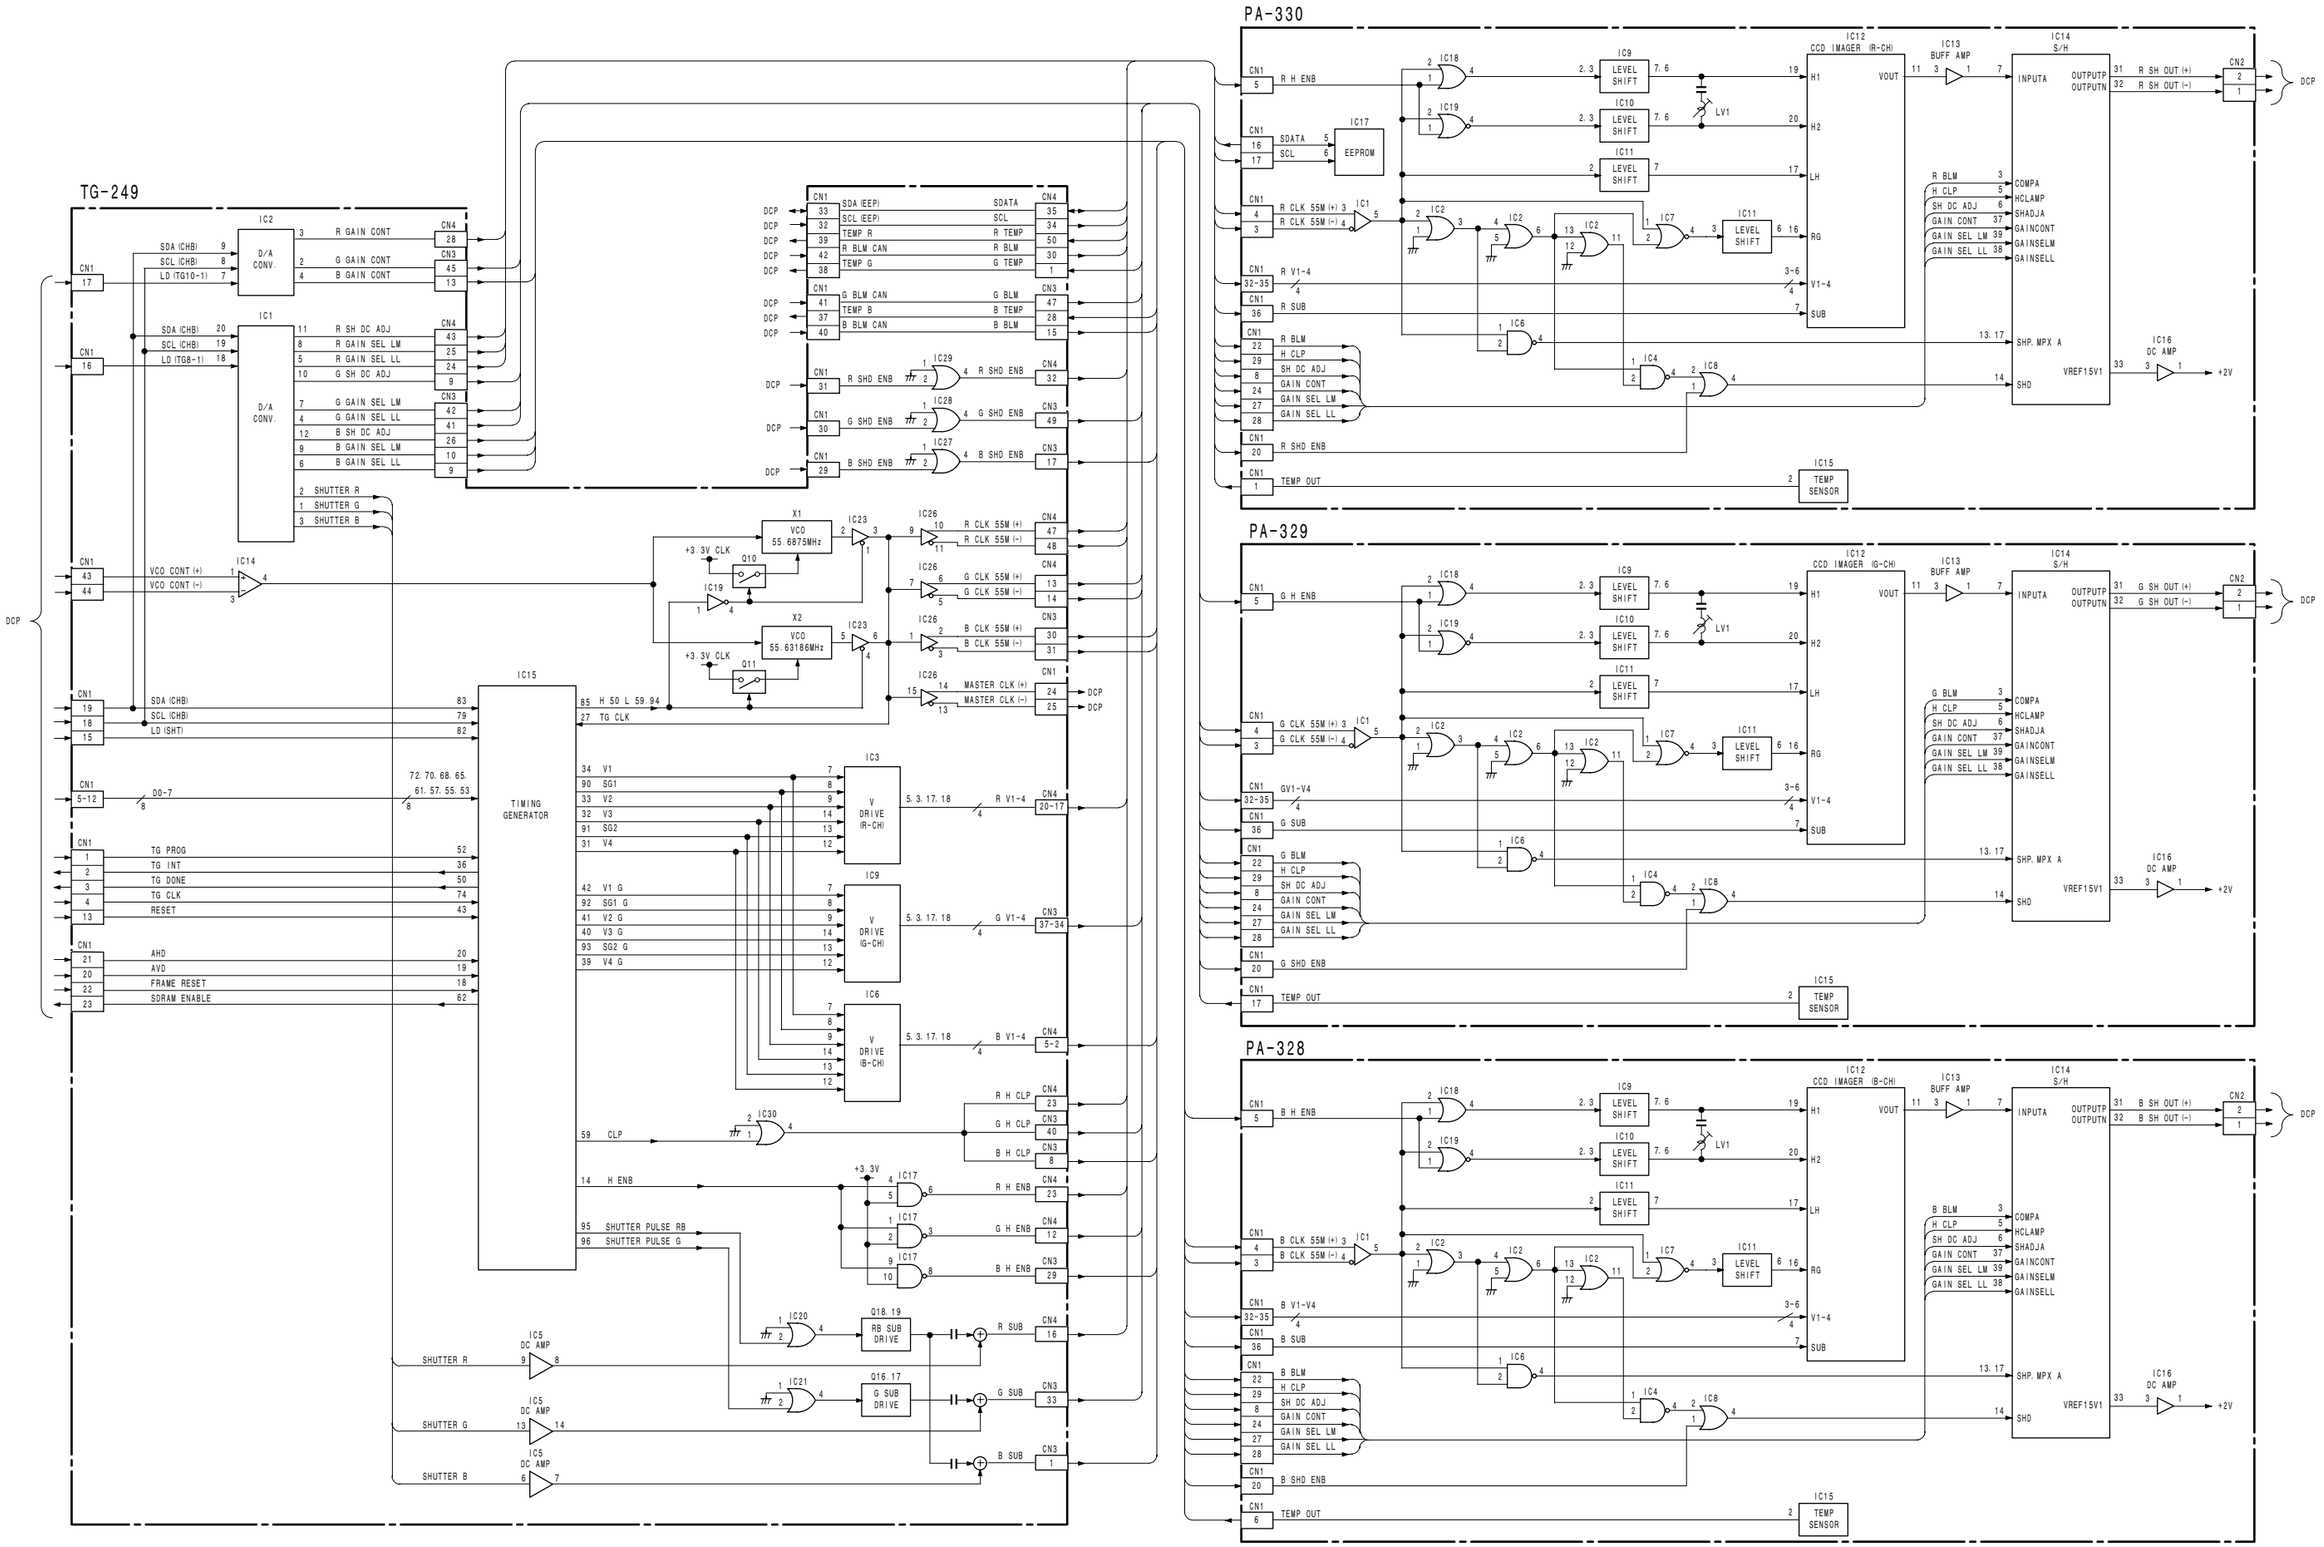

3-16

LGT-12, IO-228, PD-115, SW-1249, TC-110, VF-87, VIO-36, VO-36A

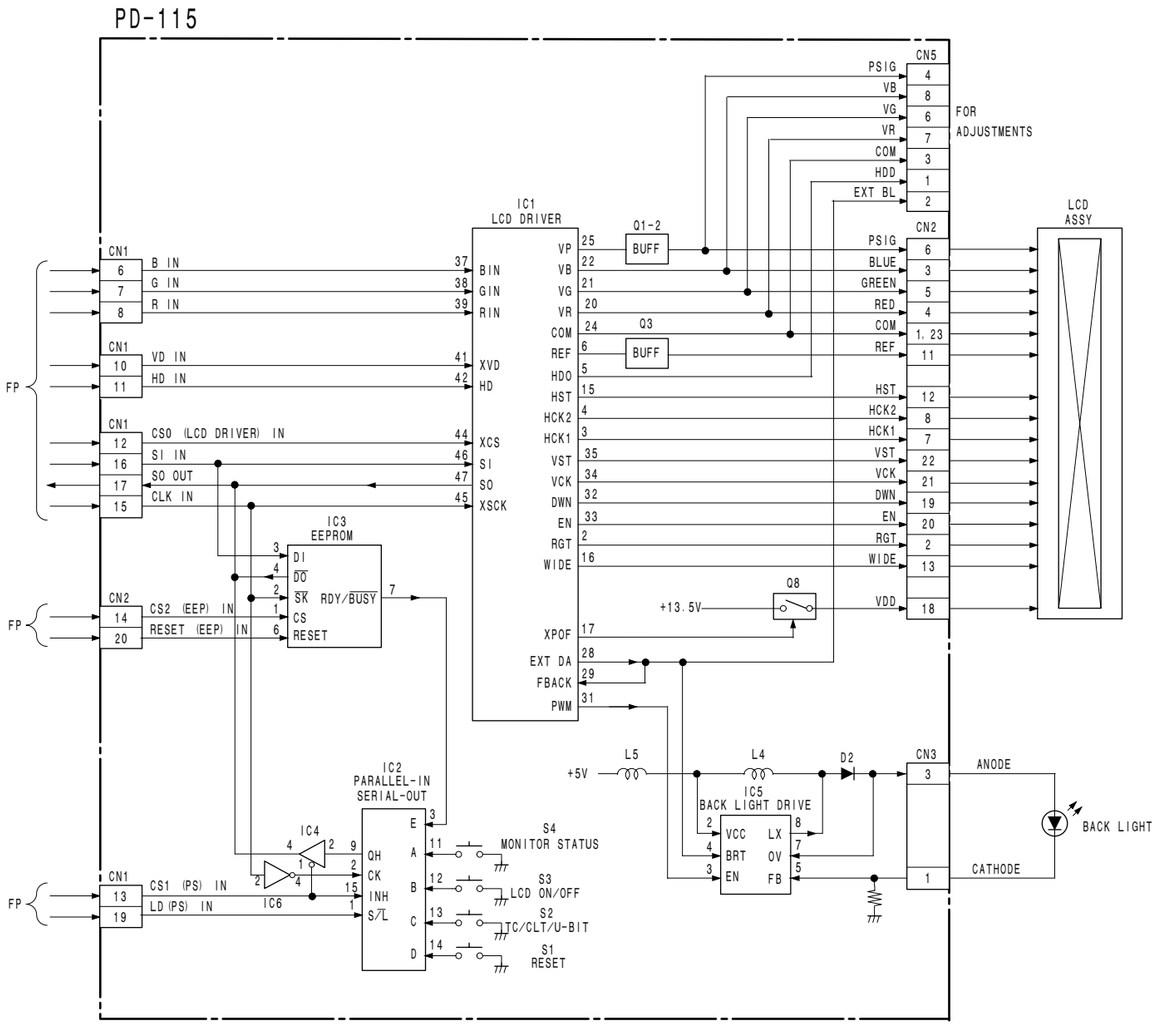

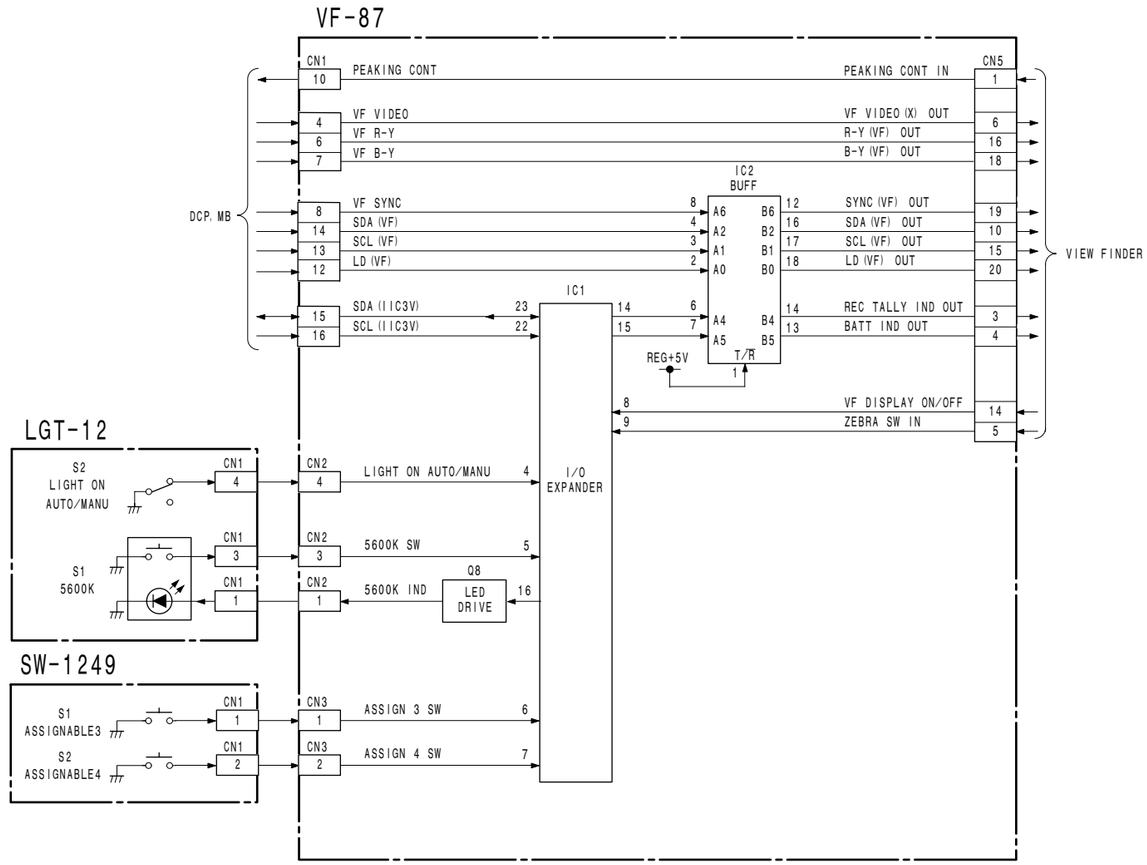

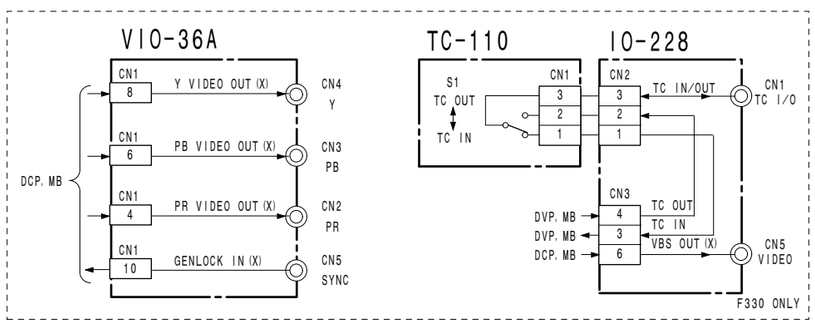

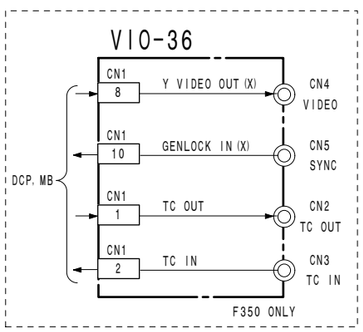

Light ON switch
LGT-12

TC IN/OUT switch
TC-110

TC IN/OUT, VIDEO OUT connector
IO-228

VF interface
VF-87

LCD driver
PD-115

VIDEO, SYNC, TC IN/OUT connector
VIO-36

Assignable switch
SW-1249

Y/B-Y/R-Y out, SYNC connector
VIO-36A

RE-236

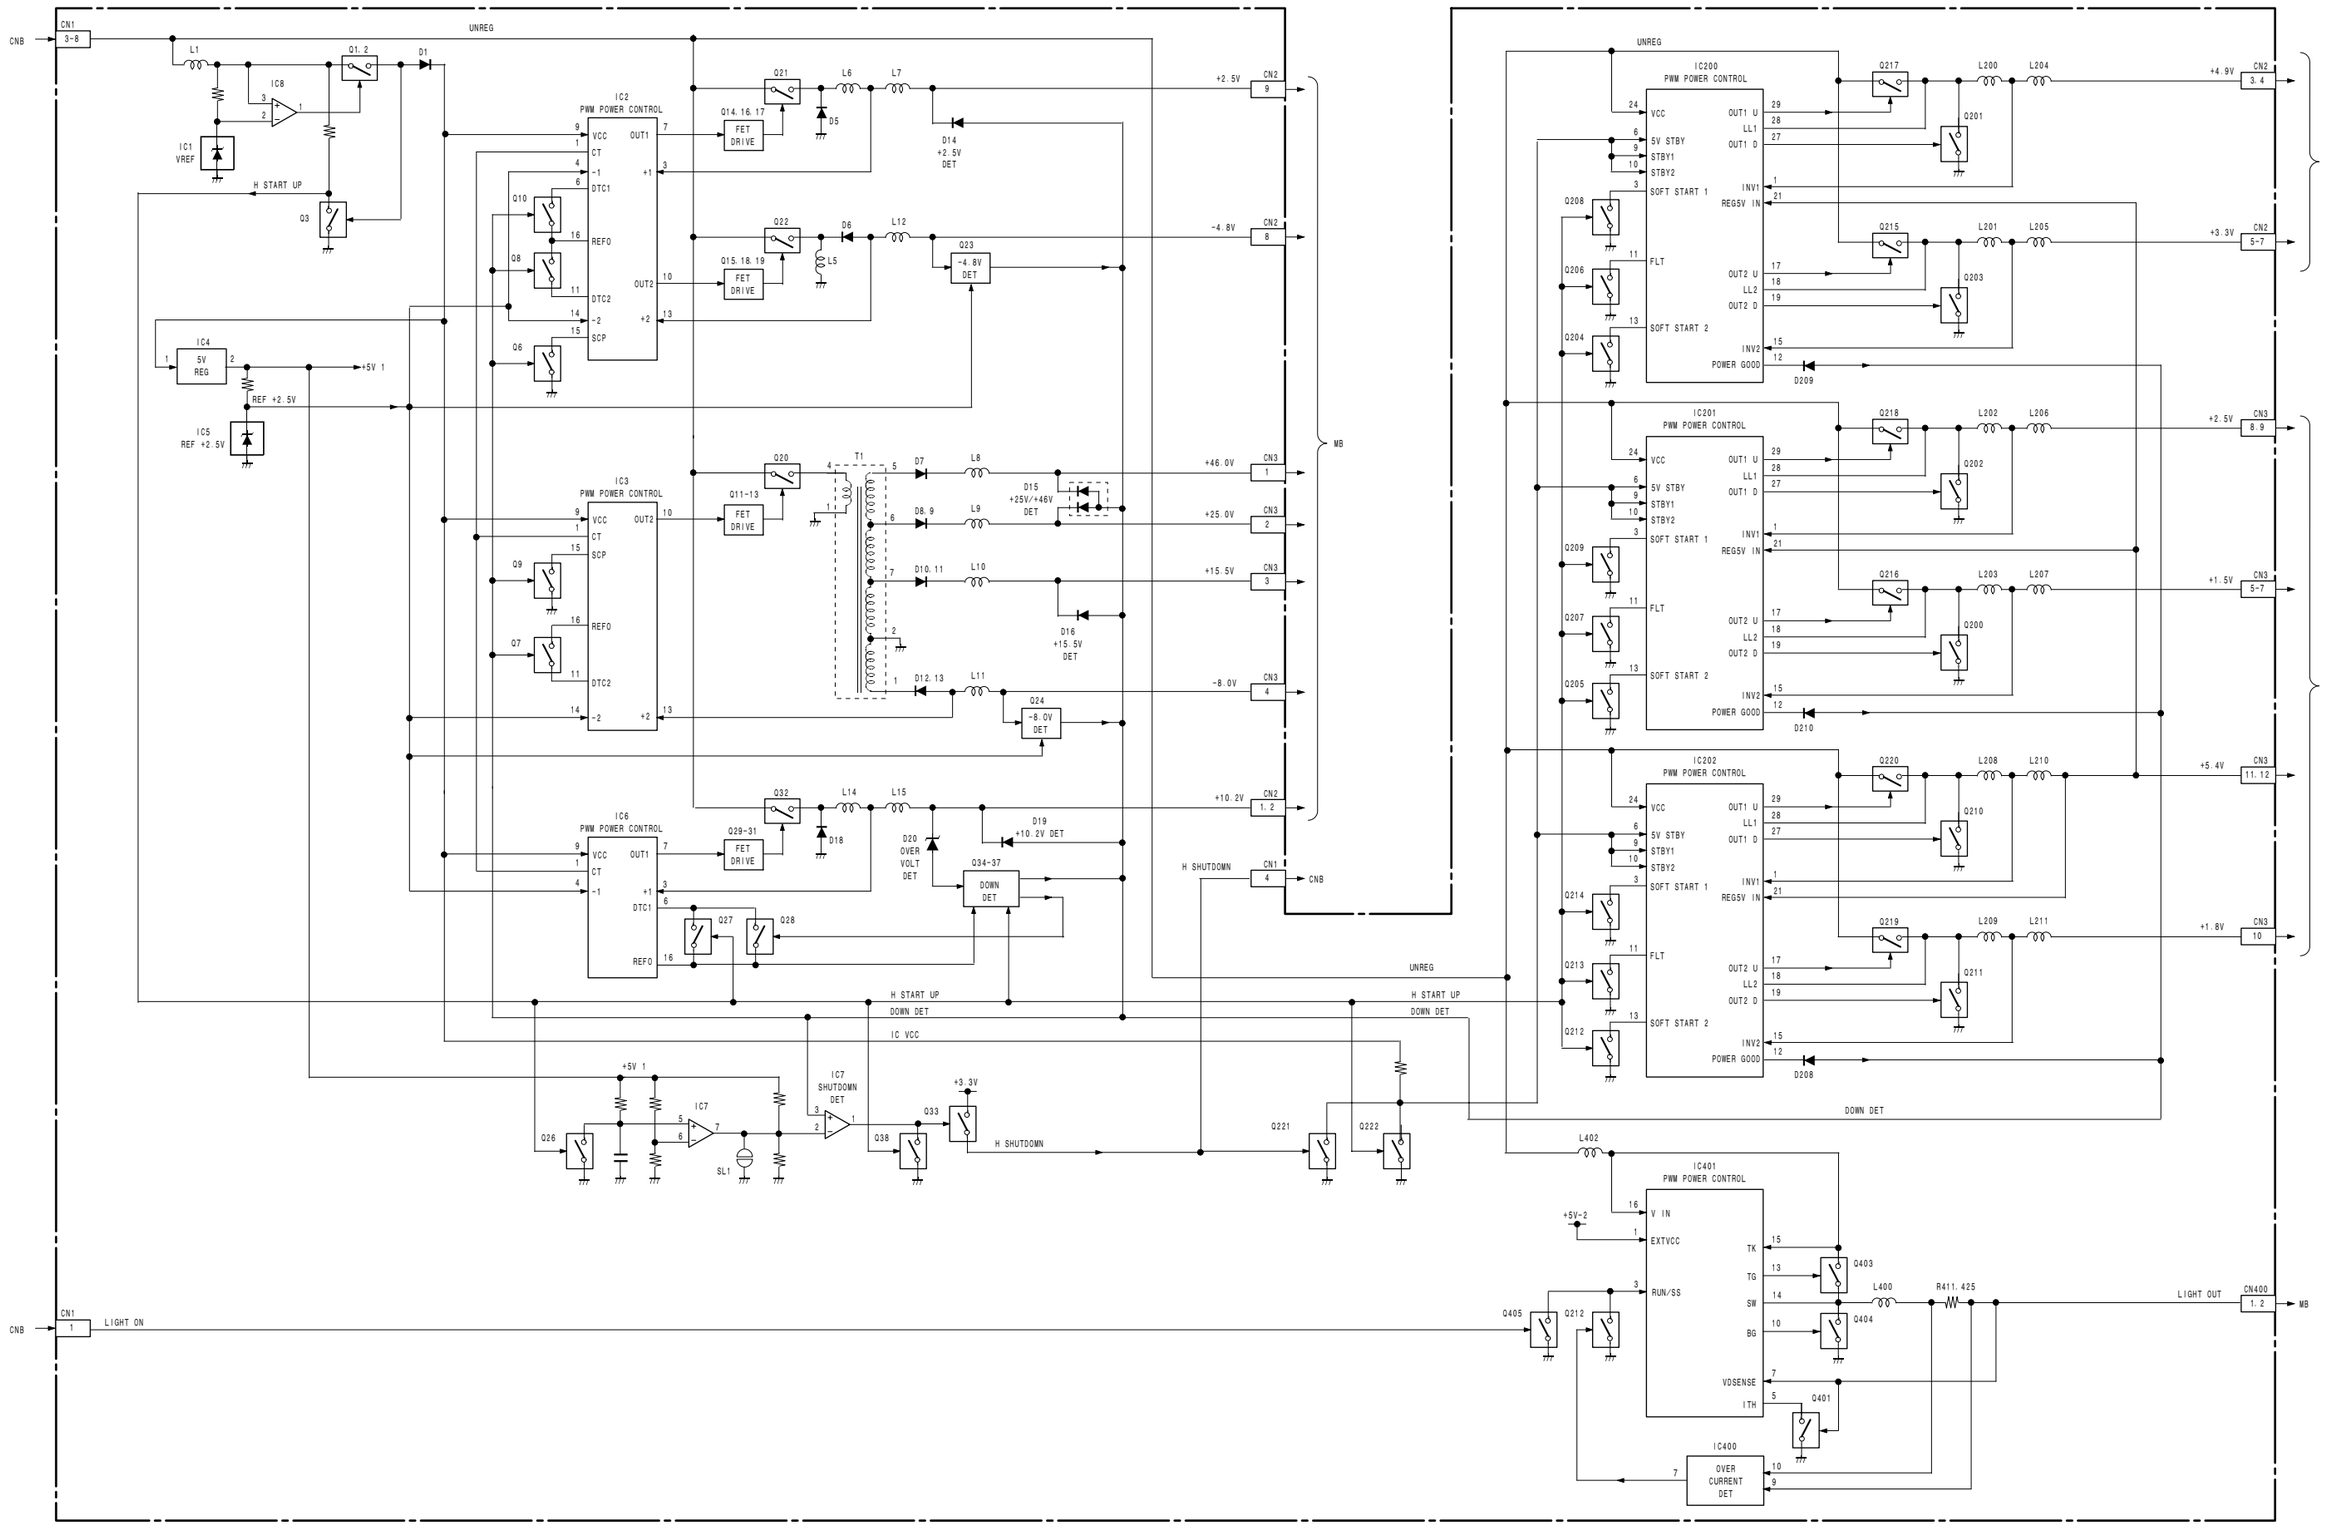
CNB
CN1
3-8
UNREG
L1
Q1. 2
D1
IC8
IC1
VREF
H START UP
Q3
IC2
PWM POWER CONTROL
VCC
CT
DTC1
REFO
DTC2
SCP
OUT1
OUT2
Q10
Q8
Q6
Q21
L6
L7
Q14. 16. 17
FET DRIVE
D5
D14
+2. 5V DET
+2. 5V
CN2
9
Q22
D6
L12
Q15. 18. 19
L5
Q23
-4. 8V DET
-4. 8V
CN2
8
IC4
5V REG
+5V 1
REF +2. 5V
IC5
REF +2. 5V
IC3
PWM POWER CONTROL
Q9
Q7
Q20
Q11-13
T1
D7
L8
D15
+25V/+46V DET
+46. 0V
CN3
1
D8. 9
L9
+25. 0V
CN3
2
D10. 11
L10
D16
+15. 5V DET
+15. 5V
CN3
3
D12. 13
L11
Q24
-8. 0V DET
-8. 0V
CN3
4
MB
IC6
PWM POWER CONTROL
Q29-31
FET DRIVE
Q32
L14
L15
D18
D20
OVER VOLT DET
D19
+10. 2V DET
+10. 2V
CN2
1. 2
Q34-37
DOWN DET
H SHUTDOWN
CN1
4
CNB
Q27
Q28
H START UP
DOWN DET
IC VCC
UNREG
IC7
SHUTDOWN DET
SL1
Q26
Q33
Q38
+3. 3V
H SHUTDOWN
Q221
Q222
IC200
PWM POWER CONTROL
Q208
Q206
Q204
Q217
L200
L204
Q201
+4. 9V
CN2
3. 4
Q215
L201
L205
Q203
+3. 3V
CN2
5-7
D209
IC201
PWM POWER CONTROL
Q209
Q207
Q205
Q218
L202
L206
Q202
+2. 5V
CN3
8. 9
Q216
L203
L207
Q200
+1. 5V
CN3
5-7
D210
IC202
PWM POWER CONTROL
Q214
Q213
Q212
Q220
L208
L210
Q210
+5. 4V
CN3
11. 12
Q219
L209
L211
Q211
+1. 8V
CN3
10
D208
DOWN DET
L402
IC401
PWM POWER CONTROL
+5V-2
V IN
EXTVCC
RUN/SS
TK
TG
SW
BG
VDSENSE
ITH
Q403
Q404
Q401
L400
R411. 425
LIGHT OUT
CN400
1. 2
MB
Q405
Q212
IC400
OVER CURRENT DET
CNB
CN1
1
LIGHT ON

SY-322

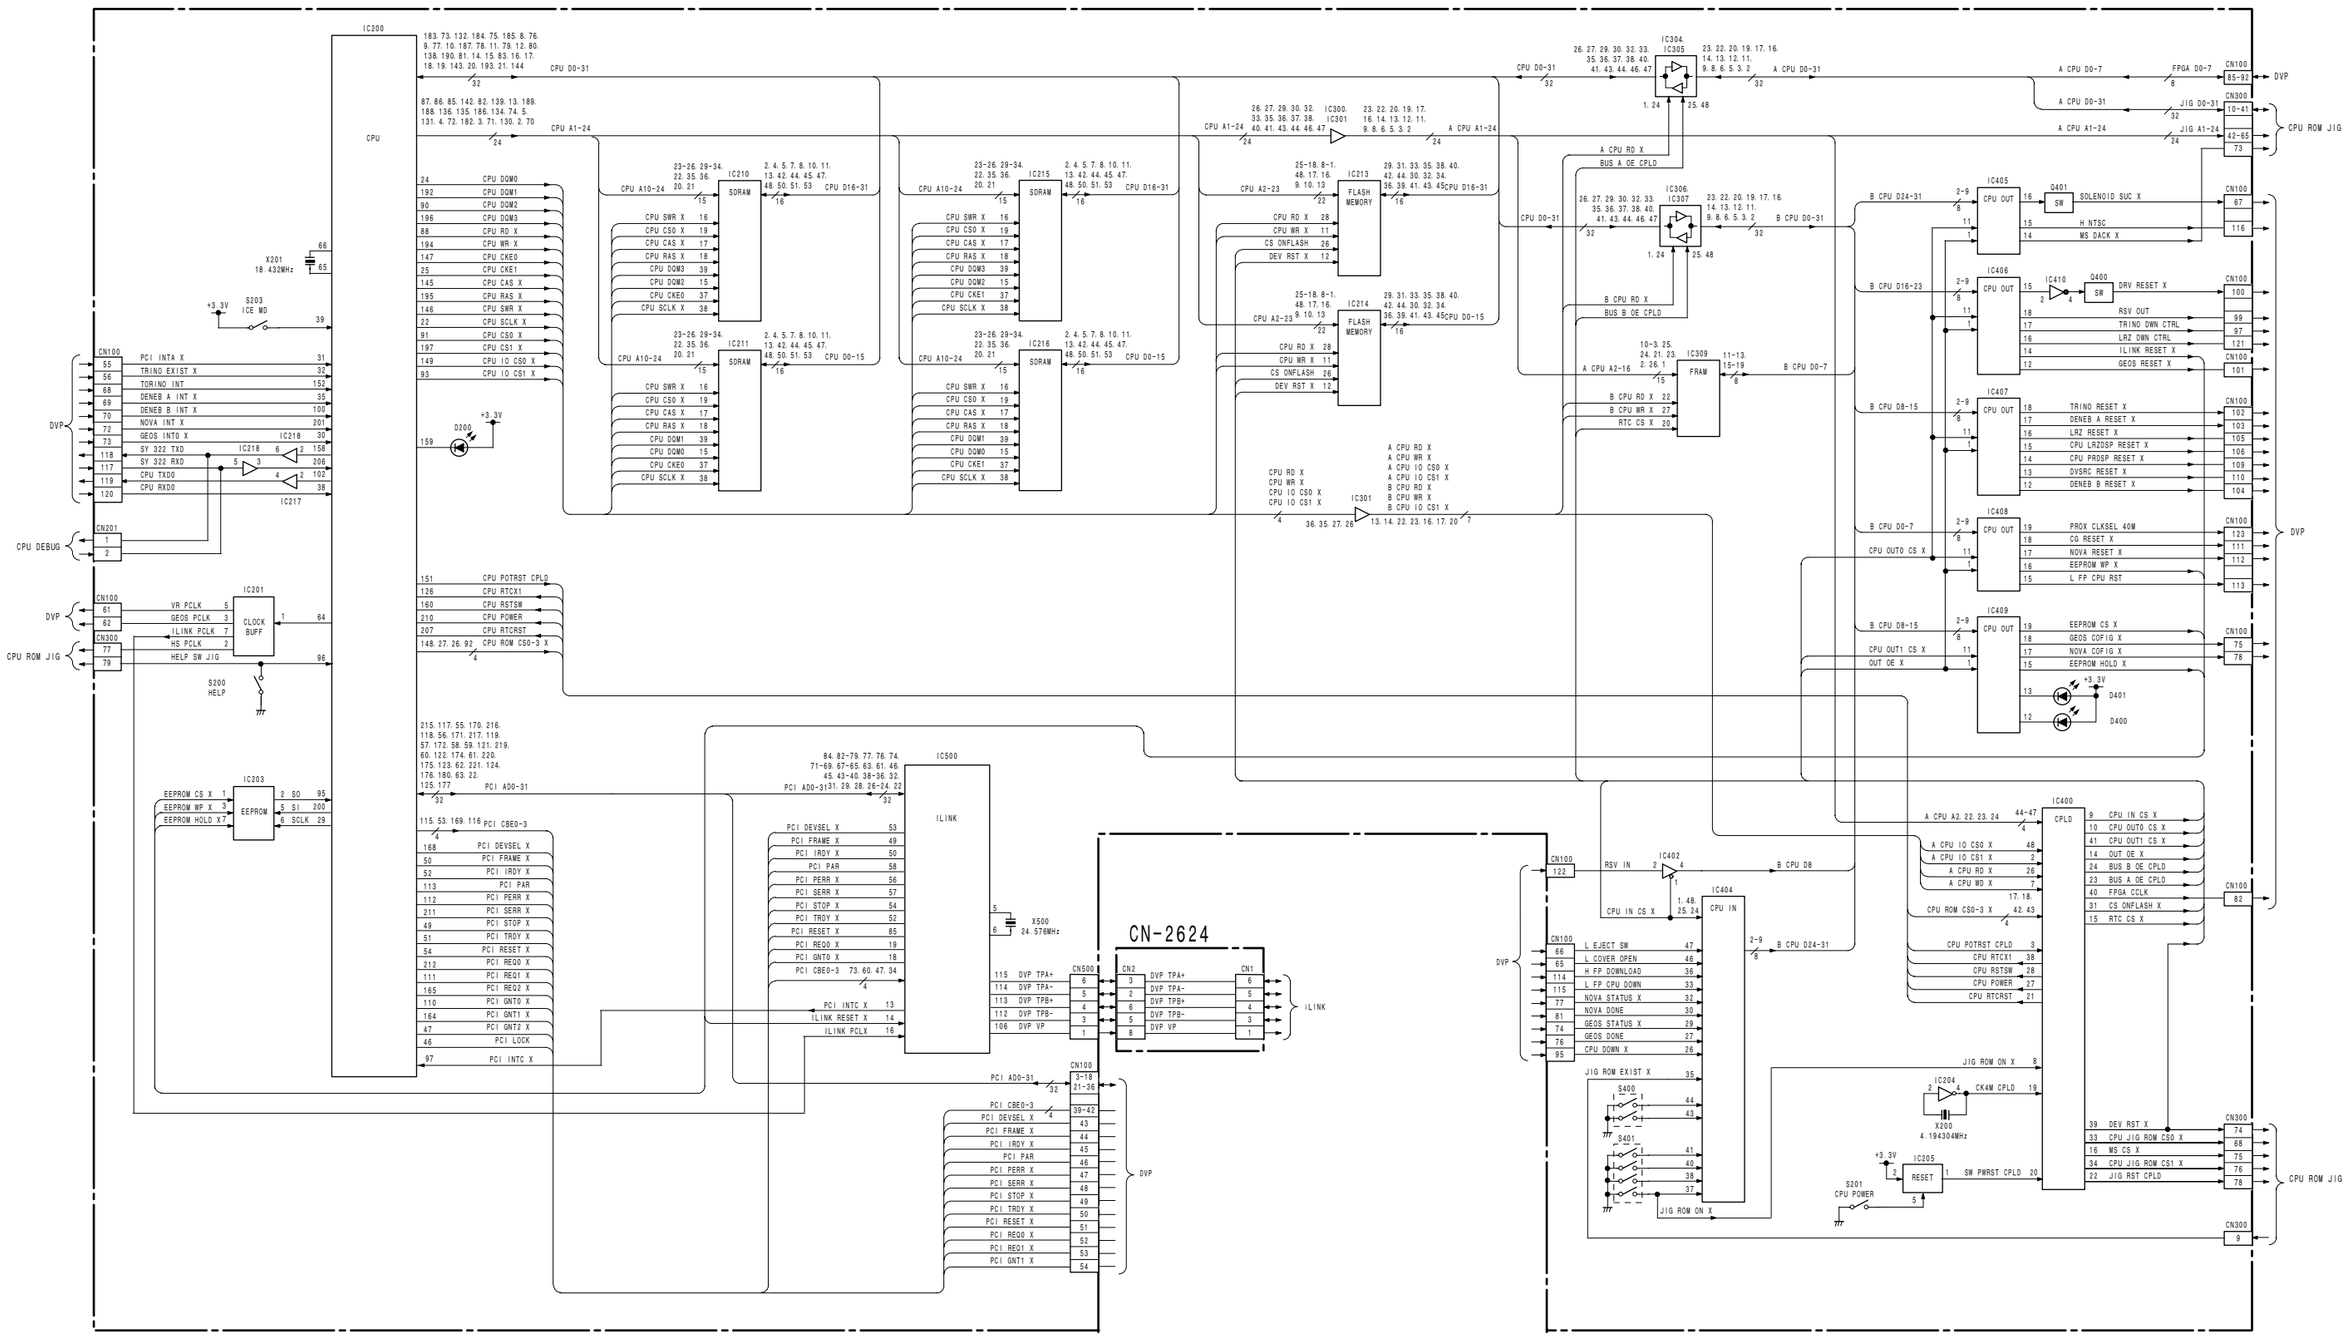

iLINK connector
CN-2624

Disk control processor
SY-322

TX-105

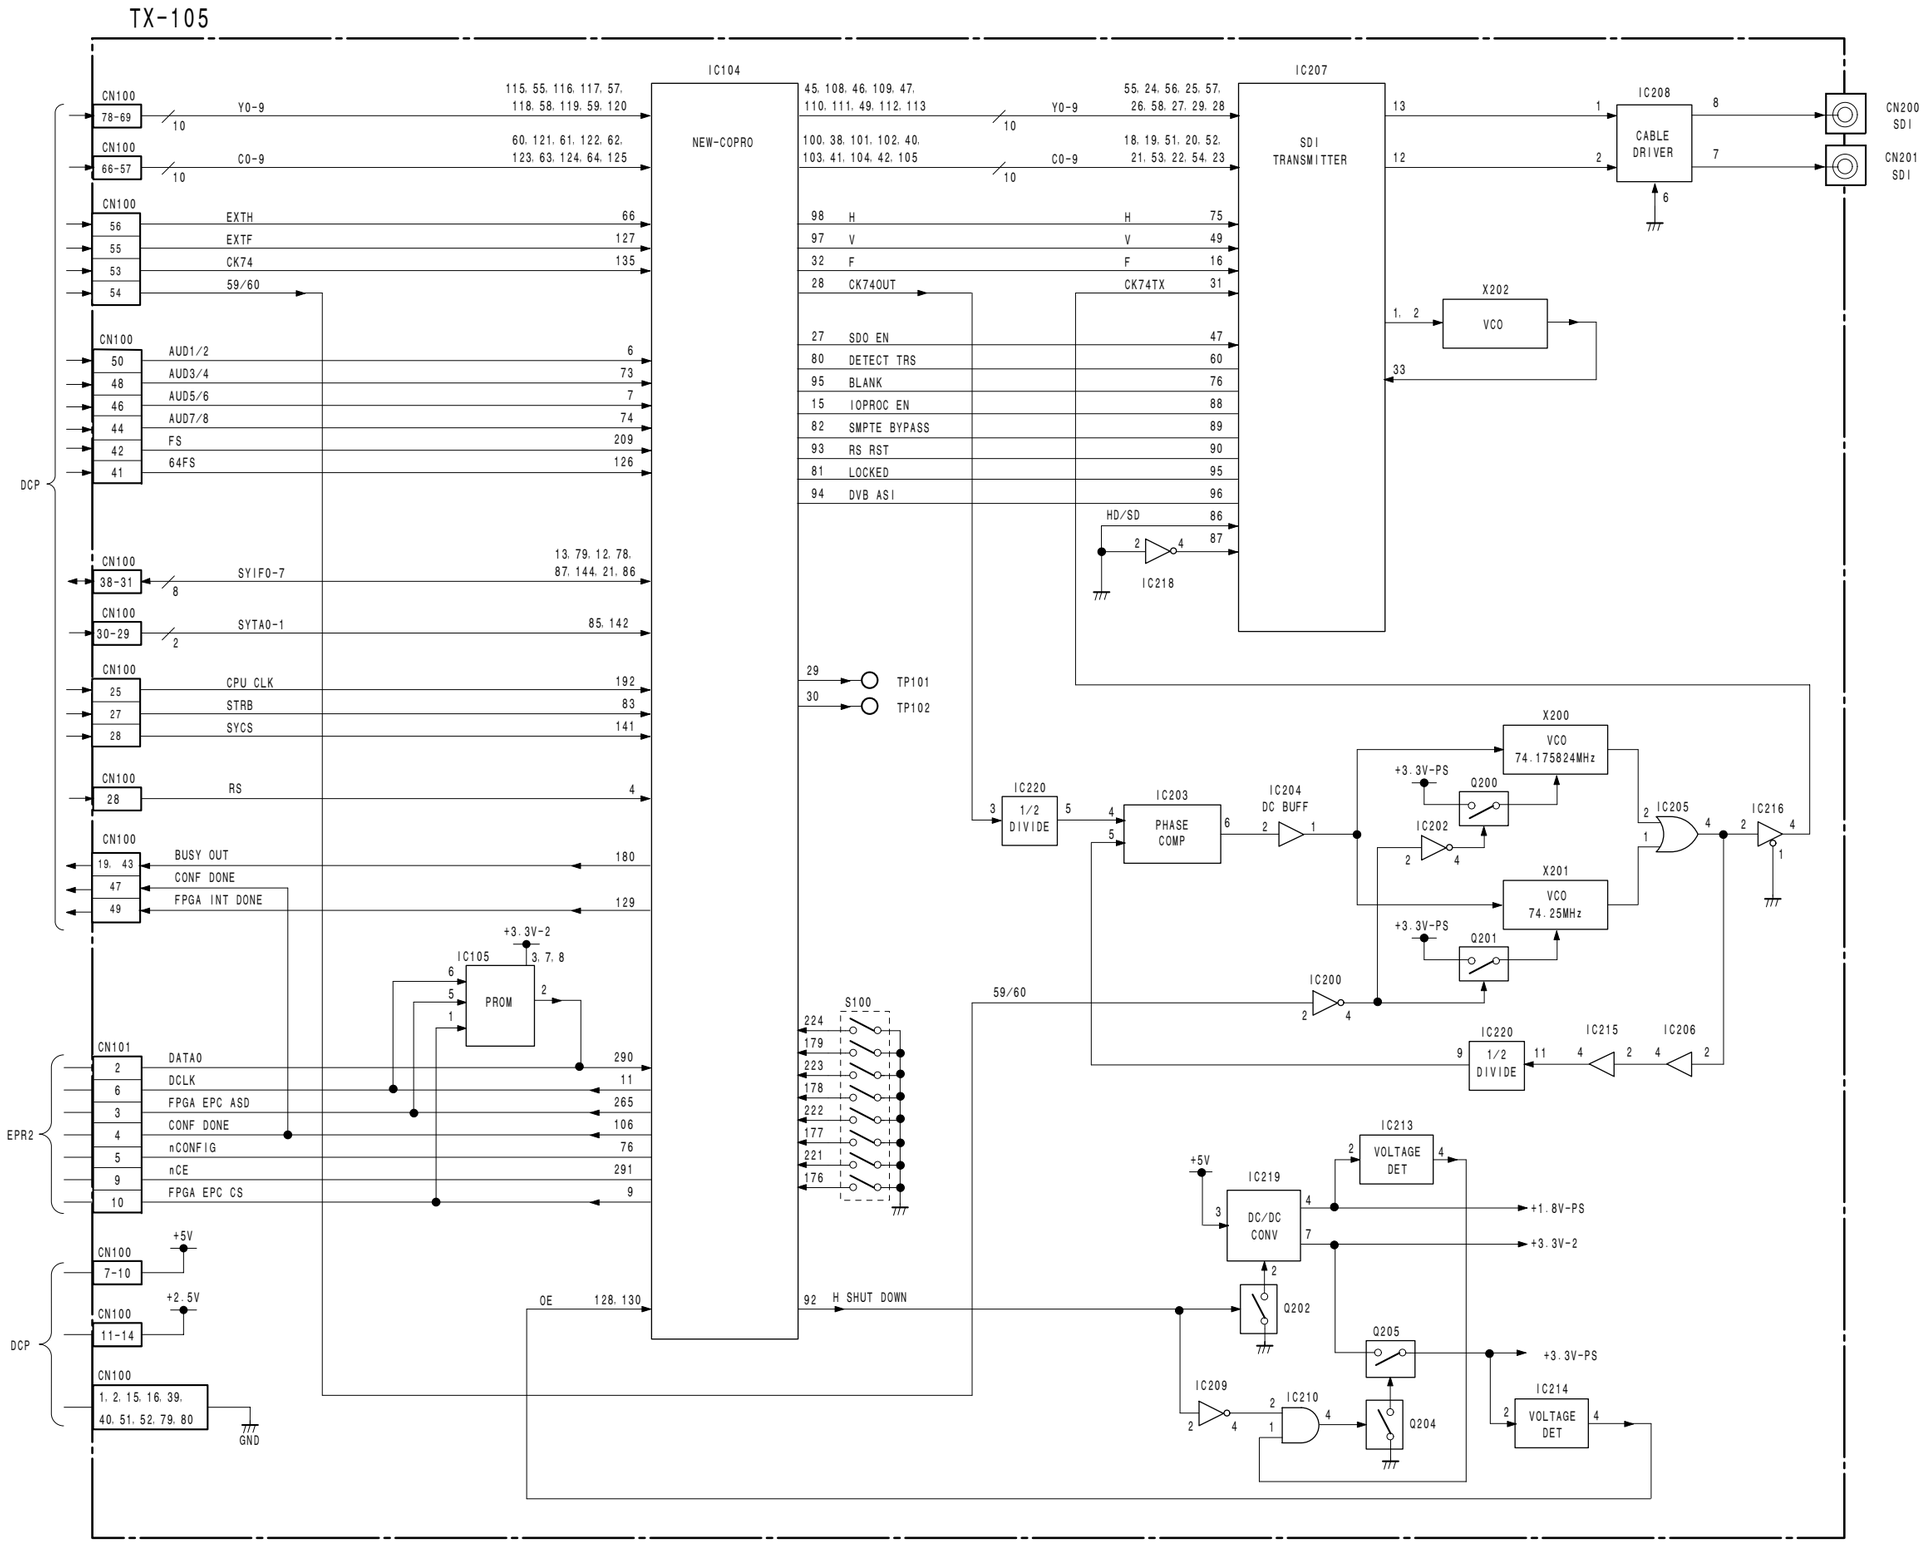

HD SDI OUT processor
TX-105

Section 4
Schematic Diagrams

Index

Board Name	Page
AA-112	4-3
AU-307	4-4
AU-307C	4-4
CN-2624	4-4
CN-2829	4-4
CNB-18	4-5
DCP-37	4-6
DCP-37A	4-24
DET-43G	4-151
DIF-167	4-42
DR-550G	4-43
DU-318	4-4
DU-398	4-87
DVP-29	4-50
ENC-100	4-87
FP-144	4-89
FP-144A	4-99
GCN-17	4-111
HN-300G	4-112
HP-124	4-113
IO-228	4-113
IR-36	4-113
JK-73	4-113
KSW-51	4-111
KY-573	4-114
LED-428	4-114
LGT-12	4-114
MA-136	4-115
MB-1028	4-116
MS-71	4-124
PA-328	4-118
PA-329	4-120
PA-330	4-122
PD-115	4-125
PS-708	4-124
PSW-85	4-124
RE-236	4-127
RM-203	4-133
RX-96	4-133
SE-709	4-133

Board Name	Page
SE-743	4-133
SE-800	4-134
SW-1124	4-134
SW-1125G	4-134
SW-1246	4-135
SW-1249	4-135
SY-322	4-136
TC-110	4-135
TG-249	4-146
VF-87	4-145
VIO-36	4-150
VIO-36A	4-150
VR-312	4-150
Frame Wiring	4-151

4-1

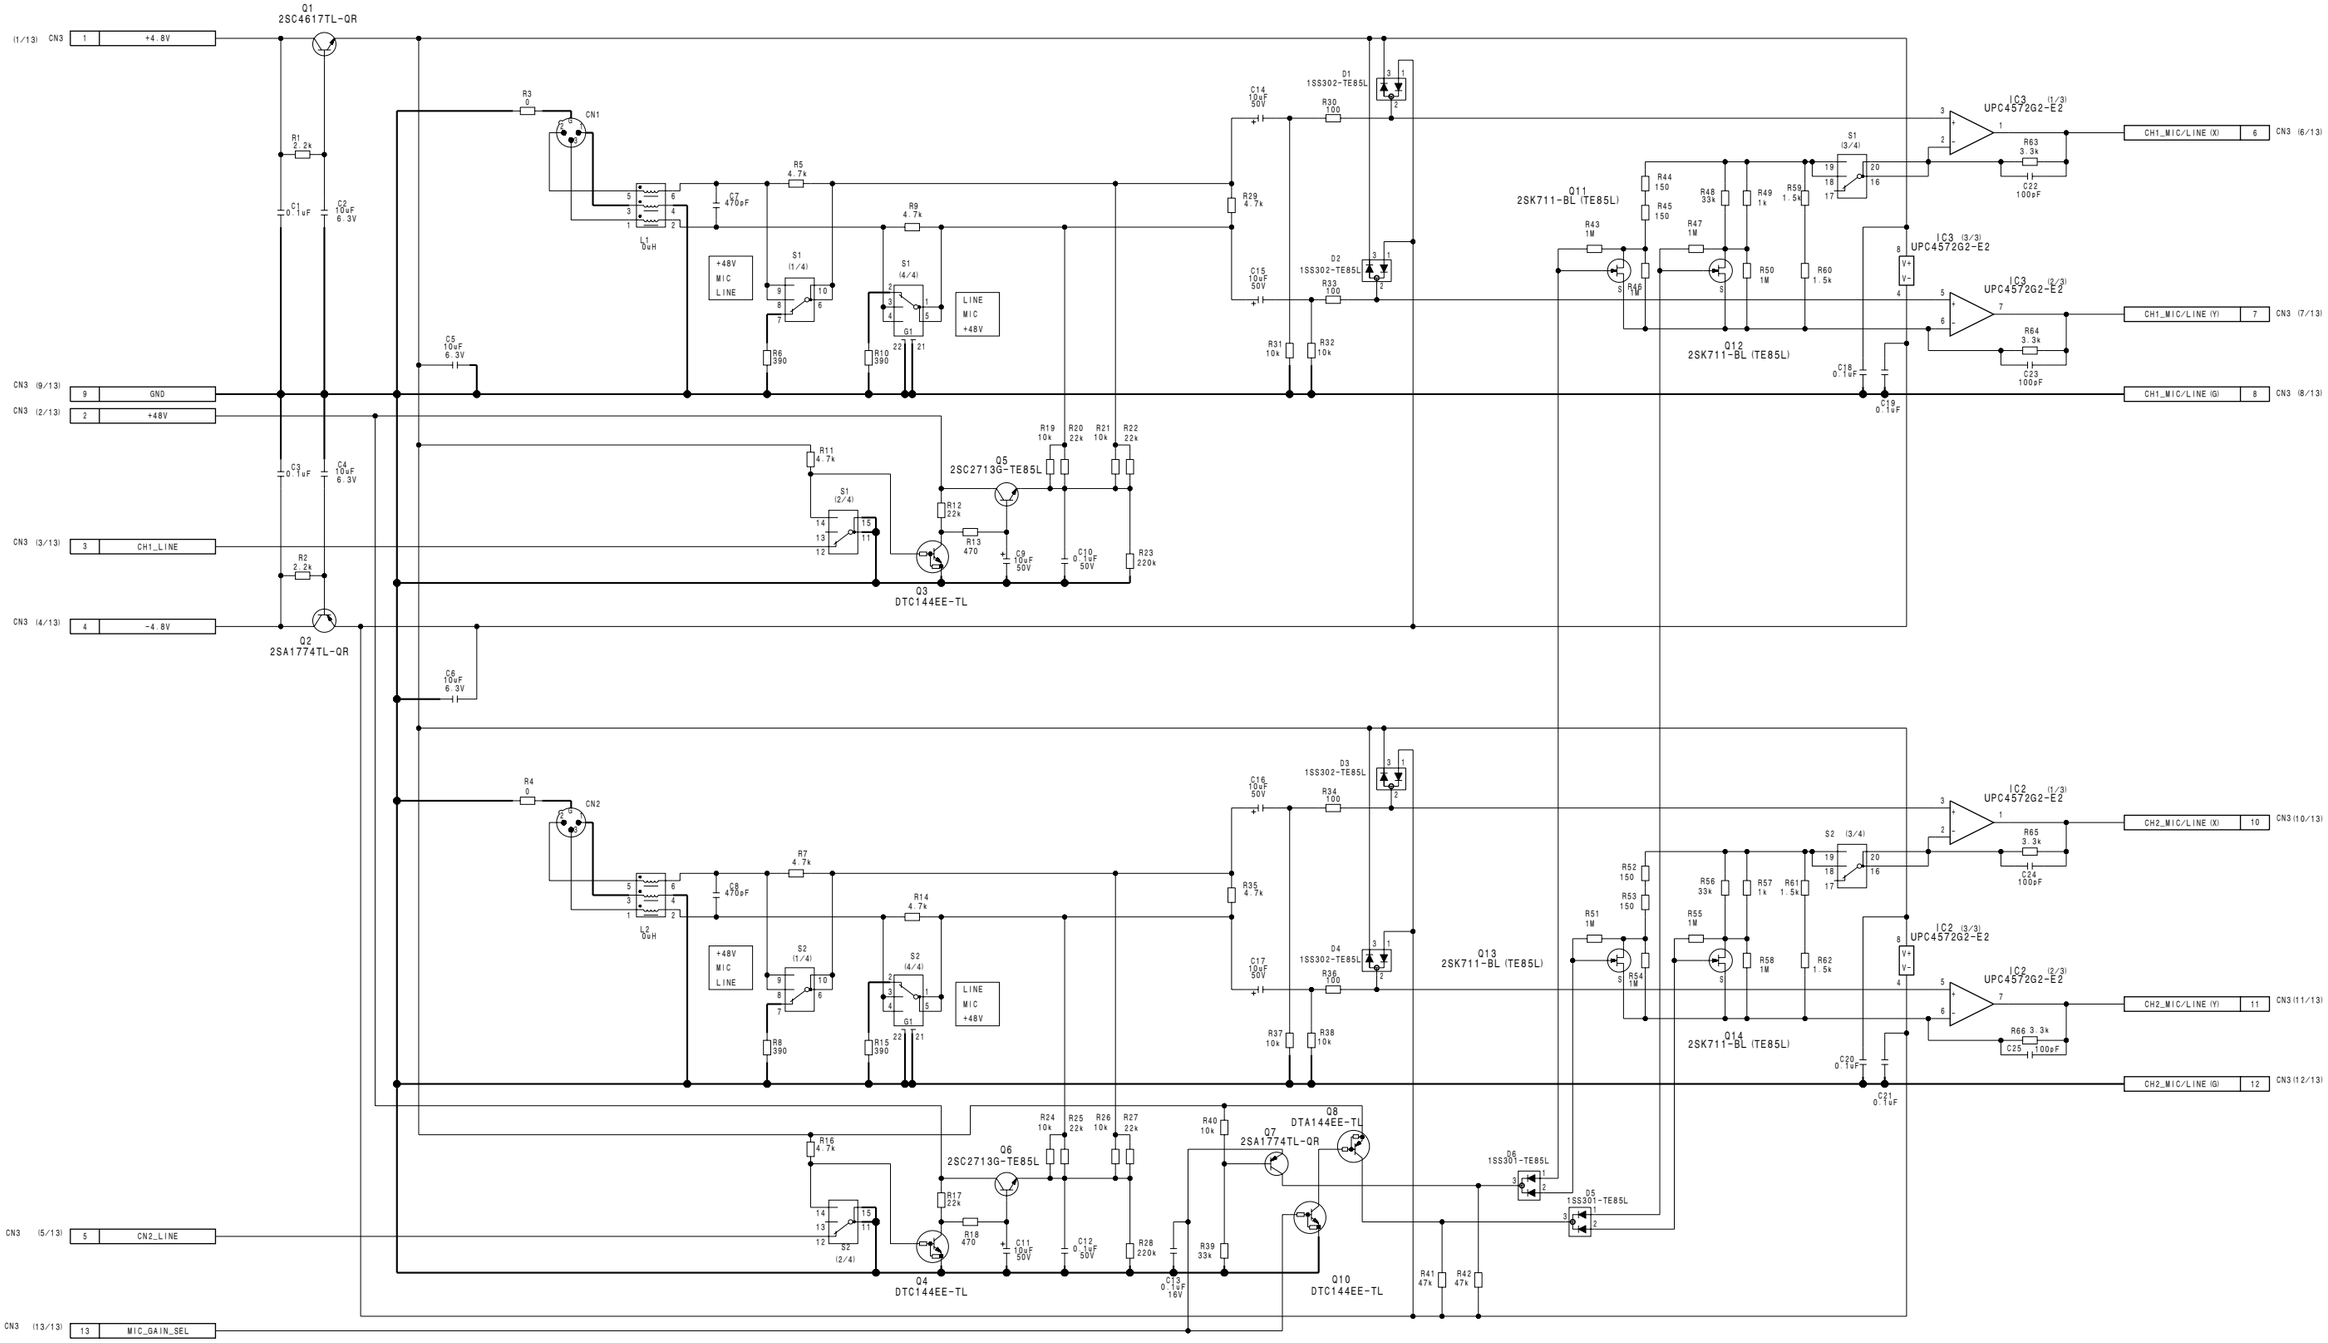

AA-112
BOARD NO. 1-869-500-11
PDW-F330K_AA-112_110_1

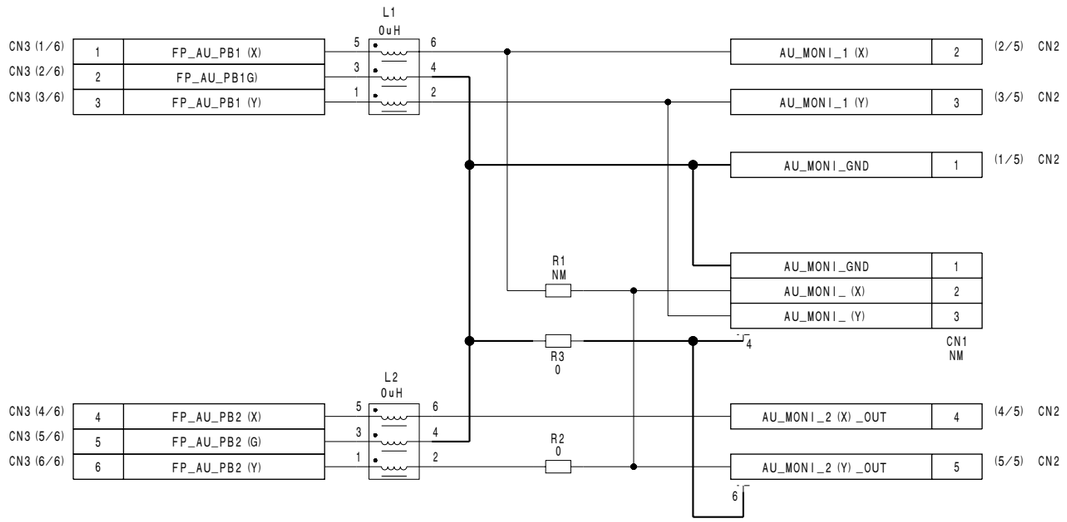

AU-307

BOARD NO. 1-869-503-11
PDW-F330K_AU-307_111_1

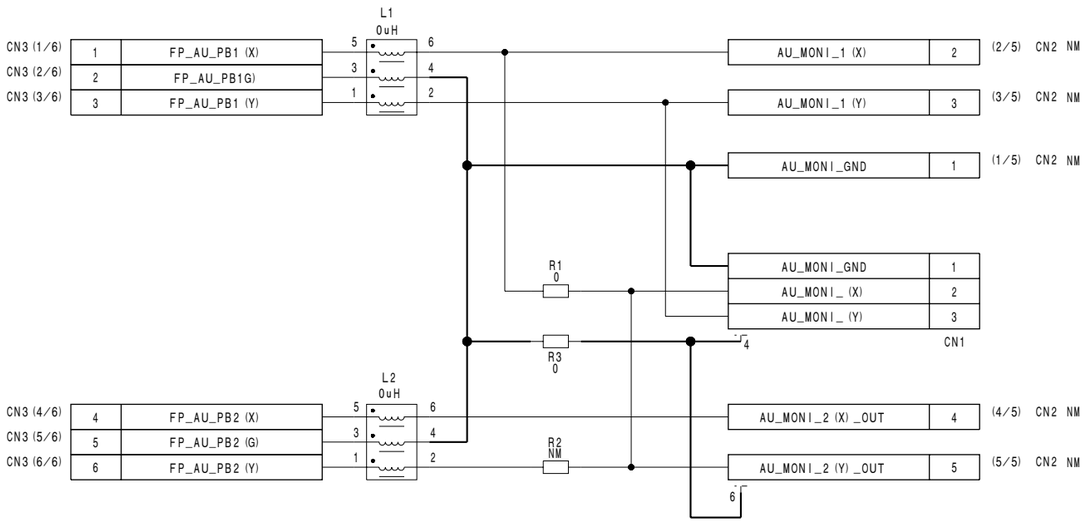

AU-307C

BOARD NO. 1-869-503-11
PDW-F330K_AU-307_111_1

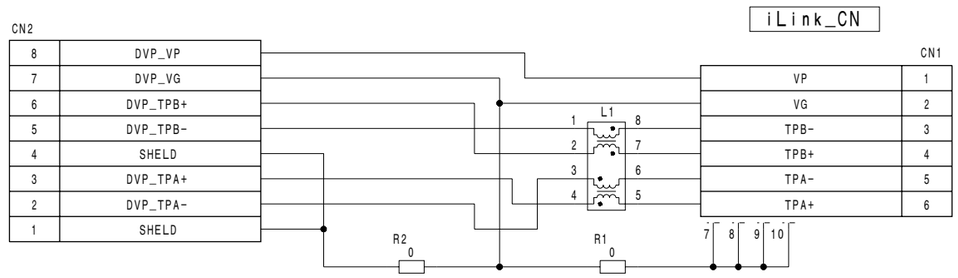

CN-2624

BOARD NO. 1-869-489-11
PDW-F330K_CN-2624_111_1

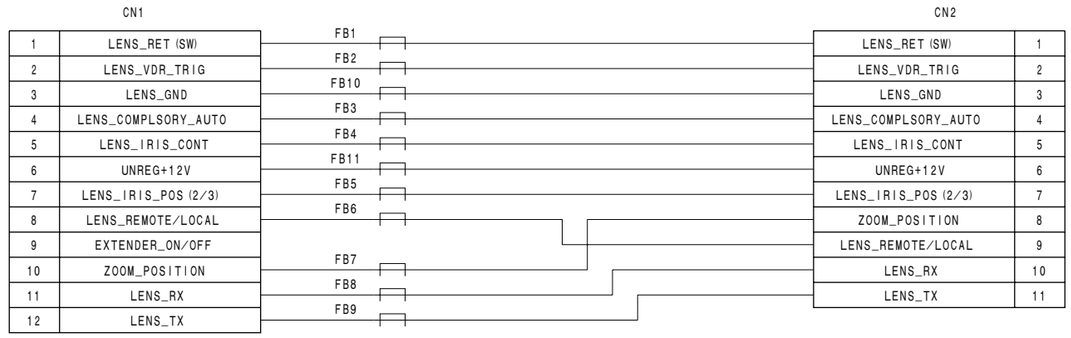

CN-2829

BOARD NO. 1-869-512-11
PDW-F330K_CN-2829_110_1

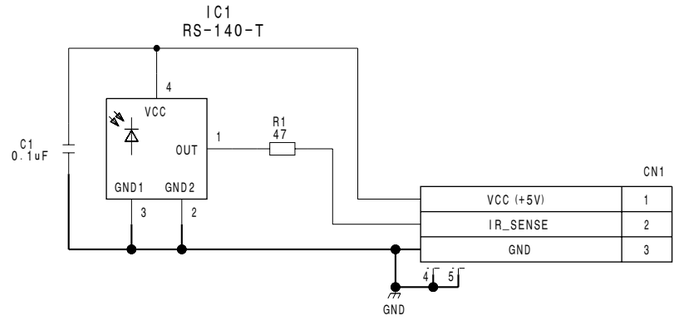

DU-318

BOARD NO. 1-869-502-11
PDW-F330K_DU-318_110_1

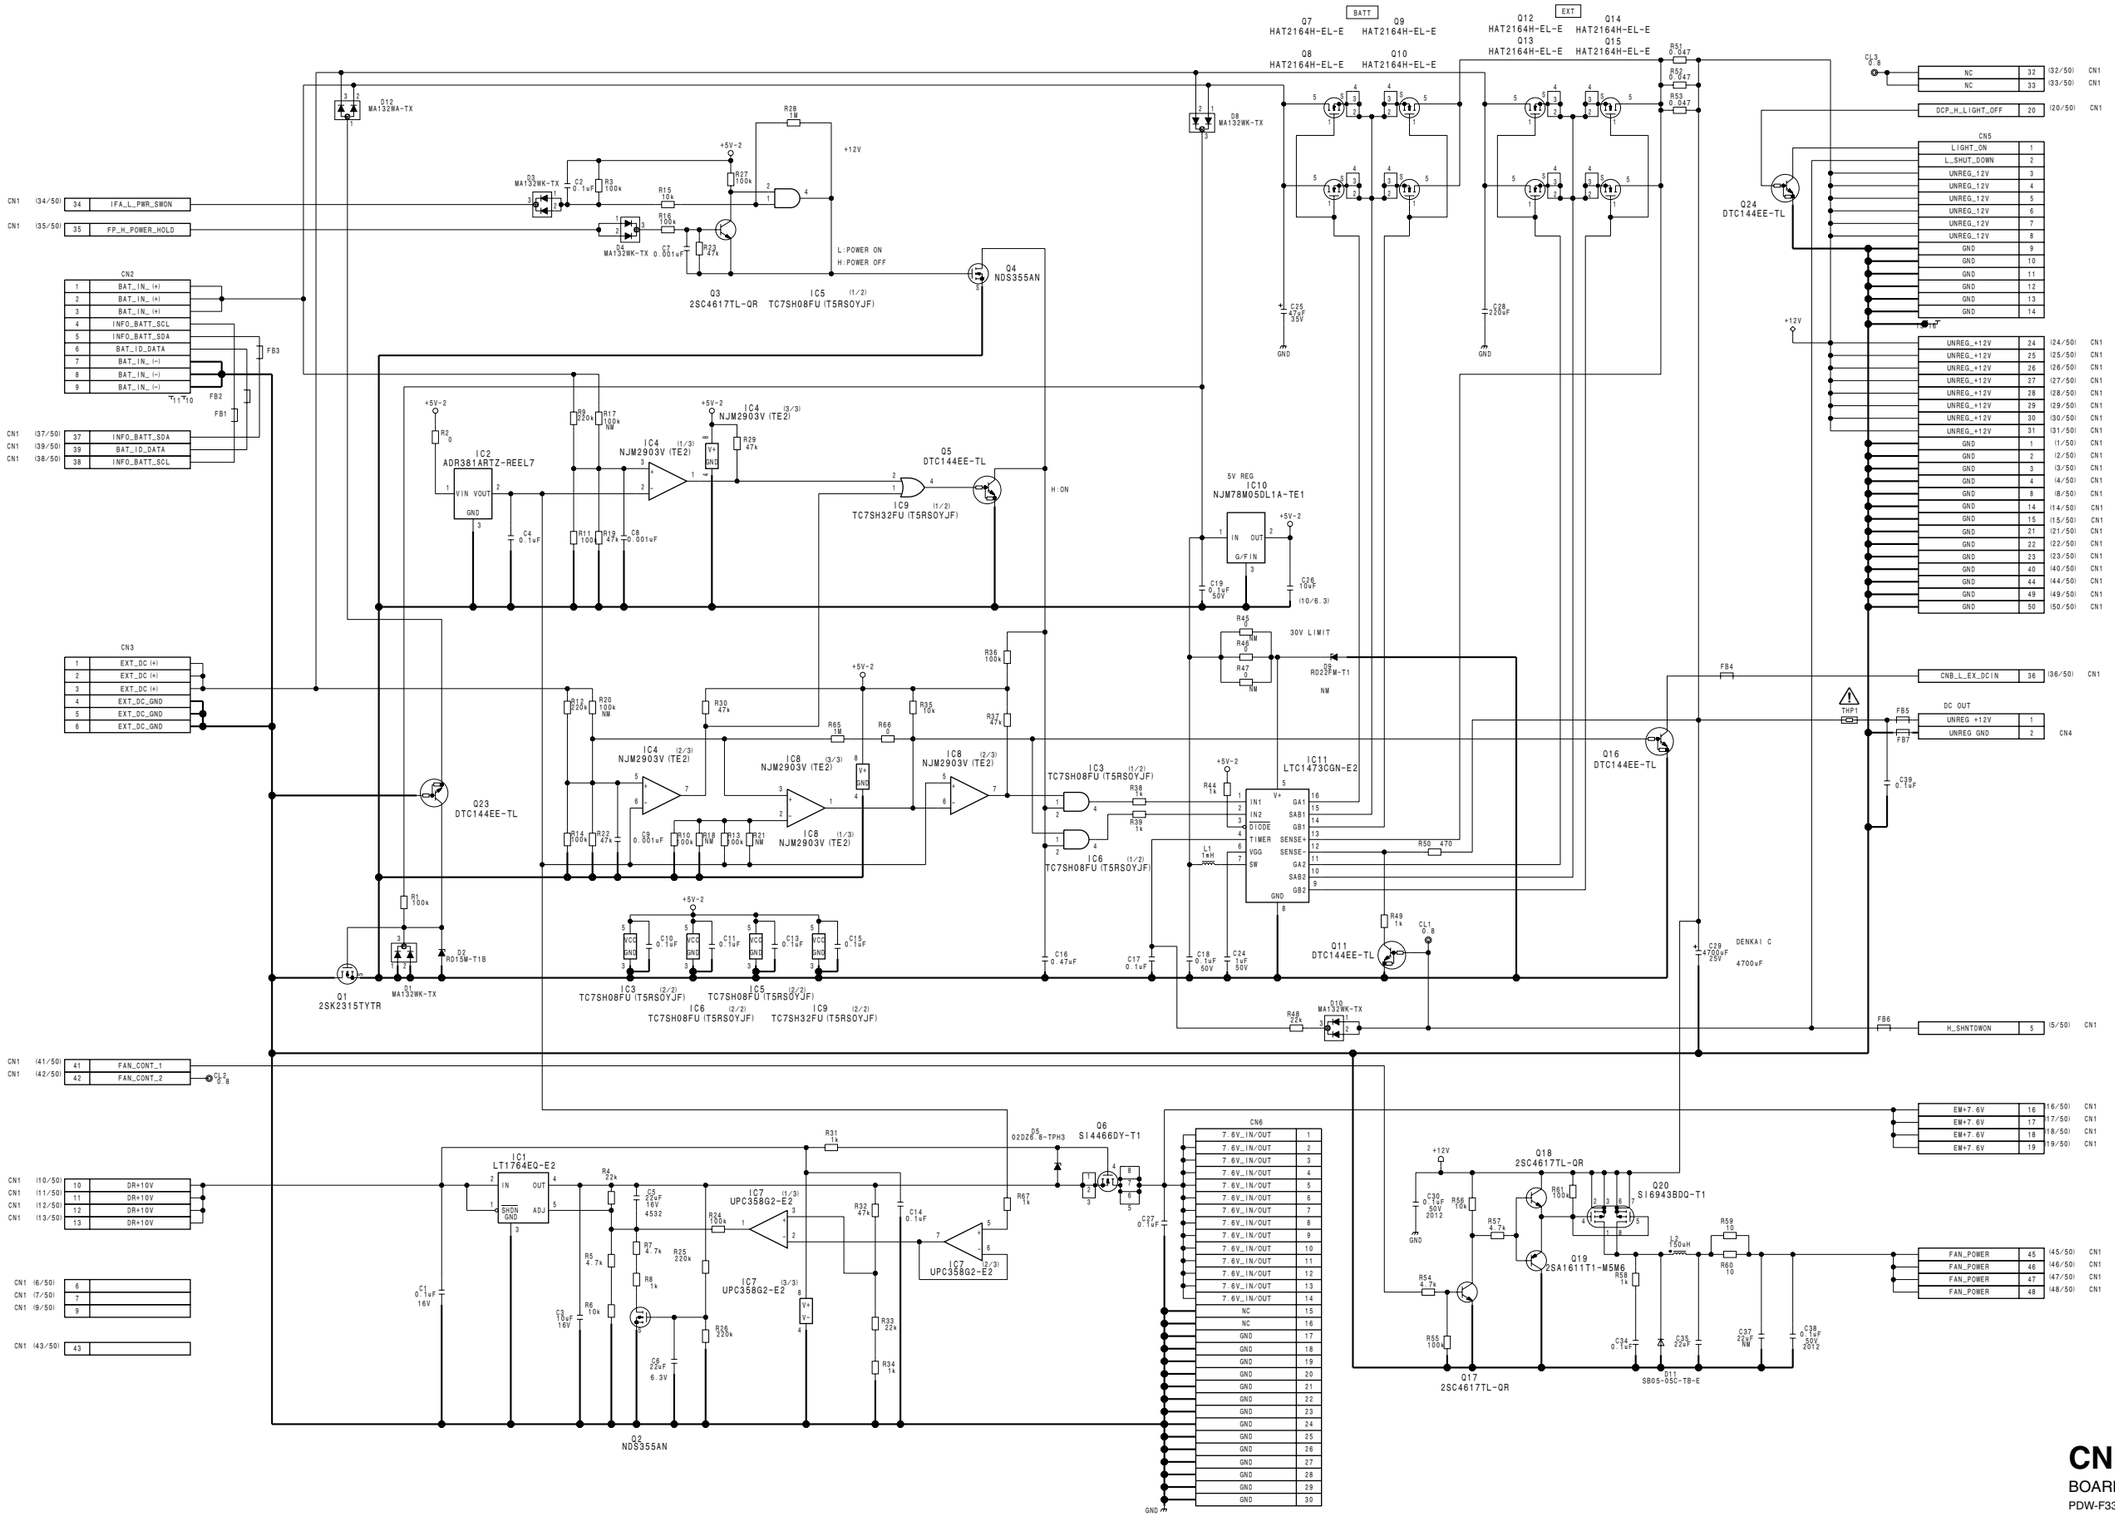

CNB-18

BOARD NO. 1-869-491-11

PDW-F330K_CNB-18_111_1

DCP-37 (1/8)
SUFFIX: -12

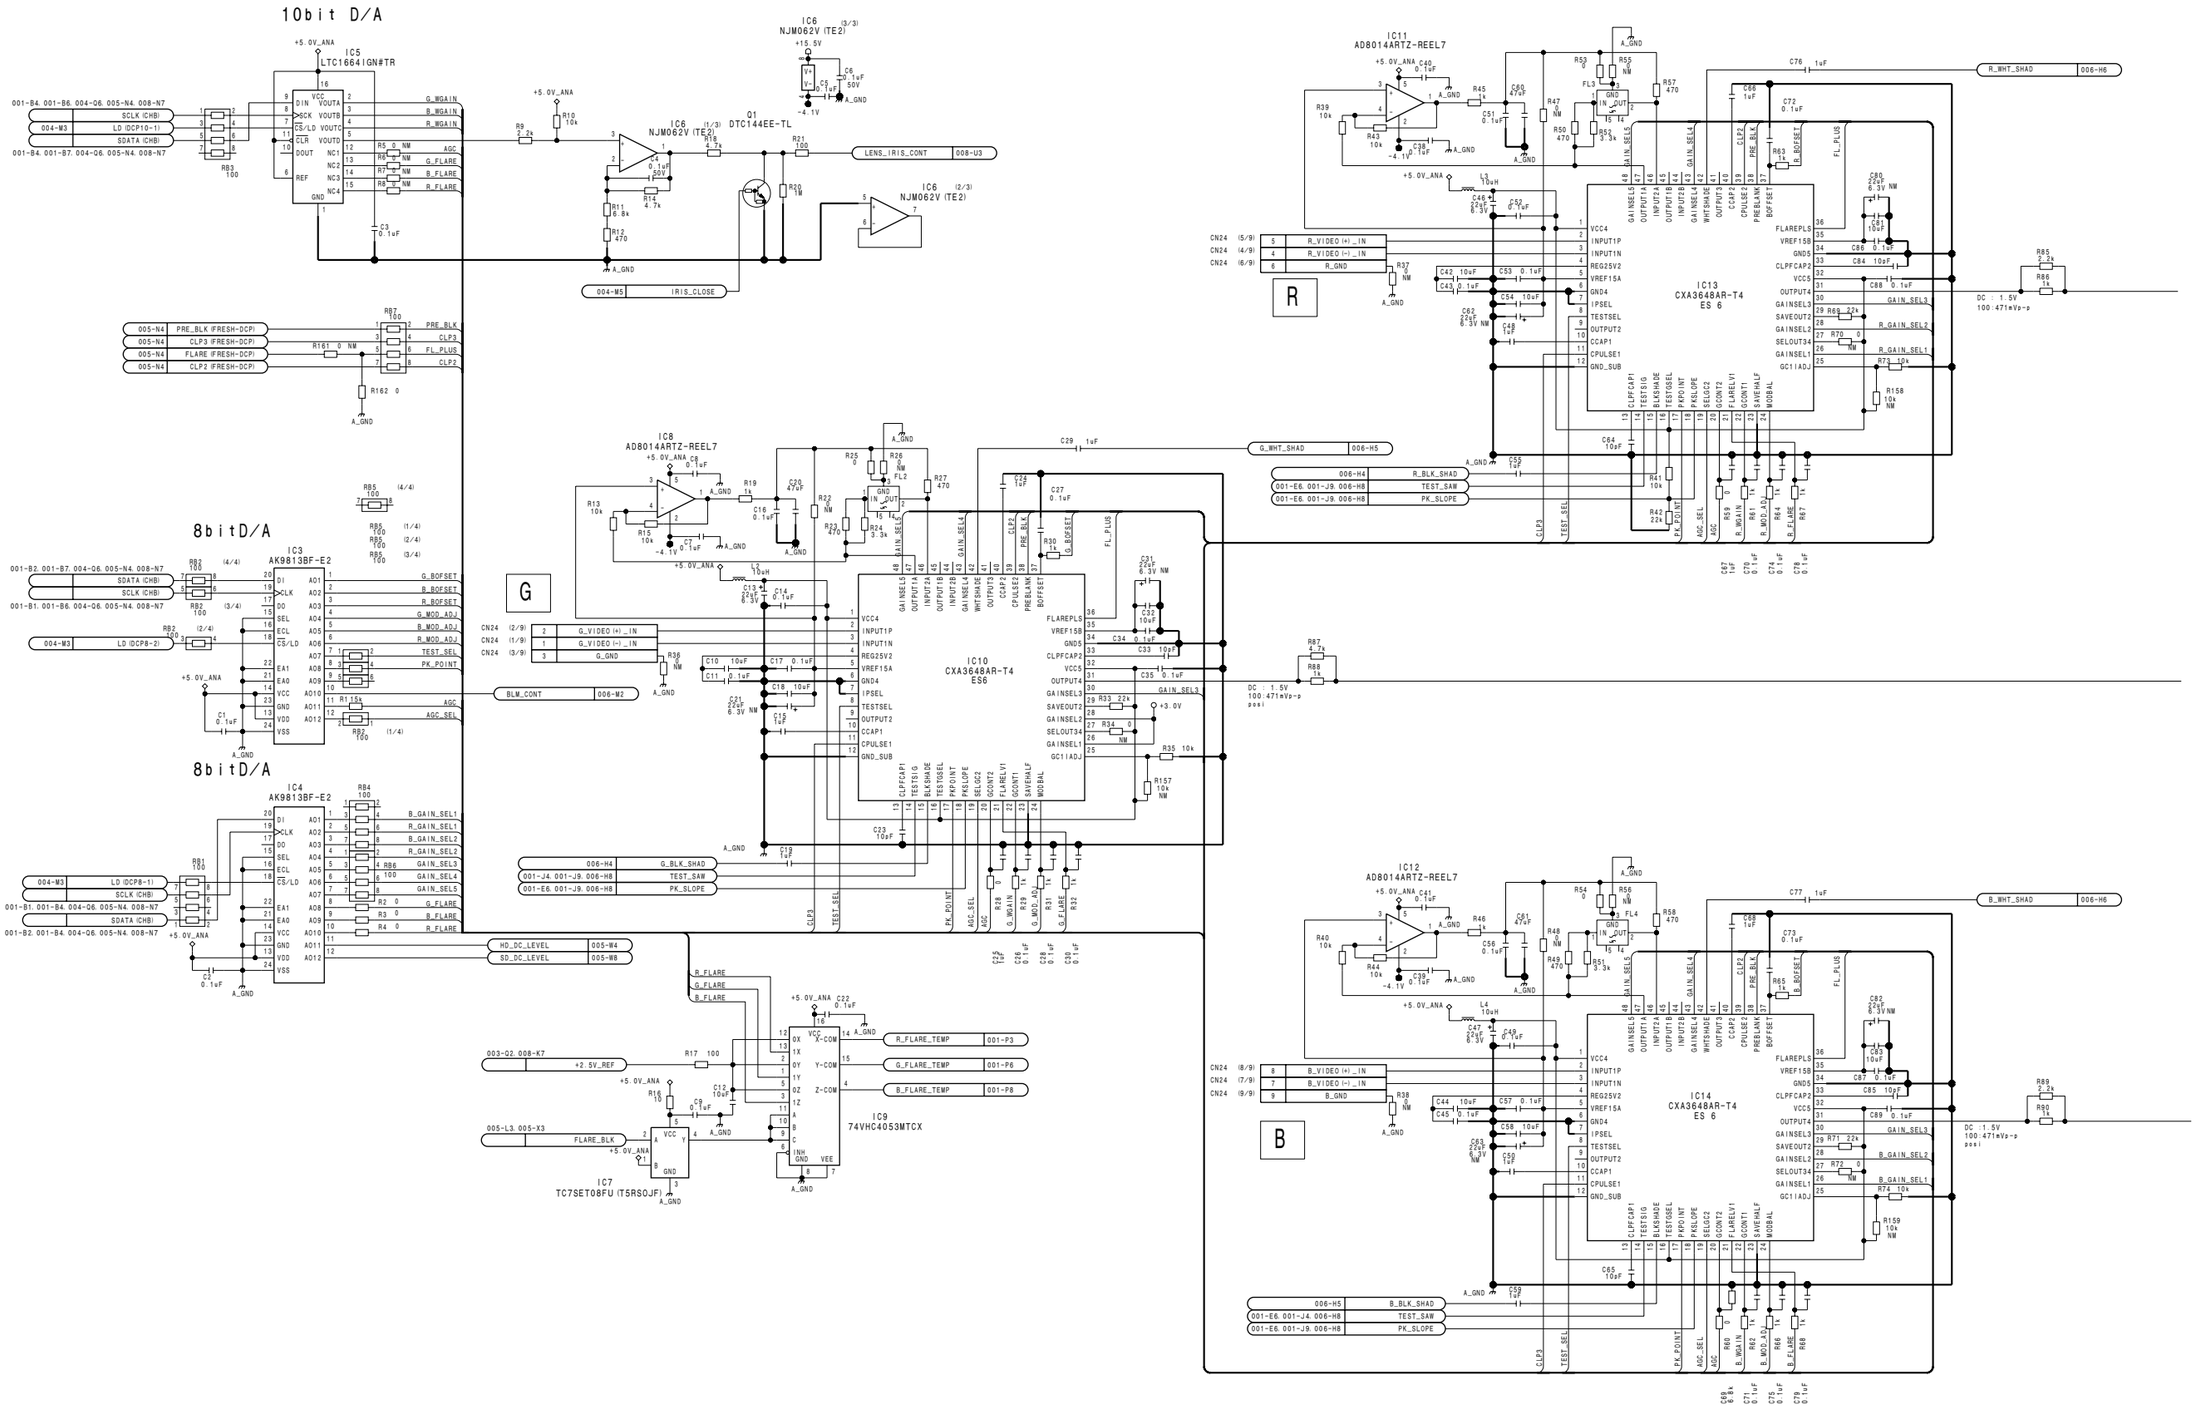

DCP-37 (1/8)
SUFFIX: -12

DCP-37 (1/8)
SUFFIX: -12

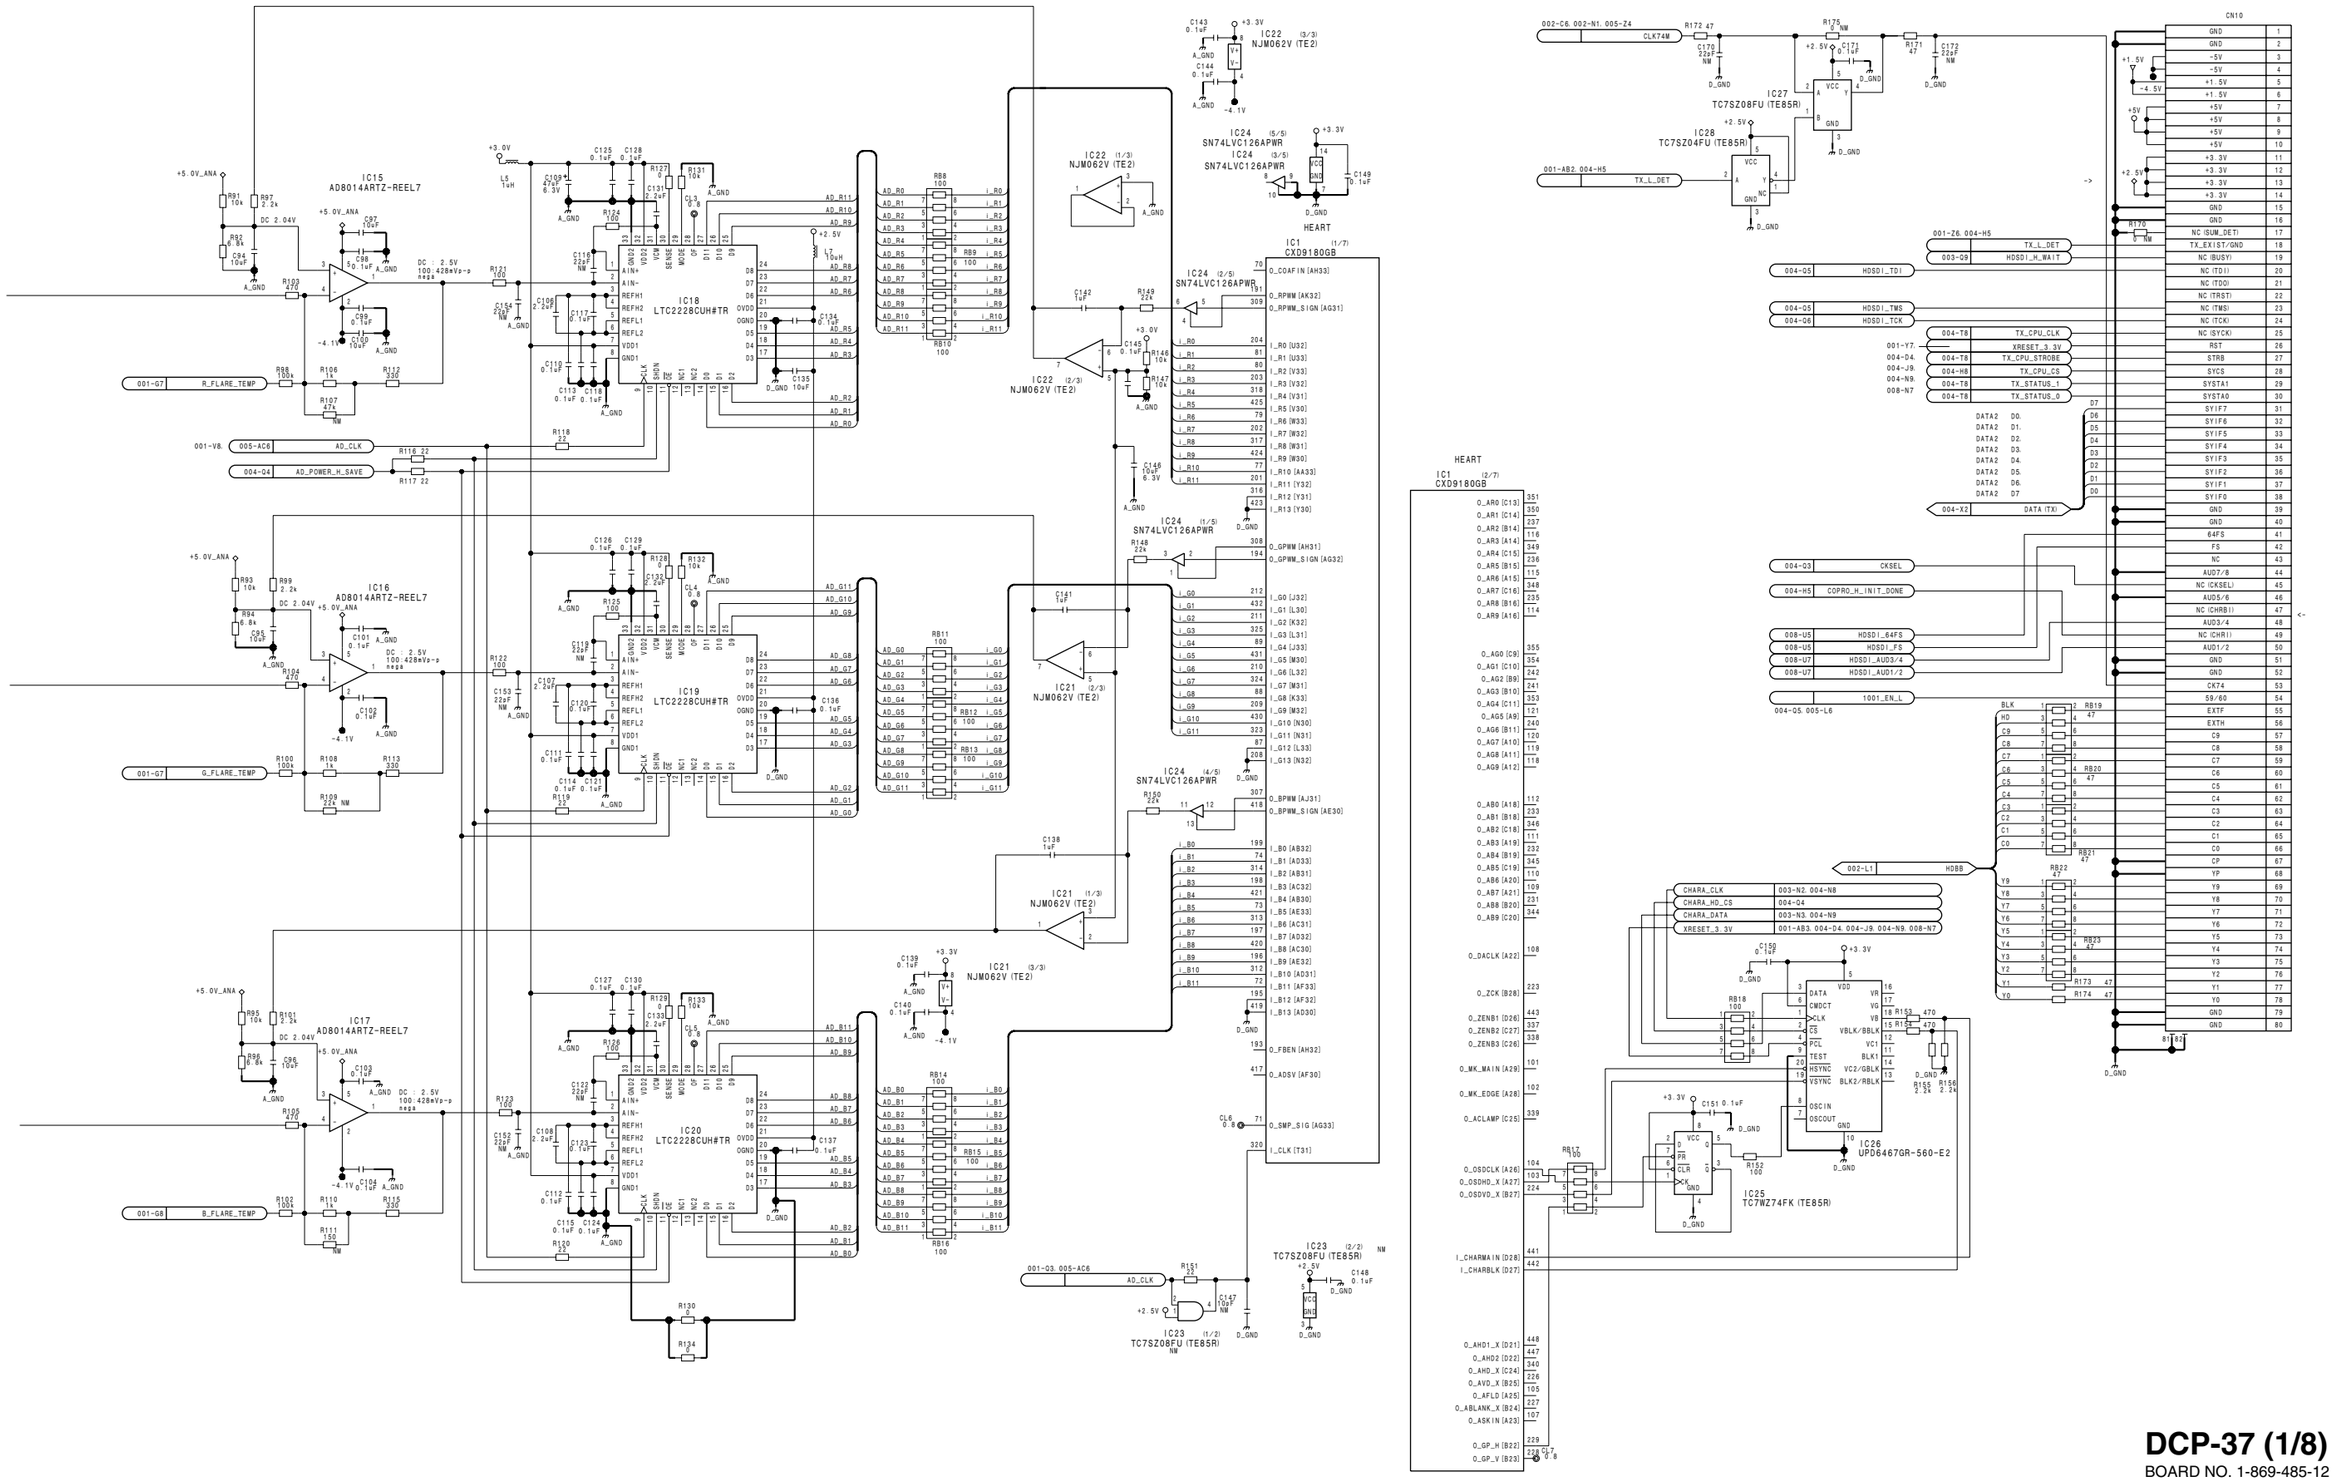

DCP-37 (1/8)
BOARD NO. 1-869-485-12
PDW-F330K_DCP-37_122_1

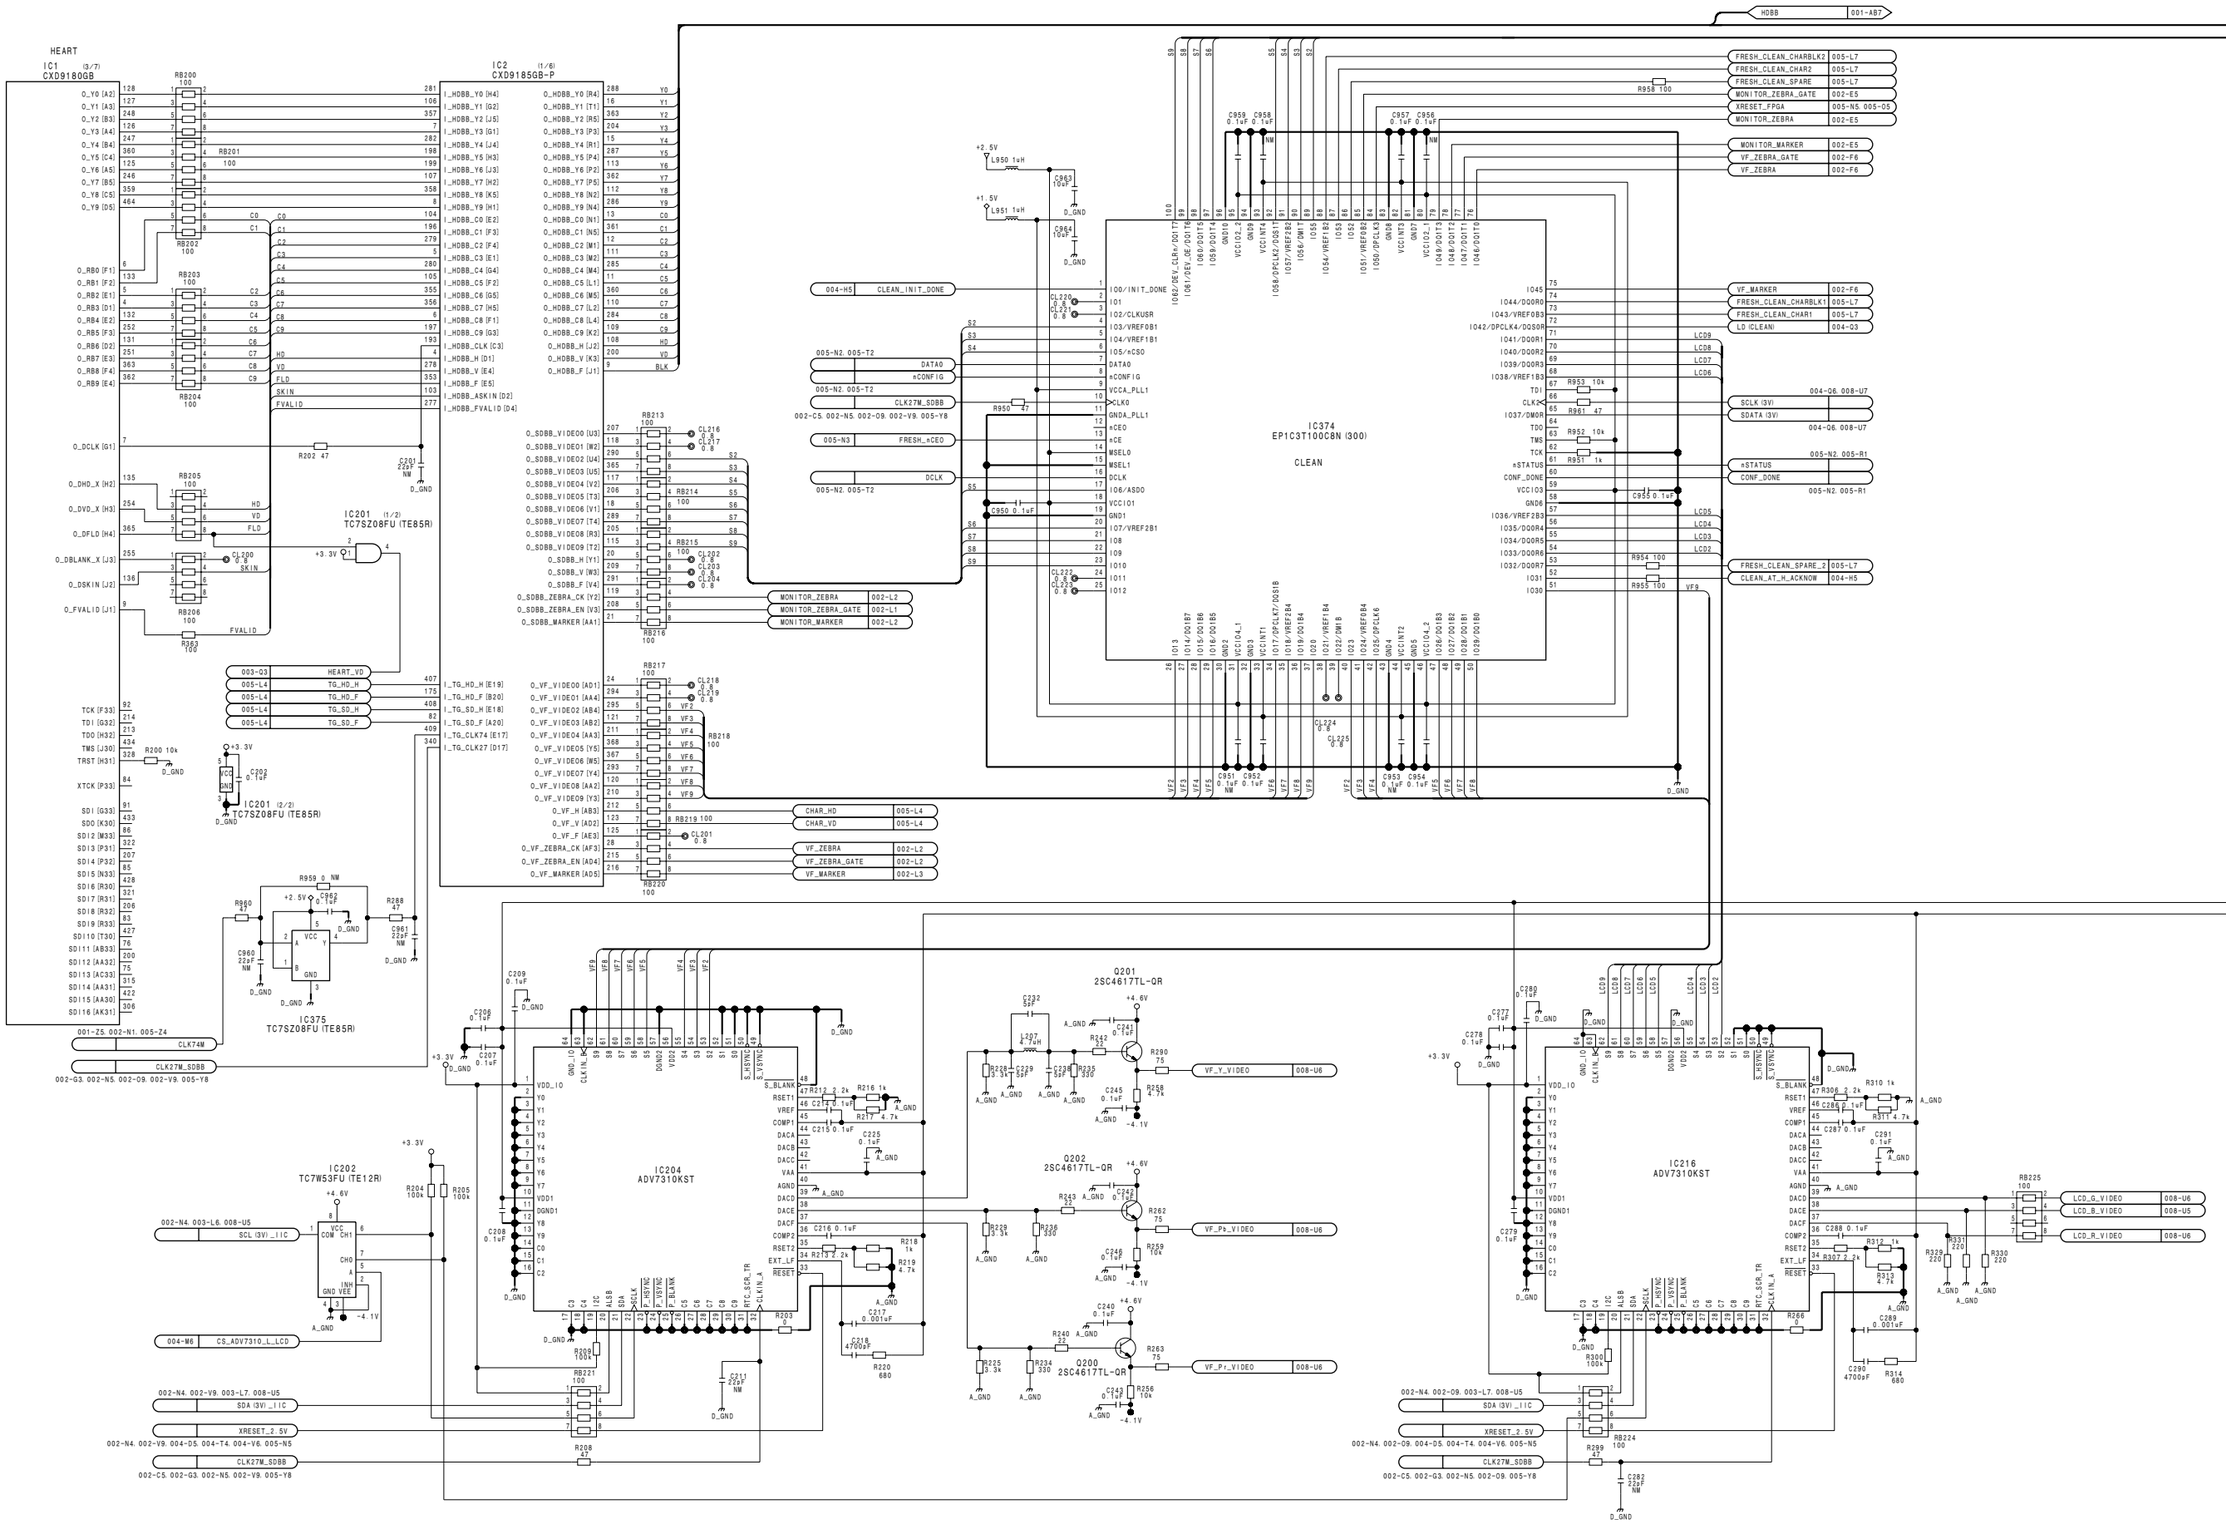
HEART
IC1 (3/7) CXD9180GB
IC2 (1/6) CXD9185GB-P
IC374 EP1C3T100C8N (300) CLEAN
IC201 (1/2) TC7SZ08FU (TE85R)
IC201 (2/2) TC7SZ08FU (TE85R)
IC375 TC7SZ08FU (TE85R)
IC202 TC7W53FU (TE12R)
IC204 ADV7310KST
IC216 ADV7310KST
Q201 2SC4617TL-QR
Q202 2SC4617TL-QR
Q200 2SC4617TL-QR
HDBB 001-AB7
FRESH_CLEAN_CHARBLK2 005-L7
FRESH_CLEAN_CHAR2 005-L7
FRESH_CLEAN_SPARE 005-L7
MONITOR_ZEBRA_GATE 002-E5
XRESET_FPGA 005-N5, 005-O5
MONITOR_ZEBRA 002-E5
MONITOR_MARKER 002-E5
VF_ZEBRA_GATE 002-F6
VF_ZEBRA 002-F6
VF_MARKER 002-F6
FRESH_CLEAN_CHARBLK1 005-L7
FRESH_CLEAN_CHAR1 005-L7
LD (CLEAN) 004-O3
004-Q6, 008-U7
SCLK (3V)
SDATA (3V)
005-N2, 005-R1
nSTATUS
CONF_DONE
FRESH_CLEAN_SPARE_2 005-L7
CLEAN_AT_H_ACKNOW 004-H5
004-H5 CLEAN_INIT_DONE
005-N2, 005-T2 DATA0 nCONFIG
005-N2, 005-T2 CLK27M_SDBB
002-C5, 002-N5, 002-O9, 002-V9, 005-Y8
005-N3 FRESH_nCEO
005-N2, 005-T2 DCLK
MONITOR_ZEBRA 002-L2
MONITOR_ZEBRA_GATE 002-L1
MONITOR_MARKER 002-L2
CHAR_HD 005-L4
CHAR_VD 005-L4
VF_ZEBRA 002-L2
VF_ZEBRA_GATE 002-L2
VF_MARKER 002-L3
VF_Y_VIDEO 008-U6
VF_Pb_VIDEO 008-U6
VF_Pr_VIDEO 008-U6
LCD_G_VIDEO 008-U6
LCD_B_VIDEO 008-U5
LCD_R_VIDEO 008-U6
003-Q3 HEART_VD
005-L4 TG_HD_H
005-L4 TG_HD_F
005-L4 TG_SD_H
005-L4 TG_SD_F
001-Z5, 002-N1, 005-Z4 CLK74M
002-G3, 002-N5, 002-O9, 002-V9, 005-Y8 CLK27M_SDBB
002-N4, 003-L6, 008-U5 SCL (3V)_IIC
004-W6 CS_ADV7310_L_LCD
002-N4, 002-V9, 003-L7, 008-U5 SDA (3V)_IIC
002-N4, 002-V9, 004-O5, 004-T4, 004-V6, 005-N5 XRESET_2.5V
002-C5, 002-G3, 002-N5, 002-V9, 005-Y8 CLK27M_SDBB
002-N4, 002-O9, 003-L7, 008-U5 SDA (3V)_IIC
002-N4, 002-O9, 004-O5, 004-T4, 004-V6, 005-N5 XRESET_2.5V
002-C5, 002-G3, 002-N5, 002-O9, 005-Y8 CLK27M_SDBB

DCP-37 (2/8)
SUFFIX: -12

DCP-37 (2/8)
SUFFIX: -12

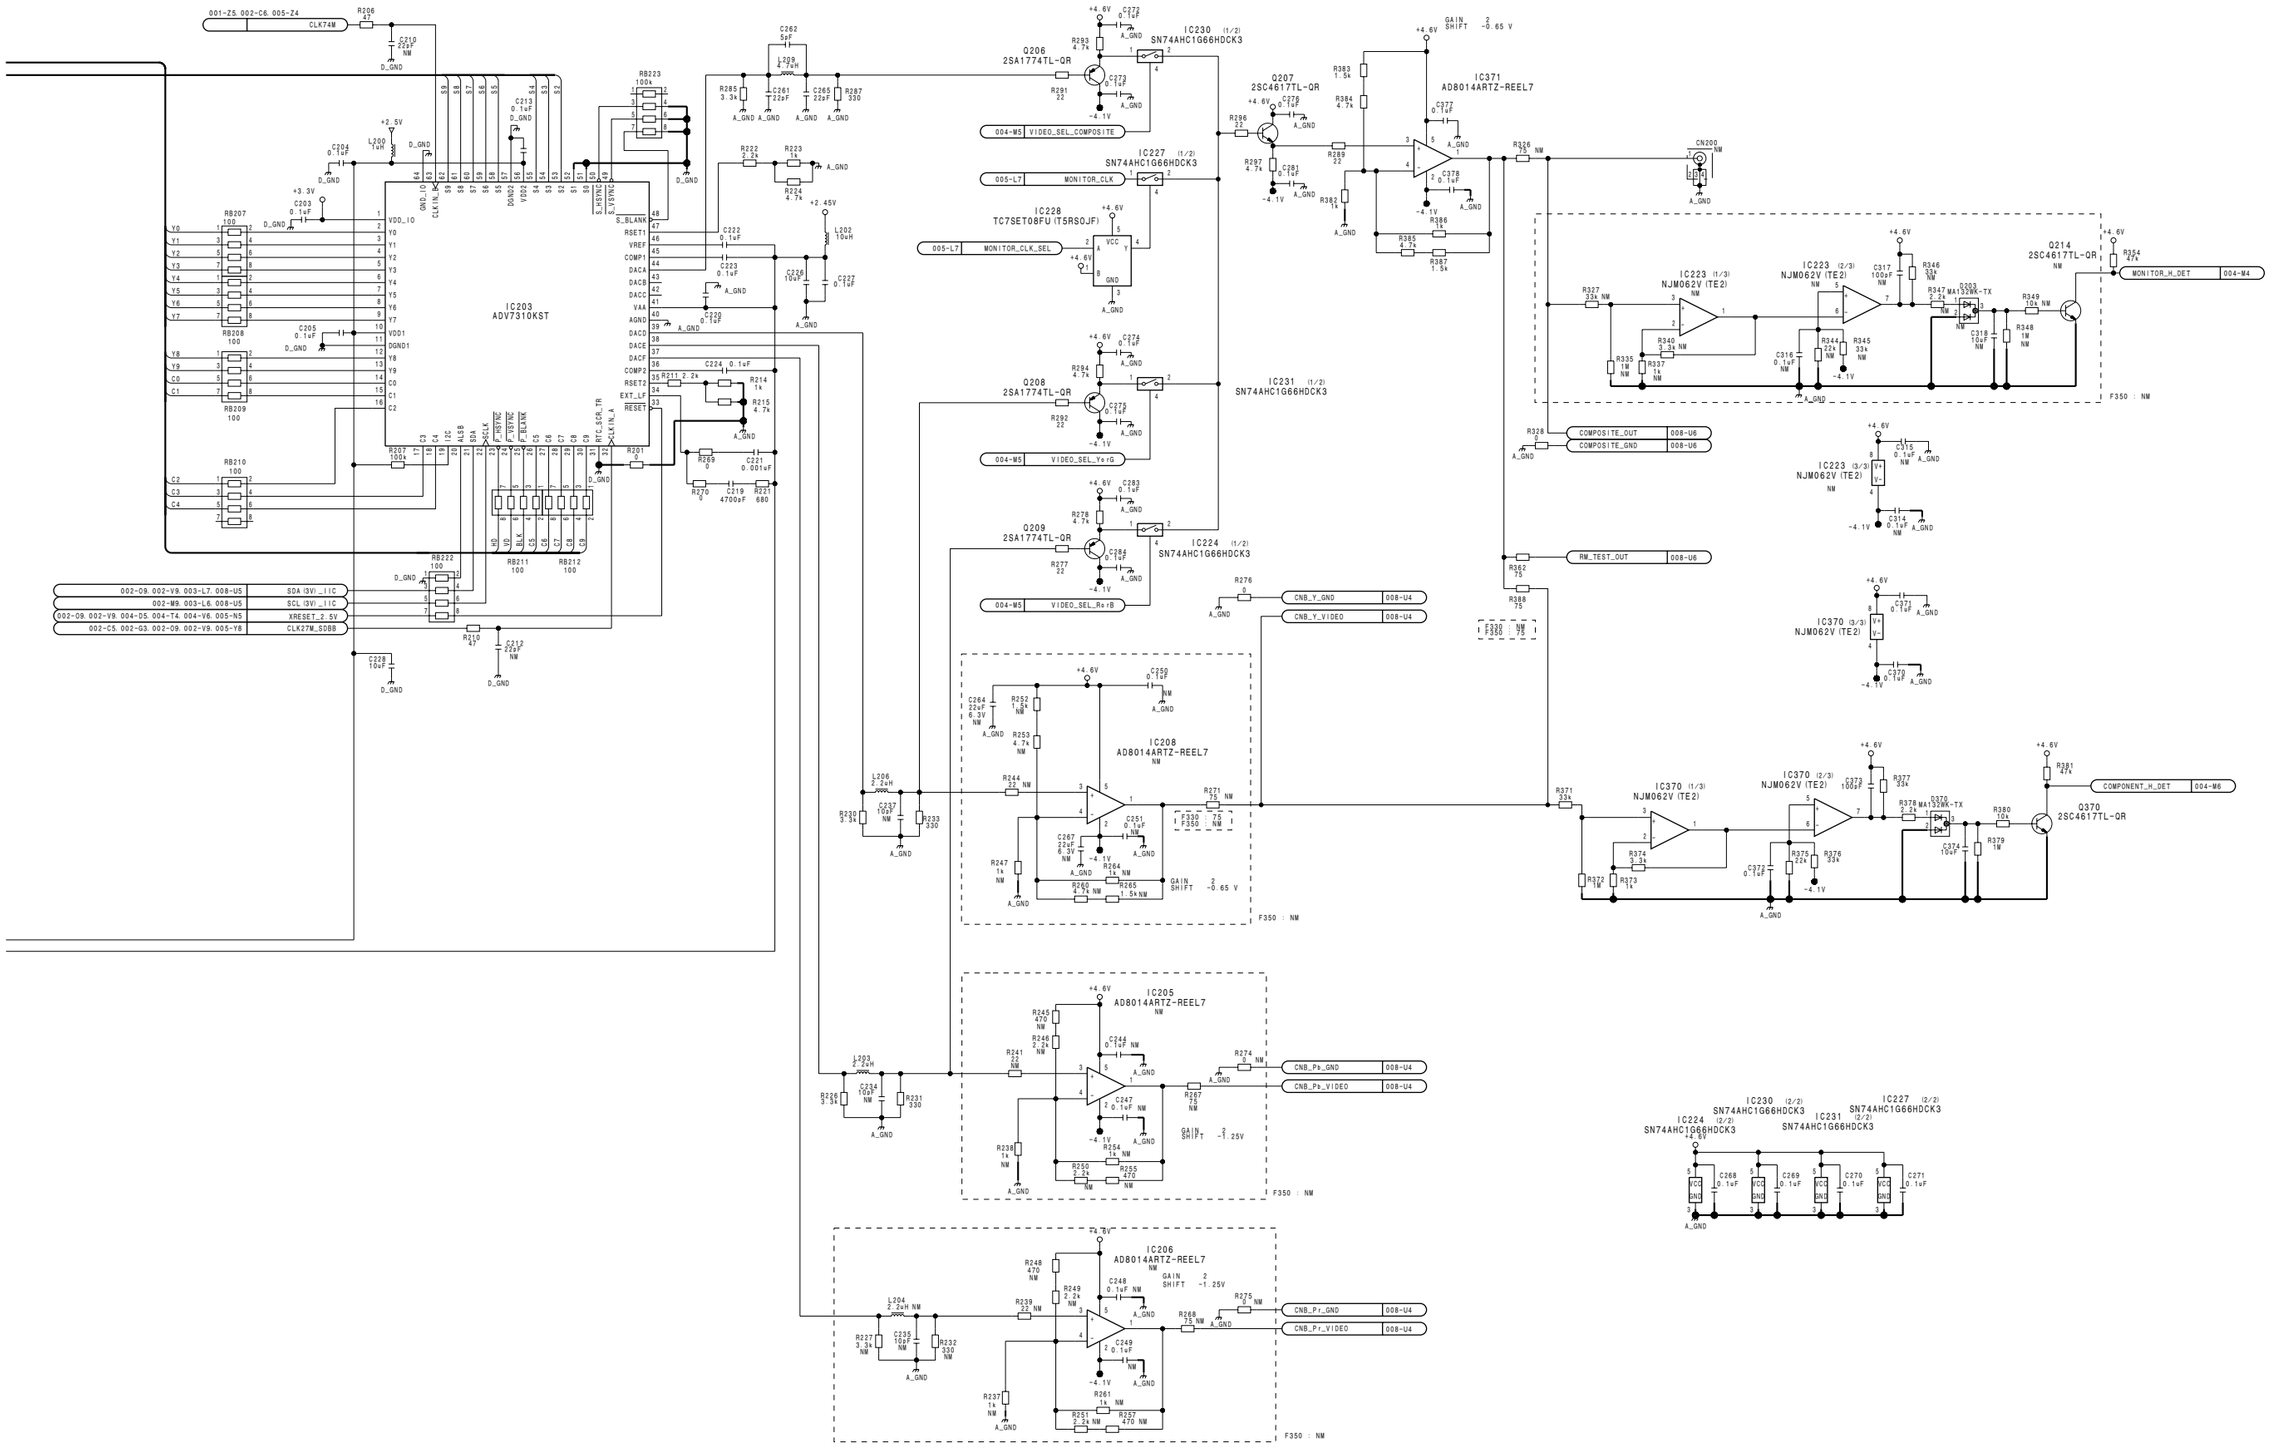

DCP-37 (2/8)
BOARD NO. 1-869-485-12
PDW-F330K_DCP-37_122_2

DCP-37 (3/8)
SUFFIX: -12

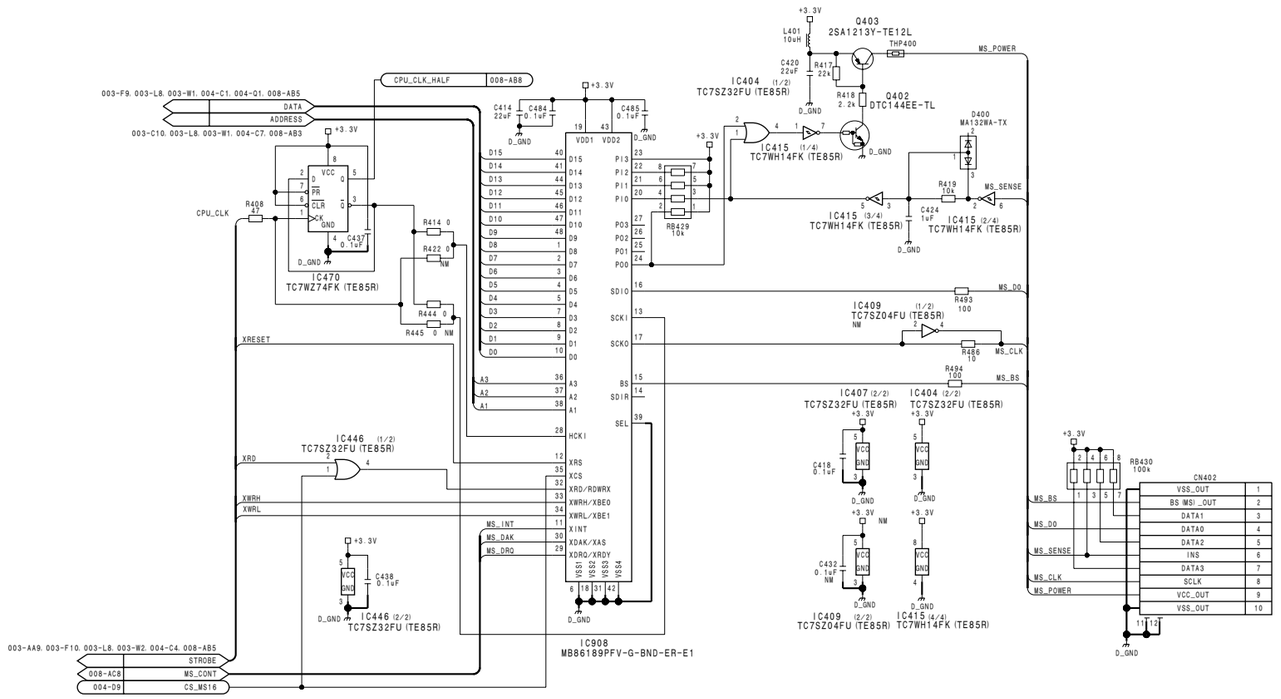

4-10

DCP-37 (3/8)
SUFFIX: -12

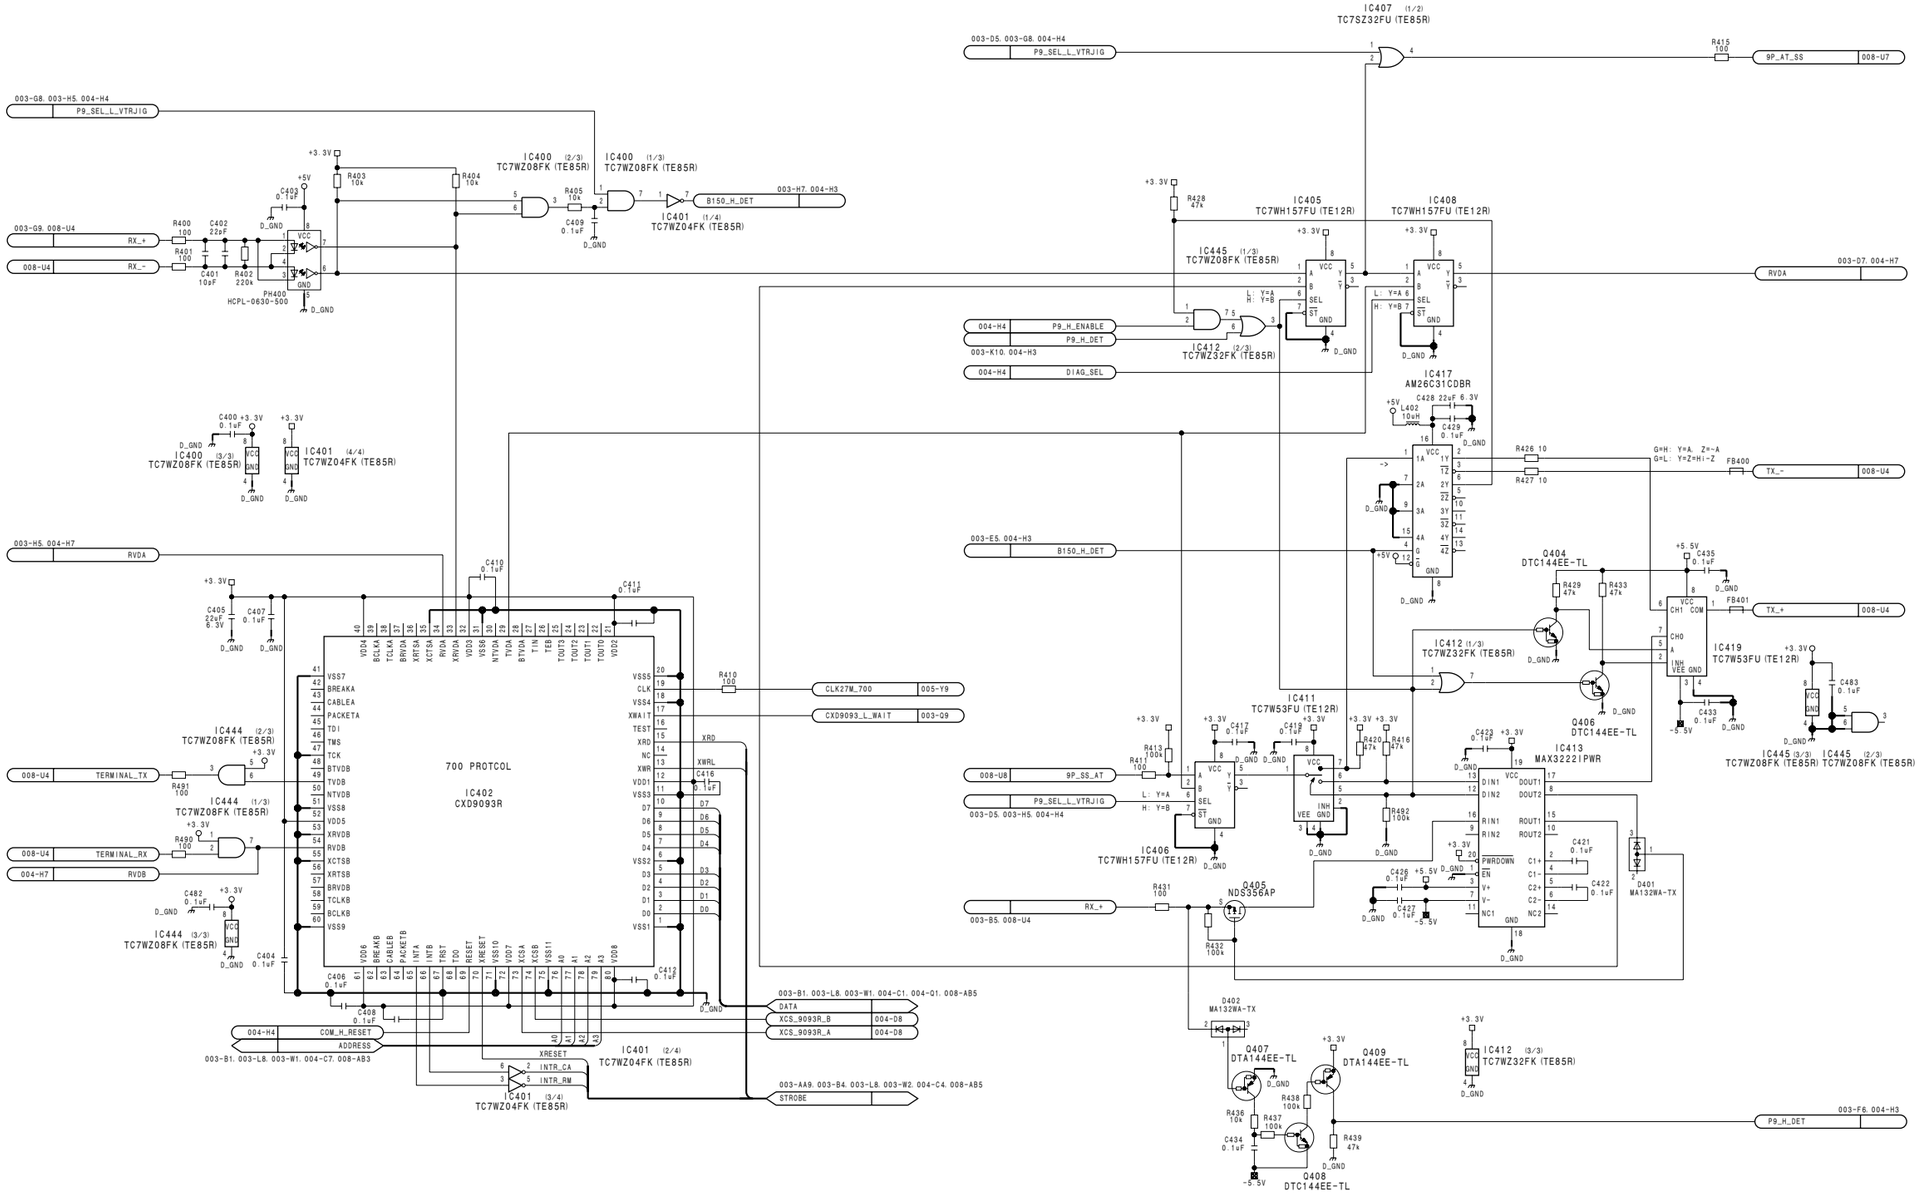

DCP-37 (3/8)
SUFFIX: -12

DCP-37 (3/8)
SUFFIX: -12

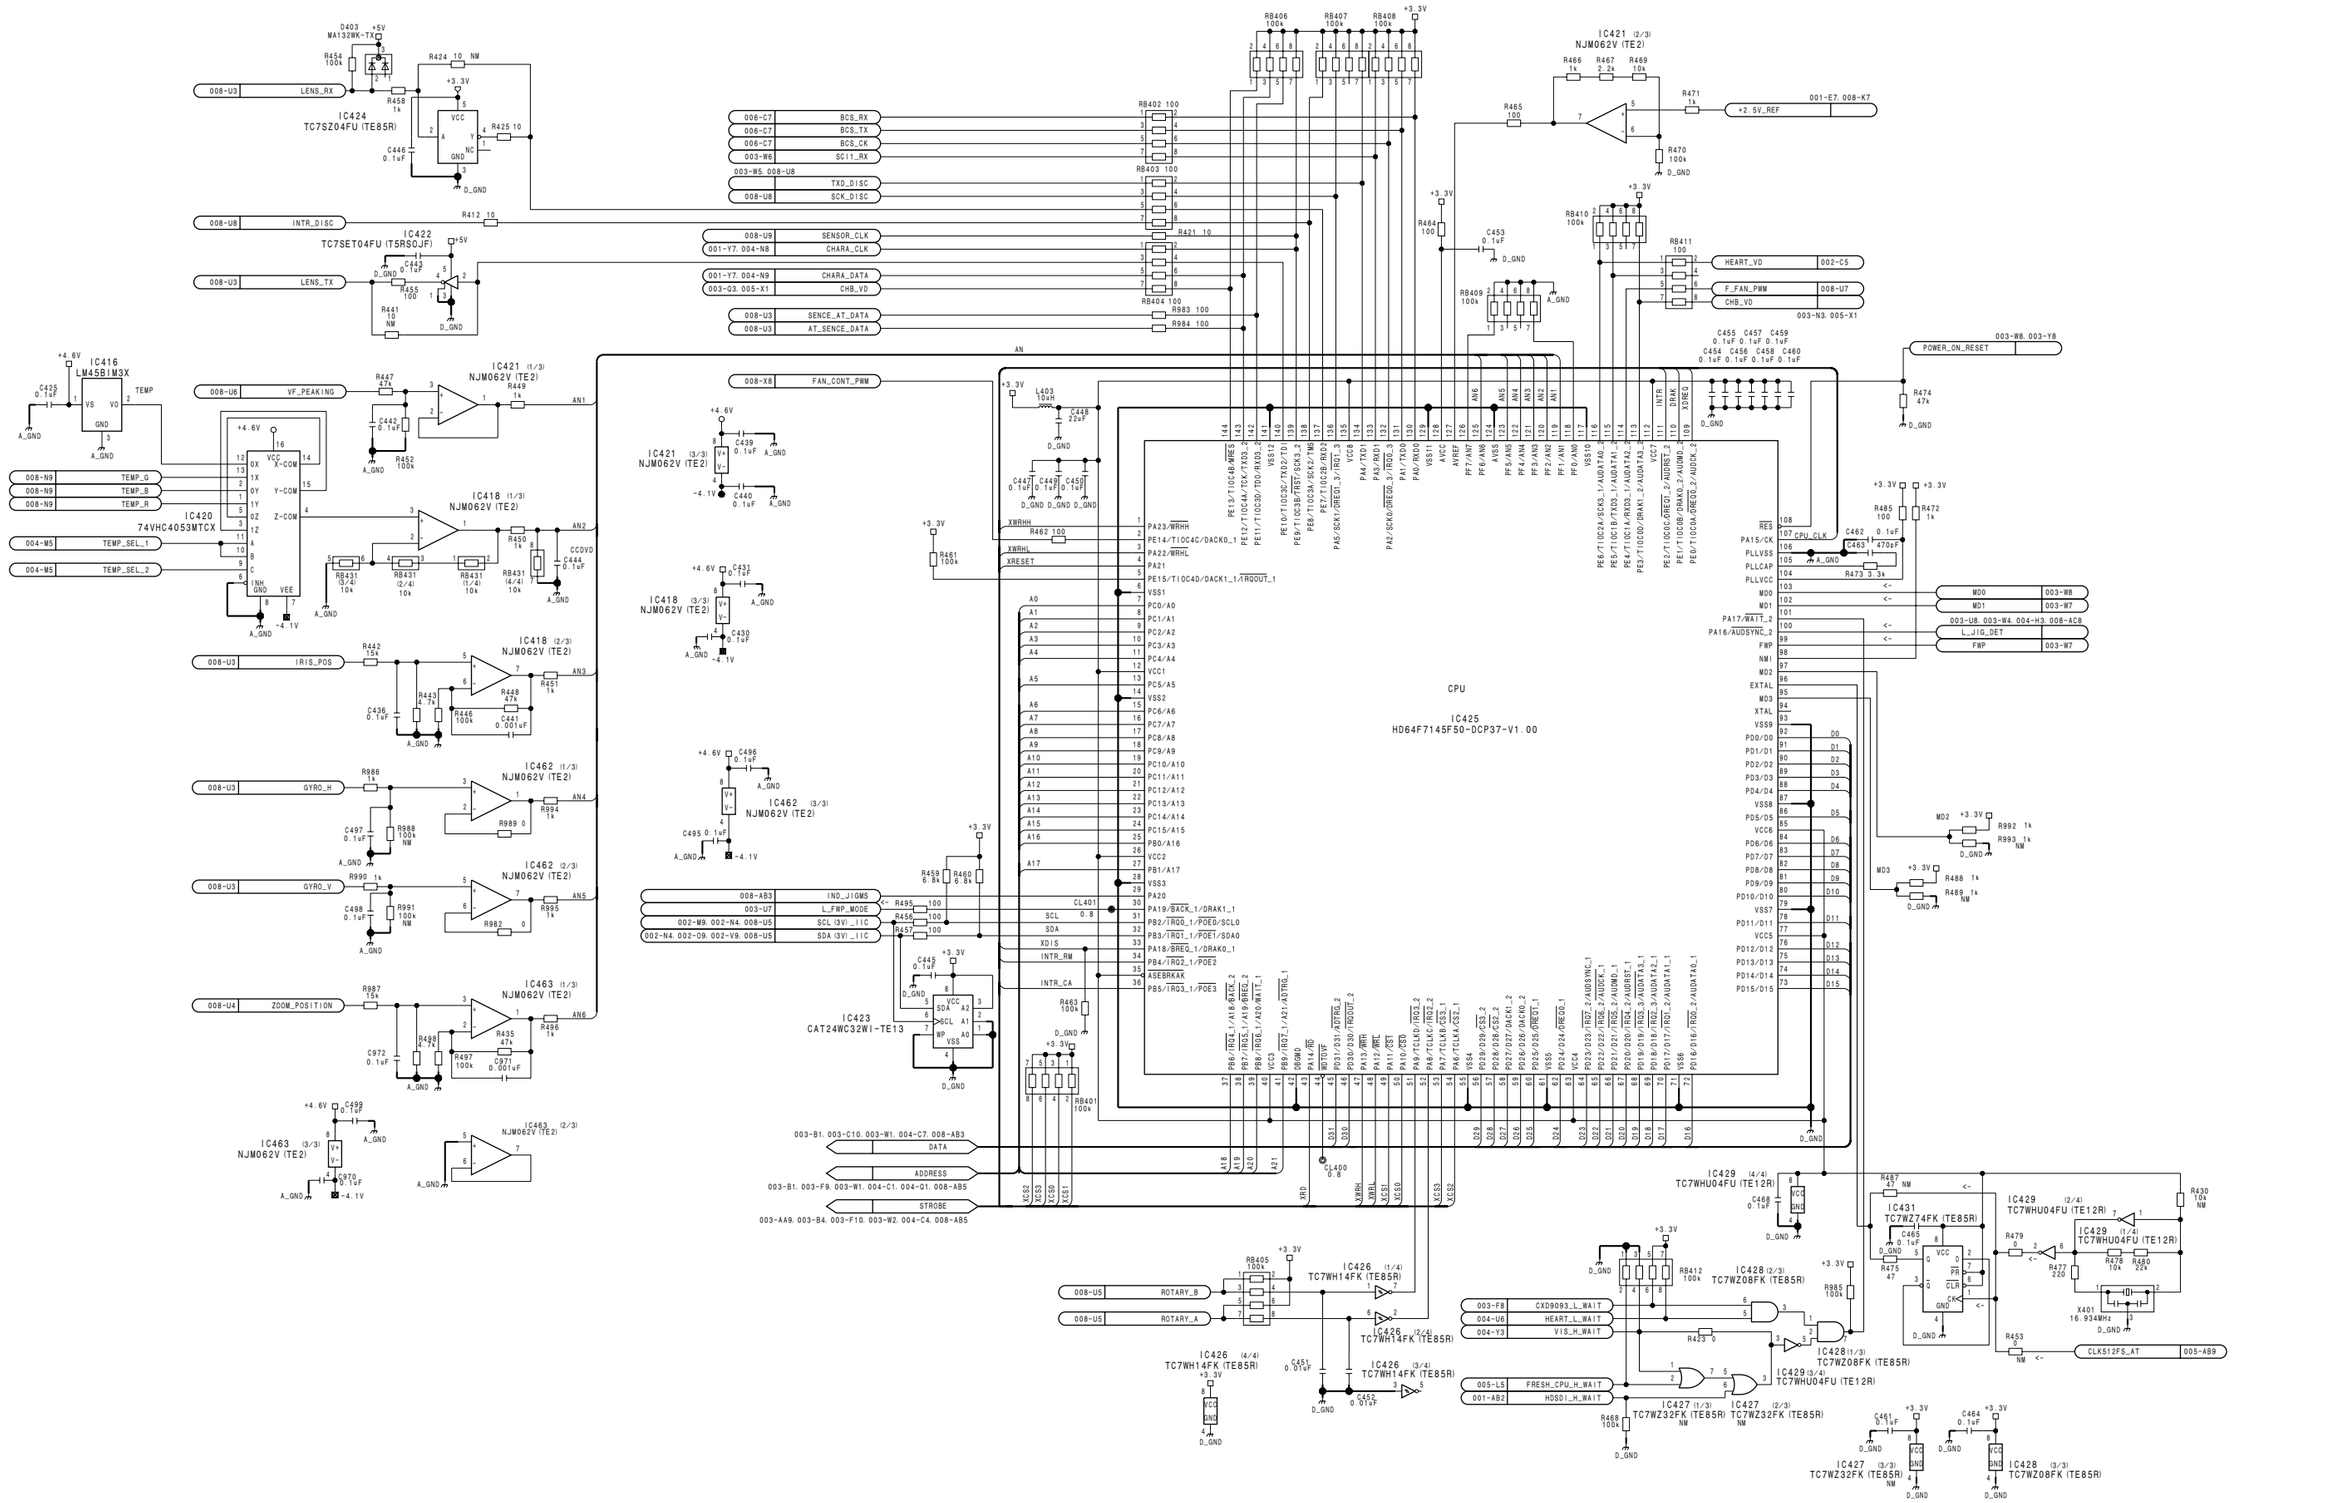

4-12 4-12

PDW-F330/V2 (J,E)

DCP-37 (3/8)
SUFFIX: -12

DCP-37 (3/8)
SUFFIX: -12

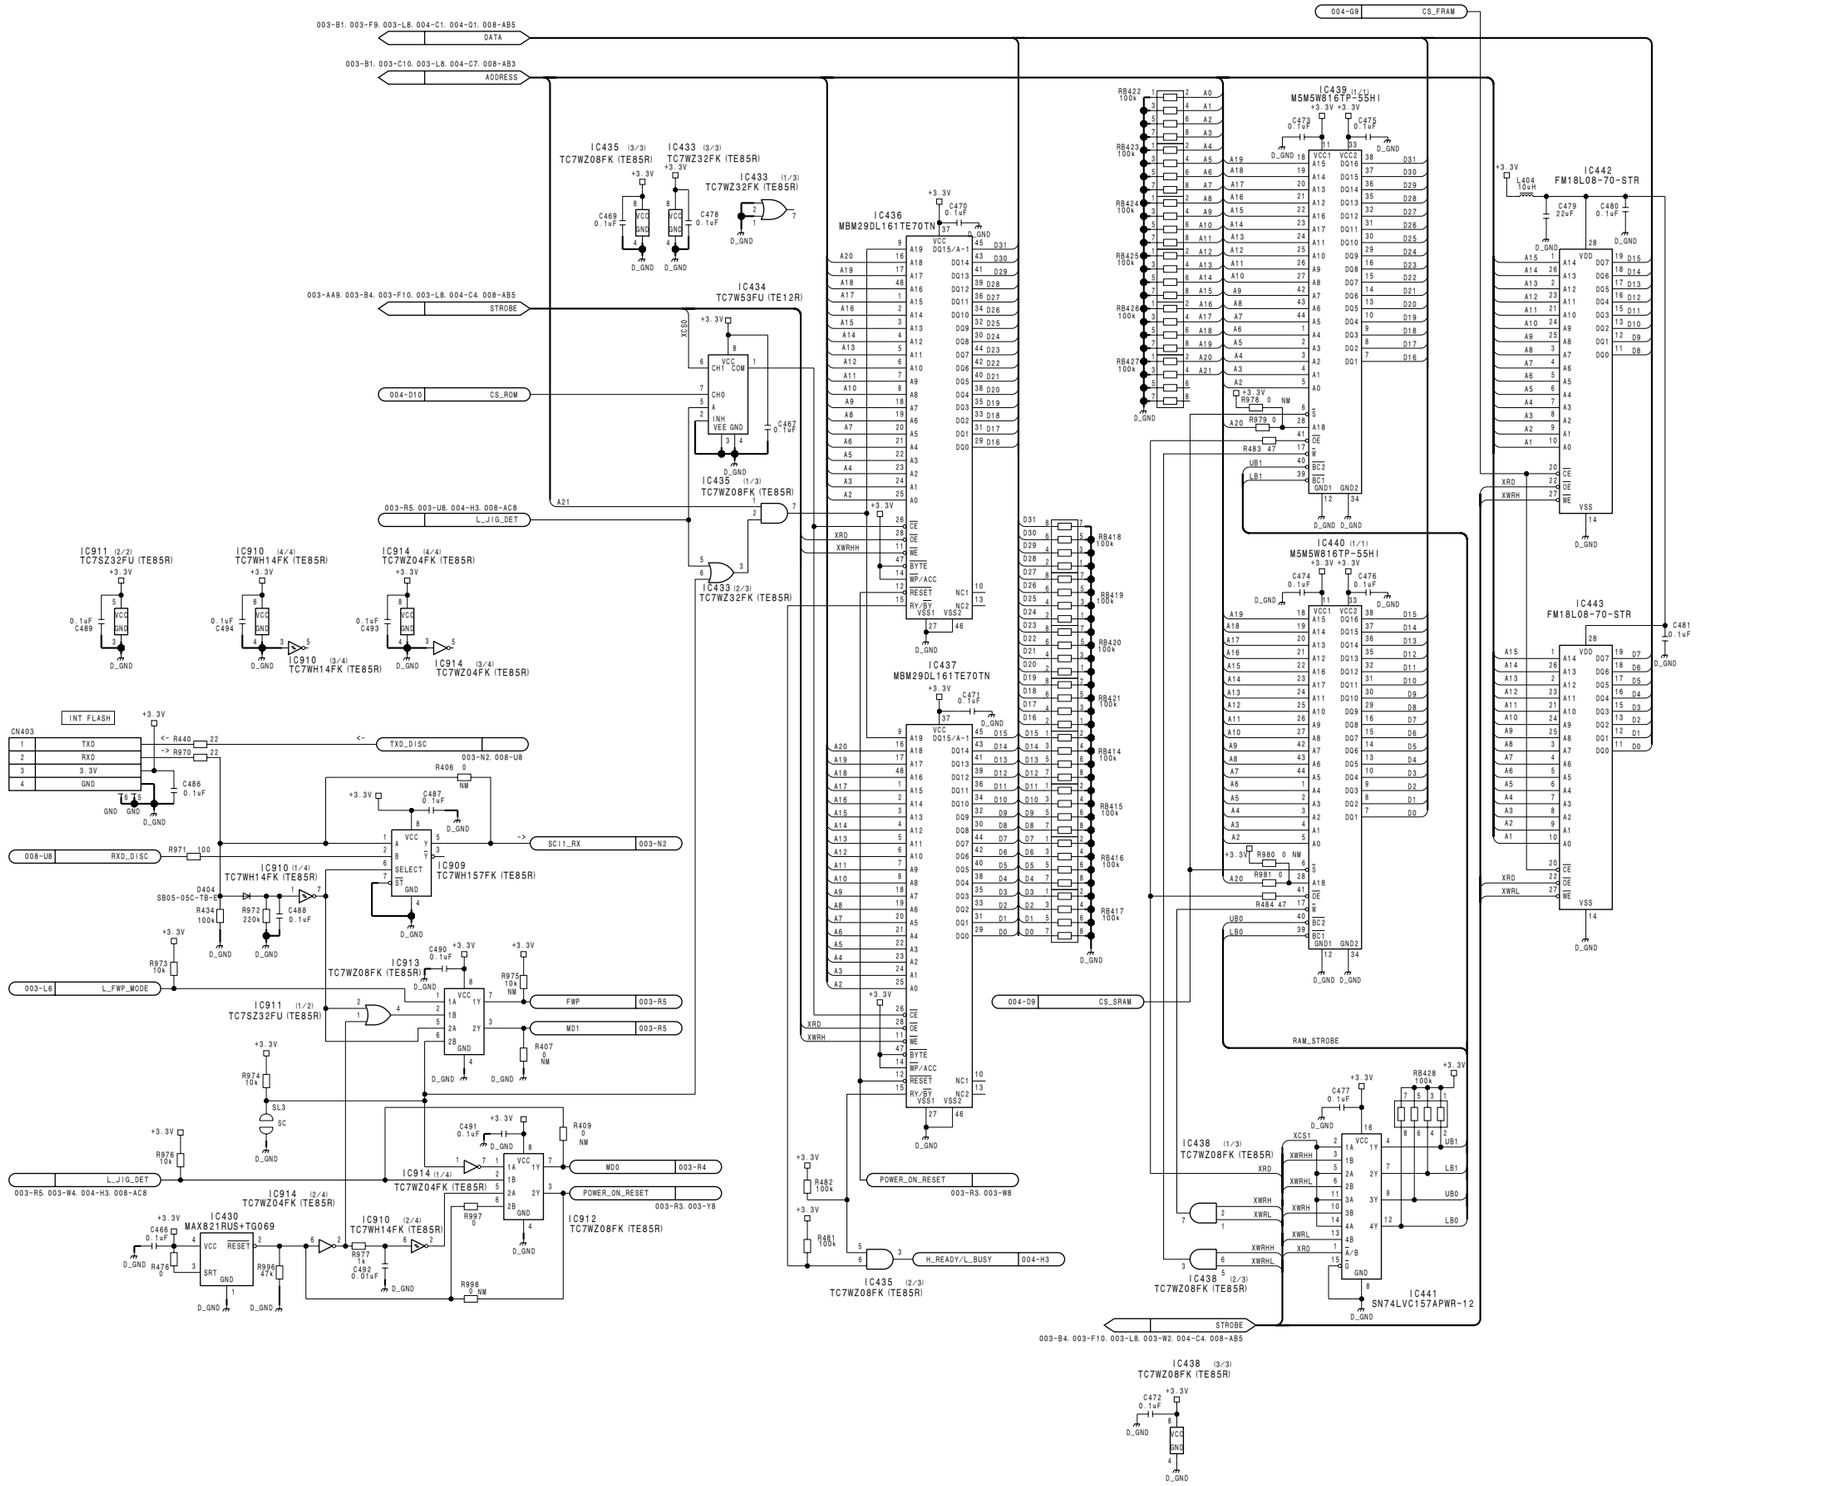

DCP-37 (3/8)
BOARD NO. 1-869-485-12
PDW-F330K_DCP-37_122_3

DCP-37 (4/8)
SUFFIX: -12

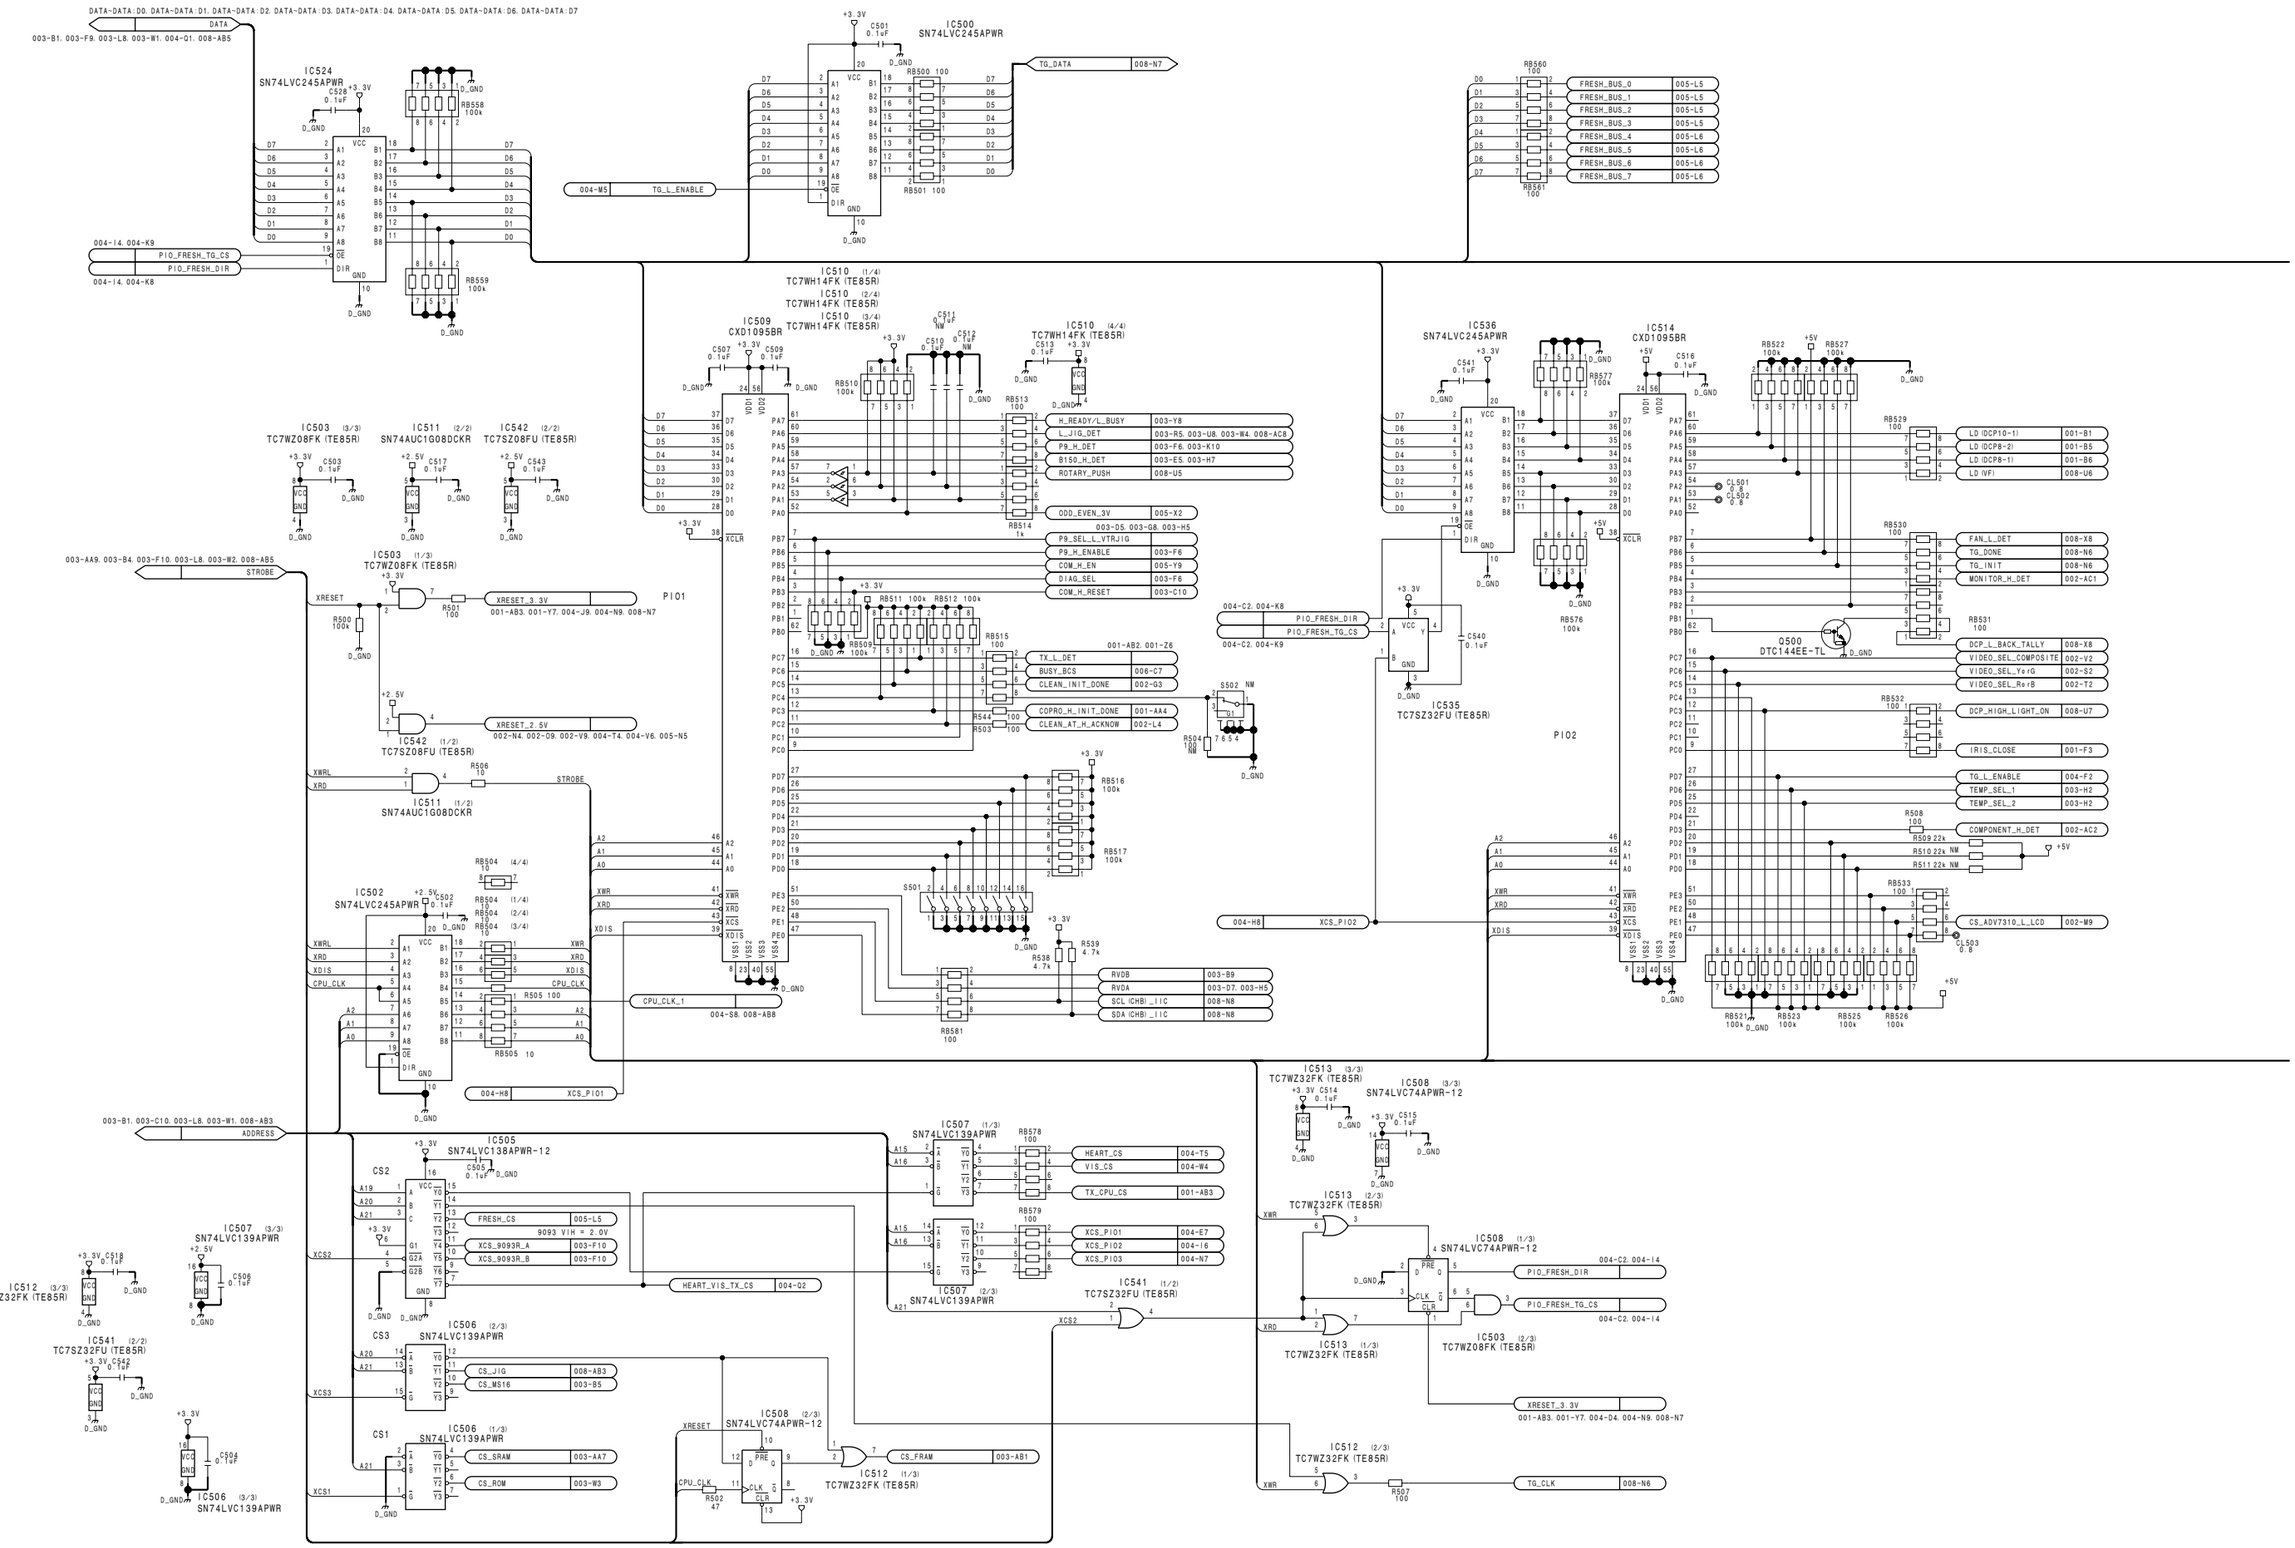

DCP-37 (4/8)
SUFFIX: -12

DCP-37 (4/8)
SUFFIX: -12

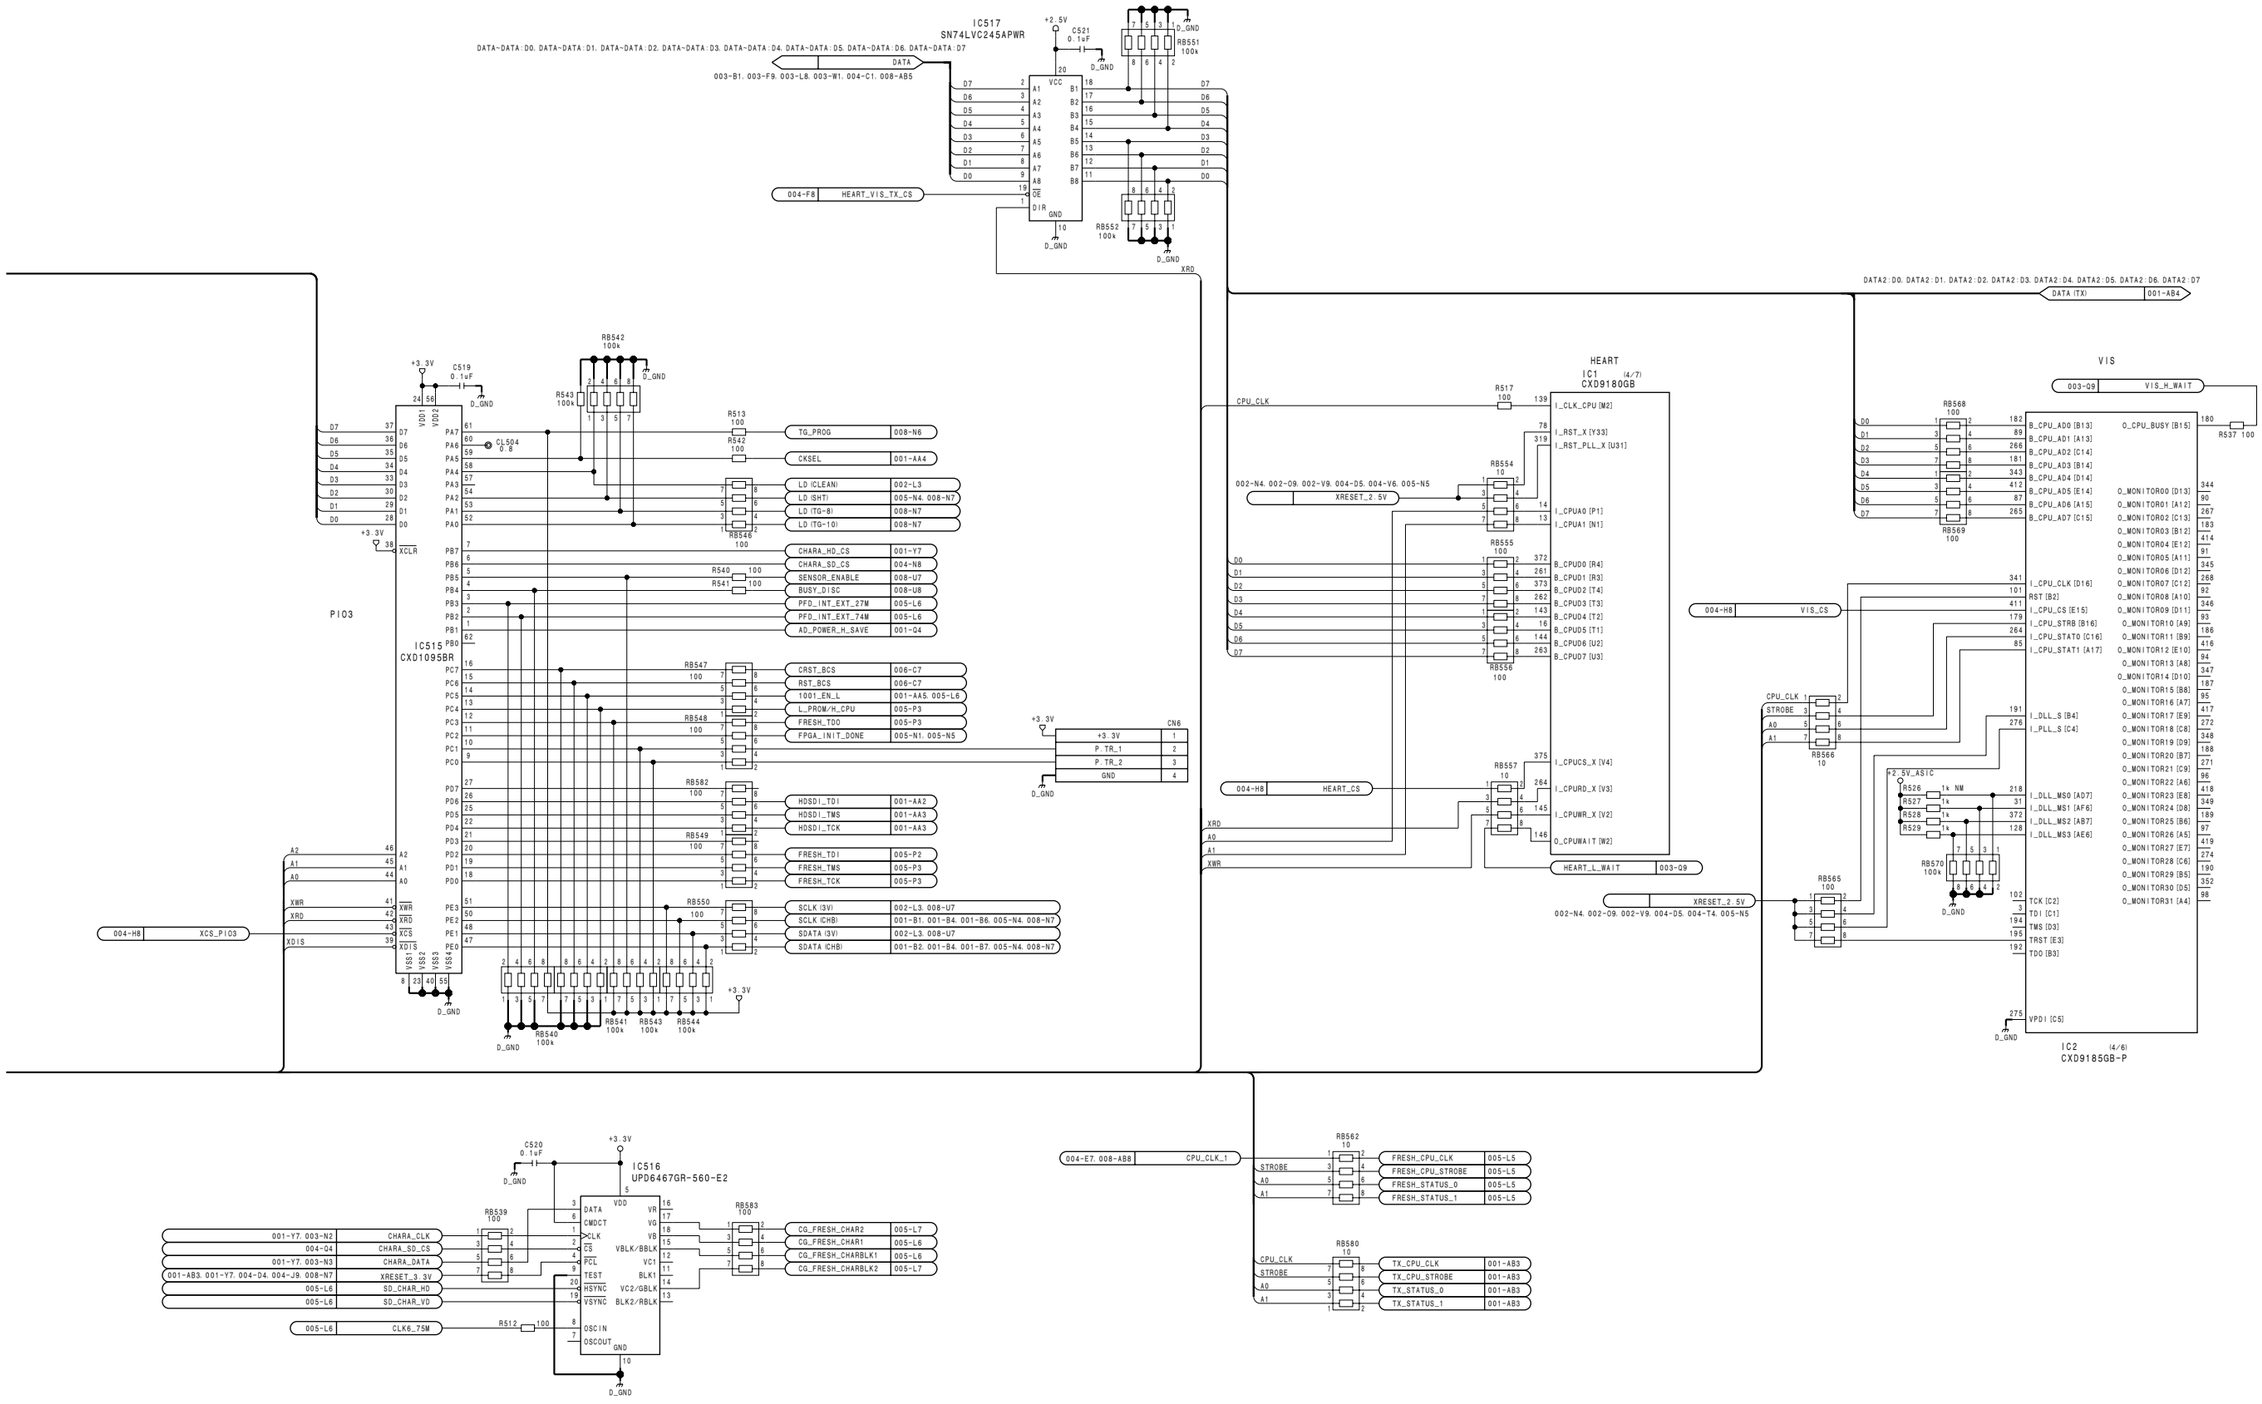

DCP-37 (4/8)
BOARD NO. 1-869-485-12
PDW-F330K_DCP-37_122_4

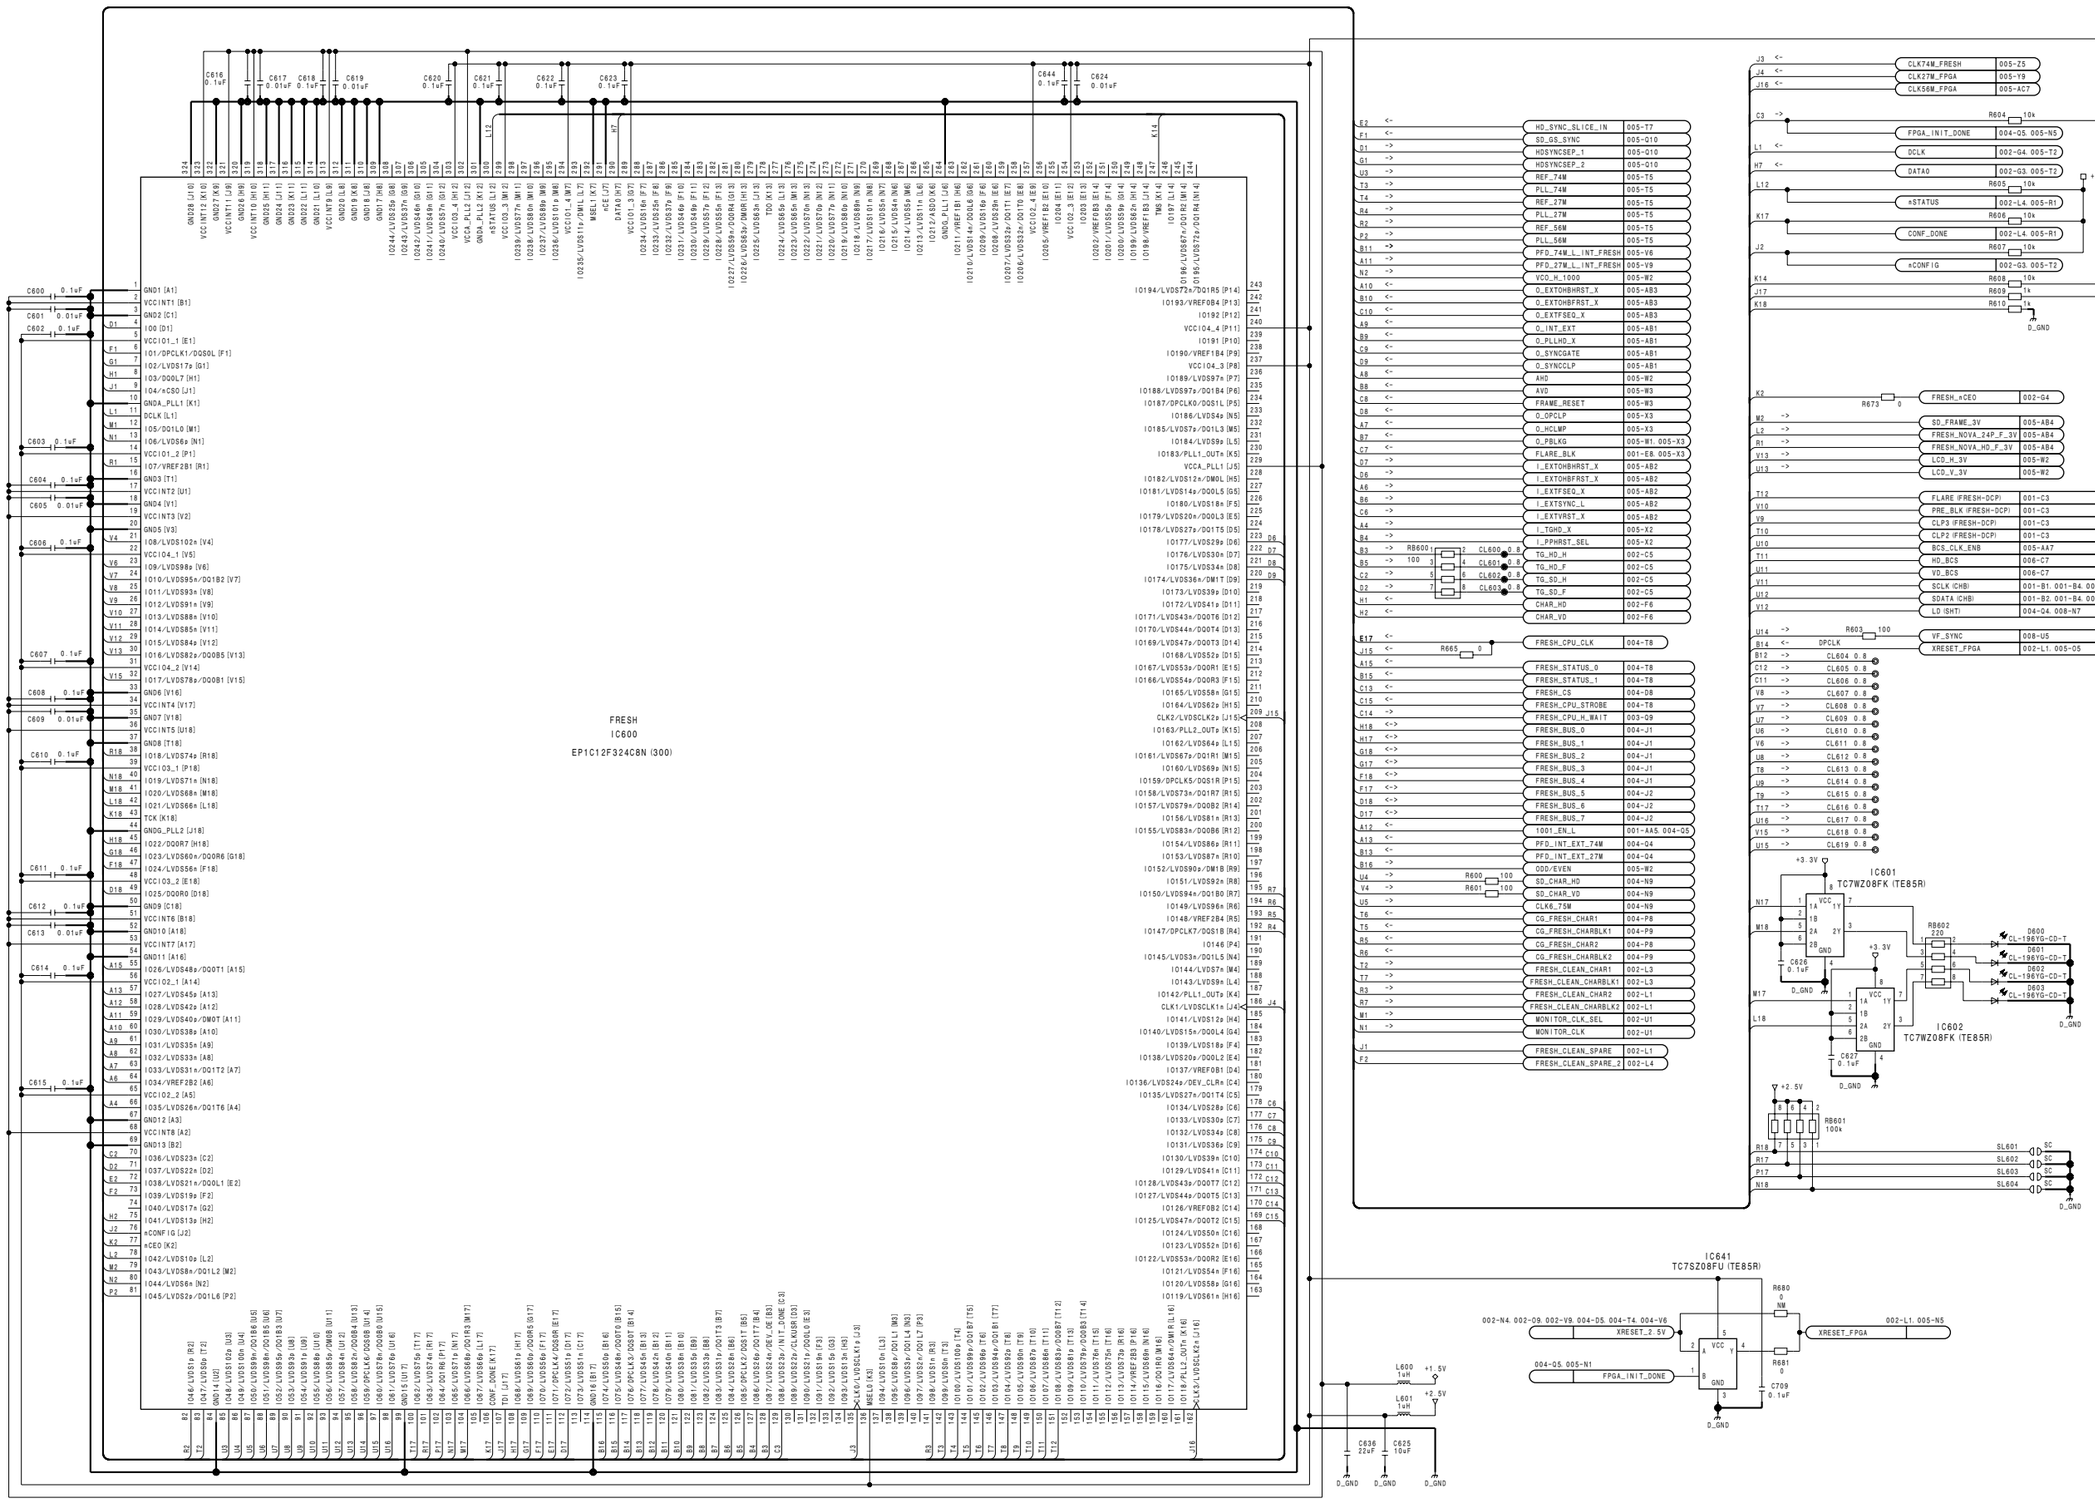
FRESH
IC600
EP1C12F324C8N (300)
IC601
TC7WZ08FK (TE85R)
IC602
TC7WZ08FK (TE85R)
IC641
TC7SZ08FU (TE85R)
+3.3V
+2.5V
+1.5V
D_GND
CLK74M_FRESH
CLK27M_FPGA
CLK56M_FPGA
FPGA_INIT_DONE
DCLK
DATA0
nSTATUS
CONF_DONE
nCONFIG
FRESH_nCEO
SD_FRAME_3V
FRESH_NOVA_24P_F_3V
FRESH_NOVA_HD_F_3V
LCD_H_3V
LCD_V_3V
FLARE (FRESH-DCP)
PRE_BLK (FRESH-DCP)
CLP3 (FRESH-DCP)
CLP2 (FRESH-DCP)
BCS_CLK_ENB
HD_BCS
VD_BCS
SCLK (CHB)
SDATA (CHB)
LD (SHT)
VF_SYNC
XRESET_FPGA
HD_SYNC_SLICE_IN
SD_GS_SYNC
HDSYNCSEP_1
HDSYNCSEP_2
REF_74M
PLL_74M
REF_27M
PLL_27M
REF_56M
PLL_56M
PFD_74M_L_INT_FRESH
PFD_27M_L_INT_FRESH
VCO_H_1000
O_EXTOHBHRST_X
O_EXTOHBFRST_X
O_EXTFSEQ_X
O_INT_EXT
O_PLLHD_X
O_SYNCGATE
O_SYNCCLP
AHD
AVD
FRAME_RESET
O_OPCLP
O_HCLMP
O_PBLKG
FLARE_BLK
I_EXTOHBHRST_X
I_EXTOHBFRST_X
I_EXTFSEQ_X
I_EXTSYNC_L
I_EXTVRST_X
I_TGHD_X
I_PPHRST_SEL
TG_HD_H
TG_HD_F
TG_SD_H
TG_SD_F
CHAR_HD
CHAR_VD
FRESH_CPU_CLK
FRESH_STATUS_0
FRESH_STATUS_1
FRESH_CS
FRESH_CPU_STROBE
FRESH_CPU_H_WAIT
FRESH_BUS_0
FRESH_BUS_1
FRESH_BUS_2
FRESH_BUS_3
FRESH_BUS_4
FRESH_BUS_5
FRESH_BUS_6
FRESH_BUS_7
1001_EN_L
PFD_INT_EXT_74M
PFD_INT_EXT_27M
ODD/EVEN
SD_CHAR_HD
SD_CHAR_VD
CLK6_75M
CG_FRESH_CHAR1
CG_FRESH_CHARBLK1
CG_FRESH_CHAR2
CG_FRESH_CHARBLK2
FRESH_CLEAN_CHAR1
FRESH_CLEAN_CHARBLK1
FRESH_CLEAN_CHAR2
FRESH_CLEAN_CHARBLK2
MONITOR_CLK_SEL
MONITOR_CLK
FRESH_CLEAN_SPARE
FRESH_CLEAN_SPARE_2
002-N4. 002-D9. 002-V9. 004-D5. 004-T4. 004-V6
004-Q5. 005-N1

DCP-37 (5/8)
SUFFIX: -12

DCP-37 (5/8)
SUFFIX: -12

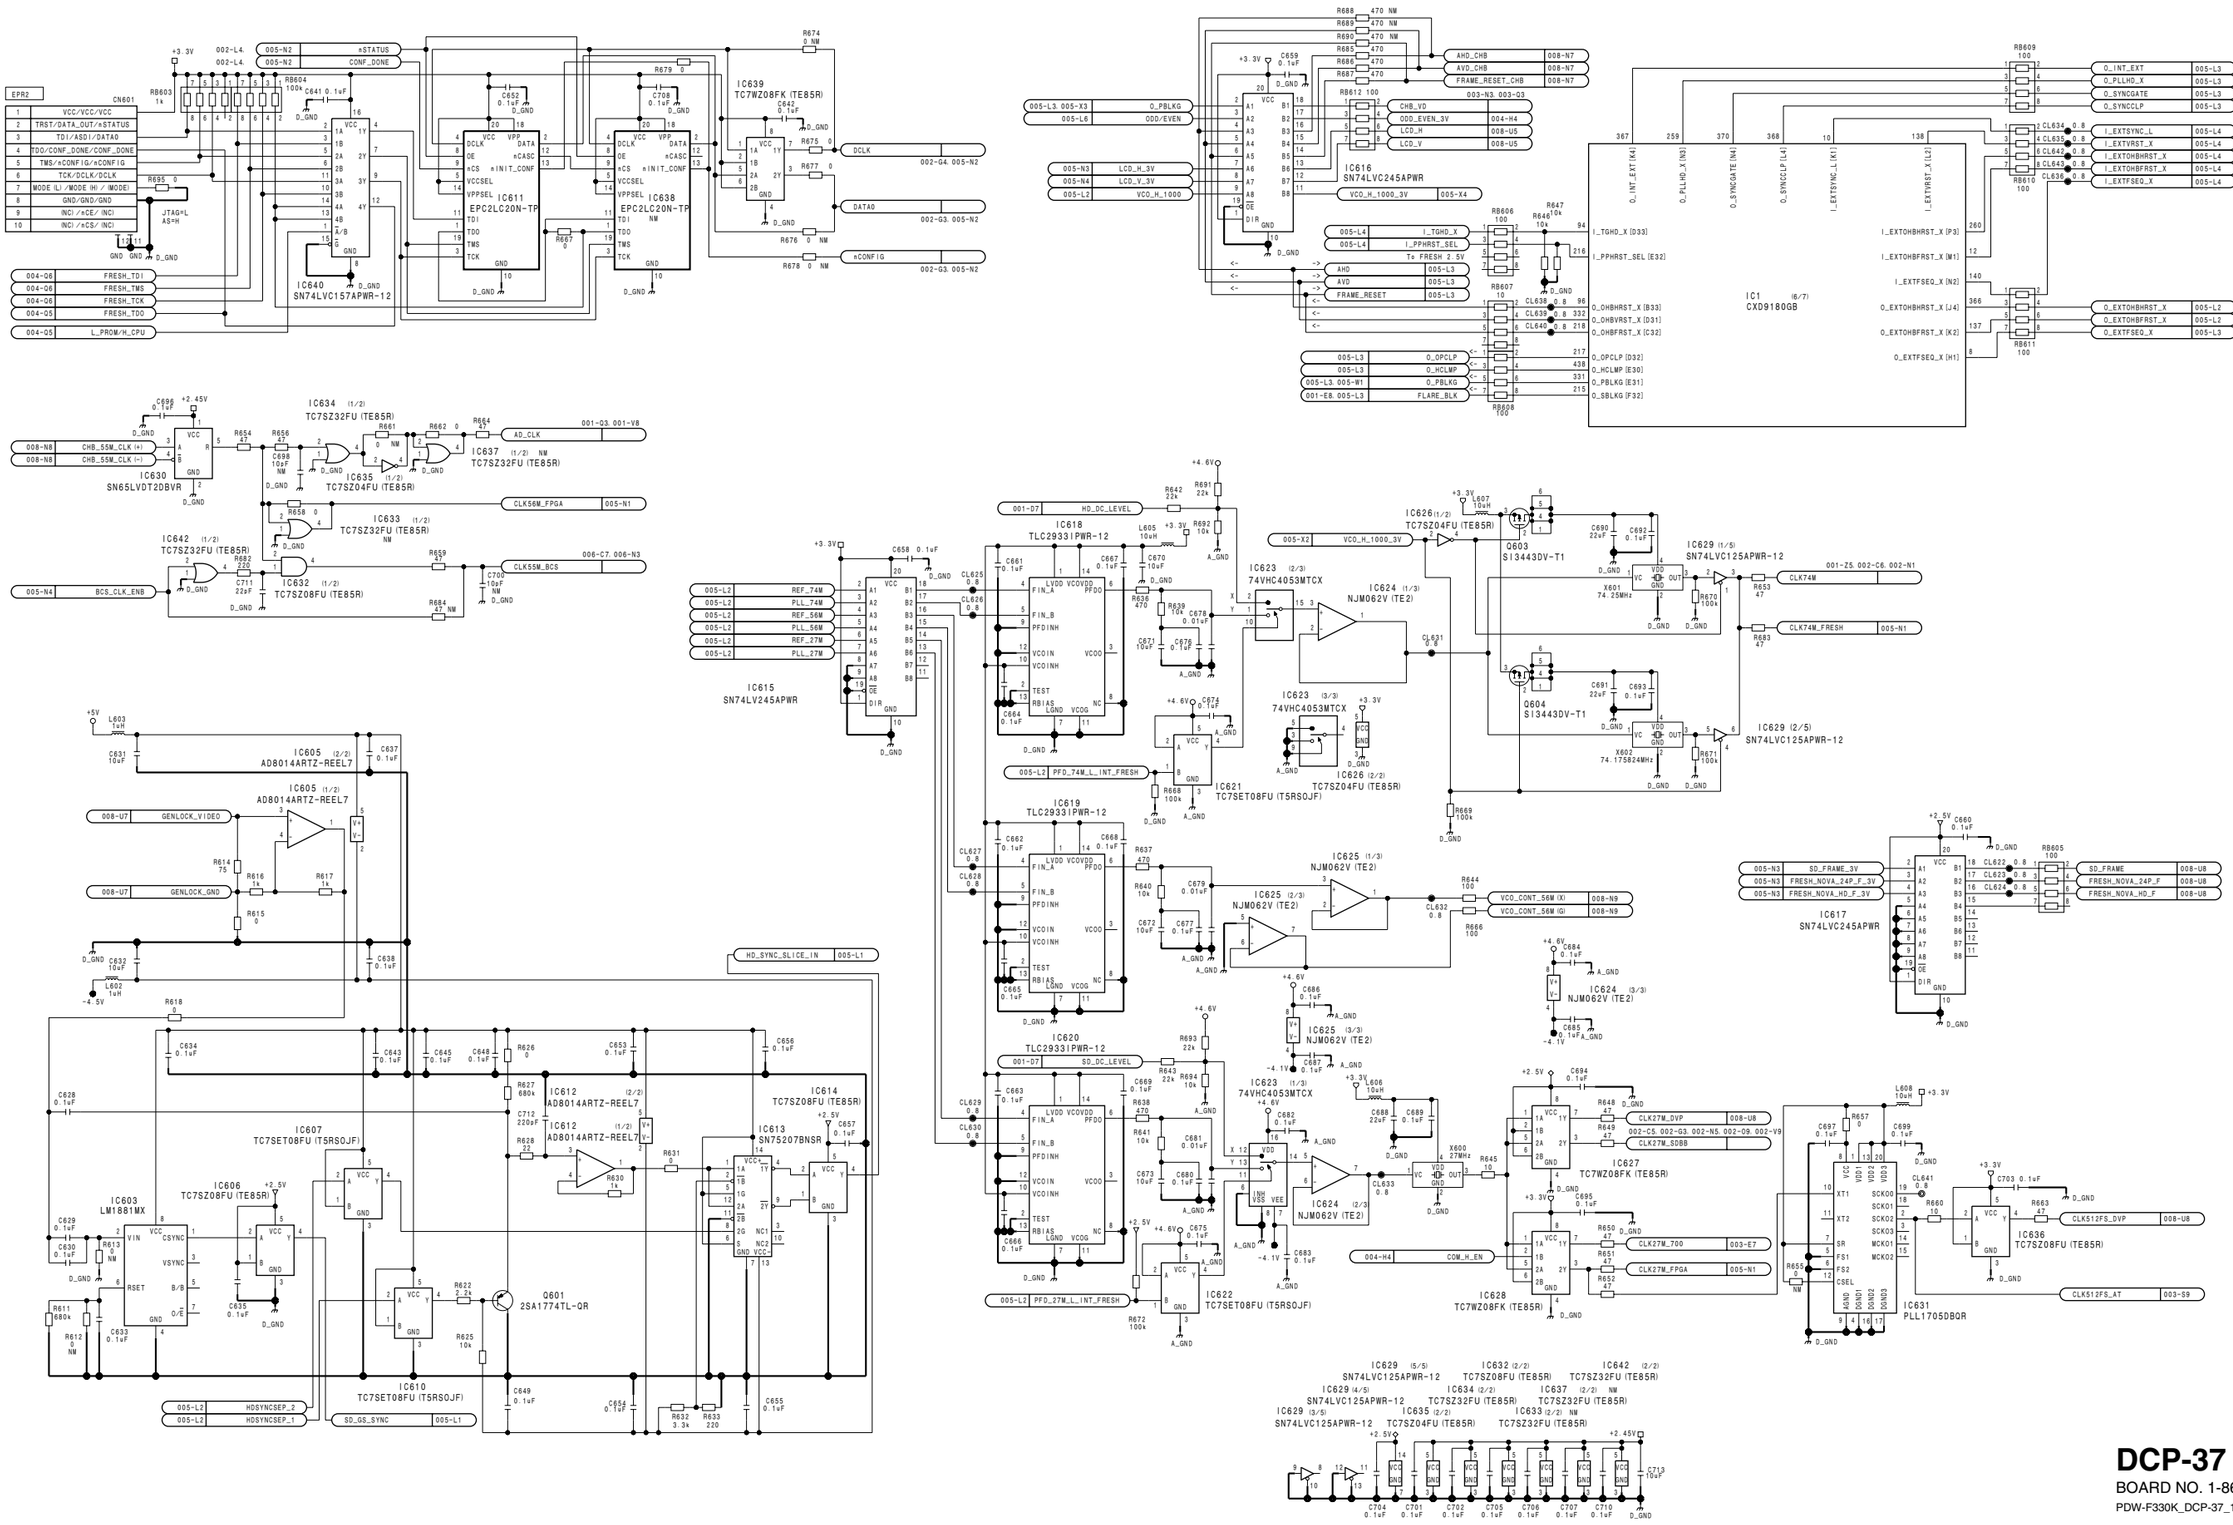

DCP-37 (5/8)
BOARD NO. 1-869-485-12
PDW-F330K_DCP-37_122_5

DCP-37 (6/8)
SUFFIX: -12

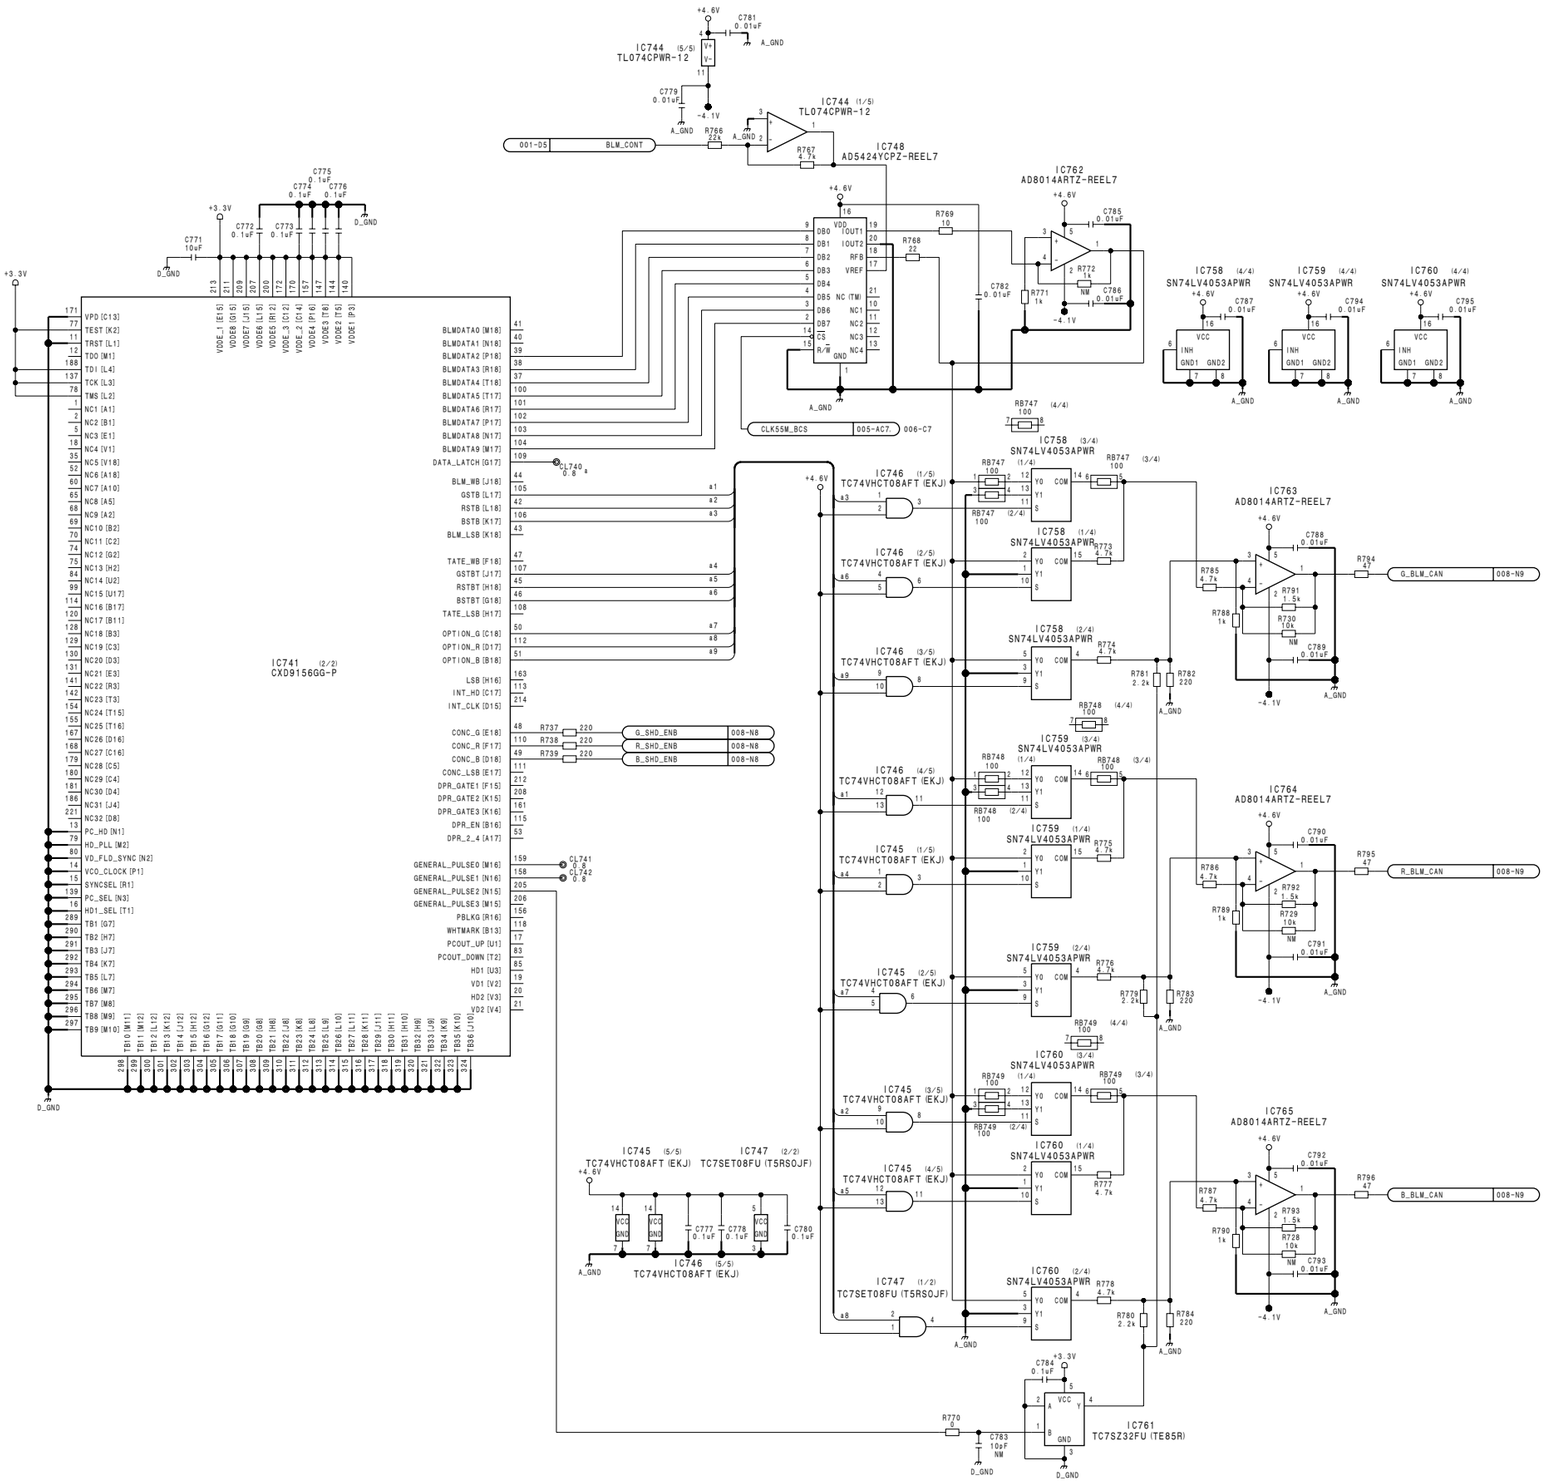

4-18

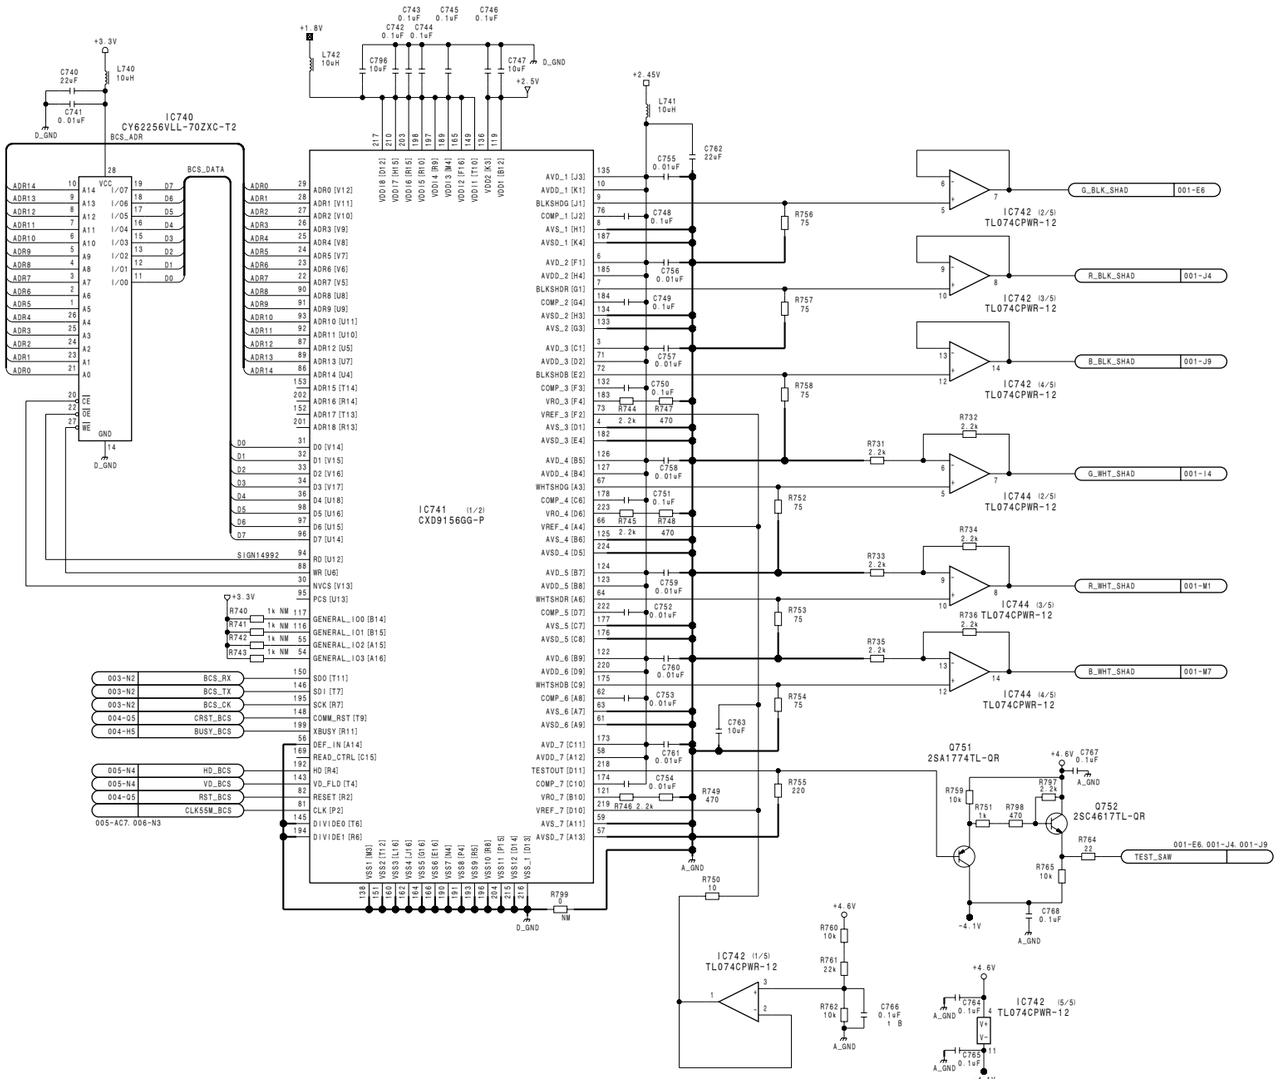

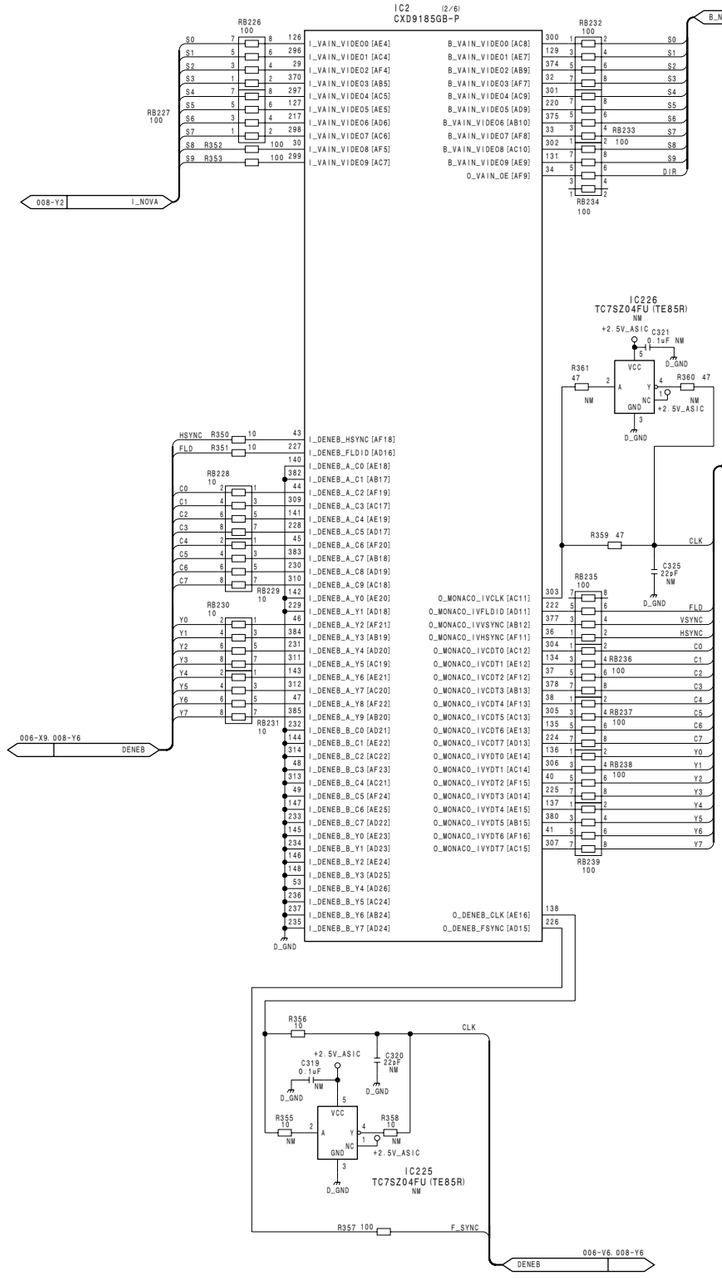

DCP-37 (6/8)
BOARD NO. 1-869-485-12
PDW-F330K_DCP-37_122_6

DCP-37 (7/8)
SUFFIX: -12

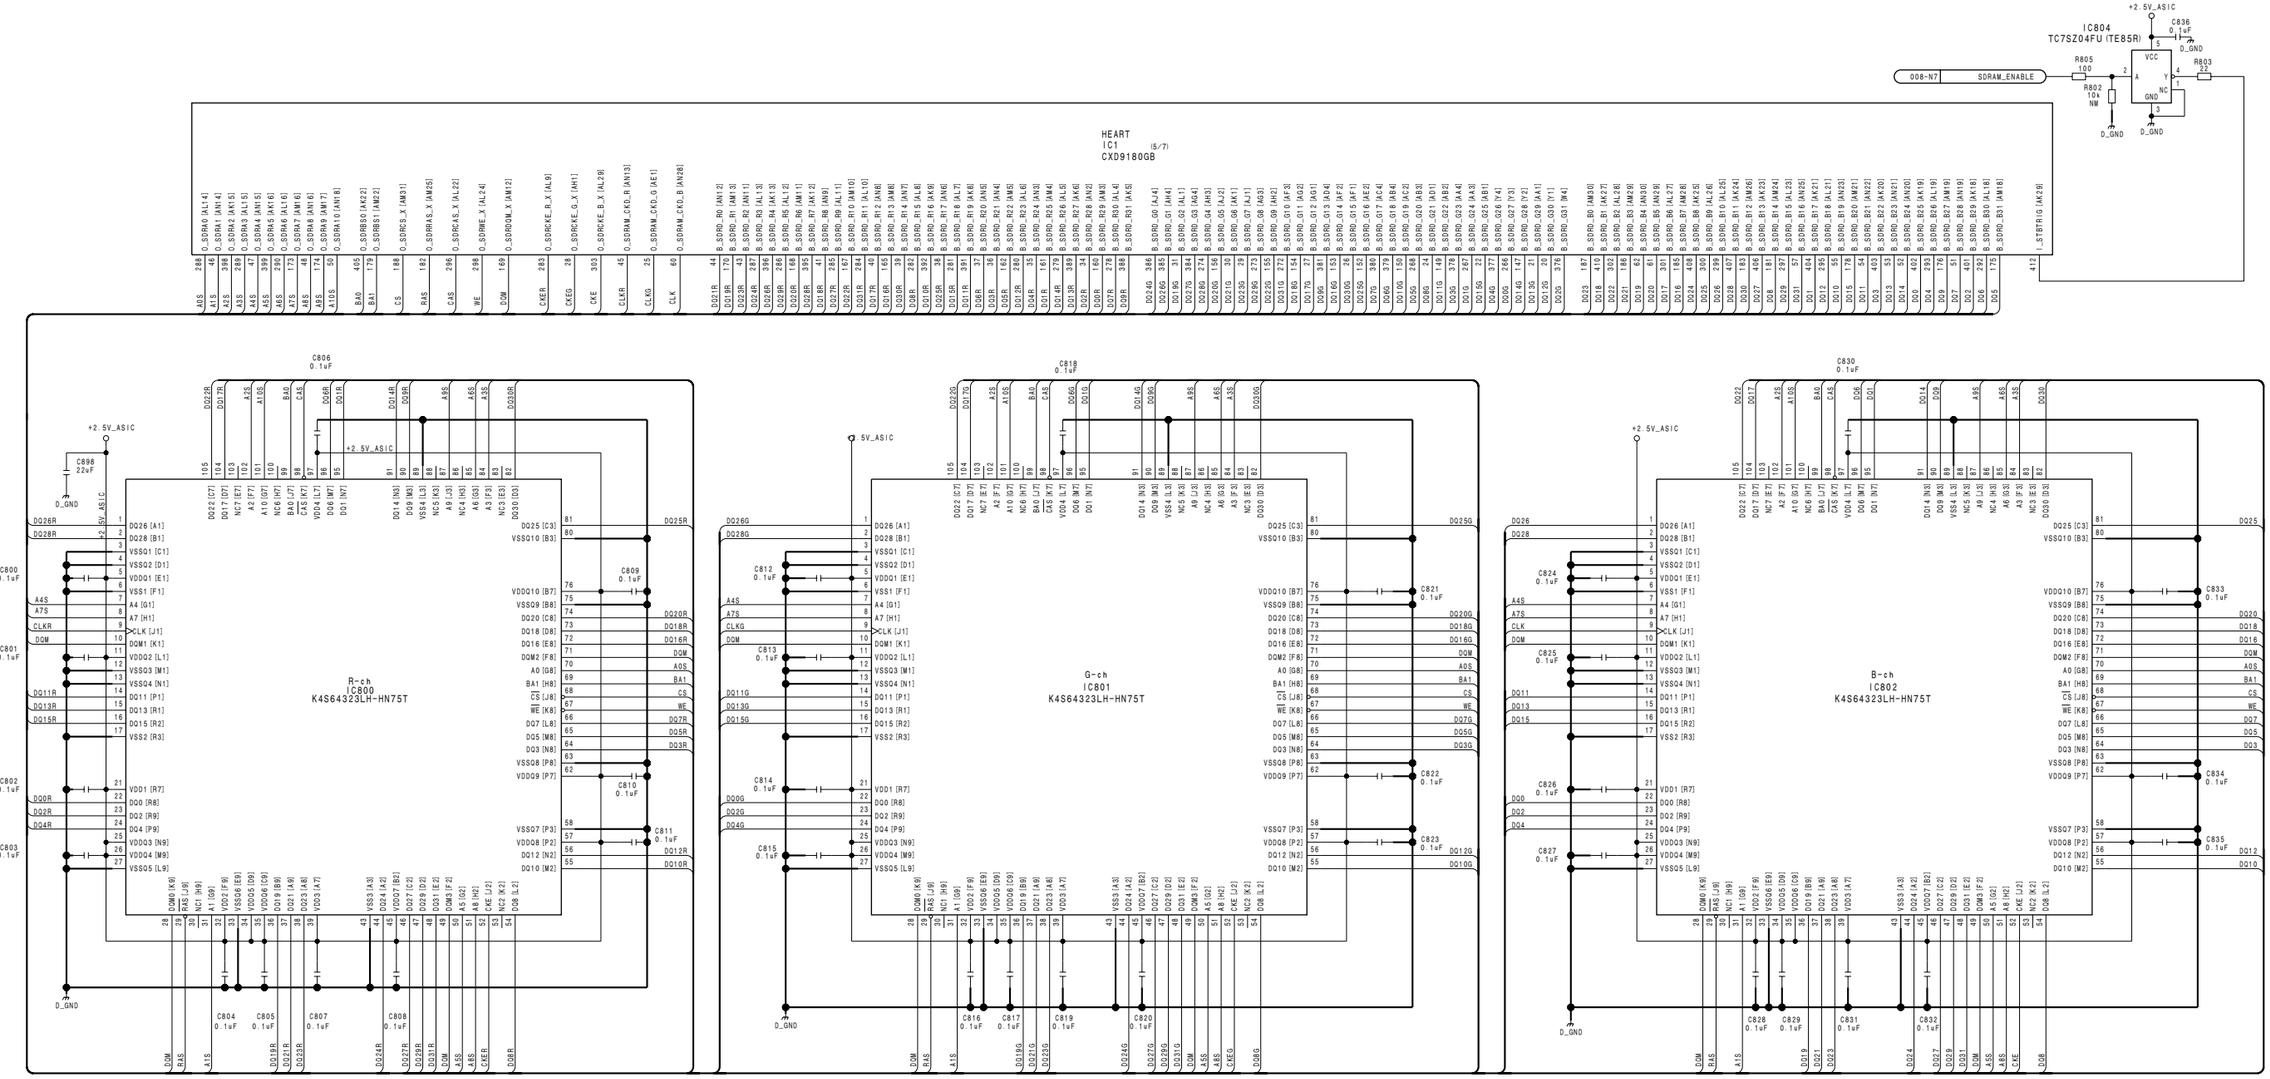

4-20

DCP-37 (7/8)
SUFFIX: -12

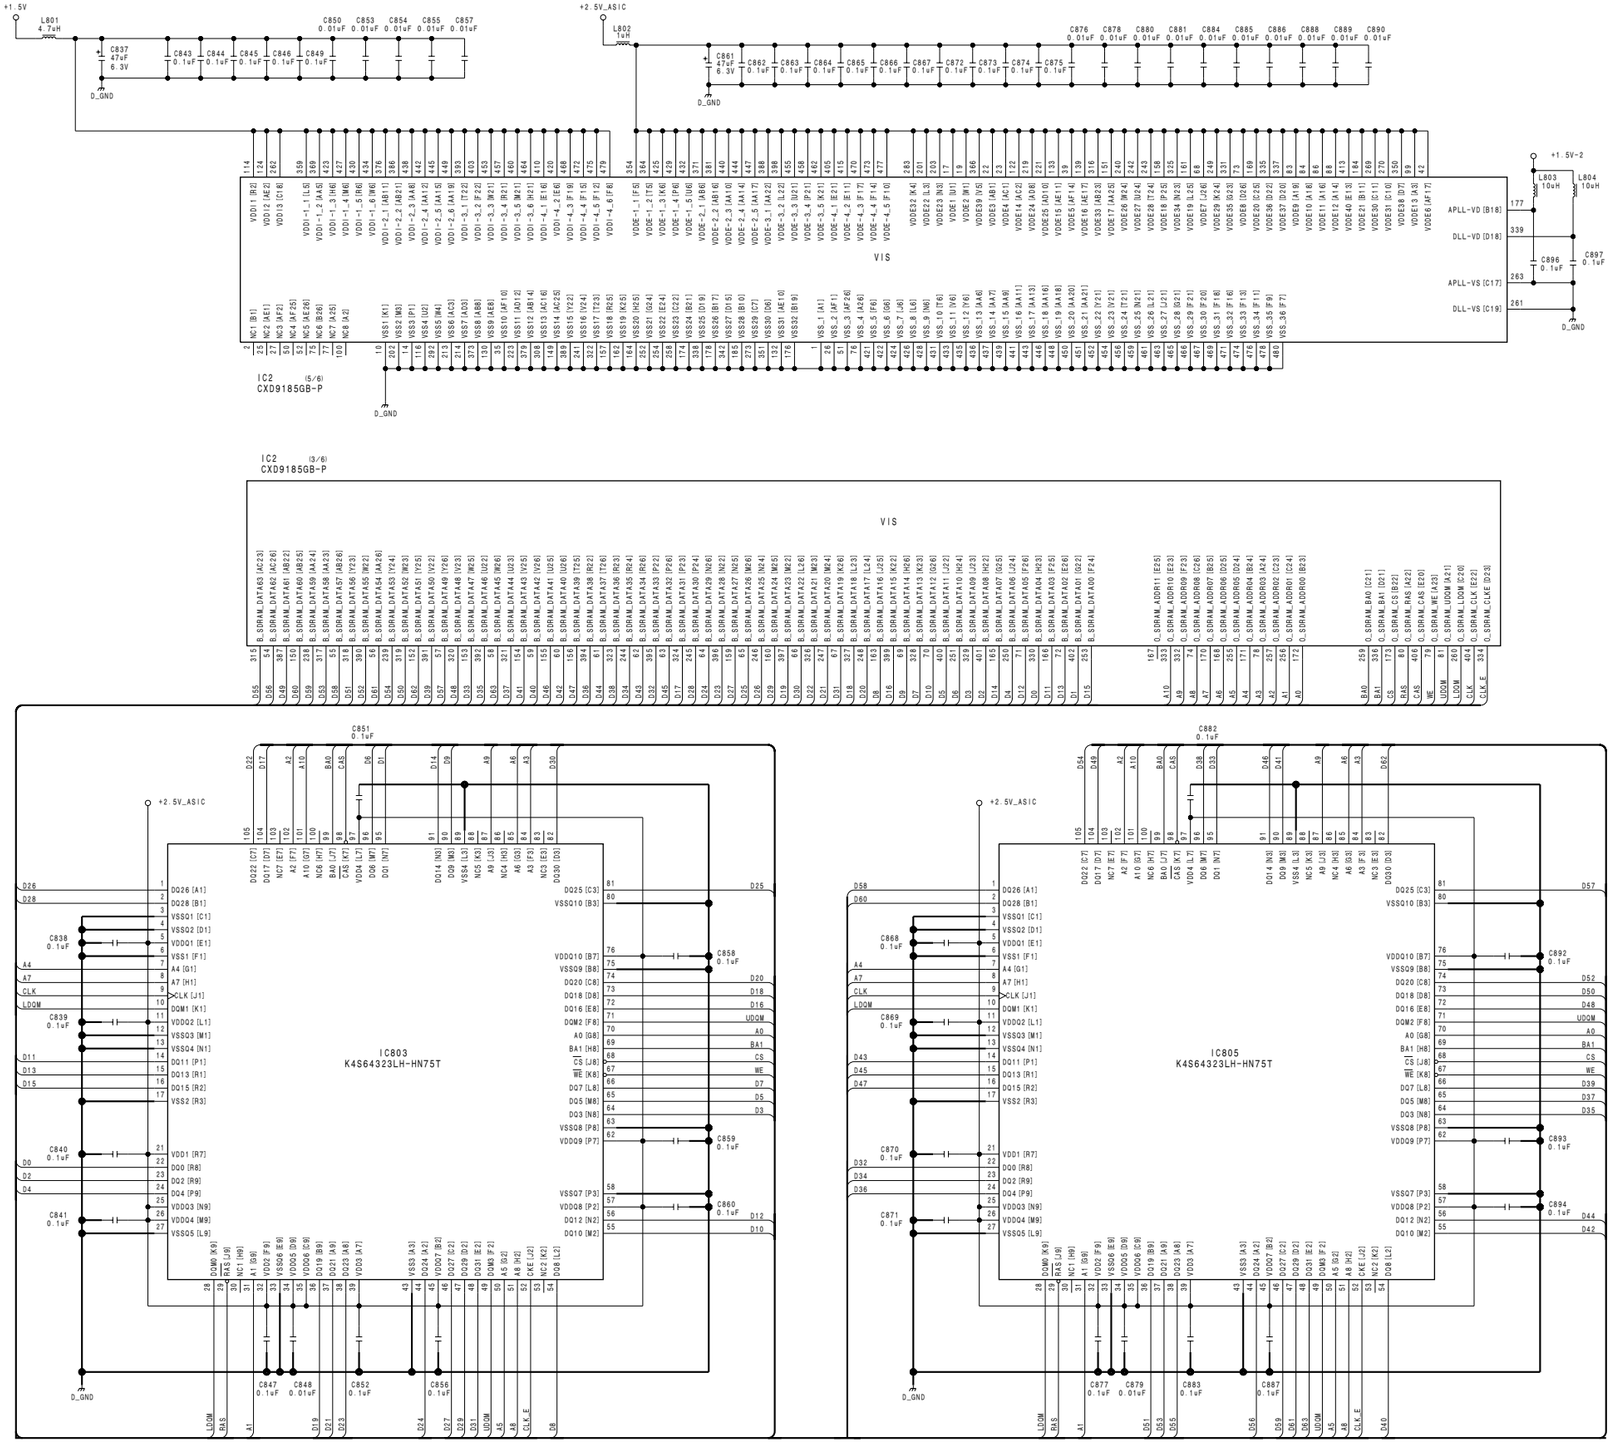

DCP-37 (8/8)
SUFFIX: -12

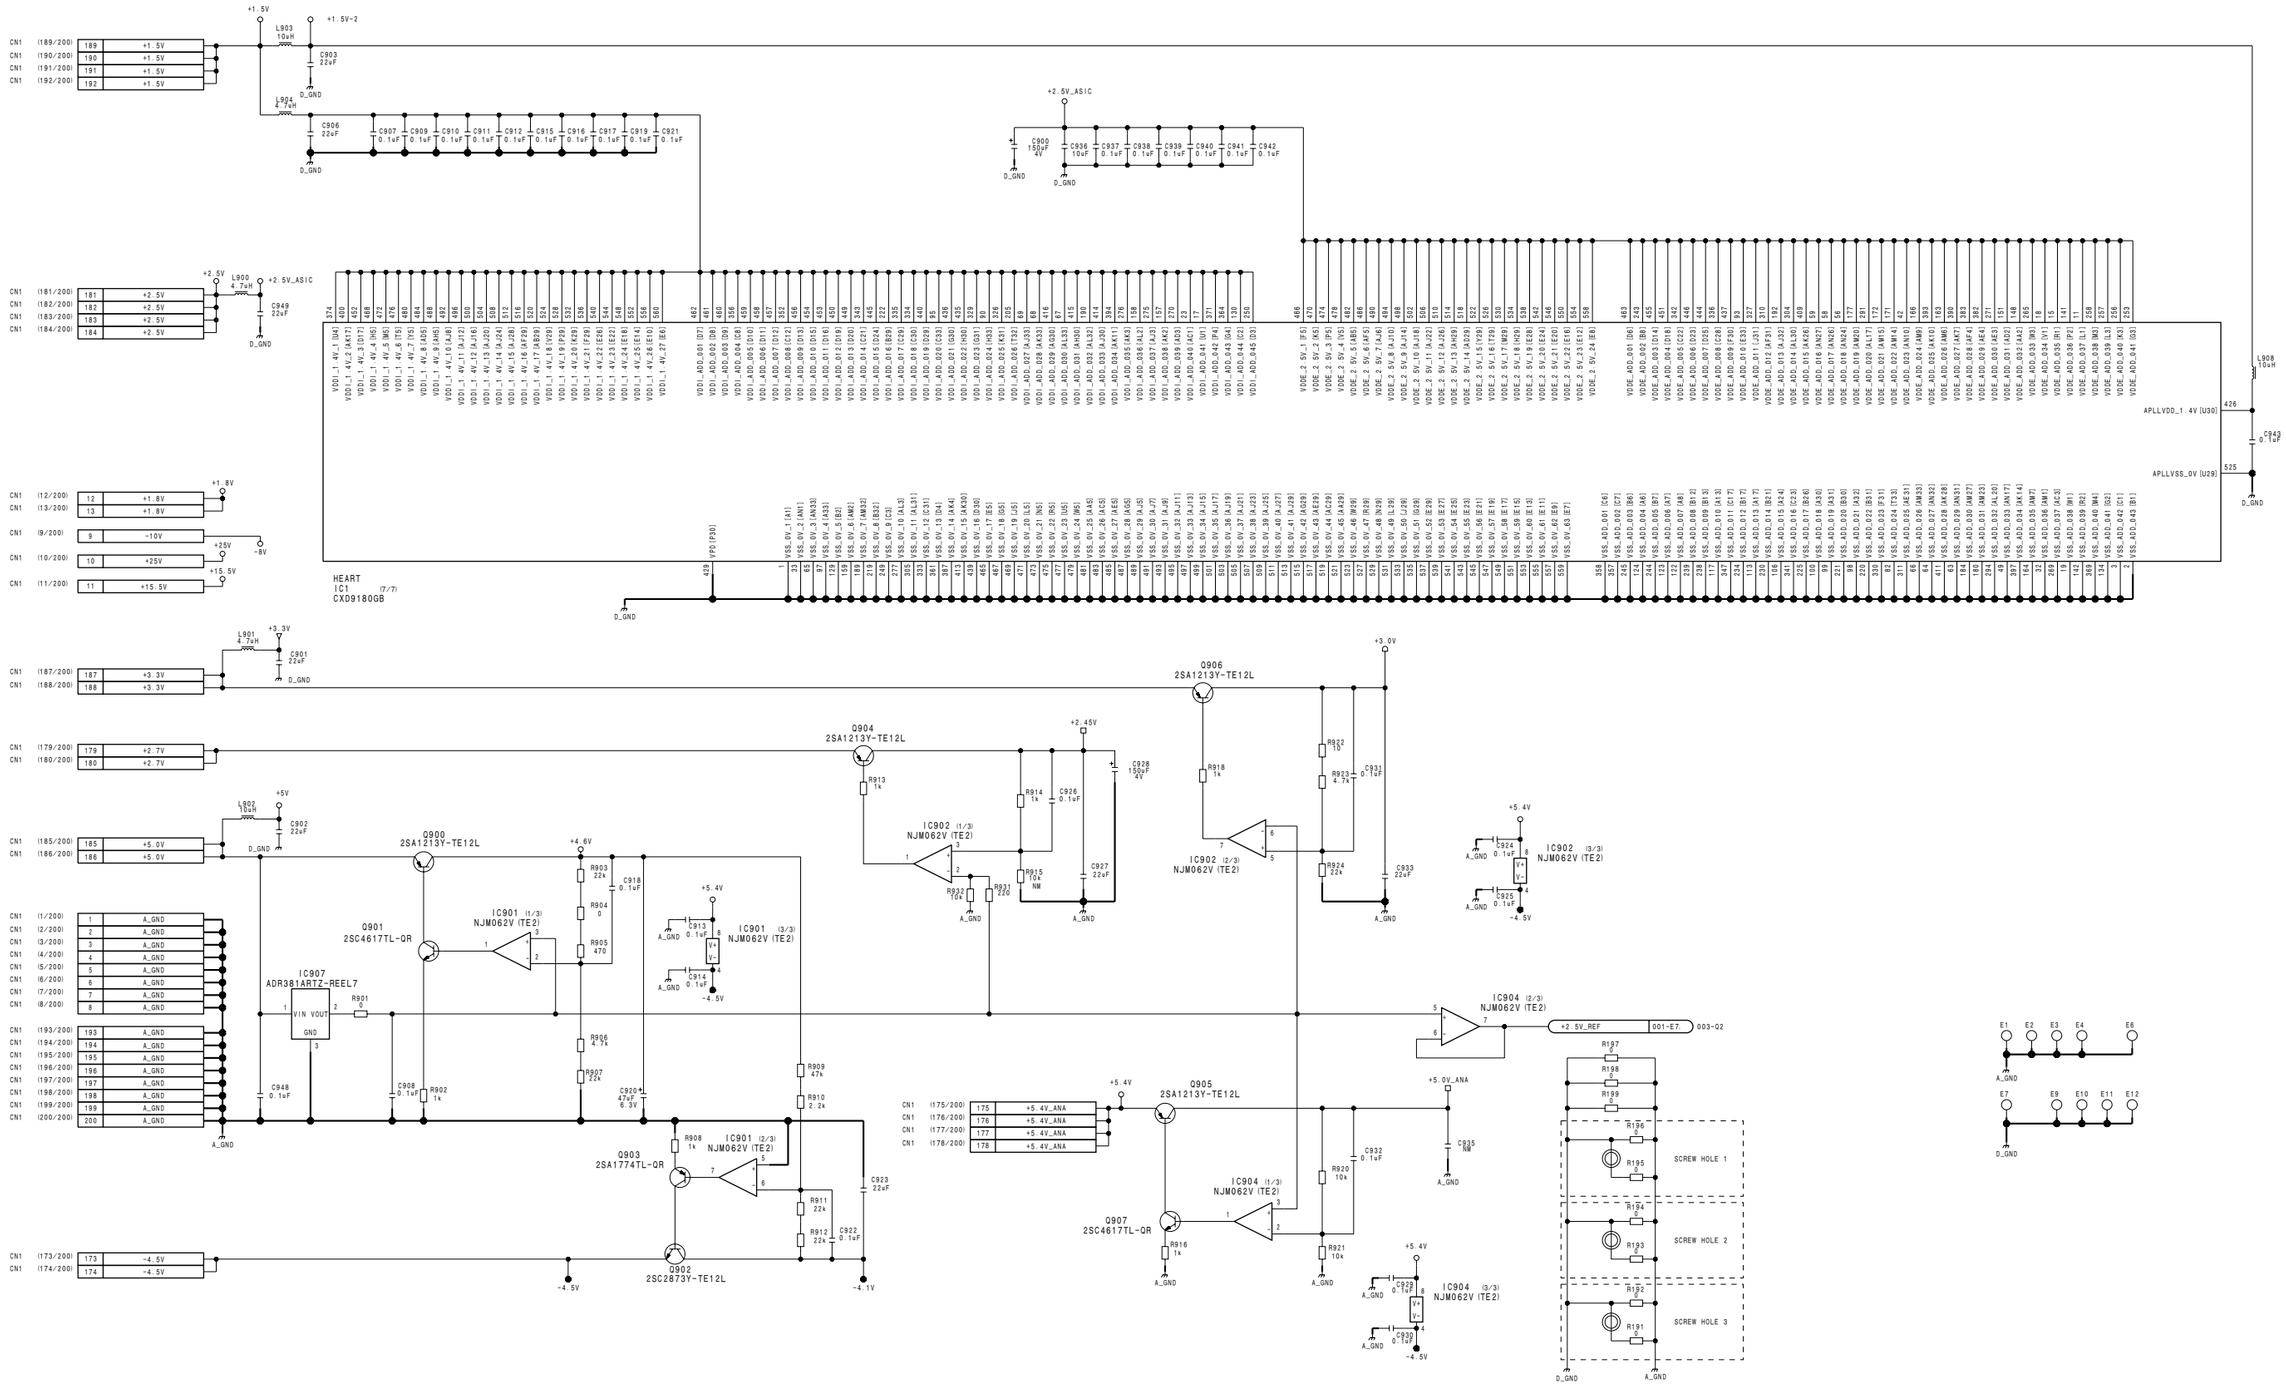

DCP-37 (8/8)
SUFFIX: -12

CN3	(1/45)	1	TG_PROG	TG_PROG	004-G3
CN3	(2/45)	2	TG_INT	TG_INIT	004-M4
CN3	(3/45)	3	TG_DONE	TG_DONE	004-M4
CN3	(4/45)	4	TG_CLK	TG_CLK	004-J10
CN3	(5/45)	5	D0	D0	
CN3	(6/45)	6	D1	D1	
CN3	(7/45)	7	D2	D2	
CN3	(8/45)	8	D3	D3	
CN3	(9/45)	9	D4	D4	
CN3	(10/45)	10	D5	D5	
CN3	(11/45)	11	D6	D6	
CN3	(12/45)	12	D7	D7	
CN3	(13/45)	13	RESET	TG_DATA	004-H1
CN3	(14/45)	14	NC	XRESET_3.3V	001-AB3. 001-Y7. 004-D4. 004-J9. 004-N9
CN3	(15/45)	15	LD (SHT)	LD (SHT)	004-G4. 005-N4
CN3	(16/45)	16	LD (TG-B)	LD (TG-B)	004-G4
CN3	(17/45)	17	LD (TG10-1)	LD (TG-10)	004-G4
CN3	(18/45)	18	SCL (CHB)	SCLK (CHB)	001-B1. 001-B4. 001-B6. 004-G6. 005-N4
CN3	(19/45)	19	SDA (CHB)	SDATA (CHB)	001-B2. 001-B4. 001-B7. 004-G6. 005-N4
CN3	(20/45)	20	AVD	AVD_CHB	005-X1
CN3	(21/45)	21	AHD	AHD_CHB	005-X1
CN3	(22/45)	22	FRAME_RESET	FRAME_RESET_CHB	005-X1
CN3	(23/45)	23	SDRAM_ENABLE	SDRAM_ENABLE	007-N2
CN3	(24/45)	24	MASTER_CLK (+)	CHB_55M_CLK (+)	005-AA6
CN3	(25/45)	25	MASTER_CLK (-)	CHB_55M_CLK (-)	005-AA7
CN3	(26/45)	26	NC		
CN3	(27/45)	27	+25V	+25V	
CN3	(28/45)	28	NC		
CN3	(29/45)	29	B_SHD_ENB	B_SHD_ENB	006-M5
CN3	(30/45)	30	G_SHD_ENB	G_SHD_ENB	006-M5
CN3	(31/45)	31	R_SHD_ENB	R_SHD_ENB	006-M5
CN3	(32/45)	32	SCL (EEP)	SCL (CHB) _I2C	004-H7
CN3	(33/45)	33	SDA (EEP)	SDA (CHB) _I2C	004-H7
CN3	(34/45)	34	-4.1V	-4.1V	
CN3	(35/45)	35	-8V	-8V	
CN3	(36/45)	36	A_GND		
CN3	(37/45)	37	TEMP_B	TEMP_B	003-H1
CN3	(38/45)	38	TEMP_G	TEMP_G	003-H1
CN3	(39/45)	39	TEMP_R	TEMP_R	003-H2
CN3	(40/45)	40	B_BLW_CAN	B_BLW_CAN	006-G6
CN3	(41/45)	41	G_BLW_CAN	G_BLW_CAN	006-G4
CN3	(42/45)	42	R_BLW_CAN	R_BLW_CAN	006-G6
CN3	(43/45)	43	VCOCNT (+)	VCO_CONT_56M (X)	005-Y6
CN3	(44/45)	44	VCOCNT (-)	VCO_CONT_56M (G)	005-Y7
CN3	(45/45)	45	A_GND		

CN1	(14/200)	14	A_GND		
CN1	(15/200)	15	A_GND		
CN1	(16/200)	16	A_GND		
CN1	(17/200)	17	A_GND		
CN1	(18/200)	18	A_GND		
CN1	(19/200)	19	A_GND		
CN1	(20/200)	20	AT_SENCE_DATA	AT_SENCE_DATA	003-N3
CN1	(21/200)	21	LENS_IRIS_POSI	IRIS_POS	003-I3
CN1	(22/200)	22	LENS_IRIS_CONT	LENS_IRIS_CONT	001-F2
CN1	(23/200)	23	SENCE_AT_DATA	SENCE_AT_DATA	003-N3
CN1	(24/200)	24	LENS_RX	LENS_RX	003-L1
CN1	(25/200)	25	LENS_TX	LENS_TX	003-L3
CN1	(26/200)	26	GYRO_H	GYRO_H	003-I3
CN1	(27/200)	27	GYRO_V	GYRO_V	003-I4
CN1	(28/200)	28	ZOOM_POSITION	ZOOM_POSITION	003-I5
CN1	(29/200)	29	RM_TX_+	TX_+	003-J7
CN1	(30/200)	30	RM_TX_-	TX_-	003-J6
CN1	(31/200)	31	RM_RX_+	RX_+	003-B5. 003-G9
CN1	(32/200)	32	RM_RX_-	RX_-	003-B6
CN1	(33/200)	33	TERMINATE_TX	TERMINAL_TX	003-B8
CN1	(34/200)	34	TERMINATE_RX	TERMINAL_RX	003-B9
CN1	(35/200)	35	CNB_Y_VIDEO	CNB_Y_VIDEO	002-W3
CN1	(36/200)	36	CNB_Y_GND	CNB_Y_GND	002-W3
CN1	(37/200)	37	CNB_Pb_VIDEO	CNB_Pb_VIDEO	002-U4
CN1	(38/200)	38	CNB_Pb_GND	CNB_Pb_GND	002-U4
CN1	(39/200)	39	CNB_Pr_VIDEO	CNB_Pr_VIDEO	002-T5
CN1	(40/200)	40	CNB_Pr_GND	CNB_Pr_GND	002-T5
CN1	(41/200)	41	HDSDI_64FS	HDSDI_64FS	001-AA5
CN1	(42/200)	42	HDSDI_FS	HDSDI_FS	001-AA5
CN1	(43/200)	43	A_GND		
CN1	(44/200)	44	SCL (3V) _I2C	SCL (3V) _I2C	002-W9. 002-N4. 003-L6
CN1	(45/200)	45	SDA (3V) _I2C	SDA (3V) _I2C	002-N4. 002-D9. 002-V9. 003-L7
CN1	(46/200)	46	ROTARY_B	ROTARY_B	003-N9
CN1	(47/200)	47	ROTARY_A	ROTARY_A	003-N9
CN1	(48/200)	48	ROTARY_PUSH	ROTARY_PUSH	004-H3
CN1	(49/200)	49	LCD_HD	LCD_H	005-X2
CN1	(50/200)	50	LCD_VD	LCD_V	005-X2
CN1	(51/200)	51	VF_SYNC	VF_SYNC	005-N5
CN1	(52/200)	52	LCD_B_VIDEO	LCD_B_VIDEO	002-Y7
CN1	(53/200)	53	A_GND		
CN1	(54/200)	54	LCD_R_VIDEO	LCD_R_VIDEO	002-Y8
CN1	(55/200)	55	A_GND		
CN1	(56/200)	56	LCD_G_VIDEO	LCD_G_VIDEO	002-Y7
CN1	(57/200)	57	COMPOSITE_GND	COMPOSITE_GND	002-Z2
CN1	(58/200)	58	COMPOSITE_OUT	COMPOSITE_OUT	002-Z2
CN1	(59/200)	59	RM_TEST_OUT	RM_TEST_OUT	002-Z2
CN1	(60/200)	60	VF_CS	LD (VF)	004-M3
CN1	(61/200)	61	VF_PEAKING	VF_PEAKING	003-I1
CN1	(62/200)	62	VF_Pb_VIDEO	VF_Pb_VIDEO	002-S8
CN1	(63/200)	63	VF_Pr_VIDEO	VF_Pr_VIDEO	002-S9
CN1	(64/200)	64	VF_Y_VIDEO	VF_Y_VIDEO	002-S7
CN1	(65/200)	65	VF_GND		
CN1	(66/200)	66	DCP_HIGH_LIGHT_ON	DCP_HIGH_LIGHT_ON	004-M5
CN1	(67/200)	67	F_FAN_PWM	F_FAN_PWM	003-Q3
CN1	(68/200)	68	SDATA (3V)	SDATA (3V)	002-L3. 004-G6
CN1	(69/200)	69	SCLK (3V)	SCLK (3V)	002-L3. 004-G6
CN1	(70/200)	70	SENSOR_ENABLE	SENSOR_ENABLE	004-G4
CN1	(71/200)	71	GENLOCK_VIDEO	GENLOCK_VIDEO	005-Q6
CN1	(72/200)	72	GENLOCK_GND	GENLOCK_GND	005-Q6
CN1	(73/200)	73	HDSDI_AUD3/4	HDSDI_AUD3/4	001-AA5
CN1	(74/200)	74	HDSDI_AUD1/2	HDSDI_AUD1/2	001-AA5
CN1	(75/200)	75	D_GND		
CN1	(76/200)	76	D_GND		
CN1	(77/200)	77	9P_AT_SS	9P_AT_SS	003-H5
CN1	(78/200)	78	9P_SS_AT	9P_SS_AT	003-G8
CN1	(79/200)	79	DVP_AT_CS	INTR_DISC	003-L2
CN1	(80/200)	80	AT_DVP_L_BUSY	BUSY_DISC	004-G4
CN1	(81/200)	81	AT_DVP_SCK_DISC	SCK_DISC	003-N2
CN1	(82/200)	82	DVP_AT_RXD_DISC	RXD_DISC	003-U6
CN1	(83/200)	83	AT_DVP_TXD_DISC	TXD_DISC	003-N2. 003-W3
CN1	(84/200)	84	DCP_DVP_SD_F	SD_FRAME	005-AC4
CN1	(85/200)	85	DCP_DVP_HD_F	FRESH_NOVA_HD_F	005-AC4
CN1	(86/200)	86	DCP_DVP_24P_F	FRESH_NOVA_24P_F	005-AC4
CN1	(87/200)	87	DCP_DVP_27M	CLK27M_DVP	005-Y8
CN1	(88/200)	88	DCP_DVP_27M GND		
CN1	(89/200)	89	DCP_DVP_512FS	CLK512FS_DVP	005-AB9
CN1	(90/200)	90	DCP_DVP_512FS GND		
CN1	(91/200)	91	D_GND		
CN1	(92/200)	92	D_GND		
CN1	(93/200)	93	SENSOR_CLK	SENSOR_CLK	003-N2

CN1	(94/200)	94	DCP_DVP_VAIN_DIR	I_NOVA	006-V3
CN1	(95/200)	95	DVP_DCP_OSD_D0	B_NOVA	006-Y2
CN1	(96/200)	96	DVP_DCP_OSD_D1	DIR	
CN1	(97/200)	97	DVP_DCP_OSD_D2	S0	
CN1	(98/200)	98	DVP_DCP_OSD_D3	S1	
CN1	(99/200)	99	DVP_DCP_OSD_D4	S2	
CN1	(100/200)	100	DVP_DCP_OSD_D5	S3	
CN1	(101/200)	101	DVP_DCP_OSD_D6	S4	
CN1	(102/200)	102	DVP_DCP_OSD_D7	S5	
CN1	(103/200)	103	DVP_DCP_OSD_D8	S6	
CN1	(104/200)	104	DVP_DCP_OSD_D9	S7	
CN1	(105/200)	105	D_GND	S8	
CN1	(106/200)	106	D_GND	S9	
CN1	(107/200)	107	DVP_DCP_SDV_D0	S0	
CN1	(108/200)	108	DVP_DCP_SDV_D1	S1	
CN1	(109/200)	109	DVP_DCP_SDV_D2	S2	
CN1	(110/200)	110	DVP_DCP_SDV_D3	S3	
CN1	(111/200)	111	DVP_DCP_SDV_D4	S4	
CN1	(112/200)	112	DVP_DCP_SDV_D5	S5	
CN1	(113/200)	113	DVP_DCP_SDV_D6	S6	
CN1	(114/200)	114	DVP_DCP_SDV_D7	S7	
CN1	(115/200)	115	DVP_DCP_SDV_D8	S8	
CN1	(116/200)	116	DVP_DCP_SDV_D9	S9	
CN1	(117/200)	117	D_GND	MONACO	006-Y5
CN1	(118/200)	118	D_GND	CLK	
CN1	(119/200)	119	DCP_DVP_MONACO_CLK	FLD	
CN1	(120/200)	120	DCP_DVP_MONACO_FLD1D	VSYNC	
CN1	(121/200)	121	DCP_DVP_MONACO_VD	HSYNC	
CN1	(122/200)	122	DCP_DVP_MONACO_HD	C0	
CN1	(123/200)	123	DCP_DVP_MONACO_C_0	C1	
CN1	(124/200)	124	DCP_DVP_MONACO_C_1	C2	
CN1	(125/200)	125	DCP_DVP_MONACO_C_2	C3	
CN1	(126/200)	126	DCP_DVP_MONACO_C_3	C4	
CN1	(127/200)	127	DCP_DVP_MONACO_C_4	C5	
CN1	(128/200)	128	DCP_DVP_MONACO_C_5	C6	
CN1	(129/200)	129	DCP_DVP_MONACO_C_6	C7	
CN1	(130/200)	130	DCP_DVP_MONACO_C_7		
CN1	(131/200)	131	D_GND		
CN1	(132/200)	132	D_GND	Y0	
CN1	(133/200)	133	DCP_DVP_MONACO_Y_0	Y1	
CN1	(134/200)	134	DCP_DVP_MONACO_Y_1	Y2	
CN1	(135/200)	135	DCP_DVP_MONACO_Y_2	Y3	
CN1	(136/200)	136	DCP_DVP_MONACO_Y_3	Y4	
CN1	(137/200)	137	DCP_DVP_MONACO_Y_4	Y5	
CN1	(138/200)	138	DCP_DVP_MONACO_Y_5	Y6	
CN1	(139/200)	139	DCP_DVP_MONACO_Y_6	Y7	
CN1	(140/200)	140	DCP_DVP_MONACO_Y_7	006-V6. 006-X9	
CN1	(141/200)	141	D_GND	DENEB	
CN1	(142/200)	142	D_GND	CLK	
CN1	(143/200)	143	DCP_DVP_DENEB_CLK	HSYNC	
CN1	(144/200)	144	DVP_DCP_DENEB_HSYNC	F_SYNC	
CN1	(145/200)	145	DCP_DVP_DENEB_FSYNC	FLD	
CN1	(146/200)	146	DVP_DCP_DENEB_FLD	C0	
CN1	(147/200)	147	DVP_DCP_DENEB_C_0	C1	
CN1	(148/200)	148	DVP_DCP_DENEB_C_1	C2	
CN1	(149/200)	149	DVP_DCP_DENEB_C_2	C3	
CN1	(150/200)	150	DVP_DCP_DENEB_C_3	C4	
CN1	(151/200)	151	DVP_DCP_DENEB_C_4	C5	
CN1	(152/200)	152	DVP_DCP_DENEB_C_5	C6	
CN1	(153/200)	153	DVP_DCP_DENEB_C_6	C7	
CN1	(154/200)	154	DVP_DCP_DENEB_C_7		
CN1	(155/200)	155	D_GND	Y0	
CN1	(156/200)	156	D_GND	Y1	
CN1	(157/200)	157	DVP_DCP_DENEB_Y_0	Y2	
CN1	(158/200)	158	DVP_DCP_DENEB_Y_1	Y3	
CN1	(159/200)	159	DVP_DCP_DENEB_Y_2	Y4	
CN1	(160/200)	160	DVP_DCP_DENEB_Y_3	Y5	
CN1	(161/200)	161	DVP_DCP_DENEB_Y_4	Y6	
CN1	(162/200)	162	DVP_DCP_DENEB_Y_5	Y7	
CN1	(163/200)	163	DVP_DCP_DENEB_Y_6	DCP_L_BACK_TALLY	004-M5
CN1	(164/200)	164	DVP_DCP_DENEB_Y_7	FAN_CONT_PWM	003-L3
CN1	(165/200)	165	BACK_TALLY_H_ON	FAN_L_DET	004-M4
CN1	(166/200)	166	R_FAN_PWM		
CN1	(167/200)	167	NC		
CN1	(168/200)	168	R_FAN_DET		
CN1	(169/200)	169	D_GND		
CN1	(170/200)	170	D_GND		
CN1	(171/200)	171	D_GND		
CN1	(172/200)	172	D_GND		

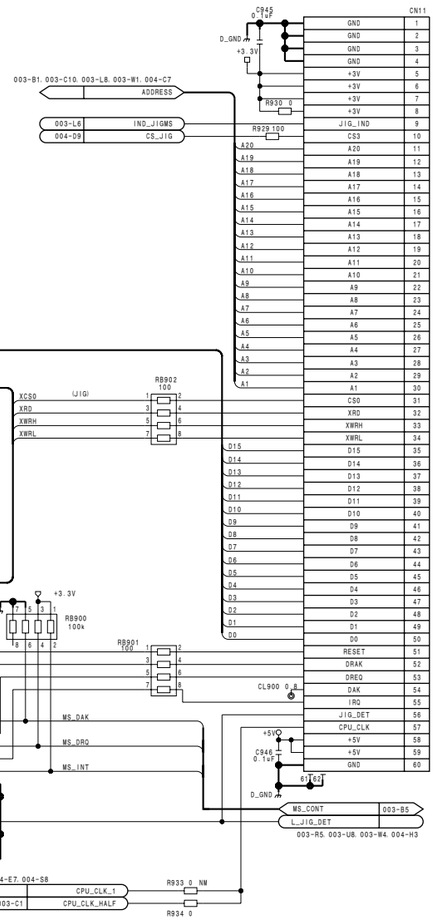

DCP-37 (8/8)
BOARD NO. 1-869-485-12
PDW-F330K_DCP-37_122_8

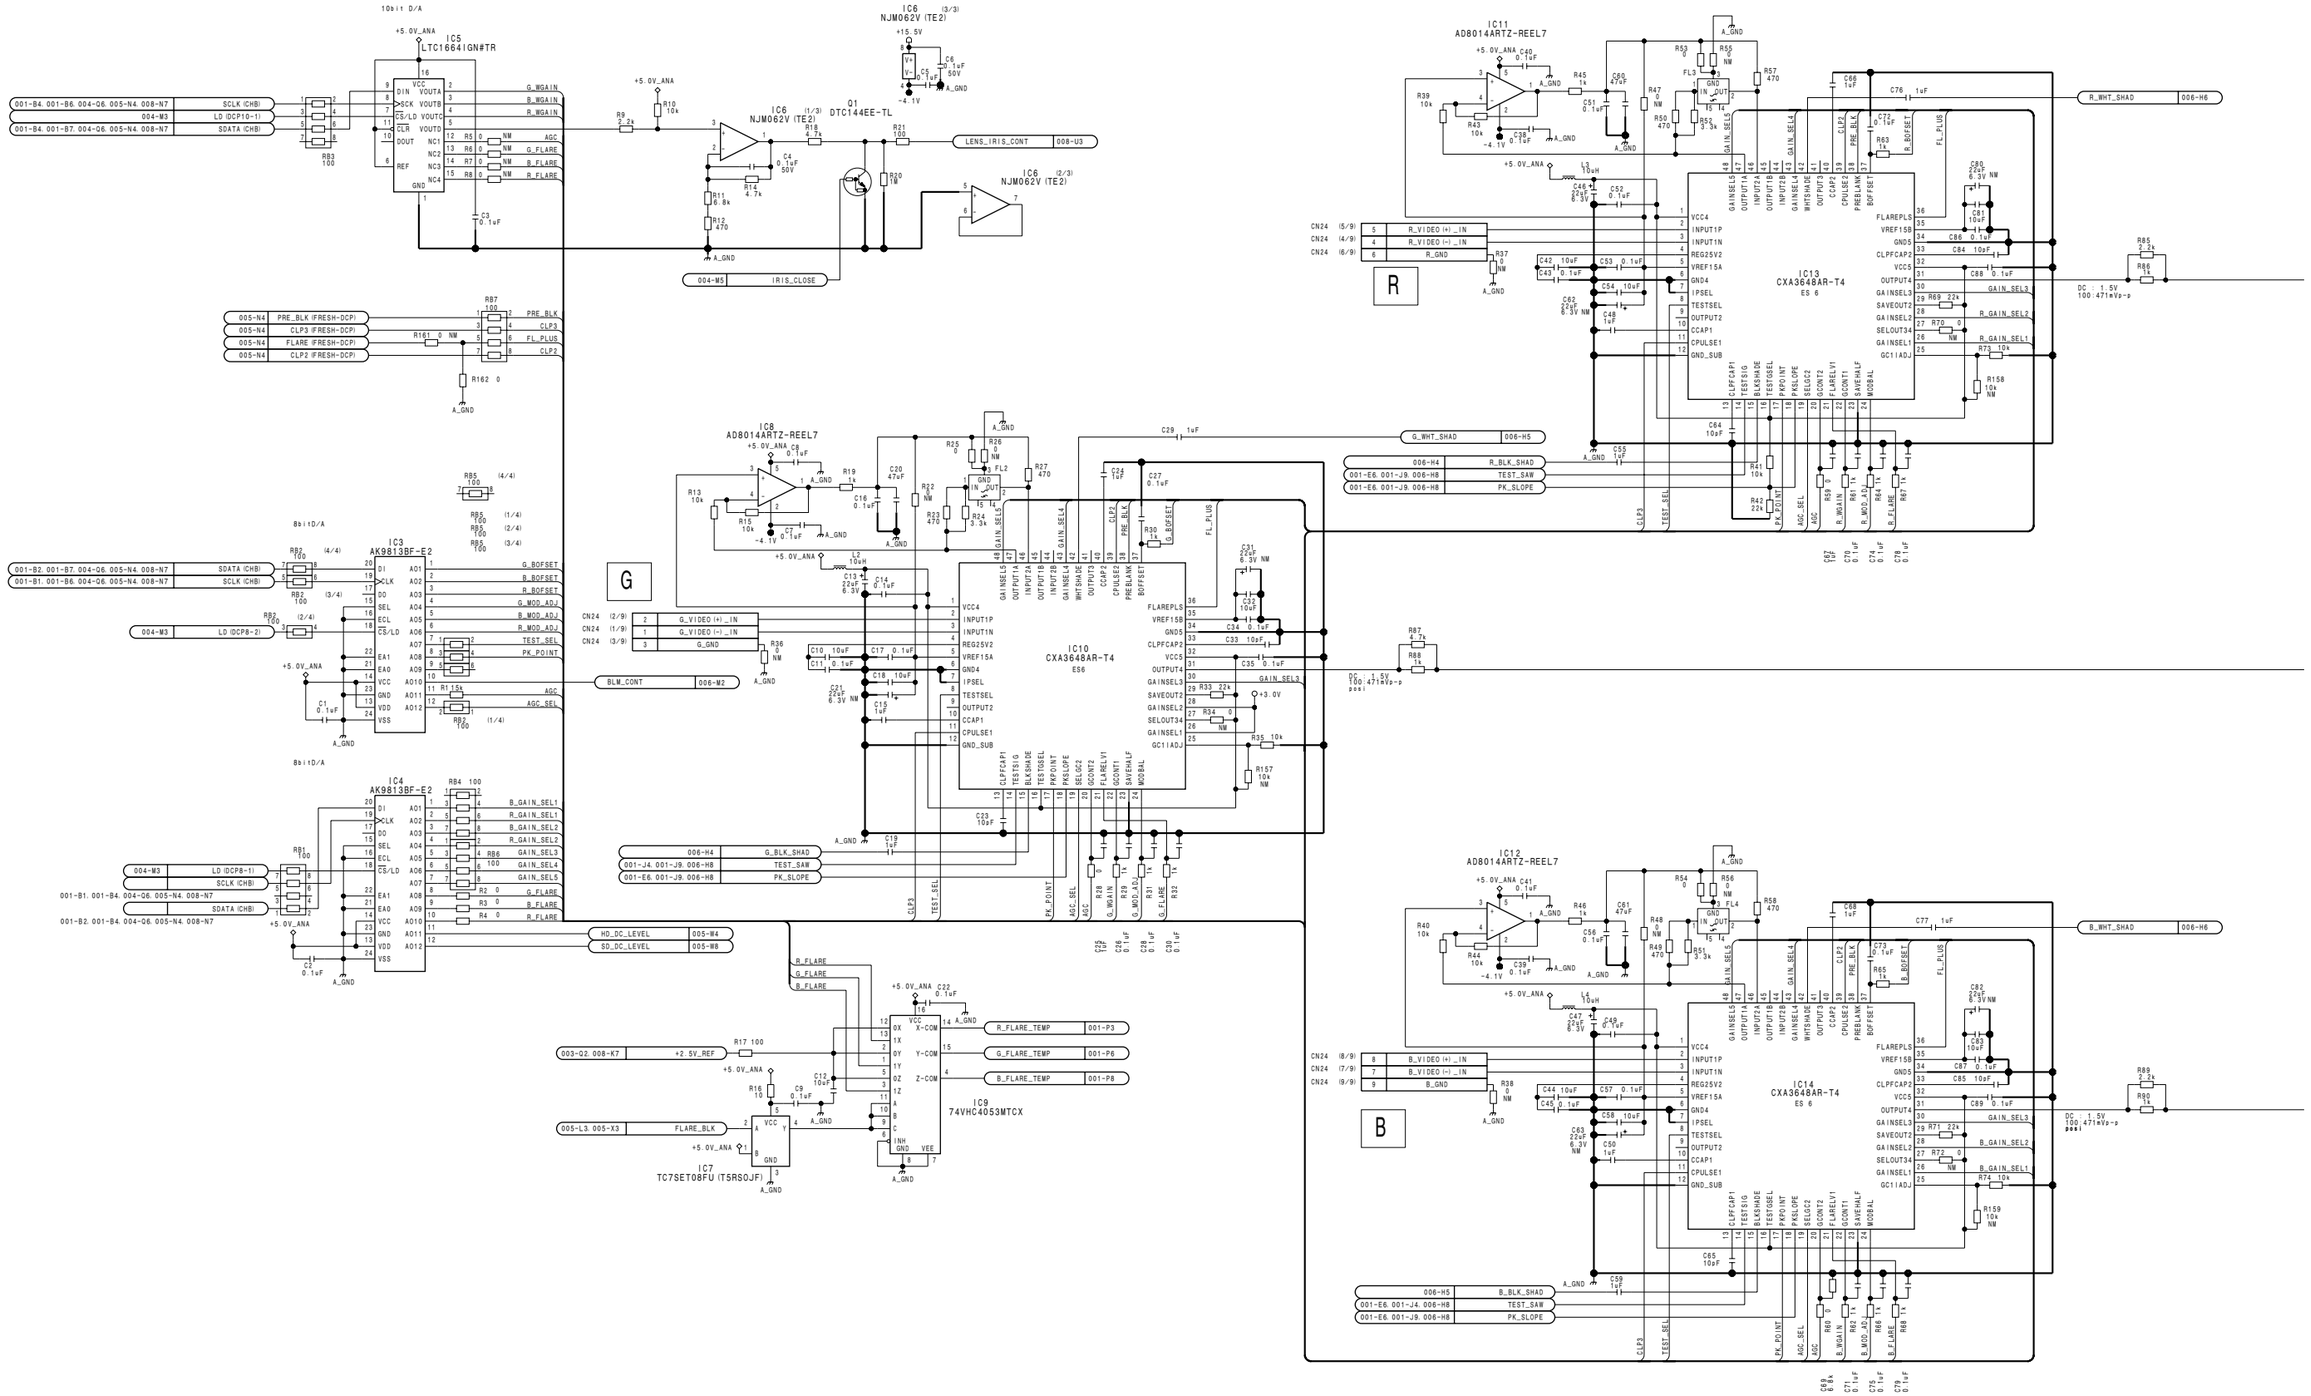
10bit D/A
IC5 LTC1664IGN#TR
IC6 NJM062V (TE2) (1/3)
IC6 NJM062V (TE2) (2/3)
IC6 NJM062V (TE2) (3/3)
Q1 DTC144EE-TL
IC8 AD8014ARTZ-REEL7
IC11 AD8014ARTZ-REEL7
IC12 AD8014ARTZ-REEL7
IC3 AK9813BF-E2
IC4 AK9813BF-E2
IC10 CXA3648AR-T4 ES6
IC13 CXA3648AR-T4 ES 6
IC14 CXA3648AR-T4 ES 6
IC9 74VHC4053MTCX
IC7 TC7SET08FU (T5RSOJF)
LENS_IRIS_CONT
IRIS_CLOSE
BLM_CONT
R_WHT_SHAD
G_WHT_SHAD
B_WHT_SHAD
R_BLK_SHAD
G_BLK_SHAD
B_BLK_SHAD
TEST_SAW
PK_SLOPE
R_FLARE_TEMP
G_FLARE_TEMP
B_FLARE_TEMP
R_VIDEO (+) _IN
R_VIDEO (-) _IN
R_GND
G_VIDEO (+) _IN
G_VIDEO (-) _IN
G_GND
B_VIDEO (+) _IN
B_VIDEO (-) _IN
B_GND
HD_DC_LEVEL
SD_DC_LEVEL
+2.5V_REF
FLARE_BLK
SCLK (CHB)
LD (DCP10-1)
SDATA (CHB)
LD (DCP8-2)
SCLK (CHB)
SDATA (CHB)
PRE_BLK
CLP3
FLARE (FRESH-DCP)
CLP2 (FRESH-DCP)
R
G
B

DCP-37A (1/8)
SUFFIX: -12

DCP-37A (1/8)
SUFFIX: -12

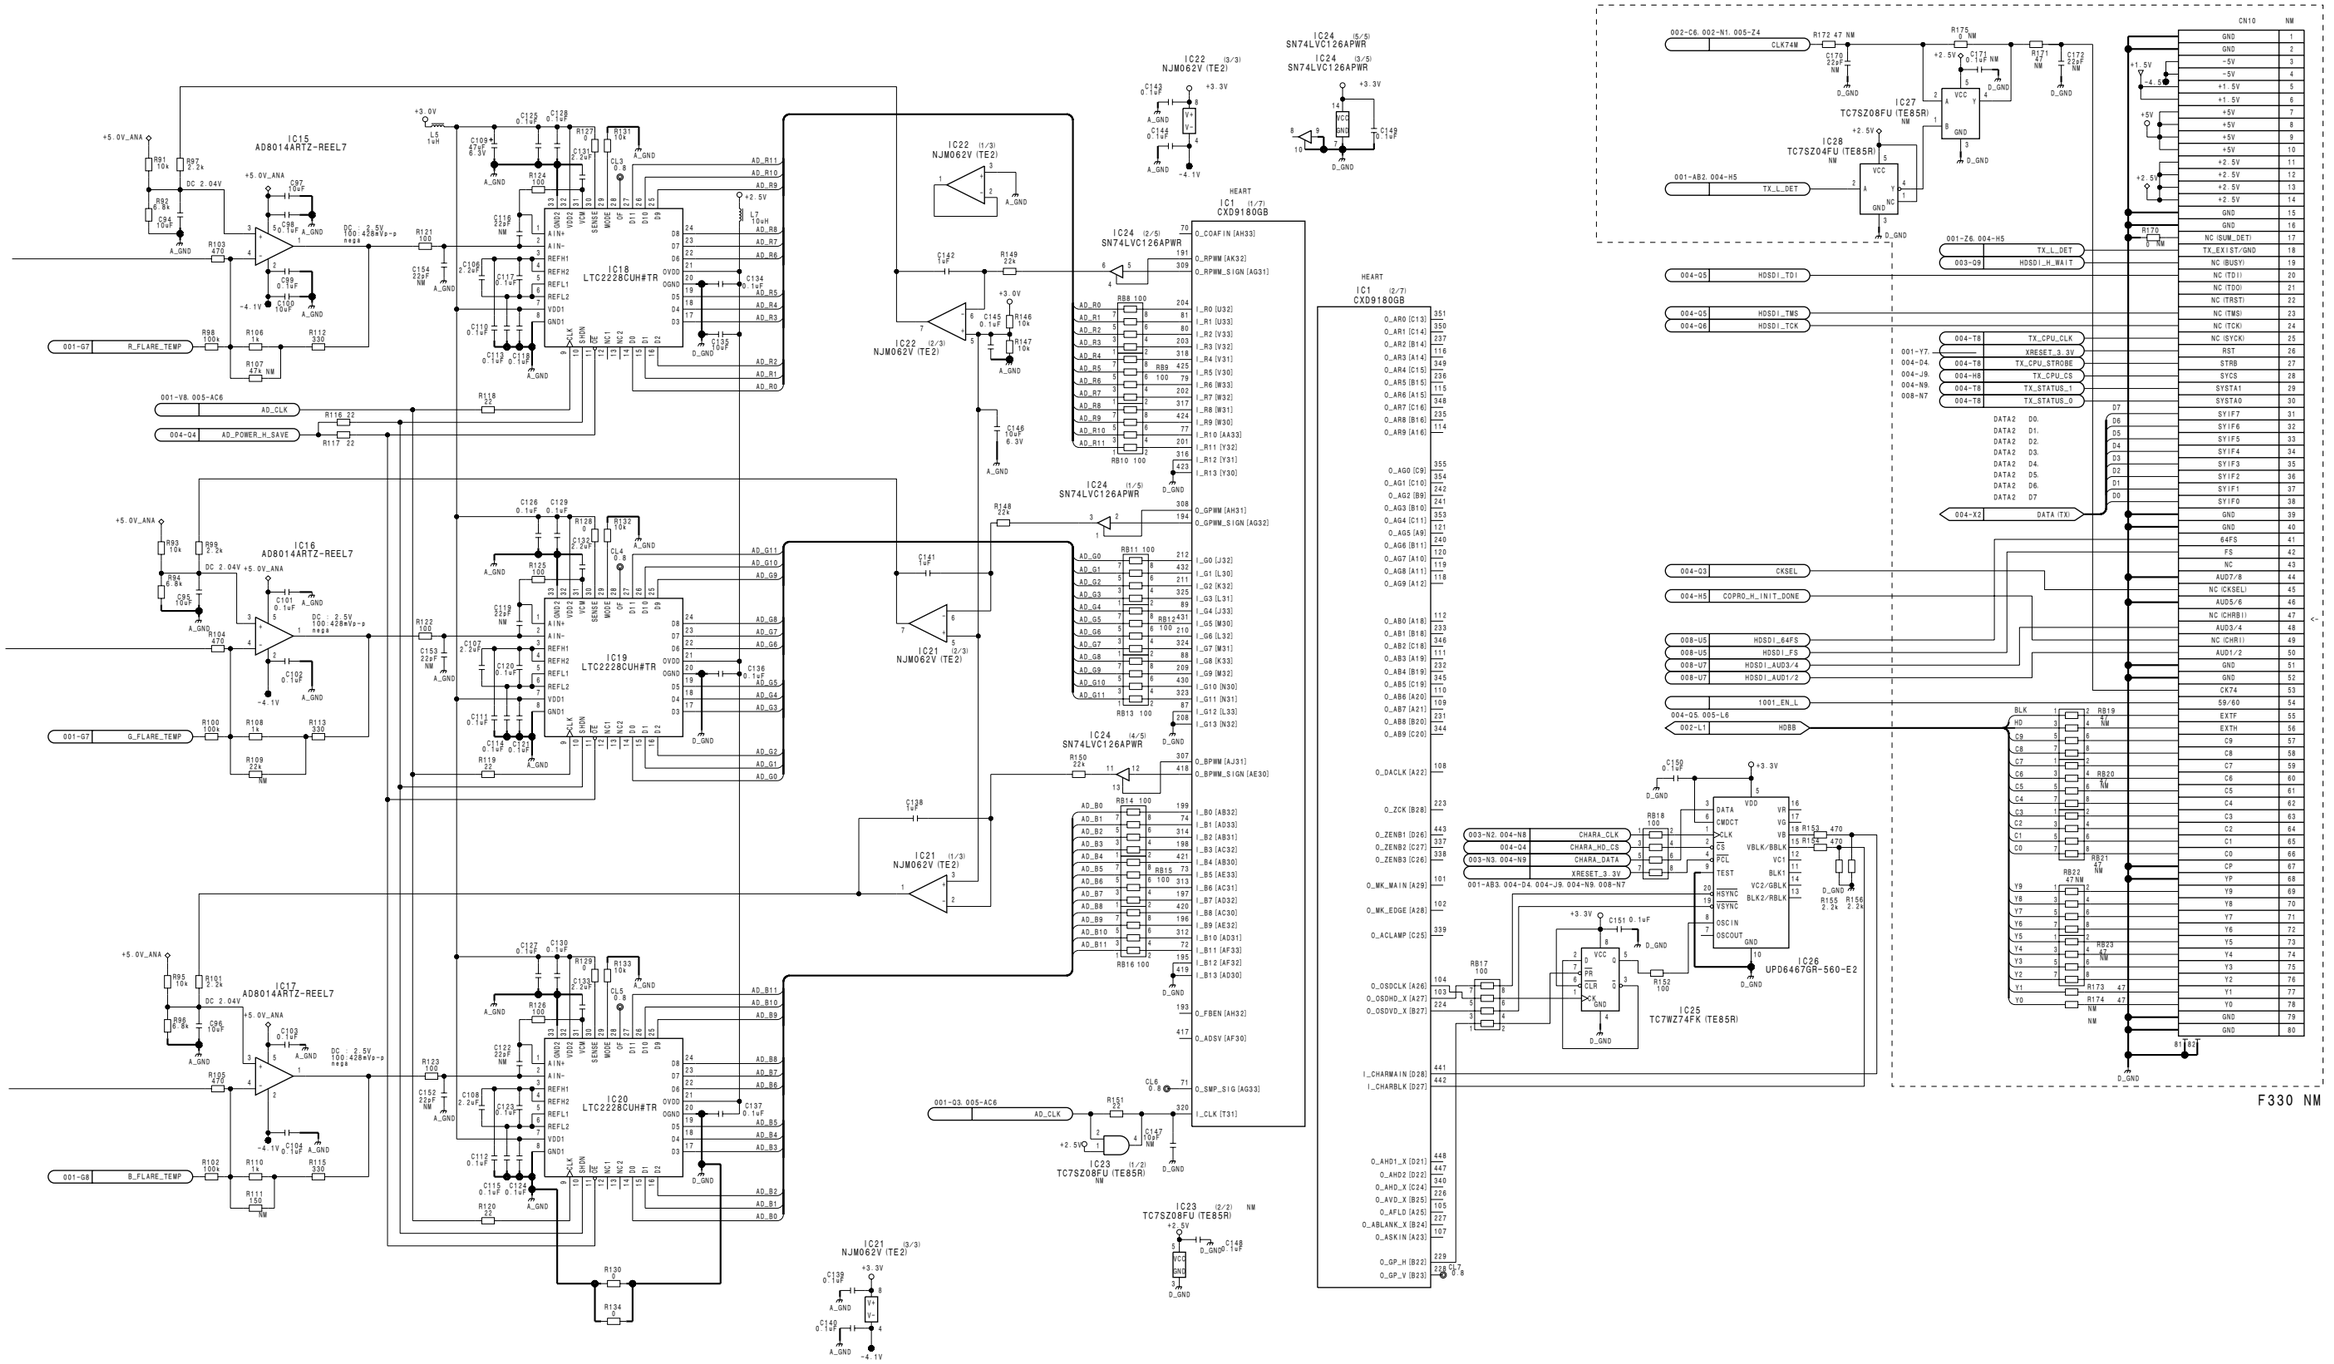

DCP-37A (1/8)
BOARD NO. 1-869-485-12
PDW-F330K_DCP-37A_122_1

DCP-37A (2/8) **SUFFIX: -12**

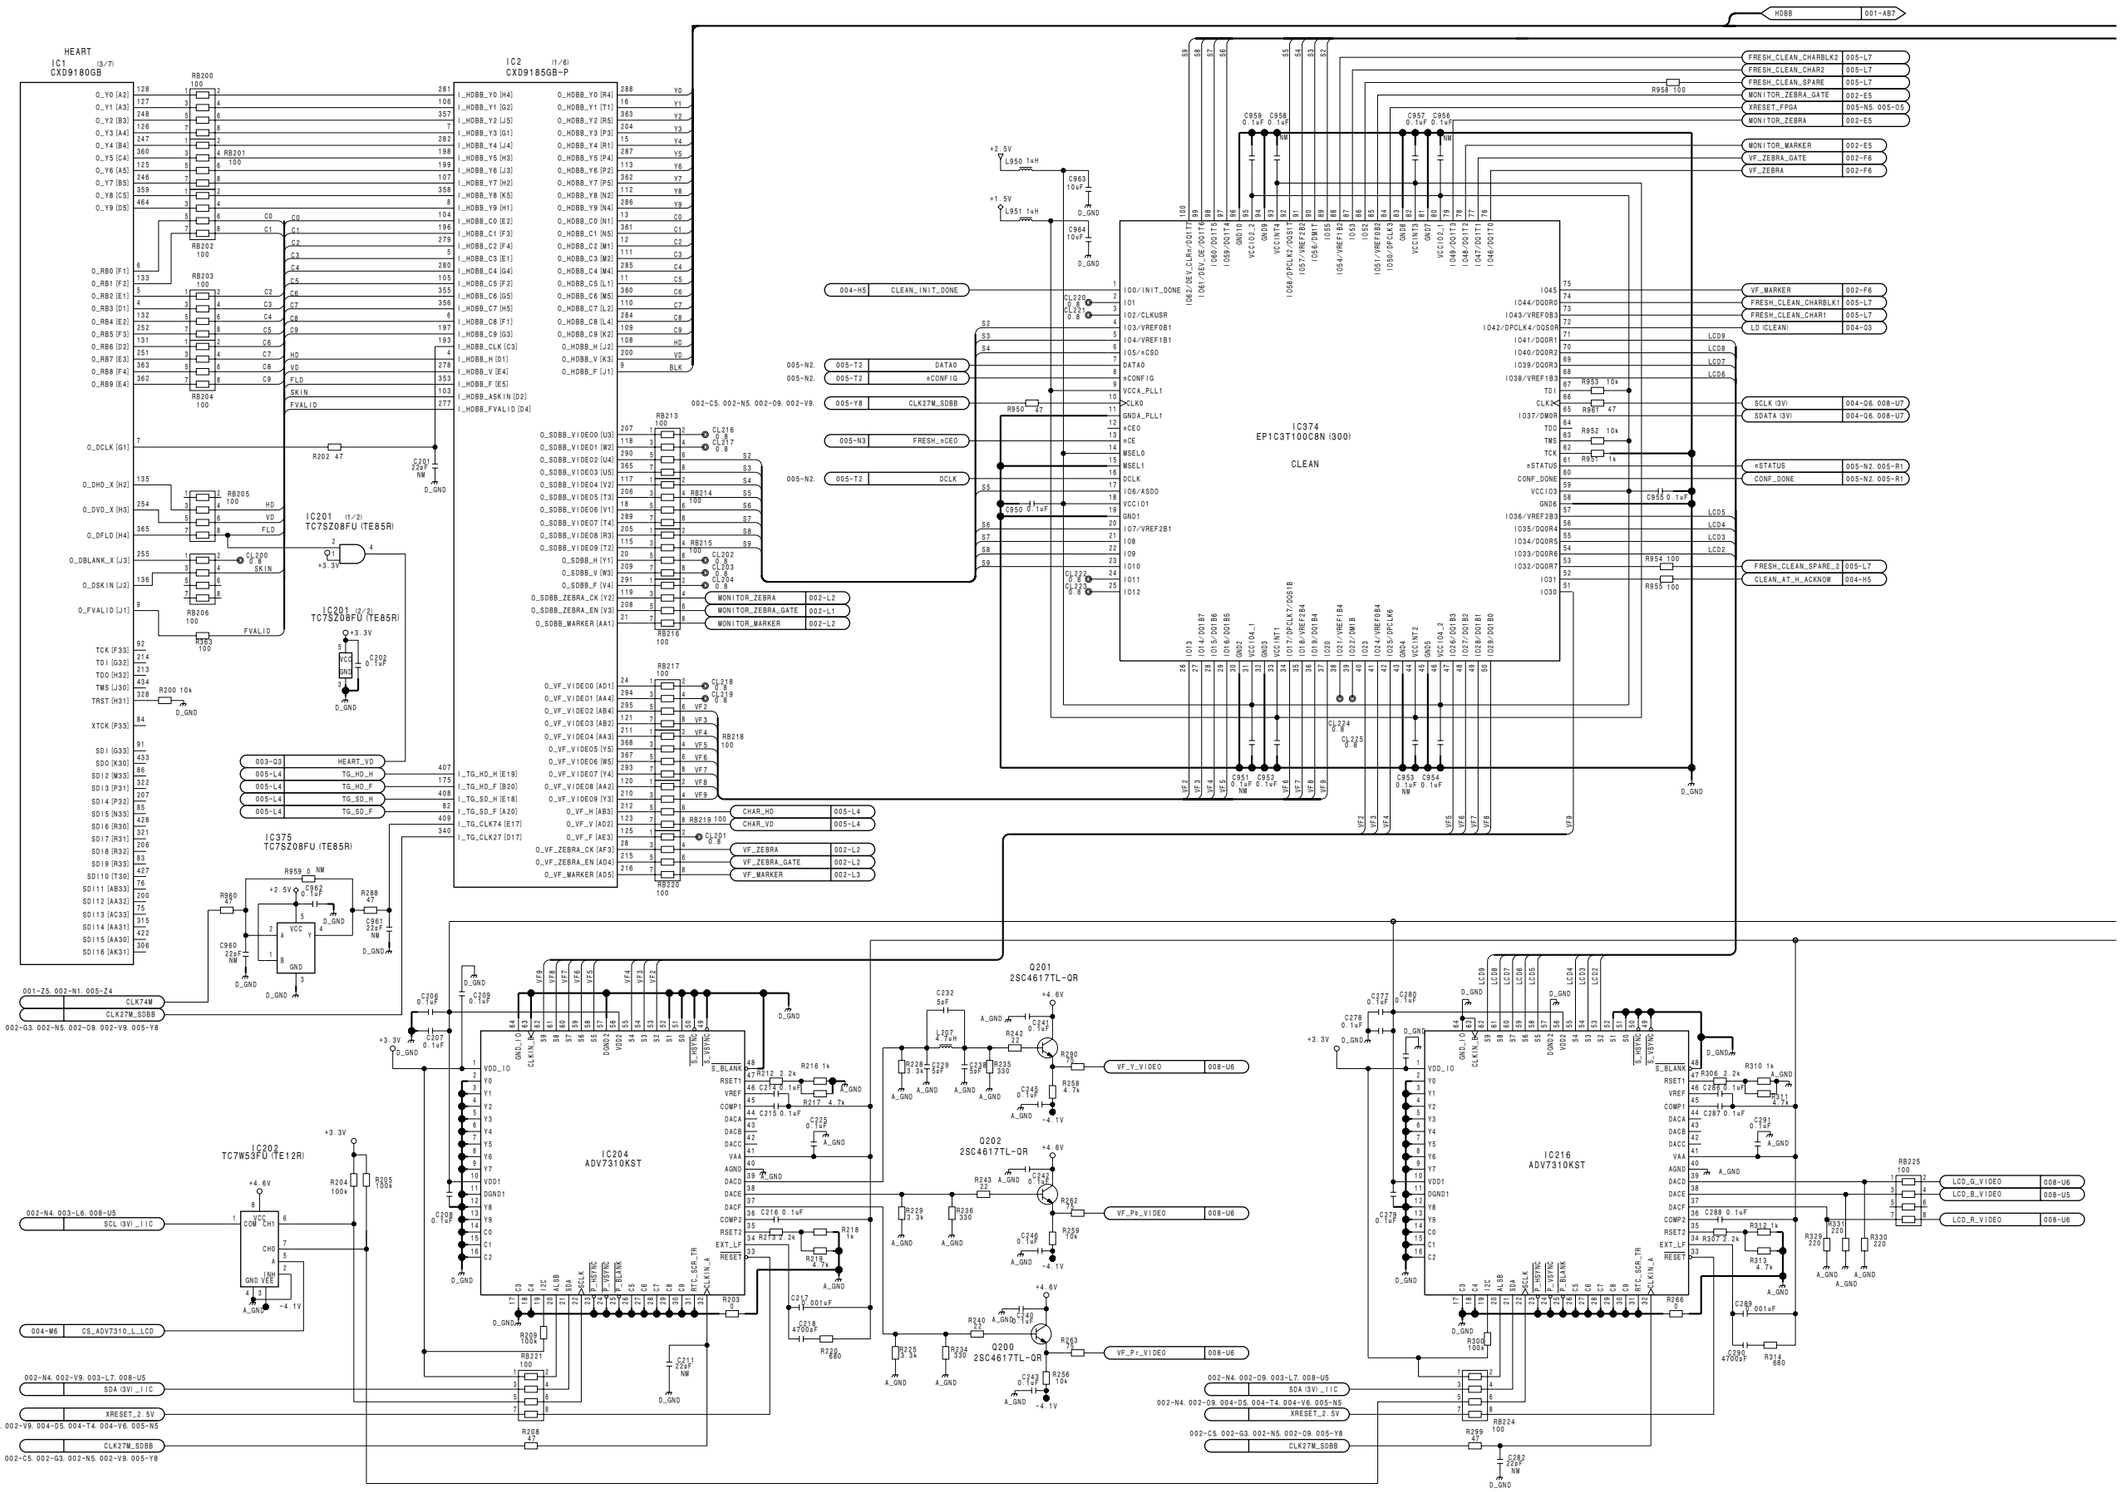

4-26

PDW-F330/V2 (J,E)

DCP-37A (2/8)
SUFFIX: -12

DCP-37A (2/8)
SUFFIX: -12

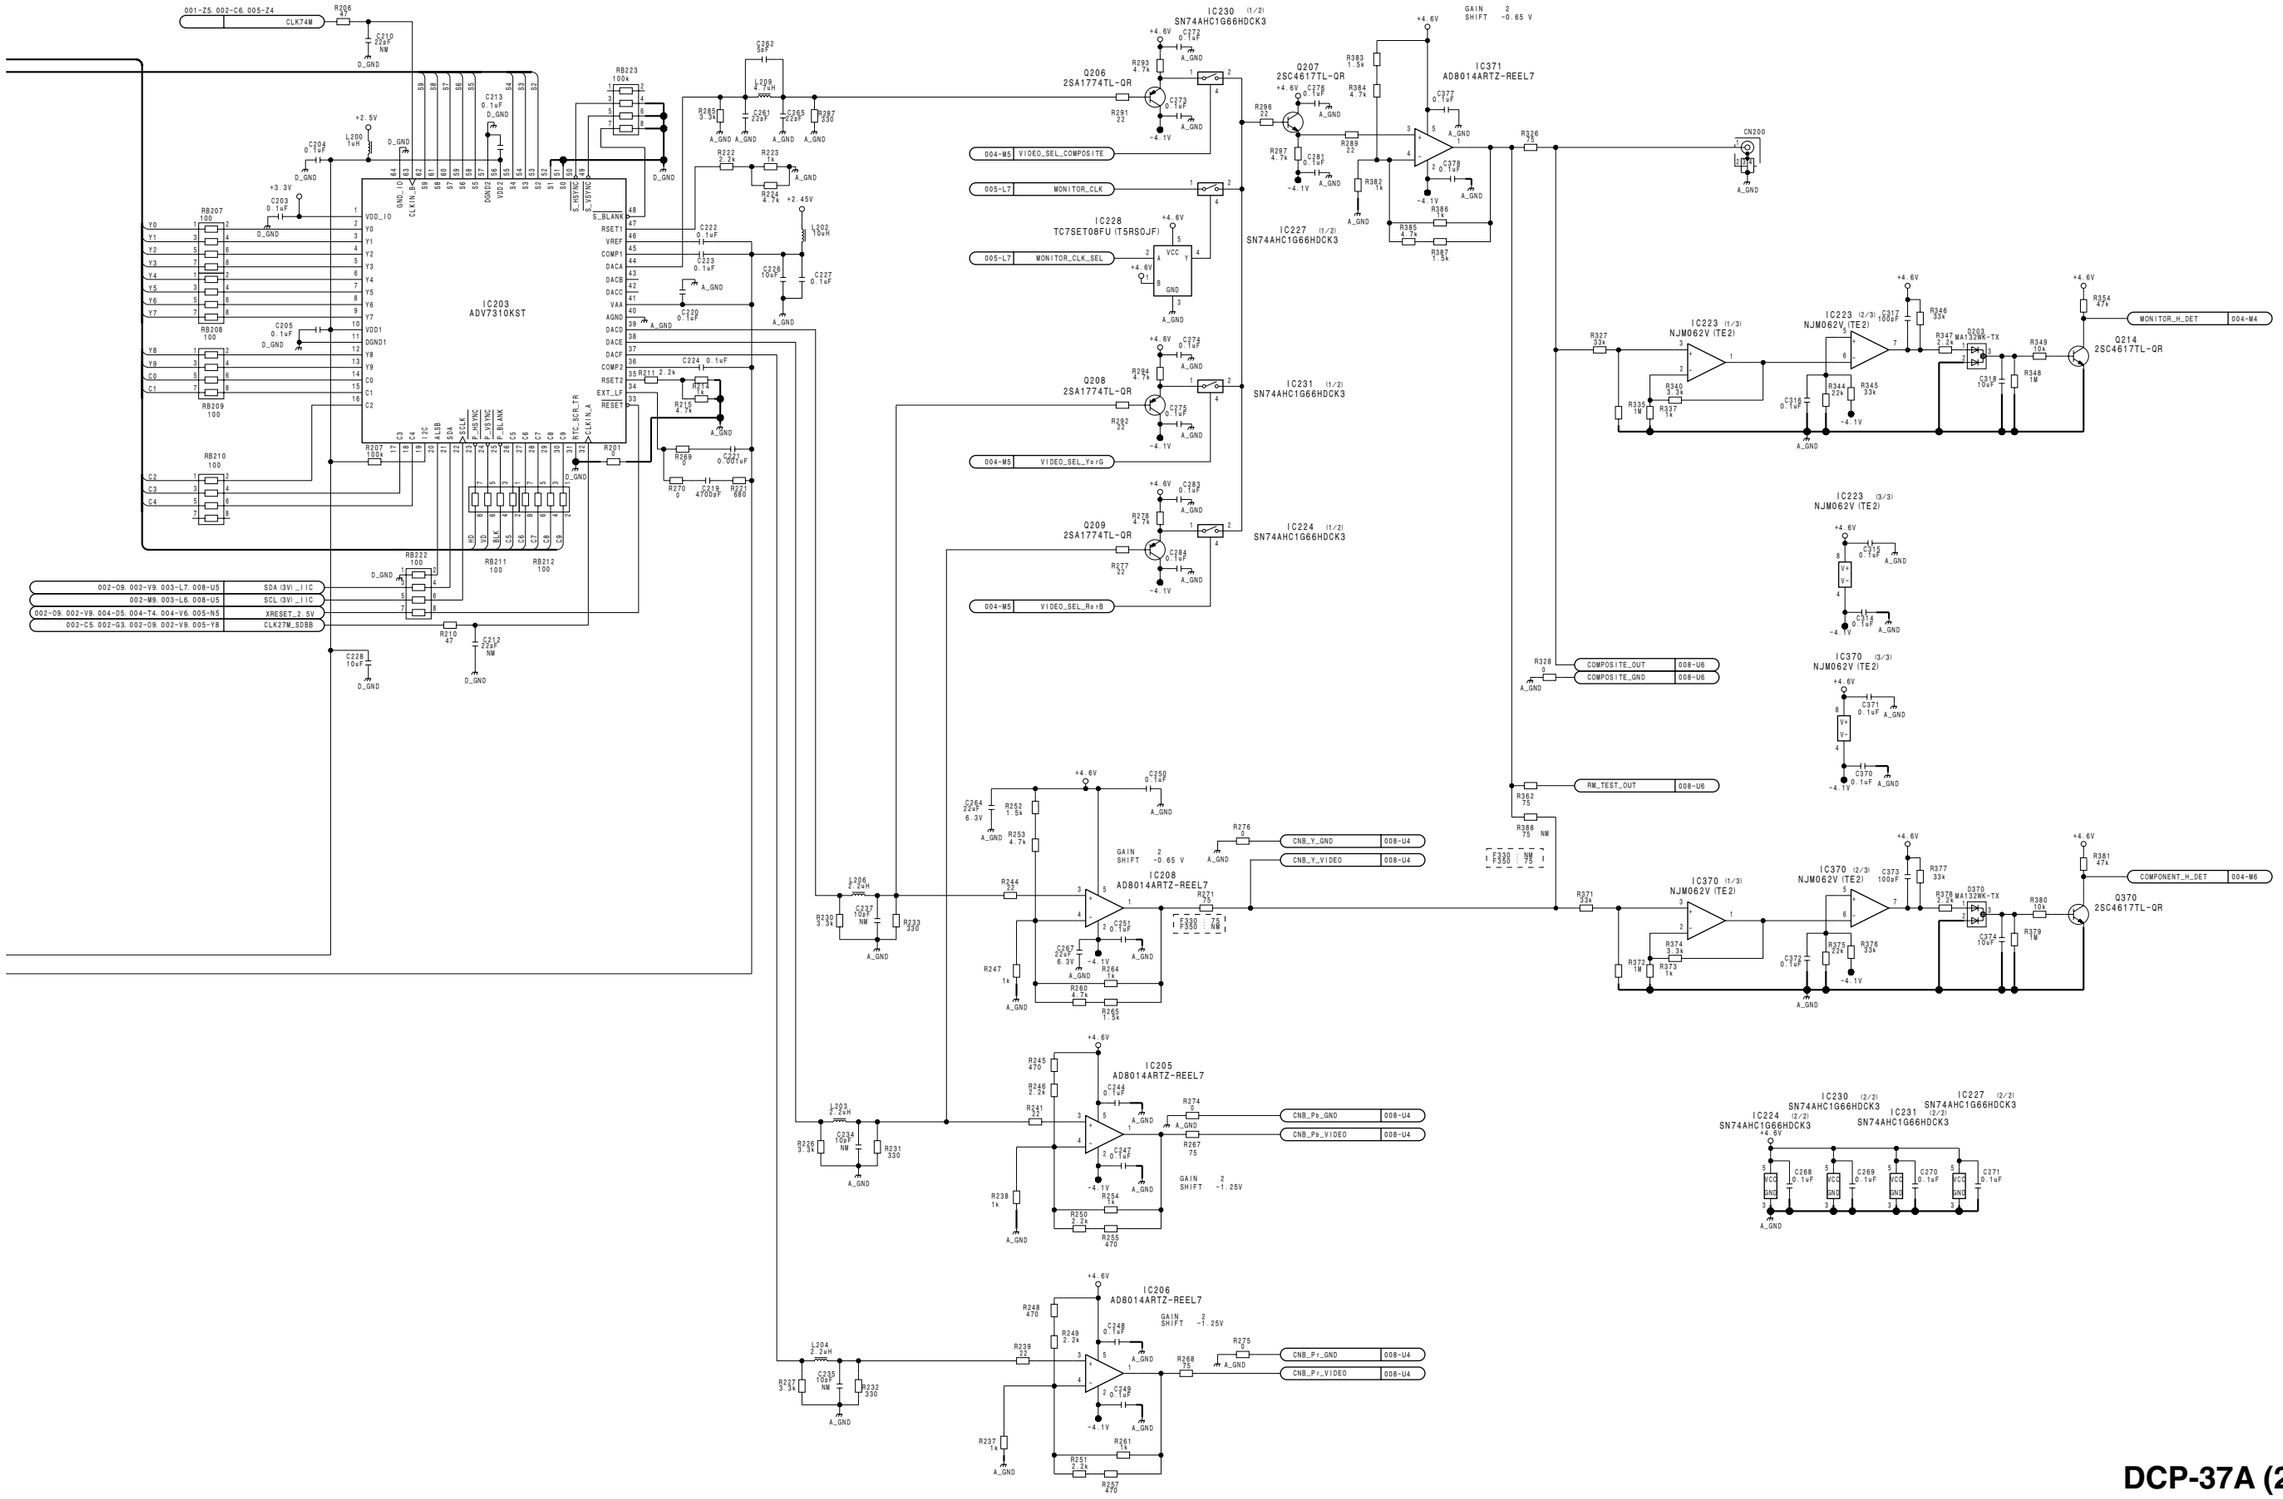

DCP-37A (2/8)
BOARD NO. 1-869-485-12
PDW-F330K_DCP-37A_122_2

DCP-37A (3/8)
SUFFIX: -12

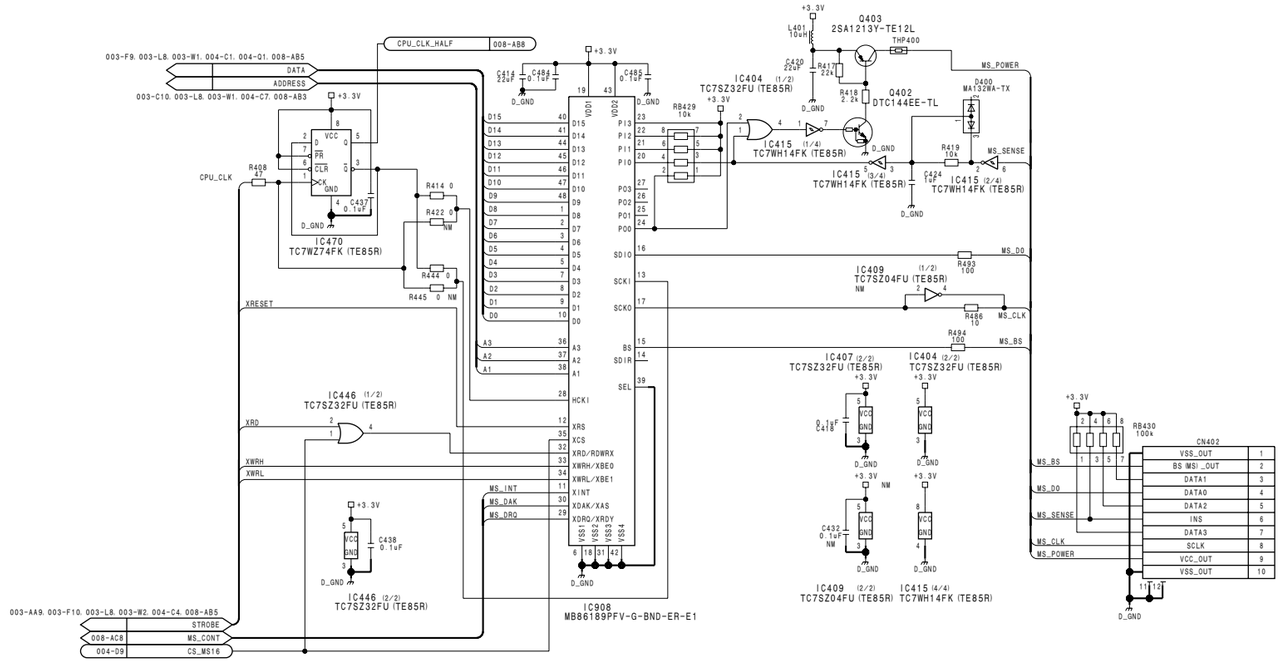

4-28

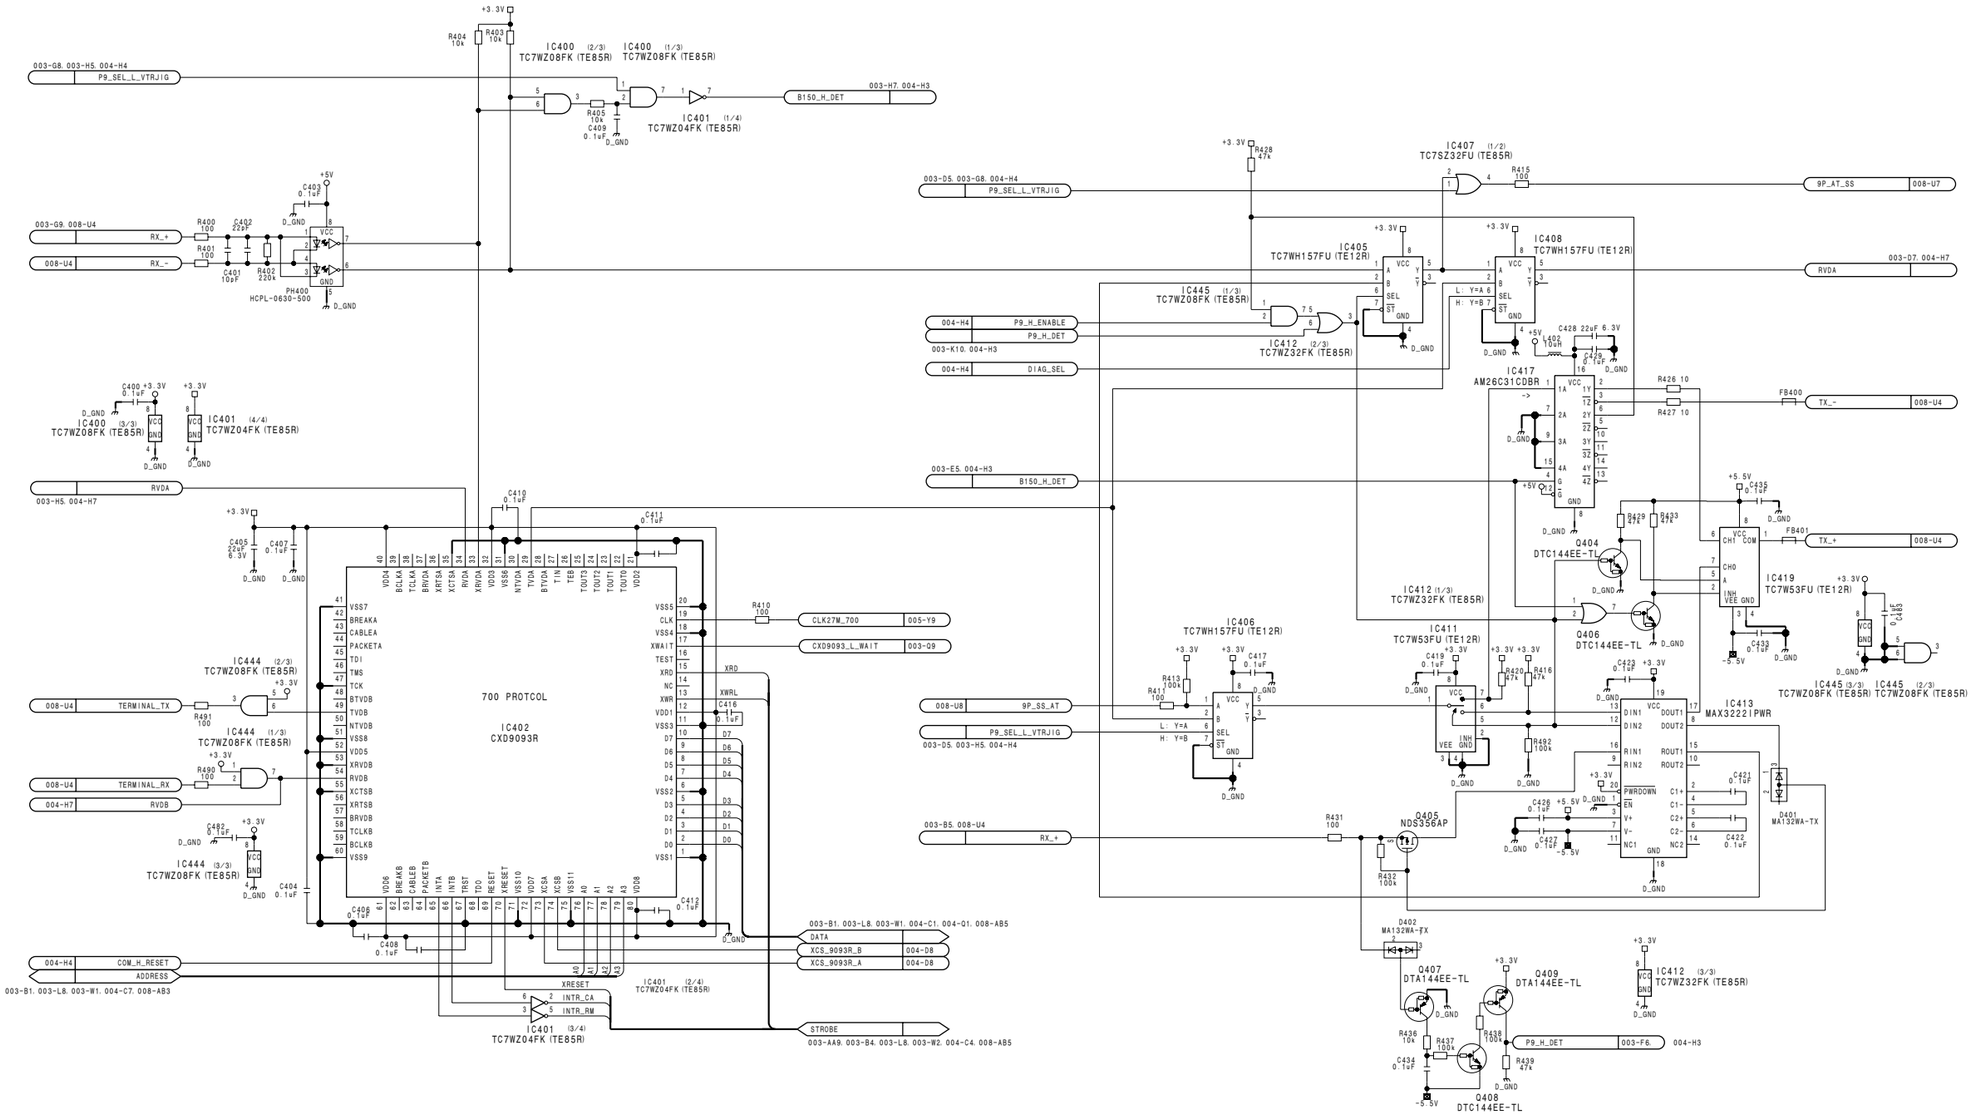
IC400 (2/3) TC7WZ08FK (TE85R)
IC400 (1/3) TC7WZ08FK (TE85R)
IC401 (1/4) TC7WZ04FK (TE85R)
IC400 (3/3) TC7WZ08FK (TE85R)
IC401 (4/4) TC7WZ04FK (TE85R)
IC444 (2/3) TC7WZ08FK (TE85R)
IC444 (1/3) TC7WZ08FK (TE85R)
IC444 (3/3) TC7WZ08FK (TE85R)
IC401 (3/4) TC7WZ04FK (TE85R)
IC401 (2/4) TC7WZ04FK (TE85R)
IC402 CXD9093R
700 PROTCOL
IC405 TC7WH157FU (TE12R)
IC406 TC7WH157FU (TE12R)
IC407 (1/2) TC7SZ32FU (TE85R)
IC408 TC7WH157FU (TE12R)
IC445 (1/3) TC7WZ08FK (TE85R)
IC412 (2/3) TC7WZ32FK (TE85R)
IC417 AM26C31CDBR
IC412 (1/3) TC7WZ32FK (TE85R)
IC411 TC7W53FU (TE12R)
IC419 TC7W53FU (TE12R)
IC413 MAX3222IPWR
IC445 (3/3) TC7WZ08FK (TE85R)
IC445 (2/3) TC7WZ08FK (TE85R)
IC412 (3/3) TC7WZ32FK (TE85R)
Q404 DTC144EE-TL
Q406 DTC144EE-TL
Q405 NDS356AP
Q407 DTA144EE-TL
Q409 DTA144EE-TL
Q408 DTC144EE-TL
D401 MA132WA-TX
D402 MA132WA-FX
PH400 HCPL-0630-500
003-G8. 003-H5. 004-H4 P9_SEL_L_VTRJIG
003-G9. 008-U4 RX_+
008-U4 RX_-
RVDA
003-H5. 004-H7
008-U4 TERMINAL_TX
008-U4 TERMINAL_RX
004-H7 RVDB
004-H4 COM_H_RESET
ADDRESS
003-B1. 003-L8. 003-W1. 004-C7. 008-AB3
CLK27M_700
005-Y9
CXD9093_L_WAIT
003-Q9
DATA
XCS_9093R_B
XCS_9093R_A
004-D8
003-B1. 003-L8. 003-W1. 004-C1. 004-Q1. 008-AB5
STROBE
003-AA9. 003-B4. 003-L8. 003-W2. 004-C4. 008-AB5
003-D5. 003-G8. 004-H4 P9_SEL_L_VTRJIG
9P_AT_SS
008-U7
003-D7. 004-H7
004-H4 P9_H_ENABLE
P9_H_DET
003-K10. 004-H3
004-H4 DIAG_SEL
003-E5. 004-H3 B150_H_DET
003-H7. 004-H3
008-U8 9P_SS_AT
003-D5. 003-H5. 004-H4 P9_SEL_L_VTRJIG
003-B5. 008-U4 RX_+
TX_-
TX_+
008-U4
003-F6. 004-H3
+3.3V
+5V
-5.5V
D_GND

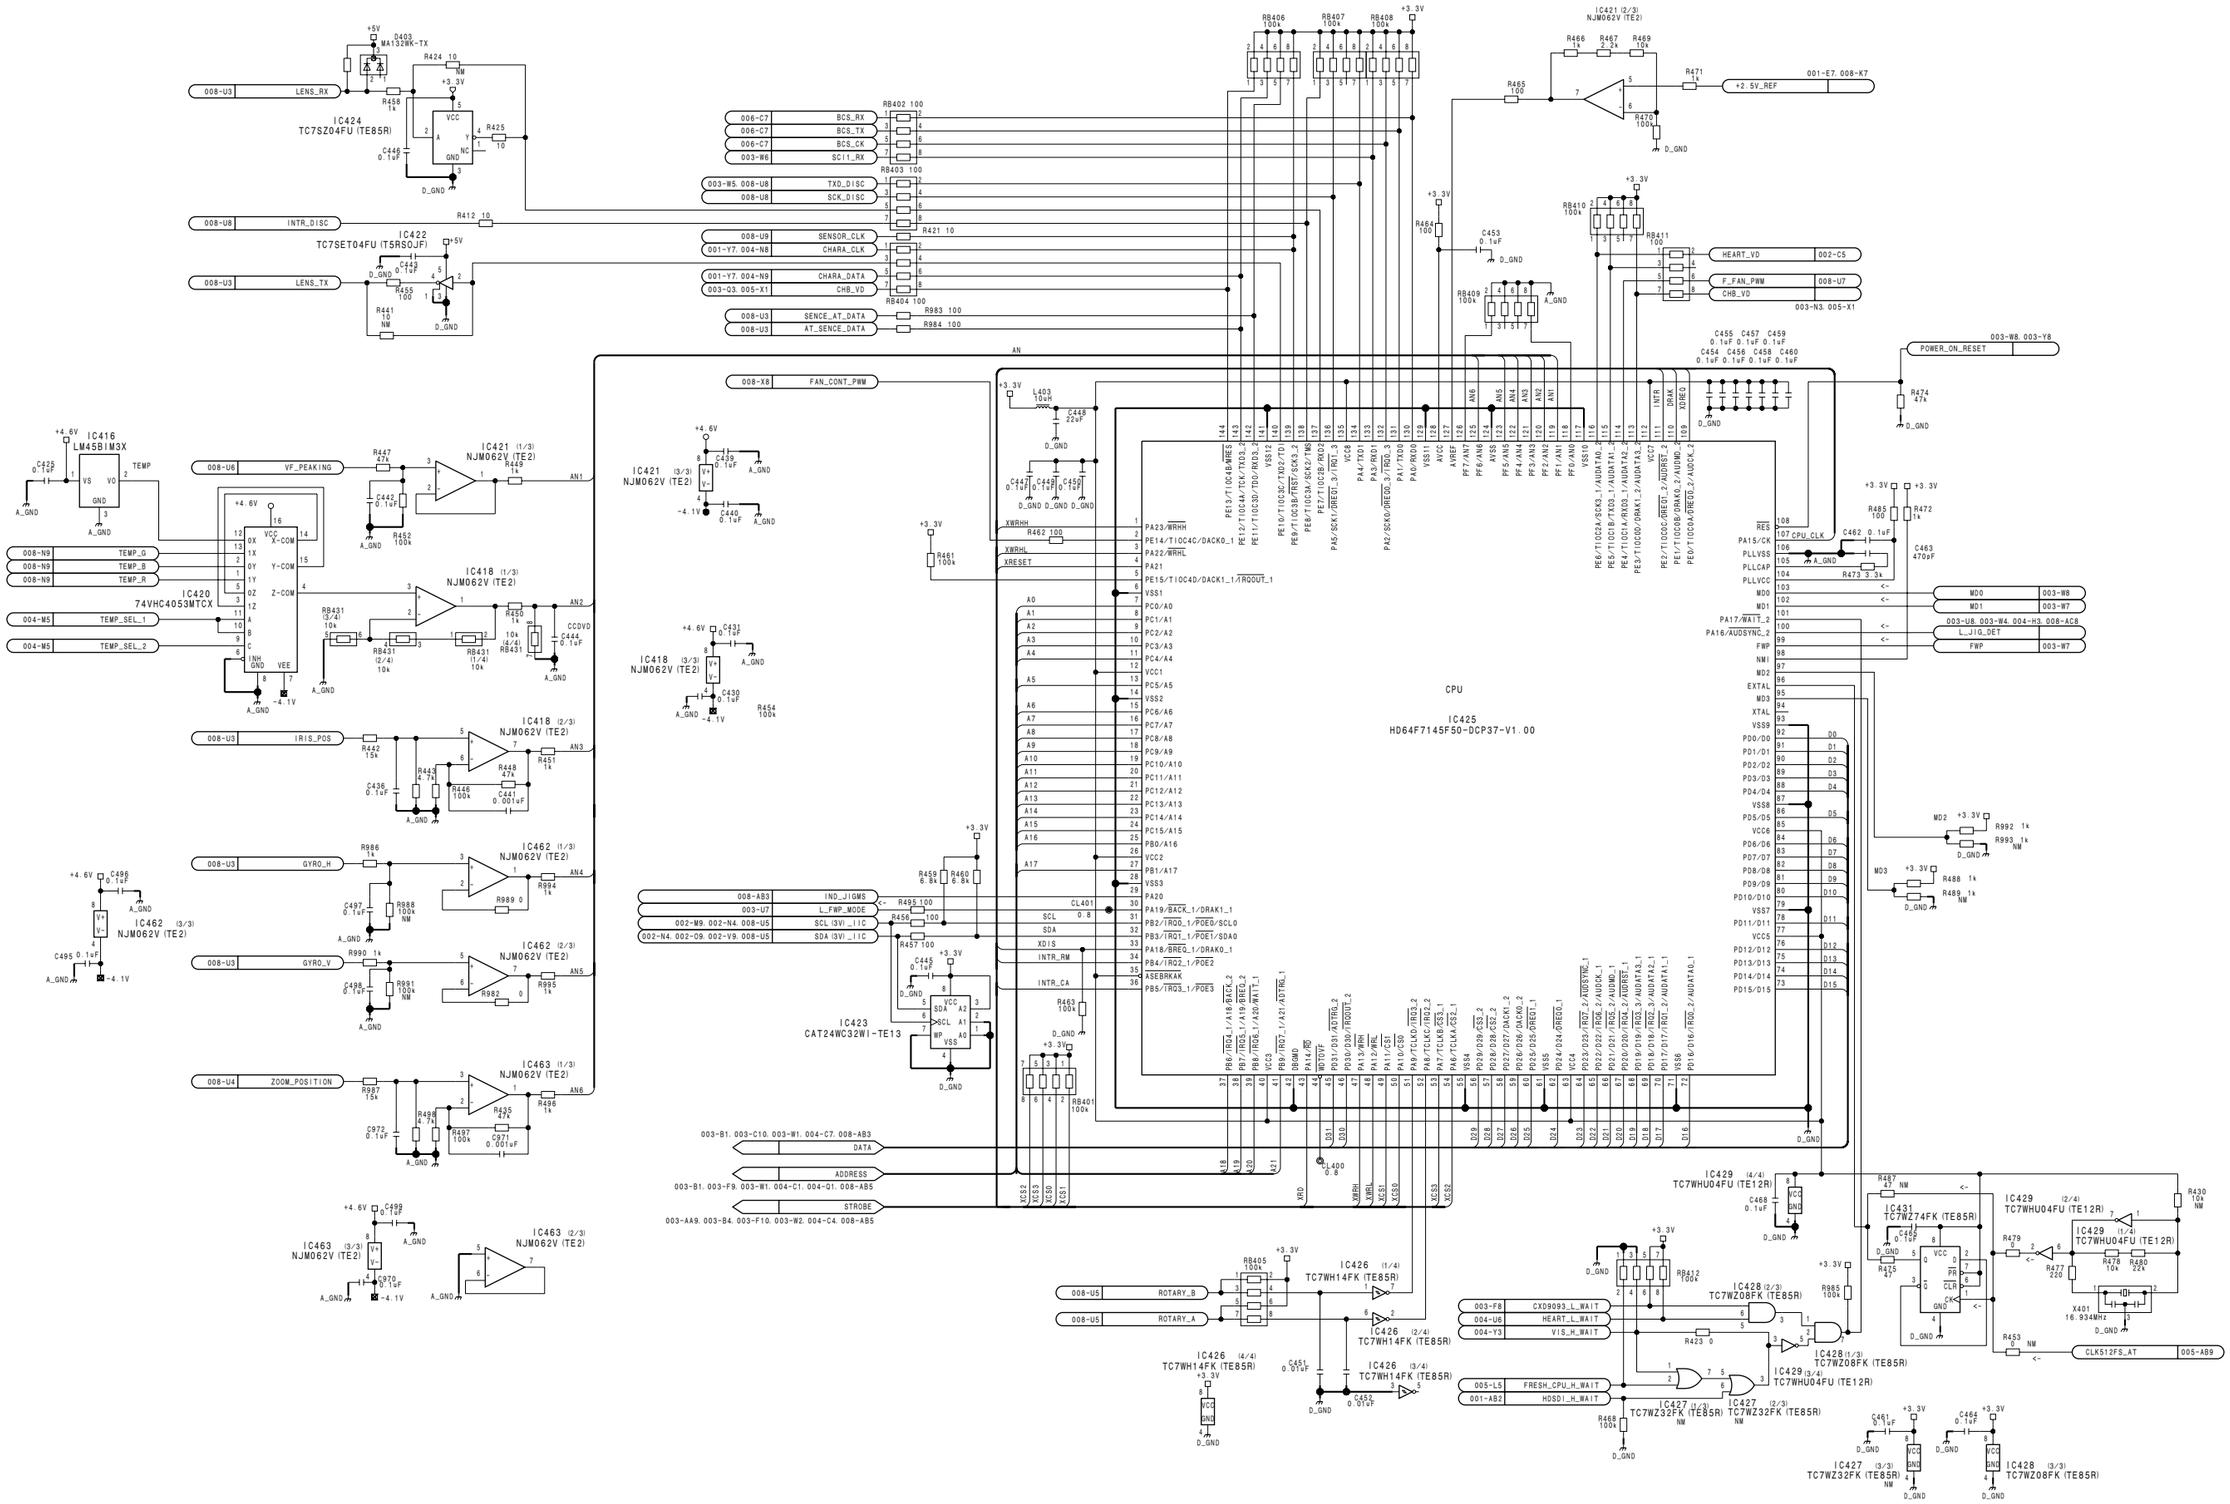
IC424 TC7SZ04FU (TE85R)
IC422 TC7SET04FU (T5RSOJF)
IC423 CAT24WC32WI-TE13
IC425 HD64F7145F50-DCP37-V1.00
CPU
IC416 LM45BIM3X
IC420 74VHC4053MTCX
IC421 (1/3) NJM062V (TE2)
IC421 (2/3) NJM062V (TE2)
IC421 (3/3) NJM062V (TE2)
IC418 (1/3) NJM062V (TE2)
IC418 (2/3) NJM062V (TE2)
IC418 (3/3) NJM062V (TE2)
IC462 (1/3) NJM062V (TE2)
IC462 (2/3) NJM062V (TE2)
IC462 (3/3) NJM062V (TE2)
IC463 (1/3) NJM062V (TE2)
IC463 (2/3) NJM062V (TE2)
IC463 (3/3) NJM062V (TE2)
IC426 (1/4) TC7WH14FK (TE85R)
IC426 (2/4) TC7WH14FK (TE85R)
IC426 (3/4) TC7WH14FK (TE85R)
IC426 (4/4) TC7WH14FK (TE85R)
IC427 (1/3) TC7WZ32FK (TE85R)
IC427 (2/3) TC7WZ32FK (TE85R)
IC427 (3/3) TC7WZ32FK (TE85R)
IC428 (1/3) TC7WZ08FK (TE85R)
IC428 (2/3) TC7WZ08FK (TE85R)
IC428 (3/3) TC7WZ08FK (TE85R)
IC429 (1/4) TC7WHU04FU (TE12R)
IC429 (2/4) TC7WHU04FU (TE12R)
IC429 (3/4) TC7WHU04FU (TE12R)
IC429 (4/4) TC7WHU04FU (TE12R)
IC431 TC7W74FK (TE85R)
008-U3 LENS_RX
008-U3 LENS_TX
008-U8 INTR_DISC
008-U6 VF_PEAKING
008-U5 IRIS_POS
008-U5 GYRO_H
008-U5 GYRO_V
008-U4 ZOOM_POSITION
004-M5 TEMP_SEL_1
004-M5 TEMP_SEL_2
008-N9 TEMP_G
008-N9 TEMP_B
008-N9 TEMP_R
006-C7 BCS_RX
006-C7 BCS_TX
006-C7 BCS_CK
003-W6 SCI1_RX
003-W5. 008-U6 TXD_DISC
008-U6 SCK_DISC
008-U9 SENSOR_CLK
001-Y7. 004-N8 CHARA_CLK
001-Y7. 004-N9 CHARA_DATA
003-Q3. 005-X1 CHB_VD
008-U3 SENCE_AT_DATA
008-U3 AT_SENCE_DATA
008-X8 FAN_CONT_PWM
008-AB3 IND_JIGMS
003-U7 L_FWP_MODE
002-M9. 002-N4. 008-U5 SCL (3V) _I1C
002-N4. 002-O9. 002-V9. 008-U5 SDA (3V) _I1C
003-B1. 003-C10. 003-W1. 004-C7. 008-AB3 DATA
003-B1. 003-F9. 003-W1. 004-C1. 004-Q1. 008-AB5 ADDRESS
003-AA9. 003-B4. 003-F10. 003-W2. 004-C4. 008-AB5 STROBE
008-U5 ROTARY_B
008-U5 ROTARY_A
003-F8 CXD9093_L_WAIT
004-U6 HEART_L_WAIT
004-Y3 VIS_H_WAIT
005-L5 FRESH_CPU_H_WAIT
001-AB2 HDSDI_H_WAIT
001-E7. 008-K7 +2.5V_REF
002-C5 HEART_VD
008-U7 F_FAN_PWM
003-N3. 005-X1 CHB_VD
003-W8. 003-Y8 POWER_ON_RESET
MD0 003-W8
MD1 003-W7
003-U8. 003-W4. 004-H3. 008-AC8 L_JIG_DET
FWP 003-W7
CLK512FS_AT 005-AB9
AN
XWRHH
XWRHL
XRESET
XRD
XCS2
XCS3
XCS0
XCS1
CL400 0.8
CL401 0.8
SCL
SDA
XDIS
INTR_RM
INTR_CA
CPU_CLK
D_GND
A_GND
+3.3V
+4.6V
-4.1V

DCP-37A (3/8)
SUFFIX: -12

DCP-37A (3/8)
SUFFIX: -12

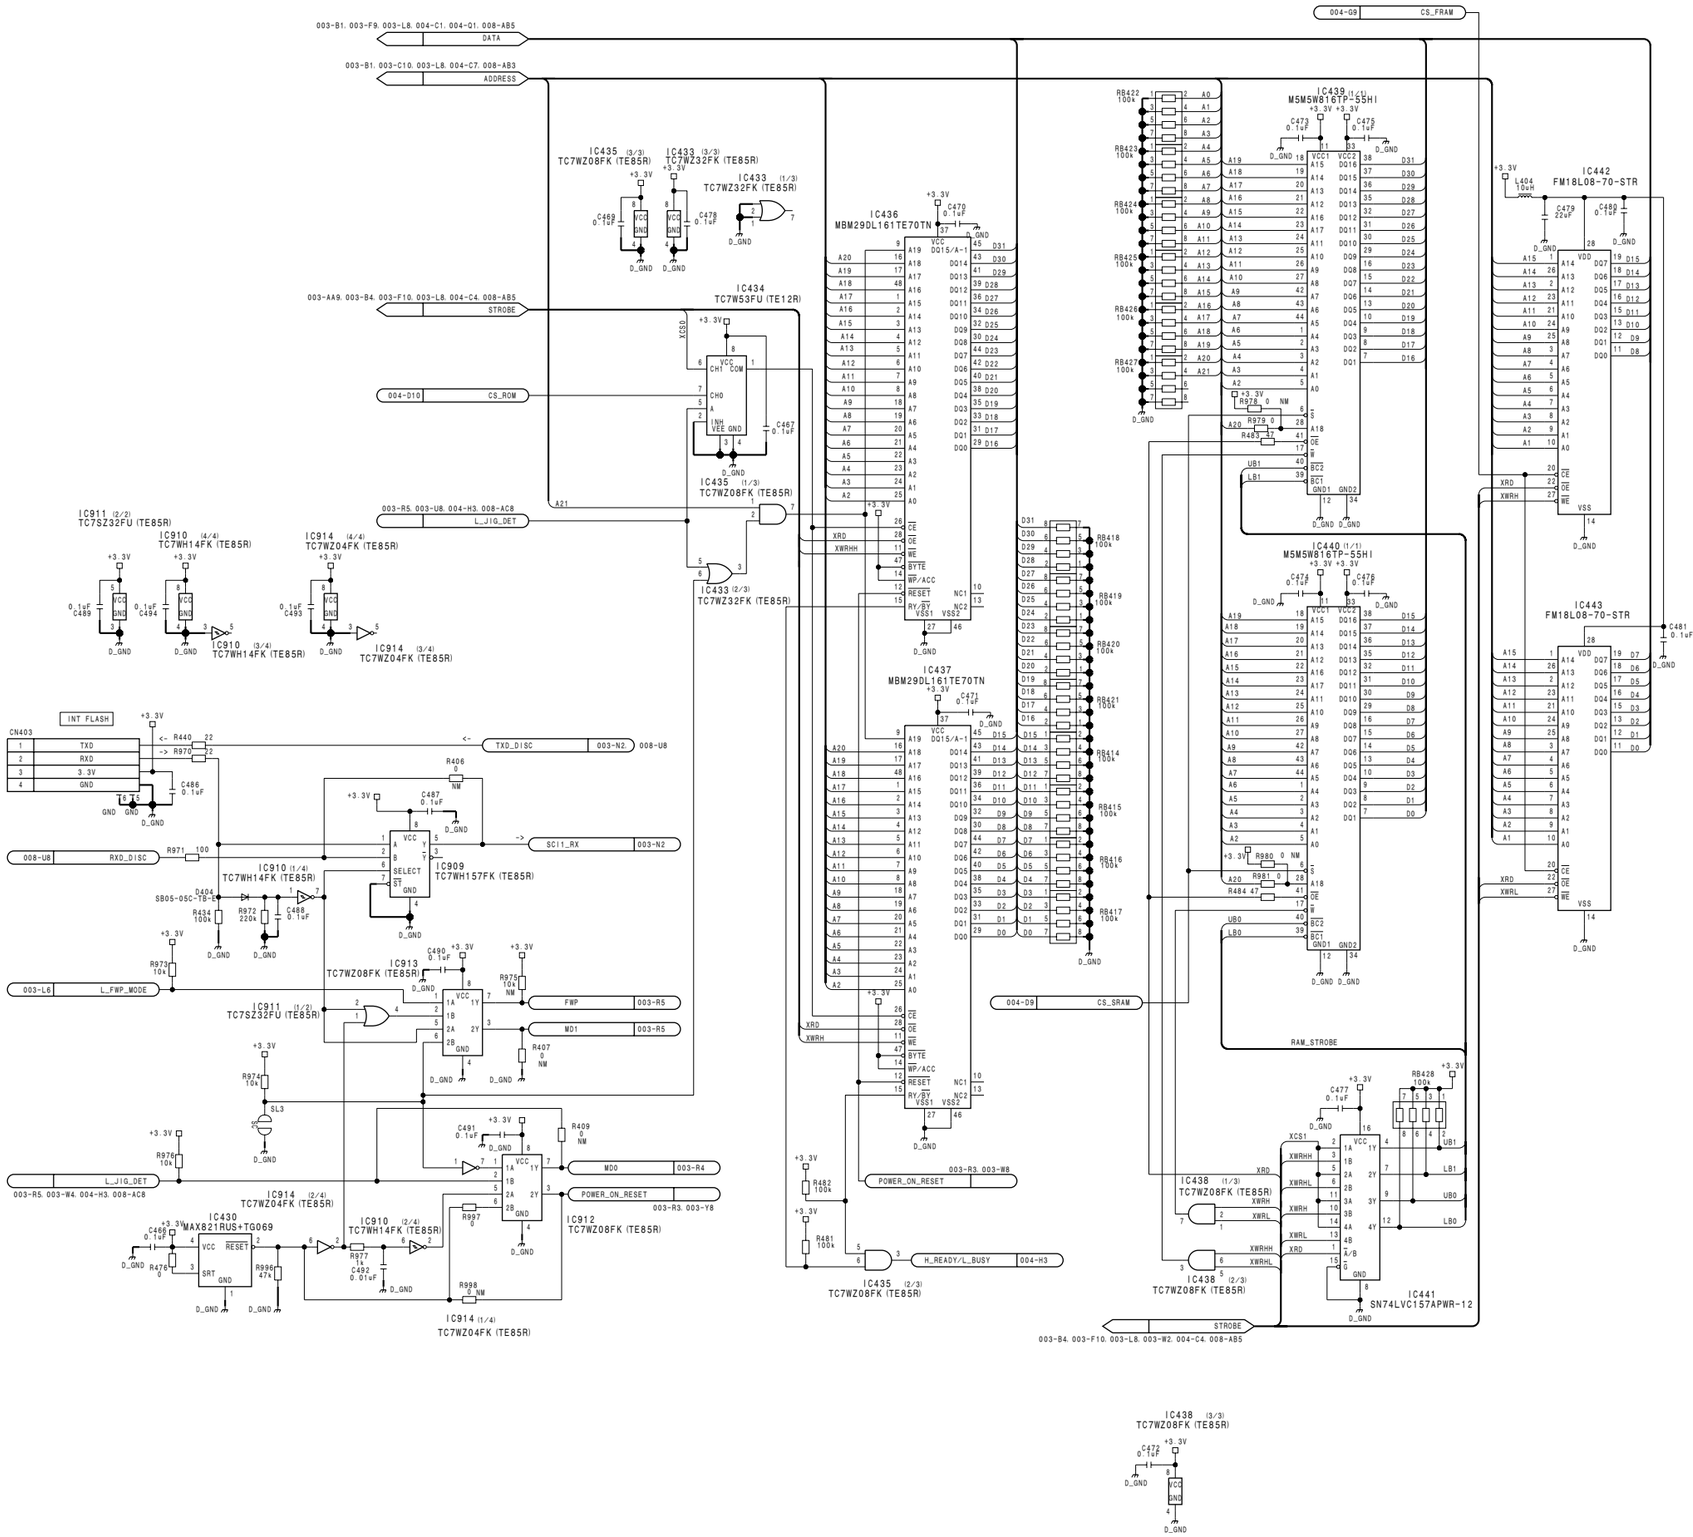

DCP-37A (3/8)
BOARD NO. 1-869-485-12
PDW-F330K_DCP-37A_122_3

DCP-37A (4/8) **SUFFIX: -12**

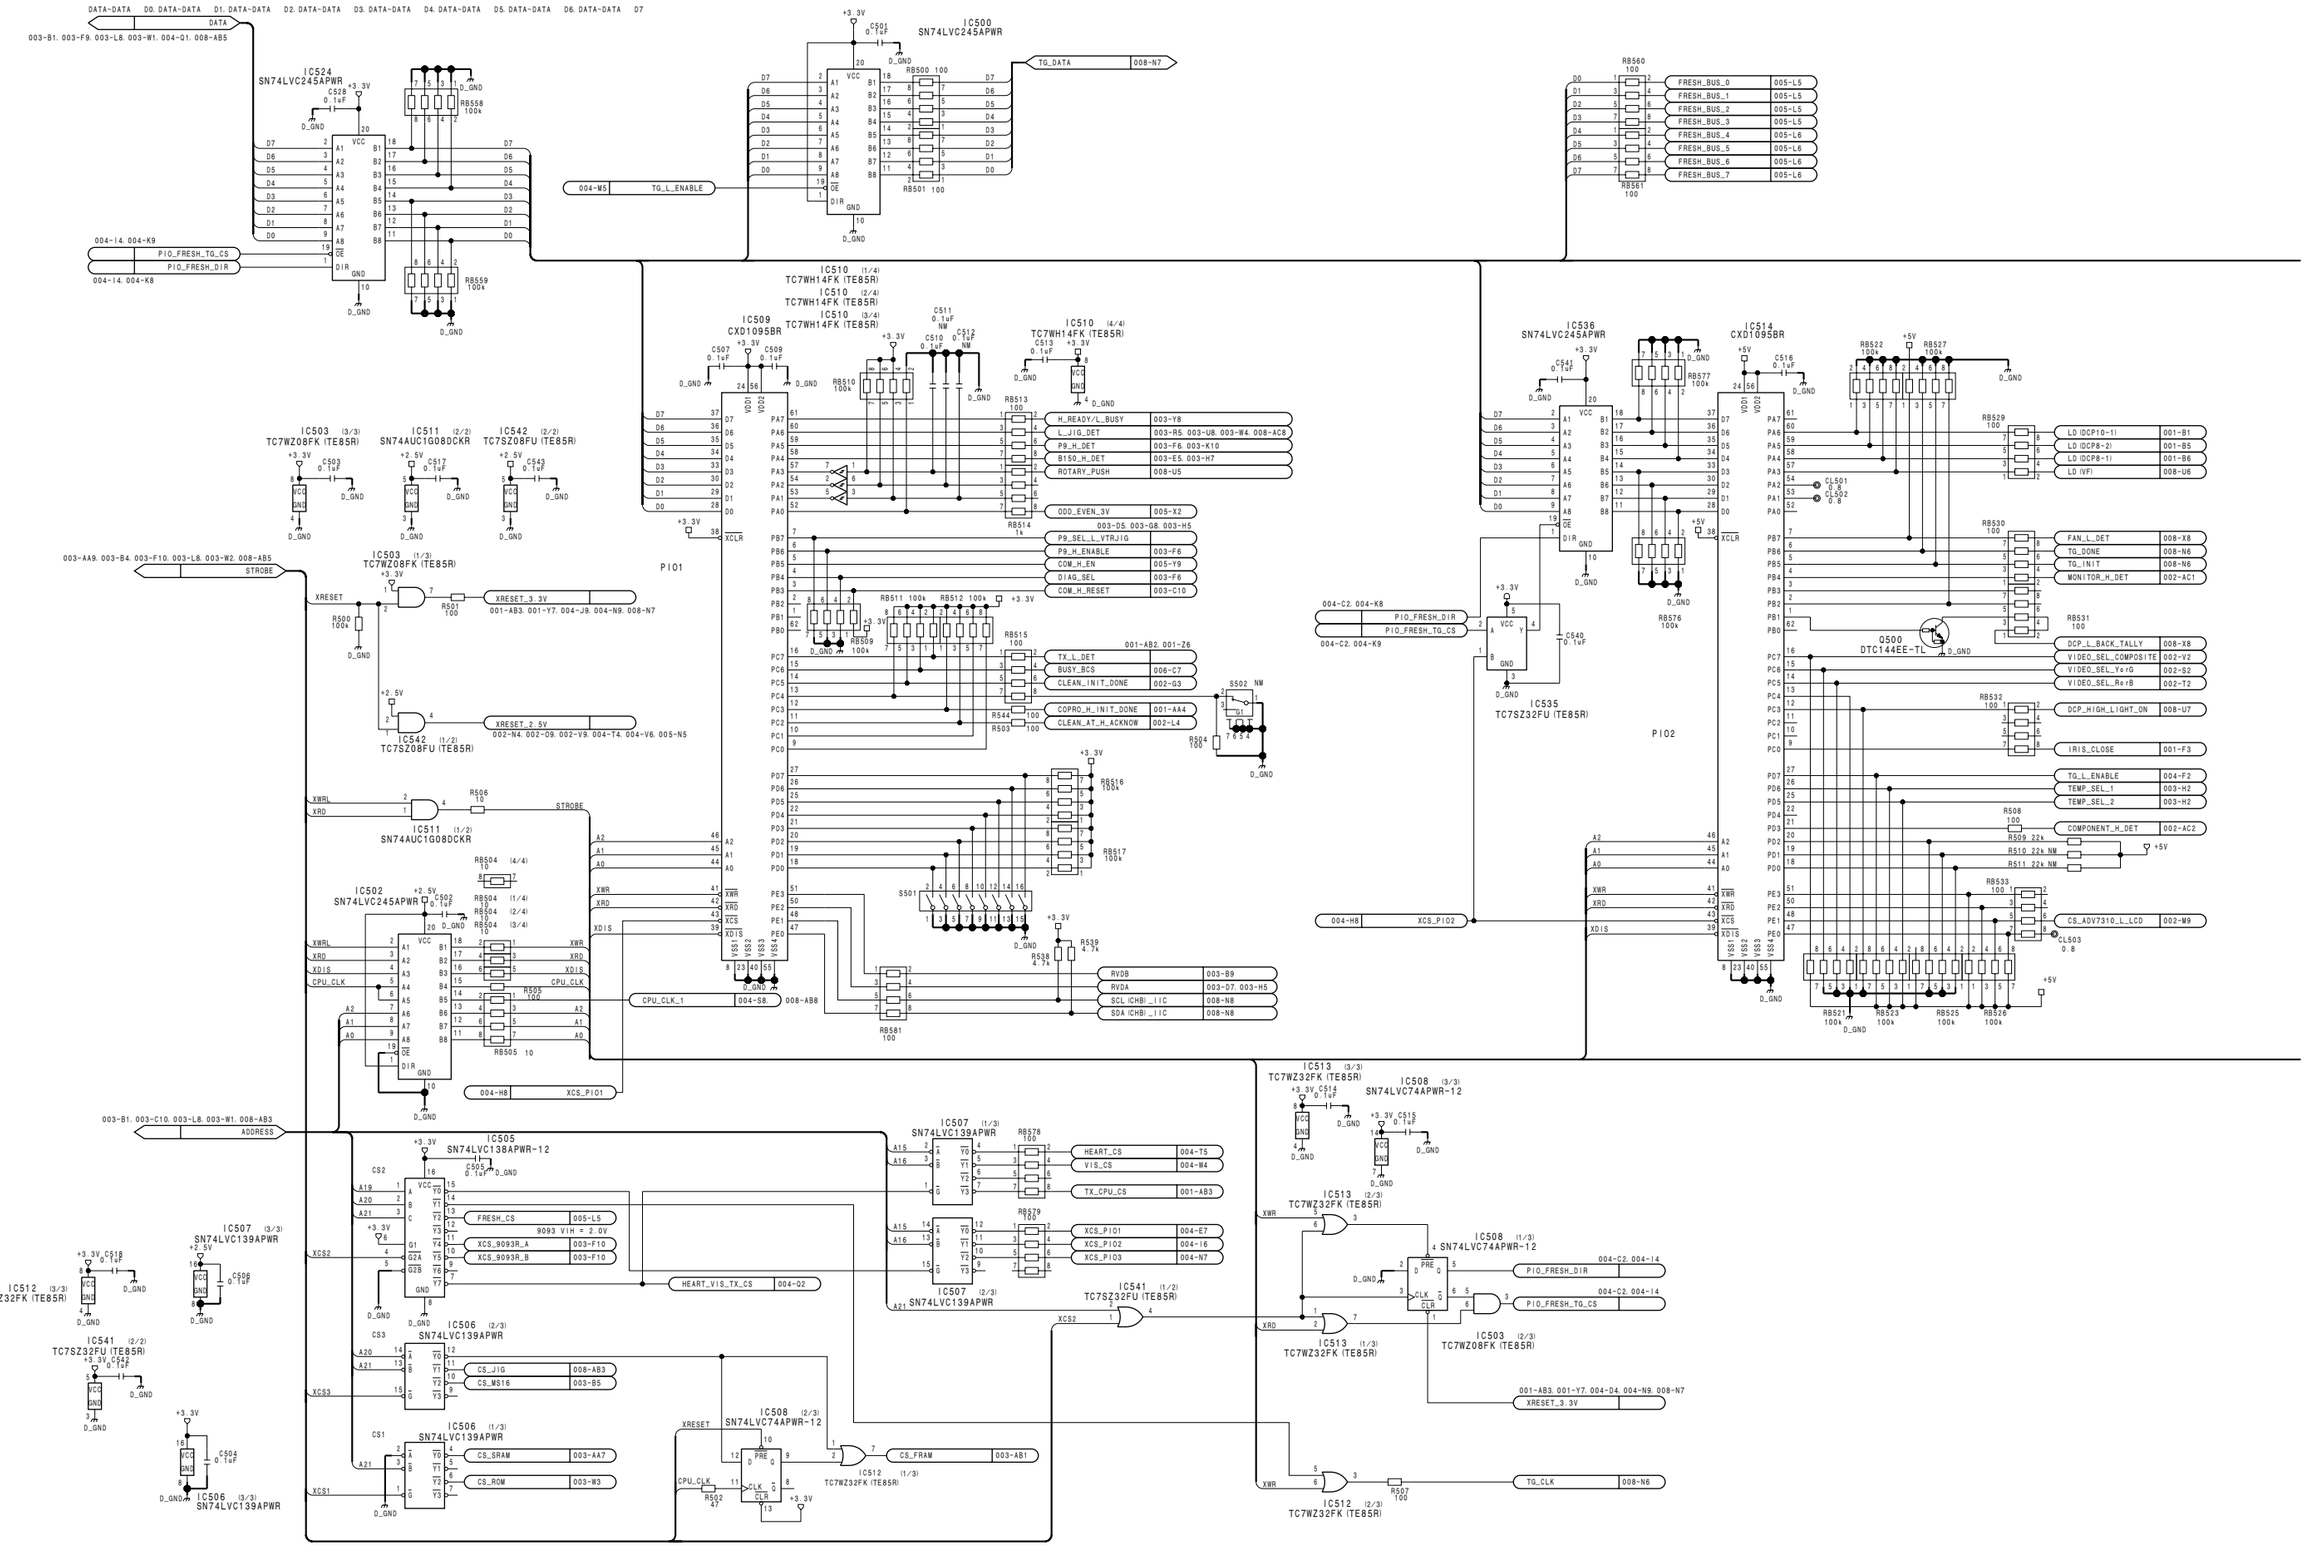

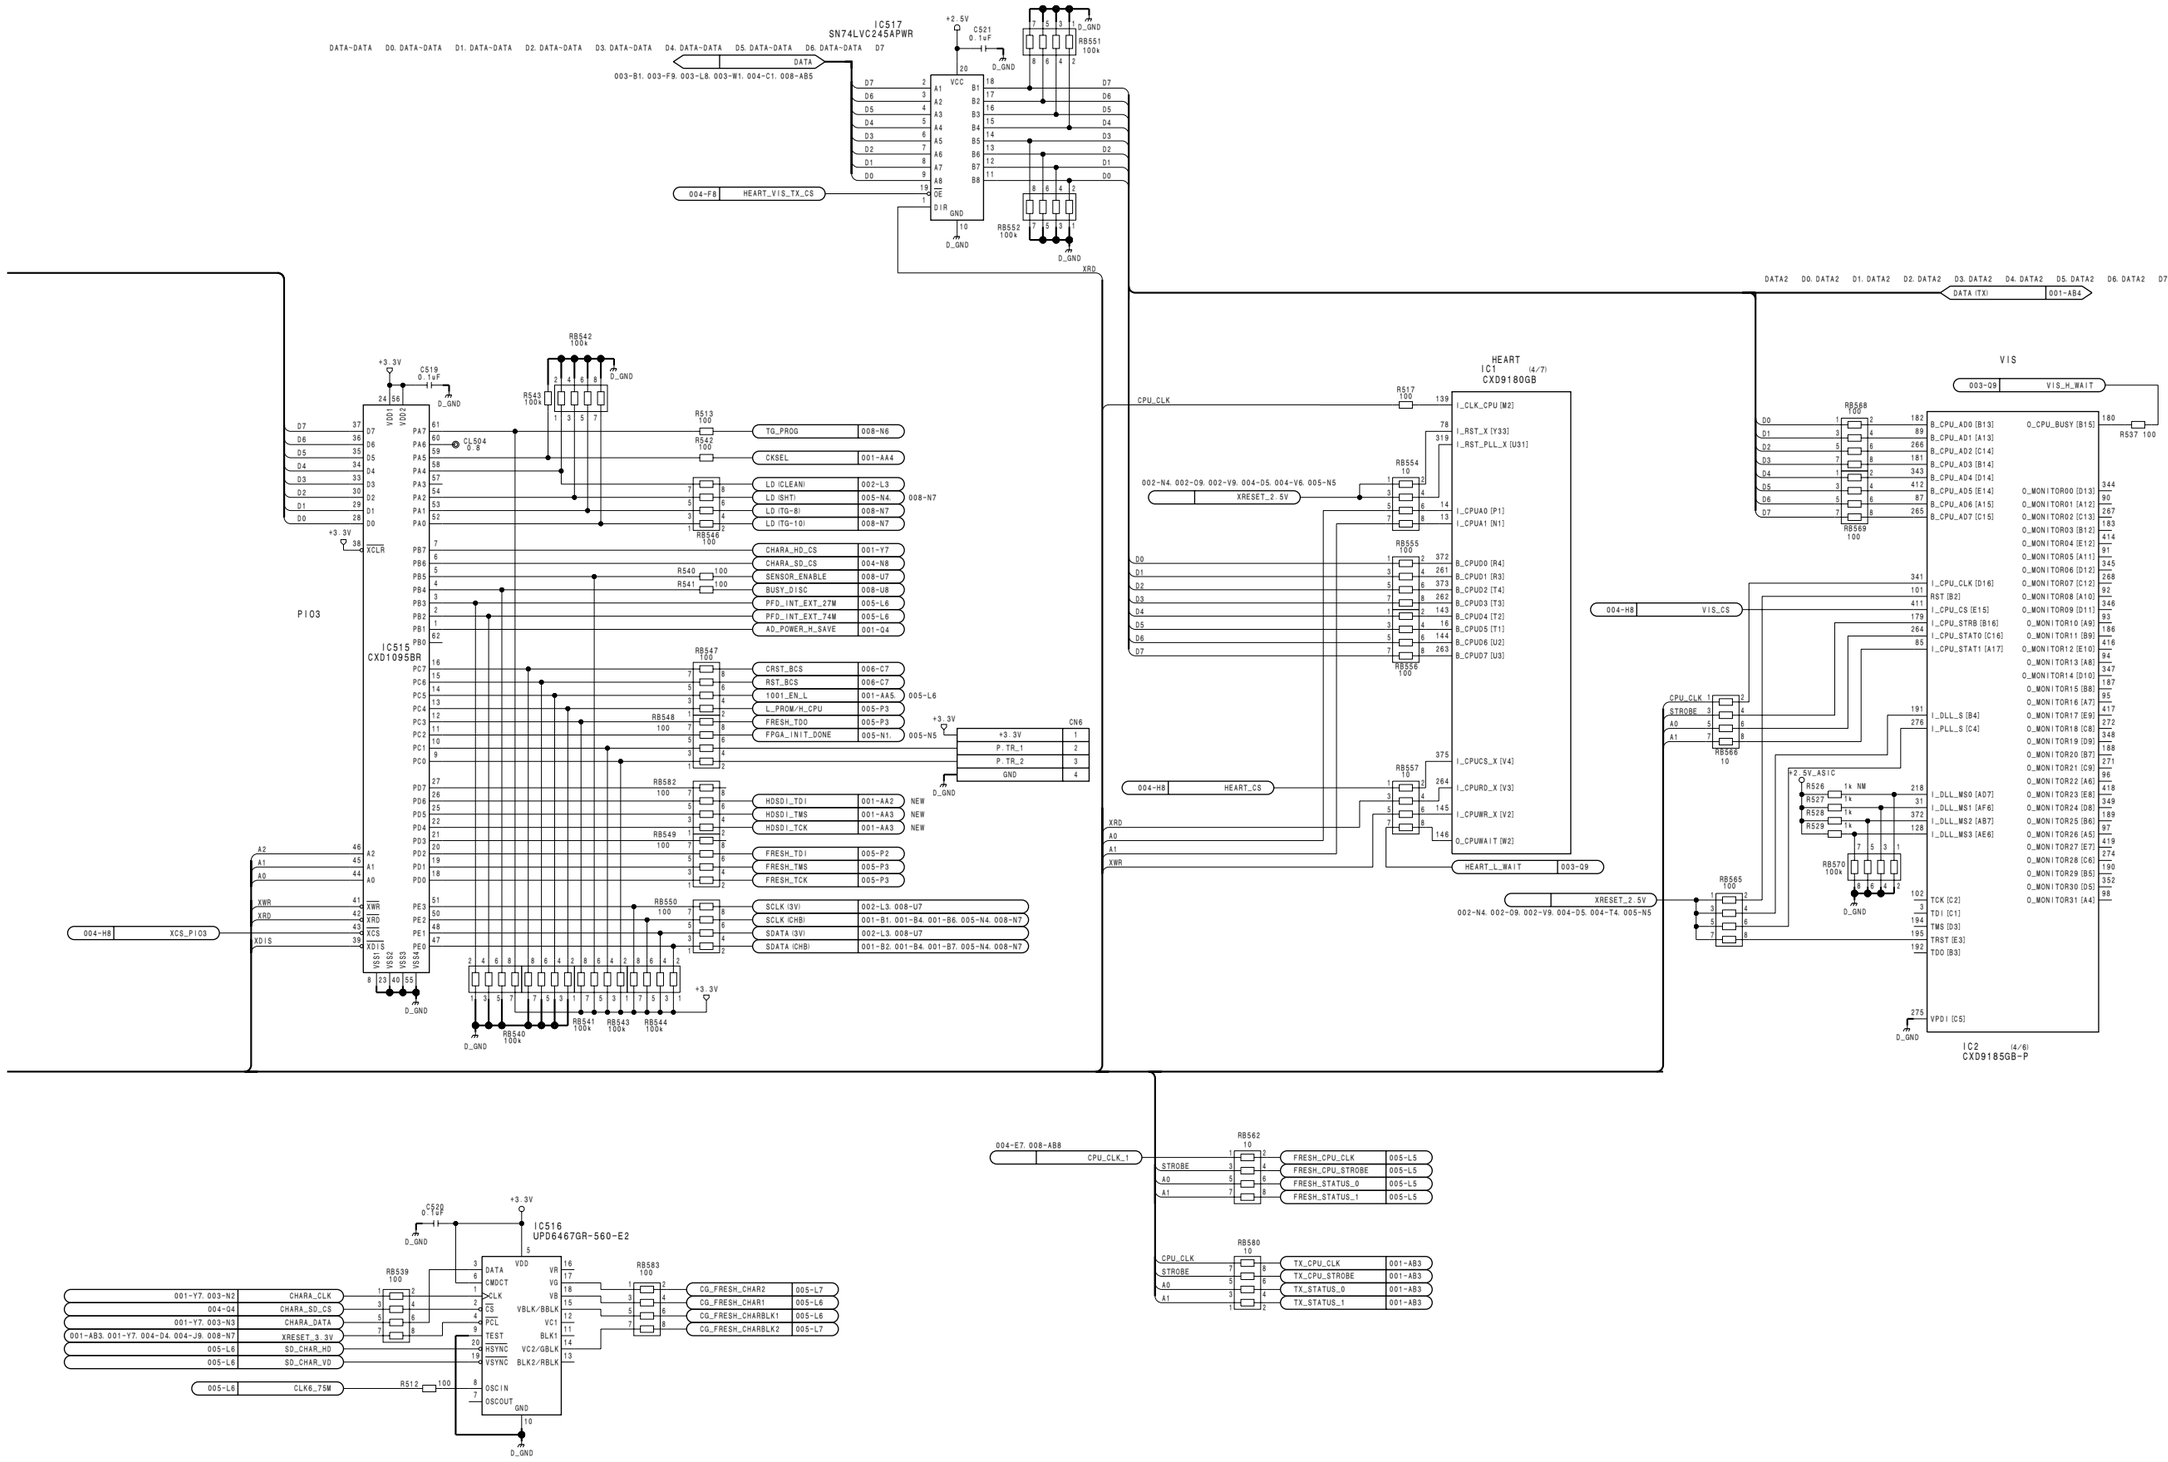
IC517
SN74LVC245APWR
IC515
CXD1095BR
HEART
IC1 (4/7)
CXD9180GB
VIS
IC2 (4/6)
CXD9185GB-P
IC516
UPD6467GR-560-E2
DATA-DATA D0. DATA-DATA D1. DATA-DATA D2. DATA-DATA D3. DATA-DATA D4. DATA-DATA D5. DATA-DATA D6. DATA-DATA D7
DATA
003-B1. 003-F9. 003-L8. 003-W1. 004-C1. 008-AB5
004-F8 HEART_VIS_TX_CS
XRD
DATA2 D0. DATA2 D1. DATA2 D2. DATA2 D3. DATA2 D4. DATA2 D5. DATA2 D6. DATA2 D7
DATA (TX) 001-AB4
CPU_CLK
002-N4. 002-09. 002-V9. 004-D5. 004-V6. 005-N5
XRESET_2.5V
004-H8 HEART_CS
HEART_L_WAIT 003-Q9
XRESET_2.5V 002-N4. 002-09. 002-V9. 004-D5. 004-T4. 005-N5
003-Q9 VIS_H_WAIT
004-H8 VIS_CS
004-H8 XCS_PIO3
PIO3
004-E7. 008-AB8 CPU_CLK_1
001-Y7. 003-N2 CHARA_CLK
004-Q4 CHARA_SD_CS
001-Y7. 003-N3 CHARA_DATA
001-AB3. 001-Y7. 004-D4. 004-J9. 008-N7 XRESET_3.3V
005-L6 SD_CHAR_HD
005-L6 SD_CHAR_VD
005-L6 CLK6_75M
+3.3V
+2.5V
D_GND
TG_PROG 008-N6
CKSEL 001-AA4
LD (CLEAN) 002-L3
LD (SHT) 005-N4
LD (TG-8) 008-N7
LD (TG-10) 008-N7
CHARA_HD_CS 001-Y7
CHARA_SD_CS 004-N8
SENSOR_ENABLE 008-U7
BUSY_DISC 008-U8
PFD_INT_EXT_27M 005-L6
PFD_INT_EXT_74M 005-L6
AD_POWER_H_SAVE 001-Q4
CRST_BCS 006-C7
RST_BCS 006-C7
1001_EN_L 001-AA5
L_PROM/H_CPU 005-P3
FRESH_TDO 005-P3
FPGA_INIT_DONE 005-N1
HDSDI_TDI 001-AA2 NEW
HDSDI_TMS 001-AA3 NEW
HDSDI_TCK 001-AA3 NEW
FRESH_TDI 005-P2
FRESH_TMS 005-P3
FRESH_TCK 005-P3
SCLK (3V) 002-L3. 008-U7
SCLK (CHB) 001-B1. 001-B4. 001-B6. 005-N4. 008-N7
SDATA (3V) 002-L3. 008-U7
SDATA (CHB) 001-B2. 001-B4. 001-B7. 005-N4. 008-N7
CN6
+3.3V 1
P.TR_1 2
P.TR_2 3
GND 4
FRESH_CPU_CLK 005-L5
FRESH_CPU_STROBE 005-L5
FRESH_STATUS_0 005-L5
FRESH_STATUS_1 005-L5
TX_CPU_CLK 001-AB3
TX_CPU_STROBE 001-AB3
TX_STATUS_0 001-AB3
TX_STATUS_1 001-AB3
CG_FRESH_CHAR2 005-L7
CG_FRESH_CHAR1 005-L6
CG_FRESH_CHARBLK1 005-L6
CG_FRESH_CHARBLK2 005-L7
I_CLK_CPU [M2]
I_RST_X [Y33]
I_RST_PLL_X [U31]
I_CPUA0 [P1]
I_CPUA1 [N1]
B_CPUD0 [R4]
B_CPUD1 [R3]
B_CPUD2 [T4]
B_CPUD3 [T3]
B_CPUD4 [T2]
B_CPUD5 [T1]
B_CPUD6 [U2]
B_CPUD7 [U3]
I_CPUCS_X [V4]
I_CPURD_X [V3]
I_CPUWR_X [V2]
O_CPUWAIT [W2]
B_CPU_AD0 [B13]
B_CPU_AD1 [A13]
B_CPU_AD2 [C14]
B_CPU_AD3 [B14]
B_CPU_AD4 [D14]
B_CPU_AD5 [E14]
B_CPU_AD6 [A15]
B_CPU_AD7 [C15]
I_CPU_CLK [D16]
RST [B2]
I_CPU_CS [E15]
I_CPU_STRB [B16]
I_CPU_STAT0 [C16]
I_CPU_STAT1 [A17]
I_DLL_S [B4]
I_PLL_S [C4]
O_CPU_BUSY [B15]
O_MONITOR00 [D13]
O_MONITOR01 [A12]
O_MONITOR02 [C13]
O_MONITOR03 [B12]
O_MONITOR04 [E12]
O_MONITOR05 [A11]
O_MONITOR06 [D12]
O_MONITOR07 [C12]
O_MONITOR08 [A10]
O_MONITOR09 [D11]
O_MONITOR10 [A9]
O_MONITOR11 [B9]
O_MONITOR12 [E10]
O_MONITOR13 [A8]
O_MONITOR14 [D10]
O_MONITOR15 [B8]
O_MONITOR16 [A7]
O_MONITOR17 [E9]
O_MONITOR18 [C8]
O_MONITOR19 [D9]
O_MONITOR20 [B7]
O_MONITOR21 [C9]
O_MONITOR22 [A6]
O_MONITOR23 [E8]
O_MONITOR24 [D8]
O_MONITOR25 [B6]
O_MONITOR26 [A5]
O_MONITOR27 [E7]
O_MONITOR28 [C6]
O_MONITOR29 [B5]
O_MONITOR30 [D5]
O_MONITOR31 [A4]
I_DLL_MS0 [AD7]
I_DLL_MS1 [AF6]
I_DLL_MS2 [AB7]
I_DLL_MS3 [AE6]
TCK [C2]
TDI [C1]
TMS [D3]
TRST [E3]
TDO [B3]
VPDI [C5]
+2.5V_ASIC
1k NM
1k
R512 100
R537 100

DCP-37A (5/8)
SUFFIX: -12

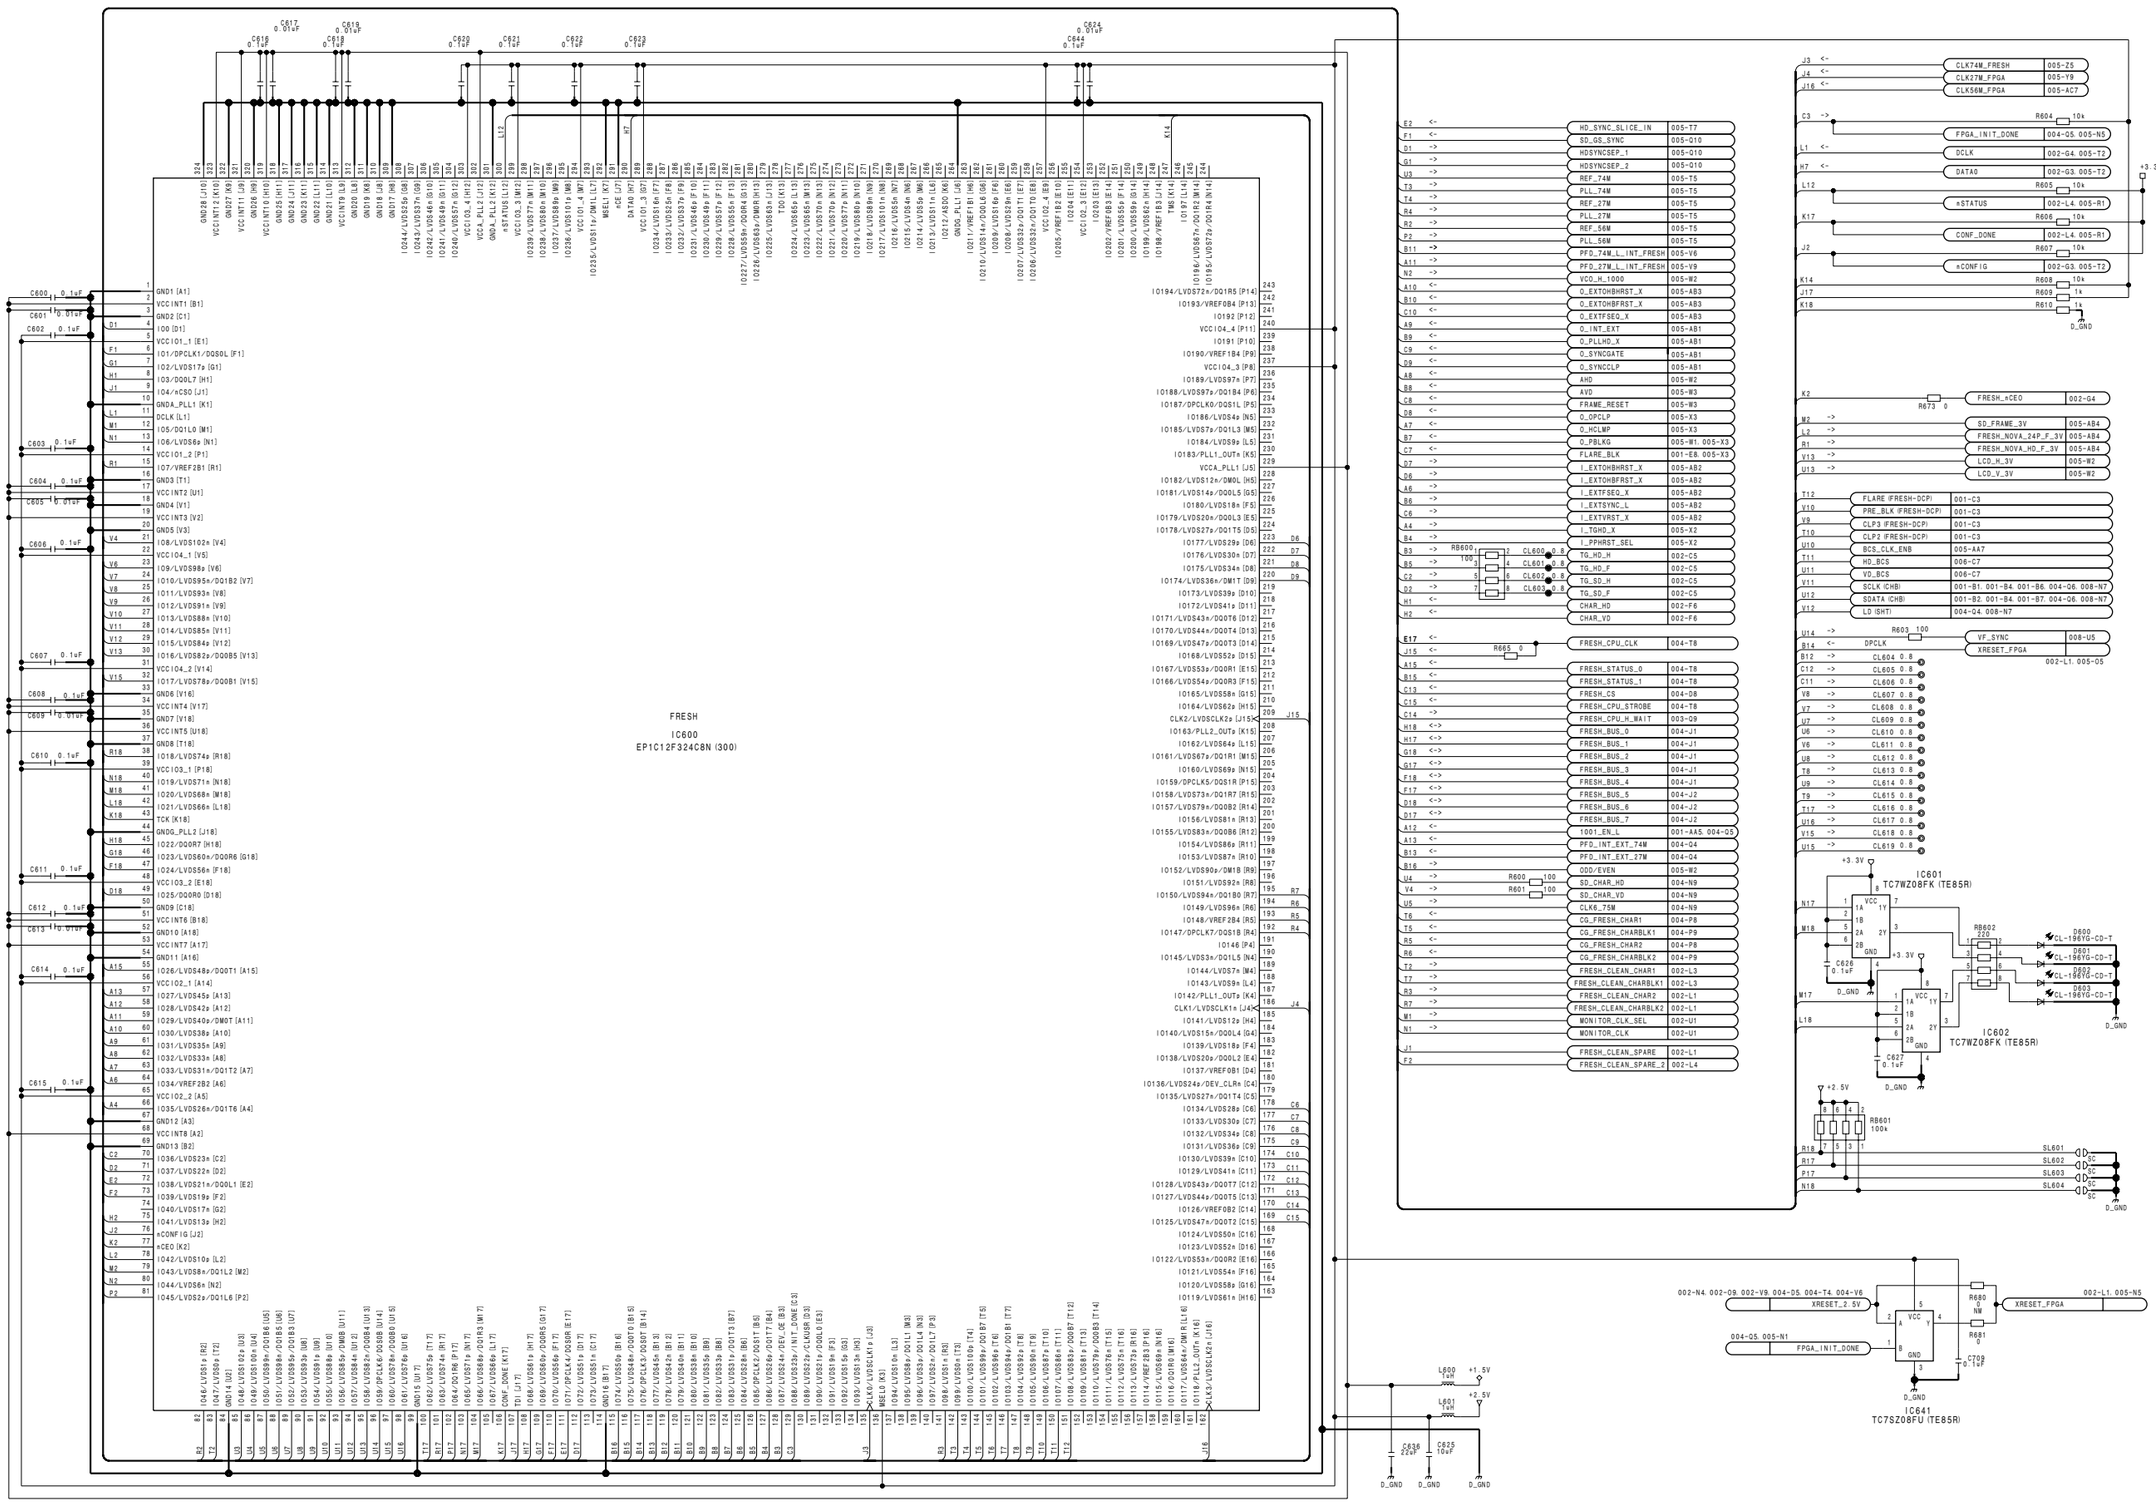

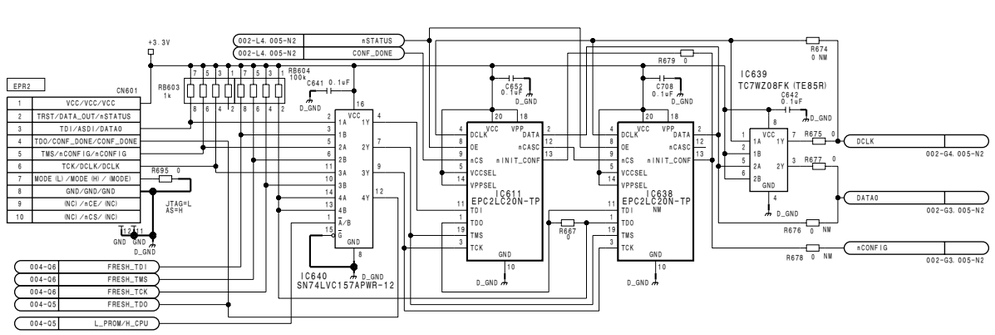

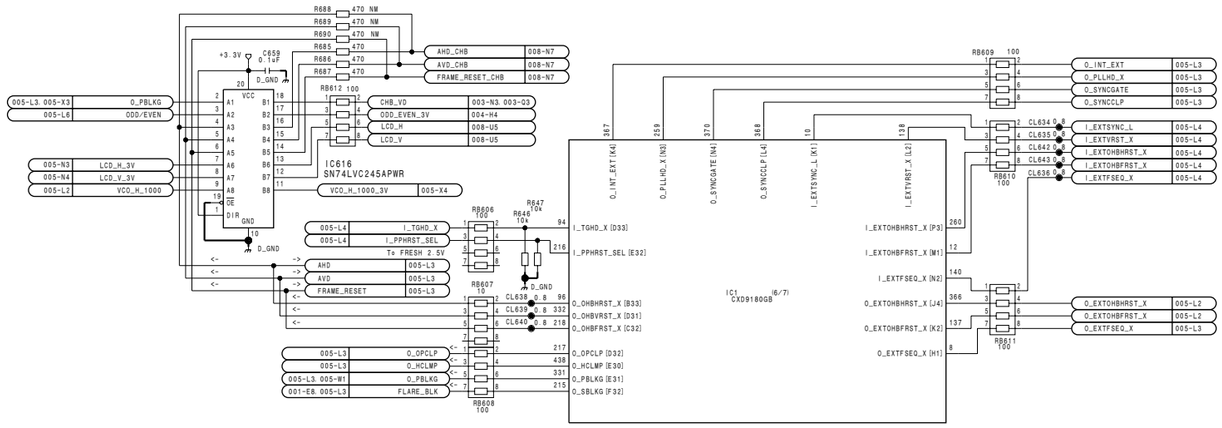

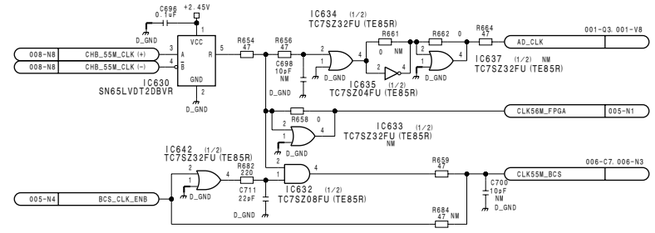

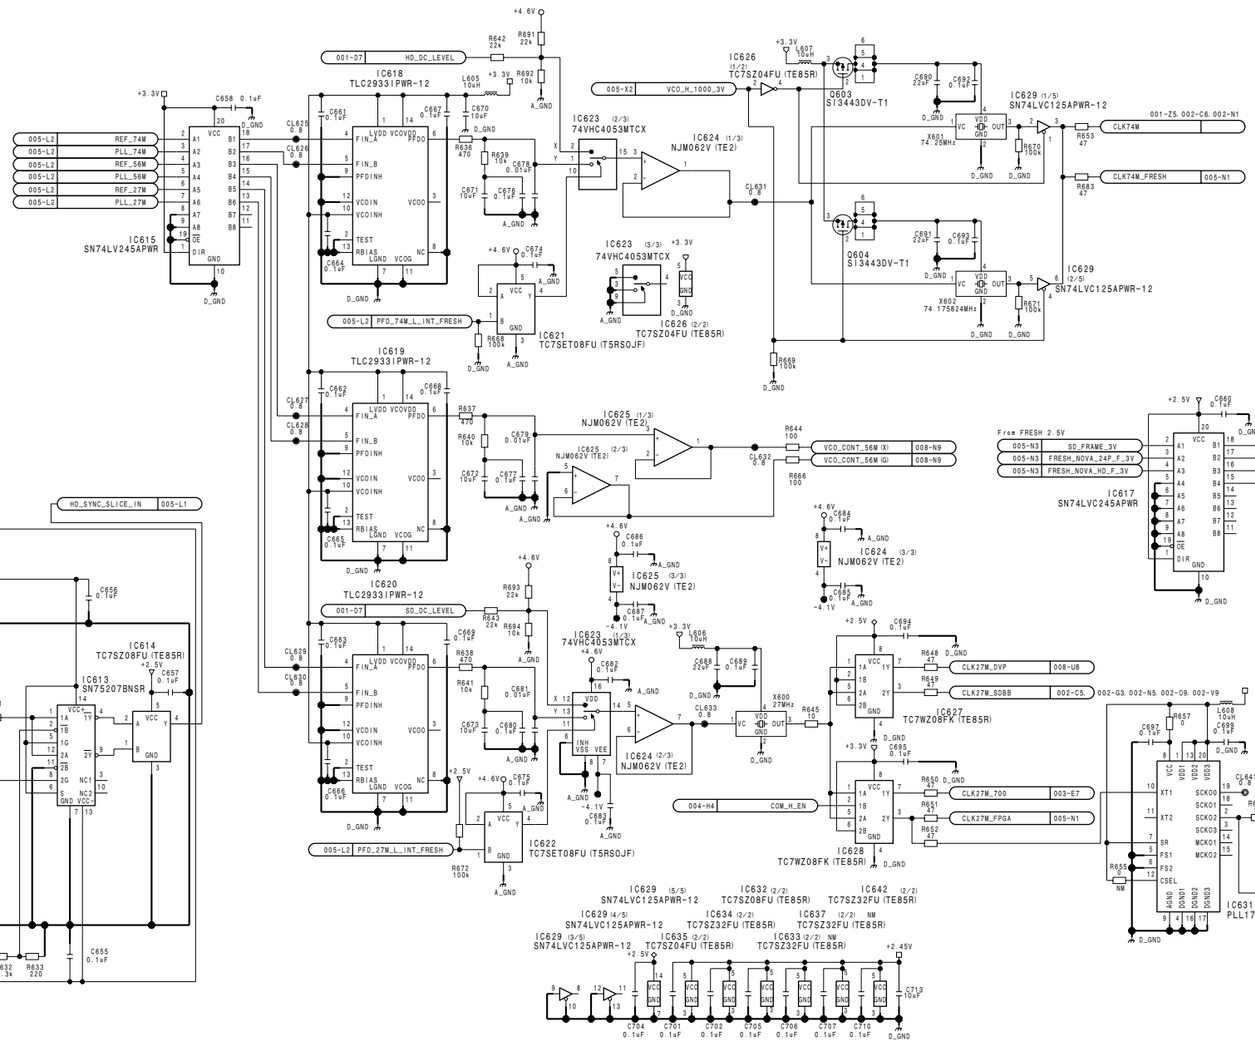

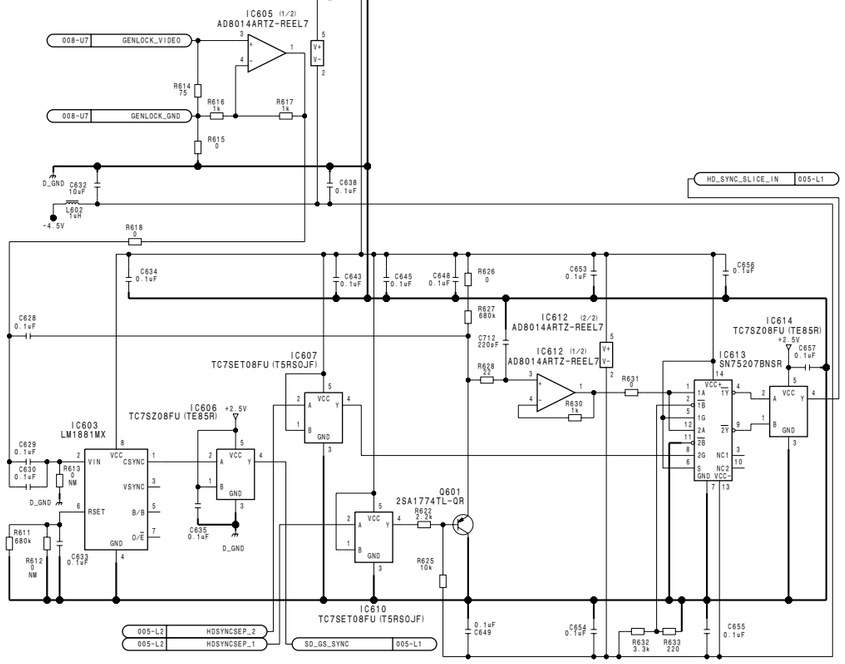

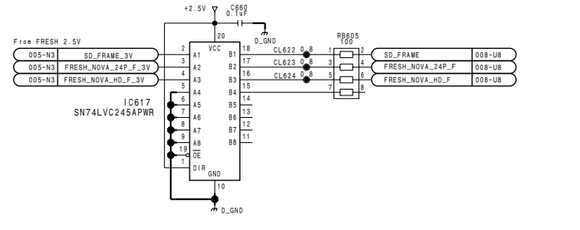

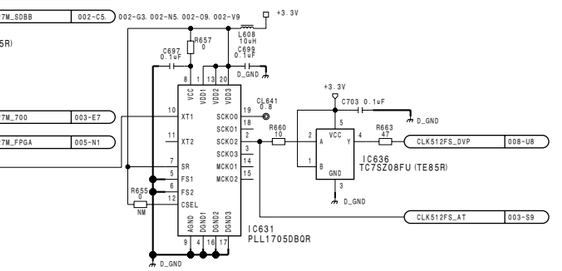

DCP-37A (5/8)
BOARD NO. 1-869-485-12
PDW-F330K_DCP-37A_122_5

DCP-37A (6/8)
SUFFIX: -12

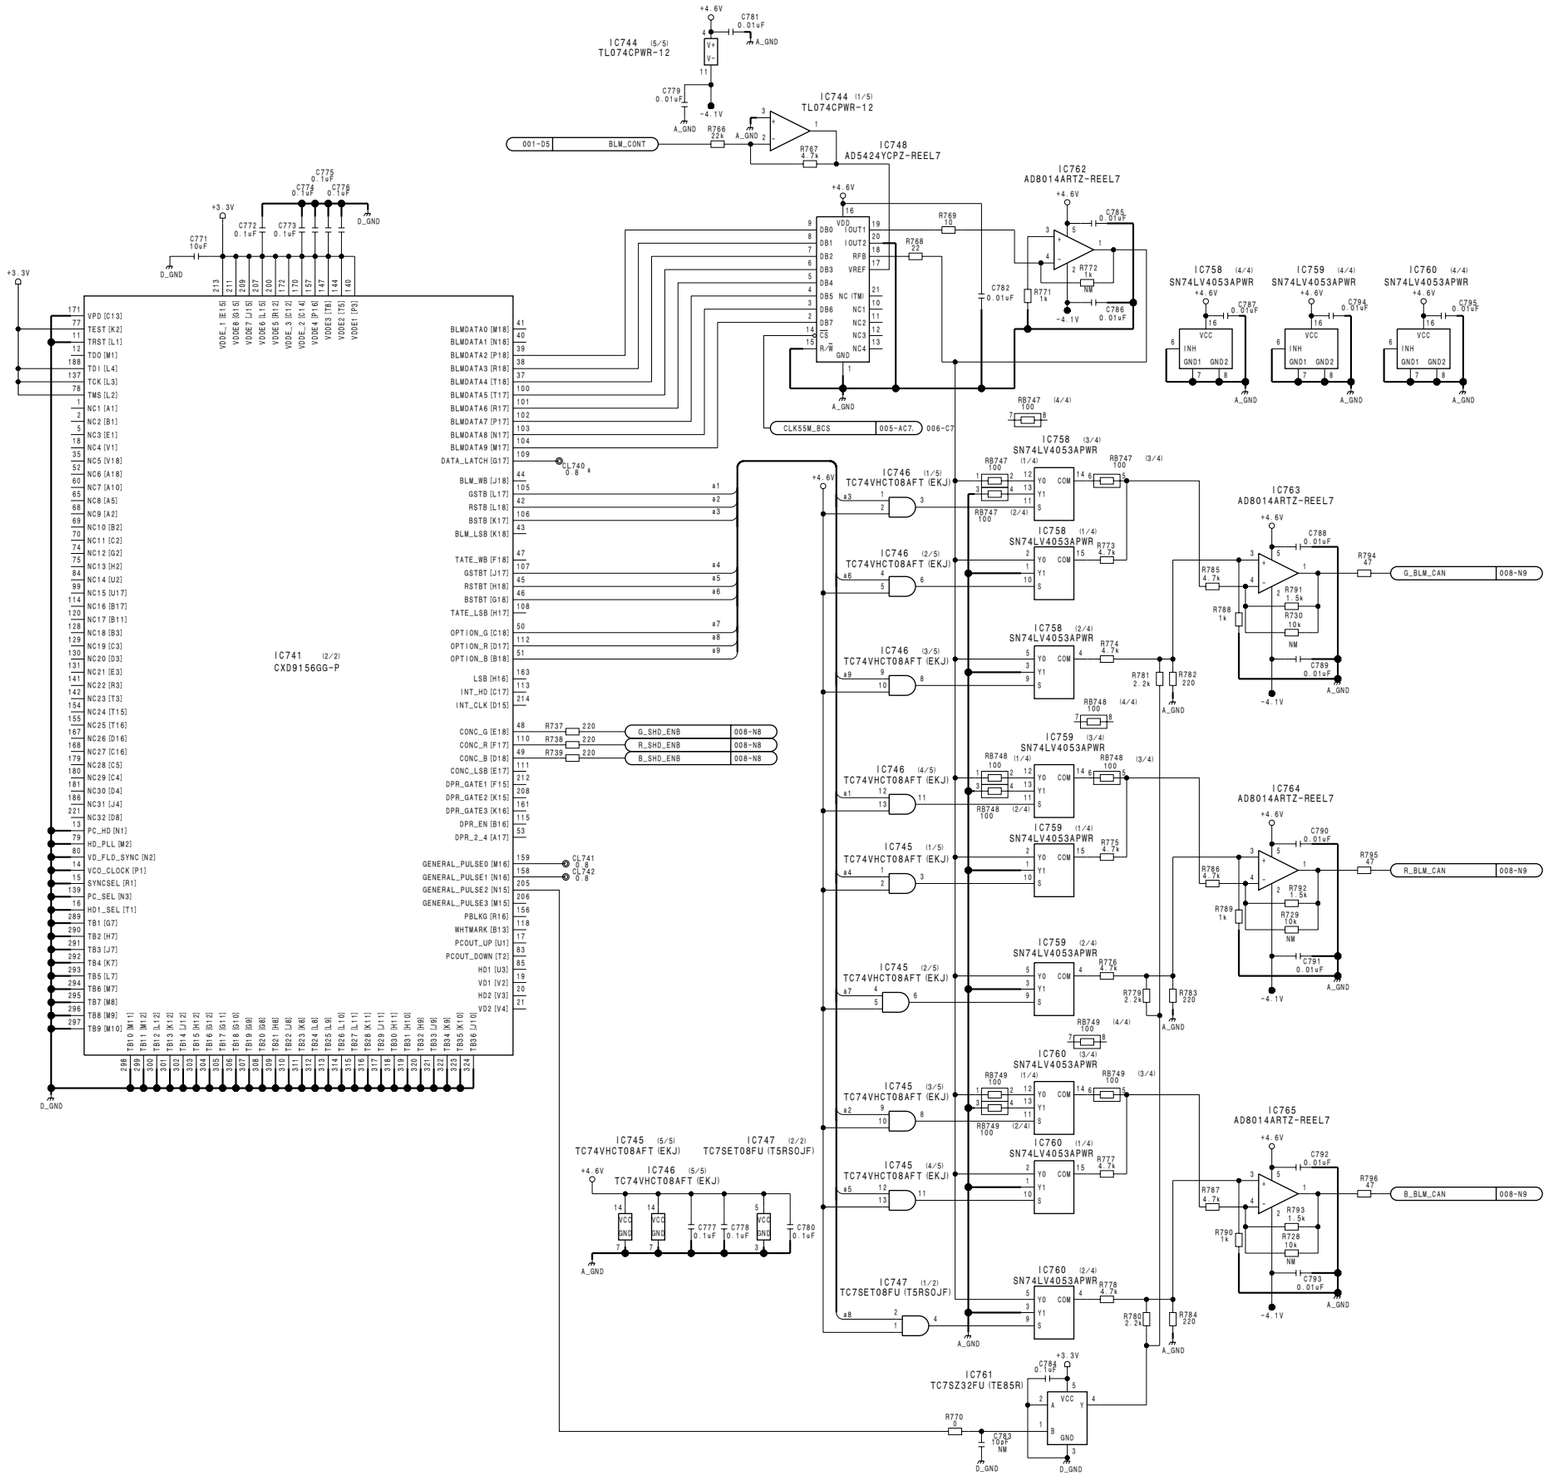

4-36

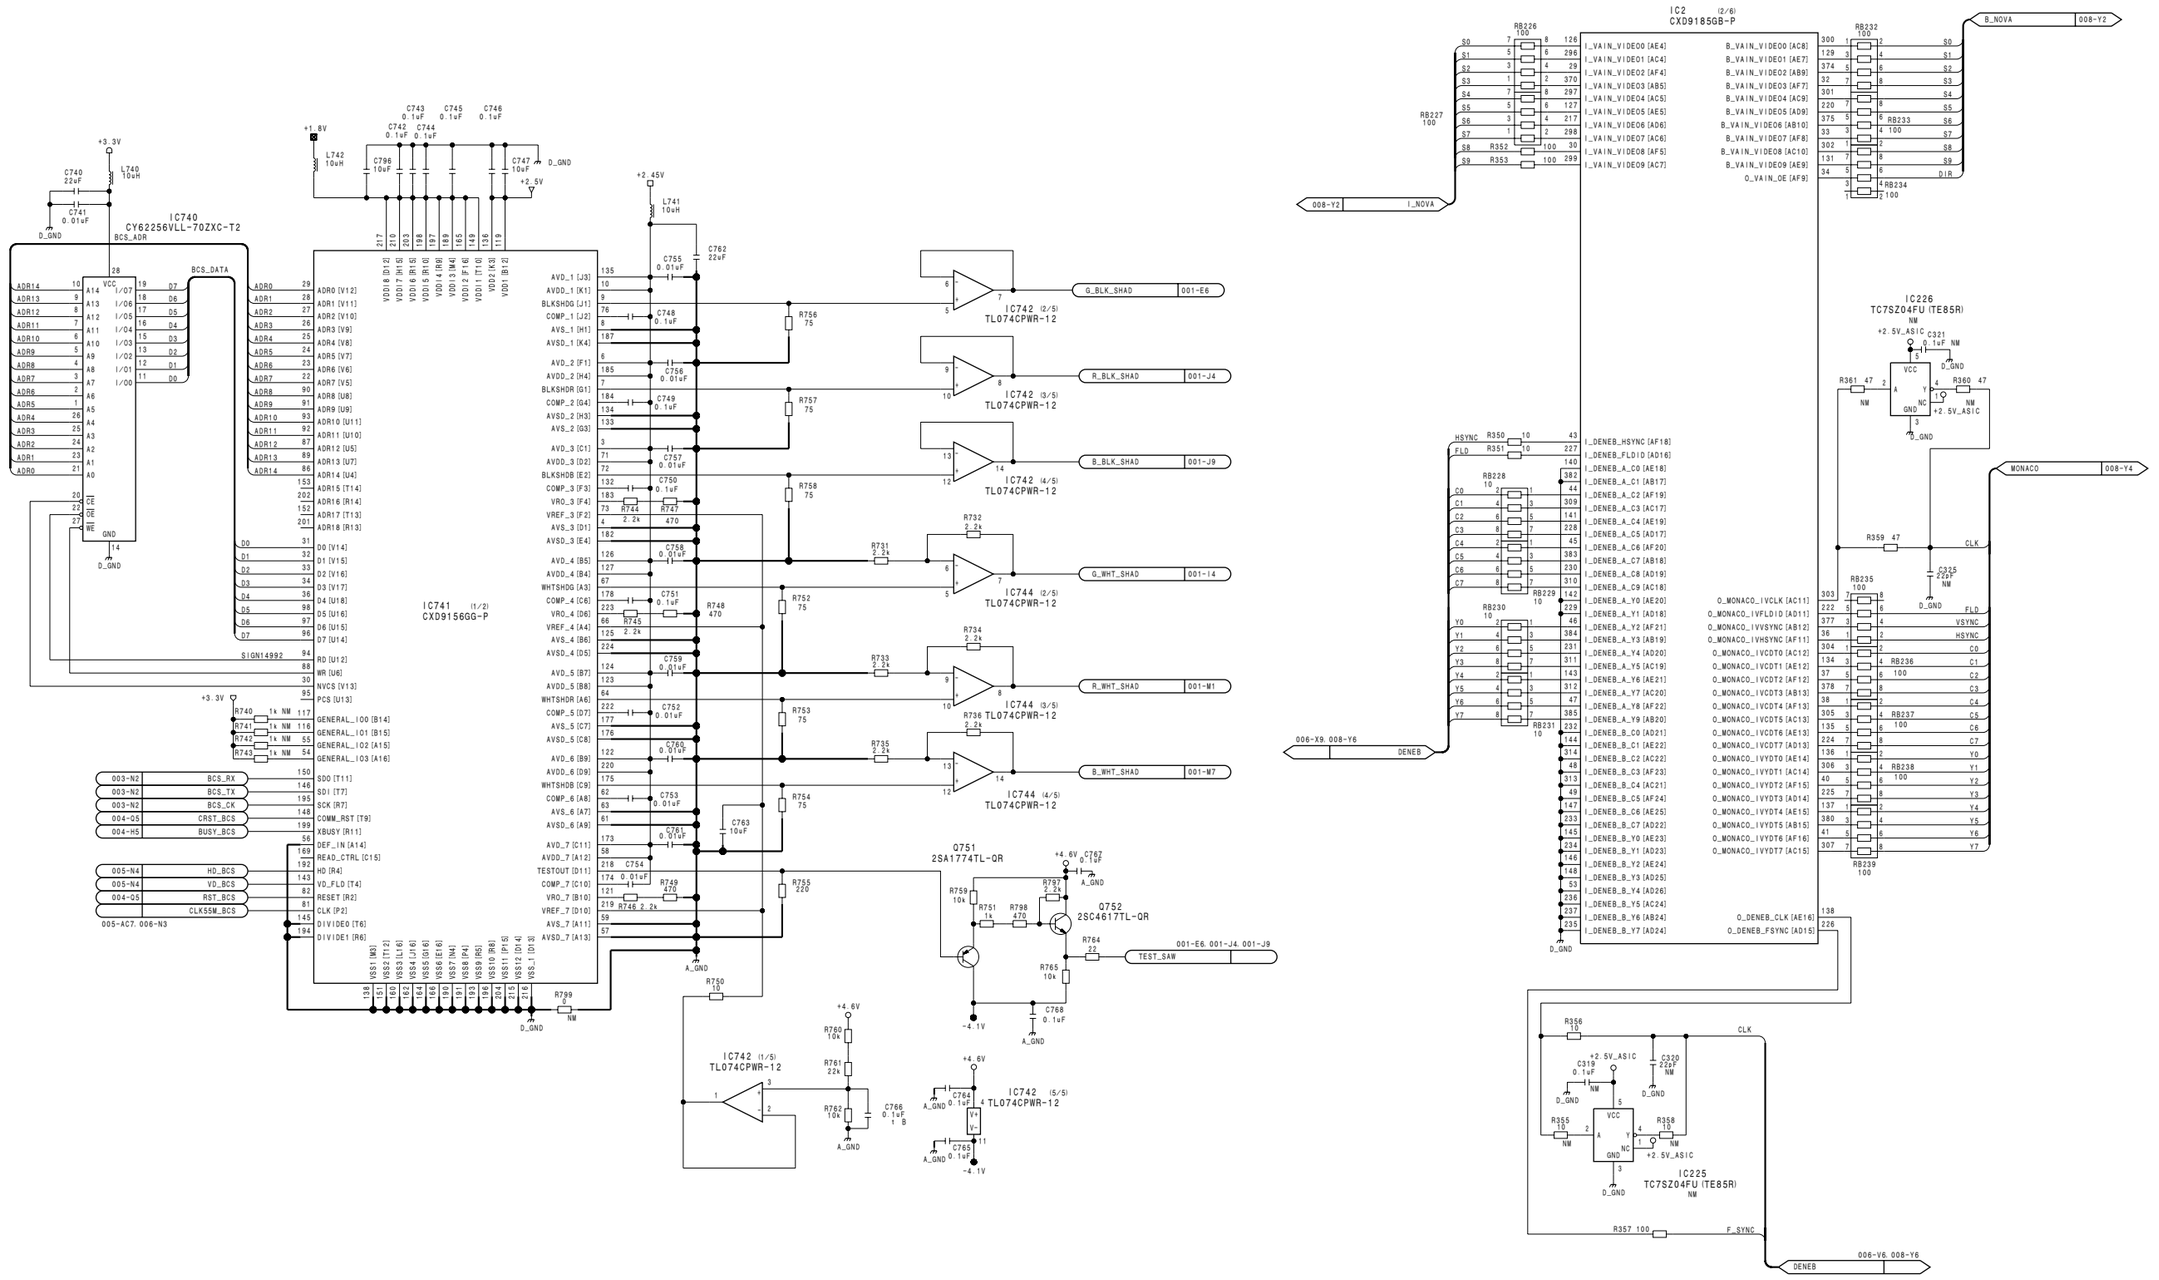

DCP-37A (6/8)
BOARD NO. 1-869-485-12
PDW-F330K_DCP-37A_122_6

DCP-37A (7/8)
SUFFIX: -12

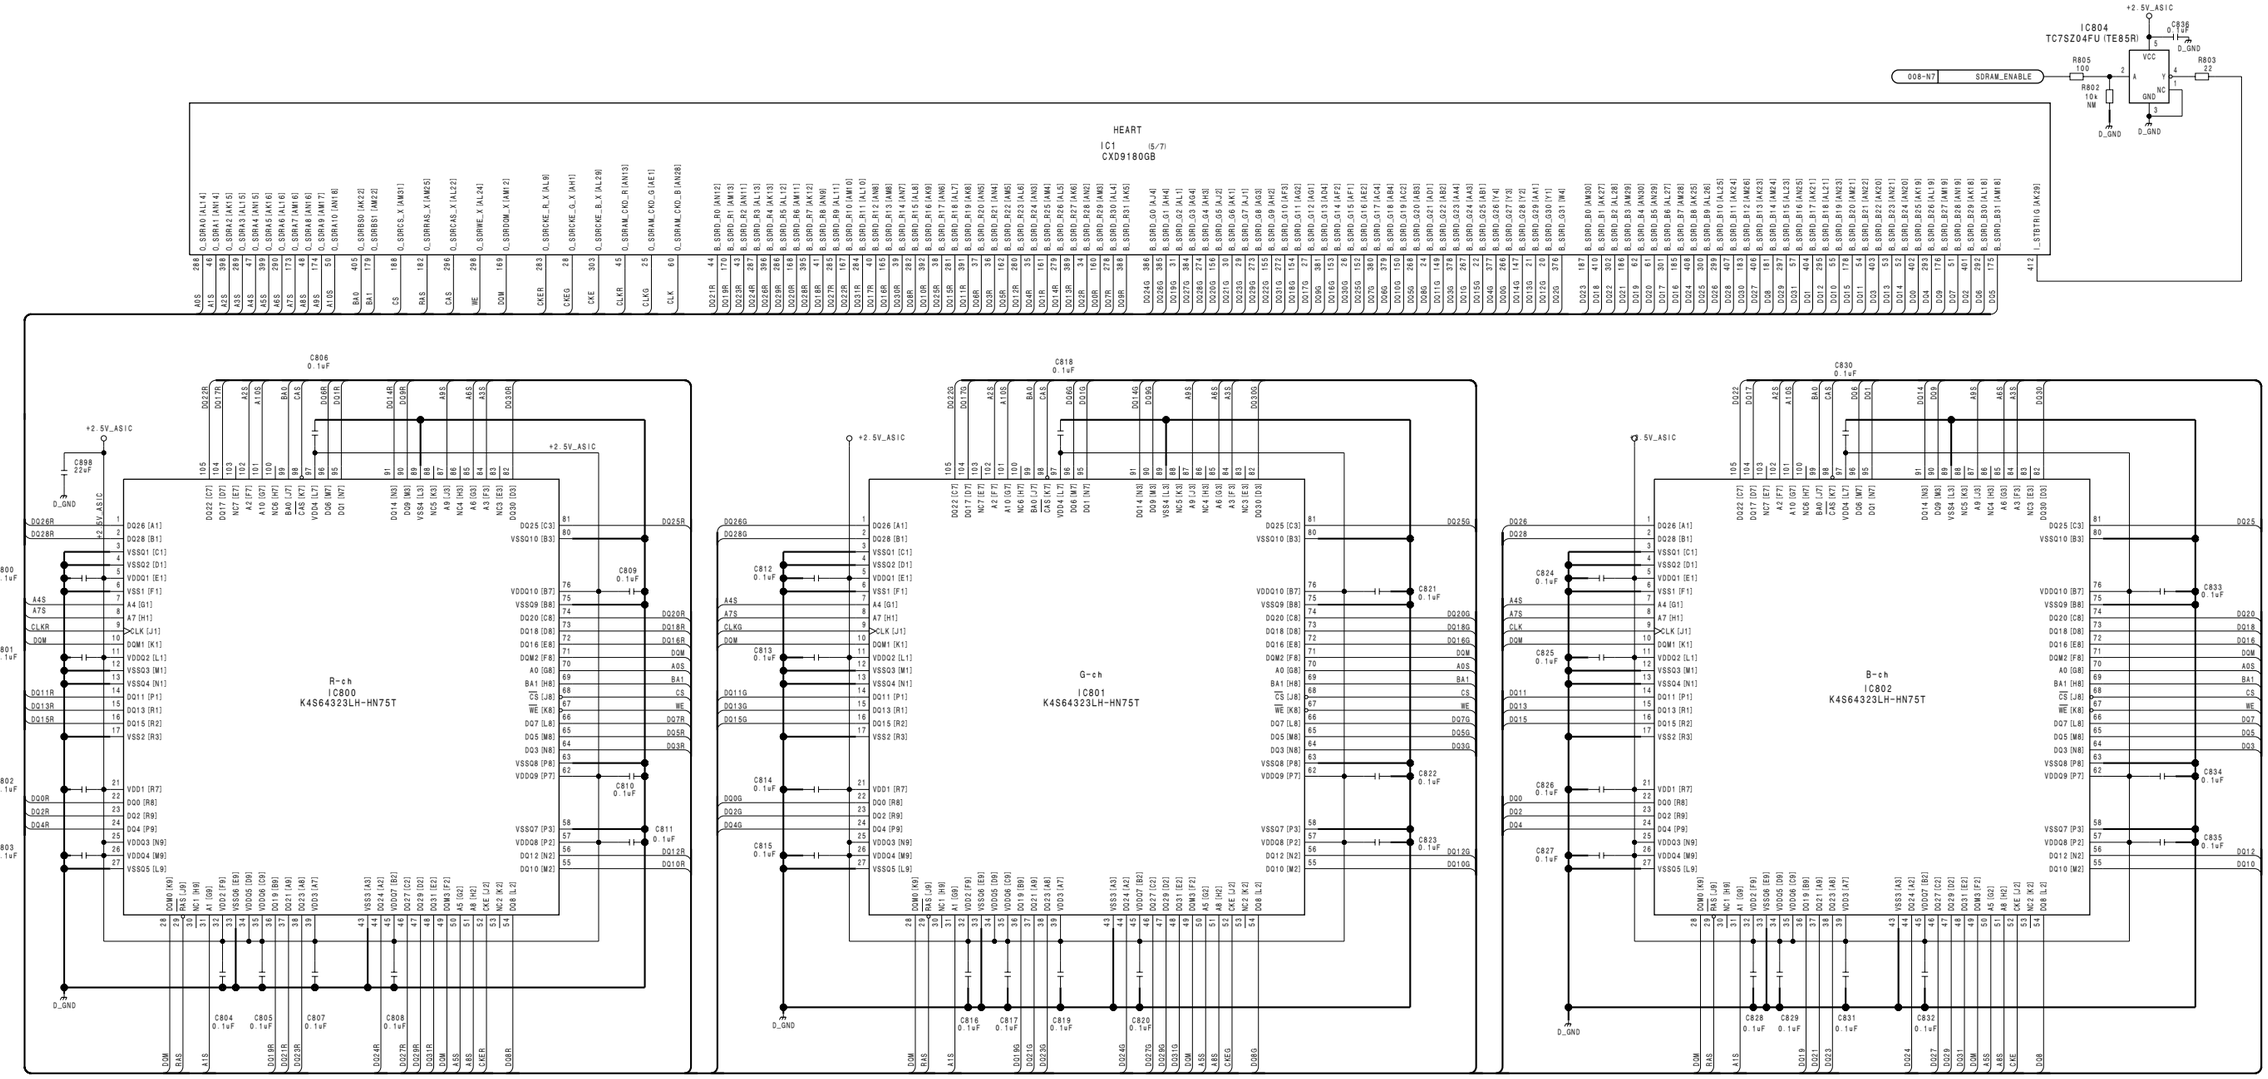

4-38

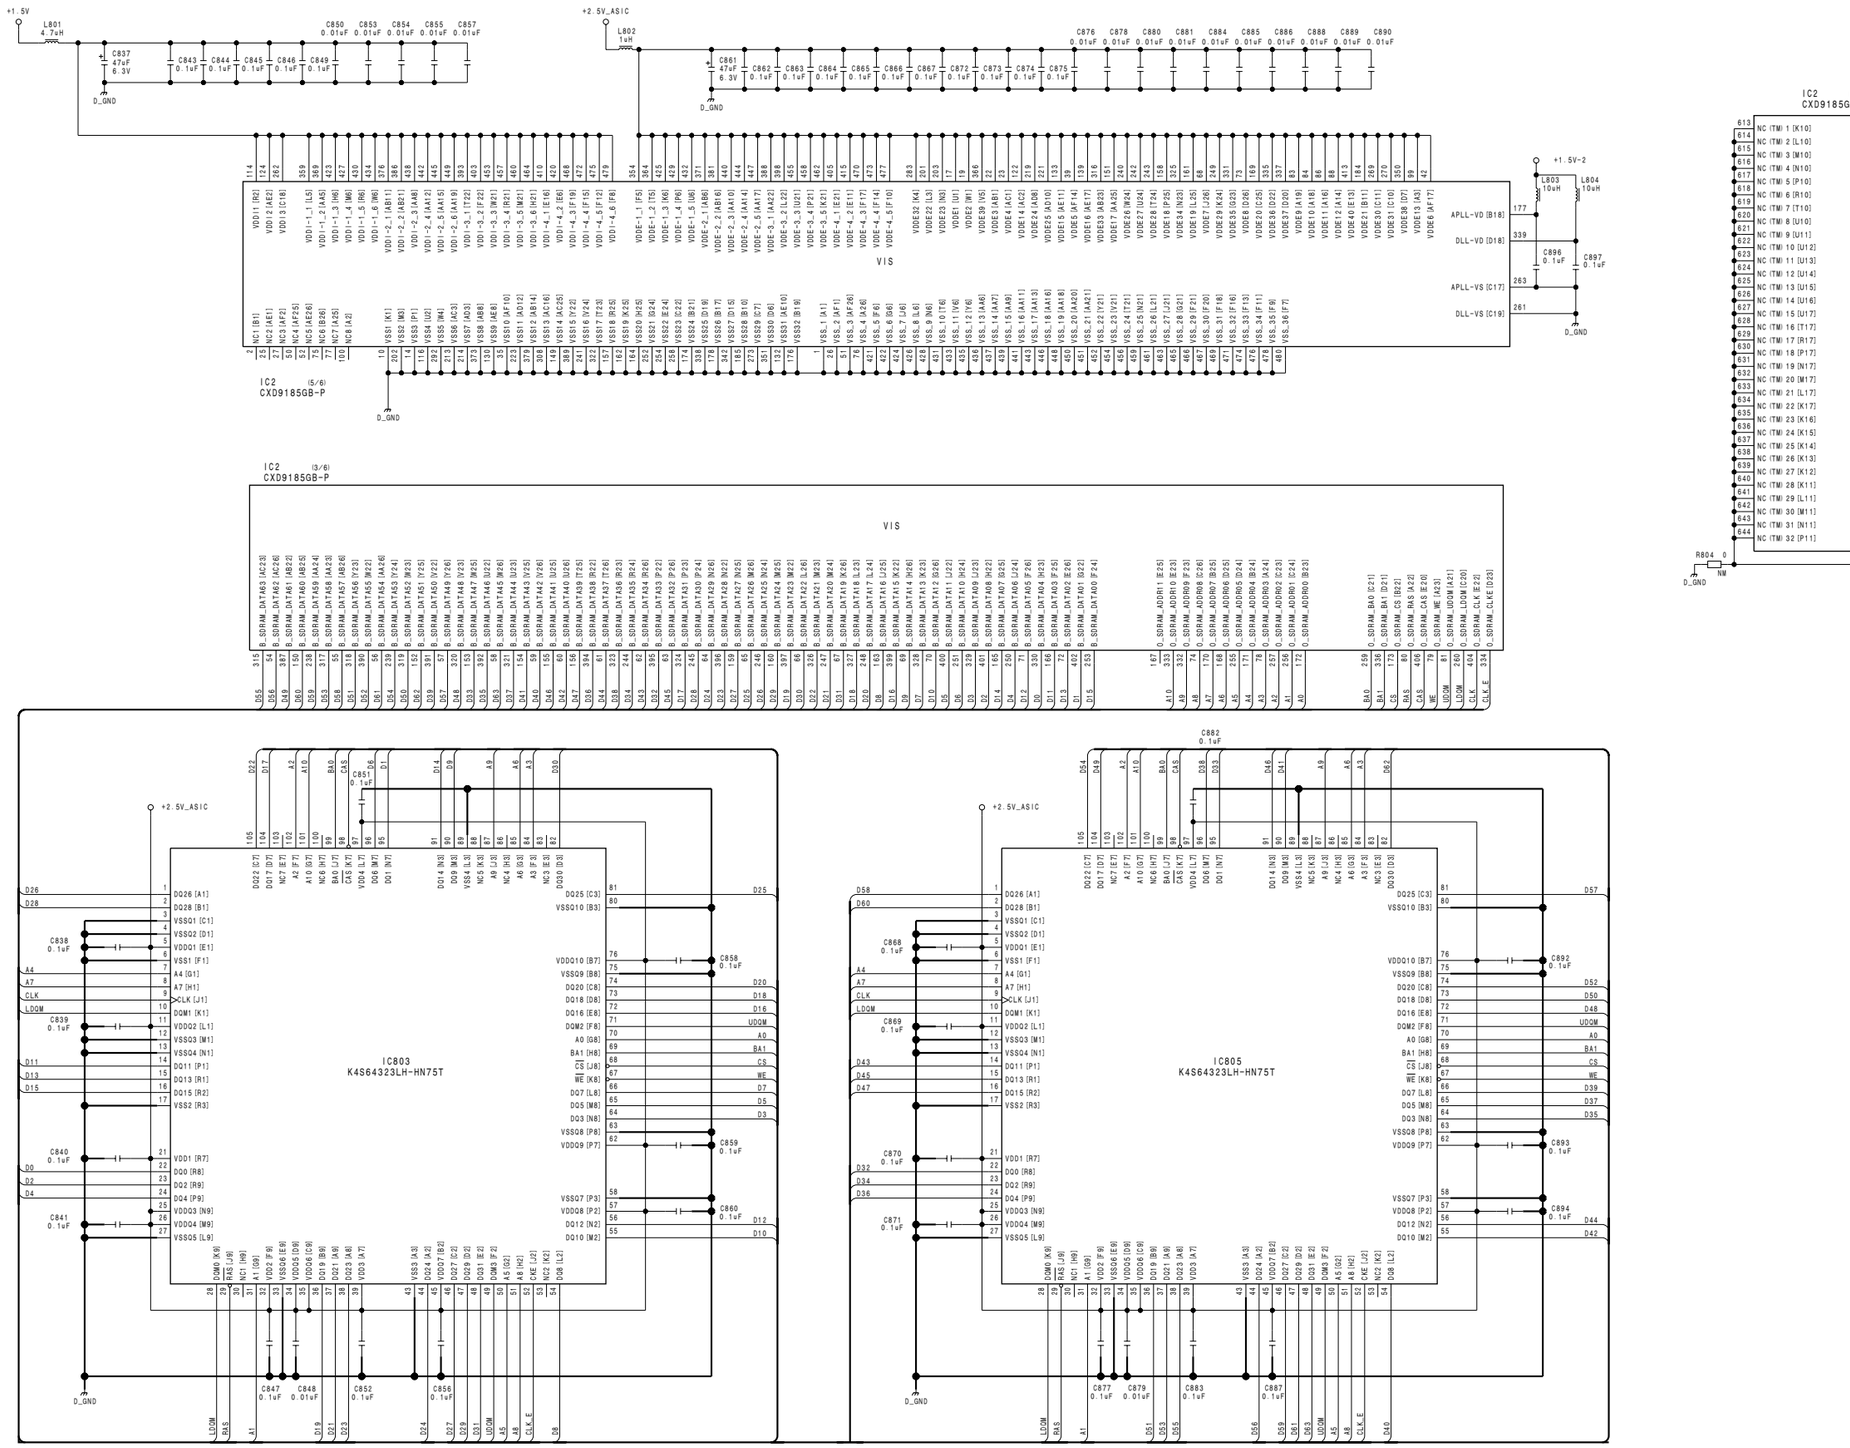

DCP-37A (7/8)
BOARD NO. 1-869-485-12
PDW-F330K_DCP-37A_122_7

DCP-37A (8/8)
SUFFIX: -12

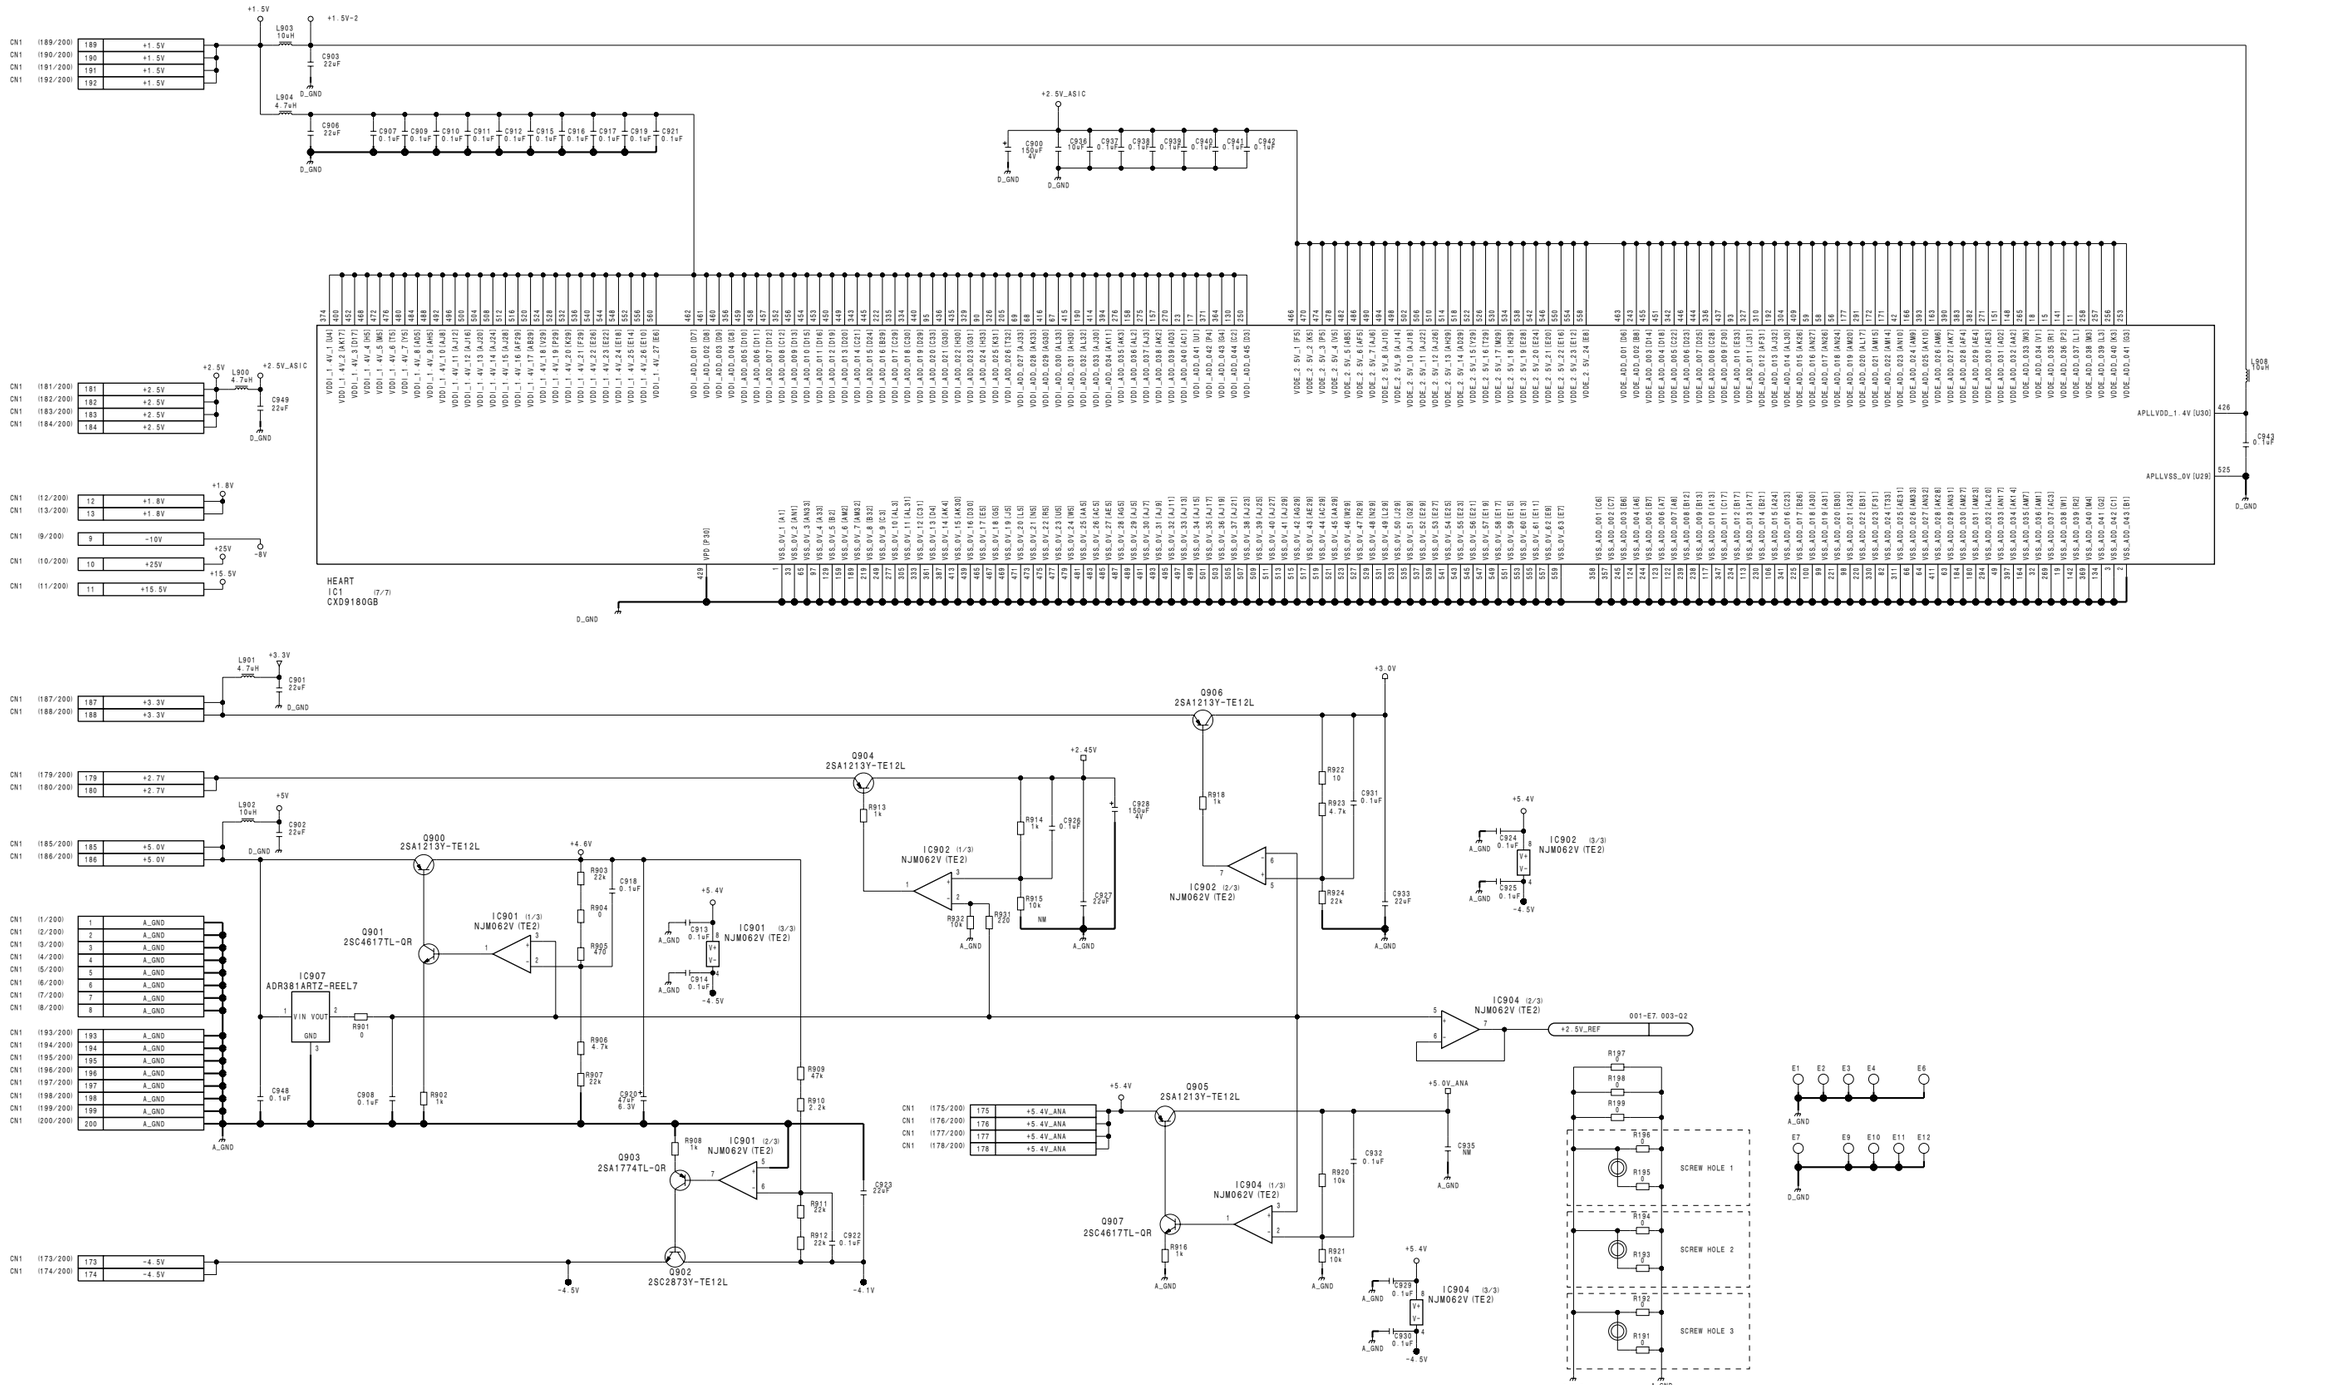

DCP-37A (8/8) **SUFFIX: -12**

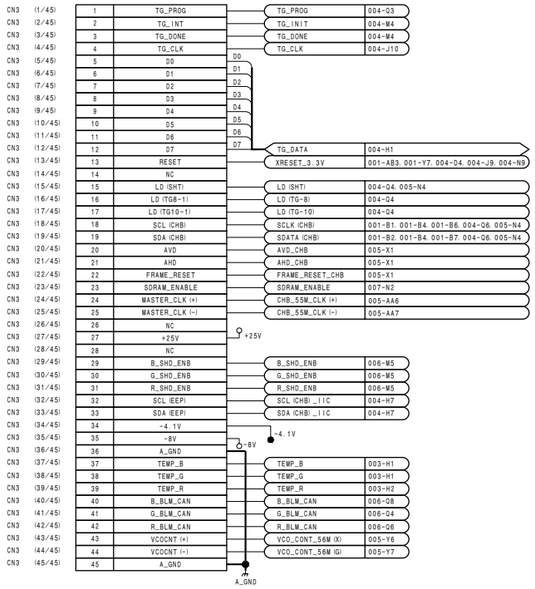

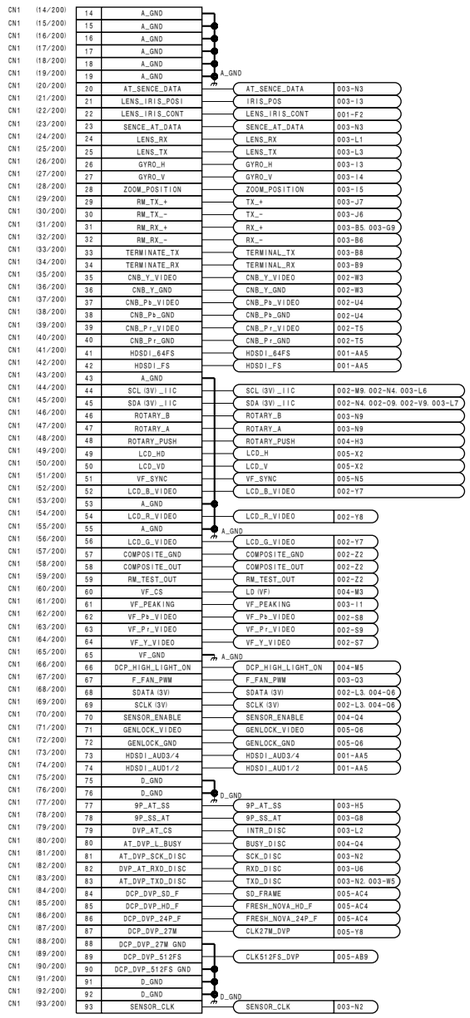

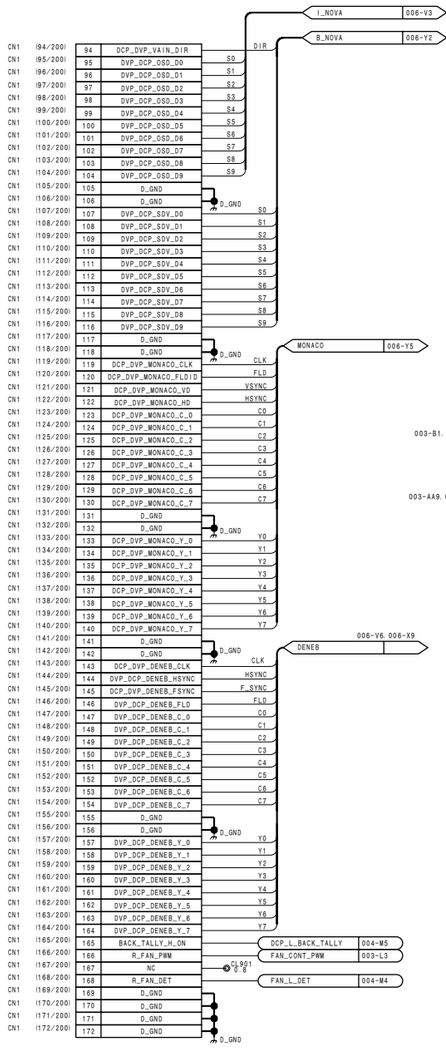

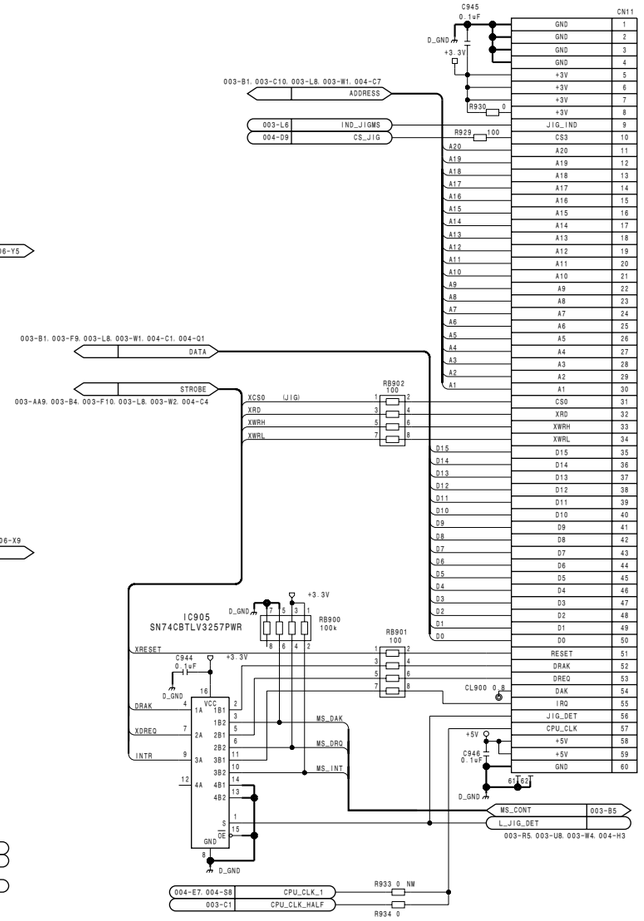

DCP-37A (8/8)
BOARD NO. 1-869-485-12
PDW-F330K_DCP-37A_122_8

DIF-167 **SUFFIX: -11**

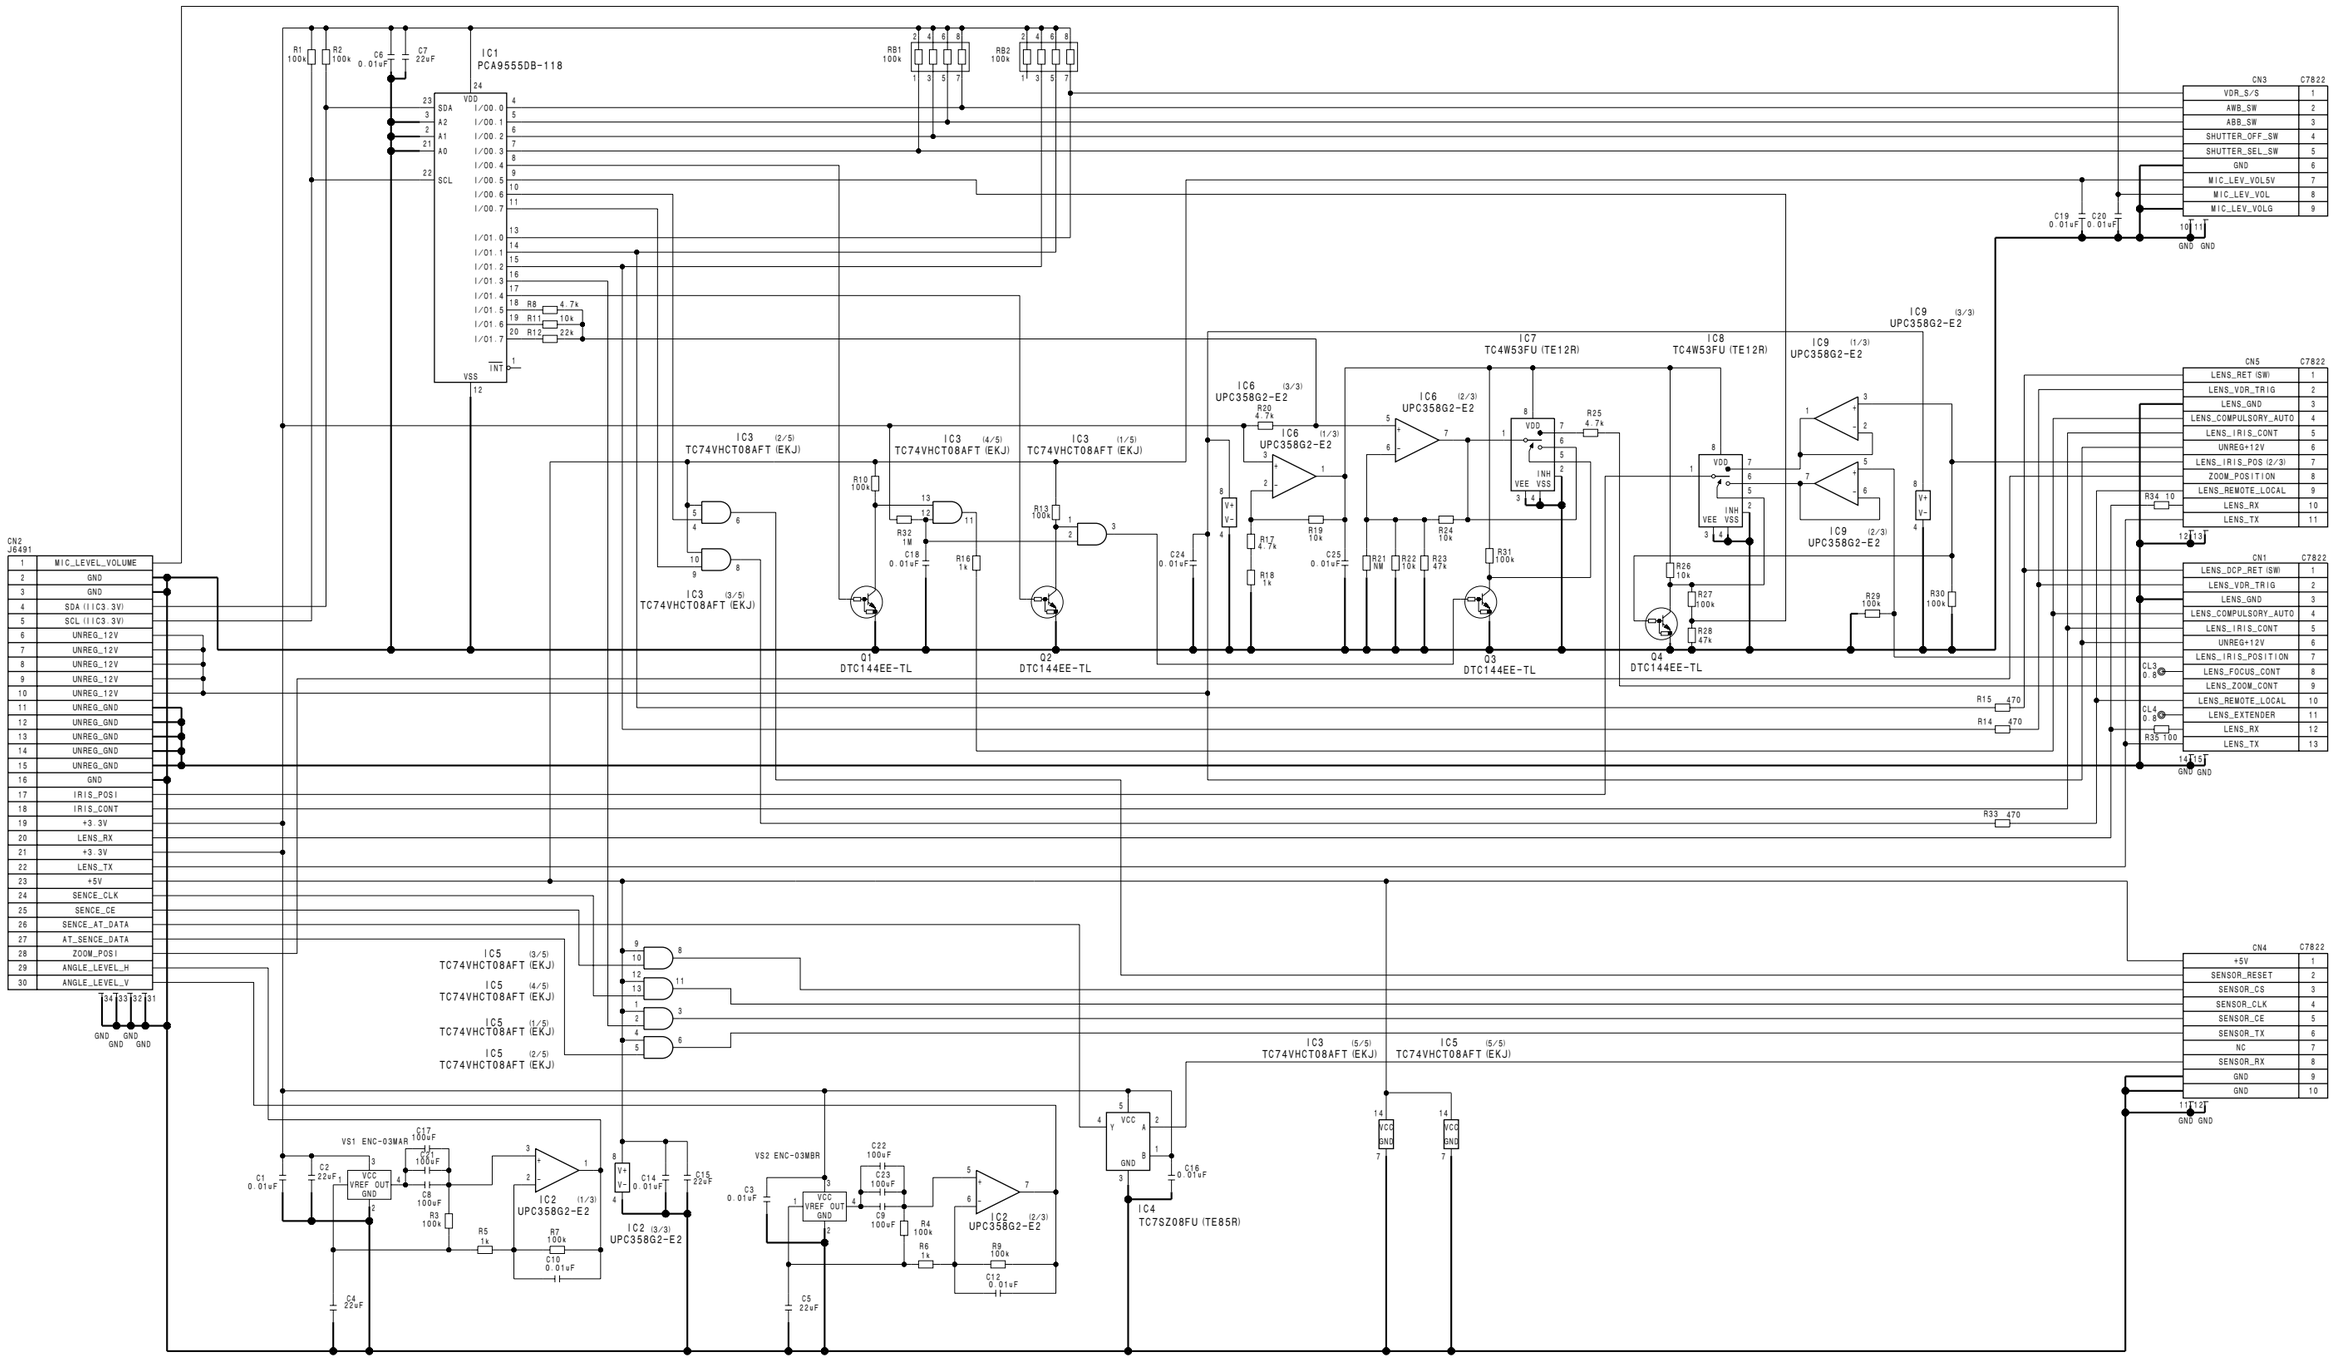

DIF-167
BOARD NO. 1-869-487-11
PDW-F330K_DIF-167_112_1

DR-550G (1/7)
SUFFIX: -21

POWER

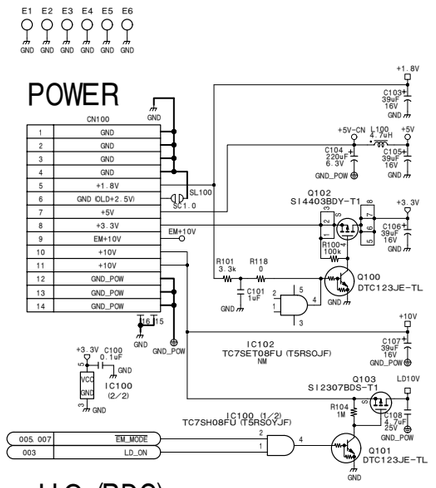

JIG (BDC)

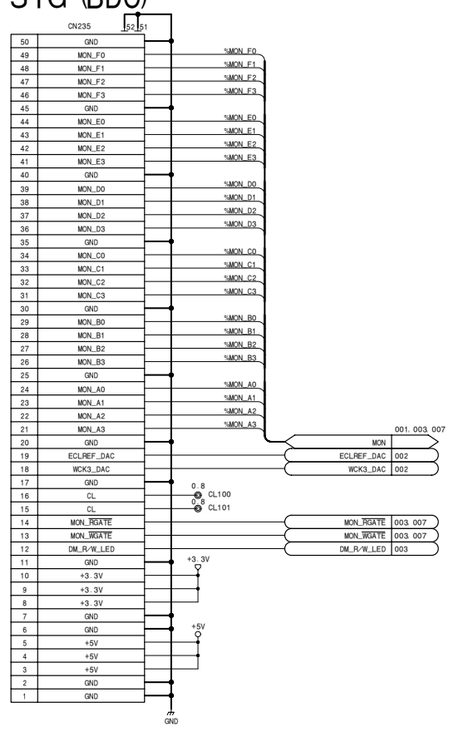

JIG (BOOT)

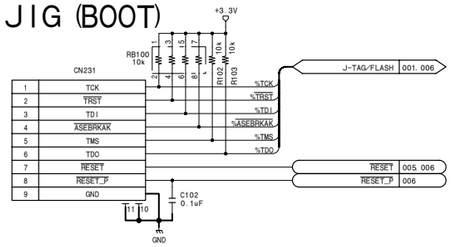

OP

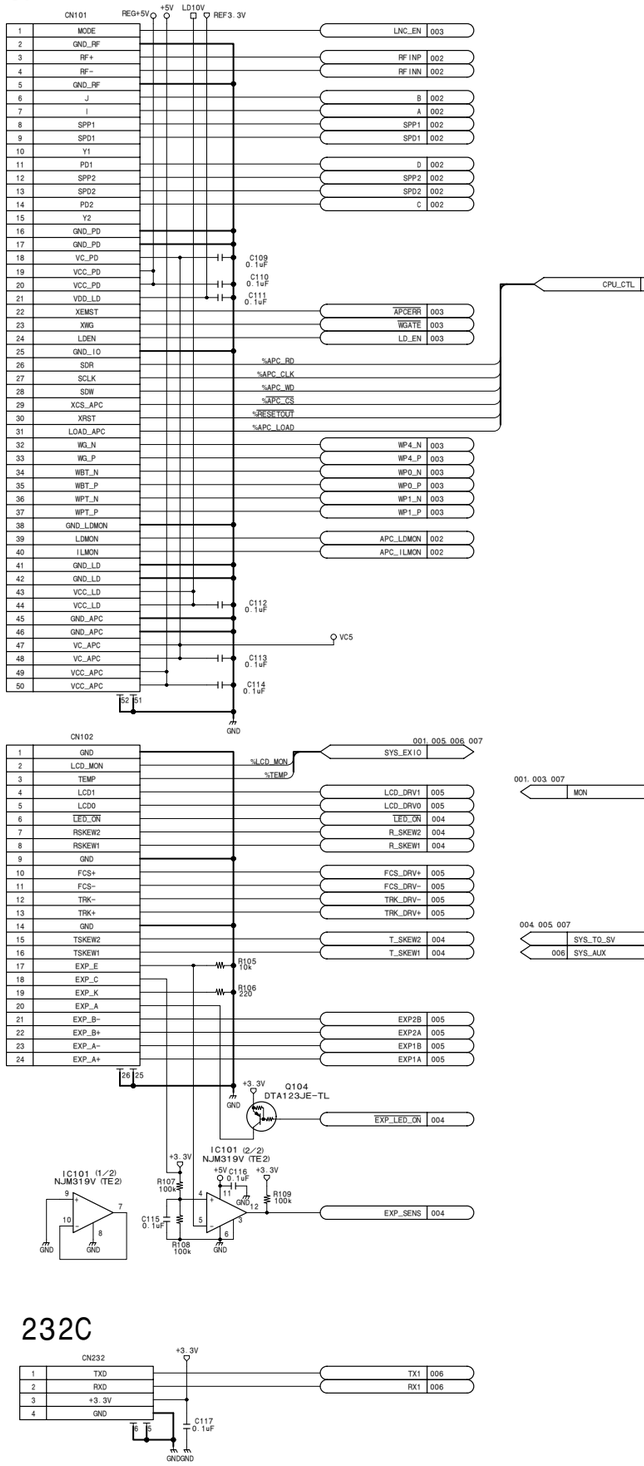

232C

ATAPI (ATA)

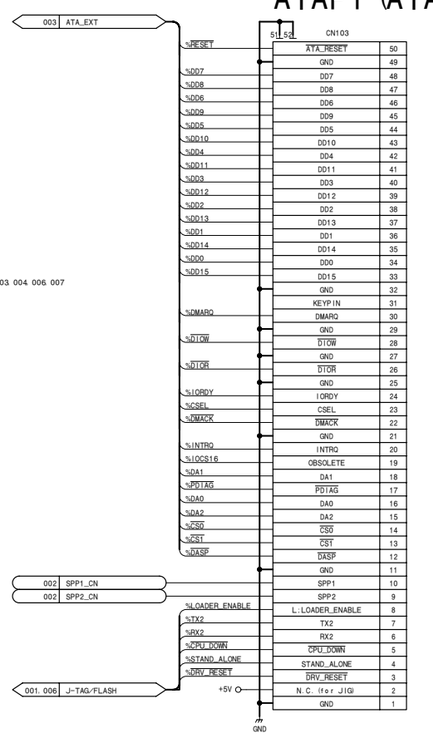

JIG (TP/LED)

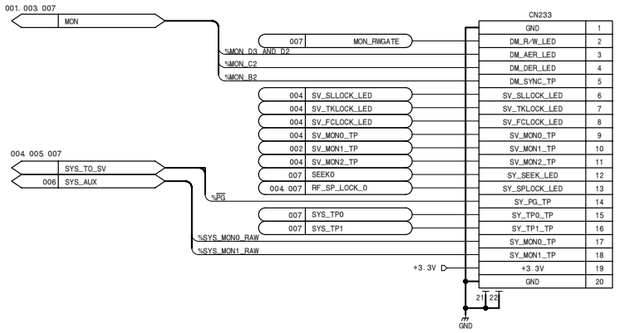

HN

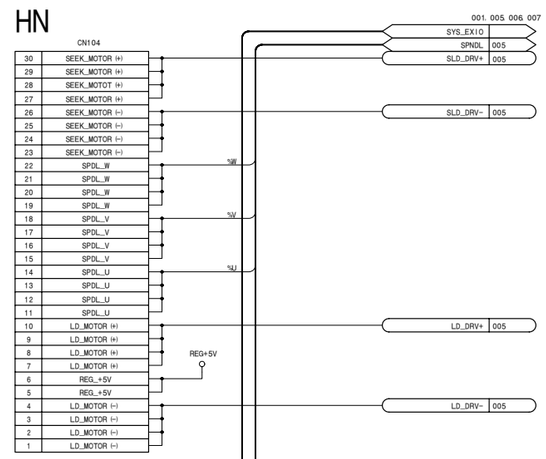

HN

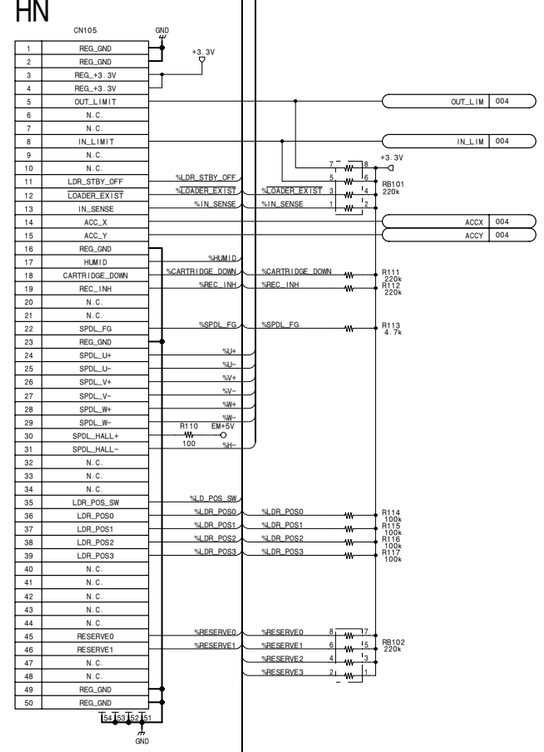

FAN



DR-550G (1/7)
BOARD NO. 1-865-835-21
BRD-P10_DR-550_012_1

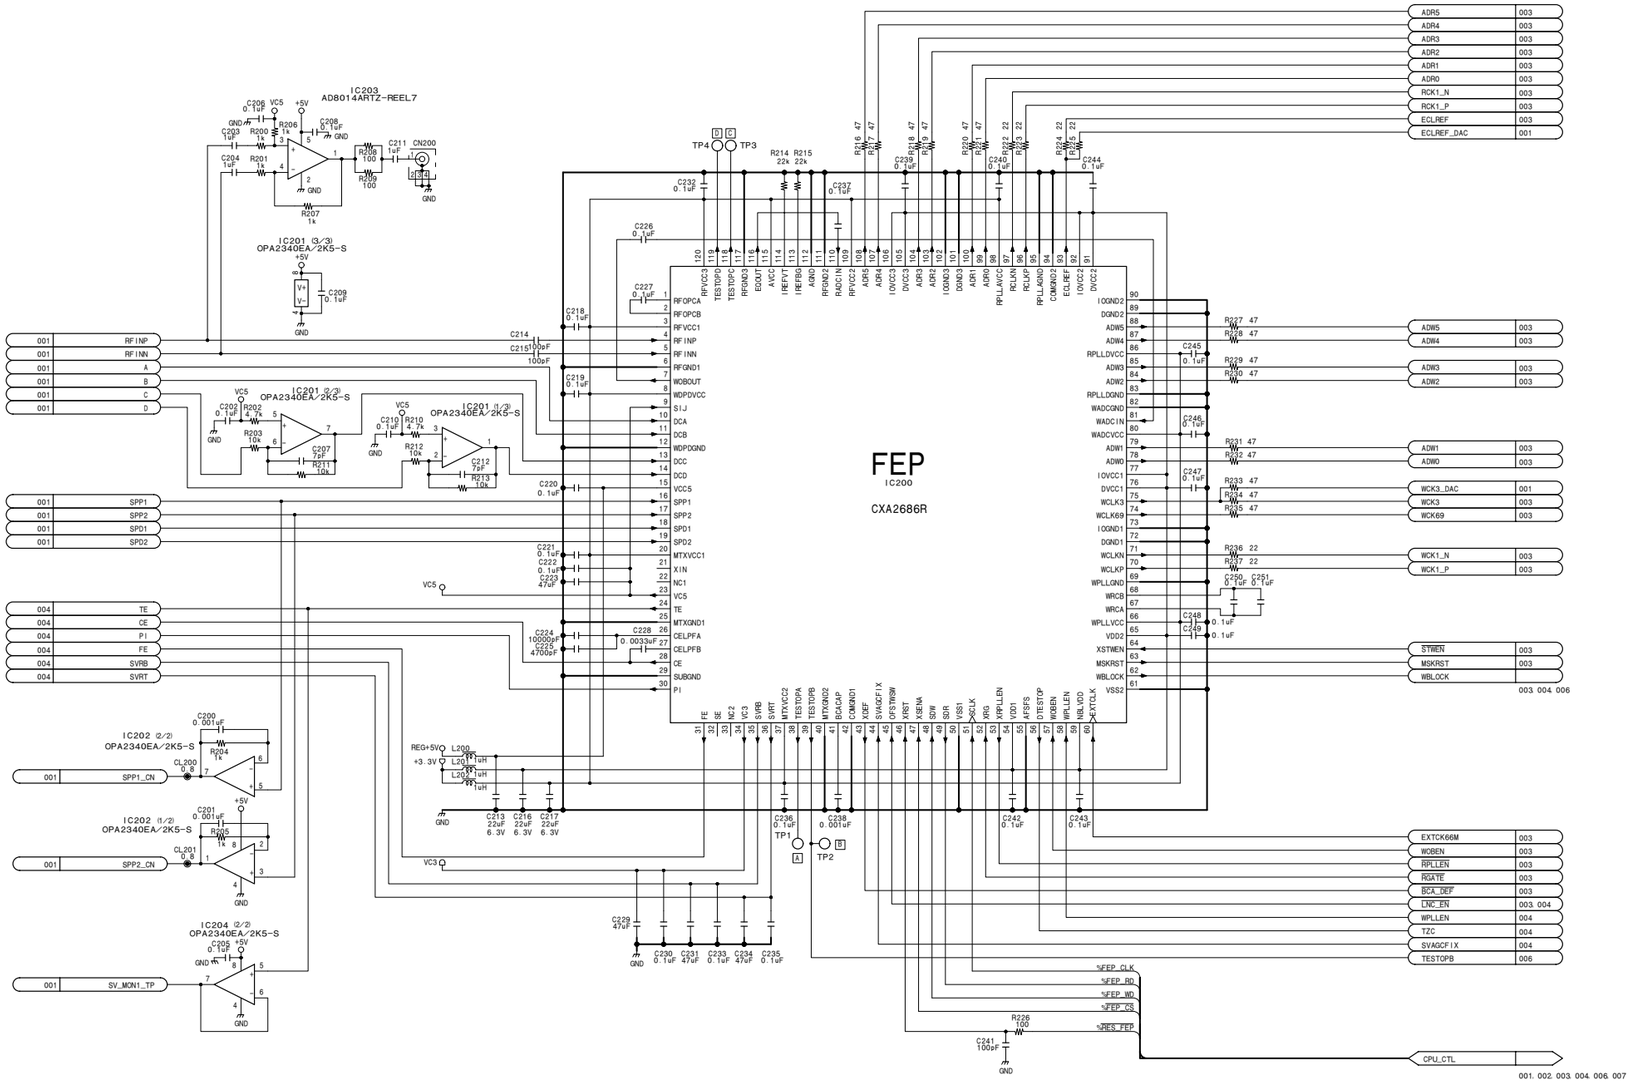

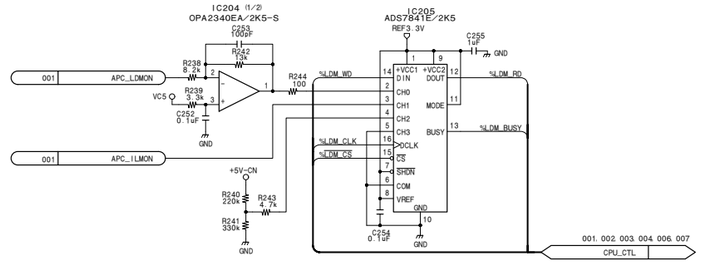

DR-550G (2/7)
BOARD NO. 1-865-835-21
BRD-P10_DR-550_012_2

PDW-F330/V2 (J,E)

BDC (Iguazu)

IC300
CXD9807AGG

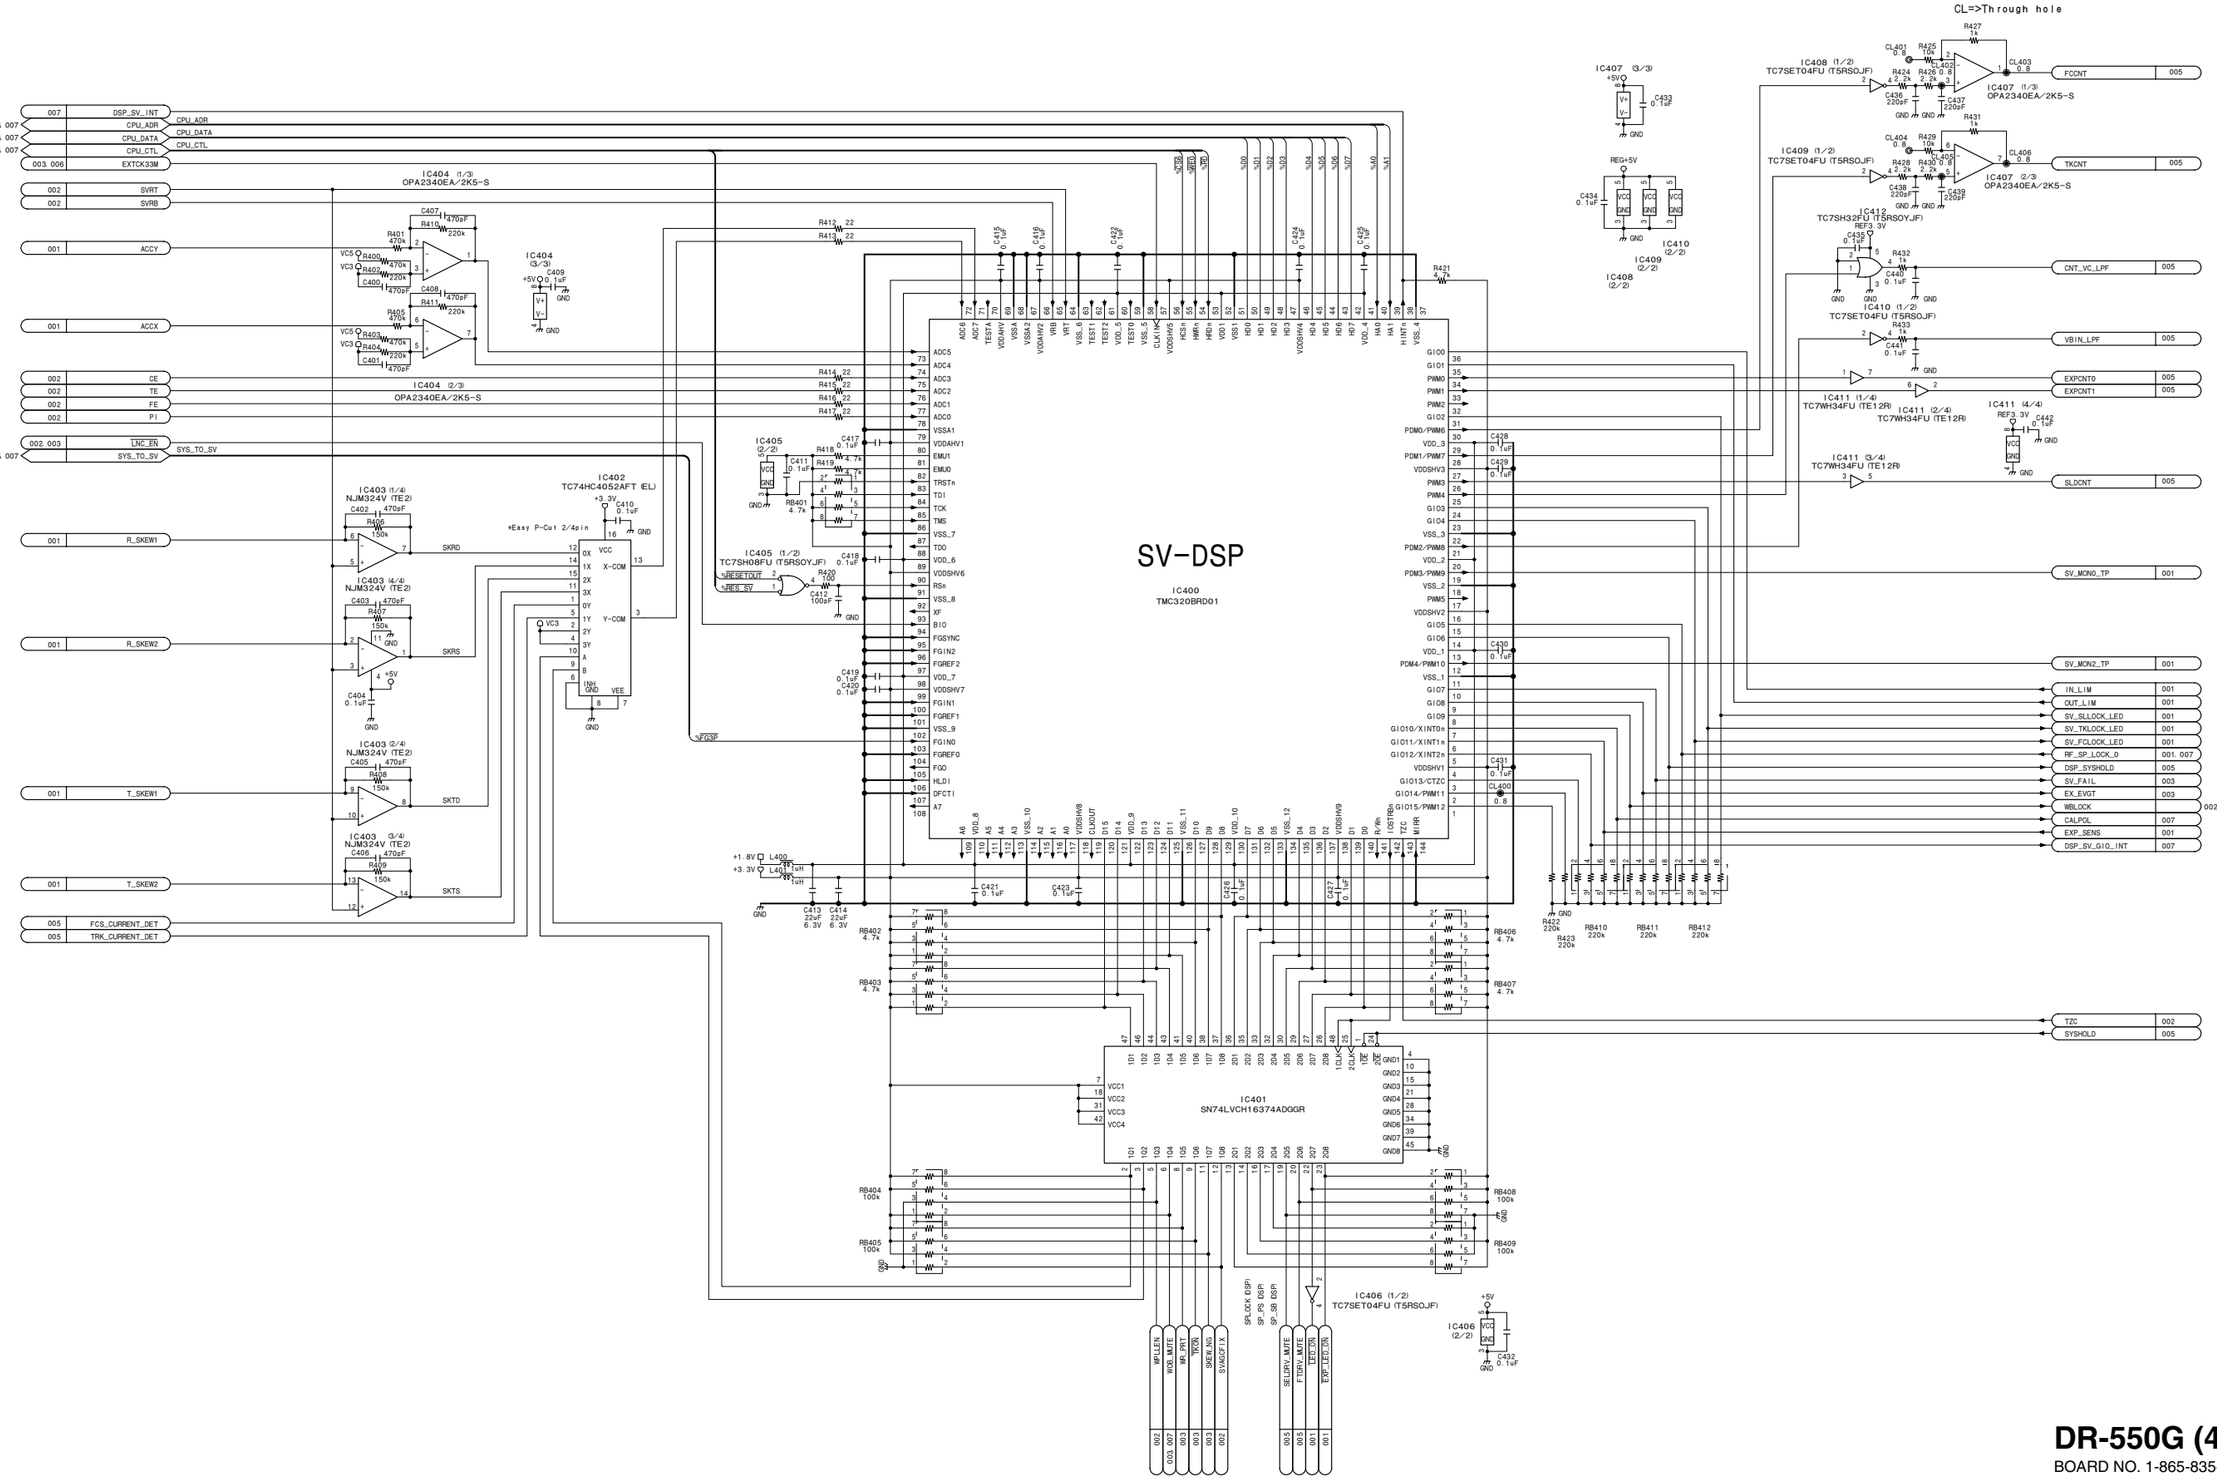

DR-550G (4/7)
BOARD NO. 1-865-835-21
BRD-P10_DR-550_012_4

PDW-F330/V2 (J,E)

DR-550G (5/7)
SUFFIX: -21

SPDL

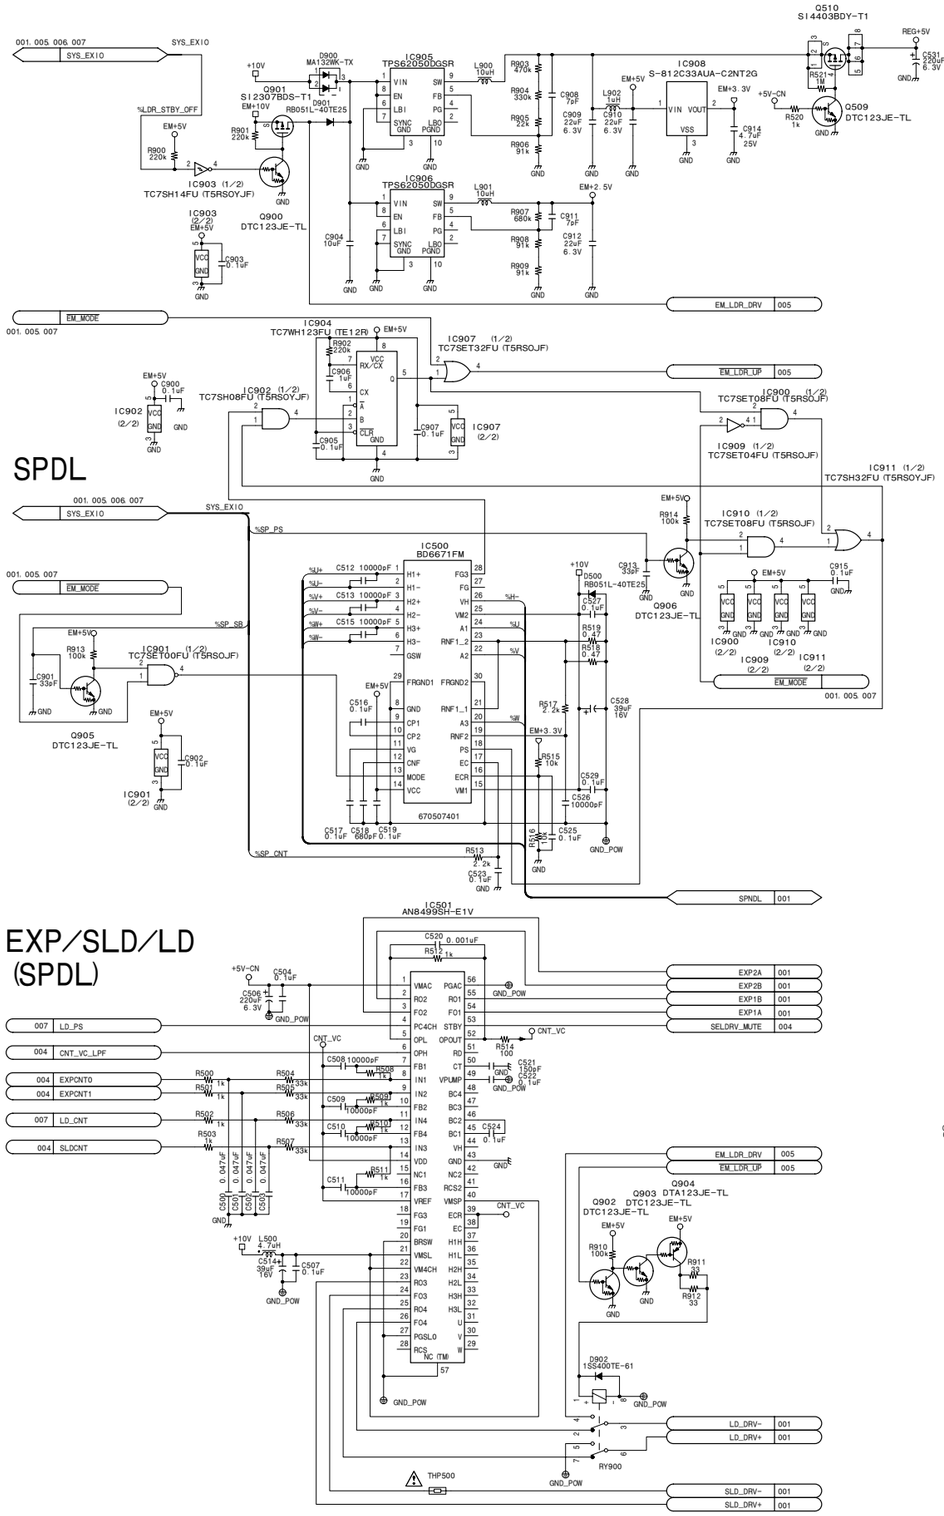



FCS/TRK

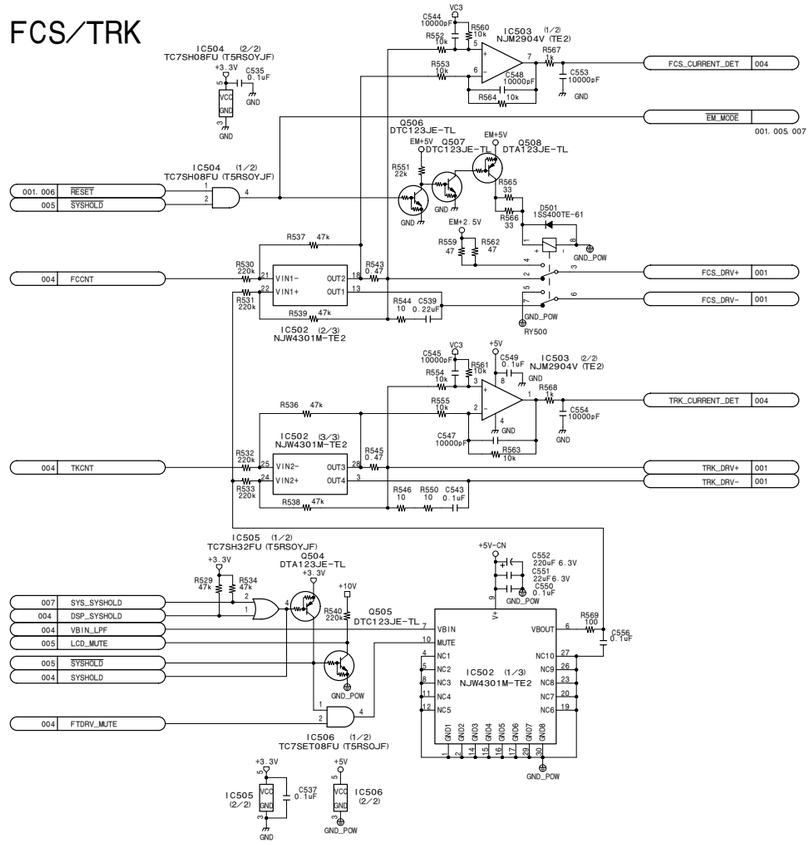

LCD

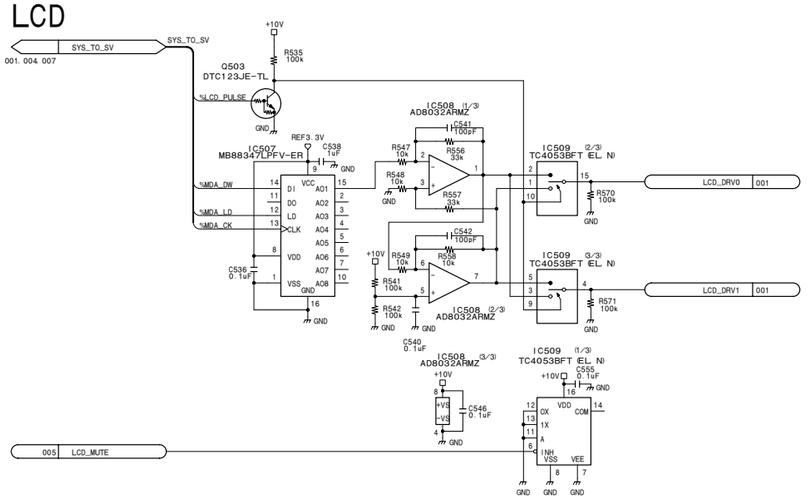

DR-550G (5/7)
BOARD NO. 1-865-835-21
BRD-P10_DR-550_012_5

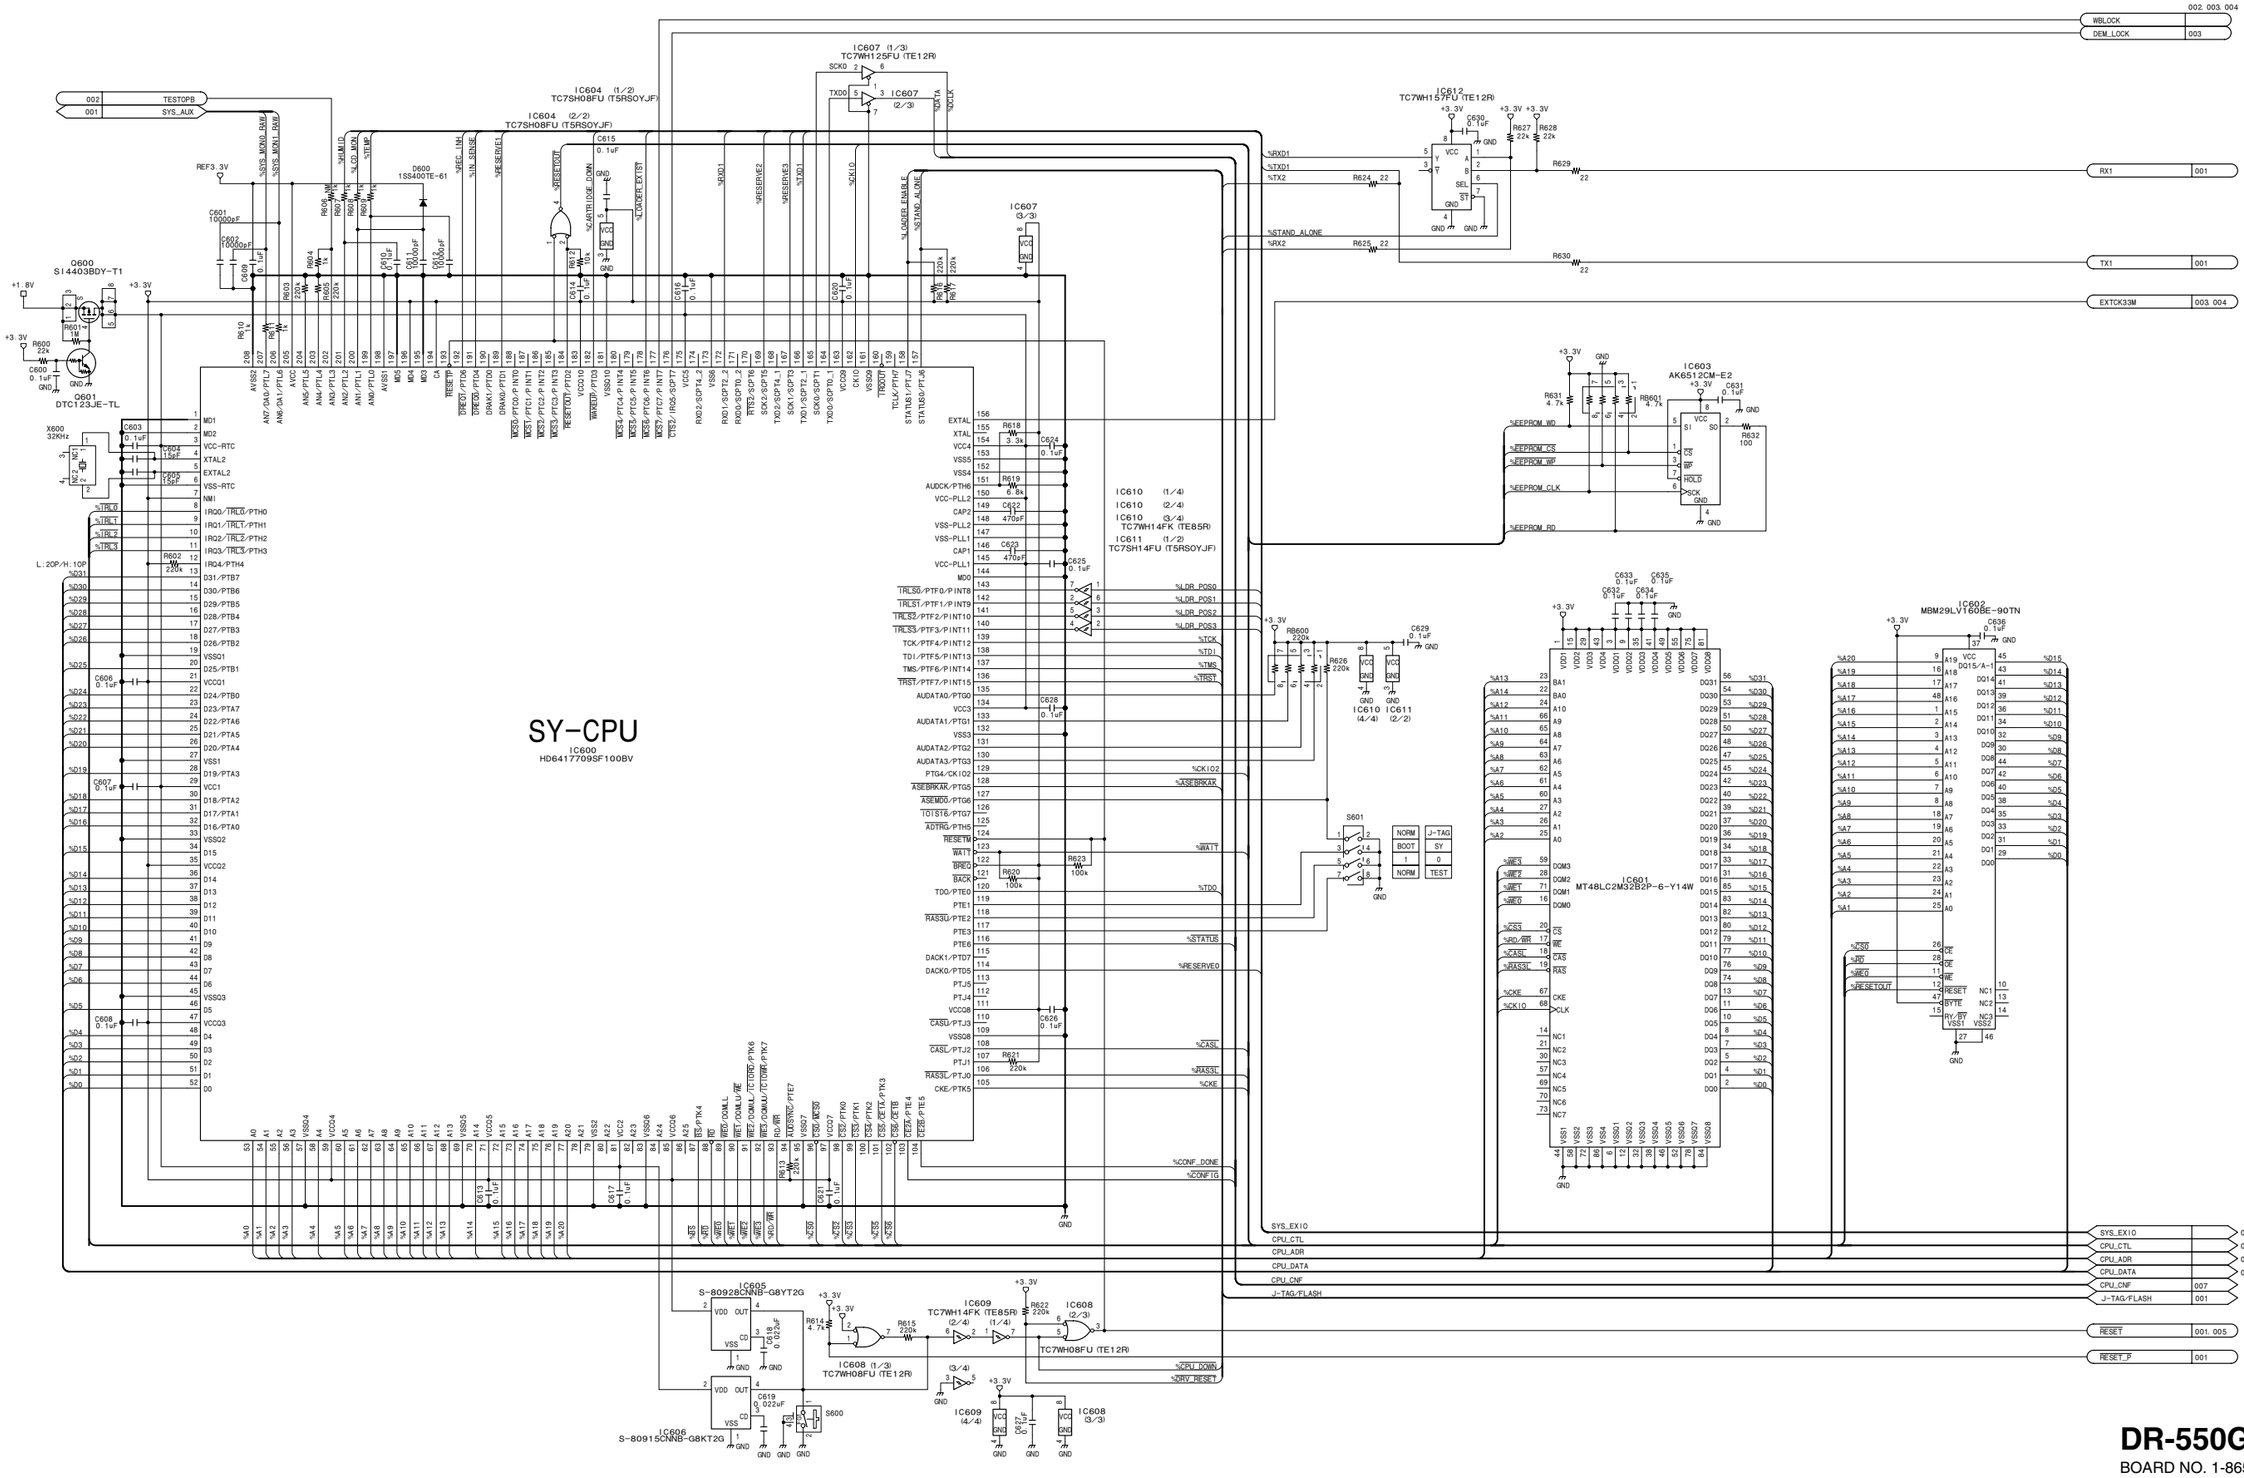

DR-550G (6/7)
BOARD NO. 1-865-835-21
BRD-P10_DR-550_012_6

PDW-F330/V2 (J,E)

SYS-PE

IC700 (1/2)
EP1C6F256C8N (300)

SYS-PE

IC700 (2/2)
EP1C6F256C8N (300)

DVP-29 (1/21)
SUFFIX: -11

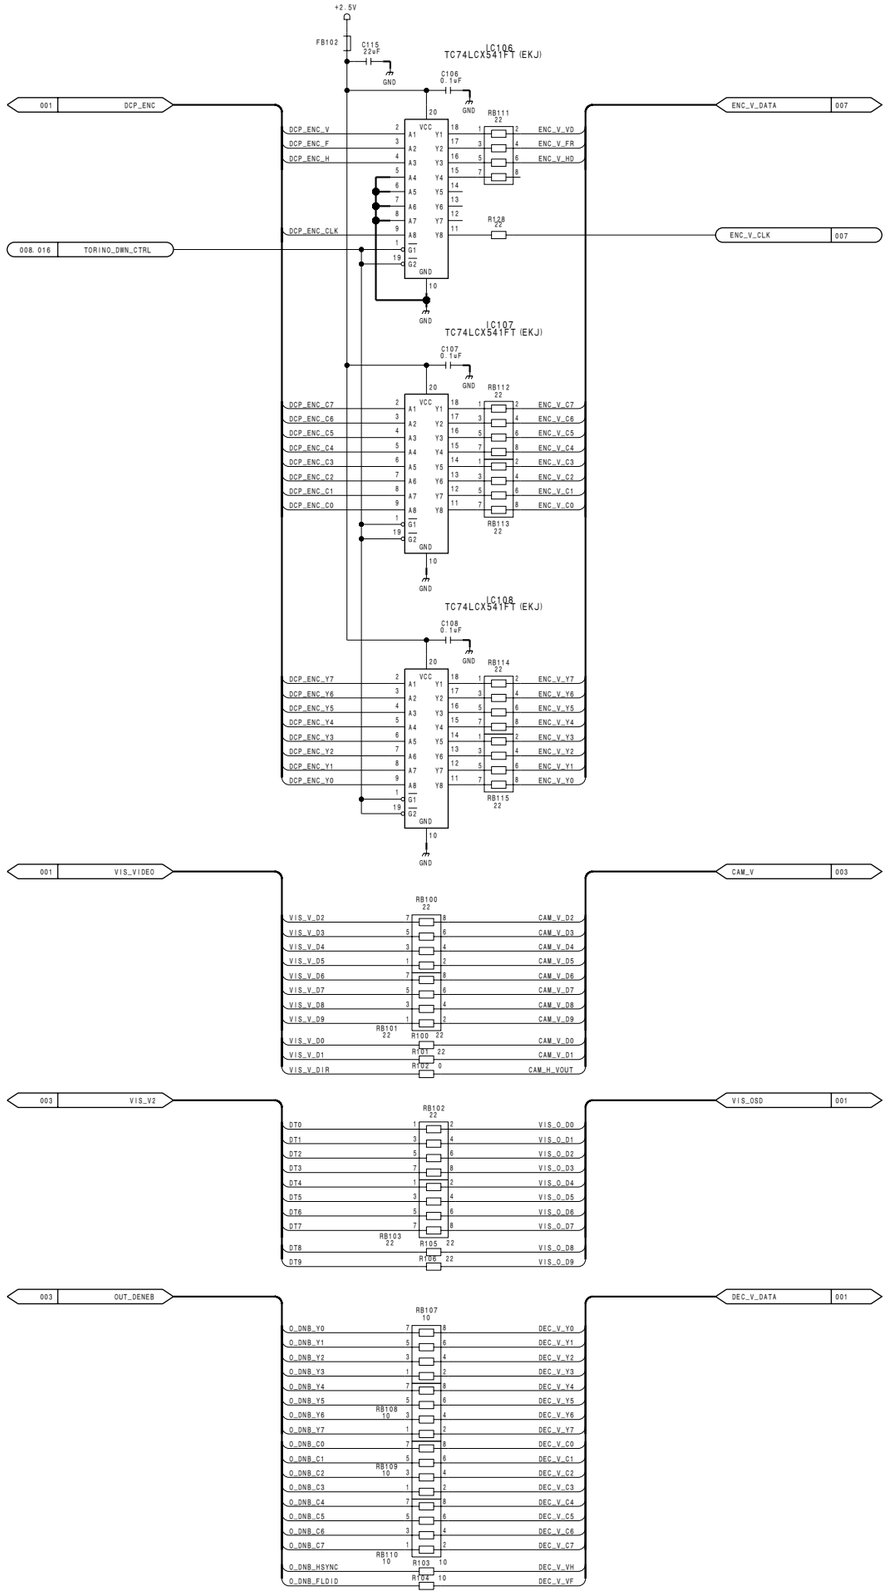

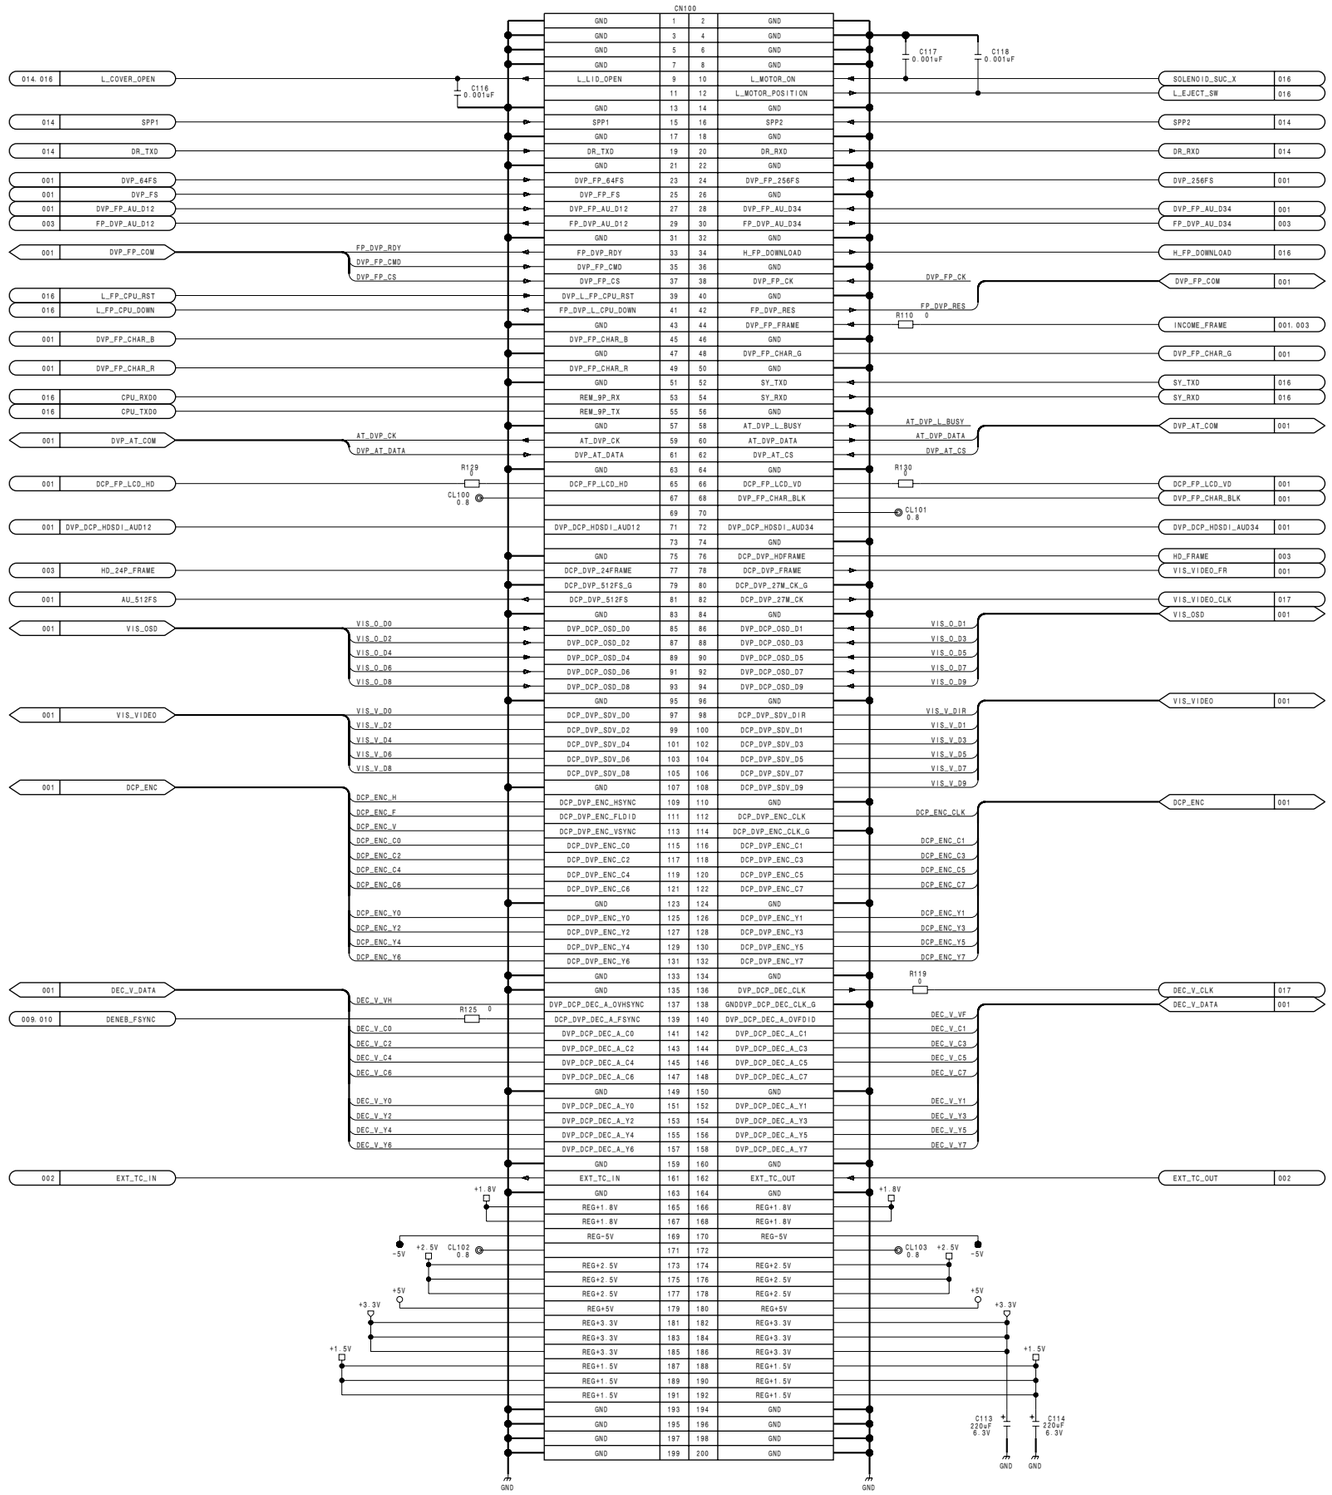

4-50

DVP-29 (1/21)
SUFFIX: -11

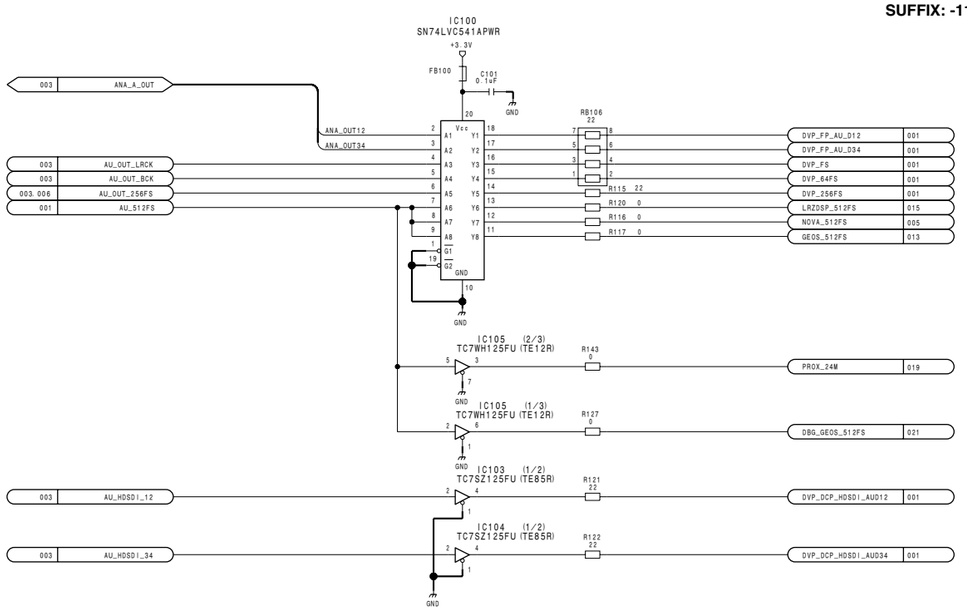

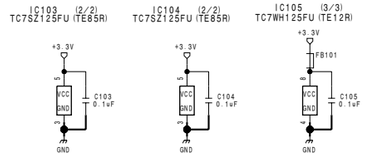

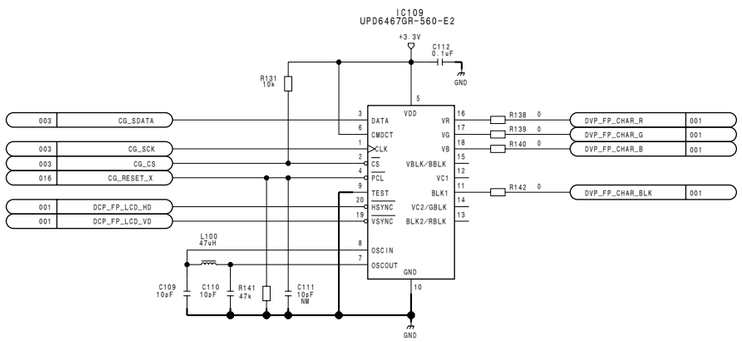

4-51

DVP-29 (1/21)
BOARD NO. 1-869-660-11
PDW-F350_DVP-29_11F_1

DVP-29 (2/21)
SUFFIX: -11

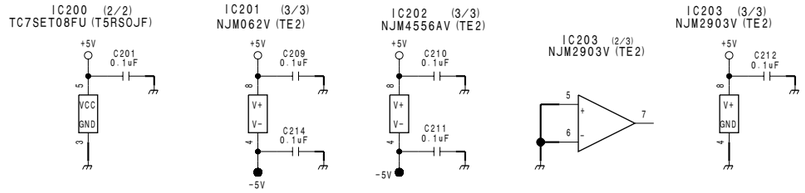

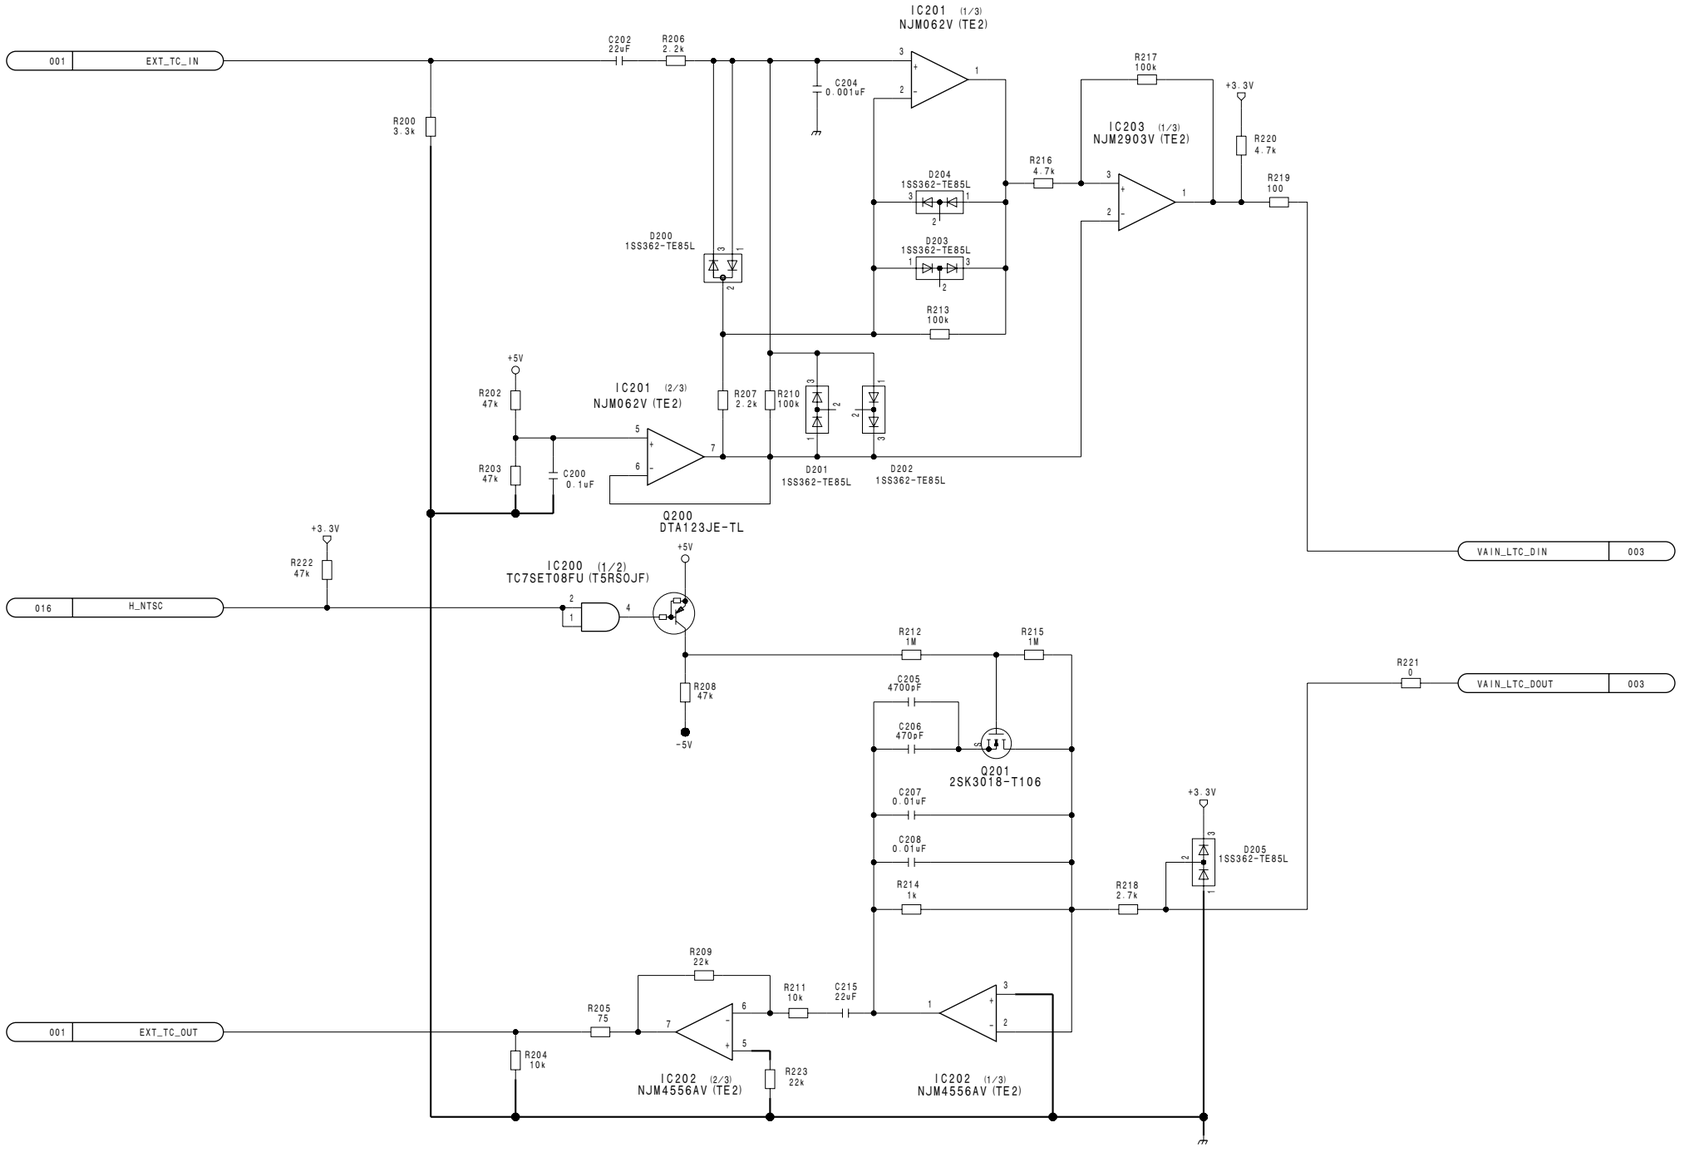

DVP-29 (2/21)
BOARD NO. 1-869-660-11
PDW-F350_DVP-29_11F_2

DVP-29 (3/21)
SUFFIX: -11

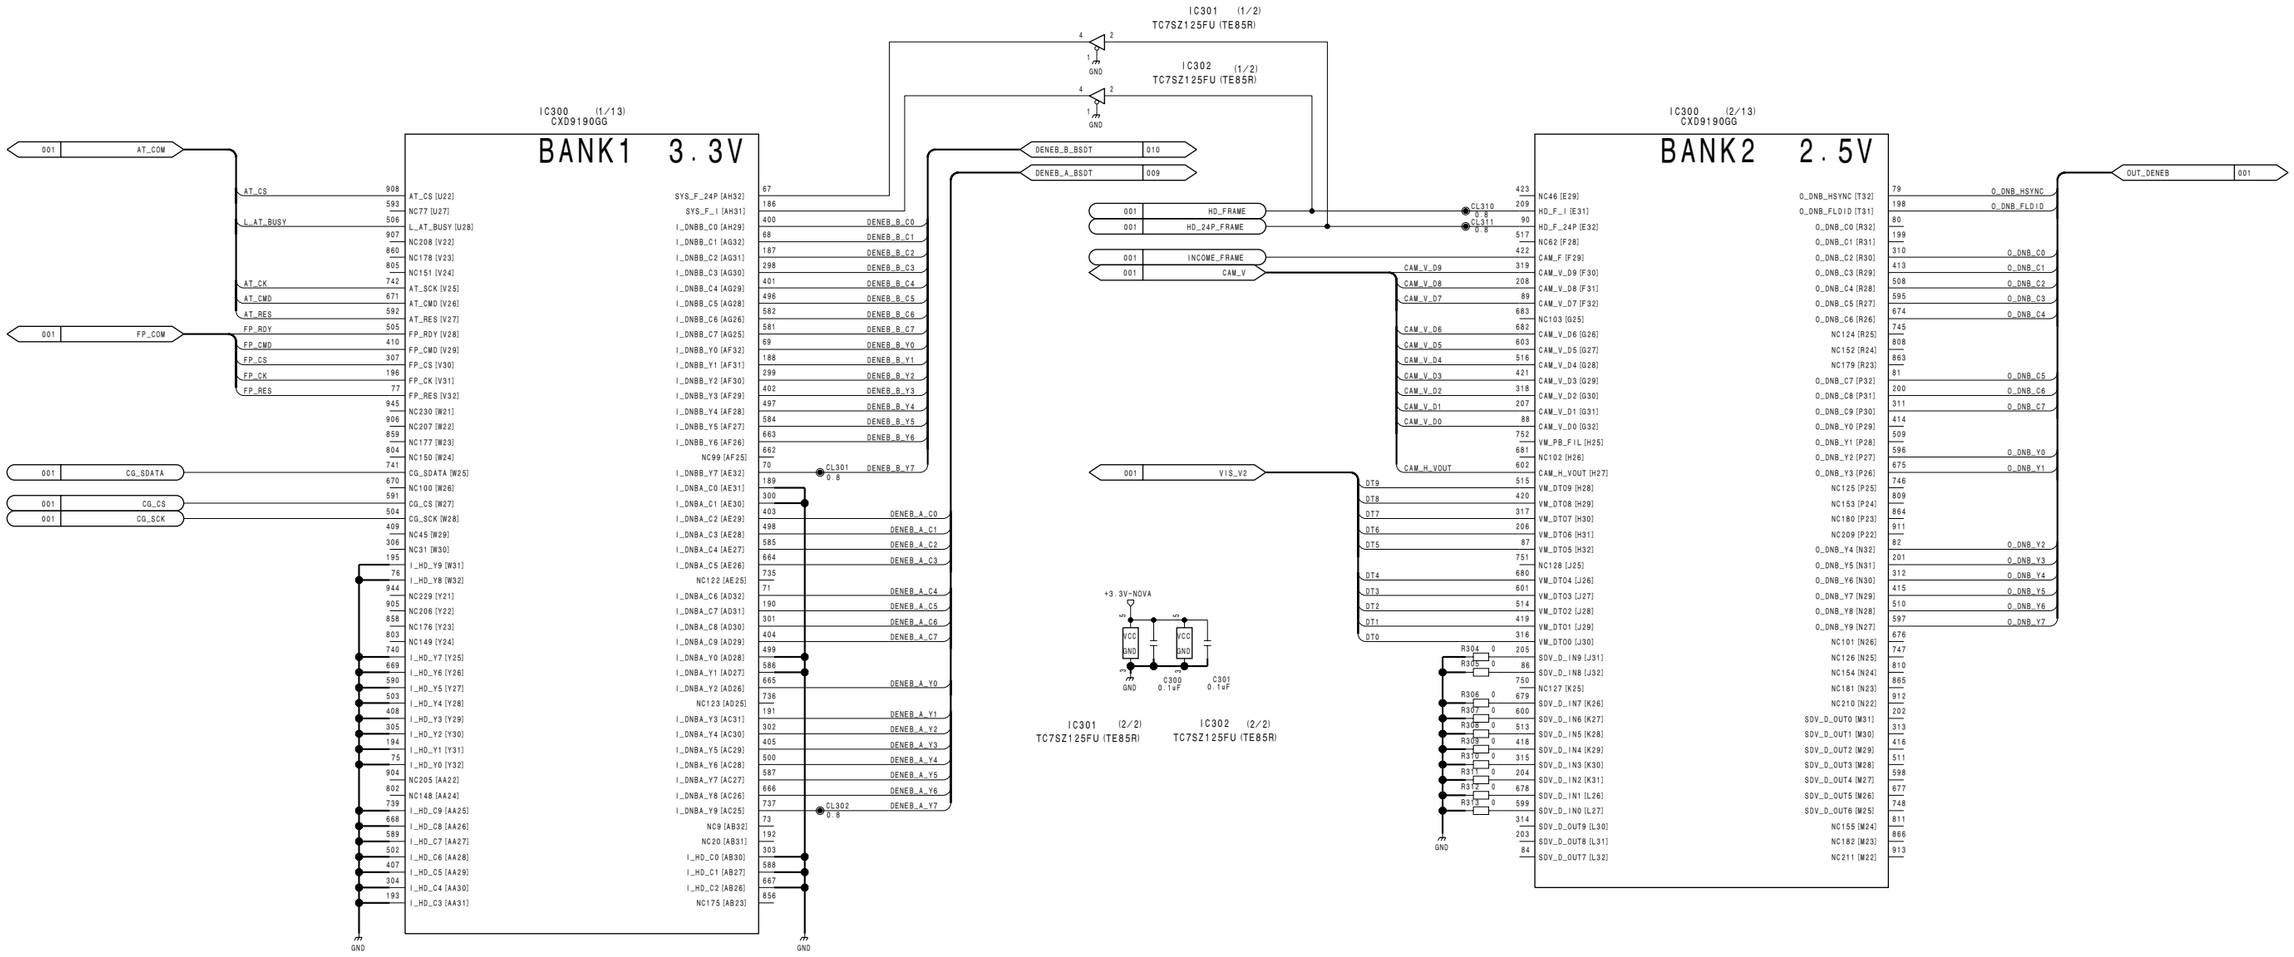

4-54

DVP-29 (3/21)
SUFFIX: -11

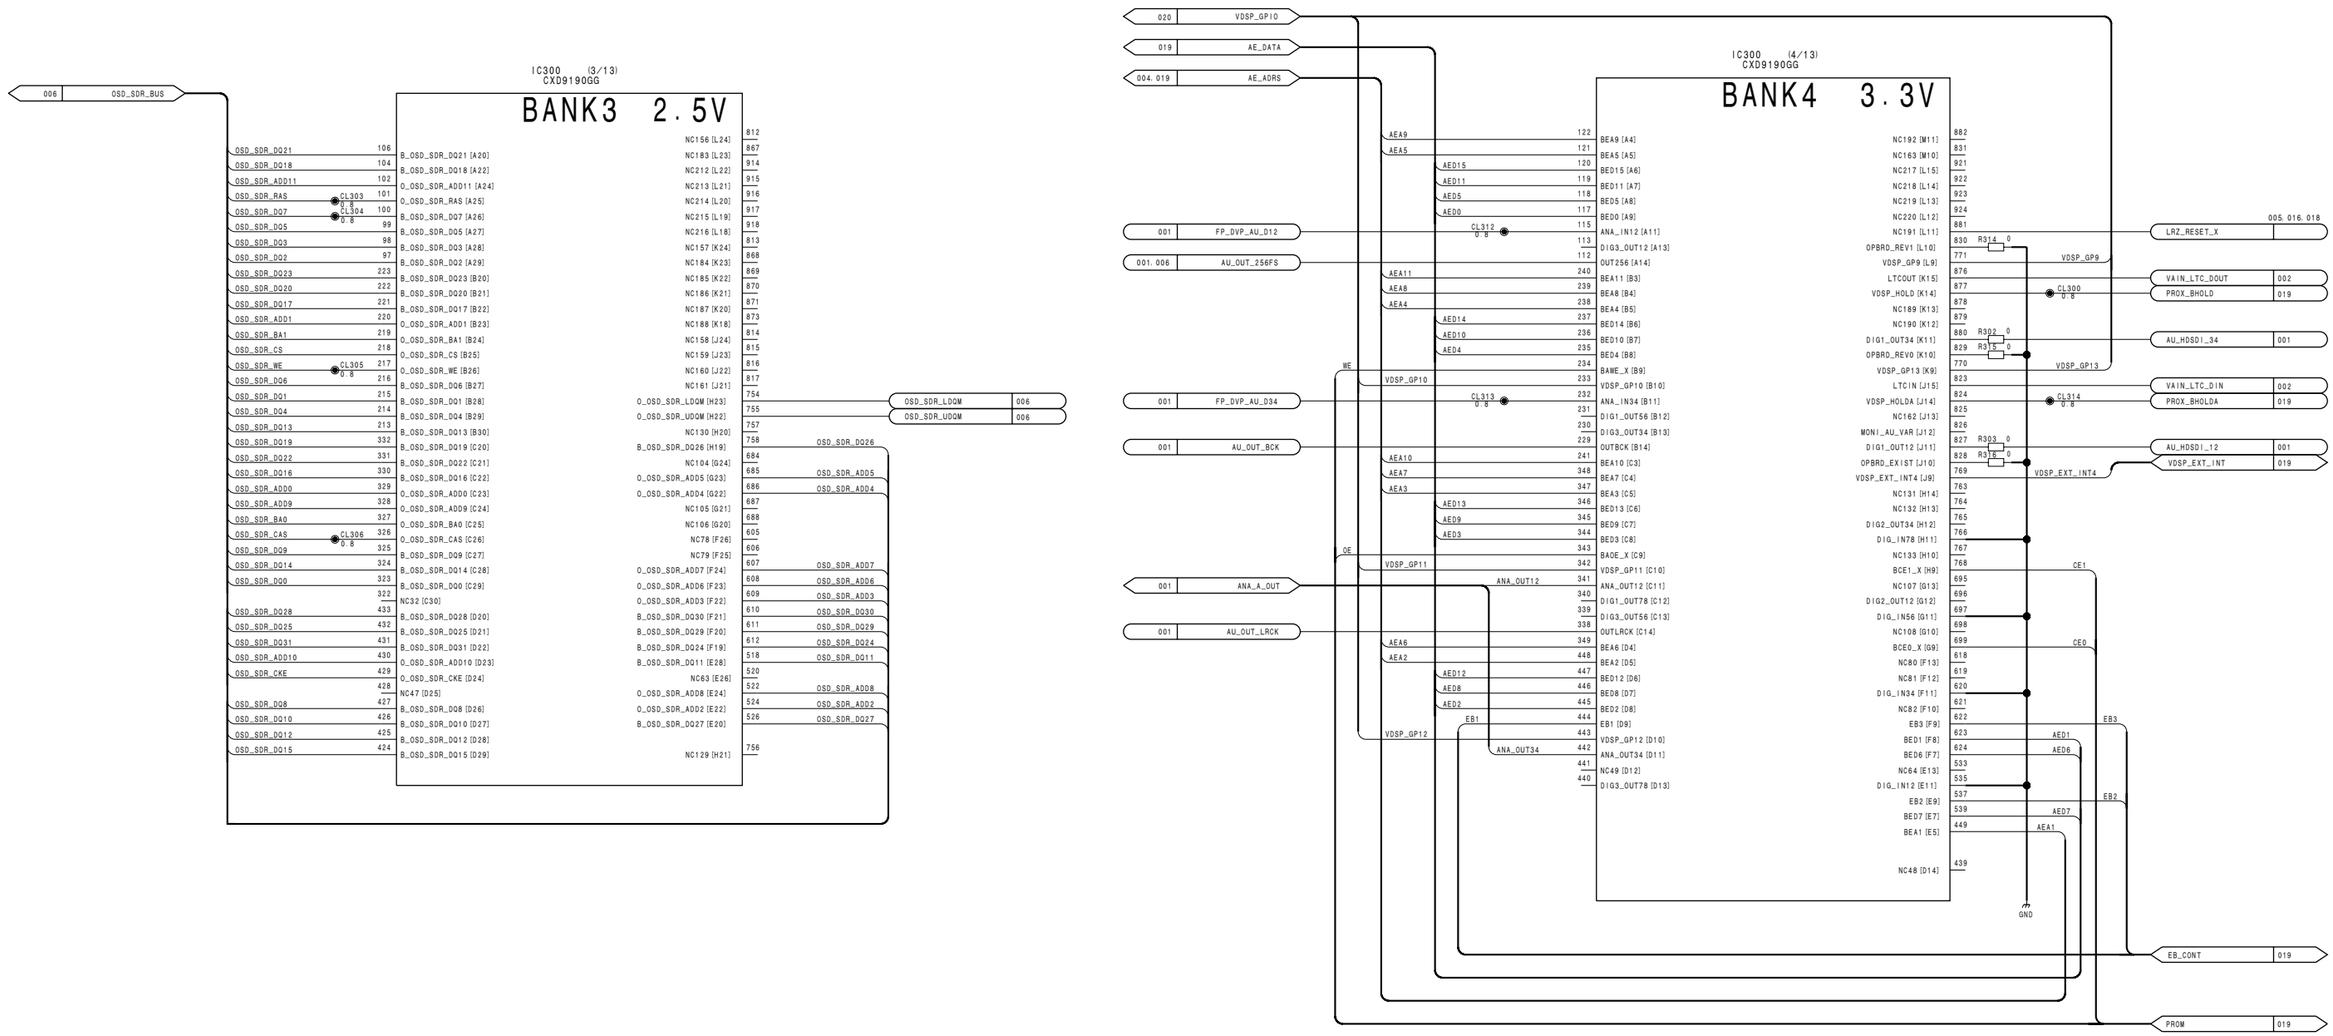

DVP-29 (4/21)
SUFFIX: -11

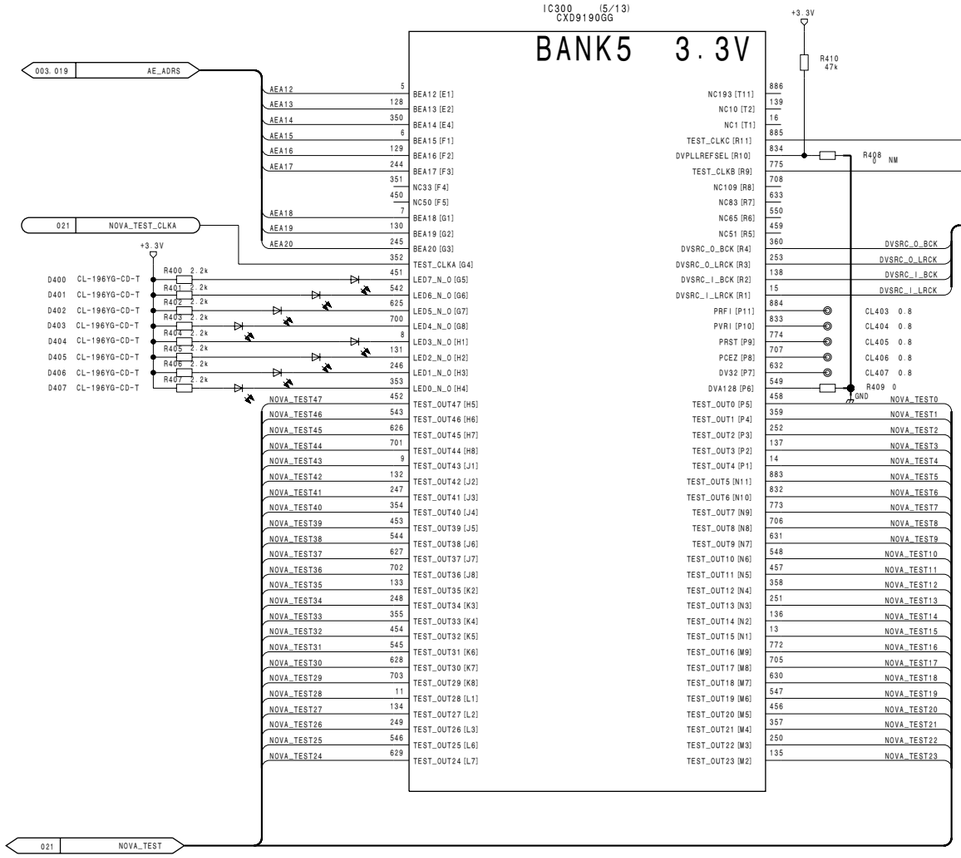

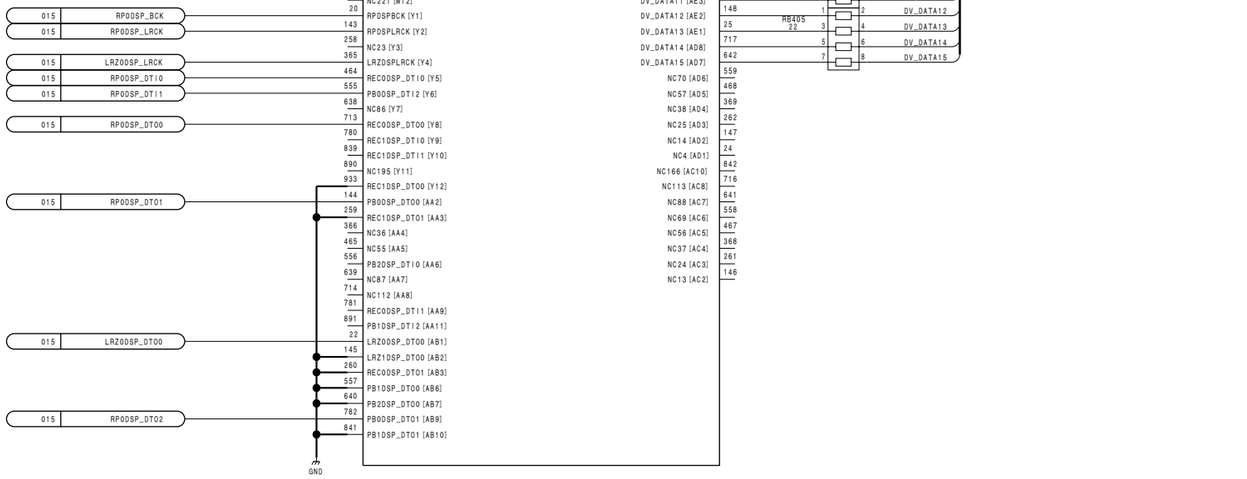

4-56

DVP-29 (4/21)
SUFFIX: -11

012 GEOS_NOVA_AUDIO
012 FPGA_HOST_BUS
012 LRZ_BS

IC300 (7/13)
CXD9190GG

BANK7 3.3V

	934	NC222 [AA12]		45	AU_PB_INFO
LRZ_BSEN_A	935	LRZ_BSEN_A [AA13]	PB_AU_INFO [AM14]	44	LRZ_BSRDY_B
	936	NC223 [AA14]	LRZ_BSRDY_B [AM13]	42	
	937	NC224 [AA15]	NC8 [AM11]	40	
	940	NC225 [AA18]	NC7 [AM9]	39	FPGA_HDATA3
	892	NC196 [AB11]	FPGA_HDATA3 [AM8]	38	FPGA_HDATA7
	893	NC197 [AB12]	FPGA_HDATA7 [AM7]	37	FPGA_HDATA12
LRZ_BSRDY_A	894	LRZ_BSRDY_A [AB13]	FPGA_HDATA12 [AM6]	36	
	895	NC198 [AB14]	NC6 [AM5]	35	
	896	NC199 [AB15]	NC5 [AM4]	166	AU_PB_DATA_D
FPGA_HDATA2	783	FPGA_HDATA2 [AC9]	PBD_AU_DATA [AL14]	165	LRZ_BSEN_B
	843	NC167 [AC11]	LRZ_BSEN_B [AL13]	164	LRZ_BS0_A
LRZ_BS7_A	844	LRZ_BS7 [AC12]	LRZ_BS0 [AL12]	163	
	845	NC168 [AC13]	NC19 [AL11]	162	
	846	NC169 [AC14]	NC18 [AL10]	161	VAIN_INTS_X
NETP_AU_DATA	847	NETP_AU_DATA [AC15]	NOVA_INTS_X [AL9]	160	FPGA_HDATA4
AU_PB_SF_LRCK	850	PB_AU_SF_FS [AC18]	FPGA_HDATA4 [AL8]	159	FPGA_HDATA8
FPGA_HDATA1	784	FPGA_HDATA1 [AD9]	FPGA_HDATA8 [AL7]	158	FPGA_HDATA13
	785	NC136 [AD10]	FPGA_HDATA13 [AL6]	157	
	786	NC137 [AD11]	NC17 [AL5]	156	
LRZ_BS6_A	787	LRZ_BS6 [AD12]	NC16 [AL4]	155	
	788	NC138 [AD13]	NC15 [AL3]	279	AU_PB_DATA_C
AU_REC_DATA	789	REC_AU_DATA [AD14]	PBC_AU_DATA [AK14]	278	
AU_REC_SF_LRCK	790	REC_AU_SF_FS [AD15]	NC30 [AK13]	277	LRZ_BS1_A
FPGA_HDATA0	719	FPGA_HDATA0 [AE9]	LRZ_BS1 [AK12]	276	
	720	NC114 [AE10]	NC29 [AK11]	275	PROX_GOP_FLG
	721	NC115 [AE11]	LRZ_AUX2 [AK10]	274	VAIN_HBUSY
LRZ_BS5_A	722	LRZ_BS5 [AE12]	NOVA_AUX1 [AK9]	273	FPGA_HDATA5
	723	NC116 [AE13]	FPGA_HDATA5 [AK8]	272	FPGA_HDATA9
NETR_AU_DATA12	724	NETR_AU_DATA12 [AE14]	FPGA_HDATA9 [AK7]	271	FPGA_HDATA14
VAIN_HCS_X	646	NOVA_HCS_X [AF9]	FPGA_HDATA14 [AK6]	270	
	647	NC91 [AF10]	NC28 [AK5]	269	
	648	NC92 [AF11]	NC27 [AK4]	268	
LRZ_BS4_A	649	LRZ_BS4 [AF12]	NC26 [AK3]	383	
	650	NC93 [AF13]	NC43 [AJ13]	382	LRZ_BS2_A
VAIN_HWR_X	565	NOVA_HWR_X [AG9]	LRZ_BS2 [AJ12]	381	
	566	NC71 [AG10]	NC42 [AJ11]	380	
	567	NC72 [AG11]	NC41 [AJ10]	379	VAIN_HSTRB_X
LRZ_BS3_A	568	LRZ_BS3 [AG12]	NOVA_AUX0 [AJ9]	378	FPGA_HDATA6
	569	NC73 [AG13]	FPGA_HDATA6 [AJ8]	377	FPGA_HDATA10
AU_PB_DATA_A	570	PBA_AU_DATA [AG14]	FPGA_HDATA10 [AJ7]	376	FPGA_HDATA15
	472	NC58 [AH5]	FPGA_HDATA15 [AJ6]	375	
FPGA_HDATA11	474	FPGA_HDATA11 [AH7]	NC40 [AJ5]	374	
VAIN_HRD_X	476	NOVA_HRD_X [AH9]	NC39 [AJ4]		
	478	NC59 [AH11]			
	480	NC60 [AH13]			
			NC200 [AB18]	899	
			NC139 [AD18]	793	
			INIT_DONE [AE15]	725	CL402 0.8
			NETR_AU_DATA34 [AF14]	651	NETR_AU_DATA34
			PBB_AU_DATA [AH14]	481	AU_PB_DATA_B

IC300 (8/13)
CXD9190GG

BANK8 2.5V

	943	NC228 [AA21]		60	SDR_DT11
	900	NC201 [AB19]	NOVA_SDR_DT11 [AM29]	59	SDR_DT10
	901	NC202 [AB20]	NOVA_SDR_DT10 [AM28]	58	SDR_DT8
	902	NC203 [AB21]	NOVA_SDR_DT8 [AM27]	57	SDR_CLKE
	903	NC204 [AB22]	NOVA_SDR_CLKE [AM26]	56	SDR_ADR9
	801	NC147 [AB24]	NOVA_SDR_ADR9 [AM25]	55	SDR_ADR7
	852	NC171 [AC20]	NOVA_SDR_ADR7 [AM24]	53	SDR_DT31
	853	NC172 [AC21]	NOVA_SDR_DT31 [AM22]	51	SDR_DT27
	854	NC173 [AC22]	NOVA_SDR_DT27 [AM20]	182	SDR_DT13
	855	NC174 [AC23]	NOVA_SDR_DT13 [AL30]	181	SDR_DT4
	800	NC146 [AC24]	NOVA_SDR_DT4 [AL29]	180	SDR_DT12
	794	NC140 [AD19]	NOVA_SDR_DT12 [AL28]	179	SDR_DT9
	795	NC141 [AD20]	NOVA_SDR_DT9 [AL27]	178	CL416 0.8 SDR_CAS
	796	NC142 [AD21]	NOVA_SDR_CAS [AL26]	177	SDR_BA0
	797	NC143 [AD22]	NOVA_SDR_BA0 [AL25]	176	SDR_ADR8
	798	NC144 [AD23]	NOVA_SDR_ADR8 [AL24]	175	SDR_ADR3
	799	NC145 [AD24]	NOVA_SDR_ADR3 [AL23]	174	SDR_DT16
	730	NC117 [AE20]	NOVA_SDR_DT16 [AL22]	173	SDR_DT29
	731	NC118 [AE21]	NOVA_SDR_DT29 [AL21]	172	SDR_DT25
	732	NC119 [AE22]	NOVA_SDR_DT25 [AL20]	295	SDR_DT15
	733	NC120 [AE23]	NOVA_SDR_DT15 [AK30]	294	SDR_DT0
	734	NC121 [AE24]	NOVA_SDR_DT0 [AK29]	293	SDR_DT14
	657	NC94 [AF20]	NOVA_SDR_DT14 [AK28]	292	SDR_DT6
	658	NC95 [AF21]	NOVA_SDR_DT6 [AK27]	291	CL414 0.8 SDR_WE
	659	NC96 [AF22]	NOVA_SDR_WE [AK26]	290	SDR_CS0
	660	NC97 [AF23]	NOVA_SDR_CS [AK25]	289	SDR_BA1
	661	NC98 [AF24]	NOVA_SDR_BA1 [AK24]	288	SDR_ADR2
SDR_DT21	576	NOVA_SDR_DT21 [AG20]	NOVA_SDR_ADR2 [AK23]	287	SDR_ADR10
SDR_DT18	577	NOVA_SDR_DT18 [AG21]	NOVA_SDR_ADR10 [AK22]	286	SDR_DT30
	578	NC75 [AG22]	NOVA_SDR_DT30 [AK21]	285	SDR_DT22
	579	NC76 [AG23]	NOVA_SDR_DT22 [AK20]	283	SDR_DT26
SDR_ADR5	580	NOVA_SDR_ADR5 [AG24]	NOVA_SDR_DT26 [AK18]		
SDR_DT23	485	NOVA_SDR_DT23 [AH18]			
SDR_DT28	486	NOVA_SDR_DT28 [AH19]			
SDR_DT19	487	NOVA_SDR_DT19 [AH20]			
SDR_ADR1	489	NOVA_SDR_ADR1 [AH22]			
SDR_ADR4	491	NOVA_SDR_ADR4 [AH24]			
	493	NC61 [AH26]			
SDR_DT3	495	NOVA_SDR_DT3 [AH28]			
SDR_DT24	388	NOVA_SDR_DT24 [AJ18]			
SDR_DT20	390	NOVA_SDR_DT20 [AJ20]			
SDR_DT17	391	NOVA_SDR_DT17 [AJ21]	NC226 [AA19]	941	
SDR_ADR0	392	NOVA_SDR_ADR0 [AJ22]	NC227 [AA20]	942	
SDR_ADR6	393	NOVA_SDR_ADR6 [AJ23]	NC170 [AC19]	851	
	394	NC44 [AJ24]	NC74 [AG19]	575	
SDR_RAS	CL415 0.8 395	NOVA_SDR_RAS [AJ25]			
SDR_DT7	CL413 0.8 396	NOVA_SDR_DT7 [AJ26]			
SDR_DT5	397	NOVA_SDR_DT5 [AJ27]			
SDR_DT1	398	NOVA_SDR_DT1 [AJ28]			
SDR_DT2	399	NOVA_SDR_DT2 [AJ29]			

006 NOVA_SDR_BUS

1 2 3 4 5

DVP-29 (5/21)
SUFFIX: -11

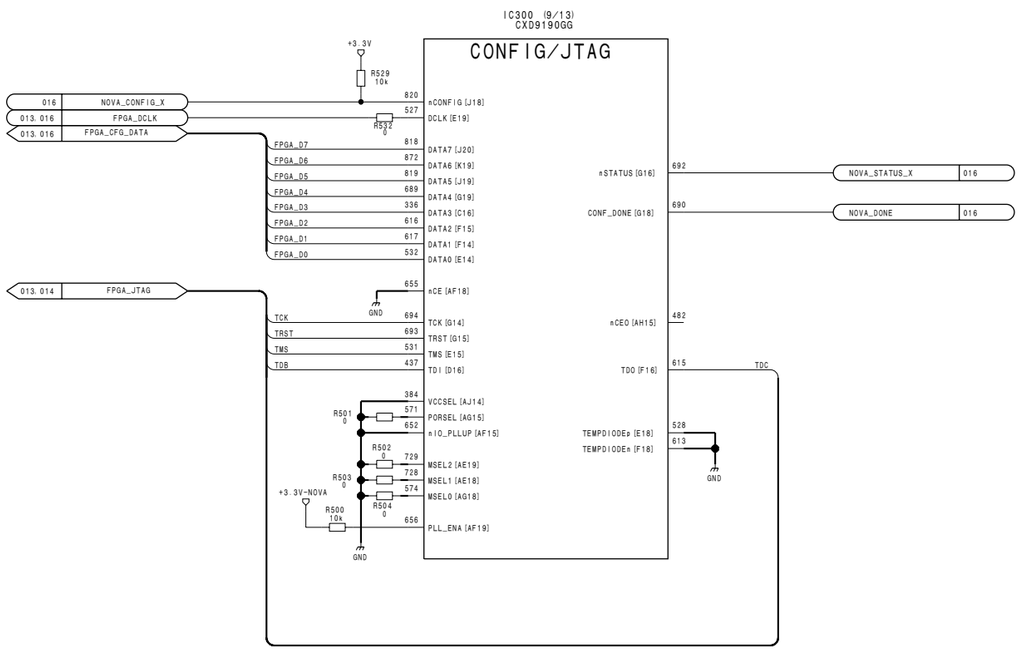

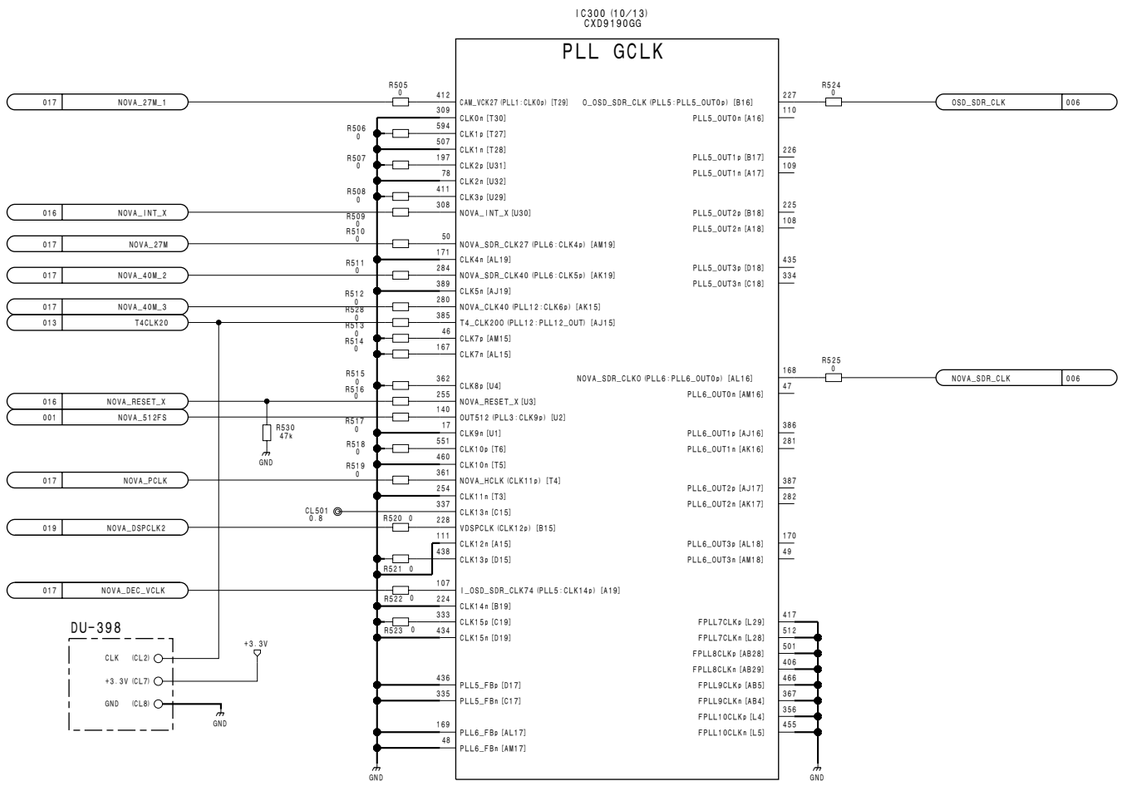

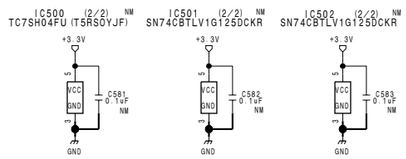

4-58

DVP-29 (5/21) **SUFFIX: -11**

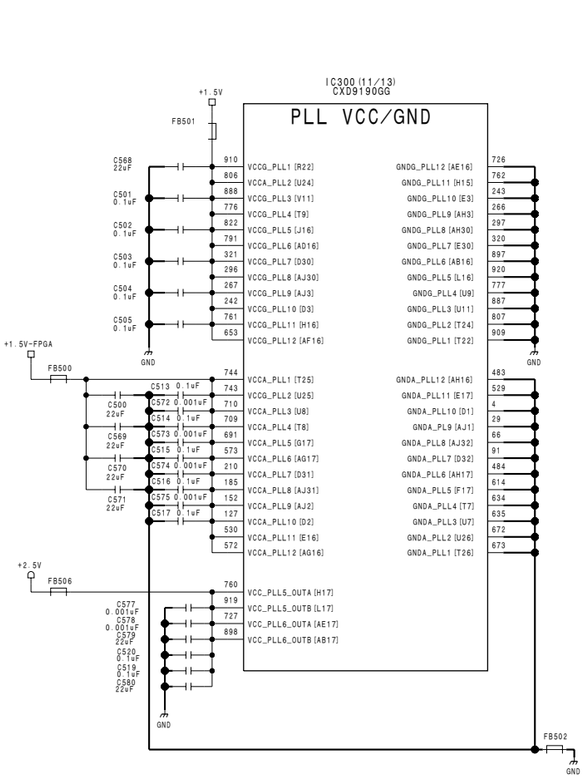

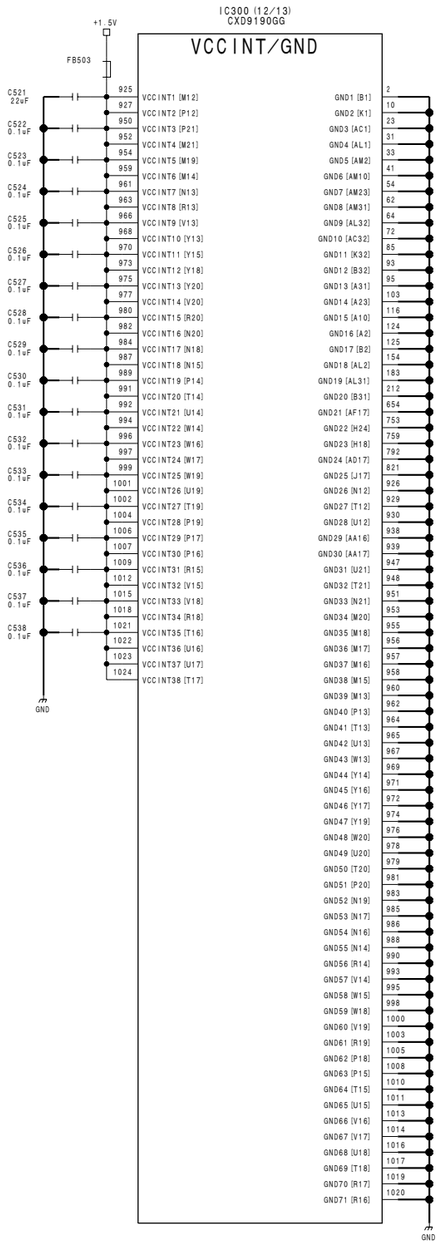

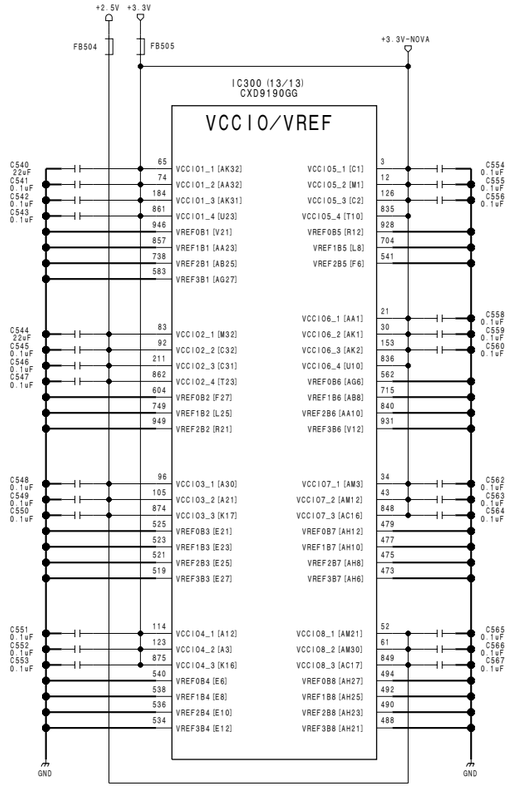

DVP-29 (5/21)
BOARD NO. 1-869-660-11
PDW-F350_DVP-29_11F_5

DVP-29 (6/21)
SUFFIX: -11

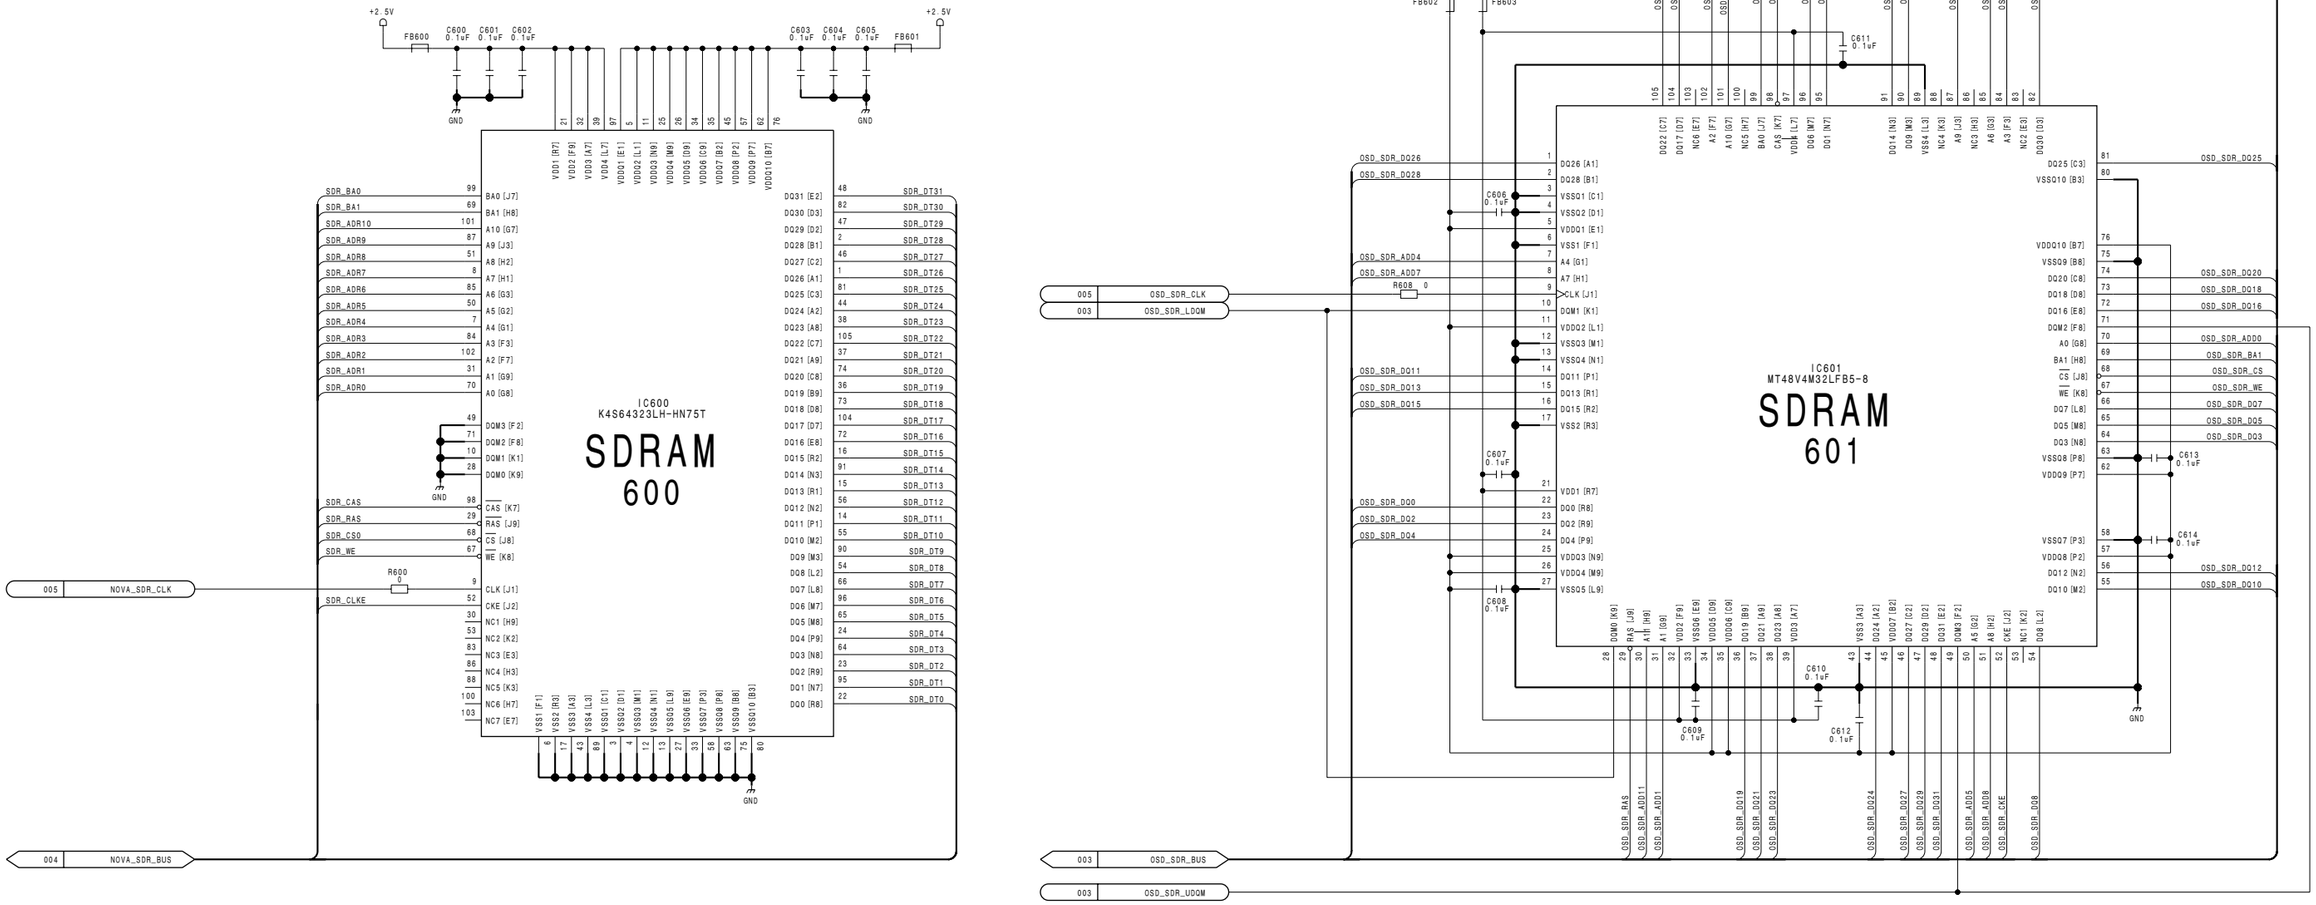

4-60

DVP-29 (6/21)
SUFFIX: -11

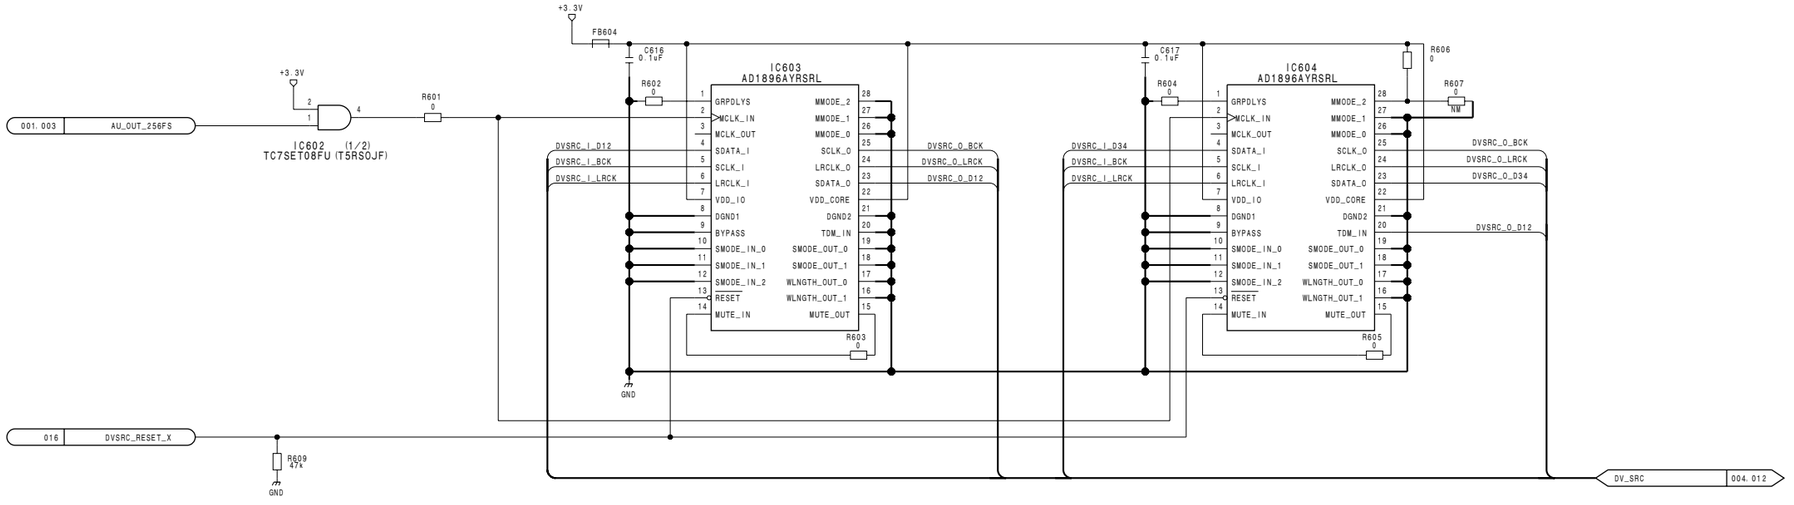

IC602 (2/2)
TC7SET08FU (T5RSOJF)



4-61

DVP-29 (7/21)
SUFFIX: -11

IC700 (1/5)
CXD3195GG-T6

008 TORINO_BMDTL

BMDT00 [Y12] 267
BMDT01 [AC10] 122
BMDT02 [AA13] 203
BMDT03 [AC12] 124
BMDT04 [AD11] 34
BMDT05 [AC11] 123
BMDT06 [AD10] 33
BMDT07 [AA12] 202
BMDT08 [Y11] 266
BMDT09 [AD9] 32
BMDT10 [AA10] 200
BMDT11 [AC8] 120
BMDT12 [AD8] 31
BMDT13 [Y10] 265
BMDT14 [AD7] 30
BMDT15 [AC7] 119

BMDT16 [AD6] 29
BMDT17 [AC4] 116
BMDT18 [AD5] 28
BMDT19 [AC5] 117
BMDT20 [AD4] 27
BMDT21 [AA5] 195
BMDT22 [AD3] 26
BMDT23 [AB2] 113
BMDT24 [Y8] 263
BMDT25 [W2] 110
BMDT26 [Y9] 264
BMDT27 [U2] 108
BMDT28 [AA2] 112
BMDT29 [W1] 19
BMDT30 [V2] 109
BMDT31 [V1] 18

BMDT32 [G1] CL701 0.8 → 008 TORINO_BMDTU
BMDT33 [H1]
BMDT34 [F1]
BMDT35 [H2]
BMDT36 [E2]
BMDT37 [D2]
BMDT38 [F2]
BMDT39 [G2]
BMDT40 [D7]
BMDT41 [A4]
BMDT42 [B5]
BMDT43 [A5]
BMDT44 [B7]
BMDT45 [B6]
BMDT46 [D8]
BMDT47 [A6]

BMDT48 [B8]
BMDT49 [A7]
BMDT50 [D9]
BMDT51 [A9]
BMDT52 [B9]
BMDT53 [B10]
BMDT54 [A10]
BMDT55 [A11]
BMDT56 [B13]
BMDT57 [A12]
BMDT58 [D15]
BMDT59 [B11]
BMDT60 [B12]
BMDT61 [B14]
BMDT62 [A13]
BMDT63 [B15]

008 TORINO_OMDQL

OMDQ0 [AA11] 201
OMDQ1 [AA9] 199
OMDQ2 [AC6] 118
OMDQ3 [Y1] 20

OMDQ4 [H4] CL702 0.8 → 008 TORINO_OMDQU
OMDQ5 [A3]
OMDQ6 [A8]
OMDQ7 [D12]

008 TORINO_OMADB

OMADB0 [L5] 251
OMADB1 [M4] 185

OMAD00 [T1] CL703 0.8 → 008 TORINO_OMAD
OMAD01 [U1]
OMAD02 [T2]
OMAD03 [R4]
OMAD04 [R2]
OMAD05 [R1]
OMAD06 [P5]
OMAD07 [N5]
OMAD08 [N2]
OMAD09 [M2]
OMAD10 [P2]
OMAD11 [P1]
OMAD12 [N1]
OMAD13 [M5]

BMDQS0 [AC3] 115
BMDQS1 [Y2] 111
BMDQS2 [E1] 5
BMDQS3 [B2] 93

008 TORINO_OMCKE → OMCKE [L2] 102
008 TORINO_OMRSX → OMRSX [J4] 182
008 TORINO_OMCSX → OMCSX [K2] 101
008 TORINO_OMWEX → OMWEX [J2] 100
008 TORINO_OMCEX → CL700 0.8 → OMCEX [J1] 9
008 TORINO_OMCLK → R700 10 → OMCLK [L1] 11
OMCLKX [K1] 10

IC700 (2/5)
CXD3195GG-T6

001 ENC_V_CLK → IVCLK [F24] 65
001 ENC_V_DATA

ENC_V_Y0 154
ENC_V_Y1 153
ENC_V_Y2 66
ENC_V_Y3 227
ENC_V_Y4 229
ENC_V_Y5 67
ENC_V_Y6 155
ENC_V_Y7 228

BVYDT0 [D23]
BVYDT1 [E23]
BVYDT2 [E24]
BVYDT3 [E21]
BVYDT4 [D20]
BVYDT5 [D24]
BVYDT6 [C23]
BVYDT7 [D21]

ENC_V_C0 231
ENC_V_C1 68
ENC_V_C2 156
ENC_V_C3 232
ENC_V_C4 158
ENC_V_C5 159
ENC_V_C6 73
ENC_V_C7 161

BVCDT0 [D18]
BVCDT1 [C24]
BVCDT2 [B23]
BVCDT3 [D17]
BVCDT4 [B21]
BVCDT5 [B20]
BVCDT6 [A21]
BVCDT7 [B18]

ENC_V_HD 296
ENC_V_VD 295
ENC_V_FR 294

BVHSYNC [E14]
BVVSYNC [E15]
BVFLDID [E16]

R710 0 → 292 IVFSYNC [E18]
R705 10 → 72 OVCLK [A22]

RB703 47k: 59 IPCLK [M24]; 146 BADT12 [M23]; 220 BADT34 [M21]
RB704 47k: 145 OADT12 [N23]; 219 OADT34 [N21]; 218 IAFS [P21]
R711 47k → 224 ICBRD [H21]
RB705 47k: 225 ICBDT0 [G21]; 149 ICBDT1 [J23]; 289 ICBDT2 [F20]; 151 ICBDT3 [G23]
RB706 47k: 222 ICBDT4 [K21]; 223 ICBDT5 [J21]; 150 ICBDT6 [H23]; 287 ICBDT7 [H20]
R712 47k → 288 OCBRDD [G20]
R713 47k → 226 OCBRDP [F21]
R714 47k → 63 ICBCLK [H24]

IBCLK1 [AD22] 45
IBDT10 [AD21] 44
IBDT11 [AA21] 211
IBDT12 [AD20] 43
IBDT13 [AC20] 132
IBDT14 [AD19] 42
IBDT15 [AC19] 131
IBDT16 [AA19] 209
IBDT17 [AA18] 208
IBRDY1 [AA17] 207 → GND

OBRDY1 [Y18] 273

IBCLK [AD12] 35 → TORINO_BSCK 008, TORINO_BSDT 011

BBDT0 [Y13]
BBDT1 [AC13]
BBDT2 [AA14]
BBDT3 [AC14]
BBDT4 [AA15]
BBDT5 [AC15]
BBDT6 [AD15]
BBDT7 [AC16]

RB711 10: 268 BBDT0 [Y13] → TORINO_BS0; 125 BBDT1 [AC13] → TORINO_BS1; 204 BBDT2 [AA14] → TORINO_BS2; 126 BBDT3 [AC14] → TORINO_BS3
RB712 10: 205 BBDT4 [AA15] → TORINO_BS4; 127 BBDT5 [AC15] → TORINO_BS5; 38 BBDT6 [AD15] → TORINO_BS6; 128 BBDT7 [AC16] → TORINO_BS7

IBRDY [AD17] R717 0 → 40 TORINO_IRDY
OBRDY [AD16] R718 10 → 39 TORINO_ORDY

IACLK [AD18] RB707 47k: 41 → GND; 129; 206
BBADT [AC17]
OBADT [AA16]
IBARDY [AC18] 130
OBARDY [Y17] 272

OCARD [G24] 64

OCADT0 [L23] 147
OCADT1 [F23] 152
OCADT2 [L24] 60
OCADT3 [K23] 148
OCADT4 [E20] 290
OCADT5 [E19] 291
OCADT6 [J20] 286
OCADT7 [J24] 62

ICARDD [K20] 285 R715 47k → GND
ICARDP [L21] 221 R716 47k → GND
OCACLK [K24] 61 R706 10 → GND

4-62

DVP-29 (7/21)
SUFFIX: -11

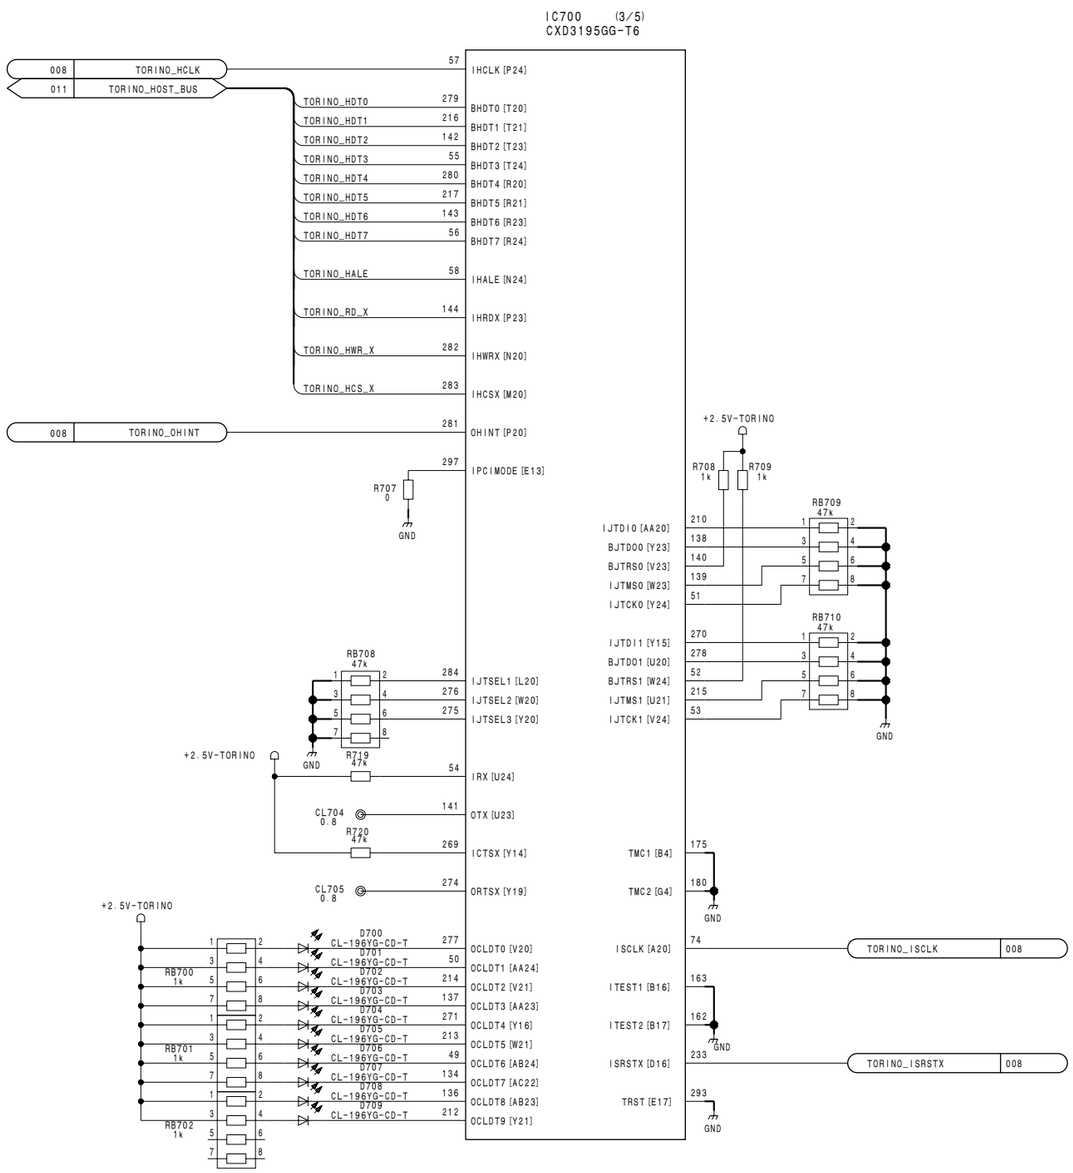

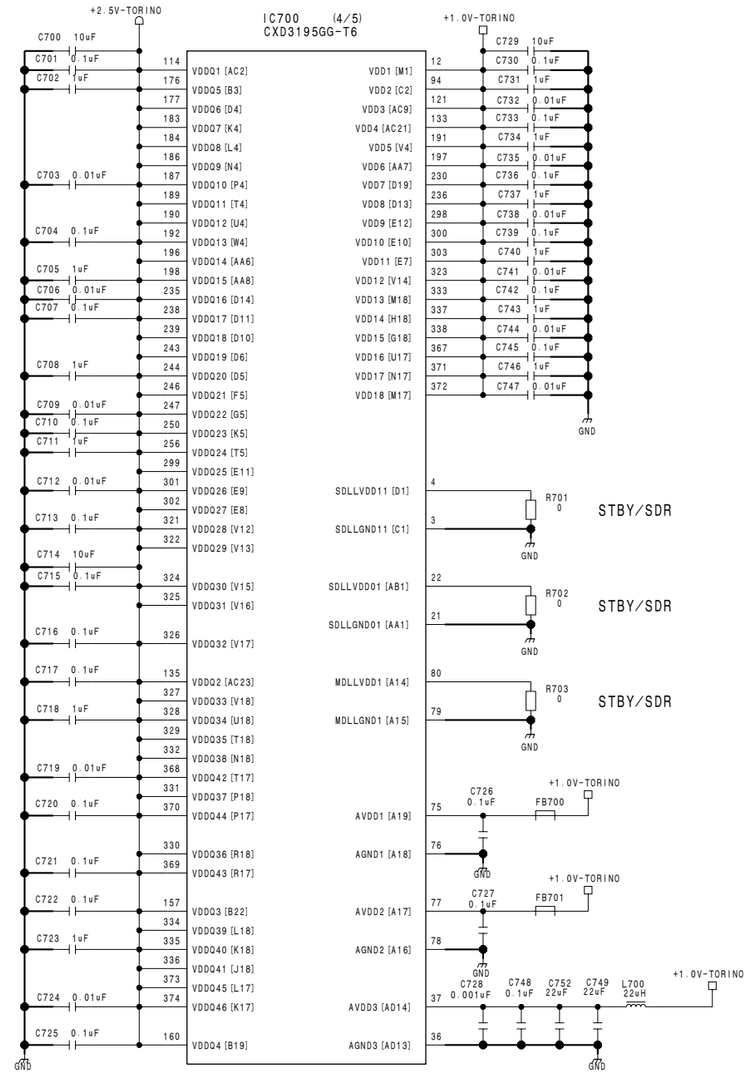

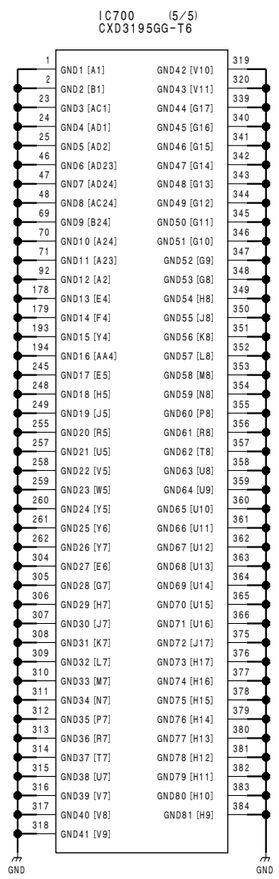

DVP-29 (7/21)
BOARD NO. 1-869-660-11
PDW-F350_DVP-29_11F_7

DVP-29 (8/21)
SUFFIX: -11

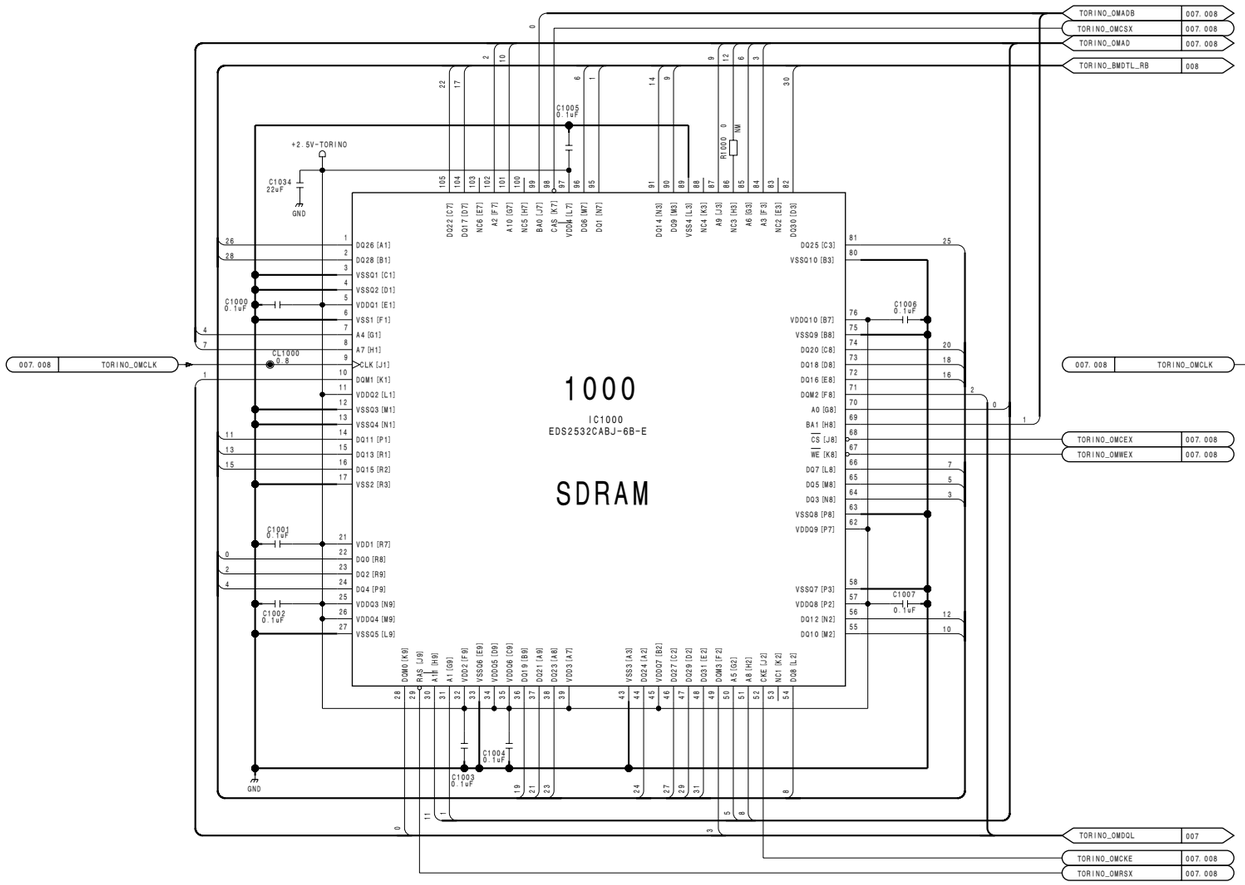

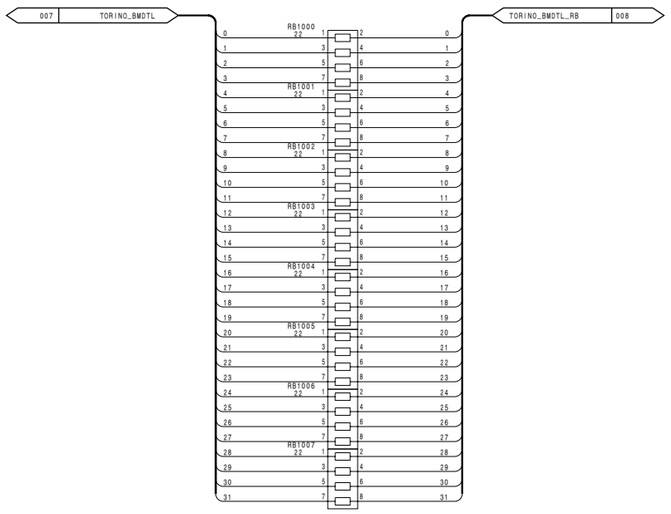

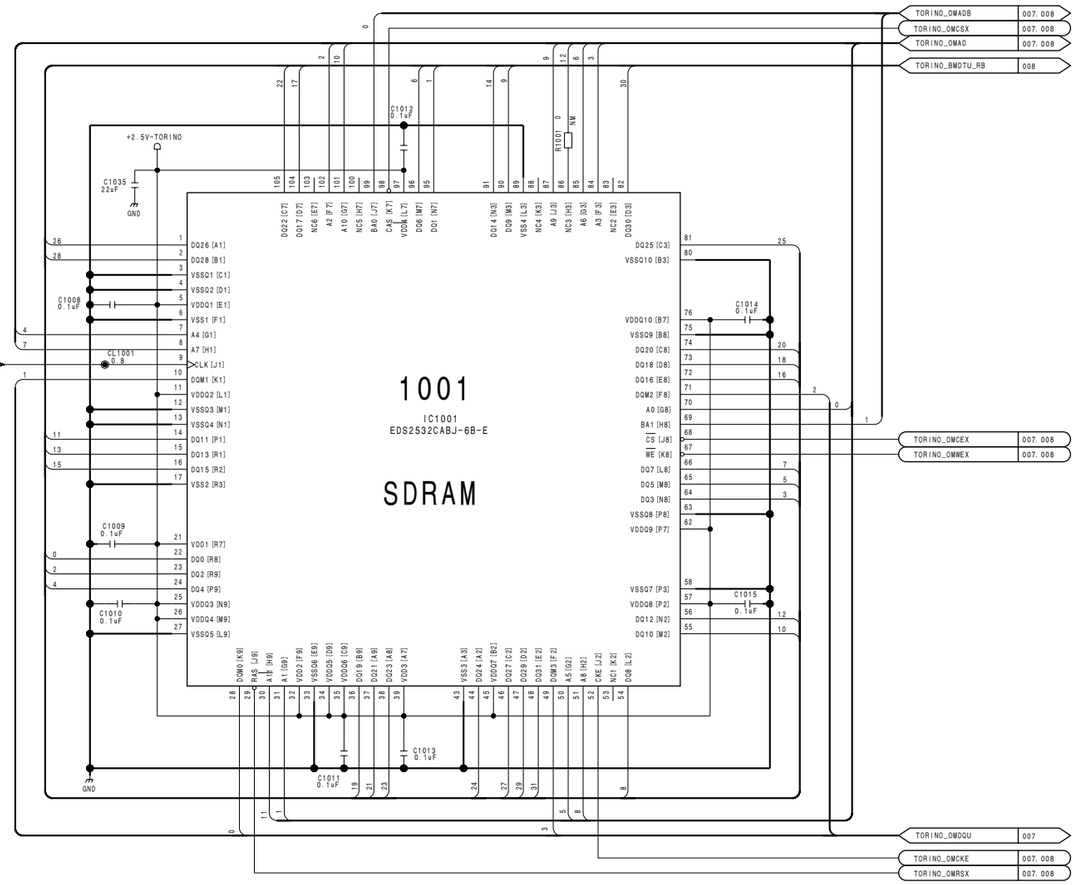

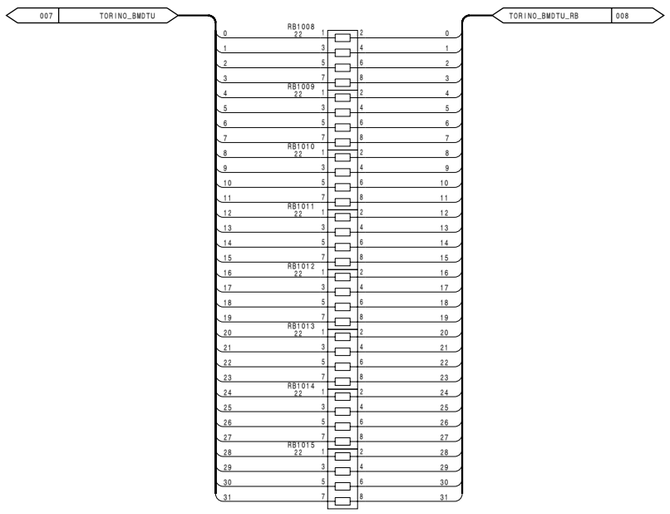

DVP-29 (8/21)
SUFFIX: -11

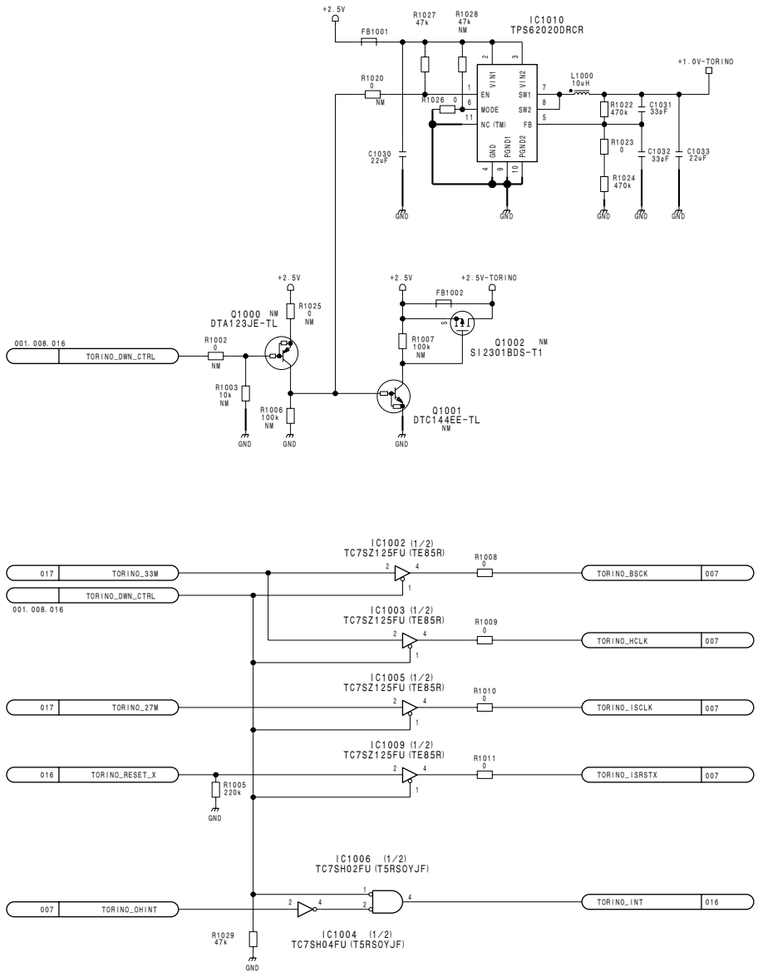

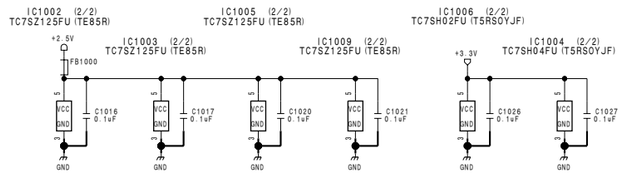

DVP-29 (8/21)

BOARD NO. 1-869-660-11

PDW-F350_DVP-29_11F_8

DVP-29 (9/21)
SUFFIX: -11

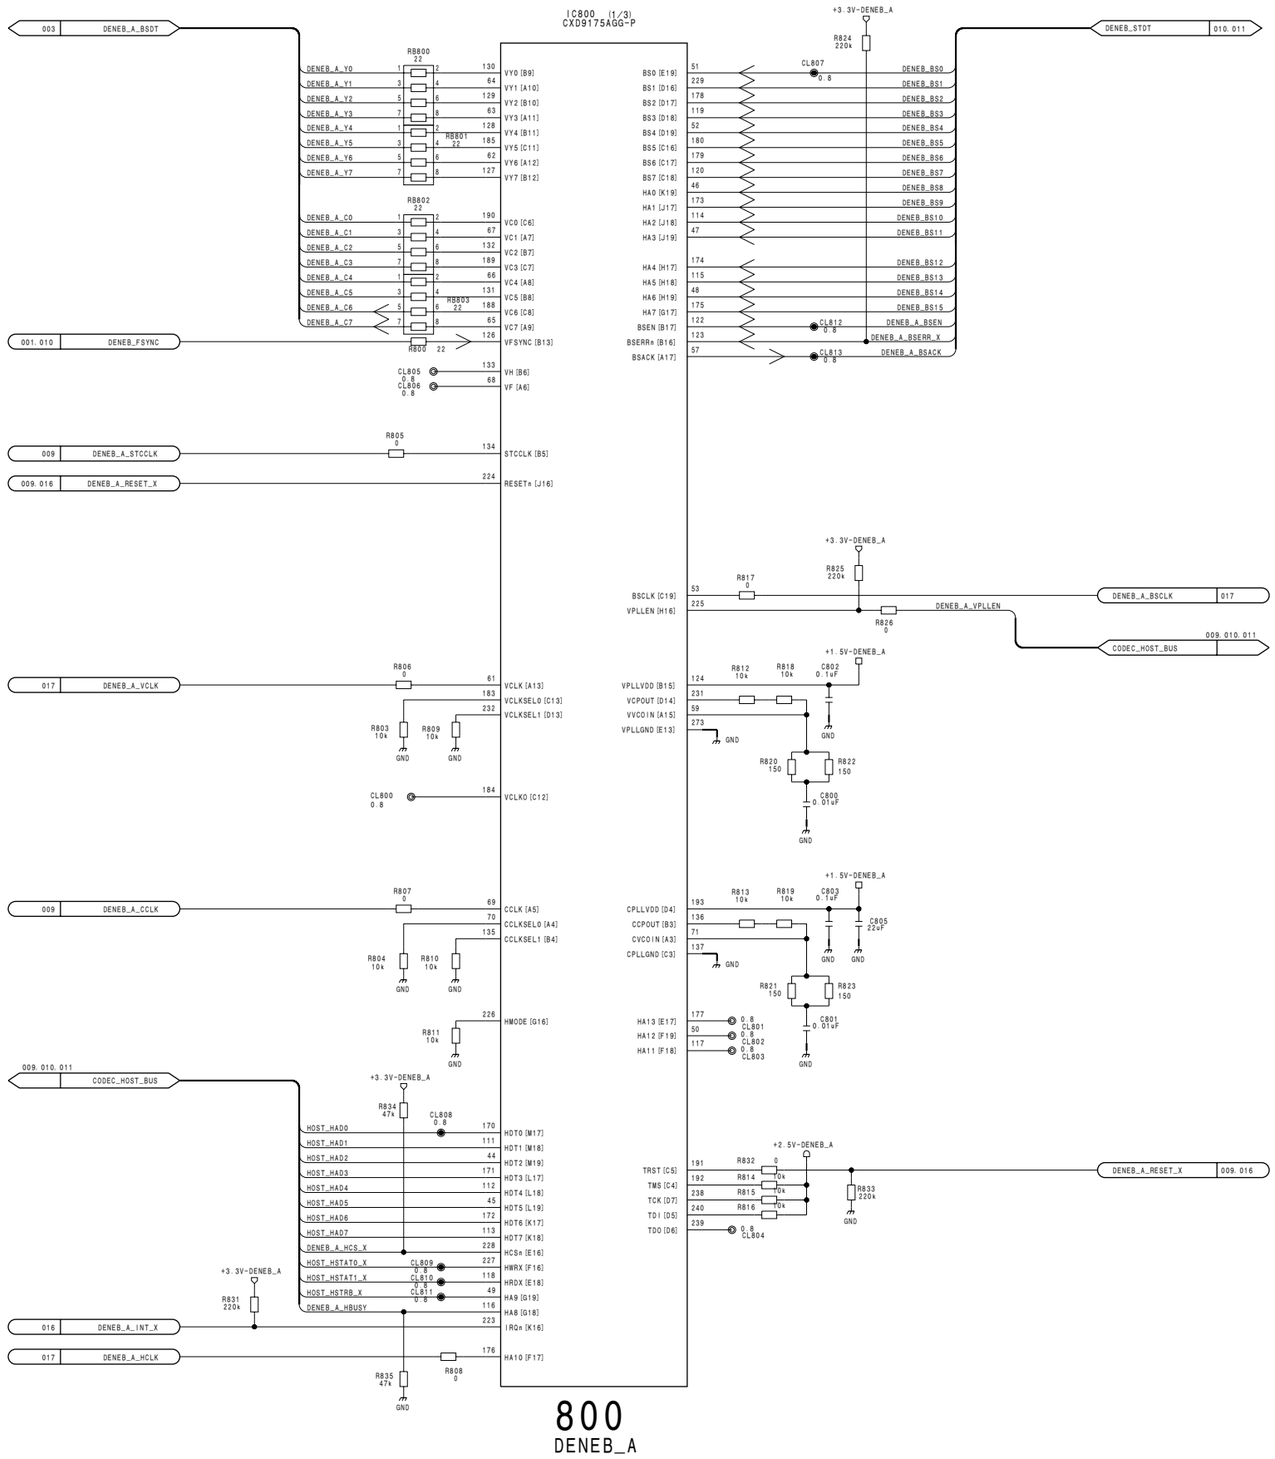

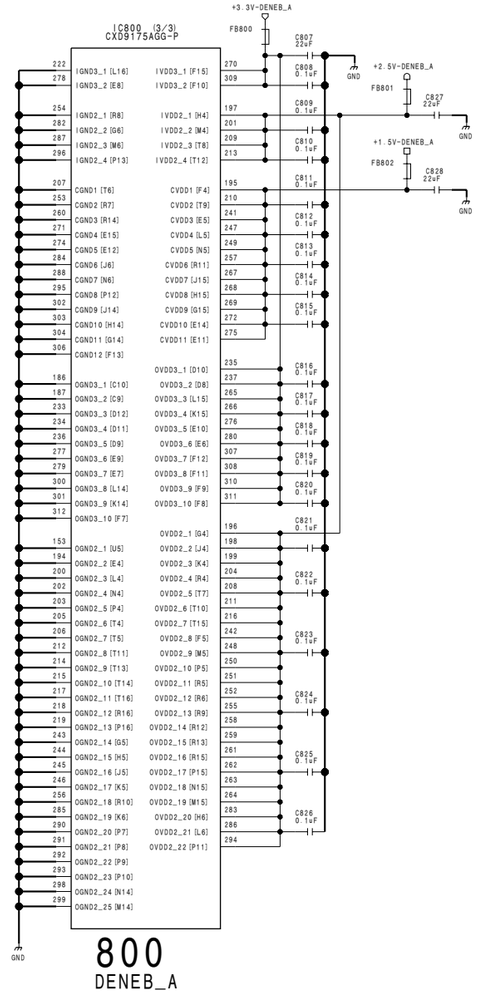

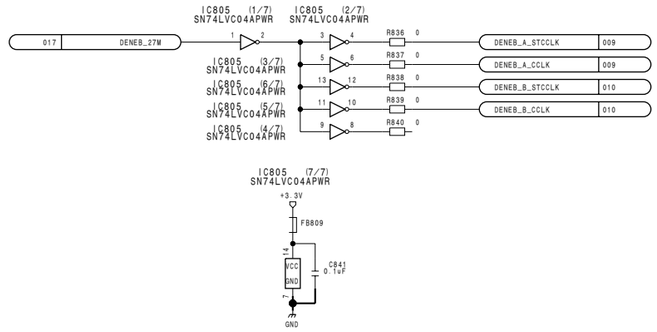

4-66

DVP-29 (9/21)
SUFFIX: -11

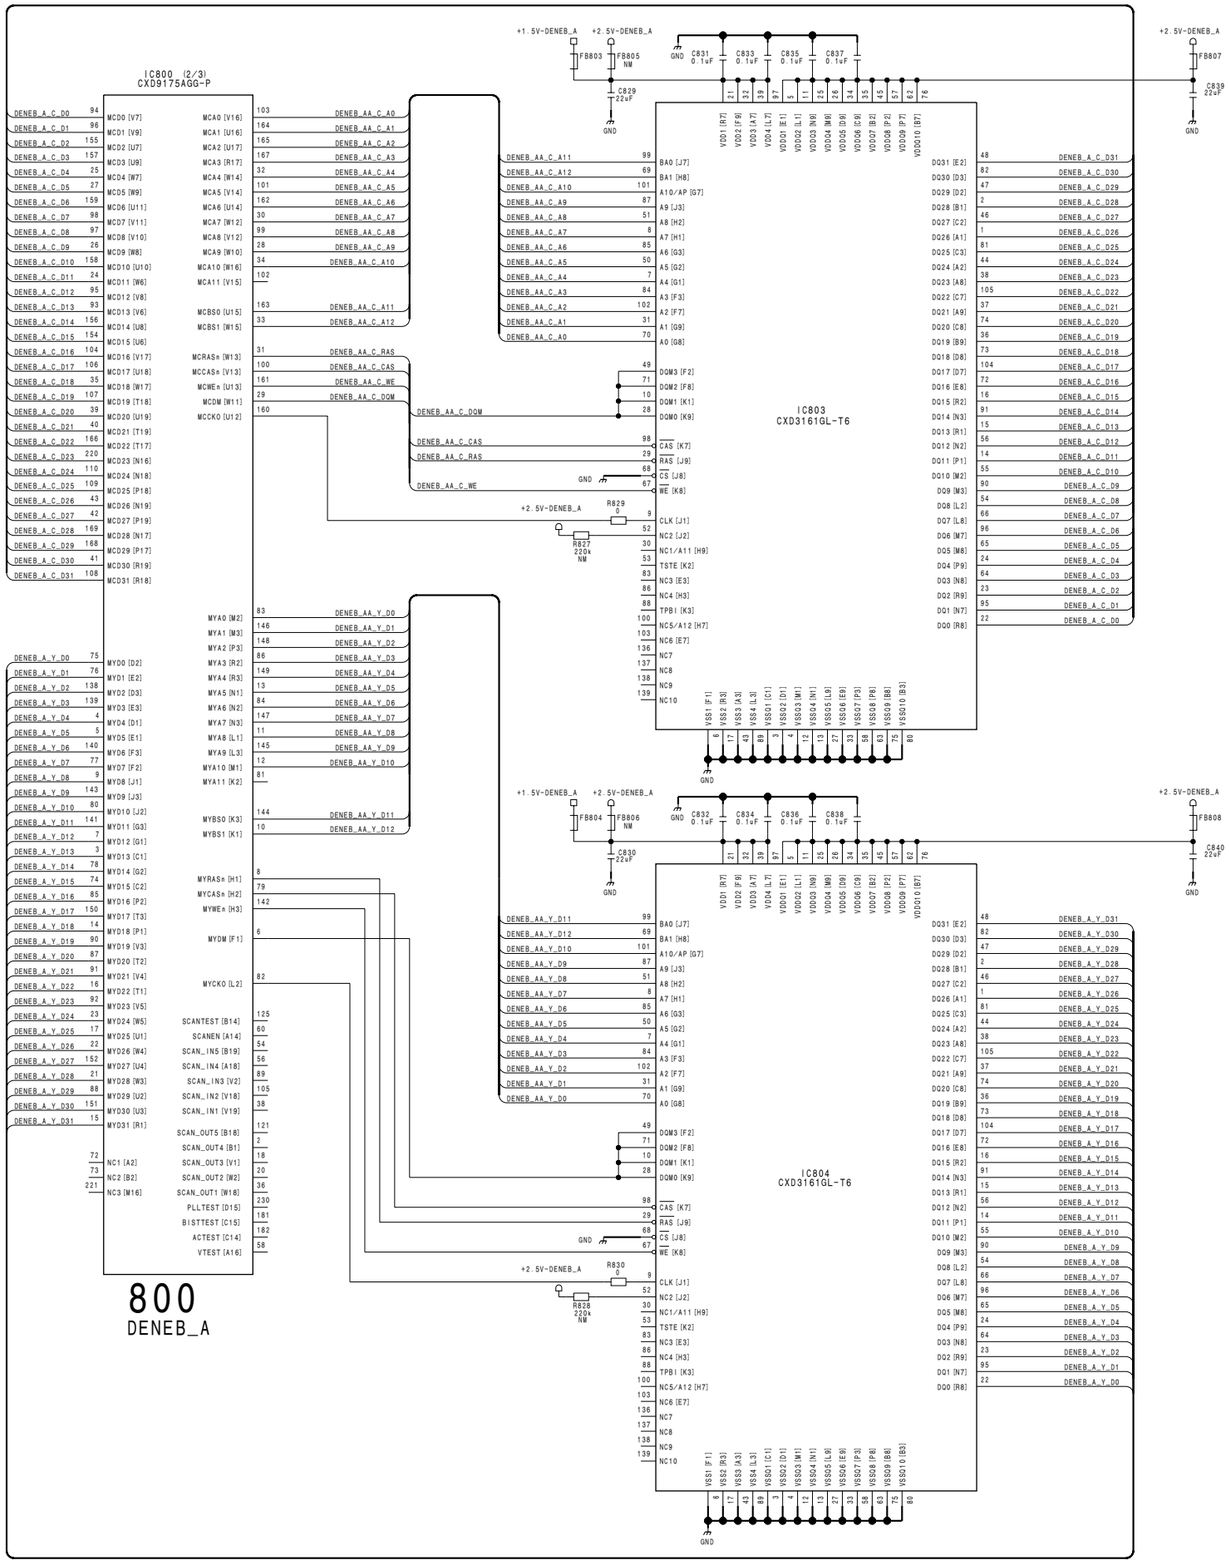

DVP-29 (10/21)
SUFFIX: -11

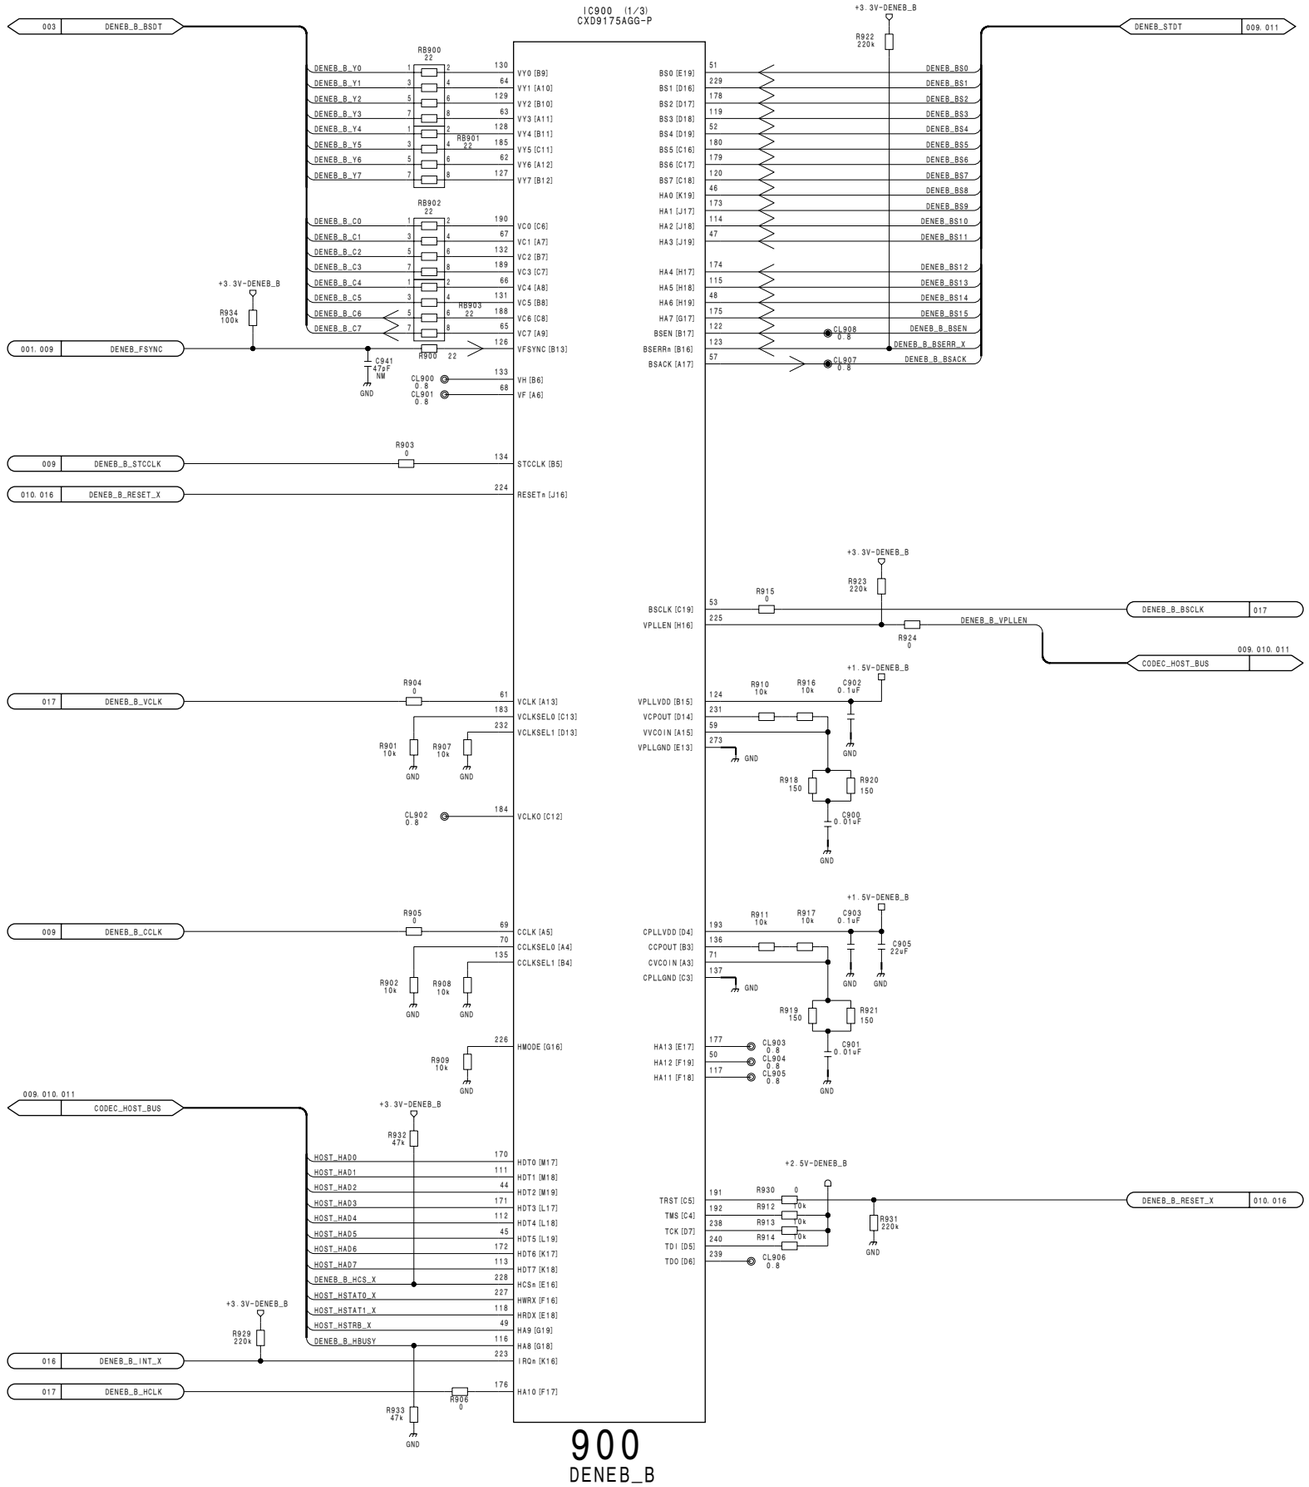

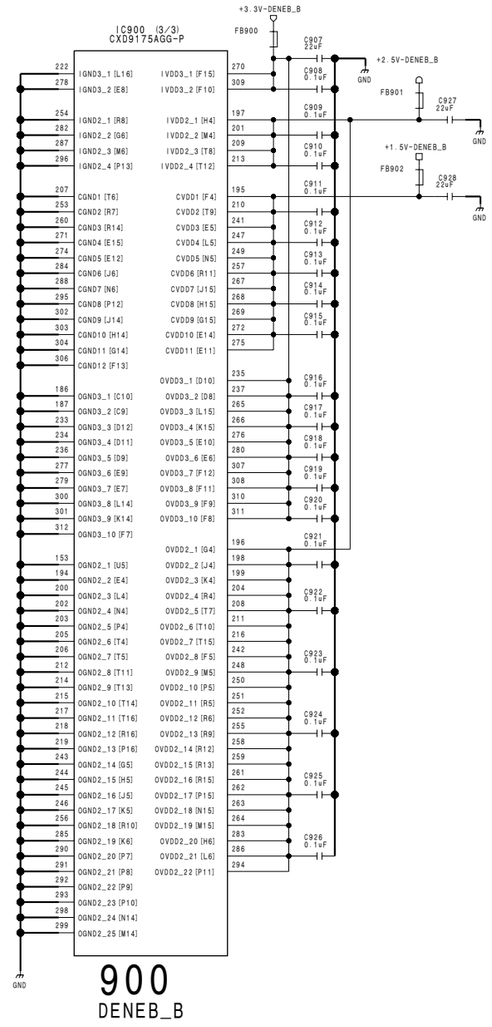

4-68

DVP-29 (10/21)
SUFFIX: -11

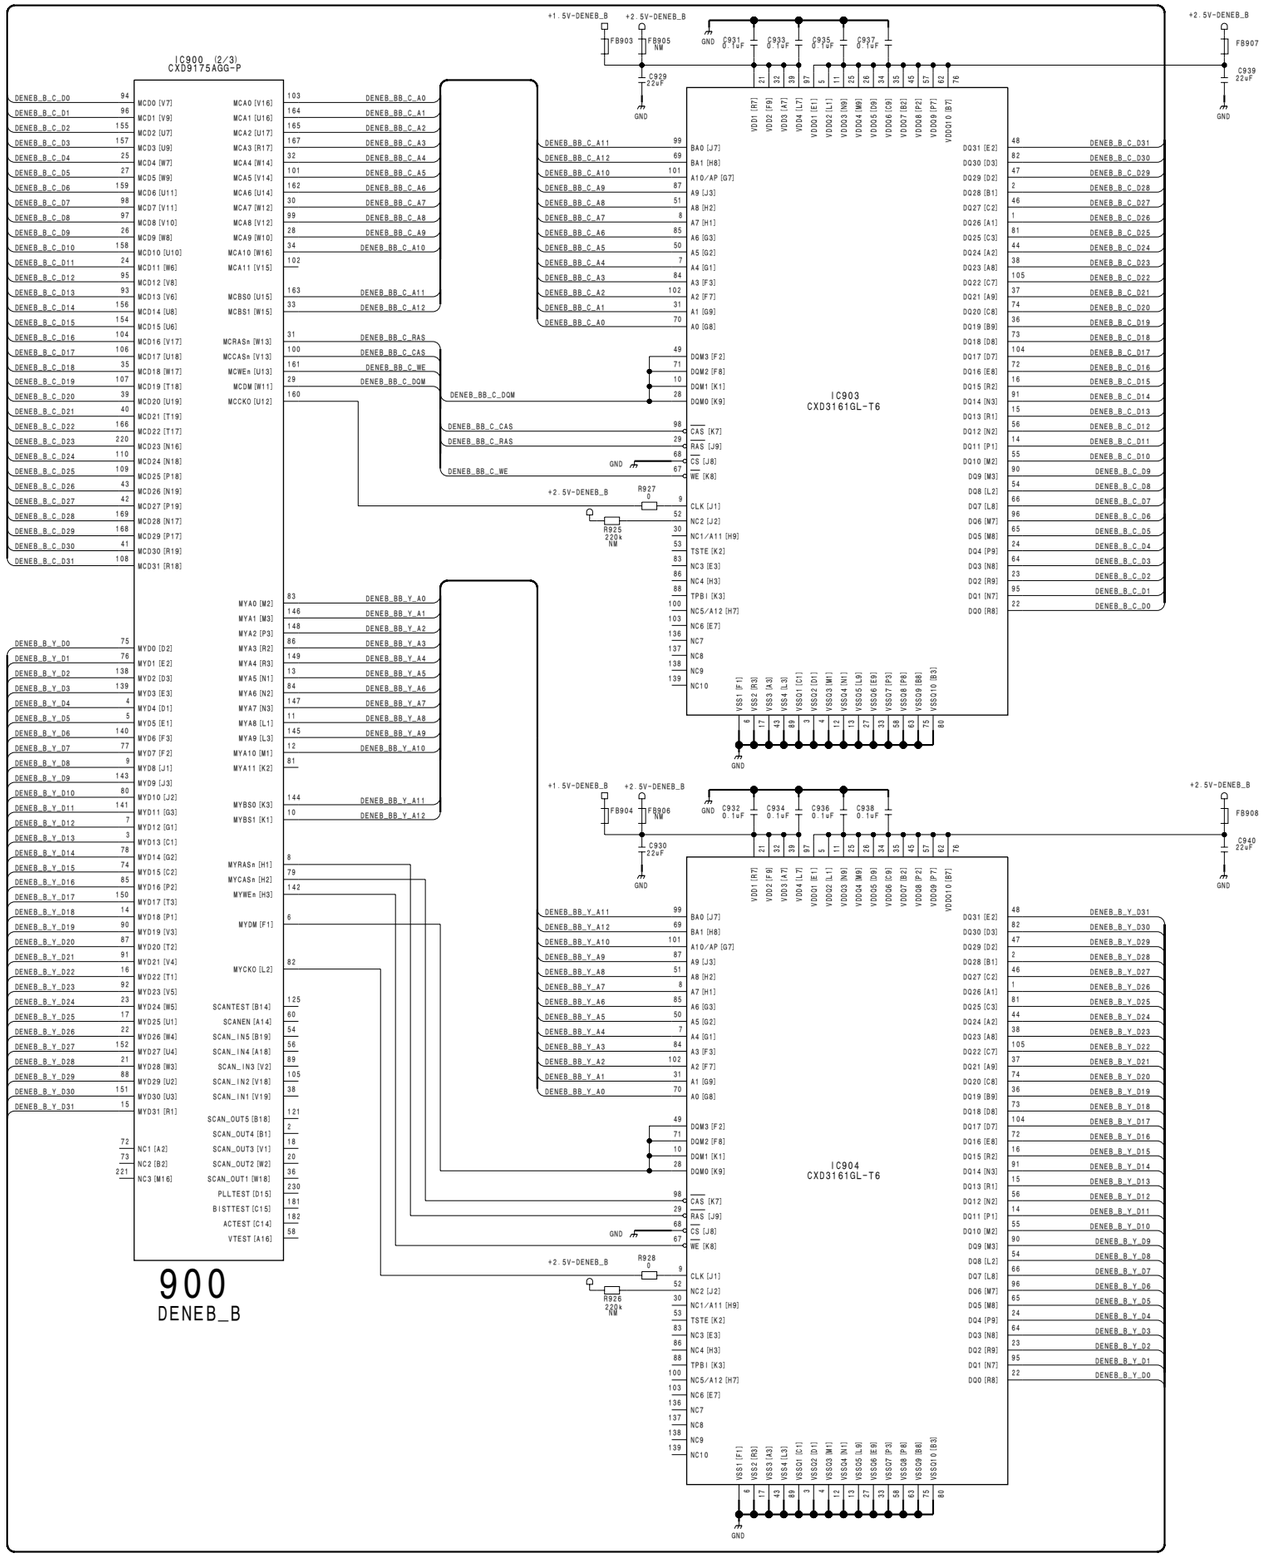

DVP-29 (11/21)
SUFFIX: -11

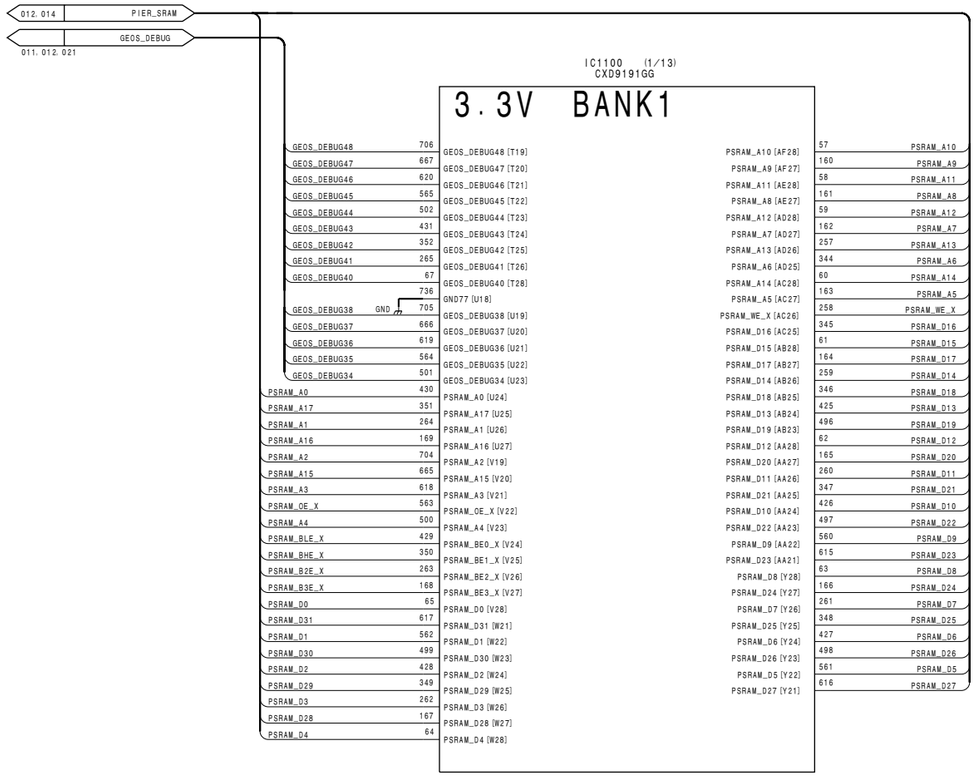

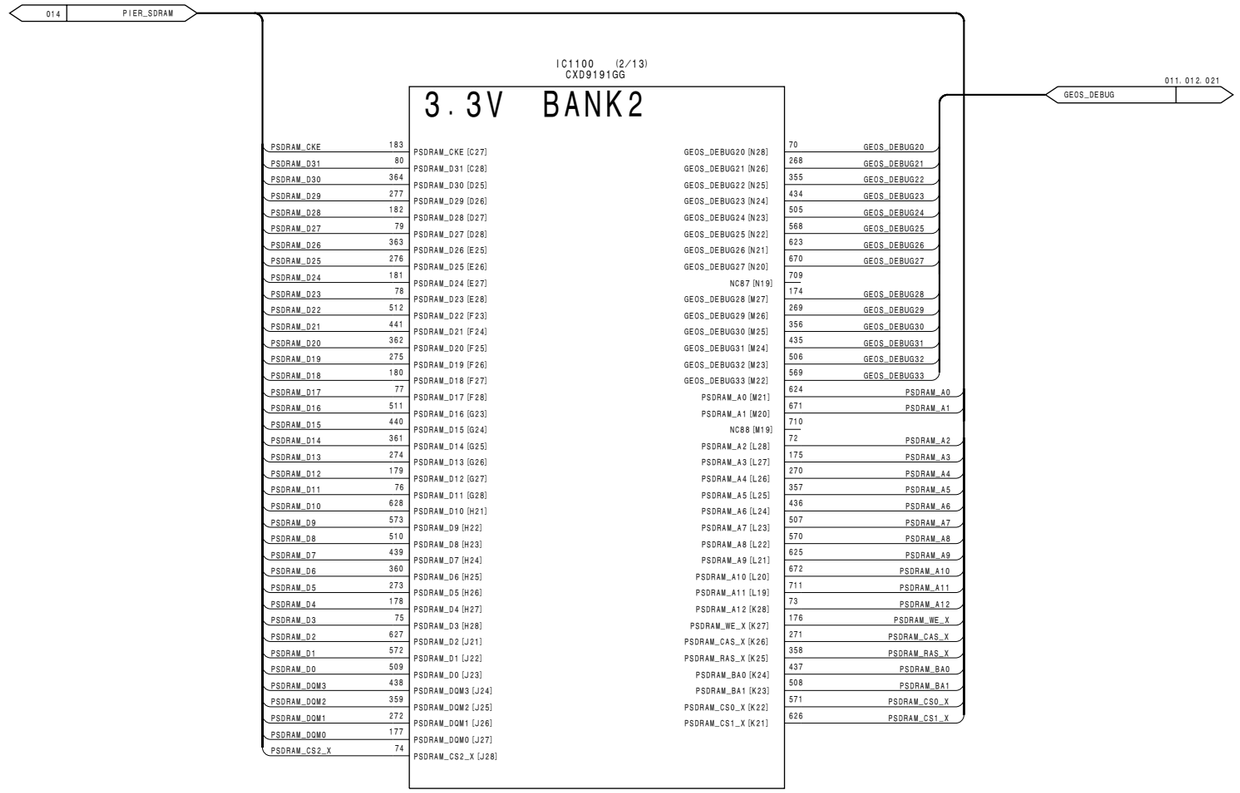

DVP-29 (11/21)
SUFFIX: -11

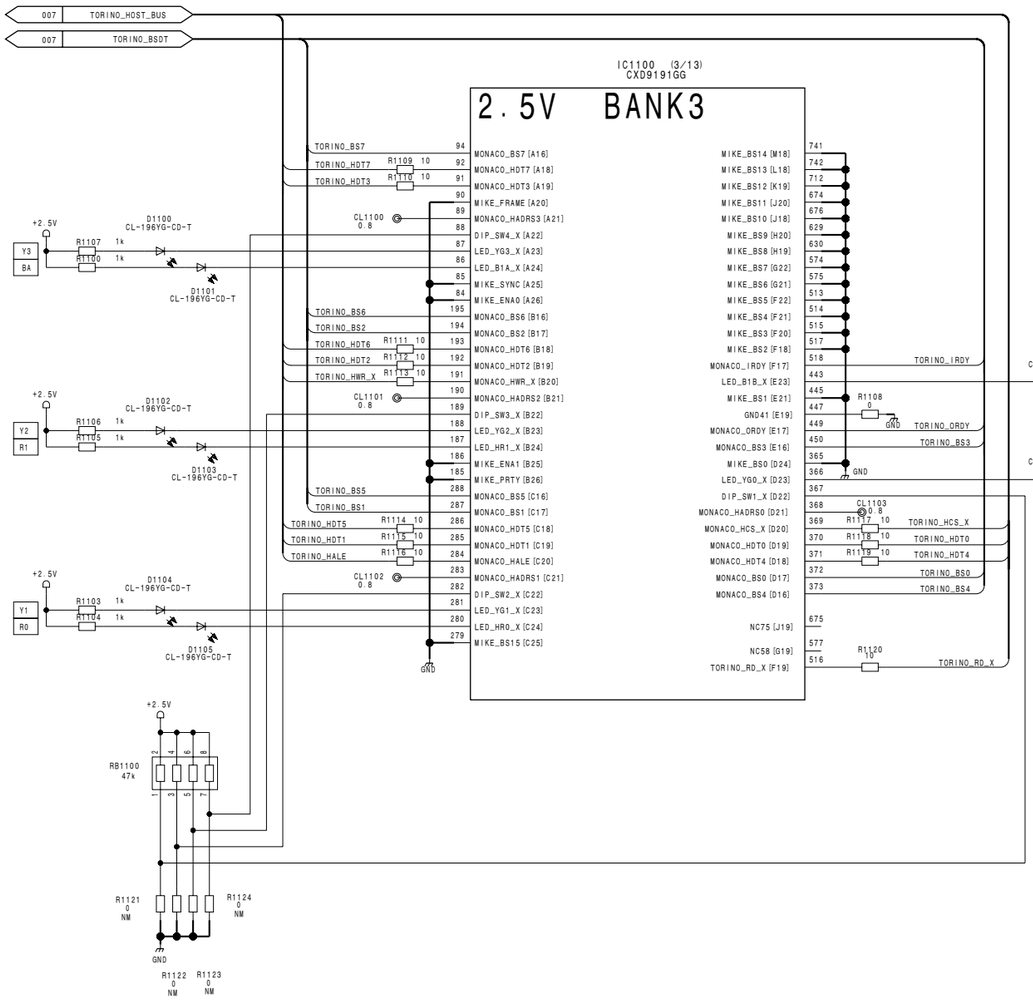

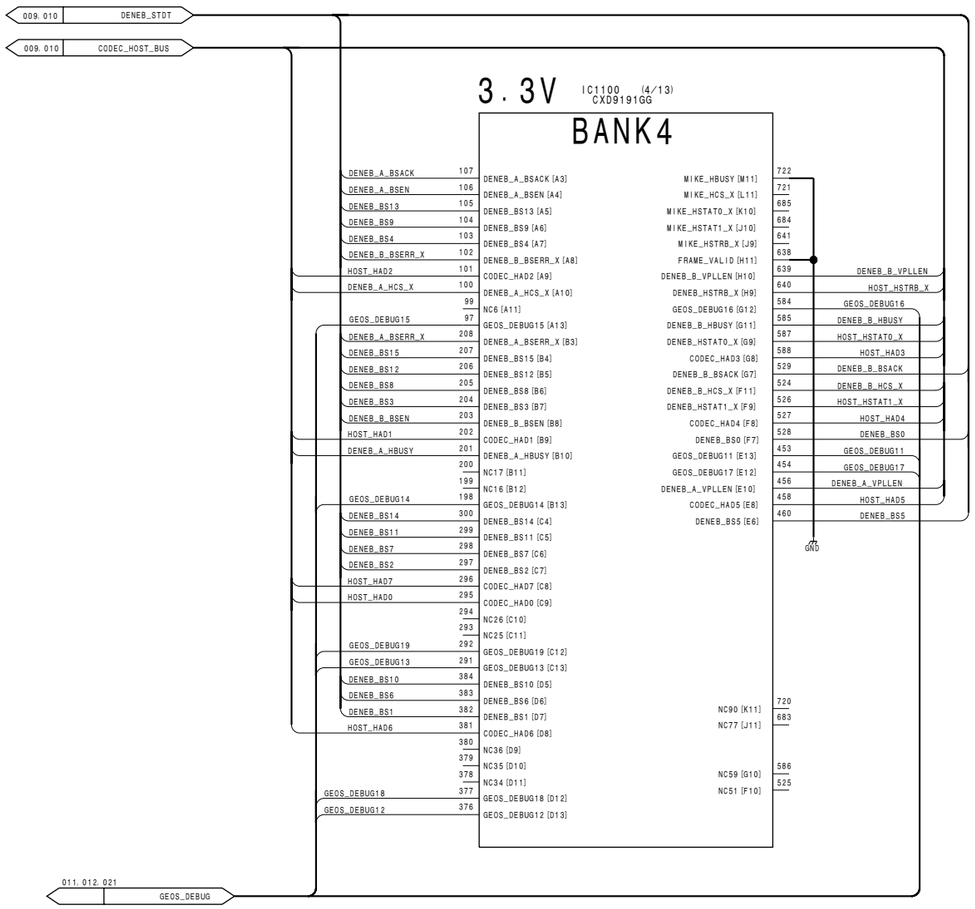

DVP-29 (11/21)
BOARD NO. 1-869-660-11
PDW-F350_DVP-29_11F_11

DVP-29 (12/21)
SUFFIX: -11

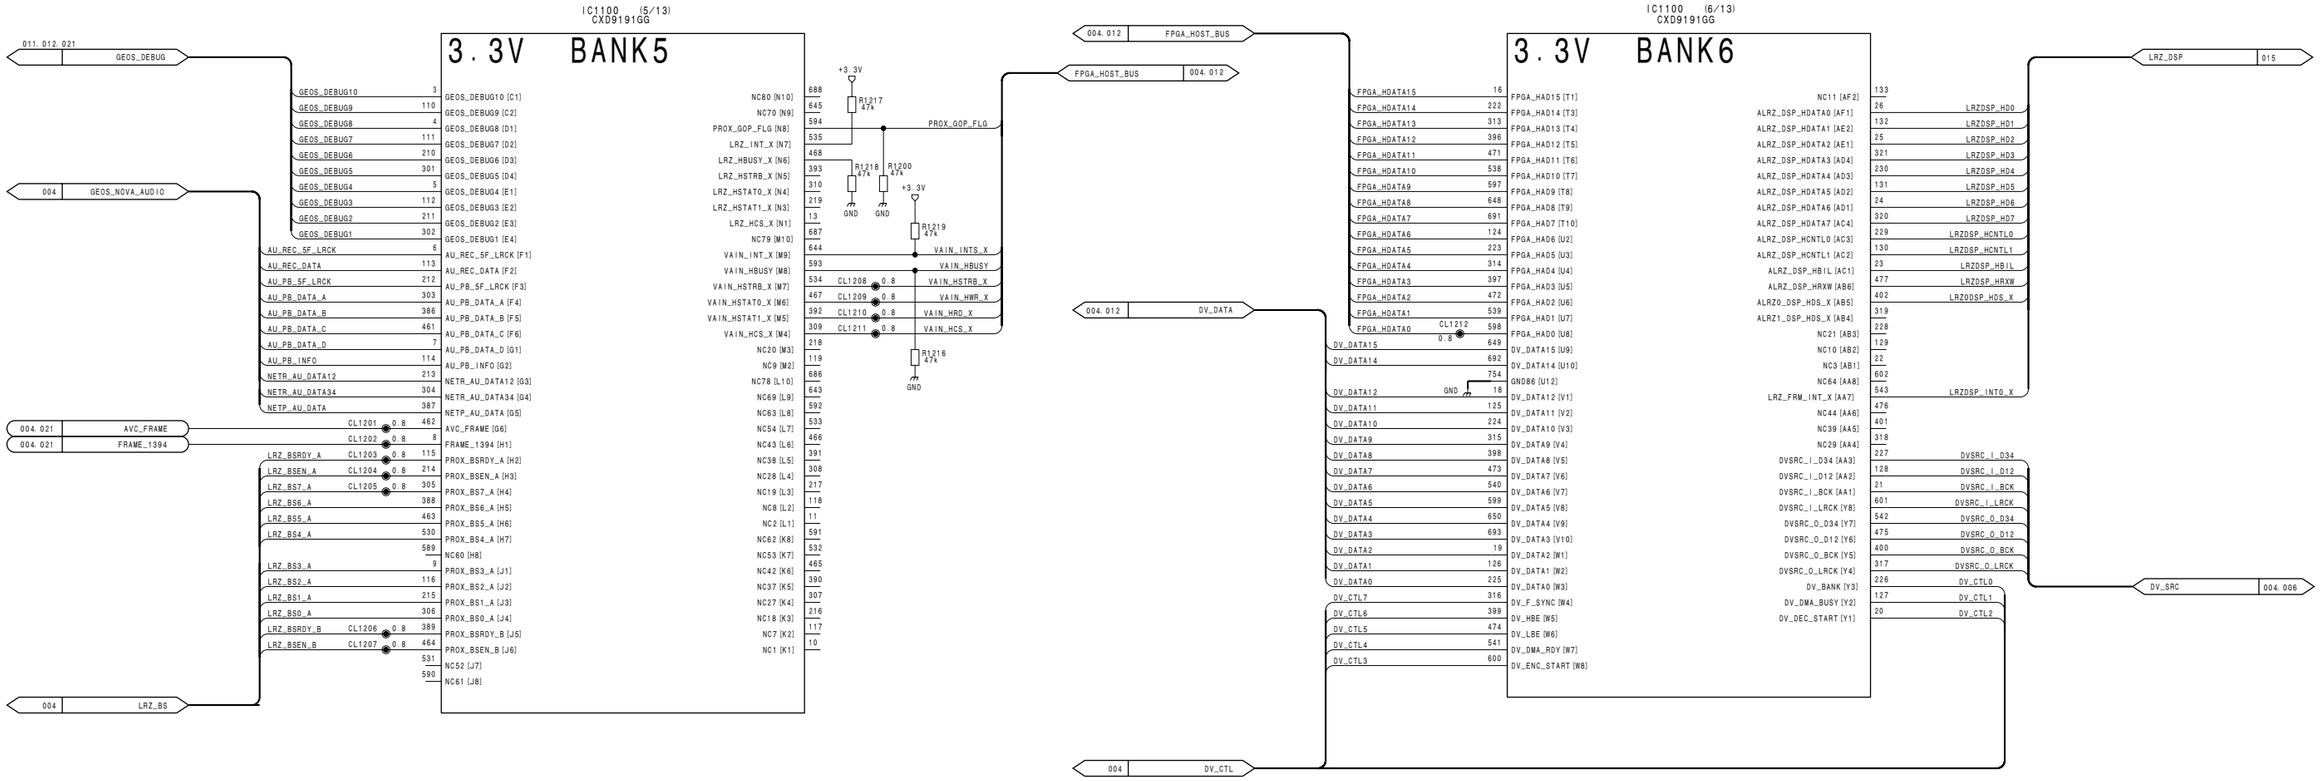

DVP-29 (12/21)
SUFFIX: -11

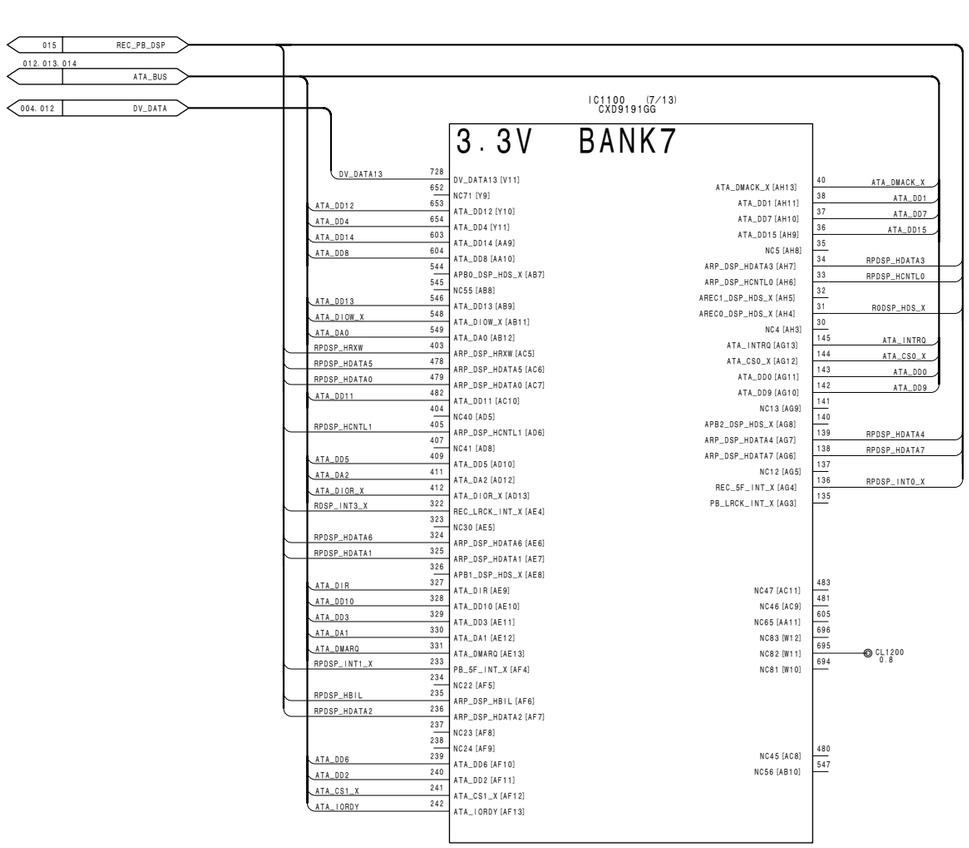

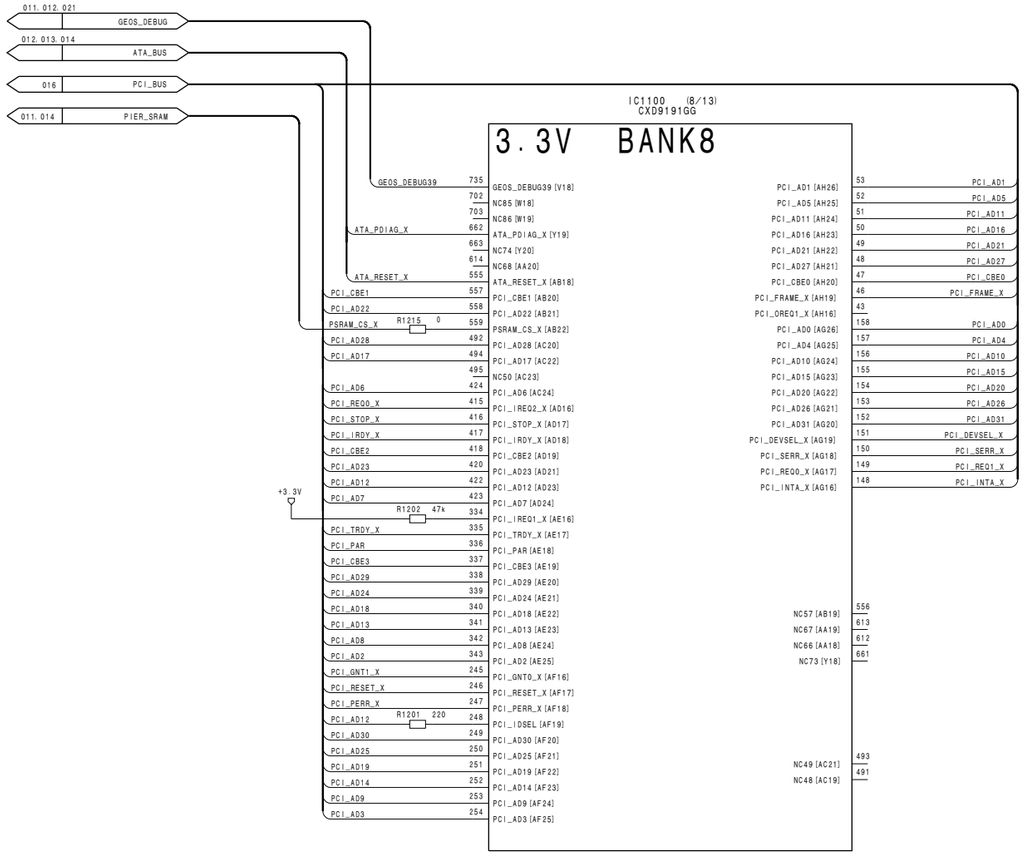

DVP-29 (12/21)
BOARD NO. 1-869-660-11
PDW-F350_DVP-29_11F_12

DVP-29 (13/21)
SUFFIX: -11

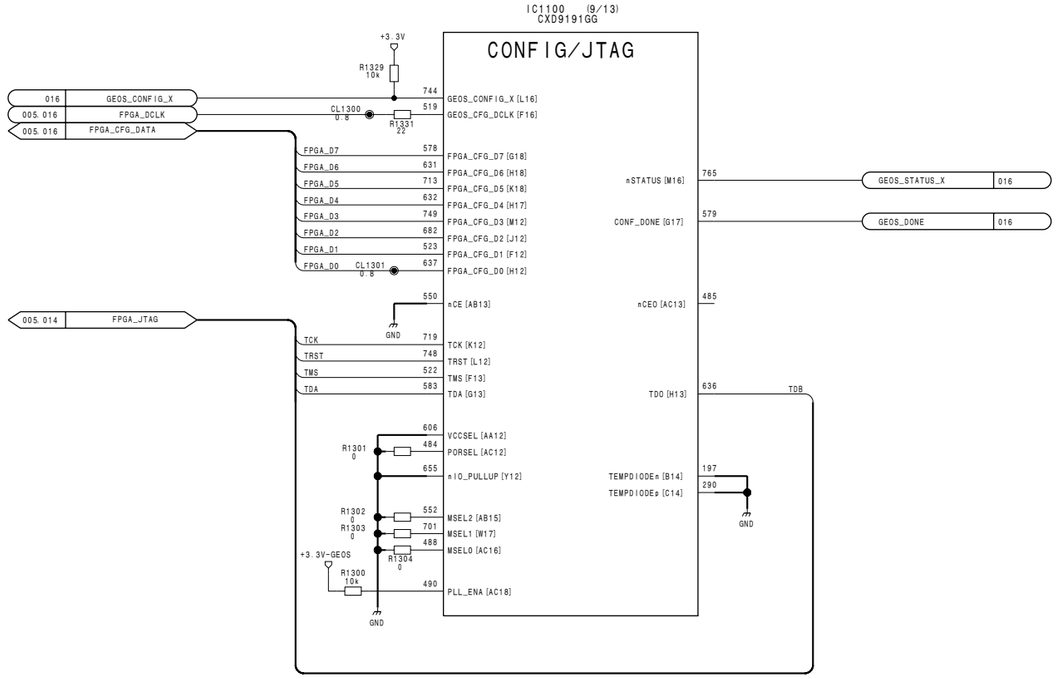

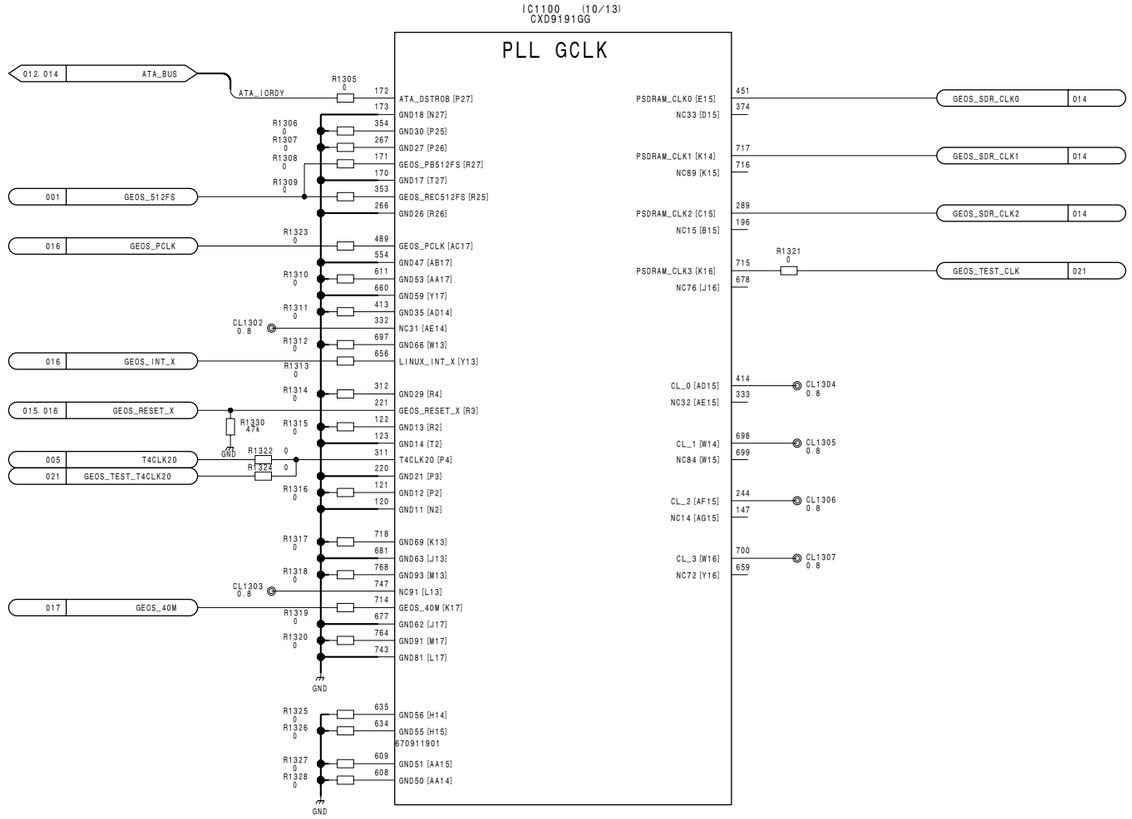

4-74

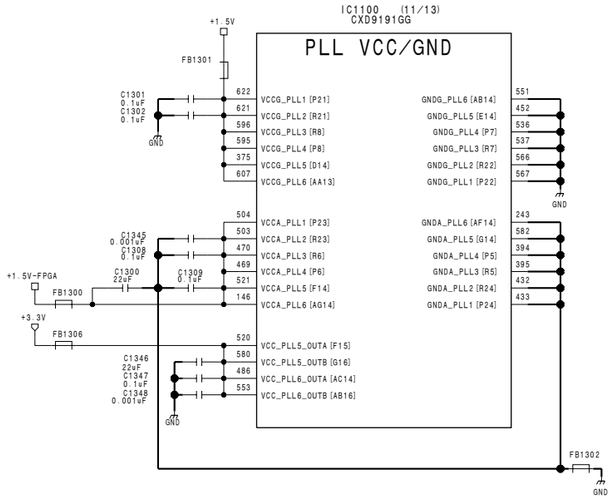

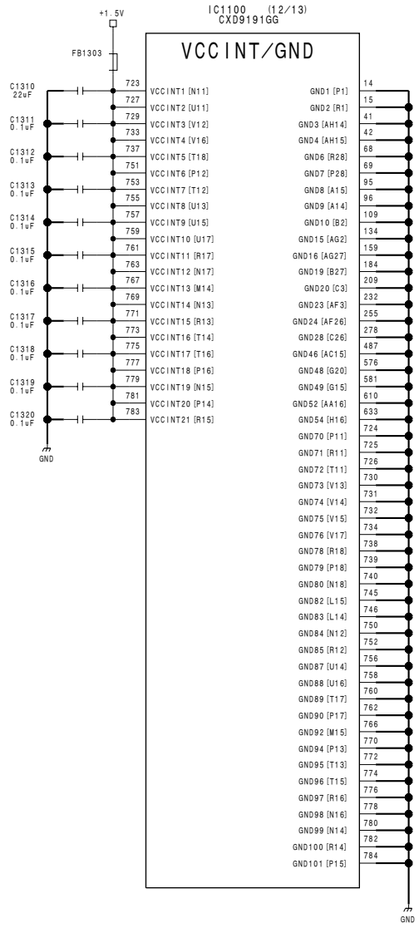

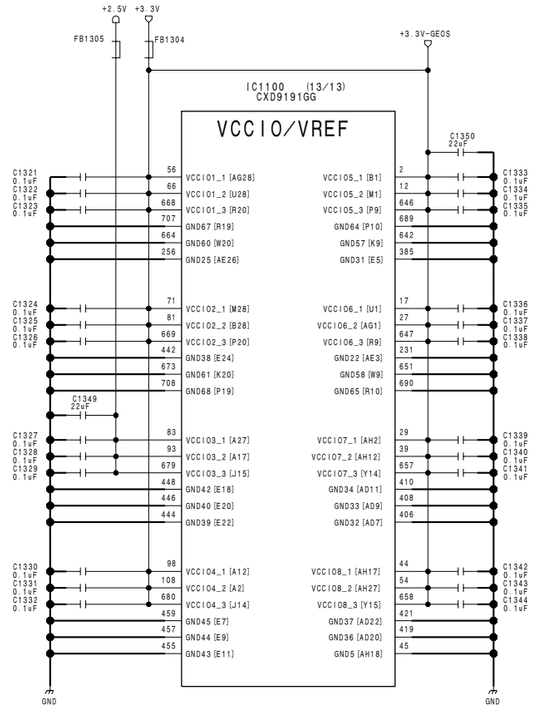

DVP-29 (13/21)
BOARD NO. 1-869-660-11
PDW-F350_DVP-29_11F_13

DVP-29 (14/21) **SUFFIX: -11**

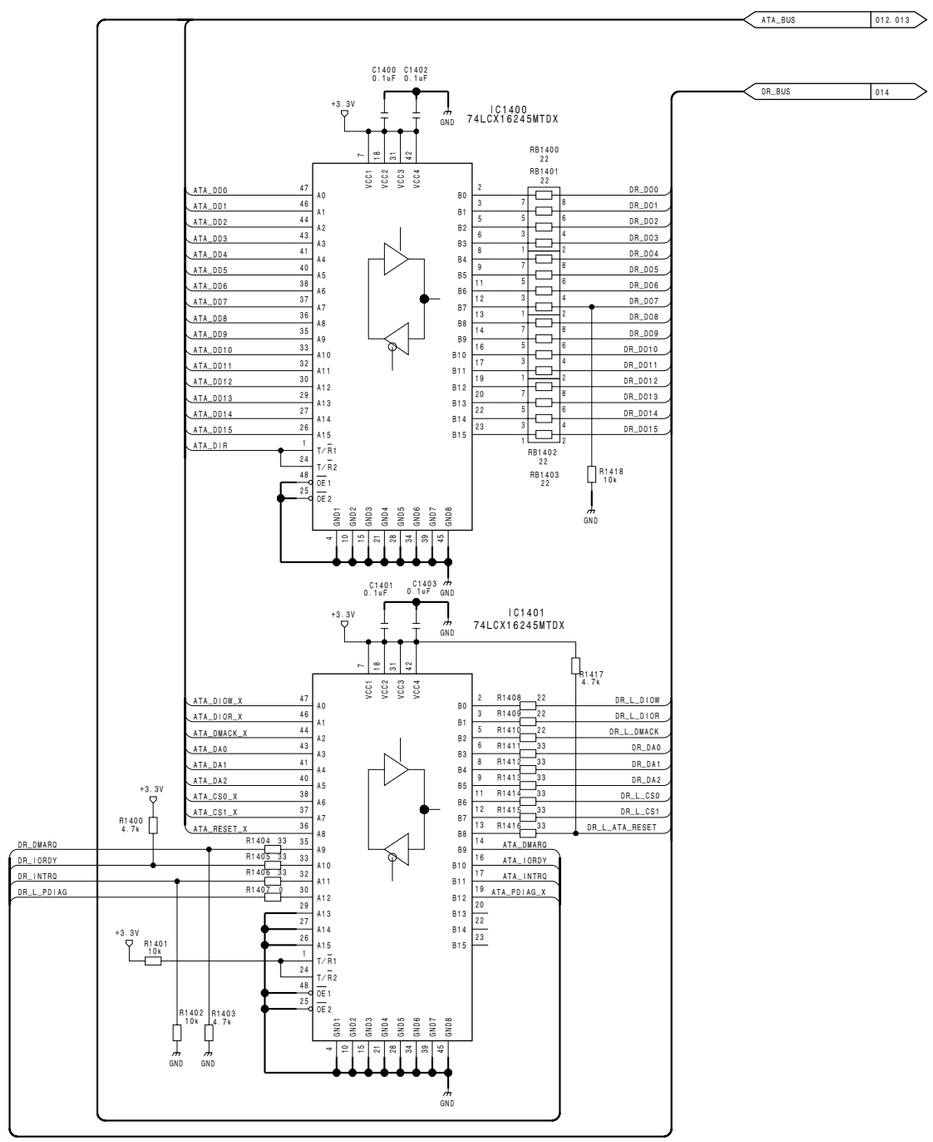

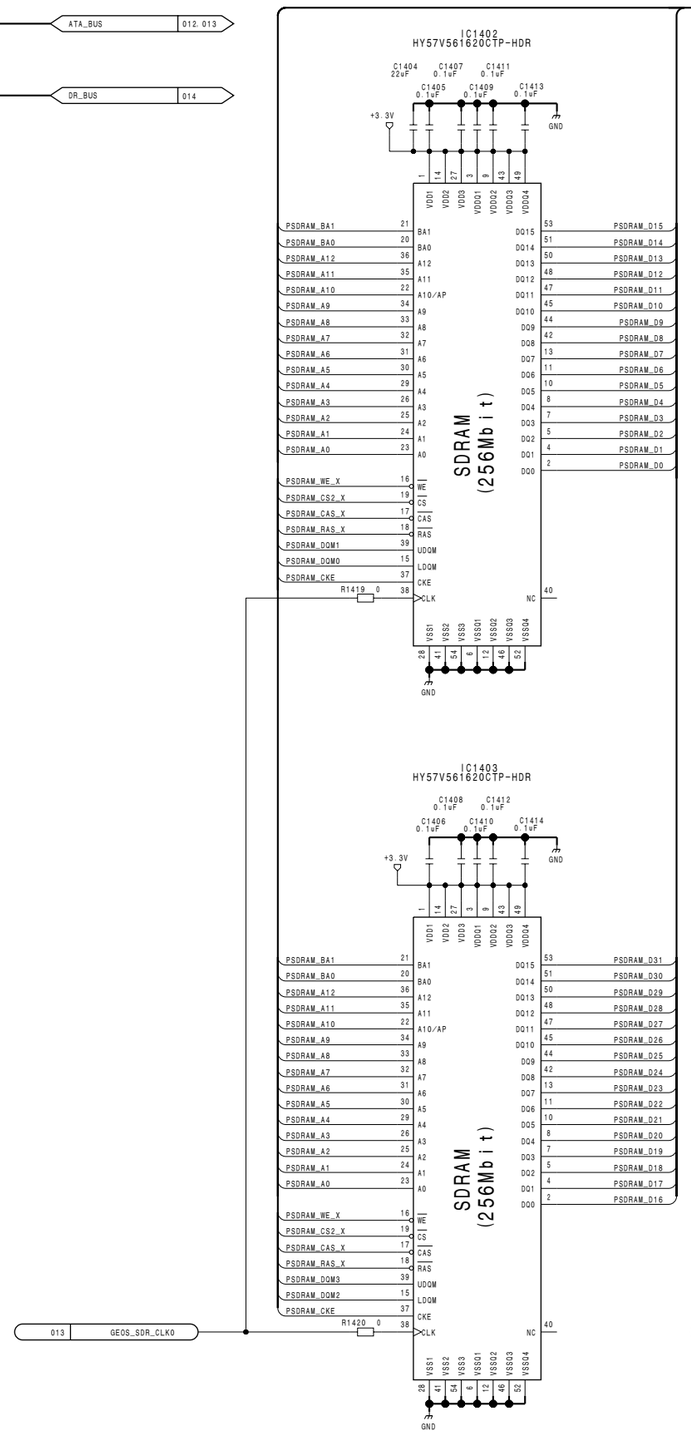

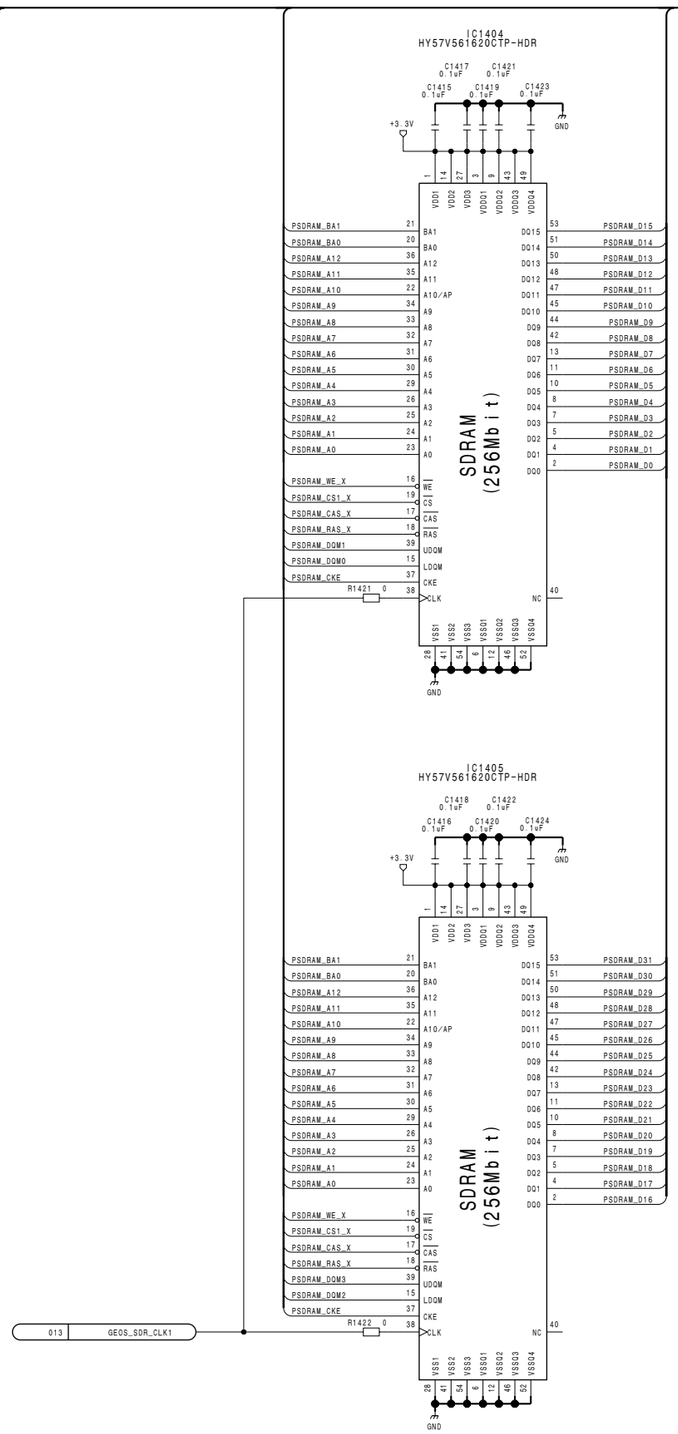

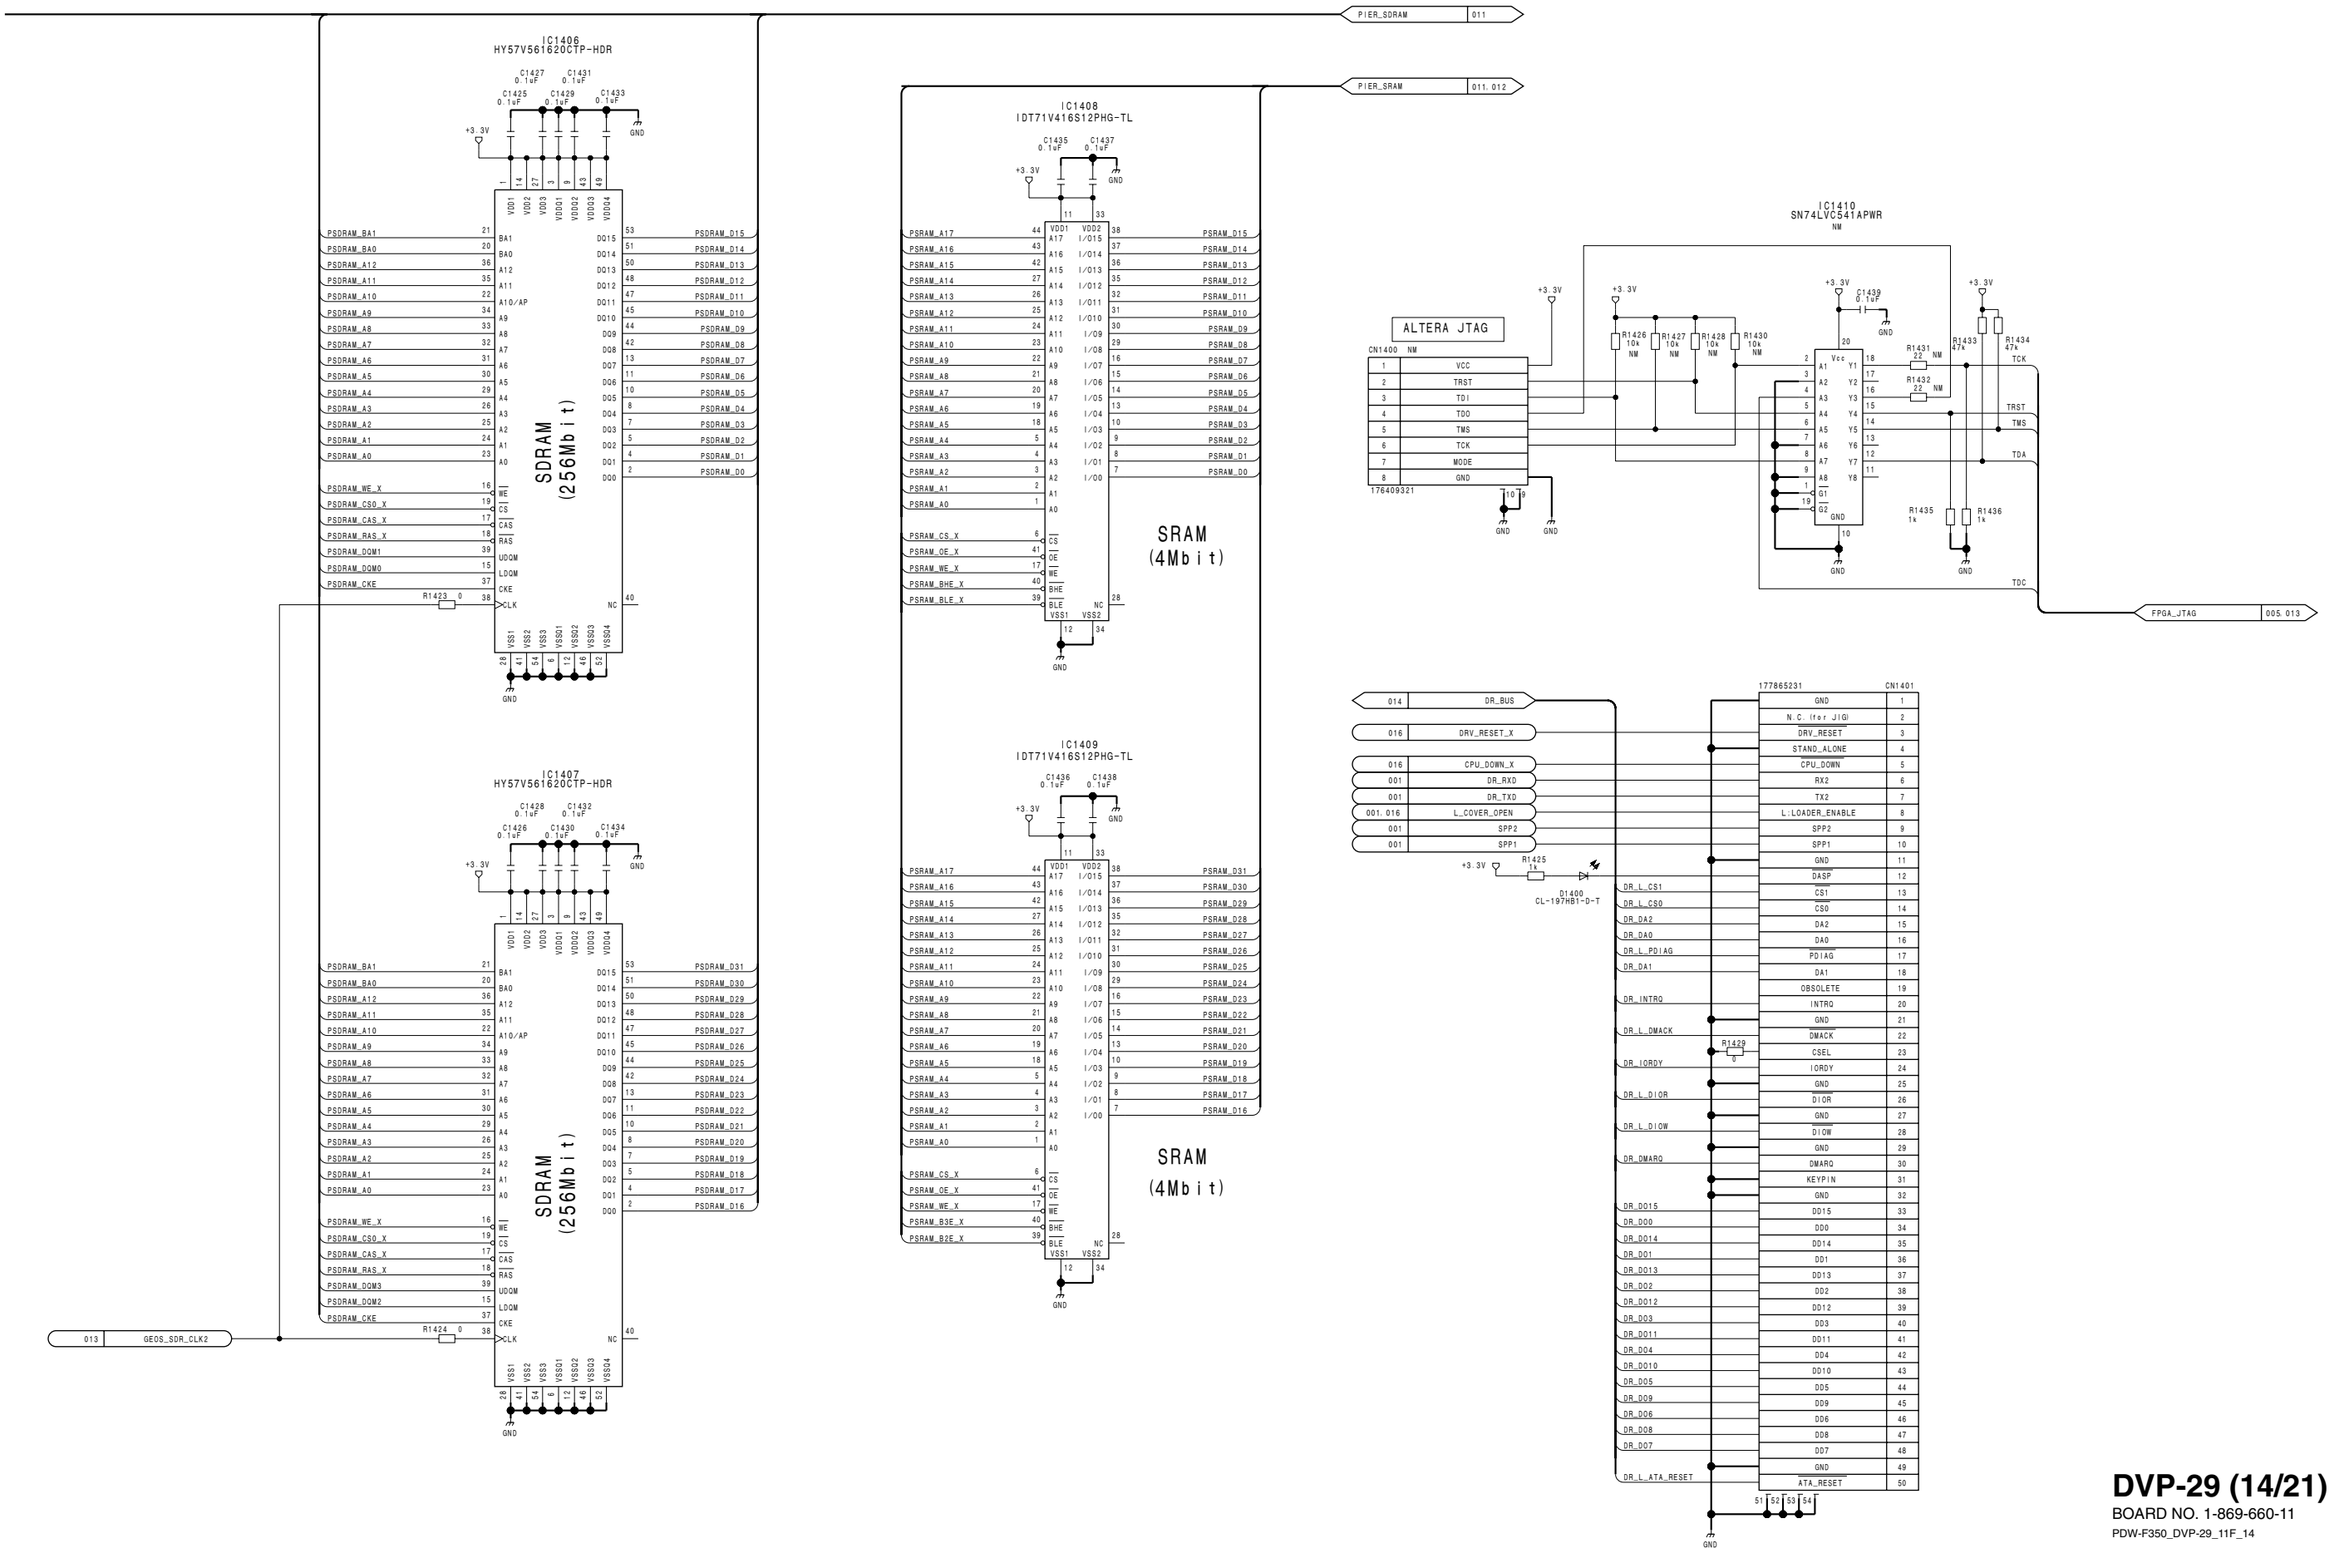

DVP-29 (14/21)
BOARD NO. 1-869-660-11
PDW-F350_DVP-29_11F_14

DVP-29 (15/21)
SUFFIX: -11

1

2

3

4

5

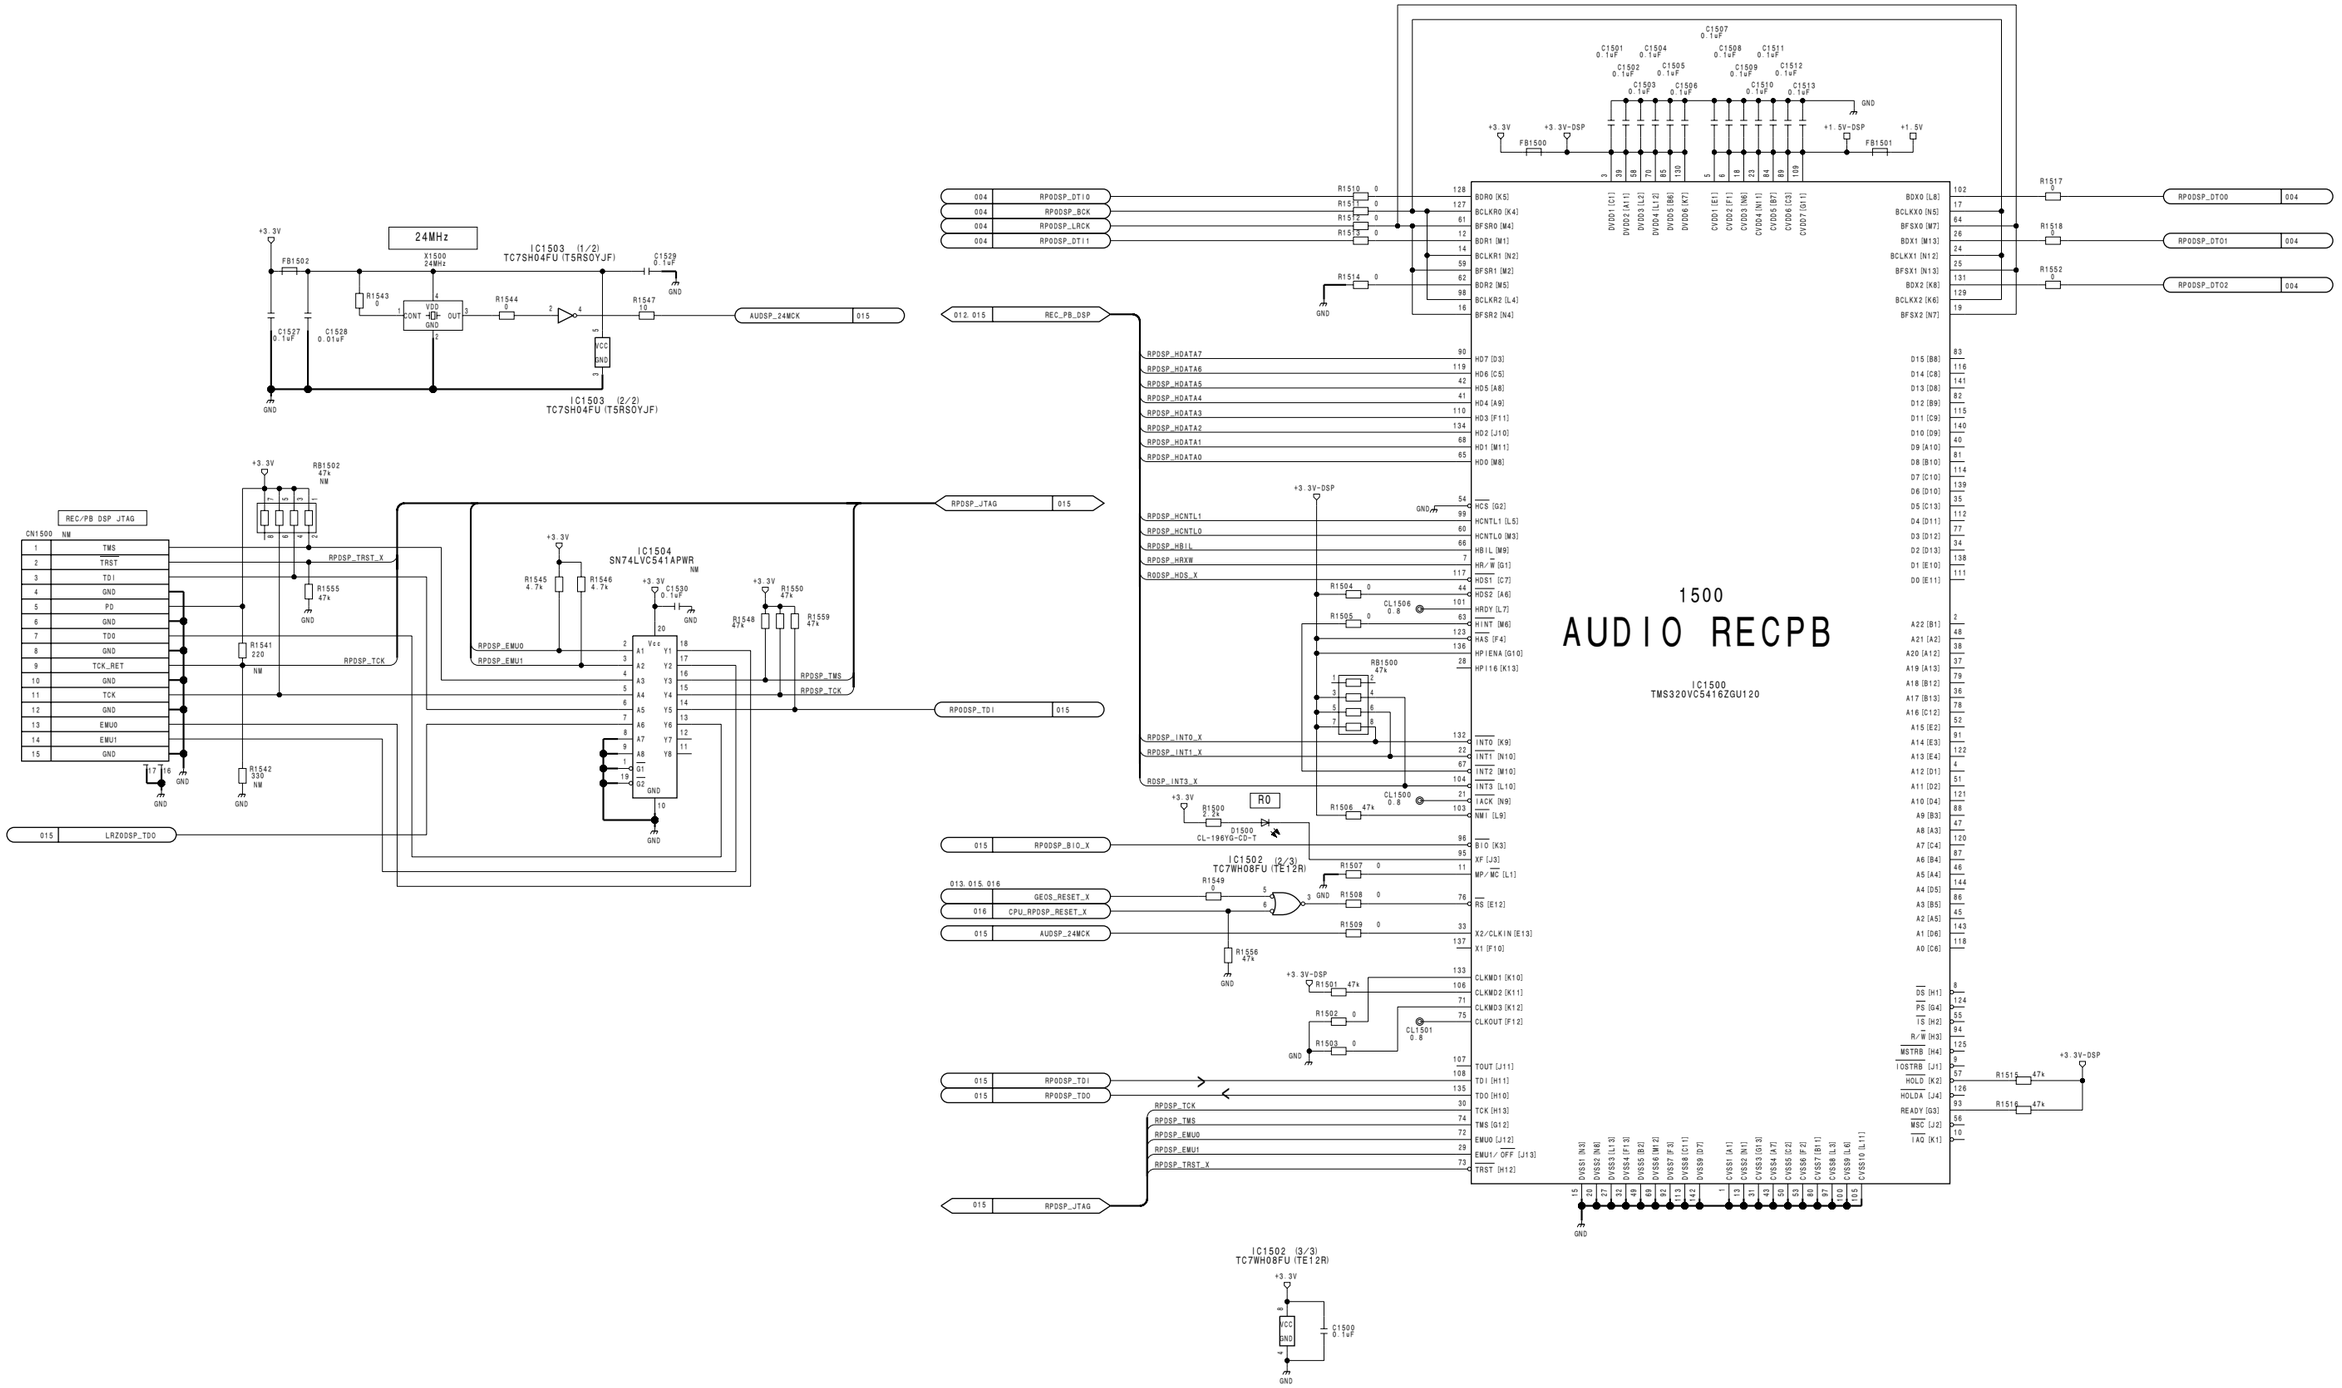

4-78

A B C D E F G H

DVP-29 (15/21)
SUFFIX: -11

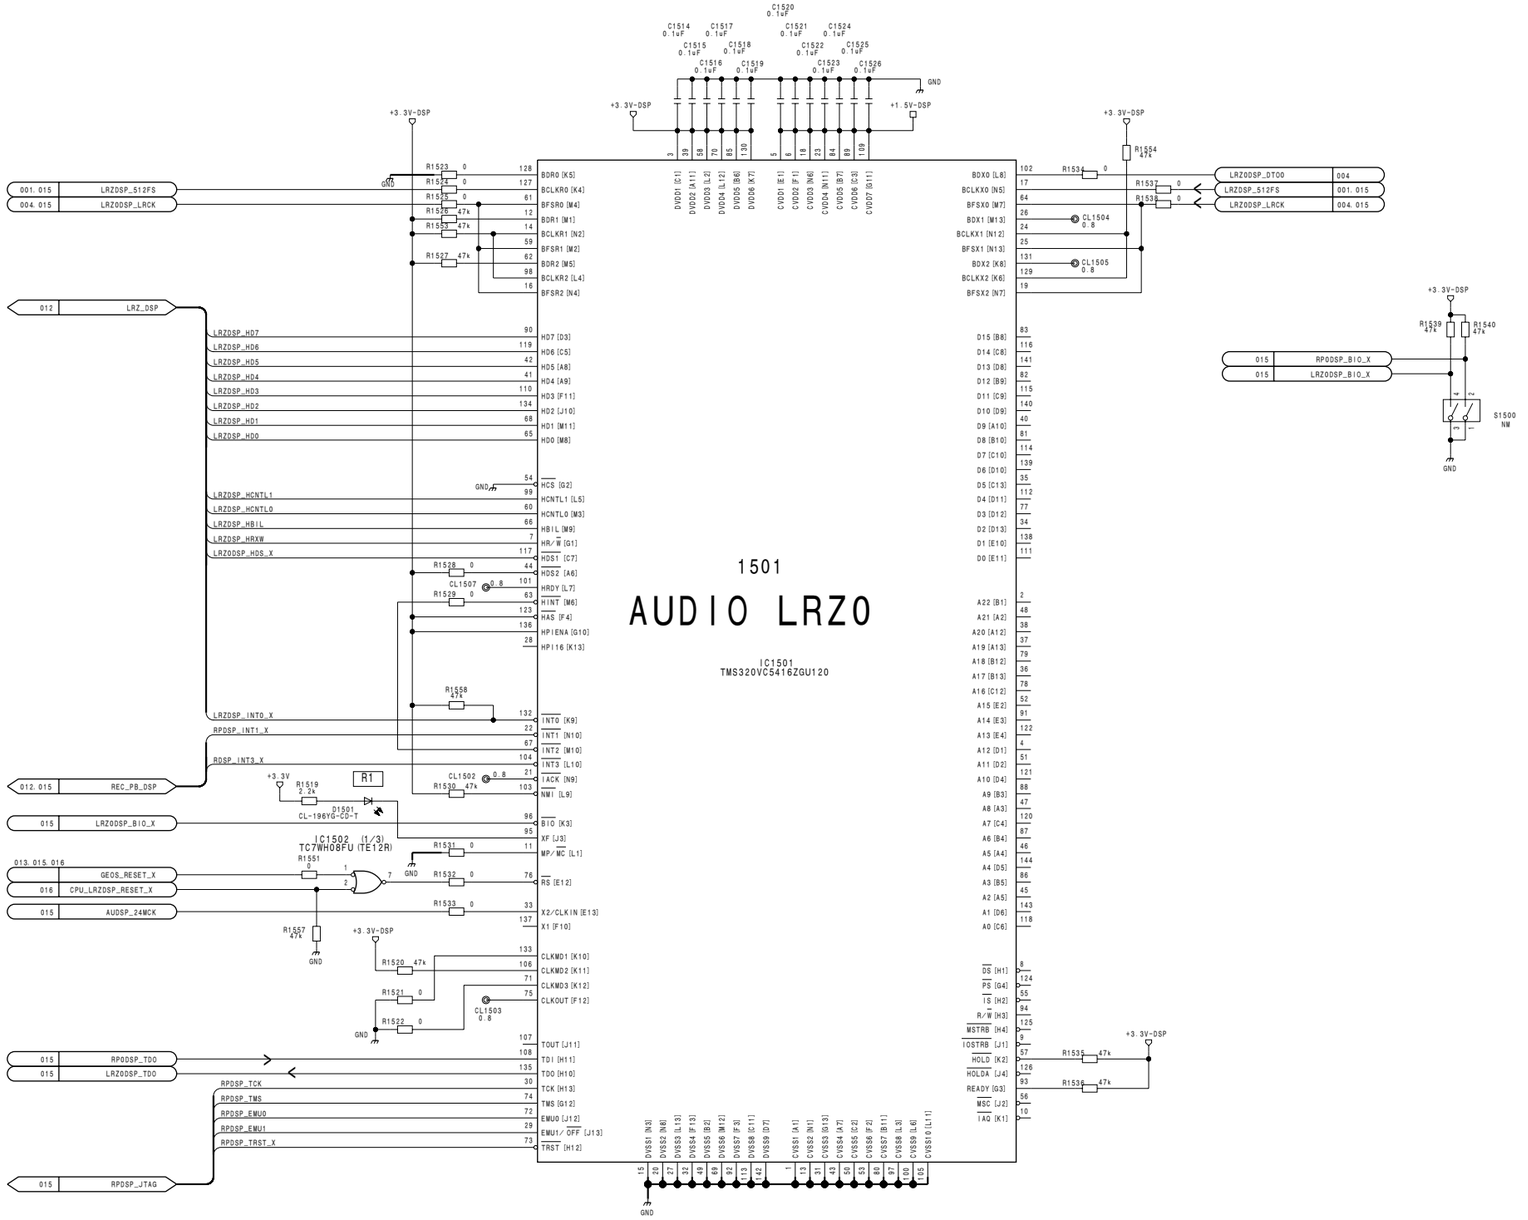

4-79

DVP-29 (15/21)
BOARD NO. 1-869-660-11
PDW-F350_DVP-29_11F_15

DVP-29 (16/21)
SUFFIX: -11

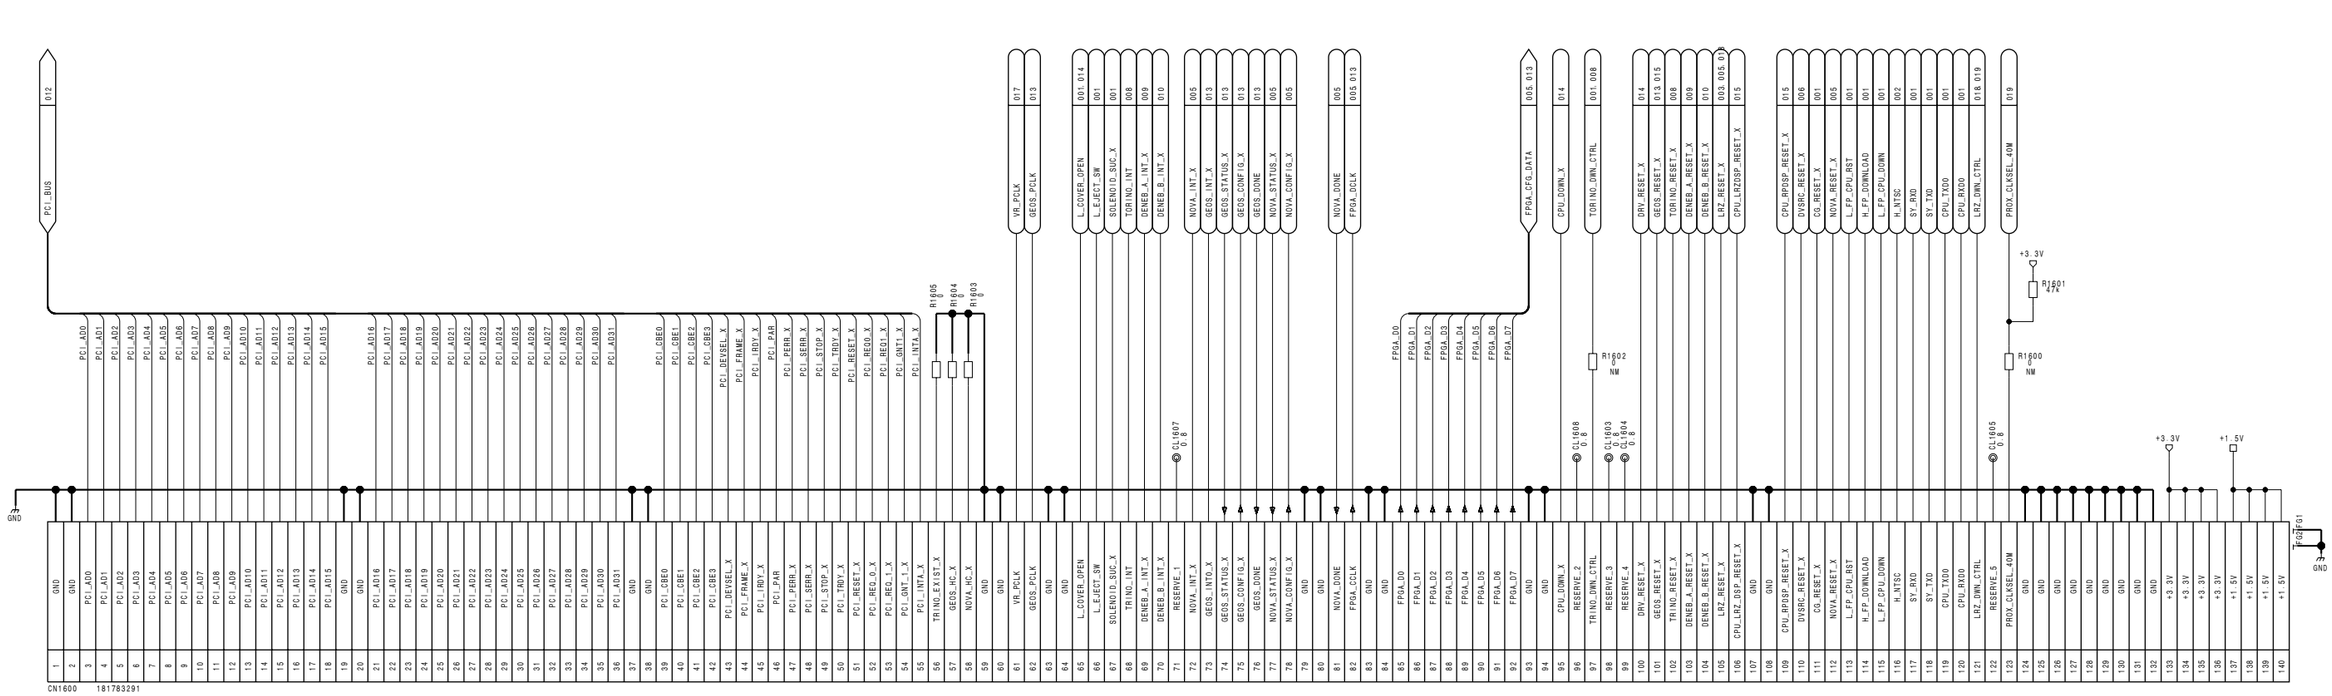

DVP-29 (17/21)
SUFFIX: -11

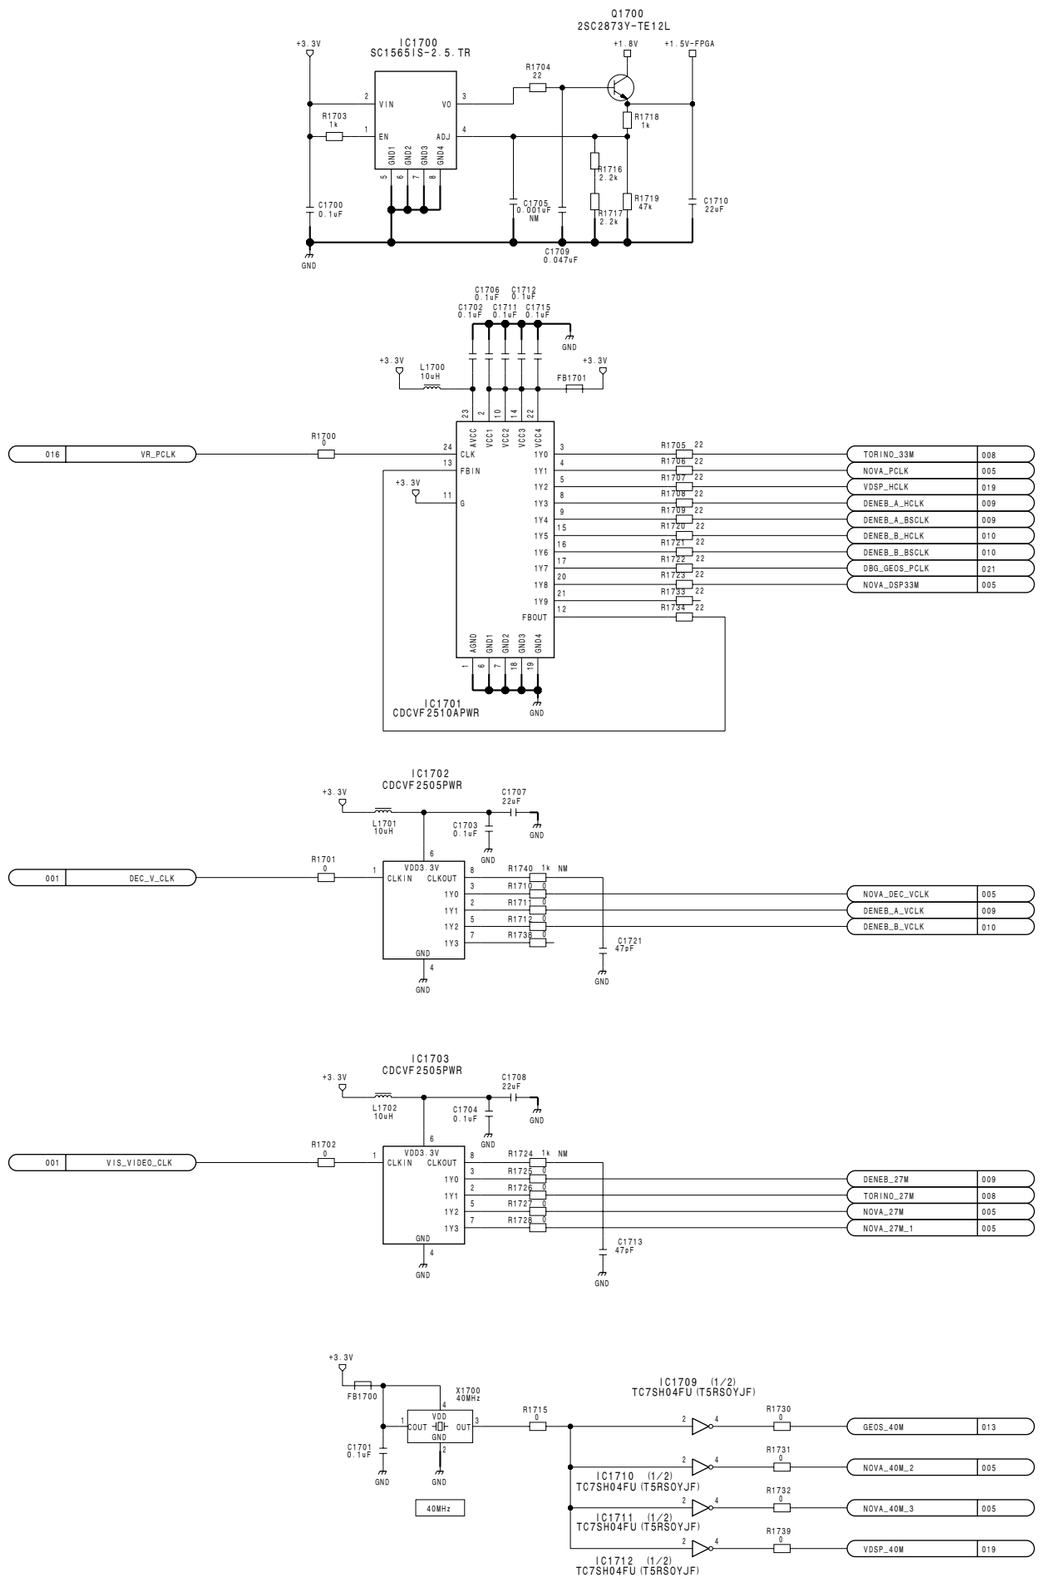

4-81

DVP-29 (17/21)
BOARD NO. 1-869-660-11
PDW-F350_DVP-29_11F_17

I J K L M N O P

DVP-29 (18/21)
SUFFIX: -11

DVP-29 (18/21)
SUFFIX: -11

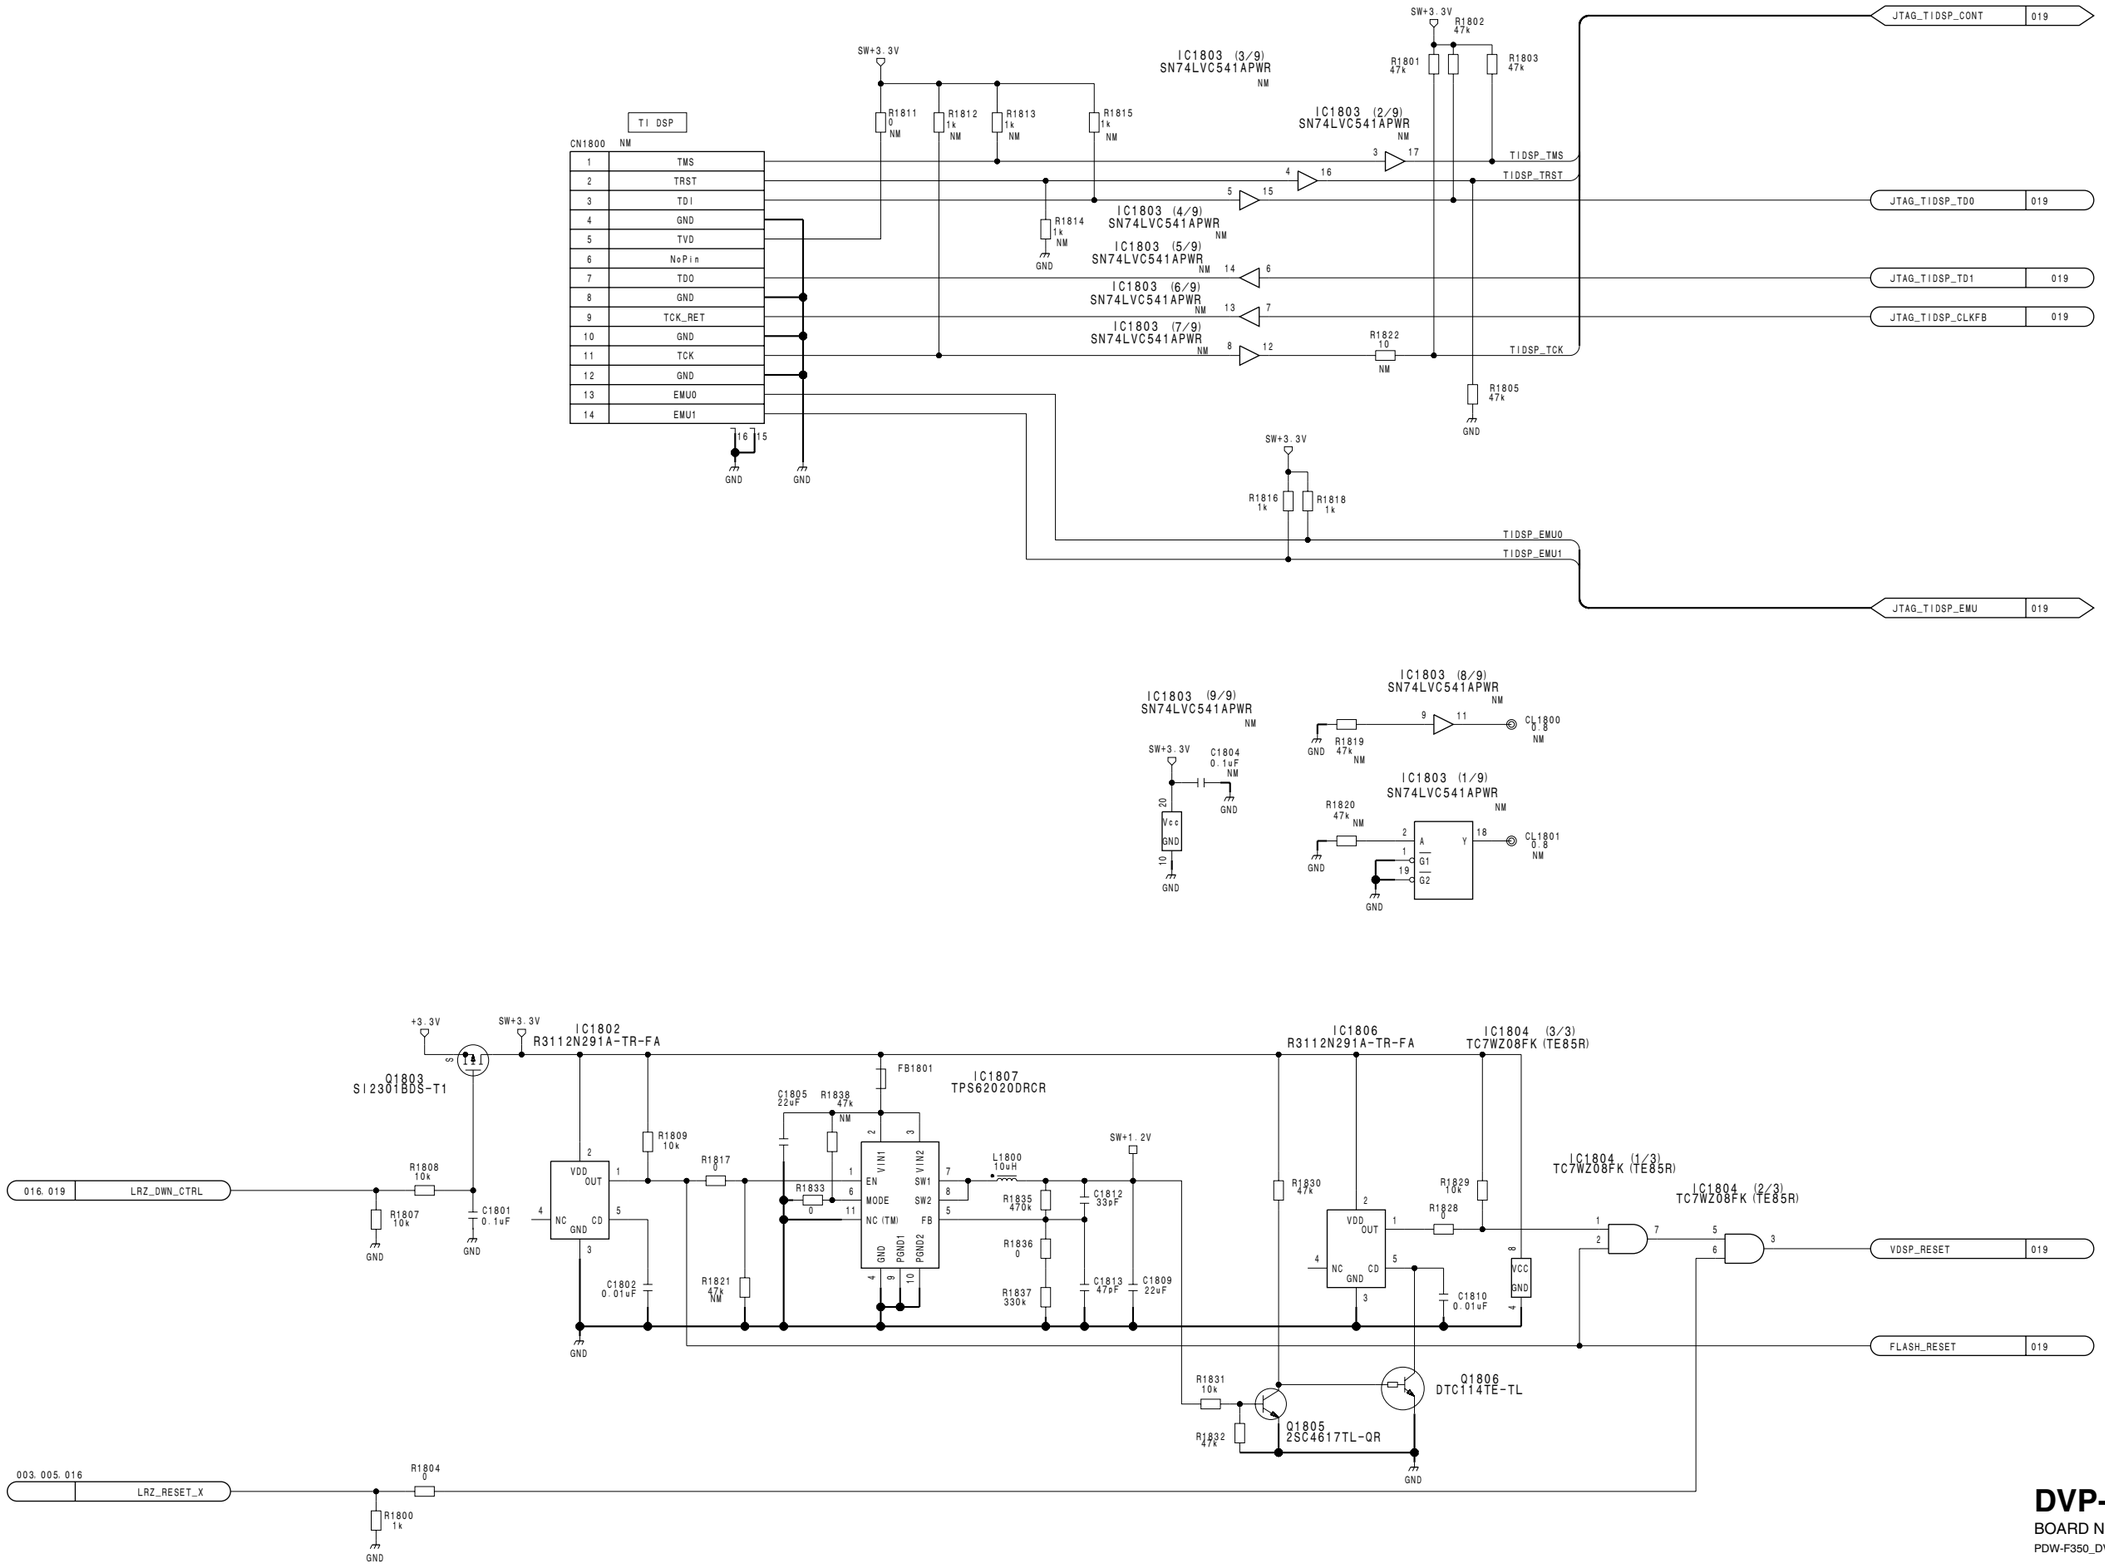

DVP-29 (18/21)
BOARD NO. 1-869-660-11
PDW-F350_DVP-29_11F_18

DVP-29 (19/21) **SUFFIX: -11**

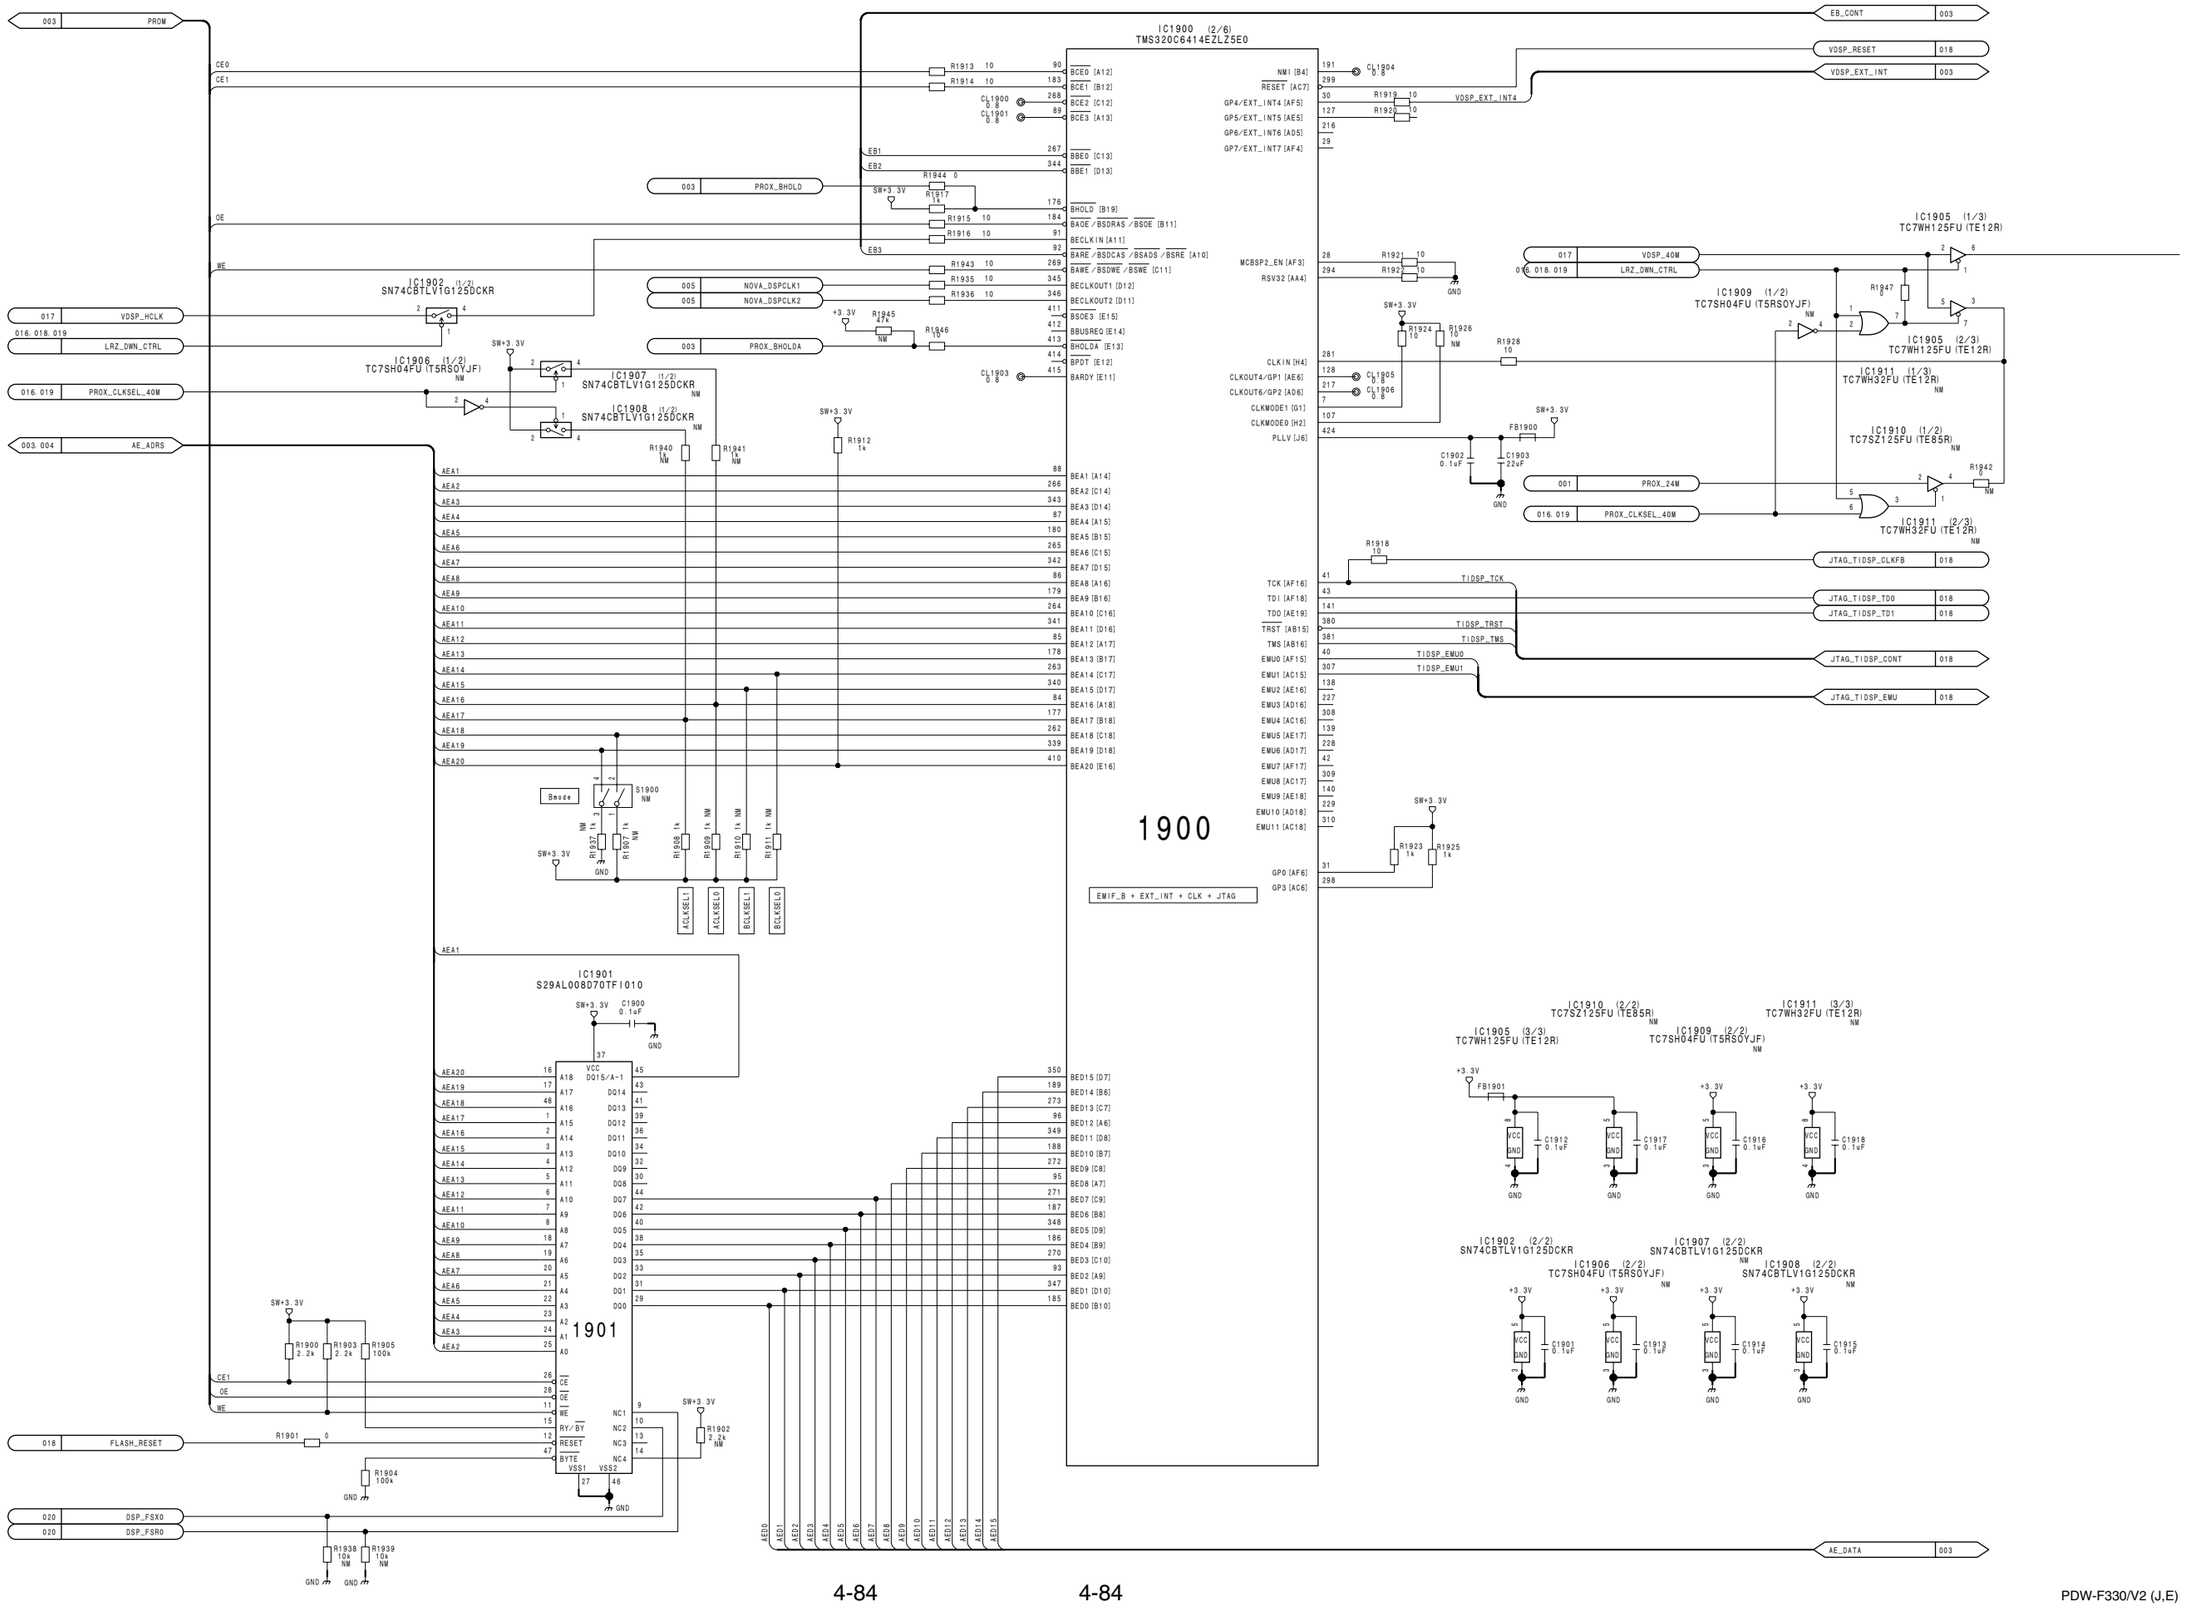

4-84

PDW-F330/V2 (J,E)

DVP-29 (19/21)
SUFFIX: -11

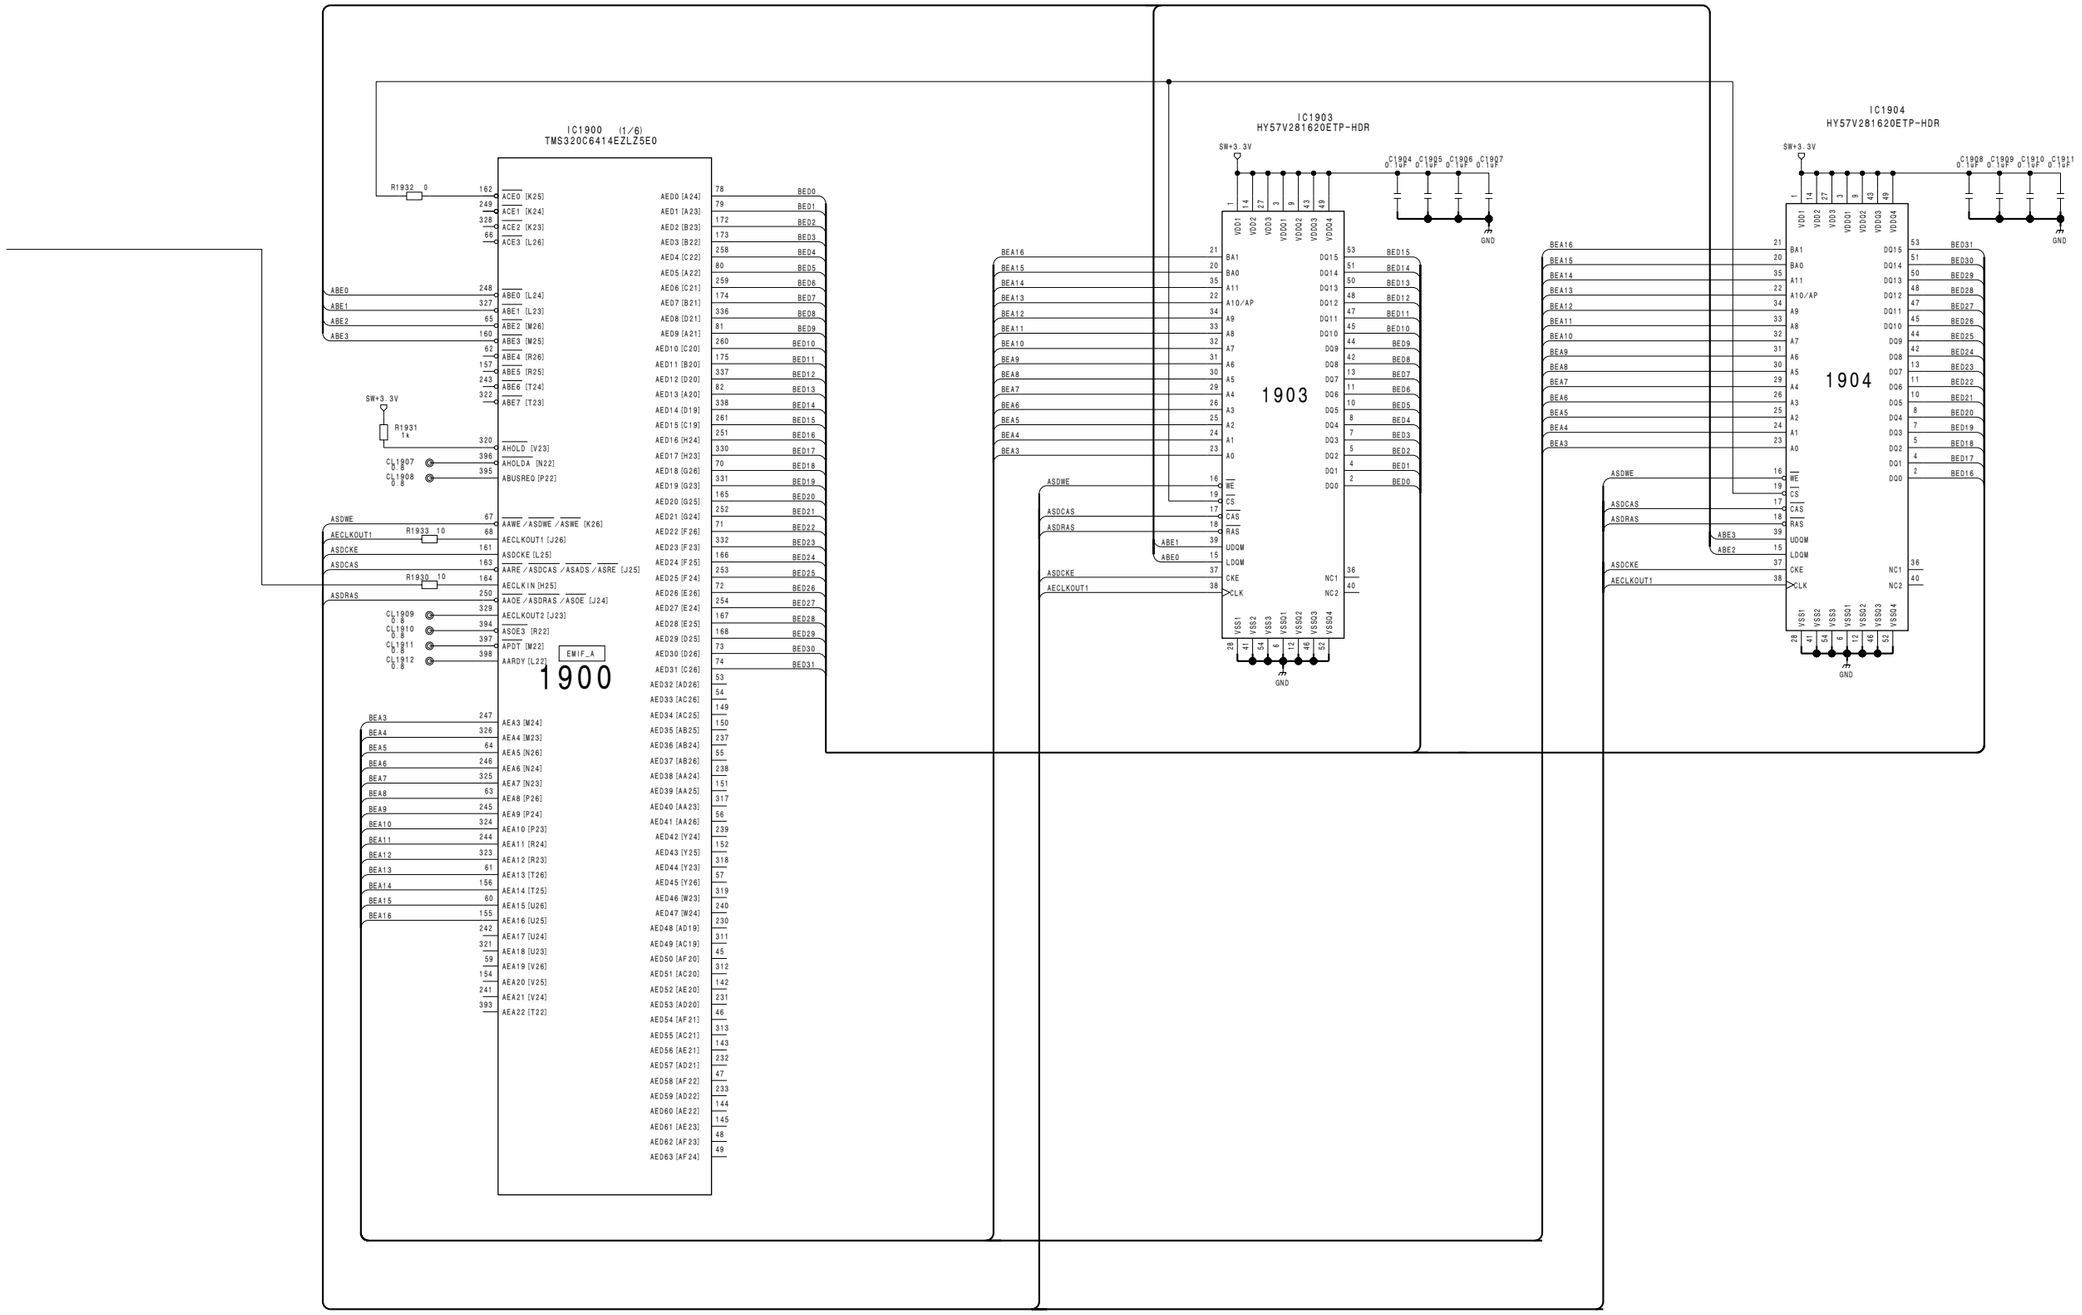

DVP-29 (20/21)
SUFFIX: -11

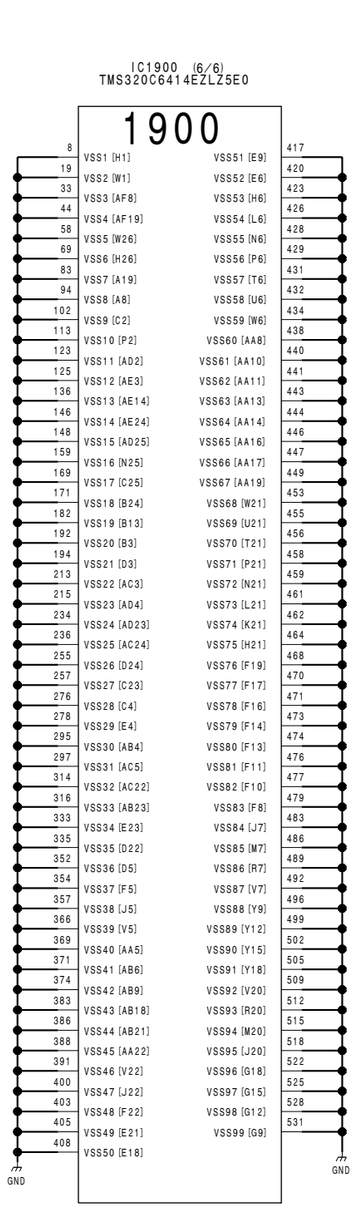

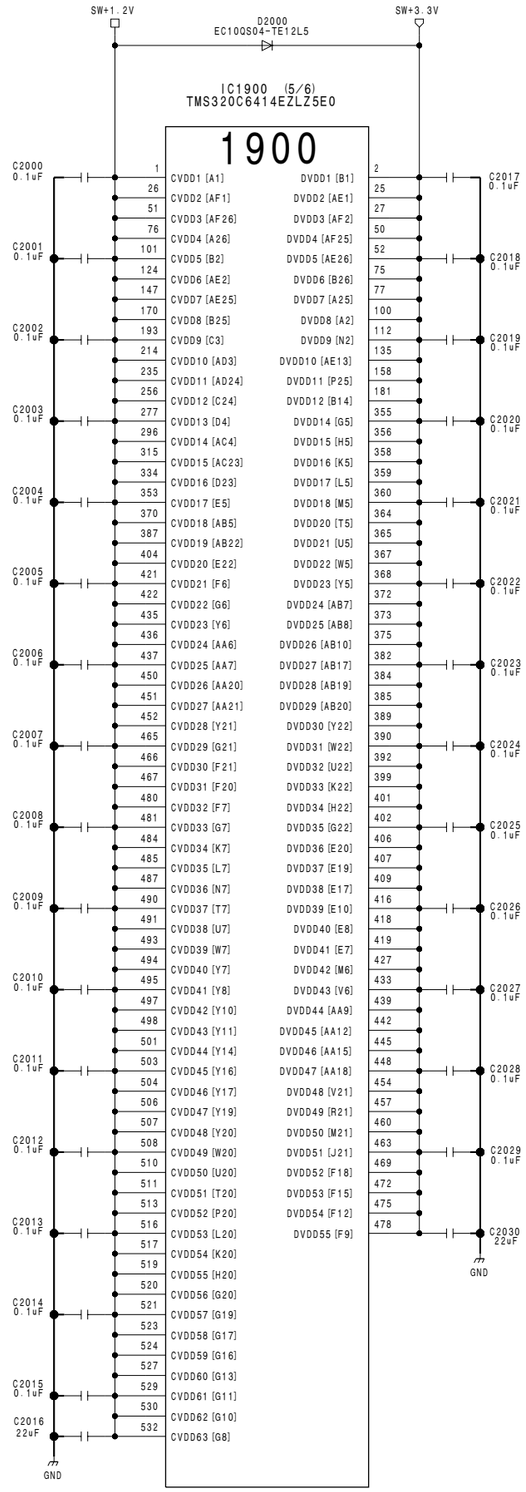

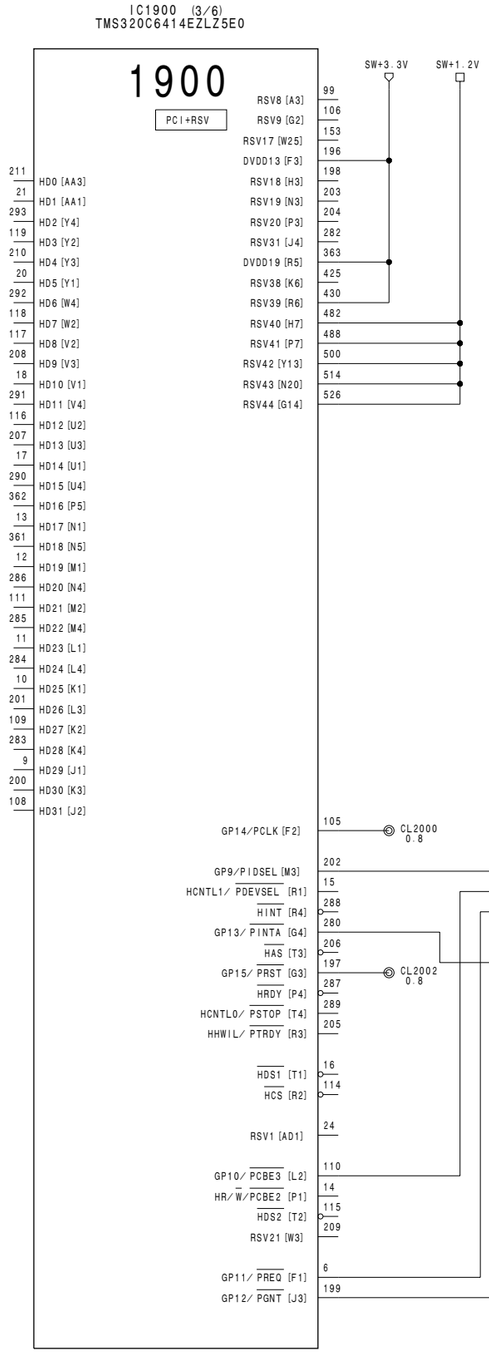

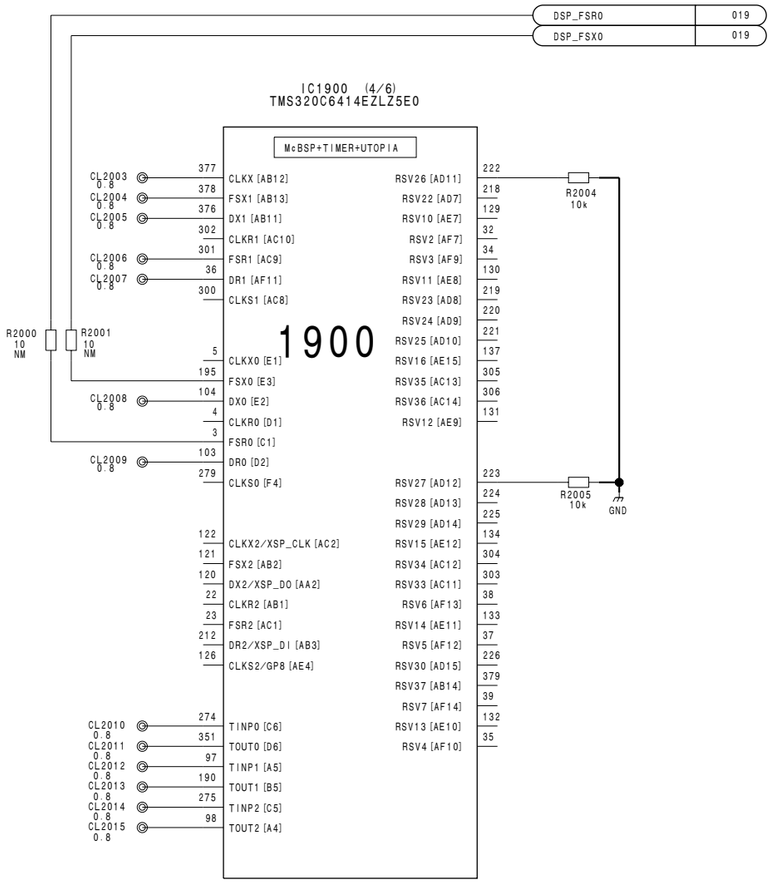

4-86

DVP-29 (20/21)
BOARD NO. 1-869-660-11
PDW-F350_DVP-29_11F_20

PDW-F330/V2 (J,E)

DU-398, DVP-29 (21/21), ENC-100
SUFFIX: -11 SUFFIX: -11 SUFFIX: -11

NOVA MON

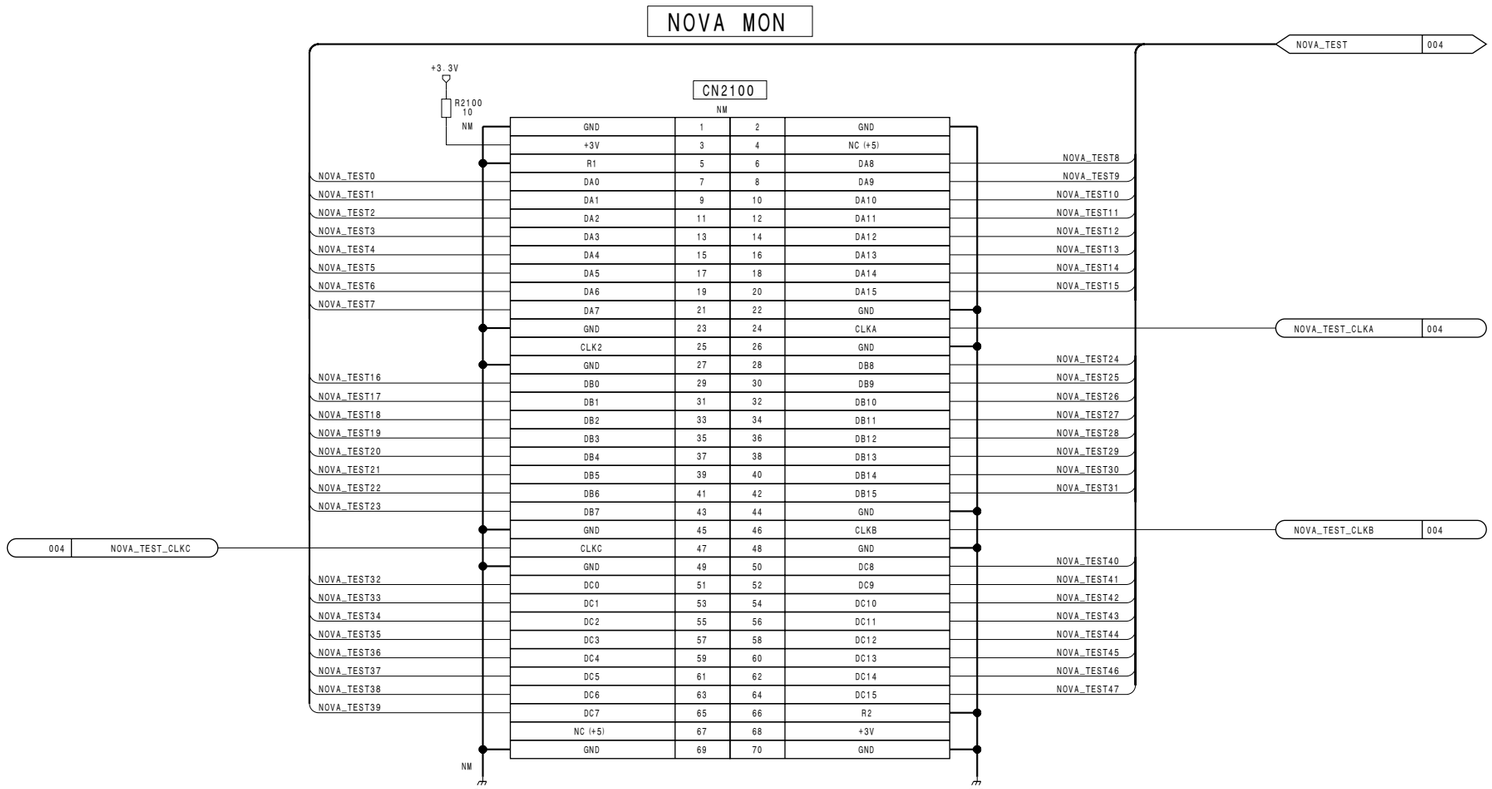

GEOS MON

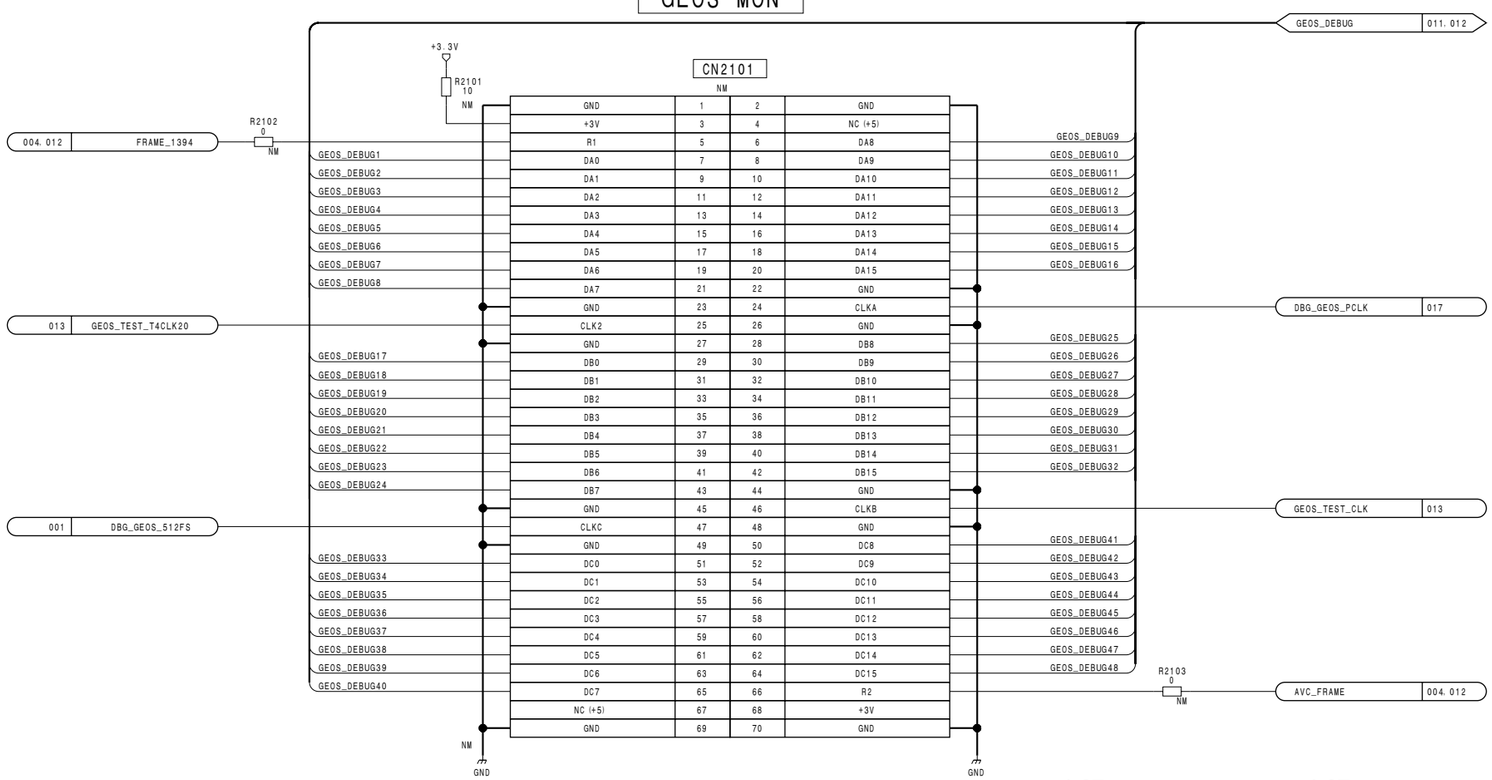

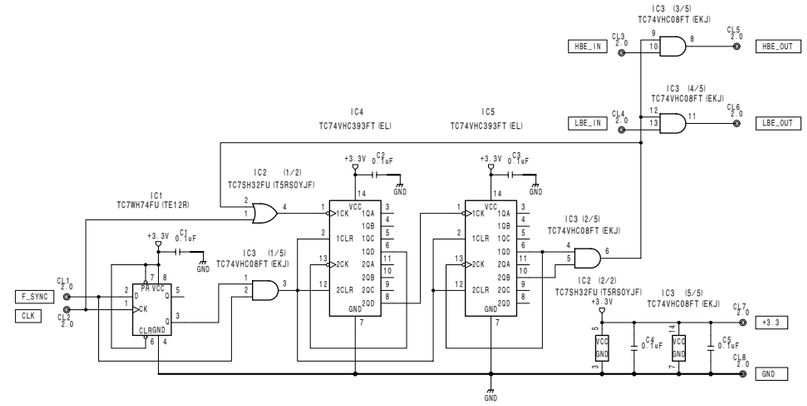

DU-398

BOARD NO. 1-870-892-11
PDW-F350_DU-398_1

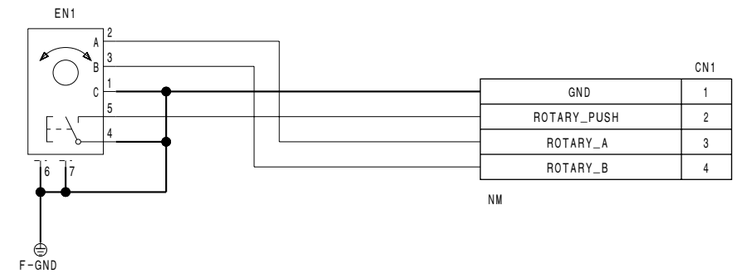

ENC-100

BOARD NO. 1-869-507-11
PDW-F330K_ENC-100_110_1

DVP-29 (21/21)

BOARD NO. 1-869-660-11
PDW-F350_DVP-29_11F_21

FP-144 (1/6) **SUFFIX: -11**

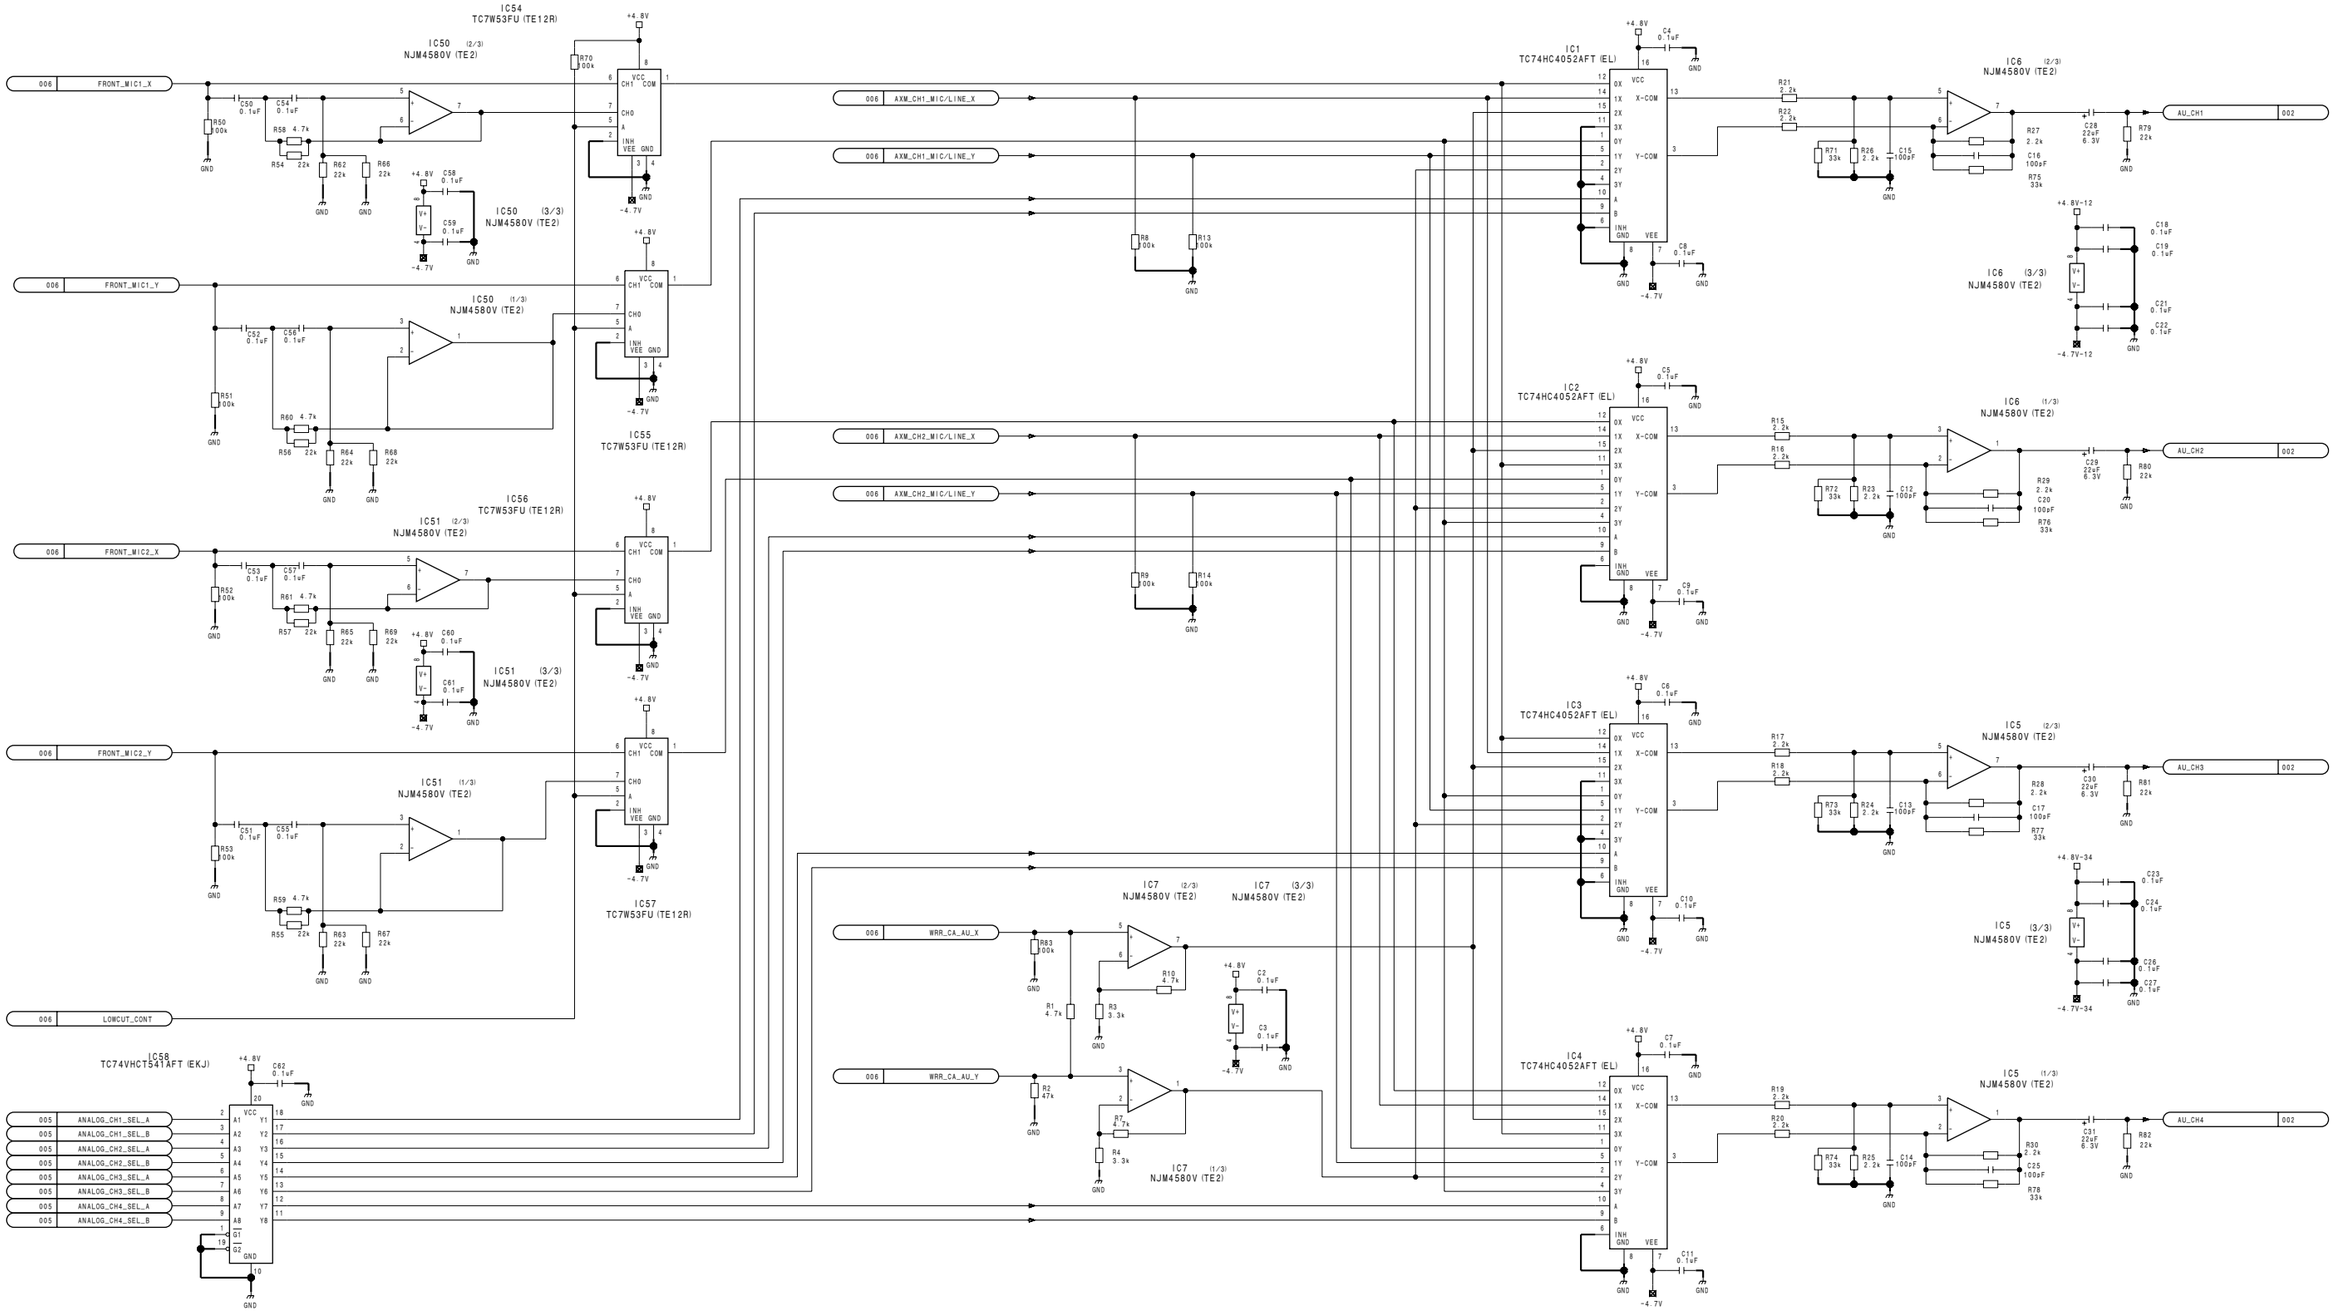

FP-144 (1/6)
BOARD NO. 1-869-661-11
PDW-F350_FP-144_11Q_1

FP-144 (2/6)
SUFFIX: -11

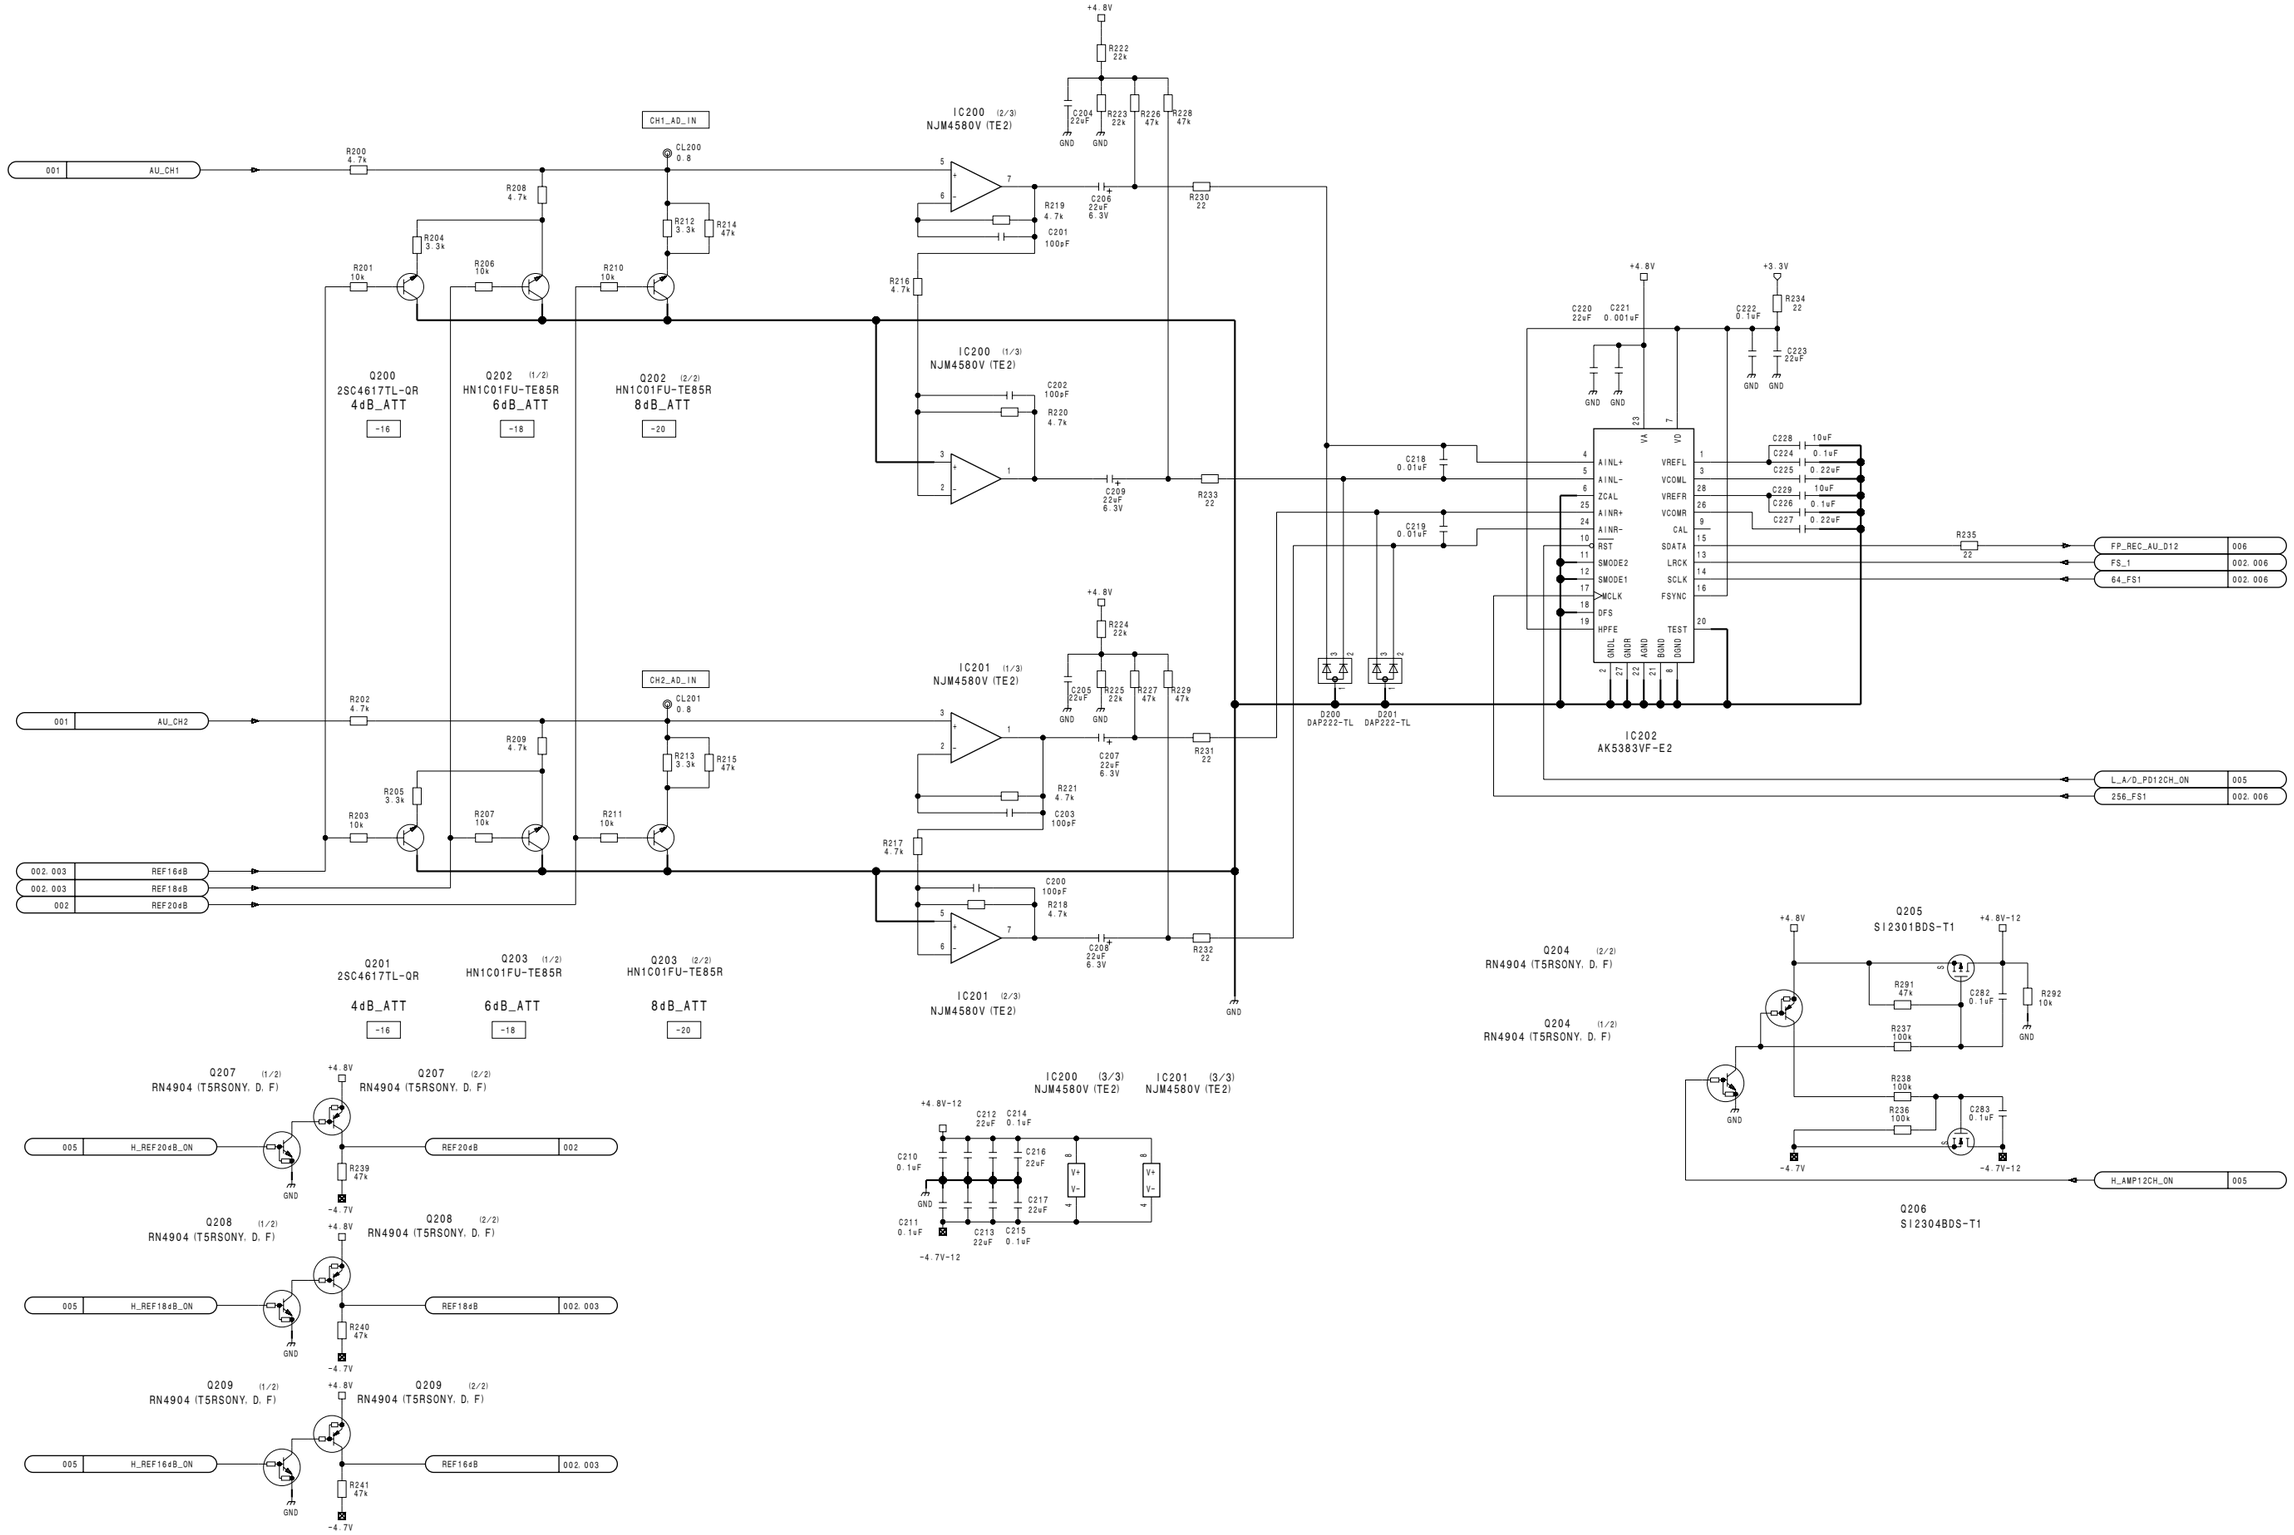

4-90

FP-144 (2/6)
SUFFIX: -11

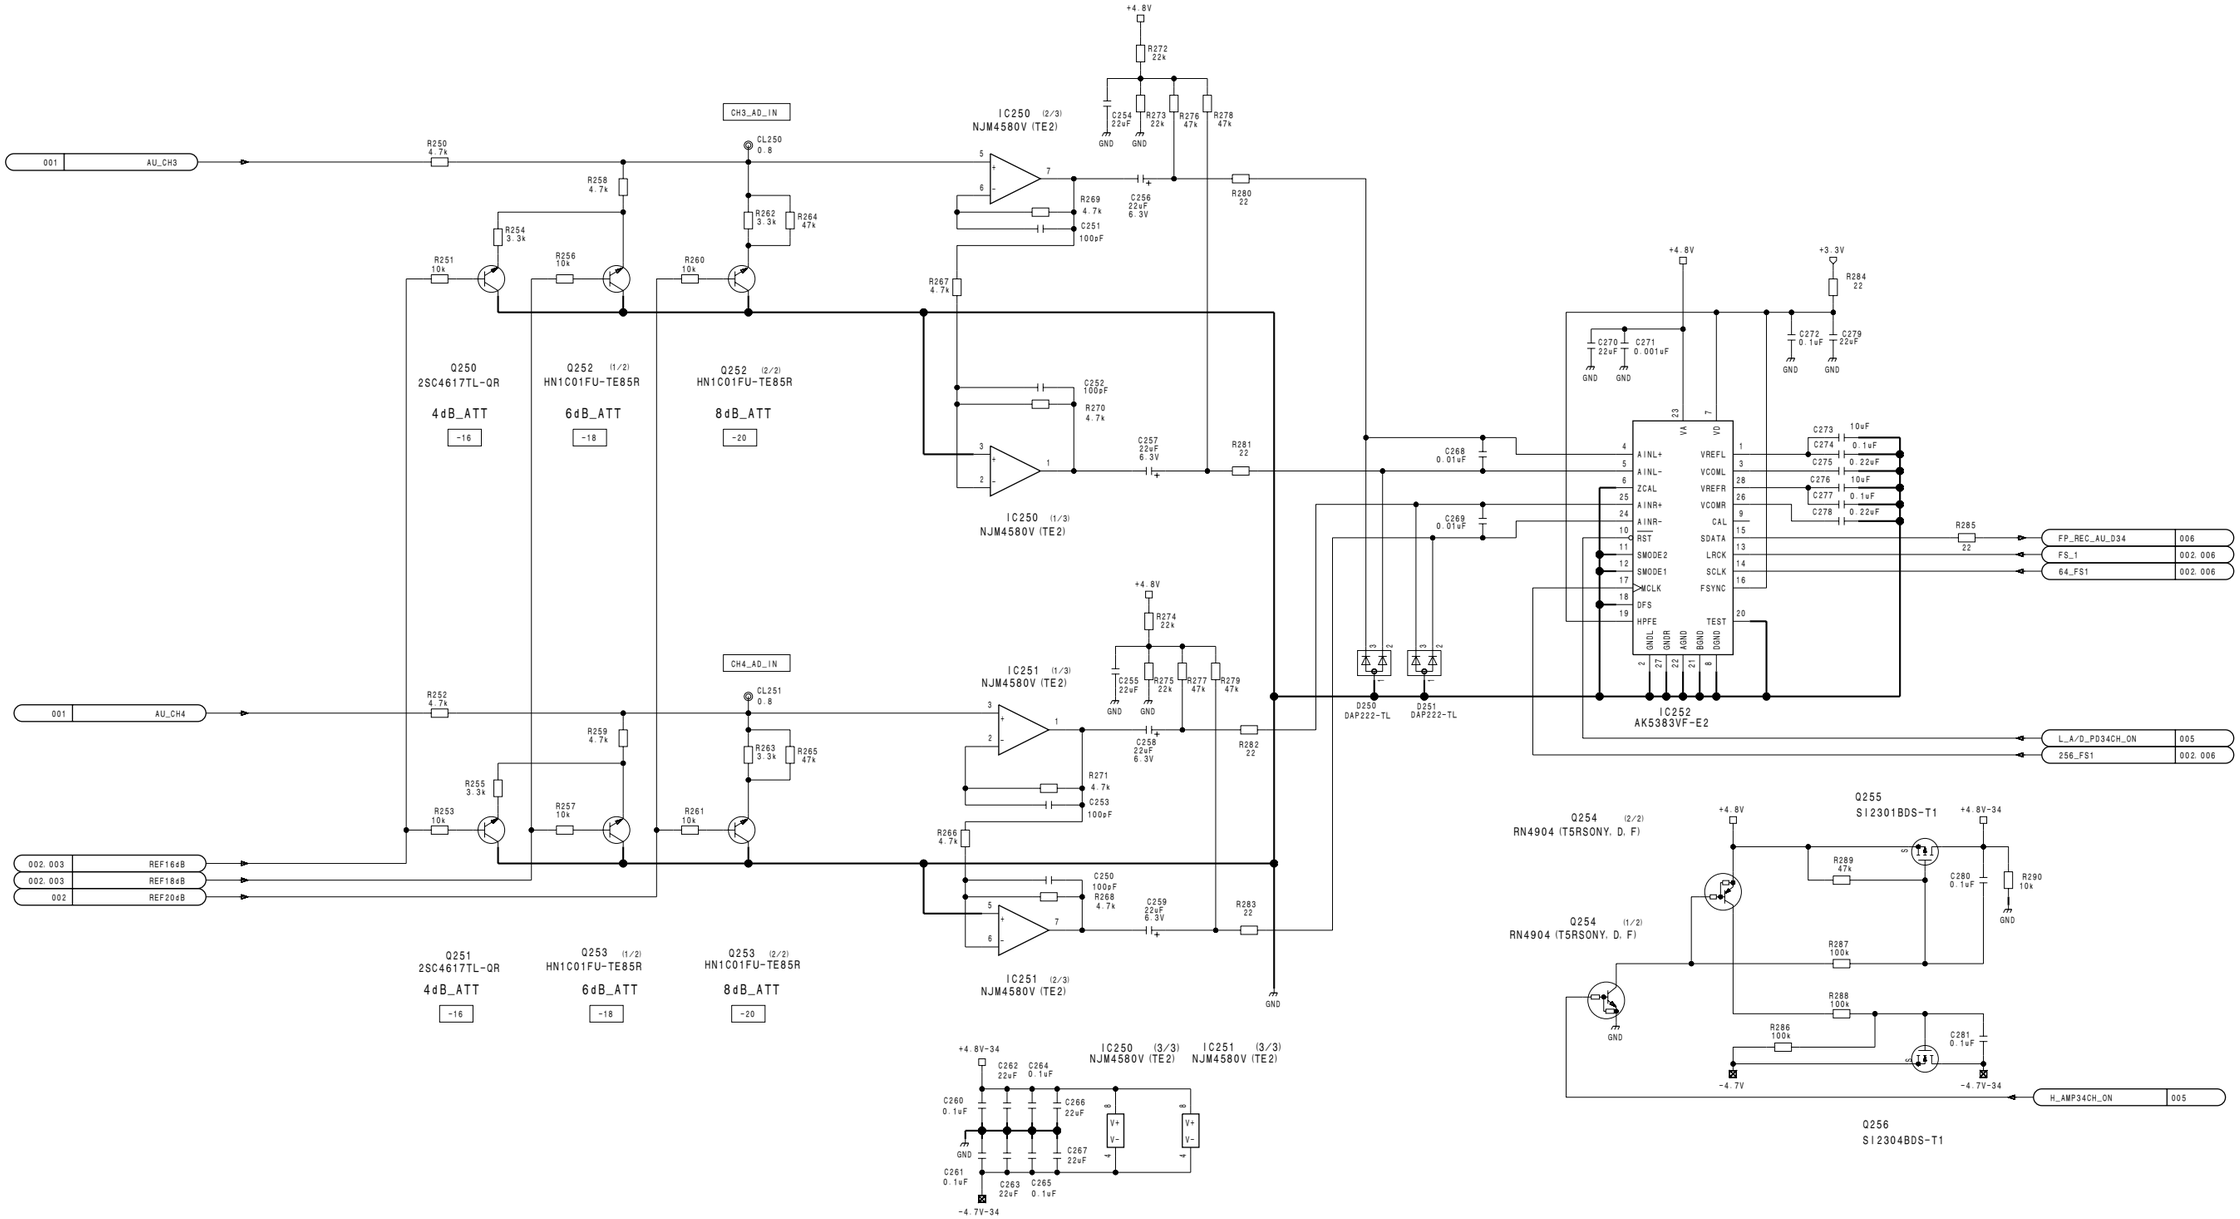

FP-144 (3/6)
SUFFIX: -11

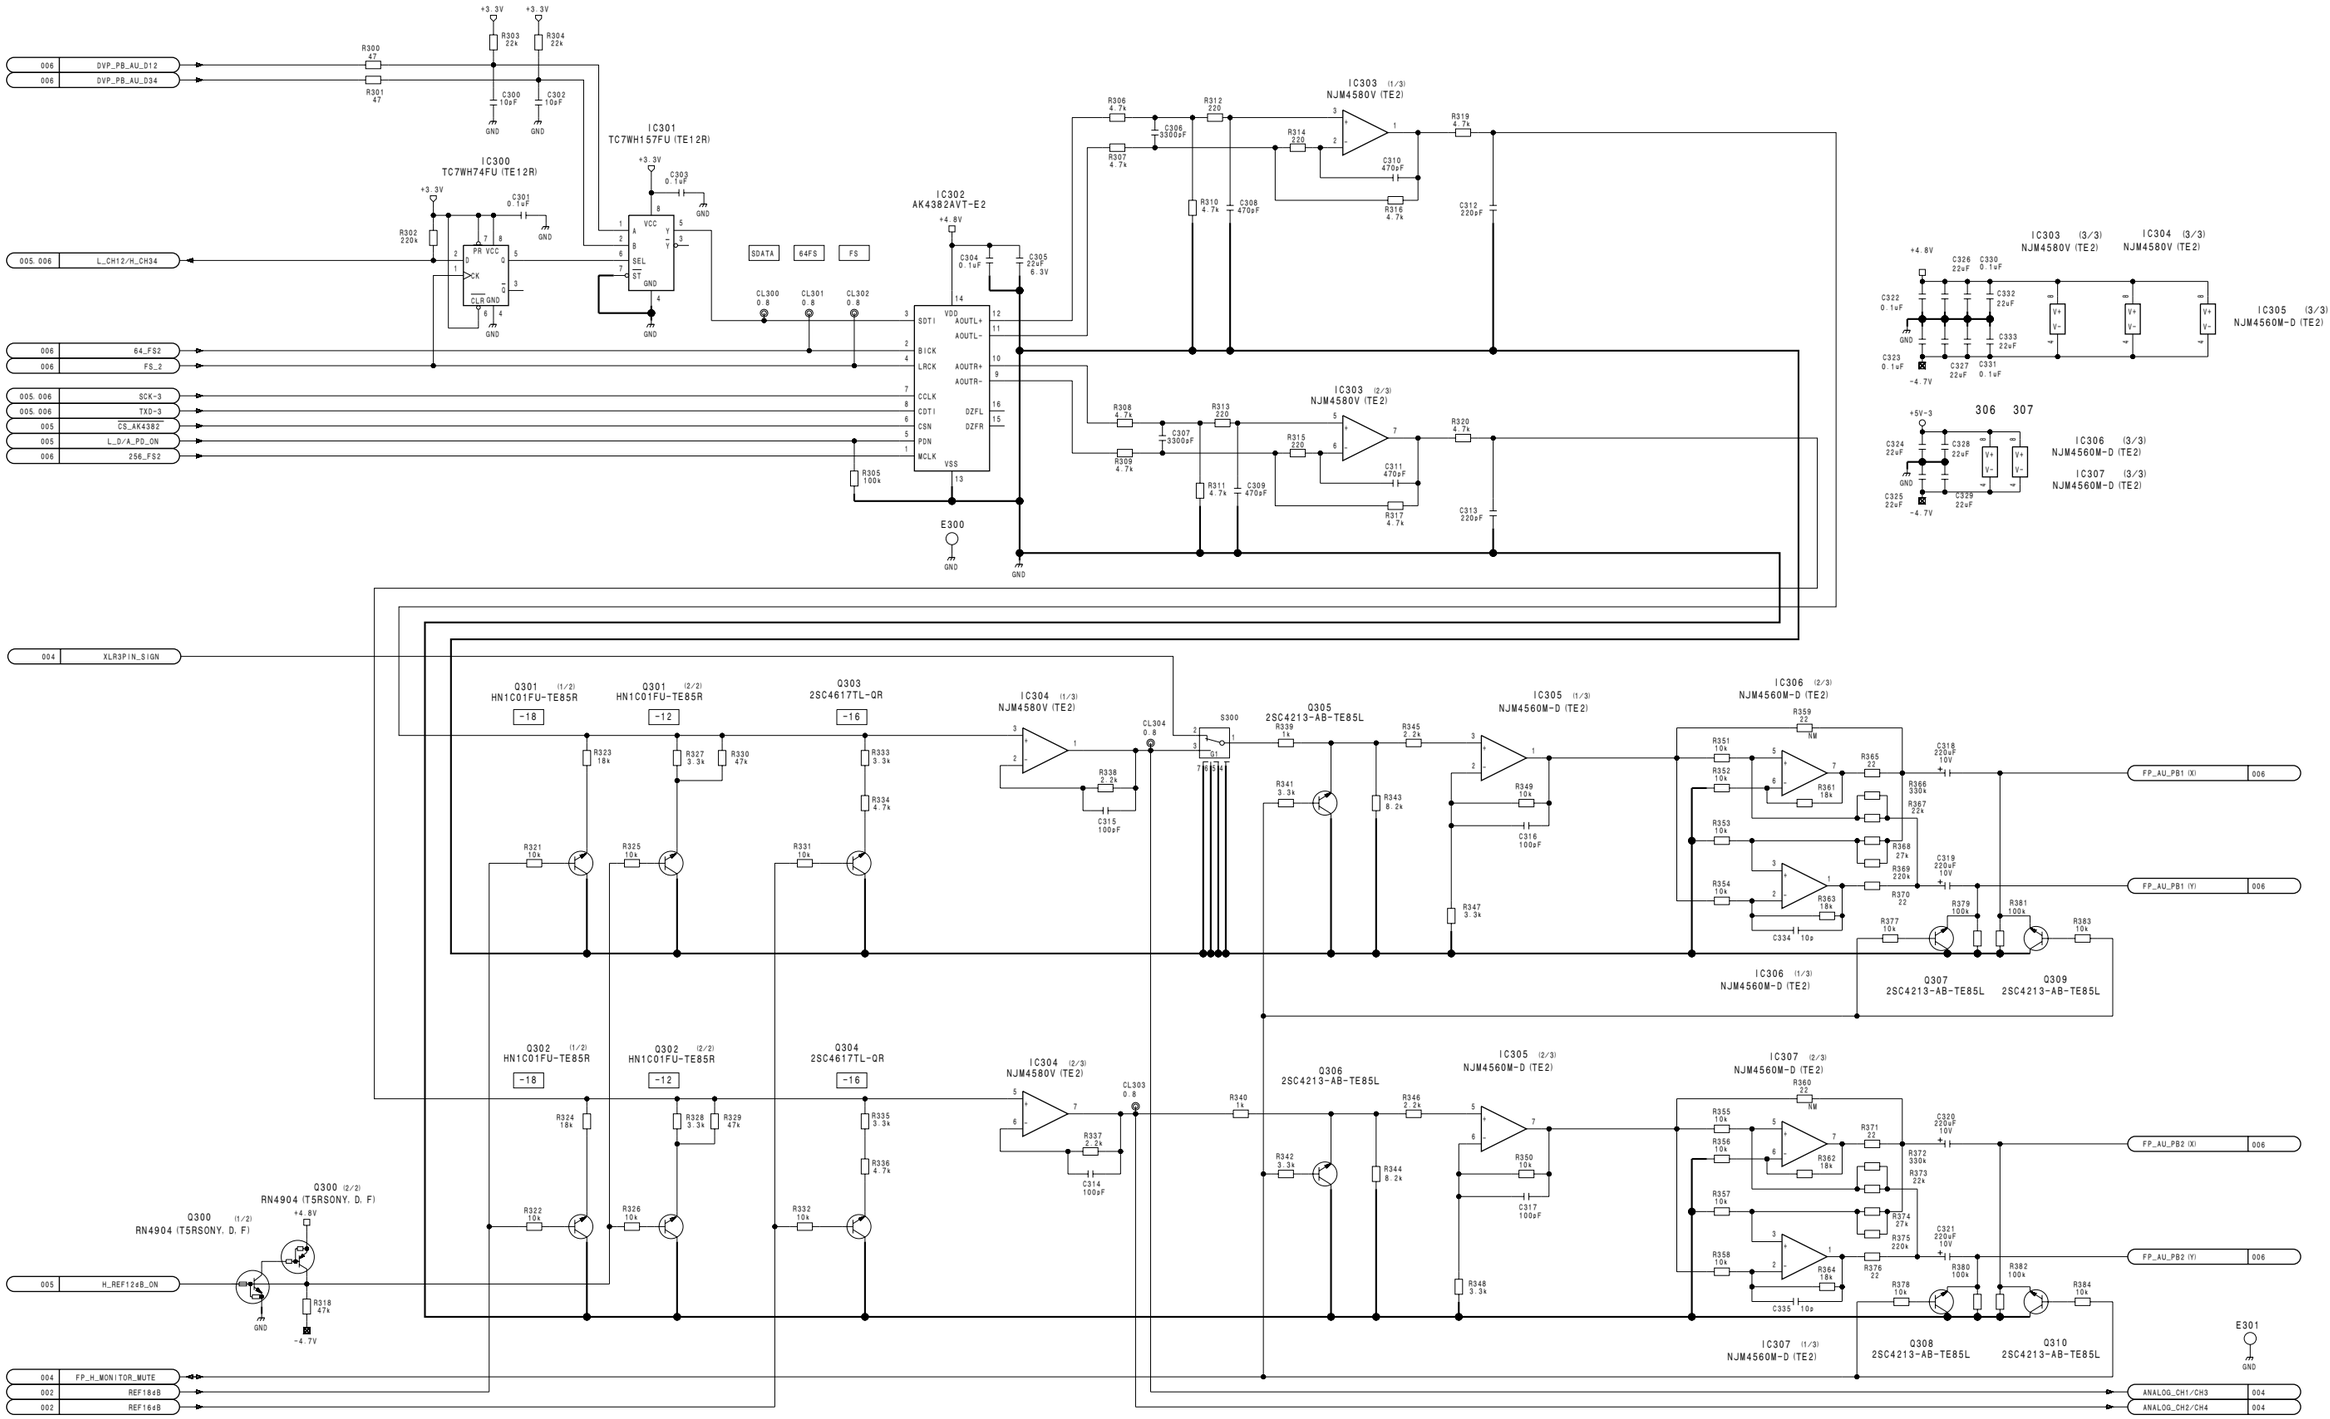

FP-144 (3/6)

BOARD NO. 1-869-661-11

PDW-F350_FP-144_11Q_3

FP-144 (4/6)
SUFFIX: -11

FP-144 (4/6)
SUFFIX: -11

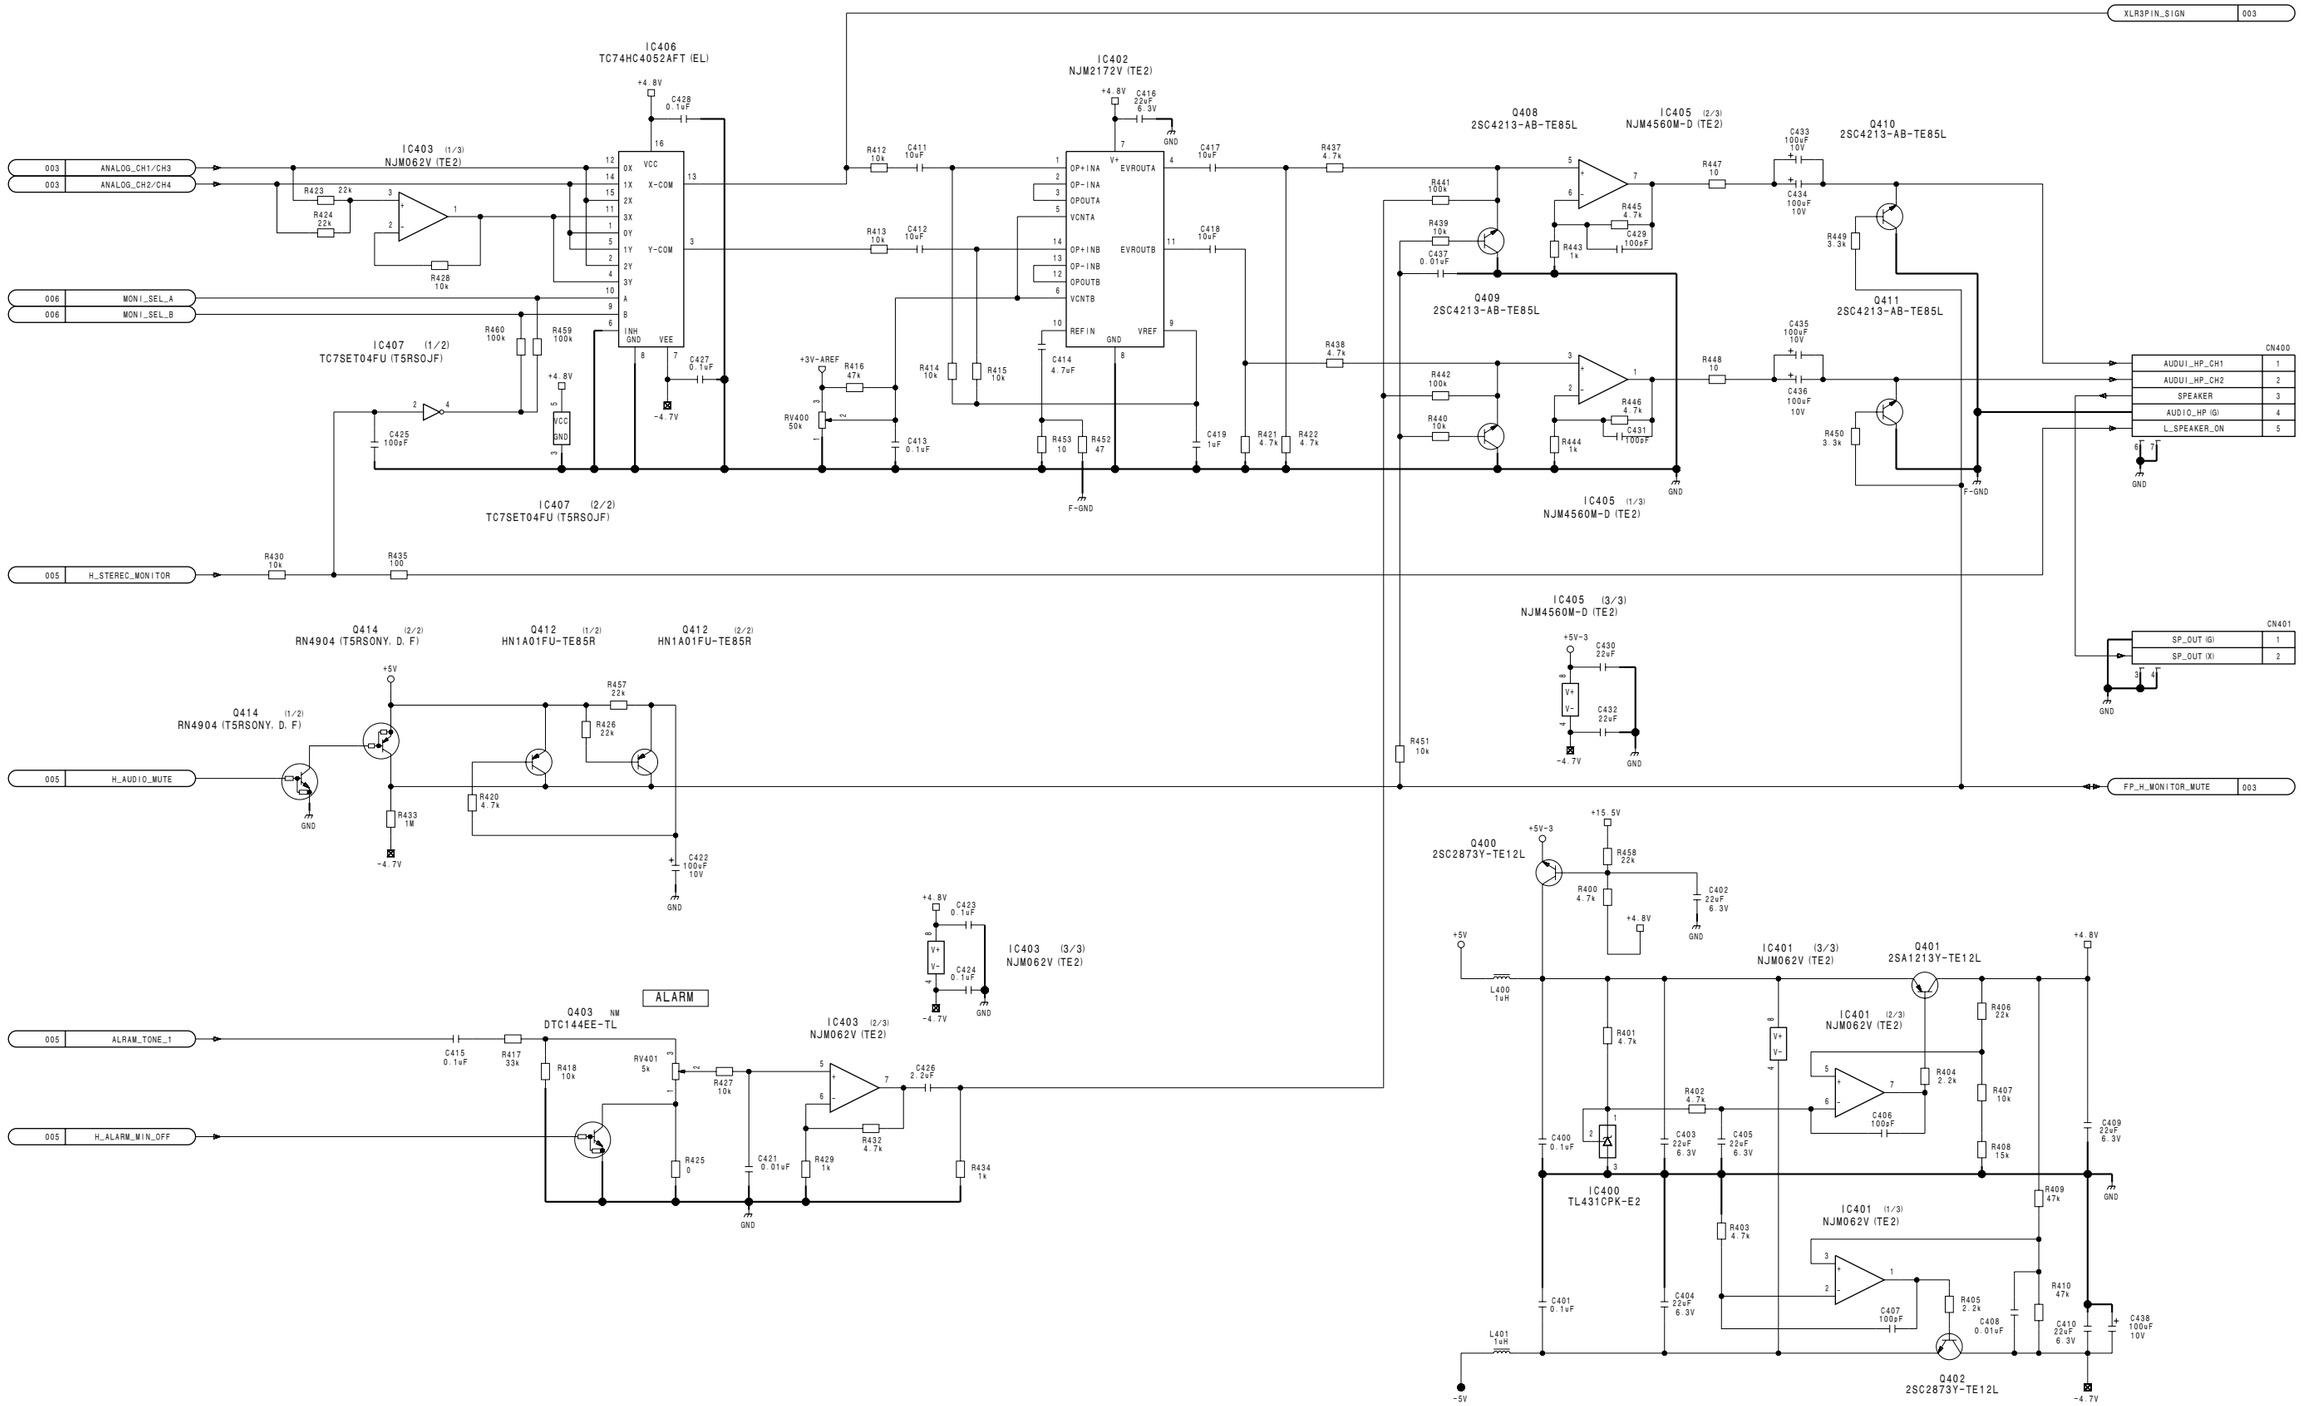

FP-144 (4/6)
BOARD NO. 1-869-661-11
PDW-F350_FP-144_11Q_4

FP-144 (5/6)
SUFFIX: -11

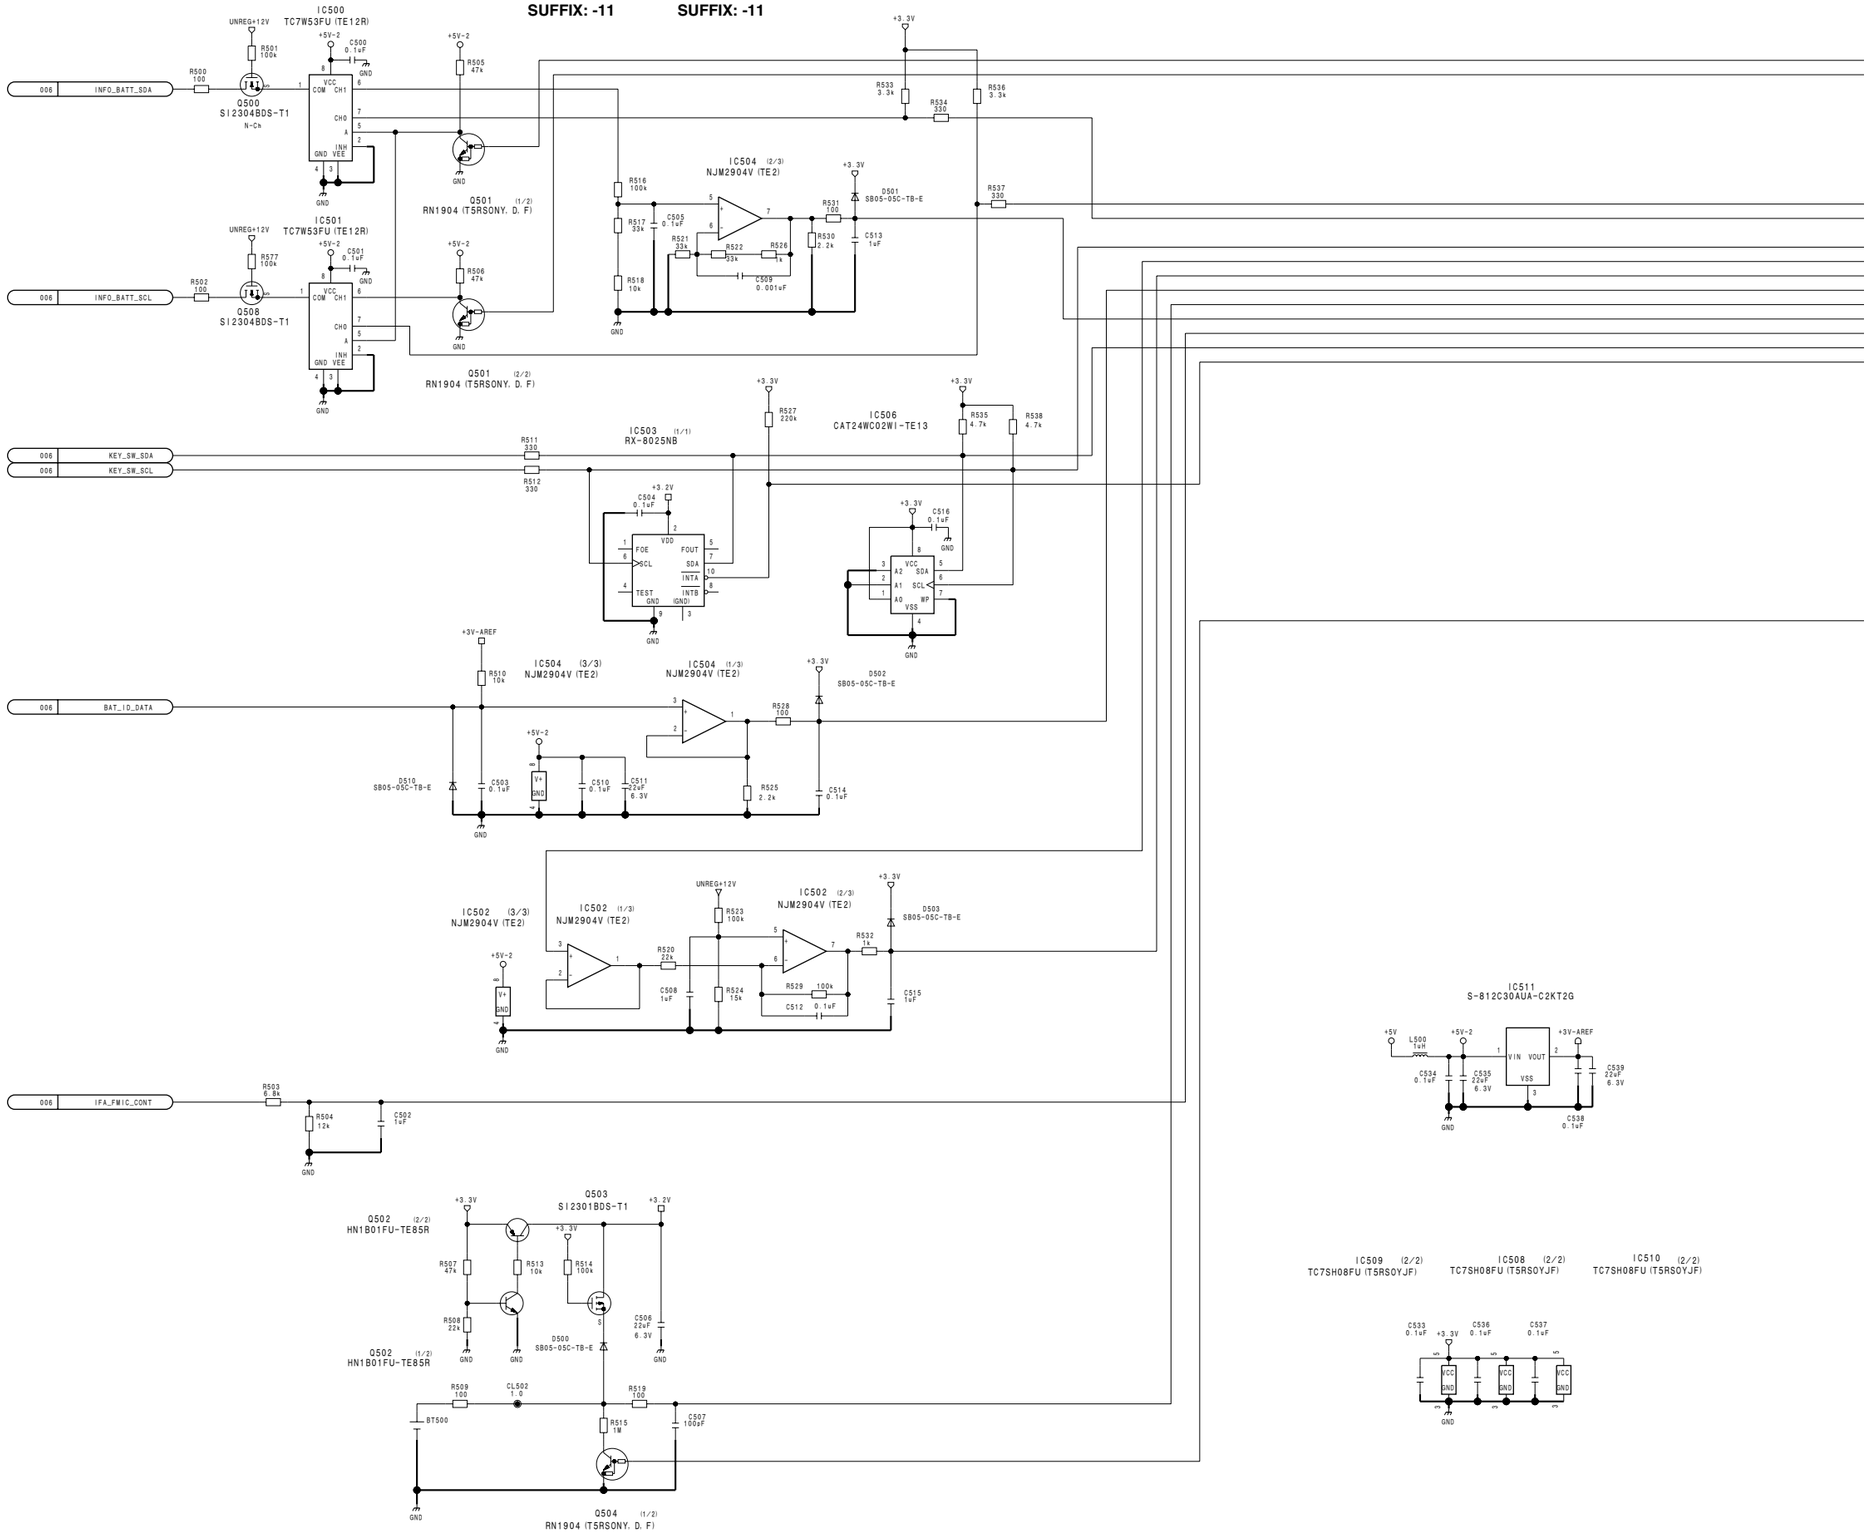

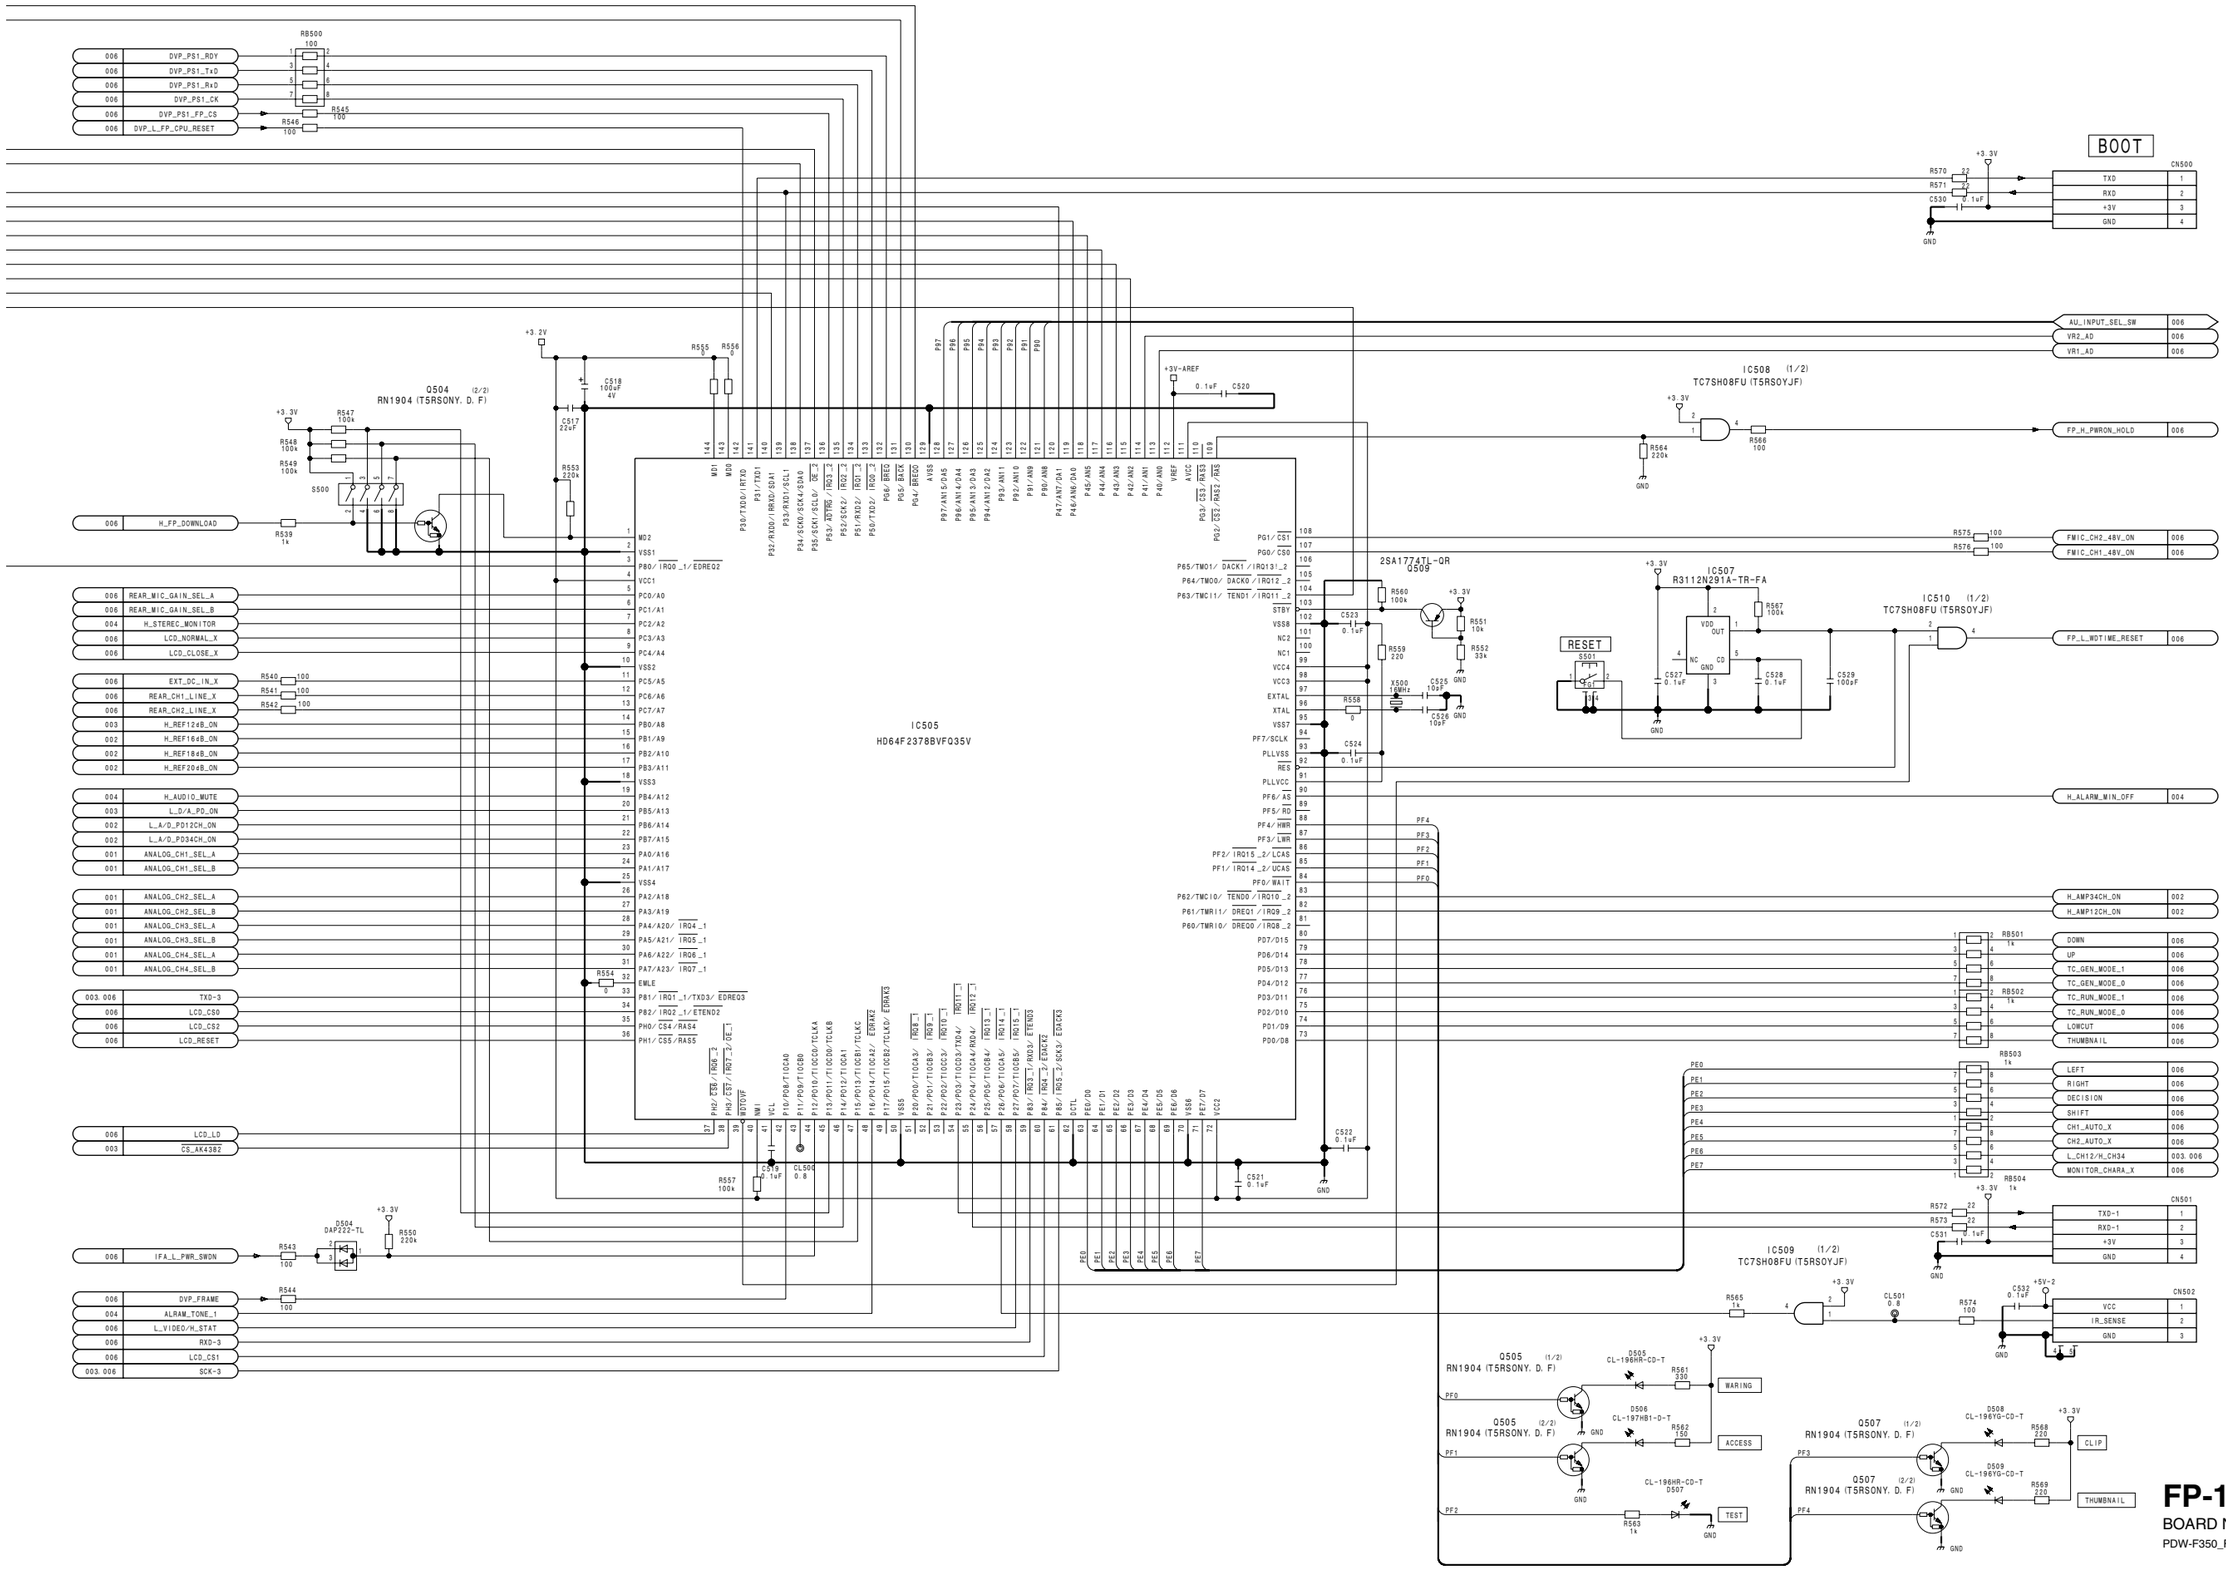

FP-144 (5/6)
BOARD NO. 1-869-661-11
PDW-F350_FP-144_11Q_5

FP-144 (6/6)
SUFFIX: -11

CN105

1	IFA_FMIC_VR_CONT (G)		
2	IFA_FMIC_VR_CONT (X)	IFA_FMIC_CONT	005
3	GND		
4	FMIC_CH2_48V_ON	FMIC_CH2_48V_ON	005
5	IFA_PWR_SWDN	IFA_L_PWR_SWDN	005
6	FMIC_48V_ON/OFF	FMIC_CH1_48V_ON	005
7	KY_SW_SCL	KEY_SW_SCL	005
8	KY_SW_SDA	KEY_SW_SDA	005
9	DVP_PS1_RDY	DVP_PS1_RDY	005
10	DVP_PS1_CK	DVP_PS1_CK	005
11	DVP_PS1_TxD	DVP_PS1_TxD	005
12	DVP_PS1_RxD	DVP_PS1_RxD	005
13	DVP_PS1_FP_CS	DVP_PS1_FP_CS	005
14	DVP_FRAME	DVP_FRAME	005
15	DVP_L_FP_CPU_RESET	DVP_L_FP_CPU_RESET	005
16	FP_L_WDTIME_RESET	FP_L_WDTIME_RESET	005
17	DVP_FP_CHAR_BLK	CHAR_BLK	006
18	DVP_FP_CHAR_R	CHAR_R	006
19	DVP_FP_CHAR_G	CHAR_G	006
20	DVP_FP_CHAR_B	CHAR_B	006
21	GND		
22	FP_REC_AU_D34	FP_REC_AU_D34	002
23	FP_REC_AU_D12	FP_REC_AU_D12	002
24	DVP_PB_AU_D34	DVP_PB_AU_D34	003
25	DVP_PB_AU_D12	DVP_PB_AU_D12	003
26	GND		
27	DVP_FP_AU_FS	DVP_FP_AU_FS	006
28	DVP_FP_AU_64FS	DVP_FP_AU_64FS	006
29	DVP_FP_AU_256FS	DVP_FP_AU_256FS	006
30	GND		

32 31

GND

CN107

1	FP_AU_PB1 (G)		
2	FP_AU_PB1 (X)	FP_AU_PB1 (X)	003
3	FP_AU_PB1 (Y)	FP_AU_PB1 (Y)	003
4	FP_AU_PB2 (G)		
5	FP_AU_PB2 (X)	FP_AU_PB2 (X)	003
6	FP_AU_PB2 (Y)	FP_AU_PB2 (Y)	003
7	GND		
8	AA_MIC_GAIN_SEL	MIC_GAIN_SEL	006
9	RESERVED		
10	BAT_ID_DATA	BAT_ID_DATA	005
11	INFO_BATT_SCL	INFO_BATT_SCL	005
12	GND		
13	INFO_BATT_SDA	INFO_BATT_SDA	005
14	GND		
15	INPUT_CH1_LINE	REAR_CH1_LINE_X	005
16	INPUT_CH2_LINE	REAR_CH2_LINE_X	005
17	CNB_L_EX_DCIN	EXT_DC_IN_X	005
18	FP_H_PWRON_HOLD	FP_H_PWRON_HOLD	005
19	GND		
20	+15.5V		
21	UNREG+12V		
22	-5V		
23	-5V		
24	GND		
25	GND		
26	+5V		
27	+5V		
28	+3.3V		
29	+3.3V		
30	GND		

CL601 0.8

+15.5V
UNREG+12V
+5V
-5V
+3.3V
L600 1uH
C601 22uF
C616 22uF
C617 22uF

32 31

GND

IC601
TC74LCX245FT (EKJ)

+3.3V
C602 0.1uF
GND

R612 22k
R615 22k
R616 22k

006	DVP_FP_AU_256FS	18	R618 47	256_FS1	002
		17	R619 47	256_FS2	003
006	DVP_FP_AU_64FS	15	R620 47	64_FS1	002
		14	R621 47	64_FS2	003
006	DVP_FP_AU_FS			FS_1	002
				FS_2	003

VCC
A1 A2 A3 A4 A5 A6 A7 A8
B1 B2 B3 B4 B5 B6 B7 B8
20
OE 19
DIR 1
GND 10

GND

Q602 (1/2)
RN4904 (T5RSONY. D. F)

Q602 (2/2)
RN4904 (T5RSONY. D. F)

+5V

005	REAR_MIC_GAIN_SEL_B		
005	REAR_MIC_GAIN_SEL_A	MIC_GAIN_SEL	006

GND

D600
SB05-05C-TB-E

R617 1k

CN106

1	GND		
2	H_FP_DOWNLOAD	H_FP_DOWNLOAD	005
3	MA_FMIC1 (G)		
4	MA_FMIC1 (X)	FRONT_MIC1_X	001
5	MA_FMIC1 (Y)	FRONT_MIC1_Y	001
6	MA_FMIC2 (G)		
7	MA_FMIC2 (X)	FRONT_MIC2_X	001
8	MA_FMIC2 (Y)	FRONT_MIC2_Y	001
9	GND		
10	FP_SW_SCL		
11	DCP_SW_SDA		
12	FP_RTRY_B		
13	FP_RTRY_A		
14	FP_L_RTRY_PUSH		
15	GND		
16	LCD_VD	LCD_VD	006
17	LCD_HD	LCD_HD	006
18	LCD_B_VIDEO	LCD_B_VIDEO	006
19	LCD_R_VIDEO	LCD_R_VIDEO	006
20	LCD_G_VIDEO	LCD_G_VIDEO	006
21	GND		
22	WRR_CA_AU (X)	WRR_CA_AU_X	001
23	WRR_CA_AU (Y)	WRR_CA_AU_Y	001
24	WRR_CA_AU (G)		
25	AA_CH1_MIC/LINE (X)	AXM_CH1_MIC/LINE_X	001
26	AA_CH1_MIC/LINE (Y)	AXM_CH1_MIC/LINE_Y	001
27	AA_CH1_MIC/LINE (G)		
28	AA_CH2_MIC/LINE (X)	AXM_CH2_MIC/LINE_X	001
29	AA_CH2_MIC/LINE (Y)	AXM_CH2_MIC/LINE_Y	001
30	AA_CH2_MIC/LINE (G)		

32 31

GND

R600 100k
R601 100k
C600 0.1uF
GND

+3.3V

IC600
PCA9555DB-118

SDA 23
A2 3
A1 2
A0 21
SCL 22
VDD 24
I/O0.0 4
I/O0.1 5
I/O0.2 6
I/O0.3 7
I/O0.4 8
I/O0.5 9
I/O0.6 10
I/O0.7 11
I/O1.0 13
I/O1.1 14
I/O1.2 15
I/O1.3 16
I/O1.4 17
I/O1.5 18
I/O1.6 19
I/O1.7 20
INT 1
VSS 12

GND

R602 100
R603 100
R604 100

RB600 1k
RB601 1k

R605 1k
R606 220
R607 220
R608 220
R609 1k
R610 1k
R611 1k

R613 0
R614 0

CN600

GND	1	14 15
ROTARY_PUSH	2	
ROTARY_A	3	
ROTARY_B	4	
STBY/SAVE	5	
GAIN_LOW	6	
GAIN_HIGH	7	
DCC_ON	8	
BARS	9	
WHITE_B	10	
WHITE_PRESET	11	
STATUS	12	
MENU	13	

CN601

LED_1	1
LED_2	2
LED_3	3
SW_1	4
SW_2	5
SW_3	6
GND	7

8 9

GND

FP-144 (6/6) **SUFFIX: -11**

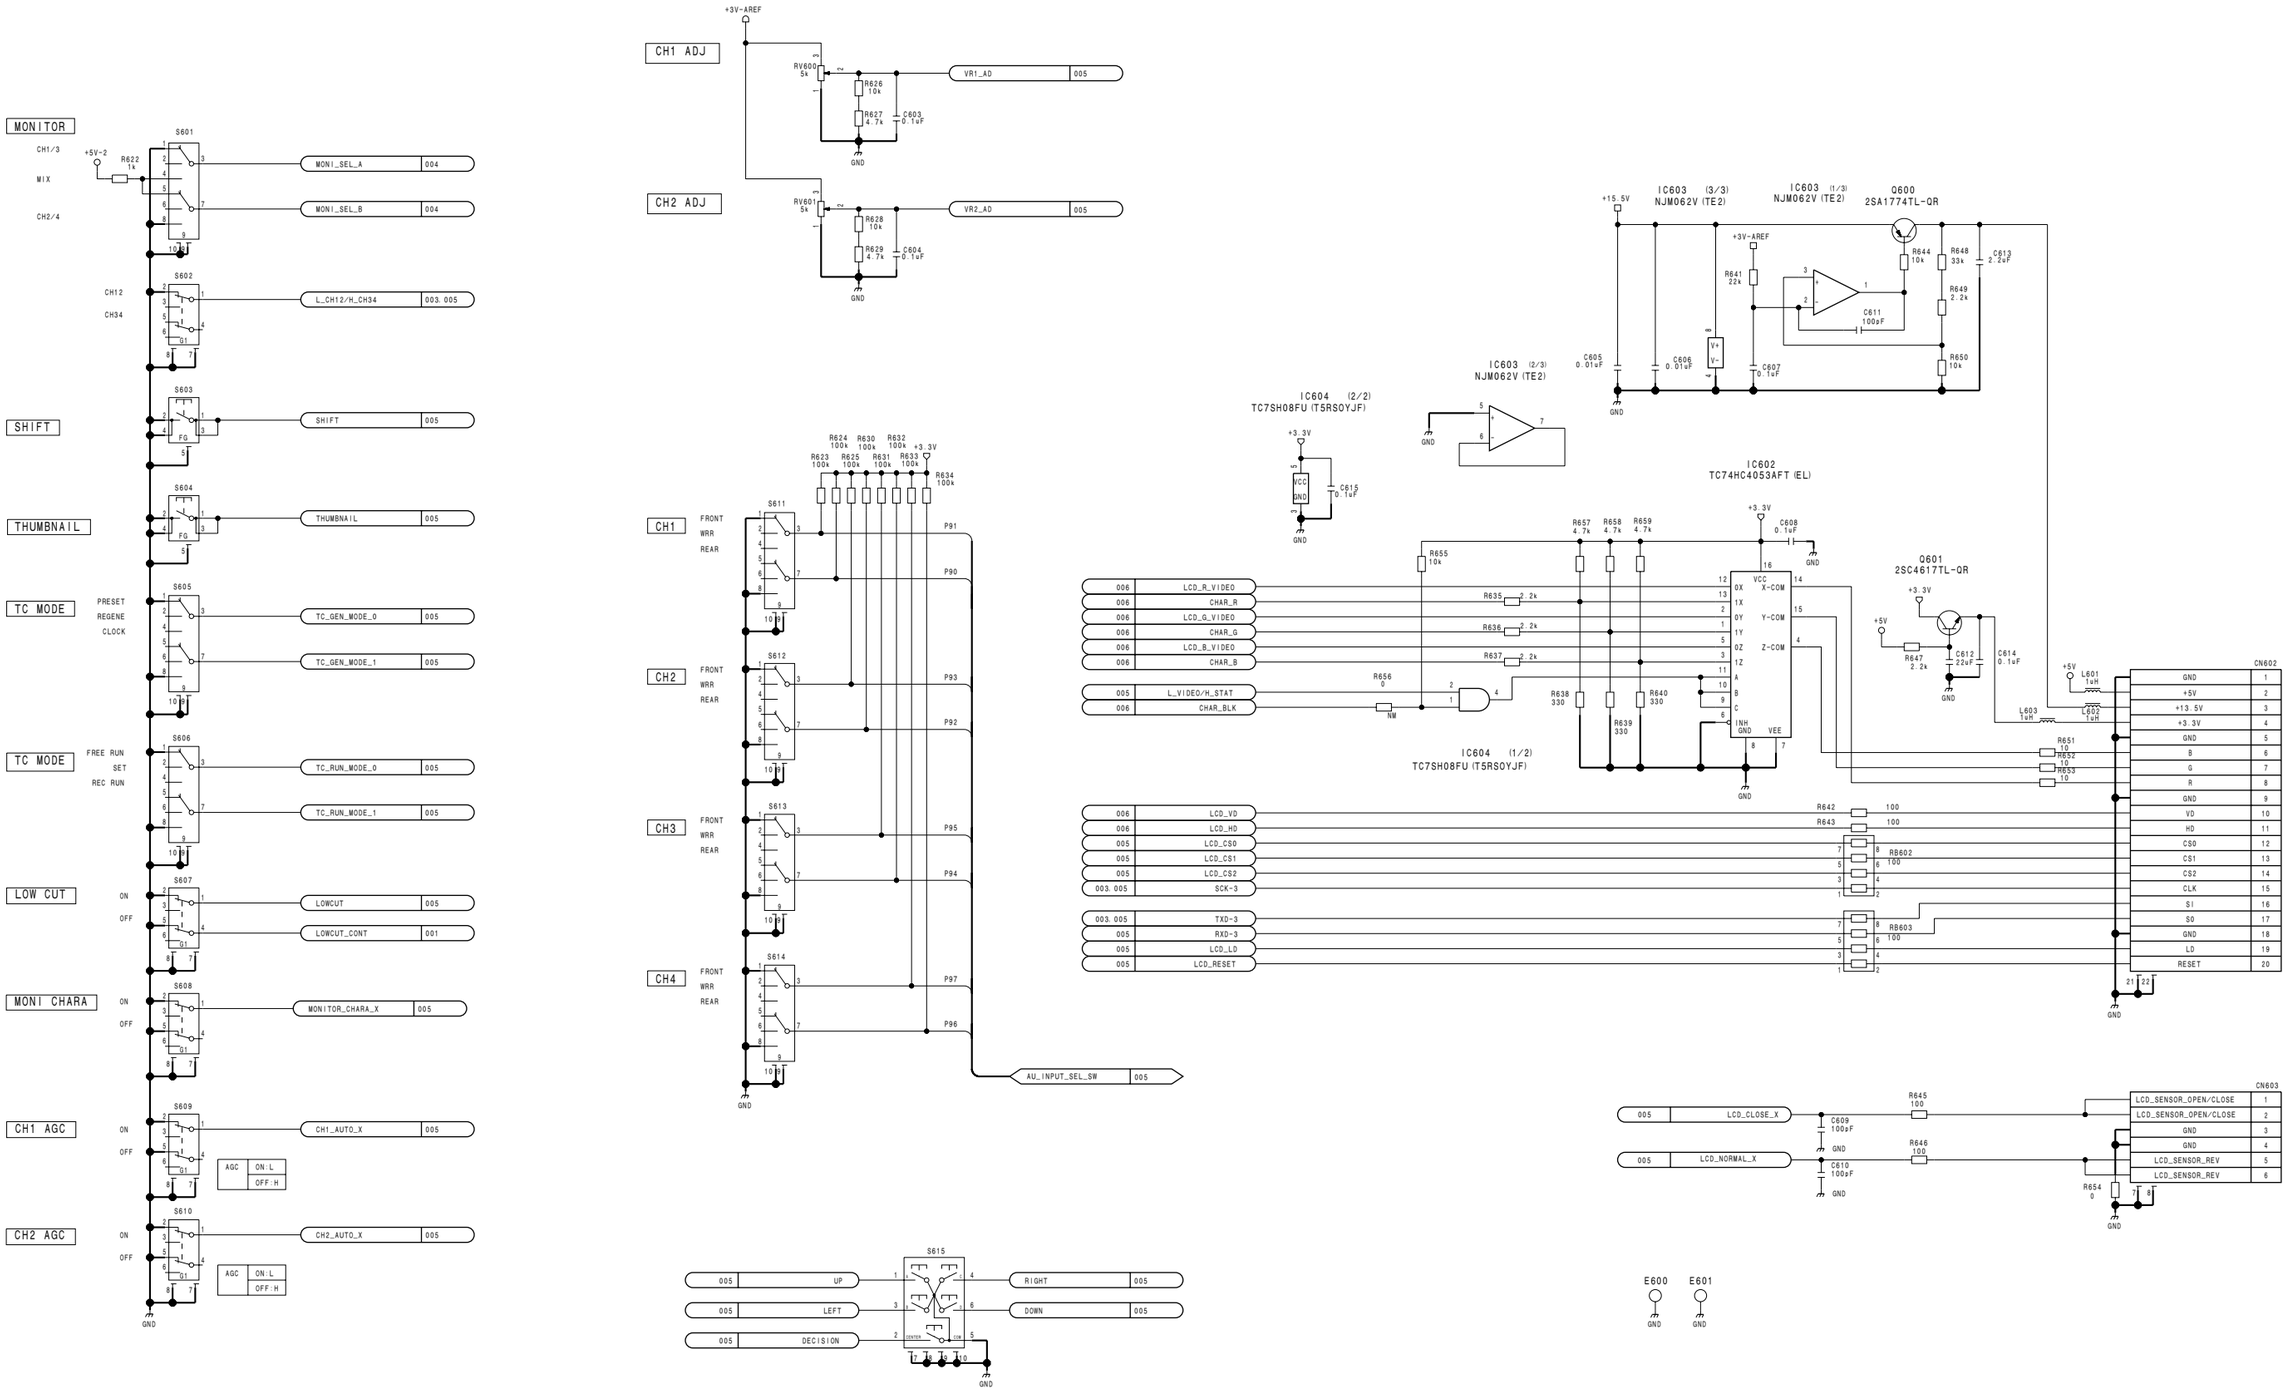

FP-144 (6/6)
BOARD NO. 1-869-661-11
PDW-F350_FP-144_11Q_6

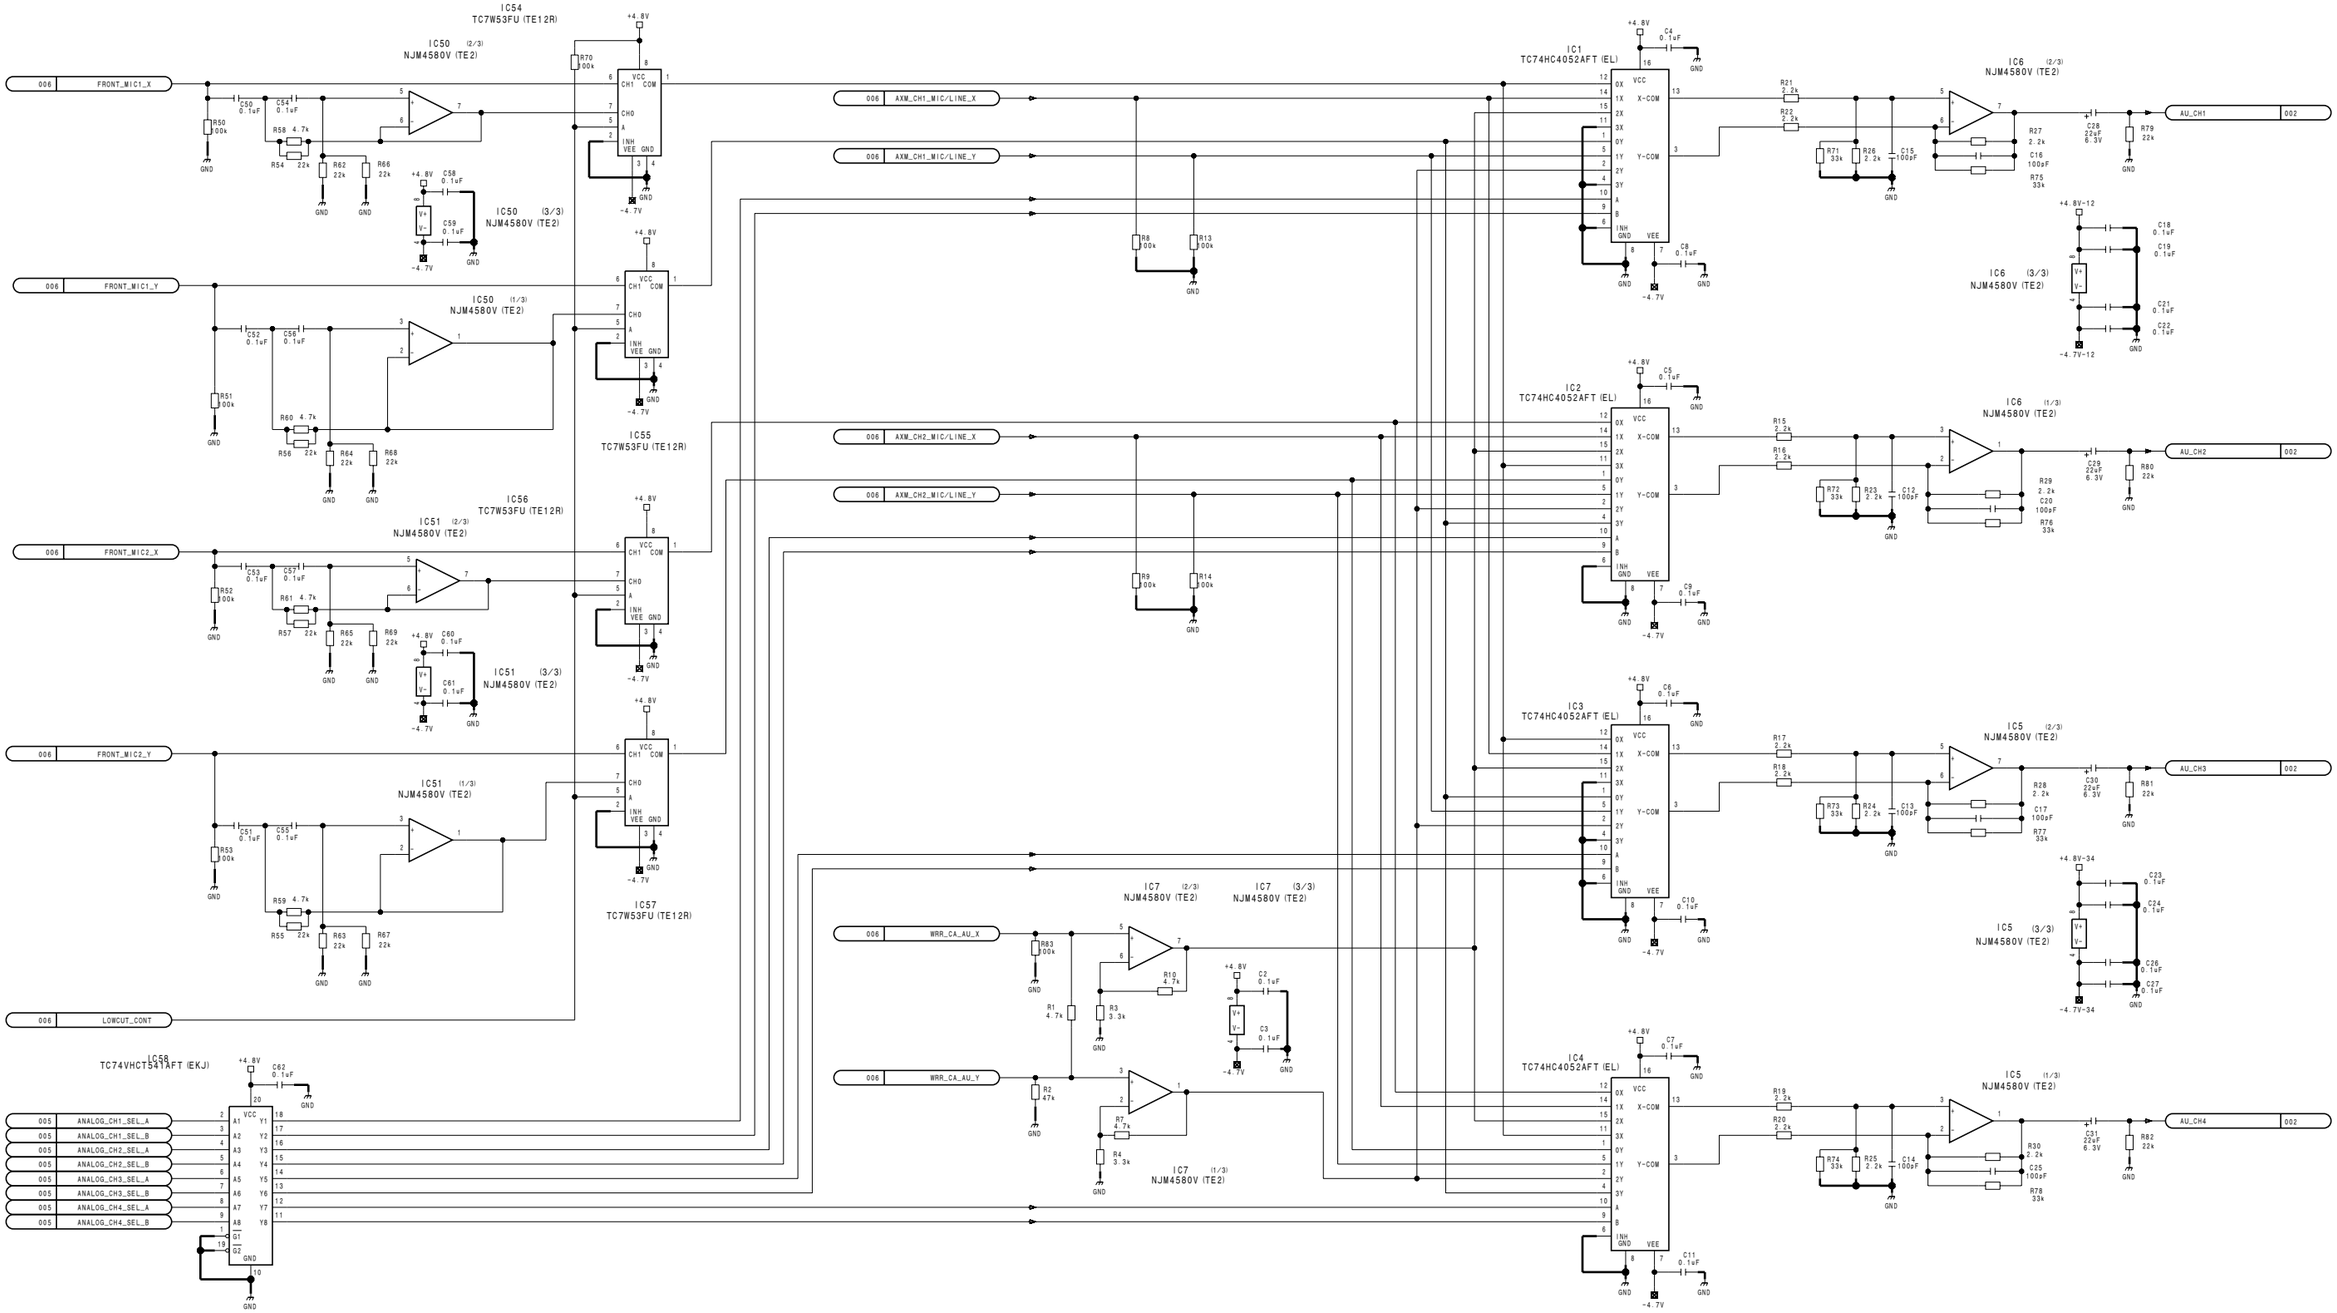

FP-144A (1/6)
BOARD NO. 1-869-661-11
PDW-F330_FP-144A_11Q_1

FP-144A (2/6)
SUFFIX: -11

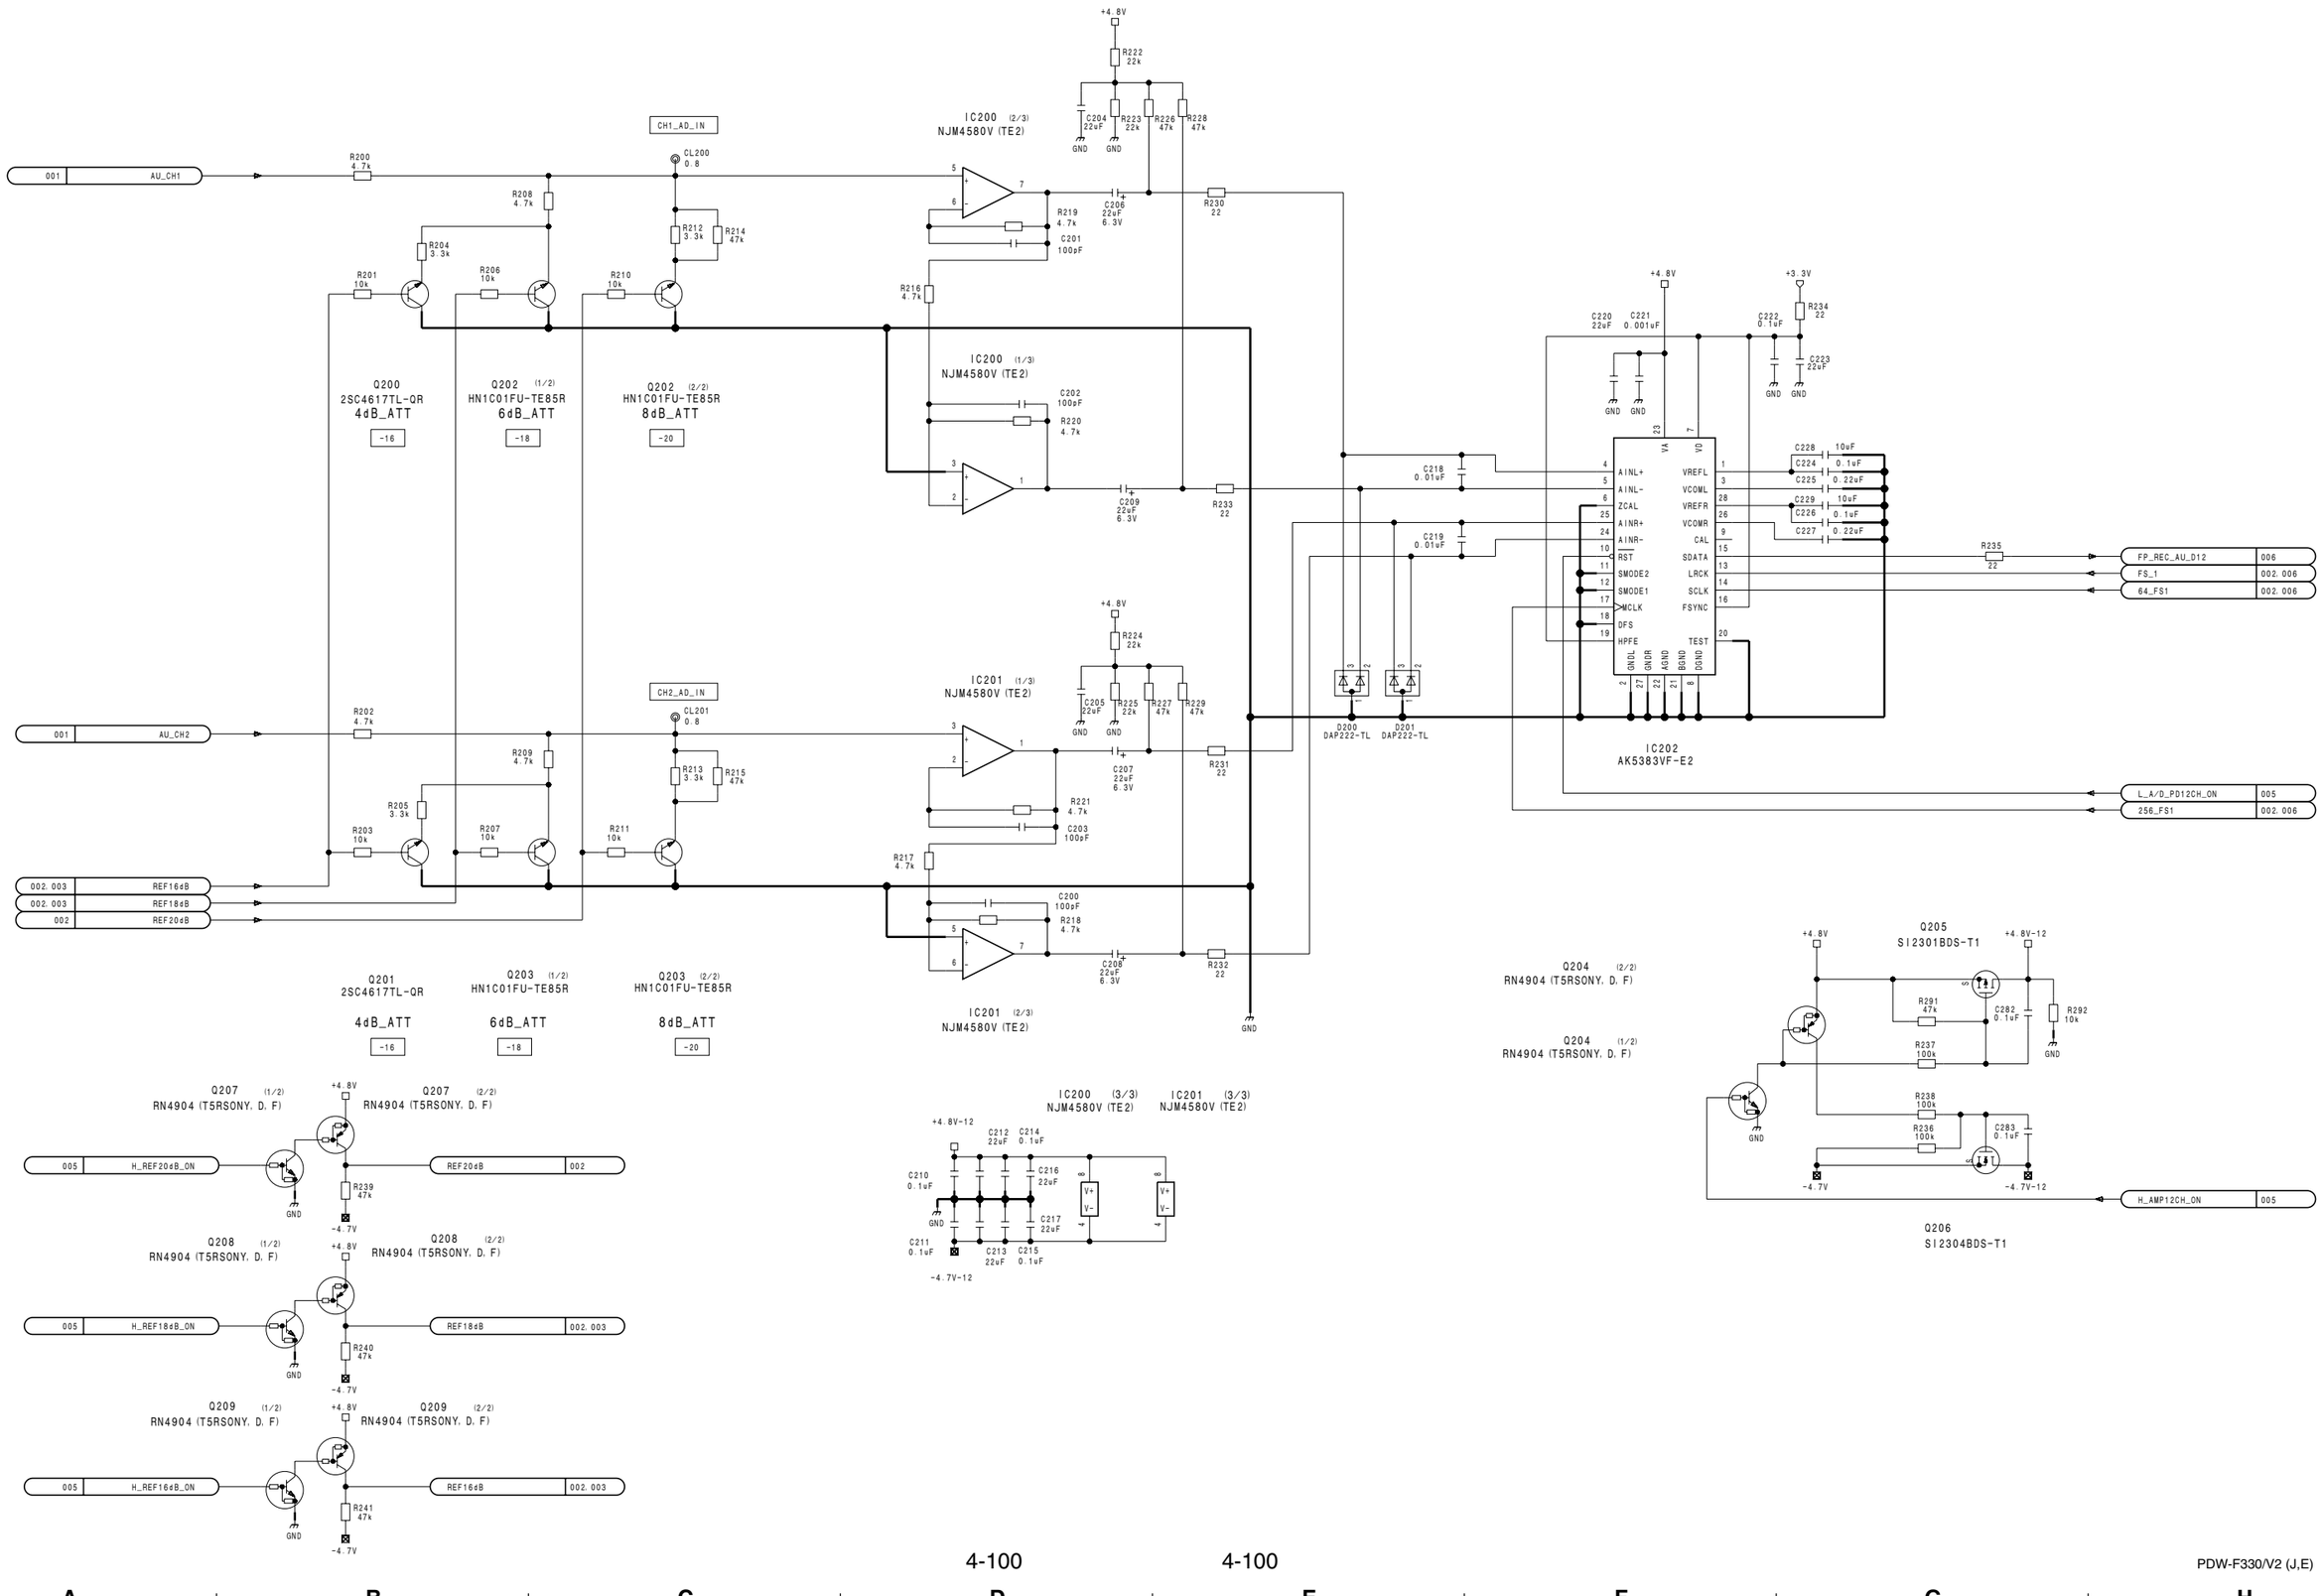

4-100

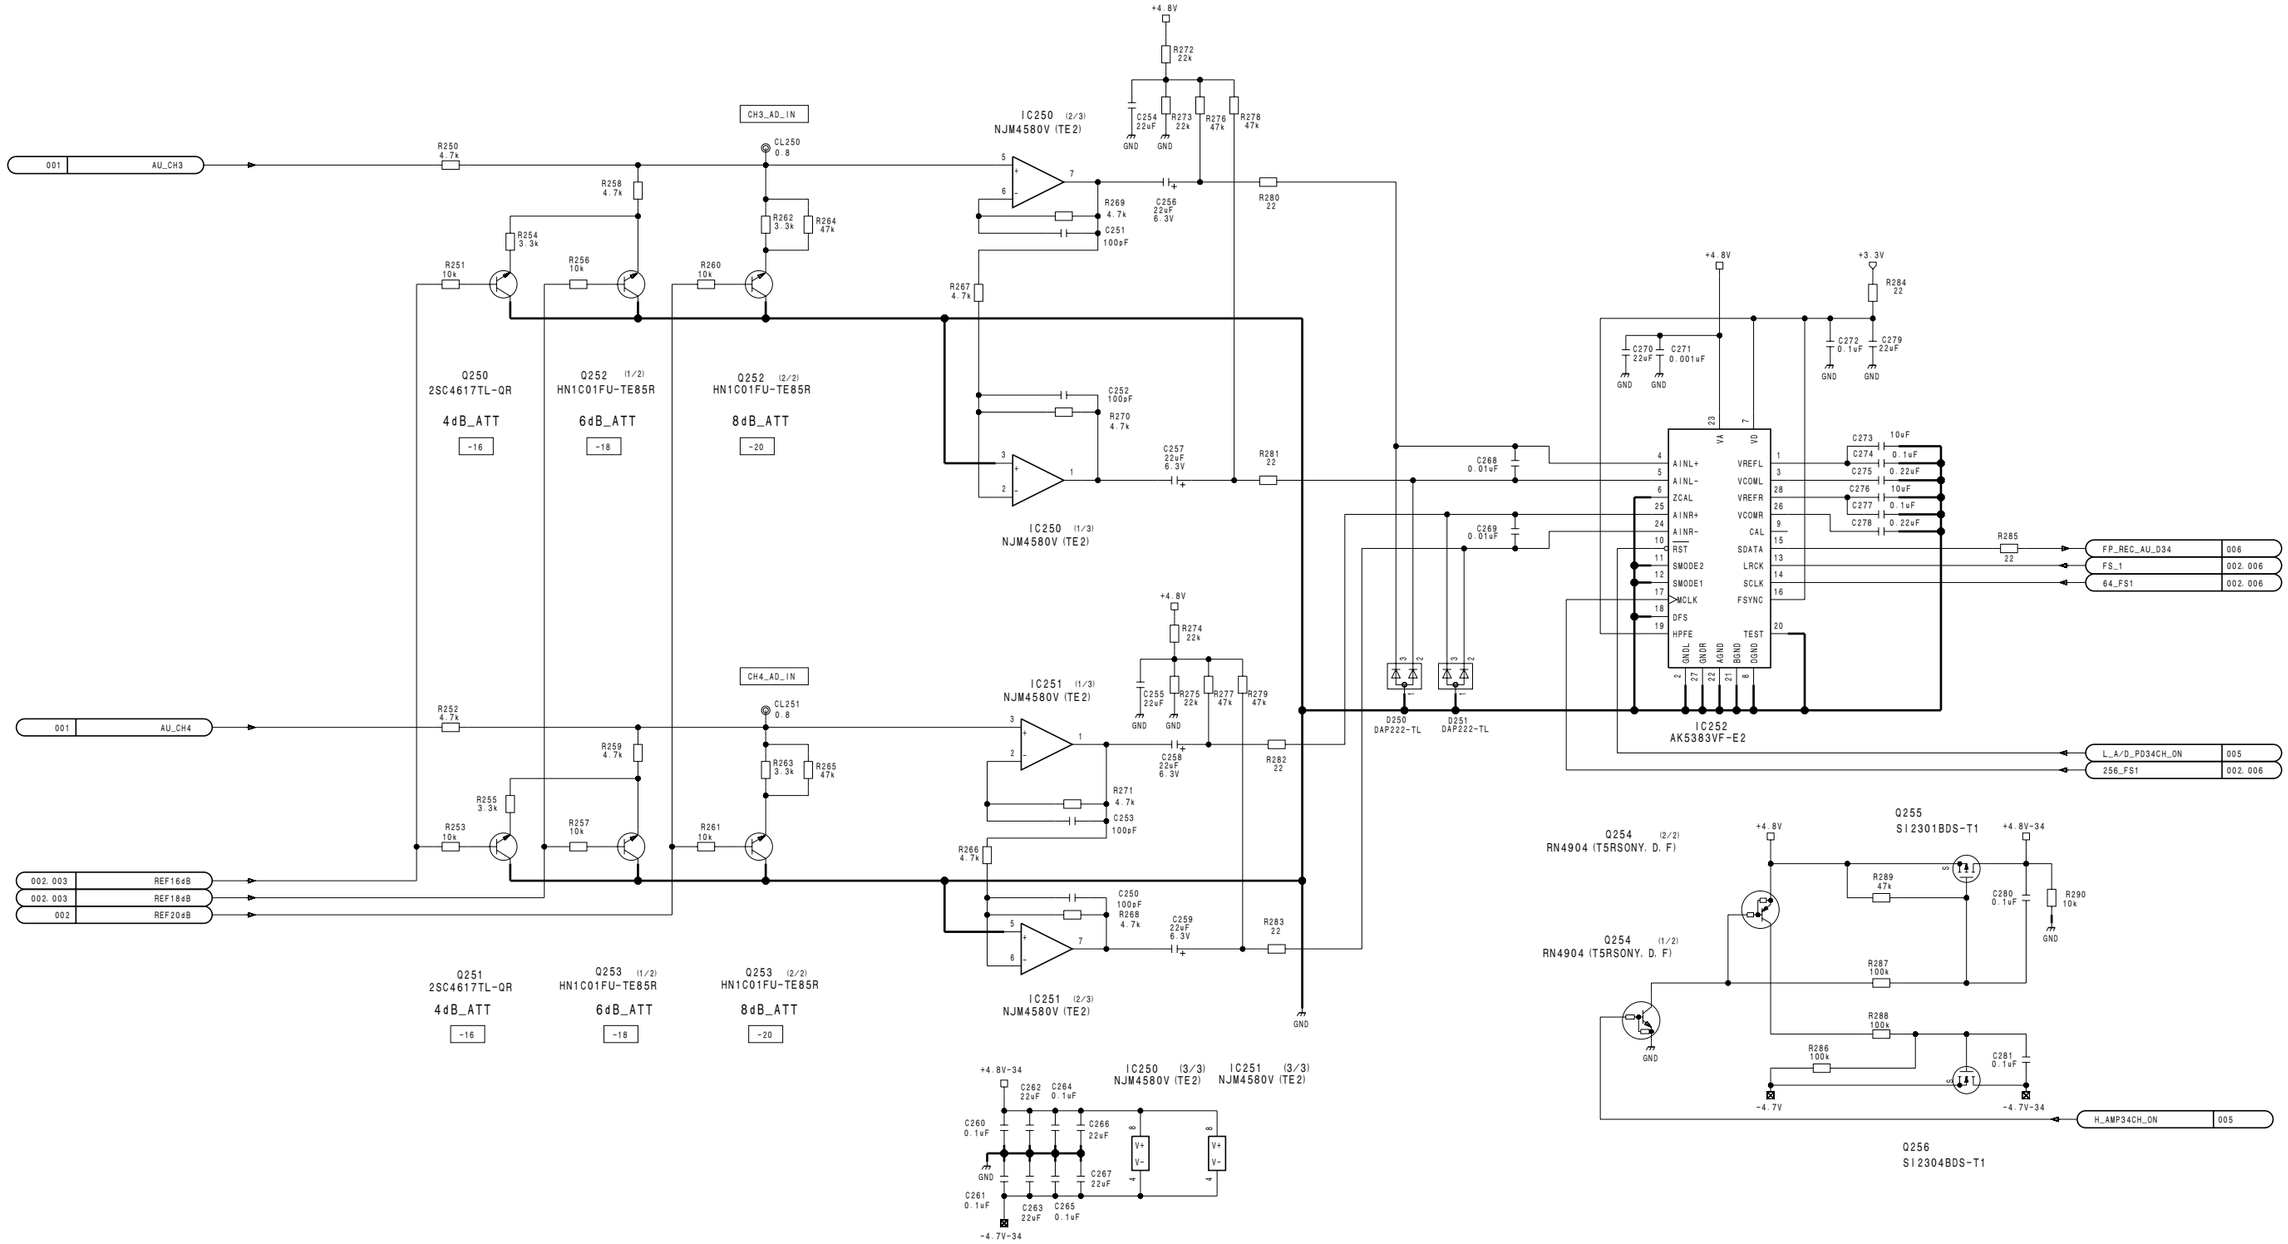

FP-144A (2/6)
BOARD NO. 1-869-661-11
PDW-F330_FP-144A_11Q_2

FP-144A (3/6)
SUFFIX: -11

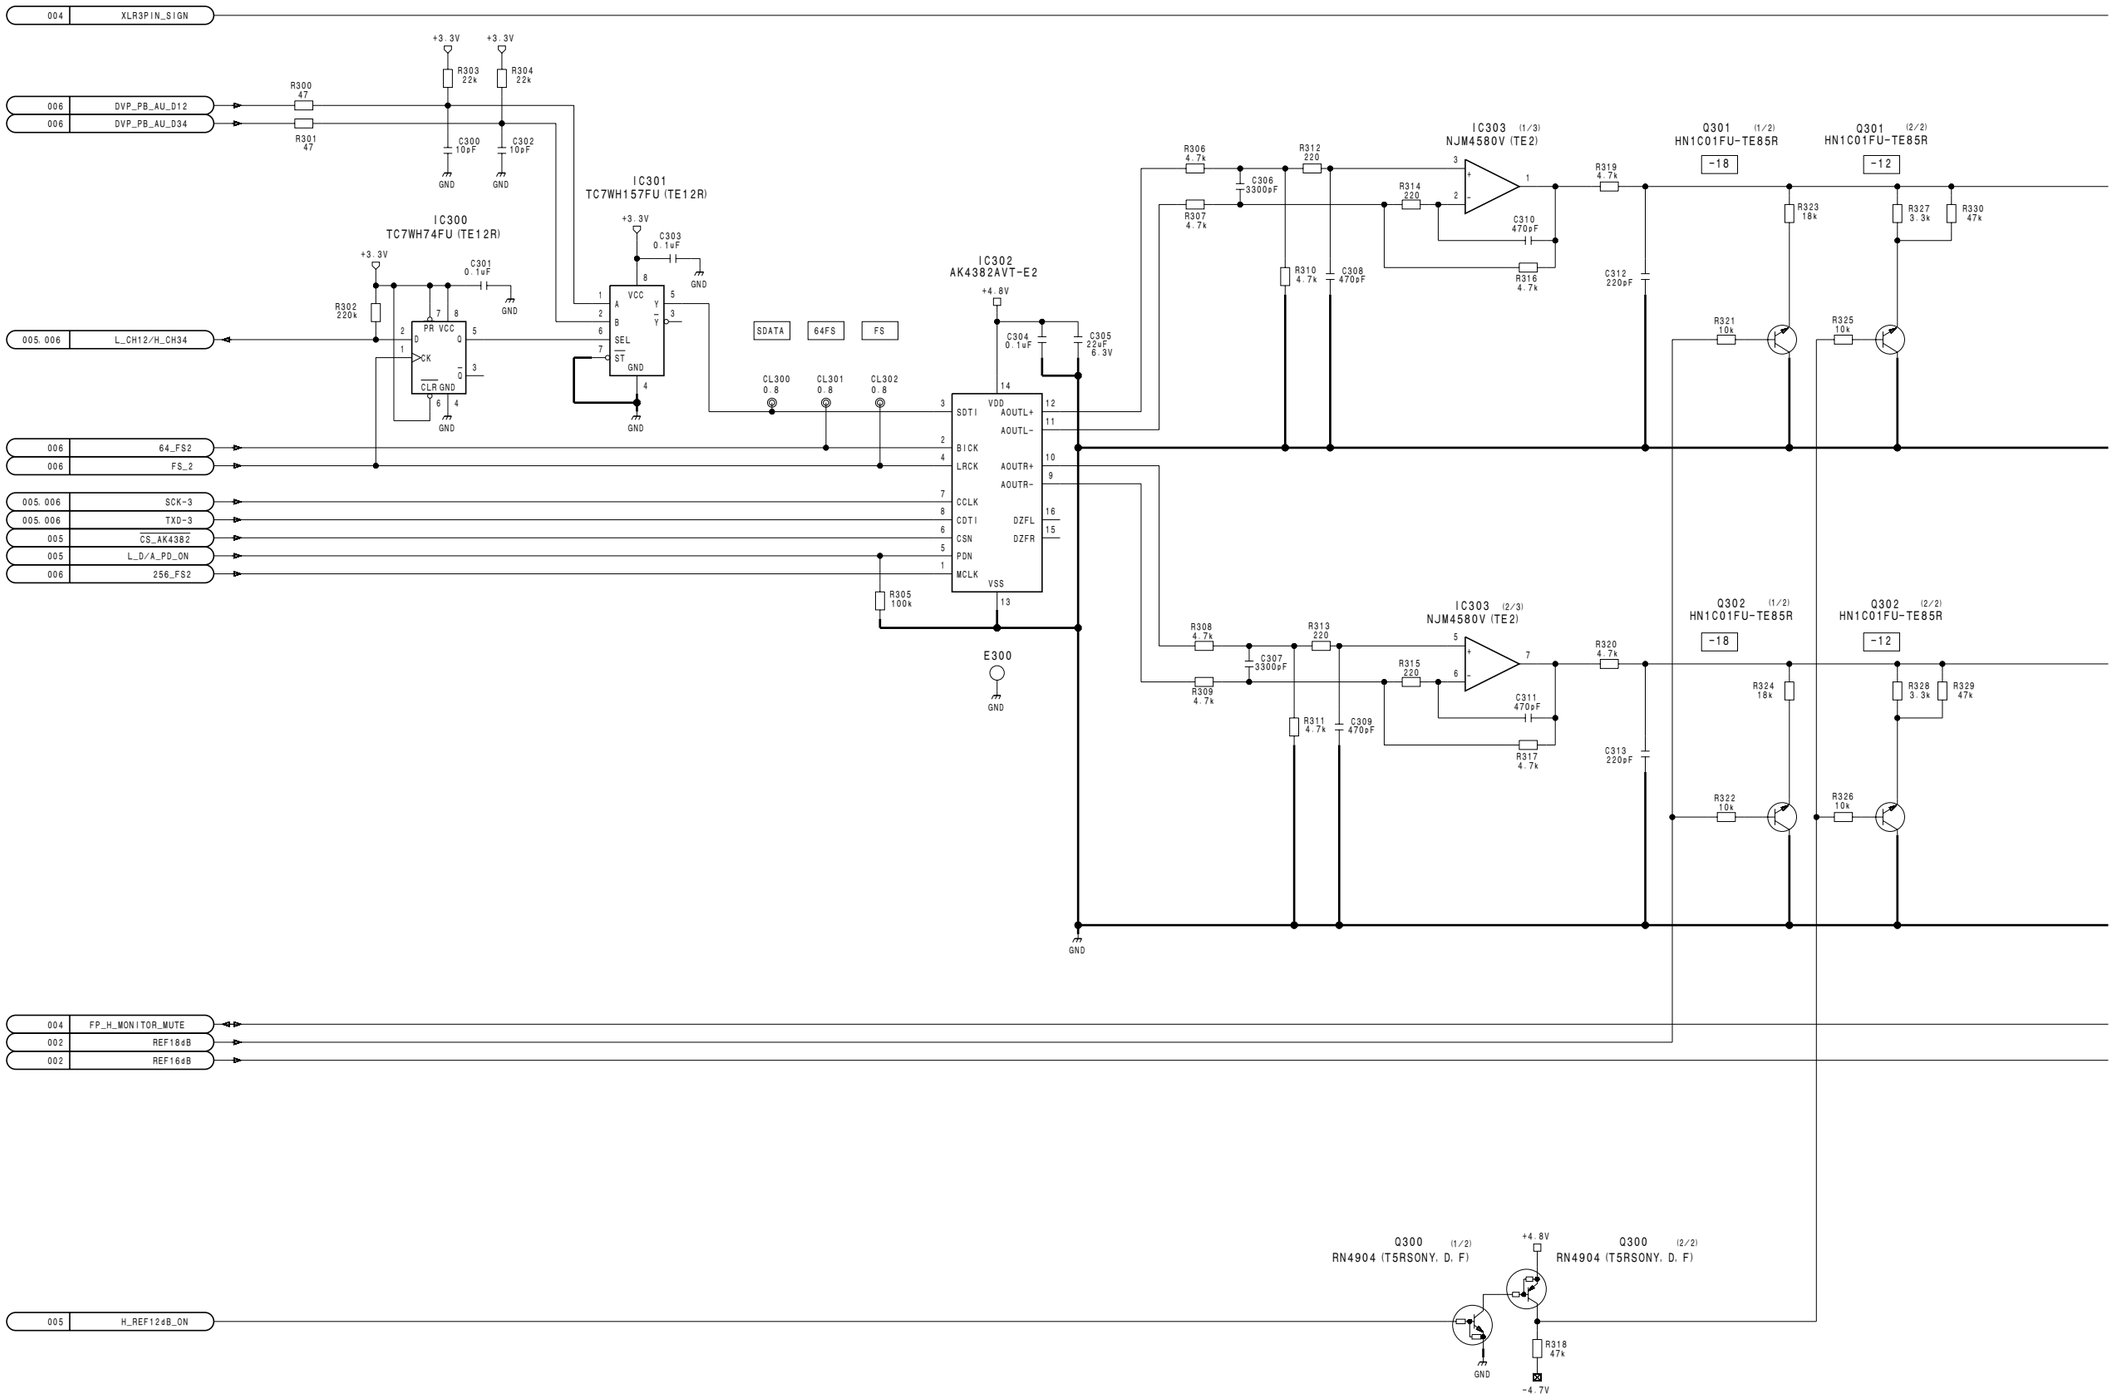

4-102

FP-144A (3/6)
SUFFIX: -11

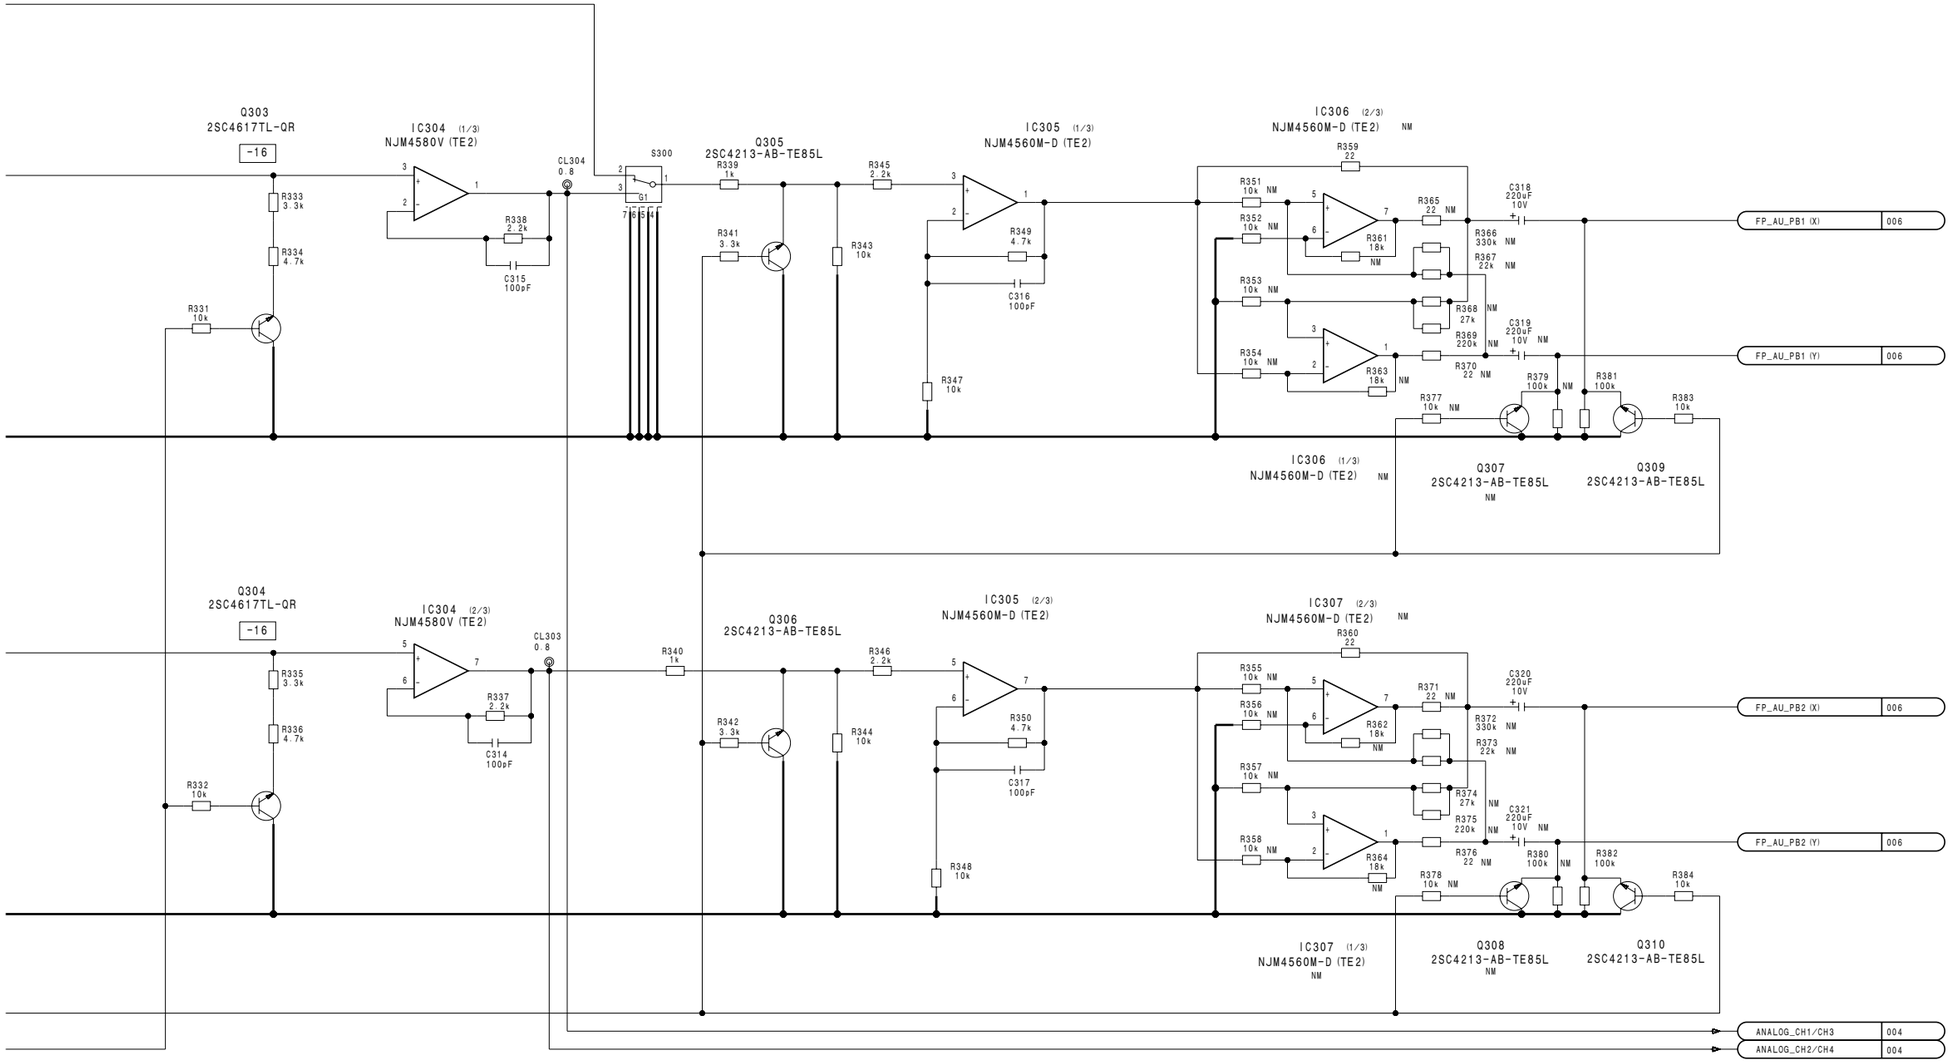

FP-144A (3/6)
BOARD NO. 1-869-661-11
PDW-F330_FP-144A_11Q_3

FP-144A (4/6)
SUFFIX: -11

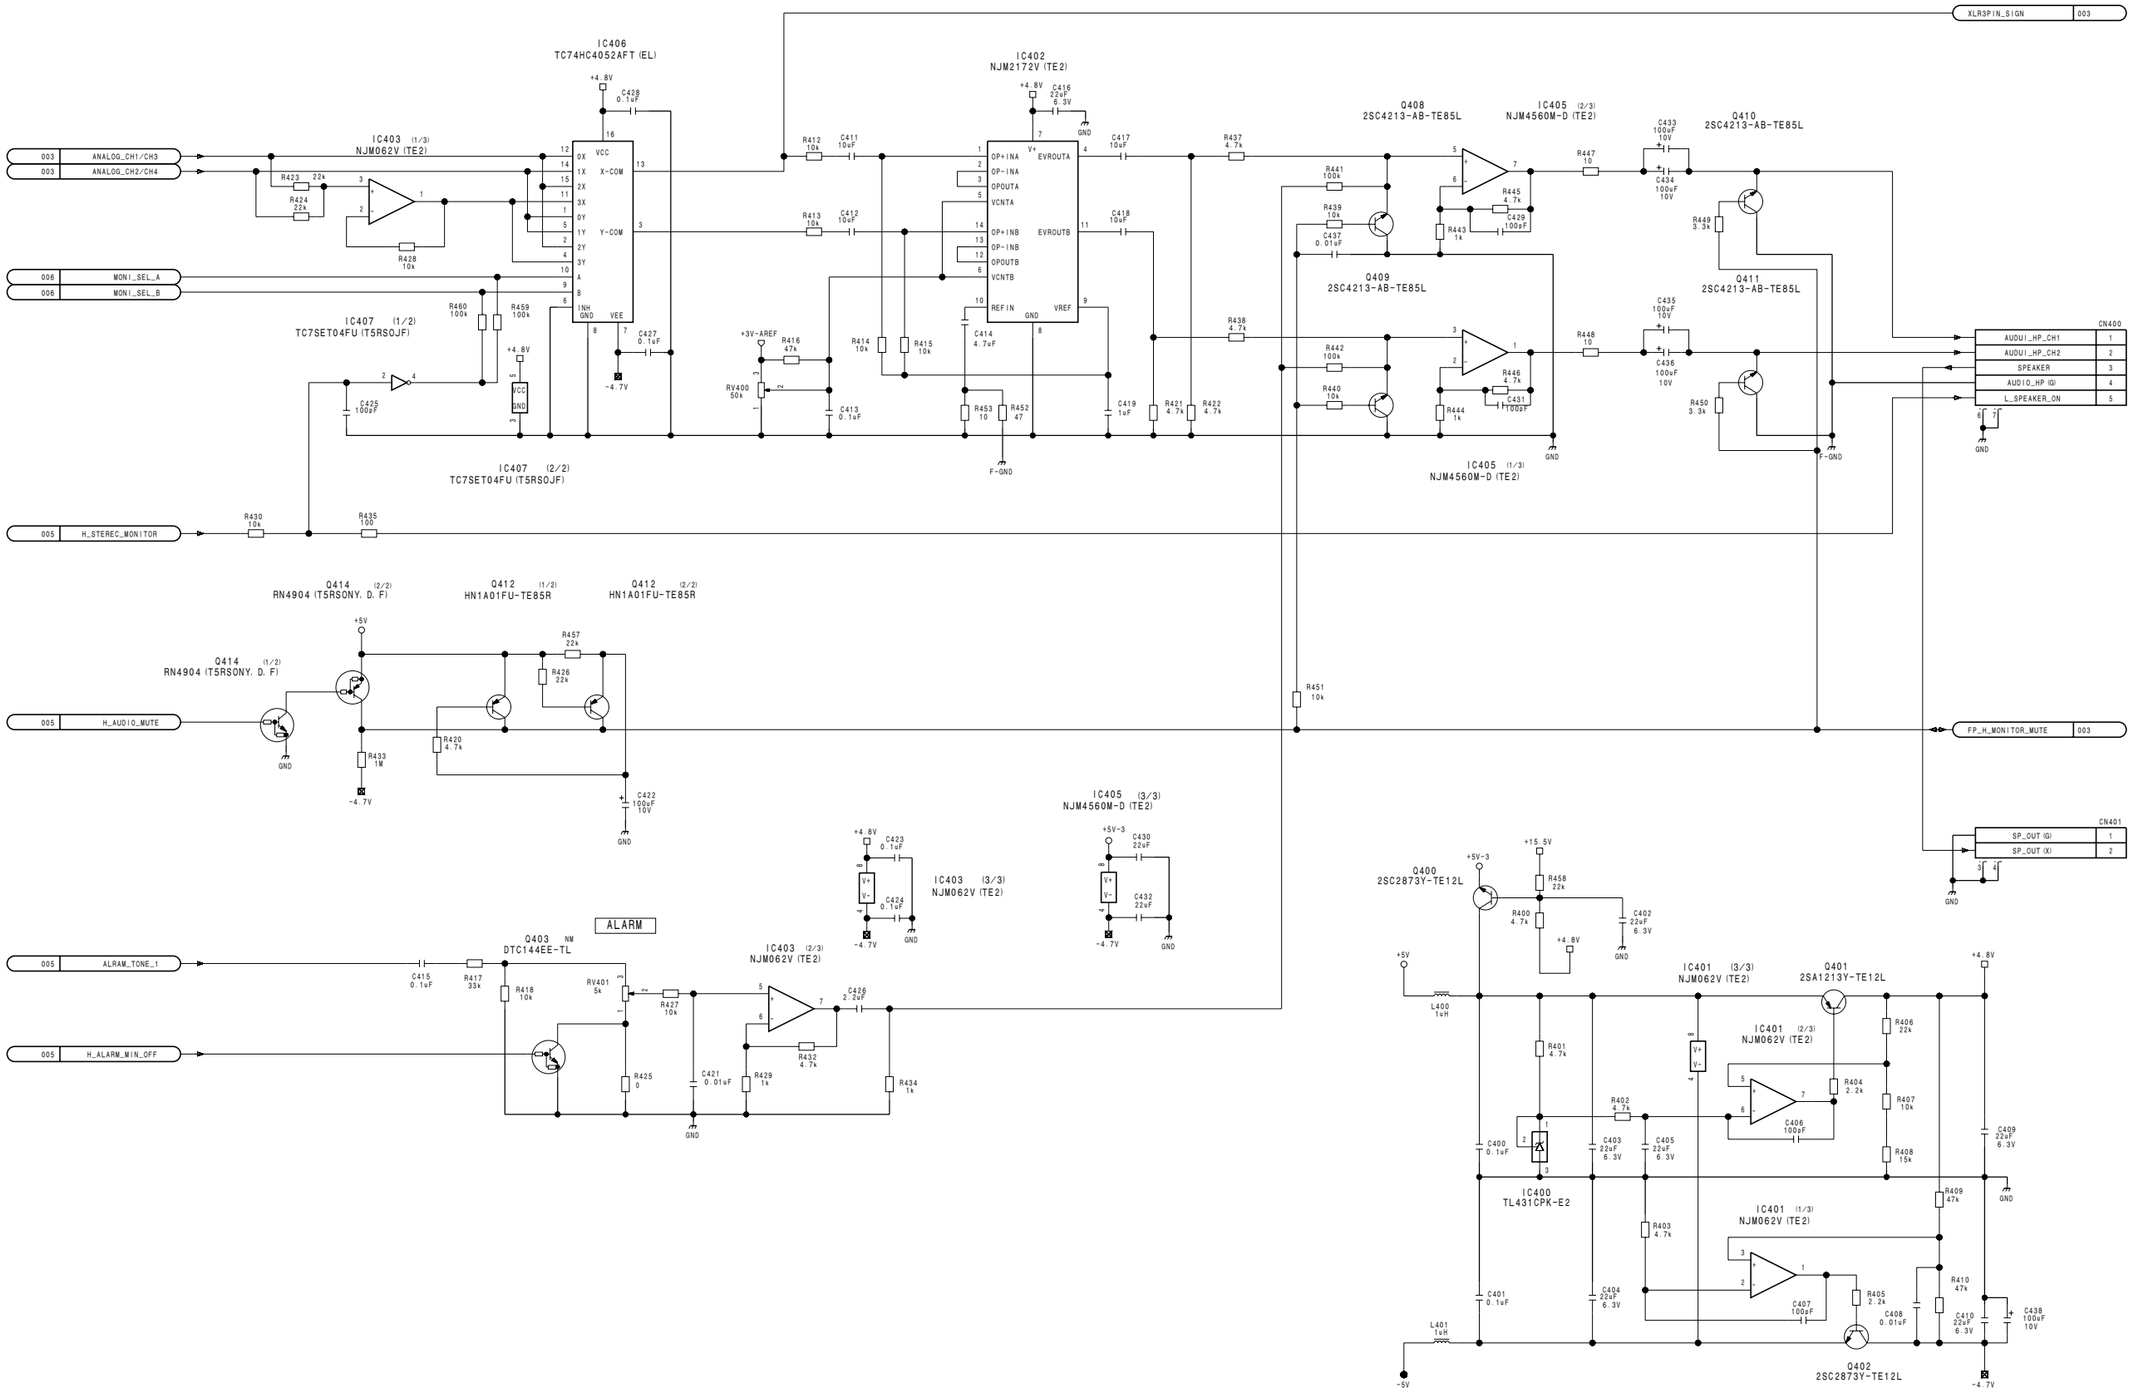

FP-144A (4/6)
BOARD NO. 1-869-661-11
PDW-F330_FP-144A_11Q_4

FP-144A (5/6)
SUFFIX: -11

FP-144A (5/6)
SUFFIX: -11

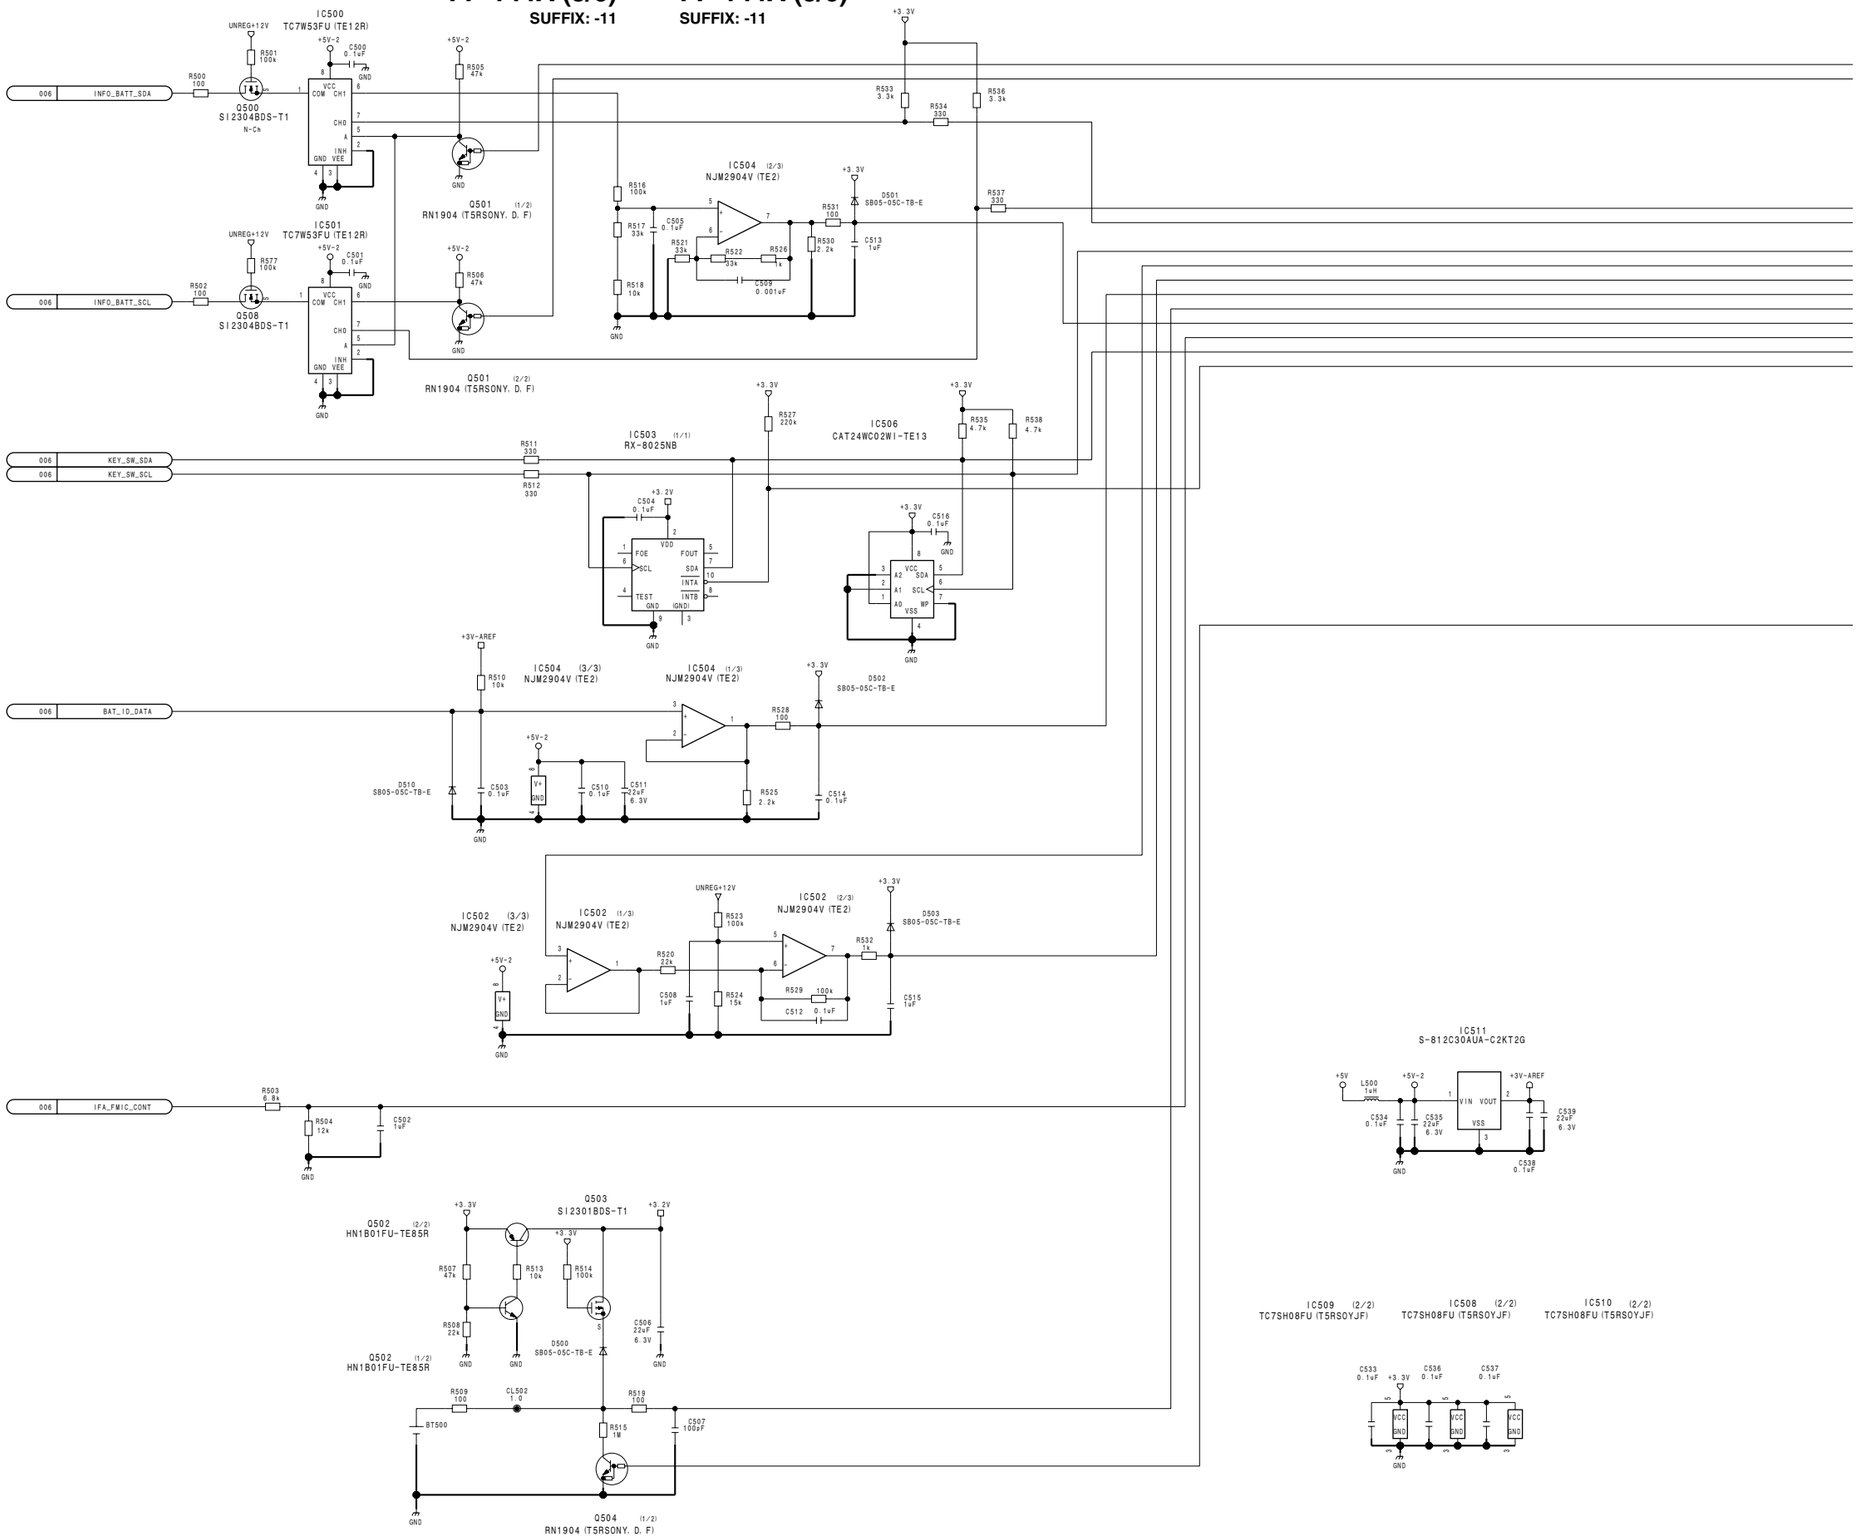

4-106

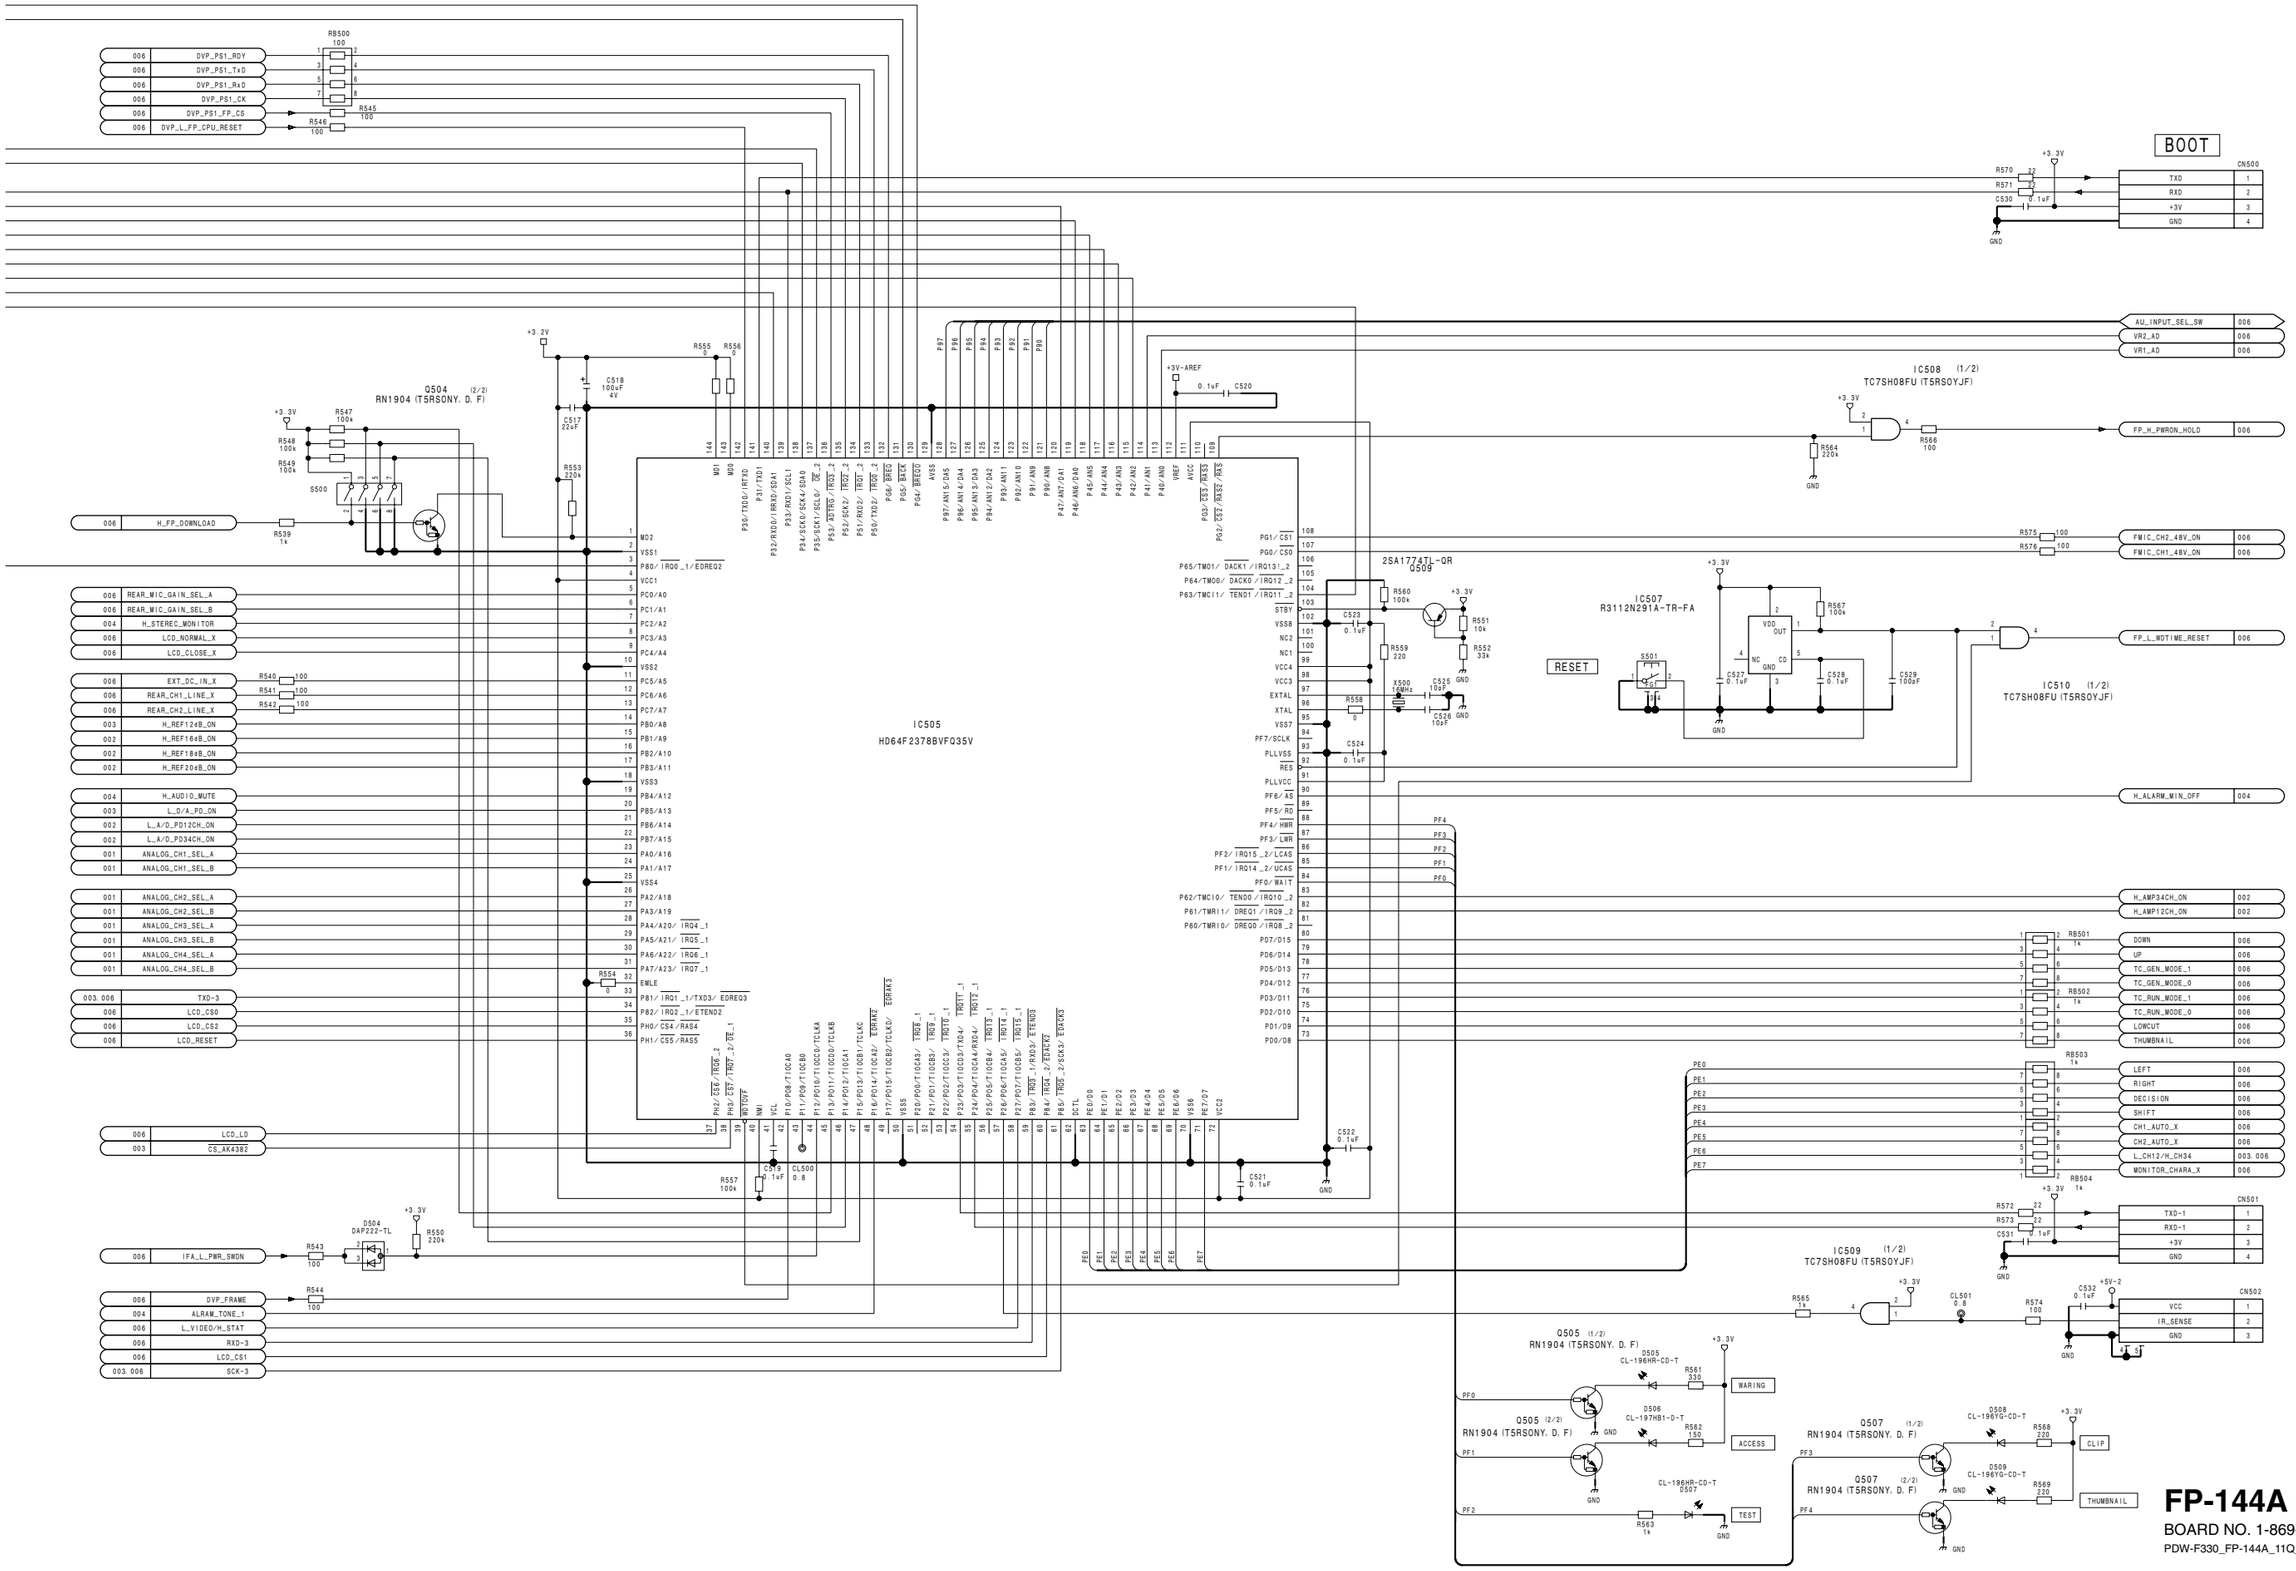

FP-144A (5/6)
BOARD NO. 1-869-661-11
PDW-F330_FP-144A_11Q_5

FP-144A (6/6)
SUFFIX: -11

FP-144A (6/6)
SUFFIX: -11

CN105

1	IFA_FMIC_VR_CONT (G)	IFA_FMIC_CONT	005
2	IFA_FMIC_VR_CONT (X)		
3	GND		
4	FMIC_CH2_48V_ON	FMIC_CH2_48V_ON	005
5	IFA_PWR_SWDN	IFA_L_PWR_SWDN	005
6	FMIC_48V_ON/OFF	FMIC_CH1_48V_ON	005
7	KY_SW_SCL	KEY_SW_SCL	005
8	KY_SW_SDA	KEY_SW_SDA	005
9	DVP_PS1_RDY	DVP_PS1_RDY	005
10	DVP_PS1_CK	DVP_PS1_CK	005
11	DVP_PS1_TxD	DVP_PS1_TxD	005
12	DVP_PS1_RxD	DVP_PS1_RxD	005
13	DVP_PS1_FP_CS	DVP_PS1_FP_CS	005
14	DVP_FRAME	DVP_FRAME	005
15	DVP_L_FP_CPU_RESET	DVP_L_FP_CPU_RESET	005
16	FP_L_WDTIME_RESET	FP_L_WDTIME_RESET	005
17	DVP_FP_CHAR_BLK	CHAR_BLK	006
18	DVP_FP_CHAR_R	CHAR_R	006
19	DVP_FP_CHAR_G	CHAR_G	006
20	DVP_FP_CHAR_B	CHAR_B	006
21	GND		
22	FP_REC_AU_D34	FP_REC_AU_D34	002
23	FP_REC_AU_D12	FP_REC_AU_D12	002
24	DVP_PB_AU_D34	DVP_PB_AU_D34	003
25	DVP_PB_AU_D12	DVP_PB_AU_D12	003
26	GND		
27	DVP_FP_AU_FS	DVP_FP_AU_FS	006
28	DVP_FP_AU_64FS	DVP_FP_AU_64FS	006
29	DVP_FP_AU_256FS	DVP_FP_AU_256FS	006
30	GND		

32 31

GND

CN107

1	FP_AU_PB1 (G)	FP_AU_PB1 (X)	003
2	FP_AU_PB1 (X)	FP_AU_PB1 (Y)	003
3	FP_AU_PB1 (Y)		
4	FP_AU_PB2 (G)		
5	FP_AU_PB2 (X)	FP_AU_PB2 (X)	003
6	FP_AU_PB2 (Y)	FP_AU_PB2 (Y)	003
7	GND		
8	AA_MIC_GAIN_SEL	MIC_GAIN_SEL	006
9	RESERVED		
10	BAT_ID_DATA	BAT_ID_DATA	005
11	INFO_BATT_SCL	INFO_BATT_SCL	005
12	GND		
13	INFO_BATT_SDA	INFO_BATT_SDA	005
14	GND		
15	INPUT_CH1_LINE	REAR_CH1_LINE_X	005
16	INPUT_CH2_LINE	REAR_CH2_LINE_X	005
17	CNB_L_EX_DCIN	EXT_DC_IN_X	005
18	FP_H_PWRON_HOLD	FP_H_PWRON_HOLD	005
19	GND		
20	+15.5V		
21	UNREG+12V		
22	-5V		
23	-5V		
24	GND		
25	GND		
26	+5V		
27	+5V		
28	+3.3V		
29	+3.3V		
30	GND		

CL601 0.8

+15.5V

UNREG+12V

+5V

-5V

+3.3V

L600 1uH

C601 22uF

C616 22uF C617 22uF

32 31

GND

IC601
TC74LCX245FT (EKJ)

+3.3V

C602 0.1uF

GND

R612 22k R615 22k R616 22k

006	DVP_FP_AU_256FS	2	A1	B1	18 R618 47 — 256_FS1 — 002
		3	A2	B2	17 R619 47 — 256_FS2 — 003
006	DVP_FP_AU_64FS	4	A3	B3	16
		5	A4	B4	15 R620 47 — 64_FS1 — 002
006	DVP_FP_AU_FS	6	A5	B5	14 R621 47 — 64_FS2 — 003
		7	A6	B6	13
		8	A7	B7	12 — FS_1 — 002
		9	A8	B8	11 — FS_2 — 003
		20	VCC		
		19	OE		
		1	DIR		
		10	GND		

GND

Q602 (1/2)
RN4904 (T5RSONY. D. F)

Q602 (2/2)
RN4904 (T5RSONY. D. F)

+5V

005 REAR_MIC_GAIN_SEL_B

005 REAR_MIC_GAIN_SEL_A

GND

D600 SB05-05C-TB-E

R617 1k — MIC_GAIN_SEL — 006

CN106

1	GND		
2	H_FP_DOWNLOAD	H_FP_DOWNLOAD	005
3	MA_FMIC1 (G)		
4	MA_FMIC1 (X)	FRONT_MIC1_X	001
5	MA_FMIC1 (Y)	FRONT_MIC1_Y	001
6	MA_FMIC2 (G)		
7	MA_FMIC2 (X)	FRONT_MIC2_X	001
8	MA_FMIC2 (Y)	FRONT_MIC2_Y	001
9	GND		
10	FP_SW_SCL		
11	DCP_SW_SDA		
12	FP_RTRY_B		
13	FP_RTRY_A		
14	FP_L_RTRY_PUSH		
15	GND		
16	LCD_VD	LCD_VD	006
17	LCD_HD	LCD_HD	006
18	LCD_B_VIDEO	LCD_B_VIDEO	006
19	LCD_R_VIDEO	LCD_R_VIDEO	006
20	LCD_G_VIDEO	LCD_G_VIDEO	006
21	GND		
22	WRR_CA_AU (X)	WRR_CA_AU_X	001
23	WRR_CA_AU (Y)	WRR_CA_AU_Y	001
24	WRR_CA_AU (G)		
25	AA_CH1_MIC/LINE (X)	AXM_CH1_MIC/LINE_X	001
26	AA_CH1_MIC/LINE (Y)	AXM_CH1_MIC/LINE_Y	001
27	AA_CH1_MIC/LINE (G)		
28	AA_CH2_MIC/LINE (X)	AXM_CH2_MIC/LINE_X	001
29	AA_CH2_MIC/LINE (Y)	AXM_CH2_MIC/LINE_Y	001
30	AA_CH2_MIC/LINE (G)		

32 31

GND

R600 100k R601 100k

C600 0.1uF

GND

+3.3V

IC600
PCA9555DB-118

23	SDA	24	VDD
3	A2	4	I/O0.0
2	A1	5	I/O0.1
21	A0	6	I/O0.2
		7	I/O0.3
		8	I/O0.4
22	SCL	9	I/O0.5
		10	I/O0.6
		11	I/O0.7
		13	I/O1.0
		14	I/O1.1
		15	I/O1.2
		16	I/O1.3
		17	I/O1.4
		18	I/O1.5
		19	I/O1.6
		20	I/O1.7
		1	INT
		12	VSS

R602 100
R603 100
R604 100

RB600 1k
RB601 1k

R605 1k
R606 220
R607 220
R608 220
R609 1k
R610 1k
R611 1k

R613 0
R614 0

GND

CN600

GND	1	
ROTARY_PUSH	2	
ROTARY_A	3	
ROTARY_B	4	
STBY/SAVE	5	
GAIN_LOW	6	
GAIN_HIGH	7	
DCC_ON	8	
BARS	9	
WHITE_B	10	
WHITE_PRESET	11	
STATUS	12	
MENU	13	

CN601

LED_1	1
LED_2	2
LED_3	3
SW_1	4
SW_2	5
SW_3	6
GND	7

4-108

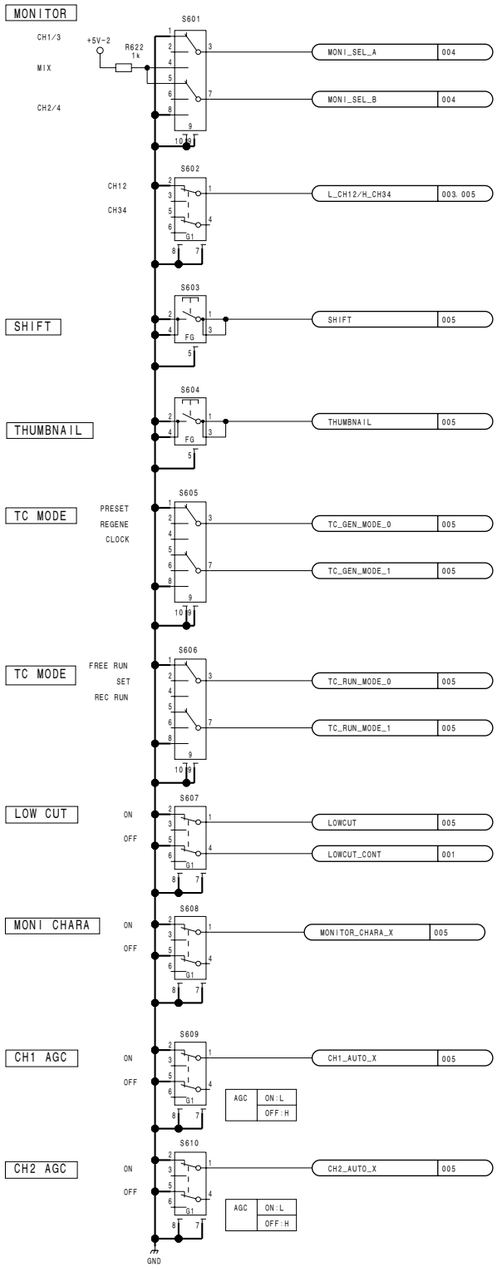
MONITOR
CH1/3
MIX
CH2/4
+5V-2
R622 1k
S601
MONI_SEL_A 004
MONI_SEL_B 004
S602
CH12
CH34
L_CH12/H_CH34 003. 005
SHIFT
S603
SHIFT 005
THUMBNAIL
S604
THUMBNAIL 005
TC MODE
PRESET
REGENE
CLOCK
S605
TC_GEN_MODE_0 005
TC_GEN_MODE_1 005
TC MODE
FREE RUN
SET
REC RUN
S606
TC_RUN_MODE_0 005
TC_RUN_MODE_1 005
LOW CUT
ON
OFF
S607
LOWCUT 005
LOWCUT_CONT 001
MONI CHARA
S608
MONITOR_CHARA_X 005
CH1 AGC
S609
CH1_AUTO_X 005
AGC ON:L OFF:H
CH2 AGC
S610
CH2_AUTO_X 005
AGC ON:L OFF:H
GND

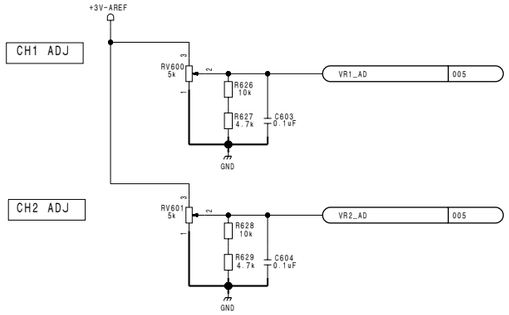
+3V-AREF
CH1 ADJ
RV600 5k
R626 10k
R627 4.7k
C603 0.1uF
VR1_AD 005
GND
CH2 ADJ
RV601 5k
R628 10k
R629 4.7k
C604 0.1uF
VR2_AD 005
GND

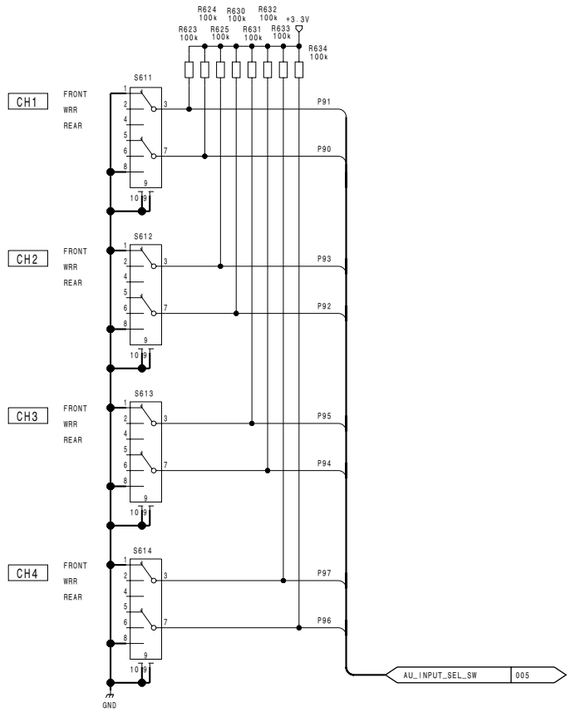
R623 100k
R624 100k
R625 100k
R630 100k
R631 100k
R632 100k
R633 100k
+3.3V
R634 100k
CH1
FRONT
WRR
REAR
S611
P91
P90
CH2
S612
P93
P92
CH3
S613
P95
P94
CH4
S614
P97
P96
AU_INPUT_SEL_SW 005
GND

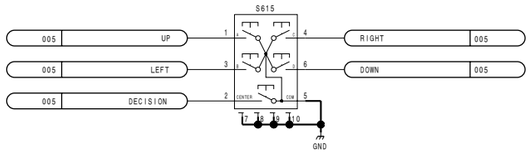
S615
005 UP
005 LEFT
005 DECISION
RIGHT 005
DOWN 005
CENTER
COM
GND

FP-144A (6/6)
SUFFIX: -11

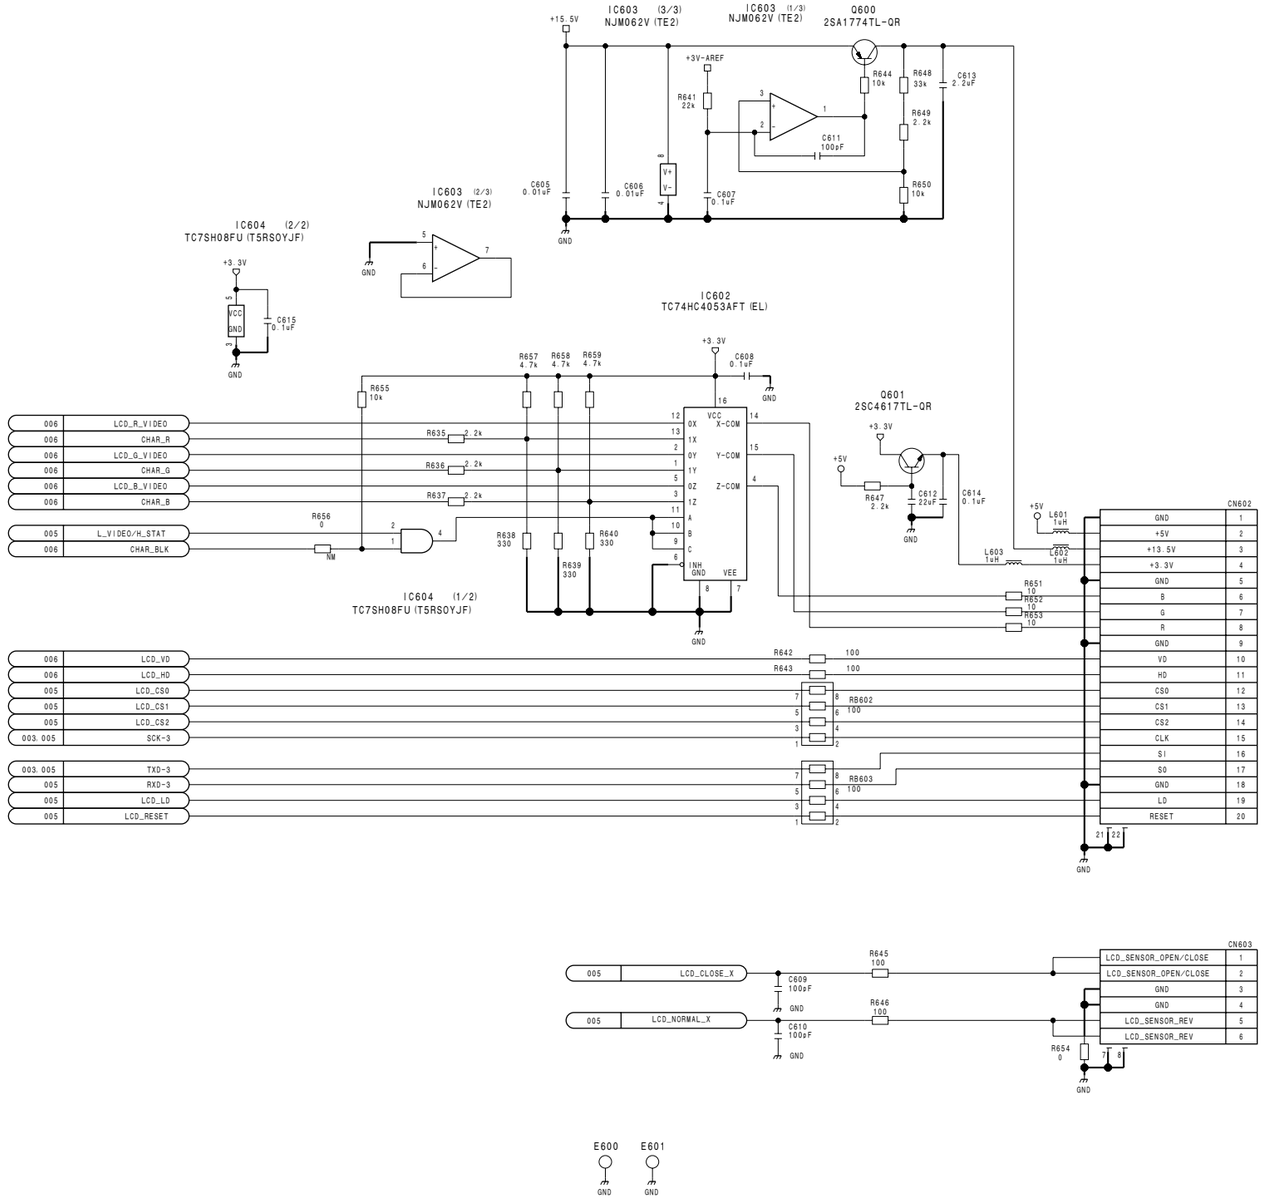

4-110

FP-144A (6/6)
BOARD NO. 1-869-661-11
PDW-F330_FP-144A_11Q_6

PDW-F330/V2 (J,E)

GCN-17
SUFFIX: -11

KSW-51
SUFFIX: -11

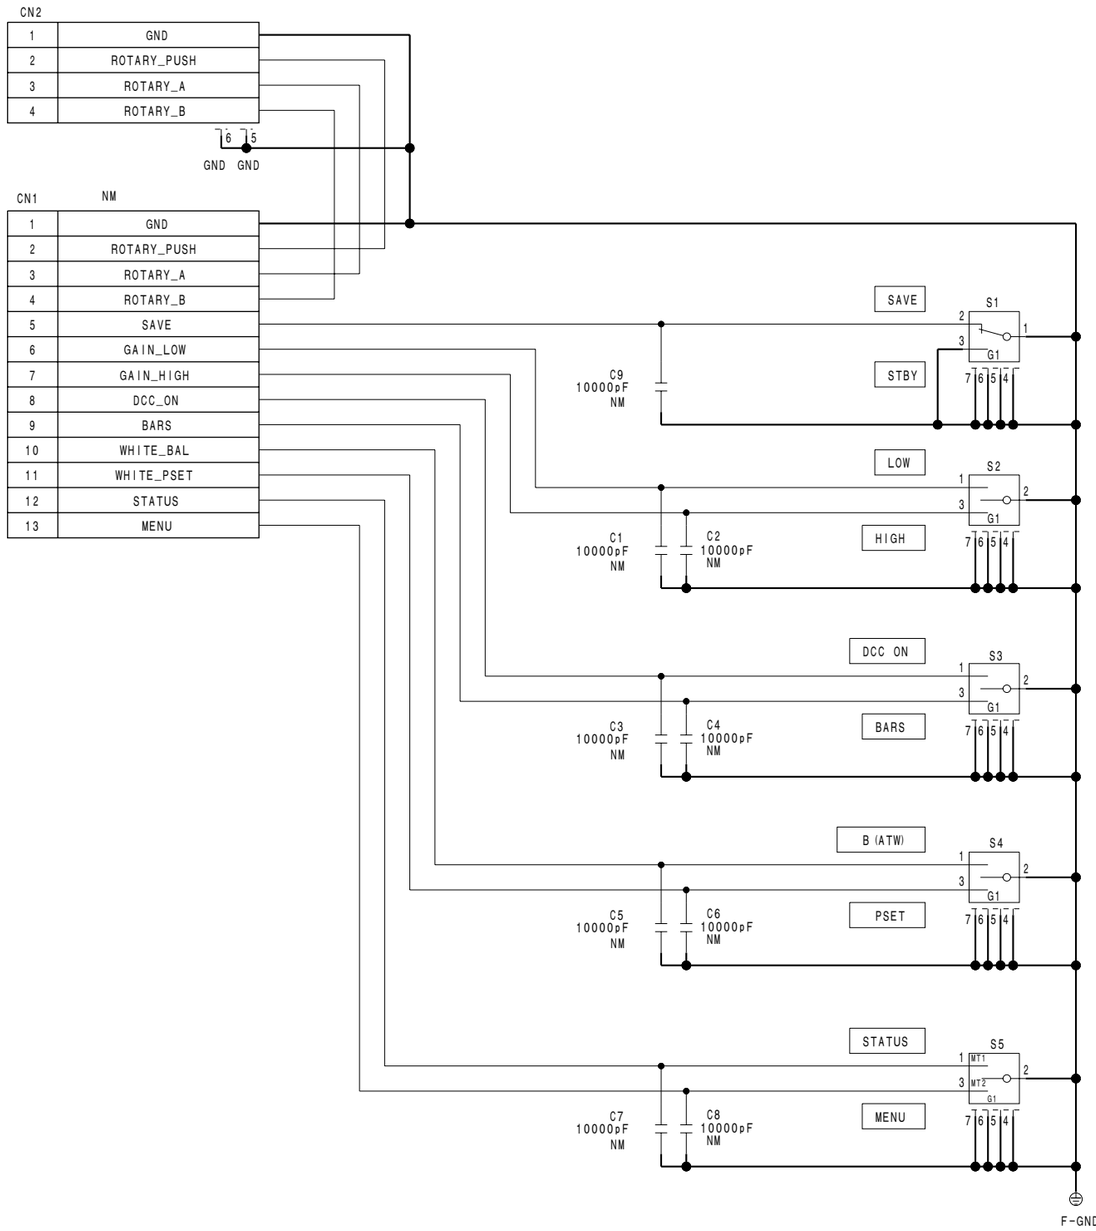

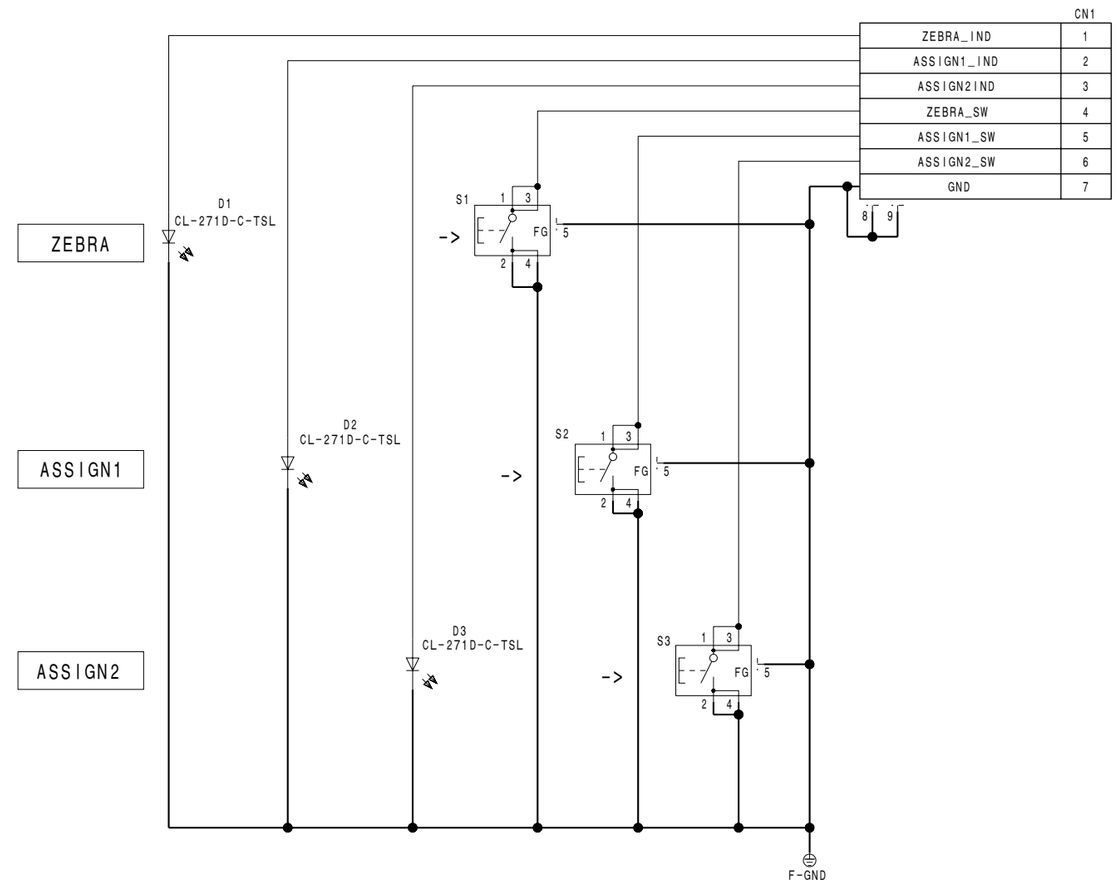

1 2 3 4 5

GCN-17
BOARD NO. 1-869-510-11
PDW-F330K_GCN-17_110_1

KSW-51
BOARD NO. 1-869-488-11
PDW-F330K_KSW-51_111_1

A B C D E F G H

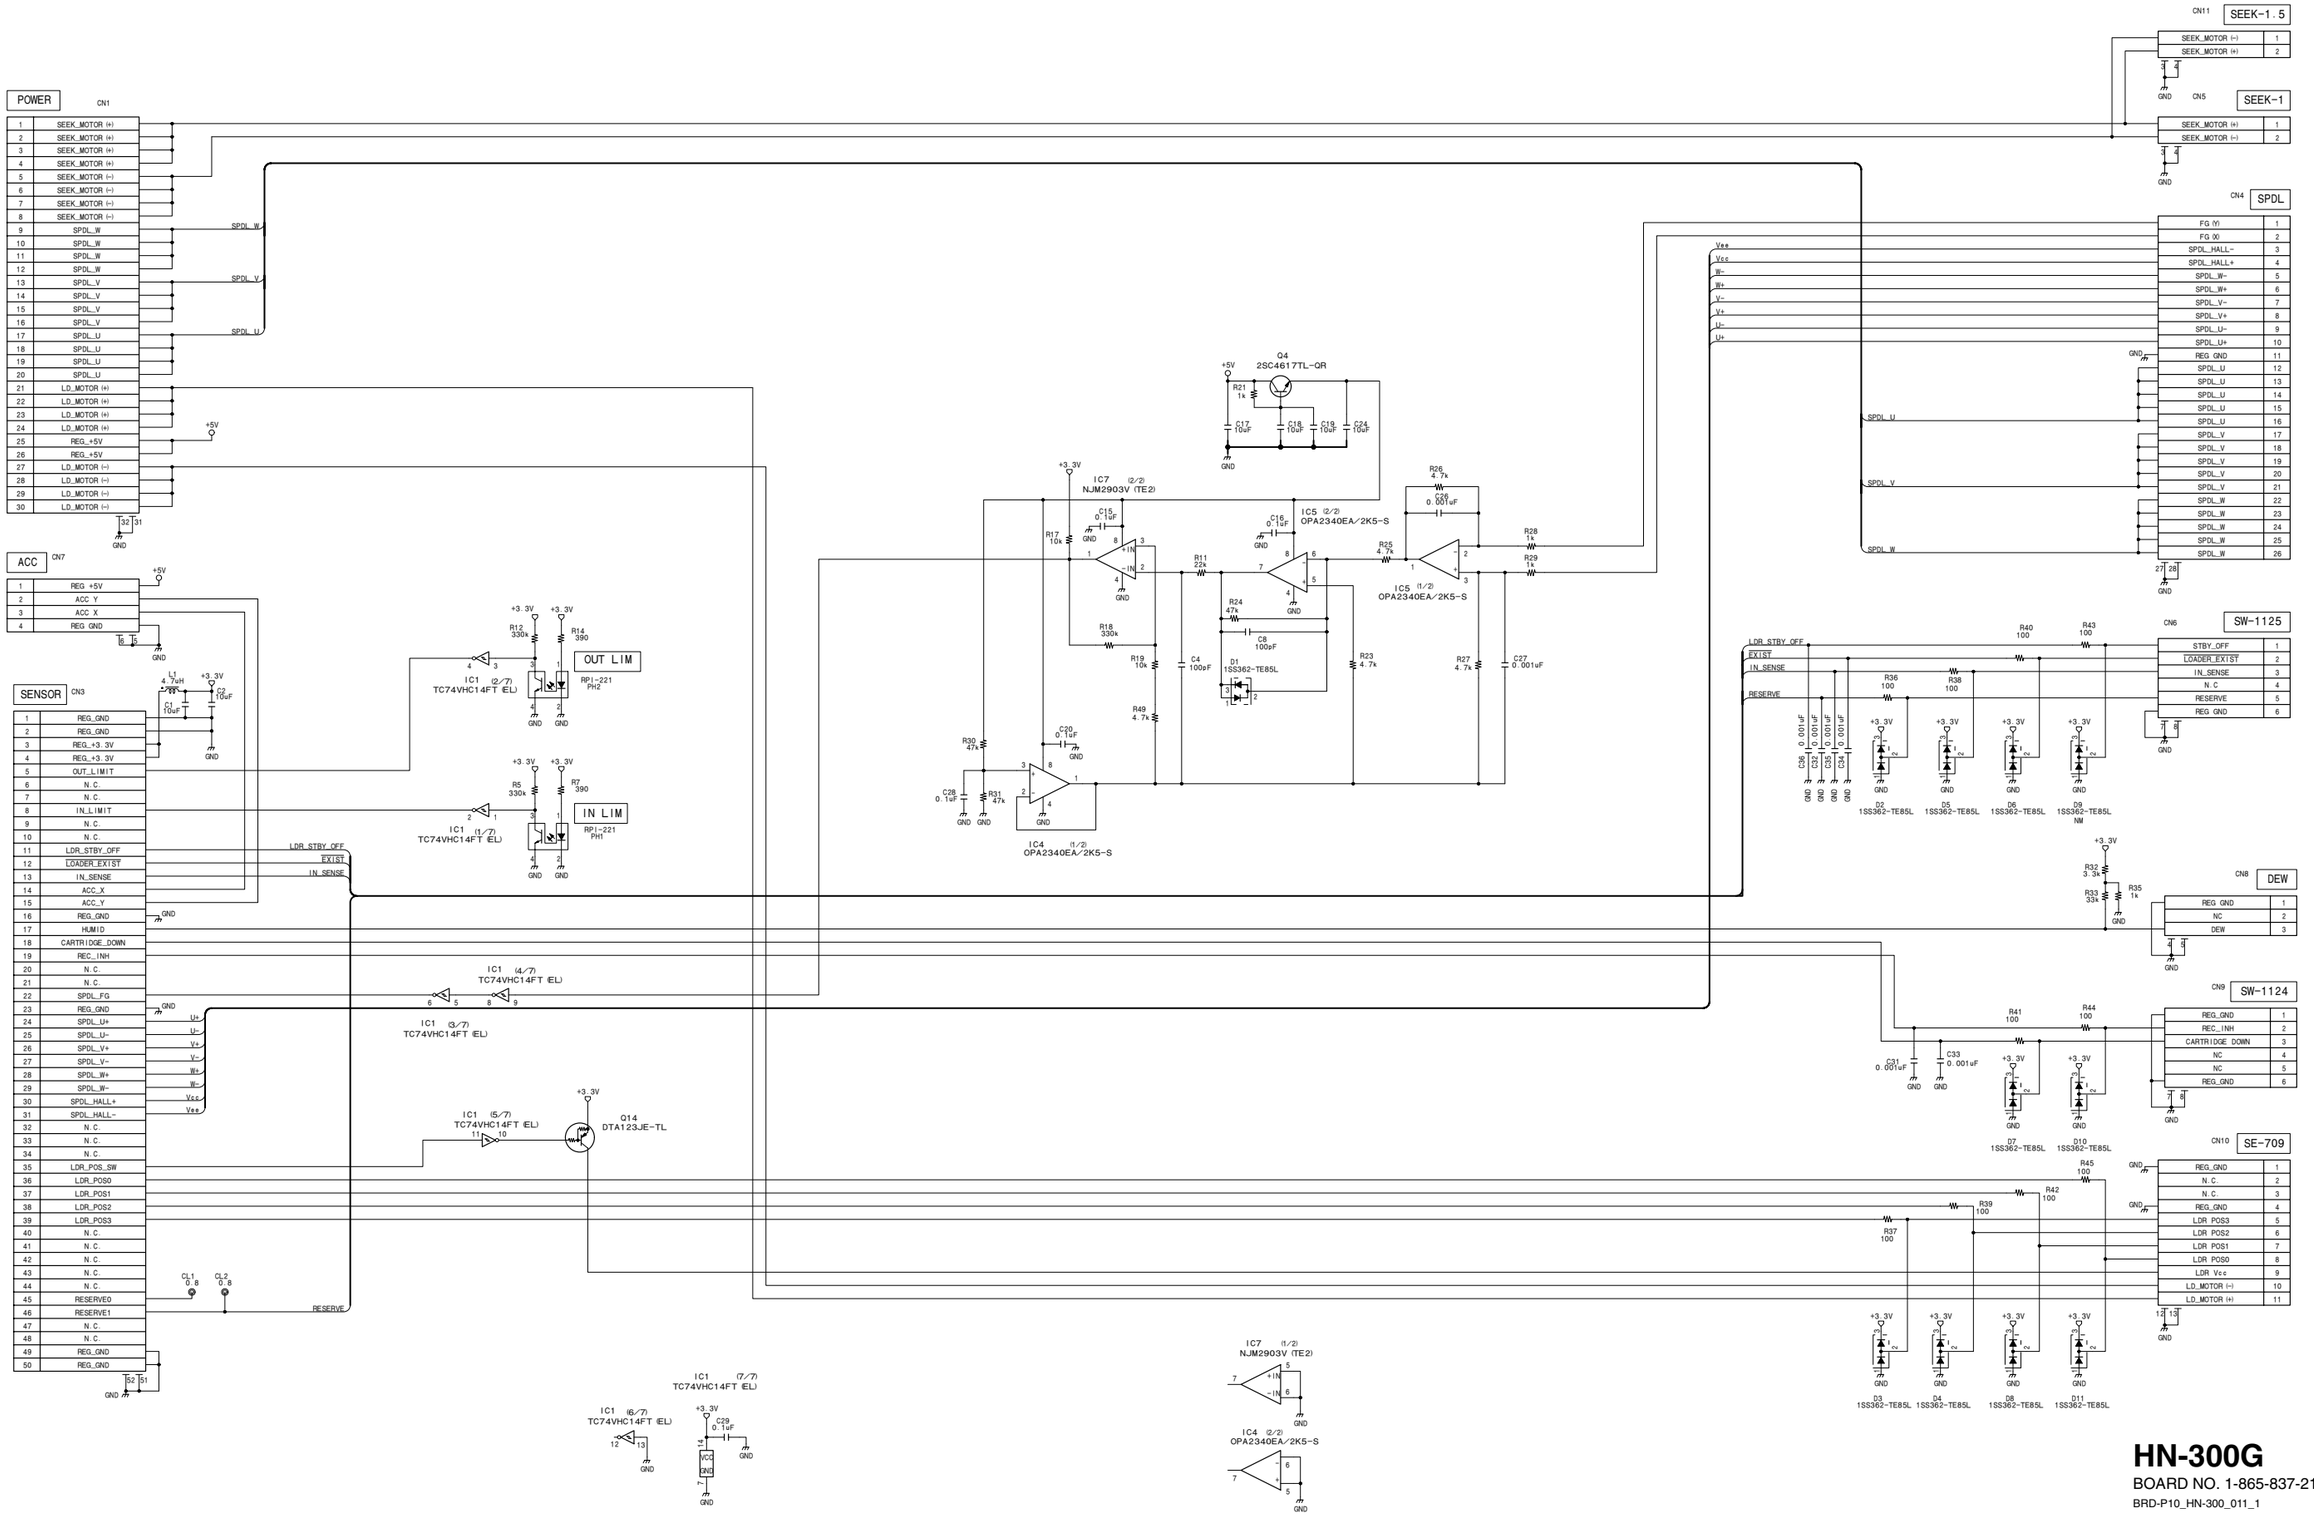

HN-300G

BOARD NO. 1-865-837-21

BRD-P10_HN-300_011_1

HP-124, IO-228, IR-36, JK-73
SUFFIX: -11 SUFFIX: -11 SUFFIX: -11 SUFFIX: -11

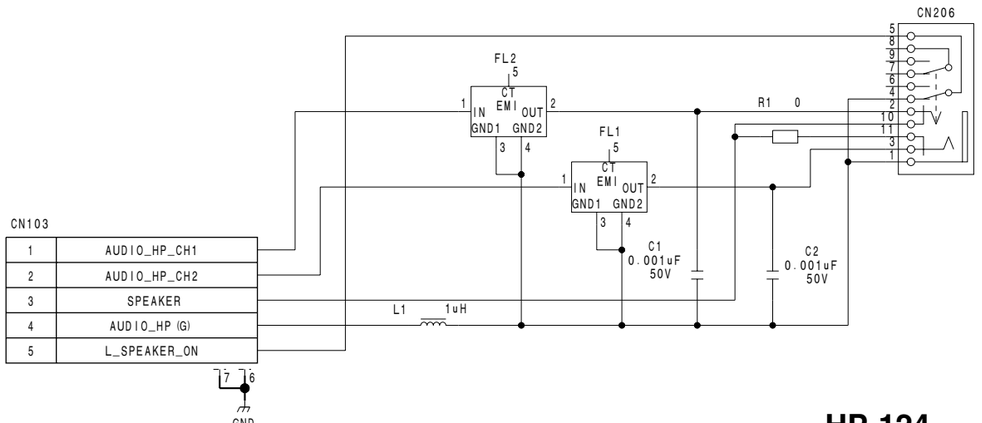

HP-124

BOARD NO. 1-869-498-11

PDW-F330K_HP-124_110_1

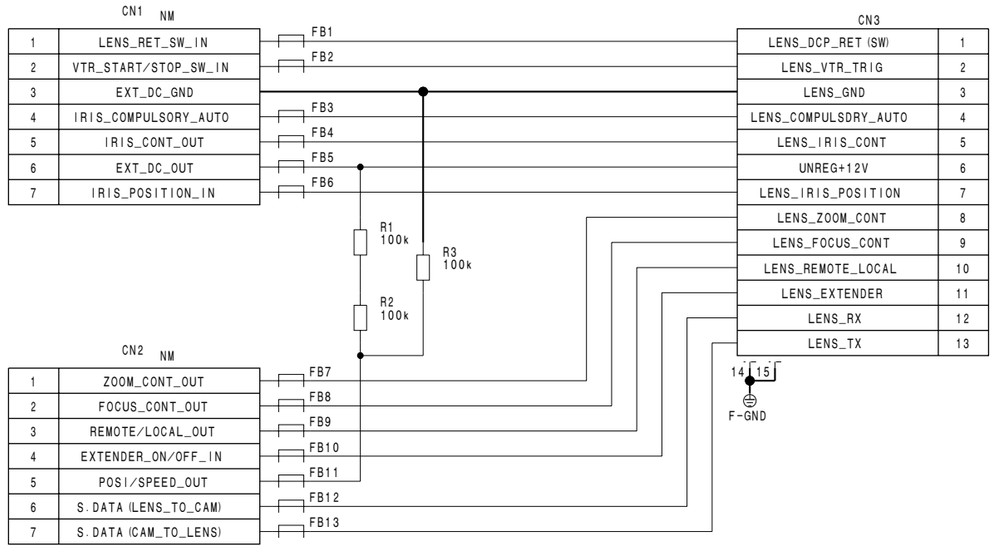

IR-36

BOARD NO. 1-869-517-11

PDW-F330K_IR-36_110_1

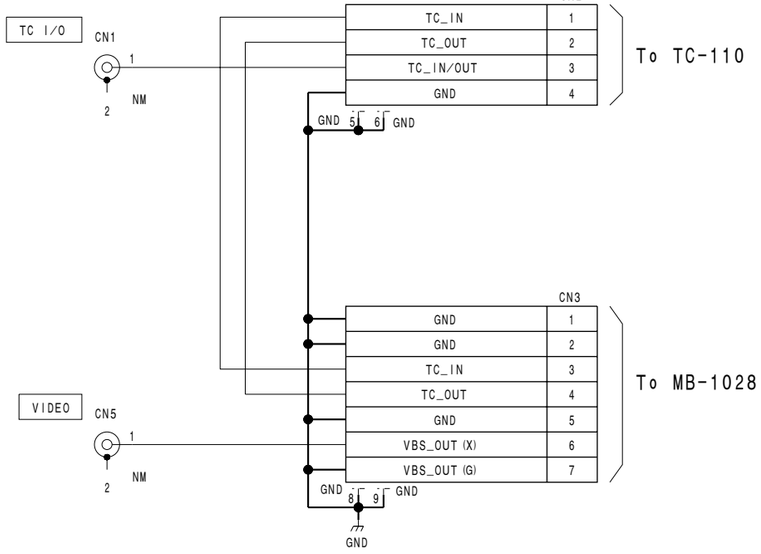

IO-228

BOARD NO. 1-869-483-11

PDW-F330K_IO-228_111_1

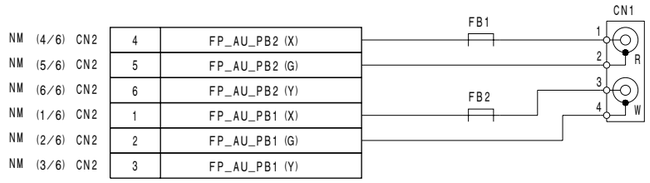

JK-73

BOARD NO. 1-869-504-11

PDW-F330K_JK-73_110_1

KY-573, LGT-12, LED-428
SUFFIX: -12 SUFFIX: -11 SUFFIX: -11

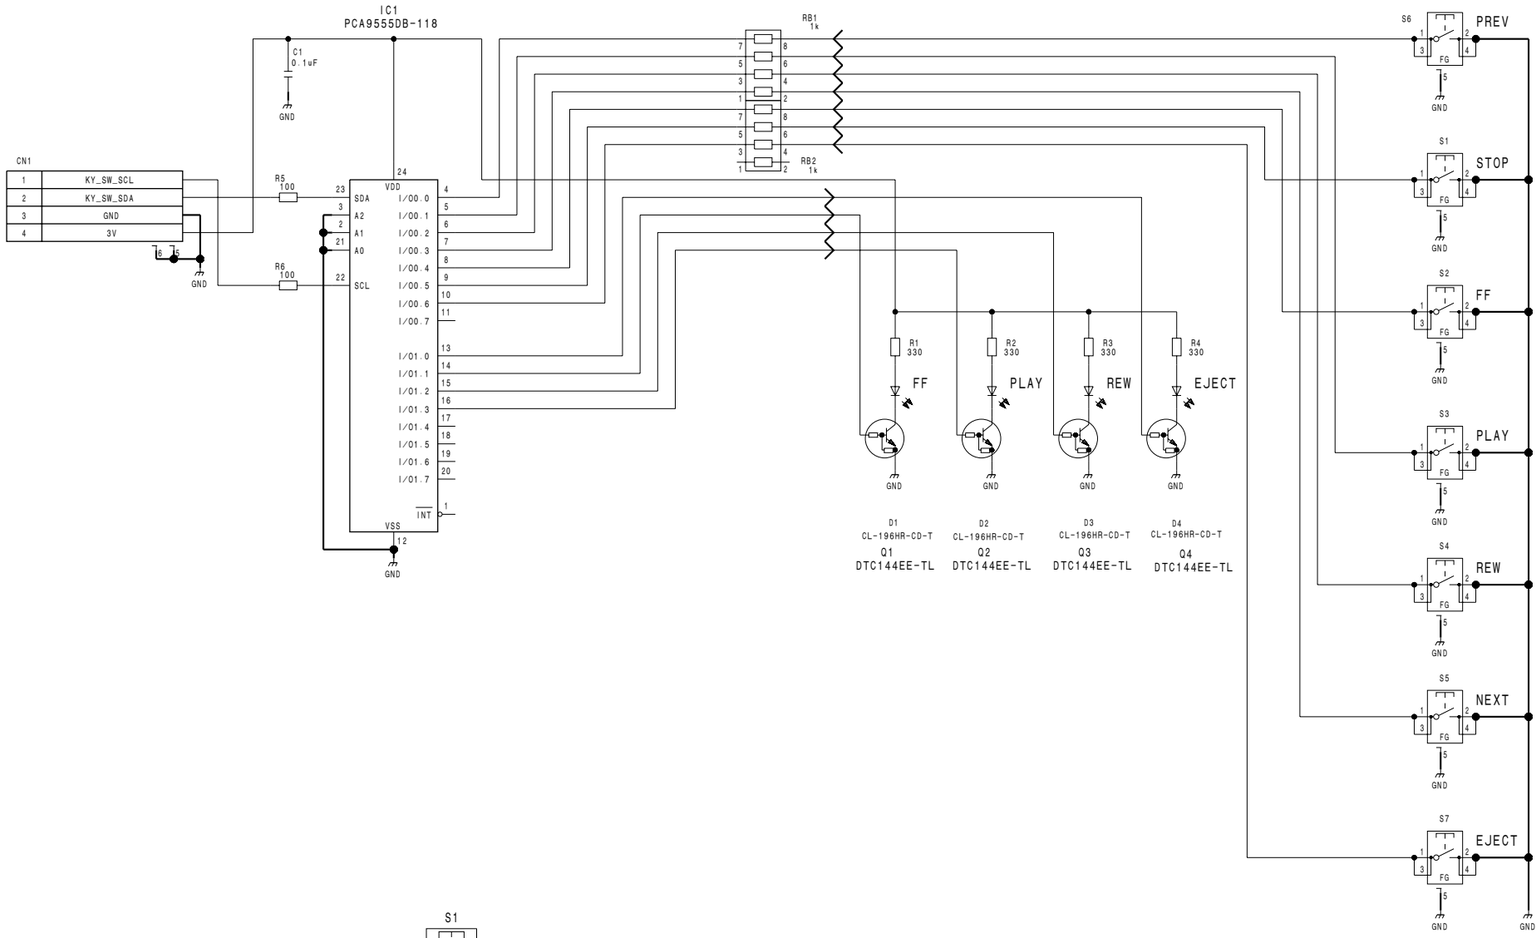

KY-573

BOARD NO. 1-869-809-12

PDW-F350_KY-573_12F_1

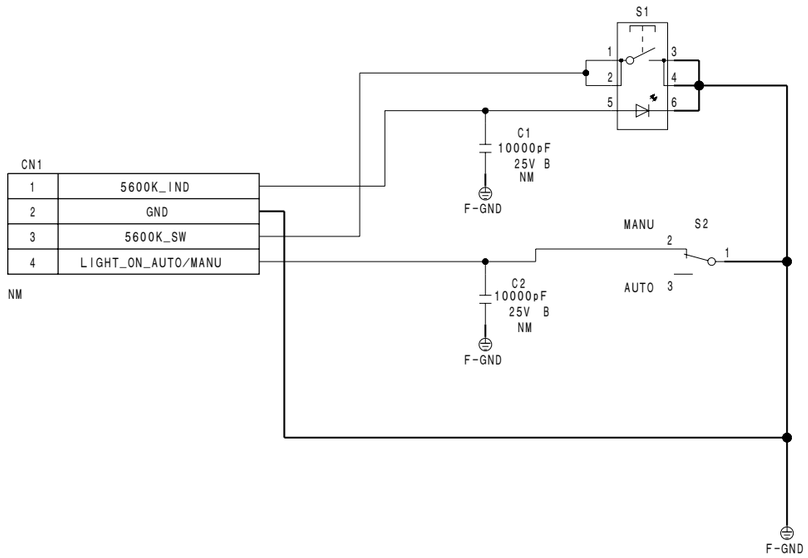

LGT-12

BOARD NO. 1-869-509-11

PDW-F330K_LGT-12_110_1

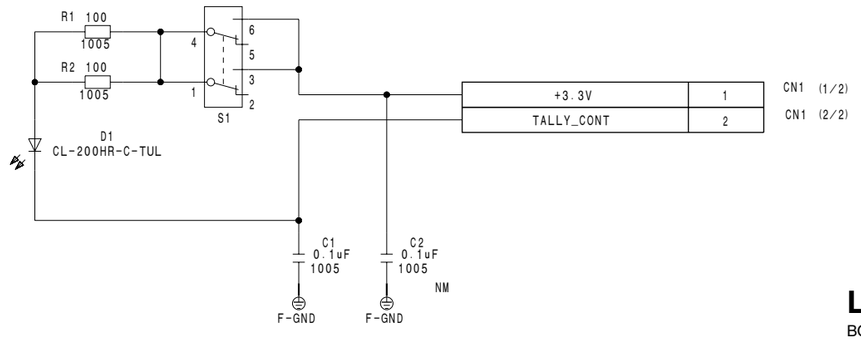

LED-428

BOARD NO. 1-869-506-11

PDW-F330K_LED-428_110_1

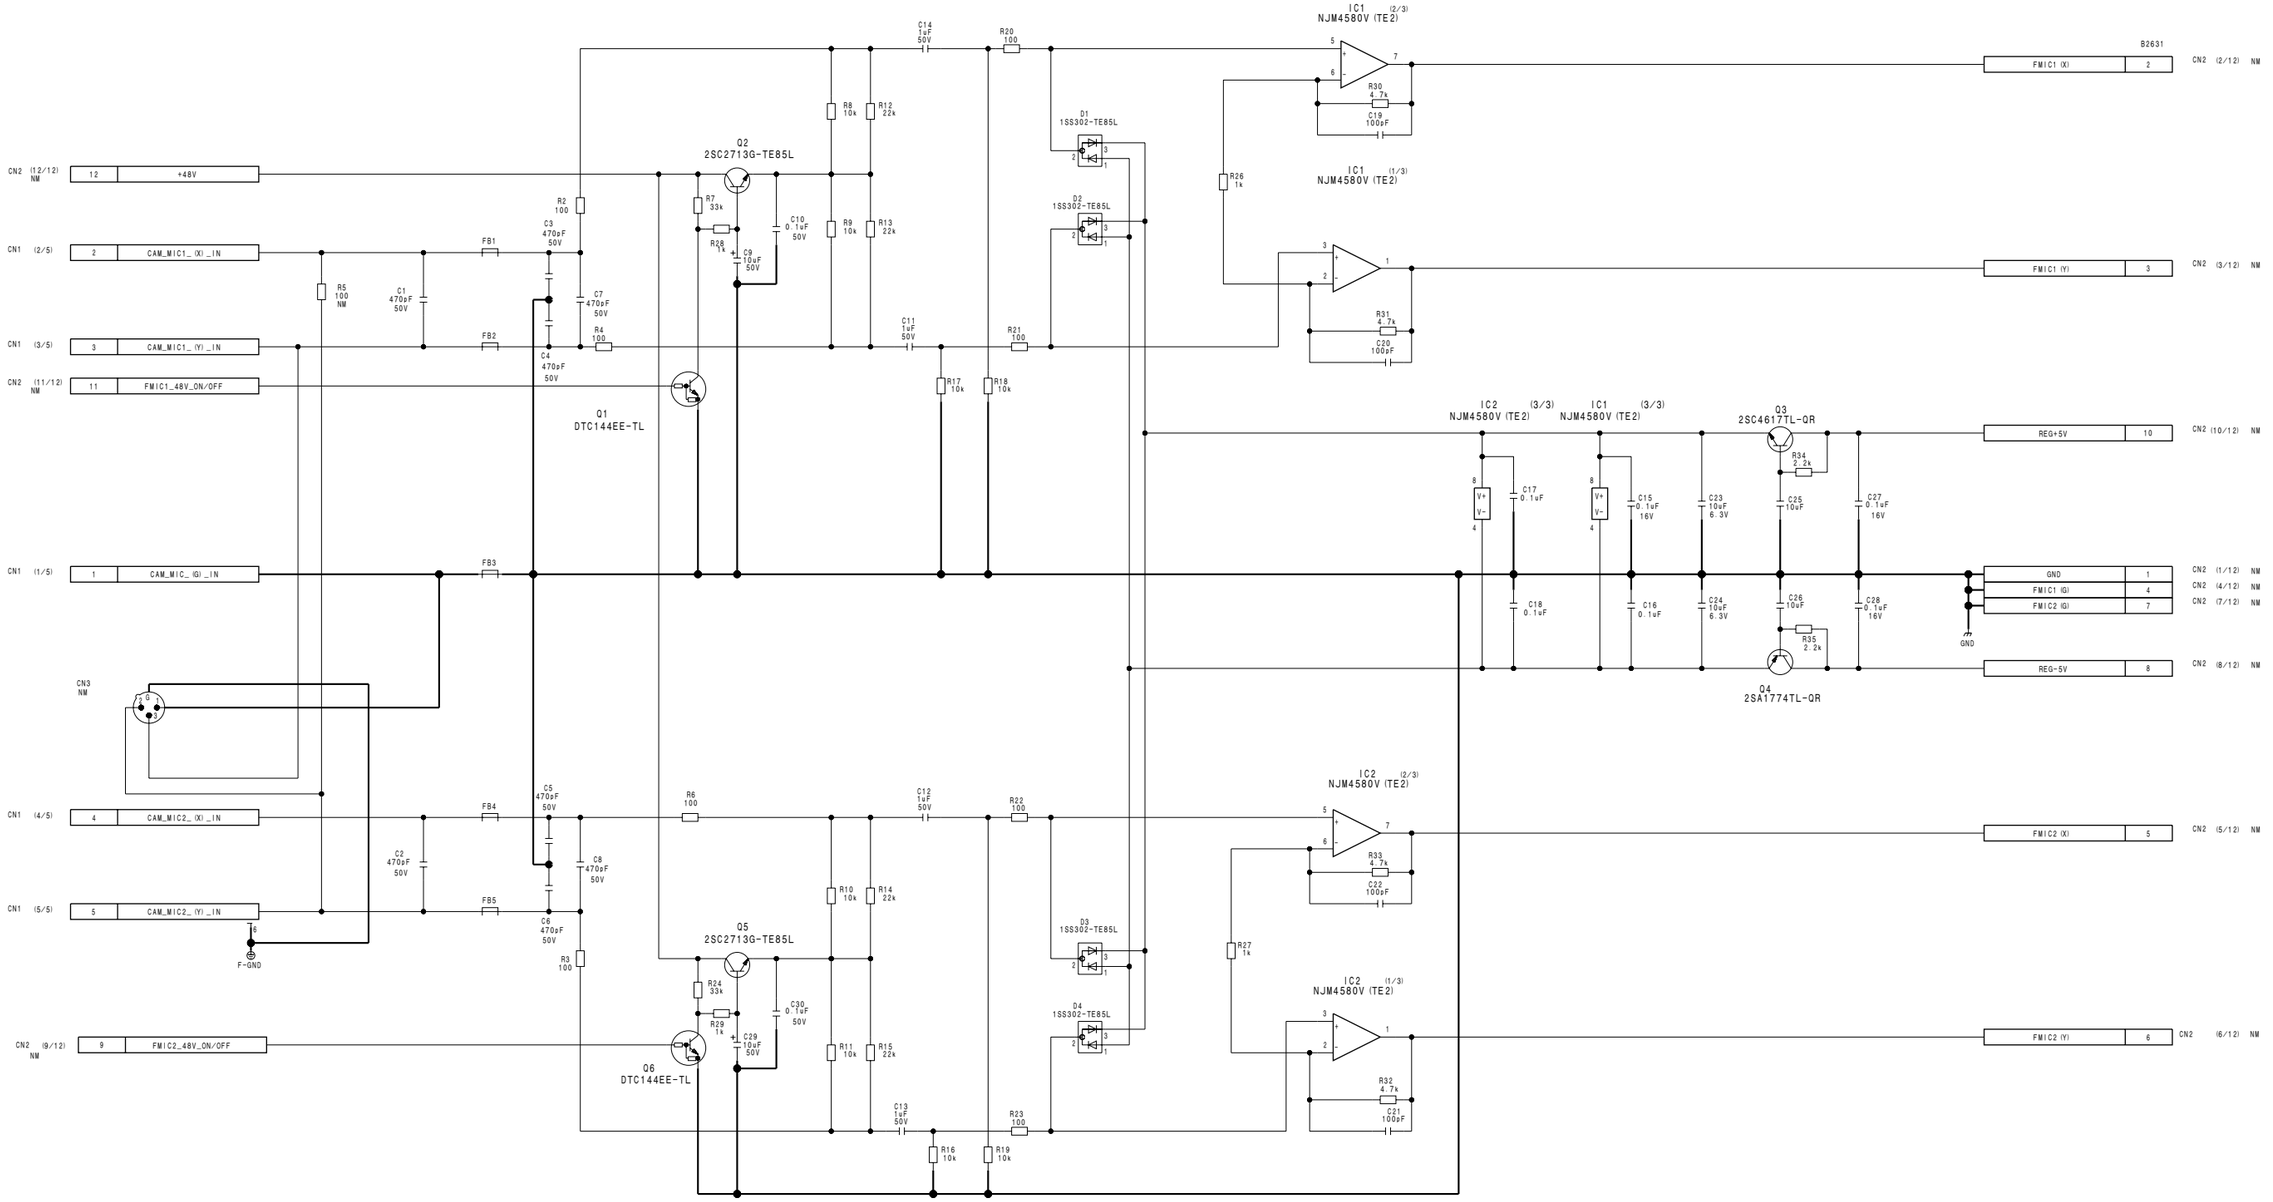

MA-136
BOARD NO. 1-869-499-11
PDW-F330K_MA-136_111_1

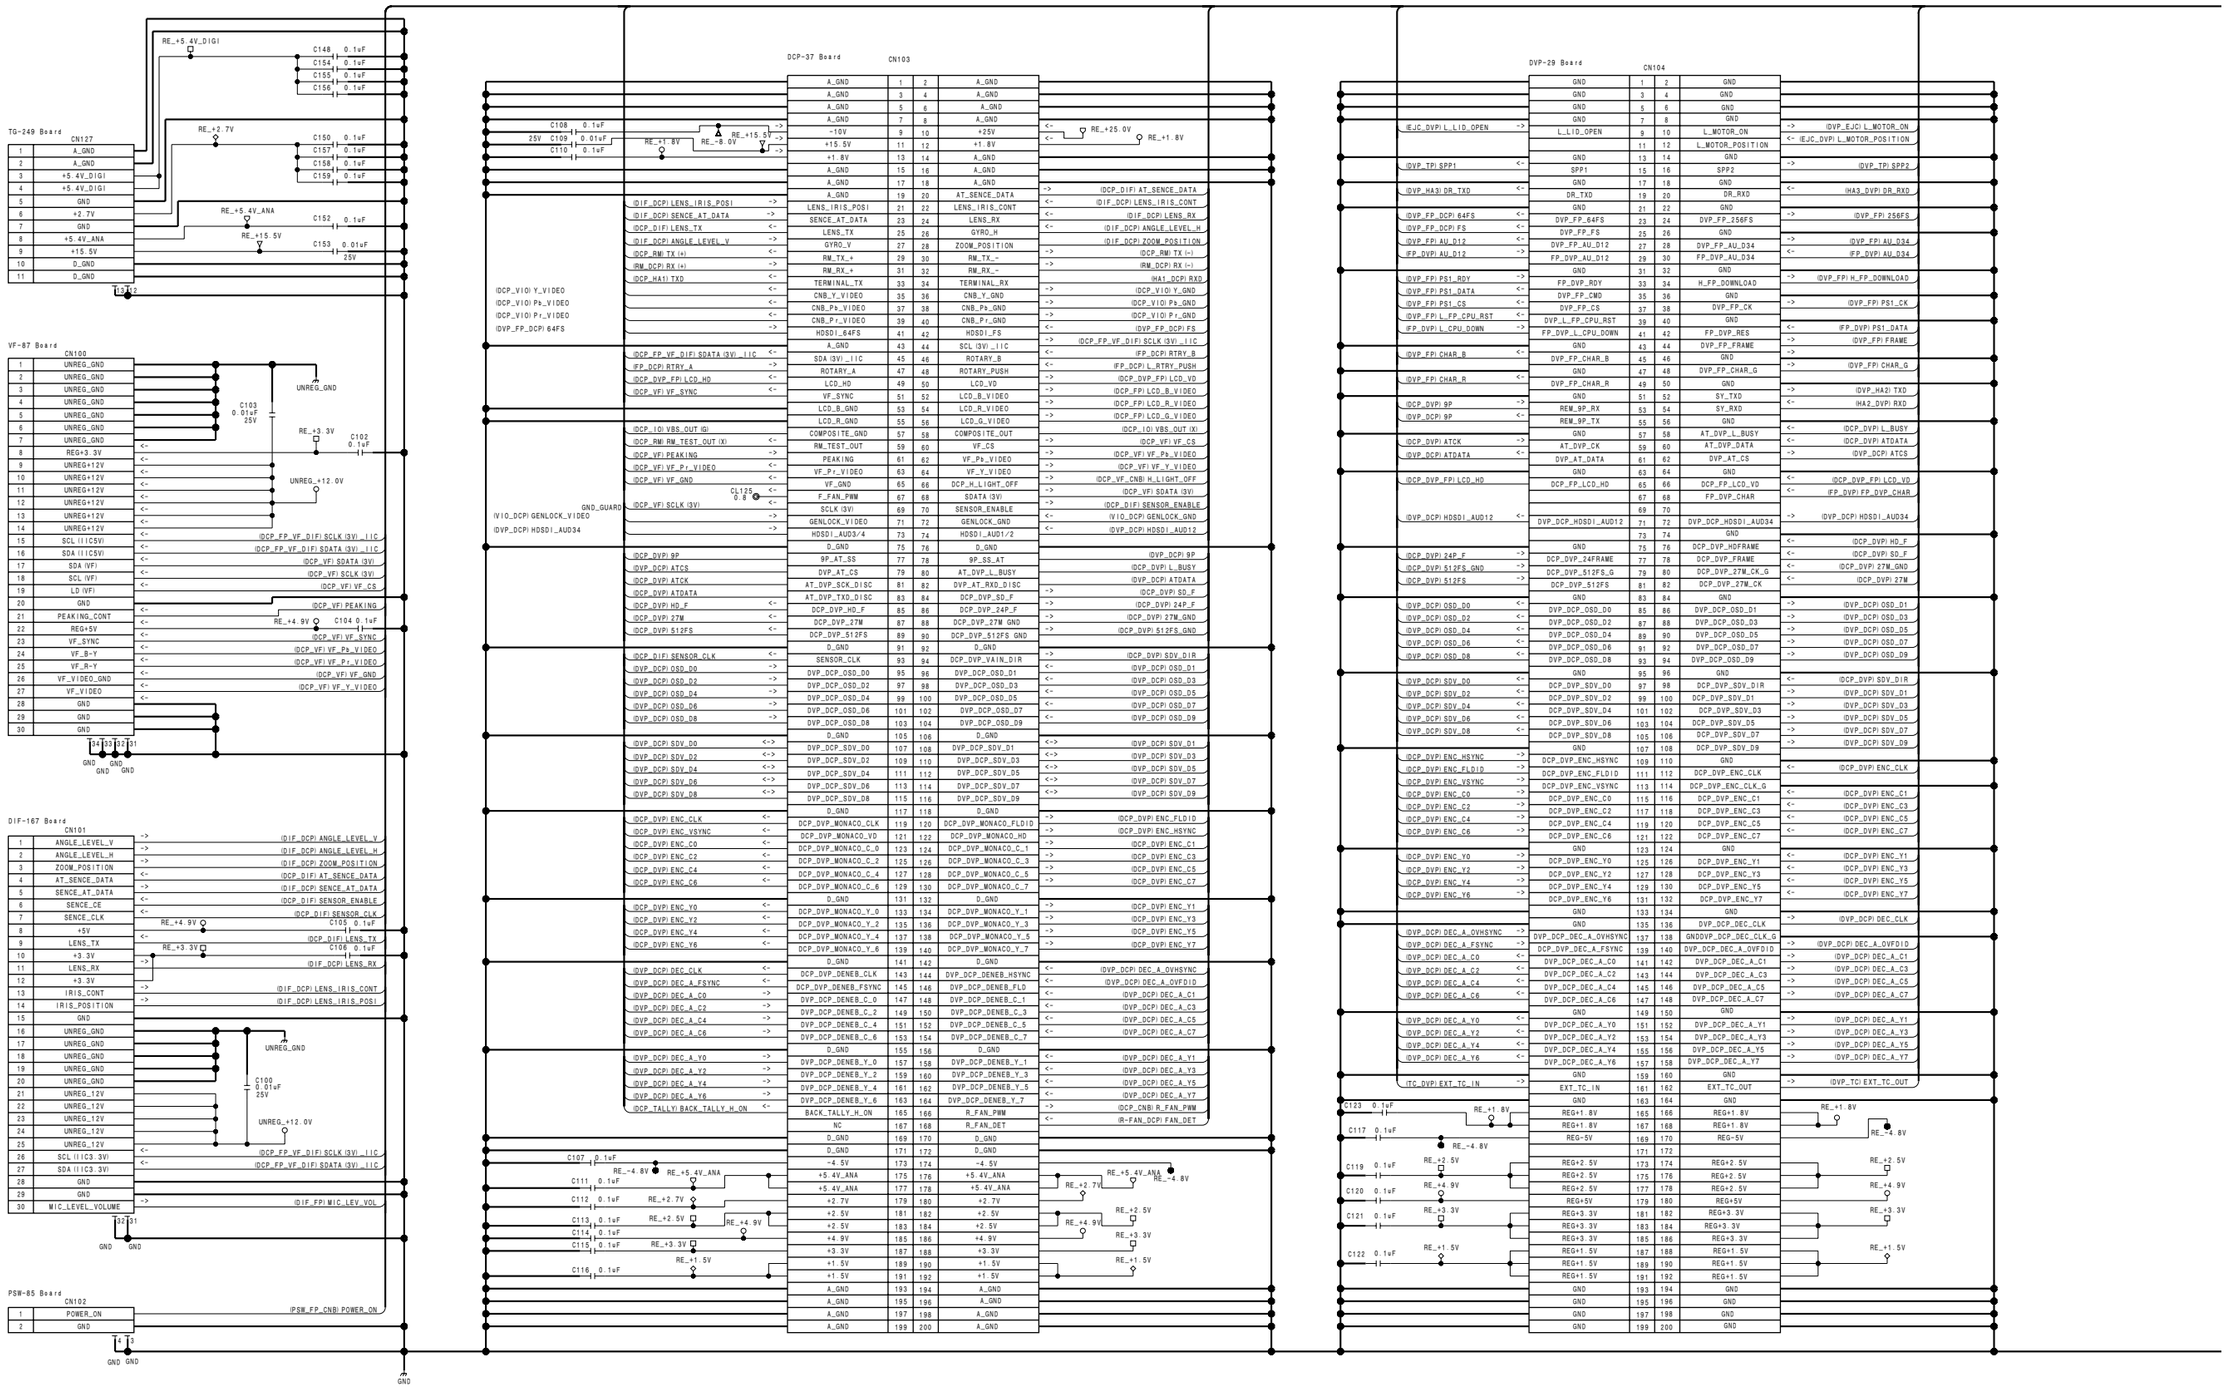
TG-249 Board
CN127
1 A_GND
2 A_GND
3 +5.4V_DIGI
4 +5.4V_DIGI
5 GND
6 +2.7V
7 GND
8 +5.4V_ANA
9 +15.5V
10 D_GND
11 D_GND
RE_+5.4V_DIGI
RE_+2.7V
RE_+5.4V_ANA
RE_+15.5V
C148 0.1uF
C154 0.1uF
C155 0.1uF
C156 0.1uF
C150 0.1uF
C157 0.1uF
C158 0.1uF
C159 0.1uF
C152 0.1uF
C153 0.01uF 25V
VF-87 Board
CN100
UNREG_GND
UNREG_+12.0V
RE_+3.3V
C102 0.1uF
C103 0.01uF 25V
RE_+4.9V
C104 0.1uF
DIF-167 Board
CN101
RE_+3.3V
C105 0.1uF
C106 0.1uF
C100 0.01uF 25V
PSW-85 Board
CN102
POWER_ON
GND
DCP-37 Board
CN103
C108 0.1uF
C109 0.01uF 25V
C110 0.1uF
RE_+1.8V
RE_-8.0V
RE_+15.5V
RE_+25.0V
C107 0.1uF
C111 0.1uF
C112 0.1uF
C113 0.1uF
C114 0.1uF
C115 0.1uF
C116 0.1uF
RE_-4.8V
RE_+2.7V
RE_+2.5V
RE_+4.9V
RE_+3.3V
RE_+1.5V
DVP-29 Board
CN104
C123 0.1uF
C117 0.1uF
C119 0.1uF
C120 0.1uF
C121 0.1uF
C122 0.1uF
RE_+1.8V
RE_-4.8V
RE_+2.5V
RE_+4.9V
RE_+3.3V
RE_+1.5V

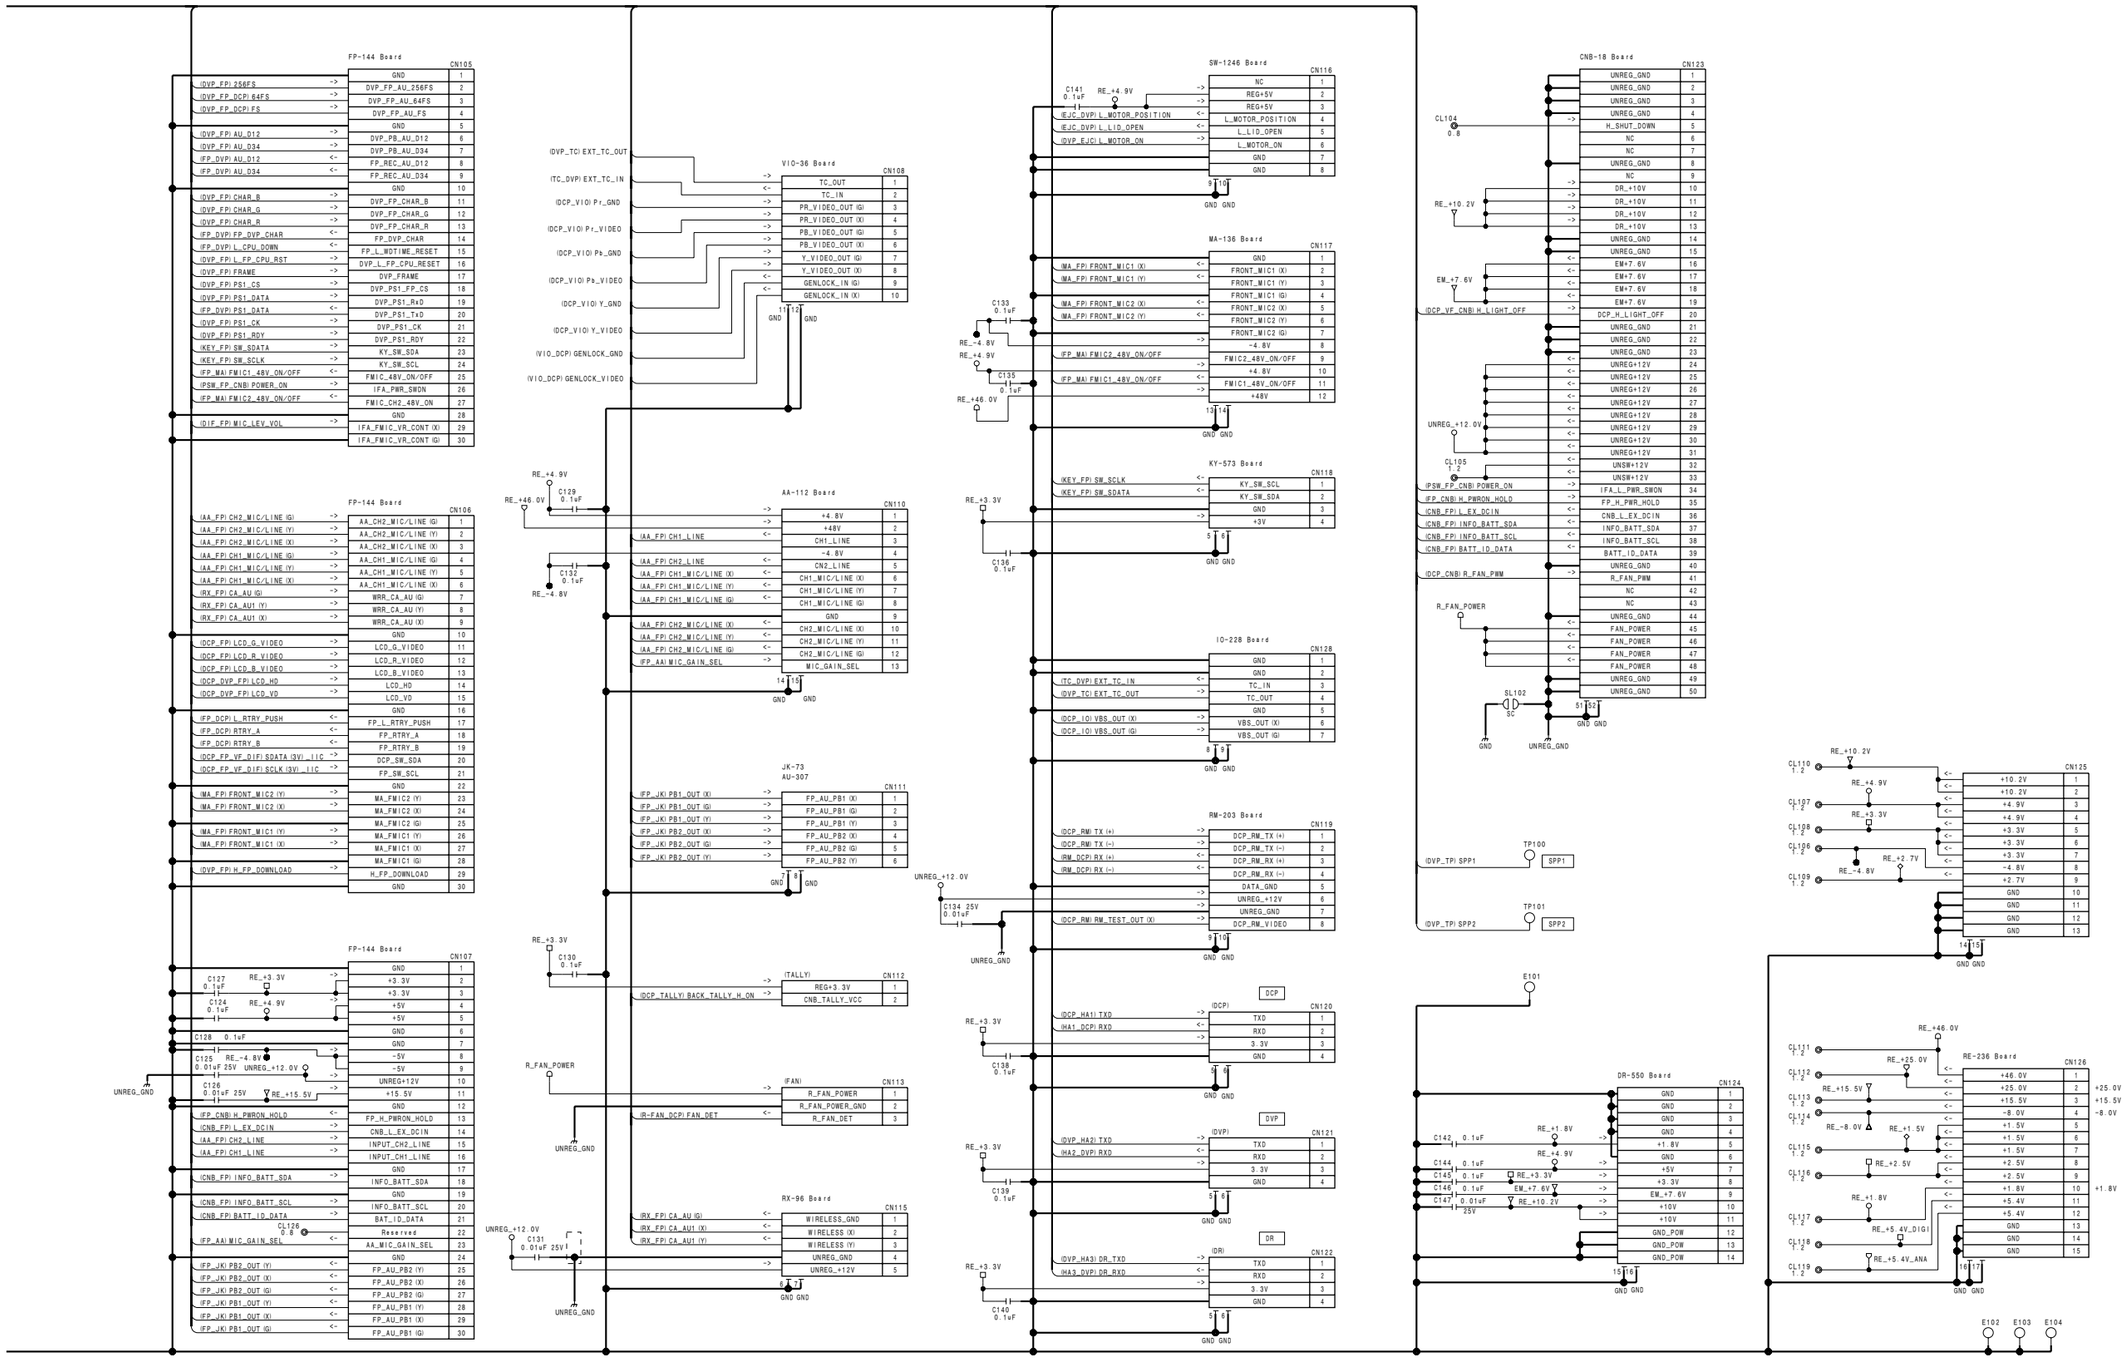

MB-1028
BOARD NO. 1-869-490-11, 12
PDW-F330K_MB-1028_120_1

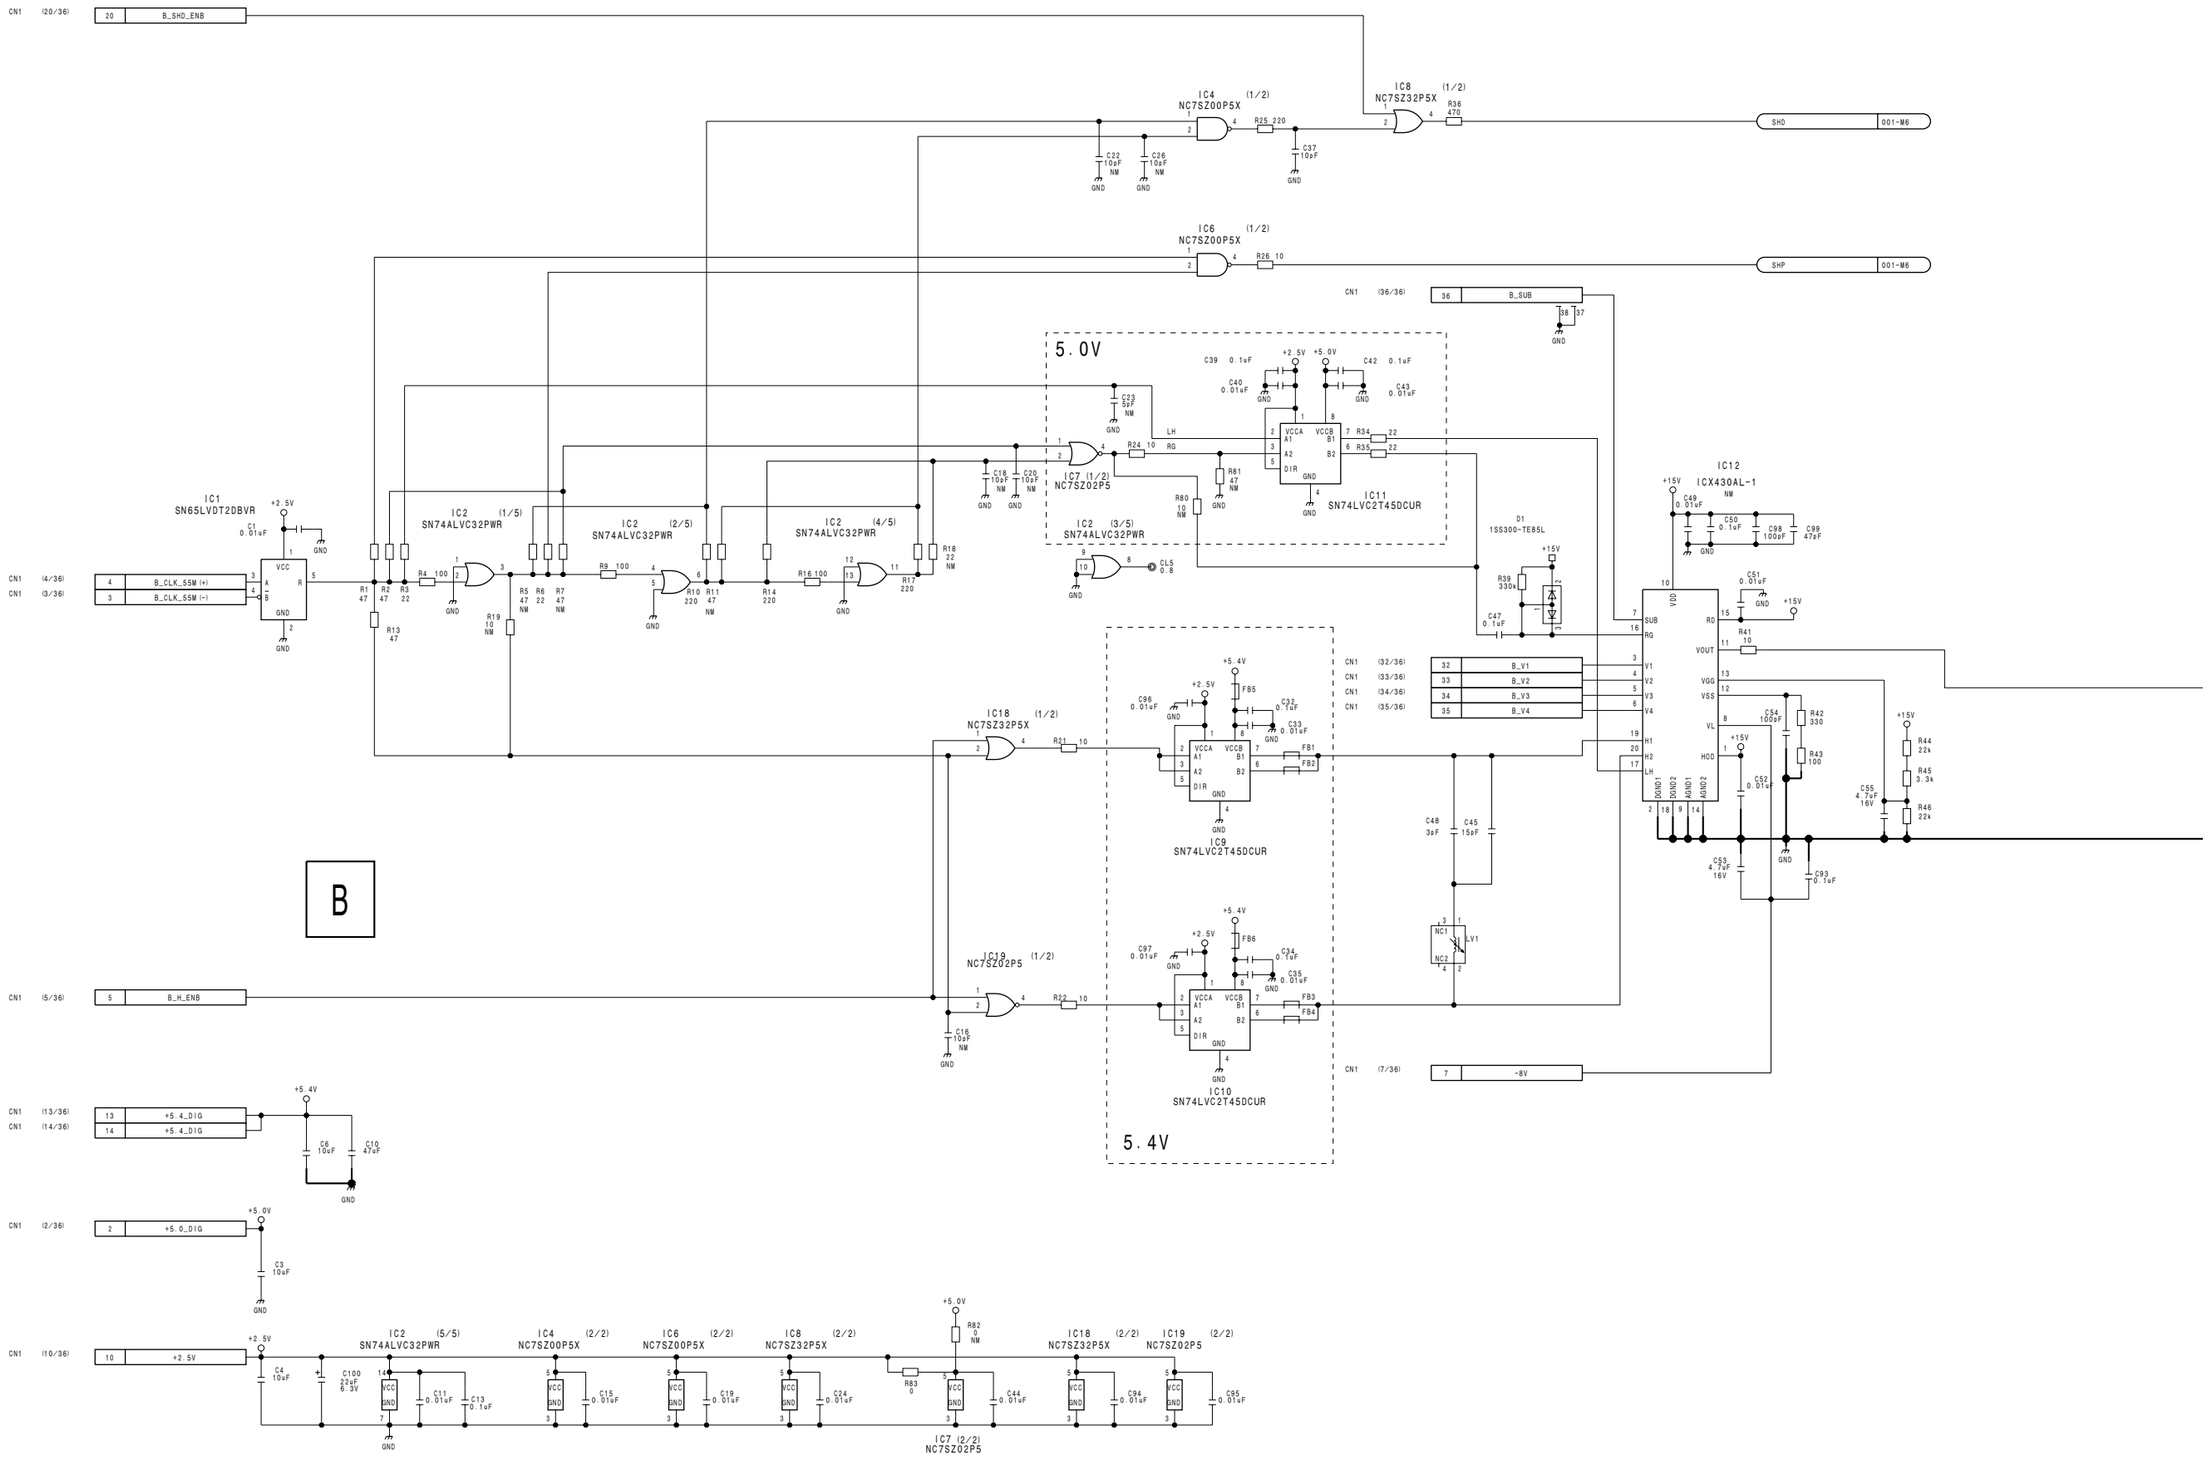
B_SHD_ENB
SHD
SHP
B_SUB
B_CLK_55M (+)
B_CLK_55M (-)
B_H_ENB
+5.4_DIG
+5.0_DIG
+2.5V
+8V
B_V1
B_V2
B_V3
B_V4
IC1 SN65LVDT2DBVR
IC2 SN74ALVC32PWR (1/5)
IC2 SN74ALVC32PWR (2/5)
IC2 SN74ALVC32PWR (3/5)
IC2 SN74ALVC32PWR (4/5)
IC2 SN74ALVC32PWR (5/5)
IC4 NC7SZ00P5X (1/2)
IC6 NC7SZ00P5X (1/2)
IC8 NC7SZ32P5X (1/2)
IC18 NC7SZ32P5X (1/2)
IC7 (1/2) NC7SZ02P5
IC19 NC7SZ02P5 (1/2)
IC7 (2/2) NC7SZ02P5
IC19 NC7SZ02P5 (2/2)
IC4 NC7SZ00P5X (2/2)
IC6 NC7SZ00P5X (2/2)
IC8 NC7SZ32P5X (2/2)
IC18 NC7SZ32P5X (2/2)
IC7 (3/3) SN74ALVC32PWR
IC9 SN74LVC2T45DCUR
IC10 SN74LVC2T45DCUR
IC11 SN74LVC2T45DCUR
IC12 ICX430AL-1
5.0V
5.4V
B

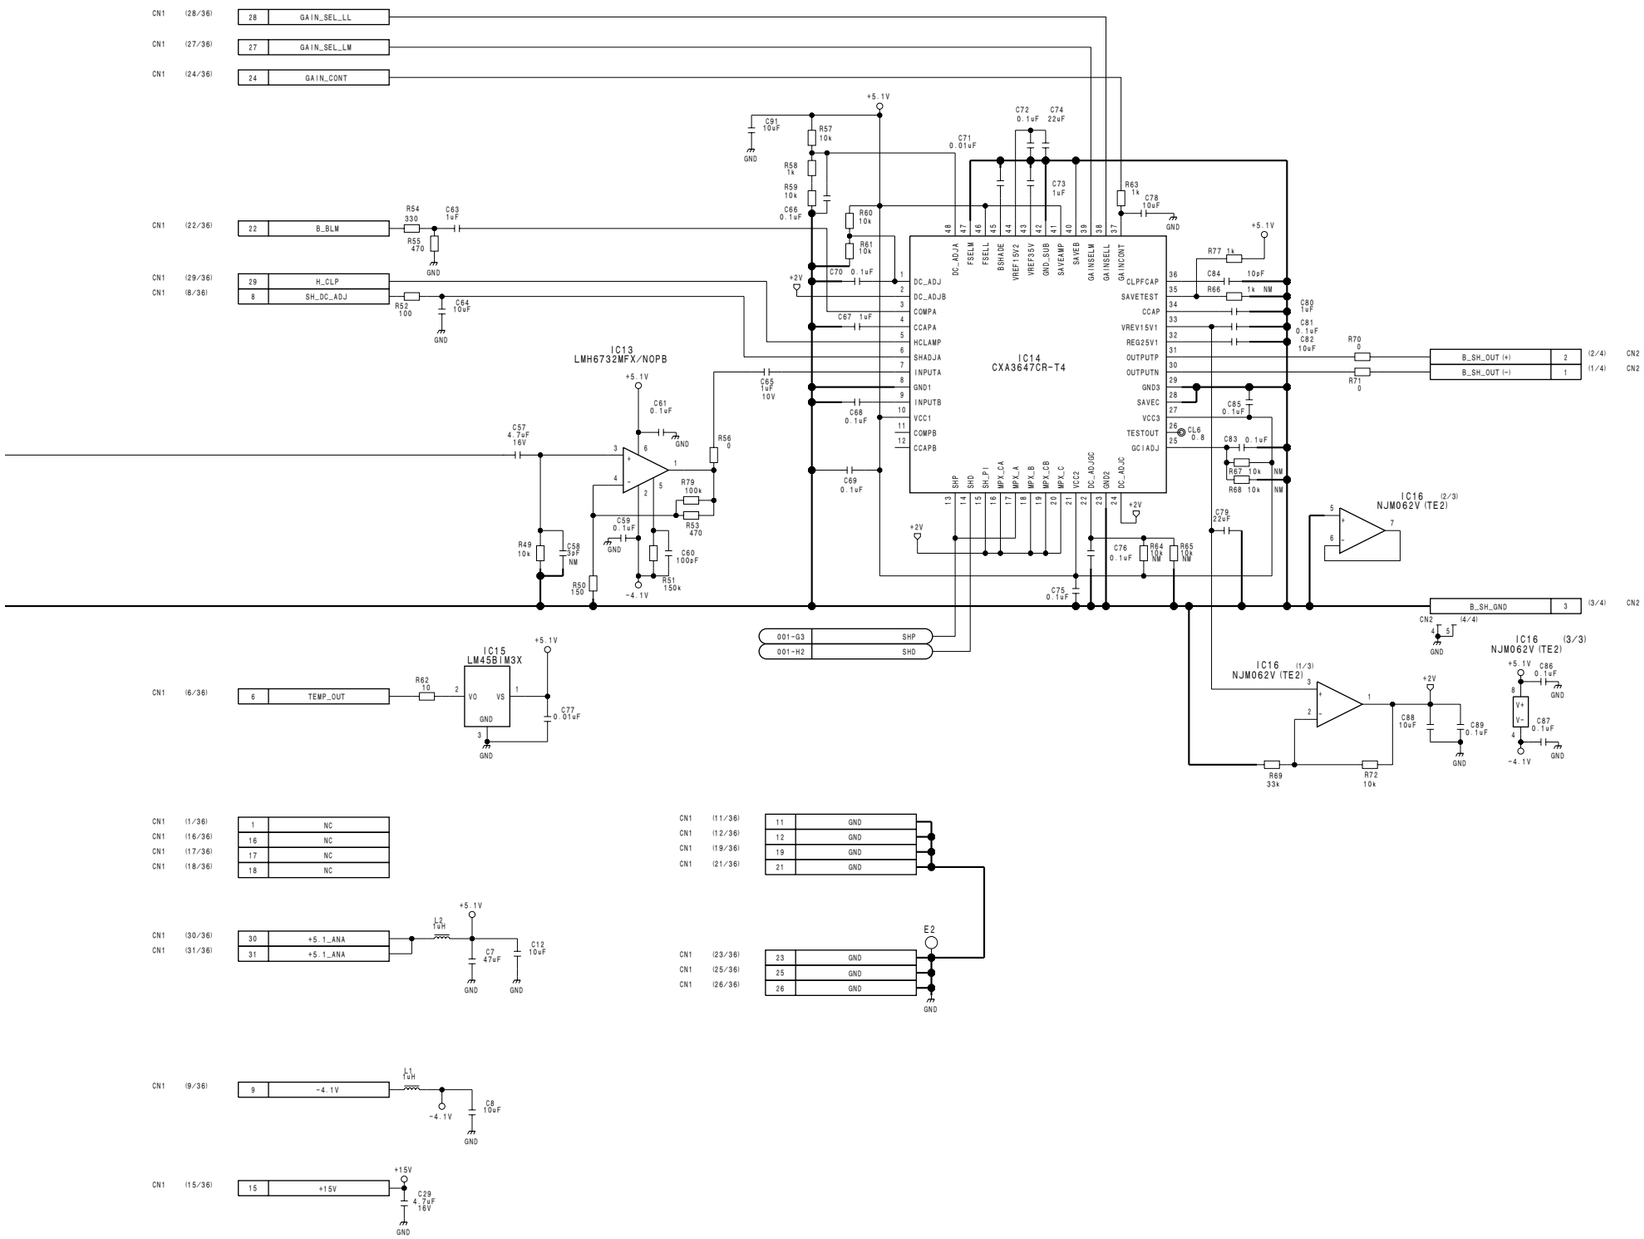

PA-328
BOARD NO. 1-869-514-11
PDW-F330K_PA-328_111_1

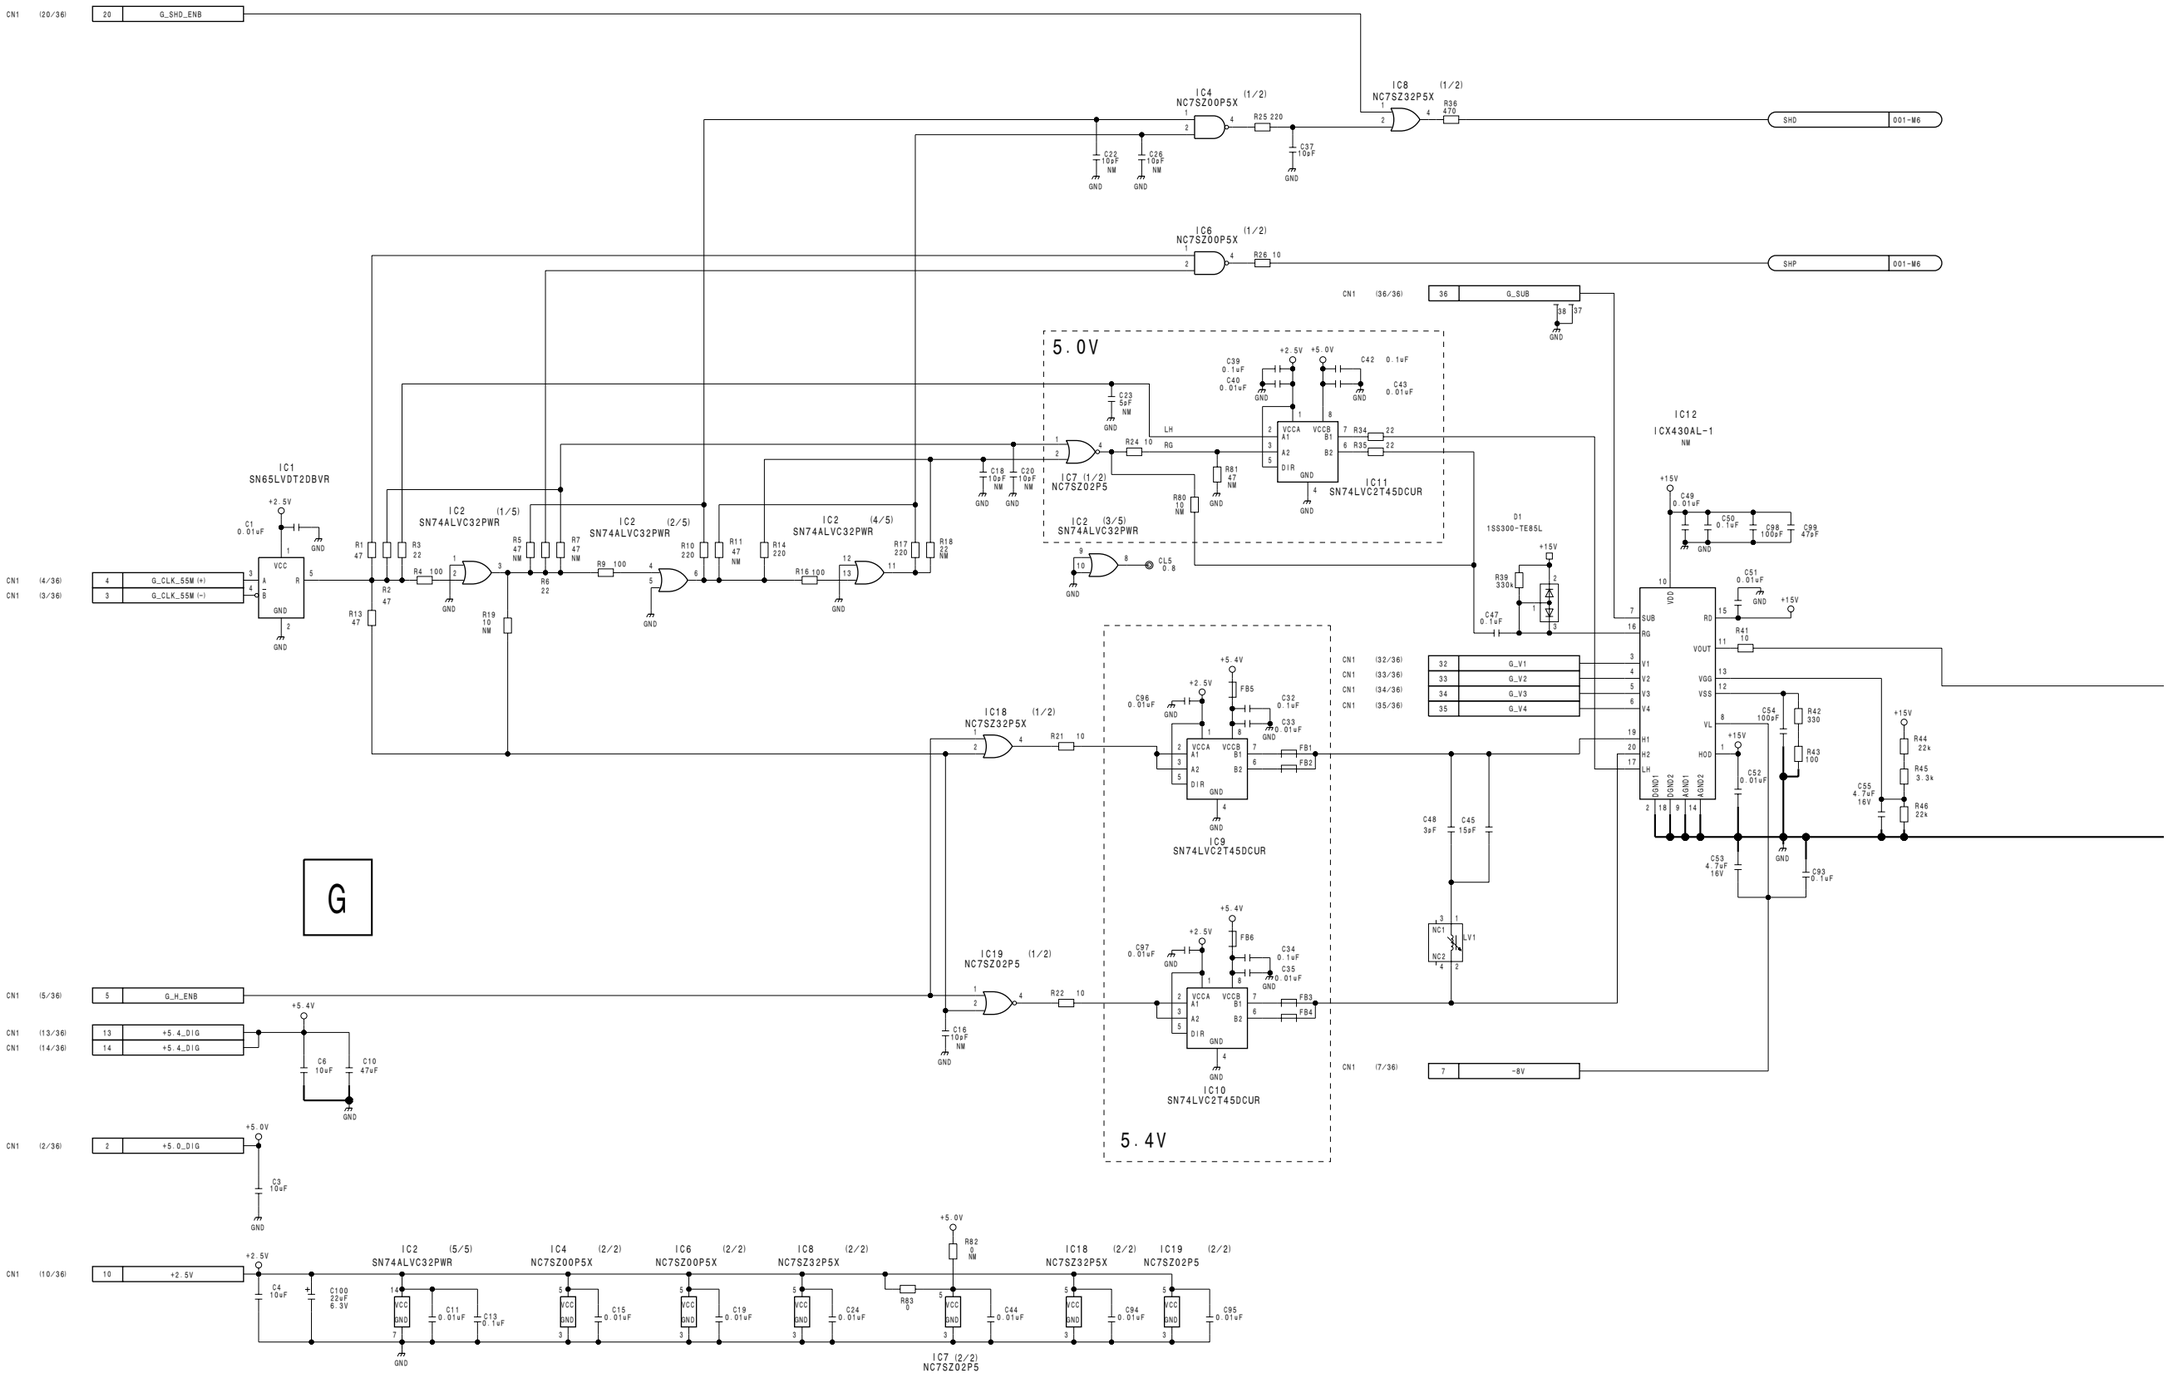
CN1 (20/36) 20 G_SHD_ENB
IC4 NC7SZ00P5X (1/2)
IC8 NC7SZ32P5X (1/2)
R36 470
SHD 001-M6
IC6 NC7SZ00P5X (1/2)
R26 10
SHP 001-M6
CN1 (36/36) 36 G_SUB
5.0V
IC1 SN65LVDT2DBVR
IC2 SN74ALVC32PWR (1/5)
IC2 SN74ALVC32PWR (2/5)
IC2 SN74ALVC32PWR (4/5)
IC2 SN74ALVC32PWR (3/5)
IC7 (1/2) NC7SZ02P5
IC11 SN74LVC2T45DCUR
IC12 ICX430AL-1 NM
D1 1SS300-TE85L
CN1 (4/36) 4 G_CLK_55M (+)
CN1 (3/36) 3 G_CLK_55M (-)
IC18 NC7SZ32P5X (1/2)
IC9 SN74LVC2T45DCUR
IC19 NC7SZ02P5 (1/2)
IC10 SN74LVC2T45DCUR
5.4V
CN1 (32/36) G_V1
CN1 (33/36) G_V2
CN1 (34/36) G_V3
CN1 (35/36) G_V4
CN1 (7/36) -8V
G
CN1 (5/36) 5 G_H_ENB
CN1 (13/36) 13 +5.4_DIG
CN1 (14/36) 14 +5.4_DIG
CN1 (2/36) 2 +5.0_DIG
CN1 (10/36) 10 +2.5V
IC2 (5/5) SN74ALVC32PWR
IC4 (2/2) NC7SZ00P5X
IC6 (2/2) NC7SZ00P5X
IC8 (2/2) NC7SZ32P5X
IC18 (2/2) NC7SZ32P5X
IC19 (2/2) NC7SZ02P5
IC7 (2/2) NC7SZ02P5

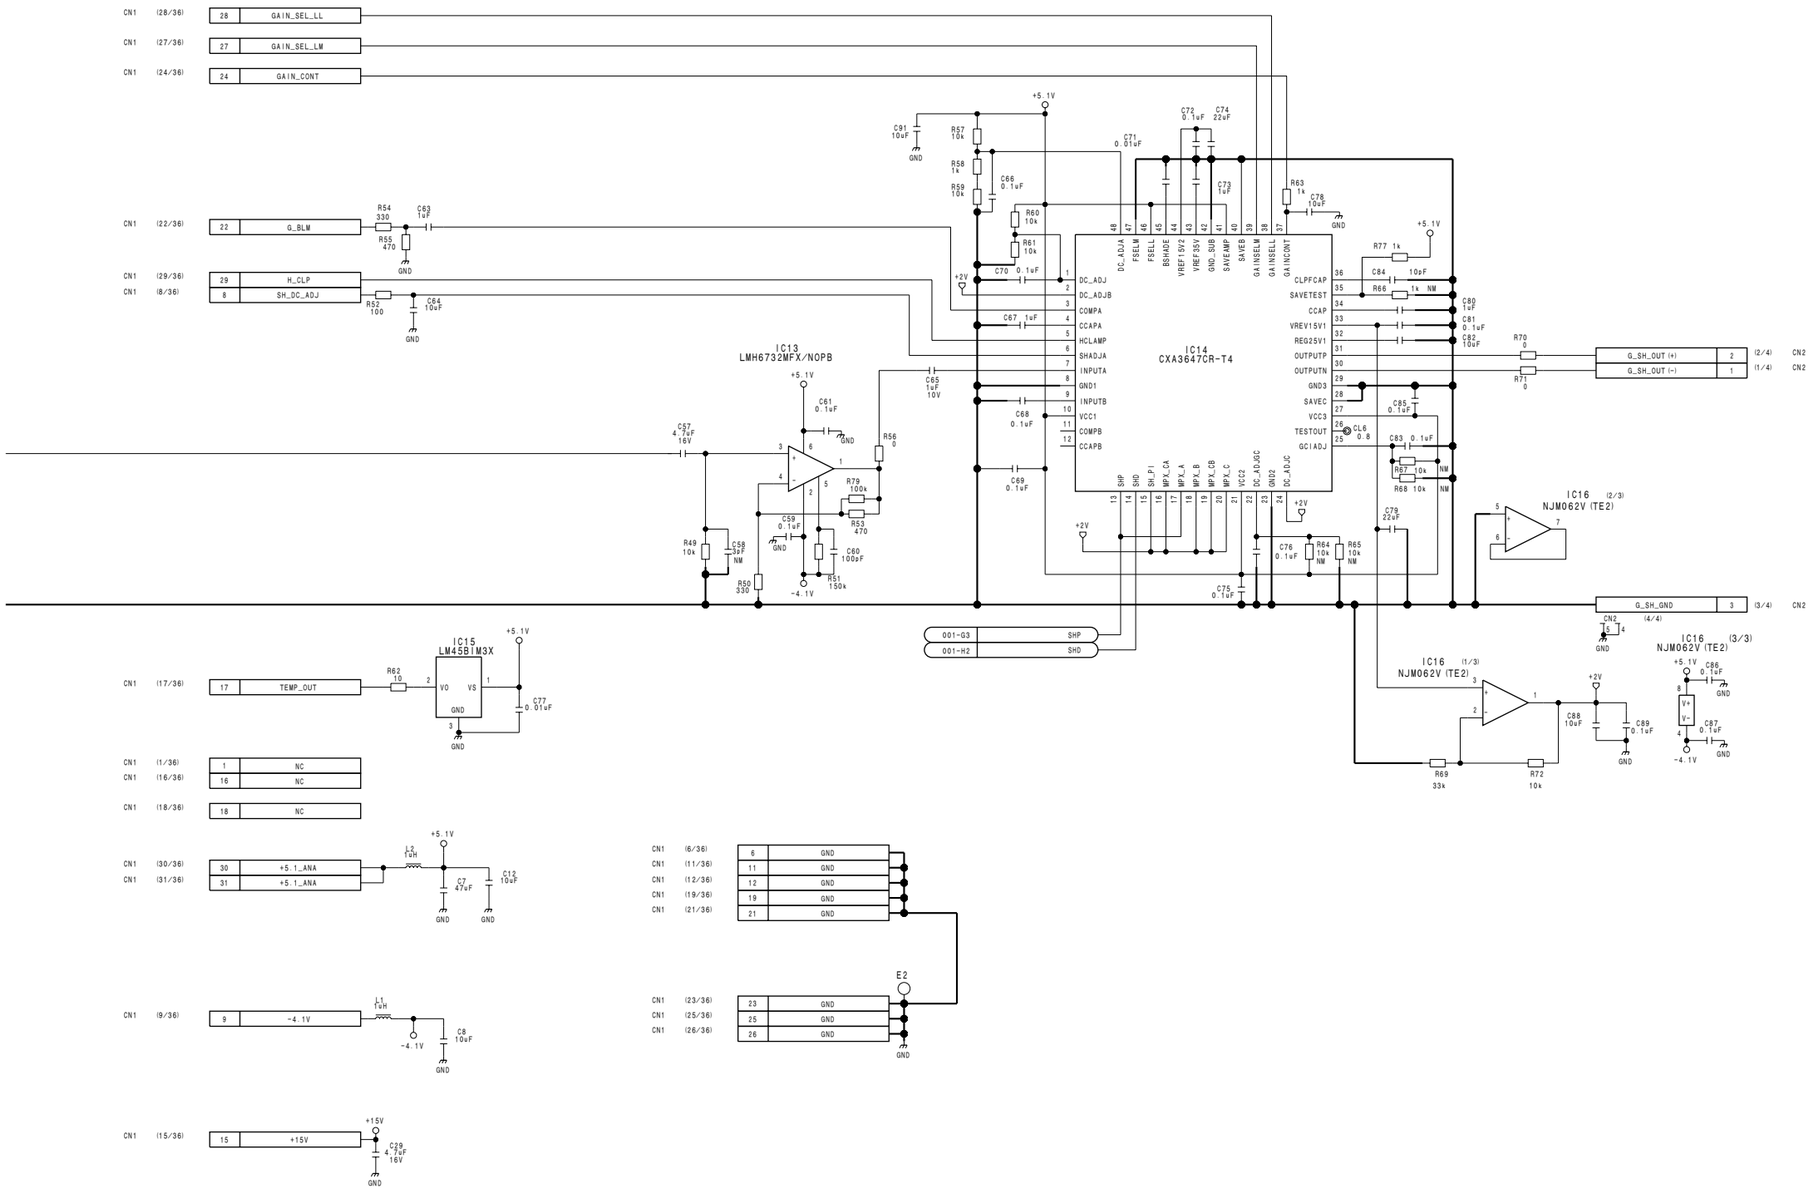

PA-329
BOARD NO. 1-869-515-11
PDW-F330K_PA-329_111_1

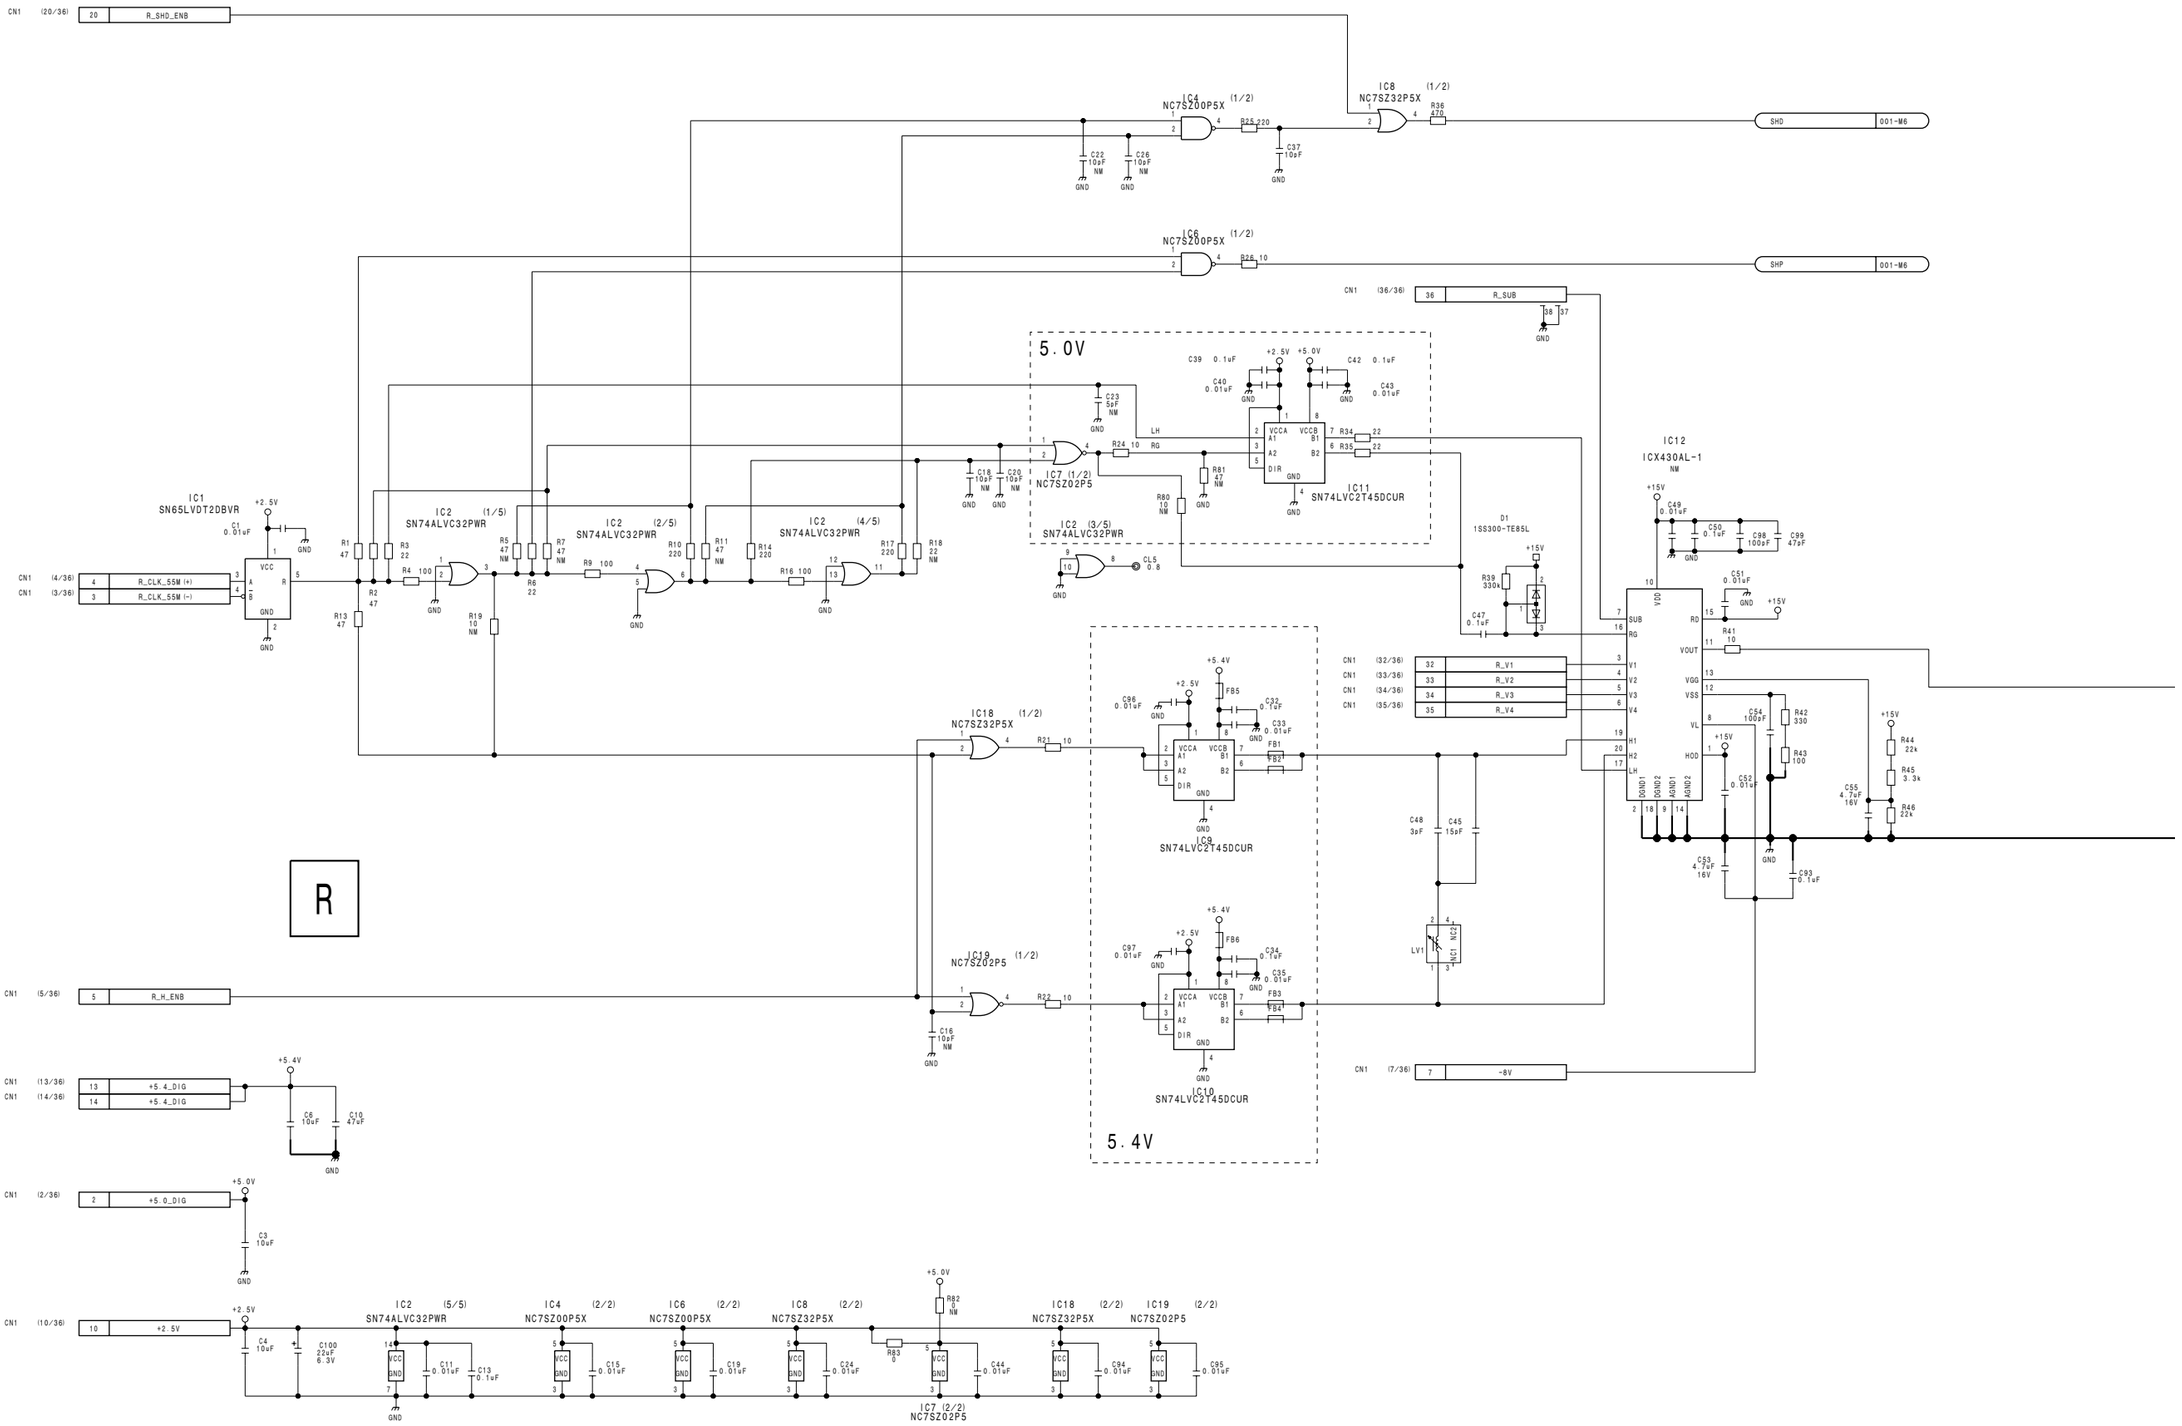
R
5.0V
5.4V
IC1 SN65LVDT2DBVR
IC2 SN74ALVC32PWR
IC4 NC7SZ00P5X
IC6 NC7SZ00P5X
IC7 NC7SZ02P5
IC8 NC7SZ32P5X
IC9 SN74LVC2T45DCUR
IC10 SN74LVC2T45DCUR
IC11 SN74LVC2T45DCUR
IC12 ICX430AL-1
IC18 NC7SZ32P5X
IC19 NC7SZ02P5
R_CLK_55M (+)
R_CLK_55M (-)
R_SHD_ENB
R_SUB
R_H_ENB
R_V1
R_V2
R_V3
R_V4
SHD
SHP
+2.5V
+5.0V
+5.4V
+15V
-8V
LH
RG

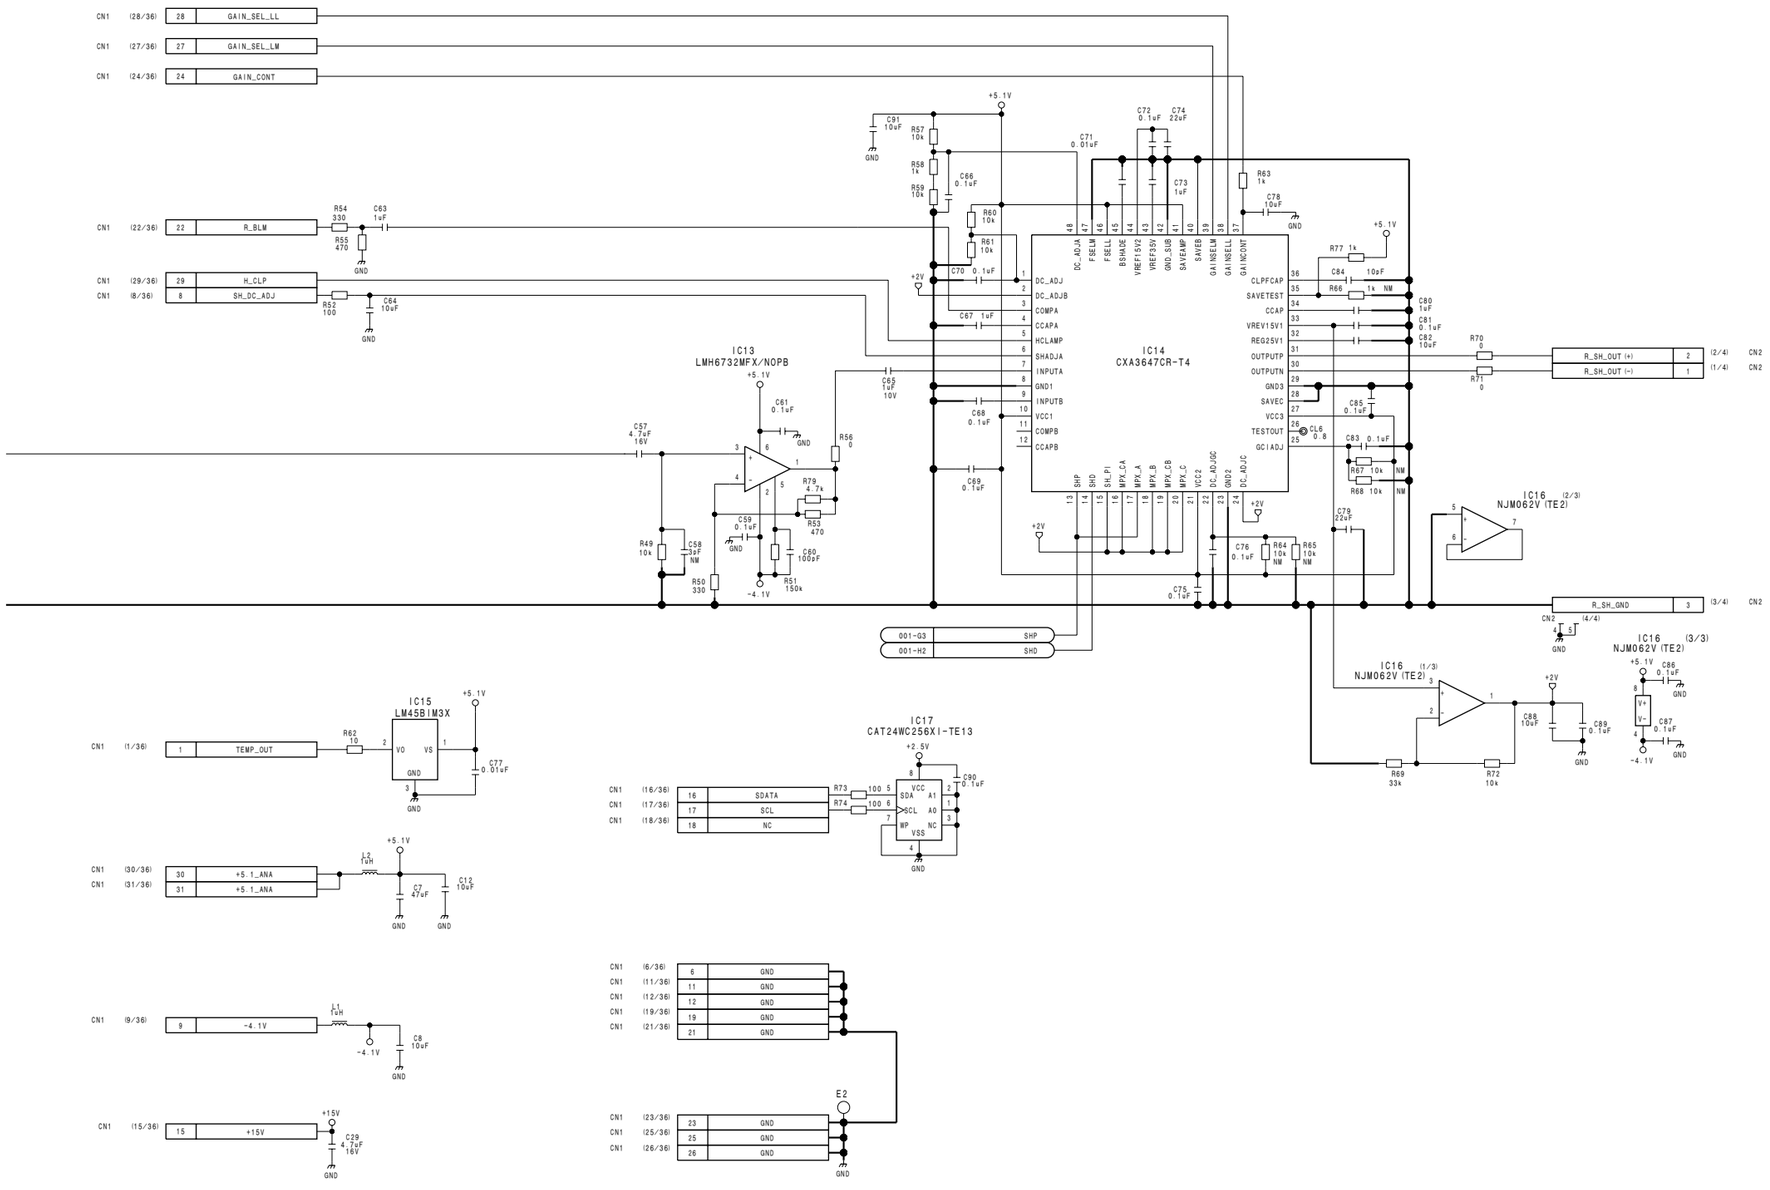

PA-330
BOARD NO. 1-869-516-11
PDW-F330K_PA-330_111_1

MS-71, PS-708, PSW-85
SUFFIX: -11 SUFFIX: -11 SUFFIX: -11

DCP

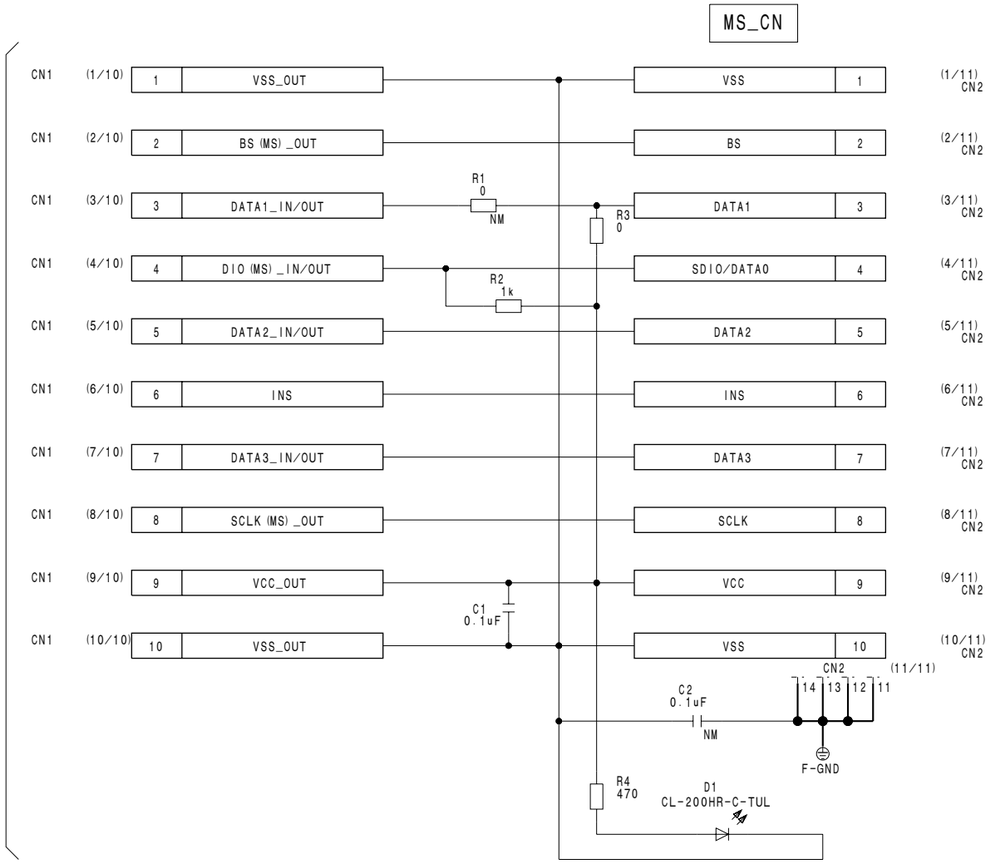

MS-71

BOARD NO. 1-869-484-11
PDW-F330K_MS-71_111_1

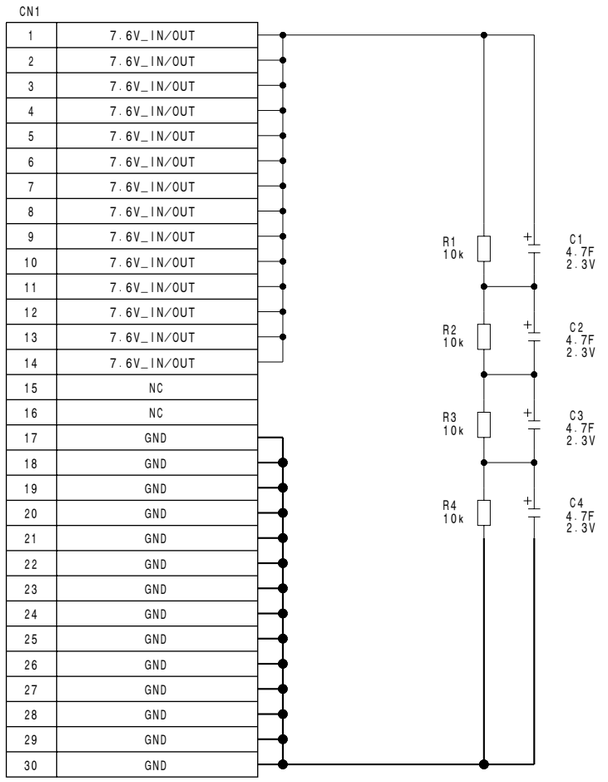

PS-708

BOARD NO. 1-869-492-11
PDW-F330K_PS-708_110_1



PSW-85

BOARD NO. 1-869-511-11
PDW-F330K_PSW-85_110_1

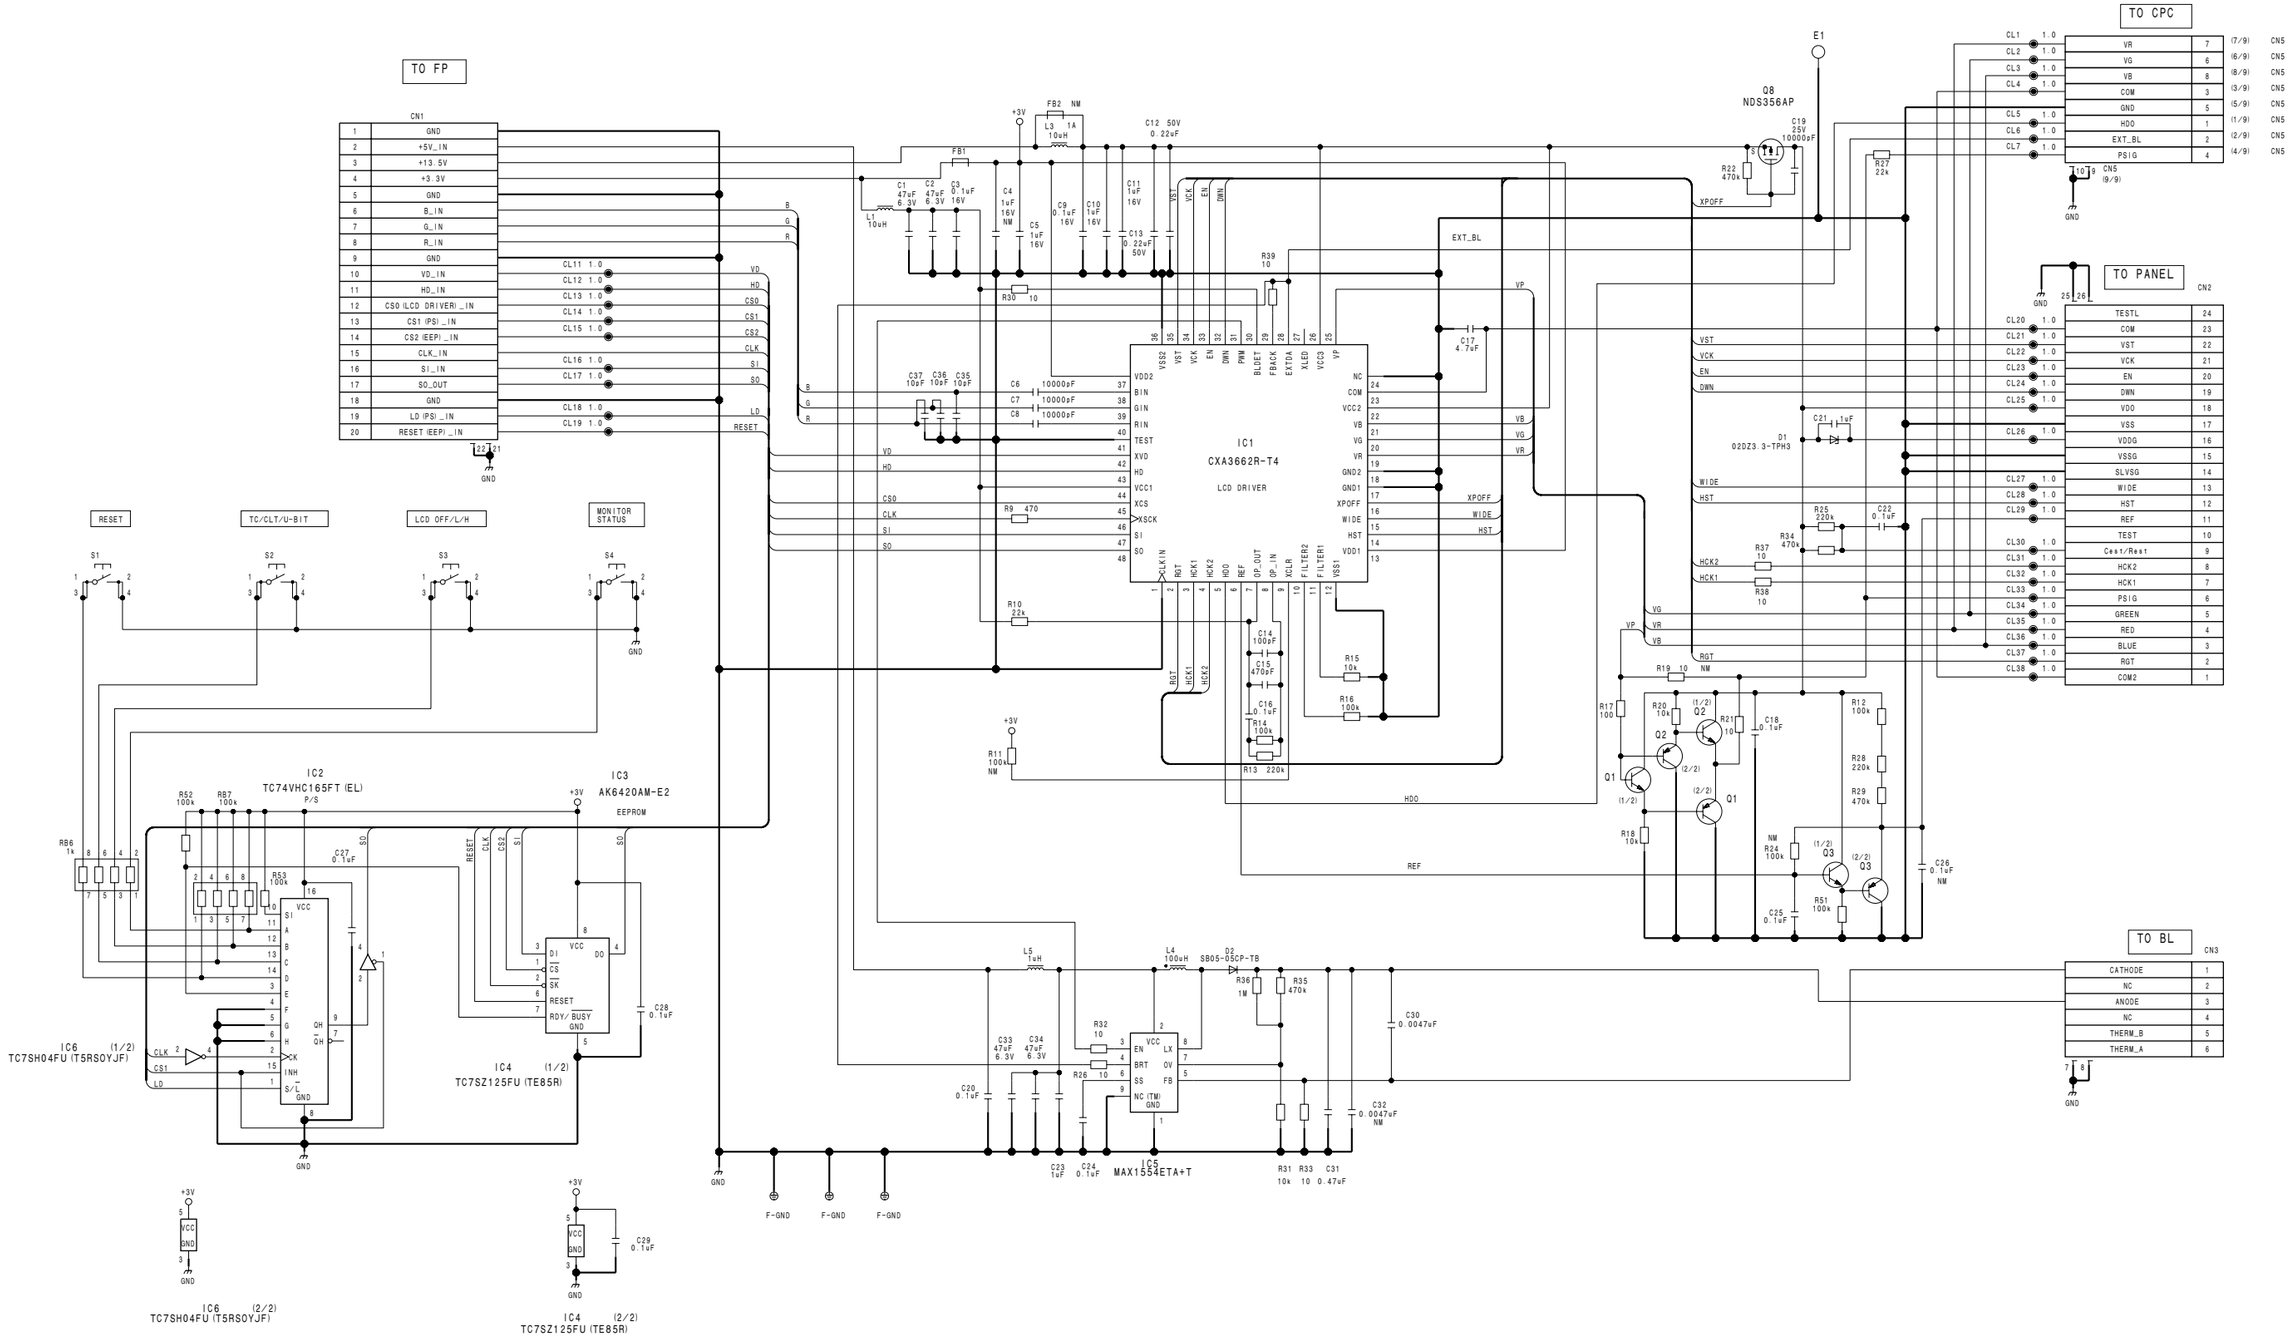

PD-115
BOARD NO. 1-869-493-11
PDW-F330K_PD-115_110_1

RE-236 (1/3) **SUFFIX: -11**

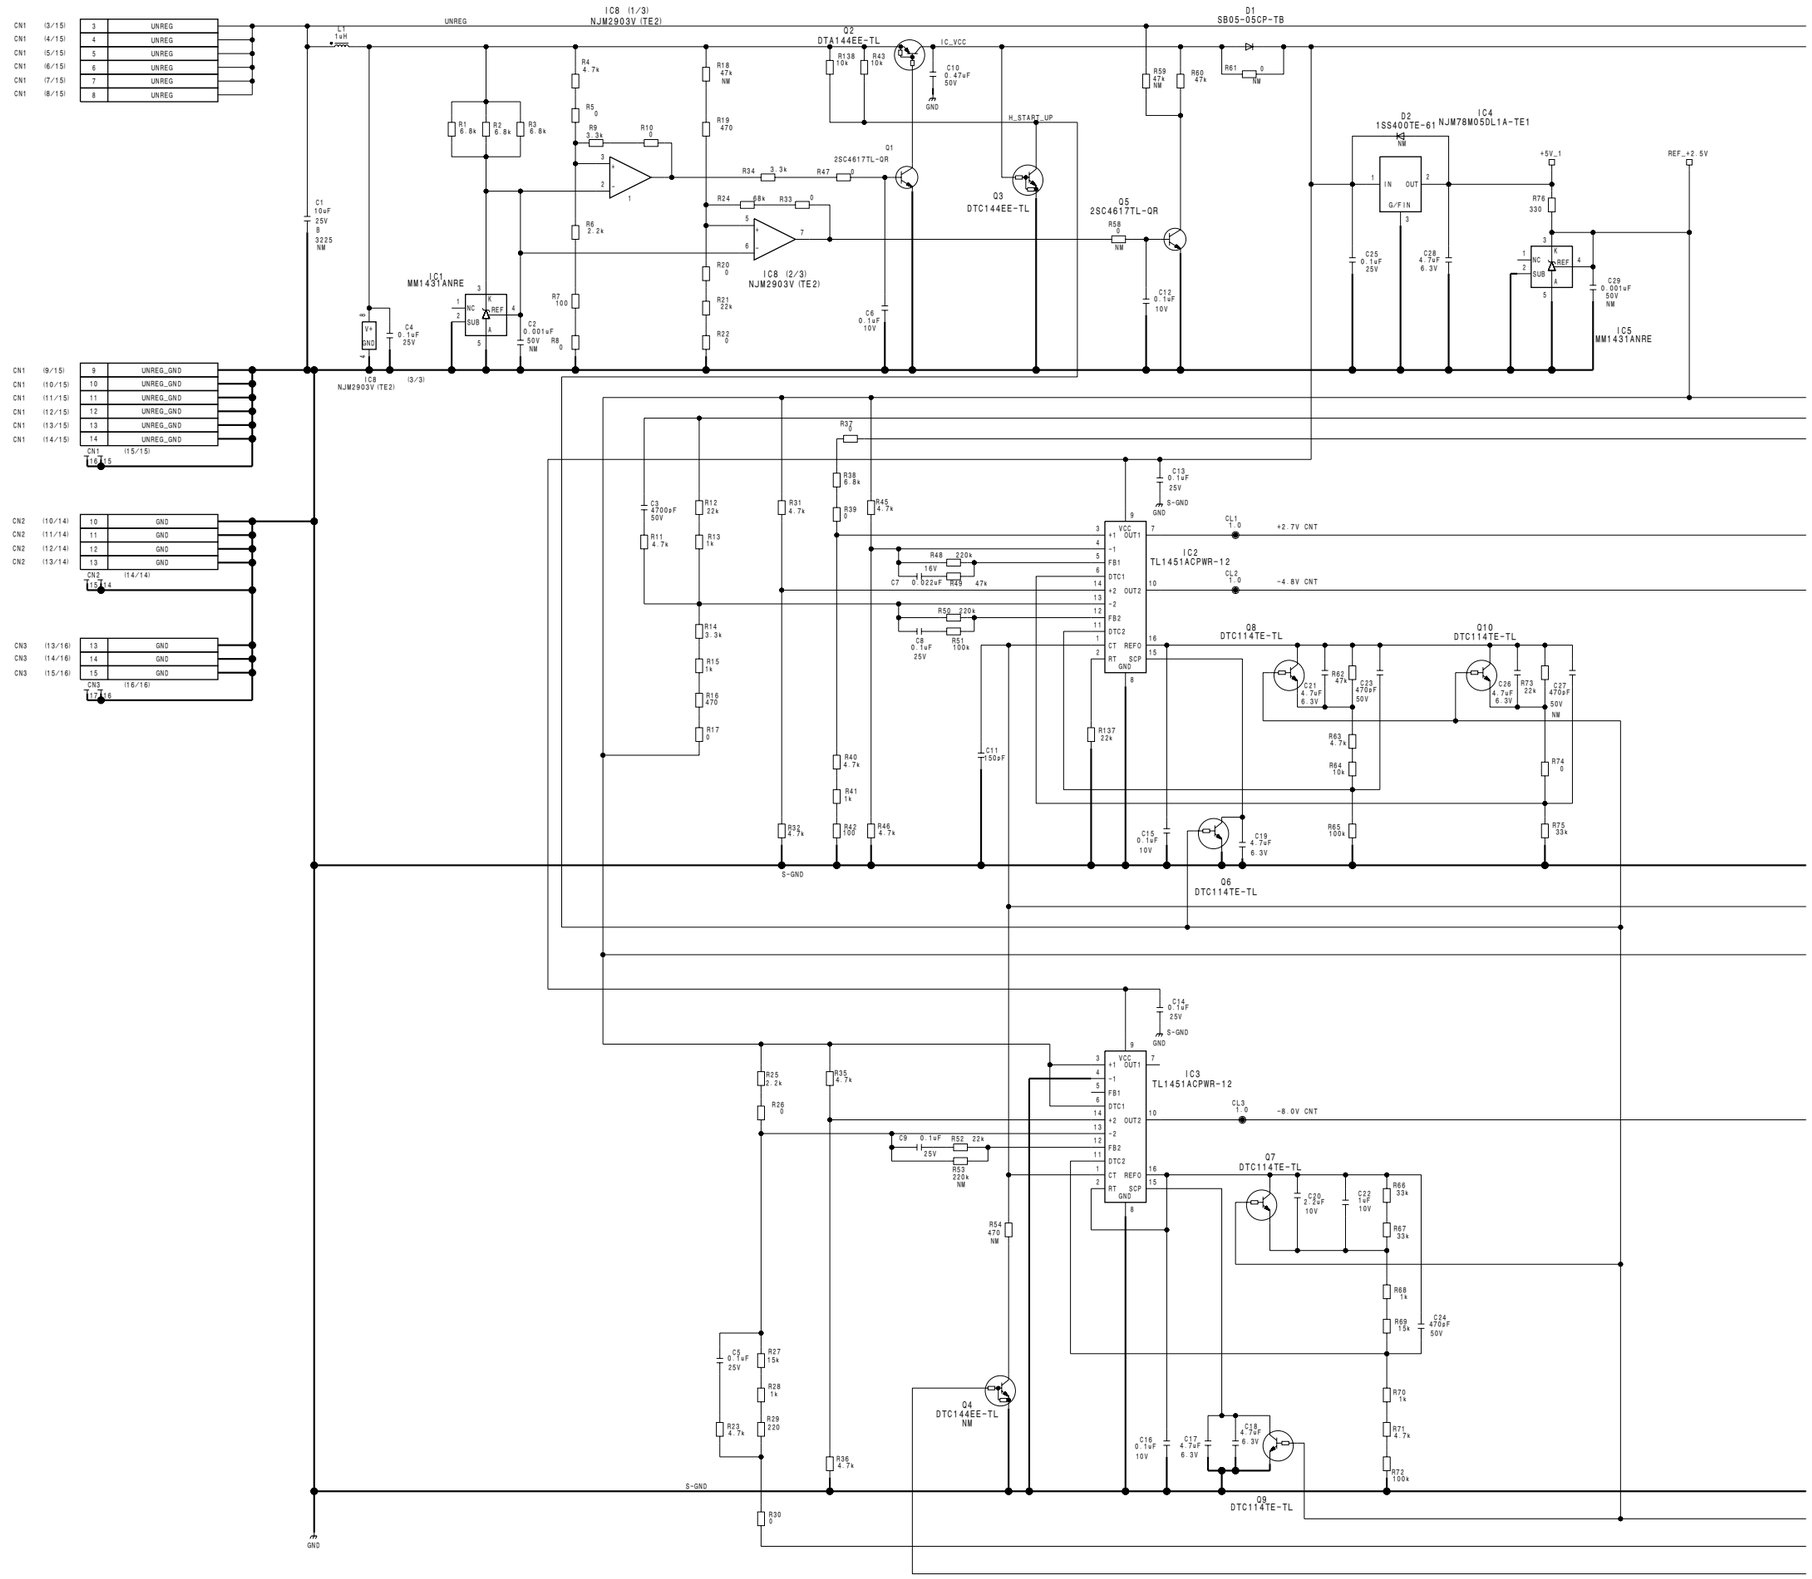

4-127

RE-236 (1/3)
SUFFIX: -11

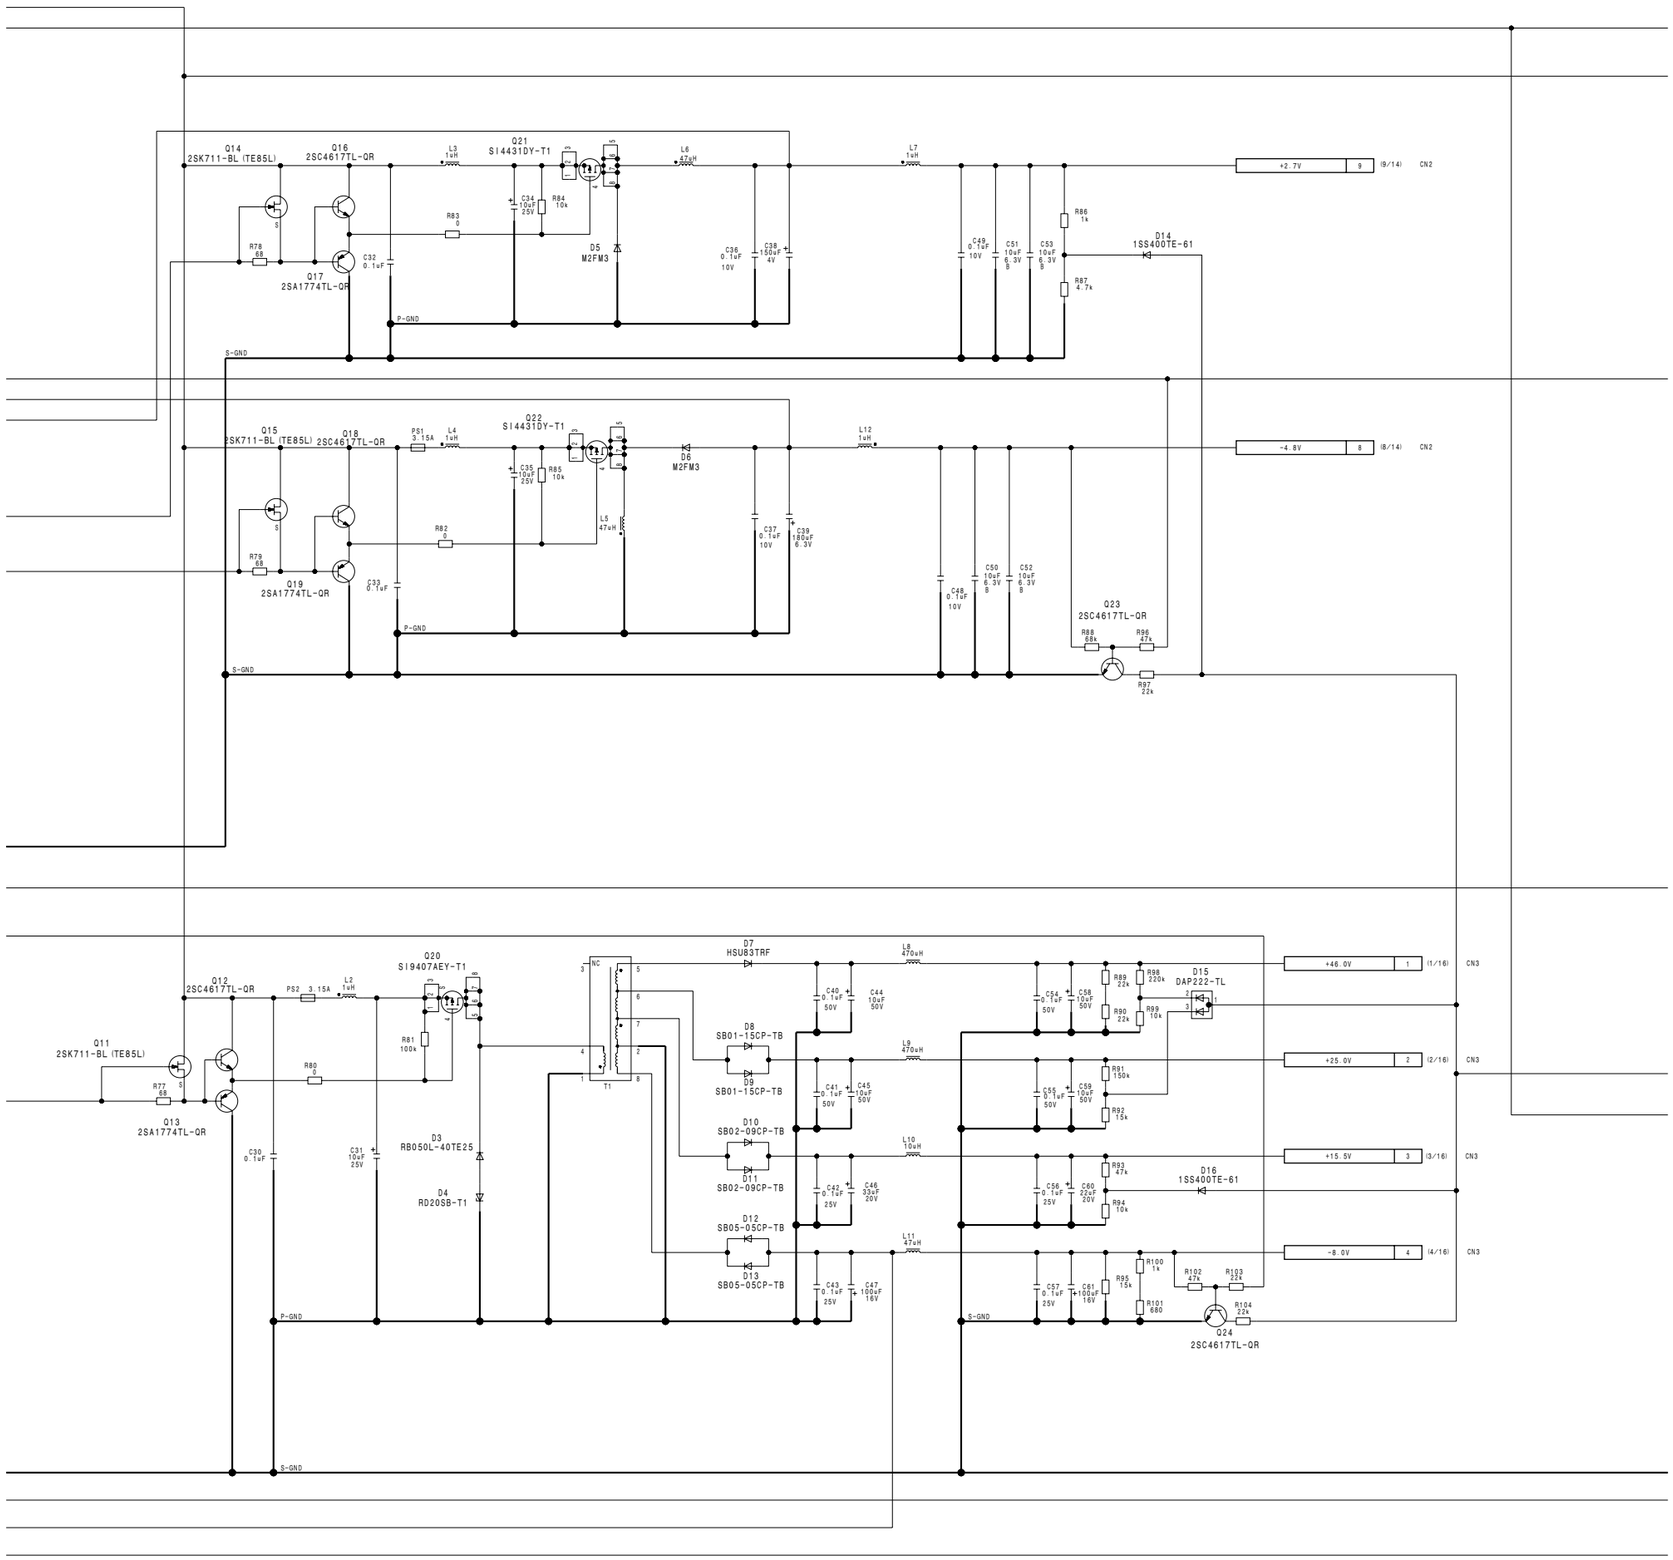

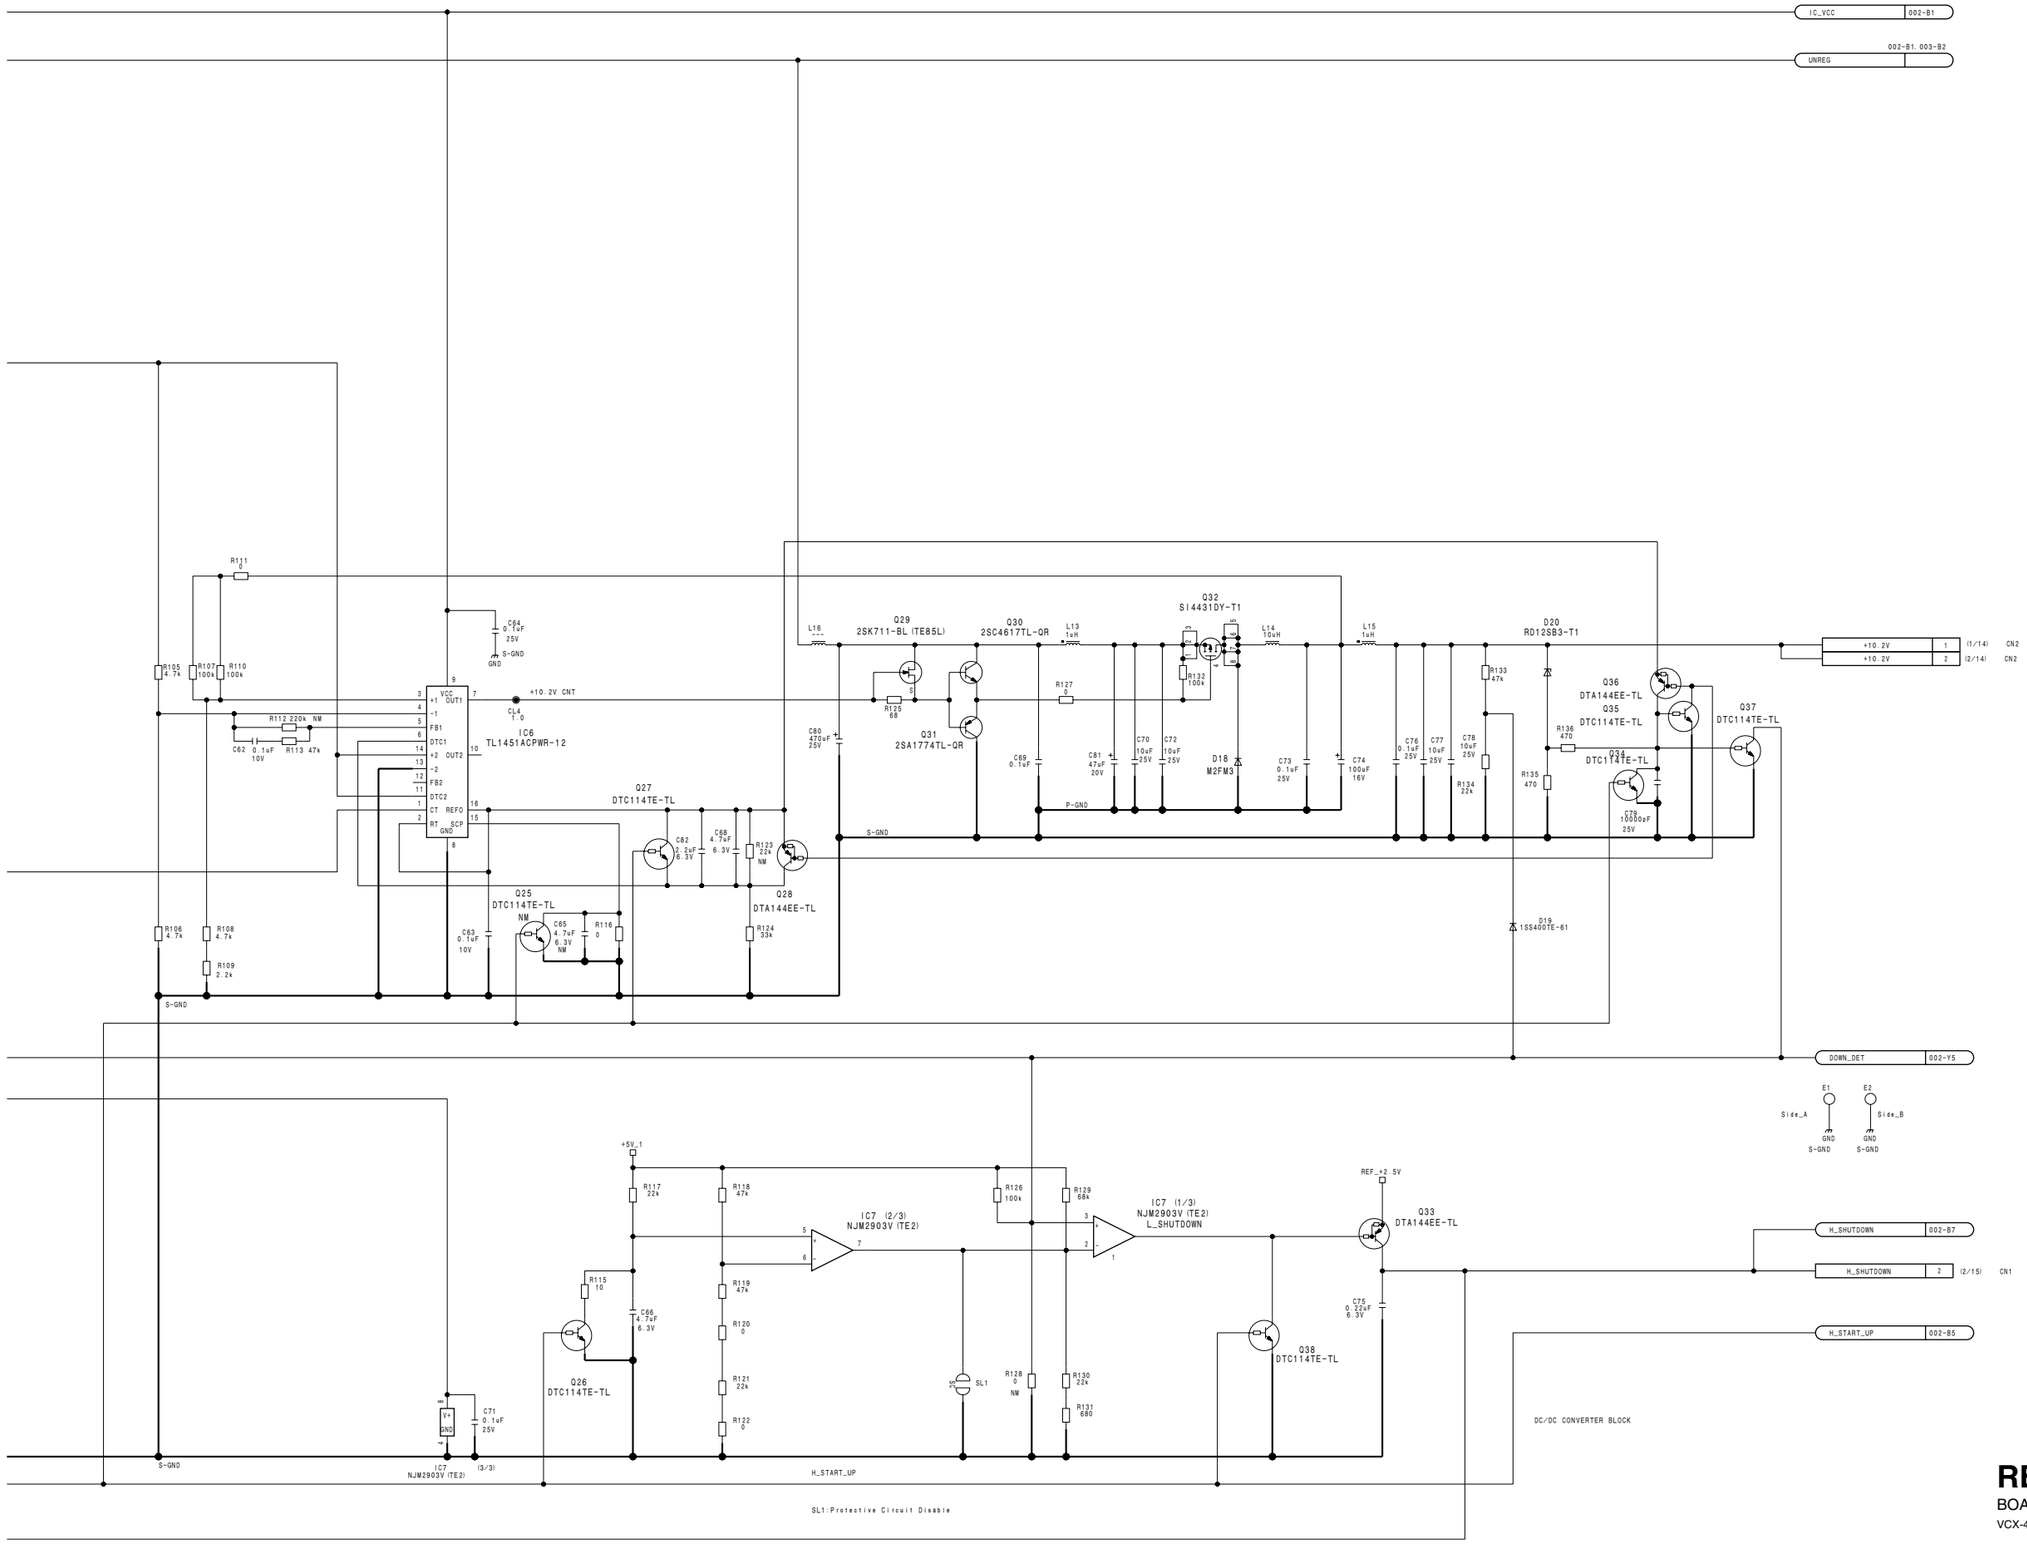

RE-236 (1/3)
BOARD NO. 1-869-663-11
VCX-415_RE-236_004_1

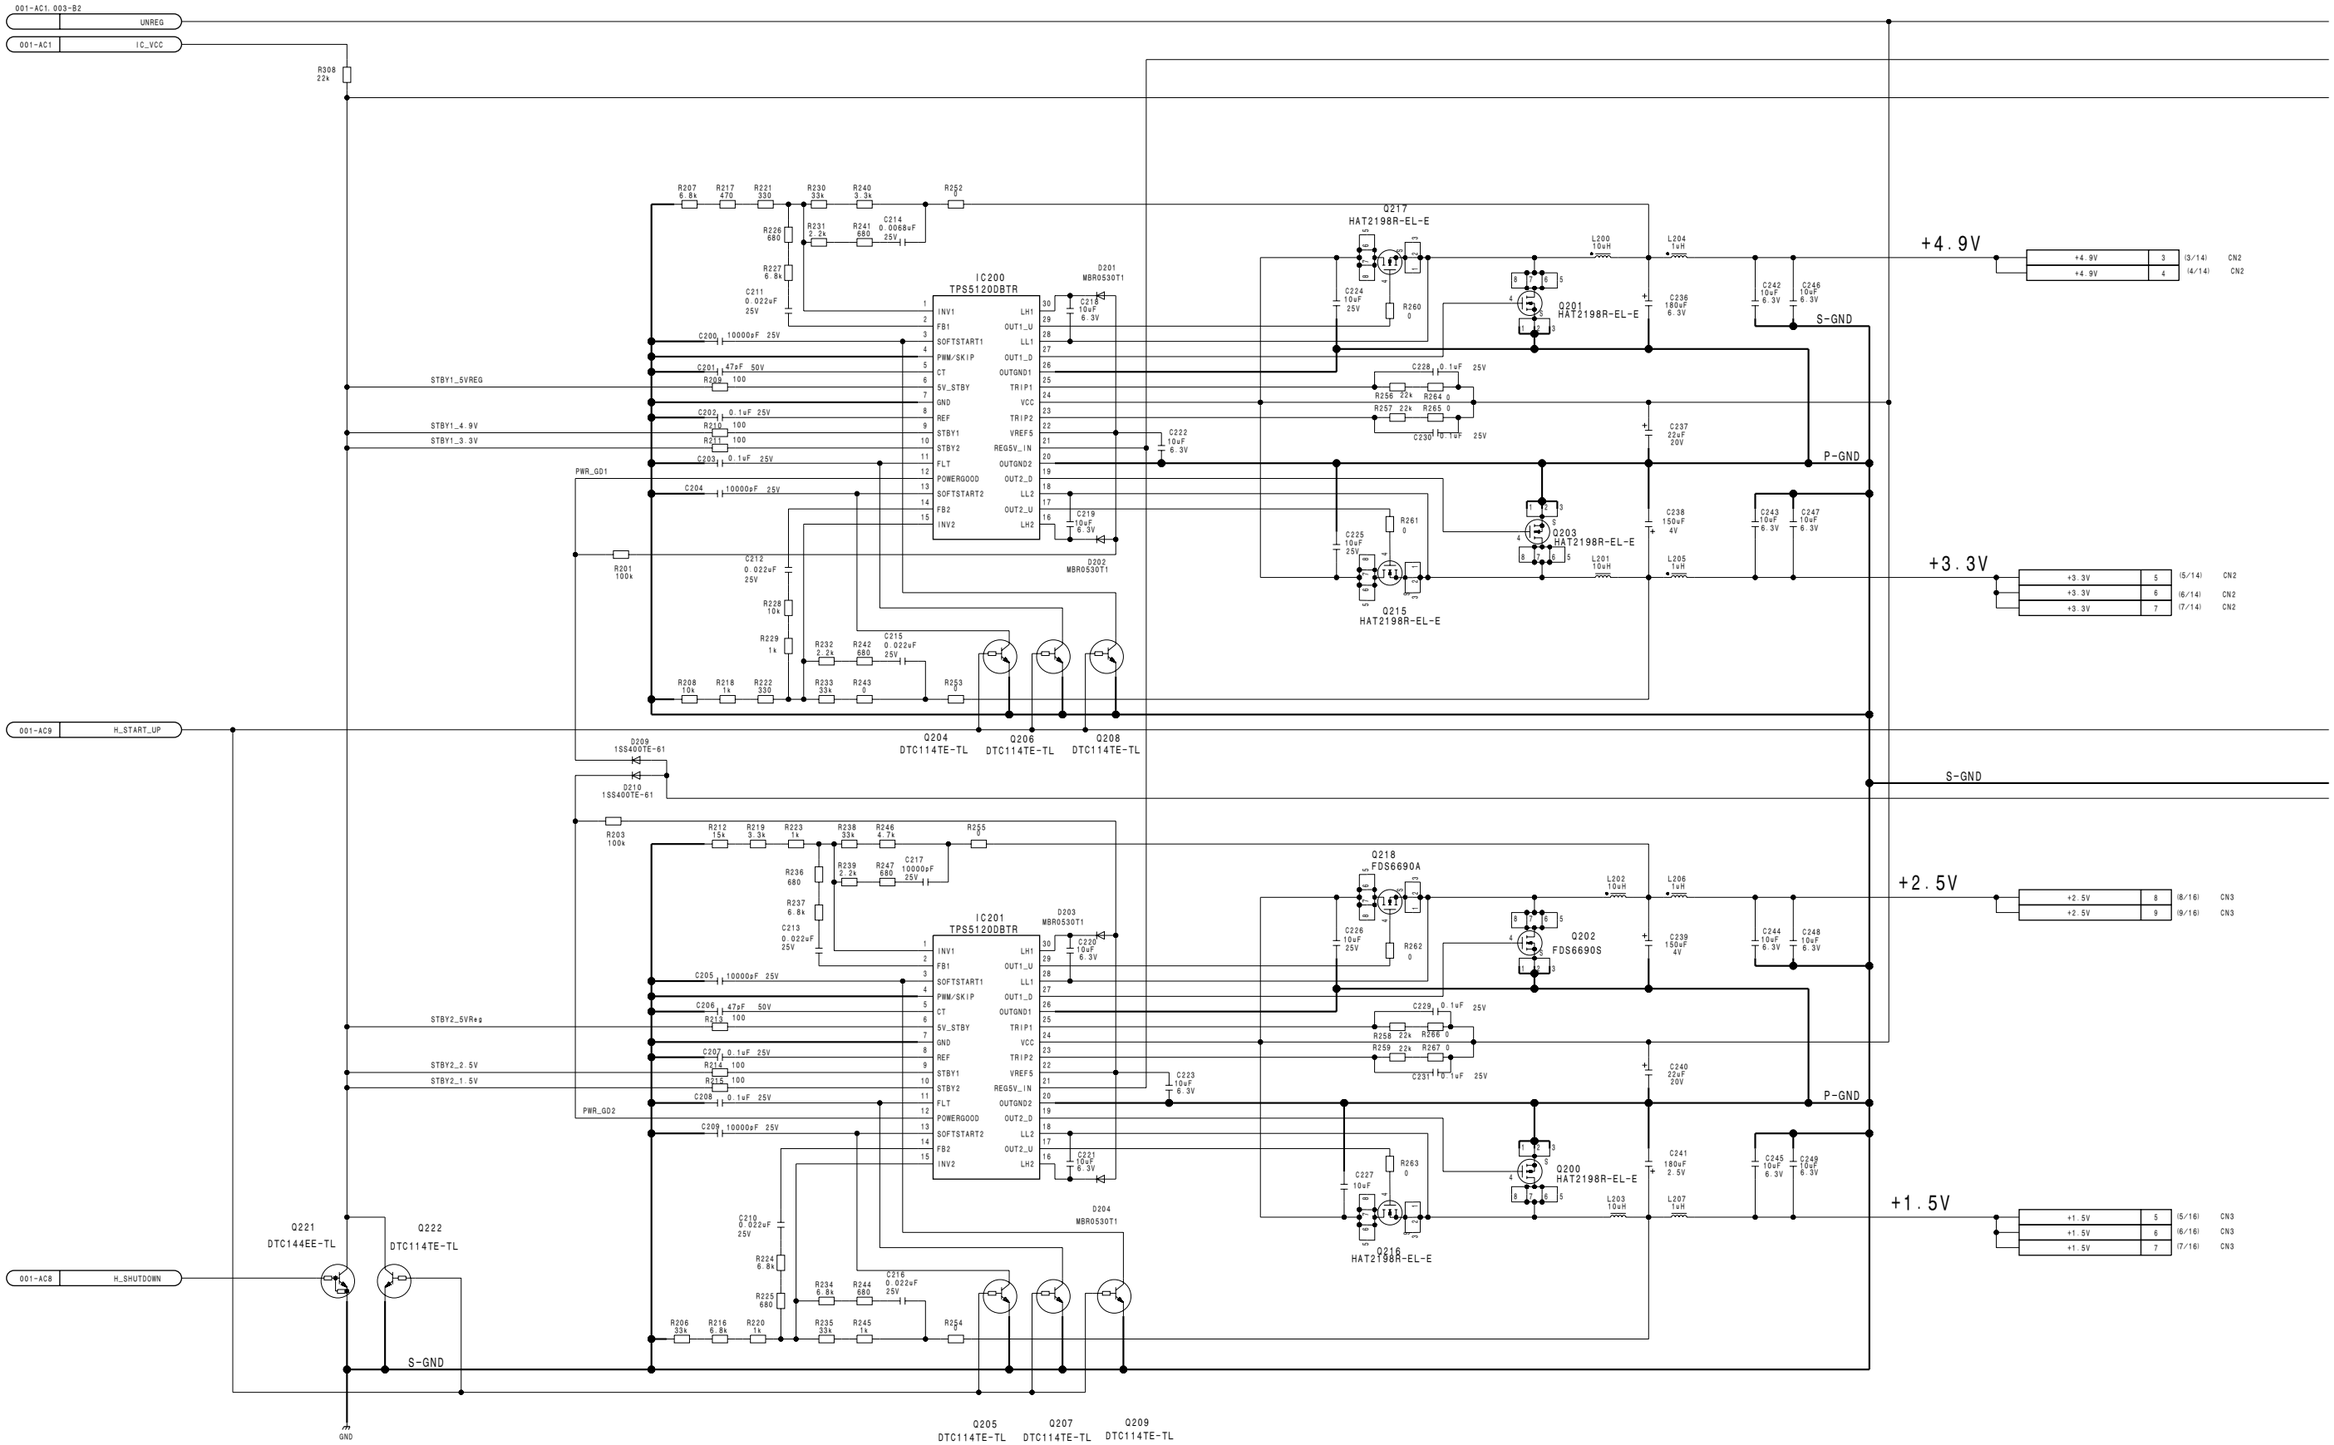
001-AC1.003-B2
UNREG
001-AC1
IC_VCC
R308 22k
IC200 TPS5120DBTR
INV1 FB1 SOFTSTART1 PWM/SKIP CT 5V_STBY GND REF STBY1 STBY2 FLT POWERGOOD SOFTSTART2 FB2 INV2
LH1 OUT1_U LL1 OUT1_D OUTGND1 TRIP1 VCC TRIP2 VREF5 REG5V_IN OUTGND2 OUT2_D LL2 OUT2_U LH2
D201 MBR0530T1
D202 MBR0530T1
C200 10000pF 25V
C201 47pF 50V
C202 0.1uF 25V
C203 0.1uF 25V
C204 10000pF 25V
C211 0.022uF 25V
C212 0.022uF 25V
C214 0.0068uF 25V
C215 0.022uF 25V
C216 0.022uF 25V
C217 10000pF 25V
C218 10uF 6.3V
C219 10uF 6.3V
C220 10uF 6.3V
C221 10uF 6.3V
C222 10uF 6.3V
C223 10uF 6.3V
R207 6.8k
R217 470
R221 330
R230 33k
R240 3.3k
R252 0
R226 680
R231 2.2k
R241 680
R227 6.8k
R209 100
R210 100
R211 100
R228 10k
R229 1k
R232 2.2k
R242 680
R233 33k
R243 0
R253 0
R208 10k
R218 1k
R222 330
R201 100k
STBY1_5VREG
STBY1_4.9V
STBY1_3.3V
PWR_GD1
Q204 DTC114TE-TL
Q206 DTC114TE-TL
Q208 DTC114TE-TL
Q217 HAT2198R-EL-E
Q215 HAT2198R-EL-E
Q201 HAT2198R-EL-E
Q203 HAT2198R-EL-E
L200 10uH
L201 10uH
L204 1uH
L205 1uH
C224 10uF 25V
C225 10uF 25V
C226 10uF 25V
C227 10uF
R260 0
R261 0
R262 0
R263 0
C228 0.1uF 25V
C230 0.1uF 25V
R256 22k
R257 22k
R264 0
R265 0
C236 180uF 6.3V
C237 22uF 20V
C238 150uF 4V
C242 10uF 6.3V
C243 10uF 6.3V
C246 10uF 6.3V
C247 10uF 6.3V
+4.9V
+3.3V
S-GND
P-GND
001-AC9
H_START_UP
D209 1SS400TE-61
D210 1SS400TE-61
R203 100k
IC201 TPS5120DBTR
D203 MBR0530T1
D204 MBR0530T1
C205 10000pF 25V
C206 47pF 50V
C207 0.1uF 25V
C208 0.1uF 25V
C209 10000pF 25V
C210 0.022uF 25V
C213 0.022uF 25V
C217 10000pF 25V
C220 10uF 6.3V
C221 10uF 6.3V
C223 10uF 6.3V
R212 15k
R219 3.3k
R223 1k
R238 33k
R246 4.7k
R255 0
R236 680
R239 2.2k
R247 680
R237 6.8k
R213 100
R214 100
R215 100
R224 6.8k
R225 680
R234 6.8k
R244 680
R235 33k
R245 1k
R254 0
R206 33k
R216 6.8k
R220 1k
STBY2_5VReg
STBY2_2.5V
STBY2_1.5V
PWR_GD2
Q205 DTC114TE-TL
Q207 DTC114TE-TL
Q209 DTC114TE-TL
Q218 FDS6690A
Q202 FDS6690S
Q200 HAT2198R-EL-E
Q216 HAT2198R-EL-E
L202 10uH
L203 10uH
L206 1uH
L207 1uH
C226 10uF 25V
C227 10uF
R262 0
R263 0
C229 0.1uF 25V
C231 0.1uF 25V
R258 22k
R259 22k
R266 0
R267 0
C239 150uF 4V
C240 22uF 20V
C241 180uF 2.5V
C244 10uF 6.3V
C245 10uF 6.3V
C248 10uF 6.3V
C249 10uF 6.3V
+2.5V
+1.5V
S-GND
P-GND
001-AC8
H_SHUTDOWN
Q221 DTC144EE-TL
Q222 DTC114TE-TL
GND
+4.9V 3 (3/14) CN2
+4.9V 4 (4/14) CN2
+3.3V 5 (5/14) CN2
+3.3V 6 (6/14) CN2
+3.3V 7 (7/14) CN2
+2.5V 8 (8/16) CN3
+2.5V 9 (9/16) CN3
+1.5V 5 (5/16) CN3
+1.5V 6 (6/16) CN3
+1.5V 7 (7/16) CN3

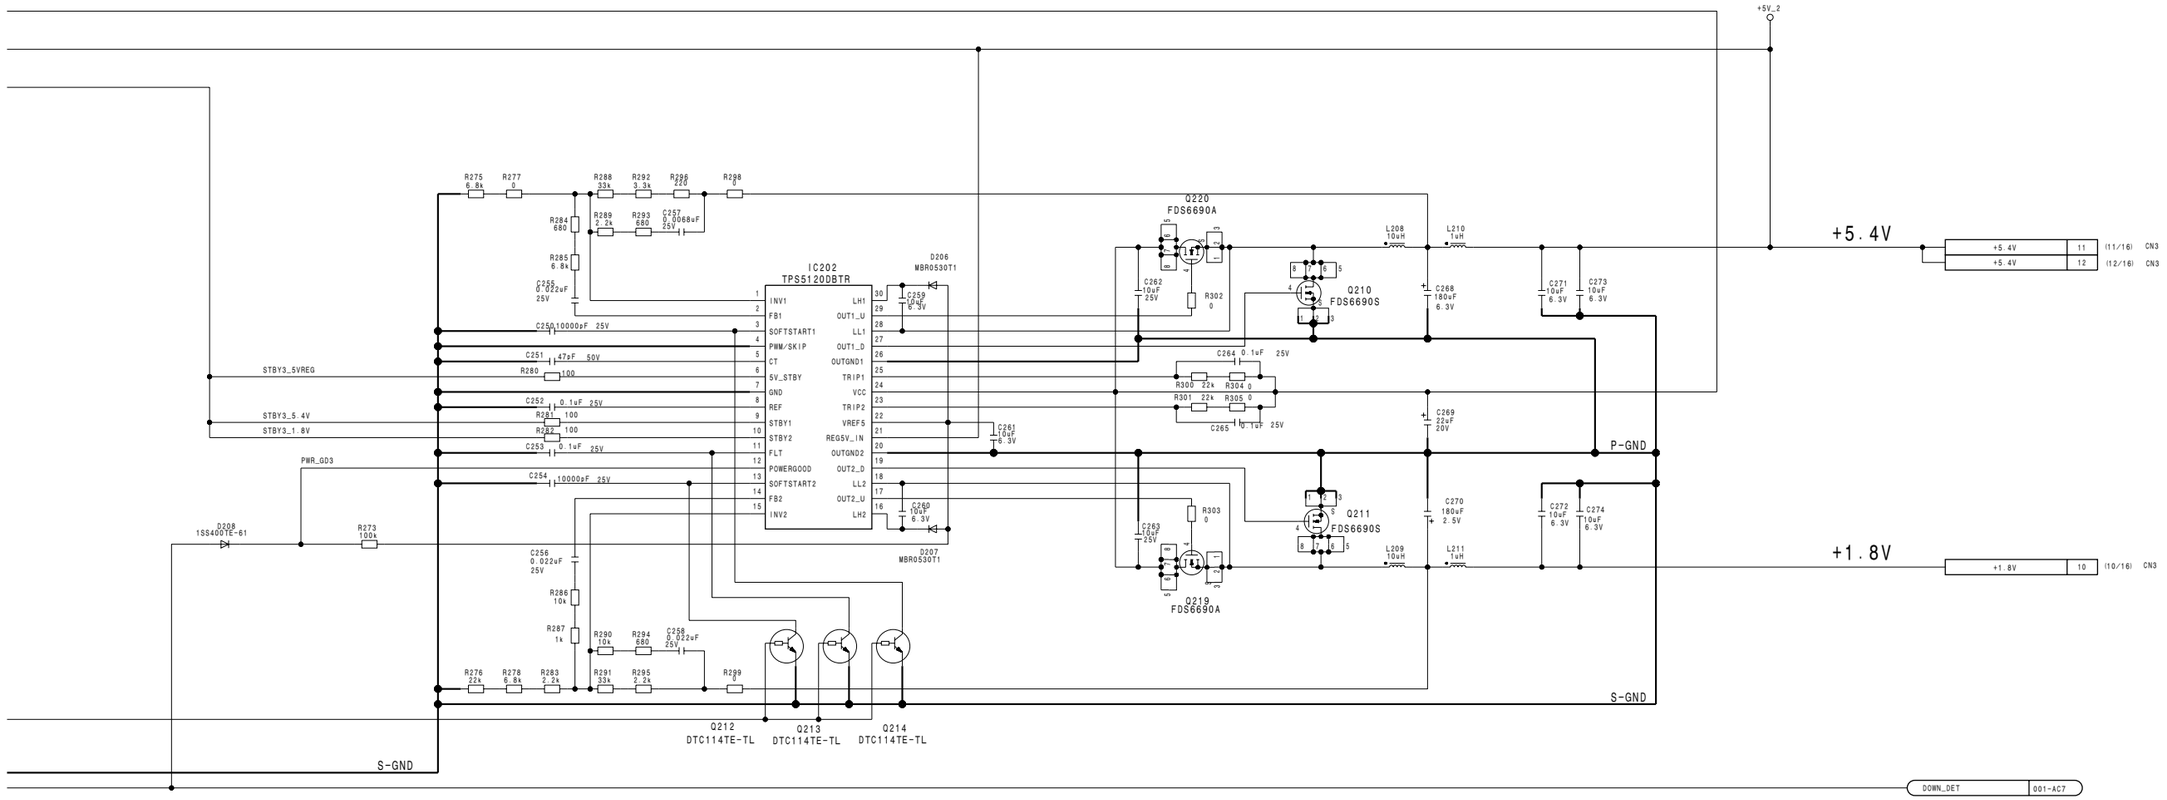
+5V_2
+5.4V
+1.8V
P-GND
S-GND
IC202
TPS5120DBTR
INV1
FB1
SOFTSTART1
PWM/SKIP
CT
5V_STBY
GND
REF
STBY1
STBY2
FLT
POWERGOOD
SOFTSTART2
FB2
INV2
LH1
OUT1_U
LL1
OUT1_D
OUTGND1
TRIP1
VCC
TRIP2
VREF5
REG5V_IN
OUTGND2
OUT2_D
LL2
OUT2_U
LH2
Q220
FDS6690A
Q210
FDS6690S
Q211
FDS6690S
Q219
FDS6690A
Q212
DTC114TE-TL
Q213
DTC114TE-TL
Q214
DTC114TE-TL
D206
MBR0530T1
D207
MBR0530T1
D208
1SS400TE-61
STBY3_5VREG
STBY3_5.4V
STBY3_1.8V
PWR_GD3
+5.4V
+5.4V
11
(11/16) CN3
+5.4V
12
(12/16) CN3
+1.8V
10
(10/16) CN3
DOWN_DET
001-AC7

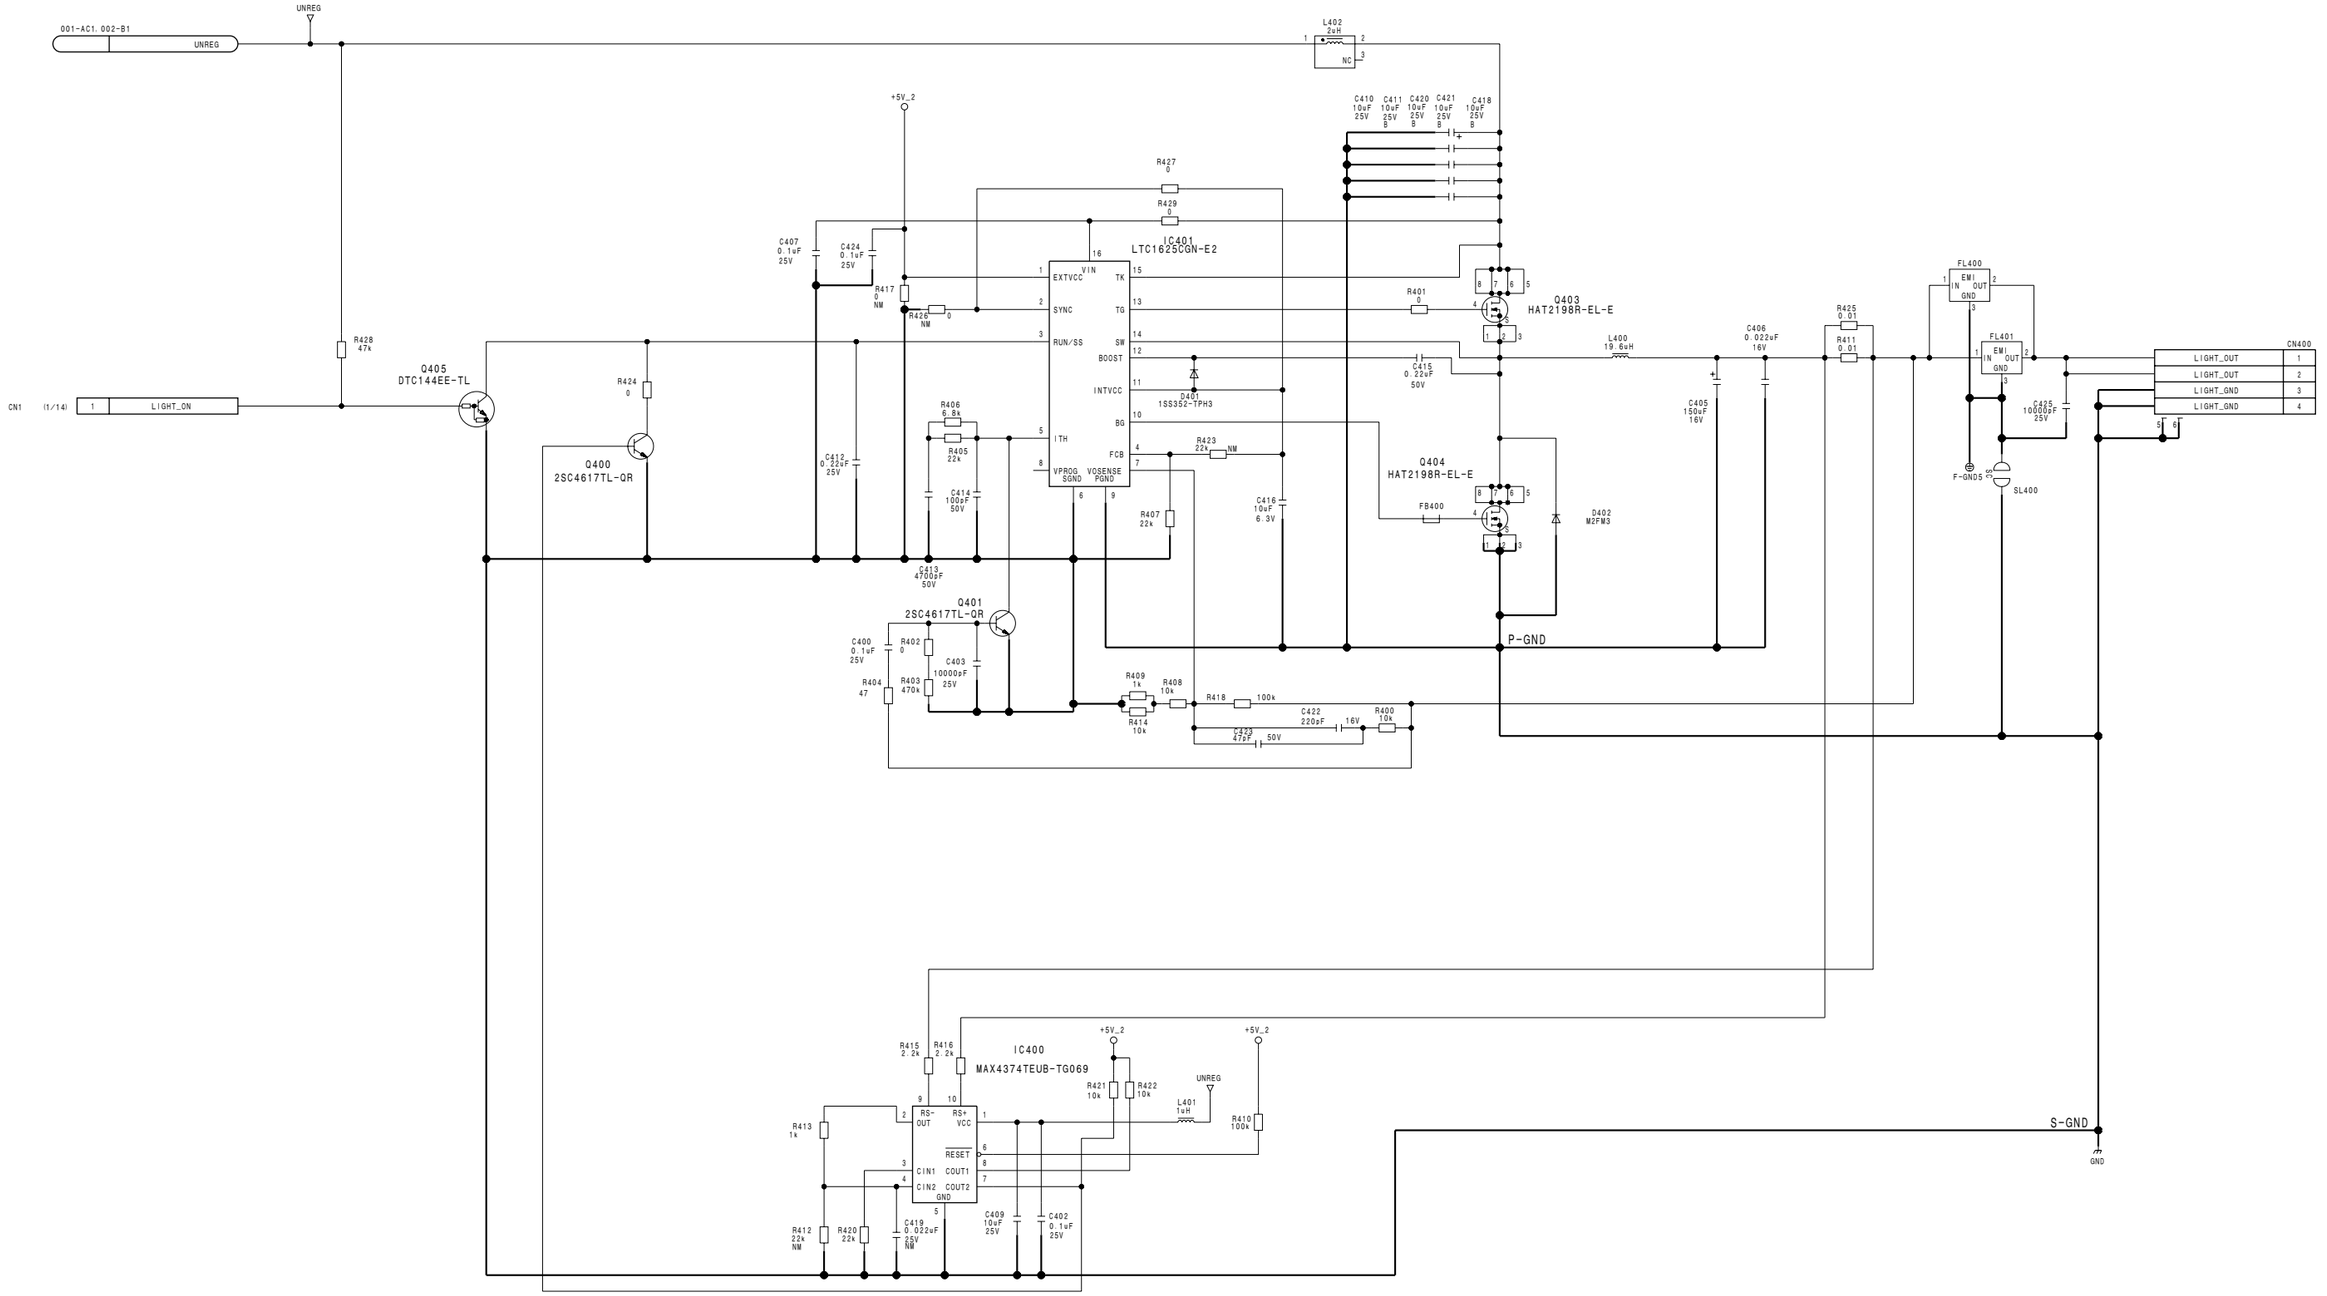

RE-236 (3/3)
BOARD NO. 1-869-663-11
VCX-415_RE-236_004_3

RM-203, RX-96, SE-709, SE-743
SUFFIX: -11 SUFFIX: -11 SUFFIX: -13 SUFFIX: -11

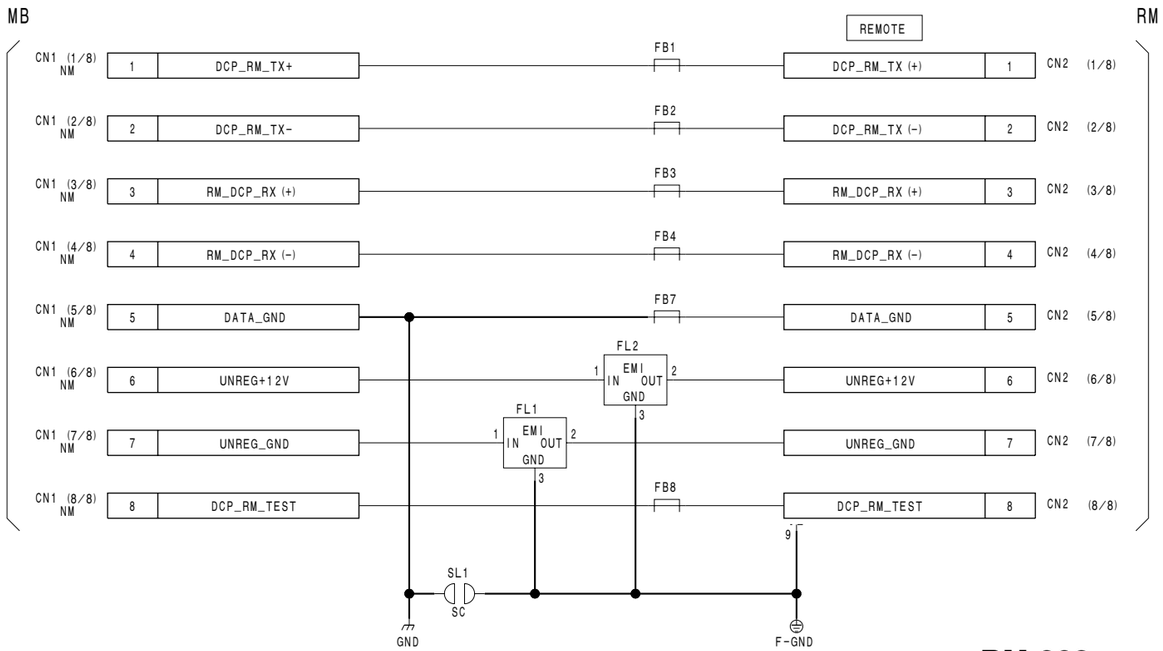

RM-203

BOARD NO. 1-869-501-11
PDW-F330K_RM-203_110_1

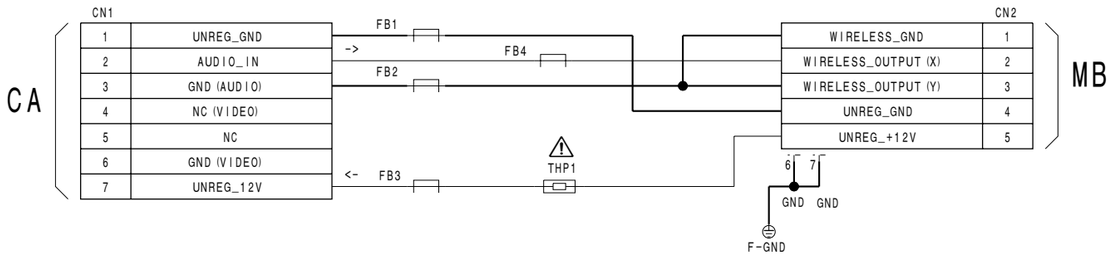

RX-96

BOARD NO. 1-869-496-11
PDW-F330K_RX-96_110_1

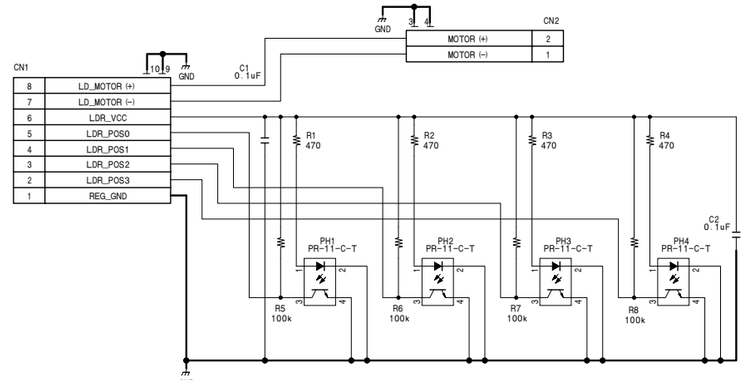

SE-709

BOARD NO. 1-869-663-13
PDW-V1_SE-709_013_1

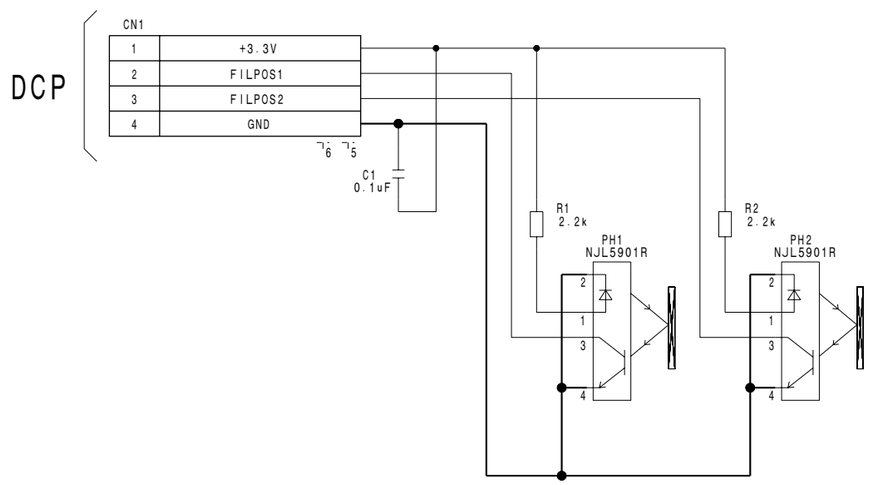

SE-743

BOARD NO. 1-869-518-11
PDW-F330K_SE-743_110_1

SE-800, SW-1124, SW-1125G
SUFFIX: -11 SUFFIX: -21 SUFFIX: -21

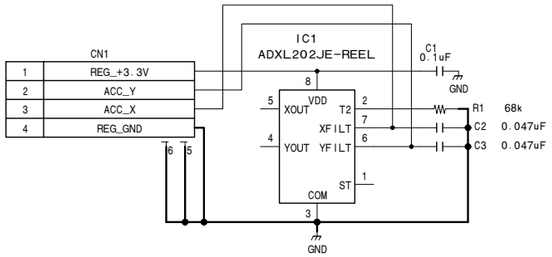

SE-800

BOARD NO. 1-865-836-11

BRD-P10_SE-800_011_1

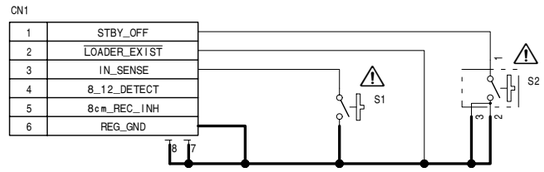

SW-1125G

BOARD NO. 1-689-980-21

PDW-V1_SW-1125_012_1

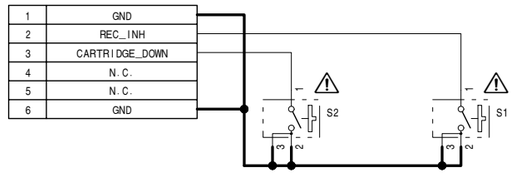

SW-1124

BOARD NO. 1-689-981-21

PDW-V1_SW-1124_012_1

SW-1246, SW-1249, TC-110
SUFFIX: -11 **SUFFIX: -11** **SUFFIX: -11**

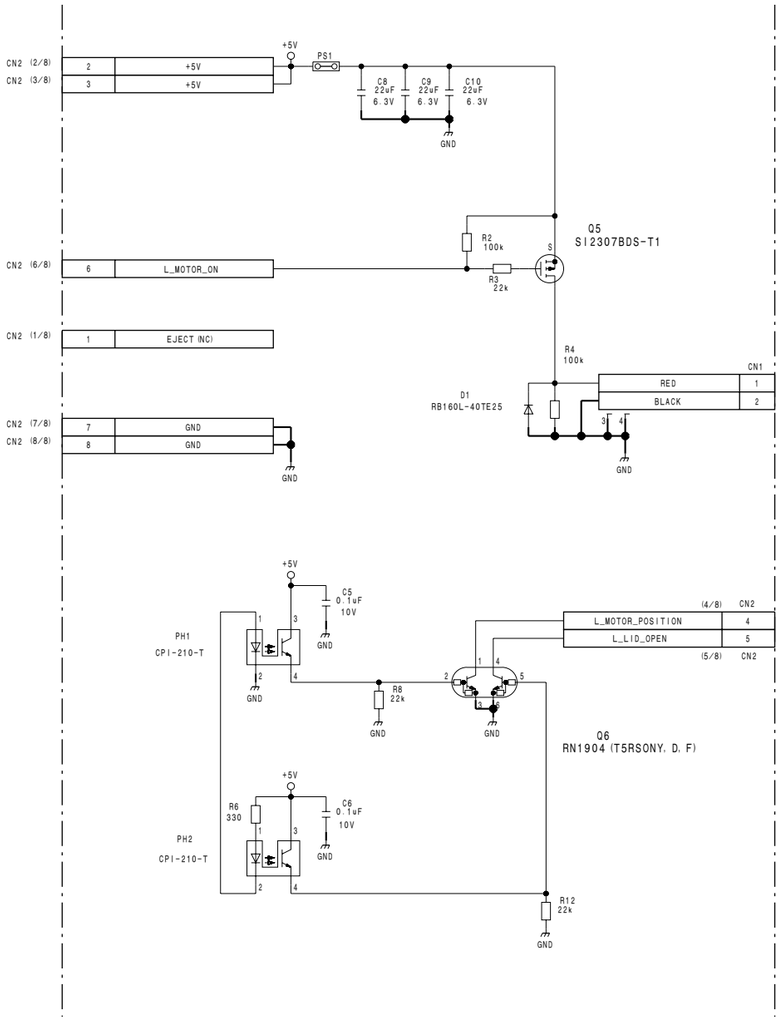

SW-1246

BOARD NO. 1-869-808-11

PDW-F350_SW-1246_11F_1

CN

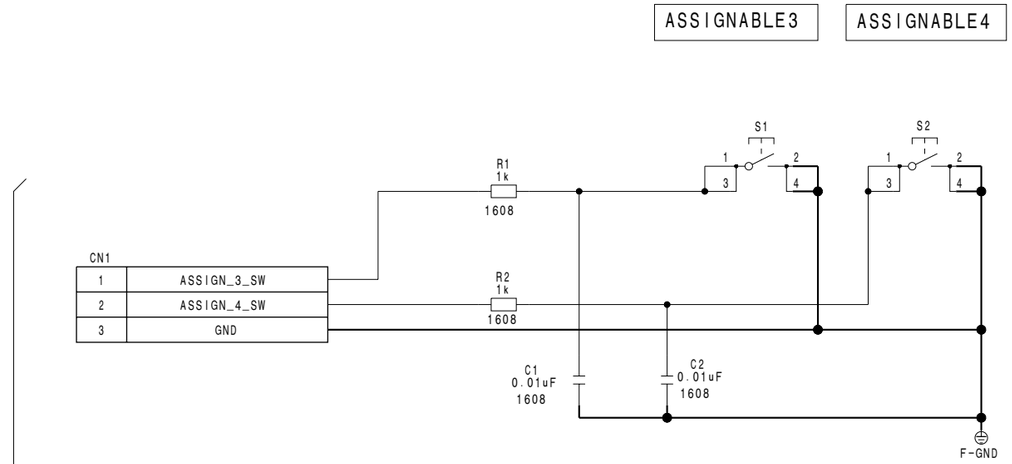

SW-1249

BOARD NO. 1-869-505-11

PDW-F350_SW-1246_11F_1

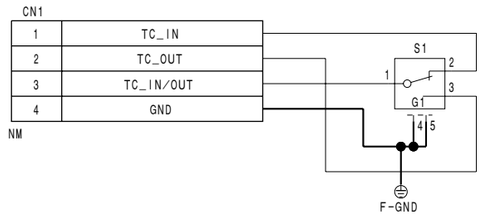

TC-110

BOARD NO. 1-869-497-11

PDW-F330K_TC-110_110_1

SY-322 (1/5)
SUFFIX: -12

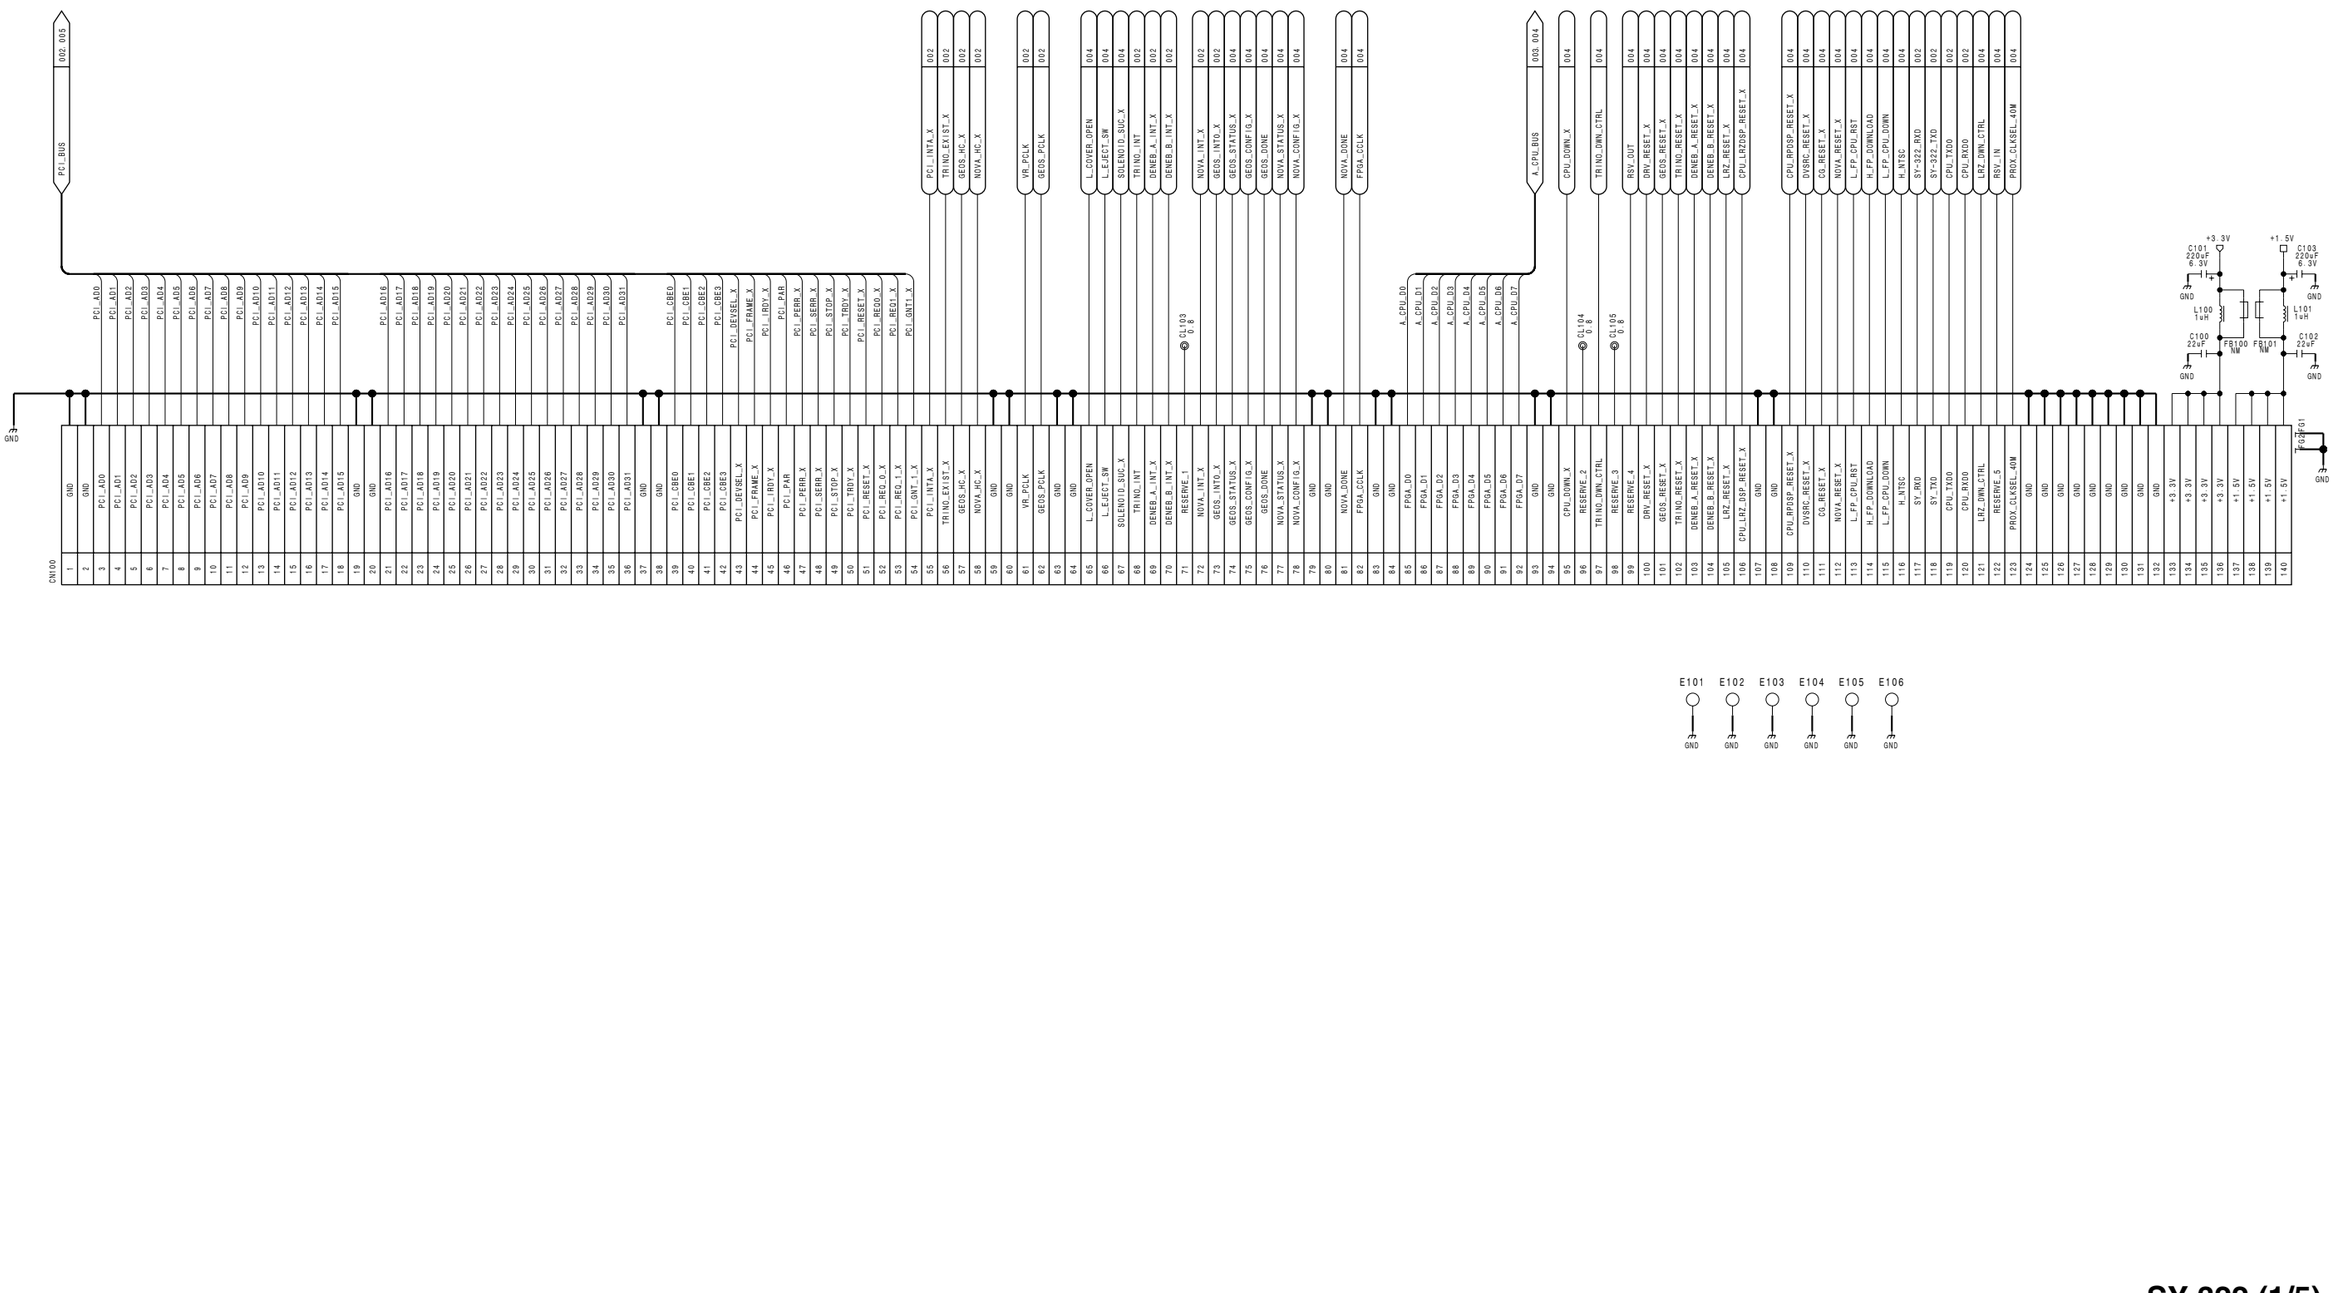

4-136

SY-322 (2/5)
SUFFIX: -12

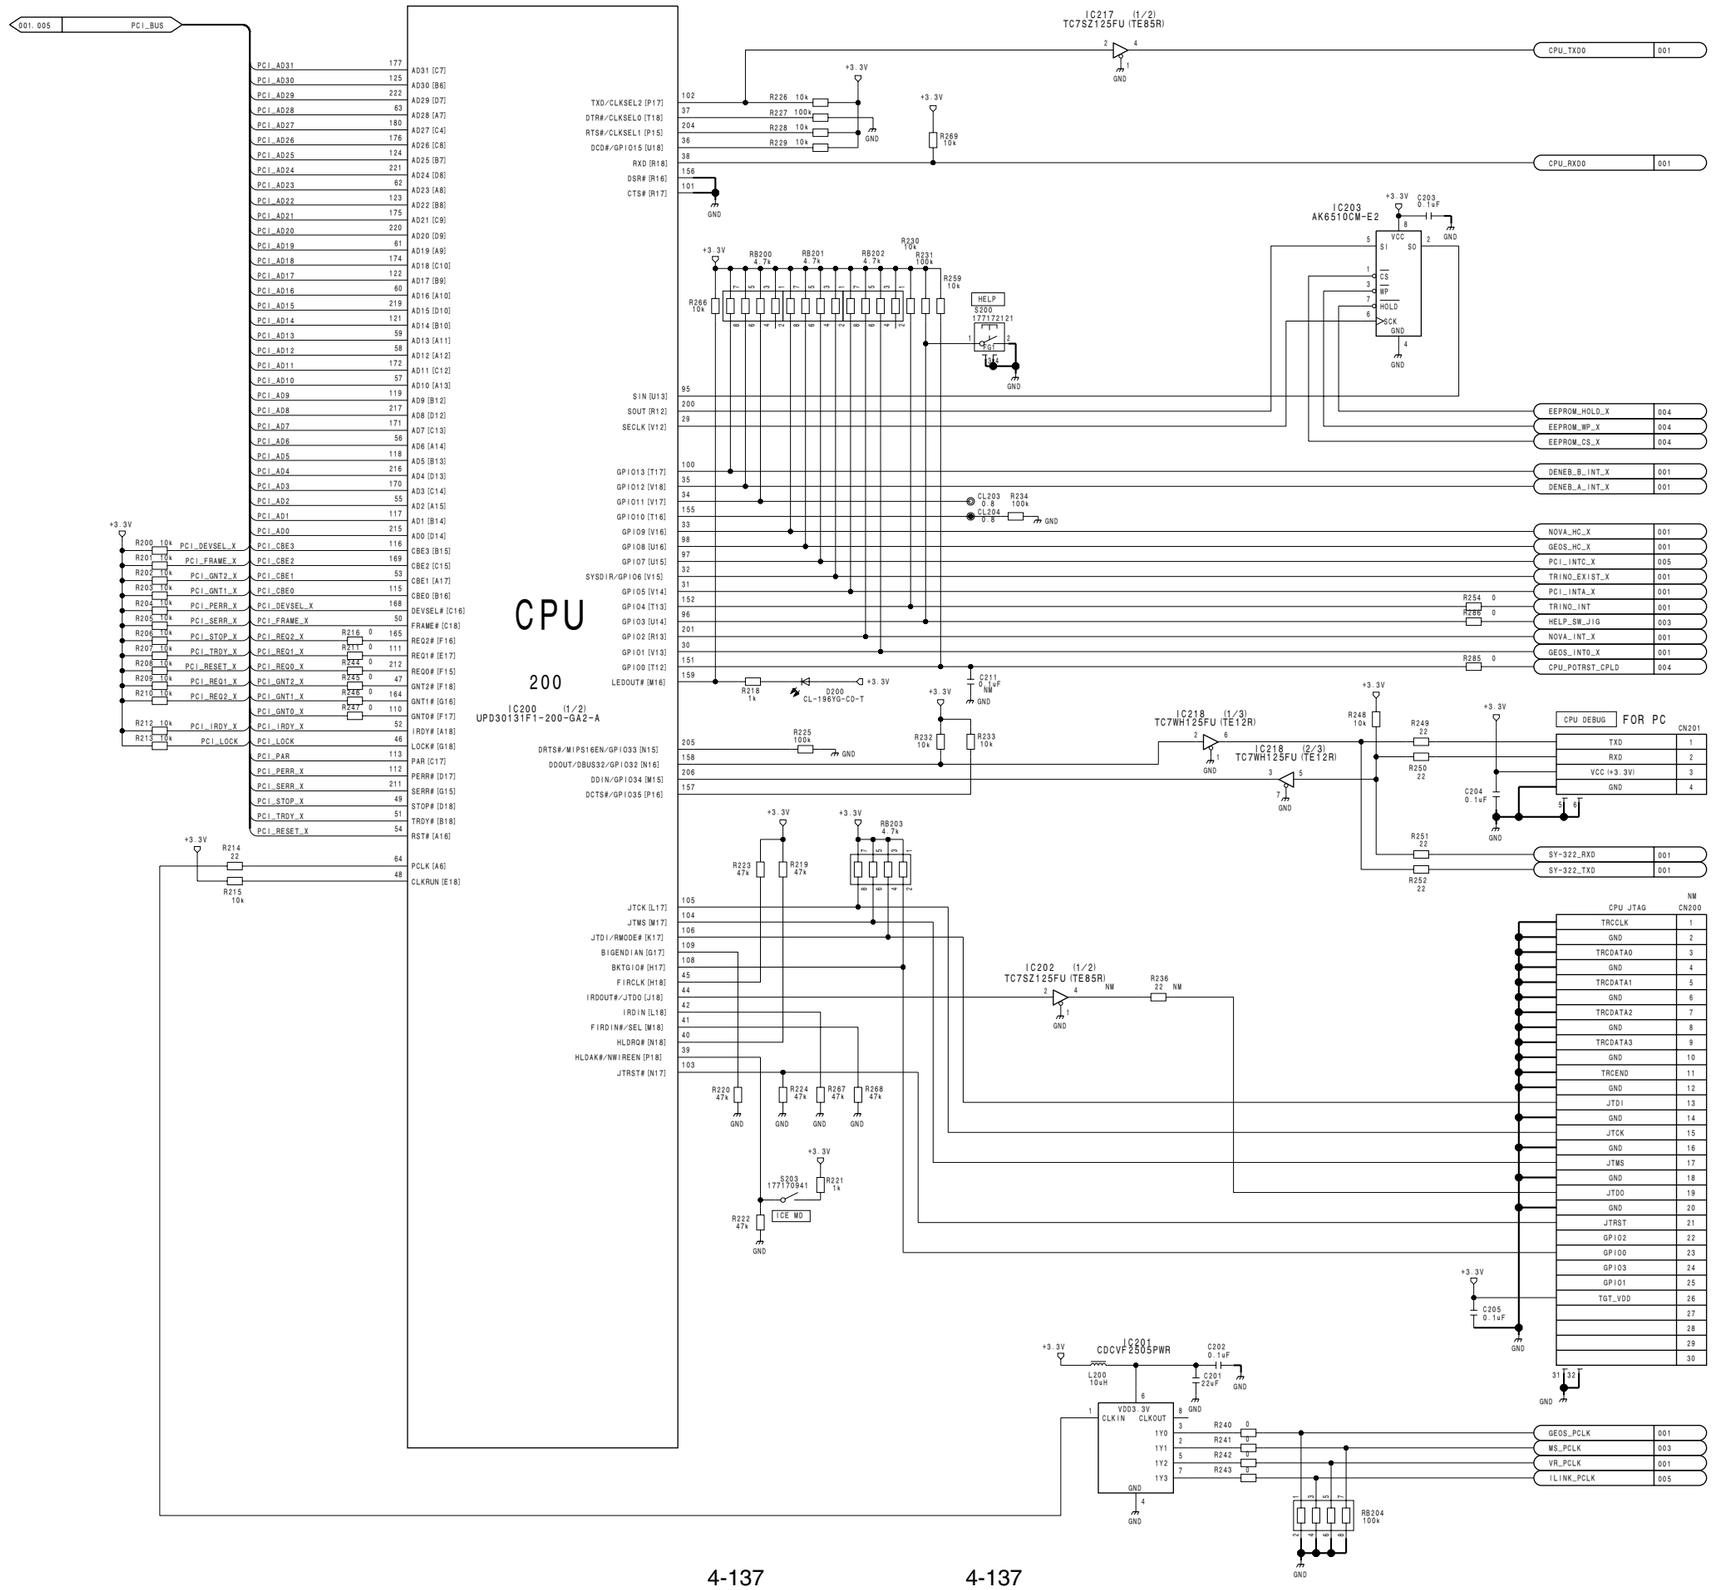

SY-322 (2/5)
SUFFIX: -12

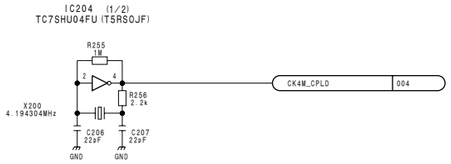

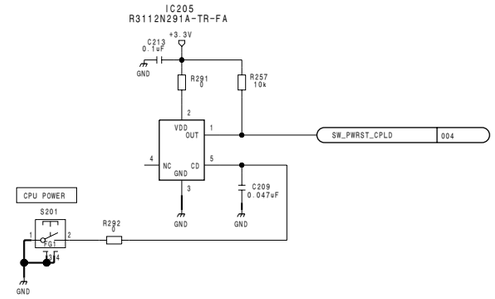

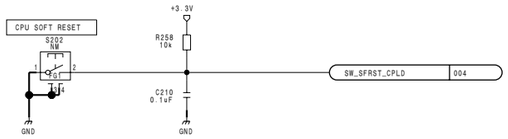

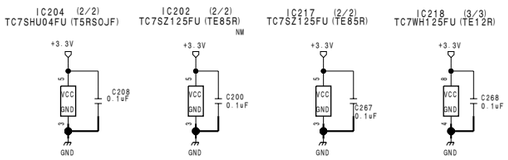

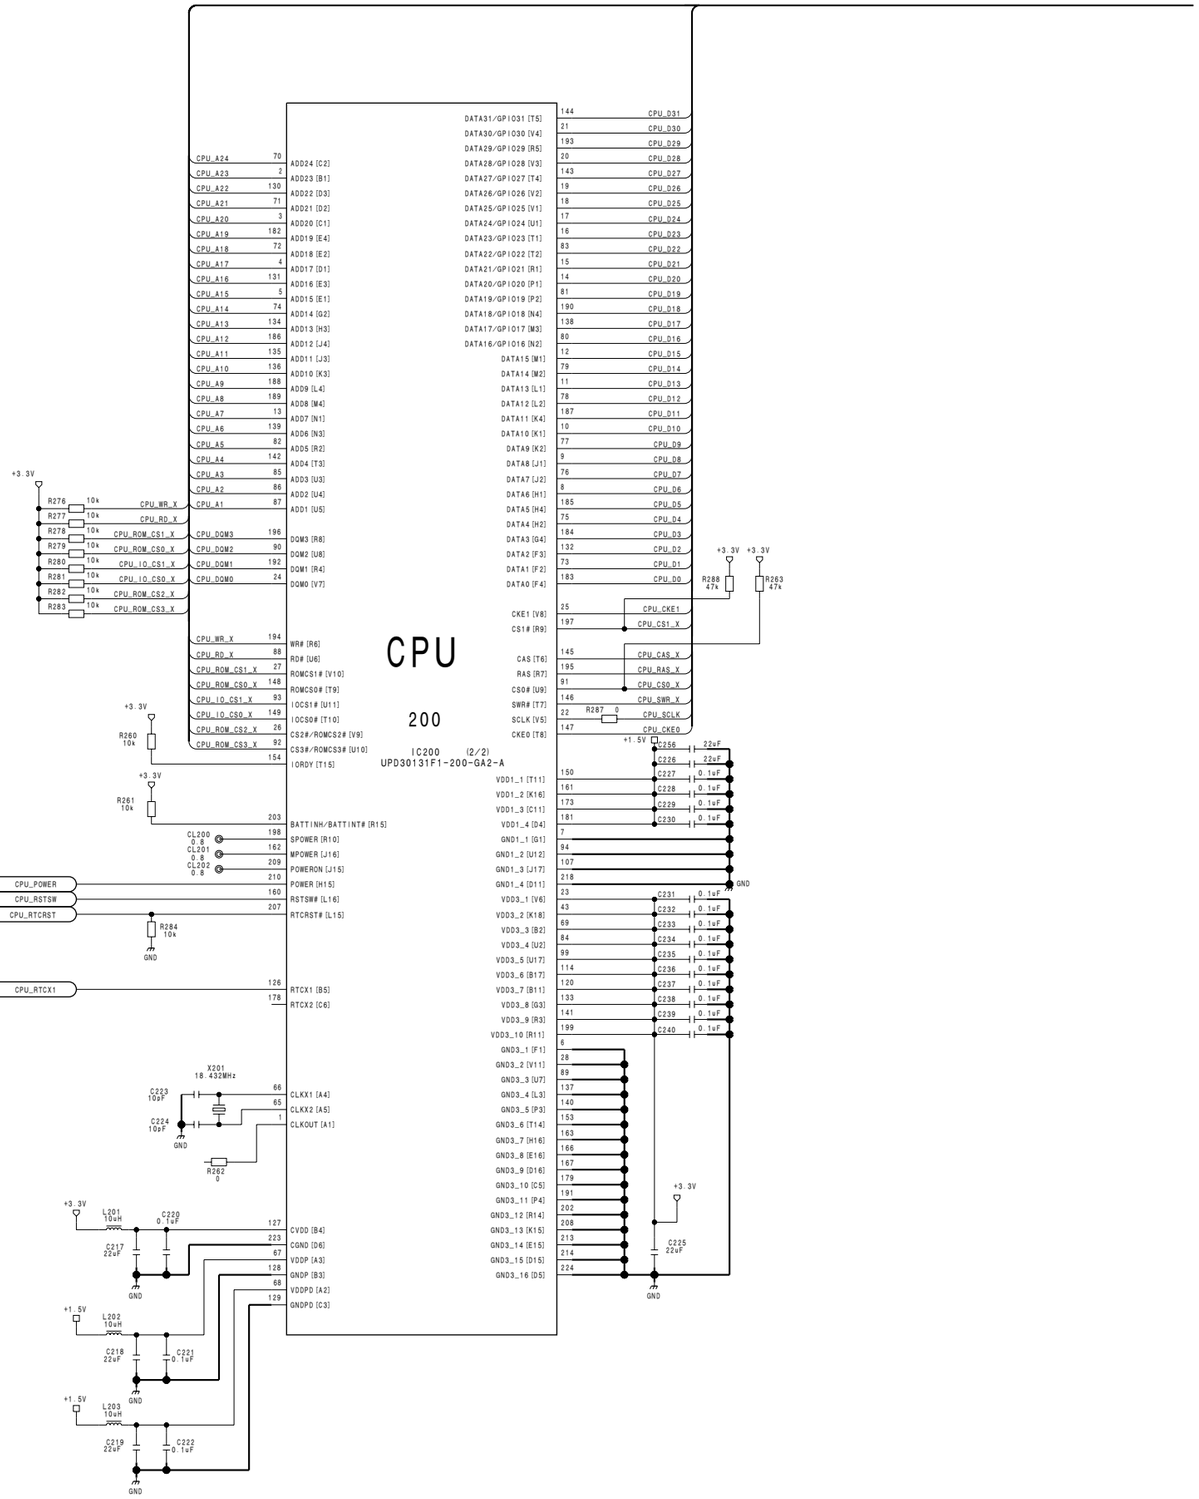

4-138

SY-322 (2/5) **SUFFIX: -12**

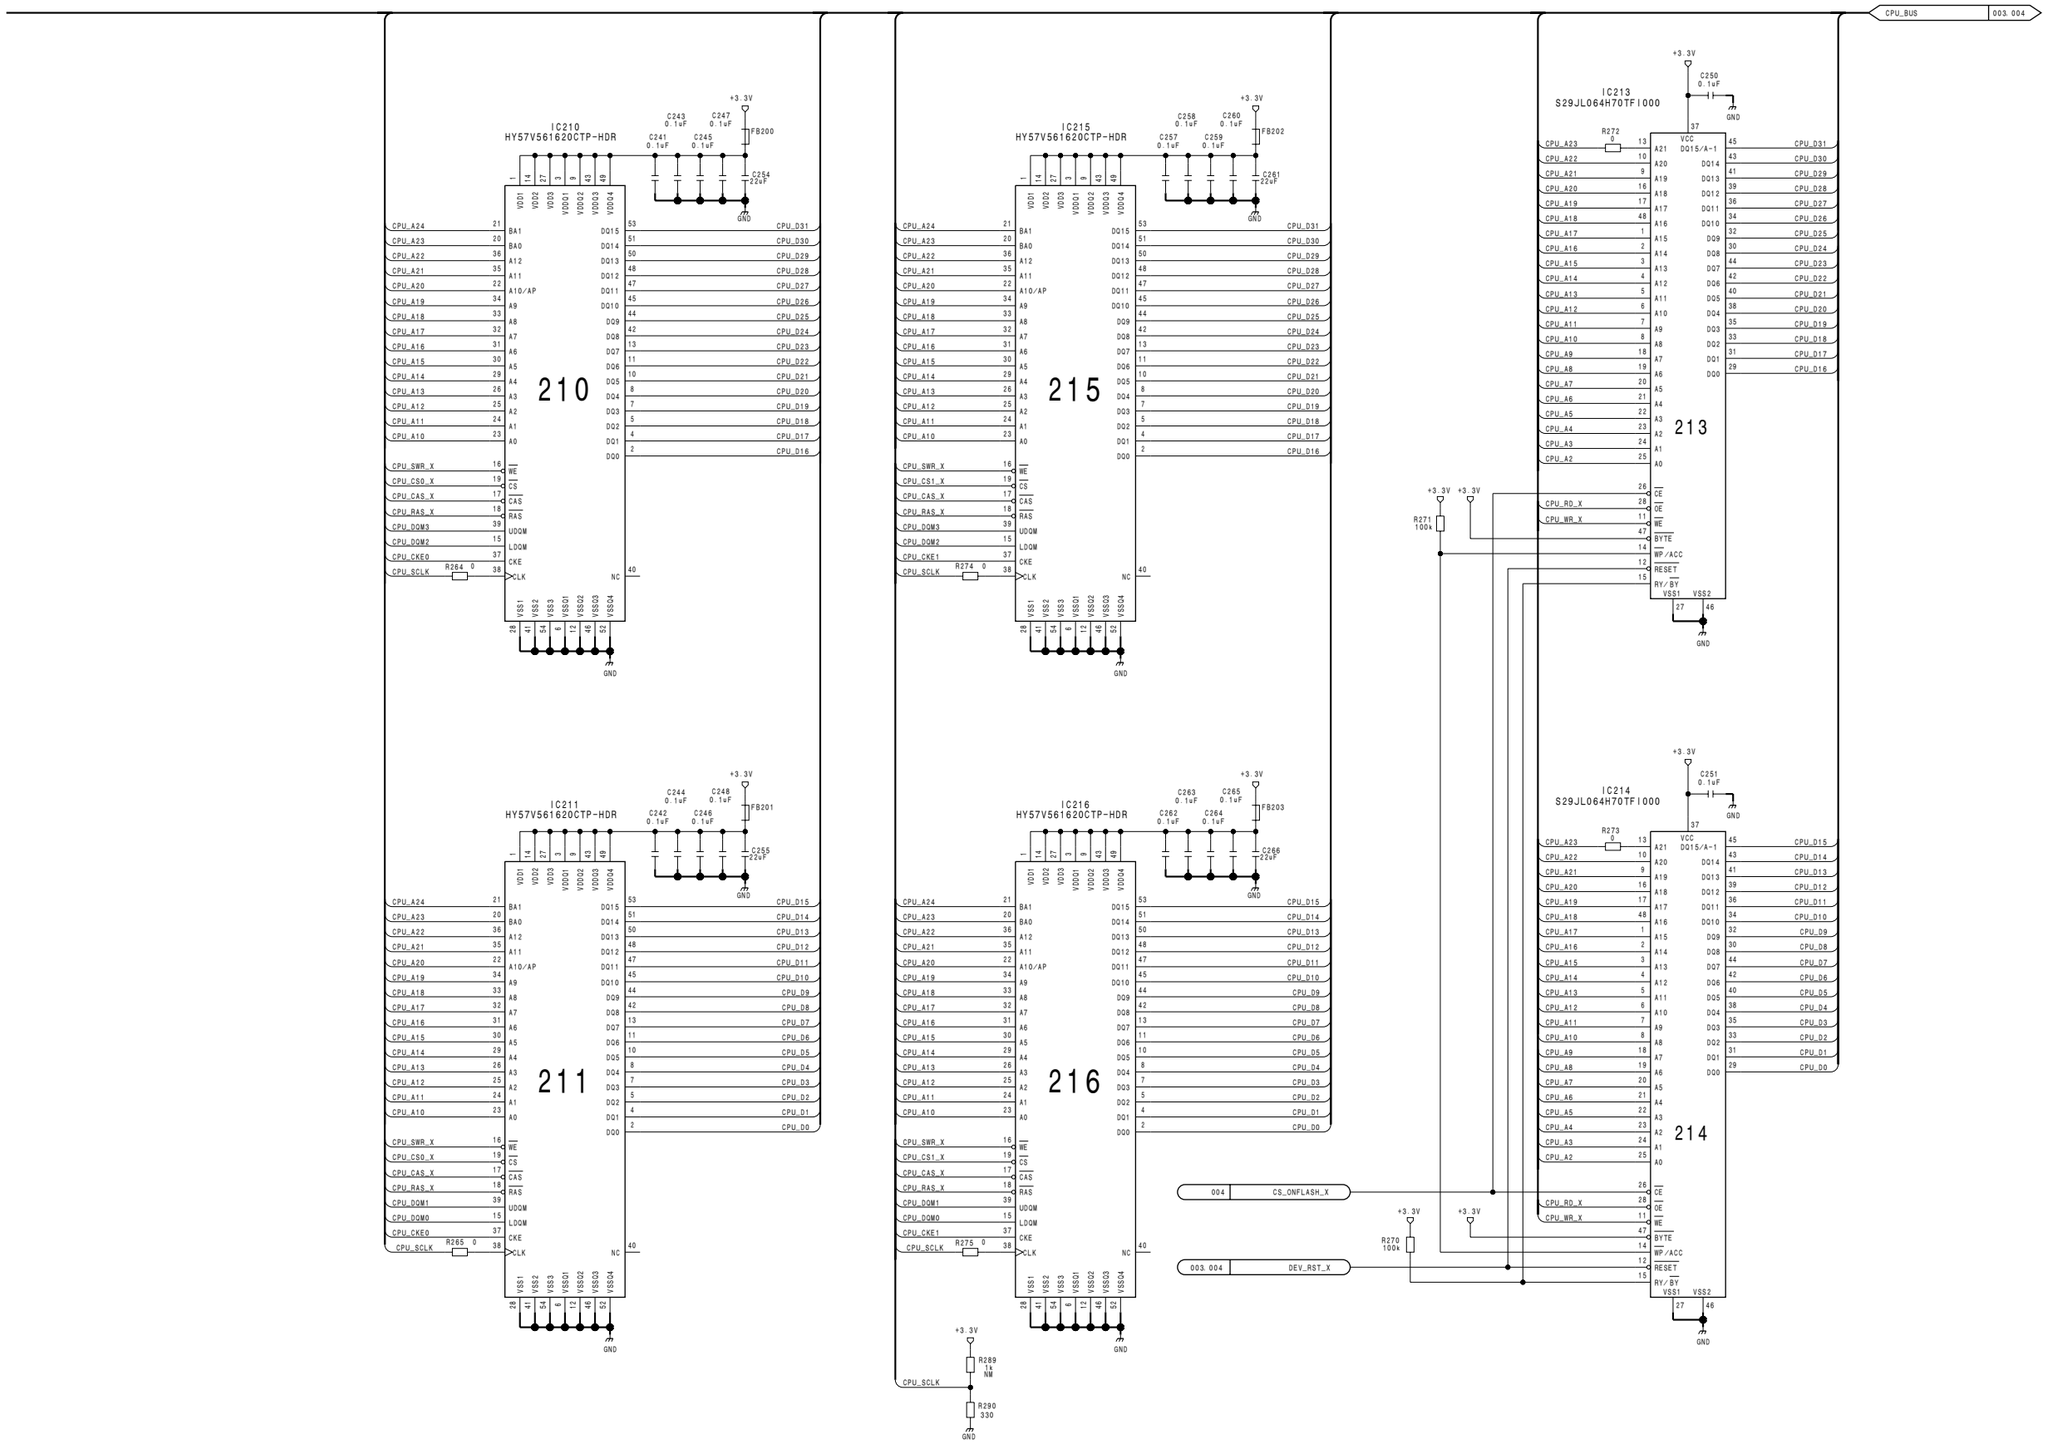

4-139

SY-322 (2/5)
BOARD NO. 1-869-662-12
PDW-F350_SY-322_12F_2

SY-322 (3/5)
SUFFIX: -12

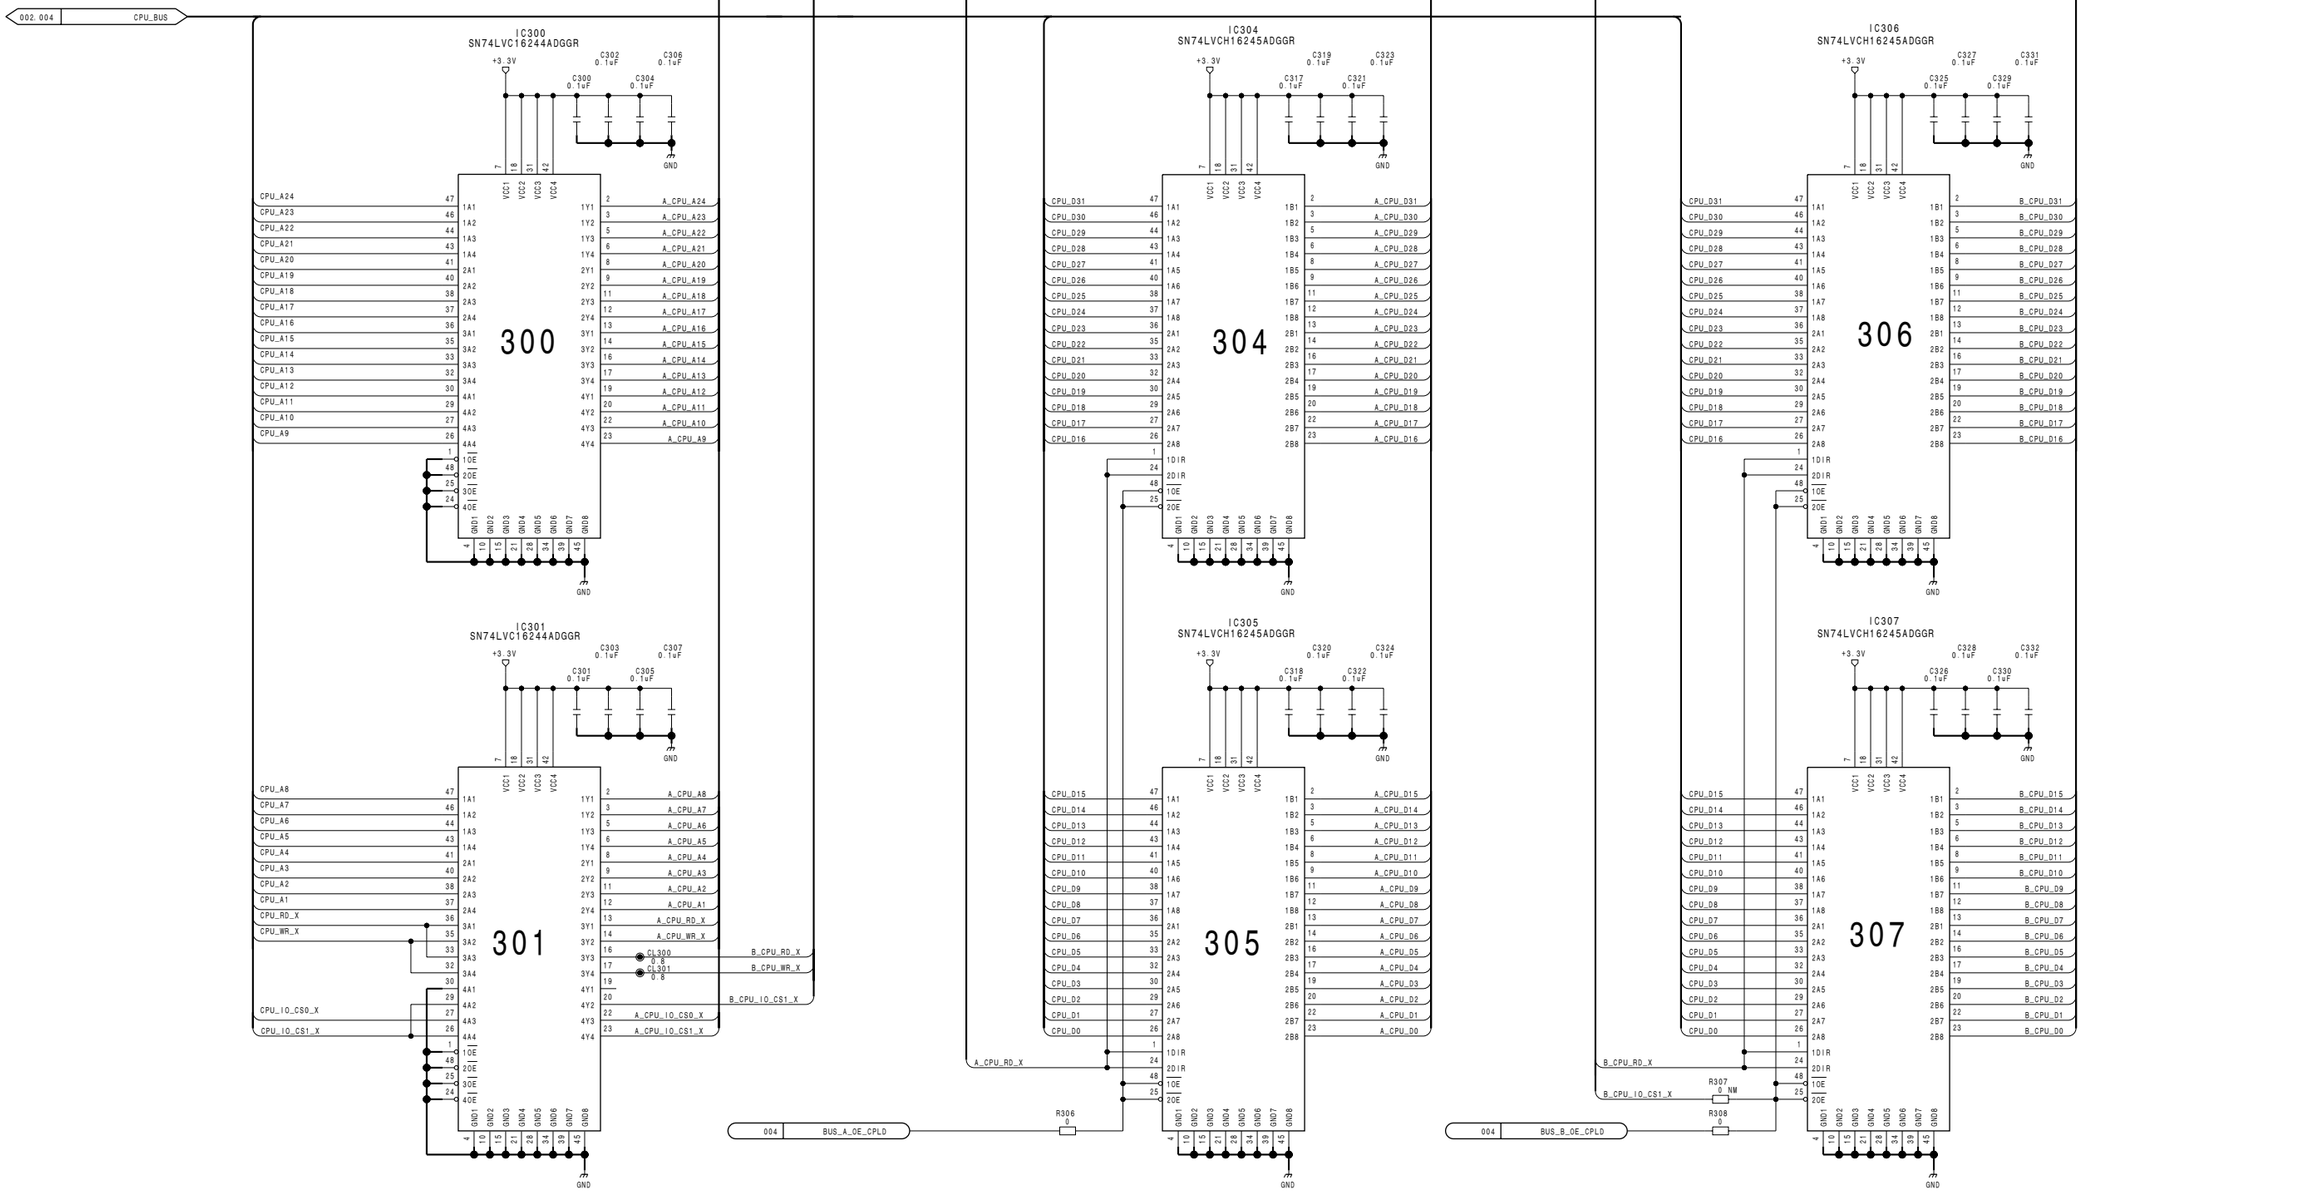

4-140

SY-322 (3/5)
SUFFIX: -12

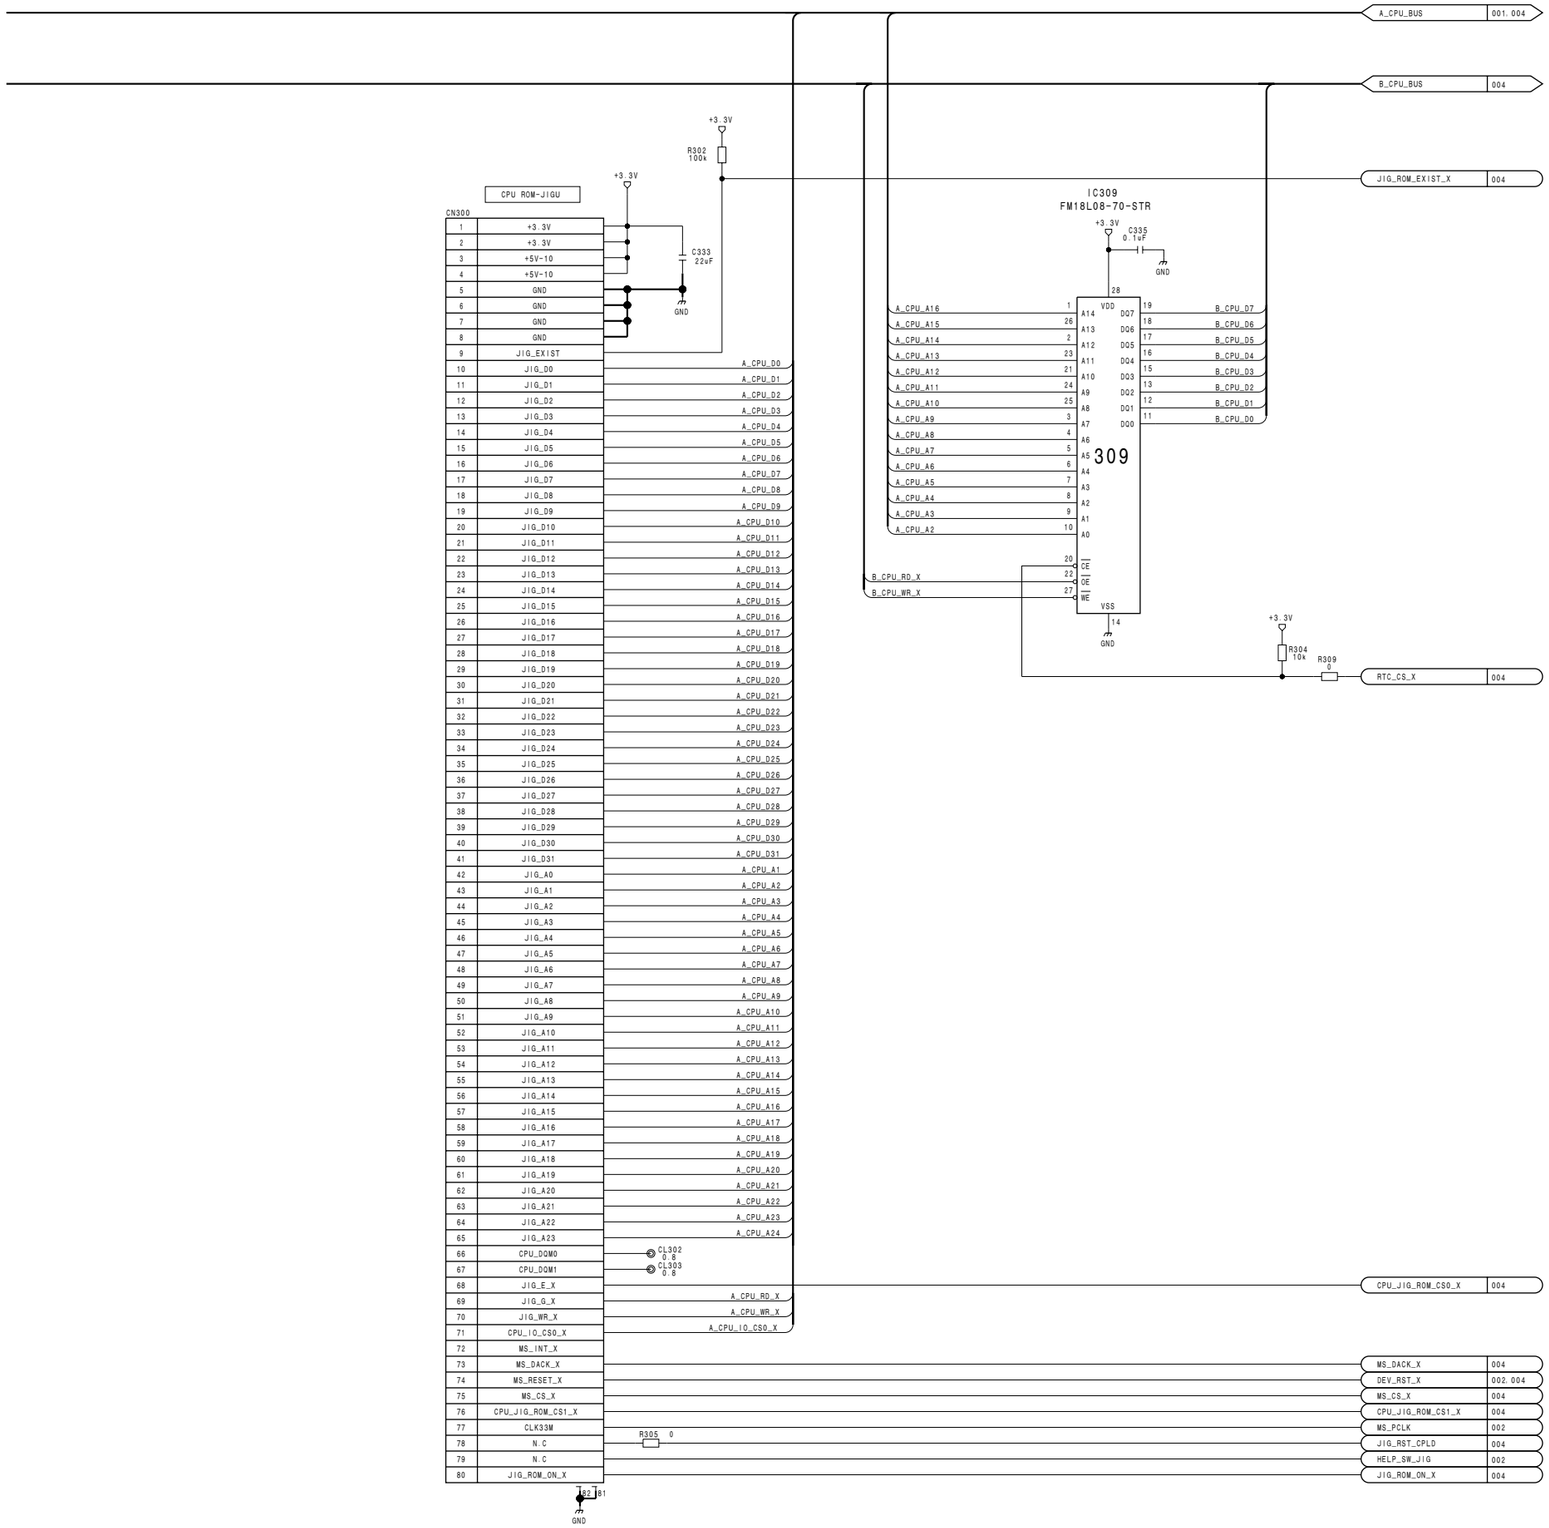

1	+3.3V
2	+3.3V
3	+5V-10
4	+5V-10
5	GND
6	GND
7	GND
8	GND
9	JIG_EXIST
10	JIG_D0
11	JIG_D1
12	JIG_D2
13	JIG_D3
14	JIG_D4
15	JIG_D5
16	JIG_D6
17	JIG_D7
18	JIG_D8
19	JIG_D9
20	JIG_D10
21	JIG_D11
22	JIG_D12
23	JIG_D13
24	JIG_D14
25	JIG_D15
26	JIG_D16
27	JIG_D17
28	JIG_D18
29	JIG_D19
30	JIG_D20
31	JIG_D21
32	JIG_D22
33	JIG_D23
34	JIG_D24
35	JIG_D25
36	JIG_D26
37	JIG_D27
38	JIG_D28
39	JIG_D29
40	JIG_D30
41	JIG_D31
42	JIG_A0
43	JIG_A1
44	JIG_A2
45	JIG_A3
46	JIG_A4
47	JIG_A5
48	JIG_A6
49	JIG_A7
50	JIG_A8
51	JIG_A9
52	JIG_A10
53	JIG_A11
54	JIG_A12
55	JIG_A13
56	JIG_A14
57	JIG_A15
58	JIG_A16
59	JIG_A17
60	JIG_A18
61	JIG_A19
62	JIG_A20
63	JIG_A21
64	JIG_A22
65	JIG_A23
66	CPU_DQM0
67	CPU_DQM1
68	JIG_E_X
69	JIG_G_X
70	JIG_WR_X
71	CPU_IO_CS0_X
72	MS_INT_X
73	MS_DACK_X
74	MS_RESET_X
75	MS_CS_X
76	CPU_JIG_ROM_CS1_X
77	CLK33M
78	N.C
79	N.C
80	JIG_ROM_ON_X

A14	1	19	DQ7
A13	26	18	DQ6
A12	2	17	DQ5
A11	23	16	DQ4
A10	21	15	DQ3
A9	24	13	DQ2
A8	25	12	DQ1
A7	3	11	DQ0
A6	4		
A5	5		
A4	6		
A3	7		
A2	8		
A1	9		
A0	10		
CE	20		
OE	22		
WE	27		
VDD	28		
VSS	14		

A_CPU_A16	1
A_CPU_A15	26
A_CPU_A14	2
A_CPU_A13	23
A_CPU_A12	21
A_CPU_A11	24
A_CPU_A10	25
A_CPU_A9	3
A_CPU_A8	4
A_CPU_A7	5
A_CPU_A6	6
A_CPU_A5	7
A_CPU_A4	8
A_CPU_A3	9
A_CPU_A2	10

B_CPU_D7	19
B_CPU_D6	18
B_CPU_D5	17
B_CPU_D4	16
B_CPU_D3	15
B_CPU_D2	13
B_CPU_D1	12
B_CPU_D0	11

A_CPU_D0	A_CPU_D1
A_CPU_D2	A_CPU_D3
A_CPU_D4	A_CPU_D5
A_CPU_D6	A_CPU_D7
A_CPU_D8	A_CPU_D9
A_CPU_D10	A_CPU_D11
A_CPU_D12	A_CPU_D13
A_CPU_D14	A_CPU_D15
A_CPU_D16	A_CPU_D17
A_CPU_D18	A_CPU_D19
A_CPU_D20	A_CPU_D21
A_CPU_D22	A_CPU_D23
A_CPU_D24	A_CPU_D25
A_CPU_D26	A_CPU_D27
A_CPU_D28	A_CPU_D29
A_CPU_D30	A_CPU_D31
A_CPU_A1	A_CPU_A2
A_CPU_A3	A_CPU_A4
A_CPU_A5	A_CPU_A6
A_CPU_A7	A_CPU_A8
A_CPU_A9	A_CPU_A10
A_CPU_A11	A_CPU_A12
A_CPU_A13	A_CPU_A14
A_CPU_A15	A_CPU_A16
A_CPU_A17	A_CPU_A18
A_CPU_A19	A_CPU_A20
A_CPU_A21	A_CPU_A22
A_CPU_A23	A_CPU_A24

4-141

SY-322 (3/5)
BOARD NO. 1-869-662-12
PDW-F350_SY-322_12F_3

SY-322 (4/5)
SUFFIX: -12

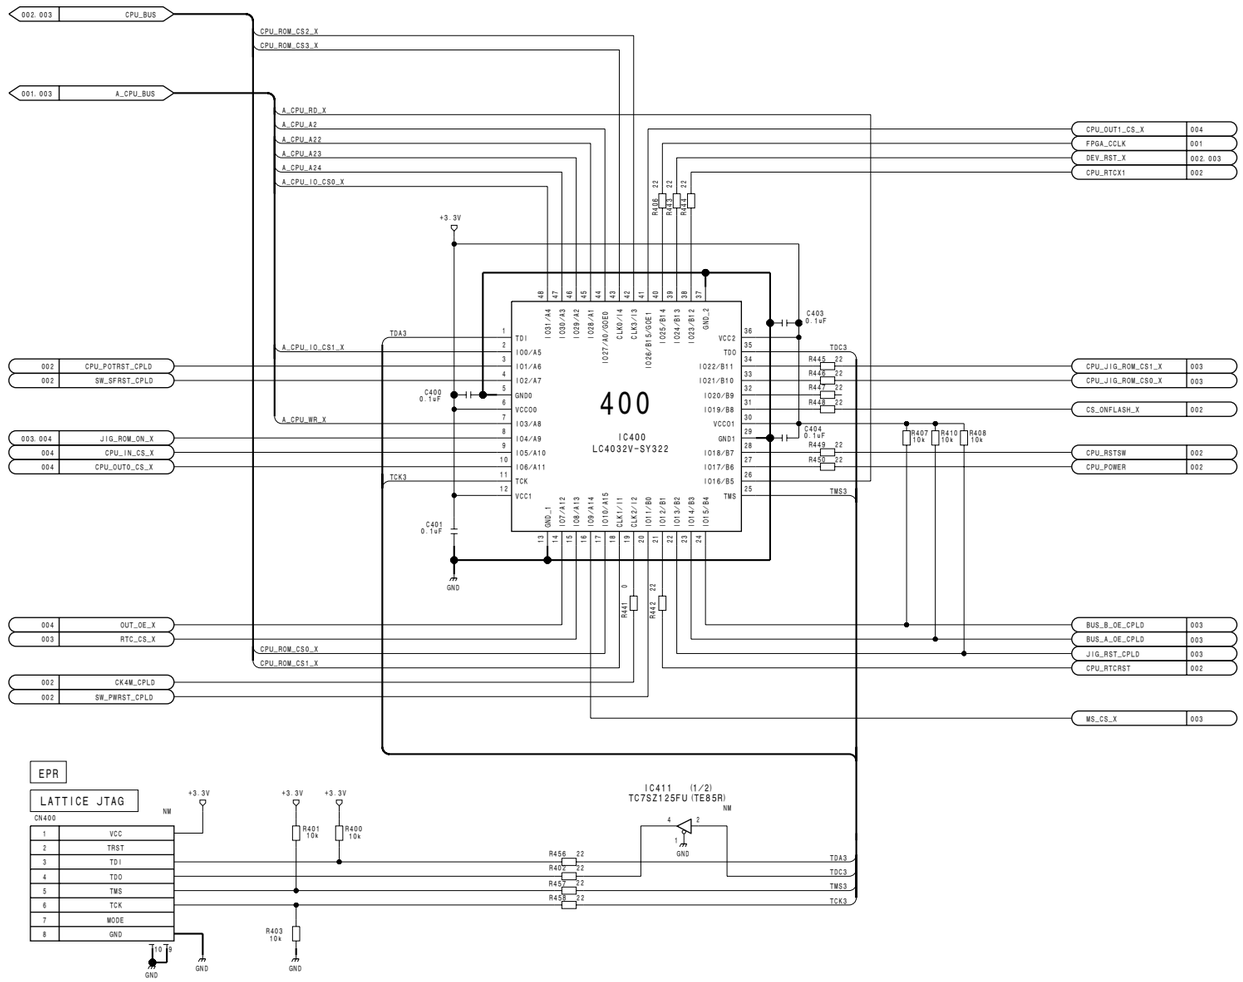

4-142

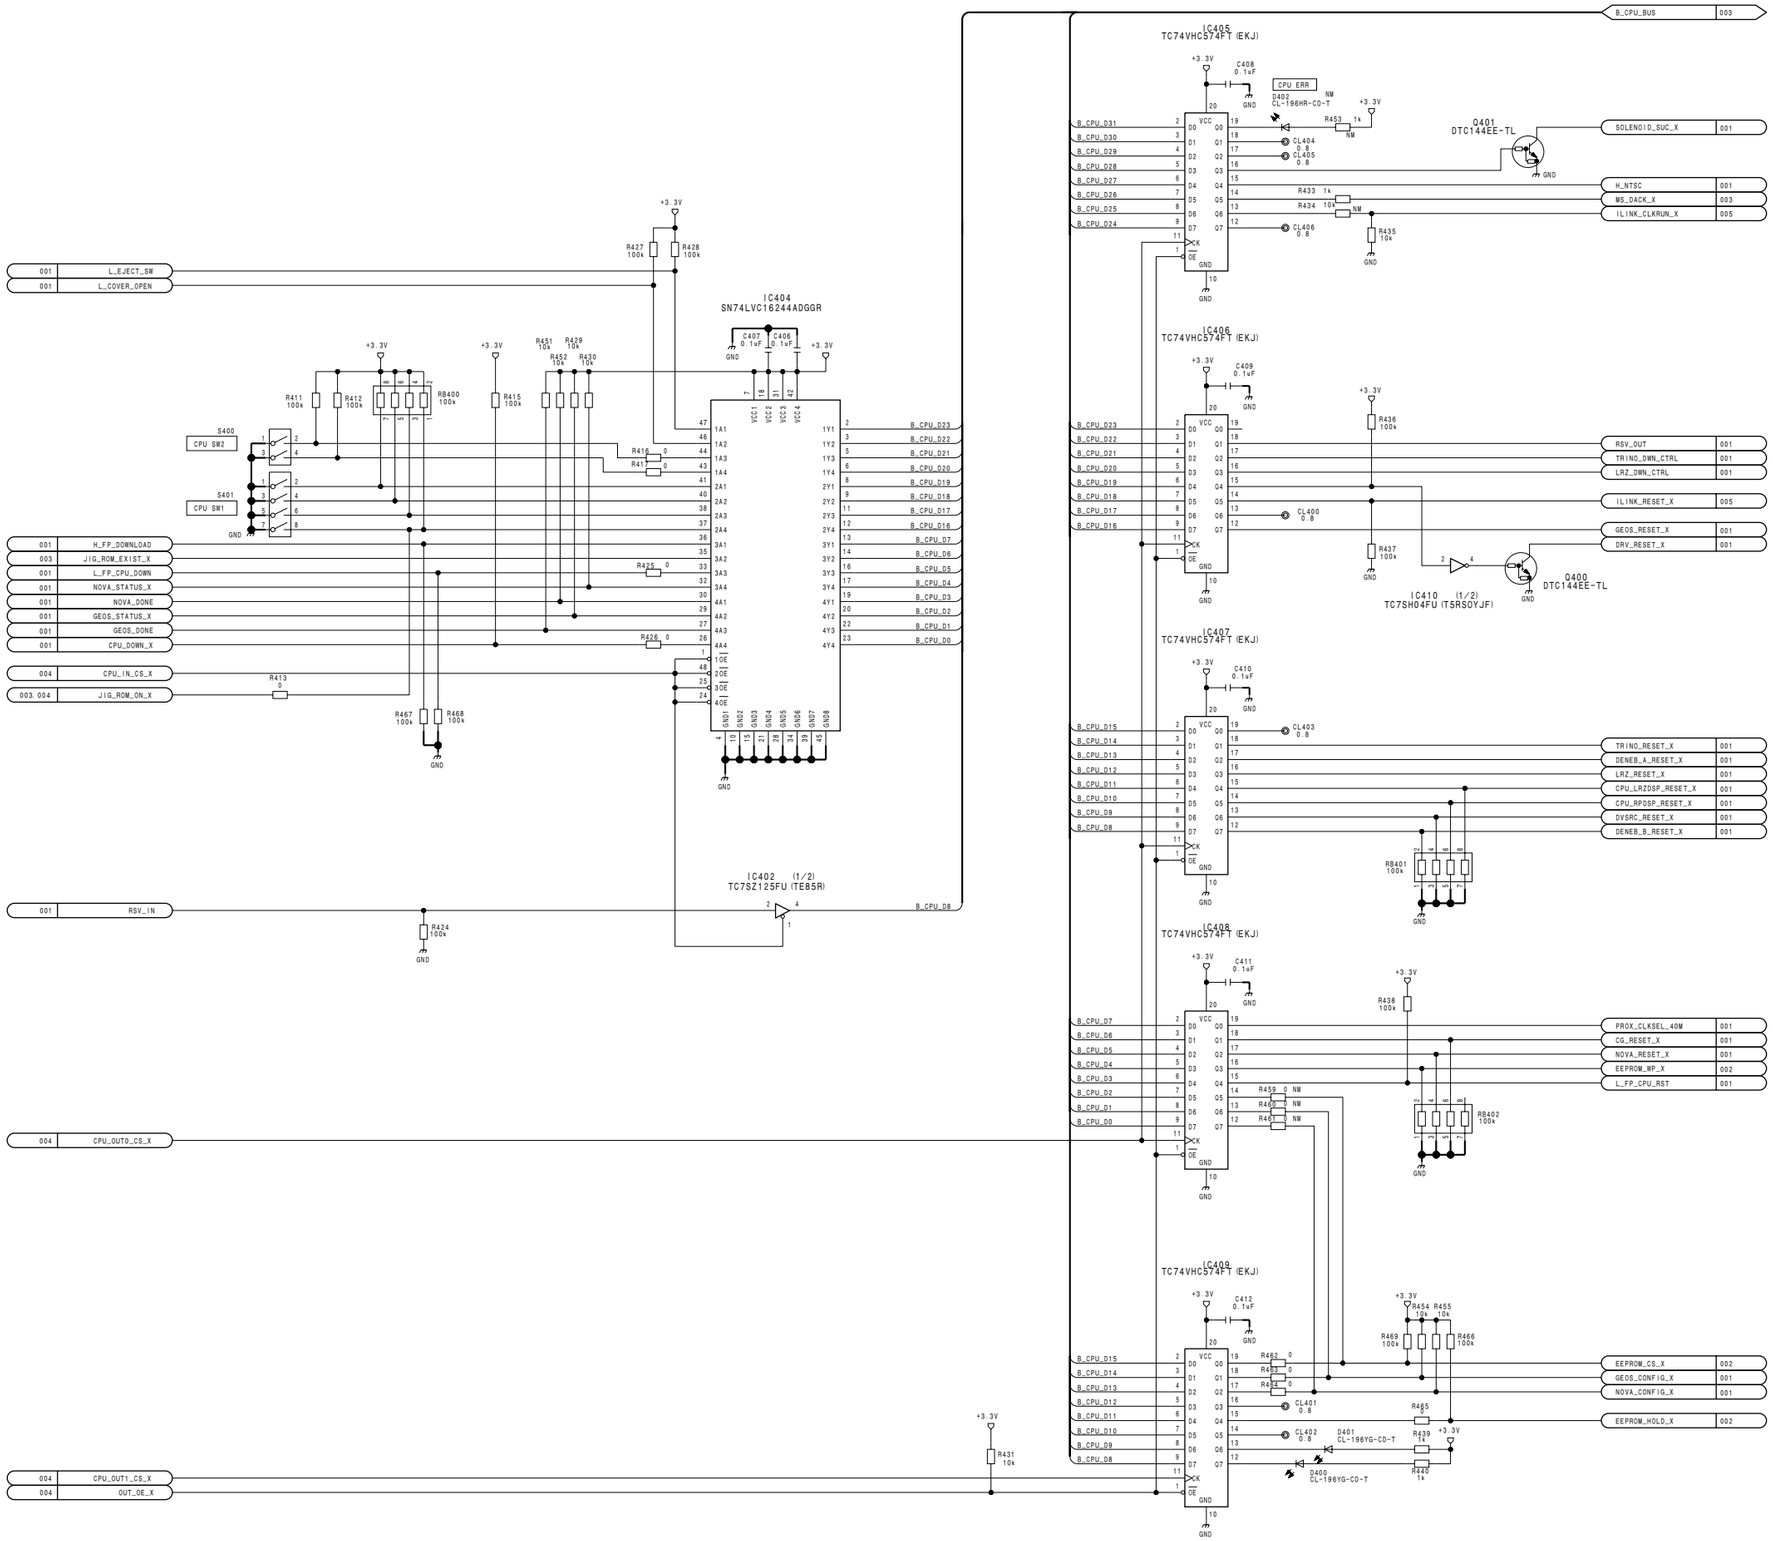

SY-322 (4/5)
BOARD NO. 1-869-662-12
PDW-F350_SY-322_12F_4

SY-322 (5/5)
SUFFIX: -12

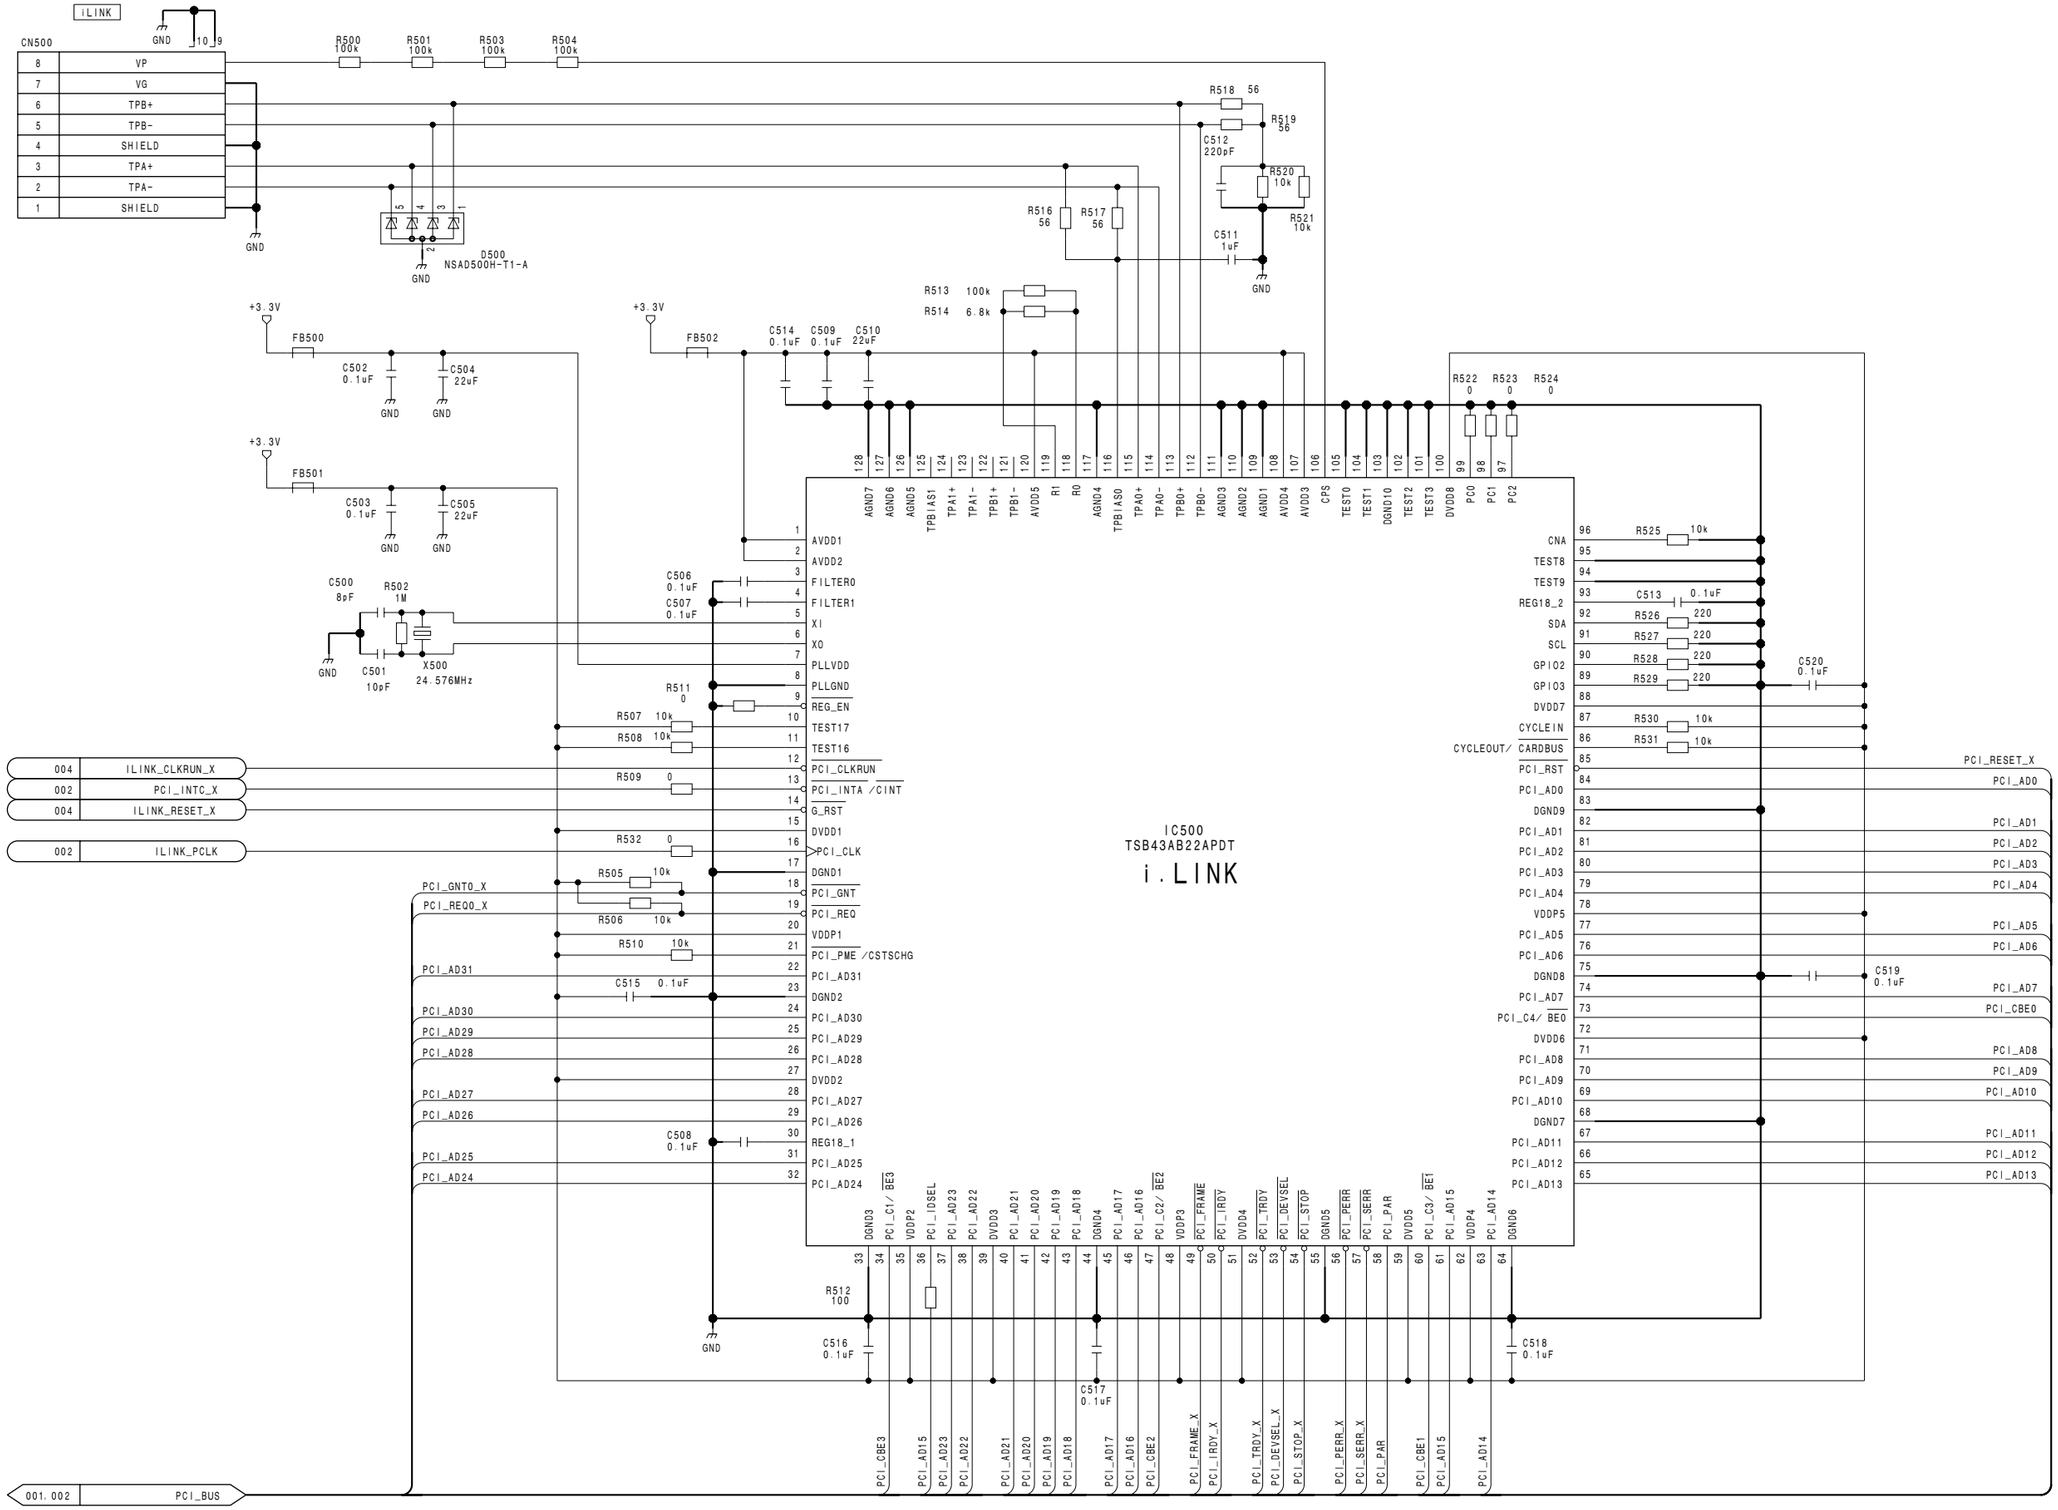

SY-322 (5/5)
BOARD NO. 1-869-662-12
PDW-F350_SY-322_12F_5

4-144

PDW-F330/V2 (J,E)

MB-1028 Board

CN1

1	GND
2	GND
3	GND
4	VF_VIDEO
5	VF_VIDEO_GND
6	VF_R-Y
7	VF_B-Y
8	VF_SYNC
9	REG+5V
10	PEAKING_CONT
11	GND
12	LD (VF)
13	SCL (VF)
14	SDA (VF)
15	SDA (I²C3V)
16	SCL (I²C3V)
17	UNREG+12V
18	UNREG+12V
19	UNREG+12V
20	UNREG+12V
21	UNREG+12V
22	UNREG+12V
23	REG3.3V
24	UNREG_GND
25	UNREG_GND
26	UNREG_GND
27	UNREG_GND
28	UNREG_GND
29	UNREG_GND
30	UNREG_GND

34 33 32 31

FL1 FL2 FL3 CT

R1 100k

RB1 100k RB2 100 RB3 100k RB4 100 RB5 100 RB6 100

+3.3V +12V

R29 0 NM L2 100uH

C3 0.1uF

IC1 PCA9555DB-118

VDD SDA A2 A1 A0 SCL INT VSS

I/O0.0 I/O0.1 I/O0.2 I/O0.3 I/O0.4 I/O0.5 I/O0.6 I/O0.7

I/O1.0 I/O1.1 I/O1.2 I/O1.3 I/O1.4 I/O1.5 I/O1.6 I/O1.7

C12 0.001uF C11 10pF C13 0.1uF

R18 100k R28 10k Q8 2SA1611T1-M5M6 R17 100 R19 100

R31 10k R32 10k

R30 0 NM L3 100uH

F-GND

C14 0.1uF C15 0.1uF C10 0.1uF

IC2 74VHCT245AMTCX

VCC GND T/R OE A0 A1 A2 A3 A4 A5 A6 A7 B0 B1 B2 B3 B4 B5 B6 B7

CN2

5600K_IND	1
GND	2
5600K_SW	3
LIGHT_ON_AUTO/MANU	4

LGT-12 Board

CN3

ASSIGN_3_SW	1
ASSIGN_4_SW	2
GND	3

SW-1249 Board

CN5

PEAKING_CONT_IN	1
EXT_DC_OUT	2
REC_TALLY_IND_OUT	3
BATT_IND_OUT	4
ZEBRA_SW_IN	5
VF_VIDEO (X) _OUT	6
EXT_DC_OUT	7
NC	8
NC	9
SDA (VF) OUT	10
VF_VIDEO (G) _OUT	11
EXT_DC_GND	12
NC	13
VF_DISP_ON/OF	14
SCL (VF) OUT	15
R-Y (VF) OUT	16
EXT_DC_GND	17
B-Y (VF) OUT	18
SYNC (VF) OUT	19
LD (VF) OUT	20

21 22 23 24

View Finder

CN6

1	LIGHT_12V
2	LIGHT_12V
3	LIGHT_GND
4	LIGHT_GND

CN7

LIGHT_12V	1
LIGHT_12V	2
LIGHT_GND	3
LIGHT_GND	4

GND 6 5 GND GND 5 6 GND

C19 10uF 16V C18 10uF 16V C17 1uF 16V C16 1uF 16V

F-GND

VF-87
BOARD NO. 1-869-494-11
PDW-F330K_VF-87_110_1

TG-249 (1/2)
SUFFIX: -11

4-146

TG-249 (1/2)
SUFFIX: -11

TG-249 (1/2)
SUFFIX: -11

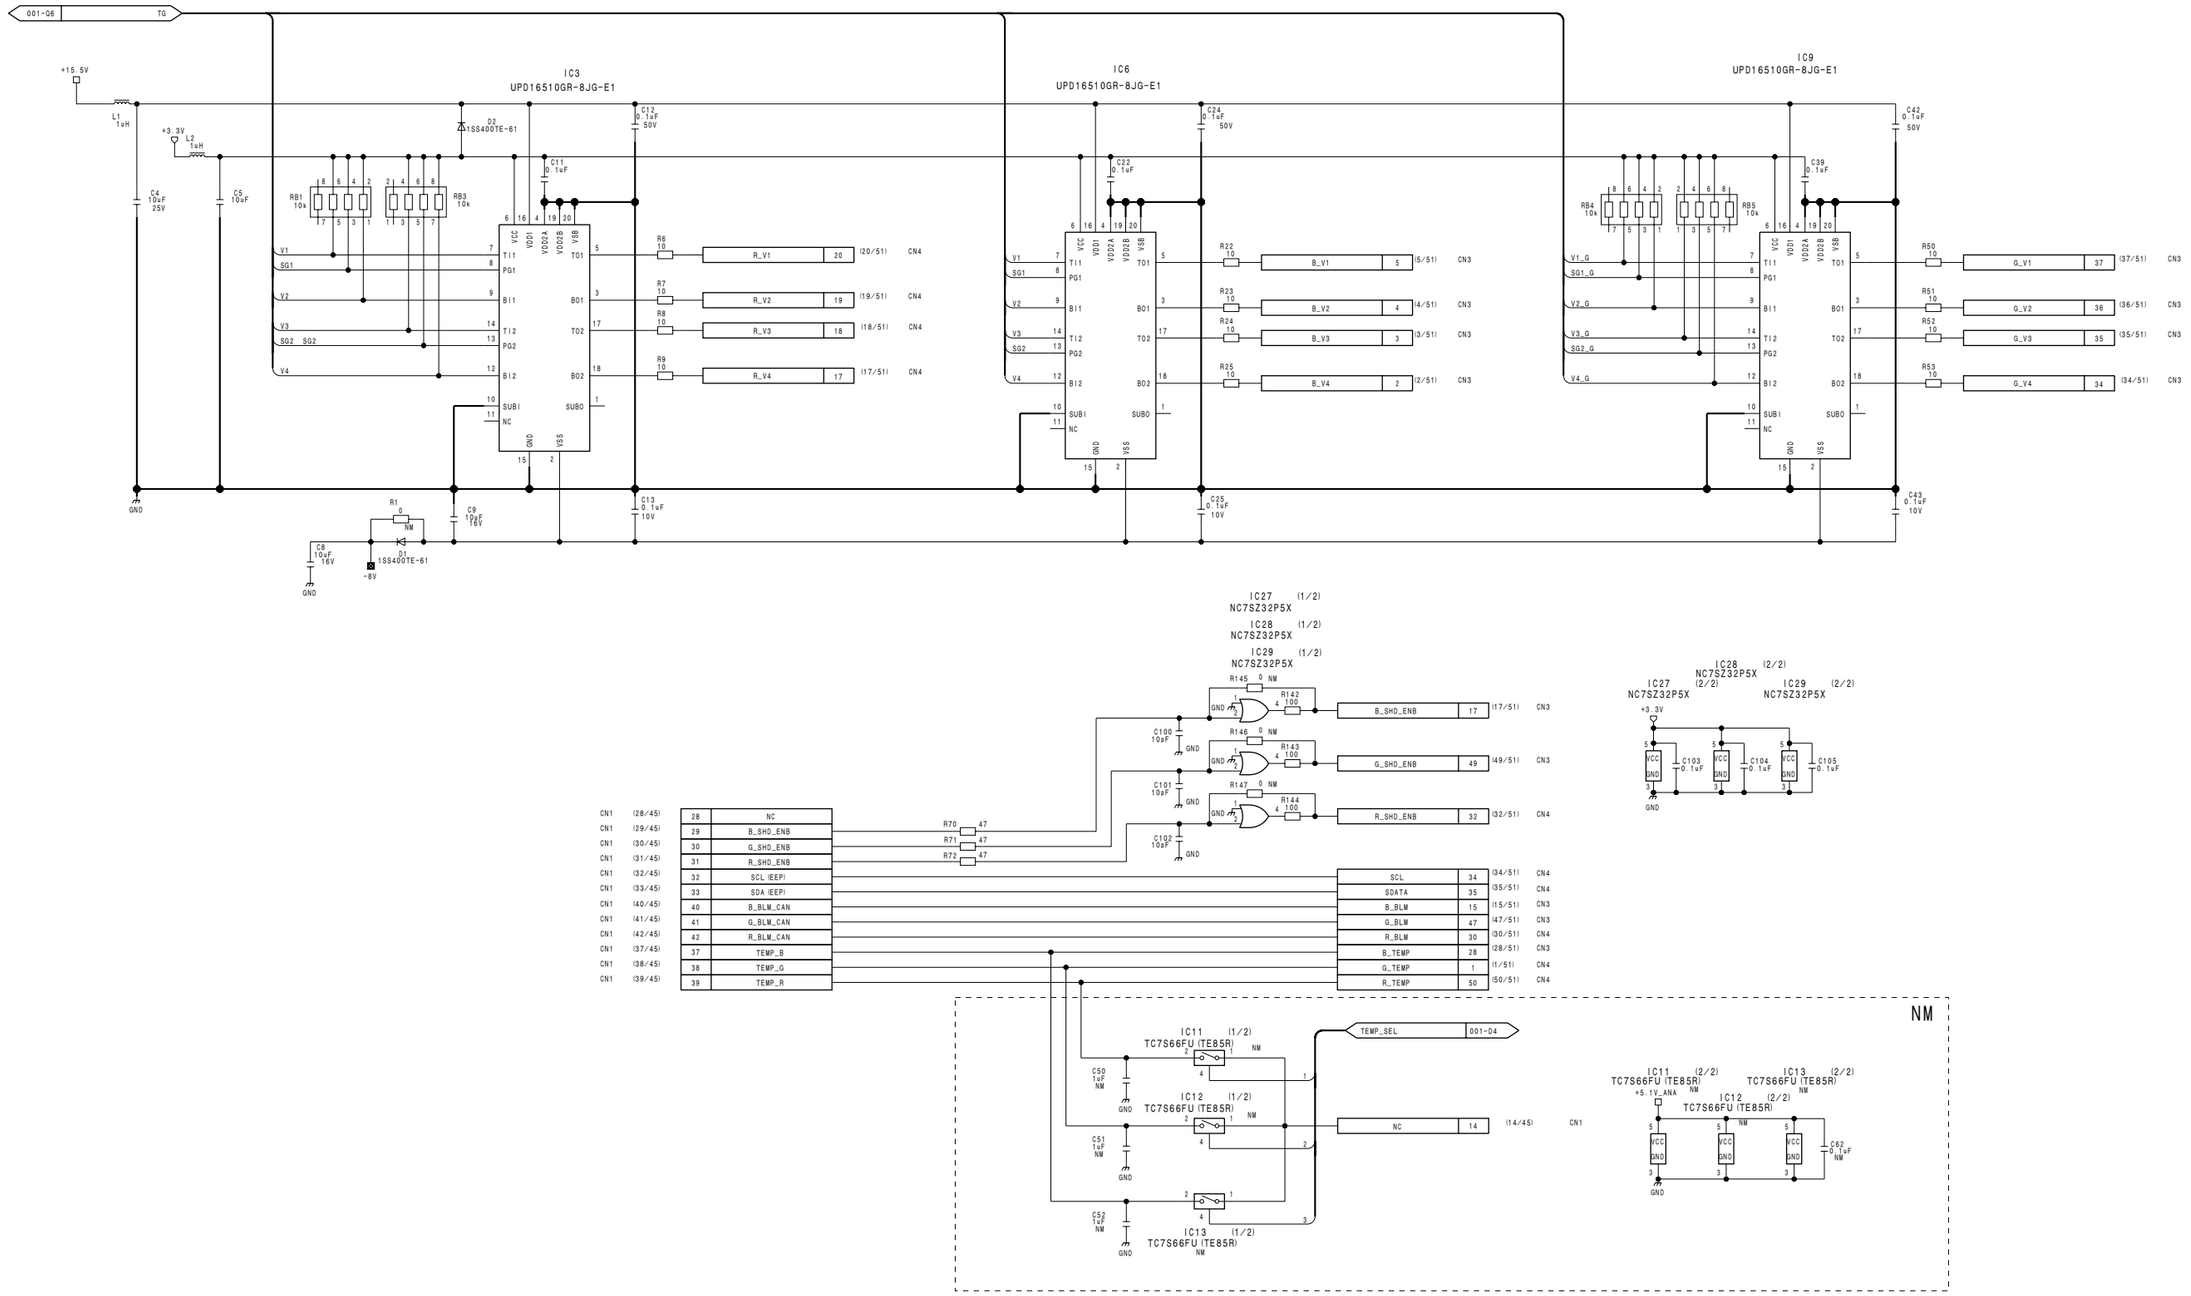

TG-249 (1/2)
BOARD NO. 1-869-513-11
PDW-F330K_TG-249_110_1

TG-249 (2/2)
SUFFIX: -11

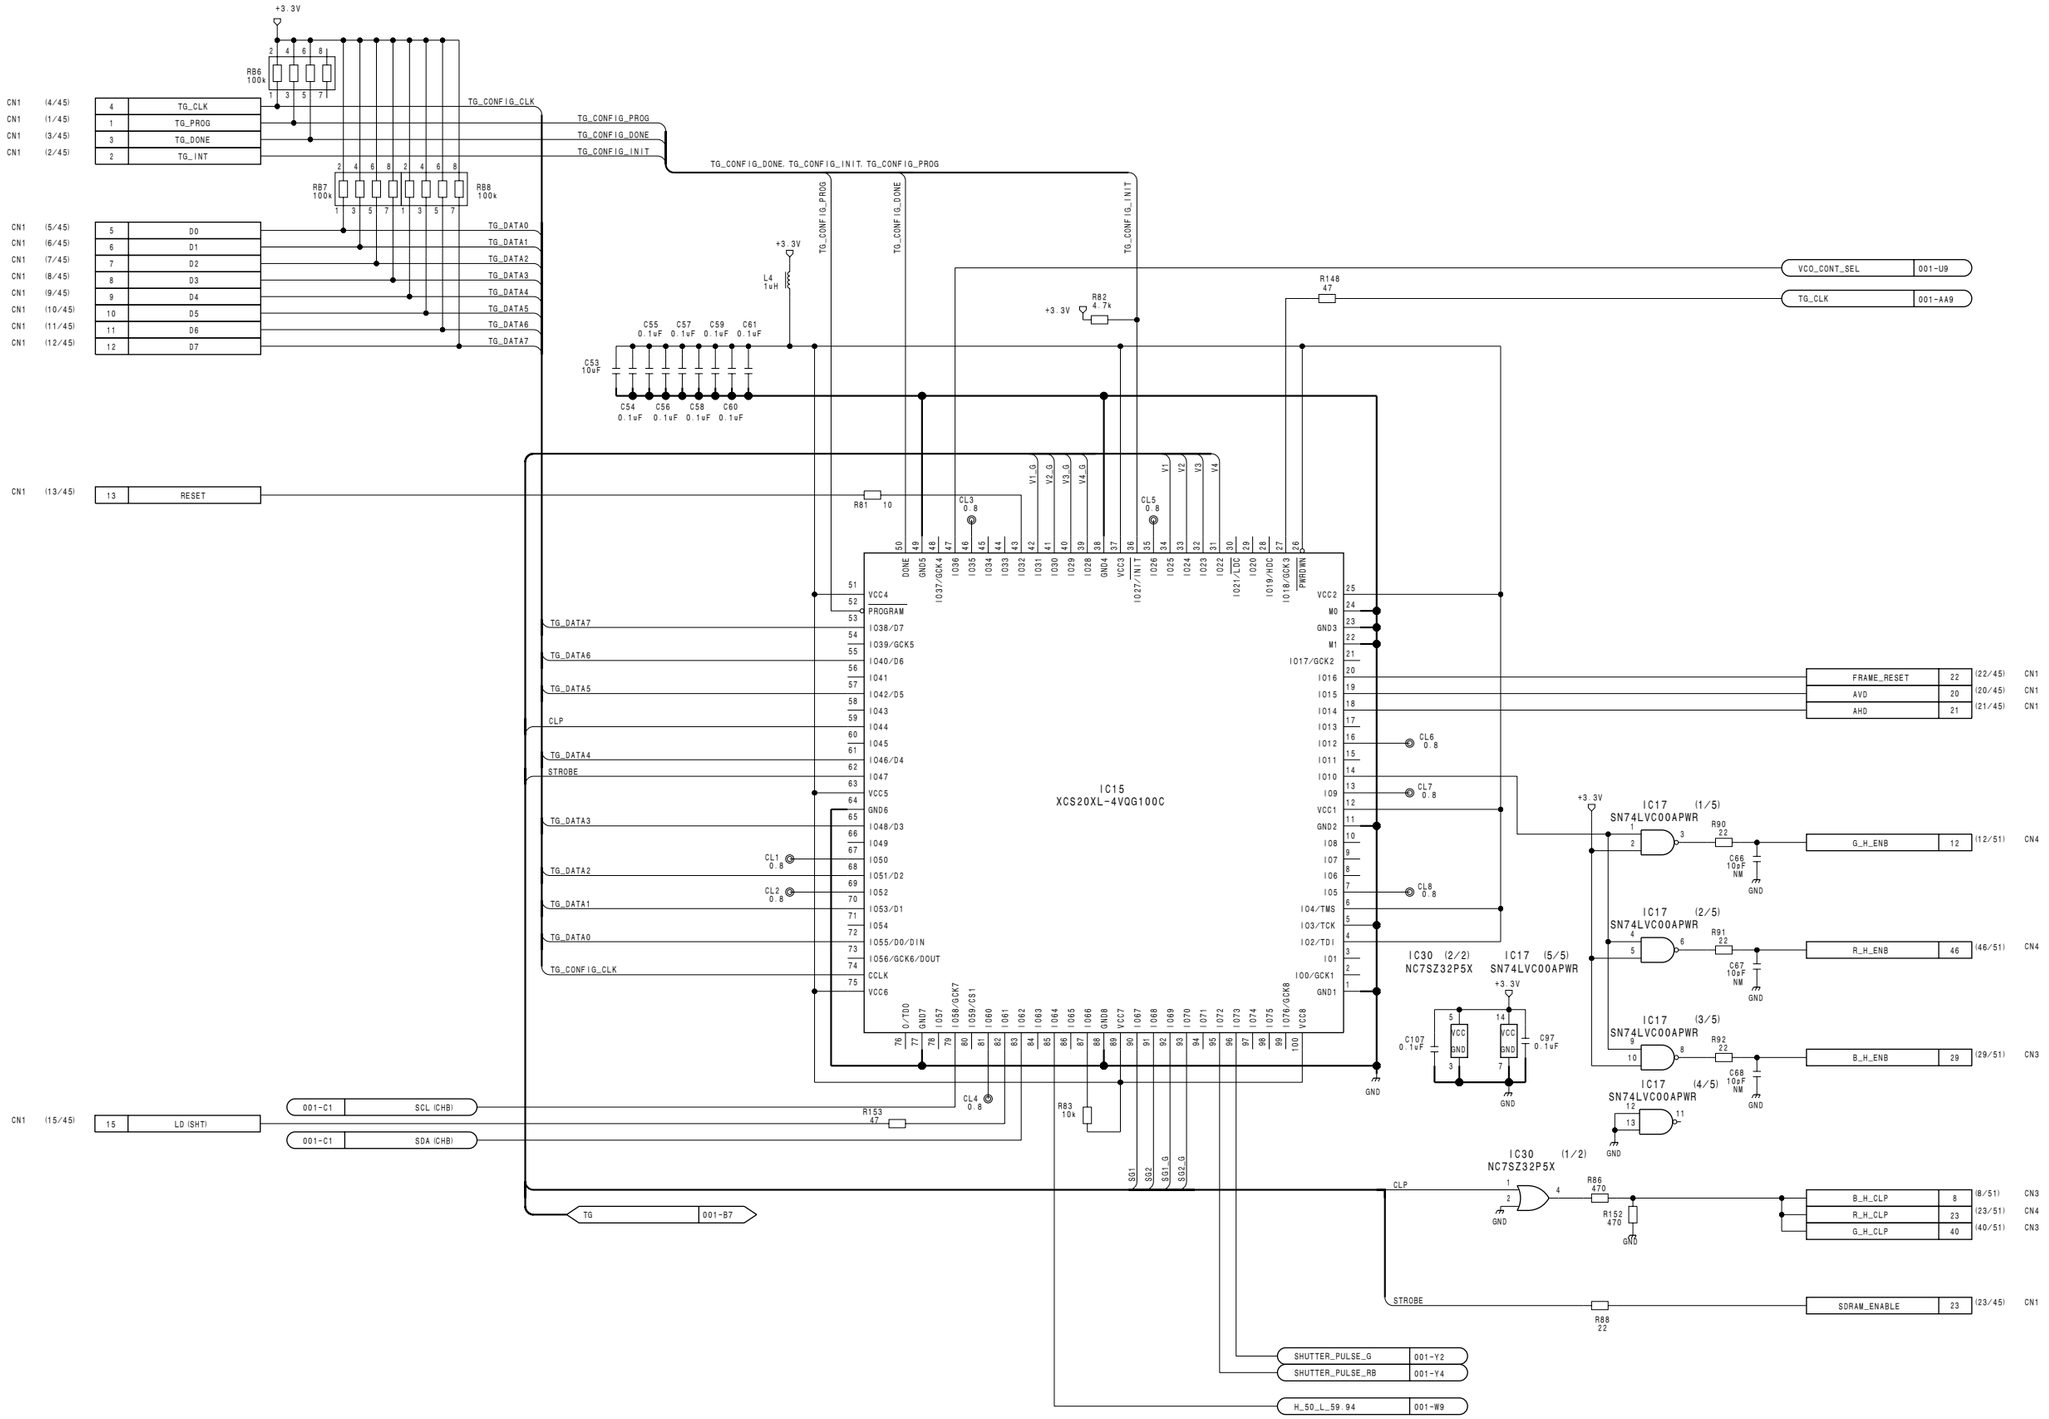

TG-249 (2/2)
SUFFIX: -11

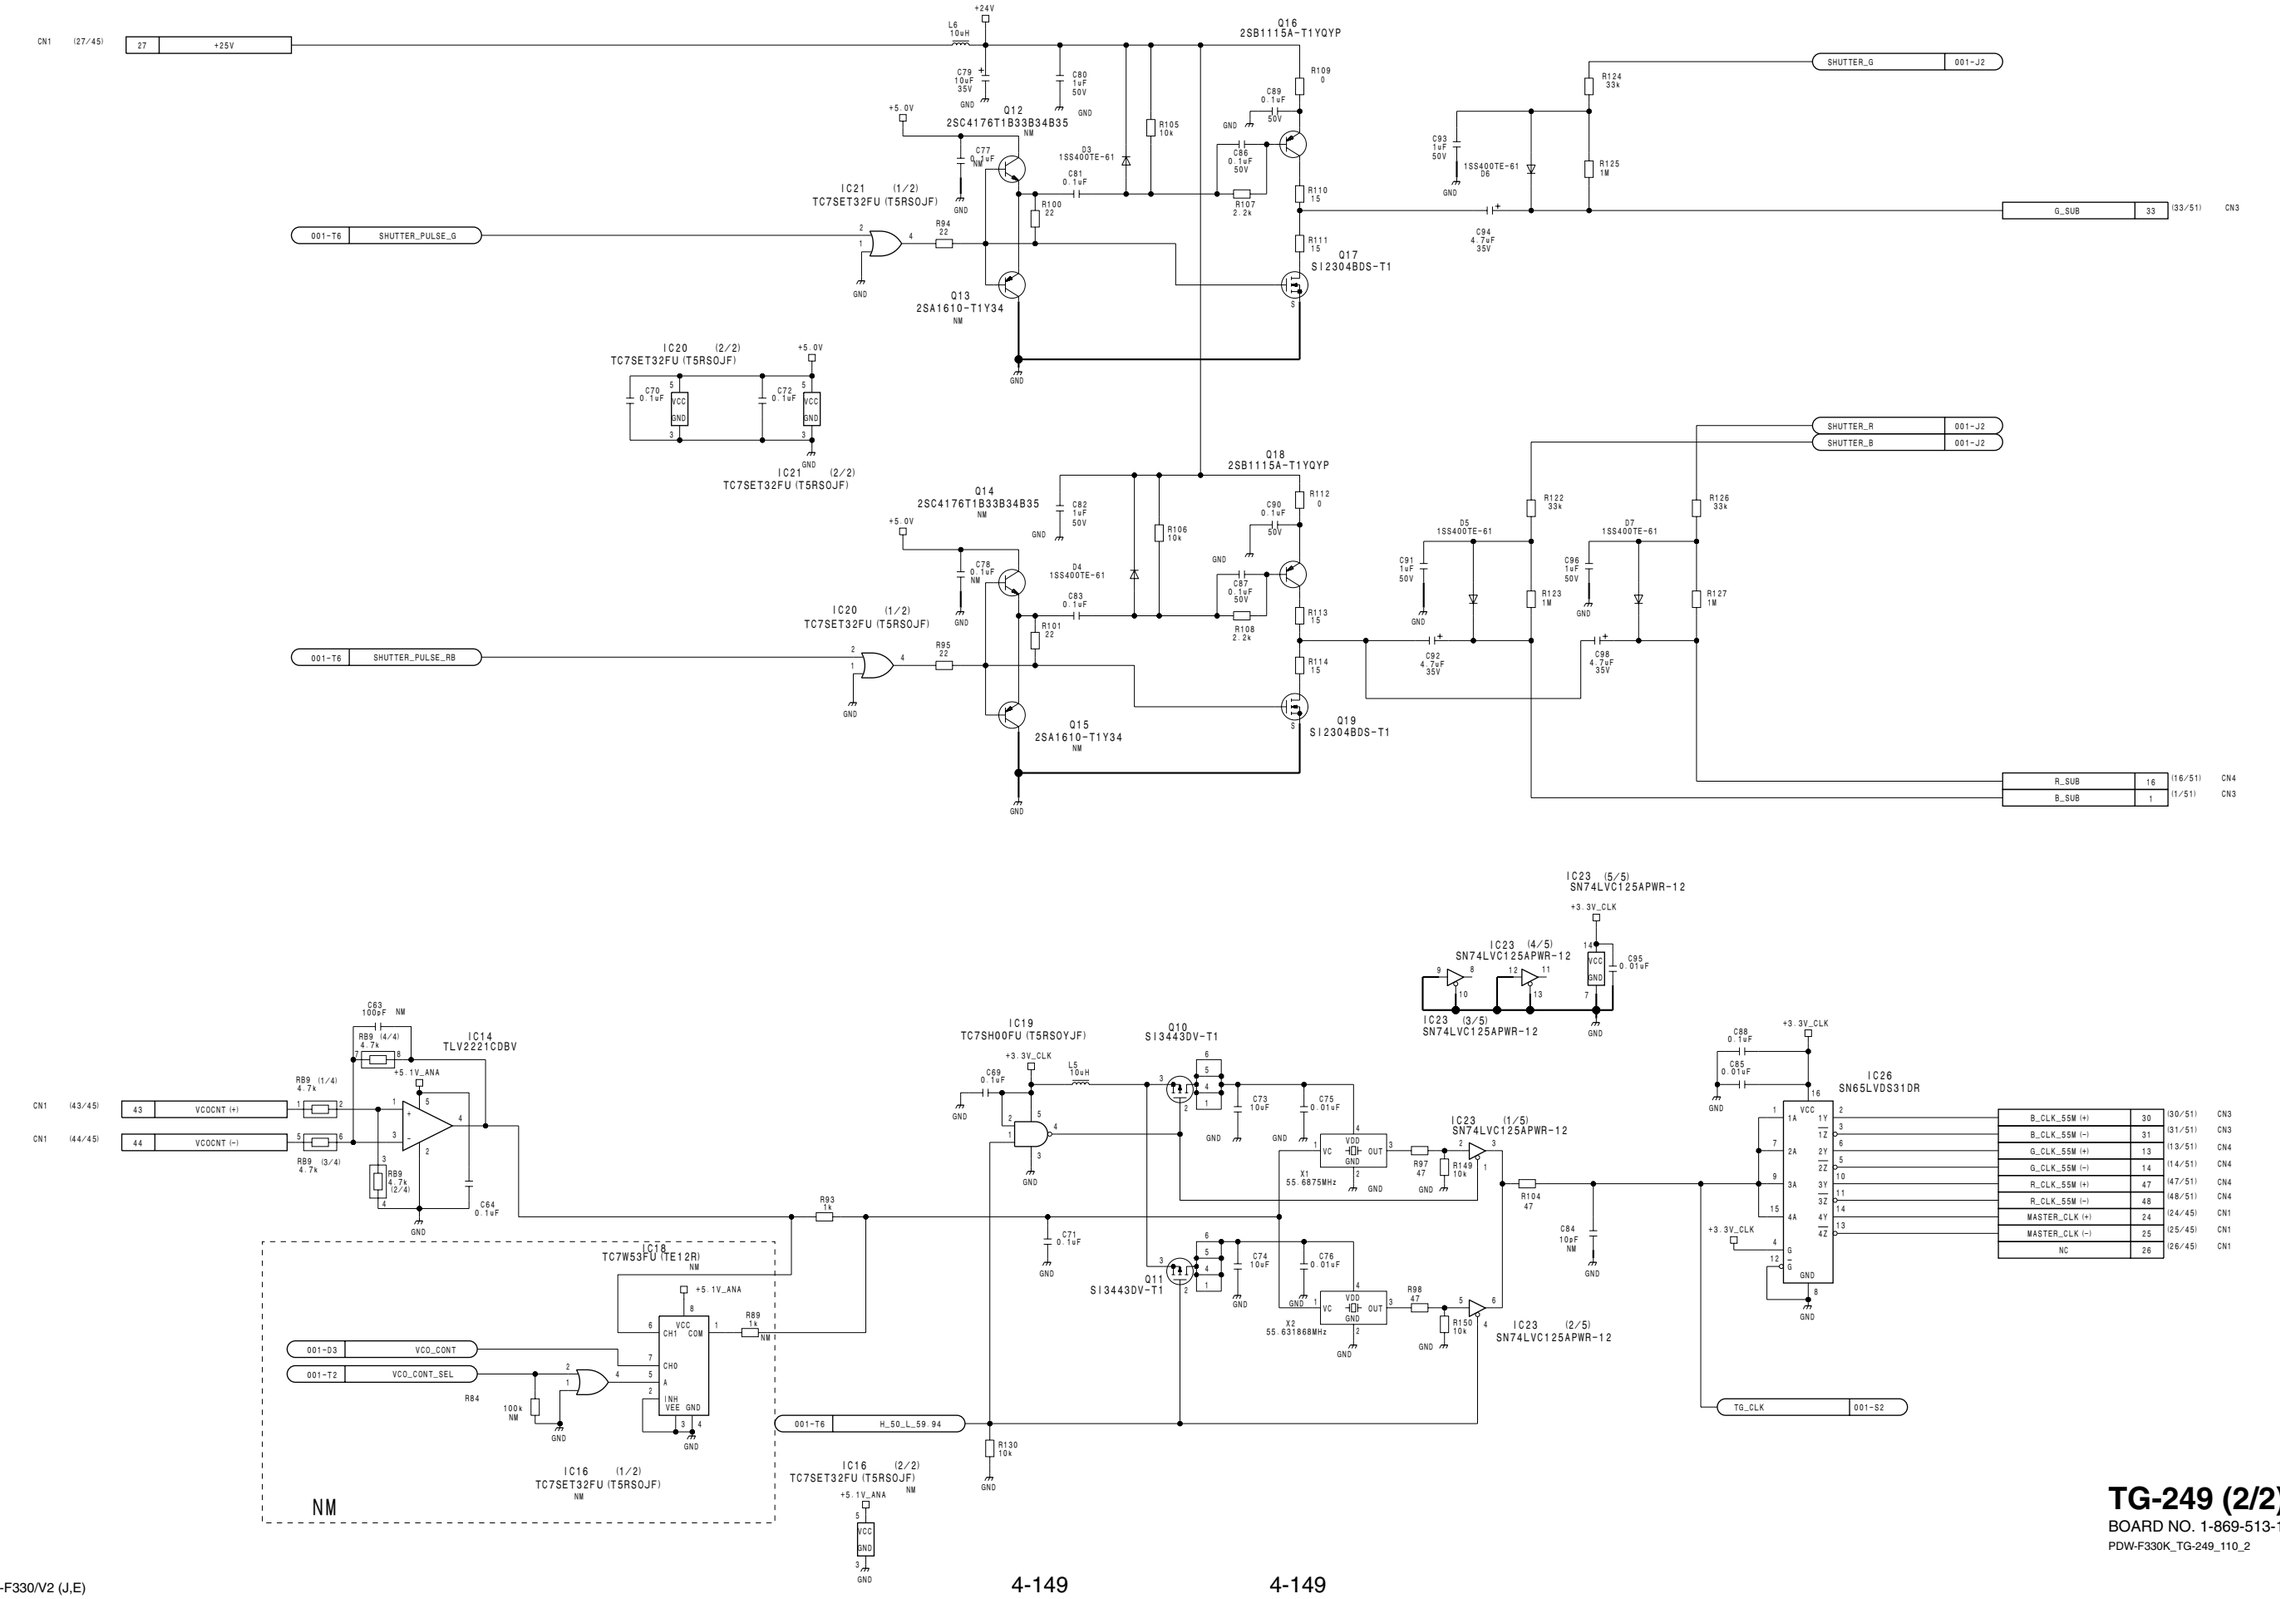

TG-249 (2/2)
BOARD NO. 1-869-513-11
PDW-F330K_TG-249_110_2

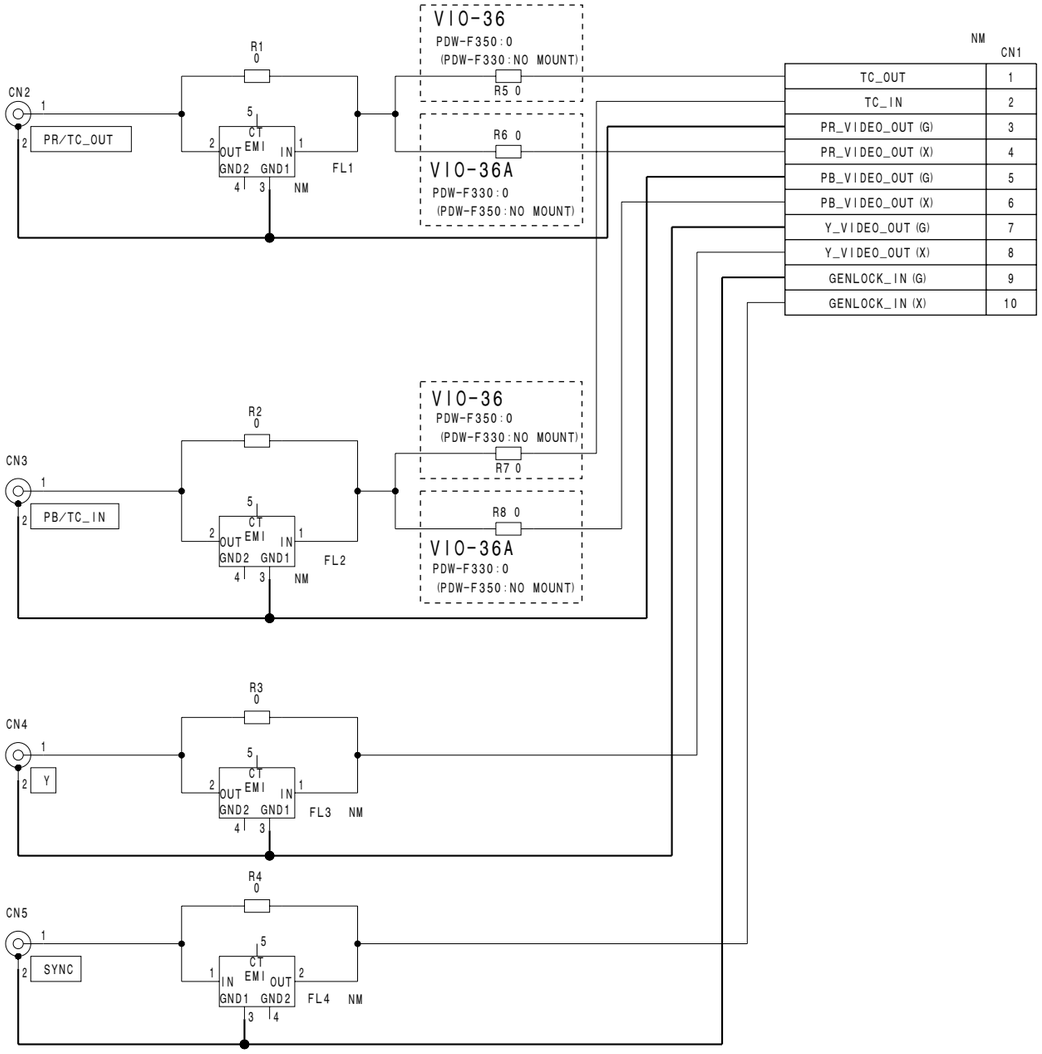

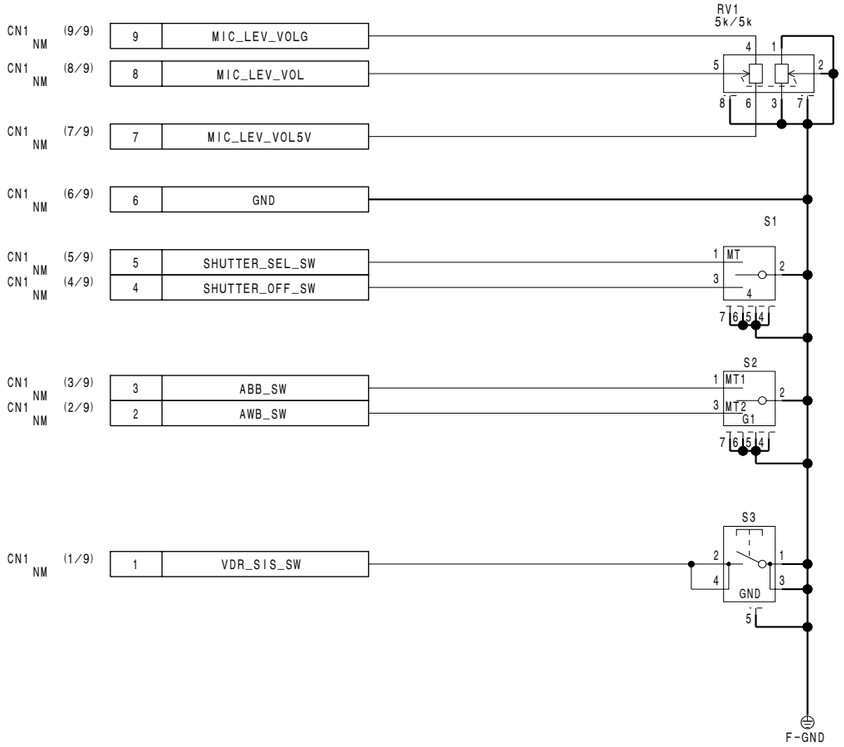

VIO-36
VIO-36A
BOARD NO. 1-869-495-11
PDW-F330K_VIO-36A_110_1

VR-312
BOARD NO. 1-869-508-11
PDW-F330K_VR-312_110_1

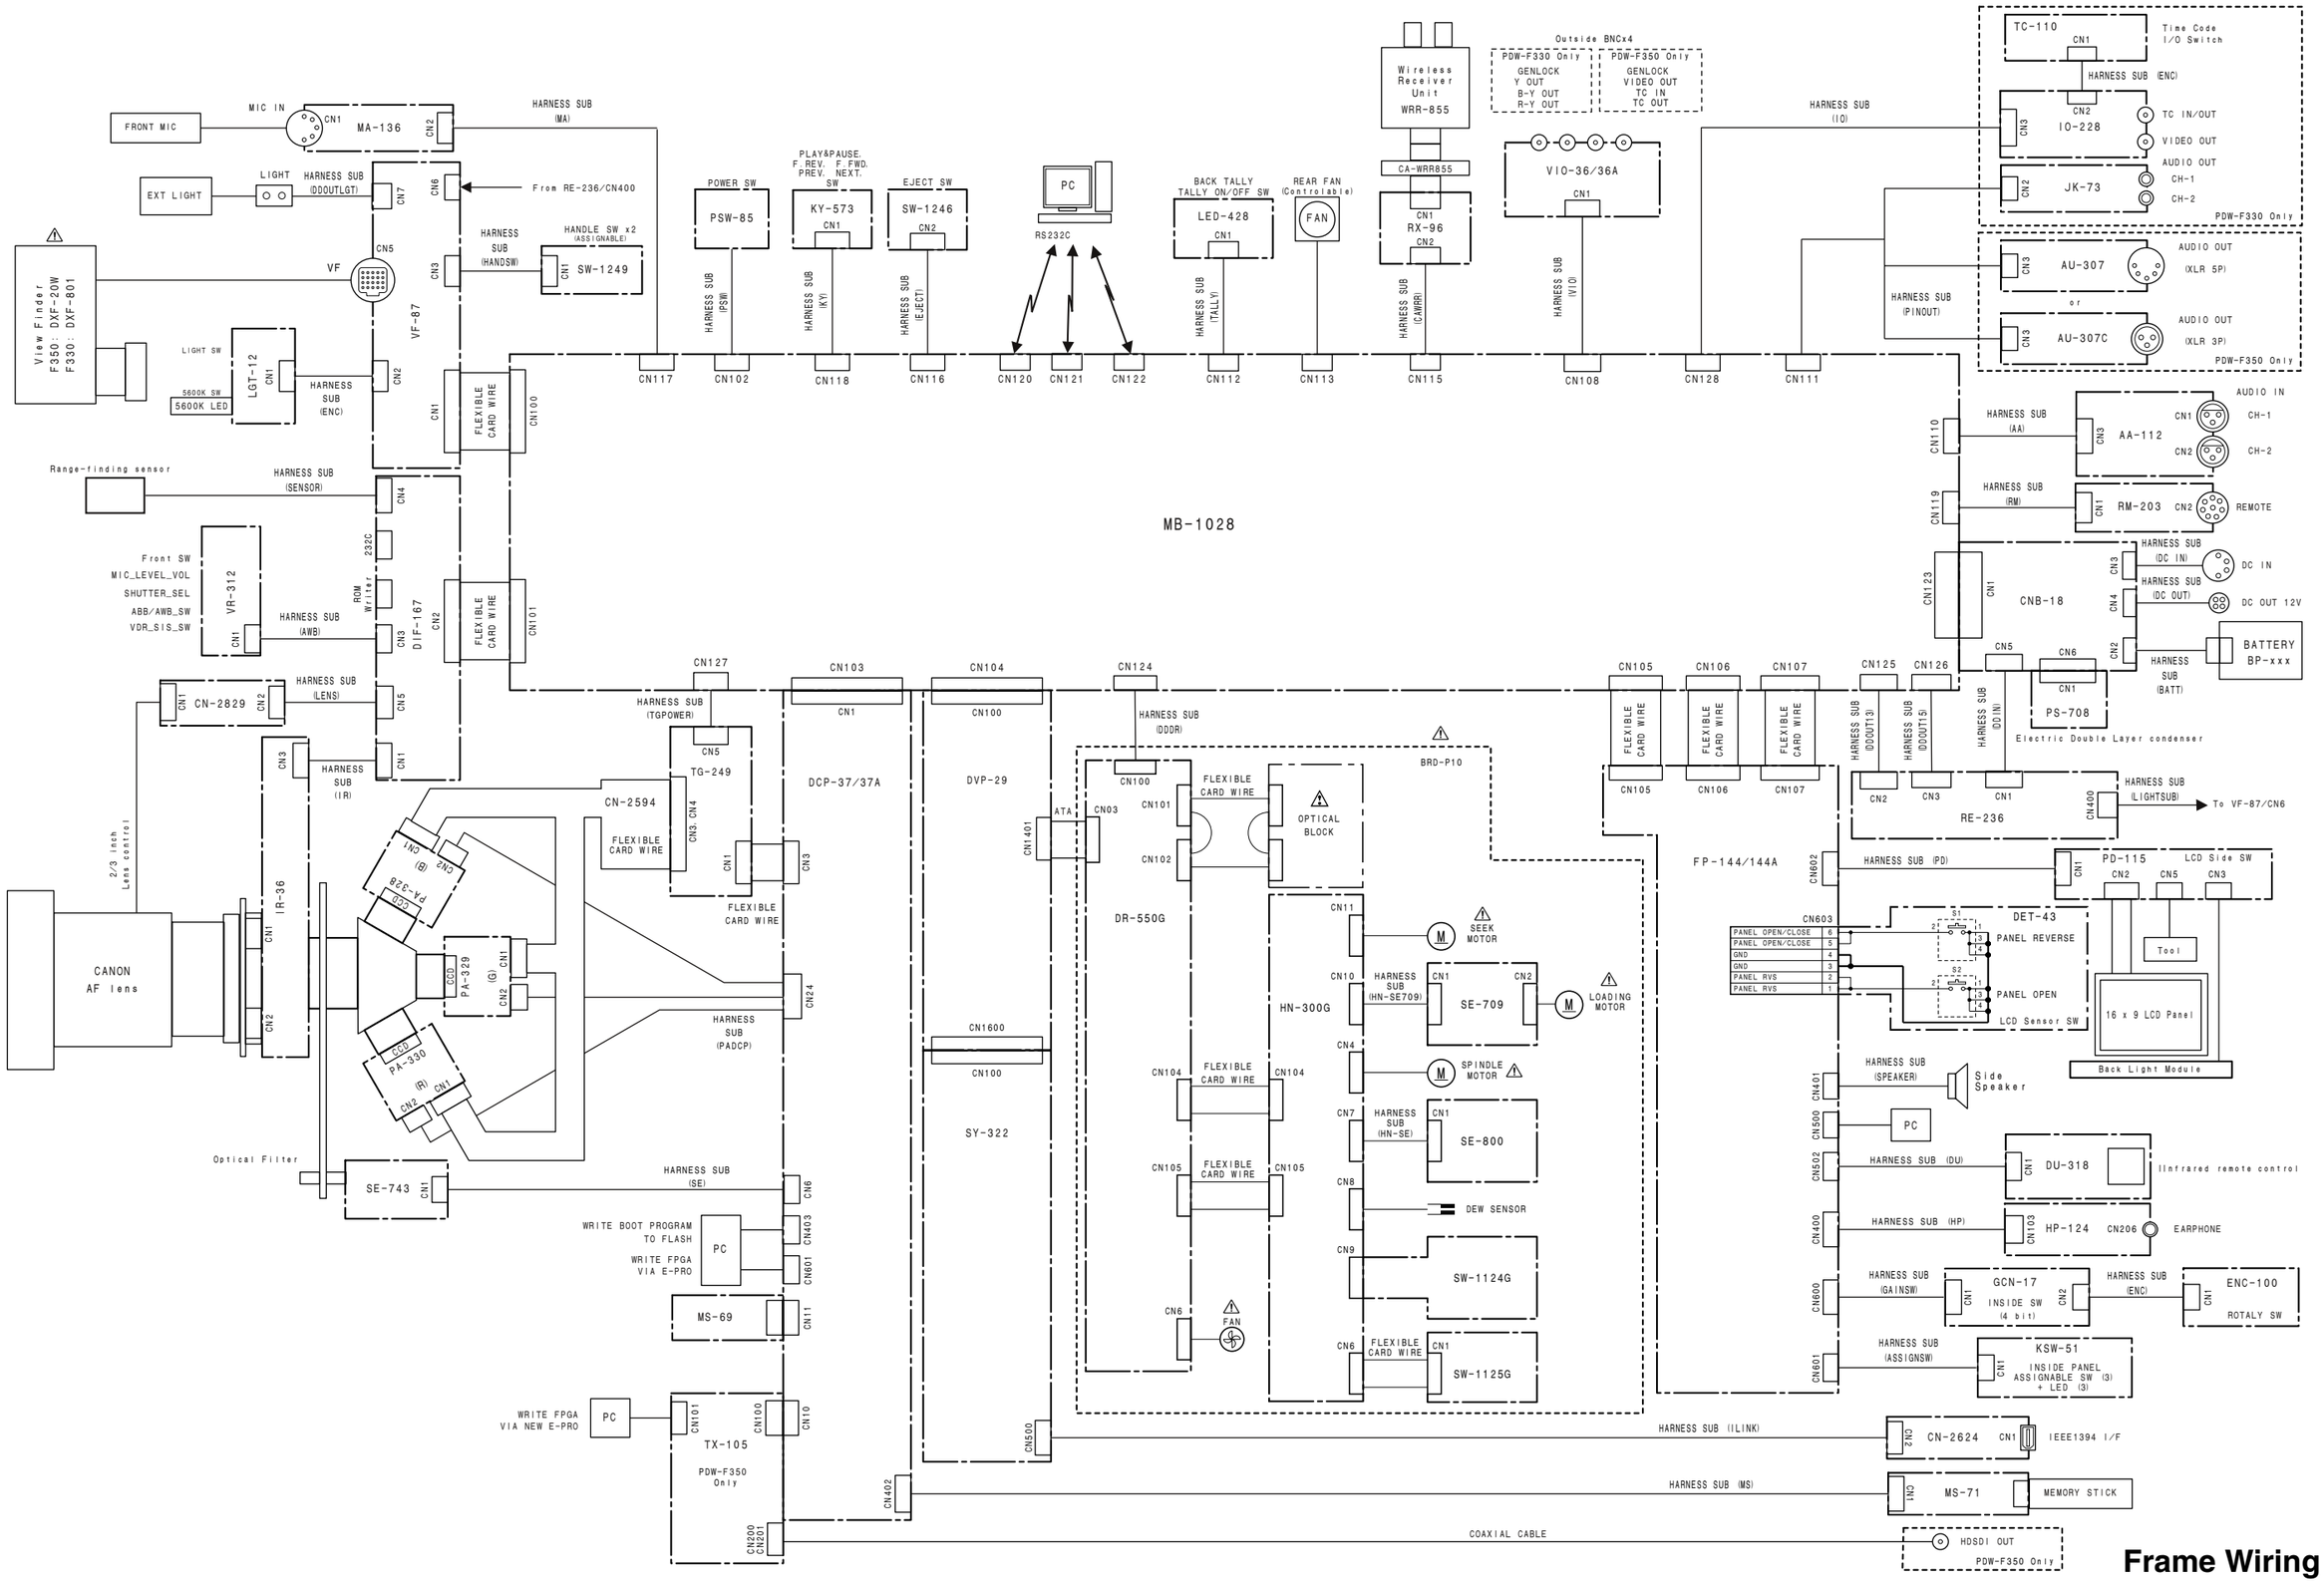
MB-1028
FRONT MIC
MIC IN
MA-136
HARNESS SUB (MA)
EXT LIGHT
LIGHT
HARNESS SUB (DDOUTLGT)
From RE-236/CN400
VF
VF-87
HARNESS SUB (HANDSW)
HANDLE SW x2 (ASSIGNABLE)
SW-1249
View Finder F350: DXF-20W F330: DXF-801
LIGHT SW
5600K SW
5600K LED
LGT-12
HARNESS SUB (ENC)
FLEXIBLE CARD WIRE
Range-finding sensor
HARNESS SUB (SENSOR)
Front SW
MIC_LEVEL_VOL
SHUTTER_SEL
ABB/AWB_SW
VDR_SIS_SW
VR-312
HARNESS SUB (AWB)
232C
ROM Writer
DIF-167
CN-2829
HARNESS SUB (LENS)
HARNESS SUB (IR)
IR-36
2/3 inch Lens control
CANON AF lens
Optical Filter
SE-743
HARNESS SUB (SE)
CN-2594
TG-249
HARNESS SUB (TGPOWER)
FLEXIBLE CARD WIRE
PA-328
PA-329
PA-330
CCD
HARNESS SUB (PADCP)
WRITE BOOT PROGRAM TO FLASH
WRITE FPGA VIA E-PRO
PC
MS-69
WRITE FPGA VIA NEW E-PRO
TX-105
PDW-F350 Only
DCP-37/37A
DVP-29
SY-322
HARNESS SUB (DDDR)
BRD-P10
OPTICAL BLOCK
DR-550G
HN-300G
SEEK MOTOR
LOADING MOTOR
SPINDLE MOTOR
SE-709
SE-800
DEW SENSOR
SW-1124G
SW-1125G
FAN
HARNESS SUB (HN-SE709)
HARNESS SUB (HN-SE)
POWER SW
PSW-85
PLAY&PAUSE, F.REV, F.FWD, PREV, NEXT, SW
KY-573
EJECT SW
SW-1246
RS232C
BACK TALLY TALLY ON/OFF SW
LED-428
REAR FAN (Controlable)
Wireless Receiver Unit WRR-855
CA-WRR855
RX-96
Outside BNCx4
PDW-F330 Only
GENLOCK Y OUT B-Y OUT R-Y OUT
PDW-F350 Only
GENLOCK VIDEO OUT TC IN TC OUT
VIO-36/36A
HARNESS SUB (VIO)
HARNESS SUB (IO)
HARNESS SUB (PINOUT)
TC-110
Time Code I/O Switch
HARNESS SUB (ENC)
IO-228
TC IN/OUT
VIDEO OUT
AUDIO OUT
JK-73
CH-1
CH-2
PDW-F330 Only
AU-307
AUDIO OUT
(XLR 5P)
or
AU-307C
(XLR 3P)
PDW-F350 Only
AUDIO IN
AA-112
HARNESS SUB (AA)
HARNESS SUB (RM)
RM-203
REMOTE
CNB-18
HARNESS SUB (DC IN)
DC IN
HARNESS SUB (DC OUT)
DC OUT 12V
BATTERY BP-xxx
HARNESS SUB (BATT)
PS-708
Electric Double Layer condenser
HARNESS SUB (DDIN)
HARNESS SUB (DDOUT13)
HARNESS SUB (DDOUT15)
RE-236
HARNESS SUB (LIGHTSUB)
To VF-87/CN6
FP-144/144A
HARNESS SUB (PD)
PD-115
LCD Side SW
DET-43
PANEL REVERSE
PANEL OPEN
LCD Sensor SW
Tool
16 x 9 LCD Panel
Back Light Module
Side Speaker
PC
DU-318
Infrared remote control
HP-124
EARPHONE
GCN-17
INSIDE SW (4 bit)
ENC-100
ROTALY SW
KSW-51
INSIDE PANEL ASSIGNABLE SW (3) + LED (3)
CN-2624
IEEE1394 I/F
MS-71
MEMORY STICK
HDSDI OUT
PDW-F350 Only
HARNESS SUB (ILINK)
HARNESS SUB (MS)
COAXIAL CABLE
CN117
CN102
CN118
CN116
CN120
CN121
CN122
CN112
CN113
CN115
CN108
CN128
CN111
CN110
CN119
CN123
CN127
CN103
CN104
CN124
CN105
CN106
CN107
CN125
CN126
CN1401
CN1600
CN500
CN402
CN200
CN201
CN24
CN602
CN603
CN401
CN502
CN400
CN600
CN601

Section 5
Board Layouts

Index

Board Name	Page
AA-112	5-2
AU-307	5-2
CN-2624	5-2
CN-2829	5-2
CNB-18	5-2
DCP-37A	5-3
DET-43G	5-5
DIF-167	5-5
DR-550G	5-6
DU-318	5-7
DU-398	5-7
DVP-29	5-7
ENC-100	5-7
FP-144A	5-9
GCN-17	5-10
HN-300G	5-11
HP-124	5-10
IO-228	5-10
JK-73	5-12
KSW-51	5-12
KY-573	5-12
LED-428	5-12
LGT-12	5-12
MA-136	5-12
MB-1028	5-13
MS-71	5-13
PD-115	5-14
PS-708	5-14
PSW-85	5-14
RE-236	5-15
RM-203	5-16
RX-96	5-16
SE-709	5-16
SE-743	5-16
SE-800	5-16
SW-1124	5-16
SW-1125G	5-16
SW-1246	5-16
SW-1249	5-16
SY-322	5-17

Board Name	Page
TC-110	5-16
TG-249	5-18
VF-87	5-18
VIO-36A	5-18
VR-312	5-18

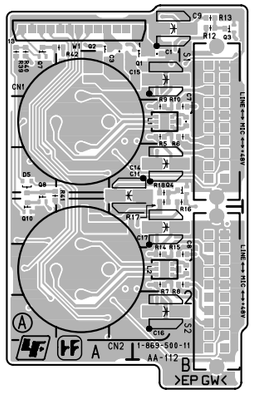

AA-112 -A SIDE-
SUFFIX: -11

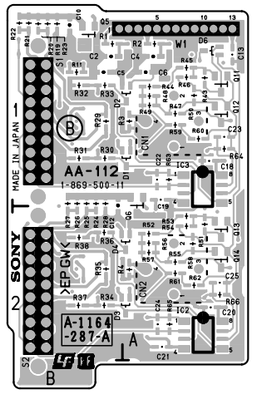

AA-112 -B SIDE-
SUFFIX: -11

AA-112 (1-869-500-11)
---

*:B SIDE

C1	B1	Q5	*B1	R38	*B2
C2	*B1	Q6	*A1	R39	A1
C3	A1	Q7	A1	R40	A1
C4	*A1	Q8	A1	R41	A1
C5	*B1	Q10	A2	R42	A1
C6	*A1	Q11	*A1	R43	*A1
C7	B1	Q12	*A1	R44	*A1
C8	B2	Q13	*A2	R45	*A1
C9	B1	Q14	*A2	R46	*A1
C10	*B1			R47	*A1
C11	A1	R1	*B1	R48	*A1
C12	*B1	R2	*A1	R49	*A1
C13	*A1	R3	*A1	R50	*A1
C14	B1	R4	*A2	R51	*A2
C15	B1	R5	B1	R52	*A2
C16	B2	R6	B1	R53	*A2
C17	B2	R7	B2	R54	*A2
C18	*A1	R8	B2	R55	*A2
C19	*A1	R9	B1	R56	*A2
C20	*A2	R10	B1	R57	*A2
C21	*A2	R11	*B1	R58	*A2
C22	*A1	R12	B1	R59	*A1
C23	*A1	R13	B1	R60	*A1
C24	*A2	R14	B2	R61	*A2
C25	*A2	R15	B2	R62	*A2
		R16	B1	R63	*A1
CN1	A1	R17	B1	R64	*A1
CN2	A2	R18	B1	R65	*A2
CN3	A1	R19	*B1	R66	*A2
		R20	*B1		
D1	*A1	R21	*B1	S1	B1
D2	*A1	R22	*B1	S2	B2
D3	*A2	R23	*B1		
D4	*A2	R24	*B1		
D5	A1	R25	*B1		
D6	*A1	R26	*B1		
		R27	*B1		
IC2	*A2	R28	*B1		
IC3	*A1	R29	*B1		
		R30	*B1		
L1	B1	R31	*B1		
L2	B2	R32	*B1		
		R33	*B1		
Q1	B1	R34	*B2		
Q2	A1	R35	*B2		
Q3	B1	R36	*B2		
Q4	B1	R37	*B2		



AU-307 -A SIDE-
SUFFIX: -11



AU-307 -B SIDE-
SUFFIX: -11



CN-2624 -A SIDE-
SUFFIX: -11



CN-2624 -B SIDE-
SUFFIX: -11



CN-2829 -A SIDE-
SUFFIX: -11



CN-2829 -B SIDE-
SUFFIX: -11

AA-112, AU-307, CN-2624, CN-2829, CNB-18

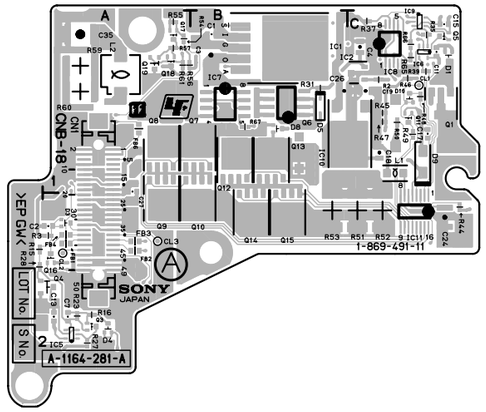

CNB-18 -A SIDE-
SUFFIX: -11

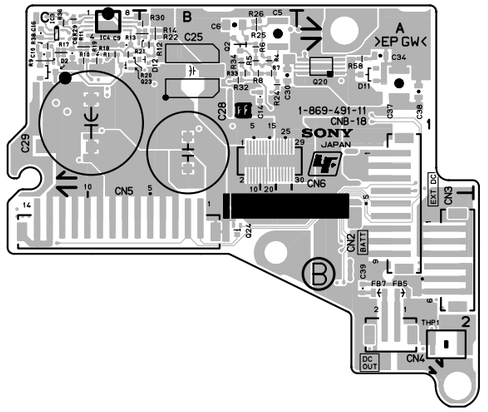

CNB-18 -B SIDE-
SUFFIX: -11

CNB-18 (1-869-491-11)
---

*:B SIDE

C1	A1	FB4	A2	R12	*A1
C2	A2	FB5	*A2	R13	*B1
C3	A1	FB6	A1	R14	*A1
C4	B1	FB7	*A2	R15	A2
C5	*A1			R16	A2
C6	*A1	IC1	A1	R17	*B1
C7	A2	IC2	B1	R18	*B1
C8	*B1	IC3	*B1	R19	*B1
C9	*B1	IC4	*B1	R20	*B1
C10	*B1	IC5	A2	R21	*A1
C11	B1	IC6	B1	R22	*A1
C13	A2	IC7	A1	R23	A2
C14	*A1	IC8	B1	R24	*A1
C15	B1	IC9	B1	R25	*A1
C16	*B1	IC10	B1	R26	*A1
C17	B1	IC11	B2	R27	A2
C18	B1			R28	A2
C19	B1	L1	B1	R29	*B1
C24	B2	L2	A1	R30	*A1
C25	*A1			R31	A1
C26	A1	Q1	B1	R32	*A1
C27	A1	Q2	*A1	R33	*A1
C28	*A1	Q3	A2	R34	*A1
C29	*B1	Q4	A2	R35	B1
C30	*A1	Q5	B1	R36	*B1
C34	*A1	Q6	A1	R37	B1
C35	A1	Q7	A1	R38	*B1
C37	*A1	Q8	A1	R39	B1
C38	*A1	Q9	A2	R44	B2
C39	*A2	Q10	A2	R45	B1
CL1	B1	Q11	B1	R46	B1
CL2	A2	Q12	A1	R47	B1
CL3	A2	Q13	A1	R48	B1
CN1	A2	Q14	A2	R49	B1
CN2	*A2	Q15	A2	R50	B1
CN3	*A2	Q16	A2	R51	B2
CN4	*A2	Q17	A1	R52	B2
CN5	*B2	Q18	A1	R53	A2
CN6	*A1	Q19	A1	R54	A1
		Q20	*A1	R55	A1
D1	B1	Q23	*B1	R56	A1
D2	*B1	Q24	*A2	R57	A1
D3	A2			R58	*A1
D4	A2	R1	*B1	R59	A1
D5	A1	R2	B1	R60	A1
D8	A1	R3	A2	R61	A1
D9	B1	R4	*A1	R65	B1
D10	B1	R5	*A1	R66	B1
D11	*A1	R6	*A1	R67	A1
D12	*A1	R7	*A1		
		R8	*A1	THP1	*A2
FB1	A2	R9	*B1		
FB2	A2	R10	*B1		
FB3	A2	R11	*B1		

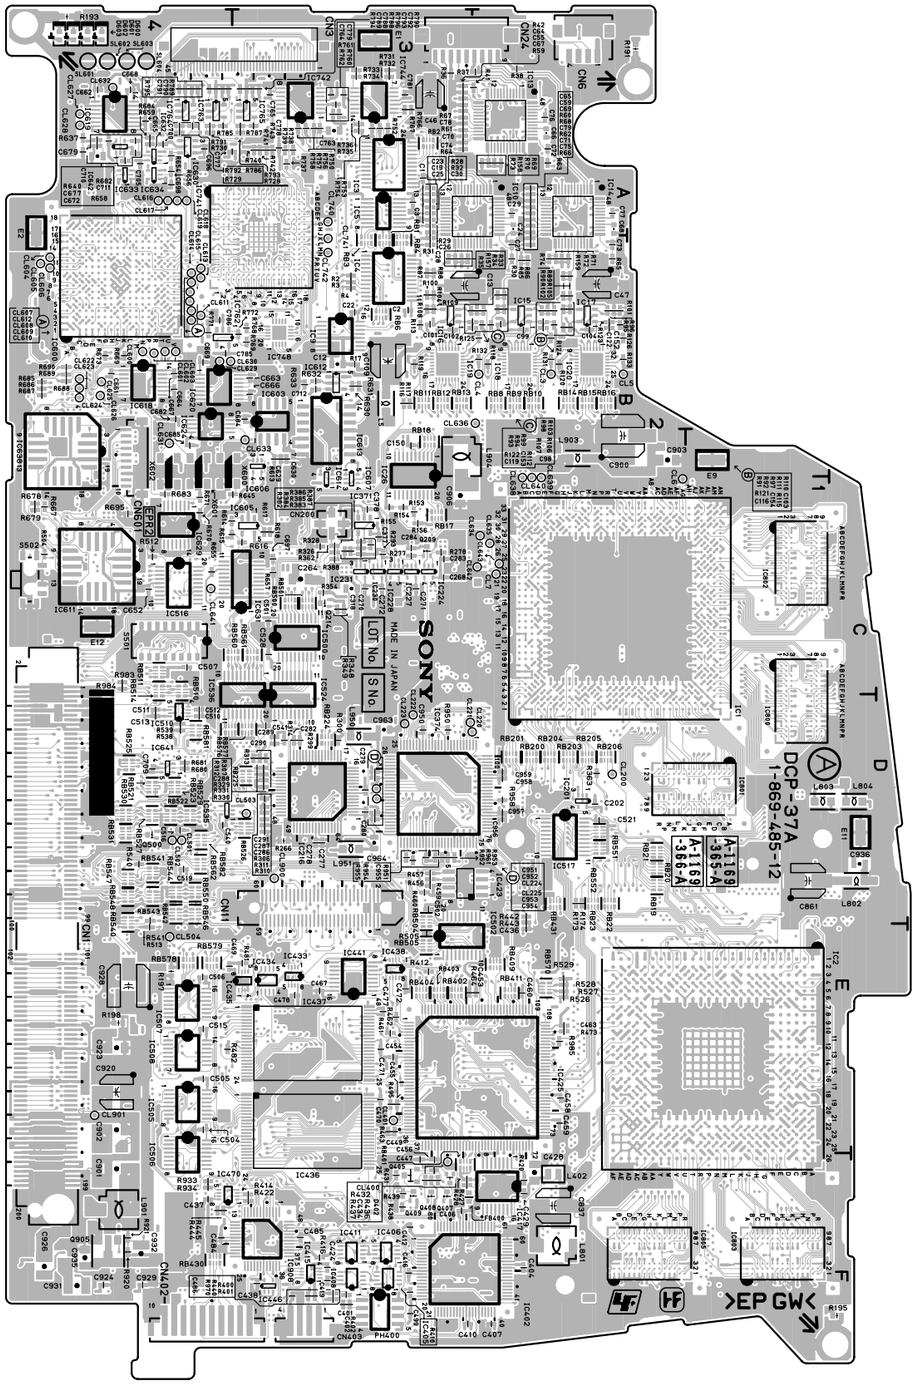

Components location list ; next page

DCP-37A -A SIDE-
SUFFIX: -12

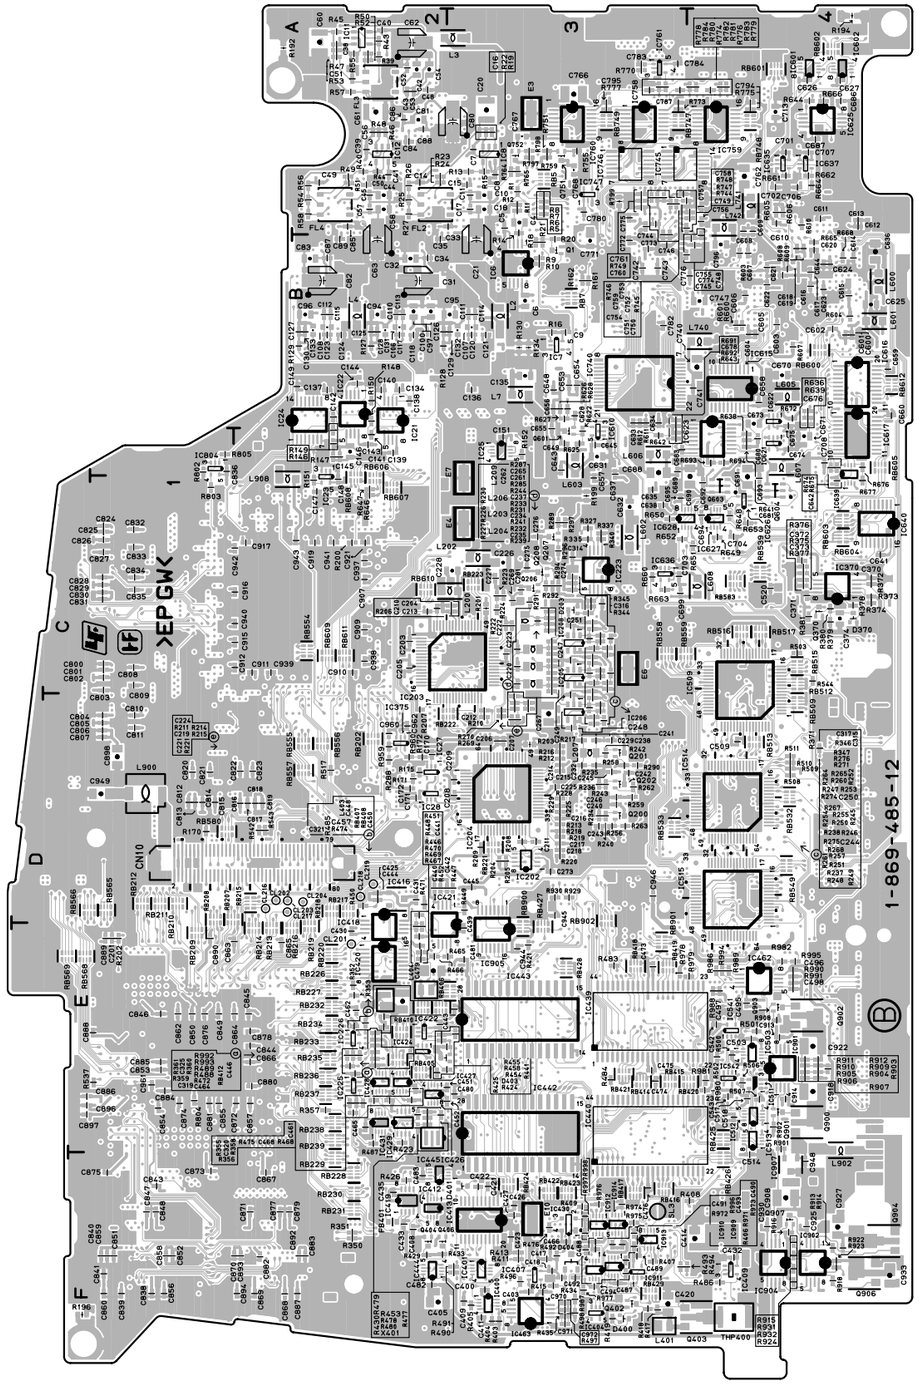

DCP-37A -B SIDE-
SUFFIX: -12

DCP-37A (1-869-485-12)
---

*:B SIDE

C1	A3	C98	B2	C237	*C3	C435	*F2	C601	*B4	C698	A4	C820	*D1	C917	*C2	CL615	B4	IC19	B3	IC517	D2	L207	*D3	R27	*A2	R129	*B2	R254	*C3	R401	F3	R492	*F3
C2	B3	C99	B2	C238	*D3	C436	E2	C602	*B4	C699	*C3	C821	*D1	C918	*E4	CL616	A4	IC20	B2	IC524	D3	L209	*C3	R28	A3	R130	*B3	R255	*C3	R402	F3	R493	*F3
C3	A3	C100	*B2	C240	*D3	C437	F4	C603	*B4	C700	A4	C822	*D2	C919	*C2	CL617	A4	IC21	*B2	IC535	D4	L401	*F3	R29	A3	R131	B2	R256	*D3	R403	*F3	R494	*F4
C4	*A3	C101	B3	C241	*D3	C438	F3	C604	*B4	C701	*A4	C823	*D2	C920	E4	CL618	A4	IC22	*B2	IC536	C3	L402	F2	R30	B2	R132	B2	R257	*D3	R404	*F3	R495	E3
C5	*A3	C102	B3	C242	*D3	C439	*E3	C605	*B4	C702	*A4	C824	*C1	C921	*C2	CL619	A4	IC23	*C2	IC541	*E4	L403	*E2	R31	B3	R133	B2	R258	*D3	R405	*F3	R496	*F3
C6	*B3	C103	B2	C243	*D3	C440	*D2	C606	*B4	C703	*C3	C825	*C1	C922	*E4	CL622	B4	IC24	*B2	IC542	*E4	L404	*E2	R32	A3	R134	*B3	R259	*D3	R406	*F3	R497	*F3
C7	*A3	C104	B2	C244	*C3	C441	*E2	C607	*B4	C704	*C4	C826	*C1	C923	E4	CL623	B4	IC25	*B3	IC600	B4	L600	*B4	R33	B3	R146	*B2	R260	*C3	R407	*F3	R498	*F3
C8	*A3	C106	*B2	C245	*D3	C442	*D3	C608	*A4	C705	A4	C827	*C1	C924	F4	CL624	B4	IC26	B3	IC601	*A4	L601	*B4	R34	B3	R147	*B2	R261	*D3	R408	*F4	R500	*E4
C9	*B3	C107	*B3	C246	*D3	C443	*E2	C609	*A4	C706	*A4	C828	*C1	C925	*F4	CL625	B4	IC27	*D2	IC602	*A4	L602	*C3	R35	B3	R148	*B2	R262	*D3	R409	*F3	R501	*E4
C10	*A3	C108	*B2	C247	*C3	C444	*D2	C610	*A4	C707	*A4	C829	*C1	C926	F4	CL626	B4	IC28	*D2	IC603	B3	L603	*B3	R36	A3	R149	*B2	R263	*D3	R410	F3	R502	*E4
C11	*A3	C109	B3	C248	*D3	C445	*D3	C611	*A4	C708	*B4	C830	*C1	C927	*F4	CL627	A4	IC201	D2	IC605	C3	L605	*B4	R37	A2	R150	*B2	R264	*C3	R411	*F3	R503	*C4
C12	B3	C110	*B2	C249	*D3	C446	*E2	C612	*A4	C709	D4	C831	*C1	C928	E4	CL628	A4	IC202	*D3	IC606	B3	L606	*B3	R38	A2	R151	*C2	R265	*C3	R412	E3	R504	C4
C13	B3	C111	*B3	C250	*C3	C447	F3	C613	*A4	C710	A4	C832	*C1	C929	F4	CL629	B4	IC203	*C3	IC607	C3	L607	*B4	R39	*A2	R152	*B3	R266	D3	R413	*F3	R505	E3
C14	*A2	C112	*B2	C251	*C3	C448	*E2	C614	*B4	C711	A4	C833	*C1	C930	*F4	CL630	B4	IC204	*D3	IC610	*B3	L608	*C4	R40	*A2	R153	C3	R267	*C3	R414	F3	R506	*E4
C15	*A3	C113	*B2	C261	*C3	C449	E3	C615	*B4	C712	B3	C834	*C1	C931	F4	CL631	B4	IC205	*C3	IC611	C4	L740	*B4	R41	A2	R154	C3	R268	*D3	R415	*F3	R507	*E4
C16	*A3	C114	*B3	C262	*C3	C450	*E3	C616	*B4	C713	*A4	C835	*C1	C932	F4	CL632	A4	IC206	*D3	IC612	B3	L741	*A4	R42	A3	R155	C3	R269	*D3	R416	F3	R508	*D4
C17	*A3	C115	*B2	C264	C3	C451	*E3	C617	*B4	C740	*B4	C836	*B1	C933	*F4	CL633	B3	IC208	*C3	IC613	B3	L742	*A4	R43	*A2	R156	C3	R270	*D3	R417	*F3	R509	*D4
C18	*A3	C116	B2	C265	*C3	C452	*E3	C618	*B4	C741	*B4	C837	F2	C935	F4	CL634	C2	IC216	D3	IC614	C3	L801	F2	R44	*A2	R157	B3	R271	*C3	R418	*F3	R510	*D4
C19	A3	C117	*B2	C267	*D3	C453	E2	C619	*B4	C742	*B3	C838	*F1	C936	D1	CL635	C2	IC223	*C3	IC615	*B4	L802	D1	R45	*A2	R158	A2	R274	*C3	R419	*F3	R511	*D4
C20	*A3	C118	*B2	C268	C3	C454	E3	C620	*B4	C743	*B3	C839	*F1	C937	*C2	CL636	B2	IC224	C3	IC616	*B4	L803	D1	R46	*A2	R159	B2	R275	*C3	R420	F2	R512	C4
C21	*B3	C119	B2	C269	*C3	C455	E3	C621	*B4	C744	*A3	C840	*F1	C938	*C2	CL638	C2	IC225	*E2	IC617	*B4	L804	D1	R47	*A2	R161	*B3	R276	*C3	R421	*E3	R513	E4
C22	B3	C120	*B3	C270	C3	C456	F3	C622	*B4	C745	*B3	C841	*F1	C939	*C2	CL639	C2	IC226	*E2	IC618	B4	L900	*D1	R48	*A2	R162	*B3	R277	C3	R422	F3	R517	*D2
C23	A3	C121	*B3	C271	C3	C457	*E2	C623	*B4	C746	*B3	C843	*F1	C940	*C2	CL640	C2	IC227	C3	IC619	A4	L901	F4	R49	*A2	R170	*D1	R278	C3	R423	*E2	R526	E2
C24	A2	C122	B2	C272	C3	C458	E2	C624	*B4	C747	*B4	C844	*E2	C941	*C2	CL641	C4	IC228	C3	IC620	B4	L902	*E4	R50	*A2	R171	*D2	R285	*C3	R424	*E3	R527	E2
C25	A3	C123	*B2	C273	*D3	C459	E2	C625	*B4	C748	*B4	C845	*E2	C942	*C2	CL642	C2	IC230	C3	IC621	*B4	L903	B2	R51	*A2	R172	*D2	R287	*C3	R425	*E2	R528	E2
C26	A3	C124	*B2	C274	*C3	C460	E2	C626	*A4	C749	*A3	C846	*E1	C943	*C2	CL643	C2	IC231	C3	IC622	*B4	L904	B3	R52	*A2	R173	D2	R288	*D2	R426	*F2	R529	E2
C27	B2	C125	*B2	C275	*C3	C461	*E2	C627	*A4	C750	*B3	C847	*F1	C944	*E3	CL740	A3	IC370	*C4	IC623	*B4	L908	*C2	R53	*A2	R174	D2	R289	*C3	R427	F3	R537	*E1
C28	B3	C126	*B2	C276	*C3	C462	*E2	C628	*B3	C751	*B3	C848	*F1	C945	*D3	CL741	B3	IC371	C3	IC624	B4	L950	D3	R54	*A2	R175	*D2	R290	*D3	R428	F3	R538	D4
C29	A2	C127	*B2	C277	D3	C463	E2	C629	B3	C752	*A3	C849	*E1	C946	*D3	CL742	B3	IC374	D3	IC625	*A4	L951	D3	R55	*A2	R191	A2	R291	*C3	R429	*F2	R539	D4
C30	A3	C128	*B2	C278	D3	C464	*E2	C630	B3	C753	*A3	C850	*E1	C948	*F4	CL900	D3	IC375	*D2	IC626	*C4			R56	*A2	R192	*A2	R292	*C3	R430	*E2	R540	D4
C31	*B2	C129	*B3	C279	D3	C465	*E2	C631	*B3	C754	*A3	C851	*F1	C949	*D1	CL901	E4	IC400	*F3	IC627	*C4	PH400	F3	R57	*A2	R193	A4	R293	C3	R431	F3	R541	D4
C32	*B2	C130	*B2	C280	D3	C466	*F3	C632	*C3	C755	*B4	C852	*F1	C950	D3			IC401	*F3	IC628	*C3			R58	*A2	R194	*A4	R294	*C3	R432	F3	R542	*D2
C33	*A3	C131	*B2	C281	*C3	C467	E3	C633	*B3	C756	*A4	C853	*E1	C951	D3	CN1	E4	IC402	F3	IC629	C4	Q1	*B3	R59	A3	R195	F1	R296	*C3	R433	*F2	R543	*D2
C34	*B2	C132	*B3	C282	D3	C468	*E2	C634	*B3	C757	*A4	C854	*E1	C952	D3	CN3	A3	IC404	*F3	IC630	A4	Q200	*D3	R60	A2	R196	*F1	R297	*C3	R434	*F3	R544	*C4
C35	*B2	C133	*B2	C283	C3	C469	E4	C635	*C3	C758	*A3	C855	*E1	C953	D3	CN6	A2	IC405	F3	IC631	C3	Q201	*D3	R61	A3	R197	E4	R299	D3	R435	*F3	R600	*B4
C38	*A2	C134	*B2	C284	C3	C470	E3	C636	*B4	C759	*A3	C856	*F1	C954	D3	CN10	*D2	IC406	F3	IC632	A4	Q202	*D3	R62	A2	R198	E4	R300	D3	R436	F3	R601	*B4
C39	*A2	C135	*B3	C286	D3	C471	E3	C637	*B3	C760	*A3	C857	*E2	C955	D3	CN11	D3	IC407	*F3	IC633	A4	Q206	*C3	R63	A2	R199	*C3	R306	D3	R437	F3	R603	*B4
C40	*A2	C136	*B3	C287	D3	C472	E3	C638	*C3	C761	*A3	C858	*F1	C956	D2	CN24	A3	IC408	F3	IC634	A4	Q207	*C3	R64	A3	R200	*C2	R307	D3	R438	F3	R604	*B4
C41	*A2	C137	*B2	C288	D3	C473	*E3	C641	*C4	C762	*A4	C859	*F1	C957	D2	CN200	C3	IC409	*F4	IC635	*A4	Q208	*C3	R65	B2	R201	*C3	R310	D3	R439	F3	R605	*A4
C42	*A2	C138	*B2	C289	D3	C474	*E3	C642	*C4	C763	A3	C860	*F1	C958	D2	CN402	F4	IC411	F3	IC636	*C3	Q209	C3	R66	B2	R202	*E1	R311	D3	R440	F3	R606	*A4
C43	*A2	C139	*B2	C290	D3	C475	*E3	C643	*B3	C764	A3	C861	D1	C959	D2	CN403	F3	IC412	*F2	IC637	*A4	Q214	C3	R67	A3	R203	*D3	R312	D3	R441	*E3	R607	*B4
C44	*A2	C140	*B2	C291	D3	C476	*F3	C644	*B4	C765	A3	C862	*E1	C960	*D2	CN601	B4	IC413	*F3	IC638	B4	Q370	*C4	R68	A2	R204	*D3	R313	D3	R442	D2	R608	*B4
C45	*A2	C141	*B2	C314	*C3	C477	E3	C645	*B3	C766	*A3	C863	*E2	C961	*E1			IC415	F3	IC639	*B4	Q402	*F3	R69	A2	R205	*D3	R314	D3	R443	D2	R609	*B4
C46	A3	C142	*B2	C315	*C3	C478	E3	C648	*B3	C767	*A3	C864	*E2	C962	*D2	D203	*C3	IC416	*D2	IC640	*C4	Q403	*F4	R70	A2	R206	*C2	R326	C3	R444	F4	R610	*A4
C47	B2	C143	*B2	C316	*C3	C479	*E2	C649	*B3	C768	*A3	C865	*E2	C963	D3	D370	*C4	IC417	F2	IC641	D4	Q404	*F2	R71	B2	R207	*D2	R327	*C3	R445	F4	R611	*B3
C48	*A2	C144	*B2	C317	*C3	C480	*E3	C652	C4	C771	*B3	C866	*E2	C964	D3	D400	*F3	IC418	*D2	IC642	A4	Q405	F3	R72	B2	R208	*D3	R328	C3	R446	*E2	R612	*B3
C49	*A2	C145	*B2	C318	C3	C481	*E3	C653	*B3	C772	*B3	C867	*F2	C970	*F3	D401	*F3	IC419	*F2	IC740	*B3	Q406	*F2	R73	A2	R209	*D3	R329	D3	R447	*D3	R613	B3
C50	*A2	C146	*B2	C319	*E2	C482	*F2	C654	*B3	C773	*B3	C868	*F2	C971	*F3	D402	F3	IC420	*E2	IC741	B3	Q407	F3	R74	B2	R210	*D3	R330	D3	R448	*E2	R614	C4
C51	*A2	C147	*C2	C320	*E2	C483	*F2	C655	*B3	C774	*B4	C869	*F2	C972	*F3	D403	*E2	IC421	*D3	IC742	A3	Q408	F3	R85	B2	R211	*D3	R331	D3	R449	*D3	R615	C4
C52	*A2	C148	*C2	C321	*E2	C484	F4	C656	*B3	C775	*A3	C870	*F2			D404	*F3	IC422	*E2	IC744	A3	Q409	F3	R86	B2	R212	*D3	R335	*C3	R450	*D2	R616	C3
C53	*A2	C149	*B2	C325	*E2	C485	F3	C657	*C3	C776	*B4	C871	*F2	CL3	B2	D600	A4	IC423	D3	IC745	*A3	Q500	D4	R87	B3	R213	*D3	R337	*C3	R451	*D2	R617	C3
C54	*A2	C150	B3	C370	*C4	C486	F3	C658	*B4	C777	A4	C872	*E2	CL4	B2	D601	A4	IC424	*E2	IC746	*A3	Q601	*B3	R88	B3	R214	*D3	R340	*C3	R452	*D2	R618	C3
C55	A3	C151	*B3	C371	*C4	C487	*F3	C659	*B4	C778	A3	C873	*F1	CL5	B2	D602	A4	IC425	E2	IC747	*A3	Q603	*C4	R89	B2	R215	*D3	R344	*C3	R453	*E2	R622	*B3
C56	*A2	C152	B2	C372	*C4	C488	*F3	C660	*B4	C779	A3	C874	*E1	CL6	C2	D603	A4	IC426	*E2	IC748	B3	Q604	*C4	R90	B2	R216	*D3	R345	*C3	R454	*E3	R625	*B3
C57	*A2	C153	B2	C373	*C4	C489	*F3	C661	B4	C780	*A3	C875	*F1	CL7	C2			IC427	*E2	IC758	*A3	Q751	*A3	R91	B2	R217	*D3	R346	*C3	R455	*E2	R626	*B3
C58	*A2	C154	B2	C374	*C4	C490	*F3	C662	A4	C781	A3	C876	*E1	CL200	D2	E1	A3	IC428	*E2	IC759	*A4	Q752	*A3	R92	B2	R218	*D3	R347	*C3	R456	D3	R627	*B3
C59	A2	C170	*D2	C377	C3	C491	*F3	C663	B3	C782	*B3	C877	*F2	CL201	*E2	E2	A4	IC429	*E2	IC760	*A3	Q900	*E4	R93	B3	R219	*D3	R348	C3	R457	D3	R628	*B3
C60	*A2	C171	*D2	C378	C3	C492	*F3	C664	B4	C783	*A3	C878	*E2	CL202	*D2	E3	*A3	IC430	*F3	IC761	*A3	Q901	*E4	R94	B2	R220	*D3	R349	C3	R458	*E2	R630	B3
C61	*A2	C172	*D2	C400	*F3	C493	*F3	C665	A4	C784	*A3	C879	*F2	CL203	*D2	E4	*C3	IC431	*E2	IC762	B4	Q902	*E4	R95	B2	R221	*D3	R350	*F2	R459	D3	R631	B3
C62	*A2	C201	*E1	C401	F3	C494	*F3	C666	B3	C785	B4	C880	*E2	CL204	*D2	E6	*C3	IC433	E3	IC763	A4	Q903	*E4	R96	B2	R222	*C3	R351	*F2	R460	D3	R632	B3
C63	*B2	C202	D2	C402	F3	C495	*E4	C667	B4	C786	B4	C881	*E1	CL216	*D2	E7	*C3	IC434	E3	IC764	A4	Q904	*F4	R97	B2	R223	*C3	R352	*E2	R461	E3	R633	B3
C64	A3	C203	*C2	C403	*F3	C496	*E4	C668	A4	C787	*A3	C882	*F2	CL217	*D2	E9	B1	IC435	E3	IC765	A3	Q905	F4	R98	B2	R224	*C3	R353	*E2	R462	E3	R636	*B4
C65	A2	C204	*C3	C404	F2	C497	*E4	C669	B4	C788	A4	C883	*F2	CL218	*D2	E10	*F3	IC436	E3	IC800	D1	Q906	*F4	R99	B2	R225	*D3	R354	C3	R463	E3	R637	A4
C66	A2	C205	*C2	C405	*F2	C498	*E4	C670	*B4	C789	A4	C884	*E1	CL219	*D2	E11	D1	IC437	E3	IC801	D1	Q907	*F4	R100	B3	R226	*C3	R355	*E2	R464	E3	R638	*B4
C67	A3	C206	*D3	C406	F3	C499	F3	C671	*B4	C790	A4	C885	*E1	CL220	D3	E12	C4	IC438	E3	IC802	C1			R101	B2	R227	*C3	R356	*E2	R465	*E3	R639	*B4
C68	A2	C207	*D3	C407	F2	C501	C3	C672	A4	C791	A4	C886	*E1	CL221	D3			IC439	*E3	IC803	F1	R1	*A3	R102	B2	R228	*D3	R357	*E2	R466	*E2	R640	A4
C69	A2	C208	*D3	C408	*F2	C502	D3	C673	*B4	C792	A3	C887	*F2	CL222	D3	FB400	F3	IC440	*E3	IC804	*B1	R2	B3	R103	B2	R229	*D3	R358	*E2	R467	*E2	R641	*B4
C70	A3	C209	*D3	C409	*F3	C503	*E4	C674	*B4	C793	A3	C888	*E1	CL223	D3	FB401	*F2	IC441	E3	IC805	F2	R3	B3	R104	B3	R230	*C3	R359	*E2	R468	*E2	R642	*B3
C71	A2	C210	*C2	C410	F3	C504	E4	C675	*B4	C794	*A4	C889	*E1	CL224	D3			IC442	*F3	IC901	*E4	R4	B3	R105	B2	R231	*C3	R360	*E2	R469	*E2	R643	*B3
C72	A2	C211	*D3	C411	*F3	C505	E4	C676	*B4	C795	*A3	C890	*E1	CL225	D3	FL2	*A2	IC443	*E3	IC902	*F4	R5	*A3	R106	B2	R232	*C3	R361	*E2	R470	*E2	R644	*A4
C73	B2	C212	*D3	C412	F3	C506	E4	C677	A4	C796	*B4	C892	*F2	CL400	F3	FL3	*A2	IC444	*F2	IC904	*F4	R6	*A3	R107	B2	R233	*C3	R362	C3	R471	*D2	R645	C3
C74	A3	C213	*C3	C414	*F4	C507	C4	C678	*B3	C800	*C1	C893	*F2	CL401	E3	FL4	*A2	IC445	*F2	IC905	*D3	R7	*A3	R108	B3	R234	*D3	R363	D2	R472	*E2	R646	*C2
C75	B2	C214	*D3	C416	F3	C509	*D4	C679	A4	C801	*C1	C894	*F2	CL501	D4			IC446	F3	IC907	*F4	R8	*A3	R109	B3	R235	*D3	R371	*D4	R473	E2	R647	*C2
C76	A2	C215	*D3	C417	*F3	C510	D4	C680	*B4	C802	*C1	C896	*E1	CL502	D4	IC1	C2	IC462	*E4	IC908	F3	R9	*B3	R110	B2	R236	*D3	R372	*C4	R474	*E2	R648	*C4
C77	A2	C216	*D3	C418	*F3	C511	D4	C681	*B4	C803	*C1	C897	*E1	CL503	D3	IC2	E1	IC463	*F3	IC909	*F3	R10	*B3	R111	B2	R237	*D3	R373	*C4	R475	*E2	R649	*C4
C78	A3	C217	*D3	C419	F3	C512	D4	C682	B4	C804	*D1	C898	*D1	CL504	E4	IC3	A3	IC470	F4	IC910	*F3	R11	*A3	R112	B2	R238	*C3	R374	*C4	R476	*F3	R650	*C3
C79	A2	C218	*D3	C420	*F3	C513	D4	C683	*B3	C805	*D1	C900	B2	CL600	B4	IC4	B3	IC500	C3	IC911	*F3	R12	*A3	R113	B3	R239	*C3	R375	*C4	R477	*E2	R651	*C4
C80	*A3	C219	*D3	C421	*F3	C514	*F4	C684	B3	C806	*D1	C901	F4	CL601	B4	IC5	A3	IC502	E3	IC912	*F3	R13	*A3	R115	B2	R240	*D3	R376	*C4	R478	*E2	R652	*C3
C81	*A2	C220	*C3	C422	*F3	C515	E4	C685	B4	C807	*D1	C902	E4	CL602	B4	IC6	*B3	IC503	*E4	IC913	*F3	R14	*A3	R116	B3	R241	*C3	R377	*C4	R479	*E2	R653	*C4
C82	*B2	C221	*D3	C423	*F3	C516	D4	C686	*A4	C808	*C1	C903	B2	CL603	B4	IC7	*B3	IC505	E4	IC914	*F3	R15	*A3	R117	B3	R242	*D3	R378	*C4	R480	*E2	R654	A4
C83	*B2	C222	*C3	C424	F3	C517	*E4	C687	*A4	C809	*C1	C906	C3	CL604	B4	IC8	*A3	IC506	E4			R16	*B3	R118	B2	R243	*D3	R379	*C4	R481	E3	R655	C4
C84	*A2	C223	*C3	C425	*D2	C518	*E4	C688	*B3	C810	*D1	C907	*C2	CL605	B4	IC9	B3	IC507	E4	L2	*B3	R17	B3	R119	B3	R244	*C3	R380	*C4	R482	E4	R656	A4
C85	*A2	C224	*D3	C426	*F3	C519	D4	C689	*B3	C811	*D1	C908	*F4	CL606	B4	IC10	A2	IC508	E4	L3	*A3	R18	*B3	R120	B2	R245	*C3	R381	*C4	R483	*E3	R657	C3
C86	*A2	C225	*D3	C427	*F3	C520	*C4	C690	*C4	C812	*D1	C909	*C2	CL607	B4	IC11	*A2	IC509	*C4	L4	*B2	R19	*A3	R121	B2	R246	*C3	R382	C3	R484	*E3	R658	A4
C87	*B2	C226	*C3	C428	F2	C521	D2	C691	*C4	C813	*D1	C910	*C2	CL608	B4	IC12	*A2	IC510	D4	L5	B3	R20	*B3	R122	B2	R247	*C3	R383	C3	R485	*E2	R659	A4
C88	*A2	C227	*C3	C429	F2	C528	C3	C692	*C4	C814	*D1	C911	*C2	CL609	B4	IC13	A2	IC511	*E4	L7	*B3	R21	*B3	R123	B2	R248	*D3	R384	C3	R486	*F4	R660	*C3
C89	*B2	C228	*C3	C430	*E2	C540	D4	C693	*C4	C815	*D1	C912	*C2	CL610	B4	IC14	A2	IC512	*E4	L200	*C3	R22	*A3	R124	B2	R249	*D3	R385	C3	R487	*E2	R661	*A4
C94	*B2	C229	*D3	C431	*D2	C541	D3	C694	*C4	C816	*D2	C913	*E4	CL611	B4	IC15	B2	IC513	*E4	L202	*C3	R23	*A2	R125	B2	R250	*C3	R386	C3	R488	*E2	R662	*A4
C95	*B3	C232	*D3	C432	*F4	C542	*E4	C695	*C3	C817	*D2	C914	*E4	CL612	B4	IC16	B3	IC514	*D4	L203	*C3	R24	*A2	R126	B2	R251	*D3	R387	C3	R489	*E2	R663	*C3
C96	*B2	C234	*C3	C433	*F2	C543	*E4	C696	A4	C818	*D2	C915	*C2	CL613	B4	IC17	B2	IC515	*D4	L204	*C3	R25	*A2	R127	*B2	R252	*C3	R388	C3	R490	*F3	R664	*A4
C97	*B2	C235	*C3	C434	F3	C600	*B4	C697	C3	C819	*D2	C916	*C2	CL614	B4	IC18	B2	IC516	C4	L206	*C3	R26	*A2	R128	*B2	R253	*C3	R400	F3	R491	*F3	R665	*B4

DCP-37A, DET-43G, DIF-167

R666	*A4	R790	A3	RB10	B2	RB512	*C4
R667	C4	R791	A4	RB11	B3	RB513	*D4
R668	*B4	R792	A4	RB12	B3	RB514	C4
R669	B4	R793	A3	RB13	B3	RB515	*C4
R670	C4	R794	A4	RB14	B2	RB516	*C4
R671	C4	R795	A4	RB15	B2	RB517	*C4
R672	*B4	R796	A3	RB16	B2	RB521	D4
R673	B4	R797	*A3	RB17	C3	RB522	D4
R674	*B4	R798	*A3	RB18	B3	RB523	D4
R675	*B4	R799	*A3	RB19	D2	RB525	D4
R676	*B4	R802	*B1	RB20	D2	RB526	D3
R677	*C4	R803	*C1	RB21	D2	RB527	D4
R678	C4	R804	*E1	RB22	D2	RB529	D4
R679	C4	R805	*B1	RB23	D2	RB530	D4
R680	D4	R901	*E4	RB200	D2	RB531	D4
R681	D4	R902	*E4	RB201	D2	RB532	*D4
R682	A4	R903	*E4	RB202	*D2	RB533	*D3
R683	C4	R904	*E4	RB203	D2	RB539	*C4
R684	A4	R905	*E4	RB204	D2	RB540	D4
R685	B4	R906	*E4	RB205	D2	RB541	D4
R686	B4	R907	*E4	RB206	D2	RB542	D4
R687	B4	R908	*E4	RB207	*D1	RB543	D4
R688	B4	R909	*E4	RB208	*D1	RB544	D4
R689	B4	R910	*E4	RB209	*E1	RB546	D4
R690	B4	R911	*E4	RB210	*D1	RB547	D4
R691	*B3	R912	*E4	RB211	*D1	RB548	D4
R692	*B3	R913	*F4	RB212	*D1	RB549	*D4
R693	*B4	R914	*F4	RB213	*E2	RB550	D4
R694	*B4	R915	*F4	RB214	*E2	RB551	D2
R695	C4	R916	*F4	RB215	*D2	RB552	D2
R728	A3	R918	*F4	RB216	*E2	RB554	*C2
R729	A4	R920	F4	RB217	*D2	RB555	*D2
R730	A4	R921	F4	RB218	*D2	RB556	*D2
R731	A3	R922	*F4	RB219	*E2	RB557	*D2
R732	A3	R923	*F4	RB220	*E2	RB558	*C3
R733	A3	R924	*F4	RB221	*D3	RB559	*C3
R734	A3	R929	*D3	RB222	*D3	RB560	C3
R735	A3	R930	*D3	RB223	*C3	RB561	C3
R736	A3	R931	*F4	RB224	D3	RB562	D4
R737	A3	R932	*F4	RB225	D3	RB565	*D1
R738	A3	R933	F4	RB226	*E2	RB566	*D1
R739	A3	R934	F4	RB227	*E2	RB568	*E1
R740	A3	R950	D3	RB228	*F2	RB569	*E1
R741	A3	R951	D3	RB229	*F2	RB570	E2
R742	A3	R952	D3	RB230	*F2	RB576	D4
R743	A3	R953	D3	RB231	*F2	RB577	D3
R744	*A4	R954	D3	RB232	*E2	RB578	E4
R745	*A3	R955	D3	RB233	*E2	RB579	E4
R746	*A3	R958	D2	RB234	*E2	RB580	*D1
R747	*A4	R959	*D2	RB235	*E2	RB581	D4
R748	*A3	R960	*D2	RB236	*E2	RB582	D4
R749	*A3	R961	D3	RB237	*E2	RB583	*C4
R750	A3	R970	F3	RB238	*E2	RB600	*B4
R751	*A3	R971	*F3	RB239	*E2	RB601	*A4
R752	A3	R972	*F3	RB401	F3	RB602	*A4
R753	A3	R973	*F3	RB402	E3	RB603	*C4
R754	A3	R974	*F3	RB403	E3	RB604	*C4
R755	*A3	R975	*F3	RB404	E3	RB605	*B4
R756	A3	R976	*F3	RB405	*E2	RB606	*C2
R757	A3	R977	*F3	RB406	*E3	RB607	*C2
R758	A3	R978	*E3	RB407	*E2	RB608	*C2
R759	*A3	R979	*E4	RB408	*E2	RB609	*C2
R760	A3	R980	*E4	RB409	E2	RB610	*C2
R761	A3	R981	*E4	RB410	*E2	RB611	*C2
R762	A3	R982	*E4	RB411	E2	RB612	*B4
R764	*A3	R983	C4	RB412	*E2	RB747	*A3
R765	*A3	R984	C4	RB414	*E3	RB748	*A4
R766	A3	R985	E2	RB415	*E3	RB749	*A3
R767	A3	R986	*E4	RB416	*F3	RB900	*E3
R768	B3	R987	*F3	RB417	*F3	RB901	*E3
R769	B3	R988	*E4	RB418	*E3	RB902	*D3
R770	*A3	R989	*E4	RB419	*E3		
R771	B4	R990	*E4	RB420	*E4	S501	C4
R772	B3	R991	*E4	RB421	*E3	S502	C4
R773	*A3	R992	*E2	RB422	*F3		
R774	*A3	R993	*E2	RB423	*F3	SL3	*F3
R775	*A4	R994	*E4	RB424	*F3	SL601	A4
R776	*A4	R995	*E4	RB425	*E4	SL602	A4
R777	*A3	R996	*F3	RB426	*F4	SL603	A4
R778	*A3	R997	*F3	RB427	*E3	SL604	A4
R779	*A4	R998	*F3	RB428	*E3		
R780	*A3			RB429	*F3	THP400	*F4
R781	*A4	RB1	B3	RB430	F4		
R782	*A4	RB2	A3	RB431	D2	X401	*E2
R783	*A4	RB3	B3	RB500	C3	X600	B4
R784	*A3	RB4	B3	RB501	C3	X601	B4
R785	A4	RB5	*A3	RB504	D3	X602	B4
R786	A4	RB6	B3	RB505	E3		
R787	A3	RB7	*B3	RB509	*D4		
R788	A4	RB8	B2	RB510	C4		
R789	A4	RB9	B2	RB511	C4		

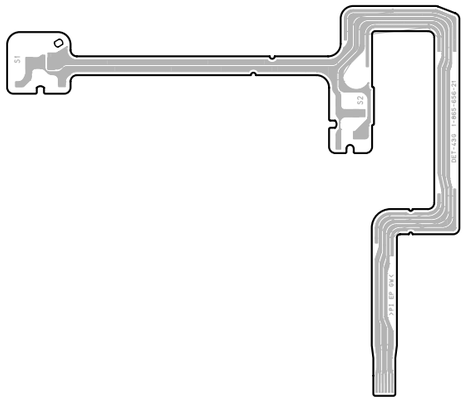

DET-43G -A SIDE-
SUFFIX: -21

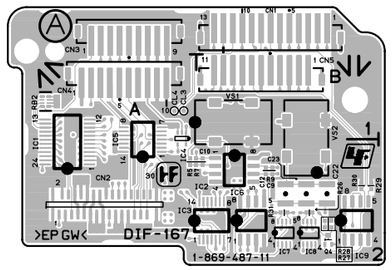

DIF-167 -A SIDE-
SUFFIX: -11

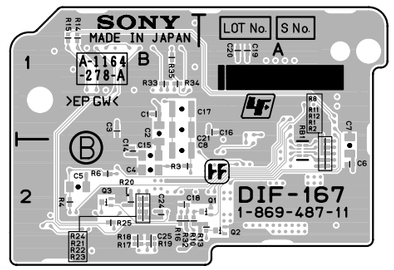

DIF-167 -B SIDE-
SUFFIX: -11

```
----------------------
DIF-167 (1-869-487-11)
----------------------

*:B SIDE
```

C1	*B1	R1	*A2
C2	*B1	R2	*A2
C3	*B1	R3	*B2
C4	*B2	R4	*B2
C5	*B2	R5	A2
C6	*A2	R6	*B2
C7	*A2	R7	A2
C8	*B2	R8	*A2
C9	B2	R9	B2
C10	B2	R10	*B2
C12	B2	R11	*A2
C14	*B2	R12	*A2
C15	*B2	R13	*A2
C16	*A1	R14	*B1
C17	*B1	R15	*B1
C18	*B2	R16	*B2
C19	*A1	R17	*B2
C20	*A1	R18	*B2
C21	*B1	R19	*B2
C22	B2	R20	*B2
C23	B2	R21	*B2
C24	*B2	R22	*B2
C25	*B2	R23	*B2
CL3	A1	R24	*B2
CL4	A1	R25	*B2
CN1	B1	R26	B2
CN2	A2	R27	B2
CN3	A1	R28	B2
CN4	A1	R29	B2
CN5	B1	R30	B2
		R31	B2
IC1	A2	R32	*B2
IC2	B2	R33	*B1
IC3	B2	R34	*B1
IC4	A1	R35	*B1
IC5	A2		
IC6	B2	RB1	*A2
IC7	B2	RB2	A1
IC8	B2		
IC9	B2	VS1	B1
		VS2	B1
Q1	*A2		
Q2	*A2		
Q3	*B2		
Q4	B2		

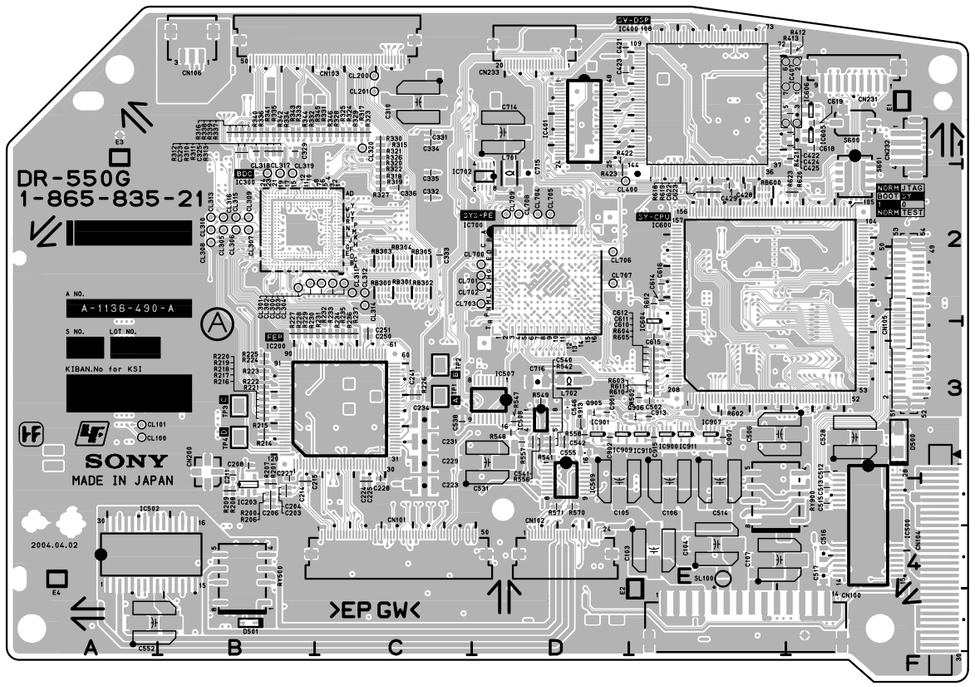

DR-550G -A SIDE-
SUFFIX: -21

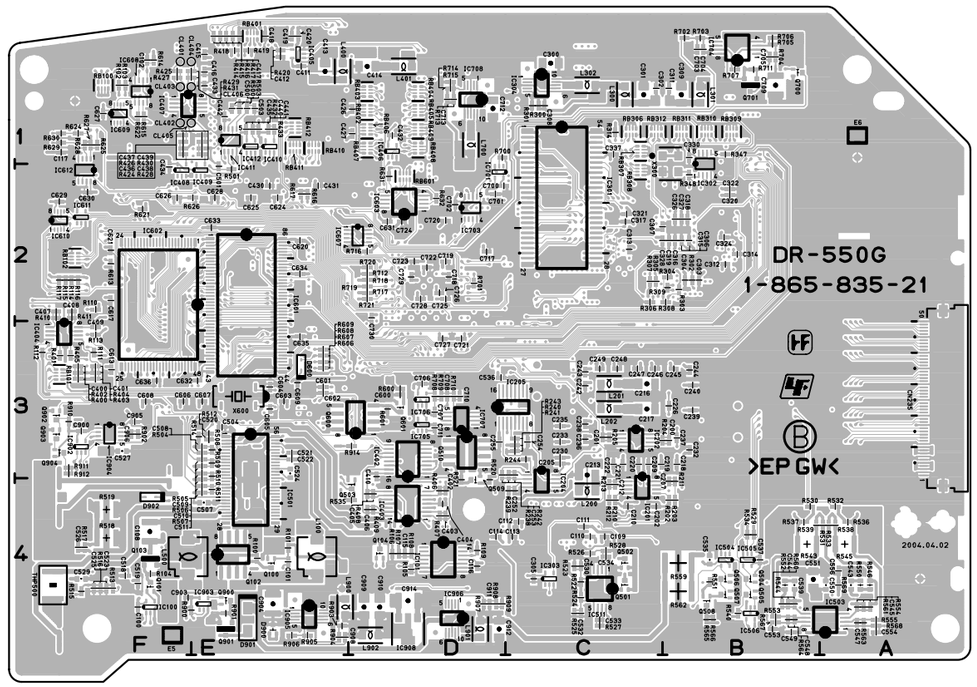

DR-550G -B SIDE-
SUFFIX: -21

DR-550G (1-865-835-21)
---

*:B SIDE

C100	*F4	C230	*C3	C322	*B2	C432	*D1	C538	C3	C629	*F2	C909	*D4	CL708	D2	IC406	*D1	IC908	*D4
C101	*E4	C231	C3	C323	B1	C433	*E1	C539	*B4	C630	*F2	C910	*D4	CL709	D2	IC407	*F1	IC909	D3
C102	*F1	C232	*B3	C324	*B2	C434	*F2	C540	D3	C631	*D2	C911	*D4	CN100	E4	IC408	*F2	IC910	E3
C103	E4	C233	*C3	C325	B1	C435	*E1	C541	D3	C632	*E3	C912	*D4	CN101	C4	IC409	*E2	IC911	E3
C104	E4	C234	C3	C326	*B2	C436	*F1	C542	D3	C633	*E2	C913	E3	CN102	D4	IC410	*E1		
C105	D4	C235	*C3	C327	*B2	C437	*F1	C543	*A4	C634	*E2	C914	*D4	CN103	C1	IC411	*E1	L100	*E4
C106	E4	C236	*C3	C328	*C2	C438	*E1	C544	*B4	C635	*E3	C915	E3	CN104	F4	IC412	*E1	L200	*C4
C107	E4	C237	*B3	C329	B1	C439	*E1	C545	*A4	C636	*F3			CN105	F3	IC500	F3	L201	*C3
C108	*F4	C238	*C3	C330	*B1	C440	*E1	C546	D3	C700	*D2	CL100	A3	CN106	B1	IC501	*E3	L202	*C3
C109	*C4	C239	*B3	C331	C1	C441	*E1	C547	*A4	C701	*D2	CL101	A3	CN200	B3	IC502	A4	L300	*C1
C110	*C4	C240	*B3	C332	C2	C442	*E1	C548	*B4	C702	*D2	CL200	C1	CN231	F1	IC503	*A4	L301	*B1
C111	*C4	C241	C3	C333	C2	C500	*E1	C549	*B4	C703	*B1	CL201	C1	CN232	F1	IC504	*B4	L302	*C1
C112	*C4	C242	*C3	C334	C1	C501	*E2	C550	*A4	C704	*B1	CL300	C2	CN233	D1	IC505	*B4	L400	*E1
C113	*C4	C243	*C3	C335	C2	C502	E3	C551	*B4	C705	*B1	CL301	B2	CN235	*A3	IC506	*B4	L401	*D1
C114	*D4	C244	*B3	C336	C2	C503	*E1	C552	A4	C706	*D3	CL302	B2			IC507	D3	L500	*F4
C115	*D4	C245	*B3	C337	*C1	C504	*E3	C553	*B4	C707	*D3	CL303	C2	D500	F3	IC508	D3	L700	*D1
C116	*D4	C246	*C3	C400	*F3	C506	E3	C554	*A4	C708	*D3	CL304	C2	D501	B4	IC509	D3	L701	D2
C117	*F1	C247	*C3	C401	*F3	C507	*E4	C555	D3	C709	*B1	CL305	B2	D600	*E3	IC511	*C4	L702	D3
C200	*B3	C248	*C3	C402	*D4	C508	*E3	C556	*A4	C710	*D3	CL306	B2	D900	*E4	IC600	E2	L900	*E4
C201	*C3	C249	*C3	C403	*D4	C509	*E3	C600	*D3	C711	*D3	CL307	B2	D901	*E4	IC601	*E2	L901	*D4
C202	*C4	C250	C3	C404	*D4	C510	*E4	C601	*E3	C712	*D1	CL308	B2	D902	*F4	IC602	*E2	L902	*D4
C203	B4	C251	C3	C405	*D4	C511	*E4	C602	*E3	C713	*D1	CL309	B2			IC603	*D2		
C204	B4	C252	*C4	C406	*D4	C512	F3	C603	*E3	C714	D1	CL310	B2	E1	F1	IC604	E2	Q100	*E4
C205	*C3	C253	*C3	C407	*F2	C513	F4	C604	*E3	C715	D2	CL311	C2	E2	E4	IC605	F1	Q101	*F4
C206	B4	C254	*C3	C408	*F2	C514	E4	C605	*E3	C716	D3	CL312	C2	E3	A1	IC606	F1	Q102	*E4
C207	*B4	C255	*D3	C409	*F3	C515	F4	C606	*F3	C717	*D2	CL313	B2	E4	A4	IC607	*D2	Q103	*F4
C208	B3	C300	*C1	C410	*D3	C516	F4	C607	*E3	C718	*D2	CL314	C2	E5	*F4	IC608	*F1	Q104	*D4
C209	*C3	C301	*C1	C411	*E1	C517	F4	C608	*F3	C719	*D2	CL315	B2	E6	*A1	IC609	*F1	Q501	*C4
C210	*C4	C302	*C1	C412	*E1	C518	*F4	C609	*E3	C720	*D2	CL316	B2			IC610	*F2	Q502	*C4
C211	B3	C303	*B2	C413	*E1	C519	*F4	C610	E3	C721	*D3	CL317	B2	IC100	*F4	IC611	*F2	Q503	*D4
C212	*C4	C304	*B2	C414	*D1	C520	*E3	C611	E3	C722	*D2	CL318	B2	IC101	*D4	IC612	*F2	Q504	*B4
C213	*C3	C305	*C4	C415	*E1	C521	*E3	C612	E3	C723	*D2	CL319	B2	IC200	C3	IC700	D2	Q505	*B4
C214	B4	C306	*B2	C416	*E1	C522	*E3	C613	*F3	C724	*D2	CL320	C1	IC201	*C4	IC701	*D2	Q506	*B4
C215	B4	C307	*C2	C417	*E1	C523	*F4	C614	E2	C725	*D2	CL400	D2	IC202	*C3	IC702	D2	Q507	*B4
C216	*C3	C308	*C1	C418	*E1	C524	*E3	C615	E3	C726	*D2	CL401	*F1	IC203	B4	IC703	*D2	Q508	*B4
C217	*C3	C309	*B1	C419	*E1	C525	*F4	C616	E2	C727	*D3	CL402	*F1	IC204	*C3	IC704	*B1	Q509	*D4
C218	*B3	C310	C1	C420	*E1	C526	*F4	C617	*F2	C728	*D2	CL403	*F1	IC205	*D3	IC705	*D3	Q510	*D3
C219	*C3	C311	*B1	C421	D1	C527	*F3	C618	F1	C729	*D2	CL404	*F1	IC300	B2	IC706	*D3	Q600	*D3
C220	*C3	C312	*B2	C422	F1	C528	F3	C619	F1	C730	*D2	CL405	*F1	IC301	*C1	IC707	*D3	Q601	*D3
C221	*C3	C313	*C2	C423	D1	C529	*F4	C620	*E2	C900	*F3	CL406	*F1	IC302	*B1	IC708	*D1	Q700	*B1
C222	*C3	C314	*B2	C424	F1	C530	*C4	C621	*F2	C901	D3	CL700	D2	IC303	*C4	IC900	E3	Q701	*B1
C223	C4	C315	*B2	C425	F1	C531	D3	C622	E2	C902	D3	CL701	D2	IC304	*C1	IC901	D3	Q900	*E4
C224	C4	C316	*B2	C426	*D1	C532	*C4	C623	E2	C903	*F4	CL702	D2	IC400	E1	IC902	*F3	Q901	*E4
C225	C4	C317	*C2	C427	*D1	C533	*C4	C624	*E2	C904	*E4	CL703	D2	IC401	D1	IC903	*E4	Q902	*F3
C226	*B3	C318	*B2	C428	E2	C534	*C4	C625	*E2	C905	*F3	CL704	D2	IC402	*D3	IC904	*F3	Q903	*F3
C227	B3	C319	*B2	C429	E2	C535	*B4	C626	*F2	C906	*F3	CL705	D2	IC403	*D4	IC905	*E4	Q904	*F3
C228	C3	C320	*B2	C430	*E2	C536	*D3	C627	*F1	C907	E3	CL706	D2	IC404	*F3	IC906	*D4	Q905	D3
C229	C3	C321	*C2	C431	*E2	C537	*B4	C628	*E2	C908	*E4	CL707	D2	IC405	*E1	IC907	E3	Q906	E3

R100	*E4	R230	B3	R333	B1	R432	*E1	R546	*A4	R622	*F1	RB100	*F1						
R101	*E4	R231	C3	R334	B1	R433	*E1	R547	D3	R623	F2	RB101	*F3						
R102	*F1	R232	C3	R335	B1	R500	*E1	R548	D3	R624	*F1	RB102	*F2						
R103	*F1	R233	C3	R336	B1	R501	*E2	R549	D3	R625	*F1	RB300	C2						
R104	*F4	R234	C3	R337	B1	R502	E3	R550	*A4	R626	*E2	RB301	C2						
R105	*D4	R235	C3	R338	B1	R503	*E1	R551	*B4	R627	*F1	RB302	C2						
R106	*D4	R236	C3	R339	B1	R504	*E3	R552	*B4	R628	*F1	RB303	C2						
R107	*D4	R237	C3	R340	B1	R505	*E3	R553	*B4	R629	*F1	RB304	C2						
R108	*D4	R238	*D3	R341	B1	R506	*E3	R554	*A4	R630	*F1	RB305	C2						
R109	*D4	R239	*C4	R342	B1	R507	*E4	R555	*A4	R631	*D2	RB306	*C1						
R110	*F2	R240	*C3	R343	B1	R508	*E3	R556	D3	R632	*D2	RB307	*C1						
R111	*F3	R241	*C3	R344	B1	R509	*E3	R557	D3	R700	*D1	RB308	*C2						
R112	*F3	R242	*C3	R345	C1	R510	*E3	R558	D3	R701	*D2	RB309	*B1						
R113	*F3	R243	*C3	R346	C1	R511	*E4	R559	*B4	R702	*B1	RB310	*B1						
R114	*F2	R244	*C3	R347	*B1	R512	*E3	R560	*B4	R703	*B1	RB311	*B1						
R115	*F2	R300	*C1	R348	*B2	R513	*F4	R561	*A4	R704	*B1	RB312	*C1						
R116	*F2	R301	*C1	R400	*F3	R514	*E3	R562	*B4	R705	*B1	RB401	*E1						
R117	*F2	R302	*B2	R401	*F3	R515	*F4	R563	*A4	R706	*B1	RB402	*D1						
R200	B4	R303	*B2	R402	*F3	R516	*F4	R564	*B4	R707	*B1	RB403	*D1						
R201	B4	R304	*B2	R403	*F3	R517	*F4	R565	*B4	R708	*D3	RB404	*D1						
R202	*B4	R305	*C2	R404	*F3	R518	*F4	R566	*B4	R709	*D3	RB405	*D1						
R203	*B4	R306	*C2	R405	*F3	R519	*F4	R567	*B4	R710	*D3	RB406	*D1						
R204	*C3	R307	*C2	R406	*D4	R520	*D4	R568	*A4	R711	*B1	RB407	*D1						
R205	*C3	R308	*B2	R407	*D4	R521	*D4	R569	*A4	R712	*D2	RB408	*D1						
R206	B4	R309	*B2	R408	*D4	R522	*C4	R570	D4	R713	*D1	RB409	*D1						
R207	B4	R310	B1	R409	*D4	R523	*C4	R571	D4	R714	*D1	RB410	*E1						
R208	B4	R311	B1	R410	*F2	R524	*C4	R600	*D3	R715	*D1	RB411	*E1						
R209	B4	R312	B1	R411	*F2	R525	*C4	R601	*D3	R716	*D2	RB412	*E1						
R210	*C4	R313	B1	R412	F1	R526	*C4	R602	E3	R717	*D2	RB600	E2						
R211	*B4	R314	*C1	R413	F1	R527	*C4	R603	E3	R718	*D2	RB601	*D2						
R212	*C4	R315	C1	R414	*E1	R528	*C4	R604	E3	R719	*D2								
R213	*C4	R316	B1	R415	*E1	R529	*B4	R605	E3	R720	*D2	RY500	B4						
R214	B3	R317	C1	R416	*E1	R530	*B4	R606	*E3	R721	*D2	RY900	E4						
R215	B3	R318	C2	R417	*E1	R531	*A4	R607	*E3	R900	*F4								
R216	B3	R319	C2	R418	*E1	R532	*A4	R608	*E3	R901	*E4	S600	F1						
R217	B3	R320	C1	R419	*E1	R533	*A4	R609	*E3	R902	*F3	S601	F2						
R218	B3	R321	C1	R420	*E1	R534	*B4	R610	E3	R903	*E4								
R219	B3	R322	C2	R421	F1	R535	*D4	R611	E3	R904	*E4	SL100	E4						
R220	B3	R323	C1	R422	D2	R536	*A4	R612	E2	R905	*E4								
R221	B3	R324	C1	R423	D2	R537	*B4	R613	*F2	R906	*E4	THP500	*F4						
R222	B3	R325	C1	R424	*F1	R538	*A4	R614	*F1	R907	*D4								
R223	B3	R326	C1	R425	*F1	R539	*B4	R615	*F1	R908	*D4	TP1	C3						
R224	B3	R327	C2	R426	*F1	R540	*B4	R616	*E2	R909	*D4	TP2	C3						
R225	B3	R328	C1	R427	*F1	R541	D3	R617	*E2	R910	*F3	TP3	B3						
R226	C3	R329	C1	R428	*E1	R542	D3	R618	E2	R911	*F3	TP4	B3						
R227	B3	R330	C1	R429	*F1	R543	*B4	R619	E2	R912	*F3								
R228	B3	R331	C1	R430	*E1	R544	*B4	R620	F2	R913	D3	X300	*B1						
R229	B3	R332	B1	R431	*F1	R545	*A4	R621	*F2	R914	*D3	X600	*E3						

DU-318, DU-398, DVP-29, ENC-100

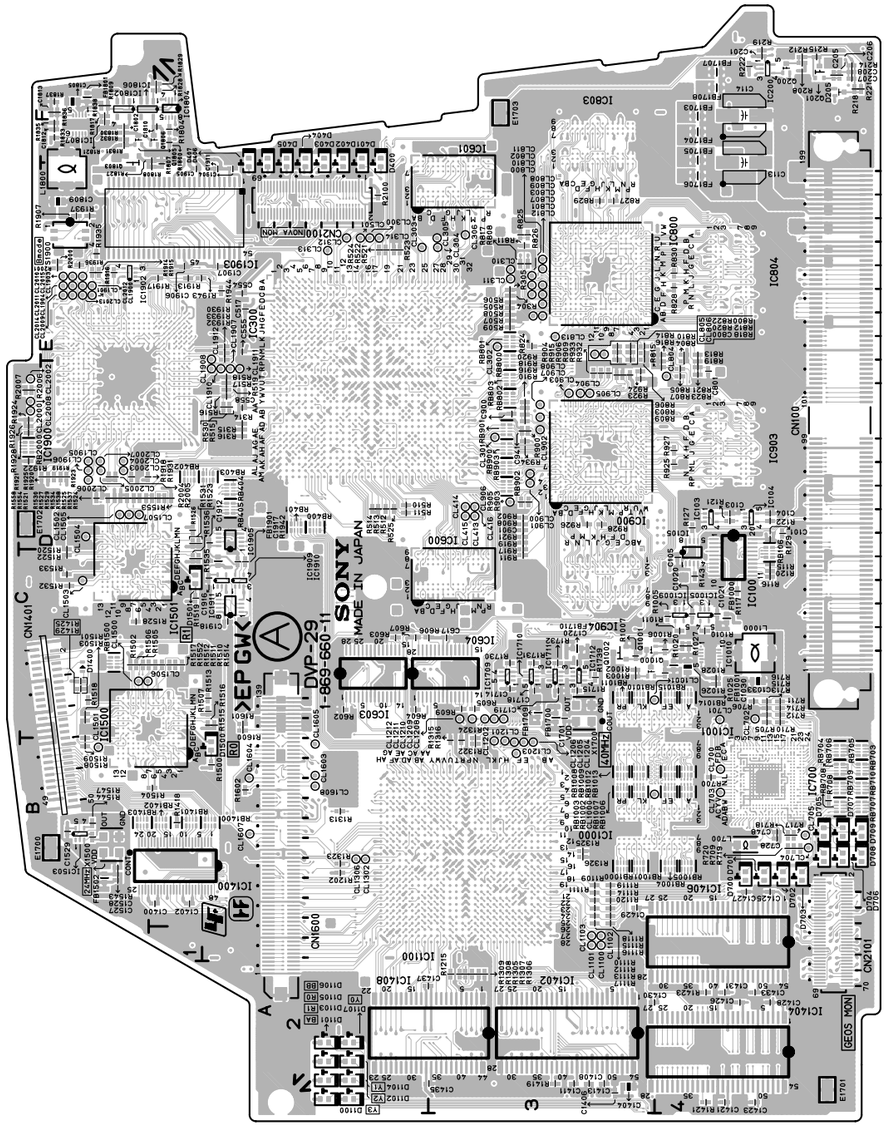

DVP-29 -A SIDE-
SUFFIX: -11

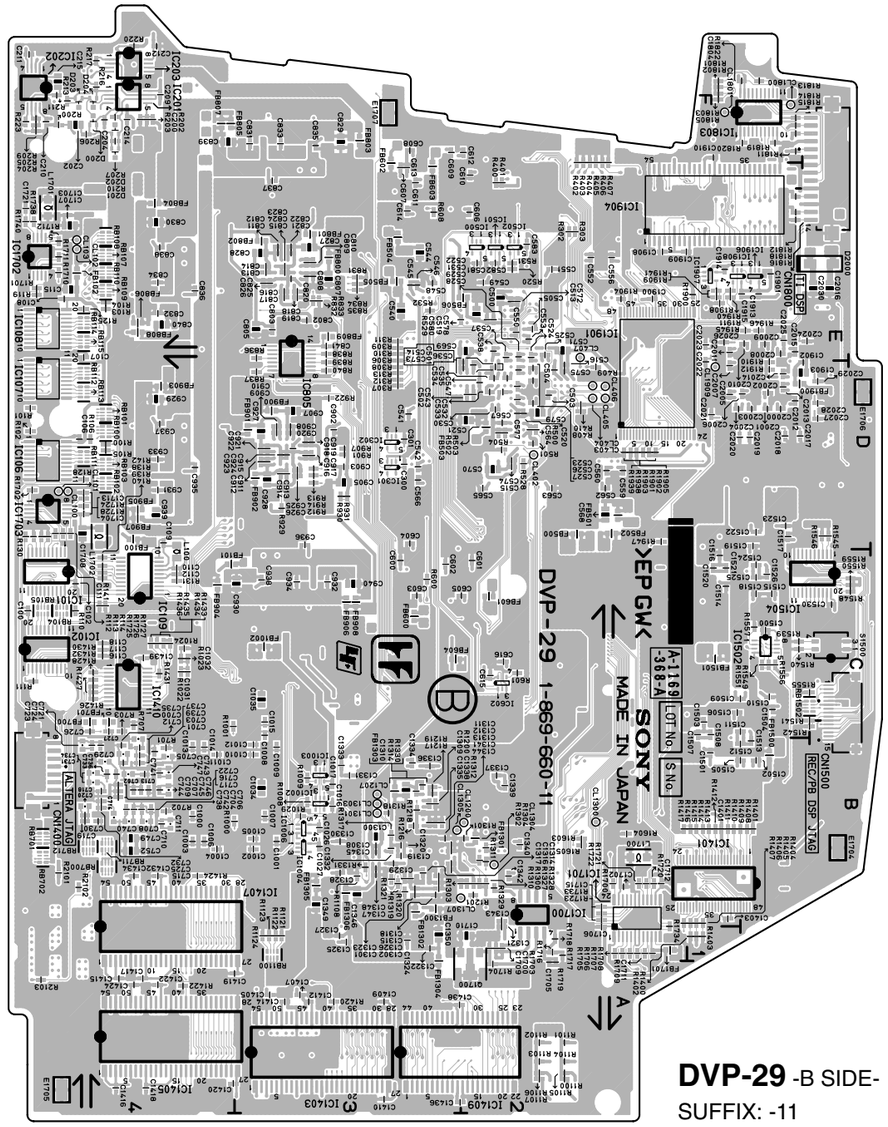

DVP-29 -B SIDE-
SUFFIX: -11

Components location list ; next page



DU-318 -A SIDE-
SUFFIX: -11



DU-318 -B SIDE-
SUFFIX: -11



DU-398 -A SIDE-
SUFFIX: -11



DU-398 -B SIDE-
SUFFIX: -11



ENC-100 -A SIDE-
SUFFIX: -11



ENC-100 -B SIDE-
SUFFIX: -11

DVP-29 (1-869-660-11)
---

*:B SIDE

C100	*C4	C567	*D2	C808	*E3	C1017	*B3	C1434	*B4	C2008	*E1	CL1205	B3	D709	B4	IC105	C4	Q1001	C3	R504	*D2	R836	*E3
C101	D4	C568	*D2	C809	*E3	C1020	C4	C1435	A3	C2009	*E1	CL1206	B3	D1100	A2	IC106	*D4	Q1002	C3	R505	E3	R837	*D3
C102	*C4	C569	*E2	C810	*E3	C1021	C4	C1436	*A3	C2010	*E1	CL1207	*B3	D1101	A2	IC107	*D4	Q1700	*A2	R506	E3	R838	*E3
C103	D4	C570	*D2	C811	*E3	C1026	*B3	C1437	A3	C2011	*E1	CL1208	C3	D1102	A2	IC108	*E4	Q1803	E1	R507	E3	R839	*D3
C104	D4	C571	*E2	C812	*E3	C1027	*B3	C1438	*A3	C2012	*D1	CL1209	C3	D1103	A2	IC109	*C4	Q1805	F1	R508	E3	R840	*D3
C105	C4	C572	*E2	C813	*E3	C1030	C4	C1439	*C4	C2013	*D1	CL1210	C3	D1104	A2	IC200	F4	Q1806	F1	R509	E3	R900	D3
C106	*D4	C573	*D2	C814	*E3	C1031	*C4	C1500	*C1	C2014	*D1	CL1211	C3	D1105	A2	IC201	*F4			R510	D2	R901	*D3
C107	*E4	C574	*D2	C815	*E3	C1032	*C4	C1501	*B1	C2015	*E1	CL1212	C3	D1106	A2	IC202	*F4	R100	*D4	R511	D2	R902	D3
C108	*E4	C575	*D2	C816	*E3	C1033	C4	C1502	*B1	C2016	*E1	CL1300	*B2	D1107	A2	IC203	*F4	R101	*D4	R512	D2	R903	D3
C109	*D4	C577	*D2	C817	*E3	C1034	*B3	C1503	*C1	C2017	*D1	CL1301	*B3	D1400	C1	IC300	D2	R102	*D4	R513	D2	R904	D3
C110	*C4	C578	*E2	C818	*E3	C1035	*C3	C1504	*C1	C2018	*D1	CL1302	B2	D1500	B2	IC301	*D3	R103	*E4	R514	D2	R905	D3
C111	*C4	C579	*D2	C819	*E3	C1300	*B3	C1505	*B1	C2019	*D1	CL1303	*B3	D1501	C1	IC302	*D3	R104	*E4	R515	D2	R906	D3
C112	*C4	C580	*E2	C820	*E3	C1301	*B3	C1506	*C1	C2020	*D1	CL1304	*B2	D2000	*E1	IC500	*E2	R105	*D4	R516	D2	R907	*D3
C113	E4	C581	*E2	C821	*E3	C1302	*B3	C1507	*C1	C2021	*D1	CL1305	*B3			IC501	*E2	R106	*D4	R517	D2	R908	D3
C114	F4	C582	*E2	C822	*E3	C1308	*B3	C1508	*C1	C2022	*D1	CL1306	B2	E1700	B1	IC502	*E2	R110	*C4	R518	D2	R909	D3
C115	*E4	C583	*E2	C823	*E3	C1309	*B3	C1509	*C1	C2023	*E1	CL1307	*B3	E1701	A4	IC600	C3	R111	*C4	R519	D2	R910	D3
C116	*C4	C600	*C3	C824	*E3	C1310	*B3	C1510	*C1	C2024	*E1	CL1500	C1	E1702	D1	IC601	E3	R112	*D4	R520	*E2	R911	C3
C117	*C4	C601	*C2	C825	*E3	C1311	*B3	C1511	*C1	C2025	*E1	CL1501	B1	E1703	F3	IC602	*C2	R113	*D4	R521	E2	R912	*D3
C118	*C4	C602	*C3	C826	*E3	C1312	*B3	C1512	*B1	C2026	*E1	CL1502	D1	E1704	*B1	IC603	C2	R114	*D4	R522	E2	R913	*D3
C200	*F4	C603	*C3	C827	*E3	C1313	*B3	C1513	*B1	C2027	*D1	CL1503	C1	E1705	*A4	IC604	C2	R115	C4	R523	E2	R914	*D3
C201	F4	C604	*D3	C828	*E3	C1314	*B3	C1514	*C1	C2028	*D1	CL1504	D1	E1706	*D1	IC700	B4	R116	C4	R524	E2	R915	D3
C202	*F4	C605	*C2	C829	*F3	C1315	*B3	C1515	*C1	C2029	*D1	CL1505	D1	E1707	*F3	IC800	E3	R117	C4	R525	D2	R916	D3
C204	*F4	C606	*E2	C830	*E4	C1316	*B3	C1516	*C1	C2030	*E1	CL1506	C1			IC803	F3	R119	*E4	R528	*D2	R917	C3
C205	F4	C607	*E3	C831	*F3	C1317	*B3	C1517	*D1			CL1507	D1	FB100	*D4	IC804	E4	R120	C4	R529	*E3	R918	D3
C206	F4	C608	*F3	C832	*E4	C1318	*B3	C1518	*C1	CL100	*D4	CL1603	B2	FB101	*C4	IC805	*E3	R121	D4	R530	D2	R919	D3
C207	F4	C609	*F3	C833	*F3	C1319	*B3	C1519	*D1	CL101	*D4	CL1604	B2	FB102	*E4	IC900	D3	R122	D4	R531	*E2	R920	D3
C208	F4	C610	*E2	C834	*E4	C1320	*B3	C1520	*C1	CL102	*E4	CL1605	B2	FB500	*D2	IC903	D4	R125	*E4	R532	*E3	R921	D3
C209	*F4	C611	*E3	C835	*F3	C1321	*A2	C1521	*C1	CL103	*E4	CL1607	B2	FB501	*D2	IC904	C3	R127	D4	R600	*C3	R922	*D3
C210	*F4	C612	*F2	C836	*E4	C1322	*A3	C1522	*D1	CL300	E2	CL1608	B2	FB502	*D2	IC1000	B4	R128	*D4	R601	*C2	R923	D3
C211	*F4	C613	*E3	C837	*E3	C1323	*B3	C1523	*D1	CL301	D3	CL1800	*F1	FB503	*D2	IC1001	C4	R129	D4	R602	C2	R924	D3
C212	*F4	C614	*E3	C838	*E4	C1324	*A3	C1524	*C1	CL302	E3	CL1801	*F1	FB504	*E3	IC1002	*B3	R130	*D4	R603	C2	R925	D4
C214	*F4	C615	*C2	C839	*F4	C1325	*A3	C1525	*C1	CL303	E2	CL1900	E1	FB505	*E3	IC1003	*B3	R131	*C4	R604	C2	R926	D3
C215	*F4	C616	*C2	C840	*E4	C1326	*B3	C1526	*C1	CL304	E3	CL1901	E1	FB506	*E2	IC1004	*B3	R138	*C4	R605	C3	R927	D4
C300	*D3	C617	C3	C841	*E3	C1327	*A3	C1527	B1	CL305	E3	CL1903	E1	FB600	*C3	IC1005	C4	R139	*C4	R606	C3	R928	D3
C301	*D3	C700	*B4	C900	D3	C1328	*B3	C1528	B1	CL306	E3	CL1904	E1	FB601	*C2	IC1006	*B3	R140	*C4	R607	C2	R929	*D3
C500	*E2	C701	*B4	C901	D3	C1329	*B3	C1529	B1	CL310	E3	CL1905	D1	FB602	*E3	IC1009	C4	R141	*C4	R608	*E3	R930	*D3
C501	*D2	C702	*B4	C902	*D3	C1330	*B3	C1530	*C1	CL311	E3	CL1906	D1	FB603	*E3	IC1010	C4	R142	*C4	R609	C3	R931	*D3
C502	*D2	C703	*B4	C903	*D3	C1331	*B3	C1700	*A2	CL312	E2	CL1907	D2	FB604	*C3	IC1100	B3	R143	C4	R700	B4	R932	D3
C503	*D2	C704	*B4	C905	*D3	C1332	*B3	C1701	C3	CL313	E2	CL1908	D2	FB700	*C4	IC1400	B2	R200	*F4	R701	*B4	R933	D3
C504	*D2	C705	*B4	C907	*D3	C1333	*B3	C1702	*B2	CL314	E2	CL1909	*D1	FB701	*C4	IC1401	*B1	R202	*F4	R702	*B4	R934	D3
C505	*E2	C706	*B4	C908	*D3	C1334	*B3	C1703	*E4	CL402	*D2	CL1910	D2	FB800	*E3	IC1402	A3	R203	*F4	R703	*C4	R1000	*B4
C513	*E2	C707	*B4	C909	*D3	C1335	*B3	C1704	*D4	CL403	*D2	CL1911	D2	FB801	*E3	IC1403	*A3	R204	*F4	R705	C4	R1001	*C4
C514	*D2	C708	*B4	C910	*D3	C1336	*B3	C1705	*A2	CL404	*D2	CL1912	E2	FB802	*E3	IC1404	A4	R205	*F4	R706	C4	R1002	C3
C515	*D2	C709	*B4	C911	*D3	C1337	*B2	C1706	*A2	CL405	*D2	CL2000	D1	FB803	*F3	IC1405	*A4	R206	*F4	R707	*C4	R1003	C3
C516	*D2	C710	*B4	C912	*D3	C1338	*B3	C1707	*E4	CL406	*D2	CL2002	D1	FB804	*E4	IC1406	B4	R207	*F4	R708	B4	R1005	C4
C517	E2	C711	*B4	C913	*D3	C1339	*B2	C1708	*D4	CL407	*E2	CL2003	D1	FB805	*F4	IC1407	*A4	R208	F4	R709	B4	R1006	C4
C519	*E2	C712	*B4	C914	*D3	C1340	*B2	C1709	*A2	CL413	D3	CL2004	D1	FB806	*E4	IC1408	A3	R209	*F4	R710	C4	R1007	C3
C520	*D2	C713	*B4	C915	*D3	C1341	*B3	C1710	*A2	CL414	D3	CL2005	D1	FB807	*F4	IC1409	*A3	R210	*F4	R711	C4	R1008	*B3
C521	*D2	C714	*B4	C916	*D3	C1342	*B2	C1711	*A2	CL415	D3	CL2006	D1	FB808	*E4	IC1410	*C4	R211	*F4	R712	C4	R1009	*B3
C522	*E2	C715	*B4	C917	*D3	C1343	*B2	C1712	*B2	CL416	D3	CL2007	D1	FB809	*E3	IC1500	C1	R212	F4	R713	C4	R1010	C4
C523	*D2	C716	*B4	C918	*D3	C1344	*B3	C1713	*D4	CL501	E2	CL2008	D1	FB900	*D3	IC1501	C1	R213	*F4	R714	C4	R1011	C4
C524	*E2	C717	*B4	C919	*D3	C1345	*B3	C1714	C3	CL700	B4	CL2009	E1	FB901	*D3	IC1502	*C1	R214	F4	R715	C4	R1020	C4
C525	*E2	C718	*B4	C920	*D3	C1346	*B3	C1715	*B2	CL701	C4	CL2010	E1	FB902	*D3	IC1503	B1	R215	F4	R716	C4	R1022	*C4
C526	*D2	C719	*B4	C921	*D3	C1347	*B3	C1718	C3	CL702	C4	CL2011	E1	FB903	*D4	IC1504	*C1	R216	*F4	R717	B4	R1023	*C4
C527	*D2	C720	*B4	C922	*D3	C1348	*B3	C1719	C3	CL703	B4	CL2012	E1	FB904	*C4	IC1700	*A2	R217	*F4	R718	B4	R1024	*C4
C528	*D2	C721	*B4	C923	*D3	C1349	*B3	C1720	C3	CL704	B4	CL2013	E1	FB905	*D4	IC1701	*B2	R218	F4	R719	B4	R1025	C4
C529	*D2	C722	*B4	C924	*D3	C1350	*A3	C1721	*E4	CL705	B4	CL2014	E1	FB906	*C3	IC1702	*E4	R219	F4	R720	B4	R1026	C4
C530	*D2	C723	*B4	C925	*D3	C1400	B1	C1802	F1	CL800	E3	CL2015	E1	FB907	*D4	IC1703	*D4	R220	*F4	R800	E3	R1027	C4
C531	*D2	C724	*B4	C926	*D3	C1401	*B1	C1804	*F1	CL801	E3			FB908	*C3	IC1709	C3	R221	F4	R803	E3	R1028	C4
C532	*D2	C725	*B4	C927	*D3	C1402	B1	C1805	F1	CL802	E3	CN100	D4	FB1000	C4	IC1710	C3	R222	F4	R804	D4	R1029	*B3
C533	*D2	C726	*C4	C928	*D3	C1403	*B1	C1809	E1	CL803	E3	CN1400	*B4	FB1001	C4	IC1711	C3	R223	*F4	R805	D4	R1100	*A2
C534	*D2	C727	*C4	C929	*D4	C1404	A3	C1810	F1	CL804	D4	CN1401	C1	FB1002	*C3	IC1712	C3	R302	*E2	R806	E3	R1101	*A2
C535	*D2	C728	B4	C930	*C3	C1405	*A3	C1812	F1	CL805	E3	CN1500	*C1	FB1300	*B3	IC1802	F1	R303	*E2	R807	D4	R1102	*A2
C536	*D2	C729	*B4	C931	*D4	C1406	A3	C1813	F1	CL806	E3	CN1600	B2	FB1301	*B2	IC1803	*F1	R304	E3	R808	E3	R1103	*A2
C537	*E2	C730	*B4	C932	*C3	C1407	*A3	C1900	*E2	CL807	E3	CN1800	*E1	FB1302	*B3	IC1804	F1	R305	E3	R809	E3	R1104	*A2
C538	*E2	C731	*B4	C933	*D4	C1408	A3	C1901	*E1	CL808	E3	CN2100	E2	FB1303	*B3	IC1806	F1	R306	*D3	R810	E4	R1105	*A2
C540	*E3	C732	*B4	C934	*C3	C1409	*A3	C1902	*D1	CL809	E3	CN2101	A4	FB1304	*A3	IC1807	F1	R307	*D3	R811	E3	R1106	*A2
C541	*D3	C733	*B4	C935	*D4	C1410	*A3	C1903	*D1	CL810	E3			FB1305	*B3	IC1900	D1	R308	*D3	R812	E3	R1107	*A2
C542	*D3	C734	*B4	C936	*D3	C1411	A3	C1904	E2	CL811	E3	D200	*F4	FB1306	*B3	IC1901	*D2	R309	*E3	R813	E4	R1108	*B3
C543	*D2	C735	*B4	C937	*D4	C1412	*A3	C1905	E1	CL812	E3	D201	*F4	FB1500	*B1	IC1902	E1	R310	*E3	R814	E4	R1109	B3
C544	*E3	C736	*B4	C938	*C3	C1413	A3	C1906	E1	CL813	E3	D202	*F4	FB1501	*C1	IC1903	E1	R311	*E3	R815	D4	R1110	B3
C545	*E3	C737	*B4	C939	*D4	C1414	*A3	C1907	E2	CL900	D3	D203	*F4	FB1502	B1	IC1904	*E1	R312	*D3	R816	D4	R1111	B3
C546	*E3	C738	*B4	C940	*C3	C1415	*A4	C1908	*E2	CL901	D3	D204	*F4	FB1700	C3	IC1905	D2	R313	*D3	R817	E3	R1112	B3
C547	*D2	C739	*B4	C941	D3	C1416	*A4	C1909	*E2	CL902	D3	D205	F4	FB1701	*A2	IC1906	*E1	R314	D2	R818	E3	R1113	B3
C548	*E3	C740	*B4	C1000	*B4	C1417	*A4	C1910	*F1	CL903	D3	D400	E2	FB1703	F4	IC1907	*E1	R315	D2	R819	D4	R1114	B3
C549	*E2	C741	*B4	C1001	*B3	C1418	*A4	C1911	E2	CL904	D3	D401	E2	FB1704	F4	IC1908	*E1	R316	D2	R820	E3	R1115	B3
C550	*E2	C742	*B4	C1002	*B3	C1419	*A4	C1912	D2	CL905	D3	D402	E2	FB1705	F4	IC1909	C2	R400	*E2	R821	D4	R1116	B3
C551	*E2	C743	*B4	C1003	*B4	C1420	*A4	C1913	*E1	CL906	D3	D403	E2	FB1706	E4	IC1910	C2	R401	*E2	R822	E3	R1117	B3
C552	*E2	C744	*B4	C1004	*B4	C1421	A4	C1914	*E1	CL907	D3	D404	E2	FB1707	F4	IC1911	C2	R402	*E2	R823	D4	R1118	B3
C553	*E2	C745	*B4	C1005	*B3	C1422	*A4	C1915	*E1	CL908	D3	D405	E2	FB1708	F4			R403	*E2	R824	E3	R1119	B3
C554	E2	C746	*B4	C1006	*B4	C1423	A4	C1916	C2	CL1000	B4	D406	E2	FB1709	C3	L100	*C4	R404	*E2	R825	E3	R1120	B3
C555	E2	C747	*B4	C1007	*B3	C1424	*A4	C1917	C2	CL1001	C4	D407	E2	FB1710	C3	L700	B4	R405	*E2	R826	E3	R1121	*A3
C556	*E2	C748	B4	C1008	*C3	C1425	B4	C1918	C2	CL1100	A3	D700	B4	FB1801	F1	L1000	C4	R406	*E2	R827	E3	R1122	*A3
C558	D2	C749	*B4	C1009	*B3	C1426	A4	C2000	*D1	CL1101	A3	D701	B4	FB1900	*D1	L1700	*B2	R407	*E2	R828	E4	R1123	*A3
C559	*D2	C752	*B4	C1010	*B3	C1427	B4	C2001	*D1	CL1102	A3	D702	B4	FB1901	C2	L1701	*E4	R408	*D2	R829	E3	R1124	*A3
C560	*D2	C800	E3	C1011	*B4	C1428	A4	C2002	*D1	CL1103	A3	D703	B4			L1702	*D4	R409	*D2	R830	E4	R1200	*B3
C562	*D2	C801	D4	C1012	*B3	C1429	B3	C2003	*D1	CL1200	*B2	D704	B4	IC100	D4	L1800	E1	R410	*D2	R831	*E3	R1201	*B2
C563	*D2	C802	*E3	C1013	*B4	C1430	A4	C2004	*D1	CL1201	B3	D705	B4	IC101	*C4			R500	*D2	R832	*E3	R1202	B2
C564	*D2	C803	*E3	C1014	*B4	C1431	A4	C2005	*D1	CL1202	B3	D706	B4	IC102	*C4	Q200	F4	R501	*D2	R833	*E3	R1215	A3
C565	*D2	C805	*E3	C1015	*C3	C1432	*B4	C2006	*D1	CL1203	B3	D707	B4	IC103	D4	Q201	F4	R502	*D2	R834	*E3	R1216	*B3
C566	*D3	C807	*E3	C1016	*B3	C1433	A4	C2007	*D1	CL1204	B3	D708	B4	IC104	D4	Q1000	C3	R503	*D2	R835	*E3	R1217	*B3

R836	*E3	R1218	*B3	R1520	C1	R1812	*E1	RB114	*E4														
R837	*D3	R1219	*B3	R1521	D1	R1813	*F1	RB115	*E4														
R838	*E3	R1300	*B2	R1522	C1	R1814	*F1	RB400	D2														
R839	*D3	R1301	*B2	R1523	D1	R1815	*F1	RB401	D2														
R840	*D3	R1302	*B2	R1524	D1	R1816	*E1	RB402	D1														
R900	D3	R1303	*B3	R1525	D1	R1817	F1	RB403	D2														
R901	*D3	R1304	*B2	R1526	D1	R1818	*E1	RB404	D2														
R902	D3	R1305	A3	R1527	D1	R1819	*F1	RB405	D2														
R903	D3	R1306	A3	R1528	C1	R1820	*F1	RB700	*B4														
R904	D3	R1307	A3	R1529	D1	R1821	F1	RB701	*B4														
R905	D3	R1308	A3	R1530	D1	R1822	*F1	RB702	*B4														
R906	D3	R1309	A3	R1531	D1	R1827	F1	RB703	B4														
R907	*D3	R1310	*B2	R1532	C1	R1828	F1	RB704	B4														
R908	D3	R1311	*B2	R1533	C1	R1829	F1	RB705	B4														
R909	D3	R1312	*B3	R1534	D1	R1830	F1	RB706	B4														
R910	D3	R1313	B2	R1535	C1	R1831	F1	RB707	B4														
R911	C3	R1314	*B3	R1536	C1	R1832	F1	RB708	B4														
R912	*D3	R1315	B3	R1537	D1	R1833	F1	RB709	B4														
R913	*D3	R1316	B3	R1538	D1	R1835	F1	RB710	B4														
R914	*D3	R1317	*B3	R1539	*C1	R1836	F1	RB711	*B4														
R915	D3	R1318	*B3	R1540	*C1	R1837	F1	RB712	*B4														
R916	D3	R1319	*B3	R1541	*C1	R1838	F1	RB800	D3														
R917	C3	R1320	*B3	R1542	*C1	R1900	*E1	RB801	E3														
R918	D3	R1321	*B3	R1543	B1	R1901	*D2	RB802	D3														
R919	D3	R1322	B3	R1544	B1	R1902	*D2	RB803	D3														
R920	D3	R1323	B2	R1545	*D1	R1903	*D2	RB900	D3														
R921	D3	R1324	B3	R1546	*D1	R1904	*E2	RB901	D3														
R922	*D3	R1325	B3	R1547	B1	R1905	*D2	RB902	D3														
R923	D3	R1326	B3	R1548	*C1	R1907	E1	RB903	D3														
R924	D3	R1327	*B2	R1549	*C1	R1908	*E1	RB1000	B3														
R925	D4	R1328	*B2	R1550	*C1	R1909	*E1	RB1001	B3														
R926	D3	R1329	*B2	R1551	*C1	R1910	*D1	RB1002	B3														
R927	D4	R1330	*B3	R1552	C1	R1911	*E1	RB1003	B3														
R928	D3	R1331	*B3	R1553	D1	R1912	*D1	RB1004	B4														
R929	*D3	R1400	*A1	R1554	D1	R1913	E1	RB1005	B4														
R930	*D3	R1401	*B1	R1555	*C1	R1914	E1	RB1006	B4														
R931	*D3	R1402	*A1	R1556	*C1	R1915	E1	RB1007	B4														
R932	D3	R1403	*A1	R1557	*C1	R1916	E1	RB1008	B3														
R933	D3	R1404	*B1	R1558	D1	R1917	E1	RB1009	B3														
R934	D3	R1405	*B1	R1559	*C1	R1918	D1	RB1010	C3														
R1000	*B4	R1406	*B1	R1600	C2	R1919	D1	RB1011	C3														
R1001	*C4	R1407	*B2	R1601	C2	R1920	D1	RB1012	B4														
R1002	C3	R1408	*B1	R1602	B2	R1921	D1	RB1013	B4														
R1003	C3	R1409	*B1	R1603	*B2	R1922	D1	RB1014	C4														
R1004	C3	R1410	*B1	R1604	*B2	R1923	D1	RB1015	C4														
R1005	C4	R1411	*B1	R1605	*B2	R1924	D1	RB1100	*A3														
R1006	C4	R1412	*B1	R1700	*B2	R1925	D1	RB1400	B2														
R1007	C3	R1413	*B1	R1701	*E4	R1926	D1	RB1401	B1														
R1008	*B3	R1414	*B1	R1702	*D4	R1928	D1	RB1402	B1														
R1009	*B3	R1415	*B1	R1703	*A2	R1930	E2	RB1403	B1														
R1010	C4	R1416	*B1	R1704	*A2	R1931	D1	RB1500	C1														
R1011	C4	R1417	*B2	R1705	*A2	R1932	E2	RB1502	*C1														
R1022	*C4	R1418	B1	R1706	*A2	R1933	E2	RB2000	D1														
R1023	*C4	R1419	A3	R1707	*A2	R1935	E1																
R1024	*C4	R1420	*A3	R1708	*A2	R1936	E1	S1500	*C1														
R1025	C4	R1421	A4	R1709	*A2	R1937	E1	S1900	E1														
R1026	C4	R1422	*A4	R1710	*E4	R1938	*D2																
R1027	C4	R1423	A4	R1711	*E4	R1939	*D2	X1500	B1														
R1028	C4	R1424	*B4	R1712	*E4	R1940	*E1	X1700	C3														
R1029	*B3	R1425	C1	R1715	C3	R1941	*E1																
R1100	*A2	R1426	*C4	R1716	*A2	R1942	C2																
R1101	*A2	R1427	*C4	R1717	*A2	R1943	E1																
R1102	*A2	R1428	*C4	R1718	*A2	R1944	E2																
R1103	*A2	R1429	C1	R1719	*A2	R1945	*E1																
R1104	*A2	R1430	*C4	R1720	*B2	R1946	*E1																
R1105	*A2	R1431	*C4	R1721	*B2	R1947	*D2																
R1106	*A2	R1432	*C4	R1722	*B2	R2000	E1																
R1107	*A2	R1433	*C4	R1723	*B2	R2001	E1																
R1108	*B3	R1434	*C4	R1724	*D4	R2004	D1																
R1109	B3	R1435	*C4	R1725	*D4	R2005	D1																
R1110	B3	R1436	*C4	R1726	*D4	R2006	D1																
R1111	B3	R1500	B2	R1727	*D4	R2007	D1																
R1112	B3	R1501	C1	R1728	*D4	R2100	E2																
R1113	B3	R1502	C1	R1730	C3	R2101	*B4																
R1114	B3	R1503	C1	R1731	C3	R2102	*B4																
R1115	B3	R1504	B1	R1732	C3	R2103	*A4																
R1116	B3	R1505	C1	R1733	*B2																		
R1117	B3	R1506	C1	R1734	*A2	RB100	*D4																
R1118	B3	R1507	C2	R1738	*E4	RB101	*D4																
R1119	B3	R1508	B1	R1739	C3	RB102	*D4																
R1120	B3	R1509	B1	R1740	*E4	RB103	*D4																
R1121	*A3	R1510	C1	R1800	F1	RB104	*C4																
R1122	*A3	R1511	C1	R1801	*F1	RB105	*C4																
R1123	*A3	R1512	C1	R1802	*F1	RB106	C4																
R1124	*A3	R1513	C2	R1803	*F1	RB107	*E4																
R1200	*B3	R1514	C1	R1804	F1	RB108	*E4																
R1201	*B2	R1515	C2	R1805	*F1	RB109	*E4																
R1202	B2	R1516	C2	R1807	E1	RB110	*E4																
R1215	A3	R1517	C1	R1808	E1	RB111	*D4																
R1216	*B3	R1518	C1	R1809	F1	RB112	*D4																
R1217	*B3	R1519	C1	R1811	*F1	RB113	*D4																

5-8 5-8 PDW-F330/V2 (J

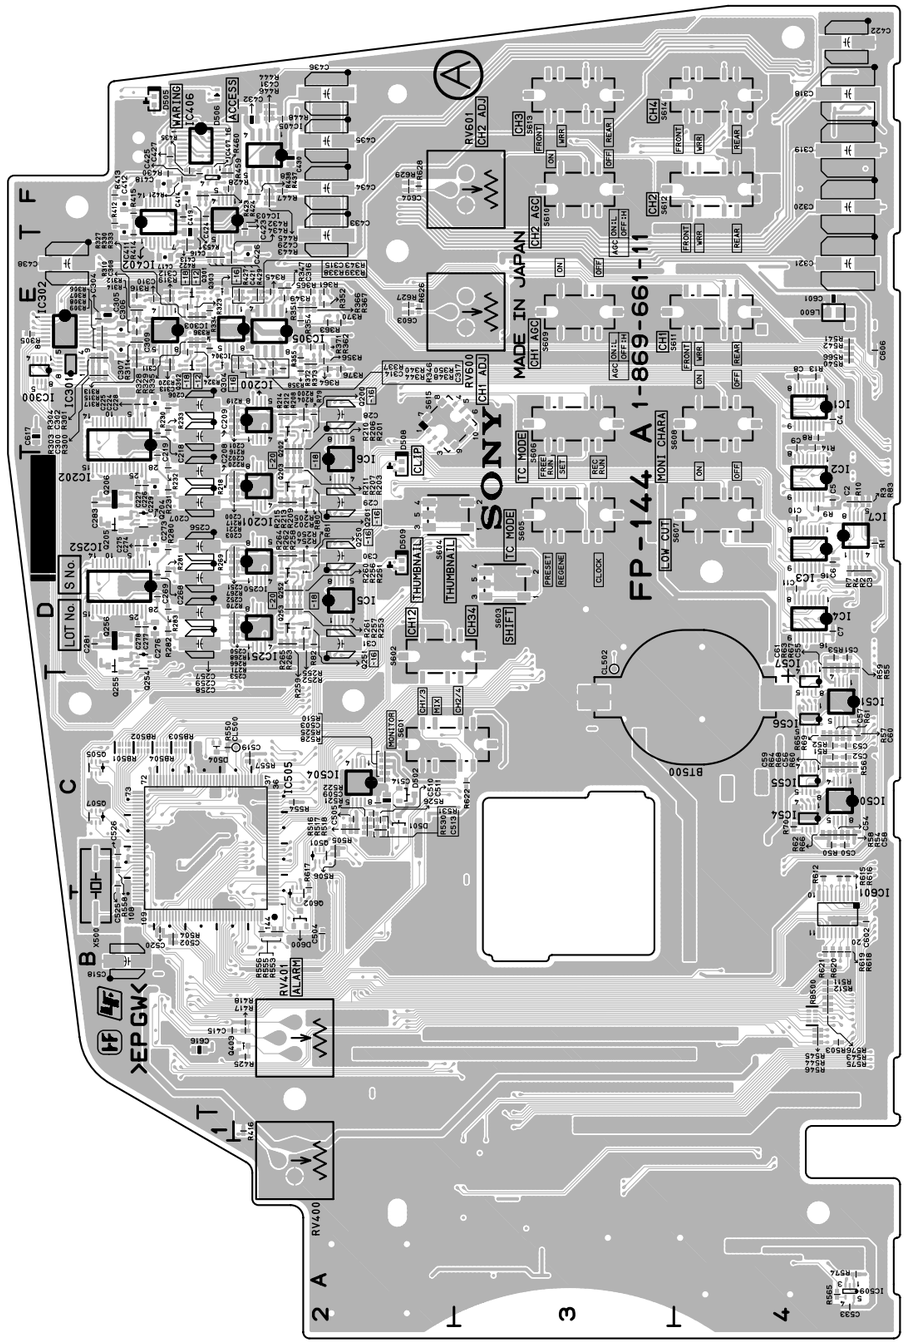

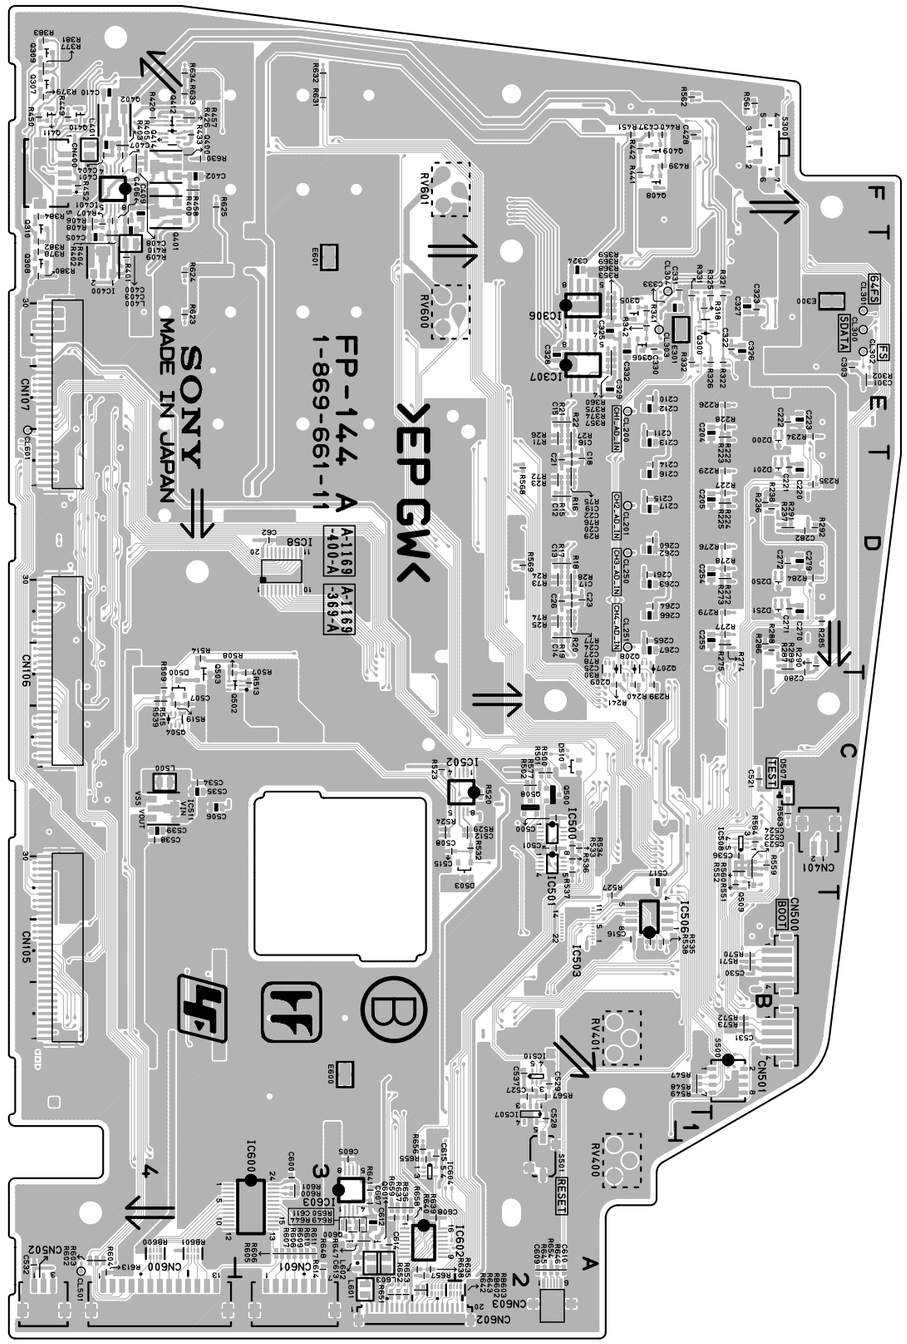

Components location list ; next page

FP-144A -A SIDE-
SUFFIX: -11

FP-144A -B SIDE-
SUFFIX: -11

FP-144A, GCN-17, HP-124, IO-228

FP-144A (1-869-661-11)
---

*:B SIDE

BT500	C4	C266	*D2	C501	*C2	D502	C2	Q254	D1	R78	*D2	R300	E1	R406	*F4	R543	B4	R656	*A3
		C267	*D2	C502	B1	D503	*C2	Q255	D1	R79	E2	R301	E1	R407	*F4	R544	B4	R657	*A3
C2	D4	C268	D1	C503	C2	D504	C1	Q256	D1	R80	D2	R302	*E1	R408	*F4	R545	B4	R658	*A3
C3	D4	C269	D1	C504	B2	D505	F1	Q300	*E1	R81	D2	R303	E1	R409	*F4	R546	B4	R659	*A3
C4	E4	C270	*D1	C505	C2	D506	F1	Q301	E1	R82	D2	R304	E1	R410	*F4	R547	*B1		
C5	D4	C271	*D1	C506	*C4	D507	*C1	Q302	E1	R83	D4	R305	E1	R412	F1	R548	*B1	RB500	B4
C6	D4	C272	*D1	C507	*C4	D508	D2	Q303	E1	R200	E2	R306	E1	R413	F1	R549	*B1	RB501	C1
C7	D4	C273	D1	C508	*C3	D509	D2	Q304	E1	R201	E2	R307	E1	R414	E1	R550	C1	RB502	C1
C8	E4	C274	D1	C509	C2	D510	*C2	Q305	*E2	R202	D2	R308	E1	R415	F1	R551	*C1	RB503	C1
C9	E4	C275	D1	C510	C2	D600	B2	Q306	*E2	R203	D2	R309	E1	R416	A2	R552	*C1	RB504	C1
C10	D4	C276	D1	C511	C2			Q307	*F4	R204	E2	R310	E1	R417	B2	R553	B2	RB600	*A4
C11	D4	C277	D1	C512	*C2	E300	*E1	Q308	*E4	R205	D2	R311	E1	R418	B2	R554	C2	RB601	*A4
C12	*D2	C278	D1	C513	C2	E301	*E1	Q309	*F4	R206	E2	R312	E1	R420	*F4	R555	B2	RB602	*A3
C13	*D2	C279	*D1	C514	C2	E600	*B3	Q310	*F4	R207	D2	R313	E1	R421	F1	R556	B2	RB603	*A2
C14	*D2	C280	*C1	C515	*C3	E601	*E3	Q400	*F4	R208	E2	R314	E1	R422	E1	R557	C2		
C15	*E2	C281	D1	C516	*B2			Q401	*F4	R209	D2	R315	E1	R423	F1	R558	C1	RV400	A2
C16	*E2	C282	*D1	C517	*C2	IC1	E4	Q402	*F4	R210	E2	R316	E1	R424	F1	R559	*C1	RV401	B2
C17	*D2	C283	D1	C518	B1	IC2	D4	Q403	B2	R211	D2	R317	E1	R425	B2	R560	*C1	RV600	E3
C18	*D2	C300	E1	C519	C2	IC3	D4	Q408	*F2	R212	E2	R318	*E1	R426	*F4	R561	*F1	RV601	F3
C19	*D2	C301	*E1	C520	B1	IC4	D4	Q409	*F2	R213	D2	R319	E1	R427	E1	R562	*F1		
C20	*D2	C302	E1	C521	*C1	IC5	D2	Q410	*F4	R214	E2	R320	E1	R428	F1	R563	*C1	S300	*F1
C21	*D2	C303	*E1	C522	*C1	IC6	D2	Q411	*F4	R215	D2	R321	*E1	R429	E1	R564	*C1	S500	*B1
C22	*D2	C304	E1	C523	*C1	IC7	D4	Q412	*F4	R216	E2	R322	*E1	R430	F1	R565	A4	S501	*A2
C23	*D2	C305	E1	C524	*C1	IC50	C4	Q414	*F4	R217	D2	R323	E1	R432	E1	R566	E4	S601	C2
C24	*D2	C306	E1	C525	C1	IC51	C4	Q500	*C2	R218	D2	R324	E1	R433	*F4	R567	*B2	S602	D2
C25	*D2	C307	E1	C526	C1	IC54	C4	Q501	C2	R219	E2	R325	*E1	R434	E1	R568	*D2	S603	D3
C26	*D2	C308	E1	C527	*B2	IC55	C4	Q502	*C4	R220	E2	R326	*E1	R435	F1	R569	*D2	S604	D2
C27	*D2	C309	E1	C528	*A2	IC56	C4	Q503	*C4	R221	D2	R327	E1	R437	F2	R570	*B1	S605	D3
C28	E2	C310	E1	C529	*B2	IC57	C4	Q504	*C4	R222	*E1	R328	E1	R438	F2	R571	*B1	S606	E3
C29	D2	C311	E1	C530	*B1	IC58	*D3	Q505	C1	R223	*E1	R329	E1	R439	*F2	R572	*B1	S607	D4
C30	D2	C312	E1	C531	*B1	IC200	E2	Q507	C1	R224	*D1	R330	E1	R440	*F2	R573	*B1	S608	E4
C31	D2	C313	E1	C532	*A4	IC201	D2	Q508	*C2	R225	*D1	R331	*E1	R441	*F2	R574	A4	S609	E3
C50	C4	C314	E2	C533	A4	IC202	E1	Q509	*C1	R226	*E1	R332	*E1	R442	*F2	R575	B4	S610	F3
C51	D4	C315	E2	C534	*C4	IC250	D2	Q600	*A3	R227	*D1	R333	E1	R443	F2	R576	B4	S611	E4
C52	C4	C316	E2	C535	*C4	IC251	D2	Q601	*A3	R228	*E1	R334	E1	R444	F2	R577	*C2	S612	F4
C53	C4	C317	E2	C536	*C1	IC252	D1	Q602	B2	R229	*D1	R335	E1	R445	F2	R600	*A3	S613	F3
C54	C4	C318	F4	C537	*B2	IC300	E1			R230	E1	R336	E1	R446	F2	R601	*A3	S614	F4
C55	D4	C319	F4	C538	*C4	IC301	E1	R1	D4	R231	D1	R337	E2	R447	F2	R602	*A4	S615	E2
C56	C4	C320	F4	C539	*C4	IC302	E1	R2	D4	R232	D1	R338	E2	R448	F2	R603	*A4		
C57	C4	C321	E4	C600	*A3	IC303	E1	R3	D4	R233	E1	R339	E2	R449	*F4	R604	*A4	X500	C1
C58	C4	C322	*E1	C601	E4	IC304	E2	R4	D4	R234	*E1	R340	E2	R450	*F4	R605	*A3		
C59	C4	C323	*E1	C602	B4	IC305	E2	R7	D4	R235	*D1	R341	*E2	R451	*F2	R606	*A3		
C60	C4	C324	*E2	C603	E2	IC306	*E2	R8	E4	R236	*D1	R342	*E2	R452	*F4	R607	*A3		
C61	D4	C325	*E2	C604	F2	IC307	*E2	R9	D4	R237	*D1	R343	E2	R453	F1	R608	*A3		
C62	*D3	C326	*E1	C605	*A3	IC400	*E4	R10	D4	R238	*D1	R344	E2	R457	*F4	R609	*A3		
C200	D2	C327	*E1	C606	E4	IC401	*F4	R13	E4	R239	*C2	R345	E2	R458	*F4	R610	*A3		
C201	E2	C328	*E2	C607	*A3	IC402	E1	R14	E4	R240	*C2	R346	E2	R459	F1	R611	*A3		
C202	E2	C329	*E2	C608	*A3	IC403	F1	R15	*D2	R241	*C2	R347	E2	R460	F1	R612	C4		
C203	D2	C330	*E2	C609	*A2	IC405	F2	R16	*D2	R250	D2	R348	E2	R500	*C2	R613	*A4		
C204	*E1	C331	*E1	C610	*A2	IC406	F1	R17	*D2	R251	D2	R349	E2	R501	*C2	R614	*A3		
C205	*D1	C332	*E2	C611	*A3	IC407	F1	R18	*D2	R252	D2	R350	E2	R502	*C2	R615	C4		
C206	E1	C333	*E2	C612	*A3	IC500	*C2	R19	*D2	R253	D2	R351	E2	R503	B4	R616	C4		
C207	D1	C400	*F4	C613	*A3	IC501	*C2	R20	*D2	R254	D2	R352	E2	R504	B1	R617	C2		
C208	D1	C401	*F4	C614	*A3	IC502	*C2	R21	*E2	R255	D2	R353	*E2	R505	C2	R618	B4		
C209	E1	C402	*F4	C615	*A3	IC503	*B2	R22	*E2	R256	D2	R354	E2	R506	C2	R619	B4		
C210	*E2	C403	*F4	C616	B1	IC504	C2	R23	*D2	R257	D2	R355	E2	R507	*C3	R620	B4		
C211	*E2	C404	*F4	C617	E1	IC505	C1	R24	*D2	R258	D2	R356	E2	R508	*C4	R621	B4		
C212	*E2	C405	*E4			IC506	*B2	R25	*D2	R259	D2	R357	*E2	R509	*C4	R622	C3		
C213	*E2	C406	*F4	CL200	*E2	IC507	*A2	R26	*E2	R260	D2	R358	E2	R510	C2	R623	*E4		
C214	*D2	C407	*F4	CL201	*D2	IC508	*C1	R27	*E2	R261	D2	R359	*E2	R511	B4	R624	*E4		
C215	*D2	C408	*F4	CL250	*D2	IC509	A4	R28	*D2	R262	D2	R360	*E2	R512	B4	R625	*F4		
C216	*D2	C409	*F4	CL251	*D2	IC510	*B2	R29	*D2	R263	D2	R361	E2	R513	*C3	R626	E2		
C217	*D2	C410	*F4	CL300	*E1	IC511	*C4	R30	*D2	R264	D2	R362	E2	R514	*D4	R627	E2		
C218	E1	C411	E1	CL301	*E1	IC600	*A4	R50	C4	R265	D2	R363	E2	R515	*C4	R628	F2		
C219	D1	C412	F1	CL302	*E1	IC601	B4	R51	C4	R266	D2	R364	E2	R516	C2	R629	F2		
C220	*D1	C413	E1	CL303	*E2	IC602	*A3	R52	C4	R267	D2	R365	E2	R517	C2	R630	*F4		
C221	*D1	C414	F1	CL304	*E2	IC603	*A3	R53	D4	R268	D2	R366	E2	R518	C2	R631	*F3		
C222	*E1	C415	B1	CL500	C2	IC604	*A3	R54	C4	R269	D2	R367	E2	R519	*C4	R632	*F3		
C223	*E1	C416	E1	CL501	*A4			R55	D4	R270	D2	R368	*E2	R520	*C2	R633	*F4		
C224	E1	C417	E1	CL502	D3	L400	*E4	R56	C4	R271	D2	R369	*E2	R521	C2	R634	*F4		
C225	E1	C418	F1	CL601	*E4	L401	*F4	R57	C4	R272	*D1	R370	E2	R522	C2	R635	*A3		
C226	D1	C419	F1			L500	*C4	R58	C4	R273	*D1	R371	E2	R523	*C3	R636	*A3		
C227	D1	C421	E1	CN105	*B4	L600	E4	R59	D4	R274	*D1	R372	E2	R524	*C3	R637	*A3		
C228	E1	C422	F4	CN106	*D4	L601	*A3	R60	C4	R275	*D1	R373	E2	R525	C2	R638	*A3		
C229	D1	C423	F2	CN107	*E4	L602	*A3	R61	C4	R276	*D1	R374	*E2	R526	C2	R639	*A3		
C250	D2	C424	F1	CN400	*F4	L603	*A3	R62	C4	R277	*D1	R375	*E2	R527	*B2	R640	*A3		
C251	D2	C425	F1	CN401	*C1			R63	D4	R278	*D1	R376	E2	R528	C2	R641	*A3		
C252	D2	C426	E2	CN500	*B1	Q200	E2	R64	C4	R279	*D1	R377	*F4	R529	*C2	R642	*A3		
C253	D2	C427	F1	CN501	*B1	Q201	D2	R65	C4	R280	D1	R378	*E4	R530	C2	R643	*A3		
C254	*D1	C428	*F1	CN502	*A4	Q202	E2	R66	C4	R281	D1	R379	*F4	R531	C2	R644	*A3		
C255	*D1	C429	F2	CN600	*A4	Q203	D2	R67	D4	R282	D1	R380	*E4	R532	*C2	R645	*A2		
C256	D1	C430	F2	CN601	*A3	Q204	D1	R68	C4	R283	D1	R381	*F4	R533	*C2	R646	*A2		
C257	D1	C431	F2	CN602	*A3	Q205	D1	R69	C4	R284	*D1	R382	*E4	R534	*C2	R647	*A3		
C258	D1	C432	F2	CN603	*A2	Q206	D1	R70	C4	R285	*D1	R383	*F4	R535	*B2	R648	*A3		
C259	D1	C433	E2			Q207	*D2	R71	*E2	R286	*D1	R384	*F4	R536	*C2	R649	*A3		
C260	*D2	C434	F2	D200	*E1	Q208	*D2	R72	*D2	R287	*D1	R400	*F4	R537	*C2	R650	*A3		
C261	*D2	C435	F2	D201	*D1	Q209	*D2	R73	*D2	R288	*D1	R401	*E4	R538	*B2	R651	*A3		
C262	*D2	C436	F2	D250	*D1	Q250	D2	R74	*D2	R289	*D1	R402	*E4	R539	*C4	R652	*A3		
C263	*D2	C437	*F2	D251	*D1	Q251	D2	R75	*E2	R290	*D1	R403	*F4	R540	E4	R653	*A3		
C264	*D2	C438	E1	D500	*C4	Q252	D2	R76	*D2	R291	*D1	R404	*E4	R541	E4	R654	*A2		
C265	*D2	C500	*C2	D501	C2	Q253	D2	R77	*D2	R292	*D1	R405	*F4	R542	E4	R655	*A3		

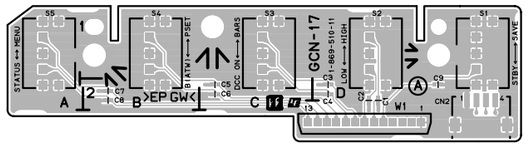

GCN-17 -A SIDE-
SUFFIX: -11

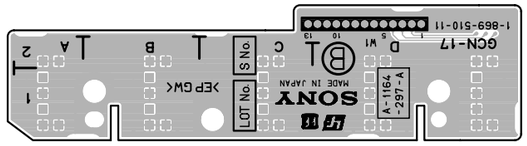

GCN-17 -B SIDE-
SUFFIX: -11



HP-124 -A SIDE-
SUFFIX: -11



HP-124 -B SIDE-
SUFFIX: -11



IO-228 -A SIDE-
SUFFIX: -11

IO-228 -B SIDE-
SUFFIX: -11

5-10

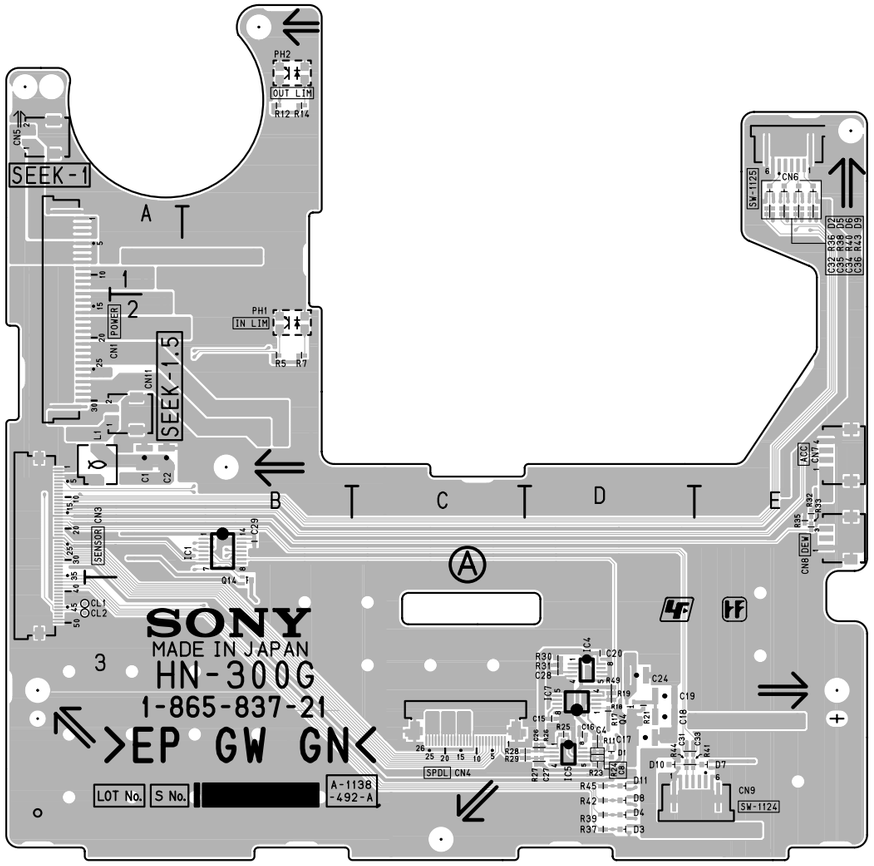

HN-300G -A SIDE-
SUFFIX: -21

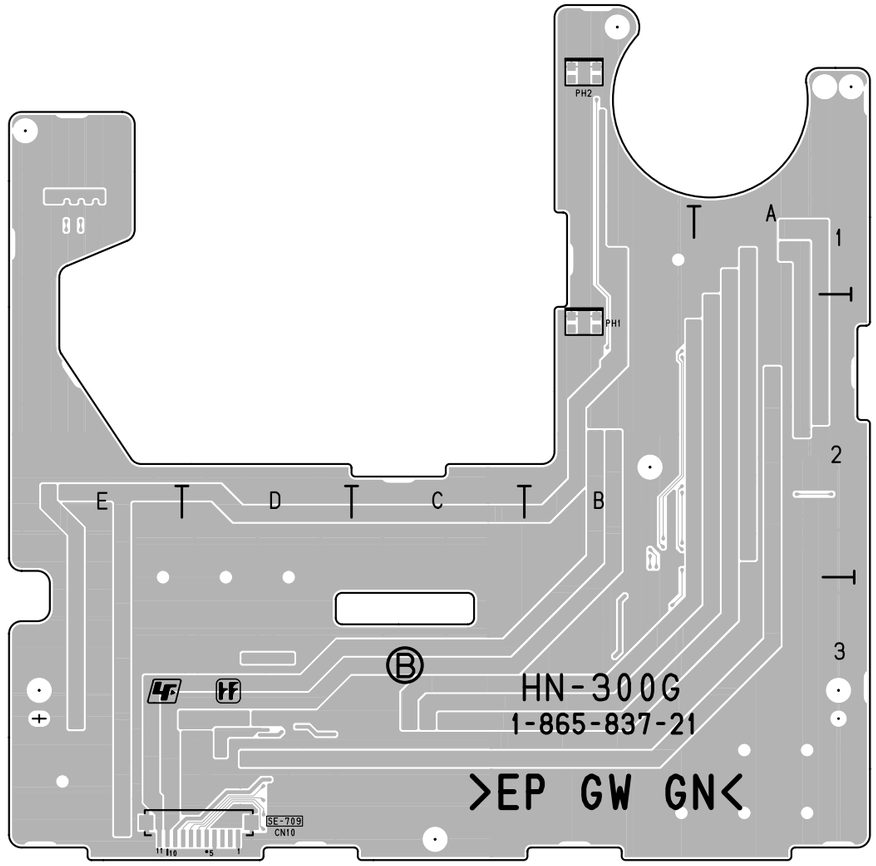

HN-300G -B SIDE-
SUFFIX: -21

```
---------------------
HN-300G (1-865-837-21)
---------------------

*:B SIDE

C1      A2    CN9     E3    R12     B1
C2      A2    CN10   *D3    R14     B1
C4      D3    CN11    A2    R17     D3
C8      D3                  R18     D3
C15     D3    D1      D3    R19     D3
C16     D3    D2      E1    R21     D3
C17     D3    D3      D3    R23     D3
C18     D3    D4      D3    R24     D3
C19     D3    D5      E1    R25     D3
C20     D3    D6      E1    R26     D3
C24     D3    D7      E3    R27     D3
C26     D3    D8      D3    R28     D3
C27     D3    D9      E1    R29     D3
C28     D3    D10     D3    R30     D3
C29     B2    D11     D3    R31     D3
C31     D3                  R32     E2
C32     E1    IC1     B2    R33     E2
C33     D3    IC4     D3    R35     E2
C34     E1    IC5     D3    R36     E1
C35     E1    IC7     D3    R37     D3
C36     E1                  R38     E1
              L1      A2    R39     D3
CL1     A3                  R40     E1
CL2     A3    PH1    *B2    R41     D3
              PH2    *B1    R42     D3
CN1     A2                  R43     E1
CN3     A2    Q4      D3    R44     D3
CN4     C3    Q14     B3    R45     D3
CN5     A1                  R49     D3
CN6     E1    R5      B2
CN7     E2    R7      B2
CN8     E2    R11     D3
```

JK-73, KSW-51, KY-573, LED-428, LGT-12, MA-136



JK-73 -A SIDE-
SUFFIX: -11



JK-73 -B SIDE-
SUFFIX: -11

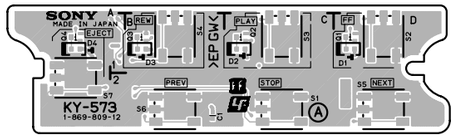

KY-573 -A SIDE-
SUFFIX: -12

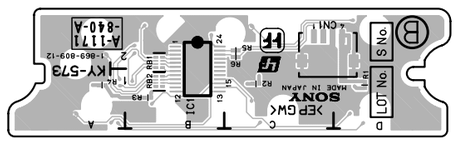

KY-573 -B SIDE-
SUFFIX: -12

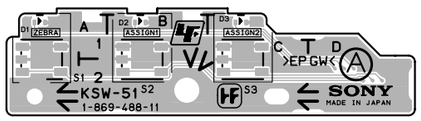

KSW-51 -A SIDE-
SUFFIX: -11



KSW-51 -B SIDE-
SUFFIX: -11



LED-428 -A SIDE-
SUFFIX: -11



LED-428 -B SIDE-
SUFFIX: -11

```
--------------------
KY-573 (1-869-809-12)
--------------------

*:B SIDE

C1       B2
CN1     *C2
D1       D1
D2       C1
D3       B1
D4       A1

IC1     *B2

Q1       D1
Q2       C1
Q3       B1
Q4       A1

R1      *D1
R2      *C1
R3      *B1
R4      *A1
R5      *C2
R6      *C2

RB1     *B2
RB2     *B1

S1       C2
S2       D1
S3       C1
S4       B1
S5       D2
S6       B2
S7       A2
```



LGT-12 -A SIDE-
SUFFIX: -11



LGT-12 -B SIDE-
SUFFIX: -11

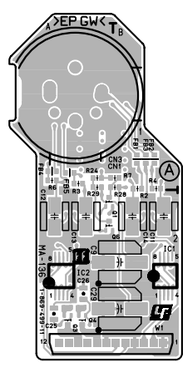

MA-136 -A SIDE-
SUFFIX: -11

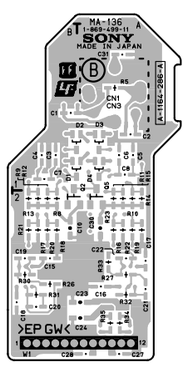

MA-136 -B SIDE-
SUFFIX: -11

```
--------------------
MA-136 (1-869-499-11)
--------------------

*:B SIDE

C1      *B1     CN1      A1     R8      *B2
C2      *A1     CN2      A2     R9      *B2
C3      *B1     CN3      A1     R10     *A2
C4      *B1                     R11     *A2
C5      *A1     D1      *B1     R12     *B2
C6      *A1     D2      *B1     R13     *B2
C7      *B1     D3      *A1     R14     *A2
C8      *A1     D4      *A1     R15     *A2
C9       B2                     R16     *A2
C10     *B2     FB1      B1     R17     *B2
C11      B2     FB2      B1     R18     *B2
C12      A2     FB3      B1     R19     *A2
C13      A2     FB4      A1     R20     *B2
C14      B2     FB5      A1     R21     *B2
C15     *B2                     R22     *A2
C16     *A2     IC1      B2     R23     *A2
C17     *A2     IC2      A2     R24      A1
C18     *B2                     R26     *B2
C19     *B2     Q1       A2     R27     *A2
C20     *B2     Q2      *B2     R28      B1
C21     *A2     Q3       A2     R29      A1
C22     *A2     Q4       A2     R30     *B2
C23     *A2     Q5      *A2     R31     *B2
C24     *A2     Q6       A2     R32     *A2
C25      A2                     R33     *A2
C26      A2     R2       B1     R34     *A2
C27     *A2     R3       A1     R35     *A2
C28     *A2     R4       B1
C29      B2     R5      *A1
C30     *A2     R6       A1
C31     *A1     R7       B1
```


5-12



MS-71 -A SIDE-
SUFFIX: -11



MS-71 -B SIDE-
SUFFIX: -11

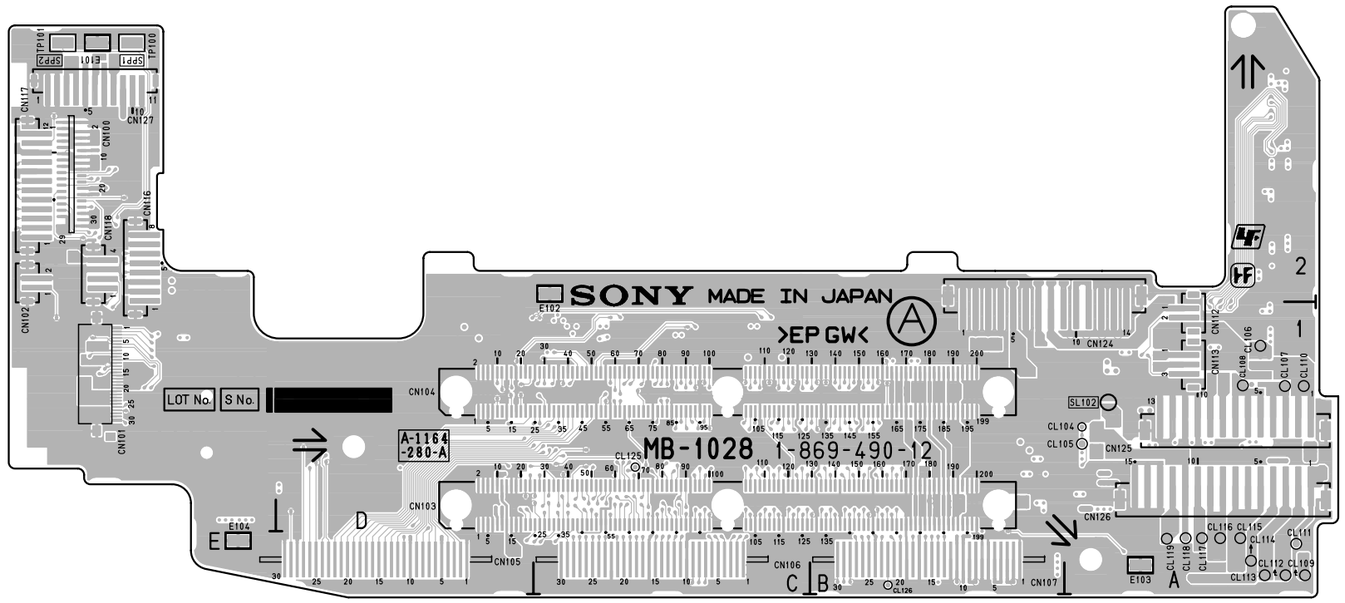

MB-1028 -A SIDE-
SUFFIX: -12

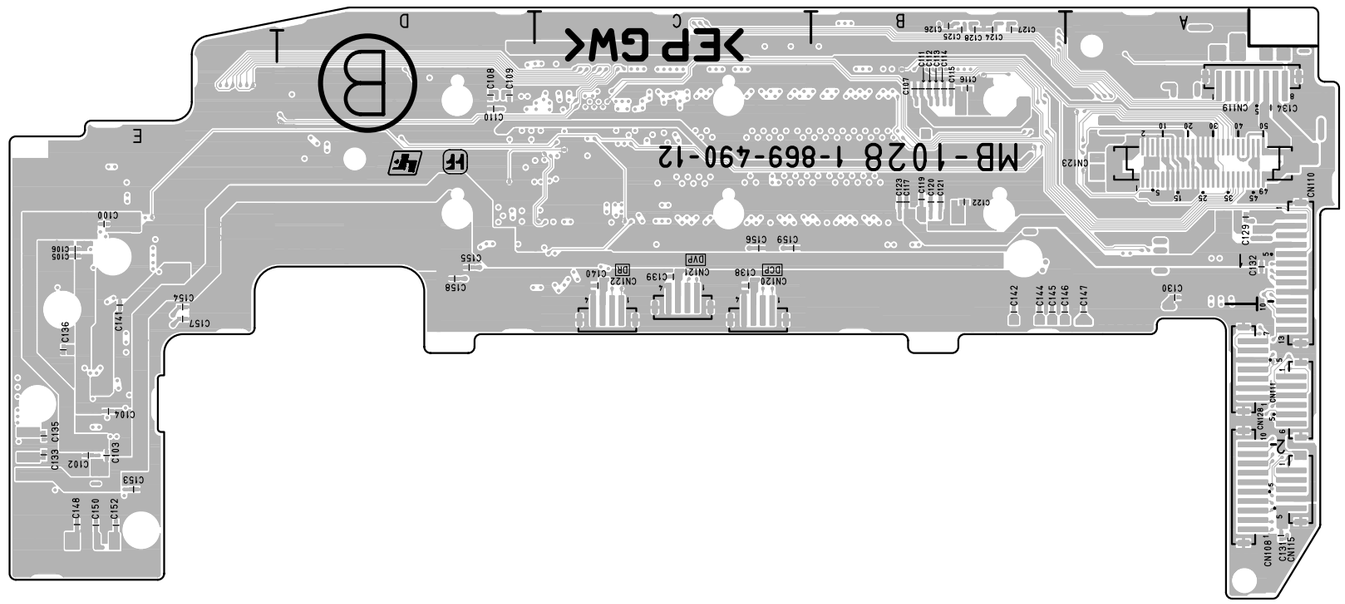

MB-1028 -B SIDE-
SUFFIX: -12

```
----------------------
MB-1028 (1-869-490-12)
----------------------

*:B SIDE

C100    *E1     CN110   *A1
C102    *E2     CN111   *A2
C103    *E2     CN112    A1
C104    *E2     CN113    A1
C105    *E1     CN115   *A2
C106    *E1     CN116    E2
C107    *B1     CN117    E2
C108    *D1     CN118    E2
C109    *D1     CN119   *A1
C110    *D1     CN120   *C2
C111    *B1     CN121   *C1
C112    *B1     CN122   *C2
C113    *B1     CN123   *A1
C114    *B1     CN124    B1
C115    *B1     CN125    A1
C116    *B1     CN126    A1
C117    *B1     CN127    E2
C119    *B1     CN128   *A2
C120    *B1
C121    *B1     E101     E2
C122    *B1     E102     C2
C123    *B1     E103     A1
C124    *B1     E104     E1
C125    *B1
C126    *B1     SL102    A1
C127    *B1
C128    *B1     TP100    E2
C129    *A1     TP101    E2
C130    *A1
C131    *A2
C132    *A1
C133    *E2
C134    *A1
C135    *E2
C136    *E2
C138    *C1
C139    *C1
C140    *C1
C141    *E2
C142    *B2
C144    *B2
C145    *B2
C146    *B2
C147    *A2
C148    *E2
C150    *E2
C152    *E2
C153    *E2
C154    *E2
C155    *D1
C156    *C1
C157    *E2
C158    *D1
C159    *C1

CL104    A1
CL105    A1
CL106    A1
CL107    A1
CL108    A1
CL109    A1
CL110    A1
CL111    A1
CL112    A1
CL113    A1
CL114    A1
CL115    A1
CL116    A1
CL117    A1
CL118    A1
CL119    A1
CL125    C1
CL126    B1

CN100    E2
CN101    E1
CN102    E2
CN103    C1
CN104    C1
CN105    D1
CN106    C1
CN107    B1
CN108   *A2
```

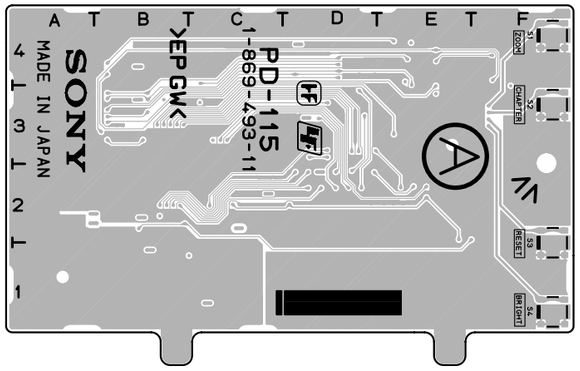

PD-115 -A SIDE-
SUFFIX: -11

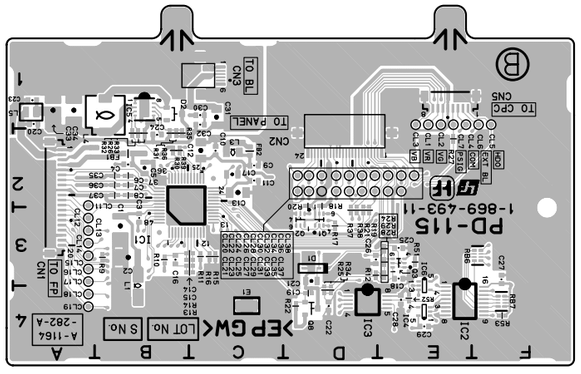

PD-115 -B SIDE-
SUFFIX: -11

PD-115 (1-869-493-11)
---

*:B SIDE

C1	*B3	CL24	*D2	R21	*D3
C2	*B3	CL25	*D2	R22	*D4
C3	*B3	CL26	*D2	R24	*E3
C4	*B2	CL27	*D2	R25	*D4
C5	*B2	CL28	*D2	R26	*B2
C6	*B2	CL29	*D2	R27	*E2
C7	*B2	CL30	*D2	R28	*E3
C8	*B2	CL31	*D2	R29	*E3
C9	*C2	CL32	*D2	R30	*B2
C10	*C2	CL33	*D2	R31	*B2
C11	*C2	CL34	*E2	R32	*B2
C12	*C2	CL35	*E2	R33	*B2
C13	*C2	CL36	*E2	R34	*D4
C14	*C3	CL37	*E2	R35	*B2
C15	*C3	CL38	*E2	R36	*B2
C16	*B3			R37	*D3
C17	*C2	CN1	*A2	R38	*D3
C18	*E3	CN2	*D2	R39	*B2
C19	*D4	CN3	*C1	R51	*E3
C20	*A1	CN5	*E1	R52	*E4
C21	*D3			R53	*F4
C22	*D4	D1	*D3		
C23	*A1	D2	*B1	RB6	*F3
C24	*B2			RB7	*F4
C25	*E3	E1	*C4		
C26	*D3			S1	F4
C27	*F3	FB1	*B2	S2	F3
C28	*E4	FB2	*C2	S3	F1
C29	*E4			S4	F1
C30	*C1	IC1	*B2		
C31	*C1	IC2	*E4		
C32	*C1	IC3	*D4		
C33	*A1	IC4	*E4		
C34	*A1	IC5	*B1		
C35	*B2	IC6	*E3		
C36	*B2				
C37	*B2	L1	*B3		
		L3	*C2		
CL1	*E1	L4	*B1		
CL2	*E1	L5	*A1		
CL3	*E1				
CL4	*E1	Q1	*D3		
CL5	*F1	Q2	*D3		
CL6	*F1	Q3	*E3		
CL7	*E1	Q8	*D4		
CL11	*A2				
CL12	*A3	R9	*B3		
CL13	*A3	R10	*B3		
CL14	*A3	R11	*C3		
CL15	*A3	R12	*D3		
CL16	*A3	R13	*C3		
CL17	*A3	R14	*C3		
CL18	*A4	R15	*C3		
CL19	*A4	R16	*C3		
CL20	*D2	R17	*D3		
CL21	*D2	R18	*D2		
CL22	*D2	R19	*D3		
CL23	*D2	R20	*D2		



PS-708 -A SIDE-
SUFFIX: -11



PS-708 -B SIDE-
SUFFIX: -11



PSW-85 -A SIDE-
SUFFIX: -11

PSW-85 -B SIDE-
SUFFIX: -11

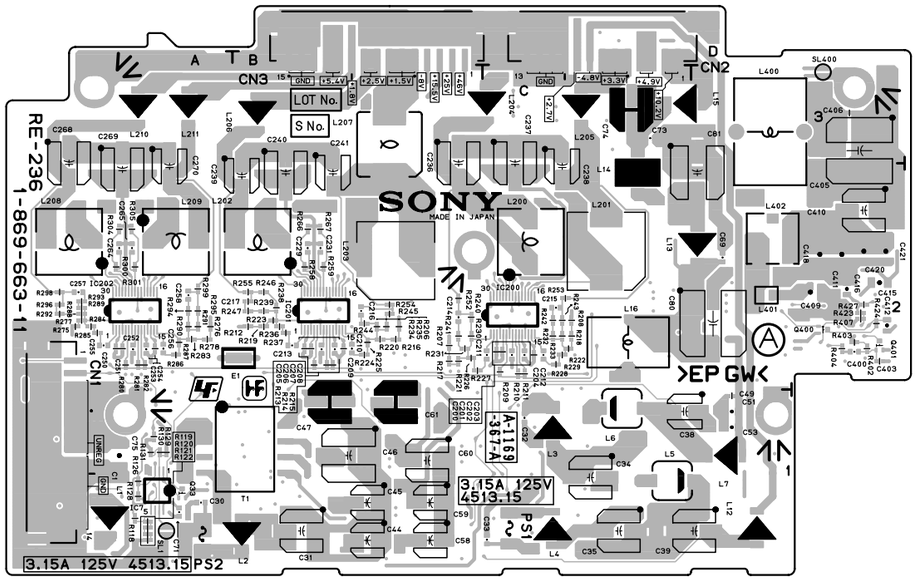

RE-236 -A SIDE-
SUFFIX: -11

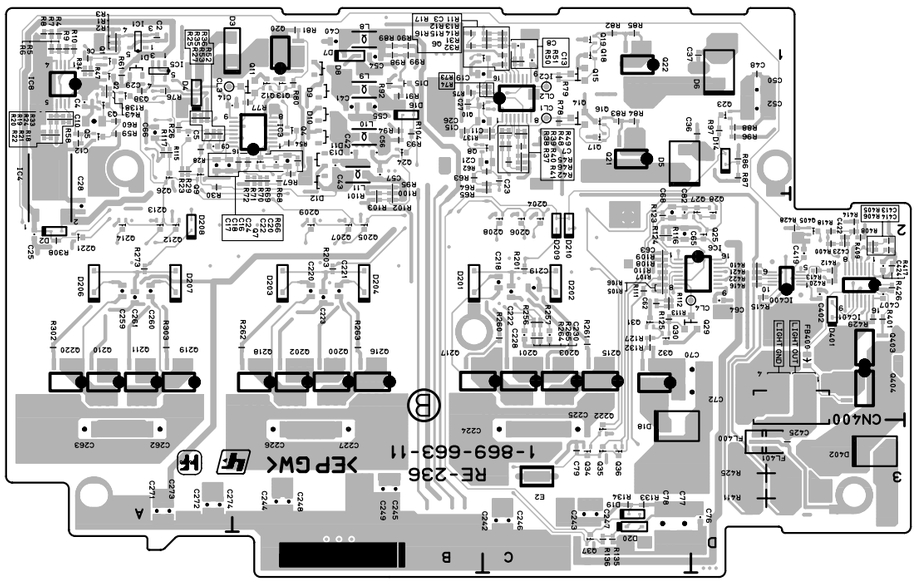

RE-236 -B SIDE-
SUFFIX: -11

RE-236 (1-869-663-11)
---

*:B SIDE

C1	A1	C210	B2	D1	*A1	Q4	*B1	R28	*A1	R124	*C2	R291	A2		
C2	*A1	C211	B2	D2	*A2	Q5	*A1	R29	*A1	R125	*C2	R292	A2		
C3	*B1	C212	C2	D3	*B1	Q6	*B1	R30	*A1	R126	A1	R293	A2		
C4	*A1	C213	B2	D4	*A1	Q7	*B1	R31	*C1	R127	*C2	R294	A2		
C5	*A1	C214	B2	D5	*C1	Q8	*B1	R32	*C1	R128	A1	R295	A2		
C6	*A1	C215	C2	D6	*D1	Q9	*A1	R33	*A1	R129	A1	R296	A2		
C7	*C1	C216	B2	D7	*B1	Q10	*B1	R34	*A1	R130	A1	R298	A2		
C8	*C1	C217	B2	D8	*B1	Q11	*B1	R35	*A1	R131	A1	R299	A2		
C9	*A1	C218	*C2	D9	*B1	Q12	*B1	R36	*A1	R132	*C2	R300	A2		
C10	*A1	C219	*C2	D10	*B1	Q13	*B1	R37	*C1	R133	*C3	R301	A2		
C11	*B1	C220	*B2	D11	*B1	Q14	*C1	R38	*C1	R134	*C3	R302	*A2		
C12	*A1	C221	*B2	D12	*B1	Q15	*C1	R39	*C1	R135	*C3	R303	*A2		
C13	*C1	C222	*C2	D13	*B1	Q16	*C1	R40	*C1	R136	*C3	R304	A2		
C14	*B1	C223	*B2	D14	*D1	Q17	*C1	R41	*C1	R137	*B1	R305	A2		
C15	*B1	C224	*C3	D15	*B1	Q18	*C1	R42	*C1	R138	*A1	R308	*A2		
C16	*B1	C225	*C3	D16	*B1	Q19	*C1	R43	*A1	R201	*C2	R400	*D2		
C17	*A1	C226	*B3	D18	*C3	Q20	*B1	R45	*C1	R203	*B2	R401	*D2		
C18	*B1	C227	*B3	D19	*C3	Q21	*C1	R46	*C1	R206	B2	R402	D2		
C19	*B1	C228	*C2	D20	*C3	Q22	*C1	R47	*A1	R207	B2	R403	D2		
C20	*B1	C229	B2	D201	*B2	Q23	*D1	R48	*C1	R208	C2	R404	D2		
C21	*B1	C230	*C2	D202	*C2	Q24	*B1	R49	*C1	R209	C2	R405	*D2		
C22	*B1	C231	B2	D203	*B2	Q25	*D2	R50	*C1	R210	C2	R406	*D2		
C23	*C1	C236	B3	D204	*B2	Q26	*A1	R51	*C1	R211	C2	R407	D2		
C24	*B1	C237	C3	D206	*A2	Q27	*D2	R52	*A1	R212	B2	R408	*D2		
C25	*A2	C238	C2	D207	*A2	Q28	*D2	R53	*A1	R213	B2	R409	*D2		
C26	*B1	C239	B2	D208	*A2	Q29	*D2	R54	*B1	R214	B2	R410	*D2		
C27	*B1	C240	B2	D209	*C2	Q30	*C2	R58	*A1	R215	B2	R411	*D3		
C28	*A2	C241	B2	D210	*C2	Q31	*C2	R59	*A1	R216	B2	R412	*D2		
C29	*A1	C242	*C3	D401	*D2	Q32	*C2	R60	*A1	R217	B2	R413	*D2		
C30	A1	C243	*C3	D402	*D3	Q33	A1	R61	*A1	R218	C2	R414	*D2		
C31	B1	C244	*B3			Q34	*C3	R62	*B1	R219	B2	R415	*D2		
C32	C1	C245	*B3	E1	B2	Q35	*C3	R63	*B1	R220	B2	R416	*D2		
C33	B1	C246	*C3	E2	*C3	Q36	*C3	R64	*B1	R221	B2	R417	*D2		
C34	C1	C247	*C3			Q37	*C3	R65	*B1	R222	C2	R418	*D2		
C35	C1	C248	*B3	FB400	*D2	Q38	*A1	R66	*B1	R223	B2	R420	*D2		
C36	*D1	C249	*B3			Q200	*B2	R67	*B1	R224	B2	R421	*D2		
C37	*D1	C250	A2	FL400	*D3	Q201	*C2	R68	*B1	R225	B2	R422	*D2		
C38	C1	C251	A2	FL401	*D3	Q202	*B2	R69	*B1	R226	B2	R423	D2		
C39	D1	C252	A2			Q203	*C2	R70	*B1	R227	B2	R424	D2		
C40	*B1	C253	A2	IC1	*A1	Q204	*C2	R71	*B1	R228	C2	R425	*D3		
C41	*B1	C254	A2	IC2	*C1	Q205	*B2	R72	*B1	R229	C2	R426	*D2		
C42	*B1	C255	A2	IC3	*B1	Q206	*C2	R73	*B1	R230	B2	R427	D2		
C43	*B1	C256	A2	IC4	*A1	Q207	*B2	R74	*B1	R231	B2	R428	*D2		
C44	B1	C257	A2	IC5	*A1	Q208	*C2	R75	*B1	R232	C2	R429	*D2		
C45	B1	C258	A2	IC6	*C2	Q209	*B2	R76	*A1	R233	C2				
C46	B1	C259	*A2	IC7	A1	Q210	*A2	R77	*B1	R234	B2	SL1	A1		
C47	B1	C260	*A2	IC8	*A1	Q211	*A2	R78	*C1	R235	B2	SL400	D3		
C48	*D1	C261	*A2	IC200	B2	Q212	*A2	R79	*C1	R236	B2				
C49	D1	C262	*A3	IC201	B2	Q213	*A2	R80	*B1	R237	B2	T1	B1		
C50	*D1	C263	*A3	IC202	A2	Q214	*A2	R81	*B1	R238	B2				
C51	D1	C264	A2	IC400	*D2	Q215	*C2	R82	*C1	R239	B2				
C52	*D1	C265	A2	IC401	*D2	Q216	*B2	R83	*C1	R240	B2				
C53	D1	C268	A3			Q217	*B2	R84	*C1	R241	B2				
C54	*B1	C269	A2	L1	A1	Q218	*B2	R85	*C1	R242	C2				
C55	*B1	C270	A2	L2	B1	Q219	*A2	R86	*D1	R243	C2				
C56	*B1	C271	*A3	L3	C1	Q220	*A2	R87	*D1	R244	B2				
C57	*B1	C272	*A3	L4	C1	Q221	*A2	R88	*D1	R245	B2				
C58	B1	C273	*A3	L5	C1	Q222	*C3	R89	*B1	R246	B2				
C59	B1	C274	*A3	L6	C1	Q400	D2	R90	*B1	R247	B2				
C60	B1	C400	D2	L7	D1	Q401	D2	R91	*B1	R252	B2				
C61	B1	C402	*D2	L8	*B1	Q403	*D2	R92	*B1	R253	C2				
C62	*C2	C403	D2	L9	*B1	Q404	*D2	R93	*B1	R254	B2				
C63	*C2	C405	D3	L10	*B1	Q405	*D2	R94	*B1	R255	B2				
C64	*D2	C406	D3	L11	*B1			R95	*B1	R256	*C2				
C65	*C2	C407	*D2	L12	D1	R1	*A1	R96	*D1	R257	*C2				
C66	*A1	C409	D2	L13	D2	R2	*A1	R97	*D1	R258	B2				
C68	*C2	C410	D2	L14	C2	R3	*A1	R98	*B1	R259	B2				
C69	D2	C411	D2	L15	C3	R4	*A1	R99	*B1	R260	*C2				
C70	*D2	C412	D2	L16	C2	R5	*A1	R100	*B2	R261	*C2				
C71	A1	C413	*D2	L200	C2	R6	*A1	R101	*B2	R262	*B2				
C72	*D2	C414	*D2	L201	C2	R7	*A1	R102	*B2	R263	*B2				
C73	C3	C415	D2	L202	B2	R8	*A1	R103	*B2	R264	*C2				
C74	C3	C416	D2	L203	B2	R9	*A1	R104	*B1	R265	*C2				
C75	A1	C418	D2	L204	B3	R10	*A1	R105	*C2	R266	B2				
C76	*D3	C419	*D2	L205	C3	R11	*C1	R106	*C2	R267	B2				
C77	*C3	C420	D2	L206	B3	R12	*B1	R107	*C2	R273	*A2				
C78	*C3	C421	D2	L207	B3	R13	*C1	R108	*C2	R275	A2				
C79	*C3	C422	*D2	L208	A2	R14	*C1	R109	*C2	R276	A2				
C80	D2	C423	*D2	L209	A2	R15	*B1	R110	*C2	R277	A2				
C81	D2	C424	*D2	L210	A3	R16	*B1	R111	*C2	R278	A2				
C82	*C2	C425	*D3	L211	A3	R17	*B1	R112	*C2	R280	A2				
C200	C2			L400	D3	R18	*A1	R113	*C2	R281	A2				
C201	C2	CL1	*C1	L401	D2	R19	*A1	R115	*A1	R282	A2				
C202	C2	CL2	*C1	L402	D2	R20	*A1	R116	*C2	R283	A2				
C203	C2	CL3	*B1			R21	*A1	R117	*A1	R284	A2				
C204	C2	CL4	*D2	PS1	C1	R22	*A1	R118	A1	R285	A2				
C205	B2			PS2	A1	R23	*A1	R119	A1	R286	A2				
C206	B2	CN1	A1			R24	*A1	R120	A1	R287	A2				
C207	B2	CN2	C3	Q1	*A1	R25	*A1	R121	A1	R288	A2				
C208	B2	CN3	B3	Q2	*A1	R26	*A1	R122	A1	R289	A2				
C209	B2	CN400	*D2	Q3	*A1	R27	*A1	R123	*C2	R290	A2				

RM-203, RX-96, SE-709, SE-743, SE-800, SW-1124, SW-1125G, SW-1246, SW-1249, TC-110

RM-203 -A SIDE-
SUFFIX: -11



RM-203 -B SIDE-
SUFFIX: -11



SE-743 -A SIDE-
SUFFIX: -11



SE-743 -B SIDE-
SUFFIX: -11

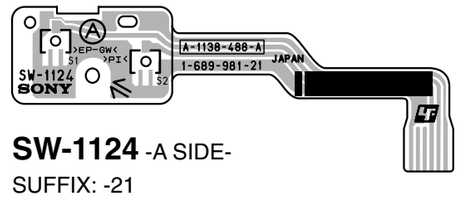

SW-1124 -A SIDE-
SUFFIX: -21



RX-96 -A SIDE-
SUFFIX: -11



RX-96 -B SIDE-
SUFFIX: -11



SE-800 -A SIDE-
SUFFIX: -11

SE-800 -B SIDE-
SUFFIX: -11

SW-1125G -A SIDE-
SUFFIX: -21

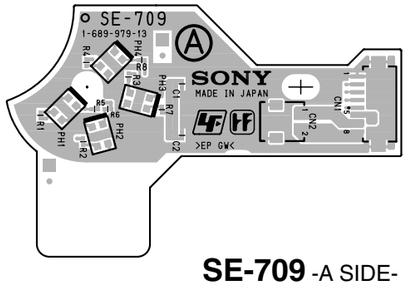

SE-709 -A SIDE-
SUFFIX: -13

```
---------------------
SE-709 (1-689-979-13)
---------------------

*:B SIDE

C1       A1
C2       A1

CN1      A1
CN2      A1

PH1      A1
PH2      A1
PH3      A1
PH4      A1

R1       A1
R2       A1
R3       A1
R4       A1
R5       A1
R6       A1
R7       A1
R8       A1
```



SW-1249 -A SIDE-
SUFFIX: -11



SW-1249 -B SIDE-
SUFFIX: -11



SW-1246 -A SIDE-
SUFFIX: -11



SW-1246 -B SIDE-
SUFFIX: -11

```
---------------------
SW-1246 (1-869-808-11)
---------------------

*:B SIDE

C5       A1
C6      *A2
C8       A2
C9       A2
C10      A2

CN1      B1
CN2      B2

D1       A1

PH1      A1
PH2      A2

PS1      A1

Q5      *A1
Q6      *B2

R2      *A2
R3      *A1
R4       A1
R6      *A2
R8      *B2
R12     *A2
```



TC-110 -A SIDE-
SUFFIX: -11

TC-110 -B SIDE-
SUFFIX: -11

5-16

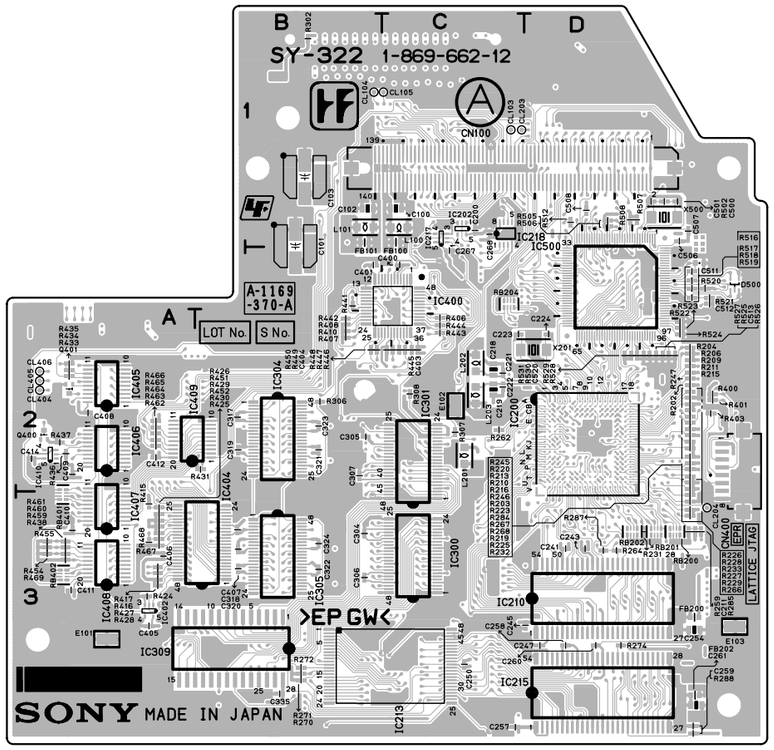

SY-322 -A SIDE-
SUFFIX: -12

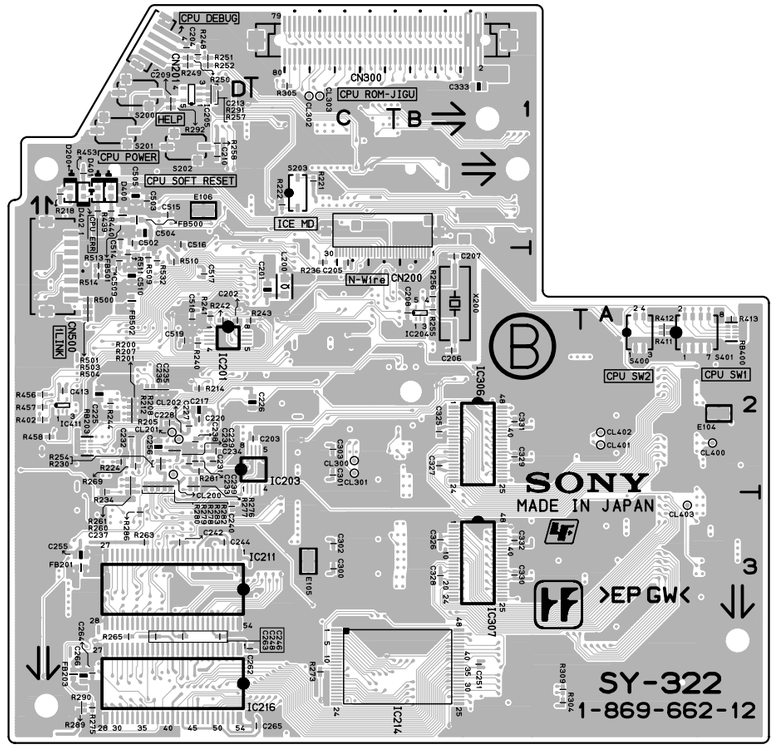

SY-322 -B SIDE-
SUFFIX: -12

SY-322 (1-869-662-12)
---

*:B SIDE

C100	C1	C237	*D3	C317	B2	C505	*D1	CN100	C1	IC211	*D3	R201	*D2	R243	*D2	R281	*D2	R428	A3	R466	A2	RB200	D3
C101	B1	C238	*D2	C318	B3	C506	D1	CN200	*C1	IC213	C3	R202	D2	R244	*D2	R282	*D2	R429	A3	R467	A3	RB201	D3
C102	B1	C239	*D2	C319	B2	C507	D1	CN201	*D1	IC214	*B3	R203	D2	R245	D2	R283	*D2	R430	A3	R468	A3	RB202	D3
C103	B1	C240	*D3	C320	B3	C508	D1	CN300	*C1	IC215	D3	R204	D2	R246	D2	R284	D2	R431	B2	R469	A3	RB203	*D2
C200	C1	C241	D3	C321	B2	C509	*D2	CN400	D2	IC216	*D3	R205	*D2	R247	D2	R285	D3	R433	A2	R500	*D2	RB204	C2
C201	*C2	C242	*D3	C322	B3	C510	*D2	CN500	*D2	IC217	C1	R206	D2	R248	*D1	R286	*D3	R434	A2	R501	*D2	RB400	*A2
C202	*D2	C243	D3	C323	B2	C511	D2			IC218	C1	R207	*D2	R249	*D1	R287	D3	R435	A2	R502	D1	RB401	A3
C203	*C2	C244	*D3	C324	B3	C512	D2	D200	*D1	IC300	C3	R208	*D2	R250	*D1	R288	D3	R436	A2	R503	*D2	RB402	A3
C204	*D1	C245	D3	C325	*B2	C513	D2	D400	*D1	IC301	C3	R209	D2	R251	*D1	R289	*D3	R437	A2	R504	*D2		
C205	*C2	C246	*D3	C326	*B3	C514	*D1	D401	*D1	IC304	B2	R210	D2	R252	*D1	R290	*D3	R438	A3	R505	D1	S200	*D1
C206	*B2	C247	D3	C327	*B2	C515	*D1	D402	*D1	IC305	B3	R211	D2	R254	*D2	R291	*D1	R439	*D1	R506	D1	S201	*D1
C207	*B2	C248	*D3	C328	*B3	C516	*D1	D500	D2	IC306	*B2	R212	*D2	R255	*B2	R292	*D1	R440	*D1	R507	D1	S202	*D1
C208	*B2	C250	C3	C329	*B2	C517	*D2			IC307	*B3	R213	D2	R256	*B2	R302	B1	R441	B2	R508	D1	S203	*C1
C209	*D1	C251	*B3	C330	*B3	C518	*D2	E101	A3	IC309	B3	R214	*D2	R257	*D1	R304	*B3	R442	B2	R509	*D2	S400	*A2
C210	*D1	C254	D3	C331	*B2	C519	*D2	E102	C2	IC400	C2	R215	D2	R258	*D1	R305	*C1	R443	C2	R510	*D2	S401	*A2
C211	D3	C255	*D3	C332	*B3	C520	D2	E103	D3	IC402	A3	R216	D2	R259	D3	R306	B2	R444	C2	R511	*D2		
C213	*D1	C256	*D2	C333	*B1			E104	*A2	IC404	B3	R218	*D1	R260	*D2	R307	C2	R445	C2	R512	D1	X200	*B2
C217	*D2	C257	C3	C335	B3	CL103	C1	E105	*C3	IC405	A2	R219	D2	R261	*D2	R308	C2	R446	C2	R513	*D2	X201	D2
C218	C2	C258	D3	C400	C2	CL104	B1	E106	*D1	IC406	A2	R220	D2	R262	C2	R309	*B3	R447	C2	R514	*D2	X500	D1
C219	C2	C259	D3	C401	B2	CL105	C1			IC407	A3	R221	*C1	R263	*D3	R400	D2	R448	C2	R516	D2		
C220	*D2	C260	D3	C403	C2	CL200	*D2	FB100	C1	IC408	A3	R222	*C1	R264	D3	R401	D2	R449	B2	R517	D2		
C221	C2	C261	D3	C404	C2	CL201	*D2	FB101	B1	IC409	B2	R223	D2	R265	*D3	R402	*D2	R450	B2	R518	D2		
C222	C2	C262	*D3	C405	A3	CL202	*D2	FB200	D3	IC410	A2	R224	*D2	R266	D3	R403	D2	R451	A3	R519	D2		
C223	C2	C263	*D3	C406	A3	CL203	C1	FB201	*D3	IC411	*D2	R225	D2	R267	D2	R406	C2	R452	A3	R520	D2		
C224	D2	C264	*D3	C407	B3	CL204	D3	FB202	D3	IC500	D2	R226	D2	R268	D2	R407	B2	R453	*D1	R521	D2		
C225	*D2	C265	*C3	C408	A2	CL300	*C2	FB203	*D3			R227	D3	R269	*D2	R408	B2	R454	A3	R522	D2		
C226	*C2	C266	*D3	C409	A2	CL301	*C2	FB500	*D1	L100	C1	R228	D2	R270	B3	R410	B2	R455	A3	R523	D2		
C227	*D2	C267	C2	C410	A3	CL302	*C1	FB501	*D1	L101	B1	R229	D3	R271	B3	R411	*A2	R456	*D2	R524	D2		
C228	*D2	C268	C1	C411	A3	CL303	*C1	FB502	*D2	L200	*C2	R230	*D2	R272	B3	R412	*A2	R457	*D2	R525	D2		
C229	*D2	C300	*C3	C412	A2	CL400	*A2			L201	C2	R231	D3	R273	*C3	R413	*A2	R458	*D2	R526	D2		
C230	*D2	C301	*C2	C413	*D2	CL401	*A2	IC200	D2	L202	C2	R232	D2	R274	D3	R415	A3	R459	A3	R527	D2		
C231	*D2	C302	*C3	C414	A2	CL402	*A2	IC201	*D2	L203	C2	R233	D3	R275	*D3	R416	A3	R460	A3	R528	D2		
C232	*D2	C303	*C2	C500	D1	CL403	*A3	IC202	C1			R234	*D3	R276	*D2	R417	A3	R461	A3	R529	D2		
C233	*D2	C304	B3	C501	D1	CL404	A2	IC203	*D2	Q400	A2	R236	*C2	R277	*D2	R424	A3	R462	A2	R530	D2		
C234	*D2	C305	B2	C502	*D1	CL405	A2	IC204	*B2	Q401	A2	R240	*D2	R278	*D2	R425	A3	R463	A2	R531	D2		
C235	*D2	C306	B3	C503	*D1	CL406	A2	IC205	*D1			R241	*D2	R279	*D2	R426	A3	R464	A2	R532	*D2		
C236	*D2	C307	B2	C504	*D1			IC210	D3	R200	*D2	R242	*D2	R280	*D2	R427	A3	R465	A2				

TG-249, VF-87, VIO-36A, VR-312

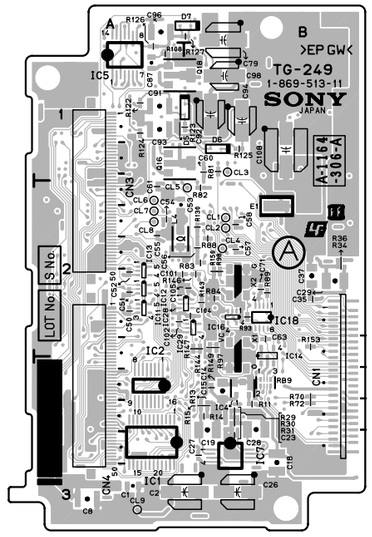

TG-249 -A SIDE-
SUFFIX: -11

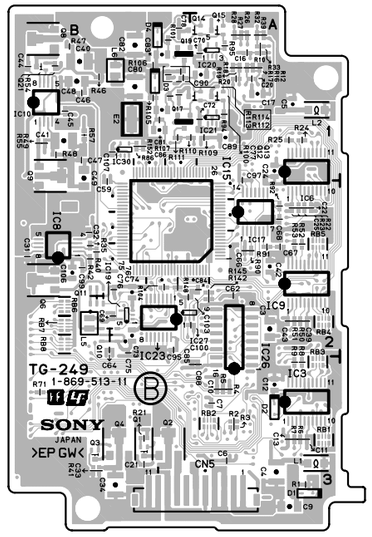

TG-249 -B SIDE-
SUFFIX: -11

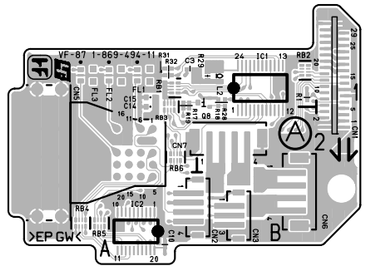

VF-87 -A SIDE-
SUFFIX: -11

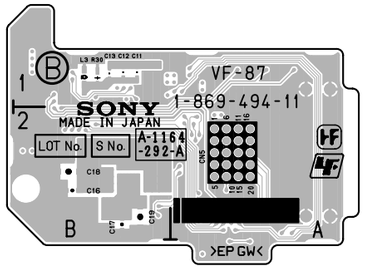

VF-87 -B SIDE-
SUFFIX: -11

VF-87 (1-869-494-11)
---

*:B SIDE

C3	A1	L2	B1
C10	A2	L3	*B1
C11	*B1		
C12	*B1	Q8	B1
C13	*B1		
C14	A2	R1	B1
C15	A1	R17	A1
C16	*B2	R18	B1
C17	*B2	R19	A1
C18	*B2	R28	B1
C19	*B2	R29	B1
		R30	*B1
CN1	B1	R31	A1
CN2	A2	R32	A1
CN3	B2		
CN5	A2	RB1	A1
CN6	B2	RB2	B1
CN7	B2	RB3	A2
		RB4	A2
FL1	A1	RB5	A2
FL2	A1	RB6	A2
FL3	A1		
IC1	B2		
IC2	A2		

TG-249 (1-869-513-11)
---

*:B SIDE

C1	A3	C52	A2	C101	A2	IC15	*B2	R10	*A1	R84	B2	RB5	*A2
C2	B3	C53	A2	C102	A2	IC16	B2	R11	B3	R86	*B1	RB6	*B2
C3	*A2	C54	A2	C103	*B2	IC17	*A2	R12	*A1	R88	B2	RB7	*B2
C4	*A3	C55	A2	C104	B2	IC18	B2	R13	B3	R89	B2	RB8	*B2
C5	*A1	C56	B2	C105	B2	IC19	*B2	R14	B3	R90	*A2	RB9	B3
C6	*A3	C57	B2	C106	*B2	IC20	*A1	R15	B3	R91	*A2		
C7	*A3	C58	B2	C107	*B1	IC21	*A1	R16	*A1	R92	*A2	X1	B2
C8	A3	C59	*B2	C108	B1	IC23	*B2	R17	*A1	R93	B2	X2	B2
C9	*A3	C60	B1			IC26	*A3	R18	*A1	R94	*A1		
C10	*A3	C61	A2	CL1	B2	IC27	*B2	R19	*A1	R95	*A1		
C11	*A3	C62	*A2	CL2	B2	IC28	B2	R20	*A1	R97	B2		
C12	*A3	C63	B2	CL3	B1	IC29	B2	R21	*B3	R98	B2		
C13	*A3	C64	*B2	CL4	B2	IC30	*B1	R22	*A2	R100	*B1		
C14	B3	C66	*A2	CL5	B2			R23	*A2	R101	*B1		
C15	B3	C67	*A2	CL6	A2	L1	*A3	R24	*A1	R104	*B2		
C16	*A1	C68	*A2	CL7	A2	L2	*A1	R25	*A1	R105	*B1		
C17	*A1	C69	*B2	CL8	A2	L4	A2	R26	*A1	R106	*B1		
C18	B3	C70	*A1	CL9	A3	L5	*B2	R27	*A1	R107	*B1		
C19	B3	C71	B2	CN1	B3	L6	*B1	R28	*A1	R108	A1		
C20	*A1	C72	*A1	CN3	A2			R29	B3	R109	*A1		
C21	*B3	C73	*B2	CN4	A3	Q1	*B3	R30	B3	R110	*A1		
C22	*A2	C74	*B2	CN5	*A3	Q2	*B3	R31	B3	R111	*B1		
C23	B3	C75	*B2			Q3	*B3	R32	*A1	R112	*B1		
C24	*A1	C76	*B2	D1	*A3	Q4	*B3	R33	*A1	R113	*B1		
C25	*A2	C77	*B1	D2	*A3	Q6	*B2	R34	B2	R114	*B1		
C26	B3	C78	*B1	D3	*B1	Q8	*B1	R35	*B2	R122	A1		
C27	B3	C79	B1	D4	*B1	Q9	*B1	R36	B2	R123	B1		
C28	B3	C80	*B1	D5	B1	Q10	*B2	R39	*A1	R124	A1		
C29	B2	C81	*B1	D6	B1	Q11	*B2	R40	*B2	R125	B1		
C31	*B2	C82	*B1	D7	B1	Q12	*A1	R41	*B3	R126	A1		
C32	*B2	C83	*B1			Q13	*A1	R42	*B2	R127	B1		
C33	*B3	C84	*A2	E1	B2	Q14	*A1	R46	*B1	R130	B2		
C34	*B3	C85	*A3	E2	*B1	Q15	*A1	R47	*B1	R142	*A2		
C35	B2	C86	*B1			Q16	A1	R48	*B1	R143	B2		
C37	B2	C87	A1	IC1	A3	Q17	*B1	R49	*B1	R144	B2		
C39	*A2	C88	*A3	IC2	A3	Q18	A1	R50	*A2	R145	*A2		
C40	*B1	C89	*A1	IC3	*A3	Q19	*B1	R51	*A2	R146	B2		
C41	*B1	C90	*A1	IC4	B3	Q21	*B1	R52	*A2	R147	B2		
C42	*A2	C91	A1	IC5	A1			R53	*A2	R148	*B2		
C43	*A2	C92	B1	IC6	*A2	R1	*A3	R54	*B1	R149	B2		
C44	*B1	C93	A1	IC7	B3	R2	*A3	R55	*B1	R150	B2		
C45	*B1	C94	B1	IC8	*B2	R3	*A3	R57	*B1	R152	*B1		
C46	*B1	C95	*B2	IC9	*A2	R4	*A3	R70	B3	R153	B2		
C47	*B1	C96	A1	IC10	*B1	R5	*A3	R71	*B3				
C48	*B1	C97	*A1	IC11	A2	R6	*A3	R72	B3	RB1	*A3		
C49	*B1	C98	B1	IC12	A2	R7	*A3	R81	B1	RB2	*A3		
C50	A2	C99	*B2	IC13	A2	R8	*A3	R82	B2	RB3	*A3		
C51	A2	C100	*A2	IC14	B2	R9	*A3	R83	B2	RB4	*A2		

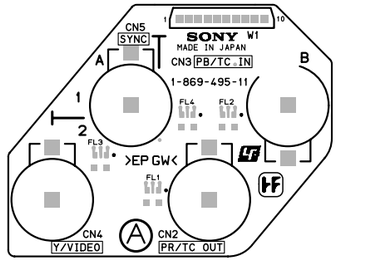

VIO-36A -A SIDE-
SUFFIX: -11

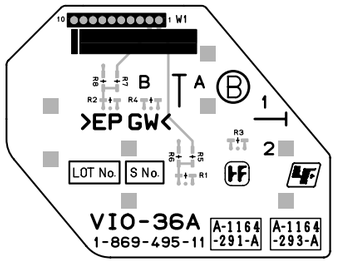

VIO-36A -B SIDE-
SUFFIX: -11

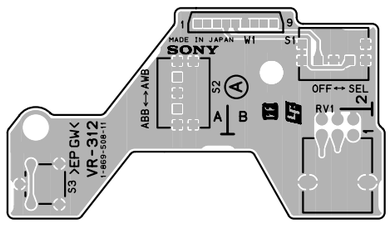

VR-312 -A SIDE-
SUFFIX: -11

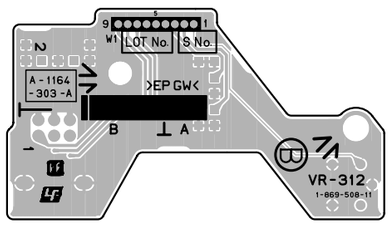

VR-312 -B SIDE-
SUFFIX: -11

5-18

PDW-F330 (SY)
PDW-F350 (SY) J,E
9-968-254-01

Sony Corporation

Printed in Japan
2006. 4 16
©2006