SONY

PROFESSIONAL DISC CAMCORDER

PDW-F800

HD/SD SDI INPUT BOARD
CBK-HD01

ANALOG COMPOSITE INPUT BOARD
CBK-SC02

MPEG HD422 Power HAD FX

Professional Disc DL

MEMORY STICK

MAINTENANCE MANUAL
Volume 2 1st Edition
Serial No. 10001 and Higher

⚠警告

このマニュアルは，サービス専用です。
お客様が，このマニュアルに記載された設置や保守，点検，修理などを行うと感電や火災，人身事故につながることがあります。
危険をさけるため，サービストレーニングを受けた技術者のみご使用ください。

⚠ WARNING

This manual is intended for qualified service personnel only.
To reduce the risk of electric shock, fire or injury, do not perform any servicing other than that contained in the operating instructions unless you are qualified to do so. Refer all servicing to qualified service personnel.

⚠ WARNUNG

Die Anleitung ist nur für qualifiziertes Fachpersonal bestimmt.
Alle Wartungsarbeiten dürfen nur von qualifiziertem Fachpersonal ausgeführt werden. Um die Gefahr eines elektrischen Schlages, Feuergefahr und Verletzungen zu vermeiden, sind bei Wartungsarbeiten strikt die Angaben in der Anleitung zu befolgen. Andere als die angegeben Wartungsarbeiten dürfen nur von Personen ausgeführt werden, die eine spezielle Befähigung dazu besitzen.

⚠ AVERTISSEMENT

Ce manual est destiné uniquement aux personnes compétentes en charge de l’entretien. Afin de réduire les risques de décharge électrique, d’incendie ou de blessure n’effectuer que les réparations indiquées dans le mode d’emploi à moins d’être qualifié pour en effectuer d’autres. Pour toute réparation faire appel à une personne compétente uniquement.

目次/Table of Contents

このマニュアルについて

本書の目的 ..... 5 (J)
関連マニュアル ..... 5 (J)

Manual Structure

Purpose of this manual ..... 5 (E)
Related manuals ..... 5 (E)

1. Spare Parts

1-1. 補修部品注意事項 1-1
1-1. Notes on Repair Parts 1-1
1-2. Exploded Views 1-2
1-3. Electrical Parts List 1-27
1-4. Supplied Accessories List 1-124
1-5. Optional Fixtures 1-124
1-6. CBK-HD01 1-124
1-7. CBK-SC02 1-125

2. Block Diagrams

Overall (Camera) 2-2
Overall (VDR) 2-3
Overall (Drive) 2-4
DR-606 2-5
SE-709 2-6
SE-857 2-6
SE-858 2-6
SW-1125G 2-6
AXM-38 2-8
CNB-25 2-8
DET-47 2-8
SW-1352 2-8
CN-3005 2-9
MB-1111 (1/2) 2-9
PS-708 2-9
PS-731 2-9
SW-1249 2-9
SW-1426 2-9
CN-2947 (1/2) 2-10
DR-617 2-10
PA-342A 2-10
PA-343A 2-10
PA-344 2-10
TG-260 (1/2) 2-10
CN-3001 2-11
MA-162 2-11
CN-2947 (2/2) 2-12
SE-803 2-12
TG-260 (2/2) 2-12
SY-355 2-13
CN-2946 2-14
CN-2948 2-15
CN-3026 2-15
DCP-49A 2-16
AT-177 2-17
MS-86 2-17
CN-3025 2-18
IO-235 2-18
RM-216 2-18
SW-1425 2-18
CI-37 2-19
RX-105 2-19
DVP-45 2-20
IV-59 2-21
SW-1385 2-21
FP-157 2-22
HP-148 2-22
HP-149 2-22
RX-101 2-22
DET-45 2-23
ENC-118 2-23
KY-623 2-23
LED-444 2-23
MB-1111 (2/2) 2-23
PD-118 2-23
SW-1391 2-23
RE-246 2-24

3. Schematic Diagrams

AT-177 3-2
AXM-38 3-6
CI-37 3-7
CN-2946 3-8
CN-2947 3-9
CN-2948 3-9
CN-3001 3-9
CN-3005 3-10
CN-3025 3-11
CN-3026 3-11
CNB-25 3-12
DCP-49A 3-16
DET-45 3-34
DET-47 3-34
DR-606 3-35
DR-617 3-42
DVP-45 3-44
ENC-118 3-69
FP-157 3-71
HP-148 3-83
HP-149 3-83
IO-235 3-84
KY-623 3-85
LED-444 3-86
MA-162 3-87
MB-1111 3-88
MS-86 3-90
PA-342A 3-91
PA-343A 3-92
PA-344 3-93
PD-118 3-94
PS-708 3-95
PS-731 3-97
RE-246 3-98
RM-216 3-101
RX-101 3-102
SE-709 3-103
SE-803 3-103
SE-857 3-103
SE-858 3-104
SW-1125G 3-104
SW-1249 3-105
SW-1352 3-105
SW-1385 3-105
SW-1391 3-106
SW-1425 3-106
SW-1426 3-106
SY-355 3-107
TG-260 3-130
RX-105 (CBK-HD01) 3-132
IV-59 (CBK-SC02) 3-133
Frame Wiring 3-134

4. Board Layouts

AT-177 4-2
AXM-38 4-2
CI-37 4-3
CN-2946 4-3
CN-2947 4-3
CN-2948 4-3
CN-3001 4-3
CN-3005 4-3
CN-3025 4-3
CN-3026 4-3
CNB-25 4-4
DCP-49A 4-5
DET-45 4-7
DET-47 4-7
DR-606 4-7
DR-617 4-7
DVP-45 4-8
ENC-118 4-10
FP-157 4-10
HP-148 4-11
HP-149 4-11
IO-235 4-13
KY-623 4-13
LED-444 4-13
MA-162 4-13
MB-1111 4-14
MS-86 4-14
PA-342A 4-15
PA-343A 4-15
PA-344 4-15
PD-118 4-16
PS-708 4-16
PS-731 4-16
RE-246 4-17
RM-216 4-17
RX-101 4-17
SE-709 4-17
SE-803 4-18
SE-857 4-18
SE-858 4-18
SW-1125G 4-18
SW-1249 4-18
SW-1352 4-18
SW-1385 4-18
SW-1391 4-18
SW-1425 4-19
SW-1426 4-19
SY-355 4-19
TG-260 4-21
RX-105 (CBK-HD01) 4-22
IV-59 (CBK-SC02) 4-22

このマニュアルについて

本書の目的

PDW-F800 のメンテナンスマニュアルには，Volume 1 と Volume 2 があります。メンテナンスマニュアル (Volume 1, 2) は，システム／サービスエンジニアの方々にご使用いただくことを想定し，保守に関する情報と部品レベルでのサービスを前提とした情報を記載しています。

関連マニュアル

この機種には以下のマニュアルが用意されています。
入手を希望される方は，ソニーの営業窓口にお問い合わせください。

- **オペレーションマニュアル (本機に付属)**
  本機を実際に運用および操作するのに必要なマニュアルです。

- **メンテナンスマニュアル**
  Volume 1：保守に関する情報，部品交換，調整要項を記載しています。
  部品番号：9-968-642-01
  Volume 2：ブロック図，回路図，マウント図，詳細パーツリストを記載しています。
  部品番号：9-968-644-01

- **“Semiconductor Pin Assignments” CD-ROM 版**
  この “Semiconductor Pin Assignments” CD-ROM 版は，放送用および業務用の機器に使用されている半導体を検索することができます。
  部品番号：9-968-546-06

Manual Structure

Purpose of this manual

There are volume 1 and volume 2 in the Maintenance manual of PDW-F800.
The maintenance manuals (volume 1, 2) are intended for use by trained system and service engineers, and provides the information of maintenance and detailed service.

Related manuals

The following manuals are available in this model.
If this manual is required, please contact your local Sony Sales Office/Service Center.

- **Operation Manual (Supplied with the unit)**
  This manual is necessary for application and operation (and installation) of this unit.

- **Maintenance Manual**
  Volume 1: Describes about maintenance information, parts replacement, and guideline for adjustment.
  Part number: 9-968-643-01
  Volume 2: Describes about block diagrams, schematic diagrams, board layouts and detailed parts list required for parts-level service.
  Part number: 9-968-644-01

- **“Semiconductor Pin Assignments” CD-ROM**
  This “Semiconductor Pin Assignments” CD-ROM allows you to search for semiconductors used in Broadcast and Professional equipment.
  Part number: 9-968-546-06

Section 1
Spare Parts

1-1. Notes on Repair Parts

1. Safety Related Components Warning

WARNING

Components marked ⚠ are critical to safe operation. Therefore, specified parts should be used in the case of replacement.

2. Standardization of Parts

Some repair parts supplied by Sony differ from those used for the unit. These are because of parts commonality and improvement.

3. Stock of Parts

Parts marked with “o” at SP (Supply Code) column of the spare parts list may not be stocked. Therefore, the delivery date will be delayed.

4. Harness

Harnesses with no part number are not registered as spare parts.

1-1. 補修部品注意事項

1. 安全重要部品

⚠警告

⚠印のついた部品は安全性を維持するために重要な部品です。したがって，交換する時は必ず指定の部品を使ってください。

2. 部品の共通化

ソニーから供給する補修用部品は，セットに使われているものと異なることがあります。
これは部品の共通化，改良等によるものです。


3. 部品の在庫

部品表のSP (Supply code) 欄に“o”で示される部品は在庫していないことがあり，納期が長くなることがあります。


4. ハーネス

部品番号が記載されていないハーネスは，サービス部品として登録されていません。

1-2. Exploded Views

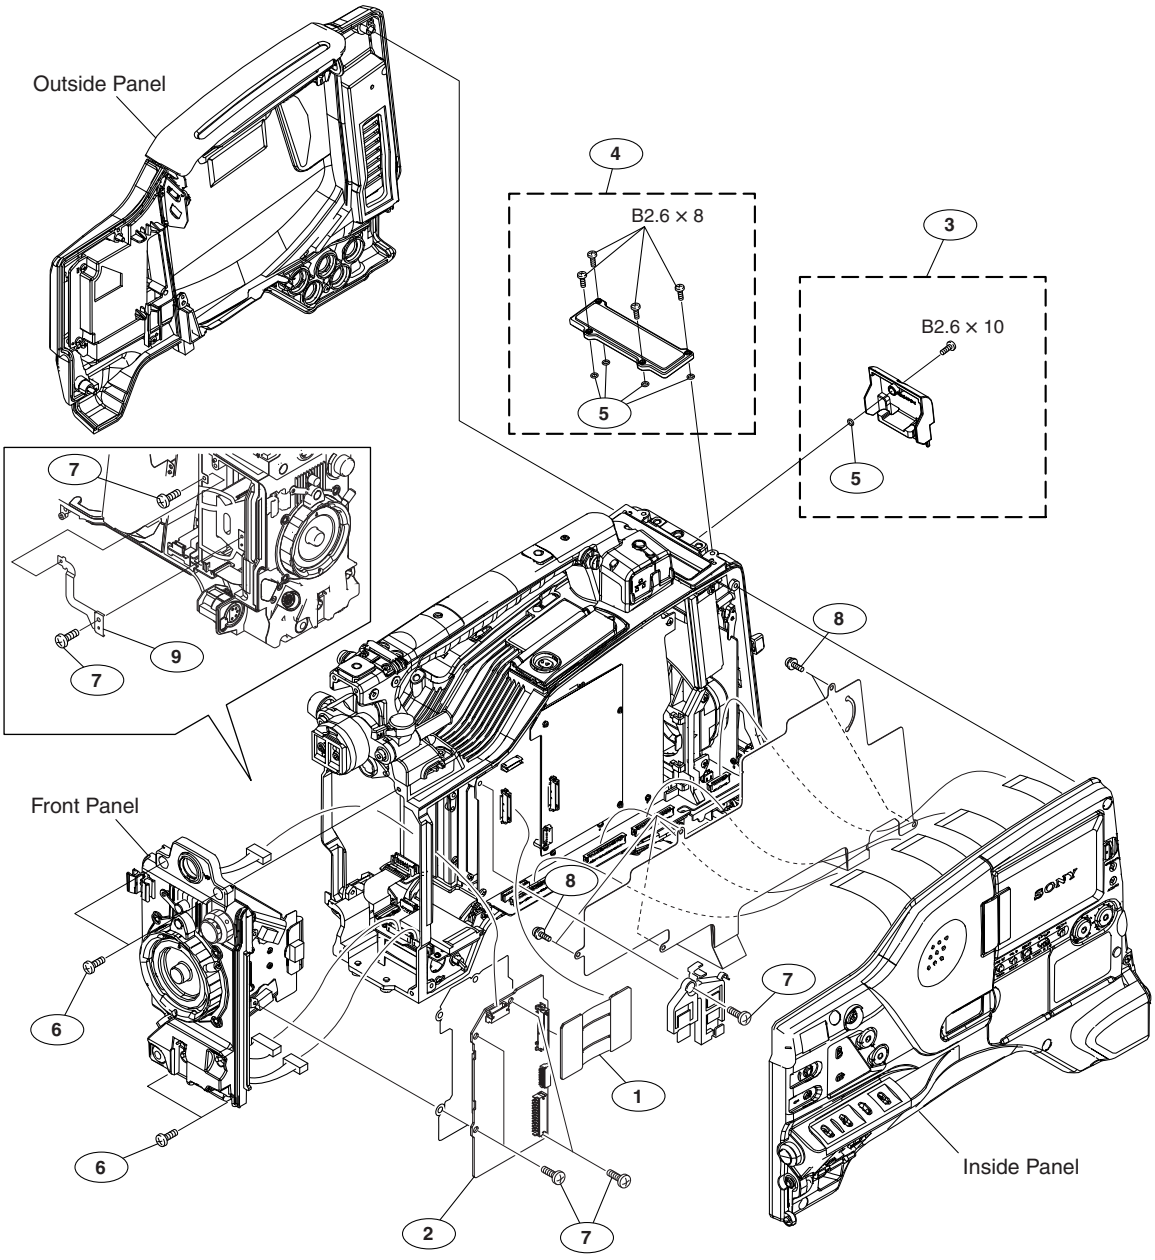


No.	Part No.	SP	Description
1	A-1539-040-A	s	MOUNTED CIRCUIT BOARD, CN-2947
2	A-1540-092-A	s	MOUNTED CIRCUIT BOARD, TG-260
3	A-1541-506-A	s	COVER ASSY, 50P
4	A-1541-534-A	s	PLATE (WRR) ASSY, BLIND
5	3-742-004-01	s	RING, NYLON
6	3-742-074-13	s	SCREW (+B 3X8)
7	3-364-941-01	s	SCREW (+B) (2.6X5), NYLOK
8	3-855-938-01	s	SCREW
9	4-127-959-02	s	STAY (OUT)
	7-621-775-40	s	SCREW +B 2.6X8
	7-621-775-50	s	SCREW +B 2.6X10

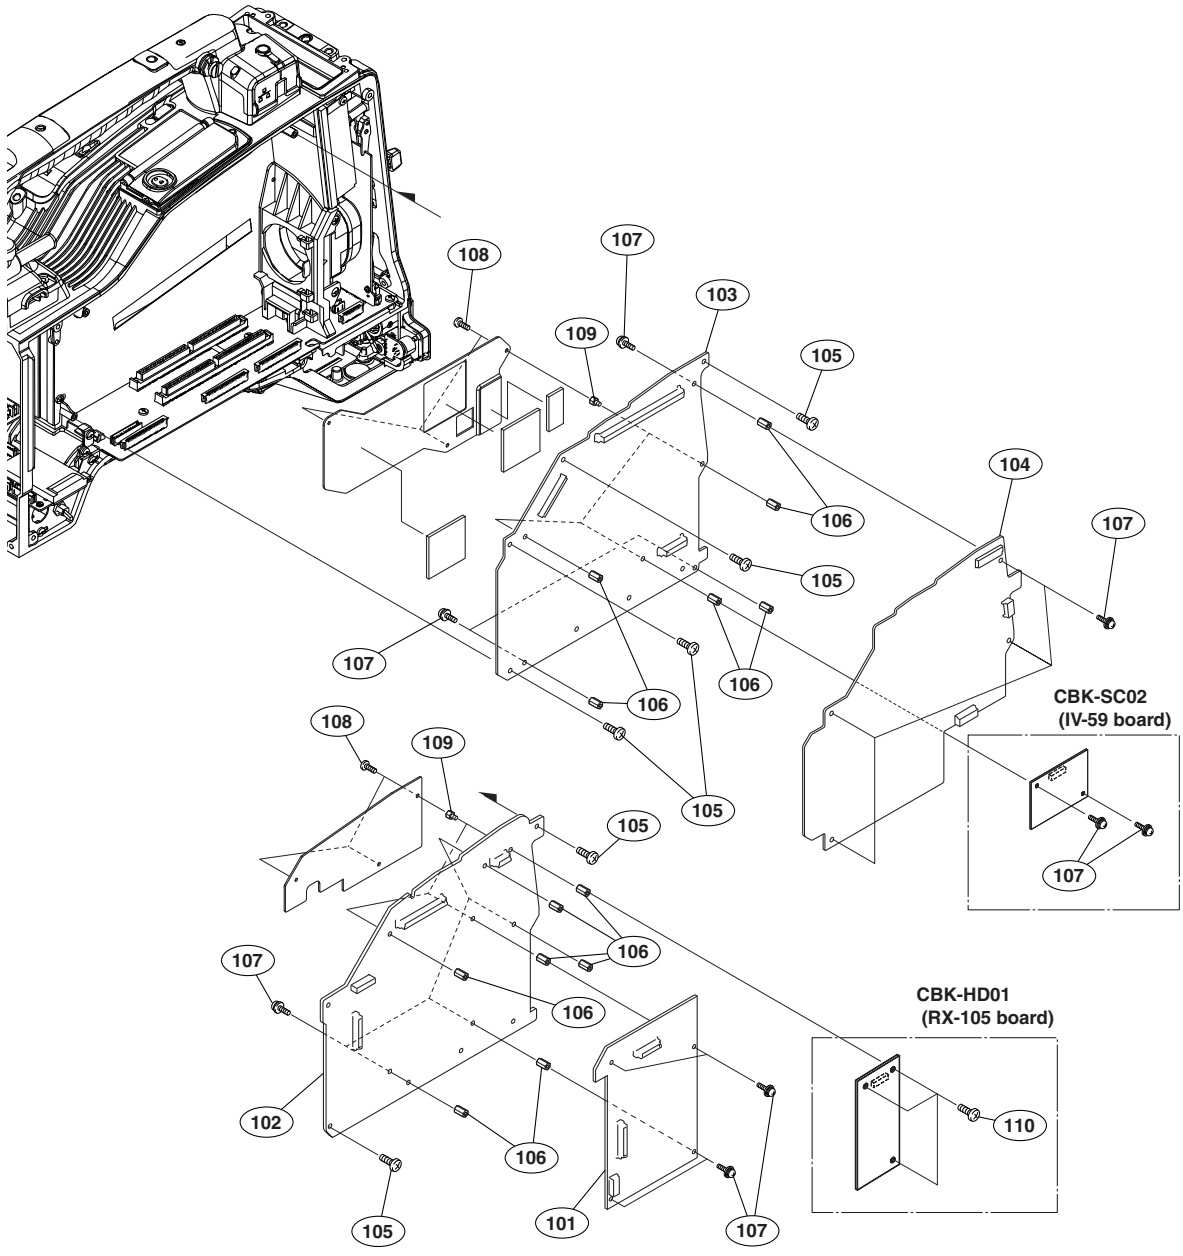


No.	Part No.	SP	Description
101	A-1538-880-A	s	MOUNTED CIRCUIT BOARD, AT-177
102	A-1734-504-A	s	MOUNTED CIRCUIT BOARD, DCP-49A
103	A-1538-884-B	s	MOUNTED CIRCUIT BOARD, DVP-45
104	A-1538-888-A	s	MOUNTED CIRCUIT BOARD, SY-355
105	3-364-941-01	s	SCREW (+B) (2.6X5), NYLOK
106	3-854-997-01	s	SUPPORT(M2X7)
107	3-855-938-01	s	SCREW
108	3-968-729-81	s	SCREW (M2), LOCK ACE, P2
109	3-875-192-01	s	SUPPORT HEATSINK
110	3-729-076-01	s	SCREW (+B) (2X3)

Front Block

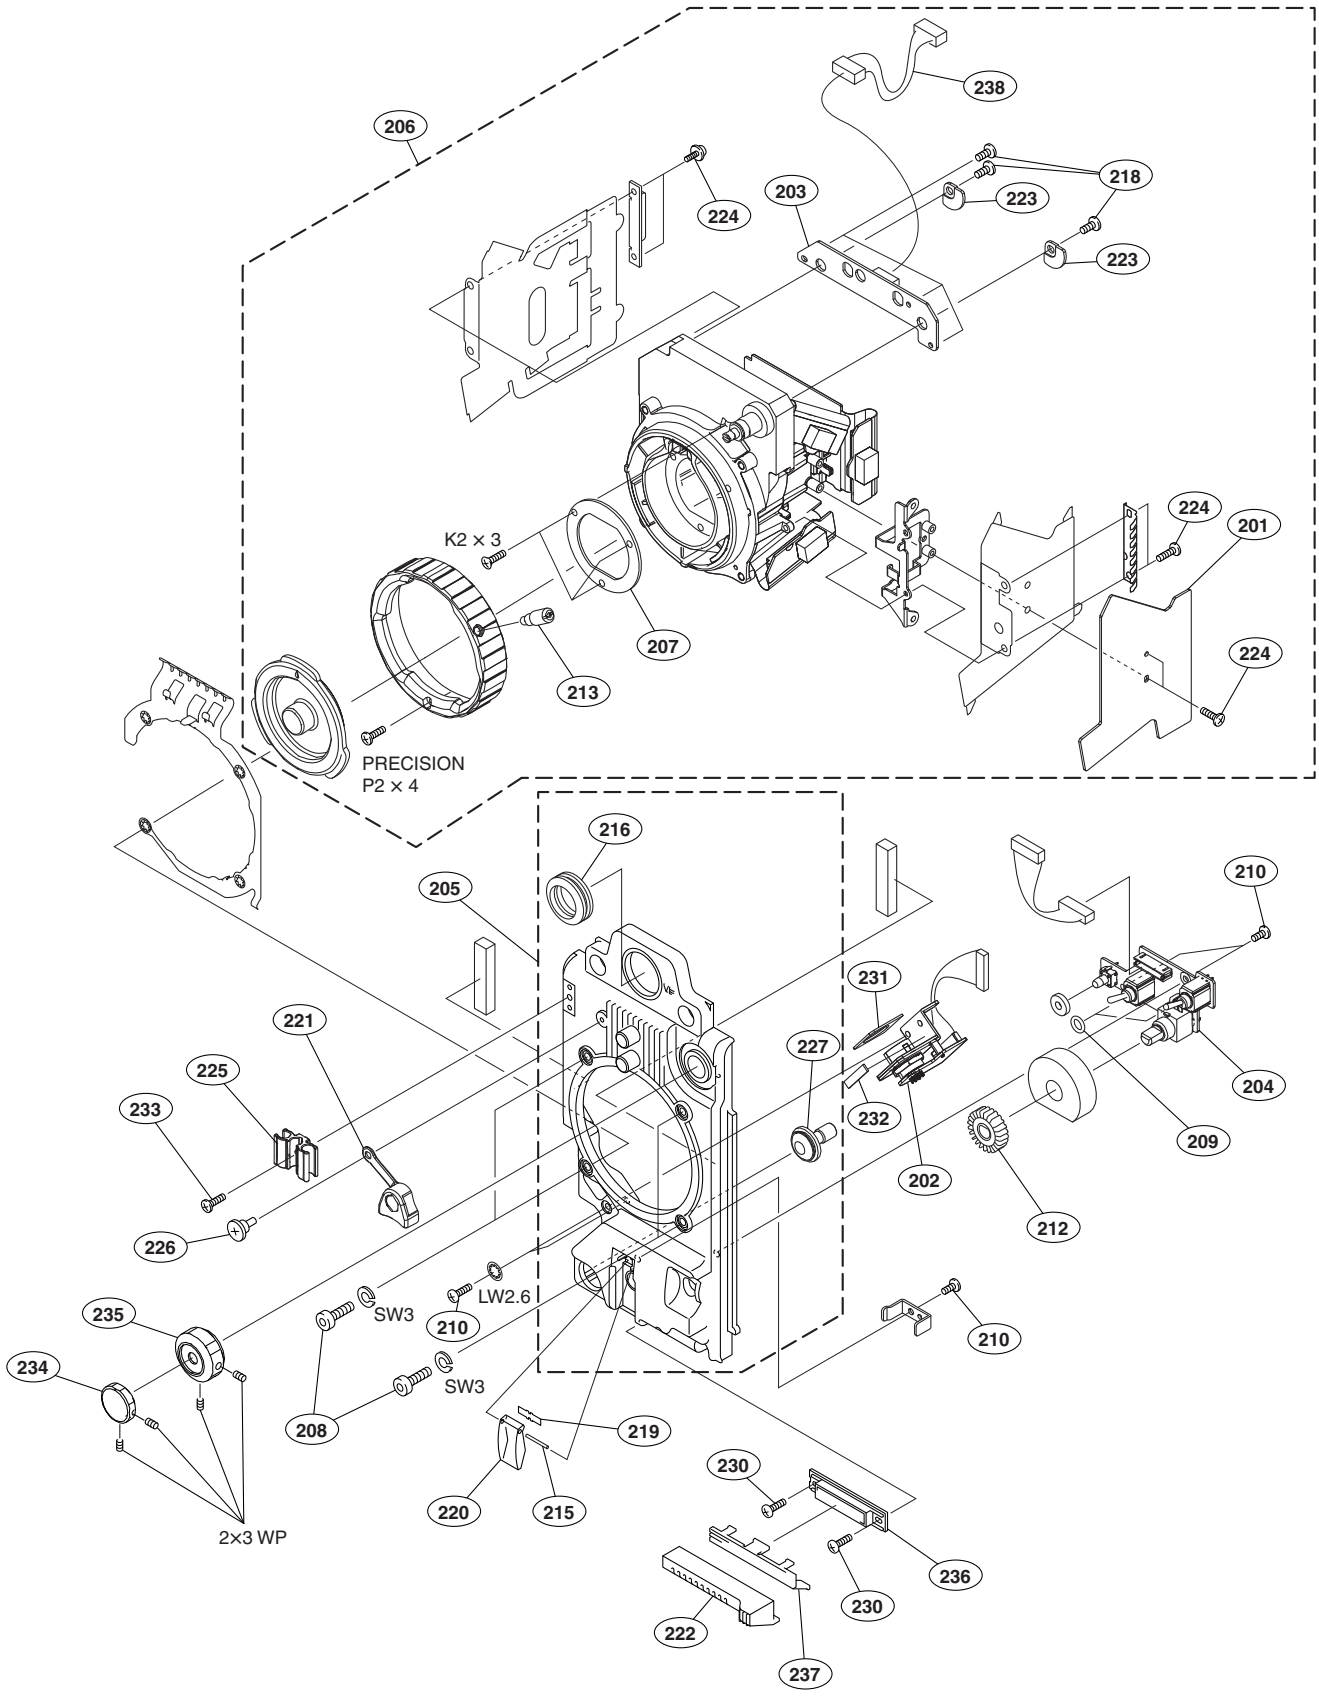
206
238
224
203
218
223
223
K2 × 3
224
201
207
213
224
PRECISION
P2 × 4
216
205
210
231
221
227
225
204
233
232
209
202
212
226
SW3
LW2.6
210
210
235
234
SW3
208
219
220
215
230
236
230
222
237
2×3 WP


No.	Part No.	SP	Description
201	A-1540-090-A	s	MOUNTED CIRCUIT BOARD, DR-617
202	A-1540-098-A	s	MOUNTED CIRCUIT BOARD, CN-3025
203	A-1091-734-A	s	MOUNTED CIRCUIT BOARD, SE-803
204	A-1540-980-A	s	MOUNTED CIRCUIT BOARD, SW-1425
205	A-1541-529-A	s	FRONT PANEL SUB ASSY
206	A-1731-981-A	s	CCD BLOCK ASSY
207	1-788-764-21	s	FILTER UNIT, OPTICAL
208	2-623-773-11	s	BOLT (M3X8), STAINLESS
209	3-312-823-01	s	PACKING, KNOB
210	3-364-941-01	s	SCREW (+B) (2.6X5), NYLOK
212	3-624-135-01	s	KNOB,VR(AUDIO)
213	3-678-629-04	s	LEVER, MOUNT
215	3-703-357-05	s	PIN, PARALLEL (DIA. 1.6X8)
216	3-710-024-02	s	PACKING, VF
218	3-729-076-11	s	SCREW (+B) (2X4)
219	3-742-066-11	o	SPRING, SHUTTER
220	3-742-067-05	s	LID, SHUTTER
221	3-796-982-02	s	HOLDER LENS MOUNT
222	3-854-361-01	s	GUARD VOLUME FRONT
223	3-854-378-01	s	PLATE,FILTER ID
224	3-855-938-01	s	SCREW
225	3-870-272-02	s	CLAMP, CABLE
226	3-965-077-02	s	SCREW, SPECIAL (M2)
227	3-986-632-02	s	BUTTON,VTR START
230	4-654-273-02	s	ACE (M2), LOCK
231	3-796-967-02	s	CUSHION,DROP PROTECTION CONNEC
232	3-796-970-02	s	CUSHION,DROP PROTECTION CONNEC
233	4-674-315-01	s	SCREW (M2.6X6)
234	3-679-670-03	s	KNOB,FILTER(ND)
235	3-679-671-11	s	KNOB,FILTER(CC)
236	3-854-362-01	s	HOLDER GUARD
237	3-854-363-01	s	SLIDER
238	1-960-884-14	s	HARNESS,SUB(HP104)
	7-621-732-09	s	SET-SCT HEX. 2X3 WP
	7-623-208-22	s	SW 3,TYPE 2
	7-623-307-07	s	LW 2.6,TYPE (A)
	7-627-452-18	s	SCREW,PRECISION +K 2X3

Outside Panel 1

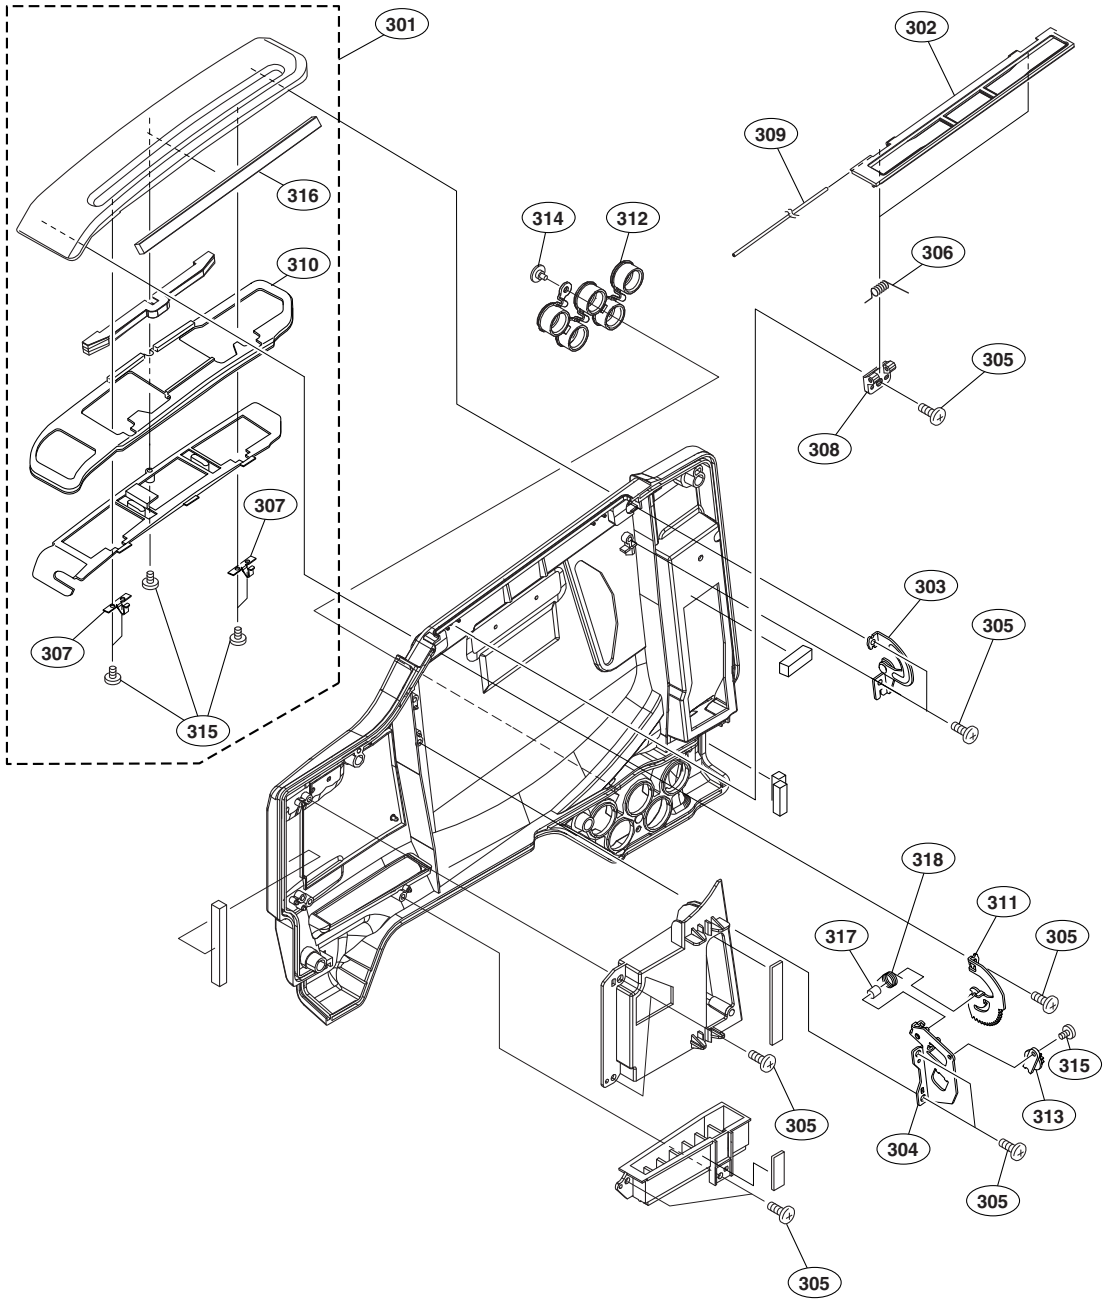

No.	Part No.	SP	Description
301	A-1729-314-A	s	LID ASSY, CARTRIDGE
302	X-3608-690-3	s	ASSY,SHUTTER INNER
303	X-3698-568-4	s	ARM(L)ASSY,LID
304	X-3698-570-3	s	HOLDER(R) ASSY,ARM,LID
305	3-364-941-01	s	SCREW (+B) (2.6X5), NYLOK
306	3-797-003-01	s	SPRING 02,TORSION
307	3-797-004-04	s	HOLDER,OUT LID
308	3-797-058-01	s	HOLDER,SHUTTER,INNER
309	3-797-059-01	s	SHAFT,SHUTTER,INNER
310	3-825-462-02	s	PROTECTION,OUTER LID


No.	Part No.	SP	Description
311	3-868-613-04	s	(R)ARM,LID
312	3-870-160-01	s	COVER (PH3), BNC
313	3-953-235-11	s	DAMPER, OIL
314	3-965-077-02	s	SCREW, SPECIAL (M2)
315	3-968-729-81	s	SCREW (M2), LOCK ACE, P2
316	3-991-426-01	s	ABSORBENT,ACOUSTIC
317	3-991-830-02	s	COLLAR(2)
318	3-991-834-01	s	(OPEN)SPRING TORSION

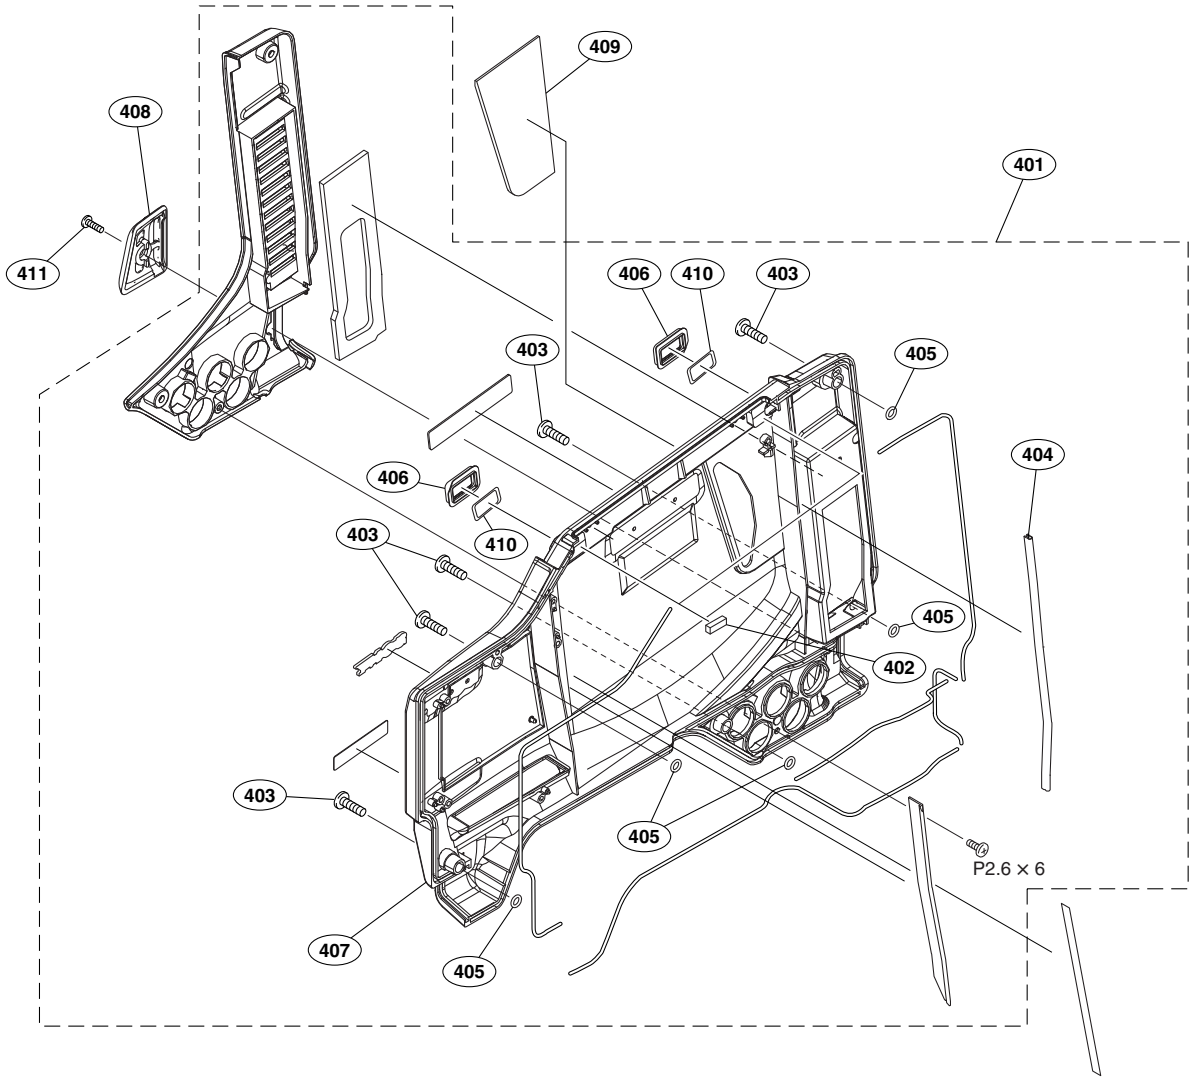

No.	Part No.	SP	Description
401	A-1729-313-A	s	PANEL SUB ASSY, OUTSIDE
402	3-323-259-01	s	SPACER (B)
403	3-603-680-02	s	STAINLESS SCREW +B3X12
404	3-603-753-03	s	DUST PROTECT(2)
405	3-672-250-01	s	RING (M2.6), O
406	3-797-005-03	s	PROTECTION,ARM LID
407	3-870-147-03	s	PANEL, OUT SIDE
408	3-870-158-01	s	PROTECTOR
409	3-870-159-02	s	WINDOW, OUTSIDE
410	3-991-719-02	s	SHEET,ADHENSIVE

No.	Part No.	SP	Description
411	3-364-941-12	s	SCREW (+B) (2.6X5), NYLOK
	7-685-133-11	s	SCREW +P 2.6X6 TYPE2


Inside Panel 1

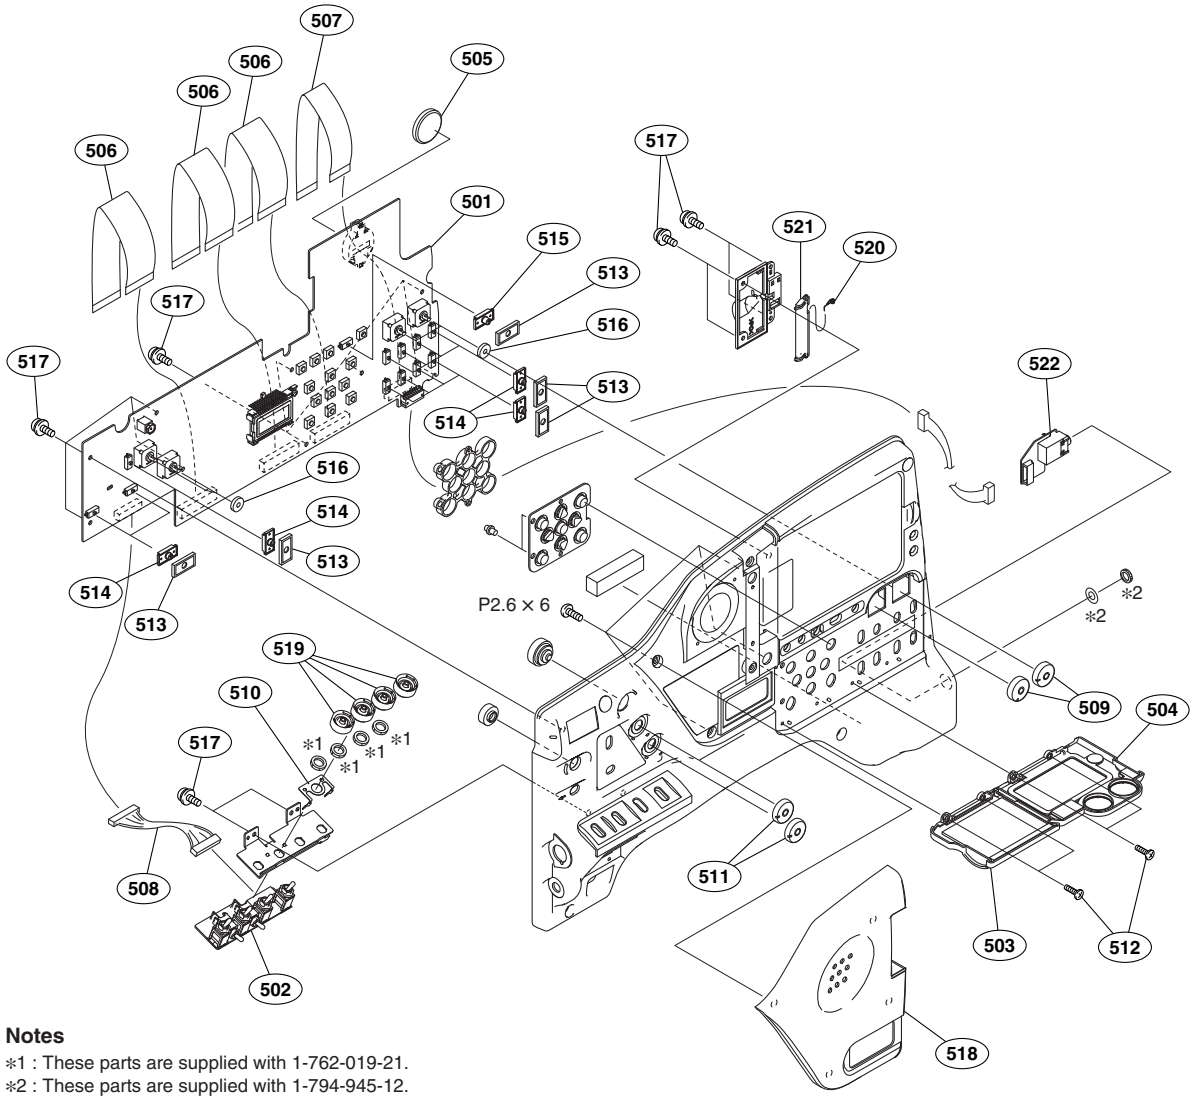

Notes

∗1 : These parts are supplied with 1-762-019-21.
∗2 : These parts are supplied with 1-794-945-12.

No.	Part No.	SP	Description
501	A-1538-885-A	s	MOUNTED CIRCUIT BOARD, FP-157
502	A-1540-101-A	s	MOUNTED CIRCUIT BOARD, SW-1391
503	A-1541-498-A	s	DOOR (L) ASSY, SWITCH
504	A-1541-499-A	s	DOOR (R) ASSY, SWITCH
505	⚠ 1-528-174-31	s	BATTERY, LITHIUM (CR2032 TYPE)
506	1-831-006-11	s	CABLE, FLEXIBLE FLAT (30 CORE)
507	1-835-364-11	s	CABLE, FLEXIBLE FLAT (12 CORE)
508	1-960-886-13	s	HARNESS, SUB (SW1038)
509	3-611-740-03	s	KNOB(2),VR
510	3-629-459-03	o	PLATE,GROUND
511	3-680-219-03	s	KNOB,VR
512	3-719-381-02	s	SCREW (M2X4)
513	3-796-995-01	s	DROP PROTECTION(SW)
514	3-796-996-02	s	KNOB(A),SW
515	3-796-998-01	s	KNOB(B),SW
516	3-797-016-01	s	CUSHION VOLUME AUDIO
517	3-855-938-01	s	SCREW
518	3-870-115-02	s	PAD (L), IN SIDE
519	3-870-137-02	s	CAP, DROP PROTECTION
520	3-870-139-01	s	SPRING, HELICAL TORSION
521	3-868-590-14	s	PLATE BLIND,HINGI
522	A-1550-452-A	s	MOUNTED CIRCUIT BOARD, HP-149
	7-685-133-11	s	SCREW +P 2.6X6 TYPE2

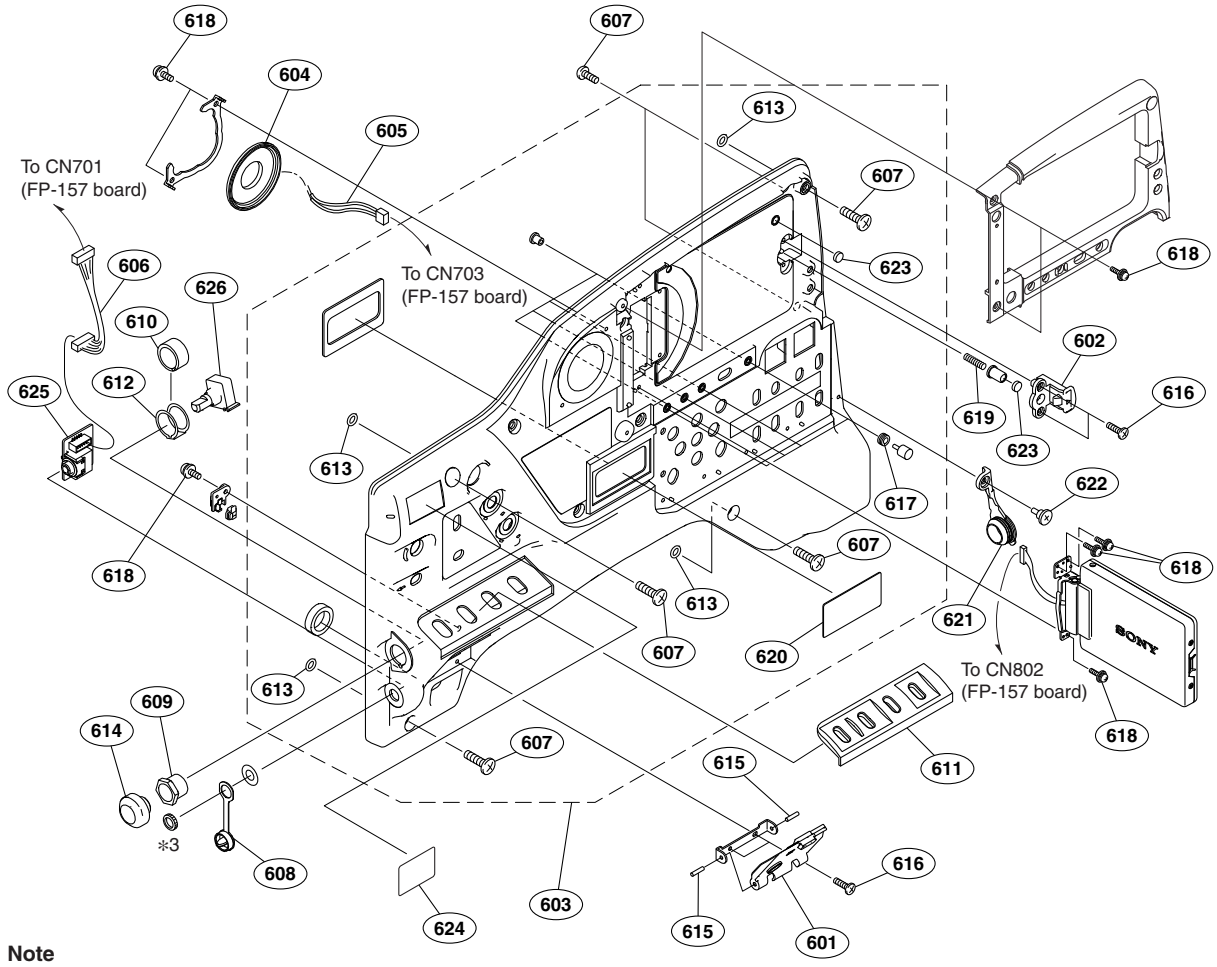


Note

*3 : This part is supplied with 1-507-980-41.


No.	Part No.	SP	Description
601	A-1541-497-B	s	DOOR,ASSY,MS
602	A-1541-500-A	s	LCD LOCK ASSY
603	A-1729-311-A	s	PANEL SUB ASSY, INSIDE
604	1-503-293-12	s	SPEAKER
605	1-960-882-13	s	HARNESS, SUB (SPEAKER)
606	1-960-885-12	o	HARNESS, SUB (HP103)
607	3-603-680-02	s	STAINLESS SCREW +B3X12
608	3-620-733-01	s	COVER HEADHONE JACK
609	3-629-446-04	s	SLEEVE(ENC2)
610	3-629-447-03	o	SLEEVE(ENC1)
611	3-629-768-31	s	ORNAMENTAL PLATE(3),SW,CAMERA
612	3-647-917-02	s	PLATE,EARTH
613	3-672-250-01	s	RING (M2.6), O
614	3-692-111-02	s	KNOB,RE
615	3-703-357-03	s	PIN, PARALLEL (DIA. 1.6X6)
616	3-719-381-02	s	SCREW (M2X4)
617	3-724-758-02	s	RUBBER (PUSH), DROP PROTECTION
618	3-855-938-01	s	SCREW
619	3-868-983-01	s	SPRING,COMPRESSION
620	3-870-096-01	s	WINDOW, TC
621	3-870-140-01	s	COVER, HEADPHONE JACK
622	3-965-077-02	s	SCREW, SPECIAL (M2)
623	3-969-387-01	s	FOOT, RUBBER
624	3-182-055-11	s	LABEL (1), FILTER
625	A-1550-451-A	s	MOUNTED CIRCUIT BOARD, HP-148
626	A-1550-453-A	s	MOUNTED CIRCUIT BOARD, ENC-118

LCD Block

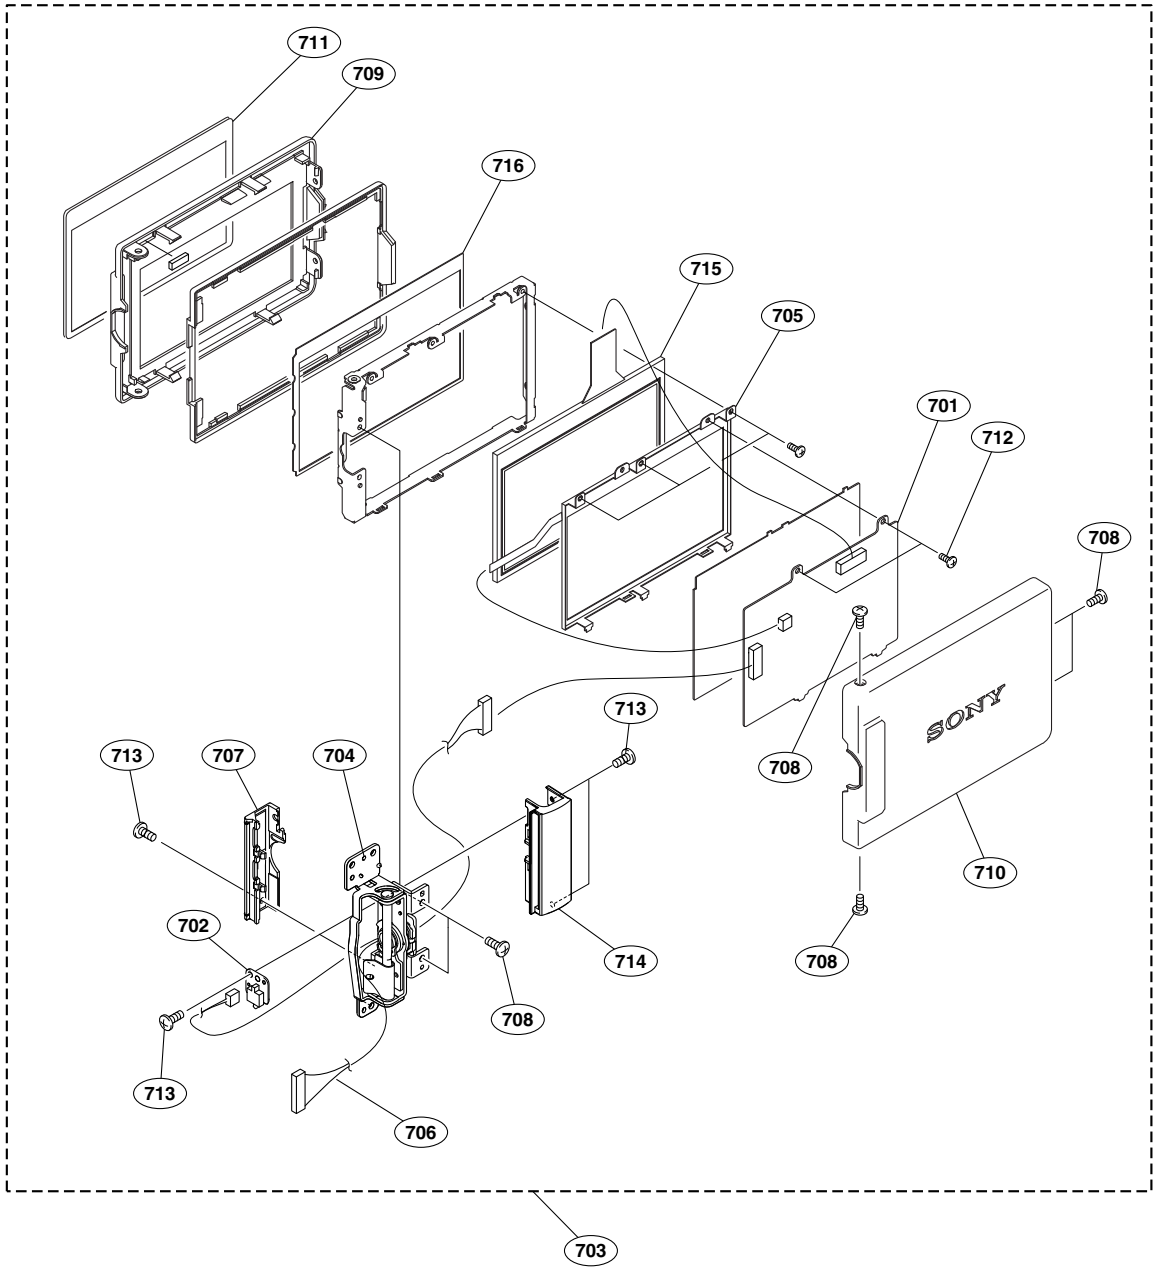
711
709
716
715
705
701
712
708
713
707
704
713
708
710
702
714
708
713
706
703


No.	Part No.	SP	Description
701	A-1540-111-A	s	MOUNTED CIRCUIT BOARD, PD-118
702	A-1540-127-A	s	MOUNTED CIRCUIT BOARD, DET-45
703	A-1557-162-A	s	LCD ASSY
704	X-3950-938-4	s	HINGE ASSY
705	1-478-568-22	s	BLOCK, LIGHT GUIDE PLATE (3.5)
706	1-966-077-11	s	HARNESS, SUB (LCD7)
707	3-060-694-11	s	COVER (REAR), HINGE
708	3-719-381-02	s	SCREW (M2X4)
709	3-870-084-01	s	BEZEL, LCD
710	3-870-085-01	s	COVER, LCD
711	3-870-087-02	s	LCD WINDOW
712	3-968-729-81	s	SCREW (M2), LOCK ACE, P2
713	3-989-735-11	s	SCREW (M1.7), LOCK ACE, P2
714	3-991-265-11	s	(FRONT)COVER HINGI
715	8-753-208-98	s	ACX530AK-1
716	3-991-263-01	s	PACKING,LCD

Handle Block

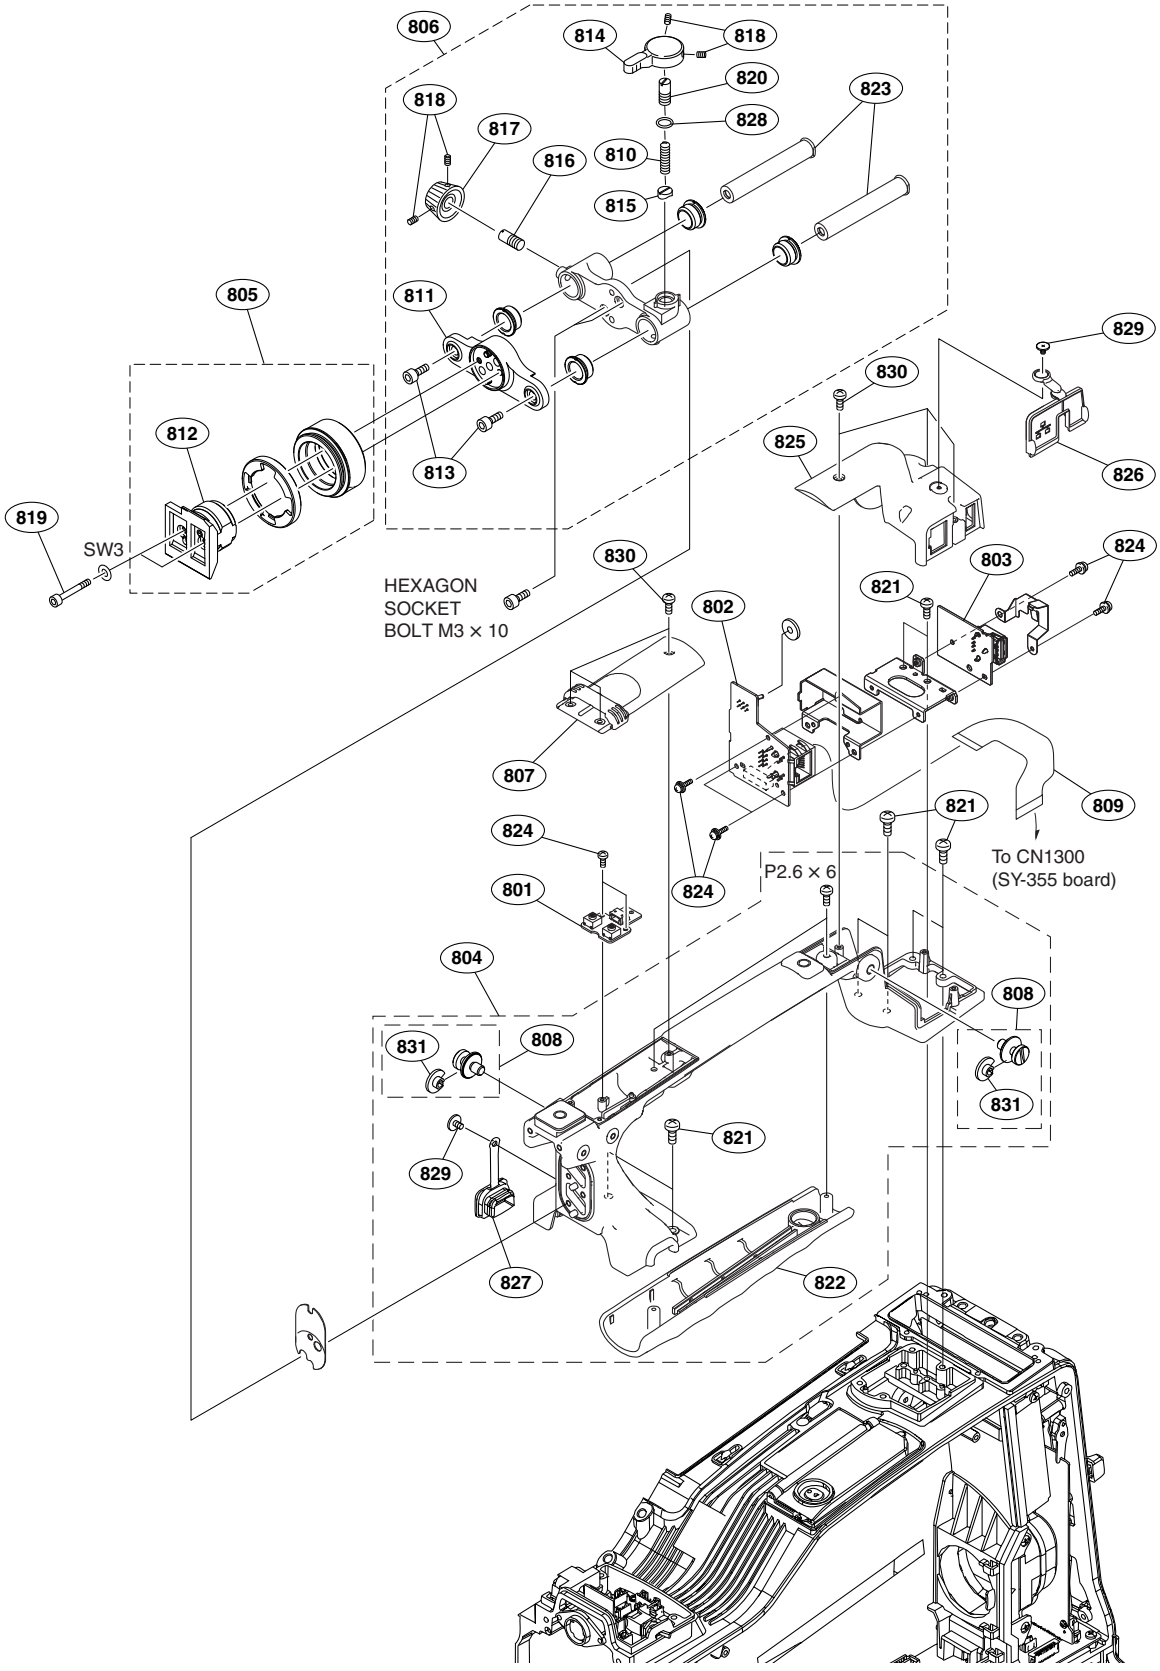


No.	Part No.	SP	Description
801	A-1164-298-A	s	MOUNTED CIRCUIT BOARD, SW-1249
802	A-1538-881-A	s	MOUNTED CIRCUIT BOARD, CN-2946
803	A-1540-099-A	s	MOUNTED CIRCUIT BOARD, CN-3026
804	A-1541-491-A	s	HANDLE SUB ASSY
805	A-8278-412-J	s	SHOE ASSY,VF
806	A-8279-413-G	s	SLIDE ASSY(LB),VF
807	X-3608-704-2	s	COVER ASSY,HANDLE
808	X-3710-037-1	s	SUSPENSION ASSY (C)
809	1-876-959-11	s	FPC (ETHER)
810	3-612-822-01	s	SPRING,COMPRESSION
811	3-617-745-04	s	FIXED TABLE(WS),VF SHOE
812	3-627-853-07	s	SHOE,SLIDE
813	3-657-705-91	s	BOLT (M4X8), HEXAGON HOLE
814	3-673-046-21	s	LEVER, LOCK
815	3-679-702-11	s	CUSION,STOPPER
816	3-690-660-02	s	LOCK,SCREW
817	3-690-674-02	s	KNOB,LOCK
818	3-701-507-01	s	SET SCREW, DOUBLE POINT,(M3X5)
819	3-711-765-01	s	BOLT (M3), HEXAGON SOCKET
820	3-711-794-12	s	PIN, STOPPER
821	3-742-074-13	s	SCREW (+B 3X8)
822	3-796-975-02	s	COVER BOTTOM,HANDLE
823	3-826-074-01	s	PIPE,VF SLIDE
824	3-855-938-01	s	SCREW
825	3-870-200-02	s	COVER, TALLY
826	3-870-237-03	s	COVER (HANDLE), CONNECTOR
827	3-877-892-01	s	LIGHT CONNECTOR COVER
828	3-895-622-01	s	RING (DIA. 5), O
829	3-965-077-02	s	SCREW, SPECIAL (M2)
830	4-654-273-02	s	ACE (M2), LOCK
831	3-654-615-02	s	COLLAR, SUSPENSION
	7-623-208-22	s	SW 3,TYPE 2
	7-683-405-04	s	BOLT,HEXAGON SOCKET 3X10
	7-685-133-11	s	SCREW +P 2.6X6 TYPE2

Connector Panel

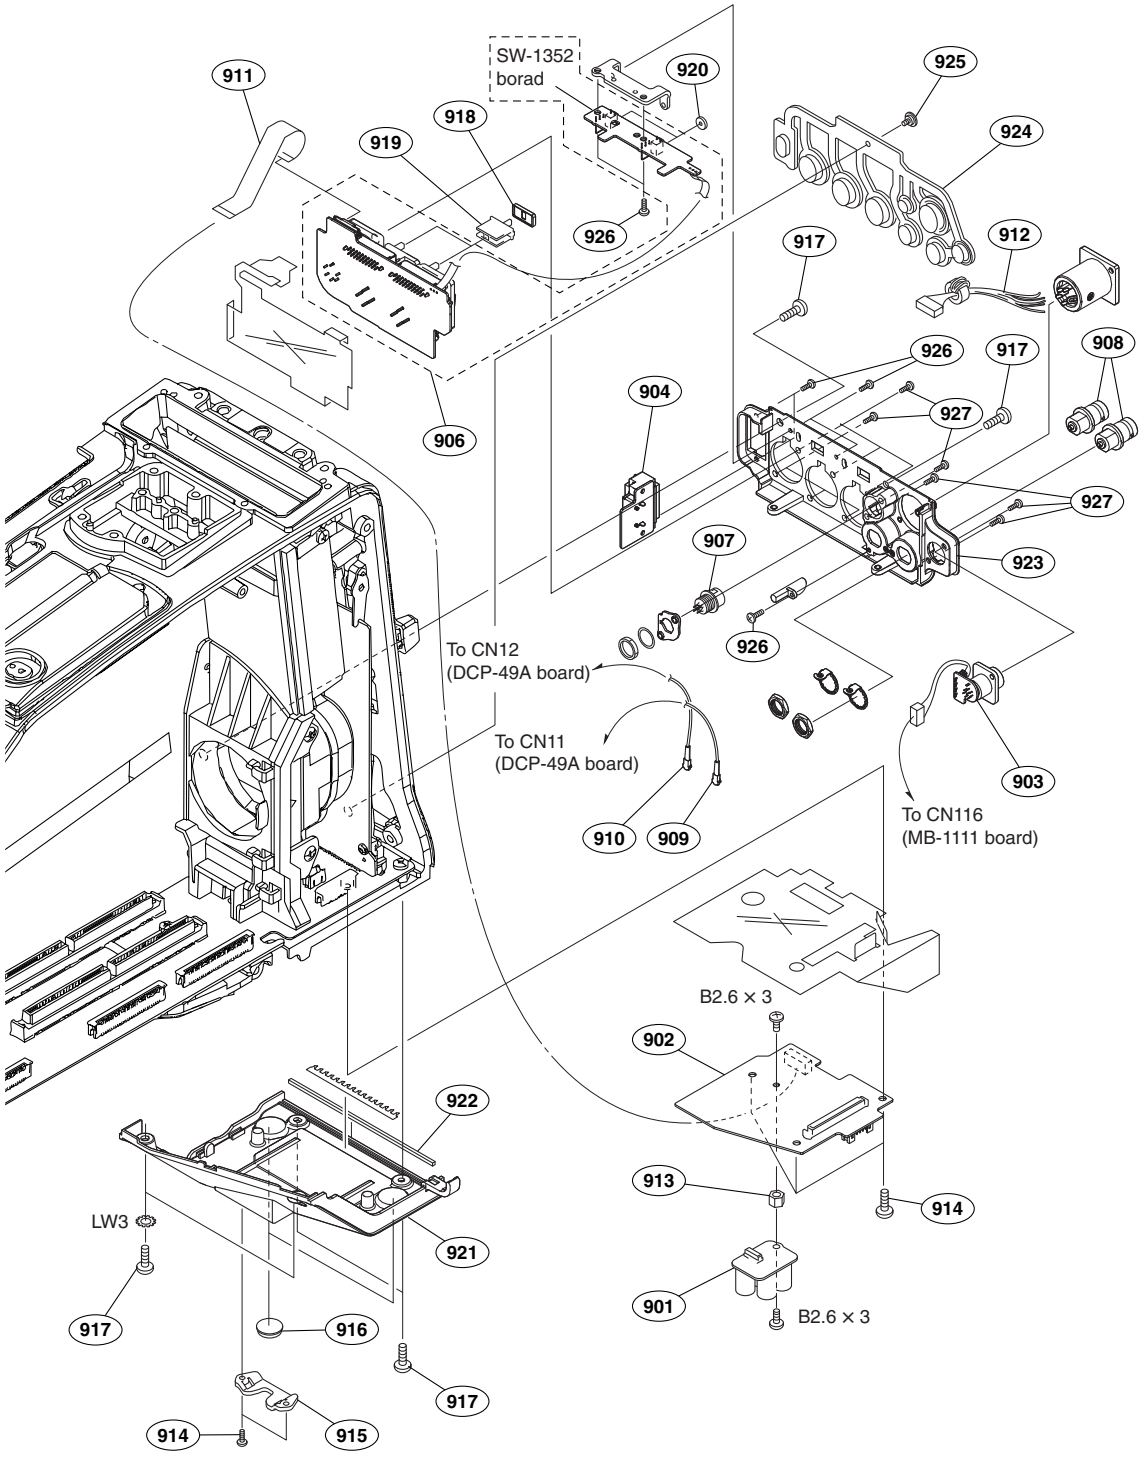


No.	Part No.	SP	Description
901	A-1164-283-A	s	MOUNTED CIRCUIT BOARD, PS-708
902	A-1538-882-A	s	MOUNTED CIRCUIT BOARD, CNB-25
903	A-1540-121-A	s	MOUNTED CIRCUIT BOARD, RM-216
904	A-1540-123-A	s	MOUNTED CIRCUIT BOARD, CN-2948
906	A-1545-896-A	s	MOUNTED CIRCUIT BOARD, AXM-38
907	1-565-072-12	s	CONNECTOR, ROUND TYPE (RF) 4P
908	1-784-240-11	s	CONVERTER, COAXIAL CONNECTOR
909	1-835-367-11	s	CABLE ASSEMBLY, COAXIAL
910	1-835-368-11	s	CABLE ASSEMBLY, COAXIAL
911	1-876-957-11	s	FPC (CNB-AXM)
912	1-966-081-11	s	HARNESS, SUB (DCIN2)
913	2-534-514-02	o	SUPPORT (1)
914	3-364-941-01	s	SCREW (+B) (2.6X5), NYLOK
915	3-626-781-03	s	STOPPER
916	3-723-097-01	o	FOOT, RUBBER
917	3-742-074-13	s	SCREW (+B 3X8)
918	3-796-985-02	s	CUSHION,DROP PROTECTION
919	3-796-986-01	s	KNOB,SLIDE SW
920	3-796-993-01	s	CUSION DROP PROTEICTION TOGGLE
921	3-870-172-01	s	COVER, CONNECTOR
922	3-870-173-01	s	RUBBER, SHIELD
923	3-870-174-03	s	PANEL, CONNECTOR
924	3-870-246-03	s	COVER (XLR), DROP PROTECTION
925	3-965-077-02	s	SCREW, SPECIAL (M2)
926	4-654-273-02	s	ACE (M2), LOCK
927	4-674-315-01	s	SCREW (M2.6X6)
	7-621-775-08	s	SCREW +B 2.6X3
	7-623-308-07	s	LW3, TYPE (A)

Rear Panel

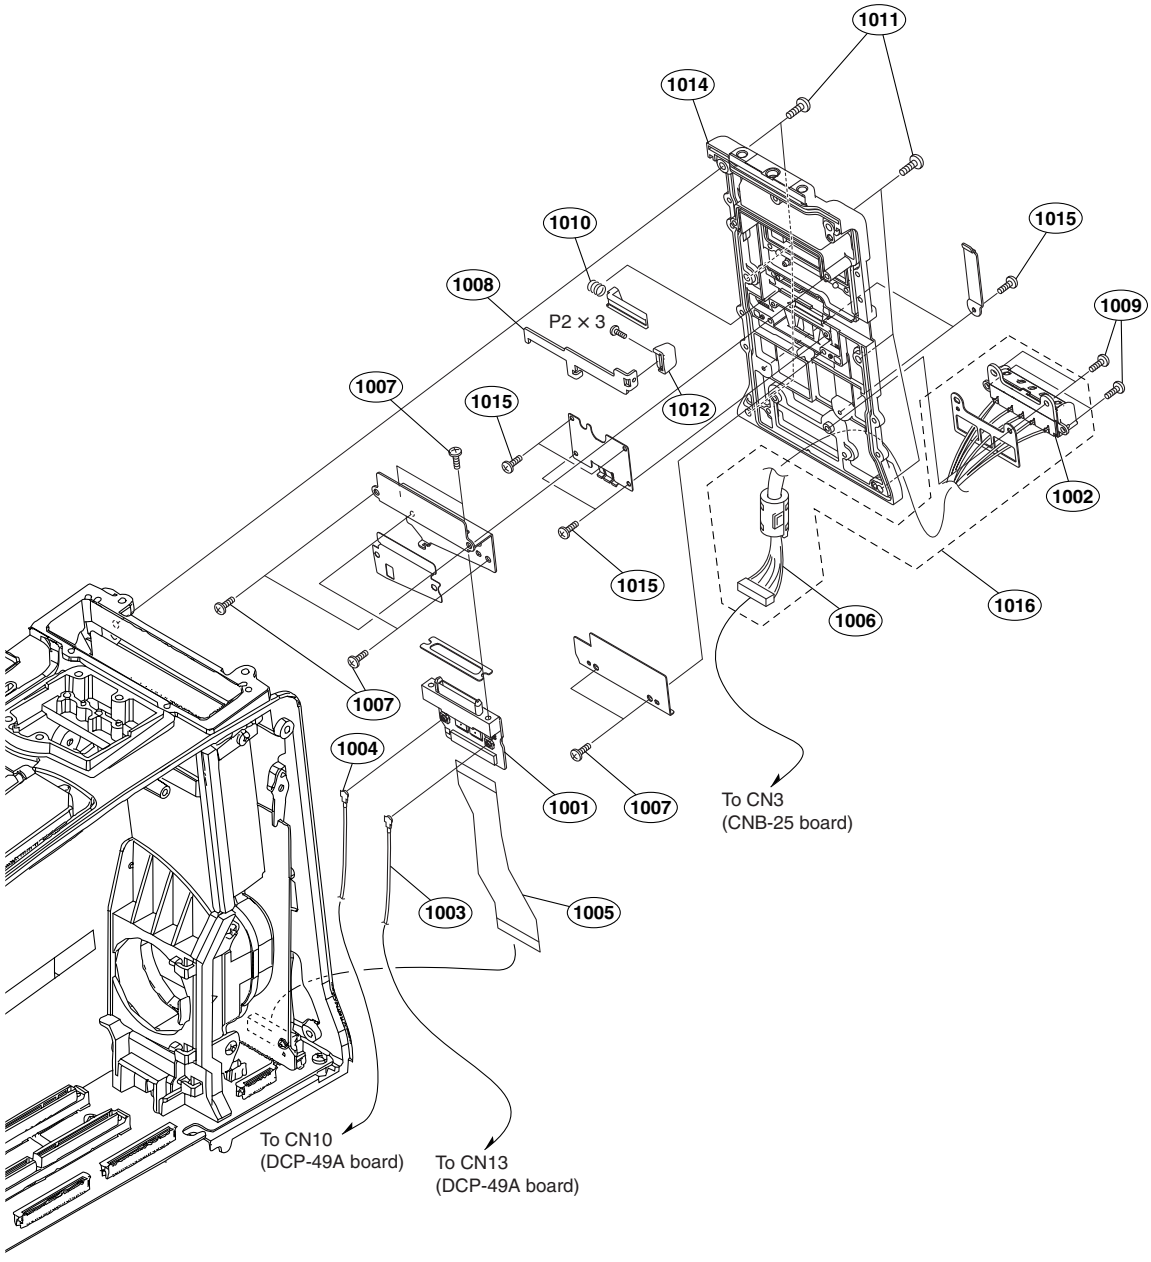
1011
1014
1010
1015
1008
P2 × 3
1009
1007
1015
1012
1002
1015
1016
1006
1007
1004
1001
1007
To CN3
(CNB-25 board)
1003
1005
To CN10
(DCP-49A board)
To CN13
(DCP-49A board)


No.	Part No.	SP	Description
1001	A-1540-087-B	s	MOUNTED CIRCUIT BOARD, CI-37
1002	1-820-459-21	s	CONNECTOR, BATTERY
1003	1-835-366-11	s	CABLE ASSEMBLY, COAXIAL
1004	1-835-365-11	s	CABLE ASSEMBLY, COAXIAL
1005	1-876-961-11	s	FPC (CI)
1006	1-966-082-11	s	HARNESS, SUB (BATT3)
1007	3-364-941-01	s	SCREW (+B) (2.6X5), NYLOK
1008	3-679-688-03	s	LEVER,RELEASE
1009	3-694-181-03	s	TYPE1,AROCK PRECISION +P2.6X5
1010	3-704-964-01	s	SPRING,COMPRESSION
1011	3-742-074-13	s	SCREW (+B 3X8)
1012	3-796-949-01	s	KNOB,RELEASE LEVER
1014	3-870-163-02	s	PANEL, REAR
1015	4-654-273-02	s	ACE (M2), LOCK
1016	A-1558-293-B	s	HARNESS ASSY, BATT
	7-627-553-38	s	SCREW,PRECISION +P 2X3

Chassis 1

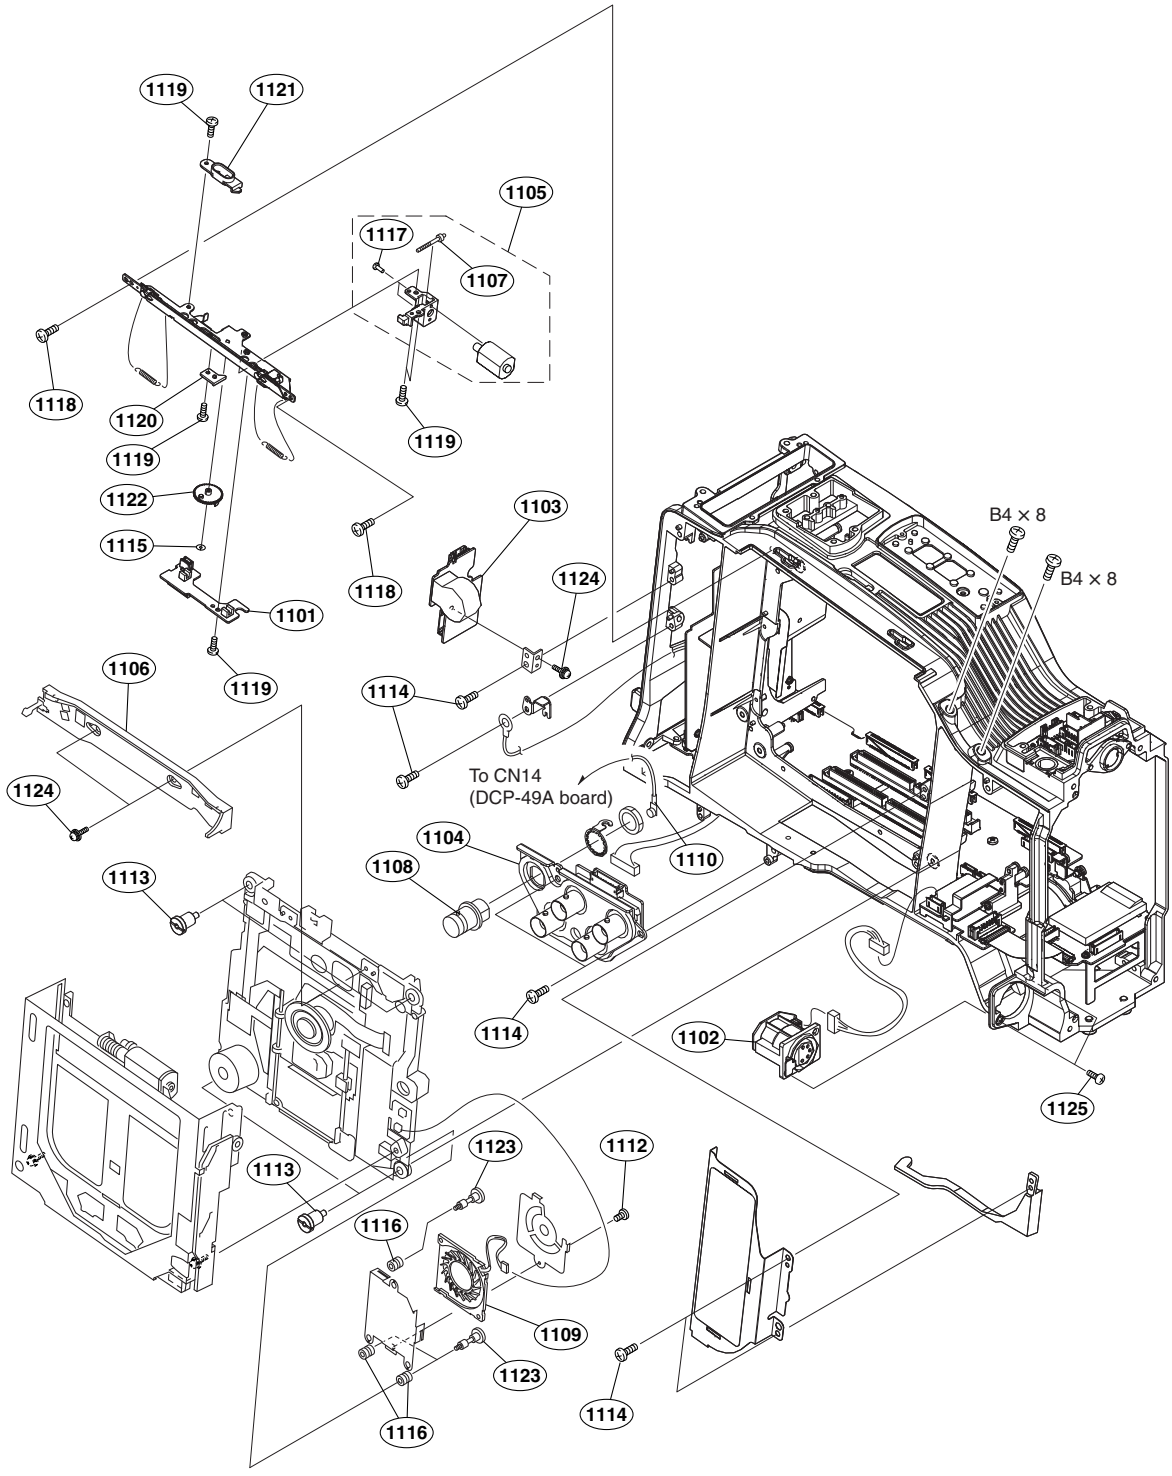
1119
1121
1105
1117
1107
1118
1120
1119
1119
1122
1103
1115
1118
1124
1101
1119
1106
1114
1124
To CN14
(DCP-49A board)
1104
1108
1110
1113
1114
1102
1125
1123
1112
1113
1116
1109
1123
1114
1116
B4 × 8
B4 × 8


No.	Part No.	SP	Description
1101	A-1317-214-A	s	MOUNTED CIRCUIT BOARD, SW-1385
1102	A-1540-095-A	s	MOUNTED CIRCUIT BOARD, CN-3001
1103	A-1540-112-A	s	MOUNTED CIRCUIT BOARD, PS-731
1104	A-1540-124-A	s	MOUNTED CIRCUIT BOARD, IO-235
1105	A-8279-912-B	s	MOTOR SUB ASSY,LD
1106	X-2187-621-3	s	GUARD 2 ASSY, SW
1107	X-3945-435-3	s	SHAFT (12) ASSY, WORM
1108	1-784-240-11	s	CONVERTER, COAXIAL CONNECTOR
1109 ⚠	1-787-645-12	s	D.C. FAN (35 SQUARE)
1110	1-835-369-11	s	CABLE ASSEMBLY, COAXIAL
1112	2-635-562-11	s	SCREW(M1.7)
1113	3-277-093-01	s	SCREW(DIA.9), STEP
1114	3-364-941-01	s	SCREW (+B) (2.6X5), NYLOK
1115	3-559-408-11	s	WASHER, POLYETHYLENE, DIA.1.2
1116	3-617-812-01	s	VIBRATION PROOF,RUBBER
1117	3-703-816-45	s	SCREW (M1.4X2.5), SPECIAL HEAD
1118	3-968-729-81	s	SCREW (M2), LOCK ACE, P2
1119	3-729-076-11	s	SCREW (+B) (2X4)
1120	3-797-030-01	s	ARM,RELEASE
1121	3-797-031-03	s	GUIDE,EJECT
1122	3-797-063-03	s	GEAR,RELEASE
1123	3-825-467-02	s	SCREW,STEP
1124	3-855-938-01	s	SCREW
1125	4-674-315-01	s	SCREW (M2.6X6)
	7-682-561-09	s	SCREW +B 4X8

Chassis 2

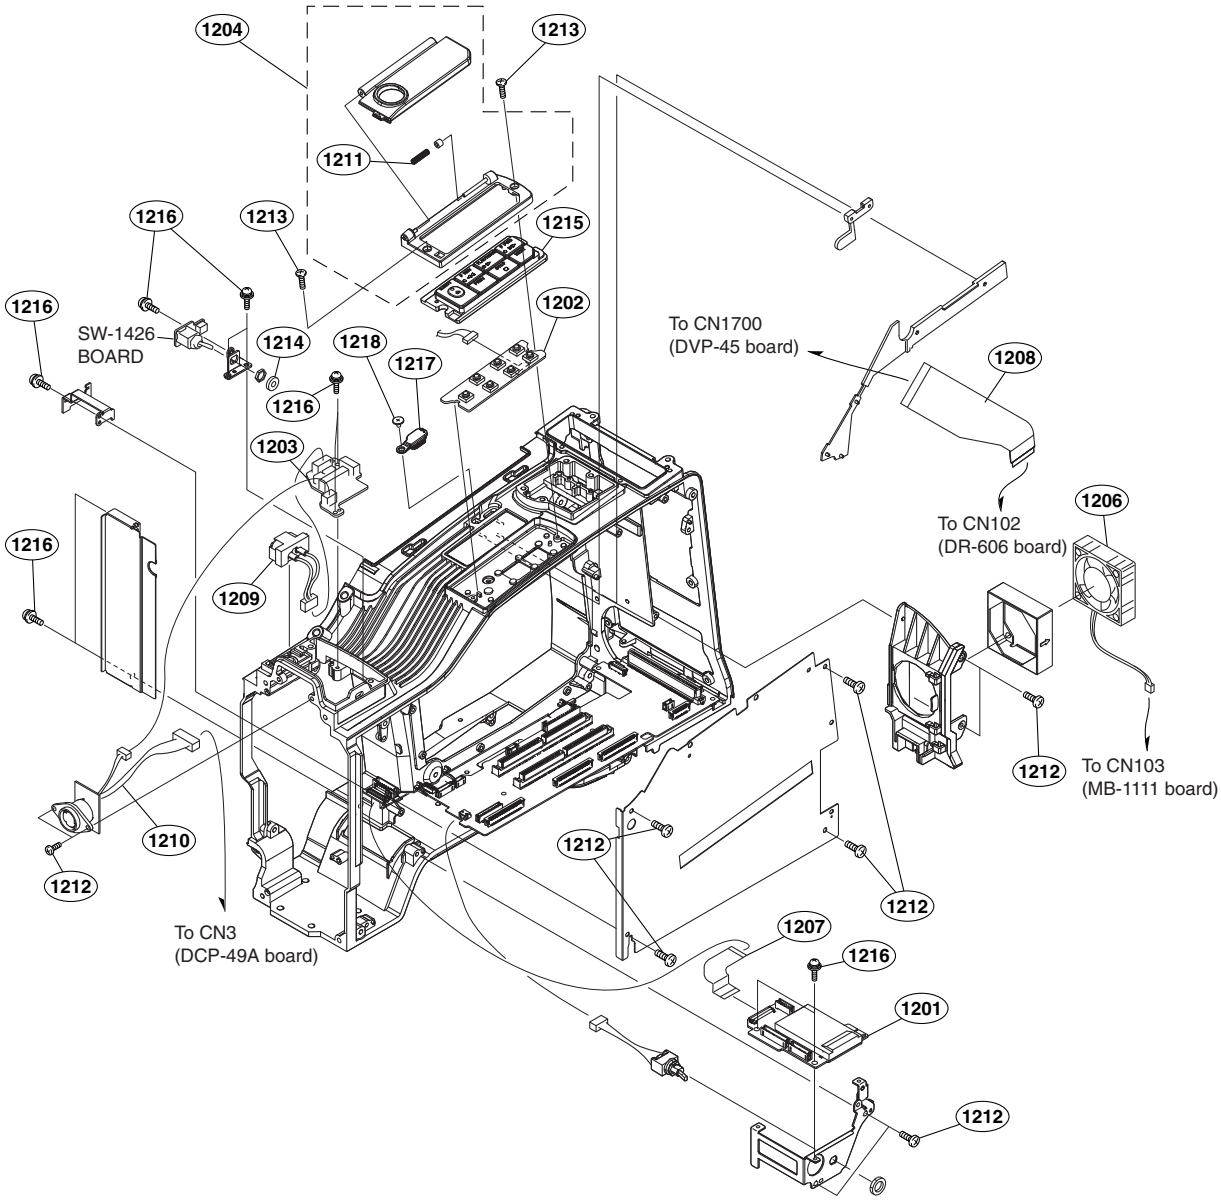
1204
1213
1211
1216
1213
1215
1216
SW-1426
BOARD
1214
1218
1217
1202
1216
1203
To CN1700
(DVP-45 board)
1208
To CN102
(DR-606 board)
1206
1216
1209
1212
To CN103
(MB-1111 board)
1210
1212
1212
To CN3
(DCP-49A board)
1212
1207
1216
1201
1212


No.	Part No.	SP	Description
1201	A-1540-096-A	s	MOUNTED CIRCUIT BOARD, MS-86
1202	A-1540-109-A	s	MOUNTED CIRCUIT BOARD, KY-623
1203	A-1540-118-A	s	MOUNTED CIRCUIT BOARD, CN-3005
1204	A-1541-496-A	s	KEY FRAME ASSY
1206 ⚠	1-787-070-21	s	FAN, DC (41 SQUARE)
1207	1-876-958-11	s	FPC (MS)
1208	1-876-960-11	s	FPC (ATA)
1209	1-964-607-11	s	HARNESS, SUB (DDOUTLGT)
1210	1-966-070-12	s	HARNESS (VF)
1211	3-234-710-01	o	SPRING (OPEN),COMPRESSION COIL
1212	3-364-941-01	s	SCREW (+B) (2.6X5), NYLOK
1213	4-654-273-02	s	ACE (M2), LOCK
1214	3-796-980-02	s	DROP PROTECTION(LIGHT)
1215	3-797-024-02	s	COVER,KEY SW
1216	3-855-938-01	s	SCREW
1217	3-870-253-02	s	CAP ME
1218	3-965-077-02	s	SCREW, SPECIAL (M2)

Chassis 3

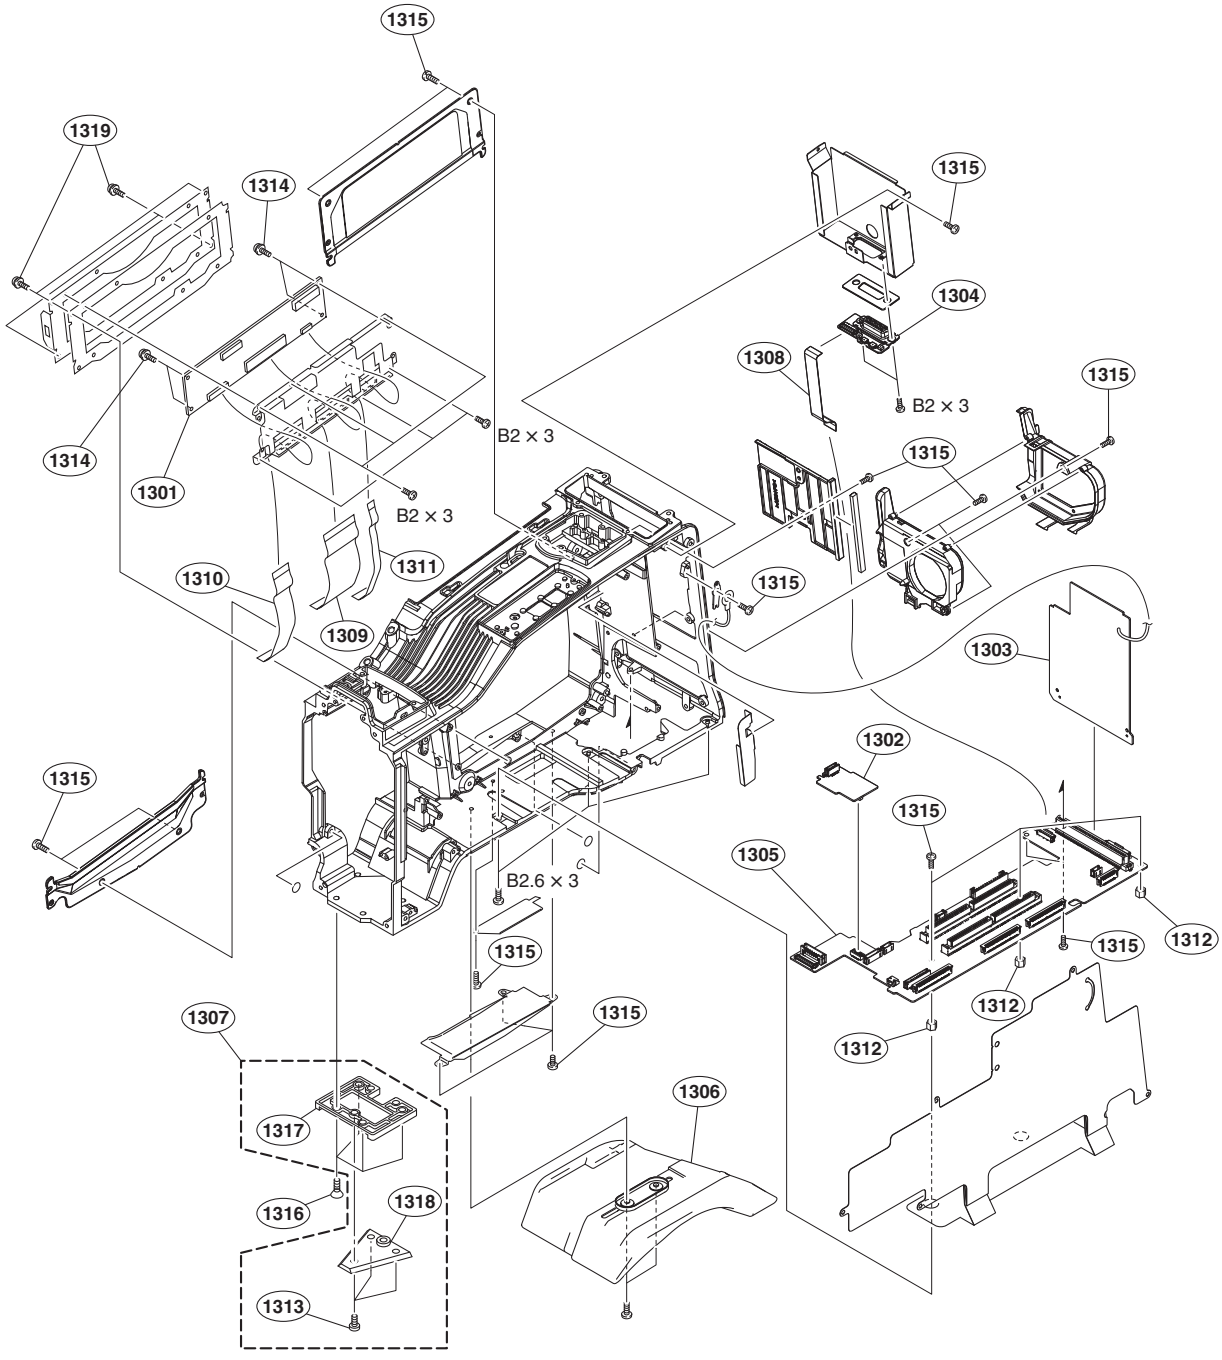

1315
1319
1314
1315
1304
1308
1315
B2 × 3
1314
1301
B2 × 3
1315
B2 × 3
1311
1310
1315
1309
1303
1302
1315
1315
1305
B2.6 × 3
1315
1312
1315
1307
1312
1315
1312
1306
1317
1316
1318
1313

No.	Part No.	SP	Description
1301	A-1418-765-A	s	DR-606(P100)COMPL(RP)
1302	A-1538-886-A	s	MOUNTED CIRCUIT BOARD, MA-162
1303	A-1538-887-A	s	MOUNTED CIRCUIT BOARD, RE-246
1304	A-1540-094-A	s	MOUNTED CIRCUIT BOARD, RX-101
1305	A-1540-107-A	s	MOUNTED CIRCUIT BOARD, MB-1111
1306	A-8279-878-G	s	PAD ASSY,SHOULDER
1307	A-8279-993-C	s	SHOE(D)ASSY,V
1308	1-831-111-11	s	CABLE, FLEXIBLE FLAT (24 CORE)
1309	1-875-555-11	s	FPC(DR-OP)P100
1310	1-875-556-11	s	FPC(DR-SE857)P100
1311	1-875-557-11	s	FPC(DR-SE858)P100
1312	2-534-514-02	o	SUPPORT (1)
1313	3-271-563-01	s	SCREW +P M4X6
1314	3-286-141-01	s	+PSW 2X4
1315	3-364-941-01	s	SCREW (+B) (2.6X5), NYLOK
1316	3-729-072-02	s	SCREW, +K (4X8)
1317	3-854-769-02	s	SHOE(D),CAMERA
1318	3-854-770-02	s	WEDGE(D),MOUNTING
1319	3-855-938-01	s	SCREW
	7-621-772-08	s	SCREW +B 2X3
	7-621-775-08	s	SCREW +B 2.6X3

Loader Block

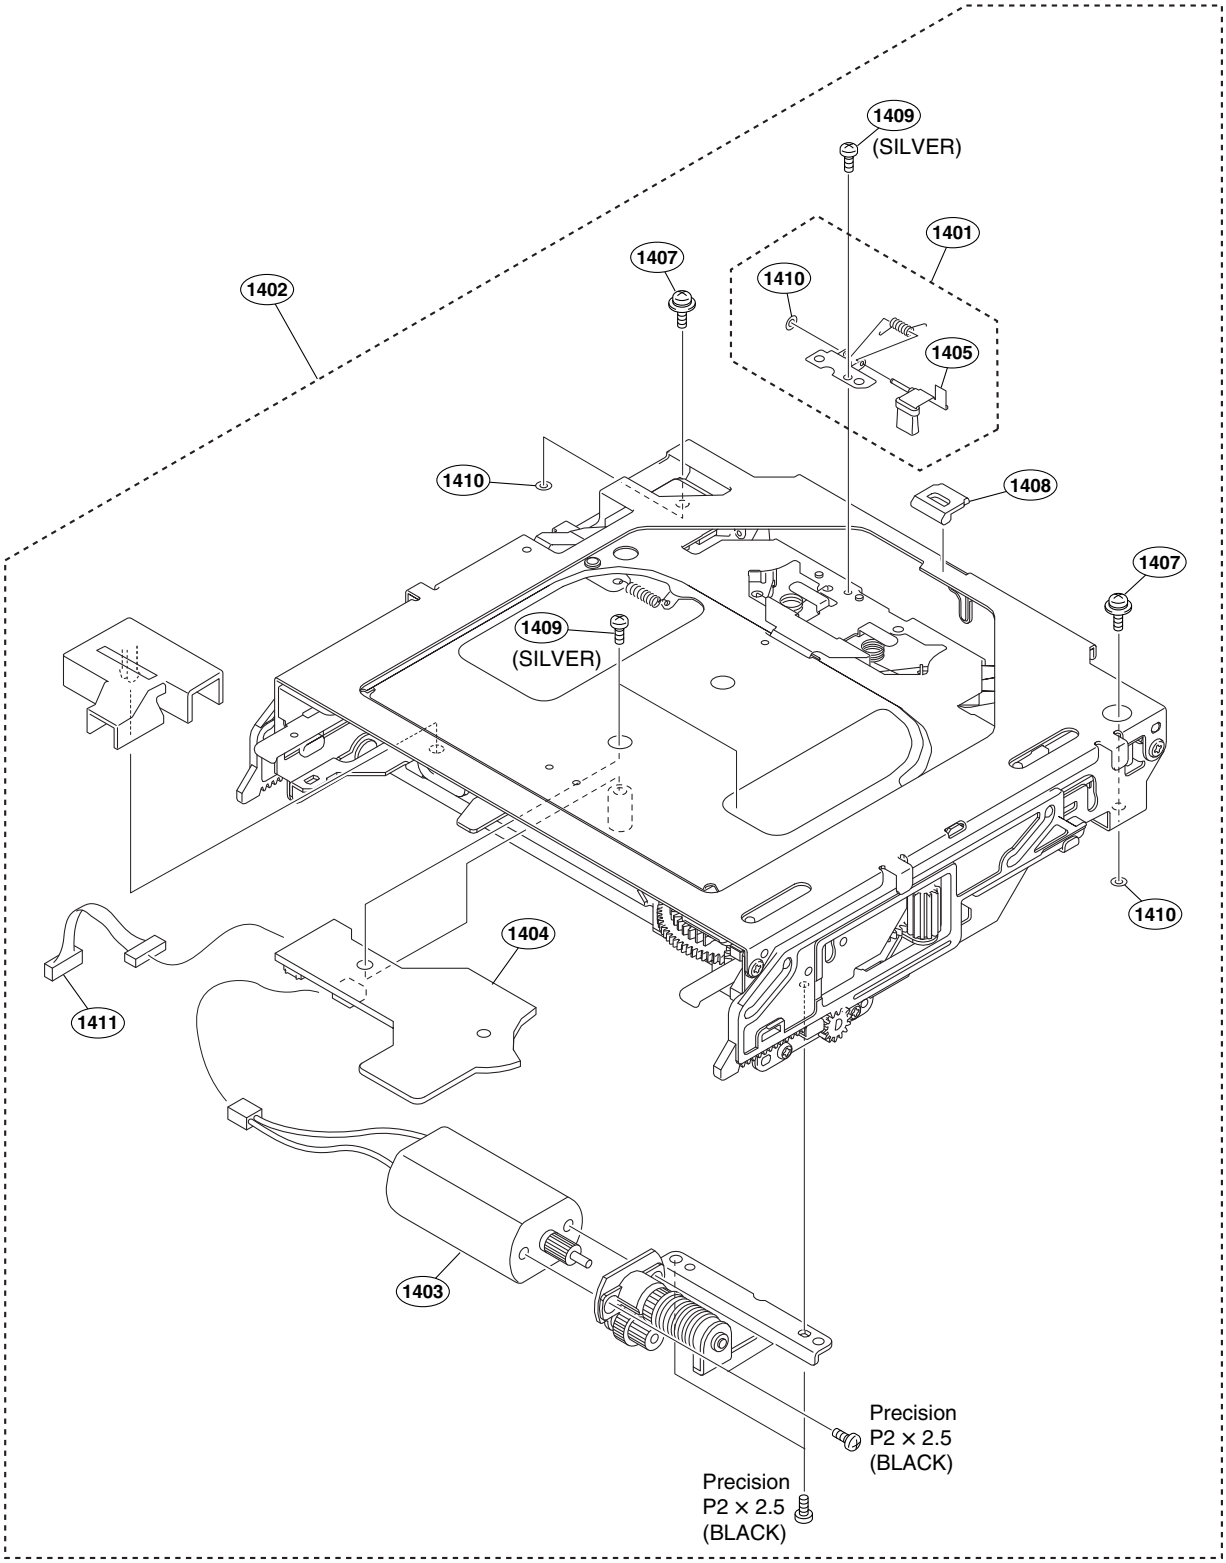


No.	Part No.	SP	Description
1401	A-1256-291-A	s	CLEANER (P100) ASSY
1402	A-1256-958-C	s	LOADER (P100) ASSY (RP)
1403	A-8347-267-A	s	MOTOR (P1) ASSY, LOADING
1404	A-8347-272-A	s	MOUNTED CIRCUIT BOARD, SE-709
1405	X-2177-881-2	s	BRACKET ASSY,BRUSH
1407	2-640-315-02	o	SCREW (M2X5), SMALL, +P, SW
1408	3-197-718-03	s	CL SPACER
1409	3-624-231-01	s	SCREW M2,SPECIAL
1410	3-669-465-01	s	WASHER (1.5), STOPPER
1411	1-962-531-12	s	HARNESS, SUB (HN292-SE709)
	7-627-854-08	s	PRECISION SCREW +P 2X2.5 TYPE3

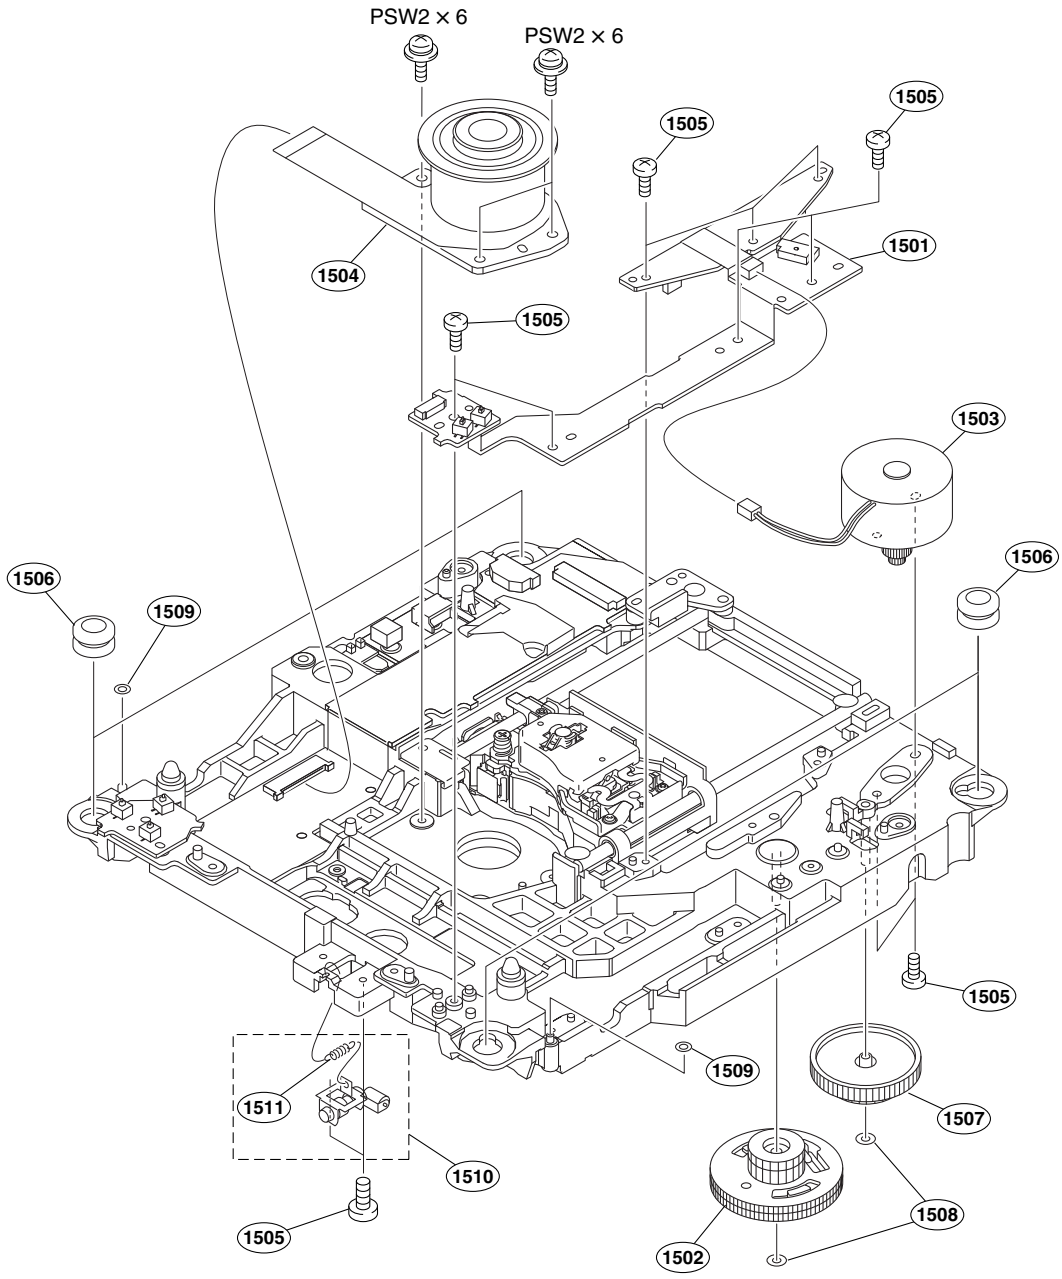

No.	Part No.	SP	Description
1501	A-1366-120-A	s	PRINTED WIRING BOARD, SE-858
1502	A-1369-355-A	s	GEAR ASSY, NO.3
1503	A-1374-689-A	s	MOTOR ASSY, SEEK
1504	⚠ 1-787-046-92	s	MOTOR, DC (SPINDLE)
1505	2-635-562-11	s	SCREW(M1.7)
1506	3-277-087-01	s	DAMPER
1507	3-277-224-01	s	GEAR, HELICAL, NO.2
1508	3-669-465-01	s	WASHER (1.5), STOPPER
1509	3-854-705-01	s	SPACER LD
1510	A-1368-046-A	s	ME ASSY
1511	3-796-403-01	s	SPRING (ME), EXTENSION
	7-628-000-05	s	+PSW 2X6

Drive Block 2

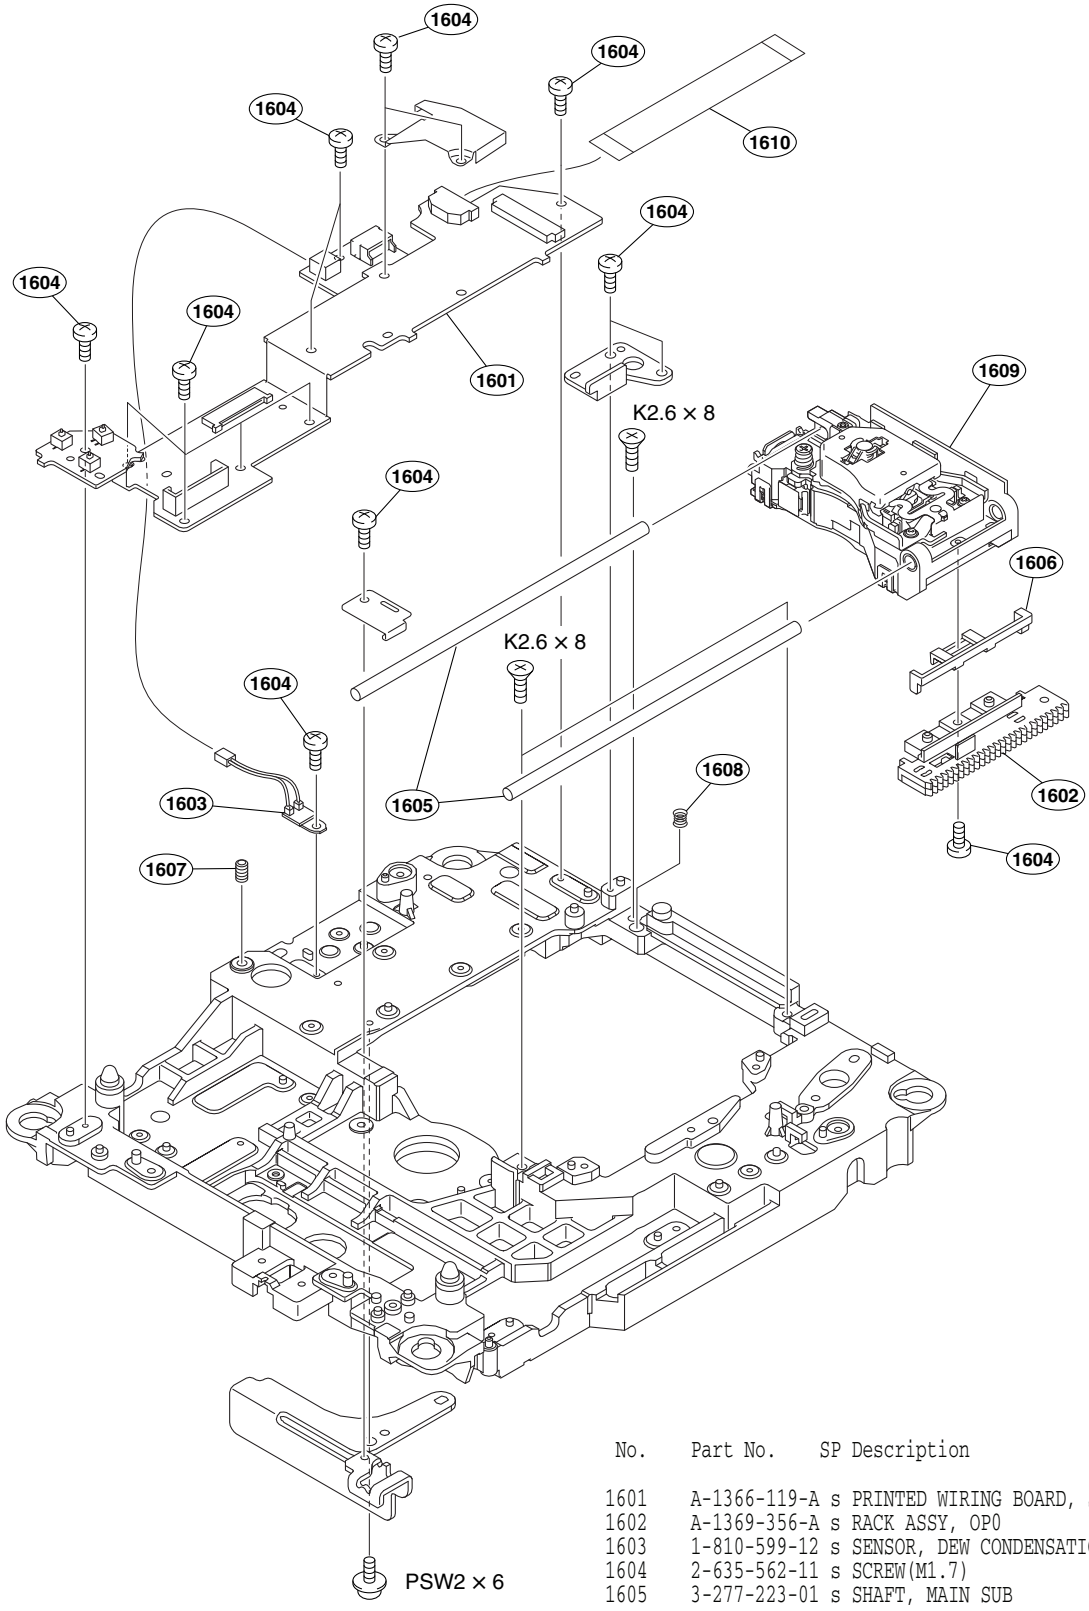

No.	Part No.	SP	Description
1601	A-1366-119-A	s	PRINTED WIRING BOARD, SE-857
1602	A-1369-356-A	s	RACK ASSY, OP0
1603	1-810-599-12	s	SENSOR, DEW CONDENSATION
1604	2-635-562-11	s	SCREW(M1.7)
1605	3-277-223-01	s	SHAFT, MAIN SUB
1606	3-277-227-01	s	RUBBER, STOPPER, OP
1607	3-277-388-01	s	SCREW, ADJUST, M2.6
1608	3-796-307-01	s	SPRING(SKEW),COMPRESSION
1609	⚠ 8-820-389-02	s	DEVICE, OPTICAL KES-330A/J1RP
1610	1-874-831-11	s	FPC((P100)LOADER)
	7-621-592-10	s	SCREW +K 2.6X8
	7-628-000-05	s	+PSW 2X6

1-3. Electrical Parts List

AT-177 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1538-880-A	s	MOUNTED CIRCUIT BOARD, AT-177
C100	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C101	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C102	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C103	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C104	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C105	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C106	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C107	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C108	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C109	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C110	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C200	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C201	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C202	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C203	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C204	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C205	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C206	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C207	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C208	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C209	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C210	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C211	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C213	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C214	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C216	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C217	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C219	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C220	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C221	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C222	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C223	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C224	1-164-862-81	s	CAP, CHIP CERAMIC 33PF CH 1005
C225	1-164-870-81	s	CAP, CHIP CERAMIC 68PF CH 1005
C226	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C227	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C228	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C229	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C230	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C231	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C232	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C233	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C234	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C235	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C236	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C300	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C301	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C302	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C303	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C304	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C305	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C306	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C307	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C308	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C309	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C310	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C311	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(AT-177 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C312	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C313	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C314	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C400	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C402	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C403	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C404	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C405	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C406	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C407	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C408	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C409	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C410	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C411	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C412	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C413	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C414	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C415	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C416	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C417	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C418	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C419	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C420	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C421	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C422	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C425	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C426	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C427	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C428	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C429	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C430	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C431	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C432	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C433	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C500	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C501	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C502	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C503	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C504	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C505	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C506	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C507	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C508	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C509	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C510	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C511	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C512	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C513	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C514	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C515	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C516	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C517	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C518	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C519	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C520	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C521	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C522	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C523	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C601	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(AT-177 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C602	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C604	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C605	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C611	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C614	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C616	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C619	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C621	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C622	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C632	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C633	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C634	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C635	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C636	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
CN601	1-818-579-91	s	CONNECTOR, BOARD TO BOARD(60P)
CN602	1-580-789-21	s	PIN, CONNECTOR (SMD) 6P
D500	8-719-989-04	s	DIODE DAN222-TL
D501	8-719-989-04	s	DIODE DAN222-TL
D502	8-719-989-04	s	DIODE DAN222-TL
D600	8-719-989-04	s	DIODE DAN222-TL
E100	1-535-877-22	s	CHIP, CHECKER
E101	1-535-877-22	s	CHIP, CHECKER
E102	1-535-877-22	s	CHIP, CHECKER
E103	1-535-877-22	s	CHIP, CHECKER
FB100	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB500	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB501	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
IC100	6-704-099-01	s	IC TC7WZ08FK(TE85R)
IC101	8-759-656-54	s	IC TC7WH14FK(TE85R)
IC102	8-759-392-77	s	IC SN74LVC245APWR
IC103	8-759-392-77	s	IC SN74LVC245APWR
IC104	8-759-392-77	s	IC SN74LVC245APWR
IC200	6-704-099-01	s	IC TC7WZ08FK(TE85R)
IC201	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC202	8-759-683-24	s	IC MAX821RUS+TG069
IC203	6-702-879-01	s	IC R3112N281A-TR-FA
IC207	6-706-879-01	s	IC TPS62020DRCR
IC210	8-759-337-40	s	IC NJM2904V(TE2)
IC211	8-759-337-40	s	IC NJM2904V(TE2)
IC212	8-759-337-40	s	IC NJM2904V(TE2)
IC301	8-759-675-54	s	IC TC7W53FK(TE85R)
IC307	8-759-669-43	s	IC SN74LVC157APWR-12
IC311	8-759-679-55	s	IC SN74LVC08APWR
IC312	8-759-679-55	s	IC SN74LVC08APWR
IC400	8-759-392-77	s	IC SN74LVC245APWR
IC402	6-600-060-01	s	IC TC7WZ32FK(TE85R)
IC403	8-759-825-66	s	IC SN74LVC139APWR
IC404	6-600-060-01	s	IC TC7WZ32FK(TE85R)
IC405	8-759-669-44	s	IC SN74LVC74APWR-12
IC406	8-759-598-44	s	IC TC7WH08FK(TE85R)
IC407	8-759-669-42	s	IC SN74LVC138APWR-12
IC408	6-702-319-01	s	IC TC7WZ04FK(TE85R)
IC409	8-759-656-54	s	IC TC7WH14FK(TE85R)
IC410	8-752-392-03	s	IC CXD1095BR
IC411	8-759-594-17	o	IC CXD9093R
IC412	6-704-099-01	s	IC TC7WZ08FK(TE85R)
IC413	6-704-099-01	s	IC TC7WZ08FK(TE85R)

(AT-177 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC414	6-704-099-01	s	IC TC7WZ08FK(TE85R)
IC415	8-759-669-44	s	IC SN74LVC74APWR-12
IC416	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC417	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC418	8-759-592-44	s	IC TC7SZ04FU(TE85R)
IC419	8-759-392-77	s	IC SN74LVC245APWR
IC420	8-759-680-48	s	IC TC7WH157FK(TE85R)
IC500	8-759-680-48	s	IC TC7WH157FK(TE85R)
IC501	6-600-060-01	s	IC TC7WZ32FK(TE85R)
IC502	8-759-675-54	s	IC TC7W53FK(TE85R)
IC503	8-759-679-55	s	IC SN74LVC08APWR
IC504	8-759-656-54	s	IC TC7WH14FK(TE85R)
IC505	8-759-680-48	s	IC TC7WH157FK(TE85R)
IC506	6-701-905-01	s	IC AM26C31CDBR
IC507	6-705-514-01	s	IC MAX3222IPWR
IC508	6-704-099-01	s	IC TC7WZ08FK(TE85R)
IC509	8-759-675-54	s	IC TC7W53FK(TE85R)
IC510	8-759-592-48	s	IC TC7SZ32FU(TE85R)
IC511	8-759-680-48	s	IC TC7WH157FK(TE85R)
IC512	6-702-319-01	s	IC TC7WZ04FK(TE85R)
IC601	6-600-060-01	s	IC TC7WZ32FK(TE85R)
IC605	8-759-656-54	s	IC TC7WH14FK(TE85R)
IC608	6-700-831-01	s	IC TC7WZ74FK(TE85R)
IC610	8-759-584-32	s	IC MB86189PFV-G-BND-ER-E1
IC611	6-704-099-01	s	IC TC7WZ08FK(TE85R)
IC614	8-759-694-36	s	IC SN74CBTLV3257PWR
IC615	8-759-679-55	s	IC SN74LVC08APWR
IC618	8-759-679-55	s	IC SN74LVC08APWR
IC619	6-704-099-01	s	IC TC7WZ08FK(TE85R)
L100	1-419-630-21	s	COIL, CHOKE 4.7UH
L101	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L200	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L201	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L202	1-416-344-21	s	COIL, CHOKE 10UH
L500	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L602	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L603	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
PH500	8-749-014-35	s	IC HCPL-0630-500
Q500	6-551-265-01	s	TRANSISTOR SI2307BDS-T1
Q501	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q502	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q503	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q504	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q505	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q600	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q601	6-550-631-01	s	TRANSISTOR 2SA1797-T100-Q
R100	1-208-863-81	s	RES, CHIP 100 (1005)
R101	1-208-943-81	s	RES, CHIP 220K (1005)
R103	1-208-863-81	s	RES, CHIP 100 (1005)
R104	1-208-863-81	s	RES, CHIP 100 (1005)
R105	1-208-935-81	s	RES, CHIP 100K (1005)
R106	1-208-935-81	s	RES, CHIP 100K (1005)
R200	1-208-927-81	s	RES, CHIP 47K (1005)
R201	1-208-935-81	s	RES, CHIP 100K (1005)
R203	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R205	1-208-911-81	s	RES, CHIP 10K (1005)
R206	1-208-927-81	s	RES, CHIP 47K (1005)

(AT-177 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R207	1-208-915-81	s	RES, CHIP 15K (1005)
R208	1-208-887-81	s	RES, CHIP 1.0K (1005)
R209	1-208-927-81	s	RES, CHIP 47K (1005)
R210	1-208-911-81	s	RES, CHIP 10K (1005)
R211	1-208-915-81	s	RES, CHIP 15K (1005)
R212	1-208-935-81	s	RES, CHIP 100K (1005)
R213	1-208-935-81	s	RES, CHIP 100K (1005)
R214	1-208-927-81	s	RES, CHIP 47K (1005)
R215	1-208-919-81	s	RES, CHIP 22K (1005)
R216	1-208-935-81	s	RES, CHIP 100K (1005)
R217	1-208-935-81	s	RES, CHIP 100K (1005)
R218	1-208-935-81	s	RES, CHIP 100K (1005)
R219	1-208-903-81	s	RES, CHIP 4.7K (1005)
R220	1-208-903-81	s	RES, CHIP 4.7K (1005)
R221	1-208-935-81	s	RES, CHIP 100K (1005)
R222	1-208-927-81	s	RES, CHIP 47K (1005)
R223	1-208-927-81	s	RES, CHIP 47K (1005)
R228	1-208-935-81	s	RES, CHIP 100K (1005)
R229	1-208-935-81	s	RES, CHIP 100K (1005)
R230	1-208-935-81	s	RES, CHIP 100K (1005)
R231	1-208-927-81	s	RES, CHIP 47K (1005)
R233	1-208-919-81	s	RES, CHIP 22K (1005)
R234	1-208-903-81	s	RES, CHIP 4.7K (1005)
R235	1-208-903-81	s	RES, CHIP 4.7K (1005)
R236	1-208-903-81	s	RES, CHIP 4.7K (1005)
R237	1-208-887-81	s	RES, CHIP 1.0K (1005)
R238	1-220-870-81	s	RES, CHIP 10 (1005)
R240	1-208-927-81	s	RES, CHIP 47K (1005)
R241	1-208-927-81	s	RES, CHIP 47K (1005)
R242	1-208-919-81	s	RES, CHIP 22K (1005)
R243	1-208-919-81	s	RES, CHIP 22K (1005)
R244	1-220-870-81	s	RES, CHIP 10 (1005)
R245	1-220-870-81	s	RES, CHIP 10 (1005)
R246	1-208-887-81	s	RES, CHIP 1.0K (1005)
R247	1-208-887-81	s	RES, CHIP 1.0K (1005)
R248	1-208-887-81	s	RES, CHIP 1.0K (1005)
R249	1-208-887-81	s	RES, CHIP 1.0K (1005)
R251	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R254	1-208-863-81	s	RES, CHIP 100 (1005)
R255	1-208-947-81	s	RES, CHIP 330K (1005)
R256	1-208-943-81	s	RES, CHIP 220K (1005)
R257	1-208-863-81	s	RES, CHIP 100 (1005)
R258	1-208-863-81	s	RES, CHIP 100 (1005)
R259	1-208-887-81	s	RES, CHIP 1.0K (1005)
R261	1-208-903-81	s	RES, CHIP 4.7K (1005)
R263	1-208-903-81	s	RES, CHIP 4.7K (1005)
R265	1-208-903-81	s	RES, CHIP 4.7K (1005)
R266	1-208-911-81	s	RES, CHIP 10K (1005)
R267	1-208-903-81	s	RES, CHIP 4.7K (1005)
R268	1-208-903-81	s	RES, CHIP 4.7K (1005)
R269	1-208-903-81	s	RES, CHIP 4.7K (1005)
R270	1-208-863-81	s	RES, CHIP 100 (1005)
R271	1-208-863-81	s	RES, CHIP 100 (1005)
R272	1-208-879-81	s	RES, CHIP 470 (1005)
R273	1-208-863-81	s	RES, CHIP 100 (1005)
R274	1-208-895-81	s	RES, CHIP 2.2K (1005)
R275	1-208-943-81	s	RES, CHIP 220K (1005)
R276	1-208-943-81	s	RES, CHIP 220K (1005)
R277	1-208-919-81	s	RES, CHIP 22K (1005)

(AT-177 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R278	1-208-863-81	s	RES, CHIP 100 (1005)
R279	1-208-863-81	s	RES, CHIP 100 (1005)
R280	1-208-935-81	s	RES, CHIP 100K (1005)
R282	1-220-870-81	s	RES, CHIP 10 (1005)
R283	1-208-887-81	s	RES, CHIP 1.0K (1005)
R284	1-208-943-81	s	RES, CHIP 220K (1005)
R286	1-220-870-81	s	RES, CHIP 10 (1005)
R287	1-220-870-81	s	RES, CHIP 10 (1005)
R288	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R289	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R290	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R291	1-208-903-81	s	RES, CHIP 4.7K (1005)
R293	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R294	1-208-903-81	s	RES, CHIP 4.7K (1005)
R295	1-208-935-81	s	RES, CHIP 100K (1005)
R297	1-208-903-81	s	RES, CHIP 4.7K (1005)
R298	1-208-863-81	s	RES, CHIP 100 (1005)
R299	1-208-887-81	s	RES, CHIP 1.0K (1005)
R300	1-208-911-81	s	RES, CHIP 10K (1005)
R303	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R309	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R312	1-208-855-81	s	RES, CHIP 47 (1005)
R400	1-208-863-81	s	RES, CHIP 100 (1005)
R401	1-208-863-81	s	RES, CHIP 100 (1005)
R402	1-208-855-81	s	RES, CHIP 47 (1005)
R403	1-208-855-81	s	RES, CHIP 47 (1005)
R404	1-208-855-81	s	RES, CHIP 47 (1005)
R406	1-208-855-81	s	RES, CHIP 47 (1005)
R407	1-208-855-81	s	RES, CHIP 47 (1005)
R408	1-208-943-81	s	RES, CHIP 220K (1005)
R410	1-208-855-81	s	RES, CHIP 47 (1005)
R414	1-208-863-81	s	RES, CHIP 100 (1005)
R415	1-208-855-81	s	RES, CHIP 47 (1005)
R416	1-208-855-81	s	RES, CHIP 47 (1005)
R417	1-208-863-81	s	RES, CHIP 100 (1005)
R418	1-208-943-81	s	RES, CHIP 220K (1005)
R419	1-208-943-81	s	RES, CHIP 220K (1005)
R420	1-208-855-81	s	RES, CHIP 47 (1005)
R421	1-208-943-81	s	RES, CHIP 220K (1005)
R425	1-208-855-81	s	RES, CHIP 47 (1005)
R427	1-220-870-81	s	RES, CHIP 10 (1005)
R500	1-208-863-81	s	RES, CHIP 100 (1005)
R501	1-208-935-81	s	RES, CHIP 100K (1005)
R502	1-208-863-81	s	RES, CHIP 100 (1005)
R503	1-208-863-81	s	RES, CHIP 100 (1005)
R504	1-208-863-81	s	RES, CHIP 100 (1005)
R505	1-208-863-81	s	RES, CHIP 100 (1005)
R506	1-208-943-81	s	RES, CHIP 220K (1005)
R507	1-208-863-81	s	RES, CHIP 100 (1005)
R508	1-208-935-81	s	RES, CHIP 100K (1005)
R509	1-208-927-81	s	RES, CHIP 47K (1005)
R510	1-208-935-81	s	RES, CHIP 100K (1005)
R511	1-208-927-81	s	RES, CHIP 47K (1005)
R512	1-208-863-81	s	RES, CHIP 100 (1005)
R513	1-208-951-81	s	RES, CHIP 470K (1005)
R514	1-208-951-81	s	RES, CHIP 470K (1005)
R515	1-208-935-81	s	RES, CHIP 100K (1005)
R516	1-208-863-81	s	RES, CHIP 100 (1005)
R517	1-208-863-81	s	RES, CHIP 100 (1005)

(AT-177 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R518	1-208-911-81	s	RES, CHIP 10K (1005)
R519	1-208-935-81	s	RES, CHIP 100K (1005)
R520	1-208-935-81	s	RES, CHIP 100K (1005)
R521	1-208-927-81	s	RES, CHIP 47K (1005)
R522	1-208-911-81	s	RES, CHIP 10K (1005)
R523	1-208-927-81	s	RES, CHIP 47K (1005)
R524	1-208-927-81	s	RES, CHIP 47K (1005)
R525	1-208-863-81	s	RES, CHIP 100 (1005)
R526	1-220-870-81	s	RES, CHIP 10 (1005)
R527	1-220-870-81	s	RES, CHIP 10 (1005)
R600	1-208-855-81	s	RES, CHIP 47 (1005)
R609	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R611	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R616	1-208-911-81	s	RES, CHIP 10K (1005)
R617	1-208-911-81	s	RES, CHIP 10K (1005)
R619	1-208-887-81	s	RES, CHIP 1.0K (1005)
R620	1-208-911-81	s	RES, CHIP 10K (1005)
R621	1-208-919-81	s	RES, CHIP 22K (1005)
R622	1-208-891-81	s	RES, CHIP 1.5K (1005)
R623	1-220-878-81	s	RES, CHIP 22 (1005)
R624	1-220-878-81	s	RES, CHIP 22 (1005)
R625	1-220-870-81	s	RES, CHIP 10 (1005)
R626	1-208-855-81	s	RES, CHIP 47 (1005)
R627	1-208-855-81	s	RES, CHIP 47 (1005)
R629	1-208-863-81	s	RES, CHIP 100 (1005)
R646	1-208-943-81	s	RES, CHIP 220K (1005)
R648	1-208-863-81	s	RES, CHIP 100 (1005)
R650	1-208-863-81	s	RES, CHIP 100 (1005)
R651	1-208-863-81	s	RES, CHIP 100 (1005)
R652	1-208-935-81	s	RES, CHIP 100K (1005)
R656	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R657	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R658	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R661	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R662	1-218-990-81	s	CONDUCTOR, CHIP (1005)
RB100	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB101	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB102	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB103	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB104	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB105	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB108	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB109	1-234-382-21	s	RES, NETWORK 220K (1005X4)
RB110	1-234-382-21	s	RES, NETWORK 220K (1005X4)
RB200	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB201	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB202	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB203	1-234-382-21	s	RES, NETWORK 220K (1005X4)
RB204	1-234-377-21	s	RES, NETWORK 4.7K (1005X4)
RB205	1-234-382-21	s	RES, NETWORK 220K (1005X4)
RB206	1-234-382-21	s	RES, NETWORK 220K (1005X4)
RB207	1-234-377-21	s	RES, NETWORK 4.7K (1005X4)
RB208	1-234-377-21	s	RES, NETWORK 4.7K (1005X4)
RB209	1-234-377-21	s	RES, NETWORK 4.7K (1005X4)
RB210	1-234-369-21	s	RES, NETWORK 10 (1005X4)
RB211	1-234-369-21	s	RES, NETWORK 10 (1005X4)
RB212	1-234-369-21	s	RES, NETWORK 10 (1005X4)
RB213	1-234-377-21	s	RES, NETWORK 4.7K (1005X4)
RB214	1-234-377-21	s	RES, NETWORK 4.7K (1005X4)

(AT-177 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB215	1-234-377-21	s	RES, NETWORK 4.7K (1005X4)
RB216	1-234-377-21	s	RES, NETWORK 4.7K (1005X4)
RB217	1-234-377-21	s	RES, NETWORK 4.7K (1005X4)
RB300	1-234-382-21	s	RES, NETWORK 220K (1005X4)
RB301	1-234-382-21	s	RES, NETWORK 220K (1005X4)
RB402	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB403	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB404	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB406	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB407	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB408	1-234-382-21	s	RES, NETWORK 220K (1005X4)
RB409	1-234-382-21	s	RES, NETWORK 220K (1005X4)
RB410	1-234-382-21	s	RES, NETWORK 220K (1005X4)
RB411	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB412	1-234-382-21	s	RES, NETWORK 220K (1005X4)
RB413	1-234-382-21	s	RES, NETWORK 220K (1005X4)
RB414	1-234-382-21	s	RES, NETWORK 220K (1005X4)
RB415	1-234-382-21	s	RES, NETWORK 220K (1005X4)
RB416	1-234-382-21	s	RES, NETWORK 220K (1005X4)
RB417	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB418	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB419	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB420	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB421	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB500	1-234-377-21	s	RES, NETWORK 4.7K (1005X4)
RB602	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB603	1-234-382-21	s	RES, NETWORK 220K (1005X4)
RB607	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB608	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB609	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB610	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB611	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB612	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB613	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB614	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB615	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB616	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB617	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB618	1-234-372-21	s	RES, NETWORK 100 (1005X4)
S400	1-572-922-31	s	SWITCH, SLIDE
S401	1-692-270-41	s	SWITCH, SLIDE
S402	1-692-271-41	s	SWITCH, SLIDE
THP600	1-803-353-21	s	THERMISTOR, POSITIVE
TP200	⚠ 1-535-757-21	s	CHIP, CHECKER
X200	1-814-022-11	s	OSCILLATOR, CRYSTAL (32MHZ)

AXM-38 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1545-896-A	s	MOUNTED CIRCUIT BOARD, AXM-38
C1	1-114-214-81	s	CAP,CHIP CERAMIC470PF CH1005
C2	1-114-214-81	s	CAP,CHIP CERAMIC470PF CH1005
C3	1-114-214-81	s	CAP,CHIP CERAMIC470PF CH1005
C4	1-114-214-81	s	CAP,CHIP CERAMIC470PF CH1005
C5	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C6	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C102	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C103	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C104	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C105	1-114-214-81	s	CAP,CHIP CERAMIC470PF CH1005
C106	1-114-214-81	s	CAP,CHIP CERAMIC470PF CH1005
C107	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C108	1-126-405-21	s	CAP, CHIP ELECT 10MF (6.3X5.7)
C109	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C110	1-126-405-21	s	CAP, CHIP ELECT 10MF (6.3X5.7)
C111	1-126-405-21	s	CAP, CHIP ELECT 10MF (6.3X5.7)
C112	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C113	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C114	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C115	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C116	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C117	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C118	1-114-214-81	s	CAP,CHIP CERAMIC470PF CH1005
C119	1-114-214-81	s	CAP,CHIP CERAMIC470PF CH1005
C120	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C121	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C202	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C203	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C204	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C205	1-114-214-81	s	CAP,CHIP CERAMIC470PF CH1005
C206	1-114-214-81	s	CAP,CHIP CERAMIC470PF CH1005
C207	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C208	1-126-405-21	s	CAP, CHIP ELECT 10MF (6.3X5.7)
C209	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C210	1-126-405-21	s	CAP, CHIP ELECT 10MF (6.3X5.7)
C211	1-126-405-21	s	CAP, CHIP ELECT 10MF (6.3X5.7)
C212	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C213	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C214	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C215	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C216	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C217	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C218	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C219	1-114-214-81	s	CAP,CHIP CERAMIC470PF CH1005
C220	1-114-214-81	s	CAP,CHIP CERAMIC470PF CH1005
CN7	1-817-054-21	s	PIN, CONNECTOR 6P
CN101	1-573-594-23	s	CONNECTOR, XLR TYPE 3P
CN201	1-573-594-23	s	CONNECTOR, XLR TYPE 3P
CN302	1-774-795-11	s	CONNECTOR, XLR (RECEPTACLE) 5P
CN403	1-778-650-31	s	CONNECTOR, FFC/FPC(ZIF) ST 30P
D101	8-719-989-01	s	DIODE DA221-TL
D102	8-719-989-01	s	DIODE DA221-TL
D103	8-719-989-04	s	DIODE DAN222-TL
D201	8-719-989-01	s	DIODE DA221-TL
D202	8-719-989-01	s	DIODE DA221-TL

Ref. No. or Q'ty	Part No.	SP	Description
D203	8-719-989-04	s	DIODE DAN222-TL
D301	8-719-077-09	s	DIODE CL-196HR-CD-T
FB101	1-400-834-21	s	FERRITE, EMI (SMD) (1005)
FB201	1-400-834-21	s	FERRITE, EMI (SMD) (1005)
FB301	1-400-834-21	s	FERRITE, EMI (SMD) (1005)
FB303	1-400-834-21	s	FERRITE, EMI (SMD) (1005)
IC101	6-704-931-01	s	IC MAX3281EAUT+T
IC102	6-706-489-01	s	IC TC7SH32FU(T5RSOYJF)
IC103	8-759-422-21	s	IC NJM4580V(TE2)
IC104	8-759-675-54	s	IC TC7W53FK(TE85R)
IC201	6-704-931-01	s	IC MAX3281EAUT+T
IC202	6-706-489-01	s	IC TC7SH32FU(T5RSOYJF)
IC203	8-759-422-21	s	IC NJM4580V(TE2)
IC204	8-759-675-54	s	IC TC7W53FK(TE85R)
L101	1-428-965-11	s	COIL, CHOKE (SMD)
L102	1-428-965-11	s	COIL, CHOKE (SMD)
L201	1-428-965-11	s	COIL, CHOKE (SMD)
L202	1-428-965-11	s	COIL, CHOKE (SMD)
Q101	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q102	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q103	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q104	8-729-202-14	s	TRANSISTOR 2SC2713G-TE85L
Q105	8-729-012-36	s	TRANSISTOR 2SK711-BL/V-TE85L
Q106	8-729-012-36	s	TRANSISTOR 2SK711-BL/V-TE85L
Q201	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q202	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q203	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q204	8-729-202-14	s	TRANSISTOR 2SC2713G-TE85L
Q205	8-729-012-36	s	TRANSISTOR 2SK711-BL/V-TE85L
Q206	8-729-012-36	s	TRANSISTOR 2SK711-BL/V-TE85L
Q401	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q402	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q408	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q409	8-729-928-82	s	TRANSISTOR DTC144EE-TL
R101	1-208-943-81	s	RES, CHIP 220K (1005)
R102	1-208-943-81	s	RES, CHIP 220K (1005)
R103	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R104	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R107	1-208-915-81	s	RES, CHIP 15K (1005)
R108	1-208-872-81	s	RES, CHIP 240 (1005)
R109	1-208-872-81	s	RES, CHIP 240 (1005)
R110	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R112	1-208-943-81	s	RES, CHIP 220K (1005)
R113	1-208-911-81	s	RES, CHIP 10K (1005)
R114	1-208-911-81	s	RES, CHIP 10K (1005)
R115	1-208-899-81	s	RES, CHIP 3.3K (1005)
R116	1-208-899-81	s	RES, CHIP 3.3K (1005)
R117	1-208-899-81	s	RES, CHIP 3.3K (1005)
R118	1-208-899-81	s	RES, CHIP 3.3K (1005)
R119	1-208-923-81	s	RES, CHIP 33K (1005)
R120	1-208-879-81	s	RES, CHIP 470 (1005)
R121	1-208-879-81	s	RES, CHIP 470 (1005)
R122	1-208-879-81	s	RES, CHIP 470 (1005)
R123	1-218-863-91	s	RES, CHIP 4.7K (1608)
R124	1-218-855-91	s	RES, CHIP 2.2K (1608)
R125	1-218-855-91	s	RES, CHIP 2.2K (1608)
R126	1-218-863-91	s	RES, CHIP 4.7K (1608)

(AXM-38 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R127	1-208-943-81	s	RES, CHIP 220K (1005)
R128	1-208-891-81	s	RES, CHIP 1.5K (1005)
R129	1-208-863-81	s	RES, CHIP 100 (1005)
R130	1-208-895-81	s	RES, CHIP 2.2K (1005)
R131	1-208-891-81	s	RES, CHIP 1.5K (1005)
R132	1-208-887-81	s	RES, CHIP 1.0K (1005)
R133	1-208-899-81	s	RES, CHIP 3.3K (1005)
R134	1-208-911-81	s	RES, CHIP 10K (1005)
R135	1-208-911-81	s	RES, CHIP 10K (1005)
R136	1-208-863-81	s	RES, CHIP 100 (1005)
R137	1-208-863-81	s	RES, CHIP 100 (1005)
R138	1-208-959-81	s	RES, CHIP 1M (1005)
R139	1-208-863-81	s	RES, CHIP 100 (1005)
R140	1-208-863-81	s	RES, CHIP 100 (1005)
R141	1-208-959-81	s	RES, CHIP 1M (1005)
R144	1-208-959-81	s	RES, CHIP 1M (1005)
R146	1-208-883-81	s	RES, CHIP 680 (1005)
R147	1-208-867-81	s	RES, CHIP 150 (1005)
R148	1-208-959-81	s	RES, CHIP 1M (1005)
R150	1-208-895-81	s	RES, CHIP 2.2K (1005)
R151	1-208-883-81	s	RES, CHIP 680 (1005)
R153	1-208-899-81	s	RES, CHIP 3.3K (1005)
R154	1-208-899-81	s	RES, CHIP 3.3K (1005)
R155	1-220-878-81	s	RES, CHIP 22 (1005)
R201	1-208-943-81	s	RES, CHIP 220K (1005)
R202	1-208-943-81	s	RES, CHIP 220K (1005)
R203	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R204	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R207	1-208-915-81	s	RES, CHIP 15K (1005)
R208	1-208-872-81	s	RES, CHIP 240 (1005)
R209	1-208-872-81	s	RES, CHIP 240 (1005)
R210	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R212	1-208-943-81	s	RES, CHIP 220K (1005)
R213	1-208-911-81	s	RES, CHIP 10K (1005)
R214	1-208-911-81	s	RES, CHIP 10K (1005)
R215	1-208-899-81	s	RES, CHIP 3.3K (1005)
R216	1-208-899-81	s	RES, CHIP 3.3K (1005)
R217	1-208-899-81	s	RES, CHIP 3.3K (1005)
R218	1-208-899-81	s	RES, CHIP 3.3K (1005)
R219	1-208-923-81	s	RES, CHIP 33K (1005)
R220	1-208-879-81	s	RES, CHIP 470 (1005)
R221	1-208-879-81	s	RES, CHIP 470 (1005)
R222	1-208-879-81	s	RES, CHIP 470 (1005)
R223	1-218-863-91	s	RES, CHIP 4.7K (1608)
R224	1-218-855-91	s	RES, CHIP 2.2K (1608)
R225	1-218-855-91	s	RES, CHIP 2.2K (1608)
R226	1-218-863-91	s	RES, CHIP 4.7K (1608)
R227	1-208-943-81	s	RES, CHIP 220K (1005)
R228	1-208-891-81	s	RES, CHIP 1.5K (1005)
R229	1-208-863-81	s	RES, CHIP 100 (1005)
R230	1-208-895-81	s	RES, CHIP 2.2K (1005)
R231	1-208-891-81	s	RES, CHIP 1.5K (1005)
R232	1-208-887-81	s	RES, CHIP 1.0K (1005)
R233	1-208-899-81	s	RES, CHIP 3.3K (1005)
R234	1-208-911-81	s	RES, CHIP 10K (1005)
R235	1-208-911-81	s	RES, CHIP 10K (1005)
R236	1-208-863-81	s	RES, CHIP 100 (1005)
R237	1-208-863-81	s	RES, CHIP 100 (1005)
R238	1-208-959-81	s	RES, CHIP 1M (1005)

(AXM-38 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R239	1-208-863-81	s	RES, CHIP 100 (1005)
R240	1-208-863-81	s	RES, CHIP 100 (1005)
R241	1-208-959-81	s	RES, CHIP 1M (1005)
R244	1-208-959-81	s	RES, CHIP 1M (1005)
R246	1-208-883-81	s	RES, CHIP 680 (1005)
R247	1-208-867-81	s	RES, CHIP 150 (1005)
R248	1-208-959-81	s	RES, CHIP 1M (1005)
R250	1-208-895-81	s	RES, CHIP 2.2K (1005)
R251	1-208-883-81	s	RES, CHIP 680 (1005)
R253	1-208-899-81	s	RES, CHIP 3.3K (1005)
R254	1-208-899-81	s	RES, CHIP 3.3K (1005)
R255	1-220-878-81	s	RES, CHIP 22 (1005)
R302	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R306	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R401	1-208-911-81	s	RES, CHIP 10K (1005)
R402	1-208-899-81	s	RES, CHIP 3.3K (1005)
R403	1-208-919-81	s	RES, CHIP 22K (1005)
R404	1-208-911-81	s	RES, CHIP 10K (1005)
R405	1-208-899-81	s	RES, CHIP 3.3K (1005)
R406	1-208-919-81	s	RES, CHIP 22K (1005)
R415	1-208-855-81	s	RES, CHIP 47 (1005)
R416	1-208-855-81	s	RES, CHIP 47 (1005)
S101	1-572-042-11	s	SWITCH, SLIDE
S201	1-572-042-11	s	SWITCH, SLIDE
S203	1-786-333-21	s	SWITCH, SLIDE (SMD)

CI-37 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1540-087-B	s	MOUNTED CIRCUIT BOARD, CI-37
C1	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C11	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C23	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C24	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
CN1	1-764-243-31	o	CONNECTOR (COAXIAL)
CN2	1-764-243-31	o	CONNECTOR (COAXIAL)
CN3	1-794-142-31	s	CONNECTOR, FFC/FPC(ZIF) AN 36P
FB1	1-400-834-21	s	FERRITE, EMI (SMD) (1005)
FB2	1-400-834-21	s	FERRITE, EMI (SMD) (1005)
FB3	1-400-834-21	s	FERRITE, EMI (SMD) (1005)
FB4	1-400-834-21	s	FERRITE, EMI (SMD) (1005)
FB5	1-400-834-21	s	FERRITE, EMI (SMD) (1005)
FB6	1-400-834-21	s	FERRITE, EMI (SMD) (1005)
FB7	1-400-834-21	s	FERRITE, EMI (SMD) (1005)
FB8	1-400-834-21	s	FERRITE, EMI (SMD) (1005)
FB9	1-400-834-21	s	FERRITE, EMI (SMD) (1005)
IC1	8-759-392-77	s	IC SN74LVC245APWR
IC2	8-759-392-77	s	IC SN74LVC245APWR
IC3	8-759-183-53	s	IC TL431CPK-E2
R3	1-208-883-81	s	RES, CHIP 680 (1005)
R18	1-208-887-81	s	RES, CHIP 1.0K (1005)
RB1	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB2	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB4	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB5	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB6	1-234-381-21	s	RES, NETWORK 100K (1005X4)

CN-2946 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1538-881-A	s	MOUNTED CIRCUIT BOARD, CN-2946
C1	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5	1-164-862-81	s	CAP, CHIP CERAMIC 33PF CH 1005
C6	1-164-862-81	s	CAP, CHIP CERAMIC 33PF CH 1005
C7	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C8	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C9	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C10	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C11	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C12	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C13	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C14	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C15	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C16	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
CN1	1-816-562-31	s	CONNECTOR, FFC/FPC(ZIF) ST 36P
CN2	1-815-187-11	s	JACK, MODULAR
D1	8-719-077-09	s	DIODE CL-196HR-CD-T
E1	1-535-757-21	s	CHIP, CHECKER
E2	1-535-757-21	s	CHIP, CHECKER
FB1	1-469-379-21	s	FERRITE, EMI (SMD) (2012)
FB2	1-469-379-21	s	FERRITE, EMI (SMD) (2012)
L1	1-457-057-21	s	COIL, COMMON MODE CHOKE
L2	1-457-057-21	s	COIL, COMMON MODE CHOKE
R2	1-208-895-81	s	RES, CHIP 2.2K (1005)
R12	1-220-878-81	s	RES, CHIP 22 (1005)
R13	1-220-878-81	s	RES, CHIP 22 (1005)
R14	1-220-878-81	s	RES, CHIP 22 (1005)
R15	1-220-878-81	s	RES, CHIP 22 (1005)
R16	1-220-878-81	s	RES, CHIP 22 (1005)
R17	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R21	1-208-903-81	s	RES, CHIP 4.7K (1005)
R22	1-208-869-81	s	RES, CHIP 180 (1005)
R23	1-208-856-81	s	RES, CHIP 51 (1005)
R24	1-208-856-81	s	RES, CHIP 51 (1005)
R25	1-208-856-81	s	RES, CHIP 51 (1005)
R26	1-208-856-81	s	RES, CHIP 51 (1005)
R27	1-208-875-81	s	RES, CHIP 330 (1005)
R28	1-208-875-81	s	RES, CHIP 330 (1005)
R30	1-208-895-81	s	RES, CHIP 2.2K (1005)
R31	1-208-895-81	s	RES, CHIP 2.2K (1005)
R33	1-208-891-81	s	RES, CHIP 1.5K (1005)
RB1	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3	1-234-370-21	s	RES, NETWORK 22 (1005X4)
S1	1-570-608-11	s	SWITCH, TOGGLE
X1	1-813-052-21	s	VIBRATOR, CRYSTAL (25 MHz)

CN-2947 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1539-040-A	s	MOUNTED CIRCUIT BOARD, CN-2947

CN-2948 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1540-123-A	s	MOUNTED CIRCUIT BOARD, CN-2948
2pcs	3-729-076-11	s	SCREW (+B) (2X4)
C1	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
CN1	1-793-304-12	s	SQUARE-BUILT CONNECTOR(1394)
CN2	1-691-591-21	o	PIN, CONNECTOR (1.5MM) (SMD)8P
L1	1-457-324-21	s	COIL, CHOKE
R1	1-218-989-81	s	RES, CHIP 1M

CN-3001 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1540-095-A	s	MOUNTED CIRCUIT BOARD, CN-3001
C1	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C2	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C3	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C4	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C5	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C6	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C7	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C8	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
CN1	1-784-602-11	s	CONNECTOR, XLR (RECEPTACLE) 5P
CN2	1-573-768-21	s	PIN, CONNECTOR (1.5MM) (SMD)5P
FB1	1-400-461-21	s	FERRITE, EMI (SMD) (1005)
L1	1-428-965-11	s	COIL, CHOKE (SMD)
L2	1-428-965-11	s	COIL, CHOKE (SMD)

CN-3005 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1540-118-A	s	MOUNTED CIRCUIT BOARD, CN-3005
C5	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C6	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C7	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C8	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C11	1-115-340-91	s	CAP, CERAMIC 0.22MF B (2012)
C16	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C17	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C18	1-100-672-91	s	CAP, CERAMIC 10MF C (3216)
C19	1-100-672-91	s	CAP, CERAMIC 10MF C (3216)
CN1	1-779-992-21	s	PIN, CONNECTOR (PWB) 8P
CN2	1-691-550-21	s	PIN, CONNECTOR (1.5MM)(SMD) 3P
CN3	1-695-320-21	o	PIN, CONNECTOR (1.5MM)(SMD) 2P
CN4	1-764-250-21	o	PIN, CONNECTOR (PC BOARD) 4P
CN5	1-764-250-21	o	PIN, CONNECTOR (PC BOARD) 4P
CN6	1-770-469-21	s	PIN, CONNECTOR (PC BOARD) 2P
D5	8-719-989-04	s	DIODE DAN222-TL
D6	8-719-083-83	s	DI UDZSUSTE-1715B
FL2	1-234-859-11	s	FILTER, EMI REMOVAL
FL3	1-234-859-11	s	FILTER, EMI REMOVAL
FL4	1-234-859-11	s	FILTER, EMI REMOVAL
FL5	1-234-859-11	s	FILTER, EMI REMOVAL
FL6	1-234-859-11	s	FILTER, EMI REMOVAL
FL7	1-234-859-11	s	FILTER, EMI REMOVAL
FL8	1-234-859-11	s	FILTER, EMI REMOVAL
IC1	6-713-118-01	s	IC PCA9554BS-T
IC2	6-710-018-01	s	IC CAT24C02WI-GT3
IC3	8-759-436-53	s	IC LTC1153CS8-E2
Q20	6-550-697-01	s	TRANSISTOR HAT2164H-EL-E
R1	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2	1-208-887-81	s	RES, CHIP 1.0K (1005)
R5	1-208-855-81	s	RES, CHIP 47 (1005)
R15	1-208-903-81	s	RES, CHIP 4.7K (1005)
R16	1-208-863-81	s	RES, CHIP 100 (1005)
R17	1-208-863-81	s	RES, CHIP 100 (1005)
R18	1-208-863-81	s	RES, CHIP 100 (1005)
R19	1-208-863-81	s	RES, CHIP 100 (1005)
R20	1-208-935-81	s	RES, CHIP 100K (1005)
R21	1-208-935-81	s	RES, CHIP 100K (1005)
R33	1-208-919-81	s	RES, CHIP 22K (1005)
R37	1-219-610-21	s	RES, CHIP (SQUARE TYPE) 0.022

CN-3025 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1540-098-A	s	MOUNTED CIRCUIT BOARD, CN-3025
1pc	1-569-621-11	o	HOUSING, CONNECTOR 12P
C1	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C2	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C4	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C5	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C7	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C8	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C9	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C10	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
CN2	1-562-221-31	s	CONNECTOR (ROUND TYPE)(R-F)12P
FB1	1-414-445-21	s	FERRITE, EMI (SMD) (1608)
FB2	1-414-445-21	s	FERRITE, EMI (SMD) (1608)
FB4	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB5	1-414-445-21	s	FERRITE, EMI (SMD) (1608)
FB7	1-414-445-21	s	FERRITE, EMI (SMD) (1608)
FB8	1-414-445-21	s	FERRITE, EMI (SMD) (1608)
FB9	1-414-445-21	s	FERRITE, EMI (SMD) (1608)
FB10	1-414-445-21	s	FERRITE, EMI (SMD) (1608)
FB11	1-469-108-21	s	FERRITE, EMI (SMD) (1608)
FB12	1-469-108-21	s	FERRITE, EMI (SMD) (1608)
FL1	1-234-859-11	s	FILTER, EMI REMOVAL
FL2	1-234-859-11	s	FILTER, EMI REMOVAL
JC1	1-216-864-91	s	CONDUCTOR, CHIP (1608)

CN-3026 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1540-099-A	s	MOUNTED CIRCUIT BOARD, CN-3026
1pc	1-966-080-11	s	HARNESS, SUB (USB-5)
C1	1-112-015-91	s	CAP, CHIP CERAMIC 47MF B 3225
C2	1-112-015-91	s	CAP, CHIP CERAMIC 47MF B 3225
C3	1-112-015-91	s	CAP, CHIP CERAMIC 47MF B 3225
C4	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C5	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
CN2	1-817-109-11	s	CONNECTOR, USB (A)
D1	6-500-701-01	s	DIODE PGB1010603NR
D2	6-500-701-01	s	DIODE PGB1010603NR
D3	6-500-701-01	s	DIODE PGB1010603NR
FB1	1-469-379-21	s	FERRITE, EMI (SMD) (2012)
L1	1-457-057-21	s	COIL, COMMON MODE CHOKE
R1	1-208-959-81	s	RES, CHIP 1M (1005)

CNB-25 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1538-882-A	s	MOUNTED CIRCUIT BOARD, CNB-25
1pc	2-534-514-02	o	SUPPORT (1)
1pc	7-621-775-08	s	SCREW +B 2.6X3
C1	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C4	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C6	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C7	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C8	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C9	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C10	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C11	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C12	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C13	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C14	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C15	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C16	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C17	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C18	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C19	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C20	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C21	1-126-400-21	s	CAP, CHIP ELECT 22MF(6.3X5.7)
C22	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C23	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C24	1-165-629-91	s	CAP, CERAMIC 1000000PF B(3225)
C25	1-165-629-91	s	CAP, CERAMIC 1000000PF B(3225)
C26	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C27	1-112-320-51	s	CAP, ELECT 220MF
C28	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C29	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C30	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C31	1-112-320-51	s	CAP, ELECT 220MF
C32	1-114-236-21	s	CAP, CERAMIC 22MF B (3225)
C33	1-114-236-21	s	CAP, CERAMIC 22MF B (3225)
C34	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C35	1-112-319-11	s	CAP, ELECT 4700MF
C36	1-114-236-21	s	CAP, CERAMIC 22MF B (3225)
C37	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C38	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C39	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C40	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C41	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C42	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C43	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C44	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C45	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C46	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C90	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C200	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C201	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C202	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C203	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C204	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C205	1-104-652-91	s	CAP, ELECT 470MF
C206	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C207	1-104-652-91	s	CAP, ELECT 470MF

(CNB-25 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C208	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C209	1-104-652-91	s	CAP, ELECT 470MF
C210	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C211	1-104-652-91	s	CAP, ELECT 470MF
C212	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C213	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C220	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C221	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C222	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C223	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C224	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C226	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C227	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C228	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C229	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C230	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C231	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C232	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C233	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C234	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C235	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C236	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C237	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C238	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C239	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C300	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C301	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C302	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C303	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C304	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C305	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C306	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C307	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C308	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C309	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C310	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C317	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
CN2	1-770-470-21	o	PIN, CONNECTOR (PC BOARD) 6P
CN3	1-816-296-21	s	PIN, CONNECTOR (PC BOARD) 9P
CN4	1-770-469-21	s	PIN, CONNECTOR (PC BOARD) 2P
CN5	1-785-728-21	s	PIN (PC BOARD), CONNECTOR 7P
CN6	1-779-804-21	s	CONNECTOR, BOARD TO BOARD 30P
CN7	1-778-650-31	s	CONNECTOR, FFC/FPC(ZIF) ST 30P
CN8	1-784-254-21	s	CONNECTOR 10P
D1	8-719-991-01	s	DIODE DAP222-TL
D2	8-719-072-43	s	DIODE RB050L-40TE25
D3	8-719-072-43	s	DIODE RB050L-40TE25
D4	8-719-991-01	s	DIODE DAP222-TL
D5	8-719-991-01	s	DIODE DAP222-TL
D6	8-719-077-09	s	DIODE CL-196HR-CD-T
D7	8-719-077-09	s	DIODE CL-196HR-CD-T
D8	8-719-077-09	s	DIODE CL-196HR-CD-T
D9	6-501-124-01	s	DIODE RSX101VA-30TR
D10	8-719-989-04	s	DIODE DAN222-TL
D11	8-719-989-04	s	DIODE DAN222-TL
D12	8-719-991-01	s	DIODE DAP222-TL
D13	8-719-991-01	s	DIODE DAP222-TL
D14	8-719-989-04	s	DIODE DAN222-TL

(CNB-25 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
D15	6-501-124-01	s	DIODE RSX101VA-30TR
D16	8-719-989-04	s	DIODE DAN222-TL
D200	8-719-989-01	s	DIODE DA221-TL
D201	8-719-989-01	s	DIODE DA221-TL
D202	8-719-989-01	s	DIODE DA221-TL
D203	8-719-989-01	s	DIODE DA221-TL
D300	8-719-083-59	s	DI UDZSUSTE-174.3B
D301	8-719-083-59	s	DI UDZSUSTE-174.3B
D302	8-719-083-59	s	DI UDZSUSTE-174.3B
D303	8-719-991-01	s	DIODE DAP222-TL
FB1	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB2	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB3	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB4	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB5	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB6	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB8	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
IC1	6-808-309-01	s	IC EPM3032ATC44-CNB25-V10
IC2	6-702-879-01	s	IC R3112N281A-TR-FA
IC3	6-706-488-01	s	IC TC7SH14FU(T5RSOYJF)
IC4	6-710-067-01	s	IC LT1933ES6#TR
IC5	8-759-588-01	s	IC LTC1473CGN-E2
IC6	6-709-322-01	s	IC TC7WH123FK(TE85R)
IC18	8-759-273-87	s	IC NJM2901V(TE2)
IC200	8-759-194-97	s	IC NJM4560M-D(TE2)
IC201	8-759-194-97	s	IC NJM4560M-D(TE2)
IC202	6-702-481-01	s	IC PCA9555DB-118
IC301	8-759-185-42	s	IC LM4040AIM3-2.5
IC304	8-759-327-01	s	IC NJM062V(TE2)
IC305	8-759-327-01	s	IC NJM062V(TE2)
L1	1-414-406-41	s	INDUCTOR (SMD) 220.0UH
L2	1-414-854-41	s	INDUCTOR (SMD) 1000.0UH
L3	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4	1-416-919-21	s	COIL, CHOKE 150UH
L5	1-469-549-21	s	INDUCTOR, CHIP 1.0UH (LB2016)
L10	1-469-549-21	s	INDUCTOR, CHIP 1.0UH (LB2016)
L200	1-469-549-21	s	INDUCTOR, CHIP 1.0UH (LB2016)
L201	1-469-549-21	s	INDUCTOR, CHIP 1.0UH (LB2016)
Q1	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q2	6-551-266-01	s	TRANSISTOR SI2304BDS-T1
Q3	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q4	6-550-697-01	s	TRANSISTOR HAT2164H-EL-E
Q5	6-550-697-01	s	TRANSISTOR HAT2164H-EL-E
Q6	6-550-697-01	s	TRANSISTOR HAT2164H-EL-E
Q7	6-550-697-01	s	TRANSISTOR HAT2164H-EL-E
Q8	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q9	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q10	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q11	6-550-697-01	s	TRANSISTOR HAT2164H-EL-E
Q12	6-550-697-01	s	TRANSISTOR HAT2164H-EL-E
Q13	6-551-265-01	s	TRANSISTOR SI2307BDS-T1
Q14	6-551-266-01	s	TRANSISTOR SI2304BDS-T1
Q15	6-550-697-01	s	TRANSISTOR HAT2164H-EL-E
Q16	6-550-697-01	s	TRANSISTOR HAT2164H-EL-E
Q17	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q200	8-729-013-37	s	TRANSISTOR 2SC4213-AB-TE85L
Q201	8-729-013-37	s	TRANSISTOR 2SC4213-AB-TE85L
Q202	8-729-013-37	s	TRANSISTOR 2SC4213-AB-TE85L

(CNB-25 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
Q203	8-729-013-37	s	TRANSISTOR 2SC4213-AB-TE85L
Q211	6-550-631-01	s	TRANSISTOR 2SA1797-T100-Q
Q212	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q214	6-550-632-01	s	TRANSISTOR 2SC4672-T100-Q
Q215	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q216	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q217	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q218	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q219	8-729-054-99	s	TRANSISTOR SI4559EY-T1
Q220	8-729-054-99	s	TRANSISTOR SI4559EY-T1
Q221	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q222	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q300	8-729-054-35	s	TRANSISTOR HAT2070R-EL
Q301	8-729-053-97	s	TRANSISTOR 2SB1449R/S-DL
Q302	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
R1	1-208-935-81	s	RES, CHIP 100K (1005)
R2	1-208-935-81	s	RES, CHIP 100K (1005)
R3	1-208-935-81	s	RES, CHIP 100K (1005)
R4	1-208-935-81	s	RES, CHIP 100K (1005)
R5	1-208-935-81	s	RES, CHIP 100K (1005)
R6	1-208-915-81	s	RES, CHIP 15K (1005)
R7	1-208-911-81	s	RES, CHIP 10K (1005)
R8	1-208-919-81	s	RES, CHIP 22K (1005)
R9	1-208-935-81	s	RES, CHIP 100K (1005)
R10	1-208-917-81	s	RES, CHIP 18K (1005)
R11	1-208-919-81	s	RES, CHIP 22K (1005)
R12	1-208-919-81	s	RES, CHIP 22K (1005)
R13	1-208-911-81	s	RES, CHIP 10K (1005)
R14	1-208-887-81	s	RES, CHIP 1.0K (1005)
R15	1-208-887-81	s	RES, CHIP 1.0K (1005)
R16	1-208-935-81	s	RES, CHIP 100K (1005)
R17	1-208-887-81	s	RES, CHIP 1.0K (1005)
R18	1-208-863-81	s	RES, CHIP 100 (1005)
R19	1-208-923-81	s	RES, CHIP 33K (1005)
R20	1-208-919-81	s	RES, CHIP 22K (1005)
R21	1-208-935-81	s	RES, CHIP 100K (1005)
R22	1-208-903-81	s	RES, CHIP 4.7K (1005)
R23	1-208-919-81	s	RES, CHIP 22K (1005)
R24	1-208-887-81	s	RES, CHIP 1.0K (1005)
R25	1-208-917-81	s	RES, CHIP 18K (1005)
R26	1-208-891-81	s	RES, CHIP 1.5K (1005)
R27	1-208-891-81	s	RES, CHIP 1.5K (1005)
R28	1-208-911-81	s	RES, CHIP 10K (1005)
R29	1-208-911-81	s	RES, CHIP 10K (1005)
R30	1-208-887-81	s	RES, CHIP 1.0K (1005)
R31	1-208-887-81	s	RES, CHIP 1.0K (1005)
R32	1-208-891-81	s	RES, CHIP 1.5K (1005)
R33	1-208-863-81	s	RES, CHIP 100 (1005)
R34	1-208-863-81	s	RES, CHIP 100 (1005)
R35	1-208-887-81	s	RES, CHIP 1.0K (1005)
R36	1-208-927-81	s	RES, CHIP 47K (1005)
R37	1-208-863-81	s	RES, CHIP 100 (1005)
R38	1-208-863-81	s	RES, CHIP 100 (1005)
R39	1-208-887-81	s	RES, CHIP 1.0K (1005)
R40	1-208-887-81	s	RES, CHIP 1.0K (1005)
R41	1-208-863-81	s	RES, CHIP 100 (1005)
R42	1-208-863-81	s	RES, CHIP 100 (1005)
R43	1-208-887-81	s	RES, CHIP 1.0K (1005)
R44	1-208-887-81	s	RES, CHIP 1.0K (1005)

(CNB-25 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R45	1-208-919-81	s	RES, CHIP 22K (1005)
R46	1-208-919-81	s	RES, CHIP 22K (1005)
R47	1-208-907-81	s	RES, CHIP 6.8K (1005)
R48	1-208-887-81	s	RES, CHIP 1.0K (1005)
R49	1-208-915-81	s	RES, CHIP 15K (1005)
R50	1-208-891-81	s	RES, CHIP 1.5K (1005)
R51	1-208-907-81	s	RES, CHIP 6.8K (1005)
R52	1-208-911-81	s	RES, CHIP 10K (1005)
R53	1-208-935-81	s	RES, CHIP 100K (1005)
R54	1-208-911-81	s	RES, CHIP 10K (1005)
R55	1-208-919-81	s	RES, CHIP 22K (1005)
R56	1-208-911-81	s	RES, CHIP 10K (1005)
R57	1-208-919-81	s	RES, CHIP 22K (1005)
R58	1-208-887-81	s	RES, CHIP 1.0K (1005)
R59	1-208-887-81	s	RES, CHIP 1.0K (1005)
R60	1-208-887-81	s	RES, CHIP 1.0K (1005)
R61	1-208-903-81	s	RES, CHIP 4.7K (1005)
R62	1-208-935-81	s	RES, CHIP 100K (1005)
R63	1-208-887-81	s	RES, CHIP 1.0K (1005)
R64	1-208-879-81	s	RES, CHIP 470 (1005)
R65	1-208-903-81	s	RES, CHIP 4.7K (1005)
R66	1-208-915-81	s	RES, CHIP 15K (1005)
R67	1-208-915-81	s	RES, CHIP 15K (1005)
R68	1-208-911-81	s	RES, CHIP 10K (1005)
R69	1-208-911-81	s	RES, CHIP 10K (1005)
R70	1-219-611-21	s	RES, CHIP (SQUARE TYPE) 0.047
R71	1-219-611-21	s	RES, CHIP (SQUARE TYPE) 0.047
R72	1-219-611-21	s	RES, CHIP (SQUARE TYPE) 0.047
R74	1-208-863-81	s	RES, CHIP 100 (1005)
R75	1-208-935-81	s	RES, CHIP 100K (1005)
R76	1-208-935-81	s	RES, CHIP 100K (1005)
R77	1-208-935-81	s	RES, CHIP 100K (1005)
R78	1-208-863-81	s	RES, CHIP 100 (1005)
R79	1-208-959-81	s	RES, CHIP 1M (1005)
R80	1-208-951-81	s	RES, CHIP 470K (1005)
R81	1-208-887-81	s	RES, CHIP 1.0K (1005)
R82	1-208-887-81	s	RES, CHIP 1.0K (1005)
R83	1-208-931-81	s	RES, CHIP 68K (1005)
R84	1-208-931-81	s	RES, CHIP 68K (1005)
R85	1-208-947-81	s	RES, CHIP 330K (1005)
R86	1-208-887-81	s	RES, CHIP 1.0K (1005)
R87	1-208-927-81	s	RES, CHIP 47K (1005)
R88	1-208-887-81	s	RES, CHIP 1.0K (1005)
R89	1-208-911-81	s	RES, CHIP 10K (1005)
R202	1-208-903-81	s	RES, CHIP 4.7K (1005)
R203	1-208-915-81	s	RES, CHIP 15K (1005)
R204	1-208-903-81	s	RES, CHIP 4.7K (1005)
R205	1-208-903-81	s	RES, CHIP 4.7K (1005)
R206	1-208-923-81	s	RES, CHIP 33K (1005)
R207	1-208-907-81	s	RES, CHIP 6.8K (1005)
R208	1-208-907-81	s	RES, CHIP 6.8K (1005)
R209	1-208-903-81	s	RES, CHIP 4.7K (1005)
R210	1-208-903-81	s	RES, CHIP 4.7K (1005)
R211	1-208-903-81	s	RES, CHIP 4.7K (1005)
R212	1-208-923-81	s	RES, CHIP 33K (1005)
R213	1-208-903-81	s	RES, CHIP 4.7K (1005)
R214	1-208-903-81	s	RES, CHIP 4.7K (1005)
R215	1-208-923-81	s	RES, CHIP 33K (1005)
R216	1-208-903-81	s	RES, CHIP 4.7K (1005)

(CNB-25 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R217	1-208-903-81	s	RES, CHIP 4.7K (1005)
R218	1-208-903-81	s	RES, CHIP 4.7K (1005)
R219	1-208-903-81	s	RES, CHIP 4.7K (1005)
R220	1-208-887-81	s	RES, CHIP 1.0K (1005)
R221	1-208-887-81	s	RES, CHIP 1.0K (1005)
R222	1-208-919-81	s	RES, CHIP 22K (1005)
R223	1-208-887-81	s	RES, CHIP 1.0K (1005)
R224	1-208-887-81	s	RES, CHIP 1.0K (1005)
R225	1-208-923-81	s	RES, CHIP 33K (1005)
R226	1-208-855-81	s	RES, CHIP 47 (1005)
R227	1-208-915-81	s	RES, CHIP 15K (1005)
R228	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R229	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R230	1-208-919-81	s	RES, CHIP 22K (1005)
R231	1-208-919-81	s	RES, CHIP 22K (1005)
R232	1-208-855-81	s	RES, CHIP 47 (1005)
R233	1-208-915-81	s	RES, CHIP 15K (1005)
R234	1-208-907-81	s	RES, CHIP 6.8K (1005)
R235	1-208-907-81	s	RES, CHIP 6.8K (1005)
R236	1-208-915-81	s	RES, CHIP 15K (1005)
R237	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R238	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R239	1-208-855-81	s	RES, CHIP 47 (1005)
R240	1-208-919-81	s	RES, CHIP 22K (1005)
R241	1-208-919-81	s	RES, CHIP 22K (1005)
R242	1-208-855-81	s	RES, CHIP 47 (1005)
R243	1-208-935-81	s	RES, CHIP 100K (1005)
R244	1-208-887-81	s	RES, CHIP 1.0K (1005)
R245	1-208-887-81	s	RES, CHIP 1.0K (1005)
R246	1-208-935-81	s	RES, CHIP 100K (1005)
R247	1-208-887-81	s	RES, CHIP 1.0K (1005)
R248	1-208-887-81	s	RES, CHIP 1.0K (1005)
R249	1-208-935-81	s	RES, CHIP 100K (1005)
R251	1-208-863-81	s	RES, CHIP 100 (1005)
R252	1-208-863-81	s	RES, CHIP 100 (1005)
R253	1-208-887-81	s	RES, CHIP 1.0K (1005)
R254	1-208-887-81	s	RES, CHIP 1.0K (1005)
R255	1-208-887-81	s	RES, CHIP 1.0K (1005)
R256	1-208-887-81	s	RES, CHIP 1.0K (1005)
R257	1-208-887-81	s	RES, CHIP 1.0K (1005)
R258	1-208-887-81	s	RES, CHIP 1.0K (1005)
R259	1-208-887-81	s	RES, CHIP 1.0K (1005)
R260	1-208-911-81	s	RES, CHIP 10K (1005)
R264	1-208-903-81	s	RES, CHIP 4.7K (1005)
R267	1-208-919-81	s	RES, CHIP 22K (1005)
R268	1-208-911-81	s	RES, CHIP 10K (1005)
R269	1-208-915-81	s	RES, CHIP 15K (1005)
R270	1-208-903-81	s	RES, CHIP 4.7K (1005)
R271	1-208-927-81	s	RES, CHIP 47K (1005)
R272	1-208-927-81	s	RES, CHIP 47K (1005)
R273	1-208-899-81	s	RES, CHIP 3.3K (1005)
R274	1-208-935-81	s	RES, CHIP 100K (1005)
R275	1-208-935-81	s	RES, CHIP 100K (1005)
R276	1-208-911-81	s	RES, CHIP 10K (1005)
R277	1-208-911-81	s	RES, CHIP 10K (1005)
R278	1-208-935-81	s	RES, CHIP 100K (1005)
R279	1-208-911-81	s	RES, CHIP 10K (1005)
R280	1-208-935-81	s	RES, CHIP 100K (1005)
R281	1-208-911-81	s	RES, CHIP 10K (1005)

(CNB-25 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R300	1-208-925-81	s	RES, CHIP 39K (1005)
R301	1-208-887-81	s	RES, CHIP 1.0K (1005)
R302	1-208-931-81	s	RES, CHIP 68K (1005)
R303	1-219-706-21	s	RES, CHIP (SQUARE TYPE) 0.10
R304	1-208-925-81	s	RES, CHIP 39K (1005)
R305	1-208-931-81	s	RES, CHIP 68K (1005)
R306	1-208-931-81	s	RES, CHIP 68K (1005)
R307	1-208-925-81	s	RES, CHIP 39K (1005)
R308	1-208-855-81	s	RES, CHIP 47 (1005)
R309	1-208-863-81	s	RES, CHIP 100 (1005)
R310	1-208-927-81	s	RES, CHIP 47K (1005)
R311	1-208-917-81	s	RES, CHIP 18K (1005)
R312	1-208-899-81	s	RES, CHIP 3.3K (1005)
R313	1-208-947-81	s	RES, CHIP 330K (1005)
R314	1-208-947-81	s	RES, CHIP 330K (1005)
R315	1-208-879-81	s	RES, CHIP 470 (1005)
R316	1-208-911-81	s	RES, CHIP 10K (1005)
R317	1-208-935-81	s	RES, CHIP 100K (1005)
R318	1-208-935-81	s	RES, CHIP 100K (1005)
THP1	⚠ 1-802-063-21	s	THERMISTOR, POSITIVE
THP2	⚠ 1-802-063-21	s	THERMISTOR, POSITIVE
TP1	1-535-757-21	s	CHIP, CHECKER
TP2	1-535-757-21	s	CHIP, CHECKER

DCP-49A BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1734-504-A	s	MOUNTED CIRCUIT BOARD, DCP-49A
4pcs	3-854-997-01	s	SUPPORT(M2X7)
7pcs	3-855-938-01	s	SCREW
3pcs	3-875-192-01	s	SUPPORT HEATSINK
C1	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C6	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C7	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C9	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C10	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C200	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C201	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C202	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C203	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C204	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C205	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C206	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C207	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C208	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C209	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C210	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C211	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C212	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C213	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C214	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C215	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C216	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C217	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C218	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C219	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C220	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C221	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C222	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C223	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C224	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C225	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C226	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C227	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C228	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C229	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C231	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C232	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C233	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C234	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C235	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C236	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C237	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C240	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C244	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C255	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C256	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C269	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C270	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C271	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C272	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(DCP-49A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C273	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C274	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C275	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C276	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C277	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C278	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C279	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C280	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C281	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C282	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C302	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C303	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C304	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C305	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C306	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C307	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C310	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C311	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C313	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C323	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C324	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C325	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C326	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C327	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C328	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C338	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C339	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C340	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C341	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C342	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C343	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C345	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C346	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C347	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C348	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C349	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C350	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C351	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C352	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C353	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C354	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C355	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C356	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C357	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C358	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C359	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C360	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C361	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C362	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C363	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C364	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C365	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C366	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C367	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C368	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C369	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C370	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C371	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C372	1-165-989-91	s	CAP, CERAMIC 10MF (2012)

(DCP-49A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C373	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C374	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C375	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C376	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C377	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C378	1-114-548-11	s	CAP, NIOBIUM ELECT 22UF
C379	1-114-548-11	s	CAP, NIOBIUM ELECT 22UF
C380	1-114-548-11	s	CAP, NIOBIUM ELECT 22UF
C381	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C382	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C383	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C384	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C385	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C386	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C387	1-114-548-11	s	CAP, NIOBIUM ELECT 22UF
C388	1-114-548-11	s	CAP, NIOBIUM ELECT 22UF
C389	1-114-548-11	s	CAP, NIOBIUM ELECT 22UF
C400	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C401	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C402	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C403	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C404	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C405	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C406	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C407	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C408	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C411	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C412	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C413	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C414	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C416	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C417	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C418	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C419	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C420	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C421	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C422	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C423	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C424	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C425	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C426	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C427	1-112-015-91	s	CAP, CHIP CERAMIC 47MF B 3225
C428	1-112-015-91	s	CAP, CHIP CERAMIC 47MF B 3225
C429	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C430	1-112-015-91	s	CAP, CHIP CERAMIC 47MF B 3225
C431	1-112-015-91	s	CAP, CHIP CERAMIC 47MF B 3225
C432	1-112-015-91	s	CAP, CHIP CERAMIC 47MF B 3225
C433	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C434	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C435	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C436	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C437	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C438	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C439	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C440	1-100-880-91	s	CAP, CERAMIC 100MF C (3225)
C441	1-100-880-91	s	CAP, CERAMIC 100MF C (3225)
C442	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C443	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C444	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(DCP-49A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C445	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C446	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C447	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C448	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C451	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C452	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C455	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C457	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C458	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C459	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C460	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C461	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C462	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C463	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C464	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C465	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C466	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C467	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C468	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C469	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C470	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C471	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C472	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C473	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C474	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C475	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C476	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C477	1-112-015-91	s	CAP, CHIP CERAMIC 47MF B 3225
C478	1-127-956-21	s	CAP, CHIP FILM 0.1MF (3225)
C479	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C480	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C481	1-127-956-21	s	CAP, CHIP FILM 0.1MF (3225)
C482	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C483	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C484	1-127-950-21	s	CAP, CHIP FILM 0.01MF (2012)
C485	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C486	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C487	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C488	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C489	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C491	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C492	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C493	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C494	1-100-880-91	s	CAP, CERAMIC 100MF C (3225)
C500	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C501	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C504	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C506	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C511	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C512	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C513	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C516	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C600	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C601	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C602	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C603	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C604	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C605	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C606	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(DCP-49A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C607	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C608	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C609	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C610	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C611	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C612	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C613	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C614	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C615	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C616	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C617	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C618	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C619	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C620	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C621	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C622	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C623	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C624	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C625	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C626	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C627	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C628	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C629	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C630	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C631	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C632	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C633	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C634	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C635	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C636	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C637	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C638	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C639	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C640	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C641	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C642	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C643	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C644	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C645	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C646	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C647	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C648	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C649	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C650	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C651	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C652	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C653	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C654	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C655	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C656	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C657	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C658	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C659	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C660	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C661	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C662	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C663	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C664	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C665	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(DCP-49A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C666	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C667	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C668	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C669	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C670	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C671	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C672	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C673	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C674	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C675	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C676	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C677	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C678	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C679	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C680	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C681	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C682	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C683	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C684	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C685	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C686	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C687	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C688	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C689	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C690	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C691	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C692	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C693	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C694	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C695	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C696	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C697	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C698	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C699	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C700	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C701	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C702	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C703	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C704	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C705	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C706	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C707	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C708	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C709	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C710	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C711	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C712	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C713	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C714	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C715	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C716	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C717	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C718	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C719	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C720	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C721	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C722	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C723	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C724	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(DCP-49A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C725	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C726	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C727	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C728	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C729	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C730	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C731	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C732	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C733	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C734	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C735	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C736	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C737	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C738	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C739	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C740	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C741	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C742	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C743	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C744	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C745	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C746	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C747	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C748	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C749	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C750	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C751	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C752	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C753	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C754	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C755	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C756	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C757	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C758	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C759	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C760	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C761	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C762	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C763	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C765	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C766	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C800	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C801	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C802	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C803	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C804	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C805	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C806	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C807	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C808	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C809	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C810	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C811	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C812	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C813	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C814	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C815	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C816	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C817	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(DCP-49A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C818	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C819	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C820	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C821	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C822	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C823	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C824	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C825	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C826	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C827	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C828	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C829	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C830	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C831	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C832	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C833	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C834	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C835	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C836	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C837	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C838	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C839	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C840	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C841	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C842	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C843	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C844	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C845	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C846	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C847	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C848	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C849	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C850	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C851	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C852	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C853	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C854	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C855	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C856	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C857	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C858	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C859	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C860	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C861	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C862	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C863	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C864	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C865	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C866	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C867	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C868	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C869	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C870	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C871	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C872	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C873	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C874	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C875	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C876	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(DCP-49A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C877	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C878	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C879	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C880	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C881	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C882	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C883	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C884	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C885	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C886	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C887	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C888	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C889	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C890	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C891	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C892	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C893	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C894	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C895	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C896	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C897	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C898	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C899	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C903	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C904	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C905	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C906	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C907	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C908	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C912	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C913	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C915	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C916	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C917	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C918	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C919	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C920	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C921	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C922	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C923	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C924	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C925	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C926	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C927	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C928	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C929	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C930	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C931	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C932	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C933	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C934	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C935	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C936	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1001	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1002	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1003	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1102	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1103	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1104	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(DCP-49A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1105	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1106	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1107	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1108	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1109	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1110	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1111	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1112	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1113	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1114	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1116	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1117	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1118	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1119	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1120	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1121	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1122	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1123	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1129	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1134	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C1135	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C1136	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1137	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1138	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1140	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C1141	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C1142	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C1143	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C1144	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C1145	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C1146	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C1147	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C1148	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1153	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1154	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1155	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1156	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1157	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1158	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1159	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1160	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1161	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1162	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1165	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C1166	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C1167	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C1168	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C1169	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C1172	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1173	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1174	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1177	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1178	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1180	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1181	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C1183	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C1184	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1185	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1186	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(DCP-49A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1187	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C1188	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C1189	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1190	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1191	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1192	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1300	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C1302	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1303	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1304	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1305	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1306	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1307	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1308	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1309	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1310	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1311	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1312	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1313	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1314	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C1315	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C1316	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C1317	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C1318	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1319	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1320	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1321	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1322	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1323	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1324	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1325	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C1326	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C1327	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1328	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1329	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1330	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1331	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1332	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1333	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1334	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1335	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1336	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1337	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1338	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C1339	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C1340	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C1341	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C1342	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1343	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1344	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1345	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1346	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1347	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1348	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1349	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C1350	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1351	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1352	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C1353	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(DCP-49A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1355	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1356	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1357	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1358	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1359	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1360	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1361	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1362	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1363	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1364	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1365	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1366	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1367	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1368	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1369	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1370	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1371	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1372	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1373	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1374	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1375	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1376	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1377	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1378	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1379	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1380	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1381	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1382	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1383	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1384	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1385	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1386	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1387	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1388	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C1389	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1390	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C1391	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1392	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1393	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1395	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1396	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1398	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C1399	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C1400	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C1401	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1402	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C1403	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1404	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1405	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1406	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C1407	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C1500	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C1501	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1502	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C1503	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1504	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C1505	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C1506	1-164-862-81	s	CAP, CHIP CERAMIC 33PF CH 1005
C1507	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(DCP-49A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1508	1-164-860-81	s	CAP, CHIP CERAMIC 27PF CH 1005
C1509	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1510	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1511	1-164-862-81	s	CAP, CHIP CERAMIC 33PF CH 1005
C1512	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1513	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1515	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1516	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1517	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1518	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1519	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1520	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1522	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1523	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1524	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C1525	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1526	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1527	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1528	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C1529	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1530	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1531	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1532	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1533	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1534	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1535	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1536	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1538	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1539	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1540	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1541	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1542	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1543	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1544	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1545	1-164-860-81	s	CAP, CHIP CERAMIC 27PF CH 1005
C1546	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C1548	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1549	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1550	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1551	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C1552	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1553	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1554	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1555	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1556	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1557	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1558	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1559	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1560	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1561	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1562	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C1563	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1564	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1565	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1566	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1567	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1569	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1570	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1571	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(DCP-49A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1572	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1573	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1574	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1576	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1577	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1578	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1579	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1580	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C1581	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1582	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1583	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1584	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1585	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1586	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1587	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1588	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1589	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1590	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C1591	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1592	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1593	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1594	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1595	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1596	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1597	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1599	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1600	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1601	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1602	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1603	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1604	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C1605	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C1606	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C1608	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1609	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C1612	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1613	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1614	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1615	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1616	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1617	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1618	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1619	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1620	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1622	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1623	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1624	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1625	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1626	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C1627	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1628	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1629	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1630	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C1631	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C1632	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C1633	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1634	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1635	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1636	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(DCP-49A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1637	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1638	1-164-862-81	s	CAP, CHIP CERAMIC 33PF CH 1005
C1639	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C1640	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C1641	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C1642	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1643	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1644	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
CN2	1-818-579-91	s	CONNECTOR, BOARD TO BOARD(60P)
CN3	1-691-591-21	o	PIN, CONNECTOR (1.5MM) (SMD)8P
CN10	1-764-243-31	o	CONNECTOR (COAXIAL)
CN11	1-764-243-31	o	CONNECTOR (COAXIAL)
CN12	1-764-243-31	o	CONNECTOR (COAXIAL)
CN13	1-764-243-31	o	CONNECTOR (COAXIAL)
CN14	1-764-243-31	o	CONNECTOR (COAXIAL)
CN15	1-764-243-31	o	CONNECTOR (COAXIAL)
CN100	1-784-254-21	s	CONNECTOR 10P
D1	8-719-069-28	s	DIODE 1SS400TE-61
D200	8-719-989-04	s	DIODE DAN222-TL
D400	8-719-083-60	s	DI UDZSUSTE-174.7B
D401	8-719-083-60	s	DI UDZSUSTE-174.7B
D402	8-719-083-60	s	DI UDZSUSTE-174.7B
D403	8-719-083-60	s	DI UDZSUSTE-174.7B
D404	8-719-989-01	s	DIODE DA221-TL
D405	8-719-989-01	s	DIODE DA221-TL
D500	8-719-991-01	s	DIODE DAP222-TL
D501	8-719-991-01	s	DIODE DAP222-TL
D701	8-719-082-45	s	DIODE RB715W-TL
D702	8-719-082-45	s	DIODE RB715W-TL
D703	8-719-082-45	s	DIODE RB715W-TL
D704	8-719-082-45	s	DIODE RB715W-TL
D1300	8-719-991-01	s	DIODE DAP222-TL
D1301	8-719-991-01	s	DIODE DAP222-TL
D1500	8-719-989-04	s	DIODE DAN222-TL
E201	1-535-877-22	s	CHIP, CHECKER
E400	1-535-877-22	s	CHIP, CHECKER
E1000	1-535-877-22	s	CHIP, CHECKER
E1001	1-535-877-22	s	CHIP, CHECKER
E1002	1-535-877-22	s	CHIP, CHECKER
E1003	1-535-877-22	s	CHIP, CHECKER
FB202	1-469-100-21	s	FERRITE, EMI (SMD) (1608)
FB300	1-469-100-21	s	FERRITE, EMI (SMD) (1608)
FB301	1-469-100-21	s	FERRITE, EMI (SMD) (1608)
FB302	1-469-100-21	s	FERRITE, EMI (SMD) (1608)
FB303	1-469-100-21	s	FERRITE, EMI (SMD) (1608)
FB304	1-469-100-21	s	FERRITE, EMI (SMD) (1608)
FB305	1-469-100-21	s	FERRITE, EMI (SMD) (1608)
FB800	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB801	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB802	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB803	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB804	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB805	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB806	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB807	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB808	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB809	1-414-864-21	s	FERRITE, EMI (SMD) (1608)

(DCP-49A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
FB810	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB811	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB812	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB813	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB814	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1300	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB1301	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB1302	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB1303	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB1304	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB1305	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB1306	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB1307	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB1308	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB1309	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB1310	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB1311	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB1312	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB1313	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB1314	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB1315	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB1316	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB1317	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB1318	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB1319	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB1320	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB1321	1-469-379-21	s	FERRITE, EMI (SMD) (2012)
FB1322	1-469-379-21	s	FERRITE, EMI (SMD) (2012)
FL300	1-813-541-11	s	FILTER, LOW PASS
FL301	1-813-541-11	s	FILTER, LOW PASS
FL302	1-813-541-11	s	FILTER, LOW PASS
FL1500	1-233-742-21	s	FILTER, LOW PASS
IC1	6-706-476-01	s	IC TC7SET04FU(T5RSOJF)
IC2	6-706-484-01	s	IC TC7SH04FU(T5RSOYJF)
IC4	8-759-346-27	s	IC LM45BIM3X
IC6	8-759-327-01	s	IC NJM062V(TE2)
IC8	6-712-526-01	s	IC CAT24C32WI-GT3(E)
IC9	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC10	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC14	6-704-350-01	s	IC SN74LVC1G66DCKR
IC16	6-704-350-01	s	IC SN74LVC1G66DCKR
IC19	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC200	6-711-696-01	s	IC CY62256VNLL-70ZXCT
IC202	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC203	8-759-672-76	s	IC AK9813BF-E2
IC210	6-700-225-01	s	IC TC74VCX157FT(EL)
IC220	8-759-592-42	s	IC TC7SZ00FU(TE85R)
IC222	8-759-669-67	s	IC TL074CPWR-12
IC223	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC224	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC225	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC226	6-707-414-01	s	IC DS90LV011ATMF
IC227	6-707-414-01	s	IC DS90LV011ATMF
IC228	6-711-852-01	s	IC LTC1844ES5-BYP
IC229	8-759-592-48	s	IC TC7SZ32FU(TE85R)
IC230	6-711-852-01	s	IC LTC1844ES5-BYP
IC301	6-707-884-01	s	IC TC74VHCT04AFT(EKJ)
IC303	8-759-561-46	s	IC AD8014ARTZ-REEL7

(DCP-49A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC304	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC305	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC306	8-759-675-54	s	IC TC7W53FK(TE85R)
IC307	8-759-675-54	s	IC TC7W53FK(TE85R)
IC308	8-759-675-54	s	IC TC7W53FK(TE85R)
IC312	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC313	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC314	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC318	6-711-361-01	s	IC LTC2249CUH#TR
IC319	6-711-361-01	s	IC LTC2249CUH#TR
IC320	6-711-361-01	s	IC LTC2249CUH#TR
IC322	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC323	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC324	6-704-350-01	s	IC SN74LVC1G66DCKR
IC325	6-704-350-01	s	IC SN74LVC1G66DCKR
IC326	6-704-350-01	s	IC SN74LVC1G66DCKR
IC331	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC332	8-759-592-44	s	IC TC7SZ04FU(TE85R)
IC333	8-759-592-48	s	IC TC7SZ32FU(TE85R)
IC336	8-759-592-48	s	IC TC7SZ32FU(TE85R)
IC337	8-759-592-48	s	IC TC7SZ32FU(TE85R)
IC338	8-759-592-48	s	IC TC7SZ32FU(TE85R)
IC400	8-759-327-01	s	IC NJM062V(TE2)
IC401	6-704-976-01	s	IC ADR381ARTZ-REEL7
IC402	8-759-327-01	s	IC NJM062V(TE2)
IC403	8-759-327-01	s	IC NJM062V(TE2)
IC404	8-759-485-24	s	IC MC74HC4046ADTR2
IC406	6-706-478-01	s	IC TC7SET08FU(T5RSOJF)
IC407	6-706-478-01	s	IC TC7SET08FU(T5RSOJF)
IC408	8-759-675-54	s	IC TC7W53FK(TE85R)
IC410	8-759-675-47	s	IC SN74LVC04APWR
IC411	6-701-877-01	s	IC SM8707EV-G-E2
IC412	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC413	6-706-136-01	s	IC LTC3412EFE#TR
IC414	6-706-136-01	s	IC LTC3412EFE#TR
IC415	8-759-675-54	s	IC TC7W53FK(TE85R)
IC416	6-711-852-01	s	IC LTC1844ES5-BYP
IC417	8-759-327-01	s	IC NJM062V(TE2)
IC418	8-759-669-66	s	IC TLC272CPWR-12
IC419	6-706-478-01	s	IC TC7SET08FU(T5RSOJF)
IC501	6-706-088-01	s	IC UPD6467GR-560-E2
IC502	6-706-088-01	s	IC UPD6467GR-560-E2
IC503	6-706-088-01	s	IC UPD6467GR-560-E2
IC504	6-706-088-01	s	IC UPD6467GR-560-E2
IC506	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC507	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC508	8-759-592-48	s	IC TC7SZ32FU(TE85R)
IC801	8-759-592-48	s	IC TC7SZ32FU(TE85R)
IC802	6-707-843-01	s	IC TC74LCX125FT(EKJ)
IC803	6-707-843-01	s	IC TC74LCX125FT(EKJ)
IC804	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC1102	8-759-669-43	s	IC SN74LVC157APWR-12
IC1104	6-712-298-01	s	IC GS1524ACKDE3
IC1105	6-705-968-01	s	IC S-89431ACNC-HBV-TFG
IC1109	6-711-946-01	s	IC GS1528BCKAE3
IC1112	6-711-946-01	s	IC GS1528BCKAE3
IC1113	6-711-946-01	s	IC GS1528BCKAE3
IC1116	6-706-220-01	s	IC LTC3411EMS#TR
IC1119	6-714-067-01	s	IC PCA9555DB-T

(DCP-49A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC1120	6-707-891-01	s	IC TC74VHCT245AFT(EKJ)
IC1121	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC1300	6-706-220-01	s	IC LTC3411EMS#TR
IC1301	6-706-220-01	s	IC LTC3411EMS#TR
IC1302	6-706-220-01	s	IC LTC3411EMS#TR
IC1303	6-706-220-01	s	IC LTC3411EMS#TR
IC1304	8-759-337-40	s	IC NJM2904V(TE2)
IC1305	6-708-346-01	s	IC DAC7512N
IC1306	6-707-891-01	s	IC TC74VHCT245AFT(EKJ)
IC1308	8-759-669-43	s	IC SN74LVC157APWR-12
IC1310	6-706-136-01	s	IC LTC3412EFE#TR
IC1311	6-703-848-01	s	IC SN74CB3T3306DCUR
IC1312	6-703-848-01	s	IC SN74CB3T3306DCUR
IC1313	6-706-220-01	s	IC LTC3411EMS#TR
IC1314	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC1315	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC1316	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC1500	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC1501	8-759-669-66	s	IC TLC272CPWR-12
IC1502	8-759-675-54	s	IC TC7W53FK(TE85R)
IC1503	8-759-669-66	s	IC TLC272CPWR-12
IC1504	8-759-327-14	s	IC TL712CPSR
IC1505	8-759-327-14	s	IC TL712CPSR
IC1506	6-704-350-01	s	IC SN74LVC1G66DCKR
IC1508	6-704-350-01	s	IC SN74LVC1G66DCKR
IC1509	6-704-350-01	s	IC SN74LVC1G66DCKR
IC1511	8-759-398-57	s	IC LM1881MX NOPB
IC1512	6-706-484-01	s	IC TC7SH04FU(T5RSOYJF)
IC1513	6-706-471-01	s	IC THS5661AIPWR
IC1514	6-707-865-01	s	IC TC74VHC125FT(EKJ)
IC1515	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC1516	8-759-327-01	s	IC NJM062V(TE2)
IC1517	6-704-350-01	s	IC SN74LVC1G66DCKR
IC1518	6-707-997-01	s	IC ADV7320KSTZ
IC1519	6-704-350-01	s	IC SN74LVC1G66DCKR
IC1520	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC1521	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC1522	8-759-672-76	s	IC AK9813BF-E2
IC1523	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC1524	6-707-997-01	s	IC ADV7320KSTZ
IC1525	6-707-997-01	s	IC ADV7320KSTZ
IC1526	6-704-350-01	s	IC SN74LVC1G66DCKR
IC1527	6-704-350-01	s	IC SN74LVC1G66DCKR
IC1528	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC1529	8-759-675-54	s	IC TC7W53FK(TE85R)
IC1530	8-759-675-54	s	IC TC7W53FK(TE85R)
IC1531	6-704-350-01	s	IC SN74LVC1G66DCKR
IC1532	6-706-484-01	s	IC TC7SH04FU(T5RSOYJF)
IC1533	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC1534	6-704-350-01	s	IC SN74LVC1G66DCKR
L200	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L201	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L202	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L400	1-416-344-21	s	COIL, CHOKE 10UH
L401	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L402	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L403	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L404	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L405	1-414-398-41	s	INDUCTOR (SMD) 10.0UH

(DCP-49A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
L406	1-424-723-21	s	COIL, CHOKE 1.0UH
L407	1-424-723-21	s	COIL, CHOKE 1.0UH
L408	1-416-344-21	s	COIL, CHOKE 10UH
L409	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L410	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L411	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L412	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L413	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L414	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L416	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L417	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L600	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L601	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L602	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L603	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L604	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L605	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L800	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L801	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L802	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L803	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L805	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L806	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L807	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L808	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L1100	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L1103	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L1104	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L1106	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L1107	1-419-630-21	s	COIL, CHOKE 4.7UH
L1300	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L1301	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L1302	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L1303	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L1306	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L1307	1-419-630-21	s	COIL, CHOKE 4.7UH
L1500	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L1501	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L1504	1-412-947-21	s	INDUCTOR 4.7UH (2520)
L1505	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L1506	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L1507	1-412-981-41	s	INDUCTOR, SMALL TYPE 1.5UH
L1508	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L1510	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L1511	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L1512	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L1513	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L1514	1-412-979-41	s	INDUCTOR, SMALL TYPE 1.0UH
L1515	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L1516	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L1517	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L1518	1-412-947-21	s	INDUCTOR 4.7UH (2520)
L1519	1-412-979-41	s	INDUCTOR, SMALL TYPE 1.0UH
L1520	1-412-979-41	s	INDUCTOR, SMALL TYPE 1.0UH
L1521	1-412-955-21	s	INDUCTOR, SMALL TYPE 22UH 2520
Q300	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q301	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q400	6-550-631-01	s	TRANSISTOR 2SA1797-T100-Q
Q401	6-550-632-01	s	TRANSISTOR 2SC4672-T100-Q

(DCP-49A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
Q402	6-550-631-01	s	TRANSISTOR 2SA1797-T100-Q
Q404	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q405	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q406	6-550-631-01	s	TRANSISTOR 2SA1797-T100-Q
Q408	6-550-631-01	s	TRANSISTOR 2SA1797-T100-Q
Q409	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q410	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q414	6-550-631-01	s	TRANSISTOR 2SA1797-T100-Q
Q501	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q505	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q506	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q1105	6-551-659-01	s	TRANSISTOR SI3443BDV-T1-E3
Q1106	6-551-659-01	s	TRANSISTOR SI3443BDV-T1-E3
Q1107	6-551-659-01	s	TRANSISTOR SI3443BDV-T1-E3
Q1108	6-551-659-01	s	TRANSISTOR SI3443BDV-T1-E3
Q1300	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q1301	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q1500	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q1501	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q1503	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q1504	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q1505	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q1506	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q1507	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q1509	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q1510	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q1511	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q1512	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q1513	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q1514	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q1515	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
R1	1-208-855-81	s	RES, CHIP 47 (1005)
R2	1-208-855-81	s	RES, CHIP 47 (1005)
R3	1-208-855-81	s	RES, CHIP 47 (1005)
R4	1-208-855-81	s	RES, CHIP 47 (1005)
R5	1-208-855-81	s	RES, CHIP 47 (1005)
R6	1-208-855-81	s	RES, CHIP 47 (1005)
R7	1-208-855-81	s	RES, CHIP 47 (1005)
R8	1-208-855-81	s	RES, CHIP 47 (1005)
R9	1-208-855-81	s	RES, CHIP 47 (1005)
R10	1-208-855-81	s	RES, CHIP 47 (1005)
R11	1-208-855-81	s	RES, CHIP 47 (1005)
R12	1-208-855-81	s	RES, CHIP 47 (1005)
R13	1-208-855-81	s	RES, CHIP 47 (1005)
R14	1-208-855-81	s	RES, CHIP 47 (1005)
R15	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R16	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R17	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R18	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R20	1-208-855-81	s	RES, CHIP 47 (1005)
R21	1-208-855-81	s	RES, CHIP 47 (1005)
R22	1-208-855-81	s	RES, CHIP 47 (1005)
R23	1-208-855-81	s	RES, CHIP 47 (1005)
R24	1-208-855-81	s	RES, CHIP 47 (1005)
R25	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R26	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R27	1-208-935-81	s	RES, CHIP 100K (1005)
R28	1-208-935-81	s	RES, CHIP 100K (1005)

(DCP-49A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R29	1-208-863-81	s	RES, CHIP 100 (1005)
R30	1-208-863-81	s	RES, CHIP 100 (1005)
R31	1-208-863-81	s	RES, CHIP 100 (1005)
R33	1-208-887-81	s	RES, CHIP 1.0K (1005)
R34	1-208-911-81	s	RES, CHIP 10K (1005)
R35	1-208-863-81	s	RES, CHIP 100 (1005)
R36	1-208-863-81	s	RES, CHIP 100 (1005)
R37	1-208-911-81	s	RES, CHIP 10K (1005)
R38	1-208-911-81	s	RES, CHIP 10K (1005)
R39	1-208-911-81	s	RES, CHIP 10K (1005)
R40	1-208-863-81	s	RES, CHIP 100 (1005)
R41	1-208-855-81	s	RES, CHIP 47 (1005)
R42	1-208-855-81	s	RES, CHIP 47 (1005)
R51	1-208-855-81	s	RES, CHIP 47 (1005)
R52	1-208-855-81	s	RES, CHIP 47 (1005)
R53	1-208-855-81	s	RES, CHIP 47 (1005)
R54	1-208-943-81	s	RES, CHIP 220K (1005)
R56	1-208-943-81	s	RES, CHIP 220K (1005)
R57	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R204	1-208-919-81	s	RES, CHIP 22K (1005)
R206	1-208-895-81	s	RES, CHIP 2.2K (1005)
R207	1-208-879-81	s	RES, CHIP 470 (1005)
R208	1-208-895-81	s	RES, CHIP 2.2K (1005)
R209	1-208-879-81	s	RES, CHIP 470 (1005)
R210	1-208-895-81	s	RES, CHIP 2.2K (1005)
R211	1-208-879-81	s	RES, CHIP 470 (1005)
R213	1-208-860-81	s	RES, CHIP 75 (1005)
R214	1-208-895-81	s	RES, CHIP 2.2K (1005)
R215	1-208-860-81	s	RES, CHIP 75 (1005)
R216	1-208-860-81	s	RES, CHIP 75 (1005)
R217	1-208-895-81	s	RES, CHIP 2.2K (1005)
R218	1-208-895-81	s	RES, CHIP 2.2K (1005)
R220	1-208-911-81	s	RES, CHIP 10K (1005)
R221	1-208-923-81	s	RES, CHIP 33K (1005)
R224	1-208-911-81	s	RES, CHIP 10K (1005)
R225	1-208-871-81	s	RES, CHIP 220 (1005)
R228	1-208-875-81	s	RES, CHIP 330 (1005)
R229	1-208-895-81	s	RES, CHIP 2.2K (1005)
R230	1-220-870-81	s	RES, CHIP 10 (1005)
R231	1-208-935-81	s	RES, CHIP 100K (1005)
R232	1-208-879-81	s	RES, CHIP 470 (1005)
R233	1-208-911-81	s	RES, CHIP 10K (1005)
R234	1-208-911-81	s	RES, CHIP 10K (1005)
R236	1-220-878-81	s	RES, CHIP 22 (1005)
R238	1-208-855-81	s	RES, CHIP 47 (1005)
R240	1-208-935-81	s	RES, CHIP 100K (1005)
R242	1-208-887-81	s	RES, CHIP 1.0K (1005)
R243	1-208-935-81	s	RES, CHIP 100K (1005)
R247	1-220-878-81	s	RES, CHIP 22 (1005)
R248	1-208-935-81	s	RES, CHIP 100K (1005)
R252	1-220-878-81	s	RES, CHIP 22 (1005)
R253	1-220-878-81	s	RES, CHIP 22 (1005)
R254	1-220-878-81	s	RES, CHIP 22 (1005)
R255	1-220-878-81	s	RES, CHIP 22 (1005)
R259	1-220-878-81	s	RES, CHIP 22 (1005)
R260	1-220-878-81	s	RES, CHIP 22 (1005)
R261	1-208-855-81	s	RES, CHIP 47 (1005)
R262	1-220-878-81	s	RES, CHIP 22 (1005)
R264	1-208-855-81	s	RES, CHIP 47 (1005)

(DCP-49A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R265	1-208-855-81	s	RES, CHIP 47 (1005)
R266	1-208-855-81	s	RES, CHIP 47 (1005)
R267	1-208-855-81	s	RES, CHIP 47 (1005)
R268	1-208-855-81	s	RES, CHIP 47 (1005)
R269	1-208-887-81	s	RES, CHIP 1.0K (1005)
R270	1-208-887-81	s	RES, CHIP 1.0K (1005)
R271	1-208-887-81	s	RES, CHIP 1.0K (1005)
R272	1-208-887-81	s	RES, CHIP 1.0K (1005)
R273	1-208-887-81	s	RES, CHIP 1.0K (1005)
R274	1-208-879-81	s	RES, CHIP 470 (1005)
R275	1-220-870-81	s	RES, CHIP 10 (1005)
R276	1-220-870-81	s	RES, CHIP 10 (1005)
R277	1-220-870-81	s	RES, CHIP 10 (1005)
R278	1-220-878-81	s	RES, CHIP 22 (1005)
R279	1-220-878-81	s	RES, CHIP 22 (1005)
R280	1-208-915-81	s	RES, CHIP 15K (1005)
R281	1-208-911-81	s	RES, CHIP 10K (1005)
R282	1-208-935-81	s	RES, CHIP 100K (1005)
R283	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R284	1-208-887-81	s	RES, CHIP 1.0K (1005)
R285	1-208-887-81	s	RES, CHIP 1.0K (1005)
R286	1-208-895-81	s	RES, CHIP 2.2K (1005)
R287	1-208-863-81	s	RES, CHIP 100 (1005)
R288	1-208-863-81	s	RES, CHIP 100 (1005)
R289	1-208-871-81	s	RES, CHIP 220 (1005)
R290	1-208-899-81	s	RES, CHIP 3.3K (1005)
R291	1-208-895-81	s	RES, CHIP 2.2K (1005)
R292	1-208-927-81	s	RES, CHIP 47K (1005)
R293	1-208-863-81	s	RES, CHIP 100 (1005)
R294	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R295	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R296	1-208-863-81	s	RES, CHIP 100 (1005)
R297	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R298	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R308	1-208-879-81	s	RES, CHIP 470 (1005)
R311	1-208-879-81	s	RES, CHIP 470 (1005)
R313	1-208-879-81	s	RES, CHIP 470 (1005)
R319	1-208-879-81	s	RES, CHIP 470 (1005)
R321	1-208-879-81	s	RES, CHIP 470 (1005)
R323	1-208-879-81	s	RES, CHIP 470 (1005)
R324	1-208-887-81	s	RES, CHIP 1.0K (1005)
R325	1-208-887-81	s	RES, CHIP 1.0K (1005)
R326	1-208-887-81	s	RES, CHIP 1.0K (1005)
R327	1-208-887-81	s	RES, CHIP 1.0K (1005)
R328	1-208-887-81	s	RES, CHIP 1.0K (1005)
R329	1-208-887-81	s	RES, CHIP 1.0K (1005)
R332	1-208-887-81	s	RES, CHIP 1.0K (1005)
R333	1-208-887-81	s	RES, CHIP 1.0K (1005)
R334	1-208-887-81	s	RES, CHIP 1.0K (1005)
R335	1-208-887-81	s	RES, CHIP 1.0K (1005)
R337	1-208-887-81	s	RES, CHIP 1.0K (1005)
R338	1-208-887-81	s	RES, CHIP 1.0K (1005)
R345	1-208-875-81	s	RES, CHIP 330 (1005)
R346	1-208-875-81	s	RES, CHIP 330 (1005)
R347	1-208-875-81	s	RES, CHIP 330 (1005)
R348	1-208-903-81	s	RES, CHIP 4.7K (1005)
R349	1-208-903-81	s	RES, CHIP 4.7K (1005)
R350	1-208-903-81	s	RES, CHIP 4.7K (1005)
R351	1-208-903-81	s	RES, CHIP 4.7K (1005)

(DCP-49A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R352	1-208-903-81	s	RES, CHIP 4.7K (1005)
R353	1-208-903-81	s	RES, CHIP 4.7K (1005)
R354	1-208-935-81	s	RES, CHIP 100K (1005)
R356	1-208-935-81	s	RES, CHIP 100K (1005)
R358	1-208-935-81	s	RES, CHIP 100K (1005)
R359	1-208-859-81	s	RES, CHIP 68 (1005)
R360	1-208-859-81	s	RES, CHIP 68 (1005)
R361	1-208-859-81	s	RES, CHIP 68 (1005)
R363	1-208-875-81	s	RES, CHIP 330 (1005)
R364	1-208-875-81	s	RES, CHIP 330 (1005)
R365	1-208-875-81	s	RES, CHIP 330 (1005)
R366	1-208-883-81	s	RES, CHIP 680 (1005)
R367	1-208-879-81	s	RES, CHIP 470 (1005)
R368	1-208-883-81	s	RES, CHIP 680 (1005)
R369	1-208-911-81	s	RES, CHIP 10K (1005)
R370	1-208-911-81	s	RES, CHIP 10K (1005)
R371	1-220-878-81	s	RES, CHIP 22 (1005)
R372	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R373	1-208-863-81	s	RES, CHIP 100 (1005)
R374	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R375	1-220-878-81	s	RES, CHIP 22 (1005)
R376	1-220-878-81	s	RES, CHIP 22 (1005)
R377	1-220-878-81	s	RES, CHIP 22 (1005)
R378	1-208-855-81	s	RES, CHIP 47 (1005)
R379	1-208-855-81	s	RES, CHIP 47 (1005)
R380	1-208-855-81	s	RES, CHIP 47 (1005)
R381	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R382	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R383	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R384	1-208-911-81	s	RES, CHIP 10K (1005)
R385	1-208-911-81	s	RES, CHIP 10K (1005)
R386	1-208-911-81	s	RES, CHIP 10K (1005)
R387	1-208-903-81	s	RES, CHIP 4.7K (1005)
R388	1-208-919-81	s	RES, CHIP 22K (1005)
R389	1-208-919-81	s	RES, CHIP 22K (1005)
R390	1-208-919-81	s	RES, CHIP 22K (1005)
R392	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R393	1-208-935-81	s	RES, CHIP 100K (1005)
R395	1-208-863-81	s	RES, CHIP 100 (1005)
R396	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R397	1-220-878-81	s	RES, CHIP 22 (1005)
R398	1-220-878-81	s	RES, CHIP 22 (1005)
R399	1-220-878-81	s	RES, CHIP 22 (1005)
R400	1-208-863-81	s	RES, CHIP 100 (1005)
R401	1-208-871-81	s	RES, CHIP 220 (1005)
R403	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R405	1-208-939-81	s	RES, CHIP 150K (1005)
R406	1-208-923-81	s	RES, CHIP 33K (1005)
R407	1-208-923-81	s	RES, CHIP 33K (1005)
R408	1-208-903-81	s	RES, CHIP 4.7K (1005)
R410	1-208-871-81	s	RES, CHIP 220 (1005)
R411	1-208-959-81	s	RES, CHIP 1M (1005)
R412	1-208-959-81	s	RES, CHIP 1M (1005)
R413	1-208-887-81	s	RES, CHIP 1.0K (1005)
R414	1-208-911-81	s	RES, CHIP 10K (1005)
R415	1-208-915-81	s	RES, CHIP 15K (1005)
R417	1-208-931-81	s	RES, CHIP 68K (1005)
R418	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R419	1-208-931-81	s	RES, CHIP 68K (1005)

(DCP-49A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R420	1-208-923-81	s	RES, CHIP 33K (1005)
R421	1-208-923-81	s	RES, CHIP 33K (1005)
R422	1-208-903-81	s	RES, CHIP 4.7K (1005)
R424	1-208-939-81	s	RES, CHIP 150K (1005)
R425	1-208-943-81	s	RES, CHIP 220K (1005)
R426	1-208-927-81	s	RES, CHIP 47K (1005)
R427	1-208-943-81	s	RES, CHIP 220K (1005)
R428	1-208-927-81	s	RES, CHIP 47K (1005)
R431	1-208-911-81	s	RES, CHIP 10K (1005)
R432	1-208-911-81	s	RES, CHIP 10K (1005)
R433	1-208-935-81	s	RES, CHIP 100K (1005)
R434	1-208-911-81	s	RES, CHIP 10K (1005)
R435	1-208-911-81	s	RES, CHIP 10K (1005)
R436	1-208-931-81	s	RES, CHIP 68K (1005)
R437	1-208-947-81	s	RES, CHIP 330K (1005)
R438	1-208-911-81	s	RES, CHIP 10K (1005)
R439	1-208-935-81	s	RES, CHIP 100K (1005)
R440	1-208-915-81	s	RES, CHIP 15K (1005)
R441	1-208-903-81	s	RES, CHIP 4.7K (1005)
R442	1-208-903-81	s	RES, CHIP 4.7K (1005)
R447	1-208-927-81	s	RES, CHIP 47K (1005)
R448	1-208-915-81	s	RES, CHIP 15K (1005)
R449	1-208-903-81	s	RES, CHIP 4.7K (1005)
R450	1-208-919-81	s	RES, CHIP 22K (1005)
R451	1-208-919-81	s	RES, CHIP 22K (1005)
R452	1-208-903-81	s	RES, CHIP 4.7K (1005)
R453	1-208-919-81	s	RES, CHIP 22K (1005)
R454	1-208-931-81	s	RES, CHIP 68K (1005)
R455	1-208-911-81	s	RES, CHIP 10K (1005)
R456	1-208-863-81	s	RES, CHIP 100 (1005)
R457	1-208-911-81	s	RES, CHIP 10K (1005)
R458	1-208-863-81	s	RES, CHIP 100 (1005)
R459	1-208-863-81	s	RES, CHIP 100 (1005)
R460	1-208-863-81	s	RES, CHIP 100 (1005)
R461	1-208-863-81	s	RES, CHIP 100 (1005)
R462	1-208-863-81	s	RES, CHIP 100 (1005)
R463	1-208-895-81	s	RES, CHIP 2.2K (1005)
R464	1-208-895-81	s	RES, CHIP 2.2K (1005)
R465	1-208-927-81	s	RES, CHIP 47K (1005)
R466	1-208-915-81	s	RES, CHIP 15K (1005)
R467	1-208-911-81	s	RES, CHIP 10K (1005)
R468	1-208-895-81	s	RES, CHIP 2.2K (1005)
R470	1-208-919-81	s	RES, CHIP 22K (1005)
R471	1-208-911-81	s	RES, CHIP 10K (1005)
R472	1-208-863-81	s	RES, CHIP 100 (1005)
R473	1-208-927-81	s	RES, CHIP 47K (1005)
R474	1-208-935-81	s	RES, CHIP 100K (1005)
R475	1-208-927-81	s	RES, CHIP 47K (1005)
R476	1-208-895-81	s	RES, CHIP 2.2K (1005)
R477	1-208-887-81	s	RES, CHIP 1.0K (1005)
R478	1-208-895-81	s	RES, CHIP 2.2K (1005)
R479	1-208-911-81	s	RES, CHIP 10K (1005)
R480	1-220-870-81	s	RES, CHIP 10 (1005)
R481	1-208-911-81	s	RES, CHIP 10K (1005)
R482	1-220-870-81	s	RES, CHIP 10 (1005)
R483	1-208-919-81	s	RES, CHIP 22K (1005)
R484	1-220-870-81	s	RES, CHIP 10 (1005)
R487	1-208-911-81	s	RES, CHIP 10K (1005)
R488	1-208-863-81	s	RES, CHIP 100 (1005)

(DCP-49A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R489	1-220-870-81	s	RES, CHIP 10 (1005)
R490	1-208-855-81	s	RES, CHIP 47 (1005)
R491	1-208-863-81	s	RES, CHIP 100 (1005)
R492	1-208-943-81	s	RES, CHIP 220K (1005)
R500	1-208-863-81	s	RES, CHIP 100 (1005)
R501	1-208-863-81	s	RES, CHIP 100 (1005)
R502	1-208-911-81	s	RES, CHIP 10K (1005)
R503	1-208-911-81	s	RES, CHIP 10K (1005)
R505	1-208-863-81	s	RES, CHIP 100 (1005)
R506	1-208-863-81	s	RES, CHIP 100 (1005)
R507	1-208-927-81	s	RES, CHIP 47K (1005)
R508	1-208-927-81	s	RES, CHIP 47K (1005)
R511	1-208-863-81	s	RES, CHIP 100 (1005)
R513	1-208-863-81	s	RES, CHIP 100 (1005)
R514	1-208-863-81	s	RES, CHIP 100 (1005)
R515	1-208-863-81	s	RES, CHIP 100 (1005)
R519	1-208-863-81	s	RES, CHIP 100 (1005)
R520	1-208-863-81	s	RES, CHIP 100 (1005)
R524	1-220-878-81	s	RES, CHIP 22 (1005)
R526	1-220-878-81	s	RES, CHIP 22 (1005)
R528	1-220-878-81	s	RES, CHIP 22 (1005)
R537	1-208-863-81	s	RES, CHIP 100 (1005)
R545	1-208-863-81	s	RES, CHIP 100 (1005)
R600	1-208-863-81	s	RES, CHIP 100 (1005)
R601	1-208-895-81	s	RES, CHIP 2.2K (1005)
R602	1-208-895-81	s	RES, CHIP 2.2K (1005)
R604	1-208-855-81	s	RES, CHIP 47 (1005)
R605	1-208-855-81	s	RES, CHIP 47 (1005)
R606	1-208-863-81	s	RES, CHIP 100 (1005)
R607	1-208-863-81	s	RES, CHIP 100 (1005)
R608	1-208-863-81	s	RES, CHIP 100 (1005)
R609	1-208-855-81	s	RES, CHIP 47 (1005)
R610	1-208-911-81	s	RES, CHIP 10K (1005)
R611	1-208-863-81	s	RES, CHIP 100 (1005)
R612	1-208-863-81	s	RES, CHIP 100 (1005)
R613	1-208-863-81	s	RES, CHIP 100 (1005)
R614	1-208-863-81	s	RES, CHIP 100 (1005)
R615	1-208-863-81	s	RES, CHIP 100 (1005)
R800	1-208-863-81	s	RES, CHIP 100 (1005)
R801	1-208-863-81	s	RES, CHIP 100 (1005)
R802	1-208-863-81	s	RES, CHIP 100 (1005)
R803	1-208-863-81	s	RES, CHIP 100 (1005)
R804	1-208-863-81	s	RES, CHIP 100 (1005)
R805	1-208-863-81	s	RES, CHIP 100 (1005)
R806	1-208-911-81	s	RES, CHIP 10K (1005)
R807	1-208-911-81	s	RES, CHIP 10K (1005)
R808	1-208-863-81	s	RES, CHIP 100 (1005)
R809	1-208-863-81	s	RES, CHIP 100 (1005)
R810	1-208-863-81	s	RES, CHIP 100 (1005)
R811	1-208-863-81	s	RES, CHIP 100 (1005)
R812	1-208-911-81	s	RES, CHIP 10K (1005)
R813	1-208-911-81	s	RES, CHIP 10K (1005)
R814	1-208-911-81	s	RES, CHIP 10K (1005)
R815	1-208-863-81	s	RES, CHIP 100 (1005)
R816	1-208-863-81	s	RES, CHIP 100 (1005)
R817	1-208-911-81	s	RES, CHIP 10K (1005)
R818	1-208-911-81	s	RES, CHIP 10K (1005)
R819	1-208-863-81	s	RES, CHIP 100 (1005)
R820	1-208-863-81	s	RES, CHIP 100 (1005)

(DCP-49A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R821	1-208-911-81	s	RES, CHIP 10K (1005)
R822	1-208-863-81	s	RES, CHIP 100 (1005)
R823	1-208-863-81	s	RES, CHIP 100 (1005)
R824	1-208-911-81	s	RES, CHIP 10K (1005)
R825	1-208-863-81	s	RES, CHIP 100 (1005)
R826	1-208-863-81	s	RES, CHIP 100 (1005)
R827	1-208-911-81	s	RES, CHIP 10K (1005)
R828	1-208-863-81	s	RES, CHIP 100 (1005)
R830	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R831	1-208-911-81	s	RES, CHIP 10K (1005)
R832	1-208-863-81	s	RES, CHIP 100 (1005)
R833	1-208-863-81	s	RES, CHIP 100 (1005)
R834	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R835	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R836	1-208-855-81	s	RES, CHIP 47 (1005)
R837	1-220-878-81	s	RES, CHIP 22 (1005)
R838	1-220-878-81	s	RES, CHIP 22 (1005)
R1001	1-208-863-81	s	RES, CHIP 100 (1005)
R1002	1-208-863-81	s	RES, CHIP 100 (1005)
R1003	1-220-870-81	s	RES, CHIP 10 (1005)
R1004	1-220-870-81	s	RES, CHIP 10 (1005)
R1006	1-208-863-81	s	RES, CHIP 100 (1005)
R1008	1-208-863-81	s	RES, CHIP 100 (1005)
R1009	1-208-863-81	s	RES, CHIP 100 (1005)
R1010	1-208-863-81	s	RES, CHIP 100 (1005)
R1011	1-208-863-81	s	RES, CHIP 100 (1005)
R1012	1-208-863-81	s	RES, CHIP 100 (1005)
R1013	1-208-863-81	s	RES, CHIP 100 (1005)
R1015	1-220-870-81	s	RES, CHIP 10 (1005)
R1016	1-220-870-81	s	RES, CHIP 10 (1005)
R1017	1-208-863-81	s	RES, CHIP 100 (1005)
R1018	1-208-863-81	s	RES, CHIP 100 (1005)
R1019	1-208-863-81	s	RES, CHIP 100 (1005)
R1022	1-208-863-81	s	RES, CHIP 100 (1005)
R1025	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1026	1-208-935-81	s	RES, CHIP 100K (1005)
R1029	1-220-870-81	s	RES, CHIP 10 (1005)
R1030	1-208-935-81	s	RES, CHIP 100K (1005)
R1031	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1032	1-220-878-81	s	RES, CHIP 22 (1005)
R1033	1-220-878-81	s	RES, CHIP 22 (1005)
R1034	1-220-878-81	s	RES, CHIP 22 (1005)
R1035	1-220-878-81	s	RES, CHIP 22 (1005)
R1036	1-220-878-81	s	RES, CHIP 22 (1005)
R1037	1-220-878-81	s	RES, CHIP 22 (1005)
R1038	1-220-878-81	s	RES, CHIP 22 (1005)
R1039	1-220-878-81	s	RES, CHIP 22 (1005)
R1040	1-208-863-81	s	RES, CHIP 100 (1005)
R1042	1-220-870-81	s	RES, CHIP 10 (1005)
R1100	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1101	1-208-863-81	s	RES, CHIP 100 (1005)
R1102	1-208-863-81	s	RES, CHIP 100 (1005)
R1103	1-208-943-81	s	RES, CHIP 220K (1005)
R1104	1-220-870-81	s	RES, CHIP 10 (1005)
R1105	1-208-863-81	s	RES, CHIP 100 (1005)
R1106	1-208-863-81	s	RES, CHIP 100 (1005)
R1107	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1108	1-208-935-81	s	RES, CHIP 100K (1005)
R1109	1-208-863-81	s	RES, CHIP 100 (1005)

(DCP-49A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1110	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1111	1-208-911-81	s	RES, CHIP 10K (1005)
R1112	1-208-911-81	s	RES, CHIP 10K (1005)
R1113	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1114	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1115	1-208-875-81	s	RES, CHIP 330 (1005)
R1116	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1118	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1119	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1120	1-208-863-81	s	RES, CHIP 100 (1005)
R1121	1-208-863-81	s	RES, CHIP 100 (1005)
R1122	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1123	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1124	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1125	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1126	1-208-860-81	s	RES, CHIP 75 (1005)
R1127	1-208-943-81	s	RES, CHIP 220K (1005)
R1128	1-208-855-81	s	RES, CHIP 47 (1005)
R1129	1-220-870-81	s	RES, CHIP 10 (1005)
R1130	1-208-860-81	s	RES, CHIP 75 (1005)
R1133	1-220-882-81	s	RES, CHIP 33 (1005)
R1134	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1135	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1137	1-208-863-81	s	RES, CHIP 100 (1005)
R1138	1-208-943-81	s	RES, CHIP 220K (1005)
R1139	1-208-943-81	s	RES, CHIP 220K (1005)
R1141	1-208-943-81	s	RES, CHIP 220K (1005)
R1146	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1147	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1148	1-208-911-81	s	RES, CHIP 10K (1005)
R1149	1-208-915-81	s	RES, CHIP 15K (1005)
R1150	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1151	1-220-878-81	s	RES, CHIP 22 (1005)
R1155	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1156	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1166	1-220-882-81	s	RES, CHIP 33 (1005)
R1167	1-220-882-81	s	RES, CHIP 33 (1005)
R1172	1-208-856-81	s	RES, CHIP 51 (1005)
R1173	1-208-856-81	s	RES, CHIP 51 (1005)
R1174	1-208-856-81	s	RES, CHIP 51 (1005)
R1175	1-208-856-81	s	RES, CHIP 51 (1005)
R1178	1-220-878-81	s	RES, CHIP 22 (1005)
R1179	1-208-883-81	s	RES, CHIP 680 (1005)
R1180	1-220-878-81	s	RES, CHIP 22 (1005)
R1181	1-208-883-81	s	RES, CHIP 680 (1005)
R1182	1-208-860-81	s	RES, CHIP 75 (1005)
R1183	1-208-860-81	s	RES, CHIP 75 (1005)
R1184	1-208-860-81	s	RES, CHIP 75 (1005)
R1185	1-208-860-81	s	RES, CHIP 75 (1005)
R1186	1-208-867-81	s	RES, CHIP 150 (1005)
R1187	1-208-867-81	s	RES, CHIP 150 (1005)
R1192	1-208-911-81	s	RES, CHIP 10K (1005)
R1193	1-208-911-81	s	RES, CHIP 10K (1005)
R1194	1-220-882-81	s	RES, CHIP 33 (1005)
R1198	1-208-856-81	s	RES, CHIP 51 (1005)
R1200	1-208-856-81	s	RES, CHIP 51 (1005)
R1203	1-220-878-81	s	RES, CHIP 22 (1005)
R1204	1-208-883-81	s	RES, CHIP 680 (1005)
R1205	1-208-860-81	s	RES, CHIP 75 (1005)

(DCP-49A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1206	1-208-860-81	s	RES, CHIP 75 (1005)
R1207	1-208-867-81	s	RES, CHIP 150 (1005)
R1210	1-208-911-81	s	RES, CHIP 10K (1005)
R1213	1-208-959-81	s	RES, CHIP 1M (1005)
R1214	1-208-959-81	s	RES, CHIP 1M (1005)
R1215	1-208-915-81	s	RES, CHIP 15K (1005)
R1216	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1217	1-208-935-81	s	RES, CHIP 100K (1005)
R1218	1-208-943-81	s	RES, CHIP 220K (1005)
R1219	1-208-935-81	s	RES, CHIP 100K (1005)
R1220	1-208-927-81	s	RES, CHIP 47K (1005)
R1221	1-208-935-81	s	RES, CHIP 100K (1005)
R1222	1-208-927-81	s	RES, CHIP 47K (1005)
R1223	1-220-878-81	s	RES, CHIP 22 (1005)
R1224	1-220-878-81	s	RES, CHIP 22 (1005)
R1231	1-208-860-81	s	RES, CHIP 75 (1005)
R1232	1-208-943-81	s	RES, CHIP 220K (1005)
R1233	1-208-943-81	s	RES, CHIP 220K (1005)
R1234	1-208-943-81	s	RES, CHIP 220K (1005)
R1235	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1237	1-208-863-81	s	RES, CHIP 100 (1005)
R1238	1-208-911-81	s	RES, CHIP 10K (1005)
R1300	1-208-959-81	s	RES, CHIP 1M (1005)
R1301	1-208-959-81	s	RES, CHIP 1M (1005)
R1302	1-208-959-81	s	RES, CHIP 1M (1005)
R1303	1-208-959-81	s	RES, CHIP 1M (1005)
R1304	1-208-915-81	s	RES, CHIP 15K (1005)
R1305	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1306	1-208-915-81	s	RES, CHIP 15K (1005)
R1307	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1308	1-208-935-81	s	RES, CHIP 100K (1005)
R1309	1-208-943-81	s	RES, CHIP 220K (1005)
R1310	1-208-935-81	s	RES, CHIP 100K (1005)
R1311	1-208-935-81	s	RES, CHIP 100K (1005)
R1312	1-208-943-81	s	RES, CHIP 220K (1005)
R1313	1-208-935-81	s	RES, CHIP 100K (1005)
R1314	1-208-935-81	s	RES, CHIP 100K (1005)
R1315	1-208-935-81	s	RES, CHIP 100K (1005)
R1316	1-208-935-81	s	RES, CHIP 100K (1005)
R1317	1-208-935-81	s	RES, CHIP 100K (1005)
R1318	1-208-911-81	s	RES, CHIP 10K (1005)
R1319	1-208-895-81	s	RES, CHIP 2.2K (1005)
R1320	1-208-935-81	s	RES, CHIP 100K (1005)
R1321	1-208-959-81	s	RES, CHIP 1M (1005)
R1322	1-208-959-81	s	RES, CHIP 1M (1005)
R1323	1-208-915-81	s	RES, CHIP 15K (1005)
R1324	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1325	1-208-959-81	s	RES, CHIP 1M (1005)
R1326	1-208-959-81	s	RES, CHIP 1M (1005)
R1327	1-208-915-81	s	RES, CHIP 15K (1005)
R1328	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1329	1-208-935-81	s	RES, CHIP 100K (1005)
R1330	1-208-943-81	s	RES, CHIP 220K (1005)
R1331	1-208-935-81	s	RES, CHIP 100K (1005)
R1332	1-208-935-81	s	RES, CHIP 100K (1005)
R1333	1-208-943-81	s	RES, CHIP 220K (1005)
R1334	1-208-935-81	s	RES, CHIP 100K (1005)
R1335	1-208-935-81	s	RES, CHIP 100K (1005)
R1336	1-208-935-81	s	RES, CHIP 100K (1005)

(DCP-49A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1337	1-208-935-81	s	RES, CHIP 100K (1005)
R1338	1-208-935-81	s	RES, CHIP 100K (1005)
R1339	1-208-935-81	s	RES, CHIP 100K (1005)
R1340	1-208-935-81	s	RES, CHIP 100K (1005)
R1341	1-208-919-81	s	RES, CHIP 22K (1005)
R1342	1-208-855-81	s	RES, CHIP 47 (1005)
R1343	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1345	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1346	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1347	1-208-907-81	s	RES, CHIP 6.8K (1005)
R1348	1-208-863-81	s	RES, CHIP 100 (1005)
R1349	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1350	1-208-959-81	s	RES, CHIP 1M (1005)
R1351	1-208-863-81	s	RES, CHIP 100 (1005)
R1352	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1354	1-208-927-81	s	RES, CHIP 47K (1005)
R1355	1-208-915-81	s	RES, CHIP 15K (1005)
R1357	1-208-959-81	s	RES, CHIP 1M (1005)
R1358	1-208-959-81	s	RES, CHIP 1M (1005)
R1359	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1360	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1361	1-208-935-81	s	RES, CHIP 100K (1005)
R1362	1-208-935-81	s	RES, CHIP 100K (1005)
R1363	1-208-911-81	s	RES, CHIP 10K (1005)
R1364	1-208-911-81	s	RES, CHIP 10K (1005)
R1365	1-208-943-81	s	RES, CHIP 220K (1005)
R1366	1-208-927-81	s	RES, CHIP 47K (1005)
R1367	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1368	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1369	1-208-891-81	s	RES, CHIP 1.5K (1005)
R1371	1-208-935-81	s	RES, CHIP 100K (1005)
R1372	1-208-863-81	s	RES, CHIP 100 (1005)
R1373	1-220-870-81	s	RES, CHIP 10 (1005)
R1374	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1375	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1376	1-208-863-81	s	RES, CHIP 100 (1005)
R1377	1-208-863-81	s	RES, CHIP 100 (1005)
R1378	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1379	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1380	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1381	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1382	1-208-911-81	s	RES, CHIP 10K (1005)
R1383	1-208-911-81	s	RES, CHIP 10K (1005)
R1384	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1385	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1386	1-208-863-81	s	RES, CHIP 100 (1005)
R1387	1-208-863-81	s	RES, CHIP 100 (1005)
R1388	1-208-863-81	s	RES, CHIP 100 (1005)
R1389	1-208-863-81	s	RES, CHIP 100 (1005)
R1391	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1392	1-208-959-81	s	RES, CHIP 1M (1005)
R1393	1-208-943-81	s	RES, CHIP 220K (1005)
R1395	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1396	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1397	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1398	1-208-927-81	s	RES, CHIP 47K (1005)
R1399	1-208-927-81	s	RES, CHIP 47K (1005)
R1401	1-208-863-81	s	RES, CHIP 100 (1005)
R1402	1-208-927-81	s	RES, CHIP 47K (1005)

(DCP-49A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1403	1-208-863-81	s	RES, CHIP 100 (1005)
R1404	1-208-863-81	s	RES, CHIP 100 (1005)
R1406	1-208-863-81	s	RES, CHIP 100 (1005)
R1408	1-208-863-81	s	RES, CHIP 100 (1005)
R1501	1-208-863-81	s	RES, CHIP 100 (1005)
R1502	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1503	1-208-863-81	s	RES, CHIP 100 (1005)
R1504	1-208-863-81	s	RES, CHIP 100 (1005)
R1505	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1506	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1507	1-208-863-81	s	RES, CHIP 100 (1005)
R1508	1-208-923-81	s	RES, CHIP 33K (1005)
R1509	1-208-879-81	s	RES, CHIP 470 (1005)
R1510	1-208-867-81	s	RES, CHIP 150 (1005)
R1511	1-208-895-81	s	RES, CHIP 2.2K (1005)
R1512	1-208-899-81	s	RES, CHIP 3.3K (1005)
R1513	1-208-899-81	s	RES, CHIP 3.3K (1005)
R1514	1-208-879-81	s	RES, CHIP 470 (1005)
R1515	1-208-875-81	s	RES, CHIP 330 (1005)
R1516	1-208-863-81	s	RES, CHIP 100 (1005)
R1517	1-208-883-81	s	RES, CHIP 680 (1005)
R1518	1-208-911-81	s	RES, CHIP 10K (1005)
R1519	1-208-873-81	s	RES, CHIP 270 (1005)
R1521	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1522	1-208-907-81	s	RES, CHIP 6.8K (1005)
R1523	1-208-879-81	s	RES, CHIP 470 (1005)
R1524	1-220-878-81	s	RES, CHIP 22 (1005)
R1525	1-208-863-81	s	RES, CHIP 100 (1005)
R1526	1-208-863-81	s	RES, CHIP 100 (1005)
R1527	1-208-863-81	s	RES, CHIP 100 (1005)
R1528	1-208-863-81	s	RES, CHIP 100 (1005)
R1529	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1530	1-208-935-81	s	RES, CHIP 100K (1005)
R1531	1-220-878-81	s	RES, CHIP 22 (1005)
R1532	1-220-870-81	s	RES, CHIP 10 (1005)
R1533	1-220-878-81	s	RES, CHIP 22 (1005)
R1535	1-208-871-81	s	RES, CHIP 220 (1005)
R1536	1-208-863-81	s	RES, CHIP 100 (1005)
R1539	1-220-878-81	s	RES, CHIP 22 (1005)
R1540	1-220-878-81	s	RES, CHIP 22 (1005)
R1541	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1542	1-208-955-81	s	RES, CHIP 680K (1005)
R1543	1-208-891-81	s	RES, CHIP 1.5K (1005)
R1544	1-208-855-81	s	RES, CHIP 47 (1005)
R1545	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1546	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1547	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1548	1-208-891-81	s	RES, CHIP 1.5K (1005)
R1551	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1554	1-208-875-81	s	RES, CHIP 330 (1005)
R1555	1-208-873-81	s	RES, CHIP 270 (1005)
R1556	1-208-855-81	s	RES, CHIP 47 (1005)
R1557	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1558	1-220-882-81	s	RES, CHIP 33 (1005)
R1559	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1562	1-208-863-81	s	RES, CHIP 100 (1005)
R1563	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1564	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1565	1-220-878-81	s	RES, CHIP 22 (1005)

(DCP-49A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1566	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1567	1-208-863-81	s	RES, CHIP 100 (1005)
R1568	1-208-863-81	s	RES, CHIP 100 (1005)
R1569	1-208-863-81	s	RES, CHIP 100 (1005)
R1570	1-208-863-81	s	RES, CHIP 100 (1005)
R1571	1-220-878-81	s	RES, CHIP 22 (1005)
R1572	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1573	1-208-891-81	s	RES, CHIP 1.5K (1005)
R1574	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1575	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1576	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1577	1-208-891-81	s	RES, CHIP 1.5K (1005)
R1578	1-208-863-81	s	RES, CHIP 100 (1005)
R1579	1-208-863-81	s	RES, CHIP 100 (1005)
R1580	1-208-860-81	s	RES, CHIP 75 (1005)
R1581	1-208-923-81	s	RES, CHIP 33K (1005)
R1582	1-208-860-81	s	RES, CHIP 75 (1005)
R1583	1-208-959-81	s	RES, CHIP 1M (1005)
R1584	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1585	1-208-899-81	s	RES, CHIP 3.3K (1005)
R1586	1-208-919-81	s	RES, CHIP 22K (1005)
R1587	1-208-923-81	s	RES, CHIP 33K (1005)
R1588	1-208-923-81	s	RES, CHIP 33K (1005)
R1589	1-208-895-81	s	RES, CHIP 2.2K (1005)
R1590	1-208-959-81	s	RES, CHIP 1M (1005)
R1591	1-208-911-81	s	RES, CHIP 10K (1005)
R1592	1-208-927-81	s	RES, CHIP 47K (1005)
R1593	1-208-855-81	s	RES, CHIP 47 (1005)
R1594	1-208-935-81	s	RES, CHIP 100K (1005)
R1595	1-208-895-81	s	RES, CHIP 2.2K (1005)
R1596	1-208-855-81	s	RES, CHIP 47 (1005)
R1597	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1598	1-208-935-81	s	RES, CHIP 100K (1005)
R1599	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1600	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1601	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1602	1-208-895-81	s	RES, CHIP 2.2K (1005)
R1603	1-208-883-81	s	RES, CHIP 680 (1005)
R1604	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1605	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1606	1-208-899-81	s	RES, CHIP 3.3K (1005)
R1607	1-208-899-81	s	RES, CHIP 3.3K (1005)
R1608	1-208-899-81	s	RES, CHIP 3.3K (1005)
R1609	1-208-875-81	s	RES, CHIP 330 (1005)
R1610	1-208-895-81	s	RES, CHIP 2.2K (1005)
R1611	1-208-895-81	s	RES, CHIP 2.2K (1005)
R1612	1-208-875-81	s	RES, CHIP 330 (1005)
R1613	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1614	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1615	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1616	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1617	1-208-883-81	s	RES, CHIP 680 (1005)
R1618	1-208-875-81	s	RES, CHIP 330 (1005)
R1619	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1620	1-208-871-81	s	RES, CHIP 220 (1005)
R1621	1-208-871-81	s	RES, CHIP 220 (1005)
R1622	1-208-871-81	s	RES, CHIP 220 (1005)
R1623	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1624	1-220-878-81	s	RES, CHIP 22 (1005)

(DCP-49A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1626	1-208-863-81	s	RES, CHIP 100 (1005)
R1627	1-208-860-81	s	RES, CHIP 75 (1005)
R1628	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1629	1-220-878-81	s	RES, CHIP 22 (1005)
R1630	1-220-878-81	s	RES, CHIP 22 (1005)
R1631	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1632	1-208-891-81	s	RES, CHIP 1.5K (1005)
R1633	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1634	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1635	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1636	1-208-891-81	s	RES, CHIP 1.5K (1005)
R1637	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1638	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1639	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1640	1-208-891-81	s	RES, CHIP 1.5K (1005)
R1642	1-208-879-81	s	RES, CHIP 470 (1005)
R1643	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1644	1-208-891-81	s	RES, CHIP 1.5K (1005)
R1645	1-220-878-81	s	RES, CHIP 22 (1005)
R1646	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1647	1-220-878-81	s	RES, CHIP 22 (1005)
R1648	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1649	1-208-891-81	s	RES, CHIP 1.5K (1005)
R1650	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1651	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1652	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1653	1-208-891-81	s	RES, CHIP 1.5K (1005)
R1654	1-208-860-81	s	RES, CHIP 75 (1005)
R1655	1-208-855-81	s	RES, CHIP 47 (1005)
R1656	1-208-935-81	s	RES, CHIP 100K (1005)
R1657	1-208-895-81	s	RES, CHIP 2.2K (1005)
R1658	1-208-895-81	s	RES, CHIP 2.2K (1005)
R1659	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1660	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1661	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1662	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1663	1-208-883-81	s	RES, CHIP 680 (1005)
R1664	1-208-899-81	s	RES, CHIP 3.3K (1005)
R1665	1-208-875-81	s	RES, CHIP 330 (1005)
R1666	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1667	1-208-863-81	s	RES, CHIP 100 (1005)
R1668	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1670	1-208-860-81	s	RES, CHIP 75 (1005)
R1671	1-208-860-81	s	RES, CHIP 75 (1005)
R1673	1-208-863-81	s	RES, CHIP 100 (1005)
R1675	1-208-927-81	s	RES, CHIP 47K (1005)
R1676	1-208-863-81	s	RES, CHIP 100 (1005)
R1677	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1678	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1679	1-208-899-81	s	RES, CHIP 3.3K (1005)
R1681	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1682	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1683	1-208-863-81	s	RES, CHIP 100 (1005)
R1684	1-208-863-81	s	RES, CHIP 100 (1005)
R1685	1-208-863-81	s	RES, CHIP 100 (1005)
R1686	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1688	1-208-895-81	s	RES, CHIP 2.2K (1005)
R1689	1-208-911-81	s	RES, CHIP 10K (1005)
R1690	1-208-911-81	s	RES, CHIP 10K (1005)

(DCP-49A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1691	1-208-911-81	s	RES, CHIP 10K (1005)
R1692	1-208-915-81	s	RES, CHIP 15K (1005)
R1693	1-220-878-81	s	RES, CHIP 22 (1005)
R1694	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1695	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1697	1-218-990-81	s	CONDUCTOR, CHIP (1005)
RB300	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB301	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB302	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB303	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB304	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB305	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB306	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB307	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB308	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB309	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB310	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB311	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB312	1-234-382-21	s	RES, NETWORK 220K (1005X4)
RB313	1-234-382-21	s	RES, NETWORK 220K (1005X4)
RB314	1-234-382-21	s	RES, NETWORK 220K (1005X4)
RB315	1-234-382-21	s	RES, NETWORK 220K (1005X4)
RB316	1-234-382-21	s	RES, NETWORK 220K (1005X4)
RB317	1-234-382-21	s	RES, NETWORK 220K (1005X4)
RB318	1-234-382-21	s	RES, NETWORK 220K (1005X4)
RB319	1-234-382-21	s	RES, NETWORK 220K (1005X4)
RB320	1-234-382-21	s	RES, NETWORK 220K (1005X4)
RB321	1-234-382-21	s	RES, NETWORK 220K (1005X4)
RB322	1-234-382-21	s	RES, NETWORK 220K (1005X4)
RB323	1-234-382-21	s	RES, NETWORK 220K (1005X4)
RB400	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB500	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB501	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB503	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB504	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB505	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB506	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB507	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB508	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB600	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB601	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB602	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB603	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB604	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB605	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB606	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB607	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB608	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB609	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB610	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB611	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB612	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB613	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB614	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB615	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB616	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB617	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB618	1-234-372-21	s	RES, NETWORK 100 (1005X4)

(DCP-49A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB619	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB800	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB801	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB802	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB803	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB804	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB805	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB806	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB807	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB808	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB809	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB810	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB811	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB812	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB813	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB814	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB815	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB816	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB817	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB818	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB819	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB820	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB821	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB822	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB823	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB824	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB825	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB826	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB827	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB828	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB829	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB830	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB831	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB832	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB833	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB834	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB835	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB836	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB837	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB838	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB839	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB840	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB841	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB842	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB843	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB844	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB845	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB846	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB847	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB848	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB849	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB850	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB851	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB852	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB853	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB854	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB865	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB866	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB867	1-234-372-21	s	RES, NETWORK 100 (1005X4)

(DCP-49A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB868	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB869	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB870	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB871	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB872	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB873	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB874	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB875	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB876	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB877	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB878	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB879	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB880	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB881	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB882	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB883	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB884	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1000	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1001	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1002	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1003	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1004	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1005	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1006	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1007	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1008	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1009	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1010	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1011	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1012	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1013	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1014	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1015	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1016	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1018	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1019	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1020	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1021	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1022	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1023	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1024	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1025	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1026	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1027	1-234-369-21	s	RES, NETWORK 10 (1005X4)
RB1028	1-234-369-21	s	RES, NETWORK 10 (1005X4)
RB1029	1-234-369-21	s	RES, NETWORK 10 (1005X4)
RB1030	1-234-369-21	s	RES, NETWORK 10 (1005X4)
RB1031	1-234-369-21	s	RES, NETWORK 10 (1005X4)
RB1032	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1033	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1034	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1035	1-234-369-21	s	RES, NETWORK 10 (1005X4)
RB1036	1-234-369-21	s	RES, NETWORK 10 (1005X4)
RB1037	1-234-369-21	s	RES, NETWORK 10 (1005X4)
RB1038	1-234-369-21	s	RES, NETWORK 10 (1005X4)
RB1045	1-234-382-21	s	RES, NETWORK 220K (1005X4)
RB1046	1-234-382-21	s	RES, NETWORK 220K (1005X4)
RB1047	1-234-382-21	s	RES, NETWORK 220K (1005X4)
RB1048	1-234-382-21	s	RES, NETWORK 220K (1005X4)

(DCP-49A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB1100	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB1101	1-234-382-21	s	RES, NETWORK 220K (1005X4)
RB1104	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1105	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1106	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1107	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1108	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1109	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1110	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1111	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1112	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1113	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1115	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1116	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1117	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1118	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1119	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1120	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1300	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1301	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1302	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1309	1-234-382-21	s	RES, NETWORK 220K (1005X4)
RB1313	1-234-382-21	s	RES, NETWORK 220K (1005X4)
RB1328	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1329	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1330	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1331	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1332	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1333	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1334	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1335	1-234-377-21	s	RES, NETWORK 4.7K (1005X4)
RB1336	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1337	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1338	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1339	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1340	1-234-377-21	s	RES, NETWORK 4.7K (1005X4)
RB1341	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1500	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1501	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1502	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1503	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1504	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1505	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1506	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1507	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1508	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1509	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1510	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1512	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1513	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1514	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1515	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1516	1-234-371-21	s	RES, NETWORK 47 (1005X4)
TP400	1-535-877-22	s	CHIP, CHECKER
TP401	1-535-877-22	s	CHIP, CHECKER
TP1000	1-535-877-22	s	CHIP, CHECKER
TP1001	1-535-877-22	s	CHIP, CHECKER
TP1300	1-535-877-22	s	CHIP, CHECKER

(DCP-49A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
TP1500	1-535-877-22	s	CHIP, CHECKER
TP1501	1-535-877-22	s	CHIP, CHECKER
VDR1	1-802-245-11	s	ESD SUPPRESSOR
VDR2	1-802-245-11	s	ESD SUPPRESSOR
VDR3	1-802-245-11	s	ESD SUPPRESSOR
VDR4	1-802-245-11	s	ESD SUPPRESSOR
X400	1-795-831-12	s	OSCILLATOR, CRYSTAL (VCXO)3.3V

DET-45 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1540-127-A	s	MOUNTED CIRCUIT BOARD, DET-45
CN1	1-818-210-21	s	PIN, CONNECTOR 2P
S1	1-786-179-41	s	SWITCH, PUSH (1KEY)

DET-47 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
C1	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C4	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C5	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
CN1	1-817-054-21	s	PIN, CONNECTOR 6P
D1	6-501-381-01	s	DIODE CL-201IR-X-TSL-BC
Q1	6-550-988-01	s	TRANSISTOR CPT-184S-C-TS-BCD
Q2	6-550-988-01	s	TRANSISTOR CPT-184S-C-TS-BCD
Q3	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q4	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q5	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q6	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q7	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
R1	1-208-927-81	s	RES, CHIP 47K (1005)
R2	1-208-871-81	s	RES, CHIP 220 (1005)
R3	1-208-911-81	s	RES, CHIP 10K (1005)
R4	1-208-887-81	s	RES, CHIP 1.0K (1005)
R5	1-208-919-81	s	RES, CHIP 22K (1005)
R6	1-208-927-81	s	RES, CHIP 47K (1005)
R7	1-208-911-81	s	RES, CHIP 10K (1005)
R8	1-208-887-81	s	RES, CHIP 1.0K (1005)
R9	1-208-919-81	s	RES, CHIP 22K (1005)
R10	1-208-927-81	s	RES, CHIP 47K (1005)
R11	1-208-919-81	s	RES, CHIP 22K (1005)
R12	1-208-919-81	s	RES, CHIP 22K (1005)
R13	1-208-871-81	s	RES, CHIP 220 (1005)
R14	1-208-871-81	s	RES, CHIP 220 (1005)

DR-606 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
C100	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C101	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C102	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C103	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C104	1-114-288-11	s	CAP, TANTALUM ELECT 22MF
C105	1-100-670-91	s	CAP, CERAMIC 4.7MF C (2012)
C106	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C107	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C108	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C109	1-128-623-91	s	CAP, CERAMIC 220PF B (0603)
C110	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C111	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C112	1-100-672-91	s	CAP, CERAMIC 10MF C (3216)
C113	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C114	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C115	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C116	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C117	1-114-166-91	s	CAP, CERAMIC 0.01MF B (0603)
C118	1-114-289-11	s	CAP, TANTALUM ELECT 33MF
C119	1-114-288-11	s	CAP, TANTALUM ELECT 22MF
C120	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C121	1-114-289-11	s	CAP, TANTALUM ELECT 33MF
C122	1-114-289-11	s	CAP, TANTALUM ELECT 33MF
C123	1-114-289-11	s	CAP, TANTALUM ELECT 33MF
C124	1-114-288-11	s	CAP, TANTALUM ELECT 22MF
C200	1-128-617-91	s	CAP, CERAMIC 100PF CH (0603)
C201	1-128-617-91	s	CAP, CERAMIC 100PF CH (0603)
C202	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C203	1-100-965-91	s	CAP, CERAMIC 0.047MF B (0603
C204	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C205	1-114-289-11	s	CAP, TANTALUM ELECT 33MF
C206	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C207	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C208	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C209	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C210	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C211	1-114-166-91	s	CAP, CERAMIC 0.01MF B (0603)
C212	1-128-630-91	s	CAP, CERAMIC 4700PF B (0603)
C213	1-100-881-91	s	CAP, CERAMIC 47MF C (3216)
C214	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C215	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C216	1-128-629-91	s	CAP, CERAMIC 3300PF B (0603)
C217	1-100-881-91	s	CAP, CERAMIC 47MF C (3216)
C218	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C219	1-100-881-91	s	CAP, CERAMIC 47MF C (3216)
C220	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C221	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C222	1-100-881-91	s	CAP, CERAMIC 47MF C (3216)
C223	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C224	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C225	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C226	1-128-627-91	s	CAP, CERAMIC 1000PF B (0603)
C227	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C228	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C229	1-128-617-91	s	CAP, CERAMIC 100PF CH (0603)
C230	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C231	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C232	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C233	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)

(DR-606 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C234	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C235	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C236	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C237	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C238	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C239	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C240	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C241	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C242	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C243	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C244	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C247	1-112-198-91	s	CAP, CERAMIC 39PF CH (0603)
C300	1-114-289-11	s	CAP, TANTALUM ELECT 33MF
C301	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C302	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C303	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C304	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C305	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C306	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C307	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C308	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C309	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C310	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C311	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C312	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C313	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C314	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C315	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C316	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C317	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C318	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C319	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C320	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C321	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C322	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C323	1-128-617-91	s	CAP, CERAMIC 100PF CH (0603)
C324	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C325	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C326	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C327	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C328	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C329	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C330	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C400	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C401	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C402	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C403	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C404	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C407	1-128-627-91	s	CAP, CERAMIC 1000PF B (0603)
C408	1-128-627-91	s	CAP, CERAMIC 1000PF B (0603)
C409	1-128-628-91	s	CAP, CERAMIC 2200PF B (0603)
C410	1-128-628-91	s	CAP, CERAMIC 2200PF B (0603)
C411	1-114-289-11	s	CAP, TANTALUM ELECT 33MF
C412	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C413	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C414	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C415	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C416	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C417	1-128-617-91	s	CAP, CERAMIC 100PF CH (0603)

(DR-606 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C418	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C419	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C420	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C421	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C422	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C423	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C424	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C425	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C426	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C427	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C428	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C429	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C430	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C431	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C432	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C433	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C434	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C435	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C436	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C437	1-128-628-91	s	CAP, CERAMIC 2200PF B (0603)
C438	1-128-628-91	s	CAP, CERAMIC 2200PF B (0603)
C439	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C440	1-128-628-91	s	CAP, CERAMIC 2200PF B (0603)
C441	1-128-628-91	s	CAP, CERAMIC 2200PF B (0603)
C442	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C443	1-100-965-91	s	CAP, CERAMIC 0.047MF B (0603
C444	1-100-965-91	s	CAP, CERAMIC 0.047MF B (0603
C445	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C446	1-112-560-91	s	CAP, CERAMIC 0.022MF B (0603)
C447	1-112-560-91	s	CAP, CERAMIC 0.022MF B (0603)
C448	1-112-560-91	s	CAP, CERAMIC 0.022MF B (0603)
C449	1-112-560-91	s	CAP, CERAMIC 0.022MF B (0603)
C450	1-112-560-91	s	CAP, CERAMIC 0.022MF B (0603)
C500	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C501	1-128-625-91	s	CAP, CERAMIC 470PF B (0603)
C502	1-114-166-91	s	CAP, CERAMIC 0.01MF B (0603)
C503	1-114-166-91	s	CAP, CERAMIC 0.01MF B (0603)
C504	1-114-166-91	s	CAP, CERAMIC 0.01MF B (0603)
C505	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C506	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C507	1-128-626-91	s	CAP, CERAMIC 680PF B (0603)
C508	1-128-623-91	s	CAP, CERAMIC 220PF B (0603)
C509	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C510	1-128-617-91	s	CAP, CERAMIC 100PF CH (0603)
C511	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C512	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C513	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C514	1-114-166-91	s	CAP, CERAMIC 0.01MF B (0603)
C515	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C516	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C517	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C524	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C525	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C526	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C527	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C528	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C529	1-127-715-91	s	CAP,CHIP CERAMIC 0.22MF B 1608
C530	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C531	1-114-166-91	s	CAP, CERAMIC 0.01MF B (0603)

(DR-606 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C532	1-114-166-91	s	CAP, CERAMIC 0.01MF B (0603)
C533	1-114-166-91	s	CAP, CERAMIC 0.01MF B (0603)
C534	1-114-166-91	s	CAP, CERAMIC 0.01MF B (0603)
C535	1-114-166-91	s	CAP, CERAMIC 0.01MF B (0603)
C536	1-114-166-91	s	CAP, CERAMIC 0.01MF B (0603)
C537	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C538	1-100-672-91	s	CAP, CERAMIC 10MF C (3216)
C539	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C540	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C541	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C542	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C543	1-114-166-91	s	CAP, CERAMIC 0.01MF B (0603)
C544	1-114-166-91	s	CAP, CERAMIC 0.01MF B (0603)
C545	1-114-166-91	s	CAP, CERAMIC 0.01MF B (0603)
C546	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C547	1-112-560-91	s	CAP, CERAMIC 0.022MF B (0603)
C548	1-112-560-91	s	CAP, CERAMIC 0.022MF B (0603)
C549	1-112-560-91	s	CAP, CERAMIC 0.022MF B (0603)
C550	1-112-560-91	s	CAP, CERAMIC 0.022MF B (0603)
C551	1-128-617-91	s	CAP, CERAMIC 100PF CH (0603)
C552	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C553	1-128-617-91	s	CAP, CERAMIC 100PF CH (0603)
C554	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C555	1-112-560-91	s	CAP, CERAMIC 0.022MF B (0603)
C556	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C557	1-100-672-91	s	CAP, CERAMIC 10MF C (3216)
C558	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C559	1-114-166-91	s	CAP, CERAMIC 0.01MF B (0603)
C560	1-114-166-91	s	CAP, CERAMIC 0.01MF B (0603)
C561	1-128-627-91	s	CAP, CERAMIC 1000PF B (0603)
C562	1-128-617-91	s	CAP, CERAMIC 100PF CH (0603)
C563	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C564	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C565	1-128-611-91	s	CAP, CERAMIC 33PF CH (0603)
C566	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C567	1-128-627-91	s	CAP, CERAMIC 1000PF B (0603)
C568	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C569	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C570	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C571	1-128-611-91	s	CAP, CERAMIC 33PF CH (0603)
C572	1-100-672-91	s	CAP, CERAMIC 10MF C (3216)
C573	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C574	1-112-197-91	s	CAP, CERAMIC 10PF CH (0603)
C575	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C576	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C577	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C578	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C579	1-127-997-91	s	CAP, CERAMIC 7PF CH (0603)
C580	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C581	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C582	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C583	1-114-166-91	s	CAP, CERAMIC 0.01MF B (0603)
C584	1-128-617-91	s	CAP, CERAMIC 100PF CH (0603)
C585	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C600	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C601	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C602	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C603	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C604	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)

(DR-606 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C605	1-127-995-91	s	CAP, CERAMIC 5PF CH (0603)
C606	1-127-995-91	s	CAP, CERAMIC 5PF CH (0603)
C607	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C608	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C609	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C610	1-114-166-91	s	CAP, CERAMIC 0.01MF B (0603)
C611	1-114-166-91	s	CAP, CERAMIC 0.01MF B (0603)
C612	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C613	1-114-166-91	s	CAP, CERAMIC 0.01MF B (0603)
C614	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C615	1-114-166-91	s	CAP, CERAMIC 0.01MF B (0603)
C616	1-114-166-91	s	CAP, CERAMIC 0.01MF B (0603)
C617	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C618	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C619	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C620	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C621	1-112-560-91	s	CAP, CERAMIC 0.022MF B (0603)
C622	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C623	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C624	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C625	1-114-166-91	s	CAP, CERAMIC 0.01MF B (0603)
C626	1-128-623-91	s	CAP, CERAMIC 220PF B (0603)
C627	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C628	1-128-625-91	s	CAP, CERAMIC 470PF B (0603)
C629	1-128-625-91	s	CAP, CERAMIC 470PF B (0603)
C630	1-128-623-91	s	CAP, CERAMIC 220PF B (0603)
C631	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C632	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C633	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C634	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C635	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C636	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C637	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C638	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C639	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C640	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C700	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C701	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C702	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C703	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C704	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C705	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C706	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C707	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C708	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C709	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C710	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C711	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C712	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C713	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C714	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C715	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C716	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C717	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C718	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C719	1-100-670-91	s	CAP, CERAMIC 4.7MF C (2012)
C720	1-100-670-91	s	CAP, CERAMIC 4.7MF C (2012)
C721	1-114-289-11	s	CAP, TANTALUM ELECT 33MF
C722	1-100-670-91	s	CAP, CERAMIC 4.7MF C (2012)

(DR-606 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C723	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C724	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C727	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C729	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C730	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C731	1-112-560-91	s	CAP, CERAMIC 0.022MF B (0603)
C800	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C900	1-128-611-91	s	CAP, CERAMIC 33PF CH (0603)
C901	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
CN100	1-815-889-21	s	PIN, CONNECTOR (PC BOARD) 14P
CN102	1-817-920-22	s	CONNECTOR, FPC (ZIF) 80P
CN200	1-764-243-31	o	CONNECTOR (COAXIAL)
CN857	1-817-920-22	s	CONNECTOR, FPC (ZIF) 80P
CN858	1-818-621-21	s	CONNECTOR, FPC (ZIF) 30P
D100	8-719-051-04	s	DIODE EC10QS04-TE12L5
D502	8-719-069-28	s	DIODE 1SS400TE-61
D503	8-719-069-28	s	DIODE 1SS400TE-61
D504	8-719-421-68	s	DIODE MA132WK-TX
D505	6-501-361-01	s	DIODE RB051LA-40TR
D900	6-502-146-01	o	DI MA2S7280G8S0
E1	1-535-757-21	s	CHIP, CHECKER
IC100	6-706-488-01	s	IC TC7SH14FU(T5RSOYJF)
IC101	8-759-598-43	s	IC TC7WH04FK(TE85R)
IC102	6-702-762-01	s	IC TC75S58FE(TE85R)
IC103	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC104	6-703-928-01	s	IC MAX1896EUT#TG16
IC109	8-759-655-22	s	IC TC7WH34FK(TE85R)
IC200	8-753-221-60	s	IC CXA2686R-TL
IC201	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC301	6-702-058-01	s	IC MD56V62160E-10LAZ03B
IC302	6-700-831-01	s	IC TC7WZ74FK(TE85R)
IC400	6-707-372-01	s	IC TMC320BRD01PGE
IC404	8-759-523-01	s	IC TC74HC4052AFT(EL)
IC405	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC406	6-710-792-01	s	IC NJU7777F4-33(TE2)
IC407	6-706-476-01	s	IC TC7SET04FU(T5RSOJF)
IC408	6-706-476-01	s	IC TC7SET04FU(T5RSOJF)
IC409	6-706-476-01	s	IC TC7SET04FU(T5RSOJF)
IC411	6-706-488-01	s	IC TC7SH14FU(T5RSOYJF)
IC412	6-706-488-01	s	IC TC7SH14FU(T5RSOYJF)
IC413	6-706-489-01	s	IC TC7SH32FU(T5RSOYJF)
IC414	6-706-484-01	s	IC TC7SH04FU(T5RSOYJF)
IC500	6-705-074-01	s	IC BD6671FM
IC501	8-759-668-90	s	IC NJW4301M-TE2
IC502	6-700-196-01	s	IC AN8499SH-E1V
IC503	6-700-196-01	s	IC AN8499SH-E1V
IC506	6-706-488-01	s	IC TC7SH14FU(T5RSOYJF)
IC507	6-706-488-01	s	IC TC7SH14FU(T5RSOYJF)
IC508	6-706-478-01	s	IC TC7SET08FU(T5RSOJF)
IC509	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC512	6-706-484-01	s	IC TC7SH04FU(T5RSOYJF)
IC513	6-706-489-01	s	IC TC7SH32FU(T5RSOYJF)
IC516	6-710-498-01	s	IC TPS62110RSARG4
IC517	6-703-285-01	s	IC S-812C33AUA-C2NT2G
IC518	6-704-512-01	s	IC TPS62050DGSR
IC519	6-709-322-01	s	IC TC7WH123FK(TE85R)
IC520	6-706-481-01	s	IC TC7SET32FU(T5RSOJF)

(DR-606 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC521	6-706-476-01	s	IC TC7SET04FU(T5RSOJF)
IC522	6-706-478-01	s	IC TC7SET08FU(T5RSOJF)
IC523	6-706-478-01	s	IC TC7SET08FU(T5RSOJF)
IC524	6-706-489-01	s	IC TC7SH32FU(T5RSOYJF)
IC525	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC526	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC527	6-706-474-01	s	IC TC7SET00FU(T5RSOJF)
IC603	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC608	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC609	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC610	8-759-656-54	s	IC TC7WH14FK(TE85R)
IC611	6-706-488-01	s	IC TC7SH14FU(T5RSOYJF)
IC612	6-710-830-01	s	IC RNA50C27AUSEL-E
IC613	6-704-567-01	s	IC R3112N451A-TR-FA
IC702	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC703	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC704	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC705	6-706-488-01	s	IC TC7SH14FU(T5RSOYJF)
IC706	6-710-861-01	s	IC TC7SET34FU(T5RSONF
IC800	6-704-099-01	s	IC TC7WZ08FK(TE85R)
IC900	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC901	6-700-217-01	s	IC TC7SZ14FU(TE85R)
L100	1-481-210-21	s	INDUCTOR (SMALL TYPE) 4.7UH
L101	1-481-210-21	s	INDUCTOR (SMALL TYPE) 4.7UH
L102	1-400-790-21	s	INDUCTOR, CHIP 4.7UH (2518)
L200	1-469-549-21	s	INDUCTOR, CHIP 1.0UH (LB2016)
L201	1-469-549-21	s	INDUCTOR, CHIP 1.0UH (LB2016)
L202	1-469-549-21	s	INDUCTOR, CHIP 1.0UH (LB2016)
L300	1-469-549-21	s	INDUCTOR, CHIP 1.0UH (LB2016)
L301	1-469-549-21	s	INDUCTOR, CHIP 1.0UH (LB2016)
L400	1-469-549-21	s	INDUCTOR, CHIP 1.0UH (LB2016)
L401	1-469-549-21	s	INDUCTOR, CHIP 1.0UH (LB2016)
L500	1-400-791-21	s	INDUCTOR, CHIP 10UH (2518)
L501	1-469-549-21	s	INDUCTOR, CHIP 1.0UH (LB2016)
L502	1-400-791-21	s	INDUCTOR, CHIP 10UH (2518)
L600	1-469-549-21	s	INDUCTOR, CHIP 1.0UH (LB2016)
L601	1-469-549-21	s	INDUCTOR, CHIP 1.0UH (LB2016)
L700	1-469-549-21	s	INDUCTOR, CHIP 1.0UH (LB2016)
L701	1-469-549-21	s	INDUCTOR, CHIP 1.0UH (LB2016)
L702	1-400-789-21	s	INDUCTOR, CHIP 2.2UH (2518)
L703	1-469-551-21	s	INDUCTOR, CHIP 2.2UH (LB2016)
OC1	1-694-974-21	s	CONTACT TERMINAL
Q101	6-551-644-01	s	TRANSISTOR DTA123JMFS6T2L
Q102	6-551-644-01	s	TRANSISTOR DTA123JMFS6T2L
Q103	6-551-644-01	s	TRANSISTOR DTA123JMFS6T2L
Q104	6-551-644-01	s	TRANSISTOR DTA123JMFS6T2L
Q105	6-551-644-01	s	TRANSISTOR DTA123JMFS6T2L
Q106	6-551-644-01	s	TRANSISTOR DTA123JMFS6T2L
Q500	6-550-384-01	s	TRANSISTOR DTC123JMFS6T2L
Q501	6-550-384-01	s	TRANSISTOR DTC123JMFS6T2L
Q502	6-551-644-01	s	TRANSISTOR DTA123JMFS6T2L
Q503	6-550-384-01	s	TRANSISTOR DTC123JMFS6T2L
Q504	6-550-384-01	s	TRANSISTOR DTC123JMFS6T2L
Q505	6-551-644-01	s	TRANSISTOR DTA123JMFS6T2L
Q506	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q507	6-550-384-01	s	TRANSISTOR DTC123JMFS6T2L
Q509	6-551-265-01	s	TRANSISTOR SI2307BDS-T1

(DR-606 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
Q510	6-551-265-01	s	TRANSISTOR SI2307BDS-T1
Q511	6-550-384-01	s	TRANSISTOR DTC123JMFS6T2L
Q600	6-551-671-01	s	TRANSISTOR HAT1069C-EL-E
Q700	6-550-384-01	s	TRANSISTOR DTC123JMFS6T2L
Q701	6-551-265-01	s	TRANSISTOR SI2307BDS-T1
Q800	8-729-144-81	s	TRANSISTOR 2SC4176T1B33B34B35
Q801	8-729-144-81	s	TRANSISTOR 2SC4176T1B33B34B35
Q802	8-729-144-81	s	TRANSISTOR 2SC4176T1B33B34B35
Q803	8-729-144-81	s	TRANSISTOR 2SC4176T1B33B34B35
R100	1-240-676-91	s	RES, CHIP 22 (0603)
R101	1-240-676-91	s	RES, CHIP 22 (0603)
R102	1-240-676-91	s	RES, CHIP 22 (0603)
R103	1-240-707-91	s	RES, CHIP 10K (0603)
R104	1-240-808-91	s	RES, CHIP 10K (0603)
R105	1-240-794-91	s	RES, CHIP 2.7K (0603)
R106	1-240-707-91	s	RES, CHIP 10K (0603)
R107	1-240-707-91	s	RES, CHIP 10K (0603)
R108	1-240-808-91	s	RES, CHIP 10K (0603)
R111	1-240-810-91	s	RES, CHIP 12K (0603)
R112	1-240-827-91	s	RES, CHIP 75K (0603)
R113	1-240-718-91	s	RES, CHIP 100K (0603)
R114	1-240-718-91	s	RES, CHIP 100K (0603)
R116	1-240-729-91	s	RES, CHIP 1M (0603)
R117	1-240-683-91	s	RES, CHIP 100 (0603)
R118	1-240-718-91	s	RES, CHIP 100K (0603)
R119	1-240-707-91	s	RES, CHIP 10K (0603)
R120	1-240-707-91	s	RES, CHIP 10K (0603)
R121	1-240-683-91	s	RES, CHIP 100 (0603)
R122	1-240-711-91	s	RES, CHIP 22K (0603)
R123	1-240-718-91	s	RES, CHIP 100K (0603)
R124	1-240-718-91	s	RES, CHIP 100K (0603)
R200	1-240-707-91	s	RES, CHIP 10K (0603)
R201	1-240-707-91	s	RES, CHIP 10K (0603)
R202	1-240-711-91	s	RES, CHIP 22K (0603)
R203	1-240-711-91	s	RES, CHIP 22K (0603)
R204	1-240-683-91	s	RES, CHIP 100 (0603)
R205	1-240-695-91	s	RES, CHIP 1K (0603)
R206	1-240-695-91	s	RES, CHIP 1K (0603)
R207	1-240-695-91	s	RES, CHIP 1K (0603)
R208	1-240-695-91	s	RES, CHIP 1K (0603)
R209	1-240-683-91	s	RES, CHIP 100 (0603)
R210	1-240-683-91	s	RES, CHIP 100 (0603)
R211	1-240-676-91	s	RES, CHIP 22 (0603)
R212	1-240-676-91	s	RES, CHIP 22 (0603)
R300	1-240-683-91	s	RES, CHIP 100 (0603)
R301	1-240-693-91	s	RES, CHIP 680 (0603)
R302	1-240-773-91	s	RES, CHIP 360 (0603)
R303	1-240-683-91	s	RES, CHIP 100 (0603)
R304	1-240-707-91	s	RES, CHIP 10K (0603)
R305	1-240-762-91	s	RES, CHIP 120 (0603)
R306	1-240-683-91	s	RES, CHIP 100 (0603)
R307	1-240-707-91	s	RES, CHIP 10K (0603)
R308	1-240-762-91	s	RES, CHIP 120 (0603)
R309	1-240-683-91	s	RES, CHIP 100 (0603)
R310	1-240-718-91	s	RES, CHIP 100K (0603)
R311	1-240-718-91	s	RES, CHIP 100K (0603)
R312	1-240-676-91	s	RES, CHIP 22 (0603)
R313	1-240-758-91	s	RES, CHIP 82 (0603)
R314	1-240-758-91	s	RES, CHIP 82 (0603)

(DR-606 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R315	1-694-535-91	s	CONDCTOR, CHIP (0603)
R316	1-240-758-91	s	RES, CHIP 82 (0603)
R317	1-240-758-91	s	RES, CHIP 82 (0603)
R318	1-240-758-91	s	RES, CHIP 82 (0603)
R319	1-240-758-91	s	RES, CHIP 82 (0603)
R320	1-240-758-91	s	RES, CHIP 82 (0603)
R321	1-240-758-91	s	RES, CHIP 82 (0603)
R322	1-240-758-91	s	RES, CHIP 82 (0603)
R323	1-240-758-91	s	RES, CHIP 82 (0603)
R324	1-694-535-91	s	CONDCTOR, CHIP (0603)
R325	1-694-535-91	s	CONDCTOR, CHIP (0603)
R326	1-240-676-91	s	RES, CHIP 22 (0603)
R327	1-240-676-91	s	RES, CHIP 22 (0603)
R328	1-240-676-91	s	RES, CHIP 22 (0603)
R329	1-240-678-91	s	RES, CHIP 33 (0603)
R330	1-240-678-91	s	RES, CHIP 33 (0603)
R331	1-240-678-91	s	RES, CHIP 33 (0603)
R332	1-240-678-91	s	RES, CHIP 33 (0603)
R333	1-240-678-91	s	RES, CHIP 33 (0603)
R334	1-240-678-91	s	RES, CHIP 33 (0603)
R335	1-240-678-91	s	RES, CHIP 33 (0603)
R336	1-240-678-91	s	RES, CHIP 33 (0603)
R337	1-240-678-91	s	RES, CHIP 33 (0603)
R338	1-240-678-91	s	RES, CHIP 33 (0603)
R339	1-240-678-91	s	RES, CHIP 33 (0603)
R340	1-240-678-91	s	RES, CHIP 33 (0603)
R341	1-240-678-91	s	RES, CHIP 33 (0603)
R342	1-240-678-91	s	RES, CHIP 33 (0603)
R343	1-240-678-91	s	RES, CHIP 33 (0603)
R344	1-240-678-91	s	RES, CHIP 33 (0603)
R345	1-240-672-91	s	RES, CHIP 10 (0603)
R400	1-246-191-91	s	RES, CHIP 220K (0603)
R401	1-240-826-91	s	RES, CHIP 68K (0603)
R402	1-240-796-91	s	RES, CHIP 3.3K (0603)
R403	1-246-191-91	s	RES, CHIP 220K (0603)
R404	1-240-826-91	s	RES, CHIP 68K (0603)
R405	1-240-796-91	s	RES, CHIP 3.3K (0603)
R406	1-240-830-91	s	RES, CHIP 100K (0603)
R407	1-240-830-91	s	RES, CHIP 100K (0603)
R408	1-240-711-91	s	RES, CHIP 22K (0603)
R409	1-240-701-91	s	RES, CHIP 3.3K (0603)
R410	1-240-701-91	s	RES, CHIP 3.3K (0603)
R411	1-240-830-91	s	RES, CHIP 100K (0603)
R412	1-240-830-91	s	RES, CHIP 100K (0603)
R413	1-240-830-91	s	RES, CHIP 100K (0603)
R414	1-240-830-91	s	RES, CHIP 100K (0603)
R415	1-240-703-91	s	RES, CHIP 4.7K (0603)
R416	1-240-703-91	s	RES, CHIP 4.7K (0603)
R417	1-240-676-91	s	RES, CHIP 22 (0603)
R418	1-240-676-91	s	RES, CHIP 22 (0603)
R419	1-240-676-91	s	RES, CHIP 22 (0603)
R420	1-240-676-91	s	RES, CHIP 22 (0603)
R421	1-240-676-91	s	RES, CHIP 22 (0603)
R422	1-240-676-91	s	RES, CHIP 22 (0603)
R423	1-240-676-91	s	RES, CHIP 22 (0603)
R424	1-240-676-91	s	RES, CHIP 22 (0603)
R425	1-240-683-91	s	RES, CHIP 100 (0603)
R426	1-240-703-91	s	RES, CHIP 4.7K (0603)
R427	1-240-722-91	s	RES, CHIP 220K (0603)

(DR-606 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R428	1-240-689-91	s	RES, CHIP 330 (0603)
R429	1-240-689-91	s	RES, CHIP 330 (0603)
R430	1-240-695-91	s	RES, CHIP 1K (0603)
R431	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R432	1-240-689-91	s	RES, CHIP 330 (0603)
R433	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R434	1-240-689-91	s	RES, CHIP 330 (0603)
R435	1-240-718-91	s	RES, CHIP 100K (0603)
R436	1-240-695-91	s	RES, CHIP 1K (0603)
R437	1-240-718-91	s	RES, CHIP 100K (0603)
R438	1-240-695-91	s	RES, CHIP 1K (0603)
R439	1-240-695-91	s	RES, CHIP 1K (0603)
R440	1-240-695-91	s	RES, CHIP 1K (0603)
R441	1-240-695-91	s	RES, CHIP 1K (0603)
R442	1-240-707-91	s	RES, CHIP 10K (0603)
R443	1-240-822-91	s	RES, CHIP 47K (0603)
R444	1-240-804-91	s	RES, CHIP 6.8K (0603)
R500	1-240-714-91	s	RES, CHIP 47K (0603)
R501	1-240-718-91	s	RES, CHIP 100K (0603)
R502	1-240-718-91	s	RES, CHIP 100K (0603)
R503	1-240-699-91	s	RES, CHIP 2.2K (0603)
R504	1-240-808-91	s	RES, CHIP 10K (0603)
R505	1-240-808-91	s	RES, CHIP 10K (0603)
R506	1-240-699-91	s	RES, CHIP 2.2K (0603)
R507	1-211-737-91	s	RES,SQUARE TYPE CHIP 0.47 3225
R508	1-211-737-91	s	RES,SQUARE TYPE CHIP 0.47 3225
R520	1-240-729-91	s	RES, CHIP 1M (0603)
R521	1-240-683-91	s	RES, CHIP 100 (0603)
R522	1-246-191-91	s	RES, CHIP 220K (0603)
R523	1-246-191-91	s	RES, CHIP 220K (0603)
R524	1-246-191-91	s	RES, CHIP 220K (0603)
R525	1-246-191-91	s	RES, CHIP 220K (0603)
R526	1-240-816-91	s	RES, CHIP 22K (0603)
R527	1-240-816-91	s	RES, CHIP 22K (0603)
R528	1-240-816-91	s	RES, CHIP 22K (0603)
R529	1-240-816-91	s	RES, CHIP 22K (0603)
R530	1-211-737-91	s	RES,SQUARE TYPE CHIP 0.47 3225
R531	1-211-969-91	s	RES, CHIP 10 (1608)
R532	1-211-737-91	s	RES,SQUARE TYPE CHIP 0.47 3225
R533	1-211-969-91	s	RES, CHIP 10 (1608)
R534	1-211-969-91	s	RES, CHIP 10 (1608)
R535	1-240-808-91	s	RES, CHIP 10K (0603)
R536	1-240-711-91	s	RES, CHIP 22K (0603)
R537	1-240-808-91	s	RES, CHIP 10K (0603)
R538	1-240-808-91	s	RES, CHIP 10K (0603)
R539	1-240-808-91	s	RES, CHIP 10K (0603)
R540	1-240-808-91	s	RES, CHIP 10K (0603)
R541	1-218-233-91	s	RES, SQUARE TYPE CHIP 47(4532)
R542	1-240-808-91	s	RES, CHIP 10K (0603)
R543	1-218-233-91	s	RES, SQUARE TYPE CHIP 47(4532)
R544	1-240-808-91	s	RES, CHIP 10K (0603)
R545	1-240-808-91	s	RES, CHIP 10K (0603)
R546	1-220-882-81	s	RES, CHIP 33 (1005)
R547	1-220-882-81	s	RES, CHIP 33 (1005)
R548	1-240-707-91	s	RES, CHIP 10K (0603)
R549	1-240-707-91	s	RES, CHIP 10K (0603)
R550	1-240-784-91	s	RES, CHIP 1K (0603)
R551	1-240-784-91	s	RES, CHIP 1K (0603)
R552	1-240-784-91	s	RES, CHIP 1K (0603)

(DR-606 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R553	1-240-820-91	s	RES, CHIP 33K (0603)
R554	1-240-820-91	s	RES, CHIP 33K (0603)
R555	1-240-830-91	s	RES, CHIP 100K (0603)
R556	1-240-718-91	s	RES, CHIP 100K (0603)
R557	1-211-737-91	s	RES,SQUARE TYPE CHIP 0.47 3225
R558	1-245-581-91	s	RES, CHIP 1M (0603)
R559	1-245-581-91	s	RES, CHIP 1M (0603)
R560	1-240-816-91	s	RES, CHIP 22K (0603)
R561	1-240-695-91	s	RES, CHIP 1K (0603)
R562	1-240-695-91	s	RES, CHIP 1K (0603)
R563	1-240-695-91	s	RES, CHIP 1K (0603)
R564	1-220-882-81	s	RES, CHIP 33 (1005)
R565	1-220-882-81	s	RES, CHIP 33 (1005)
R566	1-240-695-91	s	RES, CHIP 1K (0603)
R567	1-240-695-91	s	RES, CHIP 1K (0603)
R568	1-240-808-91	s	RES, CHIP 10K (0603)
R569	1-240-820-91	s	RES, CHIP 33K (0603)
R570	1-240-784-91	s	RES, CHIP 1K (0603)
R571	1-240-784-91	s	RES, CHIP 1K (0603)
R572	1-240-695-91	s	RES, CHIP 1K (0603)
R573	1-240-683-91	s	RES, CHIP 100 (0603)
R574	1-240-718-91	s	RES, CHIP 100K (0603)
R575	1-240-683-91	s	RES, CHIP 100 (0603)
R576	1-240-722-91	s	RES, CHIP 220K (0603)
R577	1-240-722-91	s	RES, CHIP 220K (0603)
R578	1-240-718-91	s	RES, CHIP 100K (0603)
R579	1-240-726-91	s	RES, CHIP 470K (0603)
R580	1-245-671-91	s	RES,CHIP 39K
R581	1-240-720-91	s	RES, CHIP 150K (0603)
R582	1-240-729-91	s	RES, CHIP 1M (0603)
R583	1-240-714-91	s	RES, CHIP 47K (0603)
R584	1-245-671-91	s	RES,CHIP 39K
R585	1-240-784-91	s	RES, CHIP 1K (0603)
R586	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R587	1-211-737-91	s	RES,SQUARE TYPE CHIP 0.47 3225
R588	1-240-830-91	s	RES, CHIP 100K (0603)
R589	1-240-830-91	s	RES, CHIP 100K (0603)
R590	1-240-816-91	s	RES, CHIP 22K (0603)
R591	1-240-816-91	s	RES, CHIP 22K (0603)
R592	1-240-804-91	s	RES, CHIP 6.8K (0603)
R593	1-240-804-91	s	RES, CHIP 6.8K (0603)
R594	1-240-830-91	s	RES, CHIP 100K (0603)
R595	1-240-830-91	s	RES, CHIP 100K (0603)
R596	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R600	1-240-701-91	s	RES, CHIP 3.3K (0603)
R601	1-240-695-91	s	RES, CHIP 1K (0603)
R602	1-240-713-91	s	RES, CHIP 33K (0603)
R603	1-240-695-91	s	RES, CHIP 1K (0603)
R604	1-240-695-91	s	RES, CHIP 1K (0603)
R605	1-240-707-91	s	RES, CHIP 10K (0603)
R606	1-240-707-91	s	RES, CHIP 10K (0603)
R607	1-240-722-91	s	RES, CHIP 220K (0603)
R608	1-240-722-91	s	RES, CHIP 220K (0603)
R609	1-240-695-91	s	RES, CHIP 1K (0603)
R610	1-240-695-91	s	RES, CHIP 1K (0603)
R611	1-240-695-91	s	RES, CHIP 1K (0603)
R612	1-240-695-91	s	RES, CHIP 1K (0603)
R613	1-240-707-91	s	RES, CHIP 10K (0603)
R616	1-240-722-91	s	RES, CHIP 220K (0603)

(DR-606 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R617	1-240-676-91	s	RES, CHIP 22 (0603)
R618	1-240-729-91	s	RES, CHIP 1M (0603)
R619	1-240-722-91	s	RES, CHIP 220K (0603)
R620	1-240-703-91	s	RES, CHIP 4.7K (0603)
R621	1-240-722-91	s	RES, CHIP 220K (0603)
R622	1-240-672-91	s	RES, CHIP 10 (0603)
R623	1-240-701-91	s	RES, CHIP 3.3K (0603)
R624	1-240-705-91	s	RES, CHIP 6.8K (0603)
R625	1-240-718-91	s	RES, CHIP 100K (0603)
R626	1-240-703-91	s	RES, CHIP 4.7K (0603)
R627	1-240-718-91	s	RES, CHIP 100K (0603)
R628	1-240-707-91	s	RES, CHIP 10K (0603)
R629	1-240-683-91	s	RES, CHIP 100 (0603)
R630	1-240-722-91	s	RES, CHIP 220K (0603)
R631	1-240-729-91	s	RES, CHIP 1M (0603)
R632	1-240-683-91	s	RES, CHIP 100 (0603)
R633	1-240-683-91	s	RES, CHIP 100 (0603)
R634	1-240-718-91	s	RES, CHIP 100K (0603)
R635	1-240-718-91	s	RES, CHIP 100K (0603)
R636	1-240-676-91	s	RES, CHIP 22 (0603)
R700	1-240-707-91	s	RES, CHIP 10K (0603)
R701	1-240-707-91	s	RES, CHIP 10K (0603)
R702	1-240-707-91	s	RES, CHIP 10K (0603)
R703	1-240-707-91	s	RES, CHIP 10K (0603)
R704	1-240-707-91	s	RES, CHIP 10K (0603)
R705	1-240-707-91	s	RES, CHIP 10K (0603)
R706	1-240-695-91	s	RES, CHIP 1K (0603)
R707	1-240-707-91	s	RES, CHIP 10K (0603)
R708	1-240-707-91	s	RES, CHIP 10K (0603)
R709	1-240-707-91	s	RES, CHIP 10K (0603)
R710	1-240-720-91	s	RES, CHIP 150K (0603)
R711	1-240-718-91	s	RES, CHIP 100K (0603)
R712	1-240-722-91	s	RES, CHIP 220K (0603)
R713	1-240-718-91	s	RES, CHIP 100K (0603)
R717	1-240-695-91	s	RES, CHIP 1K (0603)
R720	1-240-729-91	s	RES, CHIP 1M (0603)
R721	1-240-714-91	s	RES, CHIP 47K (0603)
R722	1-240-707-91	s	RES, CHIP 10K (0603)
R800	1-694-535-91	s	CONDCTOR, CHIP (0603)
R801	1-694-535-91	s	CONDCTOR, CHIP (0603)
R802	1-694-535-91	s	CONDCTOR, CHIP (0603)
R803	1-694-535-91	s	CONDCTOR, CHIP (0603)
R806	1-240-774-91	s	RES, CHIP 390 (0603)
R807	1-240-778-91	s	RES, CHIP 560 (0603)
R808	1-240-760-91	s	RES, CHIP 100 (0603)
R809	1-240-784-91	s	RES, CHIP 1K (0603)
R810	1-240-774-91	s	RES, CHIP 390 (0603)
R811	1-240-778-91	s	RES, CHIP 560 (0603)
R812	1-240-760-91	s	RES, CHIP 100 (0603)
R813	1-240-784-91	s	RES, CHIP 1K (0603)
R814	1-240-707-91	s	RES, CHIP 10K (0603)
R900	1-240-780-91	s	RES, CHIP 680 (0603)
RB100	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB300	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB301	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB302	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB303	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB304	1-234-381-21	s	RES, NETWORK 100K (1005X4)

(DR-606 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB305	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB306	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB307	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB400	1-234-377-21	s	RES, NETWORK 4.7K (1005X4)
RB401	1-234-377-21	s	RES, NETWORK 4.7K (1005X4)
RB402	1-234-377-21	s	RES, NETWORK 4.7K (1005X4)
RB403	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB404	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB405	1-234-377-21	s	RES, NETWORK 4.7K (1005X4)
RB406	1-234-377-21	s	RES, NETWORK 4.7K (1005X4)
RB407	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB408	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB409	1-234-382-21	s	RES, NETWORK 220K (1005X4)
RB410	1-234-382-21	s	RES, NETWORK 220K (1005X4)
RB411	1-234-382-21	s	RES, NETWORK 220K (1005X4)
RB600	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB601	1-234-382-21	s	RES, NETWORK 220K (1005X4)
RB602	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB603	1-234-382-21	s	RES, NETWORK 220K (1005X4)
RB700	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB701	1-234-382-21	s	RES, NETWORK 220K (1005X4)
RY500	1-755-380-21	s	RELAY
RY501	1-755-380-21	s	RELAY
S600	1-786-675-11	s	TACTILE SWITCH
X300	1-813-902-11	s	OSCILLATOR, CRYSTAL (66MHZ)
X600	1-795-602-11	s	VIBRATOR, CRYSTAL (32.768 KHz)

DR-617 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1540-090-A	s	MOUNTED CIRCUIT BOARD, DR-617
C1	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C6	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C7	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C8	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C9	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C10	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C11	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C12	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C13	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C14	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C15	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C16	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C17	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C18	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C19	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C20	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C21	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C23	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C24	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C25	1-165-875-91	s	CAP, CHIP CERAMIC 10MF B 3216
C26	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C27	1-100-986-21	s	CAP, ELECT 330MF
C28	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C29	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C30	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C31	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C32	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C33	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C34	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C35	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C36	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C37	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C38	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C39	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C40	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C41	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C42	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C43	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C45	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C46	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C47	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C48	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C50	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C51	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C52	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C53	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C56	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C57	1-112-300-91	s	CAP, CERAMIC 4.7MF B (2012)
C58	1-112-300-91	s	CAP, CERAMIC 4.7MF B (2012)
CN1	1-822-448-91	s	CONNECTOR, BOARD TO BOARD 100P
CN2	1-774-391-21	o	CONNECTOR, BOARD TO BOARD 60P
CN3	1-774-391-21	o	CONNECTOR, BOARD TO BOARD 60P
CN4	1-774-391-21	o	CONNECTOR, BOARD TO BOARD 60P

(DR-617 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
D1	8-719-043-70	s	DIODE MA6S121-(TX)
D2	8-719-043-70	s	DIODE MA6S121-(TX)
D3	8-719-043-70	s	DIODE MA6S121-(TX)
D4	8-719-043-70	s	DIODE MA6S121-(TX)
D5	8-719-043-70	s	DIODE MA6S121-(TX)
D6	8-719-043-70	s	DIODE MA6S121-(TX)
E1	1-535-877-22	s	CHIP, CHECKER
E2	1-535-877-22	s	CHIP, CHECKER
FB1	1-469-100-21	s	FERRITE, EMI (SMD) (1608)
FB2	1-469-100-21	s	FERRITE, EMI (SMD) (1608)
FB4	1-469-100-21	s	FERRITE, EMI (SMD) (1608)
FB5	1-469-100-21	s	FERRITE, EMI (SMD) (1608)
FB6	1-469-100-21	s	FERRITE, EMI (SMD) (1608)
FB7	1-469-100-21	s	FERRITE, EMI (SMD) (1608)
FB8	1-469-100-21	s	FERRITE, EMI (SMD) (1608)
FB9	1-469-100-21	s	FERRITE, EMI (SMD) (1608)
FB10	1-469-100-21	s	FERRITE, EMI (SMD) (1608)
FB11	1-469-100-21	s	FERRITE, EMI (SMD) (1608)
FB12	1-469-100-21	s	FERRITE, EMI (SMD) (1608)
FB13	1-469-100-21	s	FERRITE, EMI (SMD) (1608)
FB14	1-469-100-21	s	FERRITE, EMI (SMD) (1608)
FB15	1-469-100-21	s	FERRITE, EMI (SMD) (1608)
FB16	1-469-100-21	s	FERRITE, EMI (SMD) (1608)
FB17	1-469-100-21	s	FERRITE, EMI (SMD) (1608)
FB18	1-469-100-21	s	FERRITE, EMI (SMD) (1608)
FB19	1-469-100-21	s	FERRITE, EMI (SMD) (1608)
FB20	1-469-100-21	s	FERRITE, EMI (SMD) (1608)
FB21	1-469-100-21	s	FERRITE, EMI (SMD) (1608)
FB22	1-469-100-21	s	FERRITE, EMI (SMD) (1608)
FB23	1-469-100-21	s	FERRITE, EMI (SMD) (1608)
FB24	1-469-100-21	s	FERRITE, EMI (SMD) (1608)
FB25	1-469-100-21	s	FERRITE, EMI (SMD) (1608)
FB26	1-469-100-21	s	FERRITE, EMI (SMD) (1608)
FB27	1-469-100-21	s	FERRITE, EMI (SMD) (1608)
FB28	1-469-100-21	s	FERRITE, EMI (SMD) (1608)
FB29	1-469-100-21	s	FERRITE, EMI (SMD) (1608)
FB30	1-469-100-21	s	FERRITE, EMI (SMD) (1608)
FB31	1-469-100-21	s	FERRITE, EMI (SMD) (1608)
FB32	1-469-100-21	s	FERRITE, EMI (SMD) (1608)
FB33	1-469-100-21	s	FERRITE, EMI (SMD) (1608)
IC1	6-711-375-01	s	IC LT1964ES5-BYP#TR
IC2	6-703-181-01	s	IC TC74VCX74FT(EL)
IC3	6-703-181-01	s	IC TC74VCX74FT(EL)
IC4	6-702-319-01	s	IC TC7WZ04FK(TE85R)
IC7	6-700-225-01	s	IC TC74VCX157FT(EL)
IC8	8-759-573-97	s	IC SN74LVC541APWR
IC9	8-759-573-97	s	IC SN74LVC541APWR
IC10	6-708-326-01	s	IC TC74HCT4053AFT(EL)
IC11	6-700-225-01	s	IC TC74VCX157FT(EL)
IC12	6-700-225-01	s	IC TC74VCX157FT(EL)
IC13	6-700-225-01	s	IC TC74VCX157FT(EL)
IC14	6-700-225-01	s	IC TC74VCX157FT(EL)
IC15	6-700-225-01	s	IC TC74VCX157FT(EL)
IC16	6-700-225-01	s	IC TC74VCX157FT(EL)
IC17	6-700-225-01	s	IC TC74VCX157FT(EL)
IC18	6-700-225-01	s	IC TC74VCX157FT(EL)
IC19	8-759-672-76	s	IC AK9813BF-E2

(DR-617 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC20	6-712-631-01	s	IC CAT24C256XI-T2C
IC21	8-759-592-48	s	IC TC7SZ32FU(TE85R)
Q1	8-729-053-11	s	TRANSISTOR FDC6561AN
Q2	8-729-053-12	s	TRANSISTOR FDC6506P
Q3	8-729-053-11	s	TRANSISTOR FDC6561AN
Q4	8-729-053-12	s	TRANSISTOR FDC6506P
Q5	8-729-053-11	s	TRANSISTOR FDC6561AN
Q6	8-729-053-12	s	TRANSISTOR FDC6506P
Q7	8-729-053-11	s	TRANSISTOR FDC6561AN
Q8	8-729-053-12	s	TRANSISTOR FDC6506P
Q9	8-729-053-11	s	TRANSISTOR FDC6561AN
Q10	8-729-053-12	s	TRANSISTOR FDC6506P
R2	1-208-927-81	s	RES, CHIP 47K (1005)
R3	1-208-911-81	s	RES, CHIP 10K (1005)
R6	1-208-863-81	s	RES, CHIP 100 (1005)
R7	1-208-863-81	s	RES, CHIP 100 (1005)
R8	1-208-863-81	s	RES, CHIP 100 (1005)
R9	1-208-863-81	s	RES, CHIP 100 (1005)
R10	1-208-863-81	s	RES, CHIP 100 (1005)
R11	1-220-870-81	s	RES, CHIP 10 (1005)
R12	1-208-915-81	s	RES, CHIP 15K (1005)
R13	1-208-911-81	s	RES, CHIP 10K (1005)
R14	1-208-899-81	s	RES, CHIP 3.3K (1005)
R15	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R18	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R19	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R22	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R23	1-220-878-81	s	RES, CHIP 22 (1005)
R24	1-220-878-81	s	RES, CHIP 22 (1005)
R25	1-220-878-81	s	RES, CHIP 22 (1005)
R26	1-208-859-81	s	RES, CHIP 68 (1005)
R27	1-208-859-81	s	RES, CHIP 68 (1005)
R28	1-208-859-81	s	RES, CHIP 68 (1005)
R29	1-220-878-81	s	RES, CHIP 22 (1005)
R30	1-220-878-81	s	RES, CHIP 22 (1005)
R31	1-220-878-81	s	RES, CHIP 22 (1005)
R32	1-220-878-81	s	RES, CHIP 22 (1005)
R33	1-220-878-81	s	RES, CHIP 22 (1005)
R35	1-208-855-81	s	RES, CHIP 47 (1005)
R36	1-208-863-81	s	RES, CHIP 100 (1005)
R37	1-208-863-81	s	RES, CHIP 100 (1005)
R38	1-208-855-81	s	RES, CHIP 47 (1005)
R39	1-208-855-81	s	RES, CHIP 47 (1005)
R41	1-208-859-81	s	RES, CHIP 68 (1005)
R42	1-208-859-81	s	RES, CHIP 68 (1005)
R43	1-208-859-81	s	RES, CHIP 68 (1005)
R44	1-208-859-81	s	RES, CHIP 68 (1005)
R45	1-208-859-81	s	RES, CHIP 68 (1005)
R46	1-208-859-81	s	RES, CHIP 68 (1005)
R47	1-220-878-81	s	RES, CHIP 22 (1005)
R48	1-208-855-81	s	RES, CHIP 47 (1005)
R49	1-208-863-81	s	RES, CHIP 100 (1005)
R50	1-208-863-81	s	RES, CHIP 100 (1005)
R51	1-208-855-81	s	RES, CHIP 47 (1005)
R52	1-208-855-81	s	RES, CHIP 47 (1005)
R53	1-208-863-81	s	RES, CHIP 100 (1005)
R54	1-208-863-81	s	RES, CHIP 100 (1005)
R55	1-208-855-81	s	RES, CHIP 47 (1005)

(DR-617 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R56	1-208-855-81	s	RES, CHIP 47 (1005)
R58	1-208-859-81	s	RES, CHIP 68 (1005)
R59	1-208-859-81	s	RES, CHIP 68 (1005)
R60	1-208-859-81	s	RES, CHIP 68 (1005)
R61	1-208-859-81	s	RES, CHIP 68 (1005)
R62	1-208-859-81	s	RES, CHIP 68 (1005)
R63	1-208-859-81	s	RES, CHIP 68 (1005)
R64	1-220-878-81	s	RES, CHIP 22 (1005)
R65	1-208-859-81	s	RES, CHIP 68 (1005)
R66	1-208-859-81	s	RES, CHIP 68 (1005)
R67	1-208-859-81	s	RES, CHIP 68 (1005)
R68	1-220-878-81	s	RES, CHIP 22 (1005)
R70	1-208-855-81	s	RES, CHIP 47 (1005)
R71	1-208-855-81	s	RES, CHIP 47 (1005)
R72	1-208-855-81	s	RES, CHIP 47 (1005)
R73	1-208-855-81	s	RES, CHIP 47 (1005)
R75	1-208-855-81	s	RES, CHIP 47 (1005)
R77	1-208-855-81	s	RES, CHIP 47 (1005)
R78	1-208-855-81	s	RES, CHIP 47 (1005)
R79	1-208-855-81	s	RES, CHIP 47 (1005)
R80	1-208-855-81	s	RES, CHIP 47 (1005)
R82	1-208-855-81	s	RES, CHIP 47 (1005)
R83	1-208-855-81	s	RES, CHIP 47 (1005)
R84	1-208-855-81	s	RES, CHIP 47 (1005)
R85	1-208-935-81	s	RES, CHIP 100K (1005)
R86	1-208-935-81	s	RES, CHIP 100K (1005)
R88	1-208-855-81	s	RES, CHIP 47 (1005)
R89	1-208-855-81	s	RES, CHIP 47 (1005)
R90	1-208-855-81	s	RES, CHIP 47 (1005)
R91	1-208-855-81	s	RES, CHIP 47 (1005)
R93	1-208-855-81	s	RES, CHIP 47 (1005)
R94	1-208-871-81	s	RES, CHIP 220 (1005)
R95	1-220-870-81	s	RES, CHIP 10 (1005)
R96	1-208-855-81	s	RES, CHIP 47 (1005)
R97	1-208-855-81	s	RES, CHIP 47 (1005)
R98	1-208-855-81	s	RES, CHIP 47 (1005)
R99	1-220-878-81	s	RES, CHIP 22 (1005)
R100	1-220-878-81	s	RES, CHIP 22 (1005)
R102	1-211-969-91	s	RES, CHIP 10 (1608)
R103	1-211-969-91	s	RES, CHIP 10 (1608)
R104	1-211-969-91	s	RES, CHIP 10 (1608)
R105	1-211-969-91	s	RES, CHIP 10 (1608)
R106	1-208-911-81	s	RES, CHIP 10K (1005)
RB1	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB2	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB4	1-234-381-21	s	RES, NETWORK 100K (1005X4)

DVP-45 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1538-884-B	s	MOUNTED CIRCUIT BOARD, DVP-45
C1	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C2	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C3	1-100-670-91	s	CAP, CERAMIC 4.7MF C (2012)
C4	1-100-670-91	s	CAP, CERAMIC 4.7MF C (2012)
C5	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C6	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C7	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C8	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C9	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C11	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C12	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C13	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C14	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C15	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C16	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C17	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C18	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C19	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C20	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C26	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C27	1-100-880-91	s	CAP, CERAMIC 100MF C (3225)
C28	1-164-939-81	s	CAP, CHIPCERAMIC 2200PF B 1005
C29	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C30	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C31	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C32	1-100-880-91	s	CAP, CERAMIC 100MF C (3225)
C33	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C34	1-164-939-81	s	CAP, CHIPCERAMIC 2200PF B 1005
C35	1-164-939-81	s	CAP, CHIPCERAMIC 2200PF B 1005
C36	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C37	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C38	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C39	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C40	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C41	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C42	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C43	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C44	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C45	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C46	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C47	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C48	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C49	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C50	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C51	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C52	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C53	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C54	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C55	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C56	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C57	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C58	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C59	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C60	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C61	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C62	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C100	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)

(DVP-45 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C101	1-100-670-91	s	CAP, CERAMIC 4.7MF C (2012)
C102	1-100-670-91	s	CAP, CERAMIC 4.7MF C (2012)
C104	1-164-939-81	s	CAP, CHIPCERAMIC 2200PF B 1005
C105	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C106	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C108	1-164-939-81	s	CAP, CHIPCERAMIC 2200PF B 1005
C109	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C111	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C112	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C113	1-100-880-91	s	CAP, CERAMIC 100MF C (3225)
C114	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C115	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C116	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C117	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C118	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C300	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C301	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C302	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C303	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C304	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C305	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C306	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C307	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C308	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C309	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C310	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C311	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C312	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C313	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C314	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C315	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C316	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C317	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C318	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C319	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C400	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C401	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C402	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C500	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C501	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C502	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C503	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C504	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C505	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C506	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C507	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C518	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C519	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C520	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C521	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C522	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C524	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C525	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C526	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C527	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C528	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C529	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C530	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C531	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(DVP-45 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C532	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C533	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C534	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C535	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C536	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C537	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C538	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C539	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C540	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C541	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C542	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C543	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C544	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C545	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C546	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C547	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C548	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C549	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C550	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C556	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C557	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C558	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C559	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C560	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C561	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C562	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C563	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C564	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C565	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C566	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C567	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C568	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C569	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C570	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C571	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C572	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C573	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C574	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C575	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C600	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C601	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C602	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C603	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C604	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C605	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C606	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C607	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C608	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C609	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C610	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C611	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C612	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C613	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C614	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C615	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C616	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C617	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C618	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C619	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(DVP-45 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C620	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C621	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C622	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C623	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C624	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C625	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C626	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C627	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C628	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C629	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C630	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C631	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C632	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C633	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C634	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C638	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C639	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C640	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C641	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C642	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C643	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C644	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C645	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C646	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C647	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C648	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C649	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C650	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C651	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C652	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C653	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C654	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C655	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C656	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C657	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C658	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C659	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C660	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C661	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C662	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C663	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C664	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C665	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C666	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C667	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C668	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C669	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C670	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C671	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C672	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C673	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C674	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C675	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C676	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C677	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C678	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C679	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C700	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C701	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(DVP-45 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C702	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C703	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C704	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C705	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C706	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C707	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C708	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C709	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C710	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C711	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C800	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C801	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C802	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C803	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C804	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C805	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C806	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C807	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C808	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C809	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C810	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C811	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C812	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C813	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C814	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C815	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C816	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C817	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C818	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C819	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C820	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C821	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C822	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C823	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C824	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C825	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C826	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C827	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C900	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C901	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C902	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C903	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C904	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C905	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C906	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C907	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C908	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C909	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C910	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C911	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C912	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C913	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C914	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C915	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C918	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C919	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1000	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1001	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1002	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)

(DVP-45 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1003	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1004	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1005	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1006	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1007	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1008	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1009	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1010	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1011	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1012	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1013	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1014	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1015	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1016	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1017	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1018	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1019	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1020	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1021	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1022	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1023	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1024	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1025	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1026	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1027	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1028	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1029	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1030	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1031	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1032	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1033	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1034	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1035	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1036	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1037	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1038	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1039	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1040	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1041	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1042	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1043	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1044	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1045	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1046	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1047	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1048	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1049	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C1050	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C1052	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1053	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1054	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1055	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1056	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1057	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1058	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C1100	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1101	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1102	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1103	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(DVP-45 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1104	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1105	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1106	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1107	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1200	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1201	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1202	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1203	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1204	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1205	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1206	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1207	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1208	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1209	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1210	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1211	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1212	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1213	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1214	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1215	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1216	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1217	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1218	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1219	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1220	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1221	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1222	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1223	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1224	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1225	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1226	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1227	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1228	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1229	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1230	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1231	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1232	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1233	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1234	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1235	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1236	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1237	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1238	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1239	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1240	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1241	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1242	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1243	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1244	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1245	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1246	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1247	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1248	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1249	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C1250	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C1252	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1253	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1254	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1255	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(DVP-45 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1256	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1257	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1258	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C1300	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1301	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1302	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1303	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1304	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1305	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1306	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1307	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1400	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1401	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1402	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1403	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1404	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1405	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1406	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1407	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1408	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1409	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1410	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1411	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1412	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1413	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1414	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1415	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1416	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1417	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1418	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1419	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1420	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1421	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1422	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1423	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1424	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1425	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1426	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1427	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1428	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1429	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1430	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1431	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1432	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1433	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1434	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1435	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1436	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1437	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1438	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1439	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1440	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1441	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1442	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1443	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1444	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1445	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1446	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1447	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005

(DVP-45 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1448	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1449	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C1450	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C1452	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1453	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1454	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1455	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1456	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1457	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1458	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C1500	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1501	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1502	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1503	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1504	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1505	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1506	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1507	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1600	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1601	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1602	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1603	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1604	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1605	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1606	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1607	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1608	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1609	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1610	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1611	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1612	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1613	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1614	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1615	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1616	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1617	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1700	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1701	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1702	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C1703	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1704	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1705	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1706	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1707	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1708	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1709	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1710	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1711	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1712	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1800	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1801	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1802	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1803	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1804	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1805	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1806	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1807	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1808	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1809	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(DVP-45 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1810	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1811	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1900	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1901	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1902	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1903	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1904	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1905	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1906	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1907	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1908	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1909	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1910	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1911	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1912	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1913	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1914	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1915	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1916	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1917	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1918	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1919	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1920	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1921	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1922	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1923	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1924	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1925	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1926	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1927	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1928	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1929	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1930	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1931	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1932	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1933	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1934	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1935	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1936	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1937	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1938	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1939	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1940	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1941	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1942	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1943	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1944	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1945	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1946	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1947	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1948	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1949	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1950	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1951	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1952	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1953	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1954	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1955	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1956	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(DVP-45 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1957	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1958	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1959	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1960	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1961	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1962	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1963	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1964	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1965	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1966	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1967	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1968	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1969	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1970	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1971	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1972	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C2000	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2001	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2002	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2003	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2004	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2005	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2006	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2007	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2100	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C2101	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C2104	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2105	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2106	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2107	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2108	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2109	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2110	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2111	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2112	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2113	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2114	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2115	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2116	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2117	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2118	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2119	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2122	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C2123	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2124	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2125	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2126	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2127	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2128	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2129	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2130	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2131	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2132	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2133	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2134	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2135	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2136	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2137	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2138	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)

(DVP-45 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C2139	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2140	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2141	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2142	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2146	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2300	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C2402	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2403	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2405	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2406	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2408	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2409	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2410	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2411	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2413	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2414	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2415	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2416	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2417	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2418	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2420	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2421	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2423	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2424	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2425	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2426	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2427	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2428	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2429	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2430	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2431	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2432	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2433	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2434	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
CN101	1-822-444-91	s	CONNECTOR, BOARD TO BOARD 40P
CN900	1-784-086-21	o	PIN, CONNECTOR (PC BOARD) 15P
CN1700	1-778-451-31	s	CONNECTOR, FFC/FPC(ZIF) AN 50P
CN1701	1-580-057-21	s	PIN, CONNECTOR (SMD) 4P
CN2100	1-764-093-21	o	PIN, CONNECTOR (PC BOARD) 8P
D100	8-719-024-71	s	DIODE 1SS362-TE85L
D101	8-719-024-71	s	DIODE 1SS362-TE85L
D102	8-719-024-71	s	DIODE 1SS362-TE85L
D103	8-719-024-71	s	DIODE 1SS362-TE85L
D104	8-719-024-71	s	DIODE 1SS362-TE85L
D105	8-719-024-71	s	DIODE 1SS362-TE85L
D106	8-719-024-71	s	DIODE 1SS362-TE85L
D900	8-719-074-31	s	DIODE CL-196YG-CD-T
D901	8-719-074-31	s	DIODE CL-196YG-CD-T
D902	8-719-074-31	s	DIODE CL-196YG-CD-T
D1700	6-501-052-02	s	DIODE CL-197HB1-D-T
D2000	8-719-077-09	s	DIODE CL-196HR-CD-T
D2001	8-719-077-09	s	DIODE CL-196HR-CD-T
D2002	8-719-077-09	s	DIODE CL-196HR-CD-T
D2003	8-719-077-09	s	DIODE CL-196HR-CD-T
D2004	8-719-074-31	s	DIODE CL-196YG-CD-T
D2005	8-719-074-31	s	DIODE CL-196YG-CD-T
D2006	8-719-074-31	s	DIODE CL-196YG-CD-T
D2007	8-719-074-31	s	DIODE CL-196YG-CD-T

(DVP-45 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
E1	1-535-877-22	s	CHIP, CHECKER
E2	1-535-877-22	s	CHIP, CHECKER
E3	1-535-877-22	s	CHIP, CHECKER
E4	1-535-877-22	s	CHIP, CHECKER
E5	1-535-877-22	s	CHIP, CHECKER
E6	1-535-877-22	s	CHIP, CHECKER
E7	1-535-877-22	s	CHIP, CHECKER
E8	1-535-877-22	s	CHIP, CHECKER
FB1	1-416-976-21	s	FERRITE, EMI (SMD) (3216)
FB2	1-416-976-21	s	FERRITE, EMI (SMD) (3216)
FB3	1-416-976-21	s	FERRITE, EMI (SMD) (3216)
FB4	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB5	1-469-379-21	s	FERRITE, EMI (SMD) (2012)
FB6	1-469-379-21	s	FERRITE, EMI (SMD) (2012)
FB7	1-469-379-21	s	FERRITE, EMI (SMD) (2012)
FB8	1-416-976-21	s	FERRITE, EMI (SMD) (3216)
FB9	1-416-976-21	s	FERRITE, EMI (SMD) (3216)
FB10	1-416-976-21	s	FERRITE, EMI (SMD) (3216)
FB11	1-469-379-21	s	FERRITE, EMI (SMD) (2012)
FB12	1-416-976-21	s	FERRITE, EMI (SMD) (3216)
FB13	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB14	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB300	1-400-834-21	s	FERRITE, EMI (SMD) (1005)
FB301	1-400-834-21	s	FERRITE, EMI (SMD) (1005)
FB302	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB303	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB600	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB601	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB602	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB603	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB604	1-400-834-21	s	FERRITE, EMI (SMD) (1005)
FB605	1-416-976-21	s	FERRITE, EMI (SMD) (3216)
FB700	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB701	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB800	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB801	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB900	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB901	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB1000	1-400-834-21	s	FERRITE, EMI (SMD) (1005)
FB1001	1-400-834-21	s	FERRITE, EMI (SMD) (1005)
FB1002	1-400-834-21	s	FERRITE, EMI (SMD) (1005)
FB1004	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1005	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1006	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1007	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1200	1-400-834-21	s	FERRITE, EMI (SMD) (1005)
FB1201	1-400-834-21	s	FERRITE, EMI (SMD) (1005)
FB1202	1-400-834-21	s	FERRITE, EMI (SMD) (1005)
FB1204	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1205	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1206	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1207	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1400	1-400-834-21	s	FERRITE, EMI (SMD) (1005)
FB1401	1-400-834-21	s	FERRITE, EMI (SMD) (1005)
FB1402	1-400-834-21	s	FERRITE, EMI (SMD) (1005)
FB1403	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1600	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB1601	1-400-462-21	s	FERRITE, EMI (SMD) (1005)

(DVP-45 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
FB1602	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB1700	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB1900	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2100	1-469-379-21	s	FERRITE, EMI (SMD) (2012)
FB2101	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2102	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2400	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB2401	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB2403	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB2404	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB2405	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB2406	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB2407	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB2408	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB2409	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB2410	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB2411	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB2413	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB2414	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
IC1	6-706-220-01	s	IC LTC3411EMS#TR
IC2	6-706-220-01	s	IC LTC3411EMS#TR
IC3	6-703-721-01	s	IC TPS54310PWPR
IC4	6-703-721-01	s	IC TPS54310PWPR
IC5	6-707-373-01	s	IC TPS51100DGQR
IC6	6-707-373-01	s	IC TPS51100DGQR
IC7	6-708-503-01	s	IC LTC3407EMSE-2#TR
IC8	6-706-484-01	s	IC TC7SH04FU(T5RSOYJF)
IC9	6-706-220-01	s	IC LTC3411EMS#TR
IC100	8-759-278-58	s	IC NJM4558V-TE2
IC101	8-759-338-95	s	IC NJM2903V(TE2)
IC102	8-759-646-99	s	IC NJM4556AV(TE2)
IC105	8-759-655-22	s	IC TC7WH34FK(TE85R)
IC201	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC401	8-759-573-97	s	IC SN74LVC541APWR
IC402	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC403	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC600	6-706-484-01	s	IC TC7SH04FU(T5RSOYJF)
IC601	6-704-643-01	s	IC R3112N221A-TR-FA
IC602	6-706-484-01	s	IC TC7SH04FU(T5RSOYJF)
IC603	6-700-599-01	s	IC TC7SA08FU(TE85R)
IC604	6-700-599-01	s	IC TC7SA08FU(TE85R)
IC700	6-704-659-01	s	IC AD1896AYRSZRL
IC701	6-709-647-01	s	IC TLC2932AIPWR
IC702	6-709-647-01	s	IC TLC2932AIPWR
IC703	6-704-659-01	s	IC AD1896AYRSZRL
IC902	8-759-655-22	s	IC TC7WH34FK(TE85R)
IC903	8-759-573-97	s	IC SN74LVC541APWR
IC1000	8-753-276-37	o	IC CXD3195AGG-T6
IC1200	8-753-276-37	o	IC CXD3195AGG-T6
IC1400	8-753-276-37	o	IC CXD3195AGG-T6
IC1602	6-703-848-01	s	IC SN74CB3T3306DCUR
IC1700	8-759-655-22	s	IC TC7WH34FK(TE85R)
IC1701	8-759-392-81	s	IC SN74LVC16245ADGGR
IC1702	8-759-392-81	s	IC SN74LVC16245ADGGR
IC2102	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC2401	6-708-277-01	s	IC CDCVF25081PWR
IC2402	6-708-277-01	s	IC CDCVF25081PWR
IC2403	6-712-342-01	s	IC CDCVF2310PWR
IC2405	8-759-691-77	s	IC TC74VCX541FT(EL)

(DVP-45 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC2406	6-700-599-01	s	IC TC7SA08FU(TE85R)
IC2408	8-759-573-97	s	IC SN74LVC541APWR
IC2409	6-700-599-01	s	IC TC7SA08FU(TE85R)
IC2410	8-759-655-22	s	IC TC7WH34FK(TE85R)
IC2411	6-708-277-01	s	IC CDCVF25081PWR
IC2412	8-759-691-77	s	IC TC74VCX541FT(EL)
IC2413	6-703-875-01	s	IC CDCVF2505PWR
IC2414	6-700-599-01	s	IC TC7SA08FU(TE85R)
IC2415	6-700-599-01	s	IC TC7SA08FU(TE85R)
IC2416	8-759-655-22	s	IC TC7WH34FK(TE85R)
IC2417	6-700-599-01	s	IC TC7SA08FU(TE85R)
L1	1-400-870-21	s	COIL, CHOKE 2.2UH
L2	1-400-870-21	s	COIL, CHOKE 2.2UH
L3	1-456-046-21	s	COIL, CHOKE (SMD) 10UH(10X10)
L4	1-456-046-21	s	COIL, CHOKE (SMD) 10UH(10X10)
L5	1-414-394-41	s	INDUCTOR (SMD) 2.2UH
L6	1-414-394-41	s	INDUCTOR (SMD) 2.2UH
L7	1-400-870-21	s	COIL, CHOKE 2.2UH
Q1	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q2	6-550-832-01	s	TRANSISTOR SI2301BDS-T1
Q3	6-550-832-01	s	TRANSISTOR SI2301BDS-T1
Q4	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q5	6-550-832-01	s	TRANSISTOR SI2301BDS-T1
Q101	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q600	8-729-928-82	s	TRANSISTOR DTC144EE-TL
R1	1-208-919-81	s	RES, CHIP 22K (1005)
R2	1-208-935-81	s	RES, CHIP 100K (1005)
R3	1-208-935-81	s	RES, CHIP 100K (1005)
R4	1-208-919-81	s	RES, CHIP 22K (1005)
R5	1-208-935-81	s	RES, CHIP 100K (1005)
R6	1-208-935-81	s	RES, CHIP 100K (1005)
R7	1-208-911-81	s	RES, CHIP 10K (1005)
R8	1-208-935-81	s	RES, CHIP 100K (1005)
R9	1-208-935-81	s	RES, CHIP 100K (1005)
R11	1-208-899-81	s	RES, CHIP 3.3K (1005)
R12	1-208-911-81	s	RES, CHIP 10K (1005)
R19	1-208-879-81	s	RES, CHIP 470 (1005)
R20	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R21	1-208-895-81	s	RES, CHIP 2.2K (1005)
R22	1-208-879-81	s	RES, CHIP 470 (1005)
R23	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R24	1-208-895-81	s	RES, CHIP 2.2K (1005)
R26	1-208-935-81	s	RES, CHIP 100K (1005)
R28	1-208-927-81	s	RES, CHIP 47K (1005)
R29	1-208-903-81	s	RES, CHIP 4.7K (1005)
R30	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R31	1-208-899-81	s	RES, CHIP 3.3K (1005)
R32	1-208-911-81	s	RES, CHIP 10K (1005)
R33	1-208-903-81	s	RES, CHIP 4.7K (1005)
R34	1-208-899-81	s	RES, CHIP 3.3K (1005)
R35	1-208-927-81	s	RES, CHIP 47K (1005)
R36	1-208-911-81	s	RES, CHIP 10K (1005)
R37	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R38	1-208-911-81	s	RES, CHIP 10K (1005)
R39	1-208-915-81	s	RES, CHIP 15K (1005)
R40	1-208-911-81	s	RES, CHIP 10K (1005)
R41	1-208-923-81	s	RES, CHIP 33K (1005)

(DVP-45 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R42	1-208-959-81	s	RES, CHIP 1M (1005)
R43	1-208-911-81	s	RES, CHIP 10K (1005)
R44	1-208-947-81	s	RES, CHIP 330K (1005)
R45	1-208-911-81	s	RES, CHIP 10K (1005)
R46	1-208-947-81	s	RES, CHIP 330K (1005)
R47	1-208-935-81	s	RES, CHIP 100K (1005)
R48	1-208-927-81	s	RES, CHIP 47K (1005)
R49	1-208-947-81	s	RES, CHIP 330K (1005)
R50	1-208-911-81	s	RES, CHIP 10K (1005)
R100	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R101	1-208-855-81	s	RES, CHIP 47 (1005)
R102	1-208-911-81	s	RES, CHIP 10K (1005)
R103	1-208-911-81	s	RES, CHIP 10K (1005)
R104	1-208-855-81	s	RES, CHIP 47 (1005)
R106	1-208-911-81	s	RES, CHIP 10K (1005)
R107	1-208-911-81	s	RES, CHIP 10K (1005)
R108	1-208-903-81	s	RES, CHIP 4.7K (1005)
R109	1-208-899-81	s	RES, CHIP 3.3K (1005)
R111	1-208-927-81	s	RES, CHIP 47K (1005)
R112	1-208-927-81	s	RES, CHIP 47K (1005)
R113	1-208-959-81	s	RES, CHIP 1M (1005)
R114	1-208-879-81	s	RES, CHIP 470 (1005)
R115	1-208-879-81	s	RES, CHIP 470 (1005)
R116	1-208-903-81	s	RES, CHIP 4.7K (1005)
R117	1-208-887-81	s	RES, CHIP 1.0K (1005)
R118	1-208-895-81	s	RES, CHIP 2.2K (1005)
R119	1-208-895-81	s	RES, CHIP 2.2K (1005)
R120	1-208-935-81	s	RES, CHIP 100K (1005)
R121	1-208-855-81	s	RES, CHIP 47 (1005)
R122	1-208-879-81	s	RES, CHIP 470 (1005)
R123	1-208-895-81	s	RES, CHIP 2.2K (1005)
R124	1-208-907-81	s	RES, CHIP 6.8K (1005)
R125	1-208-935-81	s	RES, CHIP 100K (1005)
R126	1-208-903-81	s	RES, CHIP 4.7K (1005)
R127	1-208-860-81	s	RES, CHIP 75 (1005)
R128	1-208-927-81	s	RES, CHIP 47K (1005)
R129	1-208-935-81	s	RES, CHIP 100K (1005)
R130	1-208-899-81	s	RES, CHIP 3.3K (1005)
R131	1-208-895-81	s	RES, CHIP 2.2K (1005)
R132	1-220-878-81	s	RES, CHIP 22 (1005)
R133	1-220-878-81	s	RES, CHIP 22 (1005)
R134	1-220-878-81	s	RES, CHIP 22 (1005)
R135	1-220-878-81	s	RES, CHIP 22 (1005)
R136	1-208-943-81	s	RES, CHIP 220K (1005)
R137	1-208-943-81	s	RES, CHIP 220K (1005)
R138	1-220-878-81	s	RES, CHIP 22 (1005)
R139	1-220-878-81	s	RES, CHIP 22 (1005)
R140	1-220-878-81	s	RES, CHIP 22 (1005)
R141	1-220-878-81	s	RES, CHIP 22 (1005)
R142	1-220-878-81	s	RES, CHIP 22 (1005)
R200	1-220-878-81	s	RES, CHIP 22 (1005)
R204	1-220-878-81	s	RES, CHIP 22 (1005)
R205	1-220-878-81	s	RES, CHIP 22 (1005)
R206	1-220-878-81	s	RES, CHIP 22 (1005)
R207	1-220-878-81	s	RES, CHIP 22 (1005)
R208	1-220-878-81	s	RES, CHIP 22 (1005)
R209	1-208-855-81	s	RES, CHIP 47 (1005)
R210	1-208-855-81	s	RES, CHIP 47 (1005)
R211	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(DVP-45 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R212	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R213	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R214	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R217	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R218	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R219	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R220	1-208-855-81	s	RES, CHIP 47 (1005)
R221	1-220-878-81	s	RES, CHIP 22 (1005)
R222	1-220-878-81	s	RES, CHIP 22 (1005)
R223	1-220-878-81	s	RES, CHIP 22 (1005)
R225	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R226	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R227	1-208-875-81	s	RES, CHIP 330 (1005)
R228	1-208-903-81	s	RES, CHIP 4.7K (1005)
R229	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R230	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R231	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R232	1-208-857-81	s	RES, CHIP 56 (1005)
R233	1-208-857-81	s	RES, CHIP 56 (1005)
R234	1-208-903-81	s	RES, CHIP 4.7K (1005)
R237	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R238	1-220-878-81	s	RES, CHIP 22 (1005)
R239	1-220-878-81	s	RES, CHIP 22 (1005)
R240	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R241	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R242	1-208-887-81	s	RES, CHIP 1.0K (1005)
R250	1-220-878-81	s	RES, CHIP 22 (1005)
R251	1-220-878-81	s	RES, CHIP 22 (1005)
R252	1-220-878-81	s	RES, CHIP 22 (1005)
R253	1-220-878-81	s	RES, CHIP 22 (1005)
R254	1-220-878-81	s	RES, CHIP 22 (1005)
R255	1-220-878-81	s	RES, CHIP 22 (1005)
R256	1-220-878-81	s	RES, CHIP 22 (1005)
R257	1-220-878-81	s	RES, CHIP 22 (1005)
R262	1-208-911-81	s	RES, CHIP 10K (1005)
R263	1-208-911-81	s	RES, CHIP 10K (1005)
R264	1-208-911-81	s	RES, CHIP 10K (1005)
R265	1-208-911-81	s	RES, CHIP 10K (1005)
R266	1-208-911-81	s	RES, CHIP 10K (1005)
R267	1-208-911-81	s	RES, CHIP 10K (1005)
R268	1-208-911-81	s	RES, CHIP 10K (1005)
R269	1-208-911-81	s	RES, CHIP 10K (1005)
R270	1-220-878-81	s	RES, CHIP 22 (1005)
R271	1-220-878-81	s	RES, CHIP 22 (1005)
R272	1-220-878-81	s	RES, CHIP 22 (1005)
R273	1-208-911-81	s	RES, CHIP 10K (1005)
R274	1-208-911-81	s	RES, CHIP 10K (1005)
R300	1-208-856-81	s	RES, CHIP 51 (1005)
R301	1-208-856-81	s	RES, CHIP 51 (1005)
R302	1-208-856-81	s	RES, CHIP 51 (1005)
R303	1-208-856-81	s	RES, CHIP 51 (1005)
R304	1-208-856-81	s	RES, CHIP 51 (1005)
R305	1-208-856-81	s	RES, CHIP 51 (1005)
R306	1-208-856-81	s	RES, CHIP 51 (1005)
R307	1-208-856-81	s	RES, CHIP 51 (1005)
R308	1-208-856-81	s	RES, CHIP 51 (1005)
R309	1-208-856-81	s	RES, CHIP 51 (1005)
R310	1-208-856-81	s	RES, CHIP 51 (1005)
R311	1-208-856-81	s	RES, CHIP 51 (1005)

(DVP-45 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R312	1-208-856-81	s	RES, CHIP 51 (1005)
R313	1-208-856-81	s	RES, CHIP 51 (1005)
R314	1-208-856-81	s	RES, CHIP 51 (1005)
R315	1-208-856-81	s	RES, CHIP 51 (1005)
R316	1-208-856-81	s	RES, CHIP 51 (1005)
R317	1-208-856-81	s	RES, CHIP 51 (1005)
R318	1-208-856-81	s	RES, CHIP 51 (1005)
R319	1-208-856-81	s	RES, CHIP 51 (1005)
R320	1-208-856-81	s	RES, CHIP 51 (1005)
R321	1-208-863-81	s	RES, CHIP 100 (1005)
R322	1-208-863-81	s	RES, CHIP 100 (1005)
R334	1-220-878-81	s	RES, CHIP 22 (1005)
R335	1-220-878-81	s	RES, CHIP 22 (1005)
R336	1-220-878-81	s	RES, CHIP 22 (1005)
R337	1-220-878-81	s	RES, CHIP 22 (1005)
R338	1-220-878-81	s	RES, CHIP 22 (1005)
R339	1-220-878-81	s	RES, CHIP 22 (1005)
R340	1-220-878-81	s	RES, CHIP 22 (1005)
R341	1-220-878-81	s	RES, CHIP 22 (1005)
R342	1-220-878-81	s	RES, CHIP 22 (1005)
R343	1-220-878-81	s	RES, CHIP 22 (1005)
R344	1-220-878-81	s	RES, CHIP 22 (1005)
R345	1-220-878-81	s	RES, CHIP 22 (1005)
R346	1-220-878-81	s	RES, CHIP 22 (1005)
R347	1-220-878-81	s	RES, CHIP 22 (1005)
R348	1-220-878-81	s	RES, CHIP 22 (1005)
R349	1-220-878-81	s	RES, CHIP 22 (1005)
R350	1-220-878-81	s	RES, CHIP 22 (1005)
R351	1-220-878-81	s	RES, CHIP 22 (1005)
R352	1-220-878-81	s	RES, CHIP 22 (1005)
R353	1-220-878-81	s	RES, CHIP 22 (1005)
R354	1-220-878-81	s	RES, CHIP 22 (1005)
R355	1-220-878-81	s	RES, CHIP 22 (1005)
R356	1-220-878-81	s	RES, CHIP 22 (1005)
R357	1-220-878-81	s	RES, CHIP 22 (1005)
R358	1-220-878-81	s	RES, CHIP 22 (1005)
R359	1-220-878-81	s	RES, CHIP 22 (1005)
R360	1-220-878-81	s	RES, CHIP 22 (1005)
R361	1-220-878-81	s	RES, CHIP 22 (1005)
R362	1-220-878-81	s	RES, CHIP 22 (1005)
R363	1-220-878-81	s	RES, CHIP 22 (1005)
R364	1-220-878-81	s	RES, CHIP 22 (1005)
R365	1-220-878-81	s	RES, CHIP 22 (1005)
R366	1-220-878-81	s	RES, CHIP 22 (1005)
R367	1-220-878-81	s	RES, CHIP 22 (1005)
R368	1-220-878-81	s	RES, CHIP 22 (1005)
R369	1-220-878-81	s	RES, CHIP 22 (1005)
R370	1-220-878-81	s	RES, CHIP 22 (1005)
R371	1-220-878-81	s	RES, CHIP 22 (1005)
R372	1-220-878-81	s	RES, CHIP 22 (1005)
R373	1-220-878-81	s	RES, CHIP 22 (1005)
R374	1-220-878-81	s	RES, CHIP 22 (1005)
R375	1-220-878-81	s	RES, CHIP 22 (1005)
R376	1-220-878-81	s	RES, CHIP 22 (1005)
R377	1-220-878-81	s	RES, CHIP 22 (1005)
R378	1-220-878-81	s	RES, CHIP 22 (1005)
R379	1-208-870-81	s	RES, CHIP 200 (1005)
R380	1-220-878-81	s	RES, CHIP 22 (1005)
R381	1-220-878-81	s	RES, CHIP 22 (1005)

(DVP-45 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R382	1-220-878-81	s	RES, CHIP 22 (1005)
R383	1-220-878-81	s	RES, CHIP 22 (1005)
R384	1-220-878-81	s	RES, CHIP 22 (1005)
R385	1-220-878-81	s	RES, CHIP 22 (1005)
R386	1-220-878-81	s	RES, CHIP 22 (1005)
R387	1-220-878-81	s	RES, CHIP 22 (1005)
R388	1-220-878-81	s	RES, CHIP 22 (1005)
R389	1-220-878-81	s	RES, CHIP 22 (1005)
R390	1-220-878-81	s	RES, CHIP 22 (1005)
R391	1-220-878-81	s	RES, CHIP 22 (1005)
R392	1-220-878-81	s	RES, CHIP 22 (1005)
R393	1-220-878-81	s	RES, CHIP 22 (1005)
R394	1-220-878-81	s	RES, CHIP 22 (1005)
R395	1-220-878-81	s	RES, CHIP 22 (1005)
R396	1-220-878-81	s	RES, CHIP 22 (1005)
R397	1-220-878-81	s	RES, CHIP 22 (1005)
R398	1-220-878-81	s	RES, CHIP 22 (1005)
R399	1-220-878-81	s	RES, CHIP 22 (1005)
R400	1-220-878-81	s	RES, CHIP 22 (1005)
R401	1-220-878-81	s	RES, CHIP 22 (1005)
R402	1-220-878-81	s	RES, CHIP 22 (1005)
R403	1-220-878-81	s	RES, CHIP 22 (1005)
R404	1-208-870-81	s	RES, CHIP 200 (1005)
R405	1-220-878-81	s	RES, CHIP 22 (1005)
R406	1-220-878-81	s	RES, CHIP 22 (1005)
R407	1-220-878-81	s	RES, CHIP 22 (1005)
R408	1-220-878-81	s	RES, CHIP 22 (1005)
R409	1-220-878-81	s	RES, CHIP 22 (1005)
R410	1-220-878-81	s	RES, CHIP 22 (1005)
R411	1-220-878-81	s	RES, CHIP 22 (1005)
R412	1-220-878-81	s	RES, CHIP 22 (1005)
R413	1-220-878-81	s	RES, CHIP 22 (1005)
R414	1-220-878-81	s	RES, CHIP 22 (1005)
R415	1-220-878-81	s	RES, CHIP 22 (1005)
R416	1-220-878-81	s	RES, CHIP 22 (1005)
R417	1-220-878-81	s	RES, CHIP 22 (1005)
R418	1-220-878-81	s	RES, CHIP 22 (1005)
R419	1-220-878-81	s	RES, CHIP 22 (1005)
R420	1-220-878-81	s	RES, CHIP 22 (1005)
R421	1-220-878-81	s	RES, CHIP 22 (1005)
R422	1-220-878-81	s	RES, CHIP 22 (1005)
R423	1-220-878-81	s	RES, CHIP 22 (1005)
R424	1-220-878-81	s	RES, CHIP 22 (1005)
R425	1-220-878-81	s	RES, CHIP 22 (1005)
R426	1-220-878-81	s	RES, CHIP 22 (1005)
R427	1-220-878-81	s	RES, CHIP 22 (1005)
R428	1-220-878-81	s	RES, CHIP 22 (1005)
R429	1-220-878-81	s	RES, CHIP 22 (1005)
R430	1-220-878-81	s	RES, CHIP 22 (1005)
R431	1-220-878-81	s	RES, CHIP 22 (1005)
R432	1-220-878-81	s	RES, CHIP 22 (1005)
R433	1-220-878-81	s	RES, CHIP 22 (1005)
R434	1-220-878-81	s	RES, CHIP 22 (1005)
R435	1-220-878-81	s	RES, CHIP 22 (1005)
R436	1-220-878-81	s	RES, CHIP 22 (1005)
R437	1-220-878-81	s	RES, CHIP 22 (1005)
R438	1-220-878-81	s	RES, CHIP 22 (1005)
R439	1-220-878-81	s	RES, CHIP 22 (1005)
R440	1-220-878-81	s	RES, CHIP 22 (1005)

(DVP-45 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R441	1-220-878-81	s	RES, CHIP 22 (1005)
R442	1-220-878-81	s	RES, CHIP 22 (1005)
R443	1-220-878-81	s	RES, CHIP 22 (1005)
R444	1-220-878-81	s	RES, CHIP 22 (1005)
R445	1-220-878-81	s	RES, CHIP 22 (1005)
R446	1-220-878-81	s	RES, CHIP 22 (1005)
R447	1-220-878-81	s	RES, CHIP 22 (1005)
R448	1-220-878-81	s	RES, CHIP 22 (1005)
R449	1-220-878-81	s	RES, CHIP 22 (1005)
R450	1-220-878-81	s	RES, CHIP 22 (1005)
R451	1-208-870-81	s	RES, CHIP 200 (1005)
R452	1-220-878-81	s	RES, CHIP 22 (1005)
R453	1-220-878-81	s	RES, CHIP 22 (1005)
R454	1-220-878-81	s	RES, CHIP 22 (1005)
R455	1-220-878-81	s	RES, CHIP 22 (1005)
R456	1-220-878-81	s	RES, CHIP 22 (1005)
R457	1-220-878-81	s	RES, CHIP 22 (1005)
R458	1-220-878-81	s	RES, CHIP 22 (1005)
R459	1-220-878-81	s	RES, CHIP 22 (1005)
R460	1-220-878-81	s	RES, CHIP 22 (1005)
R461	1-220-878-81	s	RES, CHIP 22 (1005)
R462	1-220-878-81	s	RES, CHIP 22 (1005)
R463	1-220-878-81	s	RES, CHIP 22 (1005)
R464	1-220-878-81	s	RES, CHIP 22 (1005)
R465	1-220-878-81	s	RES, CHIP 22 (1005)
R466	1-220-878-81	s	RES, CHIP 22 (1005)
R467	1-220-878-81	s	RES, CHIP 22 (1005)
R468	1-220-878-81	s	RES, CHIP 22 (1005)
R469	1-220-878-81	s	RES, CHIP 22 (1005)
R470	1-220-878-81	s	RES, CHIP 22 (1005)
R471	1-220-878-81	s	RES, CHIP 22 (1005)
R472	1-220-878-81	s	RES, CHIP 22 (1005)
R473	1-220-878-81	s	RES, CHIP 22 (1005)
R474	1-220-878-81	s	RES, CHIP 22 (1005)
R475	1-220-878-81	s	RES, CHIP 22 (1005)
R476	1-208-870-81	s	RES, CHIP 200 (1005)
R477	1-220-878-81	s	RES, CHIP 22 (1005)
R478	1-208-856-81	s	RES, CHIP 51 (1005)
R479	1-208-856-81	s	RES, CHIP 51 (1005)
R480	1-208-856-81	s	RES, CHIP 51 (1005)
R481	1-208-856-81	s	RES, CHIP 51 (1005)
R482	1-208-856-81	s	RES, CHIP 51 (1005)
R483	1-208-856-81	s	RES, CHIP 51 (1005)
R484	1-208-856-81	s	RES, CHIP 51 (1005)
R485	1-208-856-81	s	RES, CHIP 51 (1005)
R486	1-208-856-81	s	RES, CHIP 51 (1005)
R487	1-208-856-81	s	RES, CHIP 51 (1005)
R488	1-208-856-81	s	RES, CHIP 51 (1005)
R489	1-208-856-81	s	RES, CHIP 51 (1005)
R490	1-208-856-81	s	RES, CHIP 51 (1005)
R491	1-208-856-81	s	RES, CHIP 51 (1005)
R492	1-208-856-81	s	RES, CHIP 51 (1005)
R493	1-208-856-81	s	RES, CHIP 51 (1005)
R494	1-208-856-81	s	RES, CHIP 51 (1005)
R495	1-208-856-81	s	RES, CHIP 51 (1005)
R496	1-208-856-81	s	RES, CHIP 51 (1005)
R497	1-208-856-81	s	RES, CHIP 51 (1005)
R498	1-208-856-81	s	RES, CHIP 51 (1005)
R499	1-208-863-81	s	RES, CHIP 100 (1005)

(DVP-45 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R500	1-208-863-81	s	RES, CHIP 100 (1005)
R600	1-208-903-81	s	RES, CHIP 4.7K (1005)
R601	1-208-903-81	s	RES, CHIP 4.7K (1005)
R602	1-208-903-81	s	RES, CHIP 4.7K (1005)
R608	1-220-878-81	s	RES, CHIP 22 (1005)
R609	1-208-911-81	s	RES, CHIP 10K (1005)
R610	1-220-878-81	s	RES, CHIP 22 (1005)
R611	1-208-887-81	s	RES, CHIP 1.0K (1005)
R700	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R701	1-208-899-81	s	RES, CHIP 3.3K (1005)
R703	1-208-899-81	s	RES, CHIP 3.3K (1005)
R705	1-208-915-81	s	RES, CHIP 15K (1005)
R706	1-208-895-81	s	RES, CHIP 2.2K (1005)
R707	1-208-871-81	s	RES, CHIP 220 (1005)
R708	1-208-915-81	s	RES, CHIP 15K (1005)
R709	1-208-895-81	s	RES, CHIP 2.2K (1005)
R710	1-208-871-81	s	RES, CHIP 220 (1005)
R711	1-208-855-81	s	RES, CHIP 47 (1005)
R712	1-208-855-81	s	RES, CHIP 47 (1005)
R713	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R718	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R719	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R720	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R722	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R801	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R802	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R803	1-208-927-81	s	RES, CHIP 47K (1005)
R804	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R805	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R806	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R807	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R808	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R809	1-208-927-81	s	RES, CHIP 47K (1005)
R810	1-208-927-81	s	RES, CHIP 47K (1005)
R812	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R813	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R814	1-208-927-81	s	RES, CHIP 47K (1005)
R815	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R816	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R817	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R818	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R819	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R820	1-208-927-81	s	RES, CHIP 47K (1005)
R821	1-208-927-81	s	RES, CHIP 47K (1005)
R901	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R902	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R903	1-208-927-81	s	RES, CHIP 47K (1005)
R904	1-208-927-81	s	RES, CHIP 47K (1005)
R905	1-208-927-81	s	RES, CHIP 47K (1005)
R906	1-208-927-81	s	RES, CHIP 47K (1005)
R907	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R908	1-208-927-81	s	RES, CHIP 47K (1005)
R909	1-208-927-81	s	RES, CHIP 47K (1005)
R910	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R911	1-208-903-81	s	RES, CHIP 4.7K (1005)
R912	1-208-903-81	s	RES, CHIP 4.7K (1005)
R913	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R914	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R915	1-208-855-81	s	RES, CHIP 47 (1005)

(DVP-45 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R916	1-208-855-81	s	RES, CHIP 47 (1005)
R917	1-208-855-81	s	RES, CHIP 47 (1005)
R921	1-208-903-81	s	RES, CHIP 4.7K (1005)
R922	1-208-875-81	s	RES, CHIP 330 (1005)
R1000	1-220-878-81	s	RES, CHIP 22 (1005)
R1005	1-220-878-81	s	RES, CHIP 22 (1005)
R1006	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1007	1-208-911-81	s	RES, CHIP 10K (1005)
R1008	1-220-882-81	s	RES, CHIP 33 (1005)
R1009	1-220-878-81	s	RES, CHIP 22 (1005)
R1011	1-208-935-81	s	RES, CHIP 100K (1005)
R1013	1-208-911-81	s	RES, CHIP 10K (1005)
R1014	1-208-911-81	s	RES, CHIP 10K (1005)
R1015	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1016	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1017	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1018	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1019	1-208-911-81	s	RES, CHIP 10K (1005)
R1020	1-220-878-81	s	RES, CHIP 22 (1005)
R1022	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1023	1-220-878-81	s	RES, CHIP 22 (1005)
R1025	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1026	1-220-878-81	s	RES, CHIP 22 (1005)
R1205	1-220-882-81	s	RES, CHIP 33 (1005)
R1206	1-220-882-81	s	RES, CHIP 33 (1005)
R1207	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1208	1-220-878-81	s	RES, CHIP 22 (1005)
R1209	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1210	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1211	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1213	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1214	1-208-911-81	s	RES, CHIP 10K (1005)
R1216	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1217	1-220-878-81	s	RES, CHIP 22 (1005)
R1219	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1220	1-220-878-81	s	RES, CHIP 22 (1005)
R1221	1-220-878-81	s	RES, CHIP 22 (1005)
R1400	1-220-878-81	s	RES, CHIP 22 (1005)
R1405	1-220-882-81	s	RES, CHIP 33 (1005)
R1406	1-220-882-81	s	RES, CHIP 33 (1005)
R1407	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1408	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1409	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1410	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1411	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1412	1-220-878-81	s	RES, CHIP 22 (1005)
R1413	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1414	1-208-911-81	s	RES, CHIP 10K (1005)
R1416	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1417	1-220-878-81	s	RES, CHIP 22 (1005)
R1419	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1420	1-220-878-81	s	RES, CHIP 22 (1005)
R1600	1-208-911-81	s	RES, CHIP 10K (1005)
R1601	1-208-911-81	s	RES, CHIP 10K (1005)
R1602	1-208-911-81	s	RES, CHIP 10K (1005)
R1603	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1604	1-208-943-81	s	RES, CHIP 220K (1005)
R1605	1-208-943-81	s	RES, CHIP 220K (1005)
R1606	1-208-943-81	s	RES, CHIP 220K (1005)

(DVP-45 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1607	1-208-943-81	s	RES, CHIP 220K (1005)
R1608	1-208-911-81	s	RES, CHIP 10K (1005)
R1609	1-208-911-81	s	RES, CHIP 10K (1005)
R1610	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1611	1-208-943-81	s	RES, CHIP 220K (1005)
R1612	1-208-943-81	s	RES, CHIP 220K (1005)
R1613	1-208-943-81	s	RES, CHIP 220K (1005)
R1614	1-208-943-81	s	RES, CHIP 220K (1005)
R1615	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1616	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1617	1-208-943-81	s	RES, CHIP 220K (1005)
R1618	1-208-911-81	s	RES, CHIP 10K (1005)
R1619	1-208-911-81	s	RES, CHIP 10K (1005)
R1700	1-208-879-81	s	RES, CHIP 470 (1005)
R1703	1-208-911-81	s	RES, CHIP 10K (1005)
R1704	1-220-878-81	s	RES, CHIP 22 (1005)
R1705	1-220-878-81	s	RES, CHIP 22 (1005)
R1706	1-208-871-81	s	RES, CHIP 220 (1005)
R1707	1-208-911-81	s	RES, CHIP 10K (1005)
R1708	1-220-882-81	s	RES, CHIP 33 (1005)
R1709	1-208-855-81	s	RES, CHIP 47 (1005)
R1710	1-208-911-81	s	RES, CHIP 10K (1005)
R1711	1-208-911-81	s	RES, CHIP 10K (1005)
R1712	1-208-911-81	s	RES, CHIP 10K (1005)
R1713	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1716	1-208-861-81	s	RES, CHIP 82 (1005)
R1717	1-208-861-81	s	RES, CHIP 82 (1005)
R1718	1-208-861-81	s	RES, CHIP 82 (1005)
R1719	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1720	1-208-911-81	s	RES, CHIP 10K (1005)
R1721	1-208-911-81	s	RES, CHIP 10K (1005)
R1722	1-208-905-81	s	RES, CHIP 5.6K (1005)
R1723	1-208-911-81	s	RES, CHIP 10K (1005)
R1724	1-220-878-81	s	RES, CHIP 22 (1005)
R1725	1-208-863-81	s	RES, CHIP 100 (1005)
R1731	1-208-911-81	s	RES, CHIP 10K (1005)
R1732	1-208-911-81	s	RES, CHIP 10K (1005)
R1733	1-220-870-81	s	RES, CHIP 10 (1005)
R1734	1-220-878-81	s	RES, CHIP 22 (1005)
R1735	1-208-911-81	s	RES, CHIP 10K (1005)
R1736	1-208-911-81	s	RES, CHIP 10K (1005)
R1737	1-208-911-81	s	RES, CHIP 10K (1005)
R1738	1-220-878-81	s	RES, CHIP 22 (1005)
R1739	1-220-878-81	s	RES, CHIP 22 (1005)
R1740	1-208-856-81	s	RES, CHIP 51 (1005)
R1741	1-208-856-81	s	RES, CHIP 51 (1005)
R1742	1-208-856-81	s	RES, CHIP 51 (1005)
R1743	1-208-856-81	s	RES, CHIP 51 (1005)
R1744	1-208-856-81	s	RES, CHIP 51 (1005)
R1745	1-208-856-81	s	RES, CHIP 51 (1005)
R1746	1-208-856-81	s	RES, CHIP 51 (1005)
R1747	1-208-856-81	s	RES, CHIP 51 (1005)
R1748	1-208-856-81	s	RES, CHIP 51 (1005)
R1749	1-208-856-81	s	RES, CHIP 51 (1005)
R1750	1-208-856-81	s	RES, CHIP 51 (1005)
R1751	1-208-856-81	s	RES, CHIP 51 (1005)
R1752	1-208-856-81	s	RES, CHIP 51 (1005)
R1753	1-208-856-81	s	RES, CHIP 51 (1005)
R1754	1-208-856-81	s	RES, CHIP 51 (1005)

(DVP-45 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1755	1-208-856-81	s	RES, CHIP 51 (1005)
R1756	1-208-856-81	s	RES, CHIP 51 (1005)
R1757	1-208-856-81	s	RES, CHIP 51 (1005)
R1758	1-208-856-81	s	RES, CHIP 51 (1005)
R1759	1-208-856-81	s	RES, CHIP 51 (1005)
R1760	1-208-856-81	s	RES, CHIP 51 (1005)
R1761	1-208-856-81	s	RES, CHIP 51 (1005)
R1762	1-208-856-81	s	RES, CHIP 51 (1005)
R1763	1-208-856-81	s	RES, CHIP 51 (1005)
R1764	1-208-856-81	s	RES, CHIP 51 (1005)
R1765	1-208-856-81	s	RES, CHIP 51 (1005)
R1766	1-208-856-81	s	RES, CHIP 51 (1005)
R1767	1-208-856-81	s	RES, CHIP 51 (1005)
R1768	1-208-856-81	s	RES, CHIP 51 (1005)
R1769	1-208-856-81	s	RES, CHIP 51 (1005)
R1770	1-208-856-81	s	RES, CHIP 51 (1005)
R1771	1-208-856-81	s	RES, CHIP 51 (1005)
R1772	1-208-856-81	s	RES, CHIP 51 (1005)
R1773	1-208-856-81	s	RES, CHIP 51 (1005)
R1774	1-208-856-81	s	RES, CHIP 51 (1005)
R1775	1-208-856-81	s	RES, CHIP 51 (1005)
R1776	1-208-856-81	s	RES, CHIP 51 (1005)
R1777	1-208-856-81	s	RES, CHIP 51 (1005)
R1778	1-208-856-81	s	RES, CHIP 51 (1005)
R1779	1-208-856-81	s	RES, CHIP 51 (1005)
R1780	1-208-856-81	s	RES, CHIP 51 (1005)
R1781	1-208-856-81	s	RES, CHIP 51 (1005)
R1782	1-208-856-81	s	RES, CHIP 51 (1005)
R1783	1-208-856-81	s	RES, CHIP 51 (1005)
R1784	1-208-856-81	s	RES, CHIP 51 (1005)
R1785	1-208-856-81	s	RES, CHIP 51 (1005)
R1786	1-208-856-81	s	RES, CHIP 51 (1005)
R1787	1-208-856-81	s	RES, CHIP 51 (1005)
R1788	1-208-856-81	s	RES, CHIP 51 (1005)
R1789	1-208-911-81	s	RES, CHIP 10K (1005)
R1790	1-220-878-81	s	RES, CHIP 22 (1005)
R1791	1-208-856-81	s	RES, CHIP 51 (1005)
R1792	1-208-856-81	s	RES, CHIP 51 (1005)
R1793	1-208-856-81	s	RES, CHIP 51 (1005)
R1794	1-208-856-81	s	RES, CHIP 51 (1005)
R1795	1-208-856-81	s	RES, CHIP 51 (1005)
R1796	1-208-856-81	s	RES, CHIP 51 (1005)
R1797	1-208-856-81	s	RES, CHIP 51 (1005)
R1798	1-208-856-81	s	RES, CHIP 51 (1005)
R1799	1-208-856-81	s	RES, CHIP 51 (1005)
R1800	1-208-856-81	s	RES, CHIP 51 (1005)
R1801	1-208-856-81	s	RES, CHIP 51 (1005)
R1802	1-208-856-81	s	RES, CHIP 51 (1005)
R1803	1-208-856-81	s	RES, CHIP 51 (1005)
R1804	1-208-856-81	s	RES, CHIP 51 (1005)
R1805	1-208-856-81	s	RES, CHIP 51 (1005)
R1806	1-220-878-81	s	RES, CHIP 22 (1005)
R1807	1-220-878-81	s	RES, CHIP 22 (1005)
R1808	1-220-878-81	s	RES, CHIP 22 (1005)
R1809	1-220-878-81	s	RES, CHIP 22 (1005)
R1810	1-220-878-81	s	RES, CHIP 22 (1005)
R1811	1-220-878-81	s	RES, CHIP 22 (1005)
R1812	1-220-878-81	s	RES, CHIP 22 (1005)
R1813	1-220-878-81	s	RES, CHIP 22 (1005)

(DVP-45 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1814	1-220-878-81	s	RES, CHIP 22 (1005)
R1815	1-220-878-81	s	RES, CHIP 22 (1005)
R1816	1-220-878-81	s	RES, CHIP 22 (1005)
R1817	1-220-878-81	s	RES, CHIP 22 (1005)
R1818	1-220-878-81	s	RES, CHIP 22 (1005)
R1819	1-220-878-81	s	RES, CHIP 22 (1005)
R1820	1-220-878-81	s	RES, CHIP 22 (1005)
R1821	1-220-878-81	s	RES, CHIP 22 (1005)
R1822	1-220-878-81	s	RES, CHIP 22 (1005)
R1823	1-220-878-81	s	RES, CHIP 22 (1005)
R1824	1-220-878-81	s	RES, CHIP 22 (1005)
R1825	1-220-878-81	s	RES, CHIP 22 (1005)
R1826	1-220-878-81	s	RES, CHIP 22 (1005)
R1827	1-220-878-81	s	RES, CHIP 22 (1005)
R1828	1-220-878-81	s	RES, CHIP 22 (1005)
R1829	1-220-878-81	s	RES, CHIP 22 (1005)
R1830	1-220-878-81	s	RES, CHIP 22 (1005)
R1831	1-220-878-81	s	RES, CHIP 22 (1005)
R1832	1-220-878-81	s	RES, CHIP 22 (1005)
R1833	1-220-878-81	s	RES, CHIP 22 (1005)
R1834	1-220-878-81	s	RES, CHIP 22 (1005)
R1835	1-220-878-81	s	RES, CHIP 22 (1005)
R1836	1-220-878-81	s	RES, CHIP 22 (1005)
R1837	1-220-878-81	s	RES, CHIP 22 (1005)
R1838	1-220-878-81	s	RES, CHIP 22 (1005)
R1839	1-208-856-81	s	RES, CHIP 51 (1005)
R1840	1-208-856-81	s	RES, CHIP 51 (1005)
R1841	1-208-856-81	s	RES, CHIP 51 (1005)
R1842	1-208-856-81	s	RES, CHIP 51 (1005)
R1843	1-208-856-81	s	RES, CHIP 51 (1005)
R1844	1-208-856-81	s	RES, CHIP 51 (1005)
R1845	1-208-856-81	s	RES, CHIP 51 (1005)
R1846	1-208-856-81	s	RES, CHIP 51 (1005)
R1847	1-208-856-81	s	RES, CHIP 51 (1005)
R1848	1-208-856-81	s	RES, CHIP 51 (1005)
R1849	1-208-856-81	s	RES, CHIP 51 (1005)
R1850	1-208-856-81	s	RES, CHIP 51 (1005)
R1851	1-208-856-81	s	RES, CHIP 51 (1005)
R1852	1-208-856-81	s	RES, CHIP 51 (1005)
R1853	1-208-856-81	s	RES, CHIP 51 (1005)
R1854	1-208-856-81	s	RES, CHIP 51 (1005)
R1855	1-208-863-81	s	RES, CHIP 100 (1005)
R1856	1-208-855-81	s	RES, CHIP 47 (1005)
R1857	1-208-855-81	s	RES, CHIP 47 (1005)
R1858	1-220-878-81	s	RES, CHIP 22 (1005)
R1859	1-220-878-81	s	RES, CHIP 22 (1005)
R1860	1-220-878-81	s	RES, CHIP 22 (1005)
R1861	1-220-878-81	s	RES, CHIP 22 (1005)
R1862	1-220-878-81	s	RES, CHIP 22 (1005)
R1863	1-220-878-81	s	RES, CHIP 22 (1005)
R1864	1-220-878-81	s	RES, CHIP 22 (1005)
R1865	1-220-878-81	s	RES, CHIP 22 (1005)
R1866	1-220-878-81	s	RES, CHIP 22 (1005)
R1867	1-220-878-81	s	RES, CHIP 22 (1005)
R1868	1-220-878-81	s	RES, CHIP 22 (1005)
R1869	1-220-878-81	s	RES, CHIP 22 (1005)
R1870	1-220-878-81	s	RES, CHIP 22 (1005)
R1871	1-220-878-81	s	RES, CHIP 22 (1005)
R1872	1-220-878-81	s	RES, CHIP 22 (1005)

(DVP-45 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1873	1-220-878-81	s	RES, CHIP 22 (1005)
R1874	1-220-878-81	s	RES, CHIP 22 (1005)
R1875	1-220-878-81	s	RES, CHIP 22 (1005)
R1876	1-220-878-81	s	RES, CHIP 22 (1005)
R1877	1-220-878-81	s	RES, CHIP 22 (1005)
R1878	1-220-878-81	s	RES, CHIP 22 (1005)
R1879	1-208-855-81	s	RES, CHIP 47 (1005)
R1880	1-208-855-81	s	RES, CHIP 47 (1005)
R1881	1-220-878-81	s	RES, CHIP 22 (1005)
R1882	1-220-878-81	s	RES, CHIP 22 (1005)
R1883	1-208-855-81	s	RES, CHIP 47 (1005)
R1884	1-208-855-81	s	RES, CHIP 47 (1005)
R1885	1-220-878-81	s	RES, CHIP 22 (1005)
R1886	1-220-878-81	s	RES, CHIP 22 (1005)
R1887	1-220-878-81	s	RES, CHIP 22 (1005)
R1888	1-220-878-81	s	RES, CHIP 22 (1005)
R1889	1-220-878-81	s	RES, CHIP 22 (1005)
R1890	1-220-878-81	s	RES, CHIP 22 (1005)
R1891	1-220-878-81	s	RES, CHIP 22 (1005)
R1892	1-220-878-81	s	RES, CHIP 22 (1005)
R1893	1-220-878-81	s	RES, CHIP 22 (1005)
R1894	1-220-878-81	s	RES, CHIP 22 (1005)
R1895	1-220-878-81	s	RES, CHIP 22 (1005)
R1896	1-220-878-81	s	RES, CHIP 22 (1005)
R1897	1-220-878-81	s	RES, CHIP 22 (1005)
R1898	1-220-878-81	s	RES, CHIP 22 (1005)
R1899	1-220-878-81	s	RES, CHIP 22 (1005)
R1900	1-220-878-81	s	RES, CHIP 22 (1005)
R1901	1-220-878-81	s	RES, CHIP 22 (1005)
R1902	1-220-878-81	s	RES, CHIP 22 (1005)
R1903	1-220-878-81	s	RES, CHIP 22 (1005)
R1904	1-220-878-81	s	RES, CHIP 22 (1005)
R1905	1-208-863-81	s	RES, CHIP 100 (1005)
R1906	1-208-863-81	s	RES, CHIP 100 (1005)
R1907	1-208-863-81	s	RES, CHIP 100 (1005)
R1908	1-220-878-81	s	RES, CHIP 22 (1005)
R1909	1-220-878-81	s	RES, CHIP 22 (1005)
R1910	1-220-878-81	s	RES, CHIP 22 (1005)
R1911	1-220-878-81	s	RES, CHIP 22 (1005)
R1912	1-220-878-81	s	RES, CHIP 22 (1005)
R1913	1-220-878-81	s	RES, CHIP 22 (1005)
R1914	1-220-878-81	s	RES, CHIP 22 (1005)
R1915	1-220-878-81	s	RES, CHIP 22 (1005)
R1916	1-220-878-81	s	RES, CHIP 22 (1005)
R1917	1-220-878-81	s	RES, CHIP 22 (1005)
R1918	1-220-878-81	s	RES, CHIP 22 (1005)
R1919	1-220-878-81	s	RES, CHIP 22 (1005)
R1920	1-220-878-81	s	RES, CHIP 22 (1005)
R1921	1-220-878-81	s	RES, CHIP 22 (1005)
R1922	1-220-878-81	s	RES, CHIP 22 (1005)
R1923	1-220-878-81	s	RES, CHIP 22 (1005)
R1924	1-220-878-81	s	RES, CHIP 22 (1005)
R1925	1-220-878-81	s	RES, CHIP 22 (1005)
R1926	1-220-878-81	s	RES, CHIP 22 (1005)
R1927	1-220-878-81	s	RES, CHIP 22 (1005)
R1928	1-220-878-81	s	RES, CHIP 22 (1005)
R1929	1-220-878-81	s	RES, CHIP 22 (1005)
R1930	1-220-878-81	s	RES, CHIP 22 (1005)
R1931	1-220-878-81	s	RES, CHIP 22 (1005)

(DVP-45 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1932	1-220-878-81	s	RES, CHIP 22 (1005)
R1933	1-220-878-81	s	RES, CHIP 22 (1005)
R1934	1-220-878-81	s	RES, CHIP 22 (1005)
R1935	1-220-878-81	s	RES, CHIP 22 (1005)
R1936	1-220-878-81	s	RES, CHIP 22 (1005)
R1937	1-208-855-81	s	RES, CHIP 47 (1005)
R1938	1-208-855-81	s	RES, CHIP 47 (1005)
R1939	1-220-878-81	s	RES, CHIP 22 (1005)
R1940	1-220-878-81	s	RES, CHIP 22 (1005)
R1941	1-220-878-81	s	RES, CHIP 22 (1005)
R1942	1-220-878-81	s	RES, CHIP 22 (1005)
R1943	1-220-878-81	s	RES, CHIP 22 (1005)
R1944	1-220-878-81	s	RES, CHIP 22 (1005)
R1945	1-220-878-81	s	RES, CHIP 22 (1005)
R1946	1-220-878-81	s	RES, CHIP 22 (1005)
R1947	1-220-878-81	s	RES, CHIP 22 (1005)
R1948	1-220-878-81	s	RES, CHIP 22 (1005)
R1949	1-208-856-81	s	RES, CHIP 51 (1005)
R1950	1-208-856-81	s	RES, CHIP 51 (1005)
R1951	1-208-856-81	s	RES, CHIP 51 (1005)
R1952	1-208-856-81	s	RES, CHIP 51 (1005)
R1954	1-208-856-81	s	RES, CHIP 51 (1005)
R1955	1-208-856-81	s	RES, CHIP 51 (1005)
R1956	1-208-856-81	s	RES, CHIP 51 (1005)
R1957	1-208-856-81	s	RES, CHIP 51 (1005)
R1958	1-208-856-81	s	RES, CHIP 51 (1005)
R1959	1-208-856-81	s	RES, CHIP 51 (1005)
R1960	1-208-856-81	s	RES, CHIP 51 (1005)
R1961	1-208-856-81	s	RES, CHIP 51 (1005)
R1963	1-220-878-81	s	RES, CHIP 22 (1005)
R1964	1-220-878-81	s	RES, CHIP 22 (1005)
R1965	1-220-878-81	s	RES, CHIP 22 (1005)
R1966	1-220-878-81	s	RES, CHIP 22 (1005)
R1967	1-220-878-81	s	RES, CHIP 22 (1005)
R1968	1-220-878-81	s	RES, CHIP 22 (1005)
R1969	1-220-878-81	s	RES, CHIP 22 (1005)
R1970	1-208-856-81	s	RES, CHIP 51 (1005)
R1971	1-208-856-81	s	RES, CHIP 51 (1005)
R1972	1-208-856-81	s	RES, CHIP 51 (1005)
R1973	1-208-856-81	s	RES, CHIP 51 (1005)
R1974	1-208-856-81	s	RES, CHIP 51 (1005)
R1975	1-208-856-81	s	RES, CHIP 51 (1005)
R1976	1-208-856-81	s	RES, CHIP 51 (1005)
R1977	1-208-856-81	s	RES, CHIP 51 (1005)
R1978	1-208-856-81	s	RES, CHIP 51 (1005)
R1979	1-208-856-81	s	RES, CHIP 51 (1005)
R1980	1-208-856-81	s	RES, CHIP 51 (1005)
R1981	1-208-856-81	s	RES, CHIP 51 (1005)
R1982	1-208-856-81	s	RES, CHIP 51 (1005)
R1983	1-208-856-81	s	RES, CHIP 51 (1005)
R1984	1-208-856-81	s	RES, CHIP 51 (1005)
R1985	1-208-856-81	s	RES, CHIP 51 (1005)
R1986	1-208-935-81	s	RES, CHIP 100K (1005)
R1987	1-208-935-81	s	RES, CHIP 100K (1005)
R2001	1-220-878-81	s	RES, CHIP 22 (1005)
R2002	1-220-878-81	s	RES, CHIP 22 (1005)
R2003	1-220-878-81	s	RES, CHIP 22 (1005)
R2004	1-220-878-81	s	RES, CHIP 22 (1005)
R2005	1-220-878-81	s	RES, CHIP 22 (1005)

(DVP-45 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R2006	1-220-878-81	s	RES, CHIP 22 (1005)
R2007	1-220-878-81	s	RES, CHIP 22 (1005)
R2008	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2009	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2100	1-208-875-81	s	RES, CHIP 330 (1005)
R2101	1-220-878-81	s	RES, CHIP 22 (1005)
R2105	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2107	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2110	1-220-878-81	s	RES, CHIP 22 (1005)
R2111	1-220-878-81	s	RES, CHIP 22 (1005)
R2112	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2113	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2114	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2115	1-208-927-81	s	RES, CHIP 47K (1005)
R2301	1-220-878-81	s	RES, CHIP 22 (1005)
R2302	1-220-878-81	s	RES, CHIP 22 (1005)
R2303	1-220-878-81	s	RES, CHIP 22 (1005)
R2304	1-220-878-81	s	RES, CHIP 22 (1005)
R2305	1-220-878-81	s	RES, CHIP 22 (1005)
R2306	1-220-878-81	s	RES, CHIP 22 (1005)
R2307	1-220-878-81	s	RES, CHIP 22 (1005)
R2308	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2309	1-220-878-81	s	RES, CHIP 22 (1005)
R2310	1-220-878-81	s	RES, CHIP 22 (1005)
R2400	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2401	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2404	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2405	1-208-935-81	s	RES, CHIP 100K (1005)
R2406	1-208-935-81	s	RES, CHIP 100K (1005)
R2409	1-208-935-81	s	RES, CHIP 100K (1005)
R2410	1-208-935-81	s	RES, CHIP 100K (1005)
R2411	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2419	1-220-870-81	s	RES, CHIP 10 (1005)
R2420	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2421	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2422	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2423	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2424	1-220-870-81	s	RES, CHIP 10 (1005)
R2425	1-220-870-81	s	RES, CHIP 10 (1005)
R2426	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2427	1-220-878-81	s	RES, CHIP 22 (1005)
R2428	1-220-878-81	s	RES, CHIP 22 (1005)
R2429	1-220-878-81	s	RES, CHIP 22 (1005)
R2430	1-220-878-81	s	RES, CHIP 22 (1005)
R2431	1-220-878-81	s	RES, CHIP 22 (1005)
R2432	1-220-878-81	s	RES, CHIP 22 (1005)
R2433	1-220-878-81	s	RES, CHIP 22 (1005)
R2434	1-220-878-81	s	RES, CHIP 22 (1005)
R2437	1-220-870-81	s	RES, CHIP 10 (1005)
R2440	1-208-855-81	s	RES, CHIP 47 (1005)
R2441	1-220-878-81	s	RES, CHIP 22 (1005)
R2442	1-220-878-81	s	RES, CHIP 22 (1005)
R2443	1-220-878-81	s	RES, CHIP 22 (1005)
R2444	1-220-878-81	s	RES, CHIP 22 (1005)
R2445	1-208-855-81	s	RES, CHIP 47 (1005)
R2446	1-220-878-81	s	RES, CHIP 22 (1005)
R2447	1-220-878-81	s	RES, CHIP 22 (1005)
R2448	1-220-878-81	s	RES, CHIP 22 (1005)
R2449	1-220-878-81	s	RES, CHIP 22 (1005)

(DVP-45 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R2450	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2451	1-208-935-81	s	RES, CHIP 100K (1005)
R2452	1-208-935-81	s	RES, CHIP 100K (1005)
R2455	1-208-855-81	s	RES, CHIP 47 (1005)
R2456	1-208-855-81	s	RES, CHIP 47 (1005)
R2457	1-208-855-81	s	RES, CHIP 47 (1005)
R2463	1-208-855-81	s	RES, CHIP 47 (1005)
R2464	1-208-855-81	s	RES, CHIP 47 (1005)
R2465	1-208-855-81	s	RES, CHIP 47 (1005)
R2466	1-220-878-81	s	RES, CHIP 22 (1005)
R2467	1-220-878-81	s	RES, CHIP 22 (1005)
R2468	1-208-855-81	s	RES, CHIP 47 (1005)
R2469	1-208-855-81	s	RES, CHIP 47 (1005)
R2470	1-220-878-81	s	RES, CHIP 22 (1005)
R2471	1-220-878-81	s	RES, CHIP 22 (1005)
R2472	1-220-878-81	s	RES, CHIP 22 (1005)
R2473	1-220-878-81	s	RES, CHIP 22 (1005)
R2474	1-220-870-81	s	RES, CHIP 10 (1005)
R2475	1-220-870-81	s	RES, CHIP 10 (1005)
R2476	1-220-878-81	s	RES, CHIP 22 (1005)
R2483	1-220-878-81	s	RES, CHIP 22 (1005)
R2484	1-220-878-81	s	RES, CHIP 22 (1005)
R2485	1-208-855-81	s	RES, CHIP 47 (1005)
R2486	1-208-855-81	s	RES, CHIP 47 (1005)
RB1	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB4	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB5	1-234-382-21	s	RES, NETWORK 220K (1005X4)
RB6	1-234-382-21	s	RES, NETWORK 220K (1005X4)
RB7	1-234-382-21	s	RES, NETWORK 220K (1005X4)
RB200	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB201	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB202	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB203	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB204	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB205	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB300	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB400	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB401	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB402	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB403	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB404	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB405	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB406	1-234-369-21	s	RES, NETWORK 10 (1005X4)
RB407	1-234-369-21	s	RES, NETWORK 10 (1005X4)
RB408	1-234-369-21	s	RES, NETWORK 10 (1005X4)
RB600	1-234-377-21	s	RES, NETWORK 4.7K (1005X4)
RB601	1-234-377-21	s	RES, NETWORK 4.7K (1005X4)
RB800	1-234-380-21	s	RES, NETWORK 47K (1005X4)
RB801	1-234-380-21	s	RES, NETWORK 47K (1005X4)
RB900	1-234-380-21	s	RES, NETWORK 47K (1005X4)
RB901	1-234-380-21	s	RES, NETWORK 47K (1005X4)
RB902	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB903	1-234-380-21	s	RES, NETWORK 47K (1005X4)
RB1000	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1001	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1002	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1003	1-234-378-21	s	RES, NETWORK 10K (1005X4)

(DVP-45 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB1013	1-234-369-21	s	RES, NETWORK 10 (1005X4)
RB1014	1-234-369-21	s	RES, NETWORK 10 (1005X4)
RB1200	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1201	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1207	1-234-369-21	s	RES, NETWORK 10 (1005X4)
RB1208	1-234-369-21	s	RES, NETWORK 10 (1005X4)
RB1400	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1401	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1407	1-234-369-21	s	RES, NETWORK 10 (1005X4)
RB1408	1-234-369-21	s	RES, NETWORK 10 (1005X4)
RB1602	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1603	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1604	1-234-382-21	s	RES, NETWORK 220K (1005X4)
RB1605	1-234-382-21	s	RES, NETWORK 220K (1005X4)
RB1606	1-234-382-21	s	RES, NETWORK 220K (1005X4)
RB1607	1-234-382-21	s	RES, NETWORK 220K (1005X4)
RB1608	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1609	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1700	1-242-963-21	s	RES, NETWORK 33 (1005X4)
RB1701	1-242-963-21	s	RES, NETWORK 33 (1005X4)
RB1702	1-242-963-21	s	RES, NETWORK 33 (1005X4)
RB1703	1-242-963-21	s	RES, NETWORK 33 (1005X4)
RB1704	1-242-963-21	s	RES, NETWORK 33 (1005X4)
RB1705	1-242-963-21	s	RES, NETWORK 33 (1005X4)
RB1706	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1707	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1708	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1709	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1900	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB1901	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB2002	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB2003	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB2100	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB2101	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2106	1-234-378-21	s	RES, NETWORK 10K (1005X4)
S900	1-692-270-41	s	SWITCH, SLIDE
S1900	1-692-270-41	s	SWITCH, SLIDE
S1901	1-771-721-21	s	SWITCH, TACTILE
X900	1-813-511-11	s	OSCILLATOR, CRYSTAL (24MHZ)
X2400	1-813-823-11	s	OSCILLATOR, CRYSTAL
X2401	1-813-824-11	s	OSCILLATOR, CRYSTAL

ENC-118 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1550-453-A	s	MOUNTED CIRCUIT BOARD, ENC-118
C1	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C2	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C3	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
CN113	1-573-290-21	s	PIN, CONNECTOR (1.5MM) (SMD)4P
EN1	1-467-973-21	s	ENCODER, ROTARY

FP-157 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1538-885-A	s	MOUNTED CIRCUIT BOARD, FP-157
BT1	1-756-076-21	s	HOLDER, LITHIUM BATTERY
C1	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C3	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C4	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C5	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C6	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C7	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C8	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C9	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C10	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C11	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C12	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C13	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C14	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C15	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C16	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C17	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C18	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C19	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C20	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C21	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C22	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C23	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C24	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C25	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C26	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C27	1-126-390-21	s	CAP, CHIP ELECT 22MF (4X5.7)
C28	1-126-390-21	s	CAP, CHIP ELECT 22MF (4X5.7)
C29	1-126-390-21	s	CAP, CHIP ELECT 22MF (4X5.7)
C30	1-126-390-21	s	CAP, CHIP ELECT 22MF (4X5.7)
C31	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C33	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C34	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C35	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C36	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C37	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C38	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C39	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C40	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C41	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C42	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C43	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C44	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C45	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C46	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C47	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C48	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C49	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C50	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C51	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C52	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C101	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C102	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C103	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C104	1-164-854-81	s	CAP, CHIP CERAMIC 15PF CH 1005

(FP-157 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C105	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C106	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C107	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C108	1-126-390-21	s	CAP, CHIP ELECT 22MF (4X5.7)
C109	1-126-390-21	s	CAP, CHIP ELECT 22MF (4X5.7)
C110	1-127-950-21	s	CAP, CHIP FILM 0.01MF (2012)
C111	1-127-950-21	s	CAP, CHIP FILM 0.01MF (2012)
C112	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C113	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C114	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C116	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C117	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C118	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C119	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C120	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C121	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C122	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C123	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C126	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C127	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C128	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C129	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C131	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C132	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C201	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C202	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C203	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C204	1-164-854-81	s	CAP, CHIP CERAMIC 15PF CH 1005
C205	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C206	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C207	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C208	1-126-390-21	s	CAP, CHIP ELECT 22MF (4X5.7)
C209	1-126-390-21	s	CAP, CHIP ELECT 22MF (4X5.7)
C301	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C302	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C303	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C304	1-164-854-81	s	CAP, CHIP CERAMIC 15PF CH 1005
C305	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C306	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C307	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C308	1-126-390-21	s	CAP, CHIP ELECT 22MF (4X5.7)
C309	1-126-390-21	s	CAP, CHIP ELECT 22MF (4X5.7)
C310	1-127-950-21	s	CAP, CHIP FILM 0.01MF (2012)
C311	1-127-950-21	s	CAP, CHIP FILM 0.01MF (2012)
C312	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C313	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C314	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C315	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C316	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C317	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C318	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C319	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C320	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C321	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C322	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C323	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C326	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C327	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C331	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)

(FP-157 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C332	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C401	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C402	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C403	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C404	1-164-854-81	s	CAP, CHIP CERAMIC 15PF CH 1005
C405	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C406	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C407	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C408	1-126-390-21	s	CAP, CHIP ELECT 22MF (4X5.7)
C409	1-126-390-21	s	CAP, CHIP ELECT 22MF (4X5.7)
C454	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C455	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C456	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C457	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C458	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C459	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C462	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C463	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C464	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C500	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C501	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C510	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C511	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C512	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C513	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C515	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C516	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C517	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C523	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C524	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C525	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C526	1-164-868-81	s	CAP, CHIP CERAMIC 56PF CH 1005
C527	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C528	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C600	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C601	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C603	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C604	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C607	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C608	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C609	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C610	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C612	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C613	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C614	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C615	1-164-868-81	s	CAP, CHIP CERAMIC 56PF CH 1005
C616	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C617	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C618	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C619	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C620	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C621	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C622	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C701	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C702	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C705	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C706	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C707	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C708	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(FP-157 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C709	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C710	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C711	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C712	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C713	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C714	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C715	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C716	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C717	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C718	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C719	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C720	1-128-590-21	s	CAP, CHIP ELECT 100MF
C721	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C722	1-128-590-21	s	CAP, CHIP ELECT 100MF
C723	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C724	1-128-590-21	s	CAP, CHIP ELECT 100MF
C725	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C726	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C727	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C728	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C729	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C730	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C731	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C735	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C736	1-128-590-21	s	CAP, CHIP ELECT 100MF
C737	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C738	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C739	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C740	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C741	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C742	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C743	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C744	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C745	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C746	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C747	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C748	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C749	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C750	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C751	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C752	1-128-590-21	s	CAP, CHIP ELECT 100MF
C754	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C755	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C756	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C757	1-164-882-81	s	CAP,CHIP CERAMIC 220PF CH 1005
C758	1-164-882-81	s	CAP,CHIP CERAMIC 220PF CH 1005
C759	1-164-882-81	s	CAP,CHIP CERAMIC 220PF CH 1005
C760	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C761	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C762	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C763	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C764	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C765	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C766	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C767	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C768	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C769	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C770	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C771	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)

(FP-157 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C772	1-127-954-21	s	CAP, CHIP FILM 0.047MF (3216)
C773	1-127-954-21	s	CAP, CHIP FILM 0.047MF (3216)
C774	1-127-954-21	s	CAP, CHIP FILM 0.047MF (3216)
C775	1-128-590-21	s	CAP, CHIP ELECT 100MF
C776	1-128-590-21	s	CAP, CHIP ELECT 100MF
C777	1-128-590-21	s	CAP, CHIP ELECT 100MF
C778	1-128-590-21	s	CAP, CHIP ELECT 100MF
C779	1-128-590-21	s	CAP, CHIP ELECT 100MF
C780	1-128-590-21	s	CAP, CHIP ELECT 100MF
C781	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C782	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C783	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C784	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C785	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C786	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C787	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C788	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C789	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C800	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C801	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C802	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C803	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C804	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C805	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C806	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C807	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C808	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C809	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C810	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C811	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C812	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C813	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C814	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C816	1-114-236-21	s	CAP, CERAMIC 22MF B (3225)
C817	1-126-395-21	s	CAP, CHIP ELECT 22MF (5X5.7)
C818	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C820	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C821	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C822	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C823	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C824	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C825	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C827	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C828	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C829	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C830	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C831	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C832	1-126-398-21	s	CAP, CHIP ELECT 4.7MF (4X5.7)
C833	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C834	1-126-395-21	s	CAP, CHIP ELECT 22MF (5X5.7)
C835	1-126-395-21	s	CAP, CHIP ELECT 22MF (5X5.7)
C836	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C837	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C838	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C839	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C840	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C841	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C842	1-104-609-21	s	CAP, CHIP ELECT 100MF (4X5.7)
C843	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)

(FP-157 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C844	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C845	1-114-236-21	s	CAP, CERAMIC 22MF B (3225)
C846	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C847	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C848	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C849	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C850	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C851	1-104-609-21	s	CAP, CHIP ELECT 100MF (4X5.7)
C852	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C854	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C855	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C856	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C857	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C858	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C859	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C860	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C861	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C862	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C863	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C864	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C866	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C867	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C868	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C870	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C871	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C872	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C873	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C875	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C876	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C877	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C879	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C880	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C883	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C884	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C885	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C910	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C911	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C912	1-164-882-81	s	CAP,CHIP CERAMIC 220PF CH 1005
C913	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C914	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C915	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C916	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C917	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C918	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C919	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C920	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C921	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C922	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C923	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C924	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C925	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C926	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C927	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C928	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C929	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C930	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C931	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C932	1-104-609-21	s	CAP, CHIP ELECT 100MF (4X5.7)
C933	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(FP-157 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C934	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C935	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C936	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C937	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C938	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C939	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C940	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C941	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C942	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C943	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C944	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C945	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C947	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C948	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C999	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1000	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C1001	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C1002	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
CN105	1-750-161-51	s	CONNECTOR, FPC 30P
CN106	1-750-161-51	s	CONNECTOR, FPC 30P
CN107	1-750-161-51	s	CONNECTOR, FPC 30P
CN700	1-764-007-21	o	PIN, CONNECTOR (SMD) 12P
CN701	1-569-775-21	o	PIN, CONNECTOR (SMD) 5P
CN702	1-580-756-21	s	PIN, CONNECTOR (SMD) 7P
CN703	1-580-055-21	o	PIN, CONNECTOR (SMD) 2P
CN800	1-794-375-21	s	PIN, CONNECTOR 2P
CN801	1-793-293-51	s	CONNECTOR, FPC 12P
CN802	1-816-928-21	s	PIN, CONNECTOR 22P
CN831	1-573-290-21	s	PIN, CONNECTOR (1.5MM) (SMD)4P
CN850	1-580-057-21	s	PIN, CONNECTOR (SMD) 4P
D1	8-719-989-01	s	DIODE DA221-TL
D2	8-719-989-01	s	DIODE DA221-TL
D3	8-719-989-01	s	DIODE DA221-TL
D4	8-719-989-01	s	DIODE DA221-TL
D101	8-719-991-01	s	DIODE DAP222-TL
D102	8-719-991-01	s	DIODE DAP222-TL
D301	8-719-991-01	s	DIODE DAP222-TL
D302	8-719-991-01	s	DIODE DAP222-TL
D700	8-719-083-59	s	DI UDZSUSTE-174.3B
D701	8-719-083-59	s	DI UDZSUSTE-174.3B
D702	8-719-938-77	s	DIODE SB05-05C-TB-E
D703	8-719-989-04	s	DIODE DAN222-TL
D704	8-719-938-77	s	DIODE SB05-05C-TB-E
D705	8-719-938-77	s	DIODE SB05-05C-TB-E
D706	8-719-938-77	s	DIODE SB05-05C-TB-E
D707	8-719-989-01	s	DIODE DA221-TL
D708	8-719-938-77	s	DIODE SB05-05C-TB-E
D709	8-719-938-77	s	DIODE SB05-05C-TB-E
D710	8-719-938-77	s	DIODE SB05-05C-TB-E
D830	8-719-017-33	s	DIODE 02DZ20-TPH3
D831	8-719-938-77	s	DIODE SB05-05C-TB-E
D832	8-719-938-77	s	DIODE SB05-05C-TB-E
D833	8-719-938-77	s	DIODE SB05-05C-TB-E
D834	8-719-938-77	s	DIODE SB05-05C-TB-E
D835	8-719-938-77	s	DIODE SB05-05C-TB-E
D836	8-719-938-77	s	DIODE SB05-05C-TB-E
D837	8-719-938-77	s	DIODE SB05-05C-TB-E
D838	8-719-938-77	s	DIODE SB05-05C-TB-E

(FP-157 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
D839	8-719-938-77	s	DIODE SB05-05C-TB-E
D840	8-719-991-01	s	DIODE DAP222-TL
D841	8-719-991-01	s	DIODE DAP222-TL
D842	8-719-077-09	s	DIODE CL-196HR-CD-T
D843	8-719-074-31	s	DIODE CL-196YG-CD-T
D844	8-719-074-31	s	DIODE CL-196YG-CD-T
D845	8-719-077-09	s	DIODE CL-196HR-CD-T
D846	6-501-052-02	s	DIODE CL-197HB1-D-T
D847	8-719-989-01	s	DIODE DA221-TL
D848	8-719-989-01	s	DIODE DA221-TL
D849	8-719-989-01	s	DIODE DA221-TL
D912	8-719-991-01	s	DIODE DAP222-TL
D913	8-719-991-01	s	DIODE DAP222-TL
E450	1-535-757-21	s	CHIP, CHECKER
E500	1-535-757-21	s	CHIP, CHECKER
H801	6-600-513-11	s	IC TK60019CS8G0L
IC1	8-759-523-01	s	IC TC74HC4052AFT(EL)
IC2	8-759-523-01	s	IC TC74HC4052AFT(EL)
IC3	8-759-523-01	s	IC TC74HC4052AFT(EL)
IC4	8-759-523-01	s	IC TC74HC4052AFT(EL)
IC5	8-759-144-75	s	IC UPC4572G2-E2
IC6	8-759-144-75	s	IC UPC4572G2-E2
IC7	8-759-327-01	s	IC NJM062V(TE2)
IC8	8-759-523-01	s	IC TC74HC4052AFT(EL)
IC101	8-759-144-75	s	IC UPC4572G2-E2
IC102	8-759-697-17	s	IC AK5383VF-E2
IC103	6-707-882-01	o	IC TC74VHC74FT(EKJ)
IC201	8-759-144-75	s	IC UPC4572G2-E2
IC301	8-759-144-75	s	IC UPC4572G2-E2
IC302	8-759-697-17	s	IC AK5383VF-E2
IC401	8-759-144-75	s	IC UPC4572G2-E2
IC451	8-759-549-15	s	IC SN74LV245APWR
IC453	6-701-111-01	s	IC AK4382AVT-E2
IC454	6-706-481-01	s	IC TC7SET32FU(T5RSOJF)
IC455	6-706-481-01	s	IC TC7SET32FU(T5RSOJF)
IC456	6-706-481-01	s	IC TC7SET32FU(T5RSOJF)
IC460	8-759-698-31	s	IC TC7WH74FK(TE85R)
IC461	8-759-680-48	s	IC TC7WH157FK(TE85R)
IC520	8-759-422-21	s	IC NJM4580V(TE2)
IC521	8-759-422-21	s	IC NJM4580V(TE2)
IC620	8-759-422-21	s	IC NJM4580V(TE2)
IC621	8-759-422-21	s	IC NJM4580V(TE2)
IC622	6-701-716-01	s	IC M5203AFP600D
IC701	6-702-481-01	s	IC PCA9555DB-118
IC702	8-759-185-42	s	IC LM4040AIM3-2.5
IC703	8-759-669-73	s	IC TL082CPWR
IC704	8-759-523-01	s	IC TC74HC4052AFT(EL)
IC705	8-759-523-01	s	IC TC74HC4052AFT(EL)
IC706	6-704-960-01	s	IC NJM2172V(TE2)
IC707	6-704-960-01	s	IC NJM2172V(TE2)
IC708	8-759-431-97	s	IC NJM386M(TE2)
IC709	8-759-431-97	s	IC NJM386M(TE2)
IC710	8-759-431-97	s	IC NJM386M(TE2)
IC711	6-707-083-01	s	IC TK70008SCL-G
IC750	8-759-422-21	s	IC NJM4580V(TE2)
IC800	6-706-481-01	s	IC TC7SET32FU(T5RSOJF)
IC801	6-706-481-01	s	IC TC7SET32FU(T5RSOJF)

(FP-157 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC802	6-706-481-01	s	IC TC7SET32FU(T5RSOJF)
IC803	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC804	6-706-481-01	s	IC TC7SET32FU(T5RSOJF)
IC805	6-706-481-01	s	IC TC7SET32FU(T5RSOJF)
IC806	6-704-440-01	s	IC UPD7225GB-3B7-A
IC807	8-759-185-42	s	IC LM4040AIM3-2.5
IC808	8-759-327-01	s	IC NJM062V(TE2)
IC809	8-759-444-93	s	IC RH5RL33AA-T1-FA
IC812	8-759-698-08	s	IC SN74CBTLV1G125DCKR
IC813	8-759-698-08	s	IC SN74CBTLV1G125DCKR
IC814	8-759-698-08	s	IC SN74CBTLV1G125DCKR
IC815	8-759-698-08	s	IC SN74CBTLV1G125DCKR
IC816	8-759-698-08	s	IC SN74CBTLV1G125DCKR
IC830	6-711-555-01	o	IC NJM2831F08(TE1)
IC831	8-759-477-41	s	IC RH5RL53AA-T1-FA
IC832	8-759-442-54	s	IC RH5RL50AA-T1-FA
IC833	6-704-238-01	s	IC S-812C30AUA-C2KT2G
IC834	8-759-444-93	s	IC RH5RL33AA-T1-FA
IC835	6-704-238-01	s	IC S-812C30AUA-C2KT2G
IC836	8-759-444-93	s	IC RH5RL33AA-T1-FA
IC837	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC838	8-759-337-40	s	IC NJM2904V(TE2)
IC839	8-759-598-35	s	IC NJM2119M(TE2)
IC840	8-759-337-40	s	IC NJM2904V(TE2)
IC842	8-759-349-55	s	IC RH5VL25AA-T1-FA
IC843	8-759-669-69	s	IC TLC7733IPWR-12
IC844	8-759-337-40	s	IC NJM2904V(TE2)
IC845	6-711-555-01	o	IC NJM2831F08(TE1)
IC847	8-759-698-08	s	IC SN74CBTLV1G125DCKR
IC848	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC849	6-706-484-01	s	IC TC7SH04FU(T5RSOYJF)
IC850	6-706-484-01	s	IC TC7SH04FU(T5RSOYJF)
IC851	6-706-481-01	s	IC TC7SET32FU(T5RSOJF)
IC852	6-707-882-01	o	IC TC74VHC74FT(EKJ)
IC908	6-708-478-01	s	IC RX-8025NB
IC913	6-710-018-01	s	IC CAT24C02WI-GT3
IC914	8-759-337-40	s	IC NJM2904V(TE2)
IC916	6-714-004-01	s	IC PCA9564PW-T
IC917	6-714-004-01	s	IC PCA9564PW-T
IC918	6-714-004-01	s	IC PCA9564PW-T
IC919	8-759-698-08	s	IC SN74CBTLV1G125DCKR
IC920	8-759-698-08	s	IC SN74CBTLV1G125DCKR
IC922	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC923	6-702-481-01	s	IC PCA9555DB-118
IC924	6-702-481-01	s	IC PCA9555DB-118
IC925	6-706-481-01	s	IC TC7SET32FU(T5RSOJF)
IC926	6-707-868-01	s	IC TC74VHC138FT(EKJ)
IC927	8-759-675-54	s	IC TC7W53FK(TE85R)
IC928	8-759-675-54	s	IC TC7W53FK(TE85R)
IC1000	8-759-655-22	s	IC TC7WH34FK(TE85R)
L701	1-469-549-21	s	INDUCTOR, CHIP 1.0UH (LB2016)
L702	1-469-549-21	s	INDUCTOR, CHIP 1.0UH (LB2016)
L703	1-469-549-21	s	INDUCTOR, CHIP 1.0UH (LB2016)
L704	1-469-549-21	s	INDUCTOR, CHIP 1.0UH (LB2016)
L800	1-469-549-21	s	INDUCTOR, CHIP 1.0UH (LB2016)
L801	1-469-549-21	s	INDUCTOR, CHIP 1.0UH (LB2016)
L802	1-469-549-21	s	INDUCTOR, CHIP 1.0UH (LB2016)
L803	1-469-549-21	s	INDUCTOR, CHIP 1.0UH (LB2016)
L804	1-469-549-21	s	INDUCTOR, CHIP 1.0UH (LB2016)

(FP-157 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
L830	1-469-549-21	s	INDUCTOR, CHIP 1.0UH (LB2016)
L831	1-469-549-21	s	INDUCTOR, CHIP 1.0UH (LB2016)
L832	1-469-549-21	s	INDUCTOR, CHIP 1.0UH (LB2016)
L999	1-469-549-21	s	INDUCTOR, CHIP 1.0UH (LB2016)
L1000	1-469-549-21	s	INDUCTOR, CHIP 1.0UH (LB2016)
L1001	1-469-549-21	s	INDUCTOR, CHIP 1.0UH (LB2016)
L1002	1-469-549-21	s	INDUCTOR, CHIP 1.0UH (LB2016)
ND800	1-805-945-11	s	PANEL, LCD
Q101	8-729-013-28	s	TRANSISTOR HN1B01FU-TE85R
Q102	8-729-013-28	s	TRANSISTOR HN1B01FU-TE85R
Q103	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q104	8-729-013-28	s	TRANSISTOR HN1B01FU-TE85R
Q105	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q106	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q107	8-729-054-99	s	TRANSISTOR SI4559EY-T1
Q201	8-729-013-28	s	TRANSISTOR HN1B01FU-TE85R
Q202	8-729-013-28	s	TRANSISTOR HN1B01FU-TE85R
Q204	8-729-013-28	s	TRANSISTOR HN1B01FU-TE85R
Q301	8-729-013-28	s	TRANSISTOR HN1B01FU-TE85R
Q302	8-729-013-28	s	TRANSISTOR HN1B01FU-TE85R
Q303	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q304	8-729-013-28	s	TRANSISTOR HN1B01FU-TE85R
Q305	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q306	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q307	8-729-054-99	s	TRANSISTOR SI4559EY-T1
Q401	8-729-013-28	s	TRANSISTOR HN1B01FU-TE85R
Q402	8-729-013-28	s	TRANSISTOR HN1B01FU-TE85R
Q404	8-729-013-28	s	TRANSISTOR HN1B01FU-TE85R
Q503	8-729-013-28	s	TRANSISTOR HN1B01FU-TE85R
Q504	8-729-013-28	s	TRANSISTOR HN1B01FU-TE85R
Q505	8-729-013-28	s	TRANSISTOR HN1B01FU-TE85R
Q603	8-729-013-28	s	TRANSISTOR HN1B01FU-TE85R
Q604	8-729-013-28	s	TRANSISTOR HN1B01FU-TE85R
Q605	8-729-013-28	s	TRANSISTOR HN1B01FU-TE85R
Q700	6-550-631-01	s	TRANSISTOR 2SA1797-T100-Q
Q701	6-550-632-01	s	TRANSISTOR 2SC4672-T100-Q
Q702	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q703	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q704	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q705	8-729-013-37	s	TRANSISTOR 2SC4213-AB-TE85L
Q706	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q707	8-729-013-37	s	TRANSISTOR 2SC4213-AB-TE85L
Q708	8-729-013-37	s	TRANSISTOR 2SC4213-AB-TE85L
Q709	8-729-013-37	s	TRANSISTOR 2SC4213-AB-TE85L
Q710	8-729-013-37	s	TRANSISTOR 2SC4213-AB-TE85L
Q711	6-551-041-01	s	TRANSISTOR RN4904(T5RSONY,D,F)
Q712	6-551-041-01	s	TRANSISTOR RN4904(T5RSONY,D,F)
Q713	6-551-041-01	s	TRANSISTOR RN4904(T5RSONY,D,F)
Q714	8-729-013-37	s	TRANSISTOR 2SC4213-AB-TE85L
Q715	8-729-013-37	s	TRANSISTOR 2SC4213-AB-TE85L
Q716	8-729-013-37	s	TRANSISTOR 2SC4213-AB-TE85L
Q717	8-729-013-37	s	TRANSISTOR 2SC4213-AB-TE85L
Q718	8-729-013-37	s	TRANSISTOR 2SC4213-AB-TE85L
Q720	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q721	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q722	8-729-013-37	s	TRANSISTOR 2SC4213-AB-TE85L
Q723	8-729-013-37	s	TRANSISTOR 2SC4213-AB-TE85L
Q724	8-729-013-37	s	TRANSISTOR 2SC4213-AB-TE85L

(FP-157 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
Q800	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q801	6-551-265-01	s	TRANSISTOR SI2307BDS-T1
Q802	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q803	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q829	6-550-832-01	s	TRANSISTOR SI2301BDS-T1
Q830	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q831	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q832	6-551-265-01	s	TRANSISTOR SI2307BDS-T1
Q833	6-551-265-01	s	TRANSISTOR SI2307BDS-T1
Q834	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q835	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q836	6-550-832-01	s	TRANSISTOR SI2301BDS-T1
Q837	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q838	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q839	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q840	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q841	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q842	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q843	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q844	6-551-265-01	s	TRANSISTOR SI2307BDS-T1
Q847	6-551-526-01	o	TRANSISTOR RJU003N03T1
Q848	6-551-526-01	o	TRANSISTOR RJU003N03T1
Q910	6-551-266-01	s	TRANSISTOR SI2304BDS-T1
Q911	6-551-266-01	s	TRANSISTOR SI2304BDS-T1
Q912	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q913	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q914	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q915	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q916	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q917	8-729-929-09	s	TRANSISTOR DTC123JE-TL
R1	1-208-935-81	s	RES, CHIP 100K (1005)
R2	1-208-935-81	s	RES, CHIP 100K (1005)
R3	1-208-935-81	s	RES, CHIP 100K (1005)
R4	1-208-935-81	s	RES, CHIP 100K (1005)
R5	1-208-935-81	s	RES, CHIP 100K (1005)
R6	1-208-935-81	s	RES, CHIP 100K (1005)
R7	1-208-935-81	s	RES, CHIP 100K (1005)
R8	1-208-935-81	s	RES, CHIP 100K (1005)
R9	1-208-935-81	s	RES, CHIP 100K (1005)
R10	1-208-935-81	s	RES, CHIP 100K (1005)
R11	1-208-911-81	s	RES, CHIP 10K (1005)
R12	1-208-939-81	s	RES, CHIP 150K (1005)
R13	1-208-903-81	s	RES, CHIP 4.7K (1005)
R14	1-208-911-81	s	RES, CHIP 10K (1005)
R15	1-208-895-81	s	RES, CHIP 2.2K (1005)
R16	1-208-895-81	s	RES, CHIP 2.2K (1005)
R17	1-208-895-81	s	RES, CHIP 2.2K (1005)
R18	1-208-895-81	s	RES, CHIP 2.2K (1005)
R19	1-208-895-81	s	RES, CHIP 2.2K (1005)
R20	1-208-895-81	s	RES, CHIP 2.2K (1005)
R21	1-208-895-81	s	RES, CHIP 2.2K (1005)
R22	1-208-895-81	s	RES, CHIP 2.2K (1005)
R23	1-208-931-81	s	RES, CHIP 68K (1005)
R24	1-208-931-81	s	RES, CHIP 68K (1005)
R25	1-208-931-81	s	RES, CHIP 68K (1005)
R26	1-208-931-81	s	RES, CHIP 68K (1005)
R27	1-208-895-81	s	RES, CHIP 2.2K (1005)
R28	1-208-895-81	s	RES, CHIP 2.2K (1005)
R29	1-208-895-81	s	RES, CHIP 2.2K (1005)

(FP-157 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R30	1-208-895-81	s	RES, CHIP 2.2K (1005)
R31	1-208-895-81	s	RES, CHIP 2.2K (1005)
R32	1-208-911-81	s	RES, CHIP 10K (1005)
R33	1-208-895-81	s	RES, CHIP 2.2K (1005)
R34	1-208-931-81	s	RES, CHIP 68K (1005)
R35	1-208-863-81	s	RES, CHIP 100 (1005)
R36	1-208-895-81	s	RES, CHIP 2.2K (1005)
R37	1-208-931-81	s	RES, CHIP 68K (1005)
R38	1-208-895-81	s	RES, CHIP 2.2K (1005)
R39	1-208-931-81	s	RES, CHIP 68K (1005)
R40	1-208-895-81	s	RES, CHIP 2.2K (1005)
R41	1-208-931-81	s	RES, CHIP 68K (1005)
R42	1-208-919-81	s	RES, CHIP 22K (1005)
R43	1-208-919-81	s	RES, CHIP 22K (1005)
R44	1-208-919-81	s	RES, CHIP 22K (1005)
R45	1-208-919-81	s	RES, CHIP 22K (1005)
R46	1-208-887-81	s	RES, CHIP 1.0K (1005)
R47	1-208-911-81	s	RES, CHIP 10K (1005)
R48	1-208-903-81	s	RES, CHIP 4.7K (1005)
R49	1-208-911-81	s	RES, CHIP 10K (1005)
R50	1-208-903-81	s	RES, CHIP 4.7K (1005)
R51	1-208-911-81	s	RES, CHIP 10K (1005)
R52	1-208-903-81	s	RES, CHIP 4.7K (1005)
R53	1-208-911-81	s	RES, CHIP 10K (1005)
R54	1-208-903-81	s	RES, CHIP 4.7K (1005)
R55	1-208-911-81	s	RES, CHIP 10K (1005)
R56	1-208-911-81	s	RES, CHIP 10K (1005)
R57	1-208-911-81	s	RES, CHIP 10K (1005)
R58	1-208-911-81	s	RES, CHIP 10K (1005)
R59	1-208-911-81	s	RES, CHIP 10K (1005)
R60	1-208-903-81	s	RES, CHIP 4.7K (1005)
R61	1-208-911-81	s	RES, CHIP 10K (1005)
R62	1-208-903-81	s	RES, CHIP 4.7K (1005)
R63	1-208-863-81	s	RES, CHIP 100 (1005)
R64	1-208-863-81	s	RES, CHIP 100 (1005)
R65	1-208-863-81	s	RES, CHIP 100 (1005)
R66	1-208-863-81	s	RES, CHIP 100 (1005)
R69	1-208-935-81	s	RES, CHIP 100K (1005)
R70	1-208-935-81	s	RES, CHIP 100K (1005)
R103	1-208-911-81	s	RES, CHIP 10K (1005)
R104	1-208-903-81	s	RES, CHIP 4.7K (1005)
R106	1-208-903-81	s	RES, CHIP 4.7K (1005)
R107	1-220-878-81	s	RES, CHIP 22 (1005)
R109	1-208-911-81	s	RES, CHIP 10K (1005)
R110	1-208-927-81	s	RES, CHIP 47K (1005)
R112	1-208-911-81	s	RES, CHIP 10K (1005)
R113	1-208-899-81	s	RES, CHIP 3.3K (1005)
R114	1-208-903-81	s	RES, CHIP 4.7K (1005)
R115	1-208-911-81	s	RES, CHIP 10K (1005)
R116	1-208-927-81	s	RES, CHIP 47K (1005)
R124	1-208-911-81	s	RES, CHIP 10K (1005)
R125	1-208-927-81	s	RES, CHIP 47K (1005)
R126	1-220-878-81	s	RES, CHIP 22 (1005)
R127	1-208-911-81	s	RES, CHIP 10K (1005)
R128	1-208-927-81	s	RES, CHIP 47K (1005)
R132	1-208-895-81	s	RES, CHIP 2.2K (1005)
R134	1-208-895-81	s	RES, CHIP 2.2K (1005)
R135	1-208-919-81	s	RES, CHIP 22K (1005)
R136	1-208-919-81	s	RES, CHIP 22K (1005)

(FP-157 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R137	1-208-927-81	s	RES, CHIP 47K (1005)
R138	1-208-927-81	s	RES, CHIP 47K (1005)
R139	1-220-878-81	s	RES, CHIP 22 (1005)
R140	1-220-878-81	s	RES, CHIP 22 (1005)
R141	1-208-935-81	s	RES, CHIP 100K (1005)
R142	1-220-878-81	s	RES, CHIP 22 (1005)
R143	1-220-878-81	s	RES, CHIP 22 (1005)
R144	1-208-935-81	s	RES, CHIP 100K (1005)
R145	1-208-927-81	s	RES, CHIP 47K (1005)
R146	1-208-911-81	s	RES, CHIP 10K (1005)
R147	1-208-911-81	s	RES, CHIP 10K (1005)
R148	1-208-927-81	s	RES, CHIP 47K (1005)
R203	1-208-911-81	s	RES, CHIP 10K (1005)
R204	1-208-903-81	s	RES, CHIP 4.7K (1005)
R206	1-208-903-81	s	RES, CHIP 4.7K (1005)
R207	1-220-878-81	s	RES, CHIP 22 (1005)
R209	1-208-911-81	s	RES, CHIP 10K (1005)
R210	1-208-927-81	s	RES, CHIP 47K (1005)
R212	1-208-911-81	s	RES, CHIP 10K (1005)
R213	1-208-899-81	s	RES, CHIP 3.3K (1005)
R214	1-208-903-81	s	RES, CHIP 4.7K (1005)
R215	1-208-911-81	s	RES, CHIP 10K (1005)
R216	1-208-927-81	s	RES, CHIP 47K (1005)
R224	1-208-911-81	s	RES, CHIP 10K (1005)
R225	1-208-927-81	s	RES, CHIP 47K (1005)
R226	1-220-878-81	s	RES, CHIP 22 (1005)
R227	1-208-911-81	s	RES, CHIP 10K (1005)
R228	1-208-927-81	s	RES, CHIP 47K (1005)
R232	1-208-895-81	s	RES, CHIP 2.2K (1005)
R234	1-208-895-81	s	RES, CHIP 2.2K (1005)
R235	1-208-919-81	s	RES, CHIP 22K (1005)
R236	1-208-919-81	s	RES, CHIP 22K (1005)
R237	1-208-927-81	s	RES, CHIP 47K (1005)
R238	1-208-927-81	s	RES, CHIP 47K (1005)
R239	1-220-878-81	s	RES, CHIP 22 (1005)
R240	1-220-878-81	s	RES, CHIP 22 (1005)
R303	1-208-911-81	s	RES, CHIP 10K (1005)
R304	1-208-903-81	s	RES, CHIP 4.7K (1005)
R306	1-208-903-81	s	RES, CHIP 4.7K (1005)
R307	1-220-878-81	s	RES, CHIP 22 (1005)
R309	1-208-911-81	s	RES, CHIP 10K (1005)
R310	1-208-927-81	s	RES, CHIP 47K (1005)
R312	1-208-911-81	s	RES, CHIP 10K (1005)
R313	1-208-899-81	s	RES, CHIP 3.3K (1005)
R314	1-208-903-81	s	RES, CHIP 4.7K (1005)
R315	1-208-911-81	s	RES, CHIP 10K (1005)
R316	1-208-927-81	s	RES, CHIP 47K (1005)
R324	1-208-911-81	s	RES, CHIP 10K (1005)
R325	1-208-927-81	s	RES, CHIP 47K (1005)
R326	1-220-878-81	s	RES, CHIP 22 (1005)
R327	1-208-911-81	s	RES, CHIP 10K (1005)
R328	1-208-927-81	s	RES, CHIP 47K (1005)
R332	1-208-895-81	s	RES, CHIP 2.2K (1005)
R334	1-208-895-81	s	RES, CHIP 2.2K (1005)
R335	1-208-919-81	s	RES, CHIP 22K (1005)
R336	1-208-919-81	s	RES, CHIP 22K (1005)
R337	1-208-927-81	s	RES, CHIP 47K (1005)
R338	1-208-927-81	s	RES, CHIP 47K (1005)
R339	1-220-878-81	s	RES, CHIP 22 (1005)

(FP-157 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R340	1-220-878-81	s	RES, CHIP 22 (1005)
R341	1-208-935-81	s	RES, CHIP 100K (1005)
R342	1-220-878-81	s	RES, CHIP 22 (1005)
R343	1-220-878-81	s	RES, CHIP 22 (1005)
R344	1-208-935-81	s	RES, CHIP 100K (1005)
R345	1-208-927-81	s	RES, CHIP 47K (1005)
R346	1-208-911-81	s	RES, CHIP 10K (1005)
R347	1-208-911-81	s	RES, CHIP 10K (1005)
R348	1-208-927-81	s	RES, CHIP 47K (1005)
R403	1-208-911-81	s	RES, CHIP 10K (1005)
R404	1-208-903-81	s	RES, CHIP 4.7K (1005)
R406	1-208-903-81	s	RES, CHIP 4.7K (1005)
R407	1-220-878-81	s	RES, CHIP 22 (1005)
R409	1-208-911-81	s	RES, CHIP 10K (1005)
R410	1-208-927-81	s	RES, CHIP 47K (1005)
R412	1-208-911-81	s	RES, CHIP 10K (1005)
R413	1-208-899-81	s	RES, CHIP 3.3K (1005)
R414	1-208-903-81	s	RES, CHIP 4.7K (1005)
R415	1-208-911-81	s	RES, CHIP 10K (1005)
R416	1-208-927-81	s	RES, CHIP 47K (1005)
R424	1-208-911-81	s	RES, CHIP 10K (1005)
R425	1-208-927-81	s	RES, CHIP 47K (1005)
R426	1-220-878-81	s	RES, CHIP 22 (1005)
R427	1-208-911-81	s	RES, CHIP 10K (1005)
R428	1-208-927-81	s	RES, CHIP 47K (1005)
R430	1-208-895-81	s	RES, CHIP 2.2K (1005)
R431	1-208-895-81	s	RES, CHIP 2.2K (1005)
R432	1-208-895-81	s	RES, CHIP 2.2K (1005)
R433	1-208-899-81	s	RES, CHIP 3.3K (1005)
R434	1-208-895-81	s	RES, CHIP 2.2K (1005)
R435	1-208-919-81	s	RES, CHIP 22K (1005)
R436	1-208-919-81	s	RES, CHIP 22K (1005)
R437	1-208-927-81	s	RES, CHIP 47K (1005)
R438	1-208-927-81	s	RES, CHIP 47K (1005)
R439	1-220-878-81	s	RES, CHIP 22 (1005)
R440	1-220-878-81	s	RES, CHIP 22 (1005)
R441	1-208-895-81	s	RES, CHIP 2.2K (1005)
R442	1-208-895-81	s	RES, CHIP 2.2K (1005)
R444	1-208-899-81	s	RES, CHIP 3.3K (1005)
R446	1-208-899-81	s	RES, CHIP 3.3K (1005)
R448	1-208-899-81	s	RES, CHIP 3.3K (1005)
R451	1-208-935-81	s	RES, CHIP 100K (1005)
R452	1-208-935-81	s	RES, CHIP 100K (1005)
R454	1-208-919-81	s	RES, CHIP 22K (1005)
R457	1-208-919-81	s	RES, CHIP 22K (1005)
R459	1-208-919-81	s	RES, CHIP 22K (1005)
R461	1-220-878-81	s	RES, CHIP 22 (1005)
R462	1-220-878-81	s	RES, CHIP 22 (1005)
R464	1-208-919-81	s	RES, CHIP 22K (1005)
R465	1-208-935-81	s	RES, CHIP 100K (1005)
R466	1-208-919-81	s	RES, CHIP 22K (1005)
R467	1-208-943-81	s	RES, CHIP 220K (1005)
R500	1-208-891-81	s	RES, CHIP 1.5K (1005)
R501	1-208-887-81	s	RES, CHIP 1.0K (1005)
R502	1-208-891-81	s	RES, CHIP 1.5K (1005)
R503	1-208-887-81	s	RES, CHIP 1.0K (1005)
R504	1-208-883-81	s	RES, CHIP 680 (1005)
R505	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R506	1-208-899-81	s	RES, CHIP 3.3K (1005)

(FP-157 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R507	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R508	1-208-883-81	s	RES, CHIP 680 (1005)
R510	1-208-899-81	s	RES, CHIP 3.3K (1005)
R511	1-208-899-81	s	RES, CHIP 3.3K (1005)
R512	1-208-895-81	s	RES, CHIP 2.2K (1005)
R513	1-208-887-81	s	RES, CHIP 1.0K (1005)
R514	1-208-887-81	s	RES, CHIP 1.0K (1005)
R515	1-208-887-81	s	RES, CHIP 1.0K (1005)
R516	1-208-887-81	s	RES, CHIP 1.0K (1005)
R517	1-208-899-81	s	RES, CHIP 3.3K (1005)
R518	1-208-895-81	s	RES, CHIP 2.2K (1005)
R519	1-208-895-81	s	RES, CHIP 2.2K (1005)
R520	1-220-882-81	s	RES, CHIP 33 (1005)
R521	1-220-882-81	s	RES, CHIP 33 (1005)
R522	1-220-882-81	s	RES, CHIP 33 (1005)
R523	1-220-882-81	s	RES, CHIP 33 (1005)
R524	1-220-882-81	s	RES, CHIP 33 (1005)
R525	1-220-882-81	s	RES, CHIP 33 (1005)
R526	1-220-882-81	s	RES, CHIP 33 (1005)
R527	1-220-882-81	s	RES, CHIP 33 (1005)
R539	1-208-911-81	s	RES, CHIP 10K (1005)
R540	1-208-891-81	s	RES, CHIP 1.5K (1005)
R541	1-208-891-81	s	RES, CHIP 1.5K (1005)
R542	1-220-882-81	s	RES, CHIP 33 (1005)
R543	1-208-911-81	s	RES, CHIP 10K (1005)
R544	1-208-875-81	s	RES, CHIP 330 (1005)
R545	1-220-878-81	s	RES, CHIP 22 (1005)
R546	1-208-911-81	s	RES, CHIP 10K (1005)
R547	1-208-927-81	s	RES, CHIP 47K (1005)
R548	1-208-911-81	s	RES, CHIP 10K (1005)
R549	1-208-891-81	s	RES, CHIP 1.5K (1005)
R550	1-208-891-81	s	RES, CHIP 1.5K (1005)
R551	1-220-870-81	s	RES, CHIP 10 (1005)
R552	1-208-911-81	s	RES, CHIP 10K (1005)
R553	1-208-927-81	s	RES, CHIP 47K (1005)
R554	1-208-911-81	s	RES, CHIP 10K (1005)
R555	1-208-911-81	s	RES, CHIP 10K (1005)
R556	1-208-927-81	s	RES, CHIP 47K (1005)
R557	1-208-887-81	s	RES, CHIP 1.0K (1005)
R558	1-208-887-81	s	RES, CHIP 1.0K (1005)
R559	1-208-891-81	s	RES, CHIP 1.5K (1005)
R560	1-208-907-81	s	RES, CHIP 6.8K (1005)
R561	1-208-887-81	s	RES, CHIP 1.0K (1005)
R562	1-220-882-81	s	RES, CHIP 33 (1005)
R563	1-208-903-81	s	RES, CHIP 4.7K (1005)
R564	1-208-871-81	s	RES, CHIP 220 (1005)
R565	1-208-875-81	s	RES, CHIP 330 (1005)
R566	1-208-903-81	s	RES, CHIP 4.7K (1005)
R600	1-208-891-81	s	RES, CHIP 1.5K (1005)
R601	1-208-887-81	s	RES, CHIP 1.0K (1005)
R602	1-208-891-81	s	RES, CHIP 1.5K (1005)
R603	1-208-887-81	s	RES, CHIP 1.0K (1005)
R604	1-208-899-81	s	RES, CHIP 3.3K (1005)
R605	1-208-899-81	s	RES, CHIP 3.3K (1005)
R606	1-208-899-81	s	RES, CHIP 3.3K (1005)
R607	1-208-895-81	s	RES, CHIP 2.2K (1005)
R608	1-208-887-81	s	RES, CHIP 1.0K (1005)
R609	1-208-887-81	s	RES, CHIP 1.0K (1005)
R610	1-208-887-81	s	RES, CHIP 1.0K (1005)

(FP-157 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R611	1-208-887-81	s	RES, CHIP 1.0K (1005)
R612	1-208-899-81	s	RES, CHIP 3.3K (1005)
R613	1-208-895-81	s	RES, CHIP 2.2K (1005)
R614	1-208-895-81	s	RES, CHIP 2.2K (1005)
R634	1-208-911-81	s	RES, CHIP 10K (1005)
R635	1-208-891-81	s	RES, CHIP 1.5K (1005)
R636	1-208-891-81	s	RES, CHIP 1.5K (1005)
R637	1-208-911-81	s	RES, CHIP 10K (1005)
R638	1-220-882-81	s	RES, CHIP 33 (1005)
R639	1-208-875-81	s	RES, CHIP 330 (1005)
R640	1-220-878-81	s	RES, CHIP 22 (1005)
R641	1-208-911-81	s	RES, CHIP 10K (1005)
R642	1-208-927-81	s	RES, CHIP 47K (1005)
R643	1-208-911-81	s	RES, CHIP 10K (1005)
R644	1-208-891-81	s	RES, CHIP 1.5K (1005)
R645	1-208-891-81	s	RES, CHIP 1.5K (1005)
R646	1-220-870-81	s	RES, CHIP 10 (1005)
R647	1-208-911-81	s	RES, CHIP 10K (1005)
R648	1-208-927-81	s	RES, CHIP 47K (1005)
R649	1-208-911-81	s	RES, CHIP 10K (1005)
R650	1-208-911-81	s	RES, CHIP 10K (1005)
R651	1-208-927-81	s	RES, CHIP 47K (1005)
R652	1-208-887-81	s	RES, CHIP 1.0K (1005)
R653	1-208-887-81	s	RES, CHIP 1.0K (1005)
R654	1-208-891-81	s	RES, CHIP 1.5K (1005)
R655	1-208-907-81	s	RES, CHIP 6.8K (1005)
R656	1-208-887-81	s	RES, CHIP 1.0K (1005)
R657	1-220-882-81	s	RES, CHIP 33 (1005)
R658	1-208-903-81	s	RES, CHIP 4.7K (1005)
R659	1-208-871-81	s	RES, CHIP 220 (1005)
R660	1-208-875-81	s	RES, CHIP 330 (1005)
R661	1-208-903-81	s	RES, CHIP 4.7K (1005)
R662	1-220-878-81	s	RES, CHIP 22 (1005)
R663	1-220-878-81	s	RES, CHIP 22 (1005)
R664	1-220-878-81	s	RES, CHIP 22 (1005)
R665	1-208-883-81	s	RES, CHIP 680 (1005)
R666	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R667	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R668	1-208-883-81	s	RES, CHIP 680 (1005)
R669	1-208-895-81	s	RES, CHIP 2.2K (1005)
R670	1-208-935-81	s	RES, CHIP 100K (1005)
R671	1-208-895-81	s	RES, CHIP 2.2K (1005)
R700	1-208-935-81	s	RES, CHIP 100K (1005)
R701	1-208-935-81	s	RES, CHIP 100K (1005)
R702	1-208-927-81	s	RES, CHIP 47K (1005)
R703	1-208-903-81	s	RES, CHIP 4.7K (1005)
R704	1-208-887-81	s	RES, CHIP 1.0K (1005)
R705	1-208-919-81	s	RES, CHIP 22K (1005)
R706	1-208-911-81	s	RES, CHIP 10K (1005)
R707	1-208-915-81	s	RES, CHIP 15K (1005)
R708	1-208-903-81	s	RES, CHIP 4.7K (1005)
R709	1-208-935-81	s	RES, CHIP 100K (1005)
R710	1-208-935-81	s	RES, CHIP 100K (1005)
R711	1-208-927-81	s	RES, CHIP 47K (1005)
R712	1-208-911-81	s	RES, CHIP 10K (1005)
R713	1-208-903-81	s	RES, CHIP 4.7K (1005)
R714	1-208-911-81	s	RES, CHIP 10K (1005)
R715	1-208-863-81	s	RES, CHIP 100 (1005)
R718	1-208-935-81	s	RES, CHIP 100K (1005)

(FP-157 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R719	1-208-871-81	s	RES, CHIP 220 (1005)
R720	1-208-887-81	s	RES, CHIP 1.0K (1005)
R721	1-208-887-81	s	RES, CHIP 1.0K (1005)
R722	1-208-927-81	s	RES, CHIP 47K (1005)
R723	1-208-927-81	s	RES, CHIP 47K (1005)
R724	1-208-899-81	s	RES, CHIP 3.3K (1005)
R725	1-208-935-81	s	RES, CHIP 100K (1005)
R726	1-208-911-81	s	RES, CHIP 10K (1005)
R727	1-208-903-81	s	RES, CHIP 4.7K (1005)
R728	1-208-903-81	s	RES, CHIP 4.7K (1005)
R729	1-208-919-81	s	RES, CHIP 22K (1005)
R730	1-208-903-81	s	RES, CHIP 4.7K (1005)
R731	1-208-903-81	s	RES, CHIP 4.7K (1005)
R732	1-208-911-81	s	RES, CHIP 10K (1005)
R733	1-208-895-81	s	RES, CHIP 2.2K (1005)
R734	1-208-895-81	s	RES, CHIP 2.2K (1005)
R735	1-208-935-81	s	RES, CHIP 100K (1005)
R736	1-208-863-81	s	RES, CHIP 100 (1005)
R737	1-208-895-81	s	RES, CHIP 2.2K (1005)
R738	1-208-903-81	s	RES, CHIP 4.7K (1005)
R740	1-208-863-81	s	RES, CHIP 100 (1005)
R741	1-208-863-81	s	RES, CHIP 100 (1005)
R742	1-208-863-81	s	RES, CHIP 100 (1005)
R743	1-208-895-81	s	RES, CHIP 2.2K (1005)
R744	1-208-895-81	s	RES, CHIP 2.2K (1005)
R745	1-208-895-81	s	RES, CHIP 2.2K (1005)
R746	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R747	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R749	1-208-911-81	s	RES, CHIP 10K (1005)
R750	1-208-911-81	s	RES, CHIP 10K (1005)
R751	1-208-911-81	s	RES, CHIP 10K (1005)
R752	1-208-911-81	s	RES, CHIP 10K (1005)
R753	1-208-915-81	s	RES, CHIP 15K (1005)
R754	1-208-863-81	s	RES, CHIP 100 (1005)
R755	1-208-895-81	s	RES, CHIP 2.2K (1005)
R756	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R757	1-208-927-81	s	RES, CHIP 47K (1005)
R758	1-208-895-81	s	RES, CHIP 2.2K (1005)
R760	1-208-887-81	s	RES, CHIP 1.0K (1005)
R761	1-208-899-81	s	RES, CHIP 3.3K (1005)
R763	1-208-915-81	s	RES, CHIP 15K (1005)
R764	1-208-887-81	s	RES, CHIP 1.0K (1005)
R765	1-208-895-81	s	RES, CHIP 2.2K (1005)
R766	1-208-915-81	s	RES, CHIP 15K (1005)
R767	1-208-895-81	s	RES, CHIP 2.2K (1005)
R768	1-208-915-81	s	RES, CHIP 15K (1005)
R769	1-208-895-81	s	RES, CHIP 2.2K (1005)
R770	1-208-915-81	s	RES, CHIP 15K (1005)
R771	1-208-903-81	s	RES, CHIP 4.7K (1005)
R772	1-208-903-81	s	RES, CHIP 4.7K (1005)
R773	1-208-903-81	s	RES, CHIP 4.7K (1005)
R774	1-208-935-81	s	RES, CHIP 100K (1005)
R775	1-208-935-81	s	RES, CHIP 100K (1005)
R776	1-220-870-81	s	RES, CHIP 10 (1005)
R777	1-220-870-81	s	RES, CHIP 10 (1005)
R778	1-220-870-81	s	RES, CHIP 10 (1005)
R779	1-208-935-81	s	RES, CHIP 100K (1005)
R780	1-208-935-81	s	RES, CHIP 100K (1005)
R781	1-208-935-81	s	RES, CHIP 100K (1005)

(FP-157 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R782	1-208-935-81	s	RES, CHIP 100K (1005)
R783	1-208-887-81	s	RES, CHIP 1.0K (1005)
R784	1-208-947-81	s	RES, CHIP 330K (1005)
R785	1-208-911-81	s	RES, CHIP 10K (1005)
R786	1-208-887-81	s	RES, CHIP 1.0K (1005)
R787	1-208-887-81	s	RES, CHIP 1.0K (1005)
R788	1-208-927-81	s	RES, CHIP 47K (1005)
R789	1-208-887-81	s	RES, CHIP 1.0K (1005)
R790	1-220-874-81	s	RES, CHIP 15 (1005)
R791	1-220-882-81	s	RES, CHIP 33 (1005)
R792	1-208-867-81	s	RES, CHIP 150 (1005)
R793	1-208-875-81	s	RES, CHIP 330 (1005)
R794	1-208-871-81	s	RES, CHIP 220 (1005)
R795	1-220-870-81	s	RES, CHIP 10 (1005)
R796	1-208-903-81	s	RES, CHIP 4.7K (1005)
R797	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R798	1-208-903-81	s	RES, CHIP 4.7K (1005)
R800	1-208-903-81	s	RES, CHIP 4.7K (1005)
R801	1-208-903-81	s	RES, CHIP 4.7K (1005)
R802	1-208-903-81	s	RES, CHIP 4.7K (1005)
R803	1-208-935-81	s	RES, CHIP 100K (1005)
R804	1-208-935-81	s	RES, CHIP 100K (1005)
R805	1-208-939-81	s	RES, CHIP 150K (1005)
R806	1-208-939-81	s	RES, CHIP 150K (1005)
R807	1-208-943-81	s	RES, CHIP 220K (1005)
R808	1-208-911-81	s	RES, CHIP 10K (1005)
R814	1-208-915-81	s	RES, CHIP 15K (1005)
R817	1-208-903-81	s	RES, CHIP 4.7K (1005)
R821	1-208-883-81	s	RES, CHIP 680 (1005)
R822	1-208-927-81	s	RES, CHIP 47K (1005)
R823	1-208-911-81	s	RES, CHIP 10K (1005)
R825	1-220-870-81	s	RES, CHIP 10 (1005)
R826	1-220-870-81	s	RES, CHIP 10 (1005)
R827	1-220-870-81	s	RES, CHIP 10 (1005)
R828	1-208-927-81	s	RES, CHIP 47K (1005)
R832	1-208-935-81	s	RES, CHIP 100K (1005)
R833	1-208-911-81	s	RES, CHIP 10K (1005)
R834	1-208-943-81	s	RES, CHIP 220K (1005)
R835	1-208-911-81	s	RES, CHIP 10K (1005)
R836	1-208-911-81	s	RES, CHIP 10K (1005)
R837	1-208-943-81	s	RES, CHIP 220K (1005)
R838	1-208-943-81	s	RES, CHIP 220K (1005)
R839	1-208-943-81	s	RES, CHIP 220K (1005)
R840	1-208-927-81	s	RES, CHIP 47K (1005)
R841	1-208-919-81	s	RES, CHIP 22K (1005)
R842	1-208-935-81	s	RES, CHIP 100K (1005)
R843	1-208-863-81	s	RES, CHIP 100 (1005)
R845	1-208-935-81	s	RES, CHIP 100K (1005)
R846	1-208-919-81	s	RES, CHIP 22K (1005)
R847	1-208-919-81	s	RES, CHIP 22K (1005)
R848	1-208-911-81	s	RES, CHIP 10K (1005)
R849	1-208-887-81	s	RES, CHIP 1.0K (1005)
R850	1-208-943-81	s	RES, CHIP 220K (1005)
R851	1-208-927-81	s	RES, CHIP 47K (1005)
R852	1-208-911-81	s	RES, CHIP 10K (1005)
R853	1-208-935-81	s	RES, CHIP 100K (1005)
R854	1-208-915-81	s	RES, CHIP 15K (1005)
R855	1-208-927-81	s	RES, CHIP 47K (1005)
R856	1-208-927-81	s	RES, CHIP 47K (1005)

(FP-157 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R857	1-208-959-81	s	RES, CHIP 1M (1005)
R858	1-208-935-81	s	RES, CHIP 100K (1005)
R859	1-208-887-81	s	RES, CHIP 1.0K (1005)
R860	1-208-911-81	s	RES, CHIP 10K (1005)
R861	1-208-911-81	s	RES, CHIP 10K (1005)
R862	1-208-863-81	s	RES, CHIP 100 (1005)
R863	1-208-863-81	s	RES, CHIP 100 (1005)
R864	1-208-895-81	s	RES, CHIP 2.2K (1005)
R865	1-208-875-81	s	RES, CHIP 330 (1005)
R866	1-208-875-81	s	RES, CHIP 330 (1005)
R867	1-208-911-81	s	RES, CHIP 10K (1005)
R868	1-208-871-81	s	RES, CHIP 220 (1005)
R869	1-208-871-81	s	RES, CHIP 220 (1005)
R870	1-208-871-81	s	RES, CHIP 220 (1005)
R871	1-208-879-81	s	RES, CHIP 470 (1005)
R872	1-208-887-81	s	RES, CHIP 1.0K (1005)
R873	1-208-887-81	s	RES, CHIP 1.0K (1005)
R874	1-208-863-81	s	RES, CHIP 100 (1005)
R875	1-208-927-81	s	RES, CHIP 47K (1005)
R876	1-208-867-81	s	RES, CHIP 150 (1005)
R879	1-208-911-81	s	RES, CHIP 10K (1005)
R880	1-208-911-81	s	RES, CHIP 10K (1005)
R881	1-208-871-81	s	RES, CHIP 220 (1005)
R882	1-208-911-81	s	RES, CHIP 10K (1005)
R883	1-208-943-81	s	RES, CHIP 220K (1005)
R884	1-208-911-81	s	RES, CHIP 10K (1005)
R885	1-208-903-81	s	RES, CHIP 4.7K (1005)
R886	1-208-911-81	s	RES, CHIP 10K (1005)
R887	1-208-903-81	s	RES, CHIP 4.7K (1005)
R888	1-208-911-81	s	RES, CHIP 10K (1005)
R889	1-208-903-81	s	RES, CHIP 4.7K (1005)
R892	1-208-911-81	s	RES, CHIP 10K (1005)
R893	1-208-911-81	s	RES, CHIP 10K (1005)
R894	1-208-911-81	s	RES, CHIP 10K (1005)
R896	1-208-863-81	s	RES, CHIP 100 (1005)
R897	1-208-863-81	s	RES, CHIP 100 (1005)
R898	1-208-863-81	s	RES, CHIP 100 (1005)
R903	1-208-911-81	s	RES, CHIP 10K (1005)
R904	1-208-887-81	s	RES, CHIP 1.0K (1005)
R905	1-208-927-81	s	RES, CHIP 47K (1005)
R908	1-208-895-81	s	RES, CHIP 2.2K (1005)
R909	1-208-895-81	s	RES, CHIP 2.2K (1005)
R910	1-208-943-81	s	RES, CHIP 220K (1005)
R912	1-208-935-81	s	RES, CHIP 100K (1005)
R914	1-208-935-81	s	RES, CHIP 100K (1005)
R915	1-208-895-81	s	RES, CHIP 2.2K (1005)
R916	1-208-887-81	s	RES, CHIP 1.0K (1005)
R917	1-208-863-81	s	RES, CHIP 100 (1005)
R918	1-208-863-81	s	RES, CHIP 100 (1005)
R919	1-208-887-81	s	RES, CHIP 1.0K (1005)
R920	1-208-935-81	s	RES, CHIP 100K (1005)
R921	1-208-947-81	s	RES, CHIP 330K (1005)
R922	1-208-935-81	s	RES, CHIP 100K (1005)
R923	1-208-927-81	s	RES, CHIP 47K (1005)
R924	1-208-883-81	s	RES, CHIP 680 (1005)
R925	1-208-935-81	s	RES, CHIP 100K (1005)
R926	1-208-923-81	s	RES, CHIP 33K (1005)
R927	1-208-887-81	s	RES, CHIP 1.0K (1005)
R928	1-208-935-81	s	RES, CHIP 100K (1005)

(FP-157 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R929	1-208-943-81	s	RES, CHIP 220K (1005)
R930	1-208-931-81	s	RES, CHIP 68K (1005)
R931	1-208-931-81	s	RES, CHIP 68K (1005)
R932	1-208-911-81	s	RES, CHIP 10K (1005)
R933	1-208-863-81	s	RES, CHIP 100 (1005)
R934	1-208-895-81	s	RES, CHIP 2.2K (1005)
R935	1-208-899-81	s	RES, CHIP 3.3K (1005)
R936	1-208-899-81	s	RES, CHIP 3.3K (1005)
R937	1-208-911-81	s	RES, CHIP 10K (1005)
R938	1-220-878-81	s	RES, CHIP 22 (1005)
R939	1-208-911-81	s	RES, CHIP 10K (1005)
R940	1-208-895-81	s	RES, CHIP 2.2K (1005)
R941	1-208-899-81	s	RES, CHIP 3.3K (1005)
R942	1-208-899-81	s	RES, CHIP 3.3K (1005)
R943	1-208-887-81	s	RES, CHIP 1.0K (1005)
R944	1-220-878-81	s	RES, CHIP 22 (1005)
R946	1-208-927-81	s	RES, CHIP 47K (1005)
R947	1-208-927-81	s	RES, CHIP 47K (1005)
R948	1-208-927-81	s	RES, CHIP 47K (1005)
R949	1-208-927-81	s	RES, CHIP 47K (1005)
R950	1-208-927-81	s	RES, CHIP 47K (1005)
R951	1-208-927-81	s	RES, CHIP 47K (1005)
R952	1-208-855-81	s	RES, CHIP 47 (1005)
R953	1-208-855-81	s	RES, CHIP 47 (1005)
R954	1-208-855-81	s	RES, CHIP 47 (1005)
R955	1-208-855-81	s	RES, CHIP 47 (1005)
R956	1-208-935-81	s	RES, CHIP 100K (1005)
R957	1-208-887-81	s	RES, CHIP 1.0K (1005)
R958	1-208-887-81	s	RES, CHIP 1.0K (1005)
R959	1-220-878-81	s	RES, CHIP 22 (1005)
R960	1-208-887-81	s	RES, CHIP 1.0K (1005)
R961	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R962	1-208-943-81	s	RES, CHIP 220K (1005)
R963	1-208-855-81	s	RES, CHIP 47 (1005)
R965	1-208-887-81	s	RES, CHIP 1.0K (1005)
R966	1-208-943-81	s	RES, CHIP 220K (1005)
R967	1-208-943-81	s	RES, CHIP 220K (1005)
R968	1-208-943-81	s	RES, CHIP 220K (1005)
R969	1-208-887-81	s	RES, CHIP 1.0K (1005)
R970	1-208-887-81	s	RES, CHIP 1.0K (1005)
R971	1-208-887-81	s	RES, CHIP 1.0K (1005)
R972	1-208-935-81	s	RES, CHIP 100K (1005)
R973	1-208-935-81	s	RES, CHIP 100K (1005)
R974	1-208-871-81	s	RES, CHIP 220 (1005)
R975	1-208-863-81	s	RES, CHIP 100 (1005)
R976	1-208-887-81	s	RES, CHIP 1.0K (1005)
R977	1-208-887-81	s	RES, CHIP 1.0K (1005)
R978	1-208-927-81	s	RES, CHIP 47K (1005)
R979	1-208-927-81	s	RES, CHIP 47K (1005)
R980	1-220-878-81	s	RES, CHIP 22 (1005)
R981	1-220-870-81	s	RES, CHIP 10 (1005)
R982	1-220-870-81	s	RES, CHIP 10 (1005)
R983	1-220-878-81	s	RES, CHIP 22 (1005)
R984	1-220-878-81	s	RES, CHIP 22 (1005)
R986	1-220-870-81	s	RES, CHIP 10 (1005)
R987	1-220-870-81	s	RES, CHIP 10 (1005)
R988	1-220-870-81	s	RES, CHIP 10 (1005)
R989	1-220-870-81	s	RES, CHIP 10 (1005)
R990	1-220-870-81	s	RES, CHIP 10 (1005)

(FP-157 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R991	1-220-870-81	s	RES, CHIP 10 (1005)
R992	1-220-870-81	s	RES, CHIP 10 (1005)
R993	1-220-870-81	s	RES, CHIP 10 (1005)
R994	1-220-870-81	s	RES, CHIP 10 (1005)
R995	1-220-870-81	s	RES, CHIP 10 (1005)
R996	1-220-870-81	s	RES, CHIP 10 (1005)
R997	1-220-870-81	s	RES, CHIP 10 (1005)
R998	1-208-887-81	s	RES, CHIP 1.0K (1005)
R999	1-208-935-81	s	RES, CHIP 100K (1005)
R1001	1-220-870-81	s	RES, CHIP 10 (1005)
R1002	1-220-870-81	s	RES, CHIP 10 (1005)
R1003	1-220-870-81	s	RES, CHIP 10 (1005)
R1004	1-220-870-81	s	RES, CHIP 10 (1005)
R1005	1-220-870-81	s	RES, CHIP 10 (1005)
R1006	1-220-870-81	s	RES, CHIP 10 (1005)
R1007	1-220-870-81	s	RES, CHIP 10 (1005)
R1008	1-220-870-81	s	RES, CHIP 10 (1005)
R1009	1-220-878-81	s	RES, CHIP 22 (1005)
R1010	1-220-878-81	s	RES, CHIP 22 (1005)
R1011	1-220-878-81	s	RES, CHIP 22 (1005)
R1012	1-220-870-81	s	RES, CHIP 10 (1005)
R1013	1-220-870-81	s	RES, CHIP 10 (1005)
R1014	1-220-870-81	s	RES, CHIP 10 (1005)
R1015	1-220-870-81	s	RES, CHIP 10 (1005)
R1016	1-220-870-81	s	RES, CHIP 10 (1005)
R1022	1-220-878-81	s	RES, CHIP 22 (1005)
R1023	1-220-878-81	s	RES, CHIP 22 (1005)
R1024	1-208-935-81	s	RES, CHIP 100K (1005)
R1025	1-208-935-81	s	RES, CHIP 100K (1005)
R1027	1-208-935-81	s	RES, CHIP 100K (1005)
RB701	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB702	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB703	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB800	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB801	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB802	1-234-380-21	s	RES, NETWORK 47K (1005X4)
RB910	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB911	1-234-380-21	s	RES, NETWORK 47K (1005X4)
RB912	1-234-380-21	s	RES, NETWORK 47K (1005X4)
RB913	1-234-380-21	s	RES, NETWORK 47K (1005X4)
RB914	1-234-380-21	s	RES, NETWORK 47K (1005X4)
RB915	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB916	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB917	1-234-380-21	s	RES, NETWORK 47K (1005X4)
RB918	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB919	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB920	1-234-380-21	s	RES, NETWORK 47K (1005X4)
RB921	1-234-380-21	s	RES, NETWORK 47K (1005X4)
RB922	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB923	1-234-380-21	s	RES, NETWORK 47K (1005X4)
RV1	1-227-248-11	s	RES, VAR, CARBON 5K
RV2	1-227-248-11	s	RES, VAR, CARBON 5K
RV700	1-227-248-11	s	RES, VAR, CARBON 5K
RV701	1-227-248-11	s	RES, VAR, CARBON 5K
S1	1-771-141-21	s	SWITCH, SLIDE
S2	1-771-141-21	s	SWITCH, SLIDE
S3	1-771-141-21	s	SWITCH, SLIDE
S4	1-771-141-21	s	SWITCH, SLIDE
S10	1-771-140-21	s	SWITCH, SLIDE

(FP-157 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
S20	1-771-140-21	s	SWITCH, SLIDE
S460	1-771-140-21	s	SWITCH, SLIDE
S501	1-692-270-41	s	SWITCH, SLIDE
S700	1-771-140-21	s	SWITCH, SLIDE
S701	1-570-878-31	s	SWITCH, PUSH (1 KEY)
S702	1-571-787-11	s	SWITCH, TACTILE
S703	1-771-141-21	s	SWITCH, SLIDE
S830	1-771-721-21	s	SWITCH, TACTILE
S831	1-572-725-11	s	SWITCH, TACTILE
S832	1-572-725-11	s	SWITCH, TACTILE
S833	1-572-725-11	s	SWITCH, TACTILE
S834	1-572-725-11	s	SWITCH, TACTILE
S835	1-572-725-11	s	SWITCH, TACTILE
S836	1-572-725-11	s	SWITCH, TACTILE
S837	1-771-141-21	s	SWITCH, SLIDE
S838	1-771-141-21	s	SWITCH, SLIDE
S839	1-771-141-21	s	SWITCH, SLIDE
S840	1-572-725-11	s	SWITCH, TACTILE
S841	1-572-725-11	s	SWITCH, TACTILE
S842	1-572-725-11	s	SWITCH, TACTILE
S843	1-572-725-11	s	SWITCH, TACTILE
S844	1-572-725-11	s	SWITCH, TACTILE
S845	1-572-725-11	s	SWITCH, TACTILE
S846	1-572-725-11	s	SWITCH, TACTILE
S911	1-692-270-41	s	SWITCH, SLIDE
TP1	1-535-757-21	s	CHIP, CHECKER
TP2	1-535-757-21	s	CHIP, CHECKER
TP3	1-535-757-21	s	CHIP, CHECKER
TP4	1-535-757-21	s	CHIP, CHECKER
TP101	1-535-757-21	s	CHIP, CHECKER
TP201	1-535-757-21	s	CHIP, CHECKER
TP301	1-535-757-21	s	CHIP, CHECKER
TP401	1-535-757-21	s	CHIP, CHECKER
X910	1-813-177-21	s	VIBRATOR, CRYSTAL (16 MHz)

HP-148 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1550-451-A	s	MOUNTED CIRCUIT BOARD, HP-148
C1	1-162-966-91	s	CAP, CERAMIC 2200PF B 1608
C2	1-162-966-91	s	CAP, CERAMIC 2200PF B 1608
CN101	1-573-768-21	s	PIN, CONNECTOR (1.5MM) (SMD)5P
FL1	1-239-895-22	s	FILTER, EMI (SMD)
J1	1-507-980-41	s	JACK
L1	1-469-557-21	s	INDUCTOR, CHIP 22UH (LB2016)
L2	1-469-557-21	s	INDUCTOR, CHIP 22UH (LB2016)
L3	1-216-864-91	s	CONDUCTOR, CHIP (1608)
Q1	8-729-013-37	s	TRANSISTOR 2SC4213-AB-TE85L
Q2	8-729-013-37	s	TRANSISTOR 2SC4213-AB-TE85L
R1	1-211-973-91	s	RES, CHIP 15 (1608)
R2	1-211-973-91	s	RES, CHIP 15 (1608)
R3	1-218-847-91	s	RES, CHIP 1.0K (1608)
R4	1-218-847-91	s	RES, CHIP 1.0K (1608)

HP-149 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1550-452-A	s	MOUNTED CIRCUIT BOARD, HP-149
C1	1-162-966-91	s	CAP, CERAMIC 2200PF B 1608
C2	1-162-966-91	s	CAP, CERAMIC 2200PF B 1608
CN103	1-580-756-21	s	PIN, CONNECTOR (SMD) 7P
CN206	1-794-945-12	s	JACK, SMALL TYPE (WITH SWITCH)
FL1	1-239-895-22	s	FILTER, EMI (SMD)
FL2	1-239-895-22	s	FILTER, EMI (SMD)
L3	1-469-549-21	s	INDUCTOR, CHIP 1.0UH (LB2016)
L4	1-216-864-91	s	CONDUCTOR, CHIP (1608)
Q1	8-729-013-37	s	TRANSISTOR 2SC4213-AB-TE85L
Q2	8-729-013-37	s	TRANSISTOR 2SC4213-AB-TE85L
R1	1-211-973-91	s	RES, CHIP 15 (1608)
R2	1-211-973-91	s	RES, CHIP 15 (1608)
R3	1-218-847-91	s	RES, CHIP 1.0K (1608)
R4	1-218-847-91	s	RES, CHIP 1.0K (1608)

IO-235 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1540-124-A	s	MOUNTED CIRCUIT BOARD, IO-235
C6	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
CN1	1-760-388-21	o	CONNECTOR PIN (SMD) 9P
CN101	1-778-787-13	o	CONNECTOR, COAXIAL (BNC TYPE)
CN102	1-778-787-13	o	CONNECTOR, COAXIAL (BNC TYPE)
CN103	1-778-787-13	o	CONNECTOR, COAXIAL (BNC TYPE)
CN104	1-778-787-13	o	CONNECTOR, COAXIAL (BNC TYPE)
FB1	1-414-445-21	s	FERRITE, EMI (SMD) (1608)
FB2	1-414-445-21	s	FERRITE, EMI (SMD) (1608)
FB3	1-414-445-21	s	FERRITE, EMI (SMD) (1608)
FL1	1-239-897-22	s	FILTER, EMI (SMD)
FL2	1-239-897-22	s	FILTER, EMI (SMD)
R1	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4	1-218-827-91	s	RES, CHIP 150 (1608)
R5	1-218-827-91	s	RES, CHIP 150 (1608)

KY-623 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1540-109-A	s	MOUNTED CIRCUIT BOARD, KY-623
C1	1-165-908-91	s	CAP, CERAMIC 1MF B 1608
CN1	1-580-057-21	s	PIN, CONNECTOR (SMD) 4P
D1	8-719-077-09	s	DIODE CL-196HR-CD-T
D2	8-719-077-09	s	DIODE CL-196HR-CD-T
D3	8-719-077-09	s	DIODE CL-196HR-CD-T
D4	8-719-077-09	s	DIODE CL-196HR-CD-T
IC1	6-702-481-01	s	IC PCA9555DB-118
Q1	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q2	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q3	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q4	8-729-928-82	s	TRANSISTOR DTC144EE-TL
R1	1-208-875-81	s	RES, CHIP 330 (1005)
R2	1-208-875-81	s	RES, CHIP 330 (1005)
R3	1-208-875-81	s	RES, CHIP 330 (1005)
R4	1-208-875-81	s	RES, CHIP 330 (1005)
R5	1-208-863-81	s	RES, CHIP 100 (1005)
R6	1-208-863-81	s	RES, CHIP 100 (1005)
RB1	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB2	1-234-375-21	s	RES, NETWORK 1K (1005X4)
S1	1-572-725-11	s	SWITCH, TACTILE
S2	1-572-725-11	s	SWITCH, TACTILE
S3	1-572-725-11	s	SWITCH, TACTILE
S4	1-572-725-11	s	SWITCH, TACTILE
S5	1-572-725-11	s	SWITCH, TACTILE
S6	1-572-725-11	s	SWITCH, TACTILE
S7	1-572-725-11	s	SWITCH, TACTILE

LED-444 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
CN1	1-794-375-21	s	PIN, CONNECTOR 2P
D4	6-500-925-01	s	DIODE CL-432S-WF-SD-TS
D6	6-500-925-01	s	DIODE CL-432S-WF-SD-TS
R4	1-218-835-91	s	RES, CHIP 330 (1608)
R6	1-218-835-91	s	RES, CHIP 330 (1608)

MA-162 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1538-886-A	s	MOUNTED CIRCUIT BOARD, MA-162
C9	1-126-405-21	s	CAP, CHIP ELECT 10MF (6.3X5.7)
C10	1-126-405-21	s	CAP, CHIP ELECT 10MF (6.3X5.7)
C11	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C12	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C13	1-117-145-21	s	CAP, ELECT 1MF
C14	1-117-145-21	s	CAP, ELECT 1MF
C15	1-117-145-21	s	CAP, ELECT 1MF
C16	1-117-145-21	s	CAP, ELECT 1MF
C17	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C18	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C19	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C20	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C21	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C22	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C23	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C24	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C25	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C26	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C27	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C28	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C31	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C32	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C33	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C34	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C35	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C36	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C37	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C38	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
CN1	1-573-768-21	s	PIN, CONNECTOR (1.5MM) (SMD)5P
D1	8-719-820-42	s	DIODE 1SS302-TE85L
D2	8-719-820-42	s	DIODE 1SS302-TE85L
D3	8-719-820-42	s	DIODE 1SS302-TE85L
D4	8-719-820-42	s	DIODE 1SS302-TE85L
D5	8-719-989-04	s	DIODE DAN222-TL
D6	8-719-989-04	s	DIODE DAN222-TL
FB1	1-400-461-21	s	FERRITE, EMI (SMD) (1005)
FB2	1-400-461-21	s	FERRITE, EMI (SMD) (1005)
FB3	1-400-461-21	s	FERRITE, EMI (SMD) (1005)
FB4	1-400-461-21	s	FERRITE, EMI (SMD) (1005)
IC1	8-759-422-21	s	IC NJM4580V(TE2)
IC2	8-759-422-21	s	IC NJM4580V(TE2)
L3	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
Q1	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q2	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q3	8-729-202-14	s	TRANSISTOR 2SC2713G-TE85L
Q4	8-729-202-14	s	TRANSISTOR 2SC2713G-TE85L
Q5	8-729-012-36	s	TRANSISTOR 2SK711-BL/V-TE85L
Q6	8-729-012-36	s	TRANSISTOR 2SK711-BL/V-TE85L
Q7	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q8	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q9	8-729-012-36	s	TRANSISTOR 2SK711-BL/V-TE85L
Q10	8-729-012-36	s	TRANSISTOR 2SK711-BL/V-TE85L
Q11	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR

(MA-162 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
Q12	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q17	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q18	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
R1	1-208-923-81	s	RES, CHIP 33K (1005)
R2	1-208-923-81	s	RES, CHIP 33K (1005)
R3	1-208-863-81	s	RES, CHIP 100 (1005)
R4	1-218-855-91	s	RES, CHIP 2.2K (1608)
R5	1-218-855-91	s	RES, CHIP 2.2K (1608)
R6	1-218-855-91	s	RES, CHIP 2.2K (1608)
R7	1-216-813-91	s	RES, CHIP 220 (1608)
R8	1-218-855-91	s	RES, CHIP 2.2K (1608)
R9	1-218-855-91	s	RES, CHIP 2.2K (1608)
R10	1-218-855-91	s	RES, CHIP 2.2K (1608)
R11	1-216-813-91	s	RES, CHIP 220 (1608)
R12	1-218-855-91	s	RES, CHIP 2.2K (1608)
R13	1-218-855-91	s	RES, CHIP 2.2K (1608)
R14	1-218-855-91	s	RES, CHIP 2.2K (1608)
R15	1-216-813-91	s	RES, CHIP 220 (1608)
R16	1-218-855-91	s	RES, CHIP 2.2K (1608)
R17	1-218-855-91	s	RES, CHIP 2.2K (1608)
R18	1-218-855-91	s	RES, CHIP 2.2K (1608)
R19	1-216-813-91	s	RES, CHIP 220 (1608)
R20	1-208-919-81	s	RES, CHIP 22K (1005)
R21	1-208-919-81	s	RES, CHIP 22K (1005)
R22	1-208-919-81	s	RES, CHIP 22K (1005)
R23	1-208-919-81	s	RES, CHIP 22K (1005)
R24	1-208-863-81	s	RES, CHIP 100 (1005)
R25	1-208-863-81	s	RES, CHIP 100 (1005)
R26	1-208-863-81	s	RES, CHIP 100 (1005)
R27	1-208-863-81	s	RES, CHIP 100 (1005)
R28	1-208-959-81	s	RES, CHIP 1M (1005)
R29	1-208-899-81	s	RES, CHIP 3.3K (1005)
R30	1-208-919-81	s	RES, CHIP 22K (1005)
R31	1-208-959-81	s	RES, CHIP 1M (1005)
R34	1-208-871-81	s	RES, CHIP 220 (1005)
R35	1-208-859-81	s	RES, CHIP 68 (1005)
R36	1-208-959-81	s	RES, CHIP 1M (1005)
R37	1-208-871-81	s	RES, CHIP 220 (1005)
R38	1-208-859-81	s	RES, CHIP 68 (1005)
R39	1-208-959-81	s	RES, CHIP 1M (1005)
R40	1-208-923-81	s	RES, CHIP 33K (1005)
R41	1-208-959-81	s	RES, CHIP 1M (1005)
R42	1-208-959-81	s	RES, CHIP 1M (1005)
R45	1-208-883-81	s	RES, CHIP 680 (1005)
R46	1-208-871-81	s	RES, CHIP 220 (1005)
R47	1-208-959-81	s	RES, CHIP 1M (1005)
R48	1-208-883-81	s	RES, CHIP 680 (1005)
R49	1-208-871-81	s	RES, CHIP 220 (1005)
R50	1-208-959-81	s	RES, CHIP 1M (1005)
R51	1-208-899-81	s	RES, CHIP 3.3K (1005)
R52	1-208-919-81	s	RES, CHIP 22K (1005)
R55	1-208-923-81	s	RES, CHIP 33K (1005)
R56	1-208-891-81	s	RES, CHIP 1.5K (1005)
R57	1-208-891-81	s	RES, CHIP 1.5K (1005)
R58	1-208-891-81	s	RES, CHIP 1.5K (1005)
R59	1-208-891-81	s	RES, CHIP 1.5K (1005)
R60	1-208-899-81	s	RES, CHIP 3.3K (1005)
R61	1-208-899-81	s	RES, CHIP 3.3K (1005)

(MA-162 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R62	1-208-899-81	s	RES, CHIP 3.3K (1005)
R63	1-208-899-81	s	RES, CHIP 3.3K (1005)
R69	1-218-855-91	s	RES, CHIP 2.2K (1608)
R70	1-218-855-91	s	RES, CHIP 2.2K (1608)

MB-1111 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1540-107-A	s	MOUNTED CIRCUIT BOARD, MB-1111
3pcs	2-534-514-02	o	SUPPORT (1)
6pcs	3-855-938-01	s	SCREW
3pcs	7-621-775-08	s	SCREW +B 2.6X3
C1	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C6	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C7	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C8	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C9	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C10	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C11	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C12	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C13	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C14	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C15	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C16	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C17	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C18	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C19	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C20	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C21	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C22	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
CN1	1-778-532-21	o	CONNECTOR, BOARD TO BOARD 80P
CN2	1-580-055-21	o	PIN, CONNECTOR (SMD) 2P
CN102	1-817-097-21	s	PIN, CONNECTOR (1.5MM)(SMD)13P
CN103	1-691-550-21	s	PIN, CONNECTOR (1.5MM)(SMD) 3P
CN105	1-766-431-51	s	HOUSING, CONNECTOR 30P
CN106	1-766-431-51	s	HOUSING, CONNECTOR 30P
CN107	1-766-431-51	s	HOUSING, CONNECTOR 30P
CN109	1-778-649-31	s	CONNECTOR, FFC/FPC(ZIF) ST 24P
CN110	1-779-992-21	s	PIN, CONNECTOR (PWB) 8P
CN111	1-784-625-31	s	CONNECTOR, FFC/FPC(ZIF) AN 30P
CN112	1-573-290-21	s	PIN, CONNECTOR (1.5MM) (SMD)4P
CN113	1-778-651-31	s	CONNECTOR, FFC/FPC(ZIF) ST 40P
CN114	1-691-591-21	o	PIN, CONNECTOR (1.5MM) (SMD)8P
CN115	1-779-804-21	s	CONNECTOR, BOARD TO BOARD 30P
CN116	1-691-591-21	o	PIN, CONNECTOR (1.5MM) (SMD)8P
CN117	1-766-376-21	s	PIN, CONNECTOR (1.5MM)(SMD) 9P
CN118	1-573-290-21	s	PIN, CONNECTOR (1.5MM) (SMD)4P
CN119	1-573-290-21	s	PIN, CONNECTOR (1.5MM) (SMD)4P
CN120	1-573-290-21	s	PIN, CONNECTOR (1.5MM) (SMD)4P
CN122	1-573-290-21	s	PIN, CONNECTOR (1.5MM) (SMD)4P
CN123	1-794-519-21	s	PIN, CONNECTOR (PC BOARD) 14P
CN801	1-770-297-51	s	HOUSING, CONNECTOR 12P
ET1	1-780-569-11	s	TERMINAL (ON BOARD CONTACT)
ET2	1-780-569-11	s	TERMINAL (ON BOARD CONTACT)
ET3	1-780-569-11	s	TERMINAL (ON BOARD CONTACT)
ET4	1-780-569-11	s	TERMINAL (ON BOARD CONTACT)
ET5	1-780-569-11	s	TERMINAL (ON BOARD CONTACT)
ET6	1-780-569-11	s	TERMINAL (ON BOARD CONTACT)
ET7	1-780-569-11	s	TERMINAL (ON BOARD CONTACT)
ET8	1-780-569-11	s	TERMINAL (ON BOARD CONTACT)
ET9	1-780-569-11	s	TERMINAL (ON BOARD CONTACT)
ET10	1-780-569-11	s	TERMINAL (ON BOARD CONTACT)

(MB-1111 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
ET11	1-780-569-11	s	TERMINAL (ON BOARD CONTACT)
ET12	1-780-569-11	s	TERMINAL (ON BOARD CONTACT)
S1	1-692-881-41	s	SWITCH, SLIDE

MS-86 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1540-096-A	s	MOUNTED CIRCUIT BOARD, MS-86
C1	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C5	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C6	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C7	1-115-340-91	s	CAP, CERAMIC 0.22MF B (2012)
C9	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
CN1	1-766-383-21	s	PIN, CONNECTOR (1.5MM)(SMD)12P
CN2	1-766-376-21	s	PIN, CONNECTOR (1.5MM)(SMD) 9P
CN3	1-817-653-42	s	MEMORY STICK CONNECTOR
CN4	1-784-625-31	s	CONNECTOR, FFC/FPC(ZIF) AN 30P
CN5	1-573-806-21	s	PIN, CONNECTOR (1.5MM) (SMD)6P
D1	6-500-122-01	s	DIODE CL-375HR/YG-D-TS
D2	8-719-989-04	s	DIODE DAN222-TL
D3	8-719-083-83	s	DI UDZSUSTE-1715B
D5	8-719-989-04	s	DIODE DAN222-TL
FL1	1-234-489-21	s	FILTER, EMI
FL2	1-234-489-21	s	FILTER, EMI
IC1	8-759-338-95	s	IC NJM2903V(TE2)
IC2	6-713-118-01	s	IC PCA9554BS-T
IC3	8-759-436-53	s	IC LTC1153CS8-E2
Q1	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q2	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q3	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q4	6-550-697-01	s	TRANSISTOR HAT2164H-EL-E
R1	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2	1-208-927-81	s	RES, CHIP 47K (1005)
R3	1-208-927-81	s	RES, CHIP 47K (1005)
R4	1-208-915-81	s	RES, CHIP 15K (1005)
R5	1-208-895-81	s	RES, CHIP 2.2K (1005)
R6	1-208-931-81	s	RES, CHIP 68K (1005)
R7	1-208-863-81	s	RES, CHIP 100 (1005)
R8	1-208-887-81	s	RES, CHIP 1.0K (1005)
R9	1-208-887-81	s	RES, CHIP 1.0K (1005)
R10	1-208-887-81	s	RES, CHIP 1.0K (1005)
R11	1-208-887-81	s	RES, CHIP 1.0K (1005)
R12	1-208-887-81	s	RES, CHIP 1.0K (1005)
R13	1-208-887-81	s	RES, CHIP 1.0K (1005)
R14	1-208-911-81	s	RES, CHIP 10K (1005)
R15	1-208-887-81	s	RES, CHIP 1.0K (1005)
R16	1-208-935-81	s	RES, CHIP 100K (1005)
R17	1-208-887-81	s	RES, CHIP 1.0K (1005)
R18	1-208-935-81	s	RES, CHIP 100K (1005)
R19	1-208-887-81	s	RES, CHIP 1.0K (1005)
R20	1-208-863-81	s	RES, CHIP 100 (1005)
R21	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R22	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R23	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R24	1-208-935-81	s	RES, CHIP 100K (1005)
R26	1-208-911-81	s	RES, CHIP 10K (1005)
R27	1-219-706-21	s	RES, CHIP (SQUARE TYPE) 0.10
R28	1-208-947-81	s	RES, CHIP 330K (1005)
R29	1-208-935-81	s	RES, CHIP 100K (1005)
R31	1-208-903-81	s	RES, CHIP 4.7K (1005)
R32	1-208-855-81	s	RES, CHIP 47 (1005)
R33	1-208-875-81	s	RES, CHIP 330 (1005)

PA-342A BOARD

Ref. No. or Q'ty	Part No.	SP	Description
C1	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2	1-112-300-91	s	CAP, CERAMIC 4.7MF B (2012)
C3	1-100-816-21	s	CAP, ELECT 33MF (5.6X6.5)
C4	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C6	1-112-300-91	s	CAP, CERAMIC 4.7MF B (2012)
C7	1-100-816-21	s	CAP, ELECT 33MF (5.6X6.5)
C8	1-135-349-21	s	CAP, ELECT 22MF (6.3X6)
C9	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C12	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C14	1-165-629-91	s	CAP, CERAMIC 1000000PF B(3225)
C15	1-165-629-91	s	CAP, CERAMIC 1000000PF B(3225)
C16	1-165-629-91	s	CAP, CERAMIC 1000000PF B(3225)
C17	1-165-629-91	s	CAP, CERAMIC 1000000PF B(3225)
C18	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C19	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C20	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C21	1-112-300-91	s	CAP, CERAMIC 4.7MF B (2012)
C22	1-112-300-91	s	CAP, CERAMIC 4.7MF B (2012)
C23	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C24	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C26	1-112-300-91	s	CAP, CERAMIC 4.7MF B (2012)
C27	1-112-300-91	s	CAP, CERAMIC 4.7MF B (2012)
C28	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C29	1-164-840-81	s	CAP, CHIP CERAMIC 1PF CK 1005
C30	1-164-840-81	s	CAP, CHIP CERAMIC 1PF CK 1005
C31	1-100-670-91	s	CAP, CERAMIC 4.7MF C (2012)
C32	1-100-670-91	s	CAP, CERAMIC 4.7MF C (2012)
C33	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C34	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C35	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C36	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C38	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C40	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C42	1-164-843-81	s	CAP, CHIP CERAMIC 3PF CJ 1005
C44	1-164-843-81	s	CAP, CHIP CERAMIC 3PF CJ 1005
C46	1-125-827-91	s	CAP, CHIP CERAMIC 1MF B
C48	1-125-827-91	s	CAP, CHIP CERAMIC 1MF B
C51	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C52	1-112-300-91	s	CAP, CERAMIC 4.7MF B (2012)
C53	1-135-646-91	s	CAP, CHIP FILM 1MF
C54	1-135-646-91	s	CAP, CHIP FILM 1MF
C57	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C58	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C61	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C62	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C65	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C66	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C69	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C71	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C73	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C74	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C75	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C76	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C77	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C81	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C83	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C84	1-135-646-91	s	CAP, CHIP FILM 1MF
C85	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(PA-342A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C86	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C87	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C88	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C89	1-112-300-91	s	CAP, CERAMIC 4.7MF B (2012)
C95	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C96	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C97	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C100	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C102	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C103	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C104	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C105	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C106	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
D1	6-502-121-01	s	DI MA3J142EGLS0
D4	6-502-146-01	o	DI MA2S7280G8S0
D5	8-719-210-46	s	DIODE EC10QS-06-TE12L
E1	1-535-877-22	s	CHIP, CHECKER
FB1	1-400-334-21	s	FERRITE, EMI (SMD) (1608)
FB2	1-469-122-21	s	FERRITE, EMI (SMD) (1608)
FB3	1-469-122-21	s	FERRITE, EMI (SMD) (1608)
FB4	1-400-334-21	s	FERRITE, EMI (SMD) (1608)
FB5	1-400-334-21	s	FERRITE, EMI (SMD) (1608)
FB6	1-400-334-21	s	FERRITE, EMI (SMD) (1608)
FB7	1-469-122-21	s	FERRITE, EMI (SMD) (1608)
IC5	6-706-863-01	s	IC LMH6732MFX/NOPB
IC7	6-706-863-01	s	IC LMH6732MFX/NOPB
IC10	8-753-240-64	s	IC CXA3647CR-T4
Q1	8-729-809-73	s	TRANSISTOR 2SK536-TB
R10	1-208-863-81	s	RES, CHIP 100 (1005)
R13	1-208-863-81	s	RES, CHIP 100 (1005)
R15	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R16	1-208-935-81	s	RES, CHIP 100K (1005)
R18	1-208-959-81	s	RES, CHIP 1M (1005)
R19	1-208-855-81	s	RES, CHIP 47 (1005)
R20	1-208-927-81	s	RES, CHIP 47K (1005)
R21	1-208-899-81	s	RES, CHIP 3.3K (1005)
R22	1-208-915-81	s	RES, CHIP 15K (1005)
R29	1-208-911-81	s	RES, CHIP 10K (1005)
R32	1-220-870-81	s	RES, CHIP 10 (1005)
R33	1-208-903-81	s	RES, CHIP 4.7K (1005)
R34	1-208-919-81	s	RES, CHIP 22K (1005)
R35	1-208-887-81	s	RES, CHIP 1.0K (1005)
R36	1-208-919-81	s	RES, CHIP 22K (1005)
R37	1-220-878-81	s	RES, CHIP 22 (1005)
R38	1-220-878-81	s	RES, CHIP 22 (1005)
R39	1-208-911-81	s	RES, CHIP 10K (1005)
R40	1-208-911-81	s	RES, CHIP 10K (1005)
R45	1-208-887-81	s	RES, CHIP 1.0K (1005)
R47	1-208-887-81	s	RES, CHIP 1.0K (1005)
R49	1-208-887-81	s	RES, CHIP 1.0K (1005)
R51	1-208-887-81	s	RES, CHIP 1.0K (1005)
R53	1-208-935-81	s	RES, CHIP 100K (1005)
R55	1-208-935-81	s	RES, CHIP 100K (1005)
R57	1-208-879-81	s	RES, CHIP 470 (1005)
R59	1-208-879-81	s	RES, CHIP 470 (1005)
R61	1-208-863-81	s	RES, CHIP 100 (1005)

(PA-342A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R63	1-208-863-81	s	RES, CHIP 100 (1005)
R65	1-208-871-81	s	RES, CHIP 220 (1005)
R67	1-208-871-81	s	RES, CHIP 220 (1005)
R75	1-208-887-81	s	RES, CHIP 1.0K (1005)
R78	1-208-911-81	s	RES, CHIP 10K (1005)
R87	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R88	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R91	1-208-875-81	s	RES, CHIP 330 (1005)
R92	1-208-875-81	s	RES, CHIP 330 (1005)
R95	1-208-911-81	s	RES, CHIP 10K (1005)
R96	1-208-887-81	s	RES, CHIP 1.0K (1005)
R97	1-208-895-81	s	RES, CHIP 2.2K (1005)
R98	1-208-895-81	s	RES, CHIP 2.2K (1005)
R99	1-208-903-81	s	RES, CHIP 4.7K (1005)
R100	1-208-911-81	s	RES, CHIP 10K (1005)
R101	1-208-887-81	s	RES, CHIP 1.0K (1005)
R110	1-220-882-81	s	RES, CHIP 33 (1005)

PA-343A BOARD

Ref. No. or Q'ty	Part No.	SP	Description
C1	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2	1-112-300-91	s	CAP, CERAMIC 4.7MF B (2012)
C3	1-100-816-21	s	CAP, ELECT 33MF (5.6X6.5)
C4	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C6	1-112-300-91	s	CAP, CERAMIC 4.7MF B (2012)
C7	1-100-816-21	s	CAP, ELECT 33MF (5.6X6.5)
C8	1-135-349-21	s	CAP, ELECT 22MF (6.3X6)
C9	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C12	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C14	1-165-629-91	s	CAP, CERAMIC 1000000PF B(3225)
C15	1-165-629-91	s	CAP, CERAMIC 1000000PF B(3225)
C16	1-165-629-91	s	CAP, CERAMIC 1000000PF B(3225)
C17	1-165-629-91	s	CAP, CERAMIC 1000000PF B(3225)
C18	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C19	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C20	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C21	1-112-300-91	s	CAP, CERAMIC 4.7MF B (2012)
C22	1-112-300-91	s	CAP, CERAMIC 4.7MF B (2012)
C23	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C24	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C26	1-112-300-91	s	CAP, CERAMIC 4.7MF B (2012)
C27	1-112-300-91	s	CAP, CERAMIC 4.7MF B (2012)
C28	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C29	1-164-840-81	s	CAP, CHIP CERAMIC 1PF CK 1005
C30	1-164-840-81	s	CAP, CHIP CERAMIC 1PF CK 1005
C31	1-100-670-91	s	CAP, CERAMIC 4.7MF C (2012)
C32	1-100-670-91	s	CAP, CERAMIC 4.7MF C (2012)
C33	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C34	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C35	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C36	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C38	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C40	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C42	1-164-843-81	s	CAP, CHIP CERAMIC 3PF CJ 1005
C44	1-164-843-81	s	CAP, CHIP CERAMIC 3PF CJ 1005
C46	1-125-827-91	s	CAP, CHIP CERAMIC 1MF B
C48	1-125-827-91	s	CAP, CHIP CERAMIC 1MF B
C51	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C52	1-112-300-91	s	CAP, CERAMIC 4.7MF B (2012)
C53	1-135-646-91	s	CAP, CHIP FILM 1MF
C54	1-135-646-91	s	CAP, CHIP FILM 1MF
C57	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C58	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C61	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C62	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C65	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C66	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C69	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C71	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C73	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C74	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C75	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C76	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C77	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C81	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C83	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C84	1-135-646-91	s	CAP, CHIP FILM 1MF
C85	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(PA-343A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C86	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C87	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C88	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C89	1-112-300-91	s	CAP, CERAMIC 4.7MF B (2012)
C95	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C96	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C97	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C100	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C102	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C103	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C104	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C105	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C106	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
D1	6-502-121-01	s	DI MA3J142EGLS0
D4	6-502-146-01	o	DI MA2S7280G8S0
D5	8-719-210-46	s	DIODE EC10QS-06-TE12L
E1	1-535-877-22	s	CHIP, CHECKER
FB1	1-400-334-21	s	FERRITE, EMI (SMD) (1608)
FB2	1-469-122-21	s	FERRITE, EMI (SMD) (1608)
FB3	1-469-122-21	s	FERRITE, EMI (SMD) (1608)
FB4	1-400-334-21	s	FERRITE, EMI (SMD) (1608)
FB5	1-400-334-21	s	FERRITE, EMI (SMD) (1608)
FB6	1-400-334-21	s	FERRITE, EMI (SMD) (1608)
FB7	1-469-122-21	s	FERRITE, EMI (SMD) (1608)
IC5	6-706-863-01	s	IC LMH6732MFX/NOPB
IC7	6-706-863-01	s	IC LMH6732MFX/NOPB
IC10	8-753-240-64	s	IC CXA3647CR-T4
Q1	8-729-809-73	s	TRANSISTOR 2SK536-TB
R10	1-208-863-81	s	RES, CHIP 100 (1005)
R13	1-208-863-81	s	RES, CHIP 100 (1005)
R15	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R16	1-208-935-81	s	RES, CHIP 100K (1005)
R18	1-208-959-81	s	RES, CHIP 1M (1005)
R19	1-208-855-81	s	RES, CHIP 47 (1005)
R20	1-208-927-81	s	RES, CHIP 47K (1005)
R21	1-208-899-81	s	RES, CHIP 3.3K (1005)
R22	1-208-915-81	s	RES, CHIP 15K (1005)
R29	1-208-911-81	s	RES, CHIP 10K (1005)
R32	1-220-870-81	s	RES, CHIP 10 (1005)
R33	1-208-903-81	s	RES, CHIP 4.7K (1005)
R34	1-208-919-81	s	RES, CHIP 22K (1005)
R35	1-208-887-81	s	RES, CHIP 1.0K (1005)
R36	1-208-919-81	s	RES, CHIP 22K (1005)
R37	1-220-878-81	s	RES, CHIP 22 (1005)
R38	1-220-878-81	s	RES, CHIP 22 (1005)
R39	1-208-911-81	s	RES, CHIP 10K (1005)
R40	1-208-911-81	s	RES, CHIP 10K (1005)
R45	1-208-887-81	s	RES, CHIP 1.0K (1005)
R47	1-208-887-81	s	RES, CHIP 1.0K (1005)
R49	1-208-887-81	s	RES, CHIP 1.0K (1005)
R51	1-208-887-81	s	RES, CHIP 1.0K (1005)
R53	1-208-935-81	s	RES, CHIP 100K (1005)
R55	1-208-935-81	s	RES, CHIP 100K (1005)
R57	1-208-879-81	s	RES, CHIP 470 (1005)
R59	1-208-879-81	s	RES, CHIP 470 (1005)
R61	1-208-863-81	s	RES, CHIP 100 (1005)

(PA-343A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R63	1-208-863-81	s	RES, CHIP 100 (1005)
R65	1-208-871-81	s	RES, CHIP 220 (1005)
R67	1-208-871-81	s	RES, CHIP 220 (1005)
R75	1-208-887-81	s	RES, CHIP 1.0K (1005)
R78	1-208-911-81	s	RES, CHIP 10K (1005)
R87	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R88	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R91	1-208-875-81	s	RES, CHIP 330 (1005)
R92	1-208-875-81	s	RES, CHIP 330 (1005)
R95	1-208-911-81	s	RES, CHIP 10K (1005)
R96	1-208-887-81	s	RES, CHIP 1.0K (1005)
R97	1-208-895-81	s	RES, CHIP 2.2K (1005)
R98	1-208-895-81	s	RES, CHIP 2.2K (1005)
R99	1-208-903-81	s	RES, CHIP 4.7K (1005)
R100	1-208-911-81	s	RES, CHIP 10K (1005)
R101	1-208-887-81	s	RES, CHIP 1.0K (1005)
R110	1-220-882-81	s	RES, CHIP 33 (1005)

PA-344 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
C1	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2	1-112-300-91	s	CAP, CERAMIC 4.7MF B (2012)
C3	1-100-816-21	s	CAP, ELECT 33MF (5.6X6.5)
C4	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C6	1-112-300-91	s	CAP, CERAMIC 4.7MF B (2012)
C7	1-100-816-21	s	CAP, ELECT 33MF (5.6X6.5)
C8	1-135-349-21	s	CAP, ELECT 22MF (6.3X6)
C9	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C12	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C14	1-165-629-91	s	CAP, CERAMIC 1000000PF B(3225)
C15	1-165-629-91	s	CAP, CERAMIC 1000000PF B(3225)
C16	1-165-629-91	s	CAP, CERAMIC 1000000PF B(3225)
C17	1-165-629-91	s	CAP, CERAMIC 1000000PF B(3225)
C18	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C19	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C20	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C21	1-112-300-91	s	CAP, CERAMIC 4.7MF B (2012)
C22	1-112-300-91	s	CAP, CERAMIC 4.7MF B (2012)
C23	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C24	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C26	1-112-300-91	s	CAP, CERAMIC 4.7MF B (2012)
C27	1-112-300-91	s	CAP, CERAMIC 4.7MF B (2012)
C28	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C29	1-164-840-81	s	CAP, CHIP CERAMIC 1PF CK 1005
C30	1-164-840-81	s	CAP, CHIP CERAMIC 1PF CK 1005
C31	1-100-670-91	s	CAP, CERAMIC 4.7MF C (2012)
C32	1-100-670-91	s	CAP, CERAMIC 4.7MF C (2012)
C33	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C34	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C35	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C36	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C38	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C40	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C42	1-164-843-81	s	CAP, CHIP CERAMIC 3PF CJ 1005
C44	1-164-843-81	s	CAP, CHIP CERAMIC 3PF CJ 1005
C46	1-125-827-91	s	CAP, CHIP CERAMIC 1MF B
C48	1-125-827-91	s	CAP, CHIP CERAMIC 1MF B
C51	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C52	1-112-300-91	s	CAP, CERAMIC 4.7MF B (2012)
C53	1-135-646-91	s	CAP, CHIP FILM 1MF
C54	1-135-646-91	s	CAP, CHIP FILM 1MF
C57	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C58	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C61	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C62	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C65	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C66	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C69	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C71	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C73	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C74	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C75	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C76	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C77	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C81	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C83	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C84	1-135-646-91	s	CAP, CHIP FILM 1MF
C85	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(PA-344 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C86	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C87	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C88	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C89	1-112-300-91	s	CAP, CERAMIC 4.7MF B (2012)
C95	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C96	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C97	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C100	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C102	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C103	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C104	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C105	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C106	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
D1	6-502-121-01	s	DI MA3J142EGLS0
D4	6-502-146-01	o	DI MA2S7280G8S0
D5	8-719-210-46	s	DIODE EC10QS-06-TE12L
E1	1-535-877-22	s	CHIP, CHECKER
FB1	1-400-334-21	s	FERRITE, EMI (SMD) (1608)
FB2	1-469-122-21	s	FERRITE, EMI (SMD) (1608)
FB3	1-469-122-21	s	FERRITE, EMI (SMD) (1608)
FB4	1-400-334-21	s	FERRITE, EMI (SMD) (1608)
FB5	1-400-334-21	s	FERRITE, EMI (SMD) (1608)
FB6	1-400-334-21	s	FERRITE, EMI (SMD) (1608)
FB7	1-469-122-21	s	FERRITE, EMI (SMD) (1608)
IC4	8-759-346-27	s	IC LM45BIM3X
IC5	6-706-863-01	s	IC LMH6732MFX/NOPB
IC7	6-706-863-01	s	IC LMH6732MFX/NOPB
IC10	8-753-240-64	s	IC CXA3647CR-T4
Q1	8-729-809-73	s	TRANSISTOR 2SK536-TB
R10	1-208-863-81	s	RES, CHIP 100 (1005)
R13	1-208-863-81	s	RES, CHIP 100 (1005)
R15	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R16	1-208-935-81	s	RES, CHIP 100K (1005)
R18	1-208-959-81	s	RES, CHIP 1M (1005)
R19	1-208-855-81	s	RES, CHIP 47 (1005)
R20	1-208-927-81	s	RES, CHIP 47K (1005)
R21	1-208-899-81	s	RES, CHIP 3.3K (1005)
R22	1-208-915-81	s	RES, CHIP 15K (1005)
R29	1-208-911-81	s	RES, CHIP 10K (1005)
R32	1-220-870-81	s	RES, CHIP 10 (1005)
R33	1-208-903-81	s	RES, CHIP 4.7K (1005)
R34	1-208-919-81	s	RES, CHIP 22K (1005)
R35	1-208-887-81	s	RES, CHIP 1.0K (1005)
R36	1-208-919-81	s	RES, CHIP 22K (1005)
R37	1-220-878-81	s	RES, CHIP 22 (1005)
R38	1-220-878-81	s	RES, CHIP 22 (1005)
R39	1-208-911-81	s	RES, CHIP 10K (1005)
R40	1-208-911-81	s	RES, CHIP 10K (1005)
R45	1-208-887-81	s	RES, CHIP 1.0K (1005)
R47	1-208-887-81	s	RES, CHIP 1.0K (1005)
R49	1-208-887-81	s	RES, CHIP 1.0K (1005)
R51	1-208-887-81	s	RES, CHIP 1.0K (1005)
R53	1-208-935-81	s	RES, CHIP 100K (1005)
R55	1-208-935-81	s	RES, CHIP 100K (1005)
R57	1-208-879-81	s	RES, CHIP 470 (1005)
R59	1-208-879-81	s	RES, CHIP 470 (1005)

(PA-344 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R61	1-208-855-81	s	RES, CHIP 47 (1005)
R63	1-208-855-81	s	RES, CHIP 47 (1005)
R75	1-208-887-81	s	RES, CHIP 1.0K (1005)
R78	1-208-911-81	s	RES, CHIP 10K (1005)
R87	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R88	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R91	1-208-875-81	s	RES, CHIP 330 (1005)
R92	1-208-875-81	s	RES, CHIP 330 (1005)
R95	1-208-911-81	s	RES, CHIP 10K (1005)
R96	1-208-887-81	s	RES, CHIP 1.0K (1005)
R97	1-208-895-81	s	RES, CHIP 2.2K (1005)
R98	1-208-895-81	s	RES, CHIP 2.2K (1005)
R99	1-208-903-81	s	RES, CHIP 4.7K (1005)
R100	1-208-911-81	s	RES, CHIP 10K (1005)
R101	1-208-887-81	s	RES, CHIP 1.0K (1005)
R110	1-220-882-81	s	RES, CHIP 33 (1005)

PD-118 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1540-111-A	s	MOUNTED CIRCUIT BOARD, PD-118
C1	1-100-881-91	s	CAP, CERAMIC 47MF C (3216)
C2	1-100-881-91	s	CAP, CERAMIC 47MF C (3216)
C3	1-100-505-91	s	CAP, CERAMIC 0.1MF C (1005)
C5	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C6	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C7	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C8	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C9	1-100-505-91	s	CAP, CERAMIC 0.1MF C (1005)
C10	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C11	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C12	1-125-898-91	s	CAP, CERAMIC 0.22MF B (3216)
C13	1-125-898-91	s	CAP, CERAMIC 0.22MF B (3216)
C14	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C15	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C16	1-100-505-91	s	CAP, CERAMIC 0.1MF C (1005)
C17	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C18	1-100-505-91	s	CAP, CERAMIC 0.1MF C (1005)
C19	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C20	1-100-505-91	s	CAP, CERAMIC 0.1MF C (1005)
C21	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C22	1-100-505-91	s	CAP, CERAMIC 0.1MF C (1005)
C23	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C24	1-100-505-91	s	CAP, CERAMIC 0.1MF C (1005)
C25	1-100-505-91	s	CAP, CERAMIC 0.1MF C (1005)
C28	1-100-505-91	s	CAP, CERAMIC 0.1MF C (1005)
C30	1-162-968-91	s	CAP,CHIP CERAMIC 4700PF B 1608
C31	1-137-980-91	s	CAP,CHIP CERAMIC 0.47MF B 3216
C33	1-100-881-91	s	CAP, CERAMIC 47MF C (3216)
C34	1-100-881-91	s	CAP, CERAMIC 47MF C (3216)
C35	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C36	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C37	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
CN1	1-794-997-21	s	PIN, CONNECTOR 20P
CN2	1-774-261-31	s	CONNECTOR, FFC/FPC(ZIF) AN 24P
CN3	1-815-597-31	s	CONNECTOR, FFC/FPC (ZIF) AN 6P
CN5	1-794-377-21	s	PIN, CONNECTOR 8P
D1	8-719-016-95	s	DIODE 02DZ3.3-TPH3
D2	8-719-938-77	s	DIODE SB05-05C-TB-E
E1	1-535-757-21	s	CHIP, CHECKER
FB1	1-469-122-21	s	FERRITE, EMI (SMD) (1608)
IC1	8-753-213-67	s	IC CXA3662R-T4
IC3	8-759-468-72	s	IC AK6420AM-E2
L1	1-412-951-21	s	INDUCTOR, SMALL TYPE 10UH 2520
L3	1-412-951-21	s	INDUCTOR, SMALL TYPE 10UH 2520
L4	1-416-510-21	s	COIL, CHOKE 100UH
L5	1-469-549-21	s	INDUCTOR, CHIP 1.0UH (LB2016)
Q1	8-729-019-83	s	TRANSISTOR HN1B04FU-YGR-TE85R
Q2	8-729-019-83	s	TRANSISTOR HN1B04FU-YGR-TE85R
Q3	8-729-019-83	s	TRANSISTOR HN1B04FU-YGR-TE85R
Q8	6-551-265-01	s	TRANSISTOR SI2307BDS-T1
R9	1-208-879-81	s	RES, CHIP 470 (1005)
R10	1-208-919-81	s	RES, CHIP 22K (1005)
R12	1-208-935-81	s	RES, CHIP 100K (1005)
R13	1-208-943-81	s	RES, CHIP 220K (1005)

(PD-118 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R14	1-208-935-81	s	RES, CHIP 100K (1005)
R15	1-208-911-81	s	RES, CHIP 10K (1005)
R16	1-208-935-81	s	RES, CHIP 100K (1005)
R17	1-208-863-81	s	RES, CHIP 100 (1005)
R18	1-208-911-81	s	RES, CHIP 10K (1005)
R20	1-208-911-81	s	RES, CHIP 10K (1005)
R21	1-220-870-81	s	RES, CHIP 10 (1005)
R22	1-208-951-81	s	RES, CHIP 470K (1005)
R25	1-208-943-81	s	RES, CHIP 220K (1005)
R26	1-220-870-81	s	RES, CHIP 10 (1005)
R27	1-208-919-81	s	RES, CHIP 22K (1005)
R28	1-208-943-81	s	RES, CHIP 220K (1005)
R29	1-208-951-81	s	RES, CHIP 470K (1005)
R30	1-220-870-81	s	RES, CHIP 10 (1005)
R31	1-208-911-81	s	RES, CHIP 10K (1005)
R32	1-220-870-81	s	RES, CHIP 10 (1005)
R33	1-220-870-81	s	RES, CHIP 10 (1005)
R34	1-208-951-81	s	RES, CHIP 470K (1005)
R35	1-208-951-81	s	RES, CHIP 470K (1005)
R36	1-208-959-81	s	RES, CHIP 1M (1005)
R37	1-220-870-81	s	RES, CHIP 10 (1005)
R38	1-220-870-81	s	RES, CHIP 10 (1005)
R39	1-220-870-81	s	RES, CHIP 10 (1005)
R51	1-208-935-81	s	RES, CHIP 100K (1005)
R52	1-208-935-81	s	RES, CHIP 100K (1005)
R53	1-218-990-81	s	CONDUCTOR, CHIP (1005)

PS-708 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1164-283-A	s	MOUNTED CIRCUIT BOARD, PS-708
C1	1-100-713-11	s	CAP, DOUBLE LAYERS 4.7F
C2	1-100-713-11	s	CAP, DOUBLE LAYERS 4.7F
C3	1-100-713-11	s	CAP, DOUBLE LAYERS 4.7F
C4	1-100-713-11	s	CAP, DOUBLE LAYERS 4.7F
R1	1-208-911-81	s	RES, CHIP 10K (1005)
R2	1-208-911-81	s	RES, CHIP 10K (1005)
R3	1-208-911-81	s	RES, CHIP 10K (1005)
R4	1-208-911-81	s	RES, CHIP 10K (1005)

PS-731 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1540-112-A	s	MOUNTED CIRCUIT BOARD, PS-731
C1	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C2	1-164-227-91	s	CAP,CERAMIC 22000PF B 1608
C3	1-164-227-91	s	CAP,CERAMIC 22000PF B 1608
C4	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C5	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C6	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C7	1-162-919-91	s	CAP, CERAMIC 22PF CH 1608
C8	1-127-715-91	s	CAP,CHIP CERAMIC 0.22MF B 1608
C9	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C10	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C11	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C12	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C13	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C14	1-135-348-21	s	CAP, ELECT 150MF (10X8)
C15	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C16	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C17	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C18	1-115-340-91	s	CAP, CERAMIC 0.22MF B (2012)
C20	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3225
C22	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C23	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C26	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C28	1-164-934-81	s	CAP, CHIP CERAMIC 330PF B 1005
C29	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C30	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
CN1	1-774-297-21	s	PIN, CONNECTOR (PC BOARD) 7P
CN2	1-750-005-21	o	PIN, CONNECTOR (PC BOARD) 4P
D1	6-501-124-01	s	DIODE RSX101VA-30TR
D2	6-501-124-01	s	DIODE RSX101VA-30TR
D7	8-719-083-15	s	DIODE 1SS389(TPH3)
FL1	1-400-065-21	s	FILTER, EMI REMOVAL (SMD)
FL2	1-400-065-21	s	FILTER, EMI REMOVAL (SMD)
FL3	1-400-065-21	s	FILTER, EMI REMOVAL (SMD)
IC1	6-701-652-01	s	IC MAX4374TEUB+TG069
IC3	8-759-488-34	s	IC TLV2221CDBV
L1	1-400-300-11	s	COIL, CHOKE
L2	1-469-549-21	s	INDUCTOR, CHIP 1.0UH (LB2016)
L3	1-469-060-21	s	INDUCTOR
L4	1-469-549-21	s	INDUCTOR, CHIP 1.0UH (LB2016)
Q1	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q2	8-729-141-76	s	TRANSISTOR 2SD596T1-DV345
Q3	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q5	6-551-144-01	s	TRANSISTOR HAT2198R-EL-E
Q6	6-551-144-01	s	TRANSISTOR HAT2198R-EL-E
Q7	8-729-928-82	s	TRANSISTOR DTC144EE-TL
R2	1-208-911-81	s	RES, CHIP 10K (1005)
R4	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R5	1-208-951-81	s	RES, CHIP 470K (1005)
R6	1-208-911-81	s	RES, CHIP 10K (1005)
R7	1-208-855-81	s	RES, CHIP 47 (1005)
R8	1-208-887-81	s	RES, CHIP 1.0K (1005)
R9	1-208-935-81	s	RES, CHIP 100K (1005)
R10	1-219-684-21	s	RES, CHIP (SQUARE TYPE) 0.01
R12	1-208-887-81	s	RES, CHIP 1.0K (1005)
R13	1-208-911-81	s	RES, CHIP 10K (1005)

(PS-731 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R14	1-208-895-81	s	RES, CHIP 2.2K (1005)
R15	1-208-895-81	s	RES, CHIP 2.2K (1005)
R16	1-208-935-81	s	RES, CHIP 100K (1005)
R17	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R19	1-208-927-81	s	RES, CHIP 47K (1005)
R20	1-208-927-81	s	RES, CHIP 47K (1005)
R22	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R23	1-219-684-21	s	RES, CHIP (SQUARE TYPE) 0.01
R24	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R28	1-208-911-81	s	RES, CHIP 10K (1005)
R29	1-211-977-91	s	RES, CHIP 22 (1608)
R30	1-211-977-91	s	RES, CHIP 22 (1608)
R32	1-218-989-81	s	RES, CHIP 1M
R33	1-208-911-81	s	RES, CHIP 10K (1005)
R34	1-208-935-81	s	RES, CHIP 100K (1005)

RE-246 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1538-887-A	s	MOUNTED CIRCUIT BOARD, RE-246
1pc	7-623-507-01	s	LUG, 2.6
C1	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C3	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C4	1-162-923-91	s	CAP, CERAMIC 47PF CH 1608
C5	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C6	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C7	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C8	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C9	1-164-227-91	s	CAP,CERAMIC 22000PF B 1608
C10	1-164-227-91	s	CAP,CERAMIC 22000PF B 1608
C11	1-162-969-91	s	CAP, CERAMIC 6800PF B 1608
C12	1-162-969-91	s	CAP, CERAMIC 6800PF B 1608
C13	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C14	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C15	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C16	1-164-227-91	s	CAP,CERAMIC 22000PF B 1608
C17	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C19	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C20	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C21	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C22	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C23	1-112-784-11	s	CAP, ELECT(SOLID)
C24	1-112-785-11	s	CAP, ELECT(SOLID)
C25	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C26	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C27	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C28	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C29	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C30	1-162-923-91	s	CAP, CERAMIC 47PF CH 1608
C31	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C32	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C33	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C34	1-164-227-91	s	CAP,CERAMIC 22000PF B 1608
C35	1-164-227-91	s	CAP,CERAMIC 22000PF B 1608
C36	1-162-969-91	s	CAP, CERAMIC 6800PF B 1608
C37	1-162-969-91	s	CAP, CERAMIC 6800PF B 1608
C38	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C39	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C40	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C41	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C42	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C44	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C45	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C46	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C47	1-112-784-11	s	CAP, ELECT(SOLID)
C48	1-112-784-11	s	CAP, ELECT(SOLID)
C51	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C52	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C53	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C54	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C57	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C58	1-162-923-91	s	CAP, CERAMIC 47PF CH 1608
C59	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C60	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C61	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C62	1-164-227-91	s	CAP,CERAMIC 22000PF B 1608
C63	1-164-227-91	s	CAP,CERAMIC 22000PF B 1608

(RE-246 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C64	1-162-969-91	s	CAP, CERAMIC 6800PF B 1608
C65	1-162-969-91	s	CAP, CERAMIC 6800PF B 1608
C66	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C67	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C68	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C69	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C70	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C71	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C72	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C73	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C74	1-114-509-11	s	CAP, ELECT 150MF (6.3X7.7)
C75	1-114-509-11	s	CAP, ELECT 150MF (6.3X7.7)
C76	1-100-672-91	s	CAP, CERAMIC 10MF C (3216)
C77	1-100-672-91	s	CAP, CERAMIC 10MF C (3216)
C78	1-100-672-91	s	CAP, CERAMIC 10MF C (3216)
C79	1-100-672-91	s	CAP, CERAMIC 10MF C (3216)
C80	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C81	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C82	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C83	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C84	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C85	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C100	1-165-875-91	s	CAP, CHIP CERAMIC 10MF B 3216
C101	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C102	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C103	1-165-875-91	s	CAP, CHIP CERAMIC 10MF B 3216
C104	1-164-933-81	s	CAP, CHIP CERAMIC 220PF B 1005
C105	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C106	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C107	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C108	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C109	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C110	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C111	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C112	1-165-629-91	s	CAP, CERAMIC 1000000PF B(3225)
C113	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C114	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C115	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C116	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C117	1-114-112-11	s	CAP, ELECT 100MF (6.3X7.7)
C118	1-112-833-11	o	CAP, ELECT 68MF/16V (6.3X5.8)
C119	1-165-629-91	s	CAP, CERAMIC 1000000PF B(3225)
C120	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C121	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C122	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C123	1-165-629-91	s	CAP, CERAMIC 1000000PF B(3225)
C124	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C125	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C126	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C127	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C128	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C129	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C130	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C133	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C135	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C136	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C138	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C142	1-112-784-11	s	CAP, ELECT(SOLID)
C143	1-165-629-91	s	CAP, CERAMIC 1000000PF B(3225)

(RE-246 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C144	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C145	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C146	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C147	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C148	1-114-509-11	s	CAP, ELECT 150MF (6.3X7.7)
C149	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C150	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C151	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C152	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C153	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C154	1-104-503-92	s	CAP, CERAMIC 100000PF X7R 3225
D1	8-719-938-77	s	DIODE SB05-05C-TB-E
D2	8-719-938-77	s	DIODE SB05-05C-TB-E
D3	8-719-938-77	s	DIODE SB05-05C-TB-E
D4	8-719-938-77	s	DIODE SB05-05C-TB-E
D6	8-719-938-77	s	DIODE SB05-05C-TB-E
D7	8-719-938-77	s	DIODE SB05-05C-TB-E
D8	6-501-817-01	s	DIODE MA2J1110GLS0
D9	6-501-817-01	s	DIODE MA2J1110GLS0
D11	6-501-817-01	s	DIODE MA2J1110GLS0
D12	6-501-817-01	s	DIODE MA2J1110GLS0
D100	8-719-072-43	s	DIODE RB050L-40TE25
D101	8-719-072-43	s	DIODE RB050L-40TE25
D102	8-719-072-43	s	DIODE RB050L-40TE25
D104	8-719-072-43	s	DIODE RB050L-40TE25
D105	8-719-072-43	s	DIODE RB050L-40TE25
D106	8-719-069-28	s	DIODE 1SS400TE-61
D108	8-719-069-28	s	DIODE 1SS400TE-61
D109	8-719-069-28	s	DIODE 1SS400TE-61
D110	8-719-069-28	s	DIODE 1SS400TE-61
D111	8-719-072-43	s	DIODE RB050L-40TE25
D112	8-719-072-43	s	DIODE RB050L-40TE25
FB100	1-400-580-21	s	FERRITE, EMI (SMD)
FB101	1-400-580-21	s	FERRITE, EMI (SMD)
FB102	1-400-580-21	s	FERRITE, EMI (SMD)
FB103	1-400-580-21	s	FERRITE, EMI (SMD)
FB104	1-400-580-21	s	FERRITE, EMI (SMD)
FB105	1-400-580-21	s	FERRITE, EMI (SMD)
FB108	1-416-976-21	s	FERRITE, EMI (SMD) (3216)
FB109	1-400-580-21	s	FERRITE, EMI (SMD)
FB110	1-400-580-21	s	FERRITE, EMI (SMD)
FB111	1-400-580-21	s	FERRITE, EMI (SMD)
IC1	6-707-828-01	s	IC MM1431ANRE
IC2	6-702-510-01	s	IC TPS5120DBTRG4
IC3	6-704-643-01	s	IC R3112N221A-TR-FA
IC4	6-702-510-01	s	IC TPS5120DBTRG4
IC6	8-759-338-95	s	IC NJM2903V(TE2)
IC7	6-702-510-01	s	IC TPS5120DBTRG4
IC8	6-707-864-01	s	IC TC74VHC123AFT(EKJ)
IC9	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC100	8-759-669-64	s	IC TL1451ACPWR-12
IC101	6-705-480-01	s	IC LT3467ES6#TR
IC102	6-705-480-01	s	IC LT3467ES6#TR
IC104	6-711-266-01	s	IC MP1593DN-LF
IC105	6-711-266-01	s	IC MP1593DN-LF
L1	1-456-046-21	s	COIL, CHOKE (SMD) 10UH(10X10)
L2	1-456-046-21	s	COIL, CHOKE (SMD) 10UH(10X10)

(RE-246 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
L6	1-481-180-21	s	INDUCTOR 10UH
L7	1-481-180-21	s	INDUCTOR 10UH
L11	1-456-046-21	s	COIL, CHOKE (SMD) 10UH(10X10)
L12	1-416-606-21	s	COIL, CHOKE (SMD) 47UH
L100	1-456-046-21	s	COIL, CHOKE (SMD) 10UH(10X10)
L101	1-456-046-21	s	COIL, CHOKE (SMD) 10UH(10X10)
L102	1-456-046-21	s	COIL, CHOKE (SMD) 10UH(10X10)
L103	1-419-630-21	s	COIL, CHOKE 4.7UH
L105	1-416-511-21	s	COIL, CHOKE 47.0UH
L106	1-416-344-21	s	COIL, CHOKE 10UH
L114	1-456-046-21	s	COIL, CHOKE (SMD) 10UH(10X10)
PS100	⚠ 1-576-677-21	s	RINK, IC (4A/72V)
Q1	6-551-736-01	s	TRANSISTOR FDS6690AS
Q2	6-551-736-01	s	TRANSISTOR FDS6690AS
Q3	8-729-929-27	s	TRANSISTOR DTC114TE-TL
Q4	8-729-929-27	s	TRANSISTOR DTC114TE-TL
Q5	8-729-929-27	s	TRANSISTOR DTC114TE-TL
Q6	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q7	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q8	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q9	6-552-008-01	s	TR IRF8113TRPBF
Q10	6-552-008-01	s	TR IRF8113TRPBF
Q11	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q12	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q13	8-729-929-27	s	TRANSISTOR DTC114TE-TL
Q14	8-729-929-27	s	TRANSISTOR DTC114TE-TL
Q15	8-729-929-27	s	TRANSISTOR DTC114TE-TL
Q16	6-551-736-01	s	TRANSISTOR FDS6690AS
Q17	6-551-736-01	s	TRANSISTOR FDS6690AS
Q19	8-729-046-04	s	TRANSISTOR FDS6690A
Q20	8-729-046-04	s	TRANSISTOR FDS6690A
Q21	8-729-929-27	s	TRANSISTOR DTC114TE-TL
Q22	8-729-929-27	s	TRANSISTOR DTC114TE-TL
Q23	8-729-929-27	s	TRANSISTOR DTC114TE-TL
Q24	6-552-009-01	s	TR IRF7821TRPBF
Q25	6-552-009-01	s	TR IRF7821TRPBF
Q26	8-729-046-04	s	TRANSISTOR FDS6690A
Q27	8-729-046-04	s	TRANSISTOR FDS6690A
Q100	6-551-662-01	s	TRANSISTOR SI4431BDY-T1-E3
Q101	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q102	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q103	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q104	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q106	8-729-929-27	s	TRANSISTOR DTC114TE-TL
Q111	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q112	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q121	8-729-928-28	s	TRANSISTOR DTA144EE-TL
R1	1-208-919-81	s	RES, CHIP 22K (1005)
R2	1-208-923-81	s	RES, CHIP 33K (1005)
R3	1-208-907-81	s	RES, CHIP 6.8K (1005)
R4	1-208-907-81	s	RES, CHIP 6.8K (1005)
R5	1-208-907-81	s	RES, CHIP 6.8K (1005)
R6	1-208-911-81	s	RES, CHIP 10K (1005)
R7	1-208-903-81	s	RES, CHIP 4.7K (1005)
R8	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R9	1-208-895-81	s	RES, CHIP 2.2K (1005)
R10	1-208-863-81	s	RES, CHIP 100 (1005)

(RE-246 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R11	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R12	1-208-899-81	s	RES, CHIP 3.3K (1005)
R14	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R15	1-208-923-81	s	RES, CHIP 33K (1005)
R16	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R17	1-208-893-81	s	RES, CHIP 1.8K (1005)
R18	1-208-863-81	s	RES, CHIP 100 (1005)
R19	1-208-863-81	s	RES, CHIP 100 (1005)
R20	1-208-907-81	s	RES, CHIP 6.8K (1005)
R21	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R22	1-208-895-81	s	RES, CHIP 2.2K (1005)
R23	1-208-895-81	s	RES, CHIP 2.2K (1005)
R24	1-208-903-81	s	RES, CHIP 4.7K (1005)
R25	1-208-919-81	s	RES, CHIP 22K (1005)
R26	1-208-911-81	s	RES, CHIP 10K (1005)
R27	1-208-911-81	s	RES, CHIP 10K (1005)
R28	1-208-911-81	s	RES, CHIP 10K (1005)
R29	1-208-911-81	s	RES, CHIP 10K (1005)
R30	1-208-919-81	s	RES, CHIP 22K (1005)
R31	1-208-911-81	s	RES, CHIP 10K (1005)
R32	1-208-923-81	s	RES, CHIP 33K (1005)
R33	1-208-935-81	s	RES, CHIP 100K (1005)
R34	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R35	1-208-895-81	s	RES, CHIP 2.2K (1005)
R36	1-208-883-81	s	RES, CHIP 680 (1005)
R37	1-208-911-81	s	RES, CHIP 10K (1005)
R38	1-220-870-81	s	RES, CHIP 10 (1005)
R39	1-208-895-81	s	RES, CHIP 2.2K (1005)
R40	1-208-895-81	s	RES, CHIP 2.2K (1005)
R41	1-220-870-81	s	RES, CHIP 10 (1005)
R42	1-208-911-81	s	RES, CHIP 10K (1005)
R43	1-208-911-81	s	RES, CHIP 10K (1005)
R44	1-208-911-81	s	RES, CHIP 10K (1005)
R45	1-208-911-81	s	RES, CHIP 10K (1005)
R47	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R48	1-208-895-81	s	RES, CHIP 2.2K (1005)
R49	1-208-863-81	s	RES, CHIP 100 (1005)
R50	1-208-863-81	s	RES, CHIP 100 (1005)
R51	1-208-895-81	s	RES, CHIP 2.2K (1005)
R52	1-208-911-81	s	RES, CHIP 10K (1005)
R53	1-208-911-81	s	RES, CHIP 10K (1005)
R54	1-208-911-81	s	RES, CHIP 10K (1005)
R55	1-208-911-81	s	RES, CHIP 10K (1005)
R56	1-208-923-81	s	RES, CHIP 33K (1005)
R57	1-208-911-81	s	RES, CHIP 10K (1005)
R58	1-208-895-81	s	RES, CHIP 2.2K (1005)
R59	1-208-911-81	s	RES, CHIP 10K (1005)
R60	1-208-923-81	s	RES, CHIP 33K (1005)
R61	1-208-895-81	s	RES, CHIP 2.2K (1005)
R62	1-220-870-81	s	RES, CHIP 10 (1005)
R63	1-208-911-81	s	RES, CHIP 10K (1005)
R64	1-208-911-81	s	RES, CHIP 10K (1005)
R65	1-220-870-81	s	RES, CHIP 10 (1005)
R66	1-208-899-81	s	RES, CHIP 3.3K (1005)
R67	1-208-899-81	s	RES, CHIP 3.3K (1005)
R68	1-208-951-81	s	RES, CHIP 470K (1005)
R69	1-208-927-81	s	RES, CHIP 47K (1005)
R74	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R75	1-208-895-81	s	RES, CHIP 2.2K (1005)

(RE-246 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R76	1-208-863-81	s	RES, CHIP 100 (1005)
R77	1-208-863-81	s	RES, CHIP 100 (1005)
R78	1-208-883-81	s	RES, CHIP 680 (1005)
R79	1-208-907-81	s	RES, CHIP 6.8K (1005)
R80	1-208-911-81	s	RES, CHIP 10K (1005)
R81	1-208-911-81	s	RES, CHIP 10K (1005)
R82	1-208-911-81	s	RES, CHIP 10K (1005)
R83	1-208-923-81	s	RES, CHIP 33K (1005)
R84	1-208-911-81	s	RES, CHIP 10K (1005)
R85	1-208-923-81	s	RES, CHIP 33K (1005)
R86	1-208-911-81	s	RES, CHIP 10K (1005)
R87	1-208-923-81	s	RES, CHIP 33K (1005)
R88	1-208-923-81	s	RES, CHIP 33K (1005)
R89	1-220-870-81	s	RES, CHIP 10 (1005)
R90	1-208-907-81	s	RES, CHIP 6.8K (1005)
R91	1-208-875-81	s	RES, CHIP 330 (1005)
R92	1-220-870-81	s	RES, CHIP 10 (1005)
R93	1-208-911-81	s	RES, CHIP 10K (1005)
R94	1-208-903-81	s	RES, CHIP 4.7K (1005)
R96	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R98	1-208-927-81	s	RES, CHIP 47K (1005)
R99	1-208-927-81	s	RES, CHIP 47K (1005)
R100	1-208-935-81	s	RES, CHIP 100K (1005)
R101	1-208-935-81	s	RES, CHIP 100K (1005)
R102	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R103	1-208-943-81	s	RES, CHIP 220K (1005)
R104	1-208-911-81	s	RES, CHIP 10K (1005)
R105	1-208-887-81	s	RES, CHIP 1.0K (1005)
R106	1-208-887-81	s	RES, CHIP 1.0K (1005)
R107	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R108	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R109	1-208-931-81	s	RES, CHIP 68K (1005)
R110	1-208-899-81	s	RES, CHIP 3.3K (1005)
R111	1-208-911-81	s	RES, CHIP 10K (1005)
R112	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R113	1-208-903-81	s	RES, CHIP 4.7K (1005)
R114	1-208-903-81	s	RES, CHIP 4.7K (1005)
R115	1-208-943-81	s	RES, CHIP 220K (1005)
R116	1-208-903-81	s	RES, CHIP 4.7K (1005)
R117	1-208-943-81	s	RES, CHIP 220K (1005)
R118	1-208-915-81	s	RES, CHIP 15K (1005)
R119	1-208-903-81	s	RES, CHIP 4.7K (1005)
R120	1-208-895-81	s	RES, CHIP 2.2K (1005)
R121	1-208-899-81	s	RES, CHIP 3.3K (1005)
R122	1-208-871-81	s	RES, CHIP 220 (1005)
R123	1-208-923-81	s	RES, CHIP 33K (1005)
R124	1-208-911-81	s	RES, CHIP 10K (1005)
R125	1-208-923-81	s	RES, CHIP 33K (1005)
R126	1-208-911-81	s	RES, CHIP 10K (1005)
R129	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R130	1-208-911-81	s	RES, CHIP 10K (1005)
R131	1-218-855-91	s	RES, CHIP 2.2K (1608)
R132	1-218-855-91	s	RES, CHIP 2.2K (1608)
R133	1-208-935-81	s	RES, CHIP 100K (1005)
R142	1-220-870-81	s	RES, CHIP 10 (1005)
R143	1-208-915-81	s	RES, CHIP 15K (1005)
R144	1-208-911-81	s	RES, CHIP 10K (1005)
R147	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R148	1-208-919-81	s	RES, CHIP 22K (1005)

(RE-246 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R149	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R150	1-208-931-81	s	RES, CHIP 68K (1005)
R151	1-208-911-81	s	RES, CHIP 10K (1005)
R152	1-208-895-81	s	RES, CHIP 2.2K (1005)
R153	1-208-911-81	s	RES, CHIP 10K (1005)
R154	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R155	1-208-935-81	s	RES, CHIP 100K (1005)
R156	1-208-911-81	s	RES, CHIP 10K (1005)
R157	1-208-927-81	s	RES, CHIP 47K (1005)
R158	1-208-927-81	s	RES, CHIP 47K (1005)
R159	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R160	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R161	1-208-919-81	s	RES, CHIP 22K (1005)
R162	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R163	1-208-935-81	s	RES, CHIP 100K (1005)
R164	1-208-919-81	s	RES, CHIP 22K (1005)
R165	1-208-911-81	s	RES, CHIP 10K (1005)
R166	1-208-911-81	s	RES, CHIP 10K (1005)
R167	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R168	1-208-927-81	s	RES, CHIP 47K (1005)
R169	1-208-927-81	s	RES, CHIP 47K (1005)
R170	1-218-990-81	s	CONDUCTOR, CHIP (1005)

RM-216 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1540-121-A	s	MOUNTED CIRCUIT BOARD, RM-216
CN2	1-766-696-11	o	CONNECTOR, ROUND TYPE 8P
FB1	1-400-832-21	s	SMD EMI FERRITE
FB2	1-400-832-21	s	SMD EMI FERRITE
FB3	1-400-832-21	s	SMD EMI FERRITE
FB4	1-400-832-21	s	SMD EMI FERRITE
FB8	1-414-445-21	s	FERRITE, EMI (SMD) (1608)
FL1	1-400-065-21	s	FILTER, EMI REMOVAL (SMD)
FL2	1-400-065-21	s	FILTER, EMI REMOVAL (SMD)
R1	1-218-990-81	s	CONDUCTOR, CHIP (1005)

RX-101 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1540-094-A	s	MOUNTED CIRCUIT BOARD, RX-101
C1	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4	1-112-021-91	s	CAP, CERAMIC 2.2MF C (1608)
C5	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C6	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C7	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C8	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C10	1-112-021-91	s	CAP, CERAMIC 2.2MF C (1608)
C11	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C12	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C13	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C14	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
CN2	1-774-261-31	s	CONNECTOR, FFC/FPC(ZIF) AN 24P
IC1	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC2	8-759-698-08	s	IC SN74CBTLV1G125DCKR
IC3	8-759-698-08	s	IC SN74CBTLV1G125DCKR
IC4	8-759-698-08	s	IC SN74CBTLV1G125DCKR
IC5	8-759-698-08	s	IC SN74CBTLV1G125DCKR
IC6	6-706-484-01	s	IC TC7SH04FU(T5RSOYJF)
IC7	8-759-422-21	s	IC NJM4580V(TE2)
IC8	8-759-422-21	s	IC NJM4580V(TE2)
L1	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L2	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
R1	1-208-911-81	s	RES, CHIP 10K (1005)
R3	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4	1-208-891-81	s	RES, CHIP 1.5K (1005)
R5	1-208-895-81	s	RES, CHIP 2.2K (1005)
R6	1-208-871-81	s	RES, CHIP 220 (1005)
R7	1-208-875-81	s	RES, CHIP 330 (1005)
R8	1-208-895-81	s	RES, CHIP 2.2K (1005)
R9	1-208-891-81	s	RES, CHIP 1.5K (1005)
R10	1-208-887-81	s	RES, CHIP 1.0K (1005)
R11	1-208-911-81	s	RES, CHIP 10K (1005)
R13	1-208-887-81	s	RES, CHIP 1.0K (1005)
R14	1-208-891-81	s	RES, CHIP 1.5K (1005)
R15	1-208-895-81	s	RES, CHIP 2.2K (1005)
R16	1-208-871-81	s	RES, CHIP 220 (1005)
R17	1-208-875-81	s	RES, CHIP 330 (1005)
R18	1-208-895-81	s	RES, CHIP 2.2K (1005)
R19	1-208-891-81	s	RES, CHIP 1.5K (1005)
R20	1-208-887-81	s	RES, CHIP 1.0K (1005)
R21	1-208-935-81	s	RES, CHIP 100K (1005)
R23	1-208-935-81	s	RES, CHIP 100K (1005)
R24	1-220-878-81	s	RES, CHIP 22 (1005)
R25	1-220-878-81	s	RES, CHIP 22 (1005)
R26	1-208-935-81	s	RES, CHIP 100K (1005)
R27	1-208-935-81	s	RES, CHIP 100K (1005)
R28	1-220-878-81	s	RES, CHIP 22 (1005)
R31	1-220-878-81	s	RES, CHIP 22 (1005)
RB1	1-234-370-21	s	RES, NETWORK 22 (1005X4)

SE-709 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8347-272-A	s	MOUNTED CIRCUIT BOARD, SE-709
C1	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
CN1	1-764-093-21	o	PIN, CONNECTOR (PC BOARD) 8P
CN2	1-580-055-21	o	PIN, CONNECTOR (SMD) 2P
PH1	8-719-988-19	s	PHTO REFLECTOR PR-11-C-T
PH2	8-719-988-19	s	PHTO REFLECTOR PR-11-C-T
PH3	8-719-988-19	s	PHTO REFLECTOR PR-11-C-T
PH4	8-719-988-19	s	PHTO REFLECTOR PR-11-C-T
R1	1-208-879-81	s	RES, CHIP 470 (1005)
R2	1-208-879-81	s	RES, CHIP 470 (1005)
R3	1-208-879-81	s	RES, CHIP 470 (1005)
R4	1-208-879-81	s	RES, CHIP 470 (1005)
R5	1-208-935-81	s	RES, CHIP 100K (1005)
R6	1-208-935-81	s	RES, CHIP 100K (1005)
R7	1-208-935-81	s	RES, CHIP 100K (1005)
R8	1-208-935-81	s	RES, CHIP 100K (1005)

SE-803 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1091-734-A	s	MOUNTED CIRCUIT BOARD, SE-803
C1	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
CN1	1-573-806-21	s	PIN, CONNECTOR (1.5MM) (SMD)6P
PH1	6-600-300-01	s	IC NJL5901R (TE1)
PH2	6-600-300-01	s	IC NJL5901R (TE1)
PH3	6-600-300-01	s	IC NJL5901R (TE1)
PH4	6-600-300-01	s	IC NJL5901R (TE1)
Q1	8-729-929-27	s	TRANSISTOR DTC114TE-TL
Q2	8-729-929-27	s	TRANSISTOR DTC114TE-TL
Q3	8-729-929-27	s	TRANSISTOR DTC114TE-TL
Q4	8-729-929-27	s	TRANSISTOR DTC114TE-TL
R1	1-218-839-91	s	RES, CHIP 470 (1608)
R2	1-218-839-91	s	RES, CHIP 470 (1608)
R3	1-218-839-91	s	RES, CHIP 470 (1608)
R4	1-218-839-91	s	RES, CHIP 470 (1608)
R5	1-208-911-81	s	RES, CHIP 10K (1005)
R6	1-208-911-81	s	RES, CHIP 10K (1005)
R7	1-208-911-81	s	RES, CHIP 10K (1005)
R8	1-208-911-81	s	RES, CHIP 10K (1005)

SE-857 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1366-119-A	s	MOUNTED CIRCUIT BOARD, SE-857
C1	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C3	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C4	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5	1-117-949-81	s	CAP, CHIP CERAMIC 820PF B1005
C6	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C7	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C8	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C9	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C12	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C518	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C519	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C520	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C521	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C522	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C523	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C524	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
CN1	1-580-056-21	s	PIN, CONNECTOR (SMD) 3P
CN4	1-580-055-21	o	PIN, CONNECTOR (SMD) 2P
CN709	1-764-082-21	s	PIN, CONNECTOR (PC BOARD) 11P
CN1125	1-774-873-61	s	CONNECTOR, FPC 6P
D501	8-719-024-71	s	DIODE 1SS362-TE85L
IC4	6-702-168-01	s	IC AK6512CM-E2
IC505	6-702-762-01	s	IC TC75S58FE(TE85R)
R1	1-245-604-81	s	RES, CHIP 10M (1005)
R2	1-208-911-81	s	RES, CHIP 10K (1005)
R3	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4	1-208-923-81	s	RES, CHIP 33K (1005)
R5	1-208-931-81	s	RES, CHIP 68K (1005)
R6	1-208-863-81	s	RES, CHIP 100 (1005)
R509	1-208-887-81	s	RES, CHIP 1.0K (1005)
R510	1-208-887-81	s	RES, CHIP 1.0K (1005)
R511	1-208-903-81	s	RES, CHIP 4.7K (1005)
R512	1-208-903-81	s	RES, CHIP 4.7K (1005)
R513	1-208-903-81	s	RES, CHIP 4.7K (1005)
R514	1-208-903-81	s	RES, CHIP 4.7K (1005)
R515	1-208-927-81	s	RES, CHIP 47K (1005)
R516	1-208-919-81	s	RES, CHIP 22K (1005)
R517	1-208-911-81	s	RES, CHIP 10K (1005)
R518	1-208-903-81	s	RES, CHIP 4.7K (1005)
R519	1-208-947-81	s	RES, CHIP 330K (1005)
R520	1-208-911-81	s	RES, CHIP 10K (1005)
R521	1-208-887-81	s	RES, CHIP 1.0K (1005)
RB1	1-234-377-21	s	RES, NETWORK 4.7K (1005X4)
S1	1-762-805-41	s	SWITCH, PUSH (1 KEY)
S2	1-762-805-41	s	SWITCH, PUSH (1 KEY)
S3	1-762-805-41	s	SWITCH, PUSH (1 KEY)
VS1	1-479-022-71	s	SENSOR, ANGULAR VELOCITY
VS2	1-479-022-81	s	SENSOR, ANGULAR VELOCITY

SE-858 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1366-120-A	s	MOUNTED CIRCUIT BOARD, SE-858
CN1	1-817-054-21	s	PIN, CONNECTOR 6P
CN2	1-580-055-21	o	PIN, CONNECTOR (SMD) 2P
PH1	8-719-069-53	s	DIODE CPI-210-T
PH2	8-719-069-53	s	DIODE CPI-210-T
R1	1-208-879-81	s	RES, CHIP 470 (1005)
R2	1-208-879-81	s	RES, CHIP 470 (1005)
S3	1-762-805-41	s	SWITCH, PUSH (1 KEY)
S4	1-762-805-41	s	SWITCH, PUSH (1 KEY)

SW-1125G BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1138-489-A	s	MOUNTED CIRCUIT BOARD, SW-1125G
CN1	1-774-873-61	s	CONNECTOR, FPC 6P
S1	⚠ 1-572-288-21	s	SWITCH, PUSH
S2	⚠ 1-762-805-41	s	SWITCH, PUSH (1 KEY)

SW-1249 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1164-298-A	s	MOUNTED CIRCUIT BOARD, SW-1249
C1	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C2	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
CN1	1-580-056-21	s	PIN, CONNECTOR (SMD) 3P
R1	1-218-847-91	s	RES, CHIP 1.0K (1608)
R2	1-218-847-91	s	RES, CHIP 1.0K (1608)
S1	1-771-348-11	s	SWITCH, TACTILE
S2	1-771-348-11	s	SWITCH, TACTILE

SW-1352 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1540-133-A	s	MOUNTED CIRCUIT BOARD, SW-1352
S1	1-571-422-11	s	SWITCH, TOGGLE
S2	1-571-422-11	s	SWITCH, TOGGLE

SW-1385 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1317-214-A	s	MOUNTED CIRCUIT BOARD, SW-1385
C5	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C6	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C8	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C9	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C10	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
CN1	1-695-320-21	o	PIN, CONNECTOR (1.5MM)(SMD) 2P
CN2	1-691-551-21	o	PIN, CONNECTOR (SMD) 8P
D1	8-719-048-98	s	DIODE RB160L-40TE25
PH1	8-719-069-53	s	DIODE CPI-210-T
PH2	8-719-069-53	s	DIODE CPI-210-T
PS1	⚠ 1-576-677-21	s	RINK, IC (4A/72V)
Q5	6-551-265-01	s	TRANSISTOR SI2307BDS-T1
Q6	6-550-980-01	s	TRANSISTOR RN1904(T5RSONY,D,F)
R2	1-208-935-81	s	RES, CHIP 100K (1005)
R3	1-208-919-81	s	RES, CHIP 22K (1005)
R4	1-208-935-81	s	RES, CHIP 100K (1005)
R6	1-208-875-81	s	RES, CHIP 330 (1005)
R8	1-208-919-81	s	RES, CHIP 22K (1005)
R12	1-208-919-81	s	RES, CHIP 22K (1005)

SW-1391 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1540-101-A	s	MOUNTED CIRCUIT BOARD, SW-1391
1pc	3-629-459-03	o	PLATE,GROUND
1pc	3-855-938-01	s	SCREW
C1	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C2	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C3	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C4	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
CN1	1-565-884-11	o	PIN, CONNECTOR (PC BOARD) 12P
R1	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R2	1-216-864-91	s	CONDUCTOR, CHIP (1608)
S1	1-762-001-21	s	SWITCH, TOGGLE
S2	1-762-000-21	s	SWITCH, TOGGLE
S3	1-762-000-21	s	SWITCH, TOGGLE
S4	1-762-000-21	s	SWITCH, TOGGLE
S5	1-762-488-21	s	SWITCH, TOGGLE
S6	1-762-019-21	s	SWITCH, TOGGLE

SW-1425 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1540-980-A	s	MOUNTED CIRCUIT BOARD, SW-1425
C1	1-162-964-91	s	CAP,CHIP CERAMIC 1000PF B 1608
C2	1-162-964-91	s	CAP,CHIP CERAMIC 1000PF B 1608
C3	1-162-964-91	s	CAP,CHIP CERAMIC 1000PF B 1608
C4	1-162-927-91	s	CAP, CERAMIC 100PF CH 1608
C5	1-162-927-91	s	CAP, CERAMIC 100PF CH 1608
C6	1-162-927-91	s	CAP, CERAMIC 100PF CH 1608
C7	1-162-927-91	s	CAP, CERAMIC 100PF CH 1608
C8	1-162-927-91	s	CAP, CERAMIC 100PF CH 1608
CN1	1-766-376-21	s	PIN, CONNECTOR (1.5MM)(SMD) 9P
R1	1-218-823-91	s	RES, CHIP 100 (1608)
R2	1-218-847-91	s	RES, CHIP 1.0K (1608)
R3	1-218-847-91	s	RES, CHIP 1.0K (1608)
R4	1-218-847-91	s	RES, CHIP 1.0K (1608)
R5	1-218-847-91	s	RES, CHIP 1.0K (1608)
R6	1-218-847-91	s	RES, CHIP 1.0K (1608)
RV1	1-223-686-11	s	RES, VAR, CARBON 5K/5K
S1	1-570-995-11	s	SWITCH, KEY BOARD
S2	1-762-531-21	s	SWITCH, TOGGLE
S3	1-762-124-21	s	SWITCH, TOGGLE

SW-1426 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
CN1	1-580-055-21	o	PIN, CONNECTOR (SMD) 2P
S1	1-762-002-21	s	SWITCH, TOGGLE

SY-355 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1538-888-A	s	MOUNTED CIRCUIT BOARD, SY-355
C2	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C6	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C7	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C8	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C9	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C10	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C11	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C12	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C13	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C14	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C15	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C16	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C17	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C18	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C19	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C20	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C100	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C101	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C202	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C203	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C204	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C205	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C206	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C207	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C208	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C209	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C210	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C211	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C212	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C213	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C214	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C215	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C216	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C217	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C218	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C219	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C220	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C221	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C222	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C223	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C224	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C225	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C226	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C227	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C228	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C229	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C230	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C231	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C232	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C233	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C234	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C300	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C301	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C303	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C304	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C305	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(SY-355 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C306	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C307	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C308	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C309	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C311	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C312	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C313	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C314	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C315	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C316	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C317	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C400	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C401	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C402	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C403	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C404	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C405	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C406	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C407	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C408	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C409	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C410	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C411	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C412	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C413	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C414	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C415	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C416	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C417	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C418	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C419	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C420	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C421	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C422	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C423	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C424	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C425	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C426	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C427	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C428	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C429	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C430	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C431	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C432	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C433	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C434	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C435	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C436	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C437	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C438	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C439	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C440	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C441	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C442	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C443	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C444	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C445	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C446	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C447	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(SY-355 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C448	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C449	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C450	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C451	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C452	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C453	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C454	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C455	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C456	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C457	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C504	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C505	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C506	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C507	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C508	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C509	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C510	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C511	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C512	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C513	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C514	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C515	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C516	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C517	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C518	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C519	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C520	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C521	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C522	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C524	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C525	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C526	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C527	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C528	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C529	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C530	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C531	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C532	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C533	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C534	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C535	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C536	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C600	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C601	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C602	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C603	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C604	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C605	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C606	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C607	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C608	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C610	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C612	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C613	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C614	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C615	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C616	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C617	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C618	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(SY-355 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C619	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C621	1-164-882-81	s	CAP,CHIP CERAMIC 220PF CH 1005
C622	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C624	1-164-882-81	s	CAP,CHIP CERAMIC 220PF CH 1005
C625	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C700	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C701	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C800	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C801	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C802	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C803	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C804	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C805	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C806	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C807	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C808	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C809	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C810	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C811	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C812	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C813	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C814	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C815	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C816	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C817	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C818	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C819	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C820	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C821	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C822	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C823	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C824	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C825	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C826	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C827	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C828	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C829	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C830	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C831	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C832	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C833	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C834	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C835	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C836	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C837	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C838	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C839	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C840	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C841	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C842	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C843	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C844	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C845	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C846	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C847	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C848	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C849	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C850	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C851	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(SY-355 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C852	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C853	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C854	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C900	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C901	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C902	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C903	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C904	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C905	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C906	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C907	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C908	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C909	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C910	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C911	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C912	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C913	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1000	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1001	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1002	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1003	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1004	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1005	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1006	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1007	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1008	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1009	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1010	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1011	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1012	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1013	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1100	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C1101	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1102	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1103	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1104	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1105	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1106	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1107	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1108	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1109	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1110	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1111	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1112	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1113	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1114	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C1115	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1116	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1200	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1201	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1202	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C1203	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1204	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C1205	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1206	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1207	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1208	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1209	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C1210	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)

(SY-355 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1211	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1212	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C1213	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1214	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1215	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1300	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C1301	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1302	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1303	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1304	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1305	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1306	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1307	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1308	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1309	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1310	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1311	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1312	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1313	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1314	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1315	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1316	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1317	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1318	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1319	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1320	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1321	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1322	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1323	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1324	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1325	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C1326	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1327	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1328	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1329	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1330	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1331	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1332	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1333	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1334	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1335	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1336	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1337	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1338	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1339	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1340	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1341	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1342	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1343	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1344	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1345	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1346	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1347	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1348	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1349	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1350	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1351	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1352	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C1353	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(SY-355 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1354	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1355	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C1356	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1357	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1358	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1359	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1360	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1361	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1362	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1363	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1364	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1365	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1366	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1367	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1368	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C1369	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1370	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1371	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1372	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C1373	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1374	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1375	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1376	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1377	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1378	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1379	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1380	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1381	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1382	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1383	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1404	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1405	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1406	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1407	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1408	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1409	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1410	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1411	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1412	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1413	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1414	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1415	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1416	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1417	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1420	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C1421	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1422	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1423	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1424	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1425	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1500	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1501	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1502	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1503	1-112-300-91	s	CAP, CERAMIC 4.7MF B (2012)
C1504	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1505	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1506	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1507	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1508	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(SY-355 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1509	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1510	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1511	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1512	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1513	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1514	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1515	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C1516	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C1517	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C1518	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1519	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C1520	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1521	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C1522	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C1523	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C1524	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1526	1-100-880-91	s	CAP, CERAMIC 100MF C (3225)
C1527	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1530	1-100-880-91	s	CAP, CERAMIC 100MF C (3225)
CN200	1-764-099-21	s	PIN, CONNECTOR (PC BOARD) 14P
CN300	1-580-057-21	s	PIN, CONNECTOR (SMD) 4P
CN301	1-794-142-31	s	CONNECTOR, FFC/FPC(ZIF) AN 36P
CN500	1-770-627-21	s	PIN, CONNECTOR 10P
CN501	1-770-453-21	o	CONNECTOR, BOARD TO BOARD 70P
CN502	1-779-522-31	s	CONNECTOR, FFC/FPC(ZIF) AN 40P
CN600	1-691-551-21	o	PIN, CONNECTOR (SMD) 8P
CN1200	1-764-099-21	s	PIN, CONNECTOR (PC BOARD) 14P
CN1300	1-794-142-31	s	CONNECTOR, FFC/FPC(ZIF) AN 36P
CN1301	1-580-057-21	s	PIN, CONNECTOR (SMD) 4P
CN1400	1-770-627-21	s	PIN, CONNECTOR 10P
CN1401	1-770-453-21	o	CONNECTOR, BOARD TO BOARD 70P
CN1500	1-569-775-21	o	PIN, CONNECTOR (SMD) 5P
D1	8-719-074-31	s	DIODE CL-196YG-CD-T
D300	8-719-074-31	s	DIODE CL-196YG-CD-T
D301	8-719-074-31	s	DIODE CL-196YG-CD-T
D302	8-719-074-31	s	DIODE CL-196YG-CD-T
D303	8-719-074-31	s	DIODE CL-196YG-CD-T
D500	8-719-074-31	s	DIODE CL-196YG-CD-T
D501	8-719-074-31	s	DIODE CL-196YG-CD-T
D600	8-719-077-09	s	DIODE CL-196HR-CD-T
D601	8-719-077-09	s	DIODE CL-196HR-CD-T
D602	8-719-077-09	s	DIODE CL-196HR-CD-T
D603	8-719-074-31	s	DIODE CL-196YG-CD-T
D604	8-719-056-48	s	DIODE 1SS388(TPL3)
D605	6-500-750-01	s	DIODE NSAD500H-T1-AT
D1300	8-719-074-31	s	DIODE CL-196YG-CD-T
D1301	8-719-074-31	s	DIODE CL-196YG-CD-T
D1302	8-719-074-31	s	DIODE CL-196YG-CD-T
D1303	8-719-074-31	s	DIODE CL-196YG-CD-T
D1304	8-719-074-31	s	DIODE CL-196YG-CD-T
D1305	8-719-074-31	s	DIODE CL-196YG-CD-T
D1500	6-500-701-01	s	DIODE PGB1010603NR
D1501	6-500-701-01	s	DIODE PGB1010603NR
D1502	6-500-701-01	s	DIODE PGB1010603NR
E1	1-535-877-22	s	CHIP, CHECKER
E2	1-535-877-22	s	CHIP, CHECKER
E3	1-535-877-22	s	CHIP, CHECKER
E4	1-535-877-22	s	CHIP, CHECKER

(SY-355 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
E5	1-535-877-22	s	CHIP, CHECKER
E6	1-535-877-22	s	CHIP, CHECKER
FB1	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB10	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB11	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB200	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB201	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB202	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB300	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB301	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB302	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB400	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB401	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB402	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB500	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB501	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB800	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB801	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB802	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1100	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1101	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1200	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB1201	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB1202	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB1203	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB1204	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB1300	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1301	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1302	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1500	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB1501	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB1502	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB1503	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
IC1	6-706-220-01	s	IC LTC3411EMS#TR
IC2	6-706-220-01	s	IC LTC3411EMS#TR
IC3	6-706-220-01	s	IC LTC3411EMS#TR
IC8	6-706-484-01	s	IC TC7SH04FU(T5RSOYJF)
IC10	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC11	6-703-976-01	s	IC R1114Q181D-TR-FA
IC100	8-759-592-50	s	IC TC7SZ126FU(TE85R)
IC101	8-759-592-50	s	IC TC7SZ126FU(TE85R)
IC201	6-712-755-01	s	IC MT48LC32M16A2P-75IT
IC202	6-712-755-01	s	IC MT48LC32M16A2P-75IT
IC203	6-712-755-01	s	IC MT48LC32M16A2P-75IT
IC204	6-712-755-01	s	IC MT48LC32M16A2P-75IT
IC300	8-759-658-90	s	IC 24LC128T-I/SNG
IC301	8-759-598-44	s	IC TC7WH08FK(TE85R)
IC302	8-759-598-44	s	IC TC7WH08FK(TE85R)
IC303	8-759-592-50	s	IC TC7SZ126FU(TE85R)
IC304	8-759-598-44	s	IC TC7WH08FK(TE85R)
IC305	6-708-277-01	s	IC CDCVF25081PWR
IC306	6-708-277-01	s	IC CDCVF25081PWR
IC308	8-759-598-44	s	IC TC7WH08FK(TE85R)
IC309	6-702-879-01	s	IC R3112N281A-TR-FA
IC311	8-759-655-22	s	IC TC7WH34FK(TE85R)
IC400	6-706-220-01	s	IC LTC3411EMS#TR
IC401	6-703-976-01	s	IC R1114Q181D-TR-FA

(SY-355 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC501	8-759-691-76	s	IC SN74LVCHR16245AGR
IC502	8-759-691-76	s	IC SN74LVCHR16245AGR
IC503	8-759-691-76	s	IC SN74LVCHR16245AGR
IC504	8-759-691-76	s	IC SN74LVCHR16245AGR
IC507	6-711-402-01	s	IC MB85R256HPFTN
IC508	8-759-691-76	s	IC SN74LVCHR16245AGR
IC509	6-706-489-01	s	IC TC7SH32FU(T5RSOYJF)
IC510	6-706-484-01	s	IC TC7SH04FU(T5RSOYJF)
IC601	6-703-567-01	o	IC TSB41AB2 PAP
IC602	8-759-698-08	s	IC SN74CBTLV1G125DCKR
IC700	8-759-695-88	s	IC SN74CBTLV16211GR
IC701	8-759-695-88	s	IC SN74CBTLV16211GR
IC851	8-759-651-59	s	IC SN74CBTLV3245APWR
IC852	8-759-651-59	s	IC SN74CBTLV3245APWR
IC853	6-706-484-01	s	IC TC7SH04FU(T5RSOYJF)
IC854	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC855	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC1200	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC1201	6-702-879-01	s	IC R3112N281A-TR-FA
IC1202	6-706-484-01	s	IC TC7SH04FU(T5RSOYJF)
IC1203	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC1204	6-703-875-01	s	IC CDCVF2505PWR
IC1205	6-703-875-01	s	IC CDCVF2505PWR
IC1206	8-759-592-50	s	IC TC7SZ126FU(TE85R)
IC1207	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC1208	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC1209	6-706-484-01	s	IC TC7SH04FU(T5RSOYJF)
IC1210	6-706-484-01	s	IC TC7SH04FU(T5RSOYJF)
IC1211	6-702-879-01	s	IC R3112N281A-TR-FA
IC1301	6-712-755-01	s	IC MT48LC32M16A2P-75IT
IC1302	6-712-755-01	s	IC MT48LC32M16A2P-75IT
IC1303	6-712-755-01	s	IC MT48LC32M16A2P-75IT
IC1304	6-712-755-01	s	IC MT48LC32M16A2P-75IT
IC1305	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC1401	8-759-691-76	s	IC SN74LVCHR16245AGR
IC1402	8-759-691-76	s	IC SN74LVCHR16245AGR
IC1403	8-759-691-76	s	IC SN74LVCHR16245AGR
IC1404	8-759-691-76	s	IC SN74LVCHR16245AGR
IC1501	6-702-024-01	s	IC MIC2026-2YM TR
L1	1-400-870-21	s	COIL, CHOKE 2.2UH
L2	1-400-870-21	s	COIL, CHOKE 2.2UH
L3	1-400-870-21	s	COIL, CHOKE 2.2UH
L400	1-400-870-21	s	COIL, CHOKE 2.2UH
L600	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L601	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
Q1	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q2	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q3	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q4	6-550-832-01	s	TRANSISTOR SI2301BDS-T1
Q300	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q400	6-550-832-01	s	TRANSISTOR SI2301BDS-T1
Q401	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q500	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q851	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q852	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q853	6-551-261-01	s	TRANSISTOR SI4804BDY-T1
Q854	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q855	8-729-928-82	s	TRANSISTOR DTC144EE-TL

(SY-355 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
Q856	6-550-832-01	s	TRANSISTOR SI2301BDS-T1
Q857	6-550-832-01	s	TRANSISTOR SI2301BDS-T1
Q1200	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q1201	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q1400	8-729-928-28	s	TRANSISTOR DTA144EE-TL
R3	1-208-911-81	s	RES, CHIP 10K (1005)
R6	1-208-947-81	s	RES, CHIP 330K (1005)
R7	1-208-911-81	s	RES, CHIP 10K (1005)
R8	1-208-935-81	s	RES, CHIP 100K (1005)
R9	1-208-911-81	s	RES, CHIP 10K (1005)
R10	1-208-947-81	s	RES, CHIP 330K (1005)
R11	1-208-935-81	s	RES, CHIP 100K (1005)
R12	1-208-935-81	s	RES, CHIP 100K (1005)
R13	1-208-935-81	s	RES, CHIP 100K (1005)
R14	1-208-935-81	s	RES, CHIP 100K (1005)
R15	1-208-911-81	s	RES, CHIP 10K (1005)
R16	1-208-935-81	s	RES, CHIP 100K (1005)
R19	1-208-911-81	s	RES, CHIP 10K (1005)
R20	1-208-947-81	s	RES, CHIP 330K (1005)
R21	1-208-935-81	s	RES, CHIP 100K (1005)
R22	1-208-927-81	s	RES, CHIP 47K (1005)
R23	1-208-911-81	s	RES, CHIP 10K (1005)
R24	1-208-887-81	s	RES, CHIP 1.0K (1005)
R100	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R101	1-220-878-81	s	RES, CHIP 22 (1005)
R200	1-208-887-81	s	RES, CHIP 1.0K (1005)
R201	1-208-863-81	s	RES, CHIP 100 (1005)
R202	1-208-863-81	s	RES, CHIP 100 (1005)
R204	1-208-911-81	s	RES, CHIP 10K (1005)
R206	1-208-911-81	s	RES, CHIP 10K (1005)
R207	1-208-911-81	s	RES, CHIP 10K (1005)
R209	1-220-878-81	s	RES, CHIP 22 (1005)
R210	1-220-878-81	s	RES, CHIP 22 (1005)
R211	1-220-878-81	s	RES, CHIP 22 (1005)
R212	1-208-911-81	s	RES, CHIP 10K (1005)
R213	1-208-911-81	s	RES, CHIP 10K (1005)
R214	1-208-911-81	s	RES, CHIP 10K (1005)
R215	1-208-911-81	s	RES, CHIP 10K (1005)
R216	1-208-911-81	s	RES, CHIP 10K (1005)
R217	1-208-911-81	s	RES, CHIP 10K (1005)
R218	1-208-911-81	s	RES, CHIP 10K (1005)
R219	1-208-911-81	s	RES, CHIP 10K (1005)
R220	1-208-911-81	s	RES, CHIP 10K (1005)
R221	1-208-911-81	s	RES, CHIP 10K (1005)
R222	1-208-911-81	s	RES, CHIP 10K (1005)
R223	1-208-911-81	s	RES, CHIP 10K (1005)
R224	1-208-911-81	s	RES, CHIP 10K (1005)
R225	1-220-870-81	s	RES, CHIP 10 (1005)
R226	1-220-870-81	s	RES, CHIP 10 (1005)
R227	1-208-855-81	s	RES, CHIP 47 (1005)
R228	1-220-878-81	s	RES, CHIP 22 (1005)
R229	1-208-911-81	s	RES, CHIP 10K (1005)
R230	1-208-911-81	s	RES, CHIP 10K (1005)
R231	1-208-911-81	s	RES, CHIP 10K (1005)
R232	1-208-911-81	s	RES, CHIP 10K (1005)
R233	1-208-911-81	s	RES, CHIP 10K (1005)
R234	1-208-911-81	s	RES, CHIP 10K (1005)
R235	1-208-911-81	s	RES, CHIP 10K (1005)
R236	1-208-911-81	s	RES, CHIP 10K (1005)

(SY-355 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R237	1-208-911-81	s	RES, CHIP 10K (1005)
R238	1-208-911-81	s	RES, CHIP 10K (1005)
R239	1-208-911-81	s	RES, CHIP 10K (1005)
R240	1-208-911-81	s	RES, CHIP 10K (1005)
R241	1-208-911-81	s	RES, CHIP 10K (1005)
R242	1-208-911-81	s	RES, CHIP 10K (1005)
R244	1-220-870-81	s	RES, CHIP 10 (1005)
R245	1-220-870-81	s	RES, CHIP 10 (1005)
R246	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R247	1-208-903-81	s	RES, CHIP 4.7K (1005)
R248	1-208-855-81	s	RES, CHIP 47 (1005)
R249	1-220-878-81	s	RES, CHIP 22 (1005)
R250	1-220-878-81	s	RES, CHIP 22 (1005)
R251	1-208-911-81	s	RES, CHIP 10K (1005)
R252	1-220-878-81	s	RES, CHIP 22 (1005)
R253	1-208-911-81	s	RES, CHIP 10K (1005)
R254	1-208-911-81	s	RES, CHIP 10K (1005)
R255	1-208-911-81	s	RES, CHIP 10K (1005)
R256	1-208-911-81	s	RES, CHIP 10K (1005)
R257	1-208-911-81	s	RES, CHIP 10K (1005)
R258	1-208-911-81	s	RES, CHIP 10K (1005)
R259	1-208-911-81	s	RES, CHIP 10K (1005)
R260	1-208-911-81	s	RES, CHIP 10K (1005)
R261	1-208-911-81	s	RES, CHIP 10K (1005)
R262	1-208-911-81	s	RES, CHIP 10K (1005)
R263	1-208-911-81	s	RES, CHIP 10K (1005)
R264	1-220-878-81	s	RES, CHIP 22 (1005)
R265	1-220-878-81	s	RES, CHIP 22 (1005)
R266	1-220-878-81	s	RES, CHIP 22 (1005)
R267	1-220-878-81	s	RES, CHIP 22 (1005)
R268	1-220-878-81	s	RES, CHIP 22 (1005)
R269	1-220-878-81	s	RES, CHIP 22 (1005)
R270	1-220-878-81	s	RES, CHIP 22 (1005)
R271	1-220-878-81	s	RES, CHIP 22 (1005)
R272	1-220-878-81	s	RES, CHIP 22 (1005)
R273	1-220-878-81	s	RES, CHIP 22 (1005)
R274	1-220-878-81	s	RES, CHIP 22 (1005)
R275	1-220-878-81	s	RES, CHIP 22 (1005)
R276	1-220-878-81	s	RES, CHIP 22 (1005)
R277	1-220-878-81	s	RES, CHIP 22 (1005)
R278	1-220-878-81	s	RES, CHIP 22 (1005)
R279	1-220-878-81	s	RES, CHIP 22 (1005)
R280	1-220-878-81	s	RES, CHIP 22 (1005)
R281	1-220-878-81	s	RES, CHIP 22 (1005)
R282	1-220-878-81	s	RES, CHIP 22 (1005)
R283	1-220-878-81	s	RES, CHIP 22 (1005)
R284	1-220-878-81	s	RES, CHIP 22 (1005)
R285	1-220-878-81	s	RES, CHIP 22 (1005)
R286	1-220-878-81	s	RES, CHIP 22 (1005)
R287	1-208-887-81	s	RES, CHIP 1.0K (1005)
R288	1-220-882-81	s	RES, CHIP 33 (1005)
R289	1-208-887-81	s	RES, CHIP 1.0K (1005)
R290	1-220-882-81	s	RES, CHIP 33 (1005)
R291	1-208-887-81	s	RES, CHIP 1.0K (1005)
R292	1-220-882-81	s	RES, CHIP 33 (1005)
R293	1-208-887-81	s	RES, CHIP 1.0K (1005)
R294	1-220-882-81	s	RES, CHIP 33 (1005)
R295	1-220-878-81	s	RES, CHIP 22 (1005)
R296	1-220-878-81	s	RES, CHIP 22 (1005)

(SY-355 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R300	1-208-911-81	s	RES, CHIP 10K (1005)
R301	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R306	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R307	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R308	1-220-878-81	s	RES, CHIP 22 (1005)
R309	1-220-878-81	s	RES, CHIP 22 (1005)
R310	1-220-878-81	s	RES, CHIP 22 (1005)
R311	1-220-878-81	s	RES, CHIP 22 (1005)
R312	1-220-878-81	s	RES, CHIP 22 (1005)
R313	1-220-878-81	s	RES, CHIP 22 (1005)
R314	1-220-878-81	s	RES, CHIP 22 (1005)
R315	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R316	1-220-878-81	s	RES, CHIP 22 (1005)
R317	1-220-878-81	s	RES, CHIP 22 (1005)
R318	1-208-911-81	s	RES, CHIP 10K (1005)
R319	1-208-895-81	s	RES, CHIP 2.2K (1005)
R320	1-208-895-81	s	RES, CHIP 2.2K (1005)
R324	1-208-911-81	s	RES, CHIP 10K (1005)
R325	1-208-911-81	s	RES, CHIP 10K (1005)
R326	1-208-911-81	s	RES, CHIP 10K (1005)
R328	1-220-878-81	s	RES, CHIP 22 (1005)
R329	1-220-878-81	s	RES, CHIP 22 (1005)
R330	1-220-878-81	s	RES, CHIP 22 (1005)
R331	1-220-878-81	s	RES, CHIP 22 (1005)
R332	1-220-878-81	s	RES, CHIP 22 (1005)
R338	1-208-911-81	s	RES, CHIP 10K (1005)
R339	1-208-911-81	s	RES, CHIP 10K (1005)
R340	1-220-878-81	s	RES, CHIP 22 (1005)
R341	1-220-878-81	s	RES, CHIP 22 (1005)
R343	1-220-878-81	s	RES, CHIP 22 (1005)
R346	1-208-935-81	s	RES, CHIP 100K (1005)
R347	1-220-870-81	s	RES, CHIP 10 (1005)
R348	1-208-935-81	s	RES, CHIP 100K (1005)
R349	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R350	1-220-870-81	s	RES, CHIP 10 (1005)
R351	1-220-870-81	s	RES, CHIP 10 (1005)
R352	1-220-870-81	s	RES, CHIP 10 (1005)
R353	1-220-870-81	s	RES, CHIP 10 (1005)
R354	1-220-870-81	s	RES, CHIP 10 (1005)
R355	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R356	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R357	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R358	1-220-870-81	s	RES, CHIP 10 (1005)
R359	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R360	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R361	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R362	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R363	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R364	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R402	1-208-911-81	s	RES, CHIP 10K (1005)
R403	1-208-911-81	s	RES, CHIP 10K (1005)
R404	1-208-935-81	s	RES, CHIP 100K (1005)
R405	1-208-911-81	s	RES, CHIP 10K (1005)
R406	1-208-947-81	s	RES, CHIP 330K (1005)
R407	1-208-935-81	s	RES, CHIP 100K (1005)
R408	1-208-911-81	s	RES, CHIP 10K (1005)
R409	1-208-935-81	s	RES, CHIP 100K (1005)
R500	1-208-903-81	s	RES, CHIP 4.7K (1005)
R501	1-208-911-81	s	RES, CHIP 10K (1005)

(SY-355 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R502	1-208-911-81	s	RES, CHIP 10K (1005)
R503	1-208-911-81	s	RES, CHIP 10K (1005)
R504	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R505	1-208-887-81	s	RES, CHIP 1.0K (1005)
R506	1-208-887-81	s	RES, CHIP 1.0K (1005)
R507	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R508	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R509	1-220-878-81	s	RES, CHIP 22 (1005)
R510	1-220-878-81	s	RES, CHIP 22 (1005)
R511	1-208-903-81	s	RES, CHIP 4.7K (1005)
R512	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R513	1-220-878-81	s	RES, CHIP 22 (1005)
R514	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R515	1-208-903-81	s	RES, CHIP 4.7K (1005)
R516	1-208-903-81	s	RES, CHIP 4.7K (1005)
R517	1-208-903-81	s	RES, CHIP 4.7K (1005)
R518	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R519	1-220-878-81	s	RES, CHIP 22 (1005)
R521	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R522	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R523	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R524	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R525	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R528	1-220-870-81	s	RES, CHIP 10 (1005)
R530	1-208-911-81	s	RES, CHIP 10K (1005)
R531	1-208-911-81	s	RES, CHIP 10K (1005)
R532	1-208-911-81	s	RES, CHIP 10K (1005)
R534	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R536	1-208-911-81	s	RES, CHIP 10K (1005)
R537	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R538	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R539	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R543	1-208-911-81	s	RES, CHIP 10K (1005)
R545	1-208-855-81	s	RES, CHIP 47 (1005)
R546	1-220-878-81	s	RES, CHIP 22 (1005)
R547	1-220-878-81	s	RES, CHIP 22 (1005)
R550	1-220-878-81	s	RES, CHIP 22 (1005)
R600	1-220-878-81	s	RES, CHIP 22 (1005)
R601	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R603	1-208-911-81	s	RES, CHIP 10K (1005)
R604	1-208-911-81	s	RES, CHIP 10K (1005)
R606	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R611	1-208-887-81	s	RES, CHIP 1.0K (1005)
R613	1-208-911-81	s	RES, CHIP 10K (1005)
R614	1-208-911-81	s	RES, CHIP 10K (1005)
R617	1-208-857-81	s	RES, CHIP 56 (1005)
R618	1-208-857-81	s	RES, CHIP 56 (1005)
R619	1-208-911-81	s	RES, CHIP 10K (1005)
R620	1-208-857-81	s	RES, CHIP 56 (1005)
R621	1-208-911-81	s	RES, CHIP 10K (1005)
R622	1-208-857-81	s	RES, CHIP 56 (1005)
R623	1-208-892-81	s	RES, CHIP 1.6K (1005)
R624	1-208-903-81	s	RES, CHIP 4.7K (1005)
R626	1-208-857-81	s	RES, CHIP 56 (1005)
R627	1-208-857-81	s	RES, CHIP 56 (1005)
R628	1-208-857-81	s	RES, CHIP 56 (1005)
R629	1-208-911-81	s	RES, CHIP 10K (1005)
R630	1-208-857-81	s	RES, CHIP 56 (1005)
R631	1-208-911-81	s	RES, CHIP 10K (1005)

(SY-355 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R634	1-208-947-81	s	RES, CHIP 330K (1005)
R702	1-208-863-81	s	RES, CHIP 100 (1005)
R803	1-208-875-81	s	RES, CHIP 330 (1005)
R804	1-208-857-81	s	RES, CHIP 56 (1005)
R806	1-208-857-81	s	RES, CHIP 56 (1005)
R807	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R813	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R814	1-208-911-81	s	RES, CHIP 10K (1005)
R816	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R817	1-208-903-81	s	RES, CHIP 4.7K (1005)
R851	1-208-935-81	s	RES, CHIP 100K (1005)
R852	1-208-935-81	s	RES, CHIP 100K (1005)
R853	1-208-935-81	s	RES, CHIP 100K (1005)
R854	1-208-935-81	s	RES, CHIP 100K (1005)
R855	1-208-935-81	s	RES, CHIP 100K (1005)
R856	1-208-935-81	s	RES, CHIP 100K (1005)
R857	1-208-911-81	s	RES, CHIP 10K (1005)
R900	1-220-878-81	s	RES, CHIP 22 (1005)
R901	1-220-878-81	s	RES, CHIP 22 (1005)
R902	1-220-878-81	s	RES, CHIP 22 (1005)
R905	1-208-863-81	s	RES, CHIP 100 (1005)
R906	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1000	1-208-863-81	s	RES, CHIP 100 (1005)
R1100	1-208-875-81	s	RES, CHIP 330 (1005)
R1101	1-208-911-81	s	RES, CHIP 10K (1005)
R1102	1-208-911-81	s	RES, CHIP 10K (1005)
R1103	1-208-911-81	s	RES, CHIP 10K (1005)
R1104	1-208-857-81	s	RES, CHIP 56 (1005)
R1106	1-208-857-81	s	RES, CHIP 56 (1005)
R1107	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1117	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1202	1-220-878-81	s	RES, CHIP 22 (1005)
R1203	1-220-878-81	s	RES, CHIP 22 (1005)
R1204	1-220-878-81	s	RES, CHIP 22 (1005)
R1205	1-208-911-81	s	RES, CHIP 10K (1005)
R1207	1-220-870-81	s	RES, CHIP 10 (1005)
R1208	1-220-870-81	s	RES, CHIP 10 (1005)
R1209	1-220-878-81	s	RES, CHIP 22 (1005)
R1210	1-220-878-81	s	RES, CHIP 22 (1005)
R1212	1-220-870-81	s	RES, CHIP 10 (1005)
R1213	1-220-870-81	s	RES, CHIP 10 (1005)
R1214	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1215	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1216	1-220-878-81	s	RES, CHIP 22 (1005)
R1217	1-220-878-81	s	RES, CHIP 22 (1005)
R1218	1-220-878-81	s	RES, CHIP 22 (1005)
R1219	1-208-911-81	s	RES, CHIP 10K (1005)
R1220	1-208-911-81	s	RES, CHIP 10K (1005)
R1221	1-208-911-81	s	RES, CHIP 10K (1005)
R1222	1-208-911-81	s	RES, CHIP 10K (1005)
R1223	1-208-911-81	s	RES, CHIP 10K (1005)
R1224	1-208-911-81	s	RES, CHIP 10K (1005)
R1225	1-208-911-81	s	RES, CHIP 10K (1005)
R1226	1-208-911-81	s	RES, CHIP 10K (1005)
R1227	1-208-911-81	s	RES, CHIP 10K (1005)
R1228	1-208-911-81	s	RES, CHIP 10K (1005)
R1229	1-208-911-81	s	RES, CHIP 10K (1005)
R1230	1-208-911-81	s	RES, CHIP 10K (1005)
R1231	1-208-855-81	s	RES, CHIP 47 (1005)

(SY-355 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1232	1-208-911-81	s	RES, CHIP 10K (1005)
R1233	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1234	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1235	1-220-870-81	s	RES, CHIP 10 (1005)
R1237	1-220-878-81	s	RES, CHIP 22 (1005)
R1238	1-220-878-81	s	RES, CHIP 22 (1005)
R1239	1-220-878-81	s	RES, CHIP 22 (1005)
R1241	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1242	1-220-878-81	s	RES, CHIP 22 (1005)
R1243	1-220-878-81	s	RES, CHIP 22 (1005)
R1245	1-208-911-81	s	RES, CHIP 10K (1005)
R1246	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1248	1-220-878-81	s	RES, CHIP 22 (1005)
R1249	1-208-911-81	s	RES, CHIP 10K (1005)
R1250	1-220-878-81	s	RES, CHIP 22 (1005)
R1251	1-208-911-81	s	RES, CHIP 10K (1005)
R1252	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1253	1-208-911-81	s	RES, CHIP 10K (1005)
R1254	1-208-911-81	s	RES, CHIP 10K (1005)
R1255	1-208-895-81	s	RES, CHIP 2.2K (1005)
R1300	1-208-911-81	s	RES, CHIP 10K (1005)
R1301	1-220-878-81	s	RES, CHIP 22 (1005)
R1303	1-208-911-81	s	RES, CHIP 10K (1005)
R1304	1-208-911-81	s	RES, CHIP 10K (1005)
R1305	1-208-911-81	s	RES, CHIP 10K (1005)
R1306	1-208-911-81	s	RES, CHIP 10K (1005)
R1307	1-208-911-81	s	RES, CHIP 10K (1005)
R1308	1-208-911-81	s	RES, CHIP 10K (1005)
R1309	1-208-879-81	s	RES, CHIP 470 (1005)
R1310	1-208-879-81	s	RES, CHIP 470 (1005)
R1311	1-208-879-81	s	RES, CHIP 470 (1005)
R1312	1-220-878-81	s	RES, CHIP 22 (1005)
R1313	1-208-879-81	s	RES, CHIP 470 (1005)
R1314	1-208-879-81	s	RES, CHIP 470 (1005)
R1315	1-208-879-81	s	RES, CHIP 470 (1005)
R1316	1-220-878-81	s	RES, CHIP 22 (1005)
R1317	1-220-878-81	s	RES, CHIP 22 (1005)
R1318	1-220-878-81	s	RES, CHIP 22 (1005)
R1319	1-220-878-81	s	RES, CHIP 22 (1005)
R1320	1-220-878-81	s	RES, CHIP 22 (1005)
R1321	1-220-878-81	s	RES, CHIP 22 (1005)
R1322	1-208-911-81	s	RES, CHIP 10K (1005)
R1323	1-208-911-81	s	RES, CHIP 10K (1005)
R1324	1-208-911-81	s	RES, CHIP 10K (1005)
R1325	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1326	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1327	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1328	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1329	1-220-878-81	s	RES, CHIP 22 (1005)
R1330	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1331	1-220-878-81	s	RES, CHIP 22 (1005)
R1332	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1333	1-220-878-81	s	RES, CHIP 22 (1005)
R1334	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1335	1-220-878-81	s	RES, CHIP 22 (1005)
R1336	1-208-911-81	s	RES, CHIP 10K (1005)
R1337	1-220-878-81	s	RES, CHIP 22 (1005)
R1338	1-220-878-81	s	RES, CHIP 22 (1005)
R1339	1-220-878-81	s	RES, CHIP 22 (1005)

(SY-355 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1340	1-220-878-81	s	RES, CHIP 22 (1005)
R1400	1-208-911-81	s	RES, CHIP 10K (1005)
R1401	1-208-911-81	s	RES, CHIP 10K (1005)
R1402	1-208-911-81	s	RES, CHIP 10K (1005)
R1403	1-220-878-81	s	RES, CHIP 22 (1005)
R1410	1-220-870-81	s	RES, CHIP 10 (1005)
R1411	1-208-911-81	s	RES, CHIP 10K (1005)
R1413	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1414	1-208-911-81	s	RES, CHIP 10K (1005)
R1416	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1417	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1418	1-208-911-81	s	RES, CHIP 10K (1005)
R1419	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1420	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1432	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1440	1-208-911-81	s	RES, CHIP 10K (1005)
R1441	1-220-878-81	s	RES, CHIP 22 (1005)
R1500	1-220-878-81	s	RES, CHIP 22 (1005)
R1501	1-220-878-81	s	RES, CHIP 22 (1005)
R1502	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1503	1-208-863-81	s	RES, CHIP 100 (1005)
R1504	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1507	1-208-911-81	s	RES, CHIP 10K (1005)
R1508	1-208-911-81	s	RES, CHIP 10K (1005)
R1509	1-208-892-81	s	RES, CHIP 1.6K (1005)
R1510	1-208-863-81	s	RES, CHIP 100 (1005)
R1511	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1512	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1513	1-208-911-81	s	RES, CHIP 10K (1005)
R1519	1-208-911-81	s	RES, CHIP 10K (1005)
R1520	1-208-911-81	s	RES, CHIP 10K (1005)
R1522	1-208-911-81	s	RES, CHIP 10K (1005)
R1523	1-208-911-81	s	RES, CHIP 10K (1005)
R1525	1-208-911-81	s	RES, CHIP 10K (1005)
RB200	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB201	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB202	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB203	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB204	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB205	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB206	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB207	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB208	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB209	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB210	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB211	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB212	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB213	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB214	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB215	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB216	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB217	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB218	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB219	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB220	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB221	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB222	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB223	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB224	1-234-371-21	s	RES, NETWORK 47 (1005X4)

(SY-355 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB225	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB226	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB227	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB228	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB229	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB300	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB301	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB302	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB303	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB305	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB306	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB307	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB308	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB309	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB310	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB311	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB312	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB500	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB501	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB502	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB533	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB534	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB535	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB536	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB537	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB538	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB539	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB544	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB545	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB546	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB547	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB548	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB549	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB550	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB600	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB1200	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1201	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1202	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1203	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1204	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1205	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1206	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1207	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1208	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1209	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1210	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1211	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1212	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1213	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1214	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1215	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1216	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1217	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1218	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1219	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1220	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1221	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1222	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1223	1-234-370-21	s	RES, NETWORK 22 (1005X4)

(SY-355 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB1224	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1225	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1226	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1227	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1228	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1229	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1230	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1231	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1232	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1233	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1235	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1236	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1237	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1238	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1239	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1240	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1241	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1304	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1308	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1309	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1310	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1311	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1312	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1313	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1314	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1315	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1316	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1317	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1318	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1400	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1402	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1422	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1424	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1425	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1426	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1427	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1428	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1429	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1431	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1432	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1433	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1434	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1435	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1436	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1437	1-234-370-21	s	RES, NETWORK 22 (1005X4)
S200	1-771-721-21	s	SWITCH, TACTILE
S300	1-692-271-41	s	SWITCH, SLIDE
S301	1-771-721-21	s	SWITCH, TACTILE
S1200	1-771-721-21	s	SWITCH, TACTILE
S1201	1-771-721-21	s	SWITCH, TACTILE
S1301	1-692-271-41	s	SWITCH, SLIDE
TP1	1-535-877-22	s	CHIP, CHECKER
X300	1-813-824-11	s	OSCILLATOR, CRYSTAL
X600	1-813-049-21	s	VIBRATOR, CRYSTAL (24.576 MHz)
X1500	1-813-345-21	s	VIBRATOR, CRYSTAL (30 MHz)

TG-260 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1540-092-A	s	MOUNTED CIRCUIT BOARD, TG-260
C1	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C3	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4	1-112-300-91	s	CAP, CERAMIC 4.7MF B (2012)
C5	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C6	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C7	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C8	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C9	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C10	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C12	1-112-300-91	s	CAP, CERAMIC 4.7MF B (2012)
C13	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C14	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C15	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C16	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C17	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C18	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C20	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C22	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C23	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C24	1-100-165-21	s	CAP, ELECT 47MF (8X7)
C25	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C26	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C27	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C28	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C29	1-100-816-21	s	CAP, ELECT 33MF (5.6X6.5)
C32	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C33	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C34	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C35	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C36	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C37	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C38	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C39	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C40	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C41	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C42	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C43	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C44	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C45	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C46	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C47	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C48	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C49	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C50	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C51	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C52	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C53	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C54	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C55	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C56	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C57	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C58	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C59	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C61	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C62	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C63	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(TG-260 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C64	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C66	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C67	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C69	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C70	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C71	1-126-398-21	s	CAP, CHIP ELECT 4.7MF (4X5.7)
C72	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C73	1-126-398-21	s	CAP, CHIP ELECT 4.7MF (4X5.7)
C74	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C75	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C76	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C77	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C78	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C79	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C80	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C81	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C82	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C83	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C84	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C85	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C86	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C87	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C88	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C90	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C91	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C92	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C93	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C94	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C95	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C96	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C97	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C98	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C99	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C100	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C101	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C102	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C103	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C104	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C105	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C106	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C107	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C108	1-100-816-21	s	CAP, ELECT 33MF (5.6X6.5)
C109	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C110	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C114	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C115	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C116	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
CN2	1-817-194-21	s	PIN, CONNECTOR (SMD) 13P
CN3	1-818-579-91	s	CONNECTOR, BOARD TO BOARD(60P)
CN4	1-580-789-21	s	PIN, CONNECTOR (SMD) 6P
CN5	1-770-627-21	s	PIN, CONNECTOR 10P
D1	8-719-083-60	s	DI UDZSUSTE-174.7B
D3	6-502-122-01	s	DI MA3J1430GLS0
D4	6-502-122-01	s	DI MA3J1430GLS0
D5	6-502-121-01	s	DI MA3J142EGLS0
D6	6-502-121-01	s	DI MA3J142EGLS0
D7	6-502-121-01	s	DI MA3J142EGLS0
D8	8-719-083-60	s	DI UDZSUSTE-174.7B

(TG-260 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
D9	8-719-083-60	s	DI UDZSUSTE-174.7B
D10	6-502-146-01	o	DI MA2S7280G8S0
E1	1-535-877-22	s	CHIP, CHECKER
FB1	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB3	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB4	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB5	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB6	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB7	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
IC1	6-704-976-01	s	IC ADR381ARTZ-REEL7
IC2	8-759-327-01	s	IC NJM062V(TE2)
IC4	8-759-327-01	s	IC NJM062V(TE2)
IC5	6-711-375-01	s	IC LT1964ES5-BYP#TR
IC7	6-711-852-01	s	IC LTC1844ES5-BYP
IC9	6-709-765-01	s	IC EPCS4SI8N(15)
IC10	6-704-099-01	s	IC TC7WZ08FK(TE85R)
IC11	8-759-549-20	s	IC SN74LV541APWR
IC12	6-709-646-01	s	IC TLC2933AIPWR
IC13	6-704-099-01	s	IC TC7WZ08FK(TE85R)
IC14	8-759-327-01	s	IC NJM062V(TE2)
IC15	8-759-327-01	s	IC NJM062V(TE2)
IC17	8-759-672-76	s	IC AK9813BF-E2
IC18	8-759-327-01	s	IC NJM062V(TE2)
IC19	8-759-338-95	s	IC NJM2903V(TE2)
IC20	8-759-338-95	s	IC NJM2903V(TE2)
IC21	8-759-338-95	s	IC NJM2903V(TE2)
IC22	6-704-099-01	s	IC TC7WZ08FK(TE85R)
IC23	8-759-564-49	s	IC TC7W53FU(TE12R)
IC24	6-711-852-01	s	IC LTC1844ES5-BYP
IC25	6-710-110-01	s	IC CDCE906PWR
IC26	6-711-852-01	s	IC LTC1844ES5-BYP
IC27	8-759-592-42	s	IC TC7SZ00FU(TE85R)
IC28	6-711-852-01	s	IC LTC1844ES5-BYP
IC29	6-711-852-01	s	IC LTC1844ES5-BYP
IC30	6-706-478-01	s	IC TC7SET08FU(T5RSOJF)
IC31	8-759-675-54	s	IC TC7W53FK(TE85R)
L1	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
Q2	6-550-631-01	s	TRANSISTOR 2SA1797-T100-Q
Q3	6-550-631-01	s	TRANSISTOR 2SA1797-T100-Q
Q5	6-550-631-01	s	TRANSISTOR 2SA1797-T100-Q
Q7	6-550-631-01	s	TRANSISTOR 2SA1797-T100-Q
Q8	8-729-144-81	s	TRANSISTOR 2SC4176T1B33B34B35
Q9	8-729-144-81	s	TRANSISTOR 2SC4176T1B33B34B35
Q10	8-729-140-86	s	TRANSISTOR 2SA1610-T1Y34
Q11	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q14	8-729-144-81	s	TRANSISTOR 2SC4176T1B33B34B35
Q15	8-729-140-86	s	TRANSISTOR 2SA1610-T1Y34
Q16	8-729-107-04	s	TRANSISTOR 2SB1115-T1YL
Q17	8-729-809-73	s	TRANSISTOR 2SK536-TB
Q18	6-551-659-01	s	TRANSISTOR SI3443BDV-T1-E3
Q19	6-551-659-01	s	TRANSISTOR SI3443BDV-T1-E3
Q20	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q21	6-550-632-01	s	TRANSISTOR 2SC4672-T100-Q
R1	1-208-899-81	s	RES, CHIP 3.3K (1005)

(TG-260 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R2	1-208-911-81	s	RES, CHIP 10K (1005)
R3	1-208-911-81	s	RES, CHIP 10K (1005)
R4	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R5	1-220-878-81	s	RES, CHIP 22 (1005)
R6	1-208-863-81	s	RES, CHIP 100 (1005)
R7	1-208-863-81	s	RES, CHIP 100 (1005)
R8	1-208-863-81	s	RES, CHIP 100 (1005)
R9	1-220-878-81	s	RES, CHIP 22 (1005)
R10	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R11	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R12	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R13	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R14	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R15	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R16	1-208-919-81	s	RES, CHIP 22K (1005)
R17	1-208-903-81	s	RES, CHIP 4.7K (1005)
R18	1-208-919-81	s	RES, CHIP 22K (1005)
R19	1-208-863-81	s	RES, CHIP 100 (1005)
R20	1-208-915-81	s	RES, CHIP 15K (1005)
R21	1-208-911-81	s	RES, CHIP 10K (1005)
R22	1-208-883-81	s	RES, CHIP 680 (1005)
R24	1-208-863-81	s	RES, CHIP 100 (1005)
R25	1-208-863-81	s	RES, CHIP 100 (1005)
R27	1-220-878-81	s	RES, CHIP 22 (1005)
R28	1-208-879-81	s	RES, CHIP 470 (1005)
R29	1-208-899-81	s	RES, CHIP 3.3K (1005)
R30	1-208-927-81	s	RES, CHIP 47K (1005)
R31	1-208-911-81	s	RES, CHIP 10K (1005)
R32	1-208-863-81	s	RES, CHIP 100 (1005)
R33	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R35	1-208-915-81	s	RES, CHIP 15K (1005)
R36	1-208-911-81	s	RES, CHIP 10K (1005)
R37	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R38	1-208-927-81	s	RES, CHIP 47K (1005)
R39	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R44	1-208-903-81	s	RES, CHIP 4.7K (1005)
R45	1-208-919-81	s	RES, CHIP 22K (1005)
R47	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R48	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R49	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R50	1-208-855-81	s	RES, CHIP 47 (1005)
R51	1-208-855-81	s	RES, CHIP 47 (1005)
R52	1-220-870-81	s	RES, CHIP 10 (1005)
R53	1-208-855-81	s	RES, CHIP 47 (1005)
R54	1-208-863-81	s	RES, CHIP 100 (1005)
R55	1-208-855-81	s	RES, CHIP 47 (1005)
R56	1-208-855-81	s	RES, CHIP 47 (1005)
R57	1-208-863-81	s	RES, CHIP 100 (1005)
R58	1-208-863-81	s	RES, CHIP 100 (1005)
R59	1-208-863-81	s	RES, CHIP 100 (1005)
R60	1-208-855-81	s	RES, CHIP 47 (1005)
R61	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R62	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R63	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R64	1-208-911-81	s	RES, CHIP 10K (1005)
R65	1-208-875-81	s	RES, CHIP 330 (1005)
R66	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R67	1-208-879-81	s	RES, CHIP 470 (1005)
R68	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(TG-260 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R69	1-208-855-81	s	RES, CHIP 47 (1005)
R70	1-208-911-81	s	RES, CHIP 10K (1005)
R71	1-208-855-81	s	RES, CHIP 47 (1005)
R72	1-208-911-81	s	RES, CHIP 10K (1005)
R73	1-208-855-81	s	RES, CHIP 47 (1005)
R74	1-208-855-81	s	RES, CHIP 47 (1005)
R75	1-208-855-81	s	RES, CHIP 47 (1005)
R76	1-208-855-81	s	RES, CHIP 47 (1005)
R77	1-208-855-81	s	RES, CHIP 47 (1005)
R78	1-208-863-81	s	RES, CHIP 100 (1005)
R79	1-208-911-81	s	RES, CHIP 10K (1005)
R80	1-208-899-81	s	RES, CHIP 3.3K (1005)
R81	1-208-895-81	s	RES, CHIP 2.2K (1005)
R82	1-208-903-81	s	RES, CHIP 4.7K (1005)
R83	1-208-903-81	s	RES, CHIP 4.7K (1005)
R84	1-208-919-81	s	RES, CHIP 22K (1005)
R85	1-220-870-81	s	RES, CHIP 10 (1005)
R88	1-208-907-81	s	RES, CHIP 6.8K (1005)
R89	1-208-911-81	s	RES, CHIP 10K (1005)
R90	1-208-907-81	s	RES, CHIP 6.8K (1005)
R91	1-208-935-81	s	RES, CHIP 100K (1005)
R92	1-208-895-81	s	RES, CHIP 2.2K (1005)
R93	1-208-911-81	s	RES, CHIP 10K (1005)
R94	1-208-895-81	s	RES, CHIP 2.2K (1005)
R95	1-208-935-81	s	RES, CHIP 100K (1005)
R96	1-220-878-81	s	RES, CHIP 22 (1005)
R97	1-220-870-81	s	RES, CHIP 10 (1005)
R98	1-220-874-81	s	RES, CHIP 15 (1005)
R99	1-220-874-81	s	RES, CHIP 15 (1005)
R100	1-208-863-81	s	RES, CHIP 100 (1005)
R101	1-208-863-81	s	RES, CHIP 100 (1005)
R103	1-208-887-81	s	RES, CHIP 1.0K (1005)
R104	1-208-903-81	s	RES, CHIP 4.7K (1005)
R105	1-208-903-81	s	RES, CHIP 4.7K (1005)
R106	1-208-915-81	s	RES, CHIP 15K (1005)
R107	1-208-919-81	s	RES, CHIP 22K (1005)
R108	1-208-919-81	s	RES, CHIP 22K (1005)
R109	1-208-903-81	s	RES, CHIP 4.7K (1005)
R110	1-208-919-81	s	RES, CHIP 22K (1005)
R111	1-208-911-81	s	RES, CHIP 10K (1005)
R112	1-208-911-81	s	RES, CHIP 10K (1005)
R113	1-208-899-81	s	RES, CHIP 3.3K (1005)
R114	1-208-907-81	s	RES, CHIP 6.8K (1005)
R115	1-208-911-81	s	RES, CHIP 10K (1005)
R116	1-208-911-81	s	RES, CHIP 10K (1005)
R117	1-208-919-81	s	RES, CHIP 22K (1005)
R118	1-208-863-81	s	RES, CHIP 100 (1005)
R123	1-208-899-81	s	RES, CHIP 3.3K (1005)
R124	1-208-903-81	s	RES, CHIP 4.7K (1005)
R125	1-208-903-81	s	RES, CHIP 4.7K (1005)
R126	1-208-911-81	s	RES, CHIP 10K (1005)
R127	1-208-899-81	s	RES, CHIP 3.3K (1005)
R128	1-208-899-81	s	RES, CHIP 3.3K (1005)
R129	1-208-903-81	s	RES, CHIP 4.7K (1005)
R130	1-208-919-81	s	RES, CHIP 22K (1005)
R131	1-208-899-81	s	RES, CHIP 3.3K (1005)
R132	1-208-919-81	s	RES, CHIP 22K (1005)
R133	1-208-915-81	s	RES, CHIP 15K (1005)
R134	1-208-915-81	s	RES, CHIP 15K (1005)

(TG-260 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R135	1-208-915-81	s	RES, CHIP 15K (1005)
R136	1-208-935-81	s	RES, CHIP 100K (1005)
R137	1-208-935-81	s	RES, CHIP 100K (1005)
R138	1-208-935-81	s	RES, CHIP 100K (1005)
R139	1-208-935-81	s	RES, CHIP 100K (1005)
R140	1-208-959-81	s	RES, CHIP 1M (1005)
R141	1-208-959-81	s	RES, CHIP 1M (1005)
R142	1-208-959-81	s	RES, CHIP 1M (1005)
R143	1-208-935-81	s	RES, CHIP 100K (1005)
R144	1-220-870-81	s	RES, CHIP 10 (1005)
R145	1-220-870-81	s	RES, CHIP 10 (1005)
R146	1-220-870-81	s	RES, CHIP 10 (1005)
R147	1-220-870-81	s	RES, CHIP 10 (1005)
R148	1-208-887-81	s	RES, CHIP 1.0K (1005)
R149	1-208-919-81	s	RES, CHIP 22K (1005)
R150	1-208-915-81	s	RES, CHIP 15K (1005)
R151	1-208-911-81	s	RES, CHIP 10K (1005)
R152	1-208-935-81	s	RES, CHIP 100K (1005)
R153	1-220-878-81	s	RES, CHIP 22 (1005)
R154	1-220-878-81	s	RES, CHIP 22 (1005)
R155	1-220-870-81	s	RES, CHIP 10 (1005)
R156	1-220-878-81	s	RES, CHIP 22 (1005)
R157	1-220-878-81	s	RES, CHIP 22 (1005)
R158	1-220-878-81	s	RES, CHIP 22 (1005)
R159	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R160	1-220-878-81	s	RES, CHIP 22 (1005)
R161	1-208-863-81	s	RES, CHIP 100 (1005)
R162	1-208-863-81	s	RES, CHIP 100 (1005)
R163	1-208-855-81	s	RES, CHIP 47 (1005)
R164	1-208-855-81	s	RES, CHIP 47 (1005)
R165	1-208-855-81	s	RES, CHIP 47 (1005)
R166	1-208-855-81	s	RES, CHIP 47 (1005)
R167	1-208-855-81	s	RES, CHIP 47 (1005)
R168	1-208-863-81	s	RES, CHIP 100 (1005)
R169	1-208-911-81	s	RES, CHIP 10K (1005)
R170	1-208-891-81	s	RES, CHIP 1.5K (1005)
R171	1-208-911-81	s	RES, CHIP 10K (1005)
R172	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R173	1-208-899-81	s	RES, CHIP 3.3K (1005)
R174	1-208-915-81	s	RES, CHIP 15K (1005)
R175	1-208-911-81	s	RES, CHIP 10K (1005)
R176	1-208-931-81	s	RES, CHIP 68K (1005)
R177	1-208-927-81	s	RES, CHIP 47K (1005)
R179	1-208-911-81	s	RES, CHIP 10K (1005)
R180	1-208-911-81	s	RES, CHIP 10K (1005)
R181	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R183	1-208-935-81	s	RES, CHIP 100K (1005)
R184	1-208-887-81	s	RES, CHIP 1.0K (1005)
R185	1-208-935-81	s	RES, CHIP 100K (1005)
R189	1-220-878-81	s	RES, CHIP 22 (1005)
R190	1-220-878-81	s	RES, CHIP 22 (1005)
RB1	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB5	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB6	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB7	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB8	1-234-370-21	s	RES, NETWORK 22 (1005X4)

(TG-260 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB9	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB10	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB11	1-234-378-21	s	RES, NETWORK 10K (1005X4)
X1	1-795-670-12	s	OSCILLATOR, CRYSTAL (VCXO)3.3V
X2	1-795-671-12	s	OSCILLATOR, CRYSTAL (VCXO)3.3V

1-4. Supplied Accessories List

```
--------------------
SUPPLIED ACCESSORIES
--------------------
 Ref. No.
 or Q'ty  Part No.    SP Description

 1pc      A-6772-374-C s BELT ASSY, SHOULDER
 1pc      1-835-427-12 s CORD, WITH XLR CONNECTOR
 1pc    ⚠ 3-297-516-05 s MANUAL (JP), OPERATION
 1pc    ⚠ 3-297-517-05 s MANUAL (GB), OPERATION
 1pc    ⚠ 3-297-518-04 s CD-ROM (700)

 1pc      3-398-062-05 s CD-ROM(XDCAM APPLI SOFT)
```

1-5. Optional Fixtures

```
Part No.    SP Description

J-6026-110-A o BURST CHART
J-6026-130-B o GRAY SCALE CHART
J-6029-140-B o PATTERN BOX
J-6252-510-A o TORQUE DRIVER 6KG-CM
J-6252-520-A o TORQUE DRIVER 12KG-CM

J-6323-430-A o TORQUE SCREWDRIVERÅEfS BIT (M3)
J-6323-530-A o STOP WASHER FASTENING TOOL
J-6325-110-A o BIT FOR TORQUE DRIVER (M1.4)
J-6325-380-A o BIT FOR TORQUE DRIVER (M2)
J-6325-400-A o TORQUE DRIVER (3KG)

J-6394-080-A o GRAY SCALE CHART (16:9)
J-6570-130-A s ALIGNMENT DISK (PFD23A-RS)
3-184-527-01 s CLOTH, CLEANING (150MMX150MM)
3-703-358-08 s PIN,PARALLEL (2X20)(STEEL)
7-432-114-11 s THREE BOND-1401B

7-600-000-48 s SONY BOND (SC608LVZ2) 180ML
9-919-573-01 s HEAD CLEANING LIQUID
```

1-6. CBK-HD01

```
------------
RX-105 BOARD
------------
 Ref. No.
 or Q'ty  Part No.    SP Description

 C100     1-112-692-81 s CAP,CHIP CERAMIC1000PF CH 1005
 C101     1-112-692-81 s CAP,CHIP CERAMIC1000PF CH 1005
 C102     1-112-717-91 s CAP, CERAMIC 1UF B (1005)
 C103     1-112-717-91 s CAP, CERAMIC 1UF B (1005)
 C104     1-125-777-81 s CAP, CHIP CERAMIC 0.1MF B 1005

 C105     1-125-777-81 s CAP, CHIP CERAMIC 0.1MF B 1005
 C106     1-112-717-91 s CAP, CERAMIC 1UF B (1005)
 C107     1-100-567-81 s CAP,CHIP CERAMIC 0.01MF B 1005
 C108     1-125-777-81 s CAP, CHIP CERAMIC 0.1MF B 1005
 C109     1-125-777-81 s CAP, CHIP CERAMIC 0.1MF B 1005

 C110     1-164-858-81 s CAP, CHIP CERAMIC 22PF CH 1005
 C111     1-164-858-81 s CAP, CHIP CERAMIC 22PF CH 1005
 C112     1-107-819-81 s CAP,CHIP CERAMIC 22000PF B1005
 C114     1-125-777-81 s CAP, CHIP CERAMIC 0.1MF B 1005
 C115     1-125-777-81 s CAP, CHIP CERAMIC 0.1MF B 1005

 C116     1-125-777-81 s CAP, CHIP CERAMIC 0.1MF B 1005
 C117     1-125-777-81 s CAP, CHIP CERAMIC 0.1MF B 1005
 C118     1-125-777-81 s CAP, CHIP CERAMIC 0.1MF B 1005
 C119     1-112-717-91 s CAP, CERAMIC 1UF B (1005)
 C122     1-125-777-81 s CAP, CHIP CERAMIC 0.1MF B 1005

 C123     1-125-777-81 s CAP, CHIP CERAMIC 0.1MF B 1005
 C124     1-125-777-81 s CAP, CHIP CERAMIC 0.1MF B 1005
 C125     1-125-777-81 s CAP, CHIP CERAMIC 0.1MF B 1005
 C126     1-125-777-81 s CAP, CHIP CERAMIC 0.1MF B 1005
 C127     1-125-777-81 s CAP, CHIP CERAMIC 0.1MF B 1005

 C128     1-125-777-81 s CAP, CHIP CERAMIC 0.1MF B 1005
 C129     1-125-777-81 s CAP, CHIP CERAMIC 0.1MF B 1005
 C130     1-125-777-81 s CAP, CHIP CERAMIC 0.1MF B 1005
 C131     1-125-777-81 s CAP, CHIP CERAMIC 0.1MF B 1005
 C132     1-125-777-81 s CAP, CHIP CERAMIC 0.1MF B 1005

 C133     1-125-777-81 s CAP, CHIP CERAMIC 0.1MF B 1005
 C200     1-100-159-91 s CAP, CERAMIC 22MF B (SMD) 3216
 C201     1-112-692-81 s CAP,CHIP CERAMIC1000PF CH 1005
 C202     1-125-777-81 s CAP, CHIP CERAMIC 0.1MF B 1005
 C203     1-125-777-81 s CAP, CHIP CERAMIC 0.1MF B 1005

 C204     1-164-874-81 s CAP,CHIP CERAMIC 100PF CH 1005
 C205     1-100-159-91 s CAP, CERAMIC 22MF B (SMD) 3216
 C206     1-100-159-91 s CAP, CERAMIC 22MF B (SMD) 3216
 C207     1-125-777-81 s CAP, CHIP CERAMIC 0.1MF B 1005
 C208     1-112-692-81 s CAP,CHIP CERAMIC1000PF CH 1005

 CN100    1-764-243-31 o CONNECTOR (COAXIAL)

 E100     1-535-757-21 s CHIP, CHECKER

 FB100    1-469-670-21 s FERRITE, EMI (SMD) (2012)

 IC100    6-712-298-01 s IC GS1524ACKDE3
 IC101    6-705-968-01 s IC S-89431ACNC-HBV-TFG
 IC200    6-706-220-01 s IC LTC3411EMS#TR
 IC201    6-706-481-01 s IC TC7SET32FU(T5RSOJF)

 L100     1-414-834-21 s INDUCTOR, CHIP 3.3NH (1005)
 L200     1-419-630-21 s COIL, CHOKE 4.7UH
 L201     1-414-392-41 s INDUCTOR (SMD) 1.0UH

 Q1       6-551-265-01 s TRANSISTOR SI2307BDS-T1

 R100     1-208-860-81 s RES, CHIP 75 (1005)
 R101     1-208-860-81 s RES, CHIP 75 (1005)
 R104     1-208-915-81 s RES, CHIP 15K (1005)
 R105     1-208-887-81 s RES, CHIP 1.0K (1005)
 R106     1-208-911-81 s RES, CHIP 10K (1005)
```

1-7. CBK-SC02

(RX-105 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R108	1-220-878-81	s	RES, CHIP 22 (1005)
R109	1-208-887-81	s	RES, CHIP 1.0K (1005)
R110	1-220-878-81	s	RES, CHIP 22 (1005)
R111	1-220-878-81	s	RES, CHIP 22 (1005)
R114	1-220-878-81	s	RES, CHIP 22 (1005)
R115	1-208-895-81	s	RES, CHIP 2.2K (1005)
R116	1-208-895-81	s	RES, CHIP 2.2K (1005)
R117	1-220-878-81	s	RES, CHIP 22 (1005)
R118	1-208-859-81	s	RES, CHIP 68 (1005)
R119	1-208-911-81	s	RES, CHIP 10K (1005)
R120	1-208-911-81	s	RES, CHIP 10K (1005)
R122	1-208-911-81	s	RES, CHIP 10K (1005)
R125	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R126	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R200	1-208-943-81	s	RES, CHIP 220K (1005)
R201	1-208-943-81	s	RES, CHIP 220K (1005)
R202	1-208-915-81	s	RES, CHIP 15K (1005)
R203	1-208-935-81	s	RES, CHIP 100K (1005)
R204	1-208-887-81	s	RES, CHIP 1.0K (1005)
R205	1-208-943-81	s	RES, CHIP 220K (1005)
R206	1-208-935-81	s	RES, CHIP 100K (1005)
R207	1-208-883-81	s	RES, CHIP 680 (1005)
R208	1-208-931-81	s	RES, CHIP 68K (1005)
R209	1-208-919-81	s	RES, CHIP 22K (1005)
R210	1-208-887-81	s	RES, CHIP 1.0K (1005)
R211	1-220-878-81	s	RES, CHIP 22 (1005)
R212	1-208-943-81	s	RES, CHIP 220K (1005)
R213	1-208-887-81	s	RES, CHIP 1.0K (1005)
R214	1-208-887-81	s	RES, CHIP 1.0K (1005)
R221	1-208-911-81	s	RES, CHIP 10K (1005)
TP1	1-535-757-21	s	CHIP, CHECKER
VDR1	1-802-245-11	s	ESD SUPPRESSOR

PACKING MATERIALS & SUPPLIED ACCESSORIES

Ref. No. or Q'ty	Part No.	SP	Description
3pcs	3-729-076-01	s	SCREW (+B) (2X3)

IV-59 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
C100	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C101	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C102	1-164-882-81	s	CAP,CHIP CERAMIC 220PF CH 1005
C103	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C104	1-164-882-81	s	CAP,CHIP CERAMIC 220PF CH 1005
C105	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C106	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C107	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C108	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C109	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C110	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C111	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C112	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C113	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C114	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C115	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C116	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C117	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C118	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C119	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C120	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C121	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C122	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C123	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C124	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C126	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C127	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C128	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C129	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C131	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C133	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C134	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C135	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C136	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C137	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C138	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C139	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C140	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C141	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C142	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C143	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C144	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C145	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C146	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C147	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C148	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C150	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C151	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C152	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
CN101	1-785-846-91	o	CONNECTOR, BOARD TO BOARD 40P
E100	1-535-877-22	s	CHIP, CHECKER
IC100	6-705-954-01	s	IC XV750CG1-01
IC101	6-702-231-01	s	IC LMH6642MFX/NOPB
IC102	8-749-018-41	s	IC SI-3025LSA-TL
IC103	6-702-231-01	s	IC LMH6642MFX/NOPB
IC104	6-707-853-01	s	IC TC74LCX541FT(EKJ)
IC105	8-759-287-55	s	IC TC7S66FU(TE85R)

(IV-59 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC106	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC107	6-703-238-01	s	IC TC7WZ34FK(TE85R)
IC108	6-702-879-01	s	IC R3112N281A-TR-FA
IC109	8-759-598-42	s	IC TC7WH00FK(TE85R)
L100	1-412-983-41	s	INDUCTOR, SMALL TYPE 2.2UH
L101	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L102	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
Q100	6-551-265-01	s	TRANSISTOR SI2307BDS-T1
Q101	6-551-266-01	s	TRANSISTOR SI2304BDS-T1
Q102	6-551-265-01	s	TRANSISTOR SI2307BDS-T1
Q104	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q105	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q106	8-729-928-28	s	TRANSISTOR DTA144EE-TL
R100	1-208-895-81	s	RES, CHIP 2.2K (1005)
R101	1-208-895-81	s	RES, CHIP 2.2K (1005)
R102	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R103	1-208-860-81	s	RES, CHIP 75 (1005)
R104	1-208-860-81	s	RES, CHIP 75 (1005)
R105	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R106	1-208-879-81	s	RES, CHIP 470 (1005)
R107	1-242-967-81	s	RES, CHIP 1.0 (1005)
R108	1-242-967-81	s	RES, CHIP 1.0 (1005)
R109	1-242-967-81	s	RES, CHIP 1.0 (1005)
R110	1-208-911-81	s	RES, CHIP 10K (1005)
R111	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R112	1-208-911-81	s	RES, CHIP 10K (1005)
R114	1-220-878-81	s	RES, CHIP 22 (1005)
R115	1-220-878-81	s	RES, CHIP 22 (1005)
R116	1-208-899-81	s	RES, CHIP 3.3K (1005)
R117	1-208-899-81	s	RES, CHIP 3.3K (1005)
R118	1-208-951-81	s	RES, CHIP 470K (1005)
R119	1-208-951-81	s	RES, CHIP 470K (1005)
R120	1-208-887-81	s	RES, CHIP 1.0K (1005)
R121	1-208-887-81	s	RES, CHIP 1.0K (1005)
R122	1-208-951-81	s	RES, CHIP 470K (1005)
R123	1-220-878-81	s	RES, CHIP 22 (1005)
R124	1-208-911-81	s	RES, CHIP 10K (1005)
R125	1-208-911-81	s	RES, CHIP 10K (1005)
R127	1-208-911-81	s	RES, CHIP 10K (1005)
R128	1-208-911-81	s	RES, CHIP 10K (1005)
R130	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R133	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R134	1-208-911-81	s	RES, CHIP 10K (1005)
R135	1-208-911-81	s	RES, CHIP 10K (1005)
R136	1-208-935-81	s	RES, CHIP 100K (1005)
R137	1-218-990-81	s	CONDUCTOR, CHIP (1005)
RB100	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB101	1-234-370-21	s	RES, NETWORK 22 (1005X4)
TP100	1-535-877-22	s	CHIP, CHECKER
X100	1-795-831-12	s	OSCILLATOR, CRYSTAL (VCXO)3.3V


PACKING MATERIALS & SUPPLIED ACCESSORIES

Ref. No. or Q'ty	Part No.	SP	Description
2pcs	3-855-938-01	s	SCREW


Section 2
Block Diagrams

Index


Board Name	Function	Page
Overall (Camera)	–	2-2
Overall (VDR)	–	2-3
Overall (Drive)	–	2-4
AT-177	Camera system control	2-17
AXM-38	Audio Line IN/OUT connector	2-8
CI-37	Interface for camera adaptor	2-19
CN-2946	Ethernet connector	2-14
CN-2947	Connector	2-10, 12
CN-2948	IEEE1394 connector	2-15
CN-3001	Front Mic connector	2-11
CN-3005	VF/Light connector	2-9
CN-3025	Lens connector	2-18
CN-3026	USB connector	2-15
CNB-25	Power source controller	2-8
DCP-49A	Camera video signal processor	2-16
DET-45	Panel reverse detector	2-23
DET-47	XLR plug detector	2-8
DR-606	Disc drive processor	2-5
DR-617	CCD driver	2-10
DVP-45	VDR main processor	2-20
ENC-118	MENU control	2-23
FP-157	Analog audio processor	2-22
HP-148	Earphone (front)	2-22
HP-149	Earphone (rear)	2-22
IO-235	BNC IN/OUT	2-18
IV-59 (CBK-SC02)	Analog composite input	2-21
KY-623	Function key	2-23
LED-444	LED backlight	2-23
MA-162	Mic Amp	2-11
MB-1111	–	2-9, 23
MS-86	Memory stick	2-17
PA-342A	CCD preamplifier	2-10
PA-343A	CCD preamplifier	2-10
PA-344	CCD preamplifier	2-10
PD-118	LCD driver	2-23
PS-708	Double-Layer capacitor	2-9
PS-731	Power supply (Light)	2-9
RE-246	Regulator	2-24
RM-216	Remote connector	2-18
RX-101	Wireless receiver interface	2-22
RX-105 (CBK-HD01)	HD/SD SDI input	2-19
SE-709	Loader position sensor	2-6
SE-803	Filter position sensor	2-12
SE-857	Spindle motor/DEW sensor	2-6
SE-858	Seek motor	2-6
SW-1125G	Cartridge sensor switch	2-6
SW-1249	Assign switch	2-9
SW-1352	+48V selector	2-8
SW-1385	EJECT	2-21
SW-1391	OUTPUT/GAIN switch	2-23
SW-1425	–	2-18
SW-1426	Light switch	2-9
SY-355	DVR system control	2-13
TG-260	Timing generator	2-10, 12

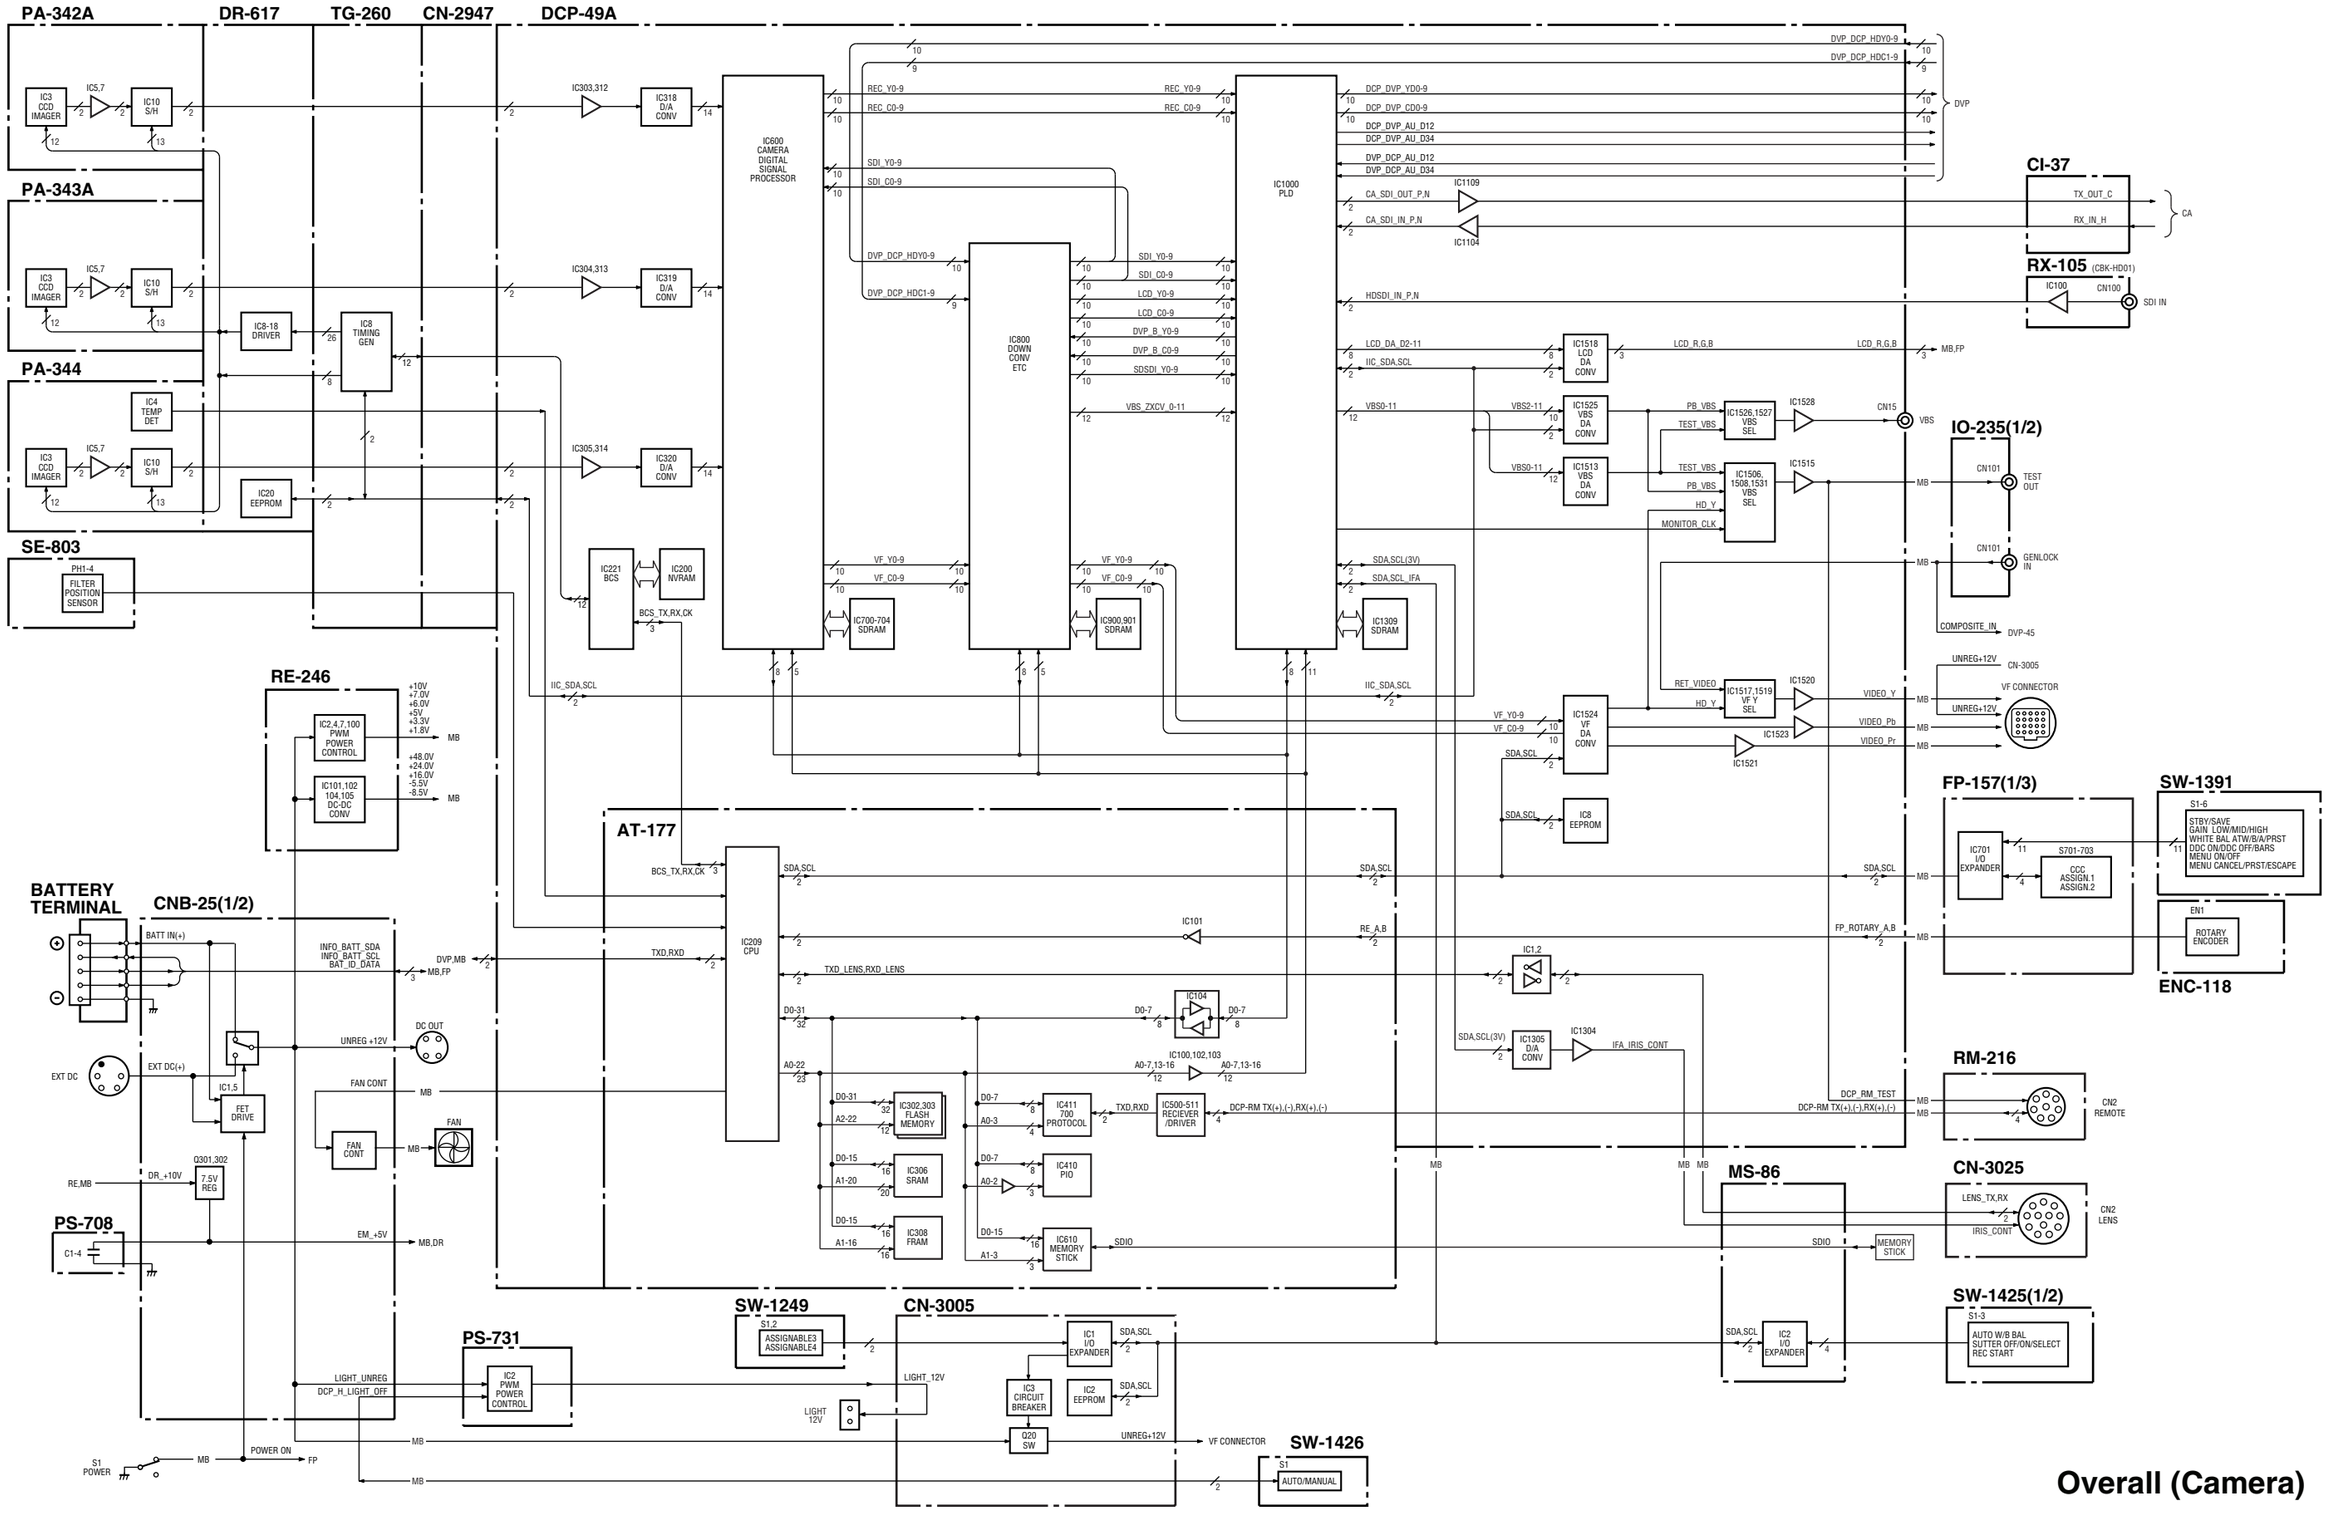


Overall (Camera)

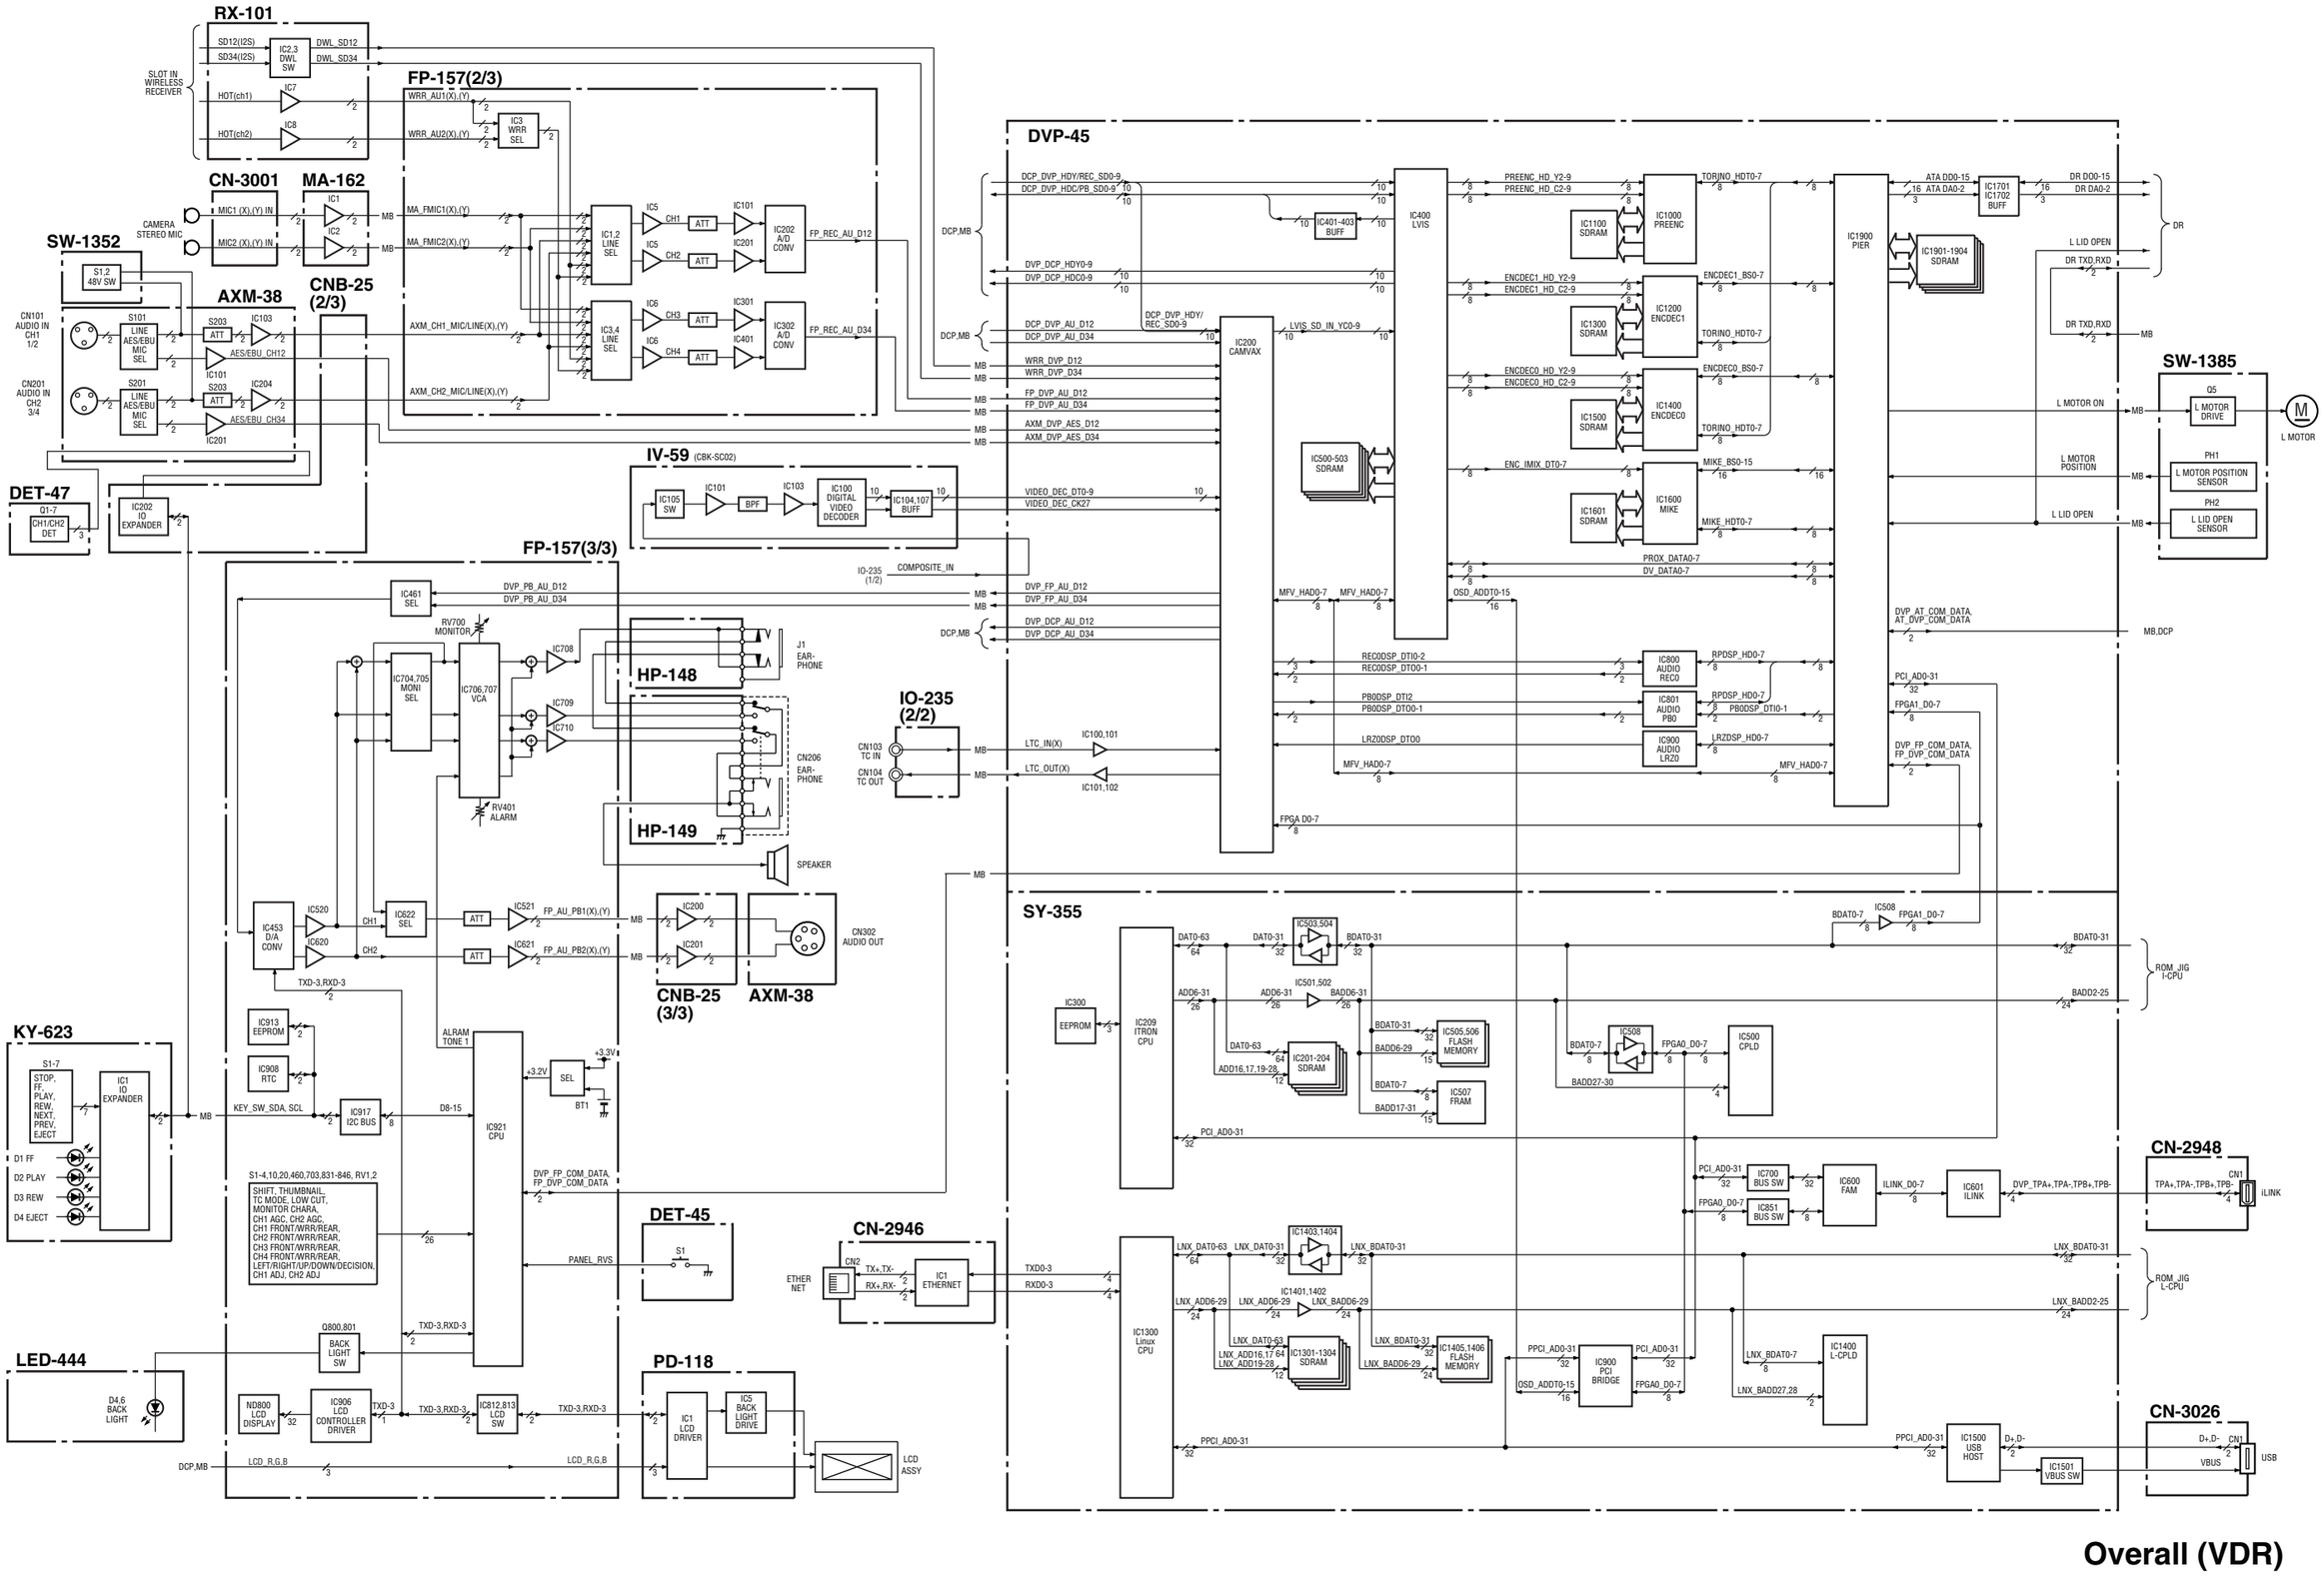
RX-101
SLOT IN WIRELESS RECEIVER
SD12(I2S)
SD34(I2S)
IC2,3 DWL SW
DWL_SD12
DWL_SD34
HOT(ch1)
HOT(ch2)
IC7
IC8
FP-157(2/3)
WRR_AU1(X),(Y)
WRR_AU2(X),(Y)
IC3 WRR SEL
CN-3001
MA-162
CAMERA STEREO MIC
MIC1 (X),(Y) IN
MIC2 (X),(Y) IN
IC1
IC2
MB
MA_FMIC1(X),(Y)
MA_FMIC2(X),(Y)
SW-1352
S1,2 48V SW
AXM-38
CNB-25 (2/3)
CN101 AUDIO IN CH1 1/2
CN201 AUDIO IN CH2 3/4
S101
S201
LINE AES/EBU MIC SEL
S203
ATT
IC103
IC204
AES/EBU_CH12
AES/EBU_CH34
IC101
IC201
IC1,2 LINE SEL
IC3,4 LINE SEL
IC5
IC6
CH1
CH2
CH3
CH4
ATT
IC101
IC201
IC301
IC401
IC202 A/D CONV
IC302 A/D CONV
FP_REC_AU_D12
FP_REC_AU_D34
AXM_CH1_MIC/LINE(X),(Y)
AXM_CH2_MIC/LINE(X),(Y)
DET-47
Q1-7
CH1/CH2 DET
IC202 IO EXPANDER
IV-59 (CBK-SC02)
IC105 SW
IC101
BPF
IC103
IC100 DIGITAL VIDEO DECODER
IC104 107 BUFF
VIDEO_DEC_DT0-9
VIDEO_DEC_CK27
FP-157(3/3)
IO-235 (1/2)
COMPOSITE_IN
IC461 SEL
DVP_PB_AU_D12
DVP_PB_AU_D34
DVP_FP_AU_D12
DVP_FP_AU_D34
DVP_DCP_AU_D12
DVP_DCP_AU_D34
DCP,MB
RV700 MONITOR
IC704,705 MONI SEL
IC706,707 VCA
IC708
IC709
IC710
RV401 ALARM
HP-148
HP-149
J1 EAR-PHONE
CN206 EAR-PHONE
SPEAKER
IO-235 (2/2)
CN103 TC IN
CN104 TC OUT
LTC_IN(X)
LTC_OUT(X)
IC100,101
IC101,102
DVP-45
DCP_DVP_HDY/REC_SD0-9
DCP_DVP_HDC/PB_SD0-9
DVP_DCP_HDY0-9
DVP_DCP_HDC0-9
IC401-403 BUFF
IC400 LVIS
IC200 CAMVAX
LVIS_SD_IN_YC0-9
DCP_DVP_AU_D12
DCP_DVP_AU_D34
WRR_DVP_D12
WRR_DVP_D34
FP_DVP_AU_D12
FP_DVP_AU_D34
AXM_DVP_AES_D12
AXM_DVP_AES_D34
ICS00-503 SDRAM
PREENC_HD_Y2-9
PREENC_HD_C2-9
IC1100 SDRAM
IC1000 PREENC
TORINO_HDT0-7
ENCDEC1_HD_Y2-9
ENCDEC1_HD_C2-9
IC1300 SDRAM
IC1200 ENCDEC1
ENCDEC1_BS0-7
ENCDEC0_HD_Y2-9
ENCDEC0_HD_C2-9
IC1500 SDRAM
IC1400 ENCDEC0
ENCDEC0_BS0-7
ENC_IMIX_DT0-7
IC1601 SDRAM
IC1600 MIKE
MIKE_BS0-15
MIKE_HDT0-7
PROX_DATA0-7
DV_DATA0-7
MFV_HAD0-7
OSD_ADDT0-15
IC1900 PIER
IC1901-1904 SDRAM
ATA DD0-15
ATA DA0-2
IC1701 IC1702 BUFF
DR DD0-15
DR DA0-2
DR
L LID OPEN
DR TXD,RXD
SW-1385
Q5
L MOTOR DRIVE
L MOTOR ON
L MOTOR POSITION
PH1
L MOTOR POSITION SENSOR
PH2
L LID OPEN SENSOR
L MOTOR
DVP_AT_COM_DATA
AT_DVP_COM_DATA
MB,DCP
REC0DSP_DTI0-2
REC0DSP_DTO0-1
IC800 AUDIO RECO
RPDSP_HD0-7
PB0DSP_DTI2
PB0DSP_DTO0-1
IC801 AUDIO PB0
PB0DSP_DTI0-1
LRZ0DSP_DTO0
IC900 AUDIO LRZ0
LRZDSP_HD0-7
PCI_AD0-31
FPGA1_D0-7
DVP_FP_COM_DATA
FP_DVP_COM_DATA
FPGA D0-7
SY-355
IC300 EEPROM
IC209 ITRON CPU
DAT0-63
DAT0-31
IC503,504
BDAT0-31
ADD6-31
IC501,502
BADD6-31
IC505,506 FLASH MEMORY
IC201-204 SDRAM
IC507 FRAM
IC508
FPGA0_D0-7
IC500 CPLD
BADD27-30
ROM_JIG I-CPU
BADD2-25
IC1300 Linux CPU
IC1403,1404
LNX_DAT0-63
LNX_DAT0-31
LNX_BDAT0-31
LNX_ADD6-29
IC1401,1402
LNX_BADD6-29
IC1301-1304 SDRAM
IC1405,1406 FLASH MEMORY
IC1400 L-CPLD
LNX_BADD27,28
ROM_JIG L-CPU
IC900 PCI BRIDGE
PCI_AD0-31
PPCI_AD0-31
QSD_ADDT0-15
IC700 BUS SW
IC851 BUS SW
IC600 FAM
IC601 ILINK
ILINK_D0-7
DVP_TPA+,TPA-,TPB+,TPB-
CN-2948
CN1
iLINK
IC1500 USB HOST
D+,D-
VBUS
IC1501 VBUS SW
CN-3026
USB
KY-623
S1-7
STOP, FF, PLAY, REW, NEXT, PREV, EJECT
IC1 IO EXPANDER
D1 FF
D2 PLAY
D3 REW
D4 EJECT
KEY_SW_SDA, SCL
IC913 EEPROM
IC908 RTC
IC917 I2C BUS
D8-15
IC921 CPU
ALRAM TONE 1
+3.2V
SEL
+3.3V
BT1
S1-4,10,20,460,703,831-846, RV1,2
SHIFT, THUMBNAIL, TC MODE, LOW CUT, MONITOR CHARA, CH1 AGC, CH2 AGC, CH1 FRONT/WRR/REAR, CH2 FRONT/WRR/REAR, CH3 FRONT/WRR/REAR, CH4 FRONT/WRR/REAR, LEFT/RIGHT/UP/DOWN/DECISION, CH1 ADJ, CH2 ADJ
DVP_FP_COM_DATA, FP_DVP_COM_DATA
PANEL_RVS
DET-45
S1
CN-2946
ETHER NET
CN2
TX+,TX-
RX+,RX-
IC1 ETHERNET
TXD0-3
RXD0-3
LED-444
D4,6 BACK LIGHT
Q800,801
BACK LIGHT SW
TXD-3,RXD-3
ND800 LCD DISPLAY
IC906 LCD CONTROLLER DRIVER
TXD-3
IC812,813 LCD SW
PD-118
IC1 LCD DRIVER
IC5 BACK LIGHT DRIVE
LCD ASSY
LCD_R,G,B
DCP,MB
IC520
IC620
IC453 D/A CONV
IC622 SEL
IC521
IC621
FP_AU_PB1(X),(Y)
FP_AU_PB2(X),(Y)
IC200
IC201
CN302 AUDIO OUT
CNB-25 (3/3)
AXM-38


Overall (VDR)

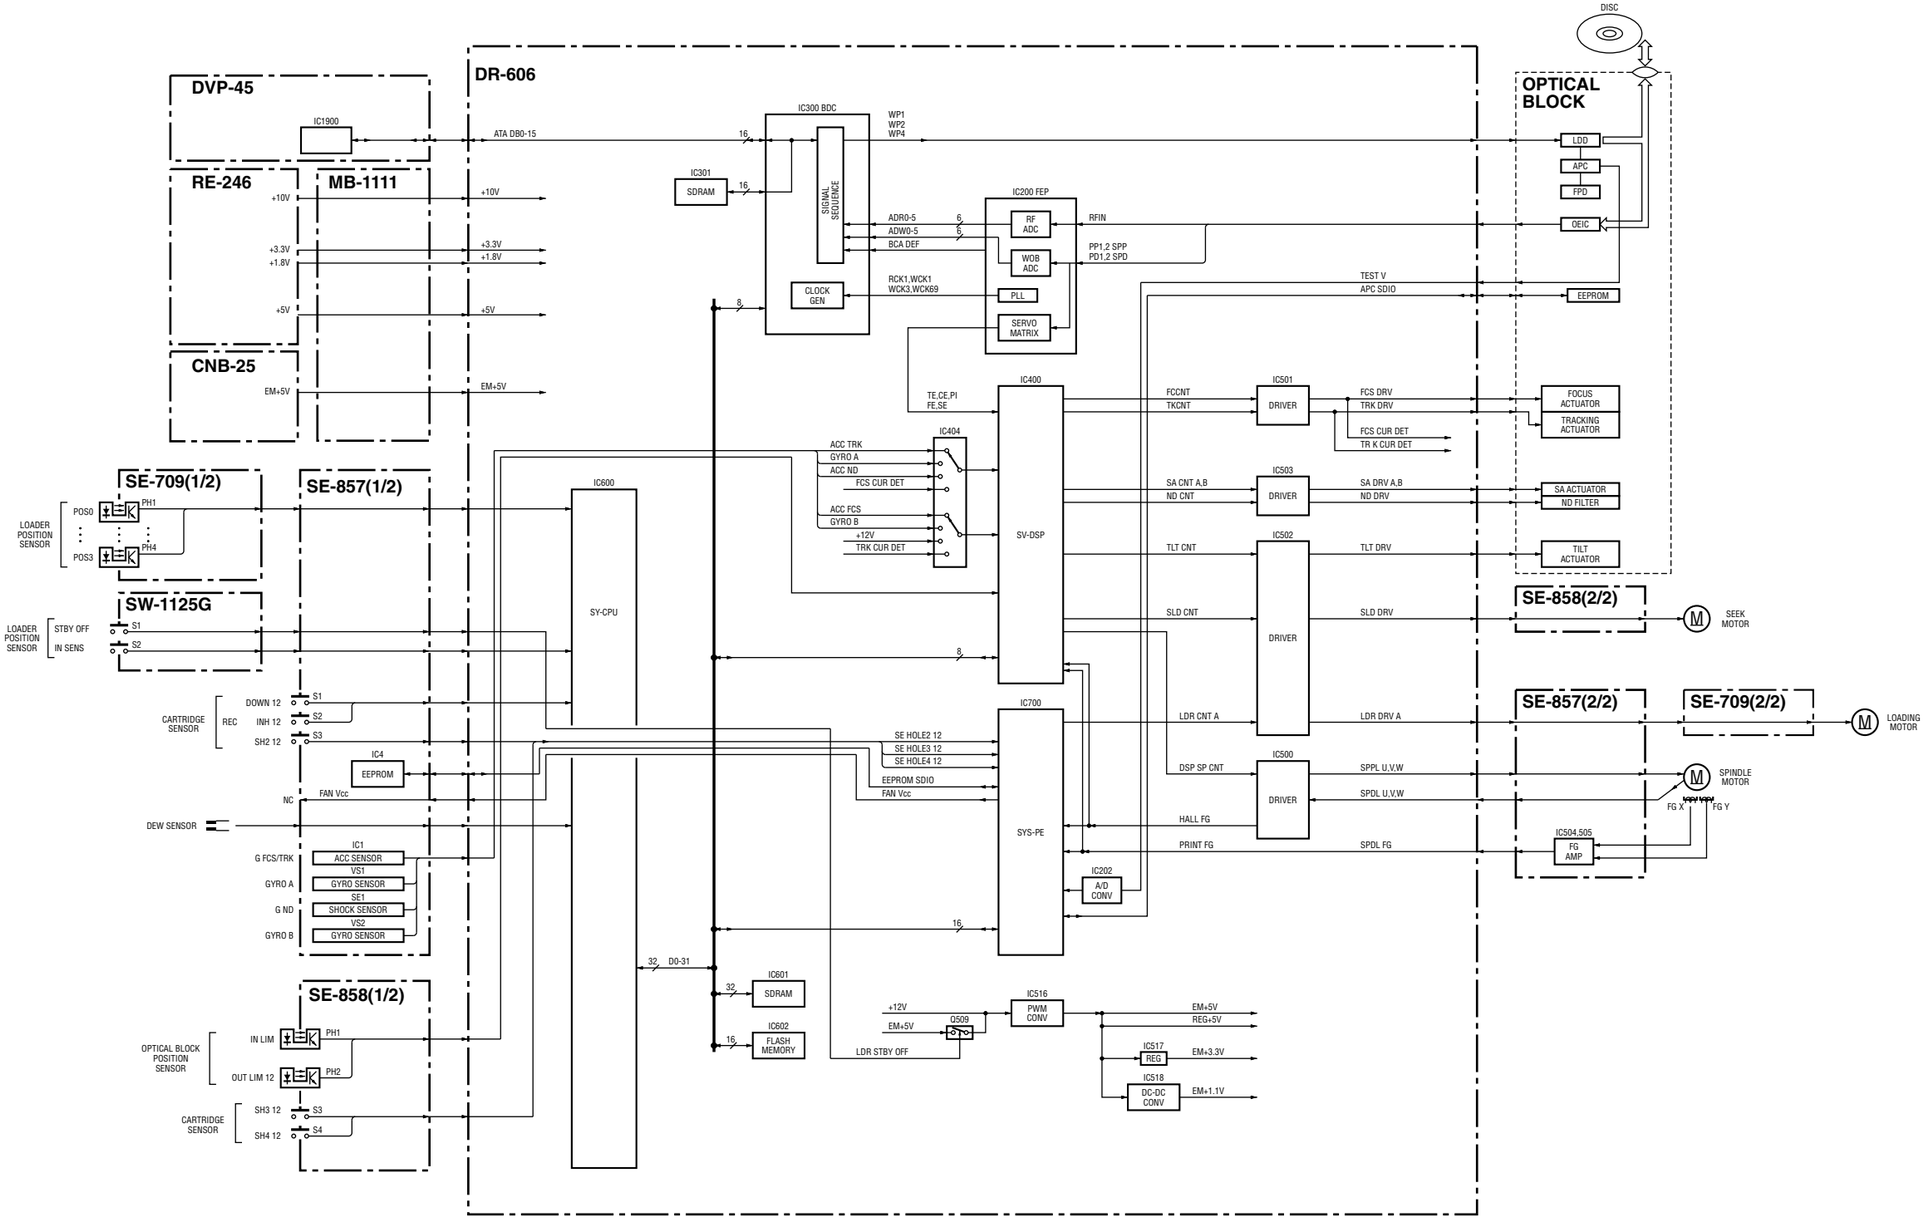
DISC
DR-606
DVP-45
IC1900
ATA DB0-15
RE-246
MB-1111
+10V
+3.3V
+1.8V
+5V
CNB-25
EM+5V
IC300 BDC
WP1
WP2
WP4
IC301
SDRAM
SIGNAL SEQUENCE
CLOCK GEN
IC200 FEP
RF ADC
WOB ADC
PLL
SERVO MATRIX
ADR0-5
ADW0-5
BCA DEF
RCK1,WCK1
WCK3,WCK69
RFIN
PP1,2 SPP
PD1,2 SPD
OPTICAL BLOCK
LDD
APC
FPD
OEIC
EEPROM
TEST V
APC SDIO
IC400
TE,CE,PI
FE,SE
IC404
ACC TRK
GYRO A
ACC ND
FCS CUR DET
ACC FCS
GYRO B
+12V
TRK CUR DET
SV-DSP
IC501
DRIVER
FCCNT
TKCNT
FCS DRV
TRK DRV
FCS CUR DET
TR K CUR DET
FOCUS ACTUATOR
TRACKING ACTUATOR
IC503
SA CNT A,B
ND CNT
SA DRV A,B
ND DRV
SA ACTUATOR
ND FILTER
IC502
TLT CNT
TLT DRV
TILT ACTUATOR
SLD CNT
SLD DRV
SE-858(2/2)
SEEK MOTOR
IC700
LDR CNT A
LDR DRV A
SE-857(2/2)
SE-709(2/2)
LOADING MOTOR
IC500
DSP SP CNT
SPPL U,V,W
SPDL U,V,W
SPINDLE MOTOR
FG X
FG Y
HALL FG
PRINT FG
SPDL FG
IC504,505
FG AMP
SYS-PE
IC202
A/D CONV
SE HOLE2 12
SE HOLE3 12
SE HOLE4 12
EEPROM SDIO
FAN Vcc
SE-709(1/2)
LOADER POSITION SENSOR
POS0
POS3
PH1
PH4
SE-857(1/2)
SW-1125G
STBY OFF
IN SENS
S1
S2
IC600
SY-CPU
CARTRIDGE SENSOR
REC
DOWN 12
INH 12
SH2 12
S3
IC4
EEPROM
NC
FAN Vcc
DEW SENSOR
IC1
G FCS/TRK
ACC SENSOR
GYRO A
VS1
GYRO SENSOR
SE1
G ND
SHOCK SENSOR
GYRO B
VS2
GYRO SENSOR
SE-858(1/2)
OPTICAL BLOCK POSITION SENSOR
IN LIM
OUT LIM 12
PH2
SH3 12
SH4 12
S4
D0-31
IC601
SDRAM
IC602
FLASH MEMORY
LDR STBY OFF
Q509
IC516
PWM CONV
EM+5V
REG+5V
IC517
REG
EM+3.3V
IC518
DC-DC CONV
EM+1.1V

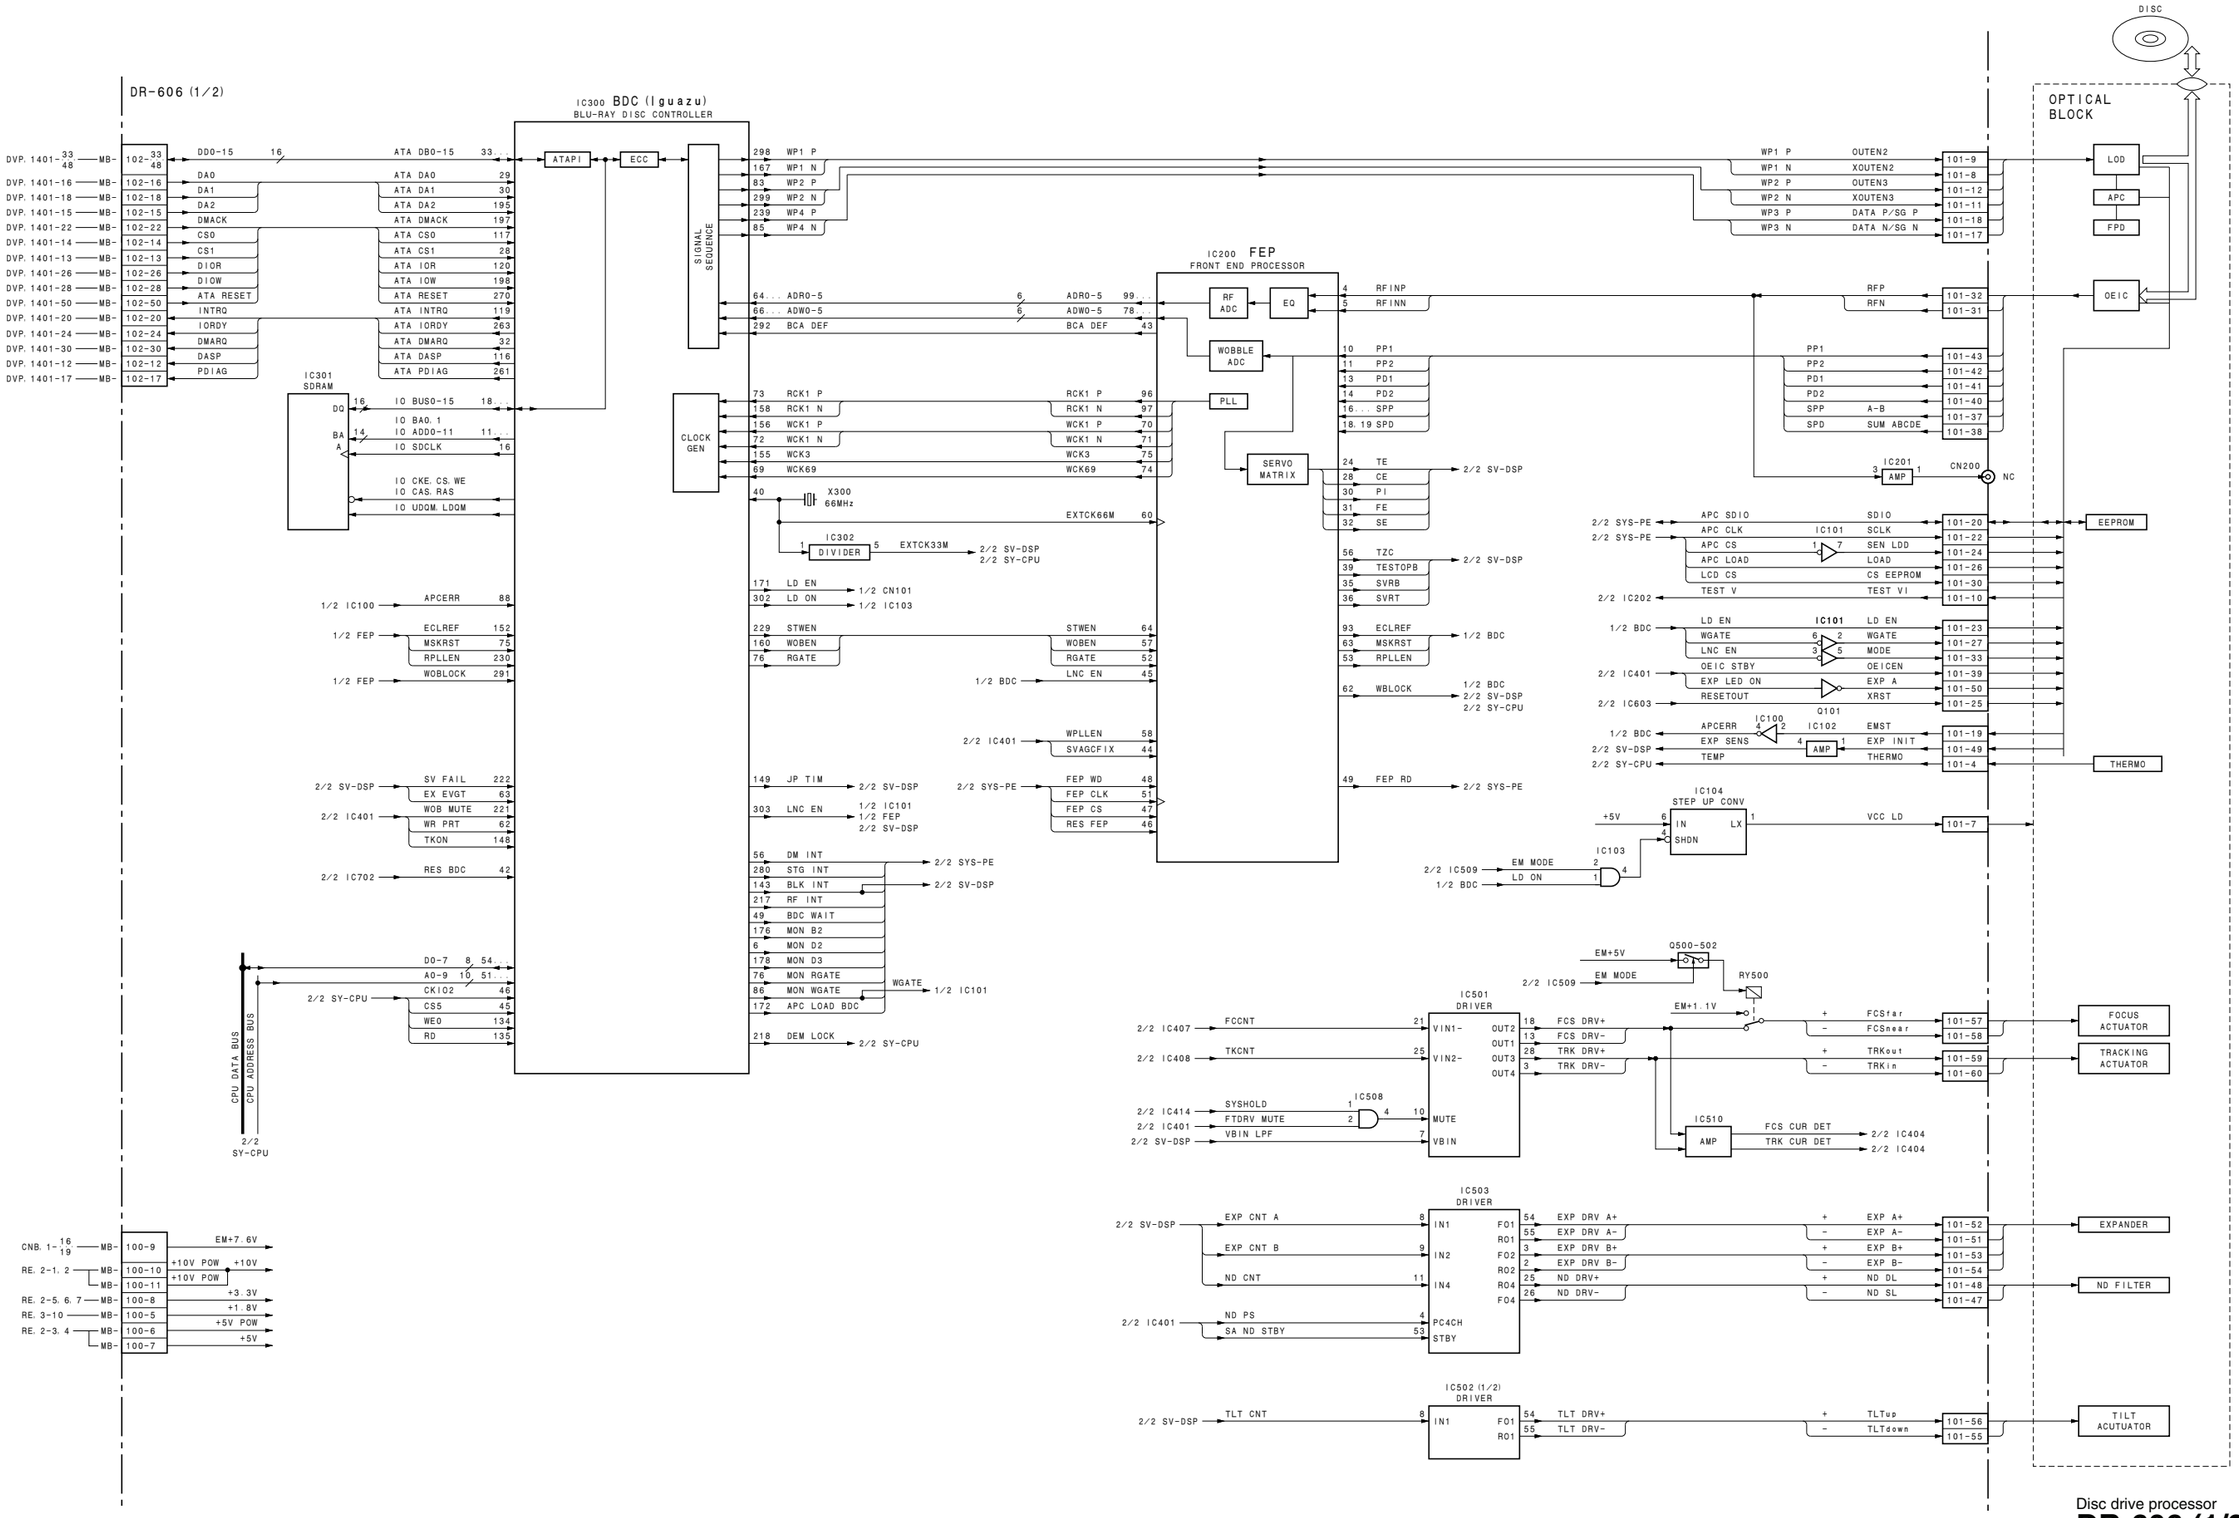


Disc drive processor
DR-606 (1/2)

2-5

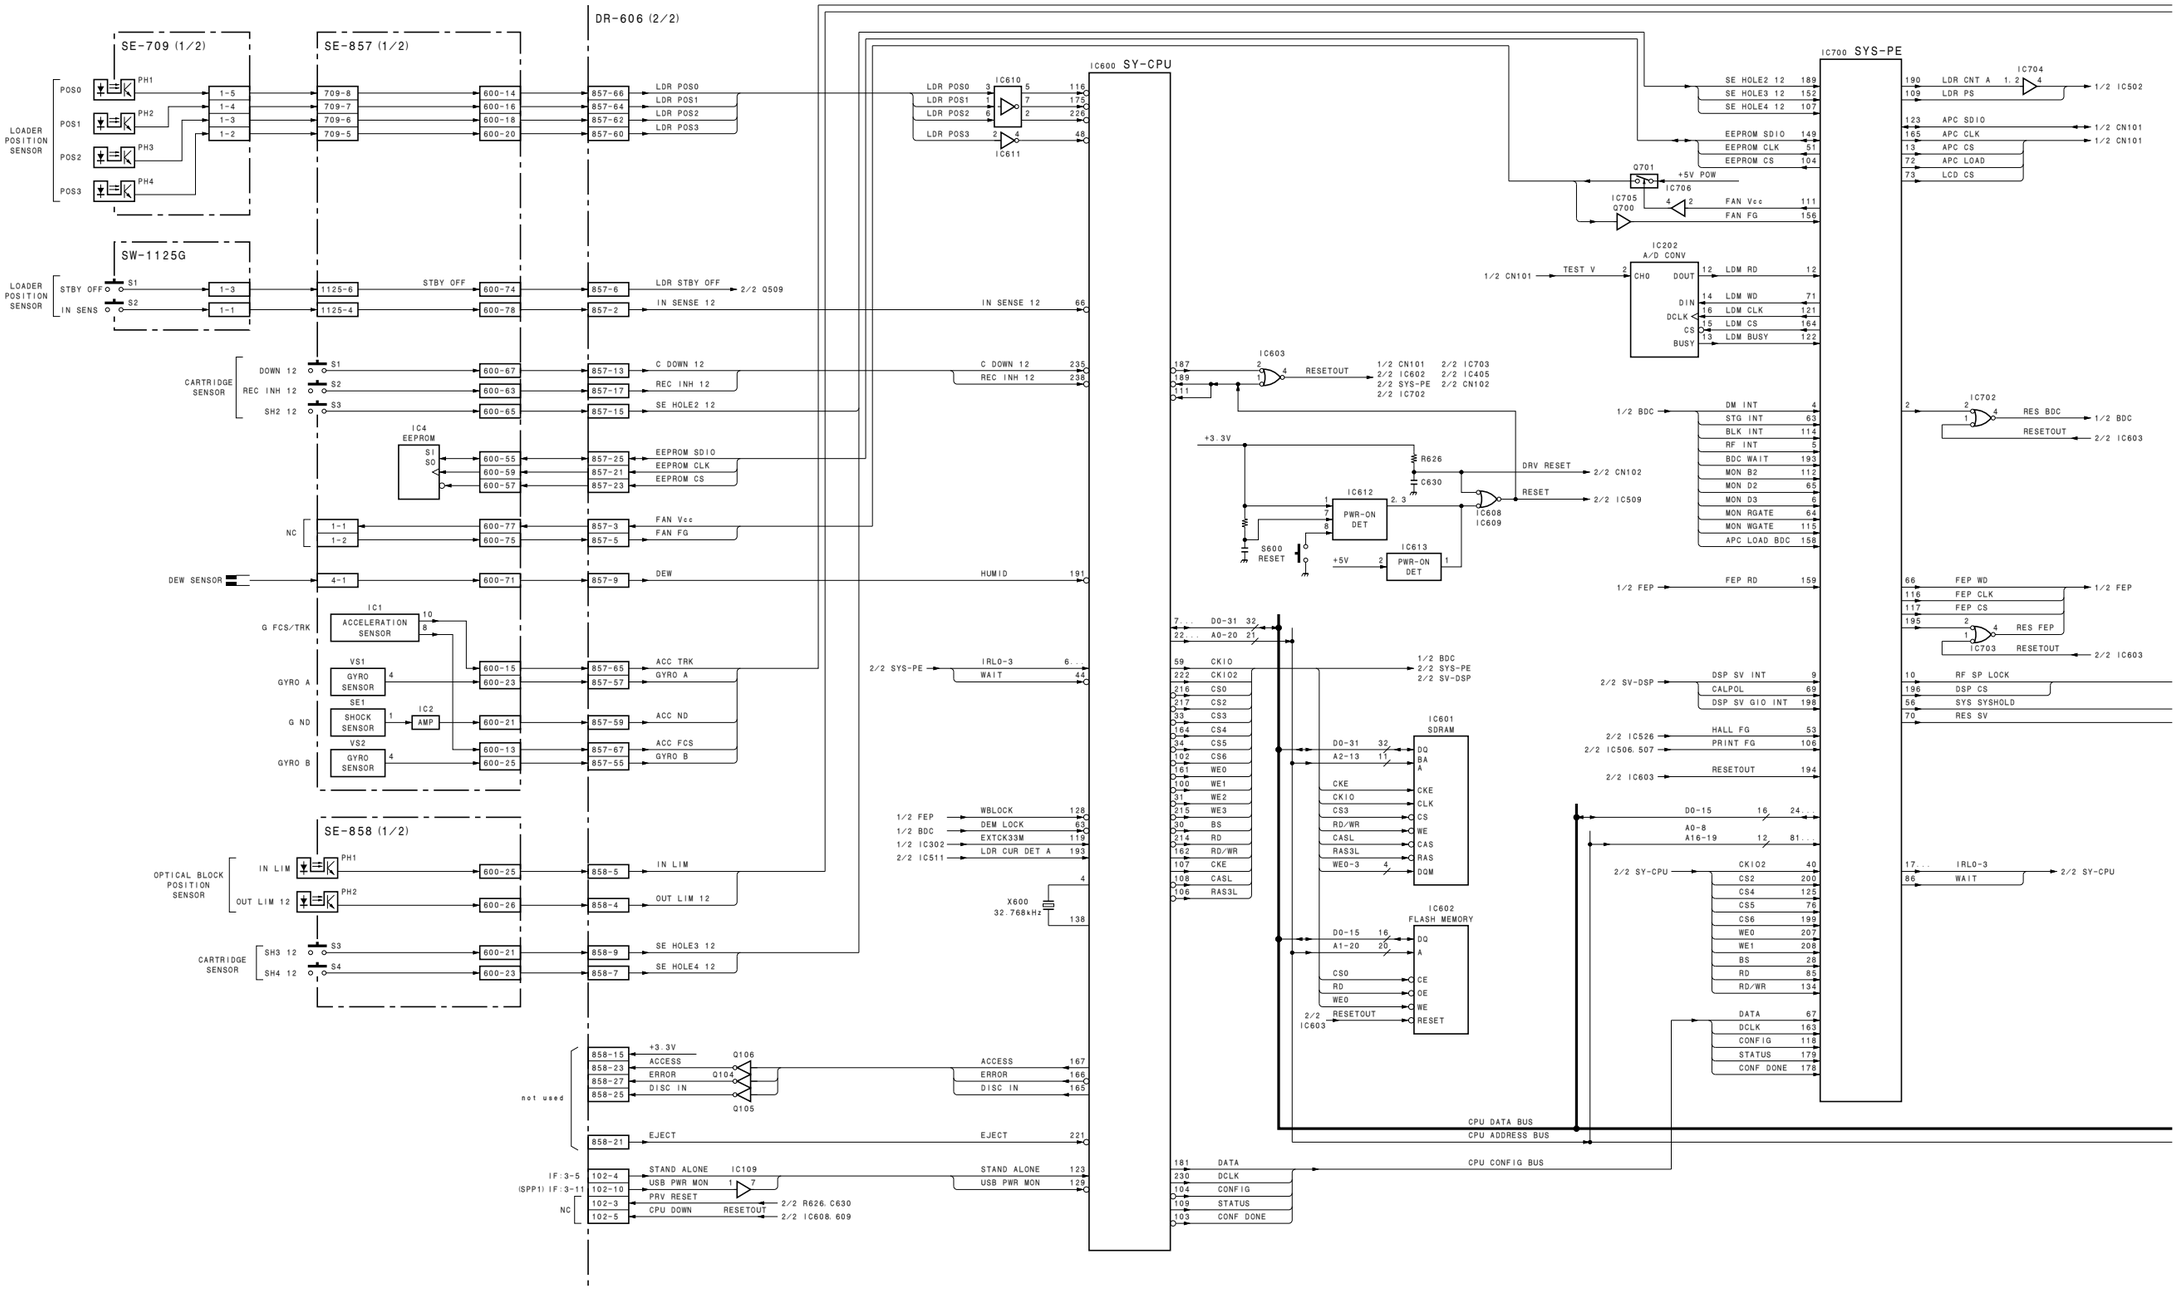
DR-606 (2/2)
SE-709 (1/2)
SE-857 (1/2)
SW-1125G
SE-858 (1/2)
IC600 SY-CPU
IC700 SYS-PE
IC601 SDRAM
IC602 FLASH MEMORY
LOADER POSITION SENSOR
CARTRIDGE SENSOR
OPTICAL BLOCK POSITION SENSOR
IC4 EEPROM
IC1 ACCELERATION SENSOR
IC2 AMP
IC202 A/D CONV
IC610
IC611
IC603
IC612
IC613
IC608
IC609
IC704
IC702
IC703
Q700
Q701
IC706
IC705
X600 32.768kHz
S600 RESET
R626
C630
+5V POW
+3.3V
CPU DATA BUS
CPU ADDRESS BUS
CPU CONFIG BUS
LDR POS0
LDR POS1
LDR POS2
LDR POS3
LDR STBY OFF
IN SENSE 12
C DOWN 12
REC INH 12
SE HOLE2 12
SE HOLE3 12
SE HOLE4 12
EEPROM SDIO
EEPROM CLK
EEPROM CS
FAN Vcc
FAN FG
DEW
HUMID
ACC TRK
GYRO A
ACC ND
ACC FCS
GYRO B
IN LIM
OUT LIM 12
WBLOCK
DEM LOCK
EXTCK33M
LDR CUR DET A
ACCESS
ERROR
DISC IN
EJECT
STAND ALONE
USB PWR MON
PRV RESET
CPU DOWN
RESETOUT
IRL0-3
WAIT
TEST V
LDM RD
LDM WD
LDM CLK
LDM CS
LDM BUSY
DM INT
STG INT
BLK INT
RF INT
BDC WAIT
MON B2
MON D2
MON D3
MON RGATE
MON WGATE
APC LOAD BDC
FEP RD
DSP SV INT
CALPOL
DSP SV GIO INT
HALL FG
PRINT FG
LDR CNT A
LDR PS
APC SDIO
APC CLK
APC CS
APC LOAD
LCD CS
RES BDC
FEP WD
FEP CLK
FEP CS
RES FEP
RF SP LOCK
DSP CS
SYS SYSHOLD
RES SV
DRV RESET
RESET
not used

DR-606 (2/2), SE-709, SE-857, SE-858, SW-1125G

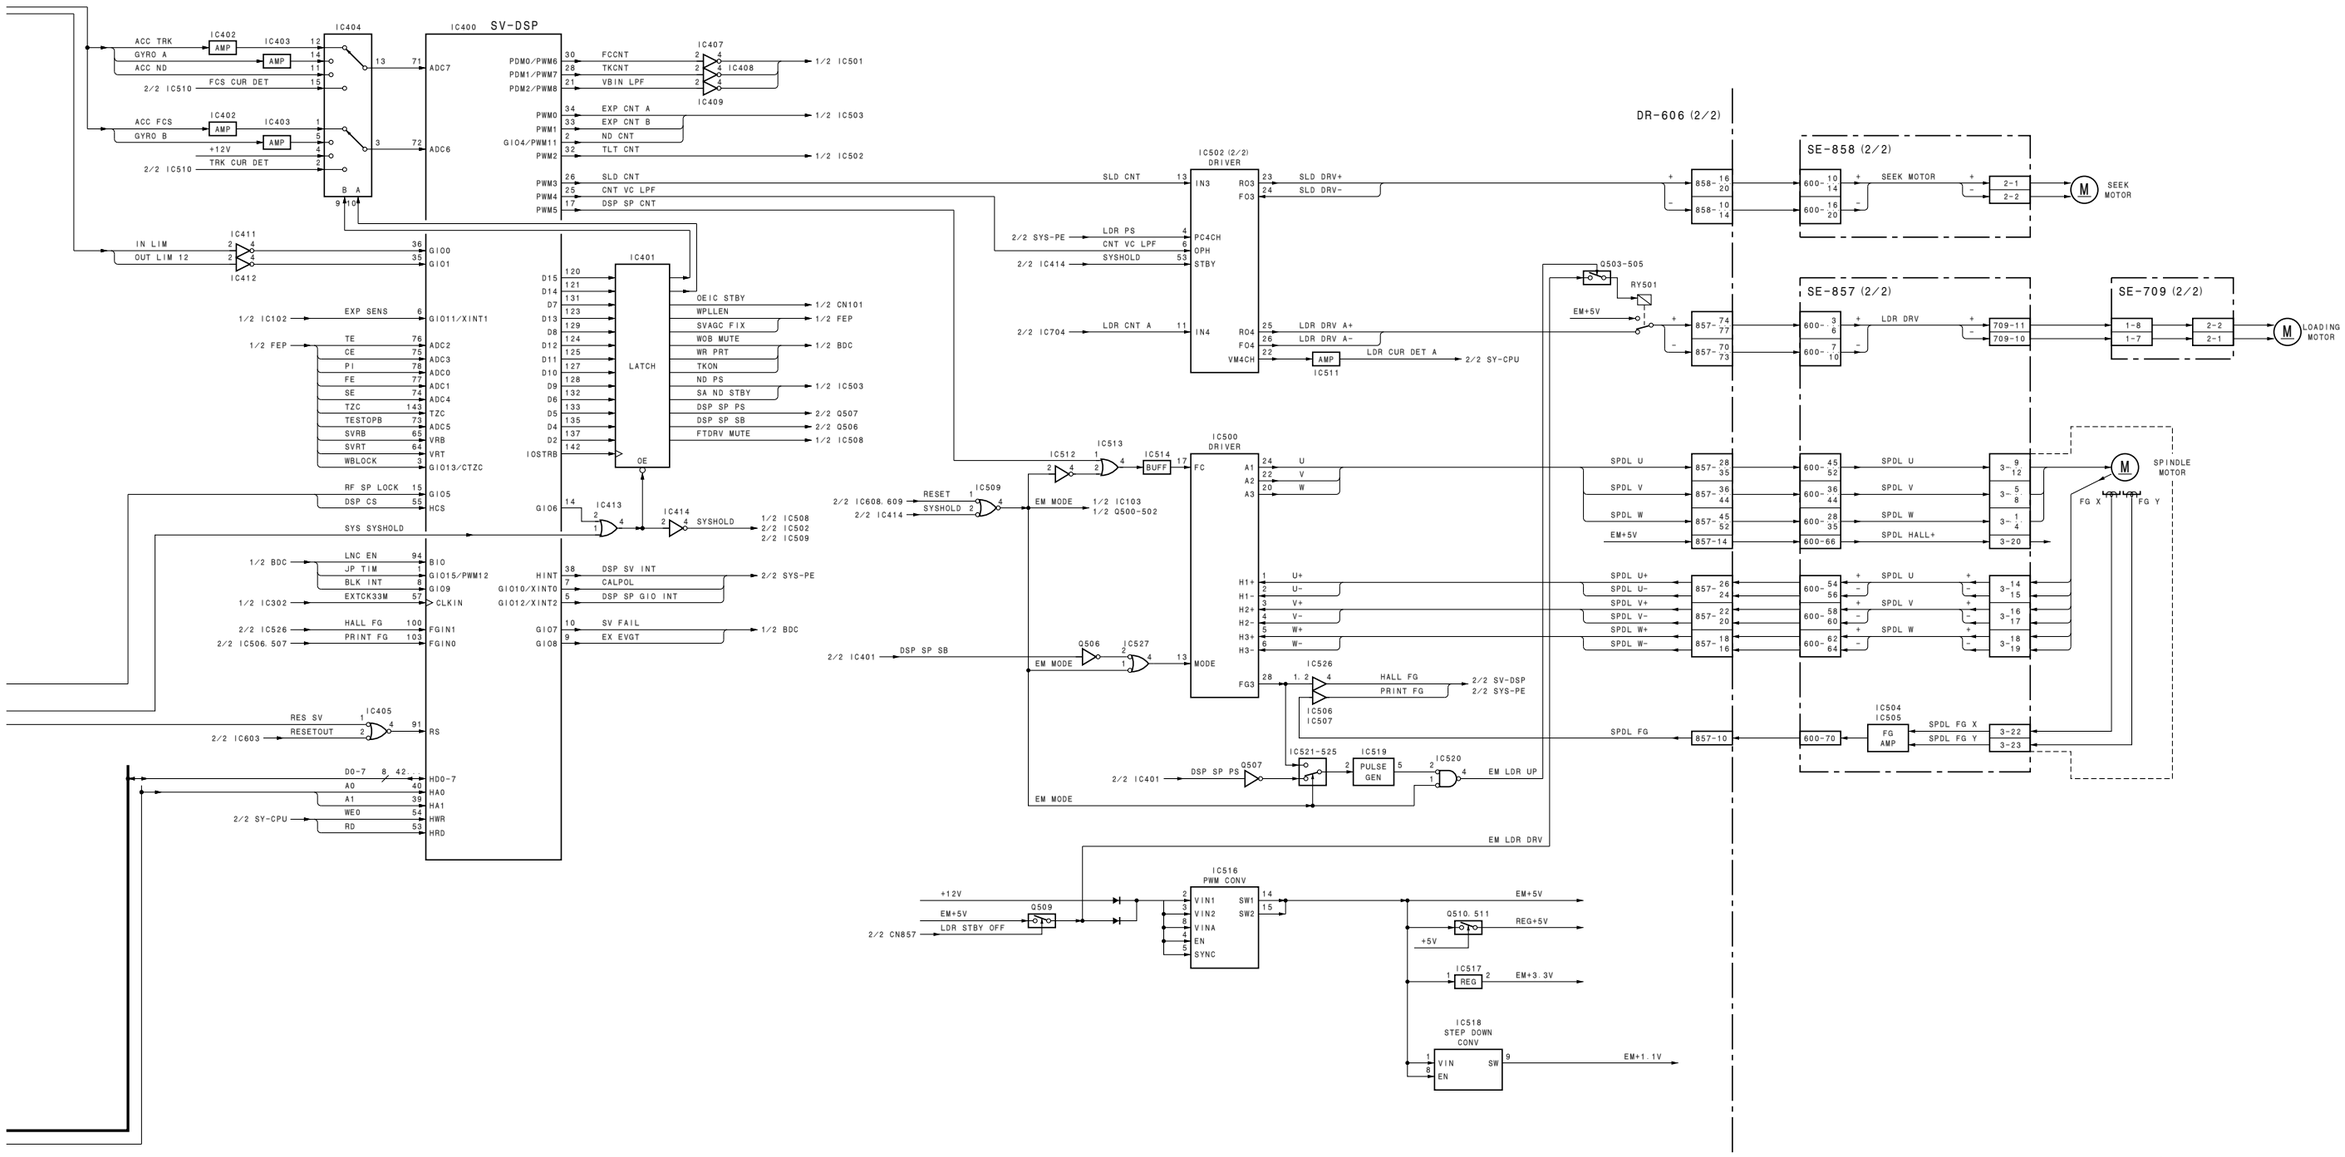

Disc drive processor
DR-606 (2/2)


Loader position sensor
SE-709

Spindle motor/DEW sensor
SE-857

Seek motor
SE-858

Cartridge sensor switch
SW-1125G

AXM-38, CNB-25 (1/2), DET-47, SW-1352

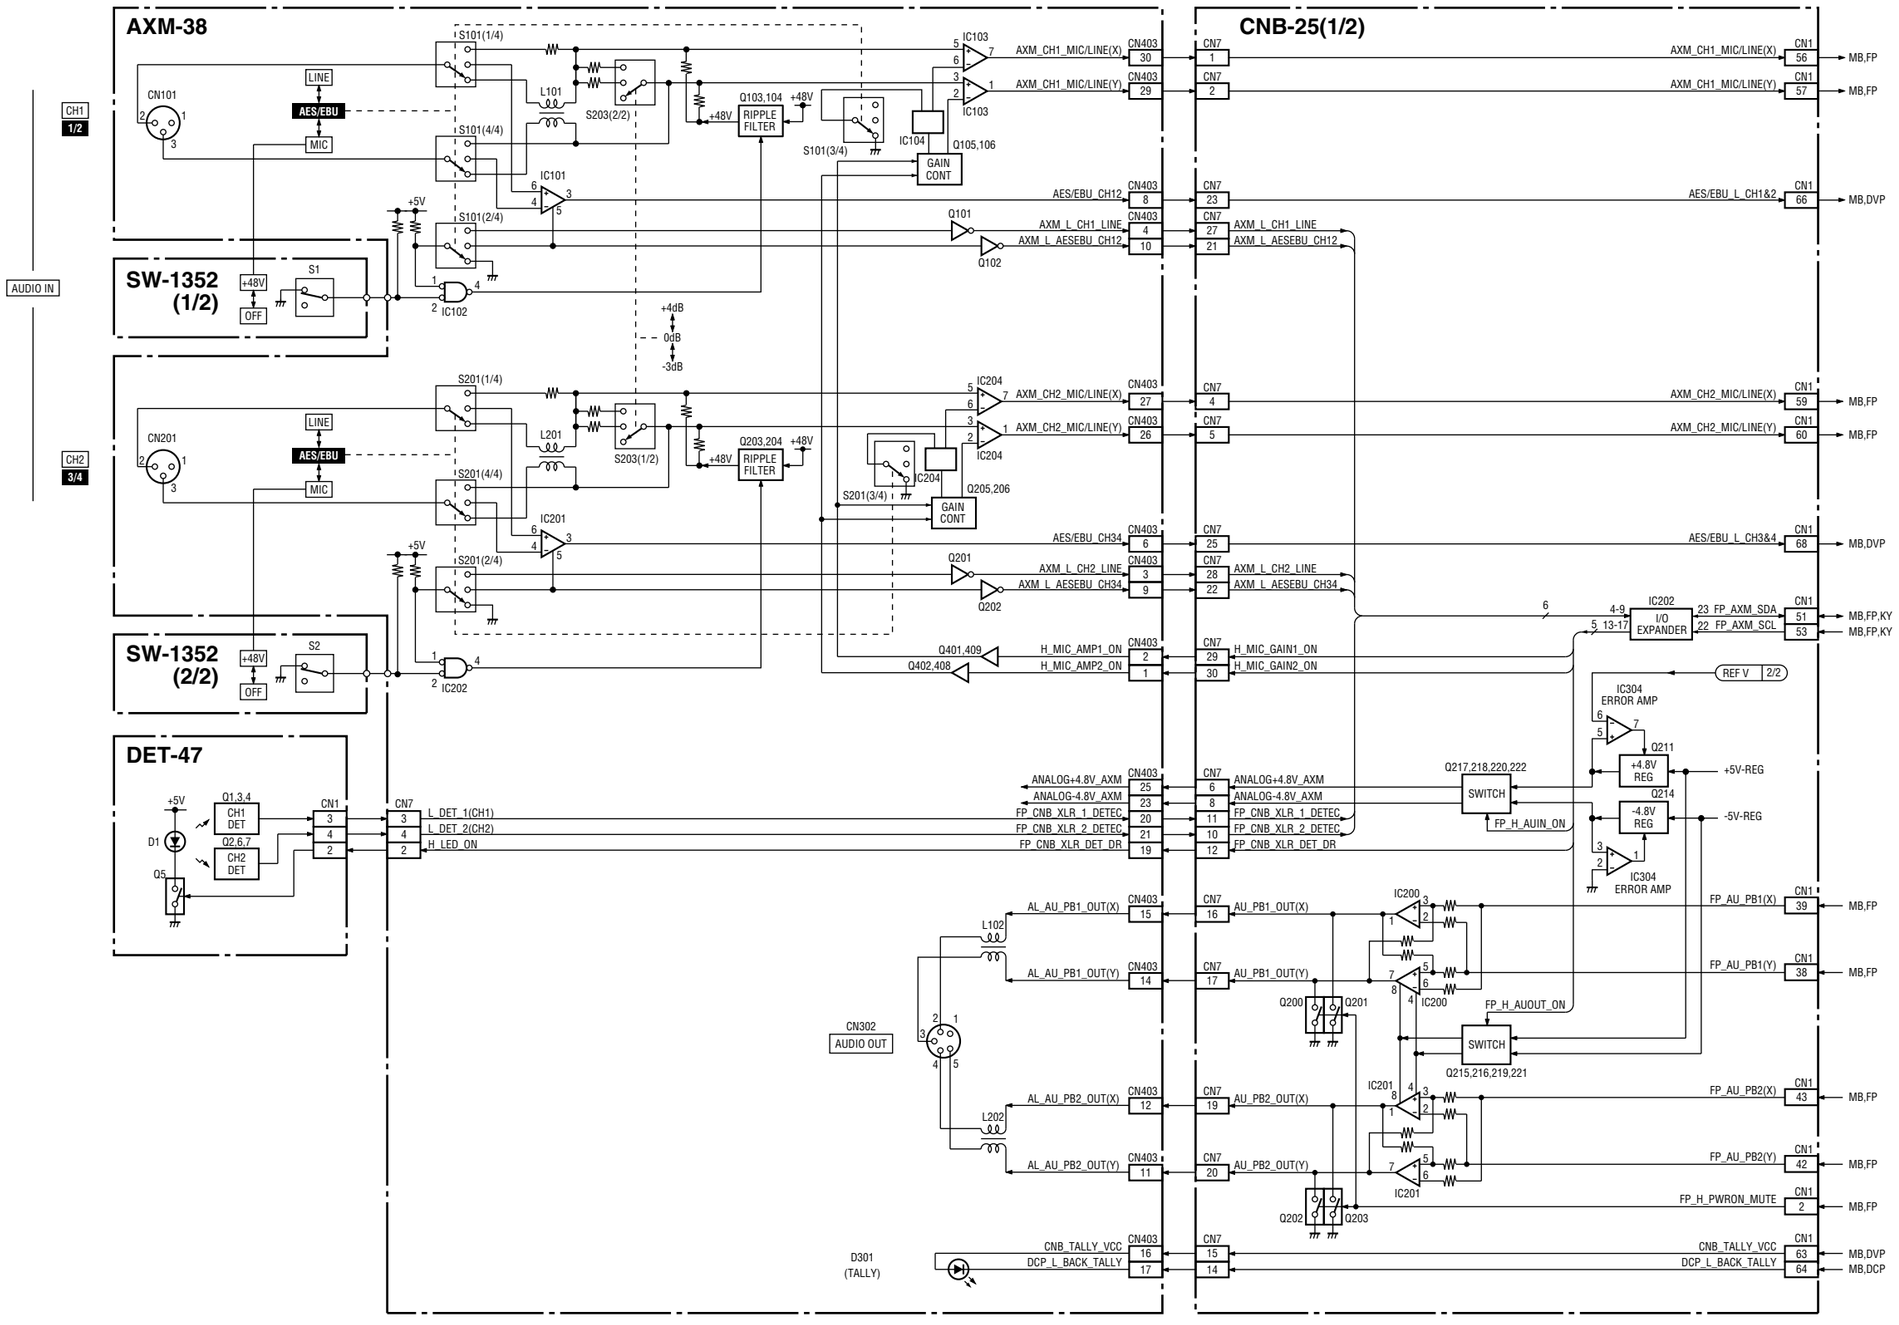

Audio Line IN/Out connector
AXM-38


Power source controller
CNB-25 (1/2)

XLR plug detector
DET-47

+48 V selector
SW-1352

2-8

CNB-25 (2/2), CN-3005, MB-1111 (1/2), PS-708, PS-731, SW-1249, SW-1426

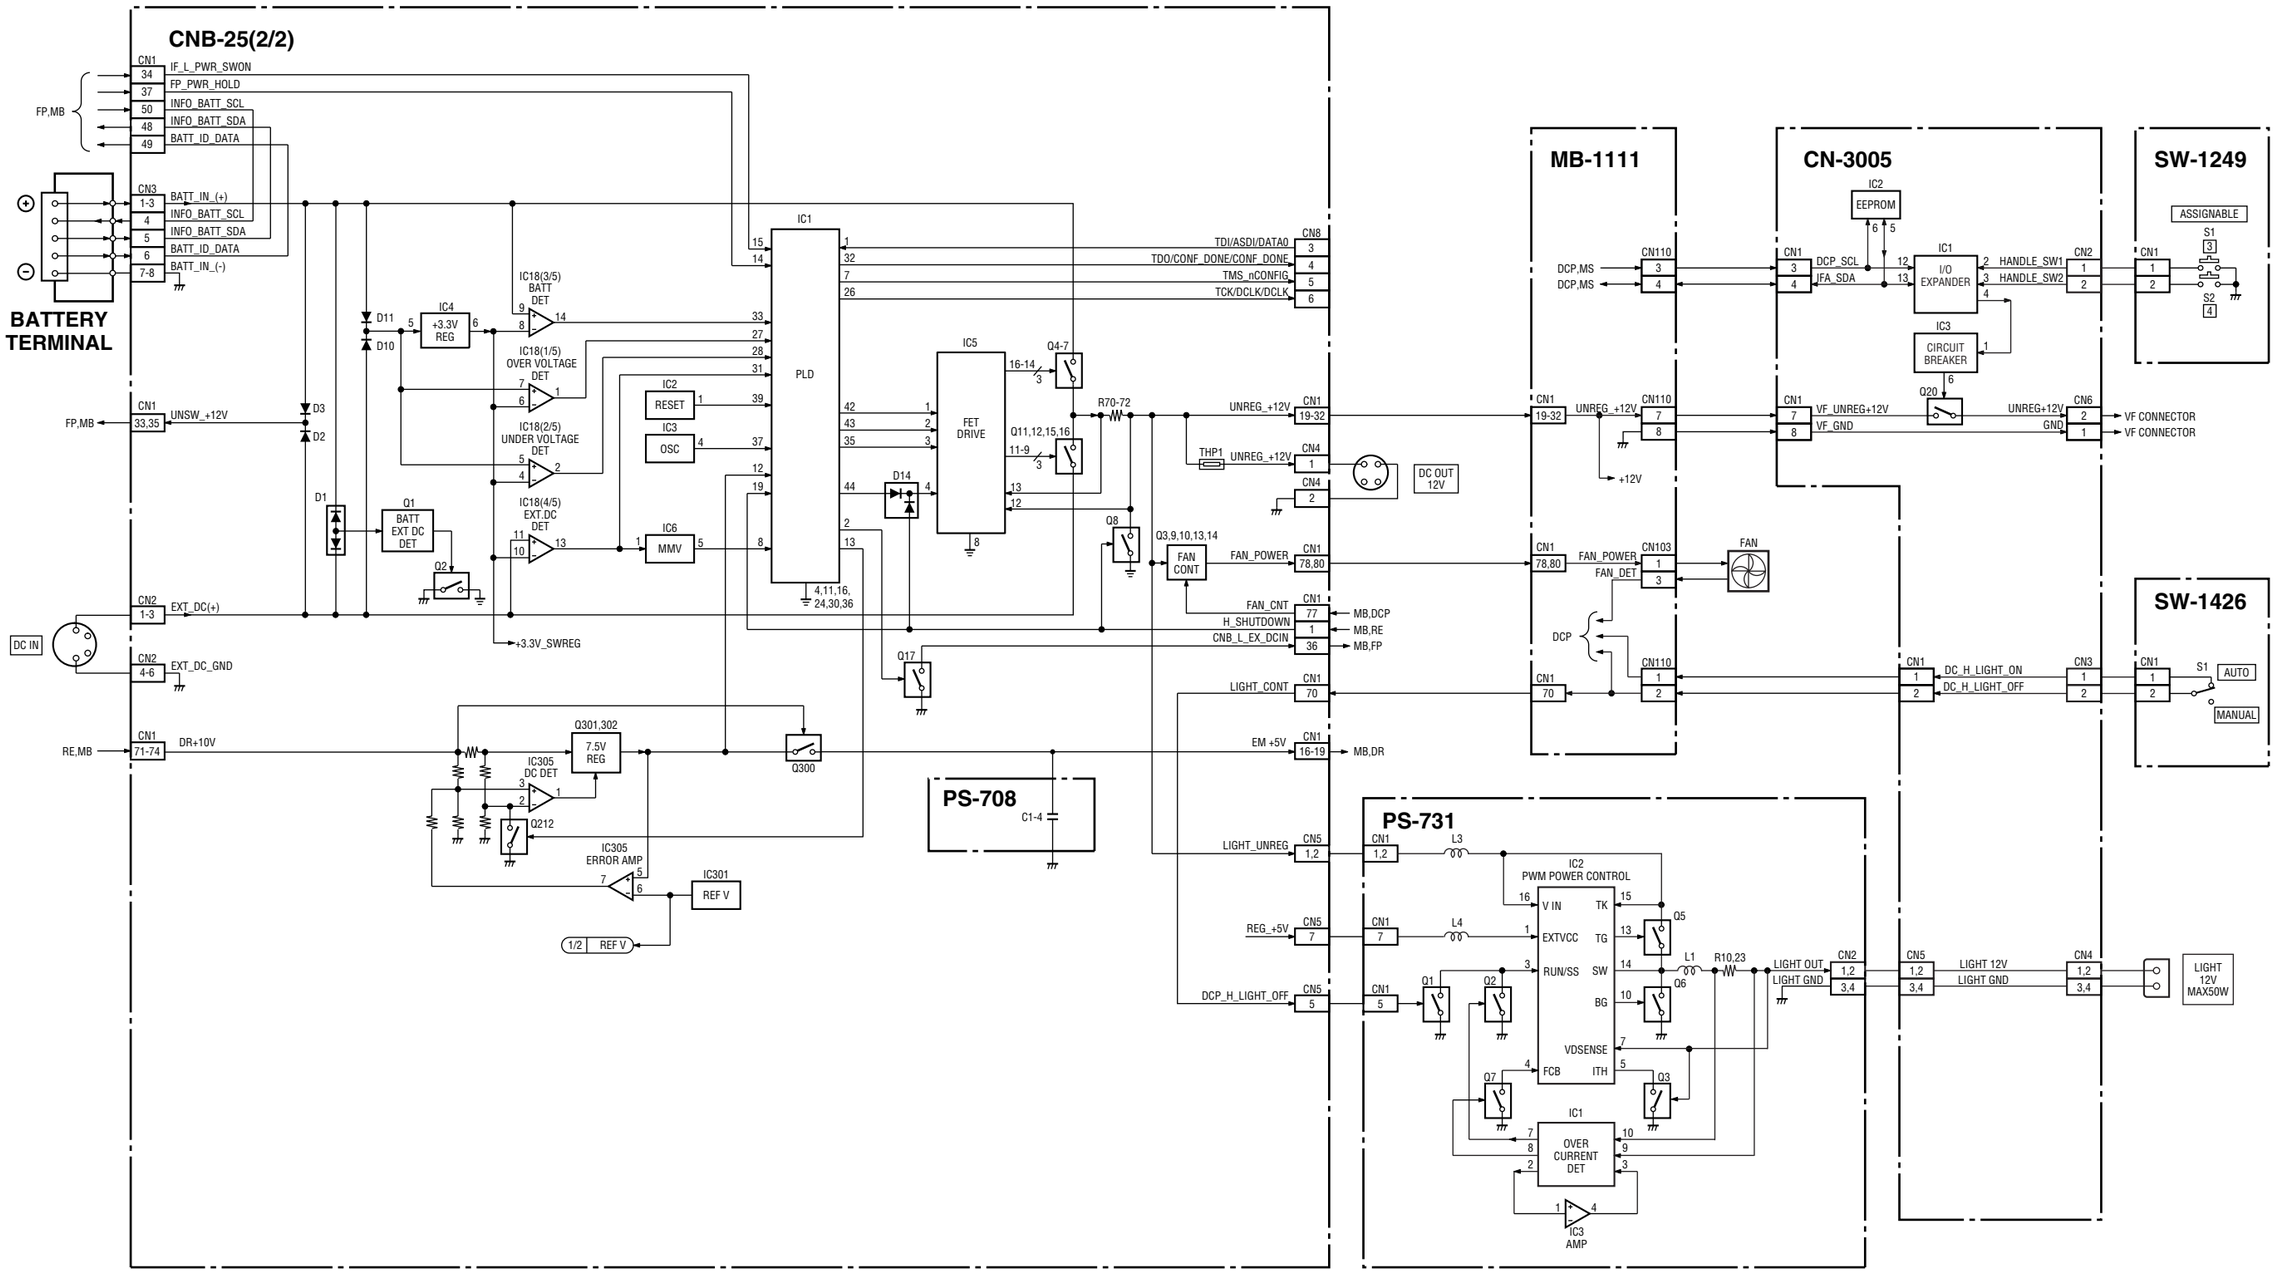

Power source controller
CNB-25 (2/2)

Double-Layer capacitor
PS-708

Assign switch
SW-1249

VF/Light connector
CN-3005


Power supply (Light)
PS-731

Light switch
SW-1426

MB-1111 (1/2)

2-9

CN-2947 (1/2), DR-617, PA-342A, PA-343A, PA-344, TG-260 (1/2)

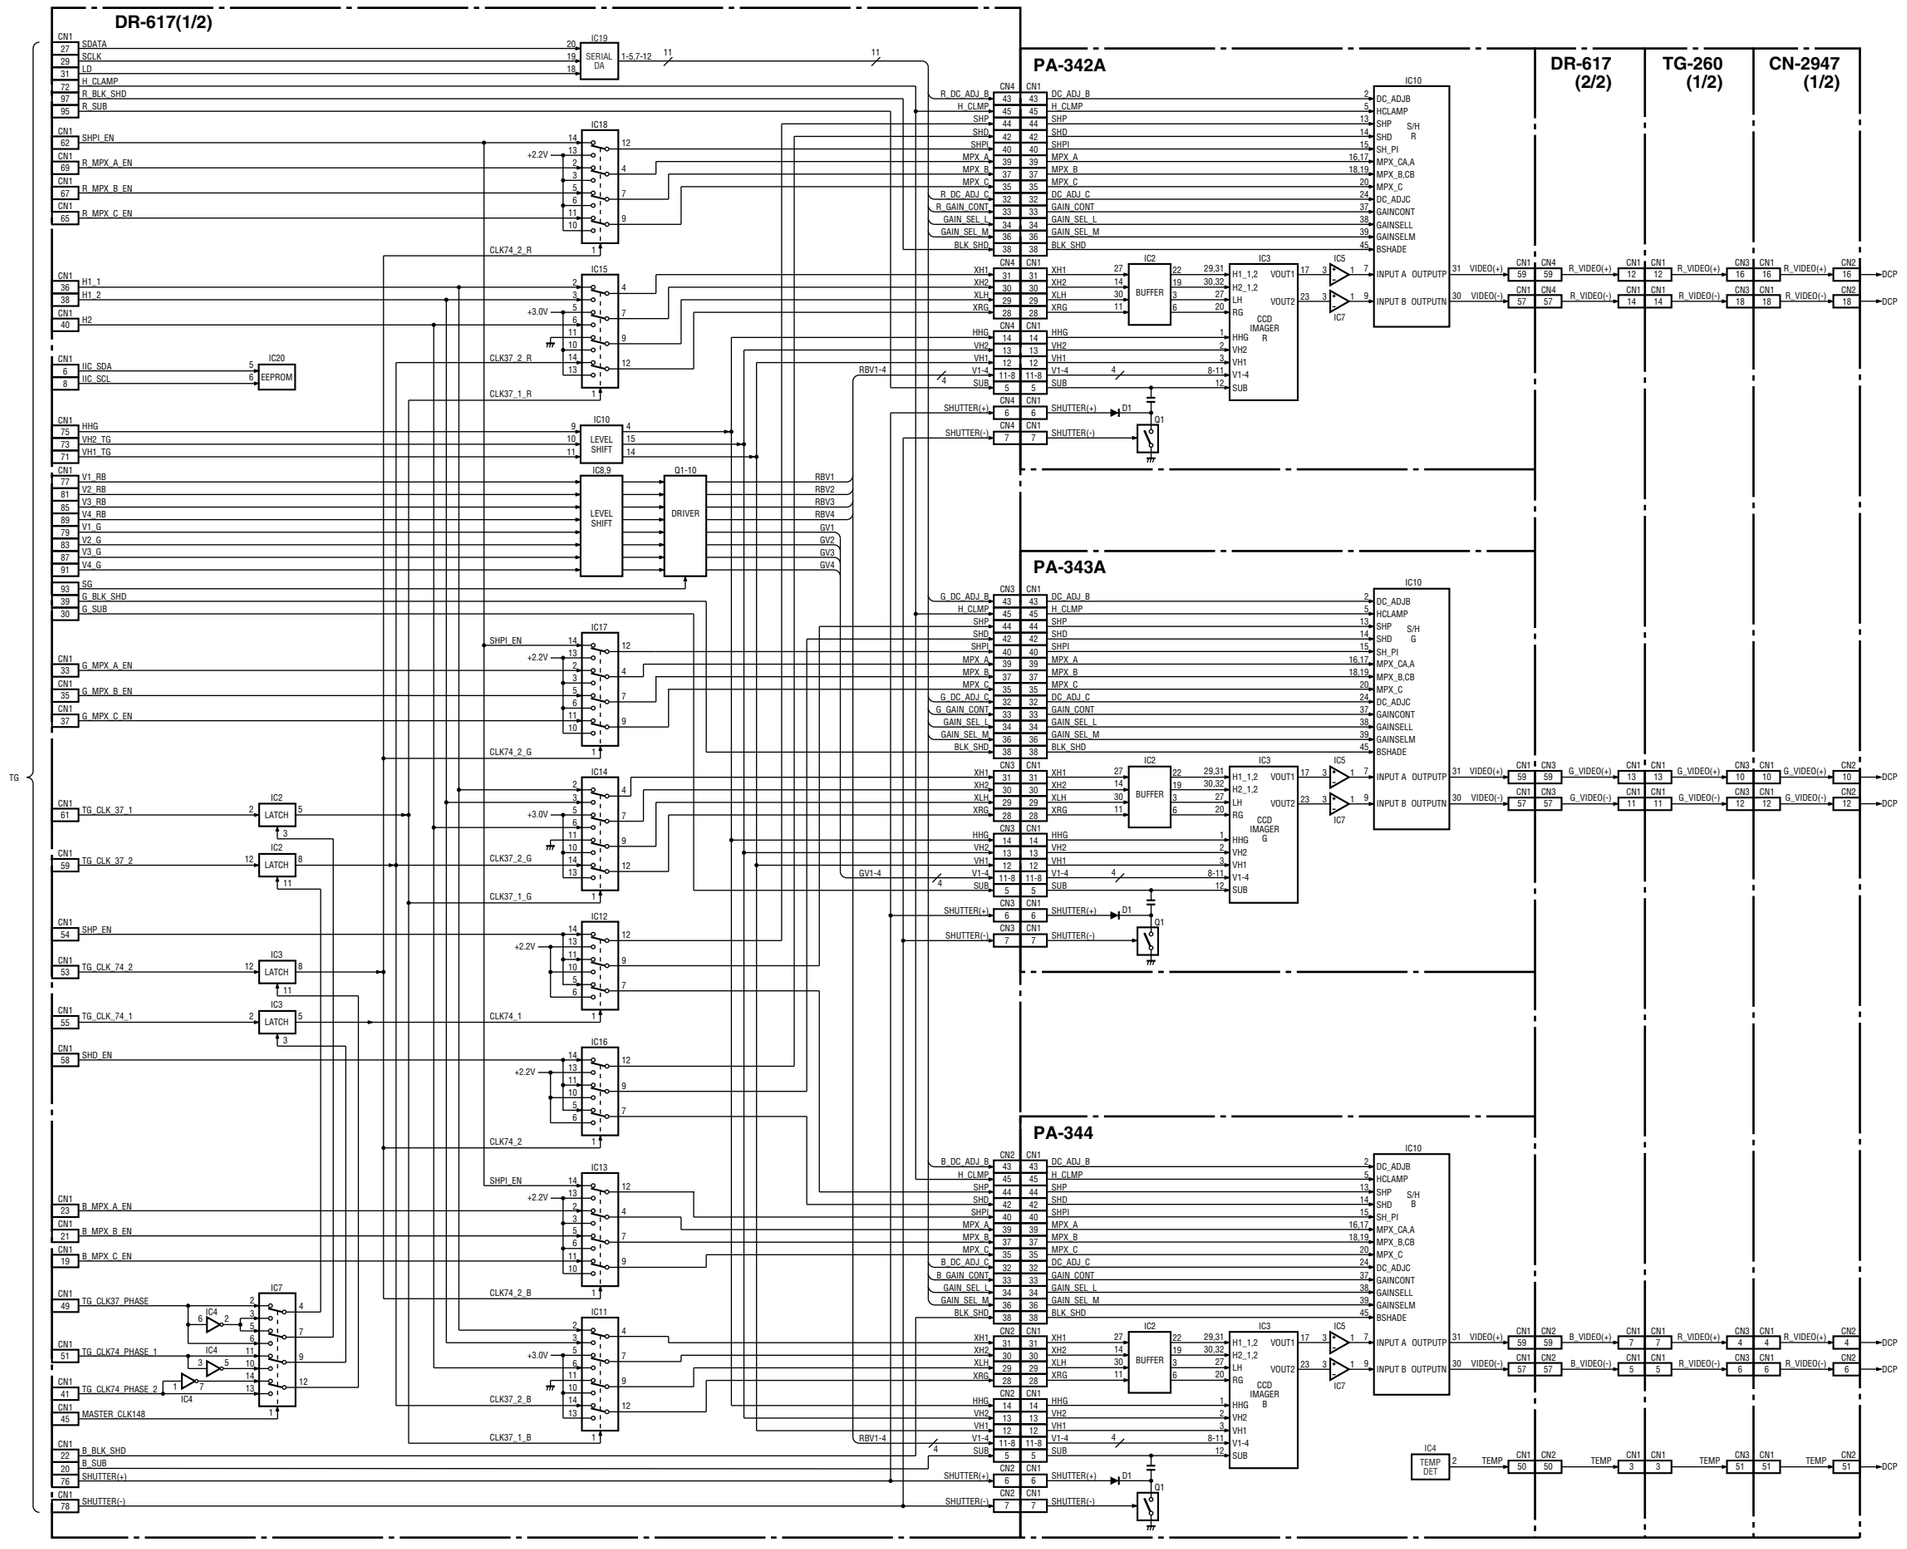

Connector
CN-2947 (1/2)


CCD driver
DR-617

CCD preamplifier
PA-342A

CCD preamplifier
PA-343A

CCD preamplifier
PA-344


Timing generator
TG-260 (1/2)

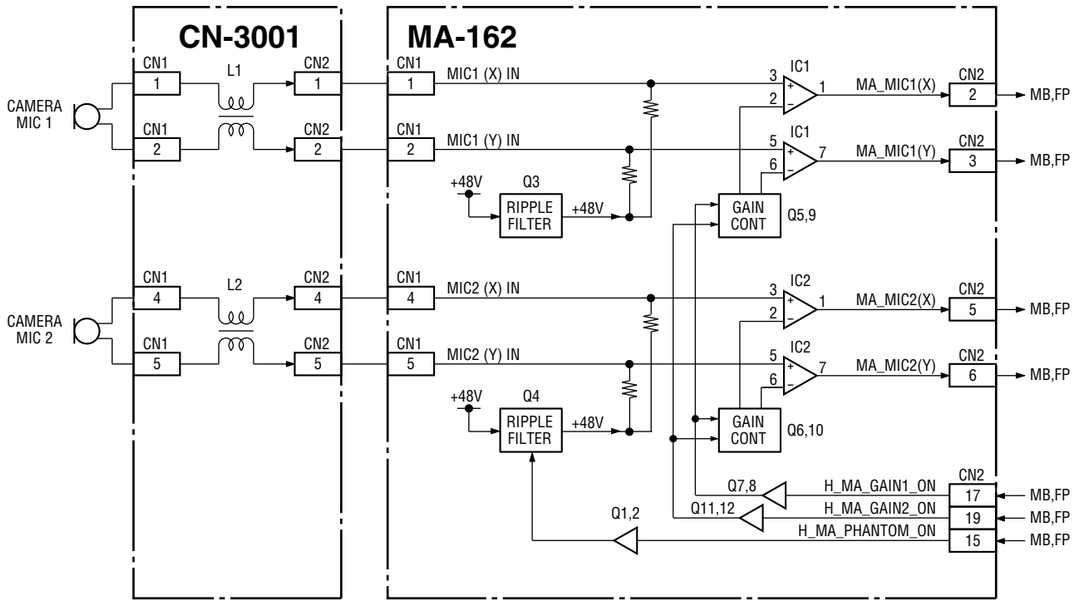

Front Mic connector
CN-3001

Mic Amp
MA-162

CN-2947 (2/2), SE-803, TG-260 (2/2)

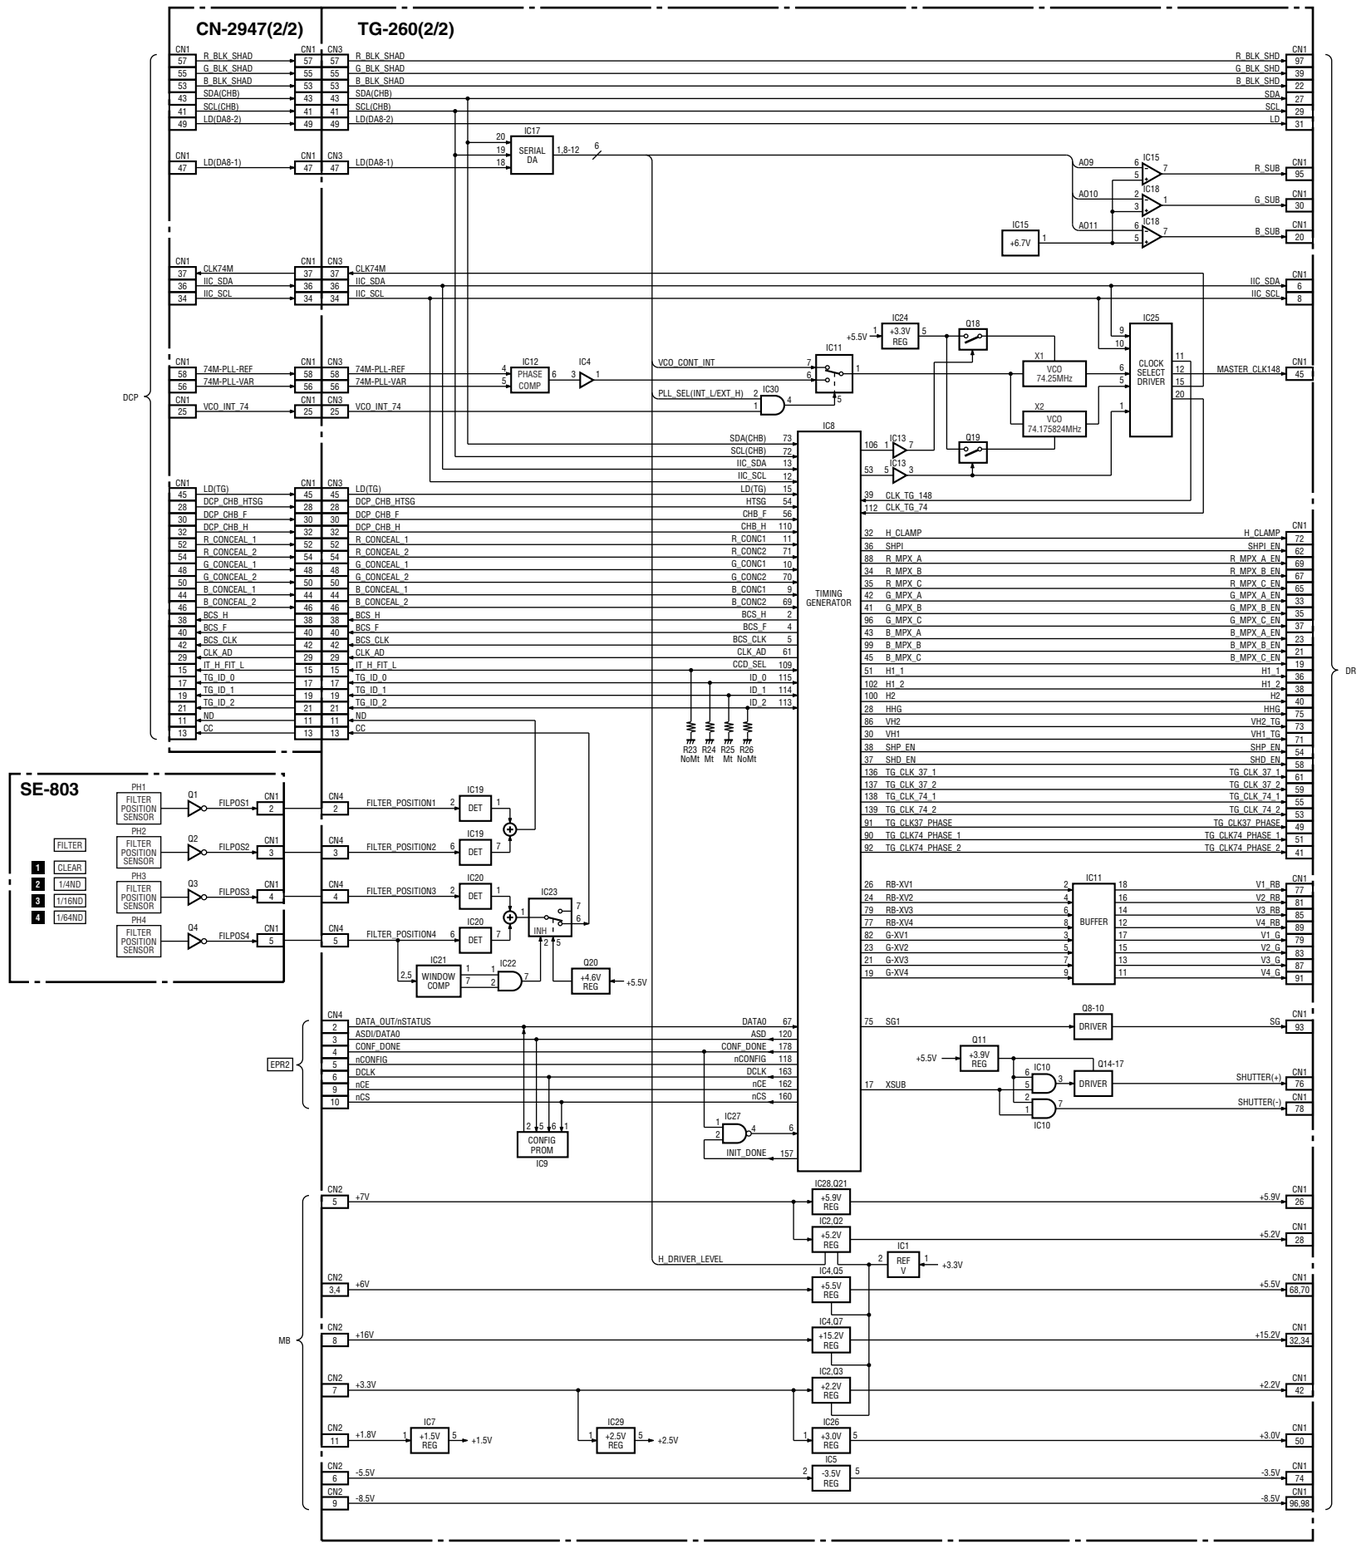


Connector
CN-2947 (2/2)


Filter position sensor
SE-803

Timing generator
TG-260 (2/2)

2-12

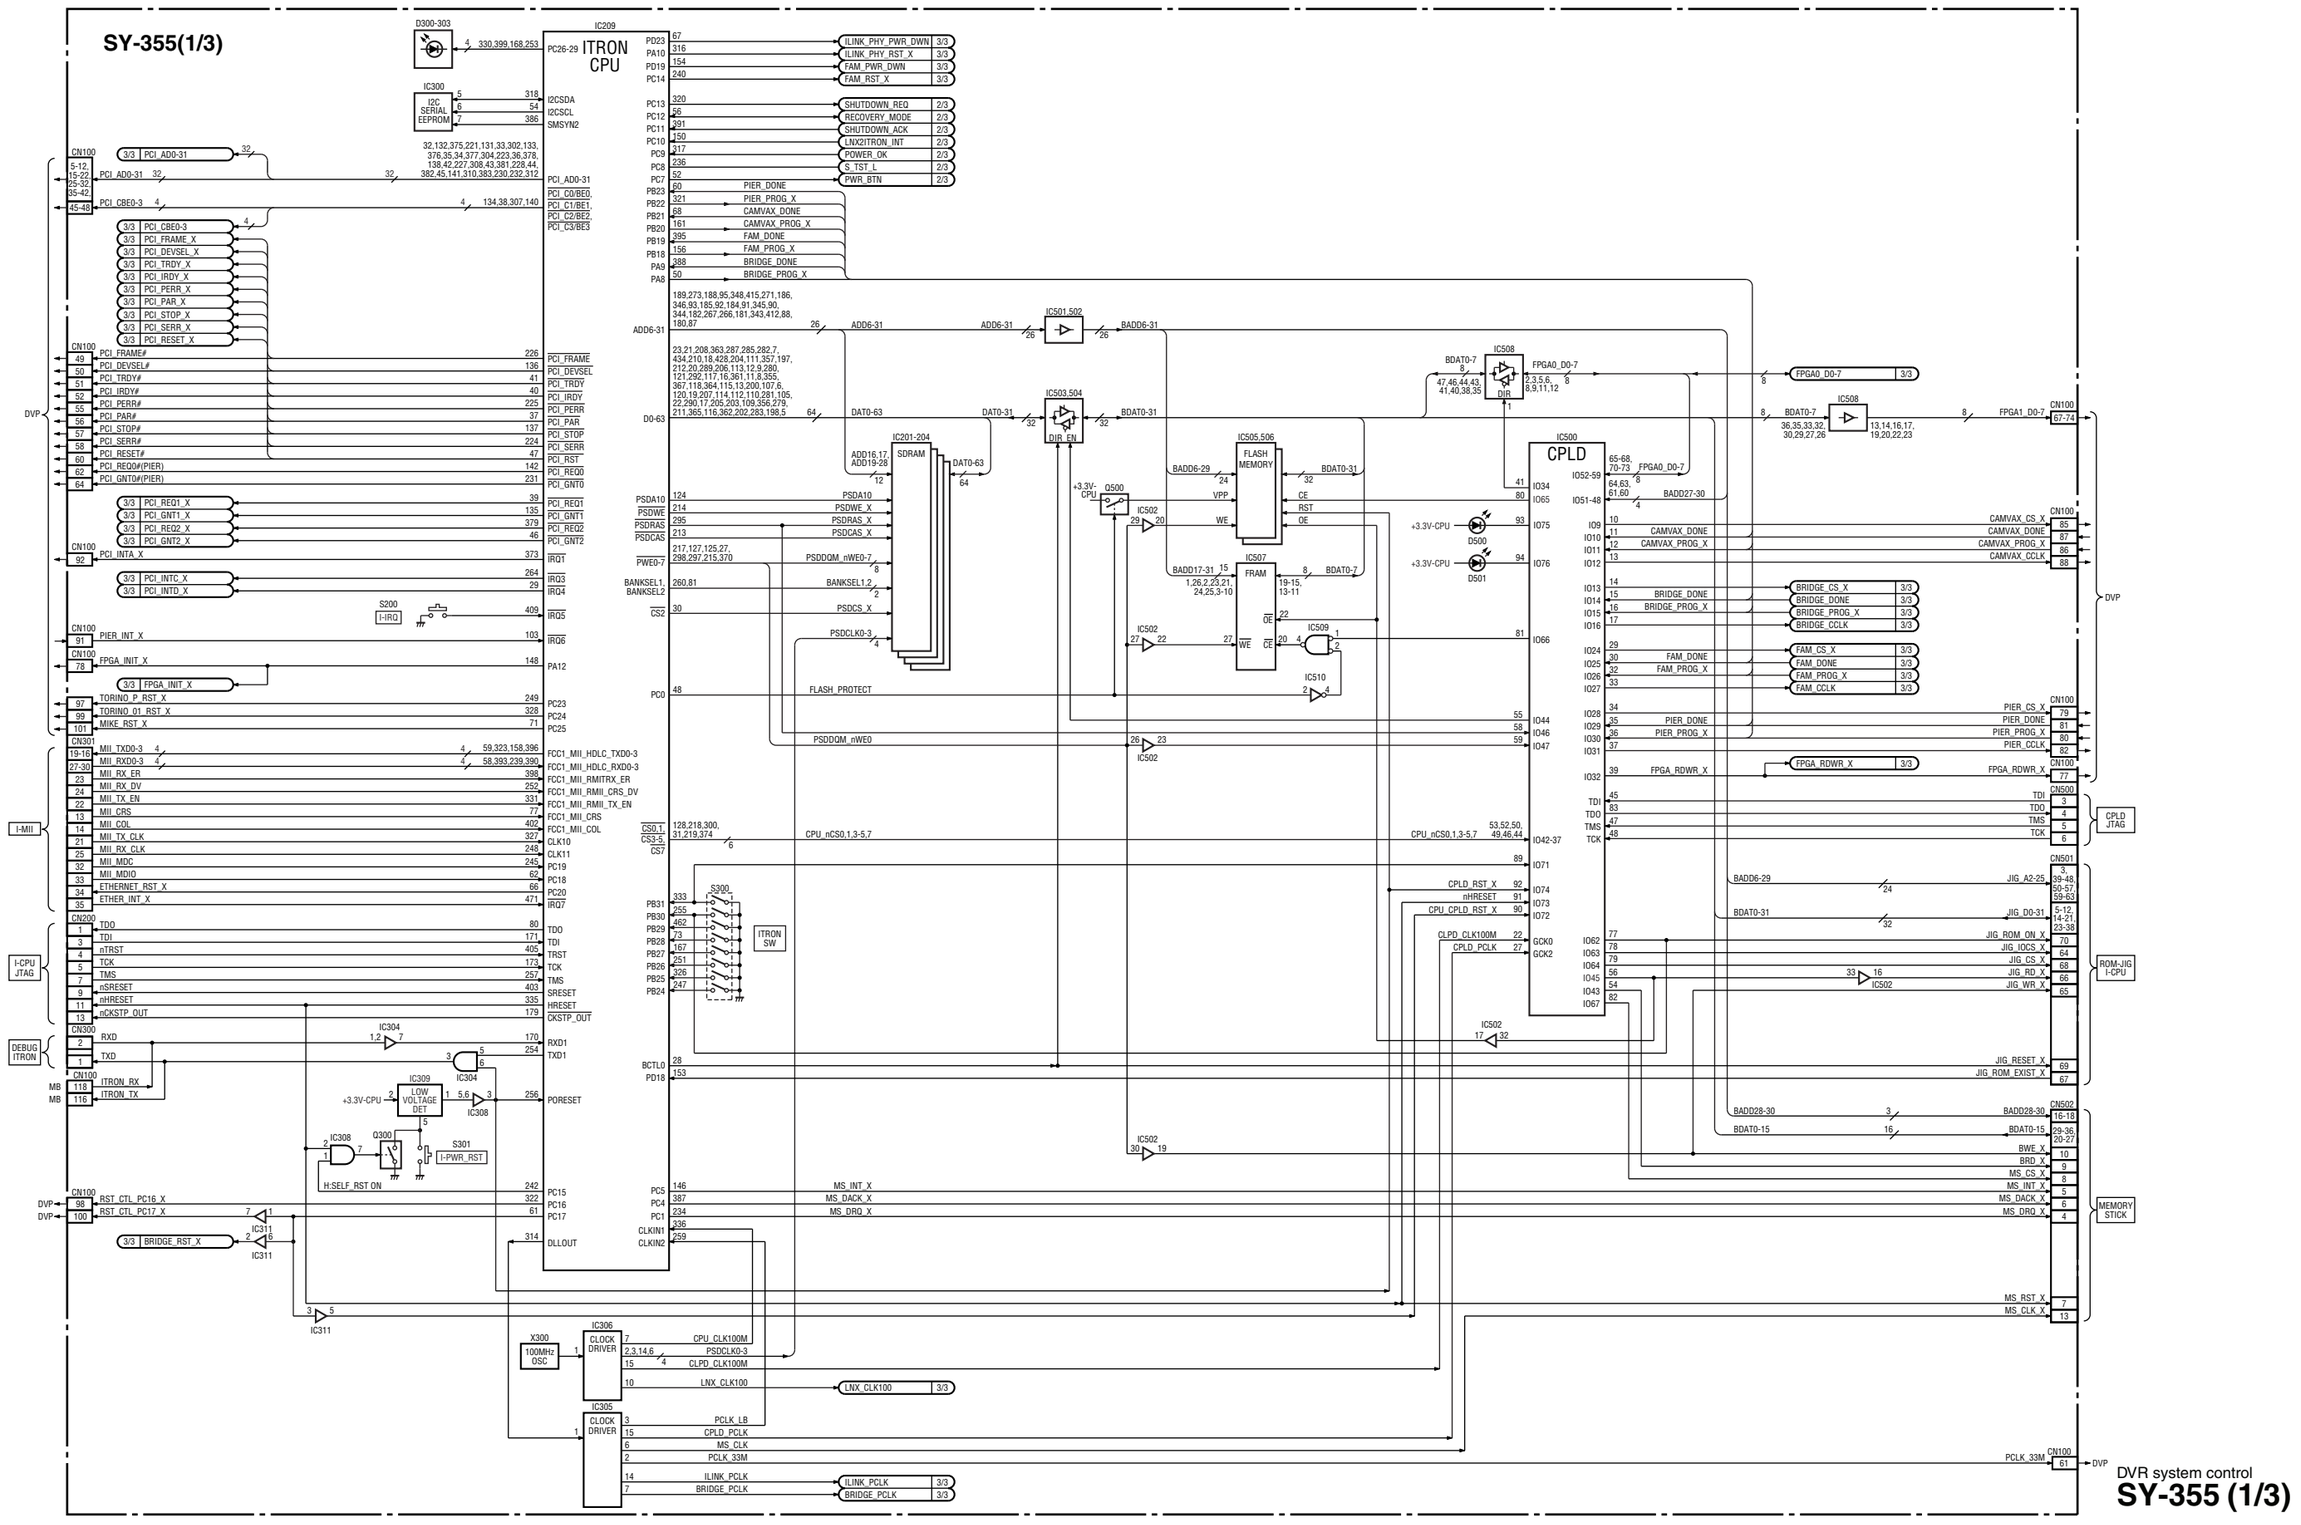
SY-355(1/3)
IC209
ITRON CPU
D300-303
IC300
I2C SERIAL EEPROM
I2CSDA
I2CSCL
SMSYN2
CN100
PCI_AD0-31
PCI_CBE0-3
PCI_FRAME_X
PCI_DEVSEL_X
PCI_TRDY_X
PCI_IRDY_X
PCI_PERR_X
PCI_PAR_X
PCI_STOP_X
PCI_SERR_X
PCI_RESET_X
PCI_FRAME#
PCI_DEVSEL#
PCI_TRDY#
PCI_IRDY#
PCI_PERR#
PCI_PAR#
PCI_STOP#
PCI_SERR#
PCI_RESET#
PCI_REQ0#(PIER)
PCI_GNT0#(PIER)
PCI_REQ1_X
PCI_GNT1_X
PCI_REQ2_X
PCI_GNT2_X
PCI_INTA_X
PCI_INTC_X
PCI_INTD_X
S200
I-IRQ
PIER_INT_X
FPGA_INIT_X
TORINO_P_RST_X
TORINO_01_RST_X
MIKE_RST_X
CN301
MII_TXD0-3
MII_RXD0-3
MII_RX_ER
MII_RX_DV
MII_TX_EN
MII_CRS
MII_COL
MII_TX_CLK
MII_RX_CLK
MII_MDC
MII_MDIO
ETHERNET_RST_X
ETHER_INT_X
CN200
TDO
TDI
nTRST
TCK
TMS
nSRESET
nHRESET
nCKSTP_OUT
CN300
RXD
TXD
CN100
ITRON_RX
ITRON_TX
IC304
IC309
LOW VOLTAGE DET
IC308
Q300
S301
I-PWR_RST
H:SELF_RST ON
RST_CTL_PC16_X
RST_CTL_PC17_X
BRIDGE_RST_X
IC311
X300
100MHz OSC
IC306
CLOCK DRIVER
IC305
PDW-F800/V2 (J,E)
2-13
2-13
DVR system control
SY-355 (1/3)


CN-2946, SY-355 (2/3)

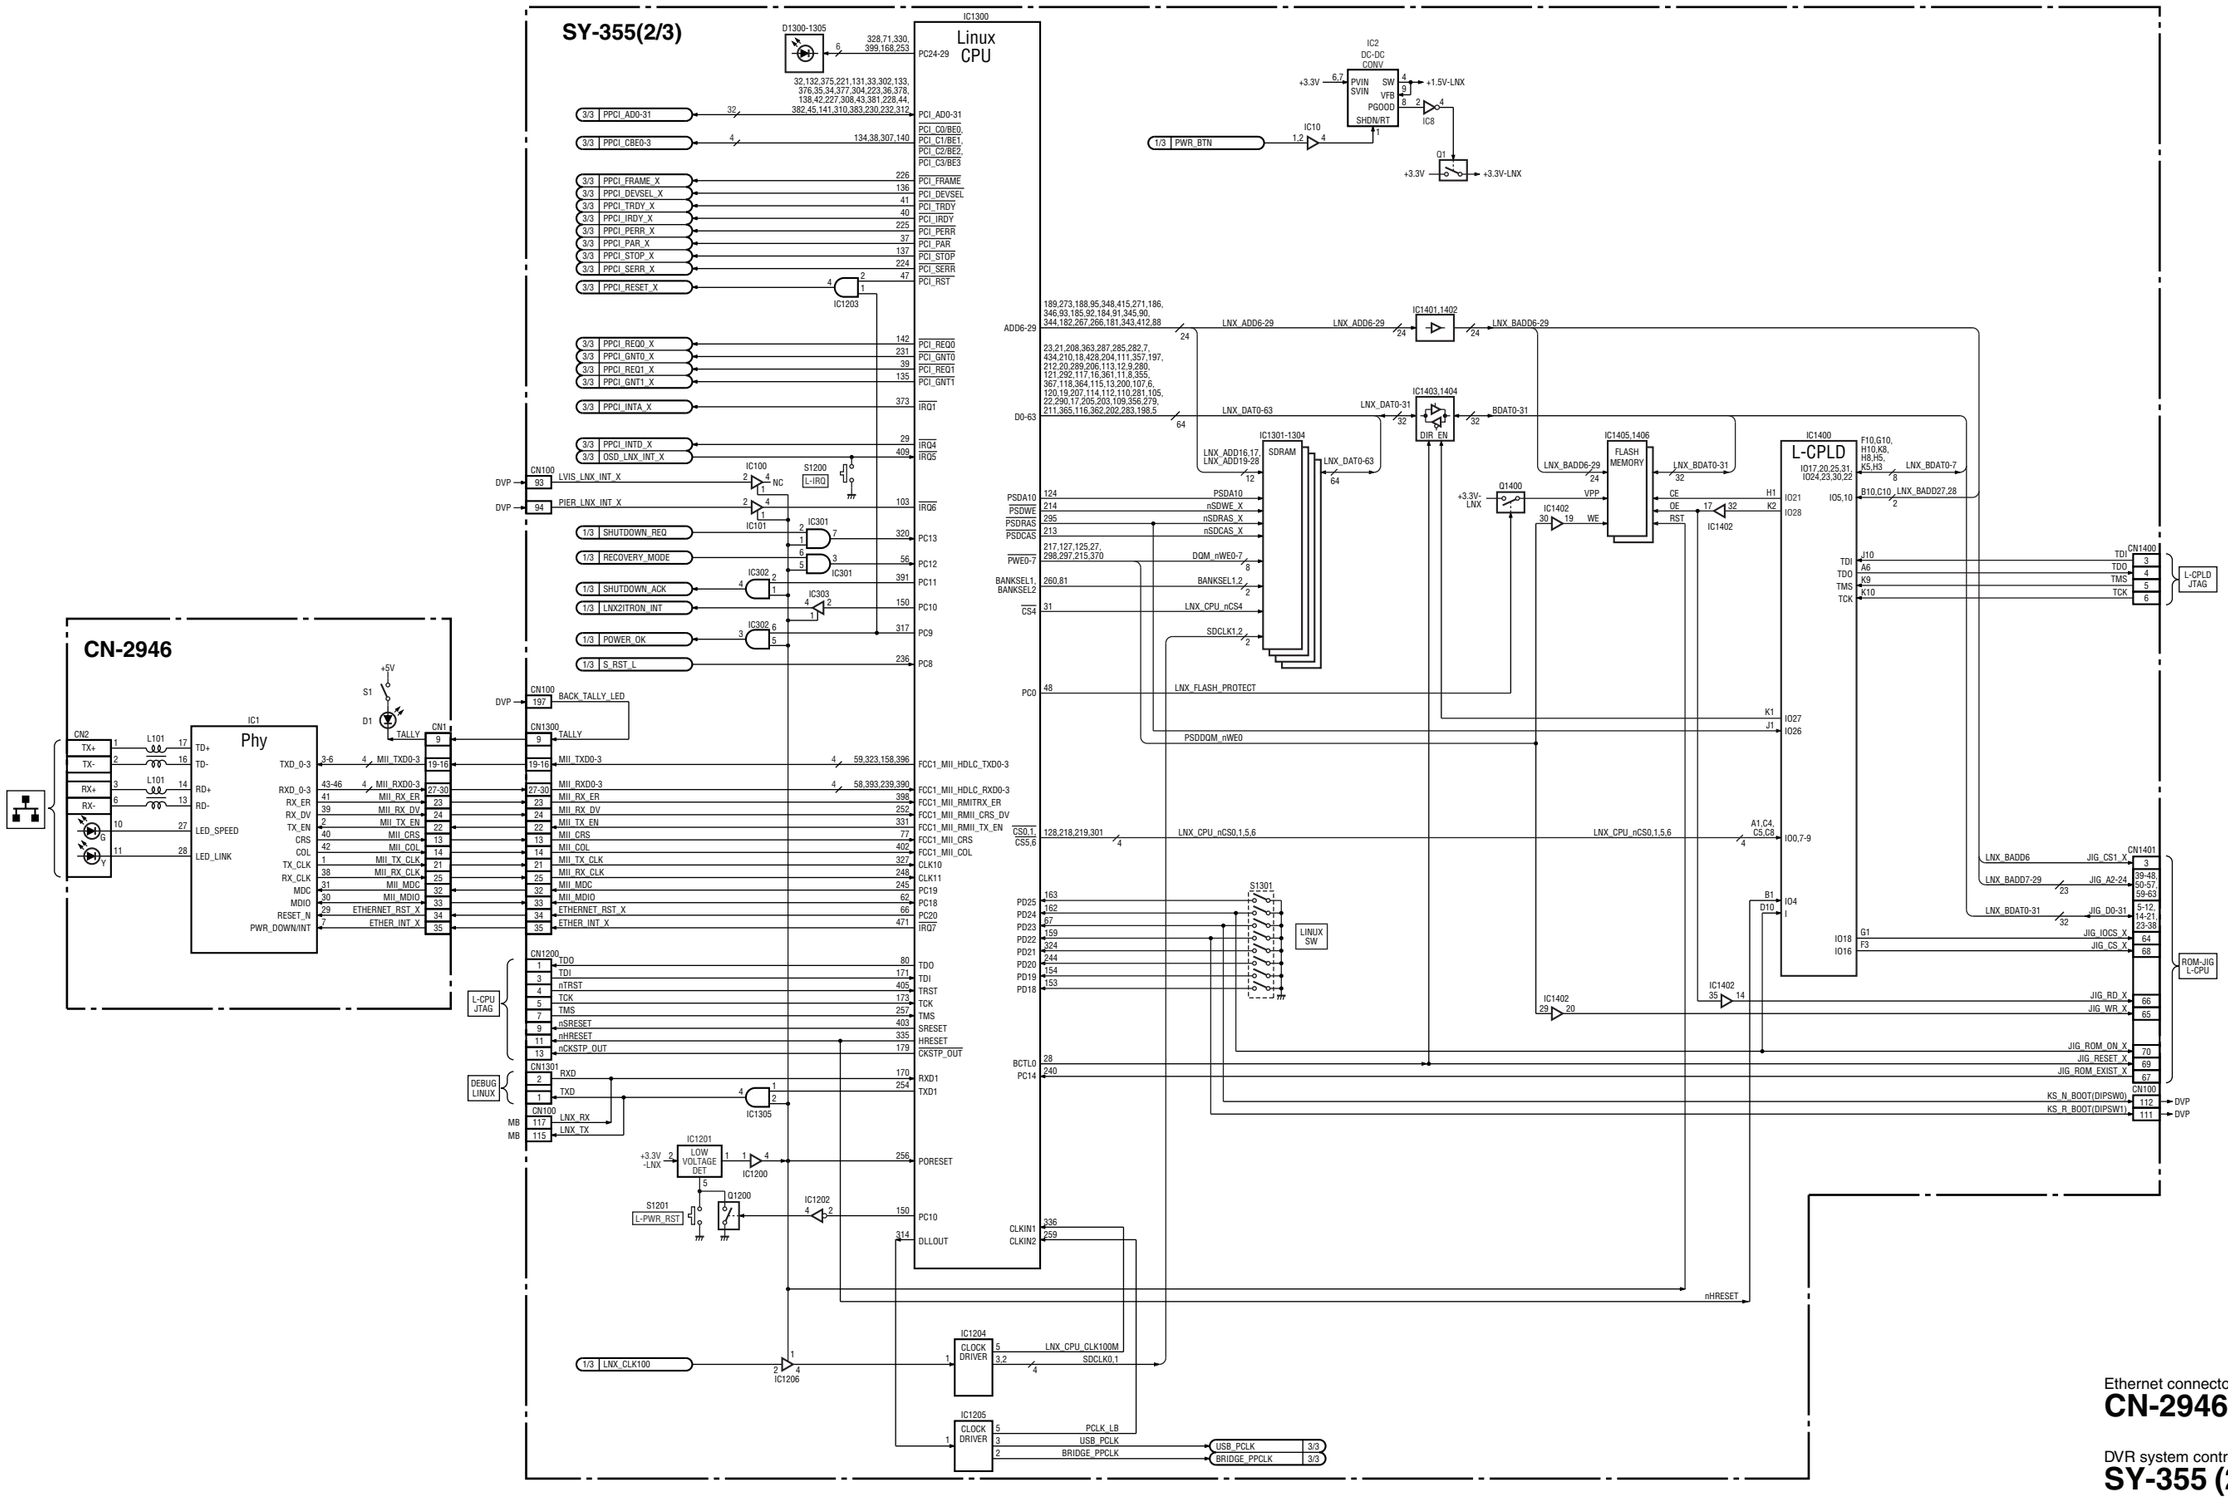

2-14

CN-2948, CN-3026, SY-355 (3/3)


SY-355(3/3)

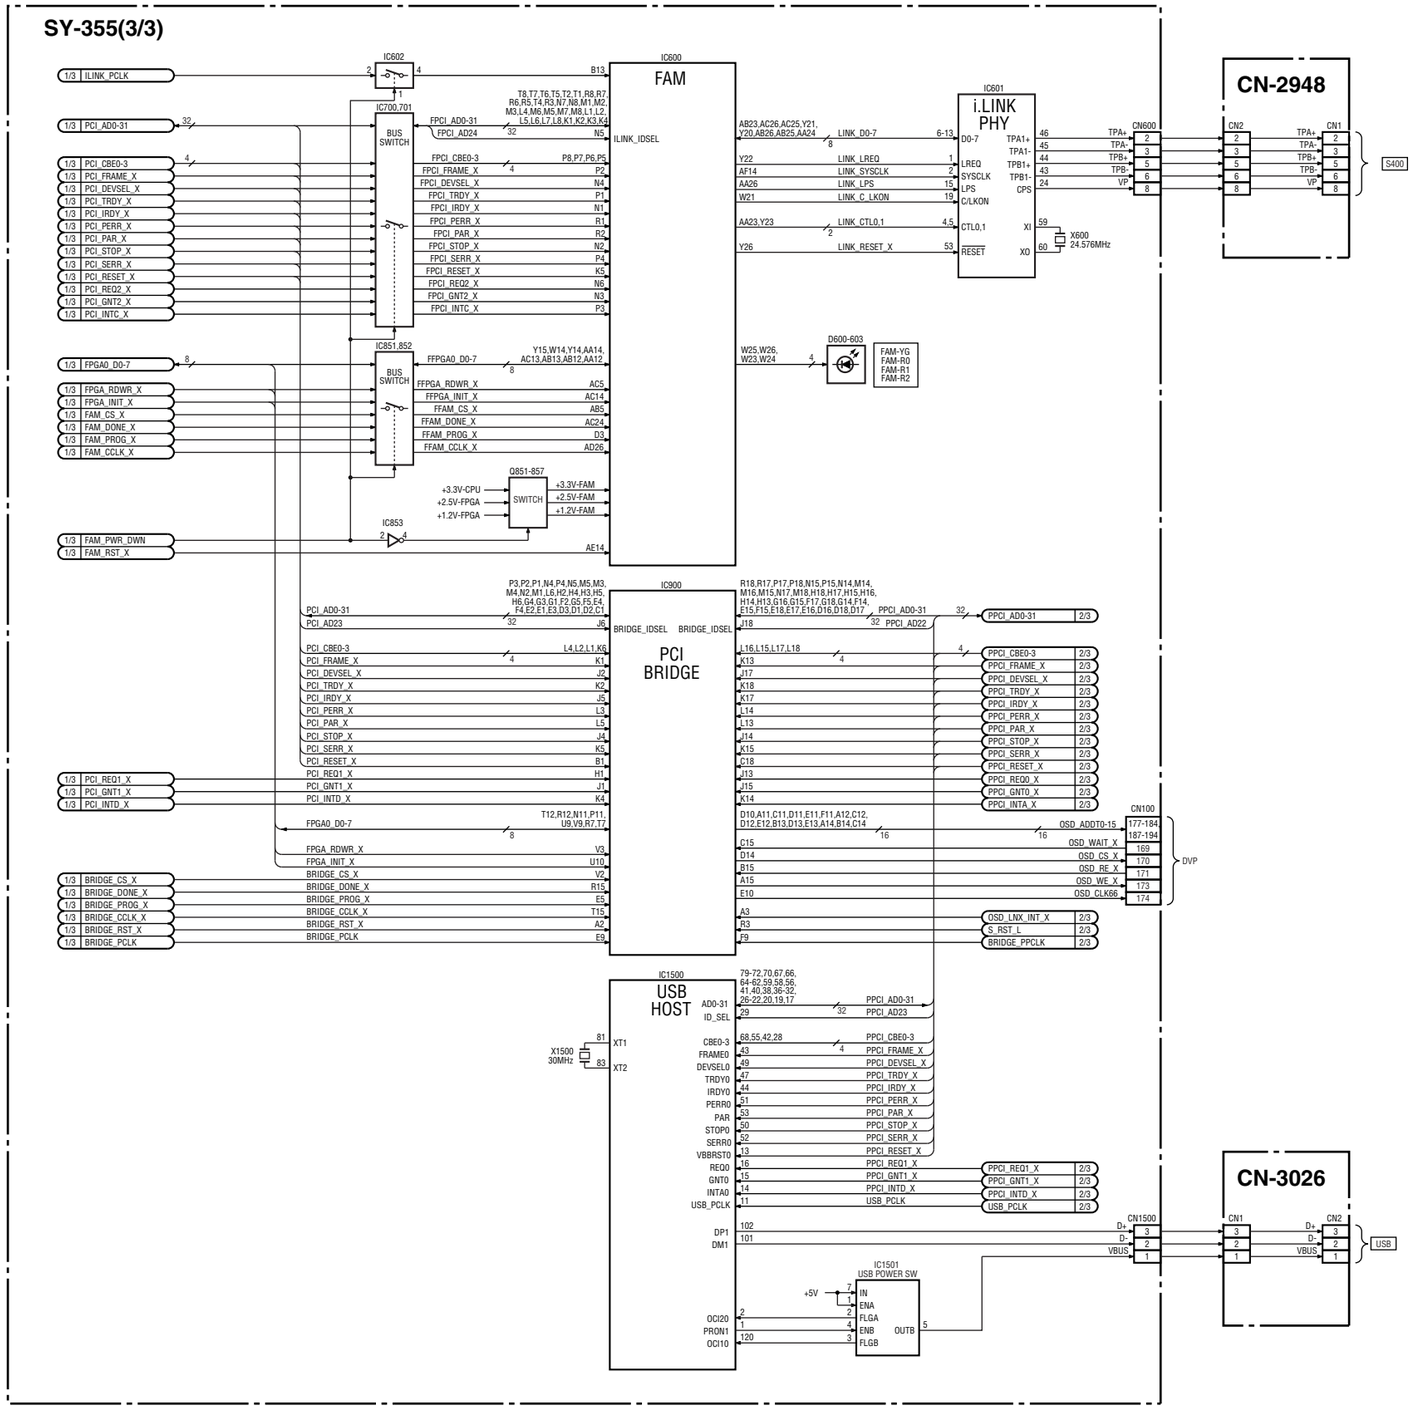

IEEE1394 connector
CN-2948

USB connector
CN-3026


DVR system control
SY-355 (3/3)

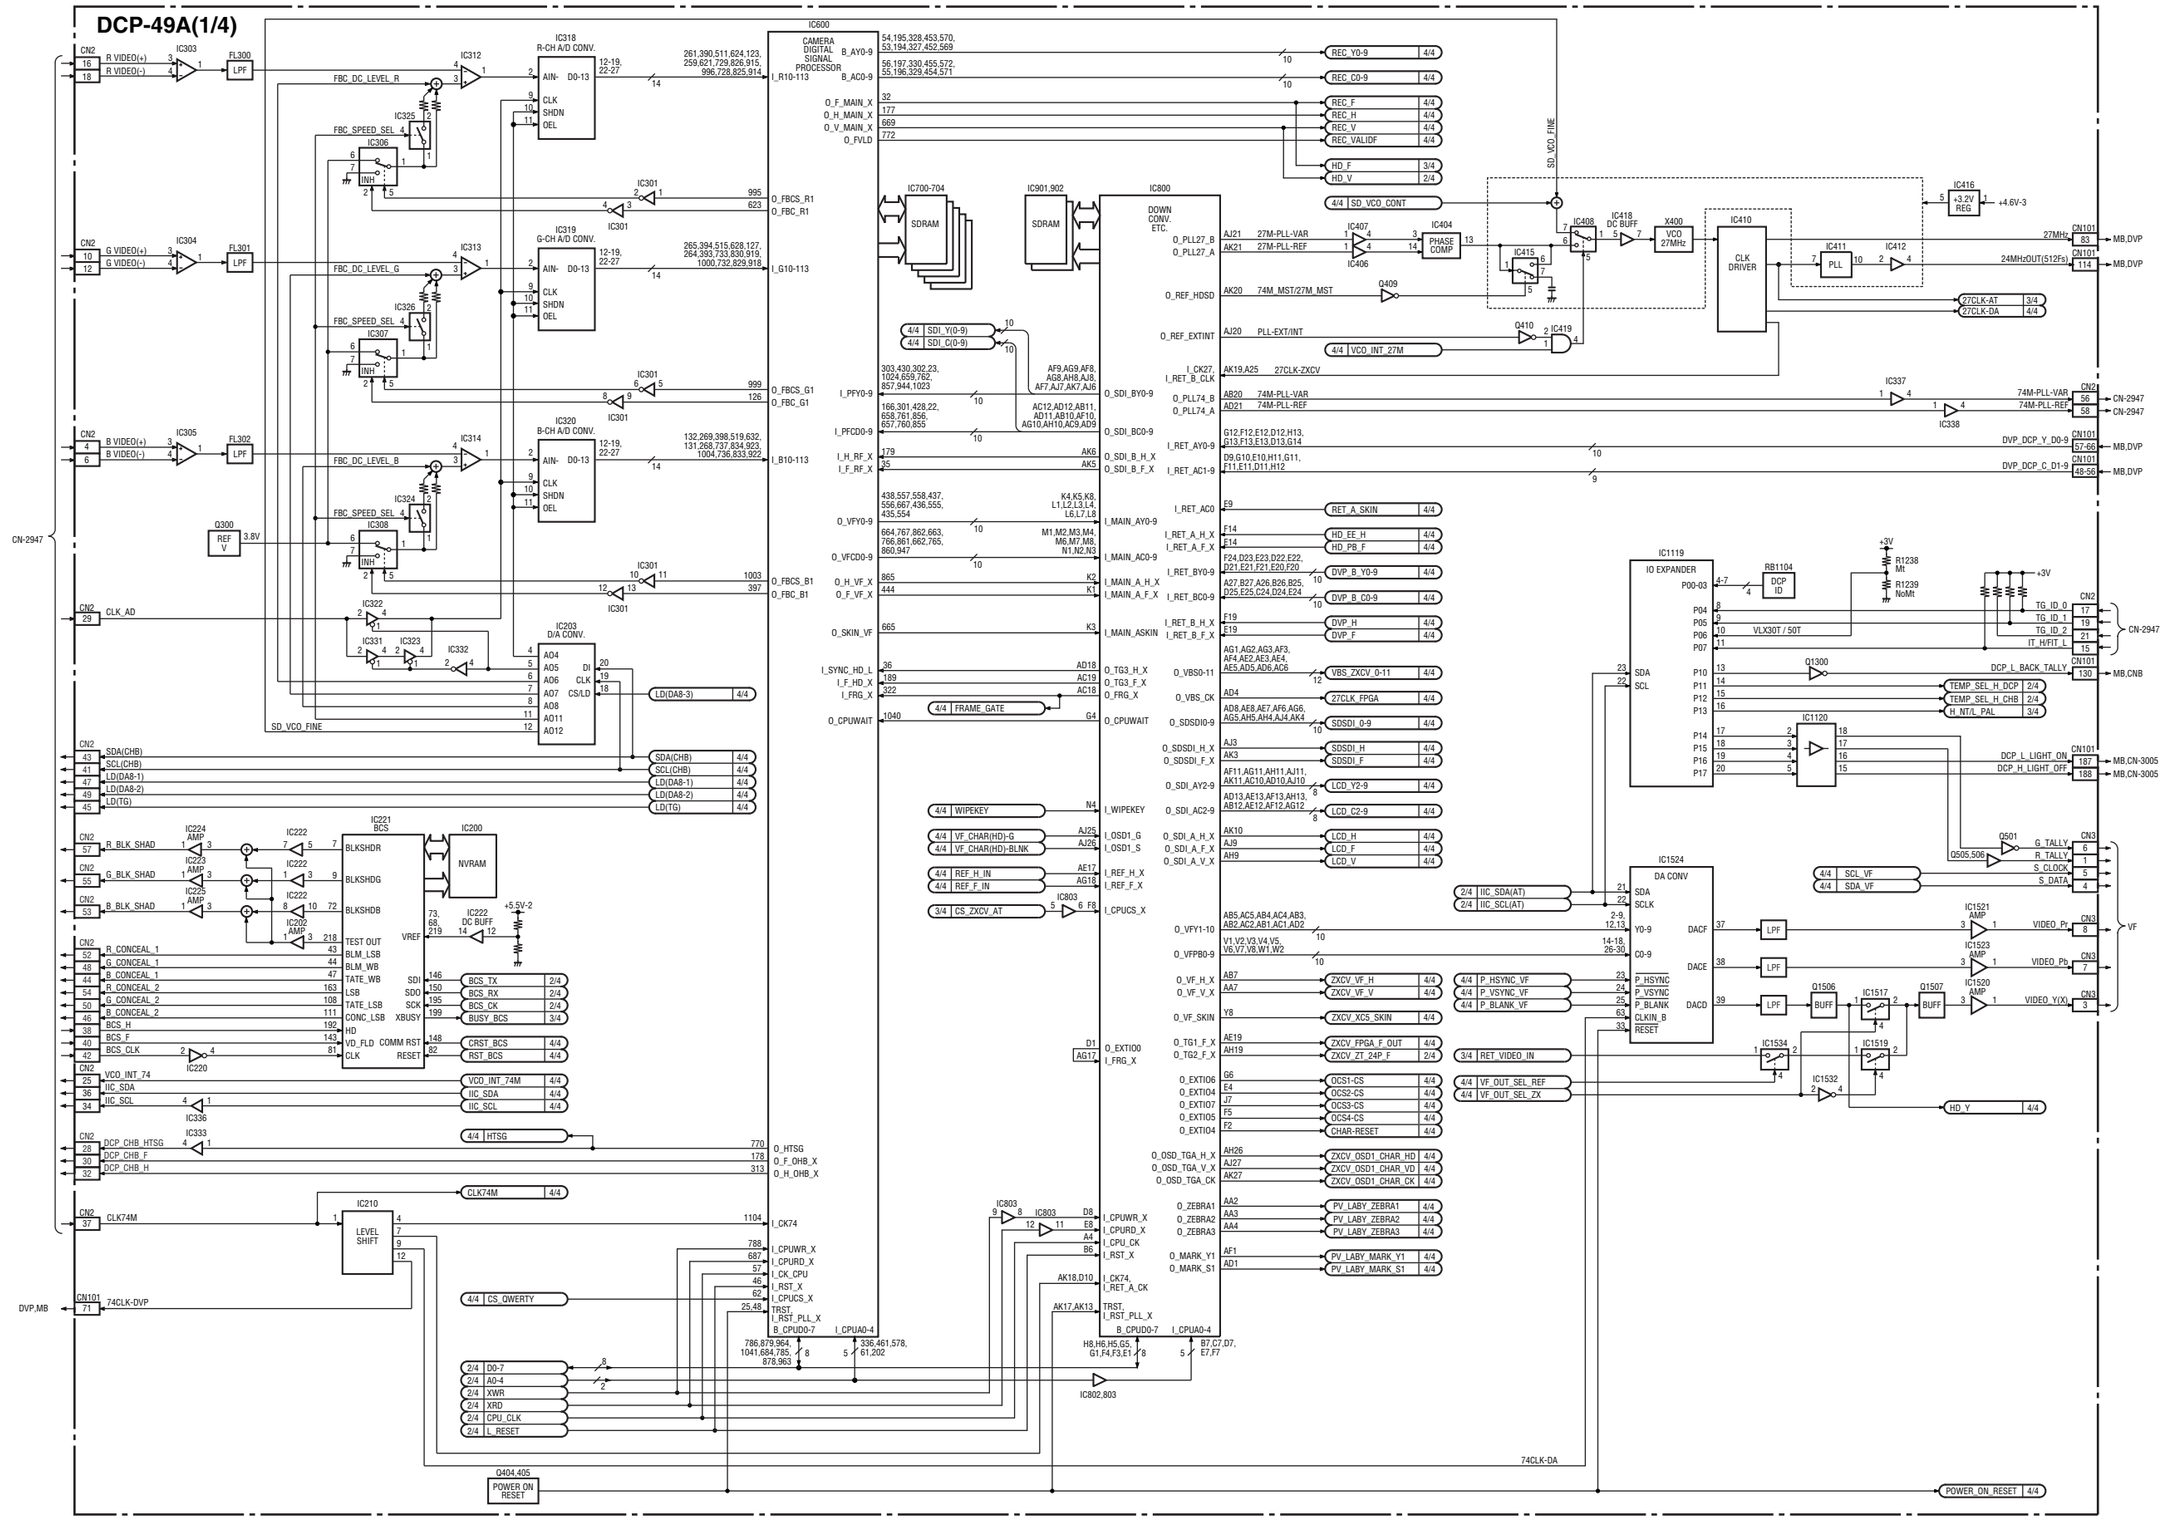


Camera video signal processor

DCP-49A (1/4)

AT-177 (1/2), DCP-49A (2/4), MS-86 (1/2)

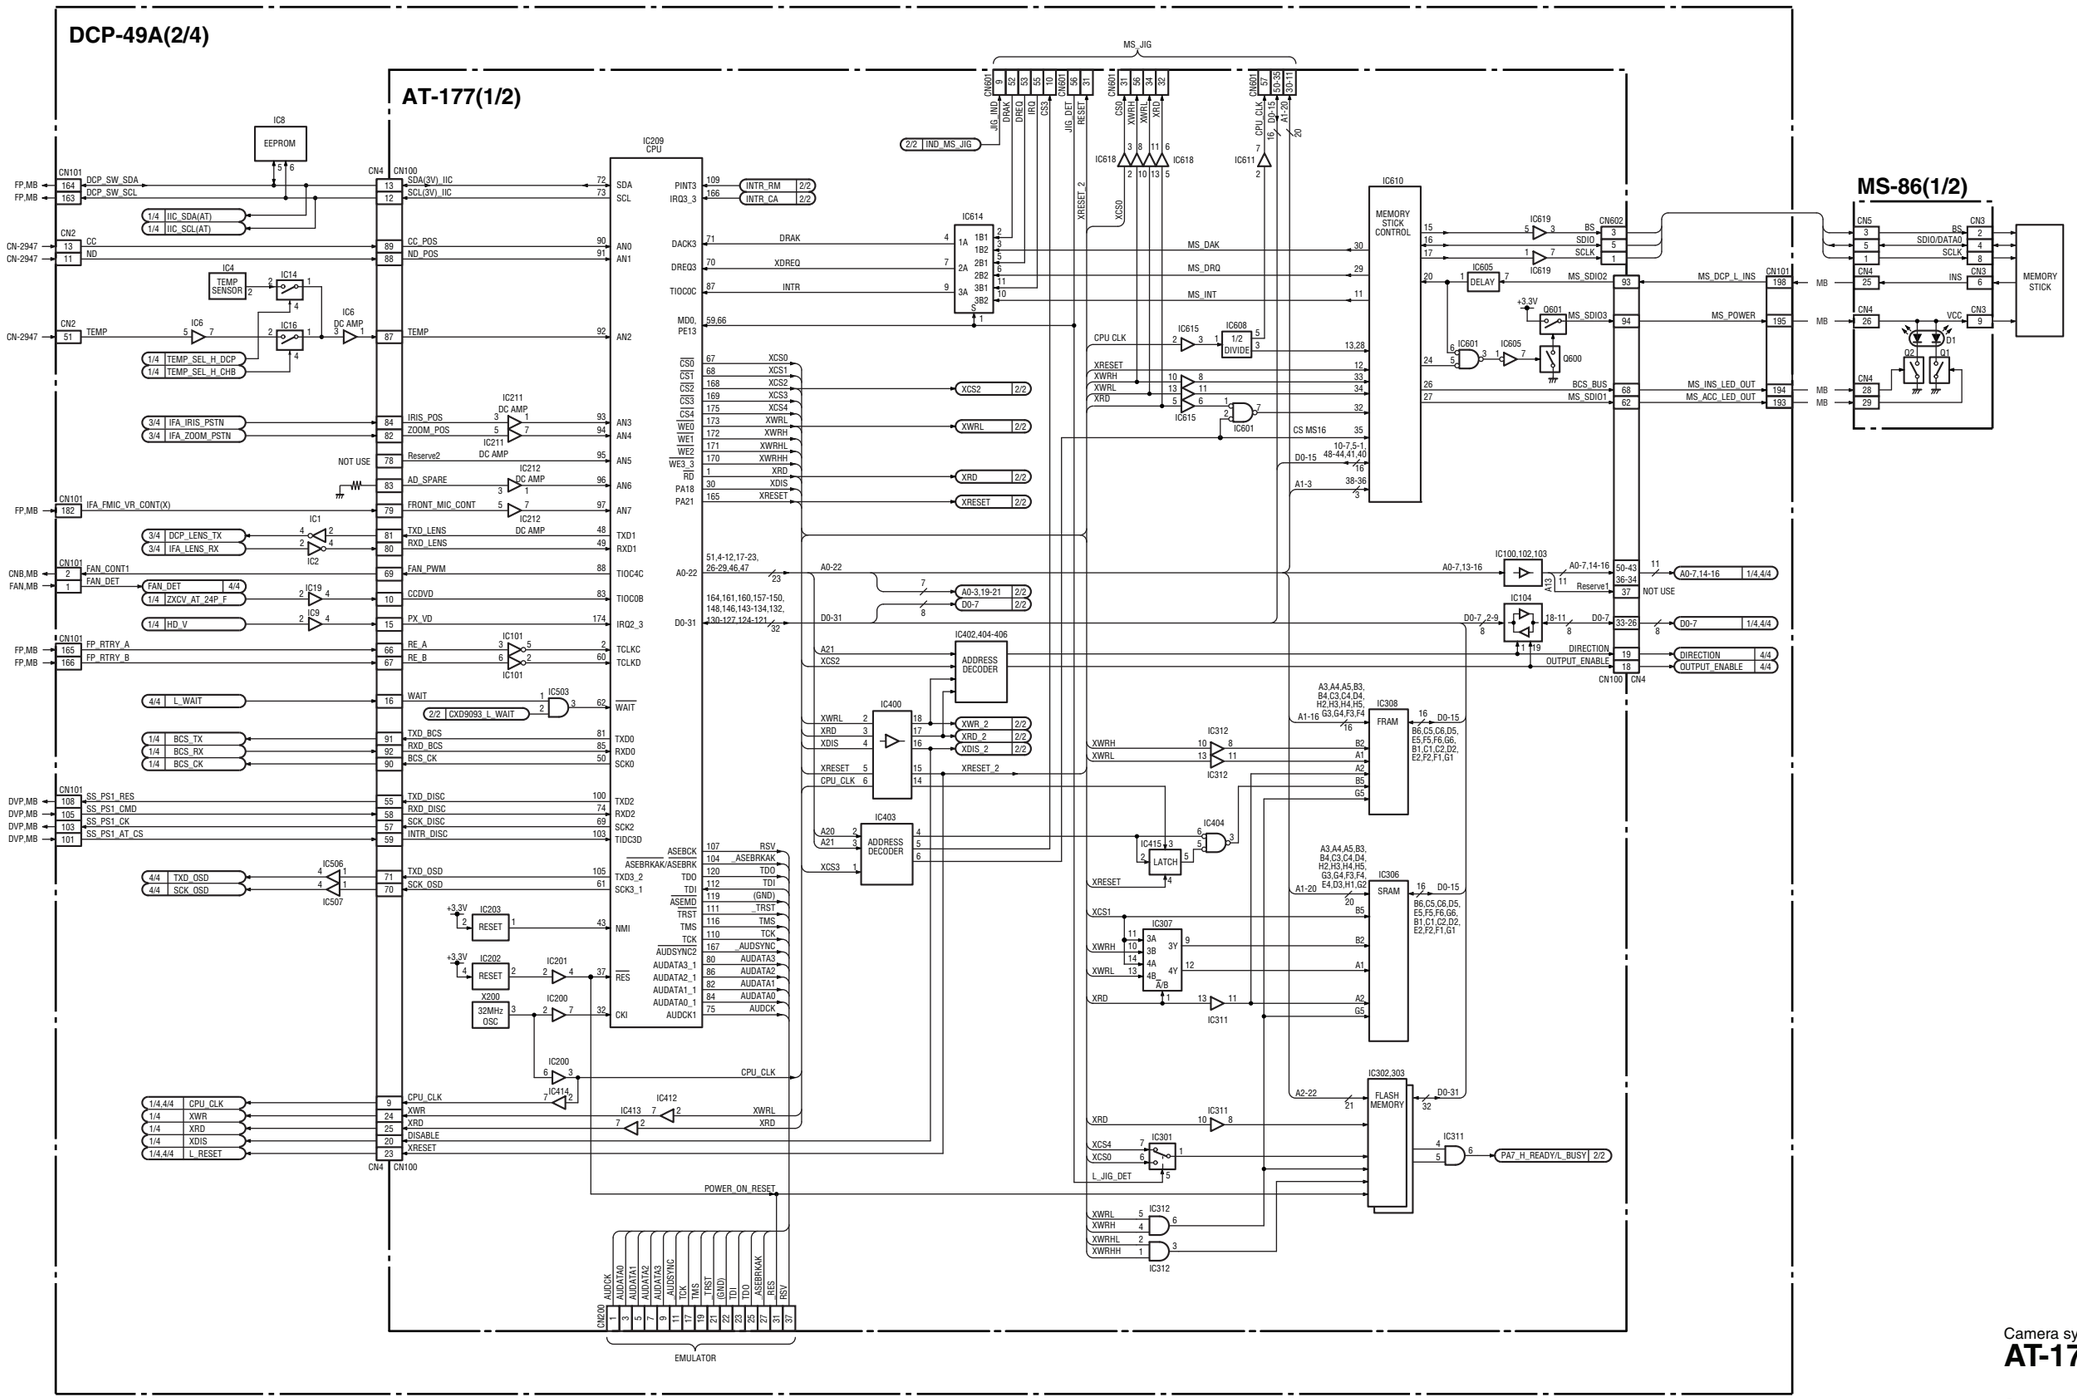

AT-177 (2/2), CN-3025, DCP-49A (3/4), IO-235 (1/3), RM-216, MS-86 (2/2), SW-1425

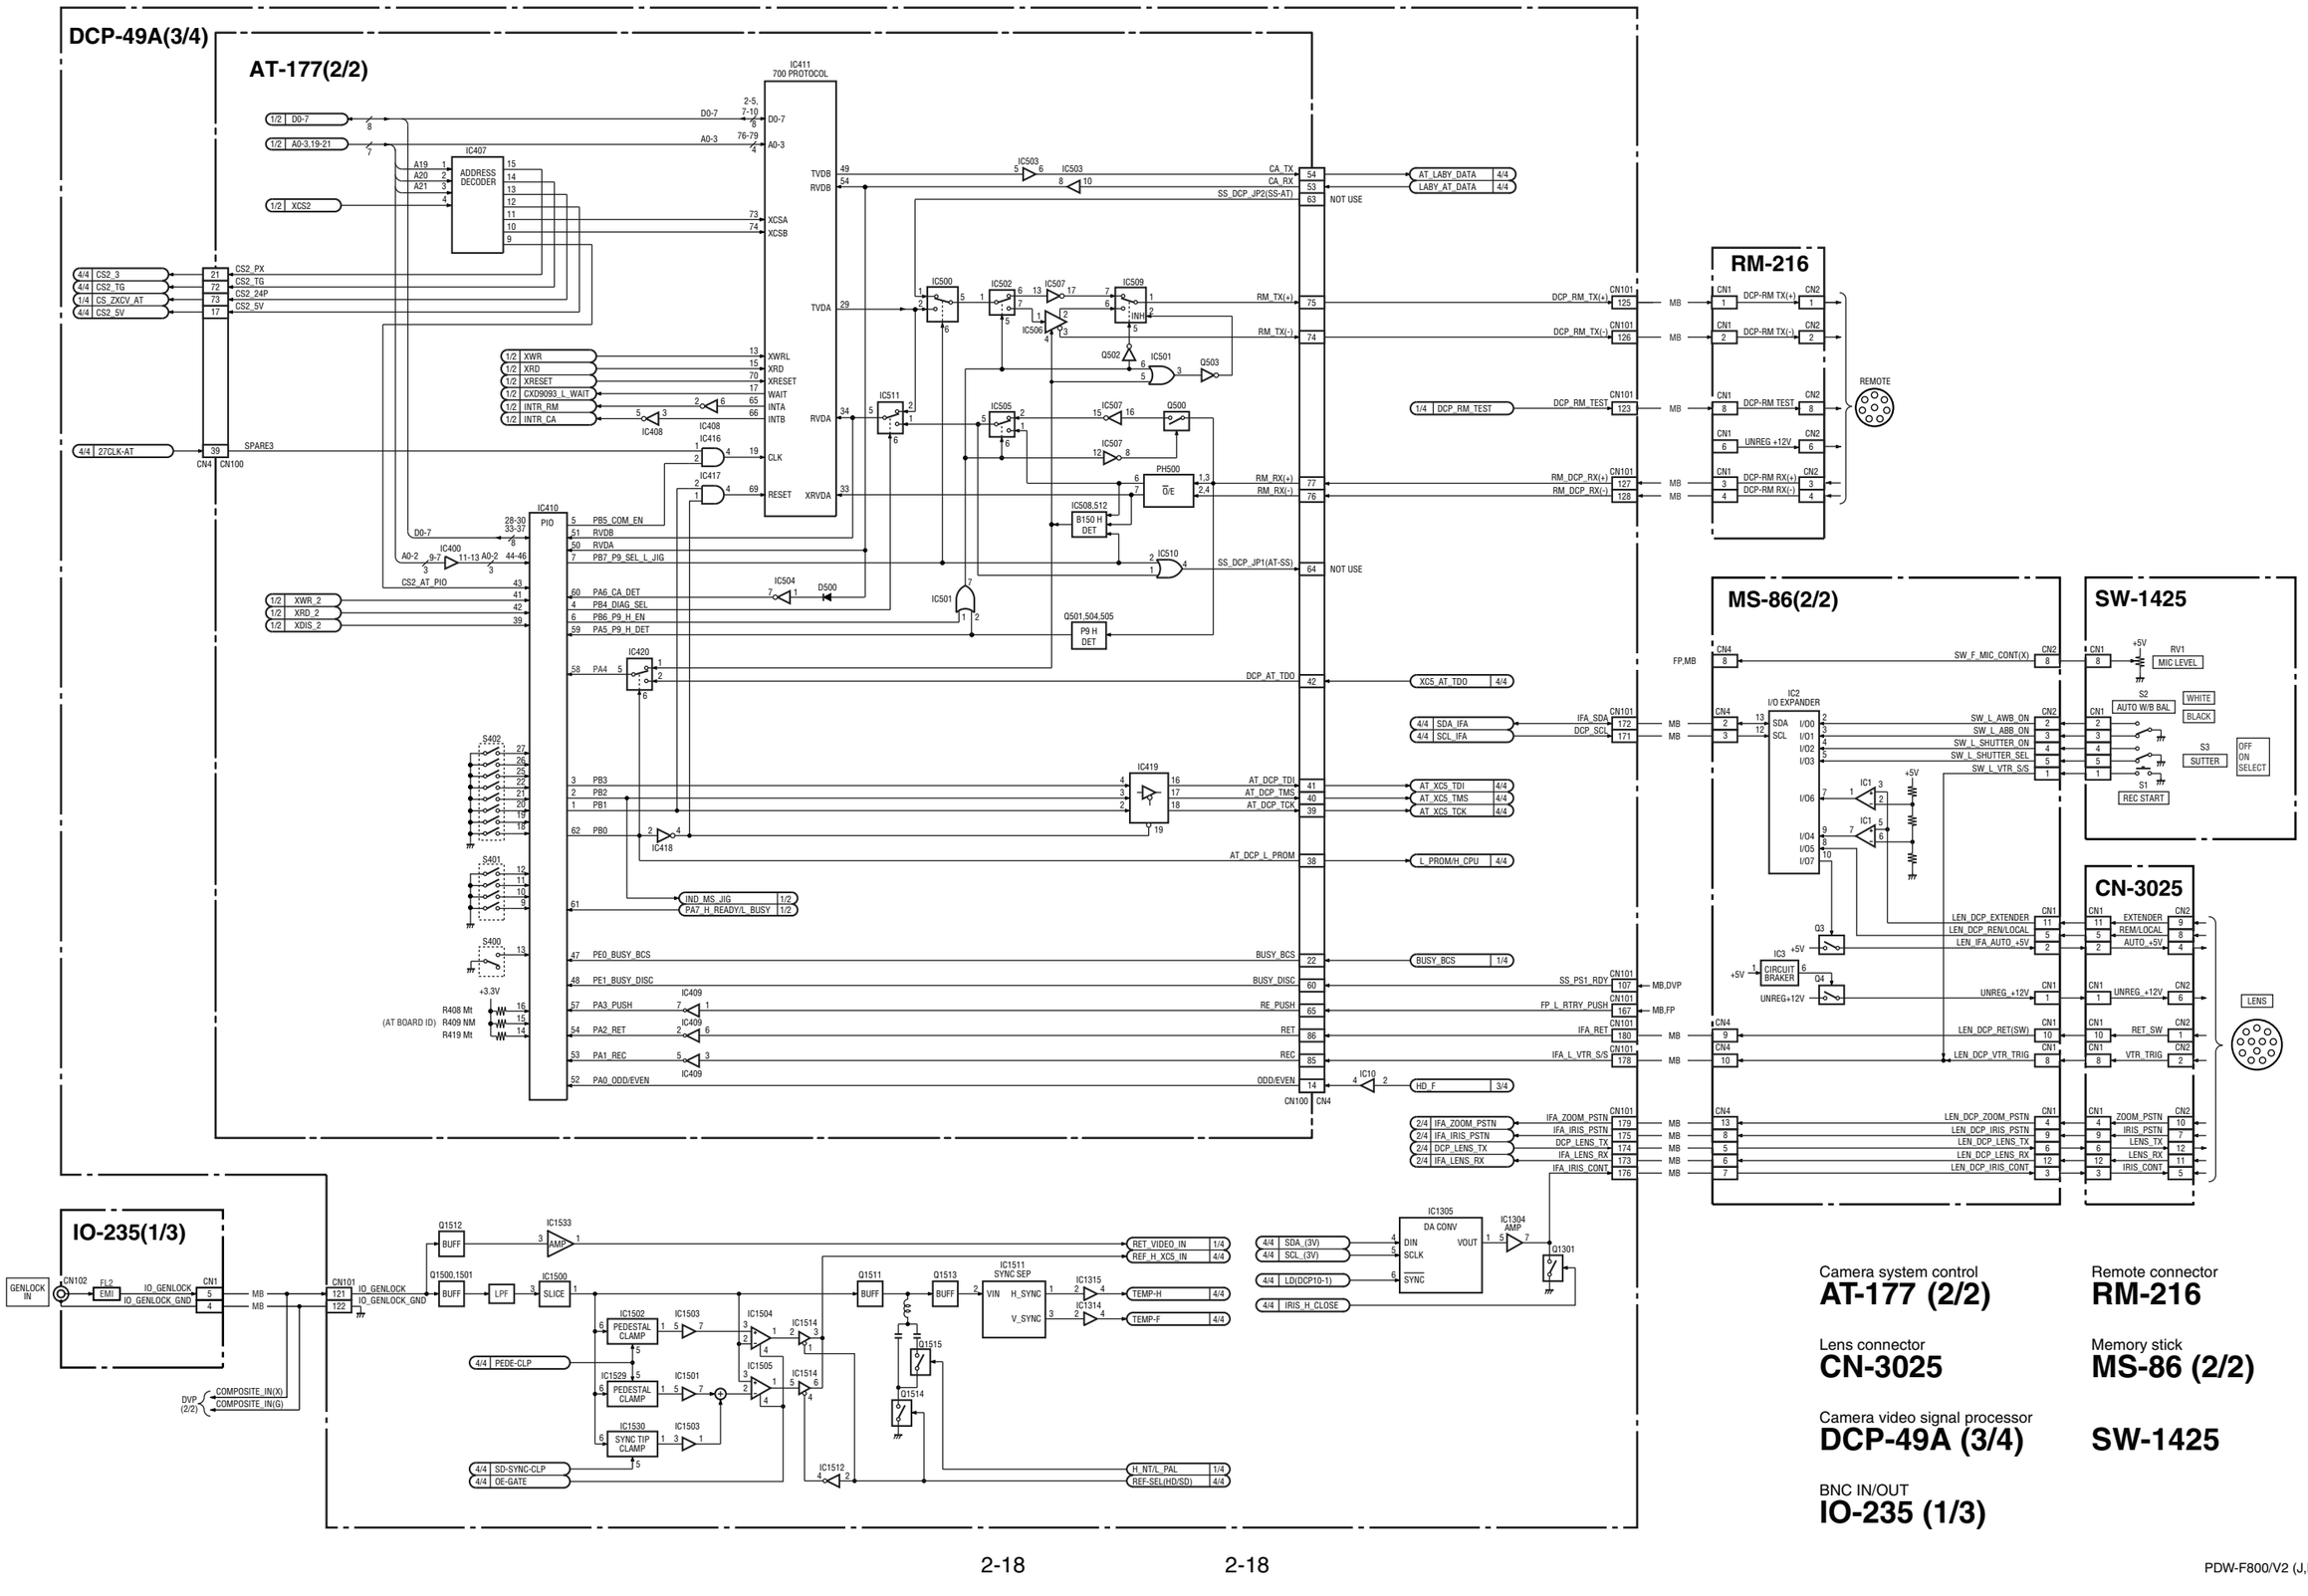

Camera system control
AT-177 (2/2)

Lens connector
CN-3025

Camera video signal processor
DCP-49A (3/4)


BNC IN/OUT
IO-235 (1/3)

Remote connector
RM-216

Memory stick
MS-86 (2/2)

SW-1425

DCP-49A (4/4), CI-37, IO-235 (2/3), RX-105

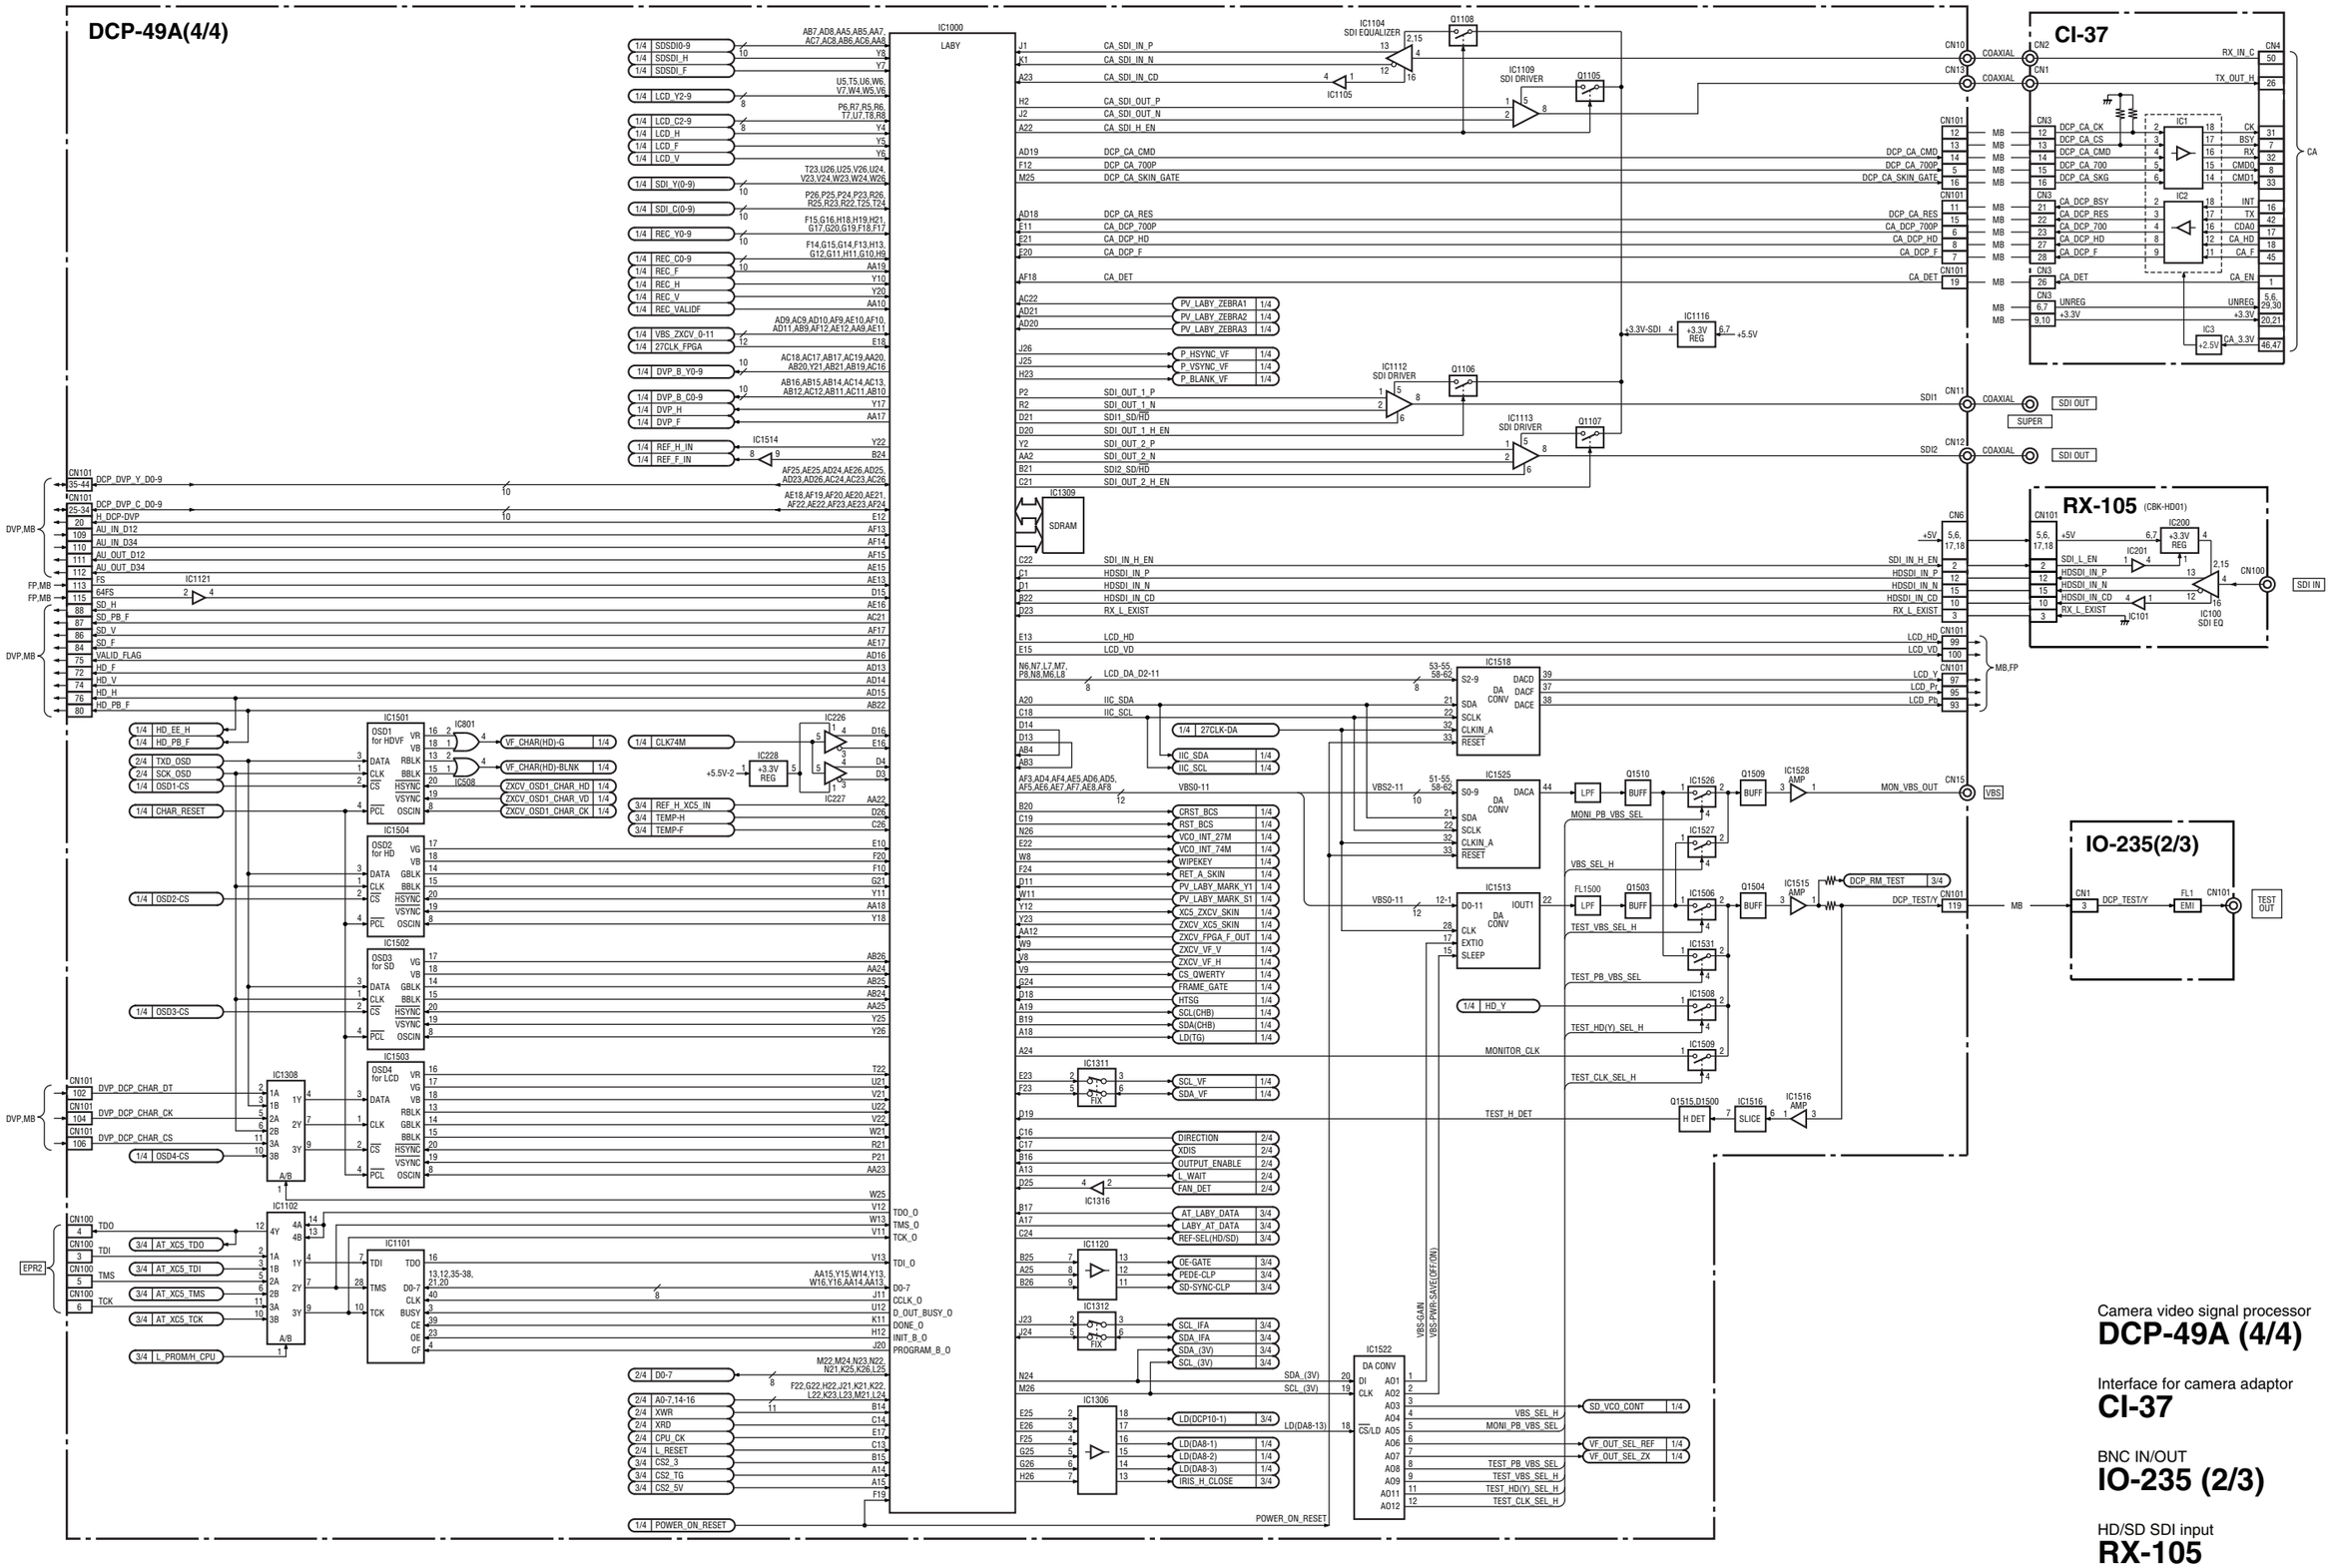


Camera video signal processor
DCP-49A (4/4)

Interface for camera adaptor
CI-37

BNC IN/OUT
IO-235 (2/3)

HD/SD SDI input
RX-105

DVP-45 (1/2), IO-235 (3/3)

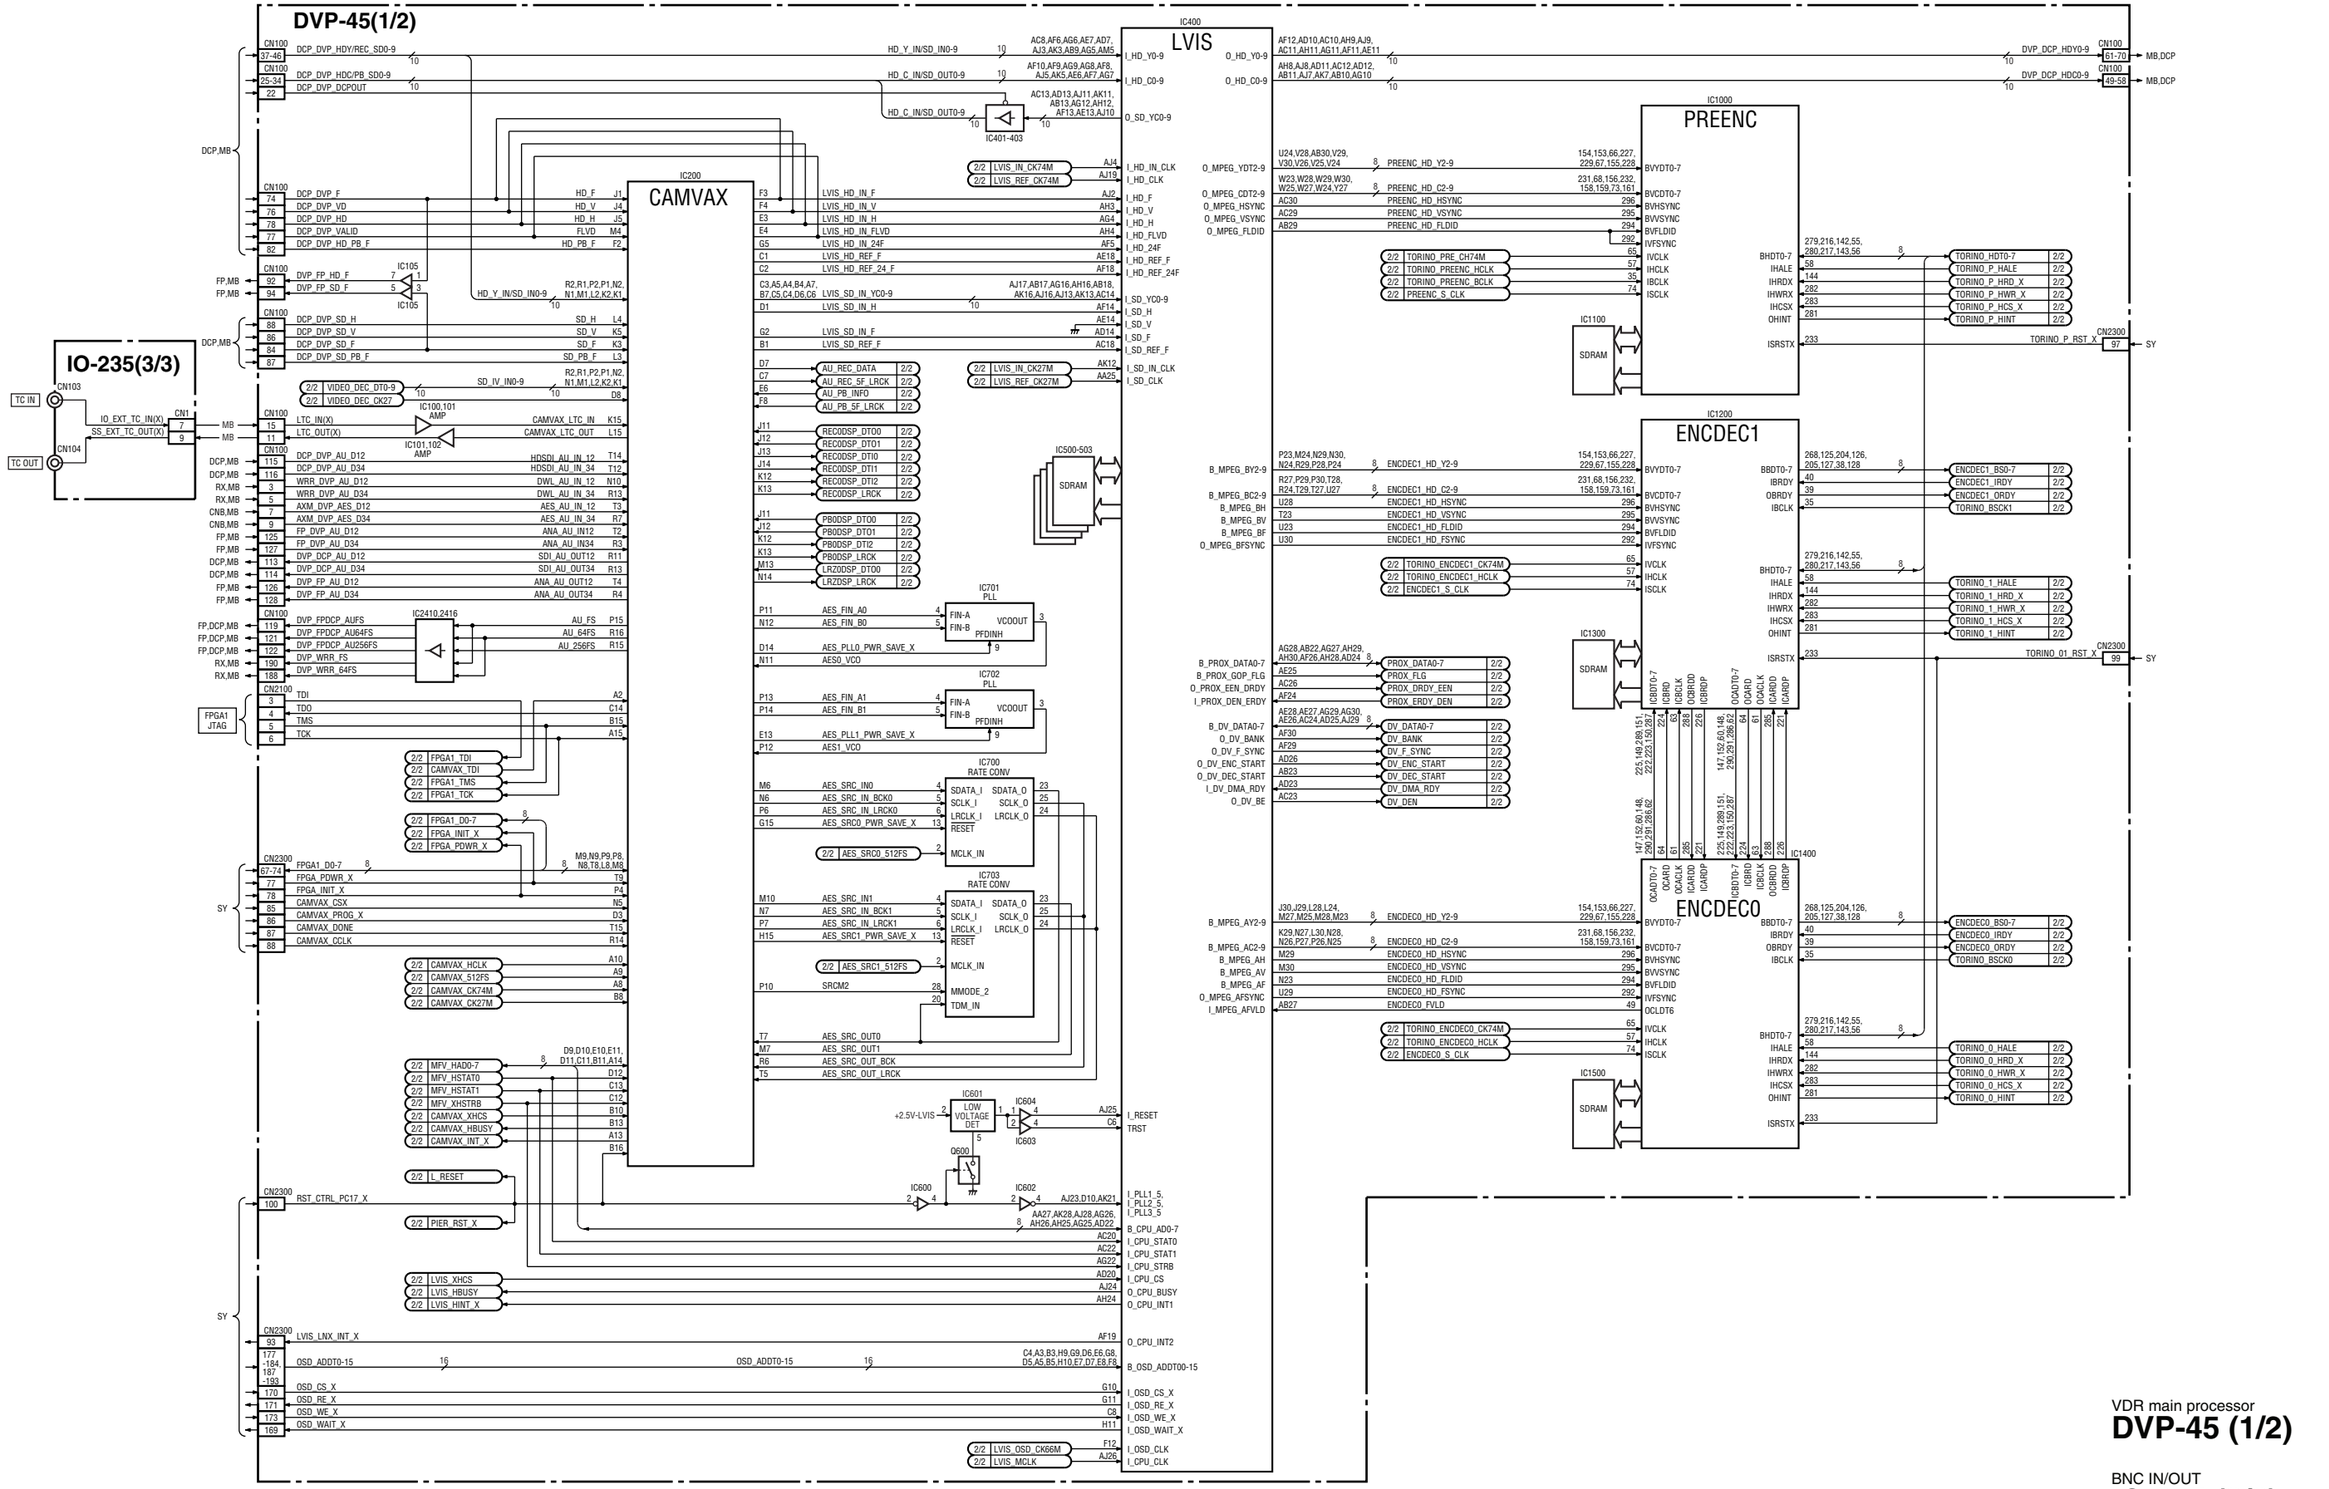

VDR main processor


DVP-45 (1/2)

BNC IN/OUT


IO-235 (3/3)

2-20

DVP-45 (2/2), IV-59, SW-1385

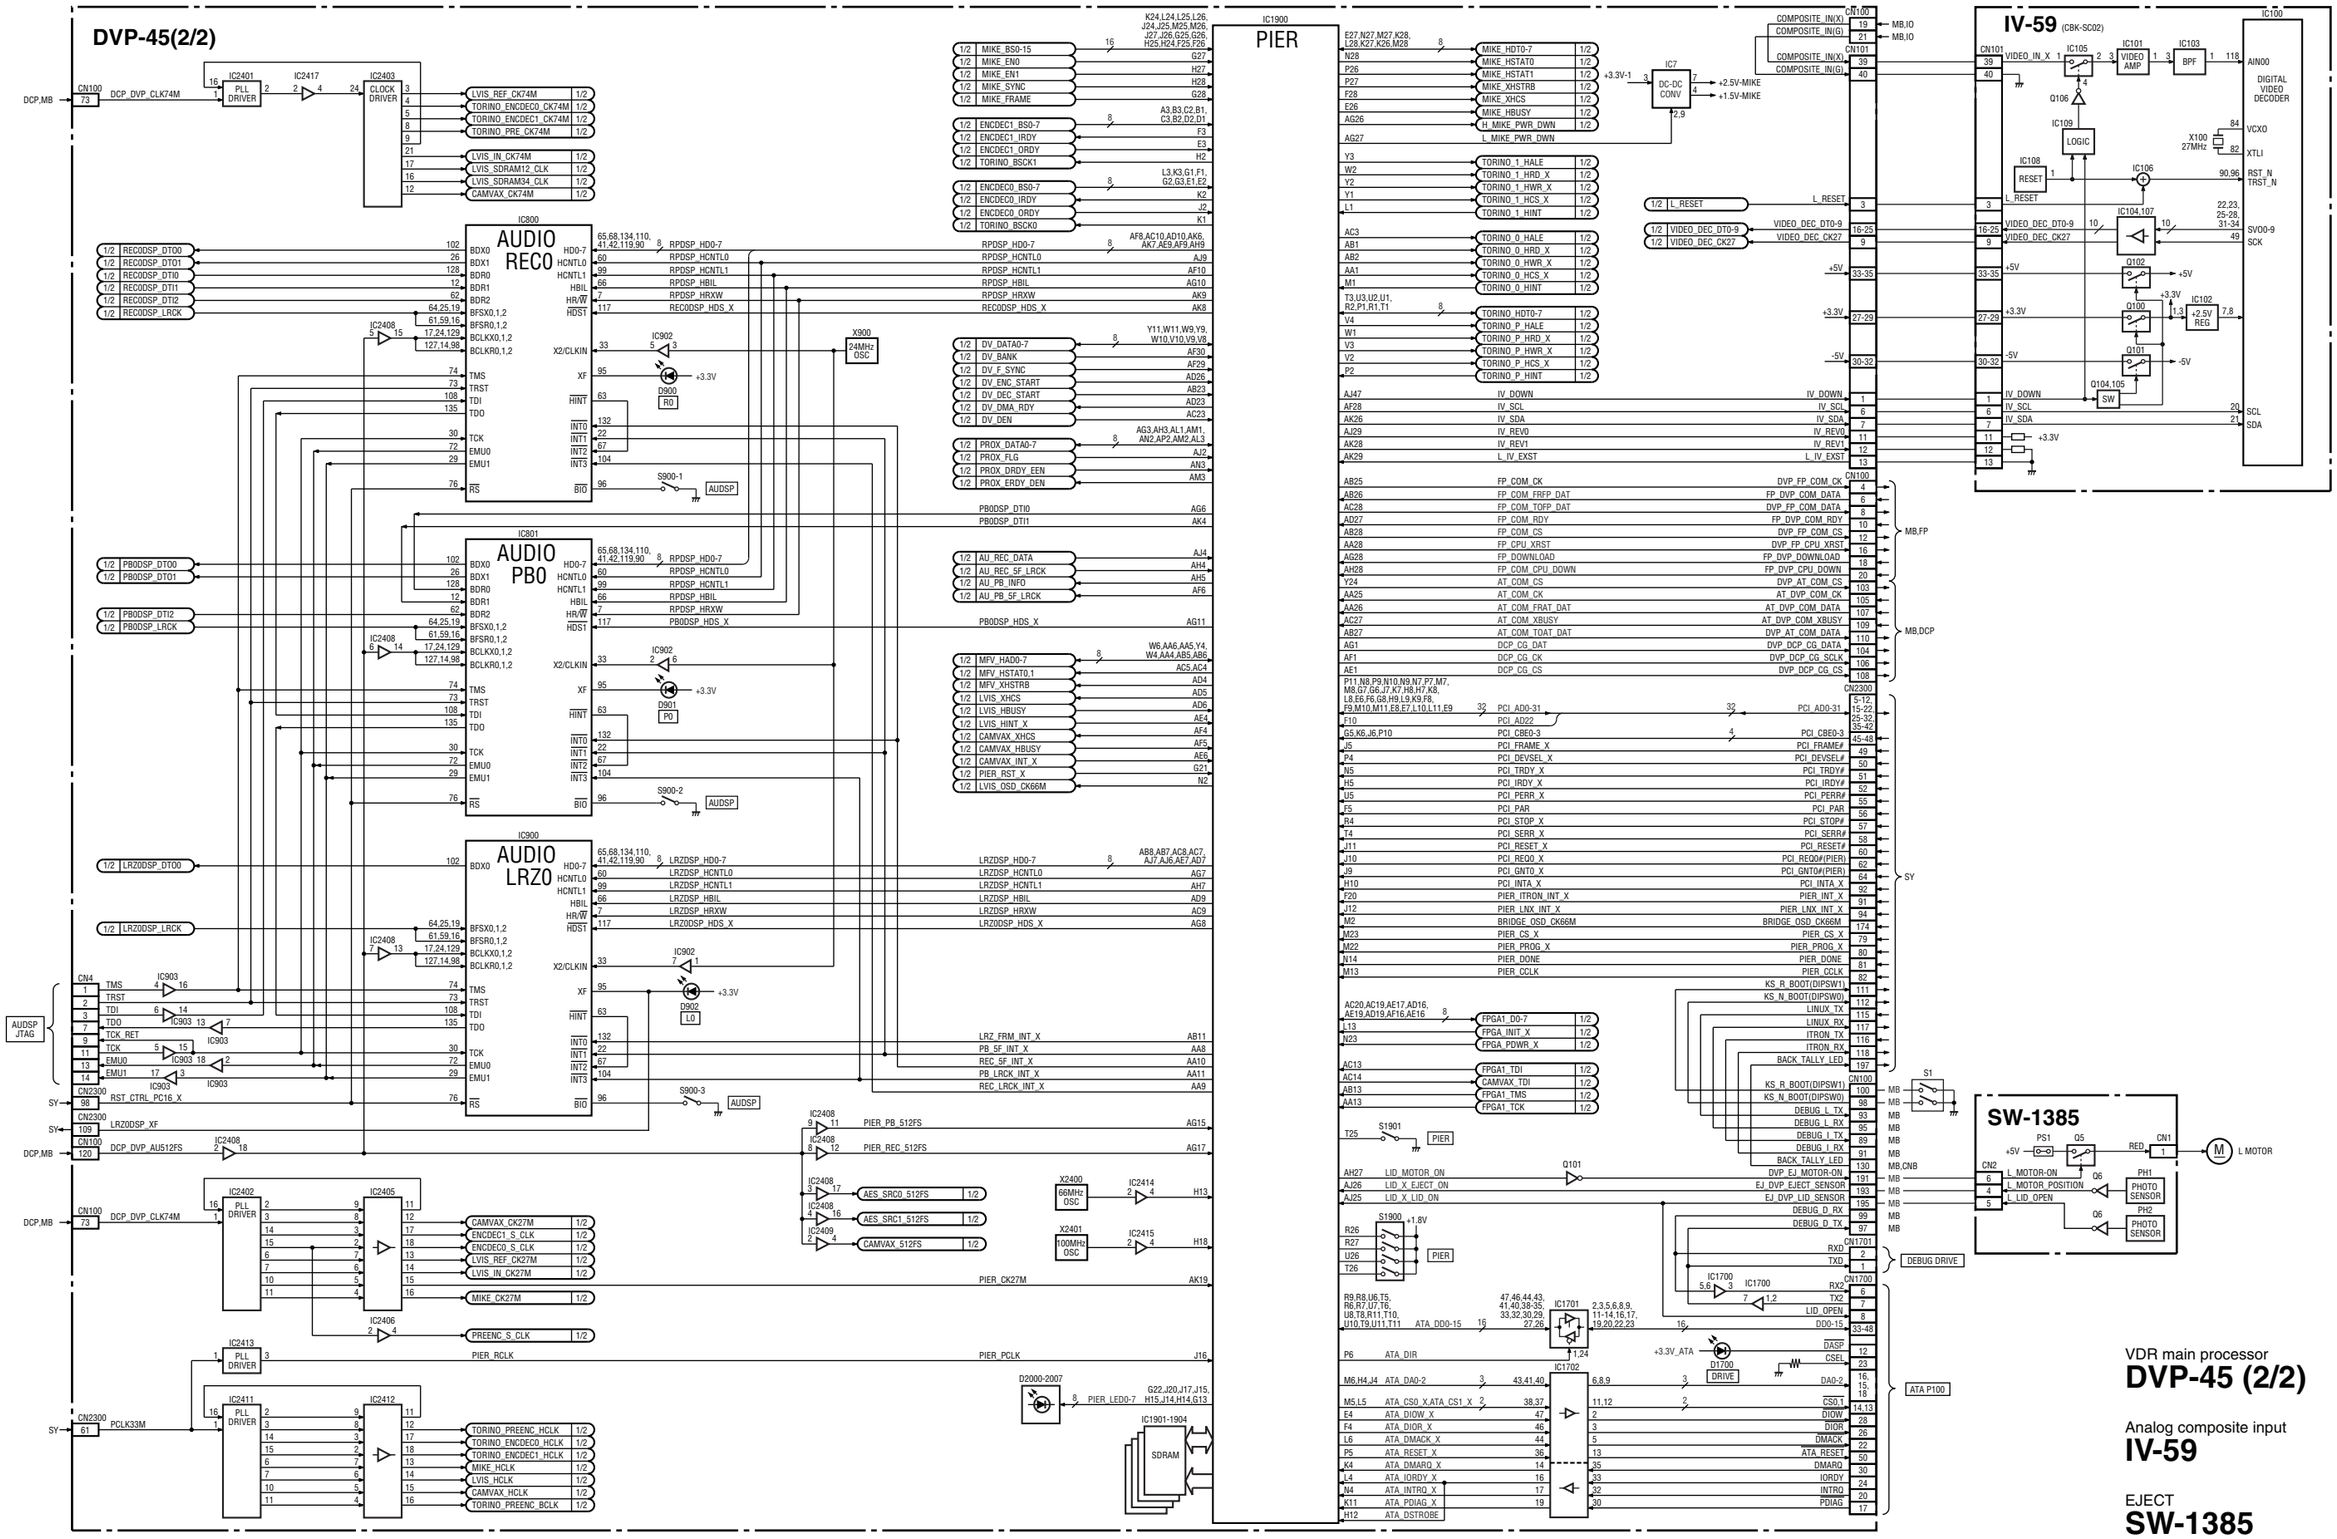

FP-157 (1/2), HP-148, HP-149, RX-101 (1/2)

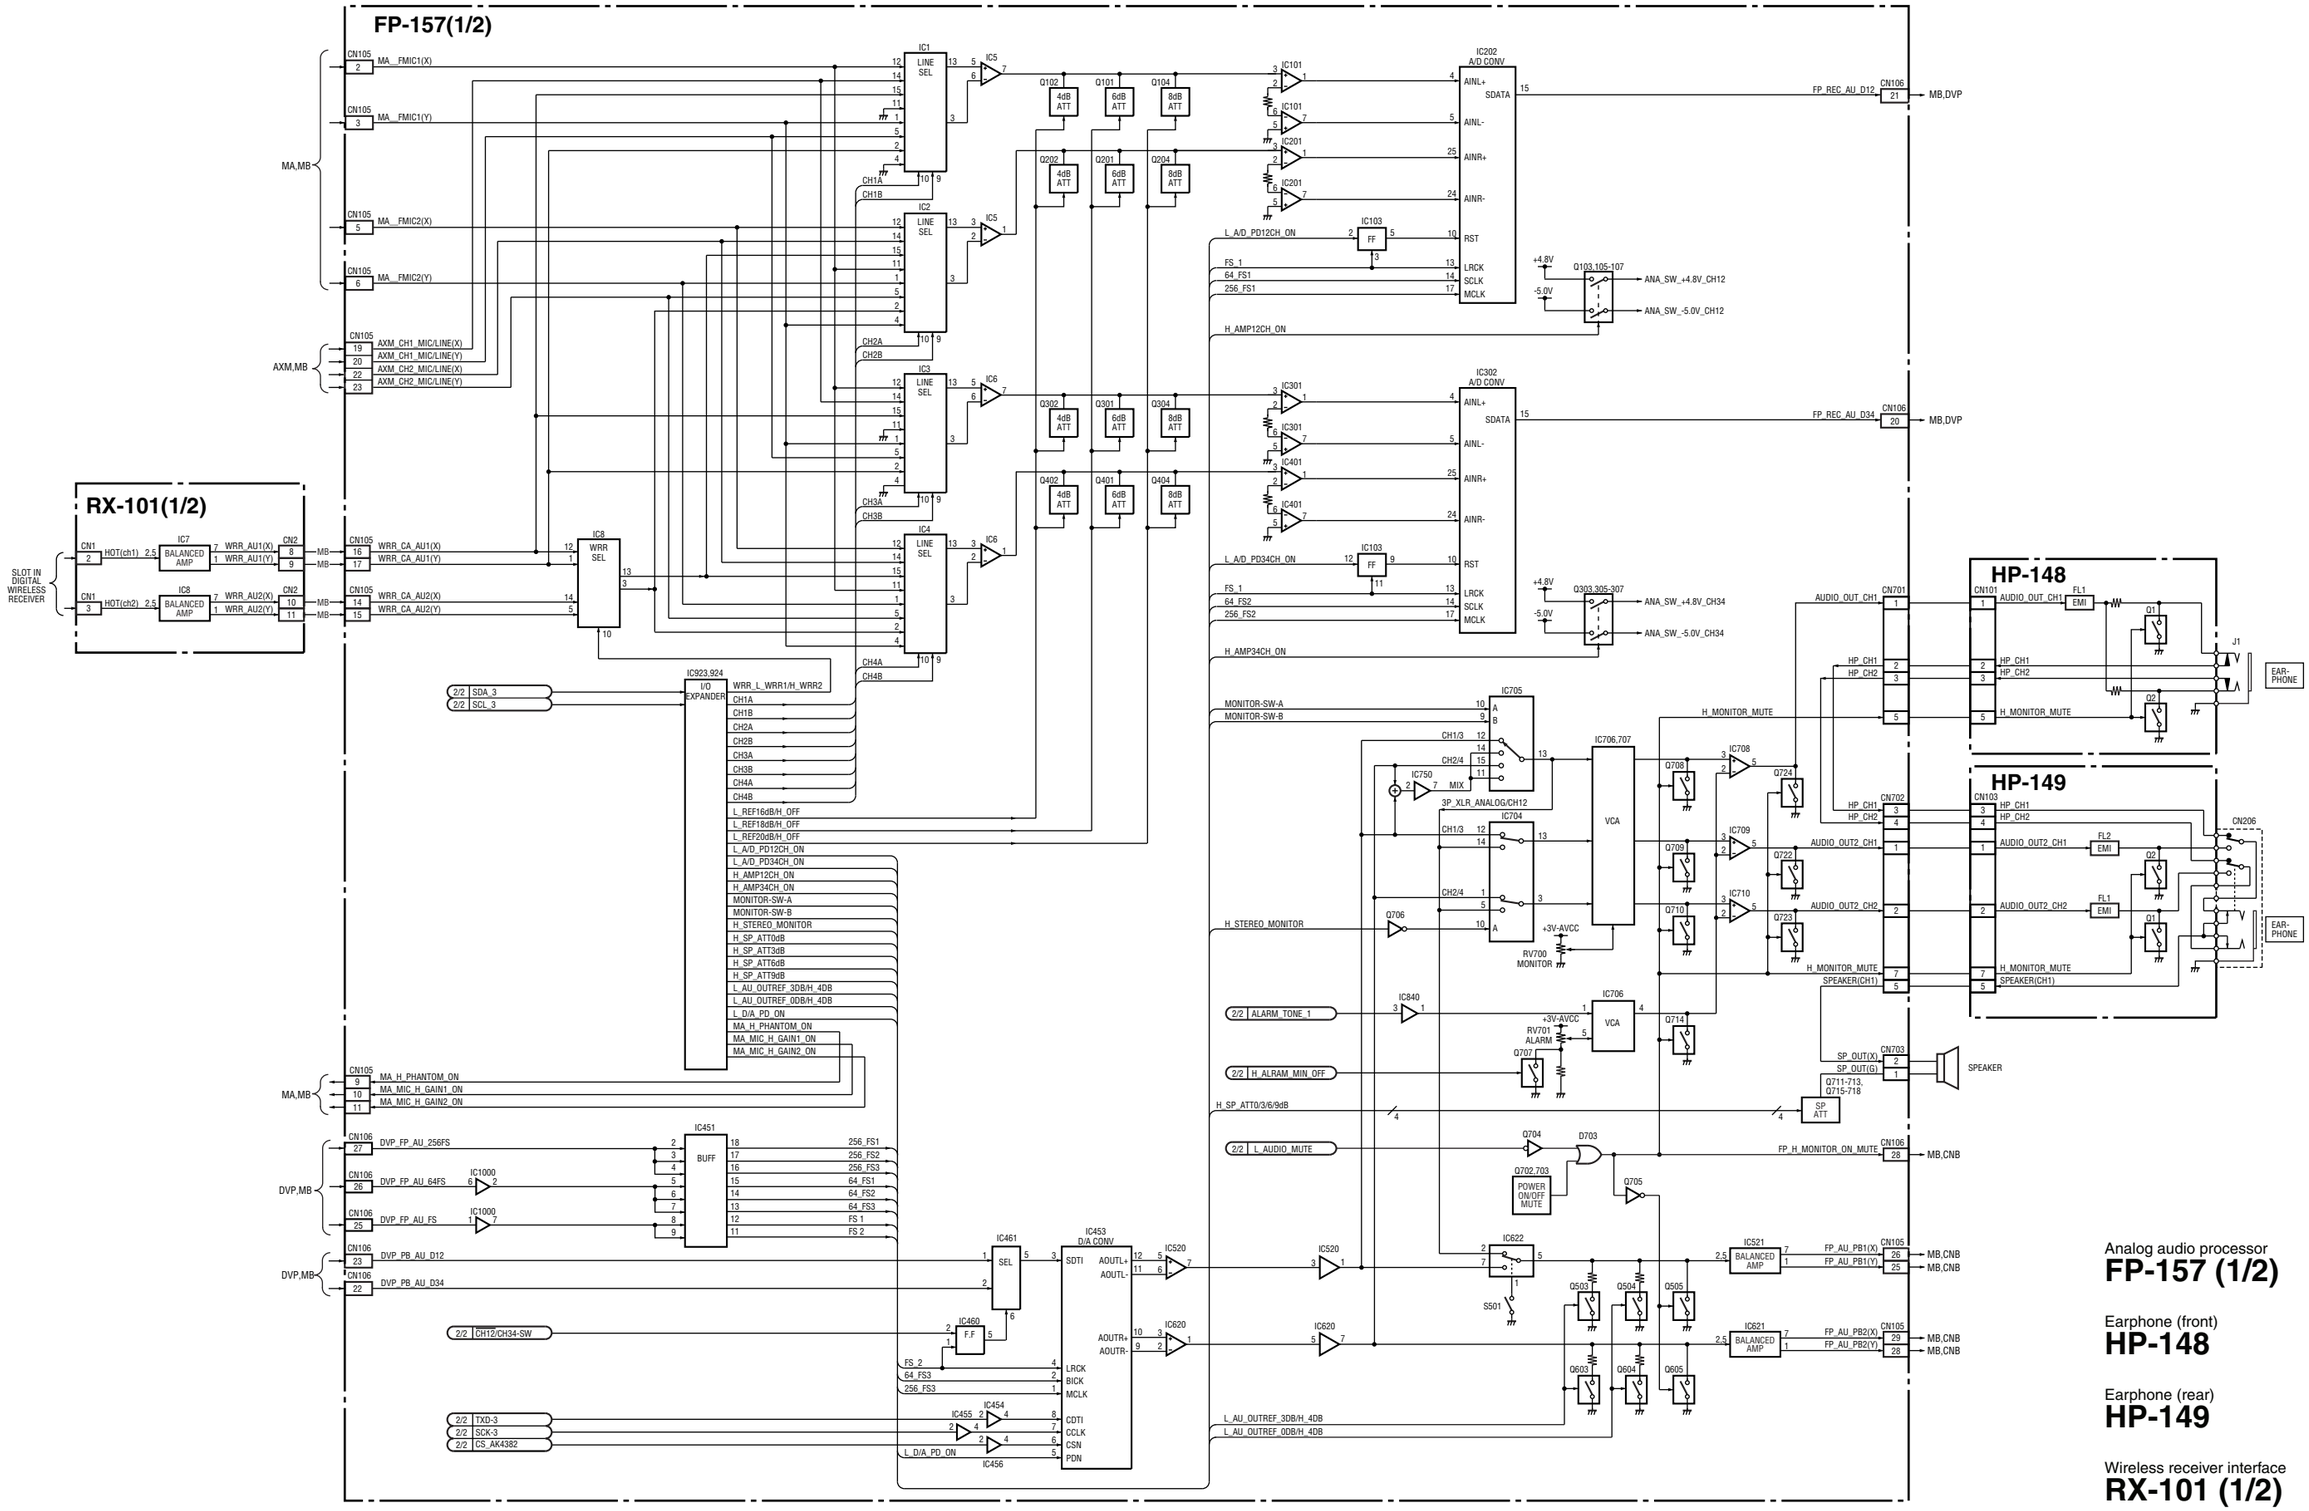

Analog audio processor
FP-157 (1/2)


Earphone (front)
HP-148

Earphone (rear)
HP-149

Wireless receiver interface
RX-101 (1/2)

2-22

DET-45, ENC-118, FP-157 (2/2), KY-623, LED-444, MB-1111 (2/2), PD-118, RX-101 (2/2), SW-1391

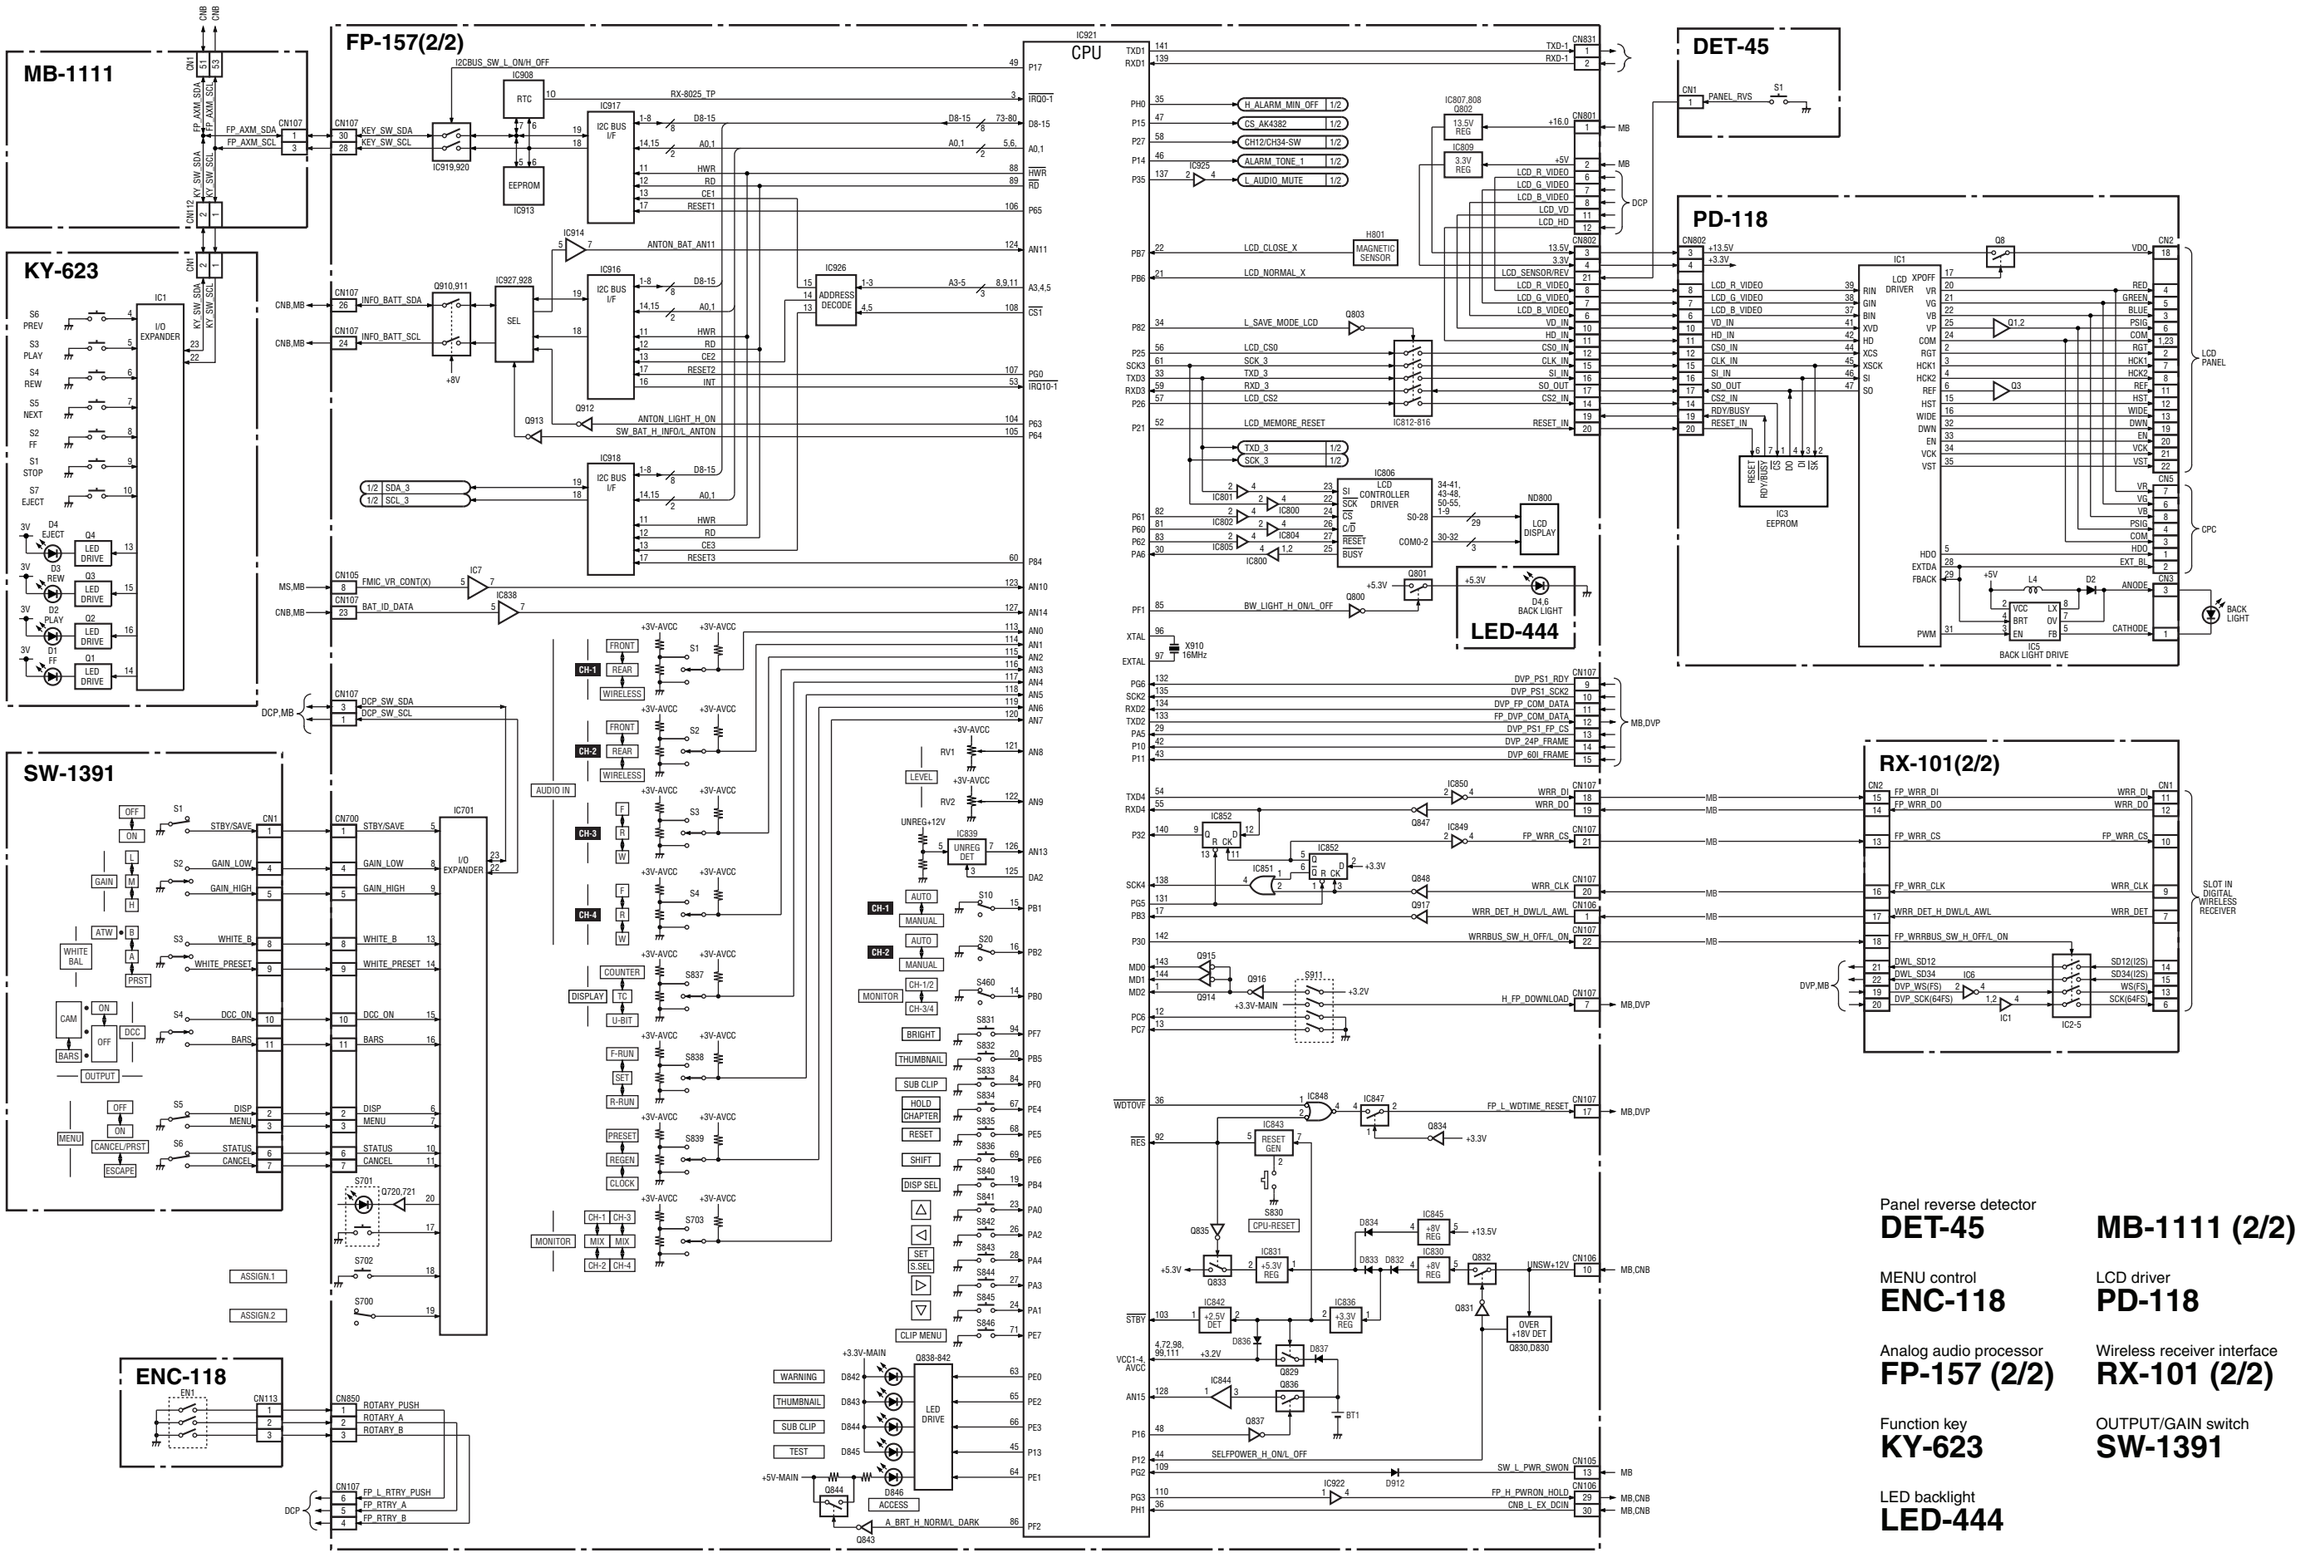

Panel reverse detector
DET-45

MB-1111 (2/2)

MENU control
ENC-118

LCD driver
PD-118


Analog audio processor
FP-157 (2/2)

Wireless receiver interface
RX-101 (2/2)

Function key
KY-623

OUTPUT/GAIN switch
SW-1391

LED backlight
LED-444

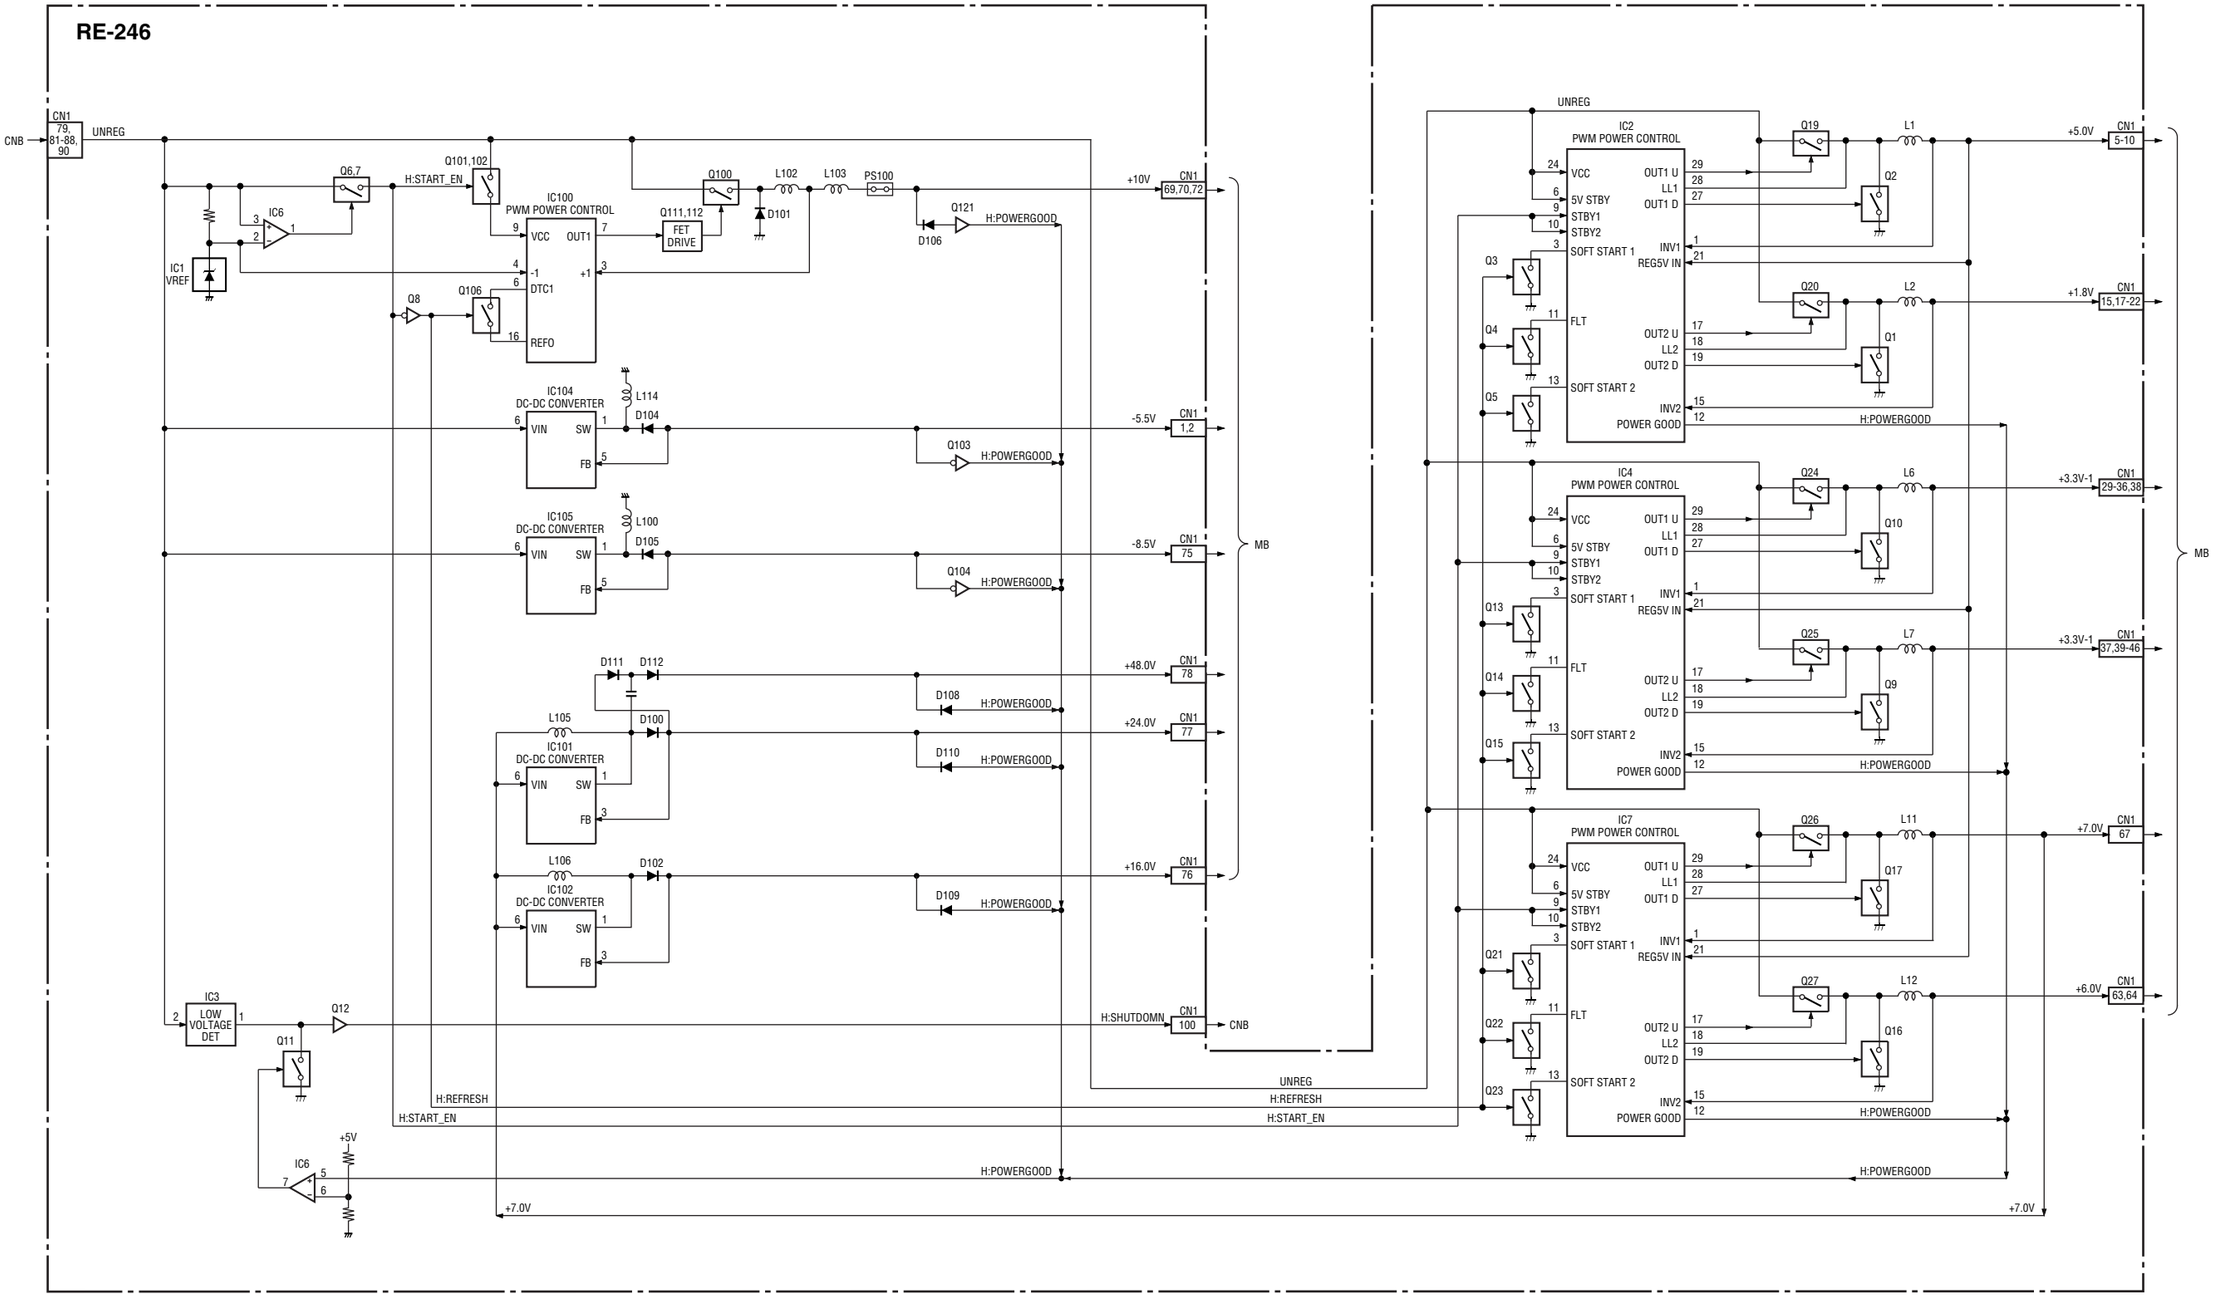


Regulator
RE-246

Section 3
Schematic Diagrams


Index

Board Name	Page
AT-177	3-2
AXM-38	3-6
CI-37	3-7
CN-2946	3-8
CN-2947	3-9
CN-2948	3-9
CN-3001	3-9
CN-3005	3-10
CN-3025	3-11
CN-3026	3-11
CNB-25	3-12
DCP-49A	3-16
DET-45	3-34
DET-47	3-34
DR-606	3-35
DR-617	3-42
DVP-45	3-44
ENC-118	3-69
FP-157	3-71
HP-148	3-83
HP-149	3-83
IO-235	3-84
KY-623	3-85
LED-444	3-86
MA-162	3-87
MB-1111	3-88
MS-86	3-90
PA-342A	3-91
PA-343A	3-92
PA-344	3-93
PD-118	3-94
PS-708	3-95
PS-731	3-97
RE-246	3-98
RM-216	3-101
RX-101	3-102
SE-709	3-103
SE-803	3-103
SE-857	3-103
SE-858	3-104
SW-1125G	3-104
SW-1249	3-105
SW-1352	3-105
SW-1385	3-105
SW-1391	3-106
SW-1425	3-106
SW-1426	3-106
SY-355	3-107
TG-260	3-130
RX-105 (CBK-HD01)	3-132
IV-59 (CBK-SC02)	3-133
Frame Wiring	3-134

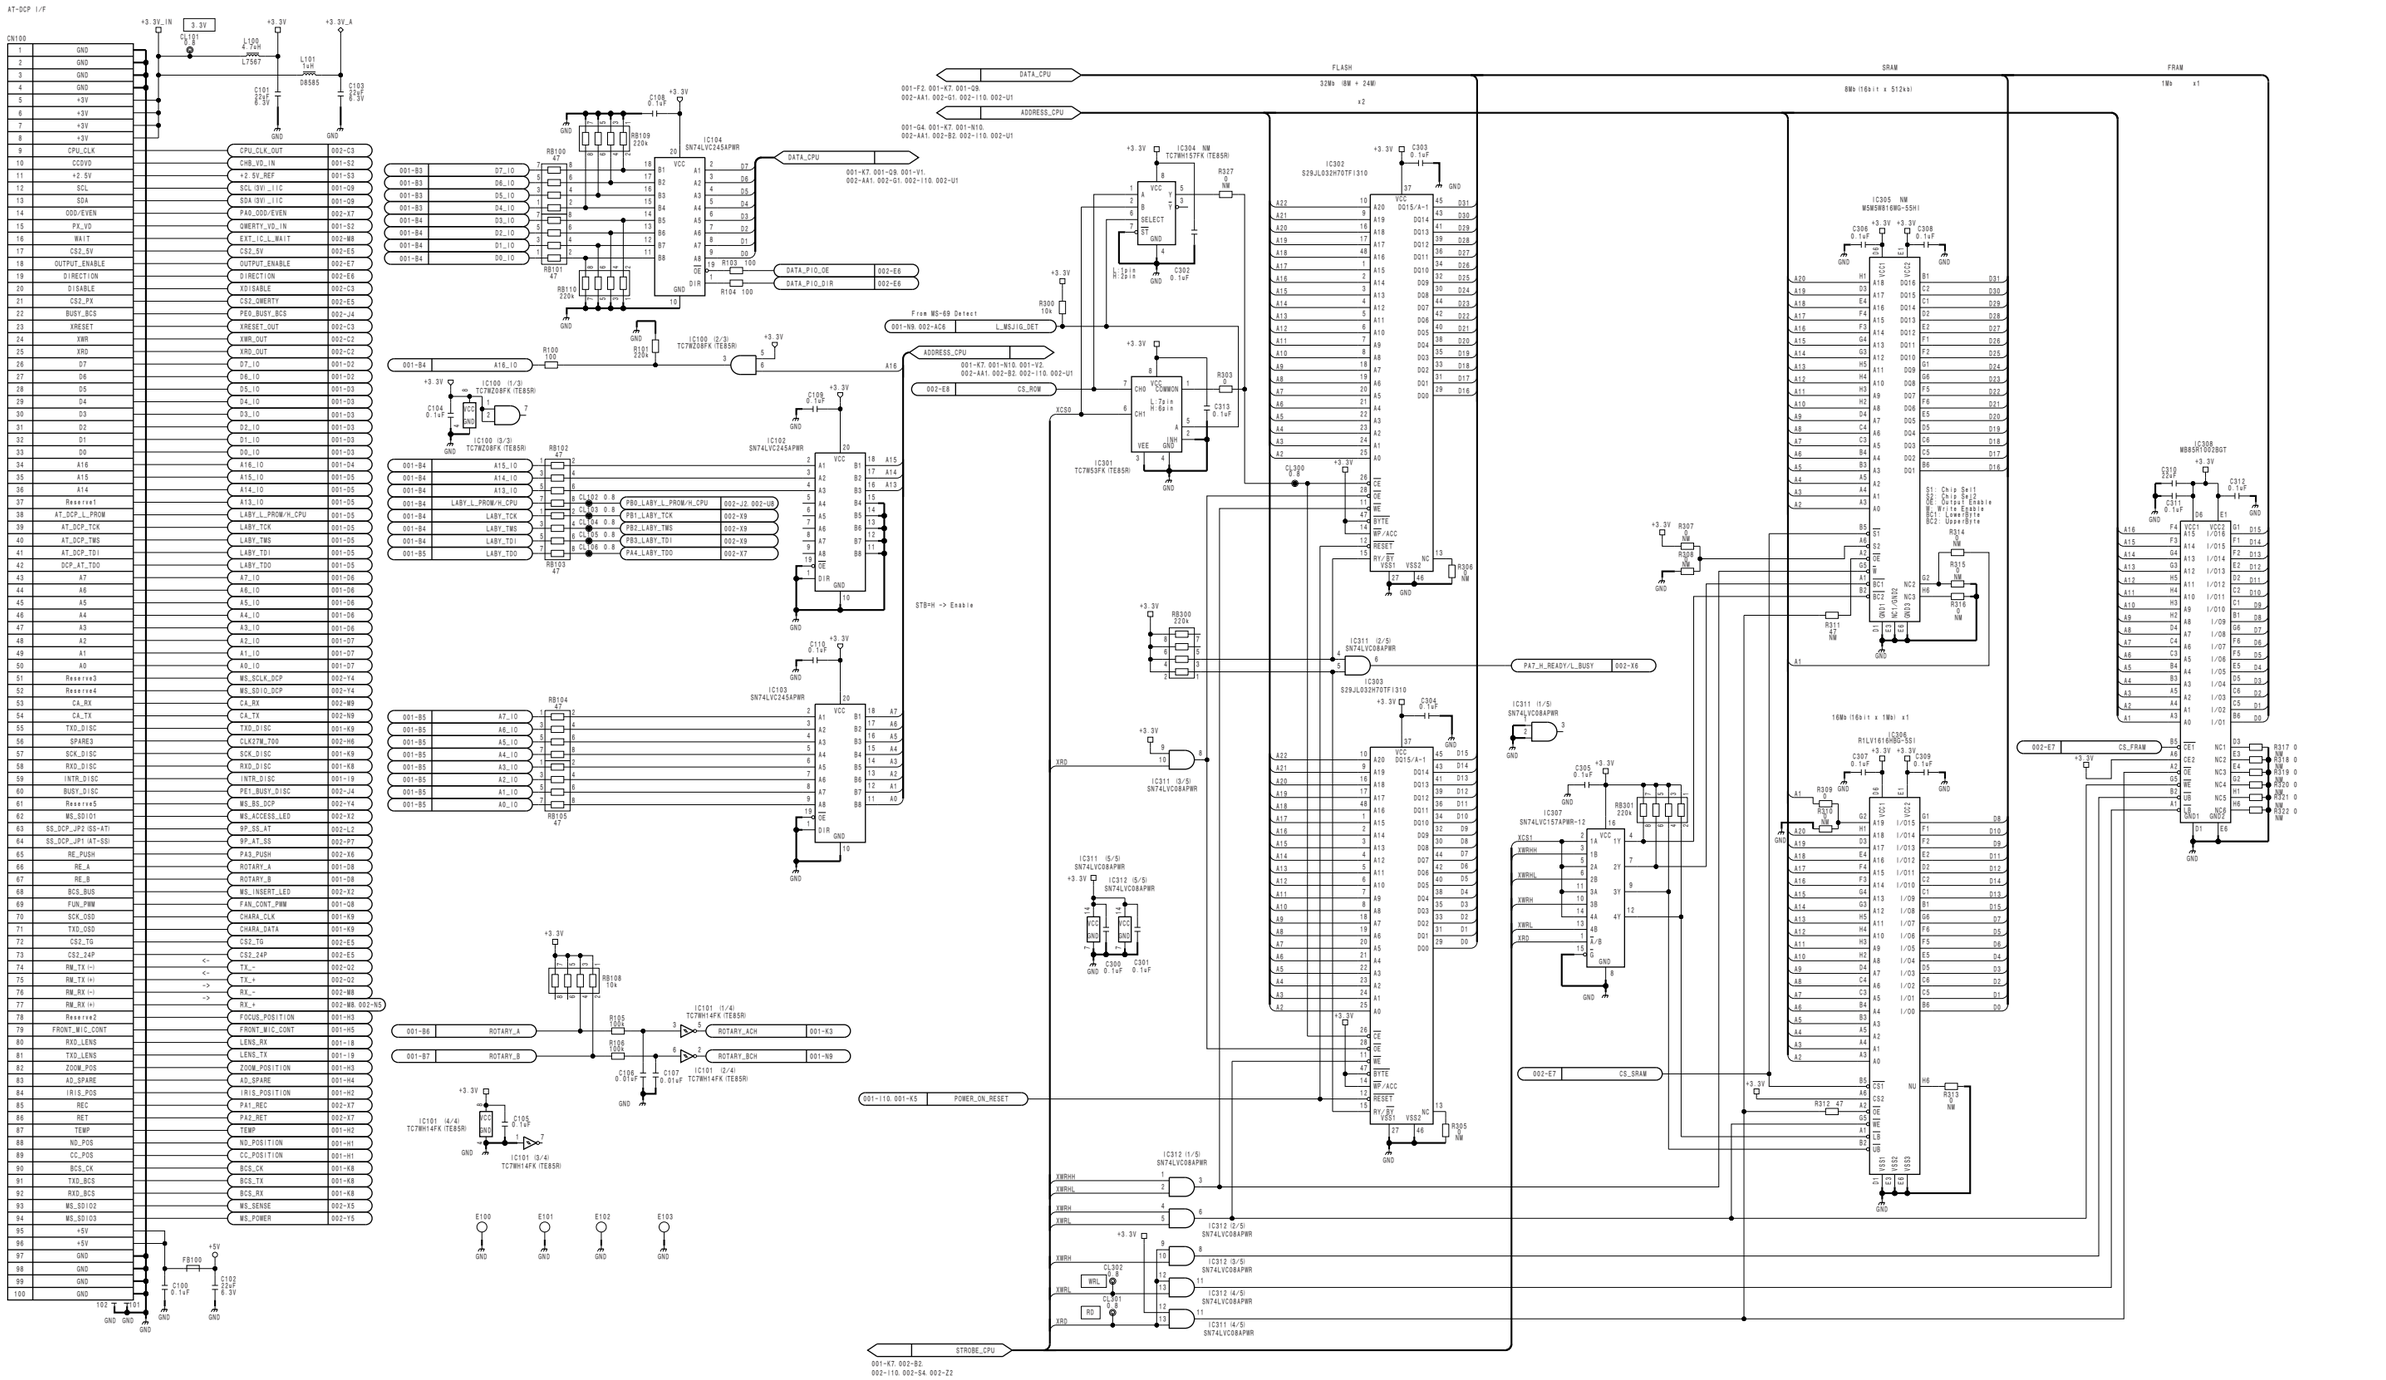

AT-DCP I/F
CN100
GND
+3.3V
+5V
CPU_CLK_OUT
CHB_VD_IN
+2.5V_REF
SCL (3V)_I2C
SDA (3V)_I2C
ODD/EVEN
PX_VD
WAIT
CS2_5V
OUTPUT_ENABLE
DIRECTION
XDISABLE
CS2_PX
BUSY_BCS
XRESET
XWR
XRD
D7
D6
D5
D4
D3
D2
D1
D0
A16
A15
A14
A13
Reserve1
AT_DCP_L_PROM
AT_DCP_TCK
AT_DCP_TMS
AT_DCP_TDI
DCP_AT_TDO
A7
A6
A5
A4
A3
A2
A1
A0
Reserve3
Reserve4
CA_RX
CA_TX
TXD_DISC
SPARE3
SCK_DISC
RXD_DISC
INTR_DISC
BUSY_DISC
Reserve5
MS_SDIO1
SS_DCP_JP2 (SS-AT)
SS_DCP_JP1 (AT-SS)
RE_PUSH
RE_A
RE_B
BCS_BUS
FUN_PWM
SCK_OSD
TXD_OSD
CS2_TG
CS2_24P
RM_TX (-)
RM_TX (+)
RM_RX (-)
RM_RX (+)
Reserve2
FRONT_MIC_CONT
RXD_LENS
TXD_LENS
ZOOM_POS
AD_SPARE
IRIS_POS
REC
RET
TEMP
ND_POS
CC_POS
BCS_CK
TXD_BCS
RXD_BCS
MS_SDIO2
MS_SDIO3
FLASH
32Mb (8M x 24M)
x2
SRAM
8Mb (16bit x 512kb)
FRAM
1Mb x1
DATA_CPU
ADDRESS_CPU
CS_ROM
CS_SRAM
CS_FRAM
POWER_ON_RESET
STROBE_CPU
PA7_H_READY/L_BUSY
L_MSJIG_DET
From MS-69 Detect
STB#H -> Enable
IC100 TC7MZ08FK (TE85R)
IC101 TC7WH14FK (TE85R)
IC102 SN74LVC245APWR
IC103 SN74LVC245APWR
IC104 SN74LVC245APWR
IC301 TC7MS3FK (TE85R)
IC302 S29JL032H70TFI310
IC303 S29JL032H70TFI310
IC304 NM TC7WH157FK (TE85R)
IC305 NM MSM5R81(RG-55H)
IC306 R1LV1616HBG-5SI
IC307 SN74LVC157APWR-12
IC308 MB85R1002BGT
IC311 SN74LVC08APWR
IC312 SN74LVC08APWR


AT-177 (1/2)
SUFFIX: -12

AT-177 (1/2)
SUFFIX: -12

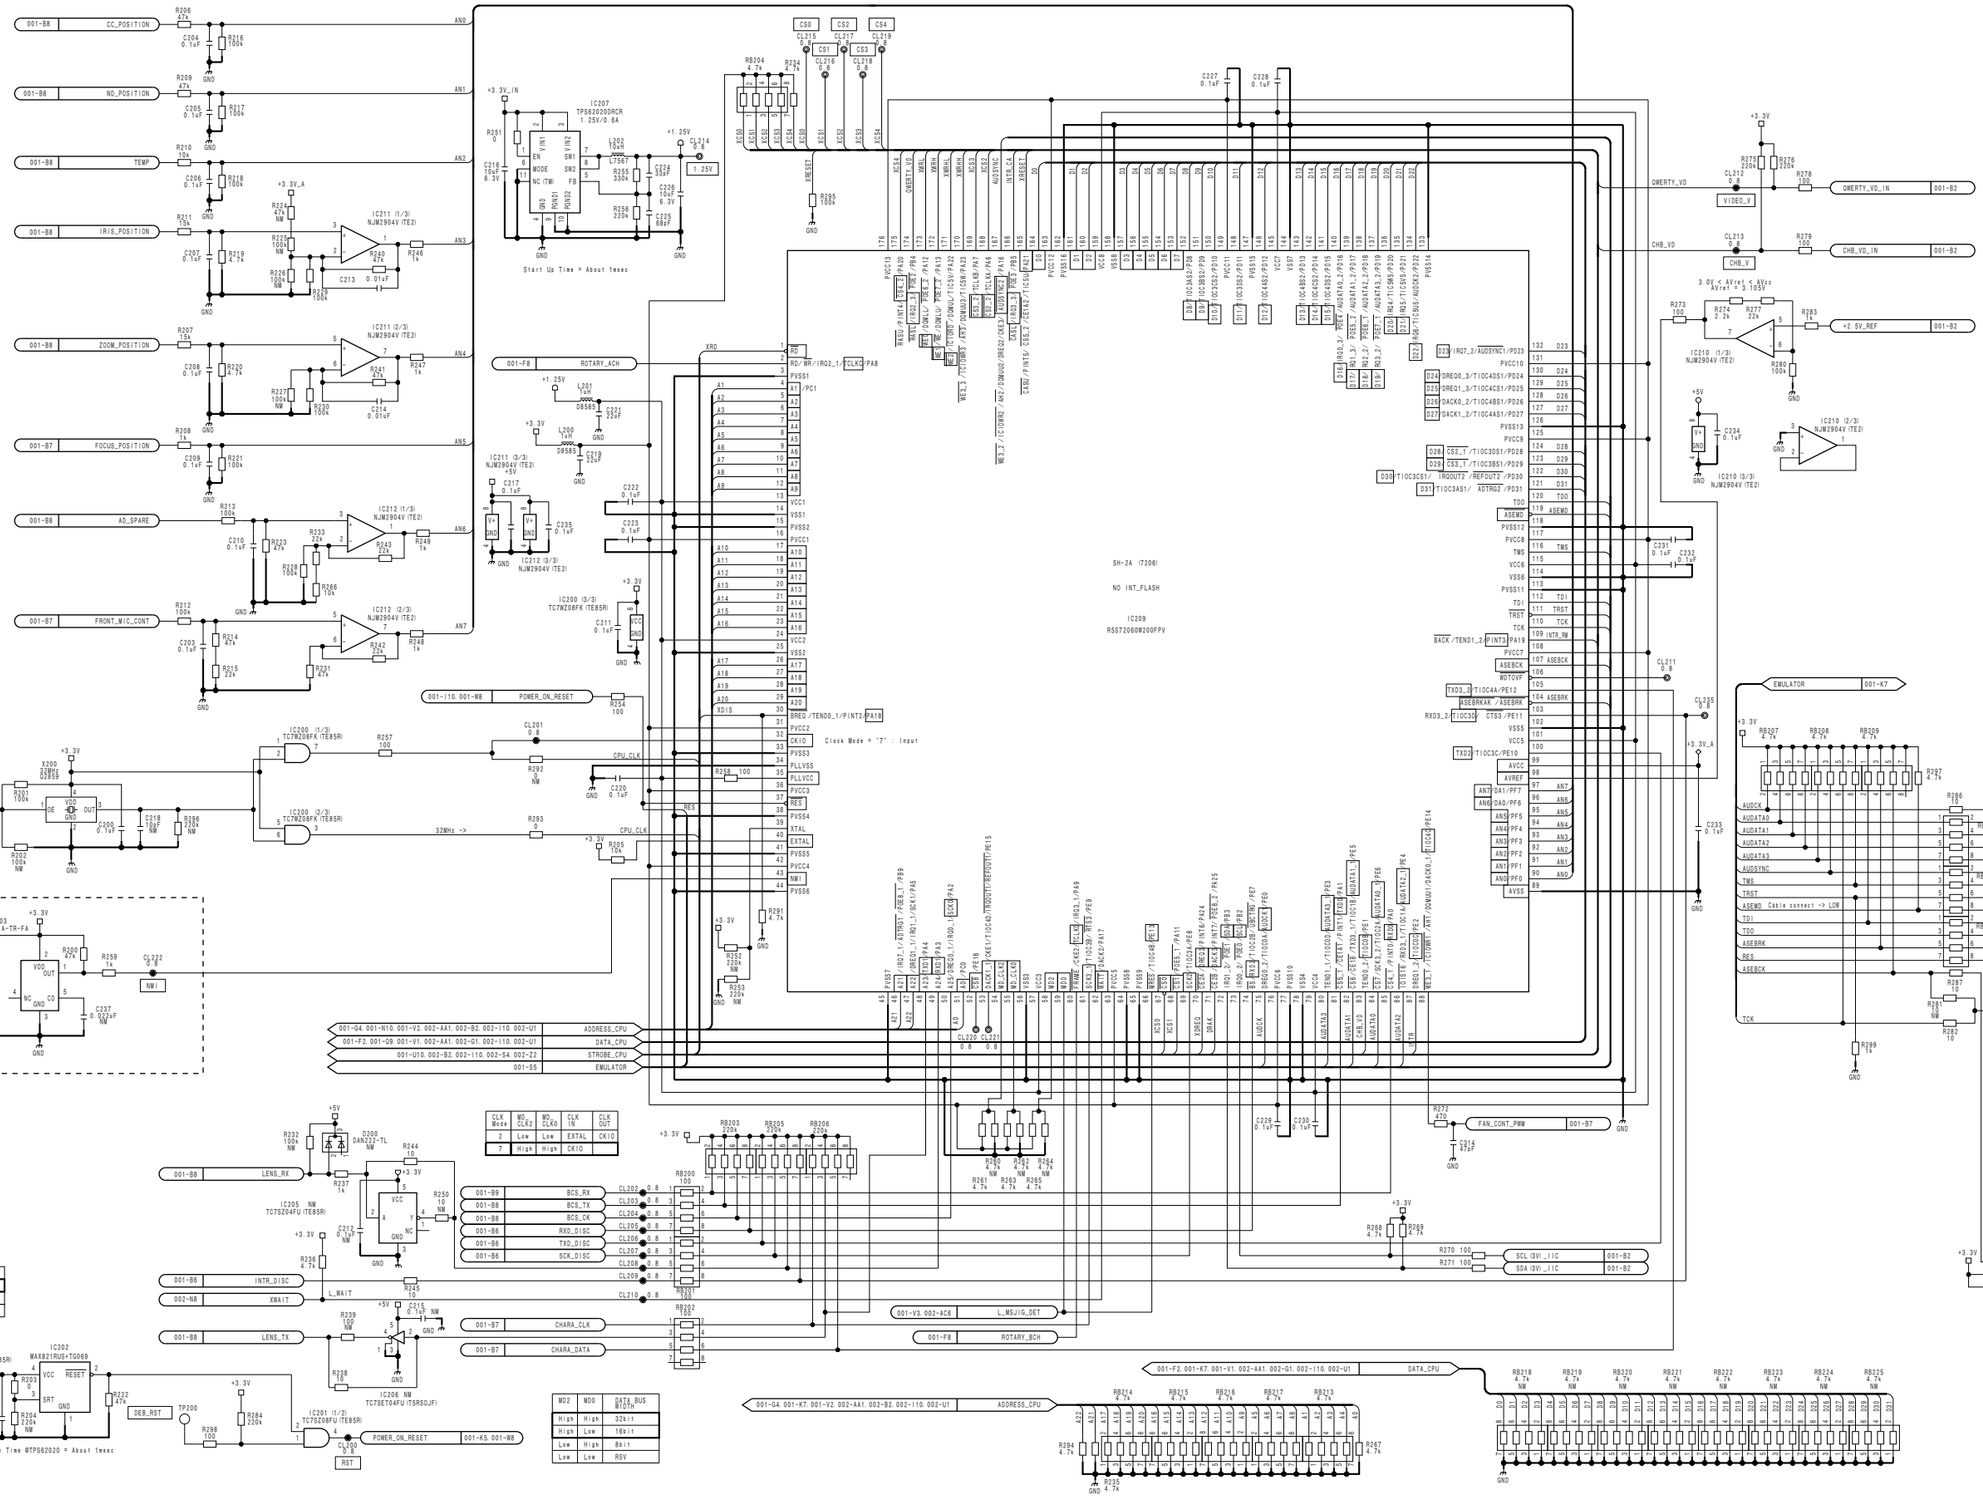


AT-177 (1/2)
BOARD NO. 1-876-845-12
VCX-434_AT-177_012_1

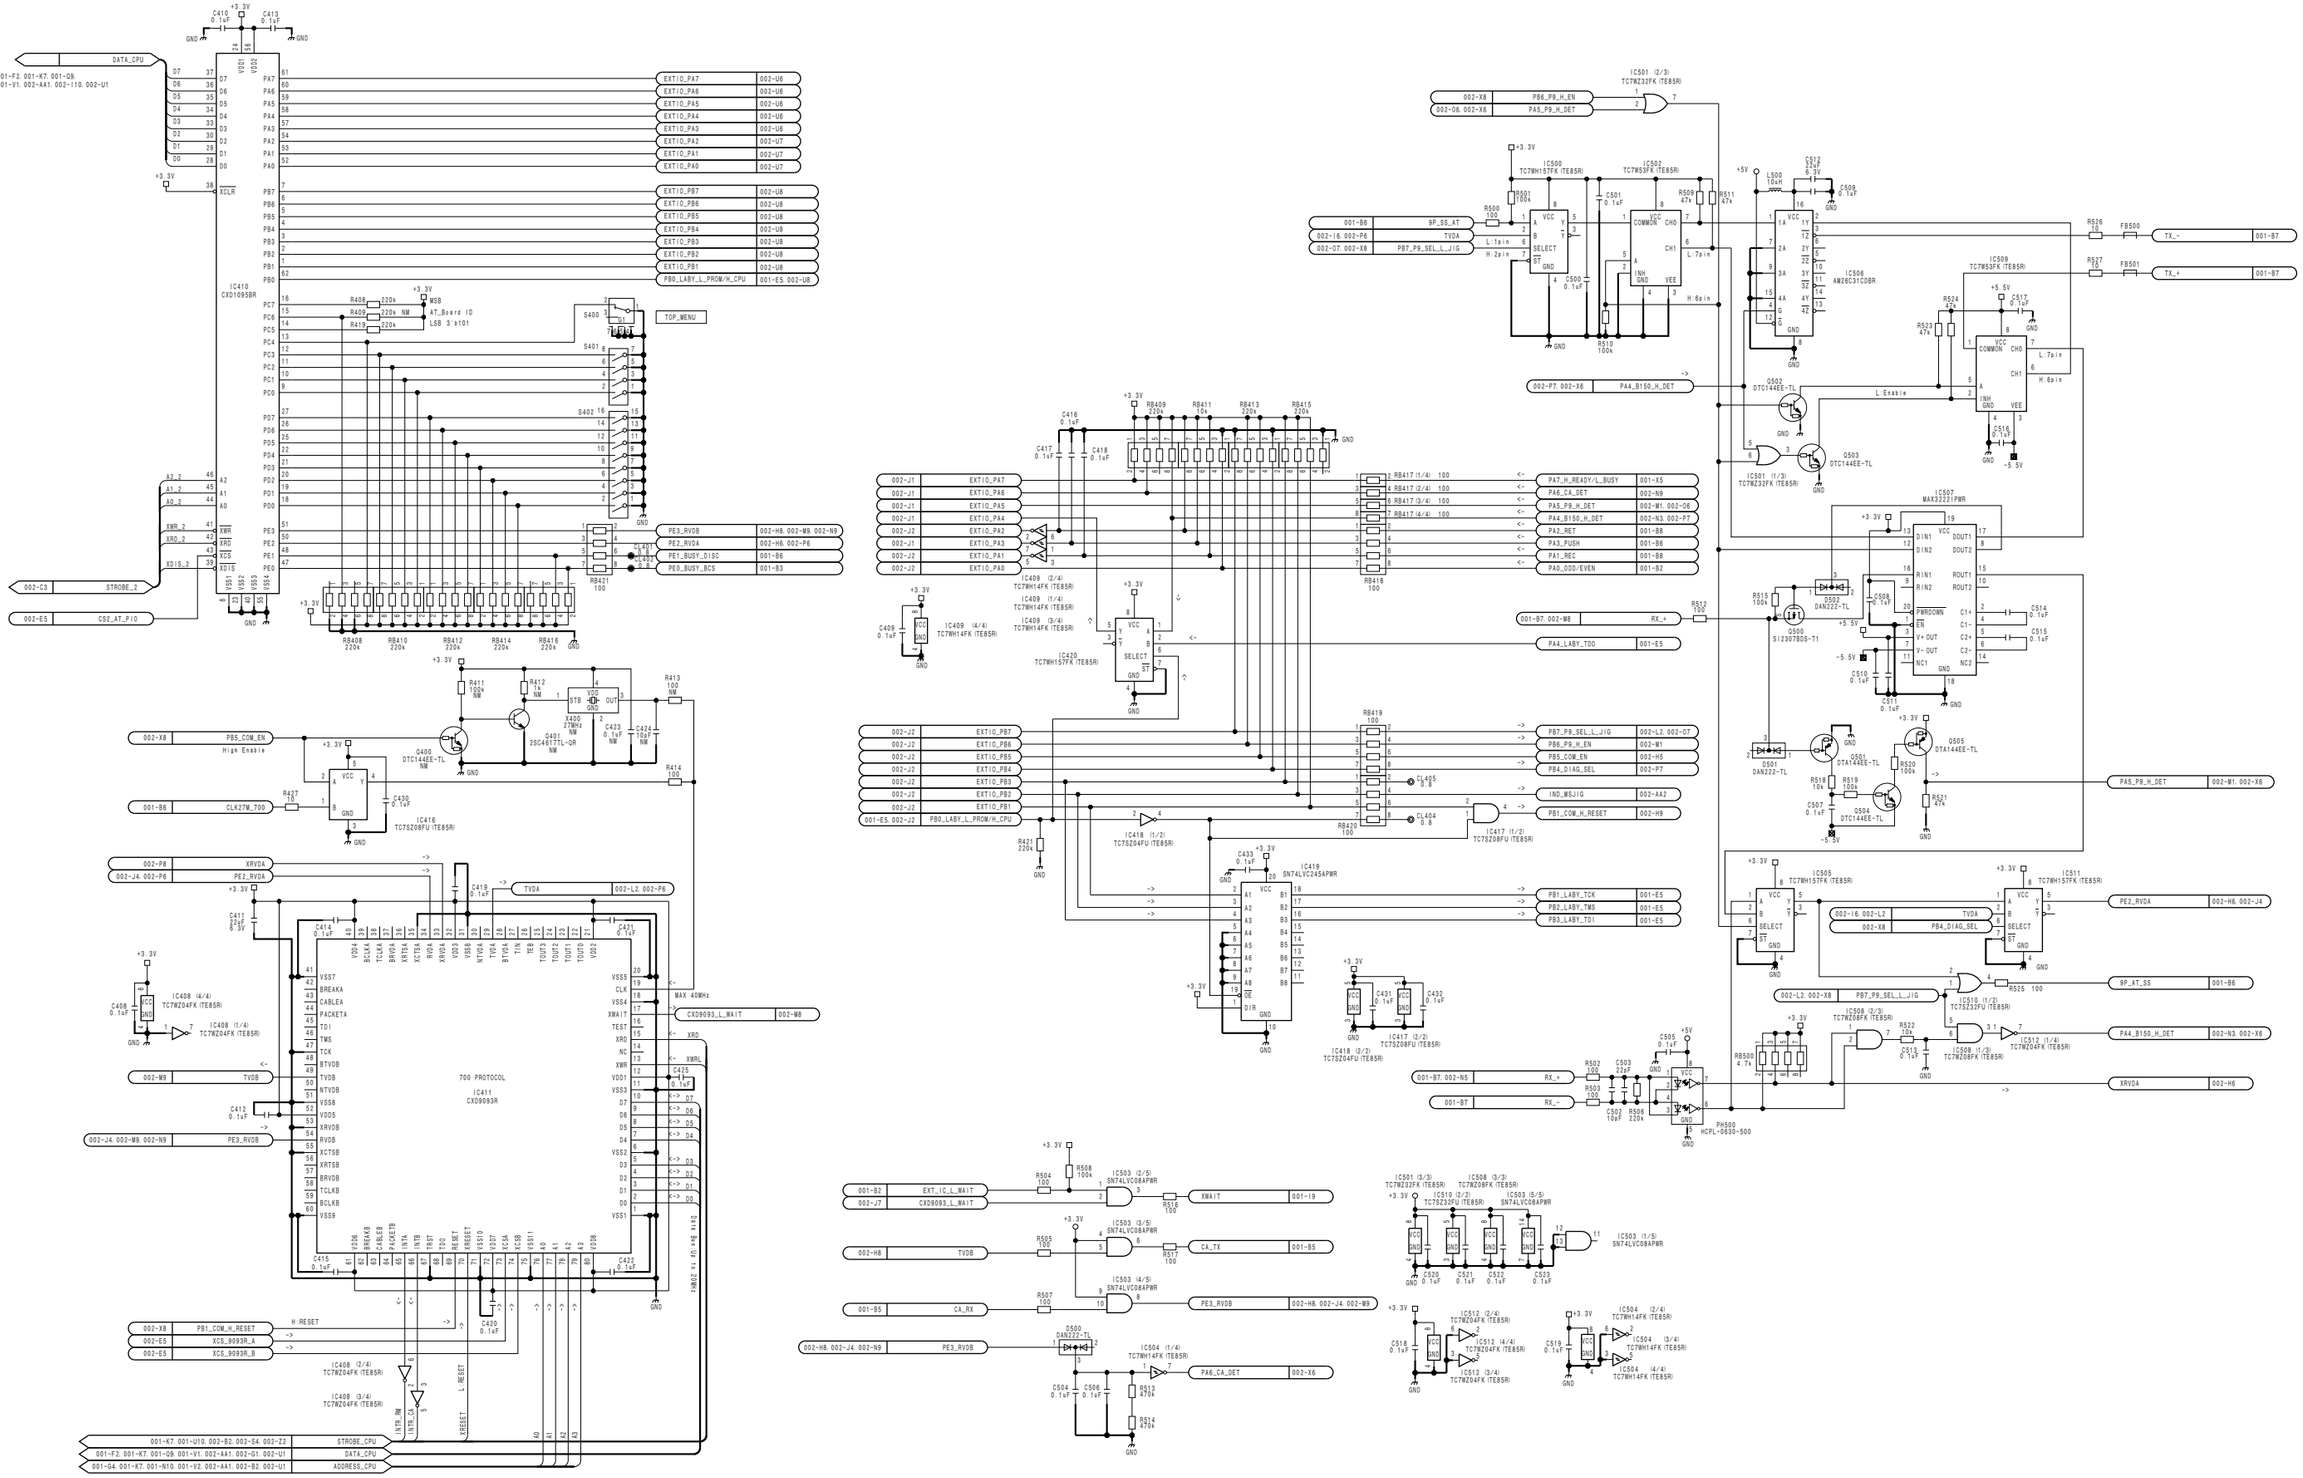
IC410 CXD1095BR
700 PROTOCOL
IC411 CXD9093R
IC501 (2/3) TC7WZ32FK (TE85R)
IC500 TC7WH157FK (TE85R)
IC502 TC7W53FK (TE85R)
IC506 AM26C31CDBR
IC509 TC7W53FK (TE85R)
IC507 MAX3222EPWR
IC505 TC7WH157FK (TE85R)
IC511 TC7WH157FK (TE85R)
IC409 (2/4) TC7WH14FK (TE85R)
IC409 (1/4) TC7WH14FK (TE85R)
IC409 (3/4) TC7WH14FK (TE85R)
IC409 (4/4) TC7WH14FK (TE85R)
IC420 TC7WH157FK (TE85R)
IC418 (1/2) TC7SZ04FU (TE85R)
IC417 (1/3) TC7SZ08FU (TE85R)
IC419 SN74LVC245APWR
IC418 (2/2) TC7SZ04FU (TE85R)
IC417 (2/3) TC7SZ08FU (TE85R)
IC408 (4/4) TC7WZ04FK (TE85R)
IC408 (1/4) TC7WZ04FK (TE85R)
IC408 (2/4) TC7WZ04FK (TE85R)
IC408 (3/4) TC7WZ04FK (TE85R)
IC416 TC7SZ08FU (TE85R)
IC503 (2/5) SN74LVC08APWR
IC503 (3/5) SN74LVC08APWR
IC503 (4/5) SN74LVC08APWR
IC503 (5/5) SN74LVC08APWR
IC503 (1/5) SN74LVC08APWR
IC504 (1/4) TC7WH14FK (TE85R)
IC504 (2/4) TC7WH14FK (TE85R)
IC504 (3/4) TC7WH14FK (TE85R)
IC504 (4/4) TC7WH14FK (TE85R)
IC512 (2/4) TC7WZ04FK (TE85R)
IC512 (4/4) TC7WZ04FK (TE85R)
IC512 (3/4) TC7WZ04FK (TE85R)
IC501 (3/3) TC7WZ32FK (TE85R)
IC508 (3/3) TC7WZ08FK (TE85R)
IC510 (2/2) TC7SZ32FU (TE85R)
IC503 (5/5) SN74LVC08APWR
IC508 (2/3) TC7WZ08FK (TE85R)
IC508 (1/3) TC7WZ08FK (TE85R)
IC512 (1/4) TC7WZ04FK (TE85R)
IC510 (1/2) TC7SZ32FU (TE85R)
IC501 (1/3) TC7WZ32FK (TE85R)
Q400 DTC144EE-TL
Q401 2SC4617TL-QR
Q500 SI2307BDS-T1
Q501 DTA144EE-TL
Q502 DTC144EE-TL
Q503 DTC144EE-TL
Q504 DTC144EE-TL
Q505 DTA144EE-TL
D500 DAN222-TL
D501 DAN222-TL
D502 DAN222-TL
PH500 HCPL-0630-500
S400
S401
S402
DATA_CPU
STROBE_2
CS2_AT_PIO
TOP_MENU
PE3_RVDB
PE2_RVDA
PE1_BUSY_DISC
PE0_BUSY_BCS
AT_Board ID
LSB 3'b101
PB5_COM_EN
High Enable
CLK27M_700
XRVDA
TVDA
MAX 40MHz
CXD9093_L_WAIT
XRD
XWRL
H:RESET
XCS_9093R_A
XCS_9093R_B
L_RESET
STROBE_CPU
DATA_CPU
ADDRESS_CPU
EXT_IC_L_WAIT
CXD9093_L_WAIT
XWAIT
CA_TX
CA_RX
PE3_RVDB
PA6_CA_DET
PB6_P9_H_EN
PA5_P9_H_DET
PB5_COM_EN
PB4_DIAG_SEL
PB7_P9_SEL_L_JIG
PB1_COM_H_RESET
IND_WSJIG
PB1_LABY_TCK
PB2_LABY_TMS
PB3_LABY_TDI
9P_AT_SS
TX_-
TX_+
RX_+
RX_-
PA7_H_READY/L_BUSY
PA6_CA_DET
PA5_P9_H_DET
PA4_B150_H_DET
PA3_RET
PA3_PUSH
PA1_REC
PA0_ODD/EVEN
PA4_LABY_TDO
L:Enable

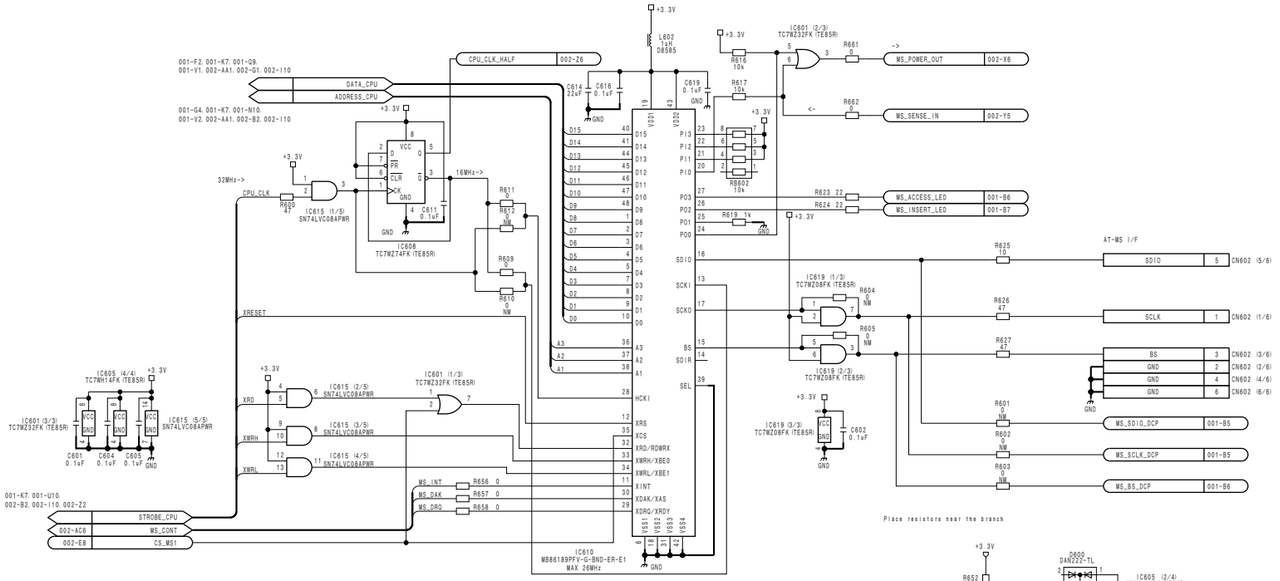


AT-177 (2/2)
BOARD NO. 1-876-845-12
VCX-434_AT-177_012_2

AXM-38
BOARD NO. 1-877-156-13
PDW-700_AXM-38_013_1

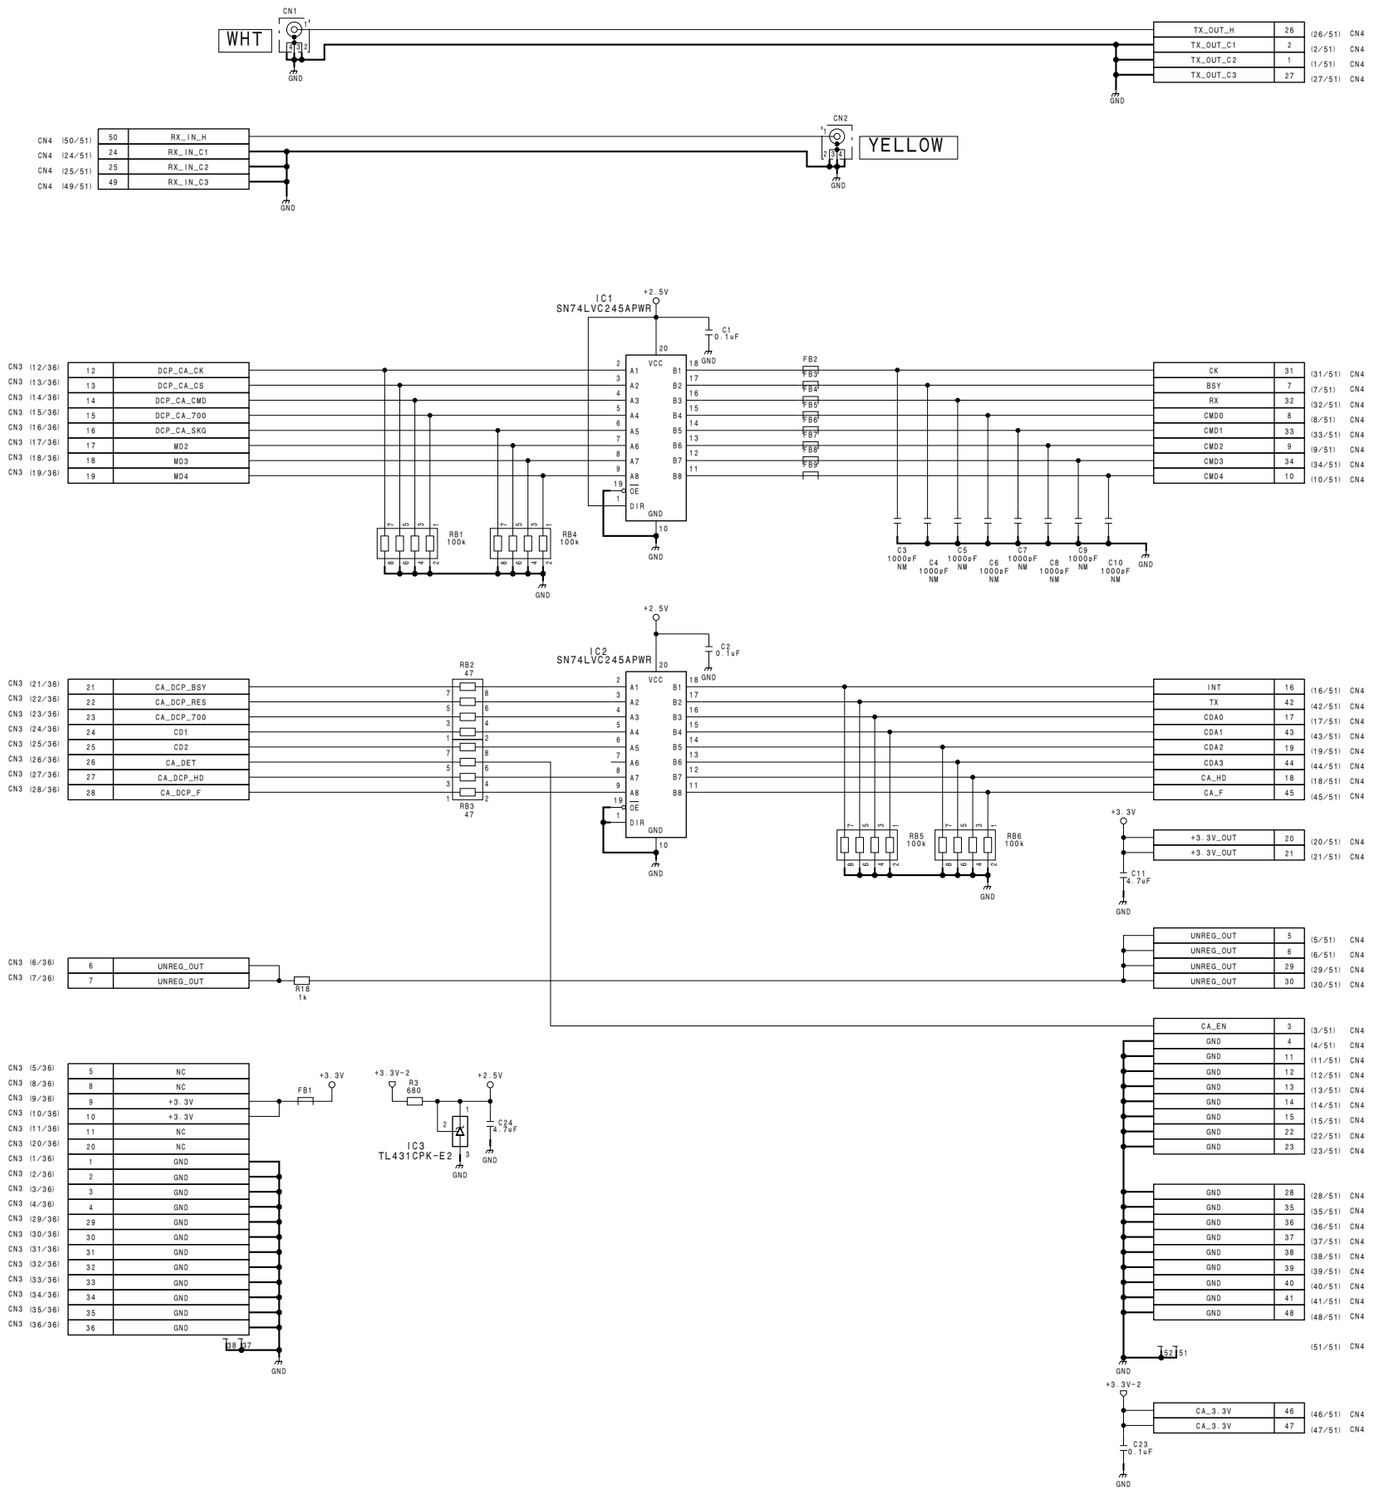


CI-37
BOARD NO. 1-876-851-12
PDW-700_CI-37_012_1

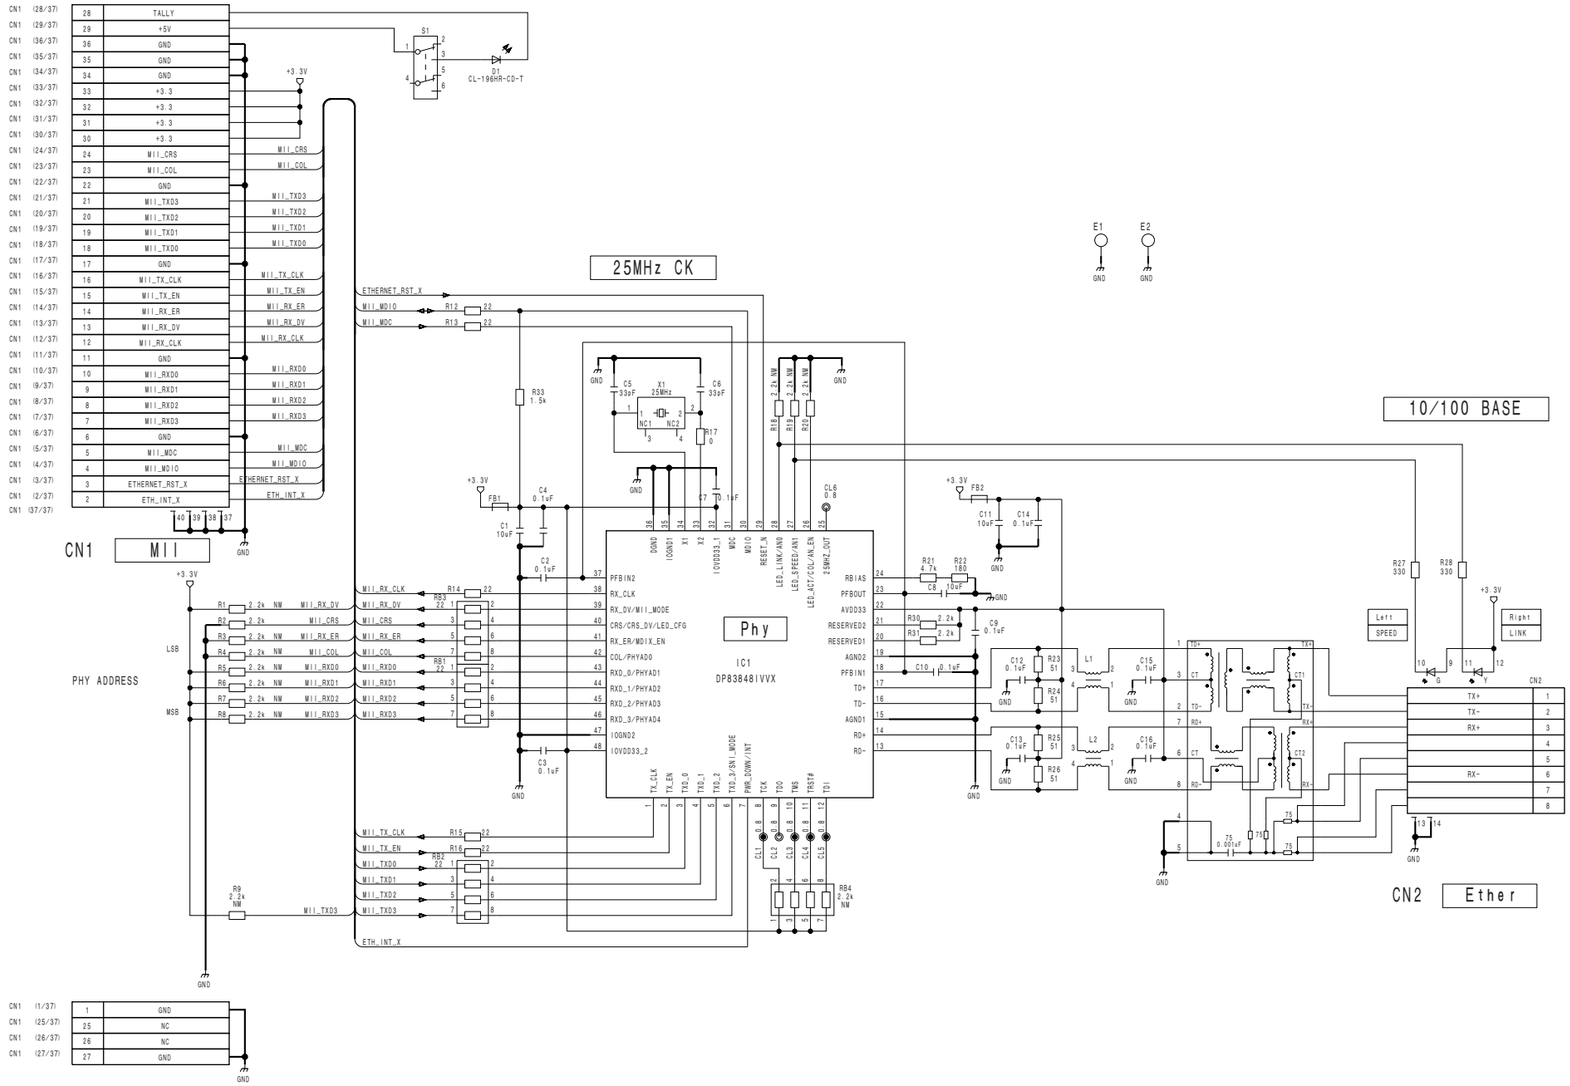

CN-2946
BOARD NO. 1-876-849-11
VCX-434_CN-2946_011_1


PDW-F800/V2 (J,E)

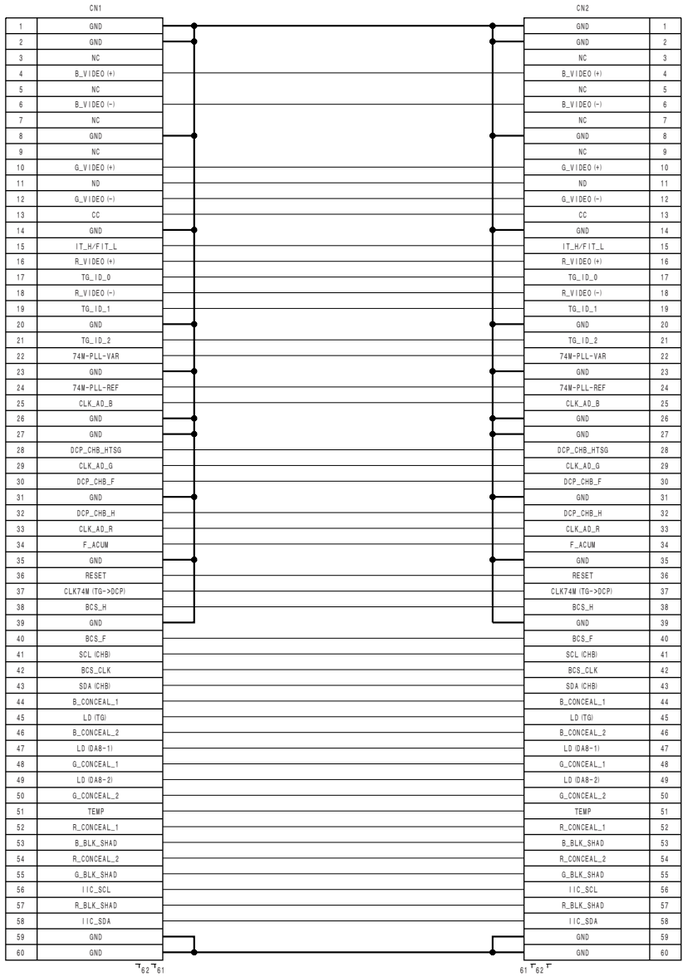

CN-2947

BOARD NO. 1-876-785-11


VCX-434_CN-2947_003_1

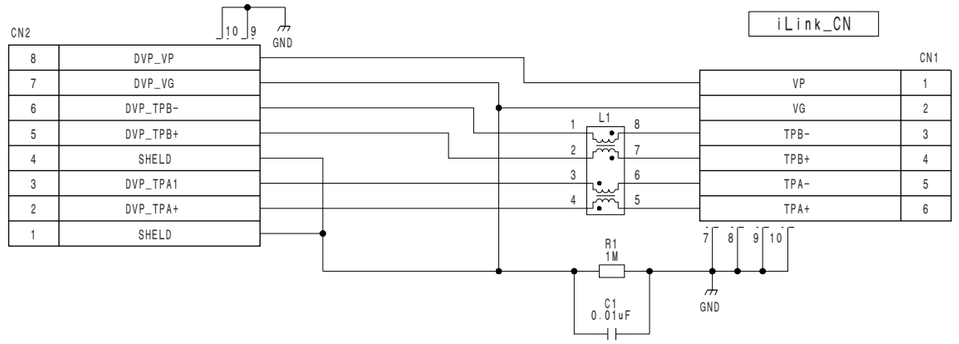

CN-2948

BOARD NO. 1-876-826-11


VCX-434_CN-2948_011_1

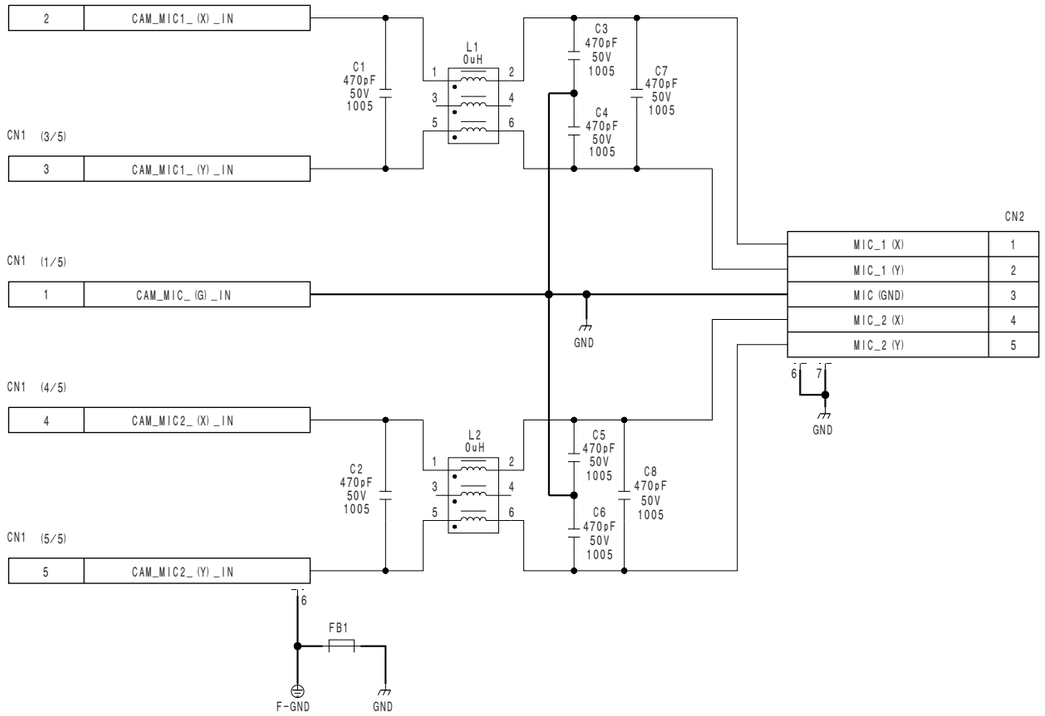

CN-3001


BOARD NO. 1-876-829-11

VCX-434_CN-3001_011_1

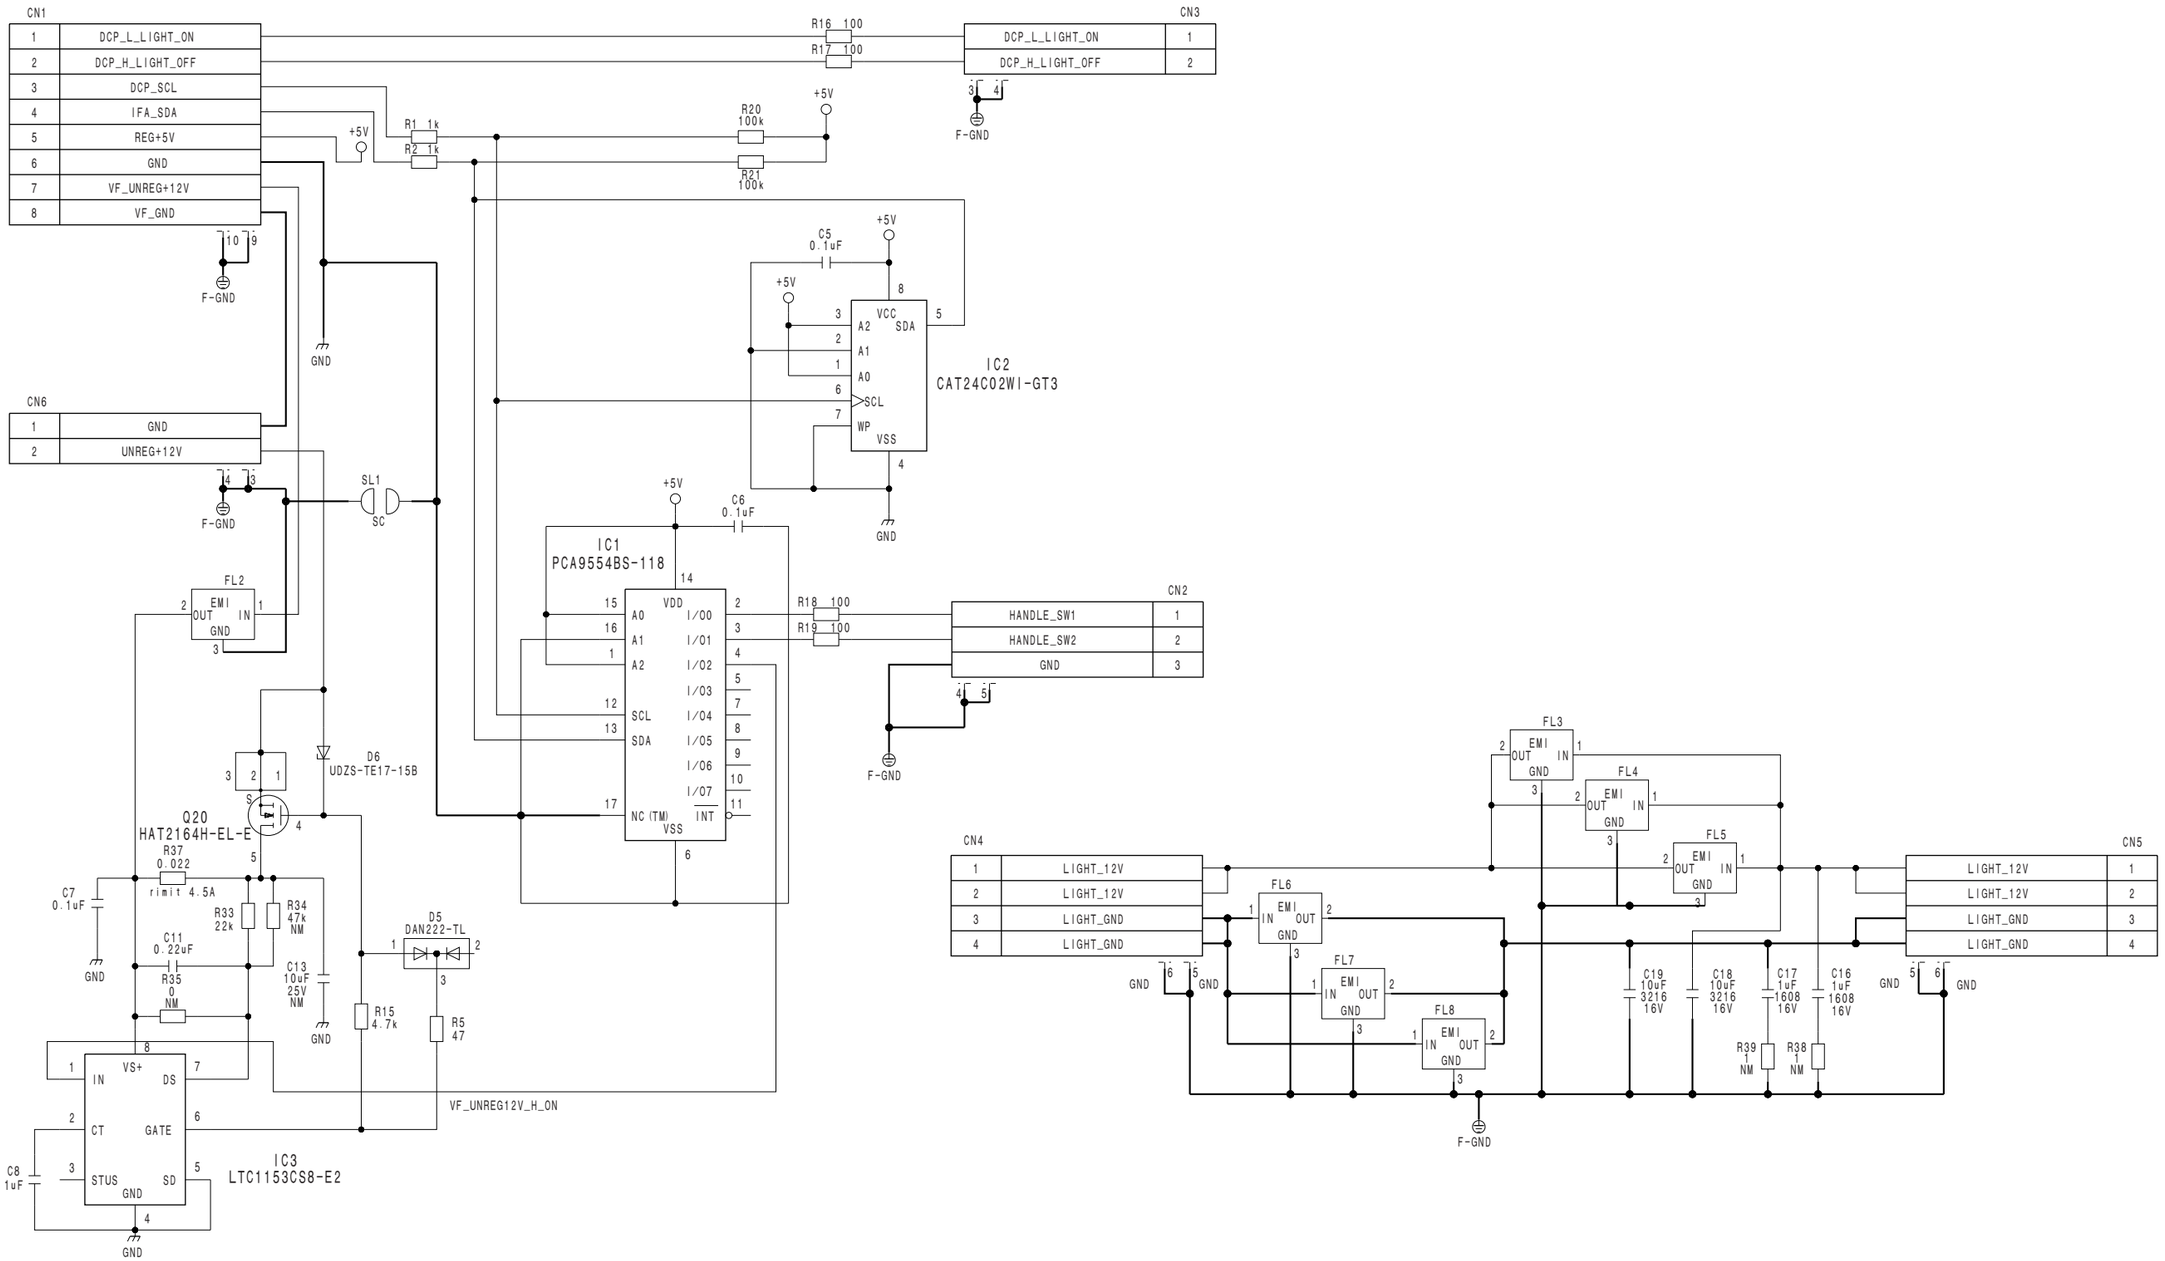

CN-3005
BOARD NO. 1-876-830-12
VCX-434_CN-3005_012_1


CN-3025, CN-3026
SUFFIX: -11 SUFFIX: -11

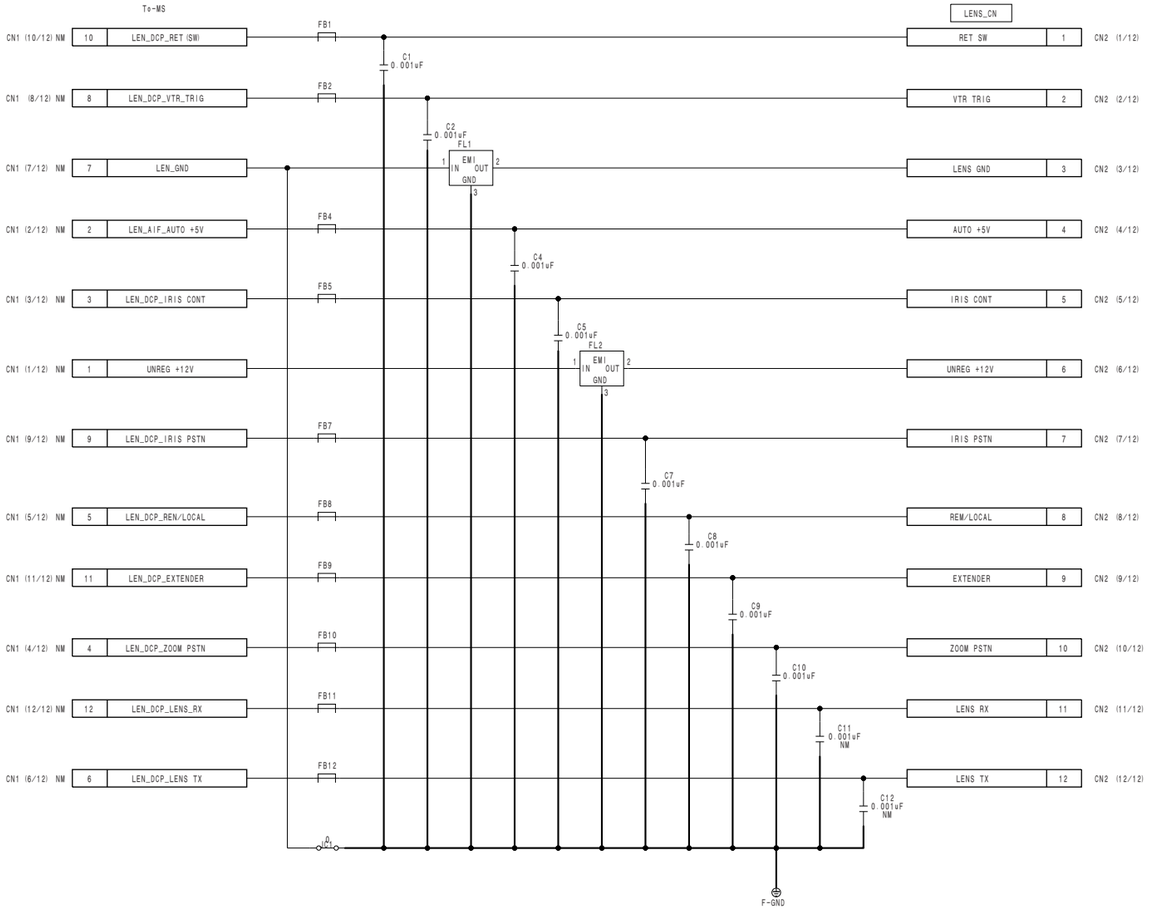

CN-3025

BOARD NO. 1-876-837-11

VCX-434_CN-3025_011_1

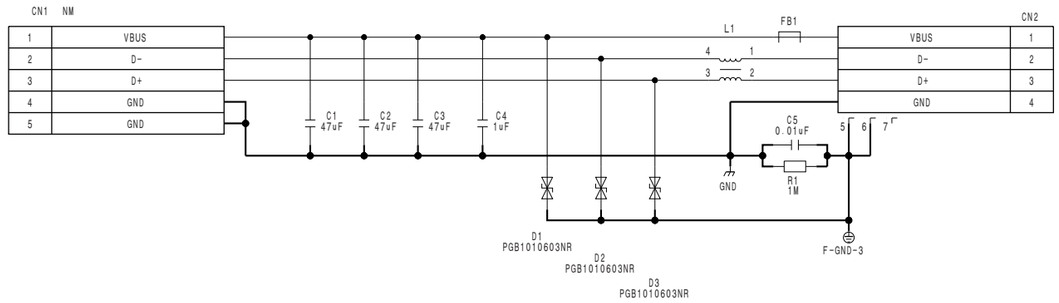


CN-3026


BOARD NO. 1-876-838-11

VCX-434_CN-3026_011_1


CNB-25 (1/4)
SUFFIX: -11

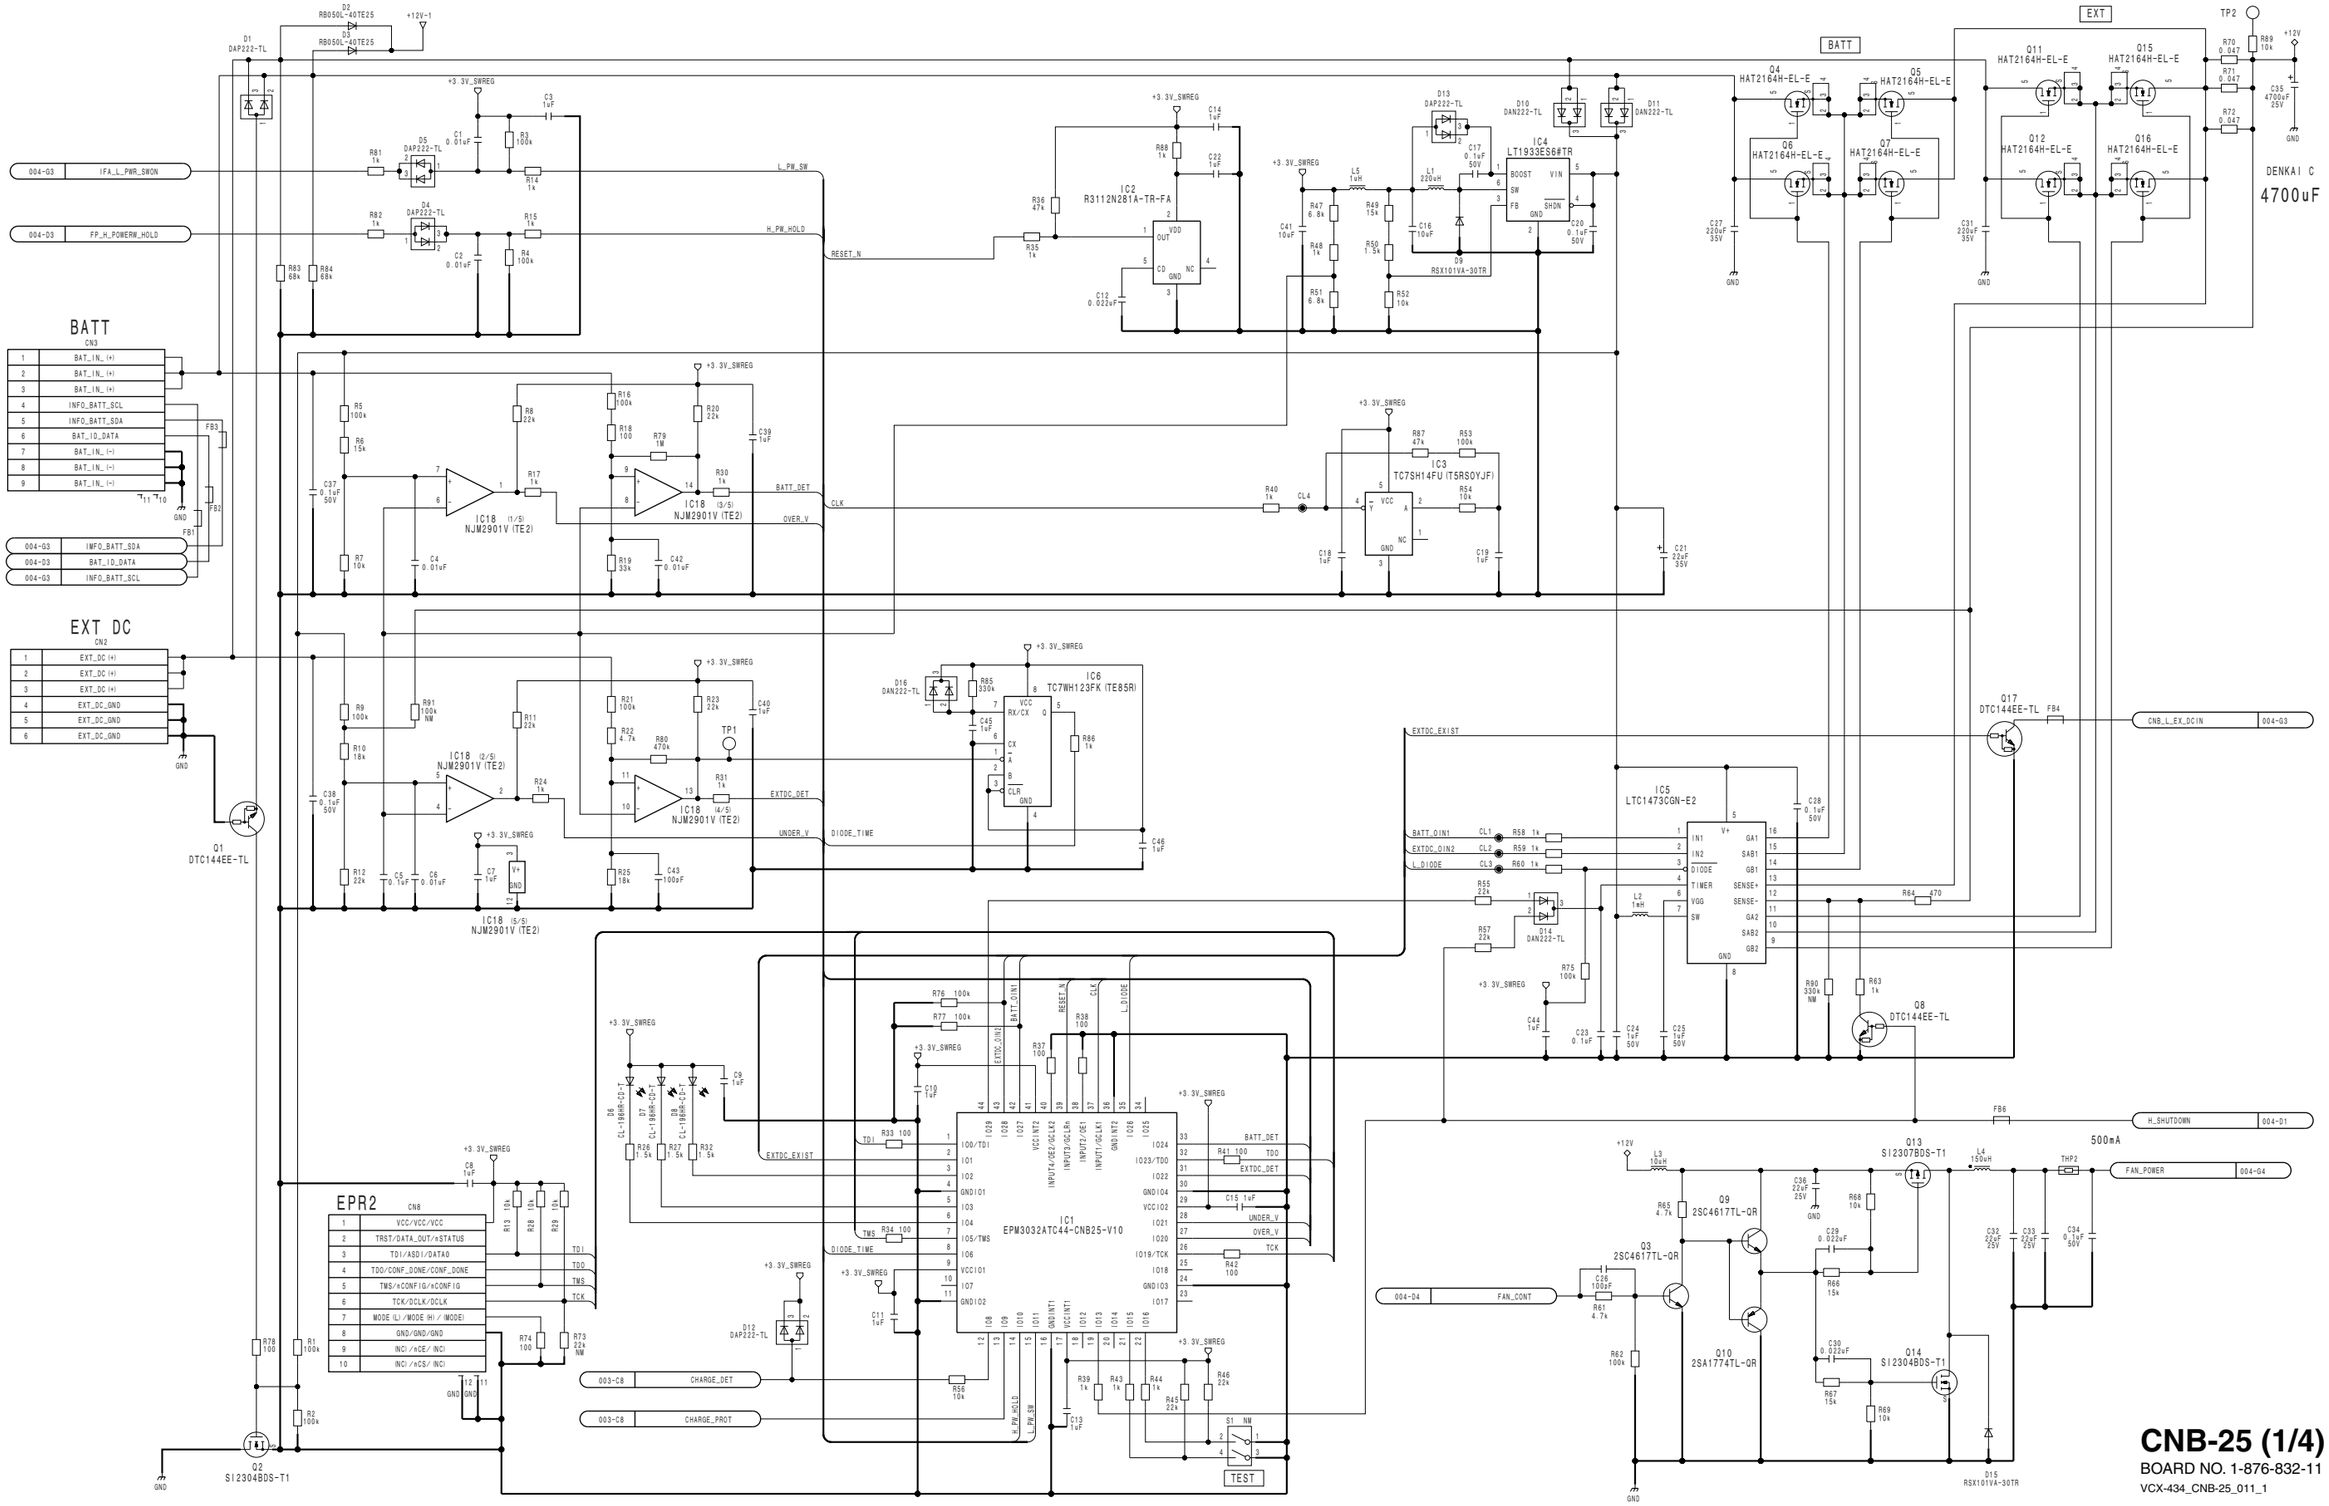

CNB-25 (1/4)
BOARD NO. 1-876-832-11
VCX-434_CNB-25_011_1

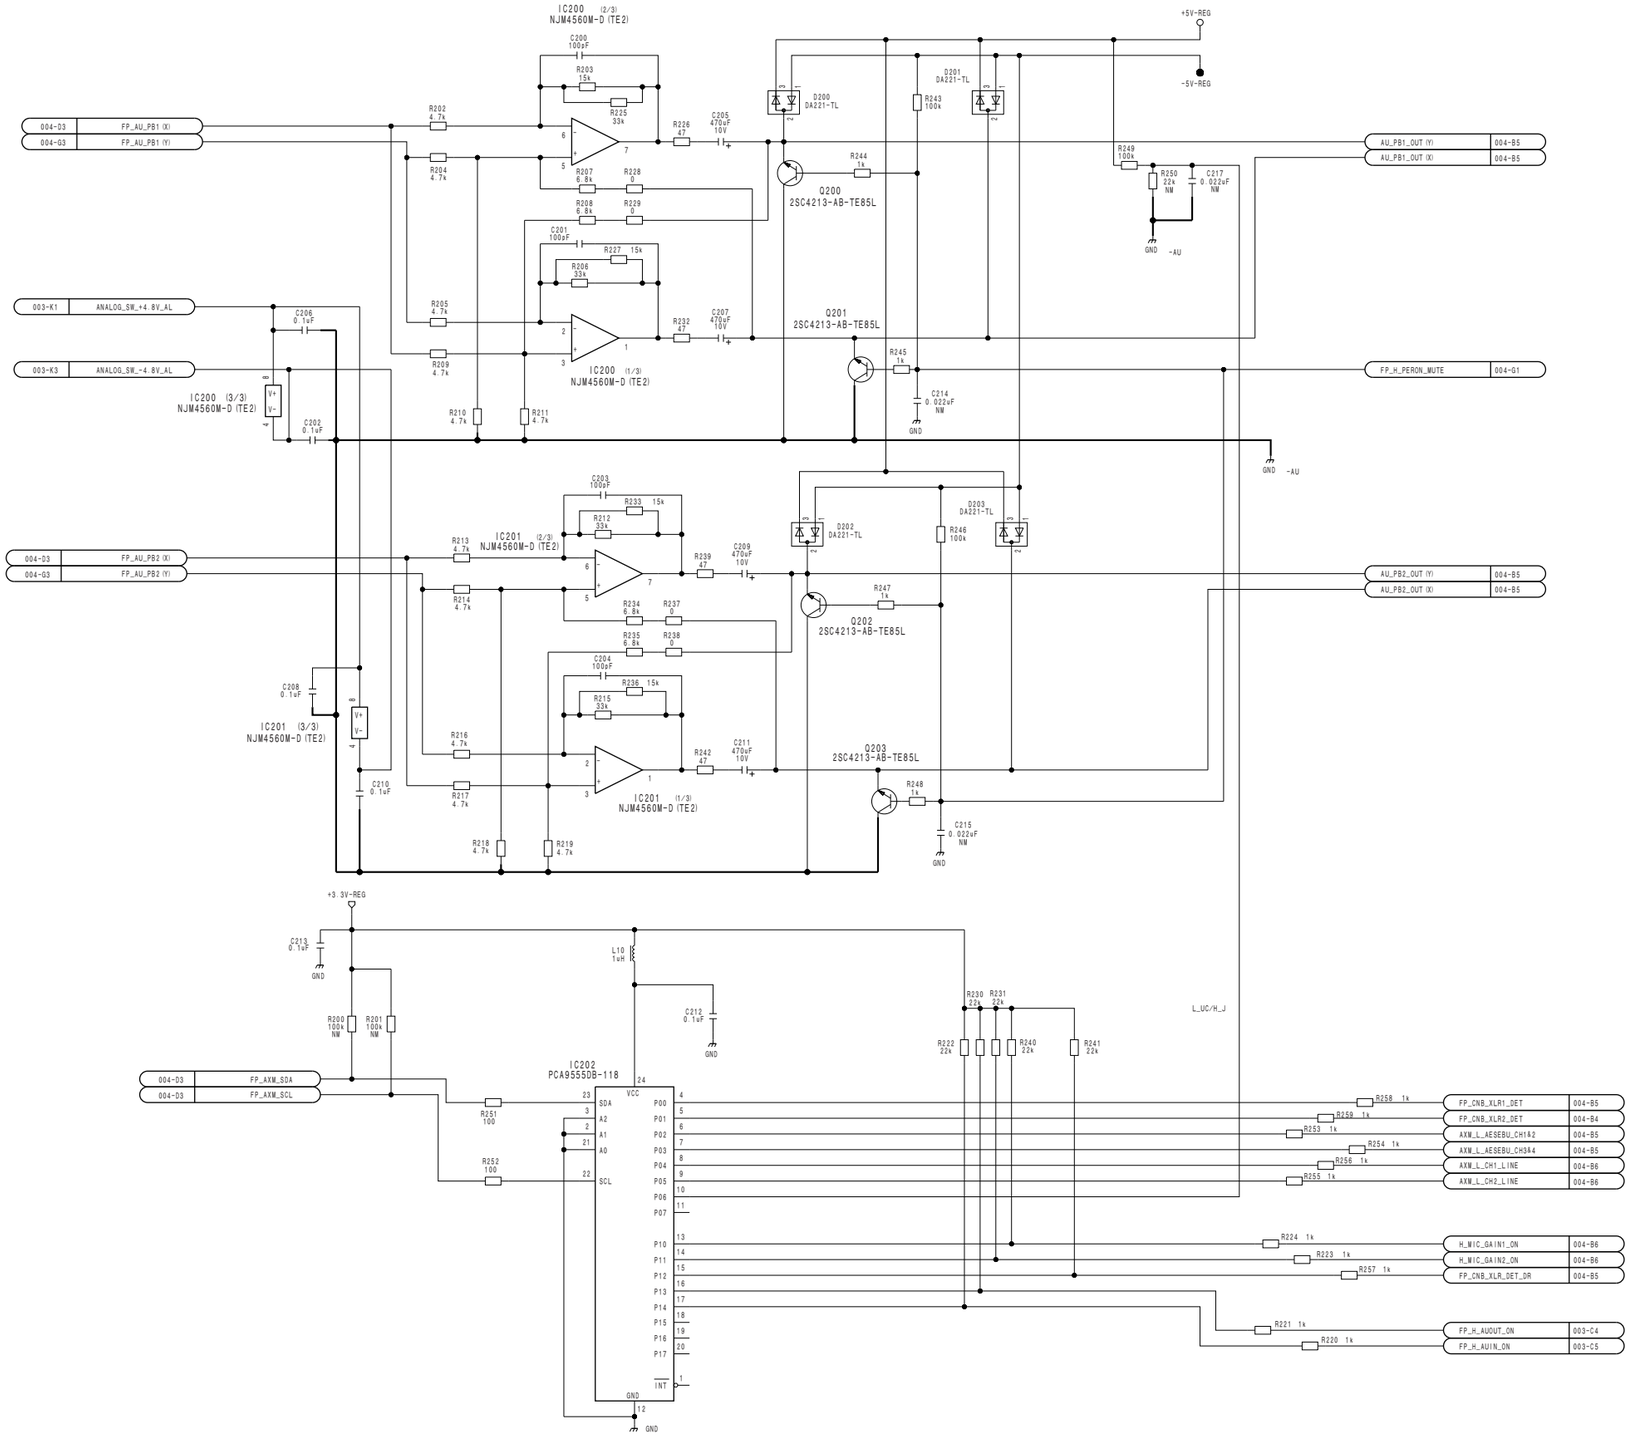

CNB-25 (2/4)
BOARD NO. 1-876-832-11
VCX-434_CNB-25_011_2

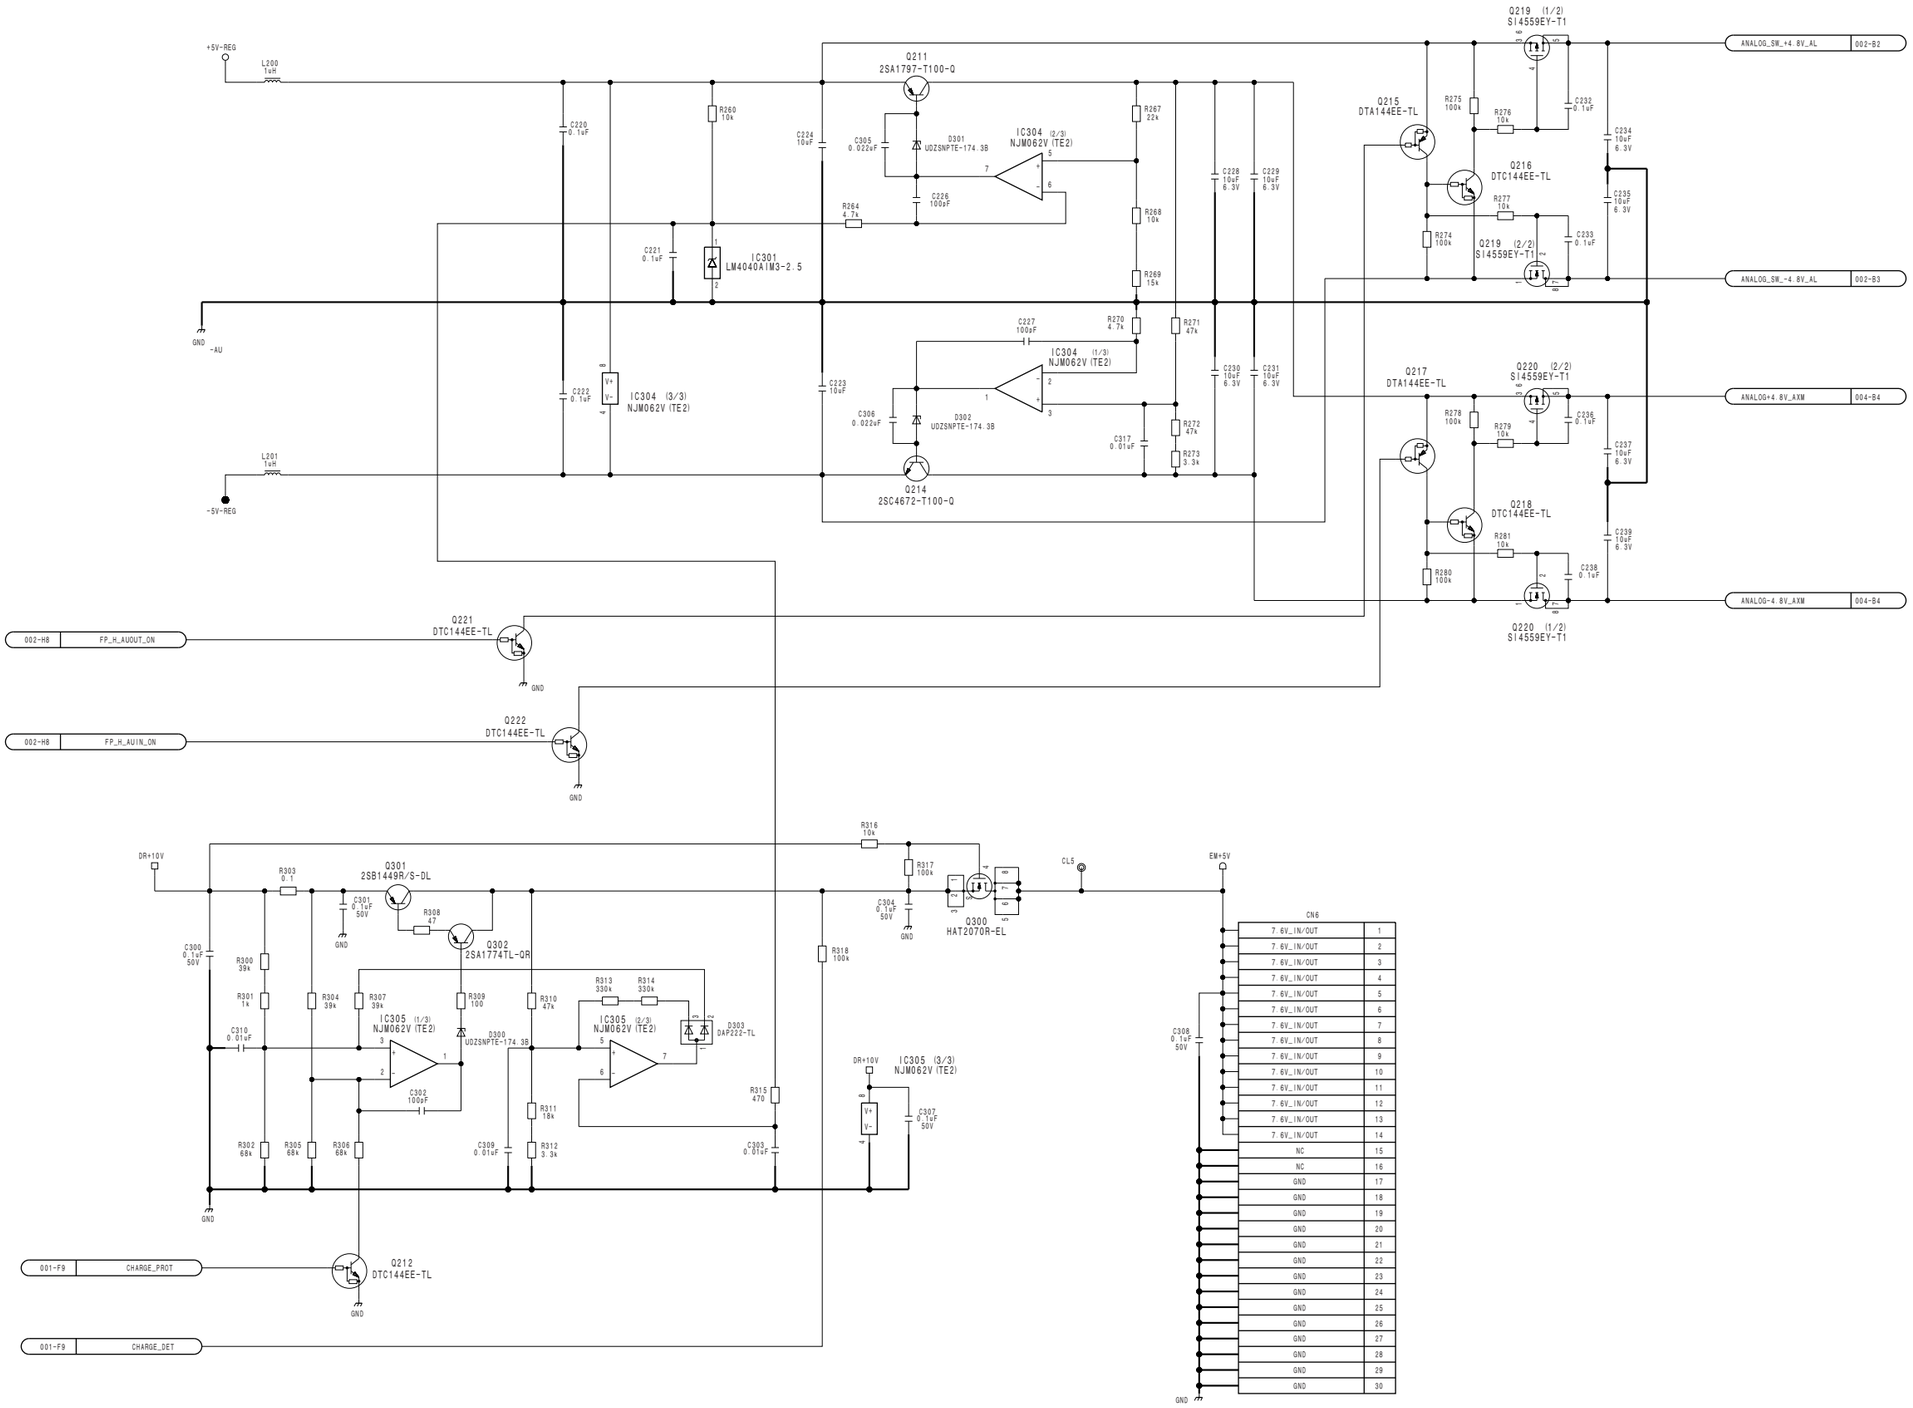

CNB-25 (3/4)
BOARD NO. 1-876-832-11
VCX-434_CNB-25_011_3

CNB-25 (4/4) **SUFFIX: -11**

LIGHT

CN5

1	LIGHT_UNREG			
2	LIGHT_UNREG			
3	UNREG_GND			
4	UNREG_GND			
5	DCP_H_LIGHT_OFF	FB8	DCP_H_LIGHT_OFF	004-G4
6	LIGHT_OFF			
7	REG_+5V			

9 8

+12V, +5V-REG, FB5, GND

DCOUT

CN4

1	UNREG_+12V	500mA THP1	+12V	
2	UNREG_GND	C90 0.1uF 50V	GND	

4 3

AXM

CN7

1	CH1_MIC/LINE (X)		AXM_CH1_MIC/LINE (X)	004-G3
2	CH1_MIC/LINE (Y)		AXM_CH1_MIC/LINE (Y)	004-D4
3	CH1_MIC/LINE (G)		AXM_MIC/LINE (G)	004-D4, 004-G4
4	CH2_MIC/LINE (X)		AXM_CH2_MIC/LINE (X)	004-D4
5	CH2_MIC/LINE (Y)		AXM_CH2_MIC/LINE (Y)	004-G4
6	ANALOG+4.8V_AXM		ANALOG+4.8V_AXM	003-K3
7	GND (AU)			
8	ANALOG-4.8V_AXM	+48V	ANALOG-4.8V_AXM	003-K4
9	REG+48V			
10	FP_CNB_XLR2_DET		FP_CNB_XLR2_DET	002-H7
11	FP_CNB_XLR1_DET		FP_CNB_XLR1_DET	002-H7
12	FP_CNB_XLR_DET_DR	+5V-REG	FP_CNB_XLR_DET_DR	002-H8
13	REG+5V			
14	DCP_L_BACK_TALLY		DCP_L_BACK_TALLY	004-G4
15	CNB_TALLY_VCC		CNB_TALLY_VCC	004-D4
16	AU_PB_OUT (X)		AU_PB1_OUT (X)	002-H2
17	AU_PB_OUT (Y)		AU_PB1_OUT (Y)	002-H2
18	AU_PB_OUT (G)	GND -AU		
19	AU_PB2_OUT (X)		AU_PB2_OUT (X)	002-H4
20	AU_PB2_OUT (Y)		AU_PB2_OUT (Y)	002-H4
21	AXM_L_AESEBU_CH1&2		AXM_L_AESEBU_CH1&2	002-H7
22	AXM_L_AESEBU_CH3&4		AXM_L_AESEBU_CH3&4	002-H7
23	AES/EBU_LCH1&2		AES/EBU_L_CH1&2	004-G4
24	GND (D)		GND_D2	004-D4
25	AES/EBU_LCH3&4		AES/EBU_L_CH3&4	004-G4
26	GND (D)		GND_D1	004-D4
27	AXM_L_CH1_LINE		AXM_L_CH1_LINE	002-H7
28	AXM_L_CH2_LINE		AXM_L_CH2_LINE	002-H7
29	H_MIC_AMP10dB		H_MIC_GAIN1_ON	002-H7
30	H_MIC_AMP20dB		H_MIC_GAIN2_ON	002-H8

34 33 32 31

MB

CN1

001-N7	H_SHUTDOWN	+5V-REG	H_SHUTDOWN	1	2	FP_H_PWRON_MUTE	FP_H_PERON_MUTE	002-H3
			REG_+5V	3	4	REG_-5V	-5V-REG	
		GND	GND	5	6	GND		
			GND	7	8	GND		
			GND	9	10	GND		
			GND	11	12	GND	GND	
			GND	13	14	GND	+48V	
			GND	15	16	GND		
			GND	17	18	REG_+48V		
		+12V	UNREG_+12V	19	20	UNREG_+12V	+12V	
			UNREG_+12V	21	22	UNREG_+12V		
			UNREG_+12V	23	24	UNREG_+12V		
			UNREG_+12V	25	26	UNREG_+12V		
			UNREG_+12V	27	28	UNREG_+12V		
			UNREG_+12V	29	30	UNREG_+12V		
		+12V-1	UNREG_+12V	31	32	UNREG_+12V		
			UNSW_+12V	33	34	IFA_L_PWR_SWON	IFA_L_PWR_SWON	001-B2
			UNSW_+12V	35	36	CNB_L_EX_DCIN	CNB_L_EX_DCIN	001-N5
001-B2	FP_H_POWERW_HOLD		FP_H_PWR_HOLD	37	38	FP_AU_PB1 (Y)	FP_AU_PB1 (Y)	002-B2
002-B2	FP_AU_PB1 (X)		FP_AU_PB1 (X)	39	40	GND		
			FP_AU_PB1 (G)	41	42	FP_AU_PB2 (Y)	FP_AU_PB2 (Y)	002-B4
002-B4	FP_AU_PB2 (X)		FP_AU_PB2 (X)	43	44	GND		
		GND -AU	FP_AU_PB2 (G)	45	46	GND		
			GND	47	48	INFO_BATT_SDA	IMFO_BATT_SDA	001-B3
001-B4	BAT_ID_DATA		BAT_ID_DATA	49	50	INFO_BATT_SCL	INFO_BATT_SCL	001-B4
002-B7	FP_AXM_SDA		FP_AXM_SDA	51	52	GND		
002-B7	FP_AXM_SCL		FP_AXM_SCL	53	54	GND		
			GND	55	56	AXM_CH1_MIC_LINE (X)	AXM_CH1_MIC/LINE (X)	004-B4
004-B4	AXM_CH1_MIC/LINE (Y)		AXM_CH1_MIC_LINE (Y)	57	58	AXM_CH1_MIC_LINE (G)	AXM_MIC/LINE (G)	004-B4, 004-D4
004-B4	AXM_CH2_MIC/LINE (X)		AXM_CH2_MIC_LINE (X)	59	60	AXM_CH2_MIC_LINE (Y)	+3.3V-REG AXM_CH2_MIC/LINE (Y)	004-B4
004-B4, 004-G4	AXM_MIC/LINE (G)		AXM_CH2_MIC_LINE (G)	61	62	REG_+3.3V		
004-B5	CNB_TALLY_VCC		CNB_TALLY_VCC	63	64	DCP_L_BACK_TALLY	DCP_L_BACK_TALLY	004-B5
			GND	65	66	AES/EBU_L_CH1&2	AES/EBU_L_CH1&2	004-B5
004-B6	GND_D1		GND (D)	67	68	AES/EBU_L_CH3&4	AES/EBU_L_CH3&4	004-B6
004-B6	GND_D2		GND (D)	69	70	LIGHT_CONT	DCP_H_LIGHT_OFF	004-B1
		DR+10V	DR_+10V	71	72	DR_+10V	DR+10V	
		EM+5V	DR_+10V	73	74	DR_+10V	EM+5V	
			EM_+5V	75	76	EM_+5V		
001-J8	FAN_CONT		FAN_CNT	77	78	FAN_POWER	FAN_POWER	001-N8
			GND	79	80	FAN_POWER		


81 82

GND, GND -AU, GND


CNB-25 (4/4)
BOARD NO. 1-876-832-11
VCX-434_CNB-25_011_4

DCP-49A (1/10) **SUFFIX: -11**


AT-DCP

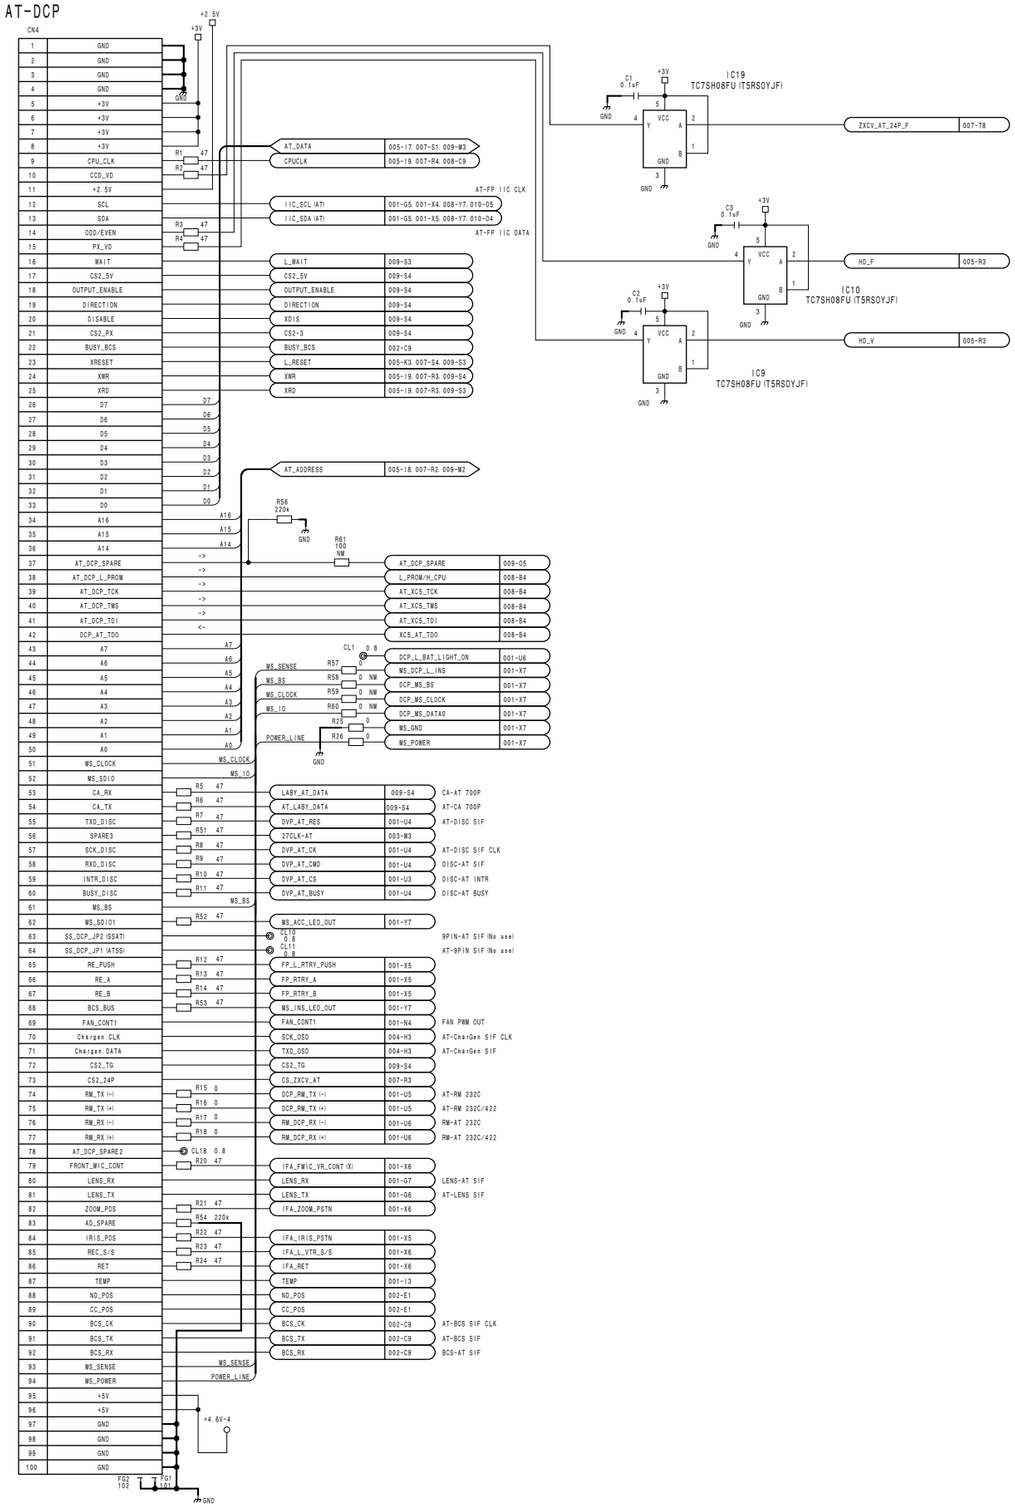


Temperature

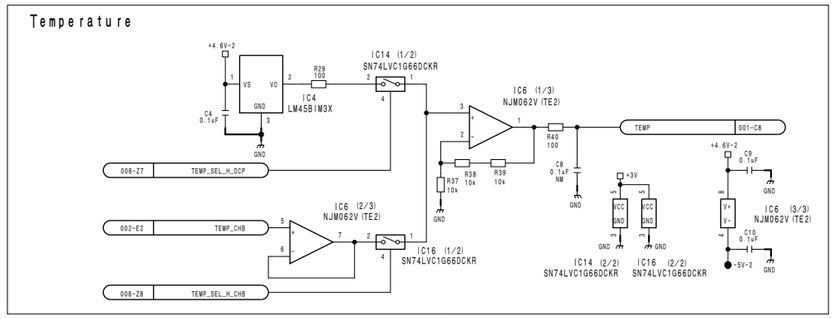


EEPROM (DCP)

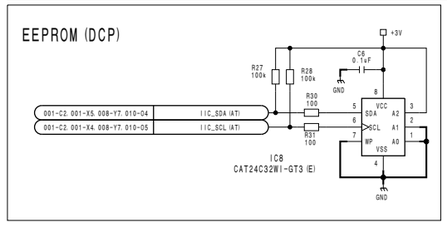

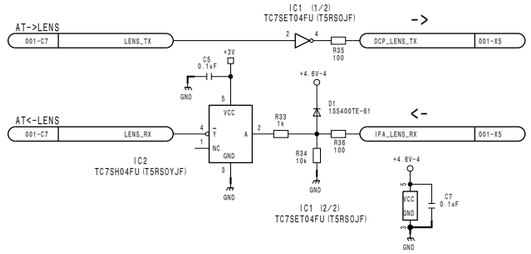


3-16

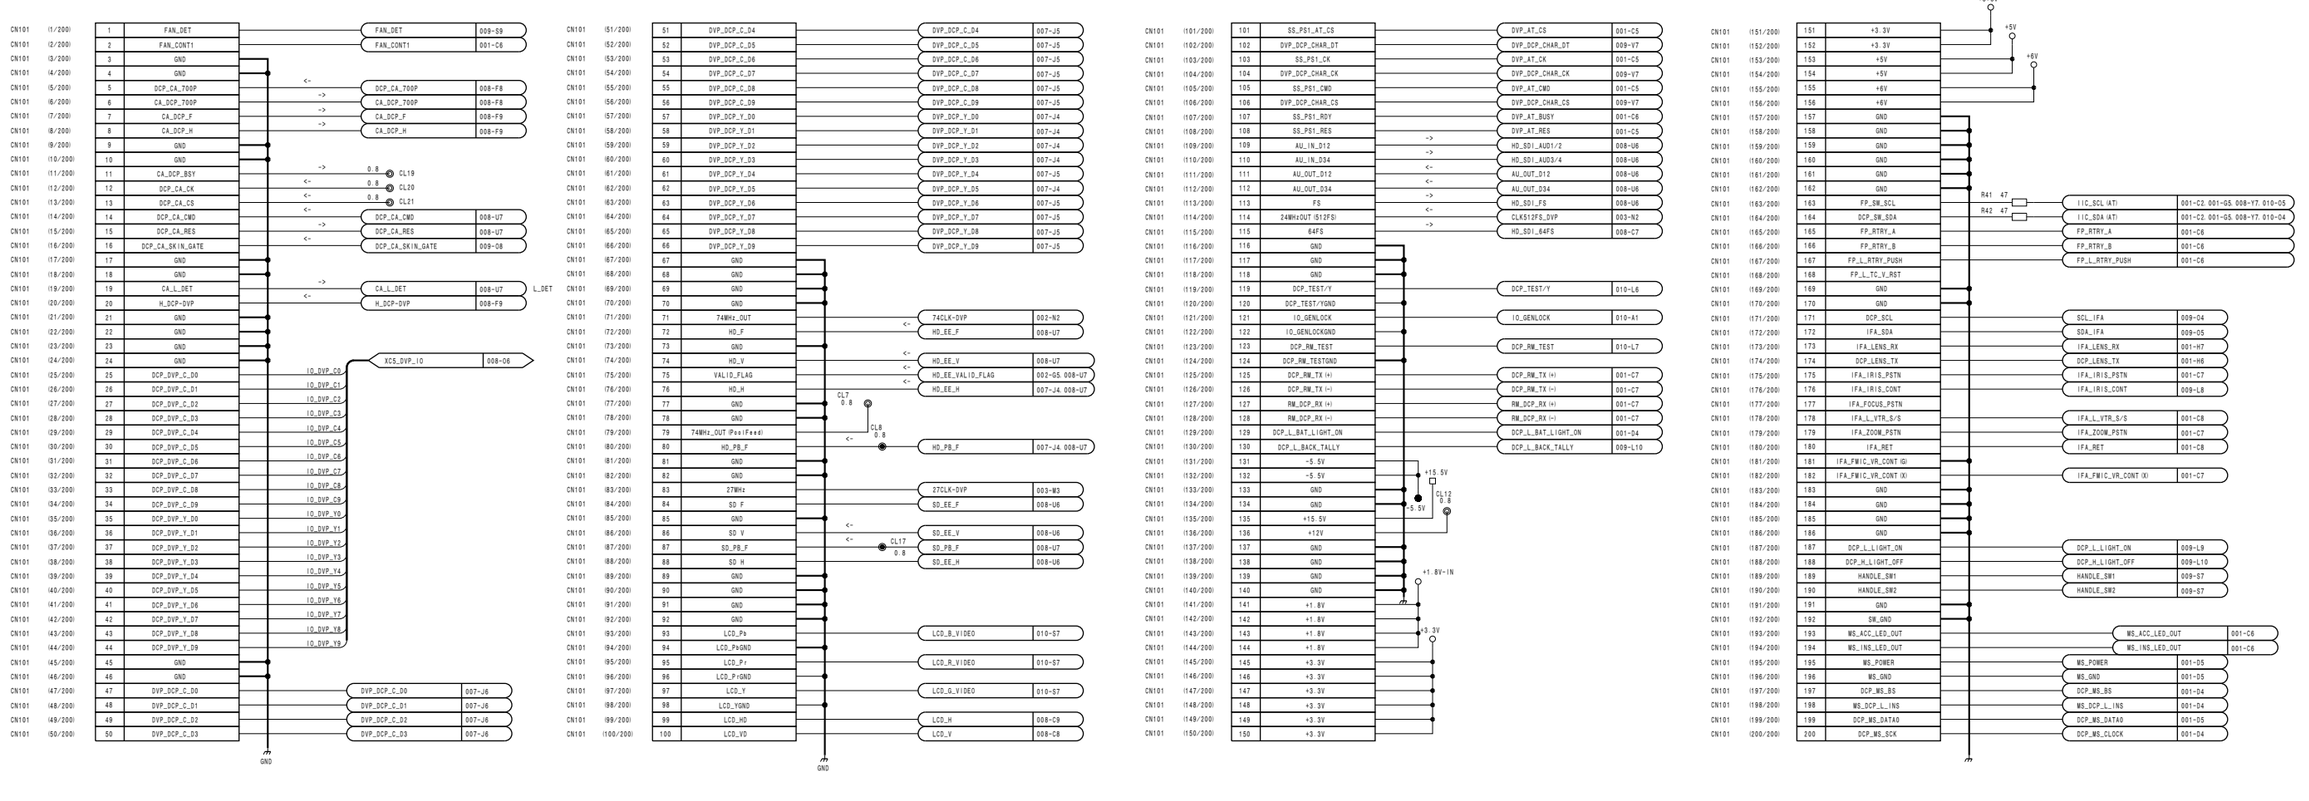


DCP-49A (1/10)
SUFFIX: -11

DCP-49A (1/10)
BOARD NO. 1-880-039-11
VCX-511_DCP-49A_011_1

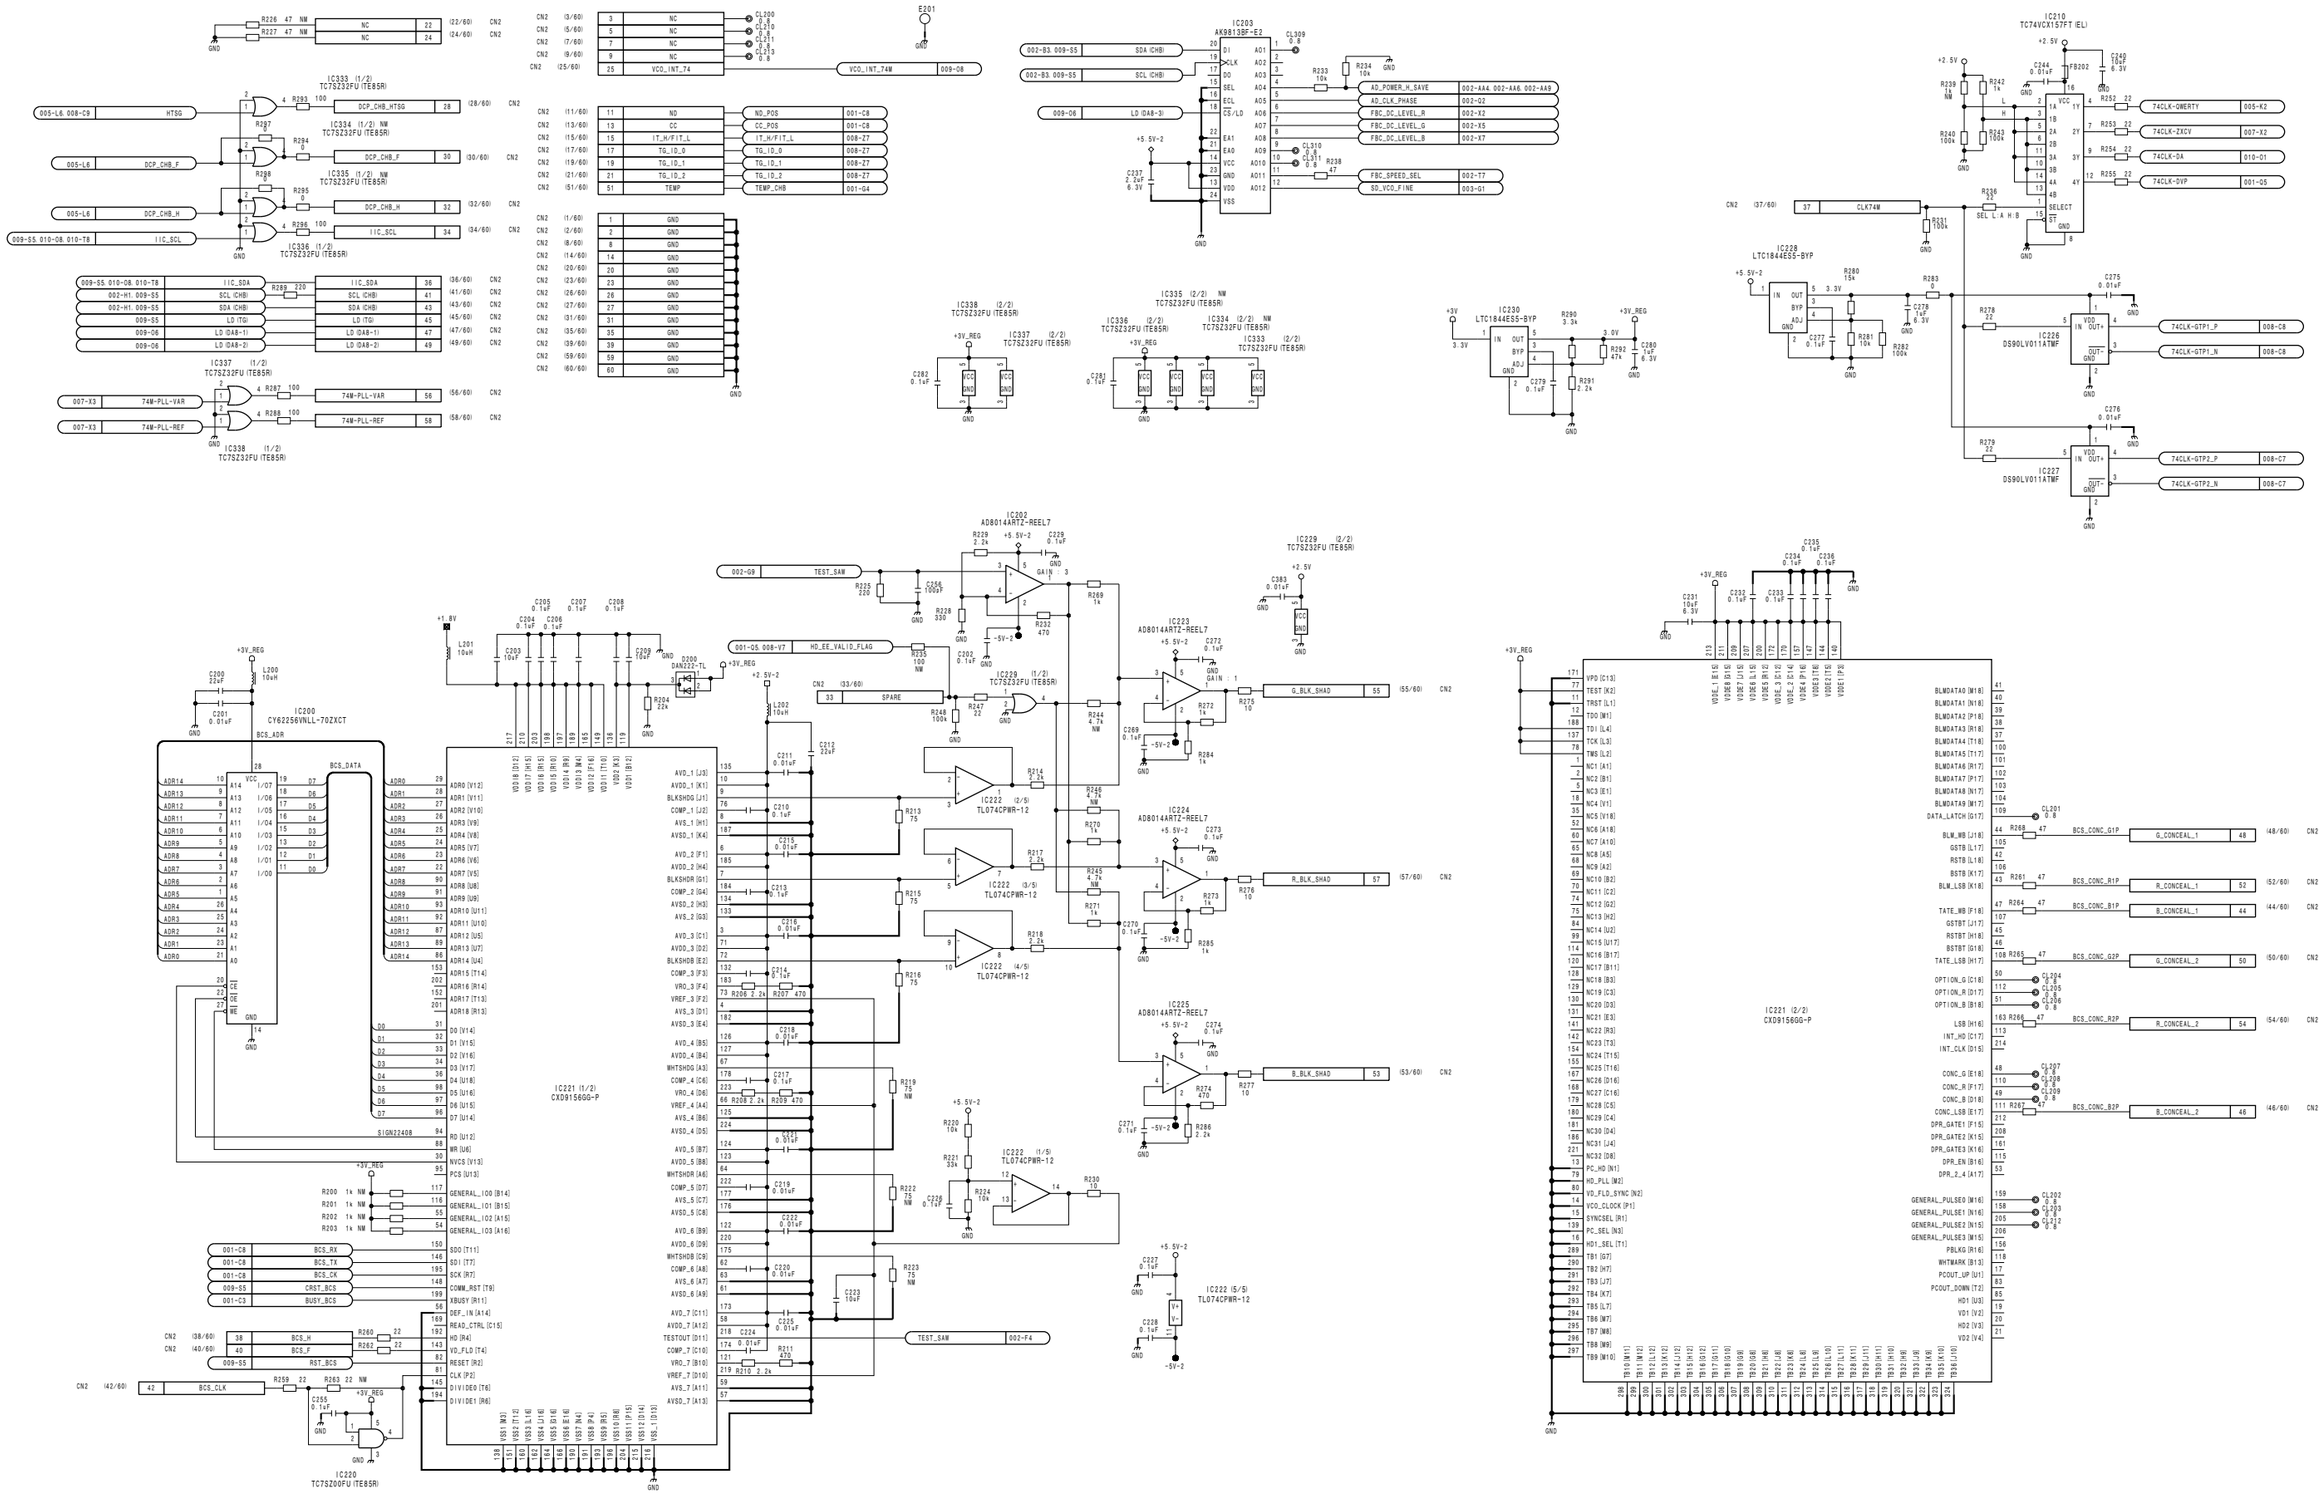
IC200
CY62256VNLL-70ZXCT
IC201 (1/2)
CXD9156GG-P
IC202
AD8014ARTZ-REEL7
IC203
AK9813BF-E2
IC210
TC74VCX157FT (EL)
IC220
TC7SZ09FU (TE85R)
IC221 (2/2)
CXD9156GG-P
IC222
TL074CPWR-12
IC223
AD8014ARTZ-REEL7
IC224
AD8014ARTZ-REEL7
IC225
AD8014ARTZ-REEL7
IC226
DS90LV011ATMF
IC227
DS90LV011ATMF
IC228
LTC1844ES5-BYP
IC230
LTC1844ES5-BYP
IC333 (1/3) TC7SZ32FU (TE85R)
IC334 (1/2) NW TC7SZ32FU (TE85R)
IC335 (1/2) NW TC7SZ32FU (TE85R)
IC336 (1/2) TC7SZ32FU (TE85R)
IC337 (1/2) TC7SZ32FU (TE85R)
IC338 (1/2) TC7SZ32FU (TE85R)
E201
+3V_REG
+5.5V-2
+2.5V
+1.8V
-5V-2
GND
HTSG
DCP_CHB_HTSG
DCP_CHB_F
DCP_CHB_H
IIC_SCL
IIC_SDA
SCL (CHB)
SDA (CHB)
LD (TG)
LD (DAB-1)
LD (DAB-2)
74M-PLL-VAR
74M-PLL-REF
BCS_ADR
BCS_DATA
BCS_CLK
BCS_RX
BCS_TX
BCS_CK
CRST_BCS
BUSY_BCS
BCS_H
BCS_F
RST_BCS
SIGN22408
TEST_SAW
HD_EE_VALID_FLAG
SPARE
G_BLK_SHAD
R_BLK_SHAD
B_BLK_SHAD
FBC_SPEED_SEL
SD_VCO_FINE
AD_POWER_H_SAVE
AD_CLK_PHASE
FBC_DC_LEVEL_R
FBC_DC_LEVEL_G
FBC_DC_LEVEL_B
CLK74M
74CLK-QWERTY
74CLK-ZXCV
74CLK-DA
74CLK-DVP
74CLK-GTP1_P
74CLK-GTP1_N
74CLK-GTP2_P
74CLK-GTP2_N
G_CONCEAL_1
R_CONCEAL_1
B_CONCEAL_1
G_CONCEAL_2
R_CONCEAL_2
B_CONCEAL_2
BCS_CONC_G1P
BCS_CONC_R1P
BCS_CONC_B1P
BCS_CONC_G2P
BCS_CONC_R2P
BCS_CONC_B2P
VCO_INT_74W
VCO_INT_74
ND_POS
CC_POS
IT_H/FIT_L
TG_ID_0
TG_ID_1
TG_ID_2
TEMP
TEMP_CHB
SIGNAL_100
SIGNAL_101
SIGNAL_102
SIGNAL_103
SEL L: A H: B
SELECT
OPTION_G
OPTION_R
OPTION_B
DATA_LATCH
PBLKG
WHTMARK
PCOUT_UP
PCOUT_DOWN
SYNCSEL
PC_SEL
HD1_SEL
VD_FLD_SYNC
VCO_CLOCK
PLL_MD
PC_HD
R_CONCEAL_0
G_CONCEAL_0
B_CONCEAL_0

DCP-49A (2/10)
SUFFIX: -11


DCP-49A (2/10)
SUFFIX: -11

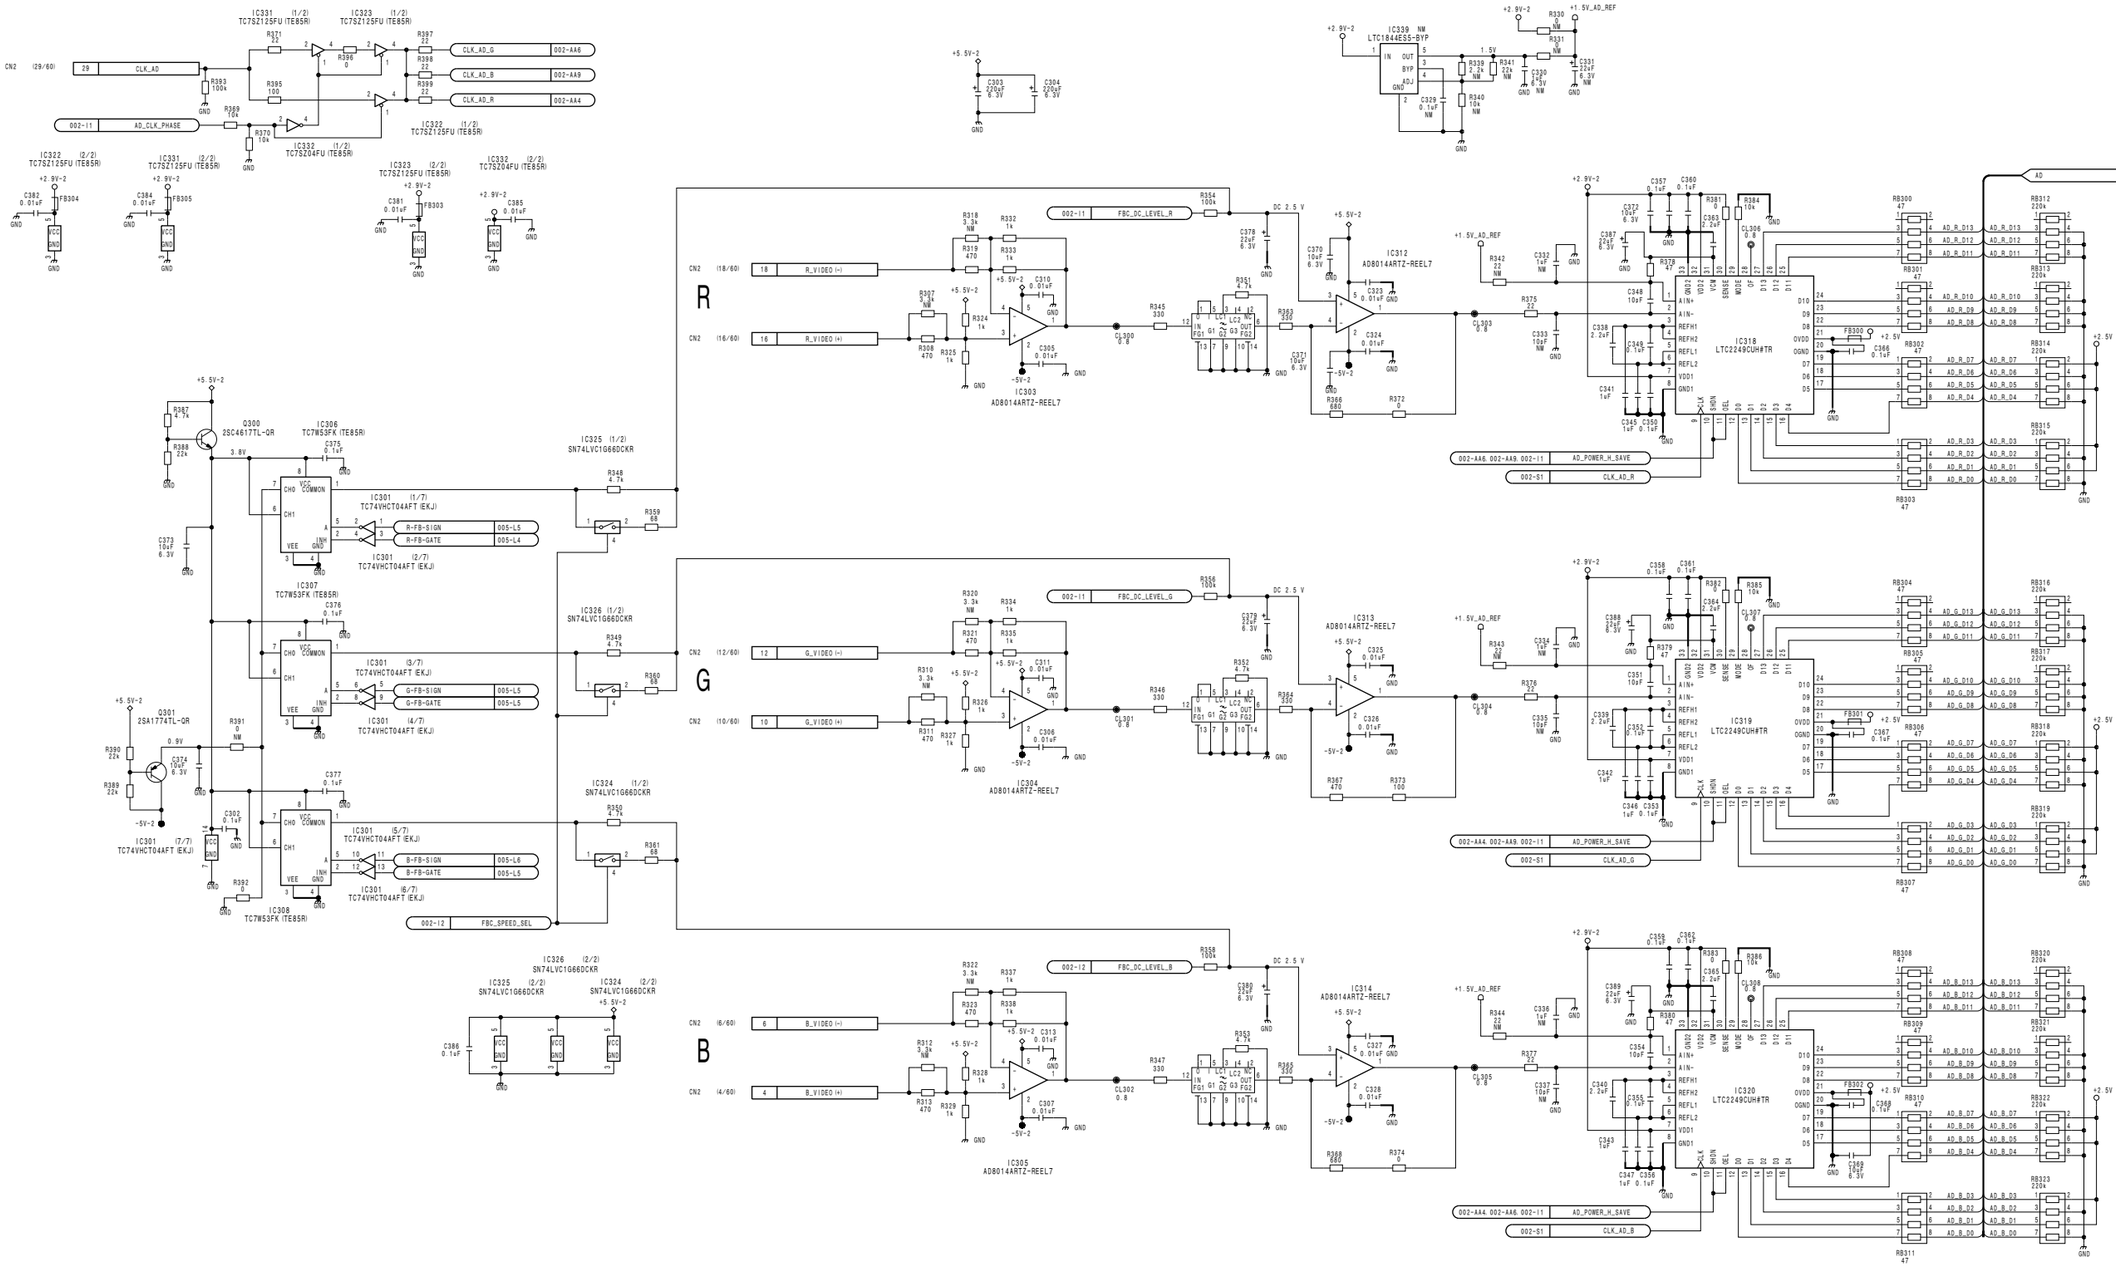

DCP-49A (2/10)
BOARD NO. 1-880-039-11
VCX-511_DCP-49A_011_2

DCP-49A (3/10)
SUFFIX: -11

DCP-49A (3/10)
SUFFIX: -11

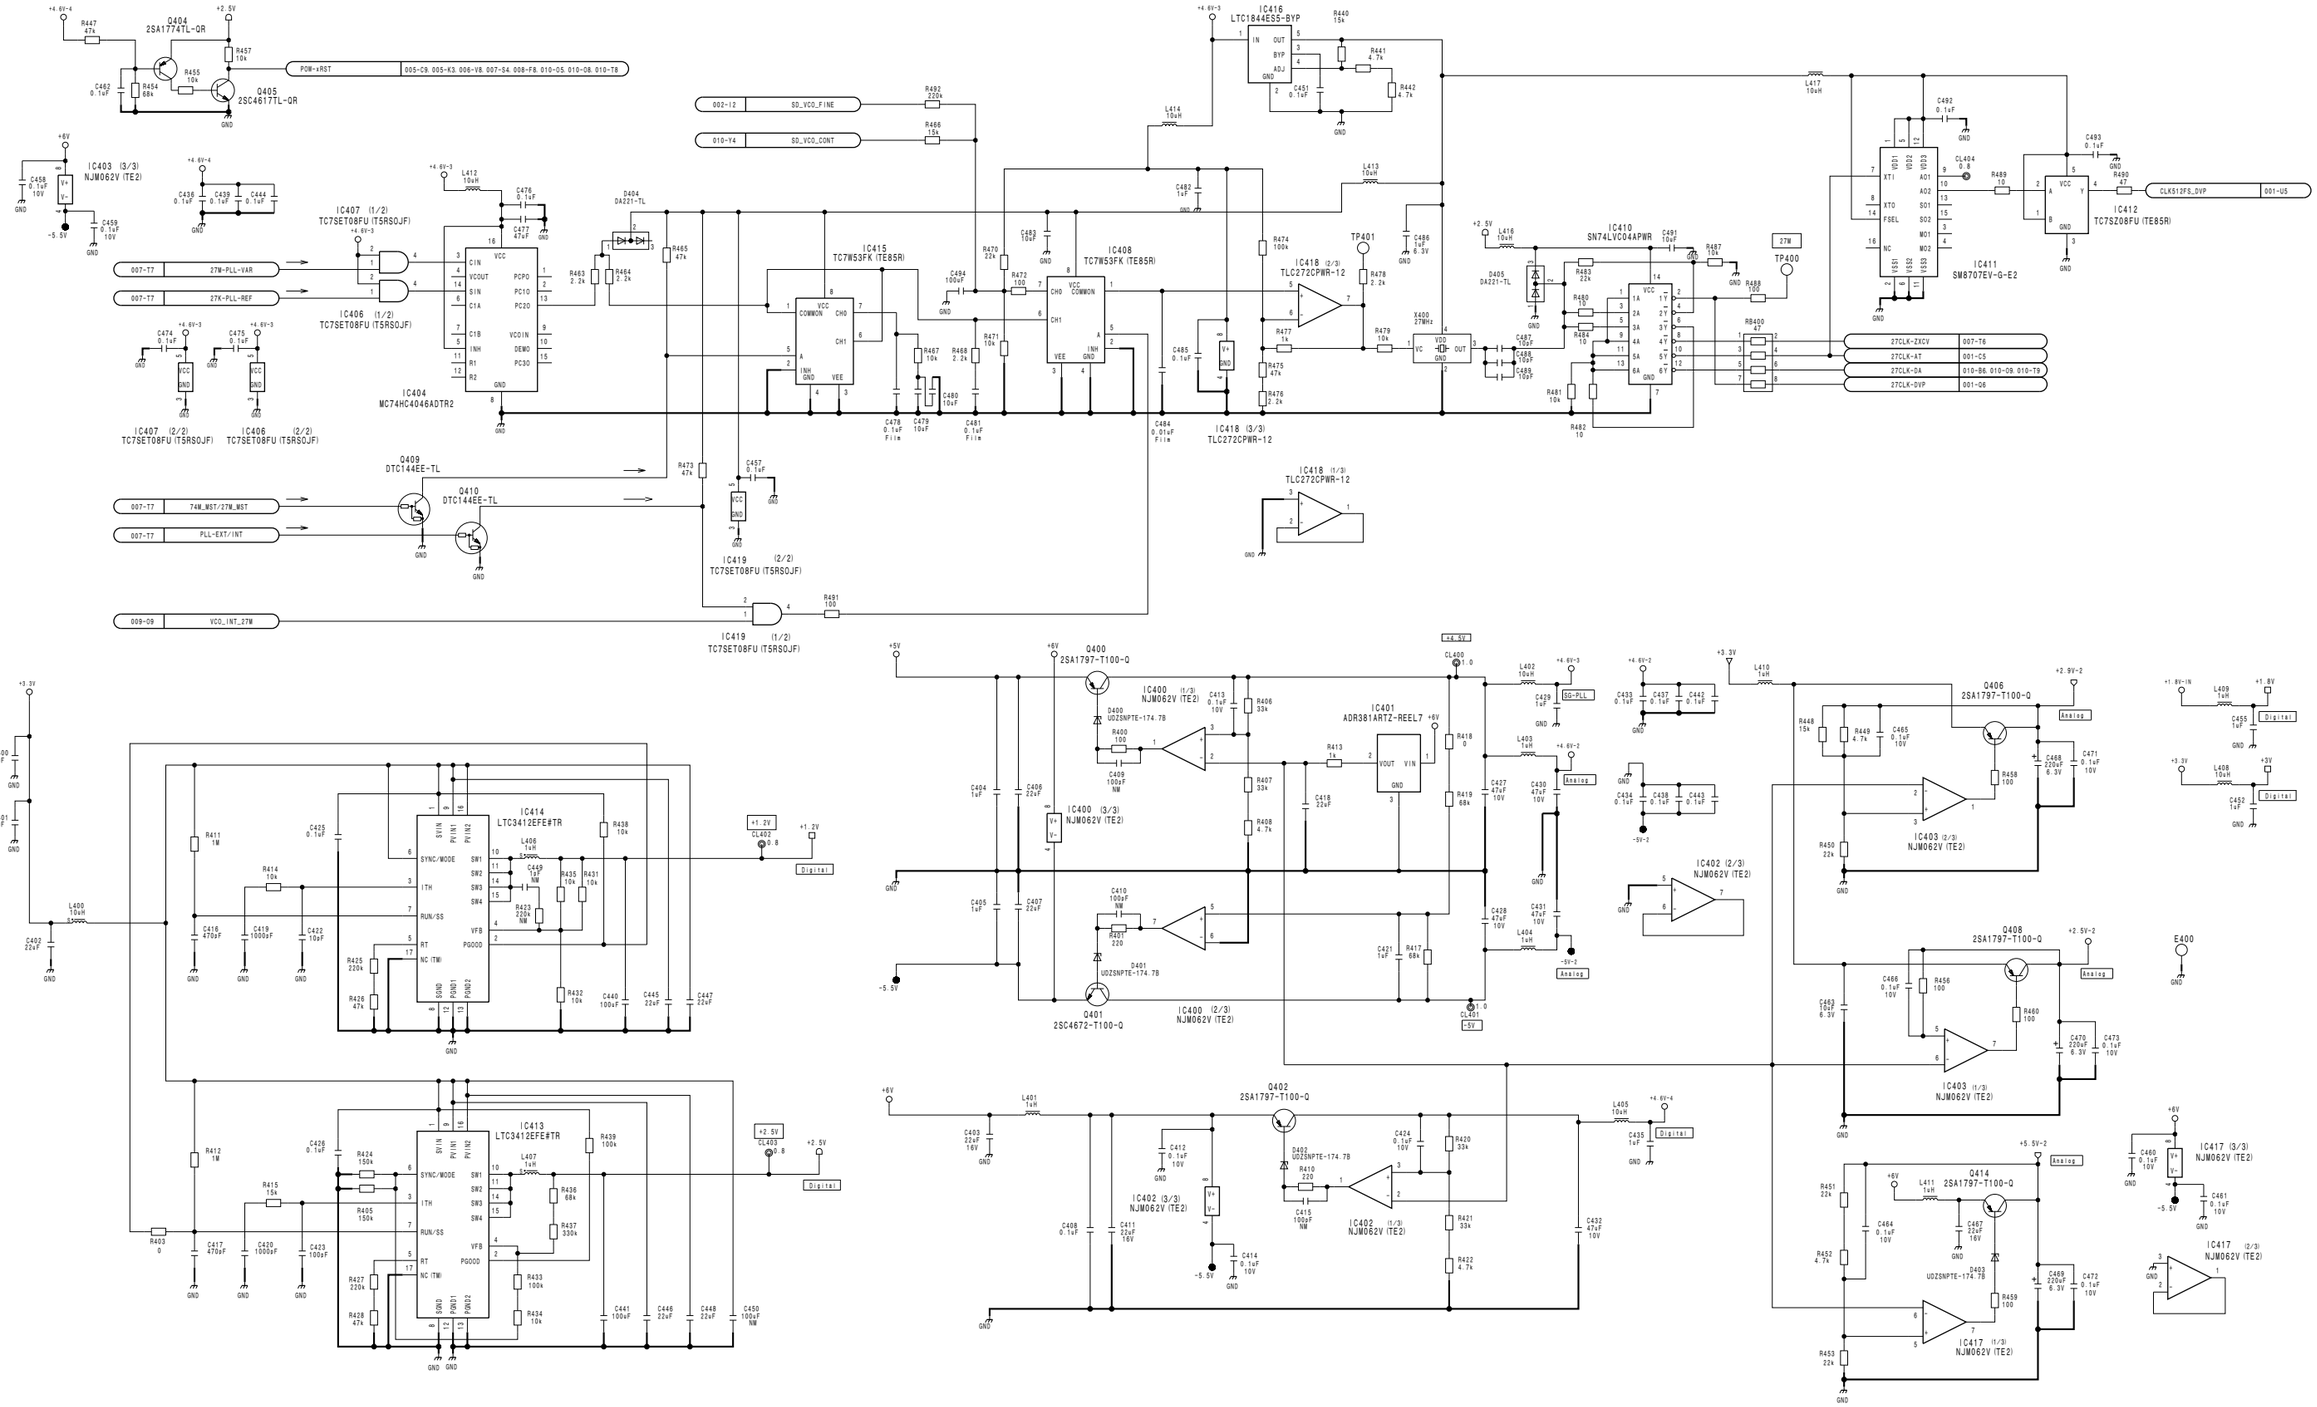


DCP-49A (3/10)

BOARD NO. 1-880-039-11


VCX-511_DCP-49A_011_3

DCP-49A (4/10) **SUFFIX: -11**

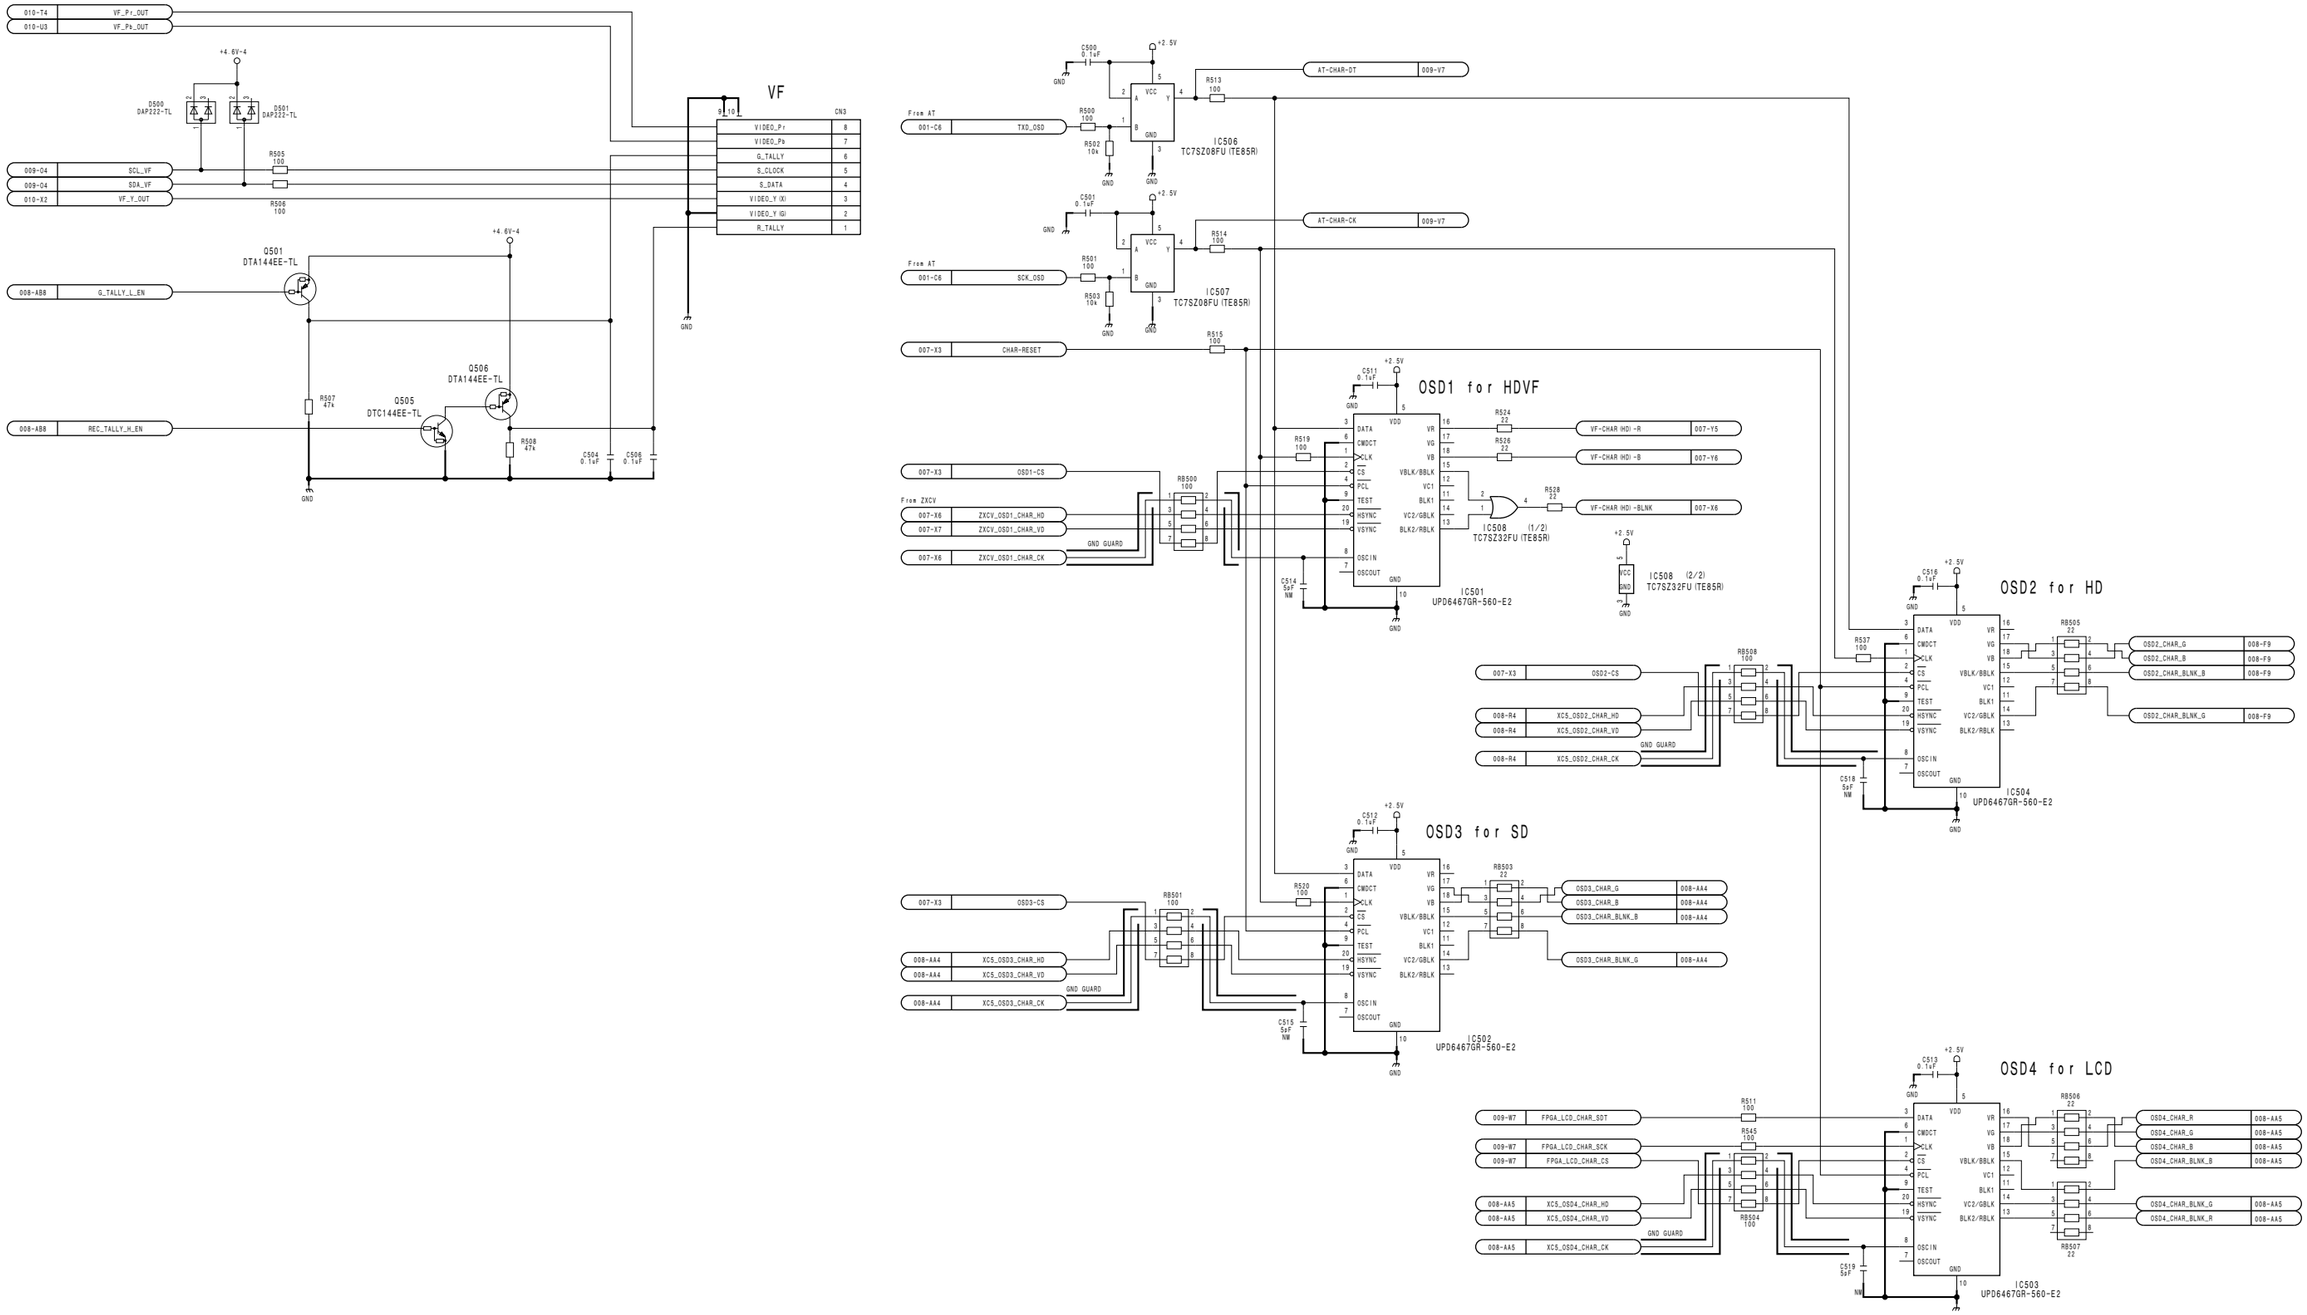


IC600 (16/19)
CX09187GG-P
IC600 (17/19)
CX09187GG-P
IC600 (18/19)
CX09187GG-P
IC600 (19/19)
CX09187GG-P
IC600 (14/19)
CX09187GG-P
IC600 (15/19)
CX09187GG-P
+2.5V
+1.2V
GND
POW-xRST
R600 100
R601 2.2k
R602 2.2k


DCP-49A (5/10)
SUFFIX: -11

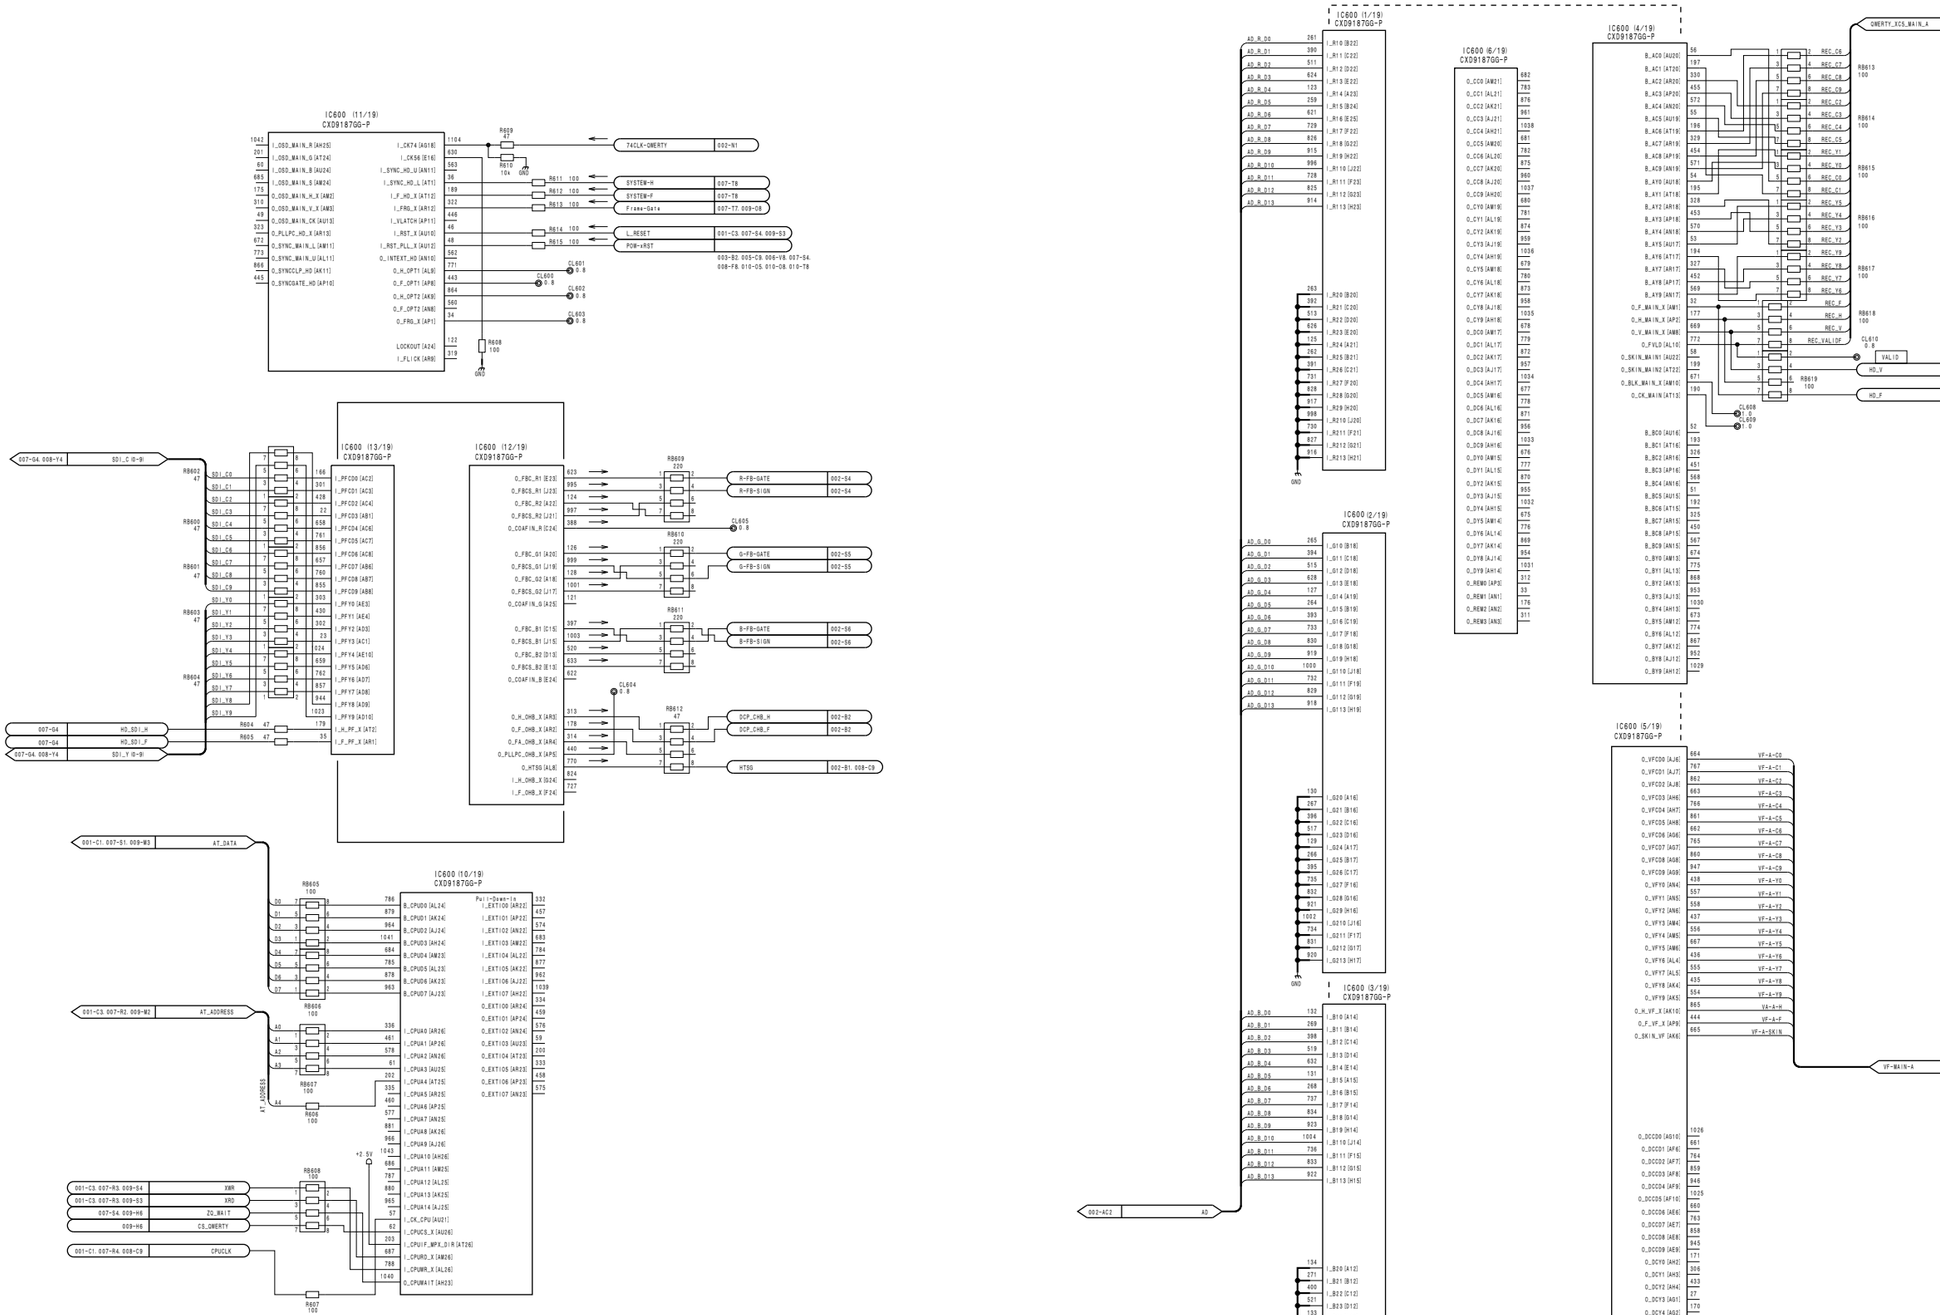


DCP-49A (5/10)
BOARD NO. 1-880-039-11
VCX-511_DCP-49A_011_5

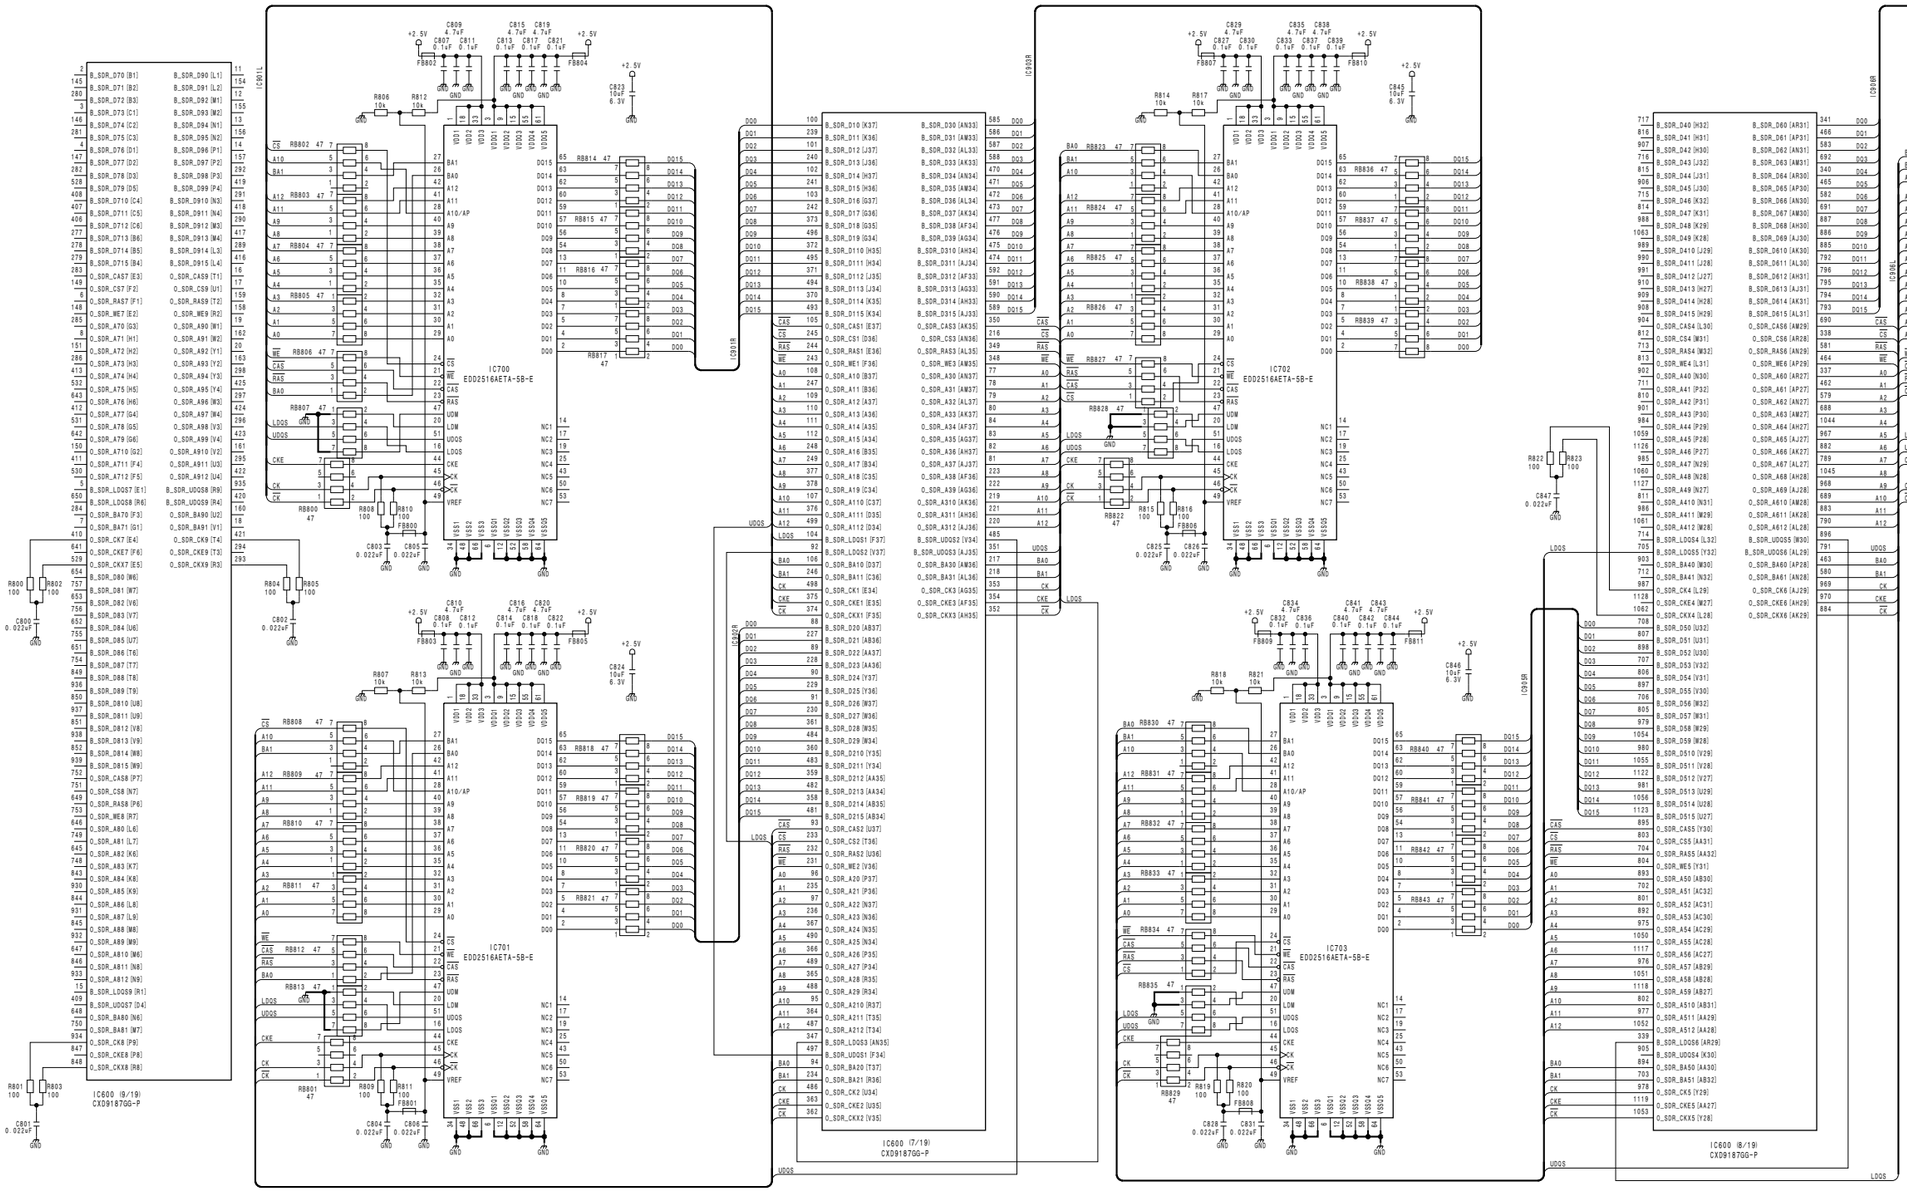

IC700
EDD2516AETA-5B-E
IC701
EDD2516AETA-5B-E
IC702
EDD2516AETA-5B-E
IC703
EDD2516AETA-5B-E
IC704
EDD2516AETA-5B-E
IC600 (8/19)
CXD9187GG-P
IC600 (7/19)
CXD9187GG-P
IC600 (8/19)
CXD9187GG-P


DCP-49A (6/10)
SUFFIX: -11

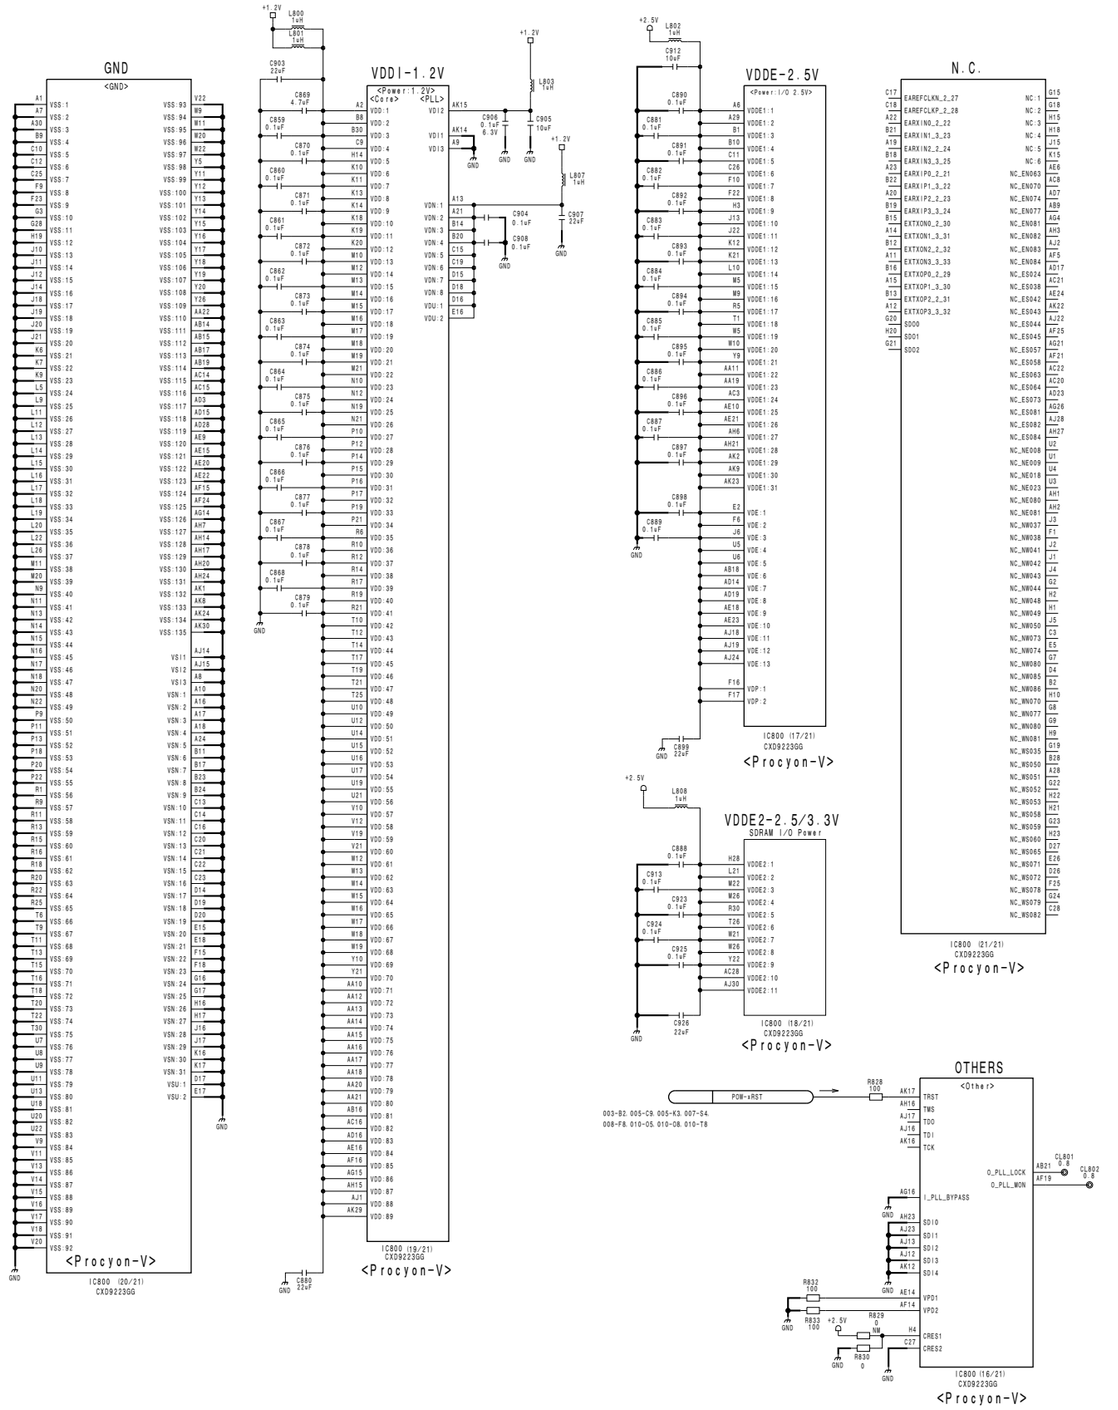

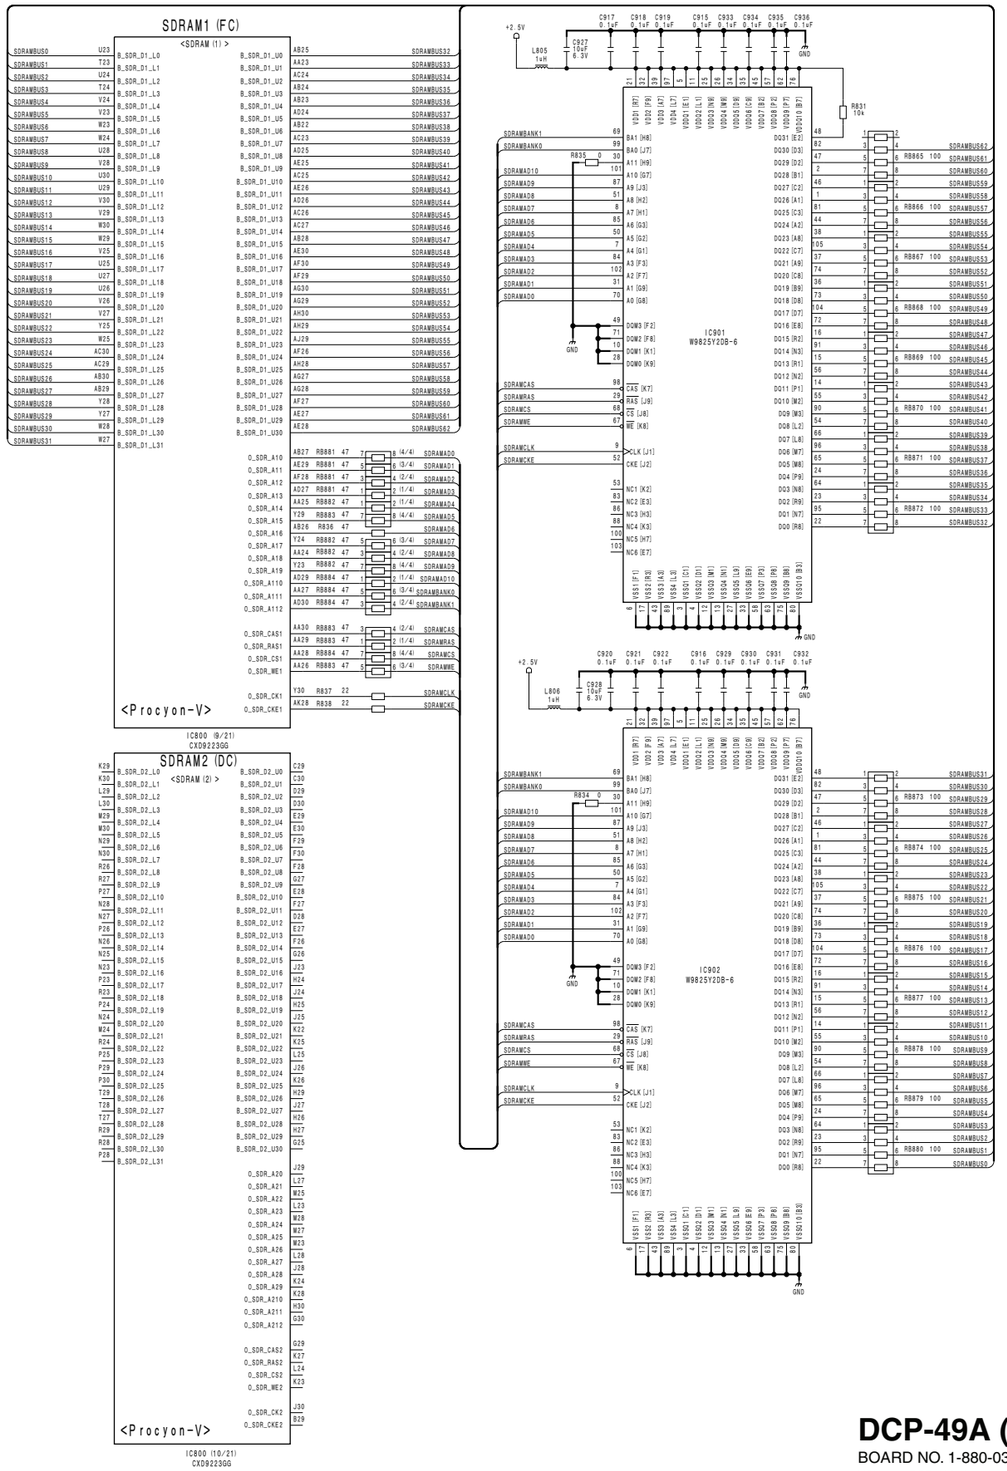


DCP-49A (7/10)
SUFFIX: -11

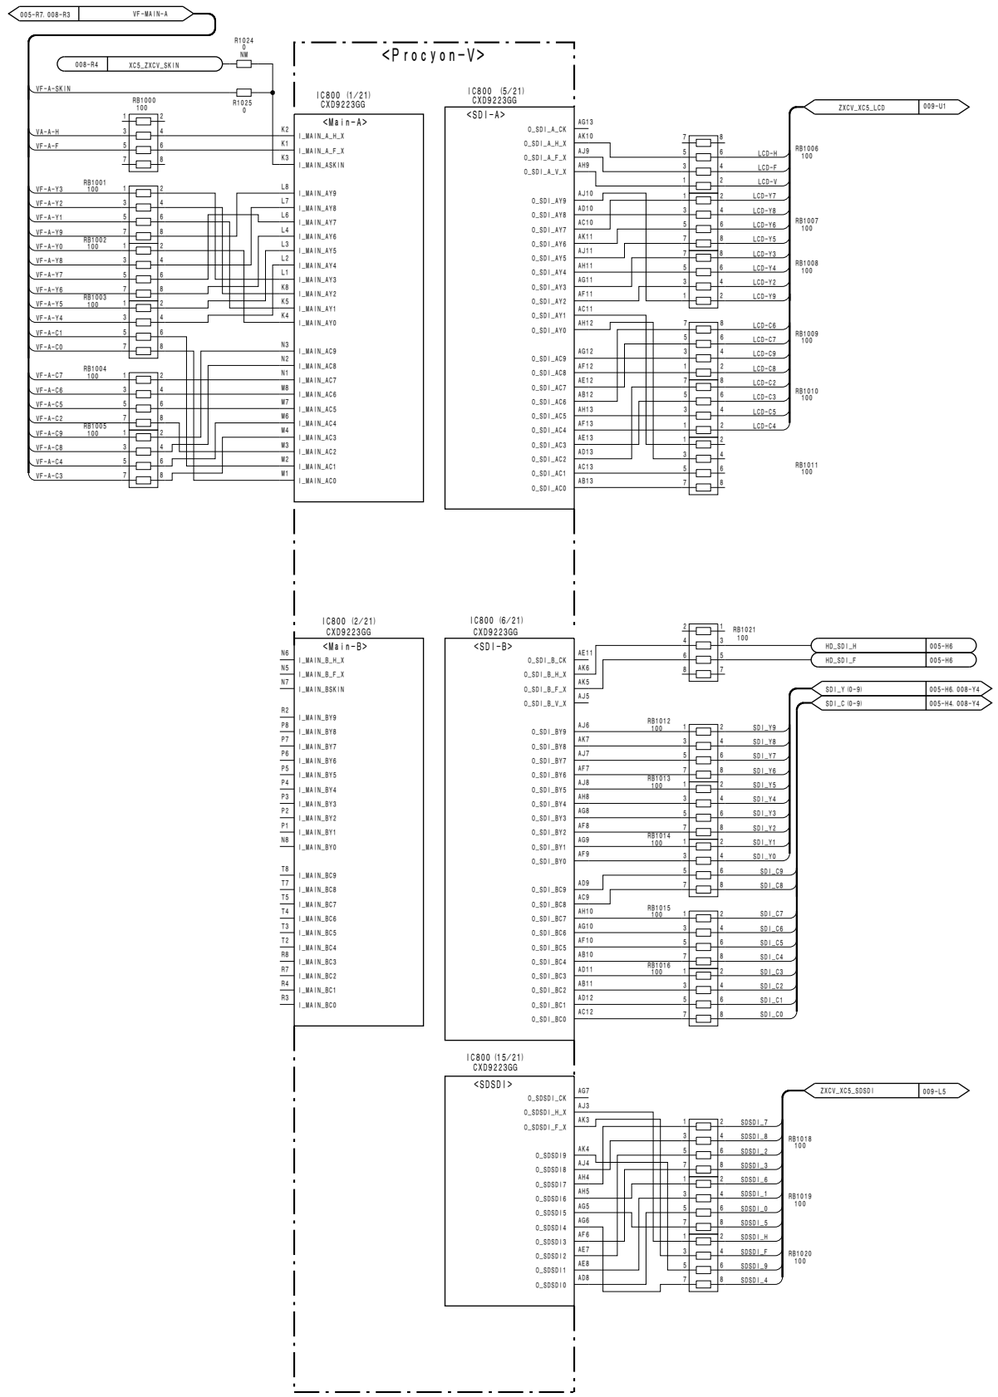

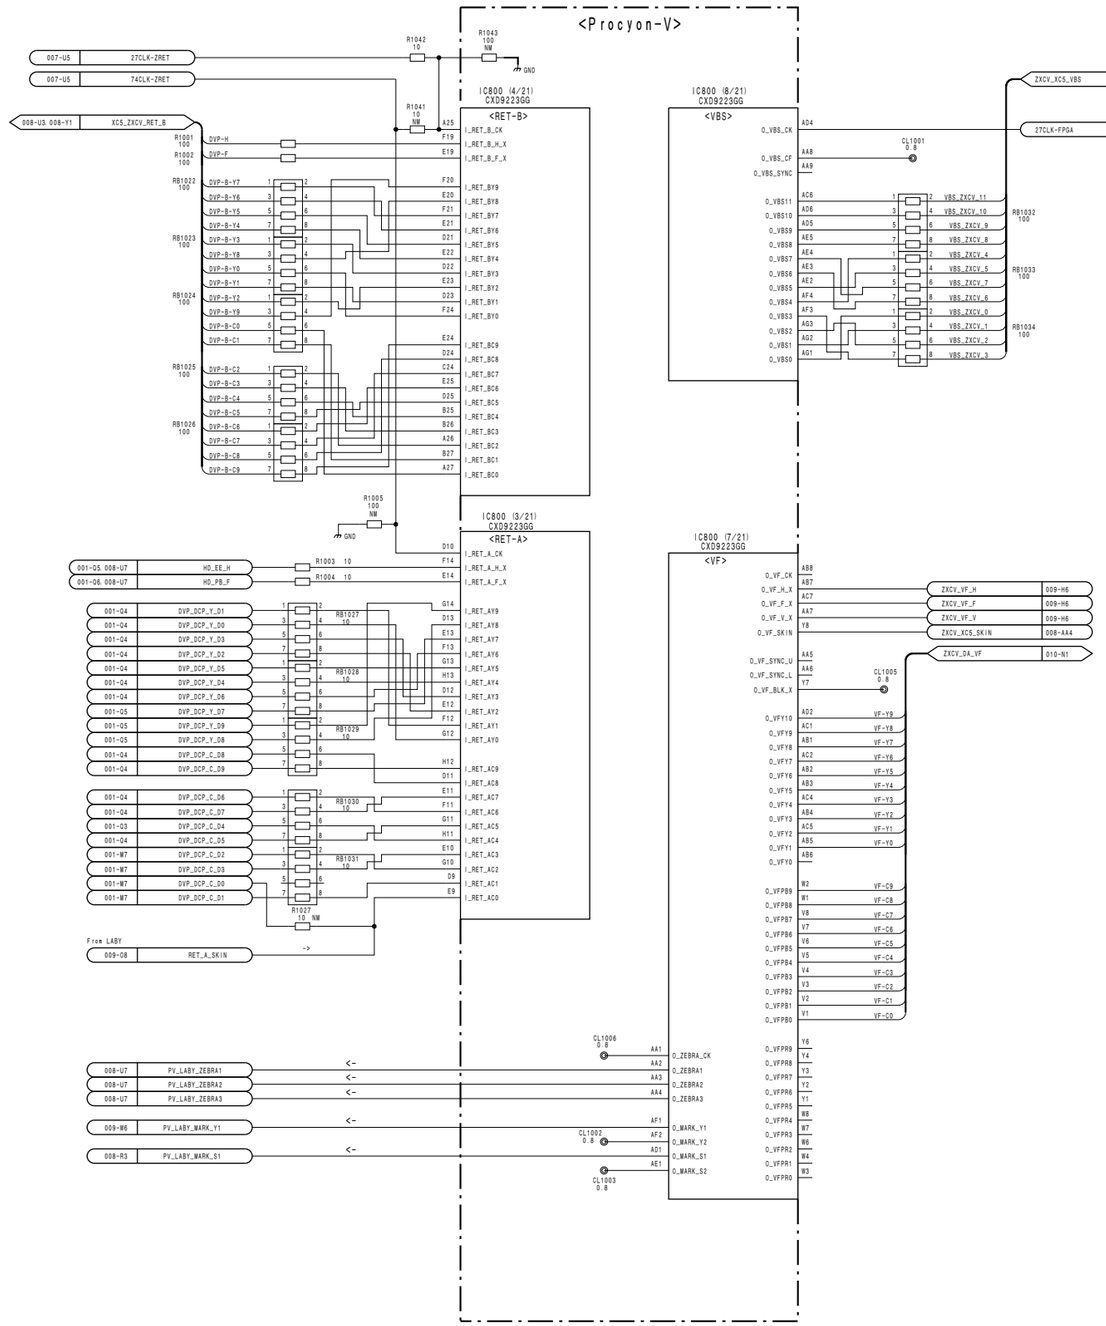

3-26


DCP-49A (7/10)
SUFFIX: -11

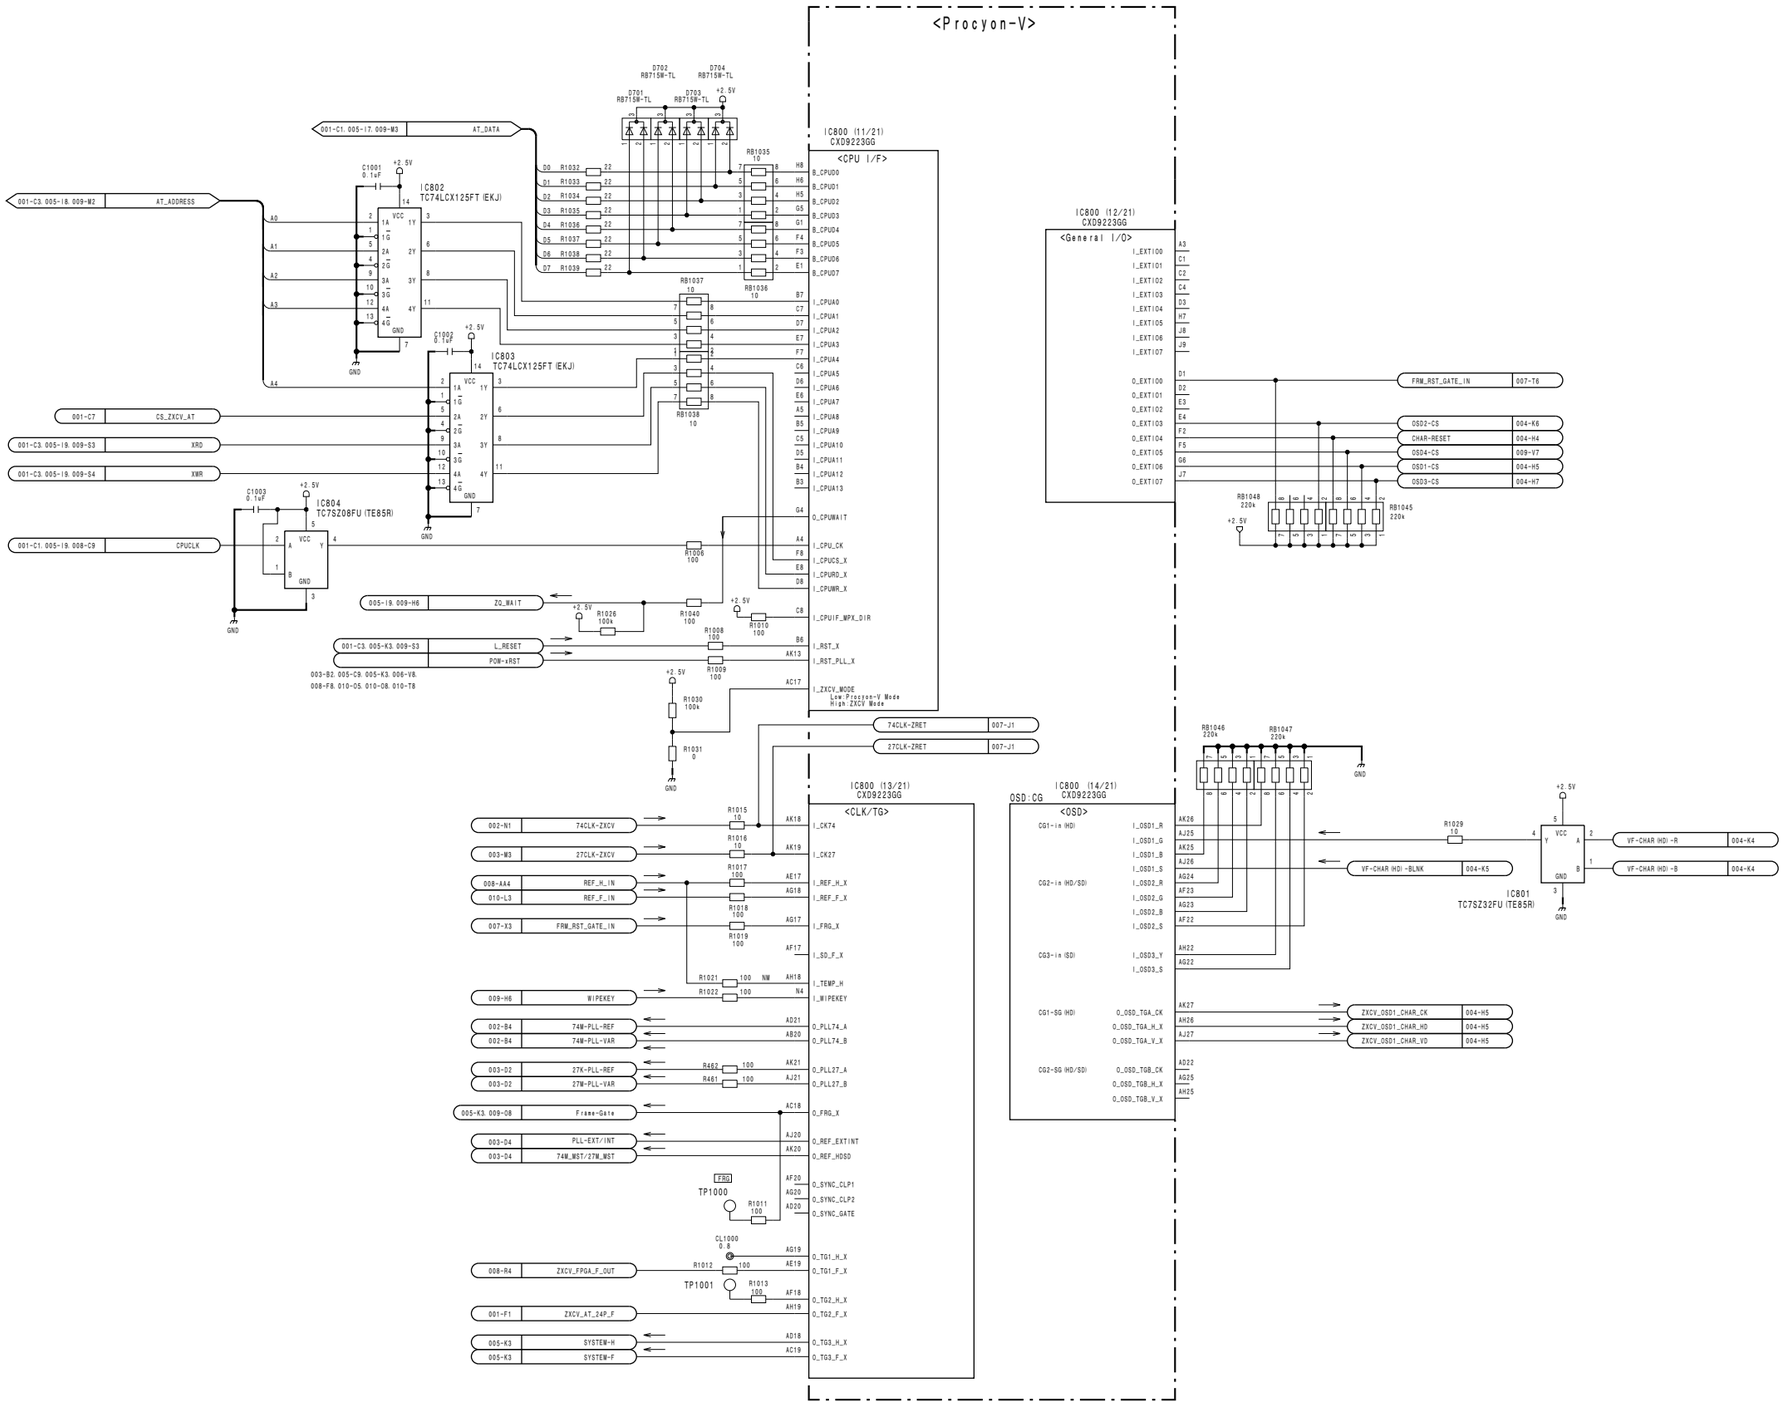


DCP-49A (7/10)
BOARD NO. 1-880-039-11
VCX-511_DCP-49A_011_7

DCP-49A (8/10)
SUFFIX: -11


Configuration

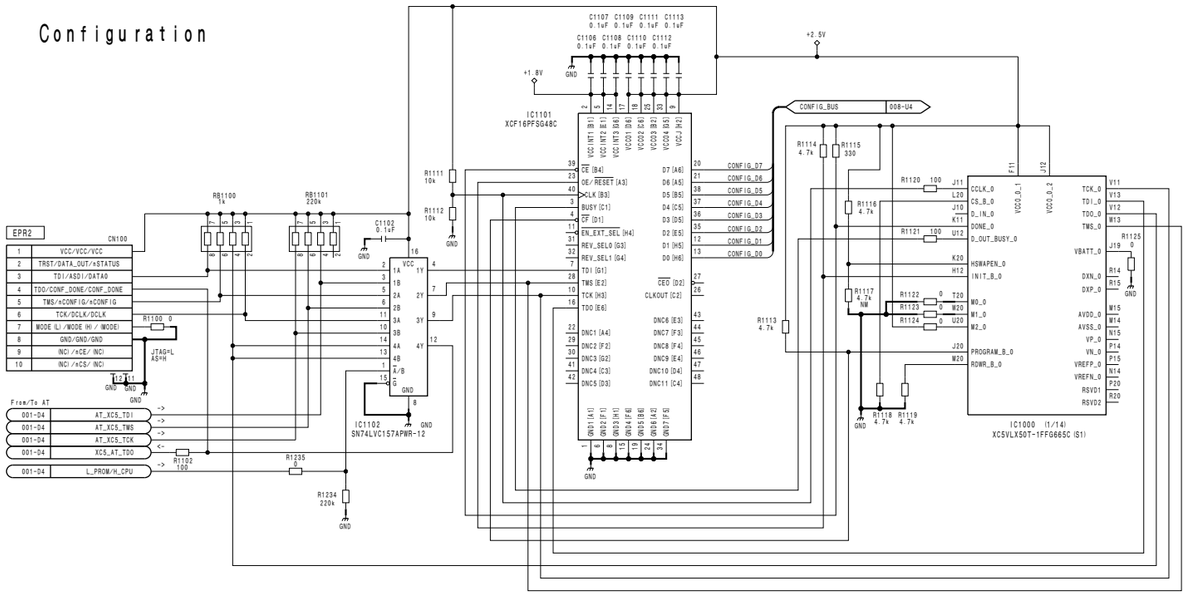


TIMING

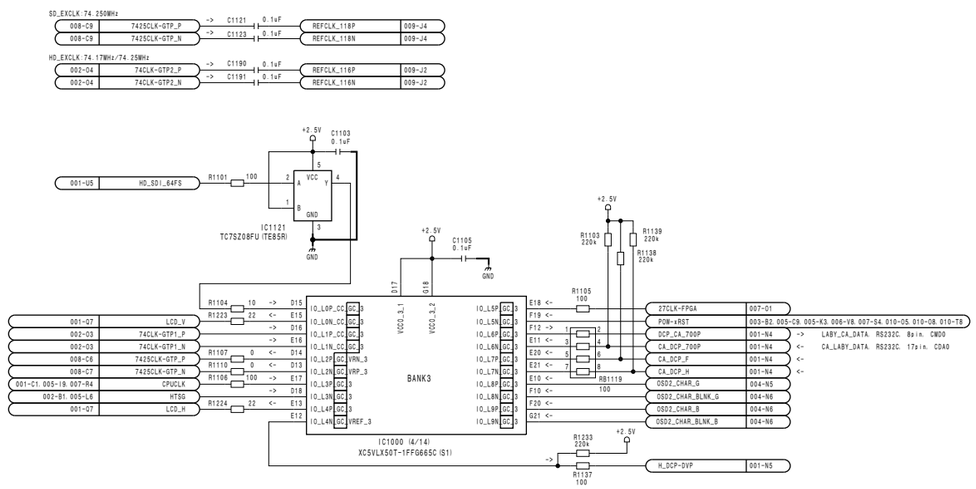


SDI_IN

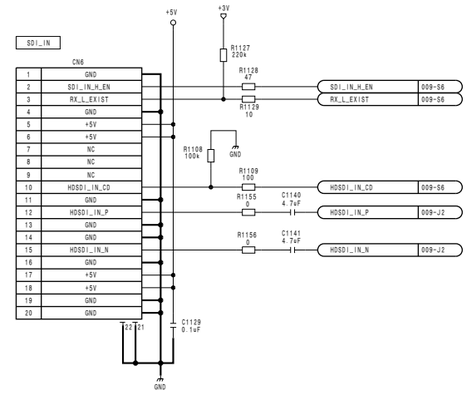


CA_IN

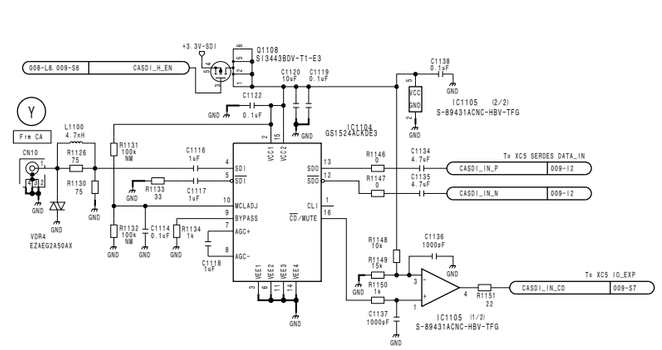


SDI1_OUT

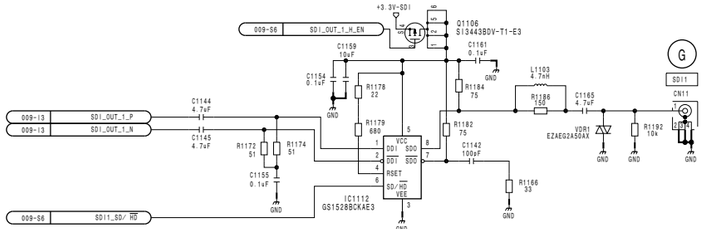

SDI2_OUT

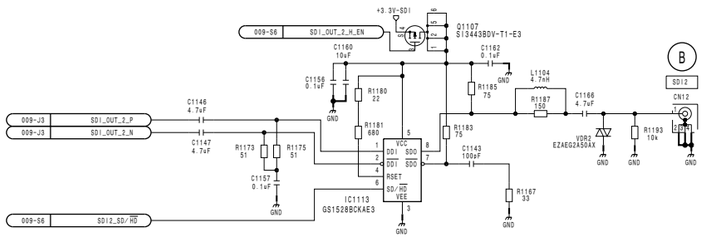


CA_OUT

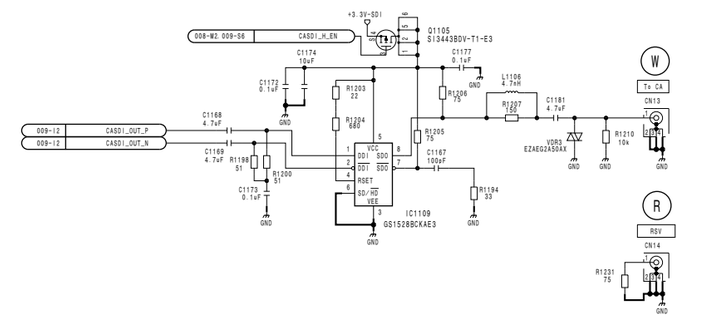


3-28


DCP-49A (8/10)
SUFFIX: -11

HD_IN

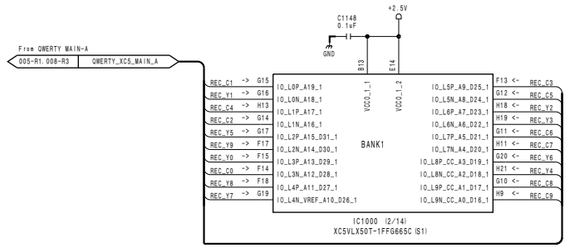


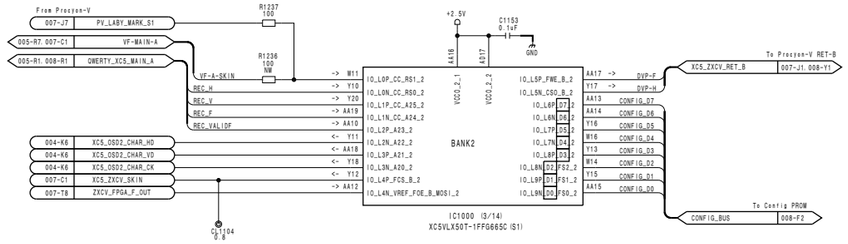


DIR

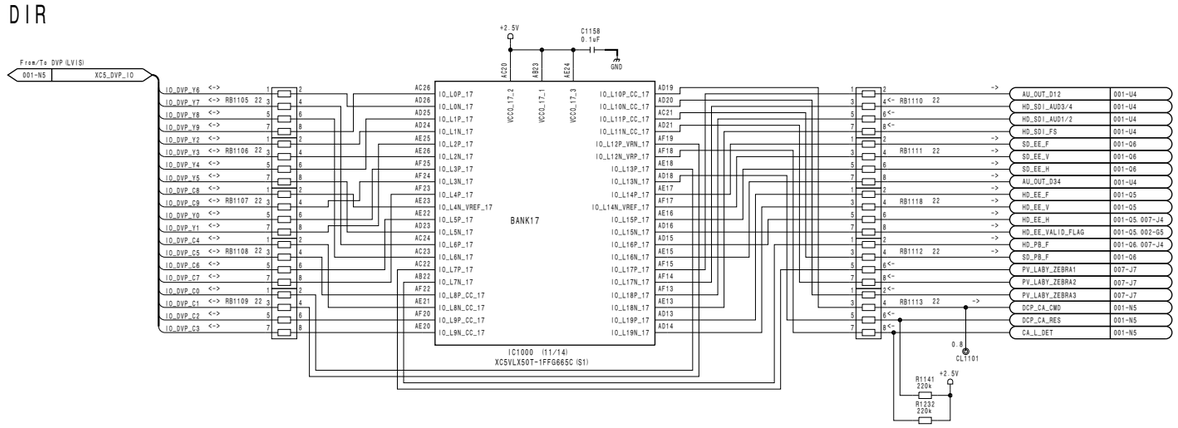



Power - 3.3V for SDI

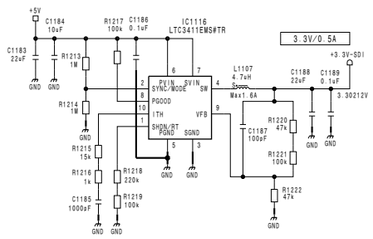

VIDEO_PROC

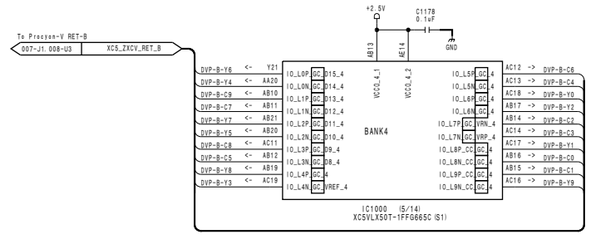

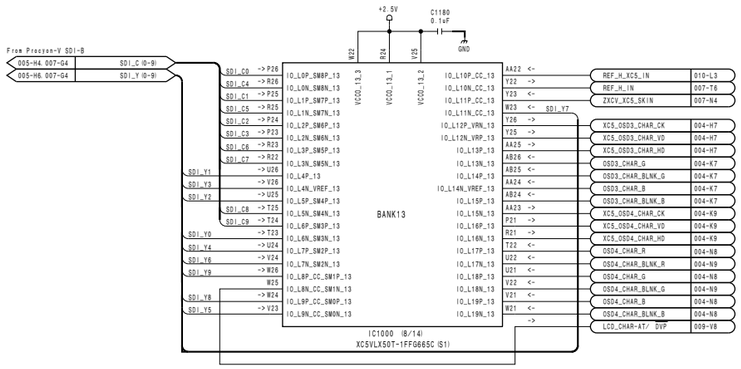


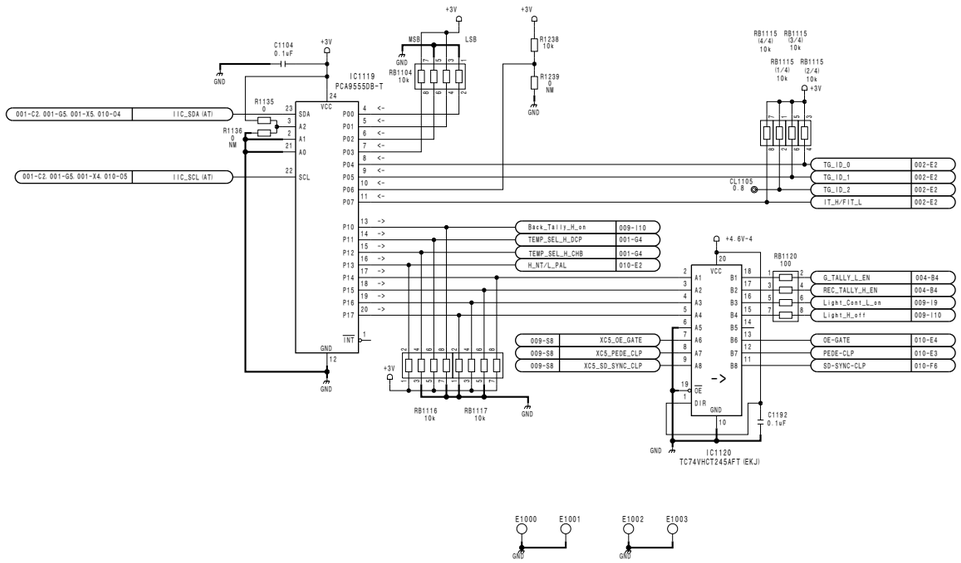


DCP-49A (8/10)
BOARD NO. 1-880-039-11
VCX-511_DCP-49A_011_8

DCP-49A (9/10) **SUFFIX: -11**


GTP Power - 1.2V for AVRX (0.25A)

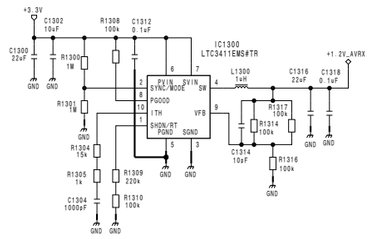

GTP Power - 1.2V for APLL (0.25A)

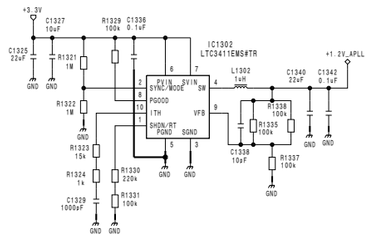


GTP Power - 1.0V for AVCC (0.25A)

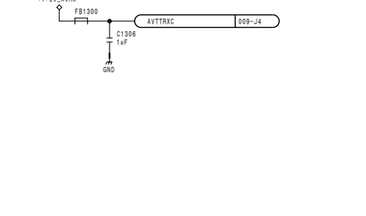



GTP Power - 1.2V for AVTTX (0.25A)


GTP Power - Filters

SYS

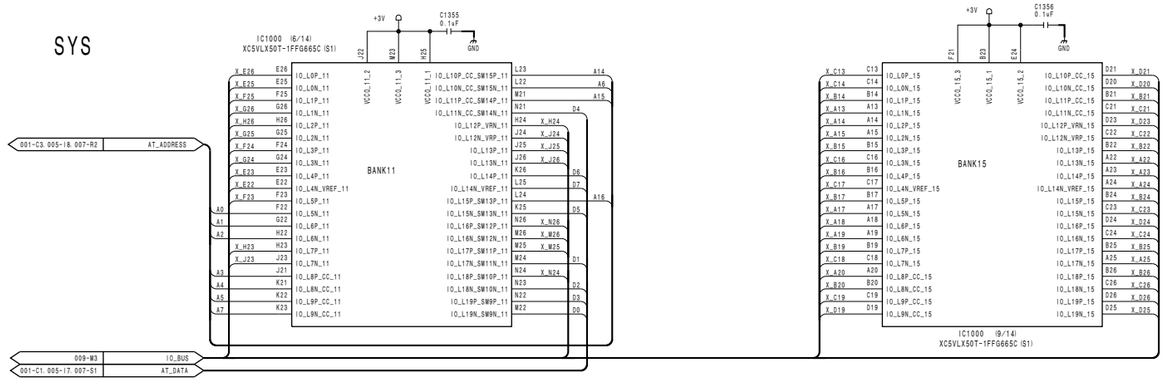

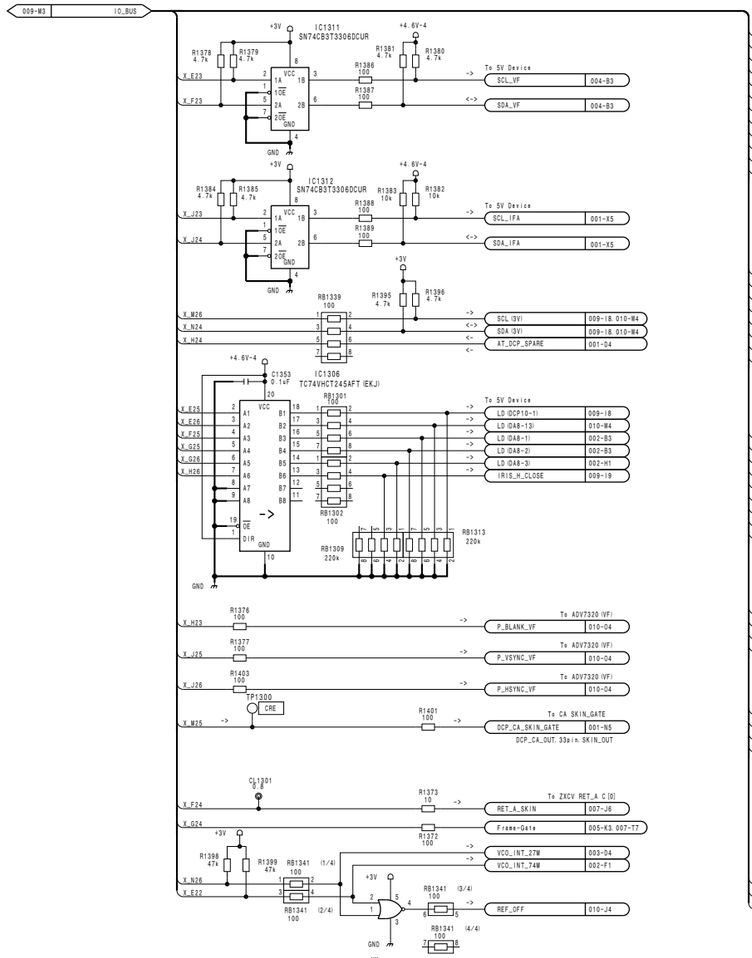


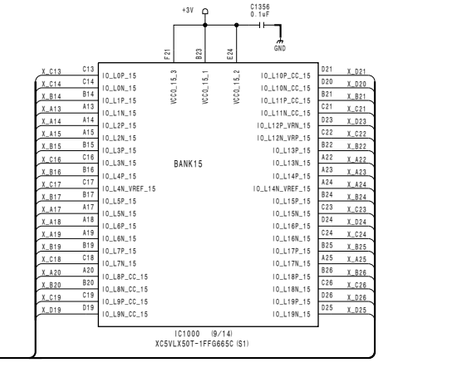


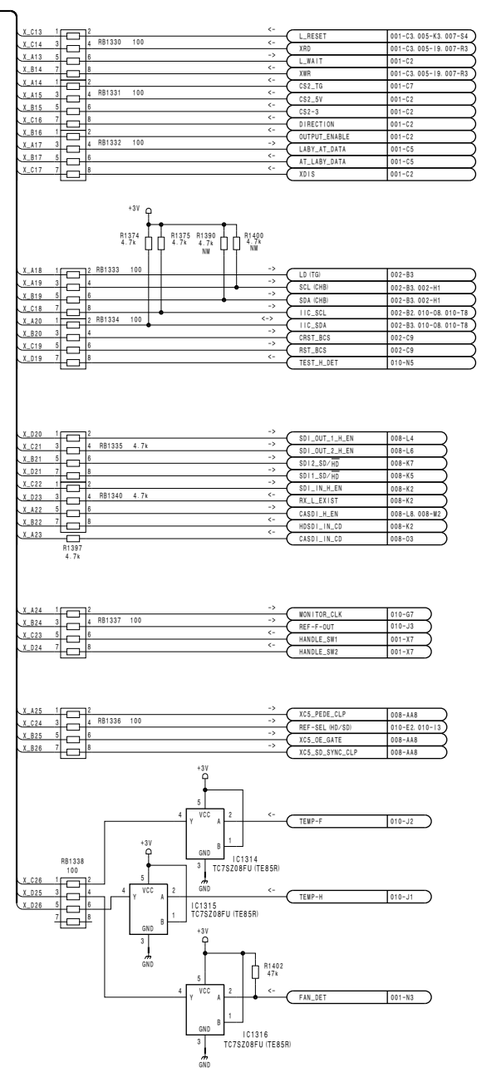



3-30

LCD_PROC

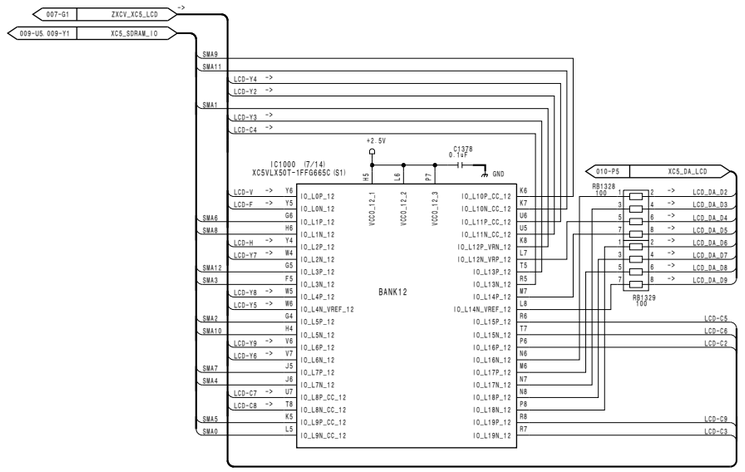


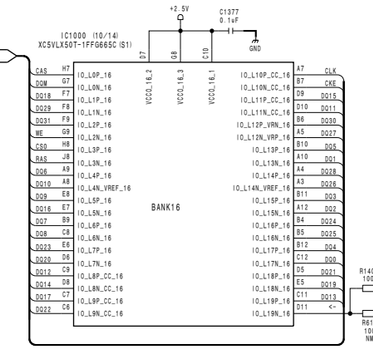

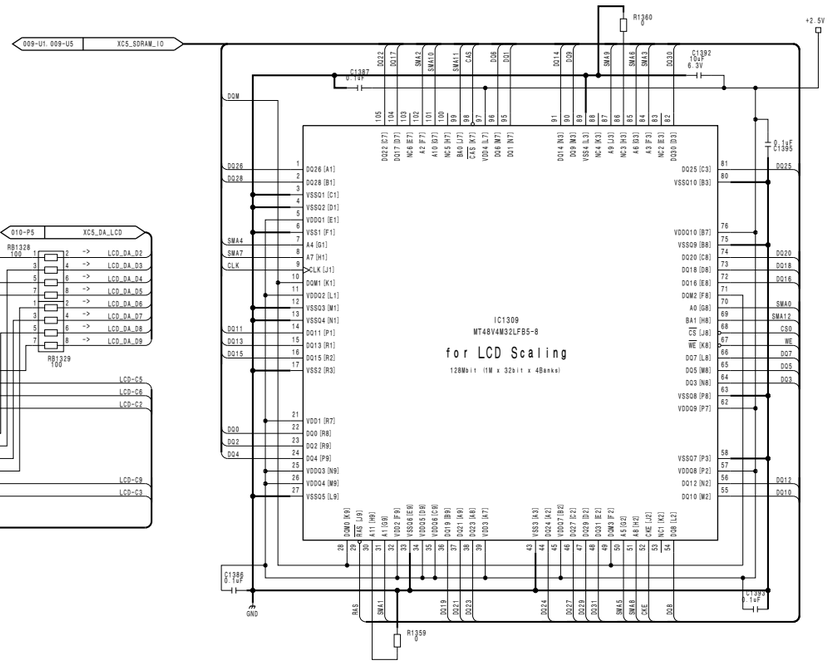


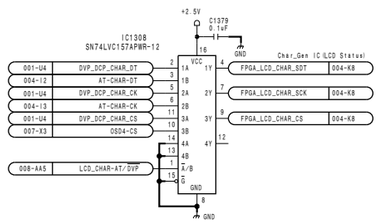


Power - 1.0V for CORE (0.6A)

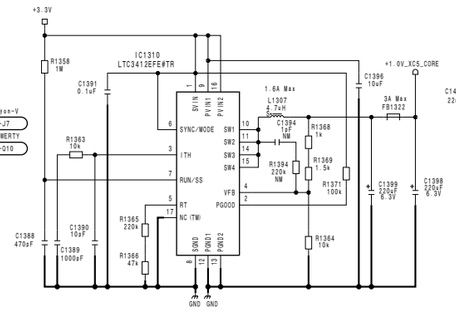


Power - 2.5V for AUX (0.2A)

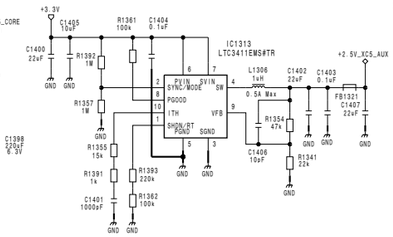


POWER

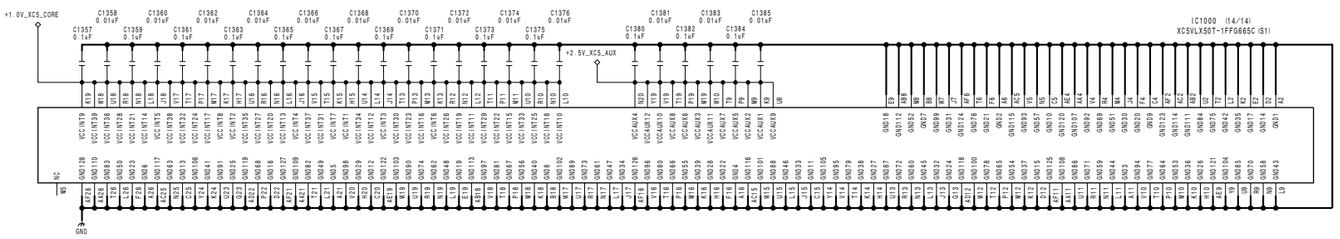



GTP

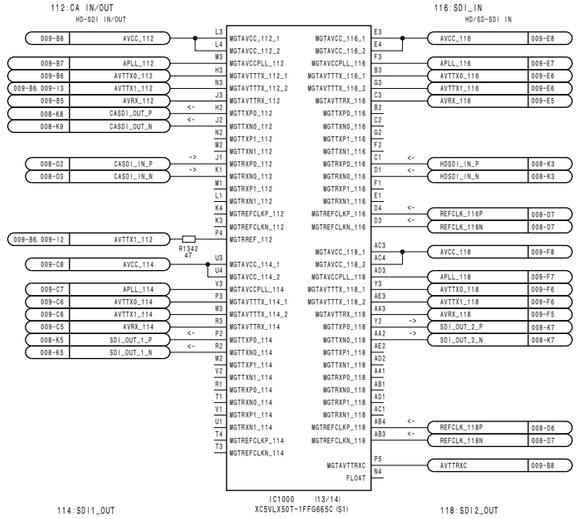

VBS_PROC

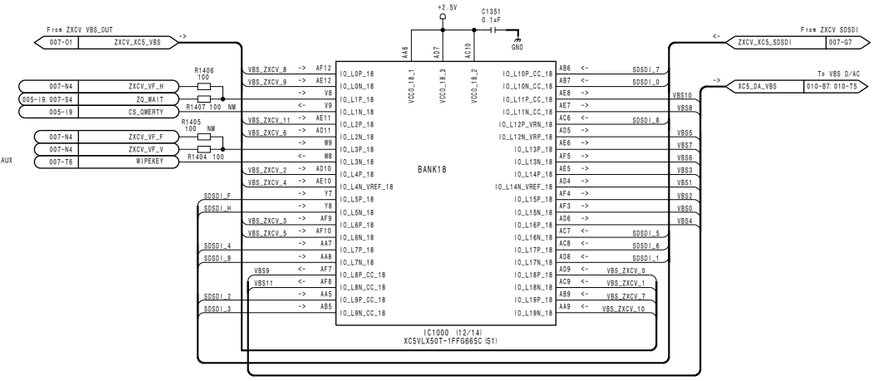

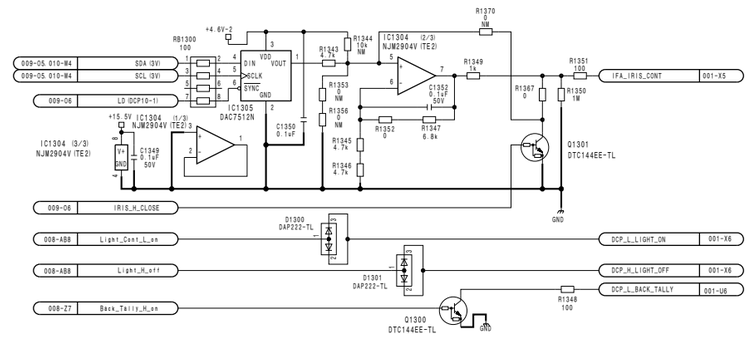


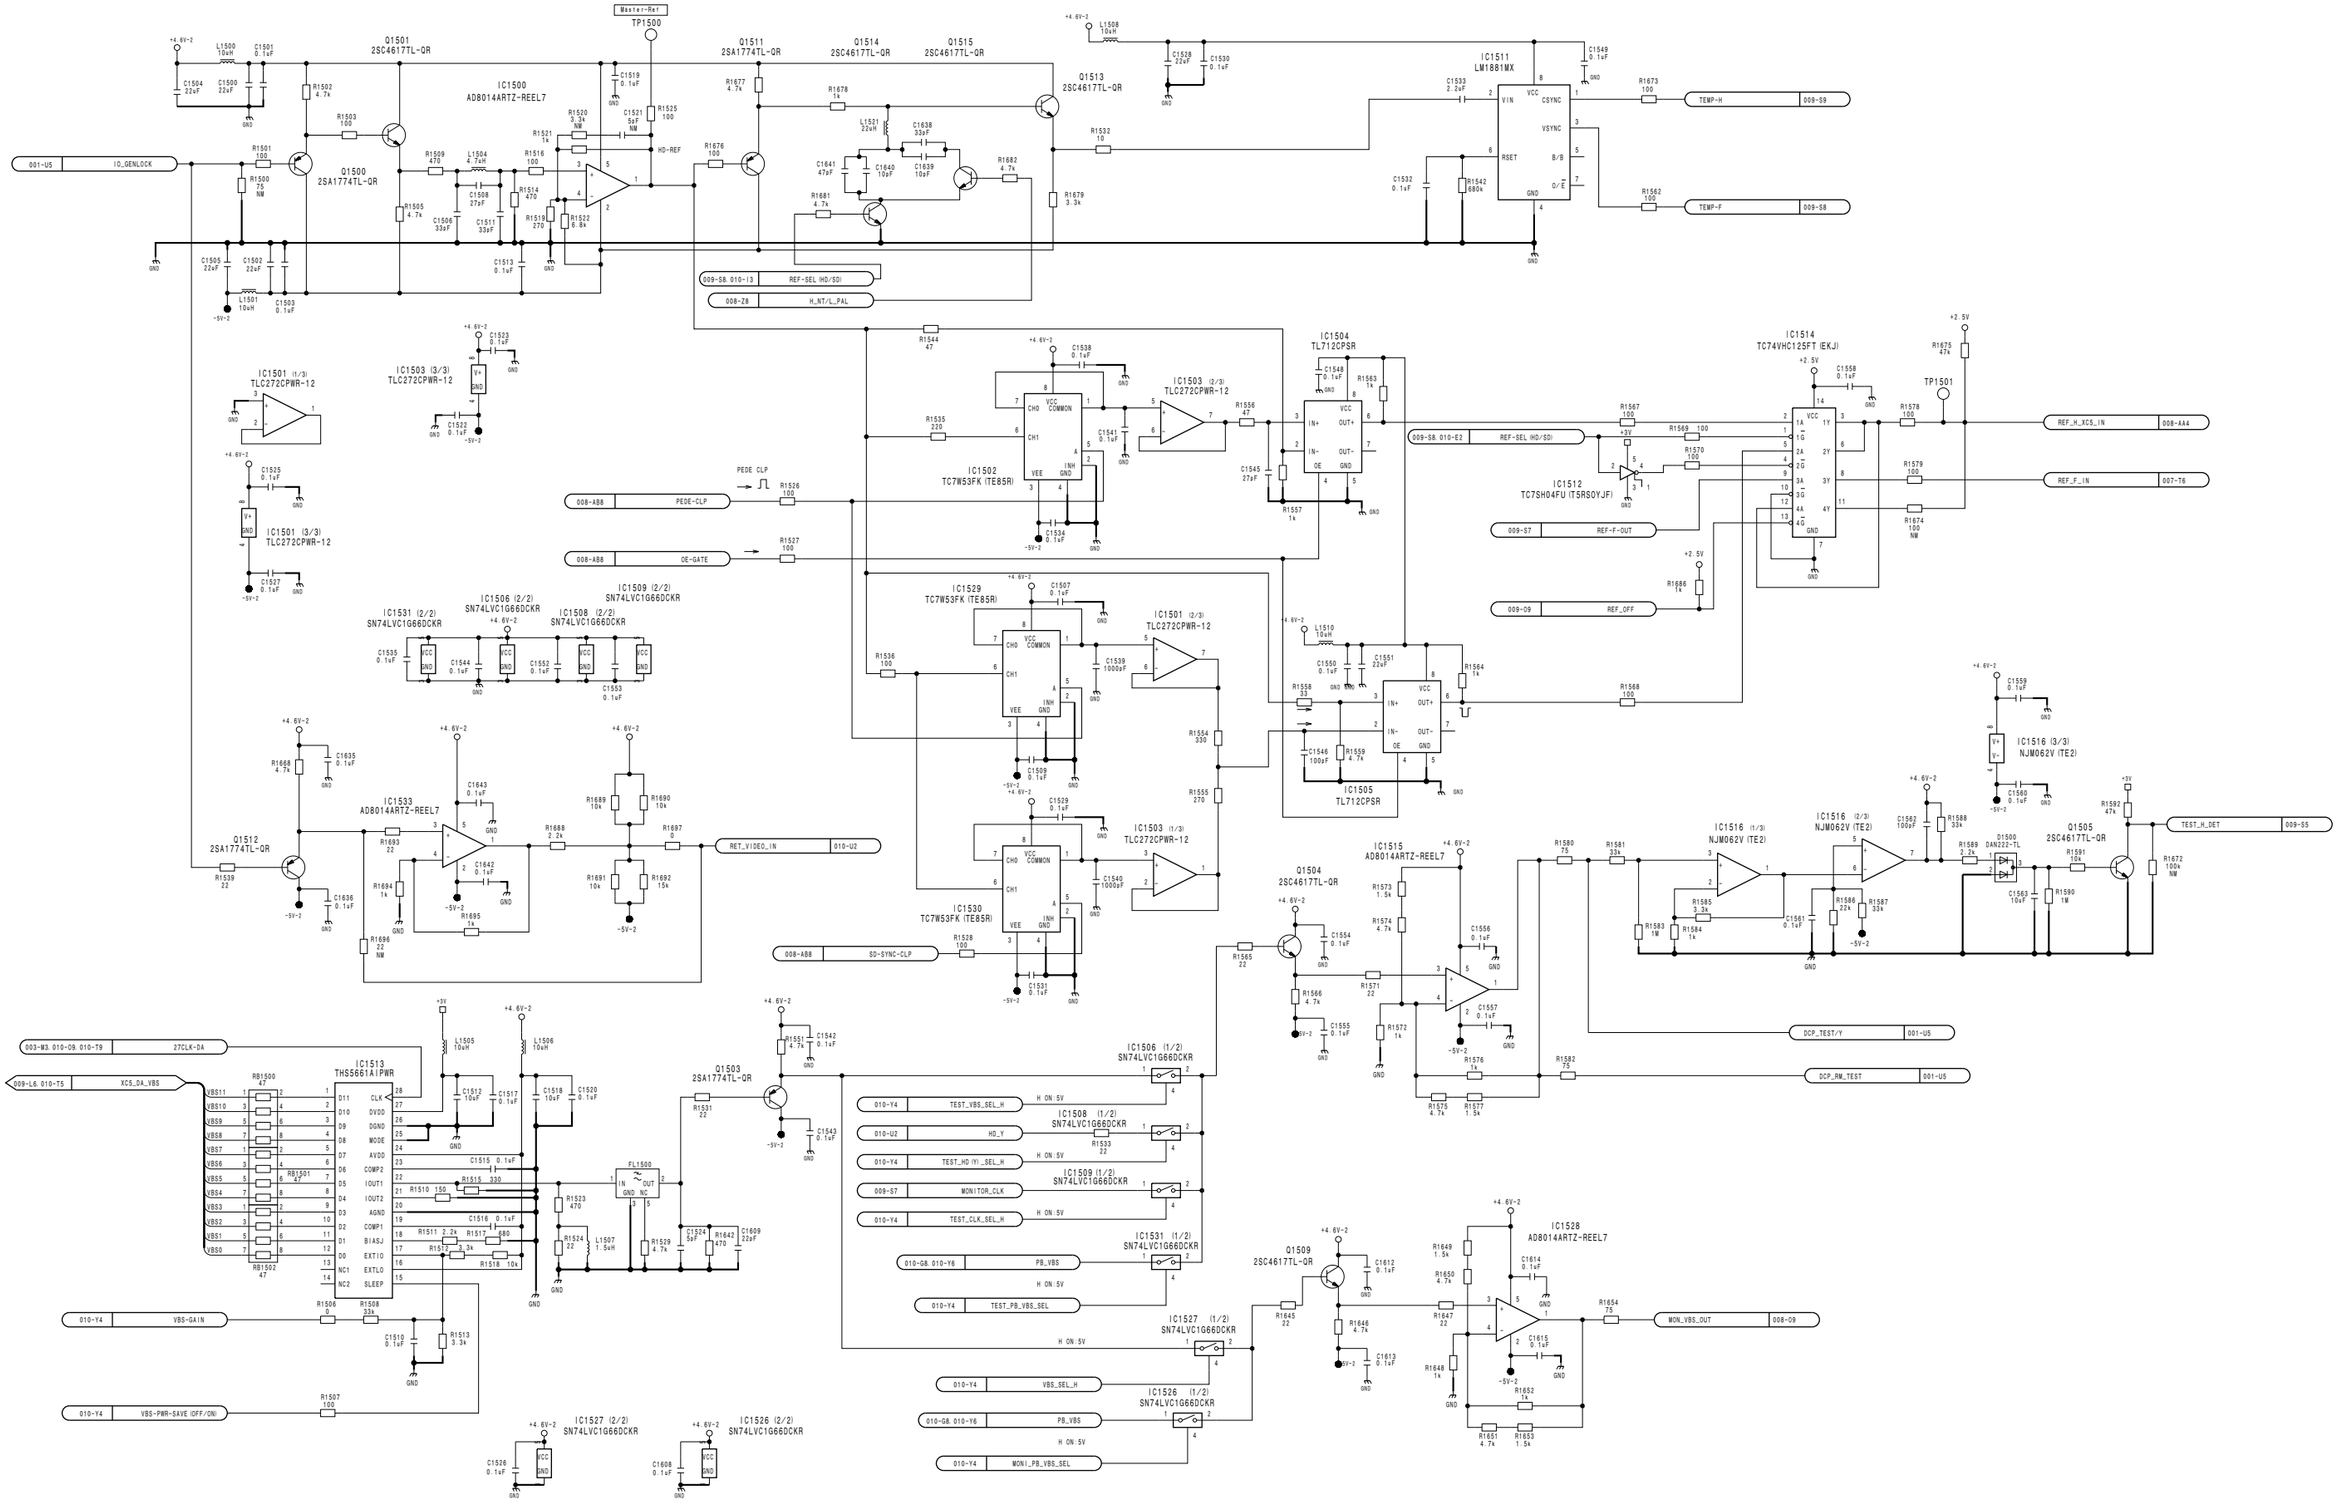
IC1500 AD8014ARTZ-REEL7
Q1501 2SC4617TL-QR
Q1500 2SA1774TL-QR
Q1511 2SA1774TL-QR
Q1514 2SC4617TL-QR
Q1515 2SC4617TL-QR
Q1513 2SC4617TL-QR
IC1511 LM1881MX
IC1501 (1/3) TLC272CPWR-12
IC1503 (3/3) TLC272CPWR-12
IC1502 TC7W53FK (TE85R)
IC1503 (2/3) TLC272CPWR-12
IC1504 TL712CPSR
IC1505 TL712CPSR
IC1514 TC74VHC125FT (EKJ)
IC1512 TC7SH04FU (T5RS0YJF)
IC1529 TC7W53FK (TE85R)
IC1501 (2/3) TLC272CPWR-12
IC1501 (3/3) TLC272CPWR-12
IC1531 (2/2) SN74LVC1G66DCKR
IC1506 (2/2) SN74LVC1G66DCKR
IC1508 (2/2) SN74LVC1G66DCKR
IC1509 (2/2) SN74LVC1G66DCKR
IC1533 AD8014ARTZ-REEL7
Q1512 2SA1774TL-QR
IC1530 TC7W53FK (TE85R)
IC1503 (1/3) TLC272CPWR-12
IC1516 (3/3) NJM062V (TE2)
IC1516 (1/3) NJM062V (TE2)
IC1516 (2/3) NJM062V (TE2)
IC1515 AD8014ARTZ-REEL7
Q1504 2SC4617TL-QR
Q1500 DAN222-TL
Q1505 2SC4617TL-QR
IC1513 THS5661AIPWR
Q1503 2SA1774TL-QR
IC1506 (1/2) SN74LVC1G66DCKR
IC1508 (1/2) SN74LVC1G66DCKR
IC1509 (1/2) SN74LVC1G66DCKR
IC1531 (1/2) SN74LVC1G66DCKR
IC1527 (1/2) SN74LVC1G66DCKR
IC1526 (1/2) SN74LVC1G66DCKR
Q1509 2SC4617TL-QR
IC1528 AD8014ARTZ-REEL7
IC1527 (2/2) SN74LVC1G66DCKR
IC1526 (2/2) SN74LVC1G66DCKR
001-U5 IO_GENLOCK
Master-Ref TP1500
HD-REF
009-S8, 010-I3 REF-SEL HD/SD
008-Z8 H_NT/L_PAL
TEMP-H 009-S9
TEMP-F 009-S8
009-S8, 010-E2 REF-SEL HD/SD
009-S7 REF-F-OUT
009-O9 REF_OFF
REF_H_XCS_IN 008-AA4
REF_F_IN 007-T6
PEDE CLP
008-AB8 PEDE-CLP
008-AB8 OE-GATE
008-AB8 SD-SYNC-CLP
003-M3, 010-O9, 010-T9 27CLK-DA
009-L6, 010-T5 XCS_DA_VBS
010-Y4 VBS-GAIN
010-Y4 VBS-PWR-SAVE (OFF/ON)
RET_VIDEO_IN 010-U2
010-Y4 TEST_VBS_SEL_H
010-U2 HD_Y
010-Y4 TEST_HD (Y)_SEL_H
009-S7 MONITOR_CLK
010-Y4 TEST_CLK_SEL_H
010-G8, 010-Y6 PB_VBS
010-Y4 TEST_PB_VBS_SEL
010-Y4 VBS_SEL_H
010-G8, 010-Y6 PB_VBS
010-Y4 MONI_PB_VBS_SEL
MON_VBS_OUT 008-O9
DCP_TEST/Y 001-U5
DCP_RW_TEST 001-U5
TEST_H_DET 009-S5
TP1501
H ON:5V

DCP-49A (10/10)

SUFFIX: -11

DCP-49A (10/10)
SUFFIX: -11

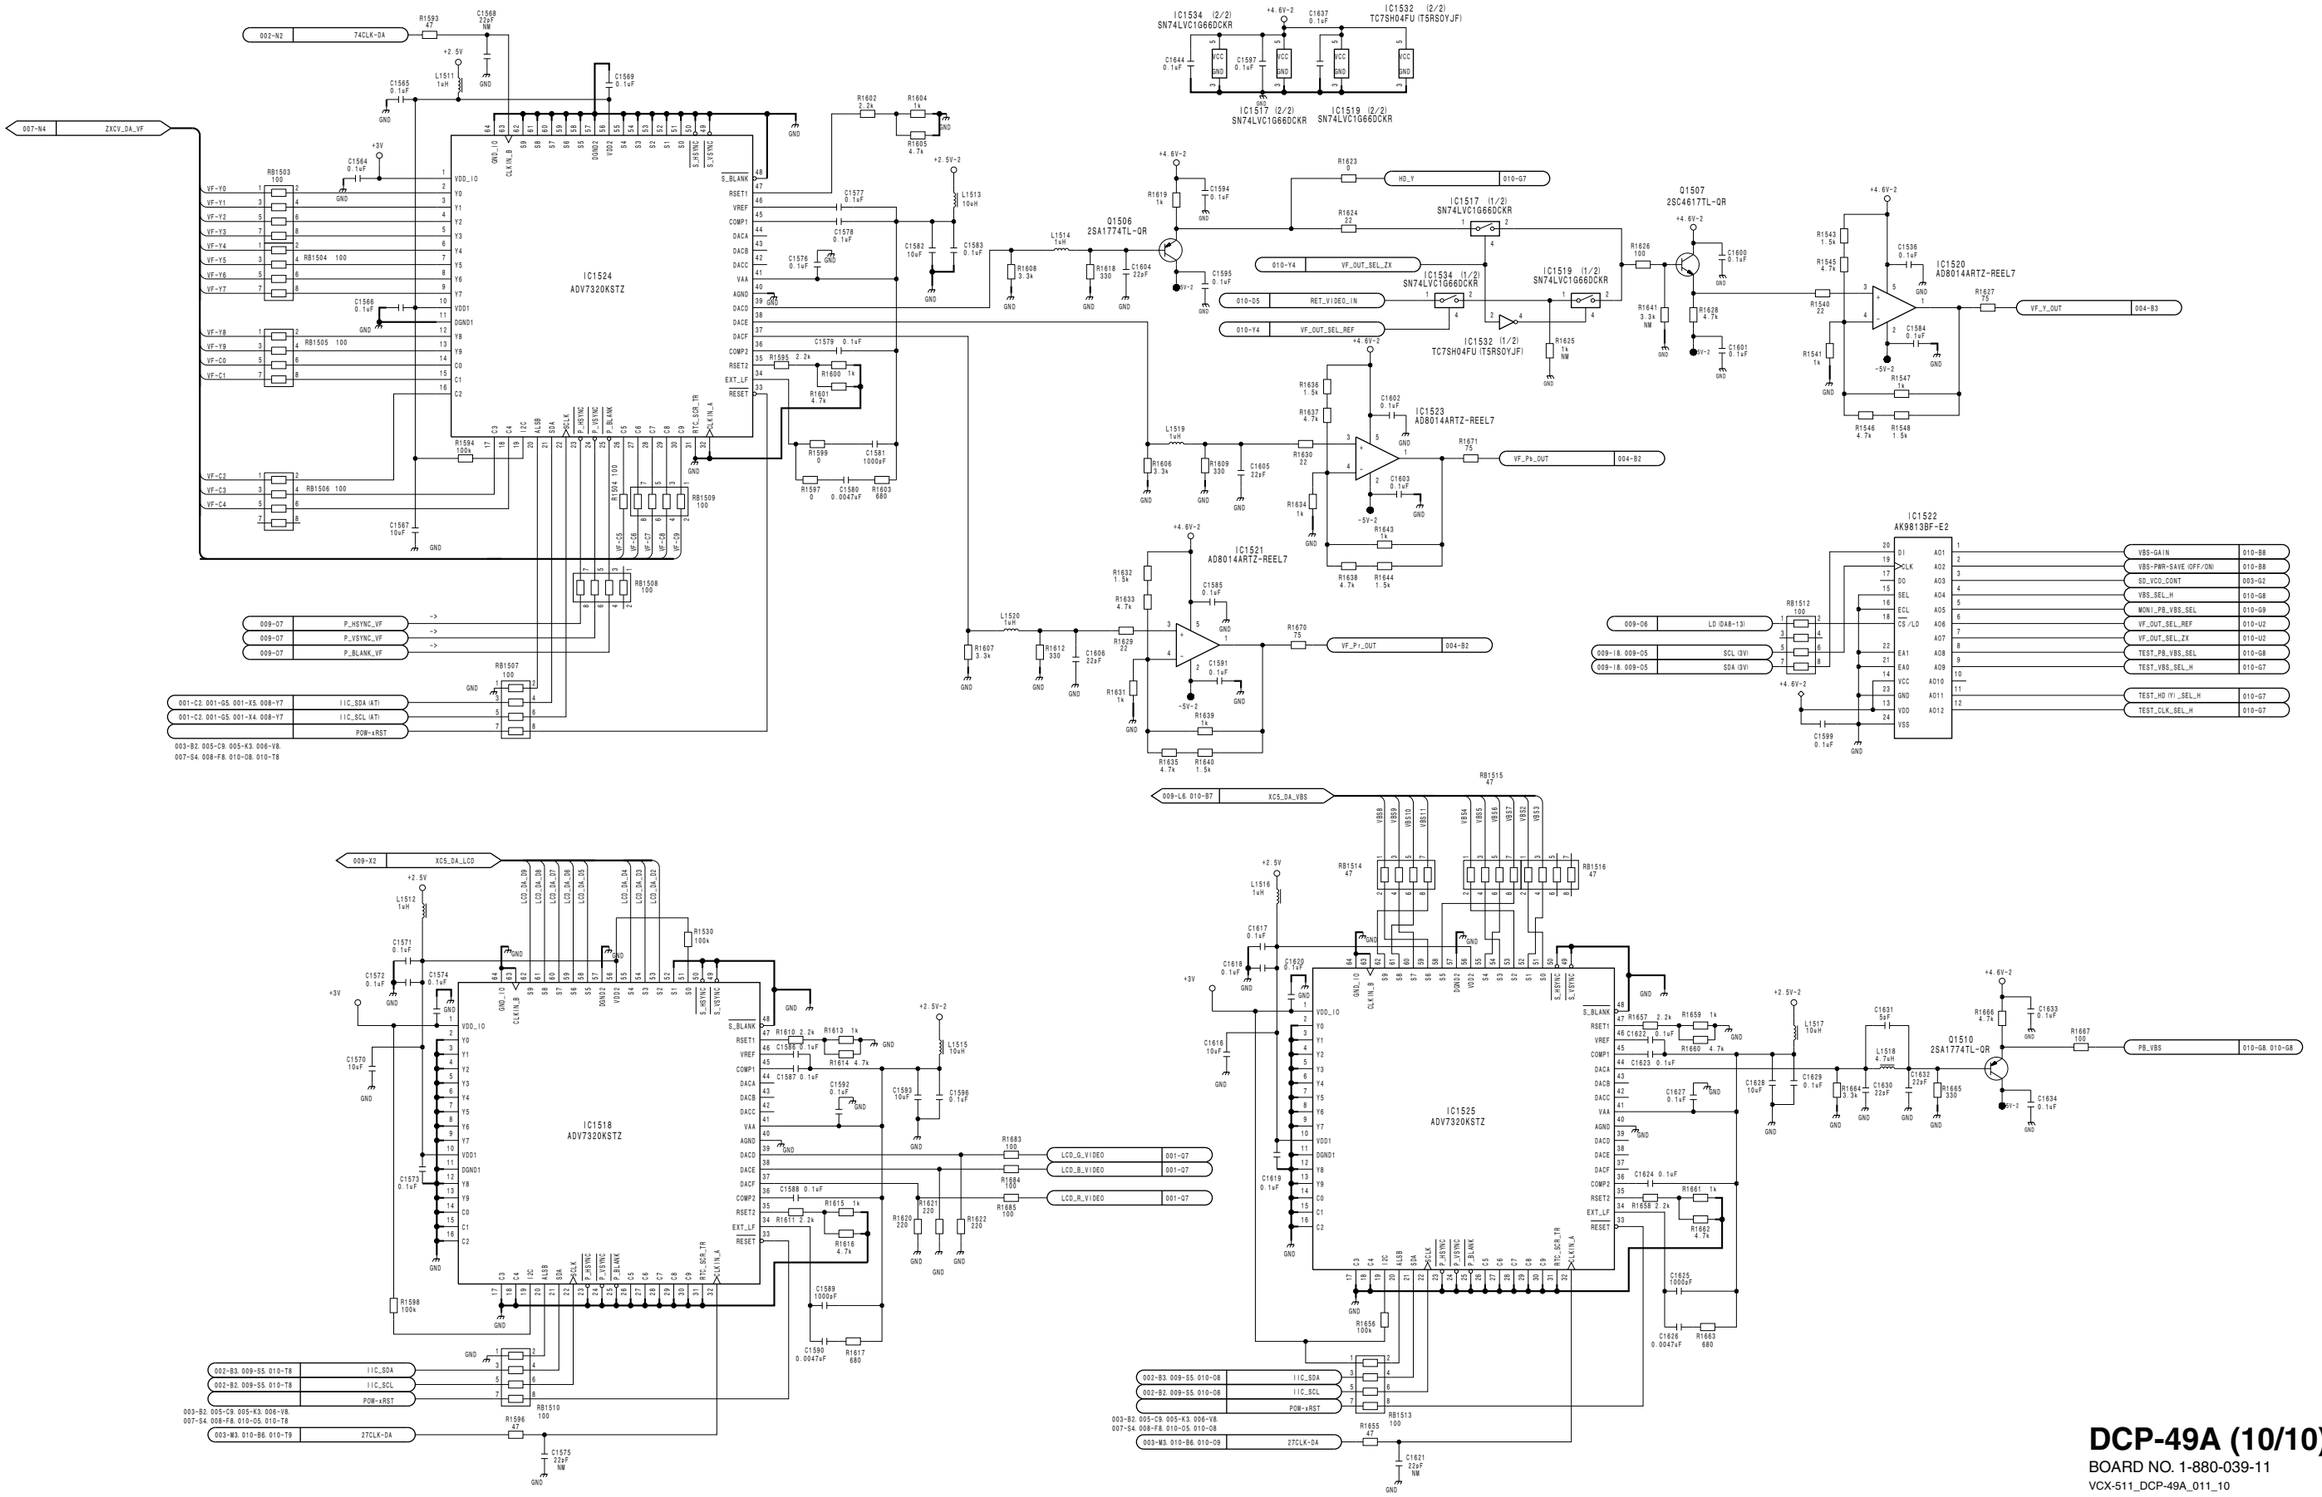


DCP-49A (10/10)

BOARD NO. 1-880-039-11

VCX-511_DCP-49A_011_10

DET-45, DET-47
SUFFIX: -11 SUFFIX: -11

PANEL REVERSE

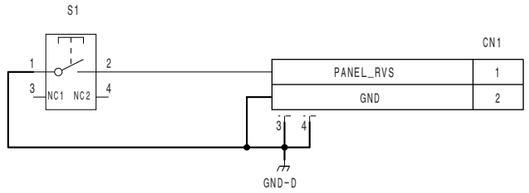


FP

DET-45

BOARD NO. 1-876-834-11

VCX-434_DET-45_011_1

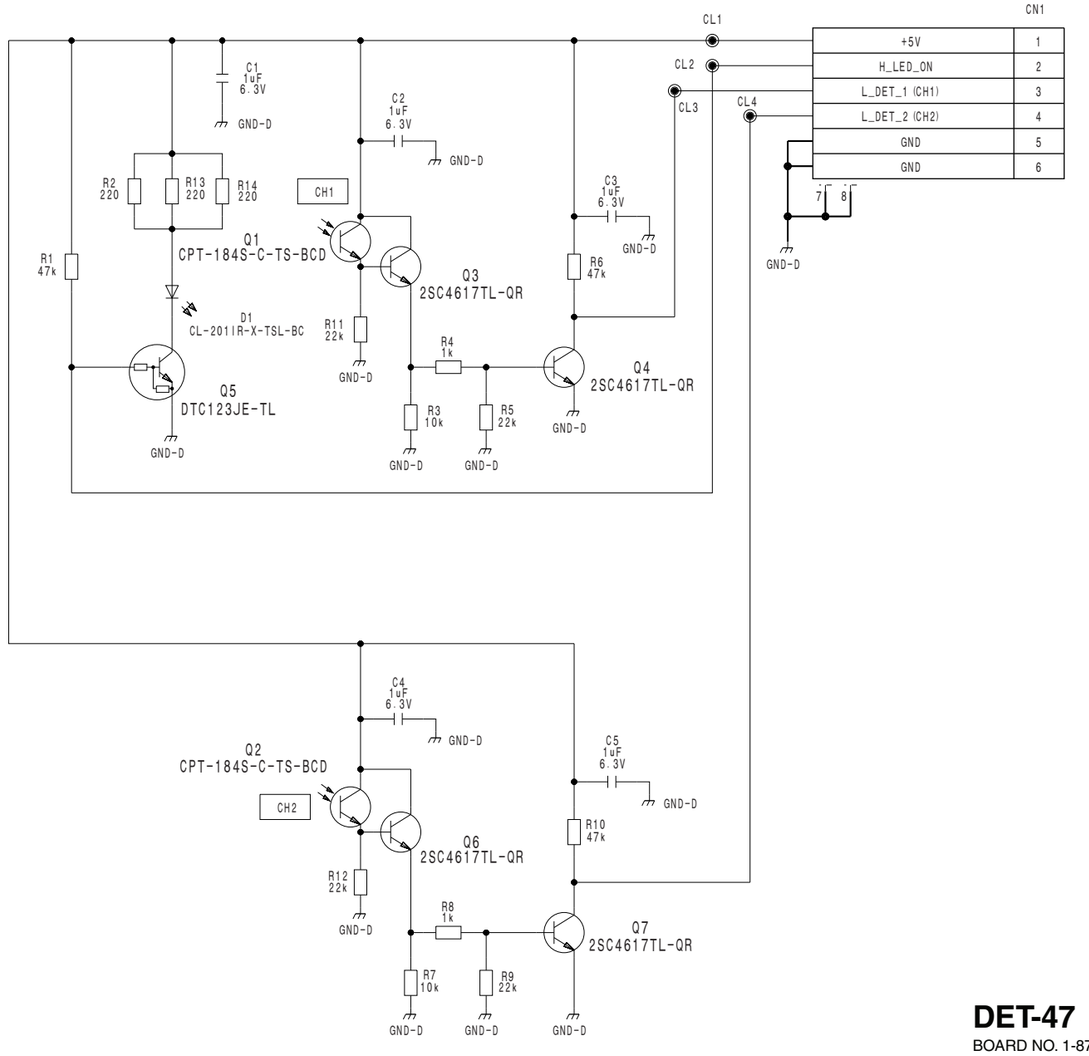


DET-47

BOARD NO. 1-876-840-11


VCX-434_DET-47_011_1

DR-606 (1/7)
SUFFIX: -11


OP

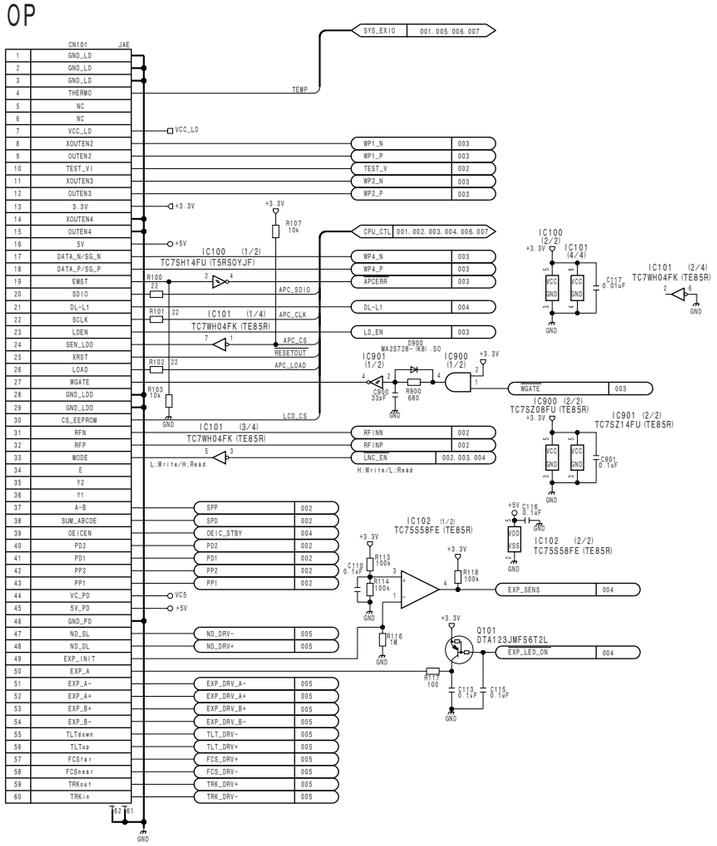


Vcc-LD

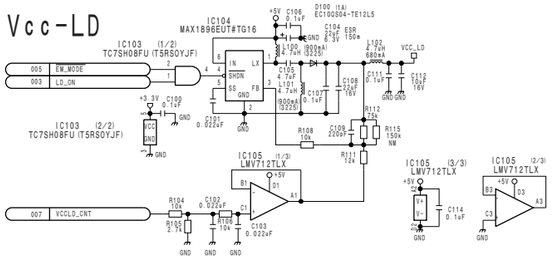


ATA/232C/BOOT/JK

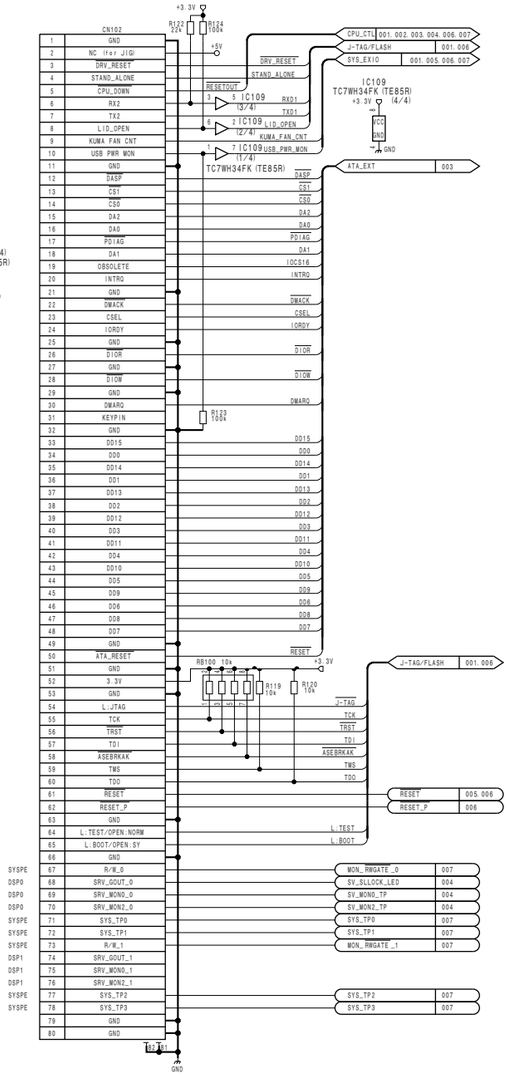


POWER

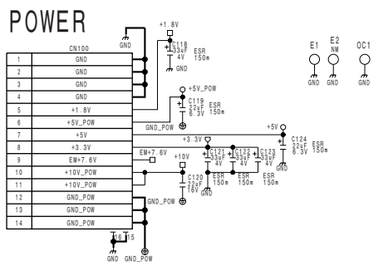


SE-857 (SPDL/LDR/FAN/ACC/GYRO) (EEPROM/DEW/SW/PH)

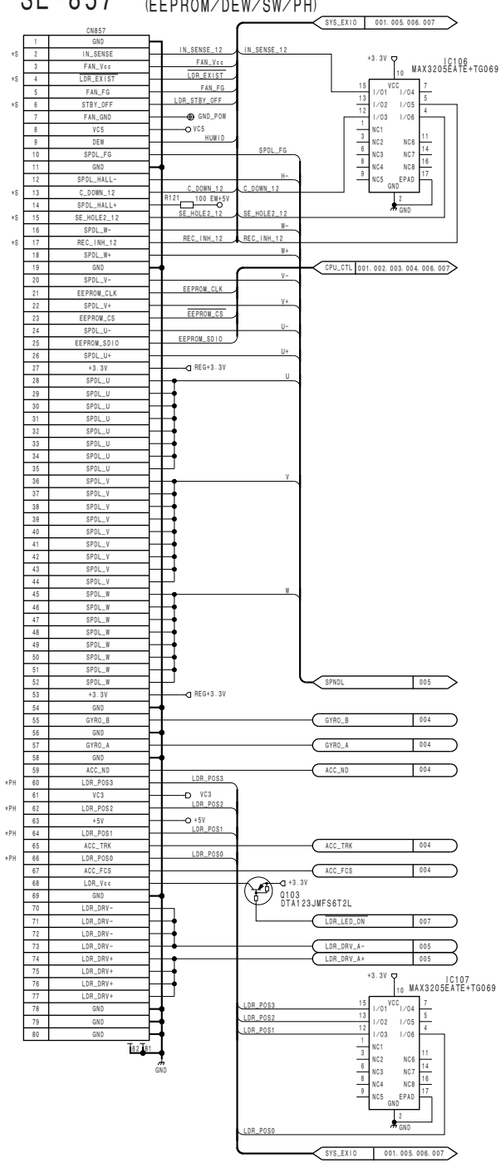


SE-858 (SLD/KY/SW/PH)

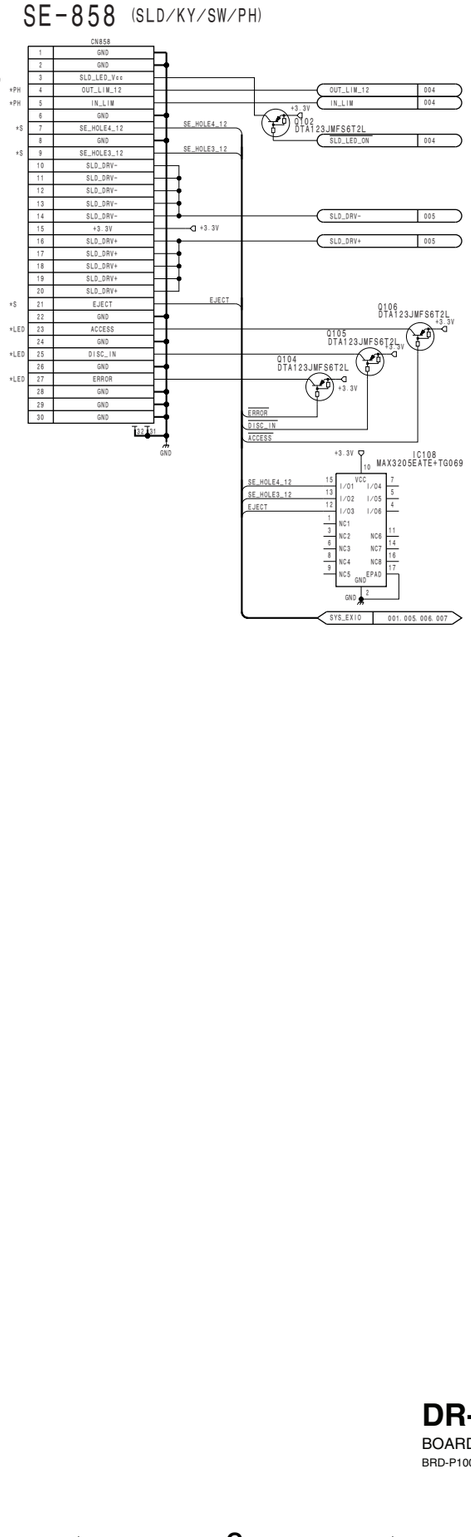

DR-606 (2/7)
SUFFIX: -11

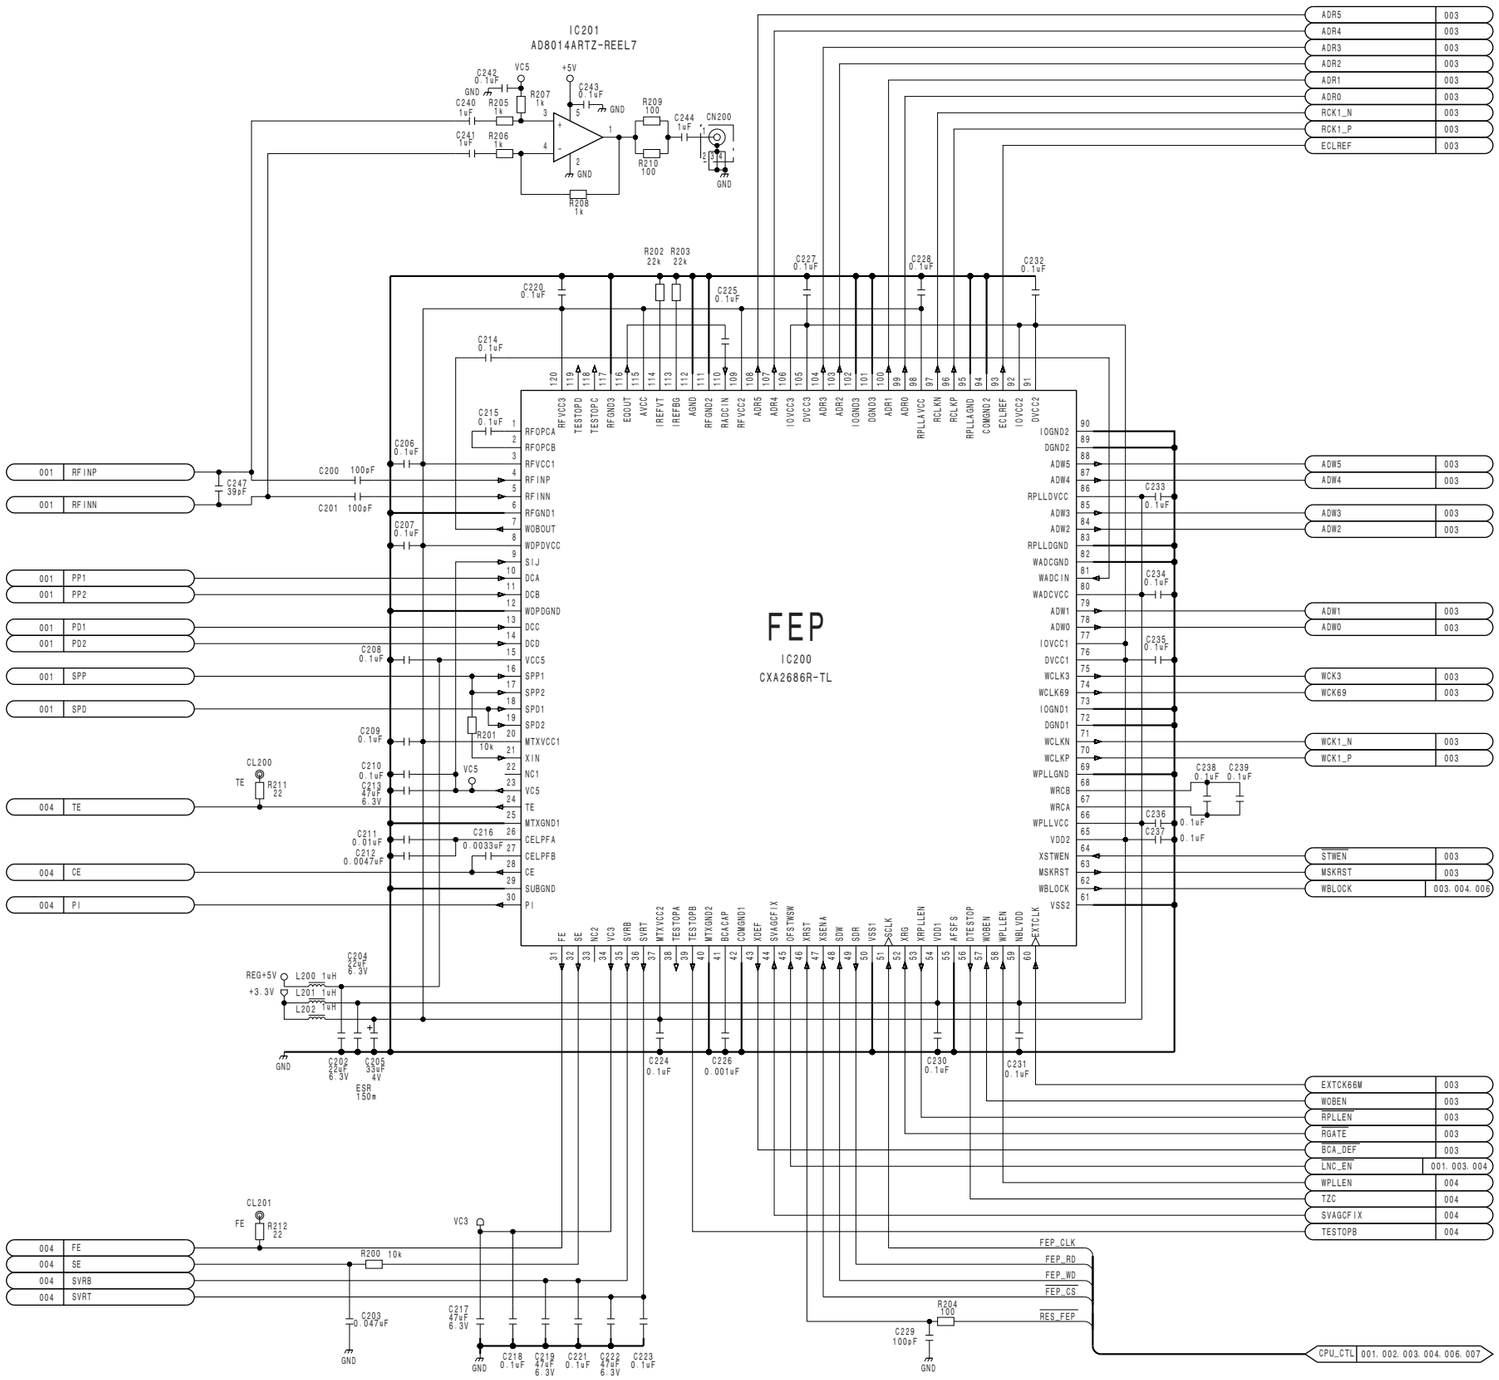


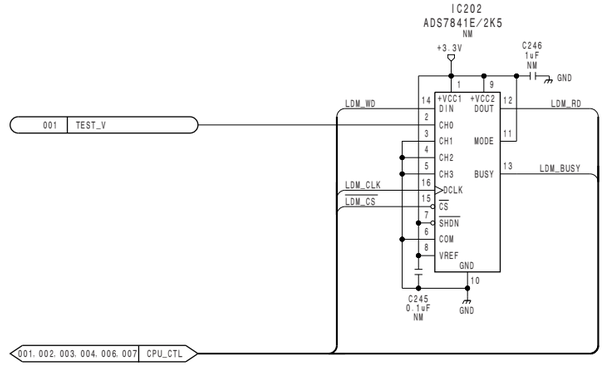

DR-606 (2/7)
BOARD NO. 1-875-666-11
BRD-P100P200_DR-606_011_2

3-36

PDW-F800/V2 (J,E)

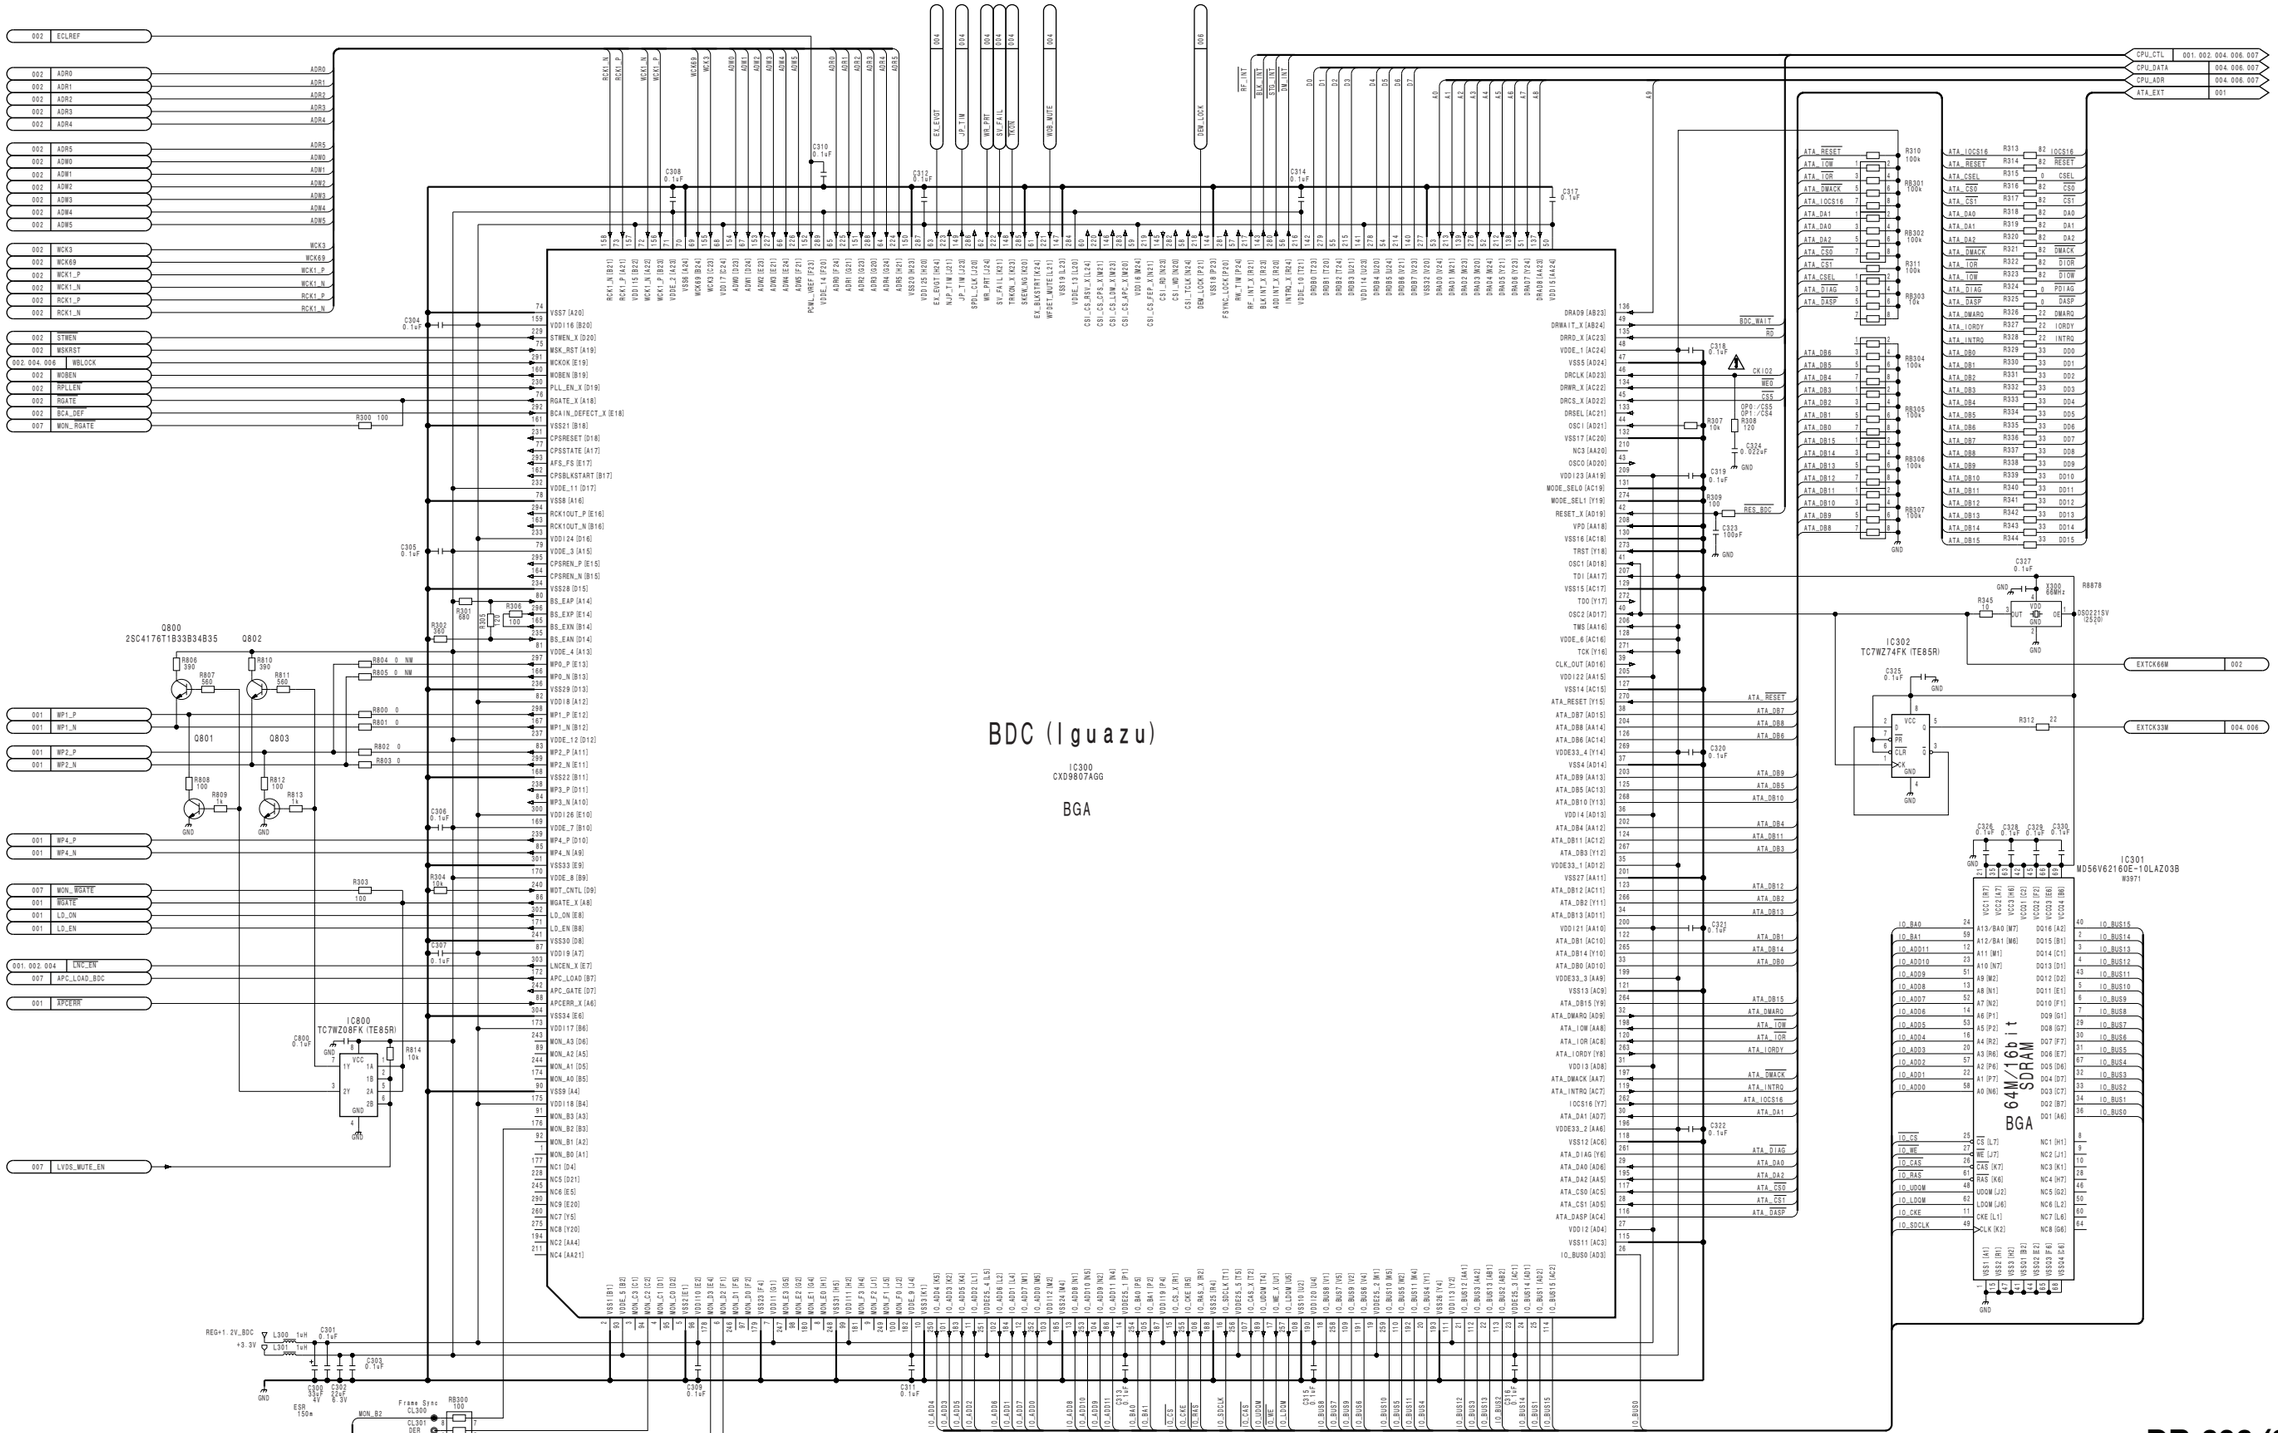
BDC (Iguazu)
IC300
CXD9807AGG
BGA
IC302
TC7WZ74FK (TE85R)
IC301
MD56V62160E-10LAZ03B
#3971
64M/16bit
SDRAM
BGA
IC800
TC7WZ08FK (TE85R)
Q800
2SC4176T1B33B34B35
Q801
Q802
Q803
CPU_CTL
CPU_DATA
CPU_ADR
ATA_EXT
EXTCK66M
EXTCK33M
REG+1.2V_BDC
+3.3V
Frame Sync
CL300
DER
RESET
CSEL
CS0
CS1
DA0
DA1
DA2
DMACK
IOR
IOW
INTRQ
IOCS16
DIAG
DASP
DMARQ
IORDY
DD0
DD1
DD2
DD3
DD4
DD5
DD6
DD7
DD8
DD9
DD10
DD11
DD12
DD13
DD14
DD15

DR-606 (4/7) **SUFFIX: -11**

SV-DSP

IC400
TMC320BRD01

IC401
SN74LVCH16374AZQLR
BGA

IC402 (3/3) LMV712TLX
IC402 (1/3) LMV712TLX
IC402 (2/3) LMV712TLX
IC403 (3/3) LMV712TLX
IC403 (1/3) LMV712TLX
IC403 (2/3) LMV712TLX
IC404 TC74HC4052AFT (EL)
IC405 (2/2)
IC405 (1/2) TC7SH08FU (T5RSOYJF)
IC406 NJU7777F4-33 (TE2) 150mA ->
IC407 (1/2) TC7SET04FU (T5RSOJF)
IC407 (2/2)
IC408 (1/2) TC7SET04FU (T5RSOJF)
IC408 (2/2)
IC409 (1/2) TC7SET04FU (T5RSOJF)
IC409 (2/2)
IC411 (1/2) TC7SH14FU (T5RSOYJF)
IC411 (2/2)
IC412 (2/2)
IC413 (1/2) TC7SH14FU (T5RSOYJF)
IC413 (1/2) TC7SH32FU (T5RSOYJF)
IC413 IC414 (2/2)
IC414 (1/2) TC7SH04FU (T5RSOYJF)

R431/R433=> A side

REG+5V
REG+3.3V
+1.8V
+10V

CPU_ADR
CPU_DATA
CPU_CTL
EXTCK33M
SVRT
SVRB
TESTOPB
SE
CE
TE
FE
PI
LNC_EN
ACC_TRK
ACC_FCS
GYRO_A
GYRO_B
ACC_ND
HALL_FG
PRINT_FG
DSP_PG
FCS_CURRENT_DET
TRK_CURRENT_DET


FCONT
TKCNT
EXP_CNT_A
EXP_CNT_B
TLT_CNT
SLD_CNT
CNT_VC_LPF
VBIN_LPF
SV_MONO_TP
DSP_SP_CNT
SV_MON2_TP
IN_LIM
OUT_LIM_12
SV_SLLOCK_LED
SV_TKLOCK
SV_FCLOCK
RF_SP_LOCK
DSP_SYSHOLD
SV_FAIL
EX_EVGT
CPU_CTL
CALPOL
EXP_SENS
DSP_SV_GIO_INT
WBLOCK
ND_CNT
JP_TIM
SYSHOLD
SYS_SYSHOLD
TZC

WPLLEN
WVS_MUTE
WR_PRT
TKVN
ND_PS
SVSAGFIX
OEIC_STBY
SA_NO_STBY
DSP_SP_PS
DSP_SP_SB
DL-L-I
FTURN_MUTE
SLD_LED_ON
EXP_LED_ON


DR-606 (4/7)
BOARD NO. 1-875-666-11
BRD-P100P200_DR-606_011_4

PDW-F800/V2 (J,E)


EM

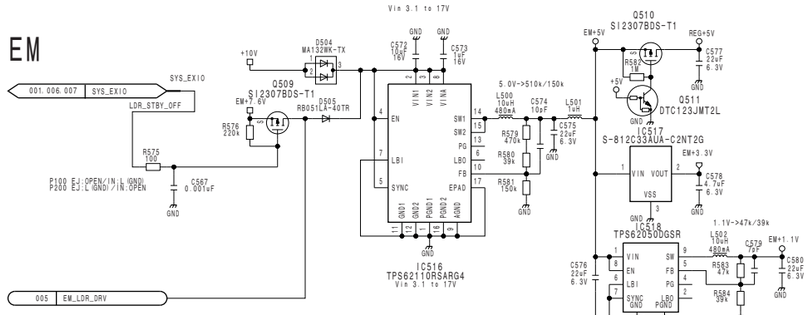


SPDL

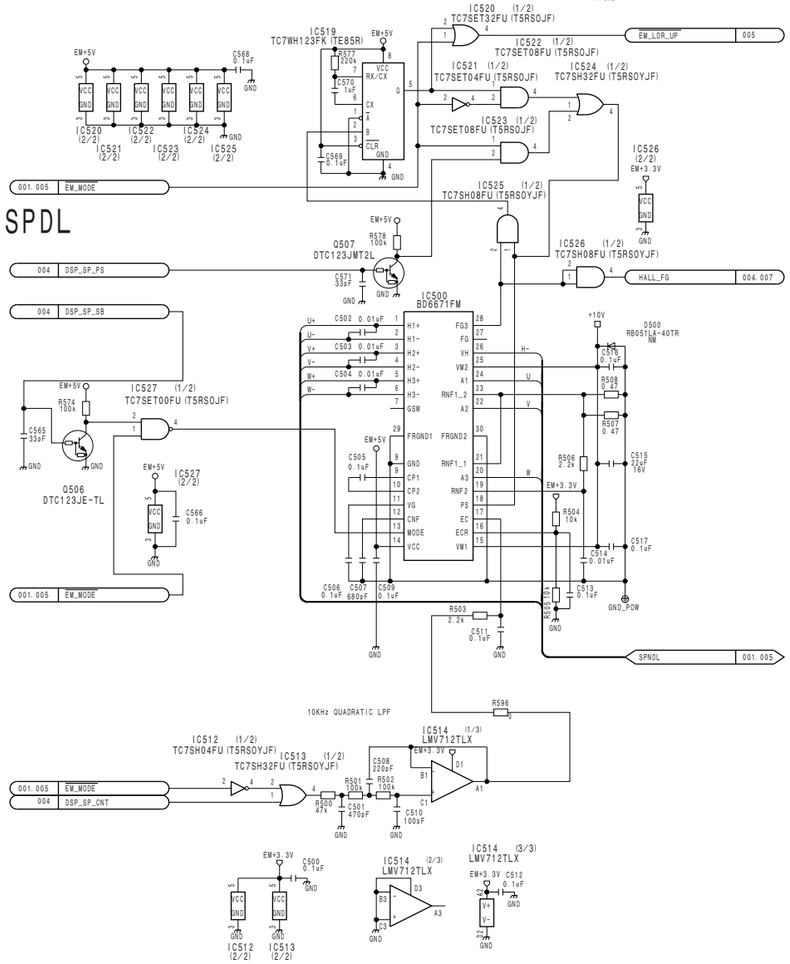

FCS0/TRK

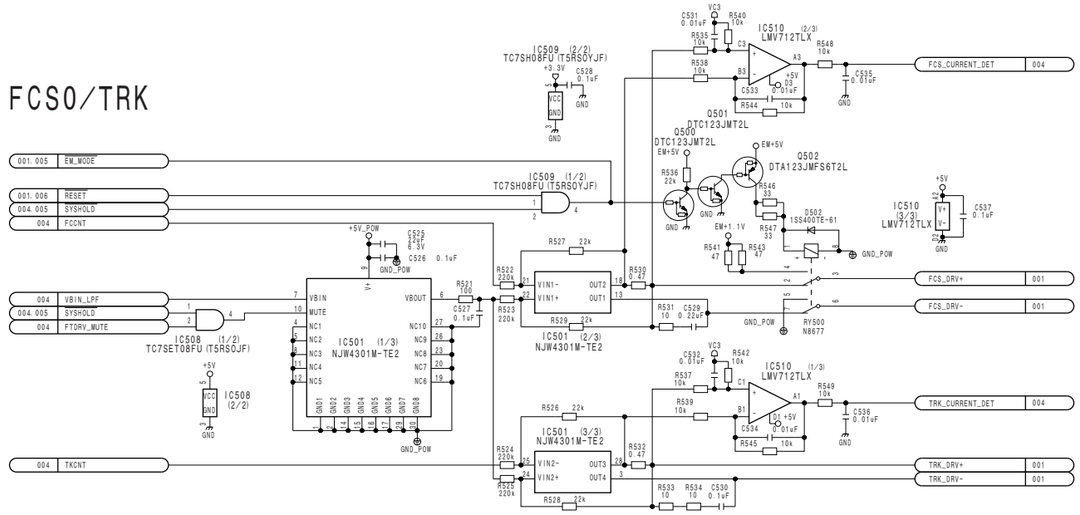


EXP/ND

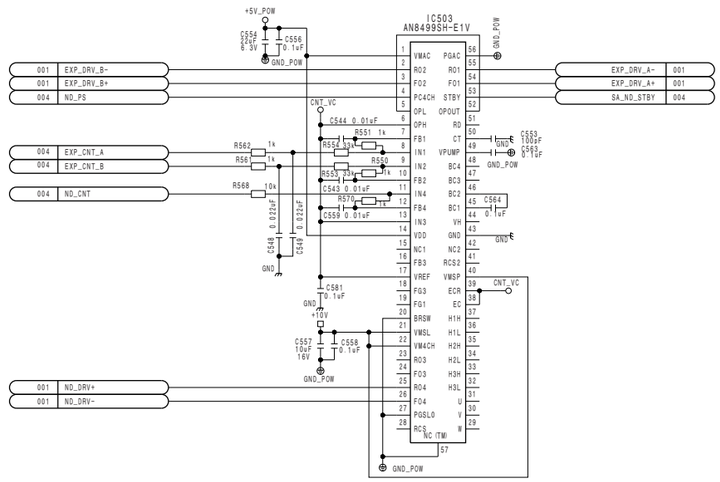


SPDL-FG




SLD/TLT/LDR

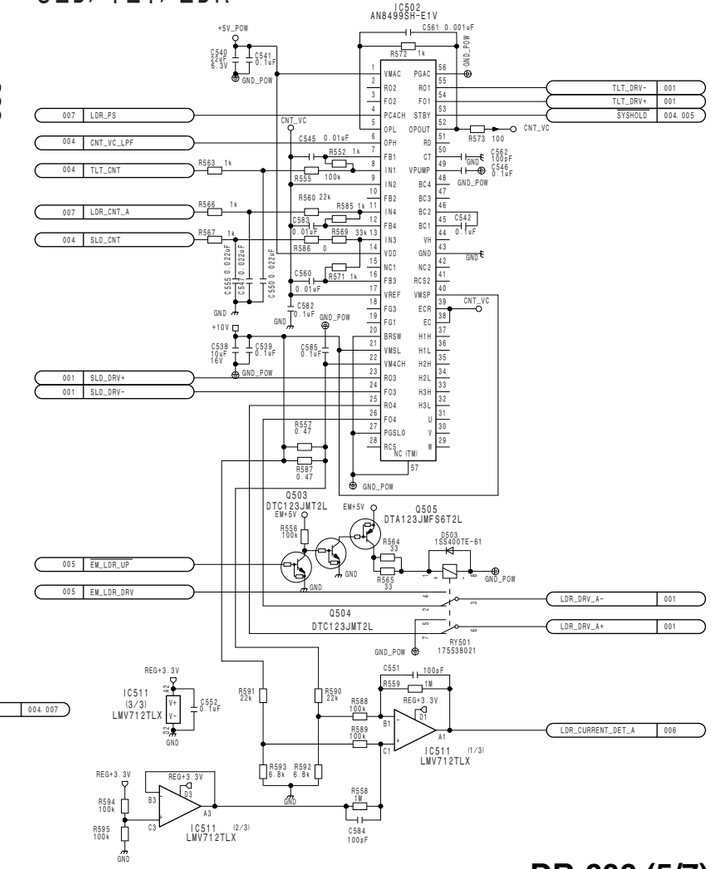



DR-606 (5/7)
BOARD NO. 1-875-666-11
BRD-P100P200_DR-606_011_5

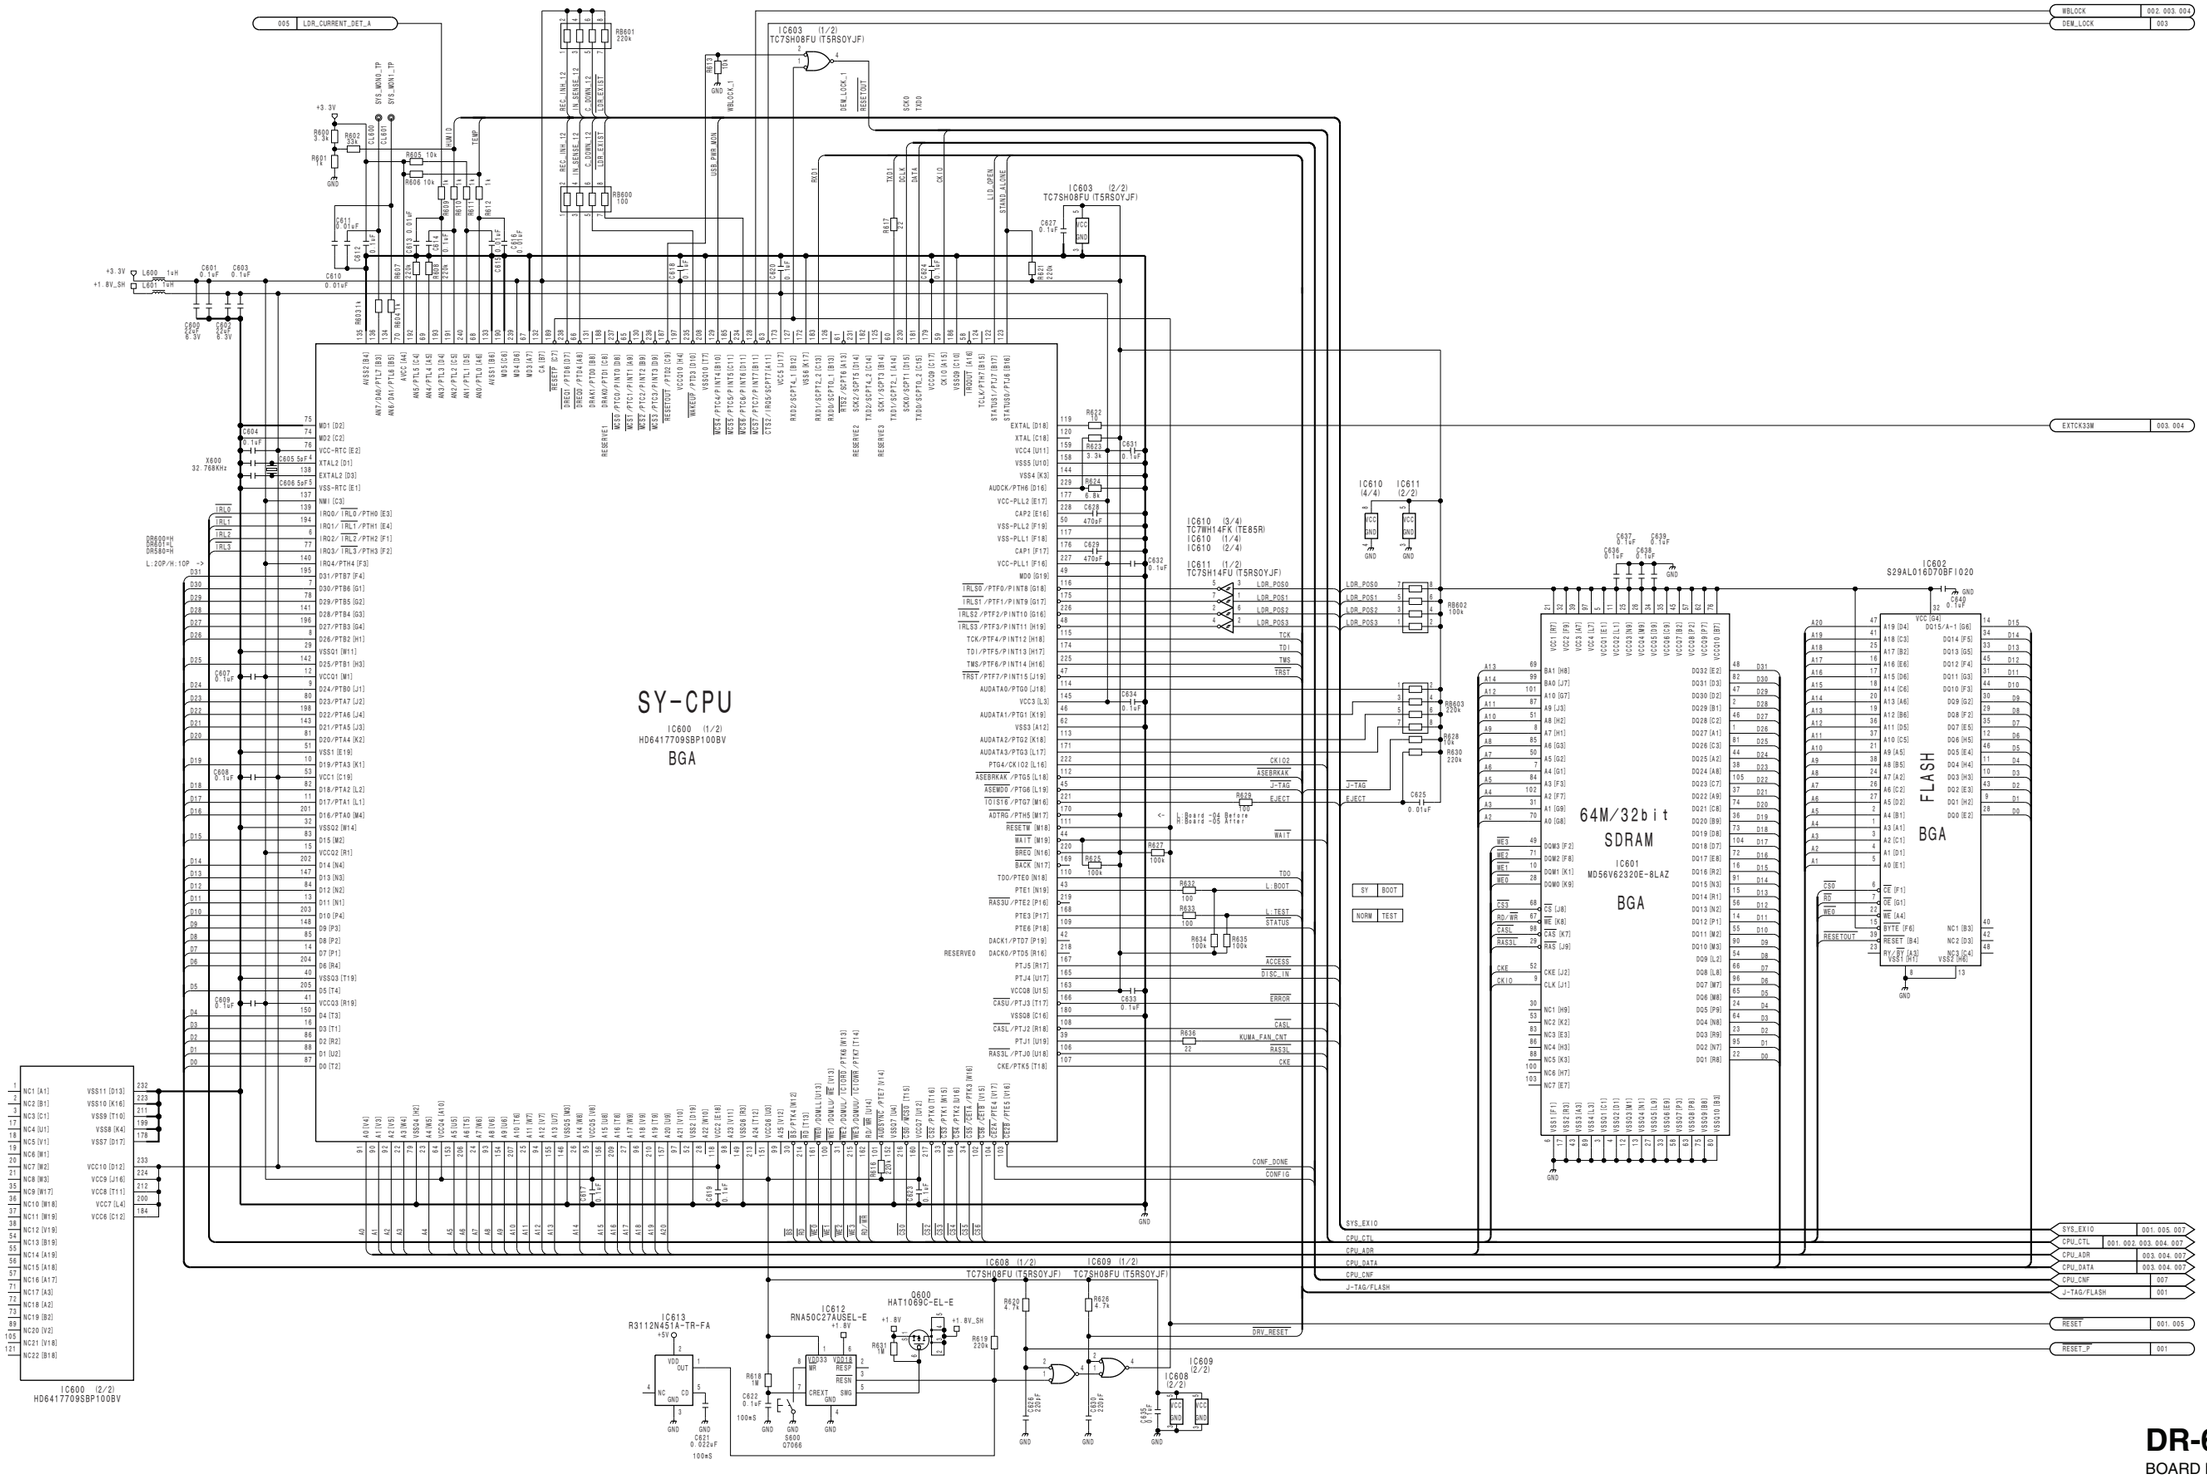

SY-CPU
IC600 (1/2)
HD6417709SBP100BV
BGA
IC600 (2/2)
HD6417709SBP100BV
IC603 (1/2)
TC7SH08FU (T5RSOYJF)
IC603 (2/2)
TC7SH08FU (T5RSOYJF)
IC610 (3/4)
TC7MH14FK (TE85R)
IC610 (1/4)
IC610 (2/4)
IC611 (1/2)
TC7SH14FU (T5RSOYJF)
IC610 (4/4)
IC611 (2/2)
IC602
S29AL016D70BFI020
FLASH
BGA
64M/32bit
SDRAM
IC601
MD56V62320E-8LAZ
BGA
IC608 (1/2)
TC7SH08FU (T5RSOYJF)
IC609 (1/2)
TC7SH08FU (T5RSOYJF)
IC612
RNA50C27AUSEL-E
IC613
R3112N451A-TR-FA
Q600
HAT1089C-EL-E
IC609 (2/2)
IC608 (2/2)
005 LDR_CURRENT_DET_A
WBLOCK 002. 003. 004
DEW_LOCK 003
EXTCK33M 003. 004
SYS_EXIO 001. 005. 007
CPU_CTL 001. 002. 003. 004. 007
CPU_ADR 003. 004. 007
CPU_DATA 003. 004. 007
CPU_CNF 007
J-TAG/FLASH 001
RESET 001. 005
RESET_P 001
SY BOOT
NORM TEST
LDR_POS0
LDR_POS1
LDR_POS2
LDR_POS3
J-TAG
EJECT
WAIT
TDO
L_BOOT
L_TEST
STATUS
ACCESS
DISC_IN
ERROR
CASL
KUMA_FAN_CNT
RAS3L
CKE
CONF_DONE
CONFIG
DRV_RESET
+3.3V
+1.8V_SH
GND
X600
32.768KHz
L:2OP/H:1OP

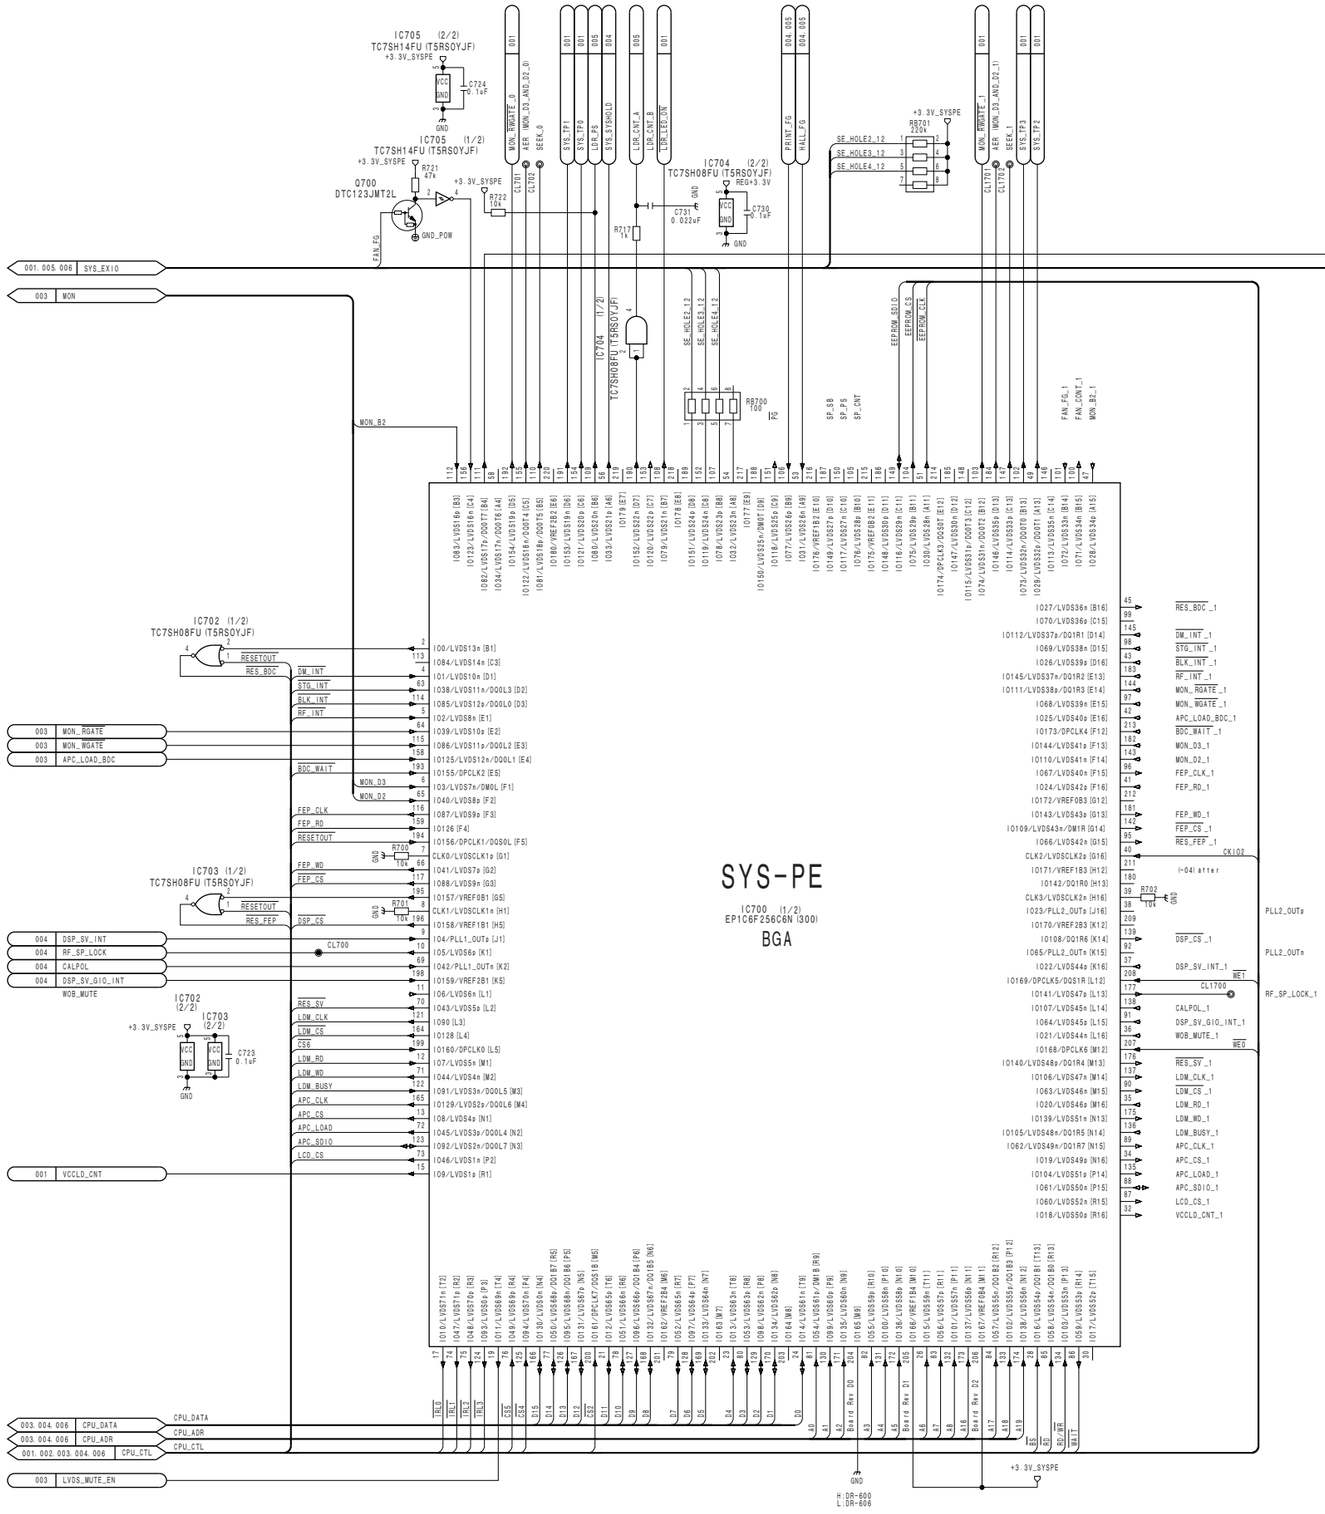



DR-606 (7/7)
BOARD NO. 1-875-666-11
BRD-P100P200_DR-606_011_7

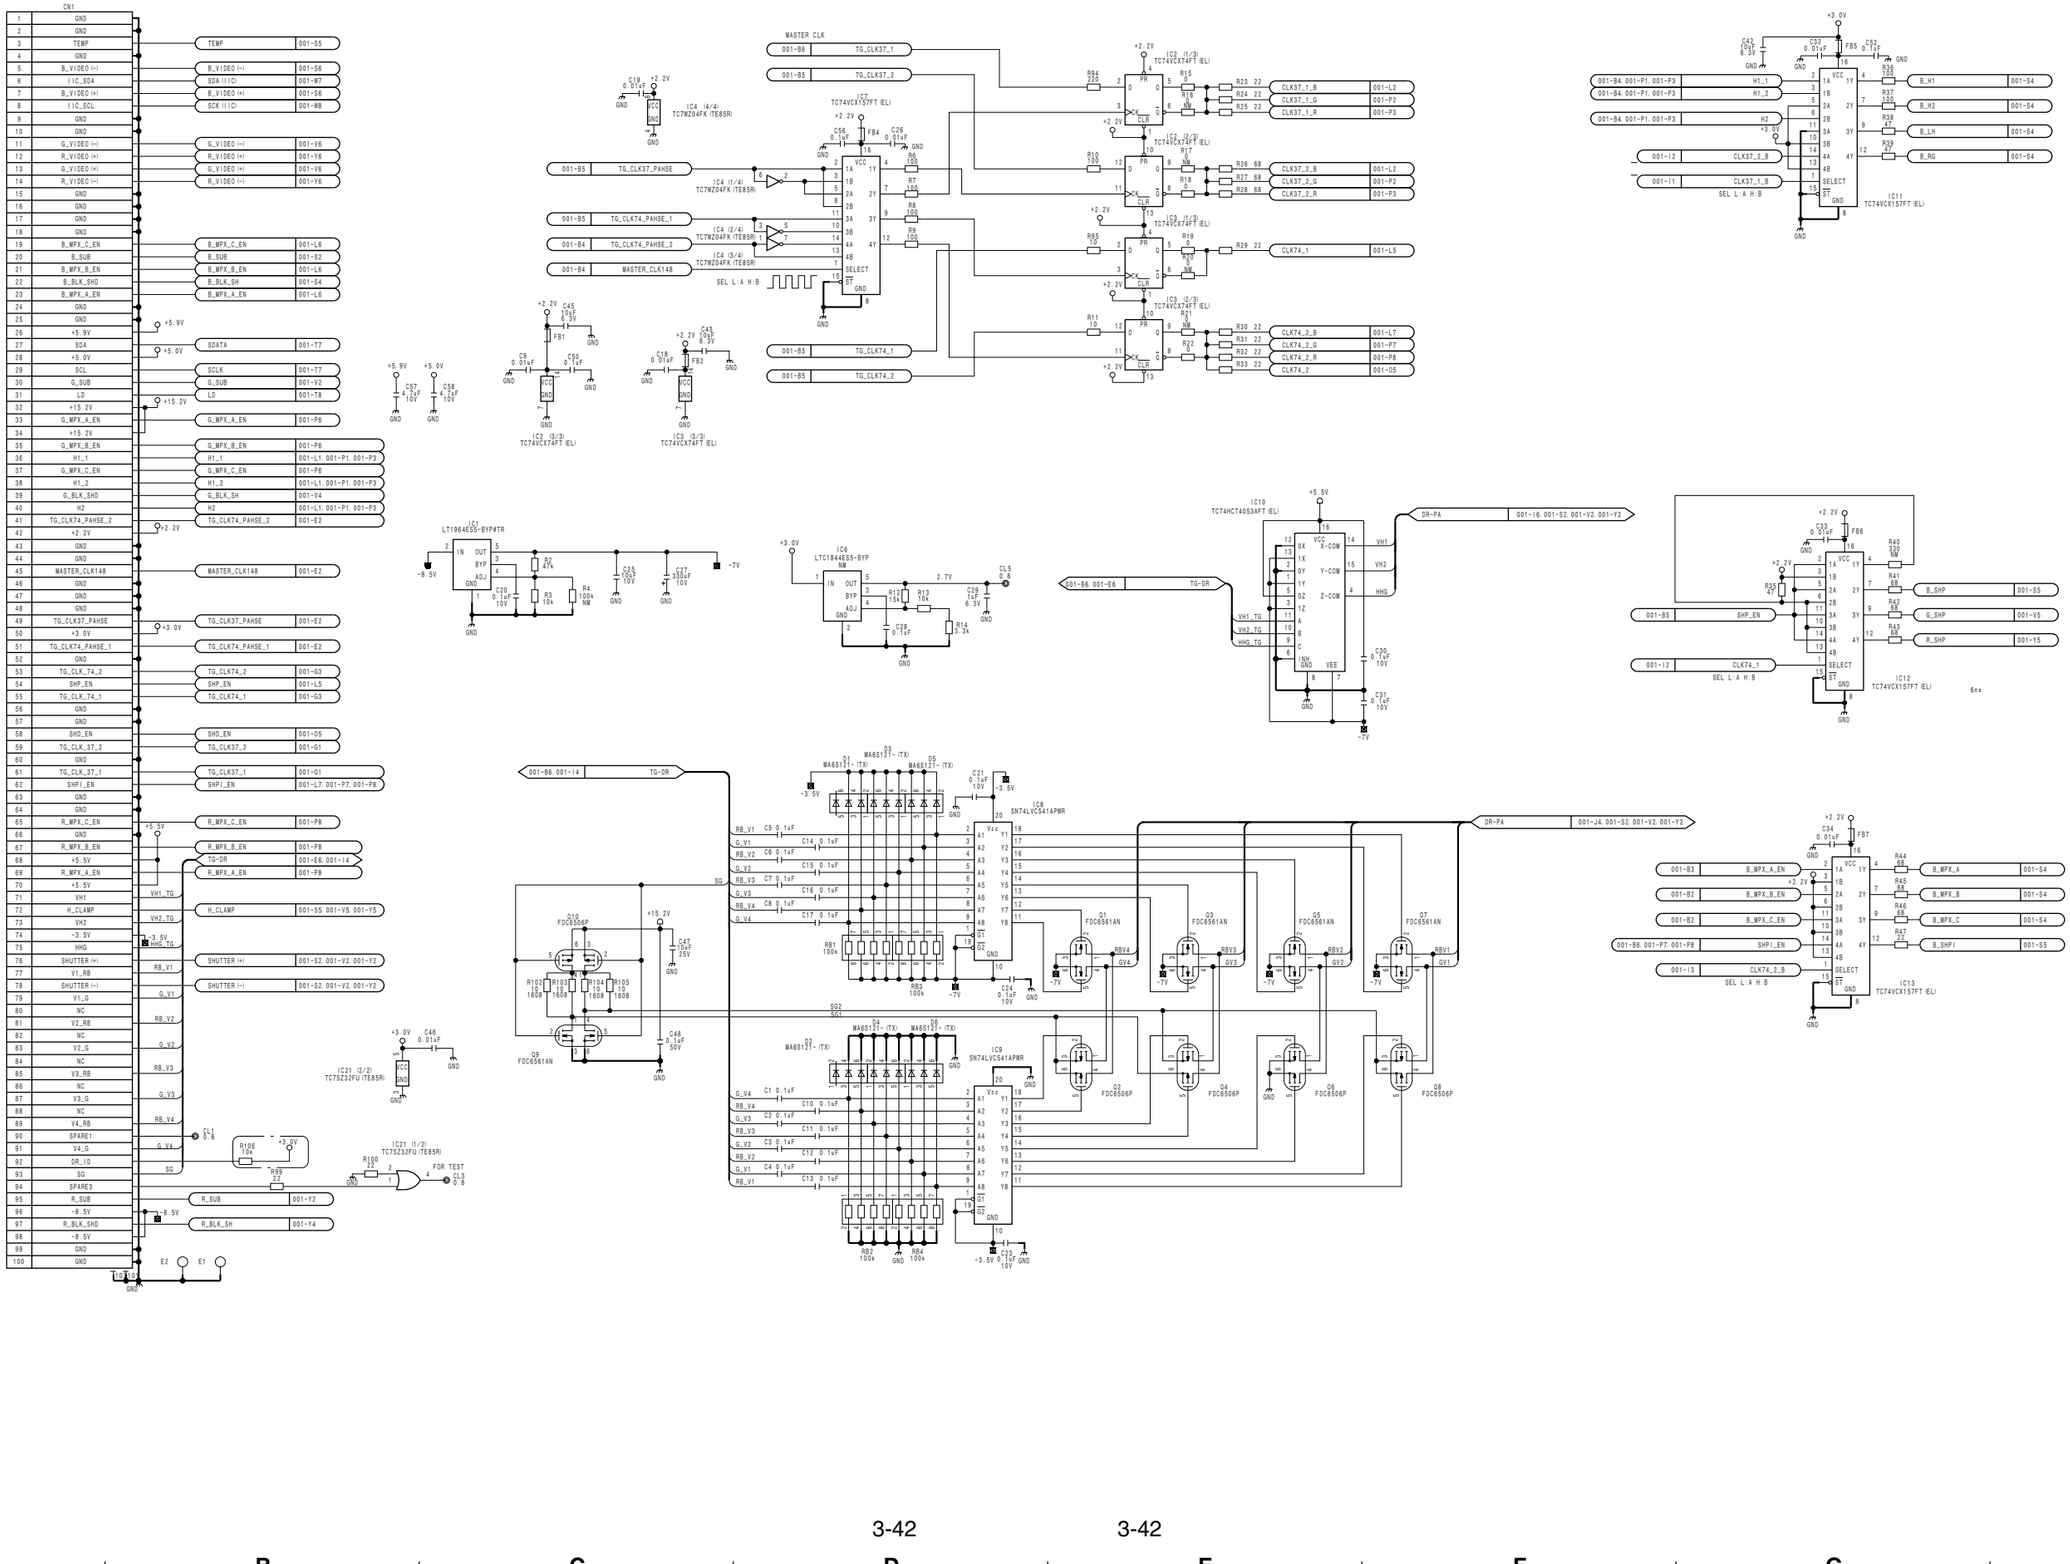

CN1
TEMP
B_VIDEO (-)
I²C_SDA
B_VIDEO (+)
I²C_SCL
G_VIDEO (-)
R_VIDEO (+)
G_VIDEO (+)
R_VIDEO (-)
B_MPX_C_EN
B_SUB
B_MPX_B_EN
B_BLK_SHD
B_MPX_A_EN
+5.9V
+5.0V
SDATA
SCLK
G_SUB
LD
+15.2V
G_MPX_A_EN
G_MPX_B_EN
H1_1
G_MPX_C_EN
H1_2
G_BLK_SHD
H2
TG_CLK74_PAHSE_2
+2.2V
MASTER_CLK148
TG_CLK37_PAHSE
+3.0V
TG_CLK74_PAHSE_1
TG_CLK74_2
SHP_EN
TG_CLK74_1
SHD_EN
TG_CLK37_2
TG_CLK37_1
SHP1_EN
R_MPX_C_EN
R_MPX_B_EN
TG-DR
R_MPX_A_EN
H_CLAMP
VH1_TG
VH2_TG
-3.5V
HHG_TG
SHUTTER (+)
SHUTTER (-)
RB_V1
G_V1
RB_V2
G_V2
RB_V3
G_V3
RB_V4
G_V4
SG
R_SUB
-8.5V
R_BLK_SHD
E2
E1
MASTER CLK
TG_CLK37_PAHSE
TG_CLK74_PAHSE_1
TG_CLK74_PAHSE_2
MASTER_CLK148
SEL L: A H: B
IC4 (4/4) TC7WZ04FK (TE85R)
IC4 (1/4) TC7WZ04FK (TE85R)
IC4 (2/4) TC7WZ04FK (TE85R)
IC4 (3/4) TC7WZ04FK (TE85R)
IC2 (3/3) TC74VCX74FT (EL)
IC3 (3/3) TC74VCX74FT (EL)
IC7 TC74VCX157FT (EL)
IC2 (1/3) TC74VCX74FT (EL)
IC2 (2/3) TC74VCX74FT (EL)
IC3 (1/3) TC74VCX74FT (EL)
IC3 (2/3) TC74VCX74FT (EL)
CLK37_1_B
CLK37_1_G
CLK37_1_R
CLK37_2_B
CLK37_2_G
CLK37_2_R
CLK74_1
CLK74_2_B
CLK74_2_G
CLK74_2_R
CLK74_2
IC11 TC74VCX157FT (EL)
IC12 TC74VCX157FT (EL)
IC13 TC74VCX157FT (EL)
IC1 LT1964ES5-BYP#TR
IC6 LTC1844ES5-BYP NW
IC10 TC74HCT4053AFT (EL)
IC21 (2/2) TC7SZ32FU (TE85R)
IC21 (1/2) TC7SZ32FU (TE85R)
DR-PA
FOR TEST
IC8 SN74LVC541APWR
IC9 SN74LVC541APWR
Q1 FDC6561AN
Q3 FDC6561AN
Q5 FDC6561AN
Q7 FDC6561AN
Q2 FDC6506P
Q4 FDC6506P
Q6 FDC6506P
Q8 FDC6506P
Q9 FDC6561AN
Q10 FDC6506P
D1 MA6S127-(TX)
D2 MA6S127-(TX)
D3 MA6S127-(TX)
D4 MA6S127-(TX)
D5 MA6S127-(TX)
D6 MA6S127-(TX)
RB1 100k
RB2 100k
RB3 100k
RB4 100k
6ms

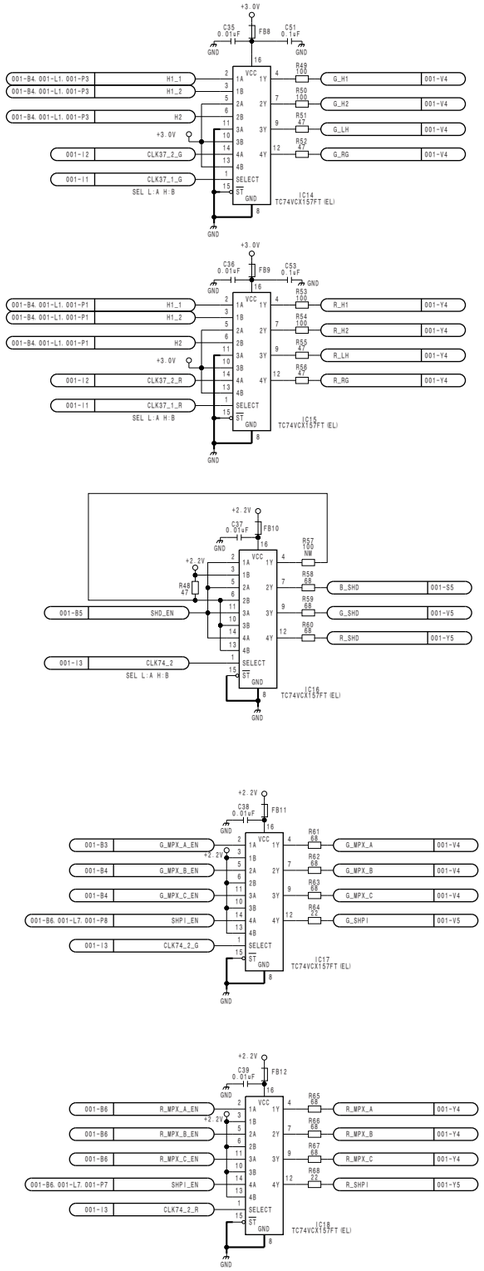


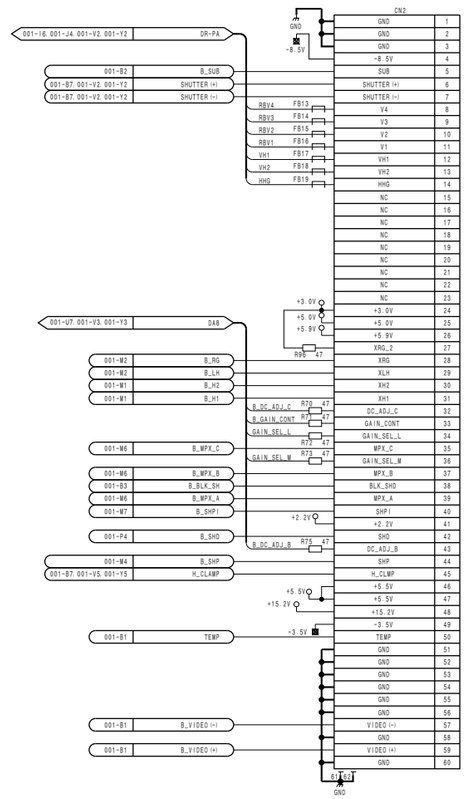

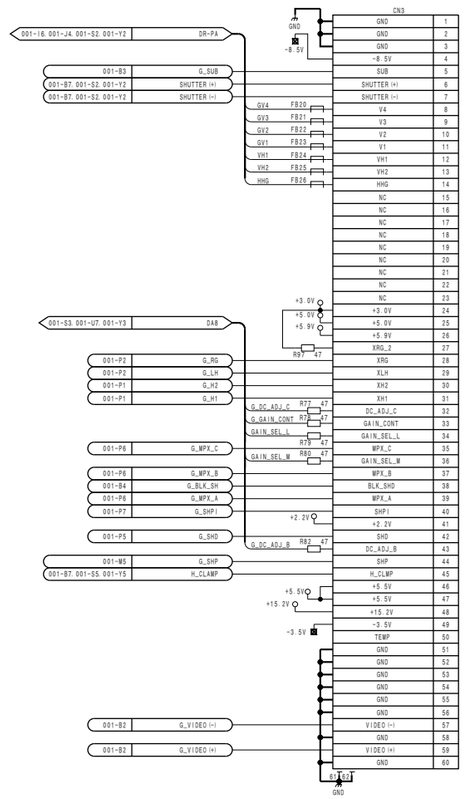

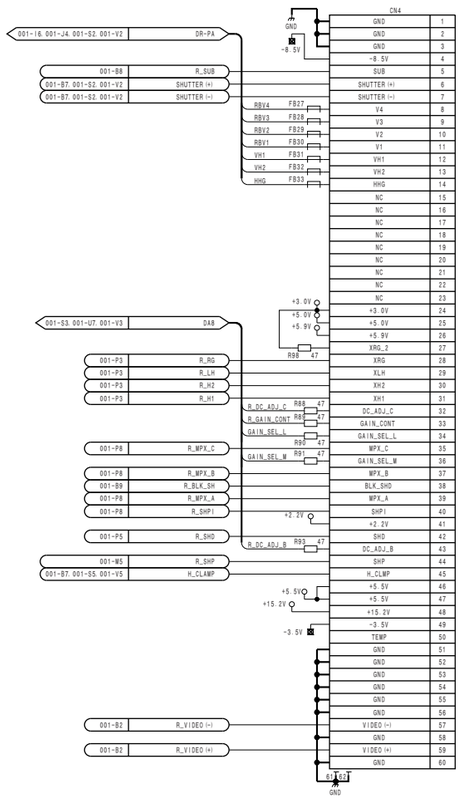


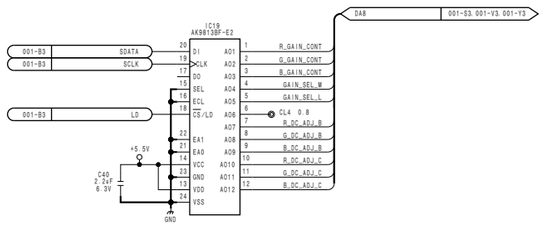





DR-617
BOARD NO. 1-876-841-11
VCX-434_DR-617_011_1


DVP-45 (1/25)
SUFFIX: -12

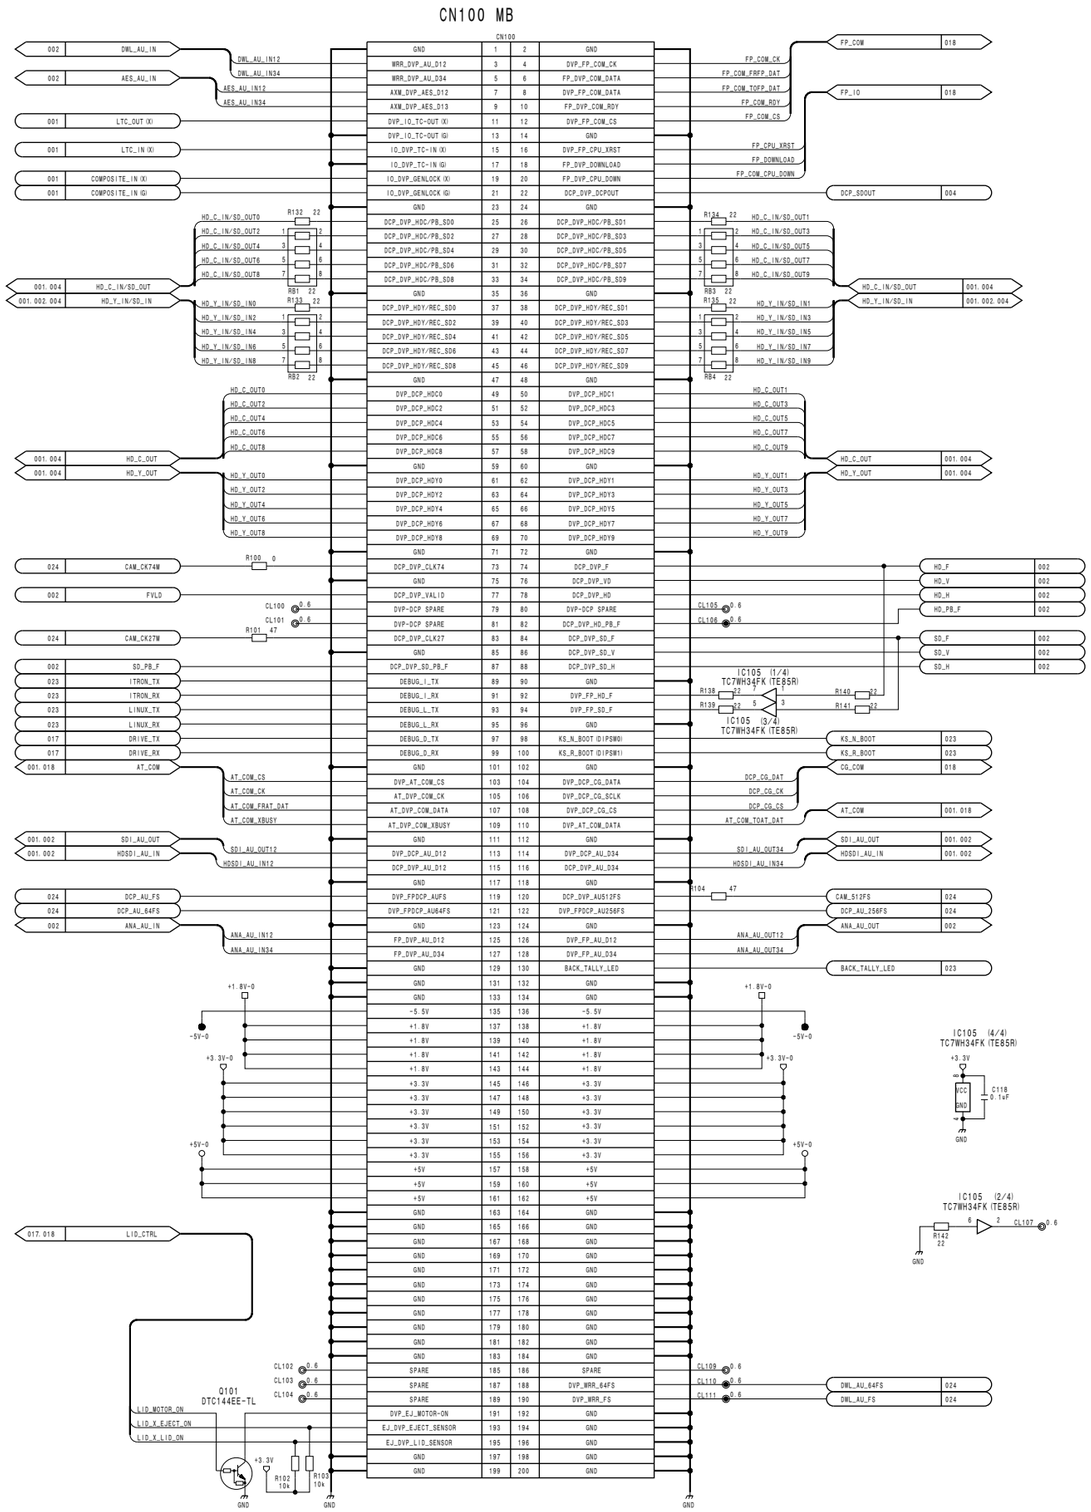

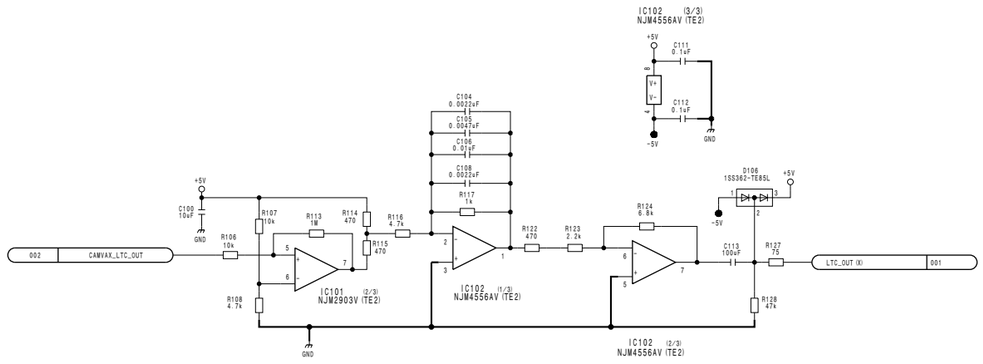

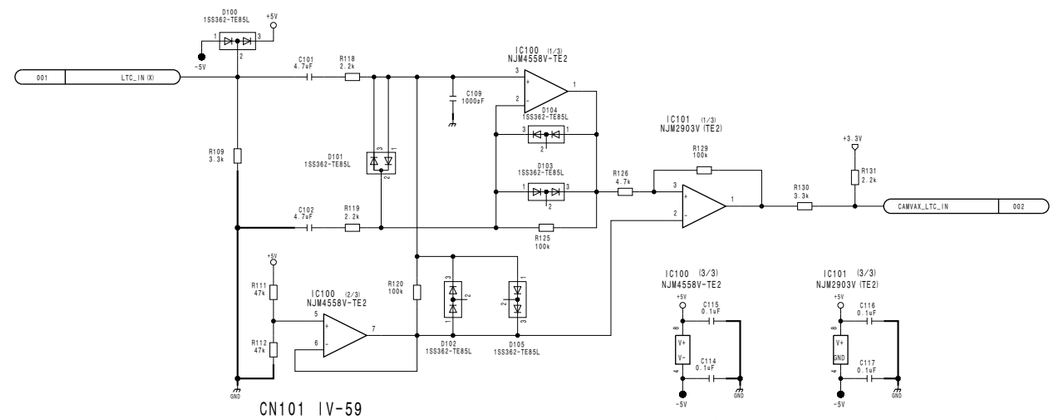


CN101 IV-59

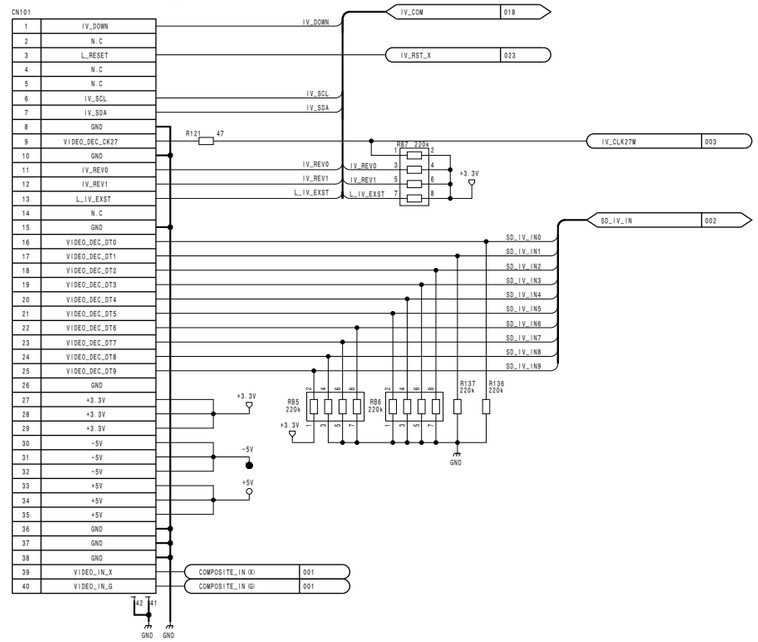


DVP-45 (1/25)
BOARD NO. 1-876-847-12
PDW-700_DVP-45_012_1

3-44

DVP-45 (2/25)
SUFFIX: -12

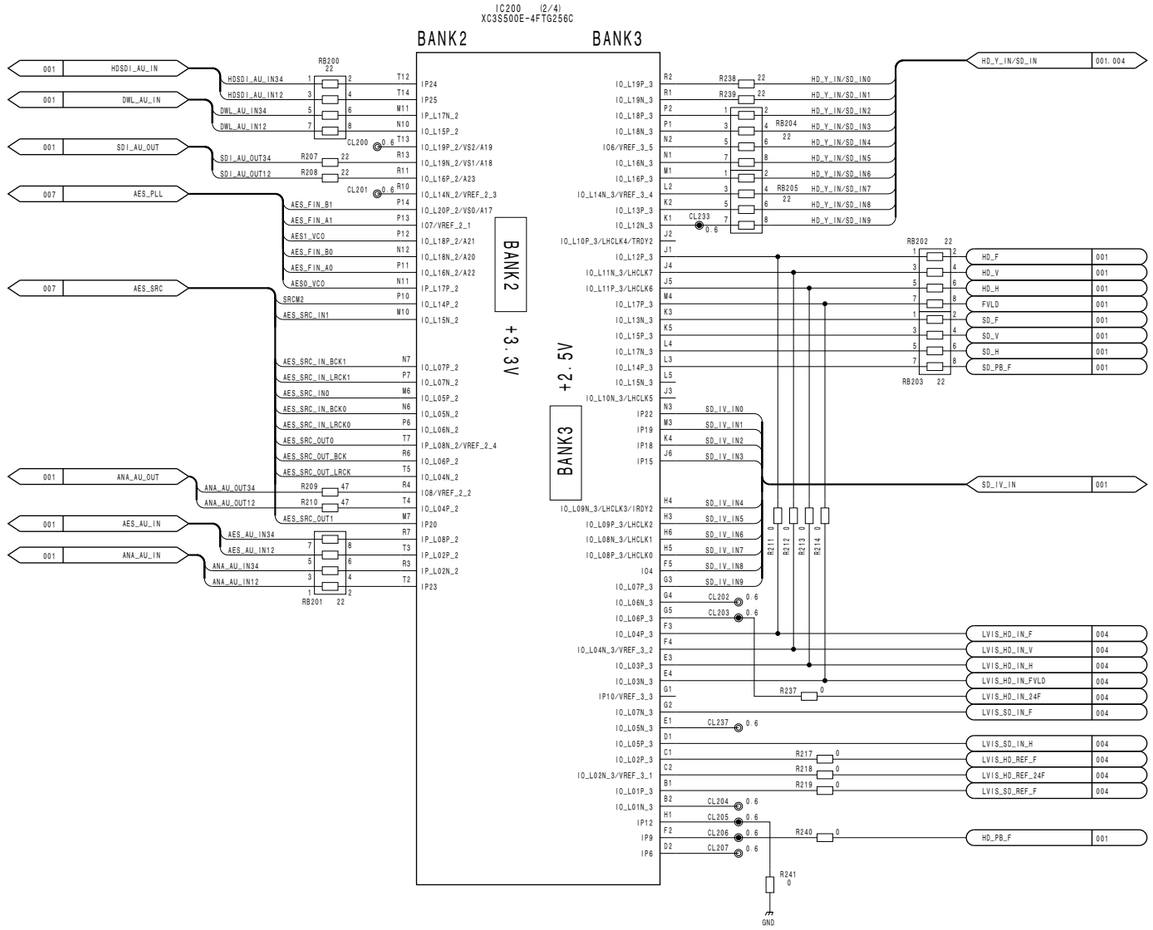


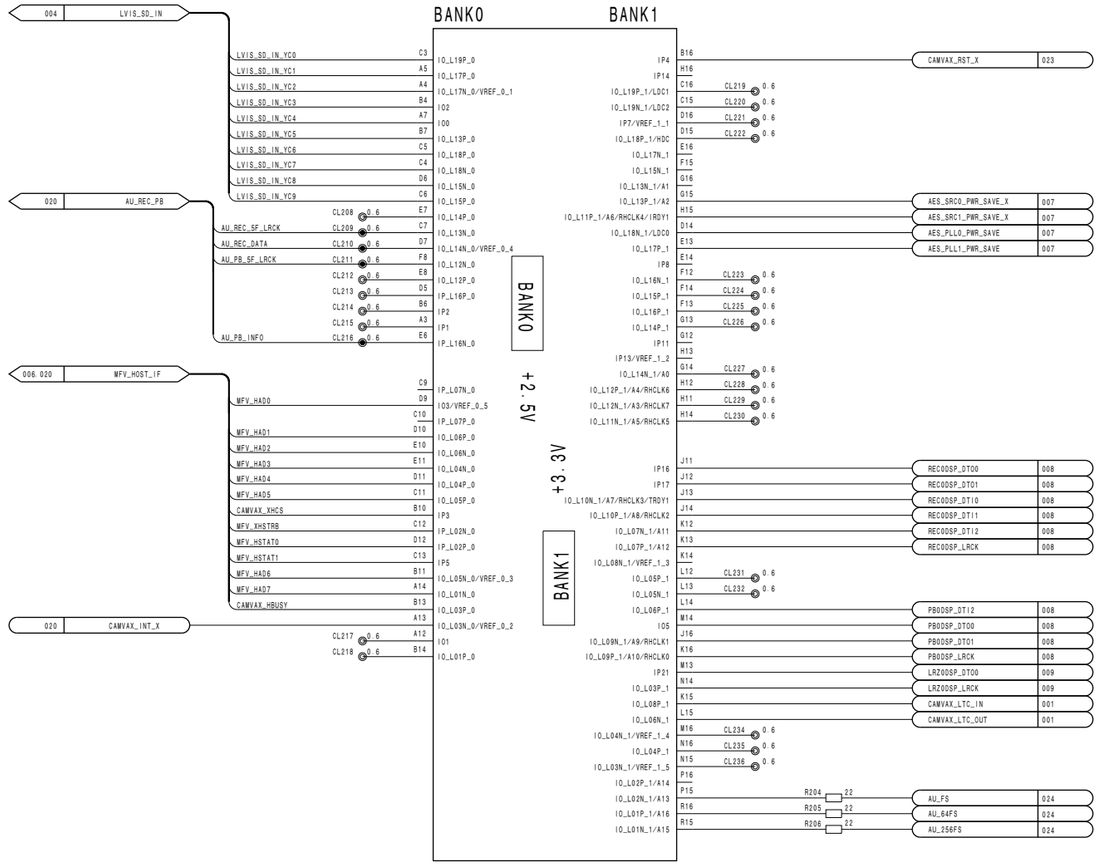


3-45

DVP-45 (2/25)
BOARD NO. 1-876-847-12
PDW-700_DVP-45_012_2

DVP-45 (3/25)
SUFFIX: -12

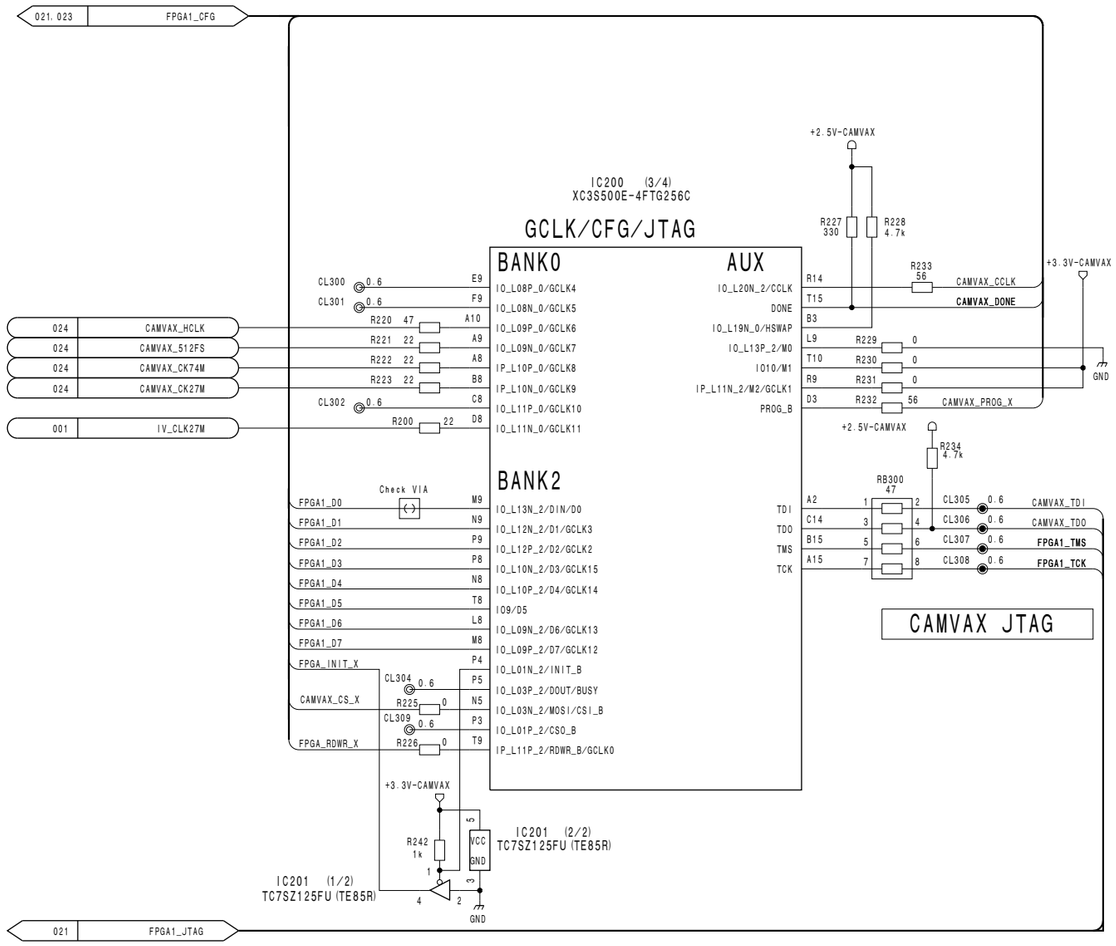

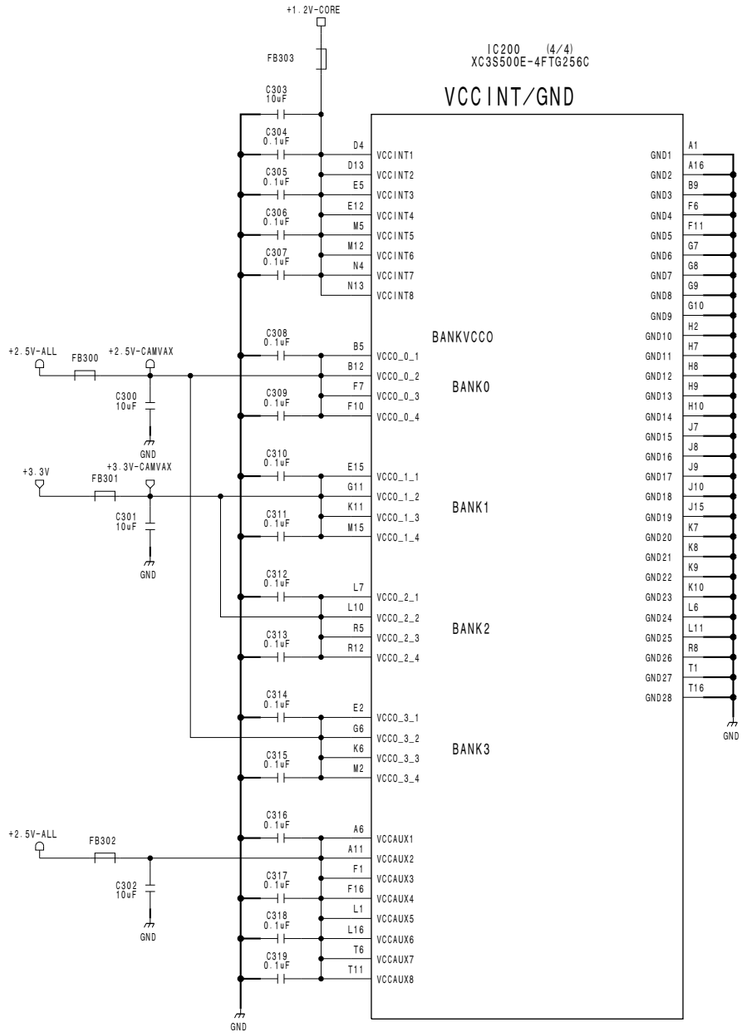



3-46

DVP-45 (3/25)
BOARD NO. 1-876-847-12
PDW-700_DVP-45_012_3

PDW-F800/V2 (J,E)

DVP-45 (4/25)
SUFFIX: -12

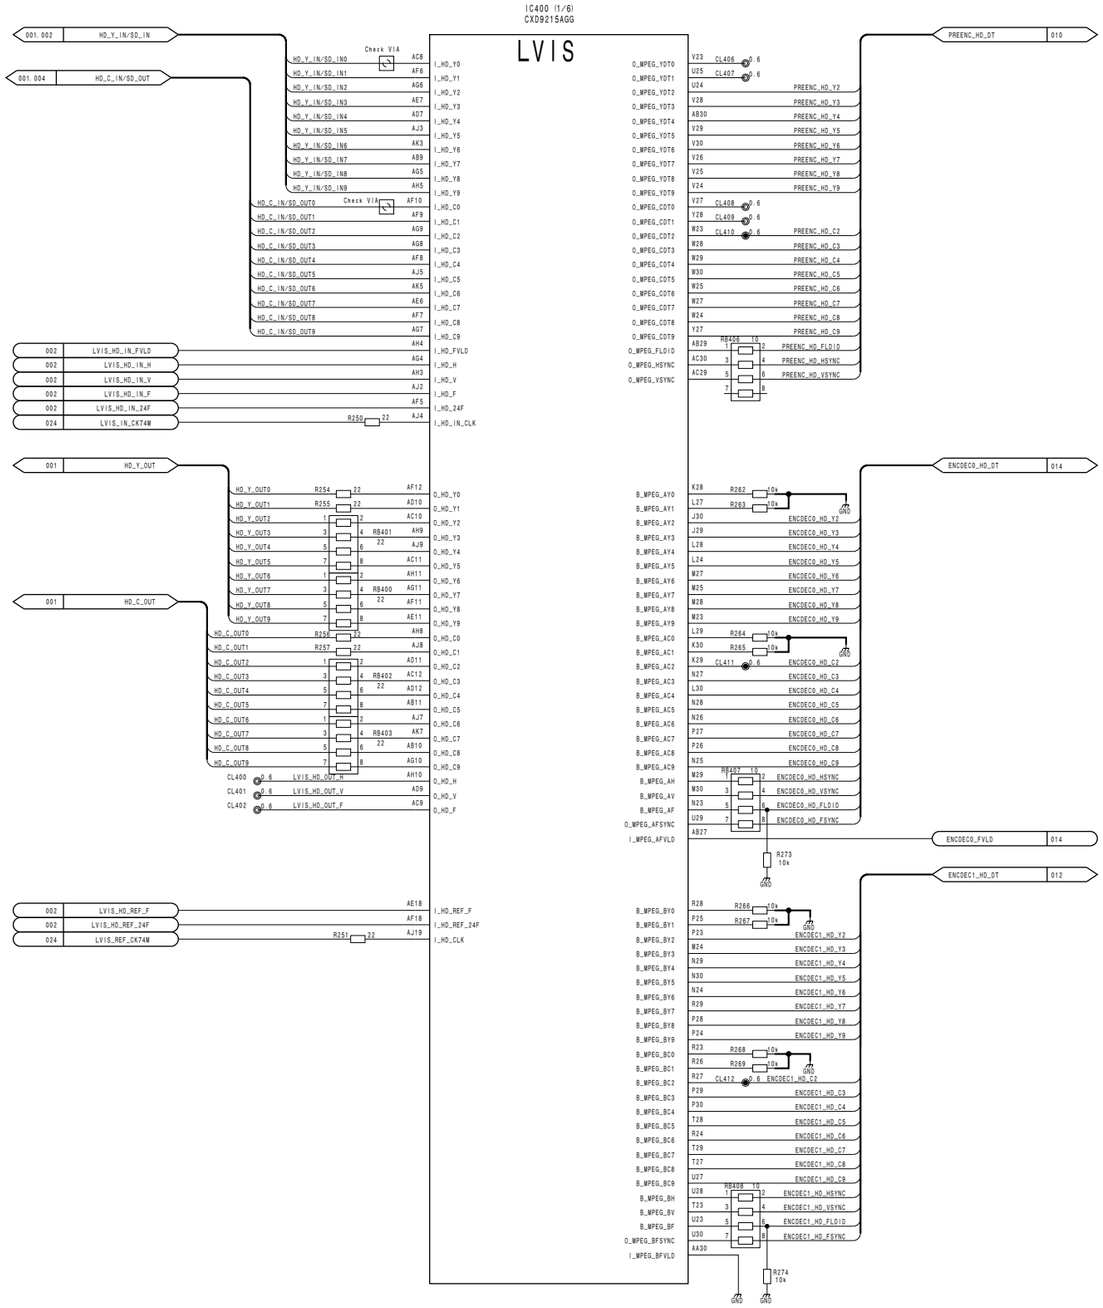

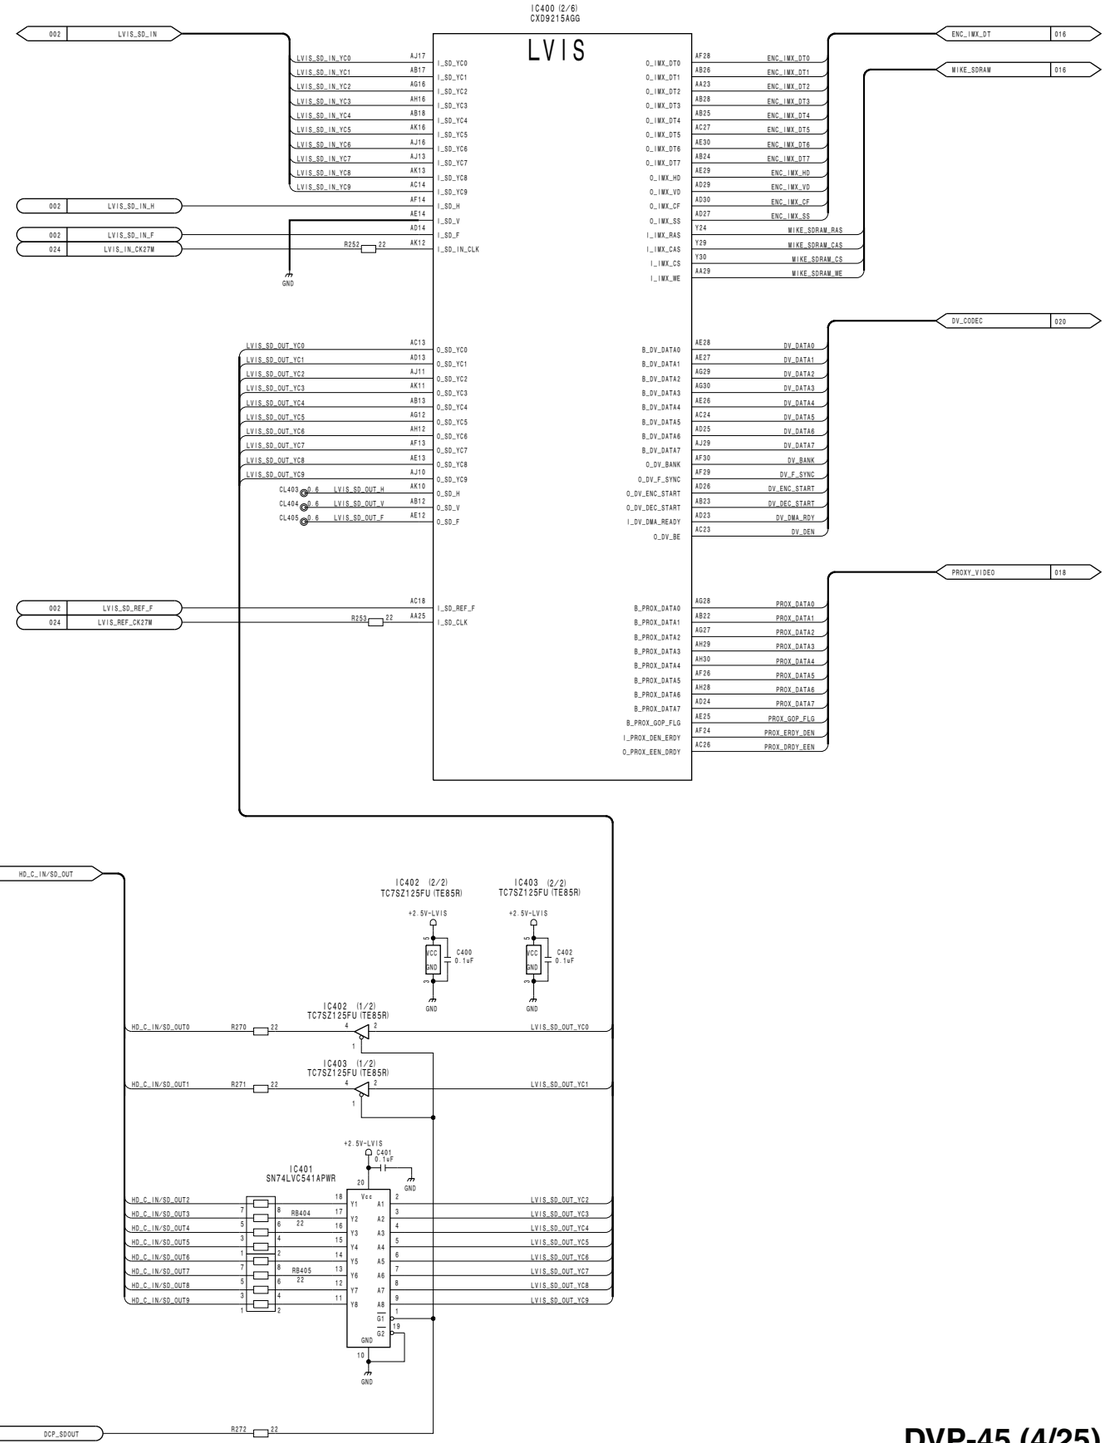


DVP-45 (4/25)
BOARD NO. 1-876-847-12
PDW-700_DVP-45_012_4


DVP-45 (5/25)
SUFFIX: -12


3-48

DVP-45 (5/25)
BOARD NO. 1-876-847-12
PDW-700_DVP-45_012_5

PDW-F800/V2 (J,E)

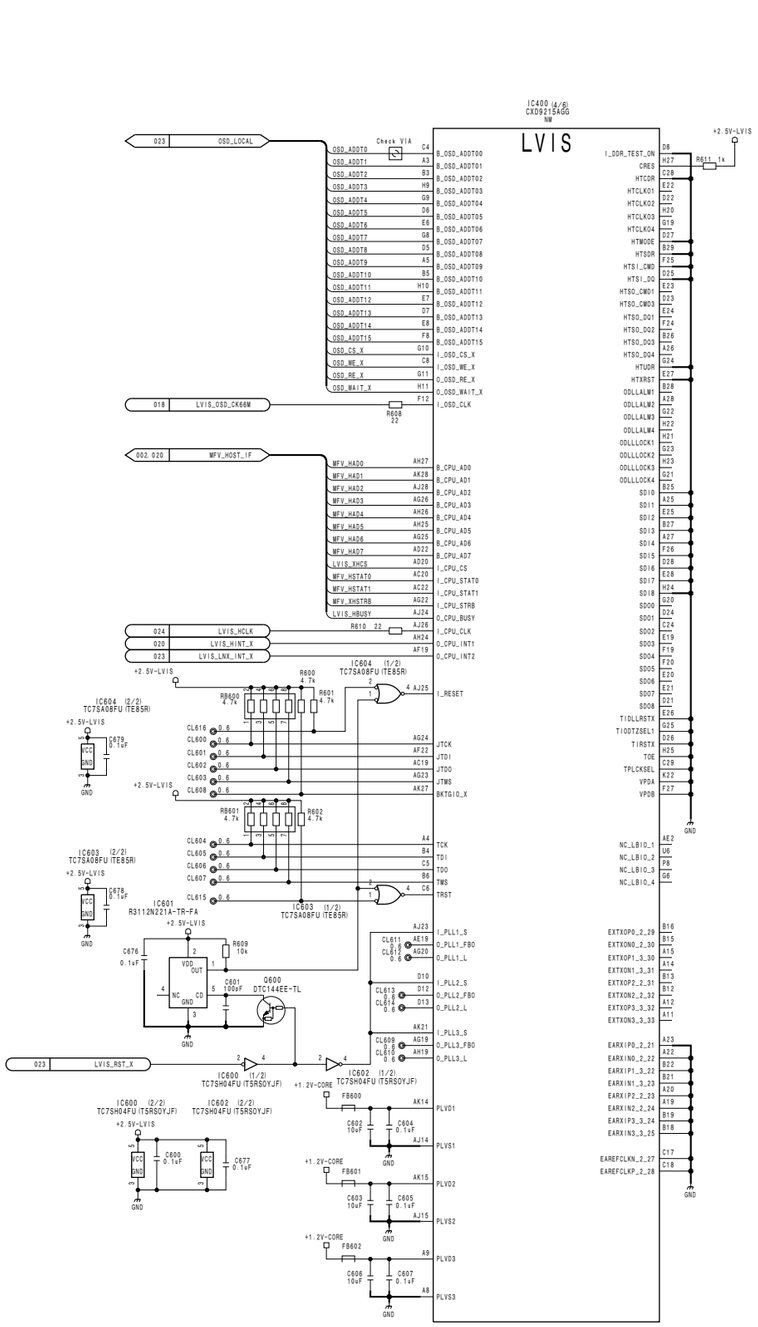

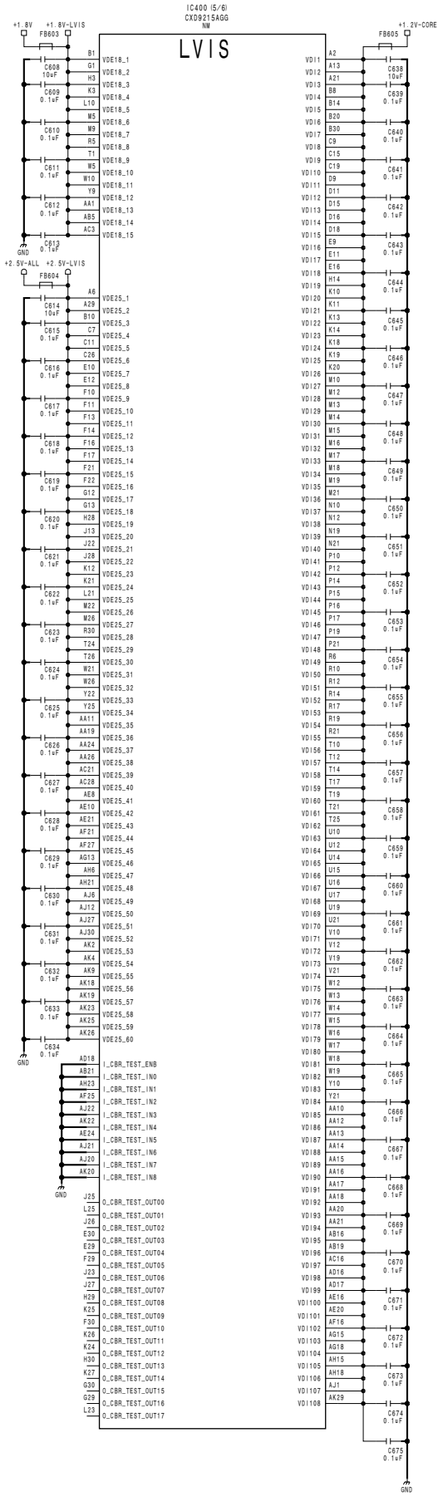

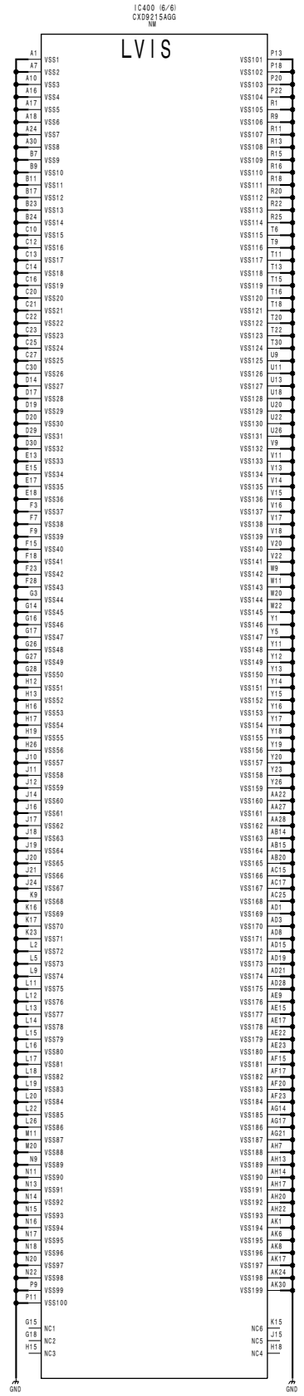


DVP-45 (6/25)


BOARD NO. 1-876-847-12

PDW-700_DVP-45_012_6

DVP-45 (7/25)
SUFFIX: -12

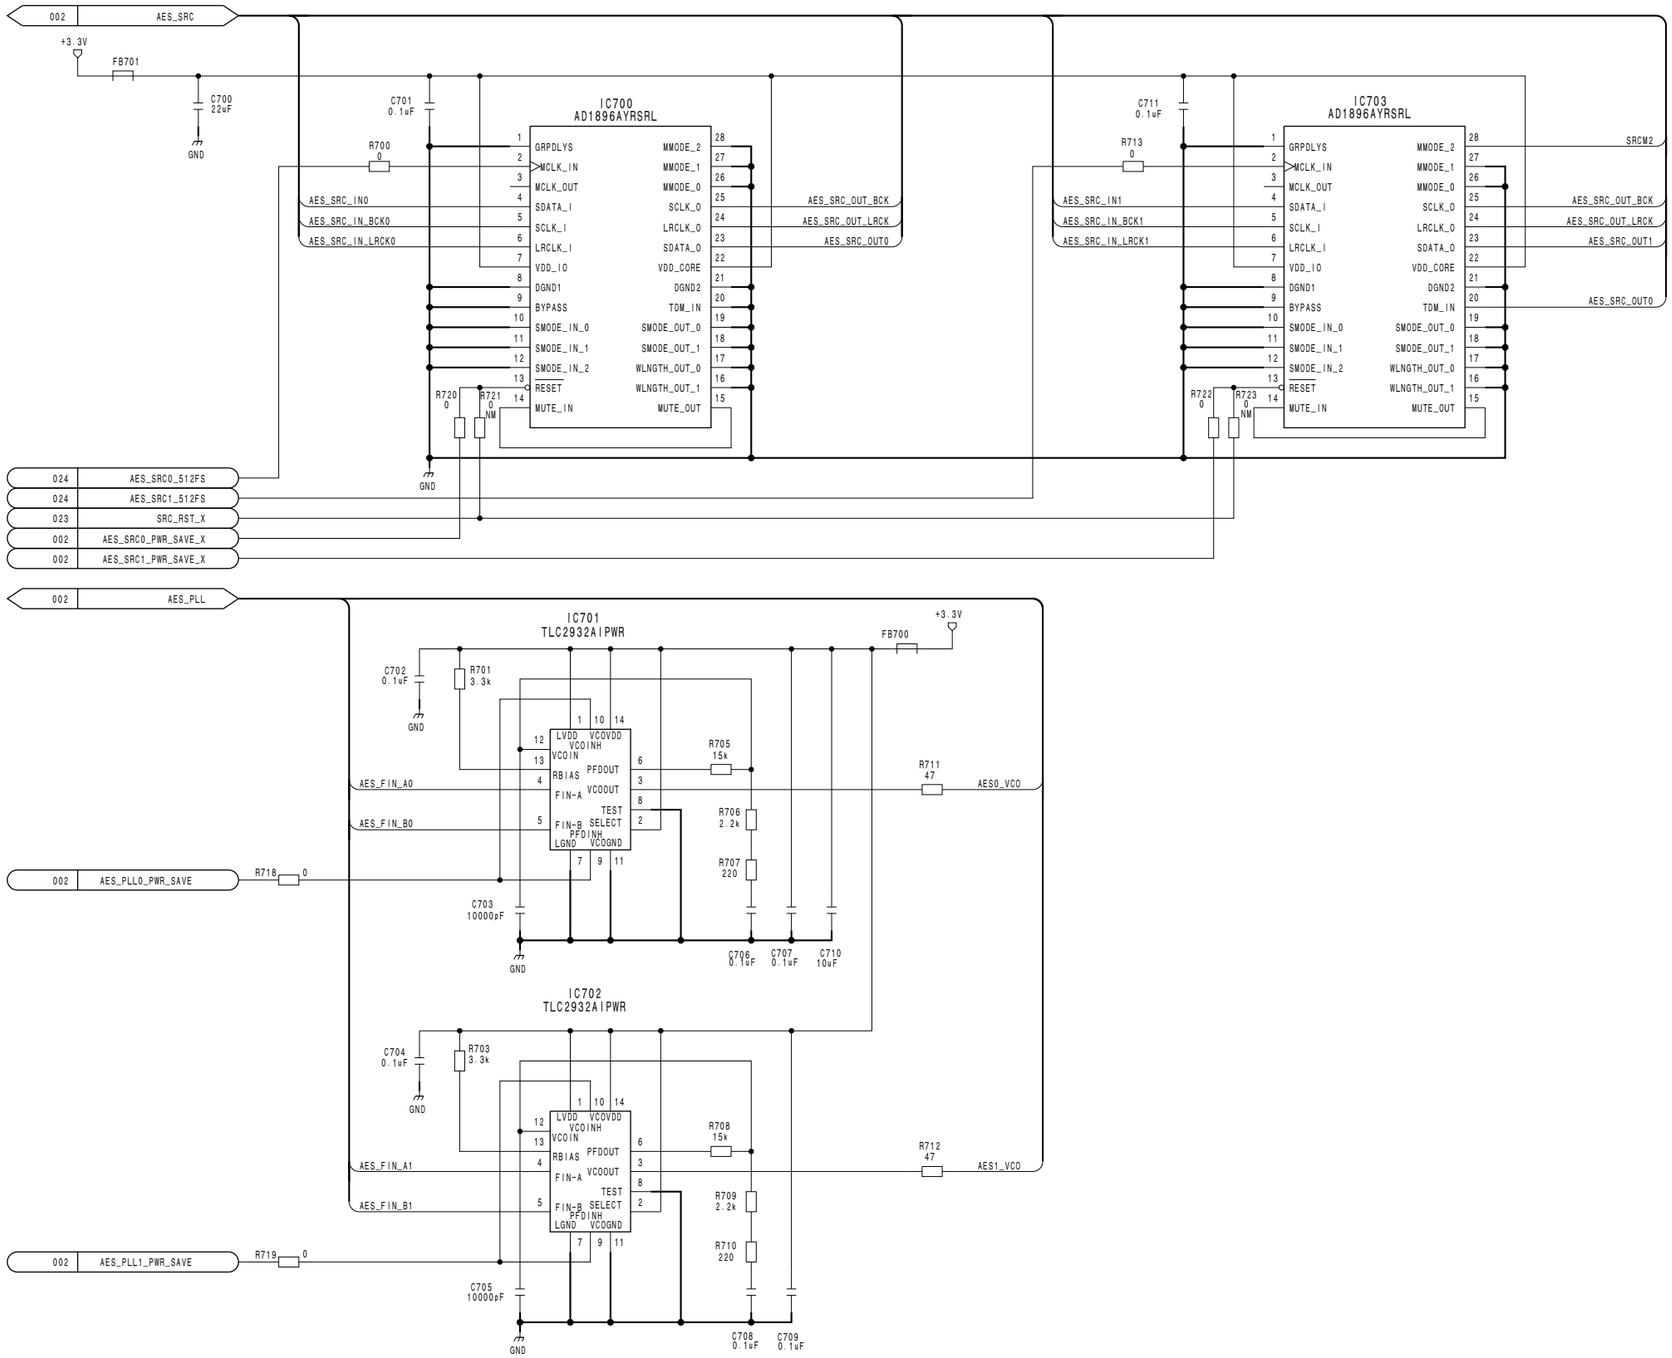


DVP-45 (8/25)
SUFFIX: -12

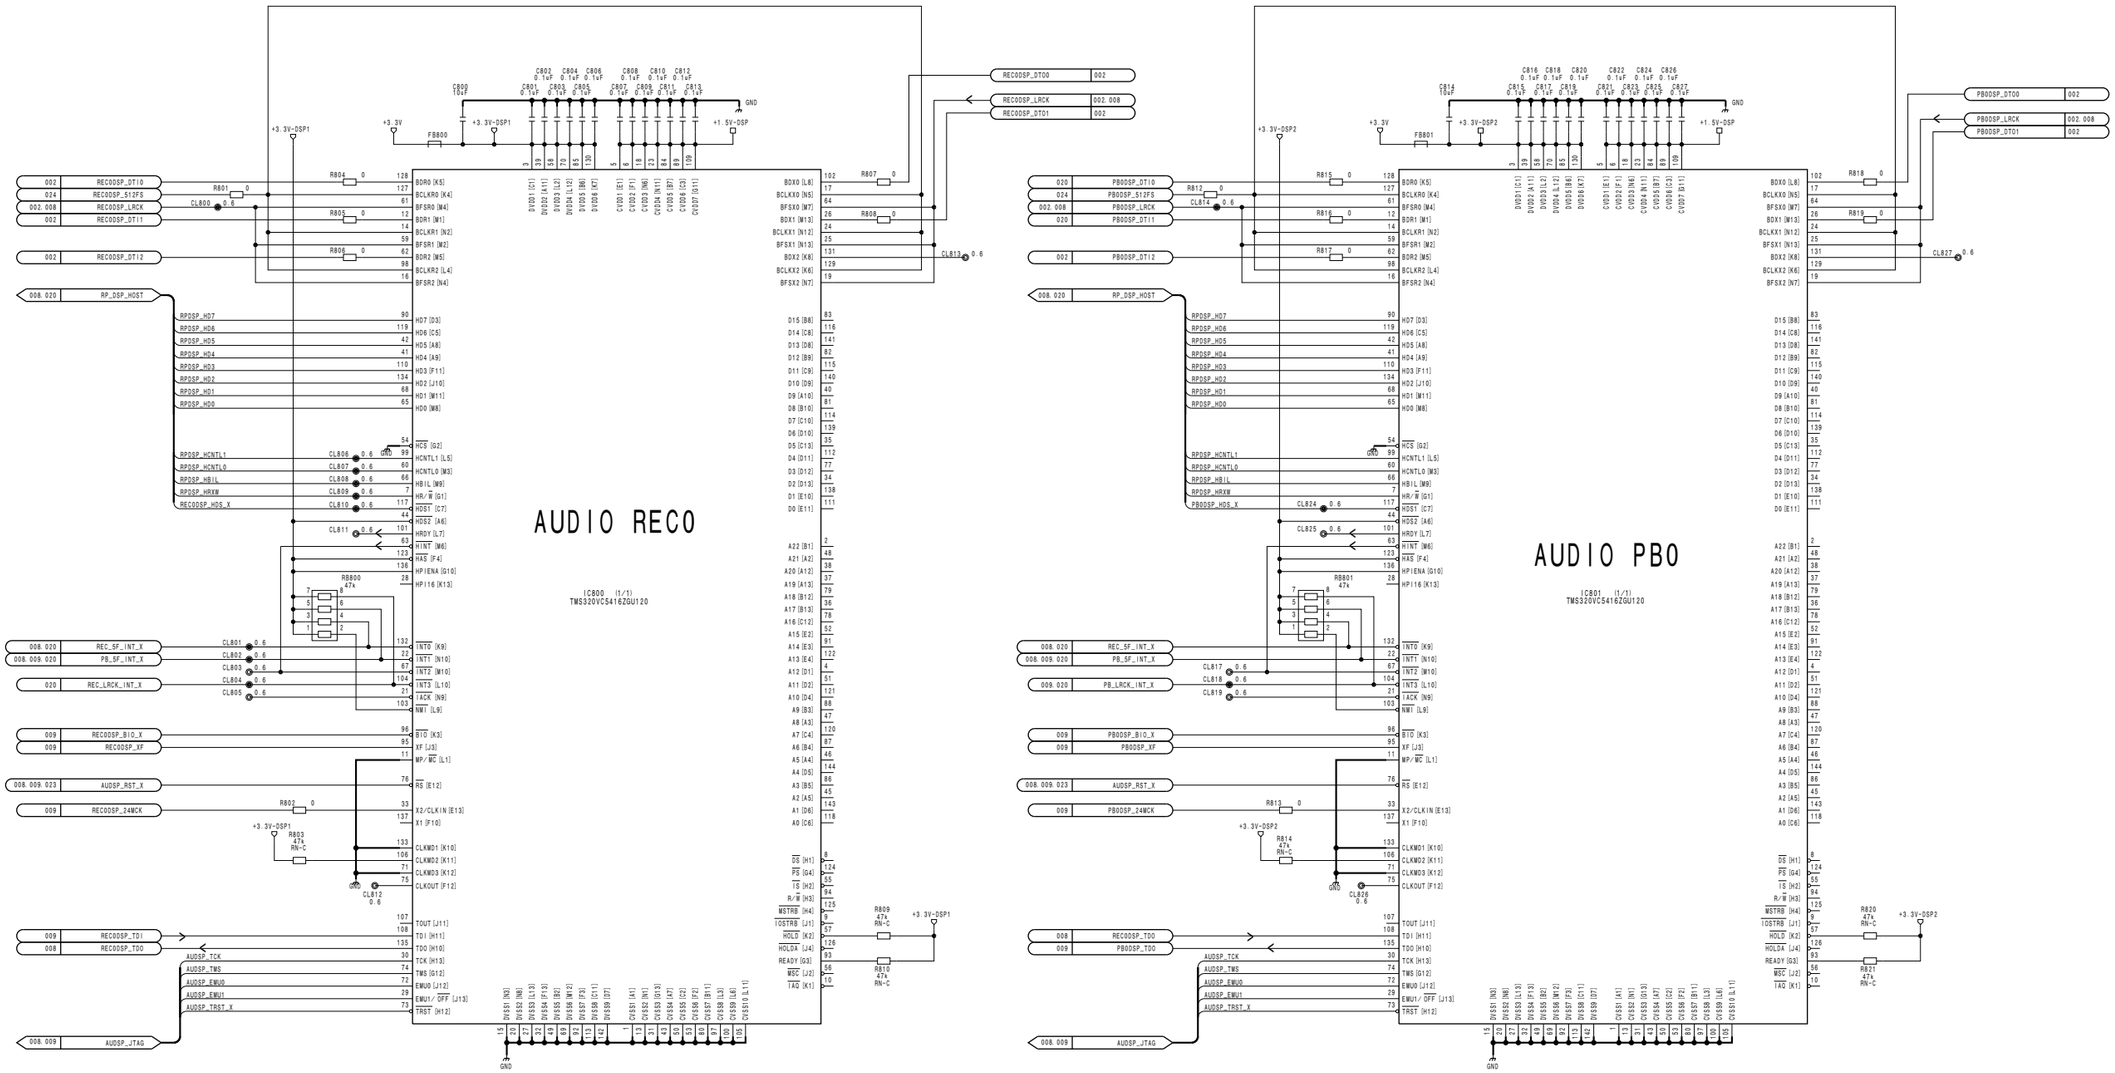

DVP-45 (8/25)
BOARD NO. 1-876-847-12
PDW-700_DVP-45_012_8

DVP-45 (9/25)
SUFFIX: -12

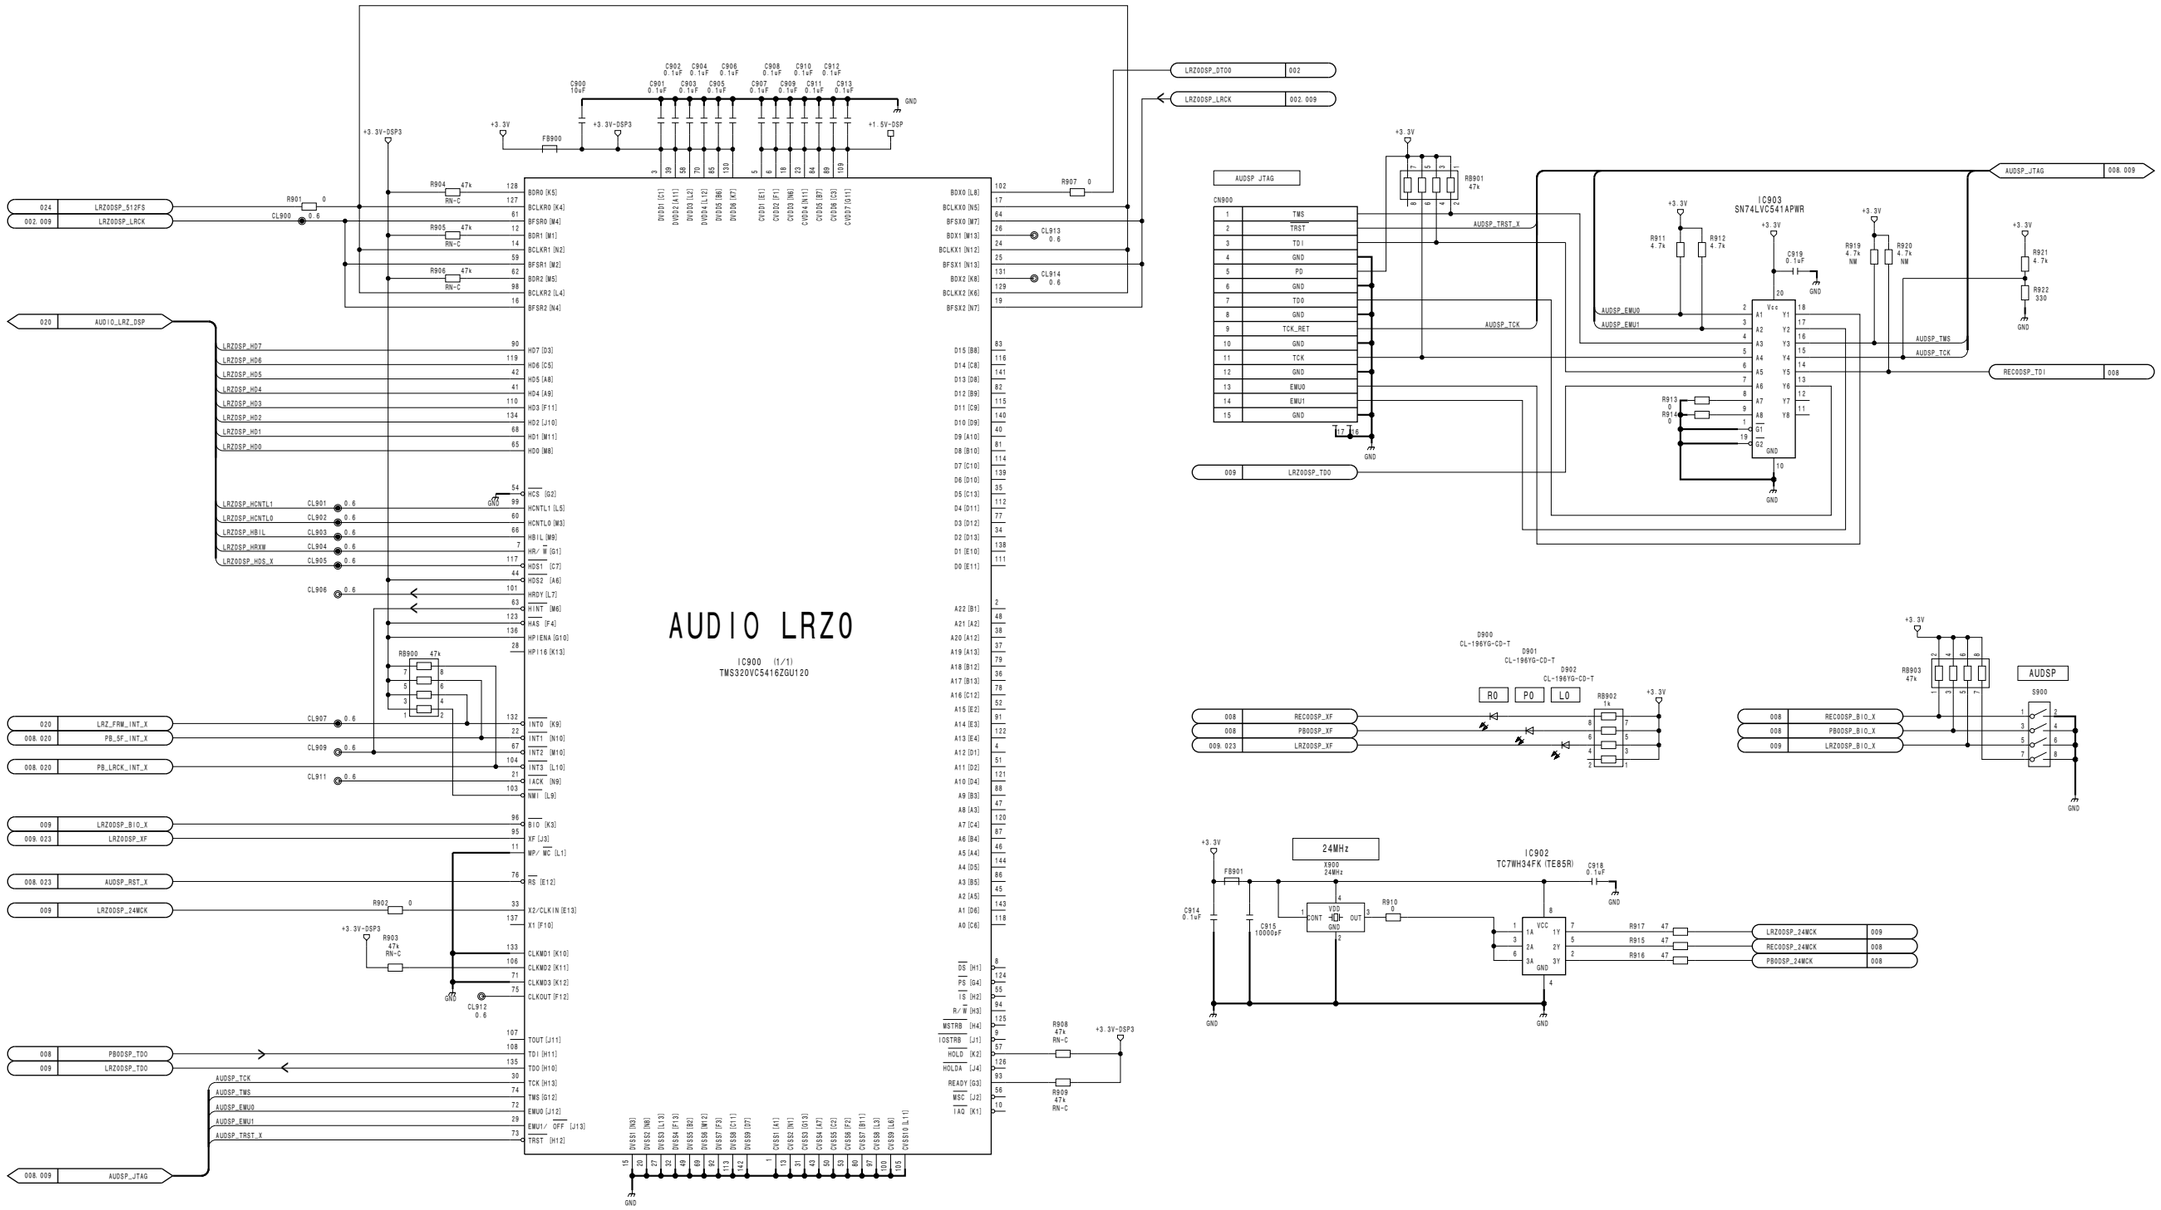


3-52

DVP-45 (9/25)
BOARD NO. 1-876-847-12
PDW-700_DVP-45_012_9

PDW-F800/V2 (J,E)


DVP-45 (10/25)
SUFFIX: -12

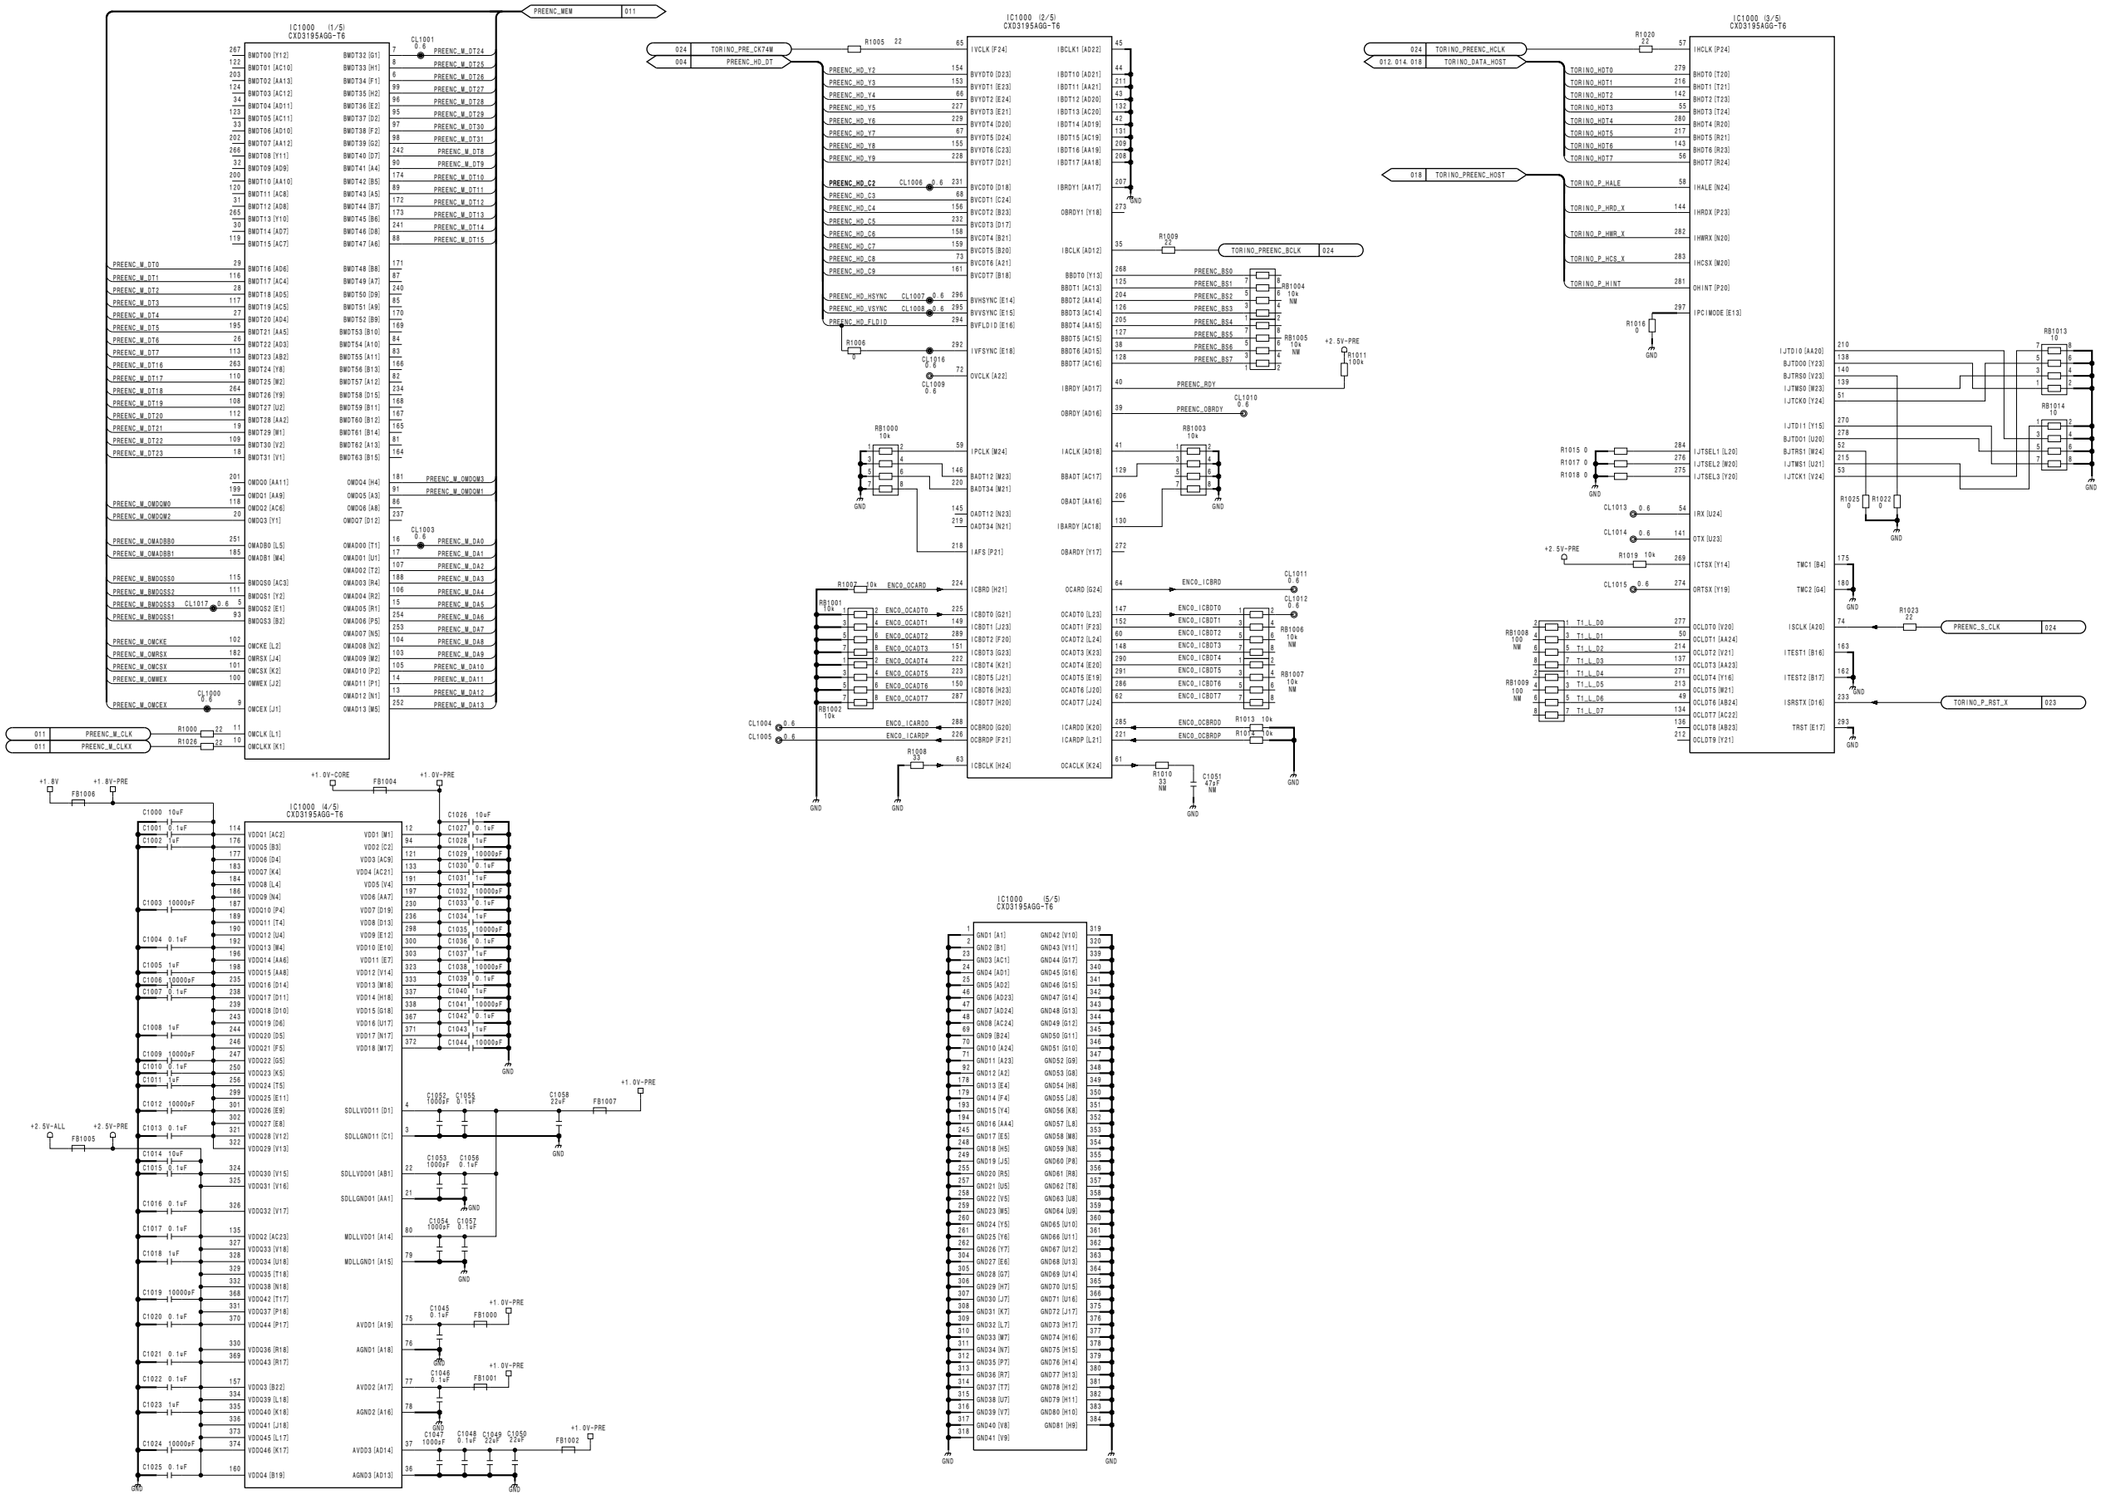

DVP-45 (10/25)
BOARD NO. 1-876-847-12
PDW-700_DVP-45_012_10

DVP-45 (11/25)
SUFFIX: -12

Mobile DDR SDRAM

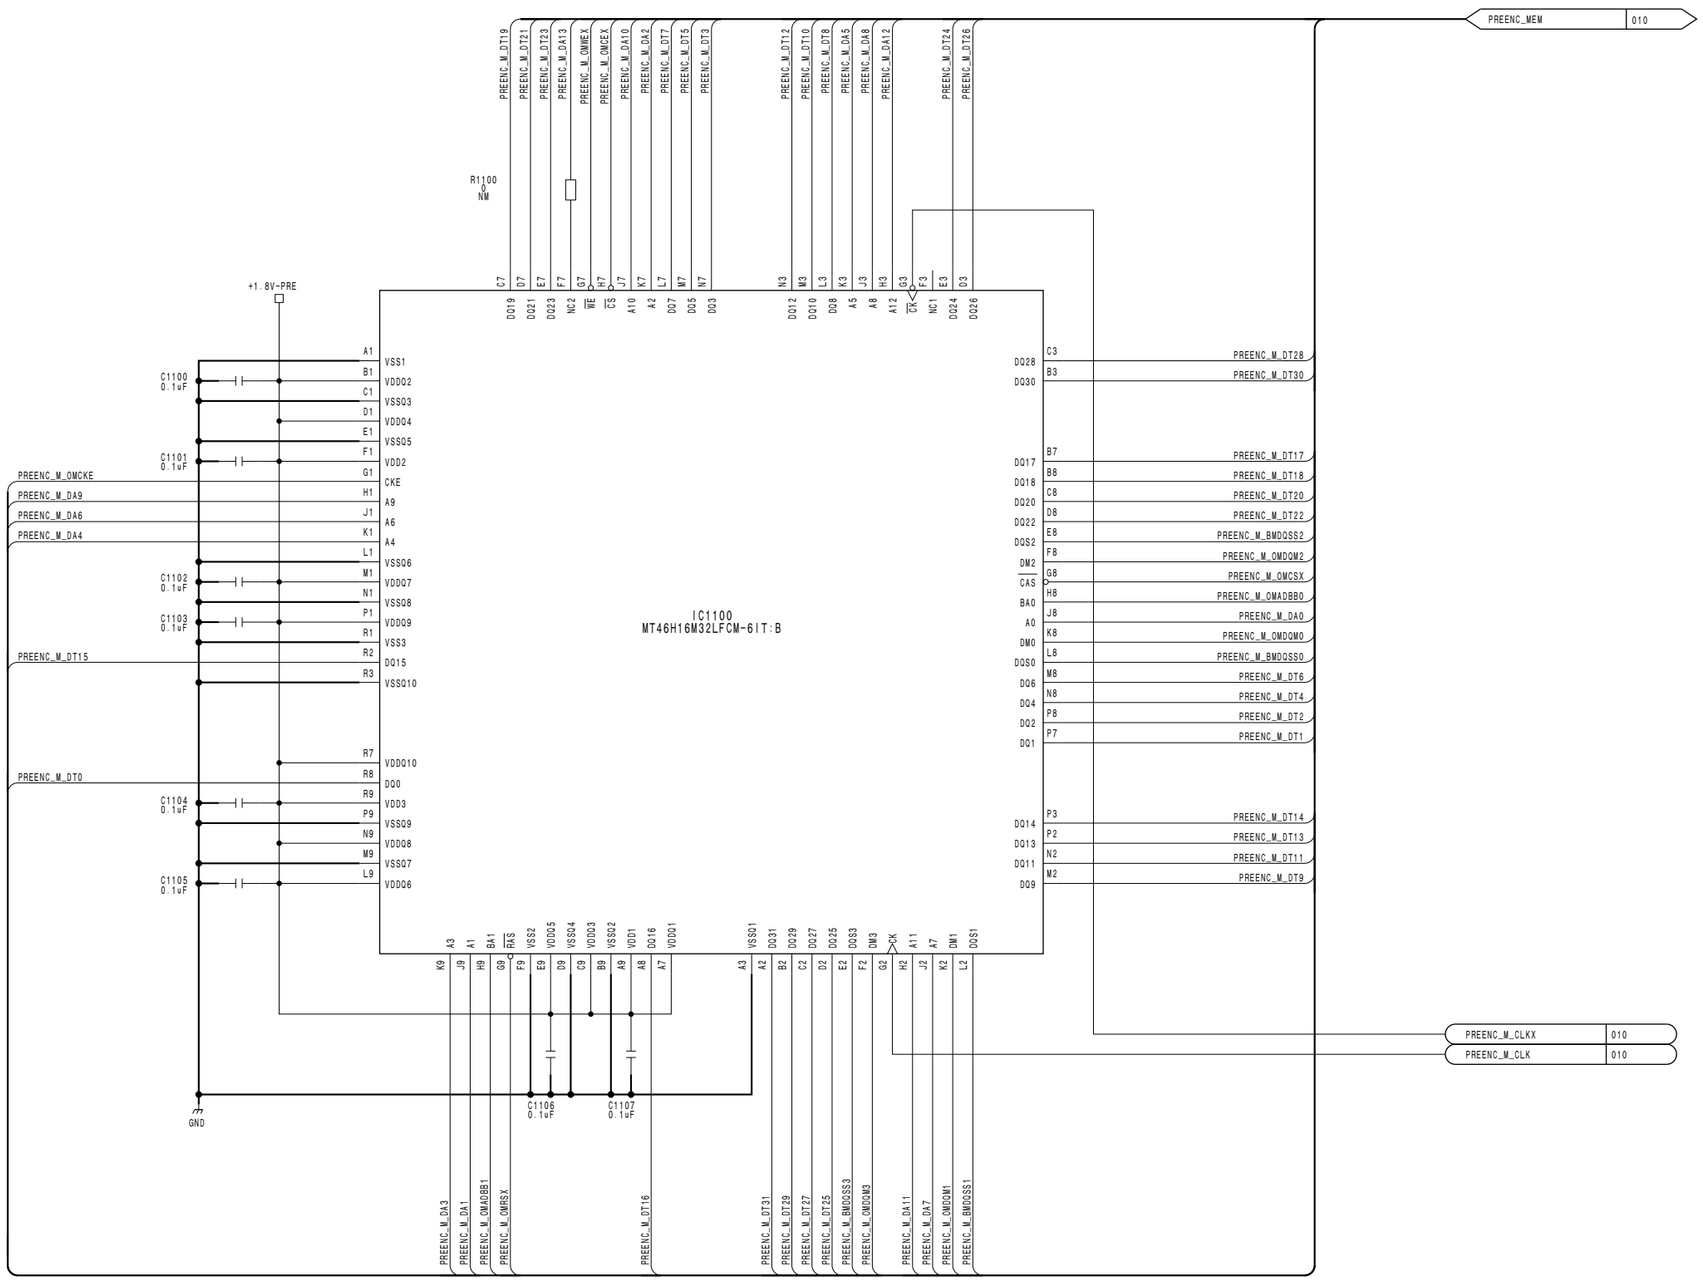


3-54

DVP-45 (11/25)
BOARD NO. 1-876-847-12
PDW-700_DVP-45_012_11

PDW-F800/V2 (J,E)

DVP-45 (12/25)
SUFFIX: -12

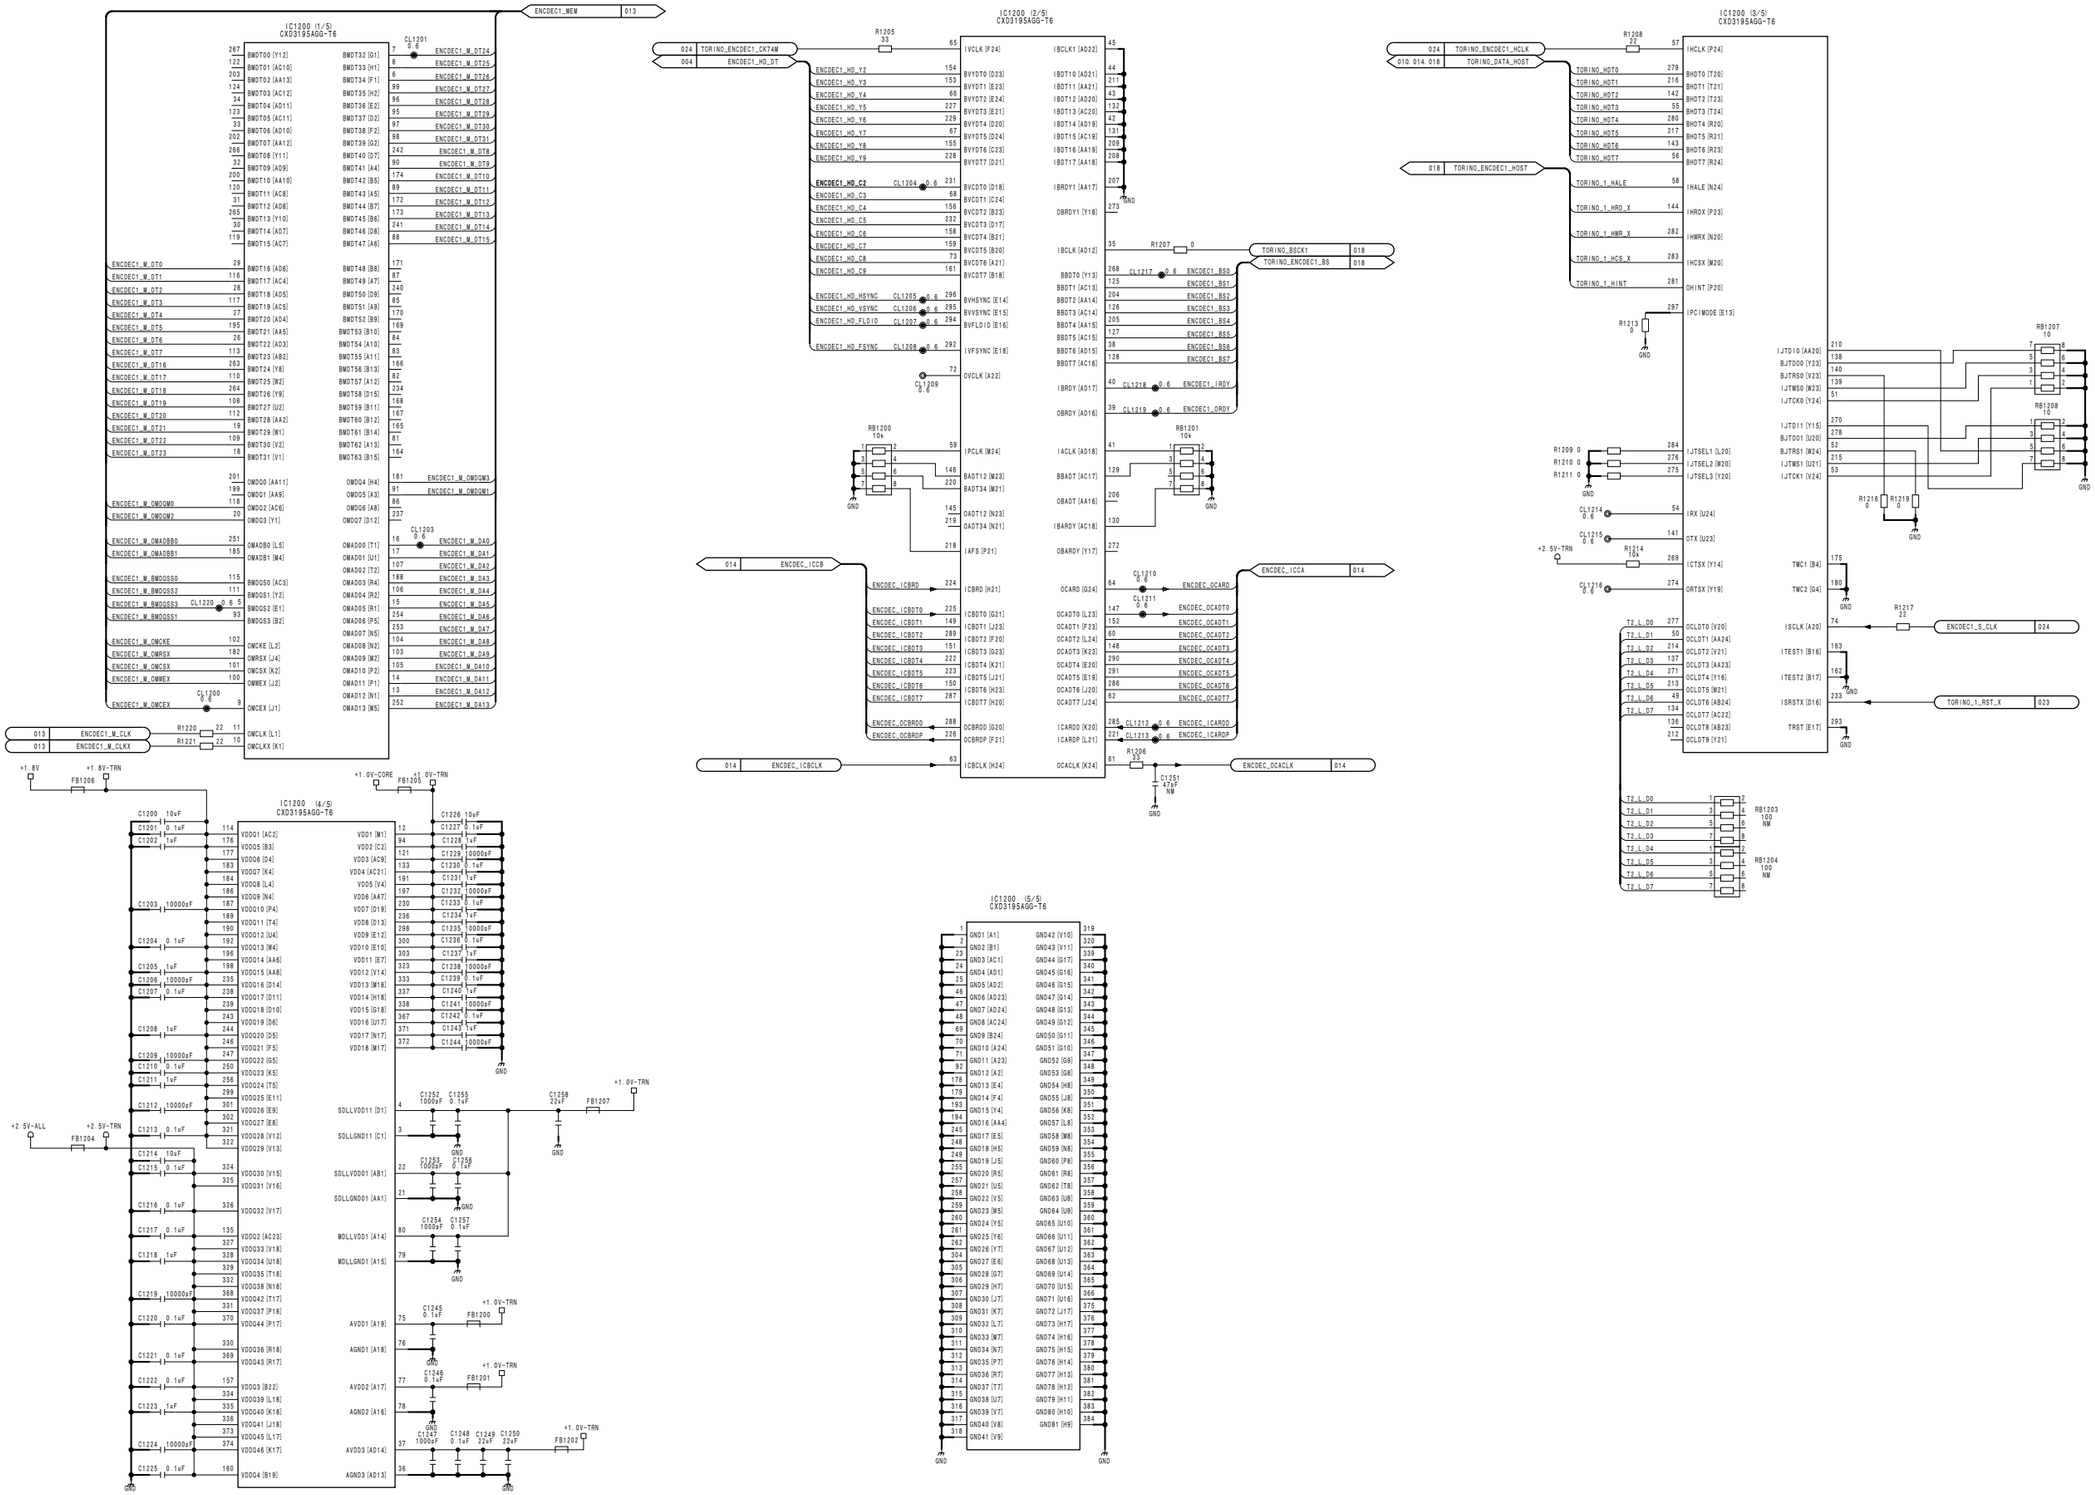

PDW-F800/V2 (J,E)

3-55

3-55


DVP-45 (12/25)
BOARD NO. 1-876-847-12
PDW-700_DVP-45_012_12

A B C D E F G H

1 2 3 4 5

DVP-45 (13/25)
SUFFIX: -12

Mobile DDR SDRAM

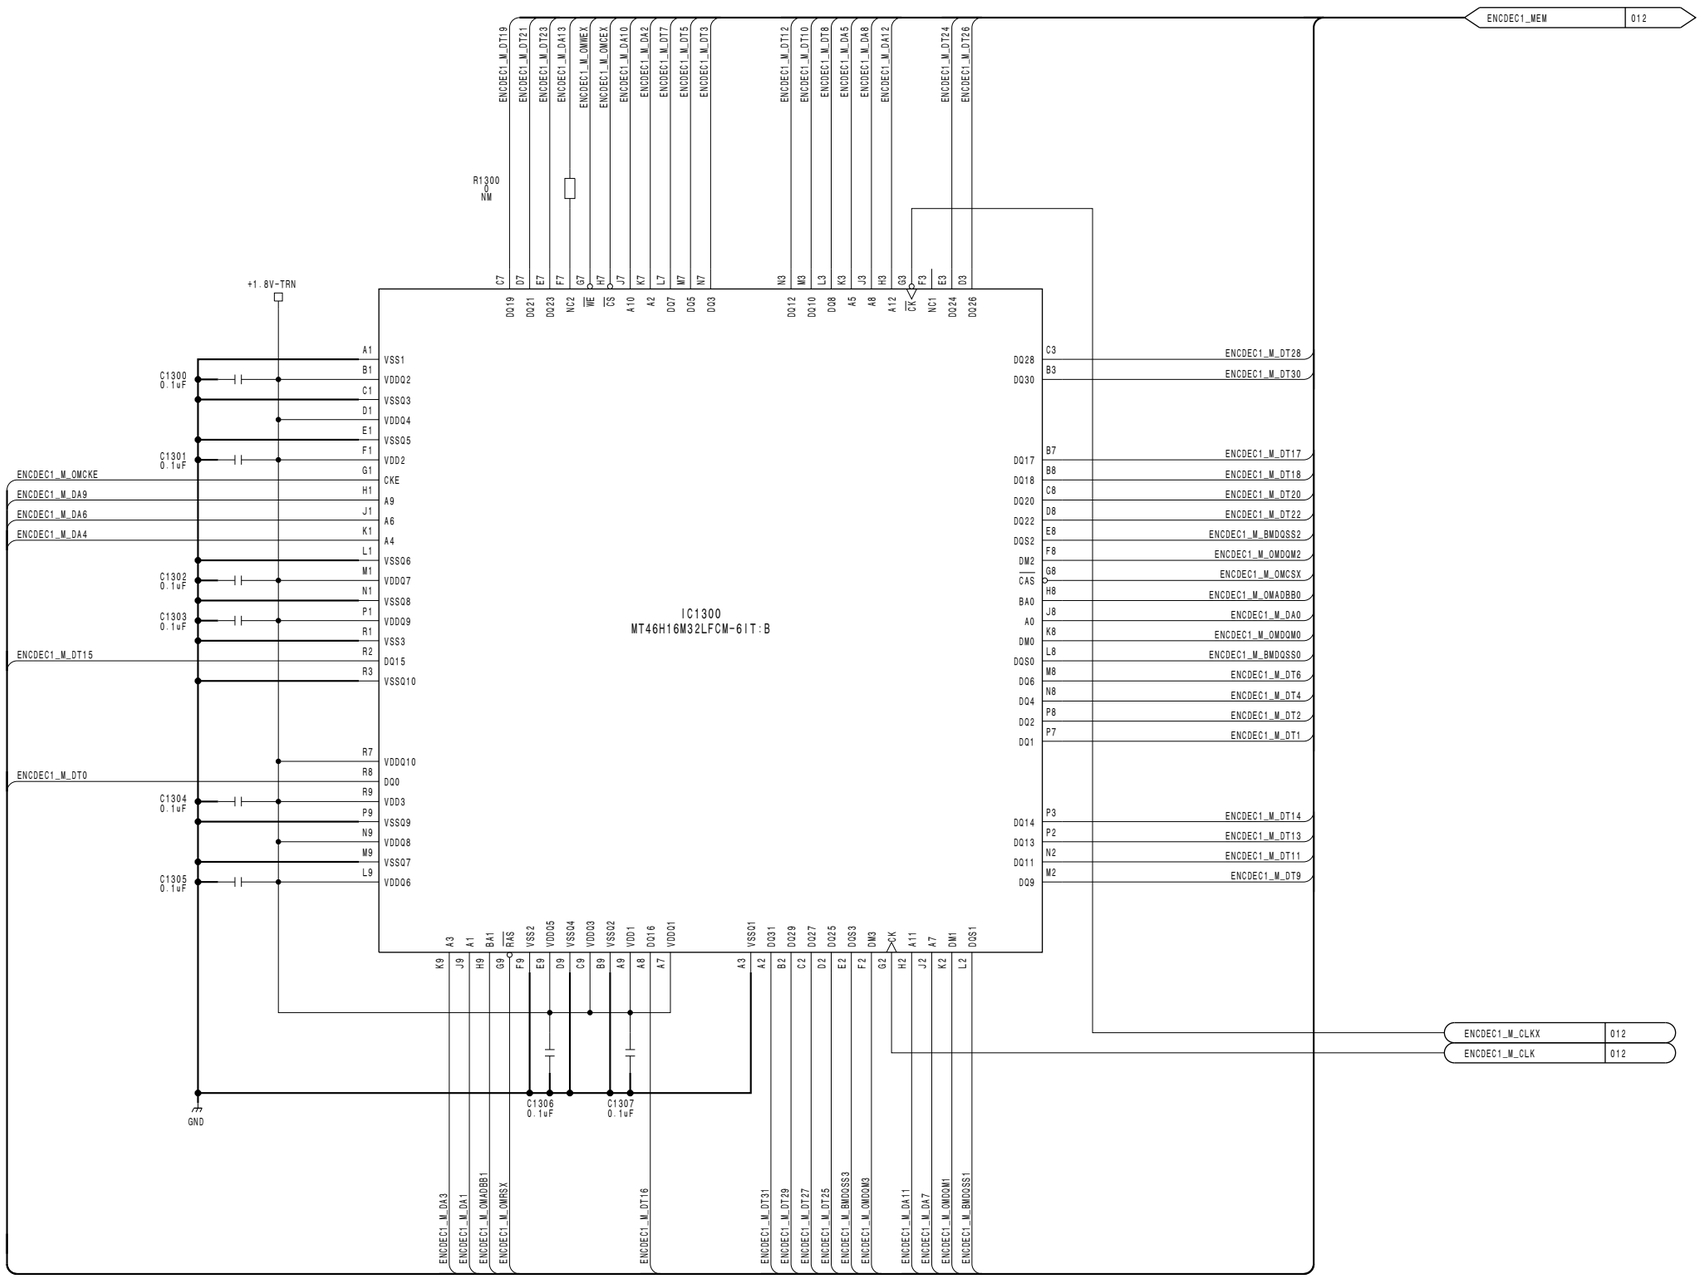


DVP-45 (13/25)
BOARD NO. 1-876-847-12
PDW-700_DVP-45_012_13

3-56

PDW-F800/V2 (J,E)


DVP-45 (14/25)
SUFFIX: -12

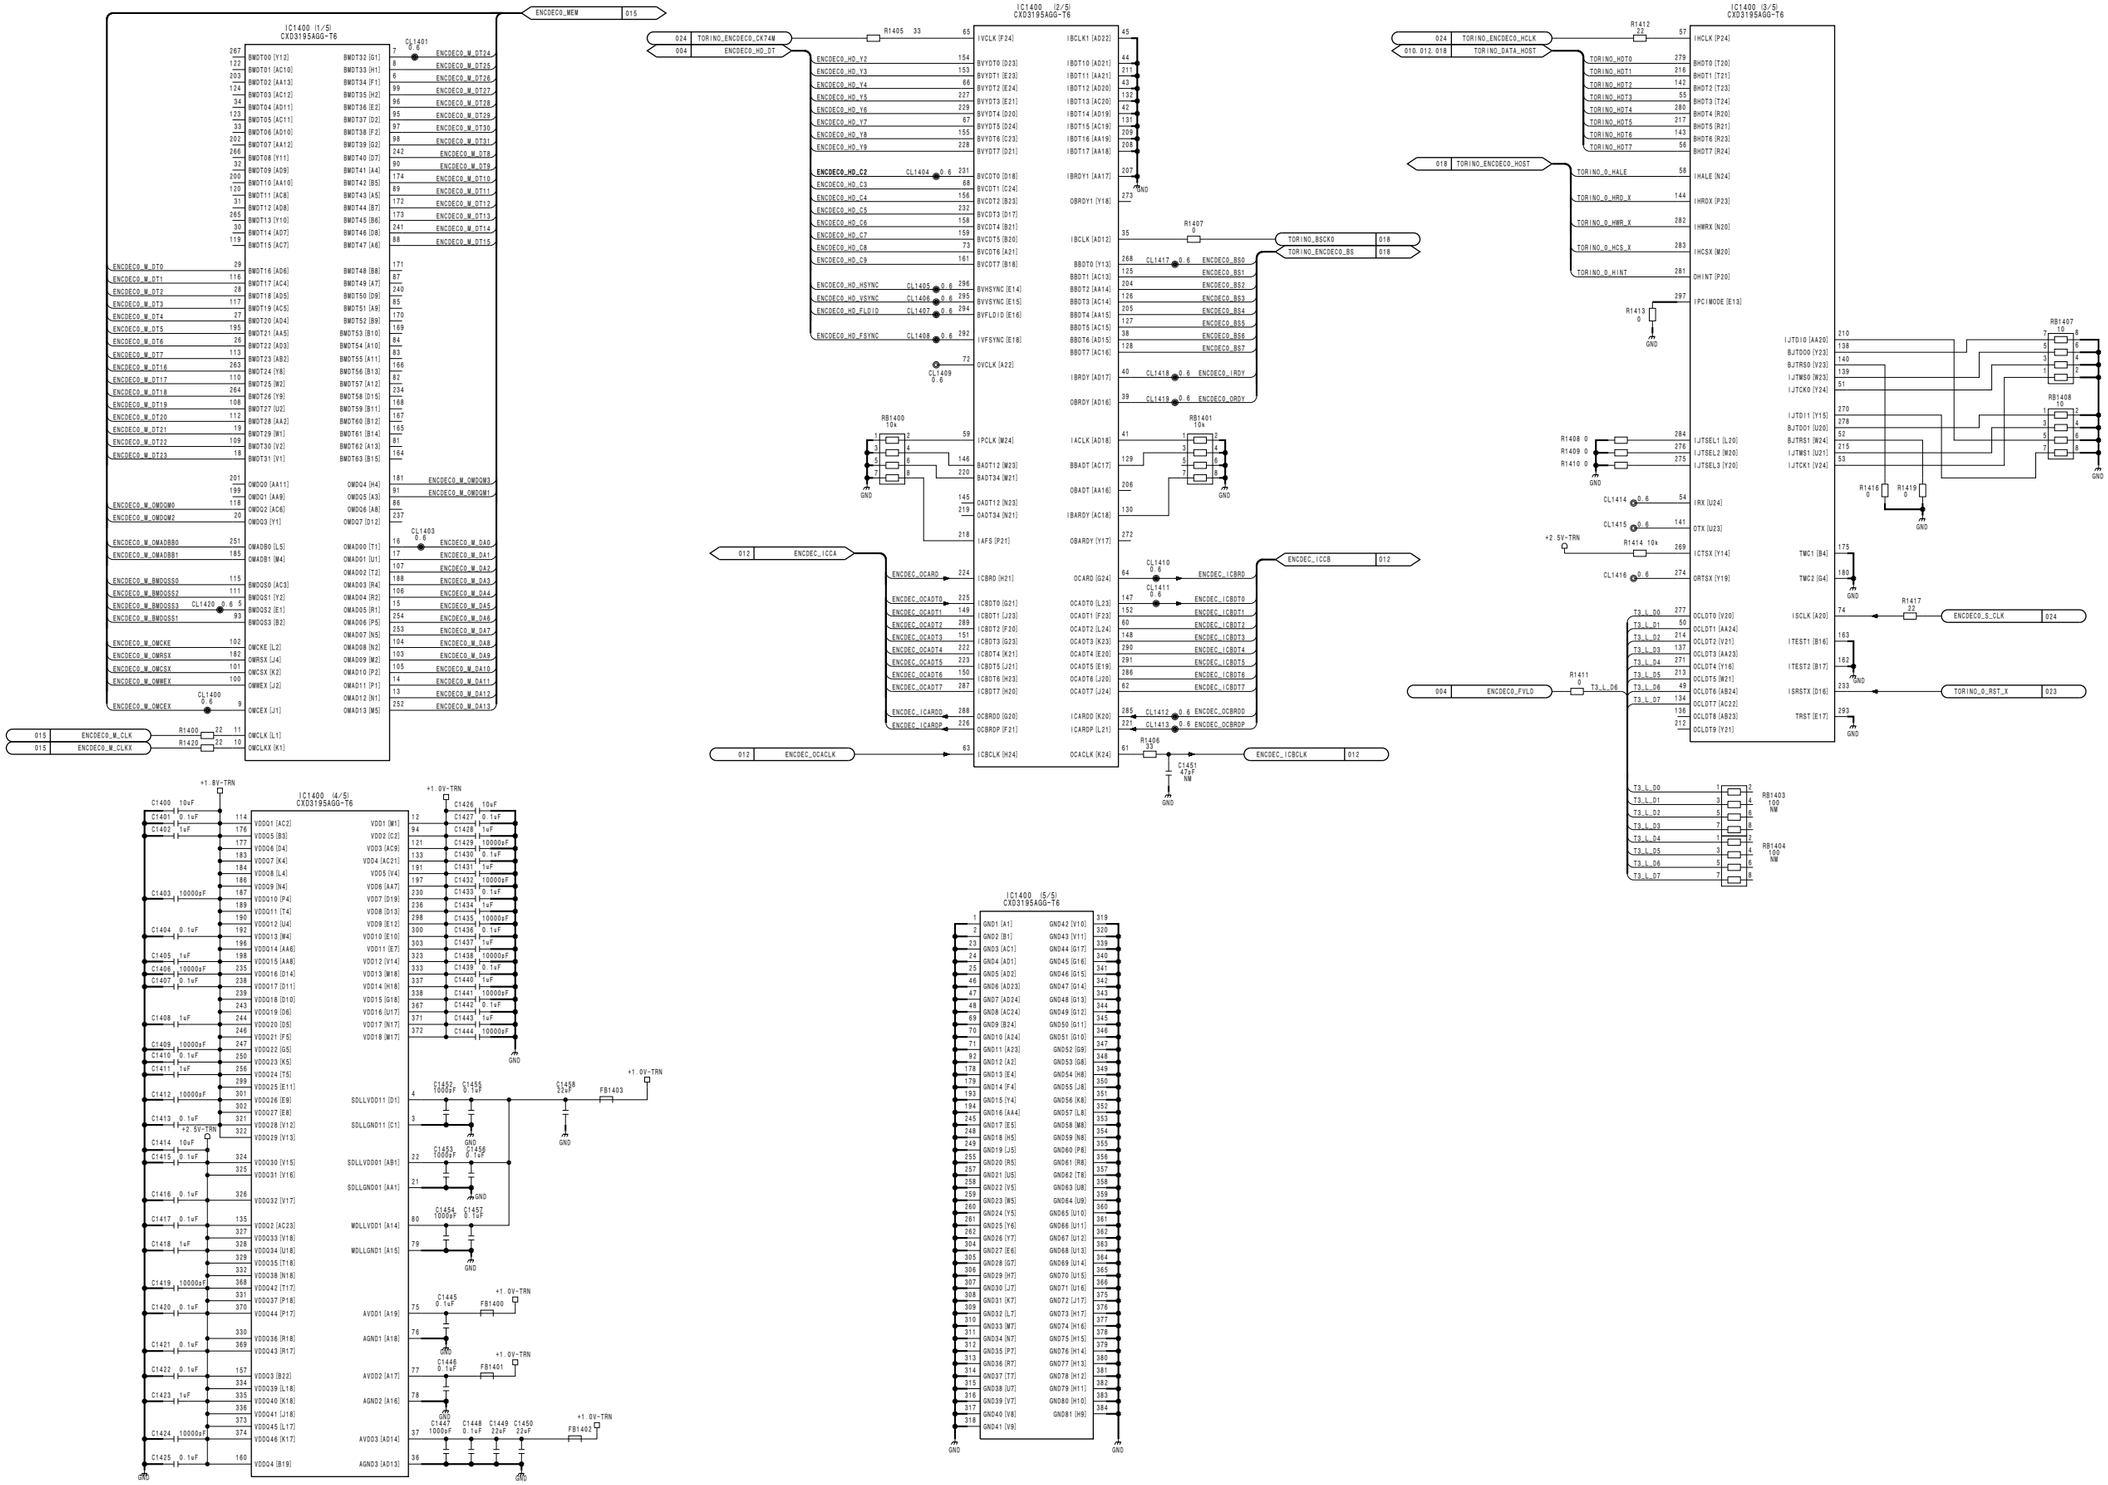

DVP-45 (14/25)
BOARD NO. 1-876-847-12
PDW-700_DVP-45_012_14


DVP-45 (15/25)
SUFFIX: -12

Mobile DDR SDRAM

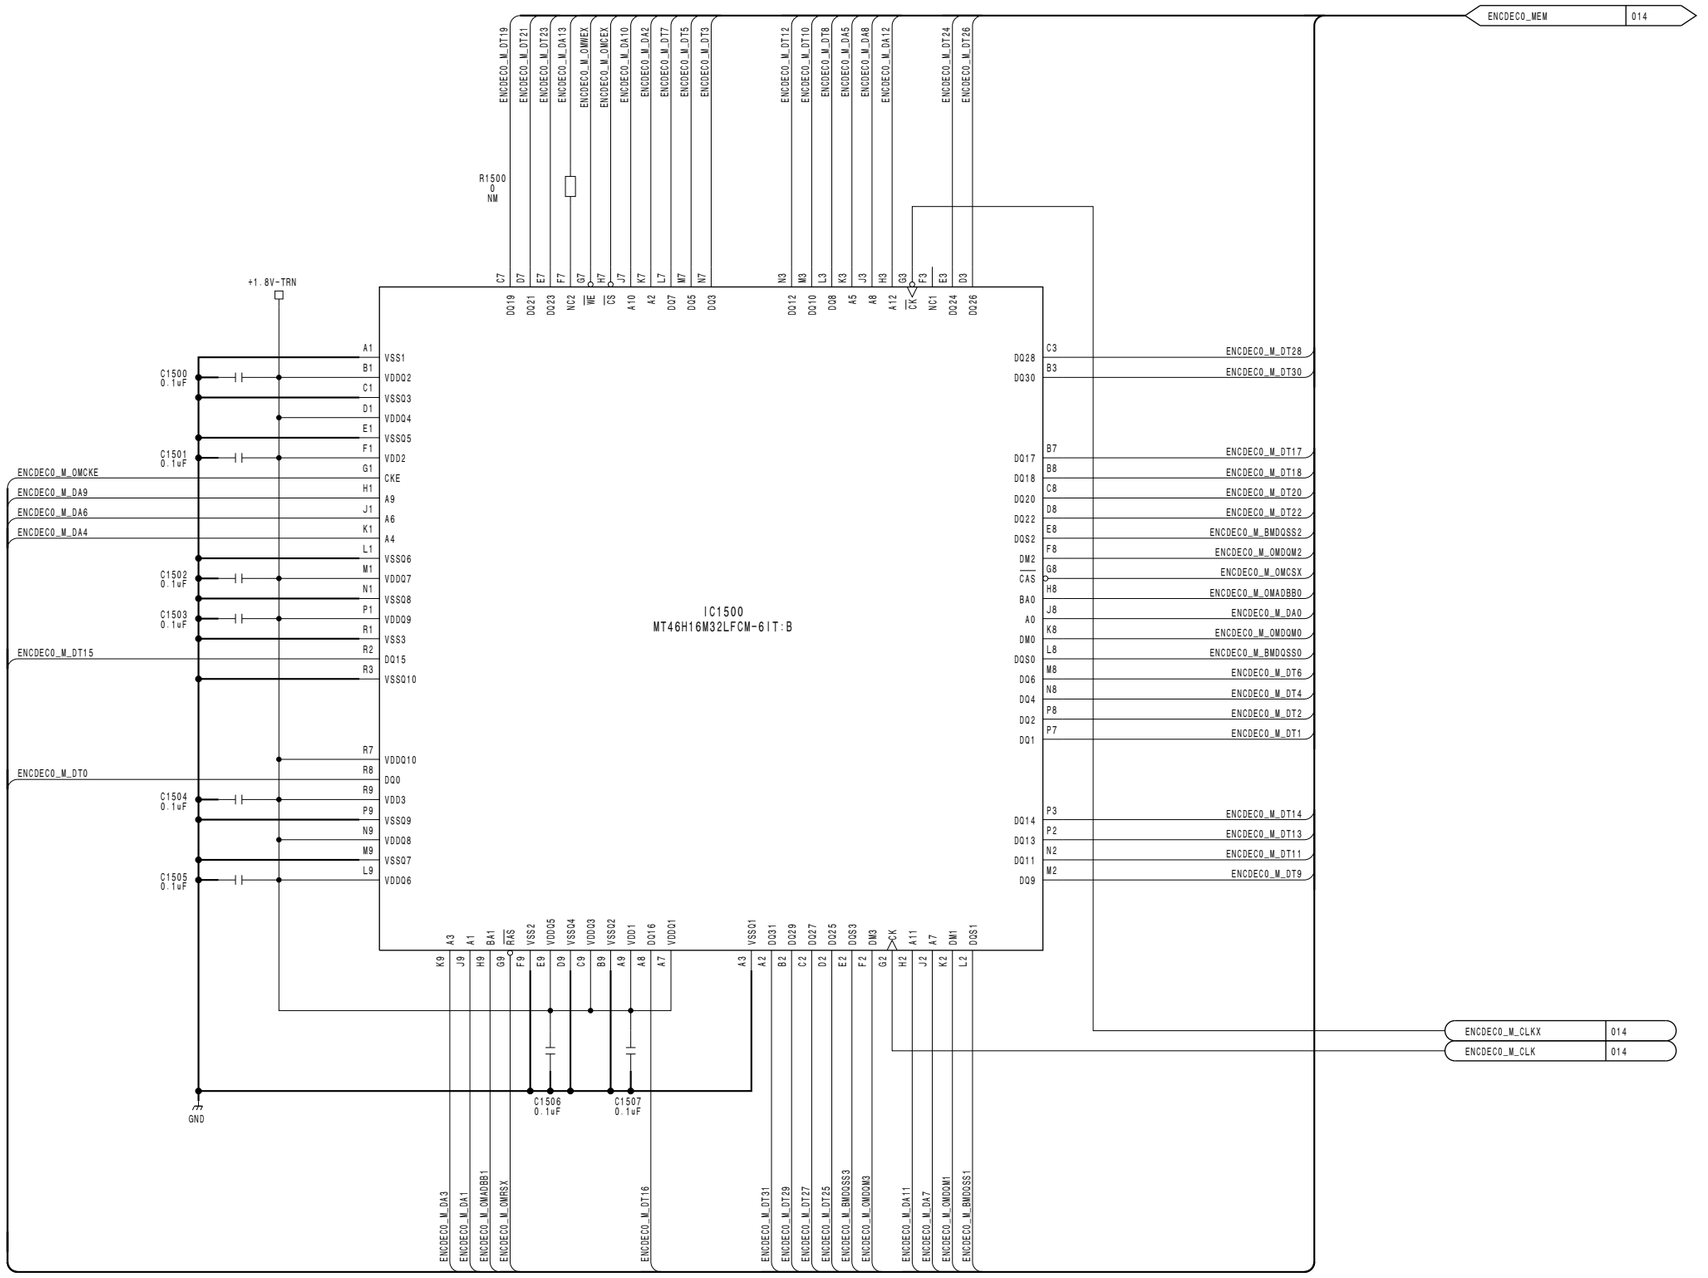

3-58

DVP-45 (16/25)
SUFFIX: -12

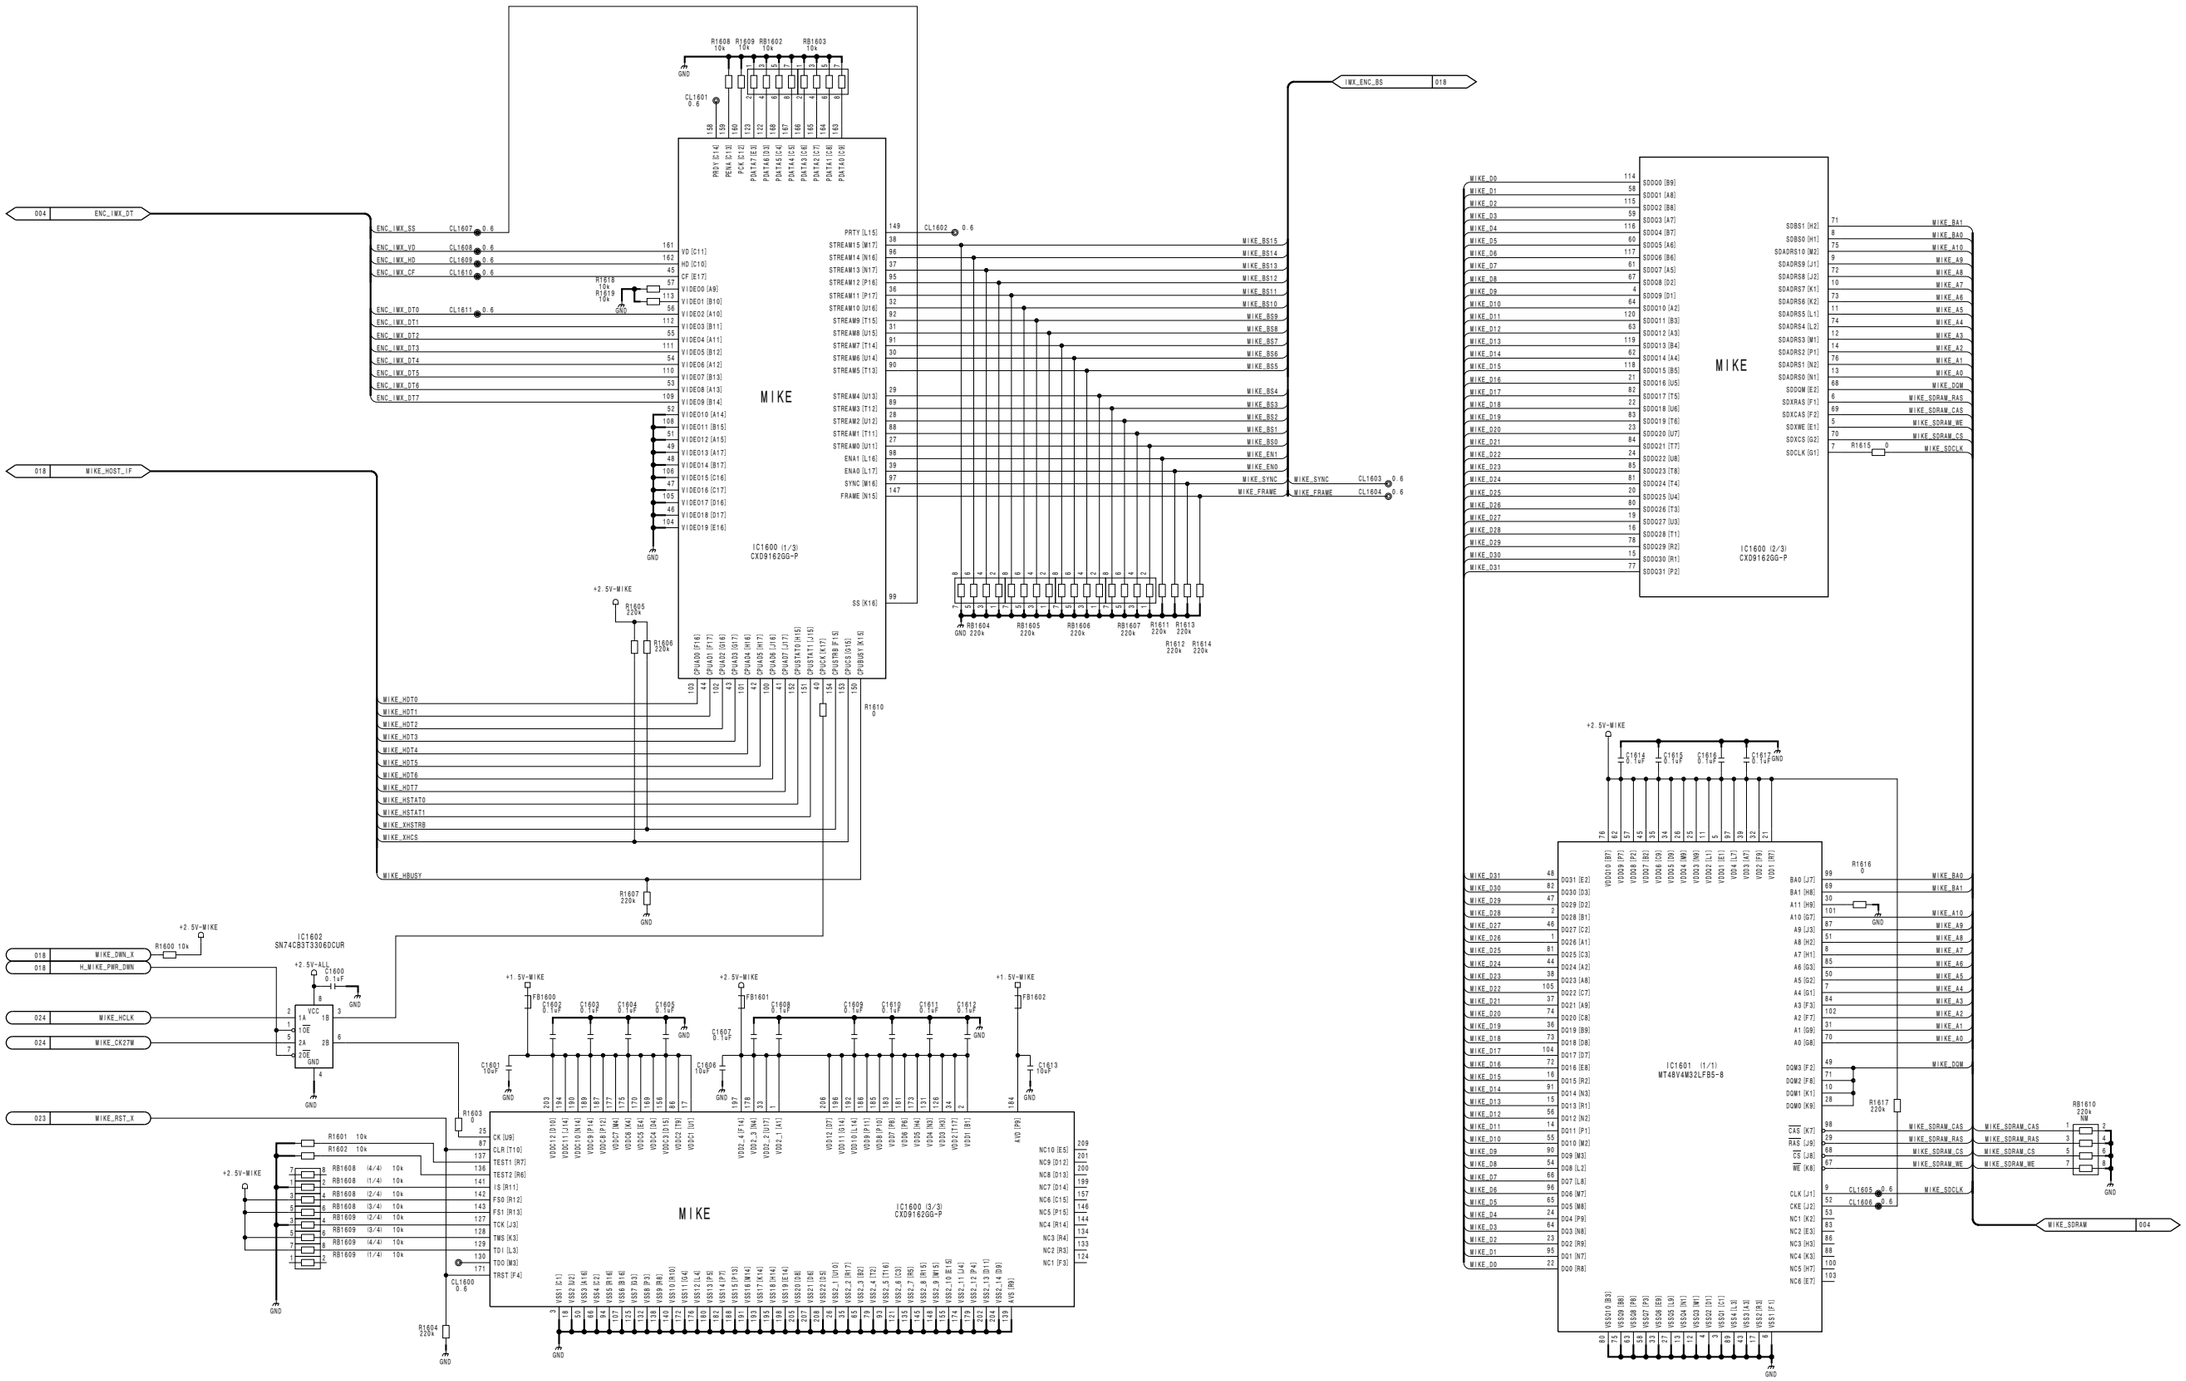


3-59

DVP-45 (16/25)
BOARD NO. 1-876-847-12
PDW-700_DVP-45_012_16

DVP-45 (17/25)
SUFFIX: -12

PIER-G4 (4/10)

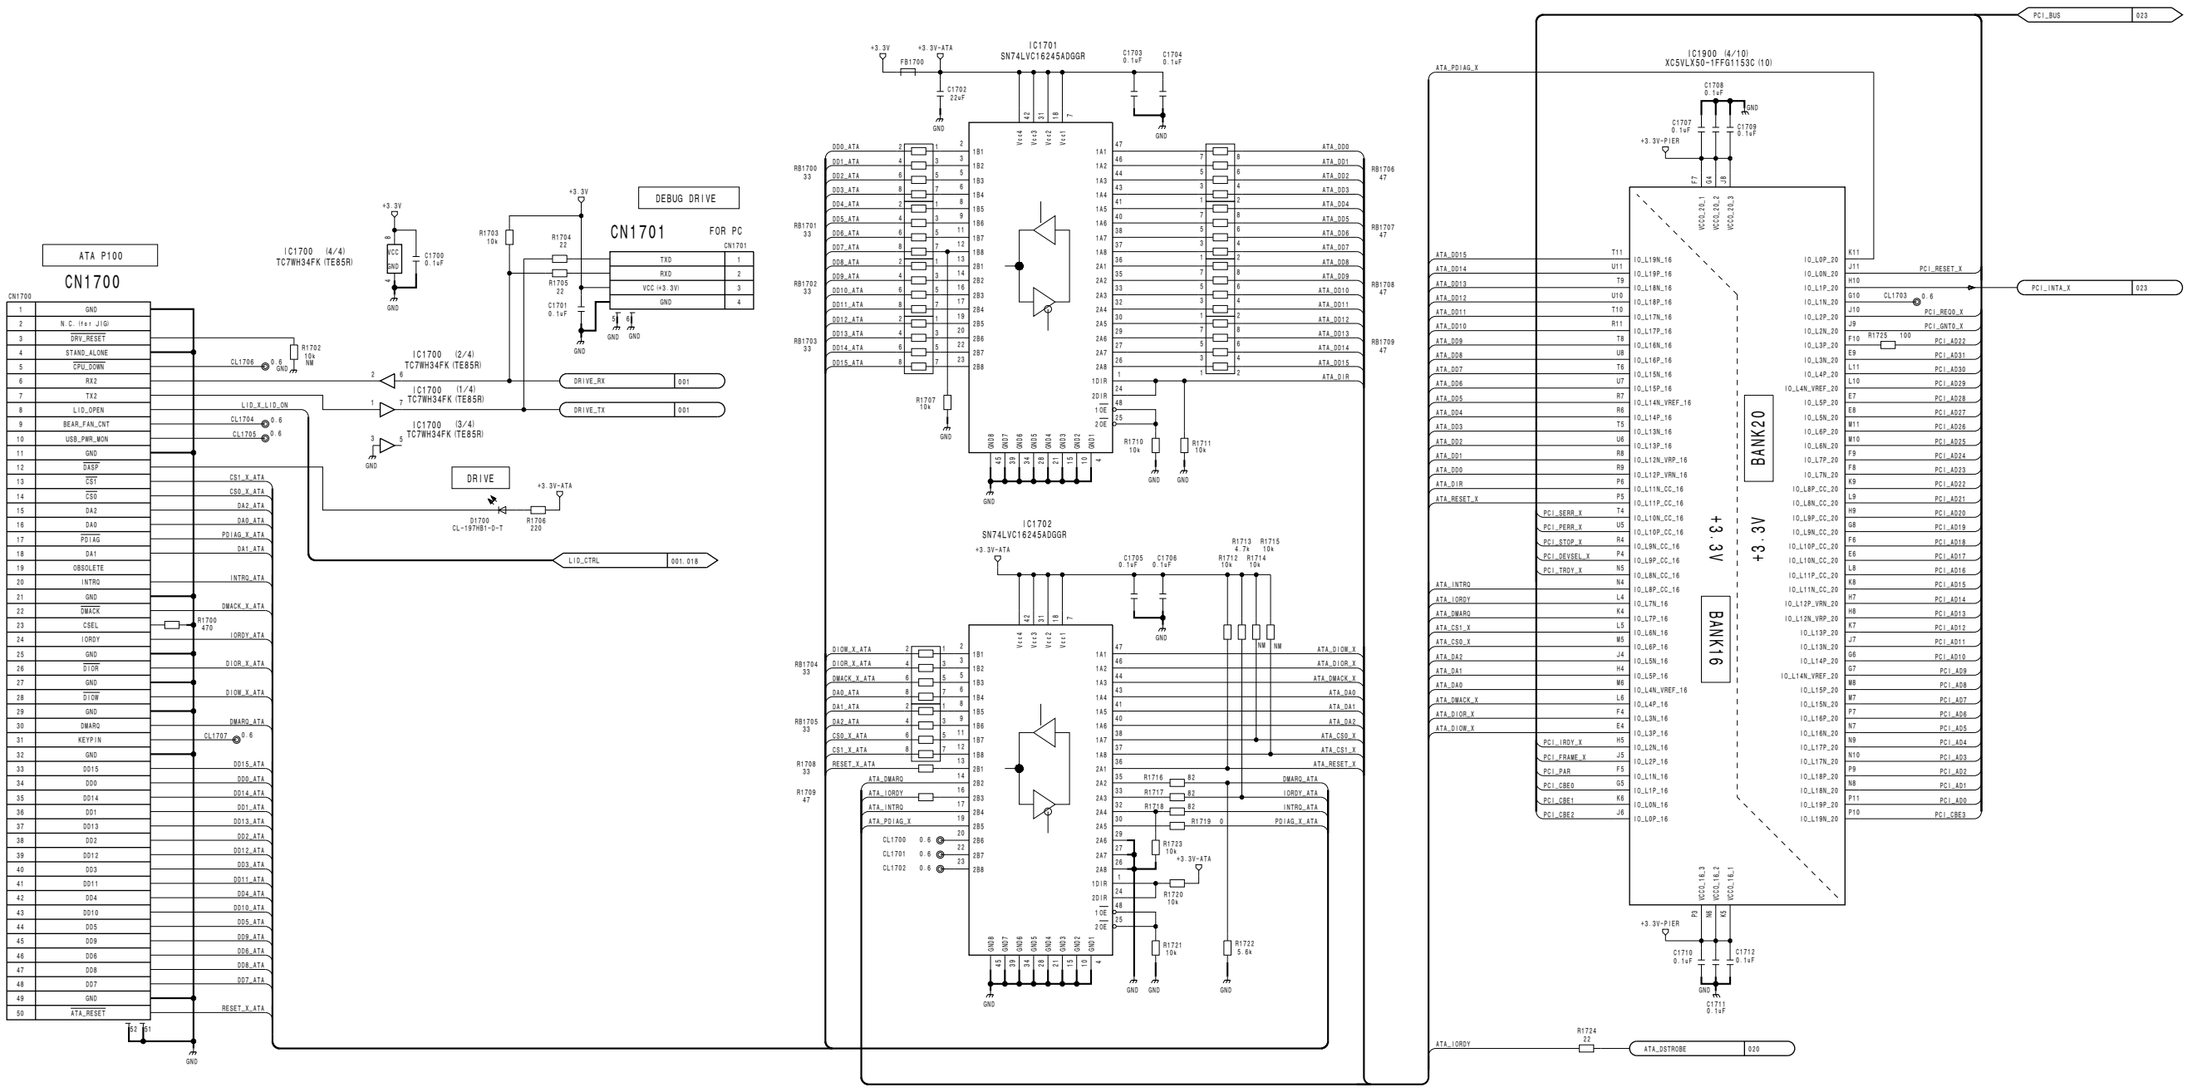


3-60


DVP-45 (17/25)
BOARD NO. 1-876-847-12
PDW-700_DVP-45_012_17

PDW-F800/V2 (J,E)


PIER-G4 (3/10)

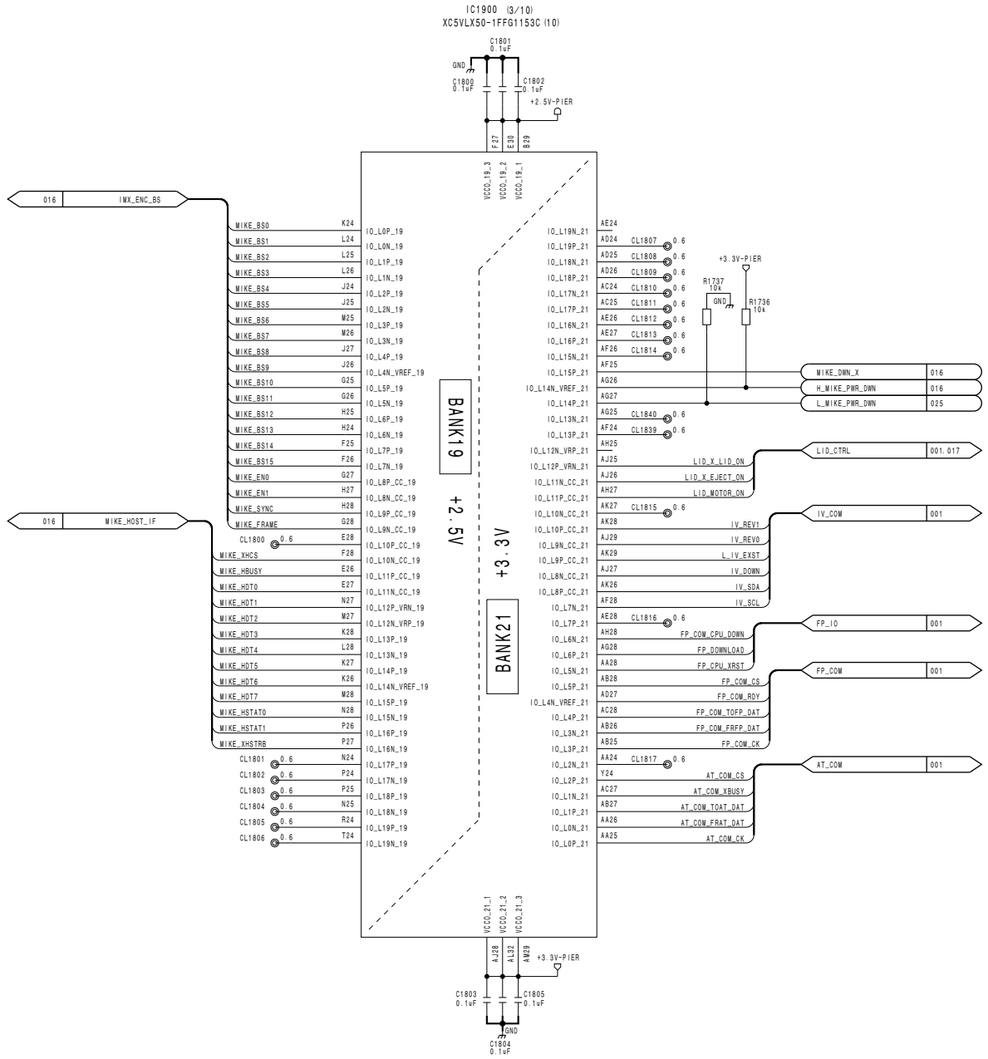

PIER-G4 (5/10)

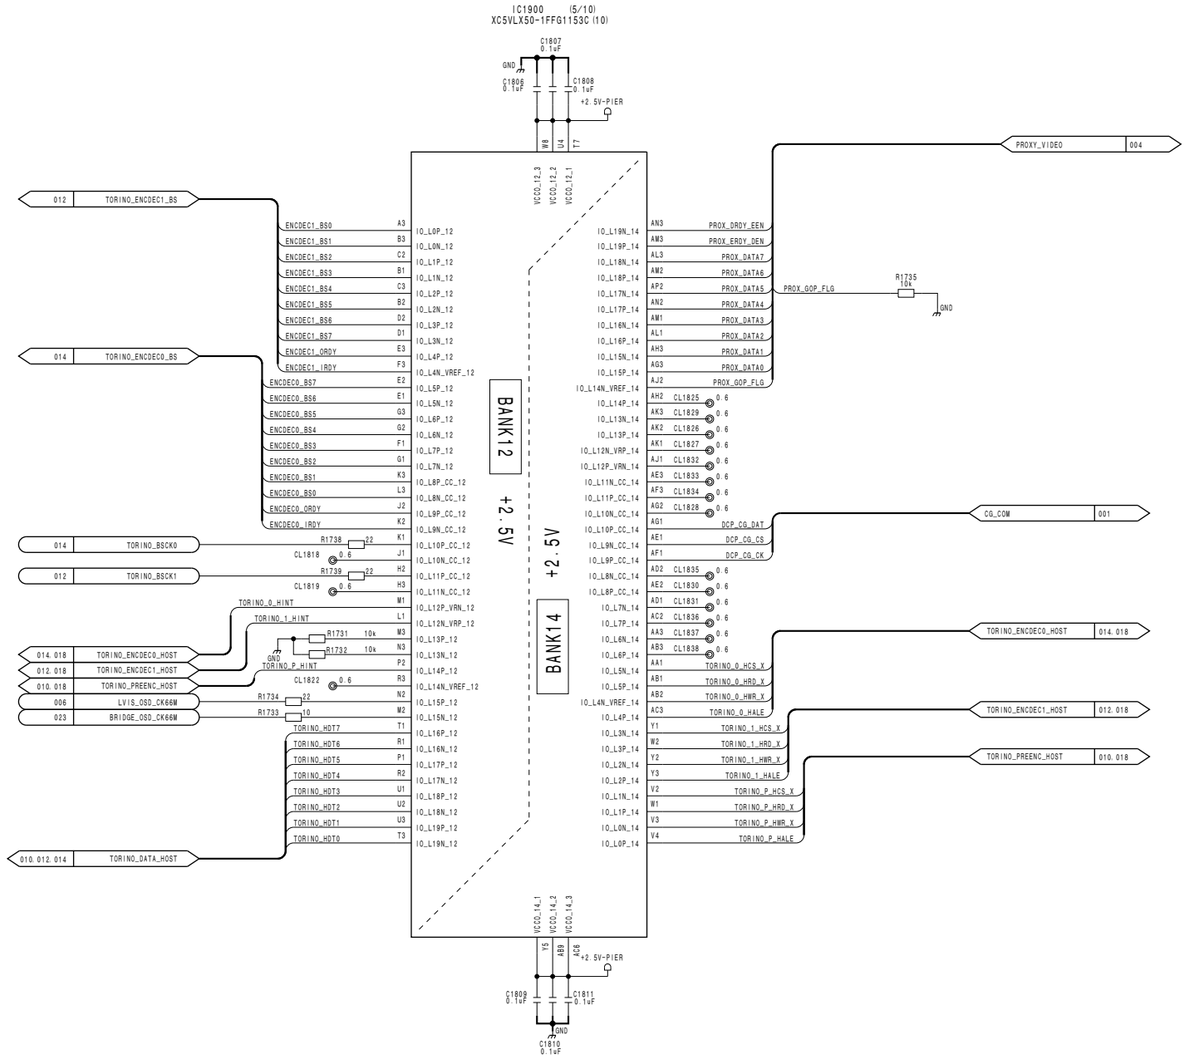

DVP-45 (19/25)
SUFFIX: -12

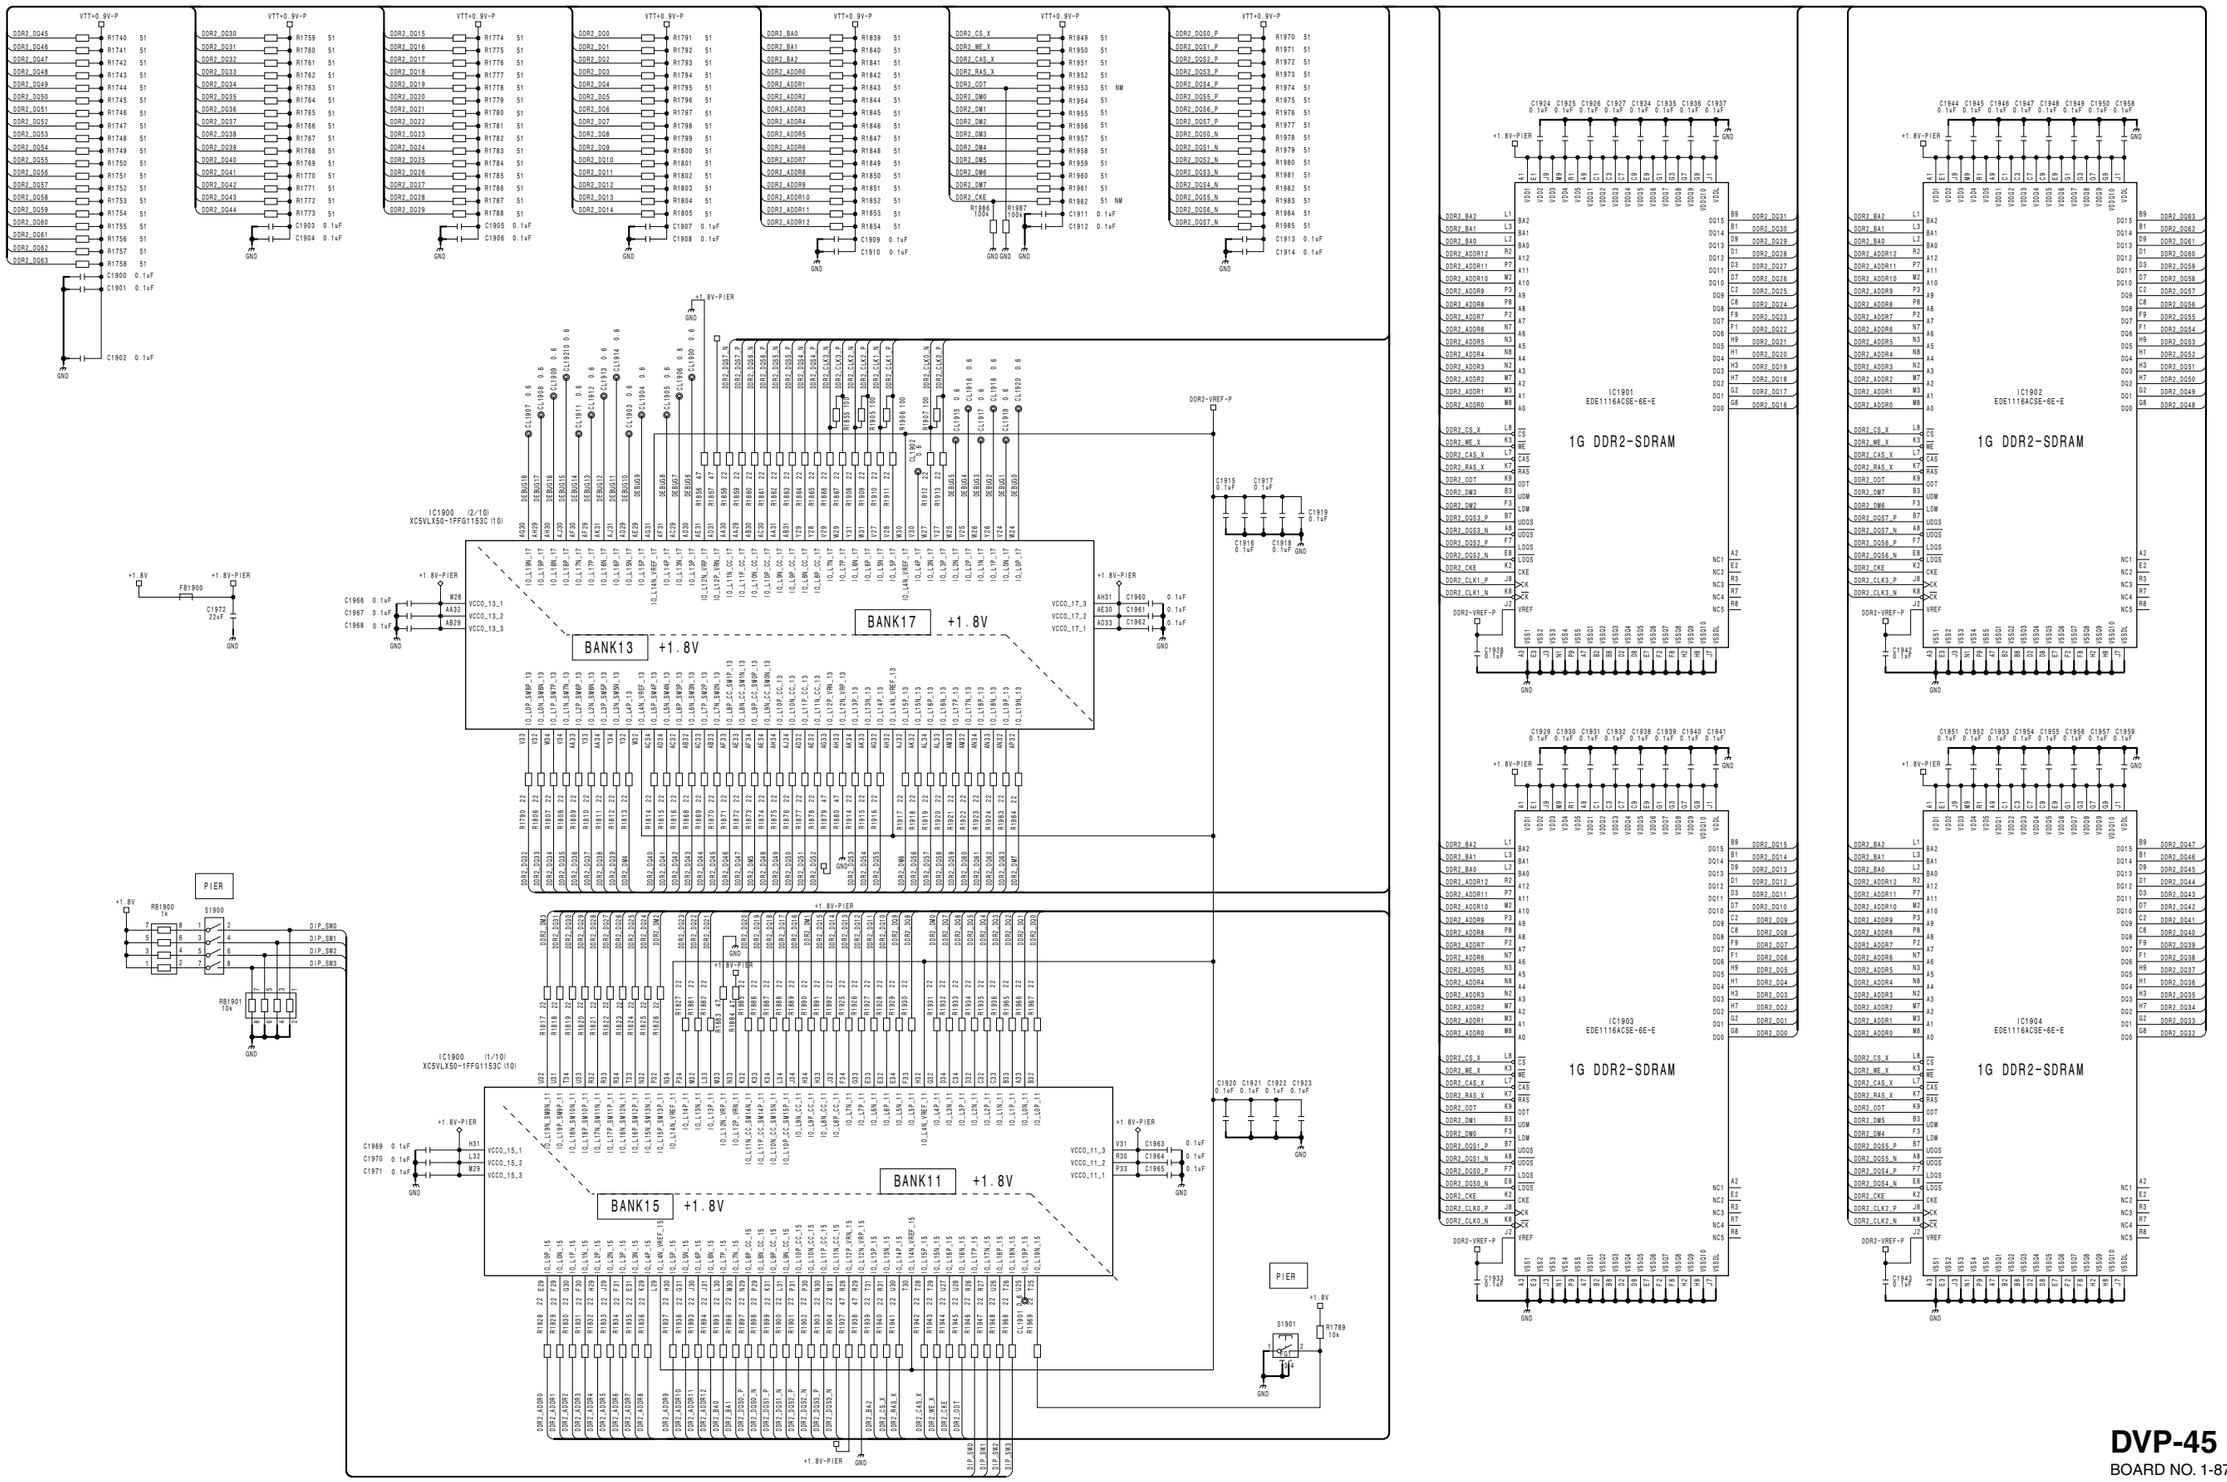

3-62


DVP-45 (19/25)
BOARD NO. 1-876-847-12
PDW-700_DVP-45_012_19

PDW-F800/V2 (J,E)

DVP-45 (20/25)
SUFFIX: -12


PIER-G4 (6/10)


IC1900 (6/10)
XC5VLX50-1FFG1153C (10)

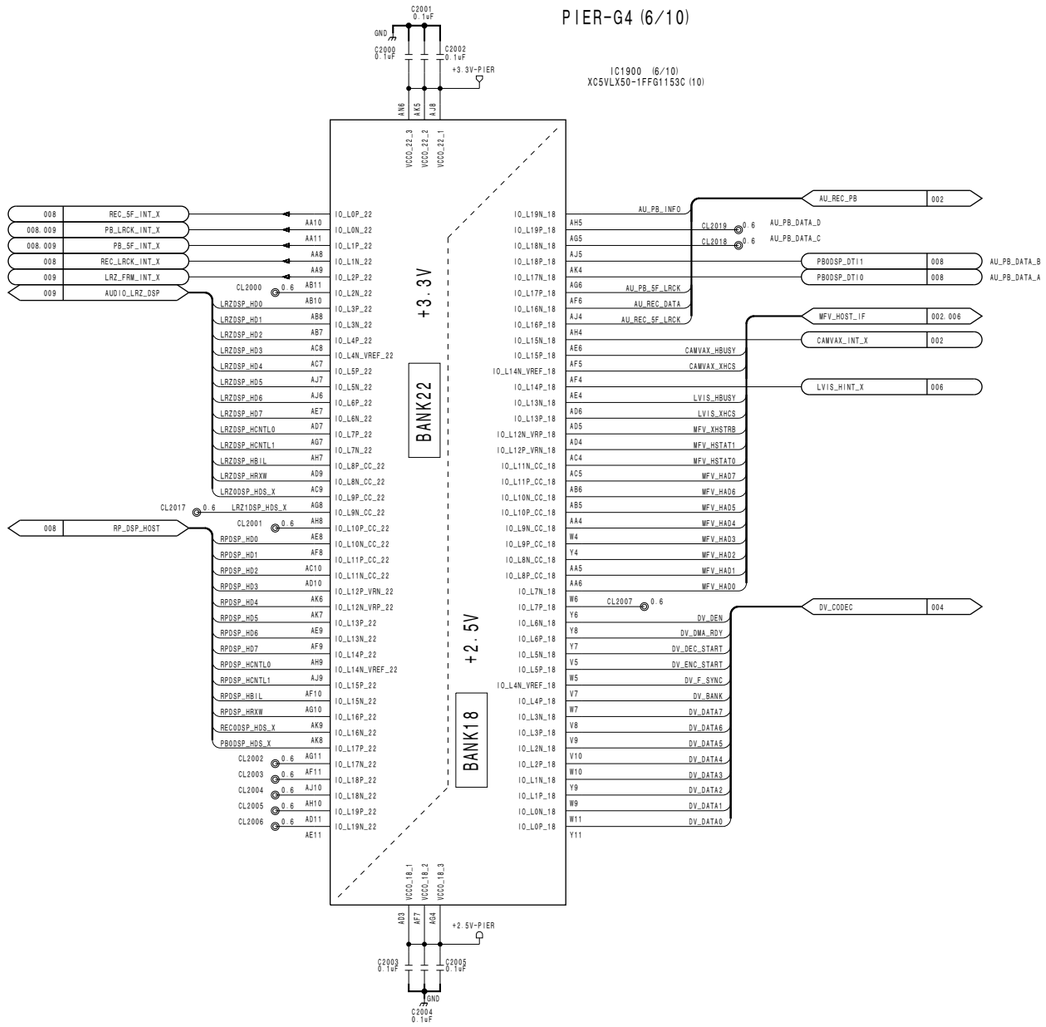

PIER-G4 (7/10)

IC1900 (7/10)
XC5VLX50-1FFG1153C (10)

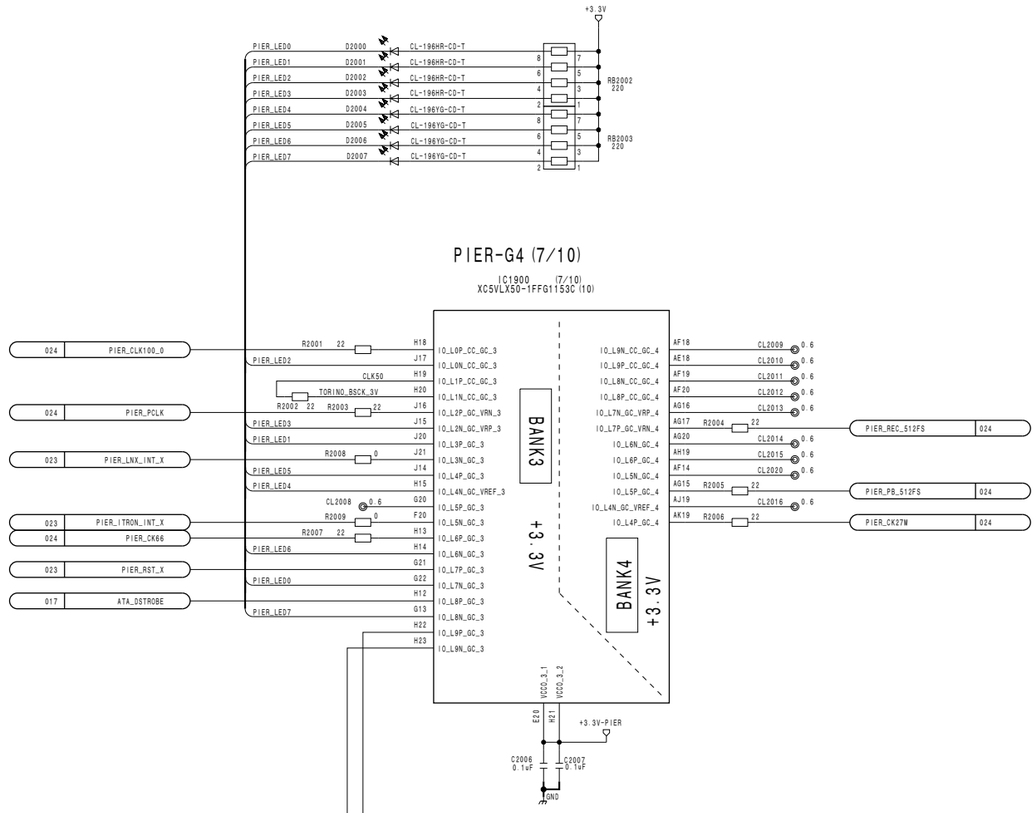


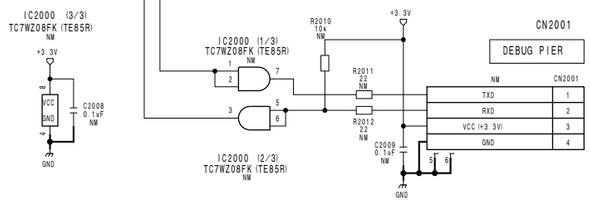

3-63

DVP-45 (20/25)
BOARD NO. 1-876-847-12
PDW-700_DVP-45_012_20


DVP-45 (21/25)
SUFFIX: -12

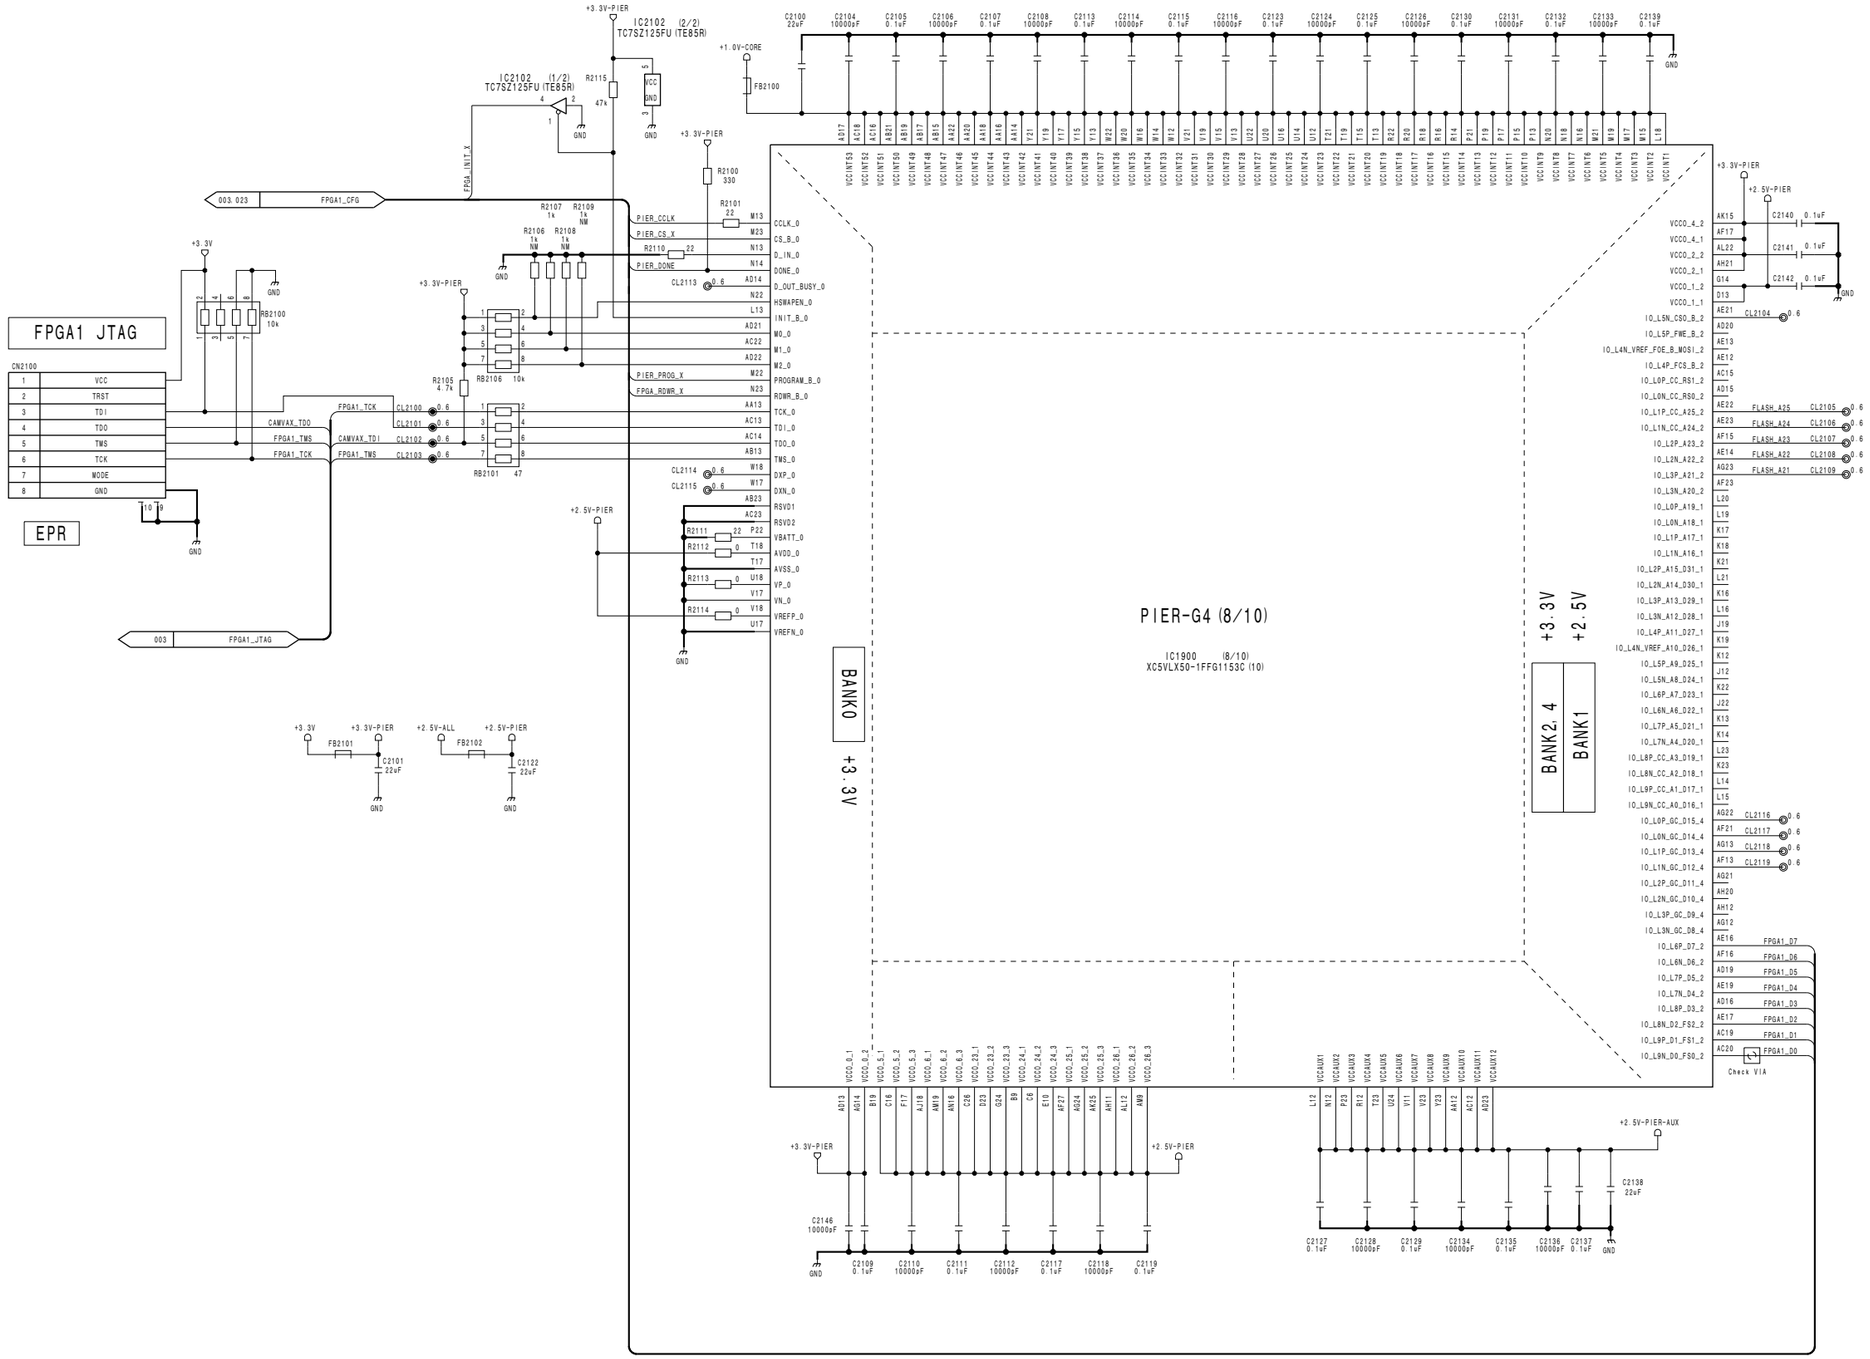

3-64

DVP-45 (21/25)
BOARD NO. 1-876-847-12
PDW-700_DVP-45_012_21

PDW-F800/V2 (J,E)

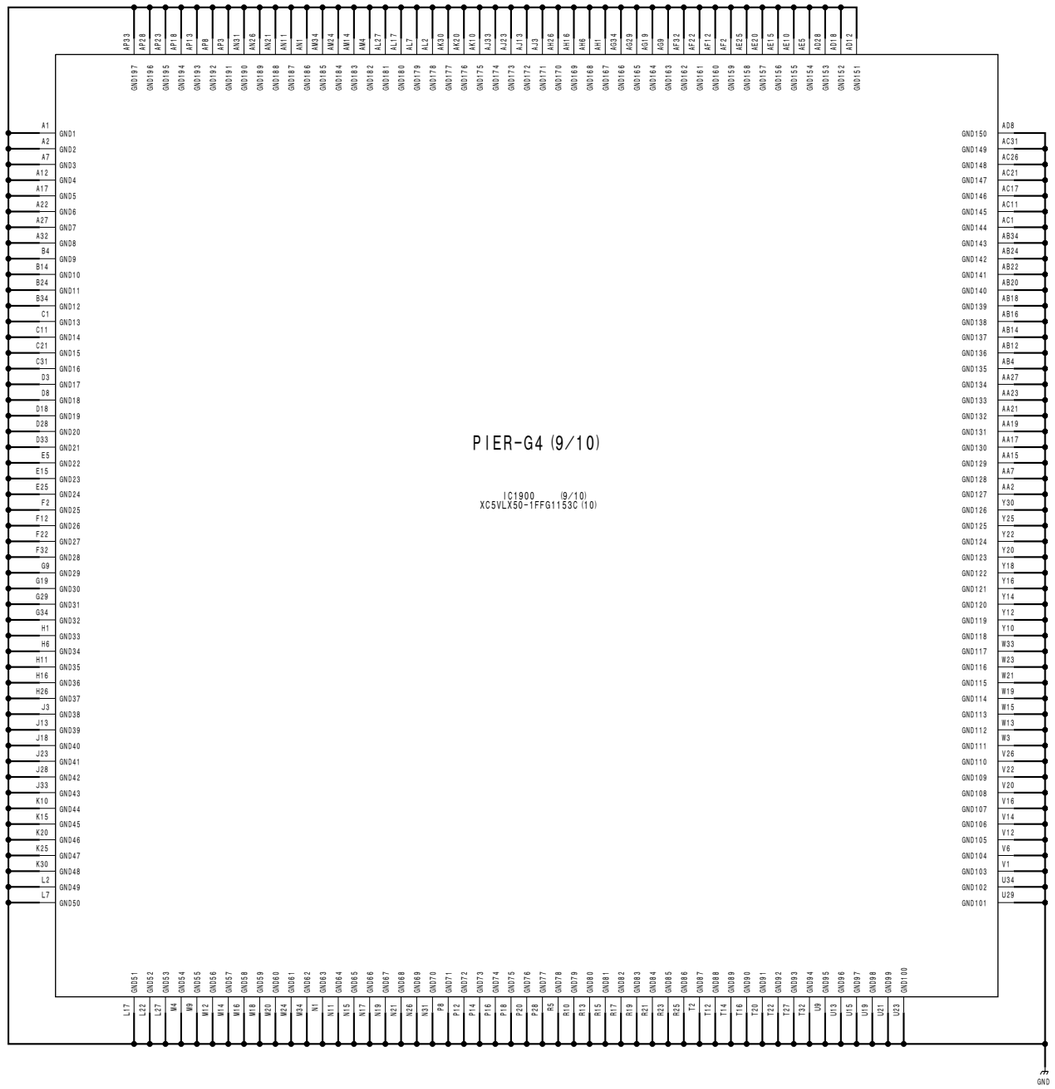




DVP-45 (22/25)
BOARD NO. 1-876-847-12
PDW-700_DVP-45_012_22

DVP-45 (23/25)
SUFFIX: -12

CN2300 SY-355

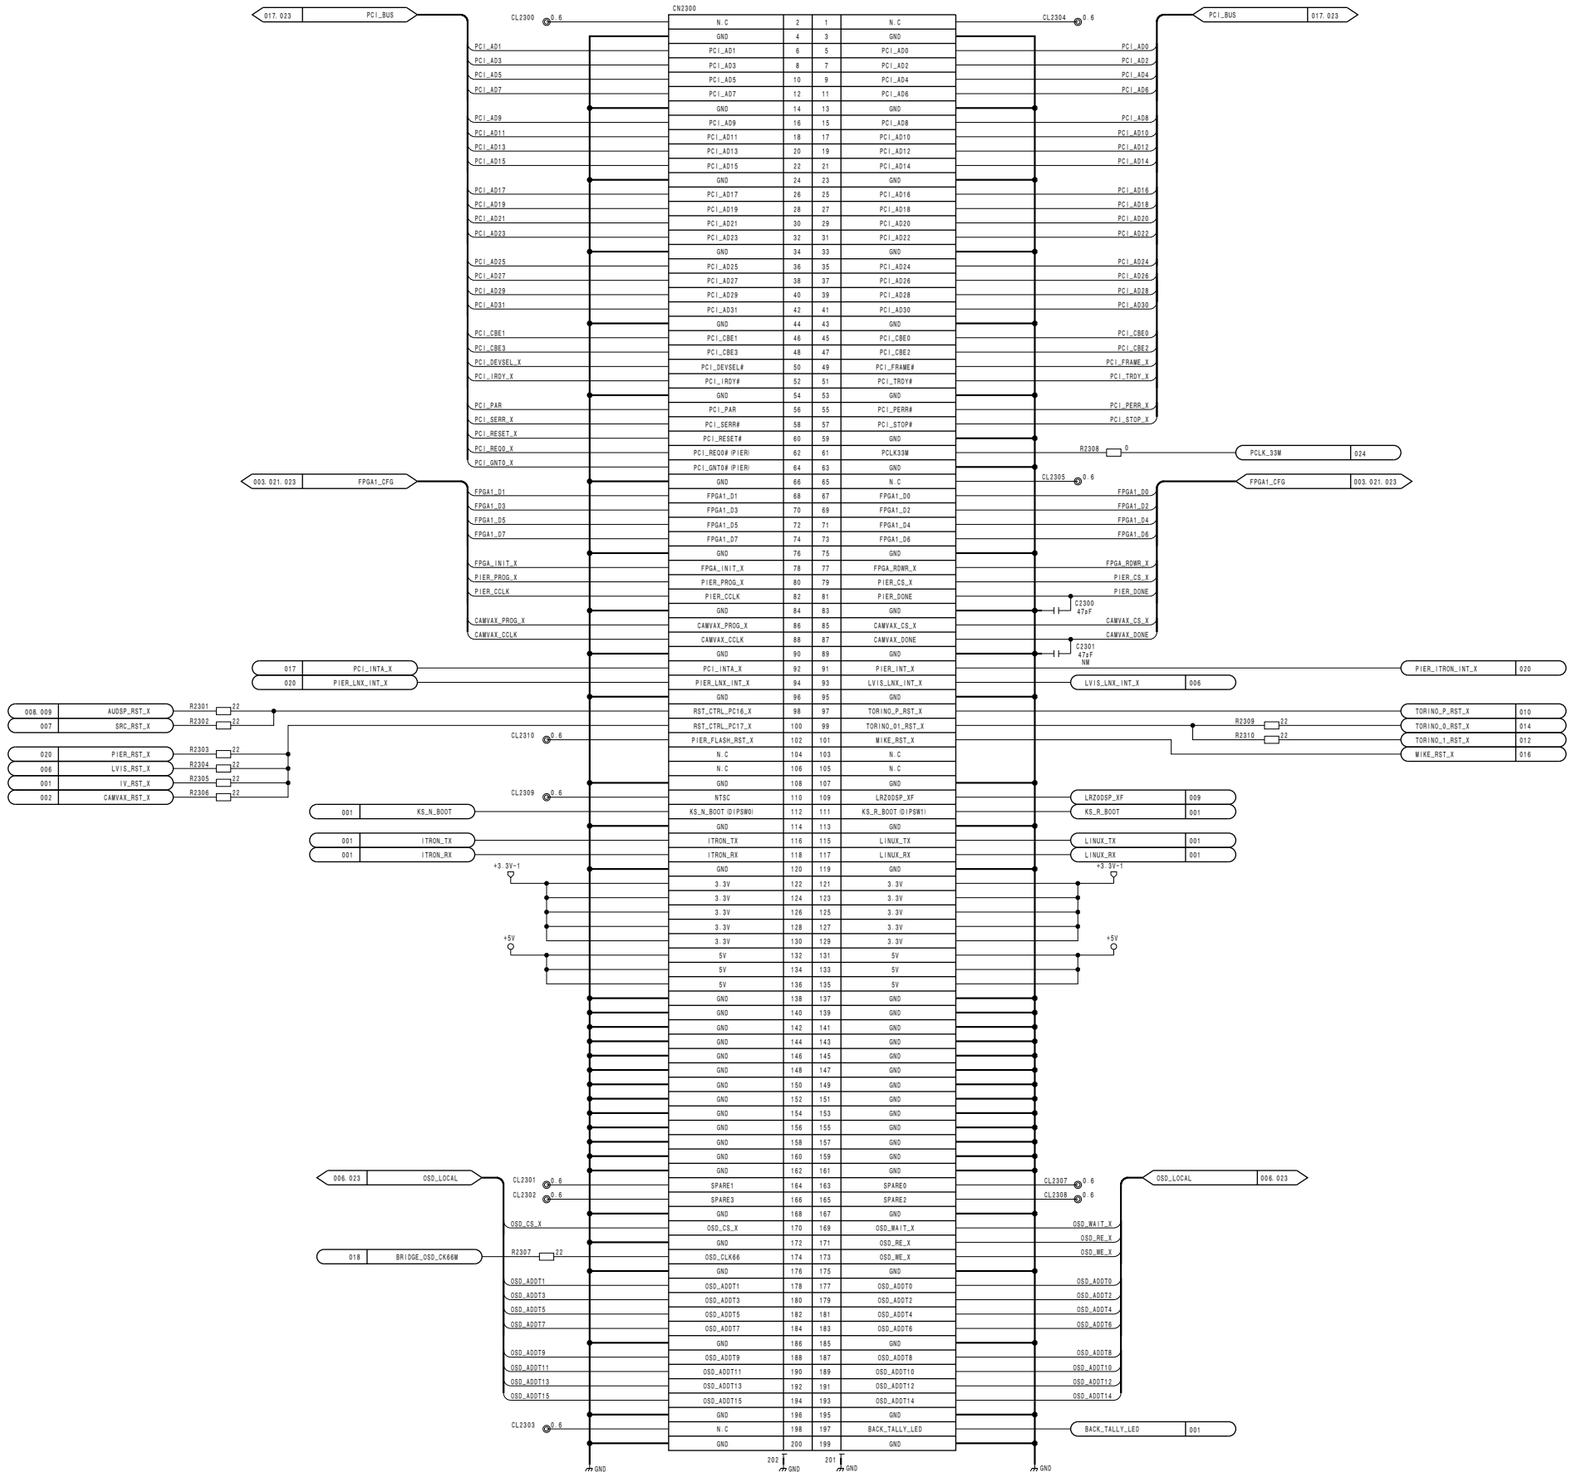


3-66

DVP-45 (23/25)
BOARD NO. 1-876-847-12
PDW-700_DVP-45_012_23


PDW-F800/V2 (J,E)

DVP-45 (24/25) **SUFFIX: -12**


CAM 74MHz

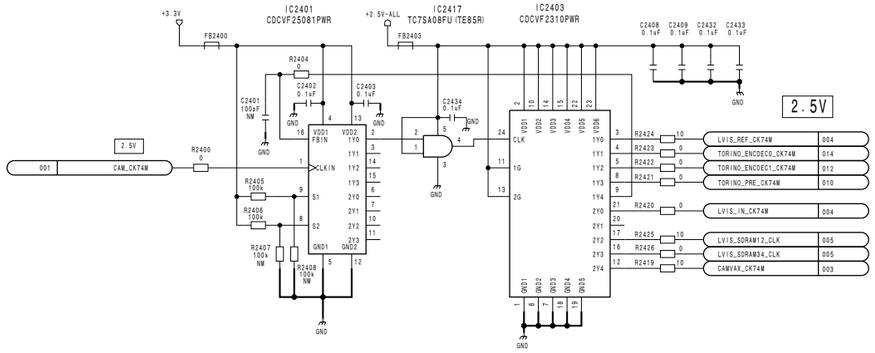


CAM 512FS

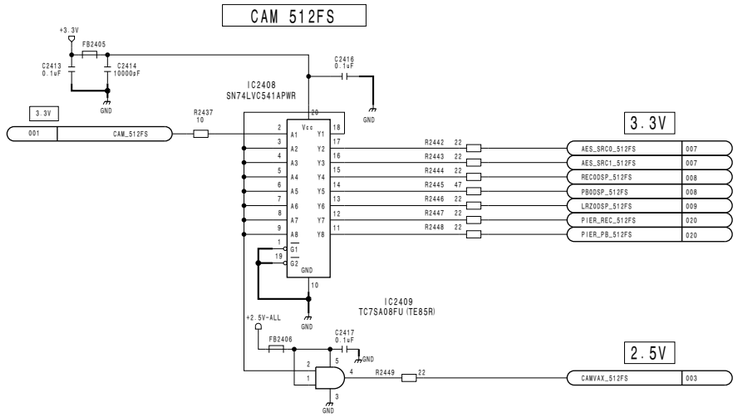


66MHz

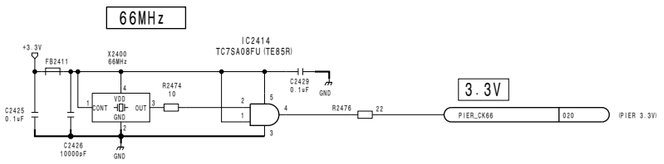


CAM 27MHz

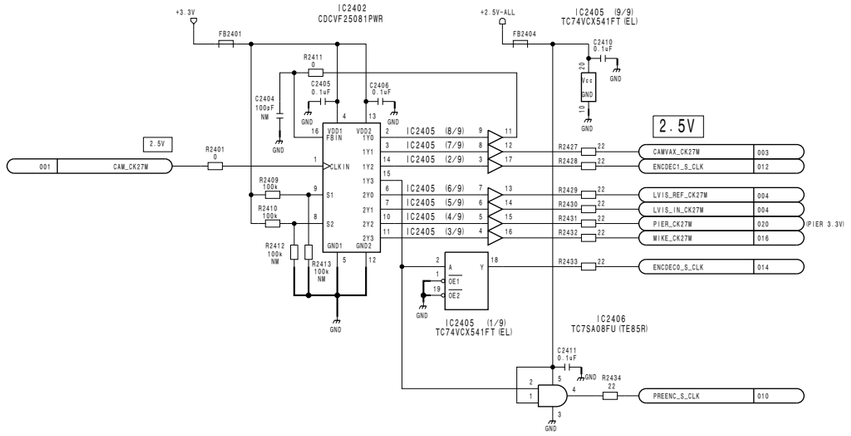


AU 256FS | AU 64FS | AU FS

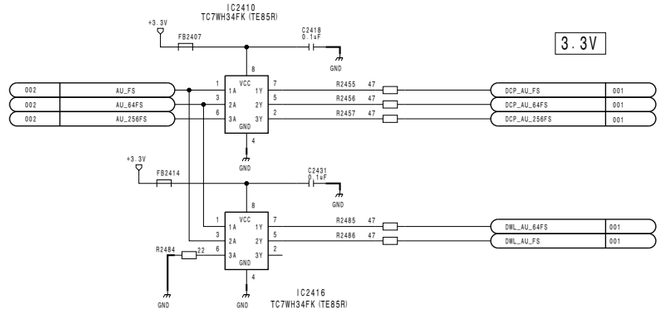

100MHz

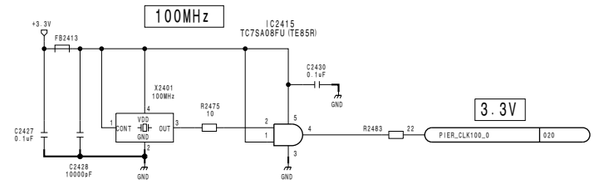

33MHz

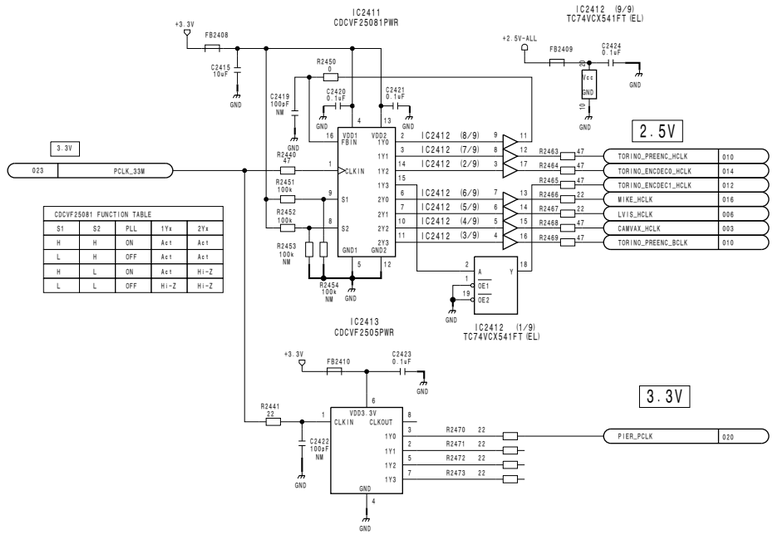

S1	S2	PLL	1Yx	2Yx
H	H	ON	Act	Act
L	H	OFF	Act	Act
H	L	ON	Act	Hi-Z
L	L	OFF	Hi-Z	Hi-Z

DVP-45 (24/25)
BOARD NO. 1-876-847-12
PDW-700_DVP-45_012_24

DVP-45 (25/25)
SUFFIX: -12

2.5V (ALL)

2.5V (PIER-AUX)

DDR2-SDRAM (for LVIS)

DDR2-SDRAM (for PIER-G4)

1.2V (CAMVAX/LVIS Core)


1.5V (DSP)

1.0V (PIER/TORINO Core)

MIKE

018 L_MIKE_PWR_DOWN

3-68

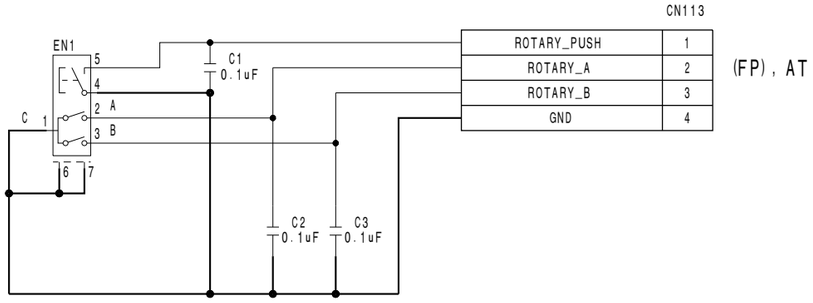


(FP), AT

ENC-118

BOARD NO. 1-877-345-11


VCX-434_ENC-118_011_1

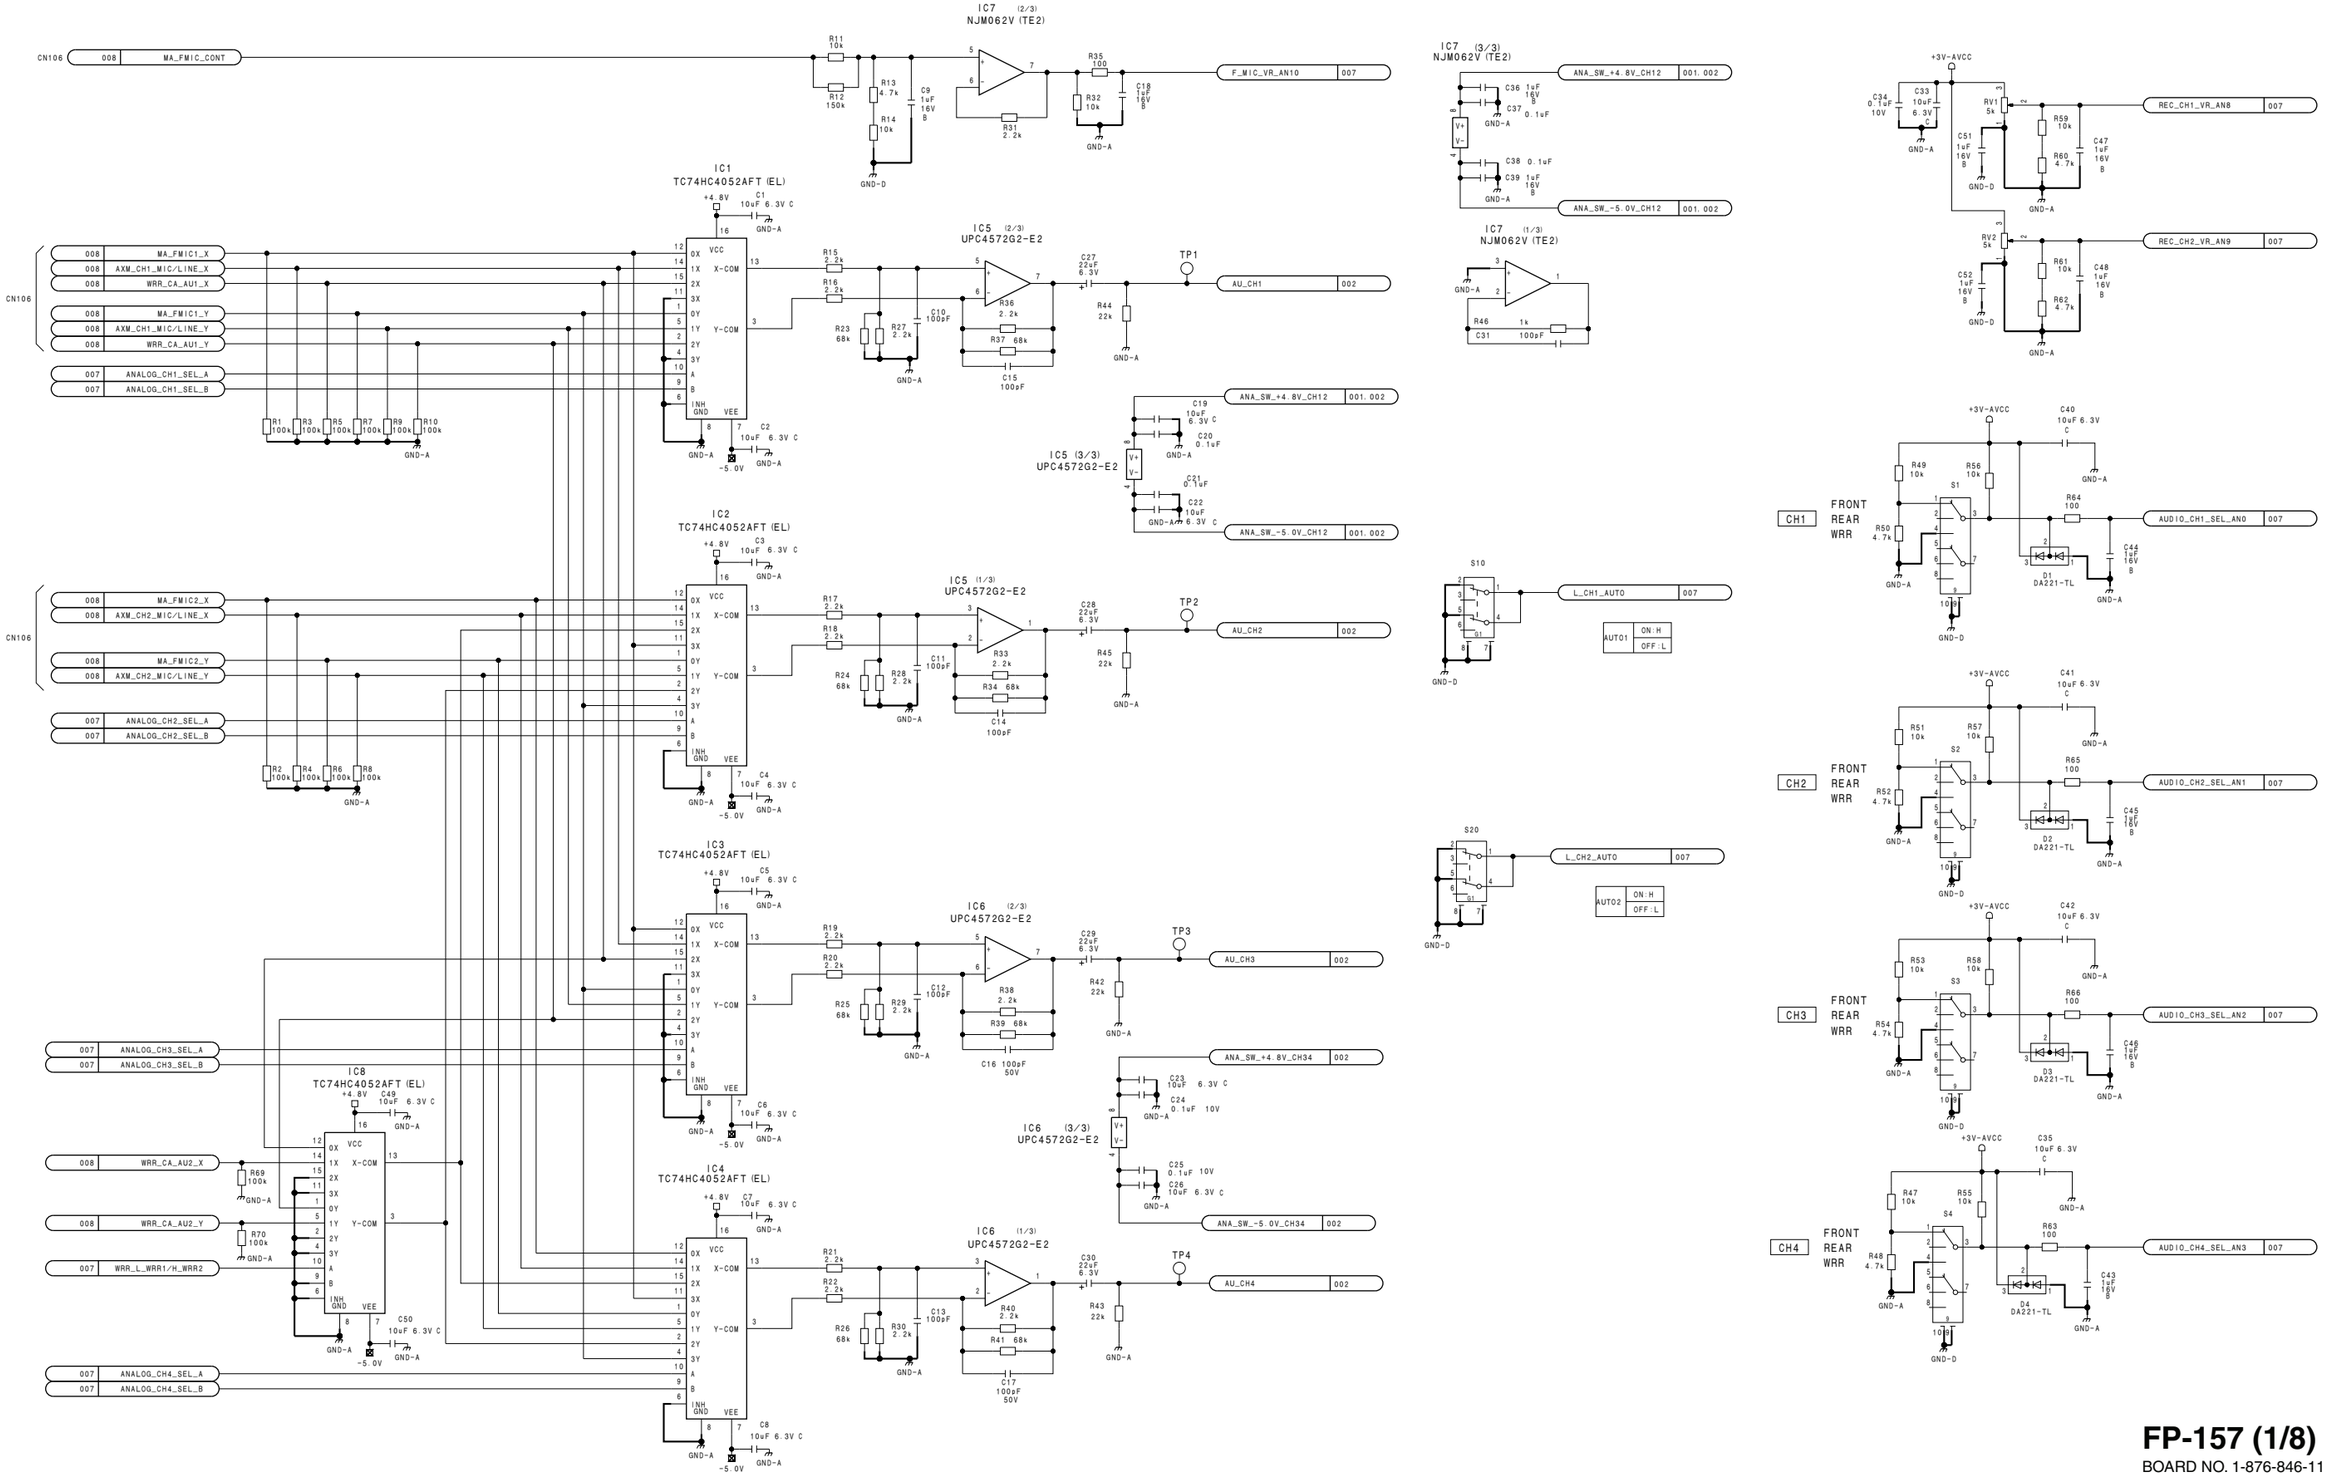


FP-157 (1/8)
BOARD NO. 1-876-846-11
VCX-434_FP-157_011_1

FP-157 (2/8)
SUFFIX: -11


3-72

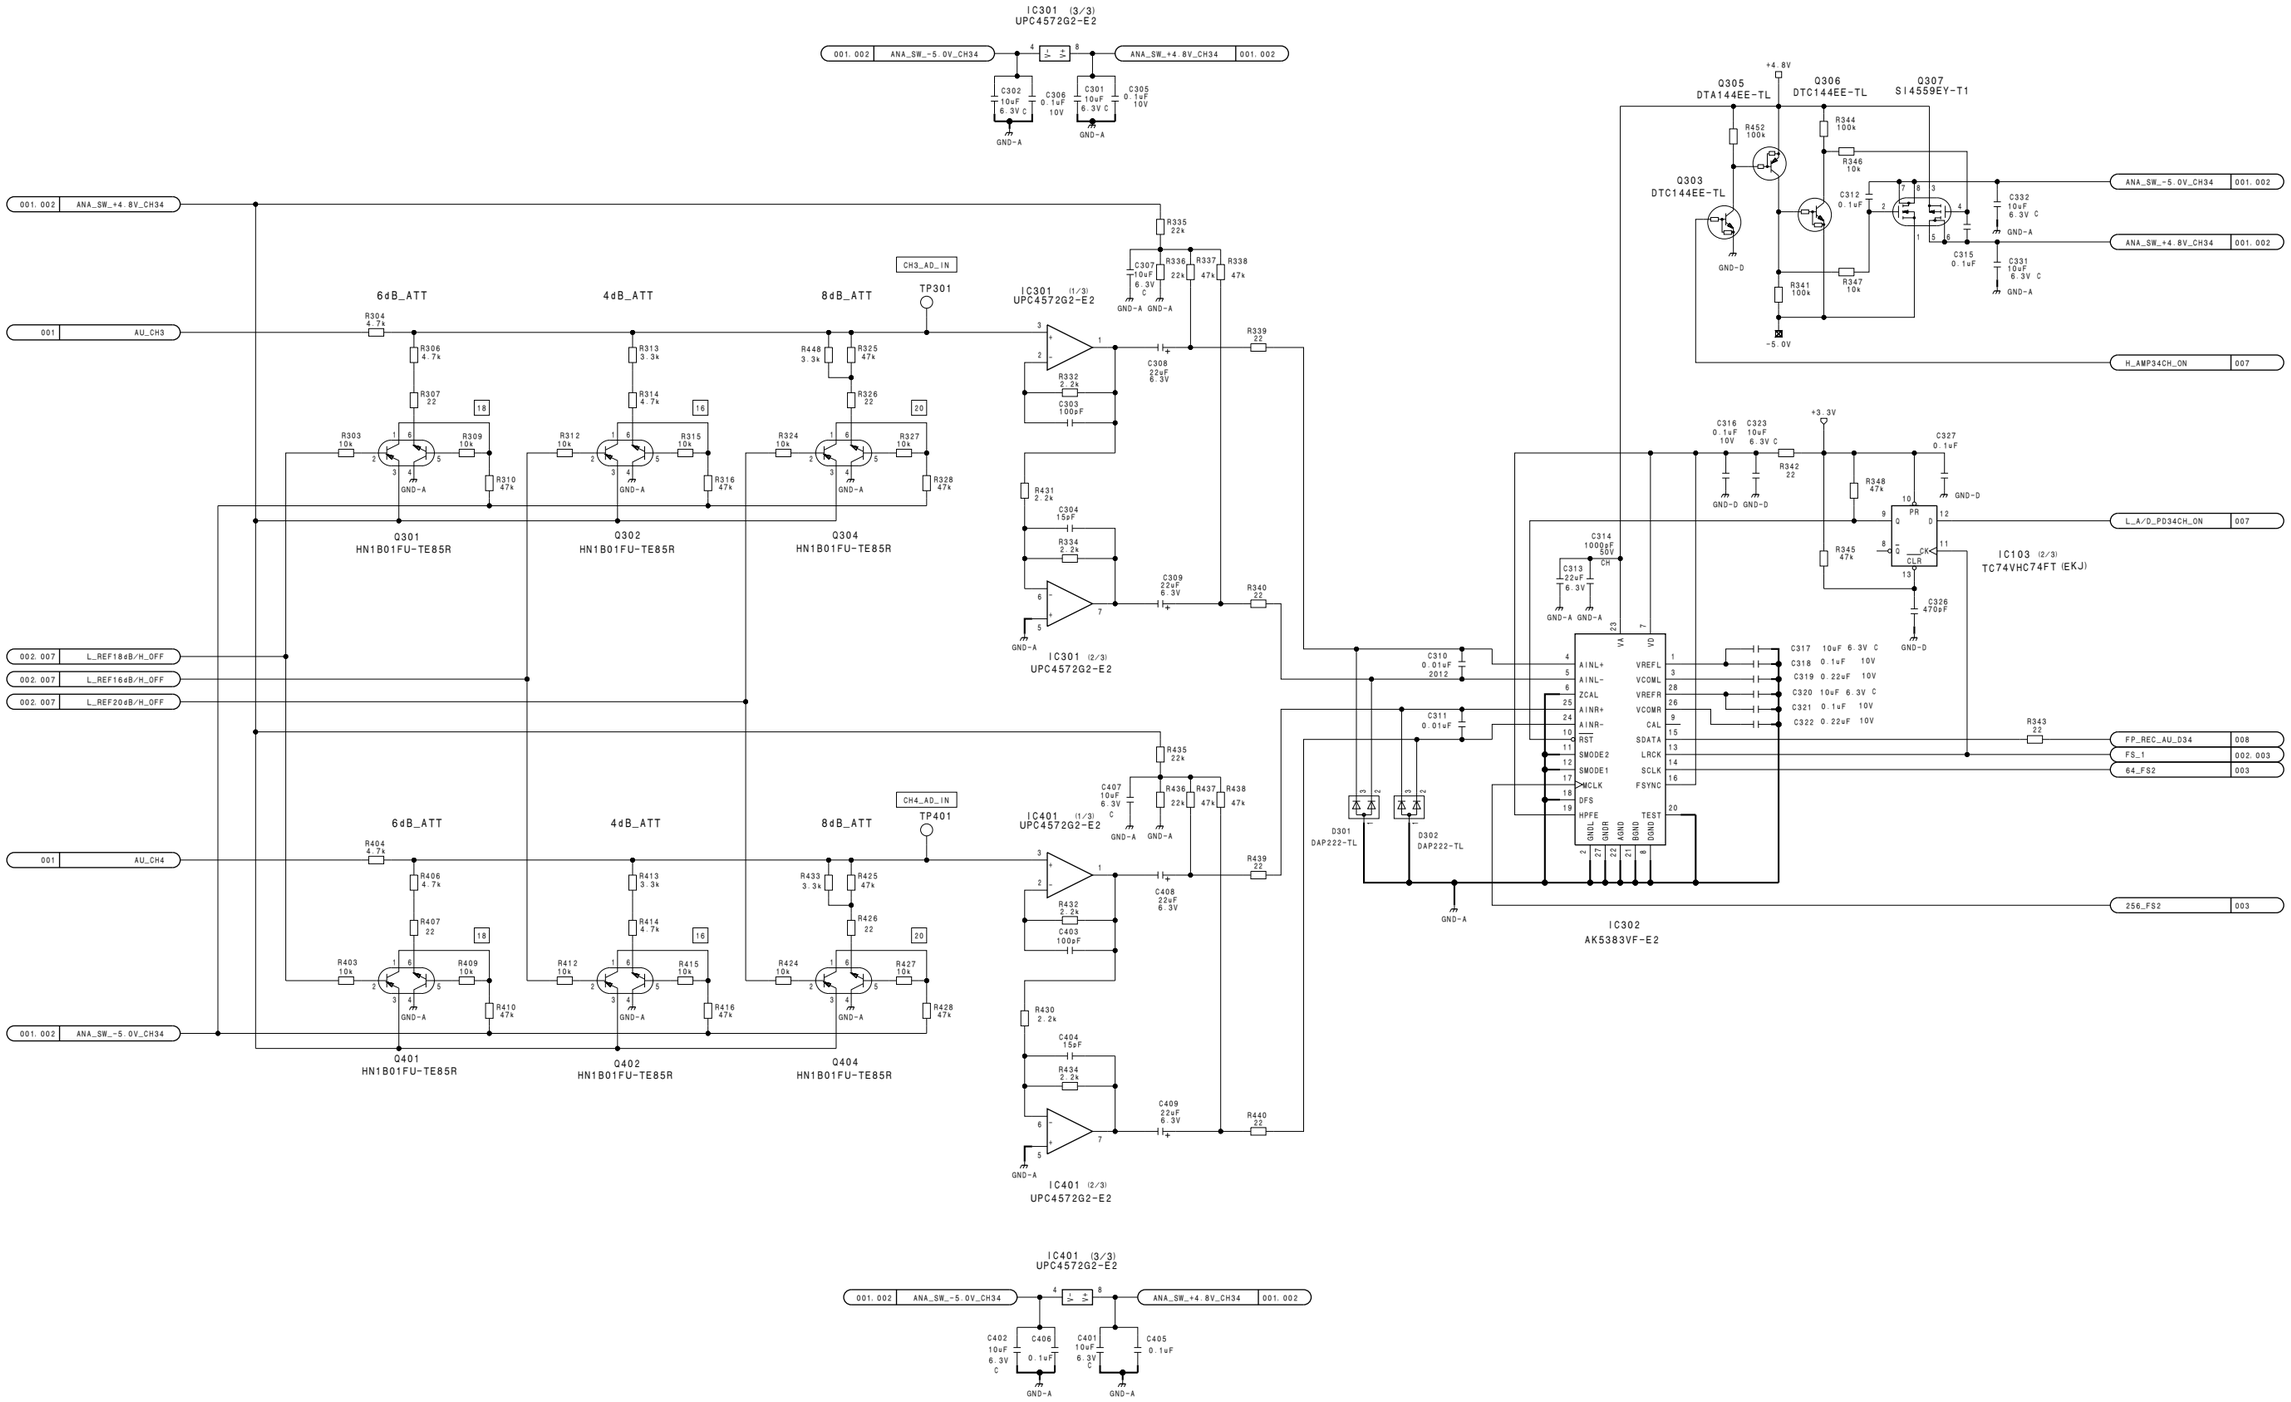



FP-157 (2/8)
BOARD NO. 1-876-846-11
VCX-434_FP-157_011_2

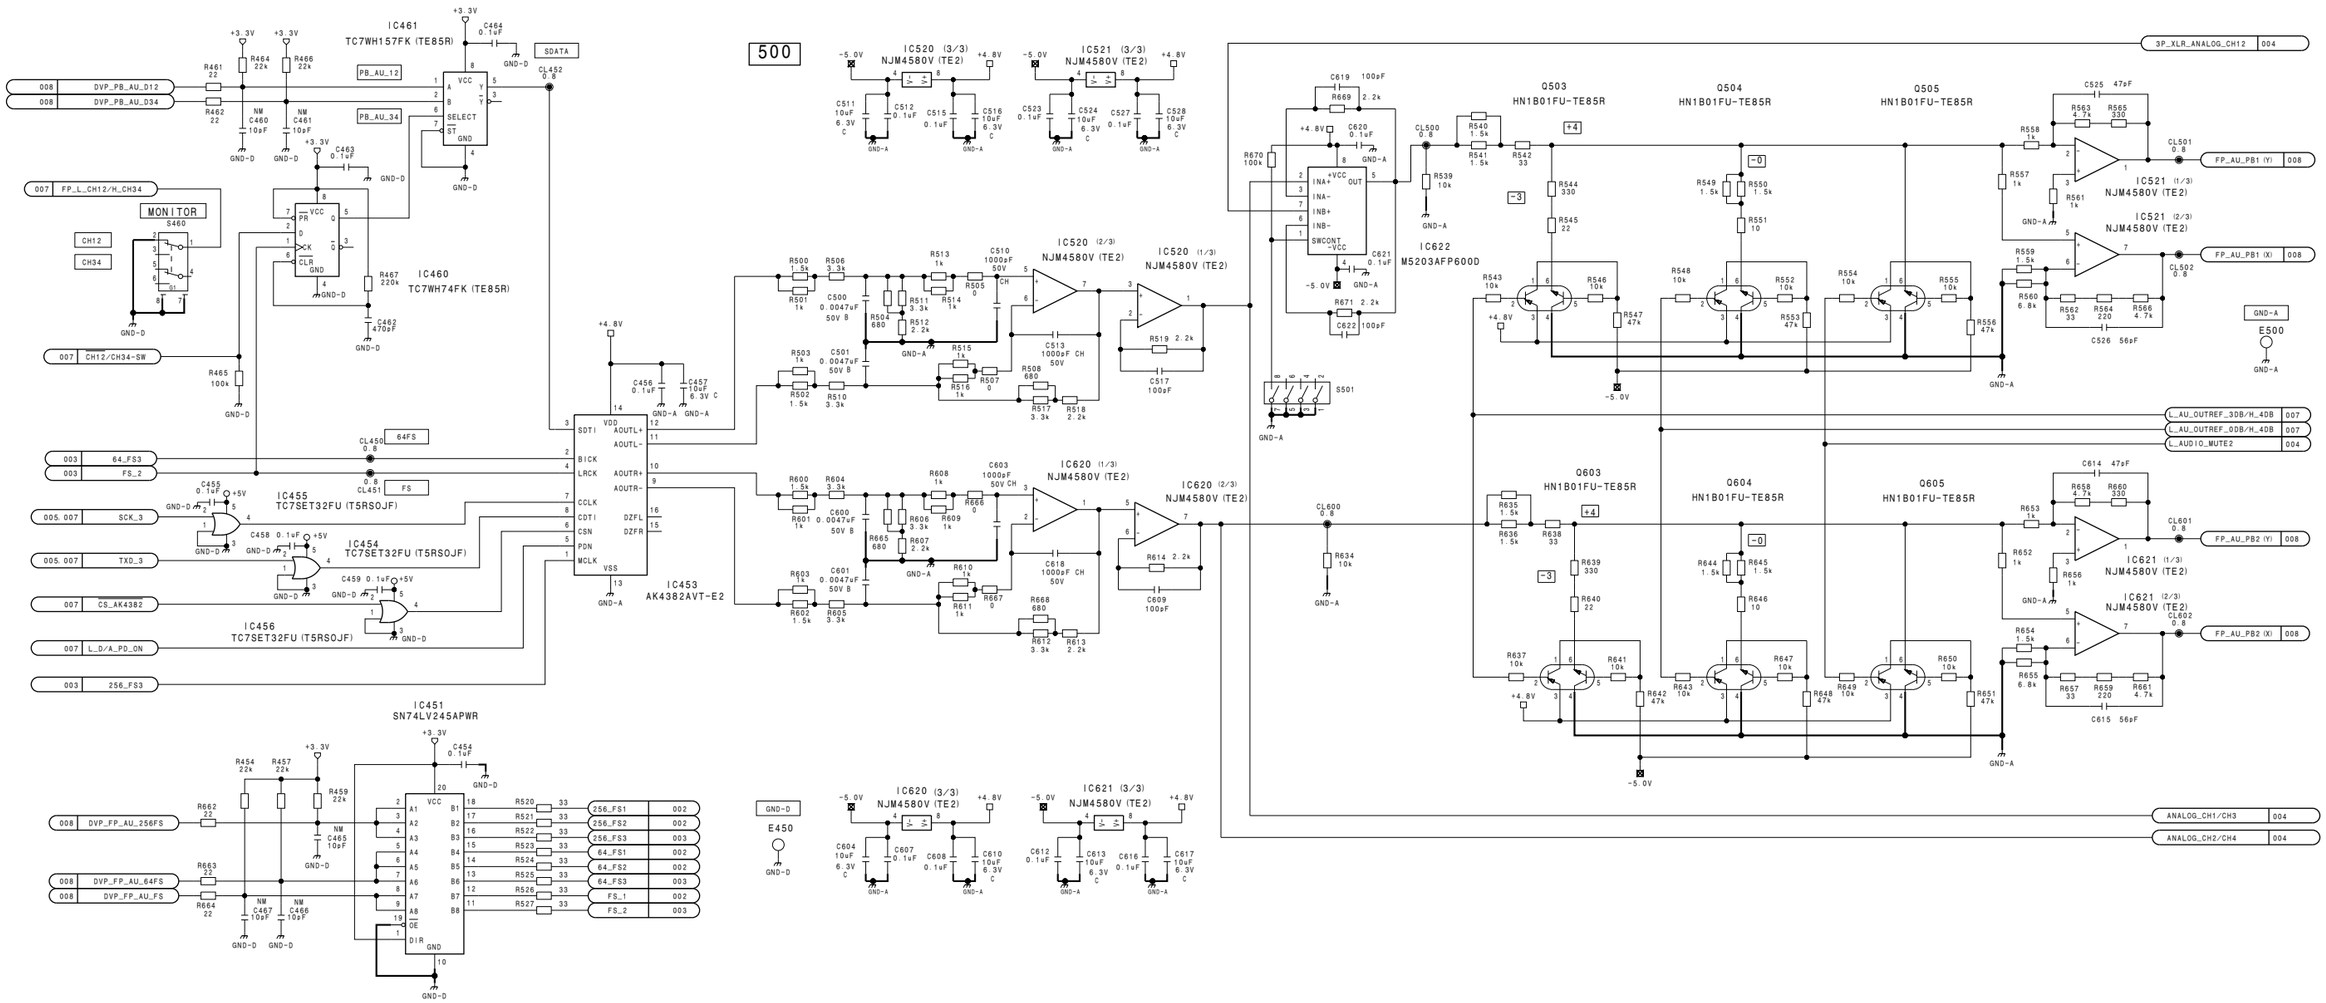
500
IC461
TC7WH157FK (TE85R)
IC460
TC7WH74FK (TE85R)
IC455
TC7SET32FU (T5RSOJF)
IC454
TC7SET32FU (T5RSOJF)
IC456
TC7SET32FU (T5RSOJF)
IC453
AK4382AVT-E2
IC451
SN74LV245APWR
IC520 (1/3) NJM4580V (TE2)
IC520 (2/3) NJM4580V (TE2)
IC520 (3/3) NJM4580V (TE2)
IC521 (1/3) NJM4580V (TE2)
IC521 (2/3) NJM4580V (TE2)
IC521 (3/3) NJM4580V (TE2)
IC620 (1/3) NJM4580V (TE2)
IC620 (2/3) NJM4580V (TE2)
IC620 (3/3) NJM4580V (TE2)
IC621 (1/3) NJM4580V (TE2)
IC621 (2/3) NJM4580V (TE2)
IC621 (3/3) NJM4580V (TE2)
IC622
M5203AFP600D
Q503 HN1B01FU-TE85R
Q504 HN1B01FU-TE85R
Q505 HN1B01FU-TE85R
Q603 HN1B01FU-TE85R
Q604 HN1B01FU-TE85R
Q605 HN1B01FU-TE85R
MONITOR
S460
S501
E500
E450
DVP_PB_AU_D12
DVP_PB_AU_D34
PB_AU_12
PB_AU_34
SDATA
FP_L_CH12/H_CH34
CH12
CH34
CH12/CH34-SW
64FS
FS
SCK_3
TXD_3
CS_AK4382
L_D/A_PD_ON
256_FS3
DVP_FP_AU_256FS
DVP_FP_AU_64FS
DVP_FP_AU_FS
256_FS1
256_FS2
256_FS3
64_FS1
64_FS2
64_FS3
FS_1
FS_2
3P_XLR_ANALOG_CH12
FP_AU_PB1 (Y)
FP_AU_PB1 (X)
FP_AU_PB2 (Y)
FP_AU_PB2 (X)
L_AU_OUTREF_3DB/H_4DB
L_AU_OUTREF_0DB/H_4DB
L_AUDIO_MUTE2
ANALOG_CH1/CH3
ANALOG_CH2/CH4
GND-A
GND-D
+3.3V
+4.8V
-5.0V

FP-157 (4/8)
SUFFIX: -11

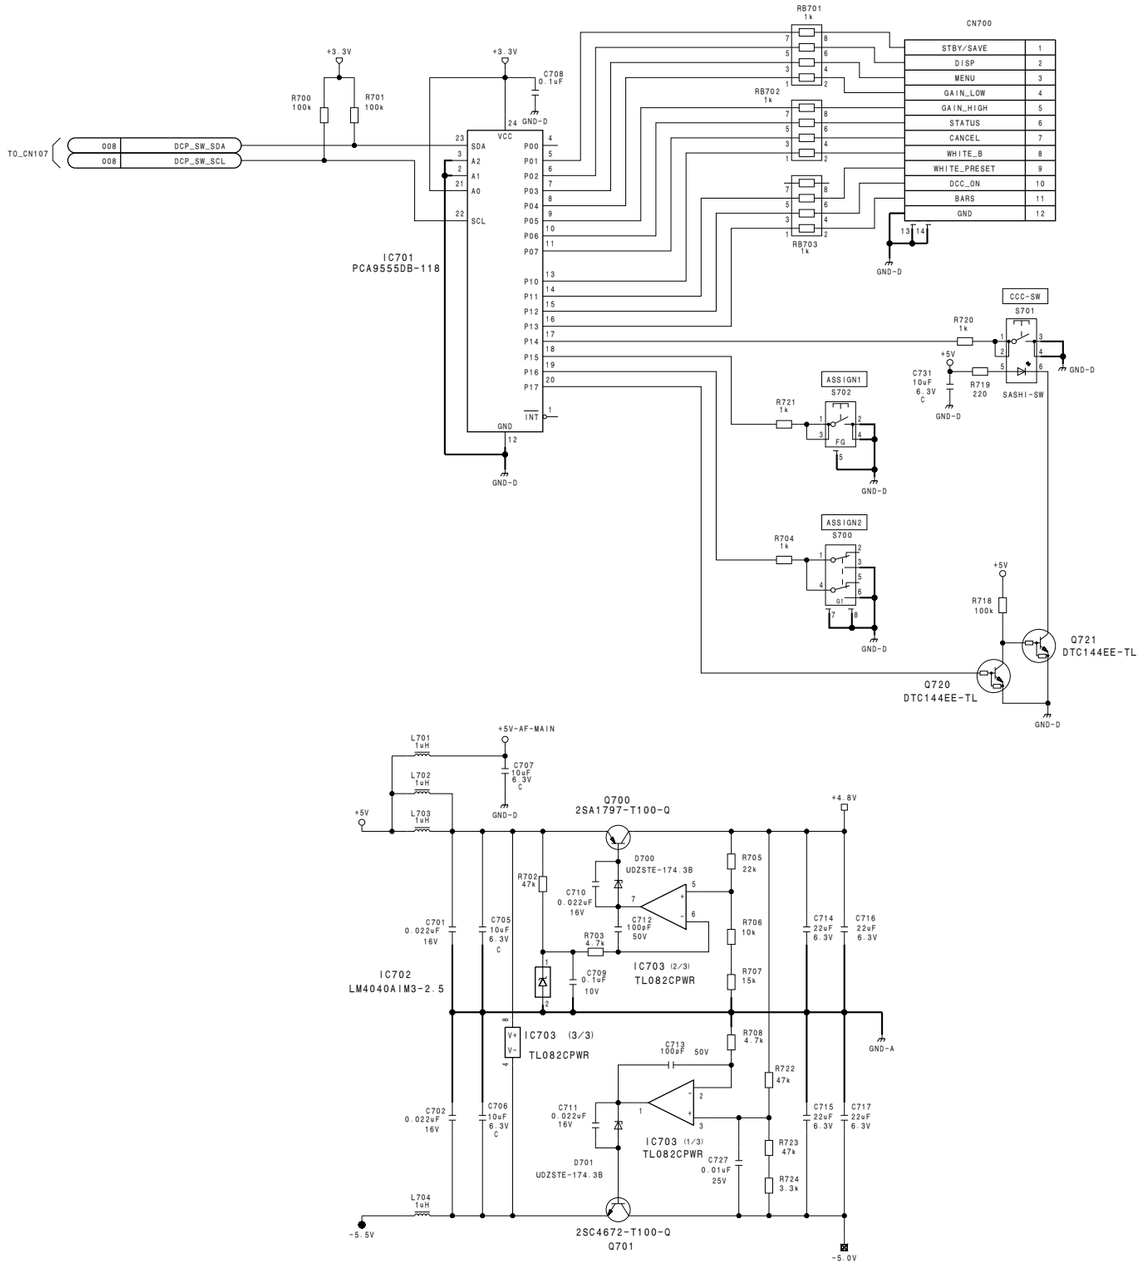


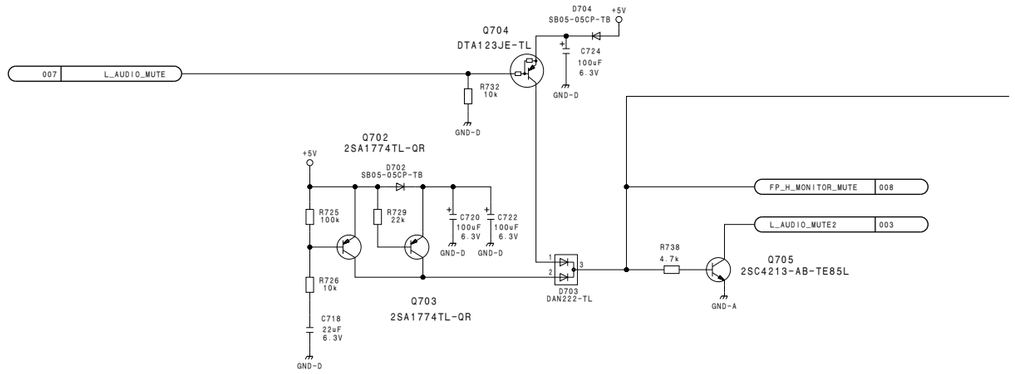

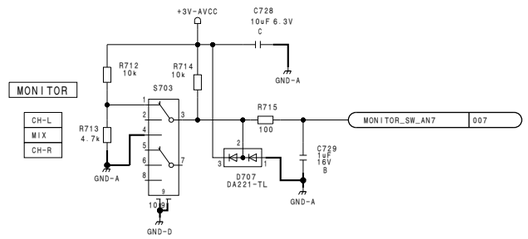


FP-157 (4/8)
SUFFIX: -11

FP-157 (4/8)
SUFFIX: -11

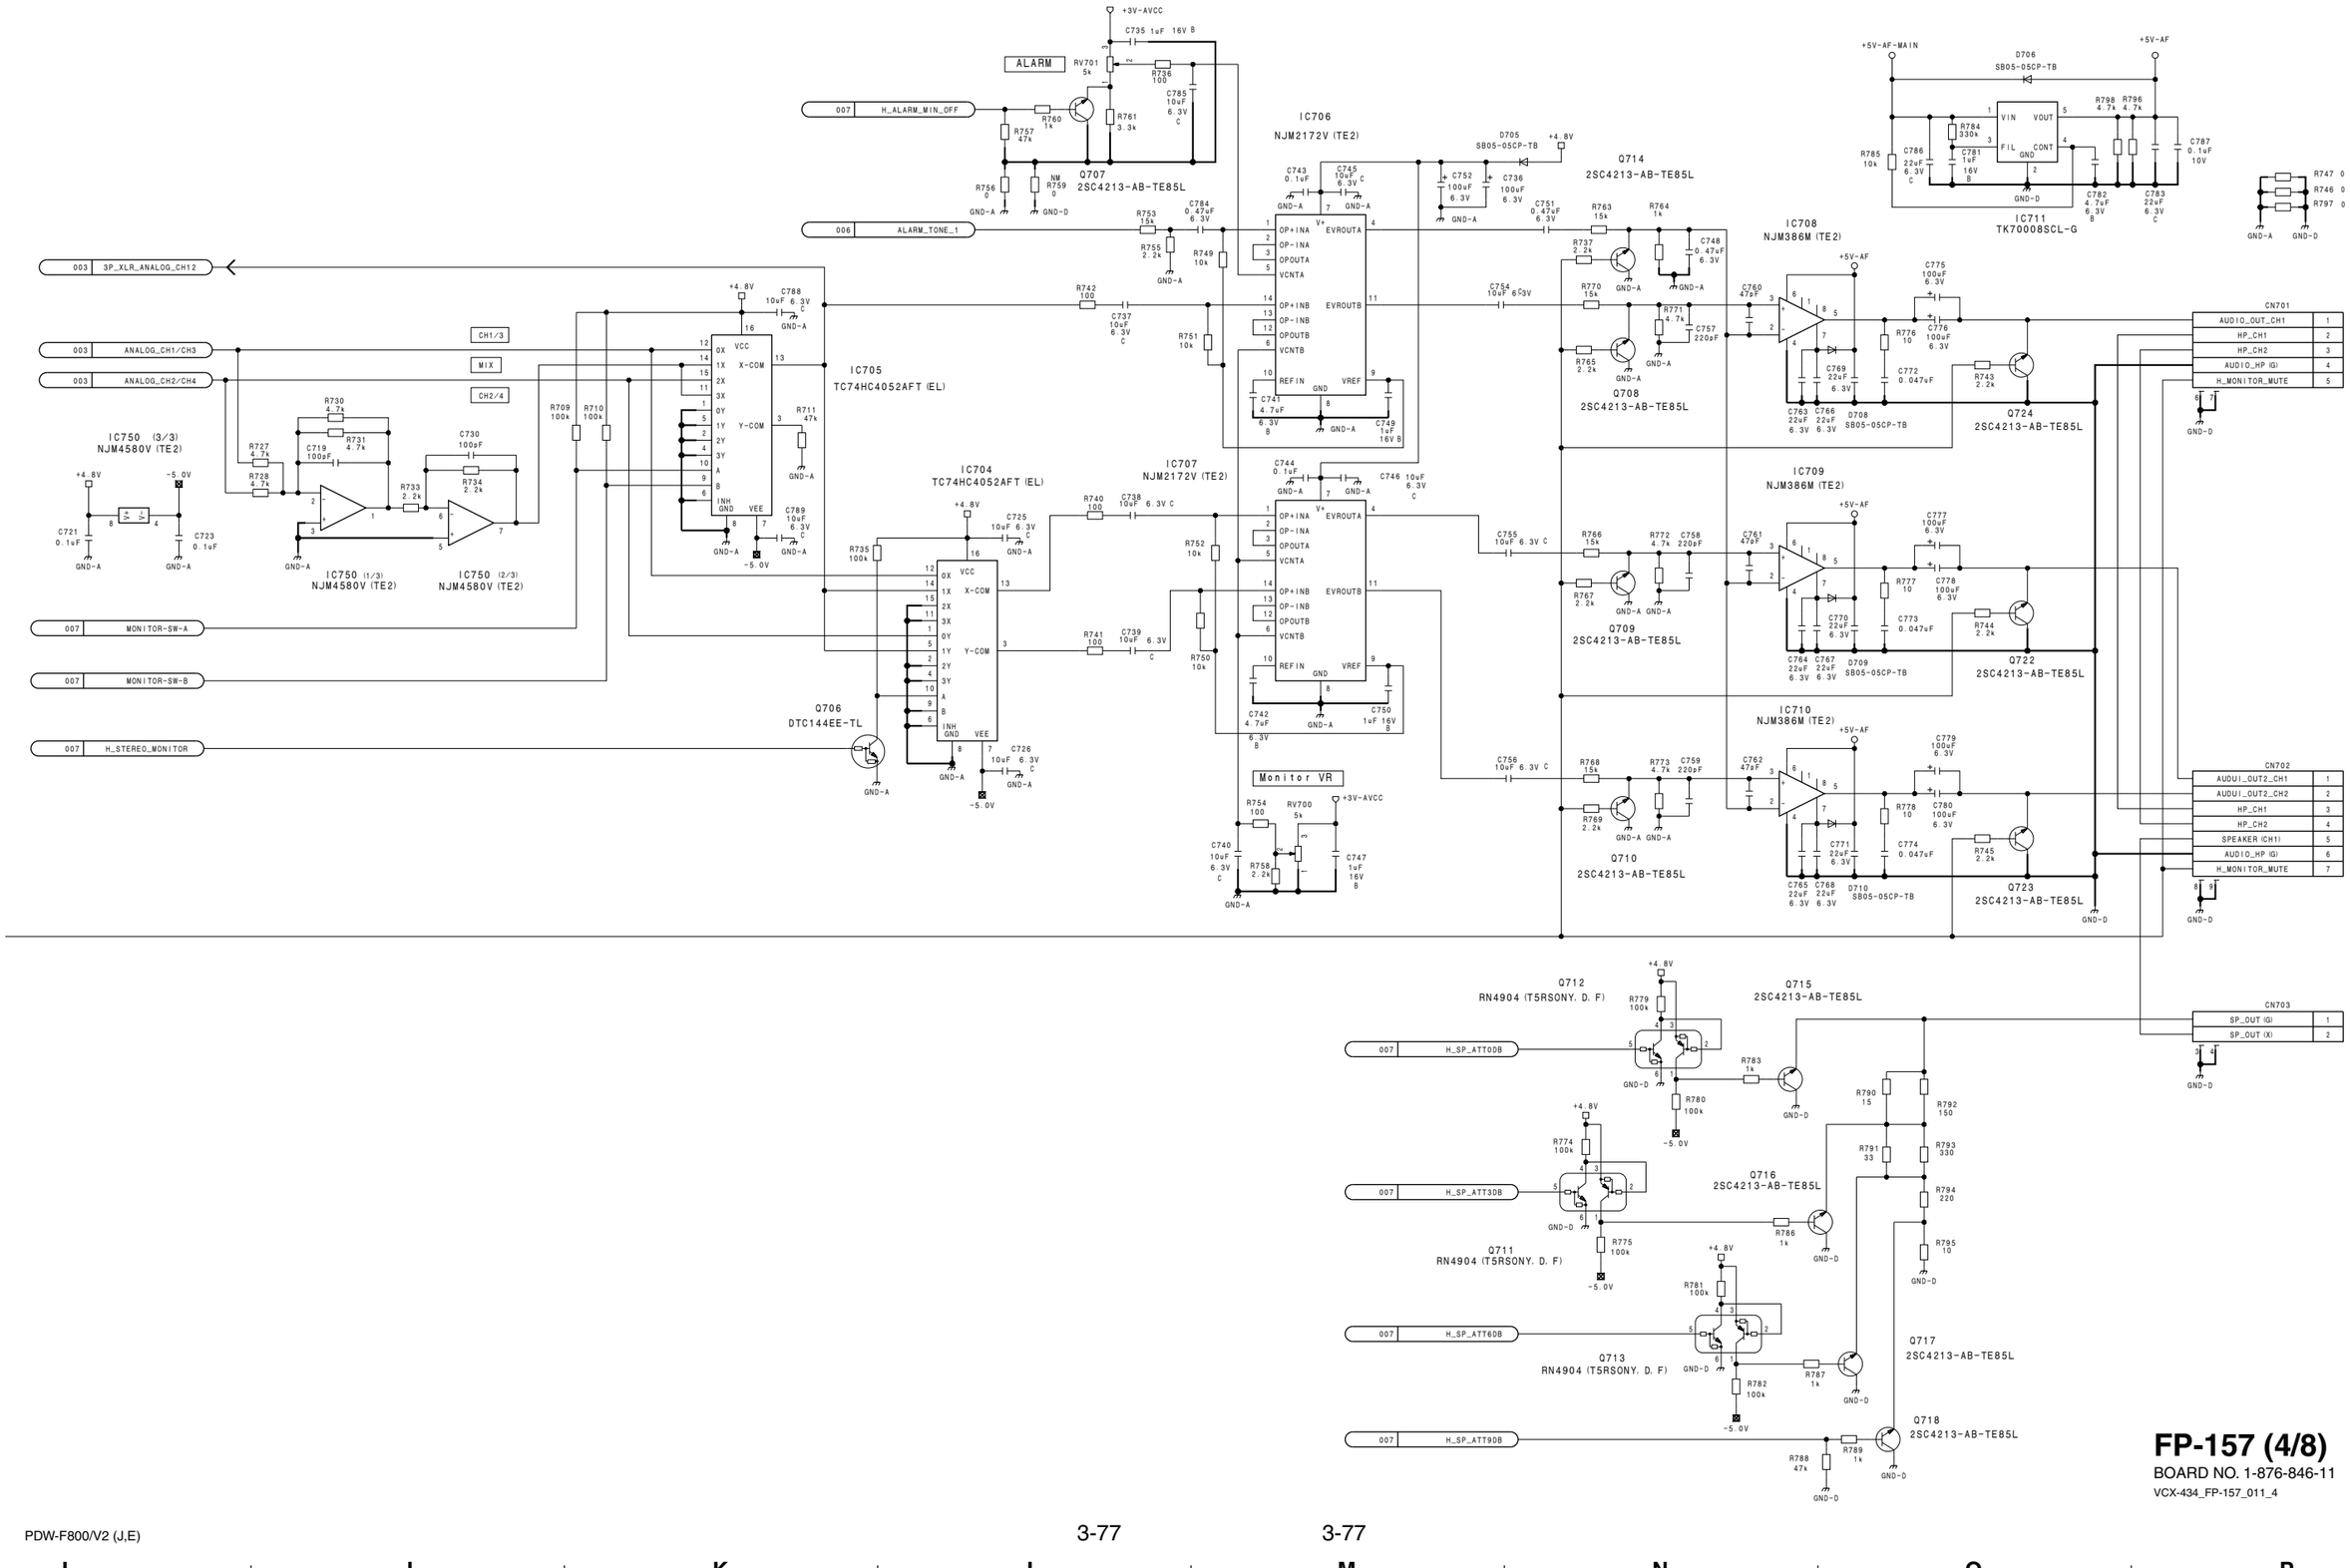

FP-157 (4/8)
BOARD NO. 1-876-846-11
VCX-434_FP-157_011_4


FP-157 (5/8)
SUFFIX: -11

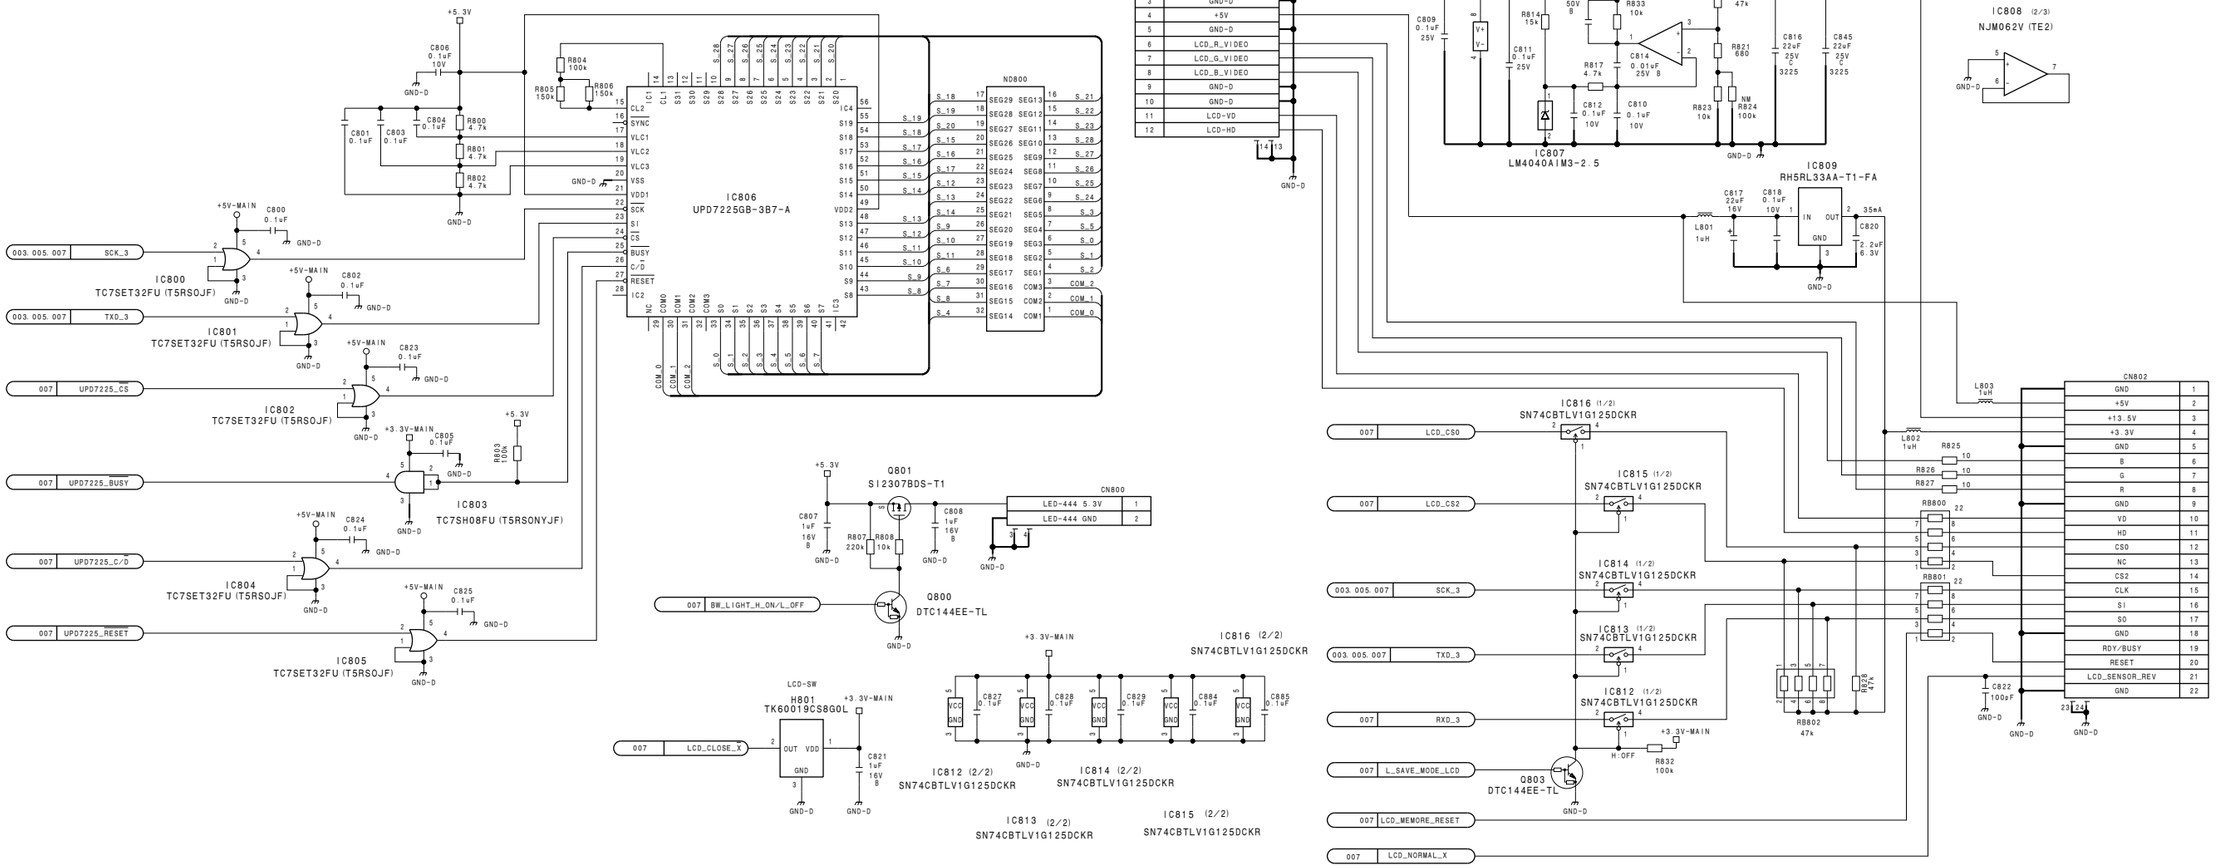

3-78


FP-157 (5/8)
BOARD NO. 1-876-846-11
VCX-434_FP-157_011_5


PDW-F800/V2 (J,E)

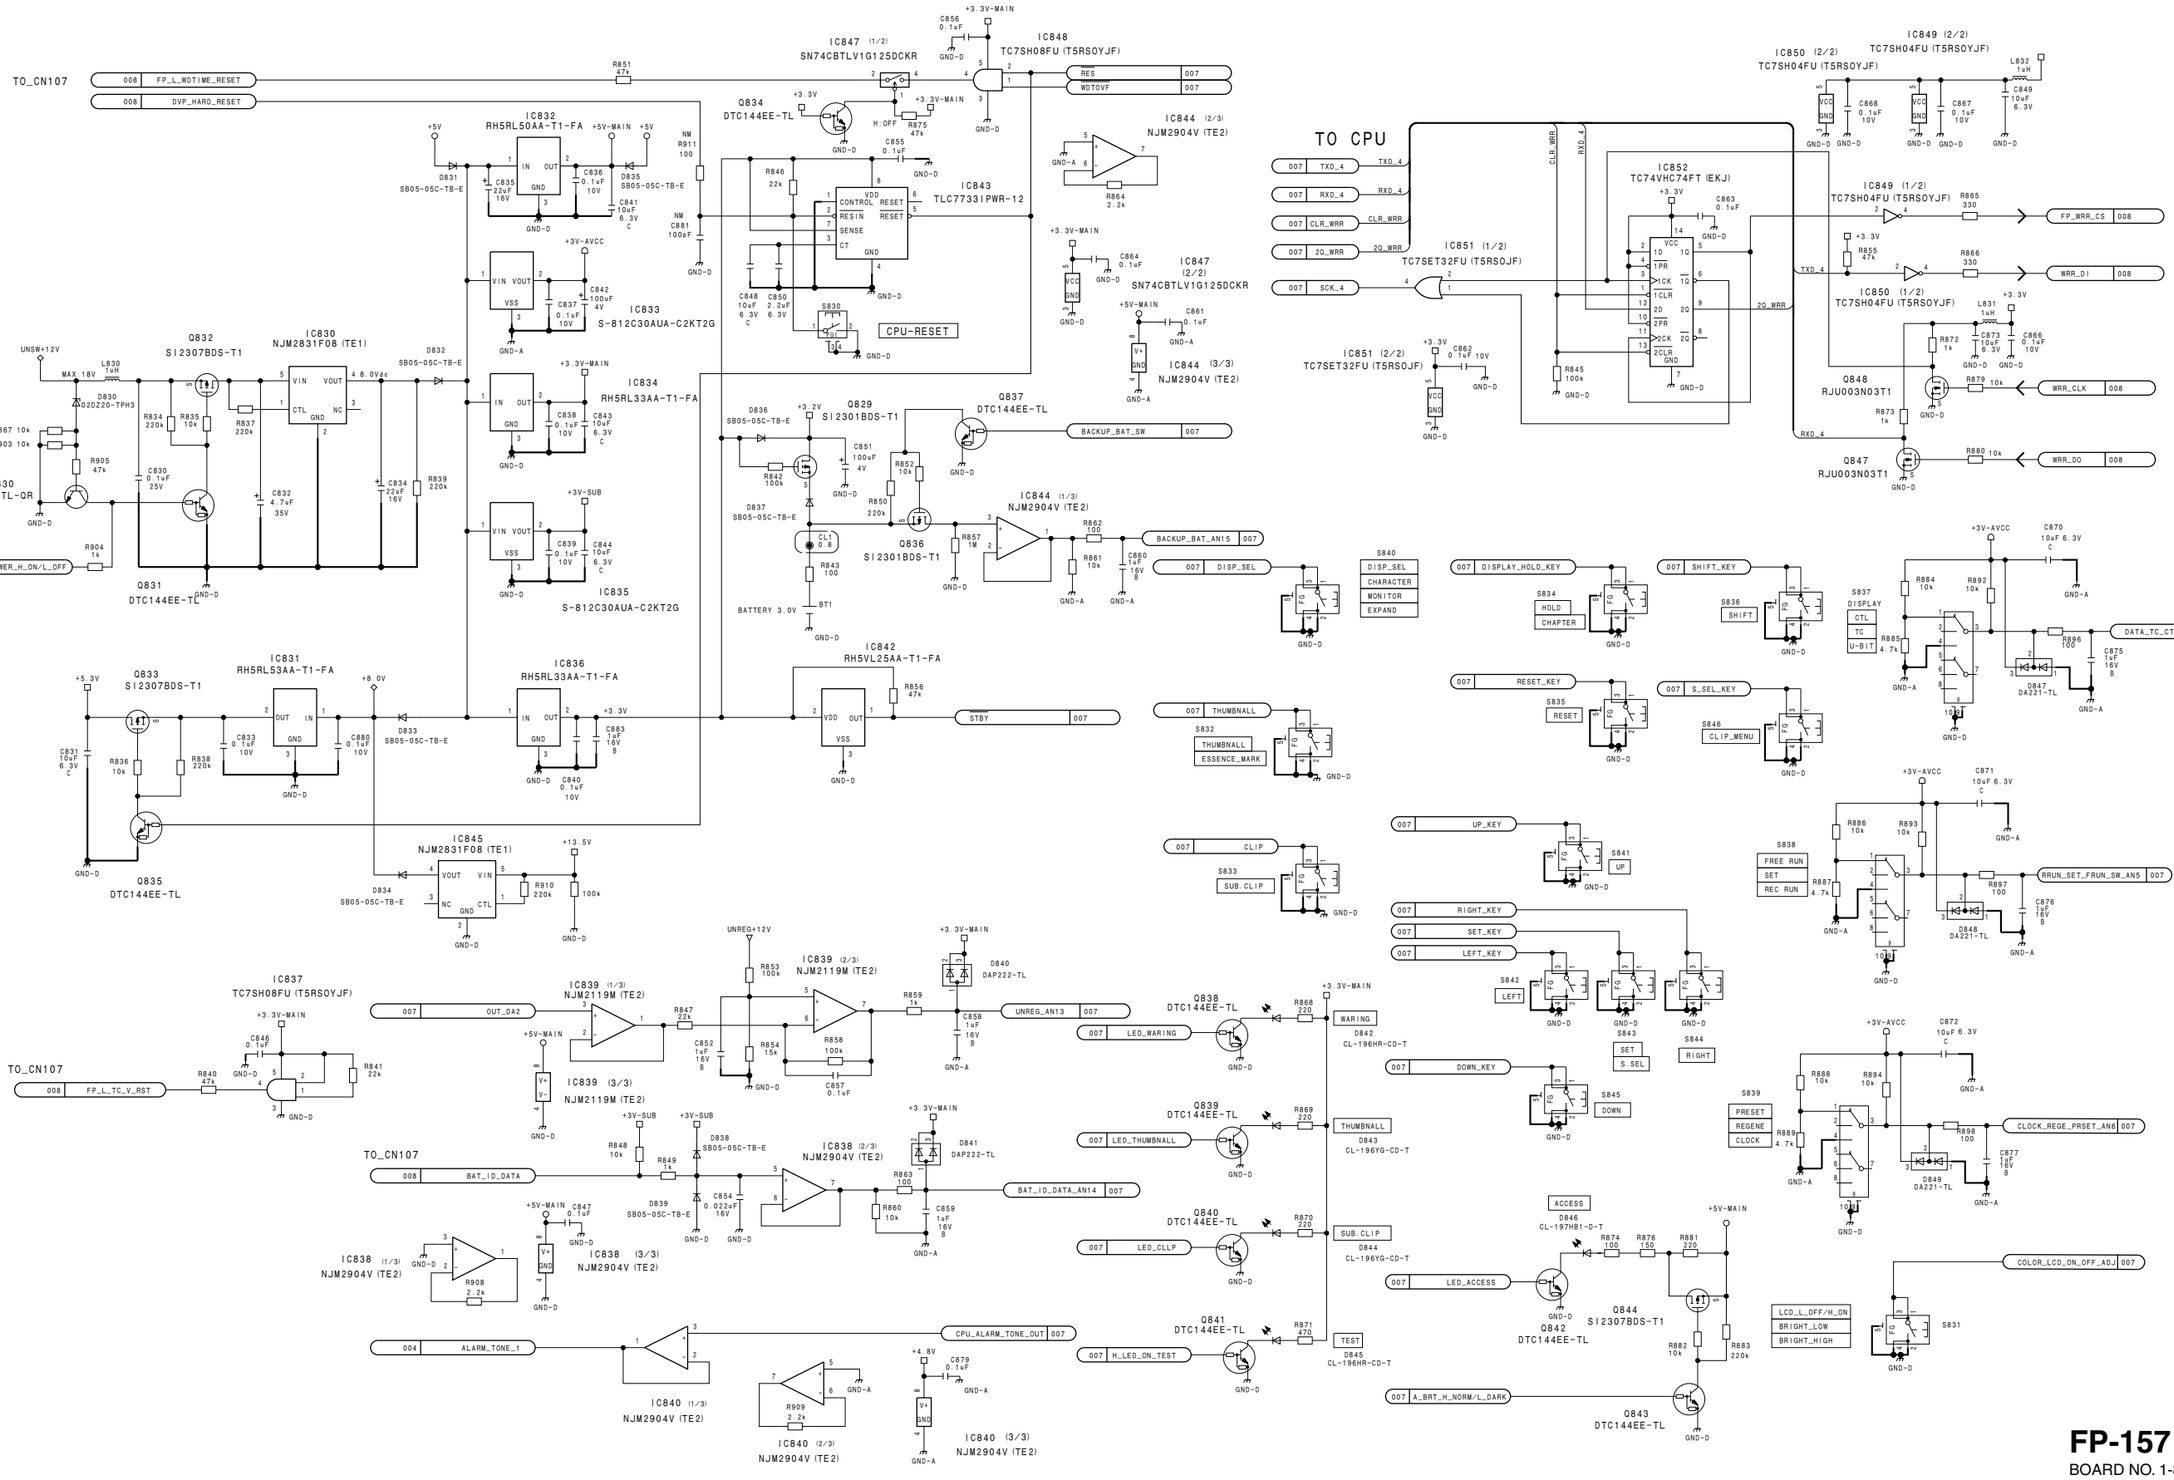

FP-157 (6/8)
BOARD NO. 1-876-846-11
VCX-434_FP-157_011_6


FP-157 (7/8)
SUFFIX: -11

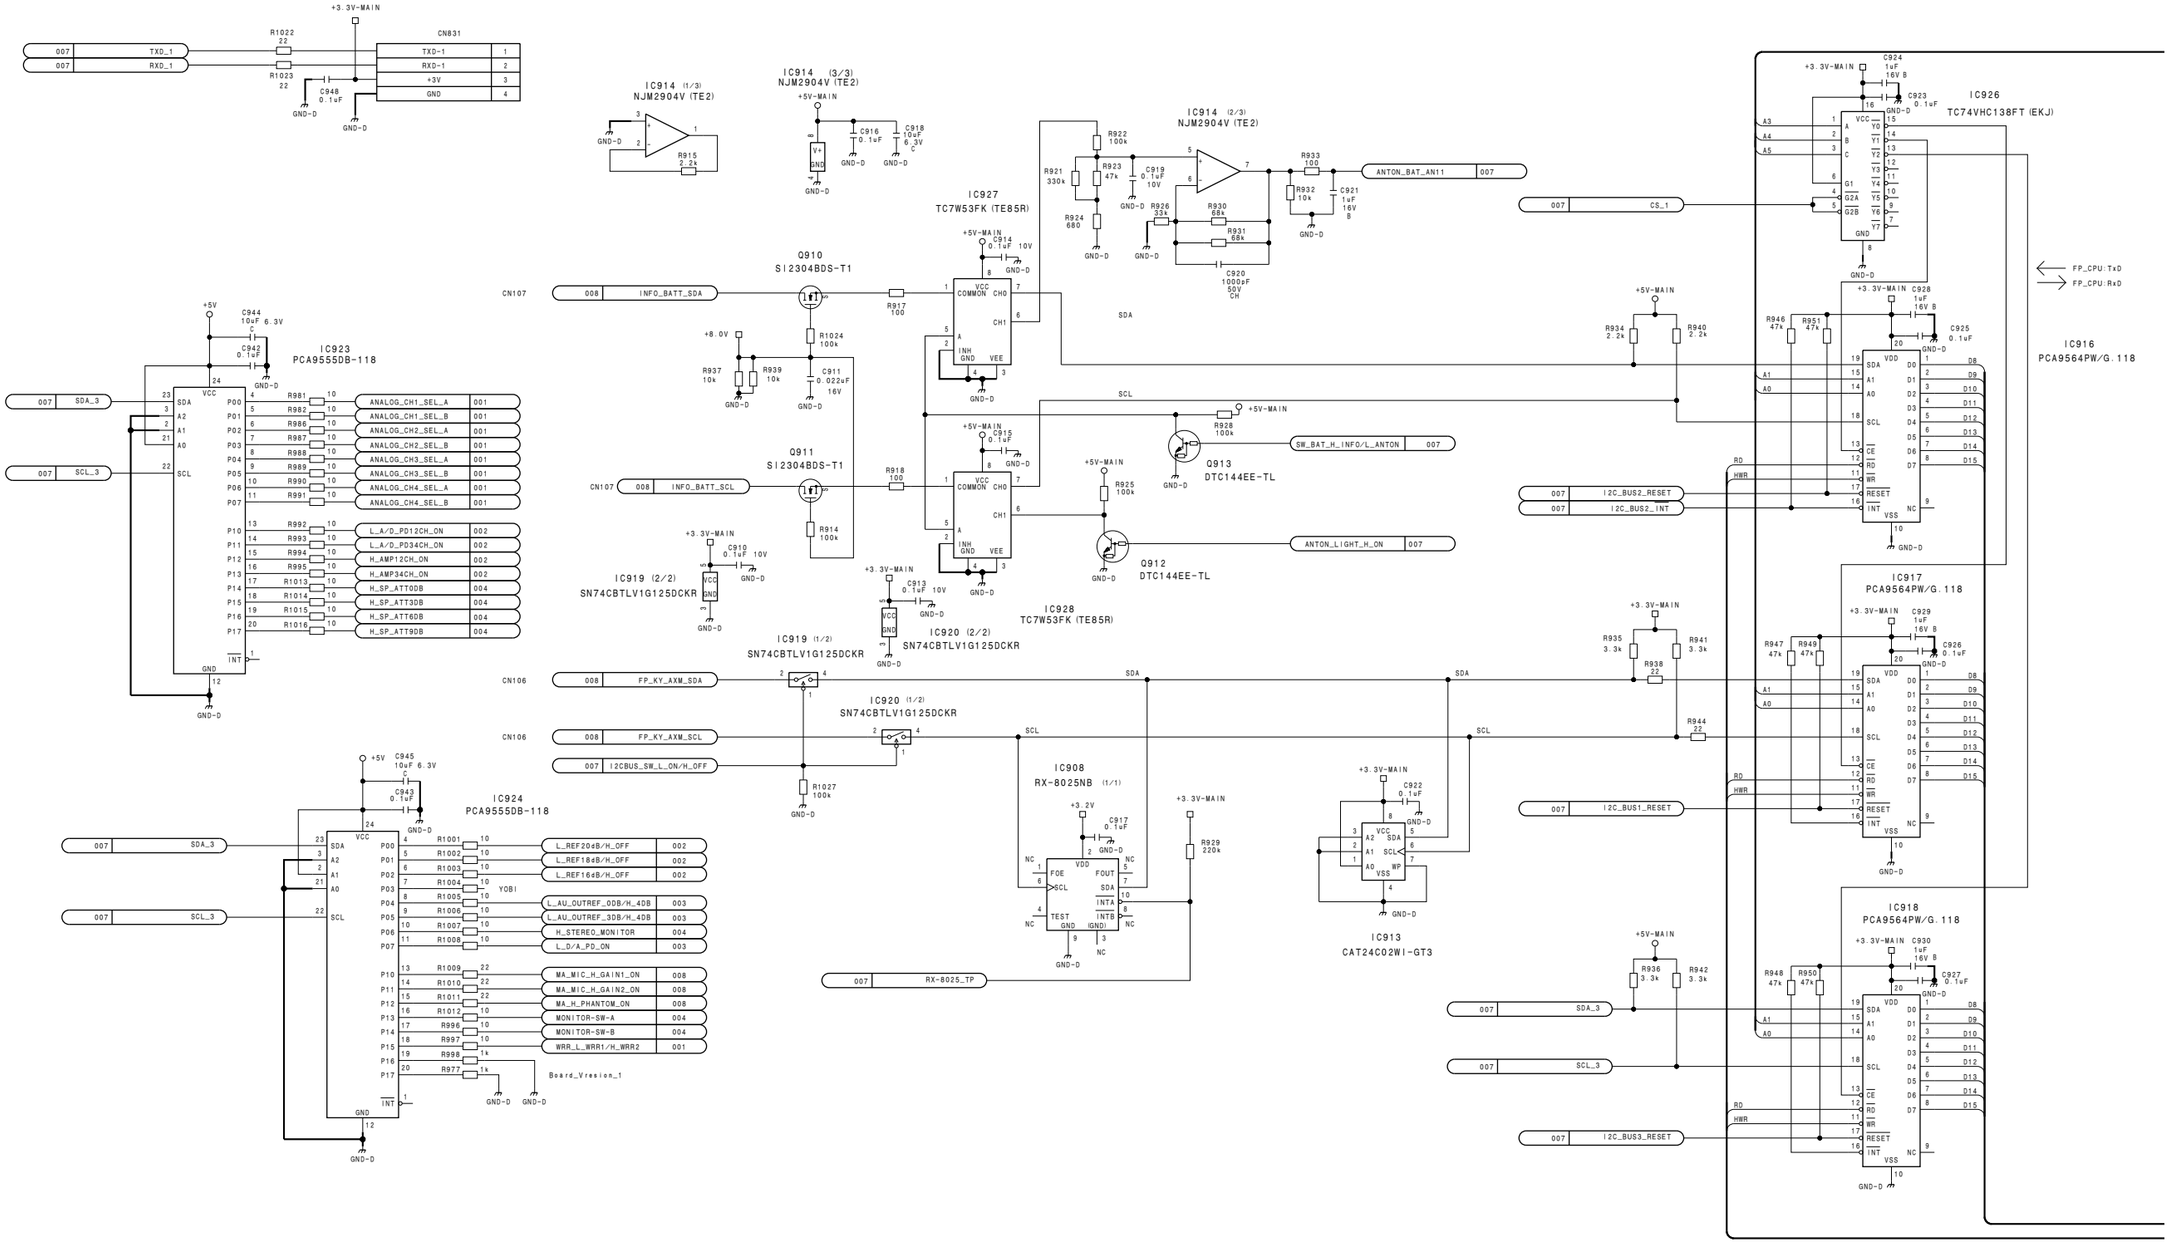

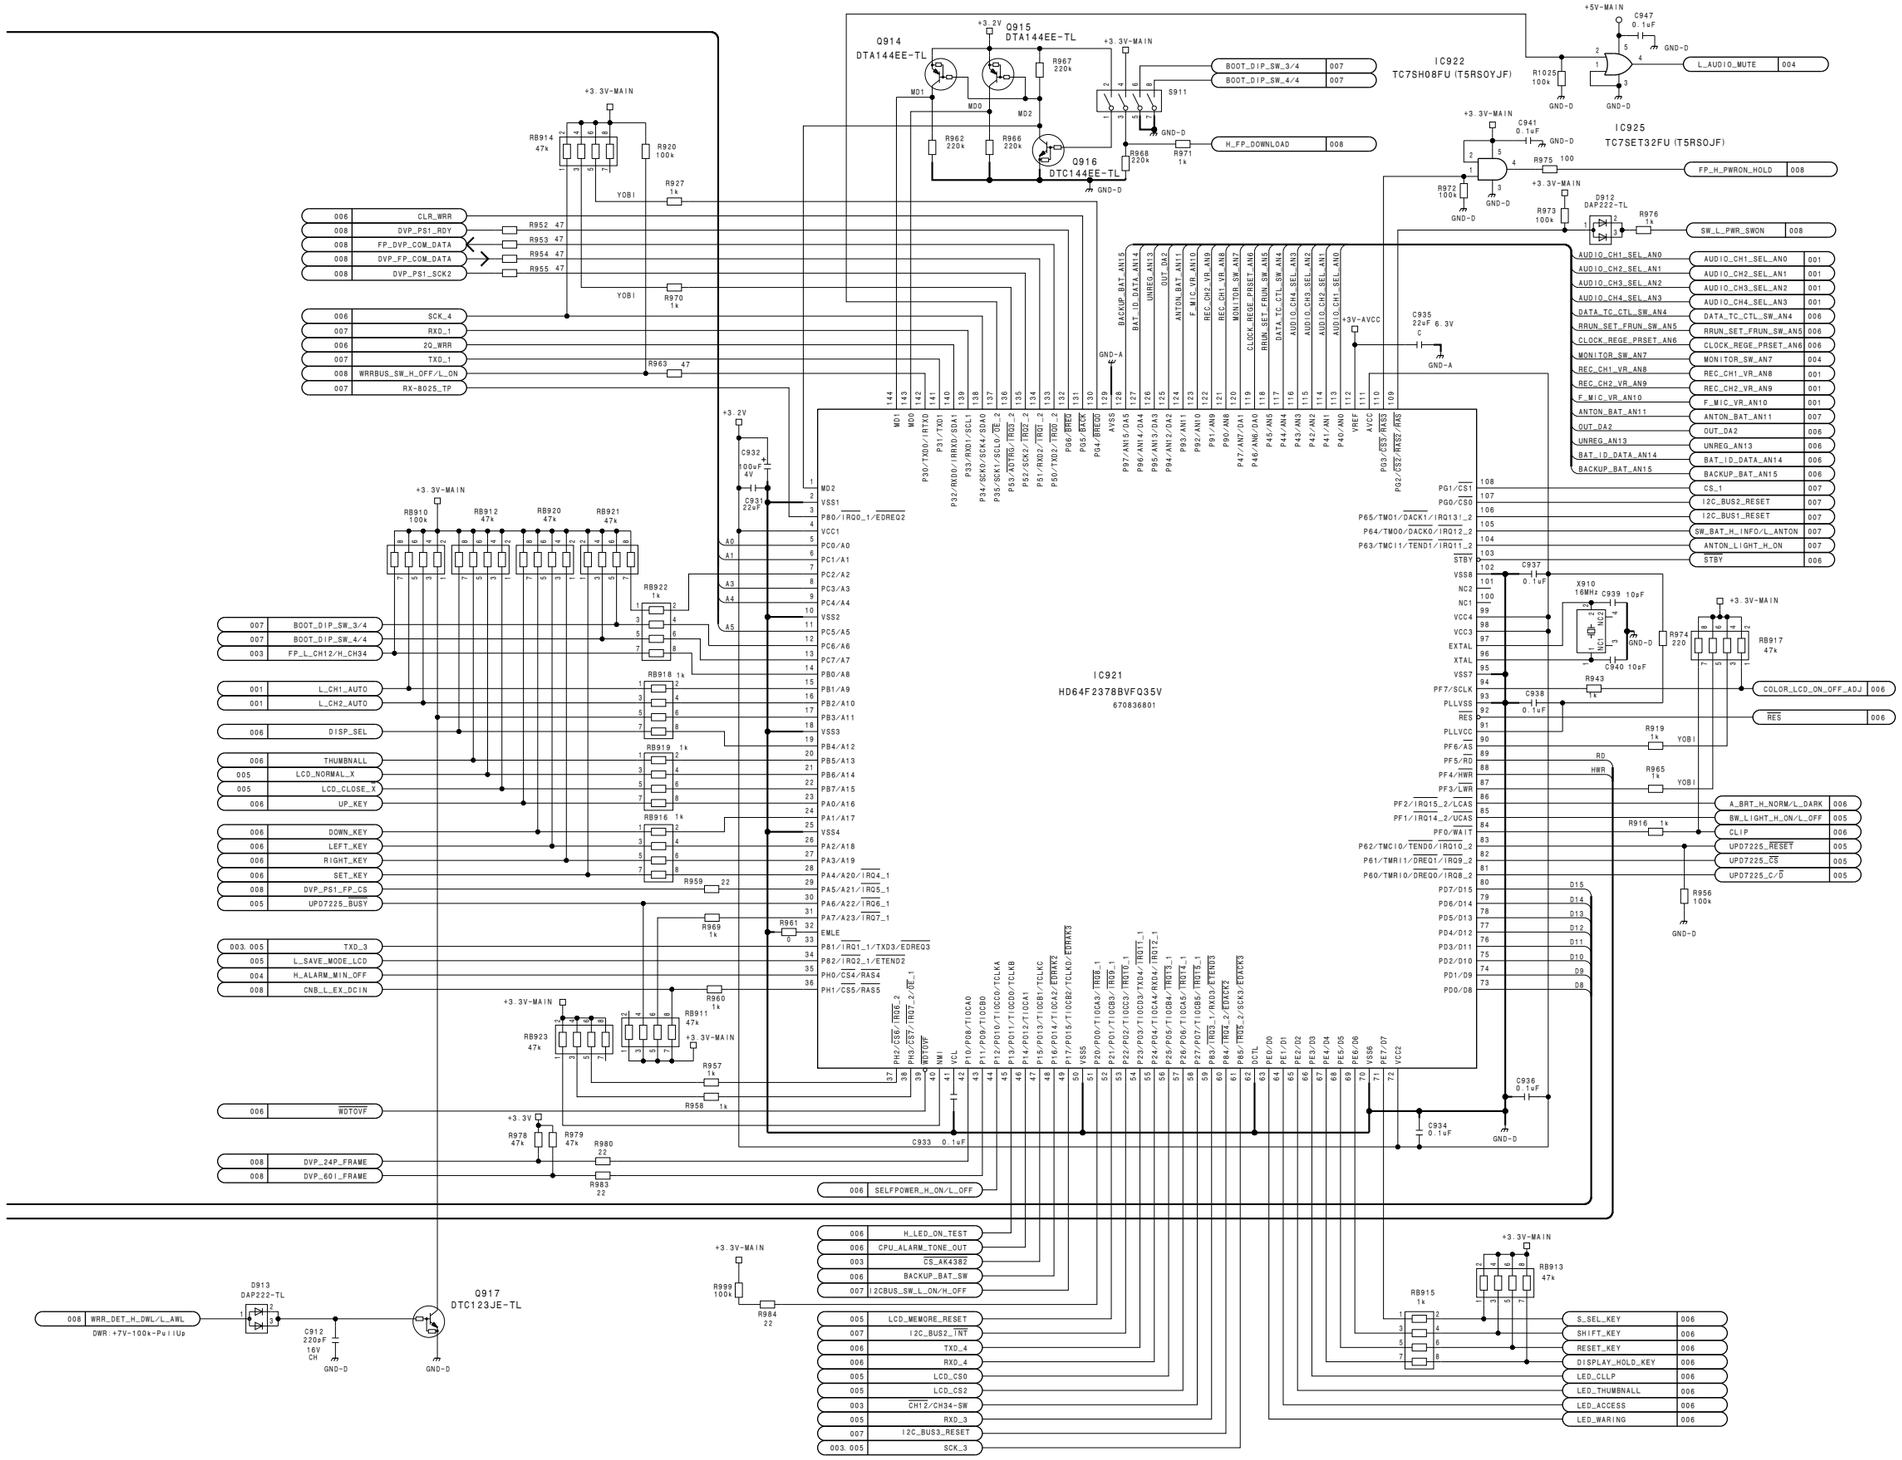



FP-157 (7/8)
BOARD NO. 1-876-846-11
VCX-434_FP-157_011_7

FP-157 (8/8)
SUFFIX: -11

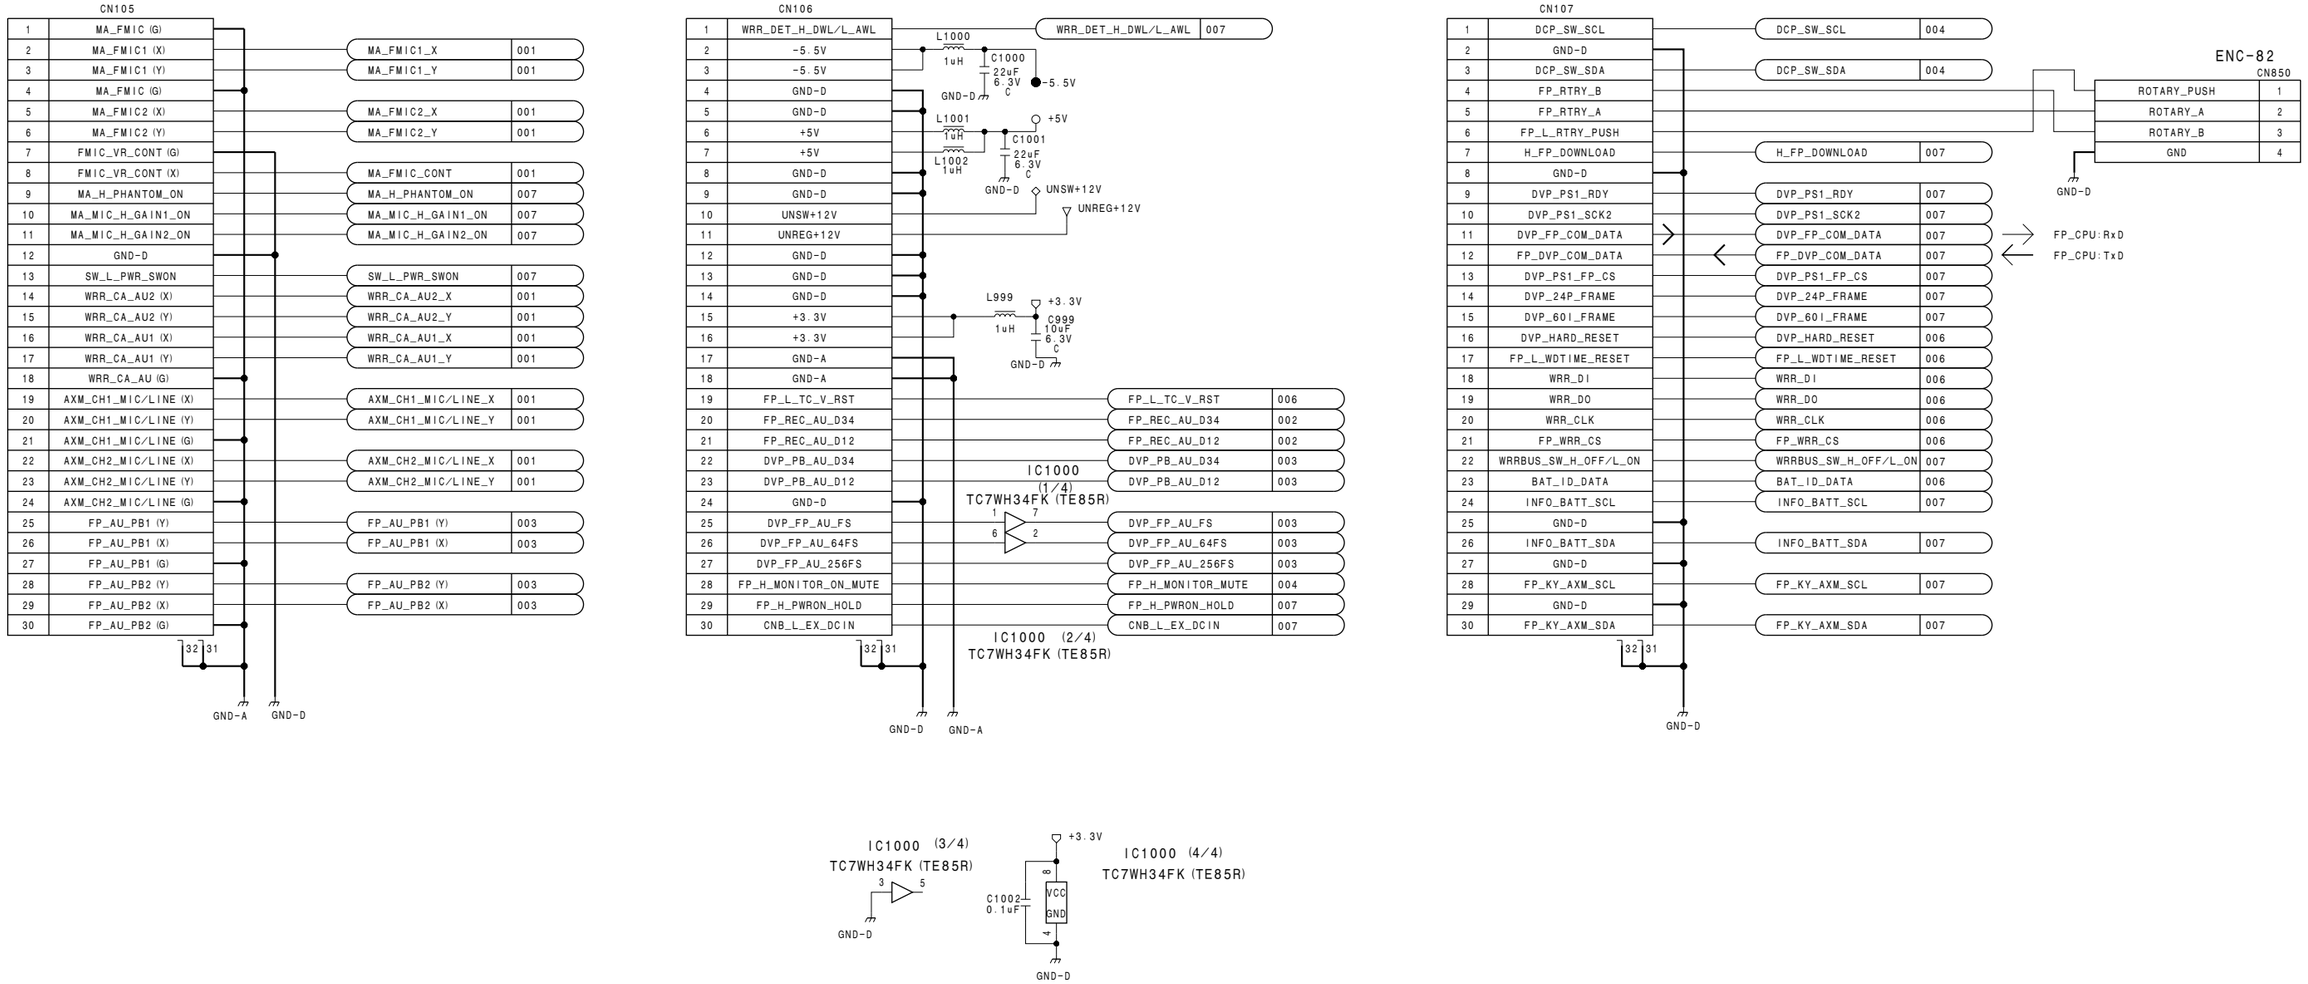


HP-148, HP-149
SUFFIX: -11 SUFFIX: -11

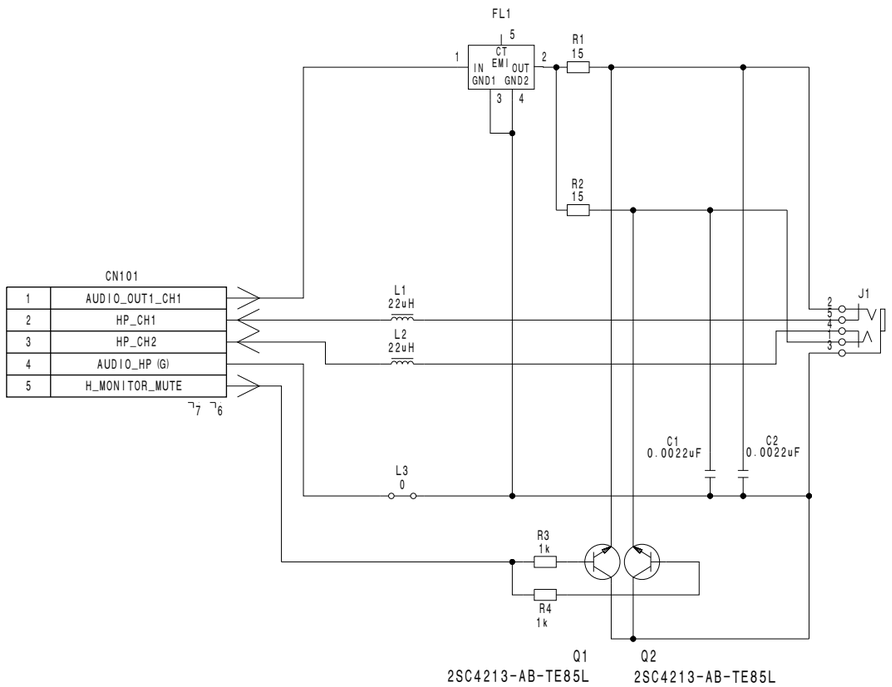


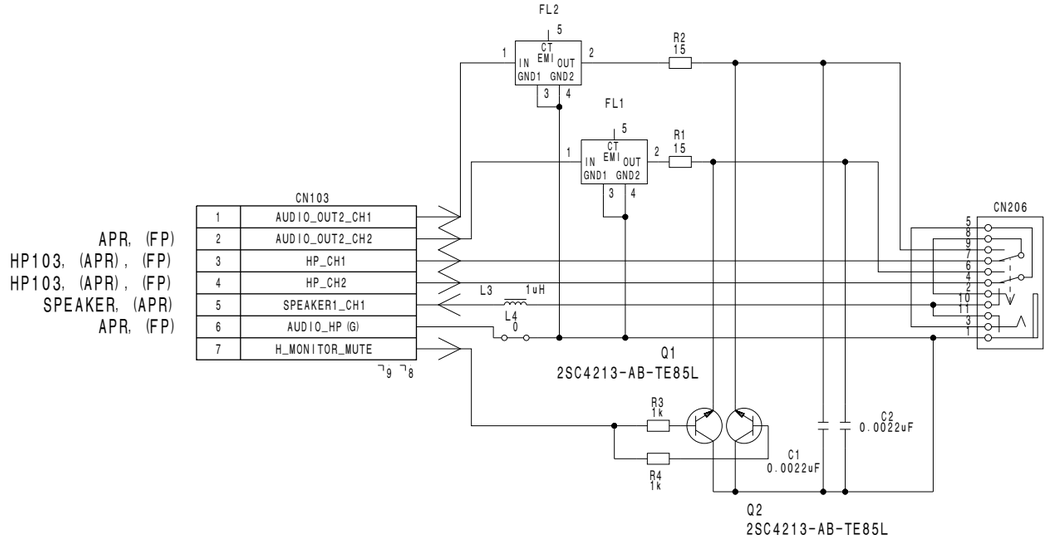


HP-148
BOARD NO. 1-877-343-11
VCX-434_HP-148_011_1

HP-149
BOARD NO. 1-877-344-11
VCX-434_HP-149_011_1

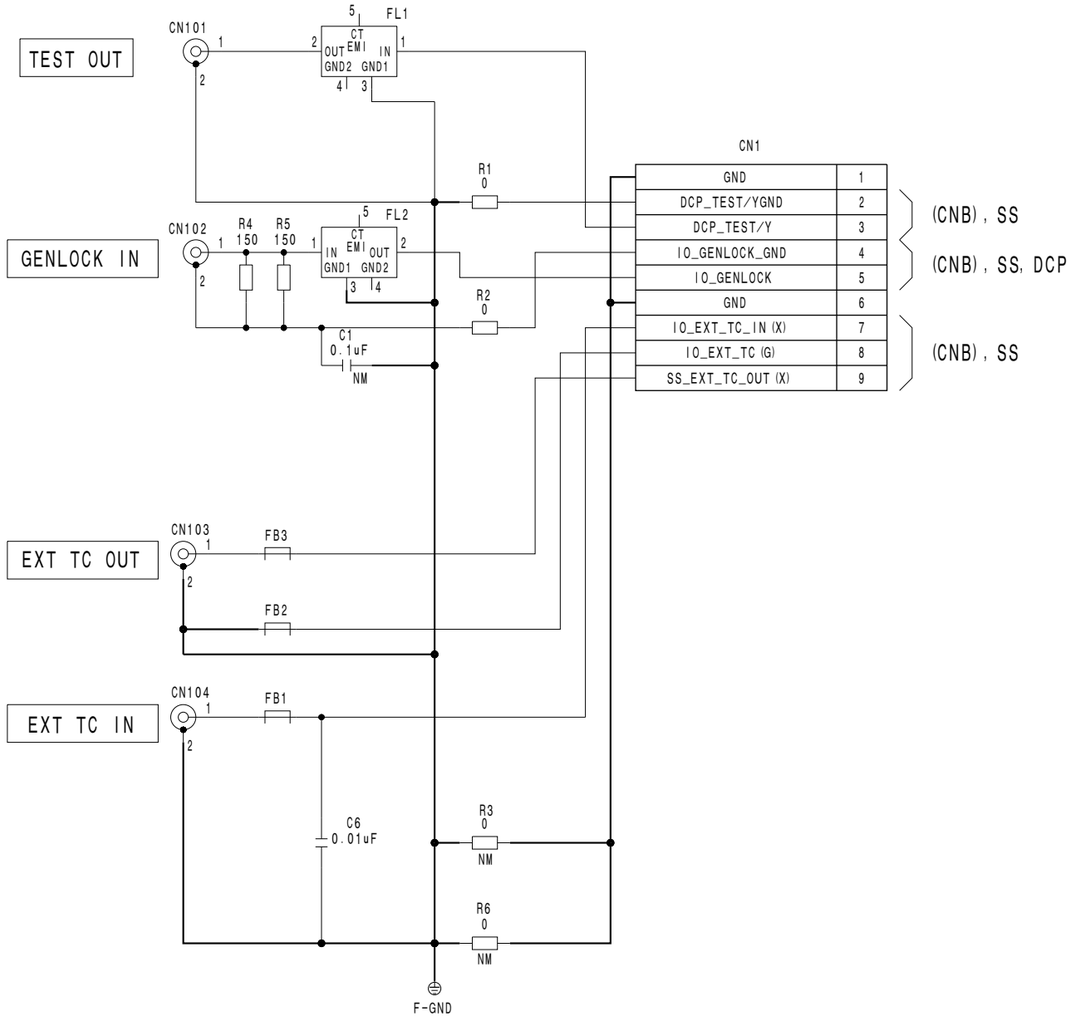
TEST OUT
GENLOCK IN
EXT TC OUT
EXT TC IN
CN101
CN102
CN103
CN104
FL1
FL2
FB1
FB2
FB3
R1 0
R2 0
R3 0 NM
R6 0 NM
R4 150
R5 150
C1 0.1uF NM
C6 0.01uF
F-GND
CN1
GND 1
DCP_TEST/YGND 2
DCP_TEST/Y 3
IO_GENLOCK_GND 4
IO_GENLOCK 5
GND 6
IO_EXT_TC_IN (X) 7
IO_EXT_TC (G) 8
SS_EXT_TC_OUT (X) 9
(CNB), SS
(CNB), SS, DCP
(CNB), SS

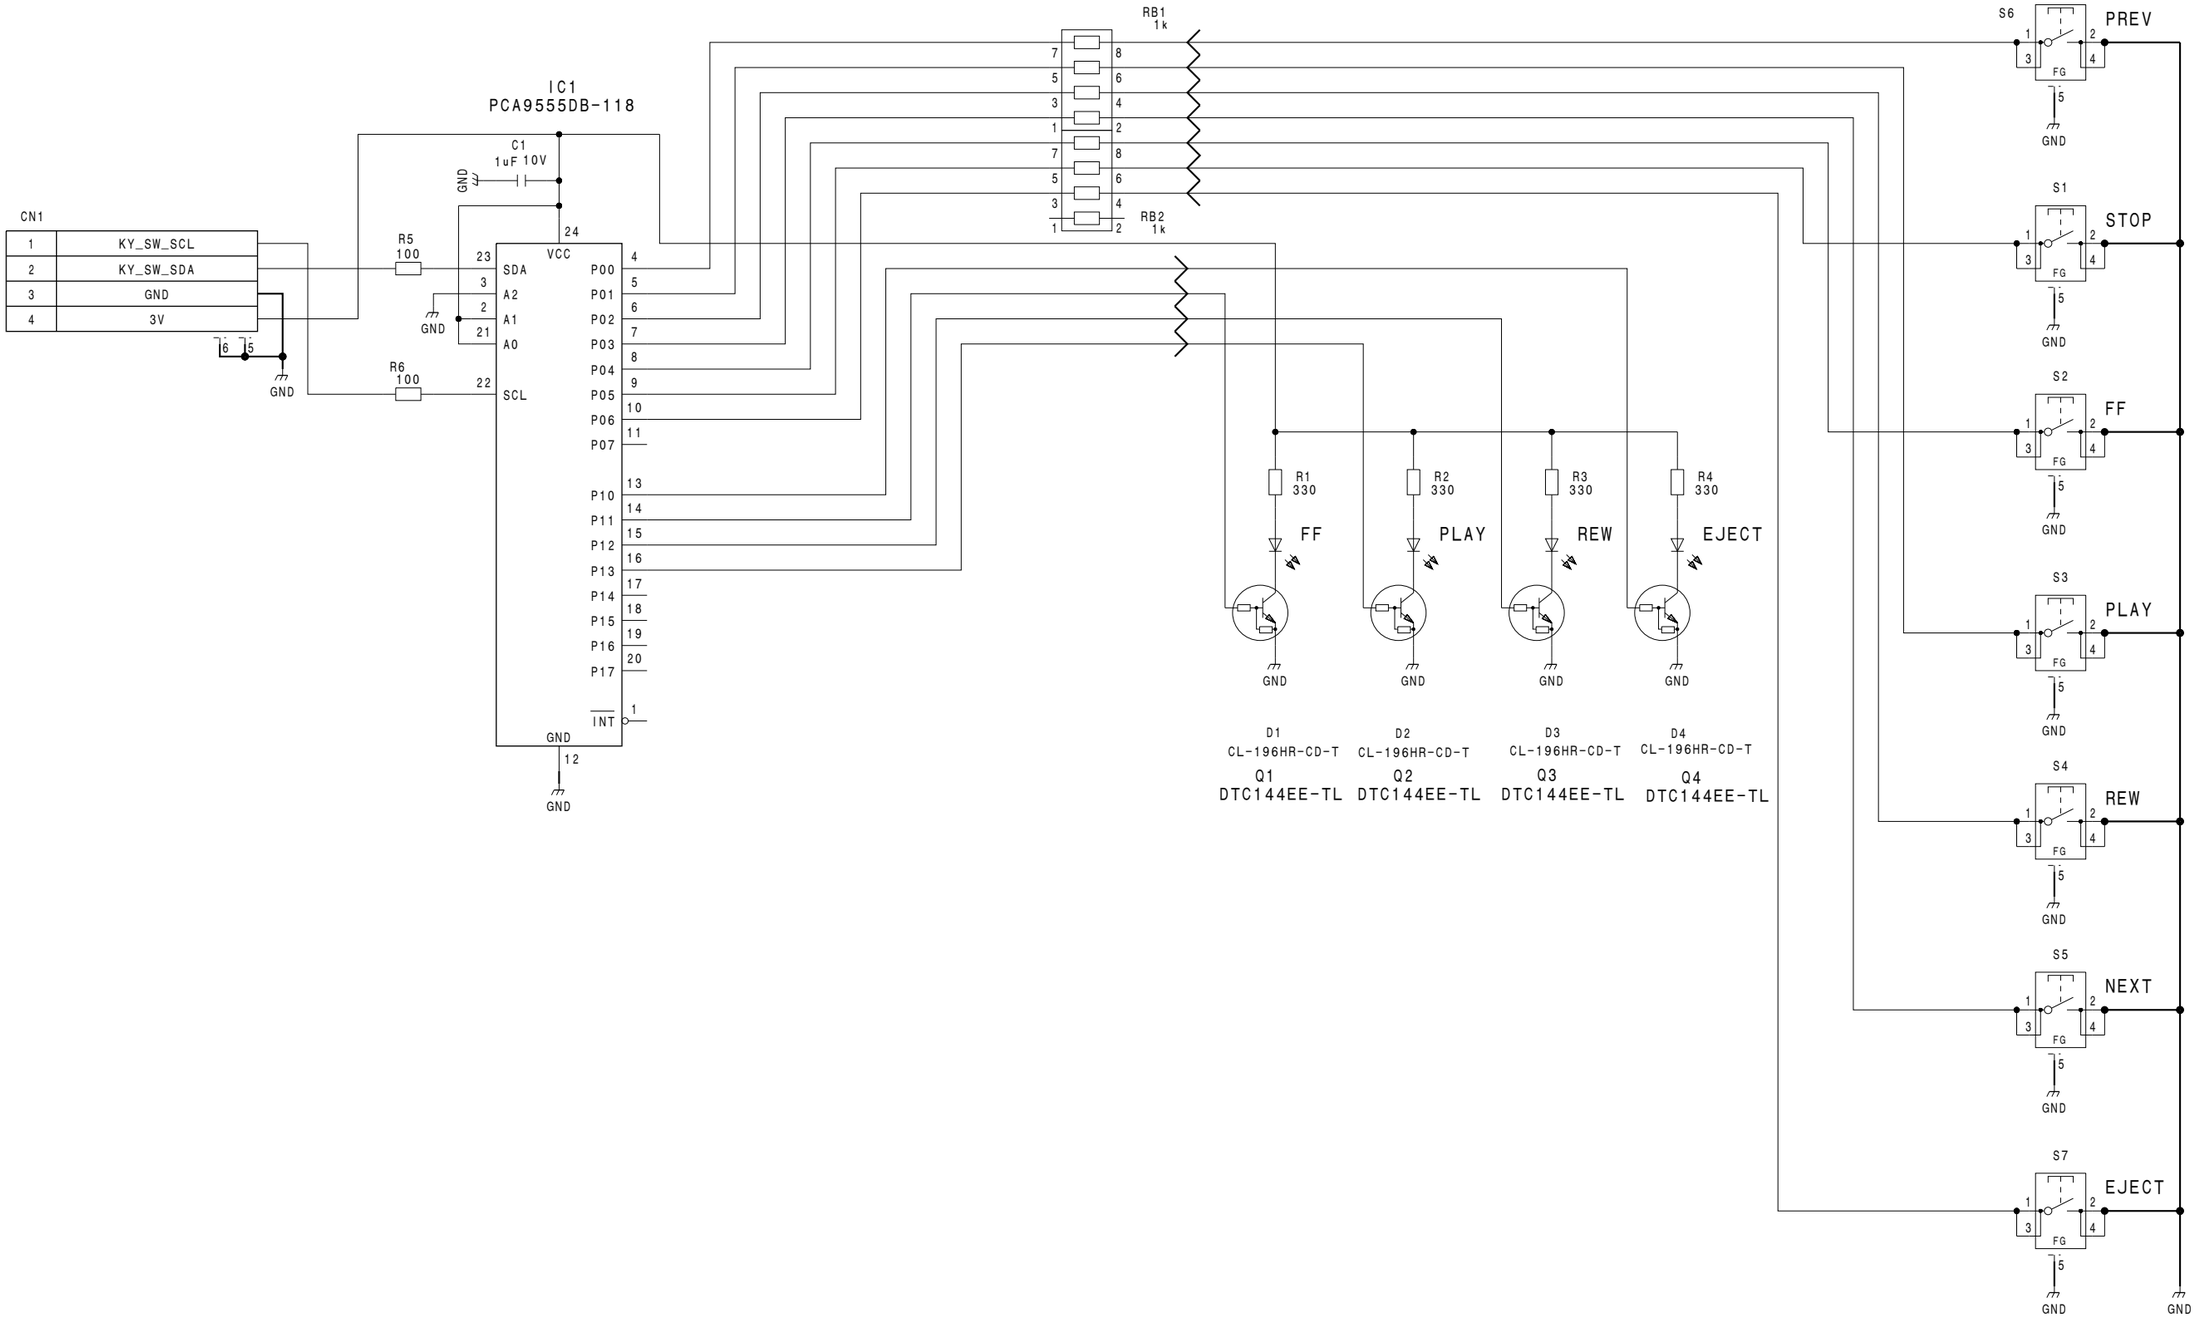



KY-623
BOARD NO. 1-876-853-11
VCX-434_KY-623_011_1

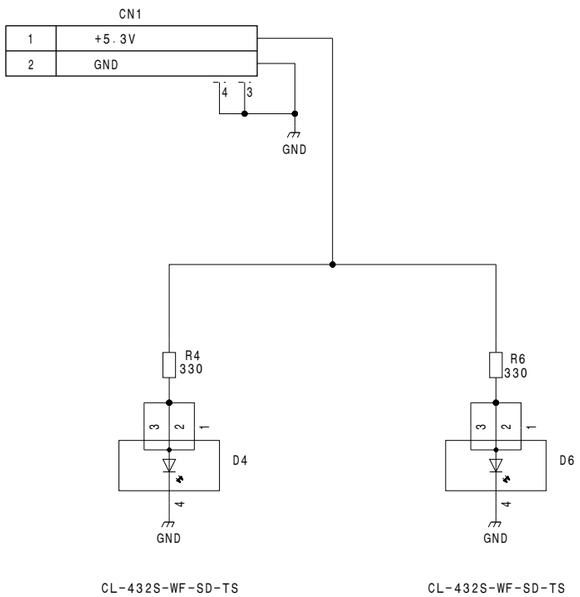


LED-444

BOARD NO. 1-866-589-11
VCX-434_LED-444_001_1

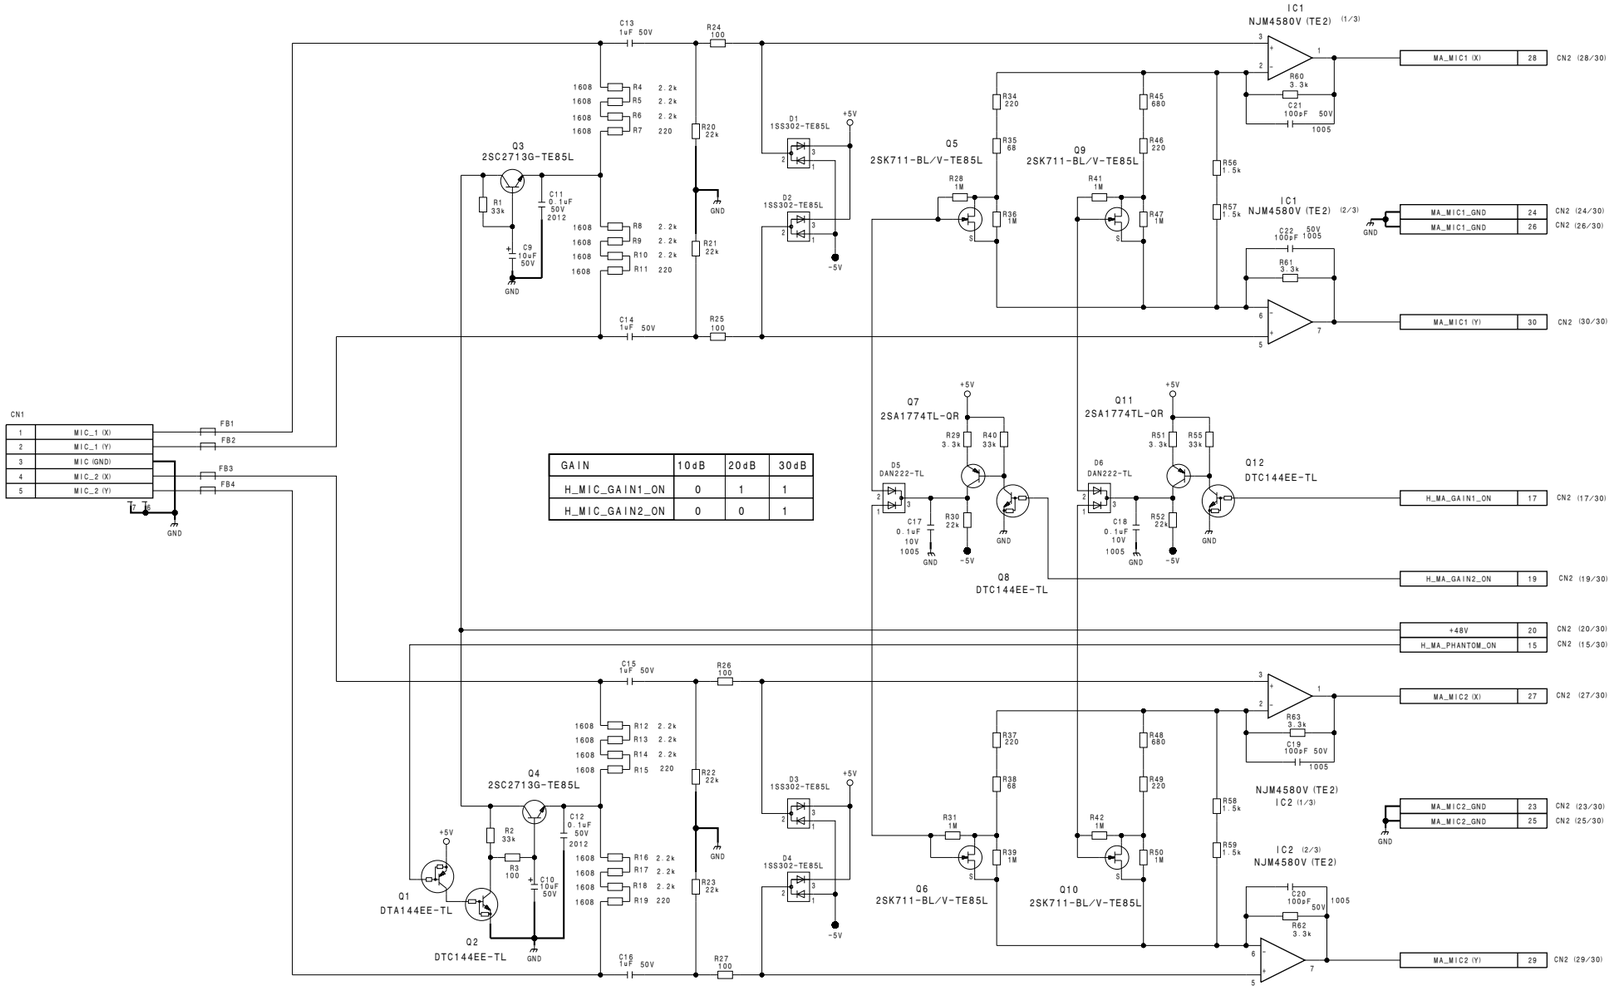

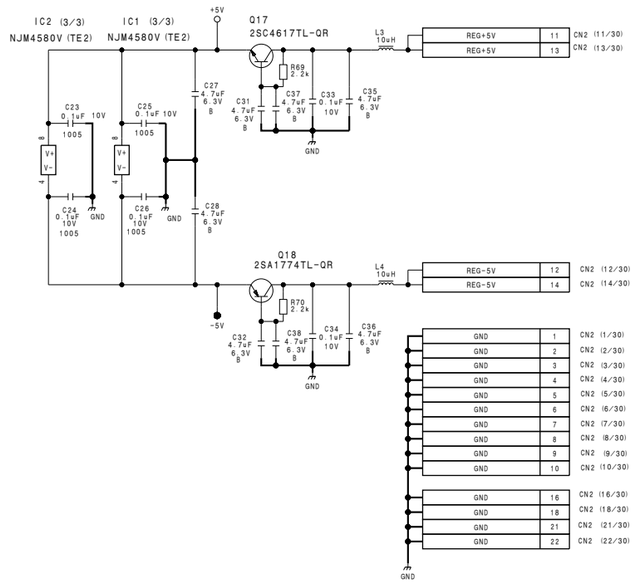

MA-162
BOARD NO. 1-876-825-11
VCX-434_MA-162_011_1

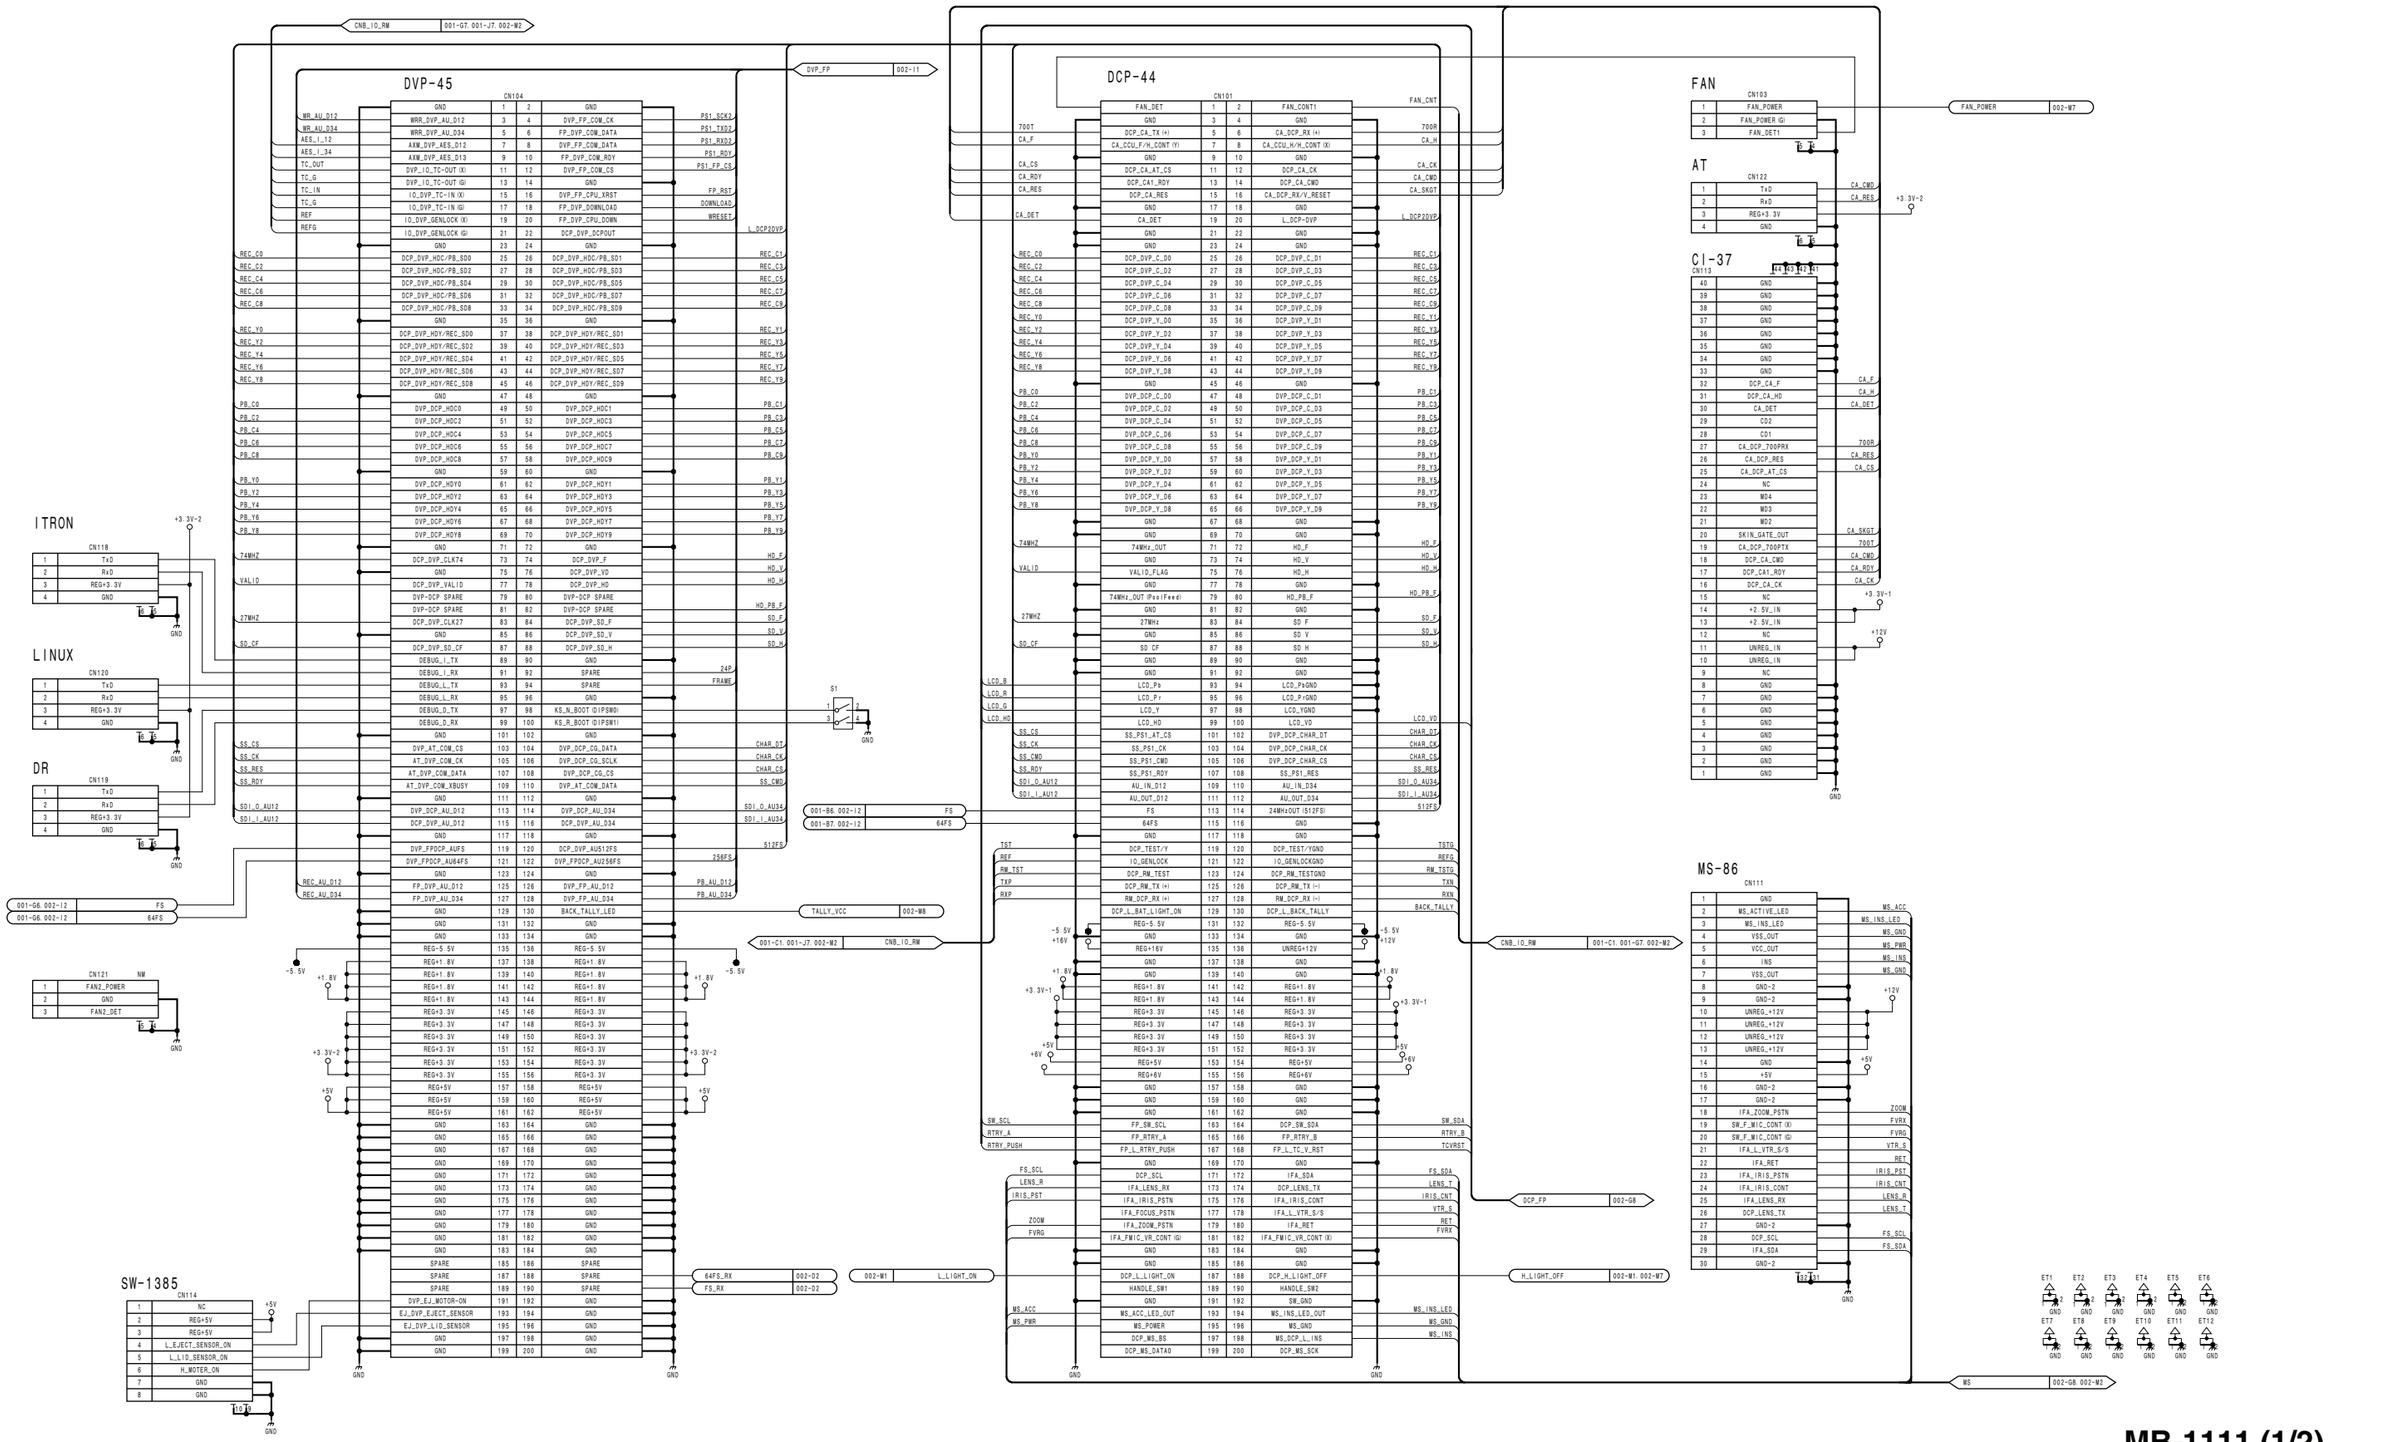

MB-1111 (1/2)
BOARD NO. 1-876-842-13
PDW-700_MB-1111_130_1

PDW-F800/V2 (J,E)

MB-1111 (2/2) **SUFFIX: -13**

RE-246

CN108

1	REG-5.5V
2	REG-5.5V
3	GND
4	GND
5	REG+5V
6	REG+5V
7	REG+5V
8	REG+5V
9	REG+5V_DR
10	REG+5V_DR
11	GND
12	GND
13	GND
14	GND
15	REG+1.8V
16	GND
17	REG+1.8V
18	REG+1.8V
19	REG+1.8V
20	REG+1.8V
21	REG+1.8V
22	REG+1.8V
23	GND
24	GND
25	GND
26	GND
27	GND
28	GND
29	REG+3.3V-1
30	REG+3.3V-1
31	REG+3.3V-1
32	REG+3.3V-1
33	REG+3.3V-1
34	REG+3.3V-1
35	REG+3.3V-1
36	REG+3.3V-1
37	REG+3.3V-2
38	REG+3.3V-2
39	REG+3.3V-2
40	REG+3.3V-2
41	REG+3.3V-2
42	REG+3.3V-2
43	REG+3.3V-2
44	REG+3.3V-2
45	REG+3.3V-2
46	REG+3.3V-2
47	GND
48	GND
49	GND
50	GND
51	GND
52	GND
53	GND
54	GND
55	GND
56	GND
57	GND
58	GND
59	GND
60	GND
61	GND
62	GND
63	REG+6V
64	REG+6V
65	GND
66	GND
67	REG+7V
68	GND
69	REG+10V
70	REG+10V
71	GND
72	REG+10V
73	GND
74	GND
75	REG-8.5V
76	REG+16V
77	REG+24V
78	REG+48V
79	UNREG+12V
80	GND
81	UNREG+12V
82	UNREG+12V
83	UNREG+12V
84	UNREG+12V
85	UNREG+12V
86	UNREG+12V
87	UNREG+12V
88	UNREG+12V
89	GND
90	UNREG+12V
91	GND
92	GND
93	GND
94	GND
95	GND
96	GND
97	GND
98	GND
99	GND
100	H_SHUTDOWN

C1 0.01uF, C2 0.01uF, C3 0.01uF, C4 0.01uF, C5 0.01uF, C6 0.01uF, C7 0.01uF, C8 0.01uF, C9 0.01uF, C10 0.01uF, C11 0.01uF, C12 0.0047uF, C13 0.0047uF, C14 0.0047uF

RX-101

CN109

1	REG+7V
2	REG+7V
3	REG+7V
4	GND
5	GND
6	GND
7	REG-5V
8	WRR_AU1 (X)
9	WRR_AU1 (Y)
10	WRR_AU2 (X)
11	WRR_AU2 (Y)
12	WRR_AU_GND
13	FP_WRR_CS
14	FP_WRR_DO
15	FP_WRR_DI
16	FP_WRR_CLK
17	WRR_DET_H_DWL/L_AWL
18	FP_WRRBUS_SW_H_OFF/L_ON
19	DVP_WS (FS)
20	DVP_SCK (64FS)
21	DWL_SD12
22	DWL_SD34
23	WRR_GND_D
24	REG+3.3V

WRR_AX, WRR_AY, WRR_A2X, WRR_A2Y, WRR_AG, WRR_CS, WRR_DO, WRR_DI, WRR_CLK, WRR_H_DWL, WRR_SEL, WRR_AU_D12, WRR_AU_D34

FS_RX 001-E9, 64FS_RX 001-E9

MA-162

CN115

1	GND
2	GND
3	GND
4	GND
5	GND
6	GND
7	GND
8	GND
9	GND
10	GND
11	REG+5V
12	REG-5V
13	REG+5V
14	REG-5V
15	H_MA_PHANTOM_ON
16	GND
17	H_MIC_GAIN1_ON
18	GND
19	H_MIC_GAIN2_ON
20	+48V
21	GND
22	GND
23	MA_MIC2_GND
24	MA_MIC1_GND
25	MA_MIC2_GND
26	MA_MIC1_GND
27	MA_MIC2 (X)
28	MA_MIC1 (X)
29	MA_MIC2 (Y)
30	MA_MIC1 (Y)

PH, MGAIN1, MGAIN2, MIC_G, MIC2_X, MIC1_X, MIC2_Y, MIC1_Y

DR-601

CN123

1	GND
2	GND
3	GND
4	GND
5	REG+1.8V
6	REG+5V_DR
7	REG+5V_DR
8	REG+3.3V-1
9	EM+7.6V
10	REG+10V
11	REG+10V
12	GND
13	GND
14	GND

TG-260

CN102

1	GND
2	GND
3	REG+6V
4	REG+6V
5	REG+7V
6	REG-5.5V
7	REG+3.3V-1
8	REG+16V
9	REG-8.5V
10	REG+24V
11	REG+1.8V
12	GND
13	GND

C15 0.01uF, C16 0.01uF, C17 0.01uF, C18 0.01uF, C19 0.01uF, C20 0.01uF, C21 0.0047uF, C22 0.01uF

FP-157-2

CN107

1	FP_AXM_SDA
2	GND
3	FP_AXM_SCL
4	GND
5	FP_BATT_SDA
6	GND
7	FP_BATT_SCL
8	BAT_ID_DATA
9	WRR_SEL_L_DIG/R_ANA
10	FP_WRR_CS
11	FP_WRR_CLK
12	FP_WRR_DO
13	FP_WRR_DI
14	FP_L_WDTIME_RESET
15	DVP_L_FP_CPU_RESET
16	DVP_FRAME
17	DVP_24P_FRAME
18	DVP_PS1_FP_CS
19	DVP_PS1_RXD2
20	DVP_PS1_TXD2
21	DVP_PS1_SCK2
22	DVP_PS1_RDY
23	GND
24	H_FP_DOWNLOAD
25	FP_L_RTRY_PUSH
26	FP_RTRY_A
27	FP_RTRY_B
28	DCP_FP_SDA
29	GND
30	DCP_FP_SCL

AXM_SDA, AXM_SCL, BATT_SDA, BATT_SCL, BAT_ID, WRR_SEL, WRR_CS, WRR_CLK, WRR_DO, WRR_DI, WRESET, FP_RST, FRAME, 24P, PS1_FP_CS, PS1_RXD2, PS1_TXD2, PS1_SCK2, PS1_RDY, DOWNLOAD, RTRY_PUSH, RTRY_A, RTRY_B, SW_SDA, SW_SCL

FP-157-1

CN801

1	LCD_HD
2	LCD_VD
3	GND
4	GND
5	LCD_B_VIDEO
6	LCD_G_VIDEO
7	LCD_R_VIDEO
8	GND
9	REG+5V
10	GND
11	GND
12	REG+15.5V

LCD_HD, LCD_VD, LCD_B, LCD_G, LCD_R

KY-623

CN112

1	KY_SW_SCL
2	KY_SW_SDA
3	GND
4	REG+3.3V

AXM_SCL, AXM_SDA

SW

CN2

1	POWER_SW
2	GND

001-J8 DCP_FP, 001-W9,002-W2 WS

FP-157-3

CN106

1	CNB_L_EX_DC1N
2	FP_H_PWRON_HOLD
3	FP_H_MONITOR_ON_MUTE
4	DVP_FP_AU_256FS
5	DVP_FP_AU_64FS
6	DVP_FP_AU_FS
7	GND
8	DVP_PB_AU_D12
9	DVP_PB_AU_D34
10	FP_REC_AU_D12
11	FP_REC_AU_D34
12	FP_L_TC_V_RST
13	GND
14	GND
15	REG+3.3V-1
16	REG+3.3V-1
17	GND
18	GND
19	GND
20	UNREG+12V
21	UNSW+12V
22	GND
23	GND
24	REG+5V
25	REG+5V
26	GND
27	GND
28	REG-5.5V
29	REG-5.5V
30	WRR_DET_H_DWL

DC1N, PHOLD, AU_MUTE, 256FS, PB_AU_D12, PB_AU_D34, REC_AU_D12, REC_AU_D34, TCVRST, WRR_H_DWL

64FS 001-B7,001-G6, FS 001-B6,001-G6

FP-157-4

CN105

1	FP_AU_PB2 (G)
2	FP_AU_PB2 (X)
3	FP_AU_PB2 (Y)
4	FP_AU_PB1 (G)
5	FP_AU_PB1 (X)
6	FP_AU_PB1 (Y)
7	AXM_CH2_MIC/LINE (G)
8	AXM_CH2_MIC/LINE (Y)
9	AXM_CH2_MIC/LINE (X)
10	AXM_CH1_MIC/LINE (G)
11	AXM_CH1_MIC/LINE (Y)
12	AXM_CH1_MIC/LINE (X)
13	WRR_AG (G)
14	WRR_AU (Y)
15	WRR_AU (X)
16	WRR_CA_AU2 (Y)
17	WRR_CA_AU2 (X)
18	SW_L_PWR_SWON
19	GND
20	MA_MIC_H_GAIN2_ON
21	MA_MIC_H_GAIN1_ON
22	MA_H_PHANTOM_ON
23	SW_FWIC_VR_CONT (X)
24	FWIC_VR_CONT (G)
25	MA_FWIC2 (Y)
26	MA_FWIC2 (X)
27	MA_FWIC (G)
28	MA_FWIC1 (Y)
29	MA_FWIC1 (X)
30	MA_FWIC (G)

AU_PB2_G, AU_PB2_X, AU_PB2_Y, AU_PB1_G, AU_PB1_X, AU_PB1_Y, AU_IN2_G, AU_IN2_Y, AU_IN2_X, AU_IN1_G, AU_IN1_Y, AU_IN1_X, WRR_AG, WRR_AY, WRR_AX, WRR_A2Y, WRR_A2X, MGAIN2, MGAIN1, PH, FVRX, FVRG, MIC2_Y, MIC2_X, MIC_G, MIC1_Y, MIC1_X, MIC_G

CN-3005

CN110

1	DCP_L_LIGHT_ON
2	DCP_H_LIGHT_OFF
3	DCP_SCL
4	IFA_SDA
5	REG+5V
6	GND
7	VF_UNREG+12V
8	VF_GND

FS_SCL, FS_SDA, +5V, +12V

L_LIGHT_ON 001-G9, H_LIGHT_OFF 001-J9,002-W7

WS 001-W9,002-G8

IO-235

CN117

1	GND
2	DCP_TEST_/YGND
3	DCP_TEST_/Y
4	IO_GENLOCK_GND
5	IO_GENLOCK
6	GND
7	IO_EXT_TC_IN (X)
8	IO_EXT_TC (G)
9	SS_EXT_TC_OUT (X)

TSTP, TST, REFG, REF, TC_IN, TC_G, TC_OUT

CNB_IO_RW 001-C1,001-G7,001-J7

RM-203

CN116

1	DCP_RW_TX+
2	DCP_RW_TX-
3	RW_DCP_RX (+)
4	RW_DCP_RX (-)
5	DATA_GND
6	UNREG+12V
7	UNREG_GND
8	DCP_RW_TEST

TXP, TXN, RXP, RXN, RW_TSTB, RW_TST, +12V

CNB-25


CN1

H_SHUTDOWN	1	2	FP_H_PWRON_MUTE
REG_+5V	3	4	REG_-5V
GND	5	6	GND
GND	7	8	GND
GND	9	10	GND
GND	11	12	GND
GND	13	14	GND
GND	15	16	GND
GND	17	18	REG_+48V
UNREG_+12V	19	20	UNREG_+12V
UNREG_+12V	21	22	UNREG_+12V
UNREG_+12V	23	24	UNREG_+12V
UNREG_+12V	25	26	UNREG_+12V
UNREG_+12V	27	28	UNREG_+12V
UNREG_+12V	29	30	UNREG_+12V
UNREG_+12V	31	32	UNREG_+12V
UNSW_+12V	33	34	IFA_L_PWR_SWON
UNSW_+12V	35	36	CNB_L_EX_DC1N
FP_H_PWR_HOLD	37	38	FP_AU_PB1 (Y)
FP_AU_PB1 (X)	39	40	GND
FP_AU_PB1 (G)	41	42	FP_AU_PB2 (Y)
FP_AU_PB2 (X)	43	44	GND
FP_AU_PB2 (G)	45	46	GND
GND	47	48	INFO_BATT_SDA
BAT_ID_DATA	49	50	INFO_BATT_SCL
FP_AXM_SDA	51	52	GND
FP_AXM_SCL	53	54	GND
GND	55	56	AXM_CH1_MIC_LINE (X)
AXM_CH1_MIC_LINE (Y)	57	58	AXM_CH1_MIC_LINE (G)
AXM_CH2_MIC_LINE (X)	59	60	AXM_CH2_MIC_LINE (Y)
AXM_CH2_MIC_LINE (G)	61	62	REG_+3.3V
CNB_TALLY_VCC	63	64	DCP_L_BACK_TALLY
GND	65	66	AES/EBU_L_CH1&2
GND (D)	67	68	AES/EBU_L_CH3&4
GND (D)	69	70	LIGHT_CONT
DR_+10V	71	72	DR_+10V
DR_+10V	73	74	DR_+10V
EM_+5V	75	76	EM_+5V
FAN_CNT	77	78	FAN_POWER
GND	79	80	FAN_POWER

PHOLD, AU_PB1_X, AU_PB1_G, AU_PB2_X, AU_PB2_G, BAT_ID, AXM_SDA, AXM_SCL, AU_IN1_Y, AU_IN2_X, AU_IN2_G, DC1N, AU_PB1_Y, AU_PB2_Y, BATT_SDA, BATT_SCL, AU_IN1_X, AU_IN1_G, AU_IN2_Y, +3.3V-1, BACK_TALLY, AES_I_12, AES_I_34, AU_MUTE, +5V, -5.5V, +48V, +12V, +12V-P, +10V, +7.6V, FAN_CNT

H_LIGHT_OFF 001-J9,002-W1, FAN_POWER 001-W1, TALLY_VCC 001-F6


DVP_FP 001-F1

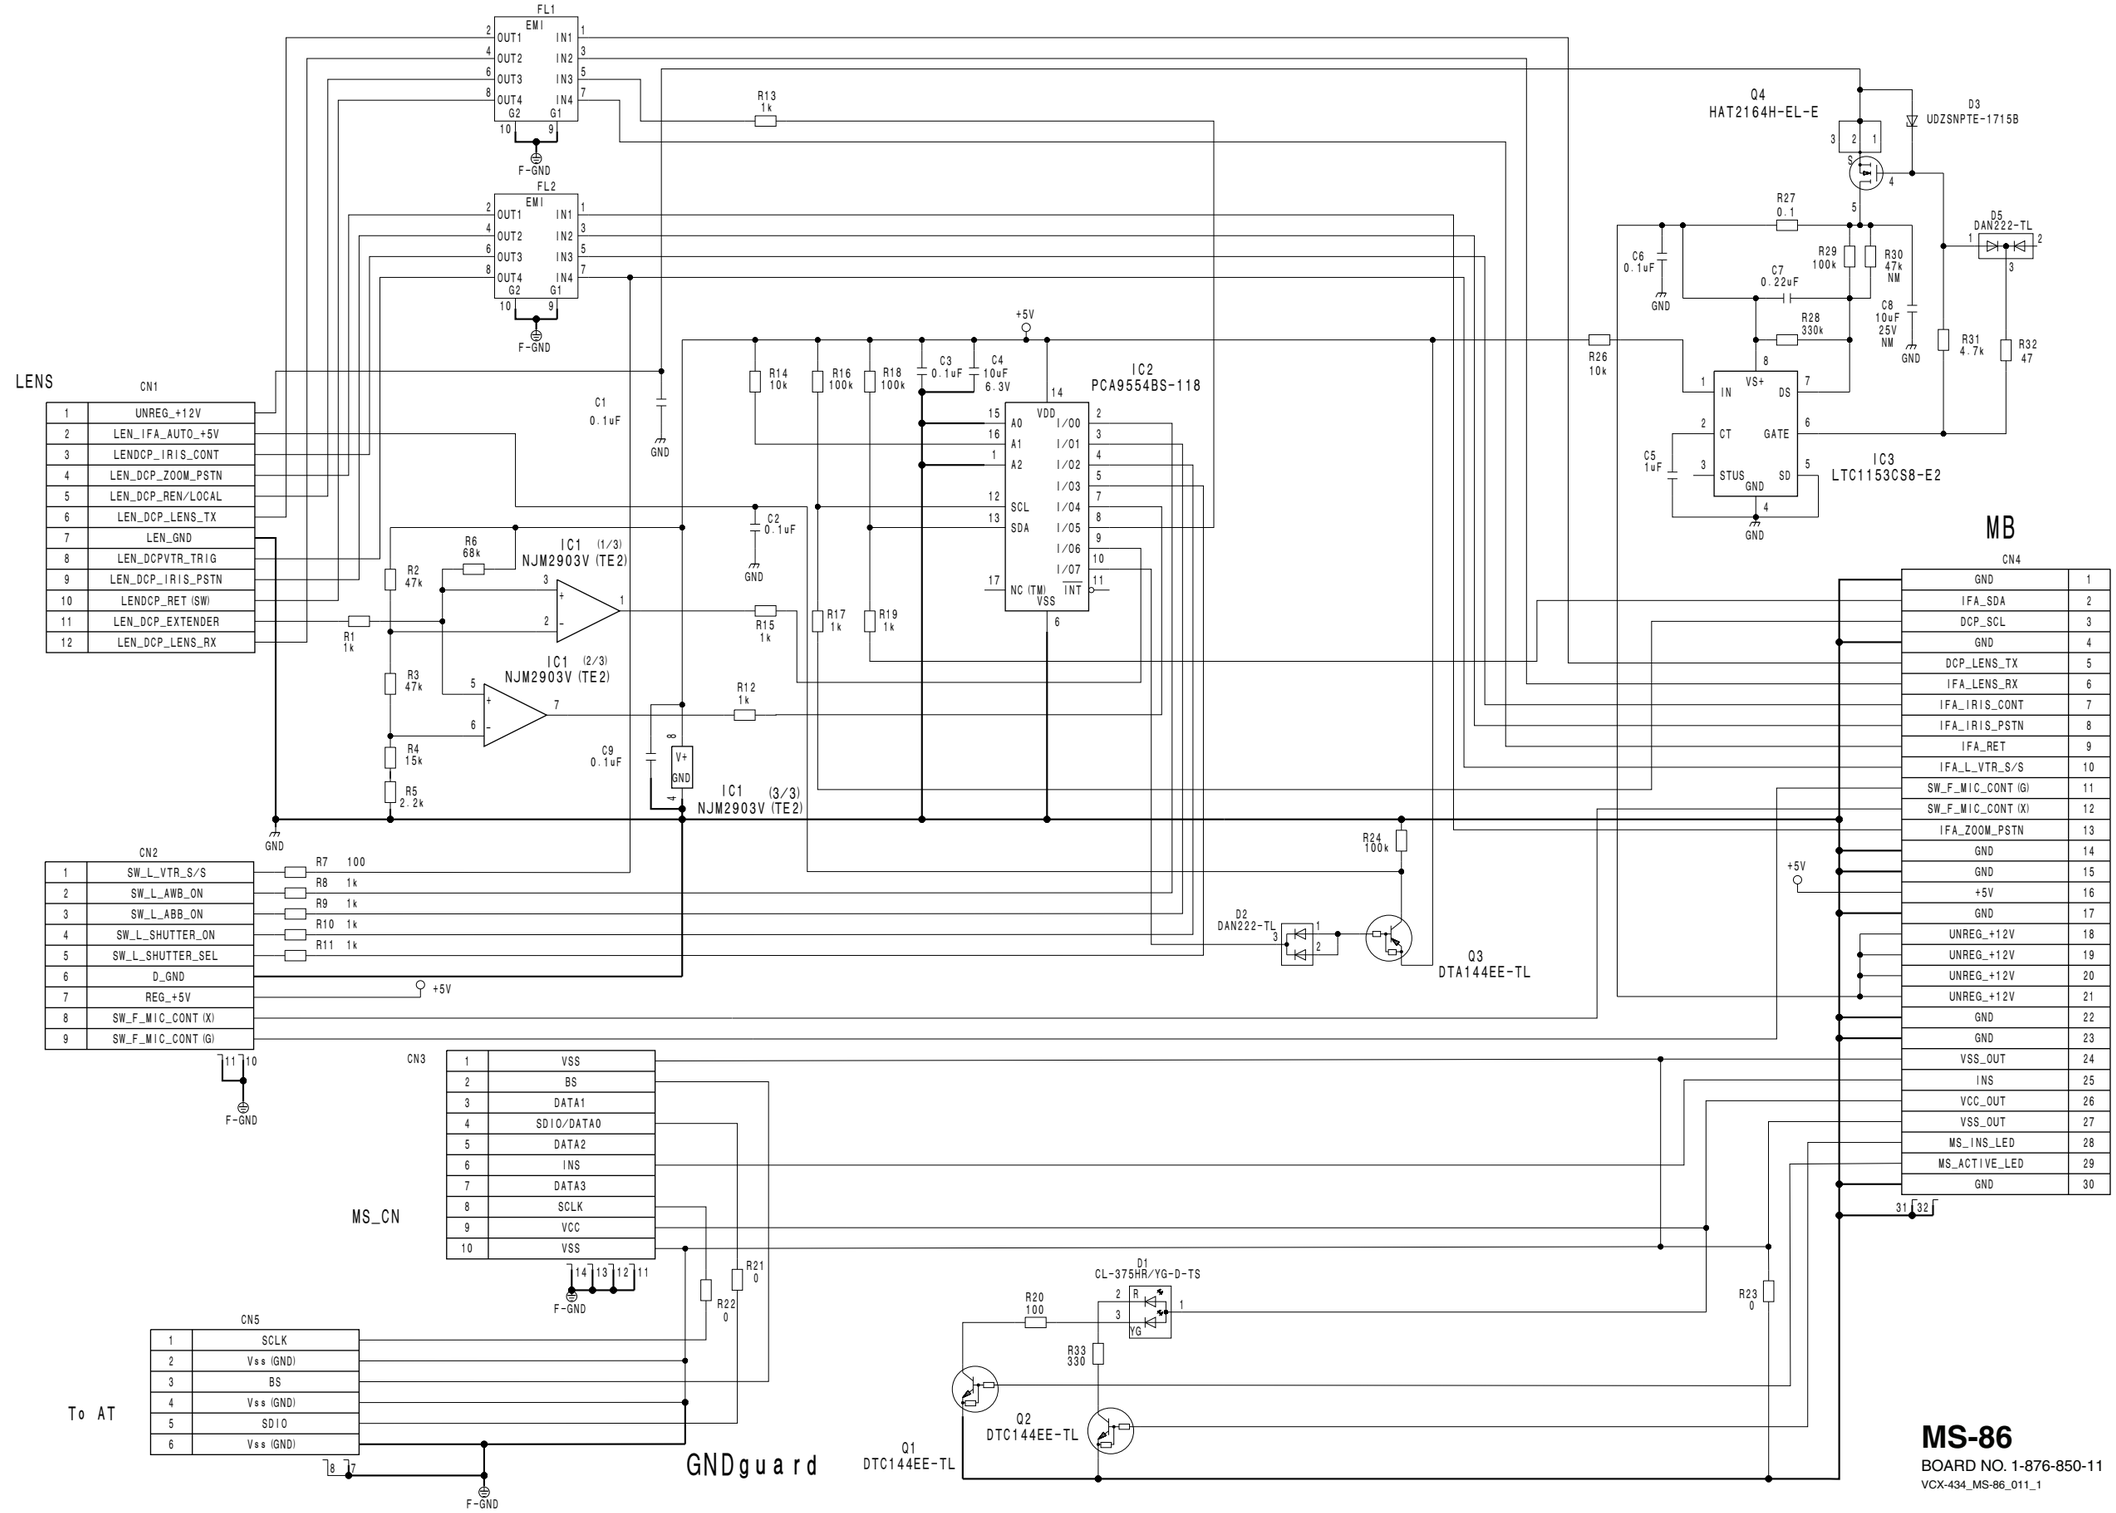


3-90 3-90

MS-86
BOARD NO. 1-876-850-11
VCX-434_MS-86_011_1


PDW-F800/V2 (J,E)

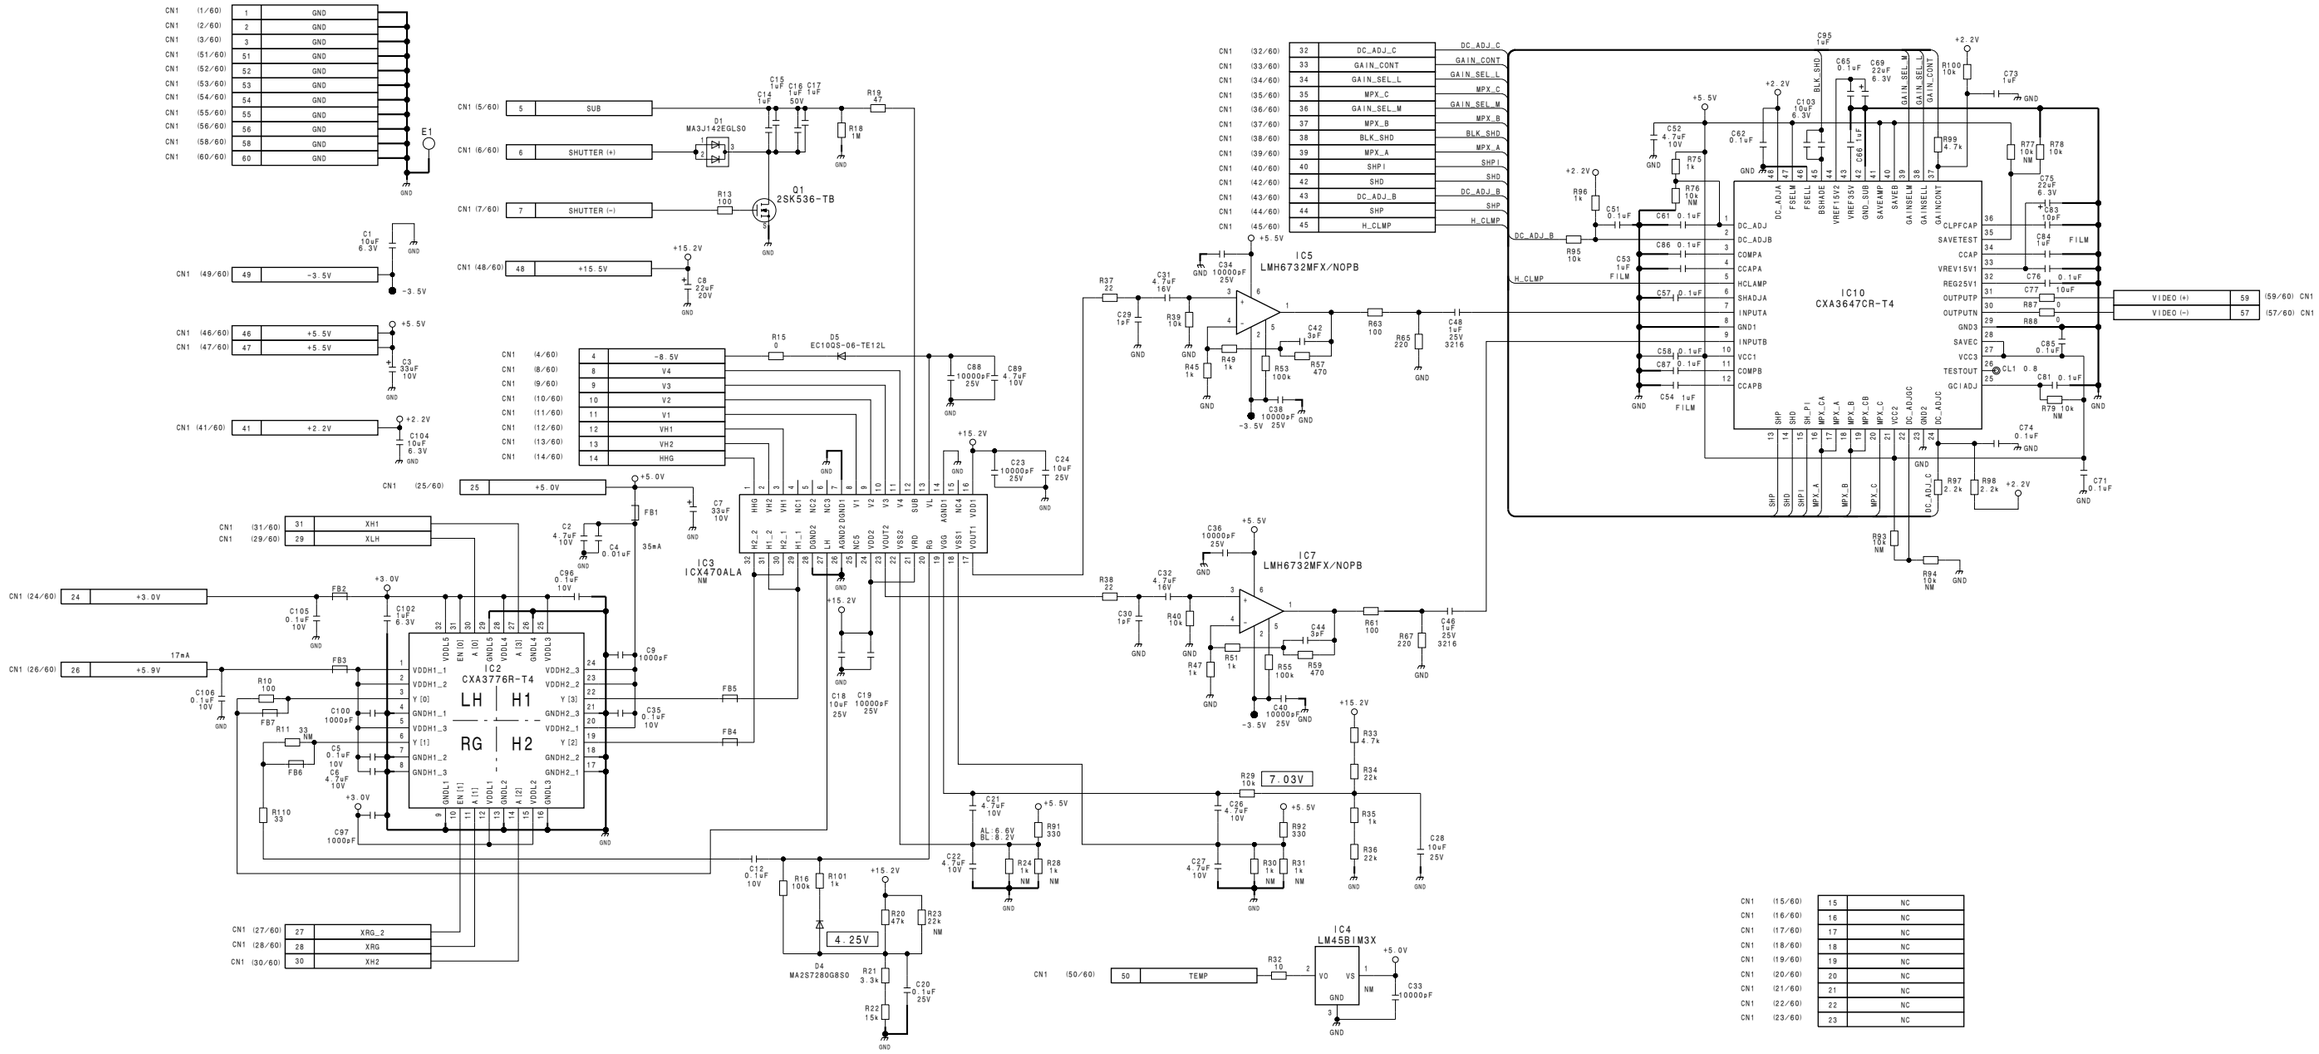


PA-342A
BOARD NO. 1-876-782-21
VCX-434_PA-342_012_1

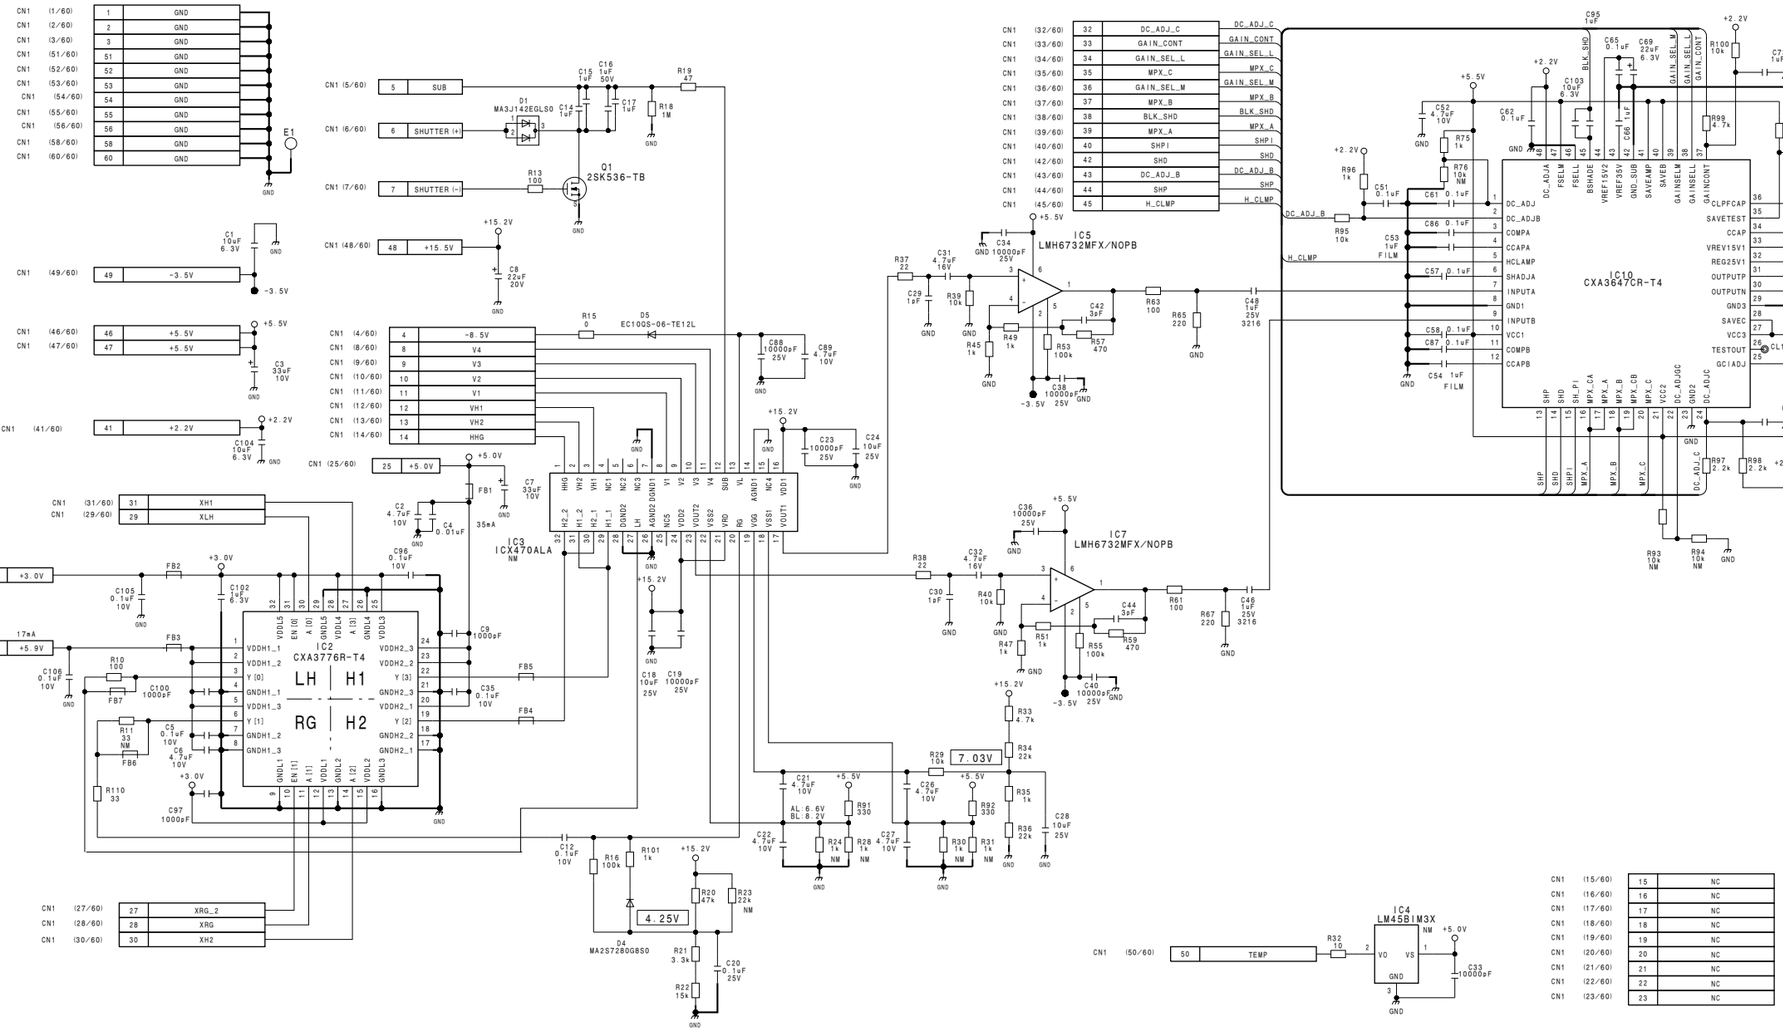


PA-343A
BOARD NO. 1-876-783-21
VCX-434_PA-343_012_1

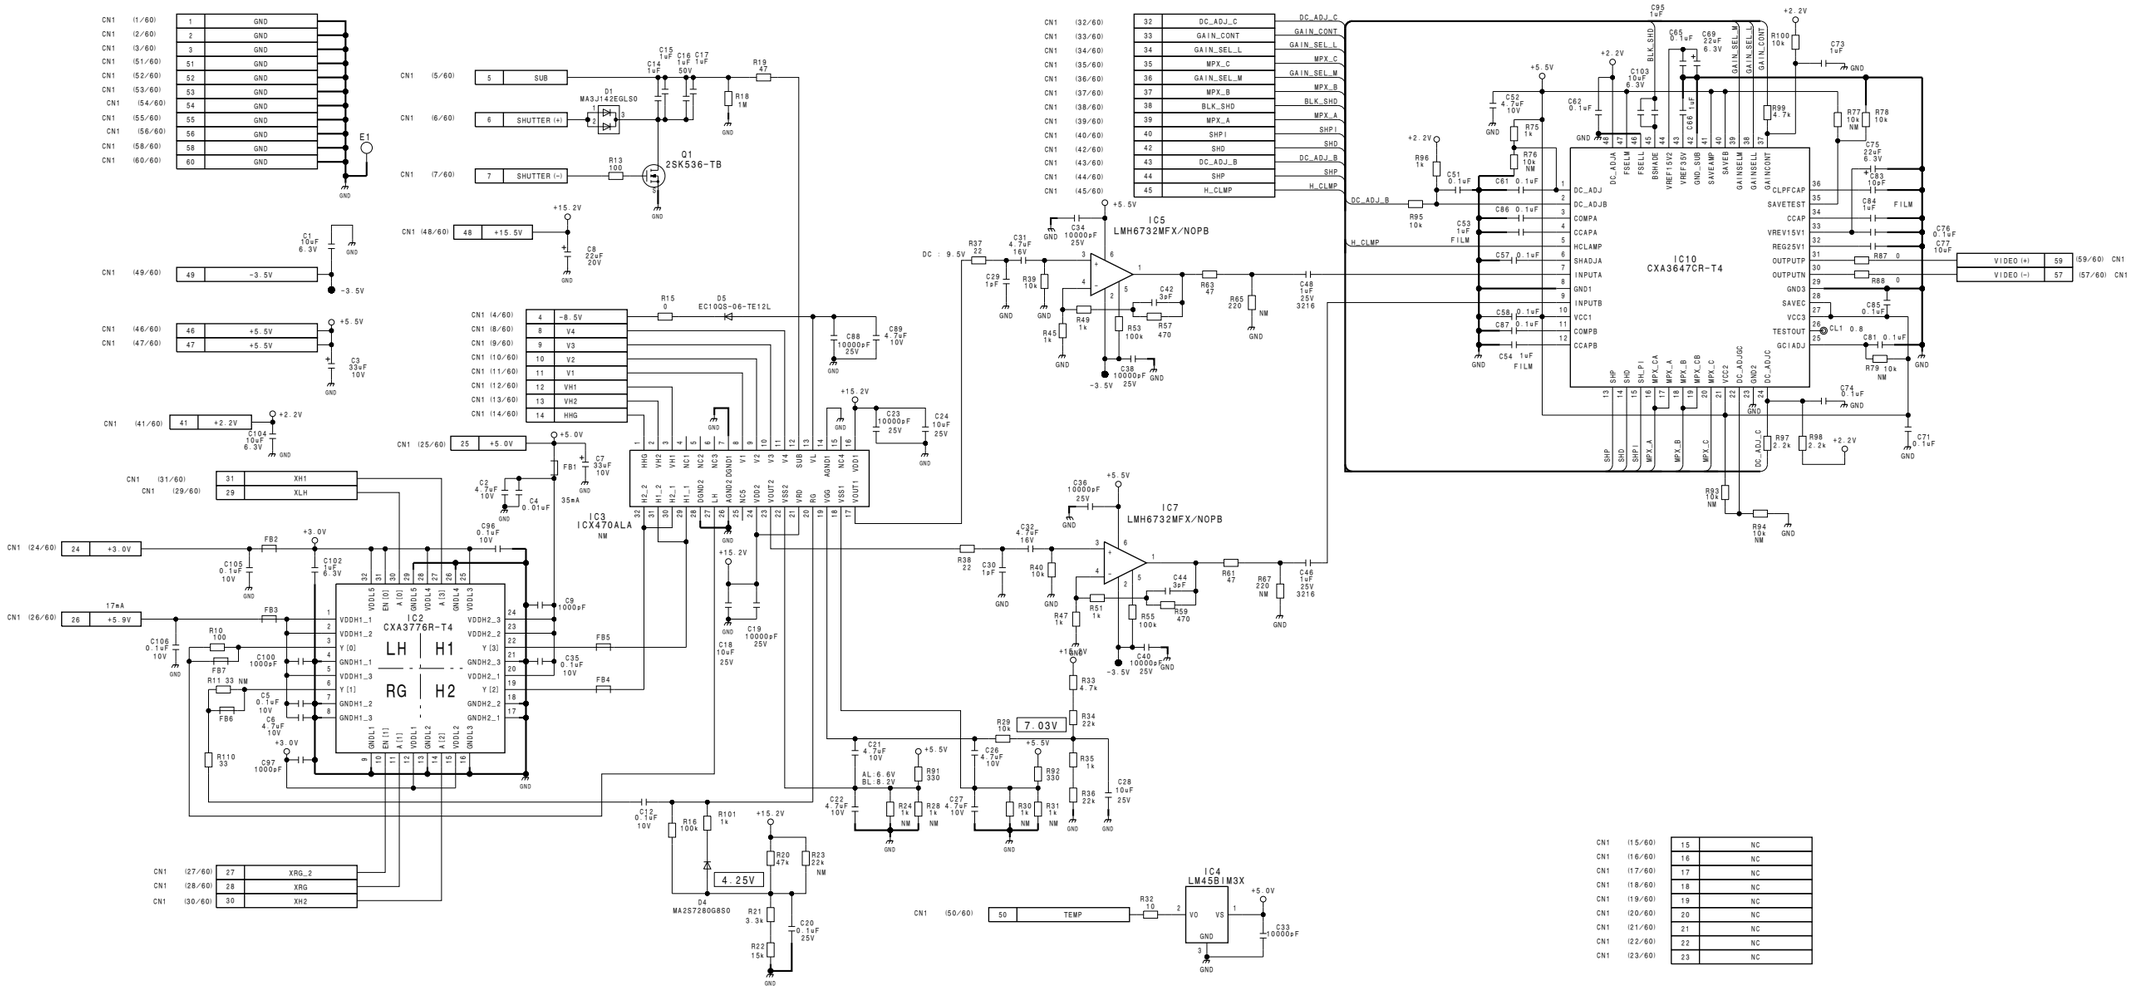

IC2 CXA3776R-T4
IC3 ICX470ALA
IC5 LMH6732MFX/NOPB
IC7 LMH6732MFX/NOPB
IC10 CXA3647CR-T4
IC4 LM45BIM3X
Q1 2SK536-TB
D1 MA3J142EGLS0
D4 MA2S728OGBS0
D5 EC10QS06-TE12L
E1
4.25V
7.03V
CN1 (1/60) GND
CN1 (2/60) GND
CN1 (3/60) GND
CN1 (51/60) GND
CN1 (52/60) GND
CN1 (53/60) GND
CN1 (54/60) GND
CN1 (55/60) GND
CN1 (56/60) GND
CN1 (58/60) GND
CN1 (60/60) GND
CN1 (5/60) SUB
CN1 (6/60) SHUTTER (+)
CN1 (7/60) SHUTTER (-)
CN1 (48/60) 48 +15.5V
CN1 (49/60) 49 -3.5V
CN1 (46/60) 46 +5.5V
CN1 (47/60) 47 +5.5V
CN1 (41/60) 41 +2.2V
CN1 (31/60) 31 XH1
CN1 (29/60) 29 XLH
CN1 (24/60) 24 +3.0V
CN1 (26/60) 26 +5.9V
CN1 (27/60) 27 XRG_2
CN1 (28/60) 28 XRG
CN1 (30/60) 30 XH2
CN1 (4/60) 4 -8.5V
CN1 (8/60) 8 V4
CN1 (9/60) 9 V3
CN1 (10/60) 10 V2
CN1 (11/60) 11 V1
CN1 (12/60) 12 VH1
CN1 (13/60) 13 VH2
CN1 (14/60) 14 HHG
CN1 (25/60) 25 +5.0V
CN1 (32/60) 32 DC_ADJ_C
CN1 (33/60) 33 GAIN_CONT
CN1 (34/60) 34 GAIN_SEL_L
CN1 (35/60) 35 MPX_C
CN1 (36/60) 36 GAIN_SEL_M
CN1 (37/60) 37 MPX_B
CN1 (38/60) 38 BLK_SHD
CN1 (39/60) 39 MPX_A
CN1 (40/60) 40 SHP!
CN1 (42/60) 42 SHD
CN1 (43/60) 43 DC_ADJ_B
CN1 (44/60) 44 SHP
CN1 (45/60) 45 H_CLMP
CN1 (50/60) 50 TEMP
CN1 (15/60) 15 NC
CN1 (16/60) 16 NC
CN1 (17/60) 17 NC
CN1 (18/60) 18 NC
CN1 (19/60) 19 NC
CN1 (20/60) 20 NC
CN1 (21/60) 21 NC
CN1 (22/60) 22 NC
CN1 (23/60) 23 NC
VIDEO (+) 59 (59/60) CN1
VIDEO (-) 57 (57/60) CN1

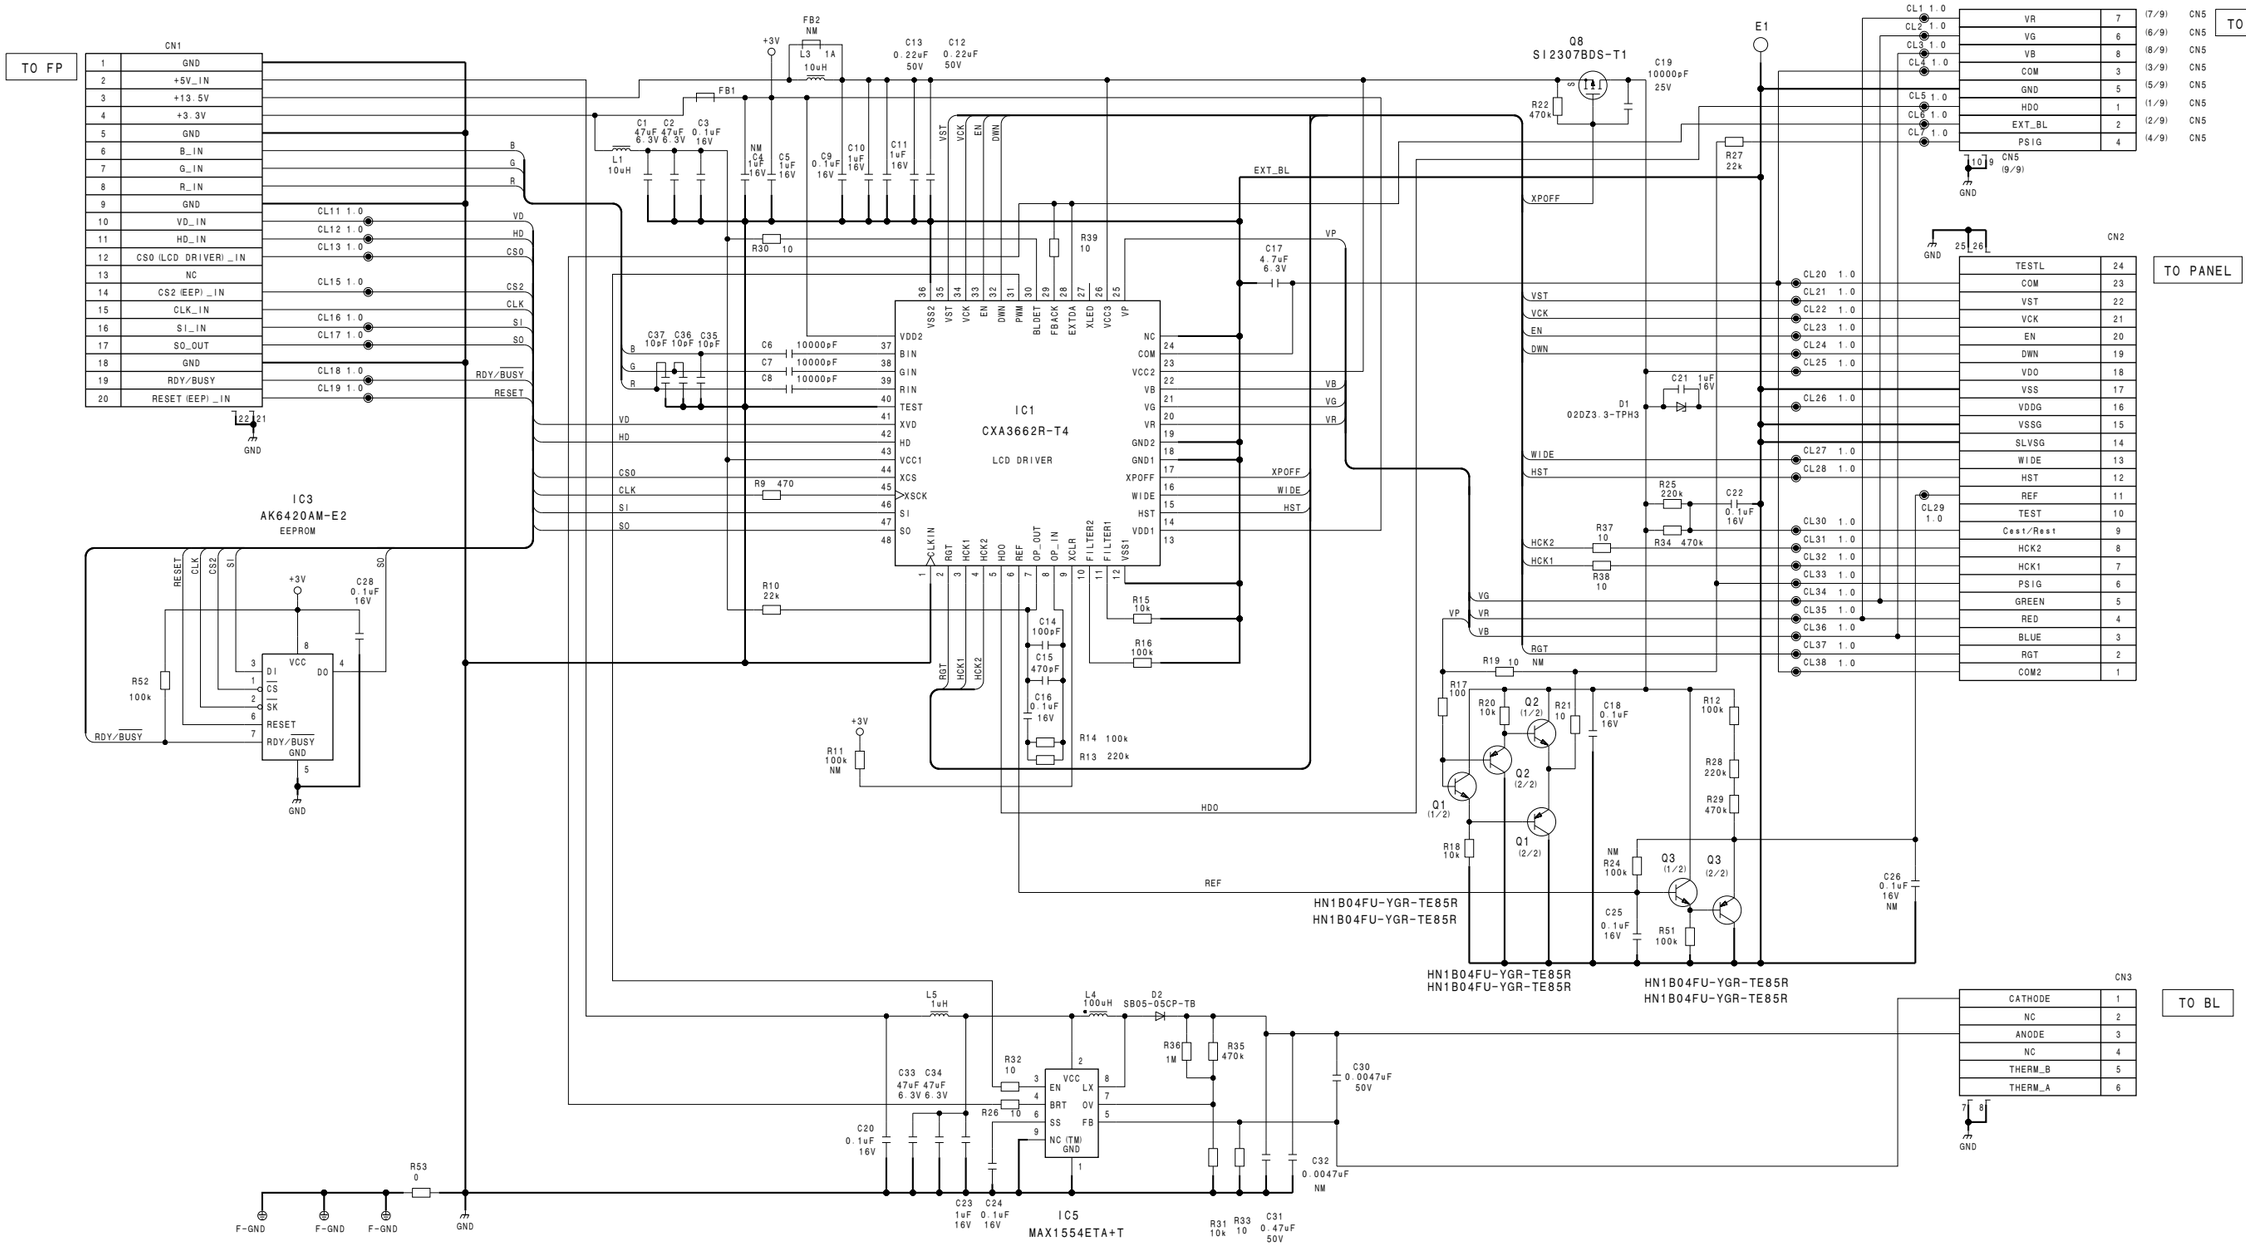

PD-118
BOARD NO. 1-876-827-11
VCX-434_PD-118_011_1

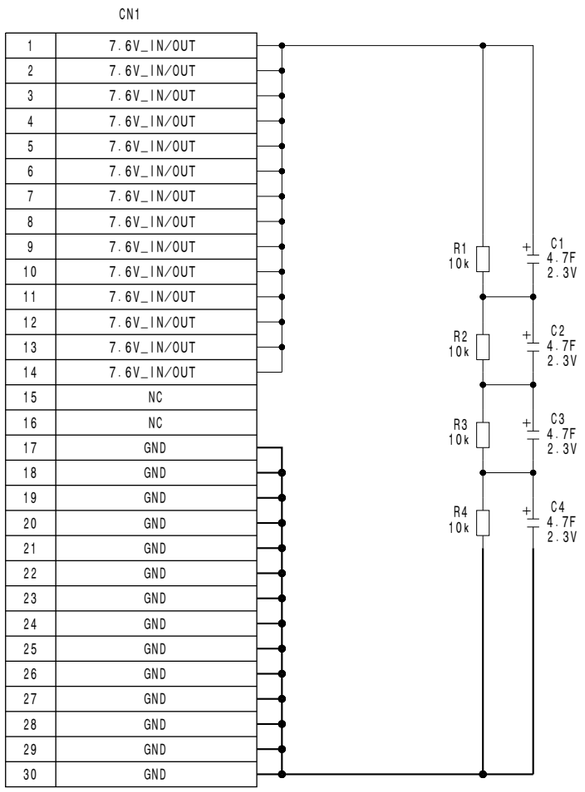



PS-708
BOARD NO. 1-869-492-11
VCX-434_PS-708_002_1

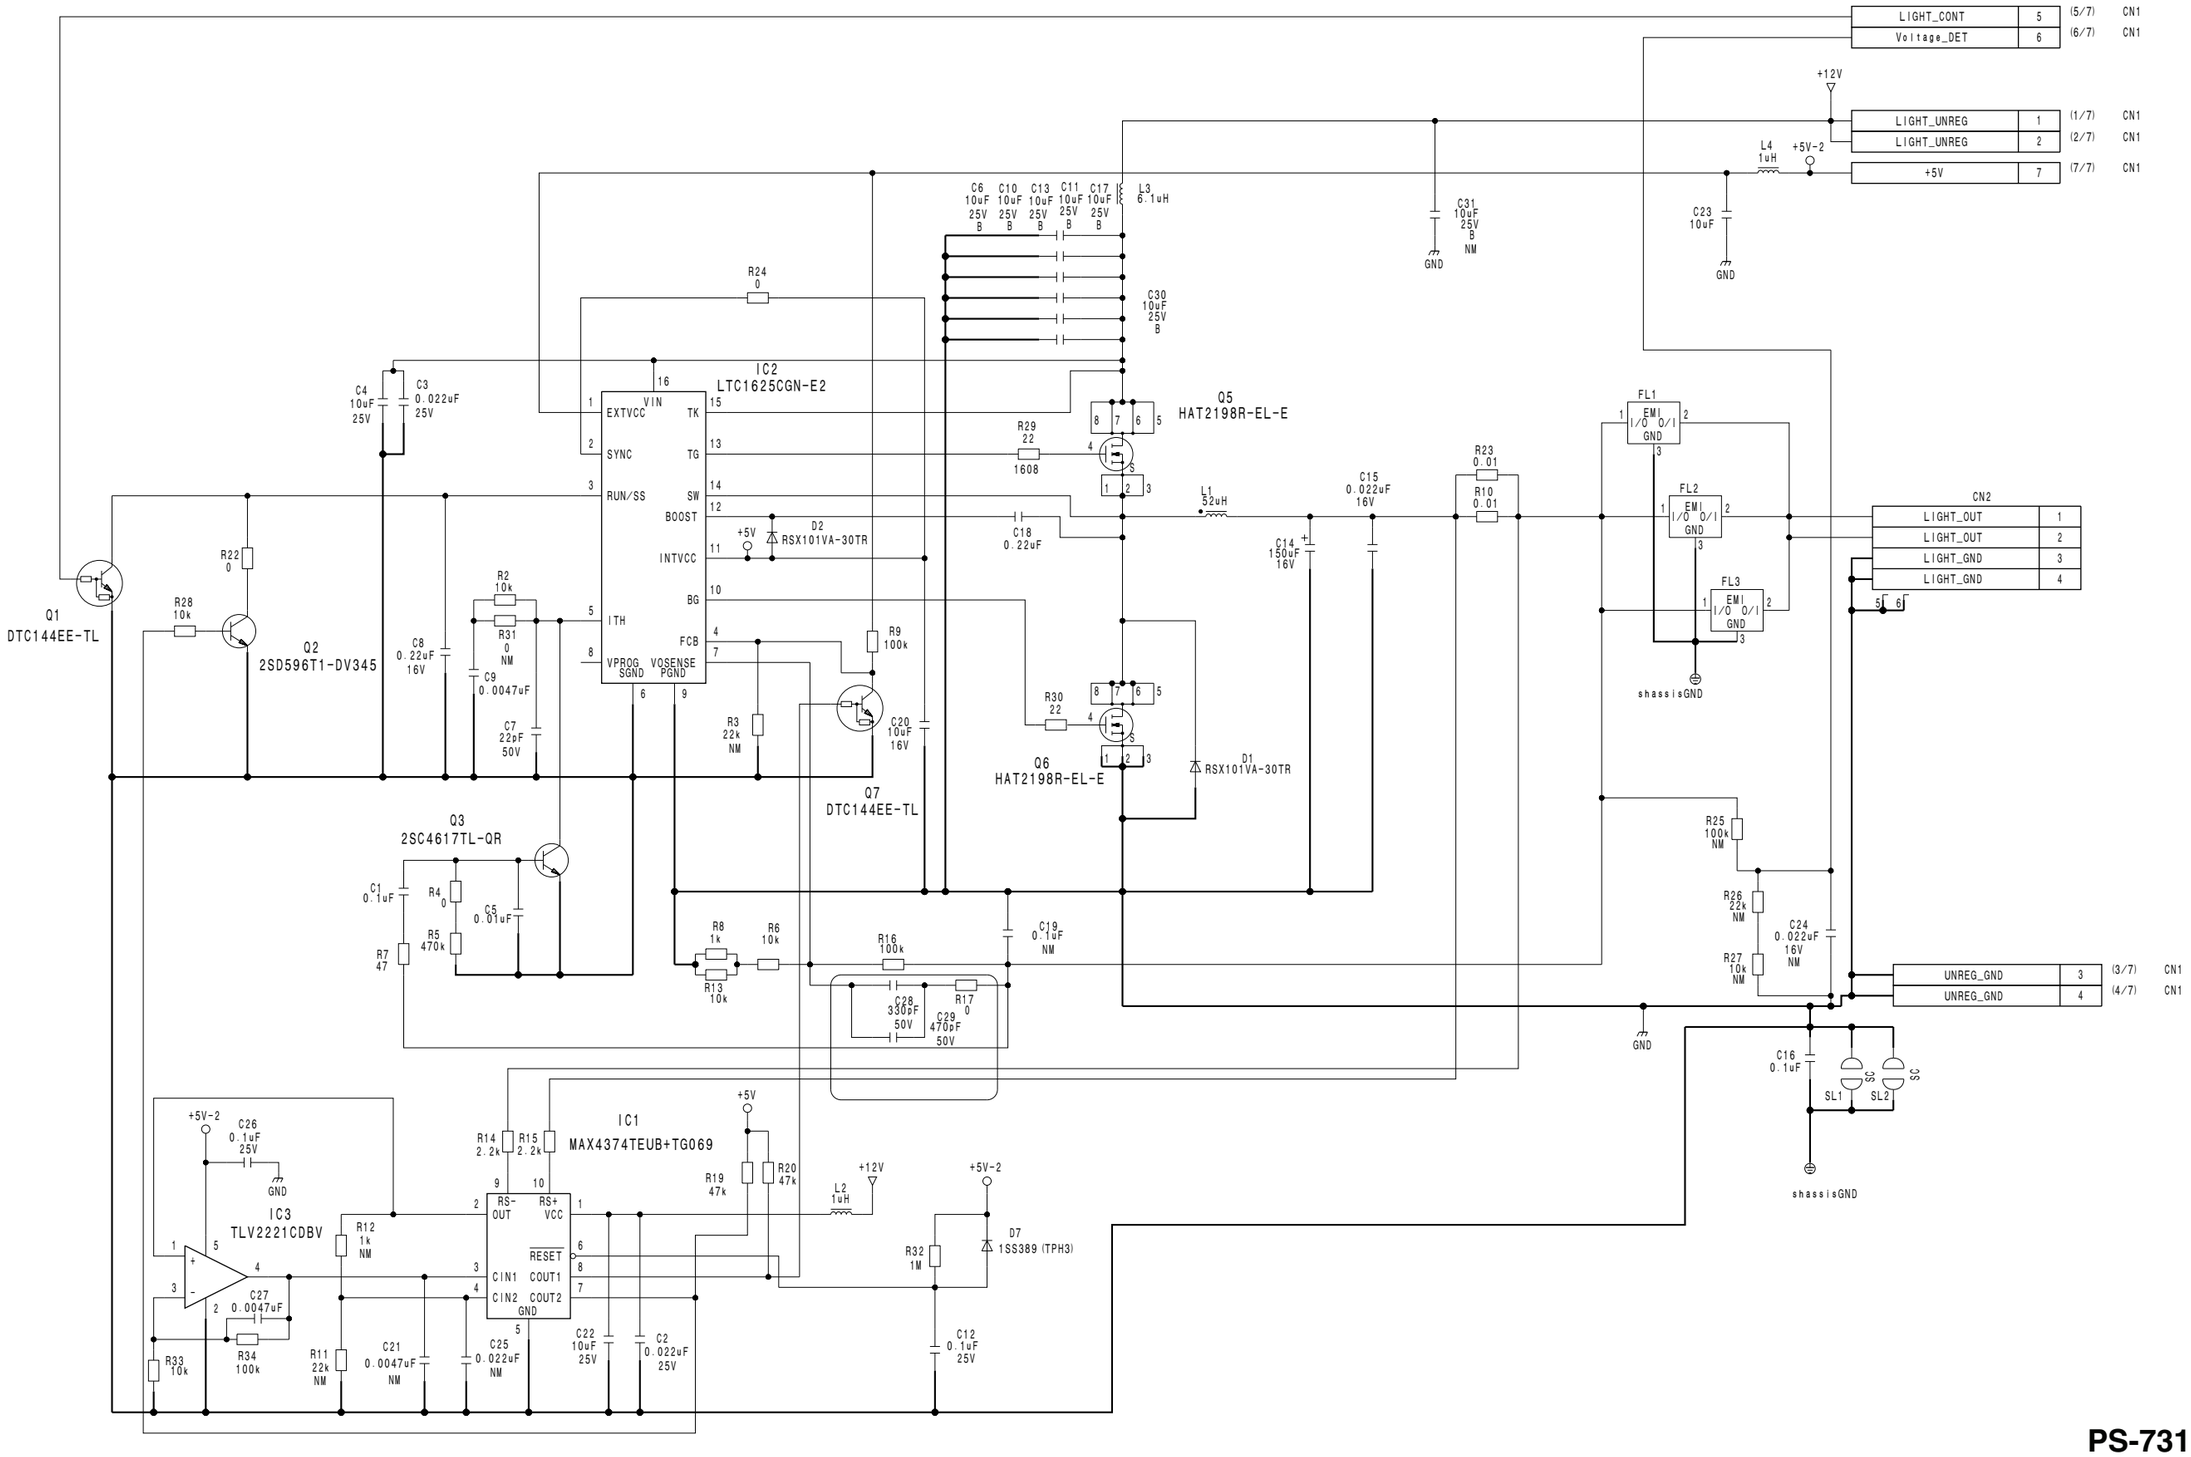


PS-731
BOARD NO. 1-876-828-11
VCX-434_PS-731_111_1


RE-246 (1/2)
SUFFIX: -13

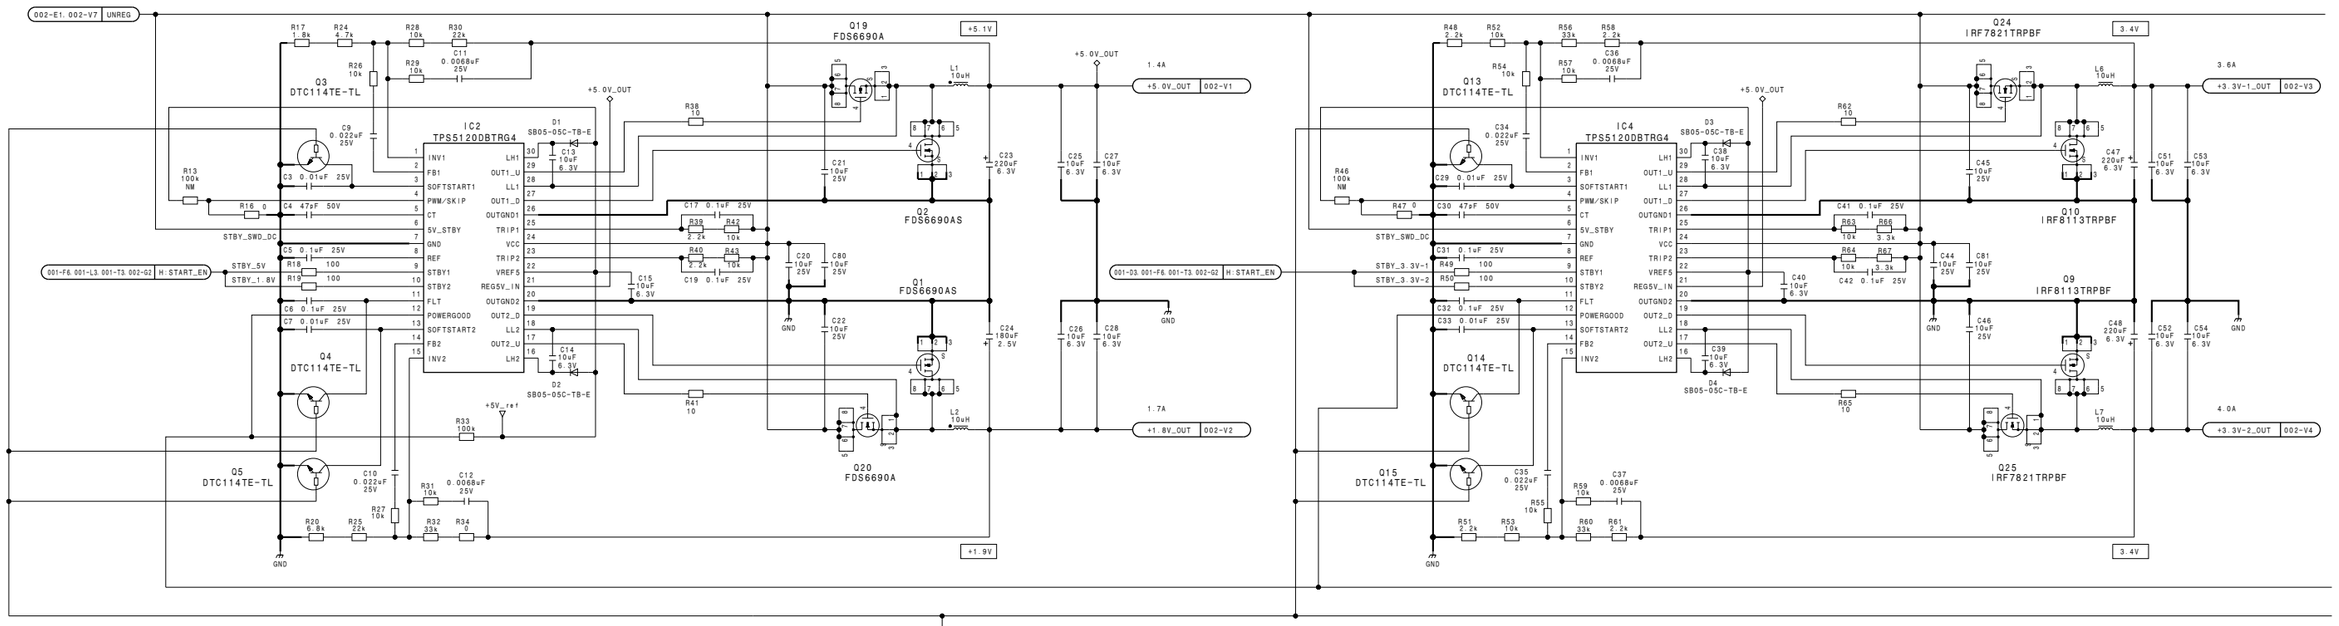

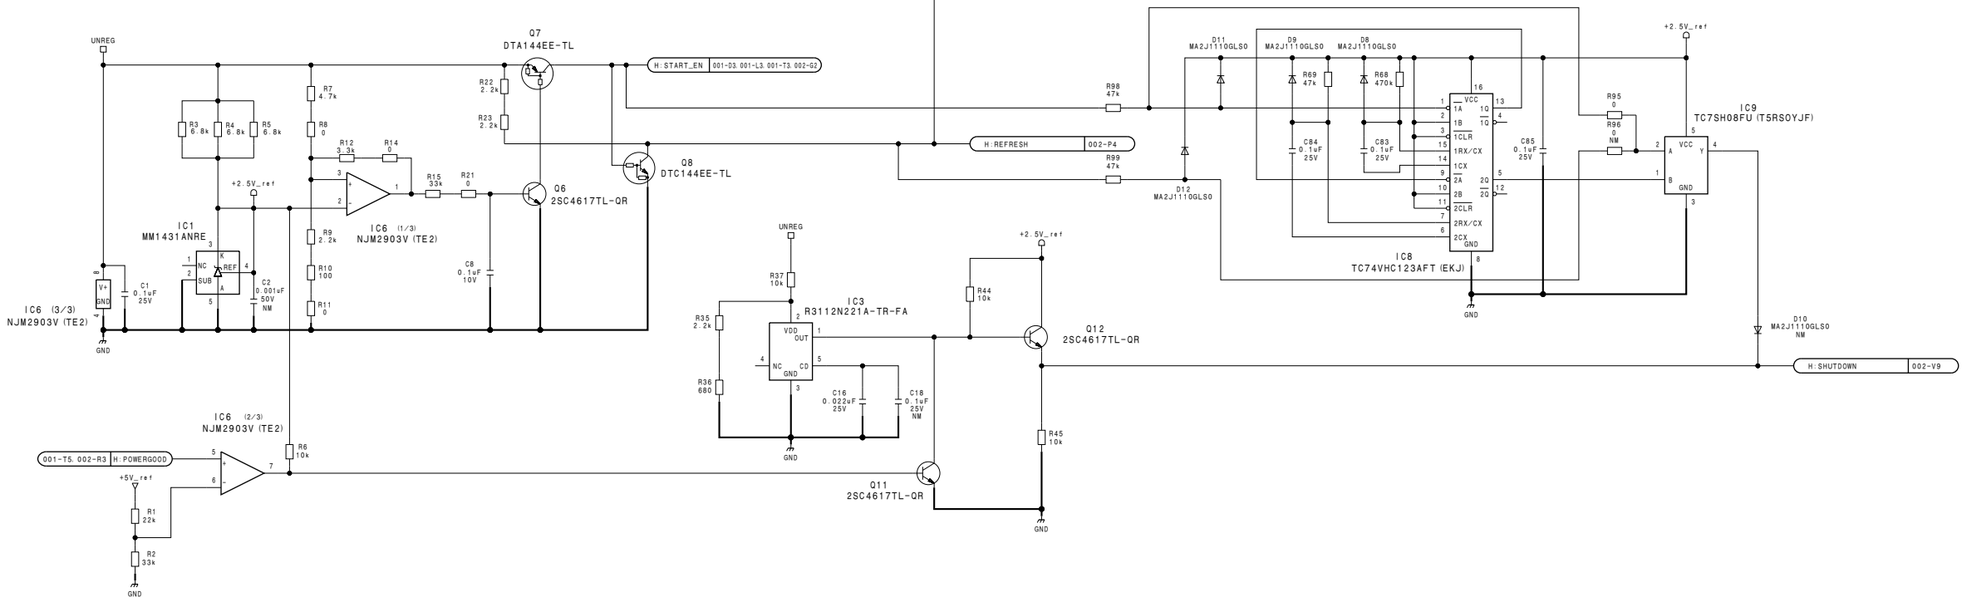



3-98

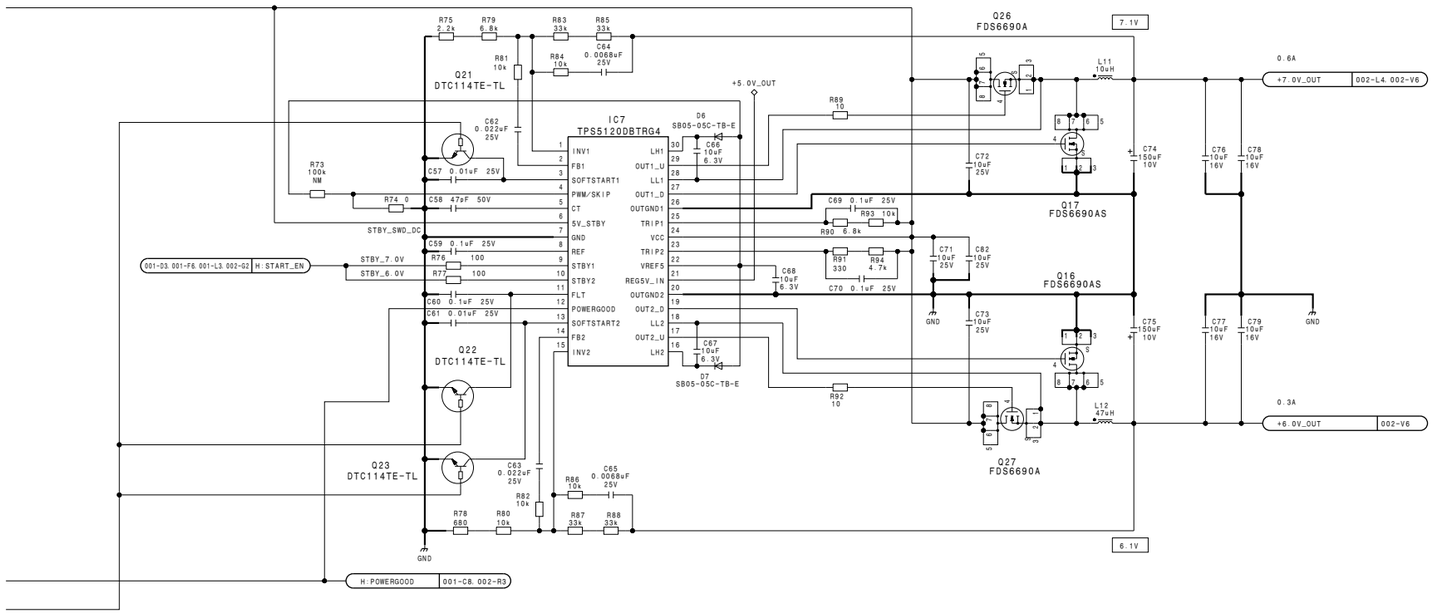
Q26
FDS6690A
7.1V
Q21
DTC114TE-TL
IC7
TPS51200DBTRG4
D6
SB05-05C-TB-E
+5.0V_OUT
L11
10uH
0.6A
+7.0V_OUT
002-L4.002-V6
Q17
FDS6690AS
Q16
FDS6690AS
Q22
DTC114TE-TL
Q23
DTC114TE-TL
D7
SB05-05C-TB-E
L12
47uH
0.3A
+6.0V_OUT
002-V6
Q27
FDS6690A
6.1V
GND
001-03.001-F6.001-L3.002-G2
H:START_EN
STBY_7.0V
STBY_6.0V
STBY_SWD_DC
H:POWERGOOD
001-C8.002-R3

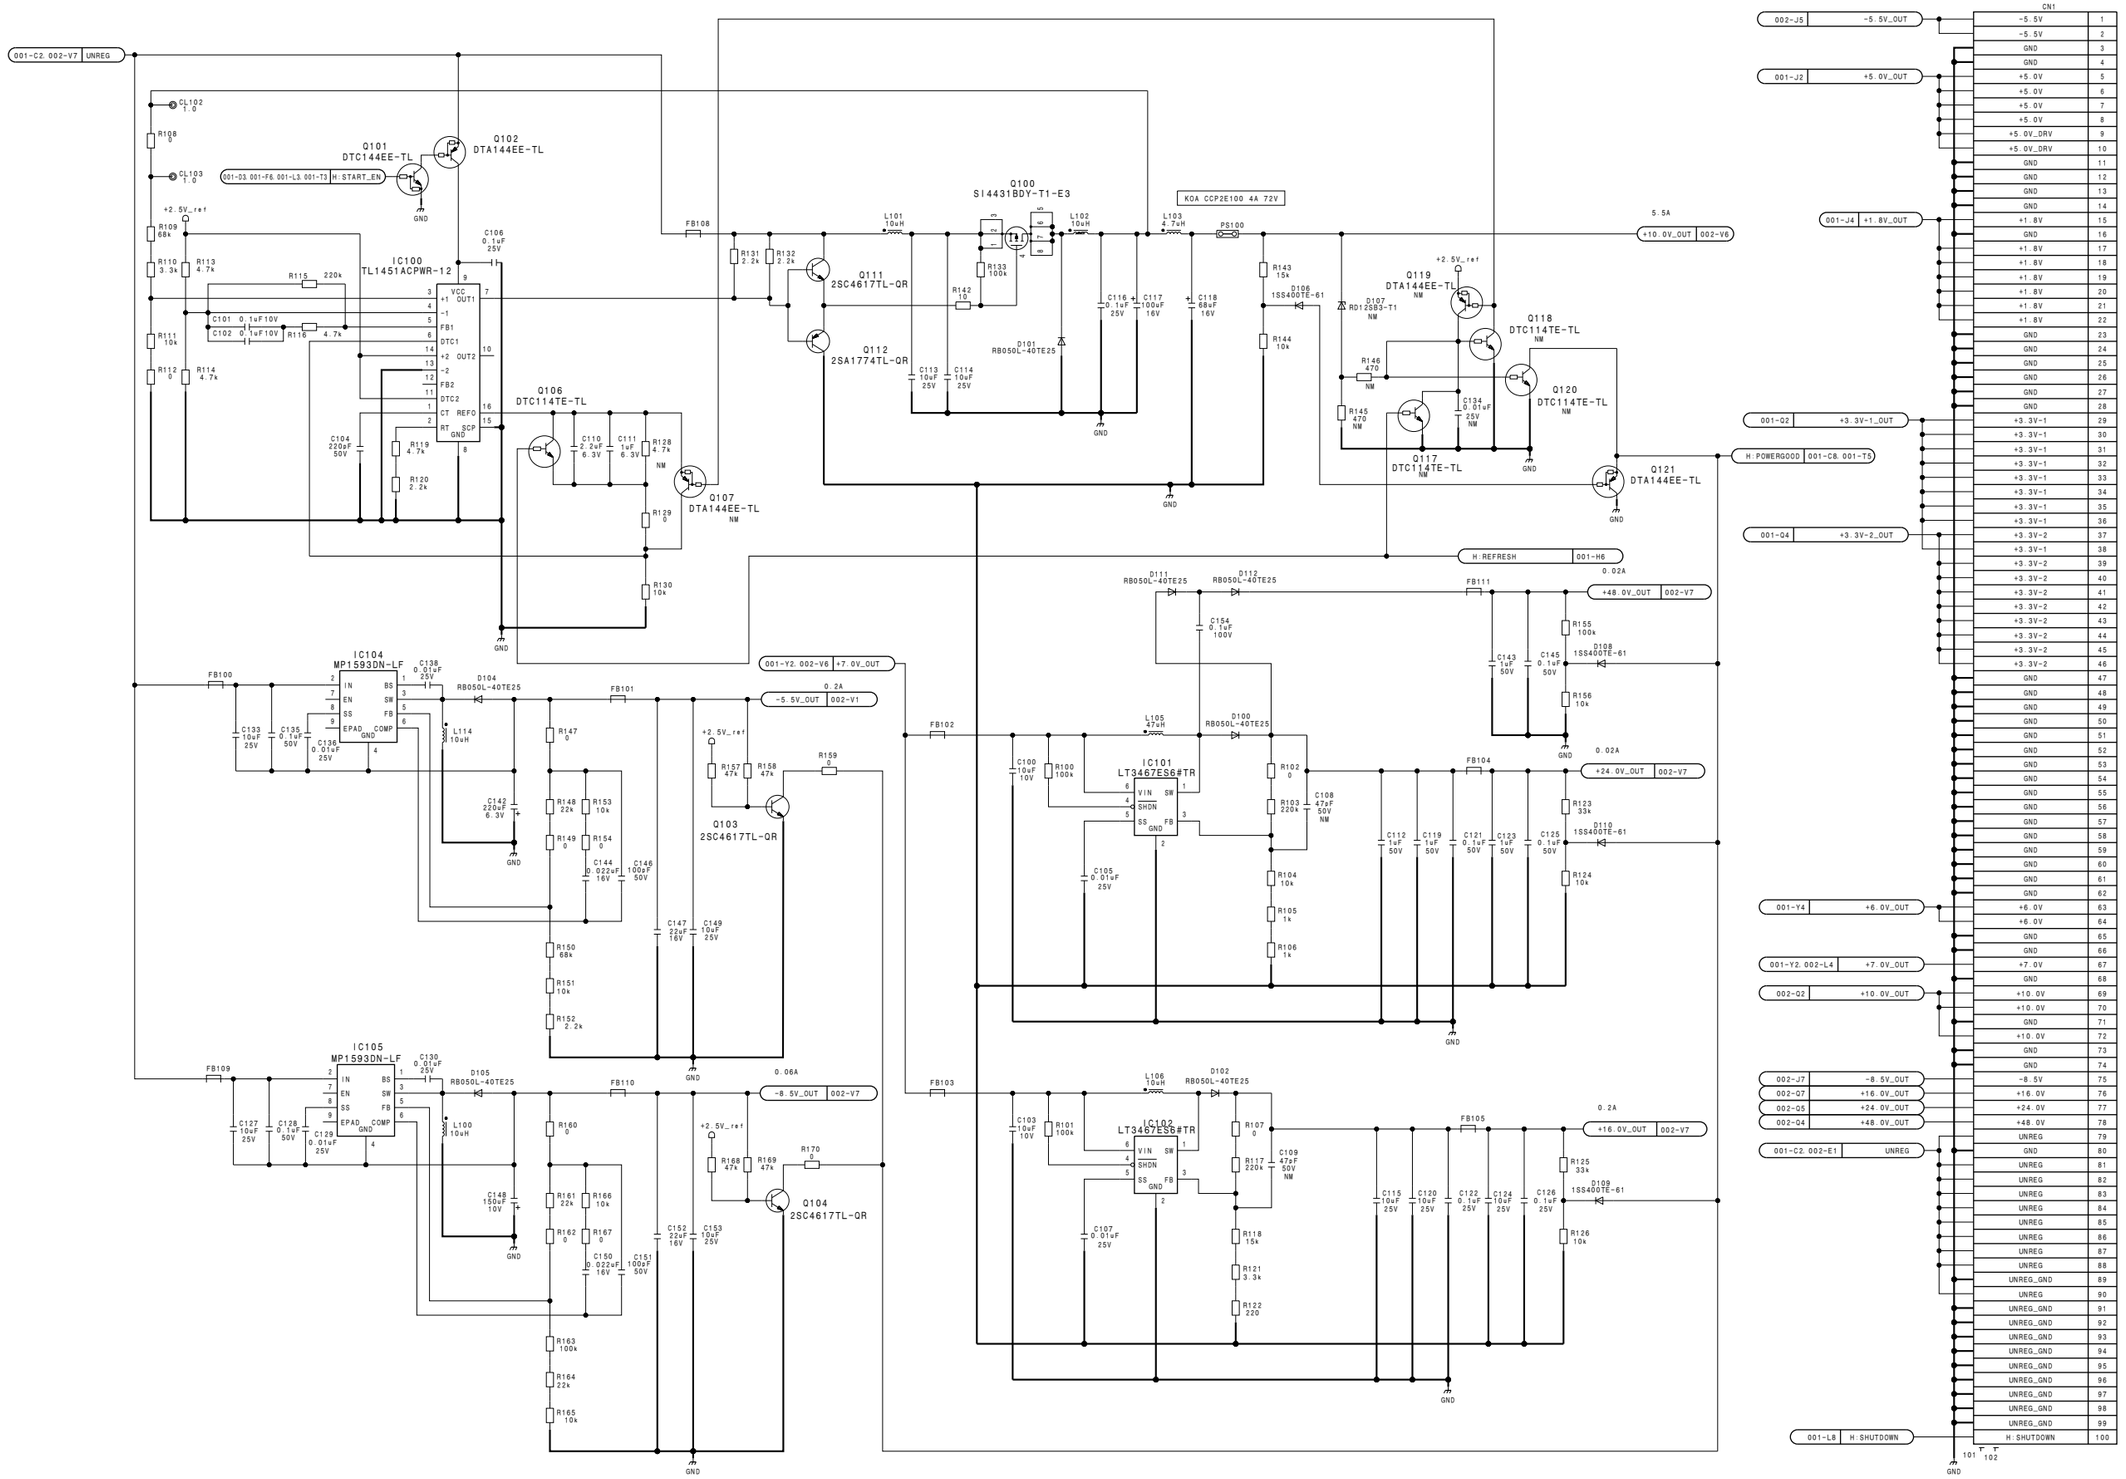

RE-246 (2/2)
BOARD NO. 1-876-869-13
VCX-434_RE-246_12F_2

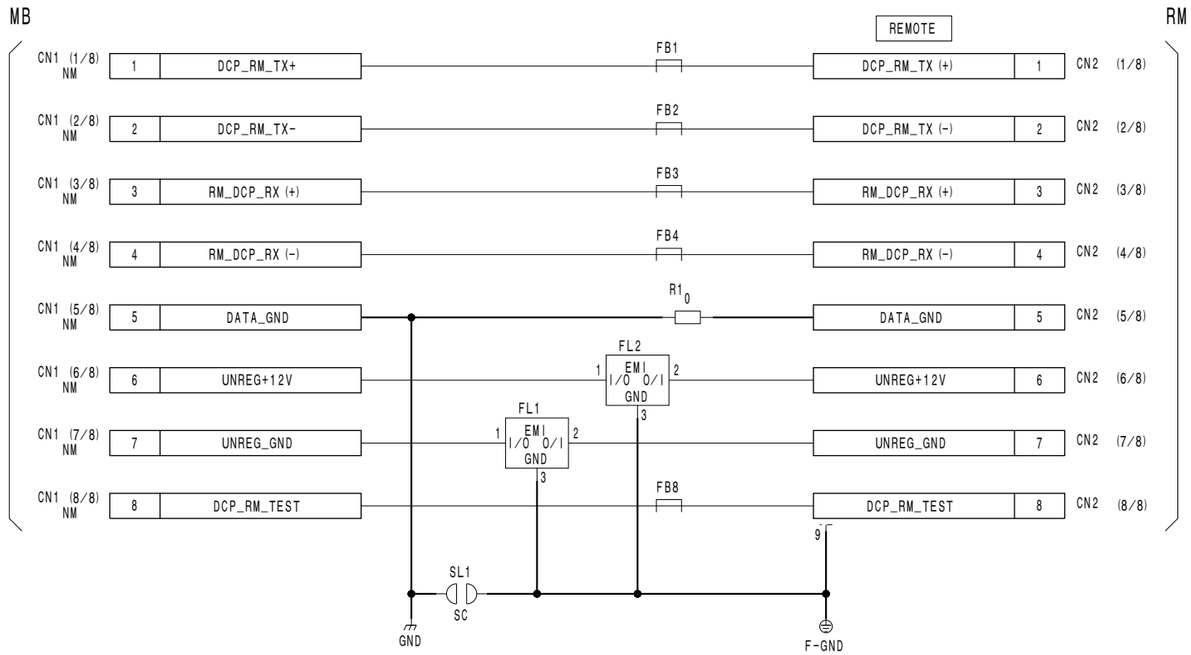

MB
RM
REMOTE
CN1 (1/8) NM
1
DCP_RM_TX+
FB1
DCP_RM_TX (+)
1
CN2 (1/8)
CN1 (2/8) NM
2
DCP_RM_TX-
FB2
DCP_RM_TX (-)
2
CN2 (2/8)
CN1 (3/8) NM
3
RM_DCP_RX (+)
FB3
RM_DCP_RX (+)
3
CN2 (3/8)
CN1 (4/8) NM
4
RM_DCP_RX (-)
FB4
RM_DCP_RX (-)
4
CN2 (4/8)
CN1 (5/8) NM
5
DATA_GND
R1 0
DATA_GND
5
CN2 (5/8)
CN1 (6/8) NM
6
UNREG+12V
FL2
EMI I/O O/I GND
UNREG+12V
6
CN2 (6/8)
CN1 (7/8) NM
7
UNREG_GND
FL1
EMI I/O O/I GND
UNREG_GND
7
CN2 (7/8)
CN1 (8/8) NM
8
DCP_RM_TEST
FB8
DCP_RM_TEST
8
CN2 (8/8)
9
SL1
SC
GND
F-GND

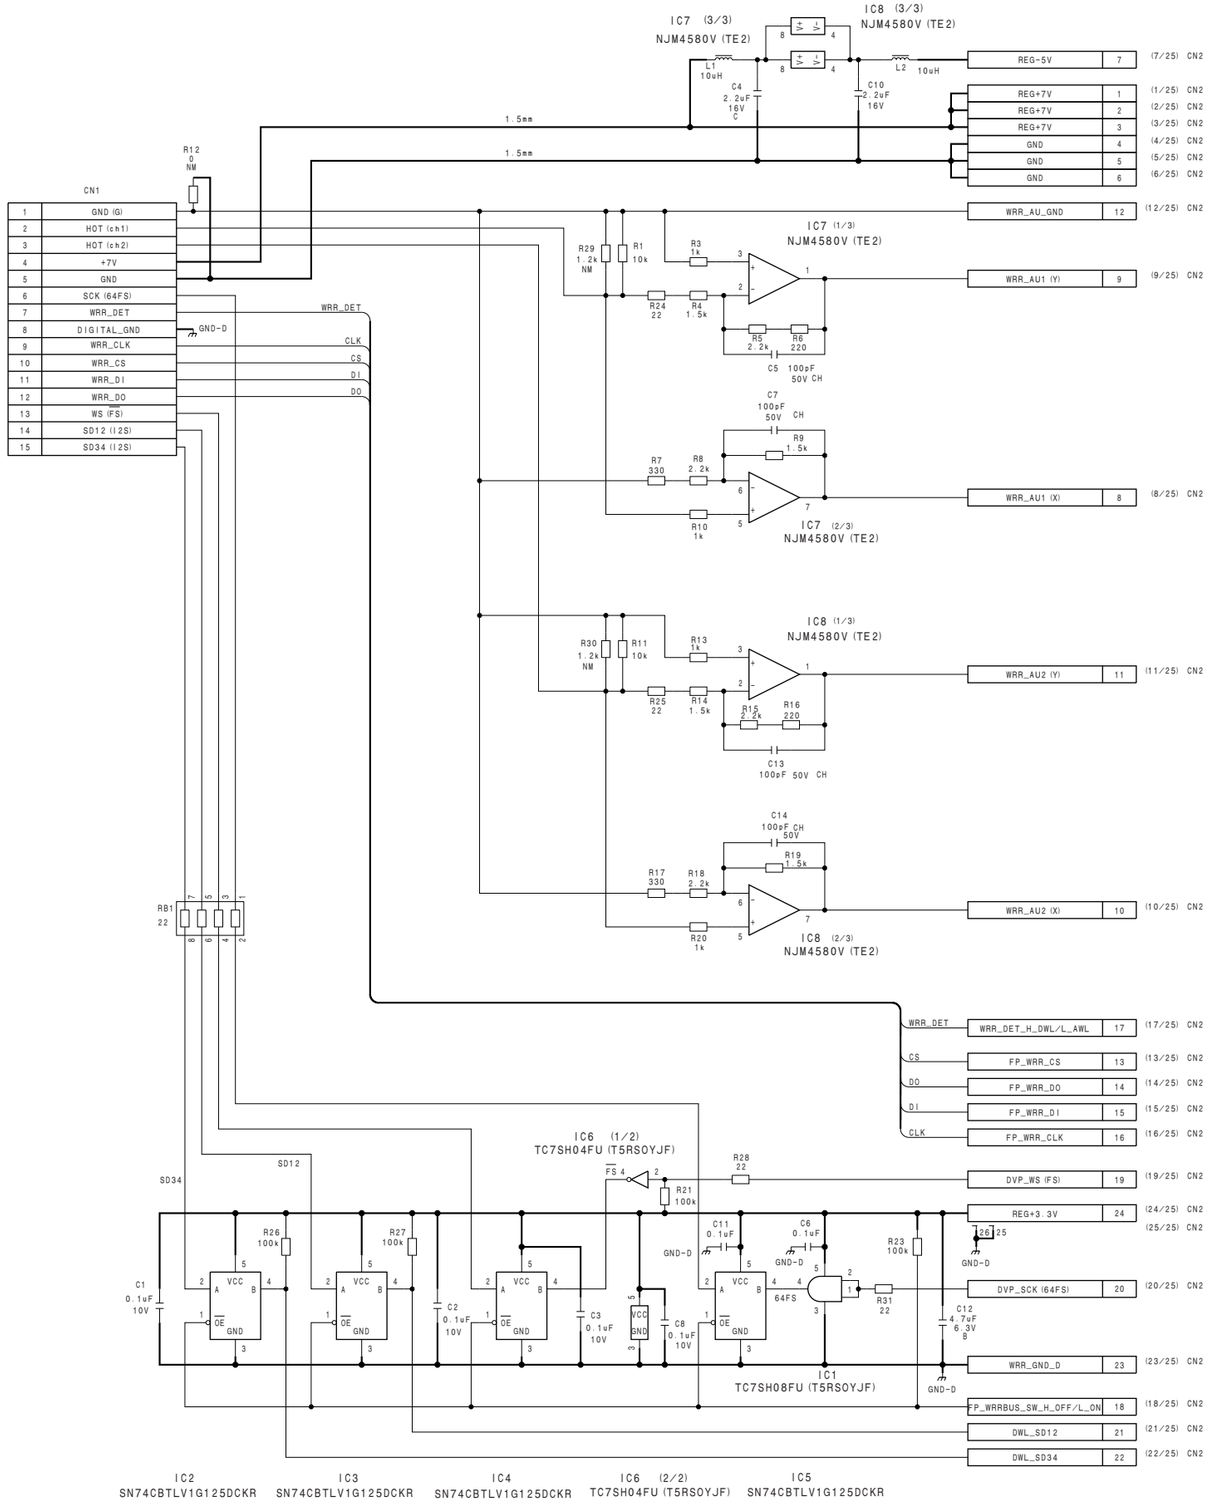

RX-101
BOARD NO. 1-876-844-11
VCX-434_RX-101_111_1

PDW-F800/V2 (J,E)


SE-709, SE-803, SE-857
SUFFIX: -13 SUFFIX: -12 SUFFIX: -11

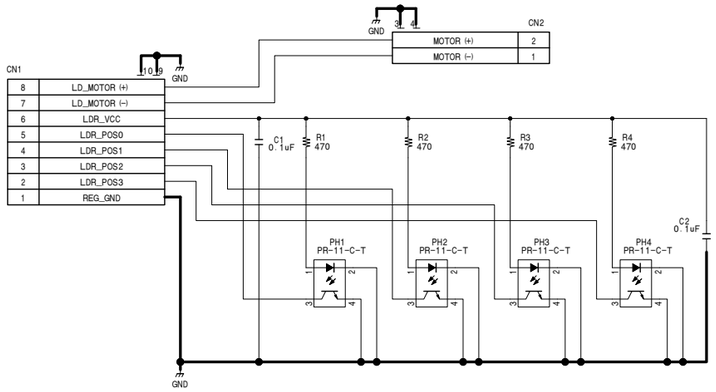

SE-709

BOARD NO. 1-689-979-13

PDW-V1_SE-709_012_1

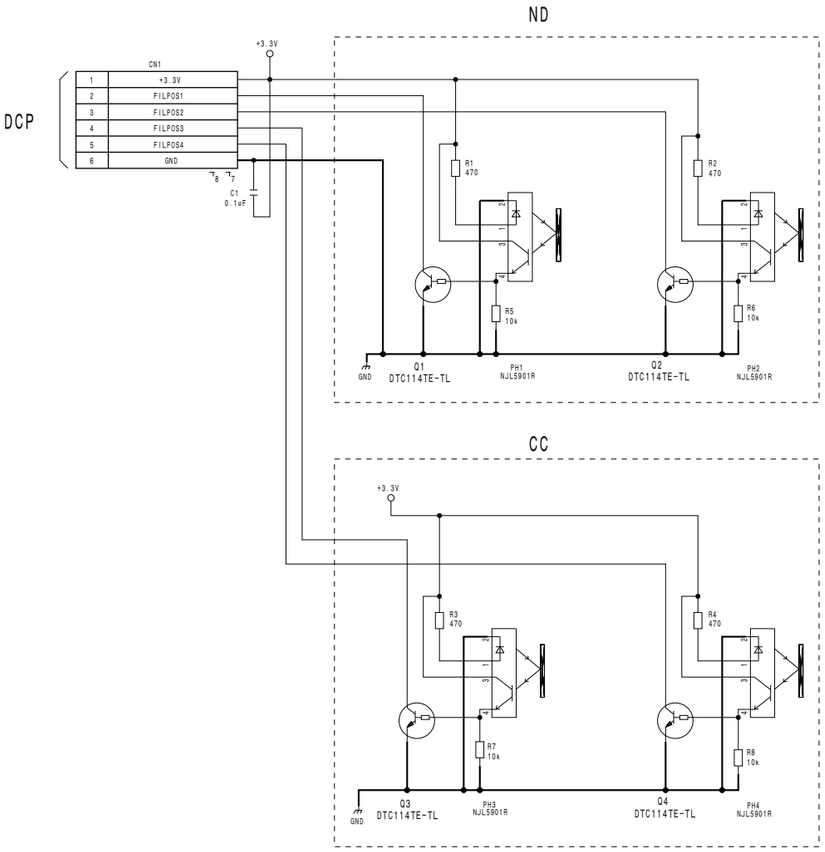


SE-803

BOARD NO. 1-865-555-12

VCX-425_SE-803_121_1

(LDR/SLDO/FANO/GYRO)
(ACC/EEPROM/SW/PH)

DR-606

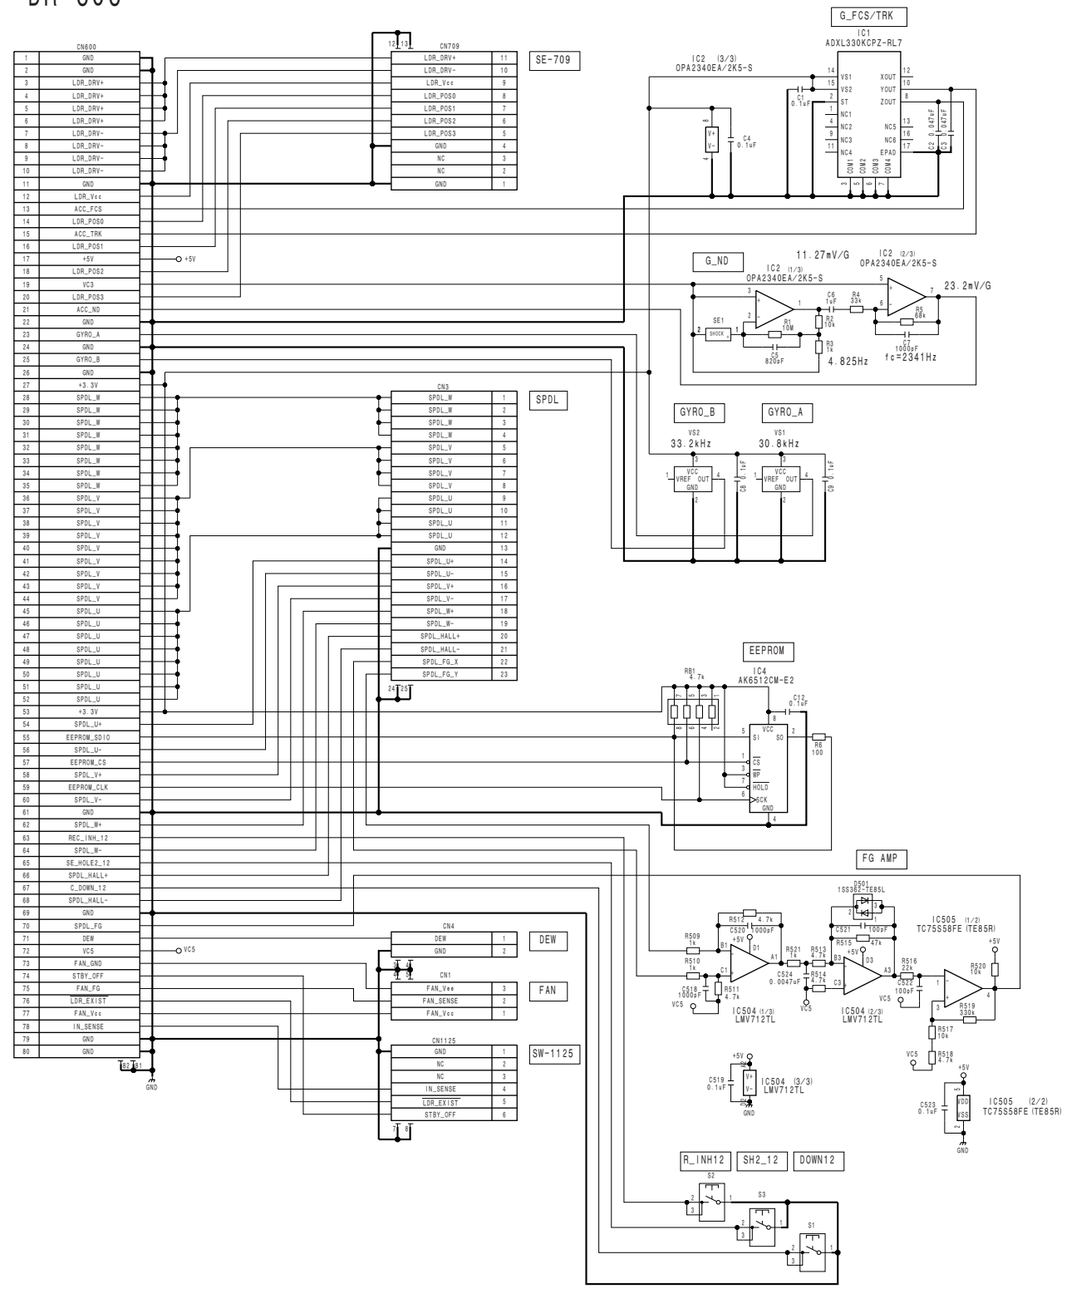


SE-857

BOARD NO. 1-875-399-11


BRD-P100P200_SE-857_011_1

SE-858, SW-1125G
SUFFIX: -11 SUFFIX: -21

DR-606 (KY/SLD/SW/PH)

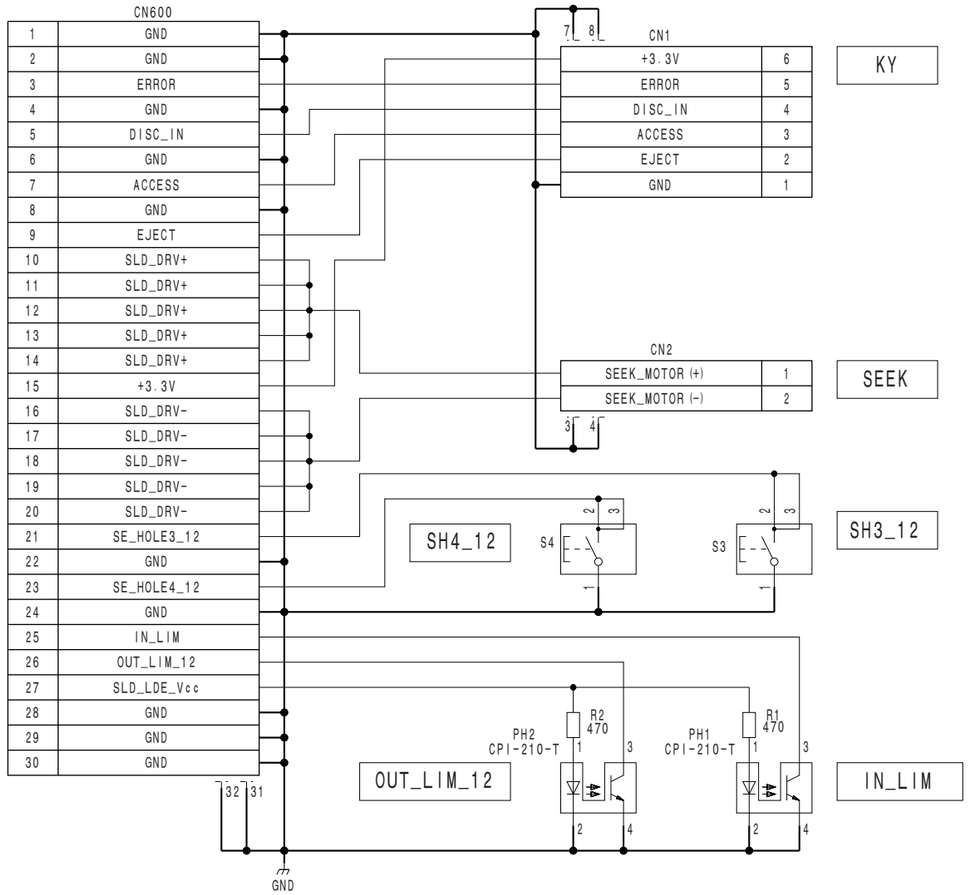


SE-858
BOARD NO. 1-875-400-11
BRD-P100P200_SE-858_011_1

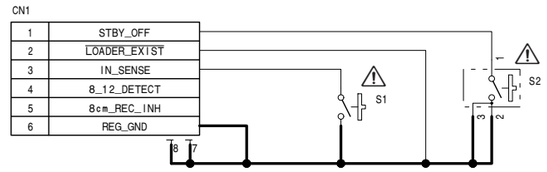

SW-1125G
BOARD NO. 1-689-980-21
PDW-V1_SW-1125_012_1


SW-1249, SW-1352, SW-1385
SUFFIX: -11 SUFFIX: -11 SUFFIX: -11

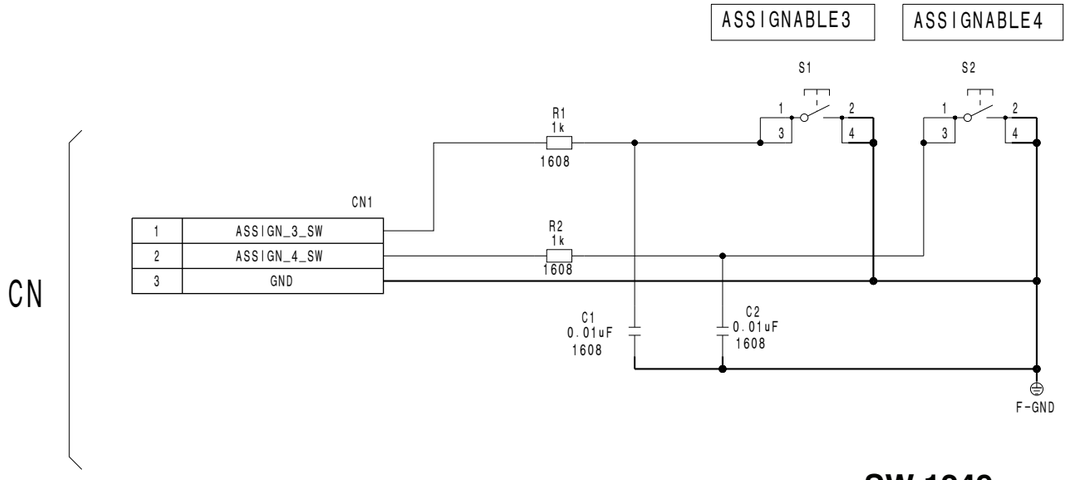

SW-1249

BOARD NO. 1-869-505-11


VCX-434_SW-1249_002_1

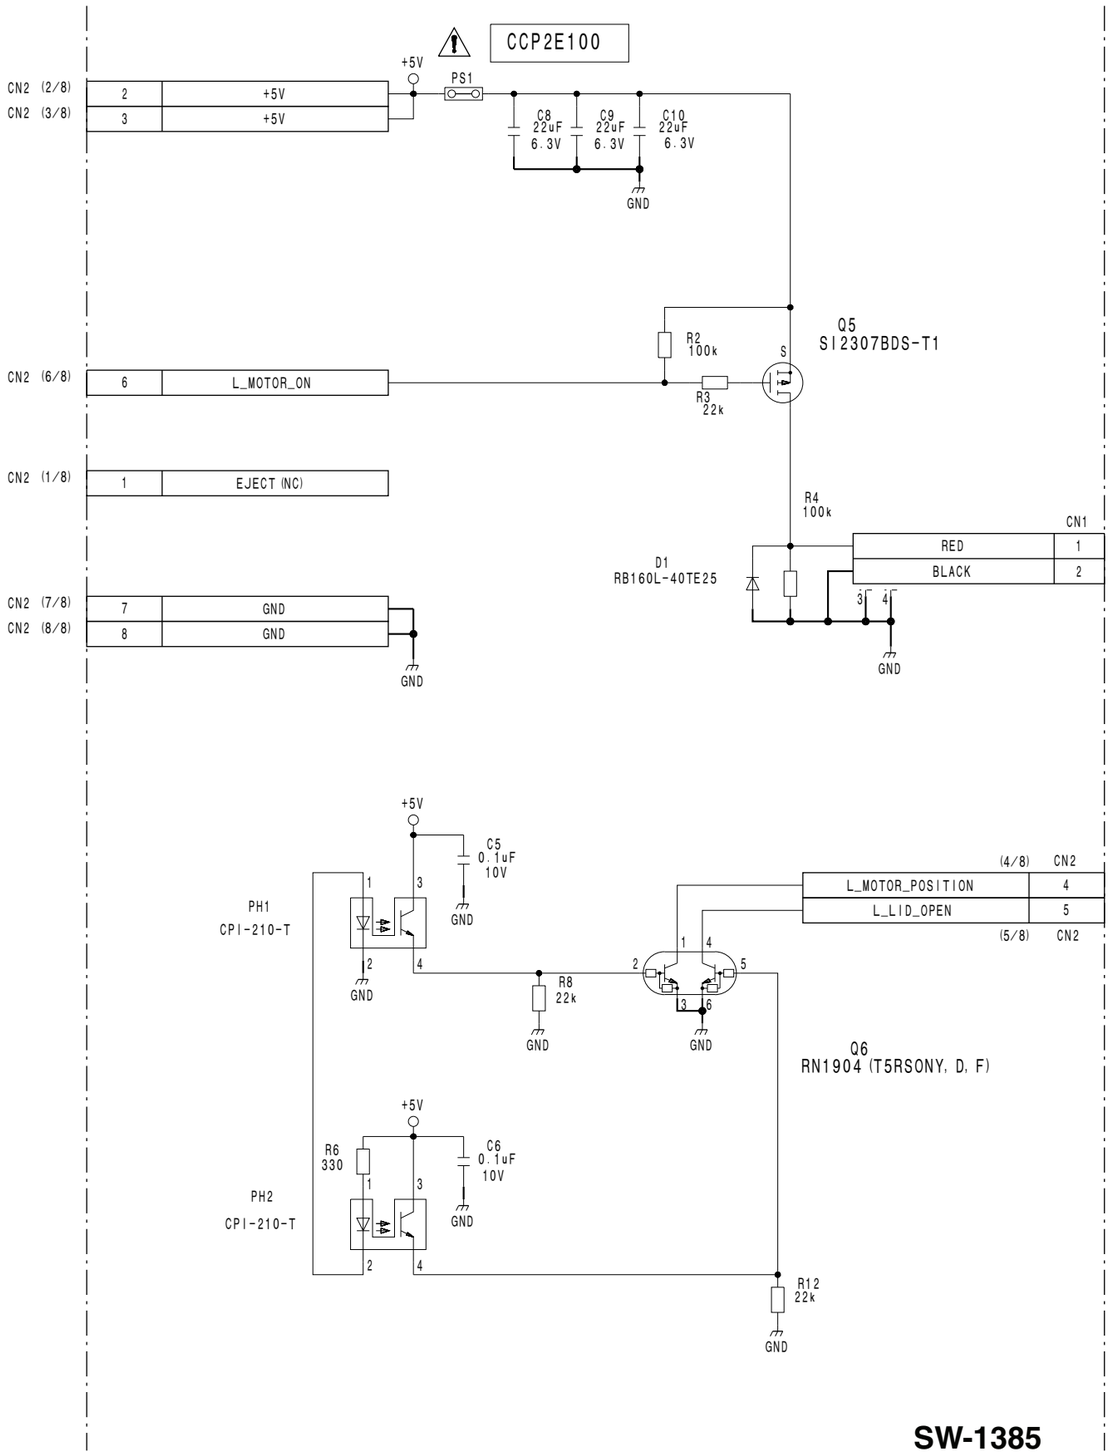

SW-1385

BOARD NO. 1-874-821-11

VCX-434_SW-1385_002_1

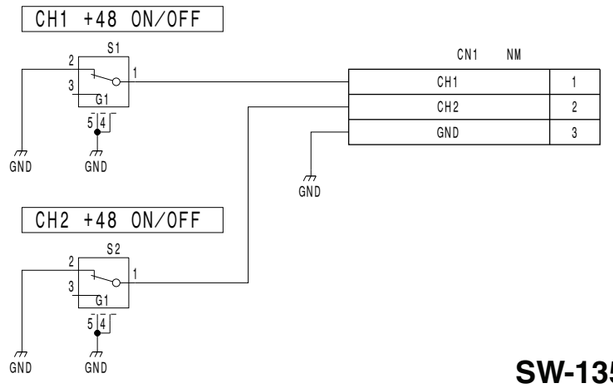


SW-1352

BOARD NO. 1-876-833-11

VCX-434_SW-1352_011_1


SW-1391, SW-1425, SW-1426
SUFFIX: -11 SUFFIX: -11 SUFFIX: -11

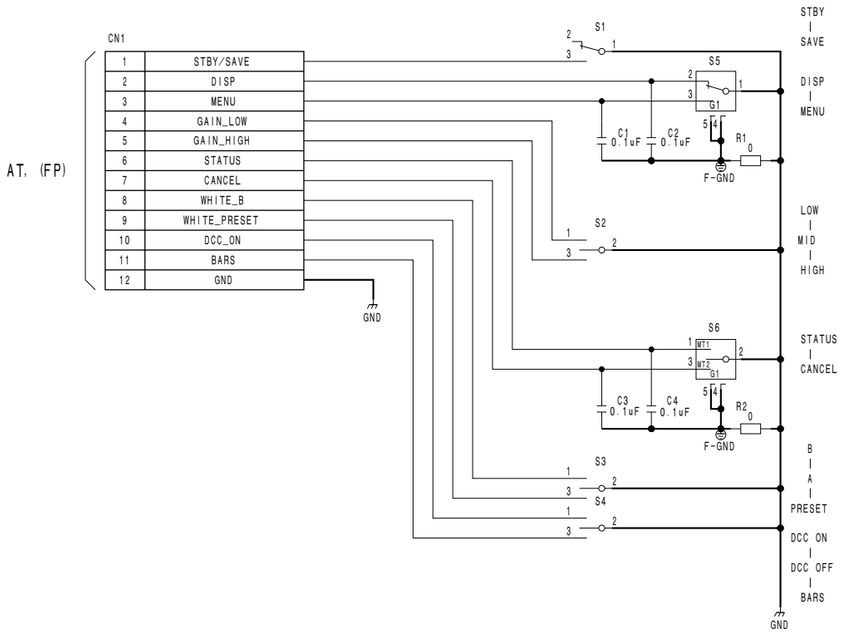

SW-1391

BOARD NO. 1-876-852-11


VCX-434_SW-1391_011_1

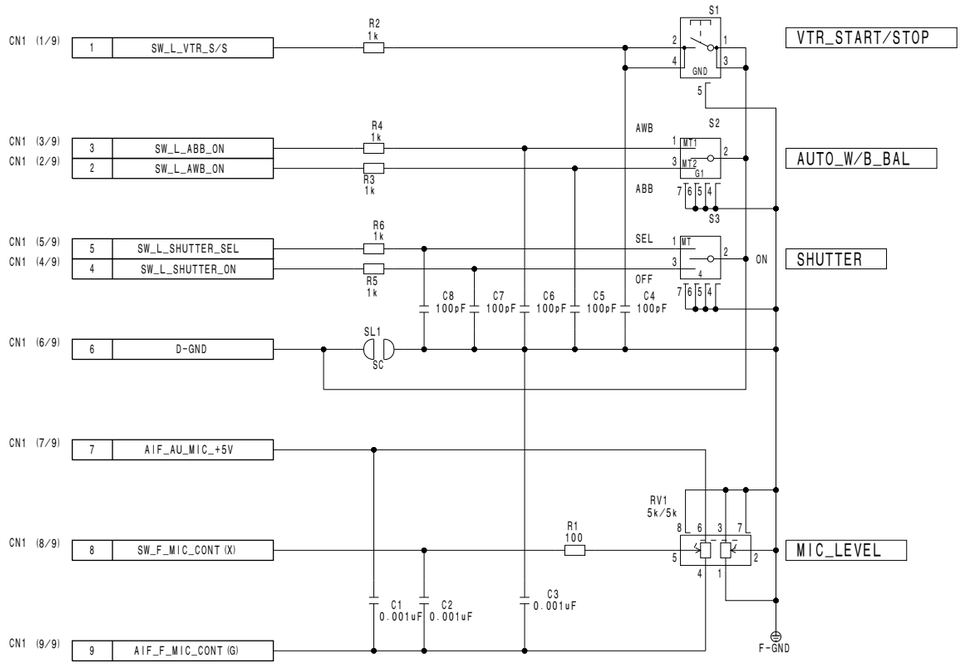

SW-1425

BOARD NO. 1-876-939-11

VCX-434_SW-1425_111_1

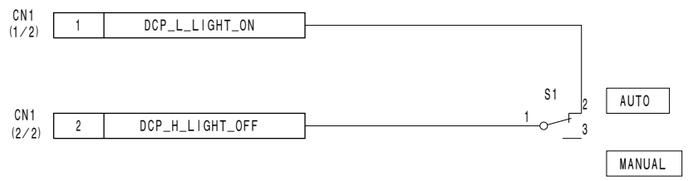


SW-1426

BOARD NO. 1-876-967-11


VCX-434_SW-1426_111_1

SY-355 (1/16)
SUFFIX: -12

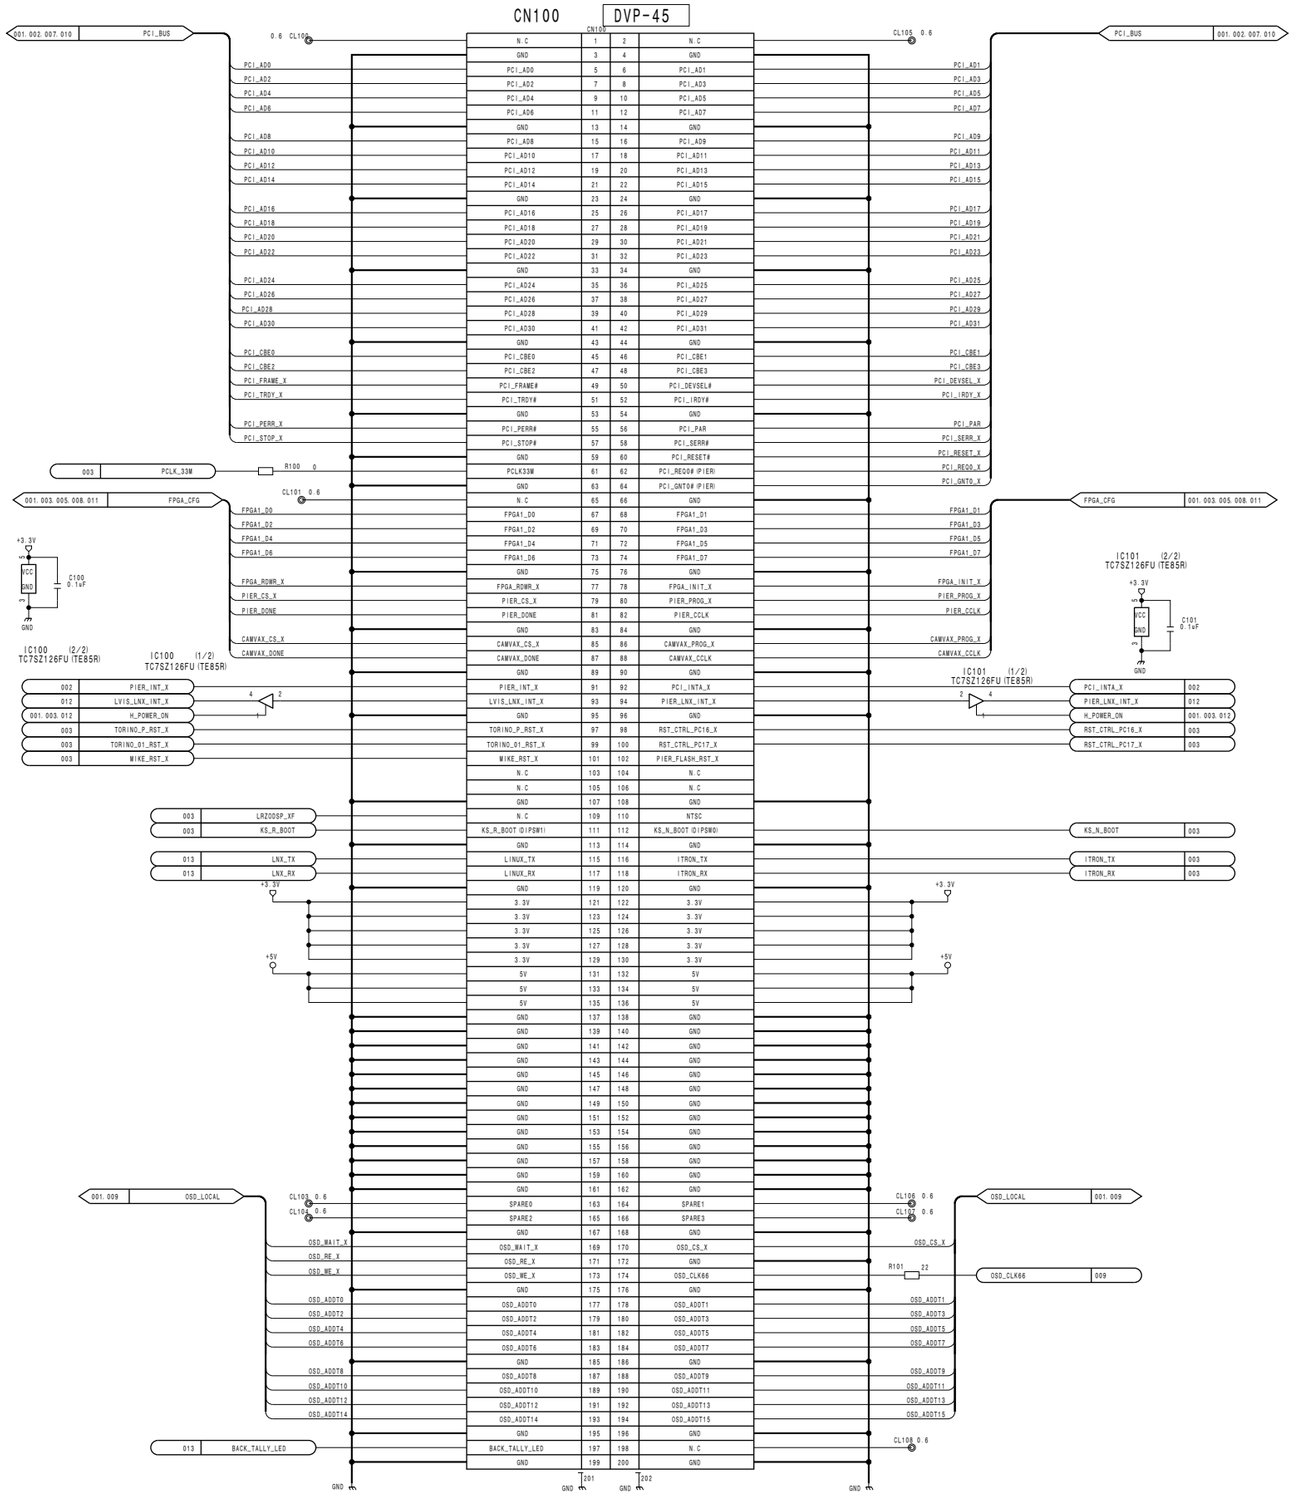


SY-355 (1/16)
BOARD NO. 1-876-836-12
PDW-700_SY-355_012_1

SY-355 (2/16)
SUFFIX: -12

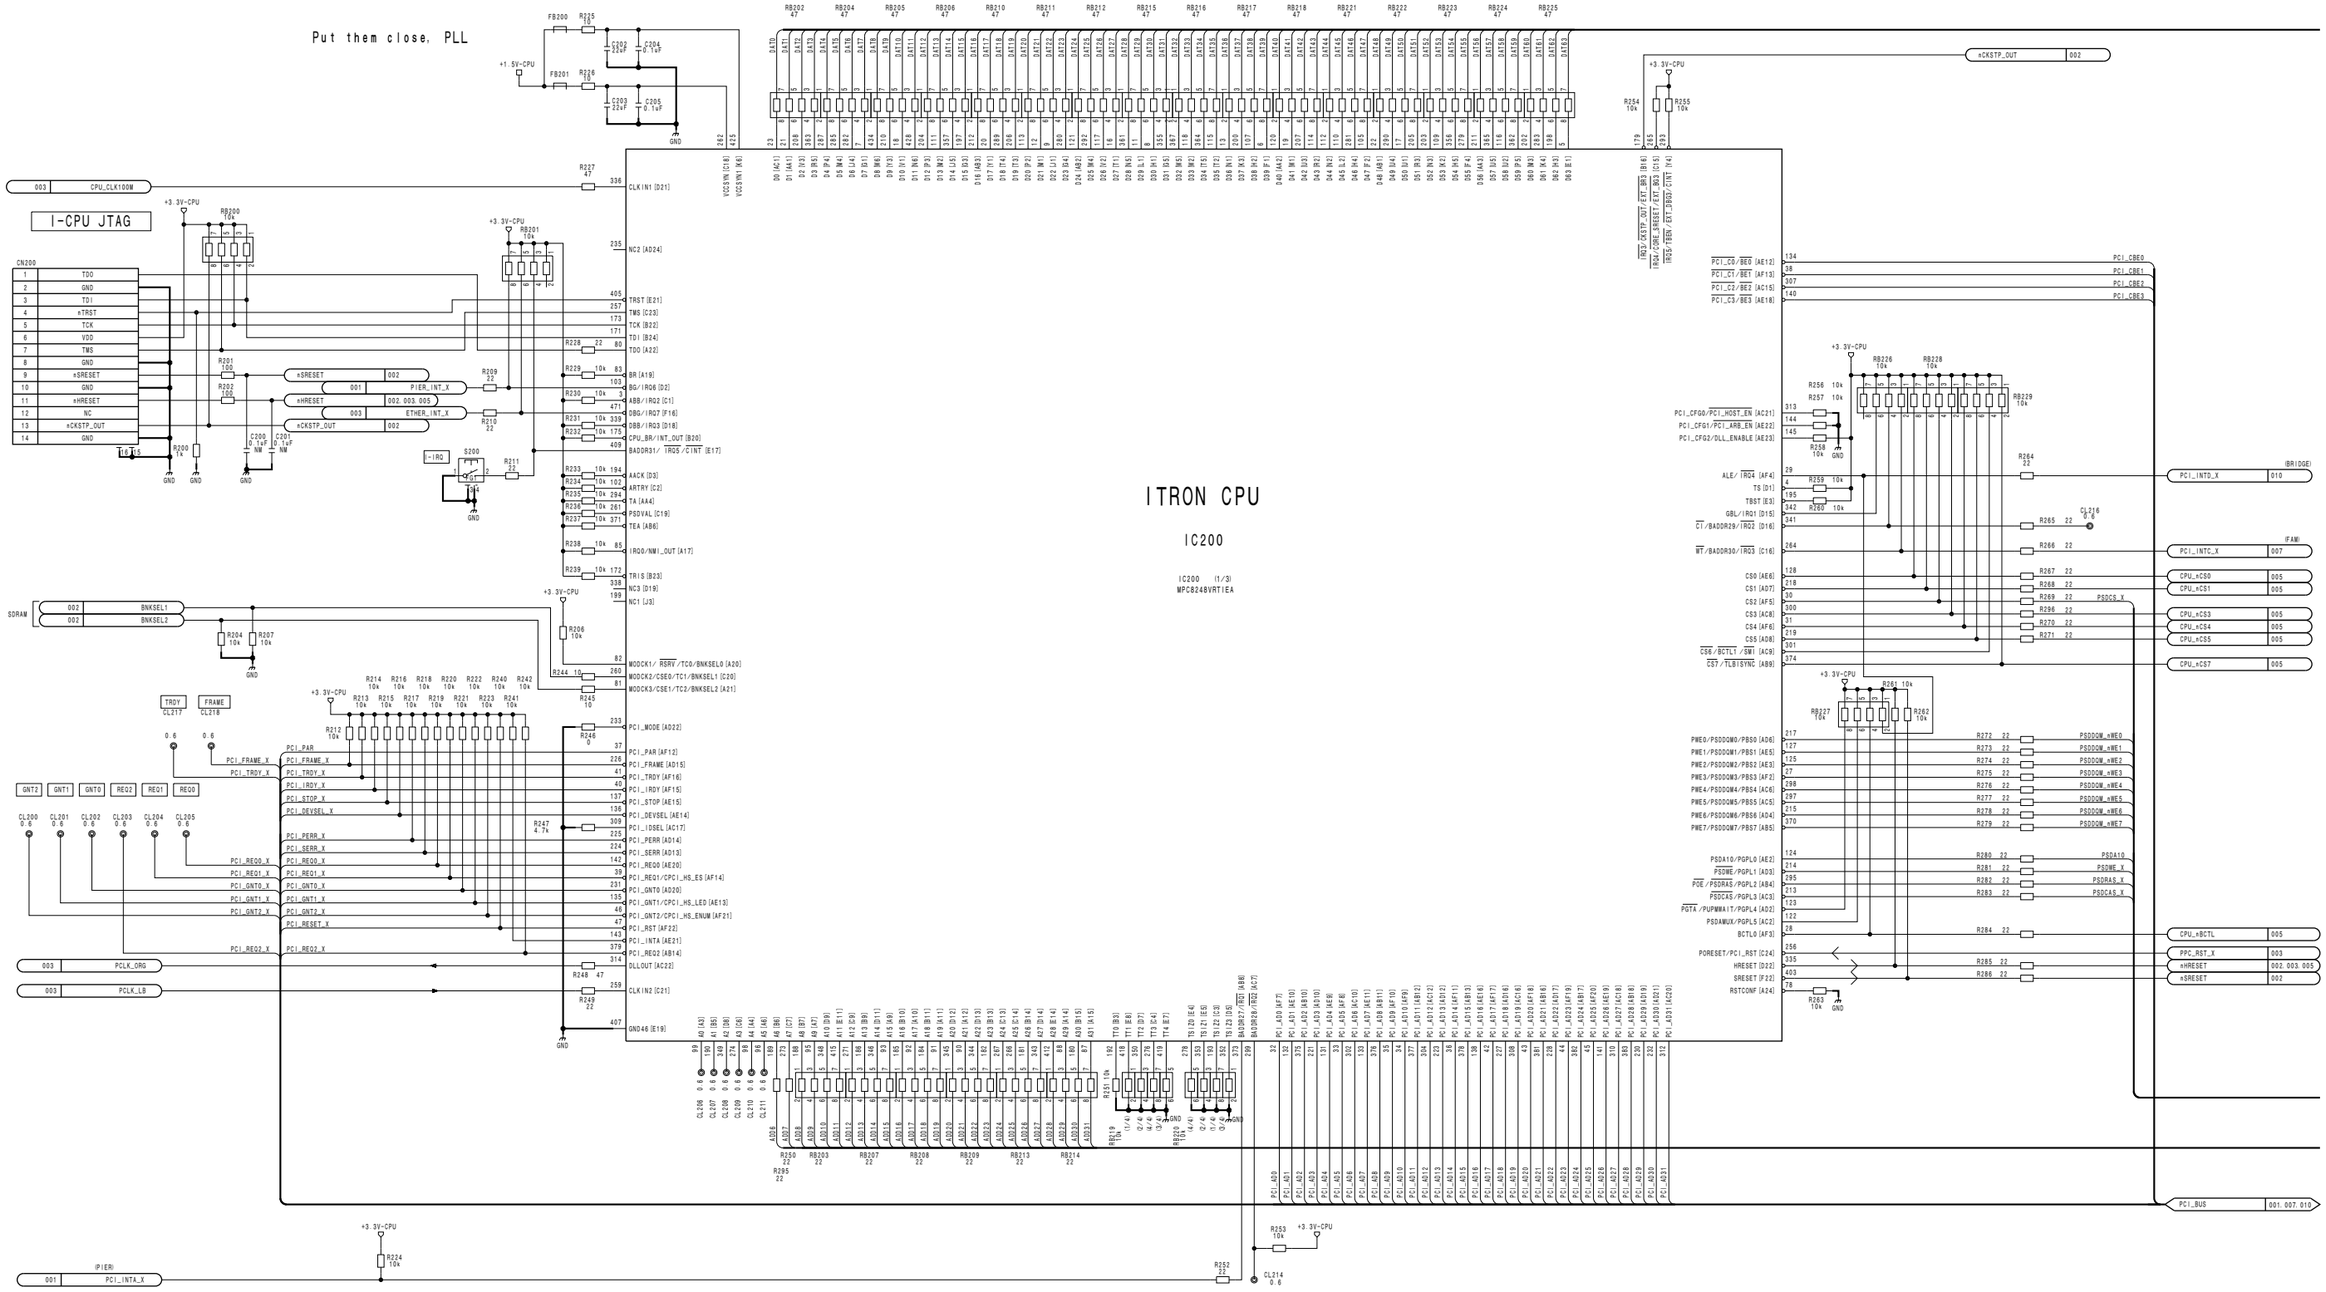

3-108

SY-355 (2/16)
SUFFIX: -12

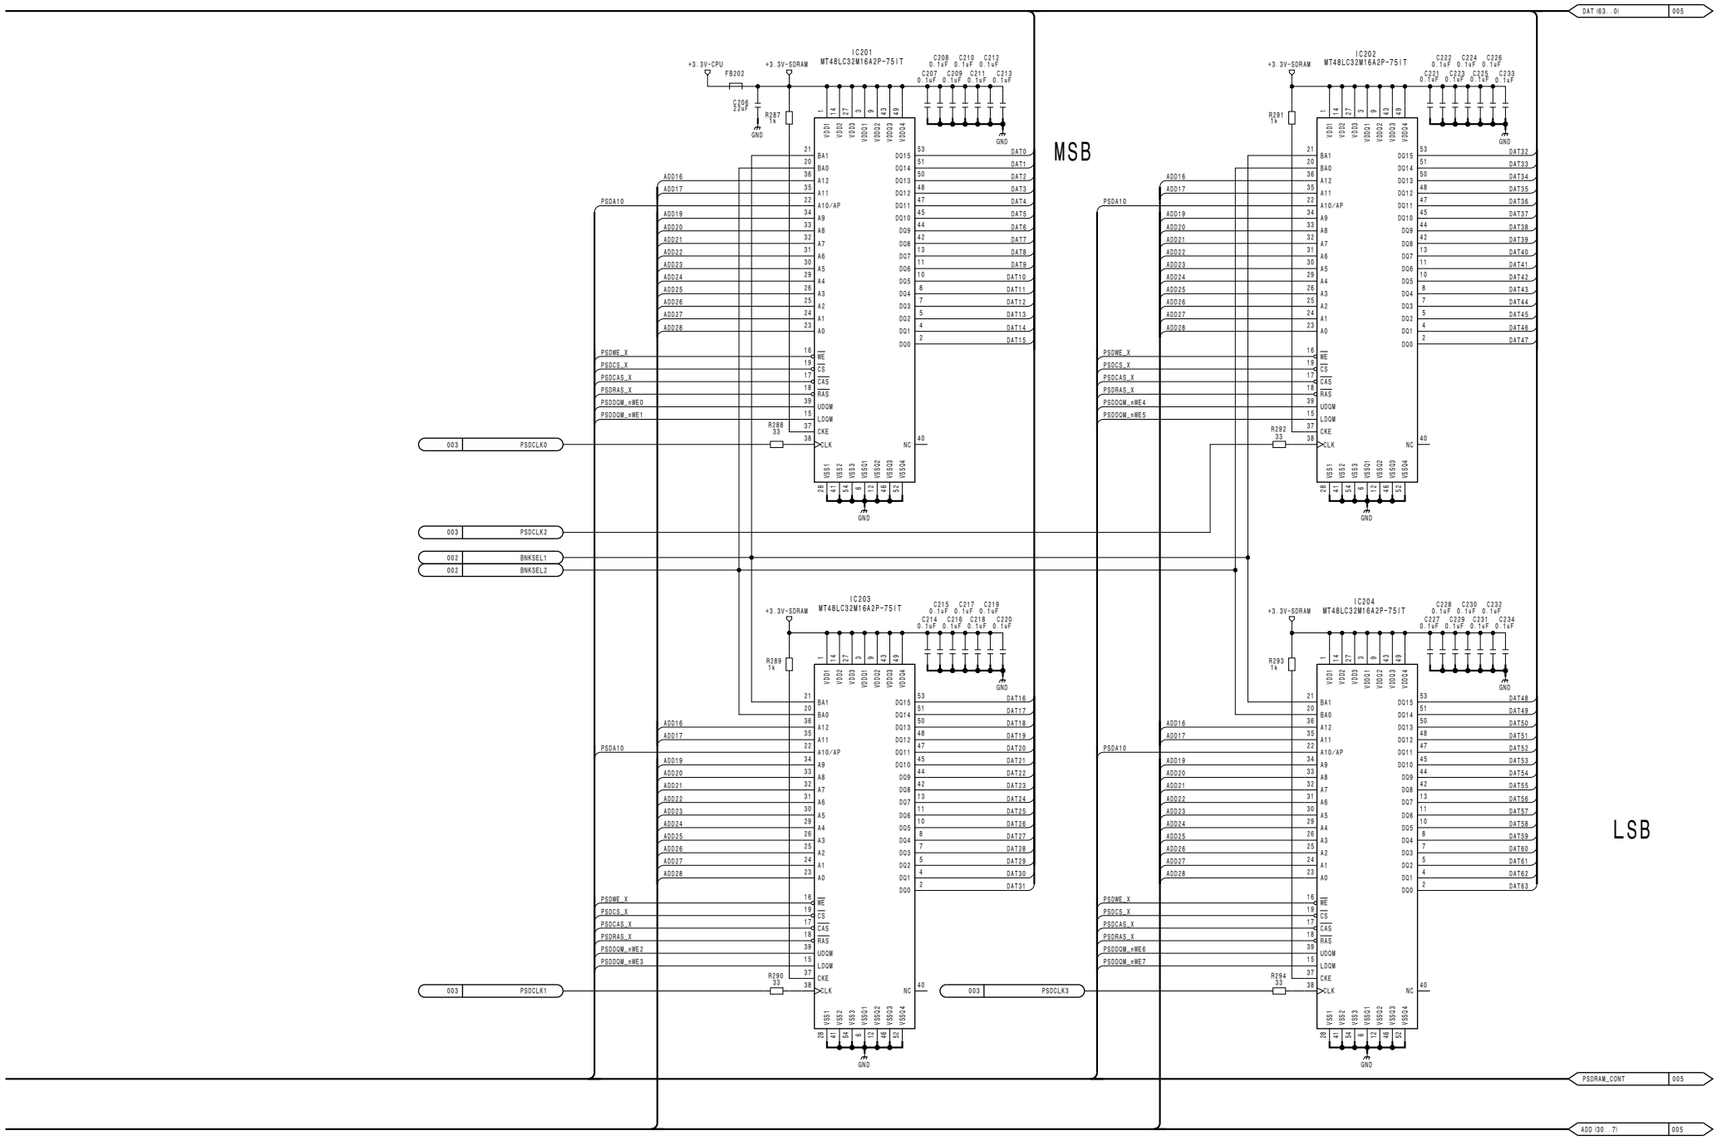

3-109


SY-355 (3/16) **SUFFIX: -12**

CN200
ITRON CPU
IC200 (2/3)
MPC8248VRTIEA

CN300
DEBUG ITRON


3-110


SY-355 (3/16)
SUFFIX: -12

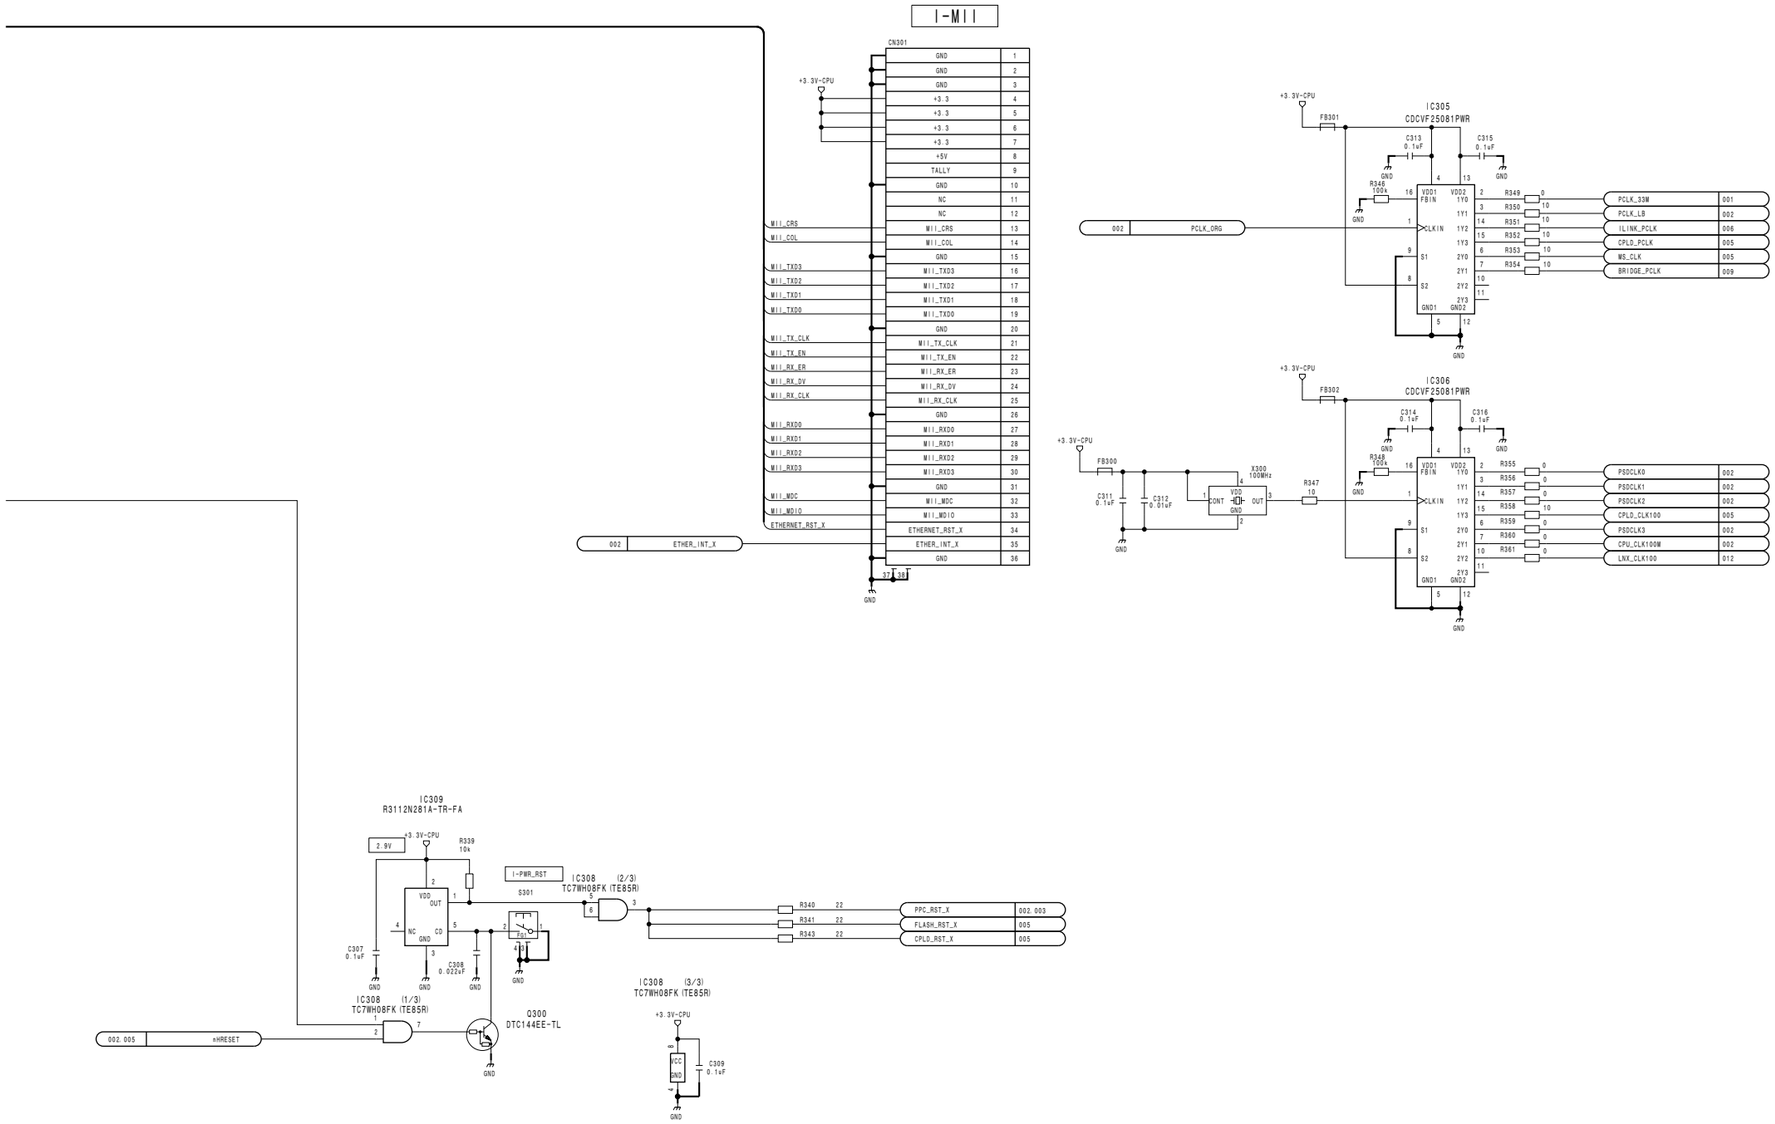


SY-355 (3/16)
BOARD NO. 1-876-836-12
PDW-700_SY-355_012_3

SY-355 (4/16)
SUFFIX: -12

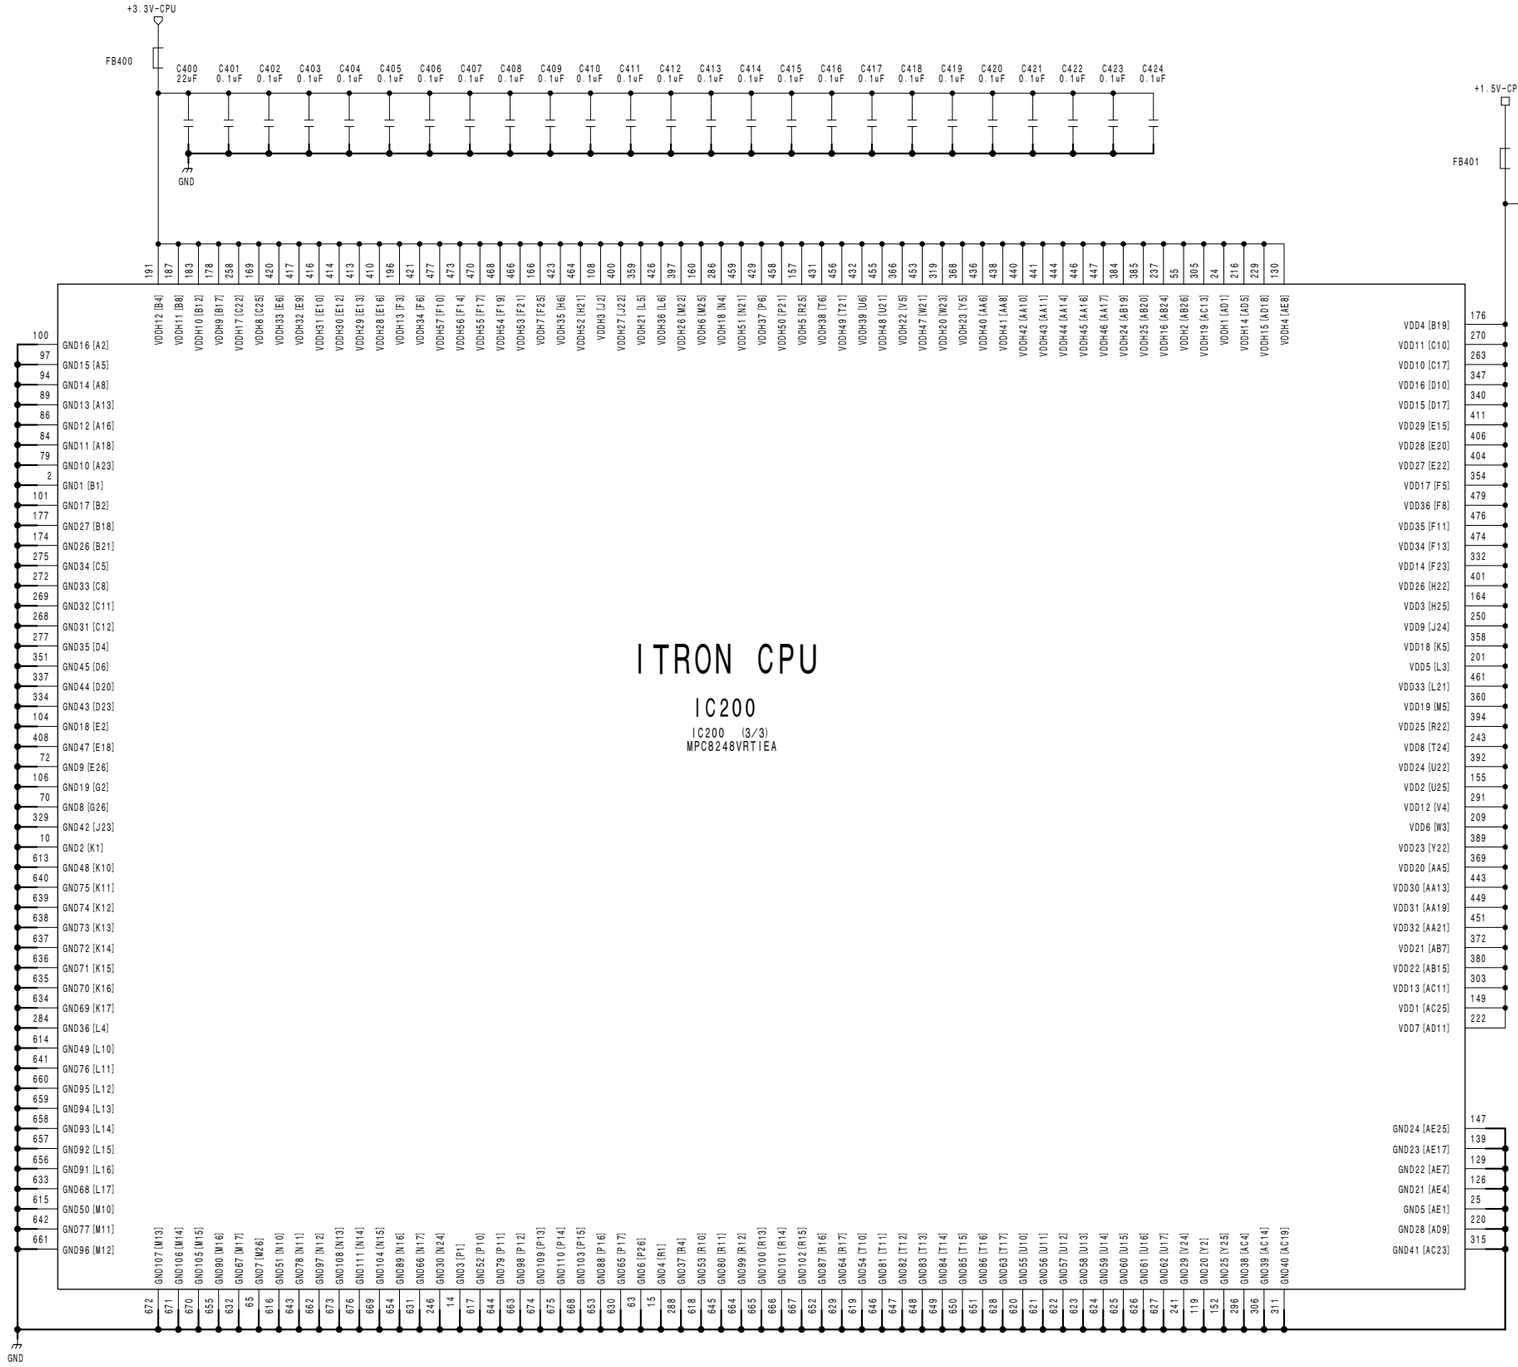


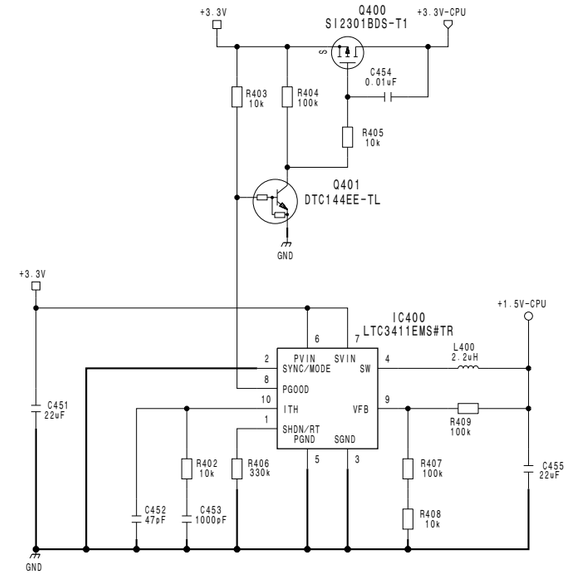

iTRON CPU +1.5V




SY-355 (5/16)
SUFFIX: -12

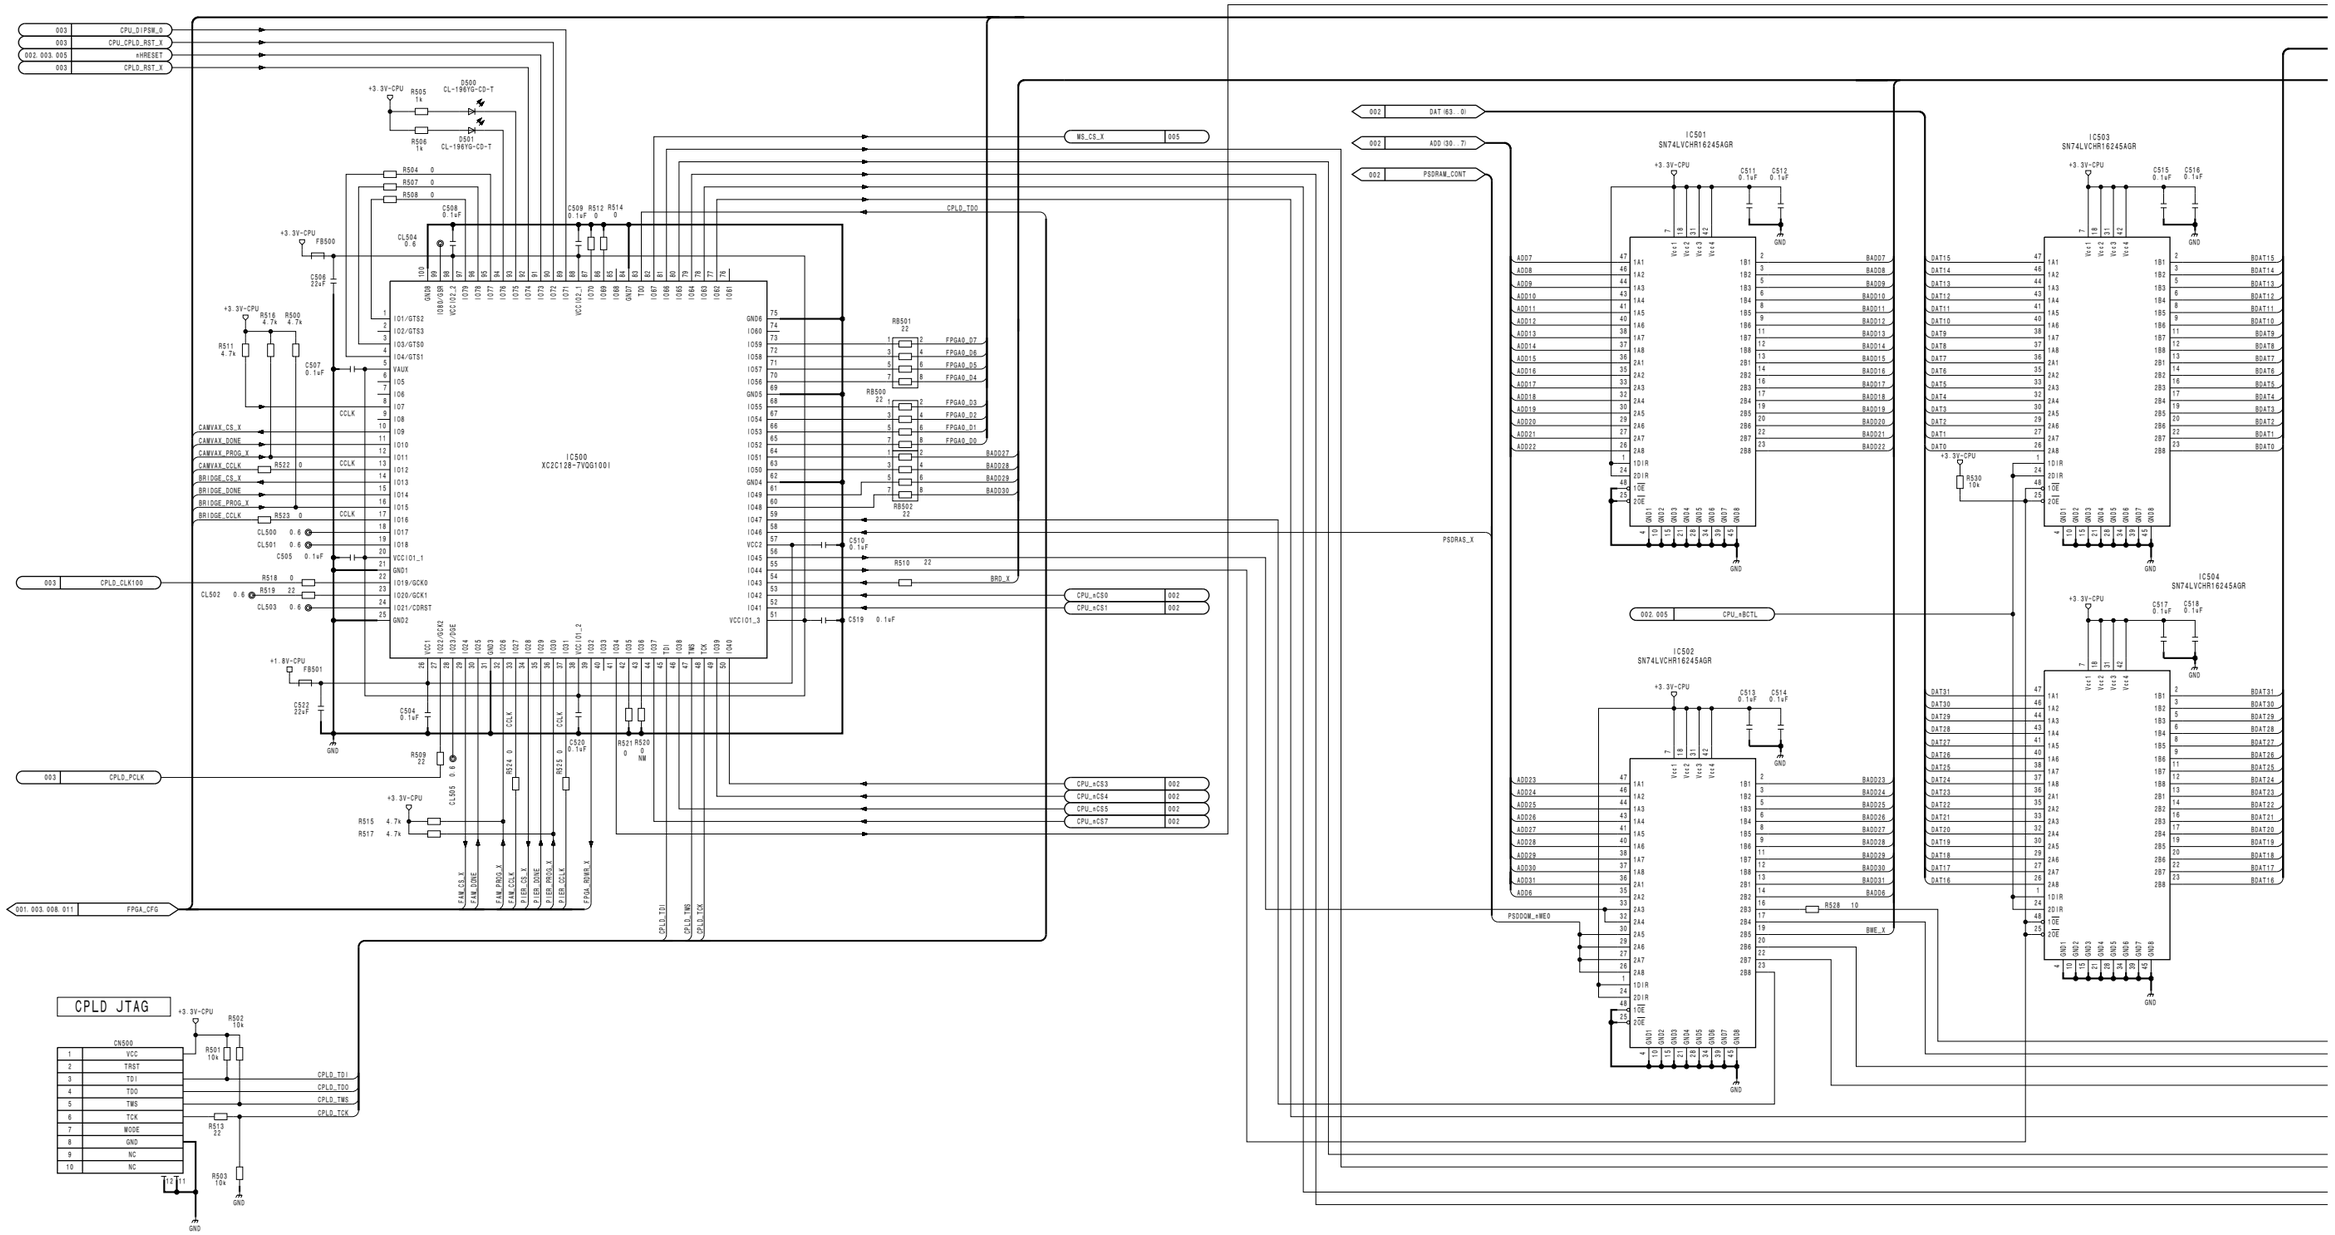


3-114

SY-355 (5/16)
SUFFIX: -12

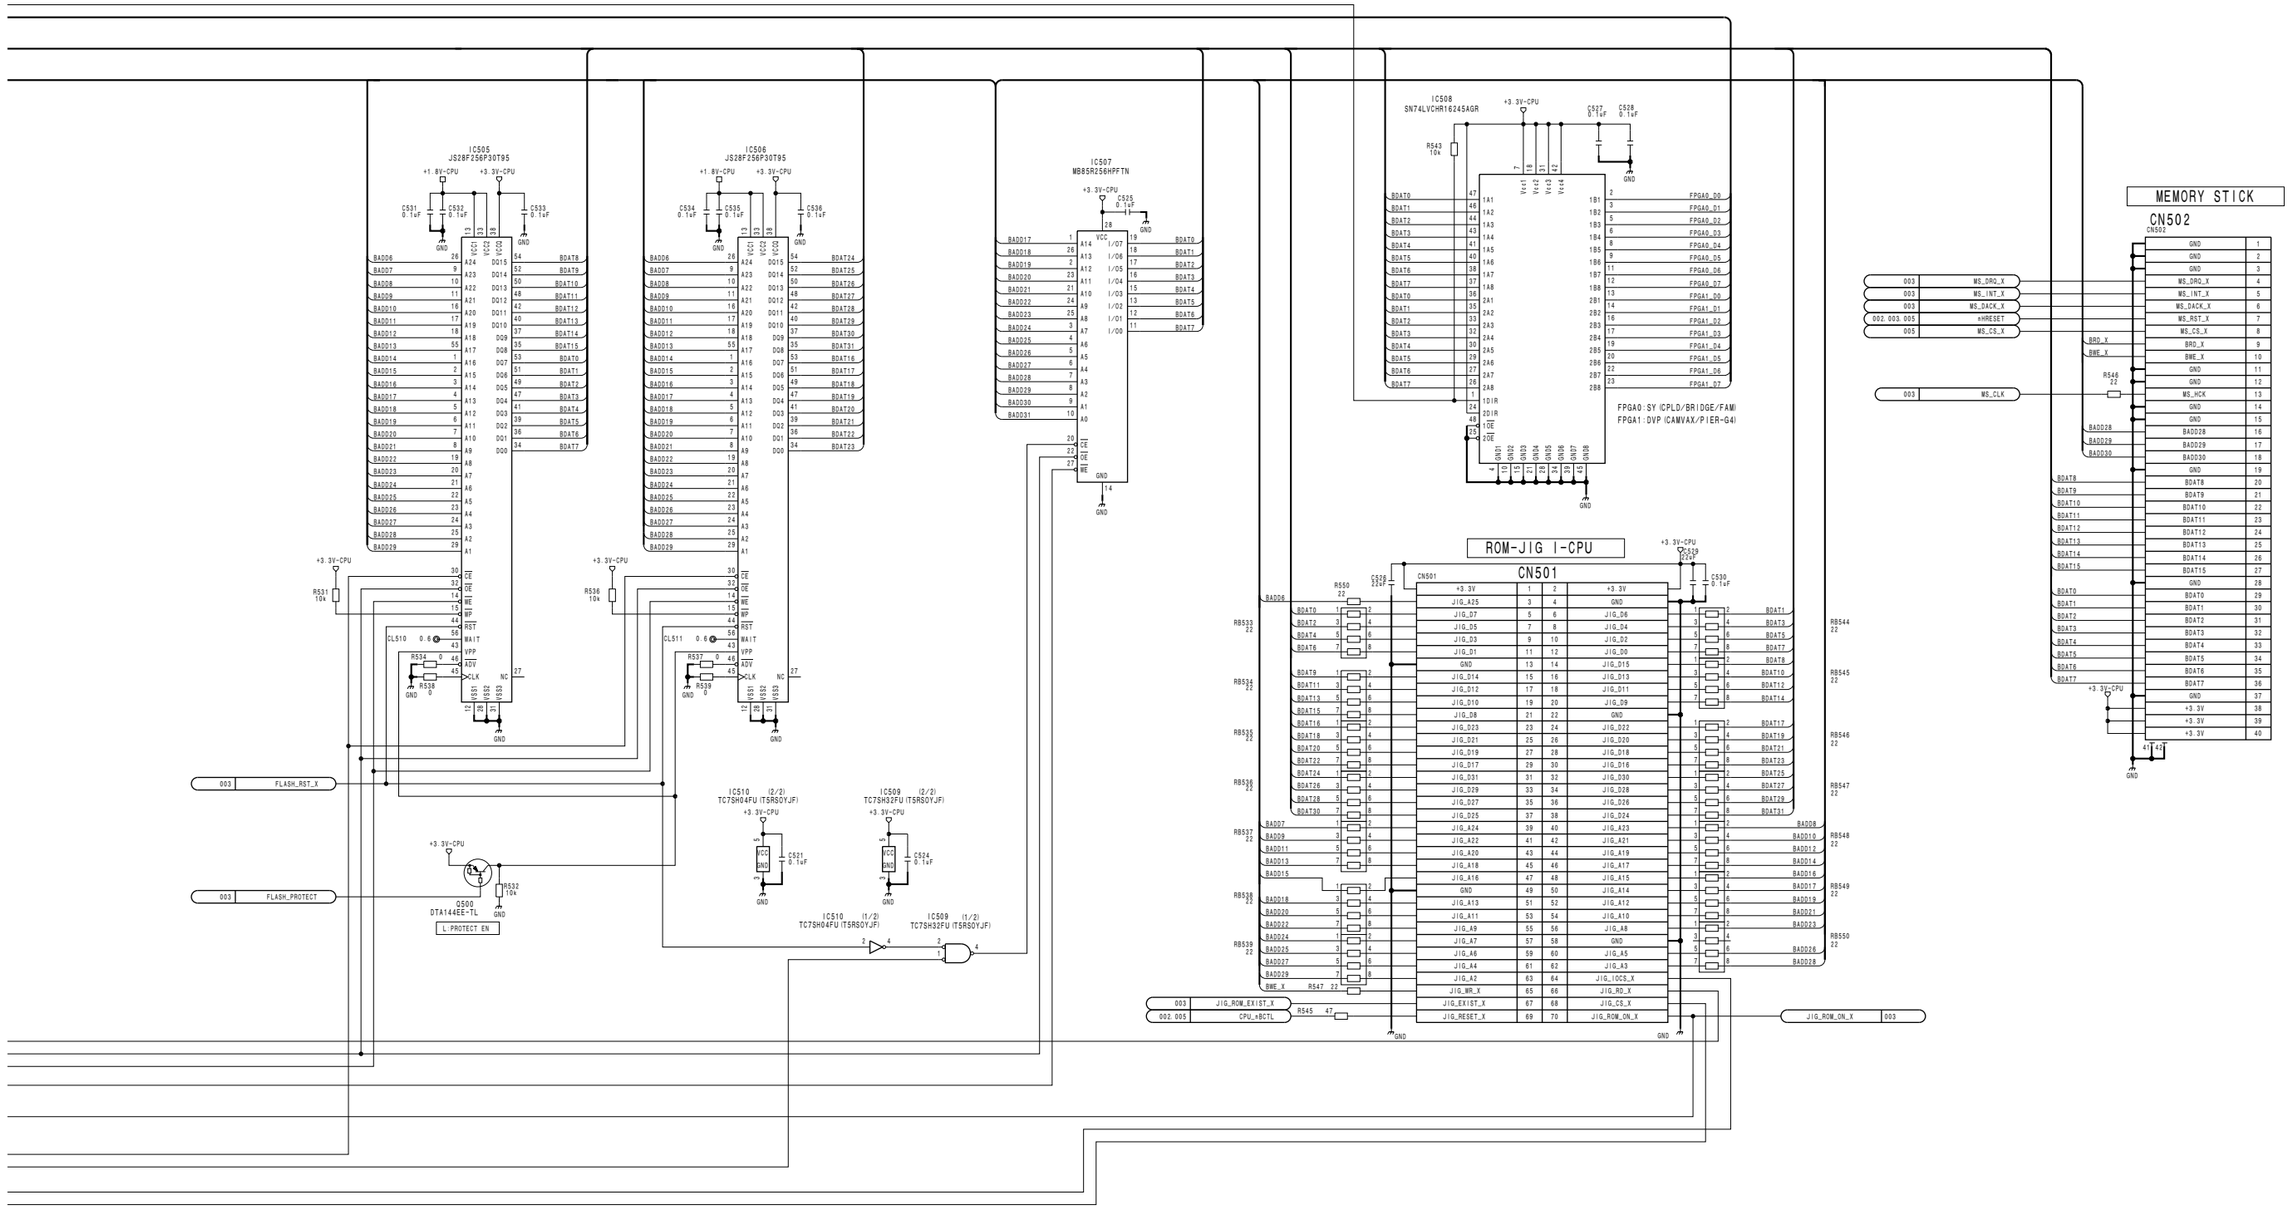

SY-355 (6/16)
SUFFIX: -12

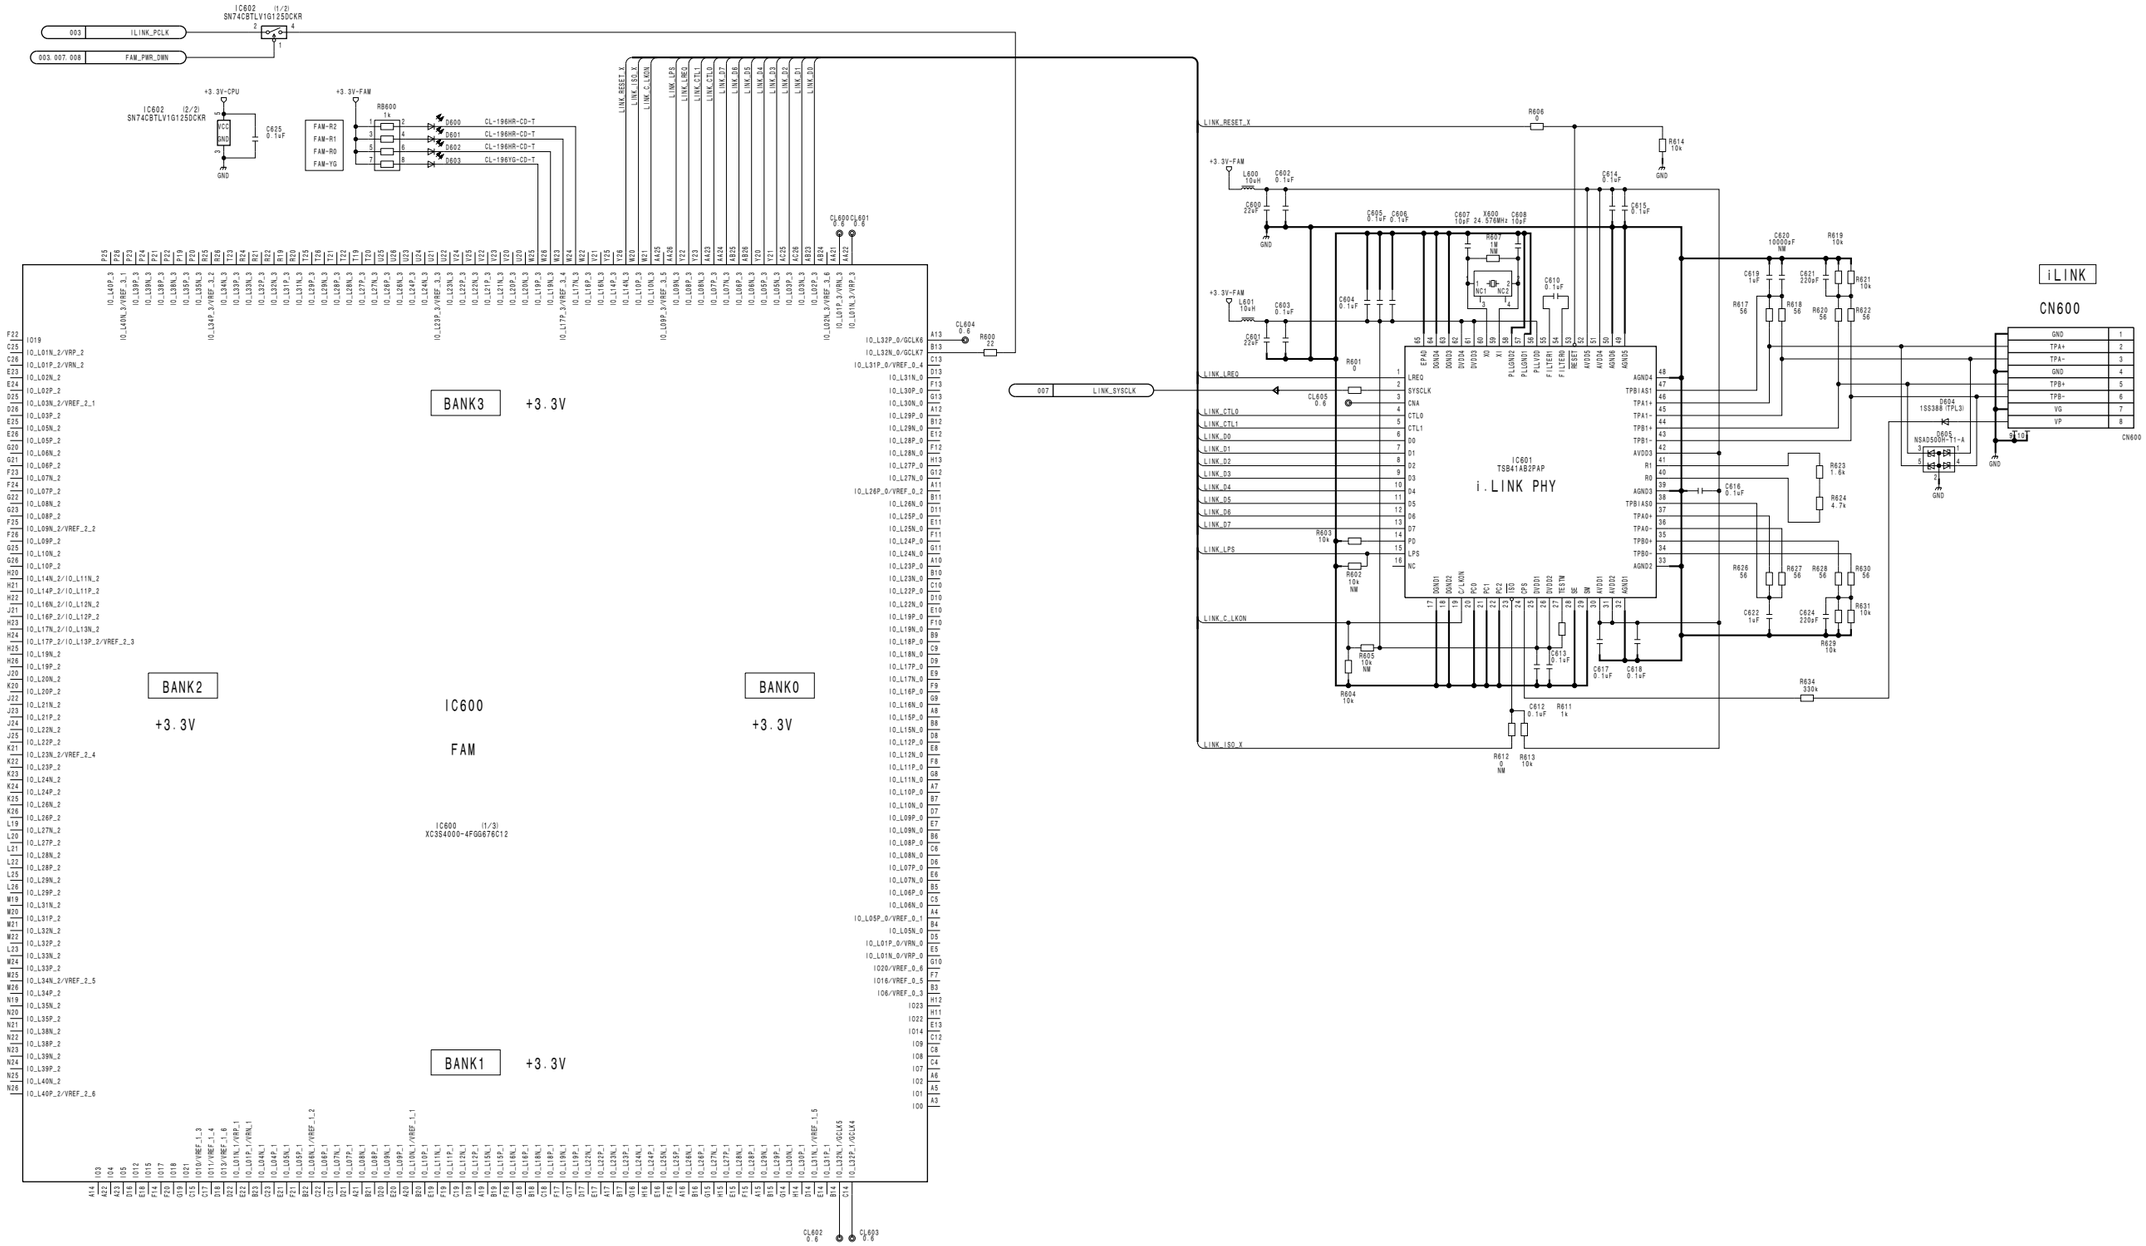


3-116


SY-355 (6/16)
BOARD NO. 1-876-836-12
PDW-700_SY-355_012_6

PDW-F800/V2 (J,E)

SY-355 (7/16)
SUFFIX: -12

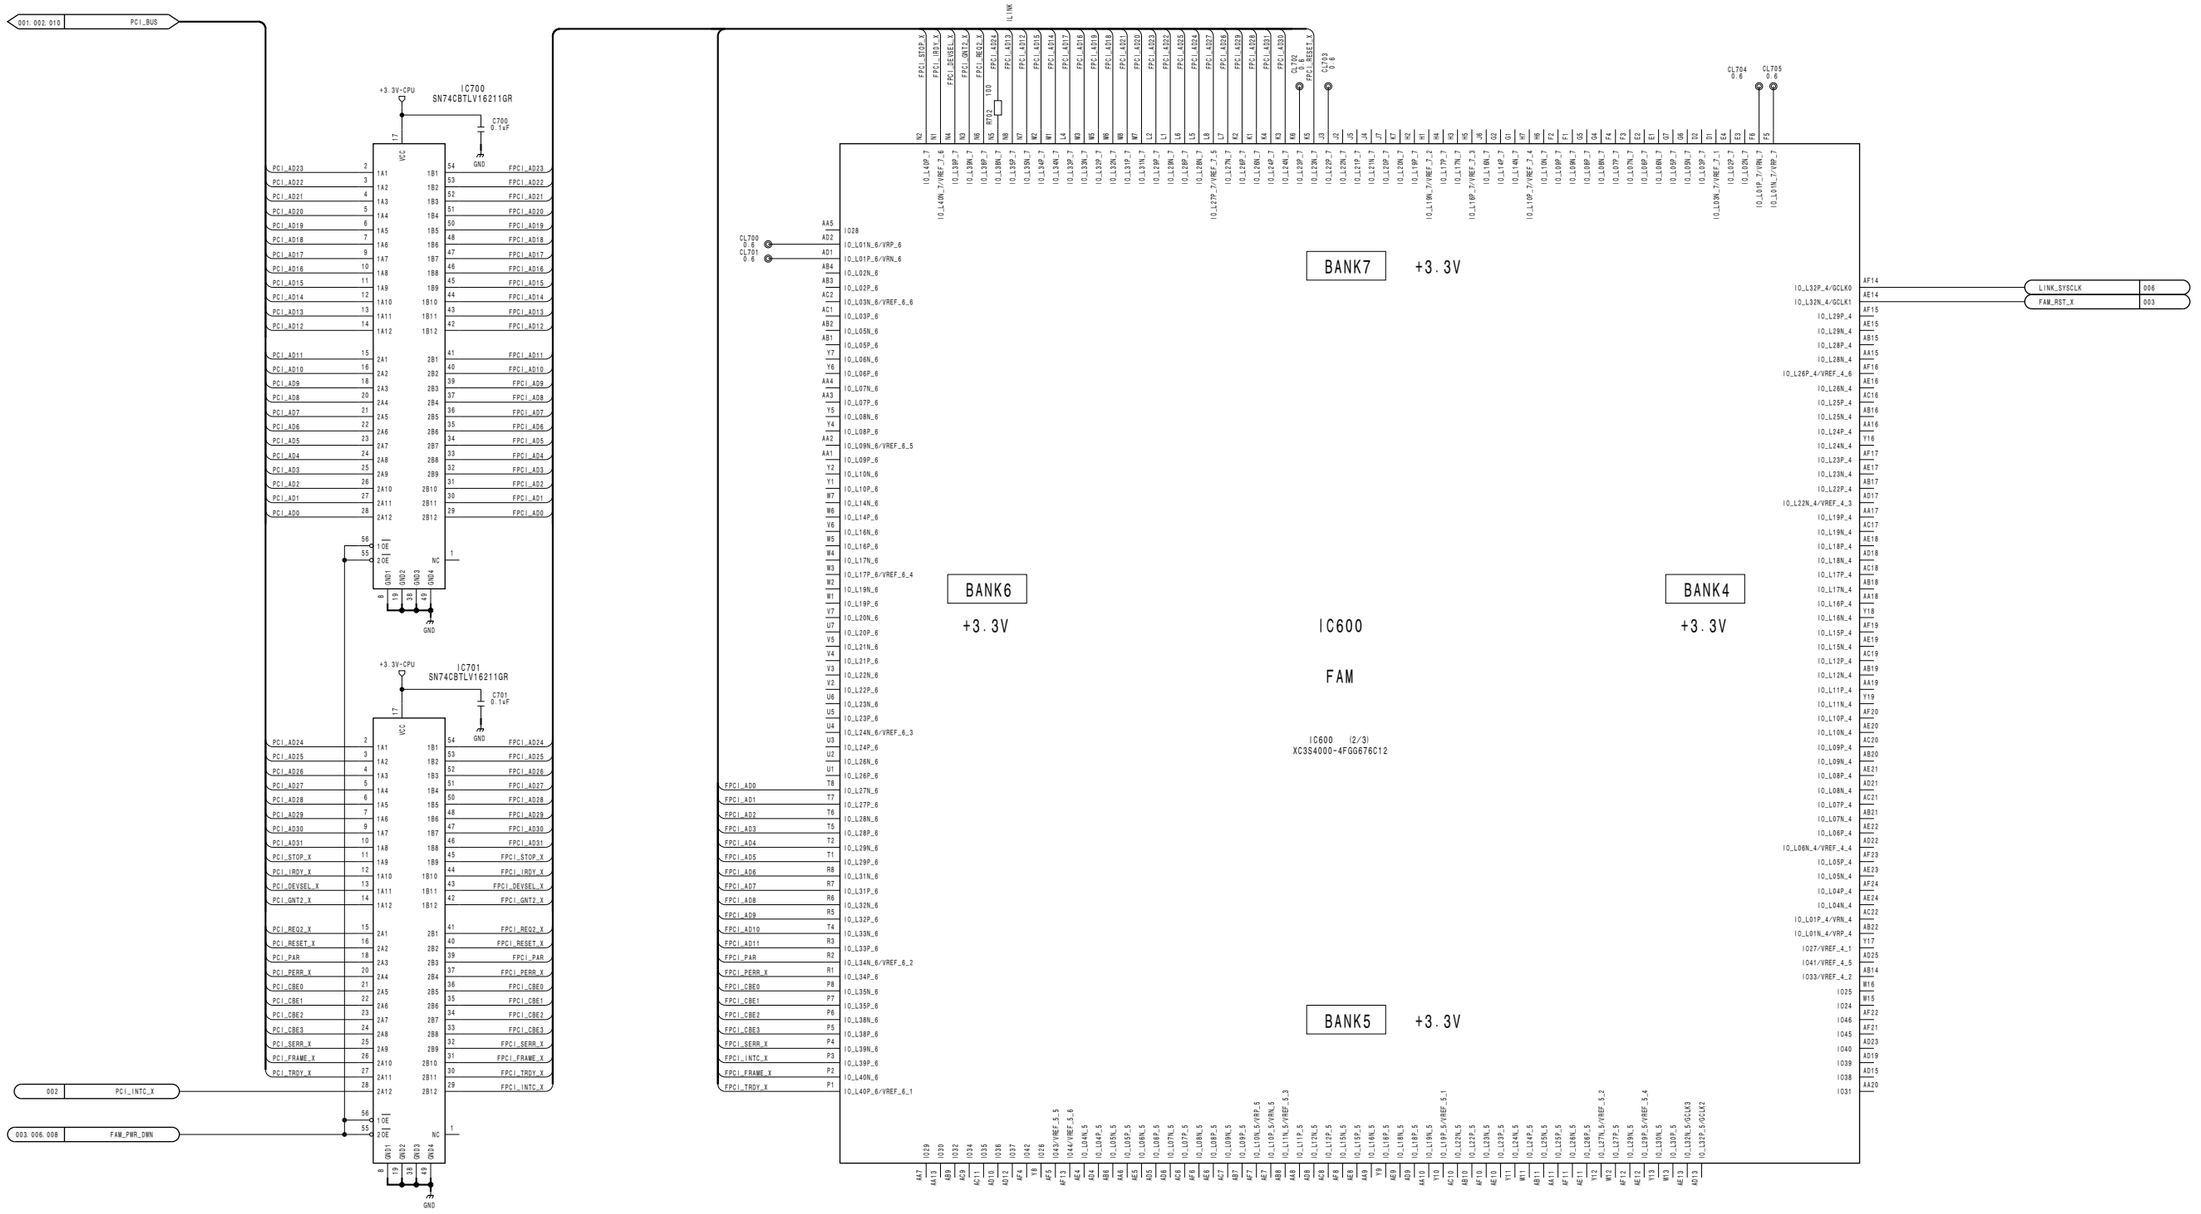

SY-355 (8/16)
SUFFIX: -12

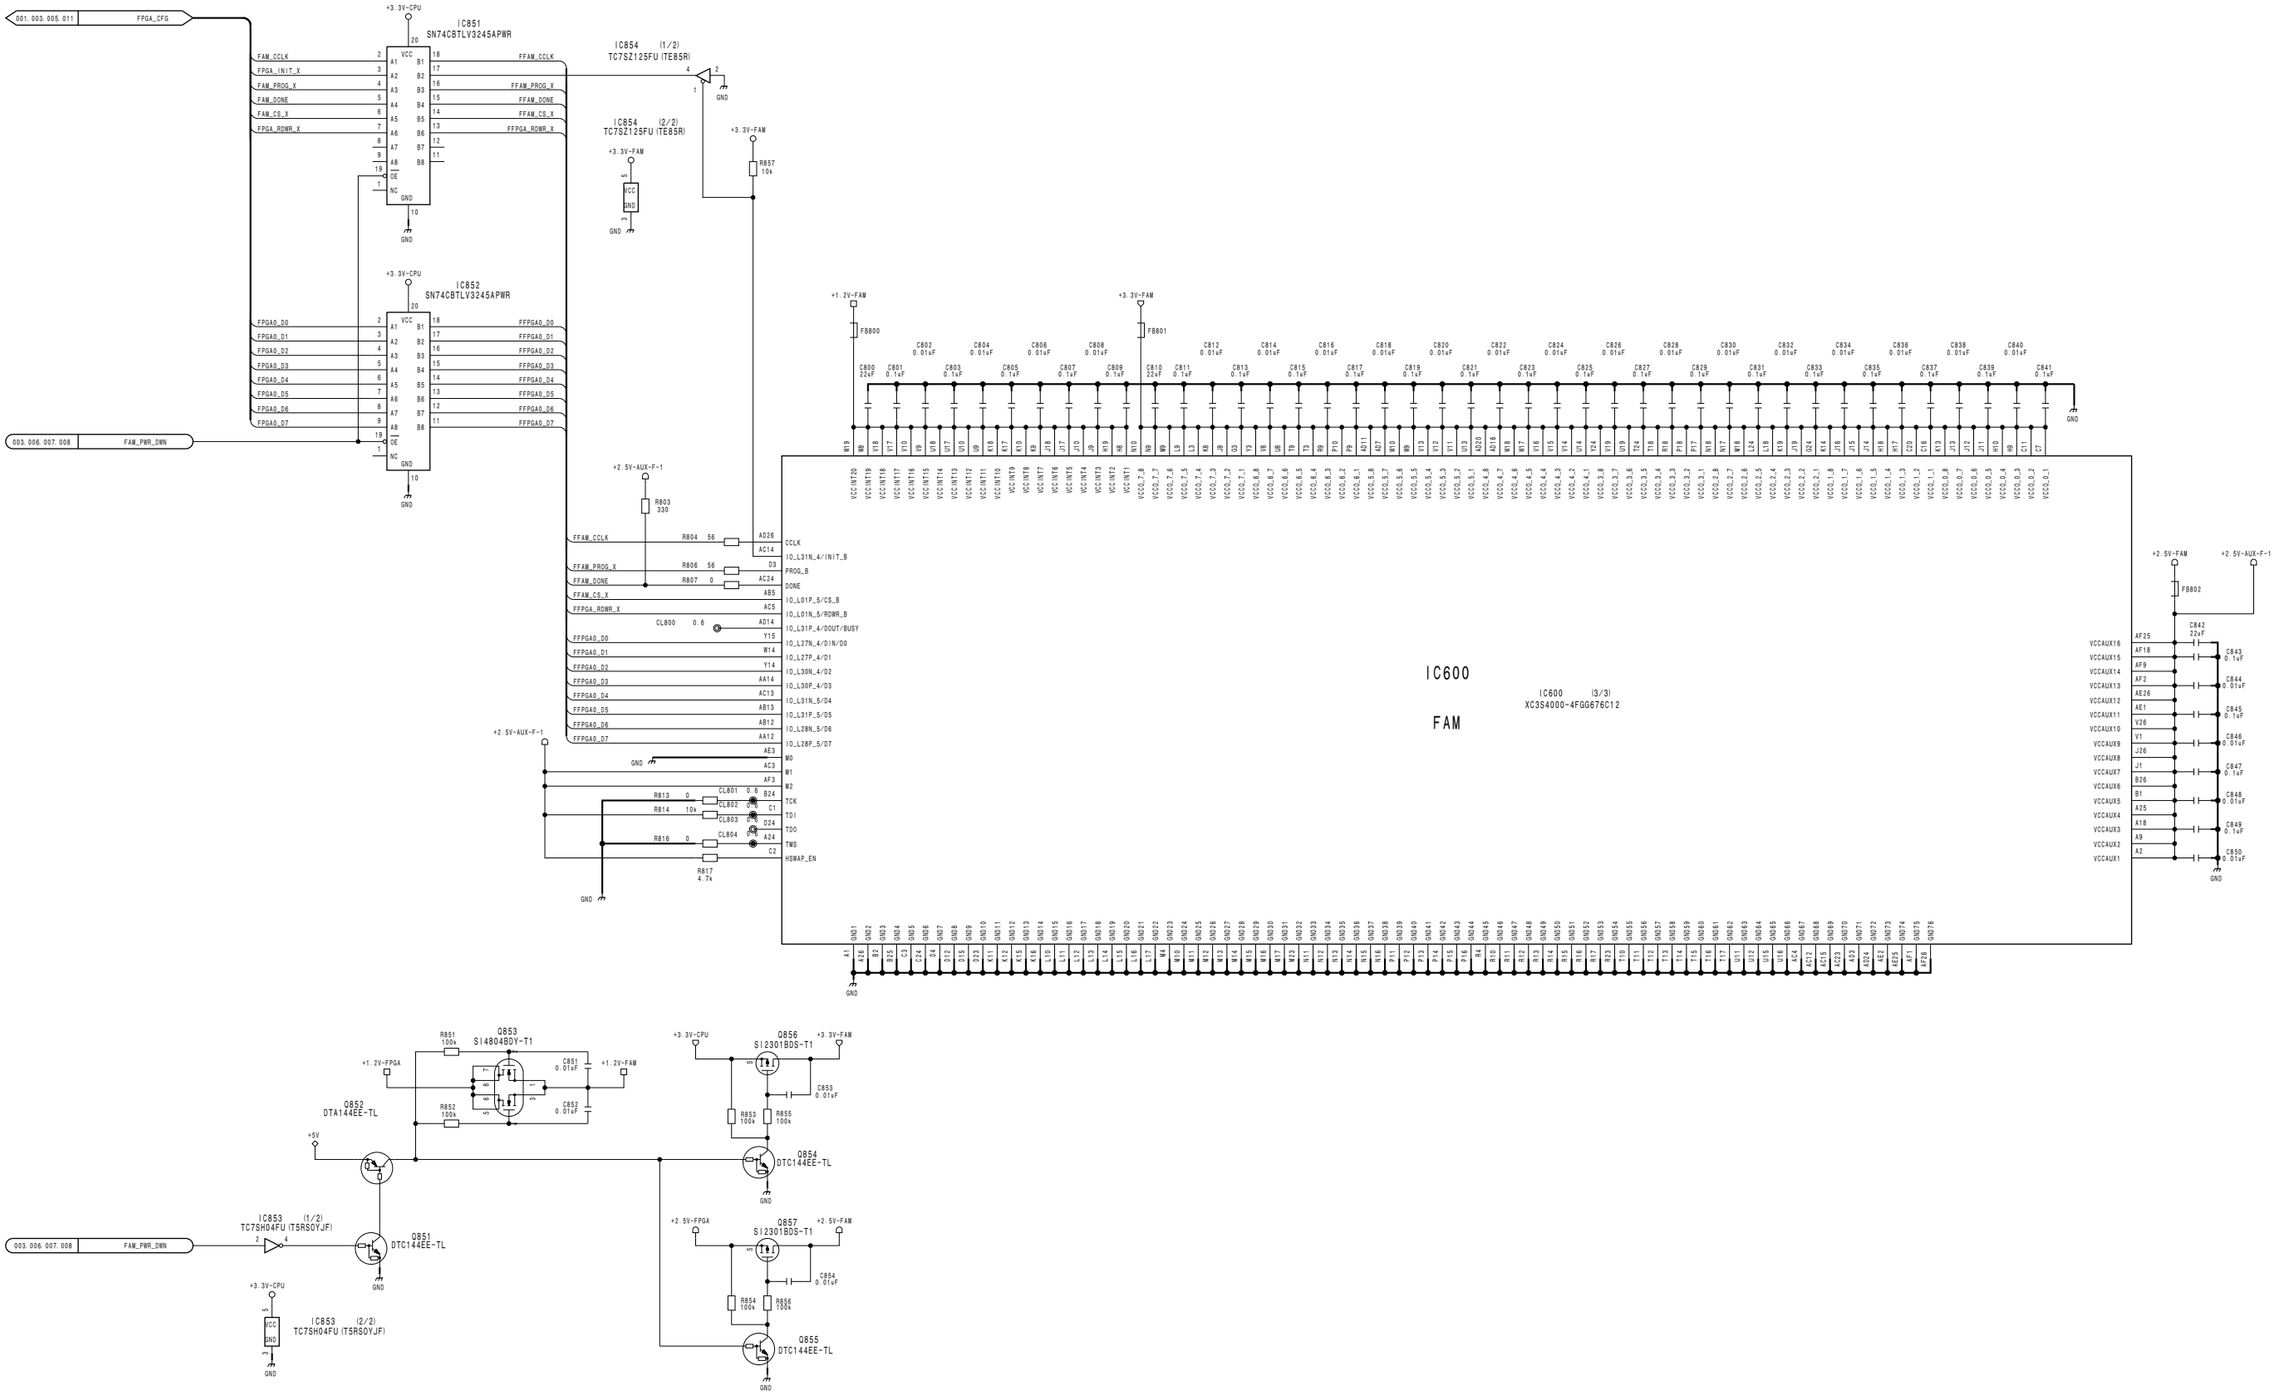


3-118

SY-355 (8/16)
BOARD NO. 1-876-836-12
PDW-700_SY-355_012_8


PDW-F800/V2 (J,E)


SY-355 (9/16)
SUFFIX: -12

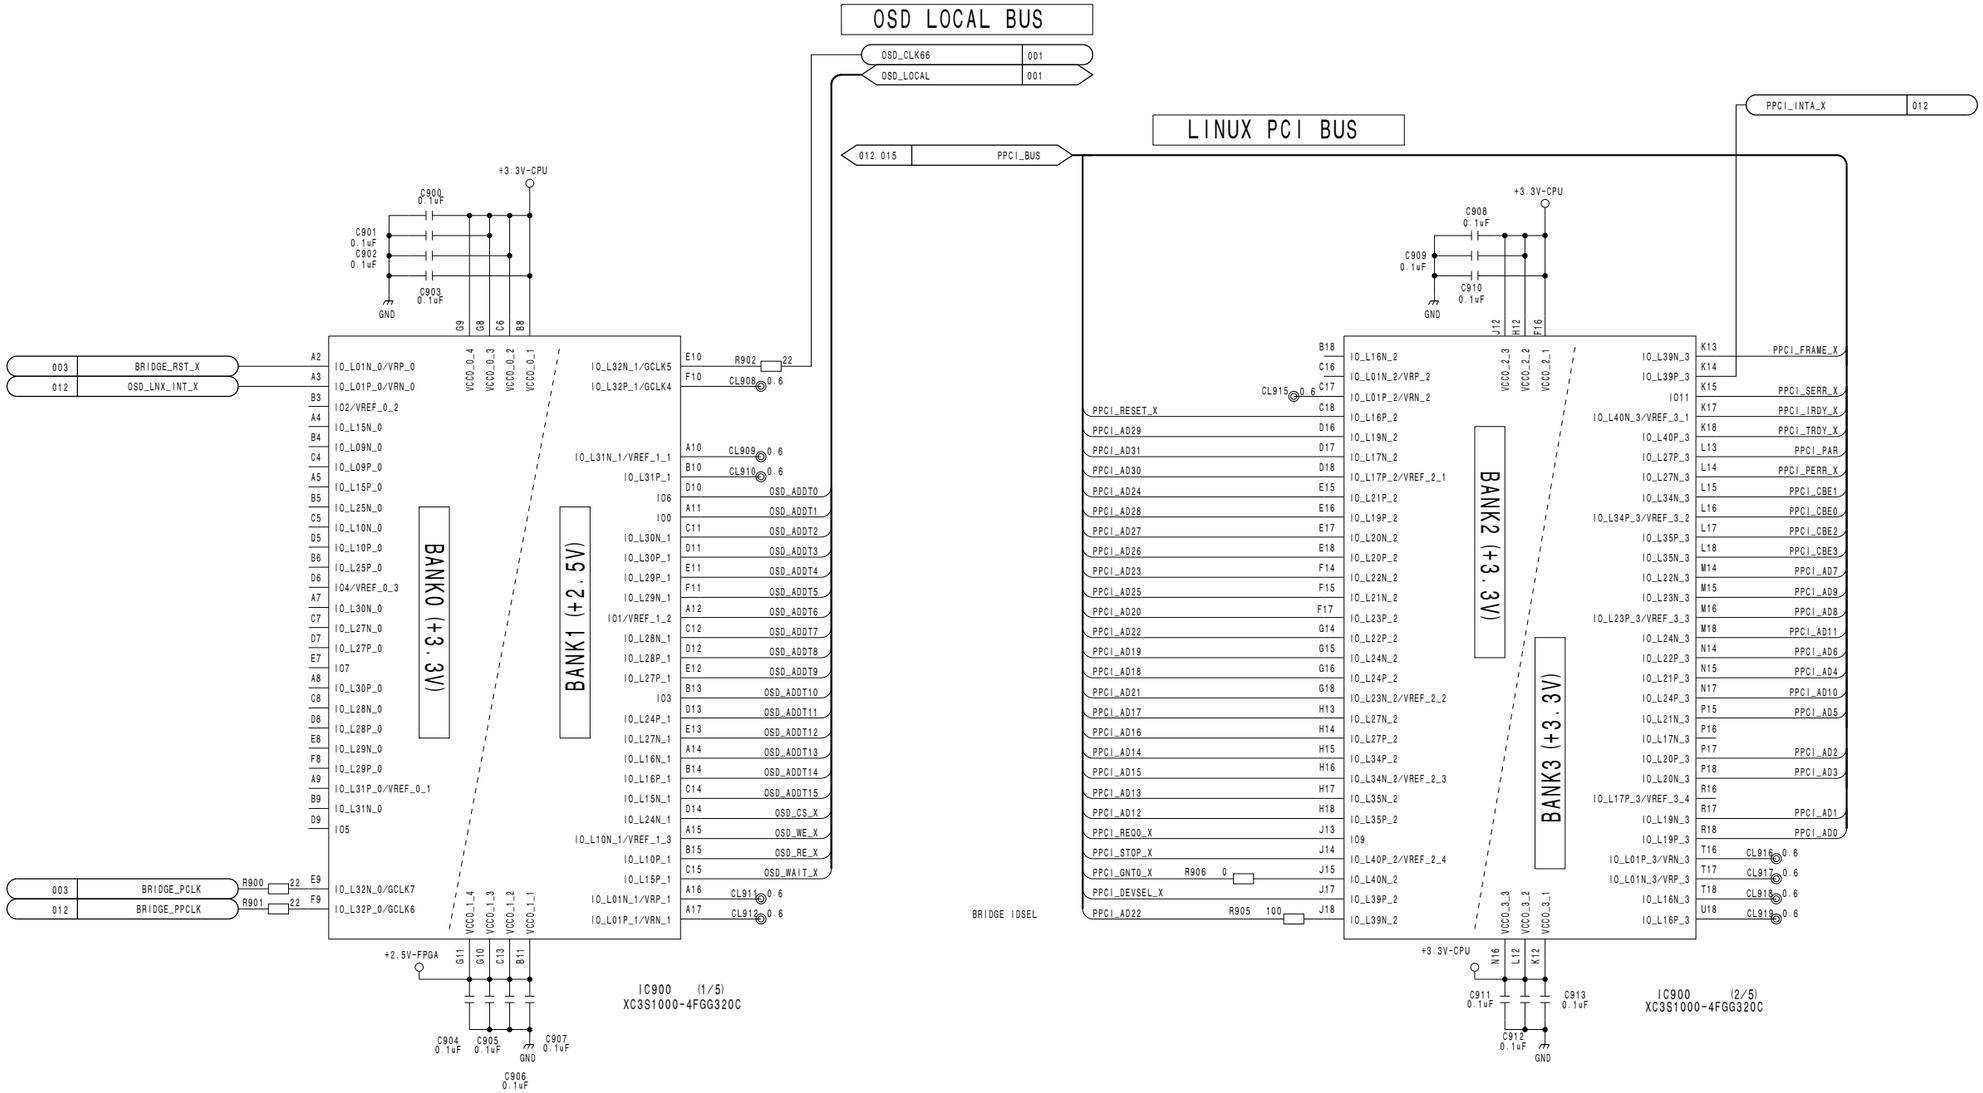

SY-355 (9/16)
BOARD NO. 1-876-836-12
PDW-700_SY-355_012_9


SY-355 (10/16)
SUFFIX: -12

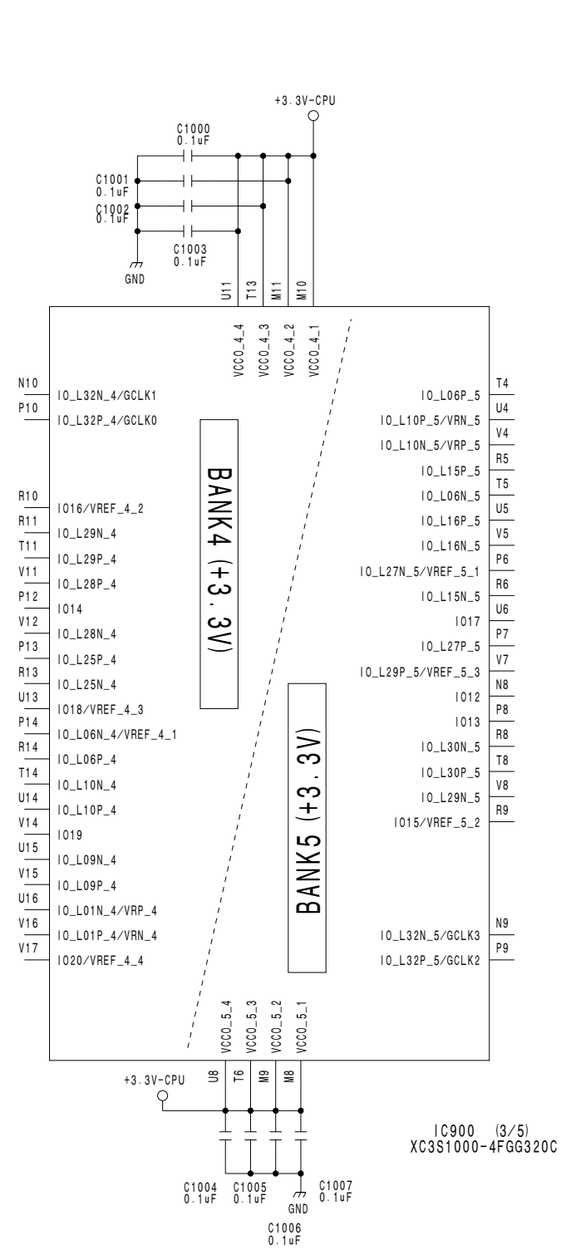

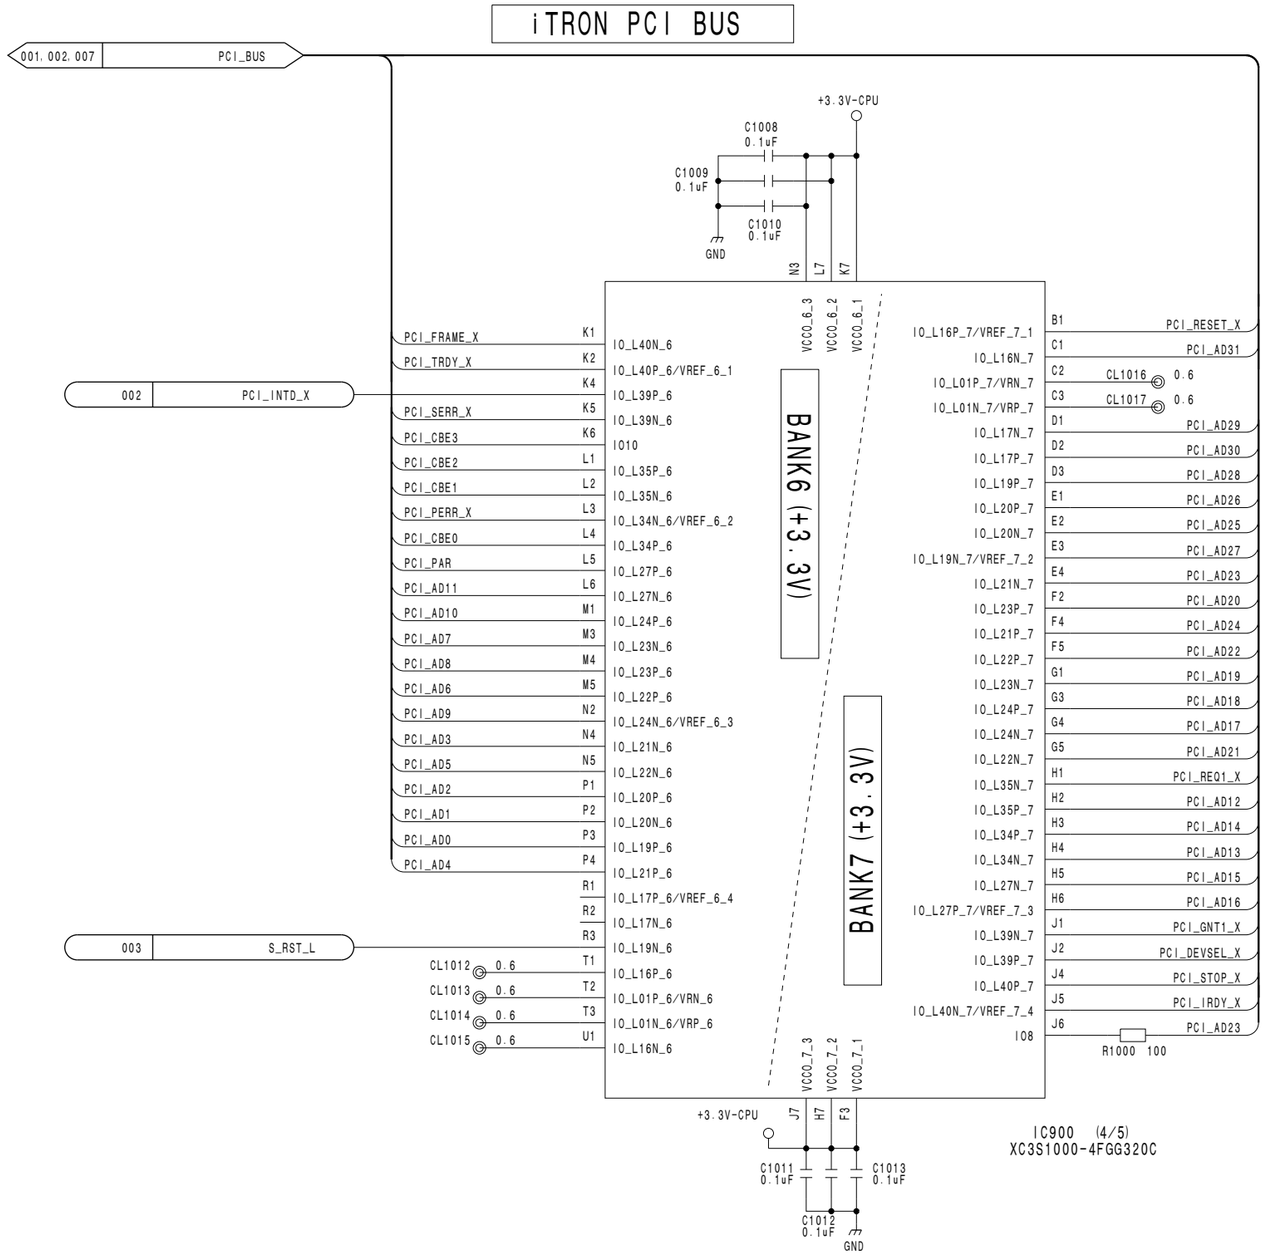

SY-355 (10/16)
BOARD NO. 1-876-836-12
PDW-700_SY-355_012_10

SY-355 (11/16)
SUFFIX: -12

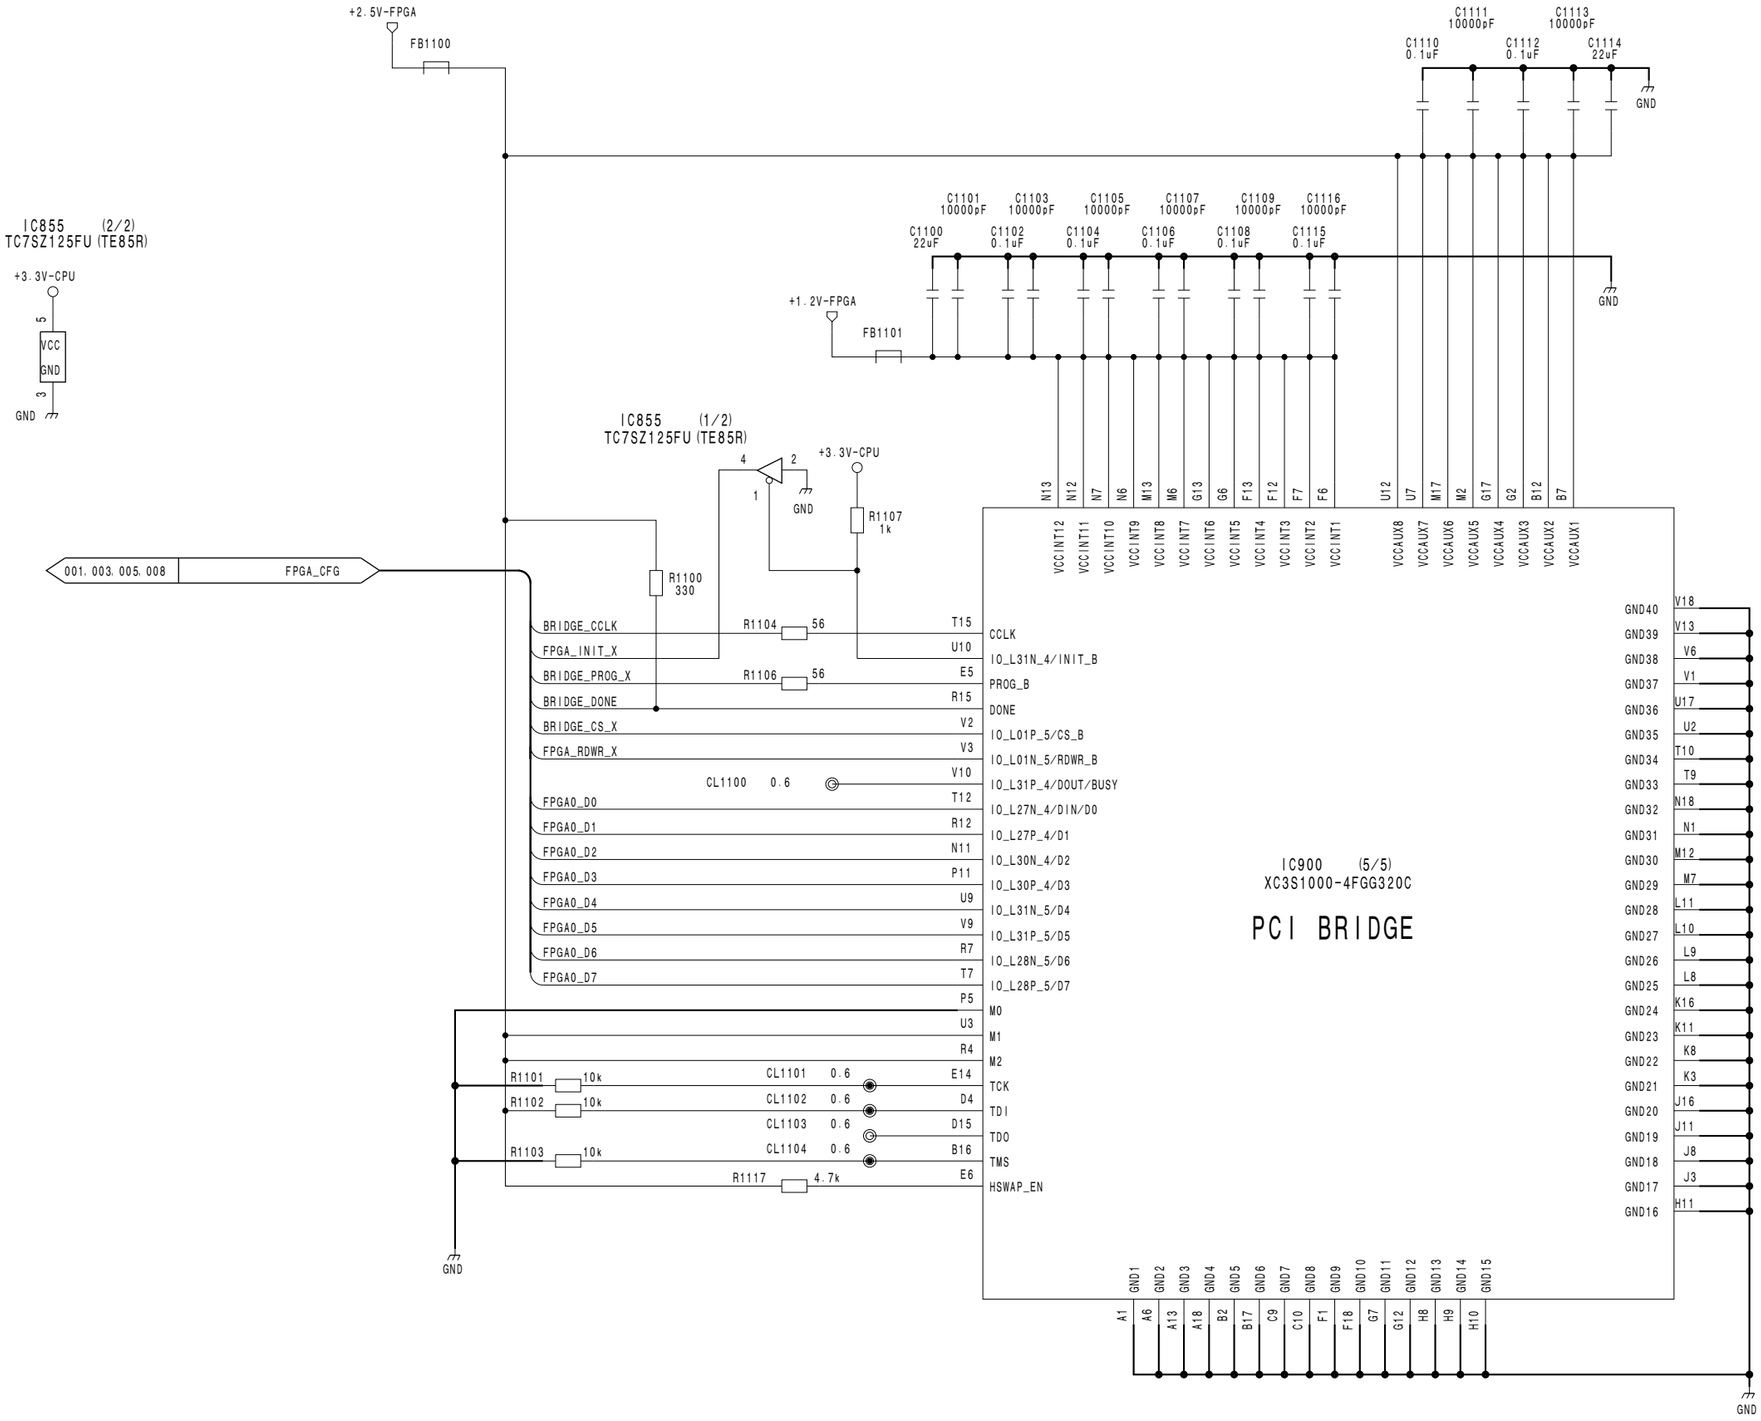

SY-355 (11/16)
BOARD NO. 1-876-836-12
PDW-700_SY-355_012_11

3-121

SY-355 (12/16) **SUFFIX: -12**

Linux CPU


IC1300


IC1300 (1/3)
MPC8248VRTIEA


Put them close, PLL

3-122

SY-355 (12/16)
SUFFIX: -12

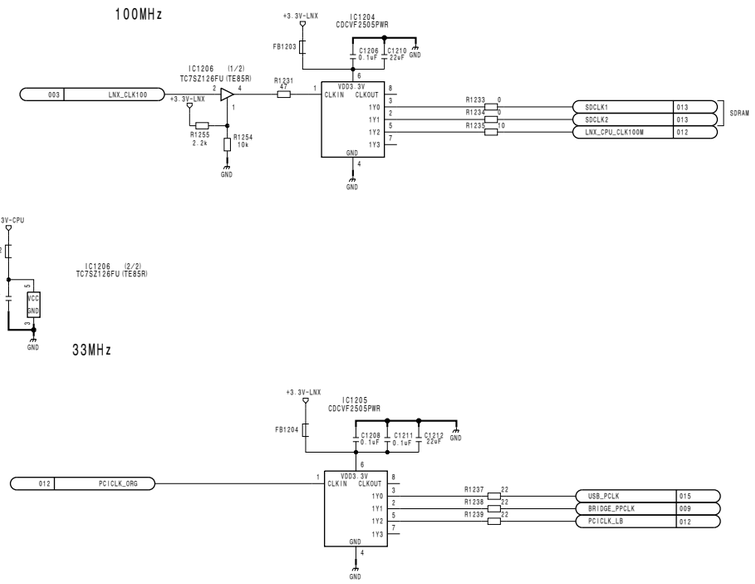


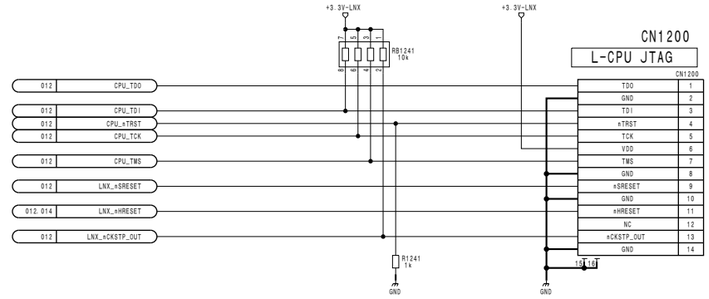

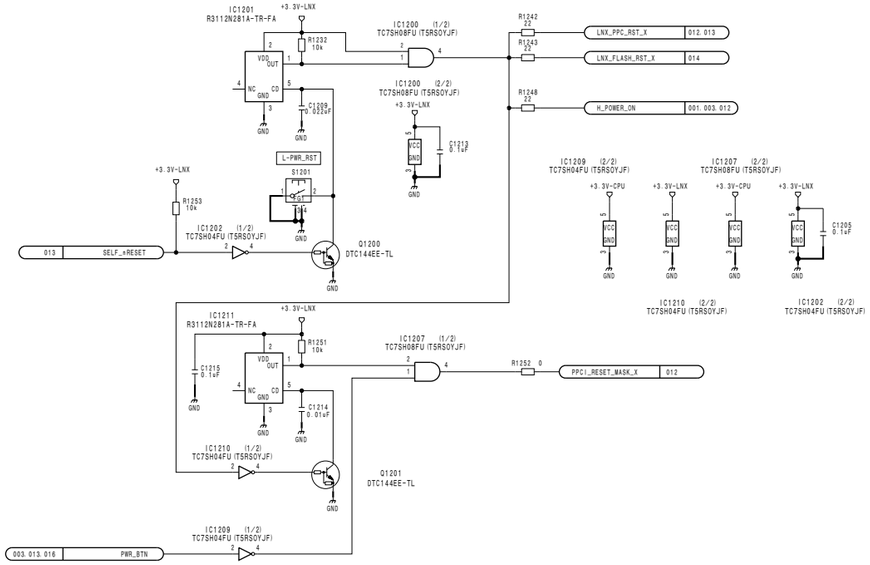


SY-355 (12/16)
BOARD NO. 1-876-836-12
PDW-700_SY-355_012_12

SY-355 (13/16)
SUFFIX: -12

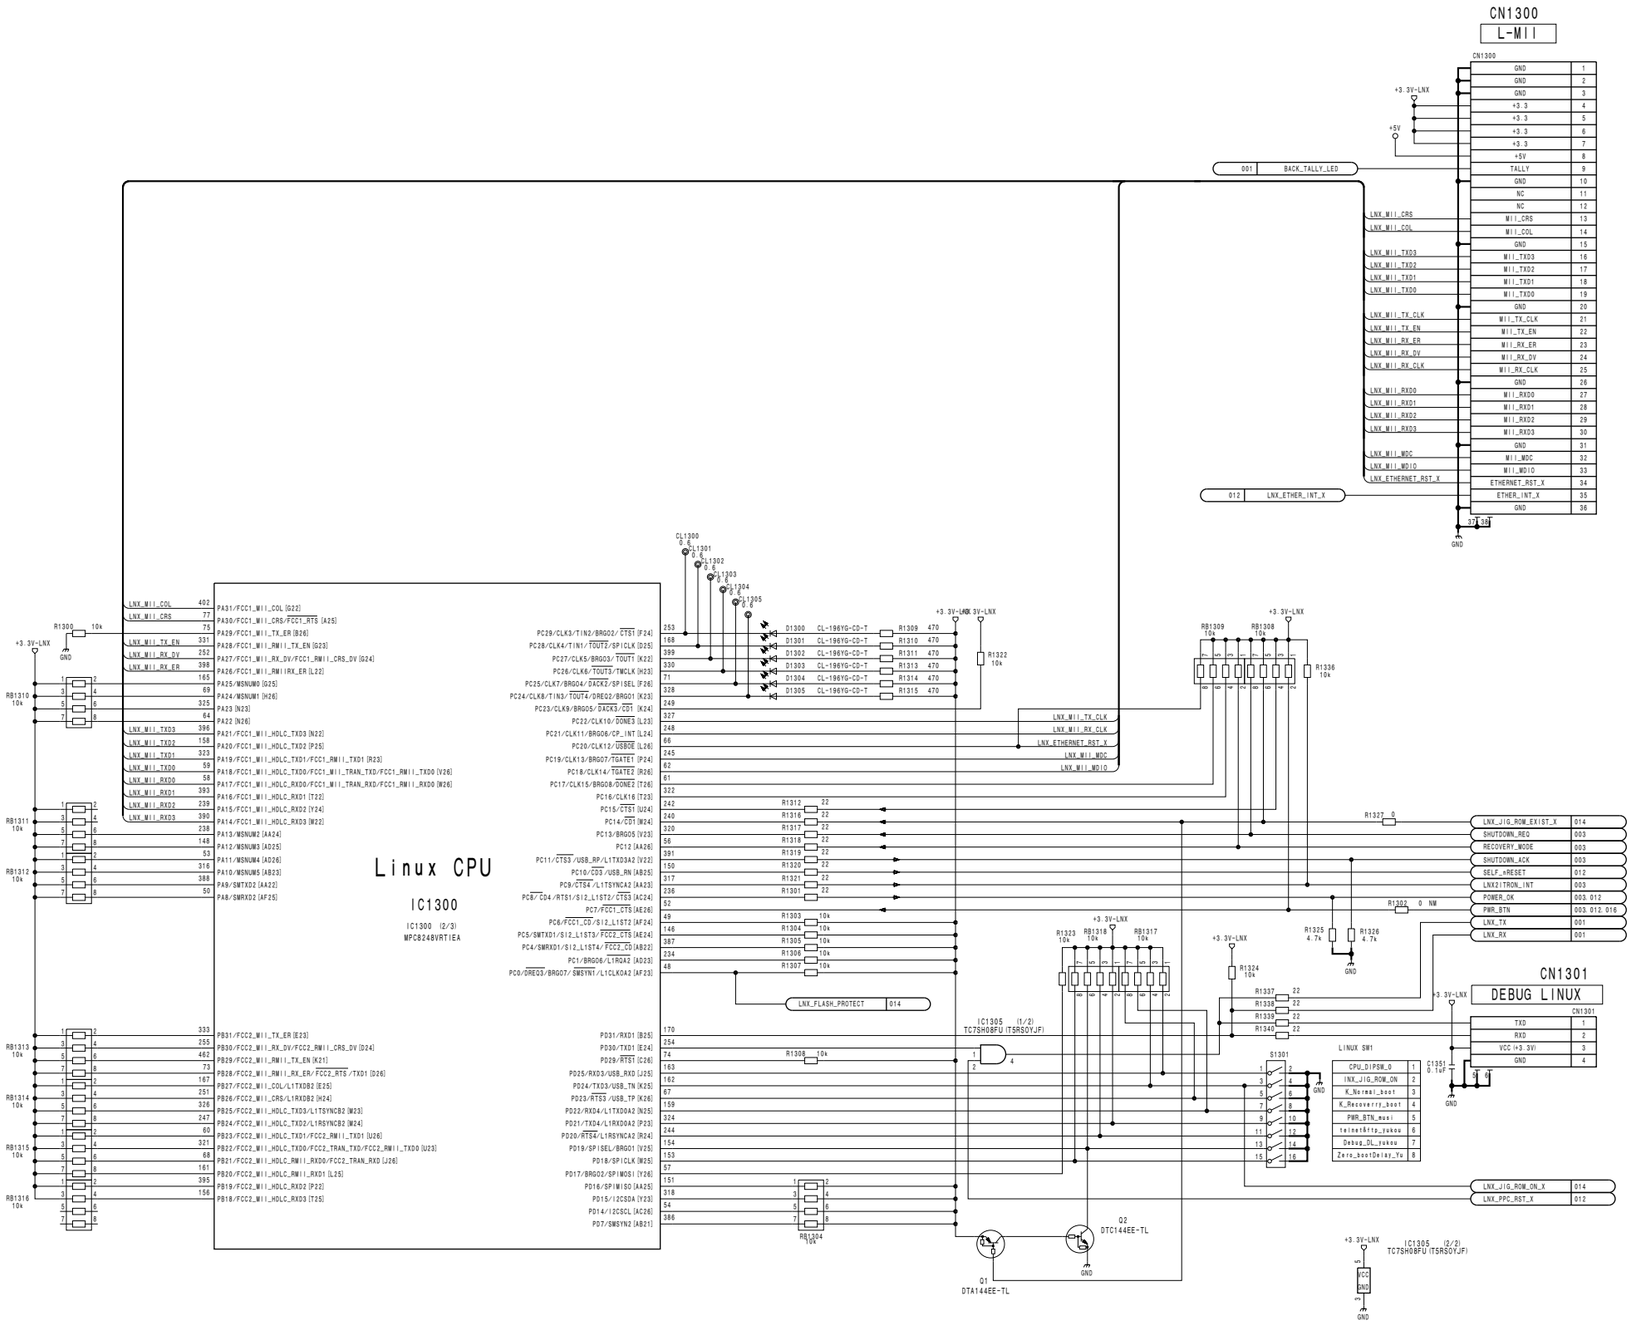

SY-355 (13/16)
SUFFIX: -12

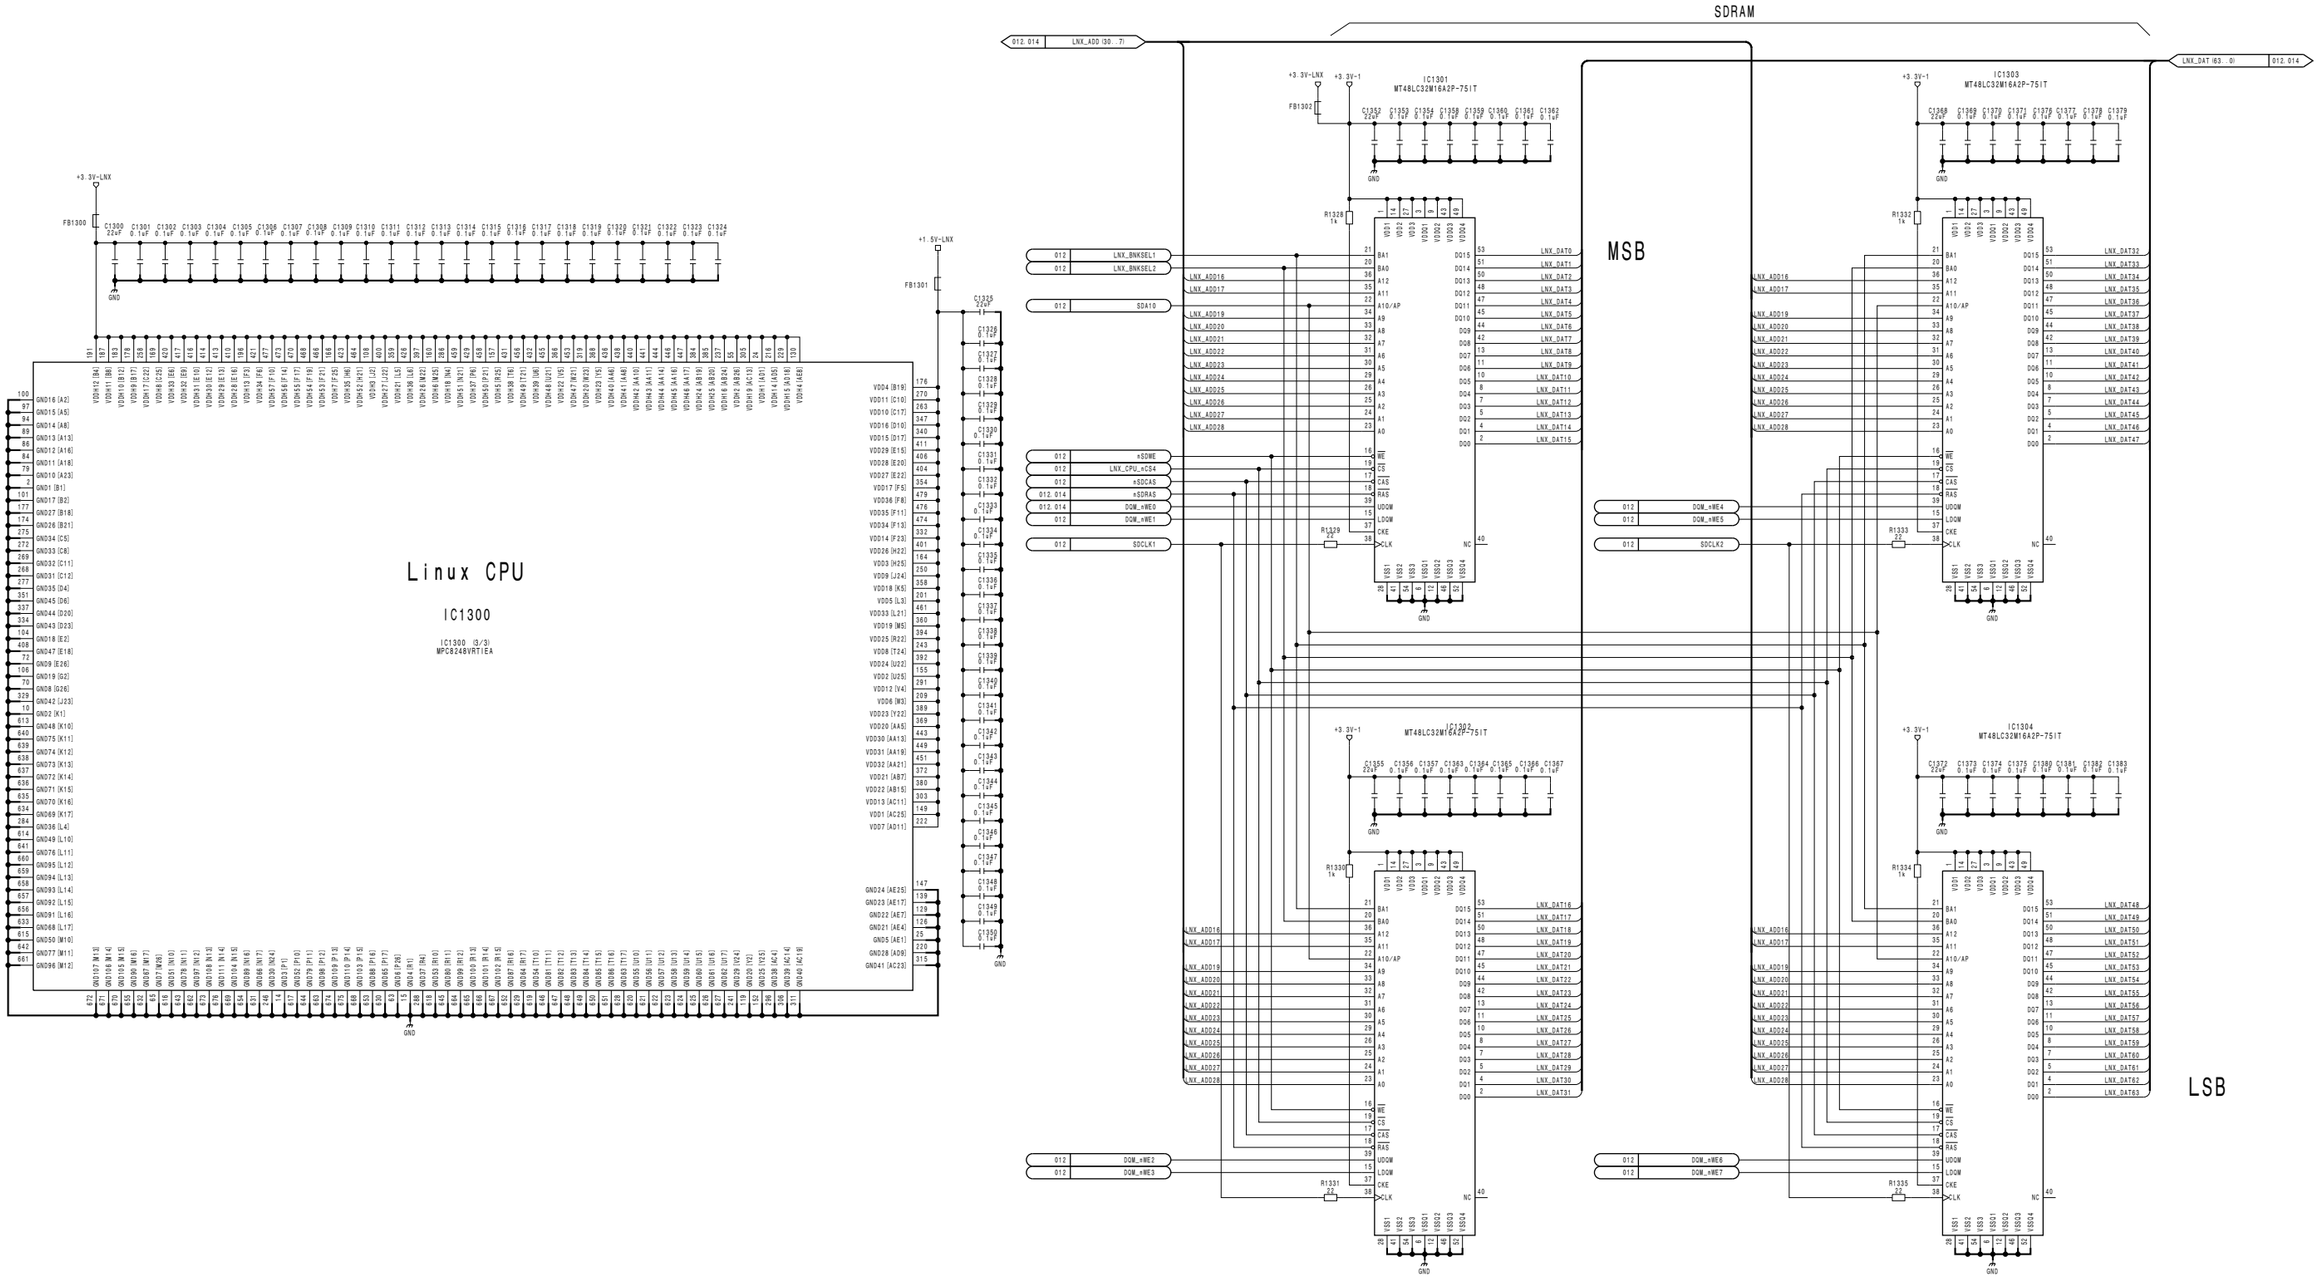

SY-355 (14/16) **SUFFIX: -12**

BUFFER

CN1400
L-CPLD JTAG

IC1400
XC2C32A-6CPG56I


IC1401
SN74LVCHR16245AGR

IC1402
SN74LVCHR16245AGR

IC1403
SN74LVCHR16245AGR

IC1404
SN74LVCHR16245AGR

SY-355 (14/16)
SUFFIX: -12

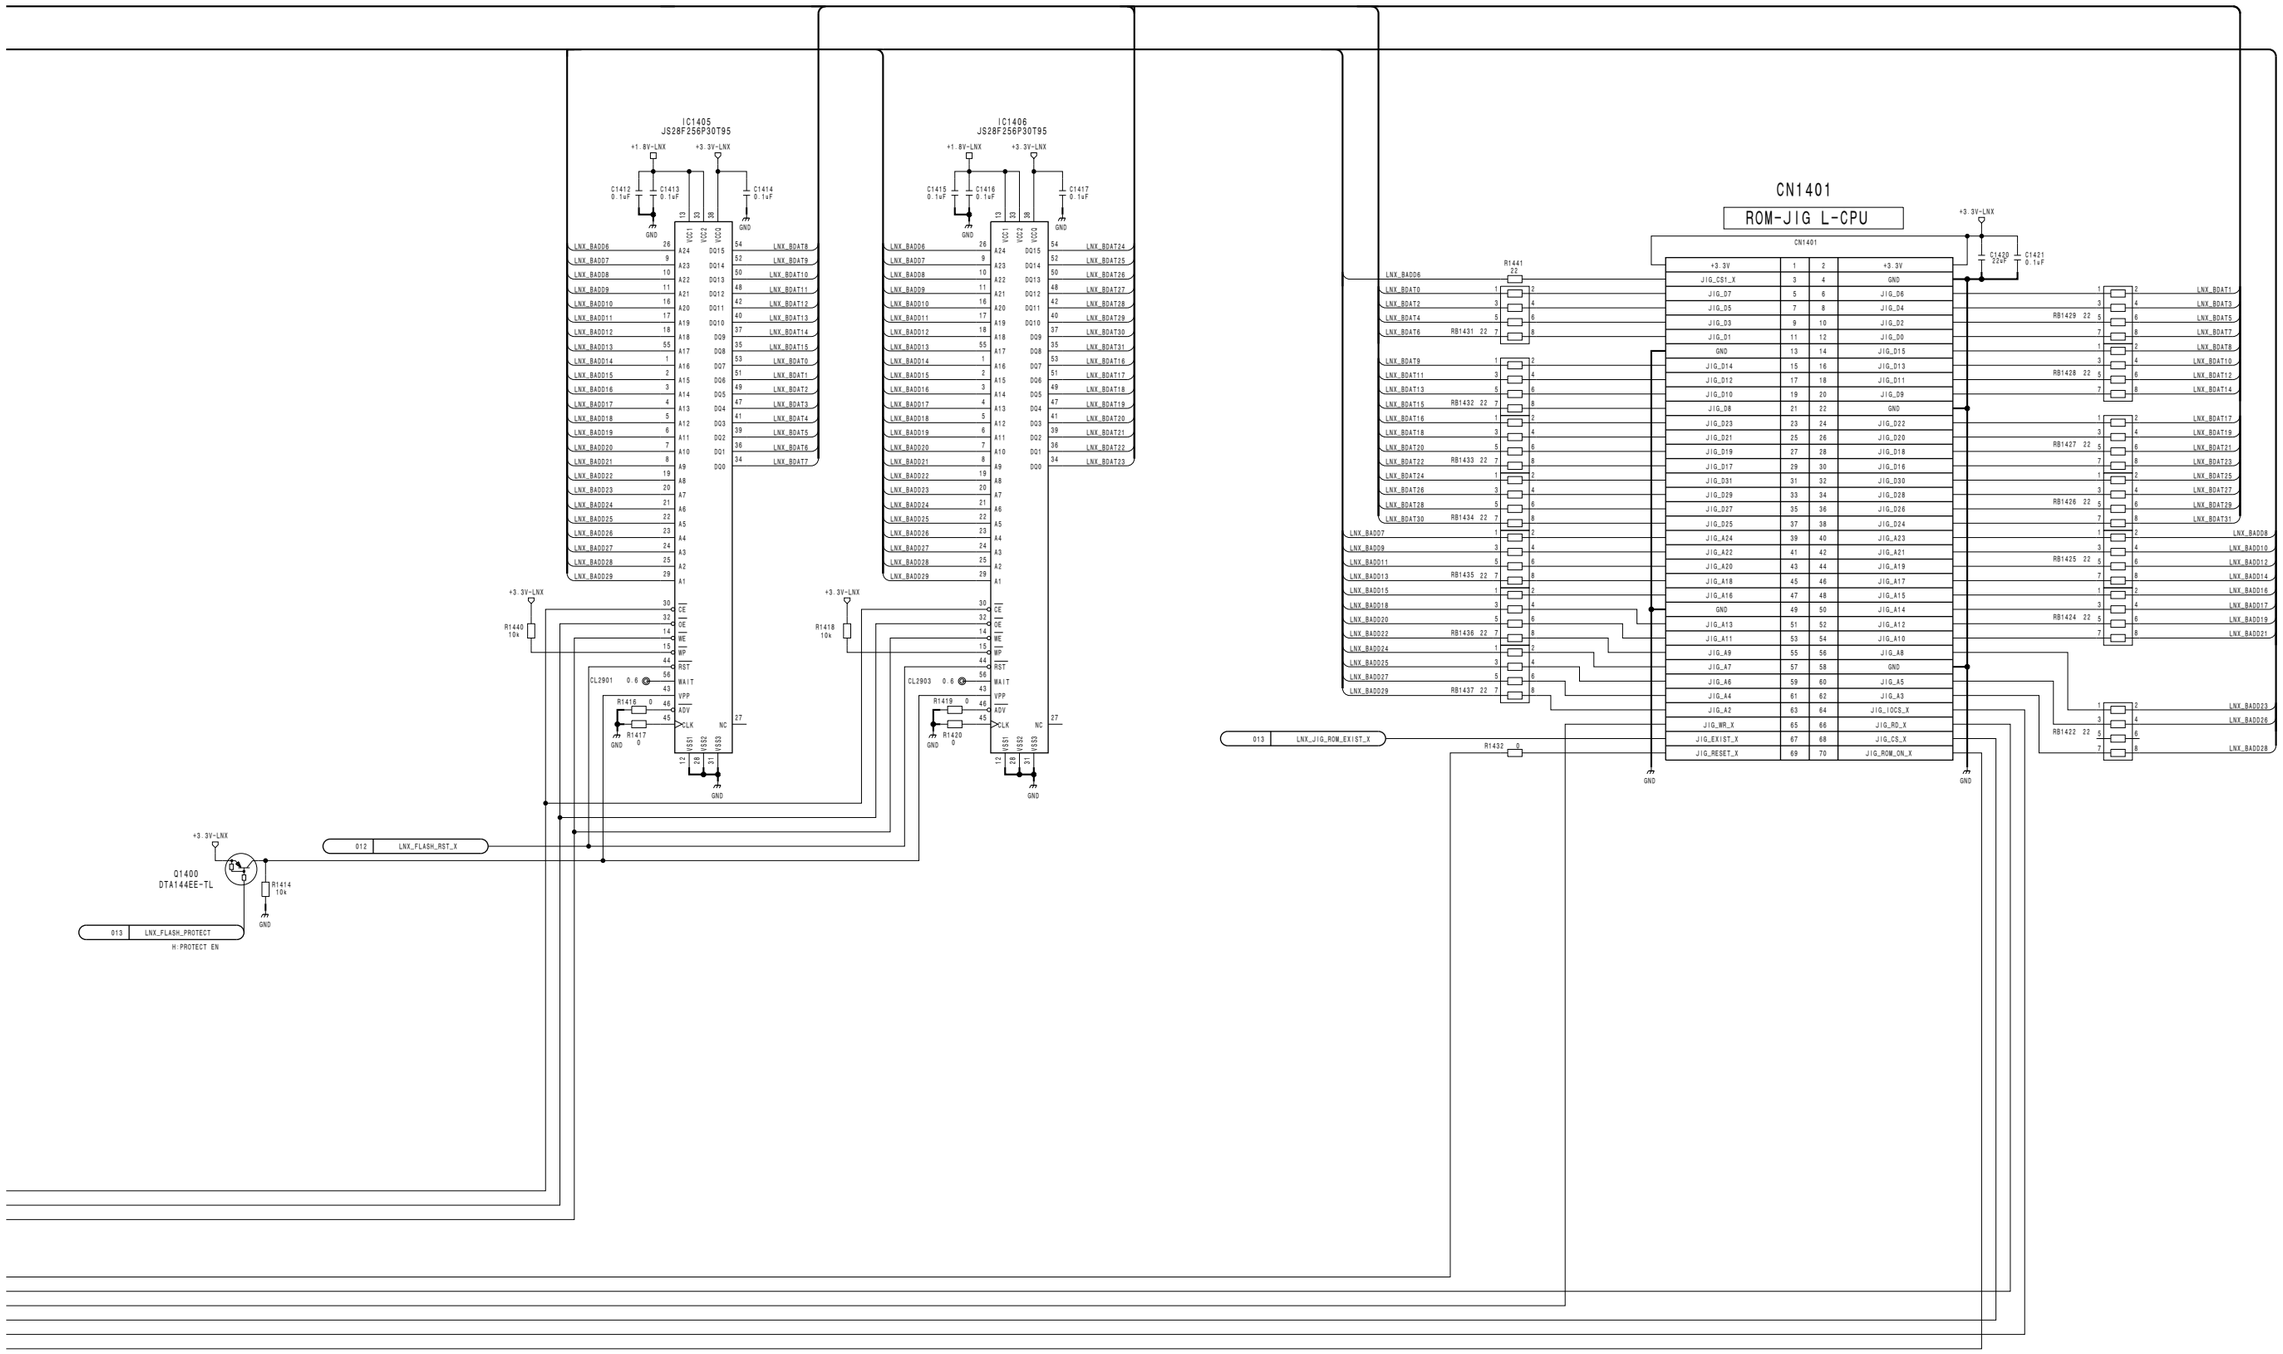


SY-355 (14/16)

BOARD NO. 1-876-836-12

PDW-700_SY-355_012_14

SY-355 (15/16)
SUFFIX: -12

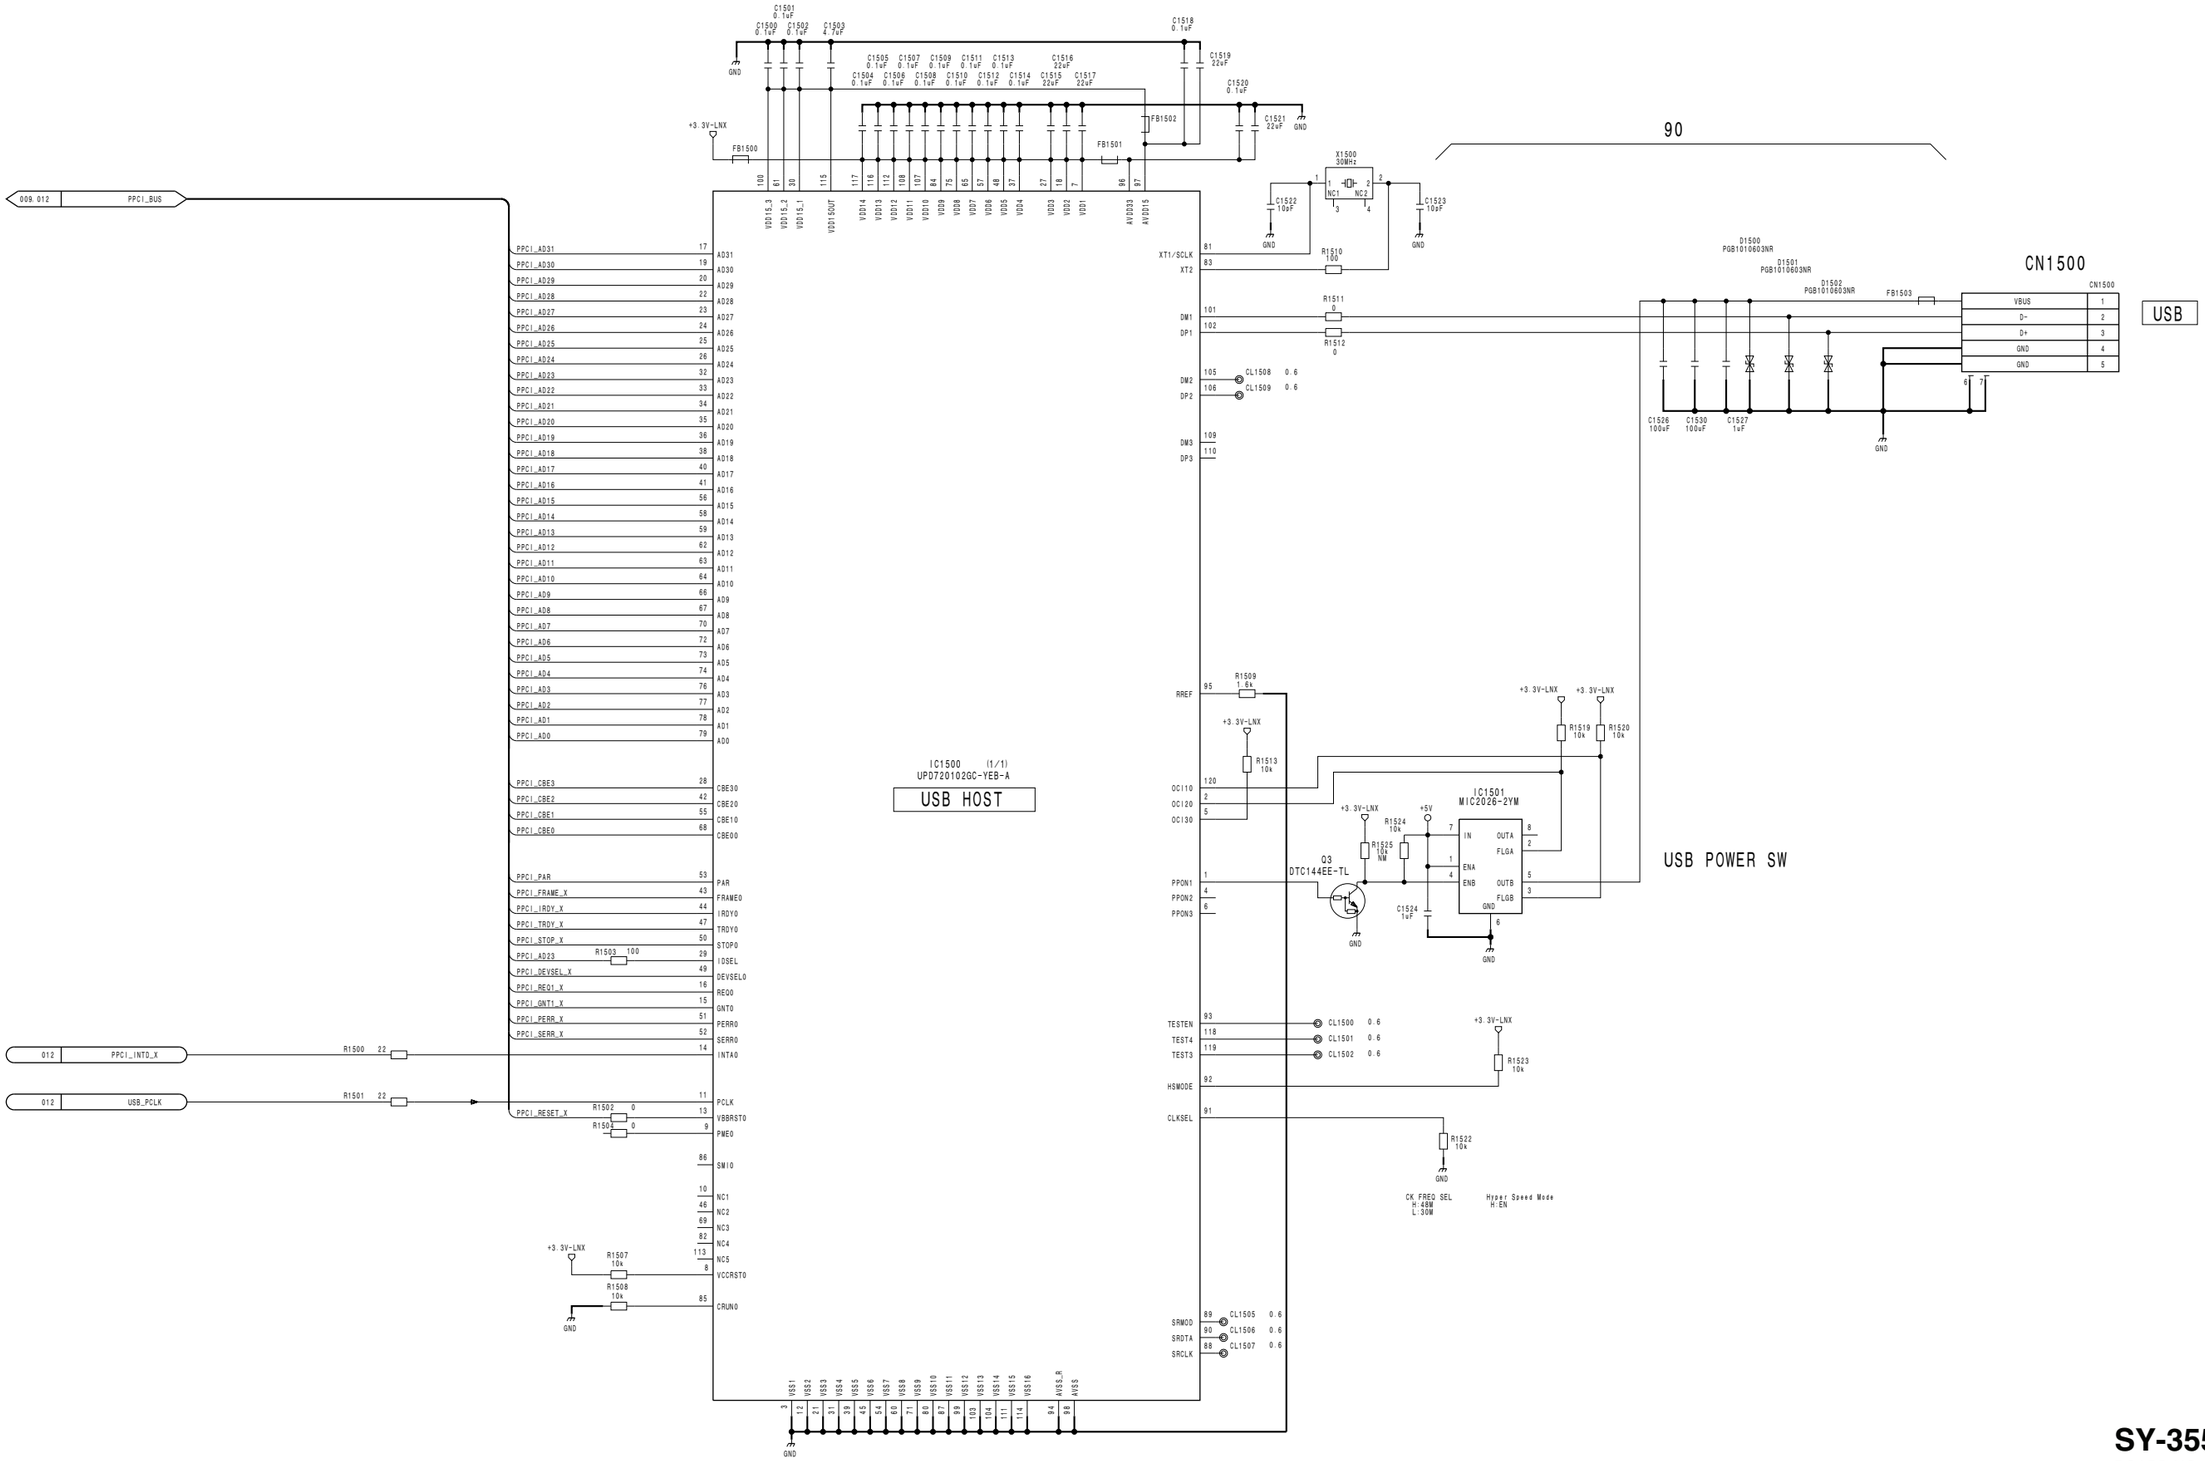


3-128


SY-355 (15/16)
BOARD NO. 1-876-836-12
PDW-700_SY-355_012_15


PDW-F800/V2 (J,E)

SY-355 (16/16)
SUFFIX: -12

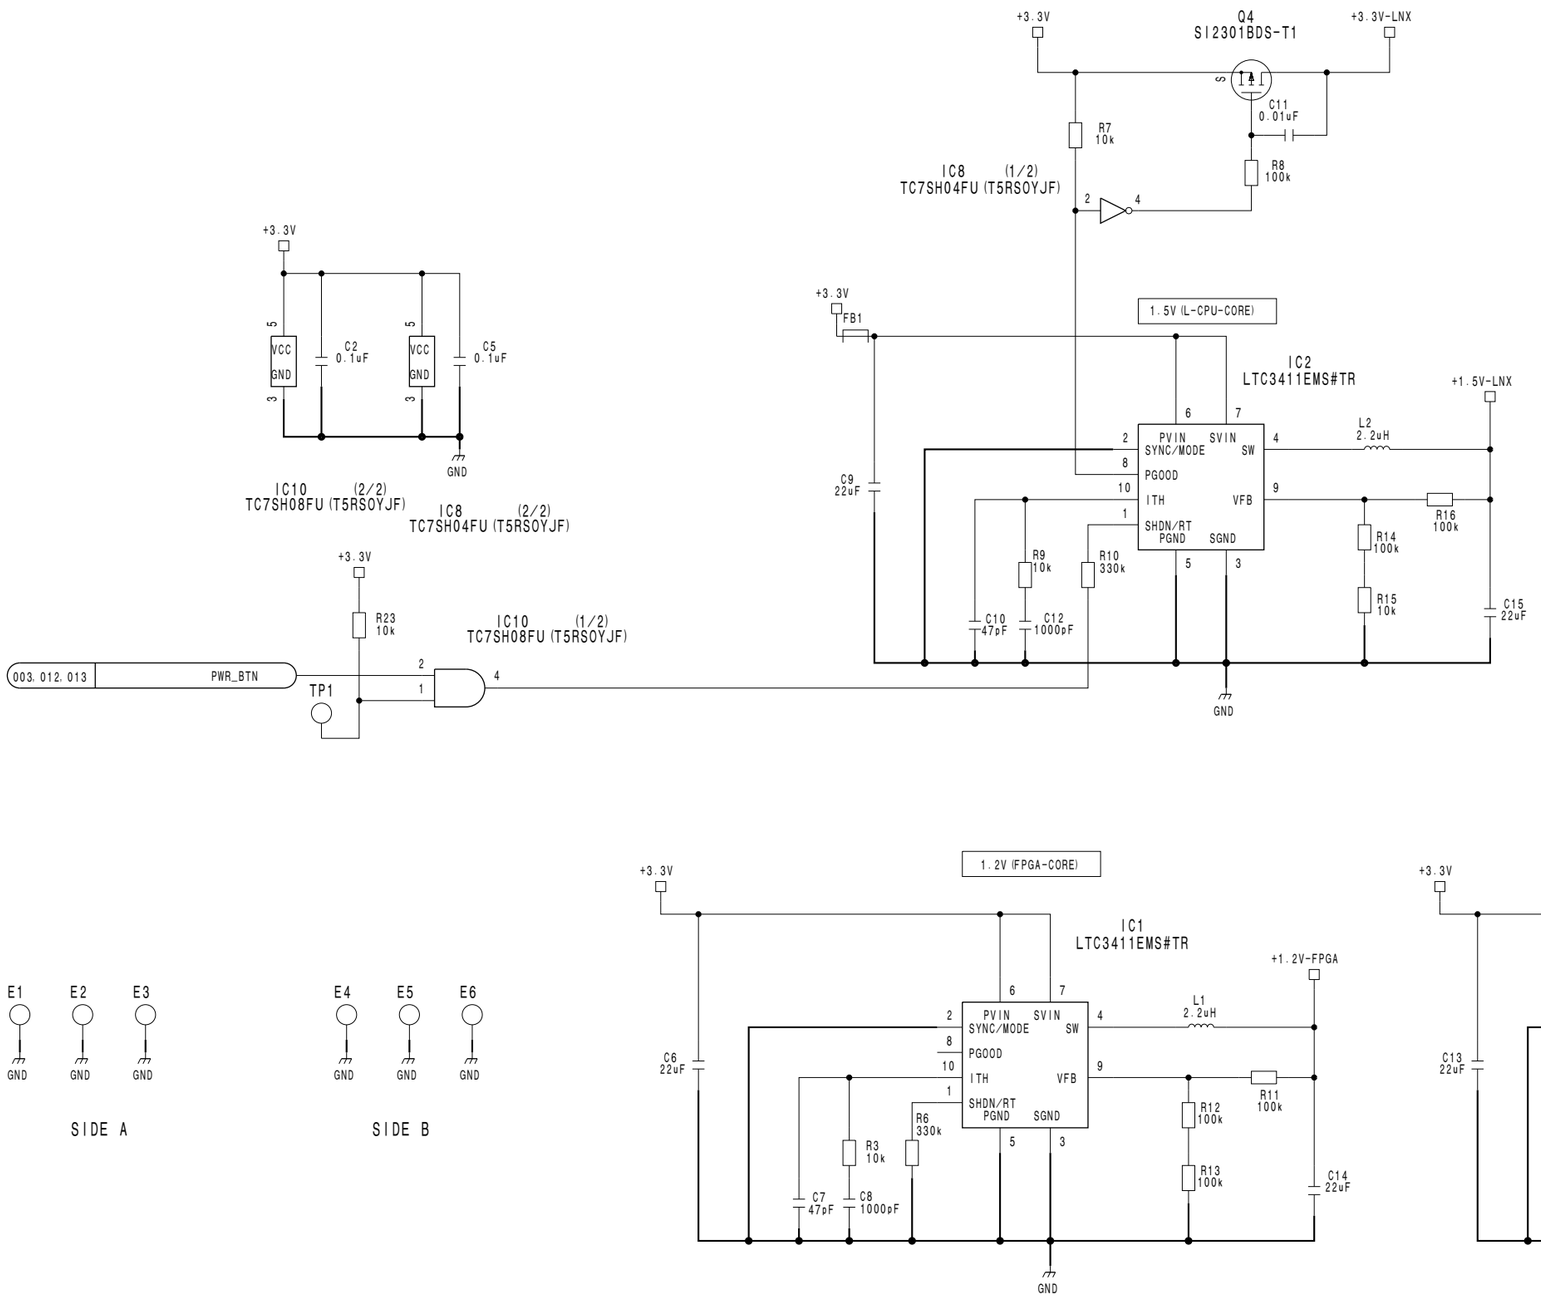


SY-355 (16/16)
BOARD NO. 1-876-836-12
PDW-700_SY-355_012_16

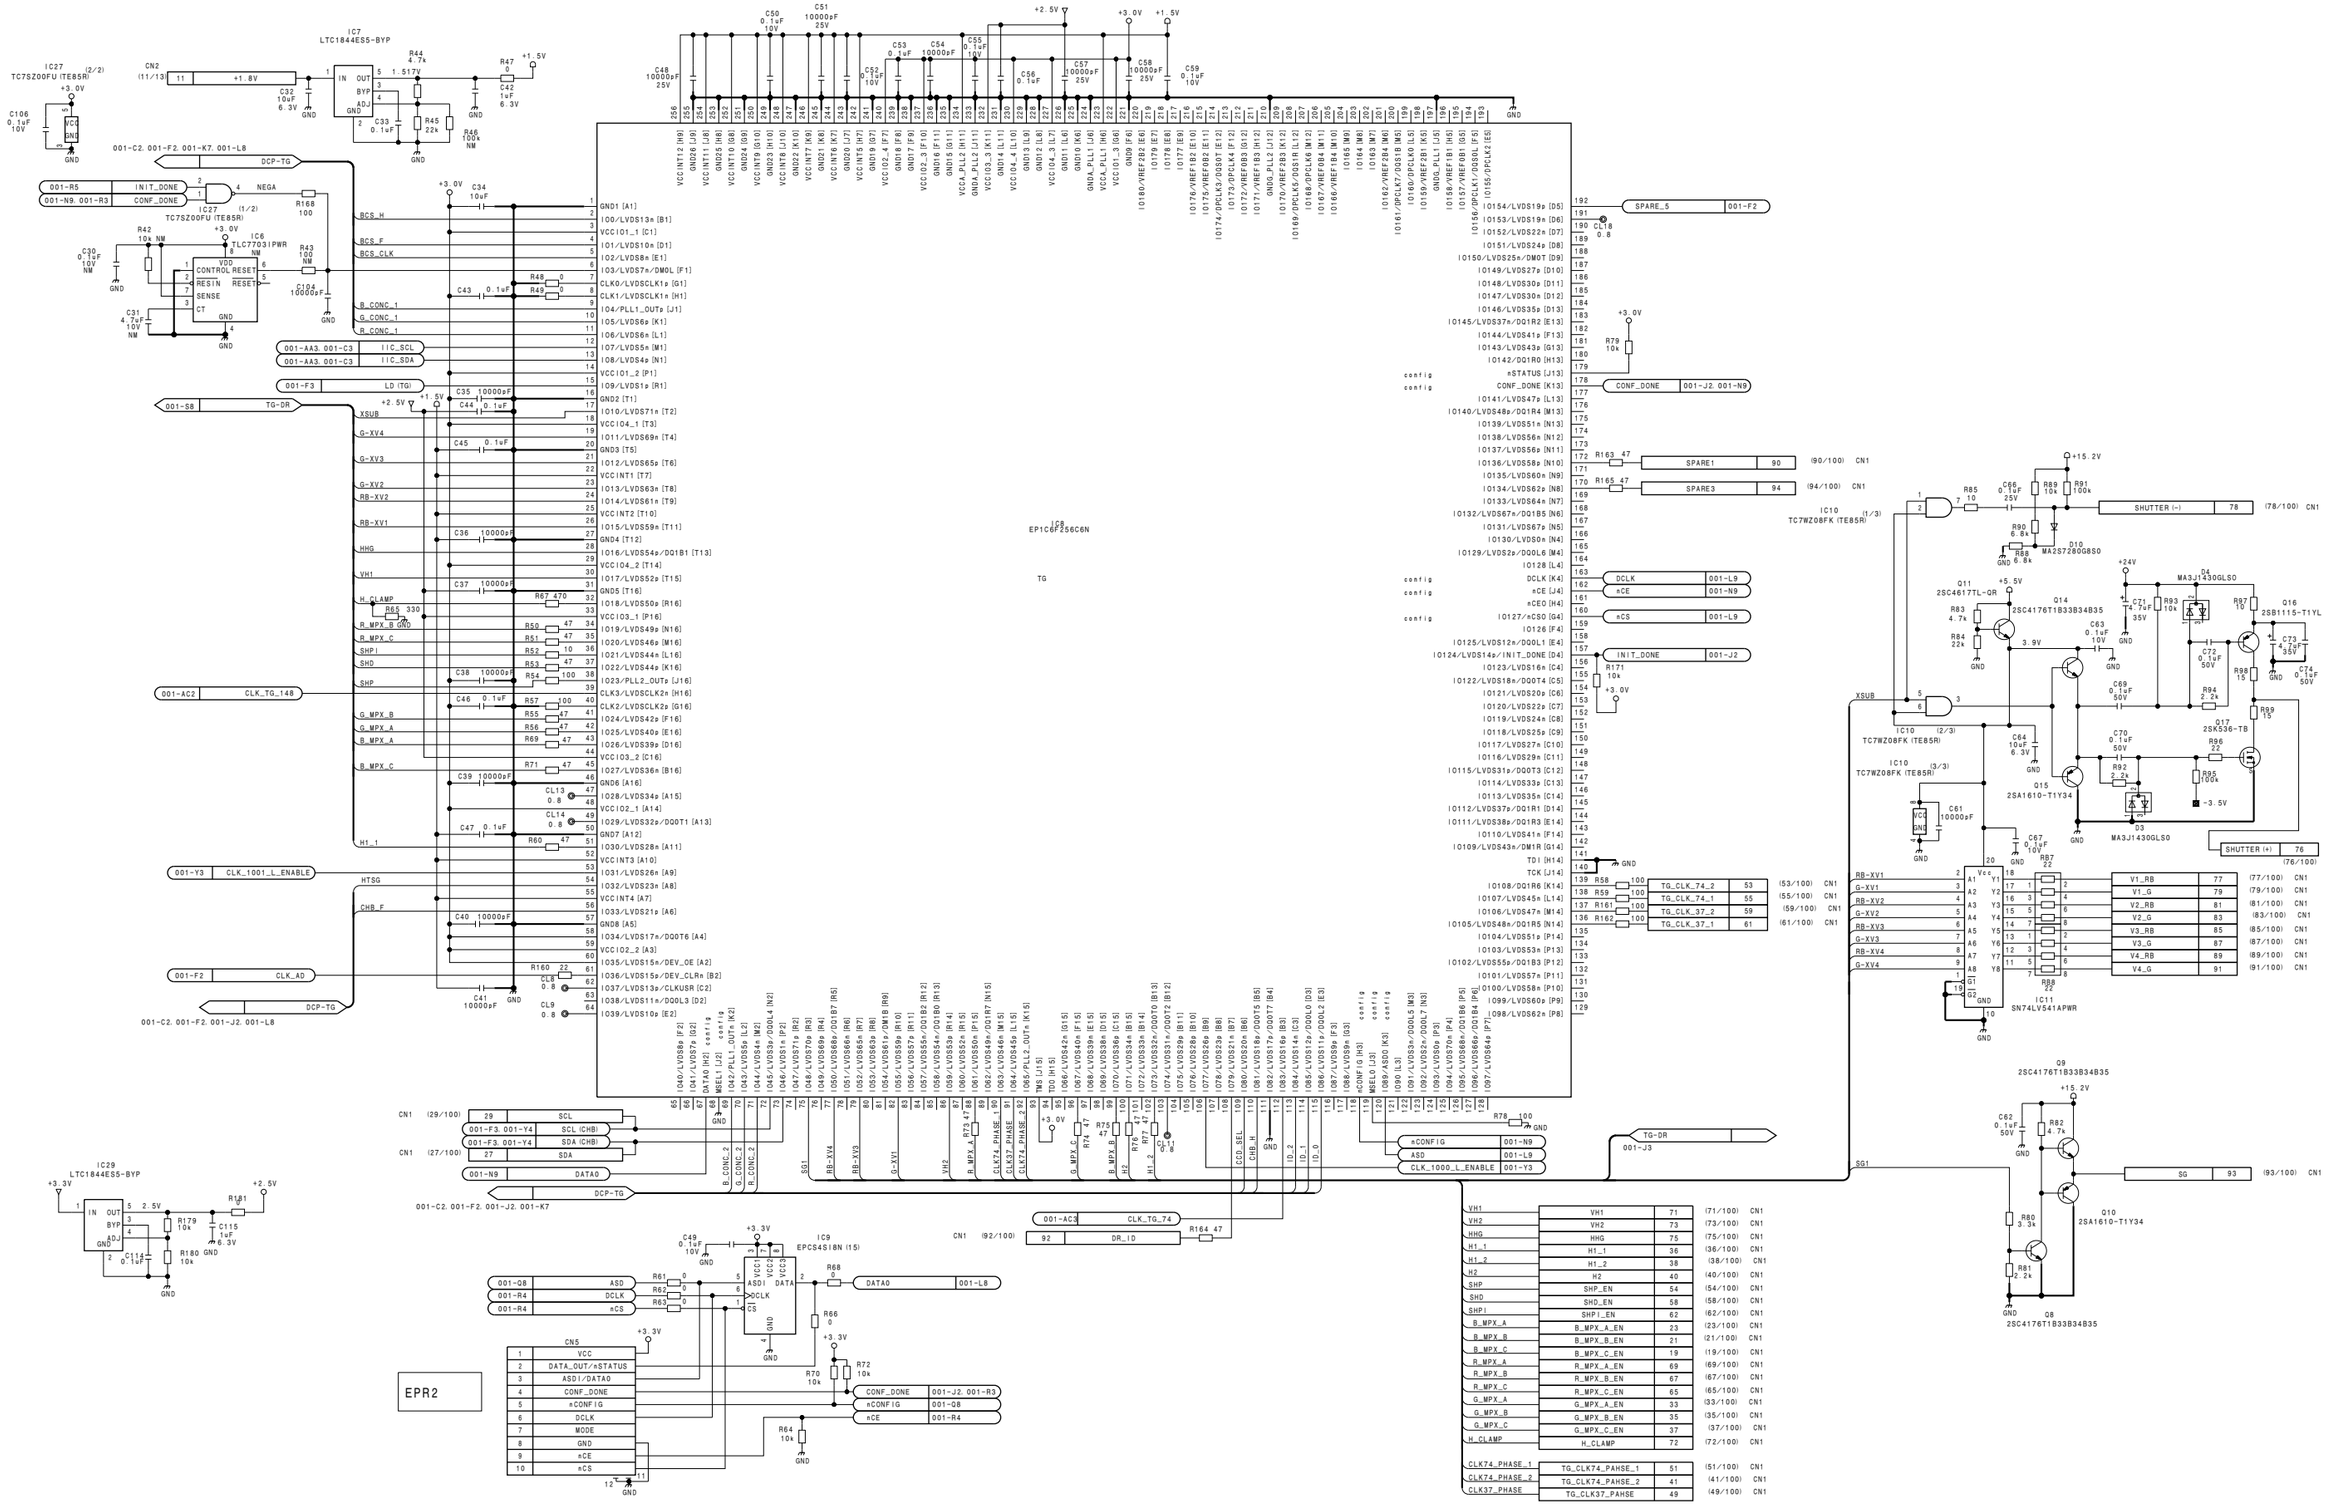
IC27 TC7SZ00FU (TE85R) (2/2)
IC7 LTC1844ES5-BYP
IC27 TC7SZ00FU (TE85R) (1/2)
IC6 TLC7703I(PWR
IC29 LTC1844ES5-BYP
IC9 EPC4S18N (15)
EP1C6F256C6N
IC10 TC7WZ08FK (TE85R) (1/3)
IC10 TC7WZ08FK (TE85R) (2/3)
IC10 TC7WZ08FK (TE85R) (3/3)
IC11 SN74LV541APWR
CN2
CN5
EPR2
001-C2. 001-F2. 001-K7. 001-L8
001-C2. 001-F2. 001-J2. 001-L8
001-C2. 001-F2. 001-J2. 001-K7
DCP-TG
TG
TG-DR
001-J3
SPARE_5
SPARE1
SPARE3
CONF_DONE
DCLK
INIT_DONE
SHUTTER (-)
SHUTTER (+)
SG
DR_ID
TG_CLK_74_2
TG_CLK_74_1
TG_CLK_37_2
TG_CLK_37_1
TG_CLK74_PAHSE_1
TG_CLK74_PAHSE_2
TG_CLK37_PAHSE
V1_RB
V1_G
V2_RB
V2_G
V3_RB
V3_G
V4_RB
V4_G
VH1
VH2
HHG
H1_1
H1_2
H2
SHP_EN
SHD_EN
SHPI_EN
B_MPX_A_EN
B_MPX_B_EN
B_MPX_C_EN
R_MPX_A_EN
R_MPX_B_EN
R_MPX_C_EN
G_MPX_A_EN
G_MPX_B_EN
G_MPX_C_EN
H_CLAMP
BCS_H
BCS_F
BCS_CLK
B_CONC_1
G_CONC_1
R_CONC_1
IIC_SCL
IIC_SDA
LD (TG)
TG-DR
CLK_TG_148
CLK_1001_L_ENABLE
CLK_AD
HTSG
CHB_F
H1_1
XSUB
SHP
SHD
SHPI
G_MPX_B
G_MPX_A
B_MPX_A
B_MPX_C
R_MPX_B
R_MPX_C
R_MPX_A
RB-XV4
RB-XV3
G-XV1
VH2
B_MPX_A
CLK74_PHASE_1
CLK74_PHASE_2
CLK37_PHASE
H_2
CCD_SEL
CHB_H
ID_2
ID_1
ID_0
SG1
ASD
DCLK
nCS
nCONFIG
nCE
DATA0
DATA_OUT/nSTATUS
ASDI/DATA0
CONF_DONE
nCONFIG
DCLK
MODE
GND
nCE
nCS
INIT_DONE
R171 10k
R79 10k
R78 100
R163 47
R165 47
R164 47
R168 100
R42 10k NM
R43 100 NM
R44 4.7k
R45 22k
R46 100k NM
R47 0
R48 0
R49 0
R50 47
R51 47
R52 10
R53 47
R54 100
R55 47
R56 47
R57 100
R58 100
R59 100
R60 47
R61 0
R62 0
R63 0
R64 10k
R65 330
R66 0
R67 470
R68 0
R69 47
R70 10k
R71 47
R72 10k
R73 47
R74 47
R75 47
R76 47
R77 47
R80 3.3k
R81 2.2k
R82 4.7k
R83 4.7k
R84 22k
R85 7.10
R87 10k
R88 6.8k
R89 10k
R90 6.8k
R91 100k
R92 2.2k
R93 10k
R94 2.2k
R95 100k
R96 22
R97 10
R98 15
R99 15
C30 0.1uF 10V NM
C31 4.7uF 10V NM
C32 10uF 6.3V
C33 0.1uF
C34 10uF
C35 10000pF
C36 10000pF
C37 10000pF
C38 10000pF
C39 10000pF
C40 10000pF
C41 10000pF
C42 1uF 6.3V
C43 0.1uF
C44 0.1uF
C45 0.1uF
C46 0.1uF
C47 0.1uF
C48 10000pF 25V
C49 0.1uF 10V
C50 0.1uF 10V
C51 10000pF 25V
C52 0.1uF 10V
C53 0.1uF 10V
C54 10000pF 25V
C55 0.1uF 10V
C56 0.1uF
C57 10000pF 25V
C58 10000pF 25V
C59 0.1uF 10V
C61 10000pF
C62 0.1uF 50V
C63 0.1uF 10V
C64 10uF 6.3V
C66 0.1uF 25V
C67 0.1uF 10V
C69 0.1uF 50V
C70 0.1uF 50V
C71 4.7uF 35V
C72 0.1uF 50V
C73 4.7uF 35V
C74 0.1uF 50V
C104 10000pF
C106 0.1uF 10V
C115 1uF 6.3V
C116 0.1uF
C117 0.1uF
C118 0.1uF
C119 0.1uF
C120 0.1uF
C121 0.1uF
D10 MA2S728QGBS0
D3 MA3J1430GLSO
Q4 MA3J1430GLSO
Q8 2SC4176T1B33B34B35
Q9 2SC4176T1B33B34B35
Q10 2SA1610-T1Y34
Q11 2SC4617TL-QR
Q14 2SC4176T1B33B34B35
Q15 2SA1610-T1Y34
Q16 2SB1115-T1YL
Q17 2SK536-TB
+3.0V
+2.5V
+1.5V
+1.8V
+3.3V
+5.2V
+15.2V
+24V
-3.5V
GND
3.9V

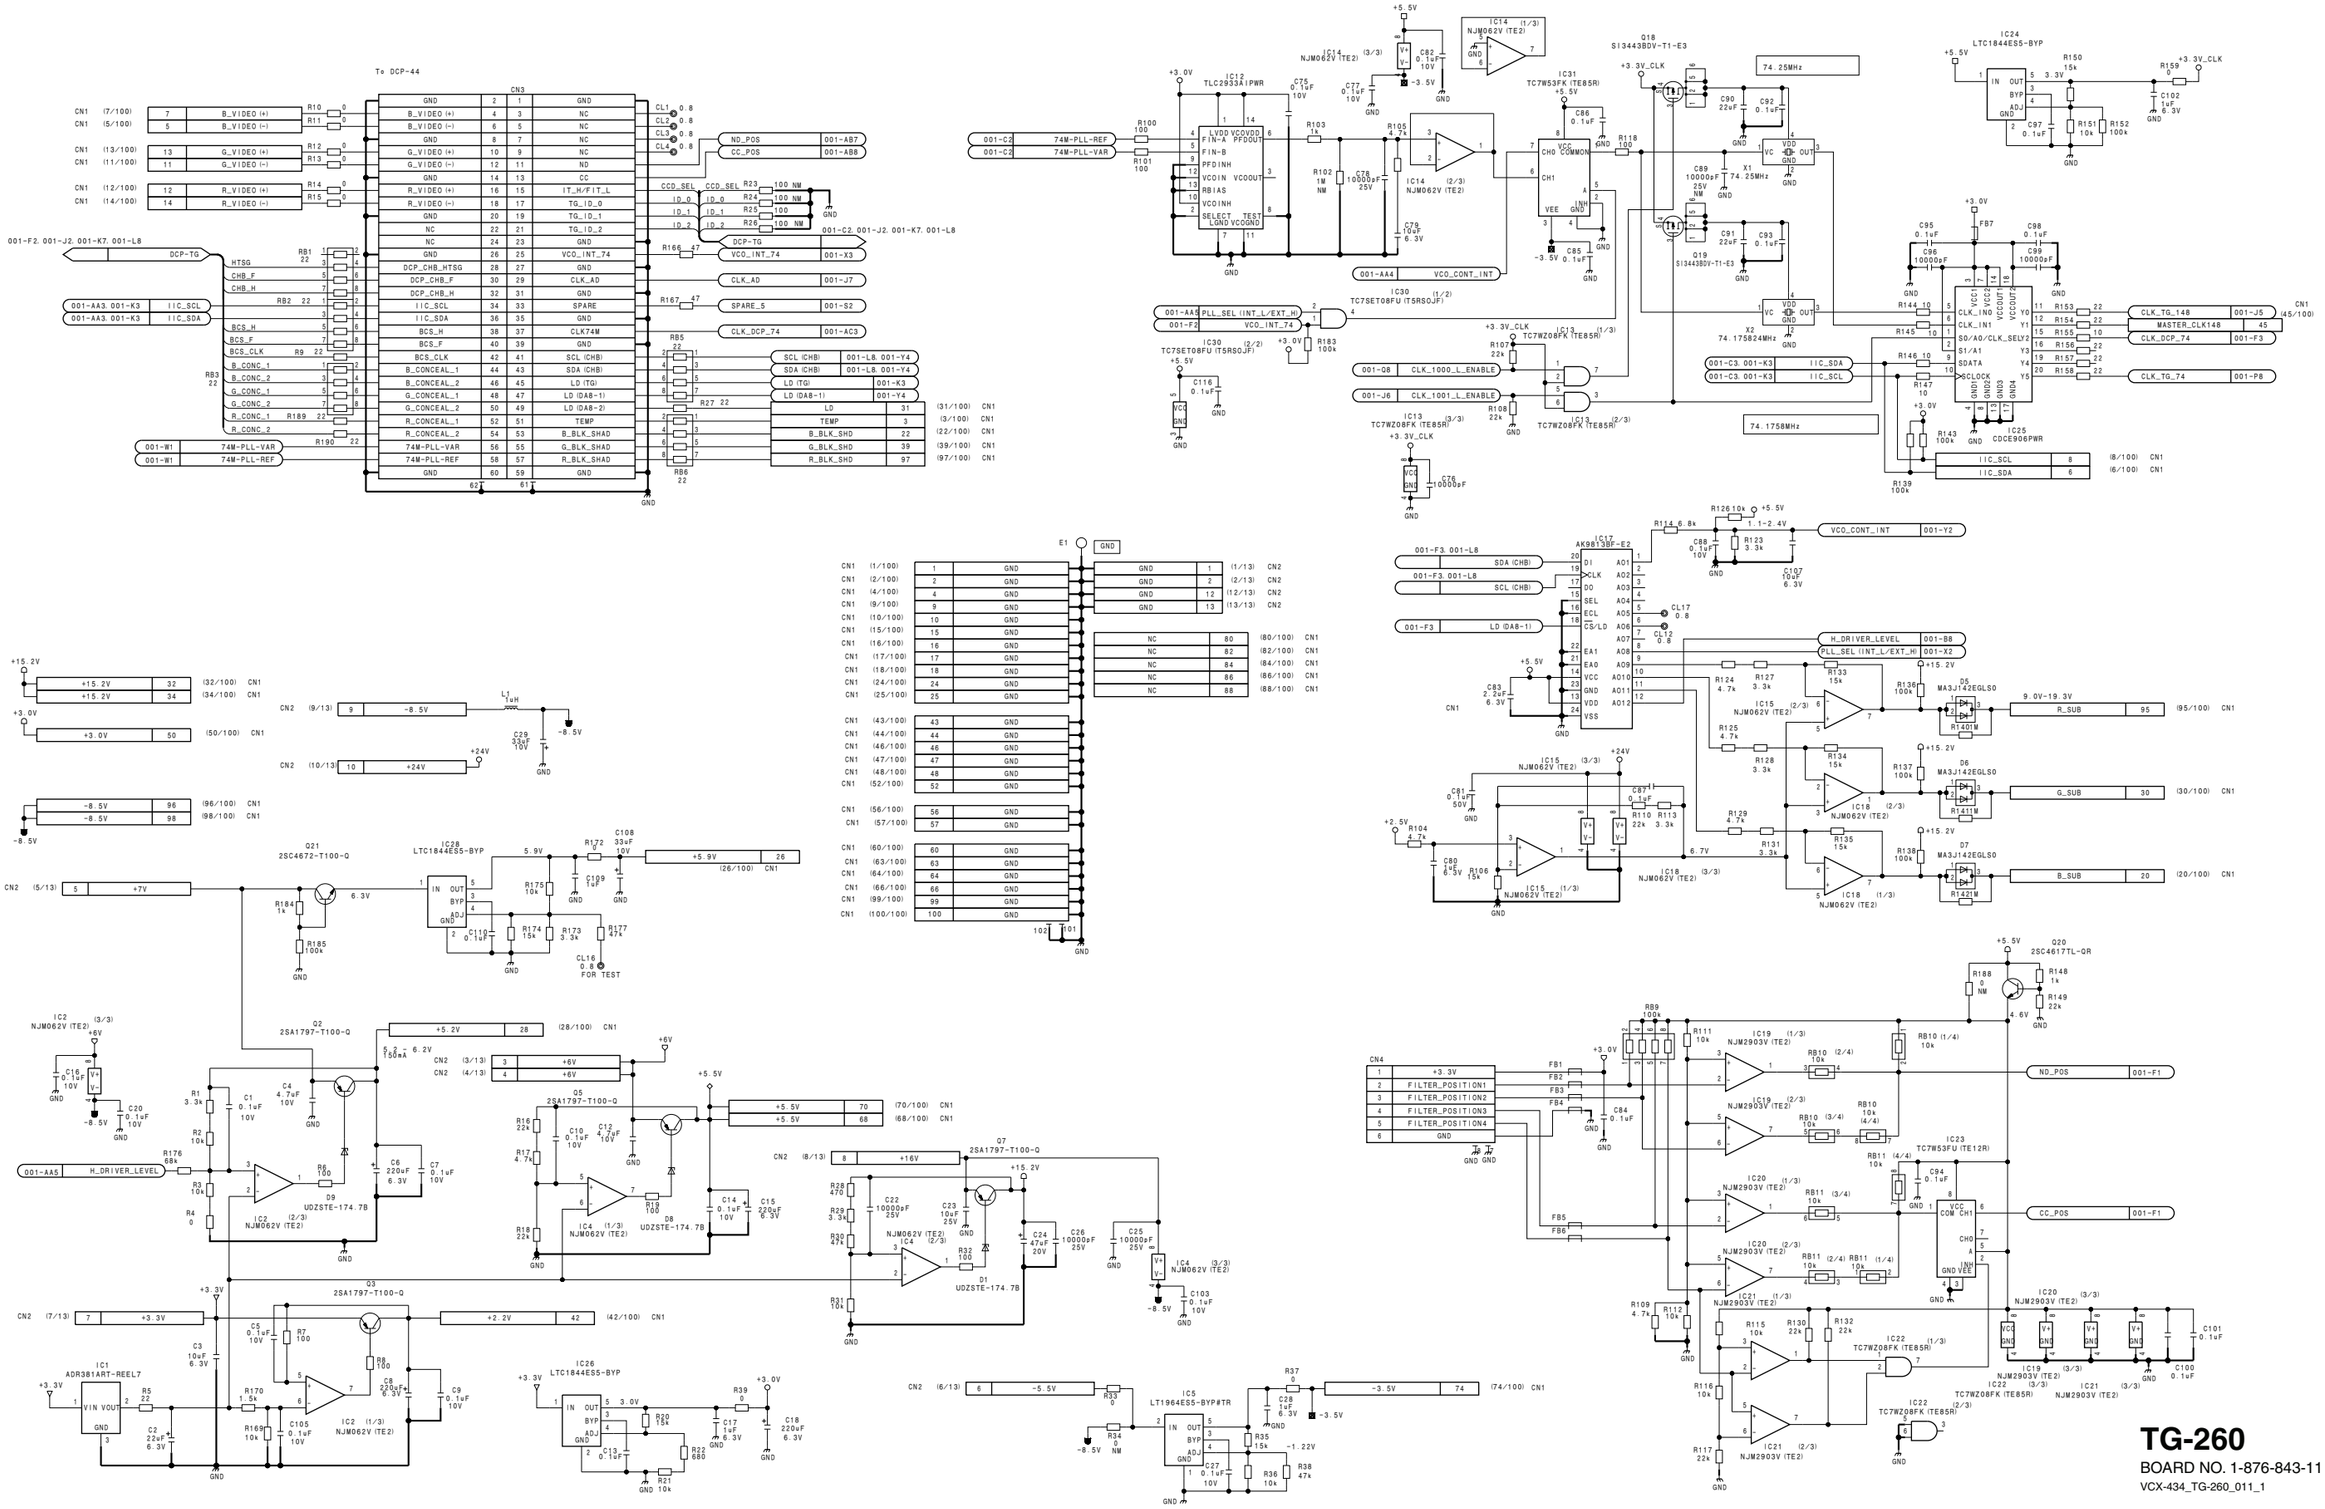

TG-260
BOARD NO. 1-876-843-11
VCX-434_TG-260_011_1


CBK-HD01 (SY)

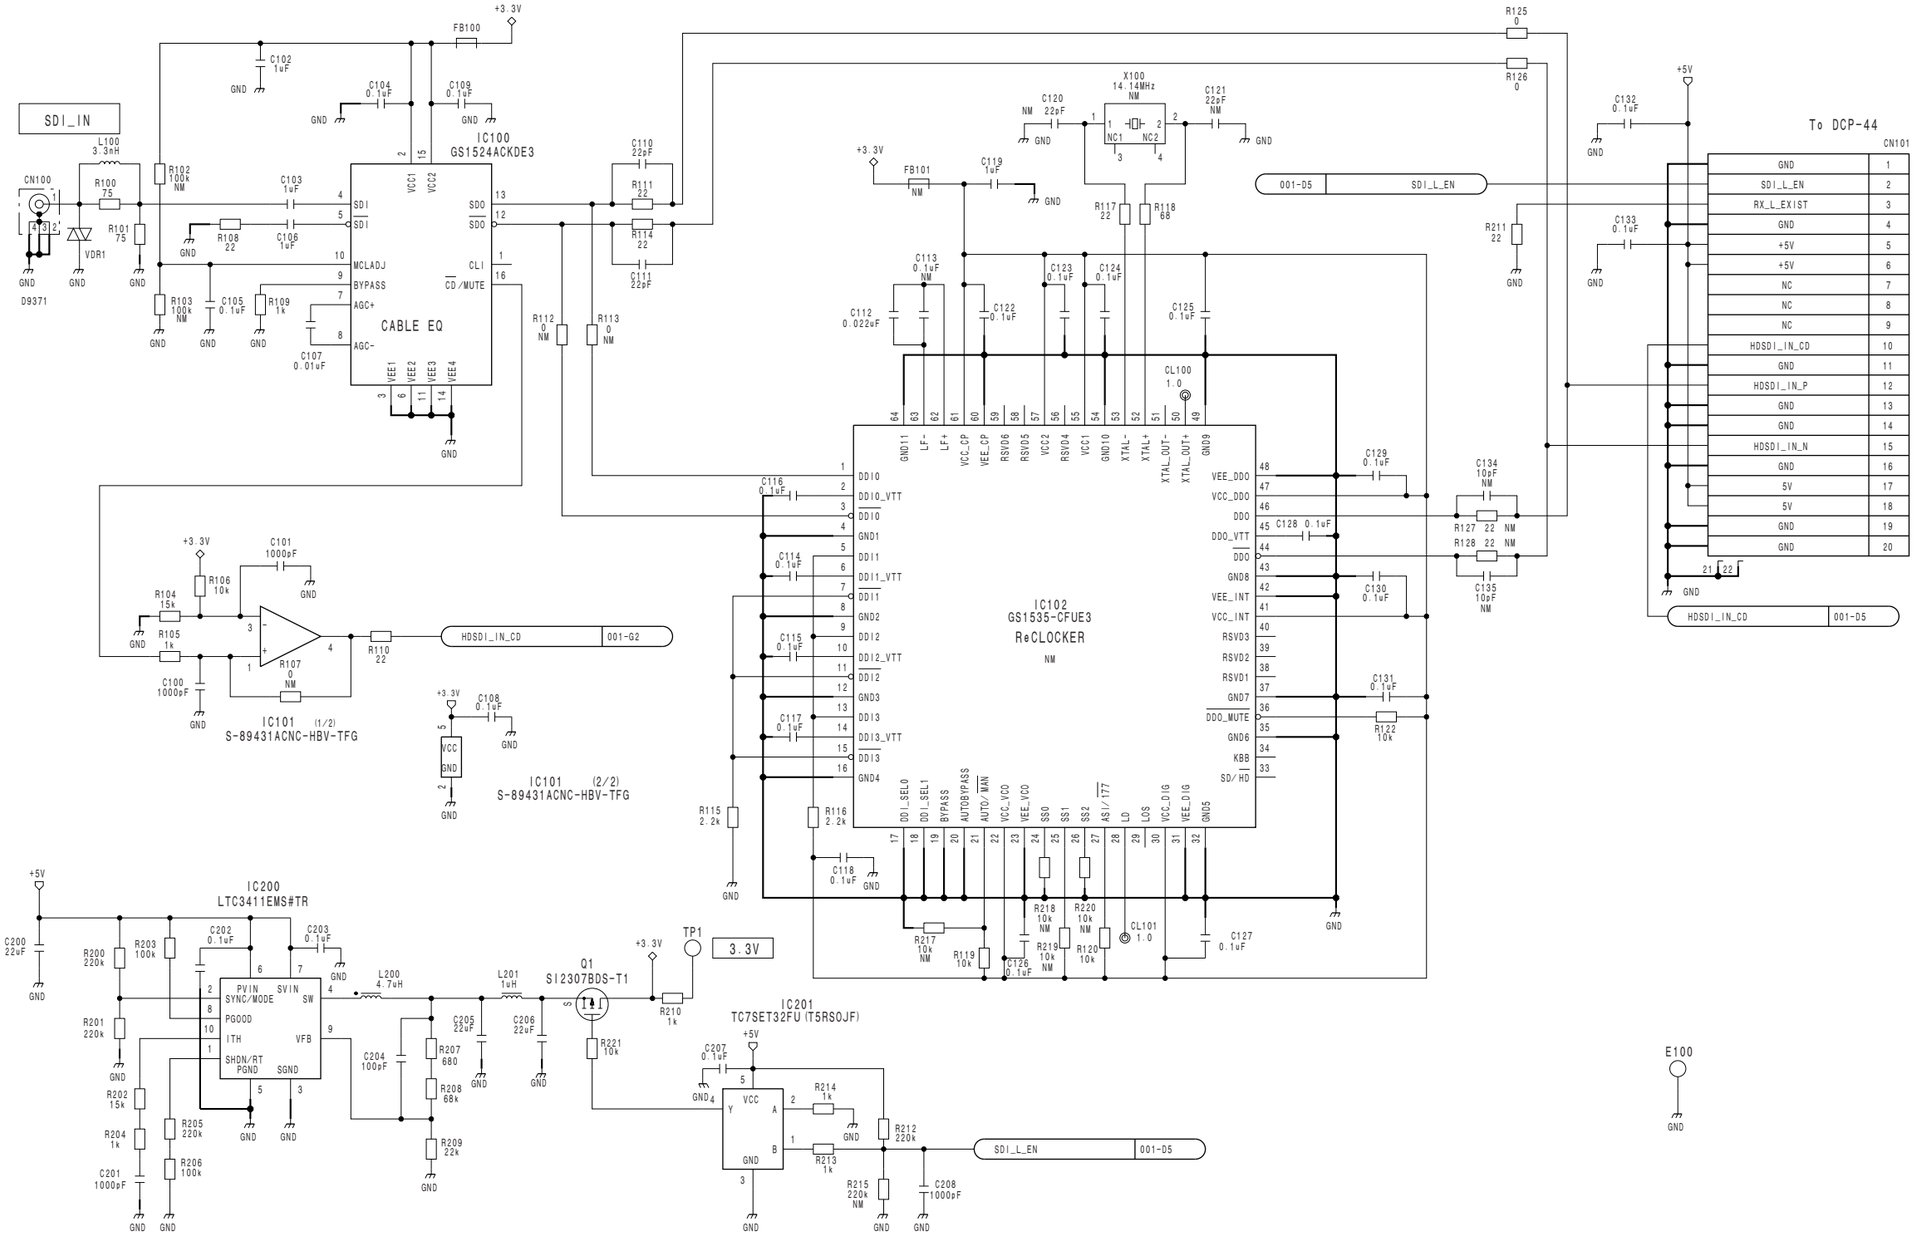

RX-105
BOARD NO. 1-876-917-11
VCX-434-1_RX-105_110_1

PDW-F800/V2 (J,E)

CBK-SC02 (SY)

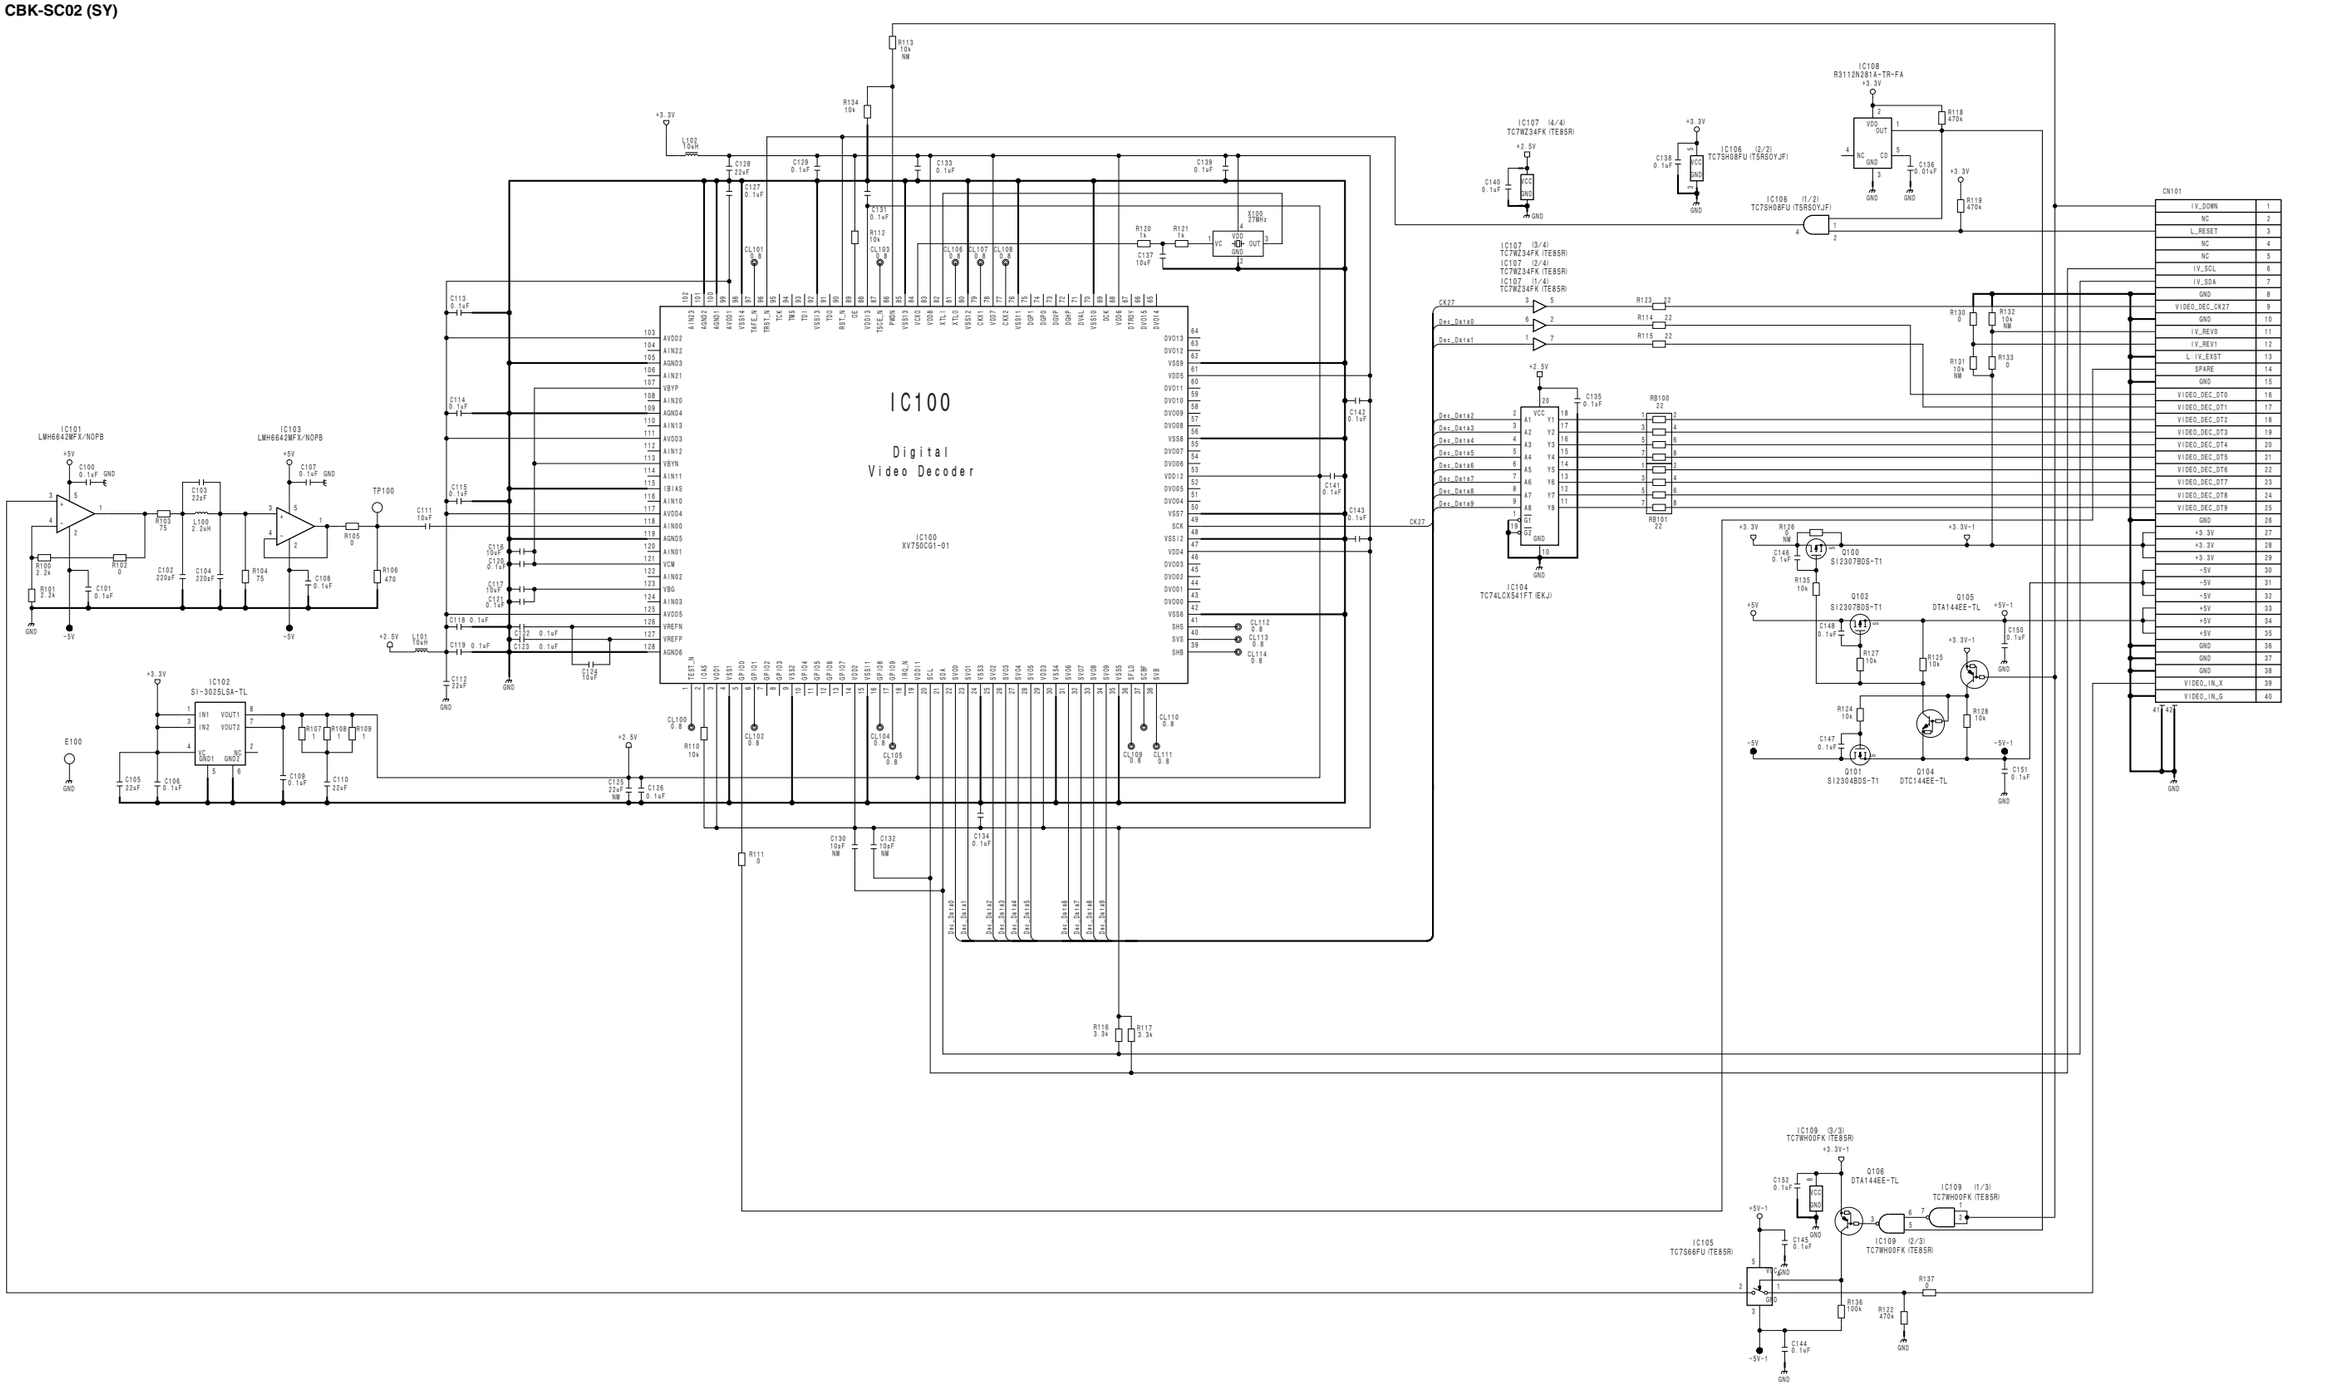

IV-59
BOARD NO. 1-876-918-11
VCX-434-1_IV-59_110_1


MB-1111
CN-3001
FRONT MIC
MIC IN
HARNESS SUB (FRONT AUDIO)
CN-3005
EXT LIGHT
LIGHT
HARNESS SUB (DDOUTLGT)
PS-731/CN5
DCP-44/CN3
HARNESS SUB (VF)
HARNESS SUB (HANDSW)
HANDLE SW x2 (ASSIGNABLE)
SW-1249
View Finder BDF-20WCE
SW-1426
LIGHT SW
HARNESS SUB (CN-SW)
HARNESS SUB (MB-CN)
CN110
MA-162
CN115
POWER SW
HARNESS SUB (POWER SW)
CN2
PLAY, STOP FF, REW, EJECT PREV, NEXT SW
KY-623
HARNESS SUB (KY)
CN112
LOADING MOTOR
EJECT SW
SW-1385
HARNESS SUB (EJECT)
CN114
FAN 2
FAN
CN121
FAN 1 (Controllable)
CN103
RX-101
FLEXIBLE CARD WIRE
CN109
HARNESS SUB (IO)
IO-235
CN101 TEST OUT
CN102 GENLOCK IN
CN103 EXT TC OUT
CN104 EXT TC IN
CN117
HARNESS SUB
RM-216
REMOTE
CN116
CN118
CN119
CN120
BATTERY
DC OUT 12V
DC IN
HARNESS SUB (BATT)
HARNESS SUB (DC OUT)
HARNESS SUB (DC IN)
PS-708
CNB-25
AUDIO OUT
CH2
CH1
CN302
CN201
CN101
CN403
AXM-38
CN7
S1 +48V ON/OFF
S2 +48V ON/OFF
SW-1352
DET-47
HARNESS SUB (PS-CNB)
PS-731
CN-3005/CN5 HARNESS SUB (PS-CN)
REC START
AUTO_W/B_BAL
SHUTTER
MIC LEVEL
SW-1425
HARNESS SUB (FRONT SW1)
MEMORY STICK
MS-86
FLEXIBLE CARD WIRE
CN111
HARNESS SUB (LENS)
CN-3025
2/3 Inch Lens control
AT-177/CN602
HARNESS SUB (IR)
IR-36
PA-344
(B)
PA-343A
(G)
PA-342A
(R)
Lens
Optical Filter
SE-803
DR-617
TG-260
HARNESS SUB (TG)
CN-2947
EPR2
SDI OUT (1)
SDI OUT (2)
MS JIG
AT-177
HARNESS SUB (MS)
MS-86/CN5
SDI IN
RX-105
(CBK-HD01)
VF Connector
DCP-49A
CI-37
DVP-45
SY-355
IM_II
LINUX
CPL-GTAG
I_CPL
MEMORY STICK
LCPU
ROM-JIG
IV-59
(CBK-SC02)
HARNESS SUB
BRD-P100
OPTICAL BLOCK
DR-606
SE-709
LOADING MOTOR
HARNESS SUB (HN-292-SE709)
FAN
SE-857
SPINDLE MOTOR
DEW SENSOR
SW-1125G
SE-858
SEEK MOTOR
CN-2946
HARNESS SUB (ILINK)
CN-2948
DV IN/OUT S400
CN-3026
USB2
HARNESS SUB
FP-157
CN801
CN105
CN106
CN107
CN108
RE-246
PD-118
HARNESS SUB (TOOL)
Tool
16 x 9 LCD Panel
Back Light Module
HARNESS SUB (LCD7)
PANEL OPEN SENSOR
DET-45
S1
PANEL REVERSE
HARNESS SUB (SPEAKER)
Side Speaker
PC
LED-444
BACK TALLY
TALLY ON/OFF SW
HARNESS SUB (HP103)
HP-149
EARPHONE
HARNESS SUB (HP104)
HP-148
J1
EARPHONE
HARNESS SUB (RE)
ENC-118
ROTALY SW
HARNESS SUB
SW-1391
INSIDE PANEL ASSIGNABLE SW (6)

Section 4
Board Layouts


Index

Board Name	Page
AT-177	4-2
AXM-38	4-2
CI-37	4-3
CN-2946	4-3
CN-2947	4-3
CN-2948	4-3
CN-3001	4-3
CN-3005	4-3
CN-3025	4-3
CN-3026	4-3
CNB-25	4-4
DCP-49A	4-5
DET-45	4-7
DET-47	4-7
DR-606	4-7
DR-617	4-7
DVP-45	4-8
ENC-118	4-10
FP-157	4-10
HP-148	4-11
HP-149	4-11
IO-235	4-13
KY-623	4-13
LED-444	4-13
MA-162	4-13
MB-1111	4-14
MS-86	4-14
PA-342A	4-15
PA-343A	4-15
PA-344	4-15
PD-118	4-16
PS-708	4-16
PS-731	4-16
RE-246	4-17
RM-216	4-17
RX-101	4-17
SE-709	4-17
SE-803	4-18
SE-857	4-18
SE-858	4-18

Board Name	Page
SW-1125G	4-18
SW-1249	4-18
SW-1352	4-18
SW-1385	4-18
SW-1391	4-18
SW-1425	4-19
SW-1426	4-19
SY-355	4-19
TG-260	4-21
RX-105 (CBK-HD01)	4-22
IV-59 (CBK-SC02)	4-22

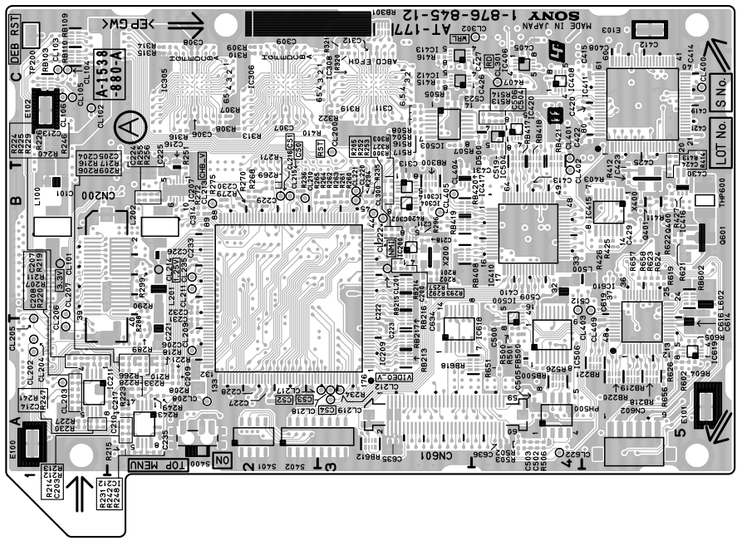


AT-177 -A SIDE-
SUFFIX: -12

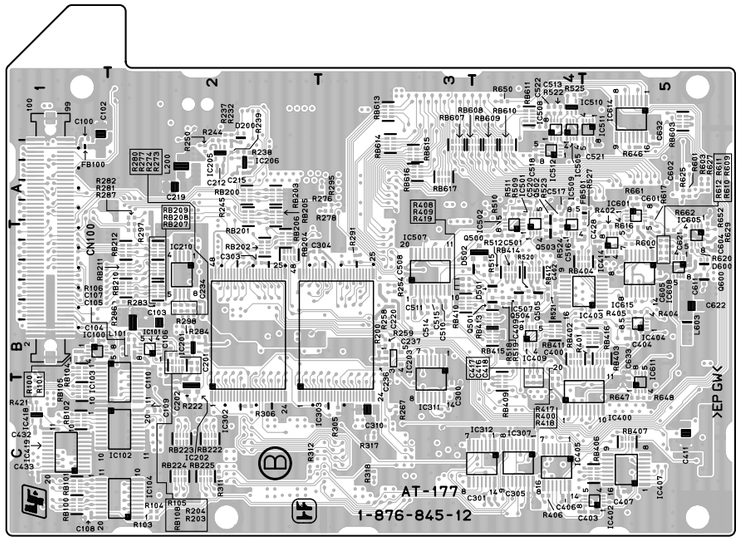


AT-177 -B SIDE-
SUFFIX: -12

AT-177 (1-876-845-12)
---
*:B SIDE

C100	*A1	C428	*B5	CN602	A5	L500	B5	R268	B2	R514	C4	RB409	*C4
C101	B1	C429	B5			L602	B5	R269	B2	R515	*B4	RB410	*B3
C102	*A1	C430	B5	D200	*A2	L603	*B5	R270	B2	R516	C3	RB411	*B4
C103	*B2	C431	B3	D500	C4			R271	B2	R517	C3	RB412	*B4
C104	*B1	C432	*C1	D501	*B4	PH500	A4	R272	B2	R518	*B4	RB413	*B4
C105	*B2	C433	*C1	D502	*B4			R273	*B2	R519	*B4	RB414	*B4
C106	*B2	C500	A4	D600	*B5	Q400	B5	R274	*B2	R520	*B4	RB415	*B4
C107	*B2	C501	*B4			Q401	B5	R275	B2	R521	*B4	RB416	*B5
C108	*C1	C502	A4	E100	A1	Q500	*B4	R276	*A3	R522	*A4	RB417	C4
C109	*C2	C503	A4	E101	A5	Q501	*B4	R277	*B2	R523	*A4	RB418	C4
C110	*B2	C504	C4	E102	C1	Q502	*A4	R278	*A3	R524	*B4	RB419	B3
C200	B3	C505	A4	E103	C5	Q503	*B4	R279	B2	R525	*A4	RB420	B3
C201	*B2	C506	C4			Q504	*B4	R280	*B2	R526	A4	RB421	C4
C202	*C2	C507	*B4	FB100	*A1	Q505	*B4	R281	*A2	R527	*B5	RB500	A4
C203	A2	C508	*B3	FB500	A4	Q600	*B5	R282	*A2	R600	*B5	RB602	B5
C204	A2	C509	B4	FB501	*A5	Q601	B5	R283	*B2	R601	*A5	RB603	*A5
C205	A2	C510	*B3					R284	*B2	R602	A5	RB607	*A3
C206	A2	C511	*B3	IC100	*B1	R100	*B1	R286	*B2	R603	*A5	RB608	*A4
C207	A1	C512	B4	IC101	*B2	R101	*B1	R287	*B2	R604	A5	RB609	*A4
C208	A1	C513	*A4	IC102	*C2	R103	*C2	R288	A2	R605	A5	RB610	*A4
C209	A2	C514	*B3	IC103	*C2	R104	*C2	R289	A2	R609	*B5	RB611	*A4
C210	A2	C515	*B3	IC104	*C2	R105	*B2	R290	B2	R610	*B5	RB612	A3
C211	B3	C516	*B4	IC200	B3	R106	*B2	R291	*B3	R611	*B5	RB613	*A3
C212	*A2	C517	*A4	IC201	*B2	R200	*B3	R292	B3	R612	*B5	RB614	*A3
C213	A1	C518	*A4	IC202	*C2	R201	B3	R293	B3	R616	*B5	RB615	*A3
C214	A1	C519	C4	IC203	*B3	R202	B3	R294	B3	R617	*A5	RB616	*A3
C215	*A2	C520	*A4	IC205	*A2	R203	*B2	R295	*A3	R619	B5	RB617	*A3
C216	B2	C521	*A5	IC206	*A2	R204	*B2	R296	B3	R620	*B5	RB618	A4
C217	A2	C522	*A4	IC207	B2	R205	B3	R297	*B2	R621	B5		
C218	B3	C523	C3	IC209	B2	R206	A2	R298	*B2	R622	B5	S400	A2
C219	*A2	C601	*A5	IC210	*B2	R207	A1	R299	B2	R623	B5	S401	A2
C220	*B3	C602	*A5	IC211	A1	R208	A2	R300	B3	R624	B5	S402	A3
C221	A2	C604	*B5	IC212	A2	R209	A2	R303	B3	R625	*A5		
C222	A3	C605	*B5	IC301	B3	R210	A2	R305	*C3	R626	A5	THP600	B5
C223	A3	C611	*B5	IC302	*B2	R211	A1	R306	*C2	R627	*A5		
C224	B2	C614	A5	IC303	*B3	R212	A2	R307	C2	R629	*B5	TP200	C1
C225	B2	C616	A5	IC304	B3	R213	A2	R308	C2	R646	*A5		
C226	B2	C619	A5	IC305	C2	R214	A2	R309	C2	R647	*C5	X200	B3
C227	A2	C621	*B5	IC306	C2	R215	A2	R310	C2	R648	*C5	X400	B5
C228	A2	C622	*B5	IC307	*C4	R216	A2	R311	*C2	R650	*A4		
C229	B2	C632	*A5	IC308	C3	R217	A2	R312	*C2	R651	A4		
C230	B2	C633	*B5	IC311	*C3	R218	A2	R313	C2	R652	*A5		
C231	A2	C634	A3	IC312	*C4	R219	A1	R314	C2	R656	A5		
C232	B2	C635	A3	IC400	*C5	R220	A1	R315	C2	R657	B5		
C233	B2	C636	A4	IC402	*C5	R221	A2	R316	C2	R658	B5		
C234	*B2			IC403	*B5	R222	*C2	R317	*C3	R661	*A5		
C235	A2	CL101	B1	IC404	*B5	R223	A2	R318	*C3	R662	*B5		
C236	*B3	CL102	C1	IC405	*C4	R224	A1	R319	C3				
C237	*B3	CL103	C1	IC406	C4	R225	A1	R320	C3	RB100	*C1		
C300	*C3	CL104	C1	IC407	*C5	R226	A1	R321	C3	RB101	*C1		
C301	*C4	CL105	C1	IC408	C4	R227	A1	R322	C3	RB102	*C1		
C302	B3	CL106	C1	IC409	*B4	R228	A2	R327	B3	RB103	C1		
C303	*B2	CL200	C3	IC410	B4	R229	A1	R400	*C4	RB104	*B1		
C304	*B2	CL201	B3	IC411	C5	R230	A1	R401	*B5	RB105	*C1		
C305	*C4	CL202	A1	IC412	C3	R231	A2	R402	*B5	RB108	*B2		
C306	C2	CL203	A1	IC413	C3	R232	*A2	R403	B5	RB109	C1		
C307	C2	CL204	A1	IC414	*B5	R233	A2	R404	*B5	RB110	C1		
C308	C2	CL205	A1	IC415	B5	R234	A3	R405	*B5	RB200	*A2		
C309	C2	CL206	A1	IC416	B5	R235	B3	R406	*C4	RB201	*A2		
C310	*C3	CL207	B1	IC417	B3	R236	B2	R407	C4	RB202	*B2		
C311	C3	CL208	A2	IC418	*C1	R237	*A2	R408	*B3	RB203	*A2		
C312	C3	CL209	A2	IC419	*C1	R238	*A2	R409	*B3	RB204	*B2		
C313	B3	CL210	B2	IC420	C4	R239	*A2	R410	C3	RB205	*A2		
C314	B2	CL211	B2	IC500	B4	R240	A1	R411	B5	RB206	*B2		
C400	*B4	CL212	A3	IC501	*A4	R241	A1	R412	B5	RB207	*B2		
C402	*B4	CL213	B2	IC502	*B4	R242	A2	R413	C5	RB208	*B2		
C403	*C5	CL214	B2	IC503	C3	R243	A2	R414	C5	RB209	*B2		
C404	*B5	CL215	B2	IC504	C4	R244	*A2	R415	C3	RB210	*B2		
C405	C4	CL216	B2	IC505	*A4	R245	*A2	R416	C3	RB211	*B2		
C406	*C4	CL217	A3	IC506	A4	R246	A1	R417	*B4	RB212	*B2		
C407	*C5	CL218	A3	IC507	*B3	R247	A1	R418	*C4	RB213	A3		
C408	C5	CL219	A3	IC508	*A4	R248	A2	R419	*B3	RB214	B3		
C409	*B4	CL220	B3	IC509	*B4	R249	A2	R420	B3	RB215	B3		
C410	B4	CL221	B3	IC510	*A4	R250	*A2	R421	*C1	RB216	A3		
C411	*C5	CL222	B3	IC511	*A5	R251	B2	R425	B5	RB217	A3		
C412	C5	CL235	B2	IC512	*A4	R252	B3	R426	B5	RB218	A5		
C413	B4	CL300	B3	IC601	*A5	R253	B3	R427	B5	RB219	A5		
C414	C5	CL301	C4	IC605	*B5	R254	*B3	R500	A4	RB220	A5		
C415	C5	CL302	C4	IC608	*B5	R255	B2	R501	A4	RB221	A5		
C416	*C4	CL400	C5	IC610	A5	R256	B2	R502	A4	RB222	*C2		
C417	*C4	CL401	C4	IC611	*C5	R257	B3	R503	A4	RB223	*C2		
C418	*C4	CL402	B4	IC614	*A5	R258	*B3	R504	C3	RB224	*C2		
C419	C5	CL403	B4	IC615	*B5	R259	*B3	R505	C3	RB225	*C2		
C420	C5	CL404	B3	IC618	A3	R260	B3	R506	A4	RB300	B3		
C421	C5	CL405	B3	IC619	A5	R261	B3	R507	C3	RB301	C3		
C422	C5	CL409	B5			R262	B3	R508	C3	RB402	*B4		
C423	B5	CL622	A4	L100	B1	R263	B3	R509	*A4	RB403	*B5		
C424	B5			L101	*B2	R264	B3	R510	*A4	RB404	*B5		
C425	C5	CN100	*B1	L200	*A2	R265	B2	R511	*A4	RB406	*C5		
C426	C3	CN200	B1	L201	B2	R266	A2	R512	*B4	RB407	*C5		
C427	C3	CN601	A3	L202	B2	R267	*C3	R513	C4	RB408	B3		

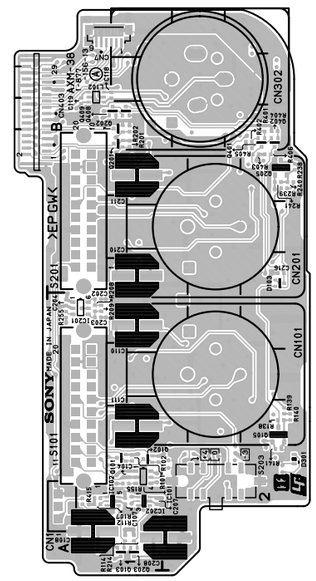

AXM-38 -A SIDE-
SUFFIX: -13

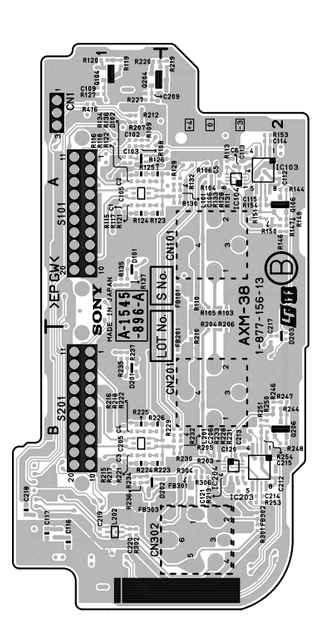


AXM-38 -B SIDE-
SUFFIX: -13


AXM-38 (1-877-156-13)
---
*:B SIDE

C1	*A1	Q204	*A1	R236	*B1	C215	*B2	R133	*A2				
C2	*A1	Q205	B2	R237	*B1	C216	B2	R134	*A1				
C3	*B1	Q206	*B2	R238	B2	C217	*B2	R135	*A1				
C4	*B1	Q401	B2	R239	B2	C218	*B1	R136	*A1				
C5	*A2	Q402	B2	R240	B2	C219	*B1	R137	*A1				
C6	*A2	Q408	B1	R241	B2	C220	*B1	R138	A2				
C102	*A1	Q409	B1	R244	*B2			R139	A2				
C103	*A1			R246	*B2	CN1	A1	R140	A2				
C104	A1	R101	A1	R247	*B2	CN7	B1	R141	A2				
C105	*A1	R102	A1	R248	*B2	CN101	A2	R144	*A2				
C106	*A1	R103	*A2	R250	*B2	CN201	B2	R146	*A2				
C107	A1	R104	*A2	R251	*B2	CN301	B2	R147	*A2				
C108	A1	R105	*A2	R253	*B2	CN302	B2	R148	*A2				
C109	*A1	R106	*A2	R254	*B2	CN403	B1	R150	*A2				
C110	A1	R107	A1	R255	A1			R151	*A2				
C111	A1	R108	*A1	R301	*B2	D101	*A1	R153	*A2				
C112	*A2	R109	*A1	R302	*B1	D102	*A1	R154	*A2				
C113	*A2	R110	*A2	R304	*B2	D103	B2	R155	A1				
C114	*A2	R112	A1	R306	*B2	D201	*B1	R201	B1				
C115	*A2	R113	*A2	R401	B2	D202	*B1	R202	B1				
C116	*B1	R114	A1	R402	B2	D203	*B2	R203	*B2				
C117	*B1	R115	*A1	R403	B2	D301	A2	R204	*B2				
C118	B1	R116	*A1	R404	B2			R205	*B2				
C119	B1	R117	*A1	R405	B2	FB101	*A2	R206	*B2				
C120	*B2	R118	*A1	R406	B2	FB201	*B2	R207	*A1				
C121	*B2	R119	*A1	R415	A1	FB301	*B2	R208	A1				
C202	A1	R120	*A1	R416	*A1	FB302	*B2	R209	A1				
C203	A1	R121	*A1			FB303	*B1	R210	*B2				
C204	A1	R122	*A1	S101	A1			R212	*A1				
C205	*B1	R123	*A1	S201	B1	IC101	A1	R213	*B2				
C206	*B1	R124	*A1	S203	A2	IC102	A1	R214	A1				
C207	A1	R125	*A1			IC103	*A2	R215	*B1				
C208	A2	R126	*A1			IC104	*A2	R216	*B1				
C209	*A1	R127	*A1			IC201	A1	R217	*B1				
C210	B1	R128	*A2			IC202	A1	R218	*B1				
C211	B1	R129	*A2			IC203	*B2	R219	*A2				
C212	*B2	R130	*A2			IC204	*B2	R220	*A1				
C213	*B2	R131	*A2					R221	*B1				
C214	*B2	R132	*A2			L101	*A1	R222	*B1				
						L102	B1	R223	*B1				
						L201	*B1	R224	*B1				
						L202	*B1	R225	*B1				
								R226	*B1				
						Q101	A1	R227	*A1				
						Q102	A1	R228	*B2				
						Q103	A1	R229	*B2				
						Q104	*A1	R230	*B2				
						Q105	A2	R231	*B2				
						Q106	*A2	R232	*B2				
						Q201	B1	R233	*B2				
						Q202	B1	R234	*B1				
						Q203	A1	R235	*B1				

CI-37, CN-2946, CN-2947, CN-2948, CN-3001, CN-3005, CN-3025, CN-3026




CI-37 -A SIDE-
SUFFIX: -12




CI-37 -B SIDE-
SUFFIX: -12

CI-37 (1-876-851-12)
---
*:B SIDE


C1	A1	CN3	A1	R3	A1
C2	A1	CN4	A1	R18	*A1
C3	*A1				
C4	*A1	FB1	*A1	RB1	*A1
C5	*A1	FB2	A1	RB2	*A1
C6	*A1	FB3	A1	RB3	*A1
C7	*A1	FB4	A1	RB4	*A1
C8	*A1	FB5	A1	RB5	*A1
C9	*A1	FB6	A1	RB6	*A1
C10	*A1	FB7	A1		
C11	A1	FB8	A1		
C23	A1	FB9	A1		
C24	A1				
		IC1	A1		
CN1	A1	IC2	A1		
CN2	A1	IC3	A1		




CN-3001 -A SIDE-
SUFFIX: -11



CN-3001 -B SIDE-
SUFFIX: -11




CN-2946 -A SIDE-
SUFFIX: -11




CN-2946 -B SIDE-
SUFFIX: -11

CN-2946 (1-876-849-11)
---
*:B SIDE

C1	B2	D1	B1	R16	B1
C2	B2			R17	*B2
C3	B2	E1	B1	R18	*B2
C4	B2	E2	*B1	R19	*B2
C5	*B2			R20	*B2
C6	*B2	FB1	B2	R21	A2
C7	*B2	FB2	*B2	R22	A2
C8	A2			R23	A2
C9	A2	IC1	B2	R24	A2
C10	*A2			R25	A1
C11	*B2	L1	A2	R26	A1
C12	A2	L2	A1	R27	A2
C13	*A1			R28	A2
C14	*A2	R1	*A2	R30	A2
C15	A2	R2	*A2	R31	A2
C16	A2	R3	*A2	R33	B2
		R4	*A2		
CL1	B1	R5	*A2	RB1	*B2
CL2	B1	R6	*A2	RB2	B1
CL3	A1	R7	*A2	RB3	B2
CL4	A1	R8	*A2	RB4	B1
CL5	A1	R9	*A2		
CL6	A2	R12	B2	S1	B1
		R13	B2		
CN1	A2	R14	B2	X1	B2
CN2	A2	R15	B1		




CN-3005 -A SIDE-
SUFFIX: -12




CN-3005 -B SIDE-
SUFFIX: -12

CN-3005 (1-876-830-12)
---
*:B SIDE


C5	*A2	FL2	*B2	R19	*B1
C6	*B1	FL3	*B1	R20	*B1
C7	*B2	FL4	*B1	R21	*B1
C8	*B2	FL5	*B1	R33	*B2
C11	*B1	FL6	*B1	R34	*B2
C13	*B2	FL7	*B1	R35	*B2
C16	*B1	FL8	*B1	R37	*B2
C17	*B1			R38	*A1
C18	*A1	IC1	*B1	R39	*B1
C19	*B1	IC2	*A1		
		IC3	*B2	SL1	*A2
CN1	B1	Q20	*A2		
CN2	B1				
CN3	A1	R1	*B1		
CN4	B1	R2	*A1		
CN5	B1	R5	*A2		
CN6	A2	R15	*A2		
		R16	*A1		
D5	*A2	R17	*A1		
D6	*A2	R18	*B1		




CN-2947 -A SIDE-
SUFFIX: -11




CN-2947 -B SIDE-
SUFFIX: -11




CN-2948 -A SIDE-
SUFFIX: -11




CN-2948 -B SIDE-
SUFFIX: -11




CN-3025 -A SIDE-
SUFFIX: -11




CN-3025 -B SIDE-
SUFFIX: -11




CN-3026 -A SIDE-
SUFFIX: -11



CN-3026 -B SIDE-
SUFFIX: -11

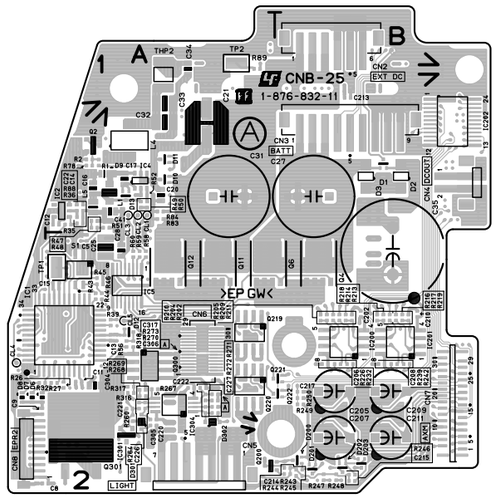


CNB-25 -A SIDE-
SUFFIX: -11

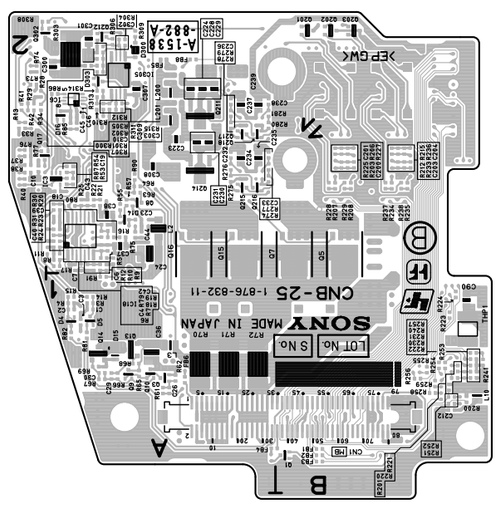


CNB-25 -B SIDE-
SUFFIX: -11

CNB-25 (1-876-832-11)
---
*:B SIDE

C1	*A1	C308	*A2	Q16	*A2	R71	*A1	R275	*A2
C2	*A1	C309	*A2	Q17	*A2	R72	*A1	R276	*A2
C3	*A1	C310	*A2	Q200	A2	R73	*A2	R277	*A2
C4	*A2	C317	A2	Q201	*B2	R74	*A2	R278	*A2
C5	A2			Q202	*B2	R75	*A2	R279	*A2
C6	*A2	CL1	A1	Q203	*B2	R76	*A2	R280	*A2
C7	*A2	CL2	A1	Q211	*A2	R77	*A2	R281	*A2
C8	A2	CL3	A1	Q212	*A2	R78	A1	R300	*A2
C9	A2	CL4	A2	Q214	*A2	R79	*A2	R301	*A2
C10	*A2	CL5	A2	Q215	*A2	R80	*A2	R302	*A2
C11	A2			Q216	*A2	R81	*A1	R303	*A2
C12	A1	CN1	*B1	Q217	*A2	R82	*A1	R304	*A2
C13	A2	CN2	B1	Q218	*A2	R83	A1	R305	*A2
C14	A1	CN3	B1	Q219	A2	R84	A1	R306	*A2
C15	A2	CN4	B1	Q220	A2	R85	*A2	R307	*A2
C16	A1	CN5	A2	Q221	B2	R86	*A2	R308	*A2
C17	A1	CN6	A2	Q222	B2	R87	*A2	R309	*A2
C18	*A2	CN7	B2	Q300	A2	R88	A1	R310	*A2
C19	*A2	CN8	A2	Q301	A2	R89	A1	R311	*A2
C20	A1			Q302	*A2	R90	*A2	R312	*A2
C21	A1	D1	B1			R91	*A1	R313	*A2
C22	A1	D2	B1	R1	A1	R200	*B1	R314	*A2
C23	*A2	D3	B1	R2	A1	R201	*B1	R315	*A2
C24	*A2	D4	*A1	R3	*A1	R202	B2	R316	A2
C25	A2	D5	*A1	R4	*A1	R203	*B2	R317	A2
C26	*A1	D6	A2	R5	*A2	R204	B2	R318	A2
C27	B1	D7	A2	R6	*A2	R205	B2		
C28	A2	D8	A2	R7	*A2	R206	*B2	S1	A2
C29	*A1	D9	A1	R8	*A2	R207	*B2		
C30	*A1	D10	A1	R9	*A2	R208	*B2	THP1	*B1
C31	A1	D11	A1	R10	*A2	R209	B2	THP2	A1
C32	A1	D12	A2	R11	*A2	R210	B2		
C33	A1	D13	A1	R12	*A2	R211	B2	TP1	A2
C34	A1	D14	*A2	R13	*A2	R212	*B2	TP2	A1
C35	B2	D15	*A1	R14	*A1	R213	B2		
C36	*A1	D16	*A2	R15	*A1	R214	B2		
C37	*A2	D200	B2	R16	*A2	R215	*B2		
C38	*A2	D201	B2	R17	*A2	R216	B2		
C39	*A2	D202	B2	R18	*A2	R217	B2		
C40	*A2	D203	B2	R19	*A2	R218	B2		
C41	A1	D300	*A2	R20	*A2	R219	B2		
C42	*A2	D301	A2	R21	*A2	R220	*B1		
C43	*A2	D302	A2	R22	*A2	R221	*B1		
C44	*A2	D303	*A2	R23	*A2	R222	*B1		
C45	*A2			R24	*A2	R223	*B1		
C46	*A2	FB1	*B1	R25	*A2	R224	*B1		
C90	*B1	FB2	*B1	R26	A2	R225	*B2		
C200	*B2	FB3	*B1	R27	A2	R226	B2		
C201	*B2	FB4	*A1	R28	*A2	R227	*B2		
C202	B2	FB5	*A2	R29	*A2	R228	*B2		
C203	*B2	FB6	*A1	R30	*A2	R229	*B2		
C204	*B2	FB8	*A2	R31	*A2	R230	*B1		
C205	B2			R32	A2	R231	*B1		
C206	B2	IC1	A2	R33	*A2	R232	B2		
C207	B2	IC2	A1	R34	*A2	R233	*B2		
C208	B2	IC3	*A2	R35	A1	R234	*B2		
C209	B2	IC4	A1	R36	A1	R235	*B2		
C210	B2	IC5	A2	R37	*A2	R236	*B2		
C211	B2	IC6	*A2	R38	*A2	R237	*B2		
C212	*B1	IC18	*A2	R39	A2	R238	*B2		
C213	B1	IC200	B2	R40	*A2	R239	B2		
C214	B2	IC201	B2	R41	*A2	R240	*B1		
C215	B2	IC202	B1	R42	*A2	R241	*B1		
C217	B2	IC301	A2	R43	A2	R242	B2		
C220	A2	IC304	A2	R44	A2	R243	B2		
C221	A2	IC305	*A2	R45	A2	R244	B2		
C222	A2			R46	A2	R245	B2		
C223	*A2	L1	A1	R47	A1	R246	B2		
C224	*A2	L2	*A2	R48	A1	R247	B2		
C226	A2	L3	*A1	R49	A1	R248	B2		
C227	A2	L4	A1	R50	A1	R249	B2		
C228	*A2	L5	A1	R51	A1	R250	B2		
C229	*A2	L10	*B1	R52	A1	R251	*B1		
C230	*A2	L200	*A2	R53	*A2	R252	*B1		
C231	*A2	L201	*A2	R54	*A2	R253	*B1		
C232	*A2			R55	*A2	R254	*B1		
C233	*A2	Q1	*B1	R56	A2	R255	*B1		
C234	*A2	Q2	A1	R57	*A2	R256	*B1		
C235	*A2	Q3	*A1	R58	A2	R257	*B1		
C236	*A2	Q4	B2	R59	A2	R258	*B1		
C237	*A2	Q5	*B2	R60	A2	R259	*B1		
C238	*A2	Q6	A2	R61	*A1	R260	A2		
C239	*A2	Q7	*B2	R62	*A1	R264	A2		
C300	*A2	Q8	*A2	R63	*A2	R267	A2		
C301	*A2	Q9	*A1	R64	*A2	R268	A2		
C302	*A2	Q10	*A1	R65	*A1	R269	A2		
C303	*A2	Q11	A2	R66	*A1	R270	A2		
C304	A2	Q12	A2	R67	*A1	R271	A2		
C305	A2	Q13	*A1	R68	*A1	R272	A2		
C306	A2	Q14	*A1	R69	*A1	R273	A2		
C307	*A2	Q15	*A2	R70	*A1	R274	*A2		

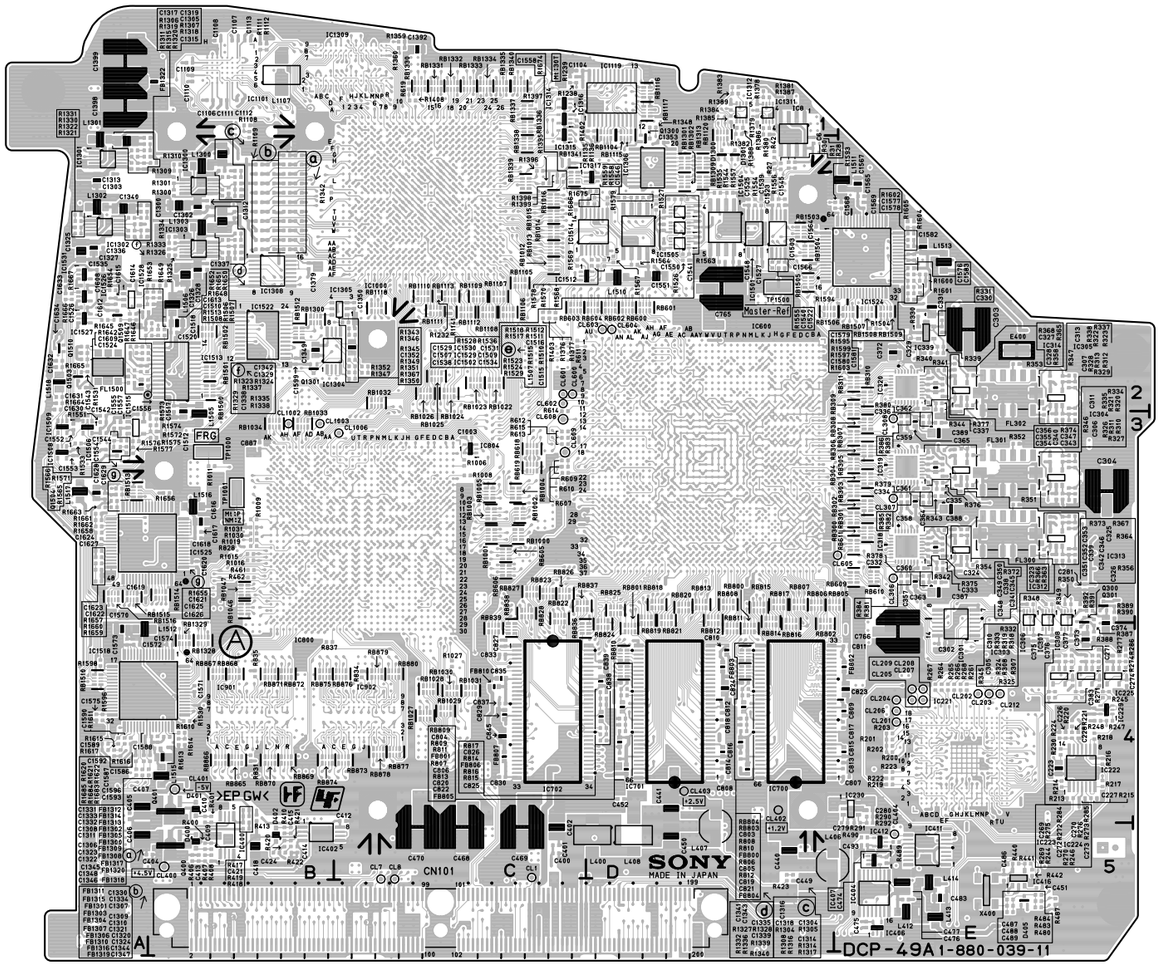

DCP-49A -A SIDE-
SUFFIX: -11

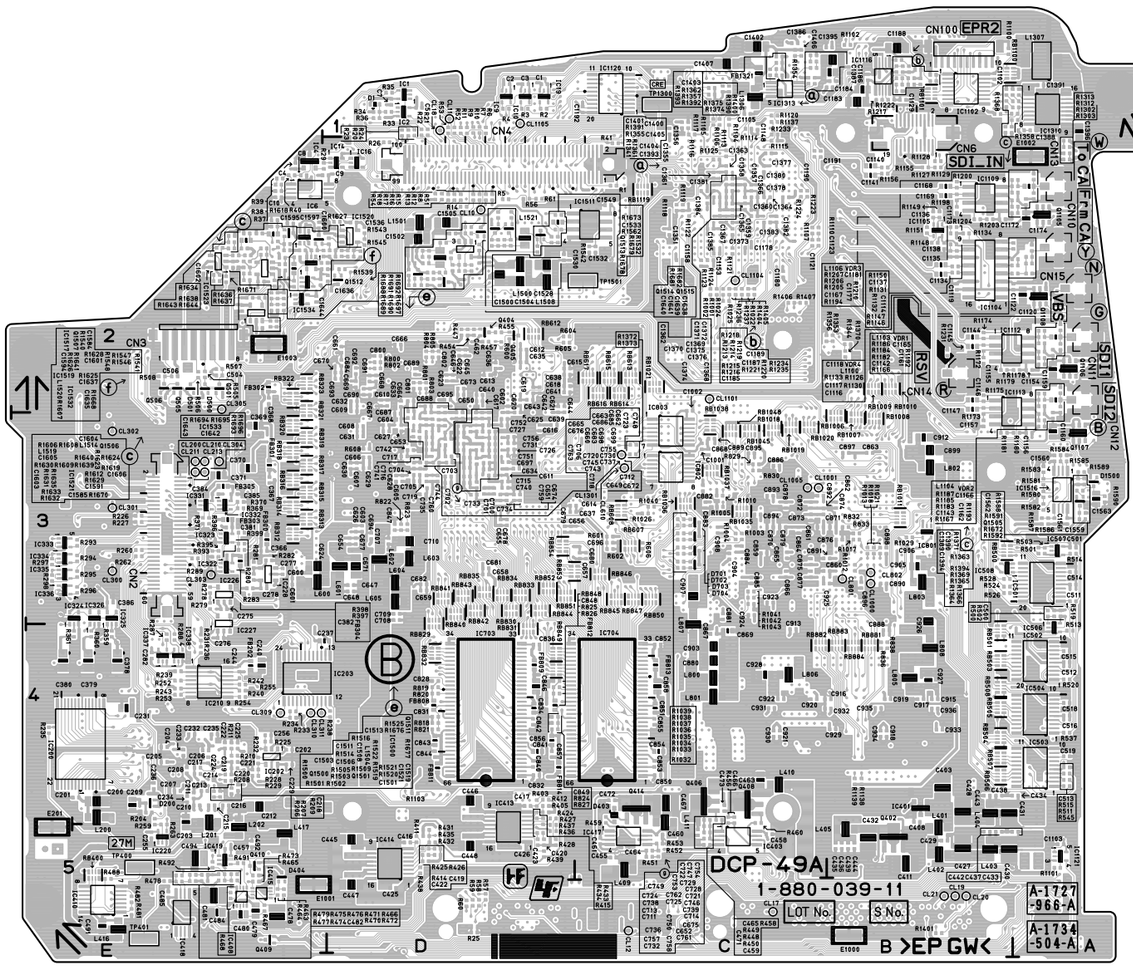

DCP-49A -B SIDE-
SUFFIX: -11

DCP-49A (1-880-039-11)
---

*:B SIDE

C1	*D1	C216	*E4	C270	E4	C327	E2	C354	E2	C380	*E4	C416	*D5	C442	*B5	C471	*C5
C2	*D1	C217	*E4	C271	E4	C328	E2	C355	E2	C381	*E3	C417	*D4	C443	*B4	C472	*C4
C3	*D1	C218	*E4	C272	E4	C329	E2	C356	E2	C382	*E3	C418	B5	C444	*B5	C473	*C4
C4	*E2	C219	*E4	C273	E4	C330	E2	C357	E3	C383	E4	C419	*D5	C445	*D5	C474	E5
C5	*D1	C220	*E4	C274	E4	C331	E2	C358	E3	C384	*E3	C420	*D5	C446	*D4	C475	E5
C6	D2	C221	*E4	C275	*E3	C332	E3	C359	E3	C385	*E3	C421	B4	C447	*D5	C476	E5
C7	*D1	C222	*E4	C276	*E4	C333	E3	C360	E3	C386	*E3	C422	*D5	C448	*D5	C477	E5
C8	*E2	C223	E4	C277	*E3	C334	E3	C361	E3	C387	E3	C423	*D5	C449	D5	C478	*E5
C9	*E2	C224	*E4	C278	*E3	C335	E3	C362	E2	C388	E3	C424	B5	C450	D5	C479	*E5
C10	*E2	C225	*E4	C279	E5	C336	E3	C363	E3	C389	E3	C425	*D5	C451	E5	C480	*E5
C200	*E4	C226	E4	C280	E4	C337	E2	C364	E3	C400	C5	C426	*D5	C452	D4	C481	*E5
C201	*E4	C227	E4	C281	E3	C338	E3	C365	E3	C401	C5	C427	*B5	C455	*C5	C482	*E5
C202	*E4	C228	E4	C282	*E4	C339	E3	C366	*E3	C402	C5	C428	*B4	C457	*E5	C483	E5
C203	*E4	C229	*E4	C302	E4	C340	E2	C367	*E3	C403	*B4	C429	*B5	C458	*C5	C484	*E5
C204	*E4	C231	*E4	C303	E2	C341	E3	C368	*E2	C404	B5	C430	*B5	C459	*C5	C485	*E5
C205	*E4	C232	*E4	C304	E3	C342	E3	C369	*E3	C405	A4	C431	*B4	C460	*C5	C486	E5
C206	*E4	C233	*E4	C305	E3	C343	E2	C370	*E3	C406	A5	C432	*B5	C461	*C5	C487	E5
C207	*E4	C234	*E4	C306	E3	C345	E3	C371	*E3	C407	A4	C433	*A5	C462	*D2	C488	E5
C208	*E4	C235	*E4	C307	E3	C346	E3	C372	E2	C408	*B4	C434	*A4	C463	*C4	C489	E5
C209	*E4	C236	*E4	C310	E3	C347	E2	C373	E4	C409	B5	C435	*B5	C464	*C5	C491	*E5
C210	*E4	C237	*E4	C311	E3	C348	E3	C374	E4	C410	B4	C436	*B5	C465	*C4	C492	*E5
C211	*E4	C240	*E4	C313	E2	C349	E3	C375	E4	C411	*B5	C437	*B5	C466	*C4	C493	E5
C212	*E4	C244	*E4	C323	E3	C350	E3	C376	E4	C412	C4	C438	*B4	C467	*C4	C494	*E5
C213	*E4	C255	*E5	C324	E3	C351	E3	C377	E4	C413	B5	C439	*B5	C468	C5	C500	*A3
C214	*E4	C256	*E4	C325	E3	C352	E3	C378	*E4	C414	B5	C440	D5	C469	C5	C501	*A3
C215	*E4	C269	E4	C326	E3	C353	E3	C379	*E4	C415	B5	C441	D4	C470	C5	C504	*E2

C506	*E2	C617	*D2	C643	*D2	C669	*D2	C695	*D2	C721	*D3	C747	*D3	C807	E4	C833	C4
C511	*A3	C618	*D2	C644	*D2	C670	*D2	C696	*C3	C722	*D3	C748	*D3	C808	D4	C834	*D4
C512	*A4	C619	*D2	C645	*D2	C671	*D3	C697	*D3	C723	*D3	C749	*D3	C809	E4	C835	C4
C513	*A4	C620	*D2	C646	*D2	C672	*D3	C698	*D3	C724	*D3	C750	*D3	C810	D4	C836	*D4
C514	*A3	C621	*D2	C647	*D3	C673	*D2	C699	*D3	C725	*D3	C751	*D3	C811	E4	C837	C4
C515	*A4	C622	*D2	C648	*D3	C674	*D3	C700	*D3	C726	*D3	C752	*D3	C812	D4	C838	D4
C516	*A4	C623	*D2	C649	*D3	C675	*D3	C701	*D3	C727	*D3	C753	*D3	C813	E4	C839	D4
C518	*A4	C624	*E3	C650	*D2	C676	*D3	C702	*D3	C728	*D3	C754	*D3	C814	D4	C840	*D4
C519	*A4	C625	*D3	C651	*D3	C677	*D3	C703	*D3	C729	*D3	C755	*D3	C815	E4	C841	*D4
C600	*E3	C626	*D3	C652	*D3	C678	*D3	C704	*D3	C730	*D3	C756	*D3	C816	D4	C842	*D4
C601	*E3	C627	*D3	C653	*D3	C679	*D3	C705	*D3	C731	*D3	C757	*D3	C817	E4	C843	*D4
C602	*D2	C628	*D3	C654	*D3	C680	*C3	C706	*D3	C732	*D3	C758	*D3	C818	D4	C844	*D4
C603	*D3	C629	*D3	C655	*D3	C681	*D3	C707	*D3	C733	*D3	C759	*D3	C819	D4	C845	C4
C604	*D3	C630	*D3	C656	*D3	C682	*D3	C708	*D3	C734	*D3	C760	*D3	C820	D4	C846	*D4
C605	*D3	C631	*D3	C657	*C3	C683	*D3	C709	*D3	C735	*D3	C761	*D3	C821	D4	C847	*D3
C606	*D3	C632	*D2	C658	*D3	C684	*D2	C710	*D3	C736	*D3	C762	*D3	C822	D4	C848	*D4
C607	*D3	C633	*D2	C659	*D3	C685	*D2	C711	*D3	C737	*D3	C763	*D3	C823	E4	C849	*D4
C608	*D3	C634	*D3	C660	*D3	C686	*D3	C712	*D3	C738	*D3	C765	D2	C824	D4	C850	*C4
C609	*D2	C635	*D2	C661	*D2	C687	*D3	C713	*D3	C739	*D3	C766	E4	C825	D4	C851	*C4
C610	*D2	C636	*D2	C662	*D2	C688	*D2	C714	*D3	C740	*D3	C800	*D2	C826	D4	C852	*C4
C611	*D3	C637	*D3	C663	*D2	C689	*D2	C715	*D3	C741	*D3	C801	*D2	C827	C4	C853	*C4
C612	*D2	C638	*D2	C664	*D2	C690	*D2	C716	*D3	C742	*D3	C802	*D2	C828	*D4	C854	*C4
C613	*D2	C639	*D3	C665	*D2	C691	*D2	C717	*D3	C743	*D3	C803	D4	C829	C4	C855	*C4
C614	*D3	C640	*D2	C666	*D2	C692	*D2	C718	*D3	C744	*D3	C804	D4	C830	C4	C856	*D4
C615	*D2	C641	*D2	C667	*D2	C693	*D2	C719	*D3	C745	*D3	C805	D4	C831	*D4	C857	*D4
C616	*D3	C642	*D2	C668	*D2	C694	*D3	C720	*D3	C746	*D3	C806	D4	C832	*D4	C858	*C4

 DCP-49A

C859	*C3
C860	*B3
C861	*C3
C862	*C3
C863	*B3
C864	*C3
C865	*C3
C866	*C3
C867	*C4
C868	*C3
C869	*C4
C870	*C3
C871	*B3
C872	*C3
C873	*C3
C874	*B3
C875	*C3
C876	*B3
C877	*C3
C878	*C3
C879	*C3
C880	*C4
C881	*C3
C882	*C3
C883	*C3
C884	*C3
C885	*C3
C886	*C3
C887	B3
C888	*B4
C889	*C3
C890	*B3
C891	*B3
C892	*C3
C893	*C3
C894	*C3
C895	*C3
C896	*B3
C897	*B3
C898	*B3
C899	*B3
C903	*C4
C904	*C3
C905	*B3
C906	*B3
C907	*C3
C908	*C3
C912	*B3
C913	*C4
C915	*B4
C916	*B4
C917	*B4
C918	*B4
C919	*B4
C920	*C4
C921	*C4
C922	*C4
C923	*C3
C924	*C3
C925	*B3
C926	*B3
C927	*B4
C928	*C4
C929	*B4
C930	*C4
C931	*C4
C932	*B4
C933	*B4
C934	*B4
C935	*B4
C936	*B4
C1001	*C3
C1002	*C2
C1003	C3
C1102	*B1
C1103	*A5
C1104	C1
C1105	*C1
C1106	B1
C1107	B1
C1108	B1
C1109	B1
C1110	B1
C1111	B1
C1112	B1
C1113	B1
C1114	*B2
C1116	*A2
C1117	*A2
C1118	*A2
C1119	*B2
C1120	*A2
C1121	*C2
C1122	*A2
C1123	*C2
C1129	*B1
C1134	*B2
C1135	*B2
C1136	*B2
C1137	*B2
C1138	*B2
C1140	*B2
C1141	*B2
C1142	*A2
C1143	*A3
C1144	*B2
C1145	*B2
C1146	*B2
C1147	*B2
C1148	*C1
C1153	*C2
C1154	*A2
C1155	*B2
C1156	*A3
C1157	*B3
C1158	*C2
C1159	*A2
C1160	*A3
C1161	*A2
C1162	*A3
C1165	*A2
C1166	*A2
C1167	*A2
C1168	*B2
C1169	*B2
C1172	*B2
C1173	*B2
C1174	*A2
C1177	*A2
C1178	*C2
C1180	*C2
C1181	*A2
C1183	*B1
C1184	*B1
C1185	*B1
C1186	*B1
C1187	*B1
C1188	*B1
C1189	*B1
C1190	*C2
C1191	*C2
C1192	*C1
C1300	B2
C1302	B2
C1303	A2
C1304	B2
C1305	A2
C1306	B2
C1307	B2
C1308	B2
C1309	B2
C1310	B2
C1311	B2
C1312	B2
C1313	A2
C1314	B2
C1315	B2
C1316	B2
C1317	A2
C1318	B2
C1319	A2
C1320	B2
C1321	B2
C1322	B2
C1323	B2
C1324	B2
C1325	A2
C1326	B2
C1327	A2
C1328	B2
C1329	A2
C1330	B2
C1331	B2
C1332	B2
C1333	B2
C1334	B2
C1335	B2
C1336	A2
C1337	B2
C1338	A2
C1339	B2
C1340	A2
C1341	B2
C1342	A2
C1343	B2
C1344	B2
C1345	B2
C1346	B2
C1347	B2
C1348	B2
C1349	B2
C1350	C2
C1351	*C2
C1352	C2
C1353	D2
C1355	*C1
C1356	*C1
C1357	*C2
C1358	*C2
C1359	*C2
C1360	*C2
C1361	*C2
C1362	*C2
C1363	*C2
C1364	*C2
C1365	*C2
C1366	*C2
C1367	*C2
C1368	*C2
C1369	*C2
C1370	*C2
C1371	*C2
C1372	*C2
C1373	*C2
C1374	*C2
C1375	*C2
C1376	*C2
C1377	*C2
C1378	*C2
C1379	B2
C1380	*C2
C1381	*C2
C1382	*C2
C1383	*C2
C1384	*C2
C1385	*C2
C1386	*C1
C1387	*B1
C1388	*A1
C1389	*B1
C1390	*A1
C1391	*A1
C1392	C1
C1393	*B1
C1394	*B1
C1395	*B1
C1396	*A1
C1398	A1
C1399	A1
C1400	*B1
C1401	*C1
C1402	*C1
C1403	*C1
C1404	*B1
C1405	*B1
C1406	*C1
C1407	*C1
C1500	*D2
C1501	*D2
C1502	*D2
C1503	*D2
C1504	*D2
C1505	*D2
C1506	*D2
C1507	D2
C1508	*D2
C1509	D2
C1510	B2
C1511	*D2
C1512	B3
C1513	*D2
C1515	B2
C1516	A2
C1517	B2
C1518	B2
C1519	*D2
C1520	B2
C1521	*D2
C1522	D2
C1523	D2
C1524	A2
C1525	D2
C1526	A2
C1527	D2
C1528	*D2
C1529	D2
C1530	*D2
C1531	D2
C1532	*C2
C1533	*D2
C1534	D2
C1535	A2
C1536	*D2
C1538	D2
C1539	D2
C1540	D2
C1541	D2
C1542	A3
C1543	A2
C1544	A3
C1545	D2
C1546	D2
C1548	D2
C1549	*C2
C1550	D2
C1551	D2
C1552	A3
C1553	A3
C1554	A3
C1555	A3
C1556	A3
C1557	A3
C1558	C2
C1559	*A3
C1560	*A3
C1561	*A3
C1562	*A3
C1563	*A3
C1564	D2
C1565	E2
C1566	D2
C1567	E2
C1568	E2
C1569	E2
C1570	A4
C1571	B4
C1572	A4
C1573	A4
C1574	B4
C1575	A4
C1576	E2
C1577	E2
C1578	E2
C1579	E2
C1580	E2
C1581	E2
C1582	E2
C1583	E2
C1584	*D2
C1585	*E2
C1586	B4
C1587	B4
C1588	A4
C1589	A4
C1590	A4
C1591	*E2
C1592	B4
C1593	B4
C1594	*E2
C1595	*E2
C1596	B4
C1597	*E2
C1599	B2
C1600	*E2
C1601	*D2
C1602	*E2
C1603	*E2
C1604	*E2
C1605	*E2
C1606	*E2
C1608	A2
C1609	A2
C1612	A2
C1613	A2
C1614	A2
C1615	A2
C1616	B3
C1617	B3
C1618	B3
C1619	A3
C1620	B3
C1621	A3
C1622	A3
C1623	A3
C1624	A3
C1625	A3
C1626	A3
C1627	A3
C1628	A3
C1629	A3
C1630	A2
C1631	A2
C1632	A2
C1633	A2
C1634	A2
C1635	*E2
C1636	*D2
C1637	*E2
C1638	*D2
C1639	*D2
C1640	*D2
C1641	*D2
C1642	*E2
C1643	*E2
C1644	*E2
CL1	C5
CL7	C5
CL8	C5
CL10	*D2
CL11	*D1
CL12	*C5
CL17	*C5
CL18	*D1
CL19	*B5
CL20	*B5
CL21	*B5
CL200	*E3
CL201	E4
CL202	E4
CL203	E4
CL204	E4
CL205	E4
CL206	E4
CL207	E4
CL208	E4
CL209	E4
CL210	*E3
CL211	*E3
CL212	E4
CL213	*E3
CL300	*E3
CL301	*E3
CL302	*E3
CL303	*E3
CL304	*E3
CL305	*E2
CL306	E3
CL307	E3
CL308	E3
CL309	*E4
CL310	*E4
CL311	*E4
CL400	B5
CL401	B4
CL402	D4
CL403	D4
CL404	E5
CL600	C2
CL601	C2
CL602	C2
CL603	D2
CL604	D2
CL605	E3
CL608	C3
CL609	C3
CL610	*C3
CL801	*B3
CL802	*B3
CL1000	*B3
CL1001	*C3
CL1002	B3
CL1003	B3
CL1005	*C3
CL1006	C3
CL1101	*C2
CL1104	*C2
CL1105	*D1
CL1301	*C3
CN2	*E3
CN3	*E2
CN4	*D2
CN6	*B1
CN10	*A2
CN11	*A2
CN12	*A2
CN13	*A2
CN14	*B2
CN15	*A2
CN100	*B1
CN101	C5
D1	*D1
D200	*E4
D400	B5
D401	B4
D402	B5
D403	*C4
D404	*E5
D405	E5
D500	*E2
D501	*E2
D701	*C3
D702	*C3
D703	*C3
D704	*C3
D1300	D2
D1301	D2
D1500	*A3
E201	*E5
E400	E2
E1000	*B5
E1001	*E5
E1002	*A2
E1003	*E2
FB202	*E4
FB300	*E3
FB301	*E3
FB302	*E2
FB303	*E3
FB304	*E3
FB305	*E3
FB800	D4
FB801	D4
FB802	E4
FB803	D4
FB804	D4
FB805	D4
FB806	D4
FB807	C4
FB808	*D4
FB809	*D4
FB810	C4
FB811	*D4
FB812	*D4
FB813	*C4
FB814	*D4
FB1300	B2
FB1301	B2
FB1302	B2
FB1303	B2
FB1304	B2
FB1305	B2
FB1306	B2
FB1307	B2
FB1308	B2
FB1309	B2
FB1310	B2
FB1311	B2
FB1312	B2
FB1313	B2
FB1314	B2
FB1315	B2
FB1316	B2
FB1317	B2
FB1318	B2
FB1319	B2
FB1320	B2
FB1321	*C1
FB1322	B1
FL300	E3
FL301	E3
FL302	E2
FL1500	A2
IC1	*D1
IC2	*D1
IC4	*E2
IC6	*E2
IC8	D1
IC9	*D1
IC10	*D1
IC14	*D2
IC16	*D2
IC19	*D1
IC200	*E4
IC202	*E4
IC203	*E4
IC210	*E4
IC220	*E5
IC221	E4
IC222	E4
IC223	E4
IC224	E4
IC225	E4
IC226	*E3
IC227	*E3
IC228	*E3
IC229	E4
IC230	E4
IC301	E4
IC303	E3
IC304	E3
IC305	E2
IC306	E3
IC307	E3
IC308	E3
IC312	E3
IC313	E3
IC314	E2
IC318	E3
IC319	E3
IC320	E2
IC322	*E3
IC323	*E3
IC324	*E3
IC325	*E3
IC326	*E3
IC331	*E3
IC332	*E3
IC333	*E3
IC334	*E3
IC335	*E3
IC336	*E3
IC337	*E4
IC338	*E4
IC339	E2
IC400	B5
IC401	*B4
IC402	B5
IC403	*C5
IC404	E5
IC406	E5
IC407	E5
IC408	*E5
IC410	*E5
IC411	E5
IC412	E5
IC413	*D5
IC414	*D5
IC415	*E5
IC416	E5
IC417	*C5
IC418	*E5
IC419	*E5
IC501	*A3
IC502	*A4
IC503	*A4
IC504	*A4
IC506	*A4
IC507	*A3
IC508	*B3
IC600	D3
IC700	D4
IC701	D4
IC702	C4
IC703	*D4
IC704	*C4
IC800	C3
IC801	*B3
IC802	*C3
IC803	*C3
IC804	C3
IC901	B4
IC902	C4
IC1000	C2
IC1101	B1
IC1102	*B1
IC1104	*B2
IC1105	*B2
IC1109	*B2
IC1112	*B2
IC1113	*B3
IC1116	*B1
IC1119	D1
IC1120	*C1
IC1121	*A5
IC1300	B2
IC1301	A2
IC1302	A2
IC1303	B2
IC1304	B2
IC1305	C2
IC1306	D2
IC1308	B2
IC1309	C1
IC1310	*A1
IC1311	D1
IC1312	D1
IC1313	*C1
IC1314	C1
IC1315	C1
IC1316	C1
IC1317	D2
IC1500	*D2
IC1501	D2
IC1502	D2
IC1503	D2
IC1504	D2
IC1505	D2
IC1506	A3
IC1508	A3
IC1509	A3
IC1511	*C2
IC1512	D2
IC1513	B2
IC1514	D2
IC1515	A3
IC1516	*A3
IC1517	*E2
IC1518	B4
IC1519	*E2
IC1520	*D2
IC1521	*E2
IC1522	B2
IC1523	*E2
IC1524	E2
IC1525	A3
IC1526	A2
IC1527	A2
IC1528	A2
IC1529	D2
IC1530	D2
IC1531	A2
IC1532	*E2
IC1533	*E2
IC1534	*E2
L200	*E4
L201	*E4
L202	*E5
L400	D5
L401	*B5
L402	*B5
L403	*B5
L404	*B4
L405	*B5
L406	D5
L407	D5
L408	D5
L409	*C5
L410	*C4
L411	*C4
L412	E5
L413	E5
L414	E5
L416	*E5
L417	*E5
L600	*E3
L601	*D3
L602	*D3
L603	*D3
L604	*D3
L605	*D3
L800	*C4
L801	*C4
L802	*B3
L803	*B3
L805	*B4
L806	*C4
L807	*C4
L808	*B4
L1100	*A2
L1103	*A2
L1104	*A2
L1106	*A2
L1107	B1
L1300	B2
L1301	A2
L1302	A2
L1303	B2
L1306	*C1
L1307	*A1
L1500	*D2
L1501	*D2
L1504	*D2
L1505	B3
L1506	B2
L1507	A2
L1508	*D2
L1510	D2
L1511	E2
L1512	A4
L1513	E2
L1514	*E2
L1515	B4
L1516	B3
L1517	A3
L1518	A2
L1519	*E2
L1520	*E2
L1521	*D2
Q300	E3
Q301	E3
Q400	B5
Q401	B4
Q402	*B5
Q404	*D2
Q405	*D2
Q406	*C4
Q408	*C4
Q409	*E5
Q410	*E5
Q414	*C4
Q501	*E2
Q505	*E2
Q506	*E2
Q1105	*A2
Q1106	*A2
Q1107	*A3
Q1108	*A2
Q1300	D2
Q1301	B2
Q1500	*D2
Q1501	*D2
Q1503	A2
Q1504	A3
Q1505	*A3
Q1506	*E2
Q1507	*E2
Q1509	A2
Q1510	A2
Q1511	*D2
Q1512	*D2
Q1513	*D2
Q1514	*D2
Q1515	*D2
R1	*C2
R2	*D1
R3	*D1
R4	*D1
R5	*D2
R6	*D1
R7	*D1
R8	*D2
R9	*D1
R10	*D1
R11	*D1
R12	*D2
R13	*D2
R14	*D2
R15	*D2
R16	*D2
R17	*D2
R18	*D2
R20	*D1
R21	*D1
R22	*D1
R23	*D1
R24	*D1
R25	*D5
R26	*D2
R27	D2
R28	D2
R29	*E2
R30	D2
R31	D2
R33	*D1
R34	*D1
R35	*D1
R36	*D1
R37	*E2
R38	*E2
R39	*E2
R40	*E2
R41	*C2
R42	D2
R51	*D2
R52	*D1
R53	*D1
R54	*D2
R56	*D2
R57	*D5
R58	*D5
R59	*D5
R60	*D5
R61	*D2
R200	E4
R201	E4
R202	E4
R203	E4
R204	*E4
R206	*E4
R207	*E4
R208	*E4
R209	*E4
R210	*E4
R211	*E4
R213	E4
R214	E4
R215	E4
R216	E4
R217	E4
R218	E4
R219	E4
R220	E4
R221	E4
R222	E4
R223	E4
R224	E4
R225	*E4
R226	*E3
R227	*E3
R228	*E4
R229	*E4
R230	E4
R231	*E4
R232	*E4
R233	*E4
R234	*E4
R235	*E4
R236	*E4
R238	*D4
R239	*E4
R240	*E4
R242	*E4
R243	*E4
R244	E4
R245	E4
R246	E4
R247	E4
R248	E4
R252	*E4
R253	*E4
R254	*E4
R255	*E4
R259	*E4
R260	*E3
R261	E4
R262	*E3
R263	*E5
R264	E4
R265	E4
R266	E4
R267	E4
R268	E4
R269	E4
R270	E4
R271	E4
R272	E4
R273	E4
R274	E4
R275	E4
R276	E4
R277	E4
R278	*E3
R279	*E3
R280	*E3
R281	*E3
R282	*E3
R283	*E3
R284	E4
R285	E4
R286	E4
R287	*E4
R288	*E4
R289	*E3
R290	E4
R291	E5
R292	E5
R293	*E3
R294	*E3
R295	*E3
R296	*E3
R297	*E3
R298	*E3
R307	E3
R308	E3
R310	E3
R311	E3
R312	E3
R313	E3
R318	E3
R319	E3
R320	E3
R321	E3
R322	E2
R323	E2
R324	E3
R325	E3
R326	E3
R327	E3
R328	E3
R329	E3
R330	E2
R331	E2
R332	E3
R333	E3
R334	E3
R335	E3
R337	E2
R338	E2
R339	E2
R340	E2
R341	E2
R342	E3
R343	E3
R344	E3
R345	E3
R346	E3
R347	E3
R348	E3
R349	E3
R350	E3
R351	E3
R352	E3
R353	E2
R354	E3
R356	E3
R358	E2
R359	*E4
R360	*E4
R361	*E4
R363	E3
R364	E3
R365	E2
R366	E3
R367	E3
R368	E2
R369	*E3
R370	*E3
R371	*E3
R372	E3
R373	E3
R374	E2
R375	E3
R376	E3
R377	E2
R378	E3
R379	E3
R380	E3
R381	E3
R382	E3
R383	E3
R384	E3
R385	E3
R386	E3
R387	E3
R388	E4
R389	E3
R390	E3
R391	E3
R392	E3
R393	*E3
R395	*E3
R396	*E3
R397	*E3
R398	*E3
R399	*E3
R400	B5
R401	B4
R403	*D4
R405	*D4
R406	B5
R407	B5
R408	B5
R410	B5
R411	*D5
R412	*D4
R413	B4
R414	*D5
R415	*D5
R417	B4
R418	B5
R419	B4
R420	B5
R421	B5
R422	B5
R423	D5
R424	*D4
R425	*D5
R426	*D5
R427	*D4
R428	*D5
R431	*D5
R432	*D5
R433	*D4
R434	*D4
R435	*D5
R436	*D5
R437	*D5
R438	*D5
R439	*D5
R440	E5
R441	E5
R442	E5
R447	*D2
R448	*C5
R449	*C5
R450	*C5
R451	*C5
R452	*C5
R453	*C5
R454	*D2
R455	*D2
R456	*C4
R457	*D2
R458	*C4
R459	*C4
R460	*C4
R461	B3
R462	B3
R463	*E5
R464	*E5
R465	*E5
R466	*E5
R467	*E5
R468	*E5
R470	*E5
R471	*E5
R472	*E5
R473	*E5
R474	*E5
R475	*E5
R476	*E5
R477	*E5
R478	*E5
R479	*E5
R480	E5
R481	*E5
R482	*E5
R483	E5
R484	E5
R487	E5
R488	*E5
R489	E5
R490	E5
R491	*E5
R492	*E5
R500	*A3
R501	*A3
R502	*A3
R503	*A3
R505	*E2
R506	*E2
R507	*E2
R508	*E2
R511	*A4
R513	*A4
R514	*A3
R515	*A4
R519	*A3
R520	*A4
R524	*B3
R526	*B3
R528	*B3
R537	*A4
R545	*A4
R600	*D2
R601	*C3
R602	*C3
R604	*D2
R605	*D2
R606	*C3
R607	C3
R608	*D3
R609	C3
R610	C3
R611	C2
R612	C3
R613	C3
R614	C3
R615	C3
R619	C1
R800	*D2
R801	*D2
R802	*D2
R803	*D2
R804	*D2
R805	*D2
R806	D4
R807	D4
R808	D4
R809	D4
R810	D4
R811	D4
R812	D4
R813	D4
R814	D4
R815	D4
R816	D4
R817	D4
R818	*D4
R819	*D4
R820	*D4
R821	*D4
R822	*D3
R823	*D3
R824	*D4
R825	*D4
R826	*D4
R827	*D4
R828	B3
R829	*C3
R830	*C3
R831	B4
R832	*B3
R833	*B3
R834	C4
R835	B4
R836	*B4
R837	B4
R838	*B4
R1001	*C2
R1002	*C2
R1003	*C3
R1004	*C3
R1005	*C3
R1006	C3
R1008	C3
R1009	B3
R1010	*C3
R1011	B3
R1012	*B3
R1013	*B3
R1015	B3
R1016	B3
R1017	*B3
R1018	*B3
R1019	B3
R1021	*B3
R1022	*C2
R1024	*C2
R1025	*C2
R1026	*C3
R1027	C4
R1029	*B3
R1030	B3
R1031	B3
R1032	*C3
R1033	*C3
R1034	*C3
R1035	*C3
R1036	*C3
R1037	*C3
R1038	*C3
R1039	*C3
R1040	*C3
R1041	*C3
R1042	*C3
R1043	*C3
R1100	*B1
R1101	*A5
R1102	*B1
R1103	*D4
R1104	*C1
R1105	*C1
R1106	*C1
R1107	*C2
R1108	B1
R1109	B1
R1110	*C2
R1111	B1
R1112	B1
R1113	*C2
R1114	*C1
R1115	*C2
R1116	*C1
R1117	*C1
R1118	*C2
R1119	*C2
R1120	*C1
R1121	*C2
R1122	*C2
R1123	*C2
R1124	*C2
R1125	*C2
R1126	*A2
R1127	*B2
R1128	*B2
R1129	*B2
R1130	*A2
R1131	*B2
R1132	*B2
R1133	*A2
R1134	*B2
R1135	D1
R1136	D1
R1137	*C1
R1138	*B4
R1139	*B4
R1141	C2
R1146	*B2
R1147	*B2
R1148	*B2
R1149	*B2
R1150	*B2
R1151	*B2
R1155	*B2
R1156	*B2
R1166	*A2
R1167	*A3
R1172	*B2
R1173	*B2
R1174	*B2
R1175	*B2
R1178	*A2
R1179	*B2
R1180	*A3
R1181	*B3
R1182	*A2
R1183	*A3
R1184	*A2
R1185	*A2
R1186	*A2
R1187	*A2
R1192	*A2
R1193	*A2
R1194	*A2
R1198	*B2
R1200	*B2
R1203	*B2
R1204	*B2
R1205	*A2
R1206	*A2
R1207	*A2
R1210	*A2
R1213	*B1
R1214	*B1
R1215	*B1
R1216	*B1
R1217	*B1
R1218	*B1
R1219	*B1
R1220	*B1
R1221	*B1
R1222	*B1
R1223	*C2
R1224	*C2
R1231	*B2
R1232	C2
R1233	*C1
R1234	*B1
R1235	*B1
R1236	*C2
R1237	*C2
R1238	C1
R1239	C1
R1300	B2
R1301	B2
R1302	*A2
R1303	*A2
R1304	B2
R1305	B2
R1306	A2
R1307	A2
R1308	B2
R1309	B2
R1310	B2
R1311	A2
R1312	*A2
R1313	*A2
R1314	B2
R1315	A2
R1316	B2
R1317	B2
R1318	A2
R1319	A2
R1320	A2
R1321	A2
R1322	A2
R1323	A2
R1324	A2
R1325	B2
R1326	B2
R1327	B2
R1328	B2
R1329	A2
R1330	A2
R1331	A2
R1332	B2
R1333	B2
R1334	B2
R1335	A2
R1336	B2
R1337	A2
R1338	A2
R1339	B2
R1340	B2
R1341	*C1
R1342	B2
R1343	C2
R1344	*B2
R1345	C2
R1346	C2
R1347	C2
R1348	D1
R1349	C2
R1350	C2
R1351	C2
R1352	C2
R1353	*B2
R1354	*C1
R1355	*C1
R1356	*C2
R1357	*C1
R1358	*A1
R1359	C1
R1360	C1
R1361	*C1
R1362	*C1
R1363	*A1
R1364	*B1
R1365	*A1
R1366	*B1
R1367	C2
R1368	*B1
R1369	*A1
R1370	*B2
R1371	*A1
R1372	*C3
R1373	*C3
R1374	*C1
R1375	*C1
R1376	C2
R1377	C2
R1378	D1
R1379	D1
R1380	D1
R1381	D1
R1382	D1
R1383	D1
R1384	D1
R1385	D1
R1386	D1
R1387	D1
R1388	D1
R1389	D1
R1390	*C1
R1391	*C1
R1392	*C1
R1393	*C1
R1394	*A1
R1395	C2
R1396	C2
R1397	C1
R1398	C2
R1399	C2
R1400	*C1
R1401	*B5
R1402	C1
R1403	C2
R1404	*C2
R1405	*C2
R1406	*C2
R1407	*C2
R1408	C1
R1500	*D2
R1501	*D2
R1502	*D2
R1503	*D2
R1504	E2
R1505	*D2
R1506	B2
R1507	B2
R1508	B2
R1509	*D2
R1510	A2
R1511	A2
R1512	A2
R1513	B2
R1514	*D2
R1515	A2
R1516	*D2
R1517	A2
R1518	A2
R1519	*D2
R1520	*D2
R1521	*D2
R1522	*D2
R1523	A2
R1524	A2
R1525	*D2
R1526	D2
R1527	D2
R1528	D2
R1529	A2
R1530	B4
R1531	A2
R1532	*D2
R1533	A3
R1535	D2
R1536	D2
R1539	*D2
R1540	*D2
R1541	*D2
R1542	*C2
R1543	*D2
R1544	D2
R1545	*D2
R1546	*D2
R1547	*D2
R1548	*D2
R1551	A3
R1554	D2
R1555	D2
R1556	D2
R1557	D2
R1558	D2
R1559	D2
R1562	*D2
R1563	D2
R1564	D2
R1565	A3
R1566	A3
R1567	D2
R1568	D2
R1569	C2
R1570	D2
R1571	A3
R1572	B3
R1573	B3
R1574	B3
R1575	B3
R1576	A3
R1577	A3
R1578	D2
R1579	D2
R1580	*A3
R1581	*A3
R1582	*A3
R1583	*A3
R1584	*A3
R1585	*A3
R1586	*A3
R1587	*A3
R1588	*A3
R1589	*A3
R1590	*A3
R1591	*A3
R1592	*A3
R1593	E2
R1594	D2
R1595	E2
R1596	A4
R1597	E2
R1598	A4
R1599	E2
R1600	E2
R1601	E2
R1602	E2
R1603	E2
R1604	E2
R1605	E2
R1606	*E2
R1607	*E2
R1608	*E2
R1609	*E2
R1610	B4
R1611	A4
R1612	*E2
R1613	B4
R1614	B4
R1615	A4
R1616	A4
R1617	A4
R1618	*E2
R1619	*E2
R1620	A4
R1621	A4
R1622	B4
R1623	*E2
R1624	*E2
R1625	*E2
R1626	*E2
R1627	*D2
R1628	*D2
R1629	*E2
R1630	*E2
R1631	*E2
R1632	*E2
R1633	*E2
R1634	*E2
R1635	*E2
R1636	*E2
R1637	*E2
R1638	*E2
R1639	*E2
R1640	*E2
R1641	*E2
R1642	A2
R1643	*E2
R1644	*E2
R1645	A2
R1646	A2
R1647	A2
R1648	B2
R1649	B2
R1650	B2
R1651	B2
R1652	A2
R1653	B2
R1654	A2
R1655	A3
R1656	B3
R1657	A3
R1658	A3
R1659	A3
R1660	A3
R1661	A3
R1662	A3
R1663	A3
R1664	A2
R1665	A2
R1666	A2
R1667	A2
R1668	*D2
R1670	*E2
R1671	*E2
R1672	*A3
R1673	*D2
R1674	D2
R1675	D2
R1676	*D2
R1677	*D2
R1678	*D2
R1679	*D2
R1681	*D2
R1682	*D2
R1683	B4
R1684	A4
R1685	A4
R1686	C2
R1688	*E2
R1689	*E2
R1690	*E2
R1691	*E2
R1692	*E2
R1693	*E2
R1694	*E2
R1695	*E2
R1696	*E2
R1697	*E2
RB300	E3
RB301	E3
RB302	E3
RB303	E3
RB304	E3
RB305	E3
RB306	E3
RB307	E3
RB308	E3
RB309	E2
RB310	E2
RB311	E2
RB312	*E3
RB313	*E3
RB314	*E3
RB315	*E3
RB316	*E3
RB317	*E3
RB318	*E3
RB319	*E3
RB320	*E3
RB321	*E2
RB322	*E2
RB323	*E2
RB400	*E5
RB500	*B3
RB501	*B4
RB503	*B4
RB504	*B4
RB505	*B4
RB506	*B4
RB507	*B4
RB508	*B4
RB600	D2
RB601	D2
RB602	D2
RB603	C2
RB604	D2
RB605	C3
RB606	C3
RB607	*C3
RB608	*C3
RB609	E3
RB610	E3
RB611	E3
RB612	*D2
RB613	*C2
RB614	*C2
RB615	*C2
RB616	*C2
RB617	*C2
RB618	C3
RB619	C3
RB800	D4
RB801	D4
RB802	D4
RB803	D4
RB804	D4
RB805	E3
RB806	D3
RB807	D3
RB808	D3
RB809	D4
RB810	D4
RB811	D4
RB812	D3
RB813	D3
RB814	D3
RB815	D3
RB816	D4
RB817	D3
RB818	D3
RB819	D3
RB820	D3
RB821	D3
RB822	C3
RB823	C3
RB824	D4
RB825	D3
RB826	C3
RB827	C3
RB828	C3
RB829	*D3
RB830	*D3
RB831	*D4
RB832	*D4
RB833	*D3
RB834	*D3
RB835	*D3
RB836	C4
RB837	C3
RB838	C4
RB839	C4
RB840	*D3
RB841	*D3
RB842	*D3
RB843	*D3
RB844	*D3
RB845	*C3
RB846	*C3
RB847	*C3
RB848	*D4
RB849	*D4
RB850	*C3
RB851	*D3
RB852	*D3
RB853	*D3
RB854	*D3
RB865	B4
RB866	B4
RB867	B4
RB868	B4
RB869	B4
RB870	B4
RB871	B4
RB872	B4
RB873	C4
RB874	B4
RB875	B4
RB876	C4
RB877	C4
RB878	C4
RB879	C4
RB880	C4
RB881	*B4
RB882	*C4
RB883	*B4
RB884	*B4
RB1000	C3
RB1001	C3
RB1002	C3
RB1003	C3
RB1004	C3
RB1005	C3
RB1006	*B3
RB1007	*B3
RB1008	*B3
RB1009	*B2
RB1010	*B2
RB1011	*B3
RB1012	C2
RB1013	C2
RB1014	C2
RB1015	C2
RB1016	C2
RB1018	*C3
RB1019	*C3
RB1020	*C3
RB1021	*C2
RB1022	C2
RB1023	C2
RB1024	C2
RB1025	C2
RB1026	C2
RB1027	C4
RB1028	C4
RB1029	C4
RB1030	C4
RB1031	C4
RB1032	C2
RB1033	B3
RB1034	B3
RB1035	*C3
RB1036	*C3
RB1037	*C3
RB1038	*C3
RB1045	*C3
RB1046	B3
RB1047	B3
RB1048	*C3
RB1100	*B1
RB1101	*B1
RB1104	D1
RB1105	C2
RB1106	C2
RB1107	C2
RB1108	C2
RB1109	C2
RB1110	C2
RB1111	C2
RB1112	C2
RB1113	C2
RB1115	D1
RB1116	D1
RB1117	D1
RB1118	C2
RB1119	*C2
RB1120	D1
RB1300	B2
RB1301	D2
RB1302	D2
RB1309	D2
RB1313	D2
RB1328	B4
RB1329	B4
RB1330	C1
RB1331	C1
RB1332	C1
RB1333	C1
RB1334	C1
RB1335	C1
RB1336	C1
RB1337	C1
RB1338	C2
RB1339	C2
RB1340	C1
RB1341	C2
RB1500	B2
RB1501	B2
RB1502	B2
RB1503	D2
RB1504	D2
RB1505	D2
RB1506	D2
RB1507	E2
RB1508	E2
RB1509	E2
RB1510	A4
RB1512	B2
RB1513	A3
RB1514	B3
RB1515	A3
RB1516	A3
TP400	*E5
TP401	*E5
TP1000	B3
TP1001	B3
TP1300	*C1
TP1500	D2
TP1501	*C2
VDR1	*A2
VDR2	*A2
VDR3	*A2
VDR4	*A2
X400	E5

 4-6



DET-45 -A SIDE-
SUFFIX: -11



DET-45 -B SIDE-
SUFFIX: -11




DET-47 -A SIDE-
SUFFIX: -11




DET-47 -B SIDE-
SUFFIX: -11

```
---------------------
DET-47 (1-876-840-11)
---------------------
*:B SIDE

C1       A1    Q1       A1    R7      *A1
C2       A1    Q2       A1    R8      *A1
C3       A1    Q3       A1    R9      *A1
C4       A1    Q4       A1    R10     *A1
C5       A1    Q5       A1    R11     *A1
               Q6       A1    R12     *A1
CL1      A1    Q7       A1    R13      A1
CL2      A1                   R14      A1
CL3      A1    R1       A1
CL4      A1    R2       A1
               R3      *A1
CN1     *A1    R4      *A1
               R5      *A1
D1       A1    R6      *A1
```

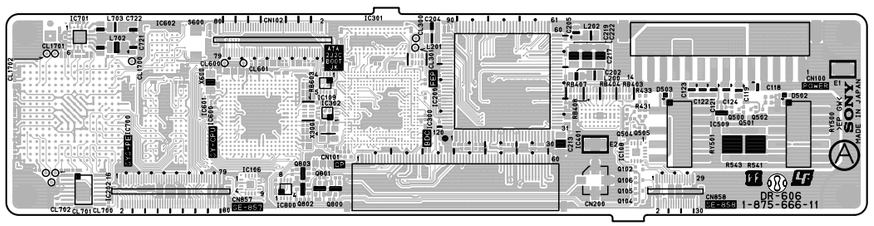


DR-606 -A SIDE-
SUFFIX: -11

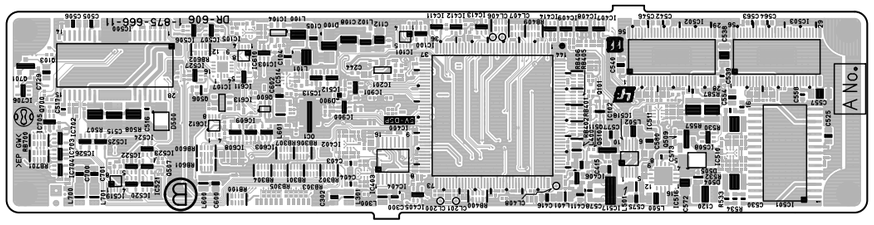


DR-606 -B SIDE-
SUFFIX: -11

DET-45, DET-47, DR-606, DR-617

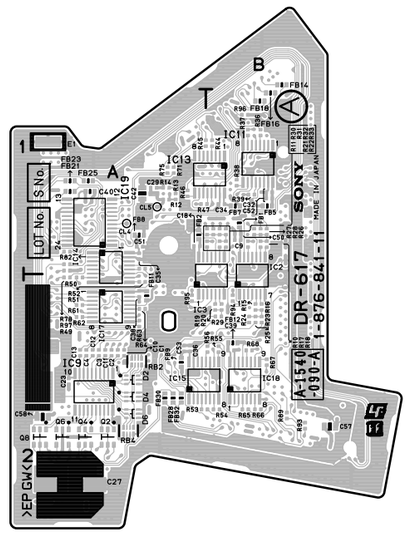


DR-617 -A SIDE-
SUFFIX: -11

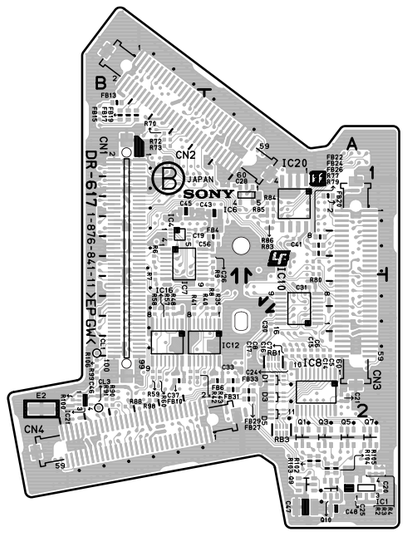


DR-617 -B SIDE-
SUFFIX: -11

```
---------------------
DR-617 (1-876-841-11)
---------------------
*:B SIDE

C1       A2    C53      A2    FB26    *A1   R11      B1    R61      A2
C2       A2    C56     *A1    FB27    *A2   R12      A1    R62      A2
C3       A2    C57      B2    FB28     A2   R13      A1    R63      A2
C4       A2    C58      A2    FB29    *A2   R14      A1    R64      A2
C5      *A2                   FB30     A2   R15      B2    R65      B2
C6      *A2    CL1     *B2    FB31    *A2   R16      B2    R66      B2
C7      *A2    CL3     *B2    FB32     A2   R17      B1    R67      B2
C8      *A2    CL4      A1    FB33    *A2   R18      B1    R68      B2
C9       B1    CL5      A1                  R19      B2    R70     *B1
C10      A2                   IC1     *A2   R20      B2    R71      A1
C11      A2    CN1     *B1    IC2      B2   R21      B1    R72     *B1
C12      A2    CN2     *B1    IC3      B2   R22      B1    R73     *B1
C13      A2    CN3     *A2    IC4     *B1   R23      B2    R75      A1
C14     *A2    CN4     *B2    IC6     *A1   R24      B2    R77     *A1
C15     *A2                   IC7     *B1   R25      B2    R78      A1
C16     *A2    D1      *A2    IC8     *A2   R26      B1    R79     *A1
C17     *A2    D2       A2    IC9      A2   R27      B1    R80     *A1
C18      A1    D3      *A2    IC10    *A2   R28      B1    R82      A1
C19     *B1    D4       A2    IC11     B1   R29      B2    R83     *A1
C20     *A2    D5      *A2    IC12    *A2   R30      B1    R84     *A1
C21     *A2    D6       A2    IC13     B1   R31      B1    R85     *A1
C23      A2                   IC14     A1   R32      B1    R86     *A1
C24     *A2    E1       A1    IC15     A2   R33      B1    R88     *B2
C25     *A2    E2      *B2    IC16    *B2   R35     *A2    R89      B2
C26     *A1                   IC17     A2   R36      B1    R90     *B2
C27      A2    FB1      B1    IC18     B2   R37      B1    R91     *B2
C28     *A1    FB2      A1    IC19     A1   R38      B1    R93      B2
C29      A1    FB4     *A1    IC20    *A1   R39      B1    R94      B2
C30     *A2    FB5      B1    IC21    *B2   R40     *A2    R95      A2
C31     *A2    FB6     *A2                  R41     *B2    R96      B1
C32      B1    FB7      B1    Q1      *A2   R42     *B2    R97      A1
C33     *A2    FB8      A1    Q2       A2   R43     *B2    R98     *B2
C34      B1    FB9      A2    Q3      *A2   R44      B1    R99     *B2
C35      A1    FB10    *B2    Q4       A2   R45      A1    R100    *B2
C36      A2    FB11     A2    Q5      *A2   R46      A1    R102    *A2
C37     *B2    FB12     B2    Q6       A2   R47      A1    R103    *A2
C38      A2    FB13    *B1    Q7      *A2   R48     *B2    R104    *A2
C39      B2    FB14     B1    Q8       A2   R49      A2    R105    *A2
C40      A1    FB15    *B1    Q9      *A2   R50      A2    R106    *B2
C41     *A1    FB16     B1    Q10     *A2   R51      A2
C42      A1    FB17    *B1                  R52      A1    RB1     *A2
C43     *A1    FB18     B1    R2      *A2   R53      A2    RB2      A2
C45     *B1    FB19    *B1    R3      *A2   R54      B2    RB3     *A2
C46     *B2    FB20    *A1    R4      *A2   R55      B2    RB4      A2
C47     *A2    FB21     A1    R6      *B1   R56      B2
C48     *A2    FB22    *A1    R7      *B2   R57     *B2
C50      B1    FB23     A1    R8      *A2   R58     *B2
C51      A1    FB24    *A1    R9      *A1   R59     *B2
C52      B1    FB25     A1    R10      B1   R60     *B2
```

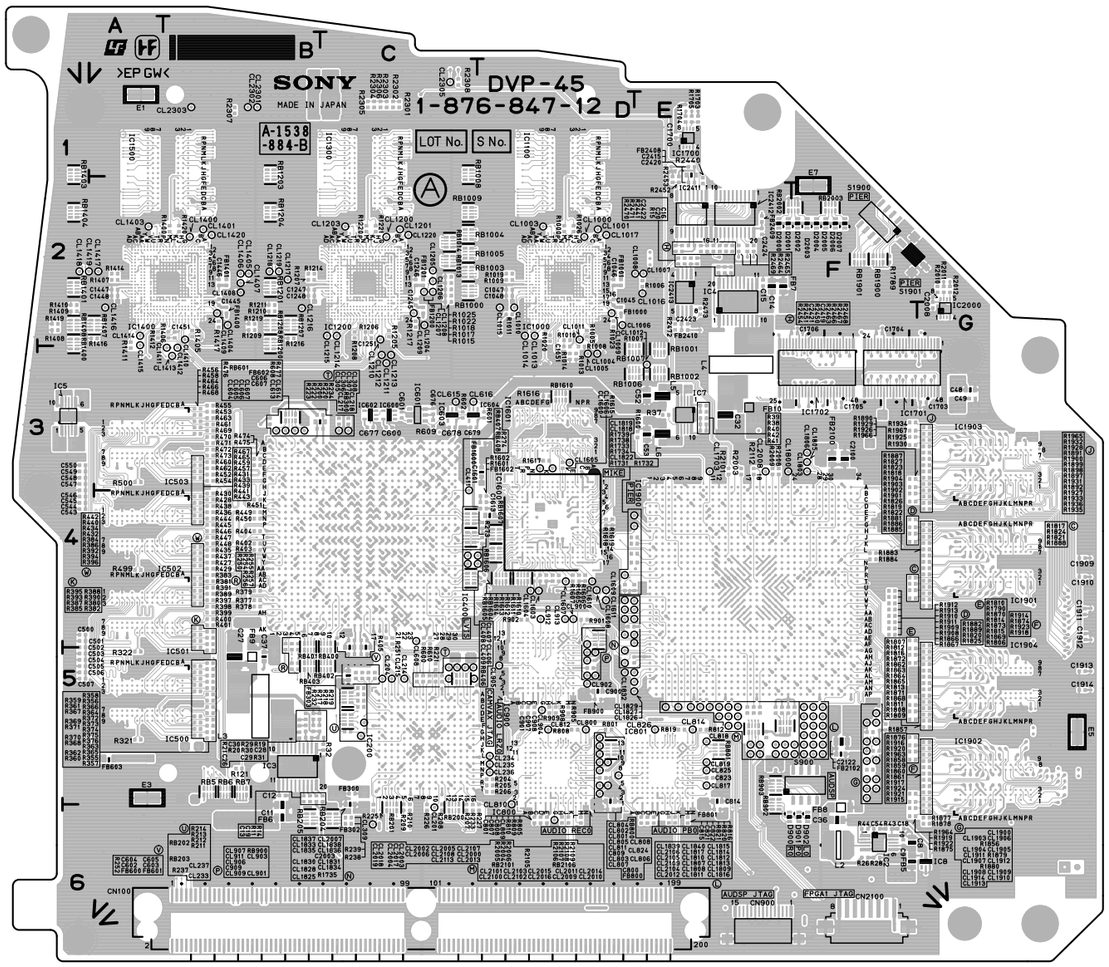

DVP-45 -A SIDE-
SUFFIX: -12

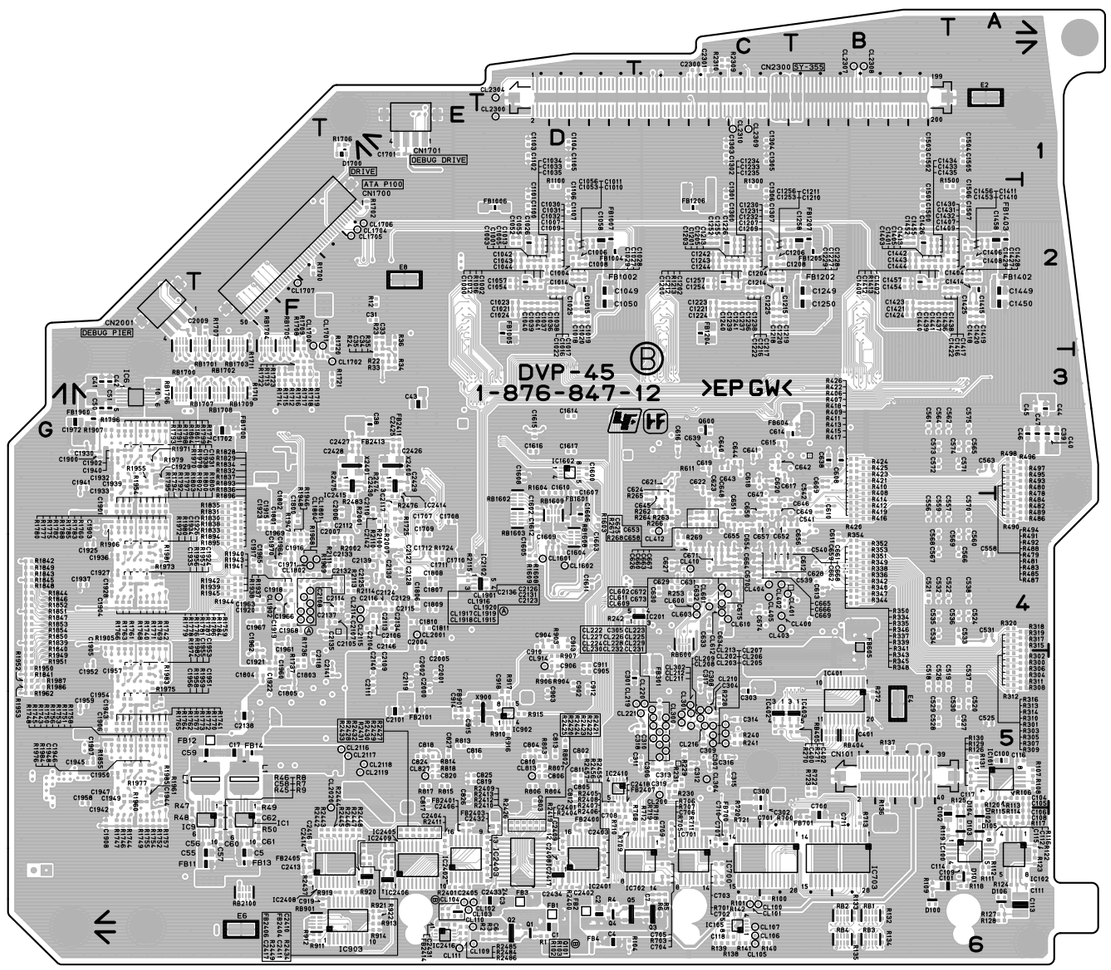


DVP-45 -B SIDE-
SUFFIX: -12

DVP-45 (1-876-847-12)
---
*:B SIDE

C1	*D6	C36	F6	C102	*A6	C315	*C5	C532	*B4	C566	*A4	C619	*C3	C651	*C4	C700	*B6
C2	*D6	C37	B5	C104	*A5	C316	*C5	C533	*A4	C567	*B4	C620	*C3	C652	*C4	C701	*C6
C3	*D6	C38	*E3	C105	*A5	C317	*C5	C534	*B4	C568	*B4	C621	*C3	C653	*C4	C702	*C6
C4	*D6	C39	*A3	C106	*A6	C318	*C5	C535	*B4	C569	*A4	C622	*C3	C654	*C4	C703	*C6
C5	*F6	C40	*A3	C108	*A6	C319	*C5	C536	*A4	C570	*A4	C623	*C4	C655	*C4	C704	*C6
C6	*D6	C41	*G3	C109	*A6	C400	*C5	C537	*A5	C571	*A3	C624	*C4	C656	*B4	C705	*C6
C7	*C6	C42	*G3	C111	*A6	C401	*B5	C538	*A4	C572	*B3	C625	*C4	C657	*C4	C706	*C6
C8	F6	C43	*E3	C112	*A6	C402	*B5	C539	*B4	C573	*B3	C626	*C4	C658	*C4	C707	*C6
C9	F6	C44	*A3	C113	*A6	C500	A4	C540	*B4	C574	*A3	C627	*C4	C659	*C4	C708	*D6
C11	B6	C45	*A3	C114	*A6	C501	A4	C541	*B4	C575	*A3	C628	*C4	C660	*C4	C709	*C6
C12	B5	C46	*A3	C115	*A6	C502	A5	C542	*B3	C600	C3	C629	*C4	C661	*C4	C710	*C6
C13	B5	C47	*A3	C116	*A5	C503	A5	C543	A4	C601	C3	C630	*C4	C662	*C4	C711	*B6
C14	E2	C48	G3	C117	*A5	C504	A5	C544	A4	C602	C5	C631	*C4	C663	*C4	C800	D5
C15	E2	C49	G3	C118	*C6	C505	A5	C545	A4	C603	C5	C632	*C4	C664	*C4	C801	D6
C16	E2	C50	*G3	C300	*C5	C506	A5	C546	A4	C604	C4	C633	*C4	C665	*C4	C802	*D5
C17	*F5	C51	*G3	C301	*C5	C507	A5	C547	A3	C605	C4	C634	*C4	C666	*C4	C803	*D5
C18	F6	C52	E3	C302	*C6	C518	*B5	C548	A3	C606	B3	C638	*B3	C667	*C4	C804	*D5
C19	B5	C53	E3	C303	*C5	C519	*A5	C549	A3	C607	B3	C639	*C3	C668	*C4	C805	*D5
C20	E2	C54	F6	C304	*C5	C520	*A5	C550	A3	C608	*B3	C640	*C3	C669	*C4	C806	*D5
C26	B5	C55	*F6	C305	*C5	C521	*B4	C556	*B4	C609	*B3	C641	*C3	C670	*C4	C807	D6
C27	B5	C56	*F6	C306	*C5	C522	*A4	C557	*A4	C610	*B4	C642	*C3	C671	*C4	C808	D6
C28	B5	C57	*F6	C307	*C5	C524	*A4	C558	*A4	C611	*B4	C643	*C3	C672	*C4	C809	D5
C29	B5	C58	*F6	C308	*C5	C525	*A5	C559	*B4	C612	*B4	C644	*C3	C673	*C4	C810	*D5
C30	B5	C59	*F5	C309	*C5	C526	*B5	C560	*A4	C613	*B4	C645	*C4	C674	*C4	C811	*D5
C31	*E2	C60	*F6	C310	*C5	C527	*A5	C561	*B3	C614	*B3	C646	*C4	C675	*C4	C812	*D5
C32	E3	C61	*F6	C311	*C5	C528	*B5	C562	*A3	C615	*C3	C647	*C4	C676	C3	C813	*D5
C33	*E2	C62	*F6	C312	*C5	C529	*B5	C563	*A3	C616	*C3	C648	*C4	C677	C3	C814	E5
C34	*E3	C100	*A5	C313	*C5	C530	*A5	C564	*B3	C617	*C3	C649	*C4	C678	C3	C815	E6
C35	*E3	C101	*A6	C314	*C5	C531	*A4	C565	*A3	C618	*C3	C650	*C4	C679	C3	C816	*E5

C817	*E5	C1000	*D2	C1029	*D2	C1058	*D2	C1220	*C2	C1249	*B2	C1411	*A2	C1440	*B2	C1602	*D4
C818	*E5	C1001	*D2	C1030	*D2	C1100	*D2	C1221	*C2	C1250	*B2	C1412	*B2	C1441	*B2	C1603	*D4
C819	*E5	C1002	*D2	C1031	*D2	C1101	*D2	C1222	*C2	C1251	C2	C1413	*B2	C1442	*B2	C1604	*D4
C820	*E5	C1003	*D2	C1032	*D2	C1102	*D1	C1223	*C2	C1252	*C2	C1414	*A2	C1443	*B2	C1605	*D4
C821	E6	C1004	*D2	C1033	*D2	C1103	*D1	C1224	*C2	C1253	*C2	C1415	*A2	C1444	*B2	C1606	*D4
C822	E6	C1005	*D2	C1034	*D2	C1104	*D1	C1225	*C2	C1254	*C2	C1416	*A2	C1445	B2	C1607	*D3
C823	E5	C1006	*D2	C1035	*D2	C1105	*D1	C1226	*C2	C1255	*C2	C1417	*A2	C1446	B2	C1608	*D3
C824	*E5	C1007	*D2	C1036	*D2	C1106	*D2	C1227	*C2	C1256	*C2	C1418	*A2	C1447	A2	C1609	*D4
C825	*E5	C1008	*D2	C1037	*D2	C1107	*D2	C1228	*C2	C1257	*C2	C1419	*A2	C1448	A2	C1610	*D3
C826	*E5	C1009	*D2	C1038	*D2	C1200	*C2	C1229	*C2	C1258	*B2	C1420	*A2	C1449	*A2	C1611	*D4
C827	*E5	C1010	*D2	C1039	*D2	C1201	*C2	C1230	*C2	C1300	*C2	C1421	*B2	C1450	*A2	C1612	*D4
C900	D5	C1011	*D2	C1040	*D2	C1202	*C2	C1231	*C2	C1301	*C2	C1422	*B2	C1451	B2	C1613	D4
C901	D5	C1012	*D2	C1041	*D2	C1203	*C2	C1232	*C2	C1302	*C1	C1423	*B2	C1452	*B2	C1614	*D3
C902	*D5	C1013	*D2	C1042	*D2	C1204	*C2	C1233	*C2	C1303	*C1	C1424	*B2	C1453	*A2	C1615	*D3
C903	*D5	C1014	*D2	C1043	*D2	C1205	*C2	C1234	*C2	C1304	*C1	C1425	*A2	C1454	*B2	C1616	*D3
C904	*D4	C1015	*D2	C1044	*D2	C1206	*C2	C1235	*C2	C1305	*C1	C1426	*B2	C1455	*B2	C1617	*D3
C905	*D5	C1016	*D2	C1045	D2	C1207	*C2	C1236	*C2	C1306	*C2	C1427	*A2	C1456	*A2	C1700	E1
C906	*D5	C1017	*D2	C1046	D2	C1208	*C2	C1237	*C2	C1307	*C2	C1428	*A2	C1457	*B2	C1701	*E1
C907	D5	C1018	*D2	C1047	D2	C1209	*C2	C1238	*C2	C1400	*B2	C1429	*A2	C1458	*A2	C1702	*F3
C908	D5	C1019	*D2	C1048	D2	C1210	*C2	C1239	*C2	C1401	*B2	C1430	*A2	C1500	*B2	C1703	G3
C909	D5	C1020	*D2	C1049	*D2	C1211	*C2	C1240	*C2	C1402	*B2	C1431	*A2	C1501	*B2	C1704	F2
C910	*D4	C1021	*D2	C1050	*D2	C1212	*C2	C1241	*C2	C1403	*B2	C1432	*A2	C1502	*B1	C1705	F3
C911	*D5	C1022	*D2	C1051	D3	C1213	*C2	C1242	*C2	C1404	*A2	C1433	*B2	C1503	*B1	C1706	F2
C912	*D5	C1023	*D2	C1052	*D2	C1214	*C2	C1243	*C2	C1405	*B2	C1434	*B2	C1504	*A1	C1707	*E4
C913	*D4	C1024	*D2	C1053	*D2	C1215	*C2	C1244	*C2	C1406	*A2	C1435	*B2	C1505	*A1	C1708	*E4
C914	*E5	C1025	*D2	C1054	*D2	C1216	*C2	C1245	C2	C1407	*A2	C1436	*B2	C1506	*A2	C1709	*E4
C915	*E5	C1026	*D2	C1055	*D2	C1217	*C2	C1246	C2	C1408	*A2	C1437	*B2	C1507	*A2	C1710	*E4
C918	*D5	C1027	*D2	C1056	*D2	C1218	*C2	C1247	B2	C1409	*A2	C1438	*A2	C1600	*D3	C1711	*E4
C919	*E6	C1028	*D2	C1057	*D2	C1219	*C2	C1248	B2	C1410	*A2	C1439	*B2	C1601	D3	C1712	*E4


C1800 *F4
C1801 *F4
C1802 *F4
C1803 *F5
C1804 *F5
C1805 *F5
C1806 *E4
C1807 *E4
C1808 *E4
C1809 *E4
C1810 *E4
C1811 *E4
C1900 *G3
C1901 *G4
C1902 *G3
C1903 *G4
C1904 *G4
C1905 *G4
C1906 *G5
C1907 *G5
C1908 *G6
C1909 G4
C1910 G4
C1911 G4
C1912 G4
C1913 G5
C1914 G5
C1915 *F4
C1916 *F4
C1917 *F4
C1918 *F4
C1919 *F4
C1920 *F4
C1921 *F5
C1922 *F5
C1923 *F4
C1924 *G4
C1925 *G4
C1926 *G4
C1927 *G4
C1928 *G4
C1929 *G3
C1930 *G3
C1931 *G3
C1932 *G3
C1933 *G3
C1934 *G4
C1935 *G4
C1936 *G4
C1937 *G4
C1938 *G3
C1939 *G3
C1940 *G3
C1941 *G3
C1942 *G5
C1943 *G5
C1944 *G5
C1945 *G5
C1946 *G5
C1947 *G5
C1948 *G5
C1949 *G5
C1950 *G5
C1951 *G5
C1952 *G5
C1953 *G5
C1954 *G5
C1955 *G5
C1956 *G5
C1957 *G5
C1958 *G5
C1959 *G5
C1960 *F5
C1961 *F4
C1962 *F4
C1963 *F4
C1964 *F4
C1965 *F4
C1966 *F4
C1967 *F4
C1968 *F4
C1969 *F4
C1970 *F4
C1971 *F4
C1972 *G3
C2000 *E5
C2001 *E5
C2002 *E5
C2003 D4
C2004 *E4
C2005 *E5
C2006 *E4
C2007 *E4
C2008 G2
C2009 *G2
C2100 F3
C2101 *E5
C2104 *E4
C2105 *E4
C2106 *E4
C2107 *E4
C2108 *E4
C2109 *E5
C2110 *E4
C2111 *E5
C2112 *E4
C2113 *E4
C2114 *E4
C2115 *E4
C2116 *E4
C2117 *E4
C2118 *F5
C2119 *E5
C2122 F5
C2123 *E4
C2124 *E4
C2125 *E4
C2126 *E4
C2127 *E4
C2128 *E4
C2129 *E4
C2130 *E4
C2131 *E4
C2132 *E4
C2133 *E4
C2134 *E4
C2135 *E4
C2136 *E4
C2137 *E4
C2138 *F5
C2139 *E4
C2140 *E5
C2141 *E5
C2142 *E4
C2146 *E4
C2300 *C1
C2301 *C1
C2401 *D6
C2402 *D6
C2403 *D6
C2404 *E6
C2405 *E6
C2406 *E6
C2409 *D6
C2410 *E6
C2411 *E6
C2412 *E6
C2414 *E3
C2415 E1
C2416 *F6
C2417 *E6
C2418 *D5
C2419 E2
C2420 E2
C2421 E2
C2422 E2
C2423 E2
C2424 E2
C2425 *E3
C2426 *E3
C2427 *E3
C2428 *E3
C2429 *E3
C2430 *E3
C2431 *E6
C2432 *D6
C2433 *D6
C2434 *D6
CL100 *C6
CL101 *C6
CL102 *E6
CL103 *E6
CL104 *E6
CL105 *C6
CL106 *C6
CL107 *C6
CL109 *E6
CL110 *E6
CL111 *E6
CL200 *C5
CL201 C6
CL202 *C5
CL203 *C5
CL204 C5
CL205 *C5
CL206 *C5
CL207 *C5
CL208 *C5
CL209 *C5
CL210 *C5
CL211 *C5
CL212 *C5
CL213 *C5
CL214 C5
CL215 C5
CL216 *C5
CL217 C5
CL218 C5
CL219 *C5
CL220 *C5
CL221 *C5
CL222 *C5
CL223 *C5
CL224 *C5
CL225 *C5
CL226 *C5
CL227 *C5
CL228 *C5
CL229 *C5
CL230 *C5
CL231 *C5
CL232 *C5
CL233 C5
CL234 D5
CL235 D5
CL236 D5
CL237 C5
CL300 *C5
CL301 *C5
CL302 *C5
CL303 C5
CL304 *C5
CL305 C5
CL306 C5
CL307 C5
CL308 C5
CL309 C6
CL400 *C4
CL401 *C4
CL402 *C4
CL403 *C4
CL404 *C4
CL405 *C4
CL406 D4
CL407 D4
CL408 C4
CL409 C4
CL410 *C4
CL411 C4
CL412 *C4
CL413 C5
CL414 *D5
CL1000 D2
CL1001 D2
CL1003 D2
CL1004 D3
CL1005 D3
CL1006 D2
CL1007 E2
CL1008 E2
CL1009 D2
CL1010 D2
CL1011 D2
CL1012 E3
CL1013 D2
CL1014 D2
CL1015 D2
CL1016 E2
CL1017 D2
CL1200 C2
CL1201 C2
CL1203 C2
CL1204 C2
CL1205 C2
CL1206 C2
CL1207 C2
CL1208 C2
CL1209 C2
CL1210 C2
CL1211 C3
CL1212 C3
CL1213 C3
CL1214 C2
CL1215 C2
CL1216 B2
CL1217 B2
CL1218 B2
CL1219 B2
CL1220 C2
CL1400 B2
CL1401 B2
CL1403 A2
CL1404 B2
CL1405 B2
CL1406 B2
CL1407 B2
CL1408 B2
CL1409 B2
CL1410 B2
CL1411 B3
CL1412 B3
CL1413 B3
CL1414 A2
CL1415 A2
CL1416 A2
CL1417 A2
CL1418 A2
CL1419 A2
CL1420 B2
CL1600 D3
CL1601 *D4
CL1602 *D4
CL1603 D4
CL1604 D4
CL1605 D3
CL1606 D3
CL1607 D4
CL1608 D4
CL1609 D4
CL1610 D4
CL1611 D4
CL1700 *F2
CL1701 *E2
CL1702 *E3
CL1703 E3
CL1704 *E2
CL1705 *E2
CL1706 *E2
CL1707 *F2
CL1800 E3
CL1801 *F4
CL1802 *F4
CL1803 F3
CL1804 *F4
CL1805 F3
CL1806 F3
CL1807 F5
CL1808 F5
CL1809 F5
CL1810 F5
CL1811 F5
CL1812 F5
CL1813 F5
CL1814 F5
CL1815 F5
CL1816 F5
CL1817 F5
CL1818 D4
CL1819 D4
CL1822 D4
CL1825 D5
CL1826 D5
CL1827 D5
CL1828 D5
CL1829 D5
CL1830 D4
CL1831 D4
CL1832 D5
CL1833 D4
CL1834 D4
CL1835 D4
CL1836 D4
CL1837 D4
CL1838 D4
CL1839 F5
CL1840 F5
CL1900 F5
CL1901 *F4
CL1902 *F4
CL1903 F5
CL1904 F5
CL1905 F5
CL1906 F5
CL1907 F5
CL1908 F5
CL1909 F5
CL1910 F5
CL1911 F5
CL1912 F5
CL1913 F5
CL1914 F5
CL1915 *F4
CL1916 *F4
CL1917 *F4
CL1918 *F4
CL1919 *F4
CL1920 *F4
CL2000 E5
CL2001 *E4
CL2002 E5
CL2003 E5
CL2004 E5
CL2005 E5
CL2006 E5
CL2007 D4
CL2008 E3
CL2009 E5
CL2010 F5
CL2011 E5
CL2012 F5
CL2013 E5
CL2014 F5
CL2015 E5
CL2016 E5
CL2017 E5
CL2018 E5
CL2019 E5
CL2020 *E6
CL2100 E5
CL2101 E5
CL2102 E5
CL2103 E5
CL2104 F5
CL2105 F5
CL2106 F5
CL2107 E5
CL2108 E5
CL2109 F5
CL2111 E5
CL2114 *E4
CL2115 *E4
CL2116 *E5
CL2117 *E5
CL2118 *E5
CL2119 *E5
CL2300 *D1
CL2301 B1
CL2302 B1
CL2303 B1
CL2304 *D1
CL2305 C1
CL2307 *B1
CL2308 *B1
CL2309 *C1
CL2310 *C1
CN100 C6
CN101 *B5
CN900 E6
CN1700 *F2
CN1701 *E1
CN2001 *G2
CN2100 F6
CN2300 *C1
D100 *B6
D101 *A6
D102 *A6
D103 *A6
D104 *A6
D105 *A6
D106 *A6
D900 E6
D901 F6
D902 F6
D1700 *E1
D2000 E2
D2001 E2
D2002 F2
D2003 F2
D2004 F2
D2005 F2
D2006 F2
D2007 F2
E1 A1
E2 *A1
E3 A5
E4 *B5
E5 G5
E6 *F6
E7 F2
E8 *E2
FB1 *D6
FB2 *D6
FB3 *D6
FB4 *D6
FB5 F6
FB6 B6
FB7 E2
FB8 F6
FB9 B5
FB10 E3
FB11 *F6
FB12 *F5
FB13 *F6
FB14 *F5
FB300 C5
FB301 *C5
FB302 C6
FB303 C5
FB600 C5
FB601 C5
FB602 B3
FB603 A5
FB604 *B3
FB605 *B4
FB700 *C6
FB701 *B6
FB800 D6
FB801 E6
FB900 D5
FB901 *E5
FB1000 D2
FB1001 D2
FB1002 *D2
FB1004 *D2
FB1005 *D2
FB1006 *D2
FB1007 *D2
FB1200 C2
FB1201 C2
FB1202 *B2
FB1204 *C2
FB1205 *B2
FB1206 *C2
FB1207 *B2
FB1400 B2
FB1401 B2
FB1402 *A2
FB1403 *A2
FB1600 D3
FB1601 *D4
FB1602 D4
FB1700 *F3
FB1900 *G3
FB2100 F3
FB2101 *E5
FB2102 F5
FB2400 *D6
FB2401 *E6
FB2403 *D6
FB2404 *E6
FB2405 *F6
FB2406 *E6
FB2407 *D6
FB2408 E1
FB2409 E2
FB2410 E2
FB2411 *E3
FB2413 *E3
FB2414 *E6
IC1 *F6
IC2 F6
IC3 B5
IC4 E2
IC5 A3
IC6 *G3
IC7 E3
IC8 G6
IC9 *F6
IC100 *A6
IC101 *A5
IC102 *A6
IC105 *C6
IC200 C5
IC201 *C4
IC400 C4
IC401 *B5
IC402 *C5
IC403 *B5
IC500 A5
IC501 A4
IC502 A4
IC503 A3
IC600 C3
IC601 C3
IC602 C3
IC603 C3
IC604 C3
IC700 *C6
IC701 *C6
IC702 *C6
IC703 *B6
IC800 D5
IC801 E5
IC900 D5
IC902 *D5
IC903 *E6
IC1000 D2
IC1100 D1
IC1200 C2
IC1300 C1
IC1400 B2
IC1500 B1
IC1600 D4
IC1601 D3
IC1602 *D3
IC1700 E1
IC1701 F3
IC1702 F3
IC1900 E4
IC1901 G4
IC1902 G5
IC1903 G3
IC1904 G5
IC2000 G2
IC2102 *D4
IC2401 *D6
IC2402 *E6
IC2403 *D6
IC2405 *E6
IC2406 *E6
IC2408 *E6
IC2409 *E6
IC2410 *D5
IC2411 E2
IC2412 E2
IC2413 E2
IC2414 *E3
IC2415 *E3
IC2416 *E6
IC2417 *D6
L1 *F5
L2 F6
L3 B5
L4 E3
L5 E3
L6 E3
L7 *F5
Q1 *D6
Q2 *D6
Q3 *C6
Q4 *D6
Q5 *D6
Q101 *E6
Q600 *C3
R1 *F6
R2 *D6
R3 *D6
R4 *D6
R5 *C6
R6 *C6
R7 *F6
R8 *F5
R9 *F6
R11 B5
R12 *E2
R14 C5
R15 E2
R19 B5
R20 B5
R21 B5
R22 *E3
R23 *E2
R24 *E3
R26 F6
R28 F6
R29 B5
R30 B5
R31 C5
R32 C5
R33 *E3
R34 *E3
R36 *E2
R37 E3
R38 E3
R39 E3
R40 E3
R41 E3
R42 E3
R43 F6
R44 F6
R45 *F6
R46 *F5
R47 *G5
R48 *G6
R49 *F5
R50 *F6
R100 *C6
R101 *C6
R102 *E6
R103 *E6
R104 *D6
R105 *A5
R106 *A5
R107 *A5
R108 *A5
R109 *B6
R111 *A6
R112 *A6
R113 *A5
R114 *A6
R115 *A6
R116 *A6
R117 *A6
R118 *A6
R119 *A6
R120 *A5
R121 B5
R122 *A6
R123 *A6
R124 *A6
R125 *A5
R126 *A5
R127 *A6
R128 *A6
R129 *A5
R130 *A5
R131 *A5
R132 *B6
R133 *B6
R134 *B6
R135 *B6
R136 *B6
R137 *B5
R138 *C6
R139 *C6
R140 *C6
R141 *C6
R142 *C6
R200 C5
R204 D5
R205 D5
R206 D5
R207 C6
R208 C6
R209 C6
R210 C6
R211 C5
R212 C5
R213 C5
R214 C5
R217 C5
R218 C5
R219 C5
R220 C5
R221 C5
R222 C5
R223 C5
R225 C6
R226 C6
R227 D6
R228 *C5
R229 *C5
R230 *C5
R231 *C5
R232 C5
R233 C6
R234 C5
R237 C5
R238 C6
R240 *C5
R241 *C5
R242 *D4
R250 B4
R251 C4
R252 C4
R253 *C4
R254 B4
R255 B4
R256 B5
R257 B5
R262 *C4
R263 *C4
R264 *C4
R265 *C4
R266 *C4
R267 *C4
R268 *C4
R269 *C4
R270 *C5
R271 *B5
R272 *B5
R273 D4
R274 D4
R300 *A5
R301 *A5
R302 *A5
R303 *A5
R304 *A5
R305 *A5
R306 *A5
R307 *A5
R308 *A5
R309 *A5
R310 *A5
R311 *A5
R312 *A5
R313 *A4
R314 *A4
R315 *A5
R316 *A4
R317 *A4
R318 *A4
R319 *A4
R320 *A4
R321 A5
R322 A5
R334 *B4
R335 *B4
R336 *B4
R337 *B4
R338 *B4
R339 *B4
R340 *B4
R341 *B4
R342 *B4
R343 *B4
R344 *B4
R345 *B4
R346 *B4
R347 *B4
R348 *B4
R349 *B4
R350 *B4
R351 *B4
R352 *B4
R353 *B4
R354 *B4
R355 B5
R356 B5
R357 B5
R358 B5
R359 B5
R360 B5
R361 B5
R362 B5
R363 B5
R364 B5
R365 B5
R366 B5
R367 B5
R368 B5
R369 B5
R370 B5
R371 B5
R372 B5
R373 B5
R374 B5
R375 B5
R376 B5
R377 B4
R378 B4
R379 B4
R380 B4
R381 B4
R382 B5
R383 B4
R384 B4
R385 B5
R386 B4
R387 B4
R388 B4
R389 B4
R390 B4
R391 B4
R392 B4
R393 B4
R394 B4
R395 B4
R396 B4
R397 B4
R398 B4
R399 B4
R400 B4
R401 B4
R402 B4
R403 B4
R404 B4
R405 C4
R406 *B3
R407 *B3
R408 *B4
R409 *B3
R410 *B3
R411 *B4
R412 *B4
R413 *B4
R414 *B4
R415 *B4
R416 *B4
R417 *B4
R418 *B3
R419 *B4
R420 *B4
R421 *B3
R422 *B3
R423 *B3
R424 *B3
R425 *B3
R426 *B3
R427 B4
R428 B4
R429 B4
R430 B4
R431 B4
R432 B4
R433 B4
R434 B4
R435 B4
R436 B4
R437 B4
R438 B4
R439 B4
R440 B4
R441 B4
R442 B4
R443 B4
R444 B4
R445 B4
R446 B4
R447 B4
R448 B4
R449 B4
R450 B4
R451 B4
R452 B3
R453 B3
R454 B3
R455 B3
R456 B3
R457 B3
R458 B3
R459 B3
R460 B3
R461 B3
R462 B3
R463 B3
R464 B3
R465 B3
R466 B3
R467 B3
R468 B3
R469 B3
R470 B3
R471 B3
R472 B3
R473 B3
R474 B3
R475 B3
R476 B3
R477 C3
R478 *A4
R479 *A3
R480 *A3
R481 *A4
R482 *A4
R483 *A4
R484 *A4
R485 *A4
R486 *A4
R487 *A4
R488 *A3
R489 *A4
R490 *A4
R491 *A3
R492 *A3
R493 *A3
R494 *A3
R495 *A3
R496 *A3
R497 *A3
R498 *A3
R499 A4
R500 A3
R600 C4
R601 D3
R602 C3
R608 C3
R609 C3
R610 C4
R611 *C3
R700 *C6
R701 *C6
R703 *C6
R705 *C6
R706 *C6
R707 *C6
R708 *C6
R709 *D6
R710 *D6
R711 *C6
R712 *C6
R713 *B6
R718 *C6
R719 *C6
R720 *C6
R721 *C6
R722 *B5
R723 *B5
R801 D5
R802 *D5
R803 *D5
R804 *D5
R805 D6
R806 *D5
R807 *D5
R808 D5
R809 D6
R810 D6
R812 E5
R813 *E5
R814 *E5
R815 *E5
R816 E6
R817 *E5
R818 *E5
R819 E5
R820 E6
R821 E6
R901 D4
R902 D4
R903 *D4
R904 *D5
R905 D5
R906 *D5
R907 *D5
R908 D5
R909 D5
R910 *D5
R911 *F6
R912 *F6
R913 *E6
R914 *E6
R915 *D5
R916 *D5
R917 *D5
R919 *E6
R920 *E6
R921 *E6
R922 *E6
R1000 D2
R1005 D2
R1006 E2
R1007 E3
R1008 D3
R1009 D2
R1010 D2
R1011 D2
R1013 D3
R1014 A2
R1015 C2
R1016 *D2
R1017 C2
R1018 C2
R1019 D2
R1020 D2
R1022 C2
R1023 D2
R1025 C2
R1026 D2
R1100 *D2
R1205 C2
R1206 C2
R1207 B2
R1208 C2
R1209 B2
R1210 B2
R1211 B2
R1213 *C2
R1214 B2
R1216 B2
R1217 C2
R1219 B2
R1220 C2
R1221 C2
R1300 *C2
R1400 B2
R1405 B2
R1406 B2
R1407 A2
R1408 A2
R1409 A2
R1410 A2
R1411 A2
R1412 A2
R1413 *B2
R1414 A2
R1416 A2
R1417 B2
R1419 A2
R1420 B2
R1500 *A2
R1600 E3
R1601 D4
R1602 D4
R1603 *D4
R1604 *D3
R1605 D4
R1606 D4
R1607 D4
R1608 *D4
R1609 *D4
R1610 D4
R1611 D4
R1612 D4
R1613 D4
R1614 D4
R1615 D3
R1616 D3
R1617 D3
R1618 D4
R1619 D4
R1700 *F2
R1702 *E2
R1703 E1
R1704 E1
R1705 E1
R1706 *E1
R1707 *F2
R1708 *F2
R1709 *F2
R1710 *F3
R1711 *F2
R1712 *F3
R1713 *F3
R1714 *F3
R1715 *F3
R1716 *F3
R1717 *F3
R1718 *F3
R1719 *F3
R1720 *E2
R1721 *E3
R1722 *F3
R1723 *F3
R1724 *E4
R1725 *E4
R1731 D4
R1732 D4
R1733 D4
R1734 D4
R1735 D5
R1736 *F5
R1737 *F5
R1738 D4
R1739 D4
R1740 *G4
R1741 *G5
R1742 *G4
R1743 *G5
R1744 *G6
R1745 *G5
R1746 *G6
R1747 *G6
R1748 *G5
R1749 *G6
R1750 *G5
R1751 *G5
R1752 *G6
R1753 *G5
R1754 *G6
R1755 *G6
R1756 *G5
R1757 *G6
R1758 *G5
R1759 *G4
R1760 *G4
R1761 *G4
R1762 *G5
R1763 *G4
R1764 *G5
R1765 *G5
R1766 *G4
R1767 *G5
R1768 *G4
R1769 *G4
R1770 *G5
R1771 *G4
R1772 *G5
R1773 *G5
R1774 *G3
R1775 *G4
R1776 *G4
R1777 *G4
R1778 *G4
R1779 *G4
R1780 *G4
R1781 *G4
R1782 *G4
R1783 *G4
R1784 *G4
R1785 *G4
R1786 *G4
R1787 *G4
R1788 *G4
R1789 F2
R1790 F5
R1791 *G3
R1792 *G4
R1793 *G3
R1794 *G4
R1795 *G4
R1796 *G3
R1797 *G4
R1798 *G3
R1799 *G3
R1800 *G4
R1801 *G3
R1802 *G4
R1803 *G4
R1804 *G3
R1805 *G4
R1806 F5
R1807 G4
R1808 *F4
R1809 F4
R1810 F4
R1811 G5
R1812 G5
R1813 G5
R1814 F5
R1815 F5
R1816 G5
R1817 F4
R1818 G4
R1819 G4
R1820 F4
R1821 F4
R1822 G4
R1823 G4
R1824 F4
R1825 F4
R1826 G4
R1827 G4
R1828 *F4
R1829 *F4
R1830 *F4
R1831 *F4
R1832 *F4
R1833 *F4
R1834 *F4
R1835 *F4
R1836 *F4
R1837 *F4
R1838 *F4
R1839 *G4
R1840 *G4
R1841 *G5
R1842 *G4
R1843 *G4
R1844 *G4
R1845 *G4
R1846 *G4
R1847 *G4
R1848 *G4
R1849 *G4
R1850 *G4
R1851 *G4
R1852 *G4
R1853 *G4
R1854 *G4
R1855 *G5
R1856 F5
R1857 F5
R1858 G5
R1859 G5
R1860 G5
R1861 G5
R1862 G5
R1863 G5
R1864 G5
R1865 G5
R1866 F4
R1867 F4
R1868 G5
R1869 F5
R1870 F5
R1871 G5
R1872 G5
R1873 F5
R1874 F5
R1875 F6
R1876 G5
R1877 G6
R1878 G6
R1879 F5
R1880 F5
R1881 G4
R1882 F4
R1883 F4
R1884 F4
R1885 G4
R1886 G4
R1887 G4
R1888 F4
R1889 F4
R1890 F3
R1891 G3
R1892 G3
R1893 *F4
R1894 *F4
R1895 *F4
R1896 *F4
R1897 G3
R1898 G3
R1899 G3
R1900 G3
R1901 G4
R1902 G4
R1903 G4
R1904 G4
R1905 *G4
R1906 *G4
R1907 *G3
R1908 F4
R1909 F4
R1910 F4
R1911 F4
R1912 F4
R1913 F4
R1914 F5
R1915 G6
R1916 G5
R1917 G5
R1918 F5
R1919 F4
R1920 F6
R1921 G6
R1922 F6
R1923 F5
R1924 G5
R1925 F3
R1926 F4
R1927 G4
R1928 G3
R1929 F3
R1930 F3
R1931 G3
R1932 G3
R1933 G4
R1934 F3
R1935 G4
R1936 G4
R1937 *F4
R1938 *F4
R1939 *F4
R1940 *F4
R1941 *F4
R1942 *F4
R1943 *F4
R1944 *F4
R1945 *F4
R1946 *F4
R1947 *F4
R1948 *F4
R1949 *G5
R1950 *G5
R1951 *G5
R1952 *G5
R1953 *G5
R1954 *G5
R1955 *G3
R1956 *G4
R1957 *G4
R1958 *G5
R1959 *G5
R1960 *G5
R1961 *G5
R1962 *G5
R1963 G5
R1964 F5
R1965 G3
R1966 F4
R1967 F3
R1968 *F4
R1969 *F4
R1970 *G3
R1971 *G3
R1972 *G4
R1973 *G4
R1974 *G5
R1975 *G5
R1976 *G5
R1977 *G5
R1978 *G3
R1979 *G3
R1980 *G4
R1981 *G4
R1982 *G5
R1983 *G5
R1984 *G5
R1985 *G5
R1986 *G5
R1987 *G5
R1988 *E4
R1989 *E6
R1990 *E6
R1991 *E6
R1992 *E6
R1993 *E6
R2001 *E4
R2002 *E4
R2003 E3
R2004 E5
R2005 E5
R2006 E5
R2007 *E4
R2008 E3
R2009 E3
R2010 G2
R2011 G2
R2012 G2
R2100 *E4
R2101 E3
R2102 E5
R2103 E5
R2104 *E4
R2105 E5
R2106 E5
R2107 E5
R2108 E5
R2109 F5
R2110 *E4
R2111 *E4
R2112 E3
R2113 *E4
R2114 *E4
R2115 *E4
R2116 *E4
R2117 *E4
R2118 *E4
R2119 *E4
R2120 *E4
R2121 *E6
R2122 *D6
R2123 *D6
R2124 *D6
R2125 *D6
R2126 *D6
R2127 *D6
R2128 *D6
R2129 *E3
R2130 *E3
R2131 *E3
R2132 *E3
R2133 *E3
R2134 *E3
R2135 *E3
R2136 *E3
R2137 *E3
R2138 *E3
R2139 *E3
R2140 *E3
R2141 *E3
R2142 *E3
R2143 *E3
R2144 *E3
R2145 *E3
R2146 *E3
R2147 *E3
R2148 *E3
R2149 *E3
R2150 *E3
R2151 *E3
R2152 *E3
R2153 *E3
R2154 *E3
R2155 *E3
R2156 *E3
R2157 *E3
R2158 *E3
R2159 *E3
R2160 *E3
R2161 *E3
R2162 *E3
R2163 *E3
R2164 *E3
R2165 *E3
R2166 *E3
R2167 *E3
R2168 *E3
R2169 *E3
R2170 *E3
R2171 *E3
R2172 *E3
R2173 *E3
R2174 *E3
R2175 *E3
R2176 *E4
R2177 *E4
R2178 *E4
R2179 *E4
R2180 *E4
R2181 *E4
R2182 *E4
R2183 *E4
R2184 *E6
R2185 *E6
R2186 *E6
R2187 *E6
R2188 *E6
R2189 *E6
R2190 *E6
R2191 *E6
R2192 *E6
R2193 *E6
R2194 *E6
R2195 *E6
R2196 *E6
R2197 *E6
R2198 *E6
R2199 *E6
R2200 *E6
R2201 *E6
R2202 *E6
R2203 *E6
R2204 *E6
R2205 *E6
R2206 *E6
R2207 *E6
R2208 *E6
R2209 *E6
R2210 *E6
R2211 *E6
R2212 *E6
R2213 *E6
R2214 *E6
R2215 *E6
R2216 *E6
R2217 *E6
R2218 *E6
R2219 *E6
R2220 *E6
R2221 *E6
R2222 *E6
R2223 *E6
R2224 *E6
R2225 *E6
R2226 *E6
R2227 *E6
R2228 *E6
R2229 *E6
R2230 *E6
R2231 *E6
R2232 *E6
R2233 *E6
R2234 *E6
R2235 *E6
R2236 *E6
R2237 *E6
R2238 *E6
R2239 *E6
R2240 *E6
R2241 *E6
R2242 *E6
R2243 *E6
R2244 *E6
R2245 *E6
R2246 *E6
R2247 *E6
R2248 *E6
R2249 *E6
R2250 *E6
R2251 *E6
R2252 *E6
R2253 *E6
R2254 *E6
R2255 *E6
R2256 *E6
R2257 *E6
R2258 *E6
R2259 *E6
R2260 *E6
R2261 *E6
R2262 *E6
R2263 *E6
R2264 *E6
R2265 *E6
R2266 *E6
R2267 *E6
R2268 *E6
R2269 *E6
R2270 *E6
R2271 *E6
R2272 *E6
R2273 *E6
R2274 *E6
R2275 *E6
R2276 *E6
R2277 *E6
R2278 *E6
R2279 *E6
R2280 *E6
R2281 *E6
R2282 *E6
R2283 *E6
R2284 *E6
R2285 *E6
R2286 *E6
R2287 *E6
R2288 *E6
R2289 *E6
R2290 *E6
R2291 *E6
R2292 *E6
R2293 *E6
R2294 *E6
R2295 *E6
R2296 *E6
R2297 *E6
R2298 *E6
R2299 *E6
R2300 *E6
R2301 *E6
R2302 *E6
R2303 *E6
R2304 *E6
R2305 *E6
R2306 *E6
R2307 *E6
R2308 *E6
R2309 *E6
R2310 *E6
R2311 *E6
R2312 *E6
R2313 *E6
R2314 *E6
R2315 *E6
R2316 *E6
R2317 *E6
R2318 *E6
R2319 *E6
R2320 *E6
R2321 *E6
R2322 *E6
R2323 *E6
R2324 *E6
R2325 *E6
R2326 *E6
R2327 *E6
R2328 *E6
R2329 *E6
R2330 *E6
R2331 *E6
R2332 *E6
R2333 *E6
R2334 *E6
R2335 *E6
R2336 *E6
R2337 *E6
R2338 *E6
R2339 *E6
R2340 *E6
R2341 *E6
R2342 *E6
R2343 *E6
R2344 *E6
R2345 *E6
R2346 *E6
R2347 *E6
R2348 *E6
R2349 *E6
R2350 *E6
R2351 *E6
R2352 *E6
R2353 *E6
R2354 *E6
R2355 *E6
R2356 *E6
R2357 *E6
R2358 *E6
R2359 *E6
R2360 *E6
R2361 *E6
R2362 *E6
R2363 *E6
R2364 *E6
R2365 *E6
R2366 *E6
R2367 *E6
R2368 *E6
R2369 *E6
R2370 *E6
R2371 *E6
R2372 *E6
R2373 *E6
R2374 *E6
R2375 *E6
R2376 *E6
R2377 *E6
R2378 *E6
R2379 *E6
R2380 *E6
R2381 *E6
R2382 *E6
R2383 *E6
R2384 *E6
R2385 *E6
R2386 *E6
R2387 *E6
R2388 *E6
R2389 *E6
R2390 *E6
R2391 *E6
R2392 *E6
R2393 *E6
R2394 *E6
R2395 *E6
R2396 *E6
R2397 *E6
R2398 *E6
R2399 *E6
R2400 *E6
R2401 *E6
R2402 *E6
R2403 *E6
R2404 *E6
R2405 *E6
R2406 *E6
R2407 *E6
R2408 *E6
R2409 *E6
R2410 *E6
R2411 *E6
R2412 *E6
R2413 *E6
R2414 *E6
R2415 *E6
R2416 *E6
R2417 *E6
R2418 *E6
R2419 *E6
R2420 *E6
R2421 *E6
R2422 *E6
R2423 *E6
R2424 *E6
R2425 *E6
R2426 *E6
R2427 *E6
R2428 *E6
R2429 *E6
R2430 *E6
R2431 *E6
R2432 *E6
R2433 *E6
R2434 *E6
R2435 *E6
R2436 *E6
R2437 *F6
R2438 *E6
R2439 *E6
R2440 E2
R2441 E2
R2442 *E6
R2443 *E6
R2444 *E6
R2445 *E6
R2446 *E6
R2447 *E6
R2448 *E6
R2449 *E6
R2450 E2
R2451 E2
R2452 E2
R2453 E2
R2454 E2
R2455 *D6
R2456 *D6
R2457 *D6
R2458 *E6
R2459 *E6
R2460 *E6
R2461 *E6
R2462 *E6
R2463 E2
R2464 E2
R2465 E2
R2466 E2
R2467 E2
R2468 E2
R2469 E2
R2470 E2
R2471 E2
R2472 E2
R2473 E2
R2474 *E3
R2475 *E3
R2476 *E4
R2483 *E4
R2484 *E6
R2485 *E6
R2486 *E6
RB1 *B6
RB2 *B6
RB3 *B6
RB4 *B6
RB5 B5
RB6 B5
RB7 B5
RB200 C6
RB201 C6
RB202 C5
RB203 C5
RB204 C6
RB205 B6
RB300 C5
RB400 C4
RB401 B4
RB402 C5
RB403 B5
RB404 *B5
RB405 *B5
RB406 C4
RB407 C4
RB408 C4
RB600 *C4
RB601 B3
RB800 D5
RB801 E5
RB900 D4
RB901 *F6
RB902 E6
RB1000 C2
RB1001 E3
RB1002 E3
RB1003 C2
RB1004 C2
RB1005 C2
RB1006 D3
RB1007 D3
RB1008 C1
RB1009 C2
RB1013 C2
RB1014 C2
RB1200 B2
RB1201 B2
RB1203 B1
RB1204 B2
RB1207 B2
RB1208 B2
RB1400 A2
RB1401 A2
RB1403 A1
RB1404 A2
RB1407 A2
RB1408 A2
RB1602 *D4
RB1603 *D4
RB1604 D4
RB1605 D4
RB1606 D4
RB1607 D4
RB1608 *D4
RB1609 *D4
RB1610 D3
RB1700 *G2
RB1701 *F2
RB1702 *F2
RB1703 *F2
RB1704 *F2
RB1705 *F2
RB1706 *G3
RB1707 *F3
RB1708 *F3
RB1709 *F3
RB1900 F2
RB2002 F2
RB2003 F2
RB2100 *F6
RB2101 E5
RB2106 E5
S900 F5
S1900 F2
S1901 F2
X900 *D5
X2400 *E3
X2401 *E3



ENC-118 -A SIDE-
SUFFIX: -11




ENC-118 -B SIDE-
SUFFIX: -11

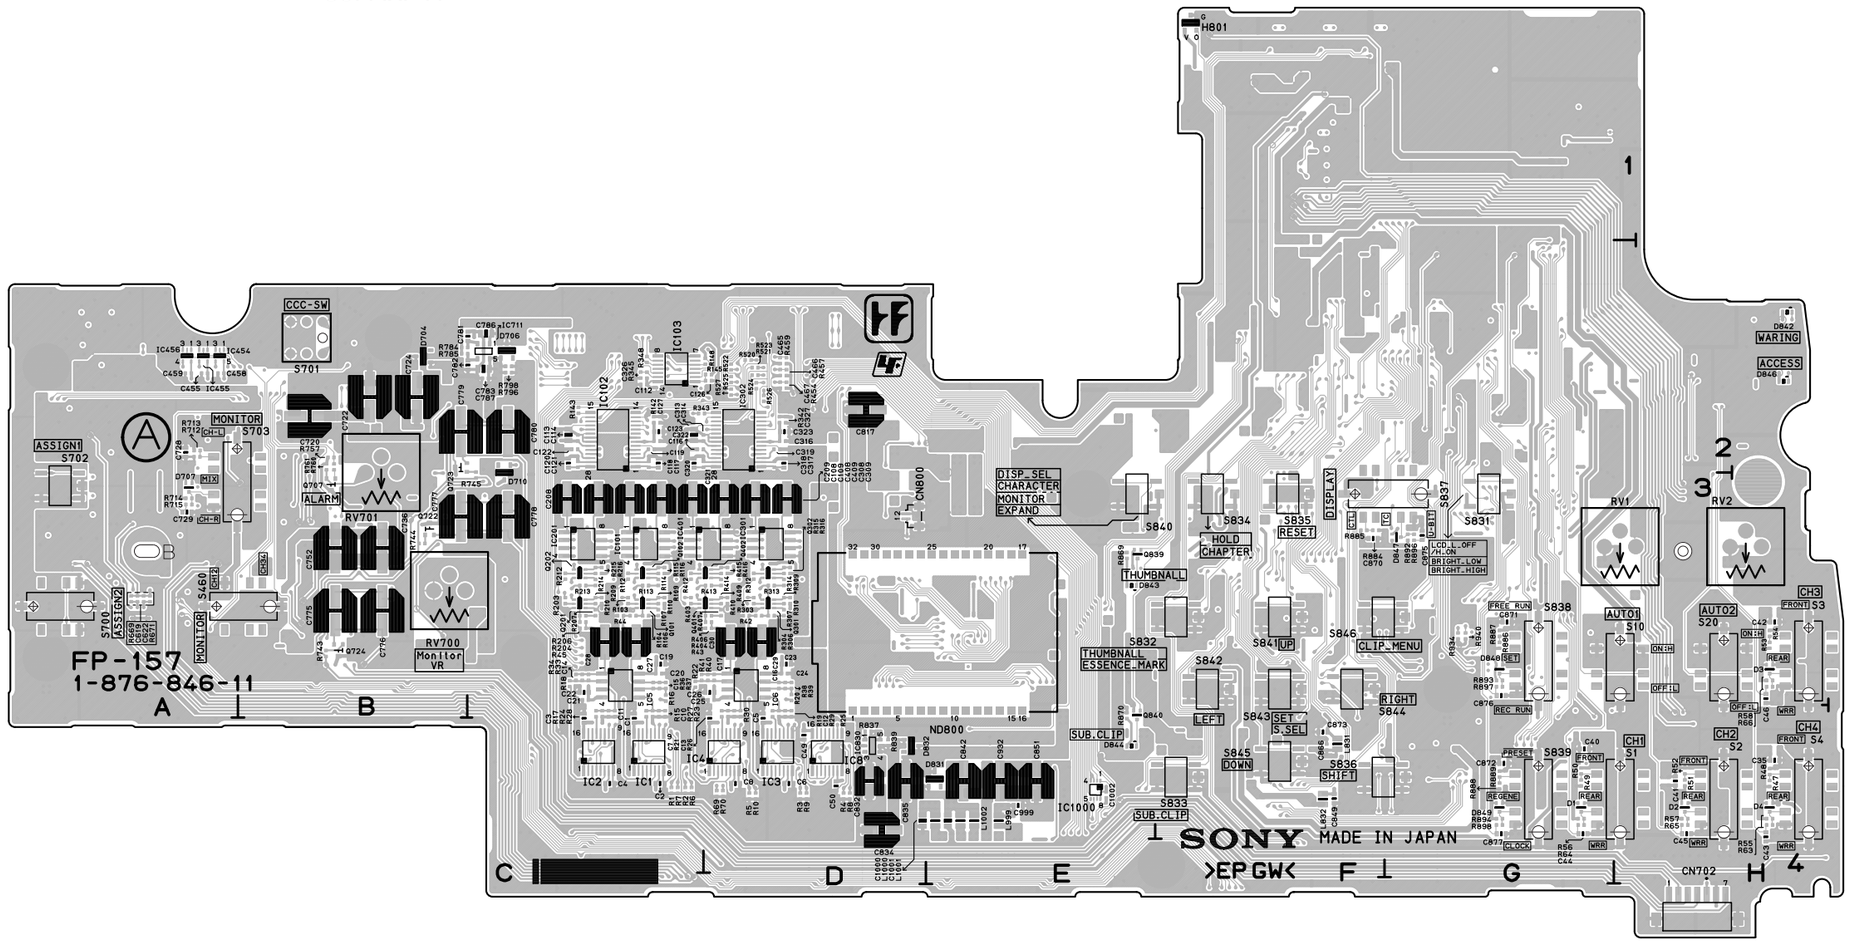


FP-157 -A SIDE-
SUFFIX: -11


FP-157, HP-148, HP-149




HP-148 -A SIDE-
SUFFIX: -11




HP-148 -B SIDE-
SUFFIX: -11



HP-149 -A SIDE-
SUFFIX: -11



HP-149 -B SIDE-
SUFFIX: -11

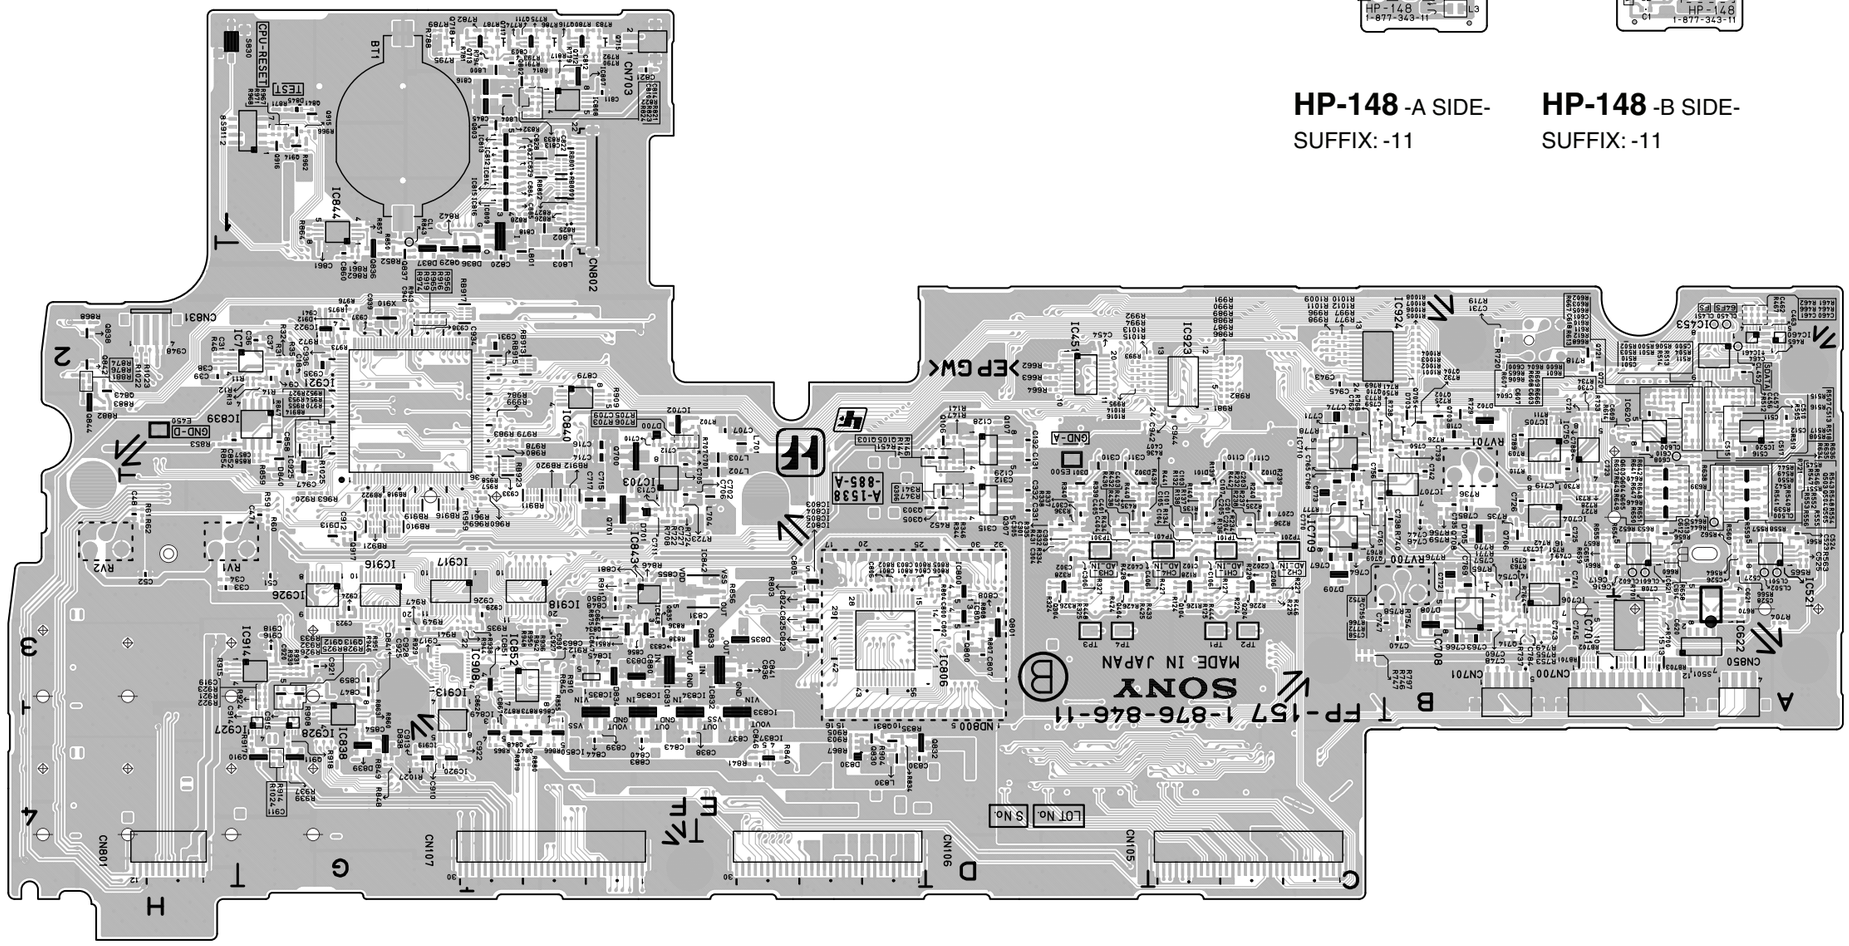


Components location list ; next page

FP-157 -B SIDE-
SUFFIX: -11


FP-157 (1-876-846-11)
---
*:B SIDE

BT1	*G1	C303	*D3	C713	*F3	C821	*F1	C944	*C2	IC301	D3	L832	F4	R4	D4	R144	*D2	R448	*D3	R644	*A3	R769	*C2	R876	*H2	R982	*C2	S845	F4
		C304	*D3	C714	*F2	C822	*F1	C945	*C2	IC302	D2	L999	E4	R5	D4	R145	D2	R451	*D2	R645	*A3	R770	*B3	R879	*F4	R983	*F2	S846	F3
C1	C4	C305	*D3	C715	*F3	C823	*E3	C947	*G3	IC401	D3	L1000	E4	R6	C4	R146	*D2	R452	*D3	R646	*A3	R771	*B3	R880	*F4	R984	*F2	S911	*G1
C2	C4	C306	*D3	C716	*F2	C824	*E3	C948	*H2	IC451	*D2	L1001	E4	R7	C4	R147	*D2	R454	D2	R647	*A3	R772	*C3	R881	*H2	R986	*C2		
C3	C4	C307	*D3	C717	*F3	C825	*E3	C999	E4	IC453	*A2	L1002	E4	R8	D4	R148	D2	R457	D2	R648	*A3	R773	*C2	R882	*H2	R987	*C2	TP1	*C3
C4	C4	C308	D3	C718	*B2	C827	*F1	C1000	D4	IC454	A2			R9	D4	R203	C3	R459	D2	R649	*A3	R774	*F1	R883	*H2	R988	*C2	TP2	*C3
C5	D4	C309	D3	C719	*B3	C828	*F1	C1001	E4	IC455	A2	ND800	E3	R10	D4	R204	C3	R461	*A2	R650	*A3	R775	*F1	R884	F3	R989	*C2	TP3	*D3
C6	D4	C310	*D2	C720	B2	C829	*F1	C1002	E4	IC456	A2			R11	*G2	R206	C3	R462	*A2	R651	*A3	R776	*B3	R885	F3	R990	*C2	TP4	*D3
C7	D4	C311	*D2	C721	*B2	C830	*E4			IC460	*A2	Q101	C3	R12	*G2	R207	C3	R464	*A2	R652	*A3	R777	*C3	R886	G3	R991	*C2	TP101	*C3
C8	D4	C312	*D3	C722	B2	C831	*E3	CL1	*G1	IC461	*A2	Q102	C3	R13	*G2	R209	C3	R465	*A2	R653	*A3	R778	*C2	R887	G3	R992	*D2	TP201	*C3
C9	*G2	C313	C2	C723	*B2	C832	D4	CL450	*A2	IC520	*A2	Q103	*D2	R14	*G2	R210	C3	R466	*A2	R654	*B3	R779	*F1	R888	G4	R993	*D2	TP301	*D3
C10	C4	C314	C2	C724	B2	C833	*F3	CL451	*A2	IC521	*A3	Q104	*C3	R15	C4	R212	C3	R467	*A2	R655	*B3	R780	*F1	R889	G4	R994	*D2	TP401	*C3
C11	C4	C315	*D3	C725	*B3	C834	D4	CL452	*A2	IC620	*A2	Q105	*D2	R16	C3	R213	C3	R500	*A2	R656	*A3	R781	*F1	R892	G3	R995	*D2		
C12	D4	C316	D2	C726	*B3	C835	D4	CL500	*A3	IC621	*A3	Q106	*D2	R17	C4	R214	C3	R501	*A2	R657	*B3	R782	*F1	R893	G3	R996	*C2	X910	*G2
C13	D4	C317	D2	C727	*F3	C836	*E3	CL501	*A3	IC622	*A3	Q107	*D2	R18	C3	R215	C3	R502	*A2	R658	*A3	R783	*F1	R894	G4	R997	*C2		
C14	C3	C318	D2	C728	A2	C837	*E4	CL502	*A3	IC701	*A3	Q201	C3	R19	D4	R216	C3	R503	*A2	R659	*B3	R784	B2	R896	G3	R998	*C2		
C15	C3	C319	D2	C729	A3	C838	*F4	CL600	*A2	IC702	*F2	Q202	C3	R20	D3	R224	*C3	R504	*A2	R660	*A3	R785	B2	R897	G3	R999	*F2		
C16	D3	C320	C2	C730	*B2	C839	*F4	CL601	*A3	IC703	*F3	Q204	*C3	R21	D4	R225	*C3	R505	*A2	R661	*B3	R786	*F1	R898	G4	R1001	*B2		
C17	D3	C321	C2	C731	*B2	C840	*F4	CL602	*A3	IC704	*B3	Q301	D3	R22	C3	R226	*C3	R506	*A2	R662	*D2	R787	*F1	R903	*E4	R1002	*B2		
C18	*G2	C322	C2	C735	*B3	C841	*E3			IC705	*B2	Q302	D3	R23	C4	R227	*C3	R507	*A2	R663	*D2	R788	*G1	R904	*E4	R1003	*B2		
C19	C3	C323	D2	C736	B3	C842	E4	CN105	*C4	IC706	*B3	Q303	*D3	R24	C4	R228	*C3	R508	*A2	R664	*D2	R789	*G1	R905	*E4	R1004	*B2		
C20	C3	C326	C2	C737	*B3	C843	*F4	CN106	*E4	IC707	*B3	Q304	*D3	R25	D4	R232	*C3	R510	*A2	R665	*A2	R790	*F1	R908	*G4	R1005	*B2		
C21	C3	C327	D2	C738	*B3	C844	*F4	CN107	*F4	IC708	*B3	Q305	*D3	R26	D4	R234	*C3	R511	*A2	R666	*A2	R791	*F1	R909	*F2	R1006	*B2		
C22	C3	C331	*D3	C739	*B2	C845	*F1	CN700	*A3	IC709	*C3	Q306	*D3	R27	C4	R235	*C3	R512	*A2	R667	*A2	R792	*F1	R910	*F3	R1007	*B2		
C23	D3	C332	*D3	C740	*B3	C846	*E4	CN701	*B3	IC710	*C2	Q307	*D3	R28	C4	R236	*C3	R513	*A2	R668	*A2	R793	*F1	R911	*F3	R1008	*B2		
C24	D3	C401	*D3	C741	*B3	C847	*G3	CN702	H4	IC711	C2	Q401	D3	R29	D4	R237	*C3	R514	*A2	R669	A3	R794	*F1	R912	*F3	R1009	*C2		
C25	D3	C402	*D3	C742	*B2	C848	*F3	CN703	*F1	IC750	*B2	Q402	D3	R30	D4	R238	*C3	R515	*A2	R670	*A3	R795	*G1	R914	*G4	R1010	*C2		
C26	D3	C403	*D3	C743	*B3	C849	F4	CN800	D3	IC800	*D3	Q404	*D3	R31	*G2	R239	*C3	R516	*A2	R671	A3	R796	C2	R915	*H3	R1011	*C2		
C27	C3	C404	*D3	C744	*B3	C850	*F3	CN801	*H4	IC801	*D3	Q503	*A3	R32	*G2	R240	*C3	R517	*A2	R700	*A3	R797	*C3	R916	*G2	R1012	*C2		
C28	C3	C405	*D3	C745	*B3	C851	E4	CN802	*F1	IC802	*E3	Q504	*A3	R33	C3	R303	D3	R518	*A2	R701	*A3	R798	C2	R917	*G4	R1013	*D2		
C29	D3	C406	*D3	C746	*B3	C852	*H2	CN831	*H2	IC803	*E3	Q505	*A3	R34	C3	R304	D3	R519	*A2	R702	*F2	R800	*E3	R918	*G4	R1014	*D2		
C30	D3	C407	*D3	C747	*B3	C854	*G4	CN850	*A3	IC804	*E3	Q603	*A3	R35	*G2	R306	D3	R520	D2	R703	*F2	R801	*E3	R919	*G2	R1015	*D2		
C31	*H2	C408	C3	C748	*B3	C855	*F3			IC805	*E3	Q604	*A3	R36	C3	R307	D3	R521	D2	R704	*A3	R802	*E3	R920	*G3	R1016	*D2		
C33	*H3	C409	D3	C749	*B3	C856	*F3	D1	G4	IC806	*E3	Q605	*A3	R37	C3	R309	D3	R522	D2	R705	*F2	R803	*E3	R921	*G3	R1022	*H2		
C34	*H3	C454	*D2	C750	*B2	C857	*G2	D2	H4	IC807	*F1	Q700	*F2	R38	D3	R310	D3	R523	D2	R706	*F2	R804	*D3	R922	*G3	R1023	*H2		
C35	H4	C455	A2	C751	*B3	C858	*G2	D3	H3	IC808	*F1	Q701	*F3	R39	D3	R312	D3	R524	D2	R707	*F2	R805	*D3	R923	*G3	R1024	*G4		
C36	*G2	C456	*A2	C752	B3	C859	*G3	D4	H4	IC809	*F1	Q702	*B2	R40	D3	R313	D3	R525	D2	R708	*F3	R806	*D3	R924	*G3	R1025	*G2		
C37	*G2	C457	*A2	C754	*B3	C860	*G2	D101	*C3	IC812	*F1	Q703	*B2	R41	C3	R314	D3	R526	D2	R709	*B2	R807	*D3	R925	*G3	R1027	*G4		
C38	*H2	C458	A2	C755	*C3	C861	*G2	D102	*C3	IC813	*F1	Q704	*B2	R42	D3	R315	D3	R527	D2	R710	*B2	R808	*D3	R926	*G3				
C39	*H2	C459	A2	C756	*C2	C862	*F3	D301	*D3	IC814	*F1	Q705	*B2	R43	D3	R316	D3	R539	*A3	R711	*B2	R814	*F1	R927	*G2	RB701	*B3		
C40	G4	C460	*A2	C757	*B3	C863	*F3	D302	*D3	IC815	*F1	Q706	*B3	R44	C3	R324	*D3	R540	*A3	R712	A2	R817	*F1	R928	*G3	RB702	*A3		
C41	H4	C461	*A2	C758	*C3	C864	*F3	D700	*F2	IC816	*F1	Q707	B3	R45	C3	R325	*D3	R541	*A3	R713	A2	R821	*F1	R929	*G3	RB703	*A3		
C42	H3	C462	*A2	C759	*C2	C866	F4	D701	*F3	IC830	D4	Q708	*B3	R46	*H2	R326	*D3	R542	*A3	R714	A3	R822	*F1	R930	*G3	RB800	*F1		
C43	H4	C463	*A2	C760	*B3	C867	*F4	D702	*B2	IC831	*F3	Q709	*C3	R47	H4	R327	*D3	R543	*A2	R715	A3	R823	*F1	R931	*G3	RB801	*F1		
C44	G4	C464	*A2	C761	*C3	C868	*F4	D703	*B2	IC832	*E3	Q710	*C2	R48	H4	R328	*D3	R544	*A2	R718	*B2	R824	*F1	R932	*G3	RB802	*F1		
C45	H4	C465	D2	C762	*C2	C870	F3	D704	B2	IC833	*E4	Q711	*F1	R49	G4	R332	*D3	R545	*A2	R719	*B2	R825	*F1	R933	*G3	RB910	*G3		
C46	H3	C466	D2	C763	*B3	C871	G3	D705	*B3	IC834	*F4	Q712	*F1	R50	G4	R334	*D3	R546	*A3	R720	*B2	R826	*F1	R934	G3	RB911	*F3		
C47	*G3	C467	D2	C764	*C3	C872	G4	D706	C2	IC835	*F4	Q713	*F1	R51	H4	R335	*D3	R547	*A3	R721	*A3	R827	*F1	R935	*F3	RB912	*F3		
C48	*H3	C500	*A2	C765	*C3	C873	F4	D707	A3	IC836	*F4	Q714	*B3	R52	H4	R336	*D3	R548	*A3	R722	*F3	R828	*F1	R936	*F3	RB913	*F2		
C49	D4	C501	*A2	C766	*B3	C875	G3	D708	*B3	IC837	*E4	Q715	*F1	R53	H3	R337	*D3	R549	*A3	R723	*F3	R832	*F1	R937	*G4	RB914	*G2		
C50	D4	C510	*A2	C767	*C3	C876	G3	D709	*C3	IC838	*G4	Q716	*F1	R54	H3	R338	*D3	R550	*A3	R724	*F3	R833	*F1	R938	*F3	RB915	*F2		
C51	*G3	C511	*A2	C768	*C3	C877	G4	D710	C3	IC839	*G2	Q717	*F1	R55	H4	R339	*D3	R551	*A3	R725	*B2	R834	*E4	R939	*G4	RB916	*G3		
C52	*H3	C512	*A2	C769	*B3	C879	*F2	D830	*E4	IC840	*F2	Q718	*G1	R56	G4	R340	*D3	R552	*A3	R726	*B2	R835	*E4	R940	G3	RB917	*G2		
C101	*C3	C513	*A2	C770	*C3	C880	*F3	D831	E4	IC842	*E3	Q720	*B2	R57	H4	R341	*D3	R553	*A3	R727	*B3	R836	*F3	R941	*G3	RB918	*G3		
C102	*C3	C515	*A2	C771	*C2	C881	*F3	D832	D4	IC843	*F3	Q721	*B2	R58	H3	R342	D2	R554	*A3	R728	*B3	R837	D4	R942	*F3	RB919	*G3		
C103	*C3	C516	*A2	C772	*B3	C883	*F4	D833	*F3	IC844	*G1	Q722	B3	R59	*G3	R343	C2	R555	*A3	R729	*B2	R838	*F3	R943	*G2	RB920	*F3		
C104	*C3	C517	*A2	C773	*C3	C884	*F1	D834	*F3	IC845	*F3	Q723	B2	R60	*G3	R344	*D3	R556	*A3	R730	*B3	R839	D4	R944	*G3	RB921	*G3		
C105	*C3	C523	*A3	C774	*C2	C885	*F1	D835	*E3	IC847	*F3	Q724	B3	R61	*H3	R345	C2	R557	*A3	R731	*B3	R840	*E4	R946	*G3	RB922	*G3		
C106	*C3	C524	*A3	C775	B3	C910	*G4	D836	*F2	IC848	*F3	Q800	*D3	R62	*H3	R346	*D3	R558	*A3	R732	*B2	R841	*E4	R947	*G3	RB923	*F2		
C107	*C3	C525	*A3	C776	B3	C911	*G4	D837	*G2	IC849	*F4	Q801	*D3	R63	H4	R347	*D3	R559	*A3	R733	*B2	R842	*G1	R948	*F3				
C108	C3	C526	*A3	C777	B3	C912	*G3	D838	*G4	IC850	*F4	Q802	*F1	R64	G4	R348	C2	R560	*A3	R734	*B2	R843	*G1	R949	*G3	RV1	H3		
C109	C3	C527	*A3	C778	C3	C913	*G4	D839	*G4	IC851	*F3	Q803	*F1	R65	H4	R403	C3	R561	*A3	R735	*B3	R845	*F3	R950	*F3	RV2	H3		
C110	*C2	C528	*A3	C779	B2	C914	*G4	D840	*G2	IC852	*F3	Q829	*G2	R66	H3	R404	D3	R562	*A3	R736	*B3	R846	*F3	R951	*G3	RV700	B3		
C111	*C2	C600	*A2	C780	C2	C915	*G4	D841	*G3	IC908	*G3	Q830	*E4	R69	D4	R406	D3	R563	*A3	R737	*B3	R847	*G2	R952	*G2	RV701	B3		
C112	C2	C601	*A2	C781	C2	C916	*G3	D842	H2	IC913	*G4	Q831	*E4	R70	D4	R407	D3	R564	*A3	R738	*B2	R848	*G4	R953	*G2				
C113	C2	C603	*A2	C782	C2	C917	*G3	D843	E3	IC914	*G3	Q832	*E4	R103	C3	R409	D3	R565	*A3	R740	*B3	R849	*G4	R954	*G2	S1	H4		
C114	C2	C604	*A2	C783	C2	C918	*G3	D844	E4	IC916	*G3	Q833	*E3	R104	C3	R410	D3	R566	*A3	R741	*B2	R850	*G2	R955	*G2	S2	H4		
C116	C2	C607	*A2	C784	*B3	C919	*G3	D845	*G1	IC917	*G3	Q834	*F3	R106	C3	R412	C3	R600	*A2	R742	*B3	R851	*F3	R956	*G2	S3	H3		
C117	C2	C608	*A2	C785	*B3	C920	*G3	D846	H2	IC918	*F3	Q835	*F3	R107	C3	R413	D3	R601	*A2	R743	B3	R852	*G2	R957	*F2	S4	H4		
C118	C2	C609	*A2	C786	C2	C921	*G3	D847	G3	IC919	*G4	Q836	*G2	R109	C3	R414	D3	R602	*A2	R744	B3	R853	*H2	R958	*F2	S10	H3		
C119	C2	C610	*A2	C787	C2	C922	*G4	D848	G3	IC920	*G4	Q837	*G2	R110	C3	R415	D3	R603	*A2	R745	C3	R854	*H2	R959	*G3	S20	H3		
C120	C2	C612	*A3	C788	*B2	C923	*G3	D849	G4	IC921	*G2	Q838	*H2	R112	C3	R416	D3	R604	*A2	R746	*C3	R855	*F4	R960	*F3	S460	B3		
C121	C2	C613	*A3	C789	*B2	C924	*G3	D912	*G2	IC922	*G2	Q839	E3	R113	C3	R424	*D3	R605	*A2	R747	*C3	R856	*E3	R961	*F3	S501	*A3		
C122	C2	C614	*A3	C800	*D3	C925	*G3	D913	*G3	IC923	*C2	Q840	E4	R114	C3	R425	*D3	R606	*A2	R749	*B3	R857	*G1	R962	*G1	S700	A3		
C123	C2	C615	*B3	C801	*E3	C926	*F3			IC924	*C2	Q841	*G1	R115	C3	R426	*D3	R607	*A2	R750	*B2	R858	*G2	R963	*G3	S701	B2		
C126	D2	C616	*A3	C802	*D3	C927	*F3	E450	*H2	IC925	*G2	Q842	*H2	R116	C3	R427	*D3	R608	*A2	R751	*B3	R859	*G2	R965	*G2	S702	A3		
C127	C2	C617	*B3	C803	*E3	C928	*G3	E500	*D2	IC926	*G3	Q843	*H2	R124	*C3	R428	*D3	R609	*A2	R752	*C3	R860	*G4	R966	*G1	S703	A3		
C128	*D2	C618	*A2	C804	*E3	C929	*F3			IC927	*G4	Q844	*H2	R125	*C3	R430	*D3	R610	*A2	R753	*B3	R861	*G2	R967	*G1	S830	*H1		
C129	*D2	C619	A3	C805	*E3	C930	*F3	H801	F1	IC928	*G4	Q847	*F4	R126	*C3	R431	*D3	R611	*A2	R754	*B3	R862	*G2	R968	*G1	S831	G3		
C131	*D2	C620	*A3	C806	*E3	C931	*F2			IC1000	E4	Q848	*F4	R127	*C3	R432	*D3	R612	*A2	R755	*B3	R863	*G3	R969	*F3	S832	F3		
C132	*D2	C621	*A3	C807	*D3	C932	E4	IC1	C4			Q910	*G4	R128	*C3	R433	*C3	R613	*A2	R756	*B3	R864	*G1	R970	*G2	S833	F4		
C201	*C3	C622	A3	C808	*D3	C933	*F2	IC2	C4	L701	*E2	Q911	*G4	R132	*C3	R434	*D3	R614	*A2	R757	B2	R865	*F4	R971	*G1	S834	F3		
C202	*C3	C701	*F2	C809	*F1	C934	*F2	IC3	D4	L702	*E2	Q912	*G3	R134	*C3	R435	*D3	R634	*A2	R758	*B3	R866	*F4	R972	*G2	S835	F3		
C203	*C3	C702	*F3	C810	*F1	C935	*G2	IC4	D4	L703	*E2	Q913	*G3	R135	*C3	R436	*D3	R635	*A2	R759	*B3	R867	*E4	R973	*G2	S836	F4		
C204	*C3	C705	*F2	C811	*F1	C936	*G2	IC5	C3	L704	*E3	Q914	*G1	R136	*C3	R437	*D3	R636	*A2	R760	B2	R868	*H2	R974	*G2	S837	G3		
C205	*C3	C706	*F3	C812	*F1	C937	*G2	IC6	D3	L800	*F1	Q915	*G1	R137	*C3	R438	*D3	R637	*A2	R761	B2	R869	E3	R975	*G2	S838	G3		
C206	*C3	C707	*E2	C813	*F1	C938	*G2	IC7	*G2	L801	*F2	Q916	*G1	R138	*C3	R439	*C3	R638	*A2	R763	*B3	R870	E4	R976	*G2	S839	G4		
C207	*C3	C708	*A3	C814	*F1	C939	*G2	IC8	D4	L802	*F1	Q917	*G3	R139	*C3	R440	*D3	R639	*A3	R764	*B3	R871	*G1	R977	*C2	S840	E3		
C208	C3	C709	*F2	C816	*F1	C940	*G2	IC101	C3	L803	*F2			R140	*C3	R441	*C3	R640	*A3	R765	*B3	R872	*F4	R978	*F2	S841	F3		
C209	C3	C710	*F2	C817	D2	C941	*G2	IC102	C2	L804	*F1	R1	C4	R141	*D2	R442	*C3	R641	*A2	R766	*C3	R873	*F4	R979	*F2	S842	F3		
C301	*D3	C711	*F3	C818	*F1	C942	*C2	IC103	C2	L830	*E4	R2	C4	R142	C2	R444	*C3	R642	*A2	R767	*C3	R874	*H2	R980	*F2	S843	F3		
C302	*D3	C712	*F2	C820	*F2	C943	*C2	IC201	C3	L831	F4	R3	D4	R143	C2	R446	*C3	R643	*A3	R768	*C2	R875	*F3	R981	*C2	S844	F3		

IO-235, KY-623, LED-444, MA-162

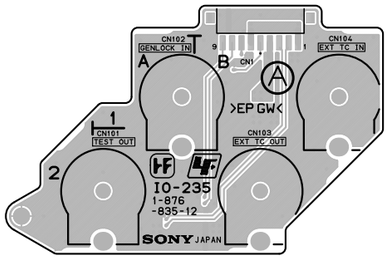

IO-235 -A SIDE-
SUFFIX: -12

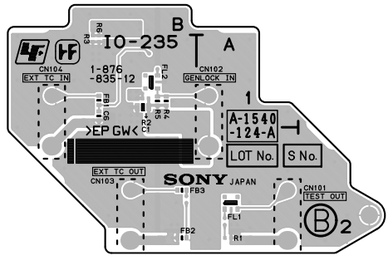

IO-235 -B SIDE-
SUFFIX: -12

```
---------------------
IO-235 (1-876-835-12)
---------------------
*:B SIDE

C1      *B1
C6      *B1

CN1      B1
CN101    A2
CN102    A1
CN103    B2
CN104    B1


FB1     *B1
FB2     *B2
FB3     *B2

FL1     *A2
FL2     *B1


R1      *A2
R2      *B1
R3      *B1
R4      *B1
R5      *B1
R6      *B1
```




LED-444 -A SIDE-
SUFFIX: -11



LED-444 -B SIDE-
SUFFIX: -11

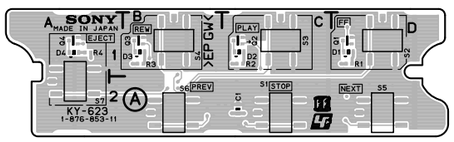

KY-623 -A SIDE-
SUFFIX: -11

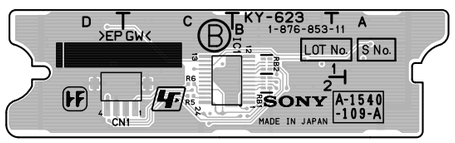

KY-623 -B SIDE-
SUFFIX: -11

```
---------------------
KY-623 (1-876-853-11)
---------------------
*:B SIDE

C1       C2

CN1     *D2

D1       D1
D2       C1
D3       B1
D4       A1


IC1     *C2

Q1       D1
Q2       C1
Q3       B1
Q4       A1


R1       D1
R2       C1
R3       B1
R4       A1
R5      *C2
R6      *C2

RB1     *B2
RB2     *B1

S1       C2
S2       D1
S3       C1
S4       B1
S5       D2
S6       B2
S7       A2
```




MA-162 -A SIDE-
SUFFIX: -11




MA-162 -B SIDE-
SUFFIX: -11

```
---------------------
MA-162 (1-876-825-11)
---------------------
*:B SIDE

C9       A1     FB1     *B1     R13     *B2     R57     *A1
C10      A2     FB2     *B1     R14     *B2     R58     *A2
C11      A1     FB3     *B2     R15     *B2     R59     *A2
C12      A2     FB4     *B2     R16     *B2     R60     *A1
C13      B1                     R17     *B2     R61     *A2
C14      B1     IC1     *A1     R18     *B2     R62     *A2
C15      B2     IC2     *A2     R19     *B2     R63     *A2
C16      B2                     R20     *B1     R69     *A2
C17      A2     L3      *A2     R21     *B2     R70      A2
C18      A1     L4       A2     R22     *B2
C19     *A2                     R23     *B2
C20     *A2     Q1      *A2     R24     *B1
C21     *A1     Q2      *A2     R25     *B1
C22     *A2     Q3       A1     R26     *B2
C23     *A1     Q4       A2     R27     *B2
C24     *A1     Q5      *B1     R28     *B1
C25     *A2     Q6      *B2     R29      A2
C26     *A2     Q7       A1     R30      A2
C27     *A2     Q8       A1     R31     *B2
C28      A2     Q9      *B1     R34     *A1
C31     *A2     Q10     *B2     R35     *A1
C32      A2     Q11      A1     R36     *B1
C33     *A2     Q12      A1     R37     *A2
C34      A2     Q17     *A2     R38     *A2
C35     *A2     Q18      A2     R39     *B2
C36      A2                     R40      A2
C37     *A2     R1       A1     R41     *A1
C38      A2     R2       A2     R42     *A2
                R3       A2     R45     *A1
CN1      B2     R4      *B1     R46     *A1
CN2     *A1     R5      *B1     R47     *B1
                R6      *B1     R48     *A2
D1      *B1     R7      *B1     R49     *A2
D2      *B1     R8      *B1     R50     *B2
D3      *B2     R9      *B1     R51      A1
D4      *B2     R10     *B1     R52      A1
D5       A1     R11     *B1     R55      A1
D6       A1     R12     *B2     R56     *A1
```

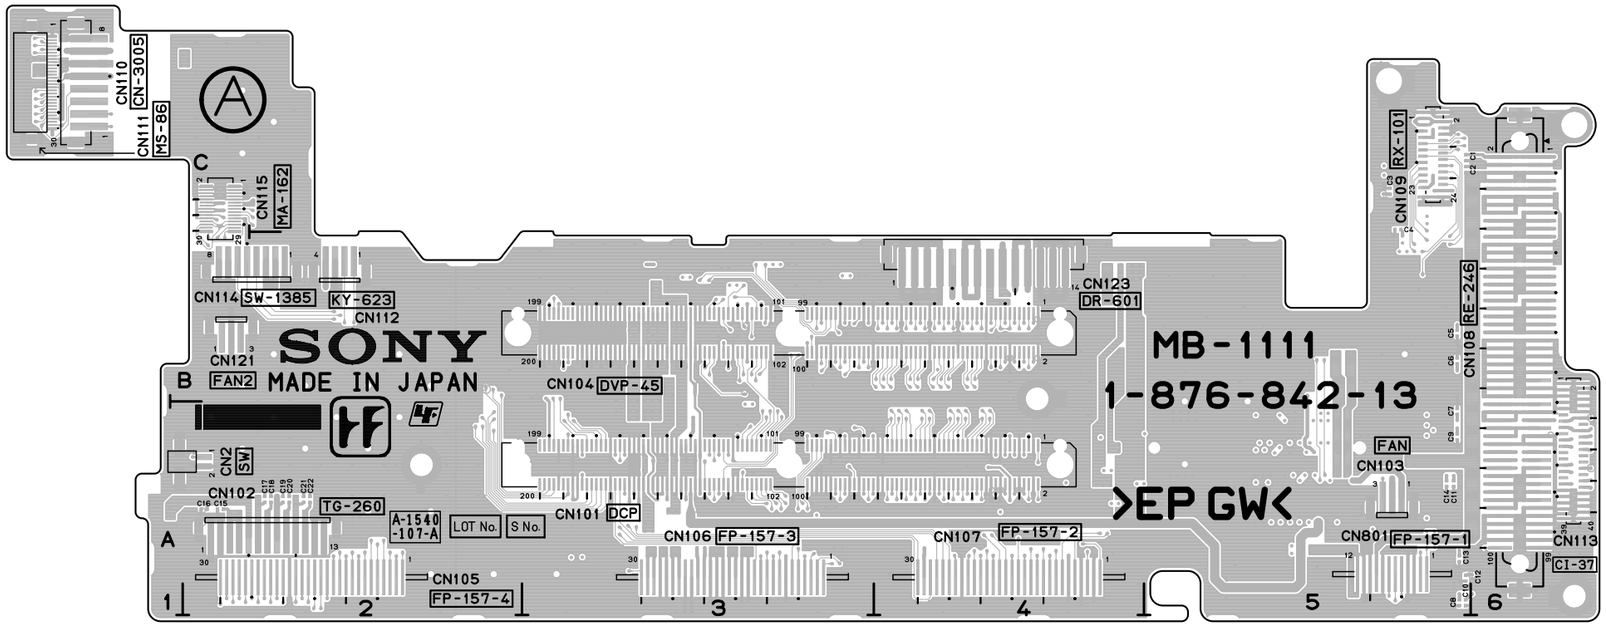


MB-1111 -A SIDE-
SUFFIX: -13

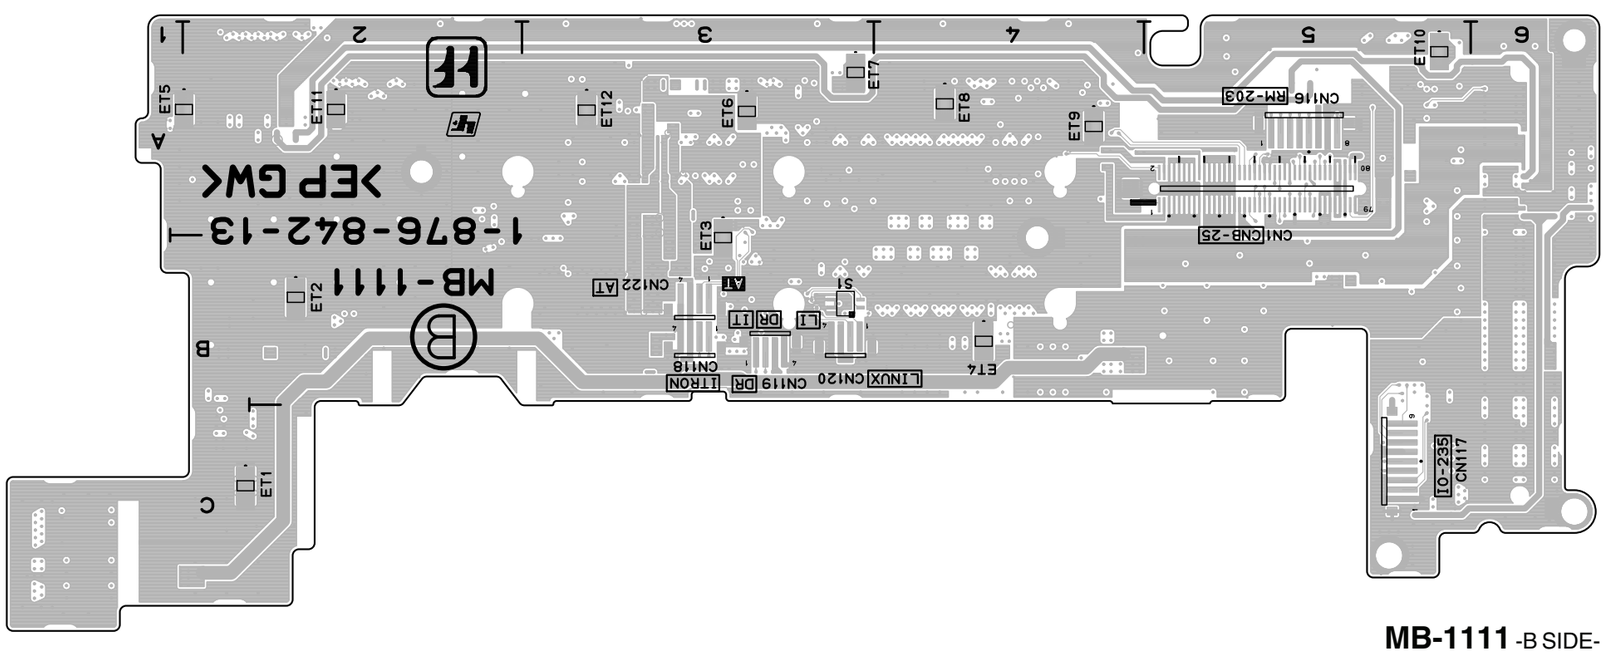


MB-1111 -B SIDE-
SUFFIX: -13

MB-1111 (1-876-842-13)
---
*:B SIDE

C1	C5
C2	C5
C3	C5
C4	C5
C5	B5
C6	B5
C7	A5
C8	A5
C9	A5
C10	A5
C11	A5
C12	A5
C13	A5
C14	A5
C15	A2
C16	A2
C17	A2
C18	A2
C19	A2
C20	A2
C21	A2
C22	A2
CN1	*A5
CN2	A2
CN101	A3
CN102	A2
CN103	A5
CN104	B3
CN105	A2
CN106	A3
CN107	A4
CN108	B6
CN109	C5
CN110	C1
CN111	C1
CN112	B2
CN113	A6
CN114	B2
CN115	C2
CN116	*A5
CN117	*C5
CN118	*B3
CN119	*B3
CN120	*B3
CN121	B2
CN122	*B3
CN123	B4
CN801	A5
ET1	*C2
ET2	*B2
ET3	*B3
ET4	*B4
ET5	*A2
ET6	*A3
ET7	*A3
ET8	*A4
ET9	*A4
ET10	*A5
ET11	*A2
ET12	*A3
S1	*B3

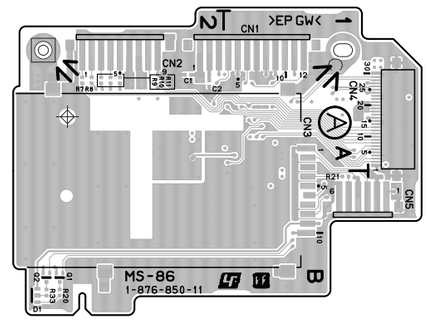

MS-86 -A SIDE-
SUFFIX: -11

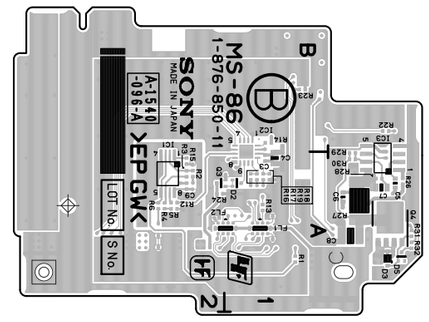


MS-86 -B SIDE-
SUFFIX: -11

MS-86 (1-876-850-11)
---
*:B SIDE

C1	A2	FL2	*A1	R12	*A2
C2	A2			R13	*A1
C3	*A1	IC1	*A2	R14	*B1
C4	*A1	IC2	*A1	R15	*A2
C5	*A1	IC3	*A1	R16	*A1
C6	*A1			R17	*A1
C7	*A1	Q1	B2	R18	*A1
C8	*A1	Q2	B2	R19	*A1
C9	*A2	Q3	*A2	R20	B2
		Q4	*A1	R21	B1
CN1	A1			R22	*B1
CN2	A2	R1	*A1	R23	*B1
CN3	B2	R2	*A2	R24	*A2
CN4	A1	R3	*A2	R26	*A1
CN5	B1	R4	*A2	R27	*A1
		R5	*A2	R28	*A1
D1	B2	R6	*A2	R29	*A1
D2	*A1	R7	A2	R30	*A1
D3	*A1	R8	A2	R31	*A1
D5	*A1	R9	A2	R32	*A1
		R10	A2	R33	B2
FL1	*A1	R11	A2		


PA-342A, PA-343A, PA-344

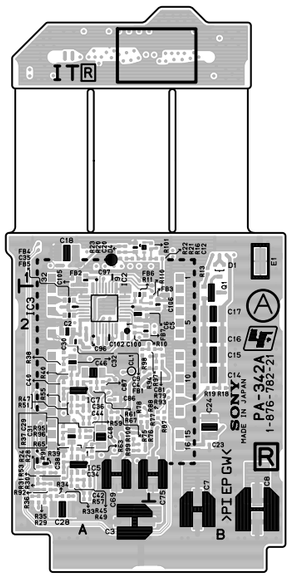


PA-342A -A SIDE-
SUFFIX: -21

PA-342A (1-876-782-21)
*:B SIDE

C1	*A1	FB2	A1
C2	A2	FB3	B2
C3	A2	FB4	A2
C4	A2	FB5	A2
C5	A2	FB6	A2
C6	A2	FB7	A2
C7	B2		
C8	B2	IC2	A2
C9	A2	IC3	*B1
C12	B1	IC4	*A1
C14	B2	IC5	A2
C15	B2	IC7	A2
C16	B2	IC10	*A2
C17	B2		
C18	A1	Q1	B2
C19	*A2		
C20	A1	R10	A2
C21	*A2	R11	A2
C22	*A2	R13	B1
C23	B2	R15	*B2
C24	B2	R16	A1
C26	*A2	R18	B2
C27	*A2	R19	B2
C28	A2	R20	A1
C29	A2	R21	A1
C30	A2	R22	A1
C31	A2	R23	A1
C32	A2	R24	A2
C33	*A1	R28	A2
C34	A2	R29	A2
C35	A2	R30	A2
C36	A2	R31	A2
C38	A2	R32	*A1
C40	A2	R33	A2
C42	A2	R34	A2
C44	A2	R35	A2
C46	A2	R36	A2
C48	A2	R37	A2
C51	*A2	R38	A2
C52	*B2	R39	A2
C53	*A2	R40	A2
C54	*A2	R45	A2
C57	*A2	R47	A2
C58	*A2	R49	A2
C61	*A2	R51	A2
C62	*A2	R53	A2
C65	*A2	R55	A2
C66	*A2	R57	A2
C69	A2	R59	A2
C71	*A2	R61	A2
C73	*A2	R63	A2
C74	*B2	R65	A2
C75	B2	R67	A2
C76	*B2	R75	A2
C77	*B2	R76	A2
C81	B2	R77	A2
C83	*B2	R78	A2
C84	*B2	R79	B2
C85	*B2	R87	B2
C86	A2	R88	B2
C87	A2	R91	A2
C88	*B2	R92	A2
C89	*B2	R93	B2
C95	*A2	R94	B2
C96	A2	R95	A2
C97	A1	R96	A2
C100	A2	R97	B2
C102	A2	R98	A2
C103	*A2	R99	A2
C104	*A2	R100	A2
C105	A1	R101	B1
C106	B2	R110	B2
CL1	A2		
CN1	*A1		
D1	B1		
D4	A1		
D5	*B2		
E1	B1		
FB1	A2		

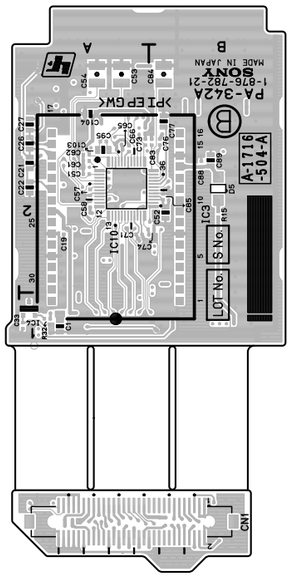


PA-342A -B SIDE-
SUFFIX: -21

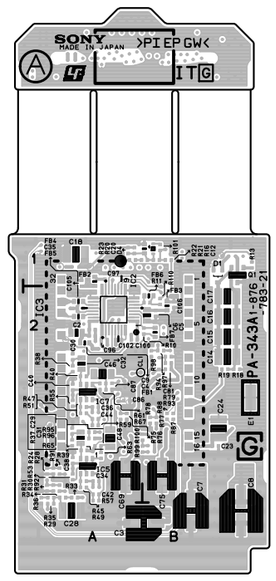


PA-343A -A SIDE-
SUFFIX: -21

PA-343A (1-876-783-21)
*:B SIDE

C1	*A1	FB2	A1
C2	A2	FB3	B2
C3	B2	FB4	A2
C4	A2	FB5	A2
C5	B2	FB6	B2
C6	B2	FB7	B2
C7	B2		
C8	B2	IC2	A2
C9	A2	IC3	*B1
C12	B1	IC4	*A1
C14	B2	IC5	A2
C15	B2	IC7	A2
C16	B2	IC10	*A2
C17	B2		
C18	A1	Q1	B1
C19	*A2		
C20	B1	R10	B2
C21	*A2	R11	B2
C22	*A2	R13	B1
C23	B2	R15	*B2
C24	B2	R16	B1
C26	*A2	R18	B2
C27	*A2	R19	B2
C28	A2	R20	A1
C29	A2	R21	B1
C30	A2	R22	A1
C31	A2	R23	A1
C32	A2	R24	A2
C33	*A1	R28	A2
C34	A2	R29	A2
C35	A2	R30	A2
C36	A2	R31	A2
C38	A2	R32	*A1
C40	A2	R33	A2
C42	A2	R34	A2
C44	A2	R35	A2
C46	A2	R36	A2
C48	A2	R37	A2
C51	*A2	R38	A2
C52	*B2	R39	A2
C53	*A2	R40	A2
C54	*A2	R45	A2
C57	*A2	R47	A2
C58	*A2	R49	A2
C61	*A2	R51	A2
C62	*A2	R53	A2
C65	*A2	R55	A2
C66	*A2	R57	A2
C69	A2	R59	A2
C71	*B2	R61	A2
C73	*B2	R63	A2
C74	*B2	R65	A2
C75	B2	R67	A2
C76	*B2	R75	A2
C77	*B2	R76	A2
C81	B2	R77	B2
C83	*B2	R78	B2
C84	*B2	R79	B2
C85	*B2	R87	B2
C86	A2	R88	B2
C87	A2	R91	A2
C88	*B2	R92	A2
C89	*B2	R93	B2
C95	*A2	R94	B2
C96	A2	R95	A2
C97	A1	R96	A2
C100	A2	R97	B2
C102	A2	R98	B2
C103	*A2	R99	B2
C104	*A2	R100	B2
C105	A1	R101	B1
C106	B2	R110	B2
CL1	A2		
CN1	*A1		
D1	B1		
D4	B1		
D5	*B2		
E1	B2		
FB1	A2		

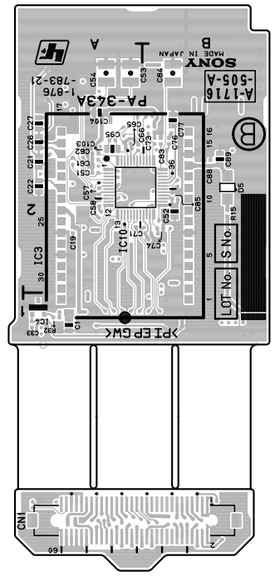


PA-343A -B SIDE-
SUFFIX: -21

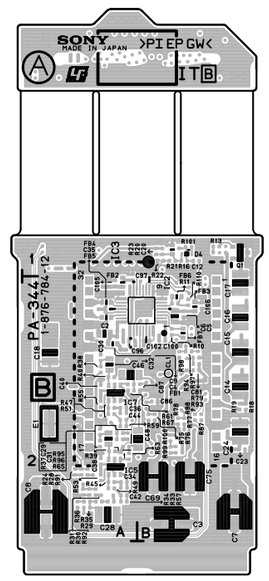

PA-344 -A SIDE-
SUFFIX: -12


PA-344 (1-876-784-12)
*:B SIDE

C1	*A1	FB2	A2
C2	A2	FB3	B2
C3	B2	FB4	A2
C4	A2	FB5	A2
C5	B2	FB6	B2
C6	B2	FB7	B2
C7	B2		
C8	A2	IC2	B2
C9	A2	IC3	*B2
C12	B1	IC4	*A1
C14	B2	IC5	A2
C15	B2	IC7	A2
C16	B2	IC10	*B2
C17	B2		
C18	A2	Q1	B1
C19	*A2		
C20	B1	R10	B2
C21	*A2	R11	B2
C22	*A2	R13	B1
C23	B2	R15	*B2
C24	B2	R16	B1
C26	*A2	R18	B2
C27	*A2	R19	B2
C28	A2	R20	B1
C29	A2	R21	B1
C30	A2	R22	B1
C31	A2	R23	B1
C32	A2	R24	A2
C33	*A1	R28	A2
C34	A2	R29	A2
C35	A2	R30	A2
C36	A2	R31	A2
C38	A2	R32	*A2
C40	A2	R33	A2
C42	A2	R34	A2
C44	A2	R35	A2
C46	A2	R36	A2
C48	B2	R37	A2
C51	*A2	R38	A2
C52	*B2	R39	A2
C53	*B2	R40	A2
C54	*A2	R45	A2
C57	*A2	R47	A2
C58	*A2	R49	A2
C61	*A2	R51	A2
C62	*A2	R53	A2
C65	*B2	R55	A2
C66	*B2	R57	A2
C69	B2	R59	A2
C71	*B2	R61	A2
C73	*B2	R63	A2
C74	*B2	R65	A2
C75	B2	R67	A2
C76	*B2	R75	B2
C77	*B2	R76	B2
C81	B2	R77	B2
C83	*B2	R78	B2
C84	*B2	R79	B2
C85	*B2	R87	B2
C86	B2	R88	B2
C87	B2	R91	A2
C88	*B2	R92	A2
C89	*B2	R93	B2
C95	*B2	R94	B2
C96	A2	R95	A2
C97	A2	R96	A2
C100	B2	R97	B2
C102	B2	R98	B2
C103	*B2	R99	B2
C104	*A2	R100	B2
C105	A2	R101	B1
C106	B2	R110	B2
CL1	B2		
CN1	*A1		
D1	*B1		
D4	B1		
D5	*B2		
E1	A2		
FB1	A2		

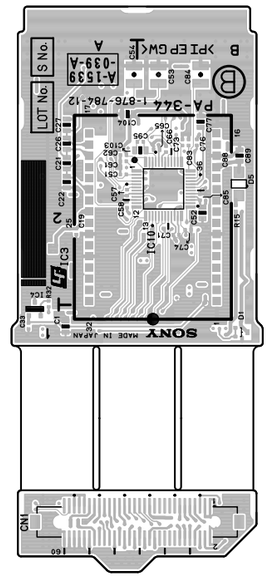


PA-344 -B SIDE-
SUFFIX: -12


PD-118, PS-708, PS-731

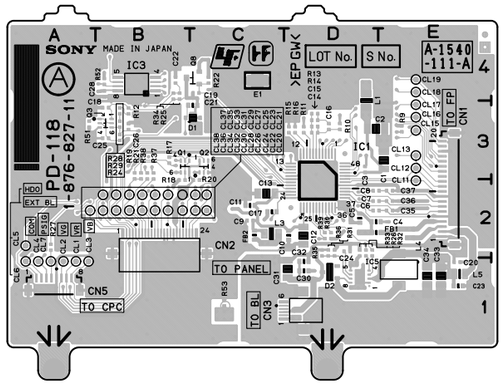


PD-118 -A SIDE-
SUFFIX: -11

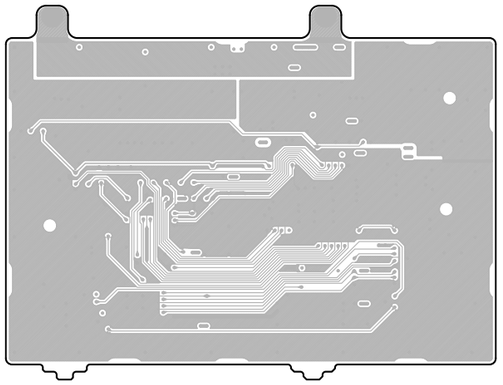

PD-118 -B SIDE-
SUFFIX: -11




PS-708 -A SIDE-
SUFFIX: -11




PS-708 -B SIDE-
SUFFIX: -11

PD-118 (1-876-827-11)					
*:B SIDE					
C1	E3	CL28	B2	R30	D2
C2	D3	CL29	B2	R31	D2
C3	D3	CL30	B2	R32	D2
C4	D2	CL31	B2	R33	D2
C5	D2	CL32	B2	R34	B4
C6	D2	CL33	B2	R35	D2
C7	D2	CL34	B2	R36	D2
C8	D2	CL35	B2	R37	B3
C9	C2	CL36	B2	R38	B3
C10	D2	CL37	B2	R39	D2
C11	C2	CL38	A2	R51	A3
C12	D2			R52	B4
C13	C2	CN1	E2	R53	C1
C14	D3	CN2	B2		
C15	D3	CN3	D1		
C16	D3	CN5	A1		
C17	C2				
C18	B3	D1	C3		
C19	C4	D2	D1		
C20	E1				
C21	C3	E1	C4		
C22	B4				
C23	E1	FB1	D2		
C24	D2	FB2	C2		
C25	B3				
C26	B3	IC1	D2		
C28	B4	IC3	B4		
C30	D1	IC5	D1		
C31	D1				
C32	D1	L1	D3		
C33	E1	L3	C2		
C34	E1	L4	E1		
C35	E2	L5	E1		
C36	E2				
C37	E2	Q1	B3		
		Q2	C3		
CL1	A1	Q3	B3		
CL2	A1	Q8	C4		
CL3	A1				
CL4	A1	R9	E3		
CL5	A2	R10	D3		
CL6	A1	R11	D3		
CL7	A1	R12	B3		
CL11	E2	R13	D3		
CL12	E3	R14	D3		
CL13	E3	R15	D3		
CL15	E3	R16	D3		
CL16	E3	R17	B3		
CL17	E3	R18	B2		
CL18	E4	R19	B3		
CL19	E4	R20	C2		
CL20	C2	R21	B3		
CL21	C2	R22	C4		
CL22	C2	R24	B3		
CL23	C2	R25	B4		
CL24	B2	R26	D2		
CL25	B2	R27	A2		
CL26	B2	R28	B3		
CL27	B2	R29	B3		

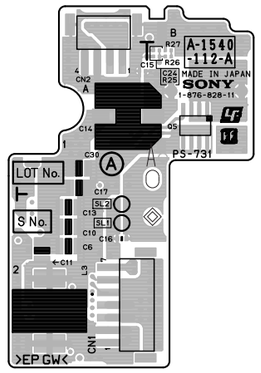

PS-731 -A SIDE-
SUFFIX: -11

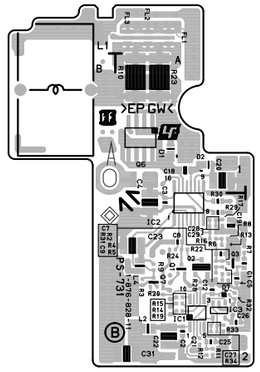


PS-731 -B SIDE-
SUFFIX: -11


PS-731 (1-876-828-11)					
*:B SIDE					
C1	*A2	FL1	*A1	R22	*A2
C2	*A2	FL2	*A1	R23	*A1
C3	*A2	FL3	*A1	R24	*A2
C4	*A2			R25	B1
C5	*A2	IC1	*A2	R26	B1
C6	A2	IC2	*A2	R27	B1
C7	*A2	IC3	*A2	R28	*A2
C8	*A2			R29	*A2
C9	*A2	L1	*B1	R30	*A2
C10	A2	L2	*A2	R31	*A2
C11	A2	L3	A2	R32	*A2
C12	*A2	L4	*A2	R33	*A2
C13	A2			R34	*A2
C14	A1	Q1	*A2		
C15	A1	Q2	*A2	SL1	A2
C16	A2	Q3	*A2	SL2	A2
C17	A1	Q5	B1		
C18	*A1	Q6	*A1		
C19	*A2	Q7	*A2		
C20	*A1				
C21	*A2	R2	*A2		
C22	*A2	R3	*A2		
C23	*A2	R4	*A2		
C24	B1	R5	*A2		
C25	*A2	R6	*A2		
C26	*A2	R7	*A2		
C27	*A2	R8	*A2		
C28	*A2	R9	*A2		
C29	*A2	R10	*A1		
C30	A1	R11	*A2		
C31	*A2	R12	*A2		
		R13	*A2		
CN1	A2	R14	*A2		
CN2	A1	R15	*A2		
		R16	*A2		
D1	*A1	R17	*A2		
D2	*A1	R19	*A2		
D7	*A2	R20	*A2		

4-16

RE-246, RM-216, RX-101, SE-709

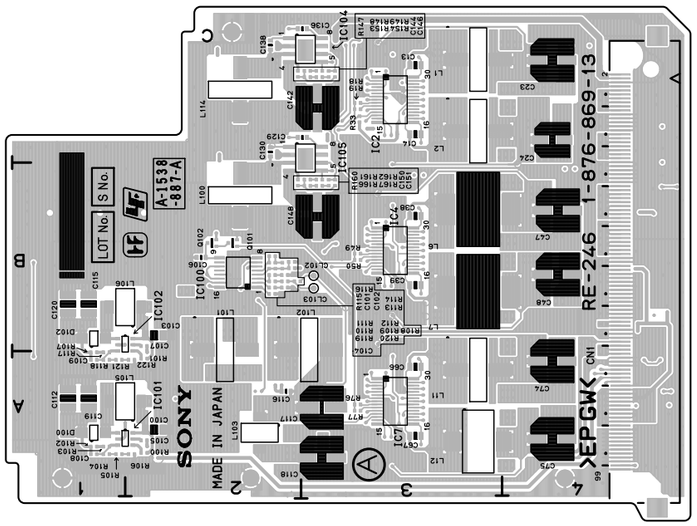


RE-246 -A SIDE-
SUFFIX: -13

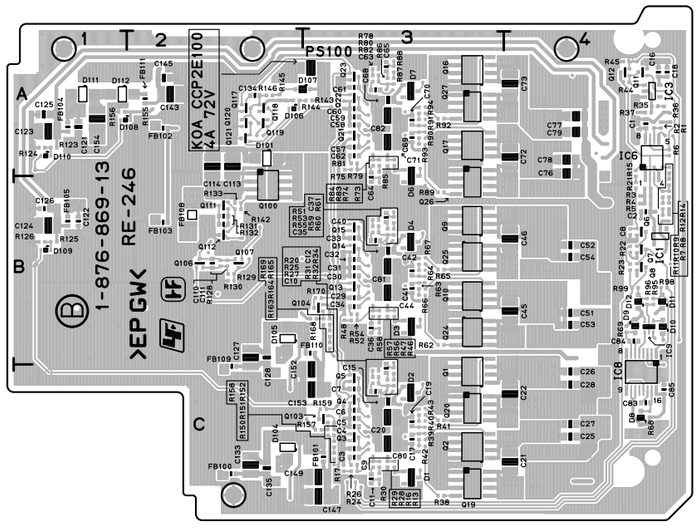


RE-246 -B SIDE-
SUFFIX: -13

RE-246 (1-876-869-13)
---
*:B SIDE


C1	*A4	C112	A1	L1	C3	R36	*A4	R133	*B2
C2	*B4	C113	*A2	L2	C3	R37	*A4	R142	*B2
C3	*C3	C114	*A2	L6	B3	R38	*C3	R143	*A3
C4	*C3	C115	B1	L7	B3	R39	*C3	R144	*A2
C5	*C3	C116	A2	L11	A3	R40	*C3	R145	*A2
C6	*C3	C117	A3	L12	A3	R41	*C3	R146	*A2
C7	*C3	C118	A3	L100	B2	R42	*C3	R147	C2
C8	*B4	C119	A1	L101	B2	R43	*C3	R148	C3
C9	*C3	C120	B1	L102	B3	R44	*A4	R149	C3
C10	*C3	C121	*A1	L103	A2	R45	*A4	R150	*C3
C11	*C3	C122	*B1	L105	A2	R46	*B3	R151	*C3
C12	*C3	C123	*A1	L106	B2	R47	*B3	R152	*C3
C13	C3	C124	*B1	L114	C2	R48	*B3	R153	C3
C14	C3	C125	*A1			R49	B3	R154	C3
C15	*C3	C126	*B1	PS100	*A3	R50	B3	R155	*A2
C16	*A4	C127	*B2			R51	*B3	R156	*A1
C17	*C3	C128	*B2	Q1	*C3	R52	*B3	R157	*C3
C18	*A4	C129	C3	Q2	*C3	R53	*B3	R158	*C3
C19	*C3	C130	C2	Q3	*C3	R54	*B3	R159	*C3
C20	*C3	C133	*C2	Q4	*C3	R55	*B3	R160	B2
C21	*C4	C134	*A2	Q5	*C3	R56	*B3	R161	B3
C22	*C4	C135	*C2	Q6	*B4	R57	*B3	R162	B3
C23	C4	C136	C3	Q7	*B4	R58	*B3	R163	*B3
C24	C4	C138	C2	Q8	*B4	R59	*B3	R164	*B3
C25	*C4	C142	C3	Q9	*B3	R60	*B3	R165	*B3
C26	*C4	C143	*A2	Q10	*B3	R61	*B3	R166	B3
C27	*C4	C144	C3	Q11	*A4	R62	*B3	R167	B3
C28	*C4	C145	*A2	Q12	*A4	R63	*B3	R168	*B3
C29	*B3	C146	C3	Q13	*B3	R64	*B3	R169	*B3
C30	*B3	C147	*C3	Q14	*B3	R65	*B3	R170	*B3
C31	*B3	C148	B3	Q15	*B3	R66	*B3		
C32	*B3	C149	*C3	Q16	*A3	R67	*B3		
C33	*B3	C150	B3	Q17	*A3	R68	*C4		
C34	*B3	C151	B3	Q19	*C3	R69	*B4		
C35	*B3	C152	*C3	Q20	*C3	R73	*A3		
C36	*B3	C153	*C3	Q21	*A3	R74	*A3		
C37	*B3	C154	*A1	Q22	*A3	R75	*A3		
C38	B3			Q23	*A3	R76	A3		
C39	B3	CL102	B3	Q24	*B3	R77	A3		
C40	*B3	CL103	B3	Q25	*B3	R78	*A3		
C41	*B3			Q26	*B3	R79	*A3		
C42	*B3	CN1	B4	Q27	*A3	R80	*A3		
C44	*B3			Q100	*B2	R81	*A3		
C45	*B4	D1	*C3	Q101	B2	R82	*A3		
C46	*B4	D2	*C3	Q102	B2	R83	*A3		
C47	B4	D3	*B3	Q103	*C3	R84	*A3		
C48	B4	D4	*B3	Q104	*B3	R85	*A3		
C51	*B4	D6	*A3	Q106	*B2	R86	*A3		
C52	*B4	D7	*A3	Q107	*B2	R87	*A3		
C53	*B4	D8	*C4	Q111	*B2	R88	*A3		
C54	*B4	D9	*B4	Q112	*B2	R89	*B3		
C57	*A3	D10	*B4	Q117	*A2	R90	*A3		
C58	*A3	D11	*B4	Q118	*A2	R91	*A3		
C59	*A3	D12	*B4	Q119	*A2	R92	*A3		
C60	*A3	D100	A1	Q120	*A2	R93	*A3		
C61	*A3	D101	*A2	Q121	*A2	R94	*A3		
C62	*A3	D102	B1			R95	*B4		
C63	*A3	D104	*C2	R1	*A4	R96	*B4		
C64	*B3	D105	*B2	R2	*A4	R98	*B4		
C65	*A3	D106	*A2	R3	*B4	R99	*B4		
C66	A3	D107	*A3	R4	*B4	R100	A2		
C67	A3	D108	*A1	R5	*B4	R101	A2		
C68	*A3	D109	*B1	R6	*A4	R102	A1		
C69	*A3	D110	*A1	R7	*B4	R103	A1		
C70	*A3	D111	*A1	R8	*B4	R104	A1		
C71	*A3	D112	*A1	R9	*B4	R105	A1		
C72	*A4			R10	*B4	R106	A2		
C73	*A4	FB100	*C2	R11	*B4	R107	A1		
C74	A4	FB101	*C3	R12	*B4	R108	B2		
C75	A4	FB102	*A2	R13	*C3	R109	B2		
C76	*A4	FB103	*B2	R14	*A4	R110	B2		
C77	*A4	FB104	*A1	R15	*A4	R111	B2		
C78	*A4	FB105	*B1	R16	*C3	R112	B2		
C79	*A4	FB108	*B2	R17	*C3	R113	B2		
C80	*C3	FB109	*C2	R18	C3	R114	B2		
C81	*B3	FB110	*B3	R19	C3	R115	B2		
C82	*A3	FB111	*A2	R20	*C3	R116	B2		
C83	*C4			R21	*B4	R117	A1		
C84	*B4	IC1	*B4	R22	*B4	R118	A1		
C85	*C4	IC2	C3	R23	*B4	R119	B2		
C100	A2	IC3	*A4	R24	*C3	R120	B2		
C101	B2	IC4	B3	R25	*C3	R121	A1		
C102	B2	IC6	*A4	R26	*C3	R122	A2		
C103	B2	IC7	A3	R27	*C3	R123	*A1		
C104	B2	IC8	*C4	R28	*C3	R124	*A1		
C105	A2	IC9	*B4	R29	*C3	R125	*B1		
C106	B2	IC100	B2	R30	*C3	R126	*B1		
C107	B2	IC101	A2	R31	*C3	R128	*B2		
C108	A1	IC102	B2	R32	*C3	R129	*B2		
C109	A1	IC104	C3	R33	C3	R130	*B2		
C110	*B2	IC105	C3	R34	*C3	R131	*B2		
C111	*B2			R35	*A4	R132	*B2		




RM-216 -A SIDE-
SUFFIX: -11



RM-216 -B SIDE-
SUFFIX: -11




RX-101 -A SIDE-
SUFFIX: -11




RX-101 -B SIDE-
SUFFIX: -11

RX-101 (1-876-844-11)
---
*:B SIDE

C1	*A1	IC5	A1	R15	*B2
C2	A1	IC6	A1	R16	*B2
C3	*A1	IC7	B2	R17	*B2
C4	B2	IC8	B2	R18	*B2
C5	*B2			R19	*B2
C6	A1	L1	B2	R20	*B2
C7	*B2	L2	A2	R21	*A1
C8	*A1			R23	*A1
C10	A2	R1	*B2	R24	*B2
C11	*A1	R3	*A2	R25	*B2
C12	*A2	R4	*B2	R26	*A1
C13	*B2	R5	*A2	R27	*A1
C14	*B2	R6	*A2	R28	*A1
		R7	*B2	R29	*B2
CN1	B1	R8	*B2	R30	*B2
CN2	A2	R9	*B2	R31	*A1
		R10	*B2		
IC1	A1	R11	*B2	RB1	A1
IC2	A1	R12	*B2		
IC3	A1	R13	*B2		
IC4	A1	R14	*B2		

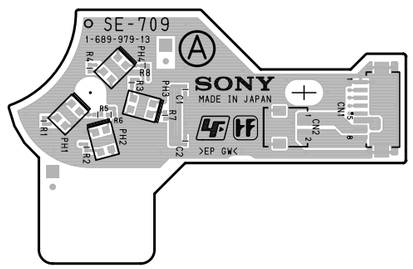


SE-709 -A SIDE-
SUFFIX: -13

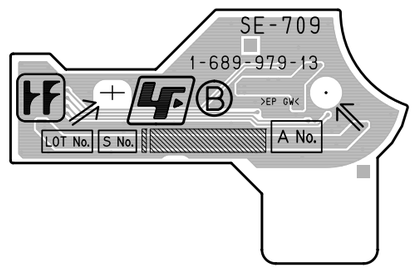


SE-709 -B SIDE-
SUFFIX: -13

SE-803, SE-857, SE-858, SW-1125G, SW-1249, SW-1352, SW-1385, SW-1391

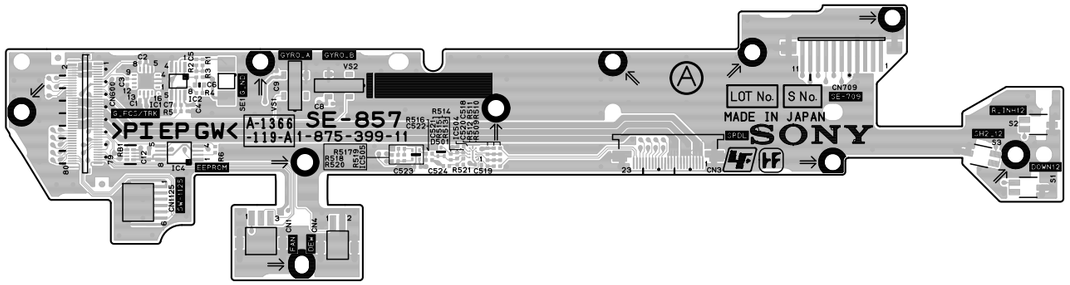


SE-857 -A SIDE-
SUFFIX: -11

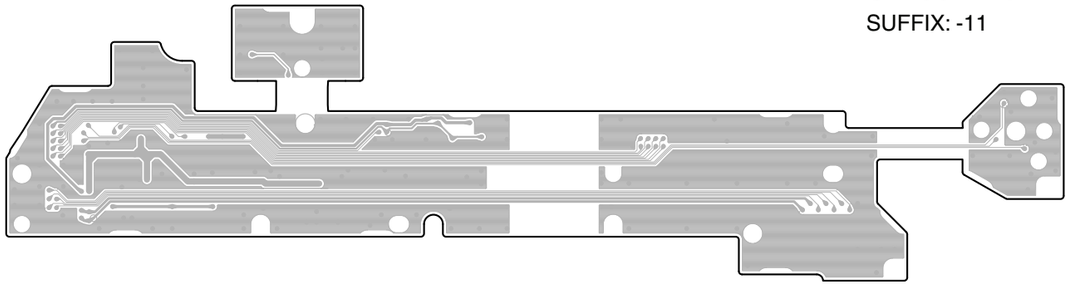


SE-857 -B SIDE-
SUFFIX: -11


SE-858 -A SIDE-
SUFFIX: -11

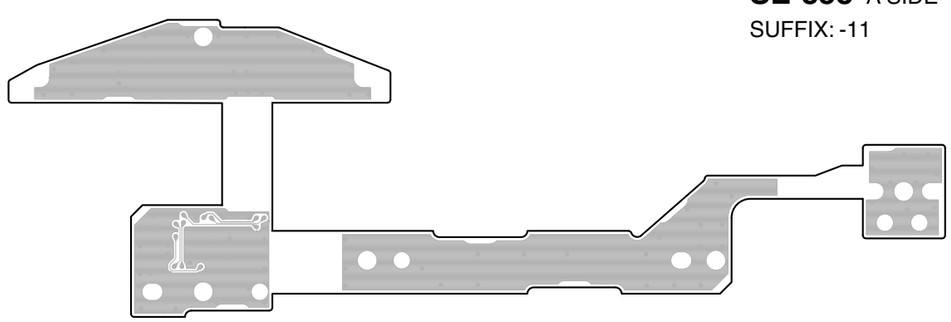


SE-858 -B SIDE-
SUFFIX: -11

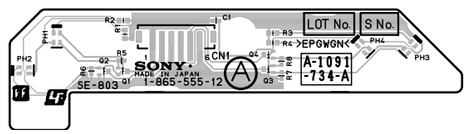


SE-803 -A SIDE-
SUFFIX: -12

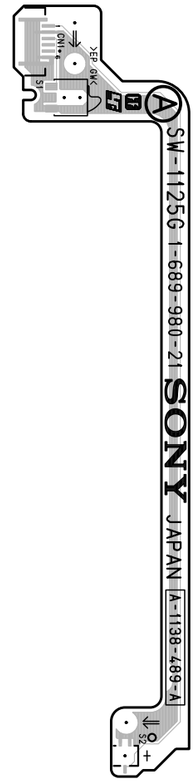


SW-1125G -A SIDE-
SUFFIX: -21

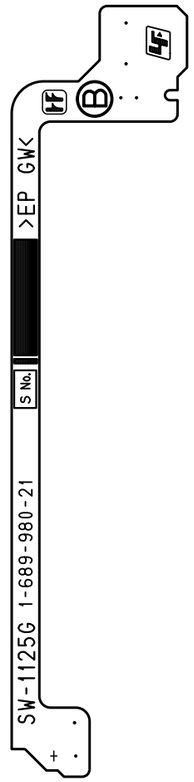


SW-1125G -B SIDE-
SUFFIX: -21

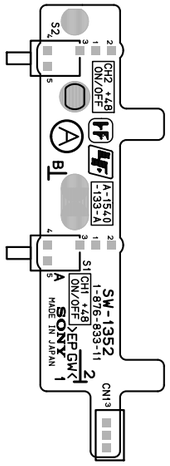


SW-1352 -A SIDE-
SUFFIX: -11

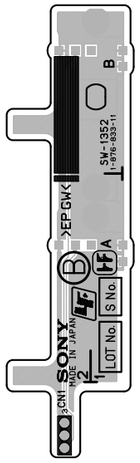


SW-1352 -B SIDE-
SUFFIX: -11




SW-1385 -A SIDE-
SUFFIX: -11




SW-1385 -B SIDE-
SUFFIX: -11

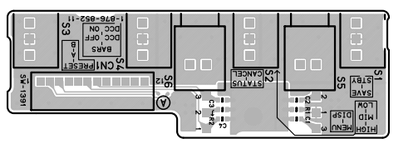


SW-1391 -A SIDE-
SUFFIX: -11

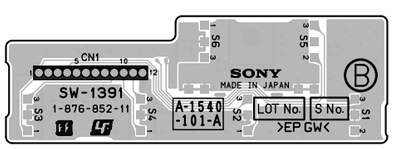

SW-1391 -B SIDE-
SUFFIX: -11




SW-1249 -A SIDE-
SUFFIX: -11




SW-1249 -B SIDE-
SUFFIX: -11

4-18

SW-1425, SW-1426, SY-355

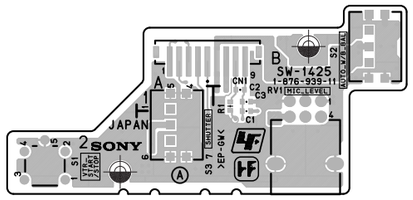

SW-1425 -A SIDE-
SUFFIX: -11

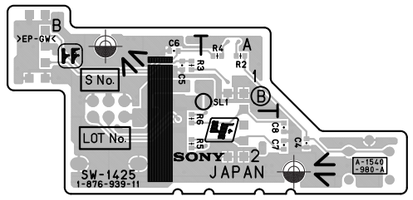


SW-1425 -B SIDE-
SUFFIX: -11

```
-----------------------
SW-1425 (1-876-939-11)
-----------------------
*:B SIDE

C1       B2     RV1      B2
C2       B1
C3       B1     S1       A2
C4      *A2     S2       B1
C5      *B1     S3       A2
C6      *B1
C7      *A2     SL1     *A1
C8      *A2

CN1      A1


R1       B1
R2      *A1
R3      *B1
R4      *A1
R5      *B2
R6      *B2
```



SW-1426 -A SIDE-
SUFFIX: -11




SW-1426 -B SIDE-
SUFFIX: -11

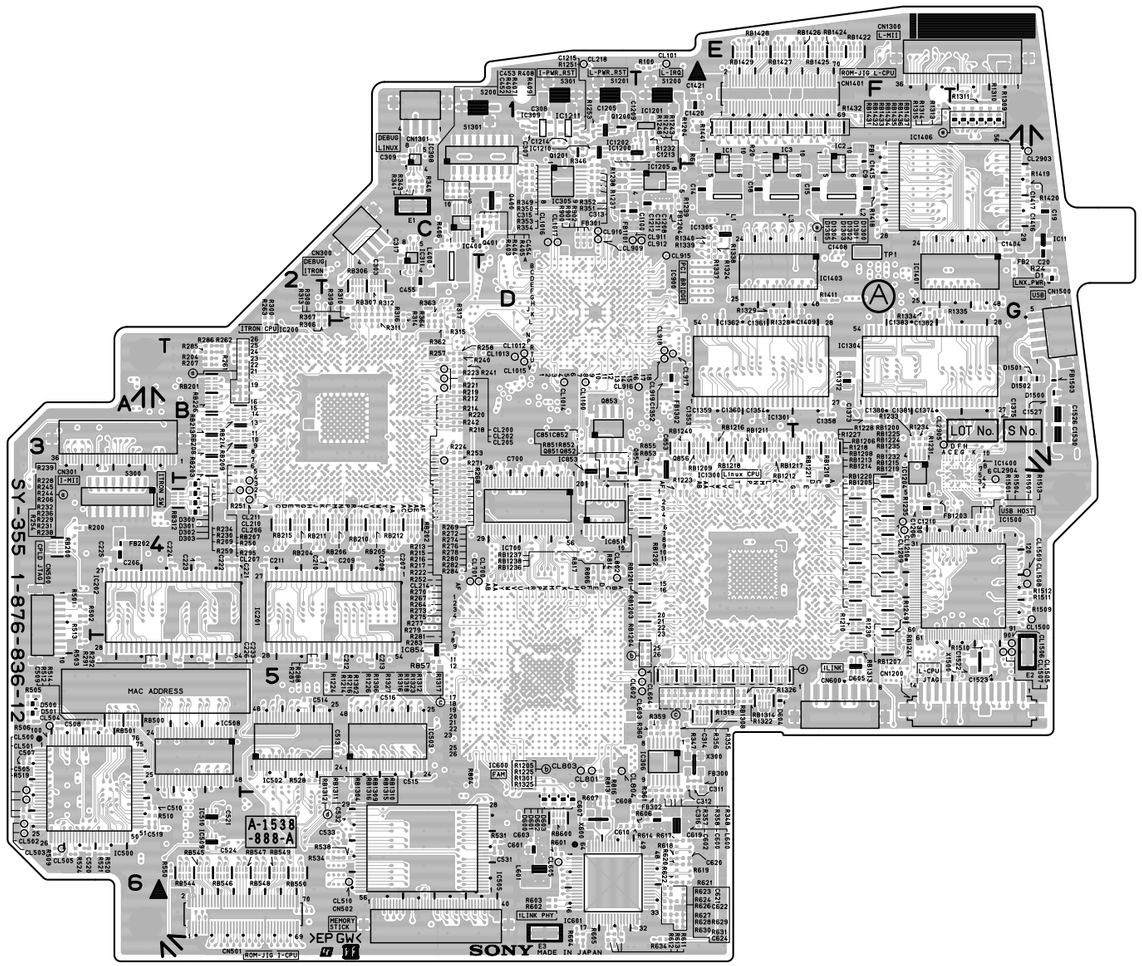

Components location list ; next page

SY-355 -A SIDE-
SUFFIX: -12

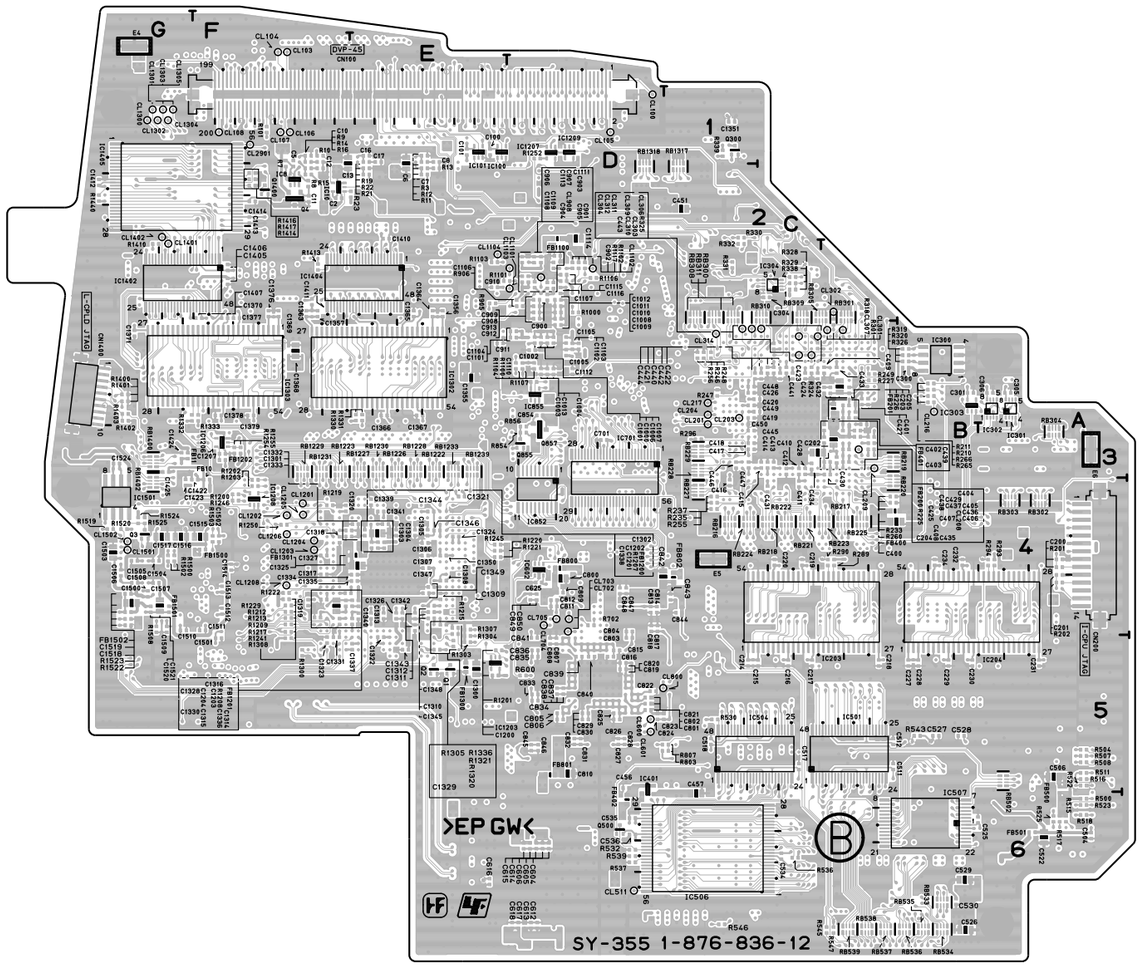


SY-355 -B SIDE-
SUFFIX: -12


4-19

SY-355 (1-876-836-12)
---
*:B SIDE

C2	*F2	C422	*C3	C701	*D3	C1108	*D2	C1367	*E3	CL303	*C3	CN600	F5	IC309	D1	R19	*E1	R288	B5	R528	B5	R1223	E3	R1508	*G4	RB1218	E3
C5	*F2	C423	*C3	C800	*D4	C1109	*D2	C1368	*F3	CL304	*C3	CN1200	G5	IC311	C2	R20	E1	R289	*B4	R530	*C5	R1224	E5	R1509	G4	RB1219	F4
C6	*E1	C424	*C3	C801	*D5	C1110	*D3	C1369	*F2	CL306	*C3	CN1300	G1	IC400	C2	R21	*E2	R290	*B4	R531	D6	R1225	E5	R1510	G5	RB1220	F4
C7	*E1	C425	*B3	C802	*D5	C1111	*D2	C1370	*F2	CL307	*B3	CN1301	C1	IC401	*D5	R22	*E2	R291	A5	R532	*D6	R1226	E5	R1511	G4	RB1221	F3
C8	*E1	C426	*C3	C803	*D5	C1112	*D3	C1371	*G3	CL309	*C3	CN1400	*G3	IC500	A5	R23	*E2	R292	A5	R534	C6	R1227	F4	R1512	G4	RB1222	*E3
C9	F2	C427	*B3	C804	*D4	C1113	*D2	C1372	F3	CL310	*C3	CN1401	E1	IC501	*B5	R24	G2	R293	*A4	R536	*C6	R1228	F4	R1513	G4	RB1223	*F3
C10	*F1	C428	*C3	C805	*D5	C1114	*D2	C1373	F3	CL311	*C3	CN1500	G3	IC502	B5	R100	E1	R294	*A4	R537	*D6	R1229	*F4	R1519	*G4	RB1224	F4
C11	*F2	C429	*B3	C806	*D5	C1115	*D2	C1374	F3	CL312	*C3			IC503	C5	R101	*F1	R295	B4	R538	C6	R1230	F4	R1520	*G4	RB1225	F4
C12	*F1	C430	*B3	C807	*D5	C1116	*D2	C1375	G3	CL314	*C3	D1	G2	IC504	*C5	R200	A4	R296	*C3	R539	*D6	R1231	F3	R1522	*G4	RB1226	*E3
C13	*F1	C431	*C4	C808	*D5	C1200	*E5	C1376	*F2	CL500	A5	D300	B4	IC505	C6	R201	*A4	R300	B3	R543	*B5	R1232	E1	R1523	*G4	RB1227	*E3
C14	E2	C432	*C3	C809	*D4	C1201	*E4	C1377	*F2	CL501	A6	D301	B4	IC506	*C6	R202	*A4	R301	*B3	R545	*B6	R1233	F3	R1524	*G4	RB1228	*E3
C15	F2	C433	*B3	C810	*D5	C1202	*E4	C1378	*F3	CL502	A6	D302	B4	IC507	*B6	R204	B3	R306	C2	R546	*C6	R1234	F3	R1525	*G4	RB1229	*F3
C16	*E1	C434	*C3	C811	*D4	C1203	*F4	C1379	*F3	CL503	A6	D303	B4	IC508	B5	R206	B3	R307	B2	R547	*B6	R1235	F4			RB1230	*E3
C17	*E1	C435	*B3	C812	*D4	C1204	*F4	C1380	F3	CL504	A5	D500	A5	IC509	B6	R207	B3	R308	C2	R550	B6	R1237	D2	RB200	A4	RB1231	*F3
C18	E2	C436	*B3	C813	*D4	C1205	D1	C1381	F3	CL505	A6	D501	A5	IC510	B6	R209	B4	R309	C2	R600	*D5	R1238	D2	RB201	B3	RB1232	F4
C19	G2	C437	*B3	C814	*D4	C1206	F4	C1382	F2	CL510	C6	D600	D6	IC600	D5	R210	*B3	R310	C2	R601	D6	R1239	E2	RB202	C4	RB1233	*E3
C20	G2	C438	*B3	C815	*D5	C1207	*F3	C1383	F2	CL511	*D6	D601	D6	IC601	D6	R211	*B3	R311	C2	R602	D6	R1241	*F4	RB203	B3	RB1235	F4
C100	*E1	C439	*B3	C816	*D5	C1208	E2	C1404	G2	CL600	*D5	D602	D6	IC602	*D4	R212	C3	R312	C2	R603	D6	R1242	D1	RB204	B4	RB1236	E4
C101	*E1	C440	*C3	C817	*D4	C1209	D1	C1405	*F2	CL601	*D5	D603	D6	IC700	D4	R213	C3	R313	C2	R604	D6	R1243	D1	RB205	C4	RB1237	E4
C200	*A4	C441	*C3	C818	*D4	C1210	F4	C1406	*F2	CL602	E5	D604	E5	IC701	*D4	R214	C3	R314	C2	R605	D6	R1245	*E4	RB206	C4	RB1238	E4
C201	*A4	C442	*C3	C819	*D5	C1211	E2	C1407	*F2	CL603	E5	D605	F5	IC851	D4	R215	C3	R315	C3	R606	D6	R1246	*F4	RB207	B3	RB1239	*E3
C202	*C3	C443	*C3	C820	*D5	C1212	E2	C1408	F2	CL604	E5	D1300	G1	IC852	*D4	R216	C3	R316	C2	R607	D6	R1248	D1	RB208	B3	RB1240	E3
C203	*B3	C444	*C3	C821	*D5	C1213	E1	C1409	F2	CL605	D6	D1301	G1	IC853	D3	R217	C3	R317	C2	R611	D6	R1249	F4	RB209	B3	RB1241	F5
C204	*B3	C445	*C3	C822	*D5	C1214	D1	C1410	*E2	CL700	C4	D1302	G1	IC854	C5	R218	C3	R318	*B2	R612	D6	R1250	*F4	RB210	C4	RB1304	E5
C205	*B3	C446	*C3	C823	*C5	C1215	D1	C1411	*F2	CL701	C4	D1303	G1	IC855	*D3	R219	C3	R319	*B3	R613	D6	R1251	D1	RB211	B4	RB1308	E5
C206	A4	C447	*C3	C824	*D5	C1300	*E5	C1412	*G2	CL702	*D4	D1304	G1	IC900	D2	R220	C3	R320	*B3	R614	E6	R1252	*D1	RB212	C4	RB1309	E5
C207	C4	C448	*C3	C825	*D5	C1301	*F4	C1413	*F2	CL703	*D4	D1305	G1	IC1200	E1	R221	C3	R324	*C3	R617	E6	R1253	D1	RB213	B3	RB1310	E5
C208	C4	C449	*C3	C826	*D5	C1302	*E4	C1414	*F2	CL704	*D4	D1500	G3	IC1201	E1	R222	C3	R325	*C3	R618	E6	R1254	*F3	RB214	B3	RB1311	E5
C209	C4	C450	*C3	C827	*D5	C1303	*E4	C1415	F2	CL705	*D4	D1501	G3	IC1202	D1	R223	C3	R326	*B3	R619	E6	R1255	*F3	RB215	B4	RB1312	E5
C210	C4	C451	*C2	C828	*D5	C1304	*E4	C1416	G2	CL800	*D5	D1502	G3	IC1203	*E5	R224	C3	R328	*C2	R620	E6	R1300	*F5	RB216	*C4	RB1313	F5
C211	B4	C452	C2	C829	*D5	C1305	*E4	C1417	G2	CL801	D5			IC1204	F3	R225	*B3	R329	*C2	R621	E6	R1301	E5	RB217	*B4	RB1314	E5
C212	C5	C453	C2	C830	*D5	C1306	*E4	C1420	E1	CL802	D4	E1	C2	IC1205	E2	R226	*B3	R330	*C2	R622	E6	R1302	E5	RB218	*C4	RB1315	E5
C213	C5	C454	D2	C831	*D5	C1307	*E4	C1421	E1	CL803	D5	E2	G5	IC1206	*F3	R227	*B3	R331	*C2	R623	E6	R1303	*E5	RB219	*B3	RB1316	E5
C214	*C5	C455	C2	C832	*D5	C1308	*E4	C1422	*F4	CL804	D5	E3	D6	IC1207	*D1	R228	B3	R332	*C2	R624	E6	R1304	*E5	RB220	*B4	RB1317	*C2
C215	*C5	C456	*D5	C833	*D5	C1309	*E4	C1423	*G4	CL908	*D2	E4	*G1	IC1208	*F4	R229	B3	R338	*C2	R626	E6	R1305	*E4	RB221	*C4	RB1318	*D2
C216	*C5	C457	*C6	C834	*D5	C1310	*E4	C1424	*G3	CL909	D2	E5	*C4	IC1209	*D1	R230	B4	R339	*C1	R627	E6	R1306	E5	RB222	*C4	RB1400	*G3
C217	*C5	C504	*A6	C835	*D5	C1311	*E4	C1425	*G3	CL910	D2	E6	*A3	IC1210	D1	R231	B3	R340	C2	R628	E6	R1307	*E4	RB223	*B4	RB1402	*G4
C218	*B5	C505	A6	C836	*D5	C1312	*E4	C1500	*G4	CL911	D2			IC1211	D1	R232	B3	R341	C2	R629	E6	R1308	*F5	RB224	*C4	RB1422	F1
C219	*C4	C506	*A5	C837	*D5	C1313	*E4	C1501	*F5	CL912	E2	FB1	F1	IC1300	E4	R233	*B4	R343	C2	R630	E6	R1309	G1	RB225	*B4	RB1424	F1
C220	*C4	C507	A5	C838	*D5	C1314	*E4	C1502	*F4	CL915	E2	FB2	G2	IC1301	E3	R234	B4	R346	D2	R631	E6	R1310	G1	RB226	B3	RB1425	F1
C221	B4	C508	A5	C839	*D5	C1315	*F4	C1503	*G4	CL916	E3	FB10	*F4	IC1302	*E3	R235	*C4	R347	E5	R634	E6	R1311	G1	RB227	*C4	RB1426	F1
C222	B4	C509	A5	C840	*D5	C1316	*F4	C1504	*G4	CL917	E3	FB11	*G3	IC1303	*F3	R236	B3	R348	E6	R702	*D4	R1312	E5	RB228	*C4	RB1427	E1
C223	B4	C510	A6	C841	*D5	C1317	*F4	C1505	*G4	CL918	E3	FB200	*B3	IC1304	F3	R237	*C4	R349	D2	R803	*C5	R1313	G1	RB229	*C3	RB1428	E1
C224	B4	C511	*B5	C842	*D4	C1318	*F4	C1506	*G4	CL919	E3	FB201	*B3	IC1305	E2	R238	B3	R350	D2	R804	C5	R1314	G1	RB300	*C2	RB1429	E1
C225	A4	C512	*B5	C843	*C4	C1319	*F4	C1507	*G4	CL1012	D3	FB202	A4	IC1400	G3	R239	B3	R351	D2	R806	D4	R1315	G1	RB301	*B2	RB1431	E1
C226	B5	C513	C5	C844	*C4	C1320	*F4	C1508	*G4	CL1013	D3	FB300	E5	IC1401	G2	R240	C3	R352	D2	R807	*C5	R1316	E5	RB302	*A4	RB1432	E1
C227	*B5	C514	B5	C845	*D5	C1321	*E4	C1509	*G4	CL1014	D3	FB301	D2	IC1402	*G2	R241	C3	R353	D2	R813	D5	R1317	E5	RB303	*A4	RB1433	E1
C228	*B5	C515	C5	C846	*D5	C1322	*E5	C1510	*G4	CL1015	D3	FB302	E6	IC1403	E2	R242	C3	R354	D2	R814	D4	R1318	E5	RB304	*A3	RB1434	E1
C229	*B5	C516	C5	C847	*D4	C1323	*F5	C1511	*F4	CL1016	D2	FB400	*B4	IC1404	*E2	R244	B3	R355	E5	R816	D5	R1319	E5	RB305	*B2	RB1435	F1
C230	*B5	C517	*C5	C848	*D4	C1324	*E4	C1512	*F4	CL1017	D2	FB401	*B3	IC1405	*G2	R245	B3	R356	E5	R817	D4	R1320	*E5	RB306	C2	RB1436	F1
C231	*A5	C518	*C5	C849	*D4	C1325	*E4	C1513	*F4	CL1100	D3	FB402	*D6	IC1406	G2	R246	*C3	R357	E6	R851	D3	R1321	*E4	RB307	C2	RB1437	F1
C232	*B4	C519	A6	C850	*D4	C1326	*E4	C1514	*F4	CL1101	*D2	FB500	*A5	IC1500	G4	R247	*C3	R358	E6	R852	D3	R1322	E5	RB308	*C2		
C233	B5	C520	A6	C851	D3	C1327	*F4	C1515	*F4	CL1102	*D2	FB501	*A6	IC1501	*G4	R248	*C3	R359	E5	R853	E3	R1323	E5	RB309	*C2	S200	C1
C234	*B4	C521	B6	C852	D3	C1328	*F4	C1516	*G4	CL1103	*D2	FB800	*D4			R249	*B3	R360	E5	R854	*D3	R1324	E2	RB310	*C2	S300	A4
C300	*B3	C522	*A6	C853	E3	C1329	*E5	C1517	*G4	CL1104	*E2	FB801	*D5	L1	E2	R250	B3	R361	E6	R855	E3	R1325	E5	RB311	*C2	S301	D1
C301	*B3	C524	B6	C854	*D3	C1330	*F4	C1518	*G4	CL1201	*F4	FB802	*C4	L2	F2	R251	B4	R362	C2	R856	*D3	R1326	E5	RB312	B4	S1200	E1
C303	C2	C525	*A6	C900	*D2	C1331	*F5	C1519	*G4	CL1202	*F4	FB1100	*D2	L3	E2	R252	C3	R363	C2	R857	C5	R1327	E5	RB500	A5	S1201	D1
C304	*C2	C526	*B6	C901	*D2	C1332	*E4	C1520	*G4	CL1203	*F4	FB1101	D2	L400	C2	R253	C3	R364	C2	R900	D2	R1328	E2	RB501	A5	S1301	D1
C305	*A3	C527	*B5	C902	*D2	C1333	*F4	C1521	*G4	CL1204	*F4	FB1200	*E4	L600	E6	R254	B3	R402	C2	R901	D2	R1329	E2	RB502	*A5		
C306	*A3	C528	*B5	C903	*D2	C1334	*E4	C1522	G5	CL1205	*F4	FB1201	*E4	L601	D6	R255	*C4	R403	C2	R902	D2	R1330	*E3	RB533	*B6	TP1	F2
C307	D1	C529	*B6	C904	*D2	C1335	*E4	C1523	G5	CL1206	*F4	FB1202	*F3			R256	*C3	R404	D2	R905	*E2	R1331	*E3	RB534	*B6		
C308	D1	C530	*B6	C905	*D2	C1336	*E4	C1524	*G3	CL1208	*F4	FB1203	F4	Q1	*E5	R257	C3	R405	D2	R906	*D2	R1332	*G3	RB535	*B6	X300	E5
C309	C1	C531	D6	C906	*D2	C1337	*E5	C1526	G3	CL1209	F4	FB1204	E2	Q2	*E5	R258	C3	R406	C2	R1000	*D2	R1333	*F3	RB536	*B6	X600	D6
C311	E5	C532	C6	C907	*D2	C1338	*E4	C1527	G3	CL1210	F4	FB1300	*E5	Q3	*G4	R259	B4	R407	C2	R1100	*D3	R1334	F2	RB537	*B6	X1500	G5
C312	E5	C533	C6	C908	*D2	C1339	*E4	C1530	G3	CL1300	*G1	FB1301	*E4	Q4	*F2	R260	*B4	R408	C2	R1101	*D2	R1335	F2	RB538	*B6		
C313	D2	C534	*C6	C909	*D2	C1340	*E4			CL1301	*G1	FB1302	E3	Q300	*C1	R261	B3	R409	C2	R1102	*D2	R1336	*E4	RB539	*B6		
C314	E5	C535	*D6	C910	*E2	C1341	*E4	CL100	*D1	CL1302	*G1	FB1500	*F4	Q400	D2	R262	B3	R500	*A6	R1103	*E2	R1337	E2	RB544	B6		
C315	D2	C536	*D6	C911	*E3	C1342	*E4	CL101	E1	CL1303	*G1	FB1501	*G4	Q401	D2	R263	B3	R501	A4	R1104	*D3	R1338	E2	RB545	B6		
C316	E6	C600	E6	C912	*D2	C1343	*E5	CL103	*F1	CL1304	*G1	FB1502	*G4	Q500	*D6	R264	C4	R502	A4	R1106	*D2	R1339	E2	RB546	B6		
C317	C2	C601	D6	C913	*D2	C1344	*E4	CL104	*F1	CL1305	*G1	FB1503	G3	Q851	D3	R265	*B3	R503	A5	R1107	*D3	R1340	E2	RB547	B6		
C400	*B4	C602	E6	C1000	*D3	C1345	*E4	CL105	*D1	CL1401	*G2			Q852	D3	R266	*B3	R504	*A5	R1117	*D2	R1400	*G3	RB548	B6		
C401	*B3	C603	D6	C1001	*D3	C1346	*E4	CL106	*F1	CL1402	*G2	IC1	E2	Q853	D3	R267	C3	R505	A5	R1200	*F4	R1401	*G3	RB549	B6		
C402	*B3	C604	*D6	C1002	*D3	C1347	*E4	CL107	*F1	CL1500	G4	IC2	F2	Q854	E3	R268	C3	R506	A5	R1201	*E5	R1402	*G3	RB550	B6		
C403	*B3	C605	*D6	C1003	*D3	C1348	*E4	CL108	*F1	CL1501	*G4	IC3	E2	Q855	*D3	R269	C4	R507	*A5	R1202	*F4	R1403	*G3	RB600	D6		
C404	*B3	C606	*D6	C1004	*D3	C1349	*E4	CL200	C3	CL1502	*G4	IC8	*F2	Q856	E3	R270	C3	R508	*A5	R1203	*F4	R1410	*G2	RB1200	F4		
C405	*B3	C607	D6	C1005	*D3	C1350	*E4	CL201	*C3	CL1505	G5	IC10	*F2	Q857	*D3	R271	C3	R509	A6	R1204	E1	R1411	F2	RB1201	E4		
C406	*B3	C608	D6	C1006	*D3	C1351	*C1	CL202	C3	CL1506	G5	IC11	G2	Q1200	D1	R272	C4	R510	A6	R1205	E5	R1413	*F2	RB1202	E4		
C407	*B3	C610	D6	C1007	*D3	C1352	E3	CL203	*C3	CL1507	G5	IC100	*E1	Q1201	D1	R273	C4	R511	*A5	R1207	*E4	R1414	*F2	RB1203	E4		
C408	*B3	C612	*D6	C1008	*D2	C1353	E3	CL204	*C3	CL1508	G4	IC101	*E1	Q1400	*F2	R274	C4	R512	A5	R1208	*E4	R1416	*F2	RB1204	E4		
C409	*B3	C613	*D6	C1009	*D3	C1354	E3	CL205	C3	CL1509	G4	IC200	C3			R275	C4	R513	A4	R1209	*F4	R1417	*F2	RB1205	F4		
C410	*C3	C614	*D6	C1010	*D2	C1355	*E3	CL206	B4	CL2901	*F1	IC201	C4	R3	*E1	R276	C4	R514	A5	R1210	F4	R1418	F2	RB1206	F4		
C411	*C4	C615	*D6	C1011	*D2	C1356	*E2	CL207	B4	CL2903	G1	IC202	B4	R6	E1	R277	C4	R515	*A6	R1212	*F4	R1419	G2	RB1207	F4		
C412	*C3	C616	*E6	C1012	*D2	C1357	*F2	CL208	*B3	CL2904	G4	IC203	*C4	R7	*F2	R278	C4	R516	*A5	R1213	*F4	R1420	G2	RB1208	F4		
C413	*C3	C617	*D6	C1013	*D3	C1358	F3	CL209	*B3	CL2905	F3	IC204	*B4	R8	*F2	R279	C4	R517	*A6	R1214	E5	R1432	F1	RB1209	E3		
C414	*C3	C618	*D6	C1100	D2	C1359	E3	CL210	B4			IC300	*B3	R9	*F1	R280	C4	R518	*A6	R1215	*E4	R1440	*G2	RB1210	F3		
C415	*C3	C619	E6	C1101	*D3	C1360	E3	CL211	B4	CN100	*E1	IC301	*A3	R10	*F1	R281	C4	R519	A6	R1216	E5	R1441	E1	RB1211	E3		
C416	*C4	C620	E6	C1102	*D3	C1361	E2	CL214	C3	CN200	*A4	IC302	*A3	R11	*E2	R282	C4	R520	A6	R1217	*F4	R1500	*G4	RB1212	E3		
C417	*C3	C621	E6	C1103	*D3	C1362	E2	CL216	*B3	CN300	C2	IC303	*B3	R12	*E2	R283	C4	R521	A6	R1218	F4	R1501	G4	RB1213	F4		
C418	*C3	C622	E6	C1104	*D3	C1363	*F2	CL217	*C3	CN301	A3	IC304	*C2	R13	*E2	R284	C4	R522	*A5	R1219	*F4	R1502	*G4	RB1214	F4		
C419	*C3	C624	E6	C1105	*D3	C1364	*E2	CL218	D1	CN500	A4	IC305	D2	R14	*F2	R285	B3	R523	*A6	R1220	*E4	R1503	*F4	RB1215	F4		
C420	*C3	C625	*D4	C1106	*D2	C1365	*E2	CL301	*B3	CN501	B6	IC306	E5	R15	*F2	R286	B3	R524	A6	R1221	*E4	R1504	G4	RB1216	E3		
C421	*C3	C700	D3	C1107	*D2	C1366	*E3	CL302	*B2	CN502	C6	IC308	C1	R16	*F2	R287	B5	R525	*A6	R1222	*F4	R1507	G4	RB1217	E3		

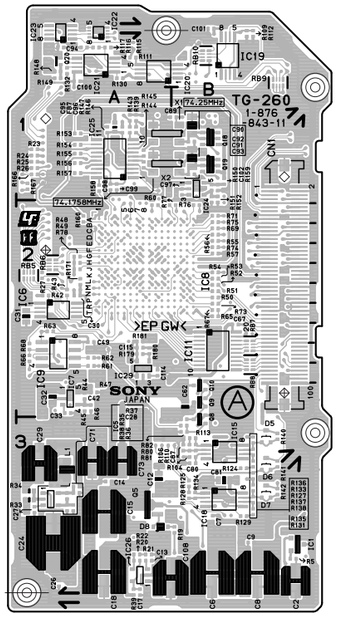


TG-260 -A SIDE-
SUFFIX: -11

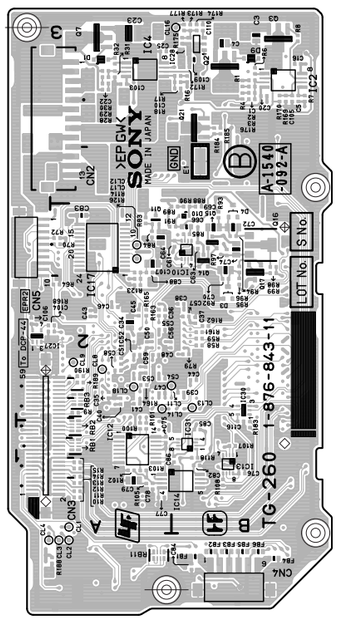


TG-260 -B SIDE-
SUFFIX: -11

TG-260 (1-876-843-11)
---
*:B SIDE


C1	*B3	C99	A1	Q8	B3	R82	B3	R181	A2
C2	B3	C100	A1	Q9	B2	R83	*A2	R183	*B1
C3	*B3	C101	B1	Q10	B2	R84	*A2	R184	*B3
C4	*B3	C102	B1	Q11	*A2	R85	*B2	R185	*B3
C5	*B3	C103	*A3	Q14	*B2	R88	*B2	R188	*A1
C6	B3	C104	*A2	Q15	*B2	R89	*B2	R189	*A2
C7	B3	C105	*B3	Q16	*B2	R90	*B2	R190	*A2
C8	B3	C106	*A2	Q17	*B2	R91	*B2		
C9	B3	C107	*A2	Q18	B1	R92	*B2	RB1	*A1
C10	*B3	C108	A3	Q19	B1	R93	*B2	RB2	*A1
C12	A3	C109	*B3	Q20	A1	R94	*B2	RB3	*A2
C13	A3	C110	*B3	Q21	*B3	R95	*B2	RB5	A2
C14	A3	C114	A2			R96	*B2	RB6	A2
C15	A3	C115	A2	R1	*B3	R97	*B2	RB7	B2
C16	*B3	C116	*B1	R2	*B3	R98	*B2	RB8	B2
C17	A3			R3	*B3	R99	*B2	RB9	B1
C18	A3	CL1	*A1	R4	*B3	R100	*A1	RB10	B1
C20	*B3	CL2	*A1	R5	B3	R101	*A1	RB11	*A1
C22	*A3	CL3	*A1	R6	*B3	R102	*A1		
C23	*A3	CL4	*A1	R7	*B3	R103	*A1	X1	A1
C24	A3	CL8	*A2	R8	*B3	R104	B3	X2	A1
C25	*A3	CL9	*A2	R9	*A2	R105	*A1		
C26	A3	CL11	*A2	R10	*A1	R106	B3		
C27	A3	CL12	*A2	R11	*A1	R107	*B1		
C28	A3	CL13	*B2	R12	*A1	R108	*B1		
C29	A3	CL14	*A2	R13	*A1	R109	B1		
C30	A2	CL16	*B3	R14	*A1	R110	B3		
C31	A2	CL17	*A2	R15	*A1	R111	A1		
C32	A2	CL18	*A2	R16	*B3	R112	B1		
C33	A2			R17	*B3	R113	B3		
C34	*A2	CN1	B2	R18	*B3	R114	*A2		
C35	*A2	CN2	*A3	R19	B3	R115	A1		
C36	*A2	CN3	*A1	R20	A3	R116	A1		
C37	*B2	CN4	*B1	R21	A3	R117	A1		
C38	*B2	CN5	*A2	R22	A3	R118	*B1		
C39	*B2			R23	A1	R123	*A2		
C40	*A2	D1	*A3	R24	A1	R124	B3		
C41	*A2	D3	*B2	R25	A1	R125	B3		
C42	A2	D4	*B2	R26	A1	R126	*A2		
C43	*A2	D5	B3	R27	A2	R127	B3		
C44	*B2	D6	B3	R28	*A3	R128	B3		
C45	*A2	D7	B3	R29	*A3	R129	B3		
C46	*A2	D8	A3	R30	*A3	R130	A1		
C47	*A2	D9	*B3	R31	*A3	R131	B3		
C48	*A2	D10	*B2	R32	*A3	R132	A1		
C49	A2			R33	A3	R133	B3		
C50	*A2	E1	*B3	R34	A3	R134	B3		
C51	*A2			R35	A3	R135	B3		
C52	*A2	FB1	*B1	R36	A3	R136	B3		
C53	*A2	FB2	*B1	R37	A3	R137	B3		
C54	*A2	FB3	*B1	R38	A3	R138	B3		
C55	*A2	FB4	*B1	R39	A3	R139	A1		
C56	*A2	FB5	*B1	R42	A2	R140	B3		
C57	*B2	FB6	*B1	R43	A2	R141	B3		
C58	*A2	FB7	A1	R44	A2	R142	B3		
C59	*A2			R45	A2	R143	A1		
C61	*B2	IC1	B3	R46	A2	R144	A1		
C62	B2	IC2	*B3	R47	A2	R145	A1		
C63	*B2	IC4	*A3	R48	A2	R146	A1		
C64	*A2	IC5	A3	R49	A2	R147	A1		
C66	*B2	IC6	A2	R50	B2	R148	A1		
C67	B2	IC7	A2	R51	B2	R149	A1		
C69	*B2	IC8	A2	R52	B2	R150	B1		
C70	*B2	IC9	A2	R53	B2	R151	B1		
C71	A3	IC10	*B2	R54	B2	R152	B1		
C72	*B2	IC11	B2	R55	B2	R153	A1		
C73	A3	IC12	*A1	R56	B2	R154	A1		
C74	*B2	IC13	*B1	R57	B2	R155	A1		
C75	*A1	IC14	*B1	R58	*B2	R156	A1		
C76	*B1	IC15	B3	R59	*B2	R157	A1		
C77	*A1	IC17	*A2	R60	A2	R158	A1		
C78	*A1	IC18	B3	R61	A2	R159	B1		
C79	*A1	IC19	B1	R62	A2	R160	A2		
C80	B3	IC20	A1	R63	A2	R161	*B2		
C81	B3	IC21	A1	R64	*A2	R162	*B2		
C82	*B1	IC22	A1	R65	B2	R163	*A2		
C83	*A2	IC23	A1	R66	A2	R164	*A2		
C84	*B1	IC24	B1	R67	B2	R165	*A2		
C85	*B1	IC25	A1	R68	A2	R166	A1		
C86	*B1	IC26	A3	R69	B2	R167	A1		
C87	B3	IC27	*A2	R70	*A2	R168	*A2		
C88	*A2	IC28	*B3	R71	B2	R169	*B3		
C89	B1	IC29	A2	R72	*A2	R170	*B3		
C90	B1	IC30	*B2	R73	B2	R171	A2		
C91	B1	IC31	*B1	R74	B2	R172	*B3		
C92	B1			R75	B2	R173	*B3		
C93	B1	L1	A3	R76	B2	R174	*B3		
C94	A1			R77	B2	R175	*B3		
C95	A1	Q2	*B3	R78	A2	R176	*B3		
C96	A1	Q3	*B3	R79	*B2	R177	*B3		
C97	B1	Q5	A3	R80	B3	R179	A2		
C98	A1	Q7	*A3	R81	B3	R180	A2		

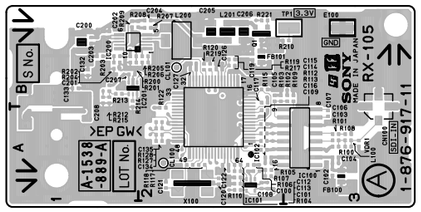


RX-105 -A SIDE-
SUFFIX: -11

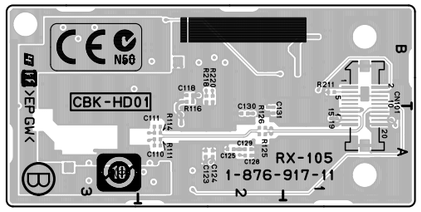

RX-105 -B SIDE-
SUFFIX: -11



IV-59 -A SIDE-
SUFFIX: -11



IV-59 -B SIDE-
SUFFIX: -11

RX-105 (1-876-917-11)
---
*:B SIDE

C100	A2	C128	*A2	IC100	A3	R116	*B2	R219	B2
C101	A2	C129	*A2	IC101	A2	R117	A2	R220	*B2
C102	A3	C130	*A2	IC102	A2	R118	A2	R221	B2
C103	A3	C131	*A2	IC200	B1	R119	B2		
C104	A3	C132	B1	IC201	B1	R120	B2	TP1	B3
C105	B2	C133	B1			R122	A2		
C106	A3	C134	A2	L100	A3	R125	*A2	VDR1	A3
C107	A3	C135	A2	L200	B2	R126	*A2		
C108	A2	C200	B1	L201	B2	R127	A2	X100	A2
C109	A2	C201	B1			R128	A2		
C110	*A2	C202	B1	Q1	B2	R200	B1		
C111	*A2	C203	B1			R201	B1		
C112	A2	C204	B2	R100	A3	R202	B1		
C113	A2	C205	B2	R101	A3	R203	B1		
C114	A2	C206	B2	R102	B3	R204	B1		
C115	A2	C207	B1	R103	B2	R205	B2		
C116	A2	C208	B1	R104	A2	R206	B2		
C117	B2			R105	A2	R207	B2		
C118	*B2	CL100	A2	R106	A2	R208	B2		
C119	B2	CL101	B2	R107	A2	R209	B1		
C120	A2			R108	A3	R210	B3		
C121	A2	CN100	A3	R109	B3	R211	*B1		
C122	A2	CN101	*A1	R110	A2	R212	B1		
C123	*A2			R111	*A2	R213	B1		
C124	*A2	E100	B3	R112	A2	R214	B1		
C125	*A2			R113	A2	R215	B1		
C126	B2	FB100	A3	R114	*A2	R217	B2		
C127	B2	FB101	B2	R115	B2	R218	*B2		

IV-59 (1-876-918-11)
---
*:B SIDE

C100	*A2	C128	B2	CL103	*A2	L100	A2	R117	B2
C101	*A2	C129	B2	CL104	*A1	L101	A2	R118	*B1
C102	A2	C130	B2	CL105	*A1	L102	B2	R119	*B1
C103	A2	C131	A2	CL106	*B2			R120	A2
C104	A2	C132	B2	CL107	*B2	Q100	B1	R121	A2
C105	B2	C133	B2	CL108	*B2	Q101	A1	R122	A2
C106	B2	C134	B1	CL109	*B1	Q102	A1	R123	B1
C107	*A2	C135	A1	CL110	*B1	Q104	A1	R124	A1
C108	*A2	C136	B1	CL111	*B1	Q105	A1	R125	A1
C109	B2	C137	A2	CL112	*B2	Q106	A1	R126	B1
C110	B2	C138	B1	CL113	*B1			R127	A1
C111	*A2	C139	B2	CL114	*B1	R100	A2	R128	A1
C112	A2	C140	B1			R101	A2	R130	A1
C113	A2	C141	B2	CN101	*A1	R102	A2	R131	A1
C114	A2	C142	B2			R103	A2	R132	A1
C115	A2	C143	B2	E100	B2	R104	A2	R133	A1
C116	A2	C144	*A2			R105	*A2	R134	A2
C117	*A2	C145	*A2	IC100	*B2	R106	*A2	R135	B1
C118	A1	C146	B1	IC101	*A2	R107	B2	R136	*A2
C119	A1	C147	A1	IC102	*B2	R108	B2	R137	A2
C120	A2	C148	A1	IC103	*A2	R109	B2		
C121	A2	C150	A1	IC104	A1	R110	A1	RB100	A1
C122	A2	C151	A1	IC105	*A2	R111	A1	RB101	B1
C123	A2	C152	A1	IC106	B1	R112	A2		
C124	*A2			IC107	B1	R113	A2	TP100	*A2
C125	*B1	CL100	*A1	IC108	B1	R114	B1		
C126	*B1	CL101	*A2	IC109	A1	R115	B1	X100	B2
C127	A2	CL102	*A1			R116	B2		

PDW-F800 (SY) J,E
9-968-644-01

Sony Corporation

Printed in Japan
2009. 6 16
©2009