

SONY®

SOLID-STATE MEMORY CAMCORDER

PXW-X500

XDCAM Power HAD **FX** **SxS**

MPEG HD422 **HDMI** **XAVC** **DVCAM**

FACTORY SERVICE MANUAL

1st Edition

警告

このマニュアルは、サービス専用です。
お客様が、このマニュアルに記載された設置や保守、点検、修理などを行うと感電や火災、人身事故につながる可能性があります。
危険をさけるため、サービストレーニングを受けた技術者のみご使用ください。

WARNING

This manual is intended for qualified service personnel only.
To reduce the risk of electric shock, fire or injury, do not perform any servicing other than that contained in the operating instructions unless you are qualified to do so. Refer all servicing to qualified service personnel.

WARNUNG

Die Anleitung ist nur für qualifiziertes Fachpersonal bestimmt.
Alle Wartungsarbeiten dürfen nur von qualifiziertem Fachpersonal ausgeführt werden. Um die Gefahr eines elektrischen Schlages, Feuergefahr und Verletzungen zu vermeiden, sind bei Wartungsarbeiten strikt die Angaben in der Anleitung zu befolgen. Andere als die angegeben Wartungsarbeiten dürfen nur von Personen ausgeführt werden, die eine spezielle Befähigung dazu besitzen.

AVERTISSEMENT

Ce manuel est destiné uniquement aux personnes compétentes en charge de l'entretien. Afin de réduire les risques de décharge électrique, d'incendie ou de blessure n'effectuer que les réparations indiquées dans le mode d'emploi à moins d'être qualifié pour en effectuer d'autres. Pour toute réparation faire appel à une personne compétente uniquement.

目次

このマニュアルについて

本書の目的.....	3
関連マニュアル.....	3
商標について.....	3
回路図／マウント図／部品表.....	3

1. Spare Parts

1-1. Note on Repair Parts.....	1-1
1-2. Electrical Parts List.....	1-2

2. Schematic Diagrams

AU-360.....	2-1
AXM-52.....	2-10
CI-50.....	2-11
CN-3722.....	2-12
CN-3723.....	2-12
CN-3736.....	2-12
CN-3737.....	2-12
CN-3738.....	2-13
DCP-67 [SUFFIX:-11, -12].....	2-14
DET-50.....	2-21
DET-60.....	2-21
DIF-232.....	2-22
DPR-362 [SUFFIX:-11, -12].....	2-23
EC-82.....	2-76
ENC-162.....	2-78
FP-208.....	2-79
HN-415.....	2-85
HP-171.....	2-86
HPR-53.....	2-87
IF-1209.....	2-101
IO-275.....	2-103
KY-736.....	2-103
LED-529.....	2-104
MB-1210.....	2-105
PA-422.....	2-107
PA-423.....	2-108
PA-424.....	2-109
RE-326.....	2-110
RM-246.....	2-119
RX-136.....	2-120
SD-58.....	2-121
SE-1155.....	2-121
SW-1632.....	2-121
SW-1650.....	2-121
SW-1651.....	2-122

SW-1652.....	2-122
SW-1653.....	2-122
TG-287.....	2-123

3. Board Layouts

AU-360.....	3-1
AXM-52.....	3-1
CI-50.....	3-1
CN-3722.....	3-1
CN-3723.....	3-2
CN-3736.....	3-2
CN-3737.....	3-2
CN-3738.....	3-2
DCP-67 [SUFFIX: -11].....	3-2
DCP-67 [SUFFIX: -12].....	3-3
DET-50.....	3-3
DET-60.....	3-3
DIF-232.....	3-3
DPR-362 [SUFFIX: -11].....	3-4
DPR-362 [SUFFIX: -12].....	3-5
EC-82.....	3-6
ENC-162.....	3-6
FP-208.....	3-7
HN-415.....	3-8
HP-171.....	3-8
HPR-53.....	3-9
IF-1209.....	3-9
IO-275.....	3-9
KY-736.....	3-10
LED-529.....	3-10
MB-1210.....	3-11
PA-422.....	3-12
PA-423.....	3-12
PA-424.....	3-12
RE-326.....	3-13
RM-246.....	3-13
RX-136.....	3-13
SD-58.....	3-14
SE-1155.....	3-14
SW-1632.....	3-14
SW-1650.....	3-14
SW-1651.....	3-14
SW-1652.....	3-14
SW-1653.....	3-15
TG-287.....	3-15
Board Parts Location.....	3-16

このマニュアルについて

本書の目的

本書は、システム／サービスエンジニアの方々にご使用いただくことを想定し、本機の保守に関する情報、部品レベルまでのサービスを前提とした情報を記載しています。

点検や修理を行う前に、別冊のサービスマニュアルの 安全に関する注意文を必ずお読みください。

関連マニュアル

この機種には以下のマニュアルが用意されています。

入手を希望される方は、ソニーの営業窓口にお問い合わせください。

- 取扱説明書 (本機に付属)
本機を実際に運用および操作するのに必要なマニュアルです。
- サービスマニュアル
本機の保守に関する情報、ブロックレベルまでのサービスを前提とした情報を記載しています。

商標について

このマニュアルに記載されている商標および登録商標は下記のとおりです。

- SxS は、ソニー株式会社の商標です。

その他、記載されているシステム名、製品名は、一般に各開発メーカーの登録商標または商標です。

回路図／マウント図／部品表

- 下記の基板はマウント基板およびマウント部品個々での交換はできません。したがって回路図、マウント図および部品表は、このマニュアルに記載されていません。
 - ハンドル組立
 - GP-1019 基板

Table of Contents

Manual Structure

Purpose of this manual.....	3
Related manuals	3
Trademarks.....	3
Schematic diagrams, board layouts and spare parts.....	3

1. Spare Parts

1-1. Note on Repair Parts.....	1-1
1-2. Electrical Parts List.....	1-2

2. Schematic Diagrams

AU-360.....	2-1
AXM-52.....	2-10
CI-50.....	2-11
CN-3722.....	2-12
CN-3723.....	2-12
CN-3736.....	2-12
CN-3737.....	2-12
CN-3738.....	2-13
DCP-67 [SUFFIX:-11, -12].....	2-14
DET-50.....	2-21
DET-60.....	2-21
DIF-232.....	2-22
DPR-362 [SUFFIX:-11, -12].....	2-23
EC-82.....	2-76
ENC-162.....	2-78
FP-208.....	2-79
HN-415.....	2-85
HP-171.....	2-86
HPR-53.....	2-87
IF-1209.....	2-101
IO-275.....	2-103
KY-736.....	2-103
LED-529.....	2-104
MB-1210.....	2-105
PA-422.....	2-107
PA-423.....	2-108
PA-424.....	2-109
RE-326.....	2-110
RM-246.....	2-119
RX-136.....	2-120
SD-58.....	2-121
SE-1155.....	2-121
SW-1632.....	2-121
SW-1650.....	2-121
SW-1651.....	2-122

SW-1652.....	2-122
SW-1653.....	2-122
TG-287.....	2-123

3. Board Layouts

AU-360.....	3-1
AXM-52.....	3-1
CI-50.....	3-1
CN-3722.....	3-1
CN-3723.....	3-2
CN-3736.....	3-2
CN-3737.....	3-2
CN-3738.....	3-2
DCP-67 [SUFFIX: -11].....	3-2
DCP-67 [SUFFIX:-12].....	3-3
DET-50.....	3-3
DET-60.....	3-3
DIF-232.....	3-3
DPR-362 [SUFFIX: -11].....	3-4
DPR-362 [SUFFIX:-12].....	3-5
EC-82.....	3-6
ENC-162.....	3-6
FP-208.....	3-7
HN-415.....	3-8
HP-171.....	3-8
HPR-53.....	3-9
IF-1209.....	3-9
IO-275.....	3-9
KY-736.....	3-10
LED-529.....	3-10
MB-1210.....	3-11
PA-422.....	3-12
PA-423.....	3-12
PA-424.....	3-12
RE-326.....	3-13
RM-246.....	3-13
RX-136.....	3-13
SD-58.....	3-14
SE-1155.....	3-14
SW-1632.....	3-14
SW-1650.....	3-14
SW-1651.....	3-14
SW-1652.....	3-14
SW-1653.....	3-15
TG-287.....	3-15
Board Parts Location.....	3-16

Manual Structure

Purpose of this manual

This manual describes the information items that premise the service based on the block parts assuming use of system and service engineers.

For the safety precautions, refer to the Service Manual provided separately from this Factory Service Manual.

Related manuals

The following manuals are available in this model.

If this manual is required, please contact your local Sony Sales Office/Service Center.

- Operating Instructions (Supplied with the unit)
This manual is necessary for application and operation of the unit.
- Service Manual
This manual describes the information items that premise the service based on the block parts.

Trademarks

Trademarks and registered trademarks used in this manual are as follows.

- SxS is the registered trademarks or trademarks of the Sony Corporation.

Other system names and product names written in this manual are usually registered trademarks or trademarks of respective development manufacturers.

Schematic diagrams, board layouts and spare parts

- Following boards cannot be replaced on the board-level service or part-level service. So schematic diagrams, board layouts and spare parts are not described in this manual.
 - Handle assembly
 - GP-1019 board

Section 1

Spare Parts

1-1. Note on Repair Parts

1. Safety Related Components Warning

WARNING

Components marked △ are critical to safe operation. Therefore, specified parts should be used in the case of replacement.

2. Standardization of Parts

Some repair parts supplied by Sony differ from those used for the unit. These are because of parts commonality and improvement.

3. Stock of Parts

Parts marked with “o” at SP (Supply Code) column of the spare parts list may not be stocked. Therefore, the delivery date will be delayed.

4. Harness

Harnesses with no part number are not registered as spare parts.

1. 安全重要部品

△警告

△印のついた部品は安全性を維持するために重要な部品です。したがって、交換する時は必ず指定の部品を使ってください。

2. 部品の共通化

ソニーから供給する補修用部品は、セットに使われているものと異なることがあります。これは部品の共通化、改良等によるものです。

3. 部品の在庫

部品表の SP (Supply code) 欄に “o” で示される部品は在庫していないことがあります。納期が長くなる場合があります。

4. ハーネス

部品番号の記載されていないハーネスは、サービス部品として登録されていません。

1-2. Electrical Parts List

AU-360 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-2061-111-A	s MOUNTED CIRCUIT BOARD, AU-360
2pcs	3-855-938-01	s SCREW
C100	1-118-036-11	s CAP, CERAMIC 0.1MF X5R (1608)
C101	1-118-036-11	s CAP, CERAMIC 0.1MF X5R (1608)
C102	1-118-036-11	s CAP, CERAMIC 0.1MF X5R (1608)
C103	1-118-036-11	s CAP, CERAMIC 0.1MF X5R (1608)
C104	1-126-405-21	s CAP, CHIP ELECT 10MF (6.3X5.7)
C105	1-126-405-21	s CAP, CHIP ELECT 10MF (6.3X5.7)
C106	1-126-405-21	s CAP, CHIP ELECT 10MF (6.3X5.7)
C107	1-126-405-21	s CAP, CHIP ELECT 10MF (6.3X5.7)
C108	1-112-021-91	s CAP, CERAMIC 2.2MF C (1608)
C109	1-112-021-91	s CAP, CERAMIC 2.2MF C (1608)
C110	1-114-214-81	s CAP,CHIP CERAMIC470PF CH1005
C111	1-114-214-81	s CAP,CHIP CERAMIC470PF CH1005
C112	1-114-214-81	s CAP,CHIP CERAMIC470PF CH1005
C113	1-114-214-81	s CAP,CHIP CERAMIC470PF CH1005
C200	1-164-874-81	s CAP,CHIP CERAMIC 100PF CH 1005
C201	1-164-874-81	s CAP,CHIP CERAMIC 100PF CH 1005
C202	1-164-874-81	s CAP,CHIP CERAMIC 100PF CH 1005
C203	1-164-874-81	s CAP,CHIP CERAMIC 100PF CH 1005
C204	1-116-738-11	o CAP, CERAMIC 1MF X6S 1005
C205	1-116-738-11	o CAP, CERAMIC 1MF X6S 1005
C206	1-116-738-11	o CAP, CERAMIC 1MF X6S 1005
C207	1-116-738-11	o CAP, CERAMIC 1MF X6S 1005
C208	1-116-720-11	o CAP, CERAMIC 10MF X5R 1608
C209	1-116-720-11	o CAP, CERAMIC 10MF X5R 1608
C210	1-116-720-11	o CAP, CERAMIC 10MF X5R 1608
C211	1-116-720-11	o CAP, CERAMIC 10MF X5R 1608
C212	1-116-720-11	o CAP, CERAMIC 10MF X5R 1608
C213	1-116-720-11	o CAP, CERAMIC 10MF X5R 1608
C300	1-118-036-11	s CAP, CERAMIC 0.1MF X5R (1608)
C301	1-118-036-11	s CAP, CERAMIC 0.1MF X5R (1608)
C302	1-118-036-11	s CAP, CERAMIC 0.1MF X5R (1608)
C303	1-118-036-11	s CAP, CERAMIC 0.1MF X5R (1608)
C304	1-126-405-21	s CAP, CHIP ELECT 10MF (6.3X5.7)
C305	1-126-405-21	s CAP, CHIP ELECT 10MF (6.3X5.7)
C306	1-126-405-21	s CAP, CHIP ELECT 10MF (6.3X5.7)
C307	1-126-405-21	s CAP, CHIP ELECT 10MF (6.3X5.7)
C308	1-114-214-81	s CAP,CHIP CERAMIC470PF CH1005
C309	1-114-214-81	s CAP,CHIP CERAMIC470PF CH1005
C310	1-114-214-81	s CAP,CHIP CERAMIC470PF CH1005
C311	1-114-214-81	s CAP,CHIP CERAMIC470PF CH1005
C312	1-164-874-81	s CAP,CHIP CERAMIC 100PF CH 1005
C313	1-164-874-81	s CAP,CHIP CERAMIC 100PF CH 1005
C314	1-164-874-81	s CAP,CHIP CERAMIC 100PF CH 1005
C315	1-164-874-81	s CAP,CHIP CERAMIC 100PF CH 1005
C316	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C317	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C318	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C319	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C320	1-116-720-11	o CAP, CERAMIC 10MF X5R 1608
C321	1-116-720-11	o CAP, CERAMIC 10MF X5R 1608
C322	1-116-720-11	o CAP, CERAMIC 10MF X5R 1608
C323	1-116-720-11	o CAP, CERAMIC 10MF X5R 1608
C324	1-116-720-11	o CAP, CERAMIC 10MF X5R 1608
C325	1-116-720-11	o CAP, CERAMIC 10MF X5R 1608
C400	1-116-720-11	o CAP, CERAMIC 10MF X5R 1608
C401	1-116-720-11	o CAP, CERAMIC 10MF X5R 1608
C402	1-116-720-11	o CAP, CERAMIC 10MF X5R 1608
C403	1-116-720-11	o CAP, CERAMIC 10MF X5R 1608
C404	1-116-720-11	o CAP, CERAMIC 10MF X5R 1608

AU-360 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C405	1-116-720-11	o CAP, CERAMIC 10MF X5R 1608
C406	1-116-720-11	o CAP, CERAMIC 10MF X5R 1608
C407	1-116-720-11	o CAP, CERAMIC 10MF X5R 1608
C408	1-116-720-11	o CAP, CERAMIC 10MF X5R 1608
C409	1-116-720-11	o CAP, CERAMIC 10MF X5R 1608
C410	1-164-874-81	s CAP,CHIP CERAMIC 100PF CH 1005
C411	1-164-874-81	s CAP,CHIP CERAMIC 100PF CH 1005
C412	1-164-874-81	s CAP,CHIP CERAMIC 100PF CH 1005
C413	1-164-874-81	s CAP,CHIP CERAMIC 100PF CH 1005
C414	1-164-874-81	s CAP,CHIP CERAMIC 100PF CH 1005
C415	1-164-874-81	s CAP,CHIP CERAMIC 100PF CH 1005
C416	1-164-874-81	s CAP,CHIP CERAMIC 100PF CH 1005
C417	1-164-874-81	s CAP,CHIP CERAMIC 100PF CH 1005
C418	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C419	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C420	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C421	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C422	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C423	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C424	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C425	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C426	1-116-737-11	s CAP, CERAMIC 1MF X5R 1005
C427	1-116-737-11	s CAP, CERAMIC 1MF X5R 1005
C428	1-116-737-11	s CAP, CERAMIC 1MF X5R 1005
C429	1-116-737-11	s CAP, CERAMIC 1MF X5R 1005
C430	1-126-390-21	s CAP, CHIP ELECT 22MF (4X5.7)
C431	1-126-390-21	s CAP, CHIP ELECT 22MF (4X5.7)
C432	1-126-390-21	s CAP, CHIP ELECT 22MF (4X5.7)
C433	1-126-390-21	s CAP, CHIP ELECT 22MF (4X5.7)
C434	1-126-390-21	s CAP, CHIP ELECT 22MF (4X5.7)
C435	1-126-390-21	s CAP, CHIP ELECT 22MF (4X5.7)
C436	1-126-390-21	s CAP, CHIP ELECT 22MF (4X5.7)
C437	1-126-390-21	s CAP, CHIP ELECT 22MF (4X5.7)
C438	1-114-214-81	s CAP,CHIP CERAMIC470PF CH1005
C439	1-114-214-81	s CAP,CHIP CERAMIC470PF CH1005
C440	1-114-214-81	s CAP,CHIP CERAMIC470PF CH1005
C441	1-114-214-81	s CAP,CHIP CERAMIC470PF CH1005
C442	1-114-214-81	s CAP,CHIP CERAMIC470PF CH1005
C443	1-114-214-81	s CAP,CHIP CERAMIC470PF CH1005
C444	1-114-214-81	s CAP,CHIP CERAMIC470PF CH1005
C445	1-114-214-81	s CAP,CHIP CERAMIC470PF CH1005
C446	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C447	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C448	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C449	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C450	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C451	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C452	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C453	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C454	1-127-950-21	s CAP, CHIP FILM 0.01MF (2012)
C455	1-127-950-21	s CAP, CHIP FILM 0.01MF (2012)
C456	1-127-950-21	s CAP, CHIP FILM 0.01MF (2012)
C457	1-127-950-21	s CAP, CHIP FILM 0.01MF (2012)
C600	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C601	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C602	1-116-720-11	o CAP, CERAMIC 10MF X5R 1608
C603	1-116-720-11	o CAP, CERAMIC 10MF X5R 1608
C604	1-116-720-11	o CAP, CERAMIC 10MF X5R 1608
C605	1-116-720-11	o CAP, CERAMIC 10MF X5R 1608
C606	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C607	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C608	1-126-390-21	s CAP, CHIP ELECT 22MF (4X5.7)
C609	1-126-390-21	s CAP, CHIP ELECT 22MF (4X5.7)
C610	1-126-390-21	s CAP, CHIP ELECT 22MF (4X5.7)
C611	1-126-390-21	s CAP, CHIP ELECT 22MF (4X5.7)

AU-360 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C612	1-126-390-21 s	CAP, CHIP ELECT 22MF (4X5.7)
C613	1-126-390-21 s	CAP, CHIP ELECT 22MF (4X5.7)
C614	1-126-390-21 s	CAP, CHIP ELECT 22MF (4X5.7)
C615	1-116-738-11 o	CAP, CERAMIC 1MF X6S 1005
C616	1-116-738-11 o	CAP, CERAMIC 1MF X6S 1005
C617	1-126-390-21 s	CAP, CHIP ELECT 22MF (4X5.7)
C618	1-118-399-11 s	CAP, CERAMIC 2200PF X7R 1005
C619	1-118-399-11 s	CAP, CERAMIC 2200PF X7R 1005
C620	1-100-573-11 s	CAP,CHIP CERAMIC 390PF B 1005
C621	1-100-573-11 s	CAP,CHIP CERAMIC 390PF B 1005
C622	1-100-573-11 s	CAP,CHIP CERAMIC 390PF B 1005
C623	1-100-573-11 s	CAP,CHIP CERAMIC 390PF B 1005
C624	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C625	1-164-934-81 s	CAP, CHIP CERAMIC 330PF B 1005
C626	1-164-934-81 s	CAP, CHIP CERAMIC 330PF B 1005
C627	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C628	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C629	1-164-934-81 s	CAP, CHIP CERAMIC 330PF B 1005
C630	1-164-934-81 s	CAP, CHIP CERAMIC 330PF B 1005
C631	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C632	1-164-934-81 s	CAP, CHIP CERAMIC 330PF B 1005
C633	1-164-934-81 s	CAP, CHIP CERAMIC 330PF B 1005
C634	1-164-934-81 s	CAP, CHIP CERAMIC 330PF B 1005
C635	1-164-934-81 s	CAP, CHIP CERAMIC 330PF B 1005
C636	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C637	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C638	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C639	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C640	1-116-744-11 s	CAP, CERAMIC 0.22MF X5R 1005
C641	1-116-744-11 s	CAP, CERAMIC 0.22MF X5R 1005
C642	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C643	1-116-738-11 o	CAP, CERAMIC 1MF X6S 1005
C644	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C645	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C646	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C647	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C648	1-116-738-11 o	CAP, CERAMIC 1MF X6S 1005
C649	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C650	1-112-021-91 s	CAP, CERAMIC 2.2MF C (1608)
C652	1-164-858-81 s	CAP, CHIP CERAMIC 22PF CH 1005
C653	1-116-744-11 s	CAP, CERAMIC 0.22MF X5R 1005
C654	1-128-394-21 s	CAP, ELECT 220MF 8X6
C655	1-128-394-21 s	CAP, ELECT 220MF 8X6
C656	1-128-394-21 s	CAP, ELECT 220MF 8X6
C657	1-128-394-21 s	CAP, ELECT 220MF 8X6
C658	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C659	1-116-741-11 s	CAP, CERAMIC 0.47MF X5R 1005
C660	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C661	1-112-021-91 s	CAP, CERAMIC 2.2MF C (1608)
C662	1-112-021-91 s	CAP, CERAMIC 2.2MF C (1608)
C663	1-116-738-11 o	CAP, CERAMIC 1MF X6S 1005
C666	1-112-021-91 s	CAP, CERAMIC 2.2MF C (1608)
C667	1-112-021-91 s	CAP, CERAMIC 2.2MF C (1608)
C668	1-116-724-11 s	CAP, CERAMIC 4.7MF X5R 1608
C669	1-116-724-11 s	CAP, CERAMIC 4.7MF X5R 1608
C670	1-112-021-91 s	CAP, CERAMIC 2.2MF C (1608)
C671	1-116-724-11 s	CAP, CERAMIC 4.7MF X5R 1608
C672	1-112-021-91 s	CAP, CERAMIC 2.2MF C (1608)
C673	1-116-724-11 s	CAP, CERAMIC 4.7MF X5R 1608
C674	1-112-021-91 s	CAP, CERAMIC 2.2MF C (1608)
C675	1-112-021-91 s	CAP, CERAMIC 2.2MF C (1608)
C676	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C677	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C800	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C801	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)

AU-360 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C802	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C803	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C804	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C805	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C806	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C807	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C900	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C901	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C902	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C903	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C904	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C905	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C906	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C907	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C908	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C909	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C910	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C911	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C912	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C913	1-116-741-11 s	CAP, CERAMIC 0.47MF X5R 1005
C914	1-116-744-11 s	CAP, CERAMIC 0.22MF X5R 1005
C915	1-116-744-11 s	CAP, CERAMIC 0.22MF X5R 1005
C916	1-116-741-11 s	CAP, CERAMIC 0.47MF X5R 1005
C917	1-116-741-11 s	CAP, CERAMIC 0.47MF X5R 1005
C918	1-116-744-11 s	CAP, CERAMIC 0.22MF X5R 1005
C919	1-116-744-11 s	CAP, CERAMIC 0.22MF X5R 1005
C920	1-116-741-11 s	CAP, CERAMIC 0.47MF X5R 1005
C921	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C922	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C923	1-116-340-11 s	CAP, ELECT 22MF 105
C924	1-116-340-11 s	CAP, ELECT 22MF 105
C925	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C926	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C927	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C928	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C929	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C930	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C931	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C932	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C933	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C934	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C935	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C936	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C1000	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C1001	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C1002	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C1003	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C1004	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C1005	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C1006	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C1100	1-118-418-11 s	CAP, CERAMIC 22MF X5R (2012)
C1101	1-118-418-11 s	CAP, CERAMIC 22MF X5R (2012)
C1102	1-118-388-11 s	CAP, CERAMIC 0.047MF X7R 1005
C1103	1-112-021-91 s	CAP, CERAMIC 2.2MF C (1608)
C1104	1-112-021-91 s	CAP, CERAMIC 2.2MF C (1608)
C1105	1-100-055-21 s	CAP, CHIP CERAMIC 22MF B 3225
C1106	1-100-055-21 s	CAP, CHIP CERAMIC 22MF B 3225
C1107	1-164-850-81 s	CAP, CHIP CERAMIC 10PF CH 1005
C1108	1-112-021-91 s	CAP, CERAMIC 2.2MF C (1608)
C1109	1-118-418-11 s	CAP, CERAMIC 22MF X5R (2012)
C1110	1-100-880-91 s	CAP, CERAMIC 100MF C (3225)
C1111	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C1112	1-116-744-11 s	CAP, CERAMIC 0.22MF X5R 1005
C1113	1-116-713-11 s	CAP, CERAMIC 22MF X5R 2012
C1114	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608

AU-360 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C1115	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C1116	1-107-819-81 s	CAP,CHIP CERAMIC 22000PF B1005
C1117	1-118-399-11 s	CAP, CERAMIC 2200PF X7R 1005
C1118	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C1119	1-116-713-11 s	CAP, CERAMIC 22MF X5R 2012
C1120	1-107-819-81 s	CAP,CHIP CERAMIC 22000PF B1005
C1121	1-118-418-11 s	CAP, CERAMIC 22MF X5R (2012)
C1122	1-116-350-21 s	CAP, CHIP CERAMIC 47UF B 2012
C1123	1-116-350-21 s	CAP, CHIP CERAMIC 47UF B 2012
C1124	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C1125	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C1126	1-165-467-21 s	CAP, ELECT 47MF 8X10
C1127	1-100-880-91 s	CAP, CERAMIC 100MF C (3225)
C1128	1-118-044-11 s	CAP, CERAMIC 1MF X5R (2012)
C1129	1-118-044-11 s	CAP, CERAMIC 1MF X5R (2012)
C1130	1-116-713-11 s	CAP, CERAMIC 22MF X5R 2012
C1131	1-107-819-81 s	CAP,CHIP CERAMIC 22000PF B1005
C1132	1-116-713-11 s	CAP, CERAMIC 22MF X5R 2012
C1133	1-107-819-81 s	CAP,CHIP CERAMIC 22000PF B1005
CN001	1-784-200-31 s	CONNECTOR, BOARD TO BOARD 140P
D200	6-503-343-01 s	DI DAN217WGTL
D201	6-503-343-01 s	DI DAN217WGTL
D202	6-503-343-01 s	DI DAN217WGTL
D203	6-503-343-01 s	DI DAN217WGTL
D308	6-503-343-01 s	DI DAN217WGTL
D309	6-503-343-01 s	DI DAN217WGTL
D310	6-503-343-01 s	DI DAN217WGTL
D311	6-503-343-01 s	DI DAN217WGTL
D400	8-719-991-01 s	DIODE DAP222-TL
D401	8-719-991-01 s	DIODE DAP222-TL
D402	8-719-991-01 s	DIODE DAP222-TL
D403	8-719-991-01 s	DIODE DAP222-TL
D600	6-503-343-01 s	DI DAN217WGTL
D601	6-503-343-01 s	DI DAN217WGTL
D602	6-503-343-01 s	DI DAN217WGTL
D603	6-503-343-01 s	DI DAN217WGTL
D1100	6-501-123-01 s	DIODE RB160M-60TR
D1101	6-501-123-01 s	DIODE RB160M-60TR
D1102	6-501-123-01 s	DIODE RB160M-60TR
D1103	6-501-123-01 s	DIODE RB160M-60TR
D1104	8-719-989-04 s	DIODE DAN222-TL
D1105	6-501-123-01 s	DIODE RB160M-60TR
D1106	6-501-123-01 s	DIODE RB160M-60TR
D1107	8-719-989-04 s	DIODE DAN222-TL
FB100	1-400-461-21 s	FERRITE, EMI (SMD) (1005)
FB101	1-400-461-21 s	FERRITE, EMI (SMD) (1005)
FB102	1-400-461-21 s	FERRITE, EMI (SMD) (1005)
FB103	1-400-461-21 s	FERRITE, EMI (SMD) (1005)
FB300	1-400-461-21 s	FERRITE, EMI (SMD) (1005)
FB301	1-400-461-21 s	FERRITE, EMI (SMD) (1005)
FB302	1-400-461-21 s	FERRITE, EMI (SMD) (1005)
FB303	1-400-461-21 s	FERRITE, EMI (SMD) (1005)
FB900	1-481-377-21 s	FERRITE, EMI (SMD)
FB901	1-481-377-21 s	FERRITE, EMI (SMD)
FB1000	1-481-377-21 s	FERRITE, EMI (SMD)
FB1100	1-481-377-21 s	FERRITE, EMI (SMD)
FB1101	1-481-377-21 s	FERRITE, EMI (SMD)
FL600	1-234-939-21 s	FILTER, EMI REMOVAL (SMD)
FL601	1-234-939-21 s	FILTER, EMI REMOVAL (SMD)
FL602	1-234-939-21 s	FILTER, EMI REMOVAL (SMD)
FL603	1-234-939-21 s	FILTER, EMI REMOVAL (SMD)
FL604	1-234-939-21 s	FILTER, EMI REMOVAL (SMD)

AU-360 BOARD

Ref. No. or Q'ty	Part No.	SP Description
FL1000	1-234-939-21 s	FILTER, EMI REMOVAL (SMD)
IC200	8-759-422-21 s	IC NJM4580V (TE2)
IC201	8-759-422-21 s	IC NJM4580V (TE2)
IC300	8-759-422-21 s	IC NJM4580V (TE2)
IC301	8-759-422-21 s	IC NJM4580V (TE2)
IC400	8-759-833-99 s	IC TC74HC4052AFT (EL)
IC401	8-759-833-99 s	IC TC74HC4052AFT (EL)
IC402	8-759-833-99 s	IC TC74HC4052AFT (EL)
IC403	8-759-833-99 s	IC TC74HC4052AFT (EL)
IC404	8-759-833-99 s	IC TC74HC4052AFT (EL)
IC405	8-759-422-21 s	IC NJM4580V (TE2)
IC406	8-759-422-21 s	IC NJM4580V (TE2)
IC407	8-759-422-21 s	IC NJM4580V (TE2)
IC408	8-759-422-21 s	IC NJM4580V (TE2)
IC409	8-759-422-21 s	IC NJM4580V (TE2)
IC410	8-759-422-21 s	IC NJM4580V (TE2)
IC411	8-759-422-21 s	IC NJM4580V (TE2)
IC412	8-759-422-21 s	IC NJM4580V (TE2)
IC421	8-759-194-97 s	IC NJM4560M-D (TE2)
IC422	8-759-194-97 s	IC NJM4560M-D (TE2)
IC423	8-759-422-21 s	IC NJM4580V (TE2)
IC600	6-721-434-01 s	IC AK4621EF-E2
IC601	6-721-434-01 s	IC AK4621EF-E2
IC602	8-759-422-21 s	IC NJM4580V (TE2)
IC603	8-759-422-21 s	IC NJM4580V (TE2)
IC802	8-759-598-43 s	IC TC7WH04FK
IC803	6-711-485-01 s	IC TC74VCX125FK (EL)
IC804	6-711-485-01 s	IC TC74VCX125FK (EL)
IC900	6-709-647-01 s	IC TLC2932AIPWR
IC901	6-709-647-01 s	IC TLC2932AIPWR
IC902	6-713-513-01 s	IC AK4127VF-E2
IC903	6-713-513-01 s	IC AK4127VF-E2
IC1100	6-705-480-01 s	IC LT3467ES6#TR
IC1101	6-703-223-01 s	IC MAX668EUB+TG069
IC1102	6-708-889-01 s	IC MP2105DJ-LF-Z
IC1103	6-708-889-01 s	IC MP2105DJ-LF-Z
L200	1-481-175-21 s	INDUCTOR 4.7UH
L201	1-481-175-21 s	INDUCTOR 4.7UH
L300	1-481-175-21 s	INDUCTOR 4.7UH
L301	1-481-175-21 s	INDUCTOR 4.7UH
L600	1-469-553-21 s	INDUCTOR, CHIP 4.7UH (LB2016)
L601	1-469-553-21 s	INDUCTOR, CHIP 4.7UH (LB2016)
L602	1-481-175-21 s	INDUCTOR 4.7UH
L603	1-481-175-21 s	INDUCTOR 4.7UH
L604	1-481-175-21 s	INDUCTOR 4.7UH
L605	1-481-175-21 s	INDUCTOR 4.7UH
L900	1-469-549-21 s	INDUCTOR, CHIP 1.0UH (LB2016)
L901	1-469-555-21 s	INDUCTOR, CHIP 10UH (LB2016)
L902	1-469-555-21 s	INDUCTOR, CHIP 10UH (LB2016)
L1100	1-481-175-21 s	INDUCTOR 4.7UH
L1102	1-469-559-21 s	INDUCTOR, CHIP 47UH (LB2016)
L1103	1-481-175-21 s	INDUCTOR 4.7UH
L1104	1-481-074-21 s	INDUCTOR 2.2UH
L1106	1-469-549-21 s	INDUCTOR, CHIP 1.0UH (LB2016)
L1107	1-469-549-21 s	INDUCTOR, CHIP 1.0UH (LB2016)
L1108	1-469-559-21 s	INDUCTOR, CHIP 47UH (LB2016)
L1109	1-457-854-11 s	COIL, CHOKE 2.2UH
Q100	6-550-981-01 s	TR RN1905
Q101	6-550-981-01 s	TR RN1905
Q102	8-729-112-85 s	TRANSISTOR 2SA1330-T106
Q103	8-729-112-85 s	TRANSISTOR 2SA1330-T106
Q104	6-551-294-01 s	TRANSISTOR MCH6606-TL-E
Q105	6-551-294-01 s	TRANSISTOR MCH6606-TL-E
Q106	6-551-294-01 s	TRANSISTOR MCH6606-TL-E

AU-360 BOARD

Ref. No. or Q'ty	Part No.	SP Description
Q107	6-551-294-01 s	TRANSISTOR MCH6606-TL-E
Q108	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q109	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q110	6-551-041-01 s	TR RN4904
Q111	6-551-041-01 s	TR RN4904
Q112	6-551-294-01 s	TRANSISTOR MCH6606-TL-E
Q113	6-551-294-01 s	TRANSISTOR MCH6606-TL-E
Q114	6-551-294-01 s	TRANSISTOR MCH6606-TL-E
Q115	6-551-294-01 s	TRANSISTOR MCH6606-TL-E
Q116	6-551-041-01 s	TR RN4904
Q117	6-551-041-01 s	TR RN4904
Q118	6-551-294-01 s	TRANSISTOR MCH6606-TL-E
Q119	6-551-294-01 s	TRANSISTOR MCH6606-TL-E
Q120	6-551-294-01 s	TRANSISTOR MCH6606-TL-E
Q121	6-551-294-01 s	TRANSISTOR MCH6606-TL-E
Q122	6-551-041-01 s	TR RN4904
Q123	6-551-041-01 s	TR RN4904
Q200	6-551-041-01 s	TR RN4904
Q201	6-551-041-01 s	TR RN4904
Q202	6-551-294-01 s	TRANSISTOR MCH6606-TL-E
Q203	6-551-294-01 s	TRANSISTOR MCH6606-TL-E
Q204	6-551-041-01 s	TR RN4904
Q205	6-551-041-01 s	TR RN4904
Q206	6-551-294-01 s	TRANSISTOR MCH6606-TL-E
Q207	6-551-294-01 s	TRANSISTOR MCH6606-TL-E
Q208	6-551-294-01 s	TRANSISTOR MCH6606-TL-E
Q209	6-551-294-01 s	TRANSISTOR MCH6606-TL-E
Q210	6-551-041-01 s	TR RN4904
Q211	6-551-041-01 s	TR RN4904
Q212	8-729-927-99 s	TRANSISTOR 2SC4617TL-QR
Q213	8-729-928-19 s	TRANSISTOR 2SA1774TL-QR
Q300	6-550-981-01 s	TR RN1905
Q301	6-550-981-01 s	TR RN1905
Q302	8-729-112-85 s	TRANSISTOR 2SA1330-T106
Q303	8-729-112-85 s	TRANSISTOR 2SA1330-T106
Q304	6-551-041-01 s	TR RN4904
Q305	6-551-041-01 s	TR RN4904
Q306	6-551-294-01 s	TRANSISTOR MCH6606-TL-E
Q307	6-551-294-01 s	TRANSISTOR MCH6606-TL-E
Q308	6-551-041-01 s	TR RN4904
Q309	6-551-041-01 s	TR RN4904
Q310	6-551-294-01 s	TRANSISTOR MCH6606-TL-E
Q311	6-551-294-01 s	TRANSISTOR MCH6606-TL-E
Q312	6-551-294-01 s	TRANSISTOR MCH6606-TL-E
Q313	6-551-294-01 s	TRANSISTOR MCH6606-TL-E
Q314	6-551-041-01 s	TR RN4904
Q315	6-551-041-01 s	TR RN4904
Q316	8-729-927-99 s	TRANSISTOR 2SC4617TL-QR
Q317	8-729-928-19 s	TRANSISTOR 2SA1774TL-QR
Q400	6-551-294-01 s	TRANSISTOR MCH6606-TL-E
Q401	6-551-294-01 s	TRANSISTOR MCH6606-TL-E
Q402	6-551-294-01 s	TRANSISTOR MCH6606-TL-E
Q403	6-551-294-01 s	TRANSISTOR MCH6606-TL-E
Q404	6-551-041-01 s	TR RN4904
Q405	6-551-294-01 s	TRANSISTOR MCH6606-TL-E
Q406	6-551-294-01 s	TRANSISTOR MCH6606-TL-E
Q407	6-551-294-01 s	TRANSISTOR MCH6606-TL-E
Q408	6-551-294-01 s	TRANSISTOR MCH6606-TL-E
Q409	6-551-041-01 s	TR RN4904
Q410	6-551-294-01 s	TRANSISTOR MCH6606-TL-E
Q411	6-551-294-01 s	TRANSISTOR MCH6606-TL-E
Q412	6-551-294-01 s	TRANSISTOR MCH6606-TL-E
Q413	6-551-294-01 s	TRANSISTOR MCH6606-TL-E
Q414	6-551-041-01 s	TR RN4904
Q600	8-729-013-37 s	TRANSISTOR 2SC4213-AB-TE85L

AU-360 BOARD

Ref. No. or Q'ty	Part No.	SP Description
Q601	8-729-013-37 s	TRANSISTOR 2SC4213-AB-TE85L
Q602	8-729-013-37 s	TRANSISTOR 2SC4213-AB-TE85L
Q603	8-729-013-37 s	TRANSISTOR 2SC4213-AB-TE85L
Q1100	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q1101	6-552-022-01 s	TR SI4436DY-T1-E3
Q1102	8-729-928-19 s	TRANSISTOR 2SA1774TL-QR
Q1103	8-729-928-55 s	TRANSISTOR DTA123JE-TL
Q1104	8-729-928-19 s	TRANSISTOR 2SA1774TL-QR
R102	1-208-911-81 s	RES, CHIP 10K (1005)
R103	1-208-911-81 s	RES, CHIP 10K (1005)
R104	1-208-935-81 s	RES, CHIP 100K (1005)
R105	1-208-935-81 s	RES, CHIP 100K (1005)
R106	1-218-855-91 s	RES, CHIP 2.2K (1608)
R107	1-218-855-91 s	RES, CHIP 2.2K (1608)
R108	1-218-855-91 s	RES, CHIP 2.2K (1608)
R109	1-216-813-91 s	RES, CHIP 220 (1608)
R110	1-218-855-91 s	RES, CHIP 2.2K (1608)
R111	1-218-855-91 s	RES, CHIP 2.2K (1608)
R112	1-218-855-91 s	RES, CHIP 2.2K (1608)
R113	1-216-813-91 s	RES, CHIP 220 (1608)
R114	1-218-855-91 s	RES, CHIP 2.2K (1608)
R115	1-218-855-91 s	RES, CHIP 2.2K (1608)
R116	1-218-855-91 s	RES, CHIP 2.2K (1608)
R117	1-216-813-91 s	RES, CHIP 220 (1608)
R118	1-218-855-91 s	RES, CHIP 2.2K (1608)
R119	1-218-855-91 s	RES, CHIP 2.2K (1608)
R120	1-218-855-91 s	RES, CHIP 2.2K (1608)
R121	1-216-813-91 s	RES, CHIP 220 (1608)
R122	1-208-943-81 s	RES, CHIP 220K (1005)
R123	1-208-943-81 s	RES, CHIP 220K (1005)
R124	1-208-911-81 s	RES, CHIP 10K (1005)
R125	1-208-911-81 s	RES, CHIP 10K (1005)
R126	1-208-911-81 s	RES, CHIP 10K (1005)
R127	1-208-911-81 s	RES, CHIP 10K (1005)
R128	1-208-899-81 s	RES, CHIP 3.3K (1005)
R129	1-208-899-81 s	RES, CHIP 3.3K (1005)
R130	1-208-911-81 s	RES, CHIP 10K (1005)
R131	1-208-911-81 s	RES, CHIP 10K (1005)
R132	1-208-911-81 s	RES, CHIP 10K (1005)
R133	1-208-911-81 s	RES, CHIP 10K (1005)
R134	1-208-927-81 s	RES, CHIP 47K (1005)
R135	1-208-927-81 s	RES, CHIP 47K (1005)
R136	1-208-927-81 s	RES, CHIP 47K (1005)
R137	1-208-927-81 s	RES, CHIP 47K (1005)
R138	1-208-713-11 s	RES, CHIP 18K (1005)
R139	1-208-713-11 s	RES, CHIP 18K (1005)
R140	1-208-713-11 s	RES, CHIP 18K (1005)
R141	1-208-713-11 s	RES, CHIP 18K (1005)
R142	1-208-911-81 s	RES, CHIP 10K (1005)
R143	1-208-911-81 s	RES, CHIP 10K (1005)
R144	1-208-911-81 s	RES, CHIP 10K (1005)
R145	1-208-911-81 s	RES, CHIP 10K (1005)
R146	1-208-895-81 s	RES, CHIP 2.2K (1005)
R147	1-208-894-81 s	RES, CHIP 2.0K (1005)
R148	1-208-895-81 s	RES, CHIP 2.2K (1005)
R149	1-208-894-81 s	RES, CHIP 2.0K (1005)
R150	1-208-911-81 s	RES, CHIP 10K (1005)
R151	1-208-911-81 s	RES, CHIP 10K (1005)
R152	1-208-911-81 s	RES, CHIP 10K (1005)
R153	1-208-911-81 s	RES, CHIP 10K (1005)
R154	1-220-870-81 s	RES, CHIP 10 (1005)
R155	1-208-913-81 s	RES, CHIP 12K (1005)
R156	1-220-870-81 s	RES, CHIP 10 (1005)
R157	1-208-913-81 s	RES, CHIP 12K (1005)
R158	1-208-902-81 s	RES, CHIP 4.3K (1005)

AU-360 BOARD

Ref. No. or Q'ty	Part No.	SP Description
R159	1-208-902-81 s	RES, CHIP 4.3K (1005)
R160	1-208-902-81 s	RES, CHIP 4.3K (1005)
R161	1-208-902-81 s	RES, CHIP 4.3K (1005)
R162	1-208-911-81 s	RES, CHIP 10K (1005)
R163	1-208-911-81 s	RES, CHIP 10K (1005)
R164	1-208-911-81 s	RES, CHIP 10K (1005)
R165	1-208-911-81 s	RES, CHIP 10K (1005)
R166	1-208-927-81 s	RES, CHIP 47K (1005)
R167	1-208-927-81 s	RES, CHIP 47K (1005)
R168	1-208-911-81 s	RES, CHIP 10K (1005)
R169	1-208-911-81 s	RES, CHIP 10K (1005)
R170	1-208-911-81 s	RES, CHIP 10K (1005)
R171	1-208-911-81 s	RES, CHIP 10K (1005)
R172	1-208-911-81 s	RES, CHIP 10K (1005)
R173	1-208-911-81 s	RES, CHIP 10K (1005)
R174	1-208-911-81 s	RES, CHIP 10K (1005)
R175	1-208-911-81 s	RES, CHIP 10K (1005)
R176	1-220-870-81 s	RES, CHIP 10 (1005)
R177	1-220-870-81 s	RES, CHIP 10 (1005)
R178	1-208-927-81 s	RES, CHIP 47K (1005)
R179	1-220-870-81 s	RES, CHIP 10 (1005)
R180	1-220-870-81 s	RES, CHIP 10 (1005)
R181	1-208-927-81 s	RES, CHIP 47K (1005)
R200	1-208-927-81 s	RES, CHIP 47K (1005)
R201	1-208-927-81 s	RES, CHIP 47K (1005)
R202	1-208-911-81 s	RES, CHIP 10K (1005)
R203	1-208-911-81 s	RES, CHIP 10K (1005)
R204	1-220-874-81 s	RES, CHIP 15 (1005)
R205	1-208-862-81 s	RES, CHIP 91 (1005)
R206	1-220-874-81 s	RES, CHIP 15 (1005)
R207	1-208-862-81 s	RES, CHIP 91 (1005)
R208	1-208-911-81 s	RES, CHIP 10K (1005)
R209	1-208-911-81 s	RES, CHIP 10K (1005)
R210	1-208-911-81 s	RES, CHIP 10K (1005)
R211	1-208-911-81 s	RES, CHIP 10K (1005)
R212	1-208-927-81 s	RES, CHIP 47K (1005)
R213	1-208-927-81 s	RES, CHIP 47K (1005)
R214	1-208-855-81 s	RES, CHIP 47 (1005)
R215	1-208-876-81 s	RES, CHIP 360 (1005)
R216	1-208-855-81 s	RES, CHIP 47 (1005)
R217	1-208-876-81 s	RES, CHIP 360 (1005)
R218	1-208-911-81 s	RES, CHIP 10K (1005)
R219	1-208-911-81 s	RES, CHIP 10K (1005)
R220	1-208-911-81 s	RES, CHIP 10K (1005)
R221	1-208-911-81 s	RES, CHIP 10K (1005)
R222	1-208-873-81 s	RES, CHIP 270 (1005)
R223	1-208-891-81 s	RES, CHIP 1.5K (1005)
R224	1-208-873-81 s	RES, CHIP 270 (1005)
R225	1-208-891-81 s	RES, CHIP 1.5K (1005)
R226	1-208-927-81 s	RES, CHIP 47K (1005)
R227	1-208-927-81 s	RES, CHIP 47K (1005)
R228	1-208-911-81 s	RES, CHIP 10K (1005)
R229	1-208-911-81 s	RES, CHIP 10K (1005)
R230	1-208-910-81 s	RES, CHIP 9.1K (1005)
R231	1-208-910-81 s	RES, CHIP 9.1K (1005)
R232	1-208-899-81 s	RES, CHIP 3.3K (1005)
R233	1-208-899-81 s	RES, CHIP 3.3K (1005)
R234	1-208-899-81 s	RES, CHIP 3.3K (1005)
R235	1-208-899-81 s	RES, CHIP 3.3K (1005)
R236	1-208-895-81 s	RES, CHIP 2.2K (1005)
R237	1-208-895-81 s	RES, CHIP 2.2K (1005)
R302	1-208-911-81 s	RES, CHIP 10K (1005)
R303	1-208-911-81 s	RES, CHIP 10K (1005)
R304	1-208-935-81 s	RES, CHIP 100K (1005)
R305	1-208-935-81 s	RES, CHIP 100K (1005)

AU-360 BOARD

Ref. No. or Q'ty	Part No.	SP Description
R306	1-218-855-91 s	RES, CHIP 2.2K (1608)
R307	1-218-855-91 s	RES, CHIP 2.2K (1608)
R308	1-218-855-91 s	RES, CHIP 2.2K (1608)
R309	1-216-813-91 s	RES, CHIP 220 (1608)
R310	1-218-855-91 s	RES, CHIP 2.2K (1608)
R311	1-218-855-91 s	RES, CHIP 2.2K (1608)
R312	1-218-855-91 s	RES, CHIP 2.2K (1608)
R313	1-216-813-91 s	RES, CHIP 220 (1608)
R314	1-218-855-91 s	RES, CHIP 2.2K (1608)
R315	1-218-855-91 s	RES, CHIP 2.2K (1608)
R316	1-218-855-91 s	RES, CHIP 2.2K (1608)
R317	1-216-813-91 s	RES, CHIP 220 (1608)
R318	1-218-855-91 s	RES, CHIP 2.2K (1608)
R319	1-218-855-91 s	RES, CHIP 2.2K (1608)
R320	1-218-855-91 s	RES, CHIP 2.2K (1608)
R321	1-216-813-91 s	RES, CHIP 220 (1608)
R322	1-208-943-81 s	RES, CHIP 220K (1005)
R323	1-208-943-81 s	RES, CHIP 220K (1005)
R324	1-208-911-81 s	RES, CHIP 10K (1005)
R325	1-208-911-81 s	RES, CHIP 10K (1005)
R326	1-208-911-81 s	RES, CHIP 10K (1005)
R327	1-208-911-81 s	RES, CHIP 10K (1005)
R328	1-220-870-81 s	RES, CHIP 10 (1005)
R329	1-220-870-81 s	RES, CHIP 10 (1005)
R330	1-220-870-81 s	RES, CHIP 10 (1005)
R331	1-220-870-81 s	RES, CHIP 10 (1005)
R332	1-208-927-81 s	RES, CHIP 47K (1005)
R333	1-208-927-81 s	RES, CHIP 47K (1005)
R334	1-208-911-81 s	RES, CHIP 10K (1005)
R335	1-208-911-81 s	RES, CHIP 10K (1005)
R336	1-220-874-81 s	RES, CHIP 15 (1005)
R337	1-208-862-81 s	RES, CHIP 91 (1005)
R338	1-220-874-81 s	RES, CHIP 15 (1005)
R339	1-208-862-81 s	RES, CHIP 91 (1005)
R340	1-208-911-81 s	RES, CHIP 10K (1005)
R341	1-208-911-81 s	RES, CHIP 10K (1005)
R342	1-208-911-81 s	RES, CHIP 10K (1005)
R343	1-208-911-81 s	RES, CHIP 10K (1005)
R344	1-208-927-81 s	RES, CHIP 47K (1005)
R345	1-208-927-81 s	RES, CHIP 47K (1005)
R346	1-208-855-81 s	RES, CHIP 47 (1005)
R347	1-208-876-81 s	RES, CHIP 360 (1005)
R348	1-208-855-81 s	RES, CHIP 47 (1005)
R349	1-208-876-81 s	RES, CHIP 360 (1005)
R350	1-208-911-81 s	RES, CHIP 10K (1005)
R351	1-208-911-81 s	RES, CHIP 10K (1005)
R352	1-208-911-81 s	RES, CHIP 10K (1005)
R353	1-208-911-81 s	RES, CHIP 10K (1005)
R354	1-208-873-81 s	RES, CHIP 270 (1005)
R355	1-208-891-81 s	RES, CHIP 1.5K (1005)
R356	1-208-873-81 s	RES, CHIP 270 (1005)
R357	1-208-891-81 s	RES, CHIP 1.5K (1005)
R358	1-208-927-81 s	RES, CHIP 47K (1005)
R359	1-208-927-81 s	RES, CHIP 47K (1005)
R360	1-208-911-81 s	RES, CHIP 10K (1005)
R361	1-208-911-81 s	RES, CHIP 10K (1005)
R362	1-208-910-81 s	RES, CHIP 9.1K (1005)
R363	1-208-910-81 s	RES, CHIP 9.1K (1005)
R364	1-208-899-81 s	RES, CHIP 3.3K (1005)
R365	1-208-899-81 s	RES, CHIP 3.3K (1005)
R366	1-208-899-81 s	RES, CHIP 3.3K (1005)
R367	1-208-899-81 s	RES, CHIP 3.3K (1005)
R368	1-208-895-81 s	RES, CHIP 2.2K (1005)
R369	1-208-895-81 s	RES, CHIP 2.2K (1005)
R400	1-208-935-81 s	RES, CHIP 100K (1005)

AU-360 BOARD

Ref. No. or Q'ty	Part No.	SP Description
R609	1-208-887-81 s	RES, CHIP 1.0K (1005)
R610	1-208-887-81 s	RES, CHIP 1.0K (1005)
R614	1-208-887-81 s	RES, CHIP 1.0K (1005)
R615	1-208-887-81 s	RES, CHIP 1.0K (1005)
R616	1-208-887-81 s	RES, CHIP 1.0K (1005)
R617	1-208-887-81 s	RES, CHIP 1.0K (1005)
R618	1-208-927-81 s	RES, CHIP 47K (1005)
R619	1-208-927-81 s	RES, CHIP 47K (1005)
R620	1-208-927-81 s	RES, CHIP 47K (1005)
R625	1-208-927-81 s	RES, CHIP 47K (1005)
R626	1-208-927-81 s	RES, CHIP 47K (1005)
R627	1-208-927-81 s	RES, CHIP 47K (1005)
R632	1-208-927-81 s	RES, CHIP 47K (1005)
R633	1-208-927-81 s	RES, CHIP 47K (1005)
R634	1-208-927-81 s	RES, CHIP 47K (1005)
R635	1-208-927-81 s	RES, CHIP 47K (1005)
R636	1-208-899-81 s	RES, CHIP 3.3K (1005)
R637	1-208-899-81 s	RES, CHIP 3.3K (1005)
R638	1-208-899-81 s	RES, CHIP 3.3K (1005)
R639	1-208-899-81 s	RES, CHIP 3.3K (1005)
R640	1-208-913-81 s	RES, CHIP 12K (1005)
R641	1-208-913-81 s	RES, CHIP 12K (1005)
R642	1-208-913-81 s	RES, CHIP 12K (1005)
R643	1-208-913-81 s	RES, CHIP 12K (1005)
R644	1-208-903-81 s	RES, CHIP 4.7K (1005)
R645	1-208-903-81 s	RES, CHIP 4.7K (1005)
R646	1-208-903-81 s	RES, CHIP 4.7K (1005)
R647	1-208-903-81 s	RES, CHIP 4.7K (1005)
R648	1-208-893-81 s	RES, CHIP 1.8K (1005)
R649	1-208-893-81 s	RES, CHIP 1.8K (1005)
R650	1-208-893-81 s	RES, CHIP 1.8K (1005)
R651	1-208-893-81 s	RES, CHIP 1.8K (1005)
R652	1-208-903-81 s	RES, CHIP 4.7K (1005)
R653	1-208-903-81 s	RES, CHIP 4.7K (1005)
R654	1-208-870-81 s	RES, CHIP 200 (1005)
R655	1-208-870-81 s	RES, CHIP 200 (1005)
R656	1-208-870-81 s	RES, CHIP 200 (1005)
R657	1-208-870-81 s	RES, CHIP 200 (1005)
R658	1-208-907-81 s	RES, CHIP 6.8K (1005)
R659	1-208-907-81 s	RES, CHIP 6.8K (1005)
R660	1-208-907-81 s	RES, CHIP 6.8K (1005)
R661	1-208-907-81 s	RES, CHIP 6.8K (1005)
R662	1-208-903-81 s	RES, CHIP 4.7K (1005)
R663	1-208-903-81 s	RES, CHIP 4.7K (1005)
R664	1-208-911-81 s	RES, CHIP 10K (1005)
R665	1-208-911-81 s	RES, CHIP 10K (1005)
R666	1-208-911-81 s	RES, CHIP 10K (1005)
R667	1-208-911-81 s	RES, CHIP 10K (1005)
R668	1-208-903-81 s	RES, CHIP 4.7K (1005)
R669	1-208-903-81 s	RES, CHIP 4.7K (1005)
R670	1-208-903-81 s	RES, CHIP 4.7K (1005)
R671	1-208-903-81 s	RES, CHIP 4.7K (1005)
R672	1-208-903-81 s	RES, CHIP 4.7K (1005)
R673	1-208-903-81 s	RES, CHIP 4.7K (1005)
R674	1-208-903-81 s	RES, CHIP 4.7K (1005)
R675	1-208-903-81 s	RES, CHIP 4.7K (1005)
R680	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R681	1-208-918-81 s	RES, CHIP 20K (1005)
R682	1-208-918-81 s	RES, CHIP 20K (1005)
R683	1-208-918-81 s	RES, CHIP 20K (1005)
R684	1-208-947-81 s	RES, CHIP 330K (1005)
R685	1-208-713-11 s	RES, CHIP 18K (1005)
R686	1-208-713-11 s	RES, CHIP 18K (1005)
R687	1-208-947-81 s	RES, CHIP 330K (1005)
R688	1-208-947-81 s	RES, CHIP 330K (1005)

AU-360 BOARD

Ref. No. or Q'ty	Part No.	SP Description
R689	1-208-947-81 s	RES, CHIP 330K (1005)
R690	1-208-886-81 s	RES, CHIP 910 (1005)
R691	1-208-886-81 s	RES, CHIP 910 (1005)
R692	1-208-713-11 s	RES, CHIP 18K (1005)
R693	1-208-713-11 s	RES, CHIP 18K (1005)
R694	1-208-918-81 s	RES, CHIP 20K (1005)
R695	1-208-886-81 s	RES, CHIP 910 (1005)
R696	1-208-886-81 s	RES, CHIP 910 (1005)
R697	1-208-935-81 s	RES, CHIP 100K (1005)
R698	1-218-827-91 s	RES, CHIP 150 (1608)
R699	1-218-827-91 s	RES, CHIP 150 (1608)
R700	1-218-827-91 s	RES, CHIP 150 (1608)
R701	1-218-827-91 s	RES, CHIP 150 (1608)
R702	1-208-903-81 s	RES, CHIP 4.7K (1005)
R703	1-208-856-81 s	RES, CHIP 51 (1005)
R704	1-208-856-81 s	RES, CHIP 51 (1005)
R705	1-208-935-81 s	RES, CHIP 100K (1005)
R706	1-208-935-81 s	RES, CHIP 100K (1005)
R707	1-208-935-81 s	RES, CHIP 100K (1005)
R708	1-208-935-81 s	RES, CHIP 100K (1005)
R709	1-208-856-81 s	RES, CHIP 51 (1005)
R710	1-208-887-81 s	RES, CHIP 1.0K (1005)
R711	1-208-887-81 s	RES, CHIP 1.0K (1005)
R712	1-208-887-81 s	RES, CHIP 1.0K (1005)
R713	1-208-887-81 s	RES, CHIP 1.0K (1005)
R714	1-208-935-81 s	RES, CHIP 100K (1005)
R715	1-208-935-81 s	RES, CHIP 100K (1005)
R716	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R717	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R720	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R800	1-208-855-81 s	RES, CHIP 47 (1005)
R801	1-208-855-81 s	RES, CHIP 47 (1005)
R802	1-208-855-81 s	RES, CHIP 47 (1005)
R803	1-208-855-81 s	RES, CHIP 47 (1005)
R804	1-220-870-81 s	RES, CHIP 10 (1005)
R805	1-220-870-81 s	RES, CHIP 10 (1005)
R806	1-208-855-81 s	RES, CHIP 47 (1005)
R807	1-208-855-81 s	RES, CHIP 47 (1005)
R808	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R809	1-208-903-81 s	RES, CHIP 4.7K (1005)
R810	1-218-947-11 s	RES, CHIP 330 (1005)
R811	1-208-903-81 s	RES, CHIP 4.7K (1005)
R812	1-208-903-81 s	RES, CHIP 4.7K (1005)
R813	1-208-899-81 s	RES, CHIP 3.3K (1005)
R814	1-208-899-81 s	RES, CHIP 3.3K (1005)
R816	1-208-903-81 s	RES, CHIP 4.7K (1005)
R817	1-208-899-81 s	RES, CHIP 3.3K (1005)
R818	1-208-935-81 s	RES, CHIP 100K (1005)
R819	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R821	1-218-941-81 s	RES, CHIP 100 (1005)
R823	1-218-941-81 s	RES, CHIP 100 (1005)
R900	1-208-911-81 s	RES, CHIP 10K (1005)
R901	1-208-911-81 s	RES, CHIP 10K (1005)
R902	1-208-903-81 s	RES, CHIP 4.7K (1005)
R903	1-208-903-81 s	RES, CHIP 4.7K (1005)
R904	1-218-985-11 s	RES, CHIP 470K (1005)
R905	1-218-985-11 s	RES, CHIP 470K (1005)
R906	1-218-985-11 s	RES, CHIP 470K (1005)
R907	1-218-985-11 s	RES, CHIP 470K (1005)
R908	1-220-870-81 s	RES, CHIP 10 (1005)
R909	1-220-870-81 s	RES, CHIP 10 (1005)
R910	1-218-985-11 s	RES, CHIP 470K (1005)
R911	1-218-985-11 s	RES, CHIP 470K (1005)
R912	1-218-985-11 s	RES, CHIP 470K (1005)
R913	1-218-985-11 s	RES, CHIP 470K (1005)

AU-360 BOARD

Ref. No. or Q'ty	Part No.	SP Description
R914	1-208-855-81 s	RES, CHIP 47 (1005)
R915	1-208-855-81 s	RES, CHIP 47 (1005)
R916	1-208-855-81 s	RES, CHIP 47 (1005)
R917	1-208-855-81 s	RES, CHIP 47 (1005)
R918	1-218-985-11 s	RES, CHIP 470K (1005)
R919	1-218-985-11 s	RES, CHIP 470K (1005)
R920	1-208-863-81 s	RES, CHIP 100 (1005)
R921	1-208-863-81 s	RES, CHIP 100 (1005)
R922	1-218-985-11 s	RES, CHIP 470K (1005)
R923	1-218-985-11 s	RES, CHIP 470K (1005)
R924	1-218-985-11 s	RES, CHIP 470K (1005)
R925	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R927	1-208-855-81 s	RES, CHIP 47 (1005)
R928	1-208-855-81 s	RES, CHIP 47 (1005)
R929	1-208-855-81 s	RES, CHIP 47 (1005)
R930	1-208-855-81 s	RES, CHIP 47 (1005)
R931	1-208-935-81 s	RES, CHIP 100K (1005)
R932	1-208-935-81 s	RES, CHIP 100K (1005)
R933	1-208-887-81 s	RES, CHIP 1.0K (1005)
R934	1-208-887-81 s	RES, CHIP 1.0K (1005)
R935	1-208-887-81 s	RES, CHIP 1.0K (1005)
R936	1-208-887-81 s	RES, CHIP 1.0K (1005)
R937	1-208-887-81 s	RES, CHIP 1.0K (1005)
R938	1-208-887-81 s	RES, CHIP 1.0K (1005)
R939	1-208-887-81 s	RES, CHIP 1.0K (1005)
R940	1-208-887-81 s	RES, CHIP 1.0K (1005)
R941	1-208-887-81 s	RES, CHIP 1.0K (1005)
R942	1-208-899-81 s	RES, CHIP 3.3K (1005)
R943	1-208-899-81 s	RES, CHIP 3.3K (1005)
R944	1-208-891-81 s	RES, CHIP 1.5K (1005)
R945	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R946	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R947	1-208-891-81 s	RES, CHIP 1.5K (1005)
R948	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R949	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R950	1-218-967-81 s	RES, CHIP 15K (1005)
R951	1-218-967-81 s	RES, CHIP 15K (1005)
R952	1-208-895-81 s	RES, CHIP 2.2K (1005)
R953	1-218-945-11 s	RES, CHIP 220 (1005)
R954	1-208-895-81 s	RES, CHIP 2.2K (1005)
R955	1-218-945-11 s	RES, CHIP 220 (1005)
R956	1-208-855-81 s	RES, CHIP 47 (1005)
R957	1-208-855-81 s	RES, CHIP 47 (1005)
R1000	1-208-903-81 s	RES, CHIP 4.7K (1005)
R1001	1-208-903-81 s	RES, CHIP 4.7K (1005)
R1003	1-220-878-81 s	RES, CHIP 22 (1005)
R1004	1-220-870-81 s	RES, CHIP 10 (1005)
R1005	1-218-949-11 s	RES, CHIP 470 (1005)
R1006	1-218-949-11 s	RES, CHIP 470 (1005)
R1007	1-208-927-81 s	RES, CHIP 47K (1005)
R1008	1-208-911-81 s	RES, CHIP 10K (1005)
R1009	1-208-911-81 s	RES, CHIP 10K (1005)
R1010	1-220-870-81 s	RES, CHIP 10 (1005)
R1011	1-220-870-81 s	RES, CHIP 10 (1005)
R1100	1-208-935-81 s	RES, CHIP 100K (1005)
R1102	1-208-943-81 s	RES, CHIP 220K (1005)
R1103	1-208-715-11 s	RES, CHIP 22K (1005)
R1104	1-208-902-81 s	RES, CHIP 4.3K (1005)
R1105	1-218-985-11 s	RES, CHIP 470K (1005)
R1106	1-218-985-11 s	RES, CHIP 470K (1005)
R1107	1-208-863-81 s	RES, CHIP 100 (1005)
R1108	1-250-547-11 s	RES,METAL FILM CHIP 150K(1005)
R1109	1-250-545-11 o	RES,METAL FILM CHIP 120K(1005)
R1110	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R1111	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)

AU-360 BOARD

Ref. No. or Q'ty	Part No.	SP Description
R1112	1-208-935-81 s	RES, CHIP 100K (1005)
R1113	1-208-911-81 s	RES, CHIP 10K (1005)
R1114	1-219-706-21 s	RES, CHIP (SQUARE TYPE) 0.10
R1115	1-208-715-11 s	RES, CHIP 22K (1005)
R1116	1-208-943-81 s	RES, CHIP 220K (1005)
R1117	1-208-903-81 s	RES, CHIP 4.7K (1005)
R1118	1-208-889-81 s	RES, CHIP 1.2K (1005)
R1119	1-220-870-81 s	RES, CHIP 10 (1005)
RB800	1-234-378-21 s	RES, NETWORK 10K (1005X4)
RB801	1-234-377-21 s	RES, NETWORK 4.7K (1005X4)
RB901	1-234-377-21 s	RES, NETWORK 4.7K (1005X4)
RB902	1-234-369-21 s	RES, NETWORK 10 (1005X4)
RB903	1-234-369-21 s	RES, NETWORK 10 (1005X4)
RB1000	1-234-380-21 s	RES, NETWORK 47K (1005X4)
RB1001	1-234-380-21 s	RES, NETWORK 47K (1005X4)
S800	1-771-709-31 s	SWITCH, SLIDE
X1000	1-813-511-11 s	OSCILLATOR, CRYSTAL (24MHZ)

AXM-52 BOARD

DET-60 board is included in AXM-52 board.

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-2057-067-A s	MOUNTED CIRCUIT BOARD, AXM-52
1pc	3-870-171-02 s	HOLDER, SENSOR
C101	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C102	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C103	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C104	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C105	1-114-214-81 s	CAP,CHIP CERAMIC470PF CH1005
C106	1-114-214-81 s	CAP,CHIP CERAMIC470PF CH1005
C107	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C108	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C109	1-114-214-81 s	CAP,CHIP CERAMIC470PF CH1005
C110	1-114-214-81 s	CAP,CHIP CERAMIC470PF CH1005
C111	1-114-214-81 s	CAP,CHIP CERAMIC470PF CH1005
C112	1-114-214-81 s	CAP,CHIP CERAMIC470PF CH1005
C113	1-114-214-81 s	CAP,CHIP CERAMIC470PF CH1005
C114	1-114-214-81 s	CAP,CHIP CERAMIC470PF CH1005
C115	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C116	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C117	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
CN101	1-573-594-23 s	CONNECTOR, XLR TYPE 3P
CN102	1-573-594-23 s	CONNECTOR, XLR TYPE 3P
CN103	1-774-795-11 s	CONNECTOR, XLR (RECEPTACLE) 5P
CN104	1-770-620-21 s	PIN, CONNECTOR 3P
CN105	1-817-054-21 s	PIN, CONNECTOR 6P
CN106	1-778-650-31 s	CONNECTOR, FFC/FPC(ZIF) ST 30P
CN107	1-770-623-21 s	PIN, CONNECTOR 6P
D101	8-719-077-09 s	DIODE CL-196HR-CD-T
FB103	1-481-377-21 s	FERRITE, EMI (SMD)
FB104	1-481-377-21 s	FERRITE, EMI (SMD)
FB105	1-481-377-21 s	FERRITE, EMI (SMD)
FB106	1-481-377-21 s	FERRITE, EMI (SMD)
FB107	1-400-461-21 s	FERRITE, EMI (SMD) (1005)
FB108	1-400-461-21 s	FERRITE, EMI (SMD) (1005)
FB109	1-400-461-21 s	FERRITE, EMI (SMD) (1005)
FB110	1-400-461-21 s	FERRITE, EMI (SMD) (1005)
FB113	1-400-461-21 s	FERRITE, EMI (SMD) (1005)

AXM-52 BOARD

Ref. No. or Q'ty	Part No.	SP Description
FB114	1-400-461-21 s	FERRITE, EMI (SMD) (1005)
FB115	1-400-461-21 s	FERRITE, EMI (SMD) (1005)
FB116	1-400-461-21 s	FERRITE, EMI (SMD) (1005)
IC101	6-704-931-01 s	IC MAX3281EAUT+T
IC102	6-704-931-01 s	IC MAX3281EAUT+T
R103	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R107	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R109	1-218-965-81 s	RES, CHIP 10K (1005)
R110	1-218-965-81 s	RES, CHIP 10K (1005)
R111	1-208-873-81 s	RES, CHIP 270 (1005)
R112	1-208-873-81 s	RES, CHIP 270 (1005)
R113	1-218-945-11 s	RES, CHIP 220 (1005)
R114	1-218-945-11 s	RES, CHIP 220 (1005)
R115	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R116	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R117	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R118	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R119	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R120	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R121	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R122	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R123	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R124	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R129	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R130	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R131	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R132	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R133	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R134	1-218-990-81 s	CONDUCTOR, CHIP (1005)
S101	1-572-042-11 s	SWITCH, SLIDE
S102	1-572-042-11 s	SWITCH, SLIDE

CI-50 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-2061-110-A s	MOUNTED CIRCUIT BOARD, CI-50
C1	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C2	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C3	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C4	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C5	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C6	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
CN1	1-764-243-31 o	CONNECTOR (COAXIAL)
CN2	1-764-243-31 o	CONNECTOR (COAXIAL)
CN3	1-820-982-11 s	CONNECTOR, COAXIAL 30P
IC1	6-711-497-01 s	IC TC74VCX541FK(EL)
IC2	6-711-497-01 s	IC TC74VCX541FK(EL)
IC3	8-759-183-53 s	IC TL431CPK-E2
R1	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R2	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R3	1-250-491-11 o	RES, METAL FILM CHIP 680(1005)
R6	1-218-990-81 s	CONDUCTOR, CHIP (1005)
RB1	1-234-381-21 s	RES, NETWORK 100K (1005X4)
RB2	1-234-381-21 s	RES, NETWORK 100K (1005X4)
RB3	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB4	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB5	1-234-381-21 s	RES, NETWORK 100K (1005X4)
RB6	1-234-371-21 s	RES, NETWORK 47 (1005X4)

CI-50 BOARD

Ref. No. or Q'ty	Part No.	SP Description
RB7	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB8	1-234-381-21 s	RES, NETWORK 100K (1005X4)

CN-3722 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-2057-508-A s	MOUNTED CIRCUIT BOARD, CN-3722
C001	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C002	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C003	1-116-705-11 s	CAP, CERAMIC 47MF X5R 3225
C004	1-116-705-11 s	CAP, CERAMIC 47MF X5R 3225
C005	1-116-705-11 s	CAP, CERAMIC 47MF X5R 3225
C006	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
CN001	1-820-806-21 o	CONNECTOR, COAXIAL(RECEPTACLE)
CN002	1-785-900-21 s	CONNECTOR 5P
CN003	1-842-675-13 s	USB CONNECTOR
FB001	1-400-580-21 s	FERRITE, EMI (SMD)
IC001	6-715-164-01 s	IC TPS2553DBVR
L001	1-457-223-11 s	COMMON MODE CHOKE COIL
R001	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R002	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R003	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R004	1-218-990-81 s	CONDUCTOR, CHIP (1005)
VDR001	1-802-245-11 s	ESD SUPPRESSOR
VDR002	1-802-245-11 s	ESD SUPPRESSOR

CN-3723 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-2057-509-A s	MOUNTED CIRCUIT BOARD, CN-3723
C1	1-128-608-91 s	CAP, CERAMIC 22PF CH (0603)
C2	1-128-608-91 s	CAP, CERAMIC 22PF CH (0603)
C3	1-128-608-91 s	CAP, CERAMIC 22PF CH (0603)
C4	1-128-608-91 s	CAP, CERAMIC 22PF CH (0603)
C5	1-128-608-91 s	CAP, CERAMIC 22PF CH (0603)
C6	1-128-608-91 s	CAP, CERAMIC 22PF CH (0603)
C7	1-128-608-91 s	CAP, CERAMIC 22PF CH (0603)
C8	1-128-608-91 s	CAP, CERAMIC 22PF CH (0603)
C9	1-128-608-91 s	CAP, CERAMIC 22PF CH (0603)
CN001	1-819-973-61 s	CONNECTOR, FPC (LIF) 12P
CN51	1-816-463-21 s	PIN, CONNECTOR (PC BOARD) 10P

CN-3736 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-2054-872-A s	MOUNTED CIRCUIT BOARD, CN-3736
C1	1-118-360-11 o	CAP, CERAMIC 0.1MF X7R 1608
CN1	1-816-041-12 s	CONNECTOR, ROUND TYPE 20P
CN2	1-779-772-21 s	CONNECTOR 13P

CN-3736 BOARD

Ref. No. or Q'ty	Part No.	SP Description
CN3	1-770-469-41 s	PIN, CONNECTOR (PC BOARD) 2P
FB1	1-469-108-21 s	FERRITE, EMI (SMD) (1608)
FB2	1-469-108-21 s	FERRITE, EMI (SMD) (1608)
FB3	1-469-108-21 s	FERRITE, EMI (SMD) (1608)
FB4	1-469-108-21 s	FERRITE, EMI (SMD) (1608)
FB5	1-469-108-21 s	FERRITE, EMI (SMD) (1608)
FB6	1-469-108-21 s	FERRITE, EMI (SMD) (1608)
FB7	1-469-108-21 s	FERRITE, EMI (SMD) (1608)
FB8	1-469-108-21 s	FERRITE, EMI (SMD) (1608)
FB9	1-469-108-21 s	FERRITE, EMI (SMD) (1608)
FB10	1-469-324-21 s	FERRITE, EMI (SMD) (2012)
FL1	1-482-155-11 s	SMD EMI FILTER
FL2	1-482-155-11 s	SMD EMI FILTER
FL3	1-482-155-11 s	SMD EMI FILTER

CN-3737 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-2054-862-A s	MOUNTED CIRCUIT BOARD, CN-3737
1pc	3-855-938-01 s	SCREW
C1	1-115-416-91 s	CAP,CHIP CERAMIC1000PF CH 1608
C2	1-115-416-91 s	CAP,CHIP CERAMIC1000PF CH 1608
C4	1-115-416-91 s	CAP,CHIP CERAMIC1000PF CH 1608
C5	1-115-416-91 s	CAP,CHIP CERAMIC1000PF CH 1608
C7	1-115-416-91 s	CAP,CHIP CERAMIC1000PF CH 1608
C8	1-115-416-91 s	CAP,CHIP CERAMIC1000PF CH 1608
C9	1-115-416-91 s	CAP,CHIP CERAMIC1000PF CH 1608
C10	1-115-416-91 s	CAP,CHIP CERAMIC1000PF CH 1608
CN1	1-793-027-21 s	CONNECTOR 14P
CN2	1-562-221-31 s	CONNECTOR (ROUND TYPE) (R-F)12P
FB1	1-414-445-21 s	FERRITE, EMI (SMD) (1608)
FB2	1-414-445-21 s	FERRITE, EMI (SMD) (1608)
FB4	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB5	1-414-445-21 s	FERRITE, EMI (SMD) (1608)
FB7	1-414-445-21 s	FERRITE, EMI (SMD) (1608)
FB8	1-414-445-21 s	FERRITE, EMI (SMD) (1608)
FB9	1-414-445-21 s	FERRITE, EMI (SMD) (1608)
FB10	1-414-445-21 s	FERRITE, EMI (SMD) (1608)
FB11	1-469-108-21 s	FERRITE, EMI (SMD) (1608)
FB12	1-469-108-21 s	FERRITE, EMI (SMD) (1608)
FL1	1-234-859-11 s	FILTER, EMI REMOVAL
FL2	1-234-859-11 s	FILTER, EMI REMOVAL
JC1	1-216-864-91 s	CONDUCTOR, CHIP (1608)
TH1	 1-802-108-11 s	THERMISTOR, POSITIVE

CN-3738 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-2058-420-A s	MOUNTED CIRCUIT BOARD, CN-3738
C1	1-118-407-11 o	CAP, CERAMIC 470PF X7R 1005
C2	1-118-407-11 o	CAP, CERAMIC 470PF X7R 1005
C3	1-118-407-11 o	CAP, CERAMIC 470PF X7R 1005
C4	1-118-407-11 o	CAP, CERAMIC 470PF X7R 1005
C5	1-118-407-11 o	CAP, CERAMIC 470PF X7R 1005
C6	1-118-407-11 o	CAP, CERAMIC 470PF X7R 1005

CN-3738 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C7	1-118-407-11 o	CAP, CERAMIC 470PF X7R 1005
C8	1-118-407-11 o	CAP, CERAMIC 470PF X7R 1005
CN1	1-784-602-11 s	CONNECTOR, XLR (RECEPTACLE) 5P
CN2	1-785-125-21 s	CONNECTOR 6P
ET1	1-780-569-11 s	TERMINAL (ON BOARD CONTACT)
FB1	1-400-461-21 s	FERRITE, EMI (SMD) (1005)
FB2	1-400-461-21 s	FERRITE, EMI (SMD) (1005)
FB3	1-400-461-21 s	FERRITE, EMI (SMD) (1005)
FB4	1-400-461-21 s	FERRITE, EMI (SMD) (1005)
FB5	1-400-461-21 s	FERRITE, EMI (SMD) (1005)

DCP-67 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-2063-283-A s	MOUNTED CIRCUIT BOARD, DCP-67
C100	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C101	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C102	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C103	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C104	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C105	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C109	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C110	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C111	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C112	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C113	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C114	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C118	1-114-548-11 s	CAP, NIOBIUM ELECT 22UF
C119	1-116-729-11 s	CAP, CERAMIC 2.2MF X5R 1608
C120	1-114-548-11 s	CAP, NIOBIUM ELECT 22UF
C121	1-116-729-11 s	CAP, CERAMIC 2.2MF X5R 1608
C122	1-114-548-11 s	CAP, NIOBIUM ELECT 22UF
C123	1-116-729-11 s	CAP, CERAMIC 2.2MF X5R 1608
C124	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C125	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C126	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C127	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C128	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C129	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C130	1-114-548-11 s	CAP, NIOBIUM ELECT 22UF
C131	1-114-548-11 s	CAP, NIOBIUM ELECT 22UF
C132	1-114-548-11 s	CAP, NIOBIUM ELECT 22UF
C133	1-164-850-81 s	CAP, CHIP CERAMIC 10PF CH 1005
C134	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C135	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C136	1-164-850-81 s	CAP, CHIP CERAMIC 10PF CH 1005
C137	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C138	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C139	1-164-850-81 s	CAP, CHIP CERAMIC 10PF CH 1005
C140	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C141	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C142	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C143	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C144	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C145	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C146	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C147	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C148	1-116-729-11 s	CAP, CERAMIC 2.2MF X5R 1608
C149	1-116-729-11 s	CAP, CERAMIC 2.2MF X5R 1608
C150	1-116-729-11 s	CAP, CERAMIC 2.2MF X5R 1608

DCP-67 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C600	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C601	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C602	1-116-350-21 s	CAP, CHIP CERAMIC 47UF B 2012
C603	1-164-866-81 s	CAP, CHIP CERAMIC 47PF CH 1005
C604	1-116-350-21 s	CAP, CHIP CERAMIC 47UF B 2012
C605	1-116-350-21 s	CAP, CHIP CERAMIC 47UF B 2012
C606	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C607	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C608	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C609	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C610	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C611	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C612	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C613	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C614	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C615	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C616	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C617	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C618	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C619	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C620	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C621	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C622	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C623	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C624	1-116-350-21 s	CAP, CHIP CERAMIC 47UF B 2012
C625	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C626	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C627	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C628	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C629	1-116-350-21 s	CAP, CHIP CERAMIC 47UF B 2012
C630	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C631	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C632	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C700	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C701	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C702	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C703	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C1103	1-114-548-11 s	CAP, NIOBIUM ELECT 22UF
C1104	1-116-729-11 s	CAP, CERAMIC 2.2MF X5R 1608
C1105	1-114-548-11 s	CAP, NIOBIUM ELECT 22UF
C1106	1-116-729-11 s	CAP, CERAMIC 2.2MF X5R 1608
C1107	1-114-548-11 s	CAP, NIOBIUM ELECT 22UF
C1108	1-116-729-11 s	CAP, CERAMIC 2.2MF X5R 1608
C1109	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C1110	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C1111	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C1112	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C1113	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C1114	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C1115	1-114-548-11 s	CAP, NIOBIUM ELECT 22UF
C1116	1-114-548-11 s	CAP, NIOBIUM ELECT 22UF
C1117	1-114-548-11 s	CAP, NIOBIUM ELECT 22UF
C1118	1-164-850-81 s	CAP, CHIP CERAMIC 10PF CH 1005
C1119	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C1120	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C1121	1-164-850-81 s	CAP, CHIP CERAMIC 10PF CH 1005
C1122	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C1123	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C1124	1-164-850-81 s	CAP, CHIP CERAMIC 10PF CH 1005
C1125	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C1126	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C1127	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C1128	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C1129	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C1130	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)

DCP-67 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C1131	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C1132	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C1133	1-116-729-11 s	CAP, CERAMIC 2.2MF X5R 1608
C1134	1-116-729-11 s	CAP, CERAMIC 2.2MF X5R 1608
C1135	1-116-729-11 s	CAP, CERAMIC 2.2MF X5R 1608
C1136	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C1137	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C1138	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C1145	1-114-548-11 s	CAP, NIOBIUM ELECT 22UF
C1146	1-114-548-11 s	CAP, NIOBIUM ELECT 22UF
C1147	1-114-548-11 s	CAP, NIOBIUM ELECT 22UF
C1148	1-114-548-11 s	CAP, NIOBIUM ELECT 22UF
C1149	1-114-548-11 s	CAP, NIOBIUM ELECT 22UF
C1150	1-114-548-11 s	CAP, NIOBIUM ELECT 22UF
C1151	1-114-548-11 s	CAP, NIOBIUM ELECT 22UF
C1152	1-114-548-11 s	CAP, NIOBIUM ELECT 22UF
C1153	1-114-548-11 s	CAP, NIOBIUM ELECT 22UF
C1154	1-114-548-11 s	CAP, NIOBIUM ELECT 22UF
C1155	1-114-548-11 s	CAP, NIOBIUM ELECT 22UF
C1156	1-114-548-11 s	CAP, NIOBIUM ELECT 22UF
CN200	1-580-789-21 s	PIN, CONNECTOR (SMD) 6P
CN201	1-822-974-11 s	CONNECTOR, COAXIAL 40P
CN500	1-784-254-21 s	CONNECTOR 10P
CN700	1-785-553-21 o	CONNECTOR, BOARD TO BOARD 120P
D200	8-719-083-60 s	DI UDZSUSTE-174.7B
D201	8-719-083-60 s	DI UDZSUSTE-174.7B
E700	1-535-877-22 s	CHIP, CHECKER
E701	1-535-877-22 s	CHIP, CHECKER
E702	1-535-877-22 s	CHIP, CHECKER
E703	1-535-877-22 s	CHIP, CHECKER
ET700	1-780-627-11 s	TERMINAL, LUG
ET701	1-780-627-11 s	TERMINAL, LUG
ET702	1-780-627-11 s	TERMINAL, LUG
ET703	1-780-627-11 s	TERMINAL, LUG
FB200	1-400-461-21 s	FERRITE, EMI (SMD) (1005)
FB201	1-400-461-21 s	FERRITE, EMI (SMD) (1005)
FB202	1-400-461-21 s	FERRITE, EMI (SMD) (1005)
FB203	1-400-461-21 s	FERRITE, EMI (SMD) (1005)
FB204	1-400-461-21 s	FERRITE, EMI (SMD) (1005)
FB205	1-400-461-21 s	FERRITE, EMI (SMD) (1005)
FB208	1-400-461-21 s	FERRITE, EMI (SMD) (1005)
FB300	1-400-461-21 s	FERRITE, EMI (SMD) (1005)
FB301	1-400-461-21 s	FERRITE, EMI (SMD) (1005)
FB400	1-400-461-21 s	FERRITE, EMI (SMD) (1005)
FB500	1-400-461-21 s	FERRITE, EMI (SMD) (1005)
FB501	1-400-461-21 s	FERRITE, EMI (SMD) (1005)
FB502	1-400-461-21 s	FERRITE, EMI (SMD) (1005)
FB600	1-400-580-21 s	FERRITE, EMI (SMD)
FB601	1-400-461-21 s	FERRITE, EMI (SMD) (1005)
FB602	1-400-580-21 s	FERRITE, EMI (SMD)
FB700	1-400-461-21 s	FERRITE, EMI (SMD) (1005)
IC100	8-759-561-46 s	IC AD8014ARTZ-REEL7
IC101	8-759-561-46 s	IC AD8014ARTZ-REEL7
IC102	8-759-561-46 s	IC AD8014ARTZ-REEL7
IC103	8-759-561-46 s	IC AD8014ARTZ-REEL7
IC104	8-759-561-46 s	IC AD8014ARTZ-REEL7
IC105	8-759-561-46 s	IC AD8014ARTZ-REEL7
IC106	6-711-361-01 s	IC LTC2249CUH#TR
IC107	6-711-361-01 s	IC LTC2249CUH#TR
IC108	6-711-361-01 s	IC LTC2249CUH#TR
IC109	8-759-561-46 s	IC AD8014ARTZ-REEL7
IC110	8-759-561-46 s	IC AD8014ARTZ-REEL7
IC111	8-759-561-46 s	IC AD8014ARTZ-REEL7
IC112	8-759-561-46 s	IC AD8014ARTZ-REEL7

DCP-67 BOARD

Ref. No. or Q'ty	Part No.	SP Description
IC113	8-759-561-46 s	IC AD8014ARTZ-REEL7
IC114	8-759-561-46 s	IC AD8014ARTZ-REEL7
IC115	6-711-361-01 s	IC LTC2249CUH#TR
IC116	6-711-361-01 s	IC LTC2249CUH#TR
IC117	6-711-361-01 s	IC LTC2249CUH#TR
IC200	8-759-675-54 s	IC TC7W53FK (TE85R)
IC201	8-759-675-54 s	IC TC7W53FK (TE85R)
IC202	8-759-675-54 s	IC TC7W53FK (TE85R)
IC203	8-759-675-54 s	IC TC7W53FK (TE85R)
IC204	8-759-675-54 s	IC TC7W53FK (TE85R)
IC205	8-759-675-54 s	IC TC7W53FK (TE85R)
IC207	8-759-672-76 s	IC AK9813BF-E2
IC208	6-715-041-01 s	IC TC7SZ125FU,RSOYJ
IC209	6-715-036-01 s	IC TC7SZ04FU,RSOYJ
IC210	6-704-976-01 s	IC ADR381ARTZ-REEL7
IC211	6-715-041-01 s	IC TC7SZ125FU,RSOYJ
IC212	6-715-041-01 s	IC TC7SZ125FU,RSOYJ
IC216	6-707-884-01 s	IC TC74VHCT04AFT(EKJ)
IC218	6-707-884-01 s	IC TC74VHCT04AFT(EKJ)
IC221	8-759-327-01 s	IC NJM062V(TE2)
IC222	6-715-041-01 s	IC TC7SZ125FU,RSOYJ
IC223	6-715-041-01 s	IC TC7SZ125FU,RSOYJ
IC224	6-704-099-01 s	IC TC7WZ08FK
IC225	6-704-099-01 s	IC TC7WZ08FK
IC226	6-704-099-01 s	IC TC7WZ08FK
IC227	8-759-338-95 s	IC NJM2903V(TE2)
IC231	8-759-327-01 s	IC NJM062V(TE2)
IC233	8-759-327-01 s	IC NJM062V(TE2)
IC234	8-759-327-01 s	IC NJM062V(TE2)
IC235	8-759-327-01 s	IC NJM062V(TE2)
IC236	6-704-976-01 s	IC ADR381ARTZ-REEL7
IC500	6-711-485-01 s	IC TC74VCX125FK(EL)
IC501	8-759-831-52 s	IC TC7WH125FK
IC502	6-706-487-01 s	IC TC7SH08FU
IC503	6-720-709-01 s	IC EPCQ128SI16N
IC506	6-715-036-01 s	IC TC7SZ04FU,RSOYJ
IC600	6-708-889-01 s	IC MP2105DJ-LF-Z
IC601	6-714-379-01 s	IC TPS62065DSGR
IC700	6-703-976-01 s	IC R1114Q181D-TR-FE
L600	1-457-526-11 s	INDUCTOR (2.2UH)
L601	1-457-852-11 s	COIL, CHOKE 1.2UH
Q200	8-729-927-99 s	TRANSISTOR 2SC4617TL-QR
Q202	8-729-927-99 s	TRANSISTOR 2SC4617TL-QR
Q203	8-729-927-99 s	TRANSISTOR 2SC4617TL-QR
Q204	8-729-927-99 s	TRANSISTOR 2SC4617TL-QR
Q205	6-550-631-01 s	TRANSISTOR 2SA1797-T100-Q
Q206	6-550-631-01 s	TRANSISTOR 2SA1797-T100-Q
Q207	6-550-631-01 s	TRANSISTOR 2SA1797-T100-Q
Q208	8-729-927-99 s	TRANSISTOR 2SC4617TL-QR
Q209	8-729-927-99 s	TRANSISTOR 2SC4617TL-QR
R100	1-250-491-11 o	RES, METAL FILM CHIP 680(1005)
R101	1-250-491-11 o	RES, METAL FILM CHIP 680(1005)
R102	1-250-491-11 o	RES, METAL FILM CHIP 680(1005)
R103	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R105	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R107	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R109	1-250-499-11 o	RES,METAL FILM CHIP 1.5K(1005)
R110	1-250-499-11 o	RES,METAL FILM CHIP 1.5K(1005)
R111	1-250-499-11 o	RES,METAL FILM CHIP 1.5K(1005)
R112	1-250-499-11 o	RES,METAL FILM CHIP 1.5K(1005)
R113	1-250-499-11 o	RES, METAL FILM CHIP 1.5K(1005)
R114	1-250-499-11 o	RES,METAL FILM CHIP 1.5K(1005)
R115	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R116	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)

DCP-67 BOARD

Ref. No. or Q'ty	Part No.	SP Description
R117	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R118	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R119	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R120	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R124	1-250-483-11 s	RES, METAL FILM CHIP 330(1005)
R125	1-250-483-11 s	RES, METAL FILM CHIP 330(1005)
R126	1-250-483-11 s	RES, METAL FILM CHIP 330(1005)
R127	1-250-483-11 s	RES, METAL FILM CHIP 330(1005)
R129	1-250-483-11 s	RES, METAL FILM CHIP 330(1005)
R131	1-250-483-11 s	RES, METAL FILM CHIP 330(1005)
R133	1-250-491-11 o	RES, METAL FILM CHIP 680(1005)
R134	1-250-491-11 o	RES, METAL FILM CHIP 680(1005)
R135	1-250-491-11 o	RES, METAL FILM CHIP 680(1005)
R137	1-250-479-11 o	RES, METAL FILM CHIP 220(1005)
R138	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R139	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R140	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R141	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R142	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R143	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R144	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R145	1-250-491-11 o	RES, METAL FILM CHIP 680(1005)
R146	1-250-491-11 o	RES, METAL FILM CHIP 680(1005)
R147	1-250-491-11 o	RES, METAL FILM CHIP 680(1005)
R148	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R150	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R152	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R154	1-250-499-11 o	RES,METAL FILM CHIP 1.5K(1005)
R155	1-250-499-11 o	RES,METAL FILM CHIP 1.5K(1005)
R156	1-250-499-11 o	RES,METAL FILM CHIP 1.5K(1005)
R157	1-250-499-11 o	RES,METAL FILM CHIP 1.5K(1005)
R158	1-250-499-11 o	RES,METAL FILM CHIP 1.5K(1005)
R159	1-250-499-11 o	RES,METAL FILM CHIP 1.5K(1005)
R160	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R161	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R162	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R163	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R164	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R165	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R169	1-250-483-11 s	RES, METAL FILM CHIP 330(1005)
R170	1-250-483-11 s	RES, METAL FILM CHIP 330(1005)
R171	1-250-483-11 s	RES, METAL FILM CHIP 330(1005)
R172	1-250-483-11 s	RES, METAL FILM CHIP 330(1005)
R174	1-250-483-11 s	RES, METAL FILM CHIP 330(1005)
R176	1-250-483-11 s	RES, METAL FILM CHIP 330(1005)
R178	1-250-491-11 o	RES, METAL FILM CHIP 680(1005)
R179	1-250-491-11 o	RES, METAL FILM CHIP 680(1005)
R180	1-250-491-11 o	RES, METAL FILM CHIP 680(1005)
R182	1-250-479-11 o	RES, METAL FILM CHIP 220(1005)
R183	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R184	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R185	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R186	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R187	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R188	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R189	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R200	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R201	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R202	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R203	1-250-487-11 s	RES, METAL FILM CHIP 470(1005)
R204	1-250-467-11 s	RES, METAL FILM CHIP 68 (1005)
R205	1-250-487-11 s	RES, METAL FILM CHIP 470(1005)
R206	1-250-467-11 s	RES, METAL FILM CHIP 68 (1005)
R207	1-250-487-11 s	RES, METAL FILM CHIP 470(1005)
R208	1-250-467-11 s	RES, METAL FILM CHIP 68 (1005)

DCP-67 BOARD

Ref. No. or Q'ty	Part No.	SP Description
R1123	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R1200	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R1201	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R1202	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R1203	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R1204	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R1205	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R1206	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R1209	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R1210	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R1211	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R1212	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R1213	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R1214	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R1215	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R1216	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R1217	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R1218	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R1219	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R1220	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R1221	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R1222	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R1225	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R1226	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R1227	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R1228	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R1229	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R1230	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R1231	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
RB500	1-234-378-21 s	RES, NETWORK 10K (1005X4)
RB501	1-234-375-21 s	RES, NETWORK 1K (1005X4)
TP200	1-535-757-21 s	CHIP, CHECKER
TP201	1-535-757-21 s	CHIP, CHECKER

DET-50 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1786-301-A s	MOUNTED CIRCUIT BOARD, DET-50
CN1	1-818-210-21 s	PIN, CONNECTOR 2P
S1	1-786-179-41 s	SWITCH, PUSH (1KEY)

DET-60 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C1	1-116-738-11 o	CAP, CERAMIC 1MF X6S 1005
C2	1-116-738-11 o	CAP, CERAMIC 1MF X6S 1005
C4	1-116-738-11 o	CAP, CERAMIC 1MF X6S 1005
CN1	1-817-054-21 s	PIN, CONNECTOR 6P
Q1	6-600-855-01 s	PHOTO TR RPM-012PBT97G
Q2	6-600-855-01 s	PHOTO TR RPM-012PBT97G
Q3	8-729-927-99 s	TRANSISTOR 2SC4617TL-QR
Q4	8-729-927-99 s	TRANSISTOR 2SC4617TL-QR
Q5	8-729-929-09 s	TRANSISTOR DTC123JE-TL
Q6	8-729-927-99 s	TRANSISTOR 2SC4617TL-QR

DET-60 BOARD

Ref. No. or Q'ty	Part No.	SP Description
Q7	8-729-927-99 s	TRANSISTOR 2SC4617TL-QR
R1	1-208-927-81 s	RES, CHIP 47K (1005)
R2	1-218-842-91 s	RES, CHIP 620 (1608)
R3	1-208-911-81 s	RES, CHIP 10K (1005)
R4	1-208-887-81 s	RES, CHIP 1.0K (1005)
R5	1-208-715-11 s	RES, CHIP 22K (1005)
R7	1-208-911-81 s	RES, CHIP 10K (1005)
R8	1-208-887-81 s	RES, CHIP 1.0K (1005)
R9	1-208-715-11 s	RES, CHIP 22K (1005)
R11	1-208-715-11 s	RES, CHIP 22K (1005)
R12	1-208-715-11 s	RES, CHIP 22K (1005)
R13	1-218-842-91 s	RES, CHIP 620 (1608)
R14	1-218-842-91 s	RES, CHIP 620 (1608)
R15	1-208-855-81 s	RES, CHIP 47 (1005)
R16	1-208-855-81 s	RES, CHIP 47 (1005)

DIF-232 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-2063-286-A s	MOUNTED CIRCUIT BOARD, DIF-232
C3	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C5	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C6	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C7	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C8	1-116-744-11 s	CAP, CERAMIC 0.22MF X5R 1005
C9	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C10	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C11	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C12	1-116-744-11 s	CAP, CERAMIC 0.22MF X5R 1005
C13	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C14	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C015	1-116-717-11 s	CAP, CERAMIC 10MF X5R 2012
C016	1-116-350-21 s	CAP, CHIP CERAMIC 47UF B 2012
C018	1-116-350-21 s	CAP, CHIP CERAMIC 47UF B 2012
C019	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005

C020	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C021	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C022	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C024	1-116-717-11 s	CAP, CERAMIC 10MF X5R 2012

CN001	1-822-974-11 s	CONNECTOR, COAXIAL 40P
CN002	1-844-006-11 s	CONNECTOR, HDMI

D001	8-719-056-48 s	DI 1SS388
D002	8-719-056-48 s	DI 1SS388

FL001	1-114-726-11 s	CAP, CHIP CERAMIC 27MF B 3216
FL002	1-114-726-11 s	CAP, CHIP CERAMIC 27MF B 3216

IC002	6-717-783-01 s	IC NJM2881F05 (TE1)
IC003	6-708-889-01 s	IC MP2105DJ-LF-Z
IC004	6-708-889-01 s	IC MP2105DJ-LF-Z

L001	1-813-308-11 o	COMMON MODE CHOKE
L002	1-813-308-11 o	COMMON MODE CHOKE
L003	1-813-308-11 o	COMMON MODE CHOKE
L004	1-813-308-11 o	COMMON MODE CHOKE
L005	1-481-992-11 s	INDUCTOR 1UH (2520)

L006	1-481-992-11 s	INDUCTOR 1UH (2520)
------	----------------	---------------------

R5	1-208-907-81 s	RES, CHIP 6.8K (1005)
R6	1-220-870-81 s	RES, CHIP 10 (1005)
R7	1-220-870-81 s	RES, CHIP 10 (1005)
R8	1-220-870-81 s	RES, CHIP 10 (1005)

DIF-232 BOARD

Ref. No. or Q'ty	Part No.	SP Description
R9	1-220-870-81 s	RES, CHIP 10 (1005)
R10	1-220-870-81 s	RES, CHIP 10 (1005)
R11	1-220-870-81 s	RES, CHIP 10 (1005)
R12	1-220-870-81 s	RES, CHIP 10 (1005)
R13	1-220-870-81 s	RES, CHIP 10 (1005)
R14	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R15	1-208-893-81 s	RES, CHIP 1.8K (1005)
R16	1-208-893-81 s	RES, CHIP 1.8K (1005)
R21	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R22	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R23	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R27	1-220-870-81 s	RES, CHIP 10 (1005)
R28	1-220-870-81 s	RES, CHIP 10 (1005)
R29	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R30	1-220-870-81 s	RES, CHIP 10 (1005)
R031	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R032	1-208-911-81 s	RES, CHIP 10K (1005)
R033	1-208-911-81 s	RES, CHIP 10K (1005)
R034	1-208-880-81 s	RES, CHIP 510 (1005)
R035	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R036	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R038	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R039	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R040	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R041	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R042	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R043	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R044	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R045	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R046	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R047	1-216-864-91 s	CONDUCTOR, CHIP (1608)
R048	1-216-864-91 s	CONDUCTOR, CHIP (1608)
R049	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R052	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R053	1-218-990-81 s	CONDUCTOR, CHIP (1005)

DPR-362 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-2063-285-A s	MOUNTED CIRCUIT BOARD, DPR-362
C0100	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C0103	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C0104	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C0110	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C0111	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C0112	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C0113	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C0205	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C0206	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C0207	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C0209	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C0301	1-164-842-81 s	CAP,CHIP CERAMIC 2.0PF CK 1005
C0302	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C0306	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C0307	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C0308	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C0309	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C0310	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C0311	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C0312	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C0314	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)

DPR-362 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C0315	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C0316	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C0317	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C0318	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C0319	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C0320	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C0321	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C0323	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C0324	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C0325	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C0326	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C0400	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C0401	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C0402	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C0403	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C0404	1-118-395-11 s	CAP, CERAMIC 4700PF X7R 1005
C0405	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C0406	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C0407	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C0408	1-118-403-11 s	CAP, CERAMIC 1000PF X7R 1005
C0409	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C0410	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C0411	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C0412	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C0413	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C0414	1-164-858-81 s	CAP, CHIP CERAMIC 22PF CH 1005
C0415	1-164-858-81 s	CAP, CHIP CERAMIC 22PF CH 1005
C0416	1-164-858-81 s	CAP, CHIP CERAMIC 22PF CH 1005
C0417	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C0418	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C0419	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C0420	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C0421	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C0422	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C0423	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C0424	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C0425	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C0426	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C0427	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C0428	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C0429	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C0430	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C0433	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C0434	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C0435	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C0436	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C0503	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C0505	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C0506	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C0604	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C0608	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C0609	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C0610	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C0611	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C0612	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C0701	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C0702	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C0703	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C0704	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C0705	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C0800	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C0801	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C0802	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C0803	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C0900	1-116-732-11 s	CAP, CERAMIC 2.2MF X5R 1005

DPR-362 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C0901	1-114-367-11 s	CAP, CERAMIC 0.1MF X6S 1005
C0904	1-114-367-11 s	CAP, CERAMIC 0.1MF X6S 1005
C0905	1-114-367-11 s	CAP, CERAMIC 0.1MF X6S 1005
C0906	1-114-367-11 s	CAP, CERAMIC 0.1MF X6S 1005
C0910	1-116-732-11 s	CAP, CERAMIC 2.2MF X5R 1005
C1000	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C1001	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C1002	1-118-397-11 s	CAP, CERAMIC 3300PF X7R 1005
C1003	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C1004	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C1005	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C1006	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C1007	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C1008	1-118-395-11 s	CAP, CERAMIC 4700PF X7R 1005
C1009	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C1010	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C1011	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C1012	1-164-866-81 s	CAP, CHIP CERAMIC 47PF CH 1005
C1013	1-116-506-91 s	CAP, CERAMIC 47UF X5R (2012)
C1014	1-116-506-91 s	CAP, CERAMIC 47UF X5R (2012)
C1015	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C1016	1-116-506-91 s	CAP, CERAMIC 47UF X5R (2012)
C1017	1-116-506-91 s	CAP, CERAMIC 47UF X5R (2012)
C1018	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C1019	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C1020	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C1034	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C1035	1-116-506-91 s	CAP, CERAMIC 47UF X5R (2012)
C1036	1-116-506-91 s	CAP, CERAMIC 47UF X5R (2012)
C1037	1-116-713-11 s	CAP, CERAMIC 22MF X5R 2012
C1039	1-116-713-11 s	CAP, CERAMIC 22MF X5R 2012
C1040	1-116-713-11 s	CAP, CERAMIC 22MF X5R 2012
C1041	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C1042	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C1043	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C1100	1-116-713-11 s	CAP, CERAMIC 22MF X5R 2012
C1101	1-116-713-11 s	CAP, CERAMIC 22MF X5R 2012
C1132	1-116-713-11 s	CAP, CERAMIC 22MF X5R 2012
C1150	1-116-713-11 s	CAP, CERAMIC 22MF X5R 2012
C1209	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C1212	1-116-713-11 s	CAP, CERAMIC 22MF X5R 2012
C1233	1-164-866-81 s	CAP, CHIP CERAMIC 47PF CH 1005
C1234	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C1235	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C1236	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C1237	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C1238	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C1239	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C1240	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C1241	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C1242	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C1243	1-164-866-81 s	CAP, CHIP CERAMIC 47PF CH 1005
C1244	1-164-866-81 s	CAP, CHIP CERAMIC 47PF CH 1005
C1245	1-116-506-91 s	CAP, CERAMIC 47UF X5R (2012)
C1246	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C1247	1-116-506-91 s	CAP, CERAMIC 47UF X5R (2012)
C1248	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C1300	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C1301	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C1304	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C1305	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C1500	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C1502	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C1601	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C1701	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608

DPR-362 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C1802	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C1803	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C1900	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C1920	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C1921	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C1923	1-116-713-11 s	CAP, CERAMIC 22MF X5R 2012
C1925	1-116-713-11 s	CAP, CERAMIC 22MF X5R 2012
C1927	1-164-866-81 s	CAP, CHIP CERAMIC 47PF CH 1005
C1928	1-116-713-11 s	CAP, CERAMIC 22MF X5R 2012
C1929	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C1930	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C1944	1-116-713-11 s	CAP, CERAMIC 22MF X5R 2012
C2001	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C2002	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C2003	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C2004	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C2005	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C2006	1-135-646-91 s	CAP, CHIP FILM 1MF
C2008	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C2009	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C2010	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C2011	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C2012	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C2013	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C2014	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C2015	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C2016	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C2017	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C2018	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C2019	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C2020	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C2021	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C2023	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C2024	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C2025	1-164-880-81 s	CAP,CHIP CERAMIC 180PF CH 1005
C2026	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C2027	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C2028	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C2029	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C2030	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C2031	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C2032	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C2033	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C2034	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C2035	1-116-713-11 s	CAP, CERAMIC 22MF X5R 2012
C2037	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C2038	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C2039	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C2040	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C2041	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C2042	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C2043	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C2044	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C2045	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C2046	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C2047	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C2048	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C2049	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C2100	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C2101	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C2102	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C2103	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C2104	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C2105	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C2106	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)

DPR-362 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C2633	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C2634	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C2635	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C2636	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C2700	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C2701	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C2702	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C2703	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C2704	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C2705	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C2706	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C2707	1-118-395-11 s	CAP, CERAMIC 4700PF X7R 1005
C2708	1-118-403-11 s	CAP, CERAMIC 1000PF X7R 1005
C2709	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C2710	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C2711	1-164-858-81 s	CAP, CHIP CERAMIC 22PF CH 1005
C2712	1-164-845-81 s	CAP, CHIP CERAMIC 5PF CH 1005
C2713	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C2714	1-164-858-81 s	CAP, CHIP CERAMIC 22PF CH 1005
C2715	1-164-858-81 s	CAP, CHIP CERAMIC 22PF CH 1005
C2716	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C2717	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C2718	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C2719	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C2720	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C2721	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C2722	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C2723	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C2724	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C2725	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C2726	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C2728	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C2800	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C2801	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C2802	1-116-713-11 s	CAP, CERAMIC 22MF X5R 2012
C2804	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C2805	1-116-713-11 s	CAP, CERAMIC 22MF X5R 2012
C2806	1-116-865-11 s	CAP, CERAMIC 10MF X5R 3216
C2807	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C2808	1-118-403-11 s	CAP, CERAMIC 1000PF X7R 1005
C2810	1-118-403-11 s	CAP, CERAMIC 1000PF X7R 1005
C2811	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C2813	1-164-858-81 s	CAP, CHIP CERAMIC 22PF CH 1005
C2814	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C2815	1-164-850-81 s	CAP, CHIP CERAMIC 10PF CH 1005
C2816	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C2817	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C2818	1-164-858-81 s	CAP, CHIP CERAMIC 22PF CH 1005
C3000	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C3002	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C3003	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C3005	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C3006	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C3007	1-118-395-11 s	CAP, CERAMIC 4700PF X7R 1005
C3010	1-118-399-11 s	CAP, CERAMIC 2200PF X7R 1005
C3012	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3013	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3014	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C3015	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C3016	1-116-713-11 s	CAP, CERAMIC 22MF X5R 2012
C3017	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C3018	1-118-403-11 s	CAP, CERAMIC 1000PF X7R 1005
C3019	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C3020	1-118-403-11 s	CAP, CERAMIC 1000PF X7R 1005
C3022	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)

DPR-362 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C3023	1-118-403-11 s	CAP, CERAMIC 1000PF X7R 1005
C3026	1-118-403-11 s	CAP, CERAMIC 1000PF X7R 1005
C3027	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C3030	1-118-403-11 s	CAP, CERAMIC 1000PF X7R 1005
C3031	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C3032	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C3033	1-116-713-11 s	CAP, CERAMIC 22MF X5R 2012
C3034	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C3035	1-118-403-11 s	CAP, CERAMIC 1000PF X7R 1005
C3037	1-118-403-11 s	CAP, CERAMIC 1000PF X7R 1005
C3039	1-118-403-11 s	CAP, CERAMIC 1000PF X7R 1005
C3040	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C3041	1-118-403-11 s	CAP, CERAMIC 1000PF X7R 1005
C3042	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C3043	1-118-403-11 s	CAP, CERAMIC 1000PF X7R 1005
C3044	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C3100	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C3101	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C3102	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3103	1-118-403-11 s	CAP, CERAMIC 1000PF X7R 1005
C3104	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C3105	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C3106	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C3107	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C3108	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C3109	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C3110	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C3111	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C3112	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C3301	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C3303	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C3305	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C3306	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C3307	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C3308	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C3309	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C3310	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C3312	1-164-850-81 s	CAP, CHIP CERAMIC 10PF CH 1005
C3313	1-164-850-81 s	CAP, CHIP CERAMIC 10PF CH 1005
C3404	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C3500	1-164-852-81 s	CAP, CHIP CERAMIC 12PF CH 1005
C3501	1-164-852-81 s	CAP, CHIP CERAMIC 12PF CH 1005
C3502	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C3503	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3508	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C3509	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C3510	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C3519	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C3520	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C3521	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C3600	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C3602	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C3605	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C3606	1-118-037-11 s	CAP, CERAMIC 0.22MF X5R (1608)
C3607	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C3608	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C3609	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3610	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3611	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3612	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3613	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C3614	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C3615	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3616	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3617	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)

DPR-362 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C3618	1-164-848-81 s	CAP, CHIP CERAMIC 8PF CH 1005
C3619	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C3620	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C3621	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3622	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3623	1-164-848-81 s	CAP, CHIP CERAMIC 8PF CH 1005
C3624	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3625	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3626	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3627	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3630	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C3631	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C3632	1-116-713-11 s	CAP, CERAMIC 22MF X5R 2012
C3633	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3634	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C3635	1-116-713-11 s	CAP, CERAMIC 22MF X5R 2012
C3636	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C3700	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C3702	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C3707	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C3708	1-116-713-11 s	CAP, CERAMIC 22MF X5R 2012
C3709	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C3712	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3713	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3714	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C3715	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C3716	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C3717	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C3718	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C3719	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C3720	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C3721	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C3722	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C3723	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C3724	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C3725	1-164-852-81 s	CAP, CHIP CERAMIC 12PF CH 1005
C3726	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C3727	1-164-852-81 s	CAP, CHIP CERAMIC 12PF CH 1005
C3728	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3729	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3732	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C3733	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C3734	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C3735	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C3736	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C3737	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C3738	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C3739	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C3740	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C3741	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C3742	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C3743	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C3744	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C3745	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C3746	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C3747	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C3748	1-131-661-21 s	CAP, CHIP ELECT 100MF (6.3X5.7)
C3749	1-131-661-21 s	CAP, CHIP ELECT 100MF (6.3X5.7)
C3750	1-131-661-21 s	CAP, CHIP ELECT 100MF (6.3X5.7)
C3751	1-118-037-11 s	CAP, CERAMIC 0.22MF X5R (1608)
C3752	1-164-854-81 s	CAP, CHIP CERAMIC 15PF CH 1005
C3753	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C3754	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C3806	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C3807	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)

DPR-362 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C3808	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C3809	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C3810	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C3811	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C3900	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C3904	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C4000	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C4001	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C4002	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C4003	1-116-713-11 s	CAP, CERAMIC 22MF X5R 2012
C4005	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C4006	1-114-569-11 s	CAP, CERAMIC 0.01MF X7R 1608
C4007	1-116-713-11 s	CAP, CERAMIC 22MF X5R 2012
C4010	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C4011	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C4012	1-114-569-11 s	CAP, CERAMIC 0.01MF X7R 1608
C4013	1-116-713-11 s	CAP, CERAMIC 22MF X5R 2012
C4014	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C4015	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C4017	1-114-570-11 s	CAP, CERAMIC 0.068MF X7R 1608
C4019	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C4021	1-114-569-11 s	CAP, CERAMIC 0.01MF X7R 1608
C4022	1-114-570-11 s	CAP, CERAMIC 0.068MF X7R 1608
C4023	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C4024	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C4025	1-114-570-11 s	CAP, CERAMIC 0.068MF X7R 1608
C4026	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C4027	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C4028	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C4030	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C4031	1-114-569-11 s	CAP, CERAMIC 0.01MF X7R 1608
C4032	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C4034	1-114-570-11 s	CAP, CERAMIC 0.068MF X7R 1608
C4035	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C4036	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C4037	1-116-713-11 s	CAP, CERAMIC 22MF X5R 2012
C4038	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C4039	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C4040	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C4045	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C4046	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C4047	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C4050	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C4057	1-116-713-11 s	CAP, CERAMIC 22MF X5R 2012
C4058	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C4059	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C4300	1-118-403-11 s	CAP, CERAMIC 1000PF X7R 1005
C4301	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C4302	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C4303	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C4304	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C4310	1-118-403-11 s	CAP, CERAMIC 1000PF X7R 1005
C4311	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C4312	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C4313	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C4314	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C4400	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C4401	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C4402	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C4403	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C4404	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C4405	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C4406	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C4502	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C4504	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)

DPR-362 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C4505	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C4600	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C4601	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C4602	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C4603	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C4604	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C4700	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C4800	1-164-848-81 s	CAP, CHIP CERAMIC 8PF CH 1005
C4801	1-164-848-81 s	CAP, CHIP CERAMIC 8PF CH 1005
C4802	1-164-848-81 s	CAP, CHIP CERAMIC 8PF CH 1005
C4803	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C4804	1-164-848-81 s	CAP, CHIP CERAMIC 8PF CH 1005
C4805	1-116-713-11 s	CAP, CERAMIC 22MF X5R 2012
C4806	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C4807	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C4808	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C4809	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C4810	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C4813	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C4818	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C4819	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C4820	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C4822	1-118-409-11 o	CAP, CERAMIC 330PF X7R 1005
C4823	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C4824	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C4827	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C4828	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C4829	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C4900	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C4901	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C4902	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C4903	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C5000	1-118-395-11 s	CAP, CERAMIC 4700PF X7R 1005
C5001	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C5002	1-118-395-11 s	CAP, CERAMIC 4700PF X7R 1005
C5003	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C5004	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C5005	1-116-713-11 s	CAP, CERAMIC 22MF X5R 2012
C5006	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C5007	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C5008	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C5009	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C5010	1-118-480-11 s	CAP, CERAMIC 4.7MF X5R 1608
C5011	1-164-854-81 s	CAP, CHIP CERAMIC 15PF CH 1005
C5012	1-164-854-81 s	CAP, CHIP CERAMIC 15PF CH 1005
C5015	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C5017	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C5018	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C5019	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C5020	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C5100	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C5101	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C5102	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C5103	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C5104	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C5105	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C5106	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C5107	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C5108	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C5200	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C5201	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C5202	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C5203	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C5300	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C5301	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)

DPR-362 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C5302	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C5303	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C5304	1-164-858-81 s	CAP, CHIP CERAMIC 22PF CH 1005
C5305	1-116-865-11 s	CAP, CERAMIC 10MF X5R 3216
C5306	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C5307	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C5309	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C5311	1-116-713-11 s	CAP, CERAMIC 22MF X5R 2012
C5314	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C5315	1-164-858-81 s	CAP, CHIP CERAMIC 22PF CH 1005
C5316	1-116-713-11 s	CAP, CERAMIC 22MF X5R 2012
CN0100	1-785-551-21 o	CONNECTOR, BOARD TO BOARD 120P
CN0102	1-794-376-21 s	PIN, CONNECTOR 4P
CN0300	1-822-974-11 s	CONNECTOR, COAXIAL 40P
CN0400	1-822-974-11 s	CONNECTOR, COAXIAL 40P
CN0800	1-785-551-21 o	CONNECTOR, BOARD TO BOARD 120P
CN2302	1-822-974-11 s	CONNECTOR, COAXIAL 40P
CN2303	1-820-806-21 o	CONNECTOR, COAXIAL (RECEPTACLE)
CN3900	1-794-376-21 s	PIN, CONNECTOR 4P
CN4500	1-843-413-11 s	CONNECTOR, USB (MICRO AB)
CN4800	1-794-376-21 s	PIN, CONNECTOR 4P
CN5201	1-822-974-11 s	CONNECTOR, COAXIAL 40P
CN5202	1-822-466-21 o	CONNECTOR, COAXIAL (RECEPTACLE)
CN5300	1-822-974-11 s	CONNECTOR, COAXIAL 40P
CN5301	1-793-331-31 s	CONNECTOR, FFC/FPC (LIF) 20P
CN5302	1-794-998-21 s	PIN, CONNECTOR 20P
D2000	8-719-024-71 s	DIODE 1SS362-TE85L
D2700	8-719-024-71 s	DIODE 1SS362-TE85L
D2800	8-719-024-71 s	DIODE 1SS362-TE85L
D2801	6-500-695-01 s	DI UDZSUSTE-172.7B
D2802	6-500-695-01 s	DI UDZSUSTE-172.7B
D2803	8-719-024-71 s	DIODE 1SS362-TE85L
D2804	8-719-024-71 s	DIODE 1SS362-TE85L
D2805	8-719-024-71 s	DIODE 1SS362-TE85L
D2806	8-719-024-71 s	DIODE 1SS362-TE85L
D2807	8-719-024-71 s	DIODE 1SS362-TE85L
D2808	8-719-024-71 s	DIODE 1SS362-TE85L
D3600	6-503-572-01 s	DI 1SS355VMTE-17
D3700	6-503-572-01 s	DI 1SS355VMTE-17
D5000	8-719-082-45 s	DIODE RB715W-TL
D5100	8-719-991-01 s	DIODE DAP222-TL
E5300	1-535-877-22 s	CHIP, CHECKER
E5301	1-535-877-22 s	CHIP, CHECKER
E5302	1-535-877-22 s	CHIP, CHECKER
E5303	1-535-877-22 s	CHIP, CHECKER
ET5300	1-780-627-11 s	TERMINAL, LUG
ET5301	1-780-627-11 s	TERMINAL, LUG
ET5302	1-780-627-11 s	TERMINAL, LUG
ET5303	1-780-627-11 s	TERMINAL, LUG
ET5304	1-854-133-11 s	TAP, THROUGH-HOLE
ET5305	1-854-133-11 s	TAP, THROUGH-HOLE
ET5306	1-854-133-11 s	TAP, THROUGH-HOLE
ET5307	1-854-133-11 s	TAP, THROUGH-HOLE
ET5308	1-854-133-11 s	TAP, THROUGH-HOLE
ET5309	1-854-135-11 s	TAP, THROUGH-HOLE
ET5310	1-854-135-11 s	TAP, THROUGH-HOLE
ET5311	1-854-135-11 s	TAP, THROUGH-HOLE
FB0300	1-400-824-21 s	EMI FERRITE (SMD) (1005)
FB0301	1-400-824-21 s	EMI FERRITE (SMD) (1005)
FB0302	1-400-824-21 s	EMI FERRITE (SMD) (1005)
FB0303	1-400-824-21 s	EMI FERRITE (SMD) (1005)
FB0304	1-400-824-21 s	EMI FERRITE (SMD) (1005)
FB0400	1-400-580-21 s	FERRITE, EMI (SMD)
FB0401	1-400-580-21 s	FERRITE, EMI (SMD)

DPR-362 BOARD

Ref. No. or Q'ty	Part No.	SP Description
FL1904	1-234-939-21 s	FILTER, EMI REMOVAL (SMD)
FL1905	1-234-939-21 s	FILTER, EMI REMOVAL (SMD)
FL1906	1-234-939-21 s	FILTER, EMI REMOVAL (SMD)
FL1907	1-234-939-21 s	FILTER, EMI REMOVAL (SMD)
FL3000	1-234-939-21 s	FILTER, EMI REMOVAL (SMD)
FL3001	1-234-939-21 s	FILTER, EMI REMOVAL (SMD)
FL3002	1-234-939-21 s	FILTER, EMI REMOVAL (SMD)
FL3003	1-234-939-21 s	FILTER, EMI REMOVAL (SMD)
FL3004	1-234-939-21 s	FILTER, EMI REMOVAL (SMD)
FL3005	1-234-939-21 s	FILTER, EMI REMOVAL (SMD)
FL3006	1-234-939-21 s	FILTER, EMI REMOVAL (SMD)
FL3007	1-234-939-21 s	FILTER, EMI REMOVAL (SMD)
FL3008	1-234-939-21 s	FILTER, EMI REMOVAL (SMD)
FL3300	1-234-939-21 s	FILTER, EMI REMOVAL (SMD)
FL4000	1-234-939-21 s	FILTER, EMI REMOVAL (SMD)
FL4001	1-234-939-21 s	FILTER, EMI REMOVAL (SMD)
FL4002	1-234-939-21 s	FILTER, EMI REMOVAL (SMD)
FL4003	1-234-939-21 s	FILTER, EMI REMOVAL (SMD)
FL4004	1-234-939-21 s	FILTER, EMI REMOVAL (SMD)
FL4005	1-234-939-21 s	FILTER, EMI REMOVAL (SMD)
FL4007	1-234-939-21 s	FILTER, EMI REMOVAL (SMD)
FL4008	1-234-939-21 s	FILTER, EMI REMOVAL (SMD)
FL4009	1-234-939-21 s	FILTER, EMI REMOVAL (SMD)
FL4010	1-234-939-21 s	FILTER, EMI REMOVAL (SMD)
FL4011	1-234-939-21 s	FILTER, EMI REMOVAL (SMD)
FL4012	1-234-939-21 s	FILTER, EMI REMOVAL (SMD)
FL4013	1-234-939-21 s	FILTER, EMI REMOVAL (SMD)
FL4014	1-234-939-21 s	FILTER, EMI REMOVAL (SMD)
FL4300	1-234-939-21 s	FILTER, EMI REMOVAL (SMD)
FL4301	1-234-939-21 s	FILTER, EMI REMOVAL (SMD)
FL4302	1-234-939-21 s	FILTER, EMI REMOVAL (SMD)
FL4303	1-234-939-21 s	FILTER, EMI REMOVAL (SMD)
FL4304	1-234-939-21 s	FILTER, EMI REMOVAL (SMD)
FL4305	1-234-939-21 s	FILTER, EMI REMOVAL (SMD)
FL4400	1-234-939-21 s	FILTER, EMI REMOVAL (SMD)
FL4800	1-234-939-21 s	FILTER, EMI REMOVAL (SMD)
FL4801	1-234-939-21 s	FILTER, EMI REMOVAL (SMD)
FL4802	1-234-939-21 s	FILTER, EMI REMOVAL (SMD)
FL4803	1-234-939-21 s	FILTER, EMI REMOVAL (SMD)
FL4804	1-234-939-21 s	FILTER, EMI REMOVAL (SMD)
FL4805	1-234-939-21 s	FILTER, EMI REMOVAL (SMD)
IC0101	6-703-977-01 s	IC R1114Q331D-TR-FE
IC0102	6-710-786-01 s	IC TC7SH125FU
IC0103	6-710-243-01 s	IC SN74AVC1T45DCKR
IC0300	6-711-497-01 s	IC TC74VCX541FK (EL)
IC0301	6-711-497-01 s	IC TC74VCX541FK (EL)
IC0302	6-710-243-01 s	IC SN74AVC1T45DCKR
IC0303	6-710-243-01 s	IC SN74AVC1T45DCKR
IC0304	6-711-497-01 s	IC TC74VCX541FK (EL)
IC0305	6-707-893-01 s	IC TC74VHCT541AFT (EKJ)
IC0307	6-711-751-01 s	IC THC63LVD103D
IC0308	6-711-485-01 s	IC TC74VCX125FK (EL)
IC0309	6-715-041-01 s	IC TC7S2125FU, RSOYJ
IC0310	6-715-036-01 s	IC TC7S204FU, RSOYJ
IC0311	6-706-476-01 s	IC TC7SET04FU
IC0401	6-706-484-01 s	IC TC7SH04FU
IC0403	6-707-997-01 s	IC ADV7320KSTZ
IC0404	6-708-464-01 o	IC R1114Q251D-TR-FE
IC0405	8-759-561-46 s	IC AD8014ARTZ-REEL7
IC0406	8-759-561-46 s	IC AD8014ARTZ-REEL7
IC0407	6-710-861-01 s	IC TC7SET34FU
IC0408	6-703-848-01 s	IC SN74CB3T3306DCUR
IC0409	6-703-848-01 s	IC SN74CB3T3306DCUR
IC0410	8-759-561-46 s	IC AD8014ARTZ-REEL7
IC0414	6-715-041-01 s	IC TC7S2125FU, RSOYJ

DPR-362 BOARD

Ref. No. or Q'ty	Part No.	SP Description
IC0415	6-712-135-01 o	IC R1173H001D-T1-FE
IC0416	6-711-497-01 s	IC TC74VCX541FK (EL)
IC0600	6-715-039-01 s	IC TC7S208FU, RSONYJ
IC0601	6-701-917-01 s	IC TC7PA34FU (TE85R)
IC0602	6-709-220-01 s	IC SN74AVC2T45DCUR
IC0603	6-701-917-01 s	IC TC7PA34FU (TE85R)
IC0604	6-711-497-01 s	IC TC74VCX541FK (EL)
IC0605	6-715-041-01 s	IC TC7S2125FU, RSOYJ
IC0607	6-704-555-01 o	IC TC7PA04FU (TE85R)
IC0608	6-706-484-01 s	IC TC7SH04FU
IC0609	6-711-497-01 s	IC TC74VCX541FK (EL)
IC0700	6-709-220-01 s	IC SN74AVC2T45DCUR
IC0701	6-703-238-01 s	IC TC7WZ34FK
IC0702	6-704-099-01 s	IC TC7WZ08FK
IC1001	6-703-976-01 s	IC R1114Q181D-TR-FE
IC1002	6-715-342-01 s	IC MM3404A25URE
IC1003	6-708-889-01 s	IC MP2105DJ-LF-Z
IC1004	6-708-889-01 s	IC MP2105DJ-LF-Z
IC1006	6-720-455-01 o	IC OZ8034
IC1100	8-753-404-05 o	IC CXD4236GG
IC1101	6-706-489-01 s	IC TC7SH32FU
IC1200	6-702-749-01 s	IC S-80928CNNB-G8YT2G
IC1201	6-715-039-01 s	IC TC7S208FU, RSONYJ
IC1202	6-720-455-01 o	IC OZ8034
IC1203	6-708-889-01 s	IC MP2105DJ-LF-Z
IC1206	6-703-976-01 s	IC R1114Q181D-TR-FE
IC1207	6-715-342-01 s	IC MM3404A25URE
IC1300	6-705-673-01 s	IC TC7PA53FU (TE85L.F)
IC1301	6-701-917-01 s	IC TC7PA34FU (TE85R)
IC1801	6-705-673-01 s	IC TC7PA53FU (TE85L.F)
IC1802	6-715-041-01 s	IC TC7S2125FU, RSOYJ
IC2000	8-759-561-46 s	IC AD8014ARTZ-REEL7
IC2001	8-759-561-46 s	IC AD8014ARTZ-REEL7
IC2002	6-716-910-01 s	IC LMH1983SQE
IC2003	6-715-164-01 s	IC TPS2553DBVR
IC2004	6-712-902-01 s	IC LMH1980MM
IC2005	6-712-135-01 o	IC R1173H001D-T1-FE
IC2006	6-712-135-01 o	IC R1173H001D-T1-FE
IC2007	6-717-747-01 s	IC LMP7711MK
IC2008	6-707-843-01 s	IC TC74LCX125FT (EKJ)
IC2101	6-707-415-01 s	IC DS90LT012ATMF
IC2102	6-707-415-01 s	IC DS90LT012ATMF
IC2103	6-708-464-01 o	IC R1114Q251D-TR-FE
IC2104	6-703-238-01 s	IC TC7WZ34FK
IC2105	6-715-041-01 s	IC TC7S2125FU, RSOYJ
IC2106	6-715-041-01 s	IC TC7S2125FU, RSOYJ
IC2107	6-715-039-01 s	IC TC7S208FU, RSONYJ
IC2108	6-701-917-01 s	IC TC7PA34FU (TE85R)
IC2109	6-707-415-01 s	IC DS90LT012ATMF
IC2110	6-700-831-01 s	IC TC7WZ74FK
IC2111	6-700-831-01 s	IC TC7WZ74FK
IC2112	6-715-039-01 s	IC TC7S208FU, RSONYJ
IC2113	6-715-039-01 s	IC TC7S208FU, RSONYJ
IC2114	6-715-041-01 s	IC TC7S2125FU, RSOYJ
IC2115	6-703-238-01 s	IC TC7WZ34FK
IC2117	6-712-342-01 s	IC CDCVF2310PWR
IC2118	6-707-414-01 s	IC DS90LV011ATMF
IC2201	6-707-843-01 s	IC TC74LCX125FT (EKJ)
IC2202	6-711-963-01 s	IC CY23EP09ZXC-1HT
IC2203	6-710-786-01 s	IC TC7SH125FU
IC2501	6-711-485-01 s	IC TC74VCX125FK (EL)
IC2502	8-759-831-52 s	IC TC7WH125FK
IC2504	6-708-889-01 s	IC MP2105DJ-LF-Z
IC2505	6-708-889-01 s	IC MP2105DJ-LF-Z
IC2600	6-708-889-01 s	IC MP2105DJ-LF-Z

DPR-362 BOARD

Ref. No. or Q'ty	Part No.	SP Description
IC2602	6-713-192-11 s	IC GS2978-CNTE3Z
IC2603	6-713-192-11 s	IC GS2978-CNTE3Z
IC2604	6-713-192-11 s	IC GS2978-CNTE3Z
IC2605	6-714-833-01 o	IC TPS2553DBVR-1
IC2606	6-714-833-01 o	IC TPS2553DBVR-1
IC2607	6-714-833-01 o	IC TPS2553DBVR-1
IC2700	6-707-997-01 s	IC ADV7320KSTZ
IC2701	6-708-464-01 o	IC R1114Q251D-TR-FE
IC2702	6-705-673-01 s	IC TC7PA53FU (TE85L.F)
IC2703	6-705-673-01 s	IC TC7PA53FU (TE85L.F)
IC2704	6-705-673-01 s	IC TC7PA53FU (TE85L.F)
IC2705	8-759-561-46 s	IC AD8014ARTZ-REEL7
IC2800	6-706-489-01 s	IC TC7SH32FU
IC2801	6-701-905-01 s	IC AM26C31CDBR
IC2802	8-759-278-58 s	IC NJM4558V-TE2
IC2803	8-759-338-95 s	IC NJM2903V (TE2)
IC2804	8-759-276-87 s	IC NJM4565M-A (TE2)
IC2805	6-706-487-01 s	IC TC7SH08FU
IC3001	6-717-739-01 s	IC MT47H128M16RT-25E
IC3003	6-717-739-01 s	IC MT47H128M16RT-25E
IC3100	6-711-485-01 s	IC TC74VCX125FK (EL)
IC3103	6-600-060-01 s	IC TC7WZ32FK
IC3104	6-715-041-01 s	IC TC7SZ125FU,RSOYJ
IC3300	6-714-421-01 s	IC UPD720101F1-EA8-E2-A
IC3400	6-715-659-01 s	IC PST8428UL
IC3500	6-720-457-01 s	IC PI6C557-05LEX
IC3501	6-720-456-01 s	IC PI6C20800SIAEX
IC3600	6-704-642-01 s	IC R3112N131A-TR-FE
IC3602	6-721-732-01 s	IC UPD720202K8-701-BAA-A
IC3603	6-708-889-01 s	IC MP2105DJ-LF-Z
IC3700	6-708-889-01 s	IC MP2105DJ-LF-Z
IC3702	6-704-642-01 s	IC R3112N131A-TR-FE
IC3703	6-721-731-01 s	IC ASM1061
IC3804	6-705-673-01 s	IC TC7PA53FU (TE85L.F)
IC3806	6-705-673-01 s	IC TC7PA53FU (TE85L.F)
IC3807	6-703-875-01 s	IC CDCVF2505PWR
IC3808	6-711-497-01 s	IC TC74VCX541FK (EL)
IC3900	6-715-039-01 s	IC TC7S208FU,RSOYJ
IC3901	6-715-039-01 s	IC TC7S208FU,RSOYJ
IC4000	6-708-889-01 s	IC MP2105DJ-LF-Z
IC4001	6-703-976-01 s	IC R1114Q181D-TR-FE
IC4500	6-716-783-01 s	IC BD11600NUX-E2
IC4501	6-715-040-01 o	IC TC7S232FU,RSOYJ
IC4600	6-708-478-01 s	IC RX-8025NB
IC4601	6-711-915-01 s	IC LM73CIMK-0
IC4602	6-720-893-01 s	IC M24256-BRMN6TP
IC4603	6-715-039-01 s	IC TC7S208FU,RSOYJ
IC4604	6-706-489-01 s	IC TC7SH32FU
IC4700	6-701-917-01 s	IC TC7PA34FU (TE85R)
IC4800	6-711-485-01 s	IC TC74VCX125FK (EL)
IC4801	6-715-039-01 s	IC TC7S208FU,RSOYJ
IC4900	6-706-484-01 s	IC TC7SH04FU
IC4901	6-703-848-01 s	IC SN74CB3T3306DCUR
IC4902	6-703-848-01 s	IC SN74CB3T3306DCUR
IC4904	6-715-041-01 s	IC TC7S2125FU,RSOYJ
IC5000	6-715-659-01 s	IC PST8428UL
IC5002	6-721-847-01 s	IC MB9AF004BGL-G-105-ERE1
IC5003	6-715-039-01 s	IC TC7S208FU,RSOYJ
IC5004	6-715-039-01 s	IC TC7S208FU,RSOYJ
IC5100	6-706-481-01 s	IC TC7SET32FU
IC5101	8-759-488-34 s	IC TLV2221CDBV
IC5102	6-706-476-01 s	IC TC7SET04FU
IC5103	6-706-484-01 s	IC TC7SH04FU
IC5104	6-706-481-01 s	IC TC7SET32FU
IC5200	6-715-164-01 s	IC TPS2553DBVR

DPR-362 BOARD

Ref. No. or Q'ty	Part No.	SP Description
IC5201	6-715-164-01 s	IC TPS2553DBVR
IC5301	8-759-569-92 s	IC NJM2370U09-TE2
IC5302	6-717-025-01 s	IC MM3404Z11NRE
IC5304	6-708-889-01 s	IC MP2105DJ-LF-Z
IC5305	6-704-099-01 s	IC TC7WZ08FK
J2600	1-764-243-31 o	CONNECTOR (COAXIAL)
J2601	1-764-243-31 o	CONNECTOR (COAXIAL)
J2602	1-764-243-31 o	CONNECTOR (COAXIAL)
L0400	1-481-175-21 s	INDUCTOR 4.7UH
L0401	1-412-979-41 s	INDUCTOR, SMALL TYPE 1.0UH
L0402	1-412-979-41 s	INDUCTOR, SMALL TYPE 1.0UH
L0403	1-412-979-41 s	INDUCTOR, SMALL TYPE 1.0UH
L1000	1-457-852-11 s	COIL, CHOKE 1.2UH
L1001	1-481-992-11 s	INDUCTOR 1UH (2520)
L1002	1-481-992-11 s	INDUCTOR 1UH (2520)
L1003	1-457-612-11 s	COIL, CHOKE 0.78UH
L1200	1-481-992-11 s	INDUCTOR 1UH (2520)
L1201	1-457-852-11 s	COIL, CHOKE 1.2UH
L1202	1-457-852-11 s	COIL, CHOKE 1.2UH
L1900	1-469-757-21 s	INDUCTOR 10UH (2012)
L1901	1-457-852-11 s	COIL, CHOKE 1.2UH
L2000	1-414-844-21 s	INDUCTOR, CHIP 22NH (1005)
L2001	1-469-555-21 s	INDUCTOR, CHIP 10UH (LB2016)
L2500	1-481-992-11 s	INDUCTOR 1UH (2520)
L2502	1-457-612-11 s	COIL, CHOKE 0.78UH
L2503	1-481-992-11 s	INDUCTOR 1UH (2520)
L2504	1-481-992-11 s	INDUCTOR 1UH (2520)
L2600	1-414-836-21 s	INDUCTOR, CHIP 4.7NH (1005)
L2601	1-414-836-21 s	INDUCTOR, CHIP 4.7NH (1005)
L2602	1-414-836-21 s	INDUCTOR, CHIP 4.7NH (1005)
L2604	1-481-992-11 s	INDUCTOR 1UH (2520)
L2700	1-469-555-21 s	INDUCTOR, CHIP 10UH (LB2016)
L2701	1-412-979-41 s	INDUCTOR, SMALL TYPE 1.0UH
L2702	1-412-987-41 s	INDUCTOR, SMALL TYPE 4.7UH
L2703	1-469-555-21 s	INDUCTOR, CHIP 10UH (LB2016)
L2704	1-469-555-21 s	INDUCTOR, CHIP 10UH (LB2016)
L2800	1-469-555-21 s	INDUCTOR, CHIP 10UH (LB2016)
L3600	1-481-992-11 s	INDUCTOR 1UH (2520)
L3700	1-481-992-11 s	INDUCTOR 1UH (2520)
L3701	1-460-473-11 s	INDUCTOR 4.7UH (2520)
L4000	1-481-992-11 s	INDUCTOR 1UH (2520)
L4500	1-481-265-21 s	COMMON MODE CHOKE COIL
L5300	1-457-852-11 s	COIL, CHOKE 1.2UH
L5301	1-481-992-11 s	INDUCTOR 1UH (2520)
L5303	1-457-852-11 s	COIL, CHOKE 1.2UH
PH2800	8-749-014-35 s	IC HCPL-0630-500
Q0300	6-550-750-01 s	TRANSISTOR SSM3K15FS-TE85L
Q0301	6-552-624-01 s	TR SI2301CDS-T1-GE3
Q0302	6-550-750-01 s	TRANSISTOR SSM3K15FS-TE85L
Q0303	6-552-624-01 s	TR SI2301CDS-T1-GE3
Q0400	8-729-928-19 s	TRANSISTOR 2SA1774TL-QR
Q0401	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q0402	8-729-927-99 s	TRANSISTOR 2SC4617TL-QR
Q0600	8-729-928-55 s	TRANSISTOR DTA123JE-TL
Q0900	8-729-929-09 s	TRANSISTOR DTC123JE-TL
Q1100	6-550-750-01 s	TRANSISTOR SSM3K15FS-TE85L
Q1101	6-550-750-01 s	TRANSISTOR SSM3K15FS-TE85L
Q1102	6-552-624-01 s	TR SI2301CDS-T1-GE3
Q1103	6-552-624-01 s	TR SI2301CDS-T1-GE3
Q1900	6-550-750-01 s	TRANSISTOR SSM3K15FS-TE85L
Q1901	6-552-624-01 s	TR SI2301CDS-T1-GE3
Q1902	6-552-624-01 s	TR SI2301CDS-T1-GE3
Q2000	8-729-928-55 s	TRANSISTOR DTA123JE-TL

DPR-362 BOARD

Ref. No. or Q'ty	Part No.	SP Description
Q2001	8-729-928-19 s	TRANSISTOR 2SA1774TL-QR
Q2002	8-729-927-99 s	TRANSISTOR 2SC4617TL-QR
Q2300	8-729-929-09 s	TRANSISTOR DTC123JE-TL
Q2301	8-729-929-09 s	TRANSISTOR DTC123JE-TL
Q2302	8-729-929-09 s	TRANSISTOR DTC123JE-TL
Q2700	8-729-928-19 s	TRANSISTOR 2SA1774TL-QR
Q2701	8-729-928-19 s	TRANSISTOR 2SA1774TL-QR
Q2702	8-729-927-99 s	TRANSISTOR 2SC4617TL-QR
Q2703	8-729-928-55 s	TRANSISTOR DTA123JE-TL
Q2800	6-550-750-01 s	TRANSISTOR SSM3K15FS-TE85L
Q3000	8-729-929-09 s	TRANSISTOR DTC123JE-TL
Q3100	6-550-750-01 s	TRANSISTOR SSM3K15FS-TE85L
Q3600	8-729-929-27 s	TRANSISTOR DTC114TE-TL
Q3601	8-729-929-27 s	TRANSISTOR DTC114TE-TL
Q3602	6-552-624-01 s	TR SI2301CDS-T1-GE3
Q3603	6-552-624-01 s	TR SI2301CDS-T1-GE3
Q3700	8-729-929-27 s	TRANSISTOR DTC114TE-TL
Q3701	6-552-624-01 s	TR SI2301CDS-T1-GE3
Q3702	8-729-929-27 s	TRANSISTOR DTC114TE-TL
Q3703	6-552-624-01 s	TR SI2301CDS-T1-GE3
Q4200	8-729-929-09 s	TRANSISTOR DTC123JE-TL
Q5001	6-552-624-01 s	TR SI2301CDS-T1-GE3
Q5002	8-729-929-27 s	TRANSISTOR DTC114TE-TL
Q5100	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q5200	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q5203	8-729-929-27 s	TRANSISTOR DTC114TE-TL
Q5300	8-729-929-09 s	TRANSISTOR DTC123JE-TL
R0100	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R0101	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R0102	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R0103	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R0104	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R0105	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R0107	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R0108	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R0109	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R0110	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R0111	1-218-933-81 s	RES, CHIP 22 (1005)
R0112	1-218-933-81 s	RES, CHIP 22 (1005)
R0113	1-218-933-81 s	RES, CHIP 22 (1005)
R0114	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R0201	1-250-488-11 s	RES, METAL FILM CHIP 510(1005)
R0203	1-250-488-11 s	RES, METAL FILM CHIP 510(1005)
R0204	1-218-933-81 s	RES, CHIP 22 (1005)
R0205	1-218-933-81 s	RES, CHIP 22 (1005)
R0300	1-218-933-81 s	RES, CHIP 22 (1005)
R0301	1-218-929-81 s	RES, CHIP 10 (1005)
R0302	1-218-933-81 s	RES, CHIP 22 (1005)
R0303	1-218-933-81 s	RES, CHIP 22 (1005)
R0304	1-250-513-11 o	RES,METAL FILM CHIP 5.6K(1005)
R0305	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R0306	1-250-523-11 o	RES, METAL FILM CHIP 15K(1005)
R0307	1-250-513-11 o	RES,METAL FILM CHIP 5.6K(1005)
R0308	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R0309	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R0310	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R0311	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R0312	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R0314	1-218-933-81 s	RES, CHIP 22 (1005)
R0400	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R0403	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R0404	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R0406	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R0407	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R0408	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)

DPR-362 BOARD

Ref. No. or Q'ty	Part No.	SP Description
R0409	1-250-491-11 o	RES, METAL FILM CHIP 680(1005)
R0410	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R0411	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R0412	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R0413	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R0414	1-250-507-11 o	RES,METAL FILM CHIP 3.3K(1005)
R0415	1-250-507-11 o	RES,METAL FILM CHIP 3.3K(1005)
R0416	1-250-507-11 o	RES,METAL FILM CHIP 3.3K(1005)
R0417	1-250-483-11 s	RES, METAL FILM CHIP 330(1005)
R0418	1-250-483-11 s	RES, METAL FILM CHIP 330(1005)
R0419	1-250-483-11 s	RES, METAL FILM CHIP 330(1005)
R0420	1-218-933-81 s	RES, CHIP 22 (1005)
R0421	1-218-933-81 s	RES, CHIP 22 (1005)
R0422	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R0423	1-250-481-11 s	RES, METAL FILM CHIP 270(1005)
R0424	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R0425	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R0426	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R0427	1-250-481-11 s	RES, METAL FILM CHIP 270(1005)
R0428	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R0429	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R0430	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R0431	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R0432	1-250-481-11 s	RES, METAL FILM CHIP 270(1005)
R0433	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R0434	1-250-481-11 s	RES, METAL FILM CHIP 270(1005)
R0435	1-250-468-11 s	RES, METAL FILM CHIP 75 (1005)
R0436	1-250-468-11 s	RES, METAL FILM CHIP 75 (1005)
R0437	1-218-933-81 s	RES, CHIP 22 (1005)
R0438	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R0439	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R0440	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R0441	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R0442	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R0443	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R0444	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R0445	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R0446	1-218-933-81 s	RES, CHIP 22 (1005)
R0447	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R0448	1-250-489-11 o	RES, METAL FILM CHIP 560(1005)
R0449	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R0450	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R0451	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R0452	1-250-487-11 s	RES, METAL FILM CHIP 470(1005)
R0453	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R0454	1-218-933-81 s	RES, CHIP 22 (1005)
R0455	1-218-933-81 s	RES, CHIP 22 (1005)
R0456	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R0457	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R0458	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R0460	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R0461	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R0462	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R0463	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R0464	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R0465	1-250-468-11 s	RES, METAL FILM CHIP 75 (1005)
R0466	1-694-535-91 s	CONDCTOR, CHIP (0603)
R0467	1-694-535-91 s	CONDCTOR, CHIP (0603)
R0468	1-694-535-91 s	CONDCTOR, CHIP (0603)
R0469	1-694-535-91 s	CONDCTOR, CHIP (0603)
R0470	1-694-535-91 s	CONDCTOR, CHIP (0603)
R0471	1-694-535-91 s	CONDCTOR, CHIP (0603)
R0472	1-694-535-91 s	CONDCTOR, CHIP (0603)
R0473	1-694-535-91 s	CONDCTOR, CHIP (0603)
R0474	1-694-535-91 s	CONDCTOR, CHIP (0603)

DPR-362 BOARD

Ref. No. or Q'ty	Part No.	SP Description
R0475	1-694-535-91 s	CONDUCTOR, CHIP (0603)
R0476	1-694-535-91 s	CONDUCTOR, CHIP (0603)
R0477	1-694-535-91 s	CONDUCTOR, CHIP (0603)
R0478	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R0479	1-250-525-11 s	RES, METAL FILM CHIP 18K(1005)
R0480	1-250-525-11 s	RES, METAL FILM CHIP 18K(1005)
R0481	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R0500	1-250-488-11 s	RES, METAL FILM CHIP 510(1005)
R0502	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R0503	1-218-933-81 s	RES, CHIP 22 (1005)
R0505	1-250-488-11 s	RES, METAL FILM CHIP 510(1005)
R0506	1-218-929-81 s	RES, CHIP 10 (1005)
R0600	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R0601	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R0603	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R0604	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R0609	1-218-933-81 s	RES, CHIP 22 (1005)
R0610	1-218-933-81 s	RES, CHIP 22 (1005)
R0611	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R0613	1-218-929-81 s	RES, CHIP 10 (1005)
R0614	1-218-929-81 s	RES, CHIP 10 (1005)
R0615	1-218-929-81 s	RES, CHIP 10 (1005)
R0616	1-218-933-81 s	RES, CHIP 22 (1005)
R0617	1-218-933-81 s	RES, CHIP 22 (1005)
R0618	1-218-933-81 s	RES, CHIP 22 (1005)
R0619	1-218-933-81 s	RES, CHIP 22 (1005)
R0621	1-218-933-81 s	RES, CHIP 22 (1005)
R0622	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R0700	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R0701	1-218-929-81 s	RES, CHIP 10 (1005)
R0702	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R0703	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R0704	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R0706	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R0707	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R0708	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R0709	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R0714	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R0716	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R0717	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R0718	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R0719	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R0720	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R0721	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R0801	1-250-488-11 s	RES, METAL FILM CHIP 510(1005)
R0803	1-250-488-11 s	RES, METAL FILM CHIP 510(1005)
R0805	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R0900	1-240-676-91 s	RES, CHIP 22 (0603)
R0901	1-240-676-91 s	RES, CHIP 22 (0603)
R0902	1-240-676-91 s	RES, CHIP 22 (0603)
R0903	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R0904	1-250-480-11 o	RES, METAL FILM CHIP 240(1005)
R0905	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R0906	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R0907	1-240-753-91 s	RES, CHIP 51 (0603)
R0908	1-240-753-91 s	RES, CHIP 51 (0603)
R0909	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R0910	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R0911	1-250-480-11 o	RES, METAL FILM CHIP 240(1005)
R0912	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R1000	1-250-515-11 s	RES,METAL FILM CHIP 6.8K(1005)
R1001	1-250-551-11 s	RES,METAL FILM CHIP 220K(1005)
R1002	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R1003	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R1004	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)

DPR-362 BOARD

Ref. No. or Q'ty	Part No.	SP Description
R1005	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R1006	1-250-545-11 o	RES,METAL FILM CHIP 120K(1005)
R1007	1-250-531-11 s	RES, METAL FILM CHIP 33K(1005)
R1008	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R1009	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R1010	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R1011	1-250-507-11 o	RES,METAL FILM CHIP 3.3K(1005)
R1012	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R1013	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R1014	1-250-551-11 s	RES,METAL FILM CHIP 220K(1005)
R1015	1-216-864-91 s	CONDUCTOR, CHIP (1608)
R1016	1-216-864-91 s	CONDUCTOR, CHIP (1608)
R1017	1-216-864-91 s	CONDUCTOR, CHIP (1608)
R1100	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R1101	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R1102	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R1103	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R1200	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R1201	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R1202	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R1203	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R1204	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R1205	1-250-545-11 o	RES,METAL FILM CHIP 120K(1005)
R1206	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R1207	1-250-545-11 o	RES,METAL FILM CHIP 120K(1005)
R1208	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R1209	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R1300	1-250-488-11 s	RES, METAL FILM CHIP 510(1005)
R1301	1-250-488-11 s	RES, METAL FILM CHIP 510(1005)
R1302	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R1303	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R1304	1-250-477-11 o	RES, METAL FILM CHIP 180(1005)
R1305	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R1307	1-694-535-91 s	CONDUCTOR, CHIP (0603)
R1308	1-694-535-91 s	CONDUCTOR, CHIP (0603)
R1309	1-694-535-91 s	CONDUCTOR, CHIP (0603)
R1310	1-694-535-91 s	CONDUCTOR, CHIP (0603)
R1311	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R1312	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R1315	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R1317	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R1319	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R1320	1-218-933-81 s	RES, CHIP 22 (1005)
R1321	1-218-933-81 s	RES, CHIP 22 (1005)
R1400	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R1401	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R1402	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R1404	1-218-933-81 s	RES, CHIP 22 (1005)
R1407	1-218-933-81 s	RES, CHIP 22 (1005)
R1408	1-218-933-81 s	RES, CHIP 22 (1005)
R1409	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R1501	1-250-475-11 s	RES, METAL FILM CHIP 150(1005)
R1503	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R1504	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R1701	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R1702	1-250-479-11 o	RES, METAL FILM CHIP 220(1005)
R1704	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R1705	1-218-933-81 s	RES, CHIP 22 (1005)
R1706	1-218-933-81 s	RES, CHIP 22 (1005)
R1800	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R1802	1-218-933-81 s	RES, CHIP 22 (1005)
R1805	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R1806	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R1807	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R1808	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)

DPR-362 BOARD

Ref. No. or Q'ty	Part No.	SP Description
R1809	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R1810	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R1811	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R1812	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R1813	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R1814	1-218-933-81 s	RES, CHIP 22 (1005)
R1815	1-218-933-81 s	RES, CHIP 22 (1005)
R1816	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R1817	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R1818	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R1819	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R1820	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R1821	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R1822	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R1823	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R1824	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R1825	1-218-933-81 s	RES, CHIP 22 (1005)
R1826	1-218-933-81 s	RES, CHIP 22 (1005)
R1827	1-218-933-81 s	RES, CHIP 22 (1005)
R1900	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R1901	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R1902	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R1903	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R1904	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R1905	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R1906	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R1907	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R1912	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R2000	1-250-468-11 s	RES, METAL FILM CHIP 75 (1005)
R2001	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R2002	1-218-933-81 s	RES, CHIP 22 (1005)
R2003	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R2005	1-218-933-81 s	RES, CHIP 22 (1005)
R2007	1-250-507-11 o	RES,METAL FILM CHIP 3.3K(1005)
R2012	1-218-933-81 s	RES, CHIP 22 (1005)
R2013	1-250-525-11 s	RES, METAL FILM CHIP 18K(1005)
R2014	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R2015	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R2017	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R2018	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R2022	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R2023	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R2024	1-250-475-11 s	RES, METAL FILM CHIP 150(1005)
R2026	1-250-475-11 s	RES, METAL FILM CHIP 150(1005)
R2027	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R2028	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R2029	1-218-933-81 s	RES, CHIP 22 (1005)
R2030	1-250-551-11 s	RES,METAL FILM CHIP 220K(1005)
R2031	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R2032	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R2033	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R2034	1-250-505-11 s	RES,METAL FILM CHIP 2.7K(1005)
R2035	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R2036	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R2037	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R2038	1-250-525-11 s	RES, METAL FILM CHIP 18K(1005)
R2039	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R2040	1-250-525-11 s	RES, METAL FILM CHIP 18K(1005)
R2041	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R2042	1-216-864-91 s	CONDUCTOR, CHIP (1608)
R2100	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R2101	1-218-933-81 s	RES, CHIP 22 (1005)
R2102	1-218-933-81 s	RES, CHIP 22 (1005)
R2103	1-218-933-81 s	RES, CHIP 22 (1005)
R2104	1-218-933-81 s	RES, CHIP 22 (1005)

DPR-362 BOARD

Ref. No. or Q'ty	Part No.	SP Description
R2105	1-218-933-81 s	RES, CHIP 22 (1005)
R2106	1-218-933-81 s	RES, CHIP 22 (1005)
R2107	1-218-933-81 s	RES, CHIP 22 (1005)
R2108	1-218-933-81 s	RES, CHIP 22 (1005)
R2109	1-218-933-81 s	RES, CHIP 22 (1005)
R2110	1-218-933-81 s	RES, CHIP 22 (1005)
R2111	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R2112	1-218-933-81 s	RES, CHIP 22 (1005)
R2114	1-218-933-81 s	RES, CHIP 22 (1005)
R2115	1-218-933-81 s	RES, CHIP 22 (1005)
R2116	1-218-933-81 s	RES, CHIP 22 (1005)
R2117	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R2118	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R2119	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R2120	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R2121	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R2122	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R2123	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R2124	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R2125	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R2126	1-218-933-81 s	RES, CHIP 22 (1005)
R2127	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R2200	1-218-933-81 s	RES, CHIP 22 (1005)
R2201	1-218-929-81 s	RES, CHIP 10 (1005)
R2202	1-218-933-81 s	RES, CHIP 22 (1005)
R2203	1-218-929-81 s	RES, CHIP 10 (1005)
R2204	1-218-929-81 s	RES, CHIP 10 (1005)
R2205	1-218-933-81 s	RES, CHIP 22 (1005)
R2207	1-218-933-81 s	RES, CHIP 22 (1005)
R2208	1-218-933-81 s	RES, CHIP 22 (1005)
R2209	1-218-929-81 s	RES, CHIP 10 (1005)
R2210	1-218-933-81 s	RES, CHIP 22 (1005)
R2211	1-218-929-81 s	RES, CHIP 10 (1005)
R2212	1-218-929-81 s	RES, CHIP 10 (1005)
R2213	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R2216	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R2217	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R2218	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R2219	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R2221	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R2222	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R2300	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R2302	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R2305	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R2306	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R2309	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R2310	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R2311	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R2312	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R2340	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R2344	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R2347	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R2351	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R2353	1-216-864-91 s	CONDUCTOR, CHIP (1608)
R2354	1-216-864-91 s	CONDUCTOR, CHIP (1608)
R2356	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R2357	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R2358	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R2359	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R2360	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R2361	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R2370	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R2372	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R2373	1-216-864-91 s	CONDUCTOR, CHIP (1608)
R2374	1-216-864-91 s	CONDUCTOR, CHIP (1608)

DPR-362 BOARD

Ref. No. or Q'ty	Part No.	SP Description
R2403	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R2404	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R2408	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R2411	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R2412	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R2421	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R2422	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R2423	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R2424	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R2429	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R2431	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R2432	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R2433	1-250-495-11 s	RES, METAL FILM CHIP 1.0K(1005)
R2500	1-250-507-11 o	RES, METAL FILM CHIP 3.3K(1005)
R2501	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R2502	1-250-511-11 o	RES, METAL FILM CHIP 4.7K(1005)
R2503	1-218-933-81 s	RES, CHIP 22 (1005)
R2504	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R2505	1-250-511-11 o	RES, METAL FILM CHIP 4.7K(1005)
R2506	1-250-543-11 o	RES, METAL FILM CHIP 100K(1005)
R2507	1-250-543-11 o	RES, METAL FILM CHIP 100K(1005)
R2508	1-250-543-11 o	RES, METAL FILM CHIP 100K(1005)
R2509	1-250-483-11 s	RES, METAL FILM CHIP 330(1005)
R2510	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R2511	1-250-531-11 s	RES, METAL FILM CHIP 33K(1005)
R2512	1-250-511-11 o	RES, METAL FILM CHIP 4.7K(1005)
R2515	1-250-503-11 o	RES, METAL FILM CHIP 2.2K(1005)
R2516	1-250-503-11 o	RES, METAL FILM CHIP 2.2K(1005)
R2517	1-250-503-11 o	RES, METAL FILM CHIP 2.2K(1005)
R2518	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R2519	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R2522	1-250-543-11 o	RES, METAL FILM CHIP 100K(1005)
R2523	1-250-543-11 o	RES, METAL FILM CHIP 100K(1005)
R2524	1-250-515-11 s	RES, METAL FILM CHIP 6.8K(1005)
R2525	1-250-551-11 s	RES, METAL FILM CHIP 220K(1005)
R2600	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R2601	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R2602	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R2604	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R2605	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R2606	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R2608	1-250-491-11 o	RES, METAL FILM CHIP 680(1005)
R2609	1-250-457-11 s	RES, METAL FILM CHIP 27 (1005)
R2610	1-250-491-11 o	RES, METAL FILM CHIP 680(1005)
R2611	1-250-457-11 s	RES, METAL FILM CHIP 27 (1005)
R2612	1-250-491-11 o	RES, METAL FILM CHIP 680(1005)
R2613	1-250-457-11 s	RES, METAL FILM CHIP 27 (1005)
R2620	1-250-468-11 s	RES, METAL FILM CHIP 75 (1005)
R2621	1-250-468-11 s	RES, METAL FILM CHIP 75 (1005)
R2622	1-250-468-11 s	RES, METAL FILM CHIP 75 (1005)
R2624	1-250-468-11 s	RES, METAL FILM CHIP 75 (1005)
R2625	1-250-468-11 s	RES, METAL FILM CHIP 75 (1005)
R2626	1-250-468-11 s	RES, METAL FILM CHIP 75 (1005)
R2628	1-250-468-11 s	RES, METAL FILM CHIP 75 (1005)
R2629	1-250-468-11 s	RES, METAL FILM CHIP 75 (1005)
R2630	1-250-468-11 s	RES, METAL FILM CHIP 75 (1005)
R2632	1-250-468-11 s	RES, METAL FILM CHIP 75 (1005)
R2633	1-250-468-11 s	RES, METAL FILM CHIP 75 (1005)
R2634	1-250-468-11 s	RES, METAL FILM CHIP 75 (1005)
R2636	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R2637	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R2638	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R2640	1-250-543-11 o	RES, METAL FILM CHIP 100K(1005)
R2641	1-250-511-11 o	RES, METAL FILM CHIP 4.7K(1005)
R2642	1-250-559-11 o	RES, METAL FILM CHIP 470K(1005)

DPR-362 BOARD

Ref. No. or Q'ty	Part No.	SP Description
R2644	1-250-551-11 s	RES, METAL FILM CHIP 220K(1005)
R2645	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R2647	1-250-551-11 s	RES, METAL FILM CHIP 220K(1005)
R2648	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R2650	1-250-551-11 s	RES, METAL FILM CHIP 220K(1005)
R2651	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R2652	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R2653	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R2654	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R2700	1-250-543-11 o	RES, METAL FILM CHIP 100K(1005)
R2701	1-250-505-11 s	RES, METAL FILM CHIP 2.7K(1005)
R2702	1-250-505-11 s	RES, METAL FILM CHIP 2.7K(1005)
R2703	1-250-491-11 o	RES, METAL FILM CHIP 680(1005)
R2704	1-250-483-11 s	RES, METAL FILM CHIP 330(1005)
R2705	1-250-483-11 s	RES, METAL FILM CHIP 330(1005)
R2706	1-250-483-11 s	RES, METAL FILM CHIP 330(1005)
R2707	1-250-483-11 s	RES, METAL FILM CHIP 330(1005)
R2708	1-250-507-11 o	RES, METAL FILM CHIP 3.3K(1005)
R2709	1-250-507-11 o	RES, METAL FILM CHIP 3.3K(1005)
R2710	1-250-483-11 s	RES, METAL FILM CHIP 330(1005)
R2711	1-250-483-11 s	RES, METAL FILM CHIP 330(1005)
R2712	1-218-933-81 s	RES, CHIP 22 (1005)
R2713	1-218-933-81 s	RES, CHIP 22 (1005)
R2714	1-250-511-11 o	RES, METAL FILM CHIP 4.7K(1005)
R2715	1-250-511-11 o	RES, METAL FILM CHIP 4.7K(1005)
R2716	1-218-933-81 s	RES, CHIP 22 (1005)
R2717	1-250-511-11 o	RES, METAL FILM CHIP 4.7K(1005)
R2718	1-218-933-81 s	RES, CHIP 22 (1005)
R2719	1-250-495-11 s	RES, METAL FILM CHIP 1.0K(1005)
R2720	1-250-513-11 o	RES, METAL FILM CHIP 5.6K(1005)
R2721	1-250-495-11 s	RES, METAL FILM CHIP 1.0K(1005)
R2722	1-250-513-11 o	RES, METAL FILM CHIP 5.6K(1005)
R2723	1-250-468-11 s	RES, METAL FILM CHIP 75 (1005)
R2724	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R2725	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R2726	1-250-511-11 o	RES, METAL FILM CHIP 4.7K(1005)
R2727	1-250-468-11 s	RES, METAL FILM CHIP 75 (1005)
R2800	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R2801	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R2803	1-250-505-11 s	RES, METAL FILM CHIP 2.7K(1005)
R2805	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R2806	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R2807	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R2808	1-250-511-11 o	RES, METAL FILM CHIP 4.7K(1005)
R2809	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R2810	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R2811	1-250-511-11 o	RES, METAL FILM CHIP 4.7K(1005)
R2812	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R2813	1-250-543-11 o	RES, METAL FILM CHIP 100K(1005)
R2814	1-250-503-11 o	RES, METAL FILM CHIP 2.2K(1005)
R2815	1-250-511-11 o	RES, METAL FILM CHIP 4.7K(1005)
R2816	1-250-511-11 o	RES, METAL FILM CHIP 4.7K(1005)
R2818	1-250-543-11 o	RES, METAL FILM CHIP 100K(1005)
R2819	1-250-495-11 s	RES, METAL FILM CHIP 1.0K(1005)
R2821	1-250-511-11 o	RES, METAL FILM CHIP 4.7K(1005)
R2822	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R2823	1-250-543-11 o	RES, METAL FILM CHIP 100K(1005)
R2824	1-218-929-81 s	RES, CHIP 10 (1005)
R2825	1-218-929-81 s	RES, CHIP 10 (1005)
R2826	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R2827	1-250-543-11 o	RES, METAL FILM CHIP 100K(1005)
R2828	1-250-503-11 o	RES, METAL FILM CHIP 2.2K(1005)
R2829	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R2830	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R2831	1-250-543-11 o	RES, METAL FILM CHIP 100K(1005)

DPR-362 BOARD

Ref. No. or Q'ty	Part No.	SP Description
R2832	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R2900	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R2901	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R2903	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R2905	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R2906	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R2907	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R2908	1-218-933-81 s	RES, CHIP 22 (1005)
R2909	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R2910	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R2911	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R2912	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R2913	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R2914	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R3000	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R3003	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R3004	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R3006	1-218-933-81 s	RES, CHIP 22 (1005)
R3007	1-218-933-81 s	RES, CHIP 22 (1005)
R3008	1-218-933-81 s	RES, CHIP 22 (1005)
R3010	1-218-933-81 s	RES, CHIP 22 (1005)
R3011	1-218-933-81 s	RES, CHIP 22 (1005)
R3012	1-218-933-81 s	RES, CHIP 22 (1005)
R3013	1-218-933-81 s	RES, CHIP 22 (1005)
R3014	1-218-933-81 s	RES, CHIP 22 (1005)
R3015	1-218-933-81 s	RES, CHIP 22 (1005)
R3016	1-218-933-81 s	RES, CHIP 22 (1005)
R3017	1-218-933-81 s	RES, CHIP 22 (1005)
R3018	1-218-933-81 s	RES, CHIP 22 (1005)
R3019	1-218-933-81 s	RES, CHIP 22 (1005)
R3020	1-218-933-81 s	RES, CHIP 22 (1005)
R3021	1-218-933-81 s	RES, CHIP 22 (1005)
R3022	1-218-933-81 s	RES, CHIP 22 (1005)
R3023	1-218-933-81 s	RES, CHIP 22 (1005)
R3024	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R3025	1-218-933-81 s	RES, CHIP 22 (1005)
R3026	1-218-933-81 s	RES, CHIP 22 (1005)
R3027	1-218-933-81 s	RES, CHIP 22 (1005)
R3028	1-218-933-81 s	RES, CHIP 22 (1005)
R3029	1-218-933-81 s	RES, CHIP 22 (1005)
R3030	1-218-933-81 s	RES, CHIP 22 (1005)
R3031	1-218-933-81 s	RES, CHIP 22 (1005)
R3032	1-218-933-81 s	RES, CHIP 22 (1005)
R3033	1-250-475-11 s	RES, METAL FILM CHIP 150(1005)
R3034	1-250-475-11 s	RES, METAL FILM CHIP 150(1005)
R3039	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R3041	1-250-475-11 s	RES, METAL FILM CHIP 150(1005)
R3042	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R3043	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R3044	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R3045	1-250-475-11 s	RES, METAL FILM CHIP 150(1005)
R3046	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R3047	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R3100	1-250-500-11 s	RES,METAL FILM CHIP 1.6K(1005)
R3102	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R3103	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R3104	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R3105	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R3106	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R3107	1-218-933-81 s	RES, CHIP 22 (1005)
R3108	1-218-933-81 s	RES, CHIP 22 (1005)
R3109	1-218-933-81 s	RES, CHIP 22 (1005)
R3110	1-250-461-11 s	RES, METAL FILM CHIP 39 (1005)
R3111	1-250-461-11 s	RES, METAL FILM CHIP 39 (1005)
R3112	1-250-499-11 o	RES,METAL FILM CHIP 1.5K(1005)

DPR-362 BOARD

Ref. No. or Q'ty	Part No.	SP Description
R3113	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R3114	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R3115	1-250-523-11 o	RES, METAL FILM CHIP 15K(1005)
R3116	1-250-517-11 s	RES,METAL FILM CHIP 8.2K(1005)
R3117	1-218-933-81 s	RES, CHIP 22 (1005)
R3118	1-218-933-81 s	RES, CHIP 22 (1005)
R3200	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R3201	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R3202	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R3300	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R3301	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R3302	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R3303	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R3305	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R3317	1-250-464-11 s	RES, METAL FILM CHIP 51 (1005)
R3318	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R3319	1-250-523-11 o	RES, METAL FILM CHIP 15K(1005)
R3320	1-250-523-11 o	RES, METAL FILM CHIP 15K(1005)
R3321	1-250-523-11 o	RES, METAL FILM CHIP 15K(1005)
R3322	1-250-523-11 o	RES, METAL FILM CHIP 15K(1005)
R3323	1-250-523-11 o	RES, METAL FILM CHIP 15K(1005)
R3324	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R3325	1-250-523-11 o	RES, METAL FILM CHIP 15K(1005)
R3326	1-250-523-11 o	RES, METAL FILM CHIP 15K(1005)
R3327	1-250-523-11 o	RES, METAL FILM CHIP 15K(1005)
R3328	1-250-523-11 o	RES, METAL FILM CHIP 15K(1005)
R3329	1-250-523-11 o	RES, METAL FILM CHIP 15K(1005)
R3401	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R3436	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R3438	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R3504	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R3505	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R3510	1-208-879-81 s	RES, CHIP 470 (1005)
R3511	1-220-803-81 s	RES, CHIP 4.7 (1005)
R3512	1-245-567-81 s	RES, CHIP 49.9 (1005)
R3513	1-245-567-81 s	RES, CHIP 49.9 (1005)
R3514	1-245-567-81 s	RES, CHIP 49.9 (1005)
R3515	1-245-567-81 s	RES, CHIP 49.9 (1005)
R3516	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R3517	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R3518	1-245-567-81 s	RES, CHIP 49.9 (1005)
R3519	1-245-567-81 s	RES, CHIP 49.9 (1005)
R3520	1-245-567-81 s	RES, CHIP 49.9 (1005)
R3521	1-245-567-81 s	RES, CHIP 49.9 (1005)
R3522	1-245-567-81 s	RES, CHIP 49.9 (1005)
R3523	1-245-567-81 s	RES, CHIP 49.9 (1005)
R3524	1-245-567-81 s	RES, CHIP 49.9 (1005)
R3525	1-245-567-81 s	RES, CHIP 49.9 (1005)
R3526	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R3535	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R3536	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R3537	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R3538	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R3539	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R3540	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R3541	1-208-879-81 s	RES, CHIP 470 (1005)
R3542	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R3543	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R3544	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R3545	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R3546	1-220-803-81 s	RES, CHIP 4.7 (1005)
R3547	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R3556	1-245-567-81 s	RES, CHIP 49.9 (1005)
R3557	1-245-567-81 s	RES, CHIP 49.9 (1005)
R3558	1-245-567-81 s	RES, CHIP 49.9 (1005)

DPR-362 BOARD

Ref. No. or Q'ty	Part No.	SP Description
R3559	1-245-567-81 s	RES, CHIP 49.9 (1005)
R3560	1-245-567-81 s	RES, CHIP 49.9 (1005)
R3561	1-245-567-81 s	RES, CHIP 49.9 (1005)
R3562	1-245-567-81 s	RES, CHIP 49.9 (1005)
R3563	1-245-567-81 s	RES, CHIP 49.9 (1005)
R3600	1-250-547-11 s	RES,METAL FILM CHIP 150K(1005)
R3602	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R3603	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R3604	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R3605	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R3606	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R3607	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R3608	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R3609	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R3610	1-250-493-11 o	RES, METAL FILM CHIP 820(1005)
R3611	1-250-500-11 s	RES,METAL FILM CHIP 1.6K(1005)
R3612	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R3613	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R3614	1-250-547-11 s	RES,METAL FILM CHIP 150K(1005)
R3616	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R3617	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R3618	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R3619	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R3700	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R3703	1-250-517-11 s	RES,METAL FILM CHIP 8.2K(1005)
R3704	1-250-509-11 o	RES,METAL FILM CHIP 3.9K(1005)
R3705	1-250-547-11 s	RES,METAL FILM CHIP 150K(1005)
R3706	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R3707	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R3708	1-250-517-11 s	RES,METAL FILM CHIP 8.2K(1005)
R3709	1-250-509-11 o	RES,METAL FILM CHIP 3.9K(1005)
R3710	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R3712	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R3713	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R3714	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R3715	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R3721	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R3722	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R3723	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R3724	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R3725	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R3726	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R3727	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R3728	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R3730	1-250-567-11 s	RES, METAL FILM CHIP 1M (1005)
R3801	1-218-933-81 s	RES, CHIP 22 (1005)
R3804	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R3805	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R3808	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R3812	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R3814	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R3817	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R3818	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R3819	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R3820	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R3823	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R3825	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R3826	1-218-933-81 s	RES, CHIP 22 (1005)
R3827	1-218-933-81 s	RES, CHIP 22 (1005)
R3828	1-218-933-81 s	RES, CHIP 22 (1005)
R3829	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R3831	1-218-933-81 s	RES, CHIP 22 (1005)
R3832	1-218-933-81 s	RES, CHIP 22 (1005)
R3833	1-218-933-81 s	RES, CHIP 22 (1005)
R3834	1-218-933-81 s	RES, CHIP 22 (1005)

DPR-362 BOARD

Ref. No. or Q'ty	Part No.	SP Description
R3835	1-218-933-81 s	RES, CHIP 22 (1005)
R3836	1-218-933-81 s	RES, CHIP 22 (1005)
R3837	1-218-933-81 s	RES, CHIP 22 (1005)
R3838	1-218-933-81 s	RES, CHIP 22 (1005)
R3900	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R3901	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R3902	1-218-949-11 s	RES, CHIP 470 (1005)
R3903	1-218-933-81 s	RES, CHIP 22 (1005)
R3904	1-218-933-81 s	RES, CHIP 22 (1005)
R3905	1-218-933-81 s	RES, CHIP 22 (1005)
R3906	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R3907	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R3908	1-218-933-81 s	RES, CHIP 22 (1005)
R3909	1-218-933-81 s	RES, CHIP 22 (1005)
R3910	1-218-949-11 s	RES, CHIP 470 (1005)
R3911	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R3912	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R3915	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R3916	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R3918	1-218-933-81 s	RES, CHIP 22 (1005)
R3919	1-218-933-81 s	RES, CHIP 22 (1005)
R3920	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R3921	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R3922	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R3923	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R3925	1-218-933-81 s	RES, CHIP 22 (1005)
R3926	1-218-933-81 s	RES, CHIP 22 (1005)
R4000	1-250-551-11 s	RES,METAL FILM CHIP 220K(1005)
R4001	1-250-555-11 s	RES,METAL FILM CHIP 330K(1005)
R4200	1-218-929-81 s	RES, CHIP 10 (1005)
R4201	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R4202	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R4203	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R4300	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R4301	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R4302	1-250-479-11 o	RES, METAL FILM CHIP 220(1005)
R4303	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R4304	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R4305	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R4306	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R4402	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R4403	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R4404	1-218-933-81 s	RES, CHIP 22 (1005)
R4405	1-218-933-81 s	RES, CHIP 22 (1005)
R4406	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R4407	1-218-933-81 s	RES, CHIP 22 (1005)
R4408	1-218-933-81 s	RES, CHIP 22 (1005)
R4409	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R4410	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R4412	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R4413	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R4414	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R4503	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R4507	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R4508	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R4509	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R4510	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R4511	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R4512	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R4600	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R4601	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R4602	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R4603	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R4604	1-218-929-81 s	RES, CHIP 10 (1005)
R4605	1-218-929-81 s	RES, CHIP 10 (1005)

DPR-362 BOARD

Ref. No. or Q'ty	Part No.	SP Description
R4606	1-218-929-81 s	RES, CHIP 10 (1005)
R4607	1-218-929-81 s	RES, CHIP 10 (1005)
R4608	1-218-933-81 s	RES, CHIP 22 (1005)
R4609	1-218-933-81 s	RES, CHIP 22 (1005)
R4610	1-218-933-81 s	RES, CHIP 22 (1005)
R4611	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R4612	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R4613	1-218-929-81 s	RES, CHIP 10 (1005)
R4614	1-218-929-81 s	RES, CHIP 10 (1005)
R4615	1-218-929-81 s	RES, CHIP 10 (1005)
R4616	1-218-929-81 s	RES, CHIP 10 (1005)
R4617	1-218-929-81 s	RES, CHIP 10 (1005)
R4618	1-218-929-81 s	RES, CHIP 10 (1005)
R4619	1-218-929-81 s	RES, CHIP 10 (1005)
R4620	1-218-929-81 s	RES, CHIP 10 (1005)
R4624	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R4625	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R4626	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R4627	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R4628	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R4701	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R4703	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R4705	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R4707	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R4708	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R4709	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R4710	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R4711	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R4712	1-218-933-81 s	RES, CHIP 22 (1005)
R4800	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R4802	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R4803	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R4805	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R4806	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R4808	1-218-929-81 s	RES, CHIP 10 (1005)
R4809	1-218-929-81 s	RES, CHIP 10 (1005)
R4810	1-218-929-81 s	RES, CHIP 10 (1005)
R4811	1-218-929-81 s	RES, CHIP 10 (1005)
R4812	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R4813	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R4814	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R4815	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R4816	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R4817	1-250-500-11 s	RES,METAL FILM CHIP 1.6K(1005)
R4818	1-250-500-11 s	RES,METAL FILM CHIP 1.6K(1005)
R4819	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R4820	1-218-933-81 s	RES, CHIP 22 (1005)
R4900	1-218-933-81 s	RES, CHIP 22 (1005)
R4902	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R4903	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R4904	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R4905	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R4906	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R4907	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R4908	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R4909	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R4910	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R4912	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R4913	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R5000	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R5001	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R5002	1-218-929-81 s	RES, CHIP 10 (1005)
R5003	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R5004	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R5005	1-218-990-81 s	CONDUCTOR, CHIP (1005)

DPR-362 BOARD

Ref. No. or Q'ty	Part No.	SP Description
R5006	1-218-929-81 s	RES, CHIP 10 (1005)
R5007	1-218-929-81 s	RES, CHIP 10 (1005)
R5008	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R5009	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R5010	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R5011	1-218-929-81 s	RES, CHIP 10 (1005)
R5012	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R5013	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R5014	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R5015	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R5016	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R5018	1-250-563-11 s	RES,METAL FILM CHIP 680K(1005)
R5019	1-250-563-11 s	RES,METAL FILM CHIP 680K(1005)
R5020	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R5021	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R5022	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R5024	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R5025	1-250-539-11 o	RES, METAL FILM CHIP 68K(1005)
R5026	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R5027	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R5028	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R5029	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R5031	1-250-567-11 s	RES, METAL FILM CHIP 1M (1005)
R5033	1-250-567-11 s	RES, METAL FILM CHIP 1M (1005)
R5034	1-250-567-11 s	RES, METAL FILM CHIP 1M (1005)
R5035	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R5037	1-250-567-11 s	RES, METAL FILM CHIP 1M (1005)
R5038	1-250-567-11 s	RES, METAL FILM CHIP 1M (1005)
R5039	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R5041	1-218-929-81 s	RES, CHIP 10 (1005)
R5042	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R5043	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R5044	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R5045	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R5046	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R5047	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R5048	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R5049	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R5050	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R5051	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R5052	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R5053	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R5054	1-250-539-11 o	RES, METAL FILM CHIP 68K(1005)
R5055	1-250-539-11 o	RES, METAL FILM CHIP 68K(1005)
R5056	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R5058	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R5100	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R5101	1-218-949-11 s	RES, CHIP 470 (1005)
R5102	1-218-949-11 s	RES, CHIP 470 (1005)
R5103	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R5104	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R5105	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R5106	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R5107	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R5108	1-250-567-11 s	RES, METAL FILM CHIP 1M (1005)
R5109	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R5110	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R5111	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R5112	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R5113	1-250-559-11 o	RES,METAL FILM CHIP 470K(1005)
R5114	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R5115	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R5116	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R5117	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R5118	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)

DPR-362 BOARD

Ref. No. or Q'ty	Part No.	SP Description
R5119	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R5120	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R5121	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R5123	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R5124	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R5125	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R5126	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R5127	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R5128	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R5129	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R5130	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R5131	1-218-929-81 s	RES, CHIP 10 (1005)
R5132	1-250-499-11 o	RES,METAL FILM CHIP 1.5K(1005)
R5133	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R5134	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R5135	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R5136	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R5137	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R5138	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R5139	1-250-567-11 s	RES, METAL FILM CHIP 1M (1005)
R5161	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R5164	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R5200	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R5201	1-218-929-81 s	RES, CHIP 10 (1005)
R5203	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R5204	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R5205	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R5206	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R5207	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R5208	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R5211	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R5216	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R5217	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R5218	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R5219	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R5220	1-694-535-91 s	CONDCTOR, CHIP (0603)
R5221	1-694-535-91 s	CONDCTOR, CHIP (0603)
R5224	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R5300	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R5301	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R5302	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R5303	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R5304	1-218-933-81 s	RES, CHIP 22 (1005)
R5305	1-218-933-81 s	RES, CHIP 22 (1005)
R5306	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R5307	1-250-521-11 s	RES, METAL FILM CHIP 12K(1005)
R5308	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R5309	1-250-547-11 s	RES,METAL FILM CHIP 150K(1005)
R5312	1-250-551-11 s	RES,METAL FILM CHIP 220K(1005)
R5315	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R5316	1-250-551-11 s	RES,METAL FILM CHIP 220K(1005)
R5317	1-250-559-11 o	RES,METAL FILM CHIP 470K(1005)
R5318	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
RB0401	1-234-378-21 s	RES, NETWORK 10K (1005X4)
RB0600	1-234-378-21 s	RES, NETWORK 10K (1005X4)
RB0601	1-234-378-21 s	RES, NETWORK 10K (1005X4)
RB0701	1-234-378-21 s	RES, NETWORK 10K (1005X4)
RB1300	1-234-380-21 s	RES, NETWORK 47K (1005X4)
RB1301	1-234-380-21 s	RES, NETWORK 47K (1005X4)
RB1800	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB1801	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB1802	1-234-380-21 s	RES, NETWORK 47K (1005X4)
RB1803	1-234-380-21 s	RES, NETWORK 47K (1005X4)
RB1804	1-234-380-21 s	RES, NETWORK 47K (1005X4)

DPR-362 BOARD

Ref. No. or Q'ty	Part No.	SP Description
RB1805	1-234-380-21 s	RES, NETWORK 47K (1005X4)
RB1806	1-234-380-21 s	RES, NETWORK 47K (1005X4)
RB1807	1-234-380-21 s	RES, NETWORK 47K (1005X4)
RB1808	1-234-380-21 s	RES, NETWORK 47K (1005X4)
RB1809	1-234-380-21 s	RES, NETWORK 47K (1005X4)
RB1810	1-234-380-21 s	RES, NETWORK 47K (1005X4)
RB1811	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB1812	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB2200	1-234-376-21 s	RES, NETWORK 2.2K (1005X4)
RB2201	1-234-376-21 s	RES, NETWORK 2.2K (1005X4)
RB2202	1-234-376-21 s	RES, NETWORK 2.2K (1005X4)
RB2203	1-234-376-21 s	RES, NETWORK 2.2K (1005X4)
RB2204	1-234-380-21 s	RES, NETWORK 47K (1005X4)
RB2205	1-234-380-21 s	RES, NETWORK 47K (1005X4)
RB2206	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB2500	1-234-377-21 s	RES, NETWORK 4.7K (1005X4)
RB2501	1-234-377-21 s	RES, NETWORK 4.7K (1005X4)
RB2600	1-234-377-21 s	RES, NETWORK 4.7K (1005X4)
RB2700	1-234-380-21 s	RES, NETWORK 47K (1005X4)
RB2900	1-234-380-21 s	RES, NETWORK 47K (1005X4)
RB2901	1-234-380-21 s	RES, NETWORK 47K (1005X4)
RB2902	1-234-380-21 s	RES, NETWORK 47K (1005X4)
RB2903	1-234-380-21 s	RES, NETWORK 47K (1005X4)
RB2906	1-234-380-21 s	RES, NETWORK 47K (1005X4)
RB2907	1-234-380-21 s	RES, NETWORK 47K (1005X4)
RB2908	1-234-380-21 s	RES, NETWORK 47K (1005X4)
RB2909	1-234-380-21 s	RES, NETWORK 47K (1005X4)
RB2910	1-234-380-21 s	RES, NETWORK 47K (1005X4)
RB2911	1-234-380-21 s	RES, NETWORK 47K (1005X4)
RB2912	1-234-380-21 s	RES, NETWORK 47K (1005X4)
RB2913	1-234-380-21 s	RES, NETWORK 47K (1005X4)
RB2914	1-234-400-21 s	CONDUCTOR, NETWORK (1005X4)
RB3200	1-234-378-21 s	RES, NETWORK 10K (1005X4)
RB3201	1-234-378-21 s	RES, NETWORK 10K (1005X4)
RB3202	1-234-378-21 s	RES, NETWORK 10K (1005X4)
RB3203	1-234-378-21 s	RES, NETWORK 10K (1005X4)
RB3204	1-234-378-21 s	RES, NETWORK 10K (1005X4)
RB3205	1-234-378-21 s	RES, NETWORK 10K (1005X4)
RB3206	1-234-378-21 s	RES, NETWORK 10K (1005X4)
RB3207	1-234-378-21 s	RES, NETWORK 10K (1005X4)
RB3208	1-234-378-21 s	RES, NETWORK 10K (1005X4)
RB3209	1-234-378-21 s	RES, NETWORK 10K (1005X4)
RB3210	1-234-378-21 s	RES, NETWORK 10K (1005X4)
RB3211	1-234-378-21 s	RES, NETWORK 10K (1005X4)
RB3212	1-234-378-21 s	RES, NETWORK 10K (1005X4)
RB3213	1-234-378-21 s	RES, NETWORK 10K (1005X4)
RB3300	1-234-378-21 s	RES, NETWORK 10K (1005X4)
RB3800	1-234-380-21 s	RES, NETWORK 47K (1005X4)
RB3801	1-234-378-21 s	RES, NETWORK 10K (1005X4)
RB3900	1-234-377-21 s	RES, NETWORK 4.7K (1005X4)
RB4200	1-234-369-21 s	RES, NETWORK 10 (1005X4)
RB4201	1-234-369-21 s	RES, NETWORK 10 (1005X4)
RB4202	1-234-369-21 s	RES, NETWORK 10 (1005X4)
RB4203	1-234-369-21 s	RES, NETWORK 10 (1005X4)
RB4204	1-234-369-21 s	RES, NETWORK 10 (1005X4)
RB4205	1-234-369-21 s	RES, NETWORK 10 (1005X4)
RB4206	1-234-369-21 s	RES, NETWORK 10 (1005X4)
RB4207	1-234-369-21 s	RES, NETWORK 10 (1005X4)
RB4400	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB4401	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB4402	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB4700	1-234-378-21 s	RES, NETWORK 10K (1005X4)
RB4900	1-234-380-21 s	RES, NETWORK 47K (1005X4)
RB4901	1-234-380-21 s	RES, NETWORK 47K (1005X4)
RB5000	1-234-384-21 o	RES, NETWORK 1M (1005X4)

DPR-362 BOARD

Ref. No. or Q'ty	Part No.	SP Description
RB5300	1-234-378-21 s	RES, NETWORK 10K (1005X4)
RB5302	1-234-370-21 s	RES, NETWORK 22 (1005X4)
S5000	1-771-721-21 s	SWITCH, TACTILE
TP5300	1-780-638-22 s	CONTACT TERMINAL
TP5301	1-780-638-22 s	CONTACT TERMINAL
TP5302	1-780-638-22 s	CONTACT TERMINAL
TP5303	1-780-638-22 s	CONTACT TERMINAL
TP5304	1-780-638-22 s	CONTACT TERMINAL
TP5305	1-535-877-22 s	CHIP, CHECKER
TP5306	1-535-877-22 s	CHIP, CHECKER
TP5307	1-535-877-22 s	CHIP, CHECKER
TP5308	1-535-877-22 s	CHIP, CHECKER
VD2600	1-802-245-11 s	ESD SUPPRESSOR
VD2601	1-802-245-11 s	ESD SUPPRESSOR
VD2602	1-802-245-11 s	ESD SUPPRESSOR
VD4500	1-805-774-21 s	VARISTOR, CHIP
VD4501	1-805-774-21 s	VARISTOR, CHIP
X2000	1-795-831-12 s	OSCILLATOR, CRYSTAL (VCXO)3.3V
X2100	1-814-185-11 s	OSCILLATOR, CRYSTAL
X2101	1-813-263-11 s	OSCILLATOR, CRYSTAL
X3100	1-813-264-11 s	OSCILLATOR, CRYSTAL
X3300	1-814-367-11 s	QUARTZ CRYSTAL UNITS 30MHZ (30 MHz)
X3500	1-814-363-11 s	QUARTZ CRYSTAL UNIT (25 MHz)
X3600	1-814-384-11 s	QUARTZ CRYSTAL UNIT (24 MHz)
X3701	1-814-363-11 s	QUARTZ CRYSTAL UNIT (25 MHz)
X3800	1-814-063-11 s	OSCILLATOR, CRYSTAL 54MHZ
X3801	1-813-493-11 s	OSCILLATOR, CRYSTAL
X4800	1-814-543-11 s	QUARTZ CRYSTAL UNITS 11.2896MH (11.2896 MHz)
X4801	1-814-384-11 s	QUARTZ CRYSTAL UNIT (24 MHz)
X5000	1-781-525-11 s	VIBRATOR, CRYSTAL (32.768 KHz)

EC-82 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-2057-066-A s	MOUNTED CIRCUIT BOARD, EC-82
2pcs	1-821-531-13 s	CONNECTOR, EX CARD(GUIDE UNIT)
4pcs	3-968-729-52 s	SCREW (M2), LOCK ACE, P2
C100	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C101	1-100-421-21 s	CAP, ELECT 220MF (6.3X5.9)
C102	1-116-717-11 s	CAP, CERAMIC 10MF X5R 2012
C103	1-116-717-11 s	CAP, CERAMIC 10MF X5R 2012
C104	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C105	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C106	1-118-418-11 s	CAP, CERAMIC 22MF X5R (2012)
C107	1-118-418-11 s	CAP, CERAMIC 22MF X5R (2012)
C108	1-118-407-11 o	CAP, CERAMIC 470PF X7R 1005
C109	1-118-418-11 s	CAP, CERAMIC 22MF X5R (2012)
C110	1-118-418-11 s	CAP, CERAMIC 22MF X5R (2012)
C113	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C114	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C115	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C116	1-116-717-11 s	CAP, CERAMIC 10MF X5R 2012
C117	1-116-717-11 s	CAP, CERAMIC 10MF X5R 2012
C118	1-116-717-11 s	CAP, CERAMIC 10MF X5R 2012
C119	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C120	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C121	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C122	1-116-713-11 s	CAP, CERAMIC 22MF X5R 2012
C123	1-100-421-21 s	CAP, ELECT 220MF (6.3X5.9)

EC-82 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C124	1-164-858-81 s	CAP, CHIP CERAMIC 22PF CH 1005
C200	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C201	1-116-717-11 s	CAP, CERAMIC 10MF X5R 2012
C202	1-116-717-11 s	CAP, CERAMIC 10MF X5R 2012
C203	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C204	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C205	1-118-418-11 s	CAP, CERAMIC 22MF X5R (2012)
C206	1-118-418-11 s	CAP, CERAMIC 22MF X5R (2012)
C207	1-118-407-11 o	CAP, CERAMIC 470PF X7R 1005
C208	1-118-418-11 s	CAP, CERAMIC 22MF X5R (2012)
C209	1-118-418-11 s	CAP, CERAMIC 22MF X5R (2012)
C210	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C211	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C212	1-116-717-11 s	CAP, CERAMIC 10MF X5R 2012
C213	1-116-717-11 s	CAP, CERAMIC 10MF X5R 2012
C214	1-116-717-11 s	CAP, CERAMIC 10MF X5R 2012
C215	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C216	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C217	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C218	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
CN101	1-821-530-12 s	CONNECTOR, EX CARD (HOST)
CN200	1-770-161-21 s	PIN, CONNECTOR (PC BOARD) 6P
CN201	1-821-530-12 s	CONNECTOR, EX CARD (HOST)
CN202	1-770-619-21 s	PIN, CONNECTOR 2P
D100	6-501-021-01 s	DIODE SML-521MDWT86
D200	6-501-021-01 s	DIODE SML-521MDWT86
D201	8-719-820-42 s	DIODE 1SS302-TE85L
E200	1-535-757-21 s	CHIP, CHECKER
E201	1-535-757-21 s	CHIP, CHECKER
FB100	1-400-580-21 s	FERRITE, EMI (SMD)
FB101	1-400-580-21 s	FERRITE, EMI (SMD)
FB102	1-400-580-21 s	FERRITE, EMI (SMD)
FB103	1-400-580-21 s	FERRITE, EMI (SMD)
IC200	6-715-034-01 s	IC TC7SZ00FU, RSONYJ
IC202	6-715-040-01 o	IC TC7SZ32FU, RSONYJ
L100	1-457-852-11 s	COIL, CHOKE 1.2UH
R100	1-250-487-11 s	RES, METAL FILM CHIP 470(1005)
R101	1-250-479-11 o	RES, METAL FILM CHIP 220(1005)
R102	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R103	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R104	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R105	1-250-495-11 s	RES, METAL FILM CHIP 1.0K(1005)
R107	1-250-511-11 o	RES, METAL FILM CHIP 4.7K(1005)
R109	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R115	1-250-495-11 s	RES, METAL FILM CHIP 1.0K(1005)
R116	1-250-495-11 s	RES, METAL FILM CHIP 1.0K(1005)
R117	1-250-547-11 s	RES, METAL FILM CHIP 150K(1005)
R118	1-250-543-11 o	RES, METAL FILM CHIP 100K(1005)
R200	1-250-487-11 s	RES, METAL FILM CHIP 470(1005)
R201	1-250-479-11 o	RES, METAL FILM CHIP 220(1005)
R202	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R203	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R204	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R205	1-250-487-11 s	RES, METAL FILM CHIP 470(1005)
R206	1-250-503-11 o	RES, METAL FILM CHIP 2.2K(1005)
R207	1-250-495-11 s	RES, METAL FILM CHIP 1.0K(1005)
R208	1-250-511-11 o	RES, METAL FILM CHIP 4.7K(1005)
R209	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R210	1-250-495-11 s	RES, METAL FILM CHIP 1.0K(1005)
R211	1-250-495-11 s	RES, METAL FILM CHIP 1.0K(1005)
R212	1-245-604-81 s	RES, CHIP 10M (1005)

EC-82 BOARD

Ref. No. or Q'ty	Part No.	SP Description
S200	1-554-088-41 s	SWITCH, KEY BOARD
VDR100	1-802-245-11 s	ESD SUPPRESSOR
VDR101	1-802-245-11 s	ESD SUPPRESSOR
VDR200	1-802-245-11 s	ESD SUPPRESSOR
VDR201	1-802-245-11 s	ESD SUPPRESSOR

ENC-162 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-2054-876-A s	MOUNTED CIRCUIT BOARD, ENC-162
C1	1-118-036-11 s	CAP, CERAMIC 0.1MF X5R (1608)
C2	1-118-036-11 s	CAP, CERAMIC 0.1MF X5R (1608)
C3	1-118-036-11 s	CAP, CERAMIC 0.1MF X5R (1608)
CN1	1-819-412-11 o	PIN, CONNECTOR (1.5MM) 4P
EN1	1-467-973-21 s	ENCODER, ROTARY

FP-208 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-2058-611-A s	MOUNTED CIRCUIT BOARD, FP-208
BH601	1-756-991-21 s	HOLDER, LITHIUM BATTERY (CR203
C101	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C103	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C105	1-116-734-11 s	CAP, CERAMIC 1MF X5R 1608
C106	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C107	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C108	1-116-734-11 s	CAP, CERAMIC 1MF X5R 1608
C109	1-116-734-11 s	CAP, CERAMIC 1MF X5R 1608
C110	1-116-734-11 s	CAP, CERAMIC 1MF X5R 1608
C111	1-116-734-11 s	CAP, CERAMIC 1MF X5R 1608
C112	1-116-734-11 s	CAP, CERAMIC 1MF X5R 1608
C113	1-116-734-11 s	CAP, CERAMIC 1MF X5R 1608
C114	1-116-734-11 s	CAP, CERAMIC 1MF X5R 1608
C115	1-116-734-11 s	CAP, CERAMIC 1MF X5R 1608
C116	1-116-734-11 s	CAP, CERAMIC 1MF X5R 1608
C117	1-116-734-11 s	CAP, CERAMIC 1MF X5R 1608
C118	1-116-734-11 s	CAP, CERAMIC 1MF X5R 1608
C119	1-116-734-11 s	CAP, CERAMIC 1MF X5R 1608
C122	1-116-734-11 s	CAP, CERAMIC 1MF X5R 1608
C123	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C124	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C129	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C132	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C136	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C203	1-116-734-11 s	CAP, CERAMIC 1MF X5R 1608
C204	1-116-734-11 s	CAP, CERAMIC 1MF X5R 1608
C205	1-116-734-11 s	CAP, CERAMIC 1MF X5R 1608
C206	1-116-734-11 s	CAP, CERAMIC 1MF X5R 1608
C207	1-116-734-11 s	CAP, CERAMIC 1MF X5R 1608
C208	1-116-734-11 s	CAP, CERAMIC 1MF X5R 1608
C209	1-116-734-11 s	CAP, CERAMIC 1MF X5R 1608
C210	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C211	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C212	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C213	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608

FP-208 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C216	1-116-734-11 s	CAP, CERAMIC 1MF X5R 1608
C217	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C218	1-116-734-11 s	CAP, CERAMIC 1MF X5R 1608
C219	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C220	1-116-734-11 s	CAP, CERAMIC 1MF X5R 1608
C221	1-116-734-11 s	CAP, CERAMIC 1MF X5R 1608
C222	1-116-734-11 s	CAP, CERAMIC 1MF X5R 1608
C223	1-116-734-11 s	CAP, CERAMIC 1MF X5R 1608
C224	1-116-734-11 s	CAP, CERAMIC 1MF X5R 1608
C225	1-116-734-11 s	CAP, CERAMIC 1MF X5R 1608
C226	1-116-734-11 s	CAP, CERAMIC 1MF X5R 1608
C227	1-116-734-11 s	CAP, CERAMIC 1MF X5R 1608
C228	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C229	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C230	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C231	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C232	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C233	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C234	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C235	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C236	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C237	1-116-734-11 s	CAP, CERAMIC 1MF X5R 1608
C238	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C301	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C302	1-116-738-11 o	CAP, CERAMIC 1MF X6S 1005
C303	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C304	1-116-724-11 s	CAP, CERAMIC 4.7MF X5R 1608
C306	1-116-724-11 s	CAP, CERAMIC 4.7MF X5R 1608
C402	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C403	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C404	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C405	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C406	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C407	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C408	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C409	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C410	1-116-738-11 o	CAP, CERAMIC 1MF X6S 1005
C411	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C412	1-116-724-11 s	CAP, CERAMIC 4.7MF X5R 1608
C414	1-116-724-11 s	CAP, CERAMIC 4.7MF X5R 1608
C501	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C502	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C503	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C504	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C505	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C506	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C507	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C508	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C510	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C511	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C512	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C513	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C515	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C516	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C517	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C601	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C602	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C604	1-116-865-11 s	CAP, CERAMIC 10MF X5R 3216
C605	1-116-734-11 s	CAP, CERAMIC 1MF X5R 1608
C609	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C612	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
CN101	1-764-007-21 o	PIN, CONNECTOR (SMD) 12P
CN202	1-818-210-21 s	PIN, CONNECTOR 2P
CN301	1-817-869-21 s	PIN, CONNECTOR 10P
CN401	1-817-869-21 s	PIN, CONNECTOR 10P

FP-208 BOARD

Ref. No. or Q'ty	Part No.	SP Description
CN501	1-784-254-21 s	CONNECTOR 10P
CN601	1-750-992-51 s	CONNECTOR, FPC 25P
CN602	1-750-992-51 s	CONNECTOR, FPC 25P
CN603	1-750-992-51 s	CONNECTOR, FPC 25P
CN604	1-580-055-21 o	PIN, CONNECTOR (SMD) 2P
CN605	1-580-756-21 s	PIN, CONNECTOR (SMD) 7P
CN606	1-580-057-21 s	PIN, CONNECTOR (SMD) 4P
D102	6-503-343-01 s	DI DAN217WGTL
D104	8-719-063-83 s	DIODE CL-196YG-CD-T
D106	6-501-052-02 s	DIODE CL-197HB1-D-T
D107	8-719-077-09 s	DIODE CL-196HR-CD-T
D108	6-503-343-01 s	DI DAN217WGTL
D109	6-503-343-01 s	DI DAN217WGTL
D110	6-503-343-01 s	DI DAN217WGTL
D111	6-503-343-01 s	DI DAN217WGTL
D112	6-503-343-01 s	DI DAN217WGTL
D113	6-503-343-01 s	DI DAN217WGTL
D114	6-503-343-01 s	DI DAN217WGTL
D115	6-503-343-01 s	DI DAN217WGTL
D116	6-503-343-01 s	DI DAN217WGTL
D119	6-503-343-01 s	DI DAN217WGTL
D126	6-503-343-01 s	DI DAN217WGTL
D127	6-503-343-01 s	DI DAN217WGTL
D129	6-503-343-01 s	DI DAN217WGTL
D203	6-503-343-01 s	DI DAN217WGTL
D204	6-503-343-01 s	DI DAN217WGTL
D205	6-503-343-01 s	DI DAN217WGTL
D206	6-503-343-01 s	DI DAN217WGTL
D207	6-503-343-01 s	DI DAN217WGTL
D208	6-503-343-01 s	DI DAN217WGTL
D209	6-503-343-01 s	DI DAN217WGTL
D212	6-503-343-01 s	DI DAN217WGTL
D213	6-503-343-01 s	DI DAN217WGTL
D214	6-503-343-01 s	DI DAN217WGTL
D215	6-503-343-01 s	DI DAN217WGTL
D216	6-503-343-01 s	DI DAN217WGTL
D217	6-503-343-01 s	DI DAN217WGTL
D218	6-503-343-01 s	DI DAN217WGTL
D219	6-503-343-01 s	DI DAN217WGTL
D220	6-503-343-01 s	DI DAN217WGTL
D221	6-503-343-01 s	DI DAN217WGTL
D601	6-503-343-01 s	DI DAN217WGTL
D602	6-503-343-01 s	DI DAN217WGTL
D603	6-503-343-01 s	DI DAN217WGTL
FB601	1-469-670-21 s	FERRITE, EMI (SMD) (2012)
FB602	1-469-670-21 s	FERRITE, EMI (SMD) (2012)
FB603	1-469-670-21 s	FERRITE, EMI (SMD) (2012)
IC301	6-715-041-01 s	IC TC7SZ125FU,RSOYJ
IC401	6-715-041-01 s	IC TC7SZ125FU,RSOYJ
IC402	8-759-675-54 s	IC TC7W53FK (TE85R)
IC403	8-759-675-54 s	IC TC7W53FK (TE85R)
IC407	6-703-879-01 s	IC NJU7043RB1 (TE2)
IC501	6-711-485-01 s	IC TC74VCX125FK (EL)
IC502	6-715-040-01 o	IC TC7SZ32FU,RSOYJ
IC505	6-718-136-01 s	IC TC7WG125FK
IC506	6-710-243-01 s	IC SN74AVC1T45DCKR
Q101	8-729-929-09 s	TRANSISTOR DTC123JE-TL
Q102	8-729-929-09 s	TRANSISTOR DTC123JE-TL
Q103	8-729-929-09 s	TRANSISTOR DTC123JE-TL
Q104	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q105	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q106	8-729-929-09 s	TRANSISTOR DTC123JE-TL
Q401	8-729-928-28 s	TRANSISTOR DTA144EE-TL

FP-208 BOARD

Ref. No. or Q'ty	Part No.	SP Description
Q402	8-729-927-99 s	TRANSISTOR 2SC4617TL-QR
Q405	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q406	8-729-928-82 s	TRANSISTOR DTC144EE-TL
R101	1-250-479-11 o	RES, METAL FILM CHIP 220(1005)
R103	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R104	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R105	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R107	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R108	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R110	1-250-479-11 o	RES, METAL FILM CHIP 220(1005)
R111	1-250-479-11 o	RES, METAL FILM CHIP 220(1005)
R112	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R113	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R114	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R115	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R116	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R117	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R118	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R119	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R120	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R121	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R122	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R123	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R124	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R125	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R126	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R127	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R128	1-250-479-11 o	RES, METAL FILM CHIP 220(1005)
R129	1-250-479-11 o	RES, METAL FILM CHIP 220(1005)
R130	1-250-479-11 o	RES, METAL FILM CHIP 220(1005)
R132	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R133	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R134	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R135	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R136	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R201	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R202	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R204	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R205	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R206	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R207	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R208	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R209	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R210	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R211	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R212	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R213	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R214	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R215	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R216	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R217	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R218	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R219	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R220	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R221	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R222	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R301	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R302	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R303	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R305	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R307	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R308	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R310	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R311	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R312	1-218-990-81 s	CONDUCTOR, CHIP (1005)

FP-208 BOARD

Ref. No. or Q'ty	Part No.	SP Description
R313	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R314	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R315	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R316	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R317	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R329	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R330	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R401	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R406	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R407	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R408	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R409	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R410	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R411	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R412	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R413	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R414	1-250-531-11 s	RES, METAL FILM CHIP 33K(1005)
R415	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R416	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R417	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R418	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R419	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R420	1-218-965-81 s	RES, CHIP 10K (1005)
R421	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R422	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R423	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R426	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R427	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R429	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R430	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R431	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R443	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R444	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R453	1-250-507-11 o	RES,METAL FILM CHIP 3.3K(1005)
R454	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R501	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R502	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R503	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R504	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R505	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R506	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R509	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R510	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R602	1-250-483-11 s	RES, METAL FILM CHIP 330(1005)
R606	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R607	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R608	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R609	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R610	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R611	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R612	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R613	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R614	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R615	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R616	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R617	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R618	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R619	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R621	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R622	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R623	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R624	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R628	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R629	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R631	1-218-990-81 s	CONDUCTOR, CHIP (1005)

FP-208 BOARD

Ref. No. or Q'ty	Part No.	SP Description
R632	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R633	1-218-990-81 s	CONDUCTOR, CHIP (1005)
RB101	1-234-375-21 s	RES, NETWORK 1K (1005X4)
RB102	1-234-375-21 s	RES, NETWORK 1K (1005X4)
RB103	1-234-375-21 s	RES, NETWORK 1K (1005X4)
RB301	1-234-380-21 s	RES, NETWORK 47K (1005X4)
RB302	1-234-380-21 s	RES, NETWORK 47K (1005X4)
RB303	1-234-375-21 s	RES, NETWORK 1K (1005X4)
RB401	1-234-380-21 s	RES, NETWORK 47K (1005X4)
RB402	1-234-380-21 s	RES, NETWORK 47K (1005X4)
RB501	1-234-369-21 s	RES, NETWORK 10 (1005X4)
RB502	1-234-381-21 s	RES, NETWORK 100K (1005X4)
RB503	1-234-381-21 s	RES, NETWORK 100K (1005X4)
RB504	1-234-369-21 s	RES, NETWORK 10 (1005X4)
RV101	1-227-892-21 s	RES, VAR, CARBON 50K
RV102	1-227-892-21 s	RES, VAR, CARBON 50K
RV201	1-227-892-21 s	RES, VAR, CARBON 50K
RV202	1-227-892-21 s	RES, VAR, CARBON 50K
RV203	1-227-892-21 s	RES, VAR, CARBON 50K
RV204	1-227-892-21 s	RES, VAR, CARBON 50K
S101	1-786-867-13 s	SWITCH, TACT (WITH LED)
S102	1-771-140-21 s	SWITCH, SLIDE
S103	1-786-867-13 s	SWITCH, TACT (WITH LED)
S104	1-786-867-13 s	SWITCH, TACT (WITH LED)
S105	1-771-140-21 s	SWITCH, SLIDE
S106	1-771-141-21 s	SWITCH, SLIDE
S107	1-572-725-11 s	SWITCH, TACTILE
S108	1-572-725-11 s	SWITCH, TACTILE
S109	1-572-725-11 s	SWITCH, TACTILE
S110	1-572-725-11 s	SWITCH, TACTILE
S111	1-572-725-11 s	SWITCH, TACTILE
S112	1-572-725-11 s	SWITCH, TACTILE
S113	1-572-725-11 s	SWITCH, TACTILE
S114	1-572-725-11 s	SWITCH, TACTILE
S115	1-572-725-11 s	SWITCH, TACTILE
S201	1-572-725-11 s	SWITCH, TACTILE
S202	1-771-141-21 s	SWITCH, SLIDE
S203	1-771-141-21 s	SWITCH, SLIDE
S204	1-771-141-21 s	SWITCH, SLIDE
S205	1-572-725-11 s	SWITCH, TACTILE
S206	1-572-725-11 s	SWITCH, TACTILE
S207	1-572-725-11 s	SWITCH, TACTILE
S208	1-771-141-21 s	SWITCH, SLIDE
S209	1-771-141-21 s	SWITCH, SLIDE
S210	1-771-141-21 s	SWITCH, SLIDE
S211	1-771-141-21 s	SWITCH, SLIDE
S212	1-771-140-21 s	SWITCH, SLIDE
S213	1-771-140-21 s	SWITCH, SLIDE
S214	1-771-140-21 s	SWITCH, SLIDE
TP1	1-535-757-21 s	CHIP, CHECKER
TP2	1-535-757-21 s	CHIP, CHECKER
TP3	1-535-757-21 s	CHIP, CHECKER
TP4	1-535-757-21 s	CHIP, CHECKER
TP5	1-535-757-21 s	CHIP, CHECKER
TP6	1-535-757-21 s	CHIP, CHECKER

HN-415 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-2054-868-A	s MOUNTED CIRCUIT BOARD, HN-415
C31	1-116-865-11	s CAP, CERAMIC 10MF X5R 3216
C32	1-116-865-11	s CAP, CERAMIC 10MF X5R 3216
C33	1-118-035-11	o CAP, CERAMIC 0.1MF X5R (1005)
C34	1-116-865-11	s CAP, CERAMIC 10MF X5R 3216
C35	1-116-865-11	s CAP, CERAMIC 10MF X5R 3216
C36	1-116-865-11	s CAP, CERAMIC 10MF X5R 3216
C37	1-116-865-11	s CAP, CERAMIC 10MF X5R 3216
C51	1-118-036-11	s CAP, CERAMIC 0.1MF X5R (1608)
C52	1-118-036-11	s CAP, CERAMIC 0.1MF X5R (1608)
C53	1-118-036-11	s CAP, CERAMIC 0.1MF X5R (1608)
CN2	1-779-772-21	s CONNECTOR 13P
CN3	1-770-469-41	s PIN, CONNECTOR (PC BOARD) 2P
CN4	1-822-974-11	s CONNECTOR, COAXIAL 40P
CN5	1-819-410-11	o PIN, CONNECTOR (1.5MM) 2P
CN6	1-819-411-11	o PIN, CONNECTOR (1.5MM) 3P
CN7	1-766-383-21	s PIN, CONNECTOR (1.5MM) (SMD) 12P
CN51	1-817-869-21	s PIN, CONNECTOR 10P
FB31	1-469-094-21	s FERRITE, EMI (SMD) (1608)
FB32	1-469-094-21	s FERRITE, EMI (SMD) (1608)
FB33	1-469-094-21	s FERRITE, EMI (SMD) (1608)
FB34	1-469-094-21	s FERRITE, EMI (SMD) (1608)
FB35	1-469-094-21	s FERRITE, EMI (SMD) (1608)
FB36	1-469-094-21	s FERRITE, EMI (SMD) (1608)
FB37	1-469-094-21	s FERRITE, EMI (SMD) (1608)
FL1	1-234-859-11	s FILTER, EMI REMOVAL
FL31	1-200-014-21	s FILTER, EMI REMOVAL (SMD)
FL32	1-200-014-21	s FILTER, EMI REMOVAL (SMD)
FL33	1-200-014-21	s FILTER, EMI REMOVAL (SMD)
IC31	6-711-926-01	f IC TC7WG126FC(T5LSONY
L1	1-457-539-11	s COMMON MODE CHOKE COIL
L2	1-457-539-11	s COMMON MODE CHOKE COIL
L3	1-457-539-11	s COMMON MODE CHOKE COIL
R6	1-250-471-11	s RES, METAL FILM CHIP 100(1005)
R7	1-250-471-11	s RES, METAL FILM CHIP 100(1005)
R8	1-250-471-11	s RES, METAL FILM CHIP 100(1005)
R31	1-218-990-81	s CONDUCTOR, CHIP (1005)
R32	1-218-990-81	s CONDUCTOR, CHIP (1005)
R33	1-218-990-81	s CONDUCTOR, CHIP (1005)
R34	1-218-990-81	s CONDUCTOR, CHIP (1005)
R35	1-218-990-81	s CONDUCTOR, CHIP (1005)
R36	1-218-990-81	s CONDUCTOR, CHIP (1005)
R37	1-218-990-81	s CONDUCTOR, CHIP (1005)
R38	1-250-543-11	o RES,METAL FILM CHIP 100K(1005)
VDR1	1-802-481-11	s ESD SUPPRESSOR (4 ARRAY)
VDR2	1-802-481-11	s ESD SUPPRESSOR (4 ARRAY)
VDR3	1-802-481-11	s ESD SUPPRESSOR (4 ARRAY)
VDR4	1-802-481-11	s ESD SUPPRESSOR (4 ARRAY)

HP-171 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-2054-875-A	s MOUNTED CIRCUIT BOARD, HP-171
C1	1-118-399-11	s CAP, CERAMIC 2200PF X7R 1005
C2	1-118-399-11	s CAP, CERAMIC 2200PF X7R 1005
C3	1-164-874-81	s CAP,CHIP CERAMIC 100PF CH 1005
CN1	1-580-756-21	s PIN, CONNECTOR (SMD) 7P

HP-171 BOARD

Ref. No. or Q'ty	Part No.	SP Description
CN2	1-794-525-12	s JACK, MIC
D1	6-503-618-01	s DI UDZVTE-176.8B
FB1	1-400-461-21	s FERRITE, EMI (SMD) (1005)
FB2	1-400-461-21	s FERRITE, EMI (SMD) (1005)
L1	1-469-549-21	s INDUCTOR, CHIP 1.0UH (LB2016)
R1	1-250-495-11	s RES,METAL FILM CHIP 1.0K(1005)
VDR1	1-803-974-21	s VARISTOR, CHIP (1608)
VDR2	1-803-974-21	s VARISTOR, CHIP (1608)

HPR-53 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-2063-284-A	s MOUNTED CIRCUIT BOARD, HPR-53
C106	1-118-035-11	o CAP, CERAMIC 0.1MF X5R (1005)
C127	1-114-214-81	s CAP,CHIP CERAMIC470PF CH1005
C131	1-118-035-11	o CAP, CERAMIC 0.1MF X5R (1005)
C201	1-118-035-11	o CAP, CERAMIC 0.1MF X5R (1005)
C202	1-118-035-11	o CAP, CERAMIC 0.1MF X5R (1005)
C304	1-118-035-11	o CAP, CERAMIC 0.1MF X5R (1005)
C305	1-118-035-11	o CAP, CERAMIC 0.1MF X5R (1005)
C310	1-118-035-11	o CAP, CERAMIC 0.1MF X5R (1005)
C311	1-118-035-11	o CAP, CERAMIC 0.1MF X5R (1005)
C312	1-118-035-11	o CAP, CERAMIC 0.1MF X5R (1005)
C500	1-116-717-11	s CAP, CERAMIC 10MF X5R 2012
C501	1-116-713-11	s CAP, CERAMIC 22MF X5R 2012
C502	1-164-866-81	s CAP, CHIP CERAMIC 47PF CH 1005
C503	1-112-692-81	s CAP,CHIP CERAMIC1000PF CH 1005
C504	1-118-391-11	s CAP, CERAMIC 0.01MF X7R 1005
C505	1-118-391-11	s CAP, CERAMIC 0.01MF X7R 1005
C506	1-118-041-11	s CAP, CERAMIC 4.7MF X5R (1608)
C507	1-118-041-11	s CAP, CERAMIC 4.7MF X5R (1608)
C508	1-118-041-11	s CAP, CERAMIC 4.7MF X5R (1608)
C509	1-118-041-11	s CAP, CERAMIC 4.7MF X5R (1608)
C510	1-116-741-11	s CAP, CERAMIC 0.47MF X5R 1005
C511	1-116-741-11	s CAP, CERAMIC 0.47MF X5R 1005
C512	1-116-741-11	s CAP, CERAMIC 0.47MF X5R 1005
C513	1-116-741-11	s CAP, CERAMIC 0.47MF X5R 1005
C514	1-116-717-11	s CAP, CERAMIC 10MF X5R 2012
C515	1-116-717-11	s CAP, CERAMIC 10MF X5R 2012
C516	1-118-035-11	o CAP, CERAMIC 0.1MF X5R (1005)
C517	1-118-035-11	o CAP, CERAMIC 0.1MF X5R (1005)
C518	1-118-035-11	o CAP, CERAMIC 0.1MF X5R (1005)
C519	1-164-850-81	s CAP, CHIP CERAMIC 10PF CH 1005
C520	1-118-035-11	o CAP, CERAMIC 0.1MF X5R (1005)
C521	1-118-035-11	o CAP, CERAMIC 0.1MF X5R (1005)
C522	1-116-713-11	s CAP, CERAMIC 22MF X5R 2012
C523	1-116-717-11	s CAP, CERAMIC 10MF X5R 2012
C524	1-118-041-11	s CAP, CERAMIC 4.7MF X5R (1608)
C525	1-118-041-11	s CAP, CERAMIC 4.7MF X5R (1608)
C526	1-116-717-11	s CAP, CERAMIC 10MF X5R 2012
C527	1-118-041-11	s CAP, CERAMIC 4.7MF X5R (1608)
C528	1-118-041-11	s CAP, CERAMIC 4.7MF X5R (1608)
C529	1-118-035-11	o CAP, CERAMIC 0.1MF X5R (1005)

C536	1-118-035-11	o CAP, CERAMIC 0.1MF X5R (1005)
C537	1-118-035-11	o CAP, CERAMIC 0.1MF X5R (1005)
C538	1-118-035-11	o CAP, CERAMIC 0.1MF X5R (1005)
C539	1-118-035-11	o CAP, CERAMIC 0.1MF X5R (1005)
C563	1-118-403-11	s CAP, CERAMIC 1000PF X7R 1005

HPR-53 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C701	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C702	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C713	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C714	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C800	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C801	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C802	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C804	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C805	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C806	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C807	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C808	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C809	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C810	1-116-713-11 s	CAP, CERAMIC 22MF X5R 2012
C811	1-116-713-11 s	CAP, CERAMIC 22MF X5R 2012
C812	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C813	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C814	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C815	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C816	1-116-717-11 s	CAP, CERAMIC 10MF X5R 2012
C817	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C818	1-164-866-81 s	CAP, CHIP CERAMIC 47PF CH 1005
C819	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C820	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C821	1-116-724-11 s	CAP, CERAMIC 4.7MF X5R 1608
C822	1-116-724-11 s	CAP, CERAMIC 4.7MF X5R 1608
C823	1-116-724-11 s	CAP, CERAMIC 4.7MF X5R 1608
C824	1-116-724-11 s	CAP, CERAMIC 4.7MF X5R 1608
C825	1-116-724-11 s	CAP, CERAMIC 4.7MF X5R 1608
C828	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C829	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C830	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C831	1-118-397-11 s	CAP, CERAMIC 3300PF X7R 1005
C832	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C833	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C834	1-118-395-11 s	CAP, CERAMIC 4700PF X7R 1005
C835	1-116-724-11 s	CAP, CERAMIC 4.7MF X5R 1608
C836	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C837	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C838	1-116-724-11 s	CAP, CERAMIC 4.7MF X5R 1608
C839	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C840	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C841	1-116-724-11 s	CAP, CERAMIC 4.7MF X5R 1608
C842	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C843	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C844	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C845	1-116-724-11 s	CAP, CERAMIC 4.7MF X5R 1608
C847	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C848	1-116-724-11 s	CAP, CERAMIC 4.7MF X5R 1608
C849	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C850	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C851	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C852	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C853	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C854	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C855	1-116-713-11 s	CAP, CERAMIC 22MF X5R 2012
C856	1-164-866-81 s	CAP, CHIP CERAMIC 47PF CH 1005
C857	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C858	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C859	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C860	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C861	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C864	1-116-724-11 s	CAP, CERAMIC 4.7MF X5R 1608
C865	1-116-724-11 s	CAP, CERAMIC 4.7MF X5R 1608
C866	1-116-724-11 s	CAP, CERAMIC 4.7MF X5R 1608

HPR-53 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C868	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C869	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C870	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C871	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C872	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C874	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C875	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C876	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C877	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C878	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C879	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C880	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C881	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C882	1-164-866-81 s	CAP, CHIP CERAMIC 47PF CH 1005
C883	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C884	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C886	1-118-403-11 s	CAP, CERAMIC 1000PF X7R 1005
C887	1-118-403-11 s	CAP, CERAMIC 1000PF X7R 1005
C888	1-164-866-81 s	CAP, CHIP CERAMIC 47PF CH 1005
C890	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C891	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C902	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C903	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C905	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C906	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C907	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C908	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C1002	1-116-713-11 s	CAP, CERAMIC 22MF X5R 2012
C1100	1-116-713-11 s	CAP, CERAMIC 22MF X5R 2012
C1400	1-116-713-11 s	CAP, CERAMIC 22MF X5R 2012
C1443	1-116-713-11 s	CAP, CERAMIC 22MF X5R 2012
C1446	1-116-717-11 s	CAP, CERAMIC 10MF X5R 2012
C1447	1-116-717-11 s	CAP, CERAMIC 10MF X5R 2012
C1448	1-116-713-11 s	CAP, CERAMIC 22MF X5R 2012
C1449	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C1451	1-164-858-81 s	CAP, CHIP CERAMIC 22PF CH 1005
C1452	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C1453	1-116-713-11 s	CAP, CERAMIC 22MF X5R 2012
C1488	1-118-403-11 s	CAP, CERAMIC 1000PF X7R 1005
C1502	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C1504	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C1506	1-116-732-11 s	CAP, CERAMIC 2.2MF X5R 1005
C1520	1-116-732-11 s	CAP, CERAMIC 2.2MF X5R 1005
C1533	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C1534	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C1535	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C1536	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C1538	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C1539	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C1540	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C1542	1-118-403-11 s	CAP, CERAMIC 1000PF X7R 1005
C1551	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C1552	1-118-403-11 s	CAP, CERAMIC 1000PF X7R 1005
C1553	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C1554	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C1555	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C1556	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C1557	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C1559	1-118-418-11 s	CAP, CERAMIC 22MF X5R (2012)
C1560	1-114-103-91 o	CAP, CERAMIC 3PF CH (0603)
CN100	1-785-553-21 o	CONNECTOR, BOARD TO BOARD 120P
CN400	1-820-982-11 s	CONNECTOR, COAXIAL 30P
CN600	1-817-869-21 s	PIN, CONNECTOR 10P
CN800	1-784-254-21 s	CONNECTOR 10P

HPR-53 BOARD

Ref. No. or Q'ty	Part No.	SP Description
D1400	6-503-573-01 o	DI 1SS400SMGJT2R
E100	1-535-877-22 s	CHIP, CHECKER
E101	1-535-877-22 s	CHIP, CHECKER
E102	1-535-877-22 s	CHIP, CHECKER
E103	1-535-877-22 s	CHIP, CHECKER
ET100	1-780-627-11 s	TERMINAL, LUG
ET101	1-780-627-11 s	TERMINAL, LUG
ET102	1-780-627-11 s	TERMINAL, LUG
ET103	1-780-627-11 s	TERMINAL, LUG
FB100	1-400-462-21 s	FERRITE, EMI (SMD) (1005)
FB300	1-400-462-21 s	FERRITE, EMI (SMD) (1005)
FB500	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB1400	1-400-462-21 s	FERRITE, EMI (SMD) (1005)
FB1401	1-400-462-21 s	FERRITE, EMI (SMD) (1005)
FB1402	1-400-462-21 s	FERRITE, EMI (SMD) (1005)
FB1500	1-400-462-21 s	FERRITE, EMI (SMD) (1005)
FB1503	1-400-461-21 s	FERRITE, EMI (SMD) (1005)
FB1551	1-400-461-21 s	FERRITE, EMI (SMD) (1005)
FB1552	1-400-461-21 s	FERRITE, EMI (SMD) (1005)
FL1100	1-234-939-21 s	FILTER, EMI REMOVAL (SMD)
FL1400	1-234-939-21 s	FILTER, EMI REMOVAL (SMD)
FL1401	1-234-939-21 s	FILTER, EMI REMOVAL (SMD)
FL1500	1-234-939-21 s	FILTER, EMI REMOVAL (SMD)
IC100	6-721-681-01 s	IC XC7K325T-L2FBG900E
IC101	6-706-482-01 s	IC TC7SH00FU
IC104	6-711-497-01 s	IC TC74VCX541FK(EL)
IC106	6-700-831-01 s	IC TC7W274FK
IC127	6-705-971-01 s	IC TC7PA14FU(TB85R)
IC129	6-707-414-01 s	IC DS90LV011ATMF
IC130	6-711-497-01 s	IC TC74VCX541FK(EL)
IC136	6-707-414-01 s	IC DS90LV011ATMF
IC137	6-703-848-01 s	IC SN74CB3T3306DCUR
IC500	6-706-220-01 s	IC LTC3411EMS#TR
IC800	6-721-682-01 s	IC N25Q256A13EF840F
IC801	6-711-485-01 s	IC TC74VCX125FK(EL)
IC802	6-715-041-01 s	IC TC7SZ125FU,RSOYJ
IC803	8-759-831-52 s	IC TC7WH125FK
IC804	6-714-379-01 s	IC TPS62065DSGR
IC805	6-714-379-01 s	IC TPS62065DSGR
IC807	6-714-379-01 s	IC TPS62065DSGR
IC808	6-714-379-01 s	IC TPS62065DSGR
IC809	6-600-060-01 s	IC TC7W232FK
IC810	6-721-682-01 s	IC N25Q256A13EF840F
IC811	6-706-484-01 s	IC TC7SH04FU
IC1400	6-714-506-01 s	IC MM3404A12URE
IC1500	6-707-414-01 s	IC DS90LV011ATMF
IC1551	6-714-608-01 s	IC TPS51200DRCR
J500	1-764-243-31 o	CONNECTOR (COAXIAL)
J501	1-764-243-31 o	CONNECTOR (COAXIAL)
L104	1-481-992-11 s	INDUCTOR 1UH (2520)
L500	1-414-838-21 s	INDUCTOR, CHIP 6.8NH (1005)
L501	1-414-838-21 s	INDUCTOR, CHIP 6.8NH (1005)
L502	1-469-967-21 s	INDUCTOR, CHIP 10UH (2518)
L503	1-469-967-21 s	INDUCTOR, CHIP 10UH (2518)
L504	1-481-175-21 s	INDUCTOR 4.7UH
L800	1-457-838-11 s	CHOKE COIL 1.5UH
L801	1-457-838-11 s	CHOKE COIL 1.5UH
L802	1-457-612-11 s	COIL, CHOKE 0.78UH
L803	1-481-992-11 s	INDUCTOR 1UH (2520)
L804	1-457-838-11 s	CHOKE COIL 1.5UH
L805	1-481-992-11 s	INDUCTOR 1UH (2520)
L806	1-481-992-11 s	INDUCTOR 1UH (2520)
L807	1-481-992-11 s	INDUCTOR 1UH (2520)

HPR-53 BOARD

Ref. No. or Q'ty	Part No.	SP Description
L808	1-481-992-11 s	INDUCTOR 1UH (2520)
L809	1-481-992-11 s	INDUCTOR 1UH (2520)
L817	1-457-838-11 s	CHOKE COIL 1.5UH
L818	1-481-992-11 s	INDUCTOR 1UH (2520)
L1002	1-481-992-11 s	INDUCTOR 1UH (2520)
L1400	1-457-852-11 s	COIL, CHOKE 1.2UH
L1403	1-481-992-11 s	INDUCTOR 1UH (2520)
Q500	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q800	8-729-929-27 s	TRANSISTOR DTC114TE-TL
Q801	8-729-929-27 s	TRANSISTOR DTC114TE-TL
Q804	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q805	8-729-929-27 s	TRANSISTOR DTC114TE-TL
Q808	6-550-750-01 s	TRANSISTOR SSM3K15FS-TE85L
Q809	6-550-750-01 s	TRANSISTOR SSM3K15FS-TE85L
Q810	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q812	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q814	6-550-750-01 s	TRANSISTOR SSM3K15FS-TE85L
Q815	6-550-750-01 s	TRANSISTOR SSM3K15FS-TE85L
Q1400	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q1401	8-729-929-27 s	TRANSISTOR DTC114TE-TL
Q1500	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q1502	8-729-928-82 s	TRANSISTOR DTC144EE-TL
R100	1-218-929-81 s	RES, CHIP 10 (1005)
R101	1-218-929-81 s	RES, CHIP 10 (1005)
R102	1-218-933-81 s	RES, CHIP 22 (1005)
R106	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R107	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R110	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R111	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R112	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R113	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R114	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R115	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R116	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R117	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R118	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R119	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R120	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R121	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R122	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R123	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R124	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R125	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R126	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R127	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R128	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R129	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R130	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R131	1-218-937-81 s	RES, CHIP 47 (1005)
R132	1-218-935-81 s	RES, CHIP 33 (1005)
R133	1-218-941-81 s	RES, CHIP 100 (1005)
R134	1-218-941-81 s	RES, CHIP 100 (1005)
R302	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R303	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R304	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R305	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R306	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R331	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R332	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R357	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R366	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R367	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R400	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R500	1-250-468-11 s	RES, METAL FILM CHIP 75 (1005)

HPR-53 BOARD

Ref. No. or Q'ty	Part No.	SP Description
R501	1-250-468-11 s	RES, METAL FILM CHIP 75 (1005)
R502	1-250-567-11 s	RES, METAL FILM CHIP 1M (1005)
R503	1-250-567-11 s	RES, METAL FILM CHIP 1M (1005)
R504	1-250-468-11 s	RES, METAL FILM CHIP 75 (1005)
R505	1-250-468-11 s	RES, METAL FILM CHIP 75 (1005)
R506	1-250-523-11 o	RES, METAL FILM CHIP 15K(1005)
R507	1-250-457-11 s	RES, METAL FILM CHIP 27 (1005)
R508	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R509	1-250-457-11 s	RES, METAL FILM CHIP 27 (1005)
R510	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R511	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R512	1-250-555-11 s	RES,METAL FILM CHIP 330K(1005)
R513	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R514	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R517	1-250-555-11 s	RES,METAL FILM CHIP 330K(1005)
R518	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R519	1-250-513-11 o	RES,METAL FILM CHIP 5.6K(1005)
R521	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R522	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R523	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R524	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R527	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R528	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R704	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R707	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R710	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R726	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R800	1-218-965-81 s	RES, CHIP 10K (1005)
R801	1-218-963-81 s	RES, CHIP 6.8K (1005)
R802	1-250-551-11 s	RES,METAL FILM CHIP 220K(1005)
R803	1-218-959-81 s	RES, CHIP 3.3K (1005)
R804	1-218-961-81 s	RES, CHIP 4.7K (1005)
R805	1-218-933-81 s	RES, CHIP 22 (1005)
R806	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R807	1-218-961-81 s	RES, CHIP 4.7K (1005)
R808	1-218-947-11 s	RES, CHIP 330 (1005)
R810	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R811	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R812	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R813	1-218-965-81 s	RES, CHIP 10K (1005)
R814	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R815	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R817	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R818	1-250-567-11 s	RES, METAL FILM CHIP 1M (1005)
R819	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R820	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R821	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R822	1-250-523-11 o	RES, METAL FILM CHIP 15K(1005)
R823	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R824	1-218-965-81 s	RES, CHIP 10K (1005)
R825	1-250-523-11 o	RES, METAL FILM CHIP 15K(1005)
R826	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R827	1-250-531-11 s	RES, METAL FILM CHIP 33K(1005)
R828	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R829	1-250-567-11 s	RES, METAL FILM CHIP 1M (1005)
R830	1-218-961-81 s	RES, CHIP 4.7K (1005)
R831	1-250-567-11 s	RES, METAL FILM CHIP 1M (1005)
R832	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R833	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R834	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R835	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R836	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R837	1-218-961-81 s	RES, CHIP 4.7K (1005)
R838	1-250-567-11 s	RES, METAL FILM CHIP 1M (1005)
R839	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)

HPR-53 BOARD

Ref. No. or Q'ty	Part No.	SP Description
R840	1-218-965-81 s	RES, CHIP 10K (1005)
R841	1-250-523-11 o	RES, METAL FILM CHIP 15K(1005)
R842	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R843	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R844	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R845	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R846	1-218-965-81 s	RES, CHIP 10K (1005)
R848	1-250-487-11 s	RES, METAL FILM CHIP 470(1005)
R849	1-220-230-91 s	RES,SQUARE TYPE CHIP 2.2(3225)
R852	1-250-487-11 s	RES, METAL FILM CHIP 470(1005)
R853	1-250-487-11 s	RES, METAL FILM CHIP 470(1005)
R890	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R891	1-250-531-11 s	RES, METAL FILM CHIP 33K(1005)
R892	1-250-487-11 s	RES, METAL FILM CHIP 470(1005)
R893	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R895	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R900	1-218-929-81 s	RES, CHIP 10 (1005)
R901	1-218-929-81 s	RES, CHIP 10 (1005)
R902	1-218-929-81 s	RES, CHIP 10 (1005)
R903	1-218-929-81 s	RES, CHIP 10 (1005)
R1000	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R1002	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R1003	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R1100	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R1101	1-257-199-11 s	RES, METAL FILM CHIP 47 (0603)
R1102	1-257-199-11 s	RES, METAL FILM CHIP 47 (0603)
R1103	1-257-199-11 s	RES, METAL FILM CHIP 47 (0603)
R1104	1-257-199-11 s	RES, METAL FILM CHIP 47 (0603)
R1105	1-218-929-81 s	RES, CHIP 10 (1005)
R1106	1-218-929-81 s	RES, CHIP 10 (1005)
R1200	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R1201	1-257-199-11 s	RES, METAL FILM CHIP 47 (0603)
R1202	1-257-199-11 s	RES, METAL FILM CHIP 47 (0603)
R1203	1-257-199-11 s	RES, METAL FILM CHIP 47 (0603)
R1204	1-257-199-11 s	RES, METAL FILM CHIP 47 (0603)
R1300	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R1301	1-257-199-11 s	RES, METAL FILM CHIP 47 (0603)
R1302	1-257-199-11 s	RES, METAL FILM CHIP 47 (0603)
R1303	1-257-199-11 s	RES, METAL FILM CHIP 47 (0603)
R1304	1-257-199-11 s	RES, METAL FILM CHIP 47 (0603)
R1305	1-257-191-11 s	RES, METAL FILM CHIP 22 (0603)
R1306	1-257-191-11 s	RES, METAL FILM CHIP 22 (0603)
R1400	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R1401	1-250-531-11 s	RES, METAL FILM CHIP 33K(1005)
R1402	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R1403	1-250-567-11 s	RES, METAL FILM CHIP 1M (1005)
R1404	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R1405	1-250-567-11 s	RES, METAL FILM CHIP 1M (1005)
R1406	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R1407	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R1408	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R1409	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R1500	1-218-929-81 s	RES, CHIP 10 (1005)
R1501	1-257-191-11 s	RES, METAL FILM CHIP 22 (0603)
R1502	1-257-191-11 s	RES, METAL FILM CHIP 22 (0603)
R1503	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R1504	1-257-195-11 s	RES, METAL FILM CHIP 33 (0603)
R1505	1-257-195-11 s	RES, METAL FILM CHIP 33 (0603)
R1506	1-257-195-11 s	RES, METAL FILM CHIP 33 (0603)
R1507	1-257-195-11 s	RES, METAL FILM CHIP 33 (0603)
R1508	1-250-480-11 o	RES, METAL FILM CHIP 240(1005)
R1509	1-257-200-11 s	RES, METAL FILM CHIP 51 (0603)
R1510	1-257-200-11 s	RES, METAL FILM CHIP 51 (0603)
R1511	1-257-195-11 s	RES, METAL FILM CHIP 33 (0603)
R1512	1-257-195-11 s	RES, METAL FILM CHIP 33 (0603)

HPR-53 BOARD

Ref. No. or Q'ty	Part No.	SP Description
R1513	1-250-480-11 o	RES, METAL FILM CHIP 240 (1005)
R1514	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R1515	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R1516	1-250-511-11 o	RES, METAL FILM CHIP 4.7K (1005)
R1517	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R1518	1-250-471-11 s	RES, METAL FILM CHIP 100 (1005)
R1519	1-250-567-11 s	RES, METAL FILM CHIP 1M (1005)
R1520	1-250-567-11 s	RES, METAL FILM CHIP 1M (1005)
R1521	1-250-519-11 s	RES, METAL FILM CHIP 10K (1005)
R1522	1-250-519-11 s	RES, METAL FILM CHIP 10K (1005)
R1523	1-250-519-11 s	RES, METAL FILM CHIP 10K (1005)
R1524	1-250-471-11 s	RES, METAL FILM CHIP 100 (1005)
R1525	1-250-471-11 s	RES, METAL FILM CHIP 100 (1005)
R1551	1-250-519-11 s	RES, METAL FILM CHIP 10K (1005)
R1552	1-250-519-11 s	RES, METAL FILM CHIP 10K (1005)
R1553	1-257-195-11 s	RES, METAL FILM CHIP 33 (0603)
R1554	1-257-195-11 s	RES, METAL FILM CHIP 33 (0603)
R1555	1-257-195-11 s	RES, METAL FILM CHIP 33 (0603)
R1556	1-257-195-11 s	RES, METAL FILM CHIP 33 (0603)
R1557	1-257-195-11 s	RES, METAL FILM CHIP 33 (0603)
R1558	1-257-195-11 s	RES, METAL FILM CHIP 33 (0603)
R1559	1-257-195-11 s	RES, METAL FILM CHIP 33 (0603)
R1560	1-257-195-11 s	RES, METAL FILM CHIP 33 (0603)
R1561	1-257-195-11 s	RES, METAL FILM CHIP 33 (0603)
R1562	1-257-195-11 s	RES, METAL FILM CHIP 33 (0603)
R1563	1-257-195-11 s	RES, METAL FILM CHIP 33 (0603)
R1564	1-257-195-11 s	RES, METAL FILM CHIP 33 (0603)
R1565	1-257-195-11 s	RES, METAL FILM CHIP 33 (0603)
R1566	1-257-195-11 s	RES, METAL FILM CHIP 33 (0603)
R1567	1-257-195-11 s	RES, METAL FILM CHIP 33 (0603)
R1568	1-257-195-11 s	RES, METAL FILM CHIP 33 (0603)
R1569	1-257-195-11 s	RES, METAL FILM CHIP 33 (0603)
RB800	1-234-377-21 s	RES, NETWORK 4.7K (1005X4)
RB801	1-234-377-21 s	RES, NETWORK 4.7K (1005X4)
RB1000	1-234-377-21 s	RES, NETWORK 4.7K (1005X4)
TP104	1-780-638-22 s	CONTACT TERMINAL
TP105	1-780-638-22 s	CONTACT TERMINAL
TP700	1-535-877-22 s	CHIP, CHECKER
TP701	1-535-877-22 s	CHIP, CHECKER
TP702	1-535-877-22 s	CHIP, CHECKER
VDR500	1-802-245-11 s	ESD SUPPRESSOR
X100	1-814-185-11 s	OSCILLATOR, CRYSTAL
X300	1-814-597-11 s	OSCILLATOR, CRYSTAL (33.333MHZ)
X1500	1-813-824-11 s	OSCILLATOR, CRYSTAL

IF-1209 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C100	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C101	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C102	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C121	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C122	1-100-581-81 s	CAP, CHIP CERAMIC 0.0047MF B1005
C136	1-112-746-11 s	CAP, CERAMIC 4.7MF B (1608)
C137	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C138	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C139	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C140	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C141	1-112-746-11 s	CAP, CERAMIC 4.7MF B (1608)
C142	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C143	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005

IF-1209 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C144	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C145	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C146	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C147	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C148	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C149	1-112-746-11 s	CAP, CERAMIC 4.7MF B (1608)
C150	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C151	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C152	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C153	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C154	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C155	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C156	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C157	1-112-746-11 s	CAP, CERAMIC 4.7MF B (1608)
C158	1-112-746-11 s	CAP, CERAMIC 4.7MF B (1608)
C159	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C160	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C161	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C162	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C163	1-116-713-11 s	CAP, CERAMIC 22MF X5R 2012
C164	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C165	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C166	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C167	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C168	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C169	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C170	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C171	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C172	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C173	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C174	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C175	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C176	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C177	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C178	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C179	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C180	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C181	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C301	1-114-214-81 s	CAP, CHIP CERAMIC 470PF CH1005
C302	1-112-746-11 s	CAP, CERAMIC 4.7MF B (1608)
C303	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C304	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C305	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C306	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C307	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C308	1-100-567-81 s	CAP, CHIP CERAMIC 0.01MF B 1005
C309	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C310	1-112-746-11 s	CAP, CERAMIC 4.7MF B (1608)
C311	1-116-045-91 s	CAP, CERAMIC 4.7MF B 2012
C312	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C313	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C314	1-112-746-11 s	CAP, CERAMIC 4.7MF B (1608)
C315	1-112-746-11 s	CAP, CERAMIC 4.7MF B (1608)
C316	1-114-817-11 s	CAP, CERAMIC 2.2UF X7R 3216
C318	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C319	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C320	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C321	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C322	1-118-040-11 s	CAP, CERAMIC 2.2MF X5R (1608)
C323	1-118-040-11 s	CAP, CERAMIC 2.2MF X5R (1608)
C324	1-114-813-11 s	CAP, CERAMIC 1UF X7R 1608
C325	1-118-040-11 s	CAP, CERAMIC 2.2MF X5R (1608)
C326	1-114-813-11 s	CAP, CERAMIC 1UF X7R 1608
C327	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C328	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)

IF-1209 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C329	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C330	1-118-040-11 s	CAP, CERAMIC 2.2MF X5R (1608)
C331	1-118-040-11 s	CAP, CERAMIC 2.2MF X5R (1608)
C332	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C333	1-116-729-11 s	CAP, CERAMIC 2.2MF X5R 1608
C334	1-116-729-11 s	CAP, CERAMIC 2.2MF X5R 1608
C335	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
CN100	1-822-974-11 s	CONNECTOR, COAXIAL 40P
CN101	1-843-070-61 s	CONNECTOR, FPC (LIF (NON-ZIF))
CN300	1-842-522-21 o	CONNECTOR, FPC (ZIF) 61P
D300	8-719-065-59 s	DIODE MBR0530T1
D301	6-503-737-01 s	DI CES520
D302	6-503-737-01 s	DI CES520
D303	6-503-737-01 s	DI CES520
E100	1-535-757-21 s	CHIP, CHECKER
FB102	1-400-462-21 s	FERRITE, EMI (SMD) (1005)
FB103	1-400-462-21 s	FERRITE, EMI (SMD) (1005)
FB105	1-400-462-21 s	FERRITE, EMI (SMD) (1005)
FB106	1-400-462-21 s	FERRITE, EMI (SMD) (1005)
FB107	1-400-462-21 s	FERRITE, EMI (SMD) (1005)
FB300	1-400-462-21 s	FERRITE, EMI (SMD) (1005)
FB301	1-400-462-21 s	FERRITE, EMI (SMD) (1005)
FB302	1-400-462-21 s	FERRITE, EMI (SMD) (1005)
FB303	1-400-462-21 s	FERRITE, EMI (SMD) (1005)
FB304	1-400-462-21 s	FERRITE, EMI (SMD) (1005)
IC102	6-704-643-01 s	IC R3112N221A-TR-FE
IC301	6-708-882-01 s	IC BH18MA3WHFV-TR
L300	1-481-036-11 s	INDUCTOR (4.7UH)
L301	1-481-035-11 s	INDUCTOR (10UH)
PS100	1-576-122-21 s	LINK, IC (0.4A/72V)
PS101	1-576-122-21 s	LINK, IC (0.4A/72V)
Q100	8-729-929-09 s	TRANSISTOR DTC123JE-TL
Q101	8-729-929-09 s	TRANSISTOR DTC123JE-TL
Q300	8-729-929-09 s	TRANSISTOR DTC123JE-TL
Q301	8-729-929-09 s	TRANSISTOR DTC123JE-TL
Q302	6-552-484-01 s	TR RE1C0022PFU7TL
Q303	6-552-484-01 s	TR RE1C0022PFU7TL
R100	1-218-965-81 s	RES, CHIP 10K (1005)
R103	1-218-957-81 s	RES, CHIP 2.2K (1005)
R108	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R109	1-218-965-81 s	RES, CHIP 10K (1005)
R111	1-218-965-81 s	RES, CHIP 10K (1005)
R119	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R120	1-218-961-81 s	RES, CHIP 4.7K (1005)
R121	1-218-947-11 s	RES, CHIP 330 (1005)
R122	1-218-961-81 s	RES, CHIP 4.7K (1005)
R123	1-218-961-81 s	RES, CHIP 4.7K (1005)
R124	1-218-959-81 s	RES, CHIP 3.3K (1005)
R125	1-218-959-81 s	RES, CHIP 3.3K (1005)
R126	1-218-961-81 s	RES, CHIP 4.7K (1005)
R127	1-218-933-81 s	RES, CHIP 22 (1005)
R300	1-218-965-81 s	RES, CHIP 10K (1005)
R301	1-250-517-11 s	RES, METAL FILM CHIP 8.2K (1005)
R302	1-218-929-81 s	RES, CHIP 10 (1005)
R303	1-250-531-11 s	RES, METAL FILM CHIP 33K (1005)
R305	1-250-531-11 s	RES, METAL FILM CHIP 33K (1005)
R306	1-250-531-11 s	RES, METAL FILM CHIP 33K (1005)
R307	1-218-965-81 s	RES, CHIP 10K (1005)
R308	1-250-503-11 o	RES, METAL FILM CHIP 2.2K (1005)
R309	1-218-967-81 s	RES, CHIP 15K (1005)
R312	1-218-965-81 s	RES, CHIP 10K (1005)

IF-1209 BOARD

Ref. No. or Q'ty	Part No.	SP Description
R313	1-218-965-81 s	RES, CHIP 10K (1005)
R316	1-218-953-81 s	RES, CHIP 1.0K (1005)
R317	1-218-953-81 s	RES, CHIP 1.0K (1005)
R318	1-218-965-81 s	RES, CHIP 10K (1005)
R319	1-218-965-81 s	RES, CHIP 10K (1005)
R320	1-218-929-81 s	RES, CHIP 10 (1005)
RB100	1-234-376-21 s	RES, NETWORK 2.2K (1005X4)
RB101	1-234-377-21 s	RES, NETWORK 4.7K (1005X4)

IO-275 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-2054-866-A s	MOUNTED CIRCUIT BOARD, IO-275
1pc	4-446-014-01 s	TAPE AS
C2	1-118-345-11 s	CAP, CERAMIC 0.01MF B 1608
CN1	1-766-380-11 s	CONNECTOR, COAXIAL (BNC TIPE)
CN2	1-766-380-11 s	CONNECTOR, COAXIAL (BNC TIPE)
CN3	1-766-380-11 s	CONNECTOR, COAXIAL (BNC TIPE)
CN4	1-766-380-11 s	CONNECTOR, COAXIAL (BNC TIPE)
CN5	1-779-268-21 o	PIN, CONNECTOR (1.5MM) (SMD) 11P
D1	1-805-774-21 s	VARISTOR, CHIP
D2	1-805-774-21 s	VARISTOR, CHIP
FB1	1-414-445-21 s	FERRITE, EMI (SMD) (1608)
FB2	1-414-445-21 s	FERRITE, EMI (SMD) (1608)
FB3	1-414-445-21 s	FERRITE, EMI (SMD) (1608)
FB4	1-400-462-21 s	FERRITE, EMI (SMD) (1005)
FB5	1-400-462-21 s	FERRITE, EMI (SMD) (1005)
FL1	1-482-155-11 s	SMD EMI FILTER
FL2	1-482-155-11 s	SMD EMI FILTER
R3	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R4	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R5	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R6	1-218-990-81 s	CONDUCTOR, CHIP (1005)

KY-736 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-2054-867-A s	MOUNTED CIRCUIT BOARD, KY-736
C1	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
CN1	1-764-007-21 o	PIN, CONNECTOR (SMD) 12P
D1	8-719-077-09 s	DIODE CL-196HR-CD-T
D2	8-719-077-09 s	DIODE CL-196HR-CD-T
D3	8-719-077-09 s	DIODE CL-196HR-CD-T
Q1	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q2	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q3	8-729-928-82 s	TRANSISTOR DTC144EE-TL
R1	1-250-483-11 s	RES, METAL FILM CHIP 330 (1005)
R2	1-250-483-11 s	RES, METAL FILM CHIP 330 (1005)
R3	1-250-483-11 s	RES, METAL FILM CHIP 330 (1005)
S1	1-572-725-11 s	SWITCH, TACTILE
S2	1-572-725-11 s	SWITCH, TACTILE
S3	1-572-725-11 s	SWITCH, TACTILE
S4	1-572-725-11 s	SWITCH, TACTILE

KY-736 BOARD

Ref. No. or Q'ty	Part No.	SP Description
S5	1-572-725-11 s	SWITCH, TACTILE
S6	1-572-725-11 s	SWITCH, TACTILE

LED-529 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-2054-870-A s	MOUNTED CIRCUIT BOARD, LED-529
C001	1-116-705-11 s	CAP, CERAMIC 47MF X5R 3225
C002	1-116-705-11 s	CAP, CERAMIC 47MF X5R 3225
C003	1-116-705-11 s	CAP, CERAMIC 47MF X5R 3225
C004	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C005	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
CN001	1-822-466-21 o	CONNECTOR, COAXIAL (RECEPTACLE)
CN002	1-842-535-11 s	USB3.0 CONNECTOR
CN003	1-784-010-11 s	CONNECTOR, USB (B)
D001	8-719-077-09 s	DIODE CL-196HR-CD-T
FB001	1-400-580-21 s	FERRITE, EMI (SMD)
L001	1-457-223-11 s	COMMON MODE CHOKE COIL
L002	1-457-223-11 s	COMMON MODE CHOKE COIL
L003	1-460-671-11 s	COMMON MODE CHOKE COIL
L004	1-460-671-11 s	COMMON MODE CHOKE COIL
S001	1-570-608-11 s	SWITCH, TOGGLE
VDR001	1-802-245-11 s	ESD SUPPRESSOR
VDR002	1-802-245-11 s	ESD SUPPRESSOR
VDR003	1-802-245-11 s	ESD SUPPRESSOR
VDR004	1-802-245-11 s	ESD SUPPRESSOR
VDR005	1-802-245-11 s	ESD SUPPRESSOR
VDR006	1-802-245-11 s	ESD SUPPRESSOR

MB-1210 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-2058-423-A s	MOUNTED CIRCUIT BOARD, MB-1210
C001	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C002	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C003	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C004	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C005	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C006	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C007	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C008	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C009	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C010	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C011	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C012	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C013	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C014	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C015	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C016	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C017	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C018	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C019	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C020	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C021	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005

MB-1210 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C022	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C023	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
CN4	1-784-625-31 s	CONNECTOR, FFC/FPC (ZIF) AN 30P
CN5	1-766-383-21 s	PIN, CONNECTOR (1.5MM) (SMD) 12P
CN6	1-793-027-21 s	CONNECTOR 14P
CN7	1-822-411-21 s	CONNECTOR, CARD
CN8	1-785-946-21 s	CONNECTOR 3P
CN9	1-766-376-21 s	PIN, CONNECTOR (1.5MM) (SMD) 9P
CN10	1-785-125-21 s	CONNECTOR 6P
CN11	1-784-625-31 s	CONNECTOR, FFC/FPC (ZIF) AN 30P
CN12	1-770-470-21 s	PIN, CONNECTOR (PC BOARD) 6P
CN13	1-691-550-21 s	PIN, CONNECTOR (1.5MM) (SMD) 3P
CN14	1-766-383-21 s	PIN, CONNECTOR (1.5MM) (SMD) 12P
CN15	1-779-268-21 o	PIN, CONNECTOR (1.5MM) (SMD) 11P
CN16	1-691-591-21 o	PIN, CONNECTOR (1.5MM) (SMD) 8P
CN17	1-770-469-21 s	PIN, CONNECTOR (PC BOARD) 2P
CN18	1-817-097-21 s	PIN, CONNECTOR (1.5MM) (SMD) 13P
CN19	1-695-320-21 o	PIN, CONNECTOR (1.5MM) (SMD) 2P
CN20	1-785-207-51 s	HOUSING, CONNECTOR 25P
CN21	1-785-207-51 s	HOUSING, CONNECTOR 25P
CN22	1-785-207-51 s	HOUSING, CONNECTOR 25P
CN23	1-770-623-21 s	PIN, CONNECTOR 6P
D001	8-719-085-26 s	DIODE CL-165HR/SYG-D-T
ET001	1-780-569-11 s	TERMINAL (ON BOARD CONTACT)
ET002	1-780-569-11 s	TERMINAL (ON BOARD CONTACT)
ET003	1-780-569-11 s	TERMINAL (ON BOARD CONTACT)
ET004	1-780-569-11 s	TERMINAL (ON BOARD CONTACT)
ET005	1-780-569-11 s	TERMINAL (ON BOARD CONTACT)
ET006	1-780-569-11 s	TERMINAL (ON BOARD CONTACT)
ET007	1-780-569-11 s	TERMINAL (ON BOARD CONTACT)
ET008	1-854-134-11 s	TAP, THROUGH-HOLE
ET009	1-854-134-11 s	TAP, THROUGH-HOLE
ET010	1-854-134-11 s	TAP, THROUGH-HOLE
ET011	1-854-134-11 s	TAP, THROUGH-HOLE
FB001	1-400-725-21 s	FERRITE, EMI (SMD) (1005)
FB002	1-400-725-21 s	FERRITE, EMI (SMD) (1005)
FB003	1-400-725-21 s	FERRITE, EMI (SMD) (1005)
FB004	1-400-725-21 s	FERRITE, EMI (SMD) (1005)
FB005	1-400-725-21 s	FERRITE, EMI (SMD) (1005)
FB006	1-400-725-21 s	FERRITE, EMI (SMD) (1005)
FB007	1-400-725-21 s	FERRITE, EMI (SMD) (1005)
FB008	1-400-725-21 s	FERRITE, EMI (SMD) (1005)

Q001	8-729-929-09 s	TRANSISTOR DTC123JE-TL
Q002	8-729-929-09 s	TRANSISTOR DTC123JE-TL
R001	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R002	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)

PA-422 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1.15pcs	9-910-999-SI s	SOLDER (F3M705,D0.8) 1.0KG
C001	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C002	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C003	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C004	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C005	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C006	1-118-403-11 s	CAP, CERAMIC 1000PF X7R 1005
C007	1-116-717-11 s	CAP, CERAMIC 10MF X5R 2012
C008	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005

PA-422 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C009	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C010	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C011	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C012	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C013	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C014	1-118-403-11 s	CAP, CERAMIC 1000PF X7R 1005
C015	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C016	1-116-717-11 s	CAP, CERAMIC 10MF X5R 2012
C017	1-116-346-11 s	CAP, ELECT 47MF 105
C018	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C019	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C020	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C022	1-118-046-11 s	CAP, CERAMIC 4.7MF X5R (2012)
C023	1-118-046-11 s	CAP, CERAMIC 4.7MF X5R (2012)
C024	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C025	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C026	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C027	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C028	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C029	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C030	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C031	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C032	1-118-347-11 s	CAP, CHIP CERAMIC 0.1MF B 1608
C033	1-118-046-11 s	CAP, CERAMIC 4.7MF X5R (2012)
C034	1-118-046-11 s	CAP, CERAMIC 4.7MF X5R (2012)
C035	1-116-117-11 s	CAP, ELECT 22MF 105
C039	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C040	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C044	1-118-046-11 s	CAP, CERAMIC 4.7MF X5R (2012)
C050	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C051	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C052	1-116-346-11 s	CAP, ELECT 47MF 105
C053	1-116-717-11 s	CAP, CERAMIC 10MF X5R 2012
C054	1-116-717-11 s	CAP, CERAMIC 10MF X5R 2012
C055	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C056	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C057	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C058	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C059	1-135-646-91 s	CAP, CHIP FILM 1MF
C060	1-135-646-91 s	CAP, CHIP FILM 1MF
C061	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C062	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C063	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C064	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C065	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C066	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C067	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C068	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C069	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C070	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C071	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C072	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C073	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C074	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C075	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C076	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C077	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C078	1-114-548-11 s	CAP, NIOBIUM ELECT 22UF
C079	1-114-548-11 s	CAP, NIOBIUM ELECT 22UF
C080	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C081	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C082	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C083	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C084	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C085	1-114-548-11 s	CAP, NIOBIUM ELECT 22UF

PA-422 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C086	1-135-646-91 s	CAP, CHIP FILM 1MF
C087	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C088	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C089	1-114-548-11 s	CAP, NIOBIUM ELECT 22UF
C090	1-135-646-91 s	CAP, CHIP FILM 1MF
C091	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C092	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C093	1-164-850-81 s	CAP, CHIP CERAMIC 10PF CH 1005
C094	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C095	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C096	1-164-850-81 s	CAP, CHIP CERAMIC 10PF CH 1005
C097	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C098	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C102	1-135-646-91 s	CAP, CHIP FILM 1MF
C104	1-135-646-91 s	CAP, CHIP FILM 1MF
D001	6-503-363-01 s	DI DB2S31400K8
D002	8-719-989-04 s	DIODE DAN222-TL
D003	6-503-363-01 s	DI DB2S31400K8
D004	6-503-363-01 s	DI DB2S31400K8
D005	6-501-123-01 s	DIODE RB160M-60TR
FB003	1-400-334-21 s	FERRITE, EMI (SMD) (1608)
FB004	1-400-334-21 s	FERRITE, EMI (SMD) (1608)
FB005	1-400-334-21 s	FERRITE, EMI (SMD) (1608)
FB006	1-400-334-21 s	FERRITE, EMI (SMD) (1608)
FB007	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB008	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB009	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB010	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB011	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB012	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB013	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
IC002	8-759-672-76 s	IC AK9813BF-E2
IC004	8-753-240-64 s	IC CXA3647CR-T4
IC005	8-753-240-64 s	IC CXA3647CR-T4
IC006	6-711-915-01 s	IC LM73CIMK-0
Q001	8-729-015-48 s	TRANSISTOR 2SK1062 (TE85L)
R003	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R004	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R005	1-250-495-11 s	RES, METAL FILM CHIP 1.0K(1005)
R006	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R007	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R008	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R009	1-250-495-11 s	RES, METAL FILM CHIP 1.0K(1005)
R010	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R011	1-250-543-11 o	RES, METAL FILM CHIP 100K(1005)
R012	1-250-495-11 s	RES, METAL FILM CHIP 1.0K(1005)
R013	1-250-567-11 s	RES, METAL FILM CHIP 1M (1005)
R014	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R015	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R016	1-250-487-11 s	RES, METAL FILM CHIP 470(1005)
R017	1-250-515-11 s	RES, METAL FILM CHIP 6.8K(1005)
R019	1-250-503-11 o	RES, METAL FILM CHIP 2.2K(1005)
R022	1-250-483-11 s	RES, METAL FILM CHIP 330(1005)
R023	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R024	1-250-483-11 s	RES, METAL FILM CHIP 330(1005)
R029	1-250-511-11 o	RES, METAL FILM CHIP 4.7K(1005)
R030	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R031	1-250-495-11 s	RES, METAL FILM CHIP 1.0K(1005)
R032	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R041	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R042	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R045	1-250-495-11 s	RES, METAL FILM CHIP 1.0K(1005)
R046	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)

PA-422 BOARD

Ref. No. or Q'ty	Part No.	SP Description
R047	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R048	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R049	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R050	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R051	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R053	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R054	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R055	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R056	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R057	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R059	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R061	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R062	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R065	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R066	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R070	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R071	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R074	1-216-864-91 s	CONDUCTOR, CHIP (1608)
R075	1-216-864-91 s	CONDUCTOR, CHIP (1608)
R076	1-216-864-91 s	CONDUCTOR, CHIP (1608)
R077	1-216-864-91 s	CONDUCTOR, CHIP (1608)
R078	1-216-864-91 s	CONDUCTOR, CHIP (1608)
R079	1-216-864-91 s	CONDUCTOR, CHIP (1608)
TP001	1-535-757-21 s	CHIP, CHECKER

PA-423 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1.15pcs	9-910-999-SI s	SOLDER (F3M705,D0.8) 1.0KG
C001	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C002	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C003	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C004	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C005	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C006	1-118-403-11 s	CAP, CERAMIC 1000PF X7R 1005
C007	1-116-717-11 s	CAP, CERAMIC 10MF X5R 2012
C008	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C009	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C010	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C011	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C012	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C013	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C014	1-118-403-11 s	CAP, CERAMIC 1000PF X7R 1005
C015	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C016	1-116-717-11 s	CAP, CERAMIC 10MF X5R 2012
C017	1-116-346-11 s	CAP, ELECT 47MF 105
C018	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C019	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C020	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C022	1-118-046-11 s	CAP, CERAMIC 4.7MF X5R (2012)
C023	1-118-046-11 s	CAP, CERAMIC 4.7MF X5R (2012)
C024	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C025	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C026	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C027	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C028	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C029	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C030	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C031	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C032	1-118-347-11 s	CAP, CHIP CERAMIC 0.1MF B 1608
C033	1-118-046-11 s	CAP, CERAMIC 4.7MF X5R (2012)

PA-423 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C034	1-118-046-11 s	CAP, CERAMIC 4.7MF X5R (2012)
C035	1-116-117-11 s	CAP, ELECT 22MF 105
C039	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C040	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C044	1-118-046-11 s	CAP, CERAMIC 4.7MF X5R (2012)
C050	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C051	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C052	1-116-346-11 s	CAP, ELECT 47MF 105
C053	1-116-717-11 s	CAP, CERAMIC 10MF X5R 2012
C054	1-116-717-11 s	CAP, CERAMIC 10MF X5R 2012
C055	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C056	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C057	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C058	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C059	1-135-646-91 s	CAP, CHIP FILM 1MF
C060	1-135-646-91 s	CAP, CHIP FILM 1MF
C061	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C062	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C063	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C064	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C065	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C066	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C067	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C068	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C069	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C070	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C071	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C072	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C074	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C075	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C076	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C077	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C078	1-114-548-11 s	CAP, NIOBIUM ELECT 22UF
C079	1-114-548-11 s	CAP, NIOBIUM ELECT 22UF
C080	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C081	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C082	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C083	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C084	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C085	1-114-548-11 s	CAP, NIOBIUM ELECT 22UF
C086	1-135-646-91 s	CAP, CHIP FILM 1MF
C087	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C088	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C089	1-114-548-11 s	CAP, NIOBIUM ELECT 22UF
C090	1-135-646-91 s	CAP, CHIP FILM 1MF
C091	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C092	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C093	1-164-850-81 s	CAP, CHIP CERAMIC 10PF CH 1005
C094	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C095	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C096	1-164-850-81 s	CAP, CHIP CERAMIC 10PF CH 1005
C097	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C098	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C102	1-135-646-91 s	CAP, CHIP FILM 1MF
C104	1-135-646-91 s	CAP, CHIP FILM 1MF
D001	6-503-363-01 s	DI DB2S31400K8
D002	8-719-989-04 s	DIODE DAN222-TL
D003	6-503-363-01 s	DI DB2S31400K8
D004	6-503-363-01 s	DI DB2S31400K8
D005	6-501-123-01 s	DIODE RB160M-60TR
FB003	1-400-334-21 s	FERRITE, EMI (SMD) (1608)
FB004	1-400-334-21 s	FERRITE, EMI (SMD) (1608)
FB005	1-400-334-21 s	FERRITE, EMI (SMD) (1608)
FB006	1-400-334-21 s	FERRITE, EMI (SMD) (1608)

PA-423 BOARD

Ref. No. or Q'ty	Part No.	SP Description
FB007	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB008	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB009	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB010	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB011	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB012	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB013	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
IC002	8-759-672-76 s	IC AK9813BF-E2
IC004	8-753-240-64 s	IC CXA3647CR-T4
IC005	8-753-240-64 s	IC CXA3647CR-T4
Q001	8-729-015-48 s	TRANSISTOR 2SK1062 (TE85L)
R003	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R004	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R005	1-250-495-11 s	RES, METAL FILM CHIP 1.0K(1005)
R006	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R007	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R008	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R009	1-250-495-11 s	RES, METAL FILM CHIP 1.0K(1005)
R010	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R011	1-250-543-11 o	RES, METAL FILM CHIP 100K(1005)
R012	1-250-495-11 s	RES, METAL FILM CHIP 1.0K(1005)
R013	1-250-567-11 s	RES, METAL FILM CHIP 1M (1005)
R014	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R015	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R016	1-250-487-11 s	RES, METAL FILM CHIP 470(1005)
R017	1-250-515-11 s	RES, METAL FILM CHIP 6.8K(1005)
R019	1-250-503-11 o	RES, METAL FILM CHIP 2.2K(1005)
R022	1-250-483-11 s	RES, METAL FILM CHIP 330(1005)
R023	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R024	1-250-483-11 s	RES, METAL FILM CHIP 330(1005)
R029	1-250-511-11 o	RES, METAL FILM CHIP 4.7K(1005)
R030	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R031	1-250-495-11 s	RES, METAL FILM CHIP 1.0K(1005)
R032	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R041	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R042	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R045	1-250-495-11 s	RES, METAL FILM CHIP 1.0K(1005)
R046	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R047	1-250-495-11 s	RES, METAL FILM CHIP 1.0K(1005)
R048	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R051	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R053	1-250-511-11 o	RES, METAL FILM CHIP 4.7K(1005)
R054	1-250-511-11 o	RES, METAL FILM CHIP 4.7K(1005)
R055	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R056	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R057	1-250-495-11 s	RES, METAL FILM CHIP 1.0K(1005)
R059	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R061	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R062	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R065	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R066	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R070	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R071	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R074	1-216-864-91 s	CONDUCTOR, CHIP (1608)
R075	1-216-864-91 s	CONDUCTOR, CHIP (1608)
R076	1-216-864-91 s	CONDUCTOR, CHIP (1608)
R077	1-216-864-91 s	CONDUCTOR, CHIP (1608)
R078	1-216-864-91 s	CONDUCTOR, CHIP (1608)
R079	1-216-864-91 s	CONDUCTOR, CHIP (1608)
TP001	1-535-757-21 s	CHIP, CHECKER

PA-424 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1.15pcs	9-910-999-SI s	SOLDER (F3M705,D0.8) 1.0KG
C001	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C002	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C003	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C004	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C005	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C006	1-118-403-11 s	CAP, CERAMIC 1000PF X7R 1005
C007	1-116-717-11 s	CAP, CERAMIC 10MF X5R 2012
C008	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C009	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C010	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C011	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C012	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C013	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C014	1-118-403-11 s	CAP, CERAMIC 1000PF X7R 1005
C015	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C016	1-116-717-11 s	CAP, CERAMIC 10MF X5R 2012
C017	1-116-346-11 s	CAP, ELECT 47MF 105
C018	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C019	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C020	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C022	1-118-046-11 s	CAP, CERAMIC 4.7MF X5R (2012)
C023	1-118-046-11 s	CAP, CERAMIC 4.7MF X5R (2012)
C024	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C025	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C026	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C027	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C028	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C029	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C030	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C031	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C032	1-118-347-11 s	CAP, CHIP CERAMIC 0.1MF B 1608
C033	1-118-046-11 s	CAP, CERAMIC 4.7MF X5R (2012)
C034	1-118-046-11 s	CAP, CERAMIC 4.7MF X5R (2012)
C035	1-116-117-11 s	CAP, ELECT 22MF 105
C039	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C040	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C044	1-118-046-11 s	CAP, CERAMIC 4.7MF X5R (2012)
C050	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C051	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C052	1-116-346-11 s	CAP, ELECT 47MF 105
C053	1-116-717-11 s	CAP, CERAMIC 10MF X5R 2012
C054	1-116-717-11 s	CAP, CERAMIC 10MF X5R 2012
C055	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C056	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C057	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C058	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C059	1-135-646-91 s	CAP, CHIP FILM 1MF
C060	1-135-646-91 s	CAP, CHIP FILM 1MF
C061	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C062	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C063	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C064	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C065	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C066	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C067	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C068	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C069	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C070	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C071	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C072	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C074	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C075	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C076	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)

PA-424 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C077	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C078	1-114-548-11 s	CAP, NIOBIUM ELECT 22UF
C079	1-114-548-11 s	CAP, NIOBIUM ELECT 22UF
C080	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C081	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C082	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C083	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C084	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C085	1-114-548-11 s	CAP, NIOBIUM ELECT 22UF
C086	1-135-646-91 s	CAP, CHIP FILM 1MF
C087	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C088	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C089	1-114-548-11 s	CAP, NIOBIUM ELECT 22UF
C090	1-135-646-91 s	CAP, CHIP FILM 1MF
C091	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C092	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C093	1-164-850-81 s	CAP, CHIP CERAMIC 10PF CH 1005
C094	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C095	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C096	1-164-850-81 s	CAP, CHIP CERAMIC 10PF CH 1005
C097	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C098	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C102	1-135-646-91 s	CAP, CHIP FILM 1MF
C104	1-135-646-91 s	CAP, CHIP FILM 1MF
D001	6-503-363-01 s	DI DB2S31400K8
D002	8-719-989-04 s	DIODE DAN222-TL
D003	6-503-363-01 s	DI DB2S31400K8
D004	6-503-363-01 s	DI DB2S31400K8
D005	6-501-123-01 s	DIODE RB160M-60TR
FB003	1-400-334-21 s	FERRITE, EMI (SMD) (1608)
FB004	1-400-334-21 s	FERRITE, EMI (SMD) (1608)
FB005	1-400-334-21 s	FERRITE, EMI (SMD) (1608)
FB006	1-400-334-21 s	FERRITE, EMI (SMD) (1608)
FB007	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB008	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB009	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB010	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB011	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB012	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB013	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
IC002	8-759-672-76 s	IC AK9813BF-E2
IC004	8-753-240-64 s	IC CXA3647CR-T4
IC005	8-753-240-64 s	IC CXA3647CR-T4
Q001	8-729-015-48 s	TRANSISTOR 2SK1062 (TE85L)
R003	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R004	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R005	1-250-495-11 s	RES, METAL FILM CHIP 1.0K(1005)
R006	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R007	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R008	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R009	1-250-495-11 s	RES, METAL FILM CHIP 1.0K(1005)
R010	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R011	1-250-543-11 o	RES, METAL FILM CHIP 100K(1005)
R012	1-250-495-11 s	RES, METAL FILM CHIP 1.0K(1005)
R013	1-250-567-11 s	RES, METAL FILM CHIP 1M (1005)
R014	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R015	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R016	1-250-487-11 s	RES, METAL FILM CHIP 470(1005)
R017	1-250-515-11 s	RES, METAL FILM CHIP 6.8K(1005)
R019	1-250-503-11 o	RES, METAL FILM CHIP 2.2K(1005)
R022	1-250-483-11 s	RES, METAL FILM CHIP 330(1005)
R023	1-250-503-11 o	RES, METAL FILM CHIP 2.2K(1005)
R024	1-250-483-11 s	RES, METAL FILM CHIP 330(1005)

PA-424 BOARD

Ref. No. or Q'ty	Part No.	SP Description
R029	1-250-511-11 o	RES, METAL FILM CHIP 4.7K(1005)
R030	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R031	1-250-495-11 s	RES, METAL FILM CHIP 1.0K(1005)
R032	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R041	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R042	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R045	1-250-495-11 s	RES, METAL FILM CHIP 1.0K(1005)
R046	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R047	1-250-495-11 s	RES, METAL FILM CHIP 1.0K(1005)
R048	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R051	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R053	1-250-511-11 o	RES, METAL FILM CHIP 4.7K(1005)
R054	1-250-511-11 o	RES, METAL FILM CHIP 4.7K(1005)
R055	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R056	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R057	1-250-495-11 s	RES, METAL FILM CHIP 1.0K(1005)
R059	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R061	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R062	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R065	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R066	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R070	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R071	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R074	1-216-864-91 s	CONDUCTOR, CHIP (1608)
R075	1-216-864-91 s	CONDUCTOR, CHIP (1608)
R076	1-216-864-91 s	CONDUCTOR, CHIP (1608)
R077	1-216-864-91 s	CONDUCTOR, CHIP (1608)
R078	1-216-864-91 s	CONDUCTOR, CHIP (1608)
R079	1-216-864-91 s	CONDUCTOR, CHIP (1608)
TP001	1-535-757-21 s	CHIP, CHECKER

RE-326 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-2058-419-A s	MOUNTED CIRCUIT BOARD, RE-326
2pcs	3-855-938-01 s	SCREW
0.5pcs	7-600-000-48 s	ADHESIVE AGENT(SC608LV22)180ML
C100	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C102	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C105	1-118-389-11 s	CAP, CERAMIC 0.022MF X7R 1005
C108	1-118-044-11 s	CAP, CERAMIC 1MF X5R (2012)
C109	1-128-403-21 s	CAP, ELECT 47MF 8X6
C110	1-118-036-11 s	CAP, CERAMIC 0.1MF X5R (1608)
C111	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C112	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C113	1-116-865-11 s	CAP, CERAMIC 10MF X5R 3216
C114	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C115	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C116	1-118-037-11 s	CAP, CERAMIC 0.22MF X5R (1608)
C117	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C118	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C120	1-118-036-11 s	CAP, CERAMIC 0.1MF X5R (1608)
C123	1-116-099-11 s	CAP, ELECT 100MF 105
C133	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C134	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C135	1-118-036-11 s	CAP, CERAMIC 0.1MF X5R (1608)
C136	1-118-036-11 s	CAP, CERAMIC 0.1MF X5R (1608)
C137	1-128-403-21 s	CAP, ELECT 47MF 8X6
C139	1-118-036-11 s	CAP, CERAMIC 0.1MF X5R (1608)
C140	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005

RE-326 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C141	1-118-036-11 s	CAP, CERAMIC 0.1MF X5R (1608)
C142	1-118-036-11 s	CAP, CERAMIC 0.1MF X5R (1608)
C143	1-118-036-11 s	CAP, CERAMIC 0.1MF X5R (1608)
C144	1-118-036-11 s	CAP, CERAMIC 0.1MF X5R (1608)
C149	1-118-036-11 s	CAP, CERAMIC 0.1MF X5R (1608)
C150	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C151	1-118-044-11 s	CAP, CERAMIC 1MF X5R (2012)
C152	1-118-036-11 s	CAP, CERAMIC 0.1MF X5R (1608)
C153	1-118-036-11 s	CAP, CERAMIC 0.1MF X5R (1608)
C154	1-118-036-11 s	CAP, CERAMIC 0.1MF X5R (1608)
C155	1-118-044-11 s	CAP, CERAMIC 1MF X5R (2012)
C156	1-118-036-11 s	CAP, CERAMIC 0.1MF X5R (1608)
C157	1-118-036-11 s	CAP, CERAMIC 0.1MF X5R (1608)
C158	1-118-036-11 s	CAP, CERAMIC 0.1MF X5R (1608)
C159	1-118-036-11 s	CAP, CERAMIC 0.1MF X5R (1608)
C160	1-118-036-11 s	CAP, CERAMIC 0.1MF X5R (1608)
C161	1-112-796-11 s	CAP, ELECT 47MF
C162	1-112-796-11 s	CAP, ELECT 47MF
C164	1-118-036-11 s	CAP, CERAMIC 0.1MF X5R (1608)
C167	1-112-796-11 s	CAP, ELECT 47MF
C168	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C200	1-118-395-11 s	CAP, CERAMIC 4700PF X7R 1005
C201	1-118-395-11 s	CAP, CERAMIC 4700PF X7R 1005
C202	1-118-395-11 s	CAP, CERAMIC 4700PF X7R 1005
C203	1-118-395-11 s	CAP, CERAMIC 4700PF X7R 1005
C204	1-116-744-11 s	CAP, CERAMIC 0.22MF X5R 1005
C205	1-116-744-11 s	CAP, CERAMIC 0.22MF X5R 1005
C206	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C207	1-164-882-81 s	CAP,CHIP CERAMIC 220PF CH 1005
C208	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C209	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C210	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C211	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C212	1-116-744-11 s	CAP, CERAMIC 0.22MF X5R 1005
C213	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C214	1-116-744-11 s	CAP, CERAMIC 0.22MF X5R 1005
C215	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C216	1-118-395-11 s	CAP, CERAMIC 4700PF X7R 1005
C217	1-118-395-11 s	CAP, CERAMIC 4700PF X7R 1005
C218	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C219	1-118-395-11 s	CAP, CERAMIC 4700PF X7R 1005
C220	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C221	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C222	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C223	1-118-395-11 s	CAP, CERAMIC 4700PF X7R 1005
C224	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C225	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C226	1-116-865-11 s	CAP, CERAMIC 10MF X5R 3216
C227	1-116-865-11 s	CAP, CERAMIC 10MF X5R 3216
C228	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C229	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C230	1-116-865-11 s	CAP, CERAMIC 10MF X5R 3216
C231	1-116-865-11 s	CAP, CERAMIC 10MF X5R 3216
C232	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C233	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C234	1-116-347-11 s	CAP, ELECT 150MF 105
C235	1-116-347-11 s	CAP, ELECT 150MF 105
C236	1-116-347-11 s	CAP, ELECT 150MF 105
C237	1-116-347-11 s	CAP, ELECT 150MF 105
C238	1-116-713-11 s	CAP, CERAMIC 22MF X5R 2012
C239	1-116-713-11 s	CAP, CERAMIC 22MF X5R 2012
C240	1-116-713-11 s	CAP, CERAMIC 22MF X5R 2012
C241	1-116-713-11 s	CAP, CERAMIC 22MF X5R 2012
C242	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C243	1-116-347-11 s	CAP, ELECT 150MF 105

RE-326 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C244	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C245	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C246	1-116-347-11 s	CAP, ELECT 150MF 105
C247	1-116-347-11 s	CAP, ELECT 150MF 105
C248	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C249	1-164-870-81 s	CAP, CHIP CERAMIC 68PF CH 1005
C250	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C251	1-116-713-11 s	CAP, CERAMIC 22MF X5R 2012
C252	1-116-713-11 s	CAP, CERAMIC 22MF X5R 2012
C300	1-118-395-11 s	CAP, CERAMIC 4700PF X7R 1005
C301	1-118-395-11 s	CAP, CERAMIC 4700PF X7R 1005
C302	1-118-395-11 s	CAP, CERAMIC 4700PF X7R 1005
C303	1-118-395-11 s	CAP, CERAMIC 4700PF X7R 1005
C304	1-116-744-11 s	CAP, CERAMIC 0.22MF X5R 1005
C305	1-116-744-11 s	CAP, CERAMIC 0.22MF X5R 1005
C306	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C308	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C309	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C310	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C311	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C312	1-116-744-11 s	CAP, CERAMIC 0.22MF X5R 1005
C313	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C314	1-116-744-11 s	CAP, CERAMIC 0.22MF X5R 1005
C315	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C316	1-118-395-11 s	CAP, CERAMIC 4700PF X7R 1005
C317	1-118-395-11 s	CAP, CERAMIC 4700PF X7R 1005
C318	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C319	1-118-395-11 s	CAP, CERAMIC 4700PF X7R 1005
C320	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C321	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C322	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C323	1-118-395-11 s	CAP, CERAMIC 4700PF X7R 1005
C324	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C325	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C326	1-116-865-11 s	CAP, CERAMIC 10MF X5R 3216
C327	1-116-865-11 s	CAP, CERAMIC 10MF X5R 3216
C328	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C329	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C330	1-116-865-11 s	CAP, CERAMIC 10MF X5R 3216
C331	1-116-865-11 s	CAP, CERAMIC 10MF X5R 3216
C332	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C333	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C334	1-116-347-11 s	CAP, ELECT 150MF 105
C335	1-116-347-11 s	CAP, ELECT 150MF 105
C336	1-116-105-11 s	CAP, ELECT 68MF 105
C337	1-116-105-11 s	CAP, ELECT 68MF 105
C338	1-116-713-11 s	CAP, CERAMIC 22MF X5R 2012
C339	1-116-713-11 s	CAP, CERAMIC 22MF X5R 2012
C340	1-116-711-11 s	CAP, CERAMIC 22MF X5R 3216
C341	1-116-711-11 s	CAP, CERAMIC 22MF X5R 3216
C400	1-118-395-11 s	CAP, CERAMIC 4700PF X7R 1005
C401	1-118-395-11 s	CAP, CERAMIC 4700PF X7R 1005
C402	1-116-744-11 s	CAP, CERAMIC 0.22MF X5R 1005
C403	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C404	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C405	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C406	1-116-744-11 s	CAP, CERAMIC 0.22MF X5R 1005
C407	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C408	1-118-395-11 s	CAP, CERAMIC 4700PF X7R 1005
C409	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C410	1-118-395-11 s	CAP, CERAMIC 4700PF X7R 1005
C411	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C412	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C413	1-116-865-11 s	CAP, CERAMIC 10MF X5R 3216
C414	1-116-865-11 s	CAP, CERAMIC 10MF X5R 3216

RE-326 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C415	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C416	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C417	1-116-105-11 s	CAP, ELECT 68MF 105
C418	1-116-105-11 s	CAP, ELECT 68MF 105
C419	1-116-739-11 s	CAP, CERAMIC 0.47MF X7R 2012
C420	1-116-713-11 s	CAP, CERAMIC 22MF X5R 2012
C500	1-116-733-11 s	CAP, CERAMIC 1MF X7R 2012
C501	1-118-044-11 s	CAP, CERAMIC 1MF X5R (2012)
C502	1-118-044-11 s	CAP, CERAMIC 1MF X5R (2012)
C503	1-116-733-11 s	CAP, CERAMIC 1MF X7R 2012
C504	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C505	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C511	1-118-036-11 s	CAP, CERAMIC 0.1MF X5R (1608)
C512	1-118-036-11 s	CAP, CERAMIC 0.1MF X5R (1608)
C519	1-100-756-91 s	CAP,CHIPCERAMIC 47000PF B 1608
C520	1-100-756-91 s	CAP,CHIPCERAMIC 47000PF B 1608
C521	1-100-756-91 s	CAP,CHIPCERAMIC 47000PF B 1608
C523	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C524	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C525	1-100-756-91 s	CAP,CHIPCERAMIC 47000PF B 1608
C526	1-100-756-91 s	CAP,CHIPCERAMIC 47000PF B 1608
C600	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C601	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C602	1-116-865-11 s	CAP, CERAMIC 10MF X5R 3216
C603	1-116-865-11 s	CAP, CERAMIC 10MF X5R 3216
C604	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C605	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C606	1-118-036-11 s	CAP, CERAMIC 0.1MF X5R (1608)
C607	1-118-036-11 s	CAP, CERAMIC 0.1MF X5R (1608)
C608	1-164-882-81 s	CAP,CHIP CERAMIC 220PF CH 1005
C609	1-164-882-81 s	CAP,CHIP CERAMIC 220PF CH 1005
C610	1-114-214-81 s	CAP,CHIP CERAMIC470PF CH1005
C611	1-114-214-81 s	CAP,CHIP CERAMIC470PF CH1005
C612	1-116-112-11 s	CAP, ELECT 68MF 105
C613	1-116-112-11 s	CAP, ELECT 68MF 105
C614	1-164-866-81 s	CAP, CHIP CERAMIC 47PF CH 1005
C615	1-164-866-81 s	CAP, CHIP CERAMIC 47PF CH 1005
C616	1-118-389-11 s	CAP, CERAMIC 0.022MF X7R 1005
C617	1-118-389-11 s	CAP, CERAMIC 0.022MF X7R 1005
C618	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C619	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C622	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C623	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C624	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C625	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C700	1-118-050-11 s	CAP, CERAMIC 10MF X5R (3225)
C701	1-118-050-11 s	CAP, CERAMIC 10MF X5R (3225)
C702	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C703	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C704	1-118-050-11 s	CAP, CERAMIC 10MF X5R (3225)
C705	1-118-050-11 s	CAP, CERAMIC 10MF X5R (3225)
C706	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C707	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C708	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C709	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C710	1-118-036-11 s	CAP, CERAMIC 0.1MF X5R (1608)
C711	1-118-036-11 s	CAP, CERAMIC 0.1MF X5R (1608)
C712	1-118-050-11 s	CAP, CERAMIC 10MF X5R (3225)
C713	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C714	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C715	1-118-050-11 s	CAP, CERAMIC 10MF X5R (3225)
C716	1-116-105-11 s	CAP, ELECT 68MF 105
C717	1-116-107-11 s	CAP, ELECT 220MF 105
C719	1-164-866-81 s	CAP, CHIP CERAMIC 47PF CH 1005
C720	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005

RE-326 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C723	1-114-564-11 o	CAP, CERAMIC 4.7MF C 3225
C724	1-116-865-11 s	CAP, CERAMIC 10MF X5R 3216
C726	1-114-564-11 o	CAP, CERAMIC 4.7MF C 3225
C727	1-116-865-11 s	CAP, CERAMIC 10MF X5R 3216
C728	1-107-819-81 s	CAP,CHIP CERAMIC 22000PF B1005
C730	1-118-036-11 s	CAP, CERAMIC 0.1MF X5R (1608)
C731	1-118-036-11 s	CAP, CERAMIC 0.1MF X5R (1608)
C732	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C734	1-116-711-11 s	CAP, CERAMIC 22MF X5R 3216
C735	1-116-710-11 o	CAP, CERAMIC 22MF X7R 3225
C736	1-118-050-11 s	CAP, CERAMIC 10MF X5R (3225)
C737	1-114-564-11 o	CAP, CERAMIC 4.7MF C 3225
C738	1-116-710-11 o	CAP, CERAMIC 22MF X7R 3225
C739	1-116-710-11 o	CAP, CERAMIC 22MF X7R 3225
C740	1-118-036-11 s	CAP, CERAMIC 0.1MF X5R (1608)
C741	1-118-036-11 s	CAP, CERAMIC 0.1MF X5R (1608)
C801	1-118-036-11 s	CAP, CERAMIC 0.1MF X5R (1608)
C802	1-116-865-11 s	CAP, CERAMIC 10MF X5R 3216
C803	1-118-389-11 s	CAP, CERAMIC 0.022MF X7R 1005
C804	1-116-744-11 s	CAP, CERAMIC 0.22MF X5R 1005
C805	1-118-395-11 s	CAP, CERAMIC 4700PF X7R 1005
C806	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C807	1-162-919-91 s	CAP, CERAMIC 22PF CH 1608
C809	1-118-036-11 s	CAP, CERAMIC 0.1MF X5R (1608)
C810	1-118-389-11 s	CAP, CERAMIC 0.022MF X7R 1005
C811	1-116-865-11 s	CAP, CERAMIC 10MF X5R 3216
C812	1-118-037-11 s	CAP, CERAMIC 0.22MF X5R (1608)
C813	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C814	1-116-865-11 s	CAP, CERAMIC 10MF X5R 3216
C815	1-116-865-11 s	CAP, CERAMIC 10MF X5R 3216
C816	1-116-865-11 s	CAP, CERAMIC 10MF X5R 3216
C817	1-116-865-11 s	CAP, CERAMIC 10MF X5R 3216
C818	1-116-865-11 s	CAP, CERAMIC 10MF X5R 3216
C819	1-116-865-11 s	CAP, CERAMIC 10MF X5R 3216
C820	1-118-036-11 s	CAP, CERAMIC 0.1MF X5R (1608)
C821	1-116-115-11 s	CAP, ELECT 150MF 105
C822	1-107-819-81 s	CAP,CHIP CERAMIC 22000PF B1005
C824	1-164-934-81 s	CAP, CHIP CERAMIC 330PF B 1005
C825	1-118-407-11 o	CAP, CERAMIC 470PF X7R 1005
C826	1-116-865-11 s	CAP, CERAMIC 10MF X5R 3216
C828	1-118-395-11 s	CAP, CERAMIC 4700PF X7R 1005
CN100	1-770-470-41 s	PIN, CONNECTOR (PC BOARD) 6P
CN102	1-784-254-21 s	CONNECTOR 10P
CN300	1-784-200-31 s	CONNECTOR, BOARD TO BOARD 140P
CN301	1-817-870-21 s	PIN, CONNECTOR 12P
CN800	1-764-250-41 s	PIN, CONNECTOR (PC BOARD) 4P
D100	8-719-989-04 s	DIODE DAN222-TL
D101	8-719-991-01 s	DIODE DAP222-TL
D102	8-719-989-04 s	DIODE DAN222-TL
D103	8-719-066-92 s	DIODE D1FL20U-TA
D104	8-719-066-92 s	DIODE D1FL20U-TA
D105	8-719-069-59 s	DI UDZSUSTE-178.2B
D106	6-503-573-01 o	DI 1SS400SMGJT2R
D107	6-502-527-01 s	DI UDZSUSTE-172.2B
D108	8-719-083-58 s	DI UDZSUSTE-173.9B
D109	8-719-063-83 s	DIODE CL-196YG-CD-T
D110	6-502-598-01 s	DI SML-D12U8WT86
D111	8-719-063-83 s	DIODE CL-196YG-CD-T
D112	6-503-573-01 o	DI 1SS400SMGJT2R
D113	6-502-598-01 s	DI SML-D12U8WT86
D114	8-719-083-57 s	DI UDZSUSTE-173.6B
D115	8-719-083-58 s	DI UDZSUSTE-173.9B
D116	8-719-083-58 s	DI UDZSUSTE-173.9B
D117	6-503-573-01 o	DI 1SS400SMGJT2R
D500	8-719-069-55 s	DI UDZSUSTE-175.6B

RE-326 BOARD

Ref. No. or Q'ty	Part No.	SP Description
D501	8-719-069-55 s	DI UDZSUSTE-175.6B
D503	8-719-056-48 s	DI 1SS388
D504	8-719-056-48 s	DI 1SS388
D505	8-719-056-48 s	DI 1SS388
D506	8-719-056-48 s	DI 1SS388
D507	8-719-056-48 s	DI 1SS388
D600	8-719-072-43 s	DIODE RB050L-40TE25
D601	8-719-072-43 s	DIODE RB050L-40TE25
D602	6-503-573-01 o	DI 1SS400SMGJT2R
D603	6-503-573-01 o	DI 1SS400SMGJT2R
D700	8-719-069-59 s	DI UDZSUSTE-178.2B
D701	8-719-083-61 s	DI UDZSUSTE-1711B
D702	8-719-072-43 s	DIODE RB050L-40TE25
D703	8-719-072-43 s	DIODE RB050L-40TE25
D704	8-719-072-43 s	DIODE RB050L-40TE25
D705	8-719-072-43 s	DIODE RB050L-40TE25
D706	8-719-083-71 s	DI UDZSUSTE-1730B
D707	8-719-083-67 s	DI UDZSUSTE-1720B
D708	6-503-573-01 o	DI 1SS400SMGJT2R
D709	6-503-573-01 o	DI 1SS400SMGJT2R
D800	6-501-124-01 s	DIODE RSX101VA-30TR
D802	6-501-124-01 s	DIODE RSX101VA-30TR
D803	6-503-573-01 o	DI 1SS400SMGJT2R
ET001	1-780-627-11 s	TERMINAL, LUG
ET002	1-780-627-11 s	TERMINAL, LUG
ET003	1-780-627-11 s	TERMINAL, LUG
ET004	1-780-627-11 s	TERMINAL, LUG
ET005	1-854-133-11 s	TAP, THROUGH-HOLE
ET006	1-780-112-21 s	TERMINAL, CONTACT
F100	⚠ 1-576-566-21 s	FUSE (SMD) (15A/65V)
F101	⚠ 1-576-566-21 s	FUSE (SMD) (15A/65V)
FB200	1-416-976-21 s	FERRITE, EMI (SMD) (3216)
FB201	1-416-976-21 s	FERRITE, EMI (SMD) (3216)
FB202	1-416-976-21 s	FERRITE, EMI (SMD) (3216)
FB203	1-416-976-21 s	FERRITE, EMI (SMD) (3216)
FB204	1-416-976-21 s	FERRITE, EMI (SMD) (3216)
FB205	1-416-976-21 s	FERRITE, EMI (SMD) (3216)
FB206	1-416-976-21 s	FERRITE, EMI (SMD) (3216)
FB207	1-416-976-21 s	FERRITE, EMI (SMD) (3216)
FB208	1-400-580-21 s	FERRITE, EMI (SMD)
FB209	1-416-976-21 s	FERRITE, EMI (SMD) (3216)
FB300	1-416-976-21 s	FERRITE, EMI (SMD) (3216)
FB301	1-416-976-21 s	FERRITE, EMI (SMD) (3216)
FB302	1-416-976-21 s	FERRITE, EMI (SMD) (3216)
FB303	1-416-976-21 s	FERRITE, EMI (SMD) (3216)
FB304	1-416-976-21 s	FERRITE, EMI (SMD) (3216)
FB305	1-416-976-21 s	FERRITE, EMI (SMD) (3216)
FB306	1-416-976-21 s	FERRITE, EMI (SMD) (3216)
FB307	1-416-976-21 s	FERRITE, EMI (SMD) (3216)
FB400	1-416-976-21 s	FERRITE, EMI (SMD) (3216)
FB401	1-416-976-21 s	FERRITE, EMI (SMD) (3216)
FB402	1-416-976-21 s	FERRITE, EMI (SMD) (3216)
FB403	1-416-976-21 s	FERRITE, EMI (SMD) (3216)
FB500	1-416-976-21 s	FERRITE, EMI (SMD) (3216)
FB501	1-416-976-21 s	FERRITE, EMI (SMD) (3216)
FB502	1-416-976-21 s	FERRITE, EMI (SMD) (3216)
FB503	1-416-976-21 s	FERRITE, EMI (SMD) (3216)
FB504	1-416-976-21 s	FERRITE, EMI (SMD) (3216)
FB505	1-416-976-21 s	FERRITE, EMI (SMD) (3216)
FB700	1-400-580-21 s	FERRITE, EMI (SMD)
FB701	1-400-580-21 s	FERRITE, EMI (SMD)
FB702	1-400-580-21 s	FERRITE, EMI (SMD)

RE-326 BOARD

Ref. No. or Q'ty	Part No.	SP Description
FB703	1-400-580-21 s	FERRITE, EMI (SMD)
FB704	1-400-580-21 s	FERRITE, EMI (SMD)
FB705	1-400-580-21 s	FERRITE, EMI (SMD)
FB706	1-400-580-21 s	FERRITE, EMI (SMD)
FB707	1-400-580-21 s	FERRITE, EMI (SMD)
FB800	1-400-580-21 s	FERRITE, EMI (SMD)
FL800	1-400-065-21 s	FILTER, EMI REMOVAL (SMD)
FL801	1-400-065-21 s	FILTER, EMI REMOVAL (SMD)
FL803	1-400-065-21 s	FILTER, EMI REMOVAL (SMD)
IC101	6-718-933-01 s	IC TPS7A1633DGNR
IC102	6-702-879-01 s	IC R3112N281A-TR-FE
IC103	6-711-947-01 s	IC MM1431CURE
IC104	6-702-879-01 s	IC R3112N281A-TR-FE
IC105	6-703-976-01 s	IC R1114Q181D-TR-FE
IC106	6-721-929-01 s	IC 5M160ZE64I5N-RE326V100
IC107	8-759-588-01 s	IC LTC1473CGN-E2
IC108	8-759-273-87 s	IC NJM2901V(Te2)
IC109	6-704-565-01 s	IC R3112N161A-TR-FE
IC200	6-714-809-01 s	IC TPS51220ARSNR
IC201	6-714-809-01 s	IC TPS51220ARSNR
IC202	6-715-164-01 s	IC TPS2553DBVR
IC203	6-715-164-01 s	IC TPS2553DBVR
IC204	6-715-164-01 s	IC TPS2553DBVR
IC300	6-714-809-01 s	IC TPS51220ARSNR
IC301	6-714-809-01 s	IC TPS51220ARSNR
IC400	6-714-809-01 s	IC TPS51220ARSNR
IC500	6-701-652-01 s	IC MAX4374TEUB+TG069
IC501	6-701-652-01 s	IC MAX4374TEUB+TG069
IC600	6-704-567-01 s	IC R3112N451A-TR-FE
IC601	6-704-567-01 s	IC R3112N451A-TR-FE
IC602	6-708-657-01 s	IC XC9201D09AKR
IC603	6-708-657-01 s	IC XC9201D09AKR
IC604	8-759-337-41 s	IC NJM2902V-TE2
IC605	8-759-337-41 s	IC NJM2902V-TE2
IC700	6-711-266-01 s	IC MP1593DN-LF
IC701	6-711-266-01 s	IC MP1593DN-LF
IC702	6-705-480-01 s	IC LT3467ES6#TR
IC703	6-705-480-01 s	IC LT3467ES6#TR
IC800	8-759-488-34 s	IC TLV2221CDBV
IC801	8-759-638-44 s	IC LTC1625CGN-E2
IC802	6-701-652-01 s	IC MAX4374TEUB+TG069
L200	1-482-238-11 s	COIL, CHOKE 4.7UH (6060)
L201	1-482-238-11 s	COIL, CHOKE 4.7UH (6060)
L202	1-482-238-11 s	COIL, CHOKE 4.7UH (6060)
L203	1-482-238-11 s	COIL, CHOKE 4.7UH (6060)
L204	1-457-852-11 s	COIL, CHOKE 1.2UH
L304	1-457-735-11 s	CHOKE COIL 10UH
L305	1-457-735-11 s	CHOKE COIL 10UH
L306	1-457-735-11 s	CHOKE COIL 10UH
L307	1-457-497-11 s	COIL, CHOKE (SMD)
L402	1-457-735-11 s	CHOKE COIL 10UH
L404	1-457-714-11 s	CHOKE COIL 4.7UH
L600	1-460-377-11 s	COIL, CHOKE 33UH
L601	1-460-377-11 s	COIL, CHOKE 33UH
L700	1-457-455-11 s	CHOKE COIL 10UH
L701	1-457-455-11 s	CHOKE COIL 10UH
L704	1-457-735-11 s	CHOKE COIL 10UH
L705	1-457-735-11 s	CHOKE COIL 10UH
L800	1-469-549-21 s	INDUCTOR, CHIP 1.0UH (LB2016)
L801	1-457-868-11 s	COIL, CHOKE
L802	1-469-843-21 s	INDUCTOR, (SMD) 3.3UH
Q100	6-552-642-01 s	TR SI2304DDS-T1-GE3
Q101	6-552-642-01 s	TR SI2304DDS-T1-GE3
Q102	8-729-928-28 s	TRANSISTOR DTA144EE-TL

RE-326 BOARD

Ref. No. or Q'ty	Part No.	SP Description
Q103	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q104	6-552-985-01 s	TR TPCA8120,L1SOYQ(CJ
Q105	6-552-468-01 s	TR FDMC6679AZ
Q106	6-550-980-01 s	TR RN1904
Q108	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q109	6-552-494-01 s	TR SI2307CDS-T1-GE3
Q110	6-550-718-01 s	TRANSISTOR RSR025N03TL
Q111	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q112	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q117	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q120	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q122	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q123	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q124	8-729-928-28 s	TRANSISTOR DTA144EE-TL
Q125	6-550-980-01 s	TR RN1904
Q200	6-550-980-01 s	TR RN1904
Q201	6-550-980-01 s	TR RN1904
Q202	6-550-980-01 s	TR RN1904
Q203	6-552-473-21 s	TR FDMC7692
Q204	6-552-473-21 s	TR FDMC7692
Q205	6-552-473-21 s	TR FDMC7692
Q206	6-552-473-21 s	TR FDMC7692
Q207	6-552-473-21 s	TR FDMC7692
Q208	6-552-473-21 s	TR FDMC7692
Q209	6-552-473-21 s	TR FDMC7692
Q210	6-552-473-21 s	TR FDMC7692
Q211	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q300	6-550-980-01 s	TR RN1904
Q301	6-550-980-01 s	TR RN1904
Q302	6-550-980-01 s	TR RN1904
Q303	6-552-473-21 s	TR FDMC7692
Q304	6-552-473-21 s	TR FDMC7692
Q305	6-552-473-21 s	TR FDMC7692
Q306	6-552-473-21 s	TR FDMC7692
Q307	6-552-473-21 s	TR FDMC7692
Q308	6-552-473-21 s	TR FDMC7692
Q309	6-552-473-21 s	TR FDMC7692
Q310	6-552-473-21 s	TR FDMC7692
Q400	6-550-980-01 s	TR RN1904
Q401	6-550-980-01 s	TR RN1904
Q402	6-552-473-21 s	TR FDMC7692
Q403	6-552-473-21 s	TR FDMC7692
Q404	6-552-473-21 s	TR FDMC7692
Q405	6-552-473-21 s	TR FDMC7692
Q500	6-551-041-01 s	TR RN4904
Q501	6-551-041-01 s	TR RN4904
Q503	8-729-927-99 s	TRANSISTOR 2SC4617TL-QR
Q504	8-729-927-99 s	TRANSISTOR 2SC4617TL-QR
Q506	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q508	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q509	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q514	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q516	8-729-928-19 s	TRANSISTOR 2SA1774TL-QR
Q517	8-729-928-19 s	TRANSISTOR 2SA1774TL-QR
Q521	6-552-860-01 s	TR ATP302-TL-H
Q523	6-550-980-01 s	TR RN1904
Q524	6-550-980-01 s	TR RN1904
Q525	6-552-985-01 s	TR TPCA8120,L1SOYQ(CJ
Q526	6-550-980-01 s	TR RN1904
Q527	6-552-860-01 s	TR ATP302-TL-H
Q528	6-552-985-01 s	TR TPCA8120,L1SOYQ(CJ
Q529	6-552-985-01 s	TR TPCA8120,L1SOYQ(CJ
Q600	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q601	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q602	6-552-468-01 s	TR FDMC6679AZ

RE-326 BOARD

Ref. No. or Q'ty	Part No.	SP Description
Q603	6-552-468-01 s	TR FDMC6679AZ
Q604	8-729-927-99 s	TRANSISTOR 2SC4617TL-QR
Q605	8-729-928-19 s	TRANSISTOR 2SA1774TL-QR
Q606	8-729-927-99 s	TRANSISTOR 2SC4617TL-QR
Q607	8-729-928-19 s	TRANSISTOR 2SA1774TL-QR
Q608	8-729-927-99 s	TRANSISTOR 2SC4617TL-QR
Q609	8-729-927-99 s	TRANSISTOR 2SC4617TL-QR
Q700	8-729-928-91 s	TRANSISTOR DTC114EE-TL
Q701	8-729-928-91 s	TRANSISTOR DTC114EE-TL
Q702	8-729-928-91 s	TRANSISTOR DTC114EE-TL
Q703	8-729-928-91 s	TRANSISTOR DTC114EE-TL
Q704	8-729-927-99 s	TRANSISTOR 2SC4617TL-QR
Q705	8-729-927-99 s	TRANSISTOR 2SC4617TL-QR
Q708	6-551-041-01 s	TR RN4904
Q709	6-551-041-01 s	TR RN4904
Q710	6-550-980-01 s	TR RN1904
Q800	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q802	8-729-927-99 s	TRANSISTOR 2SC4617TL-QR
Q804	8-729-927-99 s	TRANSISTOR 2SC4617TL-QR
Q805	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q806	6-551-736-01 s	TRANSISTOR FDS6690AS
Q807	6-551-736-01 s	TRANSISTOR FDS6690AS
R100	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R101	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R107	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R108	1-250-559-11 o	RES,METAL FILM CHIP 470K(1005)
R109	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R110	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R111	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R112	1-250-551-11 s	RES,METAL FILM CHIP 220K(1005)
R118	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R119	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R120	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R121	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R122	1-250-555-11 s	RES,METAL FILM CHIP 330K(1005)
R123	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R124	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R125	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R126	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R129	1-250-567-11 s	RES, METAL FILM CHIP 1M (1005)
R130	1-250-559-11 o	RES,METAL FILM CHIP 470K(1005)
R131	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R132	1-250-555-11 s	RES,METAL FILM CHIP 330K(1005)
R133	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R134	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R135	1-250-559-11 o	RES,METAL FILM CHIP 470K(1005)
R136	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R137	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R138	1-250-567-11 s	RES, METAL FILM CHIP 1M (1005)
R139	1-250-559-11 o	RES,METAL FILM CHIP 470K(1005)
R140	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R141	1-250-567-11 s	RES, METAL FILM CHIP 1M (1005)
R142	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R143	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R144	1-250-555-11 s	RES,METAL FILM CHIP 330K(1005)
R145	1-250-547-11 s	RES,METAL FILM CHIP 150K(1005)
R146	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R147	1-216-797-91 s	RES, CHIP 10 (1608)
R148	1-250-567-11 s	RES, METAL FILM CHIP 1M (1005)
R149	1-250-559-11 o	RES,METAL FILM CHIP 470K(1005)
R150	1-250-483-11 s	RES, METAL FILM CHIP 330(1005)
R151	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R152	1-250-555-11 s	RES,METAL FILM CHIP 330K(1005)
R153	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R154	1-250-539-11 o	RES, METAL FILM CHIP 68K(1005)

RE-326 BOARD

Ref. No. or Q'ty	Part No.	SP Description
R155	1-250-539-11 o	RES, METAL FILM CHIP 68K(1005)
R156	1-250-567-11 s	RES, METAL FILM CHIP 1M (1005)
R157	1-250-559-11 o	RES,METAL FILM CHIP 470K(1005)
R158	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R159	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R160	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R161	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R162	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R163	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R164	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R167	1-250-487-11 s	RES, METAL FILM CHIP 470(1005)
R168	1-219-611-21 s	RES, CHIP (SQUARE TYPE) 0.047
R169	1-219-611-21 s	RES, CHIP (SQUARE TYPE) 0.047
R170	1-219-611-21 s	RES, CHIP (SQUARE TYPE) 0.047
R171	1-216-295-91 s	CONDUCTOR, CHIP (2012)
R174	1-216-295-91 s	CONDUCTOR, CHIP (2012)
R177	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R178	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R181	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R182	1-250-515-11 s	RES,METAL FILM CHIP 6.8K(1005)
R183	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R185	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R187	1-216-295-91 s	CONDUCTOR, CHIP (2012)
R200	1-250-531-11 s	RES, METAL FILM CHIP 33K(1005)
R201	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R202	1-250-559-11 o	RES,METAL FILM CHIP 470K(1005)
R203	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R204	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R205	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R207	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R211	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R212	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R215	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R216	1-250-507-11 o	RES,METAL FILM CHIP 3.3K(1005)
R217	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R218	1-250-507-11 o	RES,METAL FILM CHIP 3.3K(1005)
R219	1-250-507-11 o	RES,METAL FILM CHIP 3.3K(1005)
R220	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R221	1-250-515-11 s	RES,METAL FILM CHIP 6.8K(1005)
R222	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R223	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R224	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R225	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R226	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R227	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R228	1-250-515-11 s	RES,METAL FILM CHIP 6.8K(1005)
R229	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R230	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R231	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R232	1-250-539-11 o	RES, METAL FILM CHIP 68K(1005)
R233	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R234	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R235	1-250-539-11 o	RES, METAL FILM CHIP 68K(1005)
R236	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R237	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R238	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R239	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R240	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R241	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R242	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R243	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R244	1-250-547-11 s	RES,METAL FILM CHIP 150K(1005)
R245	1-250-547-11 s	RES,METAL FILM CHIP 150K(1005)
R246	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R247	1-218-990-81 s	CONDUCTOR, CHIP (1005)

RE-326 BOARD

Ref. No. or Q'ty	Part No.	SP Description
R248	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R249	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R250	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R251	1-242-967-81 s	RES, CHIP 1.0 (1005)
R252	1-242-967-81 s	RES, CHIP 1.0 (1005)
R256	1-242-967-81 s	RES, CHIP 1.0 (1005)
R257	1-242-967-81 s	RES, CHIP 1.0 (1005)
R265	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R266	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R269	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R270	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R271	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R272	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R274	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R275	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R276	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R277	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R278	1-248-340-11 s	RES, METAL FILM 0.22 (2012)
R281	1-216-295-91 s	CONDUCTOR, CHIP (2012)
R300	1-250-531-11 s	RES, METAL FILM CHIP 33K(1005)
R301	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R302	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R303	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R305	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R309	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R310	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R313	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R314	1-250-507-11 o	RES,METAL FILM CHIP 3.3K(1005)
R315	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R316	1-250-507-11 o	RES,METAL FILM CHIP 3.3K(1005)
R317	1-250-507-11 o	RES,METAL FILM CHIP 3.3K(1005)
R318	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R319	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R321	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R322	1-250-507-11 o	RES,METAL FILM CHIP 3.3K(1005)
R323	1-250-507-11 o	RES,METAL FILM CHIP 3.3K(1005)
R324	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R325	1-250-531-11 s	RES, METAL FILM CHIP 33K(1005)
R326	1-250-515-11 s	RES,METAL FILM CHIP 6.8K(1005)
R327	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R328	1-250-539-11 o	RES, METAL FILM CHIP 68K(1005)
R329	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R331	1-250-547-11 s	RES,METAL FILM CHIP 150K(1005)
R332	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R333	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R334	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R335	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R336	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R337	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R338	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R339	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R340	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R341	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R342	1-250-547-11 s	RES,METAL FILM CHIP 150K(1005)
R343	1-250-547-11 s	RES,METAL FILM CHIP 150K(1005)
R344	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R345	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R346	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R347	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R348	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R349	1-242-967-81 s	RES, CHIP 1.0 (1005)
R350	1-242-967-81 s	RES, CHIP 1.0 (1005)
R353	1-242-967-81 s	RES, CHIP 1.0 (1005)
R354	1-242-967-81 s	RES, CHIP 1.0 (1005)
R361	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)

RE-326 BOARD

Ref. No. or Q'ty	Part No.	SP Description
R362	1-250-487-11 s	RES, METAL FILM CHIP 470(1005)
R400	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R401	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R402	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R404	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R407	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R408	1-250-507-11 o	RES,METAL FILM CHIP 3.3K(1005)
R409	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R410	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R411	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R412	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R413	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R414	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R415	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R416	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R418	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R419	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R422	1-250-547-11 s	RES,METAL FILM CHIP 150K(1005)
R423	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R424	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R425	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R426	1-242-967-81 s	RES, CHIP 1.0 (1005)
R427	1-242-967-81 s	RES, CHIP 1.0 (1005)
R432	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R434	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R500	1-250-640-11 s	RES, METAL FILM CHIP 10K(1608)
R501	1-250-640-11 s	RES, METAL FILM CHIP 10K(1608)
R504	1-250-640-11 s	RES, METAL FILM CHIP 10K(1608)
R505	1-250-640-11 s	RES, METAL FILM CHIP 10K(1608)
R508	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R509	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R513	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R515	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R518	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R519	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R523	1-257-320-11 s	RES, METAL PLATE 0.05
R524	1-257-320-11 s	RES, METAL PLATE 0.05
R525	1-250-559-11 o	RES,METAL FILM CHIP 470K(1005)
R526	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R530	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R531	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R532	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R533	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R539	1-250-487-11 s	RES, METAL FILM CHIP 470(1005)
R540	1-250-487-11 s	RES, METAL FILM CHIP 470(1005)
R541	1-250-559-11 o	RES,METAL FILM CHIP 470K(1005)
R542	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R547	1-250-555-11 s	RES,METAL FILM CHIP 330K(1005)
R548	1-250-555-11 s	RES,METAL FILM CHIP 330K(1005)
R549	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R550	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R551	1-250-555-11 s	RES,METAL FILM CHIP 330K(1005)
R552	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R553	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R554	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R555	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R558	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R560	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R561	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R568	1-216-295-91 s	CONDUCTOR, CHIP (2012)
R569	1-250-555-11 s	RES,METAL FILM CHIP 330K(1005)
R570	1-250-555-11 s	RES,METAL FILM CHIP 330K(1005)
R600	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R601	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R602	1-250-563-11 s	RES,METAL FILM CHIP 680K(1005)

RE-326 BOARD

Ref. No. or Q'ty	Part No.	SP Description
R603	1-250-563-11 s	RES,METAL FILM CHIP 680K(1005)
R604	1-250-515-11 s	RES,METAL FILM CHIP 6.8K(1005)
R605	1-250-515-11 s	RES,METAL FILM CHIP 6.8K(1005)
R606	1-211-899-91 s	RES,SQUARE TYPE CHIP 0.22 3225
R607	1-211-899-91 s	RES,SQUARE TYPE CHIP 0.22 3225
R608	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R609	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R610	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R611	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R612	1-250-531-11 s	RES, METAL FILM CHIP 33K(1005)
R613	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R614	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R615	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R616	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R617	1-250-531-11 s	RES, METAL FILM CHIP 33K(1005)
R618	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R619	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R620	1-250-507-11 o	RES,METAL FILM CHIP 3.3K(1005)
R621	1-250-507-11 o	RES,METAL FILM CHIP 3.3K(1005)
R622	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R623	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R624	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R625	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R626	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R627	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R628	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R629	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R630	1-250-551-11 s	RES,METAL FILM CHIP 220K(1005)
R631	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R632	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R633	1-250-551-11 s	RES,METAL FILM CHIP 220K(1005)
R634	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R635	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R636	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R637	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R638	1-250-523-11 o	RES, METAL FILM CHIP 15K(1005)
R639	1-250-523-11 o	RES, METAL FILM CHIP 15K(1005)
R640	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R641	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R642	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R643	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R644	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R645	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R646	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R647	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R648	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R649	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R700	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R701	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R702	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R703	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R704	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R705	1-250-551-11 s	RES,METAL FILM CHIP 220K(1005)
R706	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R707	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R708	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R709	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R710	1-250-551-11 s	RES,METAL FILM CHIP 220K(1005)
R711	1-250-523-11 o	RES, METAL FILM CHIP 15K(1005)
R712	1-250-507-11 o	RES,METAL FILM CHIP 3.3K(1005)
R713	1-250-483-11 s	RES, METAL FILM CHIP 330(1005)
R714	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R715	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R718	1-250-531-11 s	RES, METAL FILM CHIP 33K(1005)
R719	1-218-990-81 s	CONDUCTOR, CHIP (1005)

RE-326 BOARD

Ref. No. or Q'ty	Part No.	SP Description
R720	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R721	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R722	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R723	1-250-531-11 s	RES, METAL FILM CHIP 33K(1005)
R724	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R725	1-250-547-11 s	RES,METAL FILM CHIP 150K(1005)
R726	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R727	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R728	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R729	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R730	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R734	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R736	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R737	1-250-539-11 o	RES, METAL FILM CHIP 68K(1005)
R738	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R739	1-250-539-11 o	RES, METAL FILM CHIP 68K(1005)
R740	1-250-531-11 s	RES, METAL FILM CHIP 33K(1005)
R741	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R742	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R743	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R744	1-250-531-11 s	RES, METAL FILM CHIP 33K(1005)
R745	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R800	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R801	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R803	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R804	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R805	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R806	1-250-559-11 o	RES,METAL FILM CHIP 470K(1005)
R807	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R809	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R810	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R812	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R814	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R815	1-250-576-11 o	RES, METAL FILM CHIP 22 (1608)
R816	1-250-576-11 o	RES, METAL FILM CHIP 22 (1608)
R817	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R818	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R820	1-250-567-11 s	RES, METAL FILM CHIP 1M (1005)
R821	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R822	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R823	1-219-684-21 s	RES, CHIP (SQUARE TYPE) 0.01
R824	1-219-684-21 s	RES, CHIP (SQUARE TYPE) 0.01
R825	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R826	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R827	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R828	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R829	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R830	1-218-990-81 s	CONDUCTOR, CHIP (1005)
RB100	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB101	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB102	1-234-375-21 s	RES, NETWORK 1K (1005X4)
RB103	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB104	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB105	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB106	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB107	1-234-378-21 s	RES, NETWORK 10K (1005X4)
S107	1-771-795-21 s	SWITCH, SLIDE
TH001	△ 1-771-845-21 s	THERMISTOR, POSITIVE
TH200	△ 1-802-063-21 s	THERMISTOR, POSITIVE
TH500	△ 1-802-108-11 s	THERMISTOR, POSITIVE
TH501	△ 1-802-108-11 s	THERMISTOR, POSITIVE
TH502	△ 1-802-063-21 s	THERMISTOR, POSITIVE

RE-326 BOARD

Ref. No. or Q'ty	Part No.	SP Description
TH600	△ 1-771-845-21 s	THERMISTOR, POSITIVE
TH601	△ 1-771-845-21 s	THERMISTOR, POSITIVE
TP001	1-535-877-22 s	CHIP, CHECKER
TP002	1-535-877-22 s	CHIP, CHECKER
TP003	1-535-877-22 s	CHIP, CHECKER
X100	1-813-329-11 s	OSCILLATOR, CRYSTAL

RM-246 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-2058-421-A s	MOUNTED CIRCUIT BOARD, RM-246
CN1	1-820-029-11 s	PIN, CONNECTOR (1.5MM) (SMD) 8P
CN2	1-766-696-11 o	CONNECTOR, ROUND TYPE 8P
FB1	1-400-832-21 s	SMD EMI FERRITE
FB2	1-400-832-21 s	SMD EMI FERRITE
FB3	1-400-832-21 s	SMD EMI FERRITE
FB4	1-400-832-21 s	SMD EMI FERRITE
FB8	1-414-445-21 s	FERRITE, EMI (SMD) (1608)
FL1	1-400-065-21 s	FILTER, EMI REMOVAL (SMD)
FL2	1-400-065-21 s	FILTER, EMI REMOVAL (SMD)
R1	1-218-990-81 s	CONDUCTOR, CHIP (1005)

RX-136 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-2054-861-A s	MOUNTED CIRCUIT BOARD, RX-136
C1	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C2	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C3	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C4	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C5	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C6	1-164-882-81 s	CAP,CHIP CERAMIC 220PF CH 1005
C7	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C8	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C9	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C10	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C11	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C12	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C13	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C14	1-118-040-11 s	CAP, CERAMIC 2.2MF X5R (1608)
C15	1-118-040-11 s	CAP, CERAMIC 2.2MF X5R (1608)
C16	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C17	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C18	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C19	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
CN1	1-817-854-11 s	CONNECTOR, D SUB 15P
CN2	1-784-625-31 s	CONNECTOR, FFC/FPC (21F) AN 30P
D1	8-719-991-01 s	DIODE DAP222-TL
IC1	8-759-698-08 s	IC SN74CBTLV1G125DCKR
IC2	8-759-698-08 s	IC SN74CBTLV1G125DCKR
IC3	8-759-698-08 s	IC SN74CBTLV1G125DCKR
IC4	6-706-484-01 s	IC TC7SH04FU
IC5	8-759-698-08 s	IC SN74CBTLV1G125DCKR

RX-136 BOARD

Ref. No. or Q'ty	Part No.	SP Description
IC6	6-706-487-01 s	IC TC7SH08FU
IC7	6-706-484-01 s	IC TC7SH04FU
IC8	6-706-484-01 s	IC TC7SH04FU
IC9	8-759-422-21 s	IC NJM4580V (TE2)
IC10	8-759-422-21 s	IC NJM4580V (TE2)
L1	1-469-549-21 s	INDUCTOR, CHIP 1.0UH (LB2016)
L2	1-469-549-21 s	INDUCTOR, CHIP 1.0UH (LB2016)
L3	1-469-555-21 s	INDUCTOR, CHIP 10UH (LB2016)
L4	1-469-555-21 s	INDUCTOR, CHIP 10UH (LB2016)
Q1	6-551-526-01 o	TRANSISTOR RJU003N03T1
Q2	6-551-526-01 o	TRANSISTOR RJU003N03T1
Q3	8-729-929-09 s	TRANSISTOR DTC123JE-TL
R2	1-218-977-81 s	RES, CHIP 100K (1005)
R3	1-218-977-81 s	RES, CHIP 100K (1005)
R4	1-218-977-81 s	RES, CHIP 100K (1005)
R5	1-218-977-81 s	RES, CHIP 100K (1005)
R6	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R7	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R8	1-218-947-11 s	RES, CHIP 330 (1005)
R9	1-218-947-11 s	RES, CHIP 330 (1005)
R10	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R11	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R12	1-218-977-81 s	RES, CHIP 100K (1005)
R13	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R14	1-218-973-81 s	RES, CHIP 47K (1005)
R15	1-218-973-81 s	RES, CHIP 47K (1005)
R16	1-218-977-81 s	RES, CHIP 100K (1005)
R19	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R20	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R21	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R22	1-250-485-11 s	RES, METAL FILM CHIP 390(1005)
R23	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R24	1-250-485-11 s	RES, METAL FILM CHIP 390(1005)
R25	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R26	1-250-499-11 o	RES,METAL FILM CHIP 1.5K(1005)
R27	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R28	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R29	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R30	1-250-499-11 o	RES,METAL FILM CHIP 1.5K(1005)
R31	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R32	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R35	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R36	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R37	1-250-491-11 o	RES, METAL FILM CHIP 680(1005)
R38	1-250-491-11 o	RES, METAL FILM CHIP 680(1005)
RB1	1-234-370-21 s	RES, NETWORK 22 (1005X4)

SD-58 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-2057-507-A s	MOUNTED CIRCUIT BOARD, SD-58
C001	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C002	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C003	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
CN001	1-820-806-21 o	CONNECTOR, COAXIAL (RECEPTACLE)
CN002	1-822-411-21 s	CONNECTOR, CARD
CN003	1-784-650-21 s	CONNECTOR 2P
D001	6-502-195-01 s	DI SML-D12D8WT86SQ
FB001	1-400-725-21 s	FERRITE, EMI (SMD) (1005)

SD-58 BOARD

Ref. No. or Q'ty	Part No.	SP Description
FB002	1-400-725-21 s	FERRITE, EMI (SMD) (1005)
FB003	1-400-725-21 s	FERRITE, EMI (SMD) (1005)
FB004	1-400-725-21 s	FERRITE, EMI (SMD) (1005)
FB005	1-400-725-21 s	FERRITE, EMI (SMD) (1005)
FB006	1-400-725-21 s	FERRITE, EMI (SMD) (1005)
FB007	1-400-725-21 s	FERRITE, EMI (SMD) (1005)
FB008	1-400-725-21 s	FERRITE, EMI (SMD) (1005)
IC001	6-715-164-01 s	IC TPS2553DBVR
Q001	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q002	8-729-929-09 s	TRANSISTOR DTC123JE-TL
R001	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R002	1-218-973-81 s	RES, CHIP 47K (1005)
R003	1-218-933-81 s	RES, CHIP 22 (1005)
R004	1-218-933-81 s	RES, CHIP 22 (1005)
R005	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R006	1-218-933-81 s	RES, CHIP 22 (1005)
R007	1-218-933-81 s	RES, CHIP 22 (1005)
R008	1-218-933-81 s	RES, CHIP 22 (1005)
R009	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R010	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R011	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R012	1-250-487-11 s	RES, METAL FILM CHIP 470(1005)

SE-1155 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-2057-590-A s	MOUNTED CIRCUIT BOARD, SE-1155
C1	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
CN1	1-573-806-21 s	PIN, CONNECTOR (1.5MM) (SMD) 6P
PH1	6-600-300-01 s	IC NJL5901R (TE1)
PH2	6-600-300-01 s	IC NJL5901R (TE1)
Q1	8-729-929-27 s	TRANSISTOR DTC114TE-TL
Q2	8-729-929-27 s	TRANSISTOR DTC114TE-TL
R1	1-250-487-11 s	RES, METAL FILM CHIP 470(1005)
R2	1-250-487-11 s	RES, METAL FILM CHIP 470(1005)
R3	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R4	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)

SW-1632 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-2057-510-A s	MOUNTED CIRCUIT BOARD, SW-1632
CN101	1-785-946-21 s	CONNECTOR 3P
S101	1-571-422-11 s	SWITCH, TOGGLE
S102	1-571-422-11 s	SWITCH, TOGGLE

SW-1650 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-2054-873-A s	MOUNTED CIRCUIT BOARD, SW-1650

SW-1650 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	3-855-938-01 s	SCREW
C1	1-118-036-11 s	CAP, CERAMIC 0.1MF X5R (1608)
C2	1-118-036-11 s	CAP, CERAMIC 0.1MF X5R (1608)
C3	1-118-036-11 s	CAP, CERAMIC 0.1MF X5R (1608)
C4	1-118-036-11 s	CAP, CERAMIC 0.1MF X5R (1608)
CN1	1-764-007-21 o	PIN, CONNECTOR (SMD) 12P
R1	1-216-864-91 s	CONDUCTOR, CHIP (1608)
R2	1-216-864-91 s	CONDUCTOR, CHIP (1608)
S1	1-798-299-21 s	SWITCH, TOGGLE
S2	1-762-000-21 s	SWITCH, TOGGLE
S3	1-762-000-21 s	SWITCH, TOGGLE
S4	1-762-000-21 s	SWITCH, TOGGLE
S5	1-798-295-21 s	SWITCH, TOGGLE
S6	1-762-019-21 s	SWITCH, TOGGLE

SW-1651 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-2054-863-A s	MOUNTED CIRCUIT BOARD, SW-1651
C1	1-114-831-91 s	CAP, CHIP CERAMIC 1MF X7R (3216)
C2	1-118-036-11 s	CAP, CERAMIC 0.1MF X5R (1608)
C3	1-118-036-11 s	CAP, CERAMIC 0.1MF X5R (1608)
C4	1-118-036-11 s	CAP, CERAMIC 0.1MF X5R (1608)
C5	1-118-036-11 s	CAP, CERAMIC 0.1MF X5R (1608)
C6	1-118-036-11 s	CAP, CERAMIC 0.1MF X5R (1608)
C7	1-118-036-11 s	CAP, CERAMIC 0.1MF X5R (1608)
C8	1-118-036-11 s	CAP, CERAMIC 0.1MF X5R (1608)
CN1	1-766-376-21 s	PIN, CONNECTOR (1.5MM) (SMD) 9P
D1	8-719-989-01 s	DIODE DA221-TL
R1	1-216-821-91 s	RES, CHIP 1.0K (1608)
R2	1-216-821-91 s	RES, CHIP 1.0K (1608)
R3	1-216-821-91 s	RES, CHIP 1.0K (1608)
R4	1-216-821-91 s	RES, CHIP 1.0K (1608)
R5	1-216-821-91 s	RES, CHIP 1.0K (1608)
R6	1-216-809-91 s	RES, CHIP 100 (1608)
RV1	1-223-686-11 s	RES, VAR, CARBON 5K/5K
S1	1-570-995-11 s	SWITCH, KEY BOARD
S2	1-762-531-21 s	SWITCH, TOGGLE
S3	1-762-124-21 s	SWITCH, TOGGLE

SW-1652 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-2054-864-A s	MOUNTED CIRCUIT BOARD, SW-1652
C1	1-118-036-11 s	CAP, CERAMIC 0.1MF X5R (1608)
C2	1-118-036-11 s	CAP, CERAMIC 0.1MF X5R (1608)
CN1	1-580-056-21 s	PIN, CONNECTOR (SMD) 3P
R1	1-218-953-81 s	RES, CHIP 1.0K (1005)
R2	1-218-953-81 s	RES, CHIP 1.0K (1005)
S1	1-771-348-11 s	SWITCH, TACTILE
S2	1-771-348-11 s	SWITCH, TACTILE

SW-1653 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-2054-865-A s	MOUNTED CIRCUIT BOARD, SW-1653
CN1	1-580-055-21 o	PIN, CONNECTOR (SMD) 2P
S2	1-571-642-21 s	SWITCH, TOGGLE

TG-287 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C001	1-116-713-11 s	CAP, CERAMIC 22MF X5R 2012
C002	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C003	1-116-713-11 s	CAP, CERAMIC 22MF X5R 2012
C004	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C005	1-114-549-11 s	CAP, NIOBIUM ELECT 47UF
C006	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C007	1-114-548-11 s	CAP, NIOBIUM ELECT 22UF
C008	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C009	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C010	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C011	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C012	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C013	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C014	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C015	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C016	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C017	1-118-046-11 s	CAP, CERAMIC 4.7MF X5R (2012)
C018	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C019	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C020	1-118-046-11 s	CAP, CERAMIC 4.7MF X5R (2012)
C021	1-112-915-11 s	CAP, NIOBIUM ELECT 22MF 105
C022	1-112-915-11 s	CAP, NIOBIUM ELECT 22MF 105
C023	1-116-117-11 s	CAP, ELECT 22MF 105
C024	1-112-915-11 s	CAP, NIOBIUM ELECT 22MF 105
C025	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C026	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C027	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C028	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C029	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C030	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C031	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C032	1-116-865-11 s	CAP, CERAMIC 10MF X5R 3216
C033	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C034	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C035	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C036	1-116-115-11 s	CAP, ELECT 150MF 105
C037	1-114-548-11 s	CAP, NIOBIUM ELECT 22UF
C038	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C039	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C040	1-114-548-11 s	CAP, NIOBIUM ELECT 22UF
C041	1-116-346-11 s	CAP, ELECT 47MF 105
C042	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C043	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C044	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C045	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C046	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C047	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C049	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C050	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C051	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C054	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C055	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C056	1-114-548-11 s	CAP, NIOBIUM ELECT 22UF

TG-287 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C057	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C058	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C060	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C062	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C063	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C064	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C066	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C067	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C069	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C071	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C072	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C073	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C101	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C102	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C103	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C104	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C105	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C106	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C107	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C108	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C109	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C110	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C111	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C112	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C113	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C114	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C115	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C116	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C117	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C118	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C119	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C120	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C121	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C122	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C123	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C124	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C125	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C126	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C127	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C201	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C202	1-118-036-11 s	CAP, CERAMIC 0.1MF X5R (1608)
C203	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C204	1-116-717-11 s	CAP, CERAMIC 10MF X5R 2012
C205	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C206	1-118-036-11 s	CAP, CERAMIC 0.1MF X5R (1608)
C207	1-118-036-11 s	CAP, CERAMIC 0.1MF X5R (1608)
C209	1-118-036-11 s	CAP, CERAMIC 0.1MF X5R (1608)
C211	1-118-036-11 s	CAP, CERAMIC 0.1MF X5R (1608)
C212	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C213	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C214	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C215	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C216	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C217	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C218	1-116-865-11 s	CAP, CERAMIC 10MF X5R 3216
C219	1-116-865-11 s	CAP, CERAMIC 10MF X5R 3216
C220	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C221	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C222	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C223	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C224	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C225	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C226	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C227	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C228	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)

TG-287 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C229	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C230	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C231	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C232	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C233	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C234	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C235	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C236	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C237	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C238	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C239	1-116-717-11 s	CAP, CERAMIC 10MF X5R 2012
C240	1-118-036-11 s	CAP, CERAMIC 0.1MF X5R (1608)
C241	1-118-036-11 s	CAP, CERAMIC 0.1MF X5R (1608)
C242	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C243	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C244	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C245	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C246	1-118-035-11 o	CAP, CERAMIC 0.1MF X5R (1005)
C247	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
CN002	1-817-194-21 s	PIN, CONNECTOR (SMD) 13P
CN005	1-770-627-21 s	PIN, CONNECTOR 10P
D001	8-719-083-60 s	DI UDZSUSTE-174.7B
D002	8-719-083-60 s	DI UDZSUSTE-174.7B
D003	8-719-083-60 s	DI UDZSUSTE-174.7B
D004	8-719-083-60 s	DI UDZSUSTE-174.7B
D005	8-719-083-60 s	DI UDZSUSTE-174.7B
D201	6-503-363-01 s	DI DB2S31400K8
D202	8-719-989-04 s	DIODE DAN222-TL
D203	8-719-989-04 s	DIODE DAN222-TL
D204	8-719-989-04 s	DIODE DAN222-TL
D205	8-719-989-04 s	DIODE DAN222-TL
D206	8-719-989-04 s	DIODE DAN222-TL
D207	8-719-989-04 s	DIODE DAN222-TL
D208	8-719-989-04 s	DIODE DAN222-TL
D209	8-719-989-04 s	DIODE DAN222-TL
D210	8-719-989-04 s	DIODE DAN222-TL
D211	8-719-989-04 s	DIODE DAN222-TL
D212	8-719-989-04 s	DIODE DAN222-TL
D213	8-719-989-04 s	DIODE DAN222-TL
D214	8-719-989-04 s	DIODE DAN222-TL
FB001	1-469-122-21 s	FERRITE, EMI (SMD) (1608)
FB002	1-469-122-21 s	FERRITE, EMI (SMD) (1608)
FB003	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB004	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB005	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB007	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB008	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB015	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
IC001	6-711-852-01 s	IC LTC1844ES5-BYP
IC002	6-710-210-01 s	IC TPS73101DBVRG4
IC003	6-704-976-01 s	IC ADR381ARTZ-REEL7
IC004	6-711-375-01 s	IC LT1964ES5-BYP#TR
IC005	6-711-375-01 s	IC LT1964ES5-BYP#TR
IC006	6-711-852-01 s	IC LTC1844ES5-BYP
IC007	6-709-646-01 s	IC TLC2933AIPWR
IC008	6-721-507-01 s	IC CAT24M01XI-T2
IC009	8-759-327-01 s	IC NJM062V (TE2)
IC010	8-759-327-01 s	IC NJM062V (TE2)
IC011	8-759-327-01 s	IC NJM062V (TE2)
IC012	8-759-327-01 s	IC NJM062V (TE2)
IC013	6-704-099-01 s	IC TC7WZ08FK
IC018	6-704-976-01 s	IC ADR381ARTZ-REEL7
IC019	6-711-488-01 s	IC TC74VCX157FK (EL)

TG-287 BOARD

Ref. No. or Q'ty	Part No.	SP Description
IC020	6-704-099-01 s	IC TC7WZ08FK
IC022	6-711-488-01 s	IC TC74VCX157FK (EL)
IC023	6-711-488-01 s	IC TC74VCX157FK (EL)
IC026	6-703-181-01 s	IC TC74VCX74FT (EL)
IC027	6-703-181-01 s	IC TC74VCX74FT (EL)
IC028	6-704-099-01 s	IC TC7WZ08FK
IC101	6-706-482-01 s	IC TC7SH00FU
IC105	6-711-485-01 s	IC TC74VCX125FK (EL)
IC106	6-711-485-01 s	IC TC74VCX125FK (EL)
IC201	8-759-549-20 s	IC SN74LV541APWR
IC202	8-759-573-97 s	IC SN74LVC541APWR
IC203	8-759-573-97 s	IC SN74LVC541APWR
IC204	8-759-672-76 s	IC AK9813BF-E2
IC205	6-708-326-01 s	IC TC74HCT4053AFT (EL)
IC206	6-704-099-01 s	IC TC7WZ08FK
IC207	8-759-327-01 s	IC NJM062V (TE2)
IC208	8-759-327-01 s	IC NJM062V (TE2)
IC209	6-708-326-01 s	IC TC74HCT4053AFT (EL)
L002	1-460-358-11 s	COIL, CHOKE 2.2UH (4018)
L003	1-460-358-11 s	COIL, CHOKE 2.2UH (4018)
L004	1-460-358-11 s	COIL, CHOKE 2.2UH (4018)
L005	1-460-358-11 s	COIL, CHOKE 2.2UH (4018)
Q001	6-550-631-01 s	TRANSISTOR 2SA1797-T100-Q
Q002	6-550-631-01 s	TRANSISTOR 2SA1797-T100-Q
Q003	6-550-631-01 s	TRANSISTOR 2SA1797-T100-Q
Q004	6-550-631-01 s	TRANSISTOR 2SA1797-T100-Q
Q005	6-550-631-01 s	TRANSISTOR 2SA1797-T100-Q
Q006	6-550-631-01 s	TRANSISTOR 2SA1797-T100-Q
Q007	6-550-631-01 s	TRANSISTOR 2SA1797-T100-Q
Q009	6-552-659-01 s	TR SI3443CDV-T1-GE3
Q010	6-552-659-01 s	TR SI3443CDV-T1-GE3
Q201	8-729-927-99 s	TRANSISTOR 2SC4617TL-QR
Q202	8-729-927-99 s	TRANSISTOR 2SC4617TL-QR
Q203	8-729-928-19 s	TRANSISTOR 2SA1774TL-QR
Q204	8-729-107-04 s	TRANSISTOR 2SB1115-T1YL
Q205	8-729-015-48 s	TRANSISTOR 2SK1062 (TE85L)
Q206	8-729-927-99 s	TRANSISTOR 2SC4617TL-QR
Q207	8-729-927-99 s	TRANSISTOR 2SC4617TL-QR
Q208	8-729-927-99 s	TRANSISTOR 2SC4617TL-QR
Q209	8-729-928-19 s	TRANSISTOR 2SA1774TL-QR
Q210	8-729-927-99 s	TRANSISTOR 2SC4617TL-QR
Q211	8-729-928-19 s	TRANSISTOR 2SA1774TL-QR
Q212	8-729-053-11 s	TRANSISTOR FDC6561AN
Q213	8-729-053-11 s	TRANSISTOR FDC6561AN
Q214	8-729-053-12 s	TRANSISTOR FDC6506P
Q215	8-729-053-12 s	TRANSISTOR FDC6506P
Q216	8-729-053-11 s	TRANSISTOR FDC6561AN
Q217	8-729-053-12 s	TRANSISTOR FDC6506P
Q218	8-729-053-11 s	TRANSISTOR FDC6561AN
Q219	8-729-053-12 s	TRANSISTOR FDC6506P
Q220	8-729-053-11 s	TRANSISTOR FDC6561AN
Q221	8-729-053-12 s	TRANSISTOR FDC6506P
Q222	8-729-053-11 s	TRANSISTOR FDC6561AN
Q223	8-729-053-12 s	TRANSISTOR FDC6506P
R001	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R005	1-250-523-11 o	RES, METAL FILM CHIP 15K(1005)
R006	1-250-491-11 o	RES, METAL FILM CHIP 680(1005)
R007	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R008	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R009	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R010	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R011	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R012	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R014	1-218-990-81 s	CONDUCTOR, CHIP (1005)

TG-287 BOARD

Ref. No. or Q'ty	Part No.	SP Description
R015	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R016	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R017	1-250-503-11 o	RES, METAL FILM CHIP 2.2K(1005)
R018	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R019	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R020	1-250-503-11 o	RES, METAL FILM CHIP 2.2K(1005)
R021	1-250-511-11 o	RES, METAL FILM CHIP 4.7K(1005)
R022	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R023	1-250-487-11 s	RES, METAL FILM CHIP 470(1005)
R024	1-250-507-11 o	RES, METAL FILM CHIP 3.3K(1005)
R025	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R026	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R027	1-216-864-91 s	CONDUCTOR, CHIP (1608)
R029	1-216-864-91 s	CONDUCTOR, CHIP (1608)
R031	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R032	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R033	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R034	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R035	1-250-511-11 o	RES, METAL FILM CHIP 4.7K(1005)
R036	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R037	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R038	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R039	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R040	1-250-523-11 o	RES, METAL FILM CHIP 15K(1005)
R041	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R042	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R044	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R045	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R046	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R047	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R048	1-250-511-11 o	RES, METAL FILM CHIP 4.7K(1005)
R049	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R051	1-250-523-11 o	RES, METAL FILM CHIP 15K(1005)
R052	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R053	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R054	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R055	1-250-543-11 o	RES, METAL FILM CHIP 100K(1005)
R057	1-250-495-11 s	RES, METAL FILM CHIP 1.0K(1005)
R059	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R060	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R062	1-250-511-11 o	RES, METAL FILM CHIP 4.7K(1005)
R063	1-250-511-11 o	RES, METAL FILM CHIP 4.7K(1005)
R064	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R065	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R074	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R076	1-250-495-11 s	RES, METAL FILM CHIP 1.0K(1005)
R077	1-250-495-11 s	RES, METAL FILM CHIP 1.0K(1005)
R078	1-250-495-11 s	RES, METAL FILM CHIP 1.0K(1005)
R079	1-250-495-11 s	RES, METAL FILM CHIP 1.0K(1005)
R081	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R084	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R085	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R086	1-250-543-11 o	RES, METAL FILM CHIP 100K(1005)
R087	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R093	1-250-543-11 o	RES, METAL FILM CHIP 100K(1005)
R094	1-250-543-11 o	RES, METAL FILM CHIP 100K(1005)
R095	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R096	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R097	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R099	1-250-511-11 o	RES, METAL FILM CHIP 4.7K(1005)
R100	1-250-511-11 o	RES, METAL FILM CHIP 4.7K(1005)
R101	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R102	1-250-499-11 o	RES, METAL FILM CHIP 1.5K(1005)
R105	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R107	1-250-567-11 s	RES, METAL FILM CHIP 1M (1005)

TG-287 BOARD

Ref. No. or Q'ty	Part No.	SP Description
R121	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R122	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R130	1-250-471-11 s	RES, METAL FILM CHIP 100 (1005)
R132	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R137	1-250-471-11 s	RES, METAL FILM CHIP 100 (1005)
R140	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R142	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R144	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R145	1-250-471-11 s	RES, METAL FILM CHIP 100 (1005)
R149	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R153	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R154	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R155	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R156	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R166	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R174	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R175	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R176	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R177	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R178	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R179	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R181	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R182	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R184	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R187	1-250-471-11 s	RES, METAL FILM CHIP 100 (1005)
R188	1-250-471-11 s	RES, METAL FILM CHIP 100 (1005)
R189	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R190	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R191	1-250-471-11 s	RES, METAL FILM CHIP 100 (1005)
R192	1-250-471-11 s	RES, METAL FILM CHIP 100 (1005)
R193	1-250-471-11 s	RES, METAL FILM CHIP 100 (1005)
R194	1-250-471-11 s	RES, METAL FILM CHIP 100 (1005)
R195	1-250-471-11 s	RES, METAL FILM CHIP 100 (1005)
R196	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R197	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R198	1-250-467-11 s	RES, METAL FILM CHIP 68 (1005)
R199	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R201	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R202	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R203	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R204	1-250-515-11 s	RES,METAL FILM CHIP 6.8K(1005)
R205	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R206	1-250-515-11 s	RES,METAL FILM CHIP 6.8K(1005)
R207	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R208	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R209	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R210	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R211	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R213	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R216	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R217	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R218	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R219	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R220	1-216-864-91 s	CONDUCTOR, CHIP (1608)
R221	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R222	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R224	1-216-797-91 s	RES, CHIP 10 (1608)
R225	1-216-797-91 s	RES, CHIP 10 (1608)
R226	1-216-797-91 s	RES, CHIP 10 (1608)
R227	1-216-797-91 s	RES, CHIP 10 (1608)
R228	1-216-801-91 s	RES, CHIP 22 (1608)
R229	1-216-801-91 s	RES, CHIP 22 (1608)
R230	1-216-797-91 s	RES, CHIP 10 (1608)
R231	1-216-797-91 s	RES, CHIP 10 (1608)
R233	1-216-864-91 s	CONDUCTOR, CHIP (1608)

TG-287 BOARD

Ref. No. or Q'ty	Part No.	SP Description
R234	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R236	1-216-864-91 s	CONDUCTOR, CHIP (1608)
R237	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R238	1-250-523-11 o	RES, METAL FILM CHIP 15K(1005)
R239	1-250-507-11 o	RES,METAL FILM CHIP 3.3K(1005)
R240	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R241	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R242	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R243	1-250-507-11 o	RES,METAL FILM CHIP 3.3K(1005)
R244	1-250-507-11 o	RES,METAL FILM CHIP 3.3K(1005)
R245	1-250-507-11 o	RES,METAL FILM CHIP 3.3K(1005)
R246	1-216-864-91 s	CONDUCTOR, CHIP (1608)
R248	1-250-523-11 o	RES, METAL FILM CHIP 15K(1005)
R249	1-250-523-11 o	RES, METAL FILM CHIP 15K(1005)
R250	1-250-523-11 o	RES, METAL FILM CHIP 15K(1005)
R251	1-216-864-91 s	CONDUCTOR, CHIP (1608)
R253	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R254	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R255	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R257	1-216-864-91 s	CONDUCTOR, CHIP (1608)
R258	1-250-567-11 s	RES, METAL FILM CHIP 1M (1005)
R259	1-250-567-11 s	RES, METAL FILM CHIP 1M (1005)
R260	1-250-567-11 s	RES, METAL FILM CHIP 1M (1005)
R262	1-216-864-91 s	CONDUCTOR, CHIP (1608)
R264	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R266	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R267	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R274	1-250-467-11 s	RES, METAL FILM CHIP 68 (1005)
R275	1-250-467-11 s	RES, METAL FILM CHIP 68 (1005)
R280	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R283	1-250-467-11 s	RES, METAL FILM CHIP 68 (1005)
R284	1-250-467-11 s	RES, METAL FILM CHIP 68 (1005)
R290	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R291	1-250-467-11 s	RES, METAL FILM CHIP 68 (1005)
R292	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R298	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R301	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R302	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R303	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R304	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R305	1-250-467-11 s	RES, METAL FILM CHIP 68 (1005)
R306	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R307	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R308	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R309	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R310	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R311	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R314	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R315	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R316	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R322	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R323	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R324	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R325	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R326	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R327	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R330	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R332	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R333	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R335	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R337	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R338	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R339	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R341	1-216-864-91 s	CONDUCTOR, CHIP (1608)
R342	1-218-990-81 s	CONDUCTOR, CHIP (1005)

TG-287 BOARD


Ref. No. or Q'ty	Part No.	SP Description
R344	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R345	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R346	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R348	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R350	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R355	1-250-471-11 s	RES, METAL FILM CHIP 100 (1005)
R356	1-250-471-11 s	RES, METAL FILM CHIP 100 (1005)
R362	1-250-471-11 s	RES, METAL FILM CHIP 100 (1005)
R363	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R365	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R368	1-216-864-91 s	CONDUCTOR, CHIP (1608)
R369	1-250-495-11 s	RES, METAL FILM CHIP 1.0K (1005)
R401	1-250-471-11 s	RES, METAL FILM CHIP 100 (1005)
R407	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R411	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R415	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R419	1-250-535-11 s	RES, METAL FILM CHIP 47K (1005)
RB201	1-234-381-21 s	RES, NETWORK 100K (1005X4)
RB202	1-234-381-21 s	RES, NETWORK 100K (1005X4)
RB203	1-234-381-21 s	RES, NETWORK 100K (1005X4)
RB204	1-234-381-21 s	RES, NETWORK 100K (1005X4)
TP001	1-535-757-21 s	CHIP, CHECKER
TP002	1-535-757-21 s	CHIP, CHECKER
TP003	1-535-757-21 s	CHIP, CHECKER
TP004	1-535-757-21 s	CHIP, CHECKER
VCO001	1-814-511-11 s	OSCILLATOR, CRYSTAL VCXO 148.3
VCO002	1-814-512-11 s	OSCILLATOR, CRYSTAL VCXO 148.5

Section 2


Schematic Diagrams

AU-360

AU-360 (1/9)

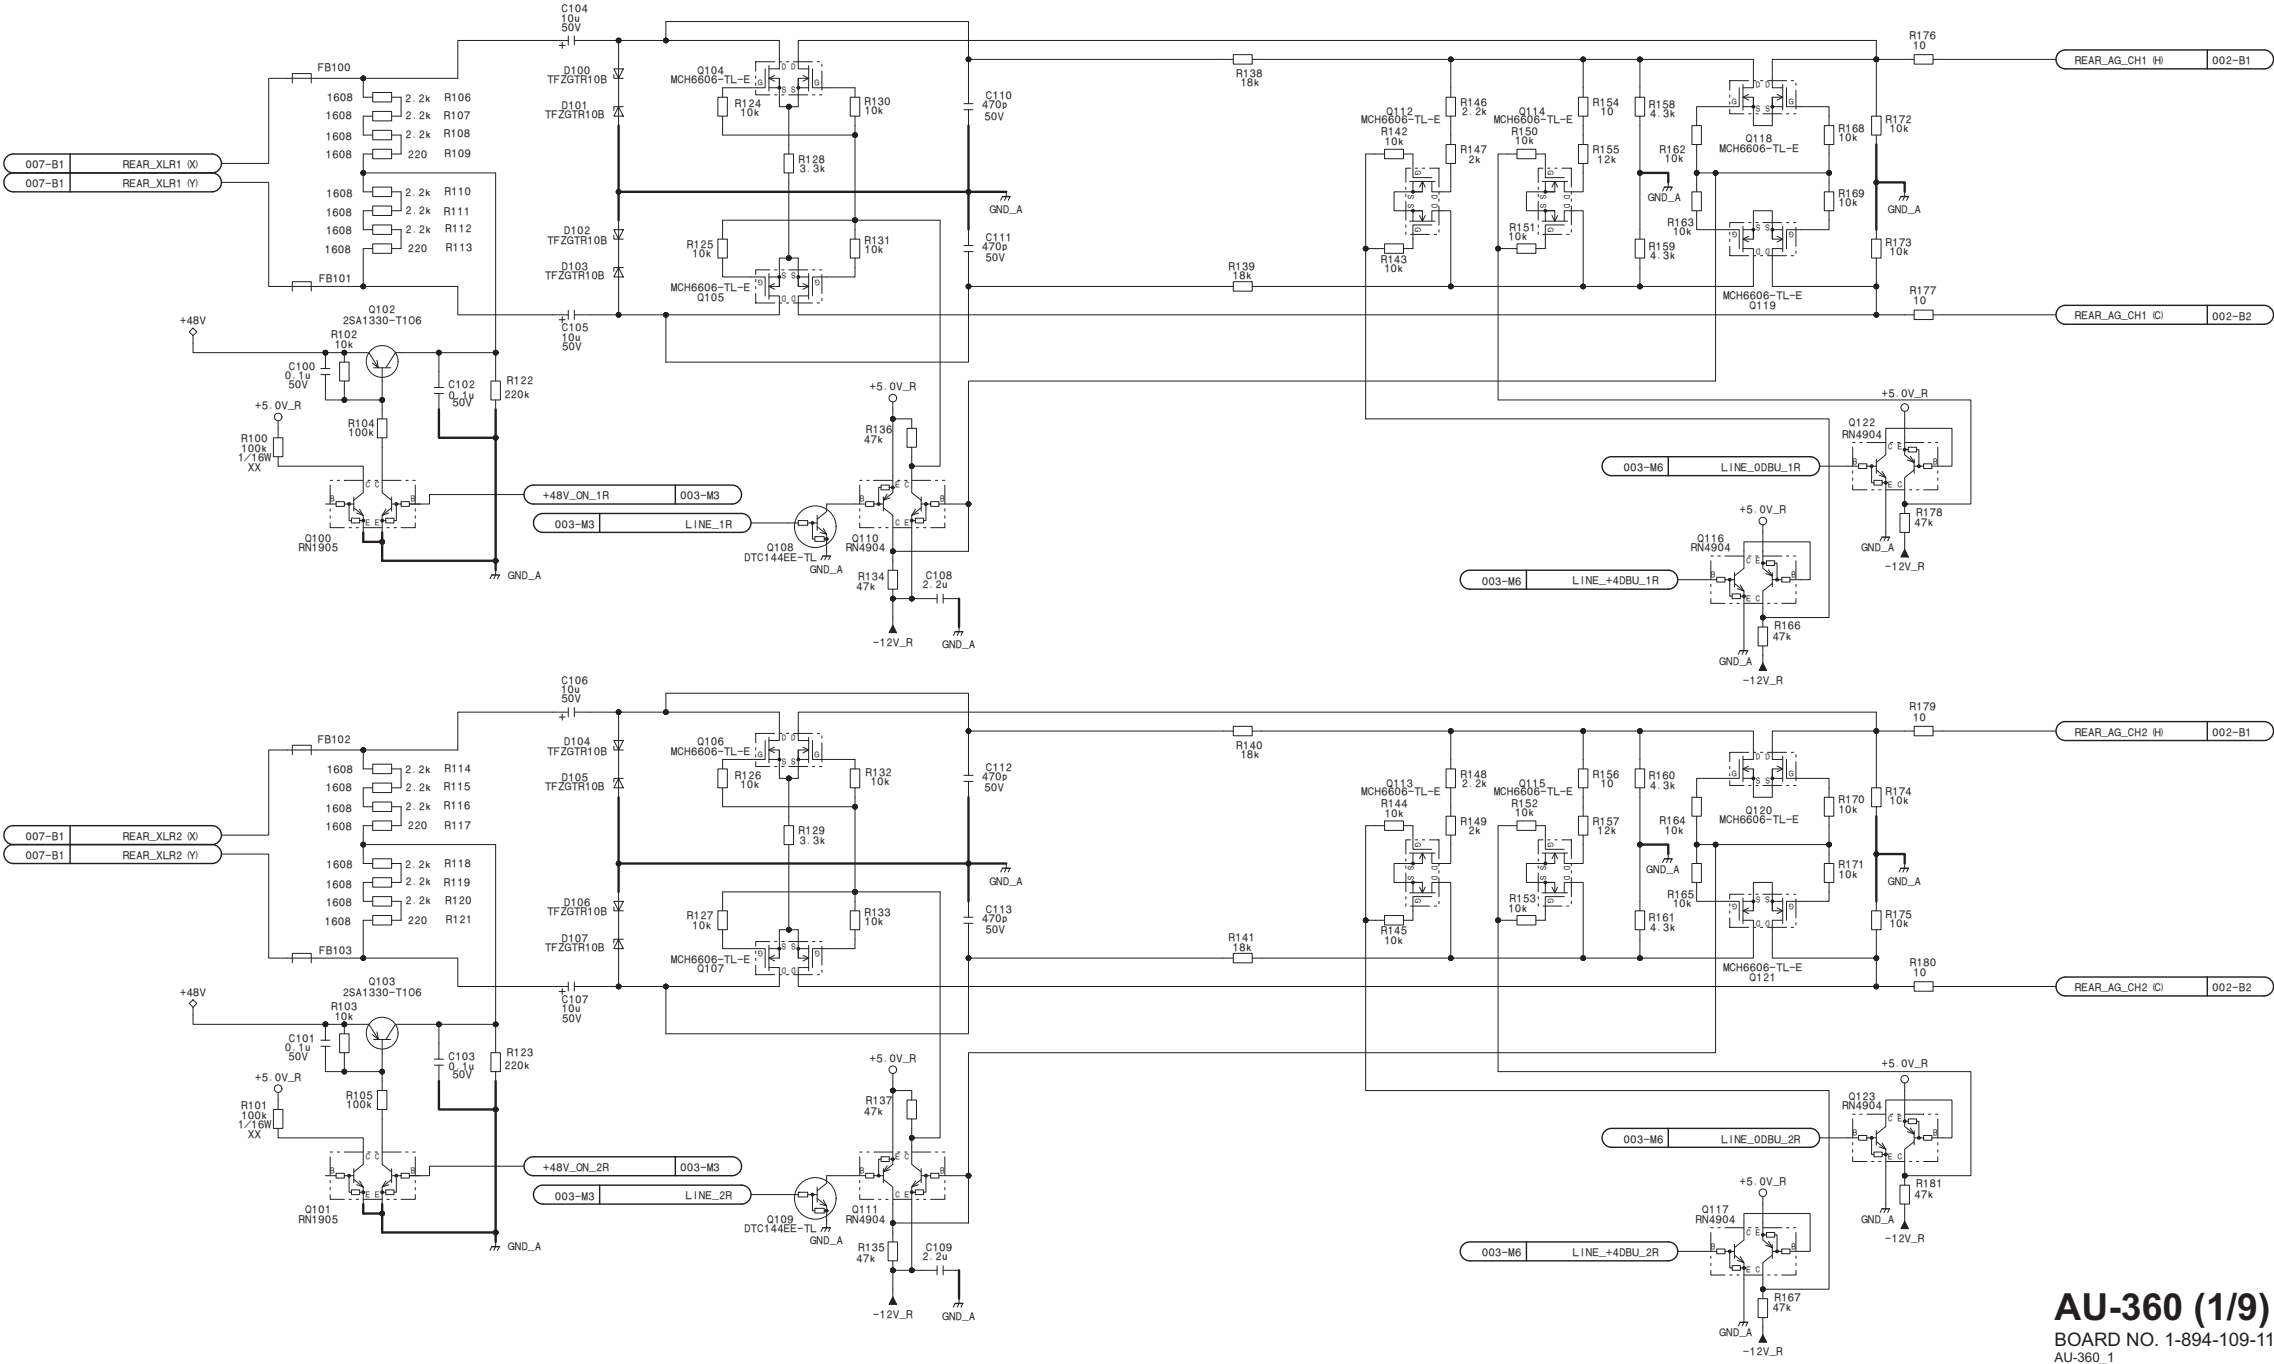


AU-360 (2/9)

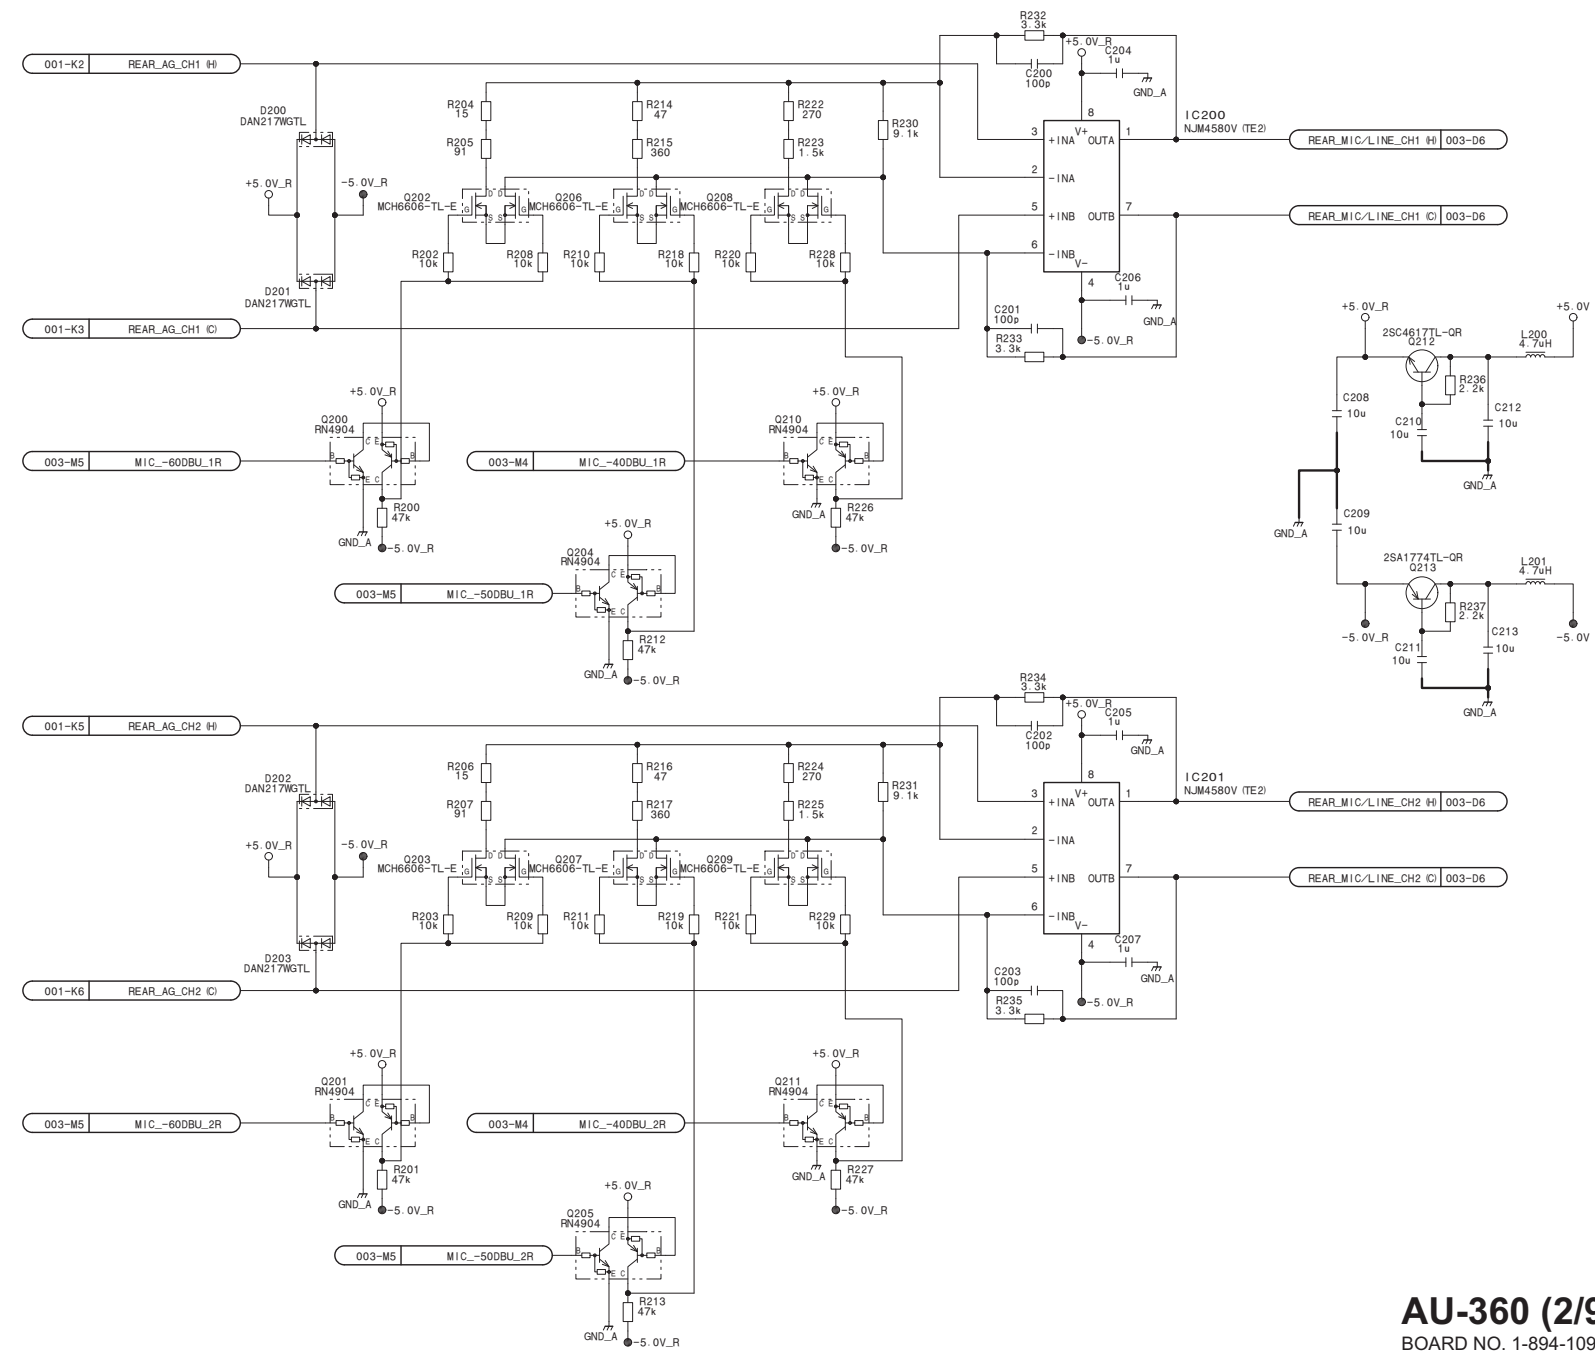

AU-360 (2/9)


BOARD NO. 1-894-109-11
AU-360_2


AU-360 (3/9)

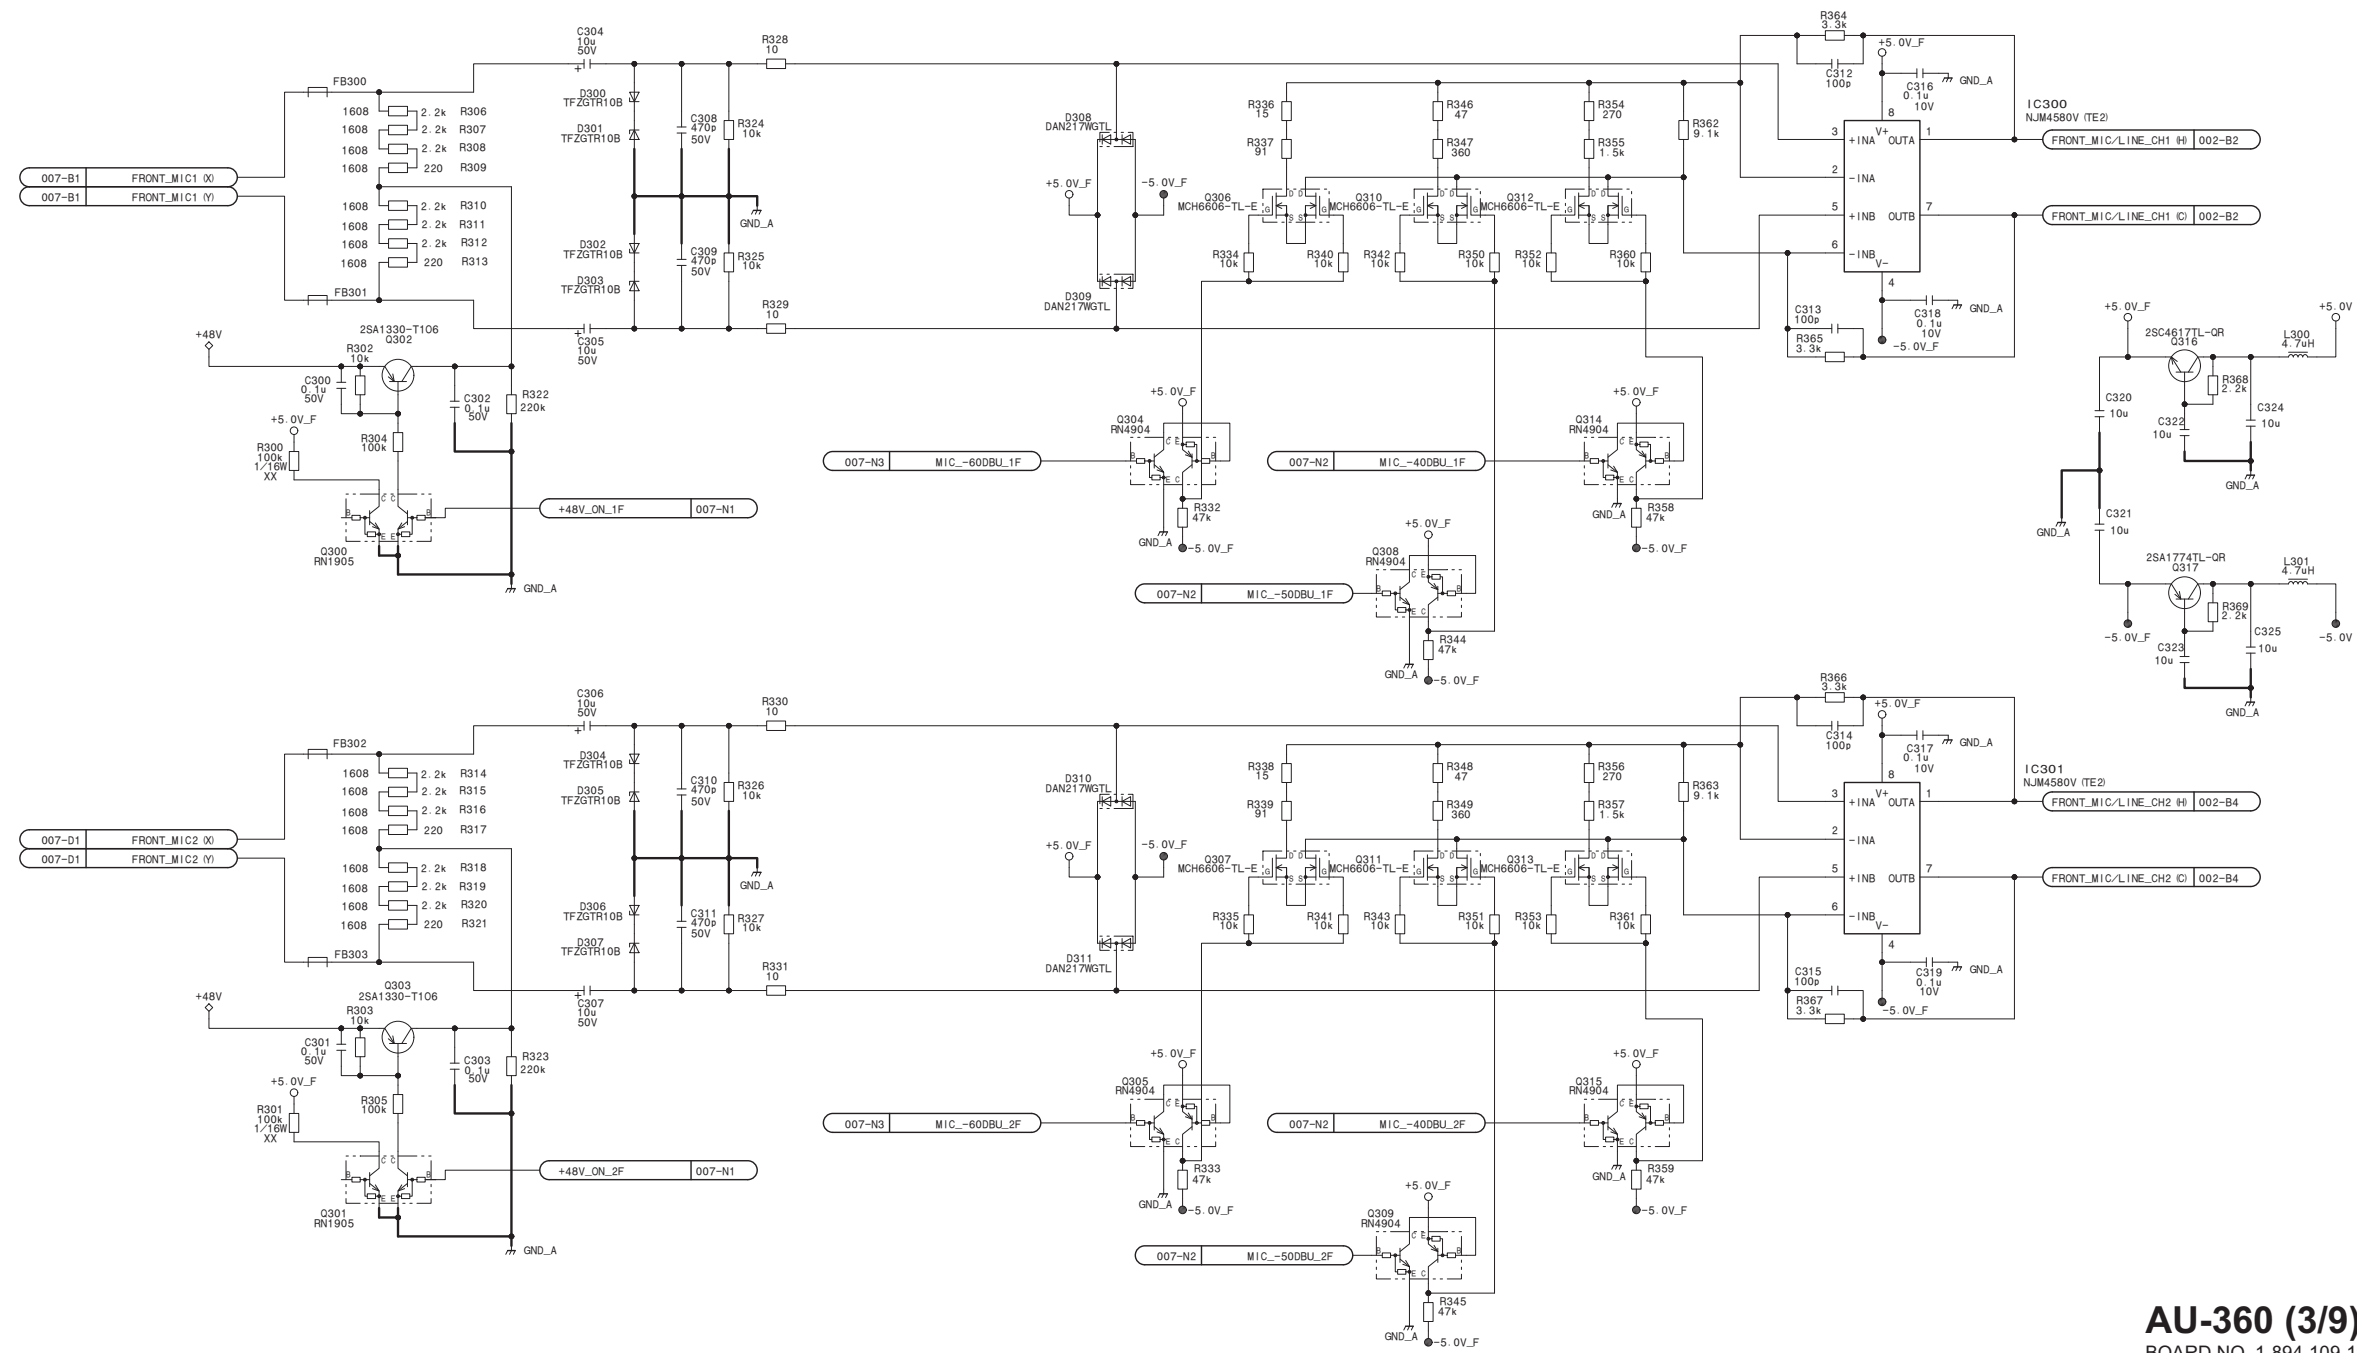

AU-360 (3/9)


BOARD NO. 1-894-109-11
AU-360_3

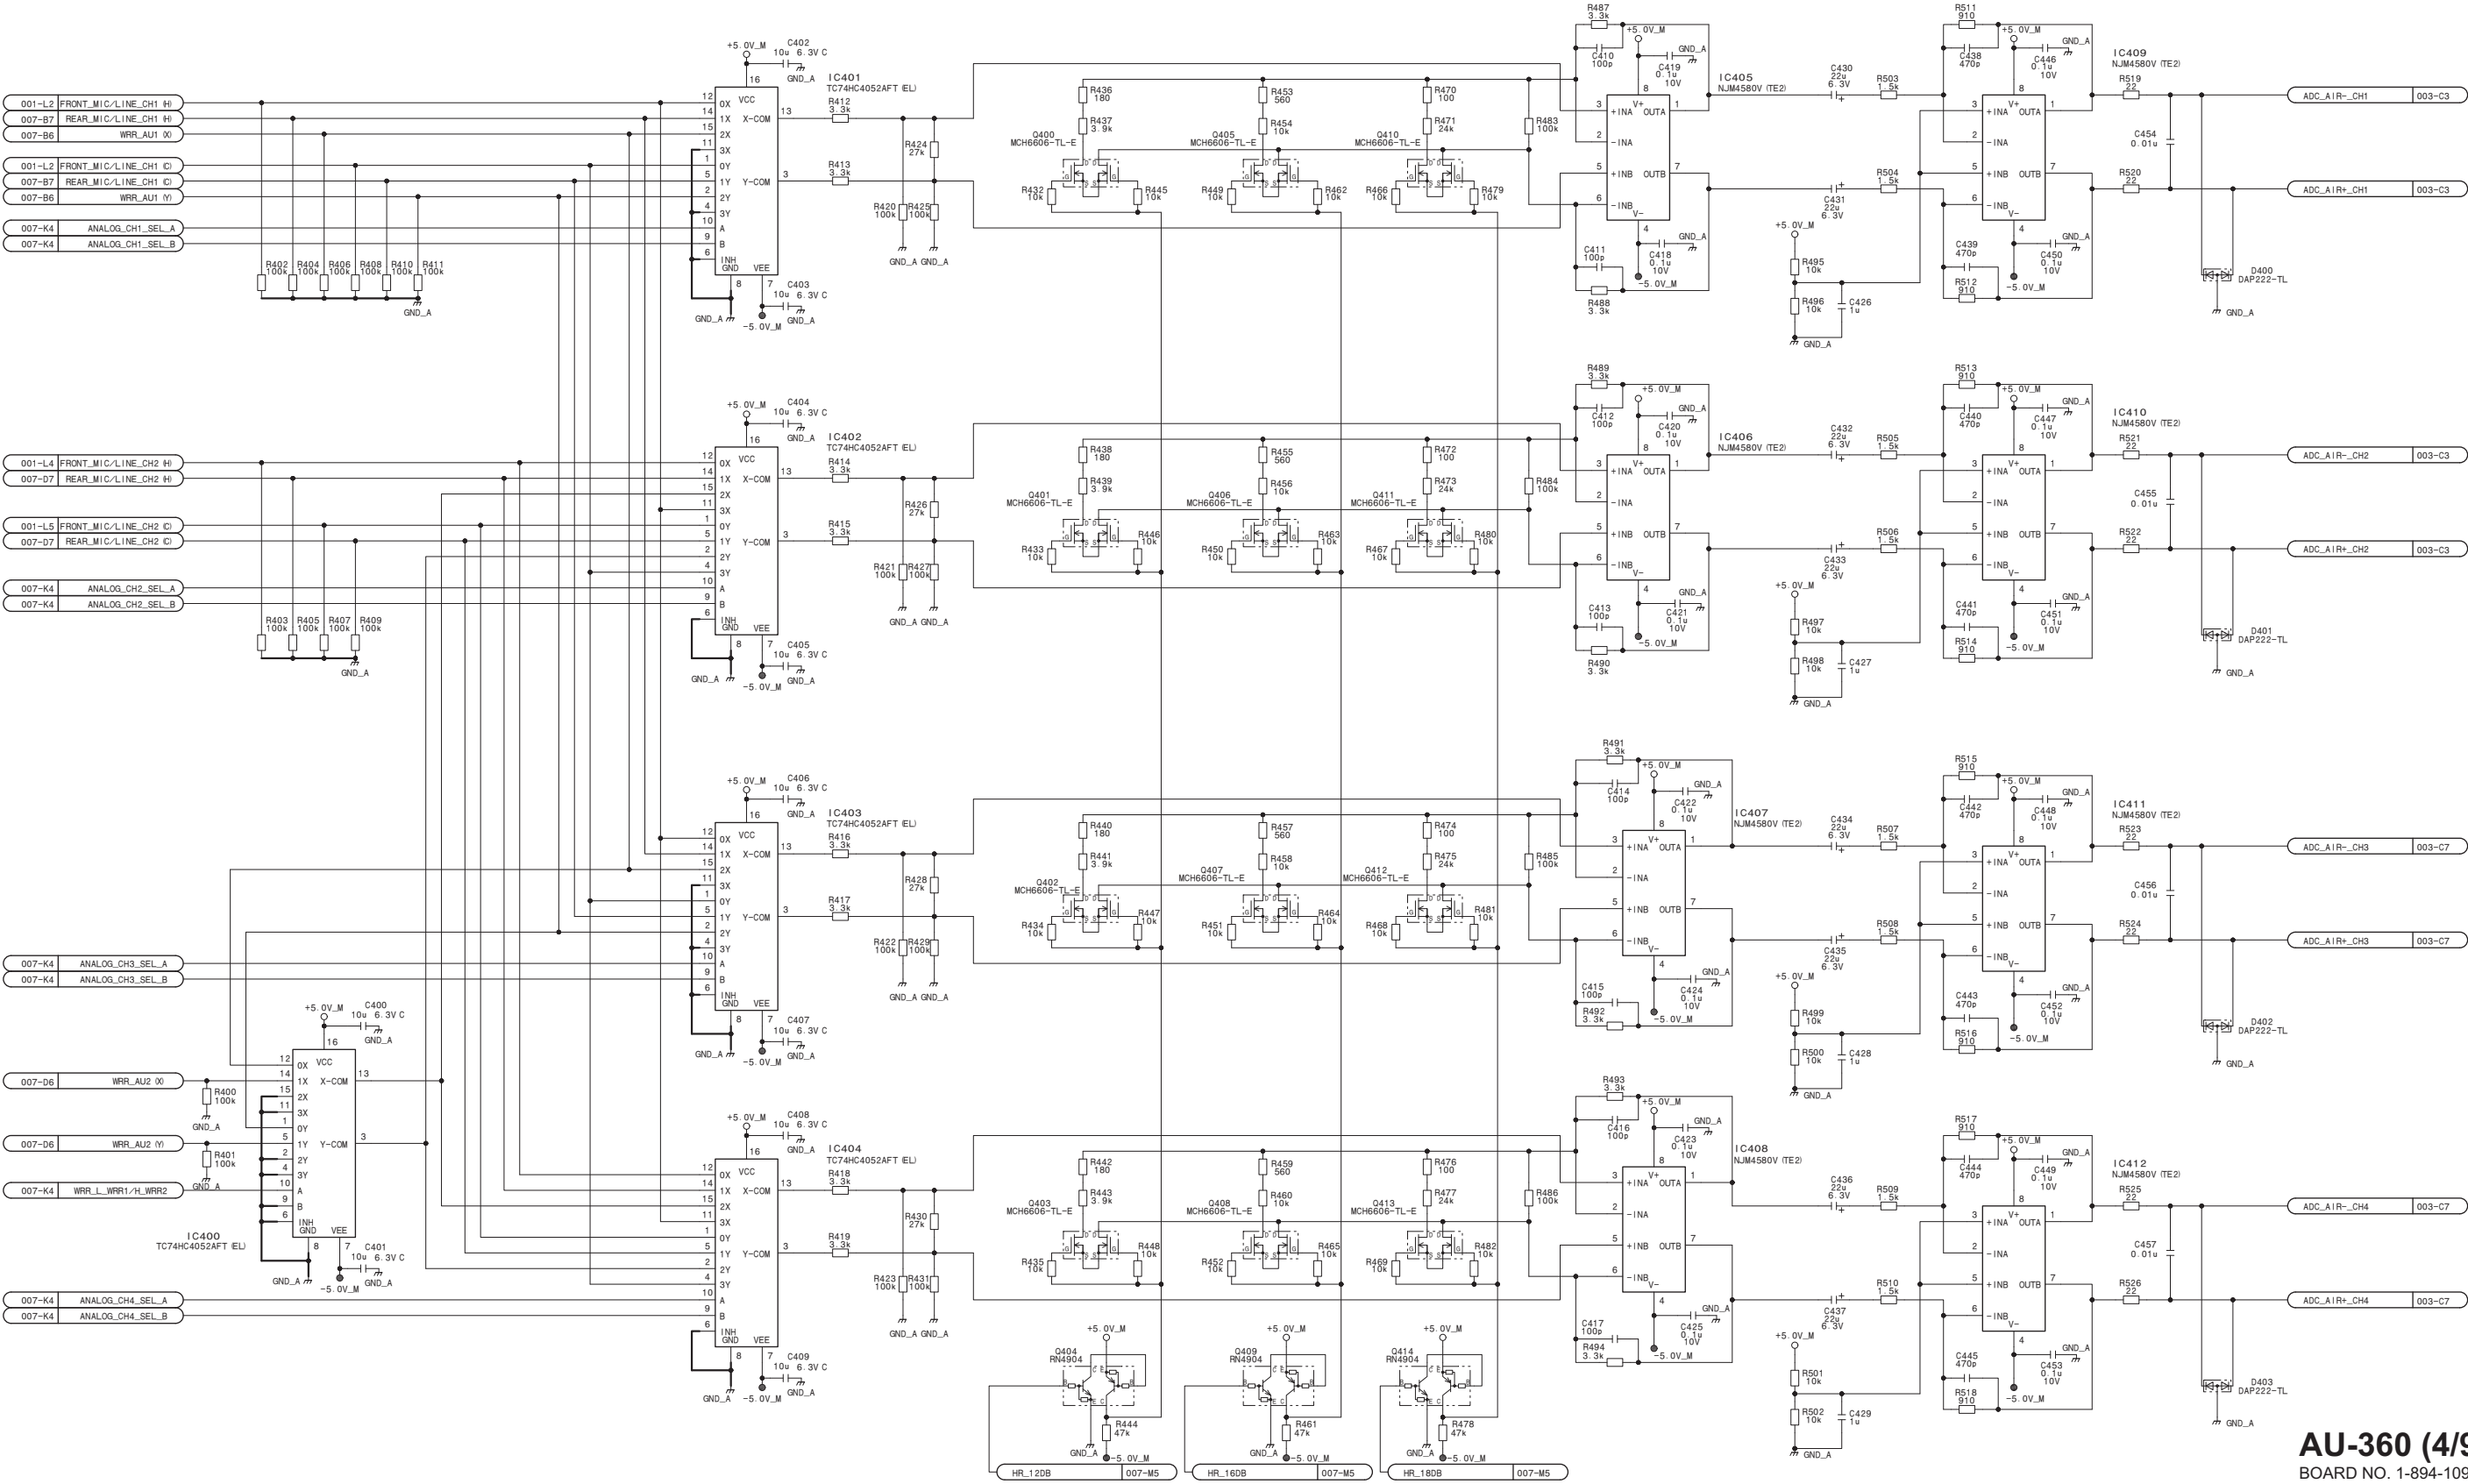

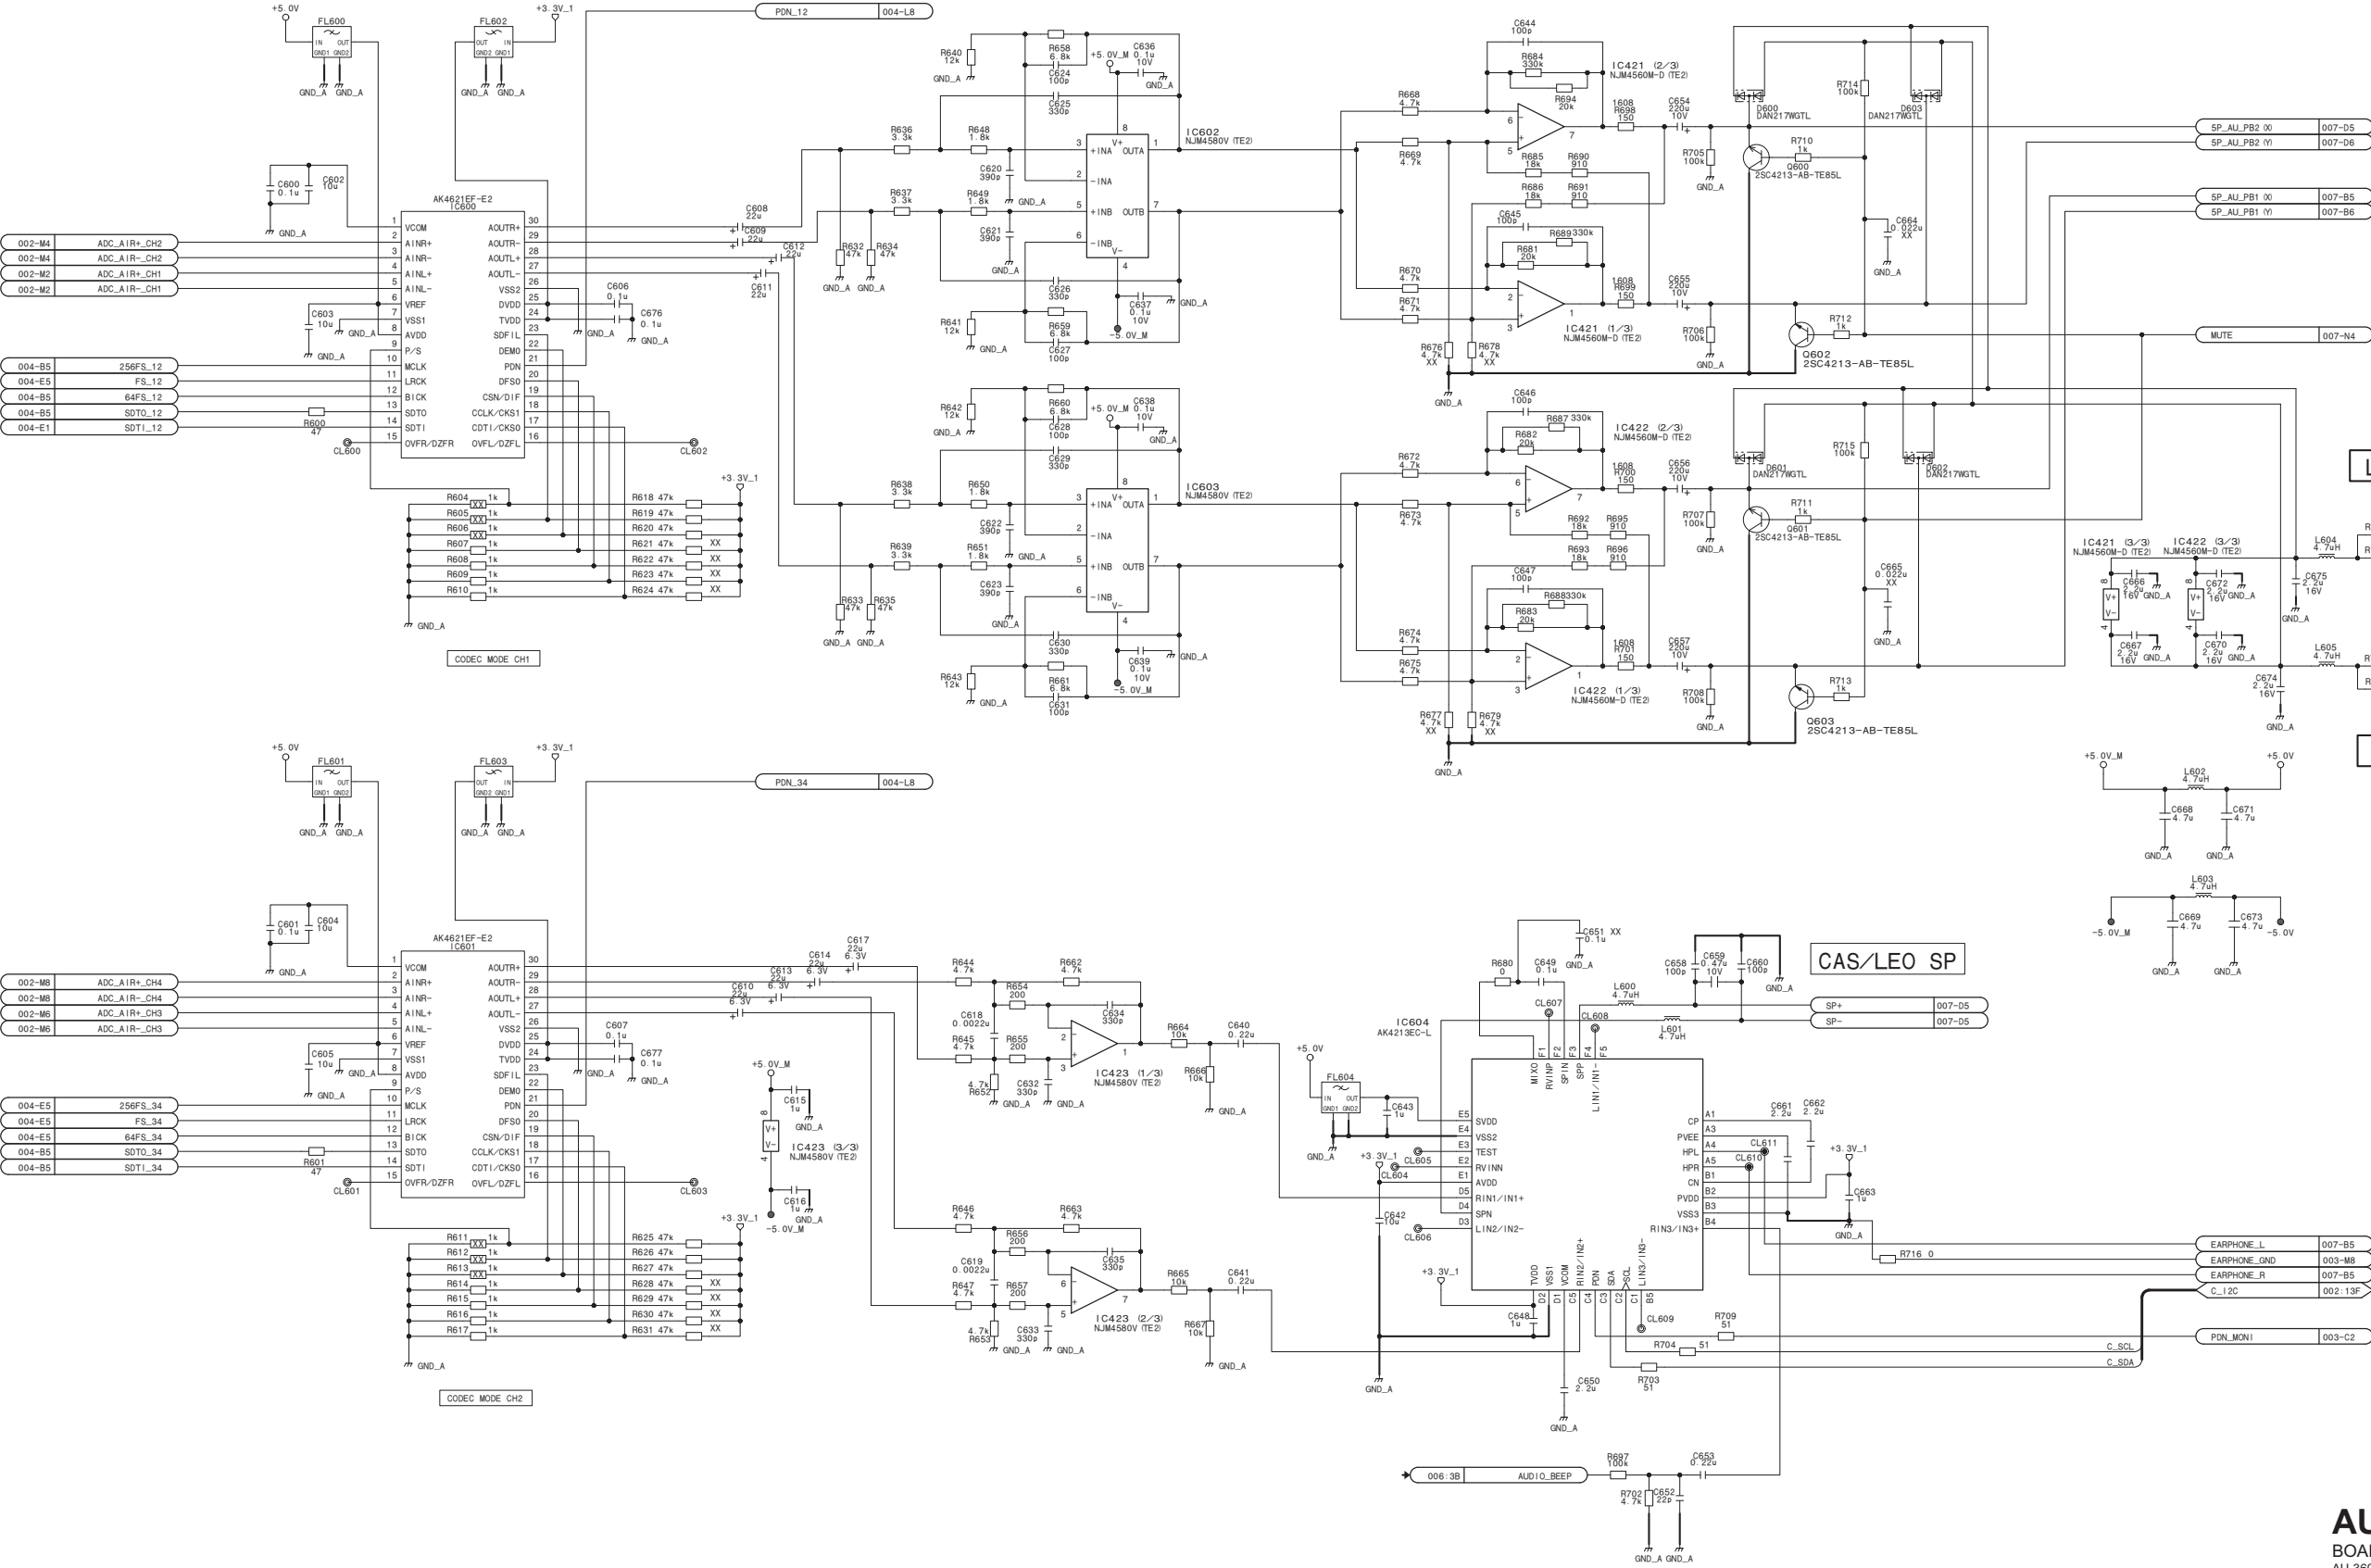



(Audio FPGA)

Config CLK PO PI
HIF Bank 1 2.5V Bank 2 3.3V Bank 3 3.3V HPI
SRC SRC AU_Out
AU_In

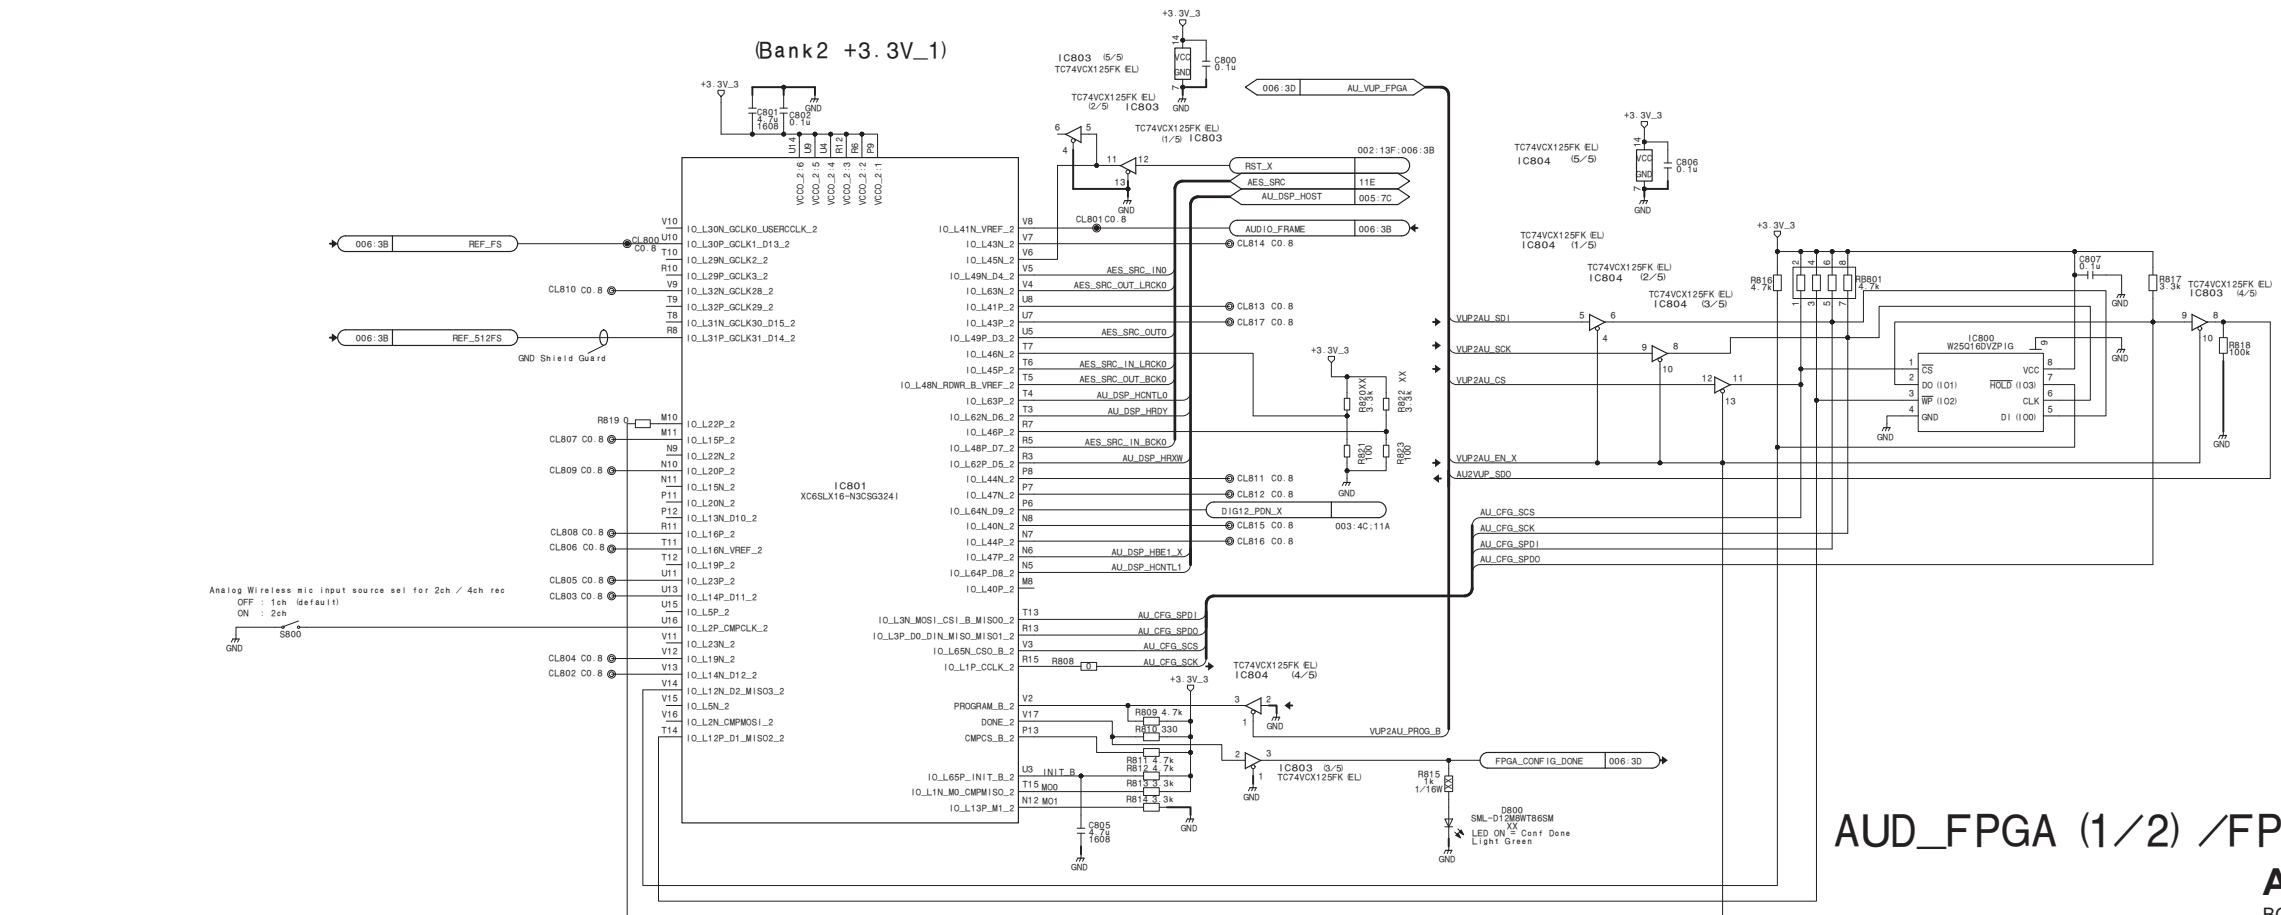


AU-360 (6/9)
BOARD NO. 1-894-109-11
AU-360_6

AU-360 (7/9)

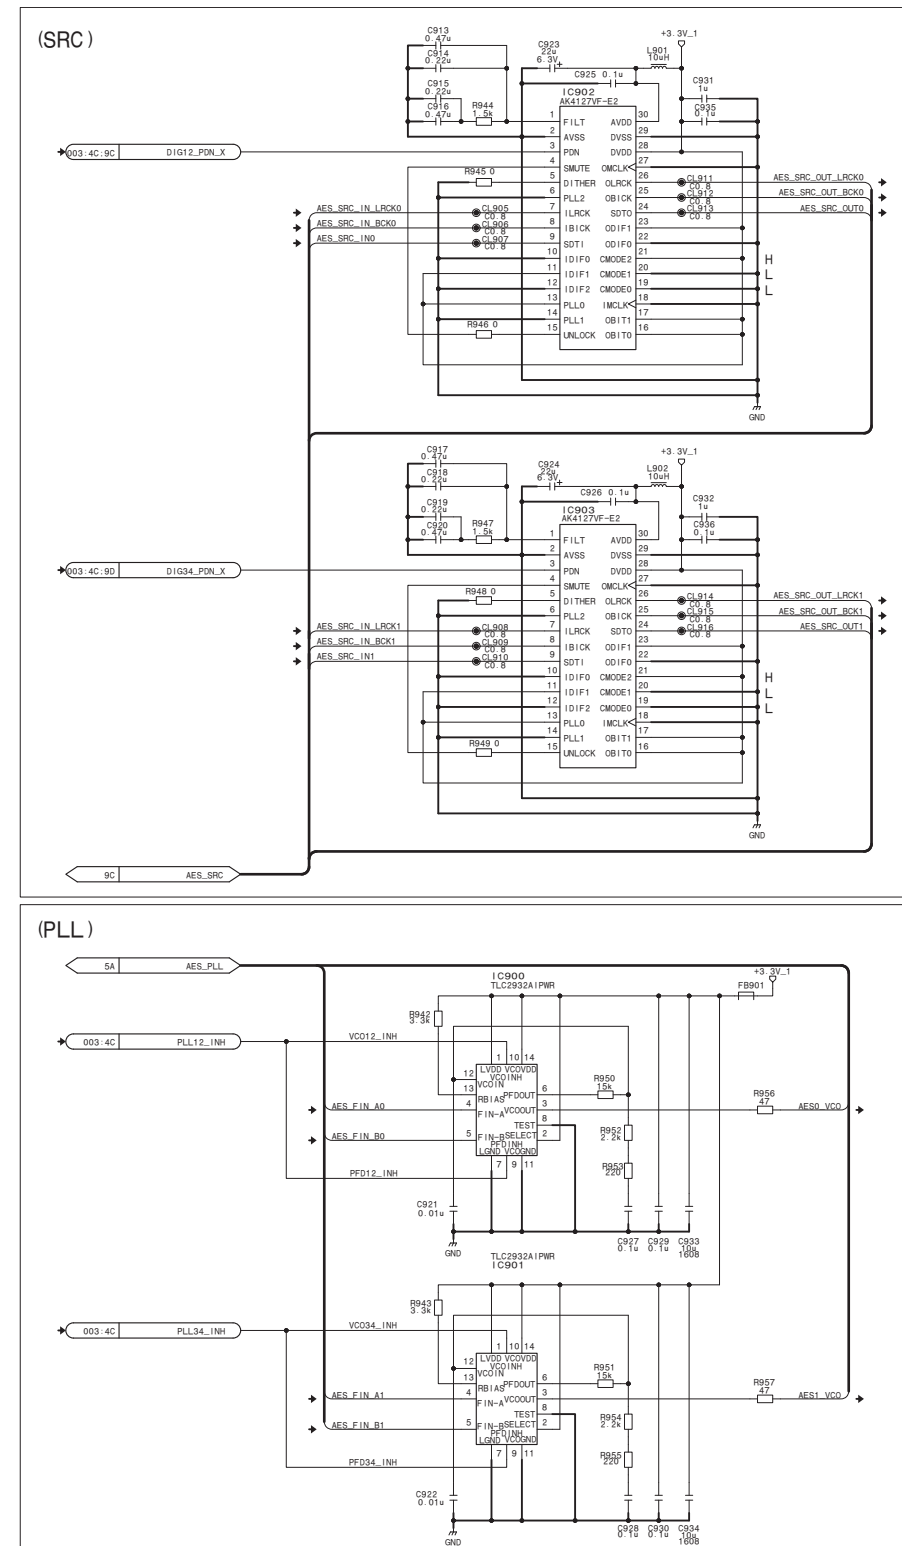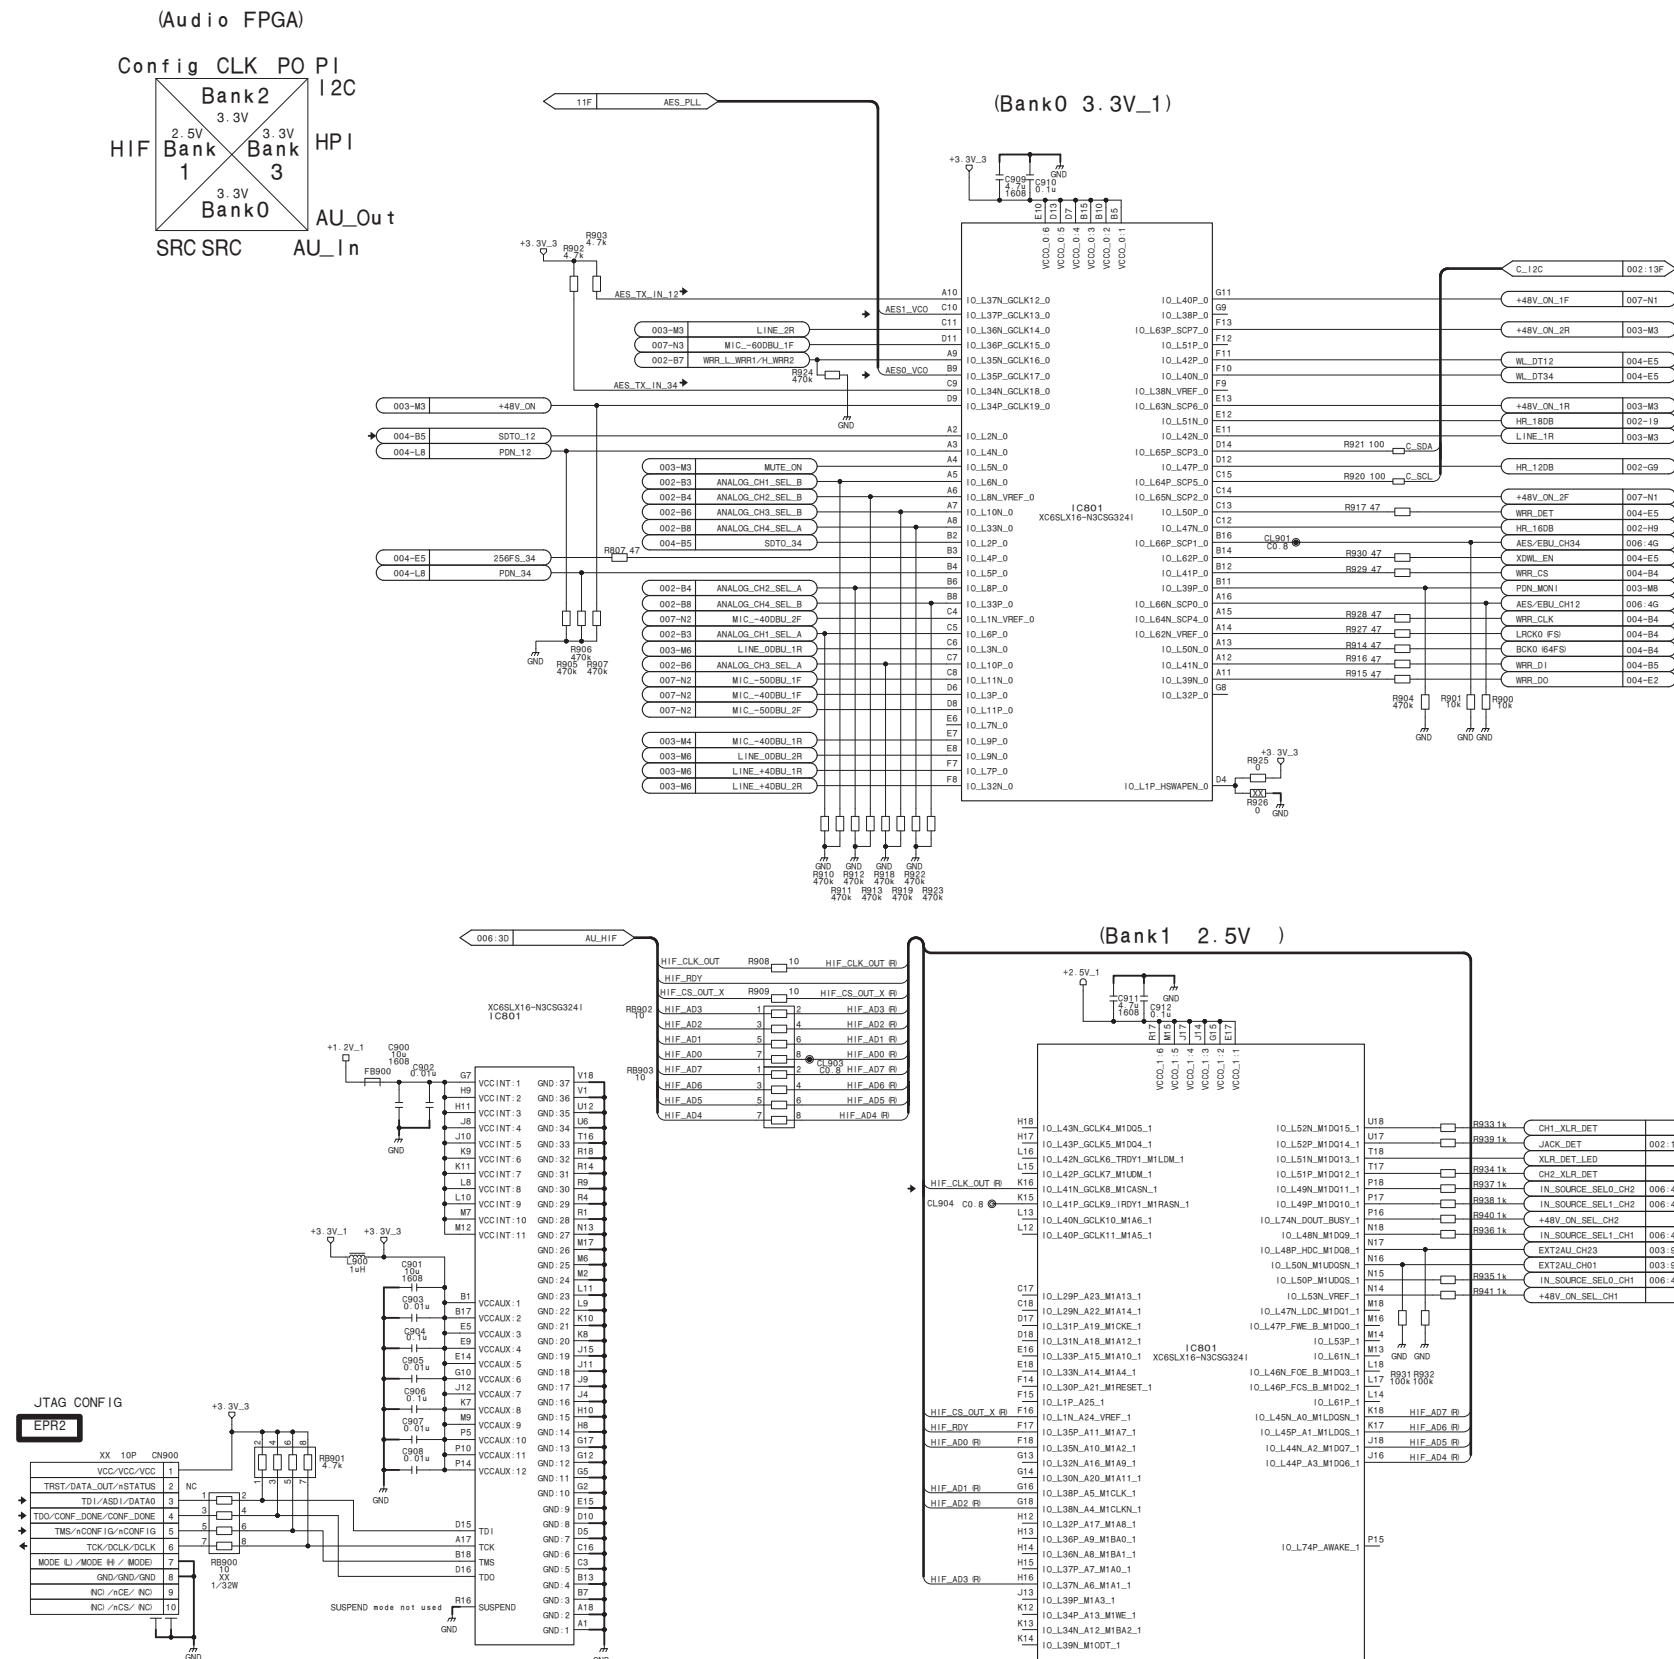

AUD_FPGA (2/2) /SRC/PLL
AU-360 (7/9)
 BOARD NO. 1-894-109-11
 AU-360_7

AU-360 (8/9)











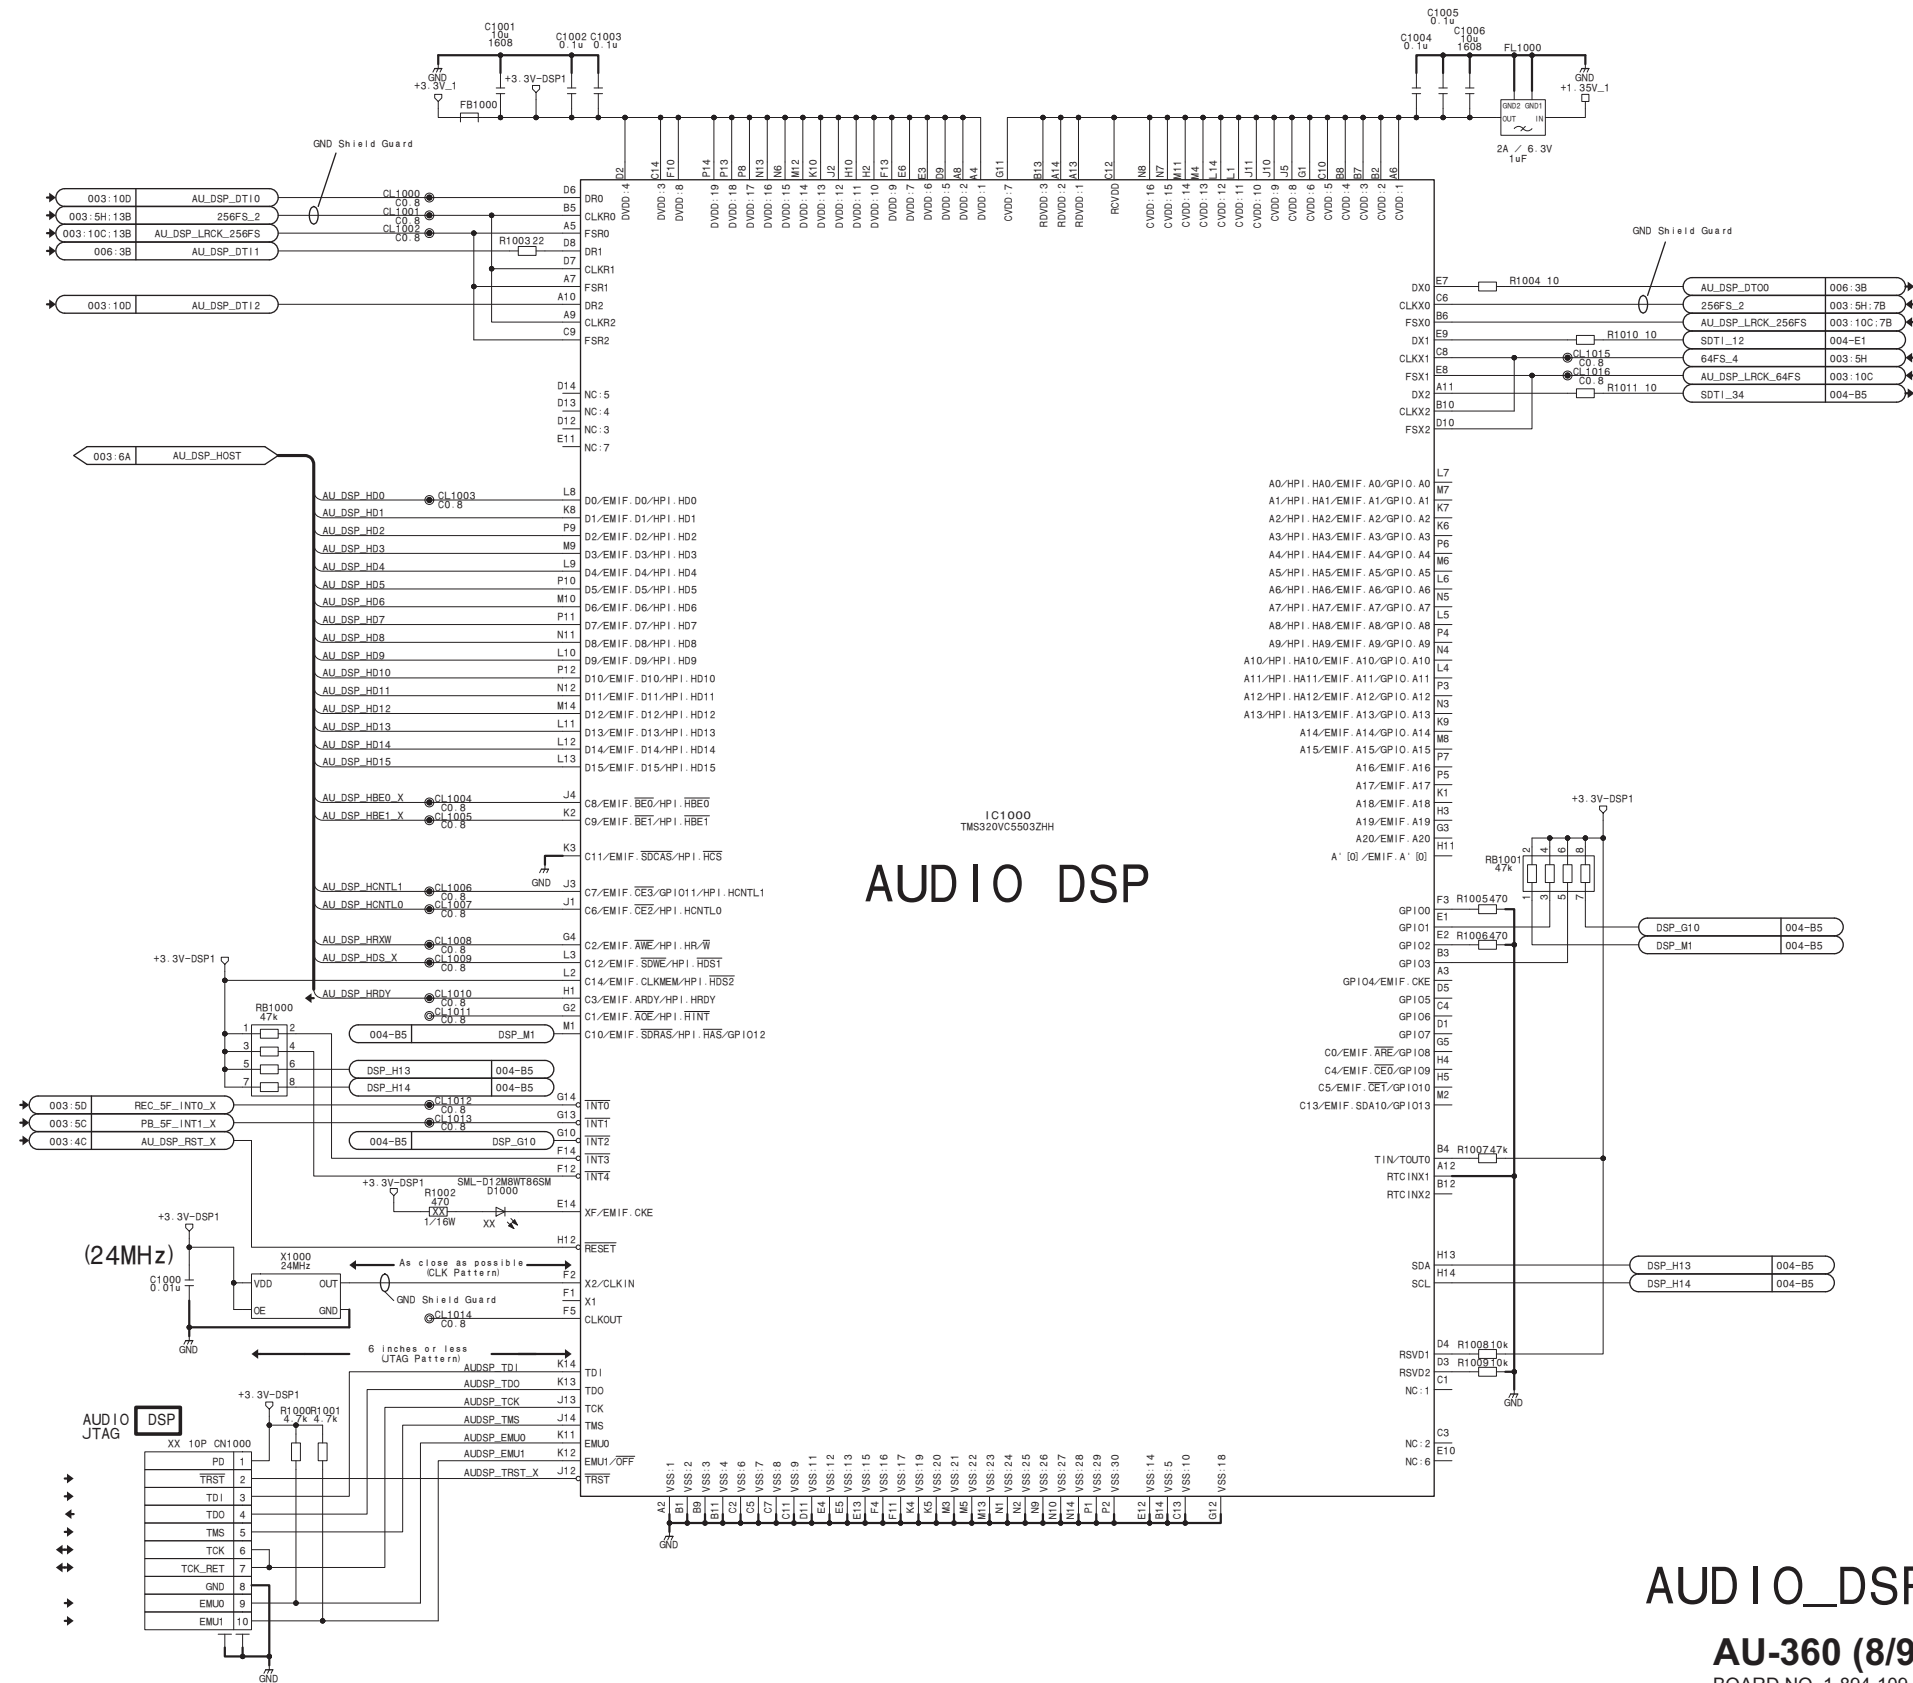


AUDIO_DSP

AU-360 (8/9)


BOARD NO. 1-894-109-11
AU-360_8

AU-360 (9/9)

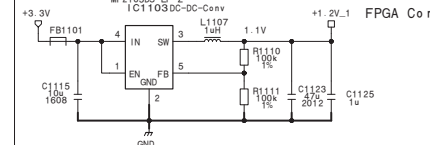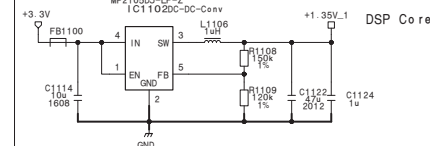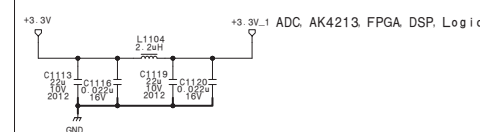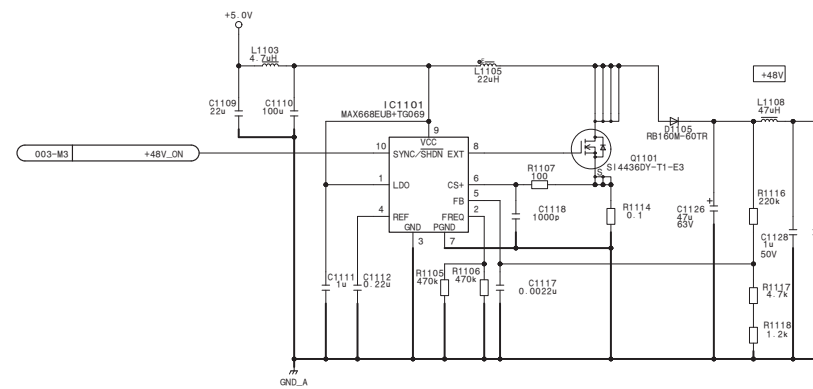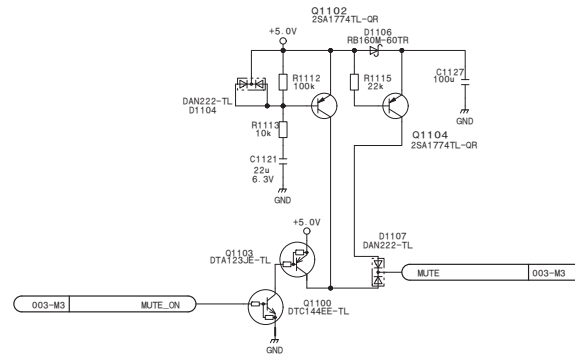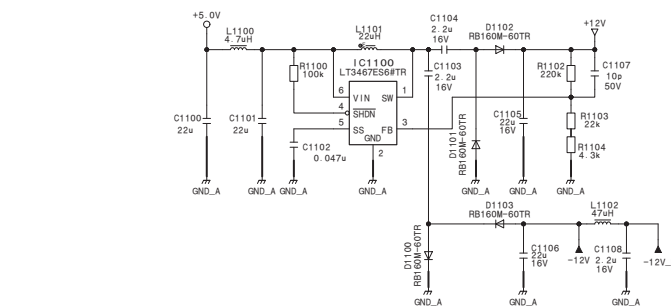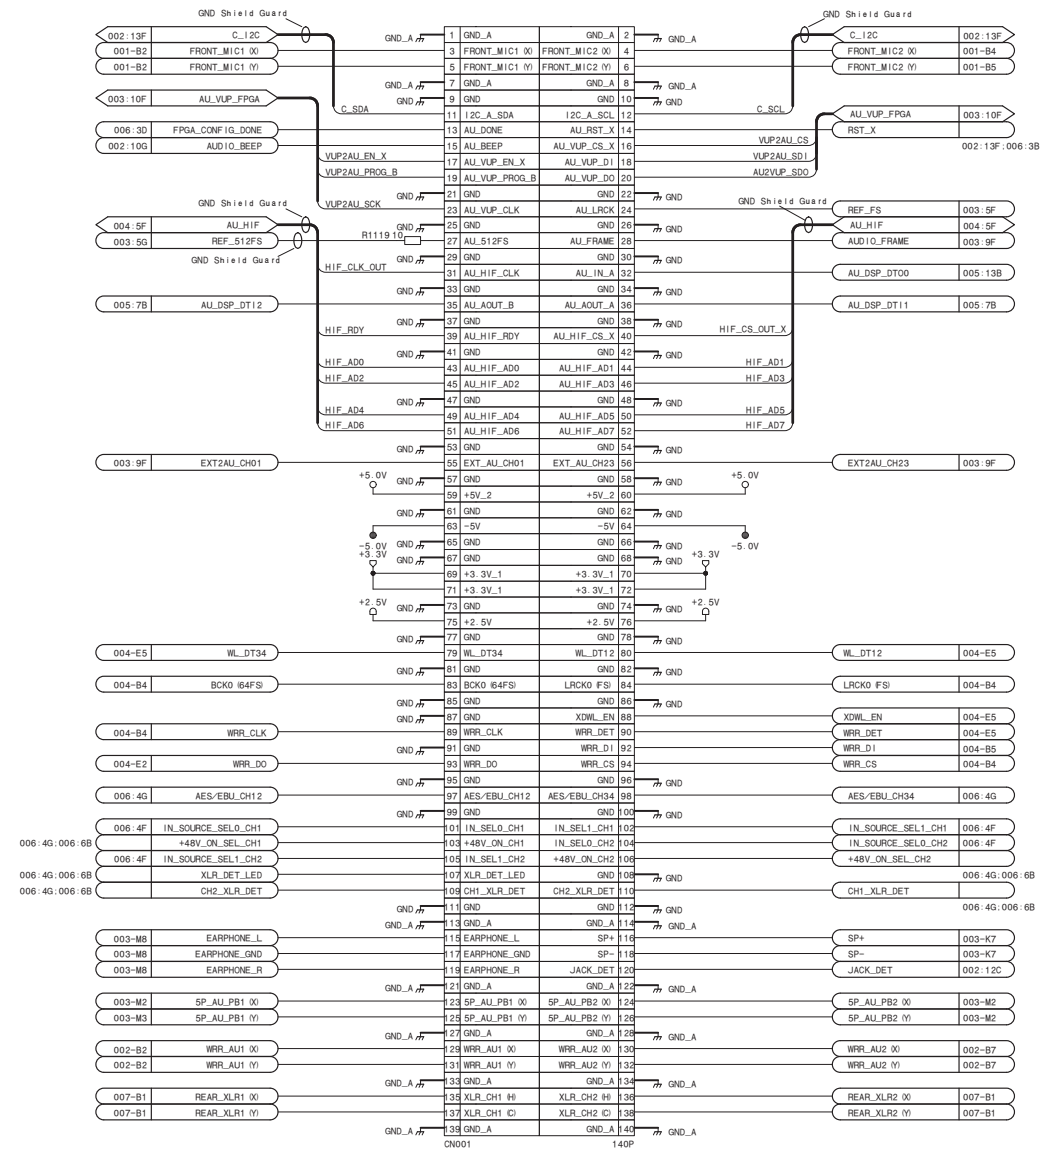


Connector/Power
AU-360 (9/9)
BOARD NO. 1-894-109-11
AU-360_9

AXM-52

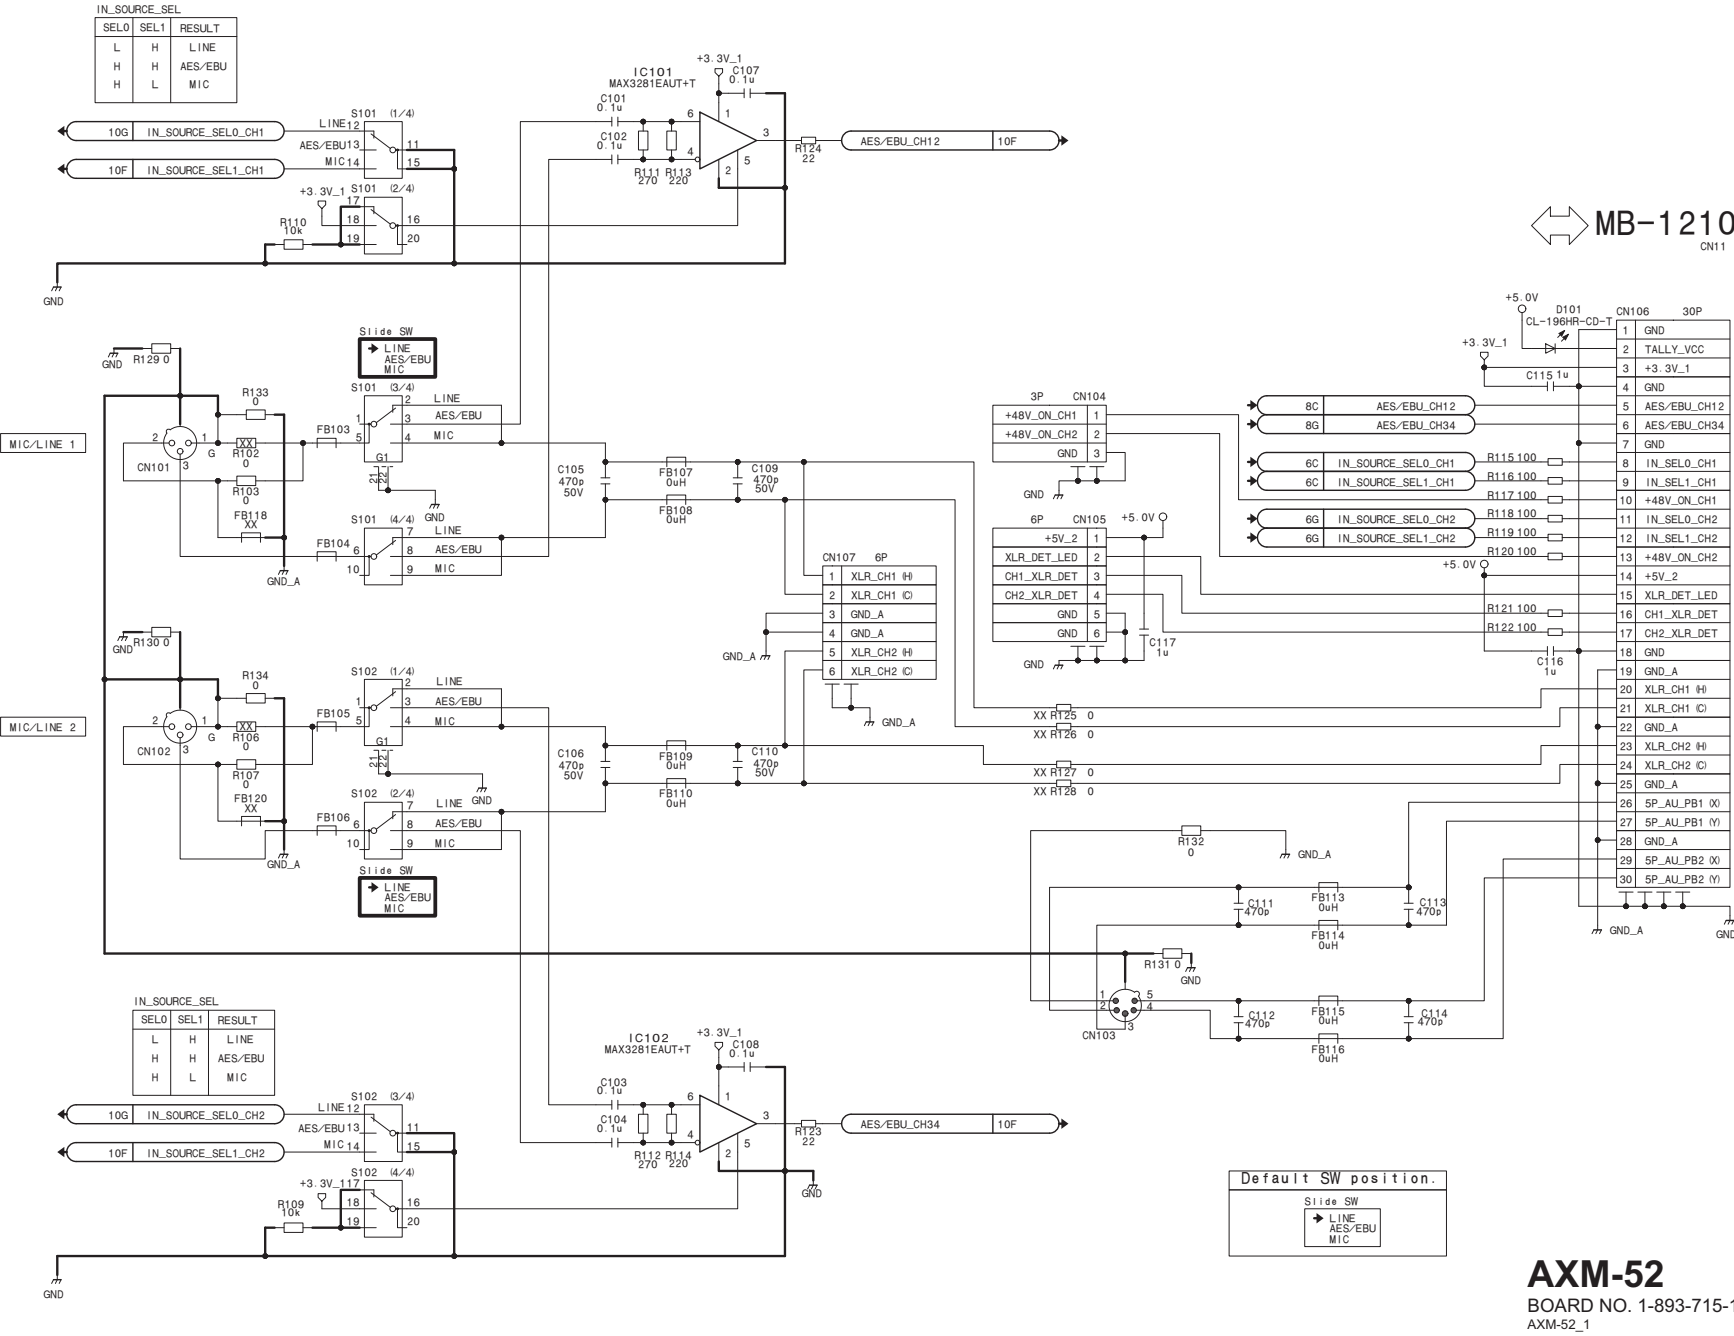

To HPR-53

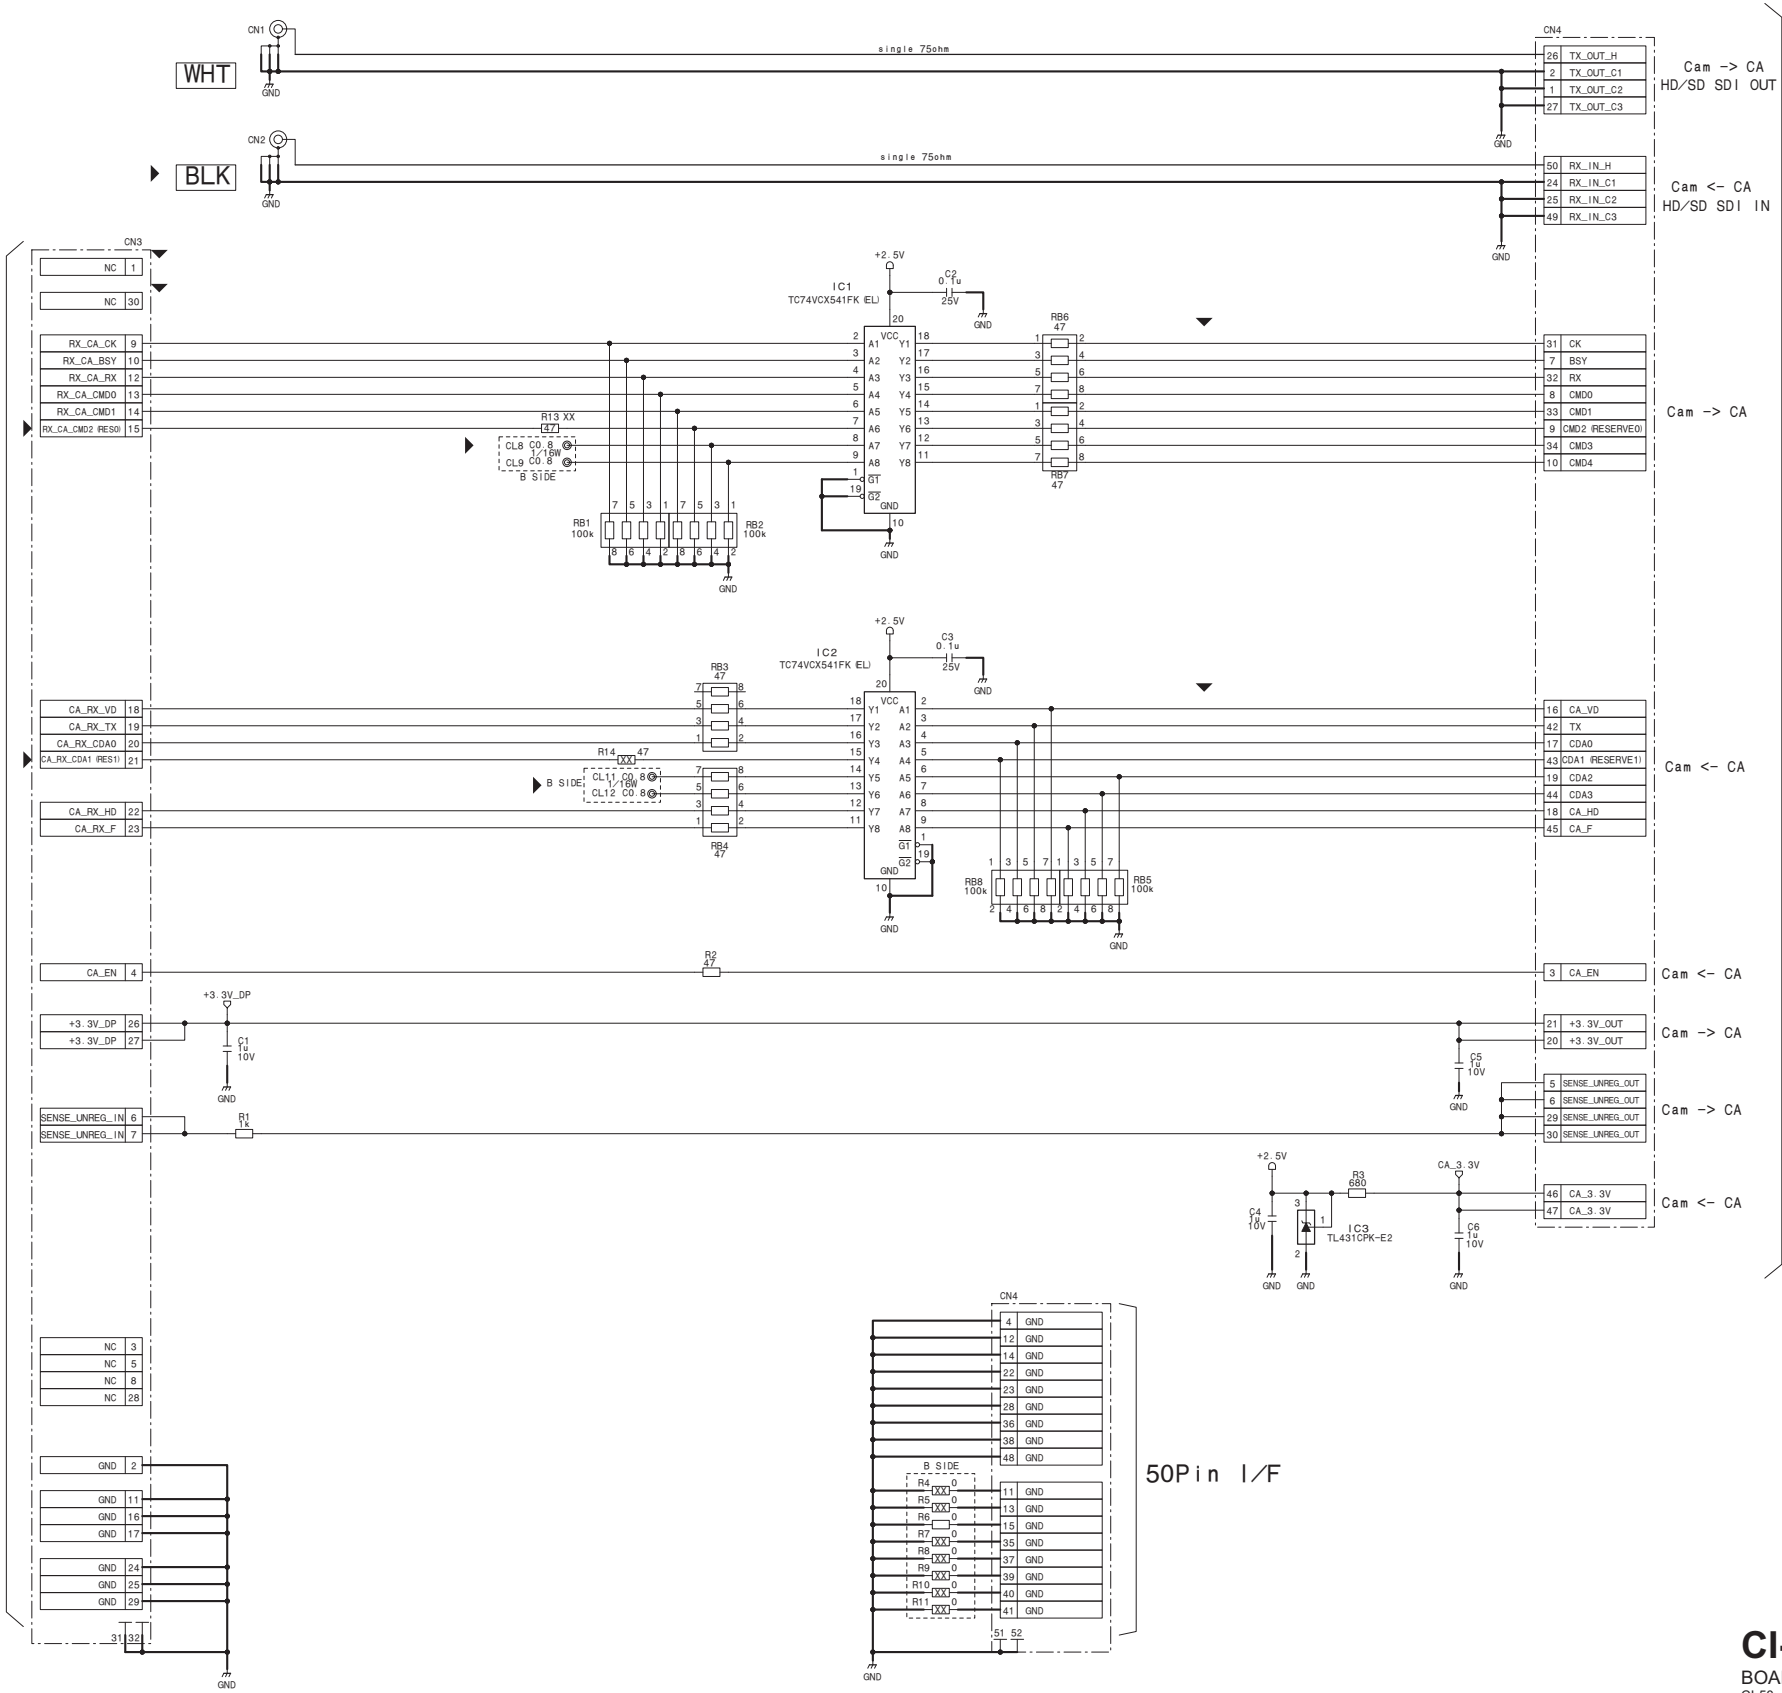

50Pin I/F

CI-50
BOARD NO. 1-894-113-11
CI-50_1

W. M. (CN12) <-




CN-3723
BOARD NO. 1-893-779-11
CN-3723_1

CN-3736
BOARD NO. 1-893-718-11
CN-3736_1







CN-3737
BOARD NO. 1-893-708-11
CN-3737_1

CN-3738

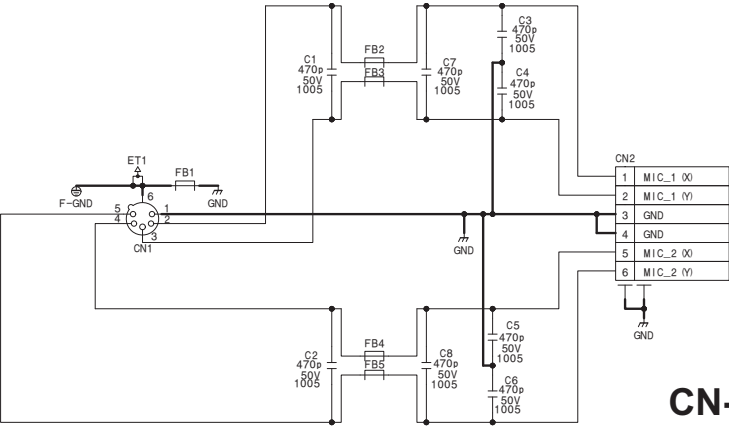



CN-3738
BOARD NO. 1-893-855-12
CN-3738_1

DCP-67 [SUFFIX:-11, -12]
DCP-67 (1/7)

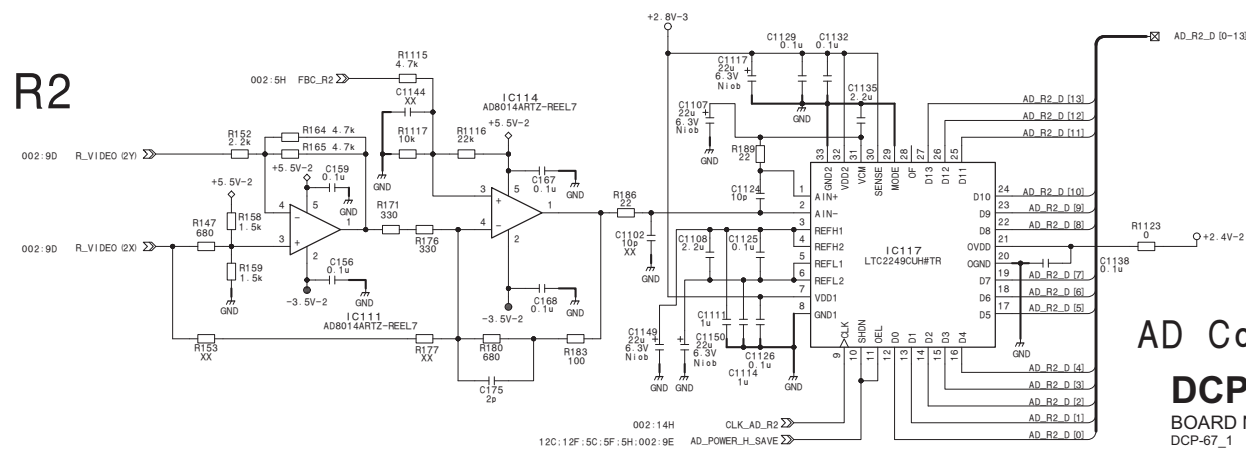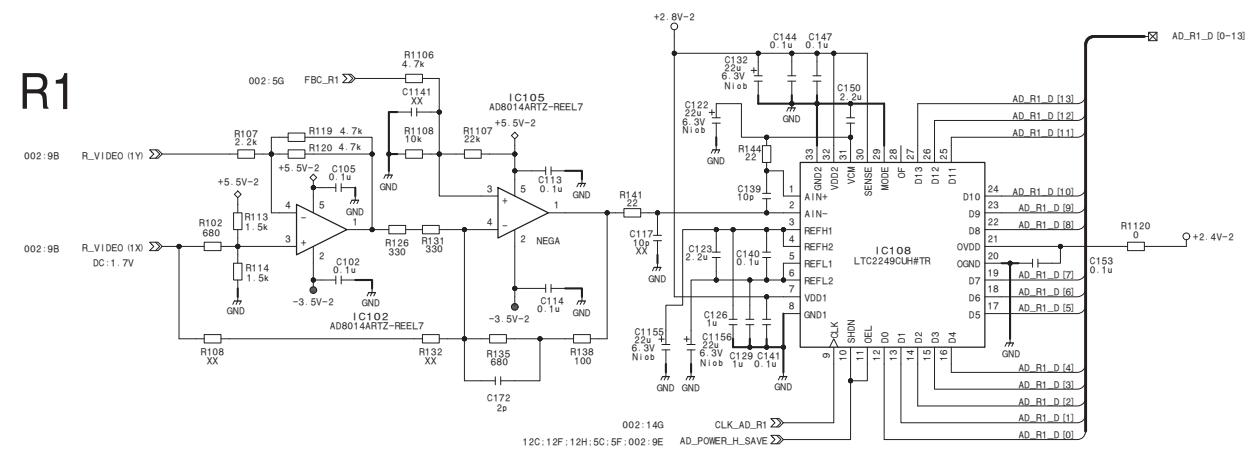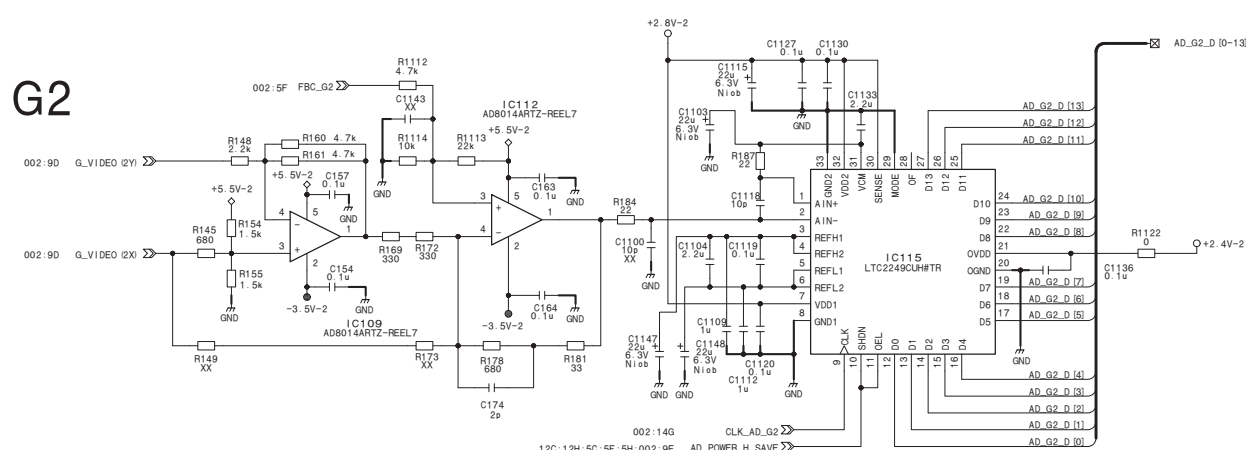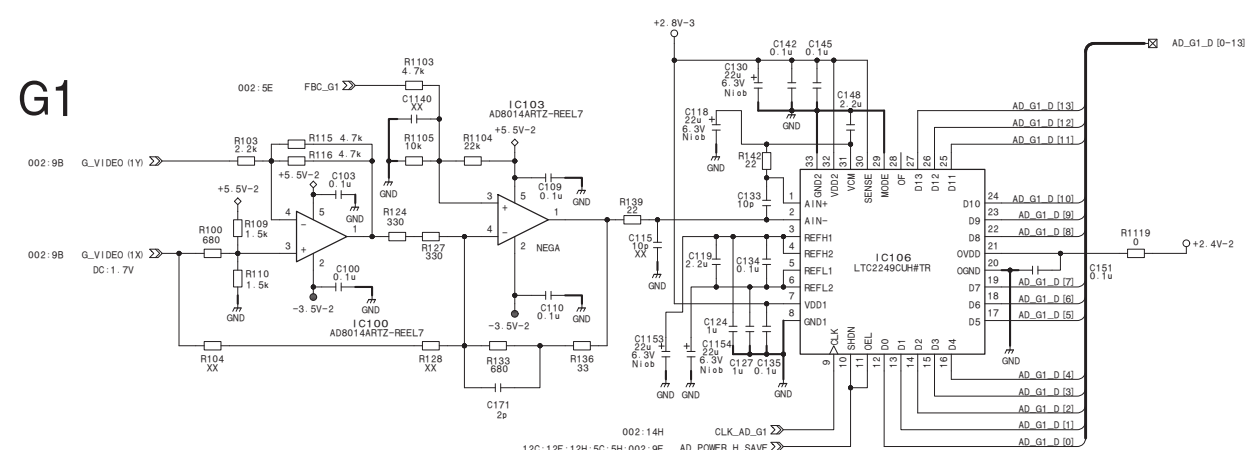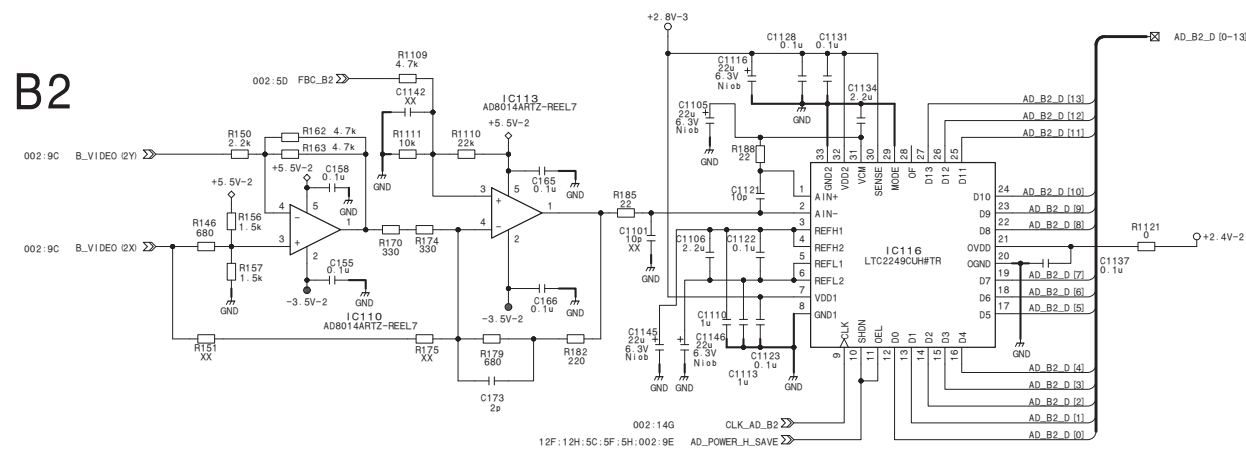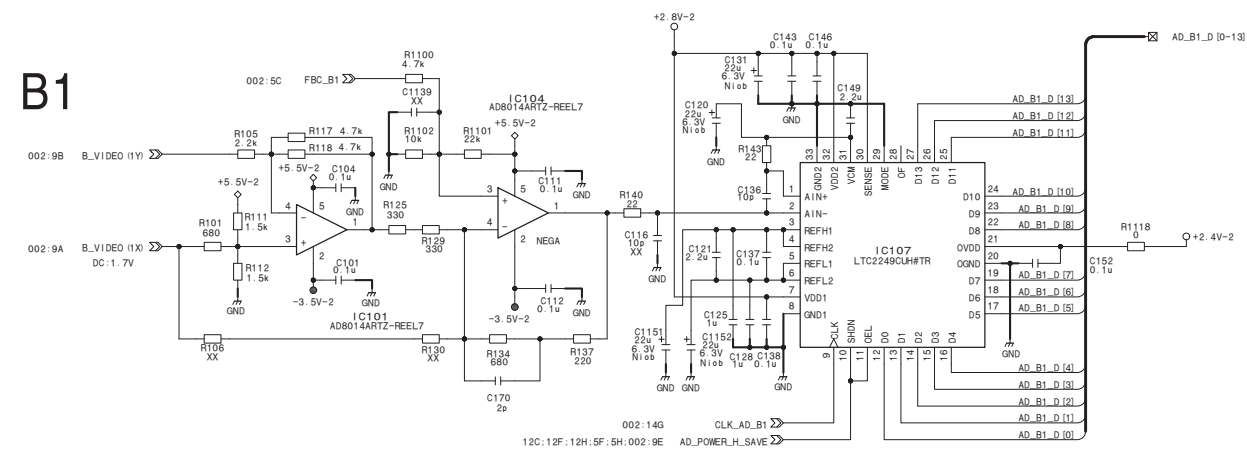


AD Converter
DCP-67 (1/7)
 BOARD NO. 1-894-115-11, 12
 DCP-67_1

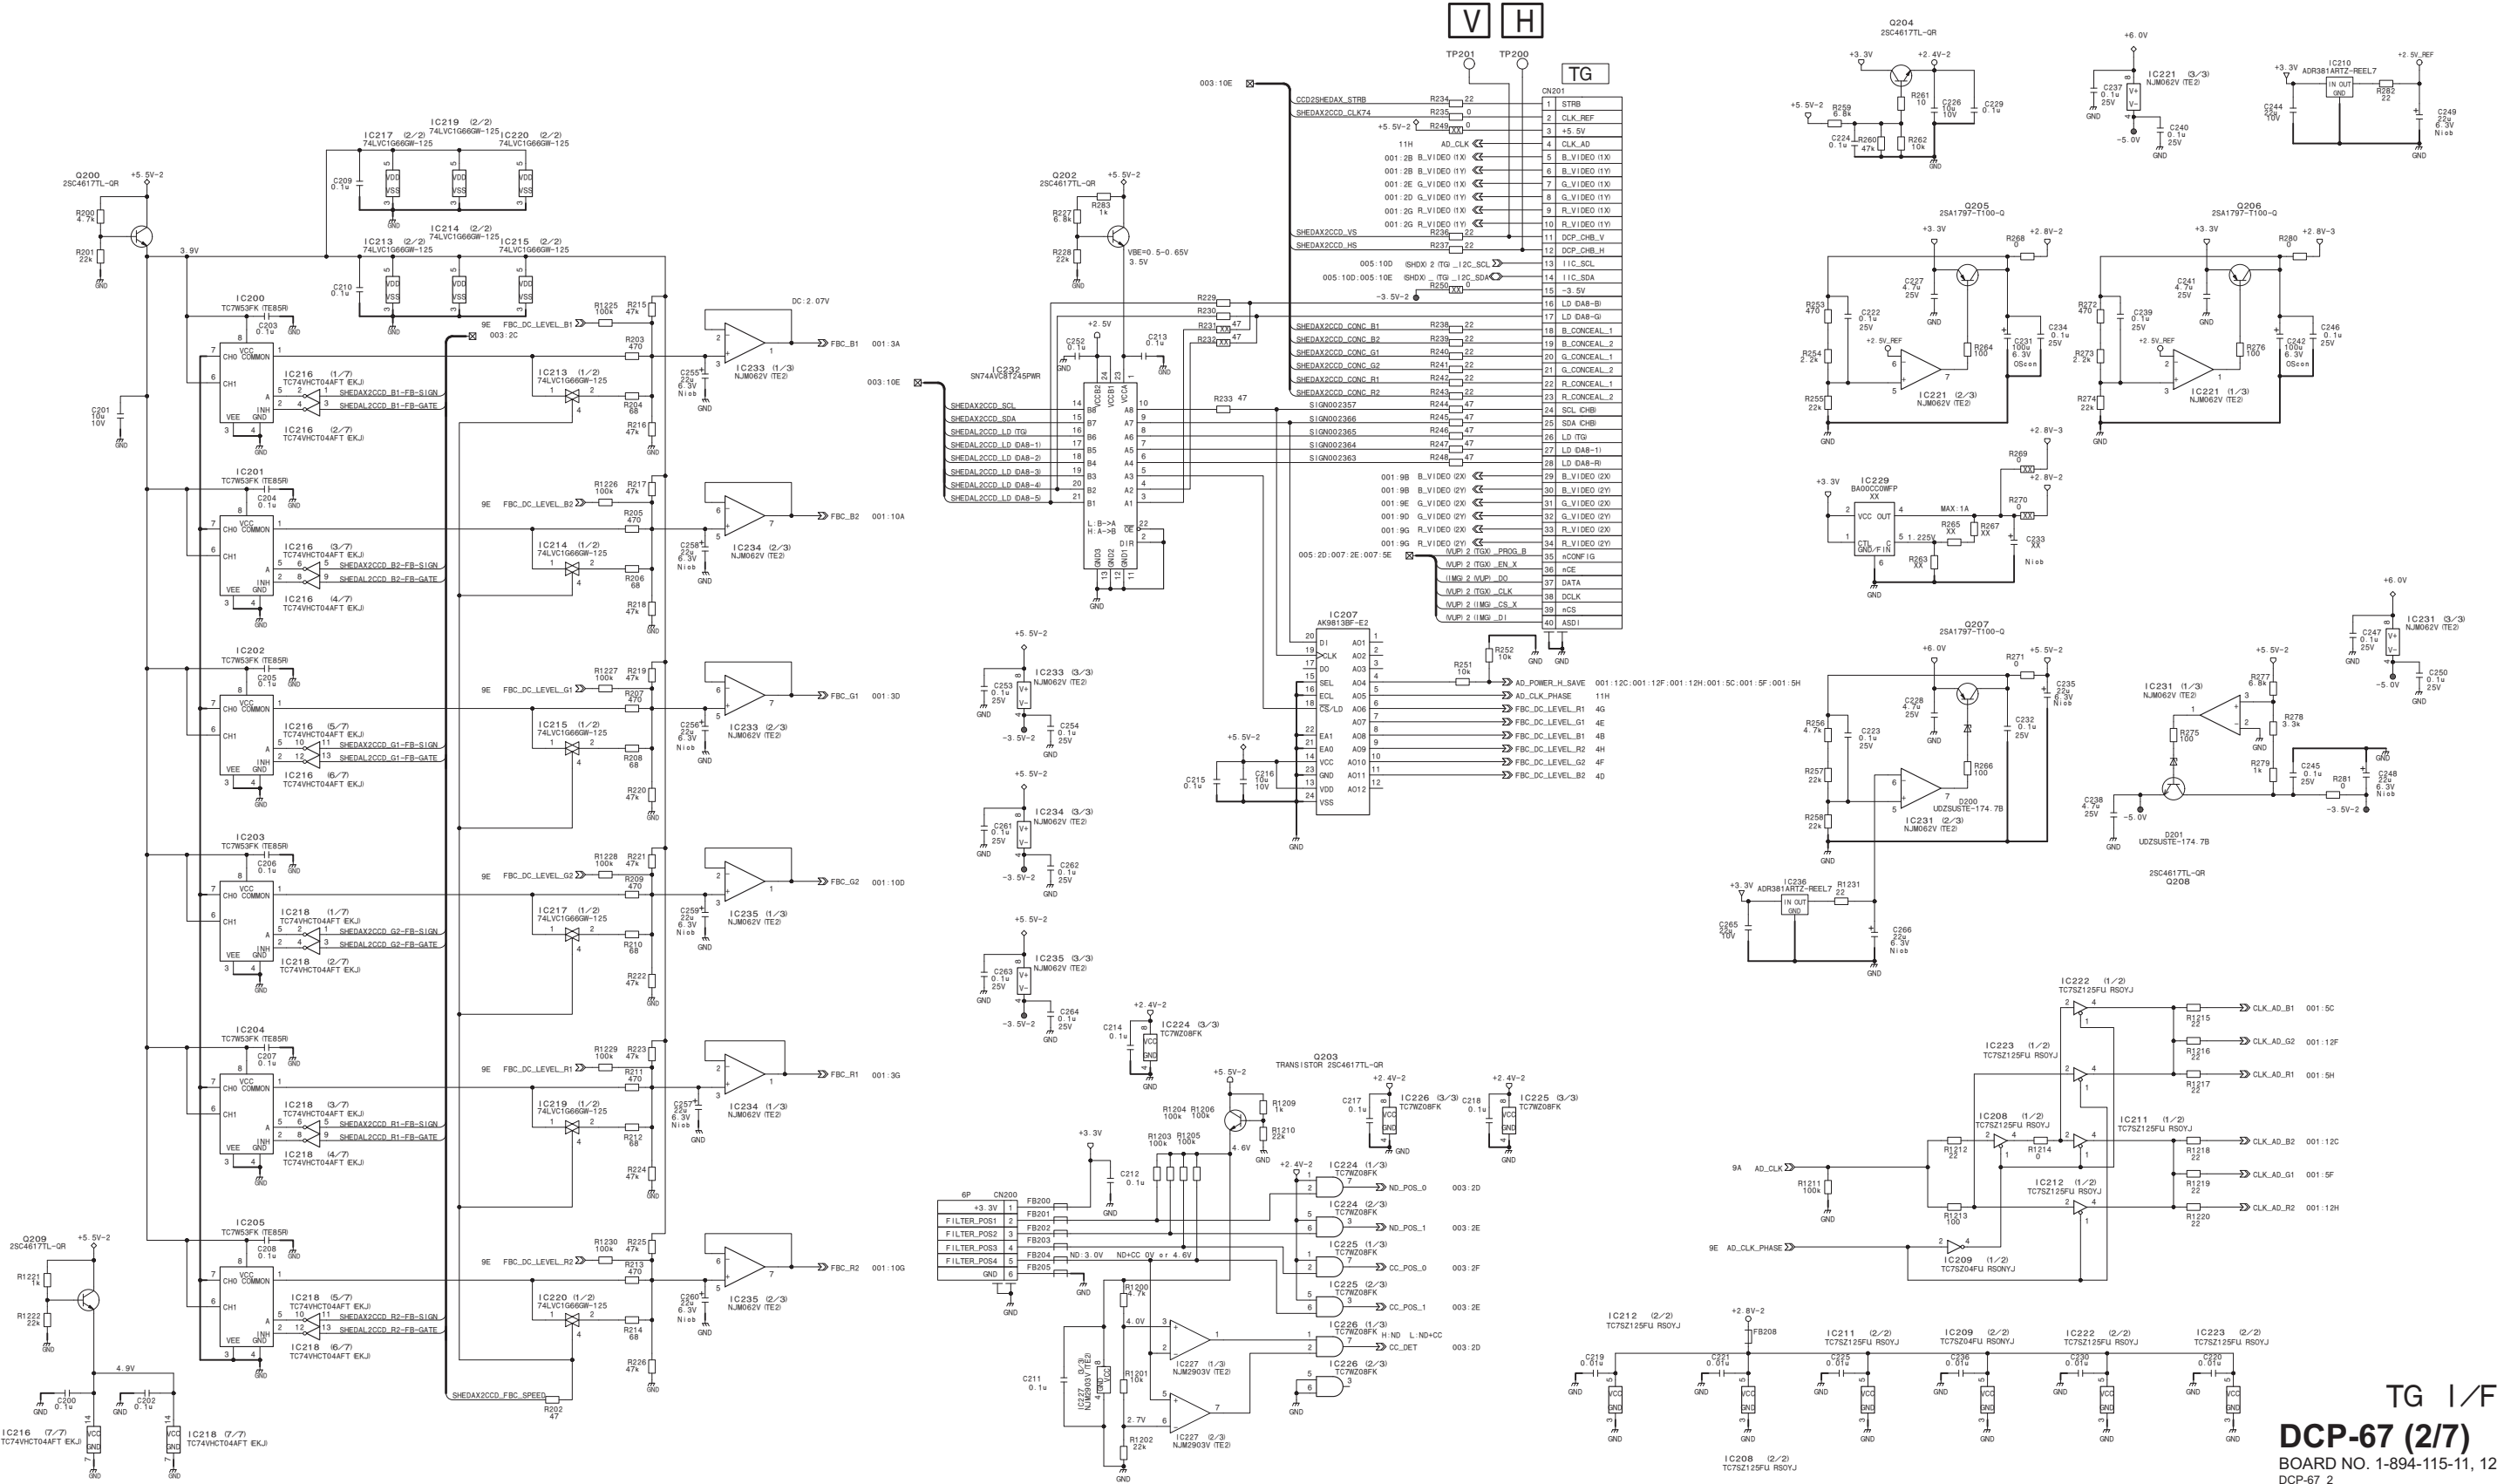


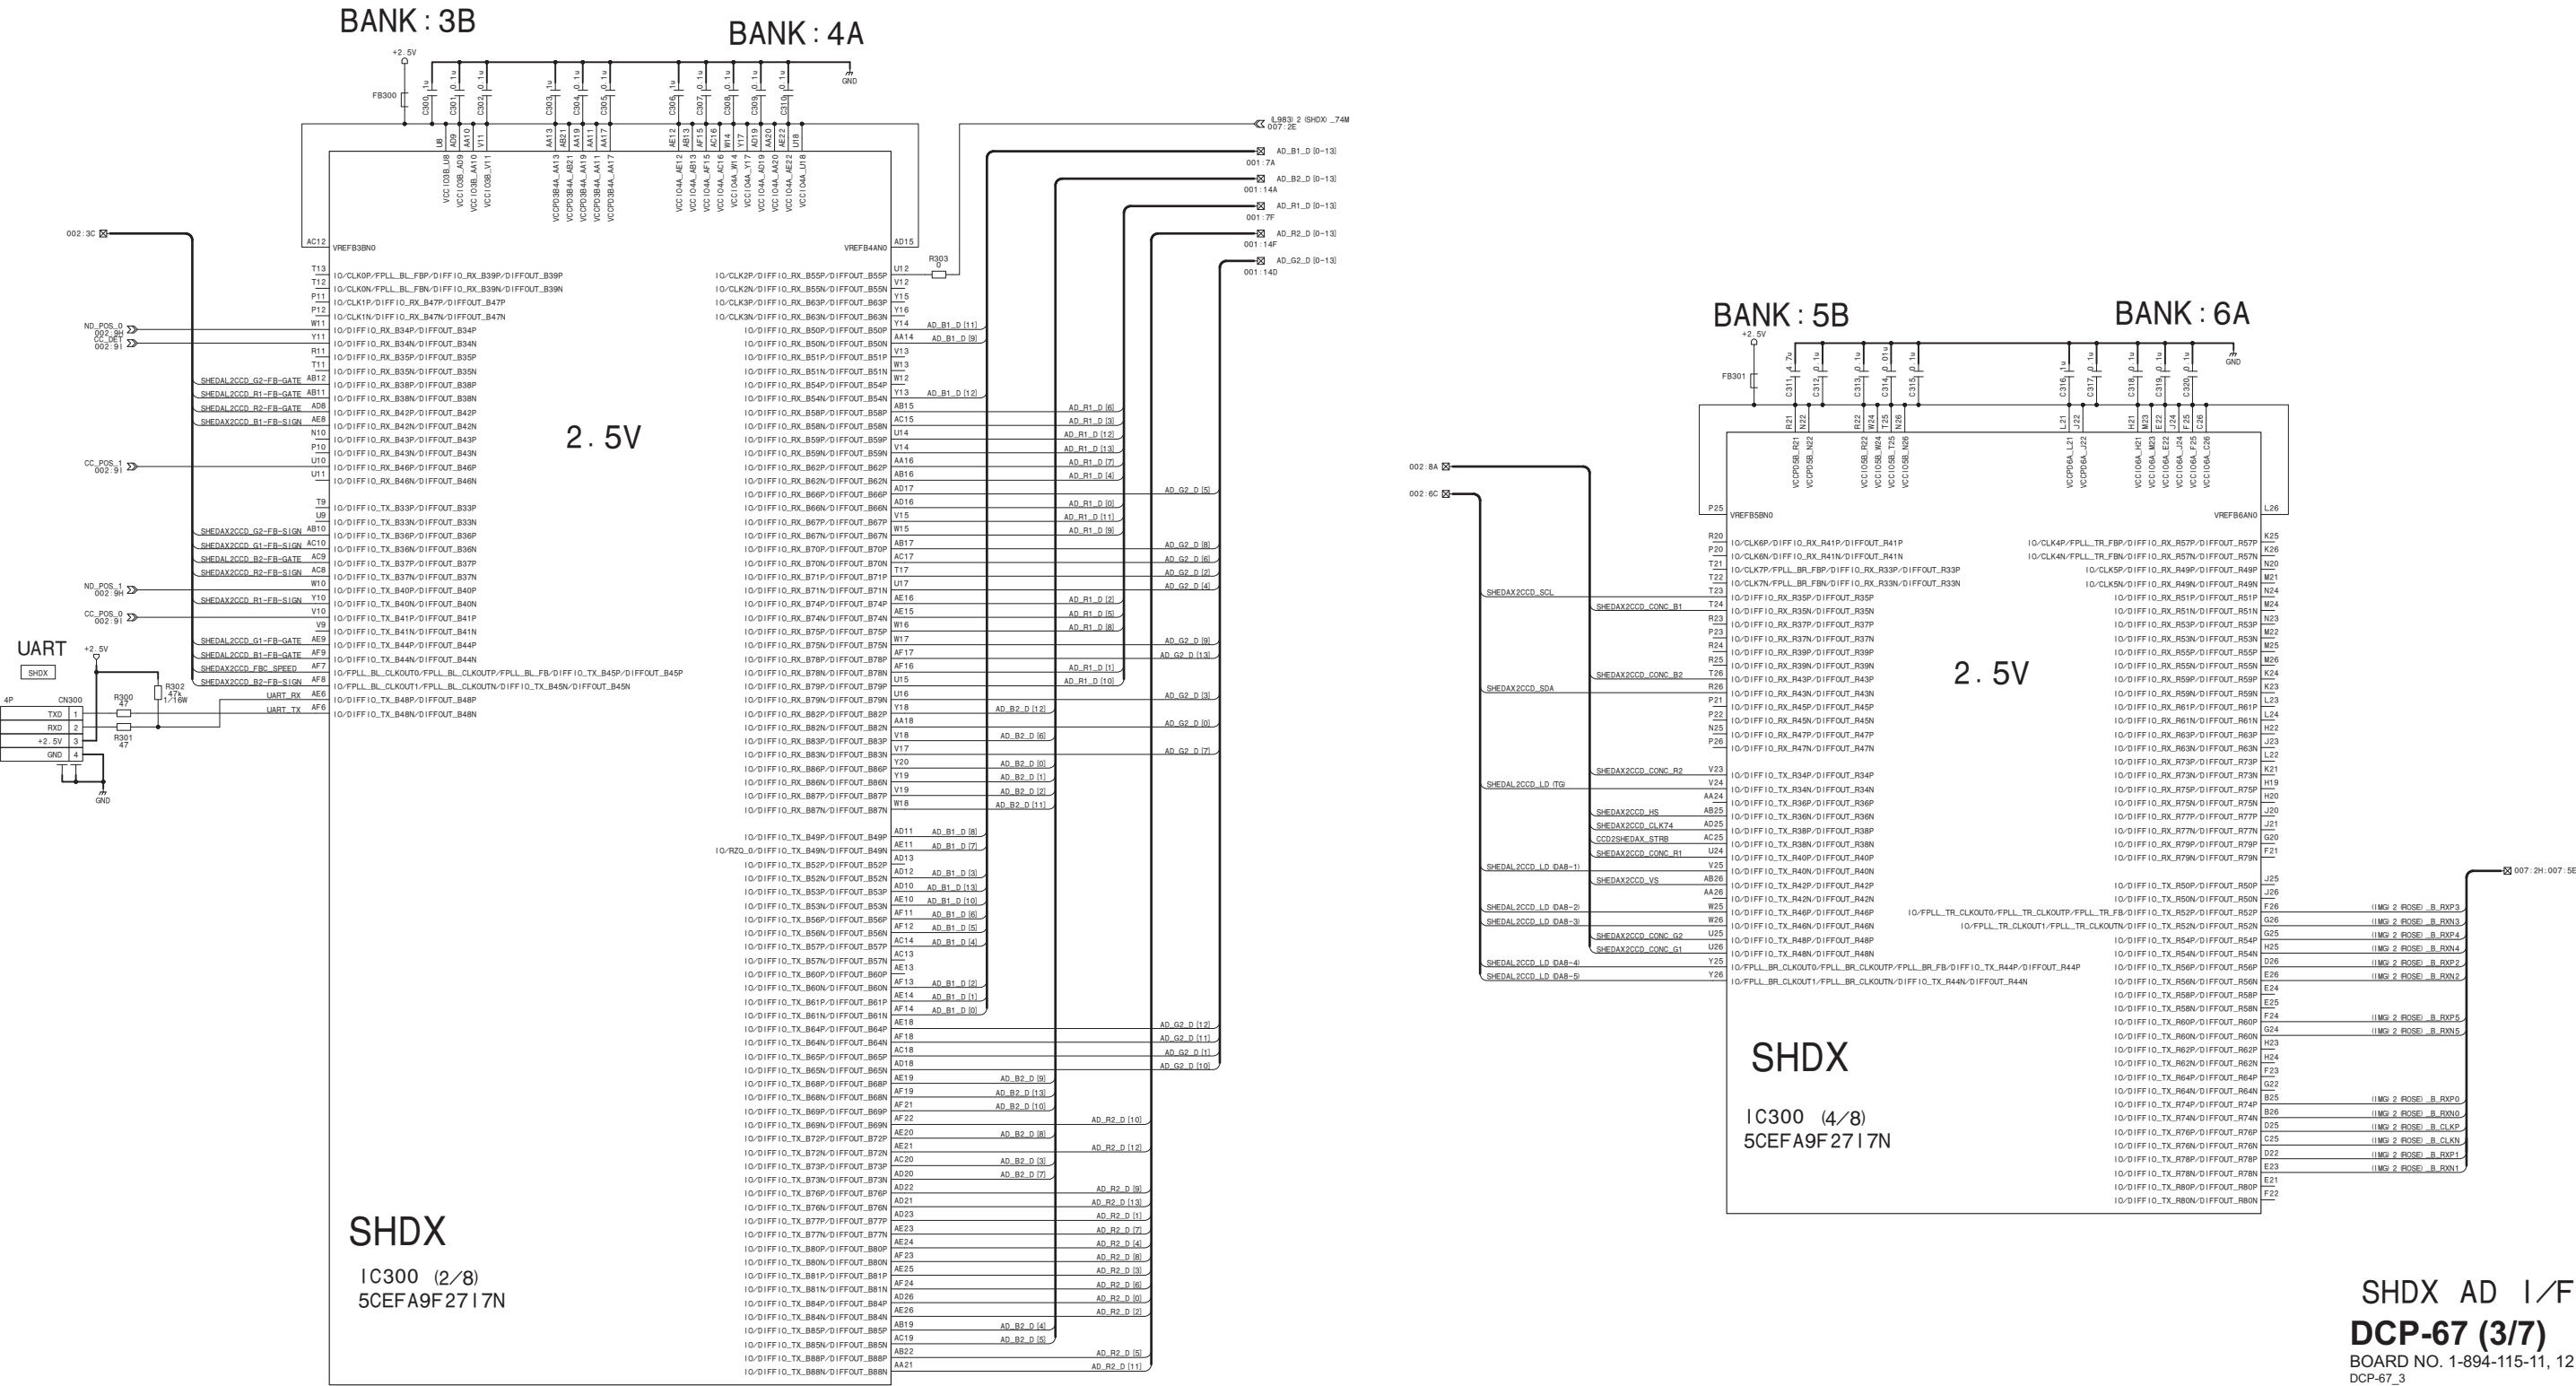




DCP-67 (4/7)

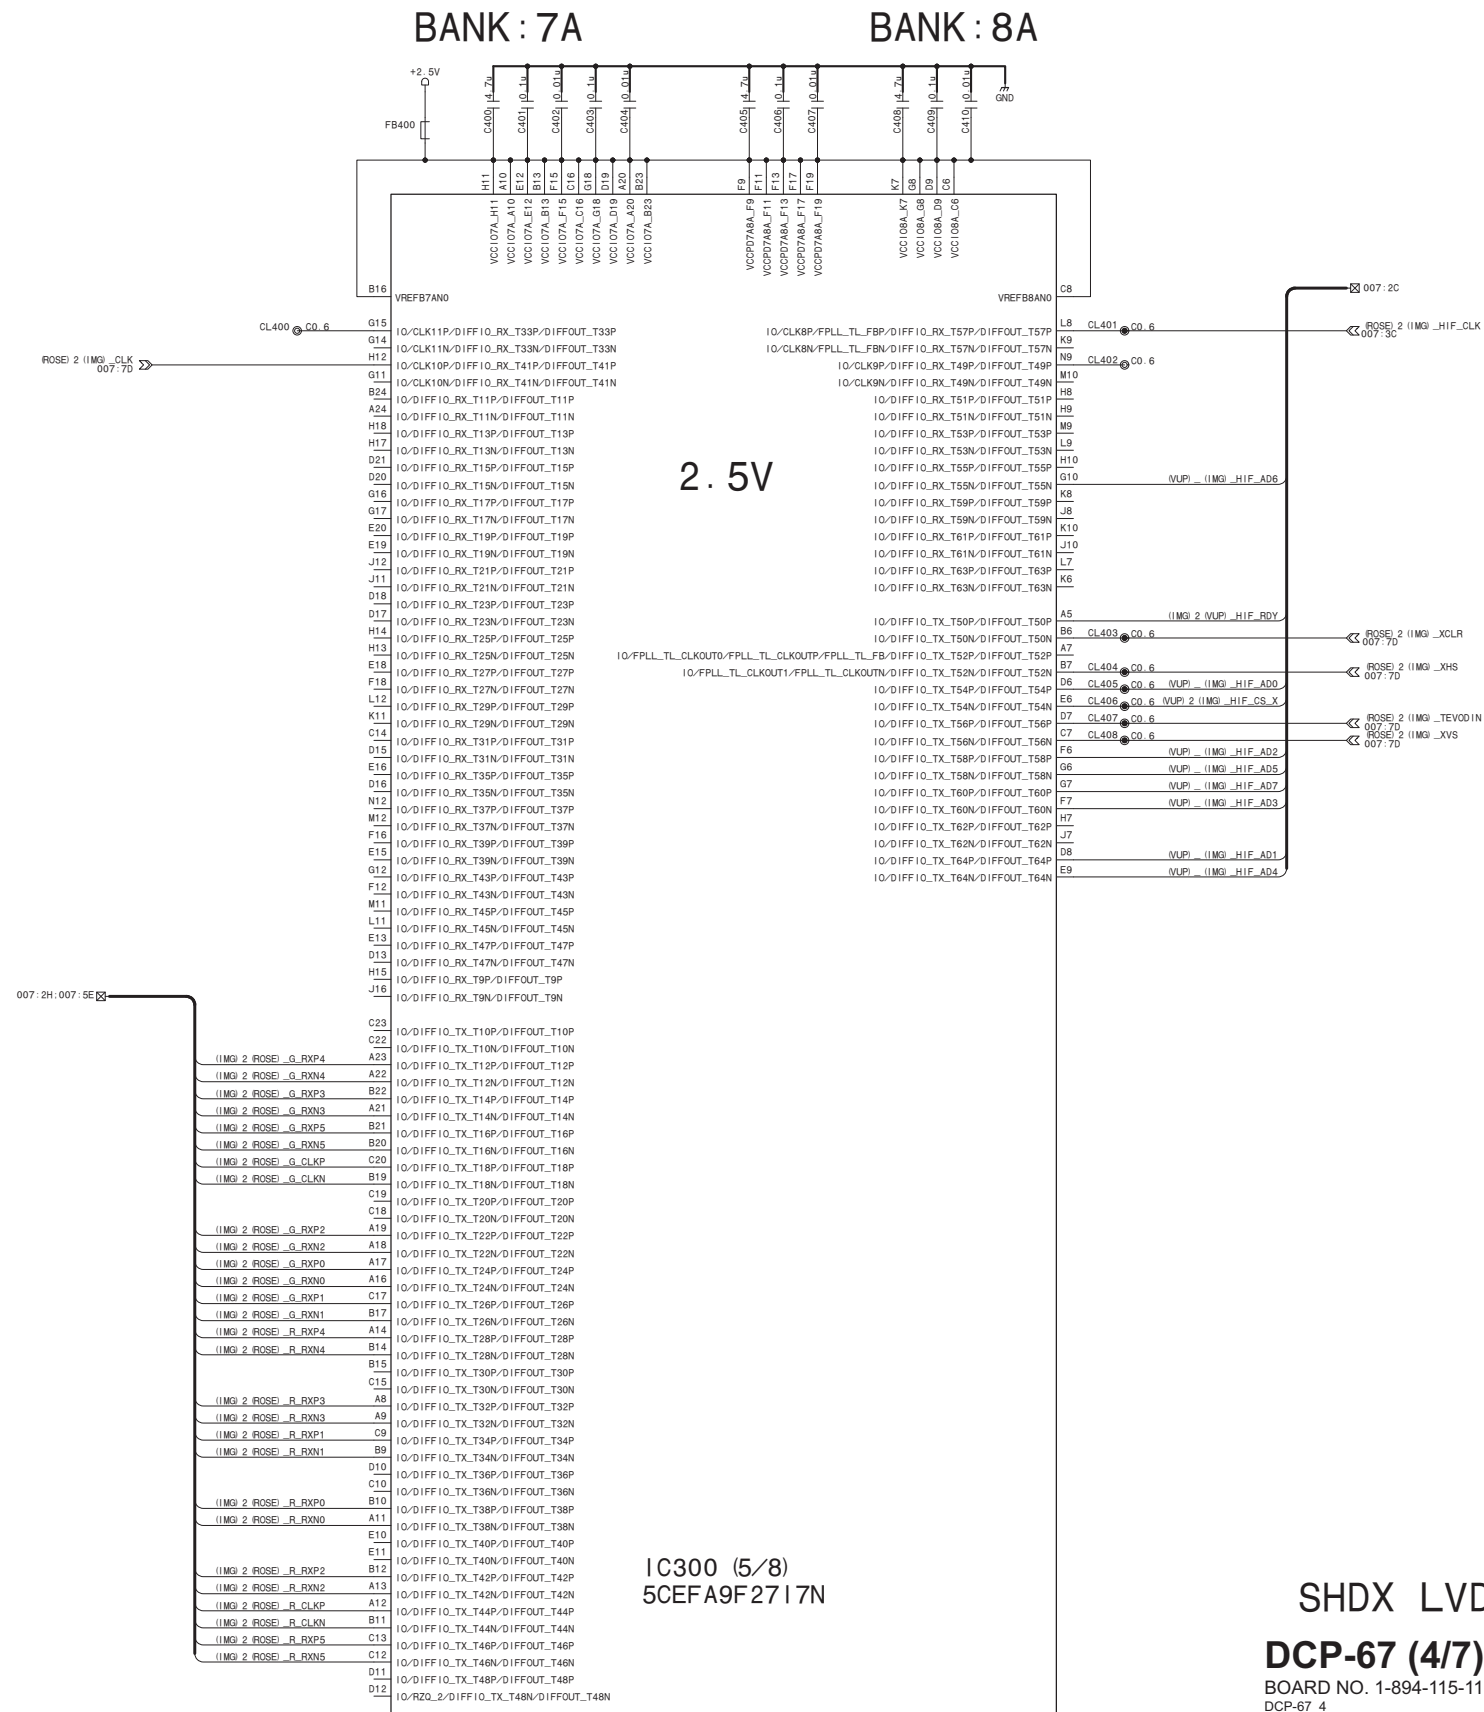


SHDX Config
BANK:3A



DCP-67 (6/7)

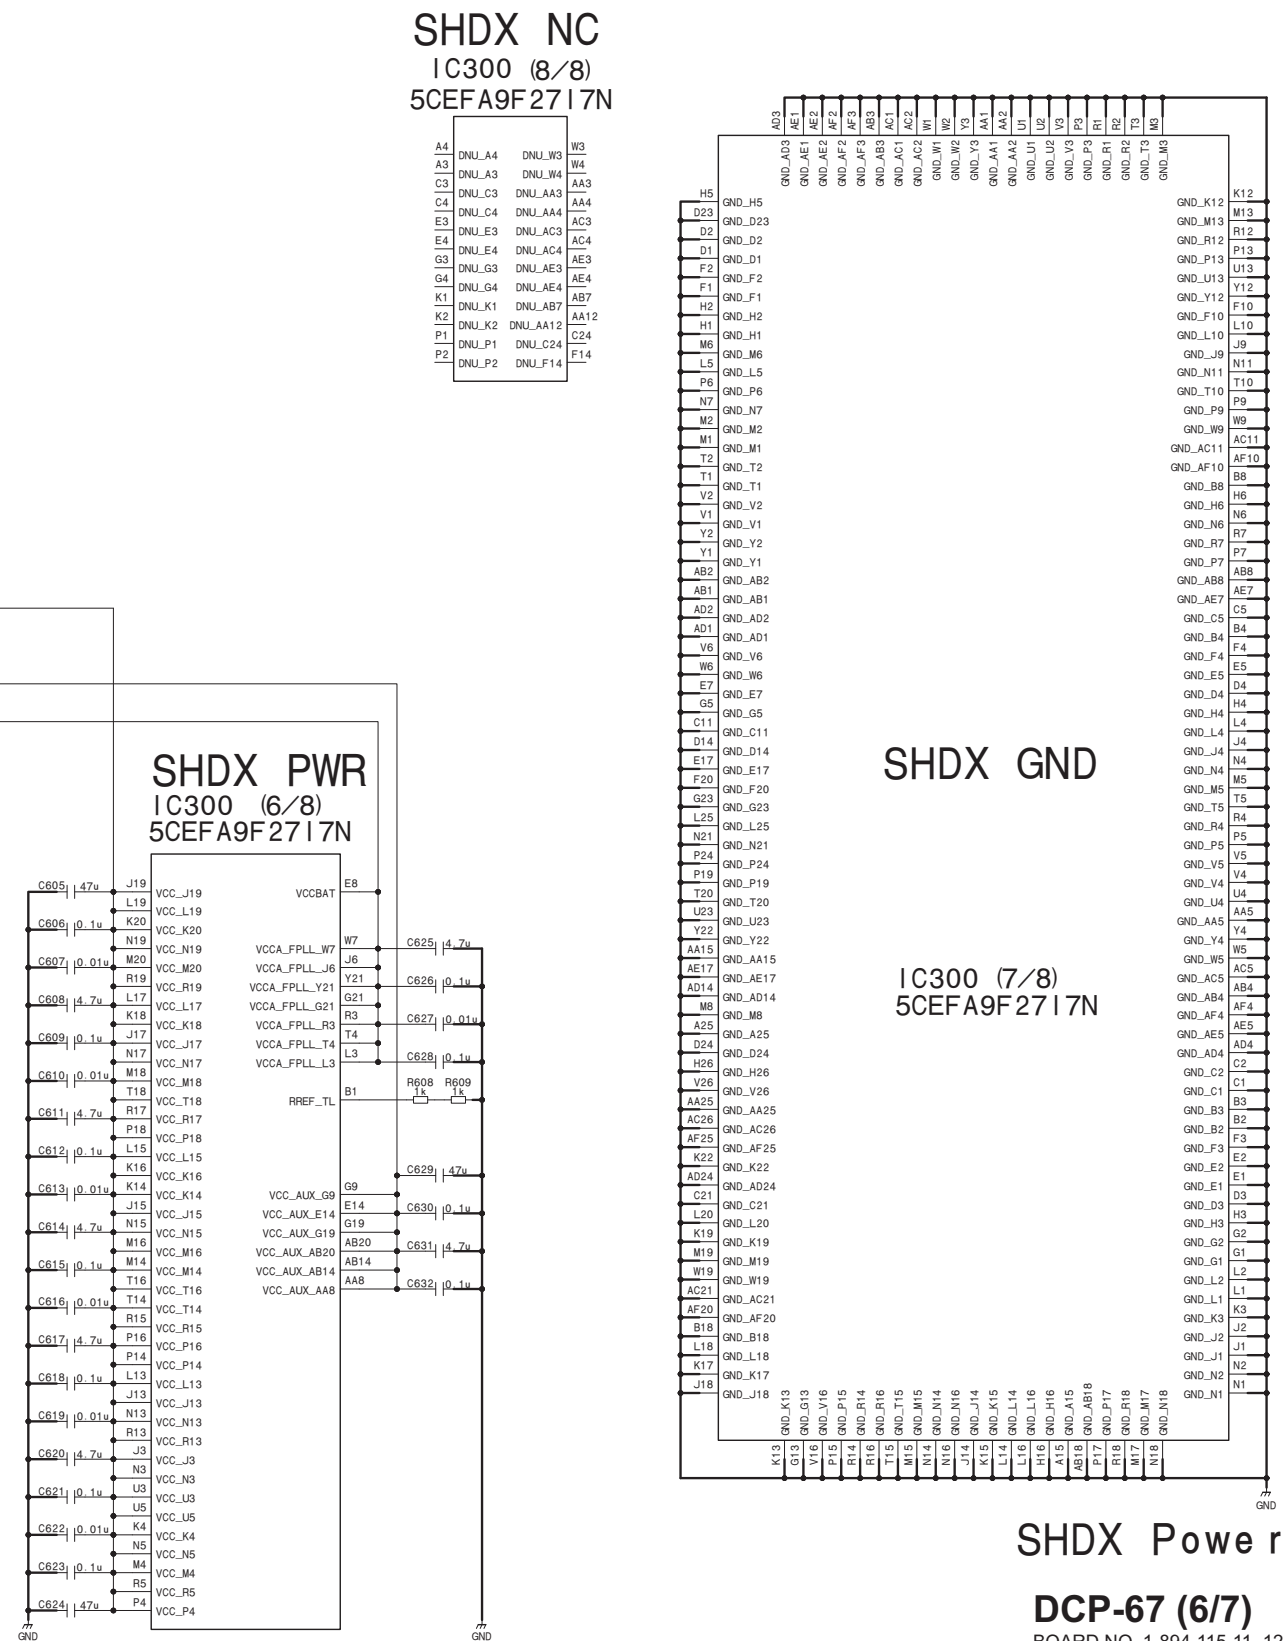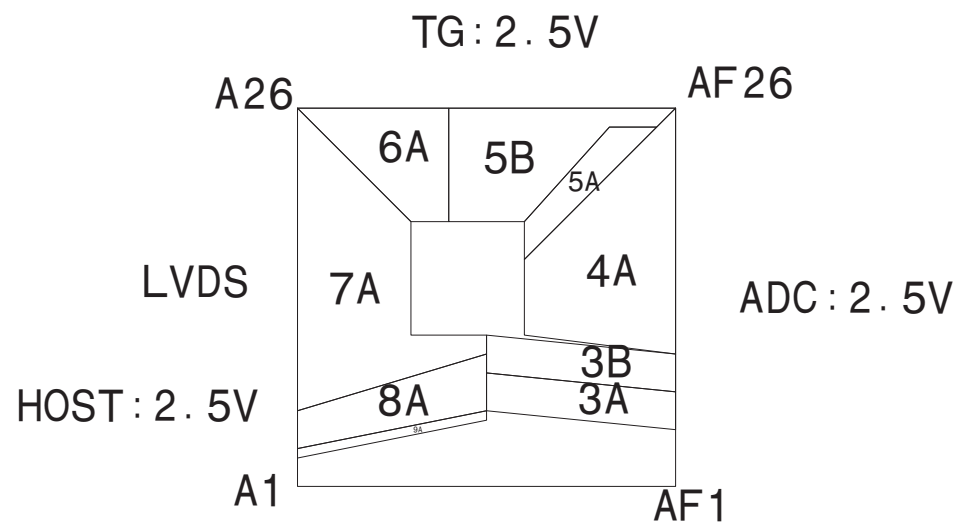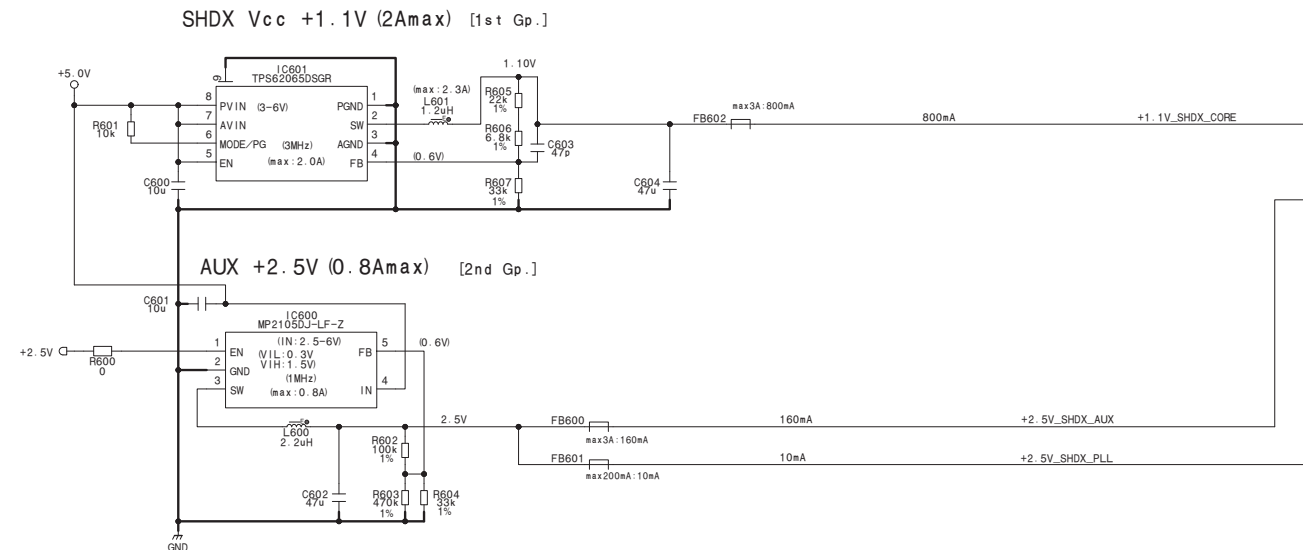

DCP-67 (7/7)

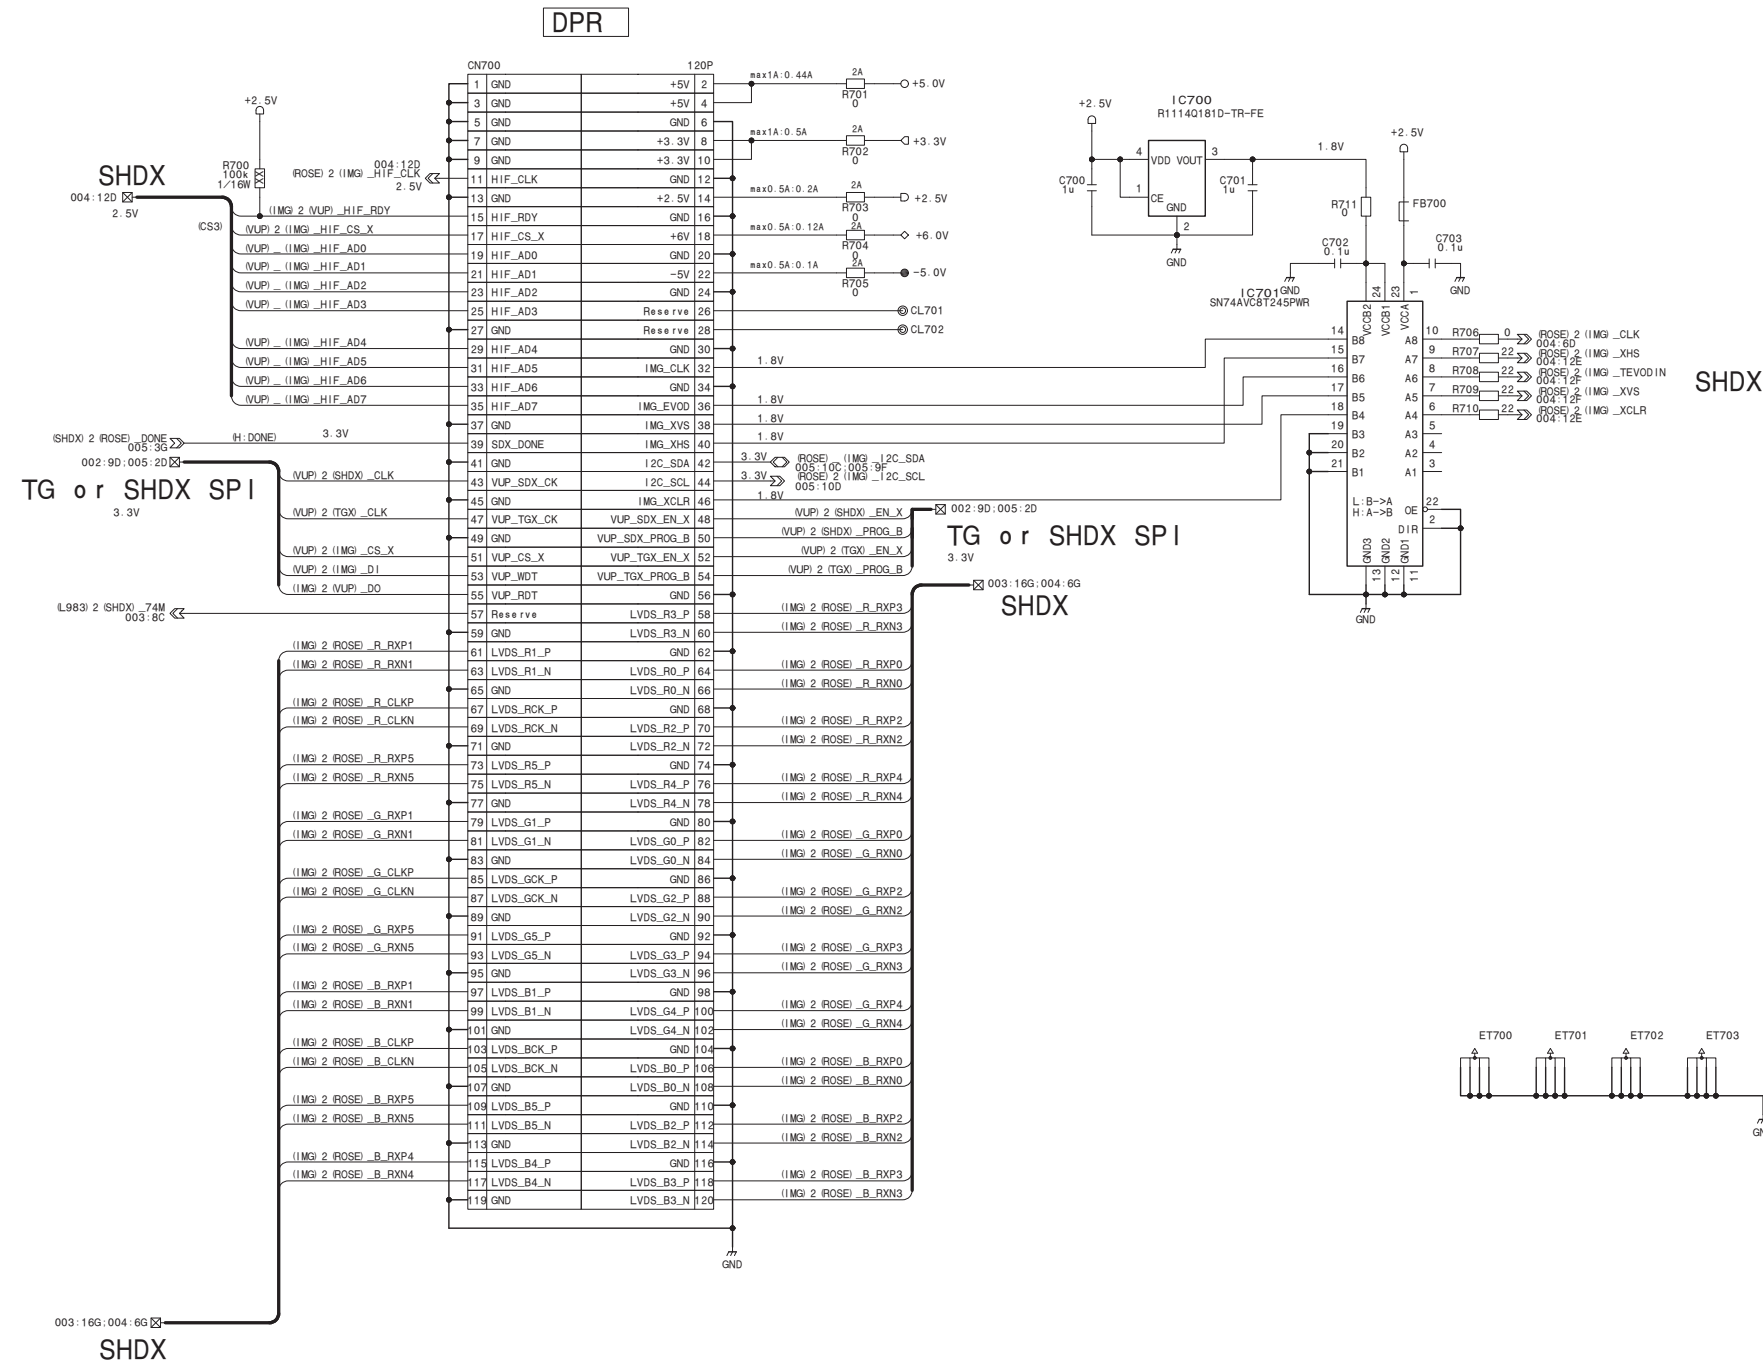


DPR 1/F

DCP-67 (7/7)
BOARD NO. 1-894-115-11, 12
DCP-67_7

DET-50

PANEL REVERSE

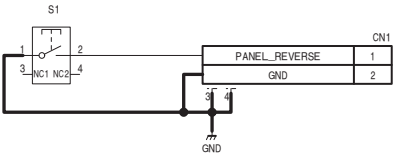

FP

DET-50
BOARD NO. 1-882-919-11
PMW-500_DET-50_110_1

DET-60



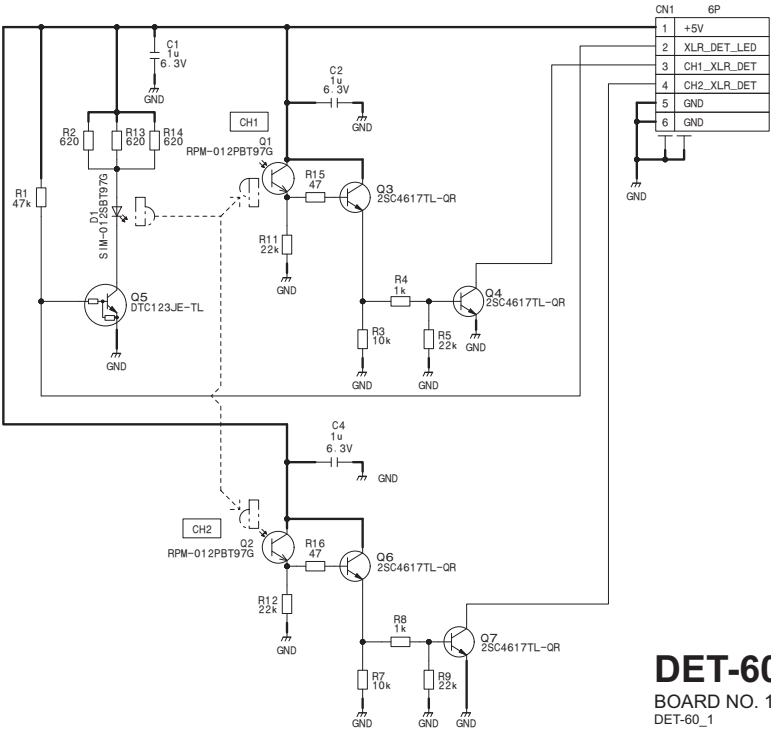





Image rCN

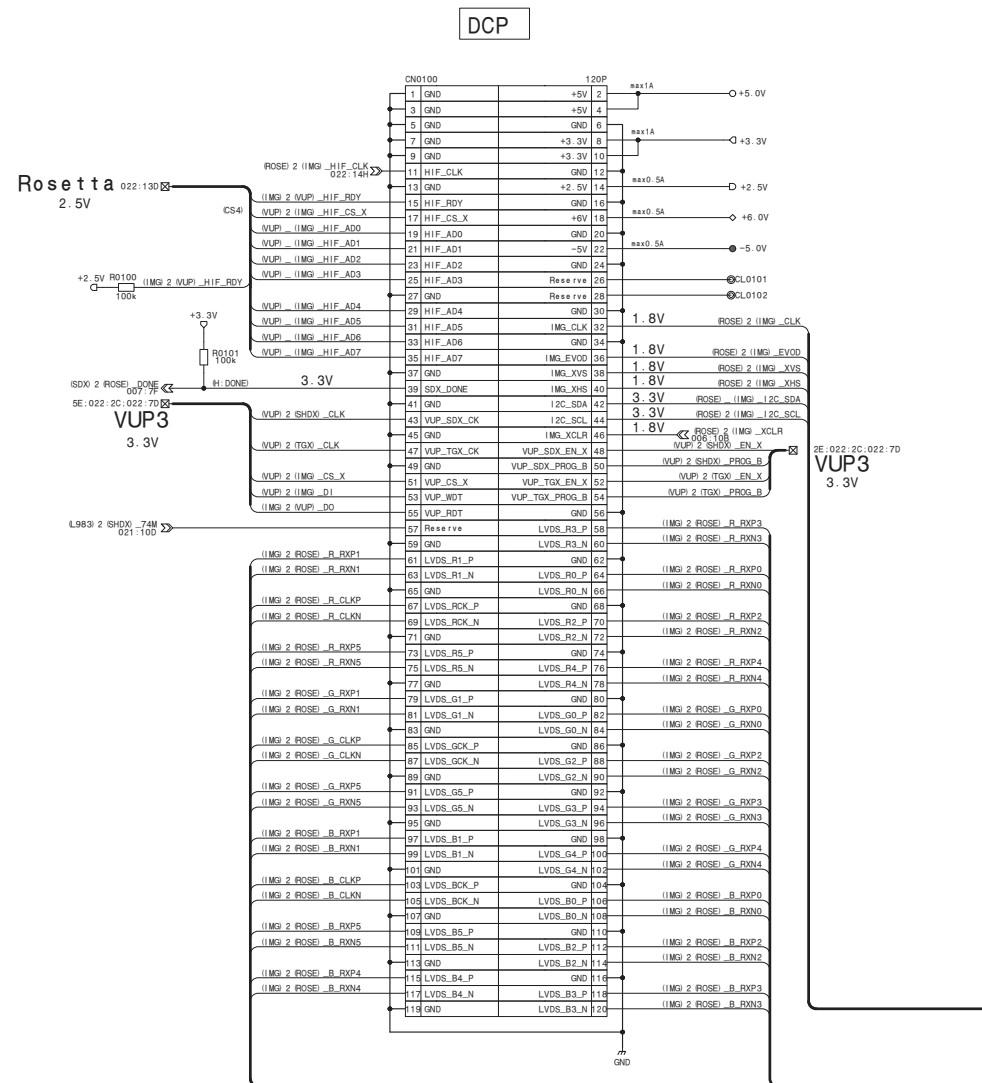

Rosetta
Sub LVDS IN


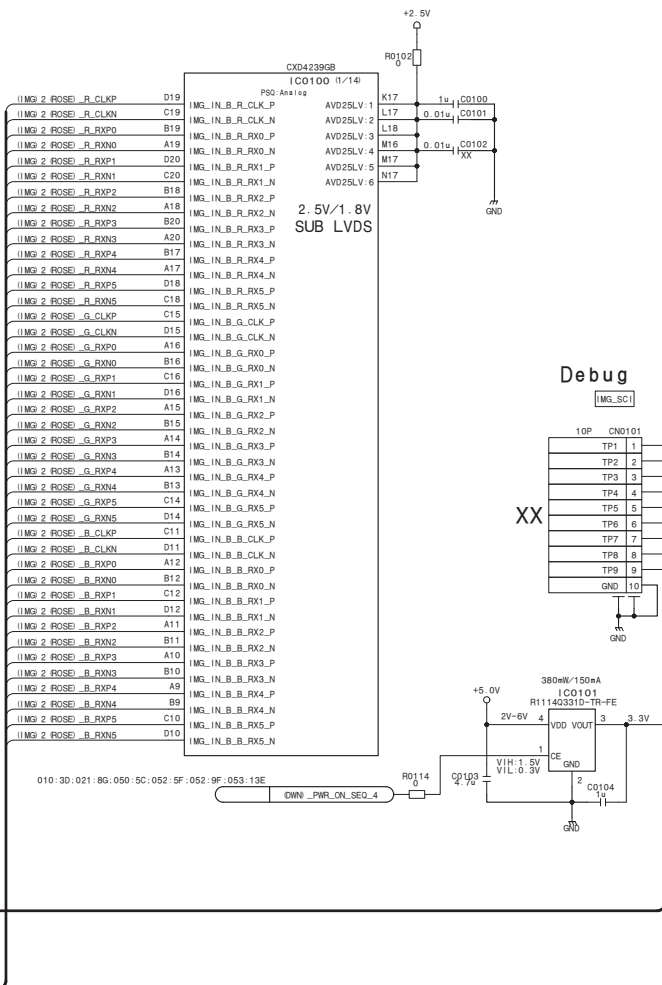



Rosetta
Imager/Lens CTL
UART SIO

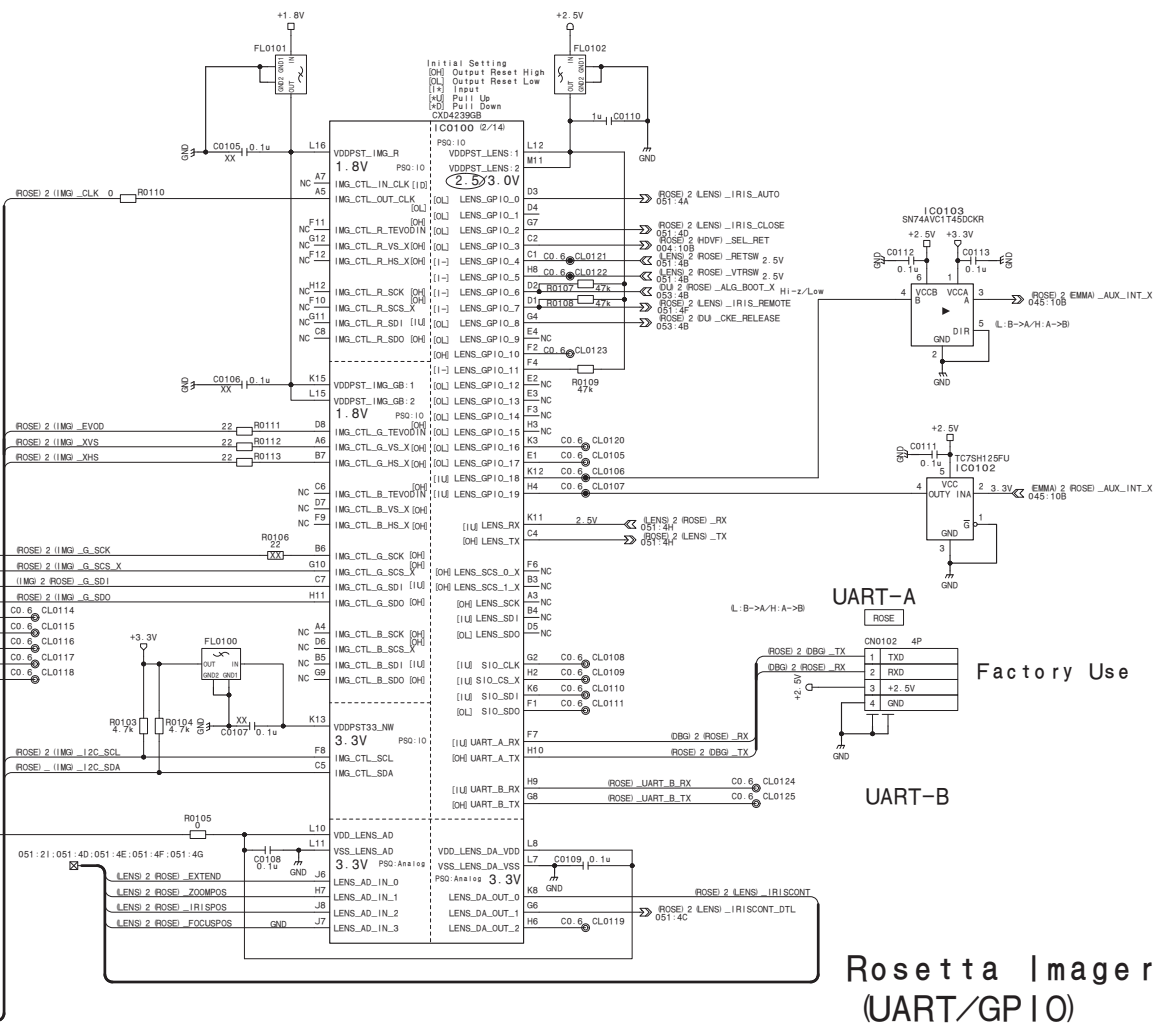Rosetta Imager I/F
(UART/GPIO)


DPR-362 (1/53)
BOARD NO.1-894-128-11, 12
DPR-362_1

DPR-362 (2/53)

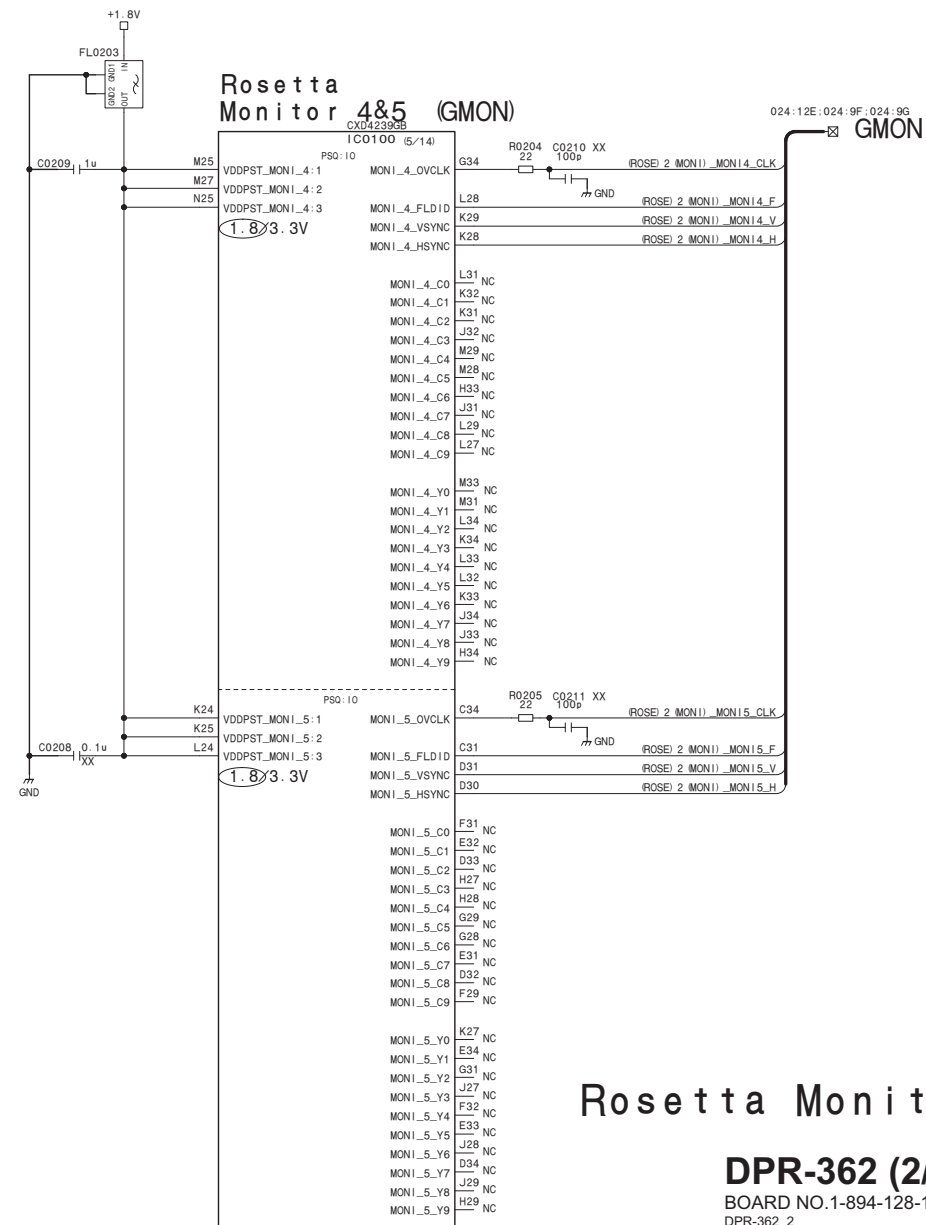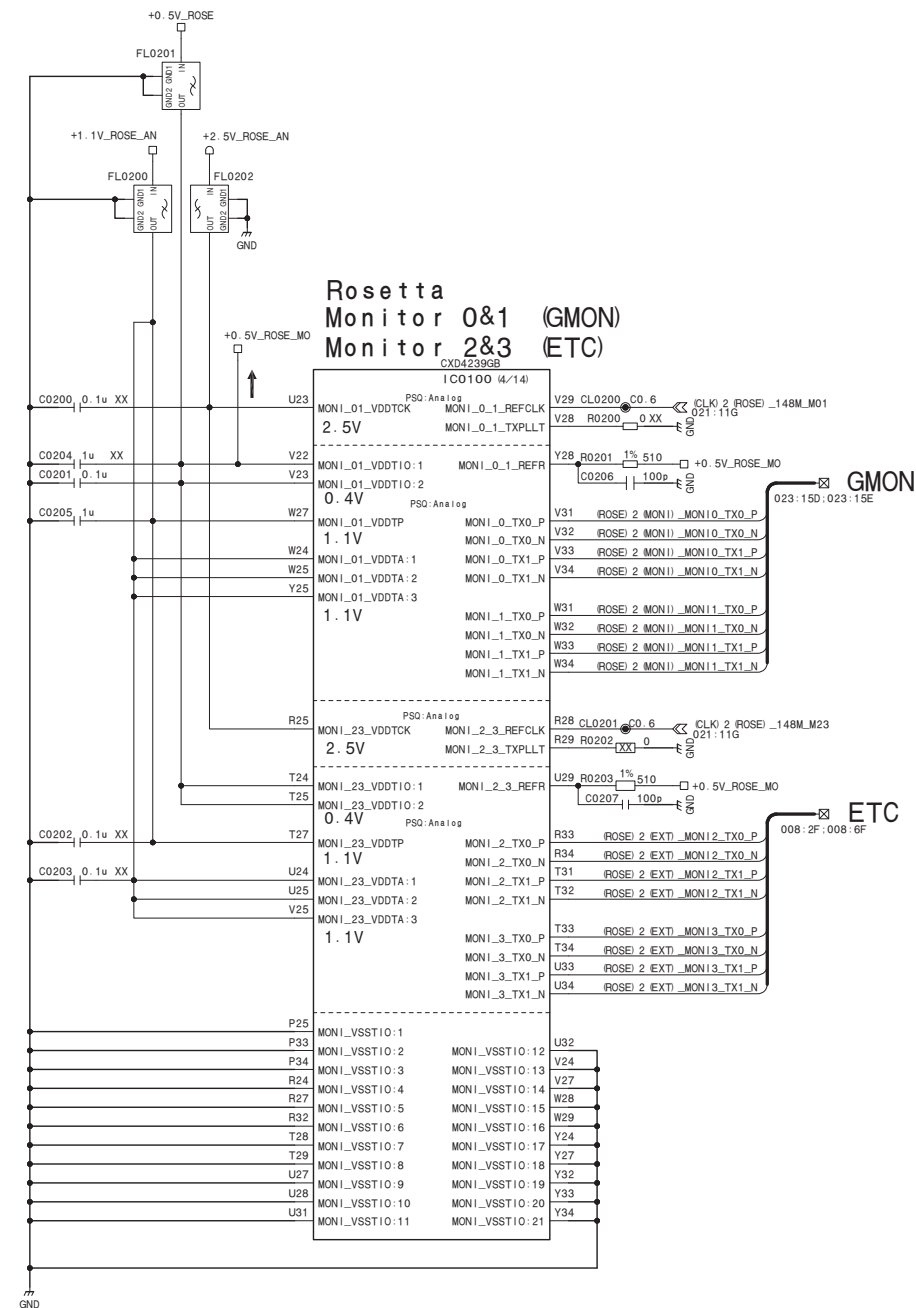

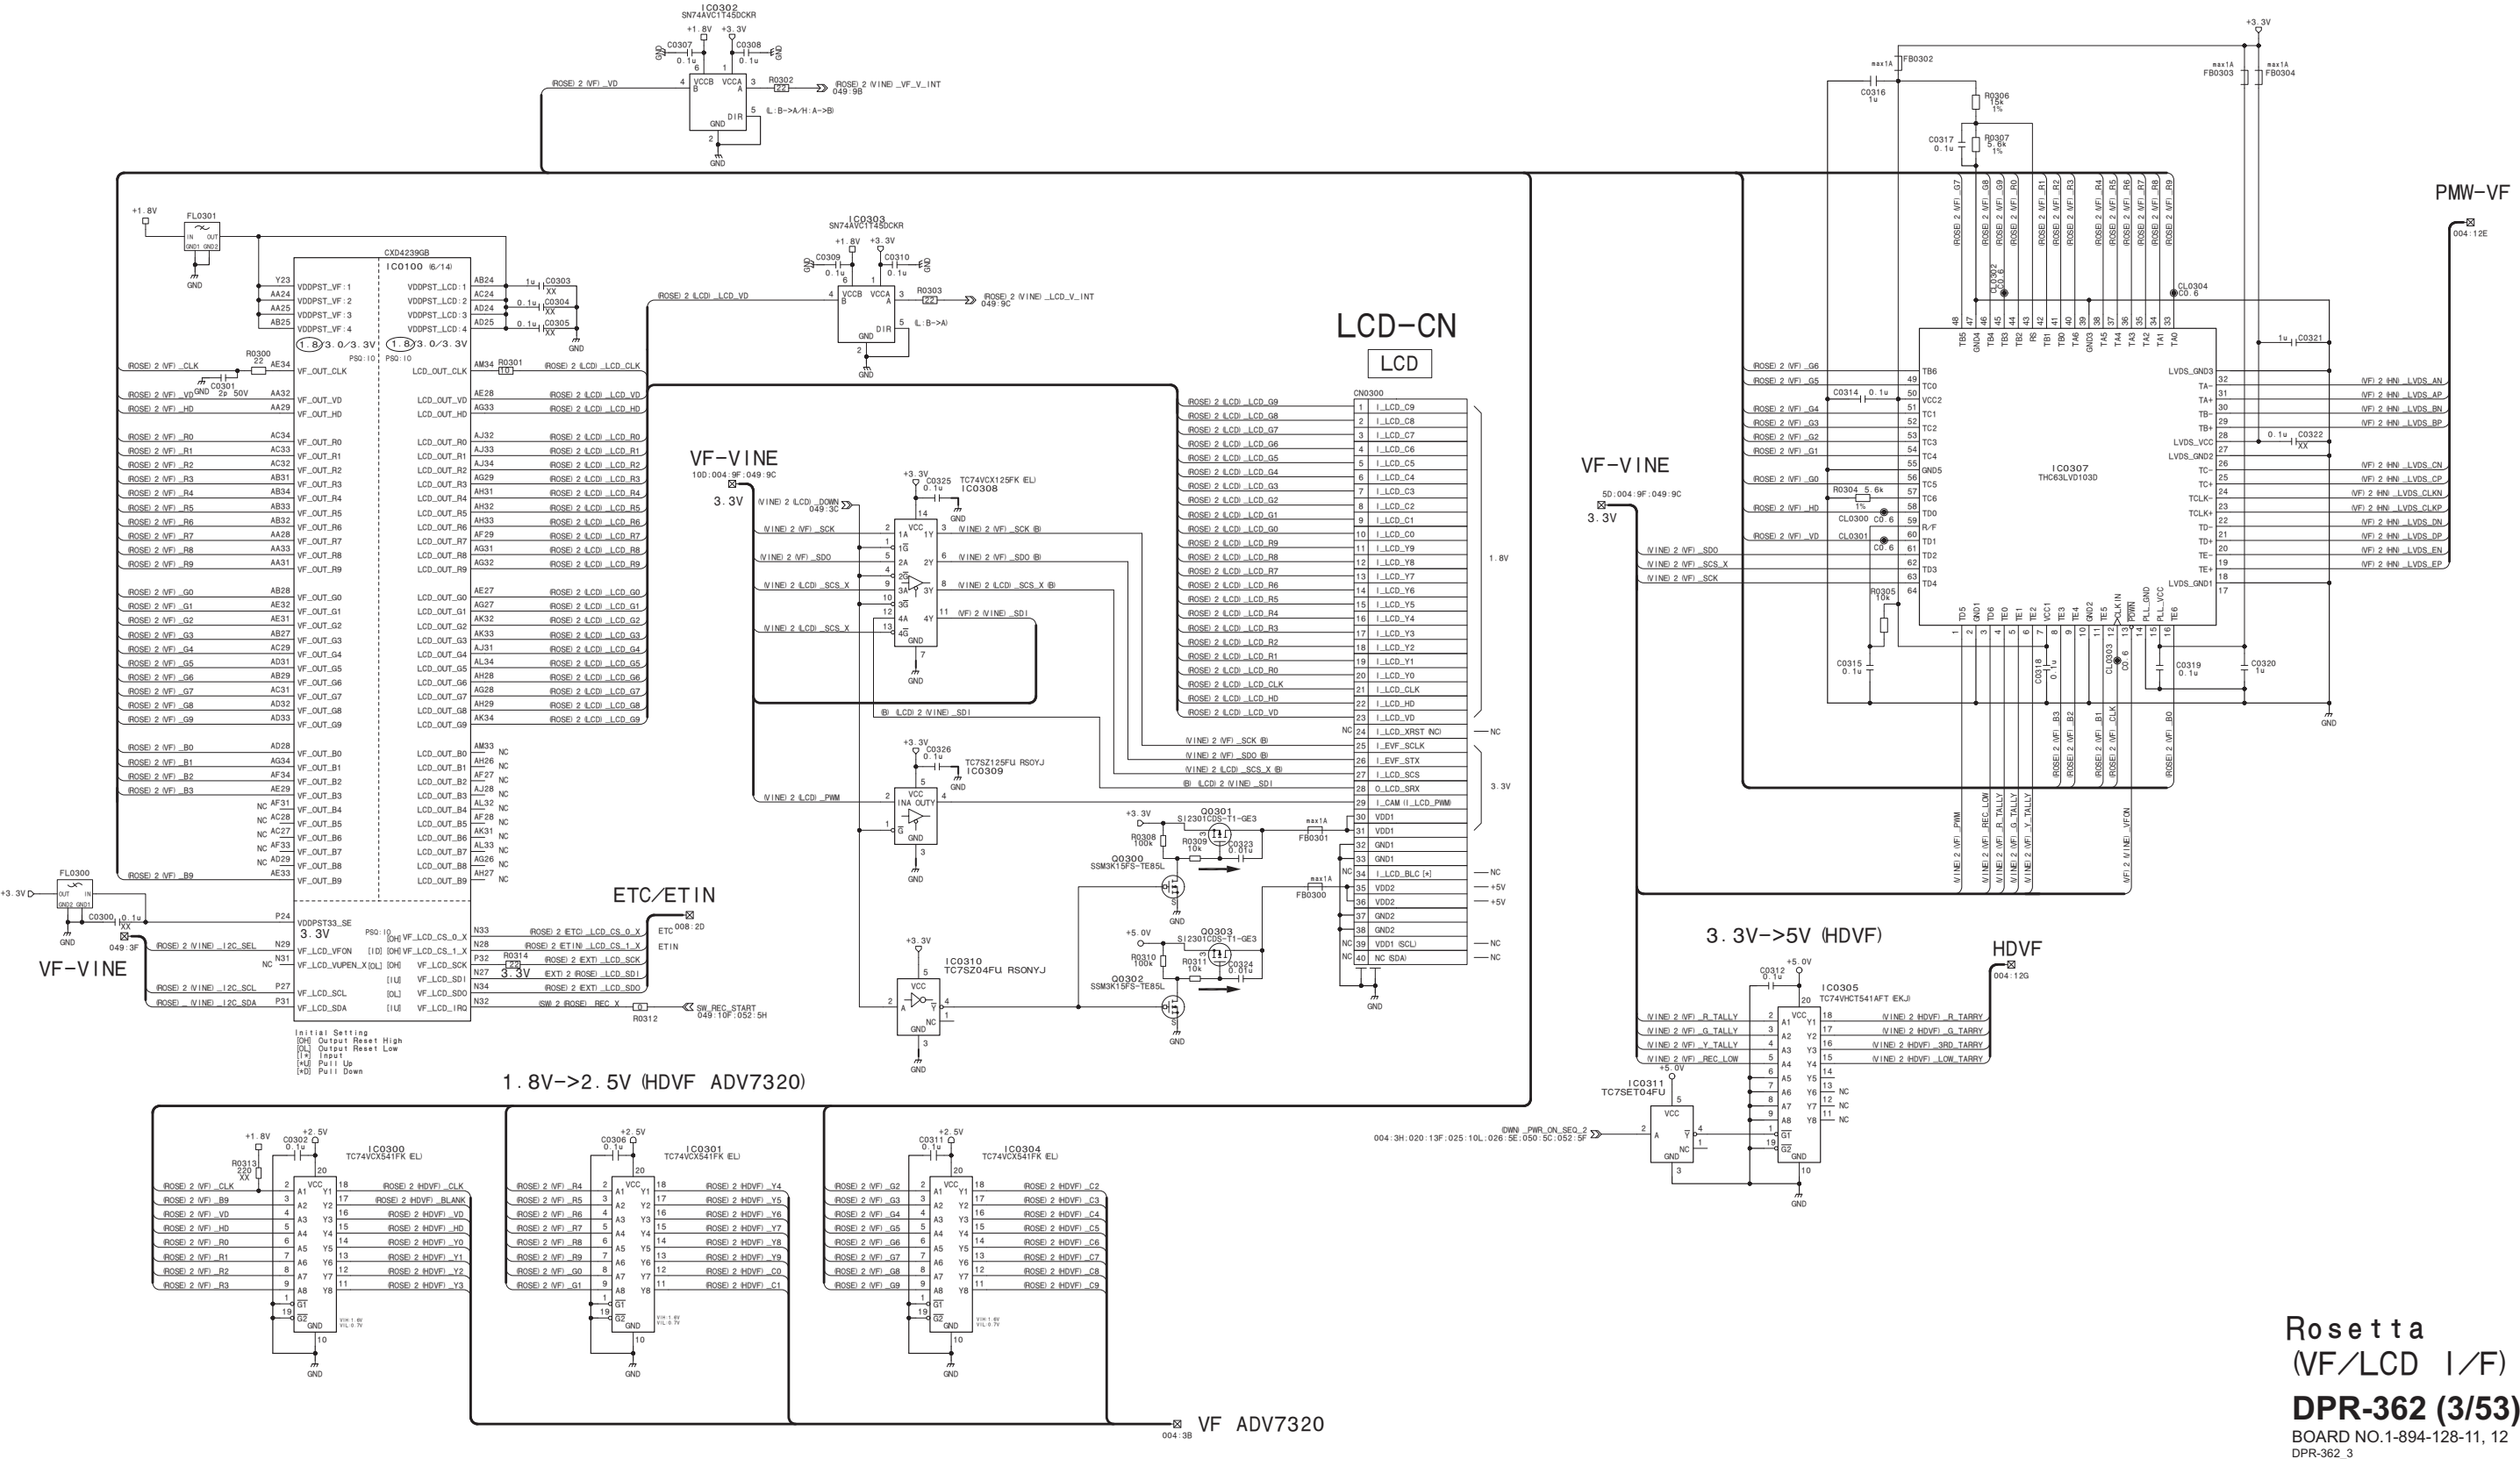

2-26






BOARD NO.1-894-128-11, 12
DPR-362_5






External CN

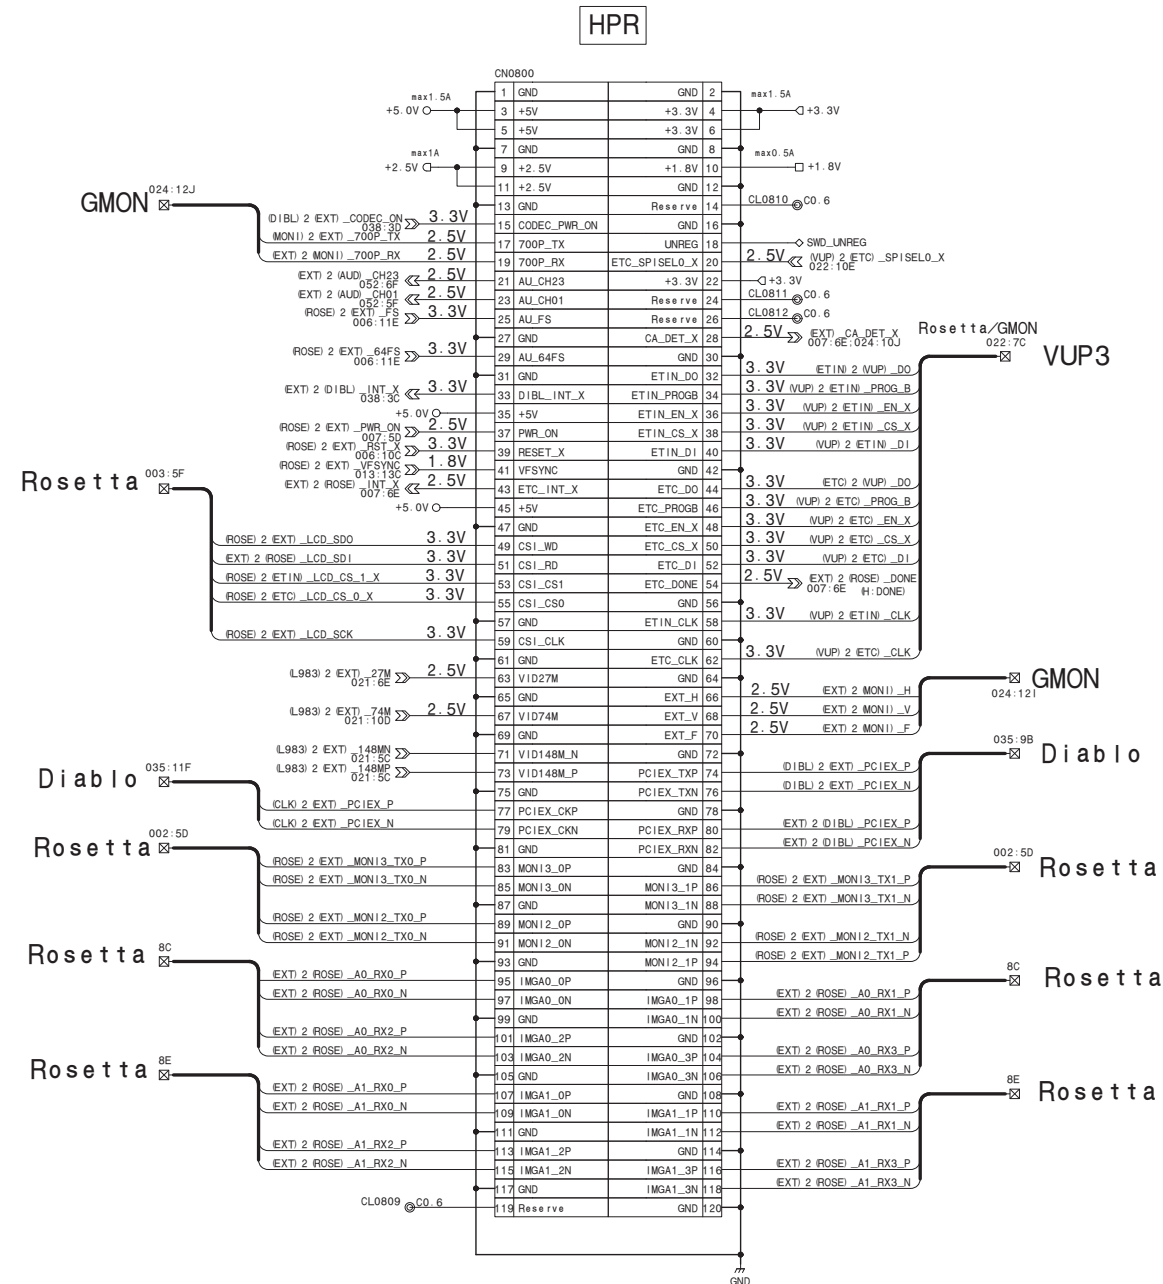

Rosetta GCS2

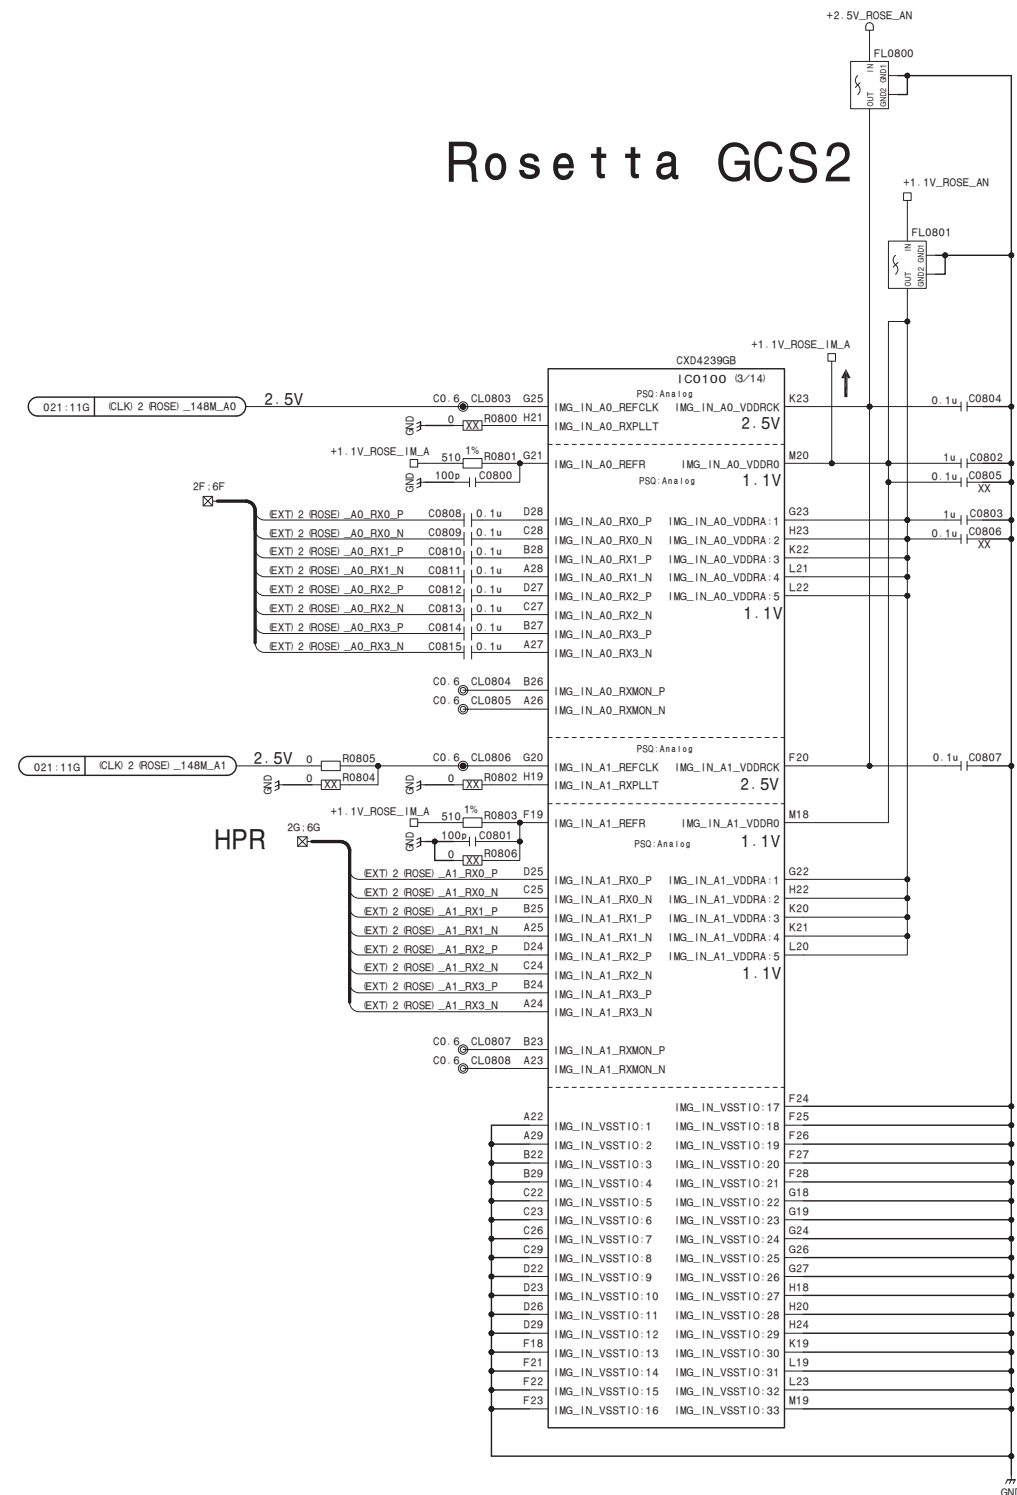

R o s e t t a H P R I / F

DPR-362 (8/53)




BOARD NO.1-894-128-11, 12
DPR-362_8

DDR3





PXW-X500




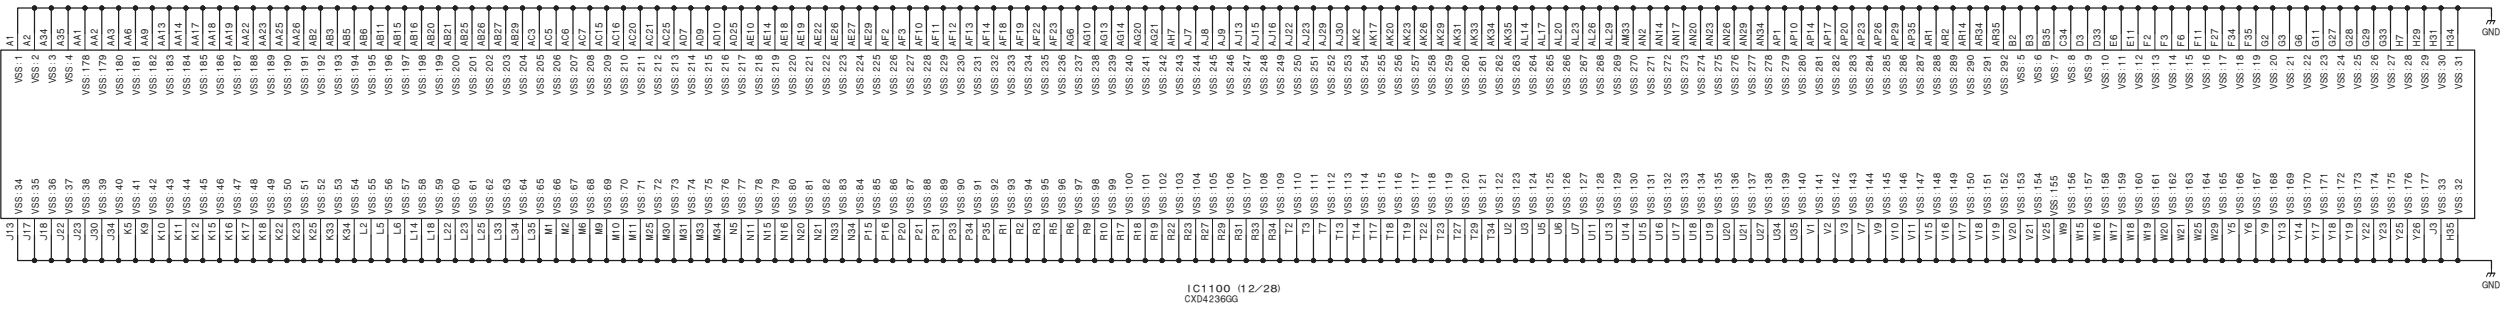
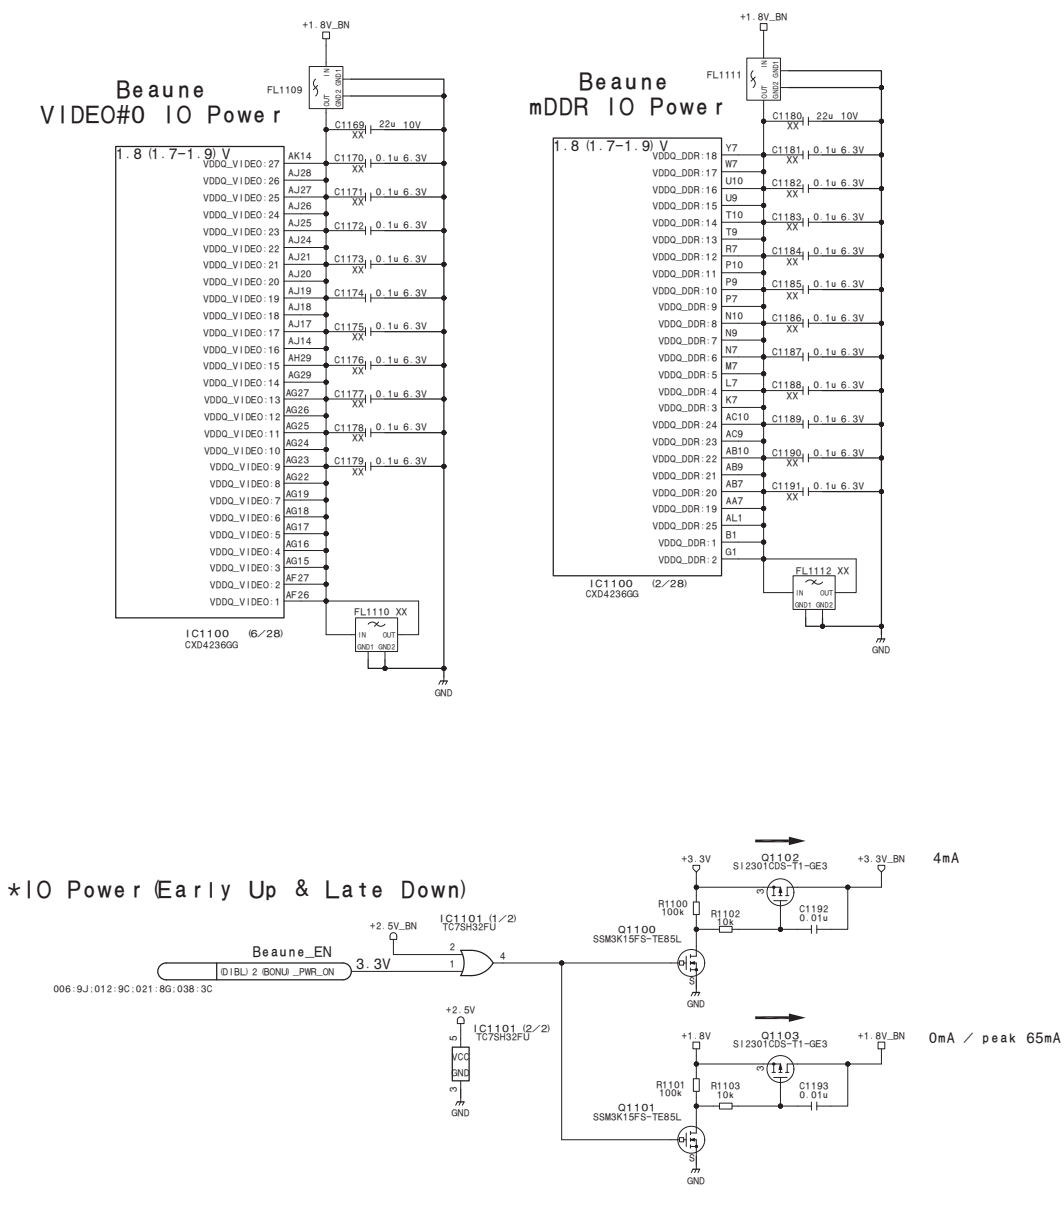
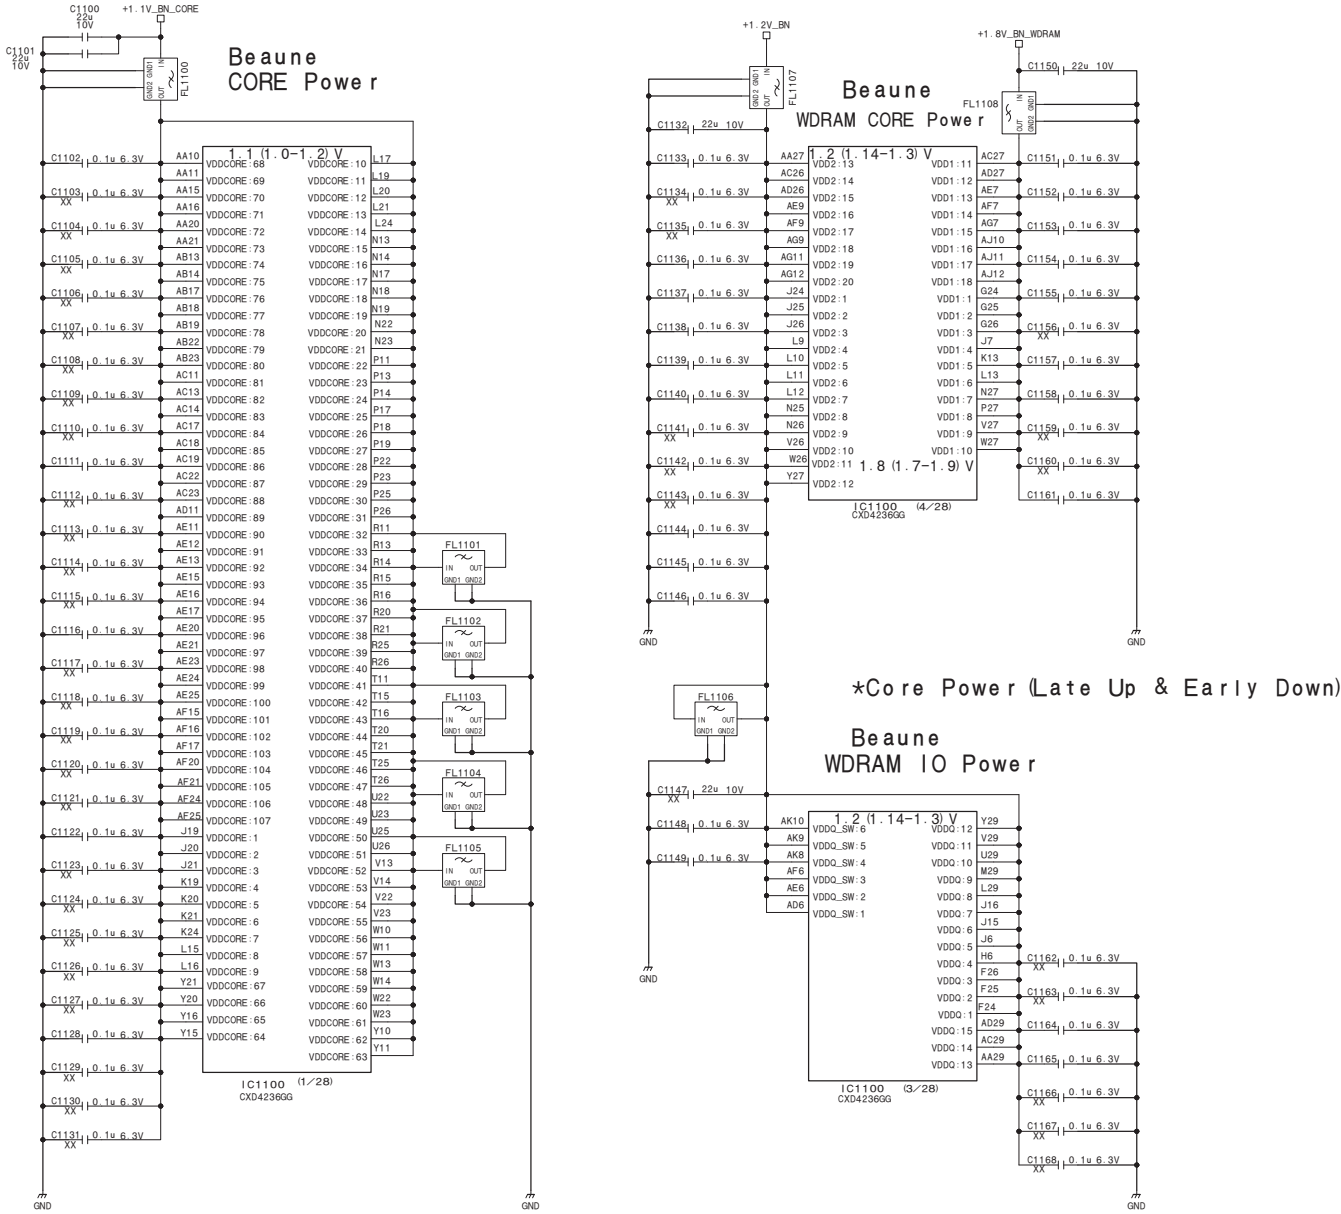


DPR-362 (12/53)


not use mDDR

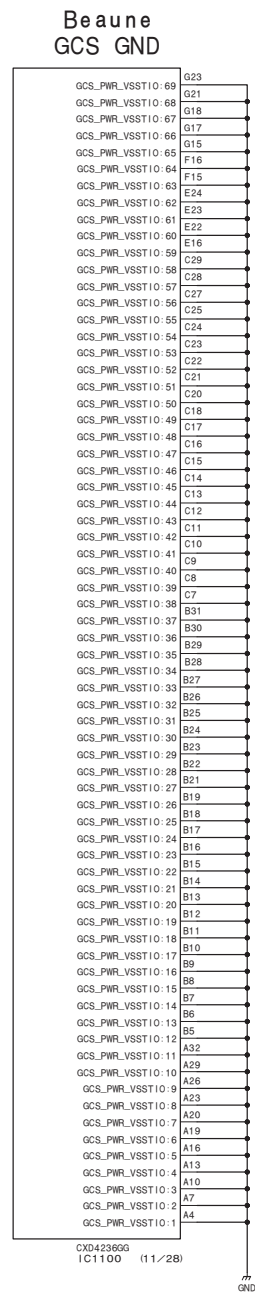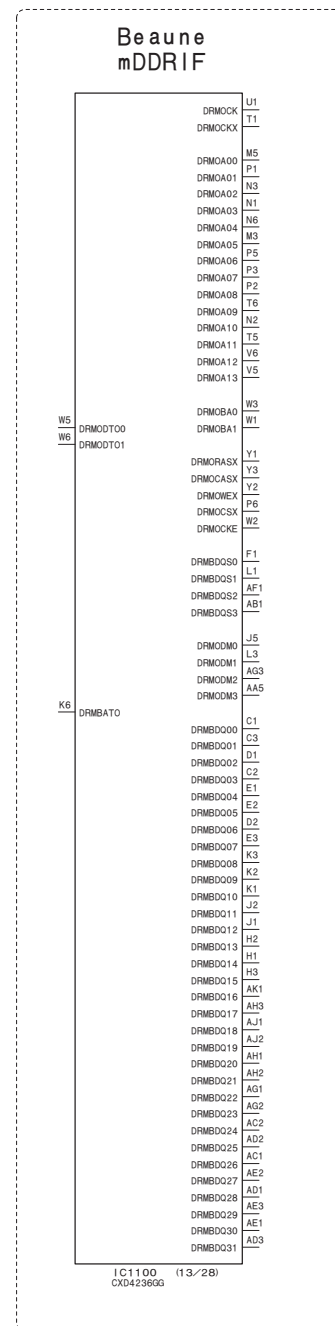


*Core Power (Late Up & Early Down)

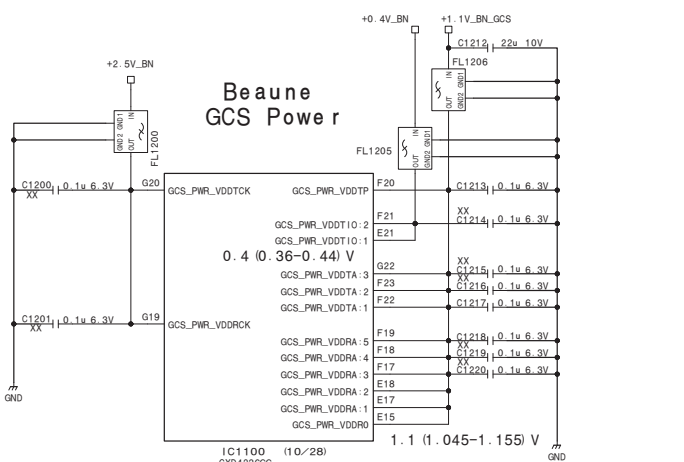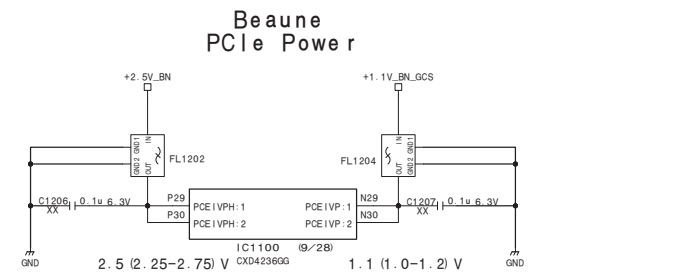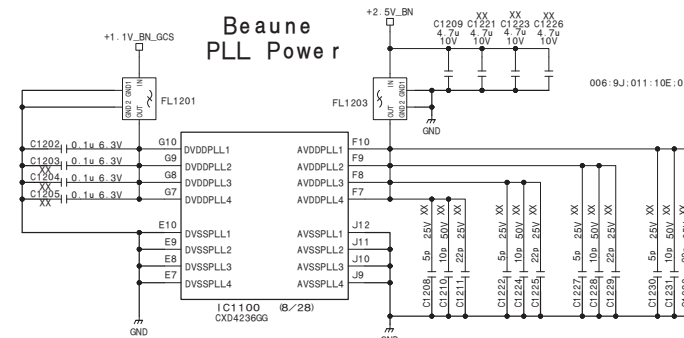


CORE Power +1.1V

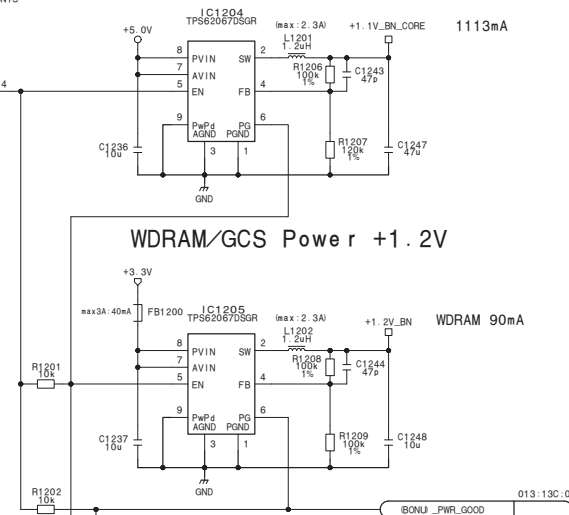


WDRAM (VDD1) Power +1.8V

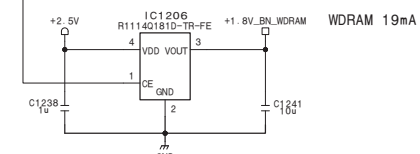


PLL/PCle/GCS Power +2.5V

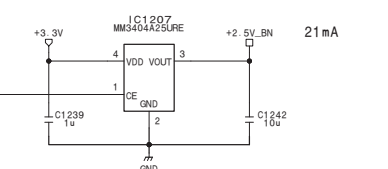



GCS/PLL/PCIe Power +1.1V

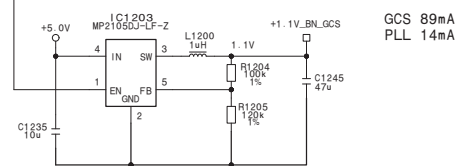

GCS Power +0.4V

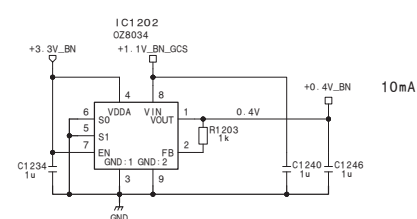


*10 Power (Early Up & Late Down)

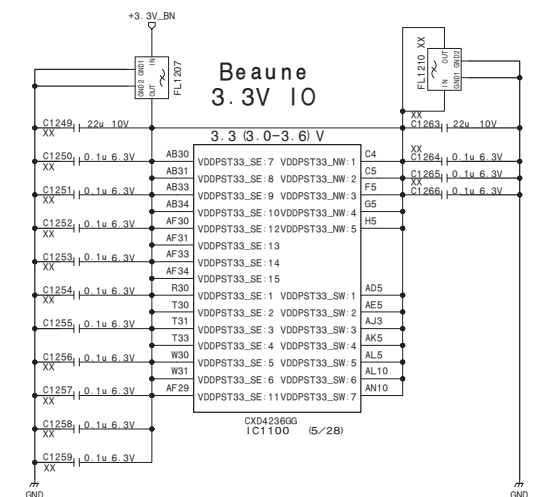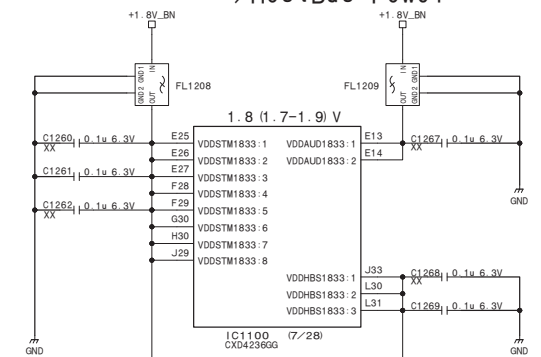Beaune
Audio/Stream
/HostBus Power


Beaune Power2

DPR-362 (12/53)

BOARD NO.1-894-128-11, 12
DPR-362_12

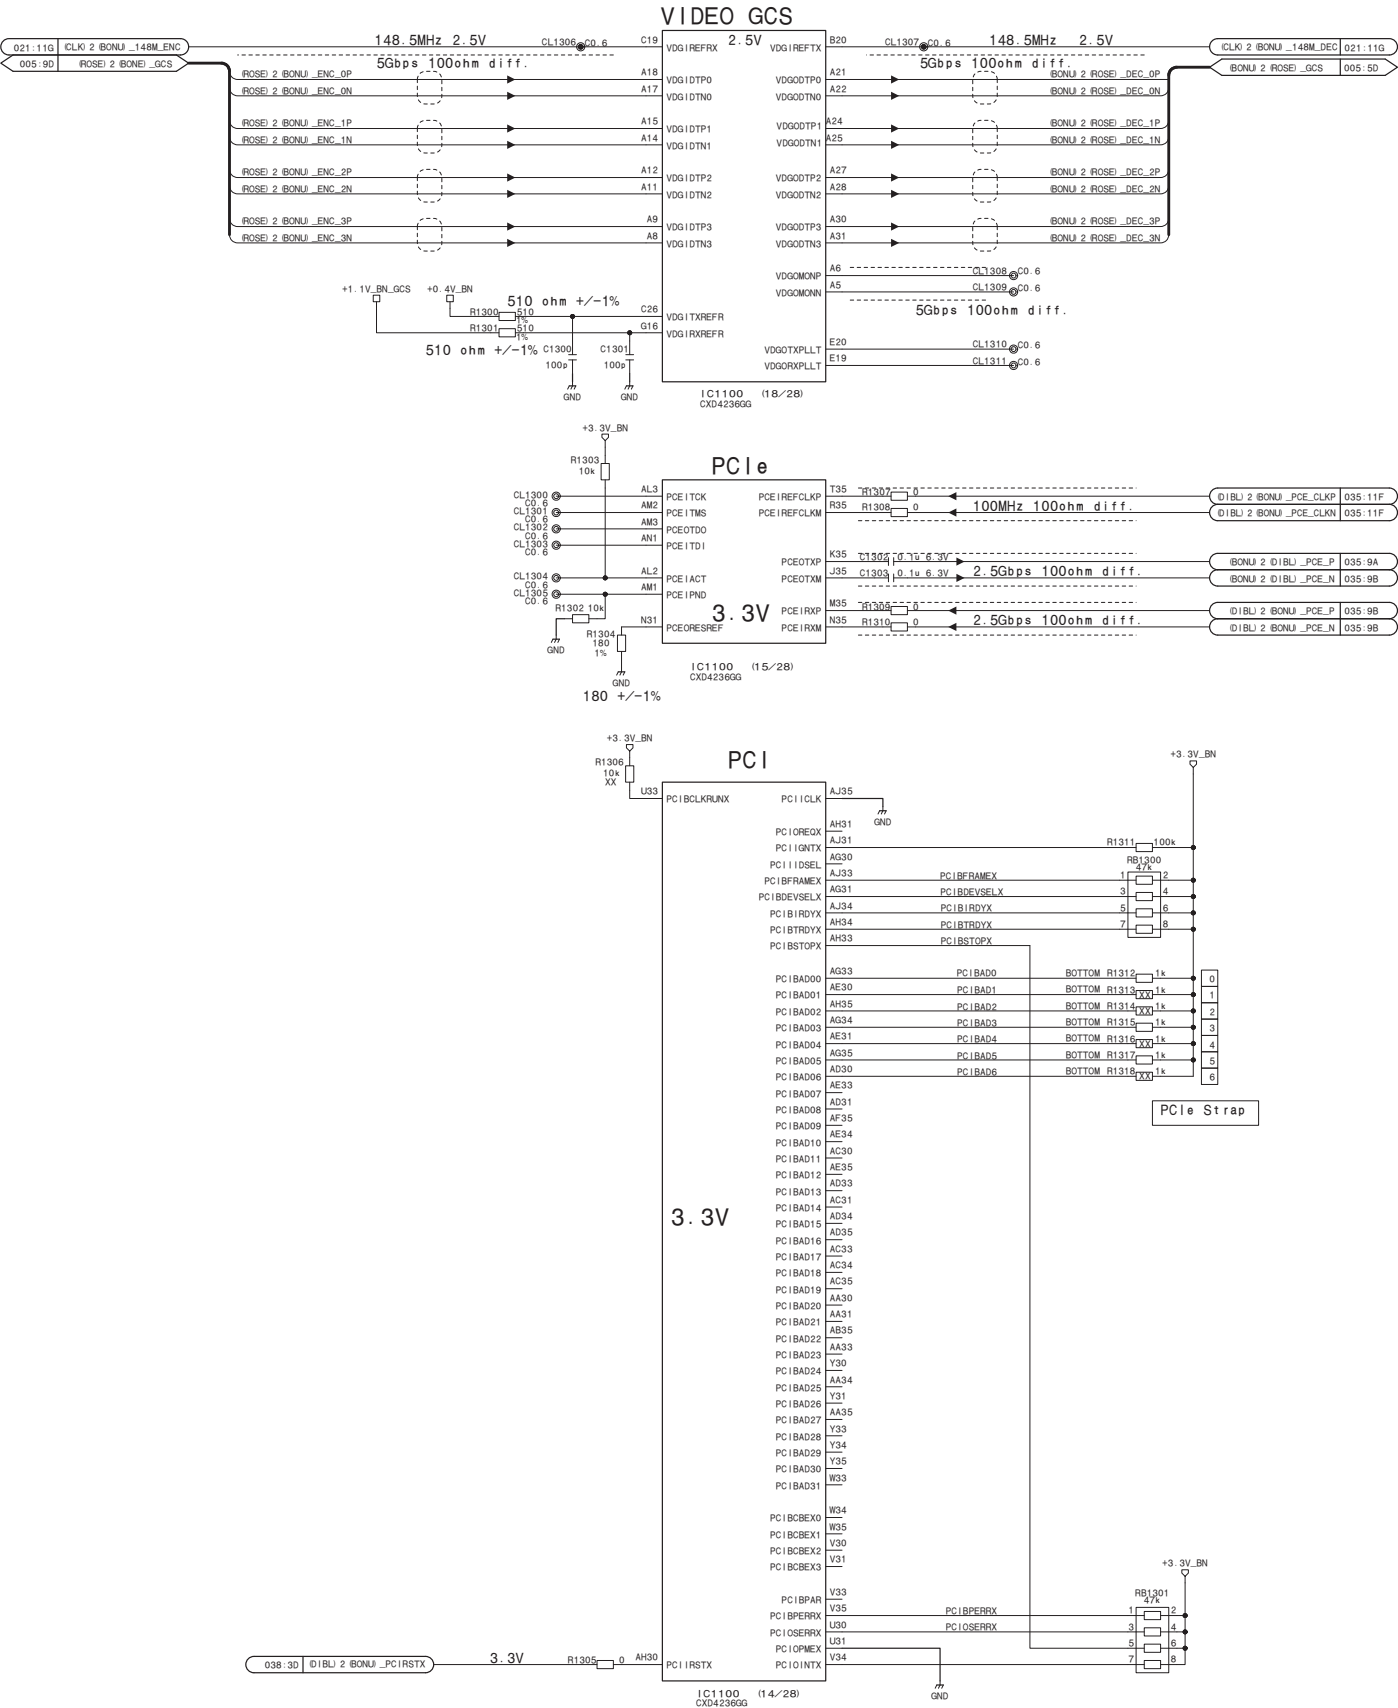

VIDEO #0

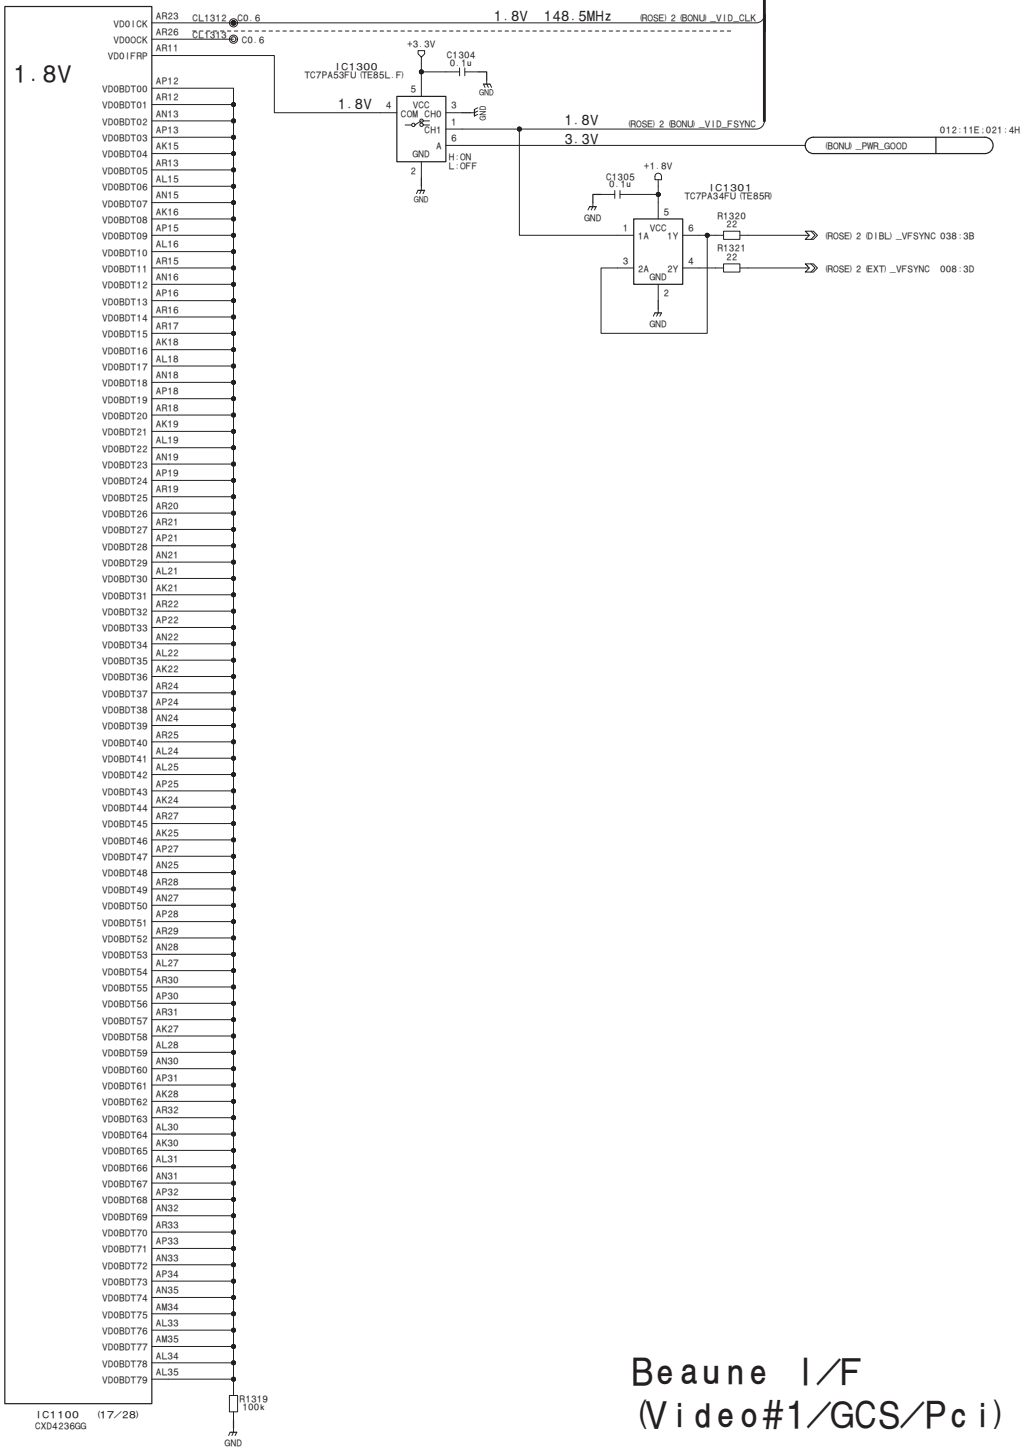


Beaune I/F
(Video#1/GCS/Pci)
(PCIE)



DPR-362 (13/53)
BOARD NO.1-894-128-11, 12
DPR-362_13

DPR-362 (14/53)


AUDIO #0

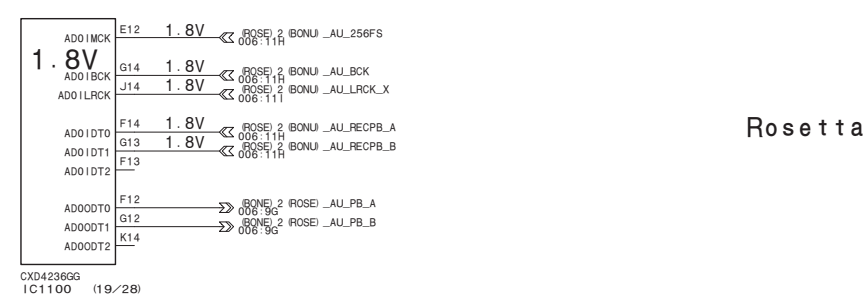


Rosetta

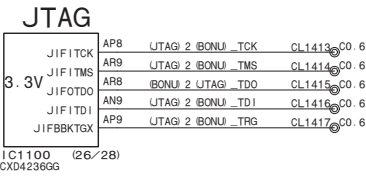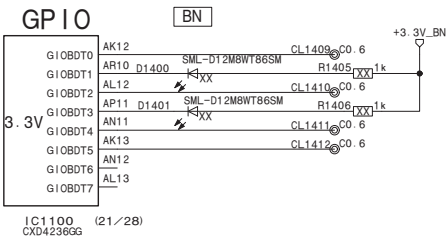

HOST IF

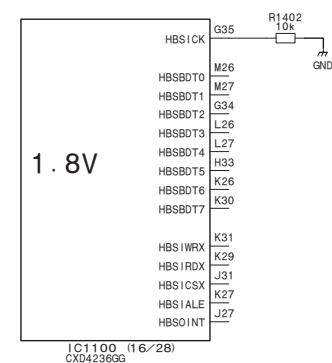


SERIAL

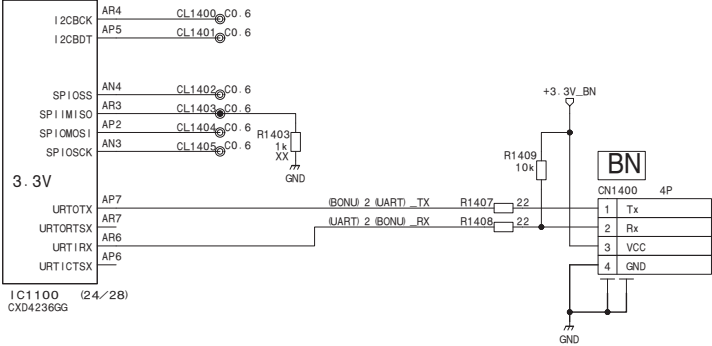


Factory Use


Debug TPD




TEST




STREAM

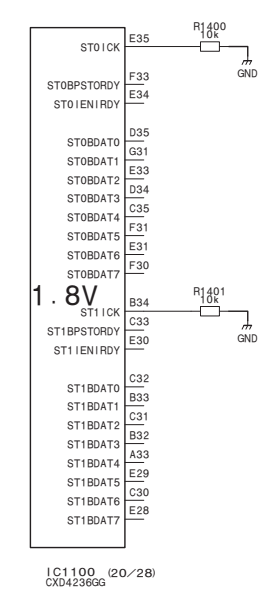

CLOCK

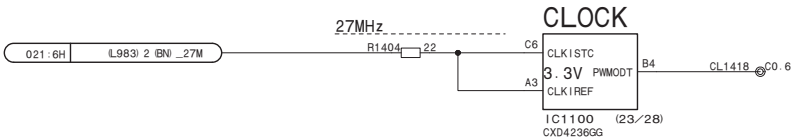

LED




Beaune Misc
(Audio/Host/Stream)
(Debug/Other)


DPR-362 (14/53)




BOARD NO.1-894-128-11, 12
DPR-362_14





BOARD NO.1-894-128-11, 12
DPR-362_15





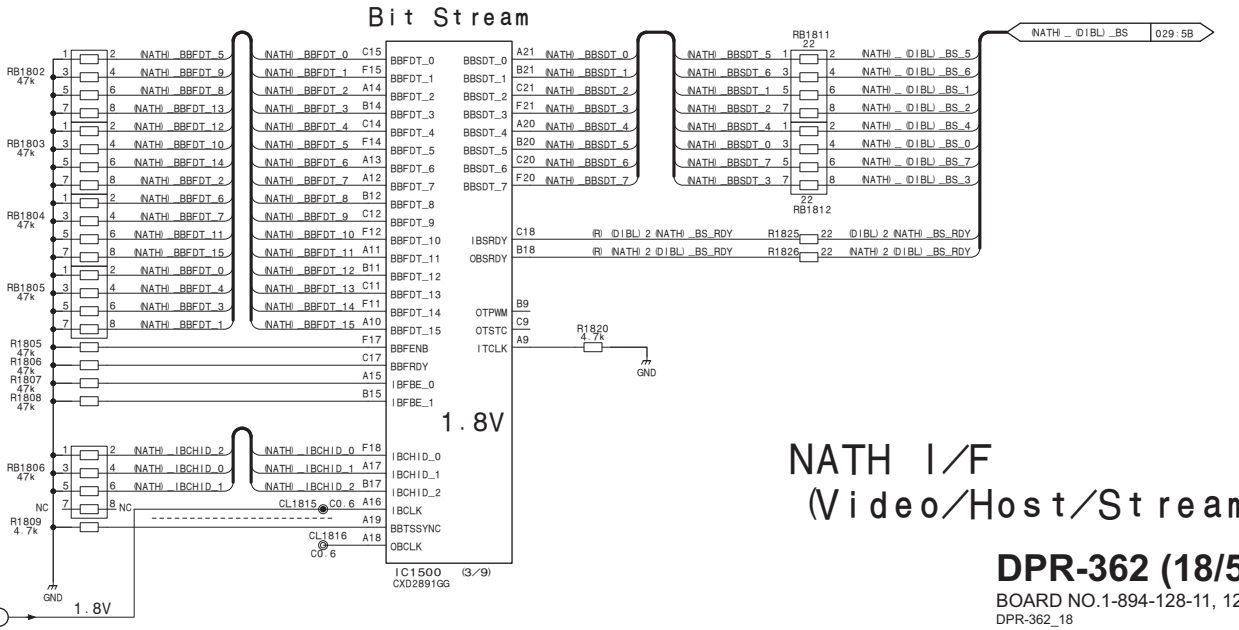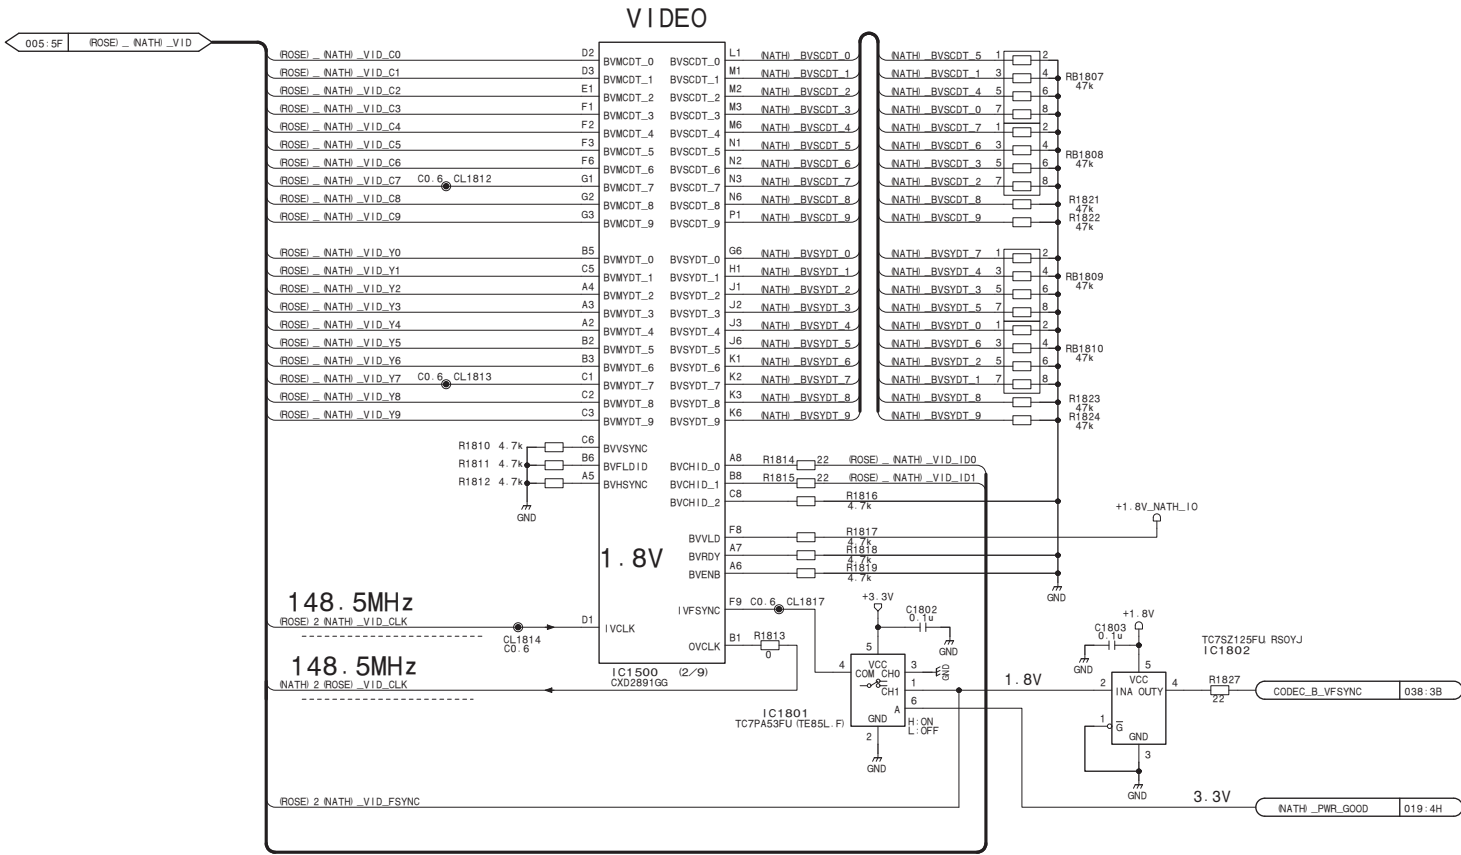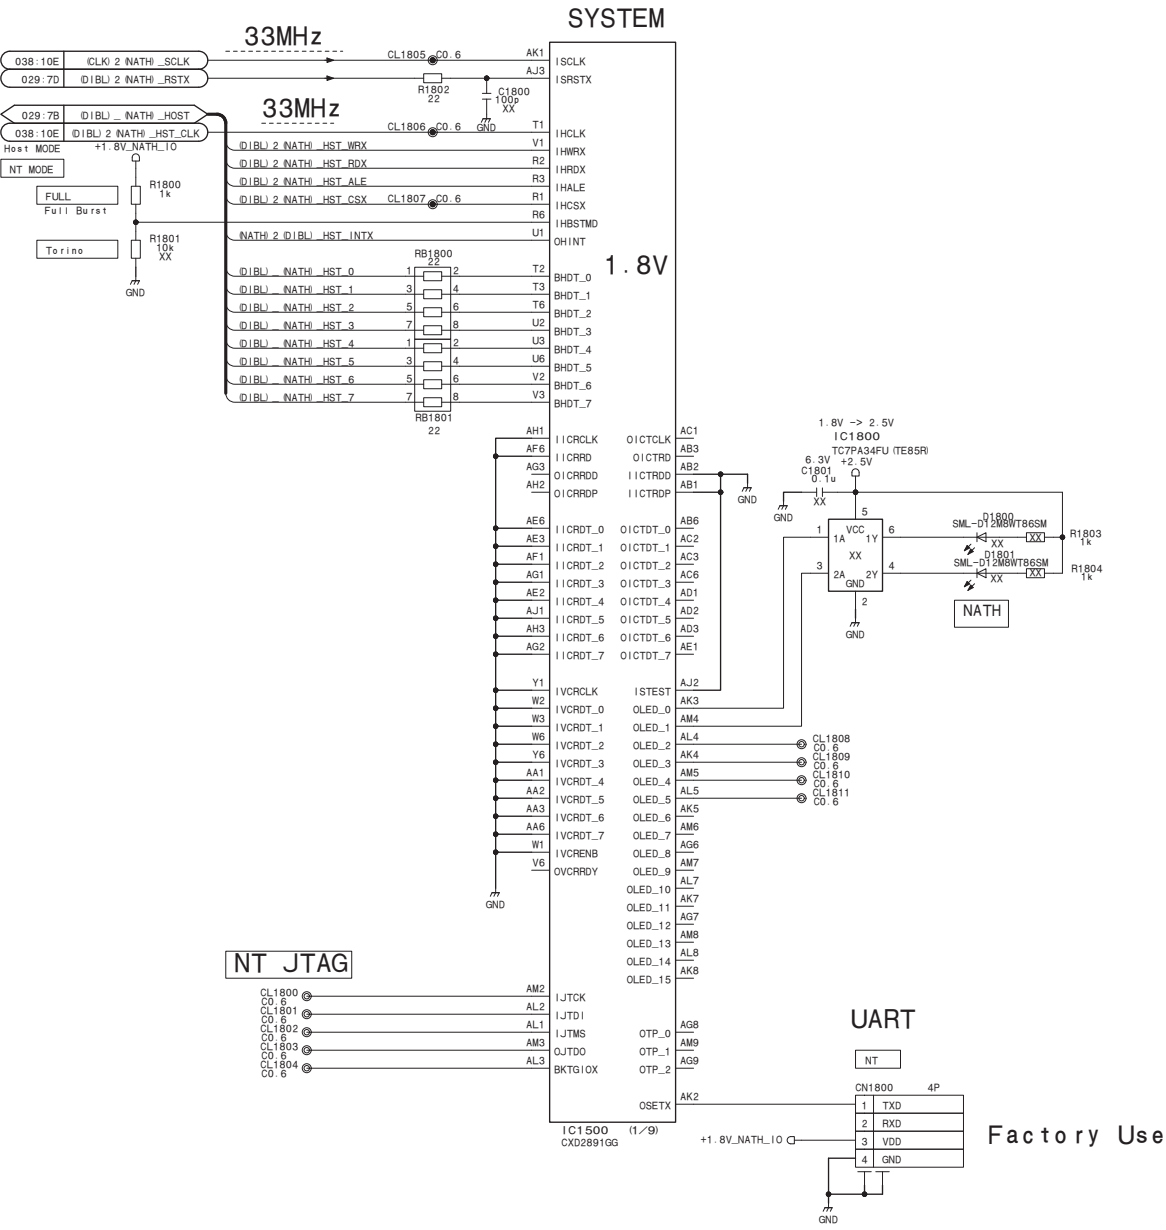

DPR-362 (19/53)

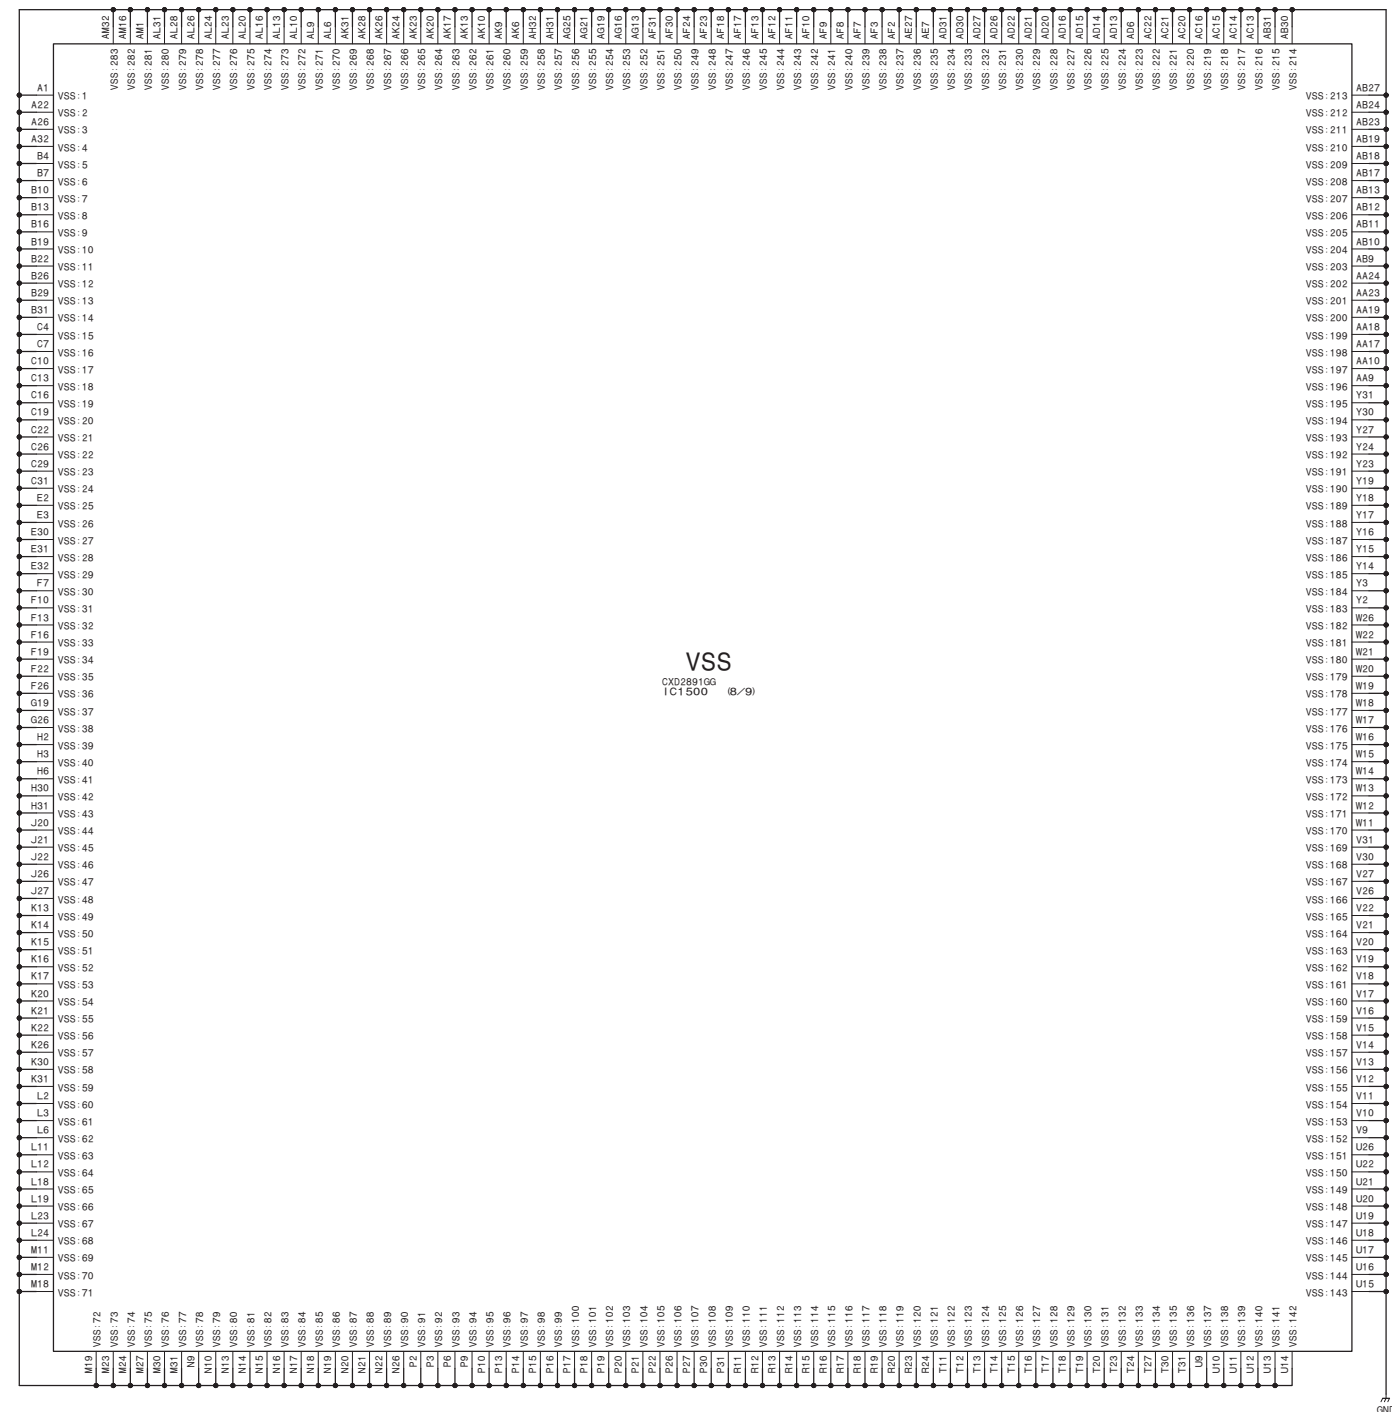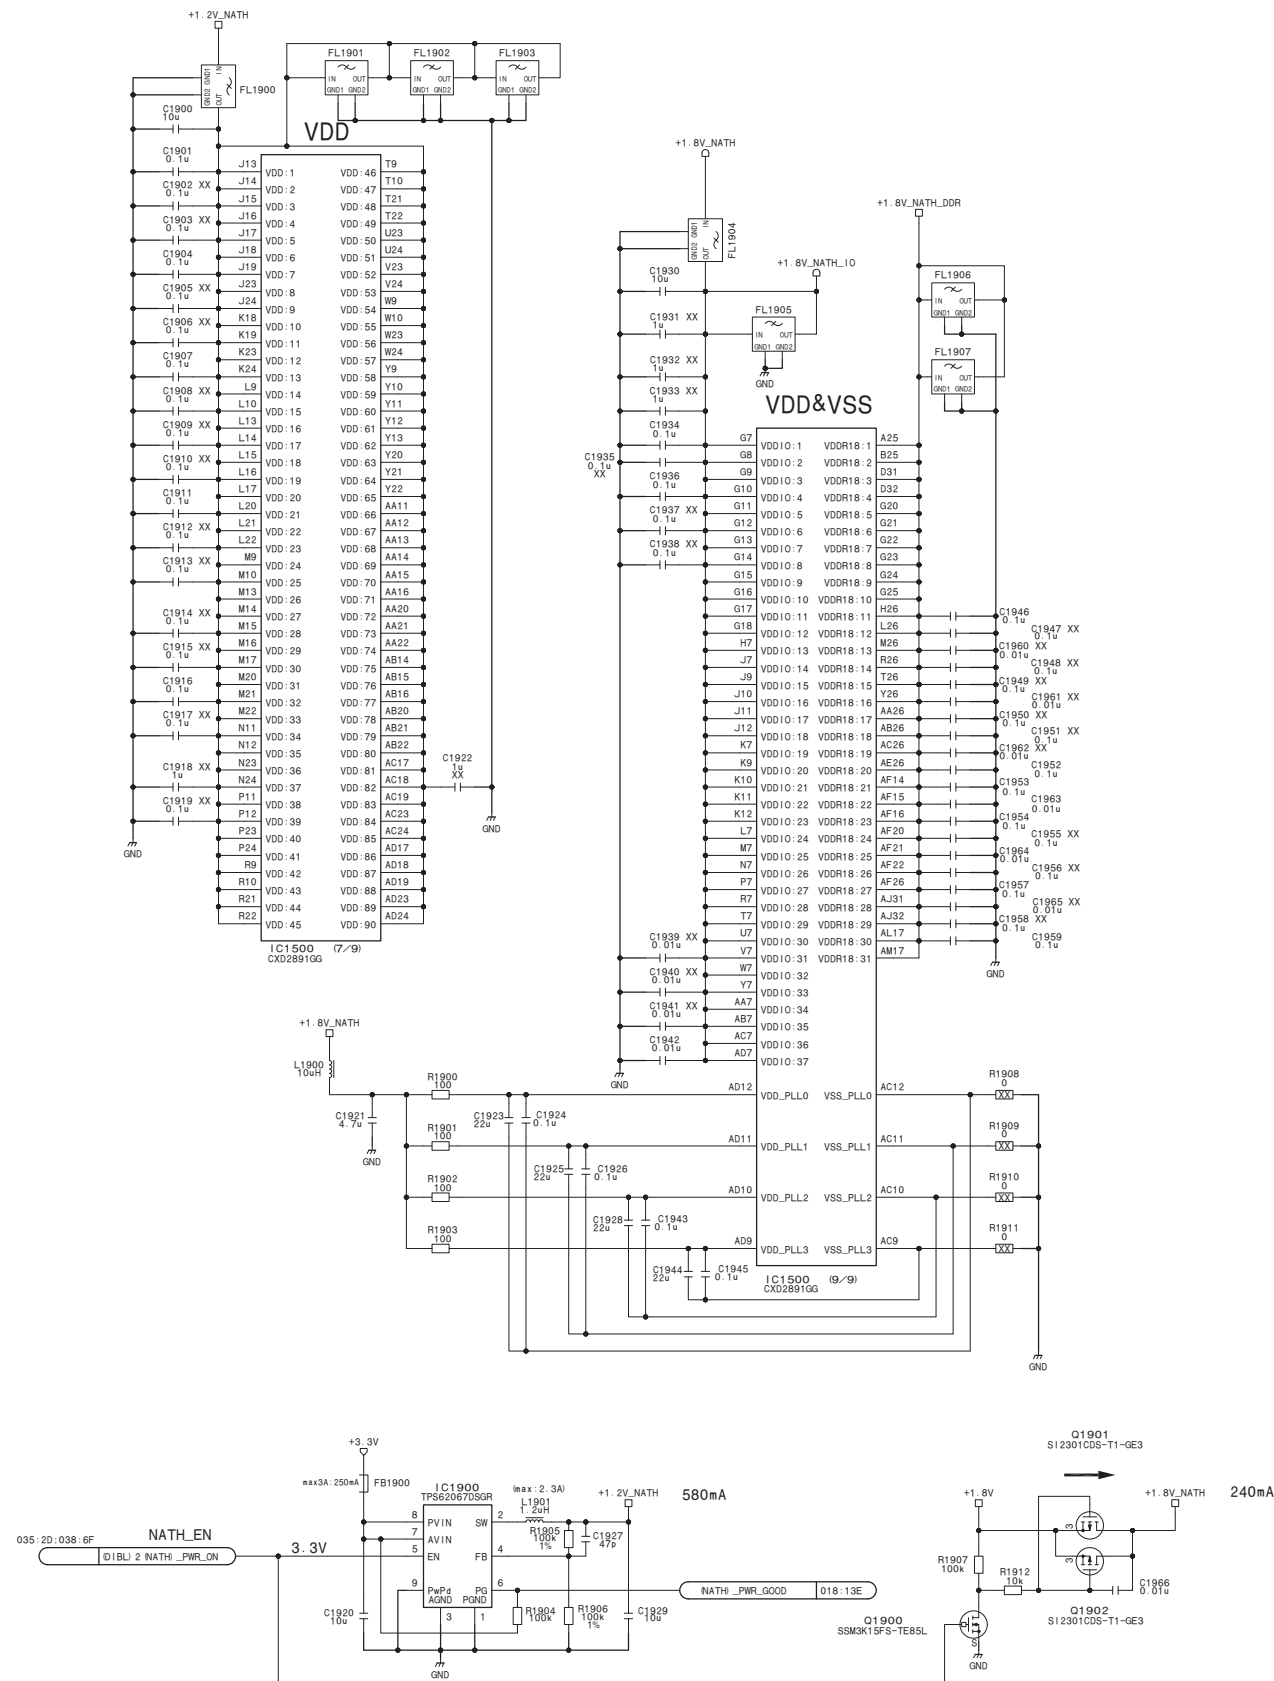


NATH Power
(VDD&VSS)

DPR-362 (19/53)

BOARD NO.1-894-128-11, 12
DPR-362_19


DPR-362 (20/53)

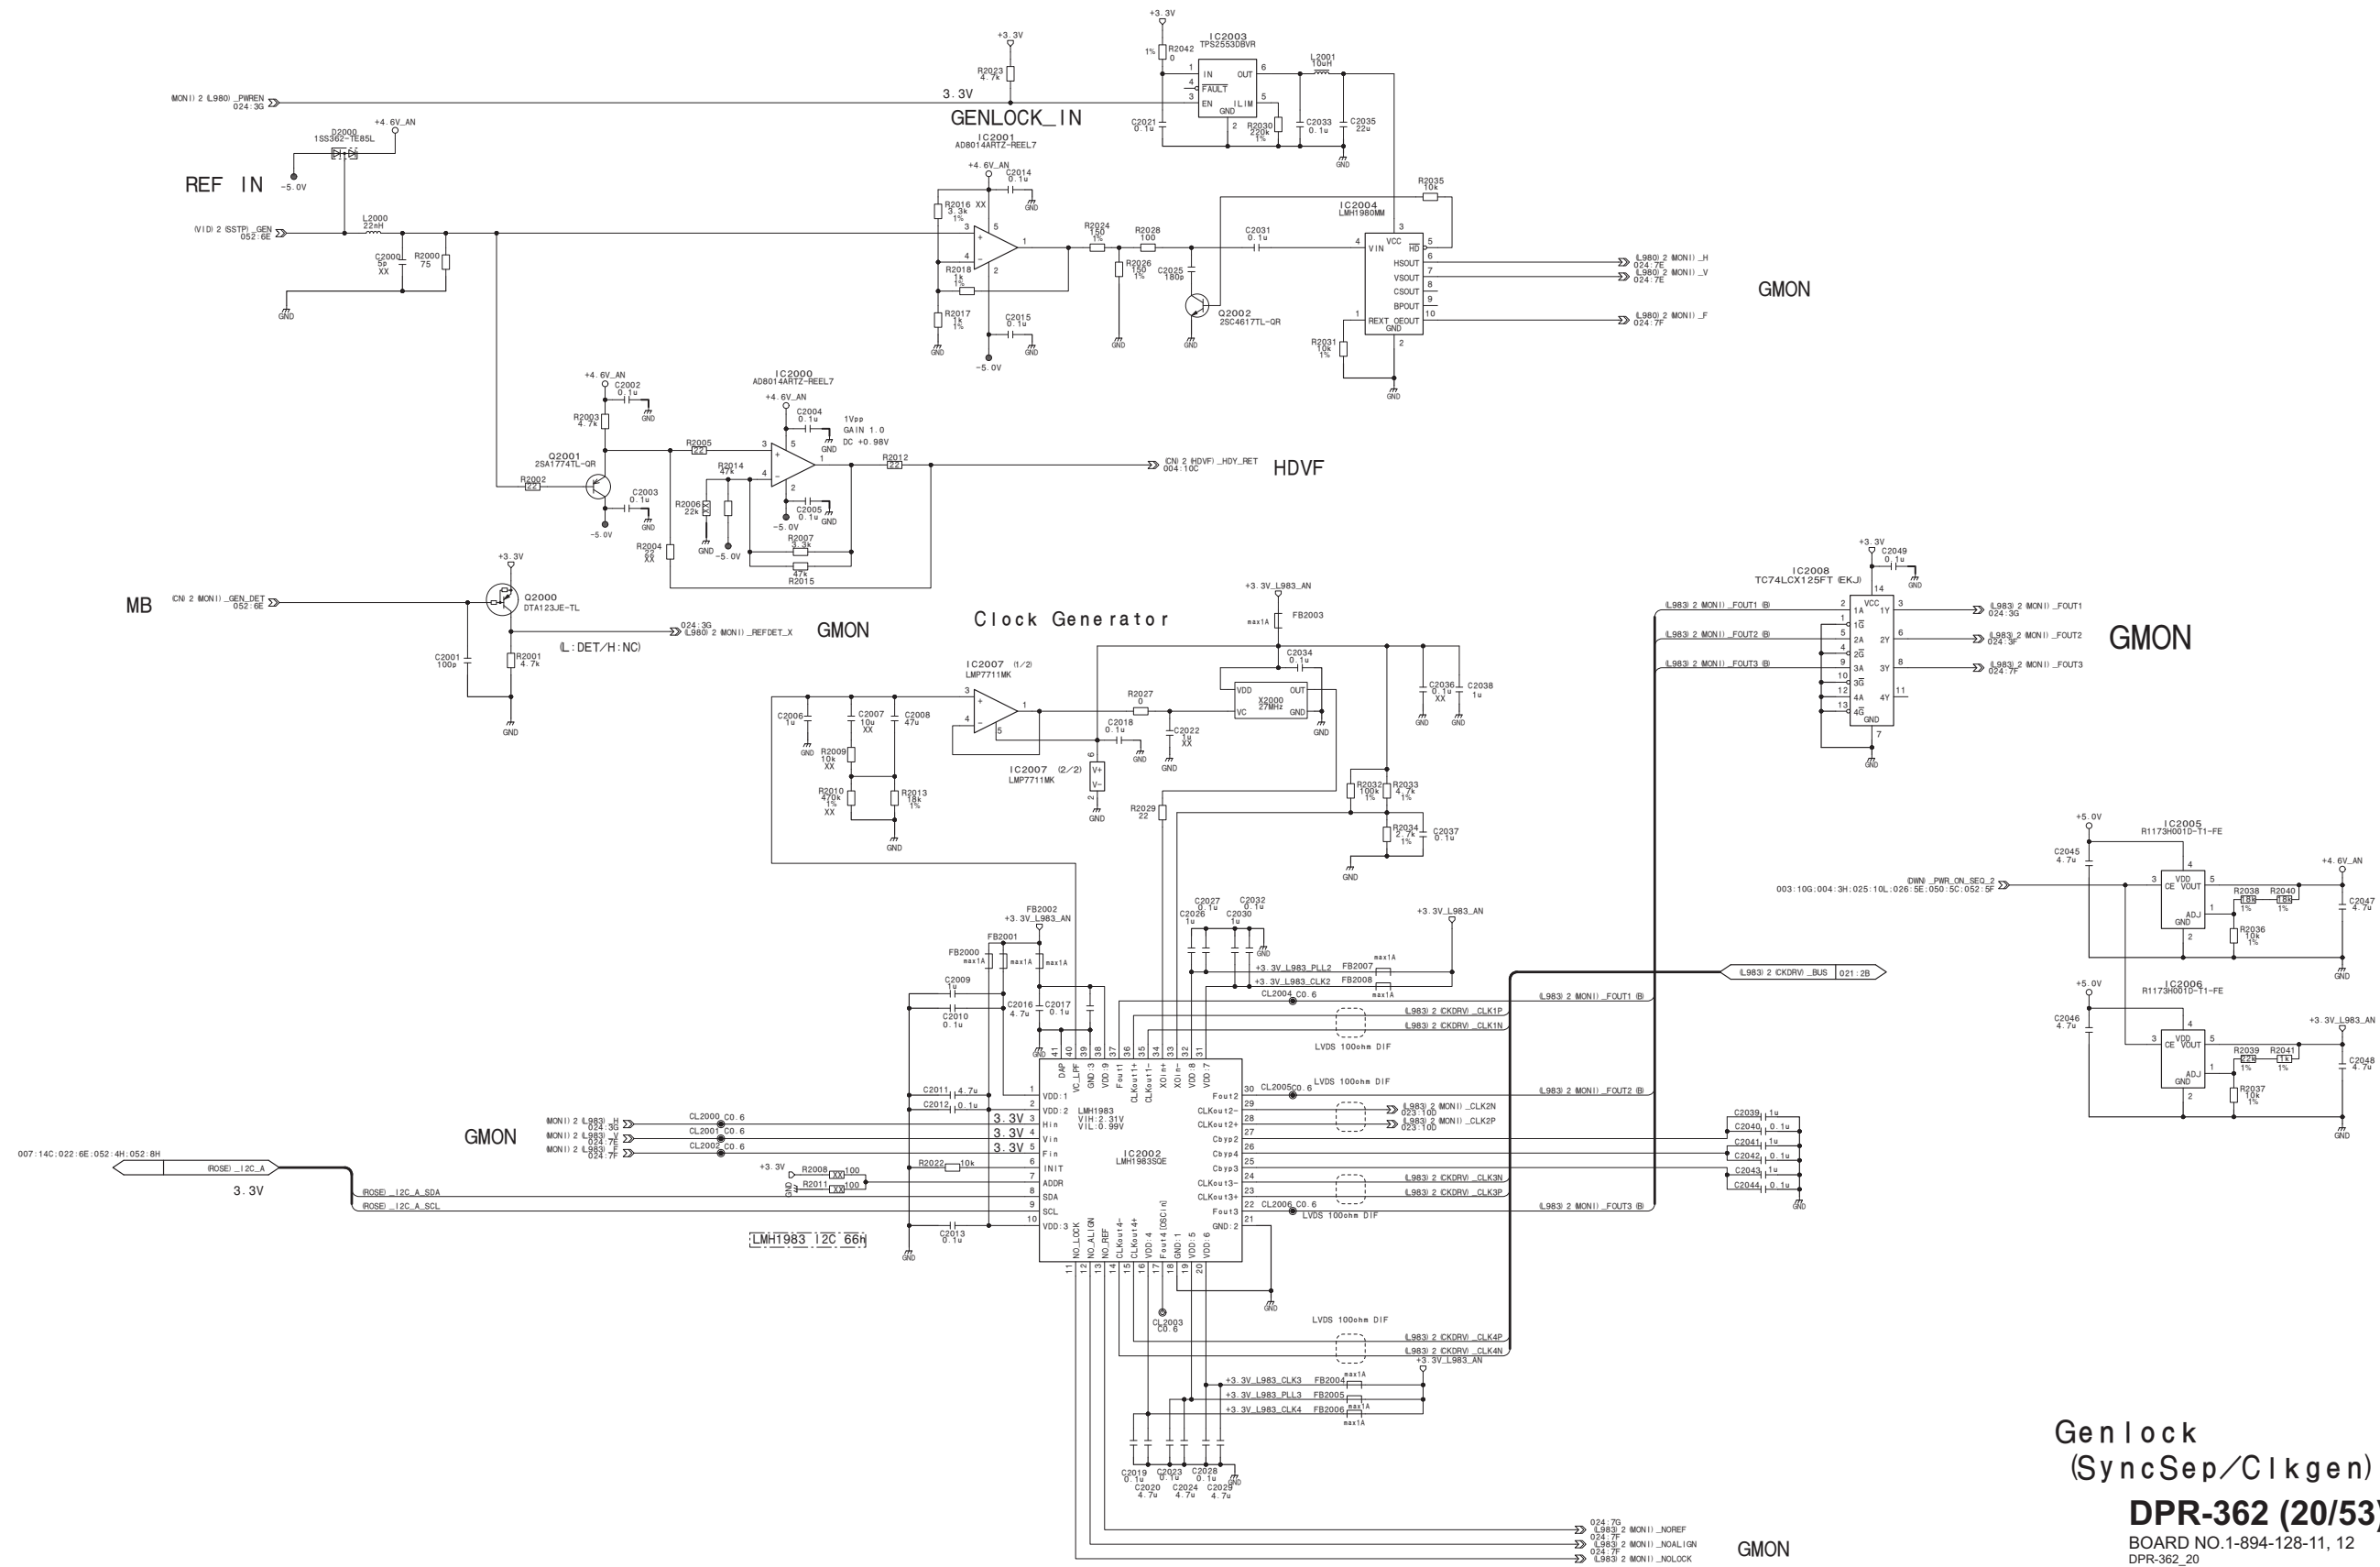




Clock Driver
DPR-362 (21/53)
 BOARD NO.1-894-128-11, 12
 DPR-362_21



DPR-362 (22/53)

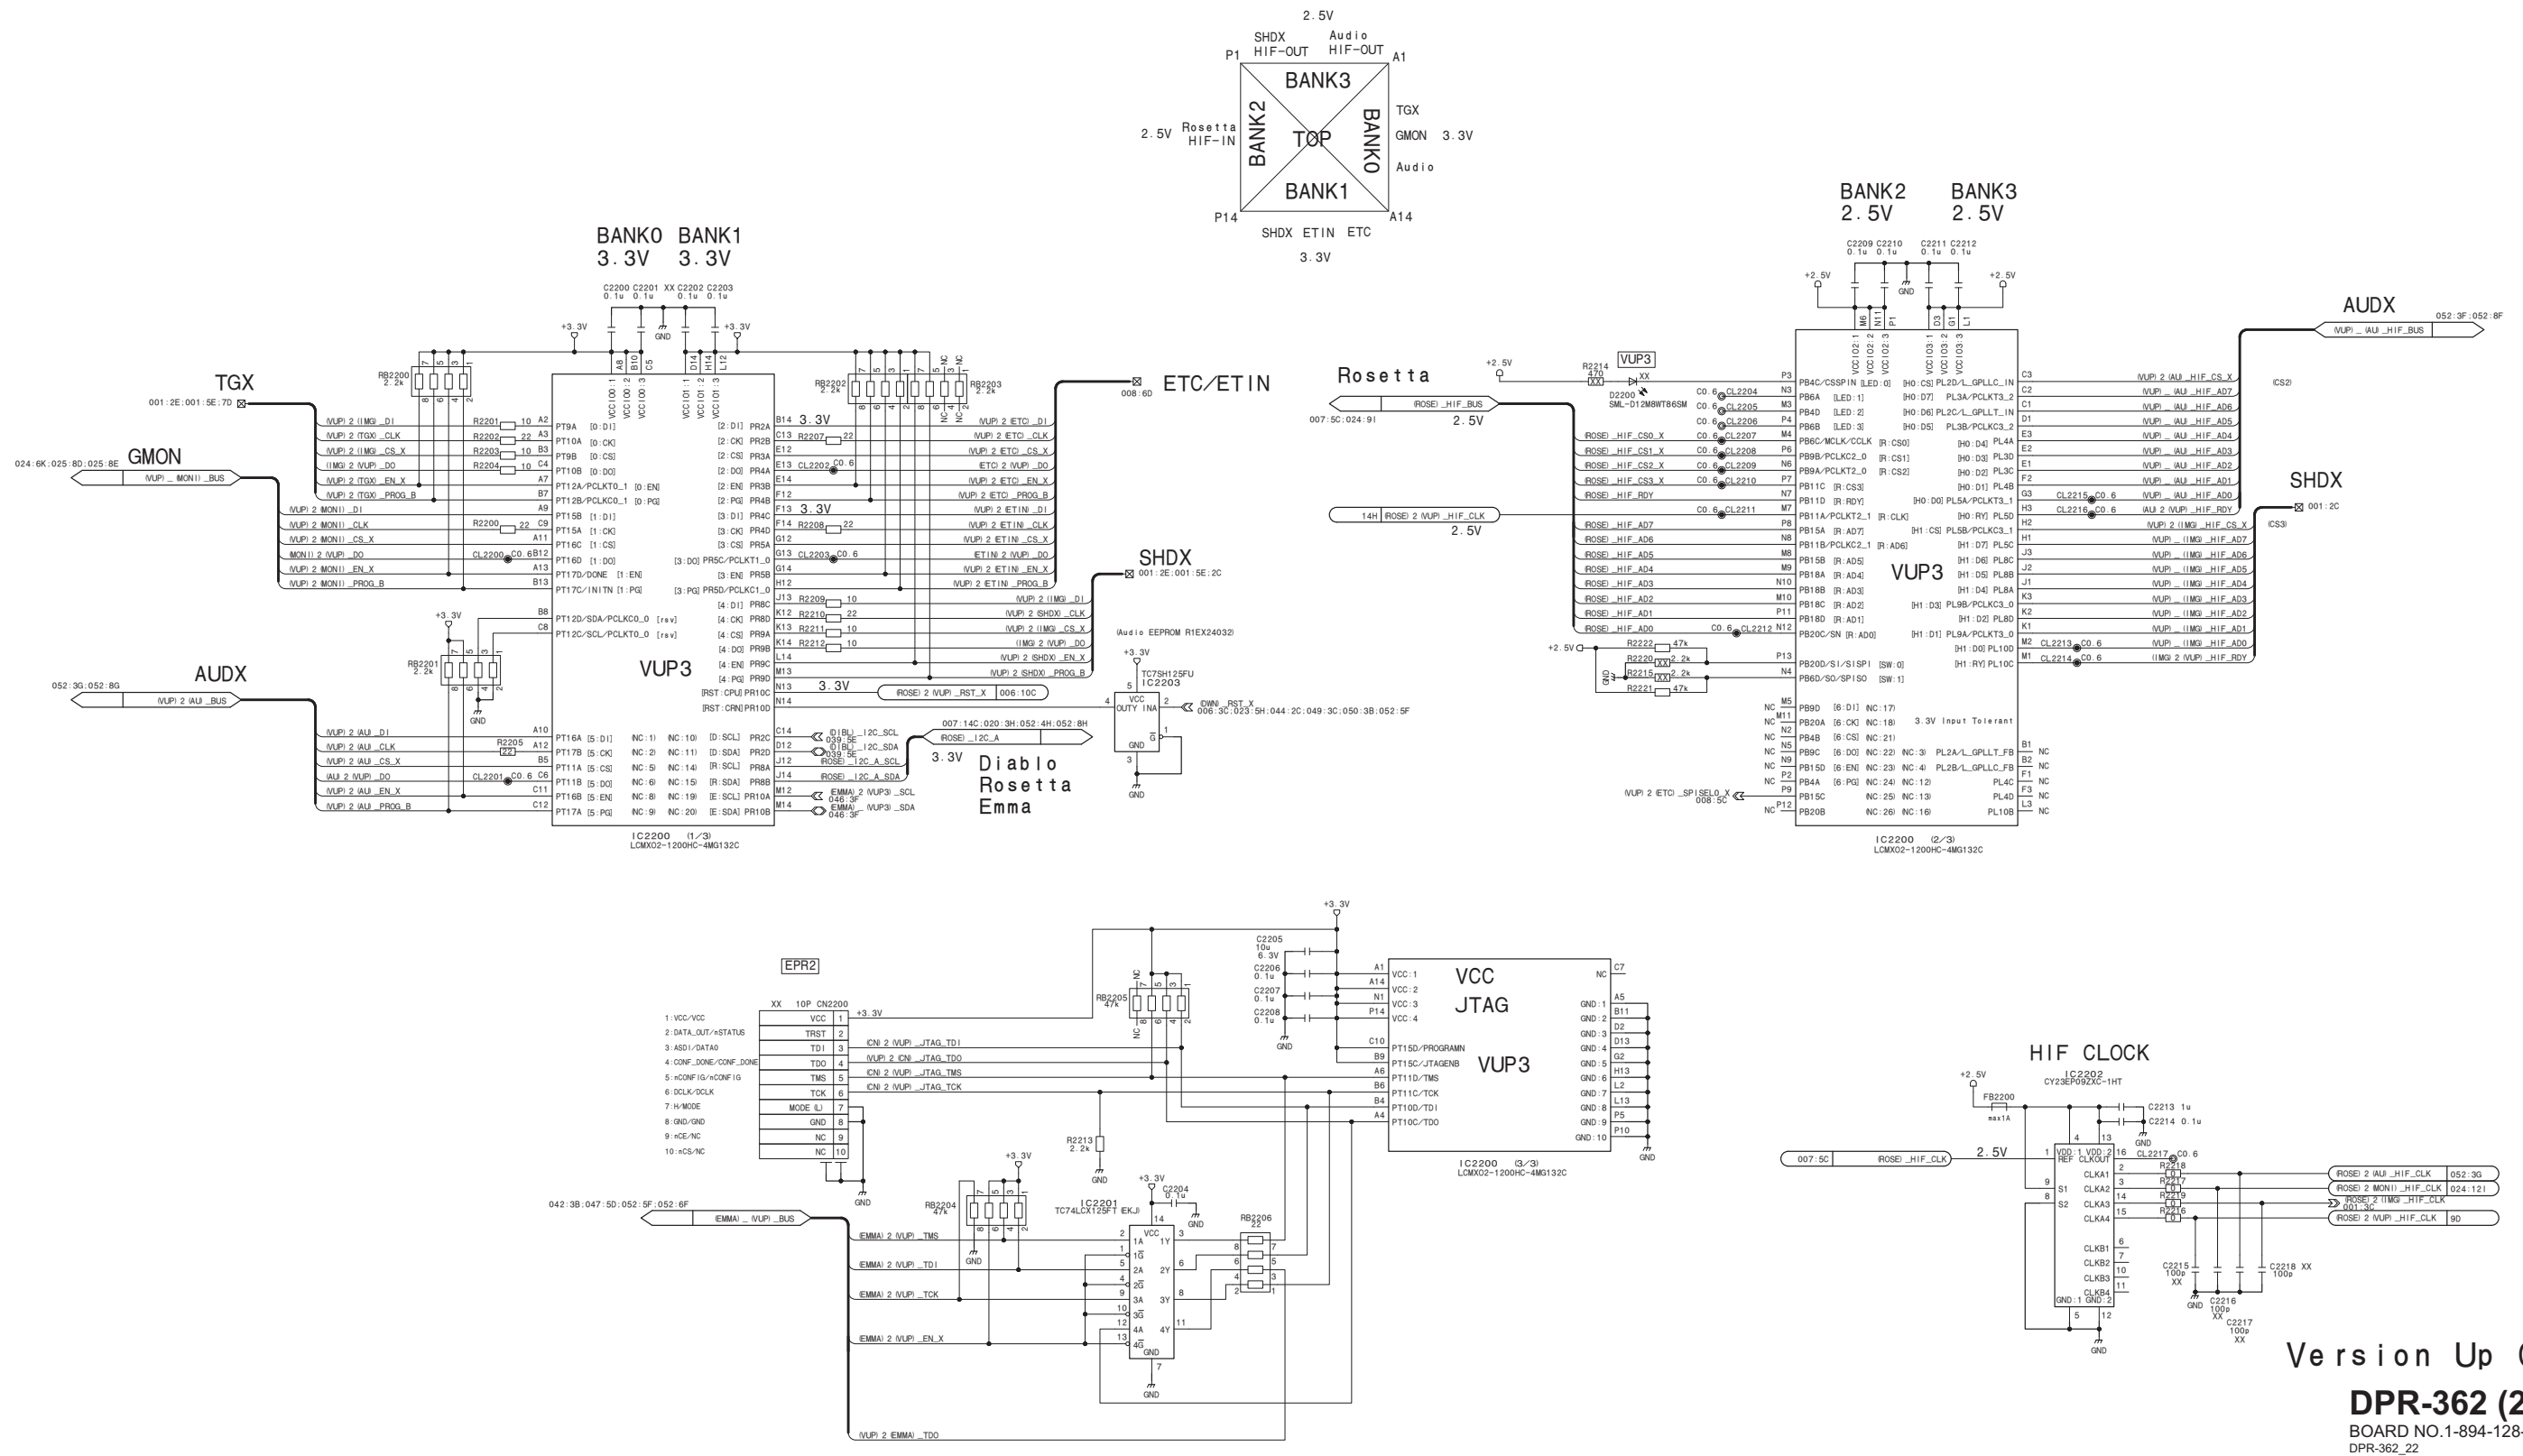



DPR-362 (23/53)

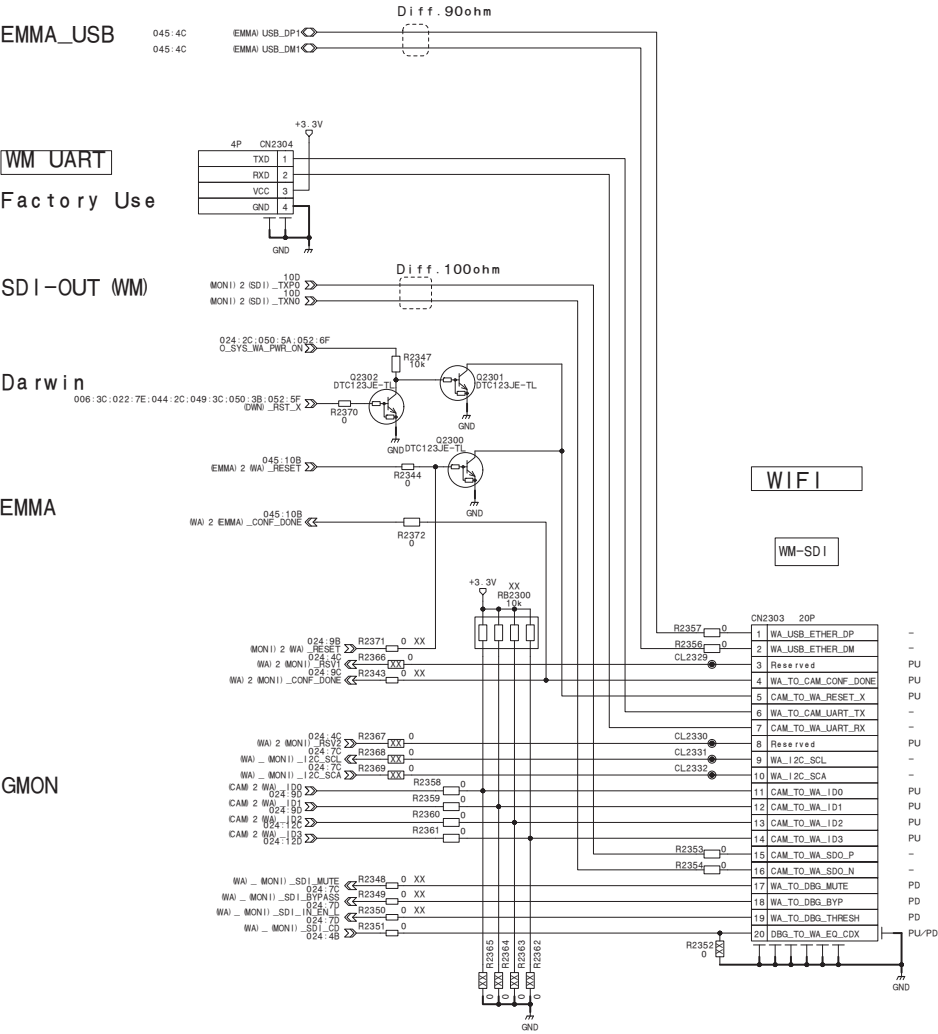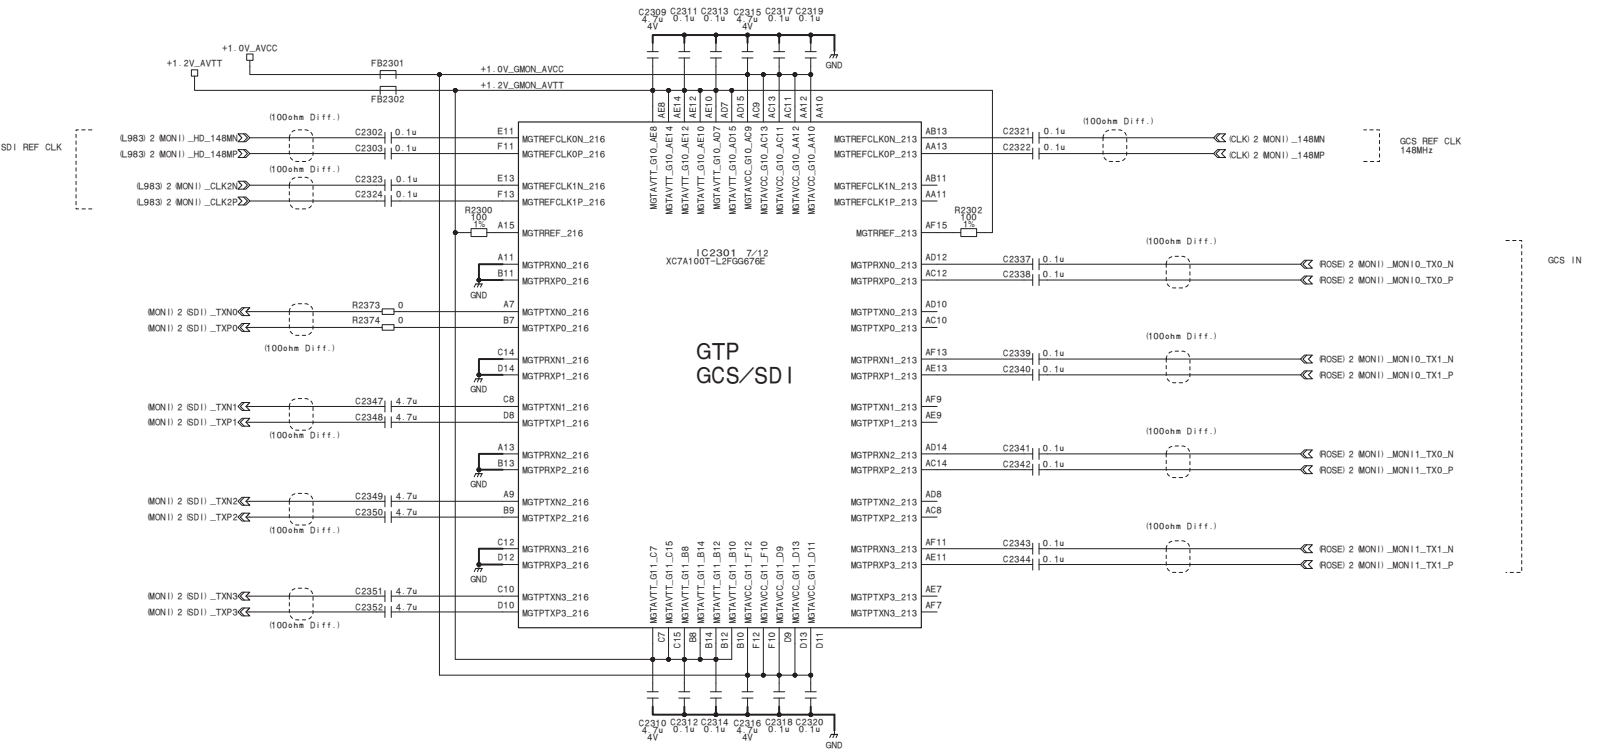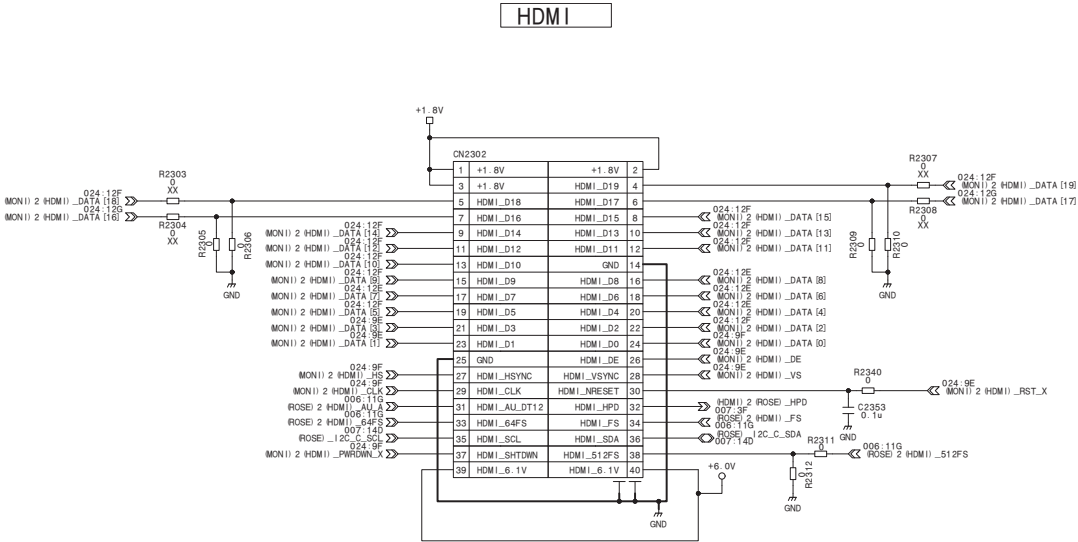


GMON GTP
(SDI/GCS I/F)
DPR-362 (23/53)
BOARD NO.1-894-128-11, 12
DPR-362_23


DPR-362 (24/53)

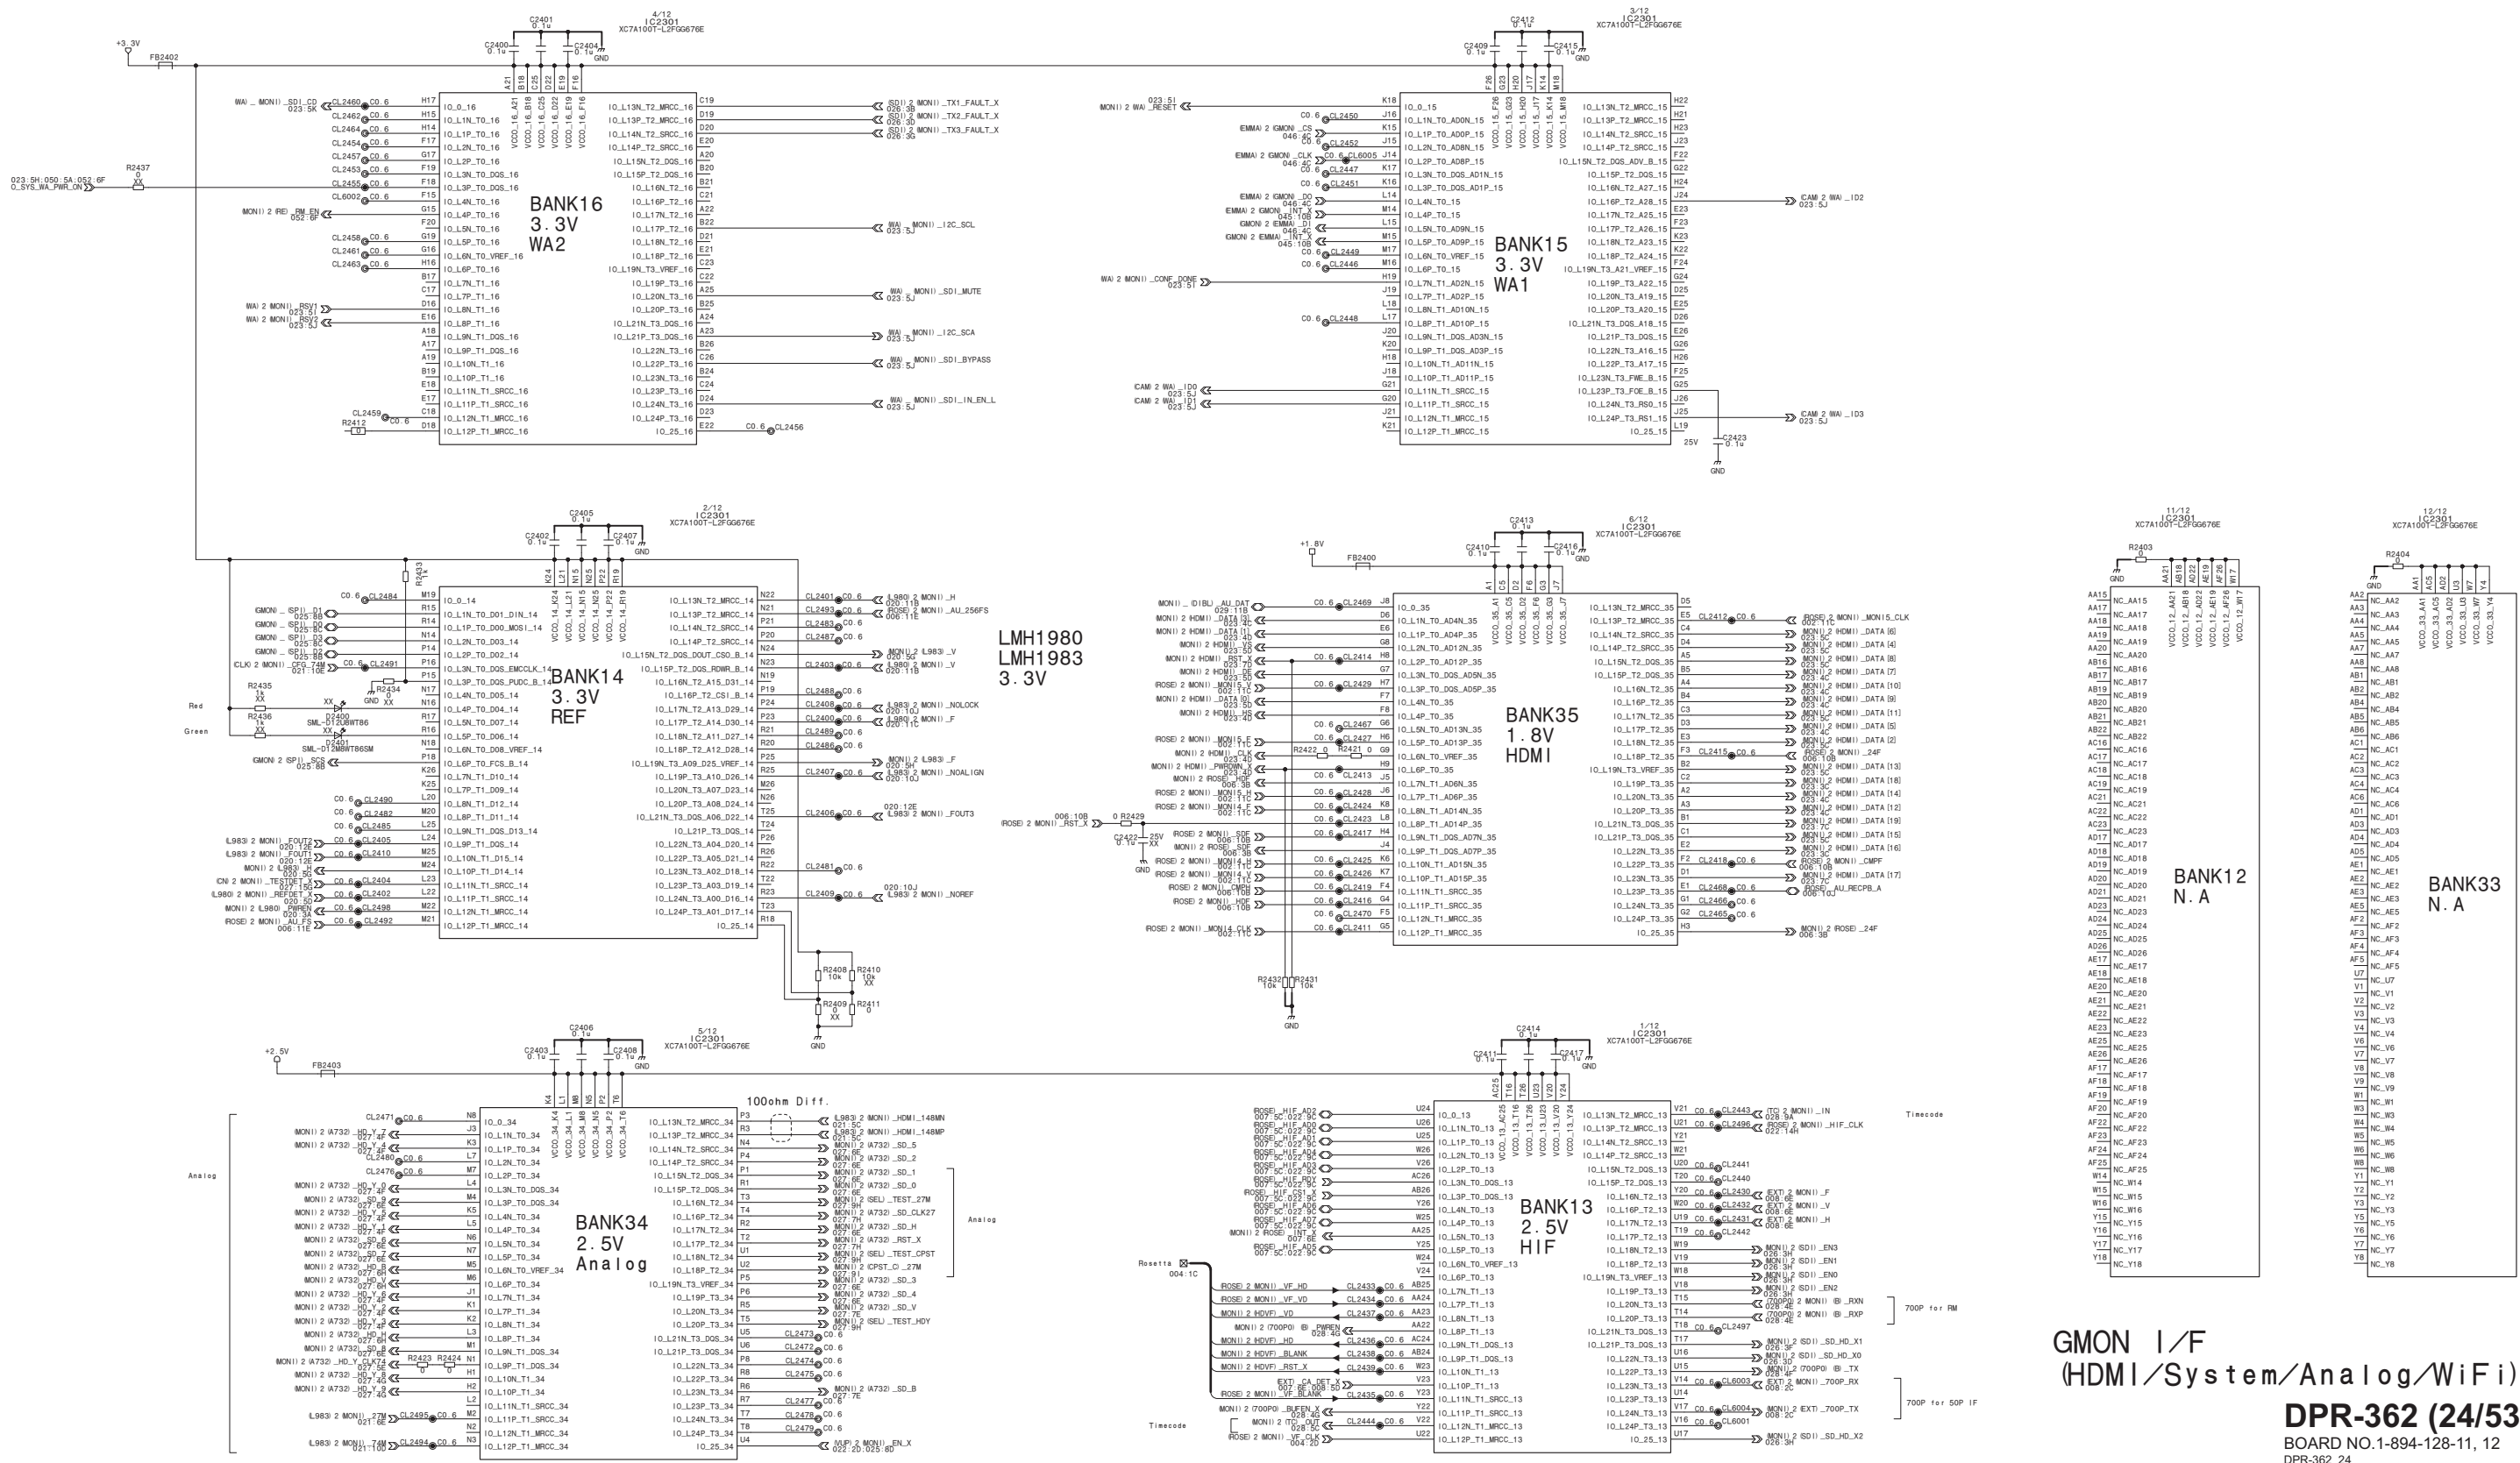


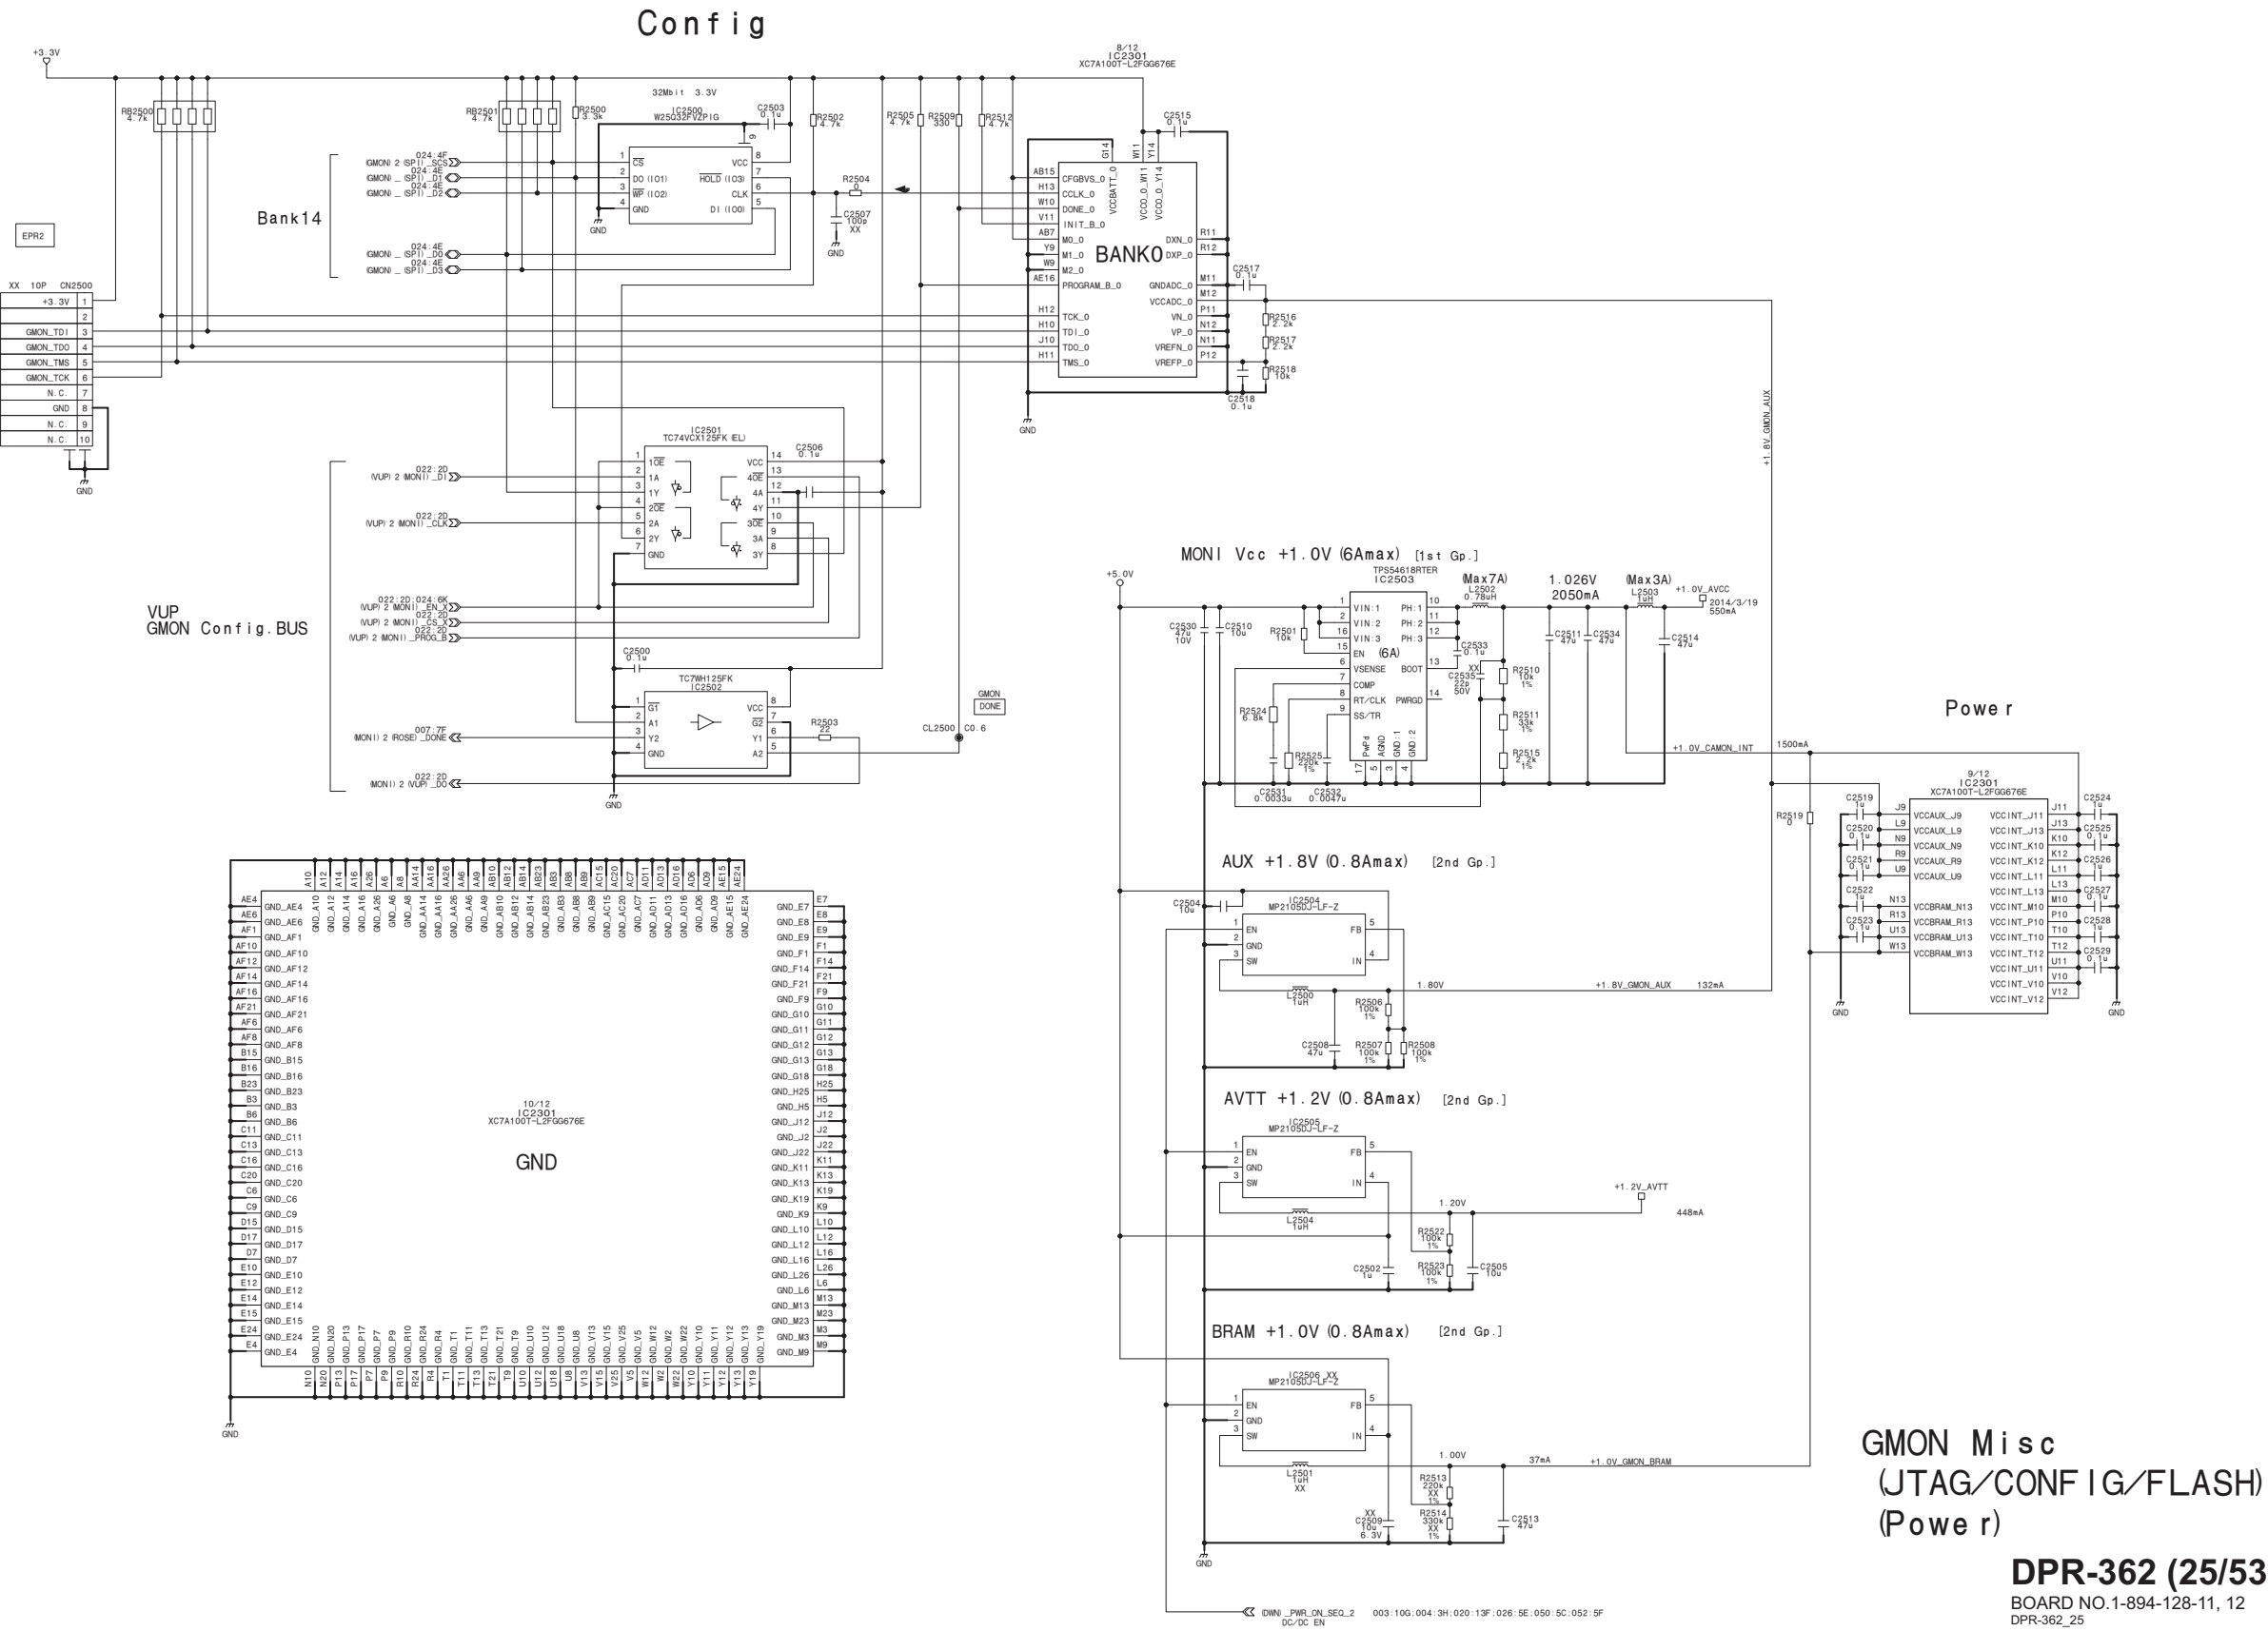

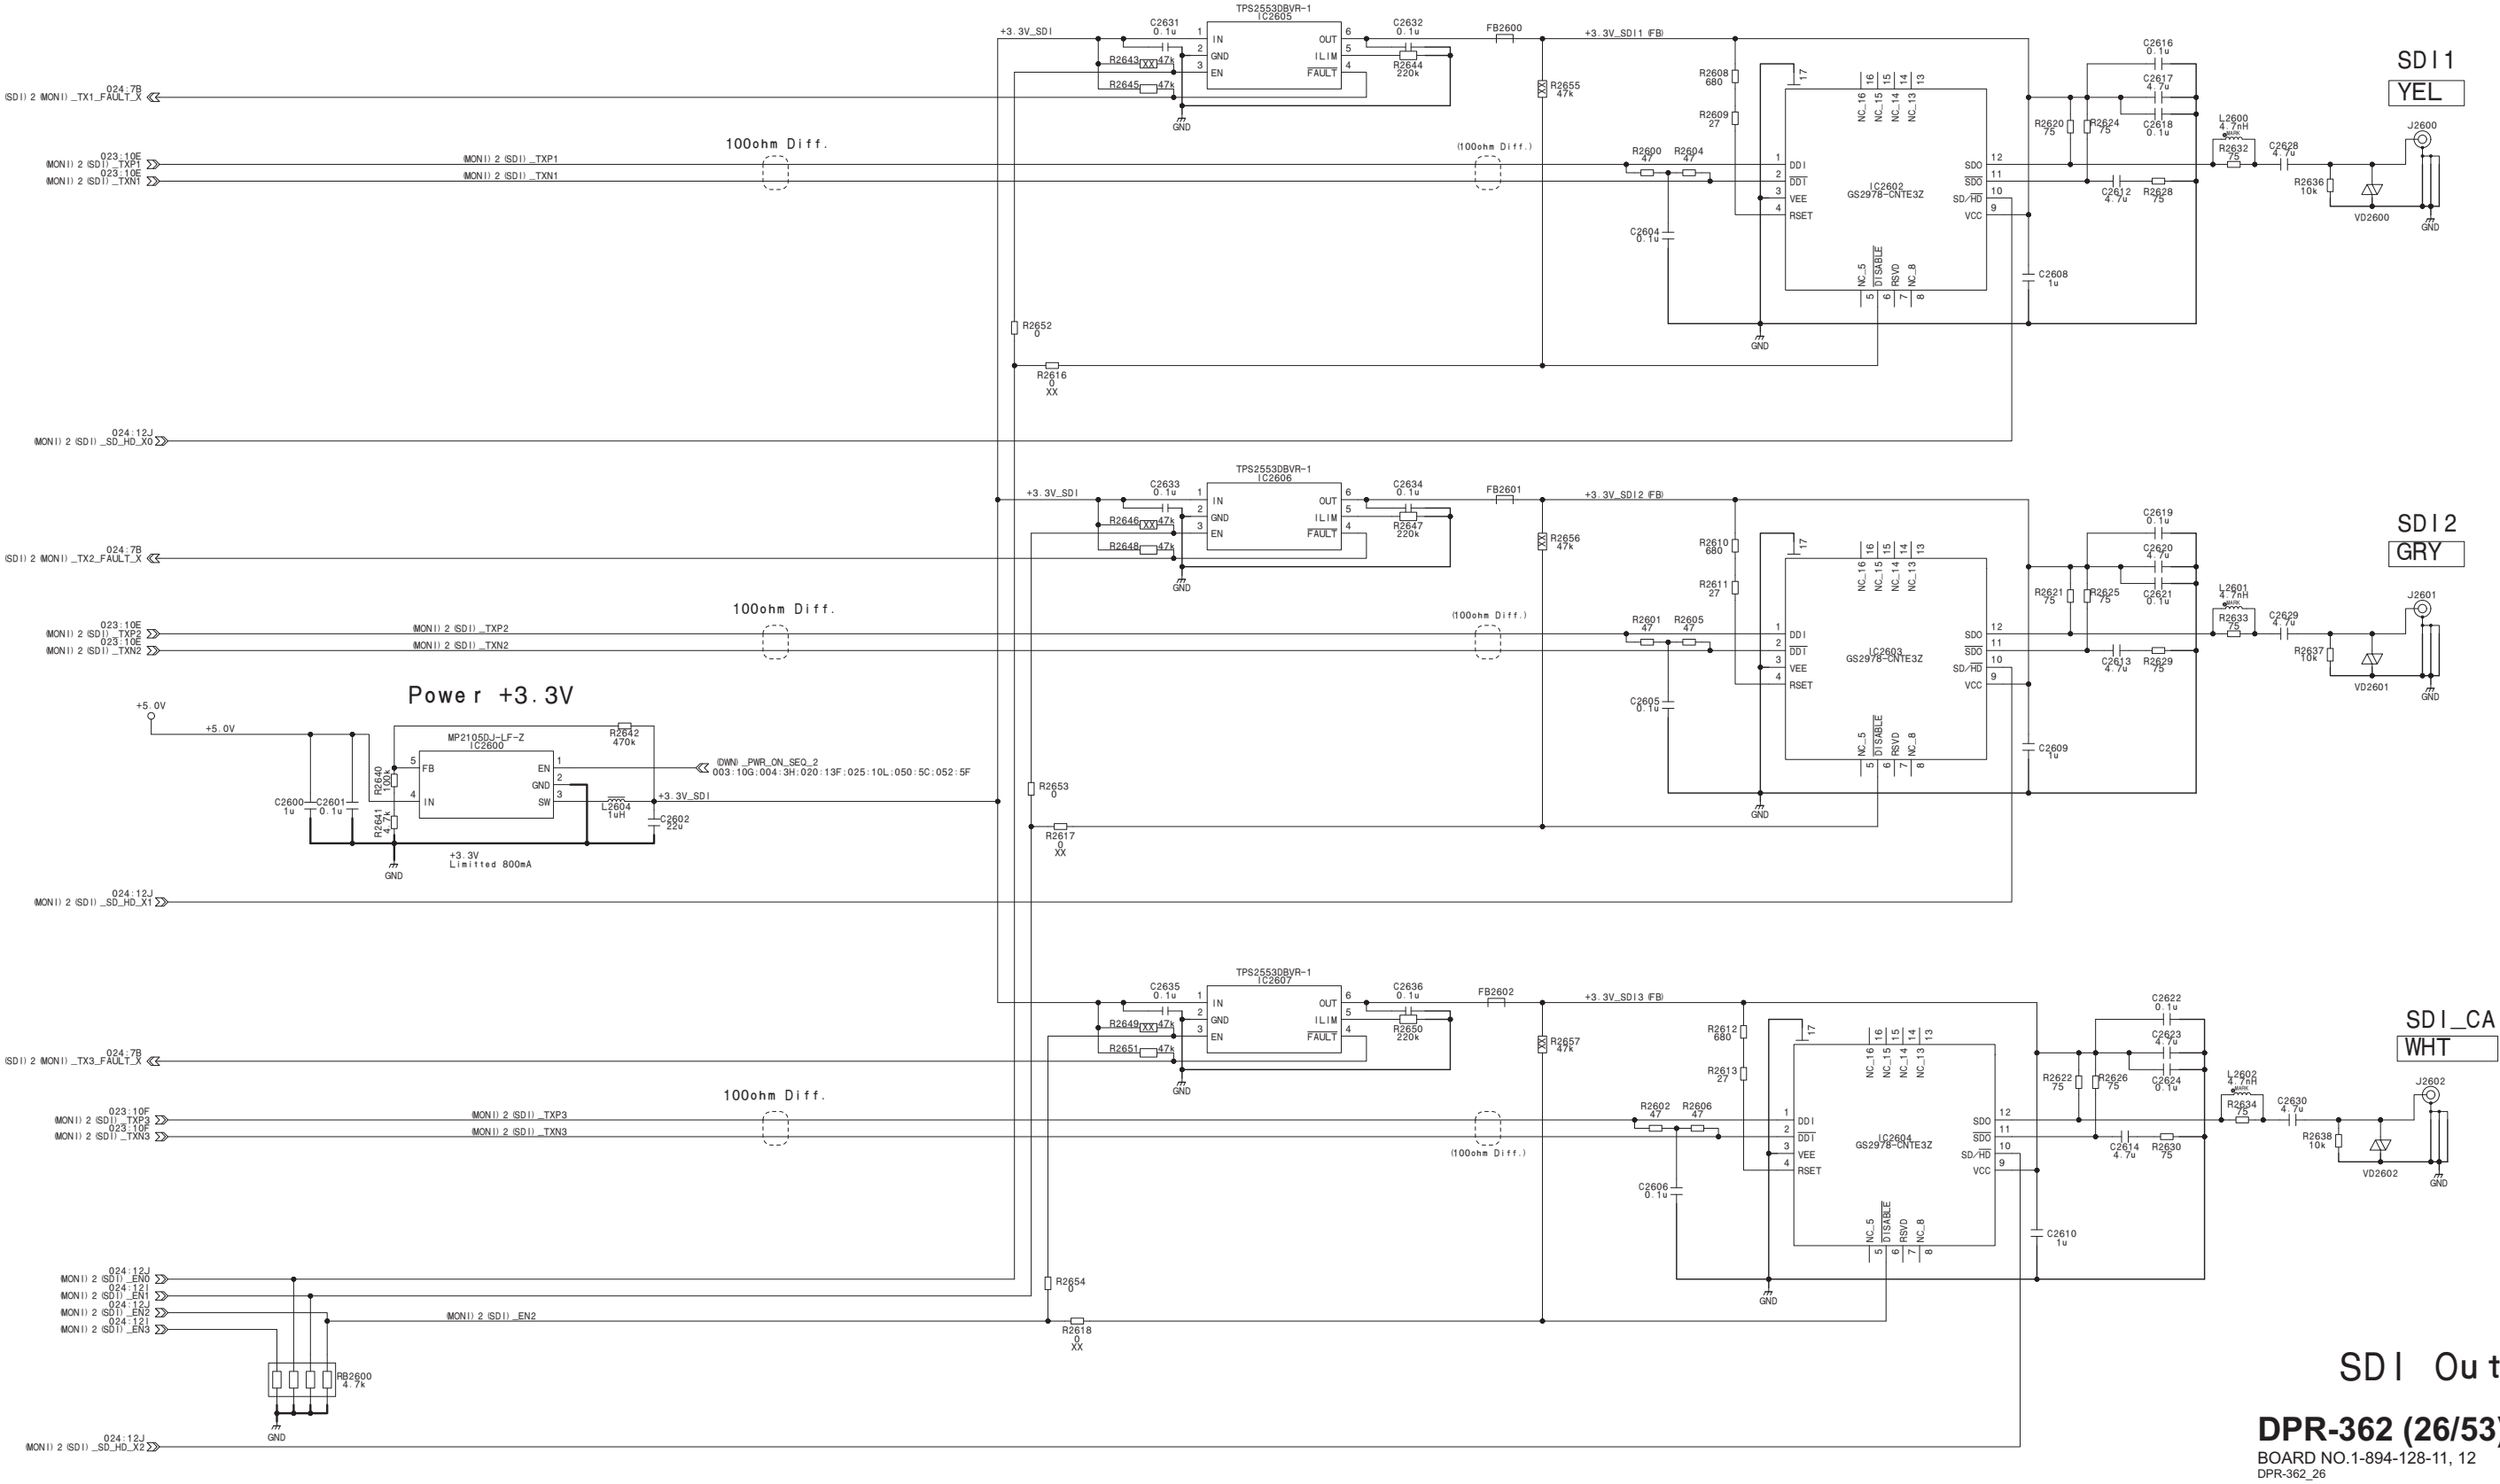


DPR-362 (27/53)

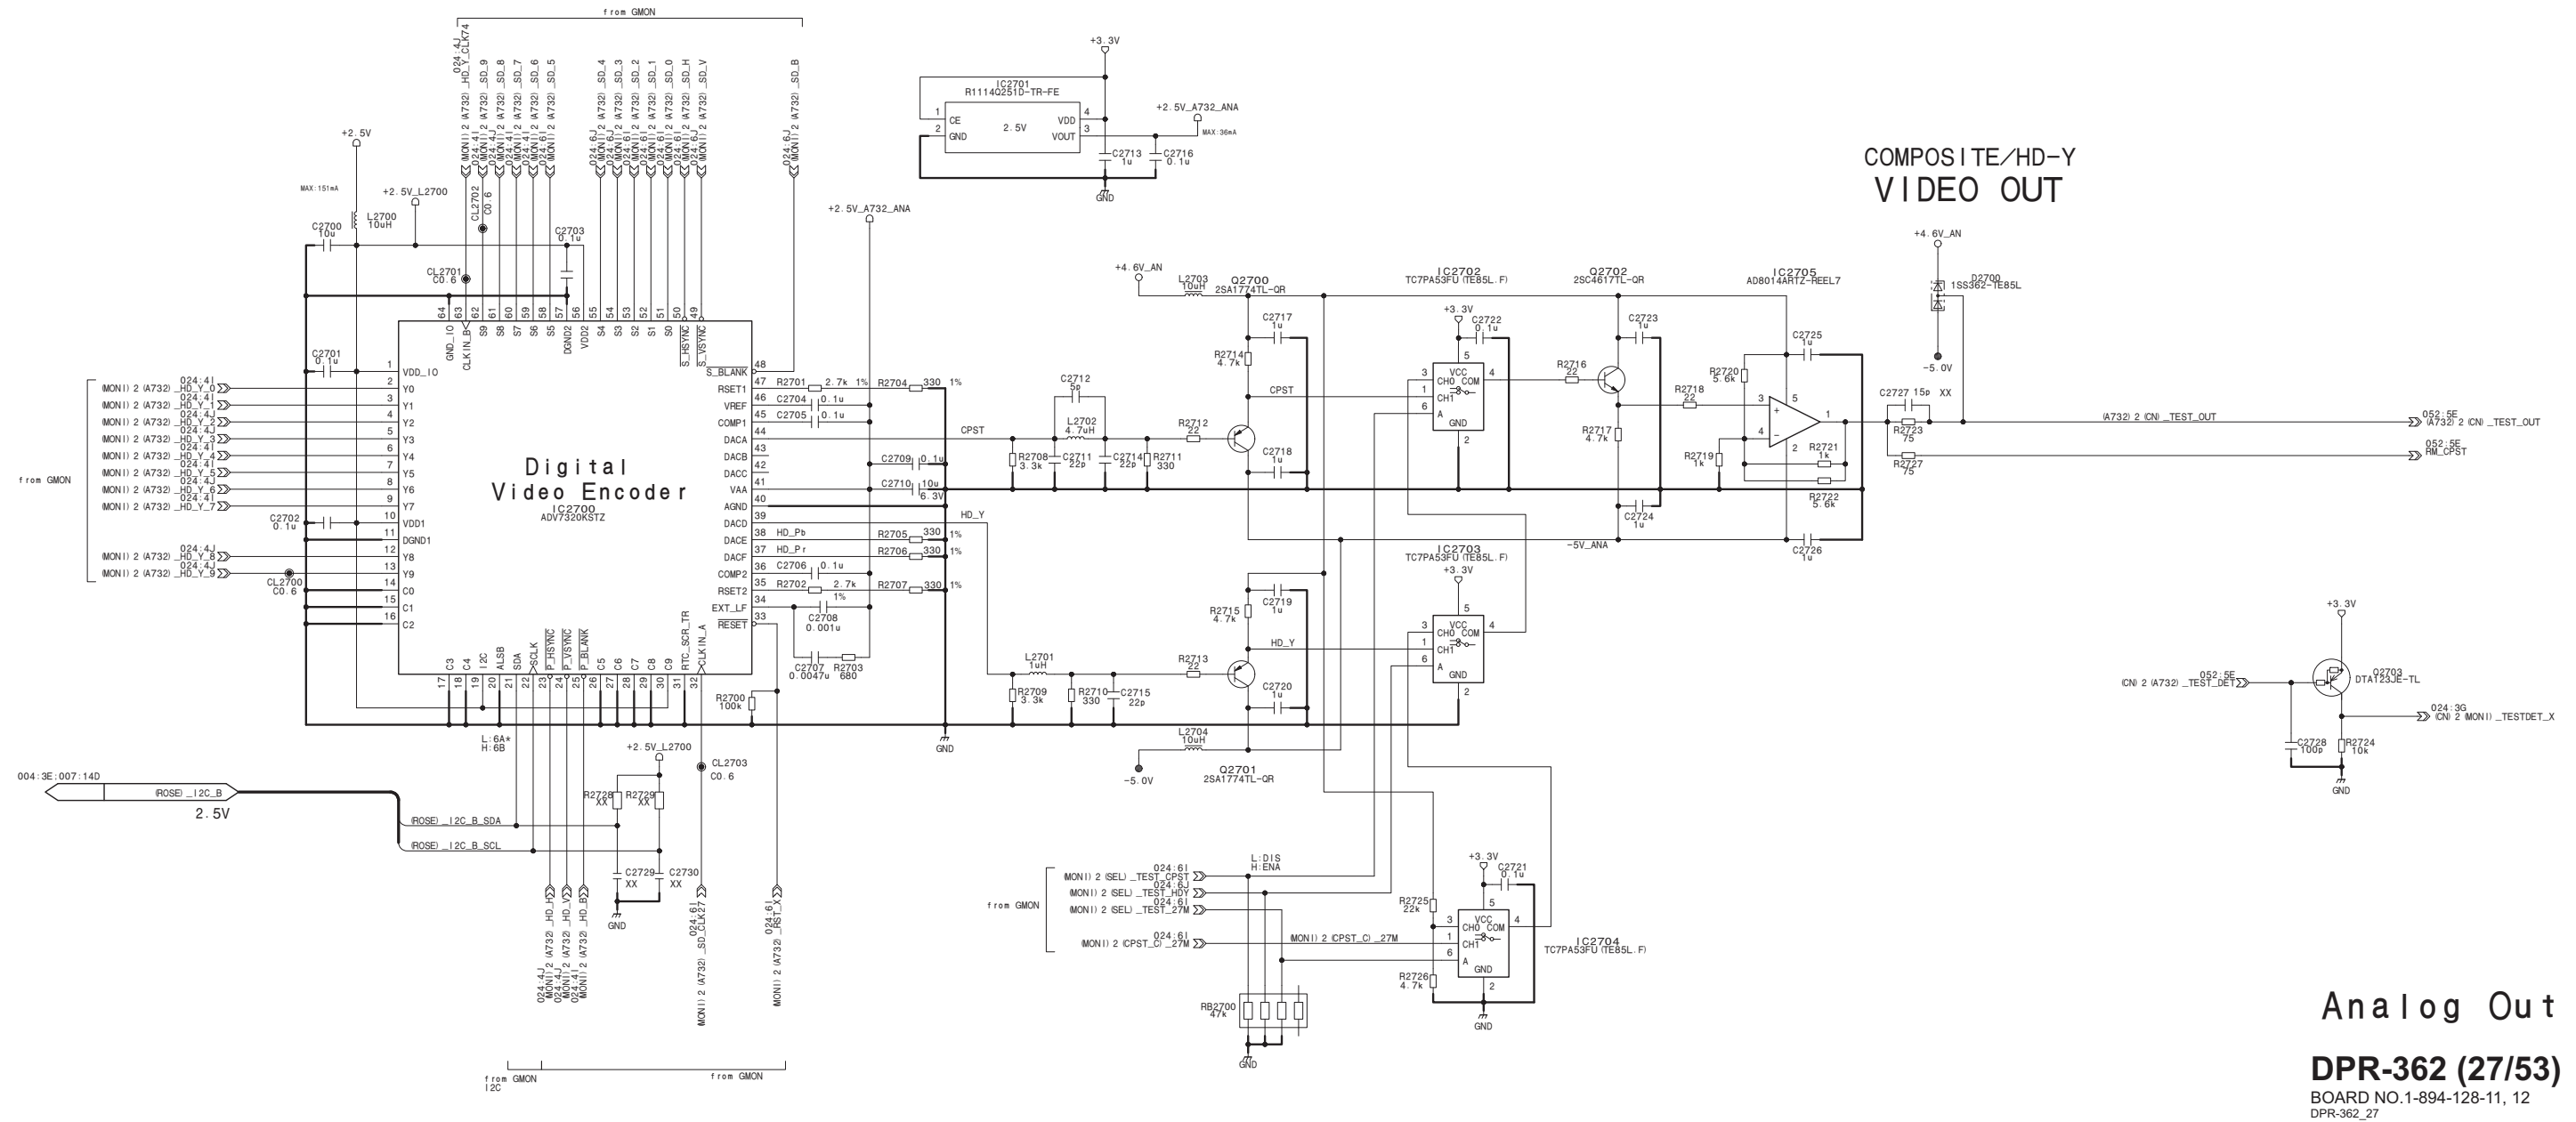


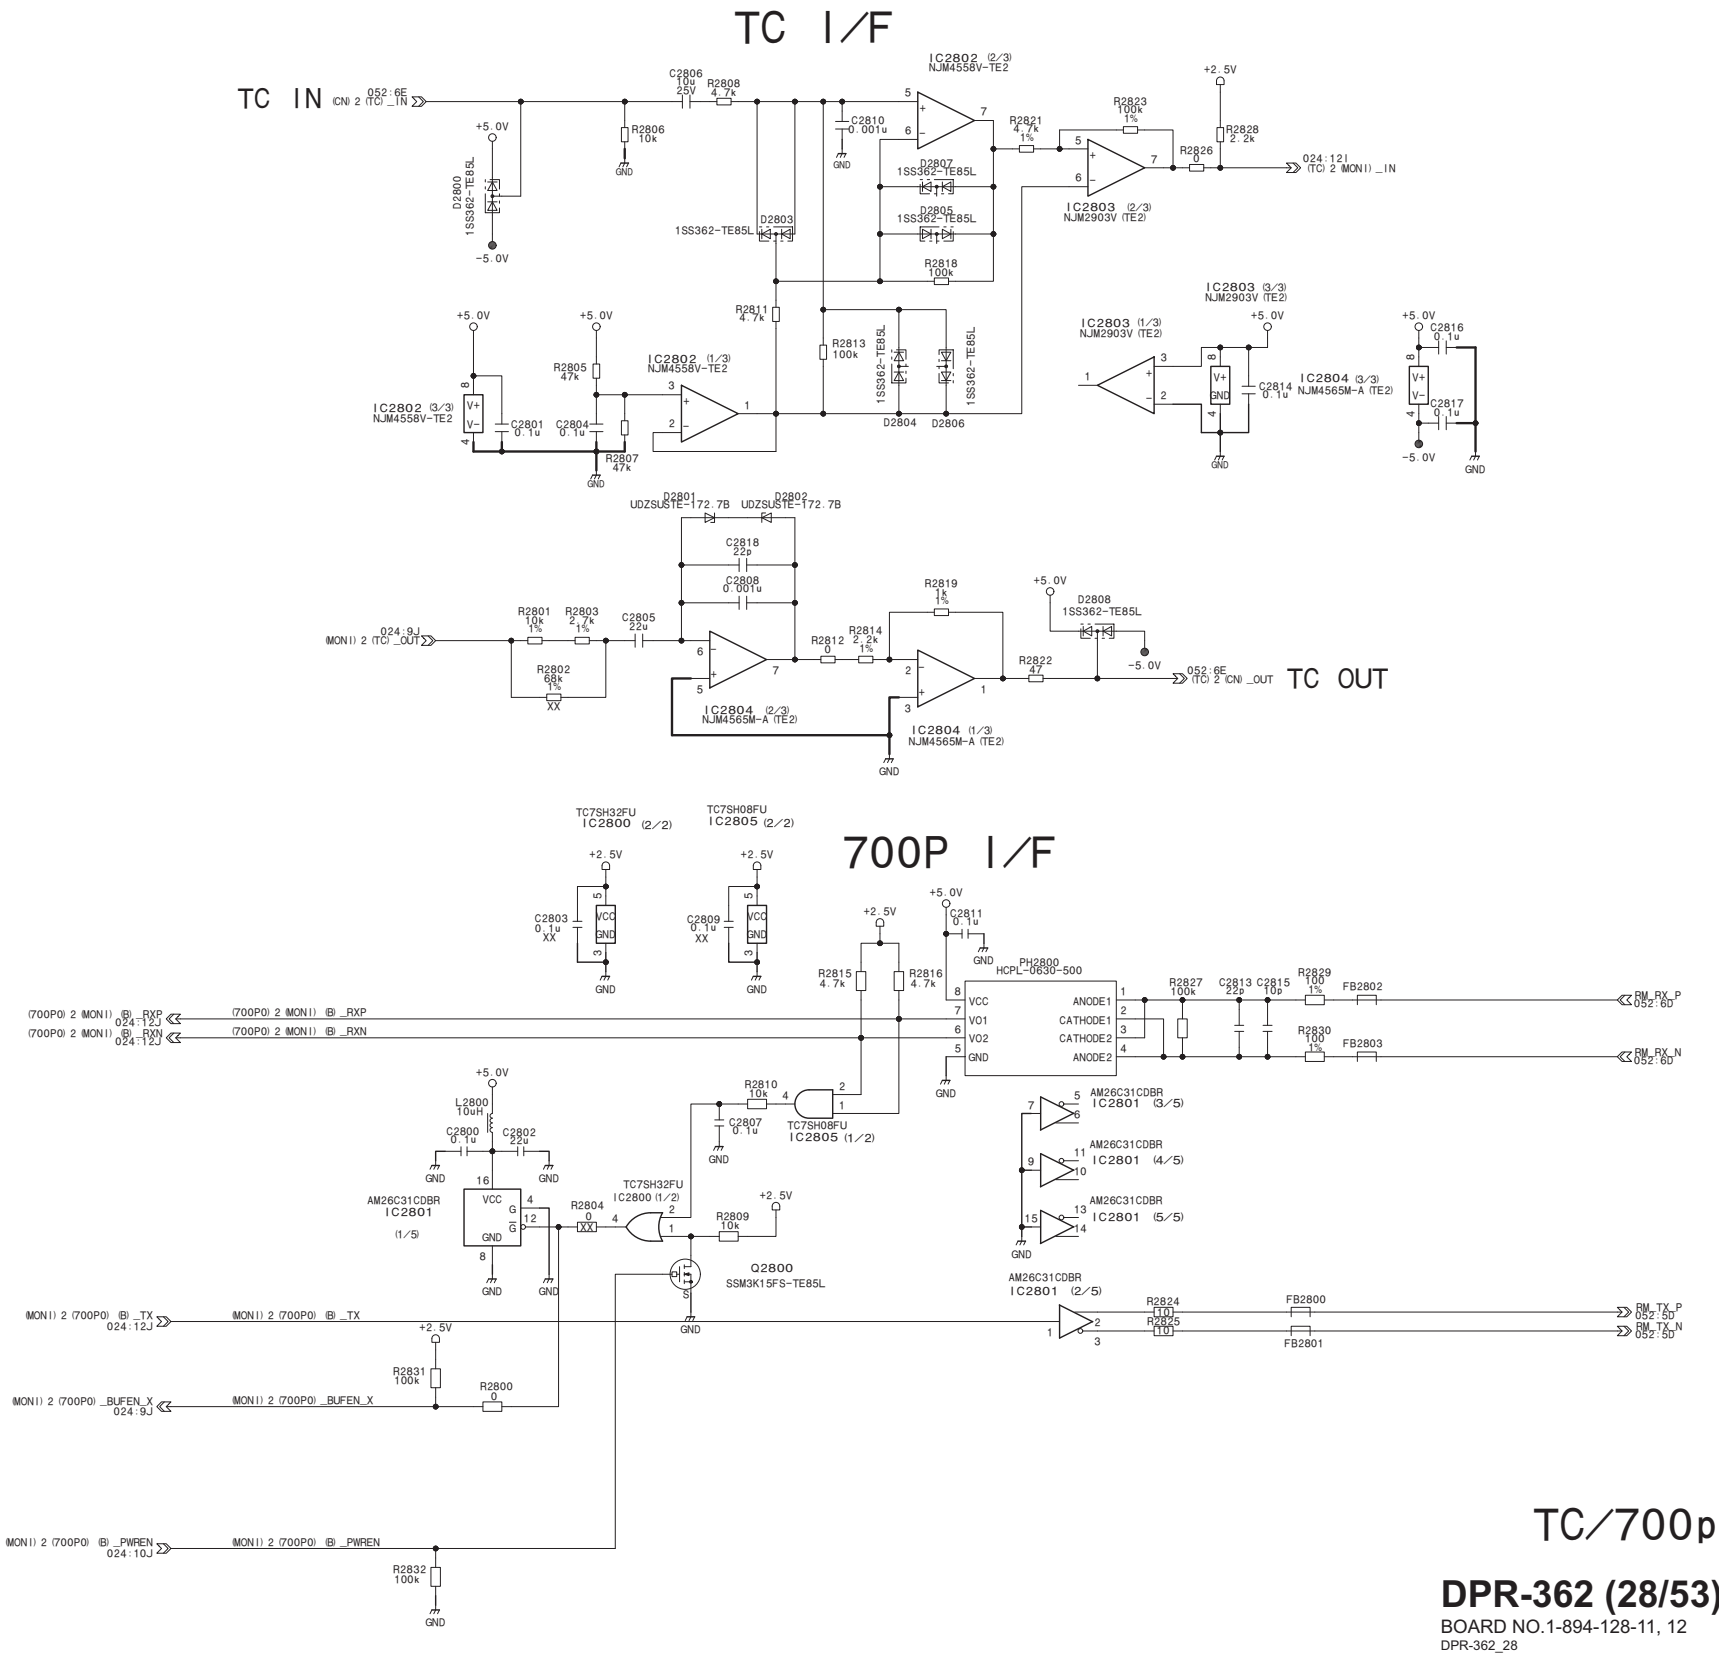

Diablo (VBS I/F)

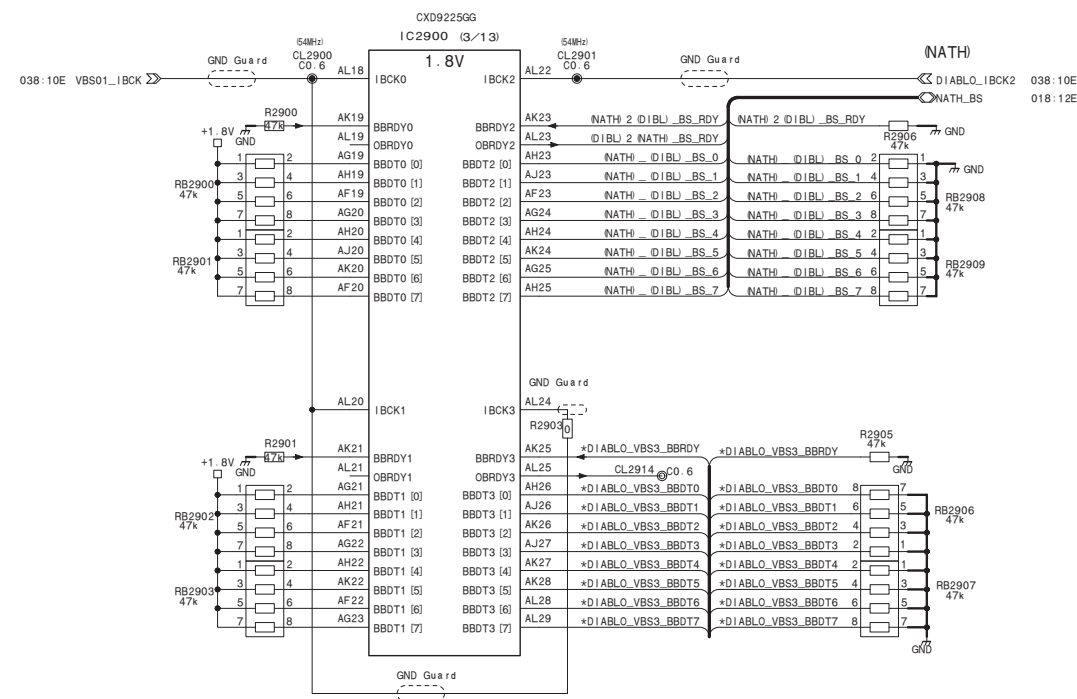



Diablo (Codec host/LPCM)

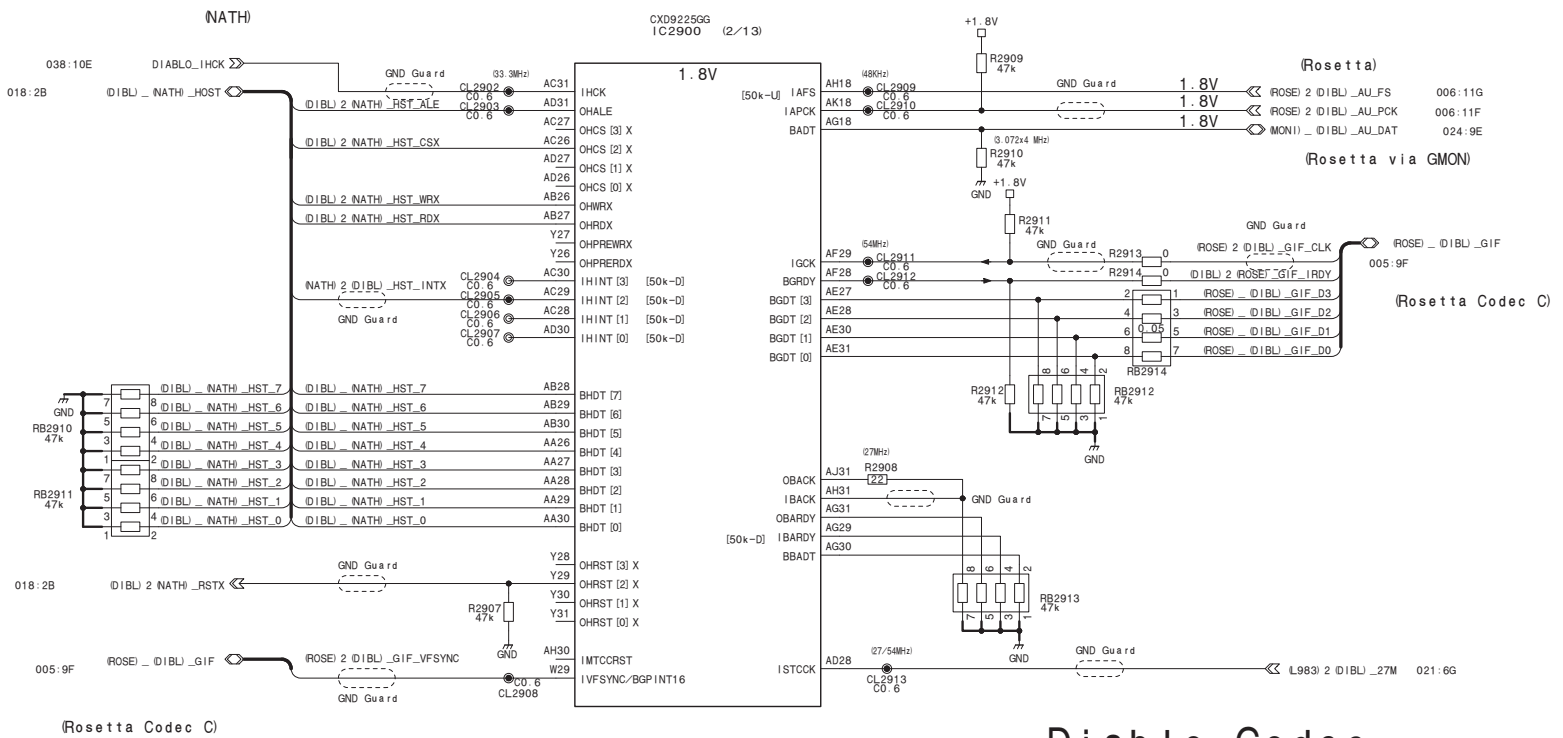Diablo Codec
(VBS/Host/LPCM/GIF)

DPR-362 (29/53)


BOARD NO.1-894-128-11, 12
DPR-362_29

DDR2 SDRAM

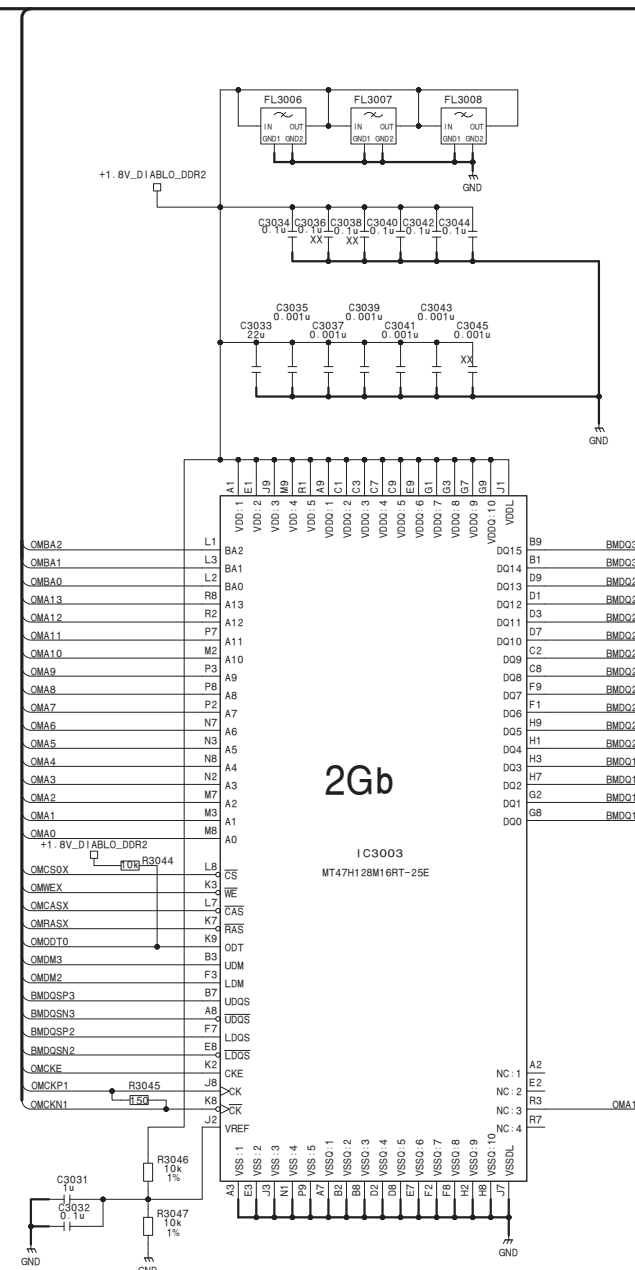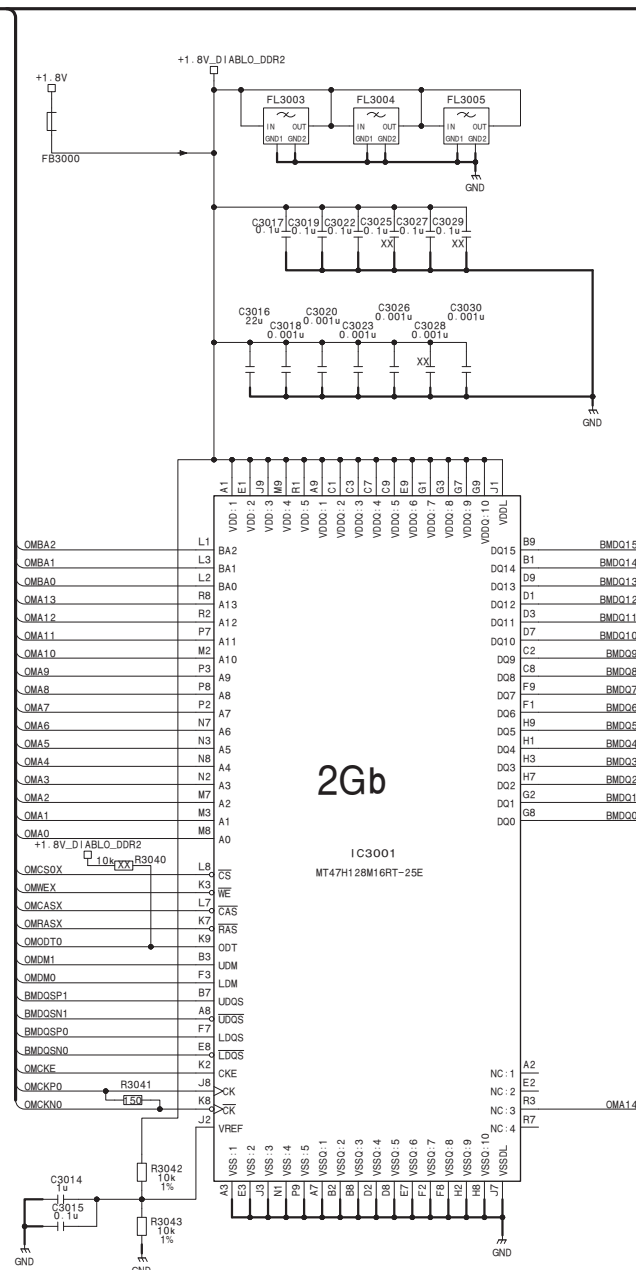

DPR-362_30

DPR-362 (31/53)

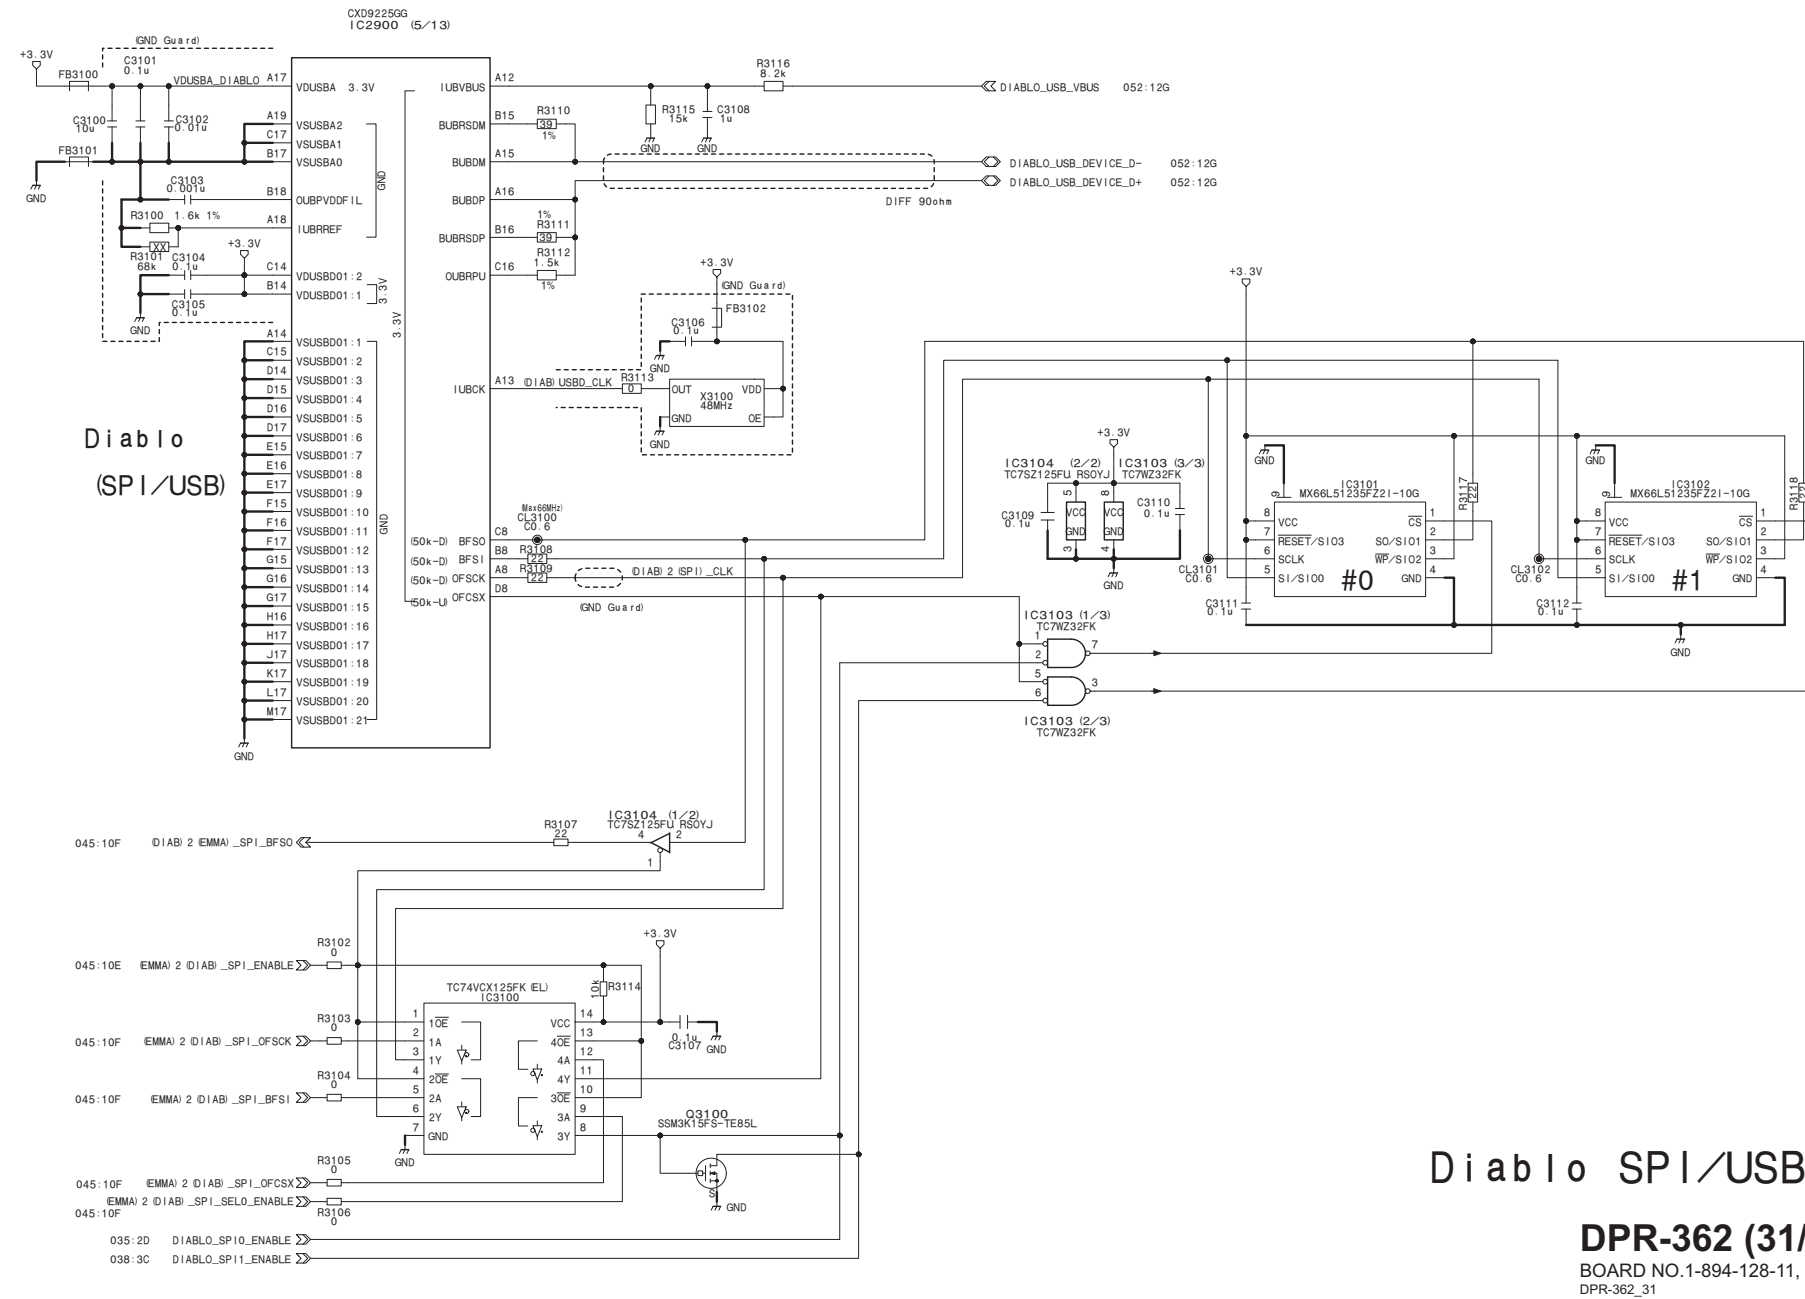

Diablo SPI/USB-D

DPR-362 (31/53)


BOARD NO.1-894-128-11, 12
DPR-362_31

2-54




BOARD NO.1-894-128-11, 12
PR-362_32

USB Host Controller

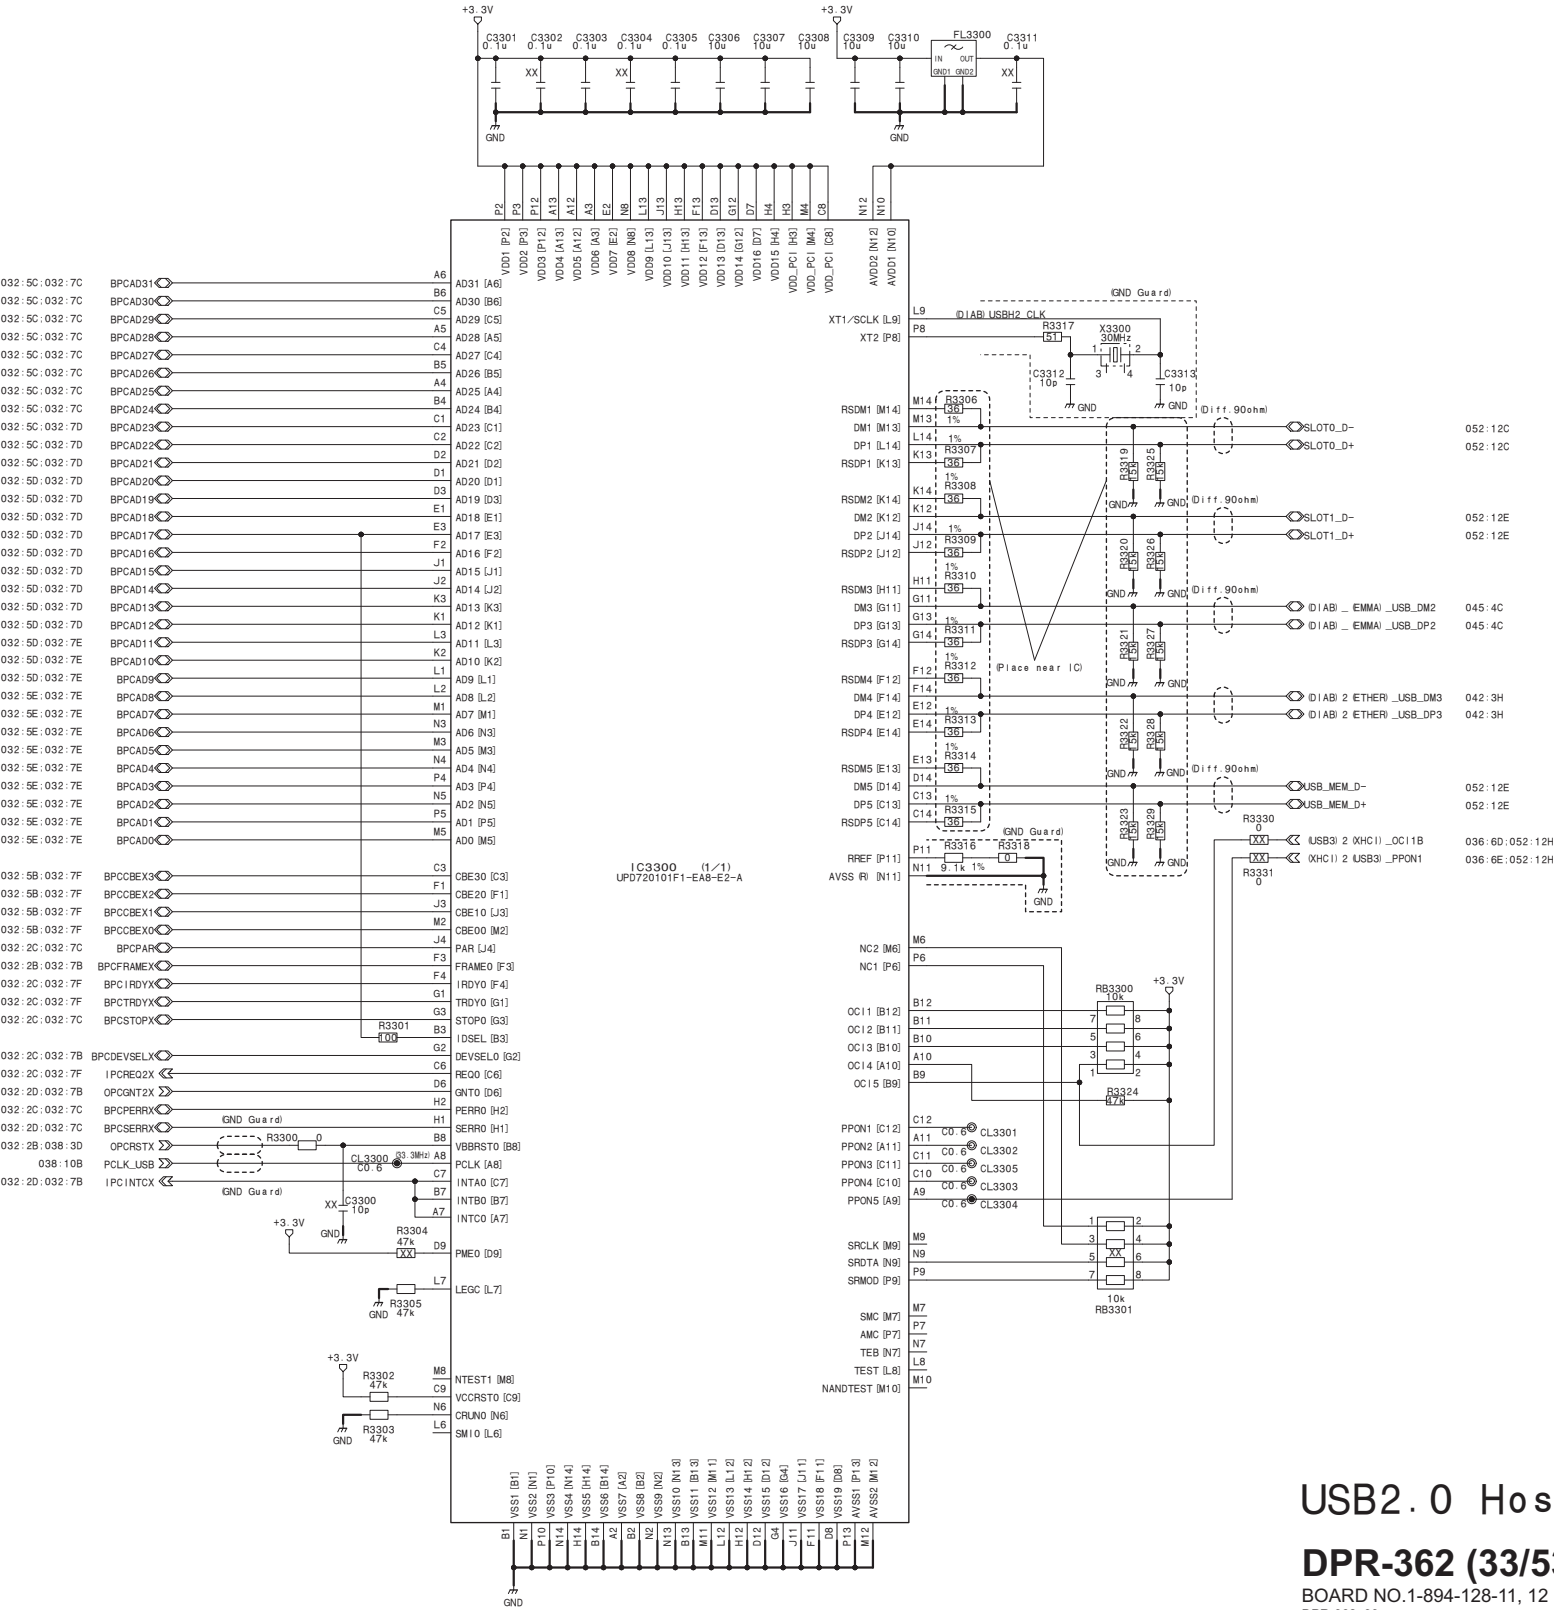



DPR-362 (34/53)

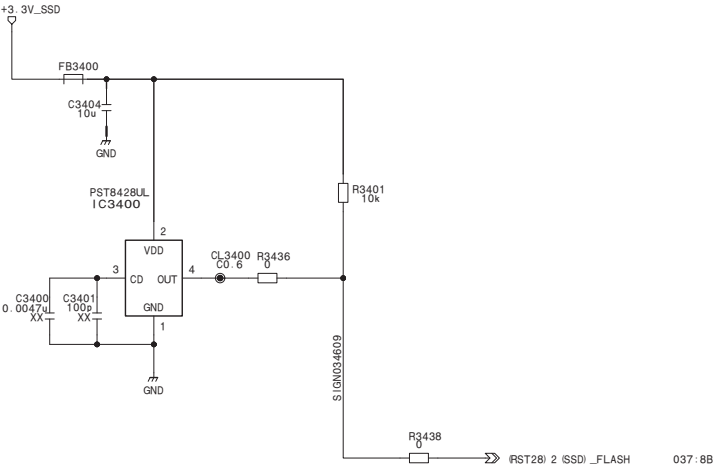

DPR-362 (34/53)


BOARD NO.1-894-128-11, 12
DPR-362_34

CXD9225GG
IC2900 (8/13)

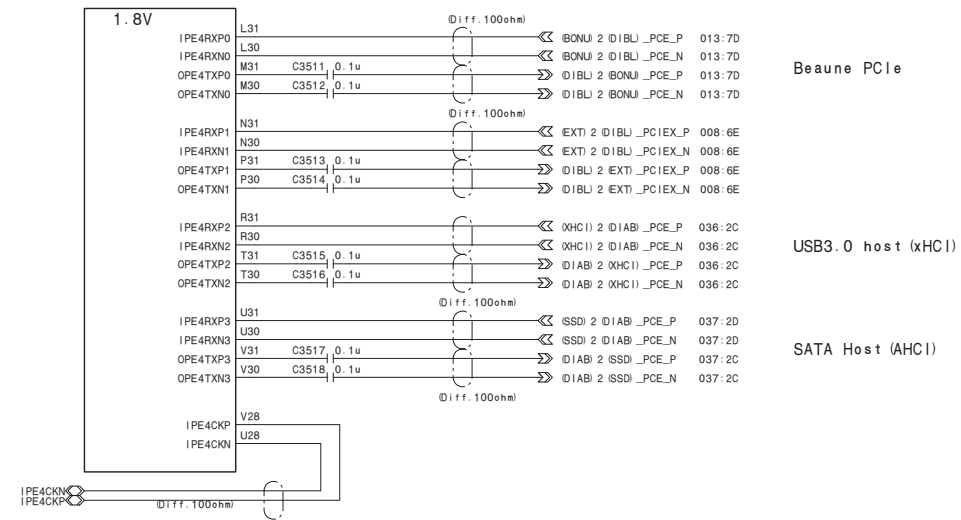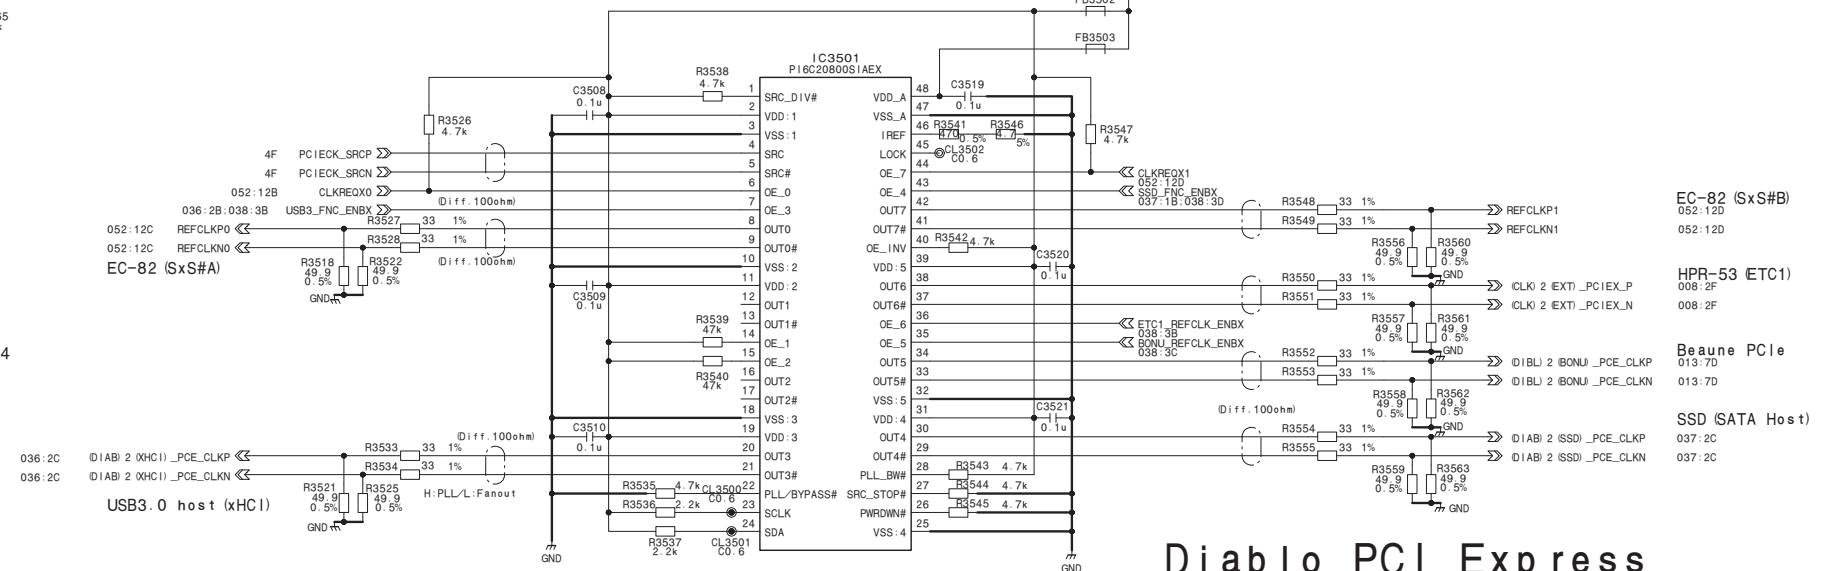Diablo PCI Express
(SxS, x4, Clock Gen./Buff.)

BOARD NO.1-894-128-11, 12
DPR-362_35

DPR-362 (36/53)

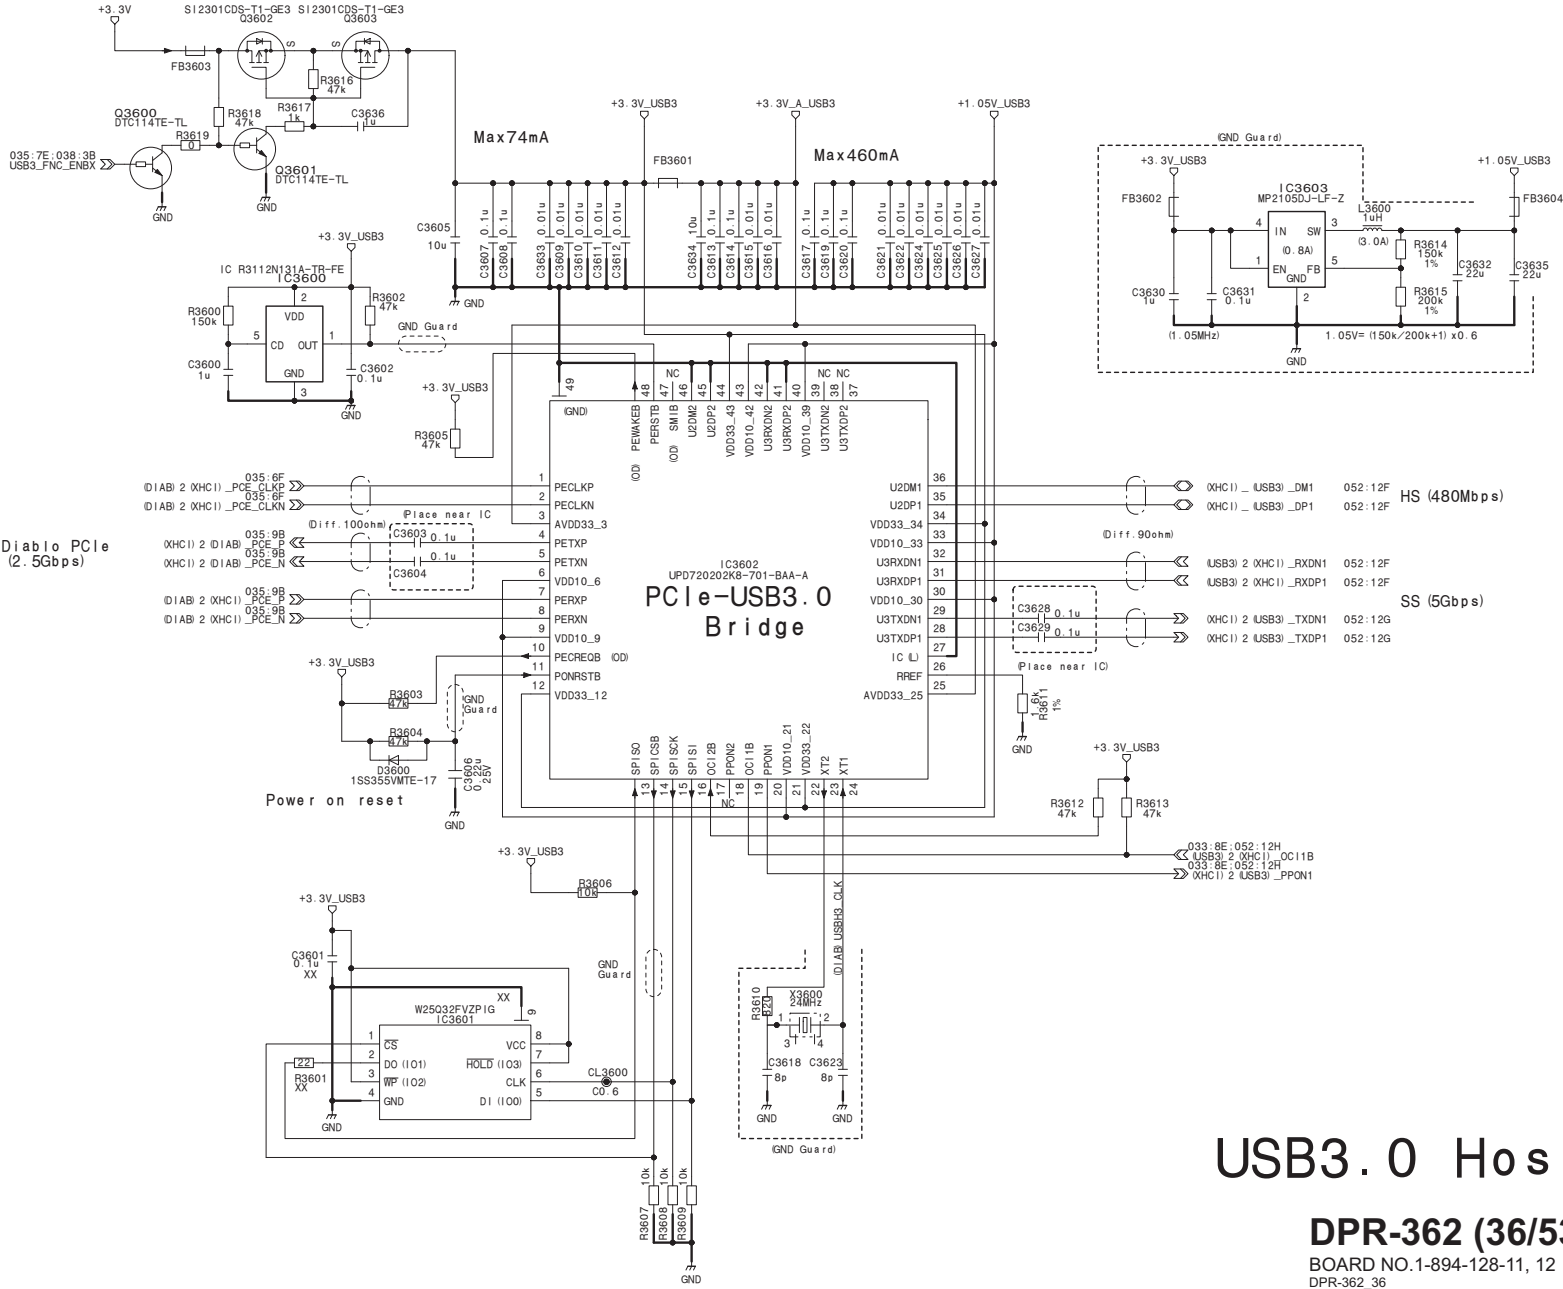


USB3.0 Host

DPR-362 (36/53)

BOARD NO.1-894-128-11, 12

DPR-362_36

DPR-362 (37/53)

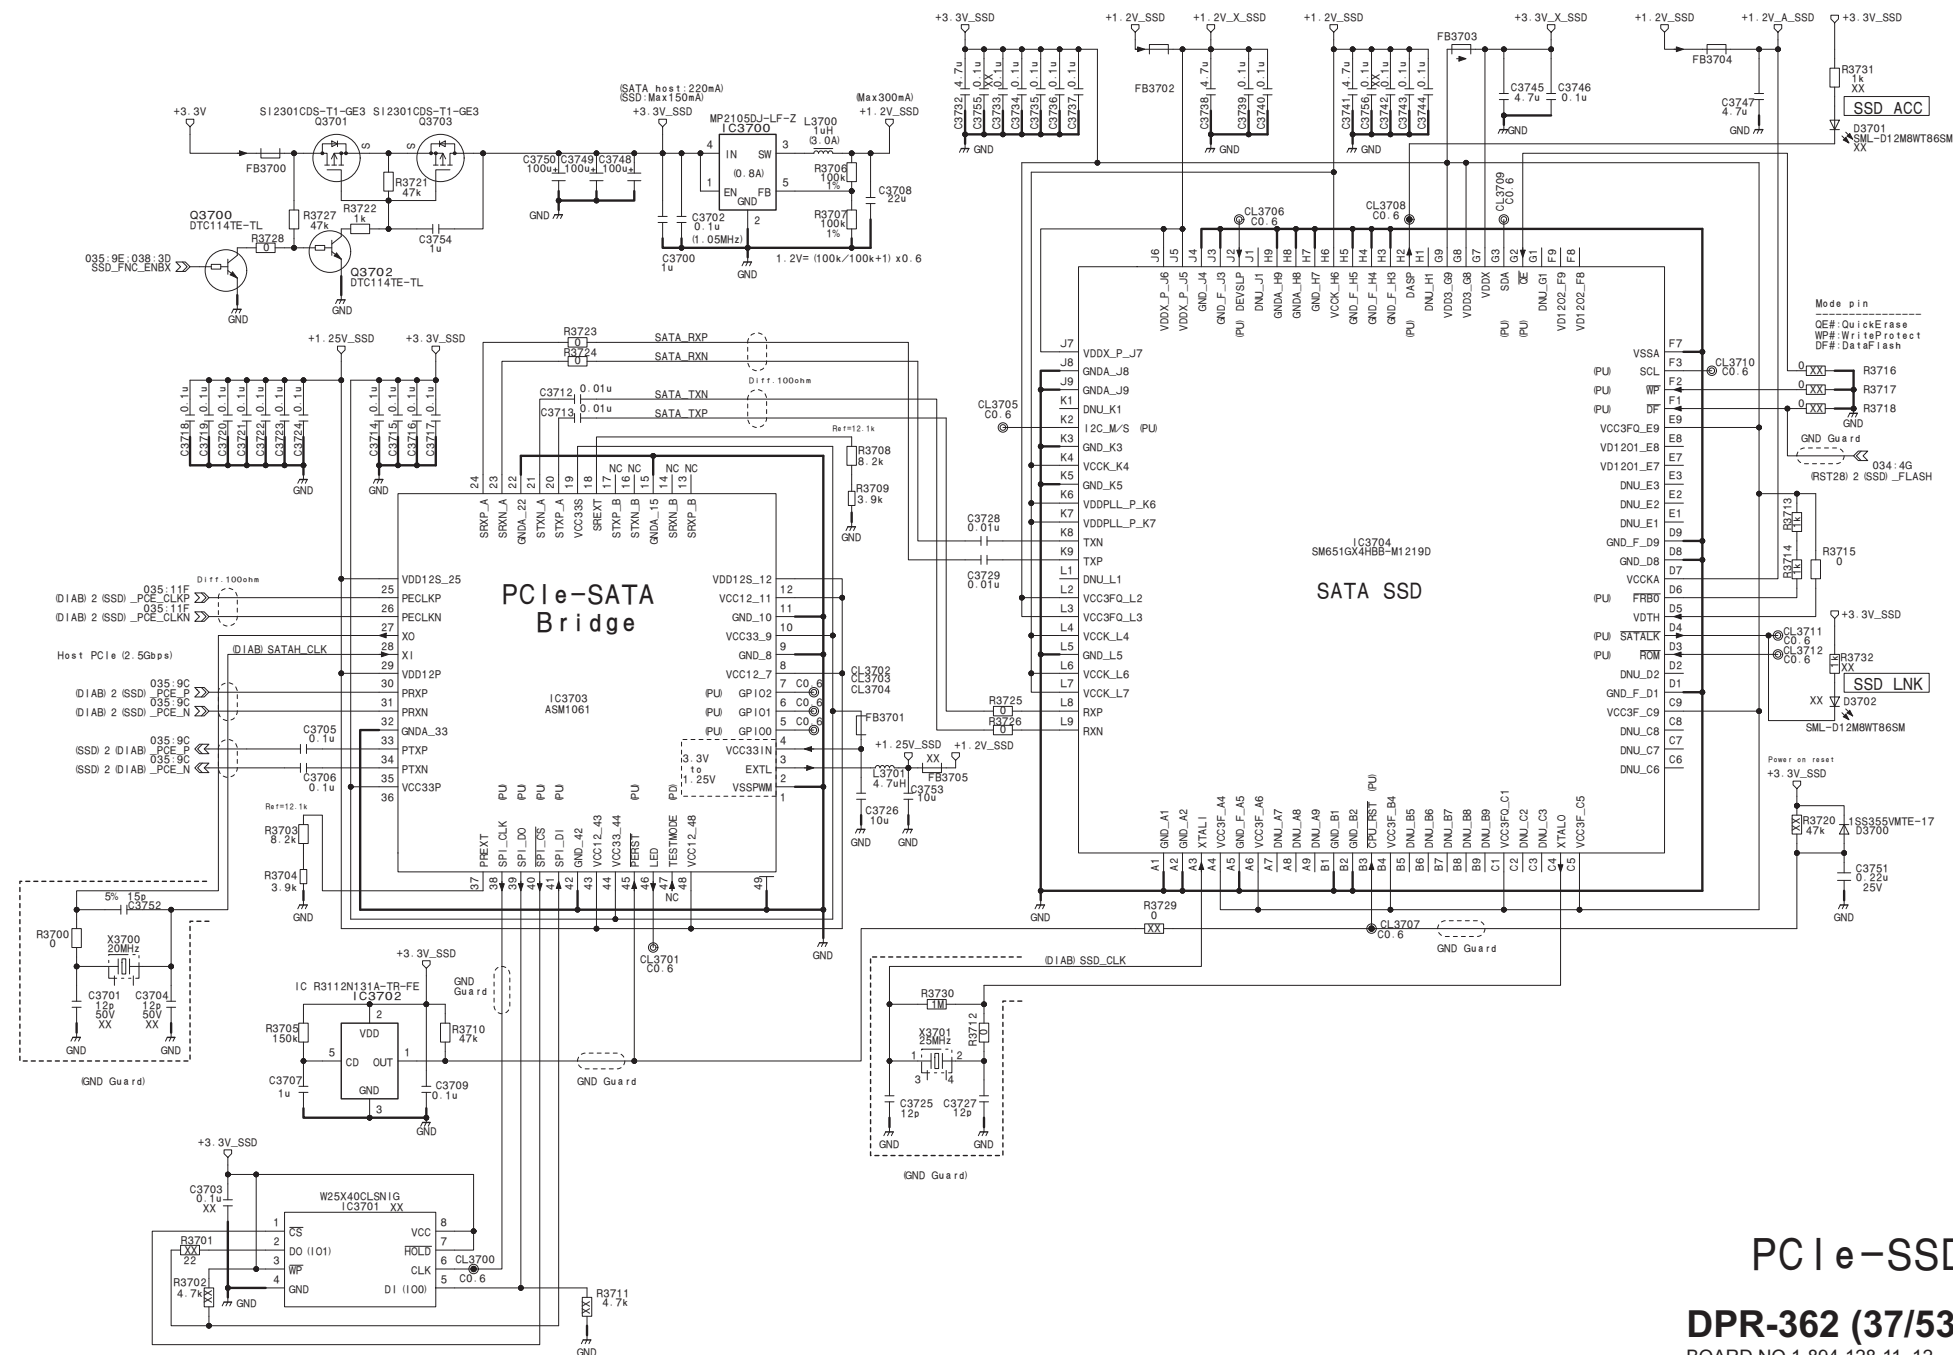




PC | e-SSD

DPR-362 (37/53)

BOARD NO.1-894-128-11, 12


DPR-362_37

Diablo (INT, GPIO)

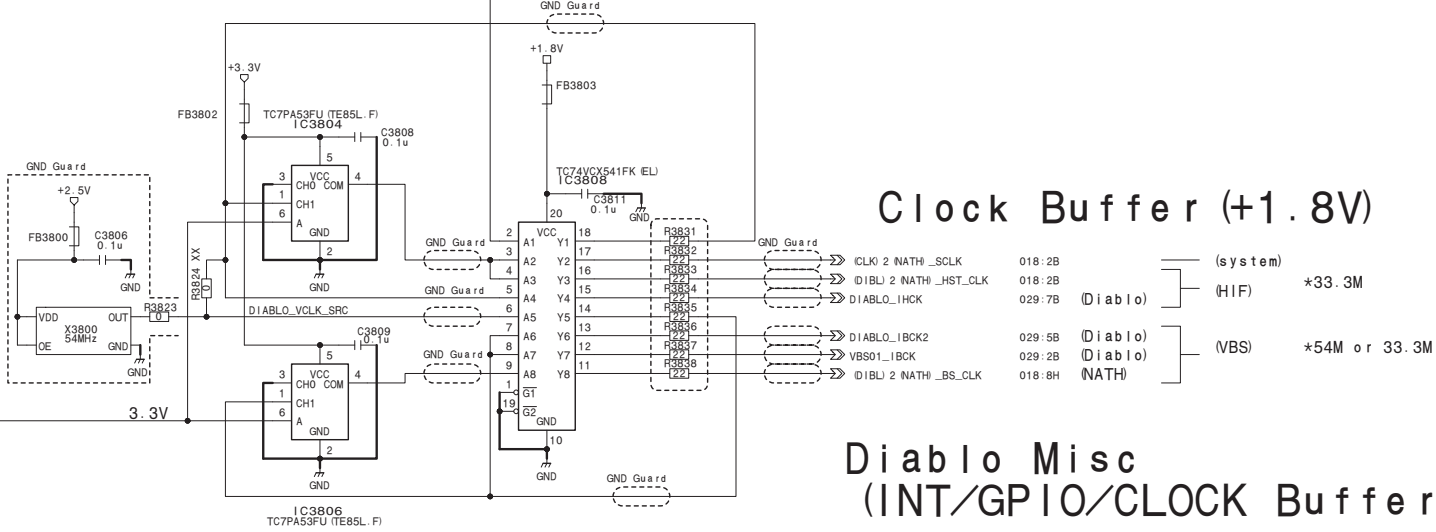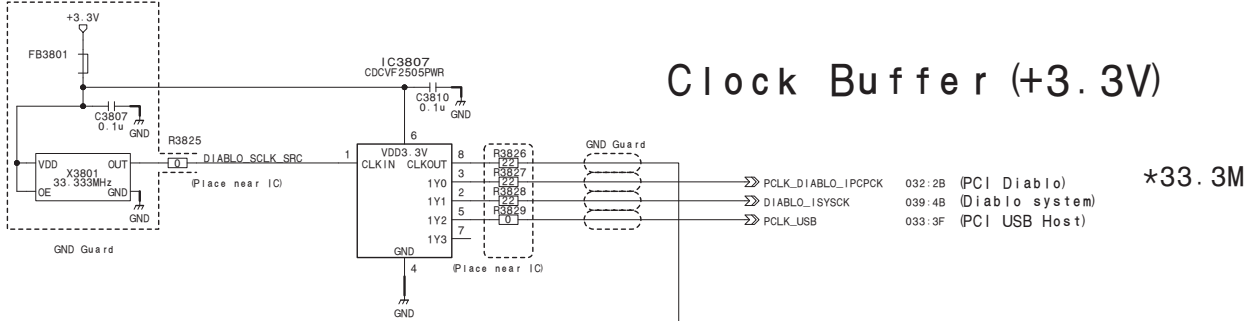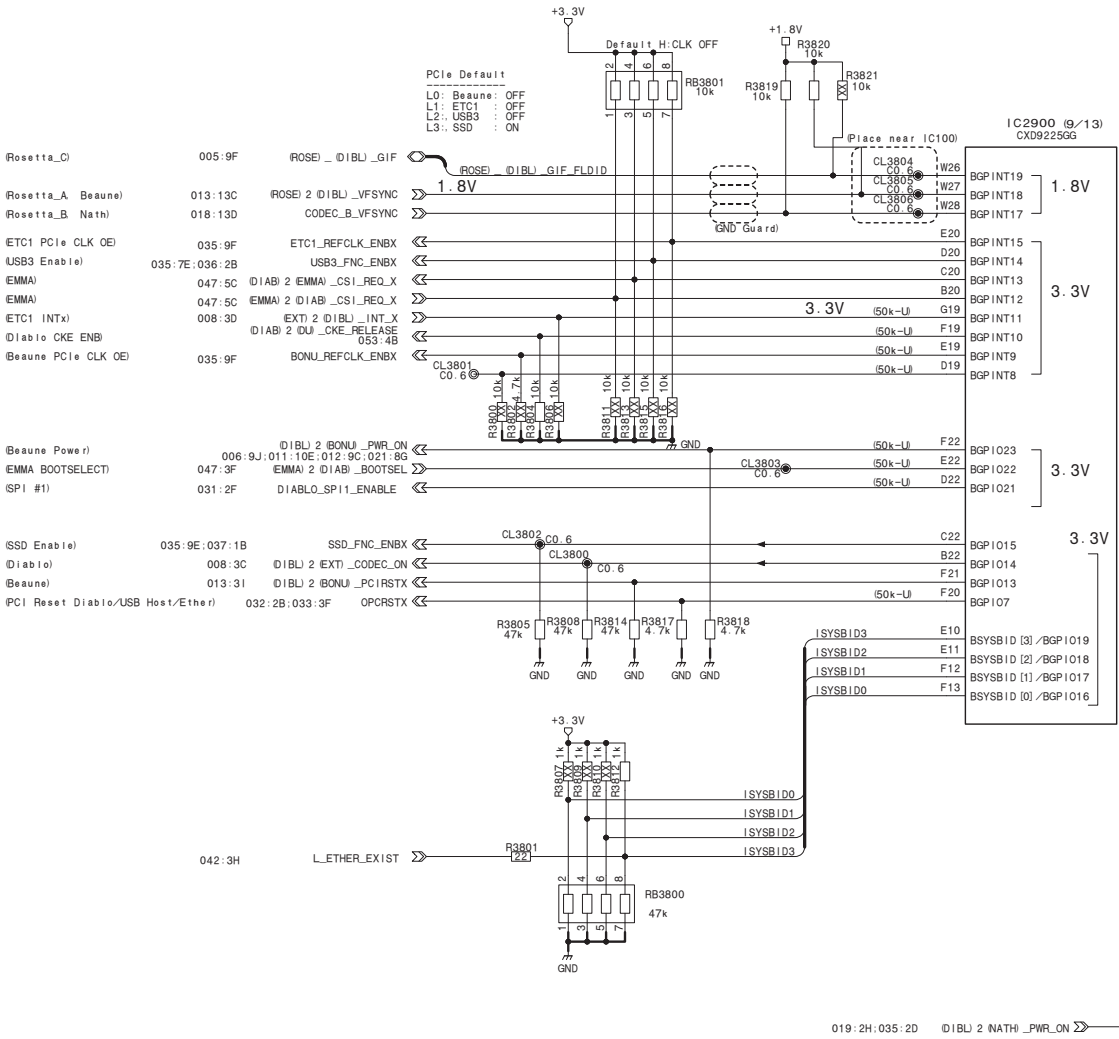


Diablo (rst/SC2P)

Charon
EMMA
Charon
DU-658

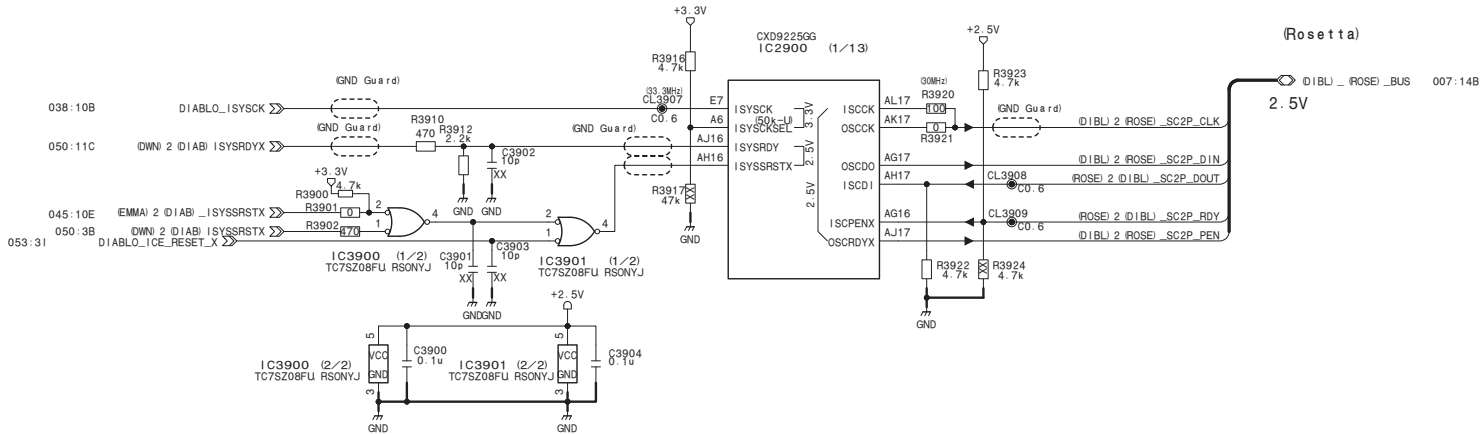

Diablo (I2C, ICE, CSI, UART)

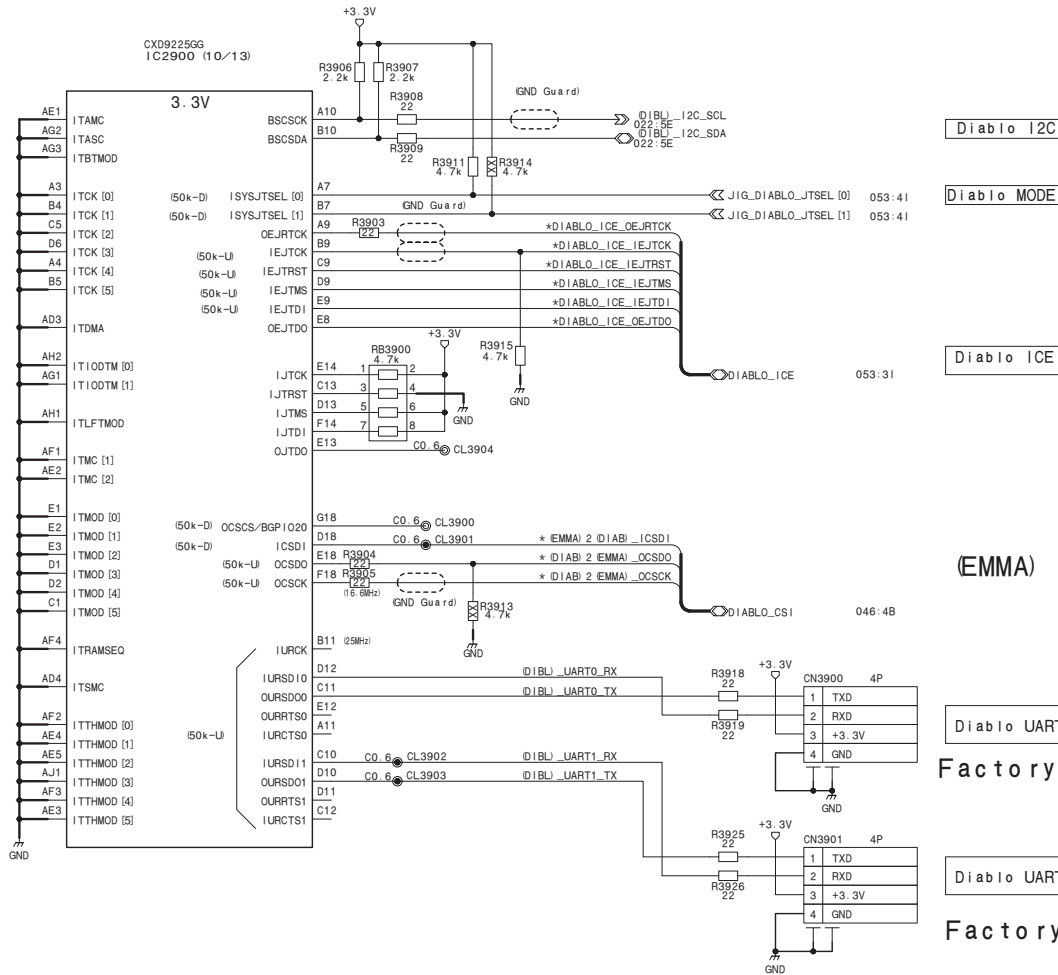

Diablo I2C

Diablo MODE

Diablo ICE

(EMMA)

Diablo UART0

Diablo UART1

Factory Use


Factory Use

Diablo Host
(I2C/ICE/UART/SC2P)

DPR-362 (39/53)

BOARD NO.1-894-128-11, 12
DPR-362_39


DPR-362 (40/53)

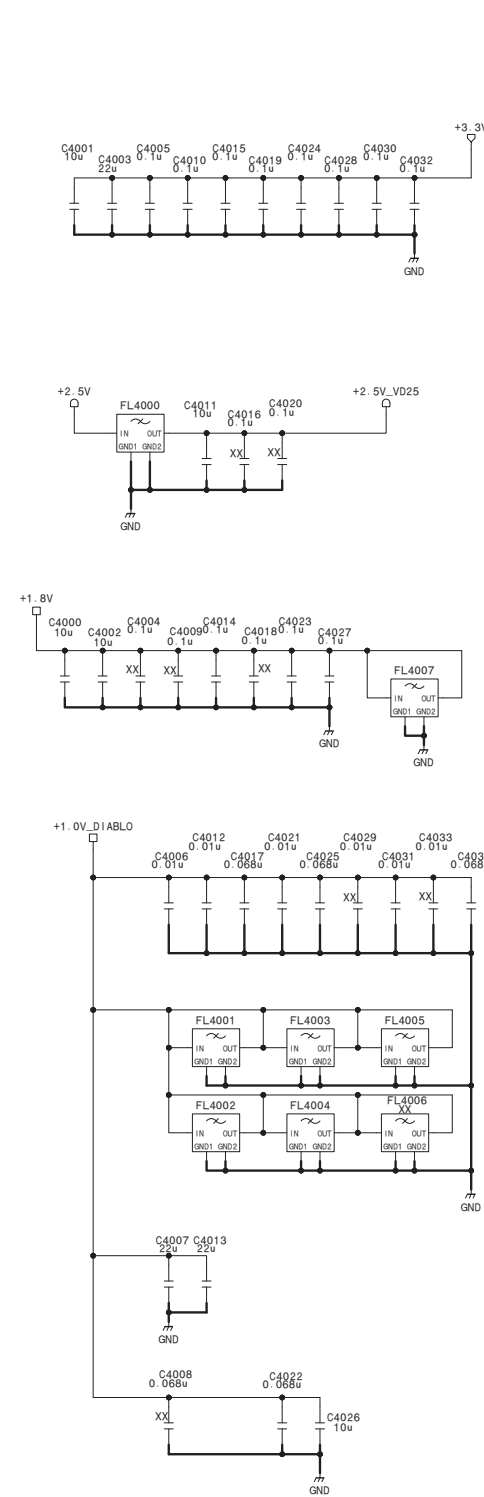


Diablo

CXD9225GG

IC2900 (11/13)

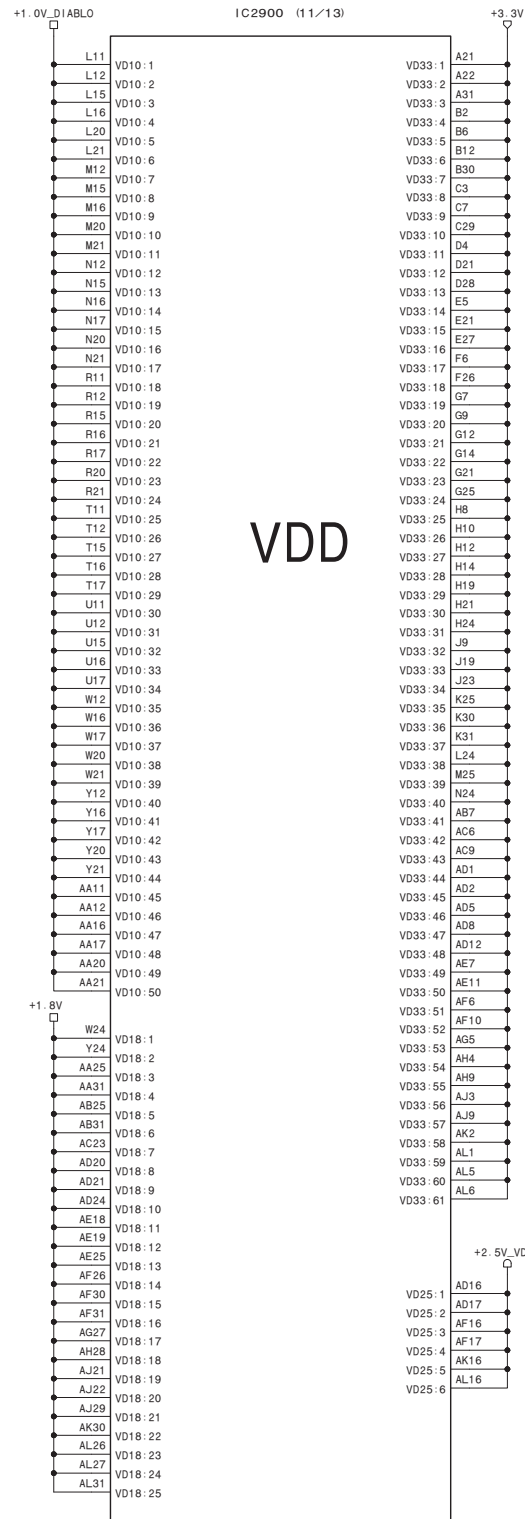

VDD

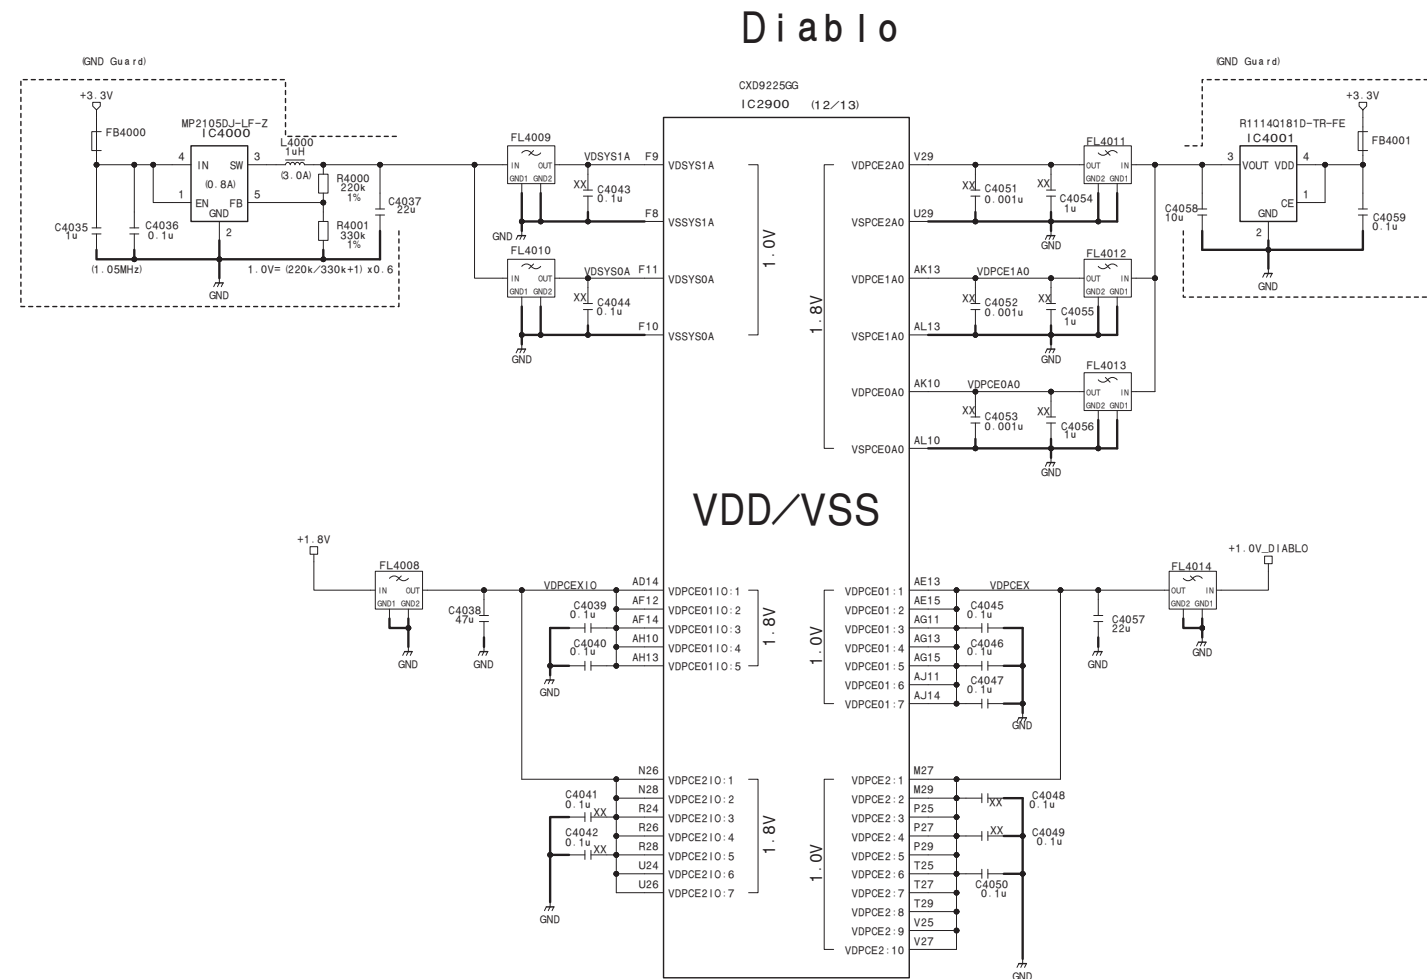


Diablo POWER (VDD/VSS)

DPR-362 (40/53)

BOARD NO.1-894-128-11, 12
DPR-362_40

DPR-362 (41/53)



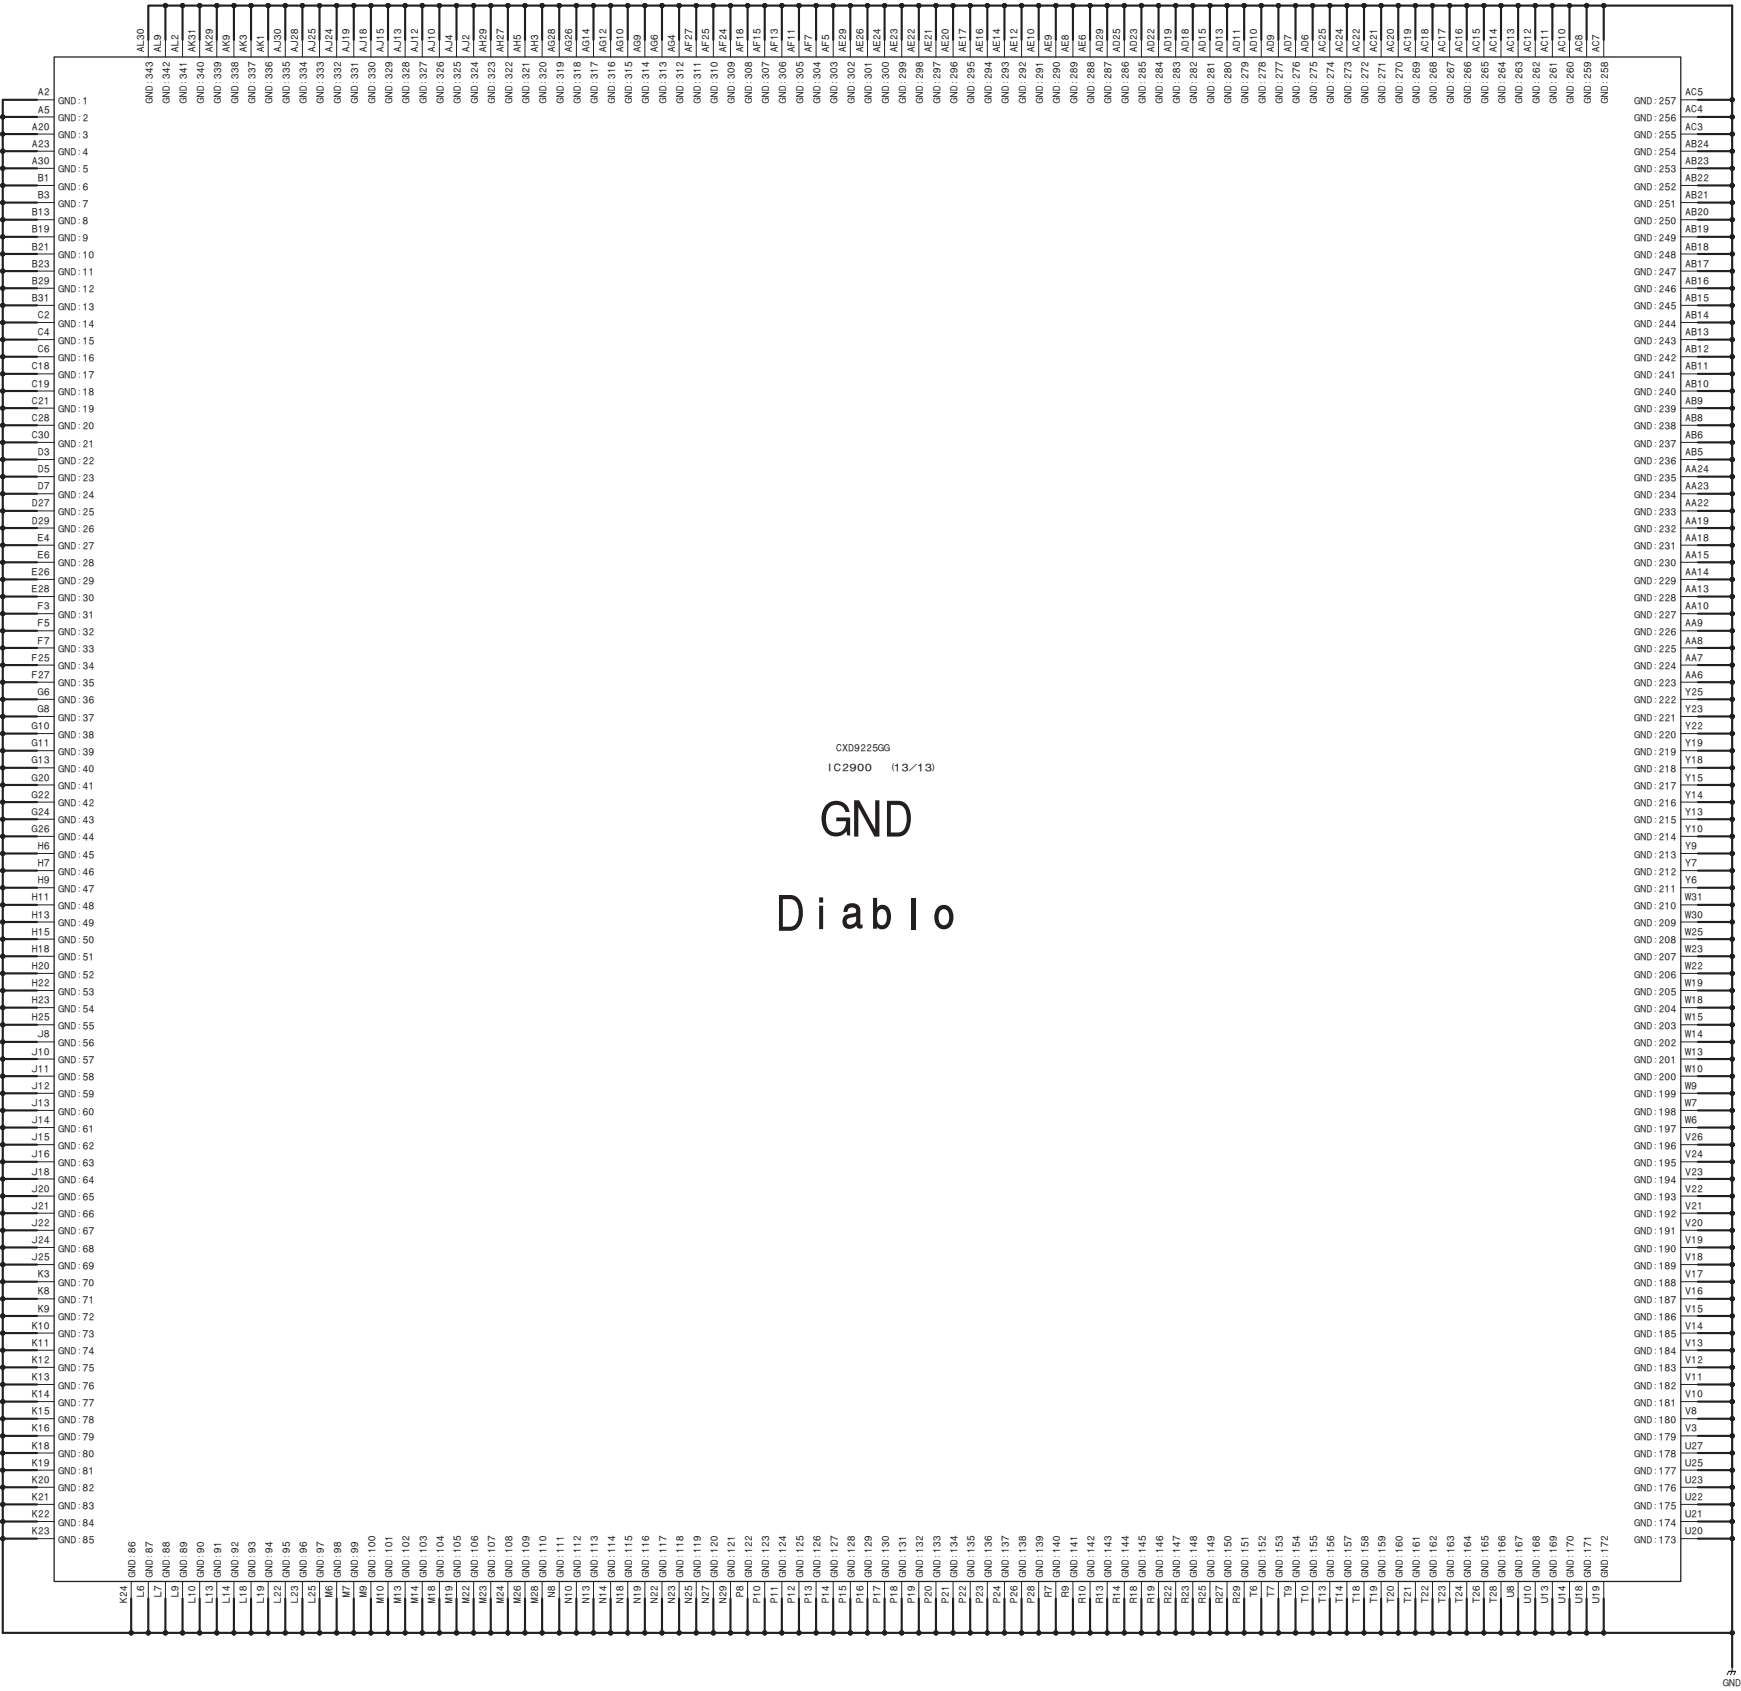


Diablo GND

DPR-362 (41/53)

BOARD NO.1-894-128-11, 12
DPR-362_41

DPR-362 (42/53)

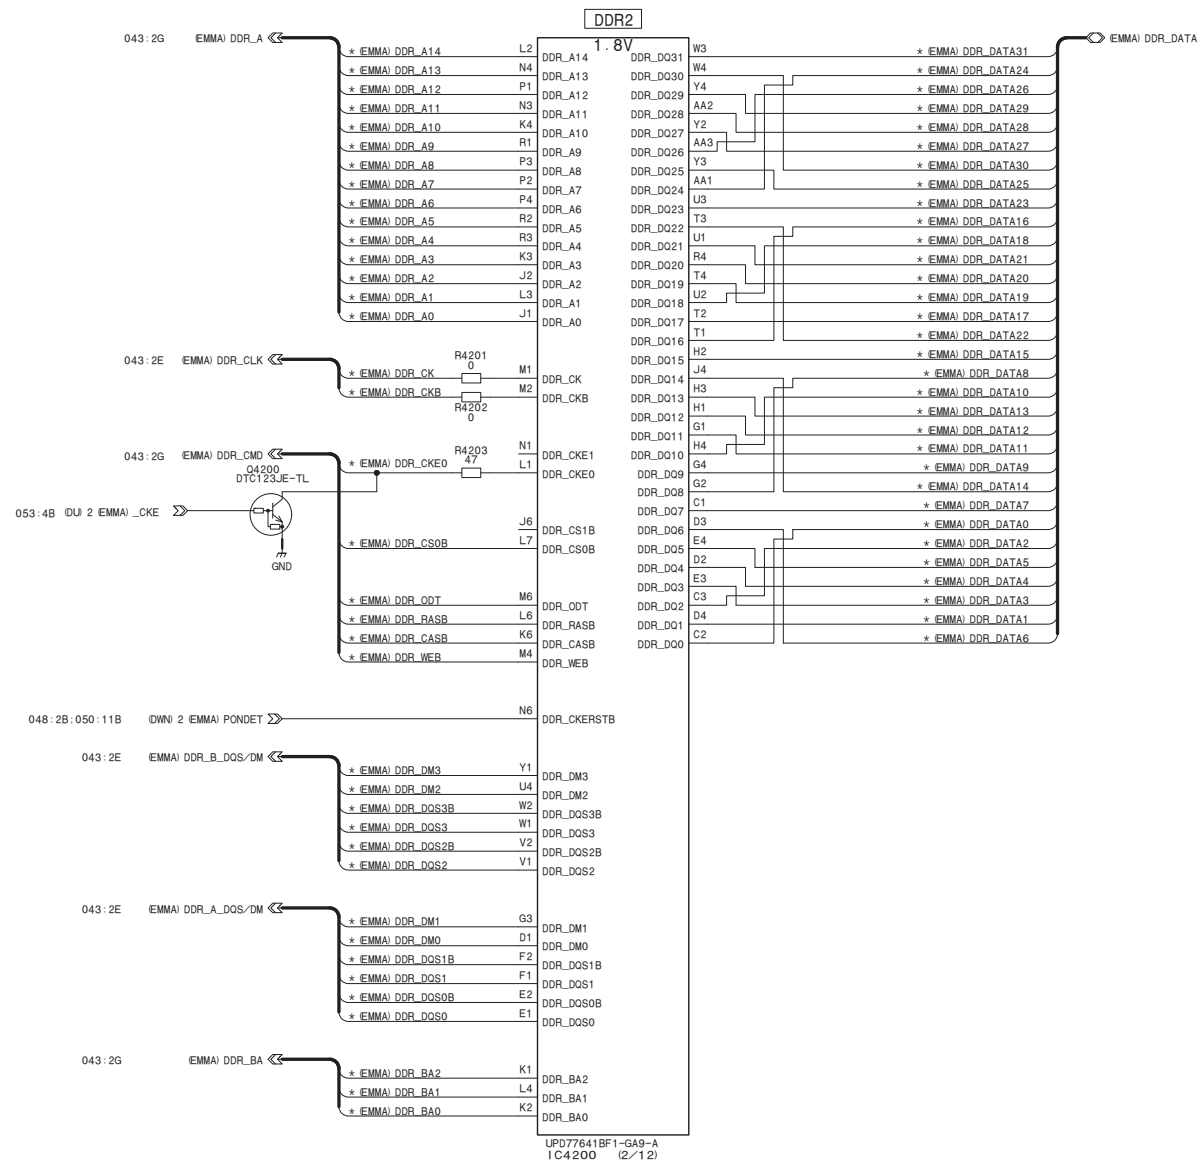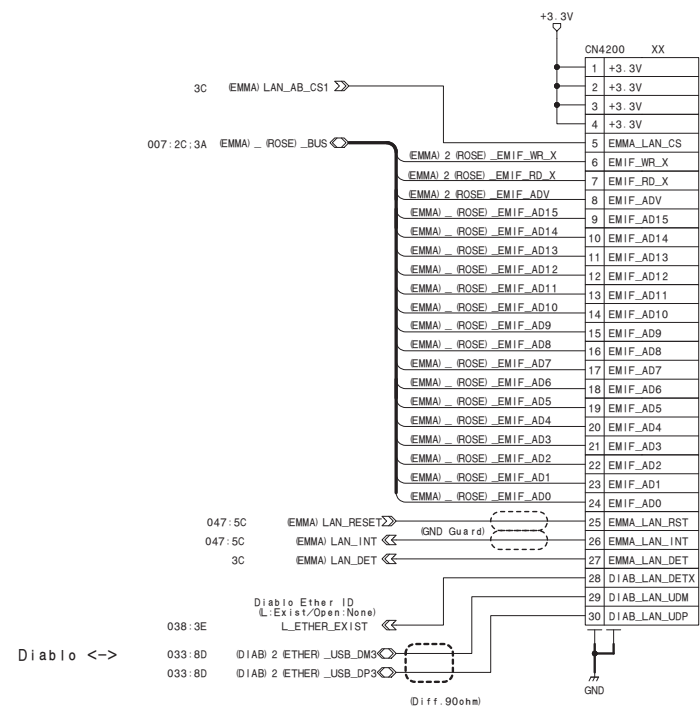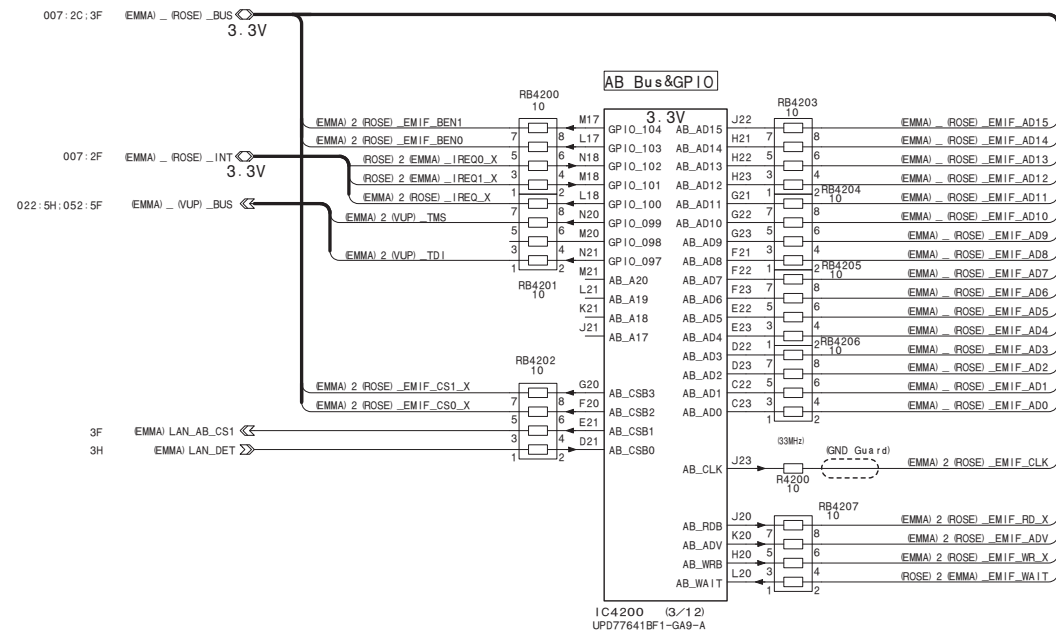


Emma Host (DDR2/EMIF)

DPR-362 (42/53)

BOARD NO.1-894-128-11, 12
DPR-362_42

DPR-362 (43/53)


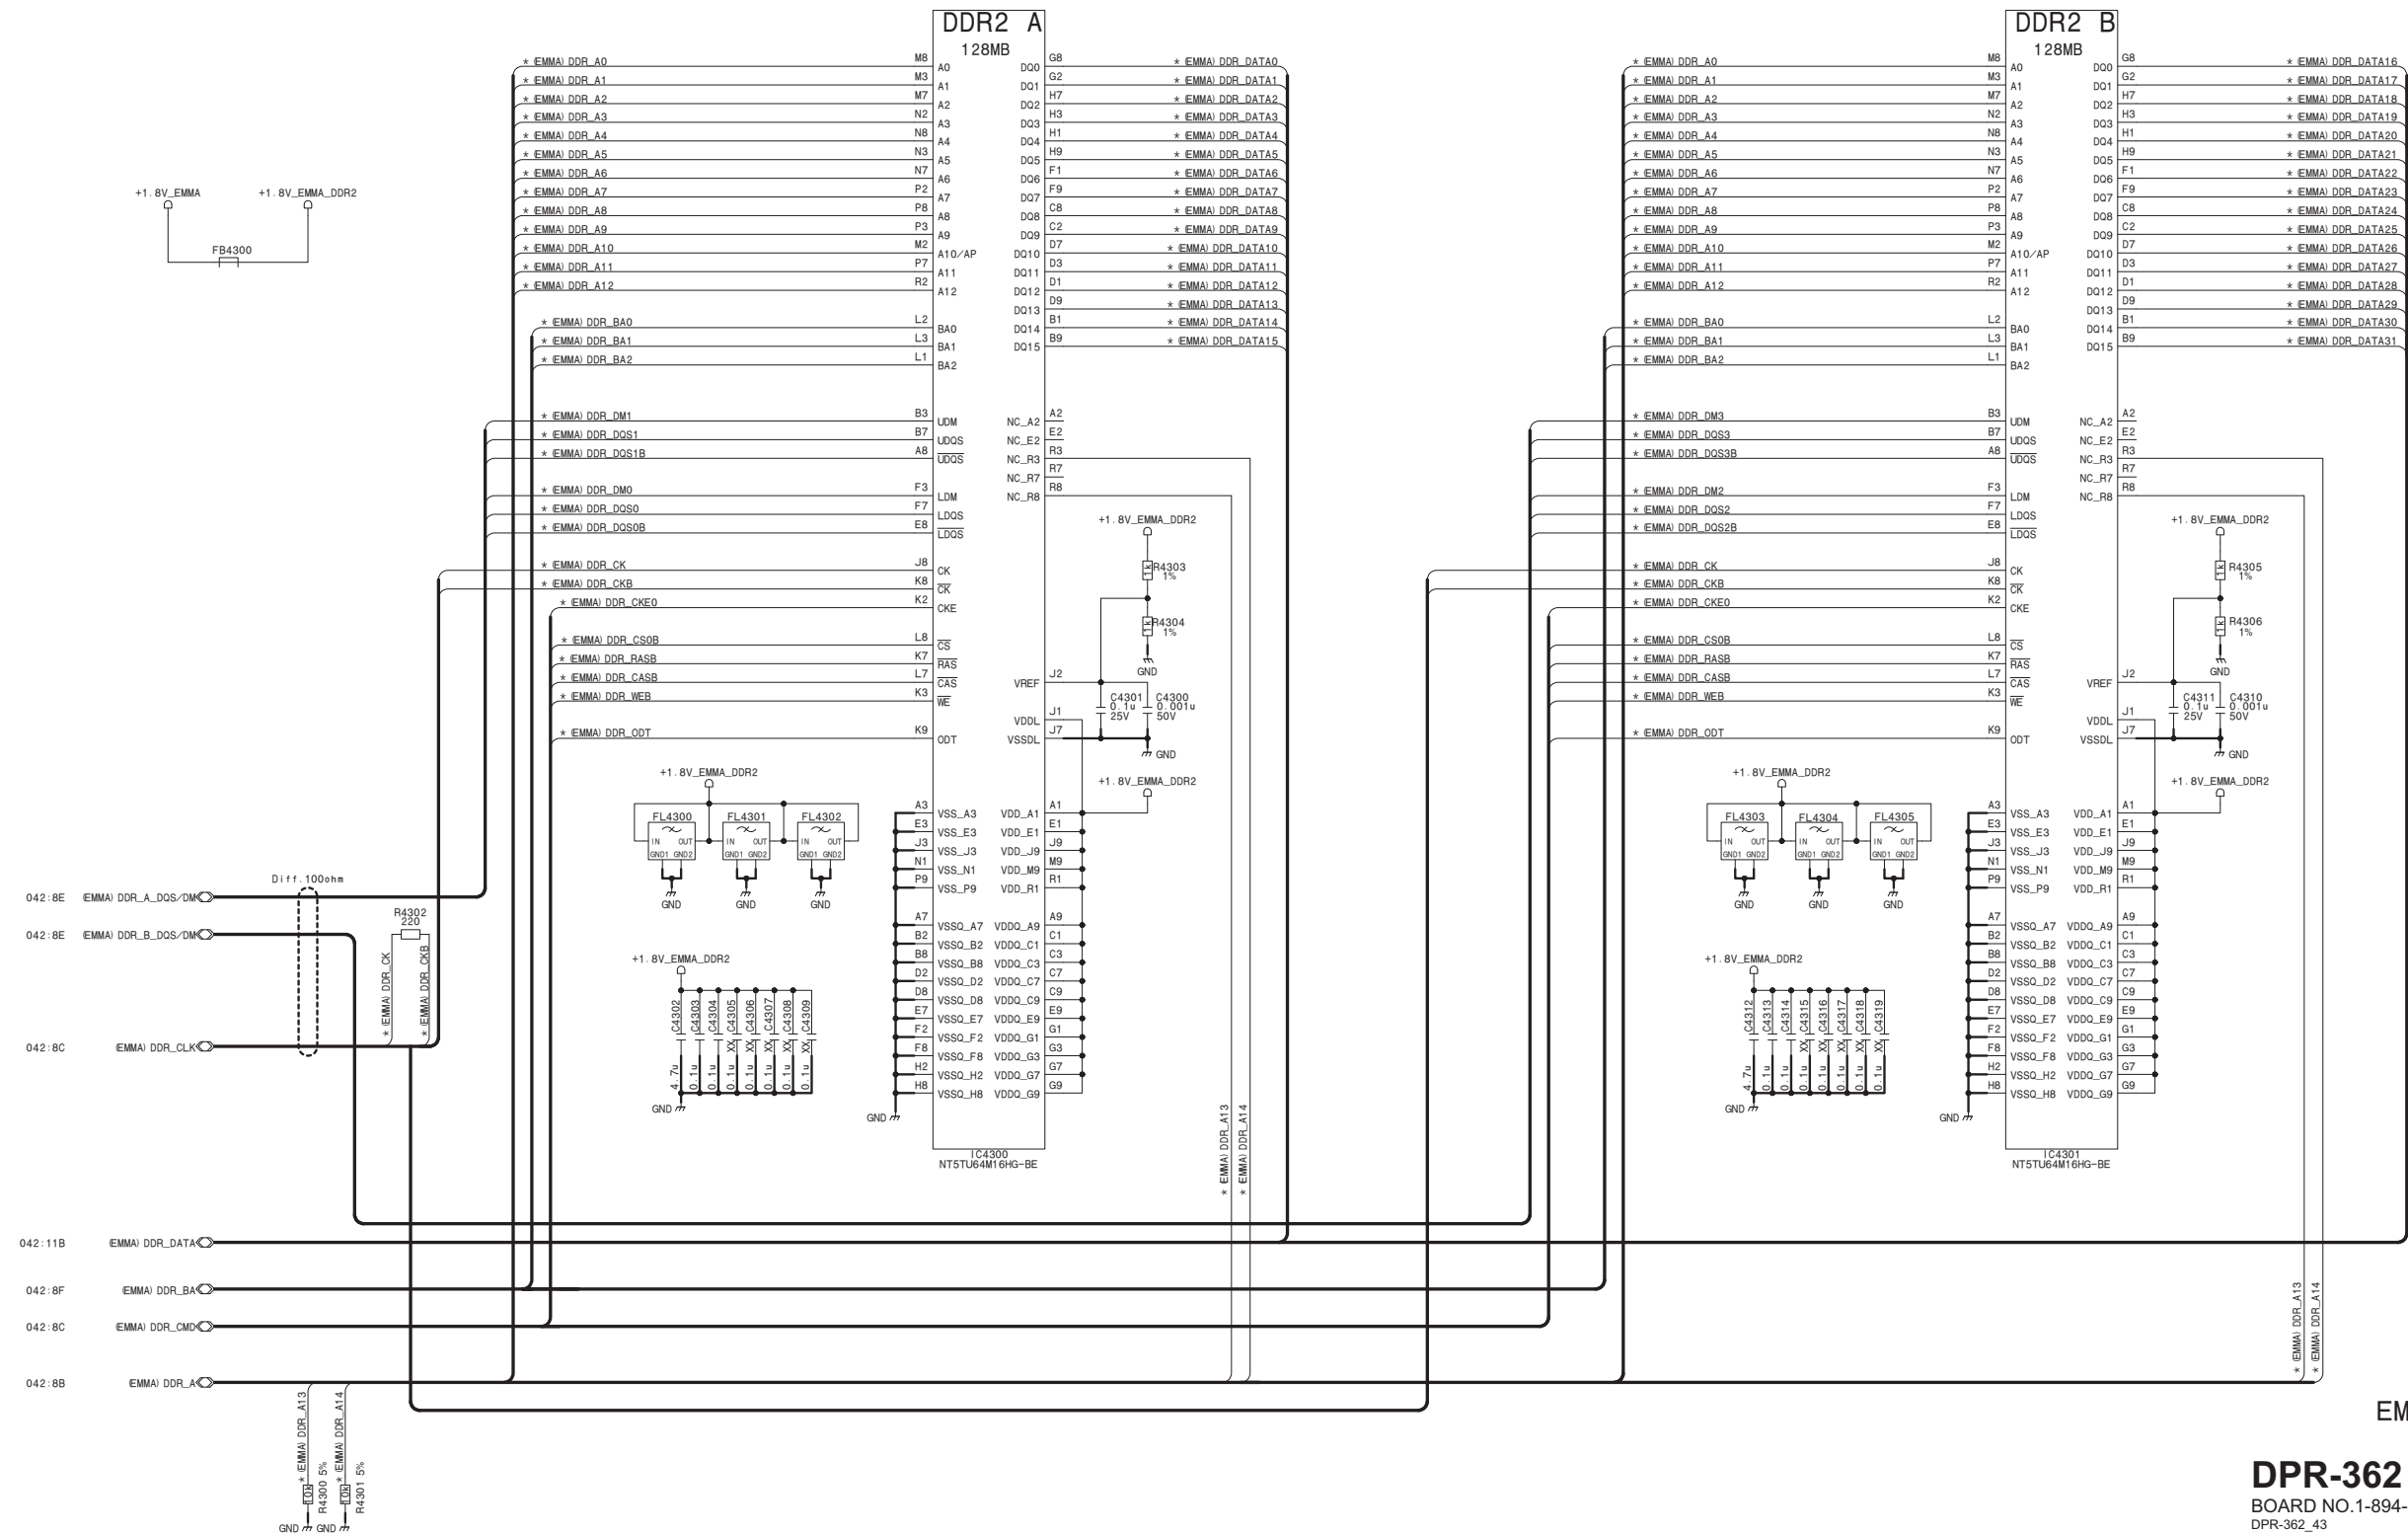


EMMA DDR2

DPR-362 (43/53)

BOARD NO.1-894-128-11, 12
DPR-362_43


DPR-362 (44/53)

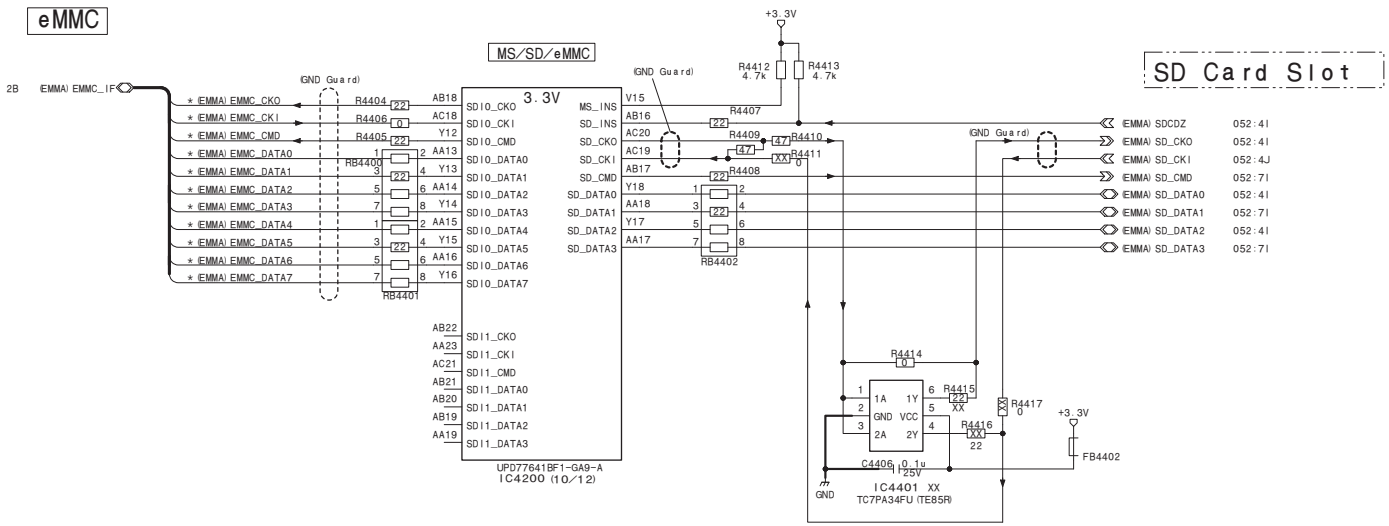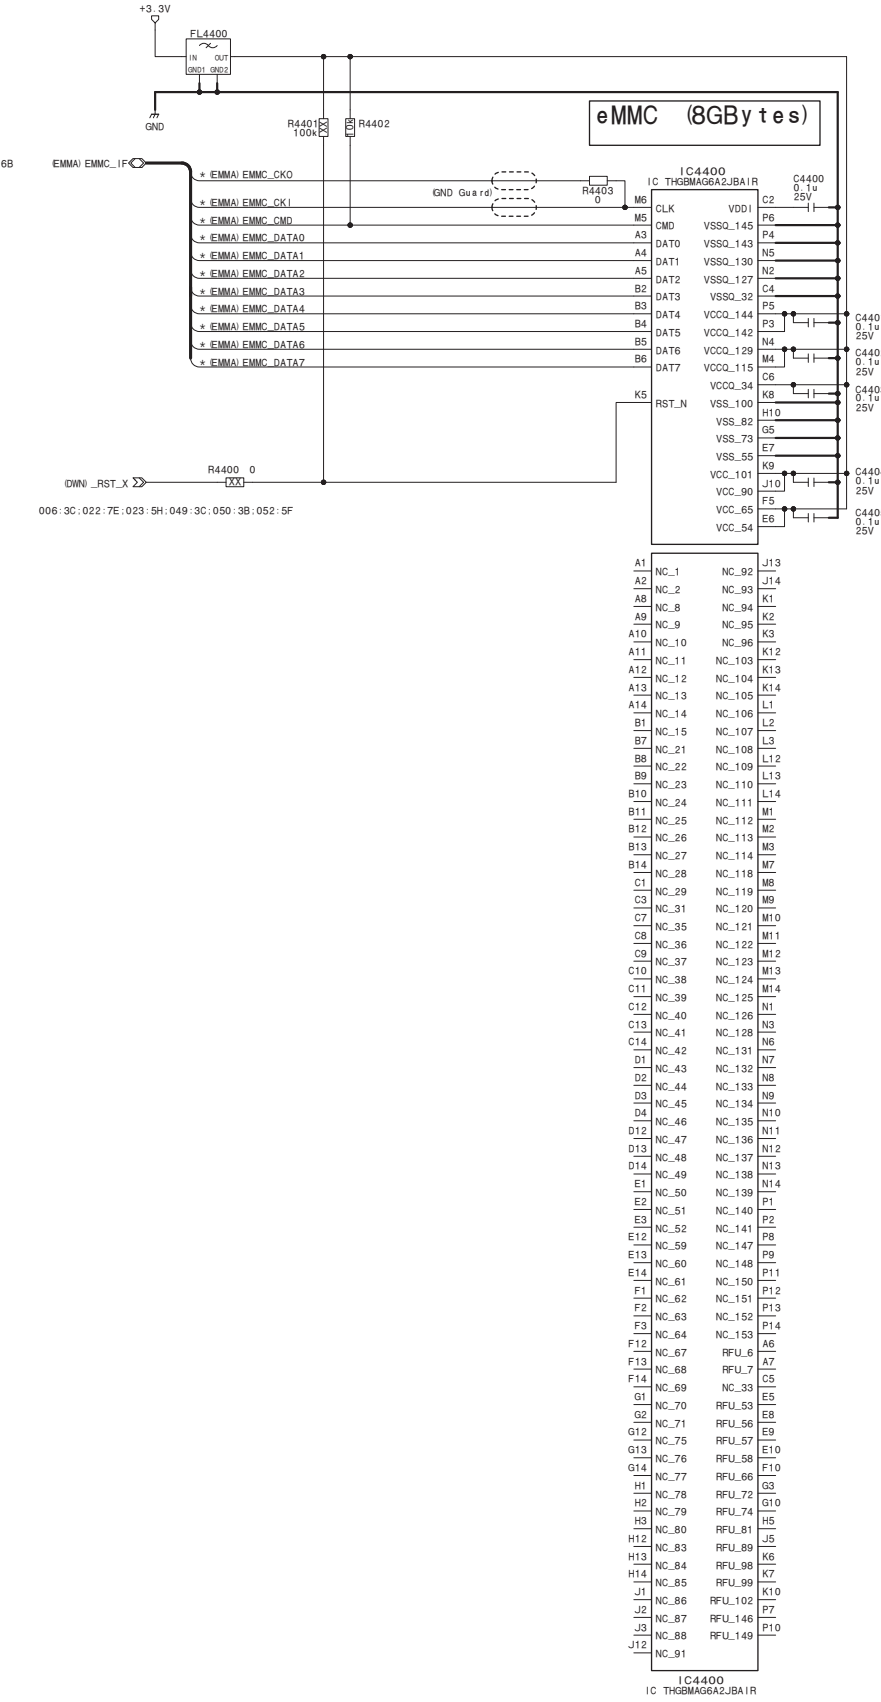




Emma (eMMC, MS/SD CN)

DPR-362 (44/53)

BOARD NO.1-894-128-11, 12
DPR-362_44

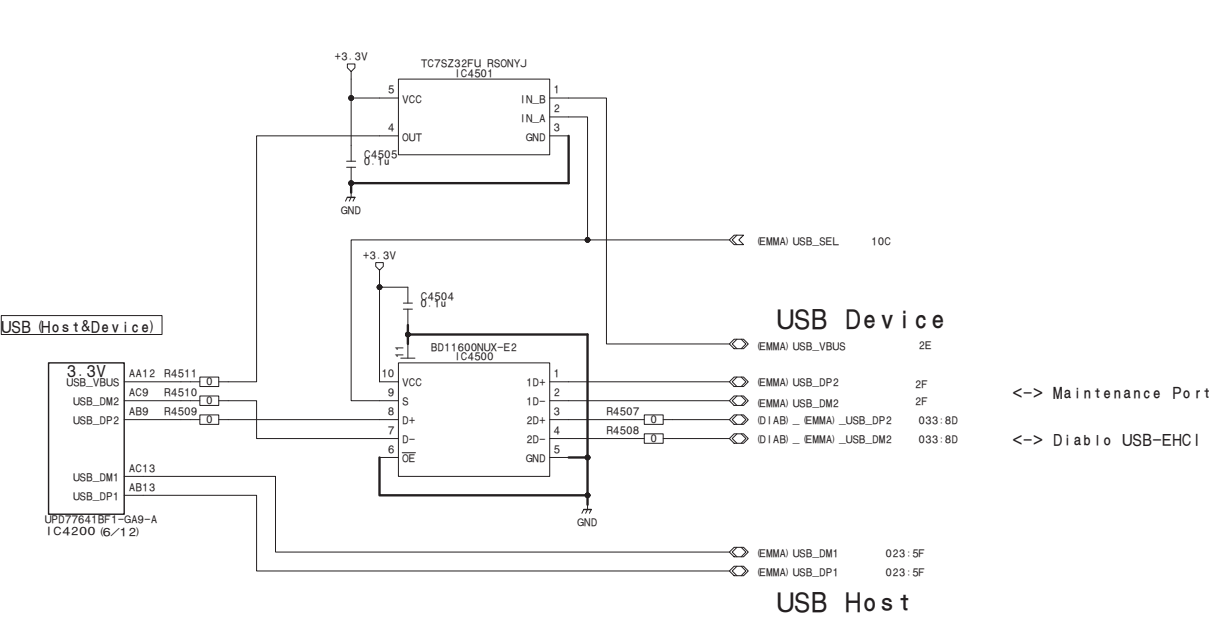


Memory dump
Rosetta-EMIF INT
GMON INT
LENS uCON INT

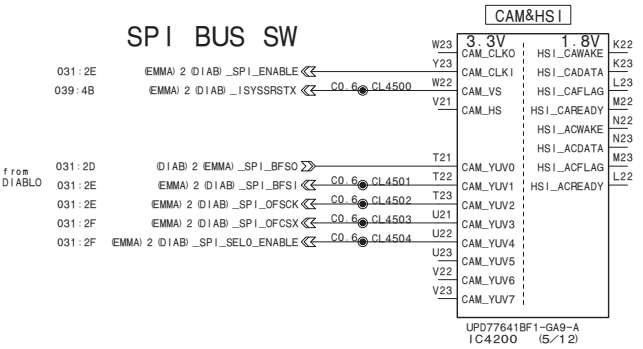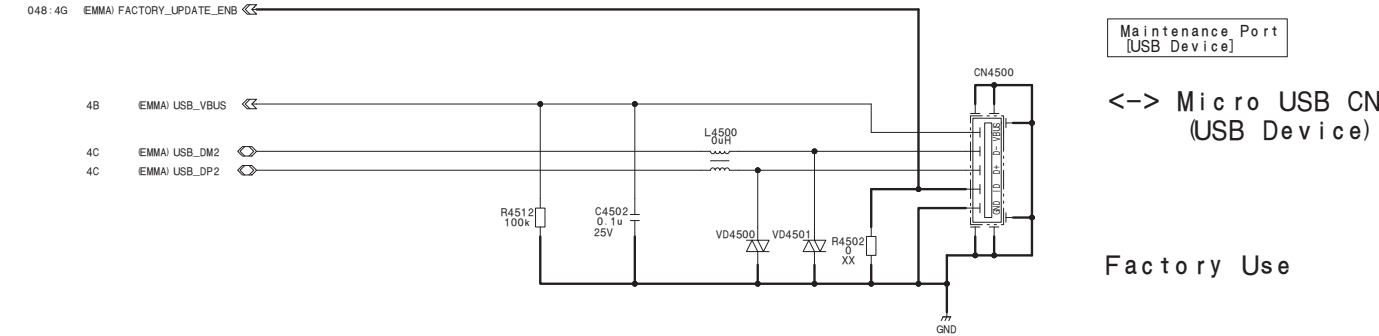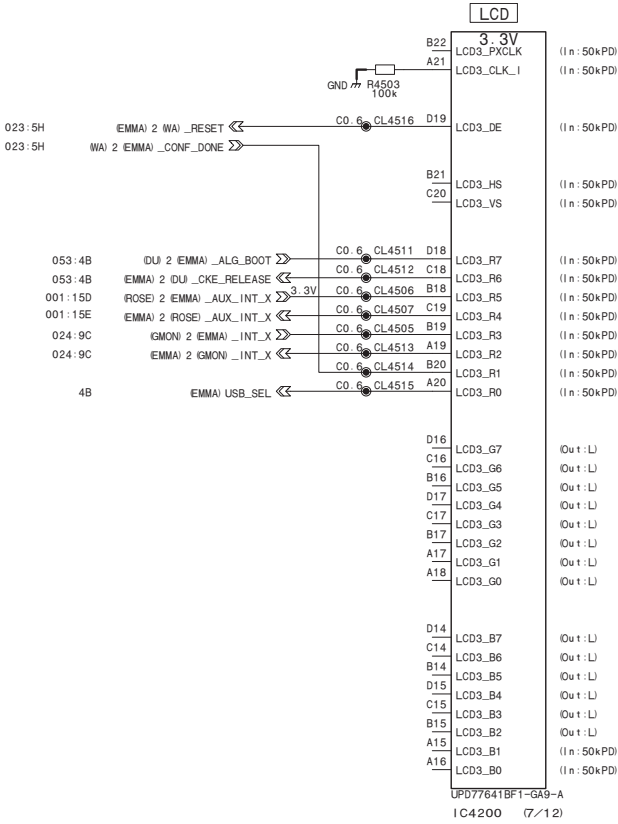

Emma (USB, CAM/LCD)

DPR-362 (45/53)
BOARD NO.1-894-128-11, 12
DPR-362_45

DPR-362 (46/53)

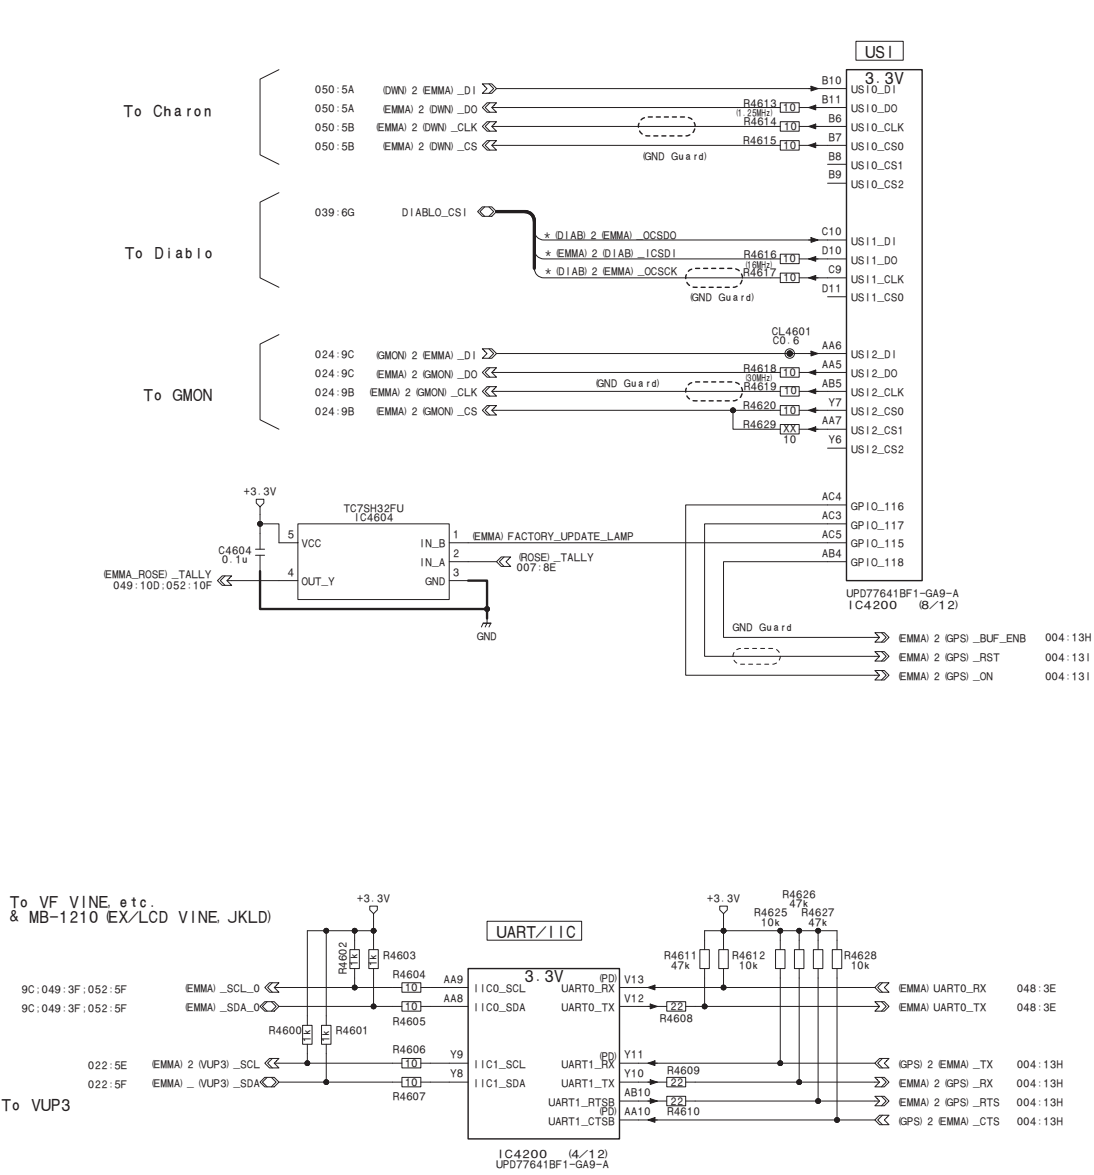

Real Time Clock


Serial E2PROM

Thermal Sensor





EMMA Misc
(US1/I2C/UART)

DPR-362 (46/53)

BOARD NO.1-894-128-11, 12
DPR-362_46

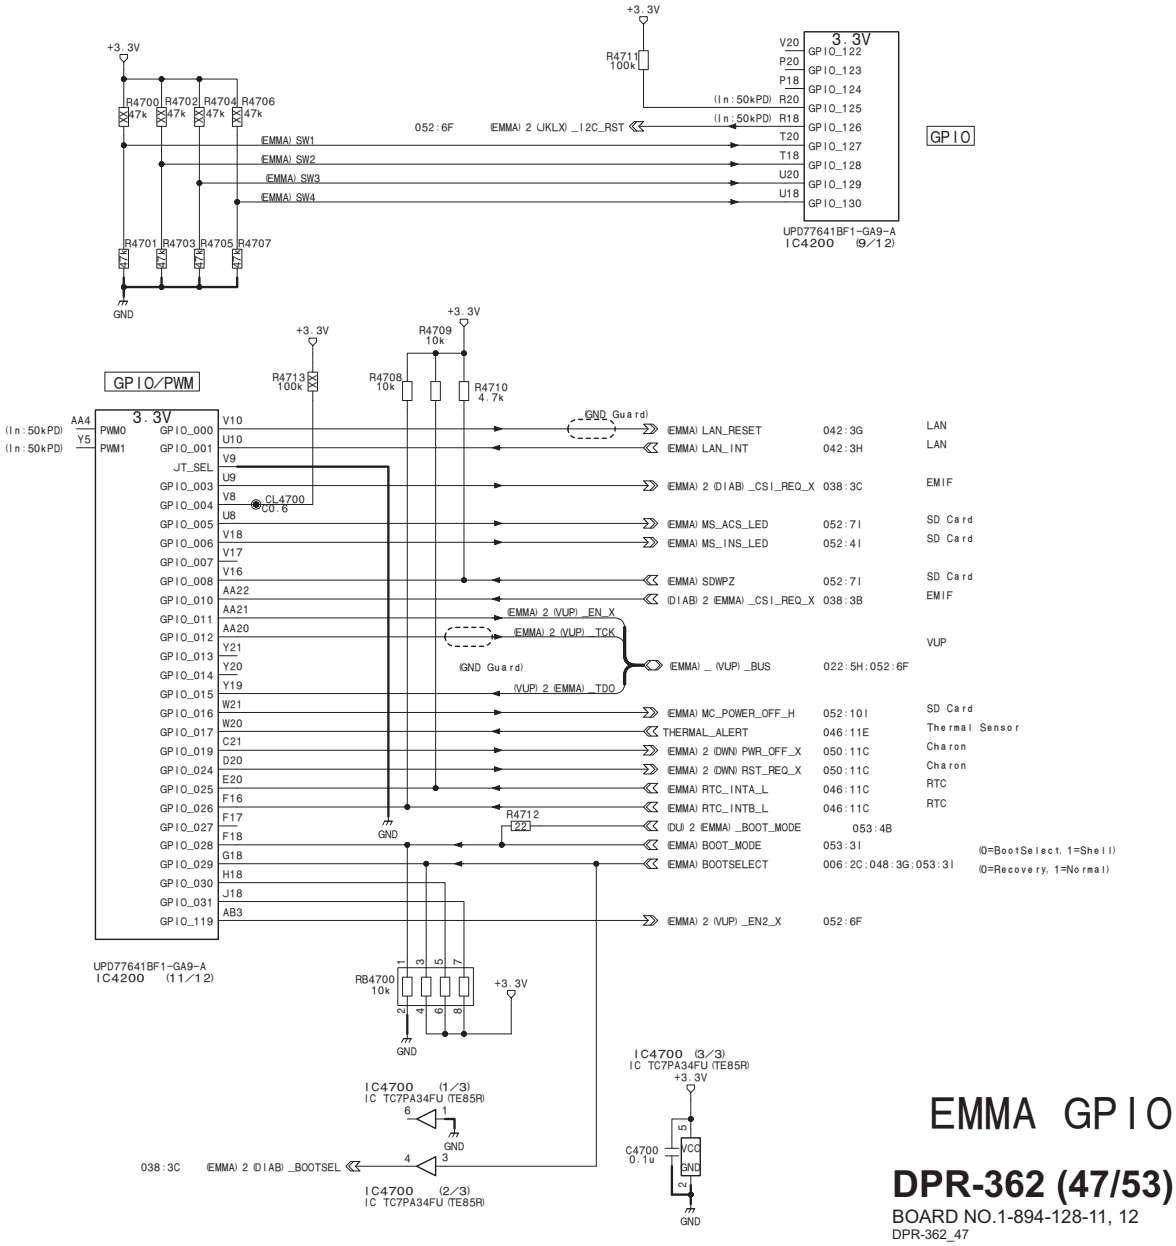


DPR-362 (48/53)

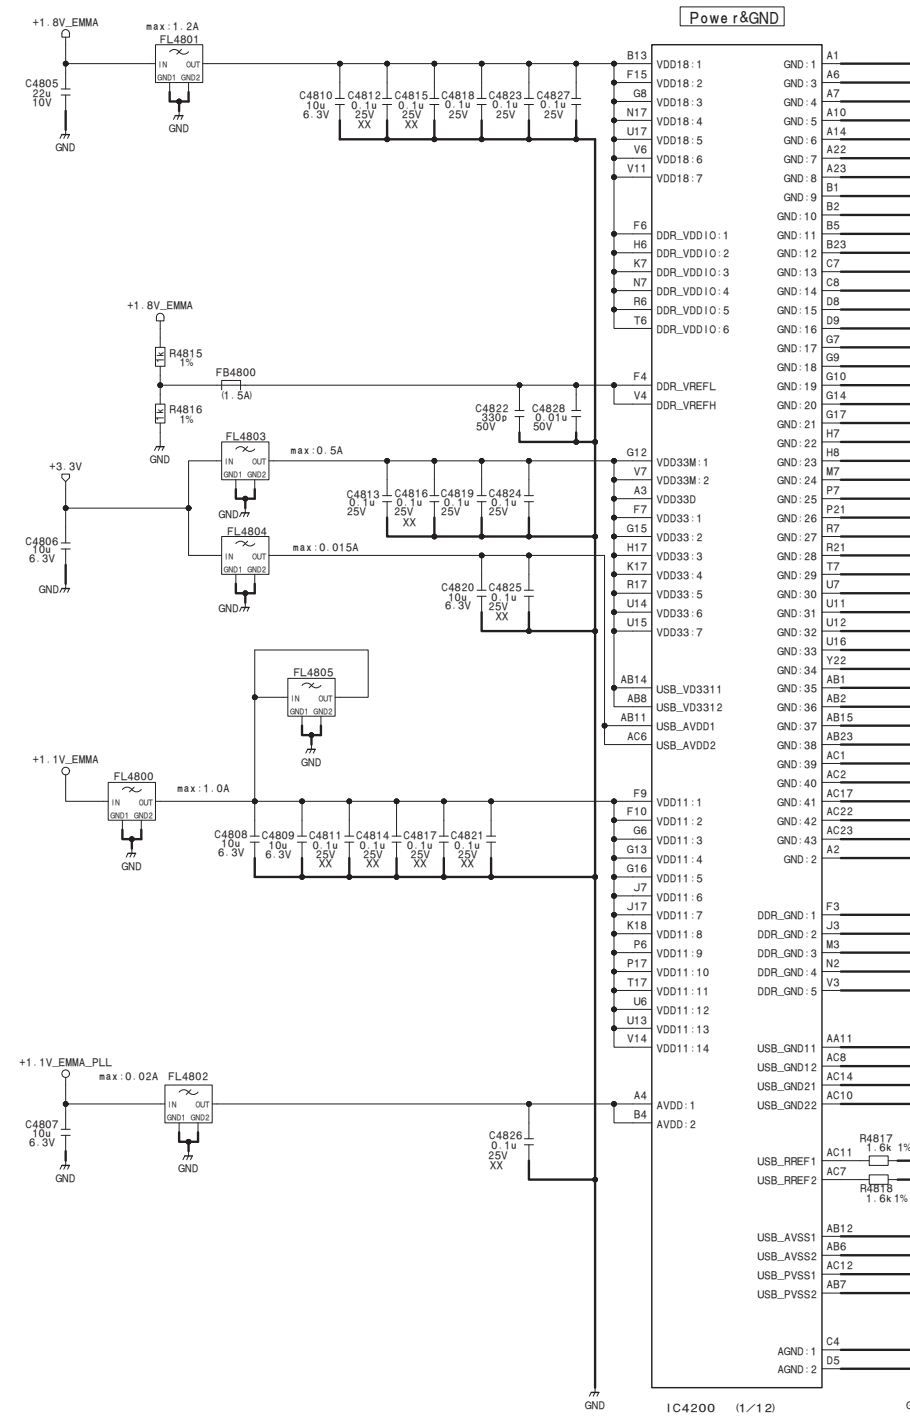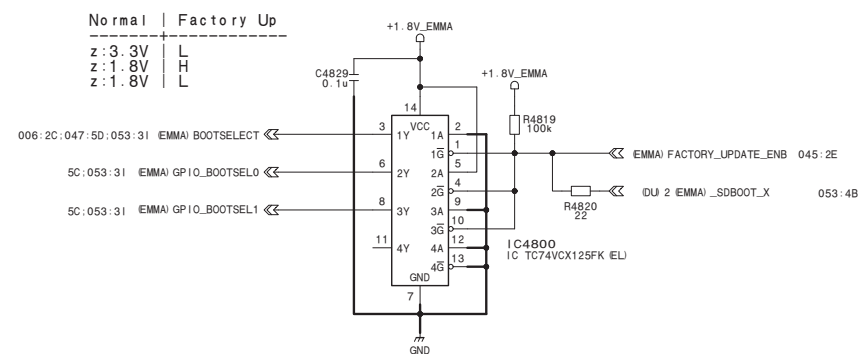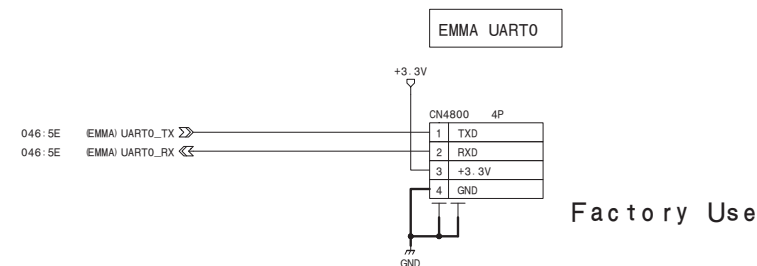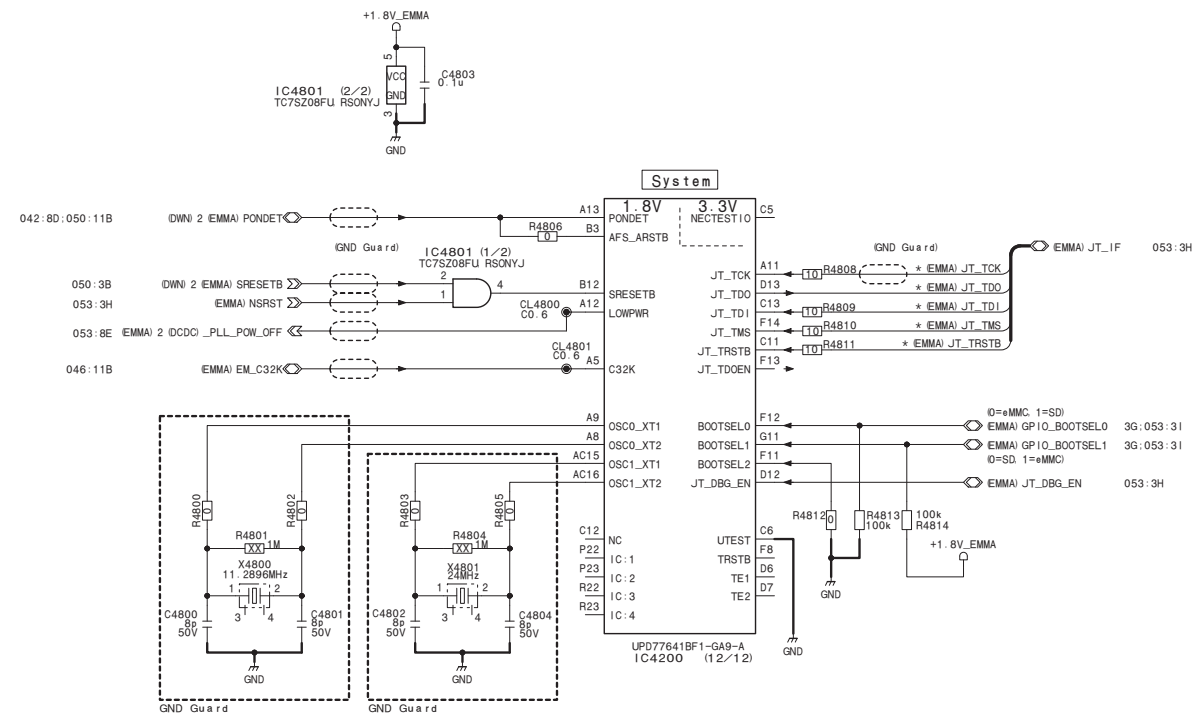


EMMA Power (System) (JTAG ICE)


DPR-362 (48/53)
BOARD NO.1-894-128-11, 12
DPR-362 48

DPR-362 (49/53)

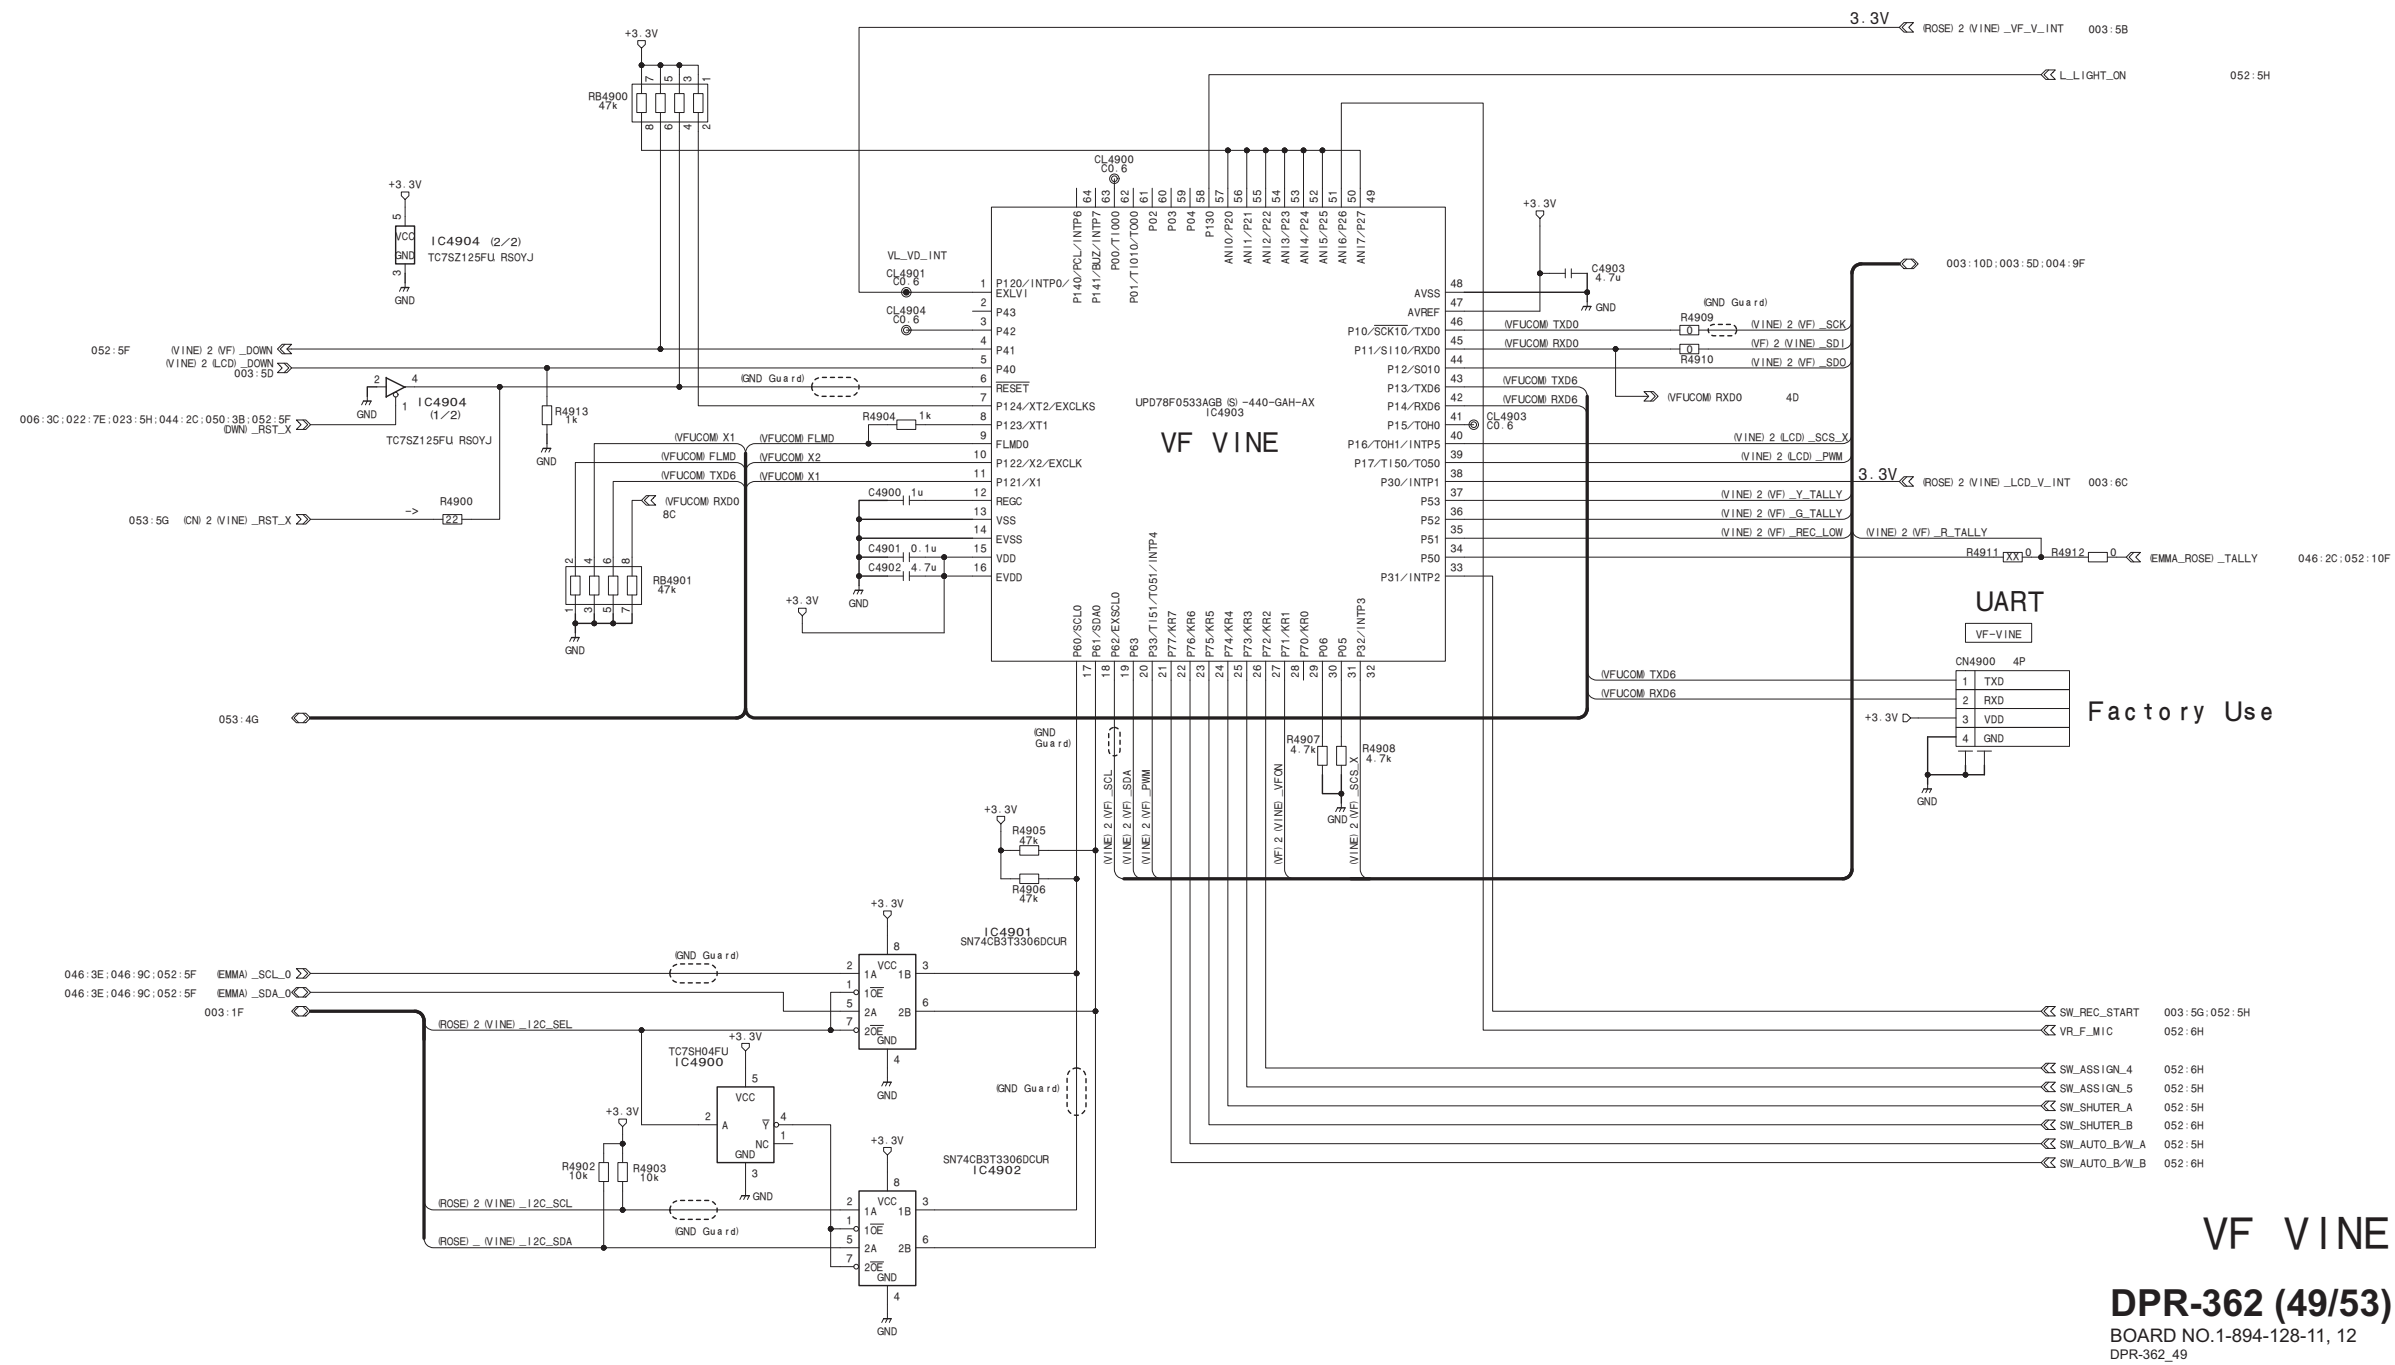

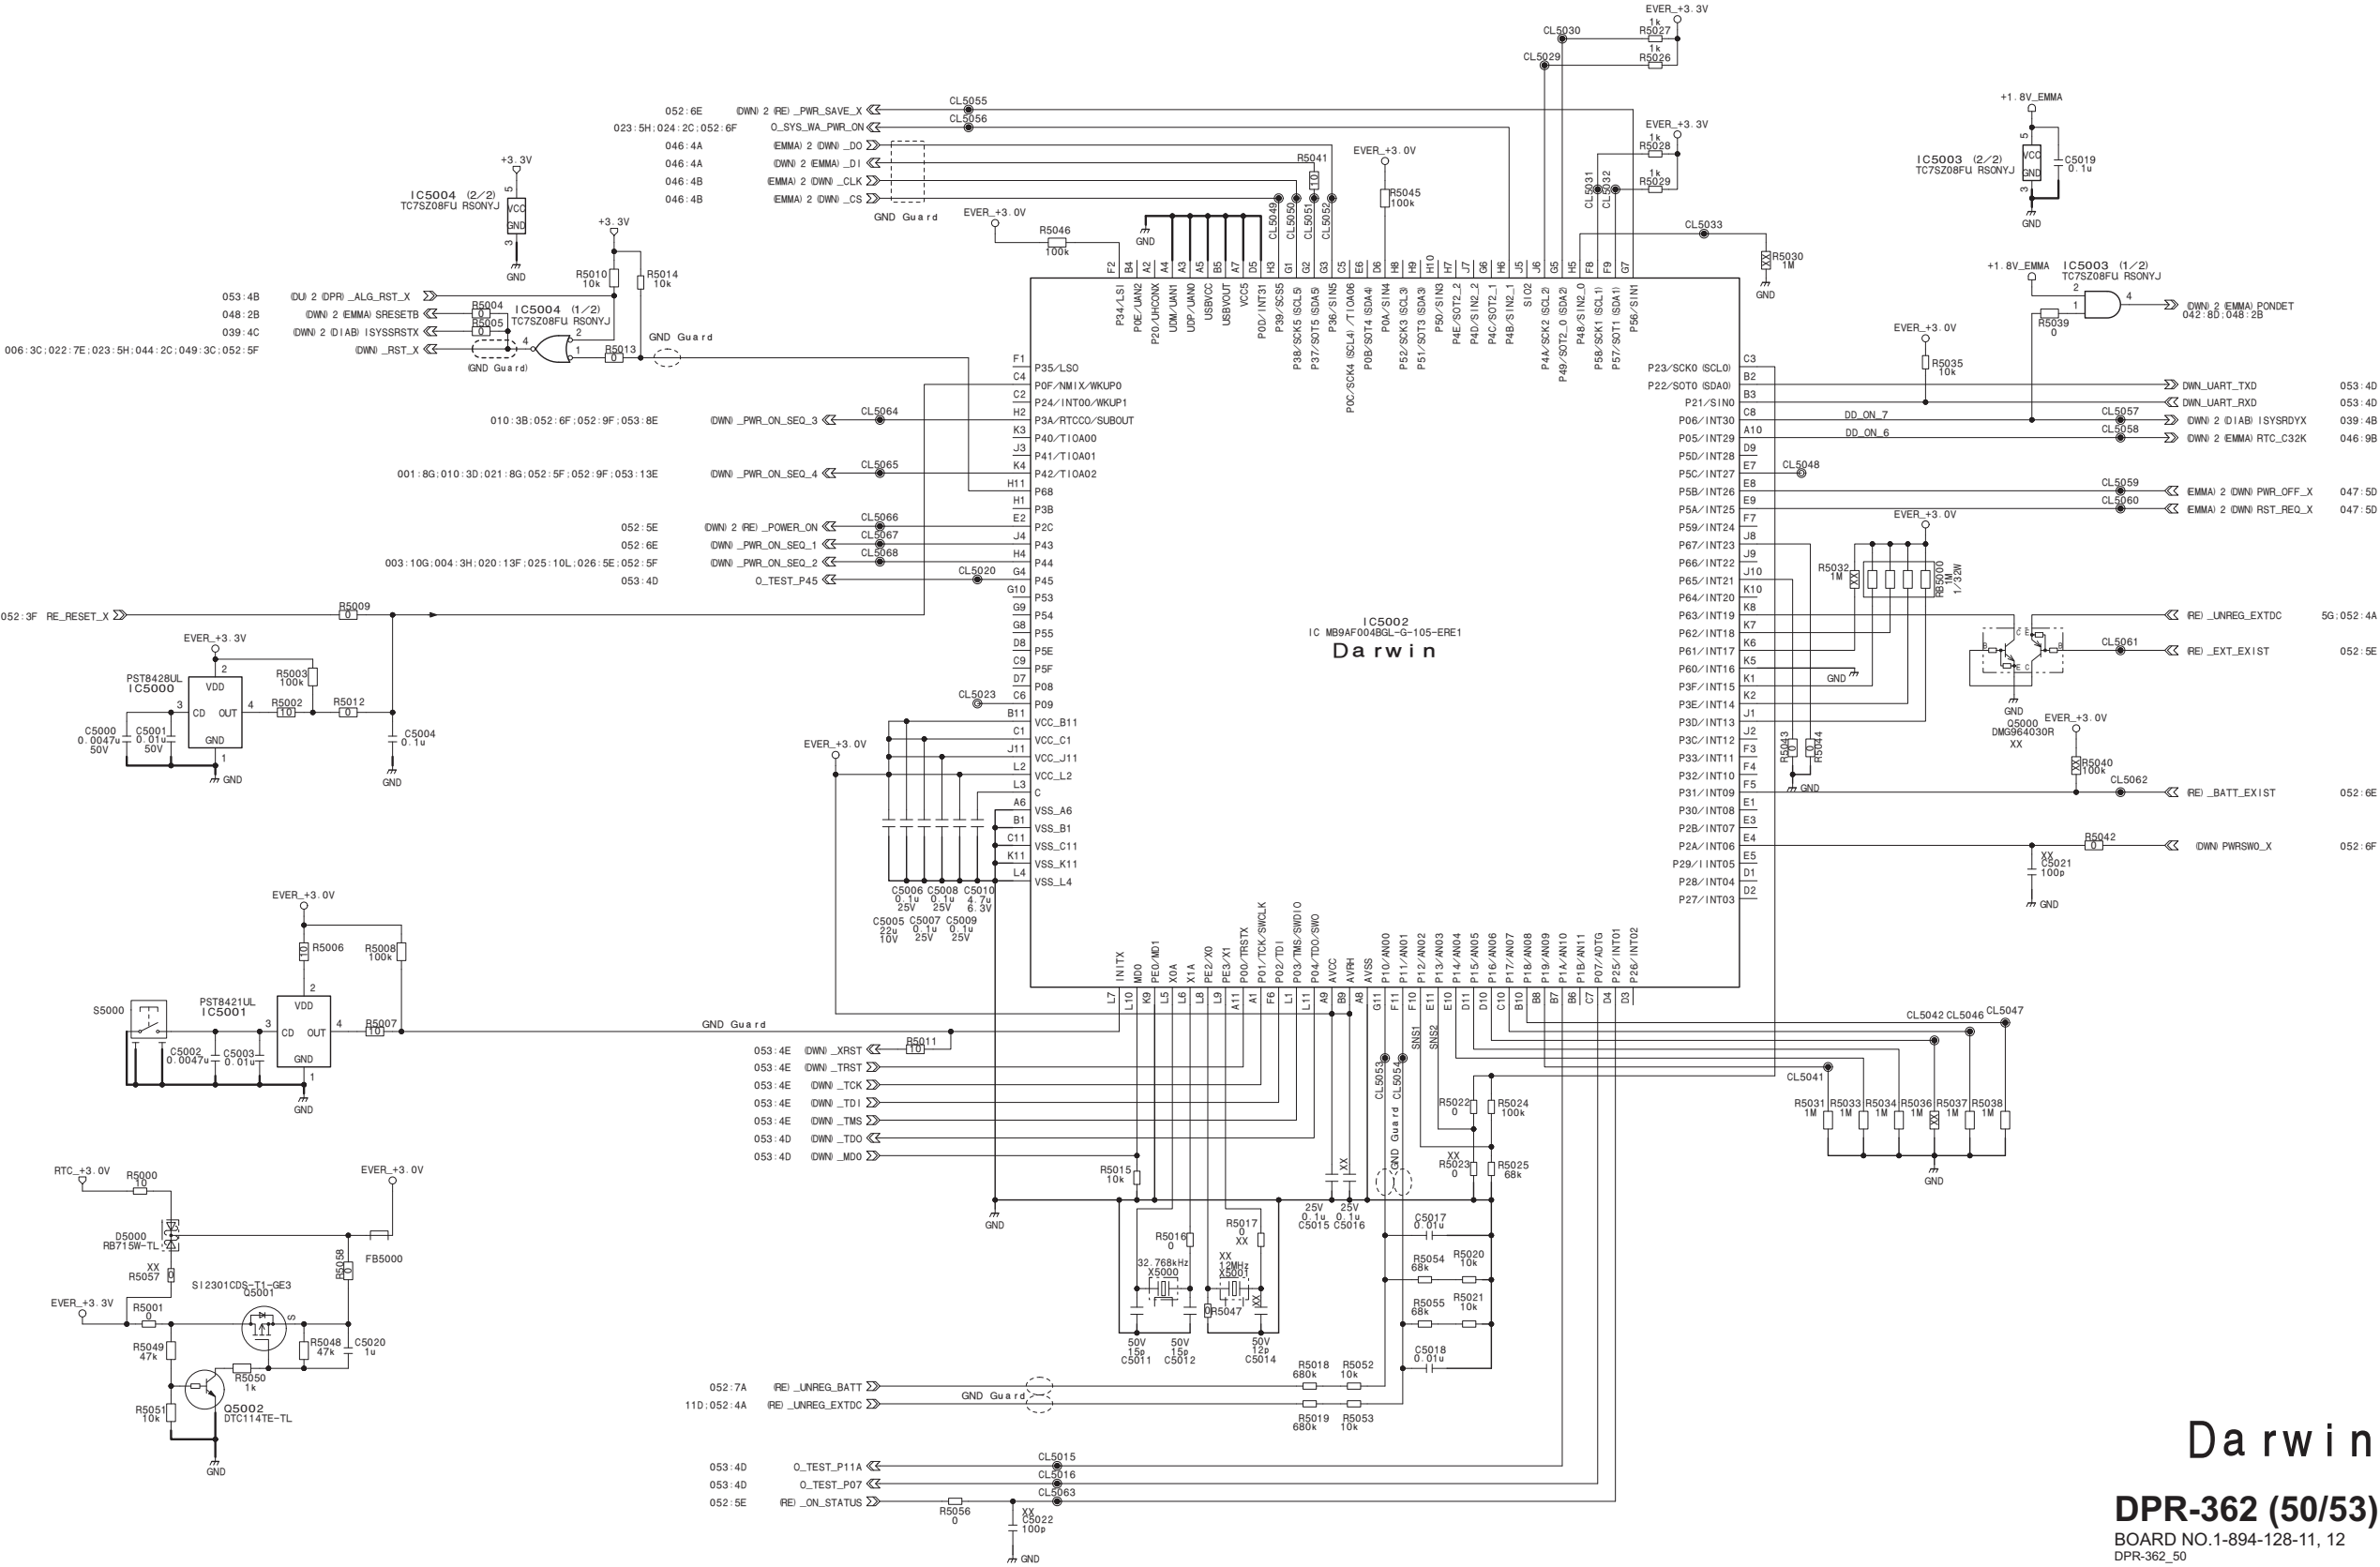

DPR-362 (51/53)


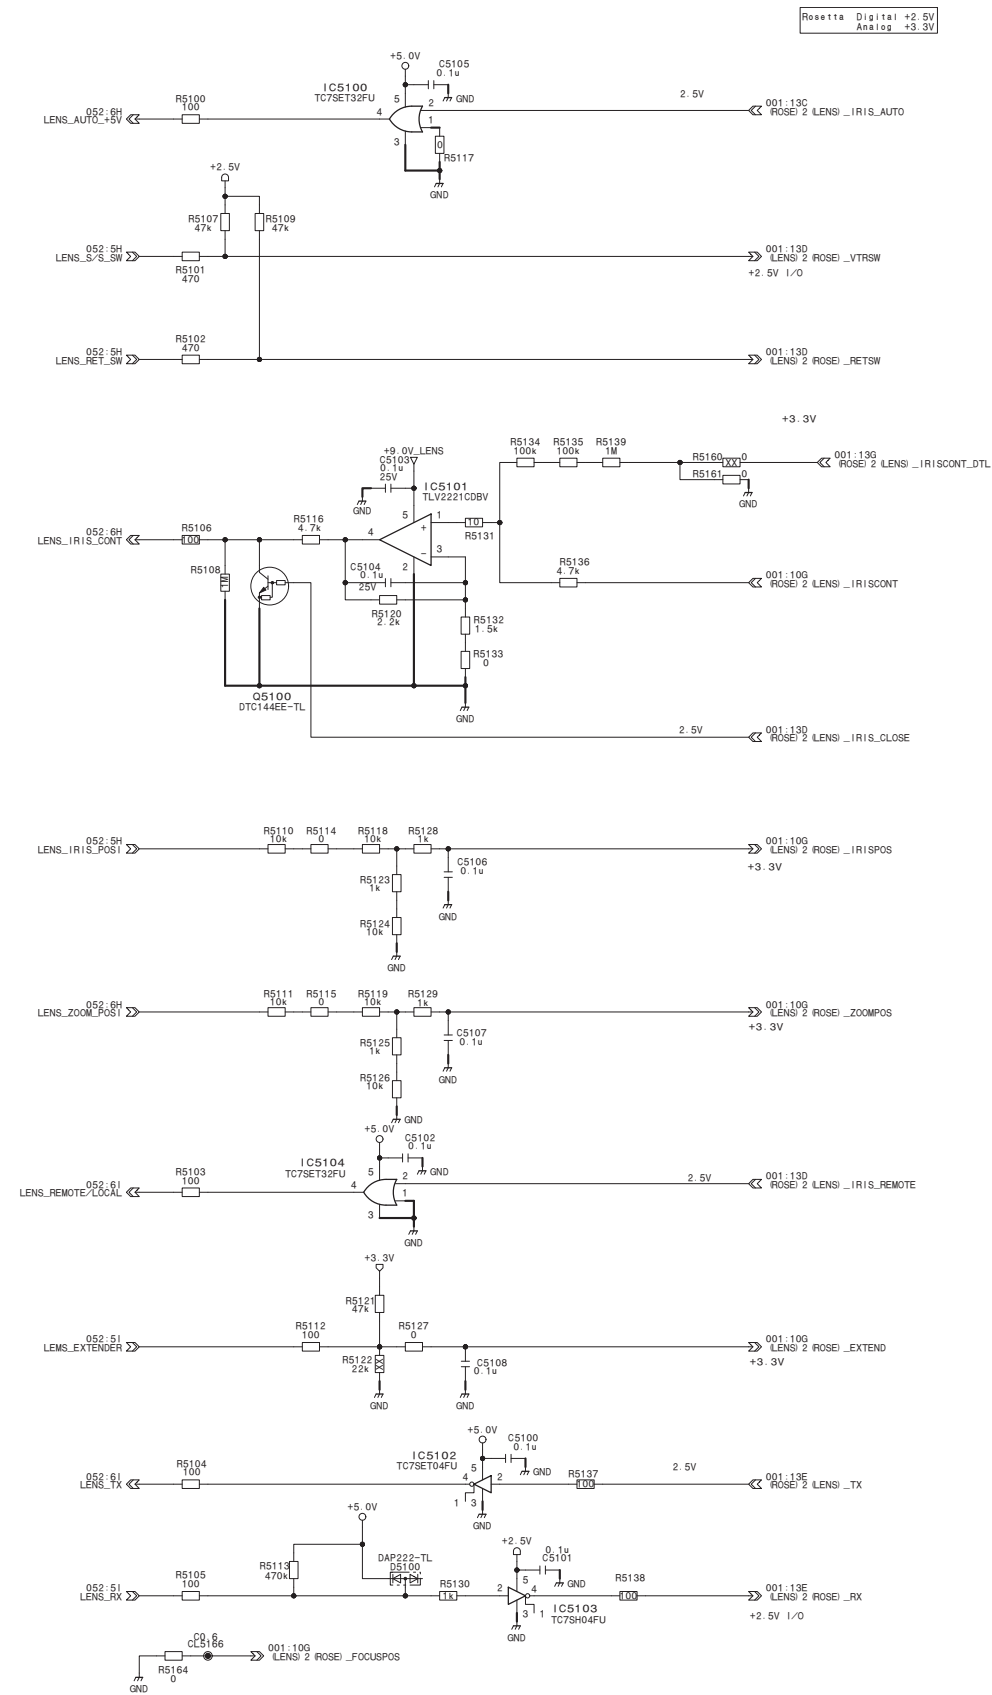


12pin LENS

DPR-362 (51/53)

BOARD NO.1-894-128-11, 12
DPR-362_51

To MB-1210 Board

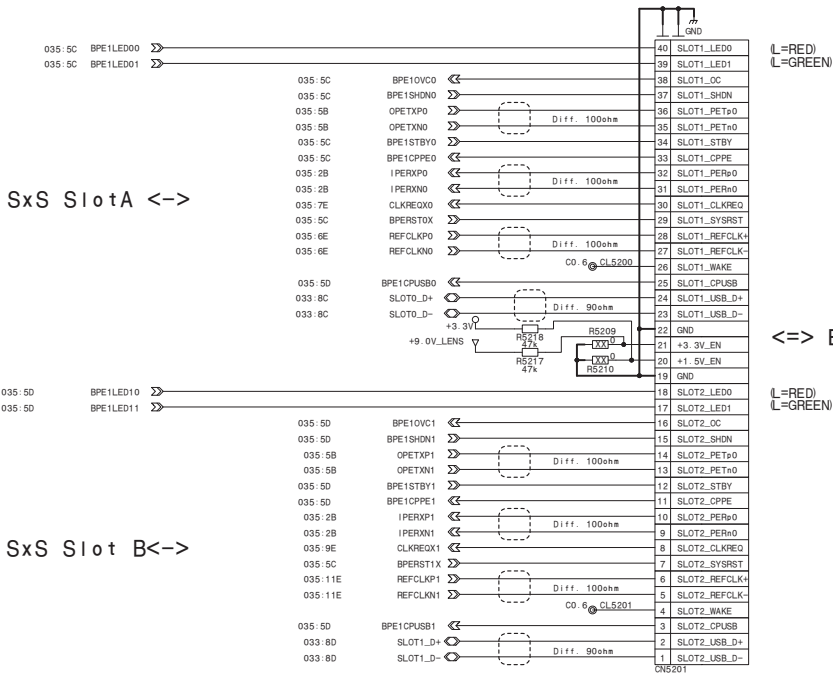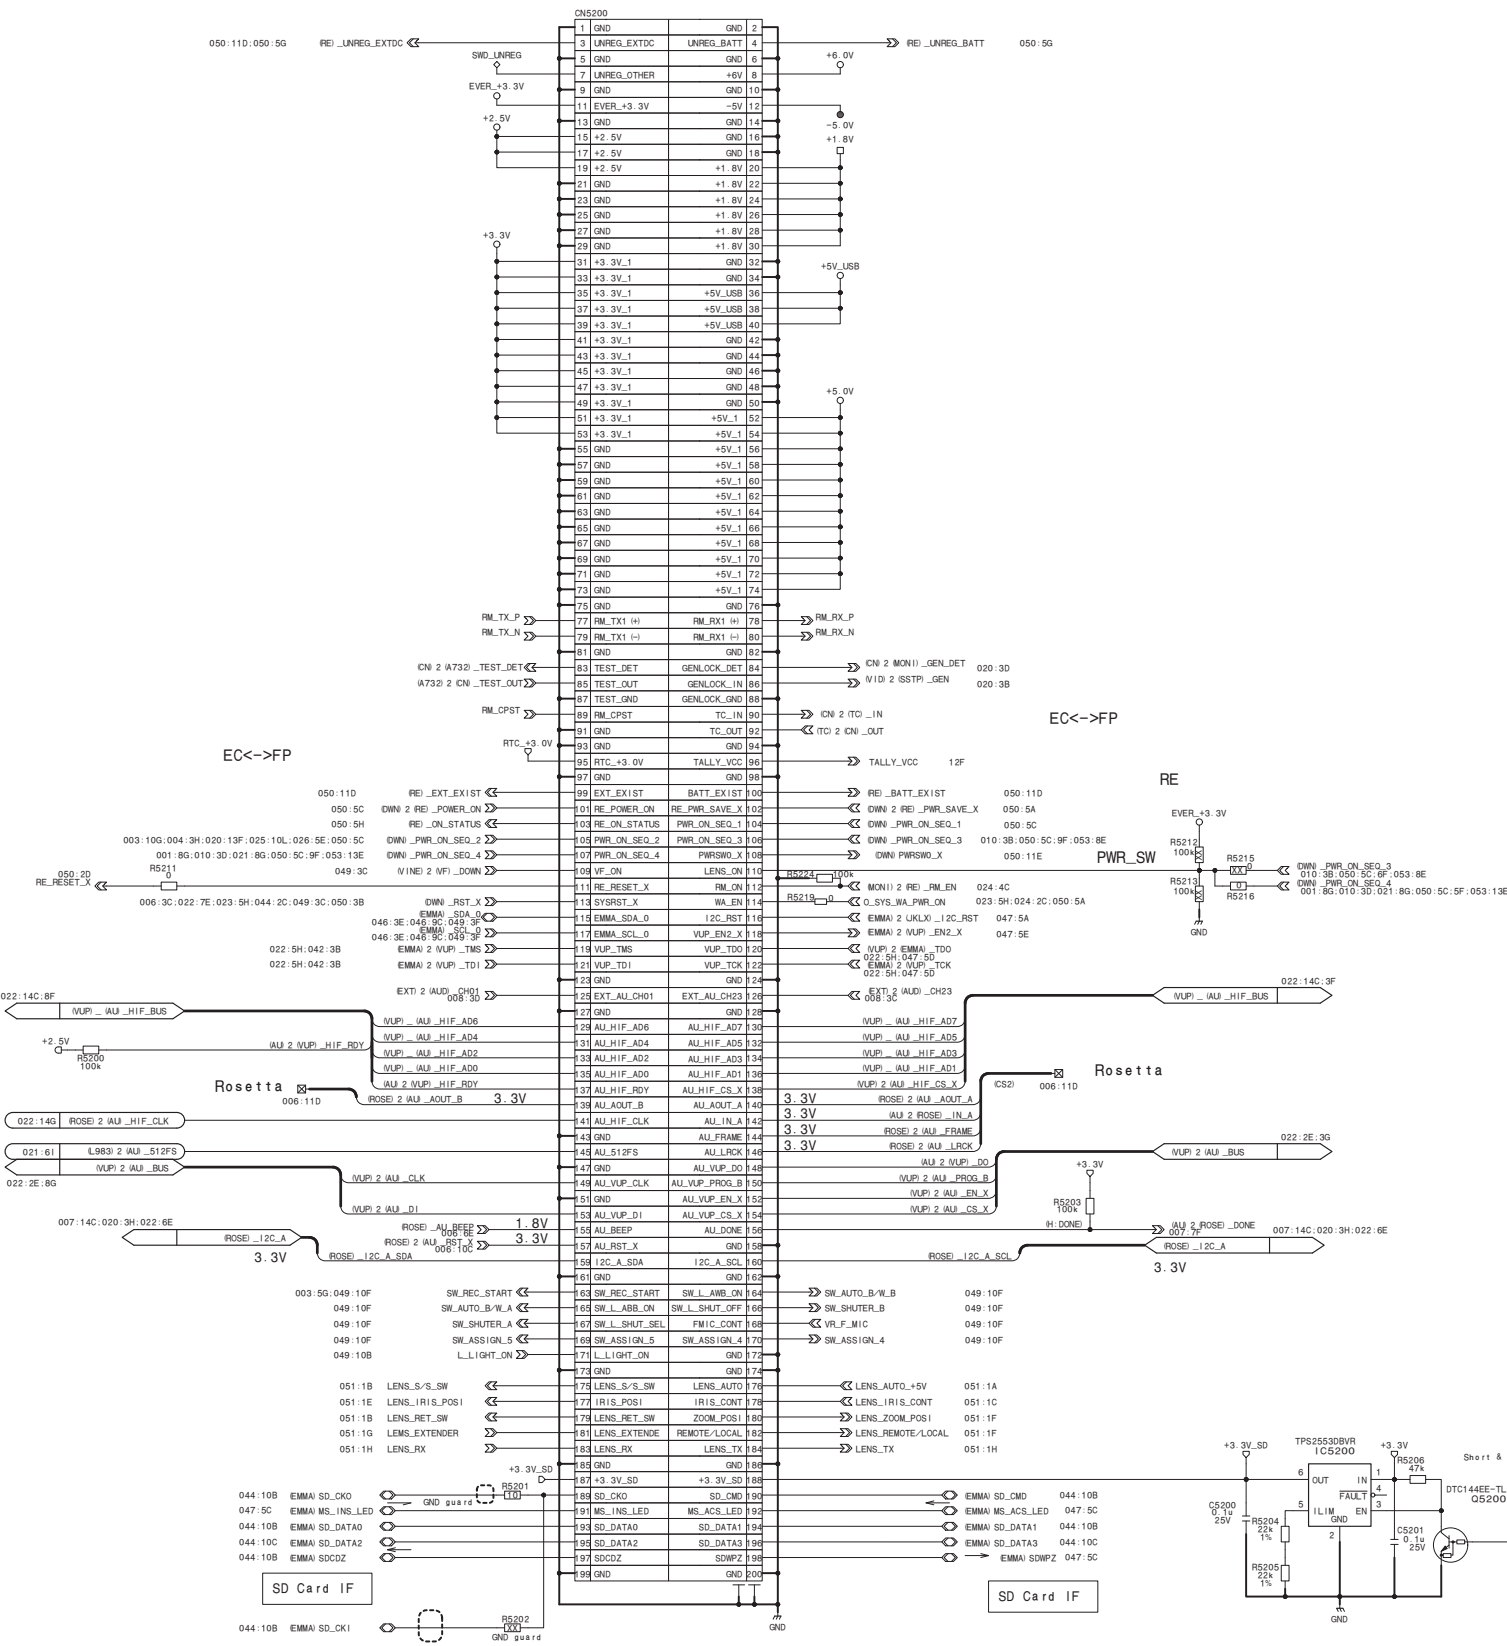


USB2.0 Host<->

MB-1210<->

USB3.0 Host<->

USB2.0 Dev.<->

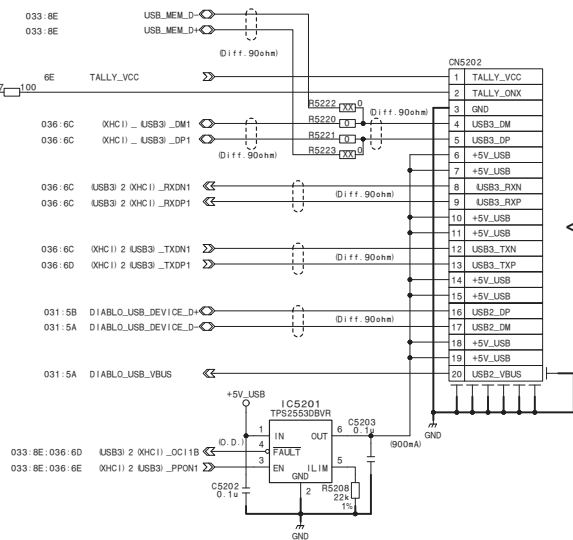

L=RED
L=GREEN


<=> EC-82 Board

L=RED
L=GREEN

<=> LED-529 Board




MB IF/SxS/USB CN
DPR-362 (52/53)
BOARD NO.1-894-128-11, 12
DPR-362_52

DPR-362 (53/53)

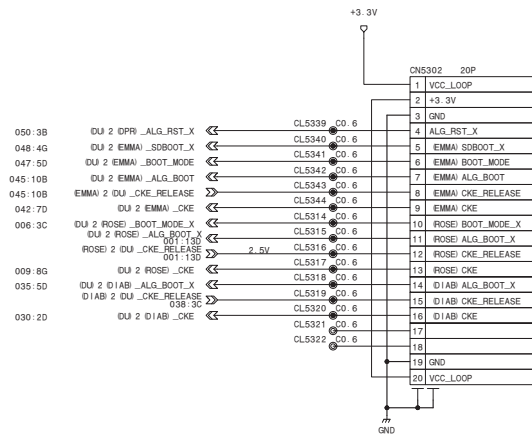



Memory Dump

Factory Use

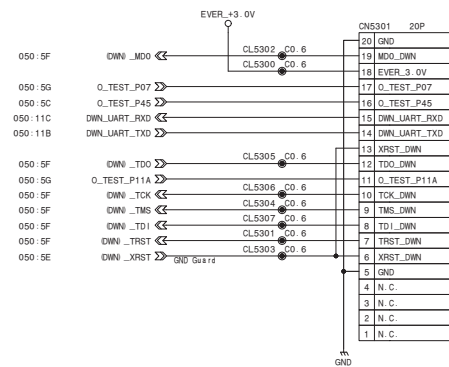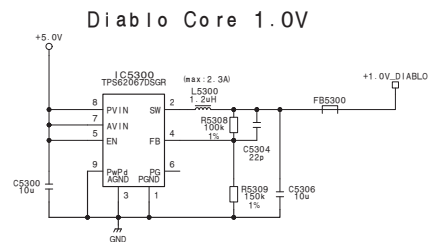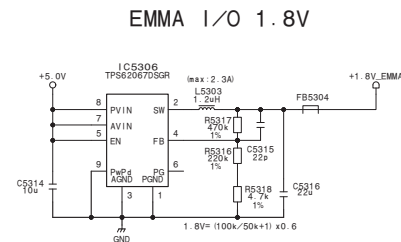


Factory Use

Darwin (ICE) <->

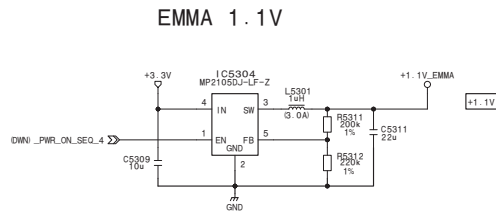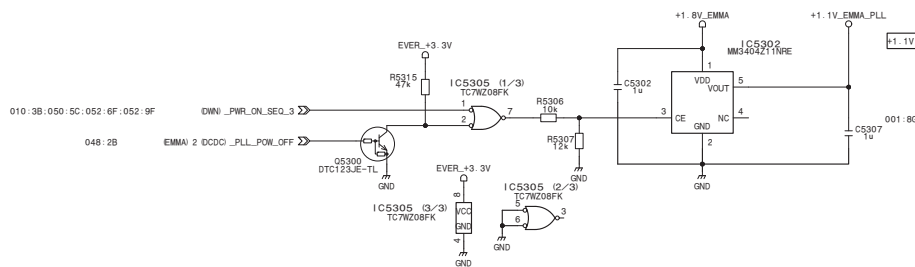

VFVINE (Flash Writer) <->

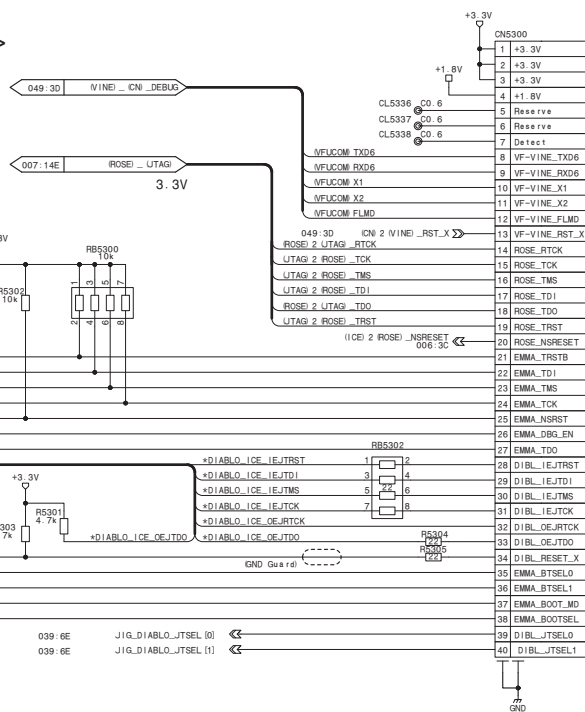


(ICE CN)

Factory Use




Rosetta (Debug) <->

EMMA (Debug) <->

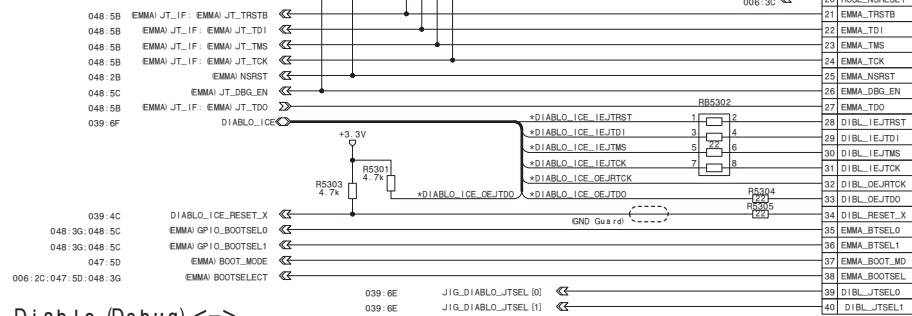


Diablo (Debug) <->


12p i n LENS +9V



GND TP
Power/Debug
DPR-362 (53/53)
BOARD NO.1-894-128-11, 12
DPR-362_53


EC-82
EC-82 (1/2)

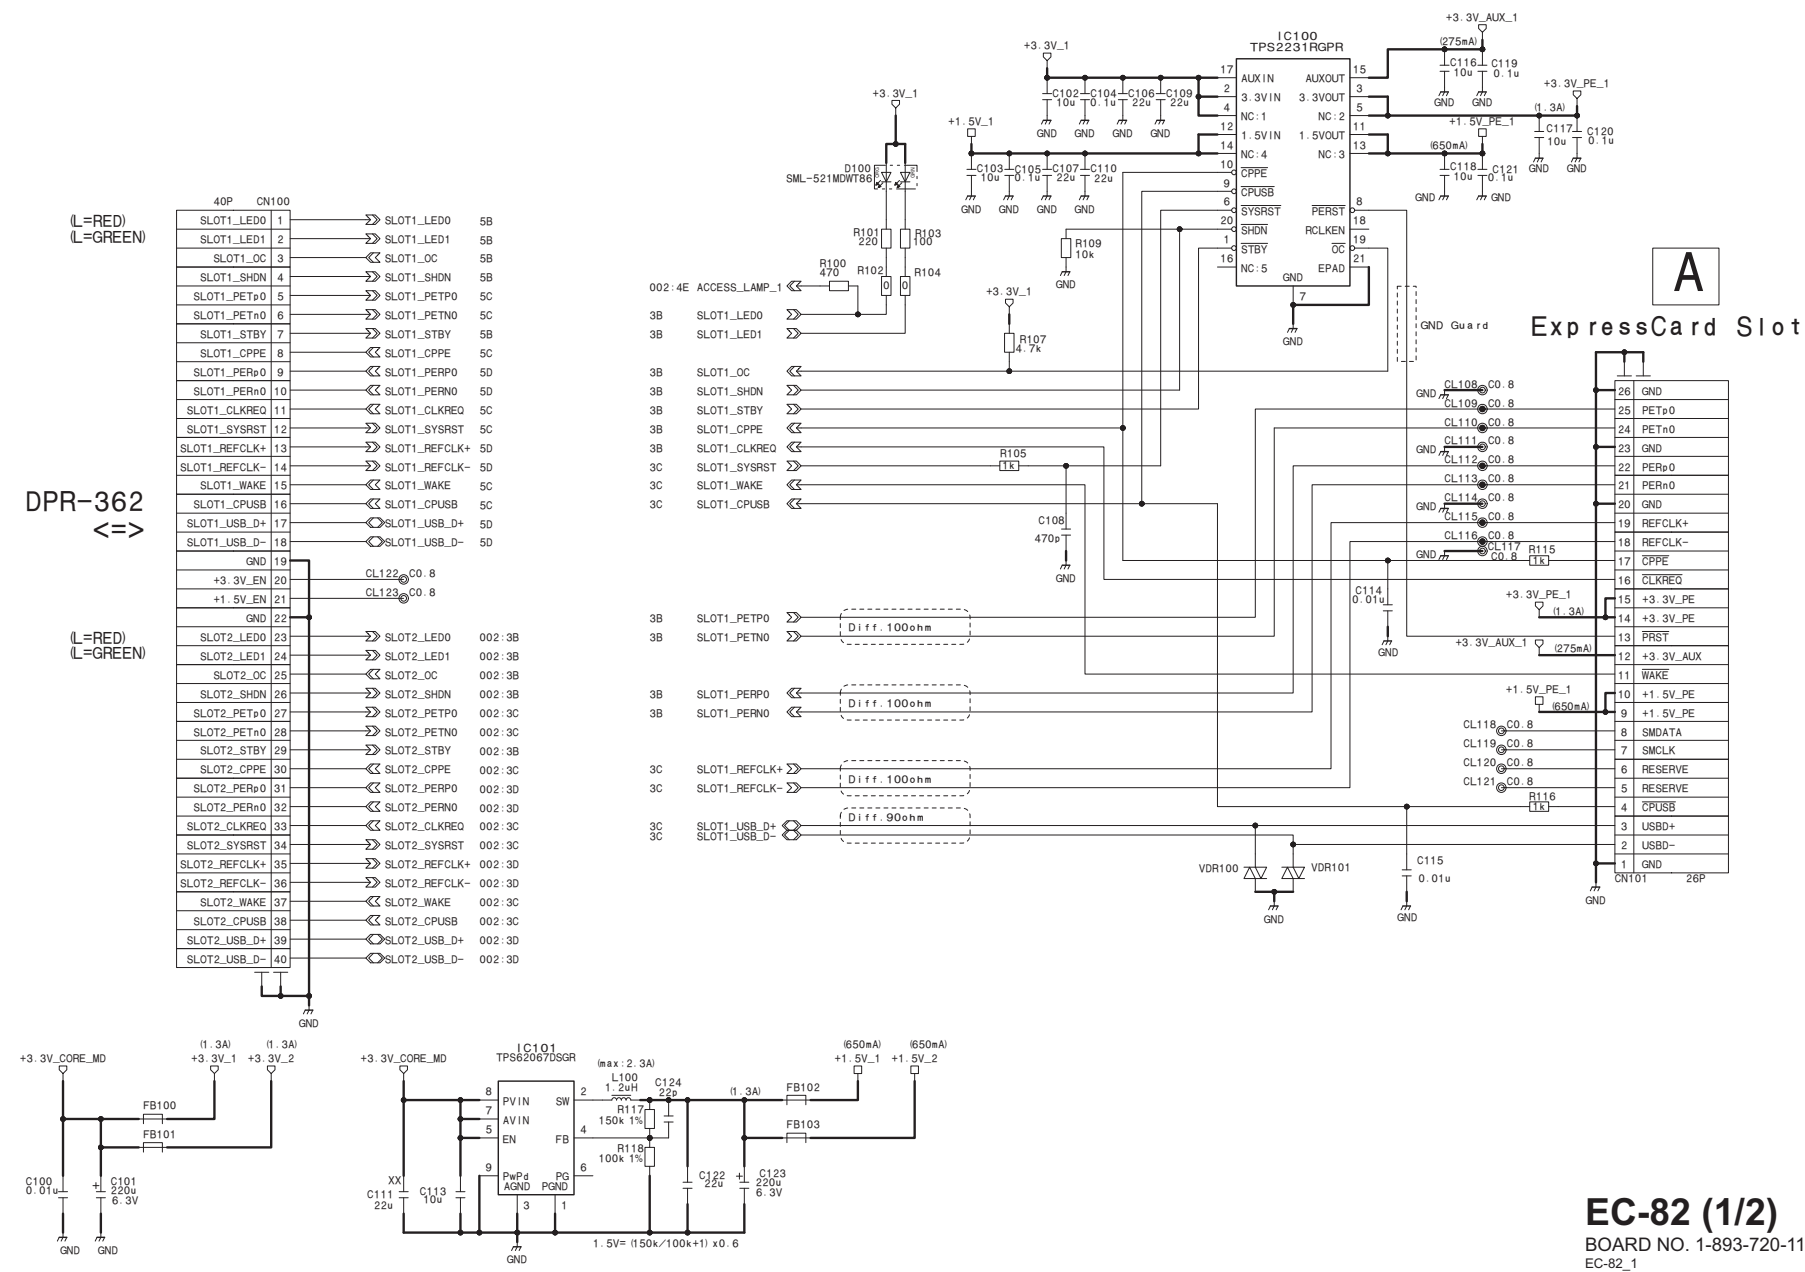

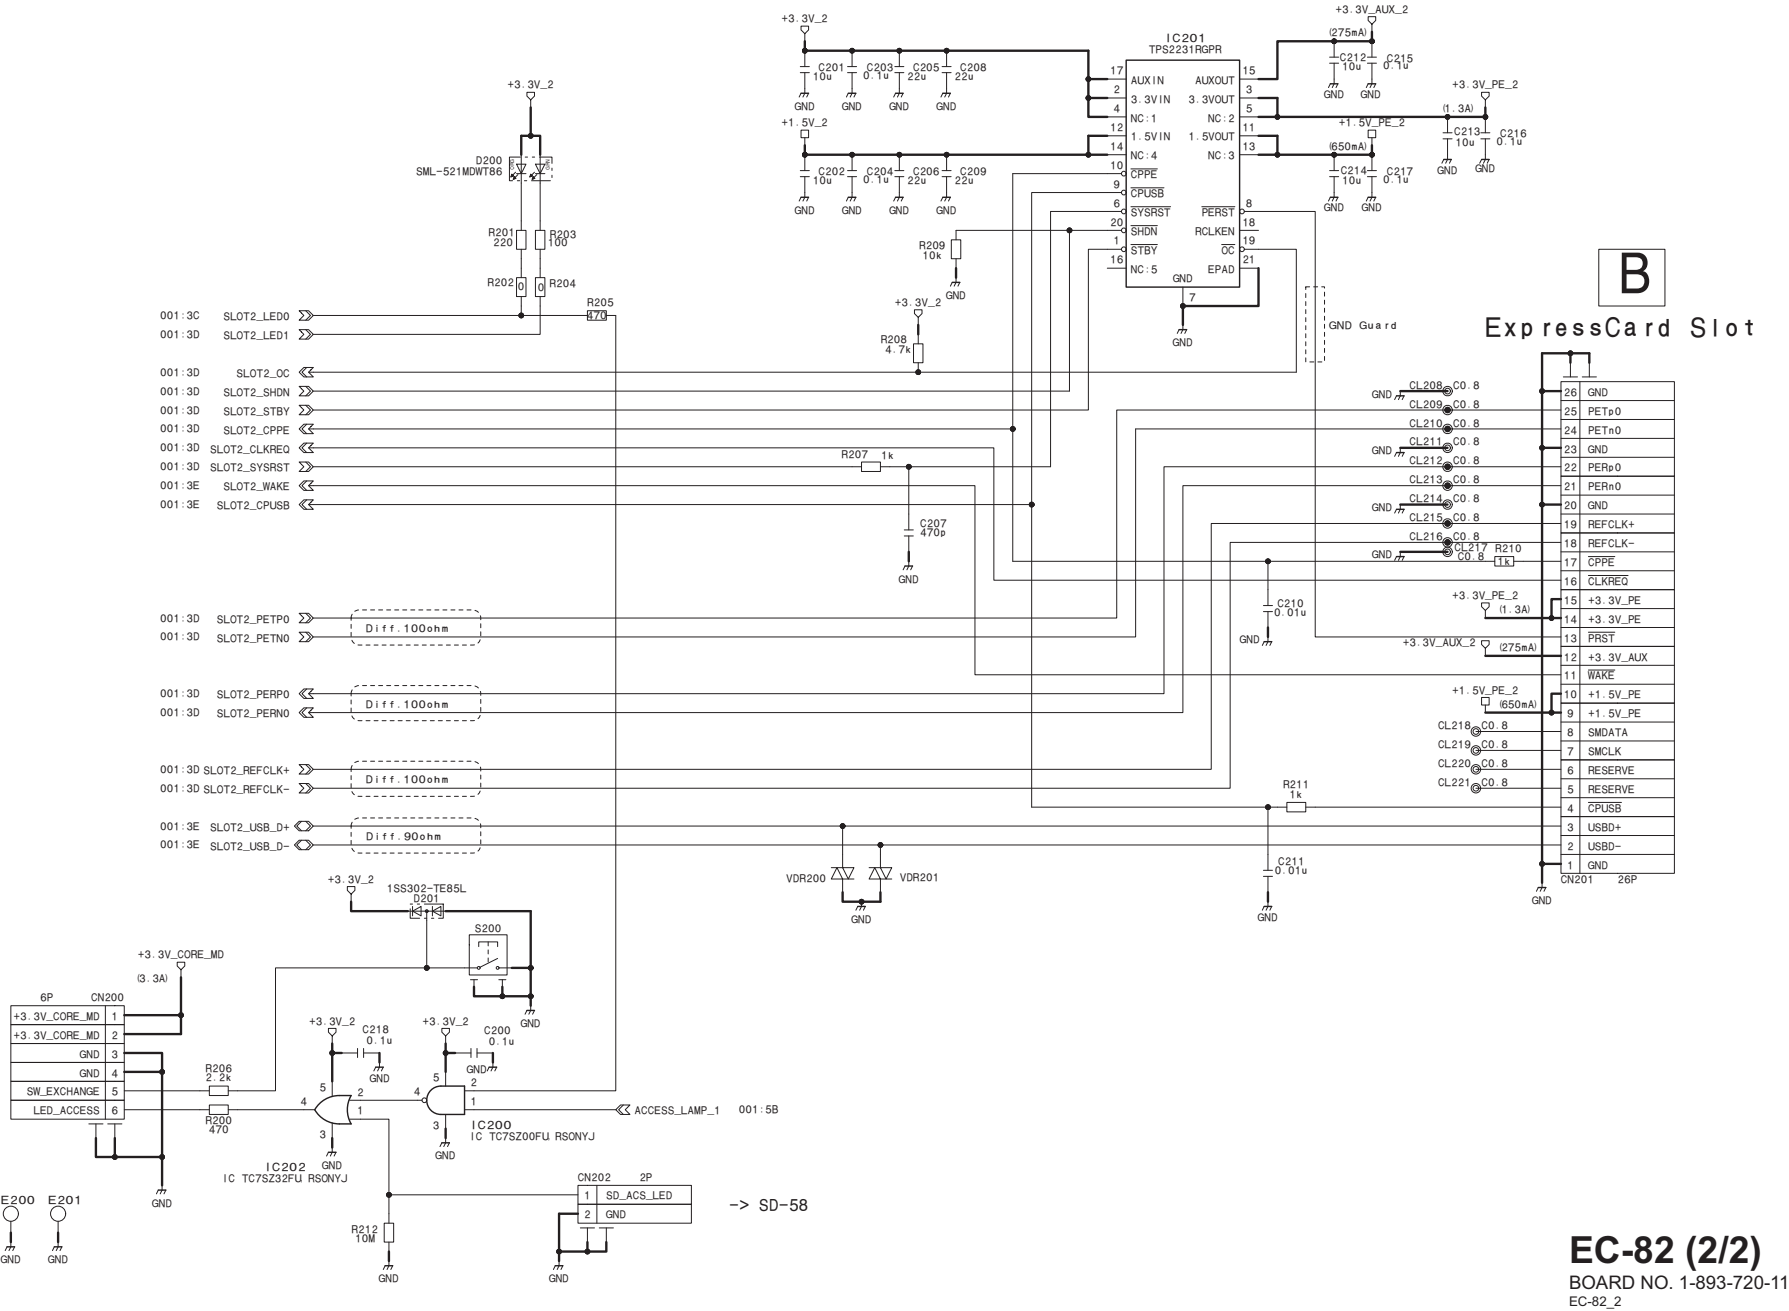



ENC-162

To FP

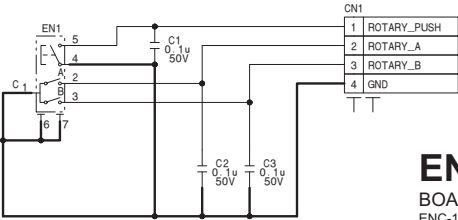




ENC-162
BOARD NO. 1-893-722-11
ENC-162_1


FP-208
FP-208 (1/6)

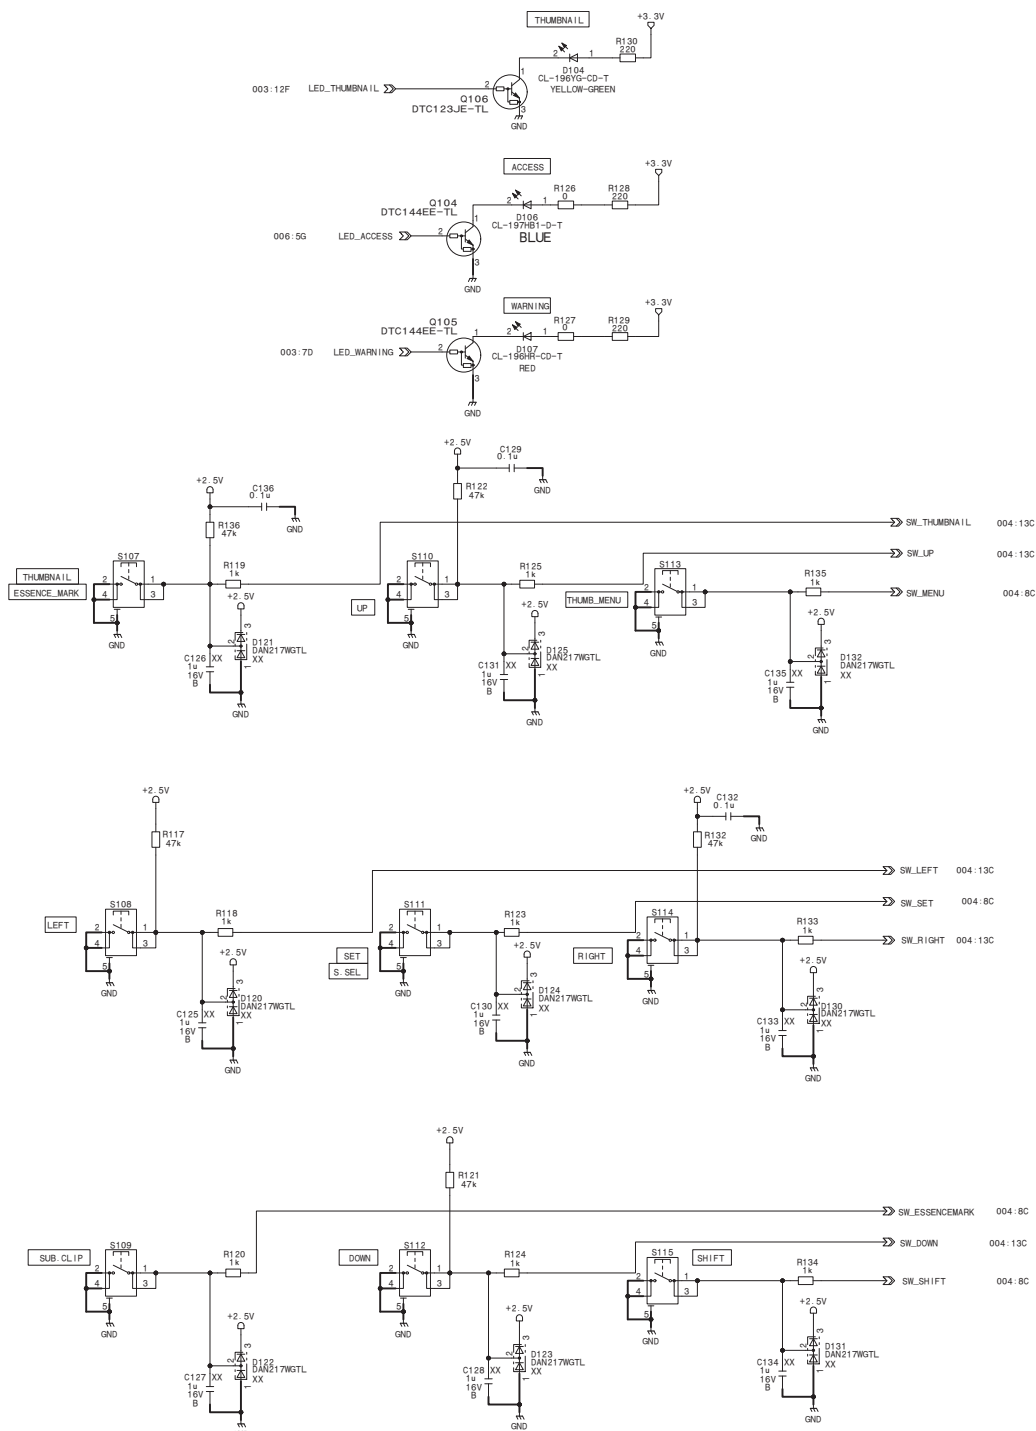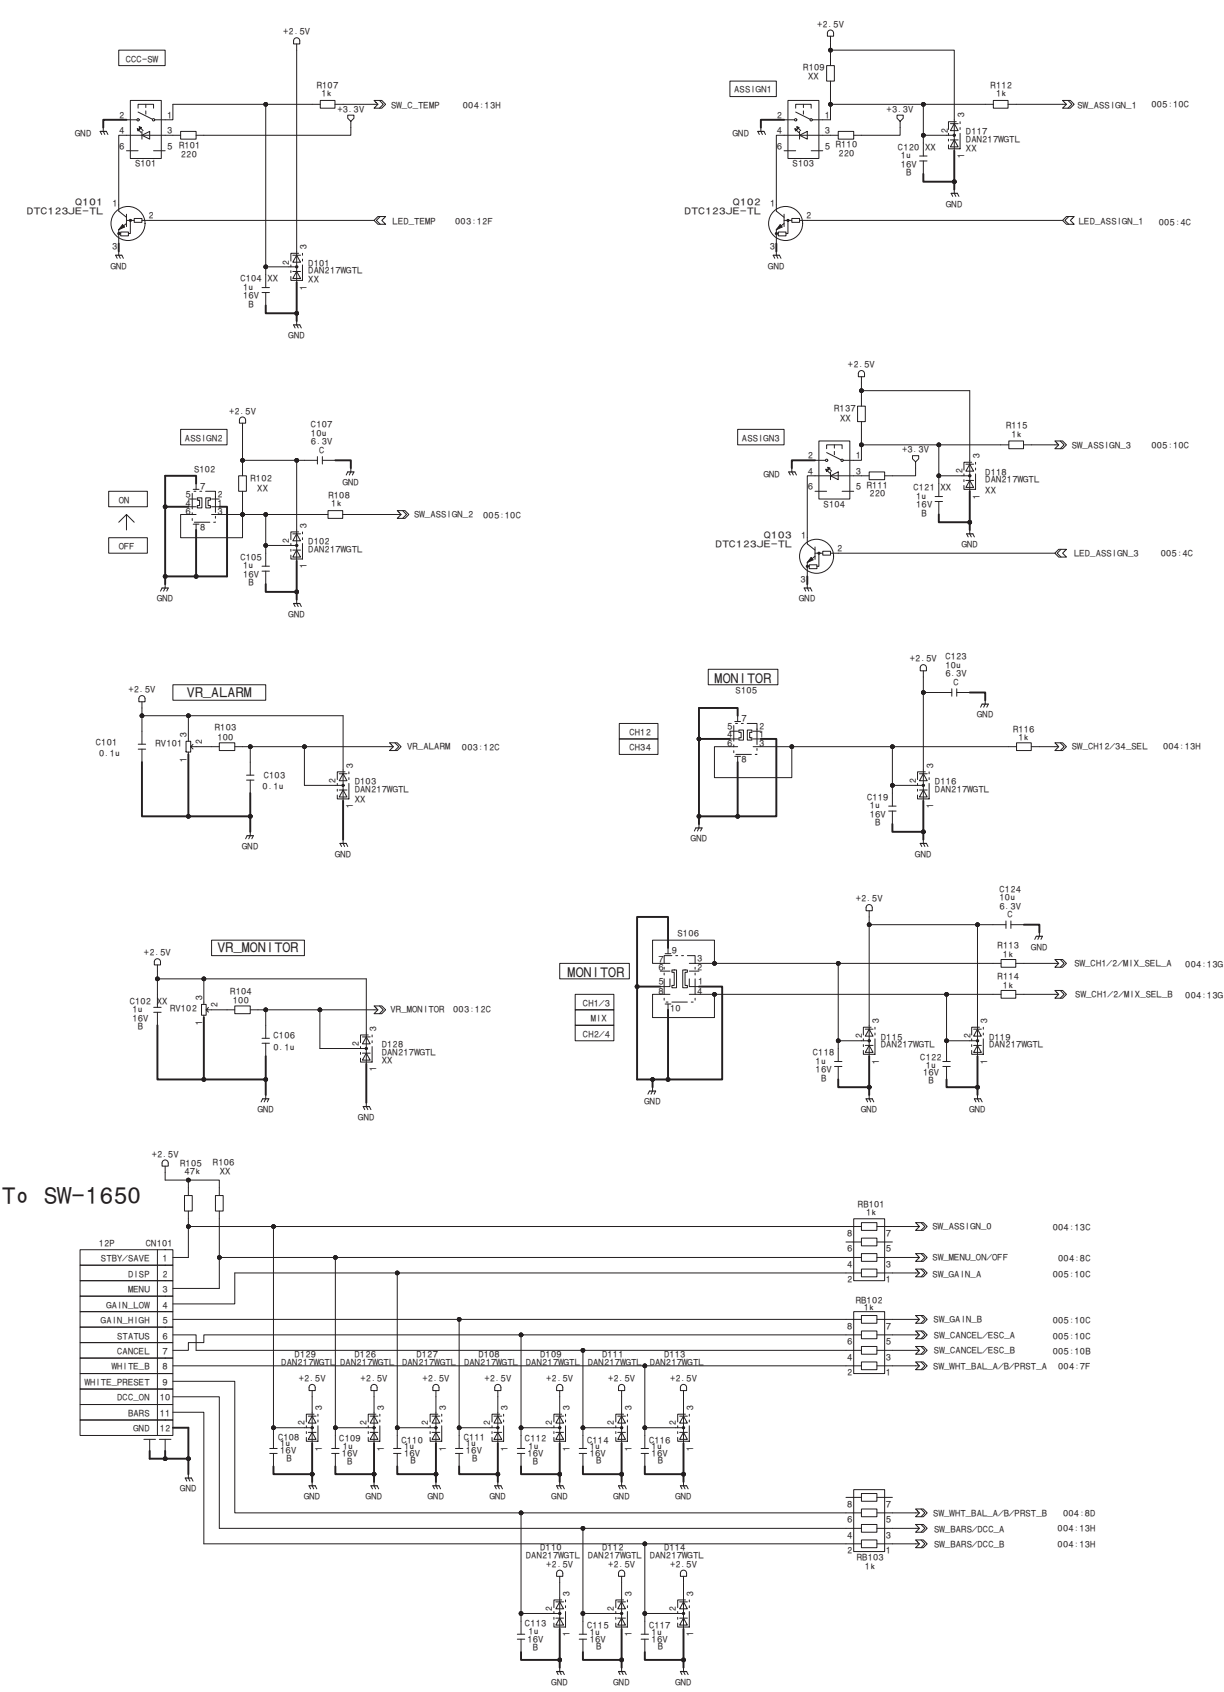



SW1
FP-208 (1/6)
BOARD NO. 1-893-706-11
FP-208_1

FP-208 (2/6)

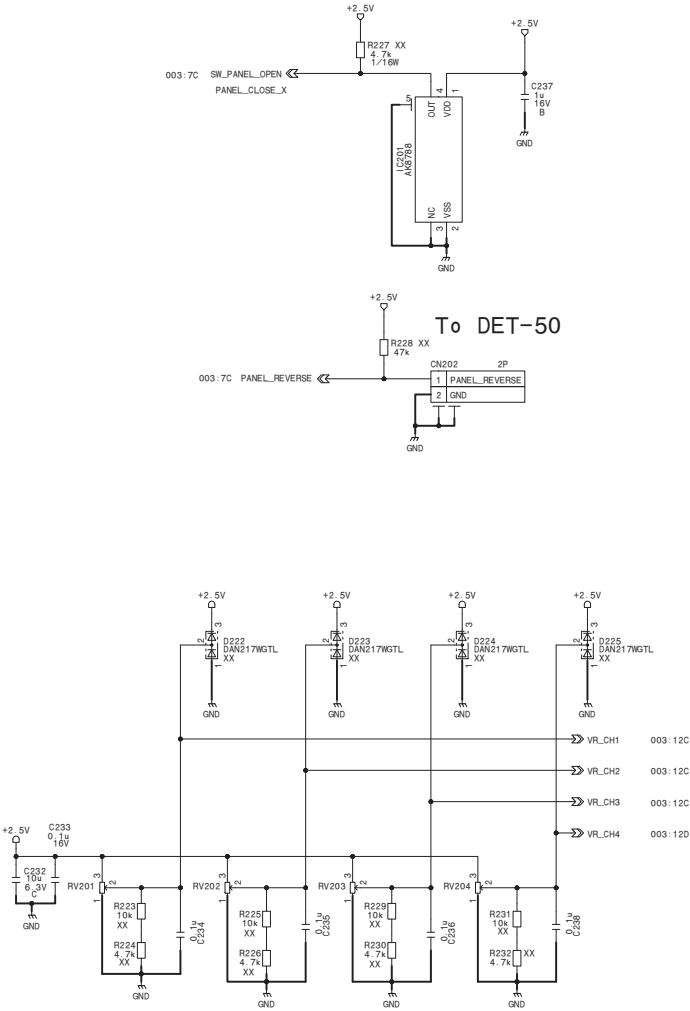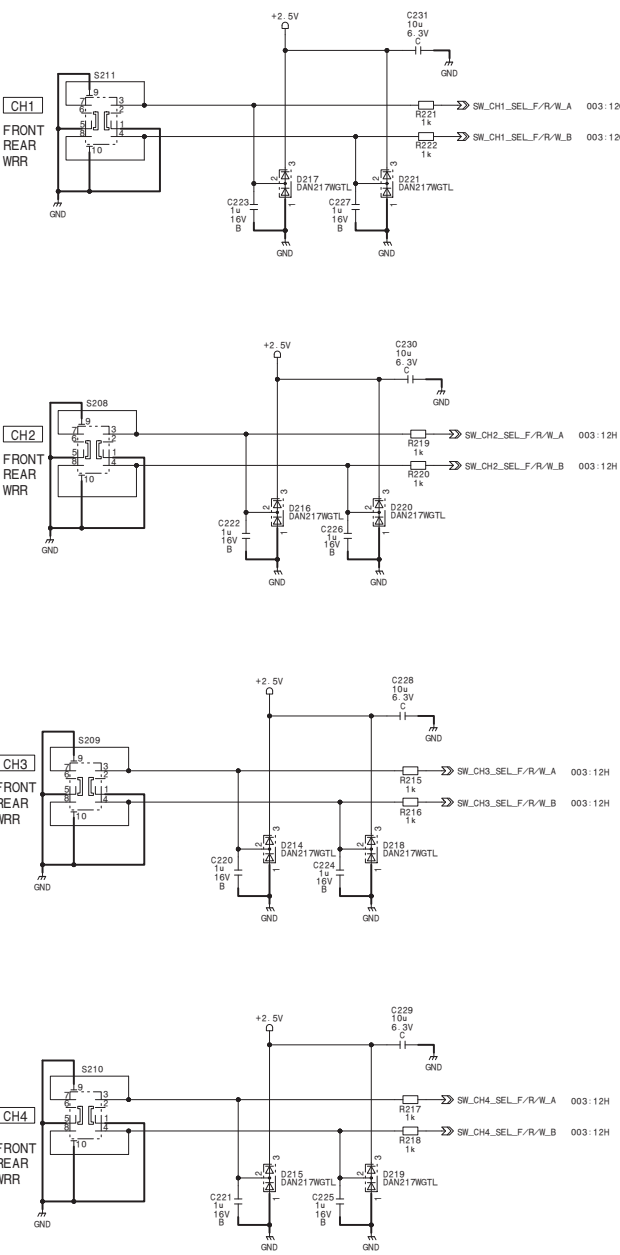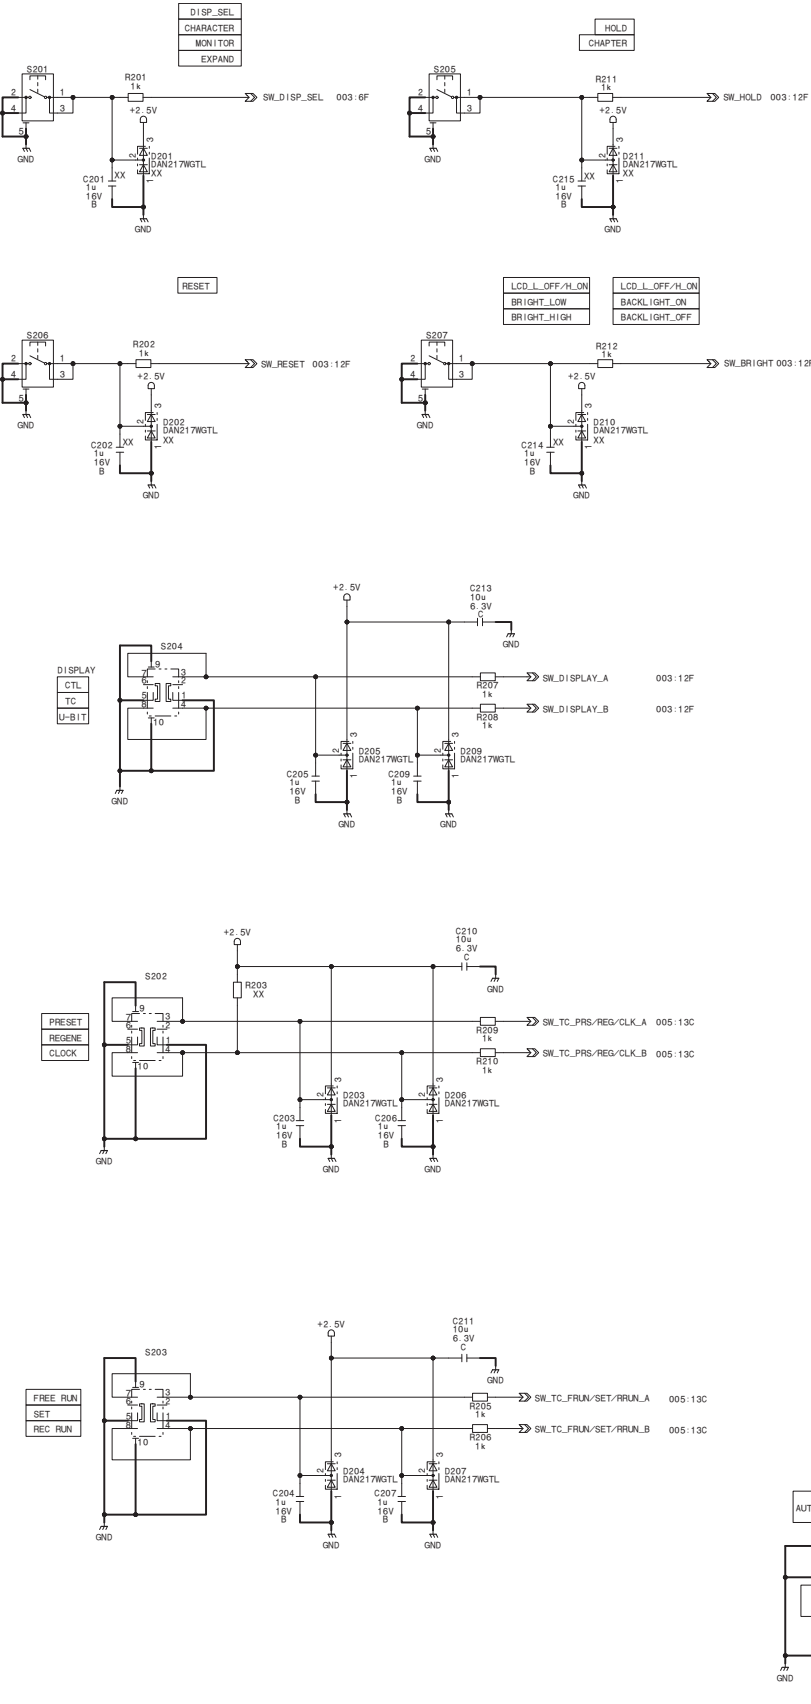

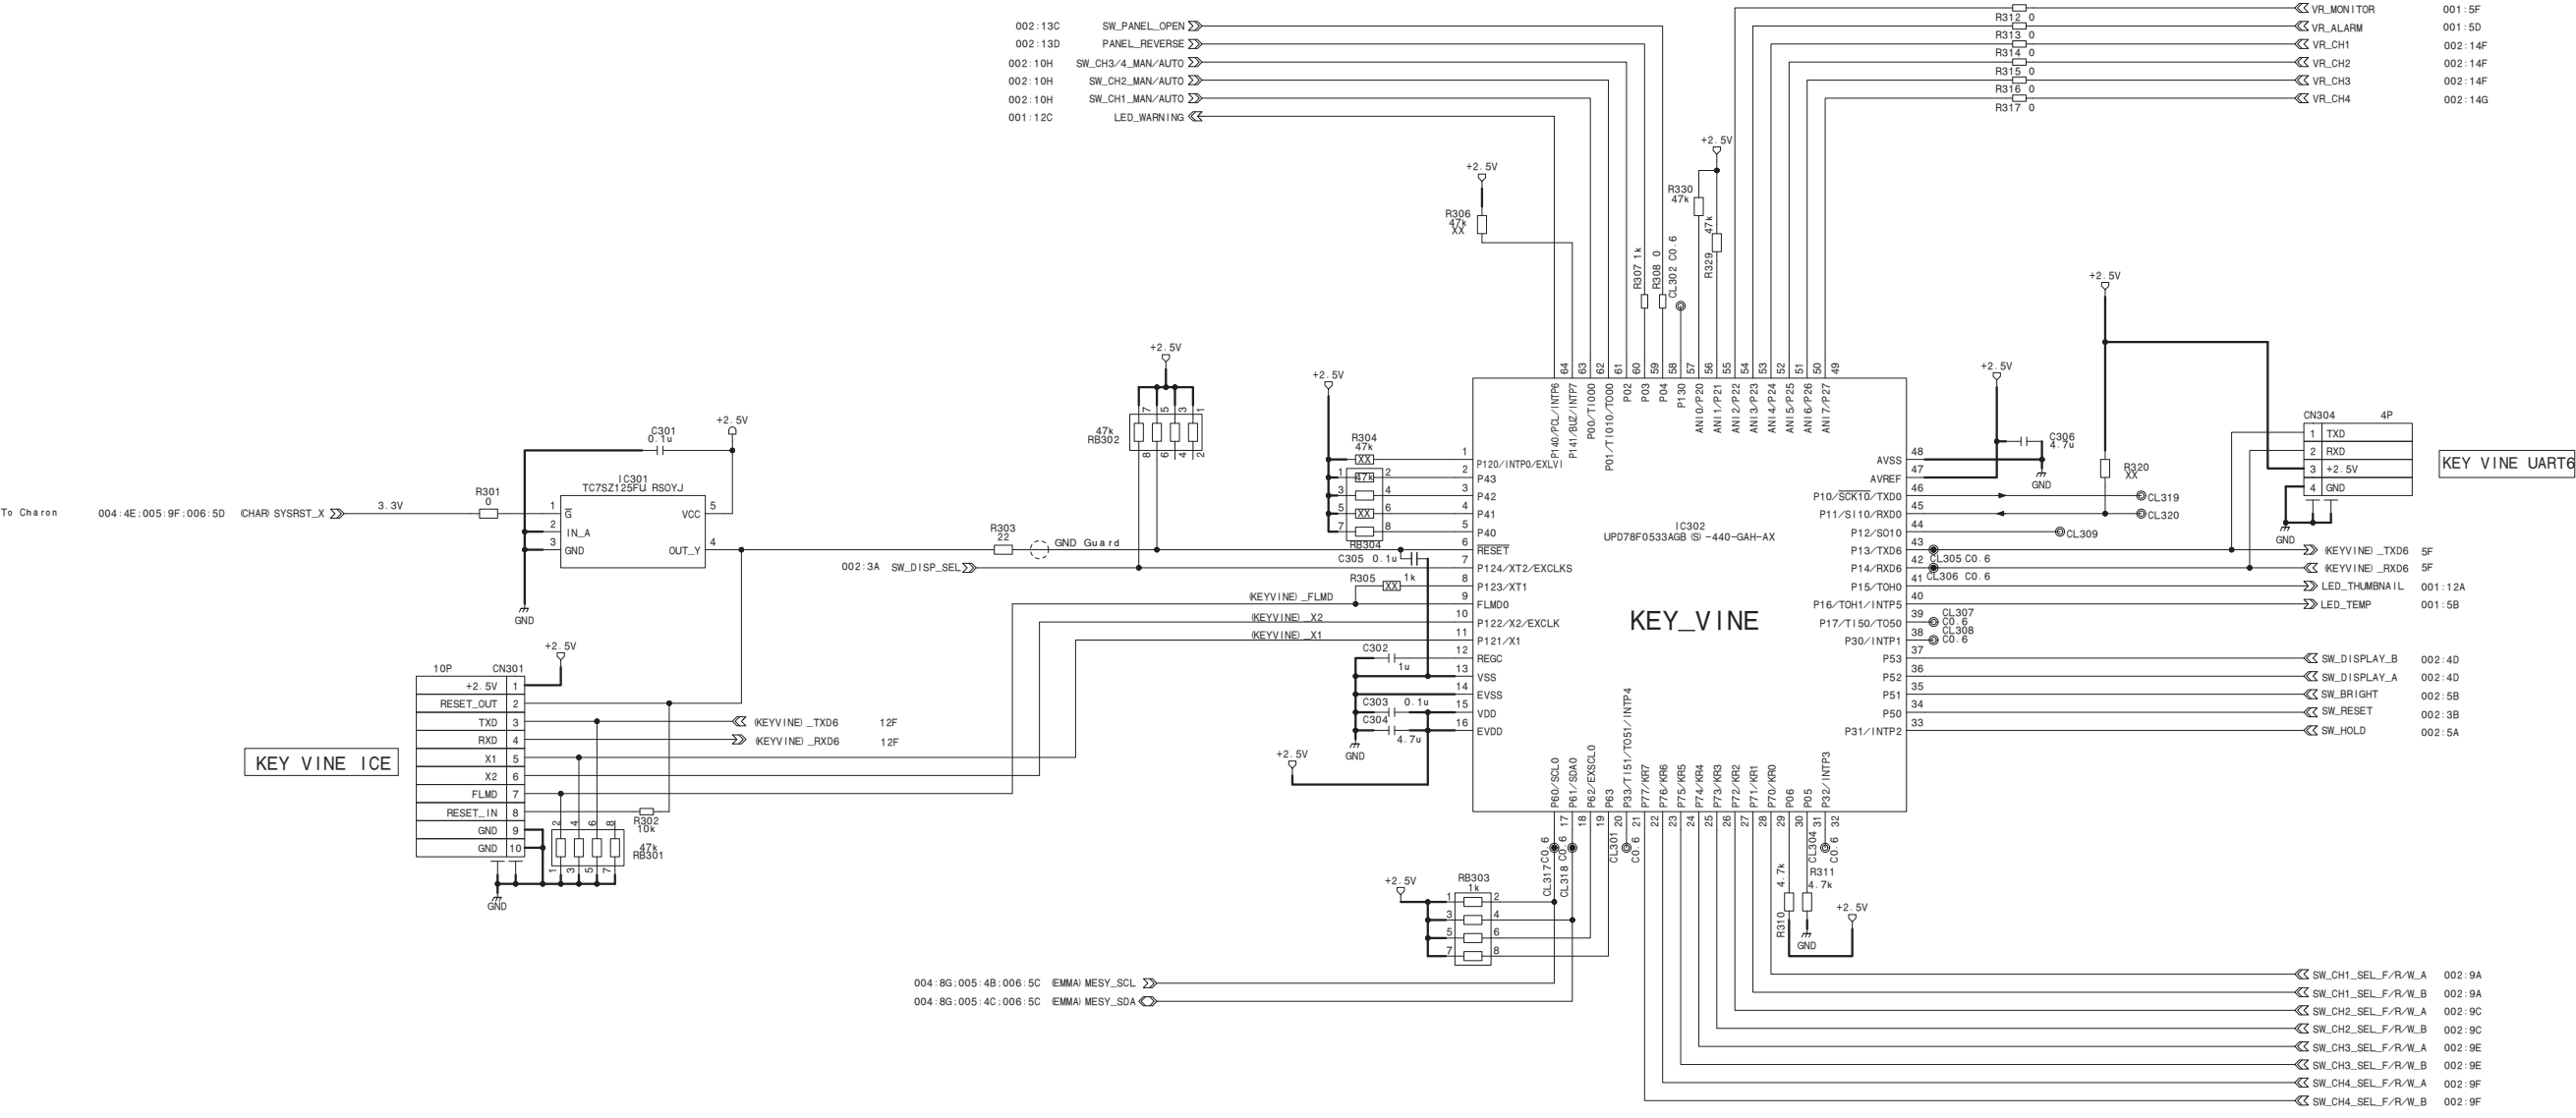

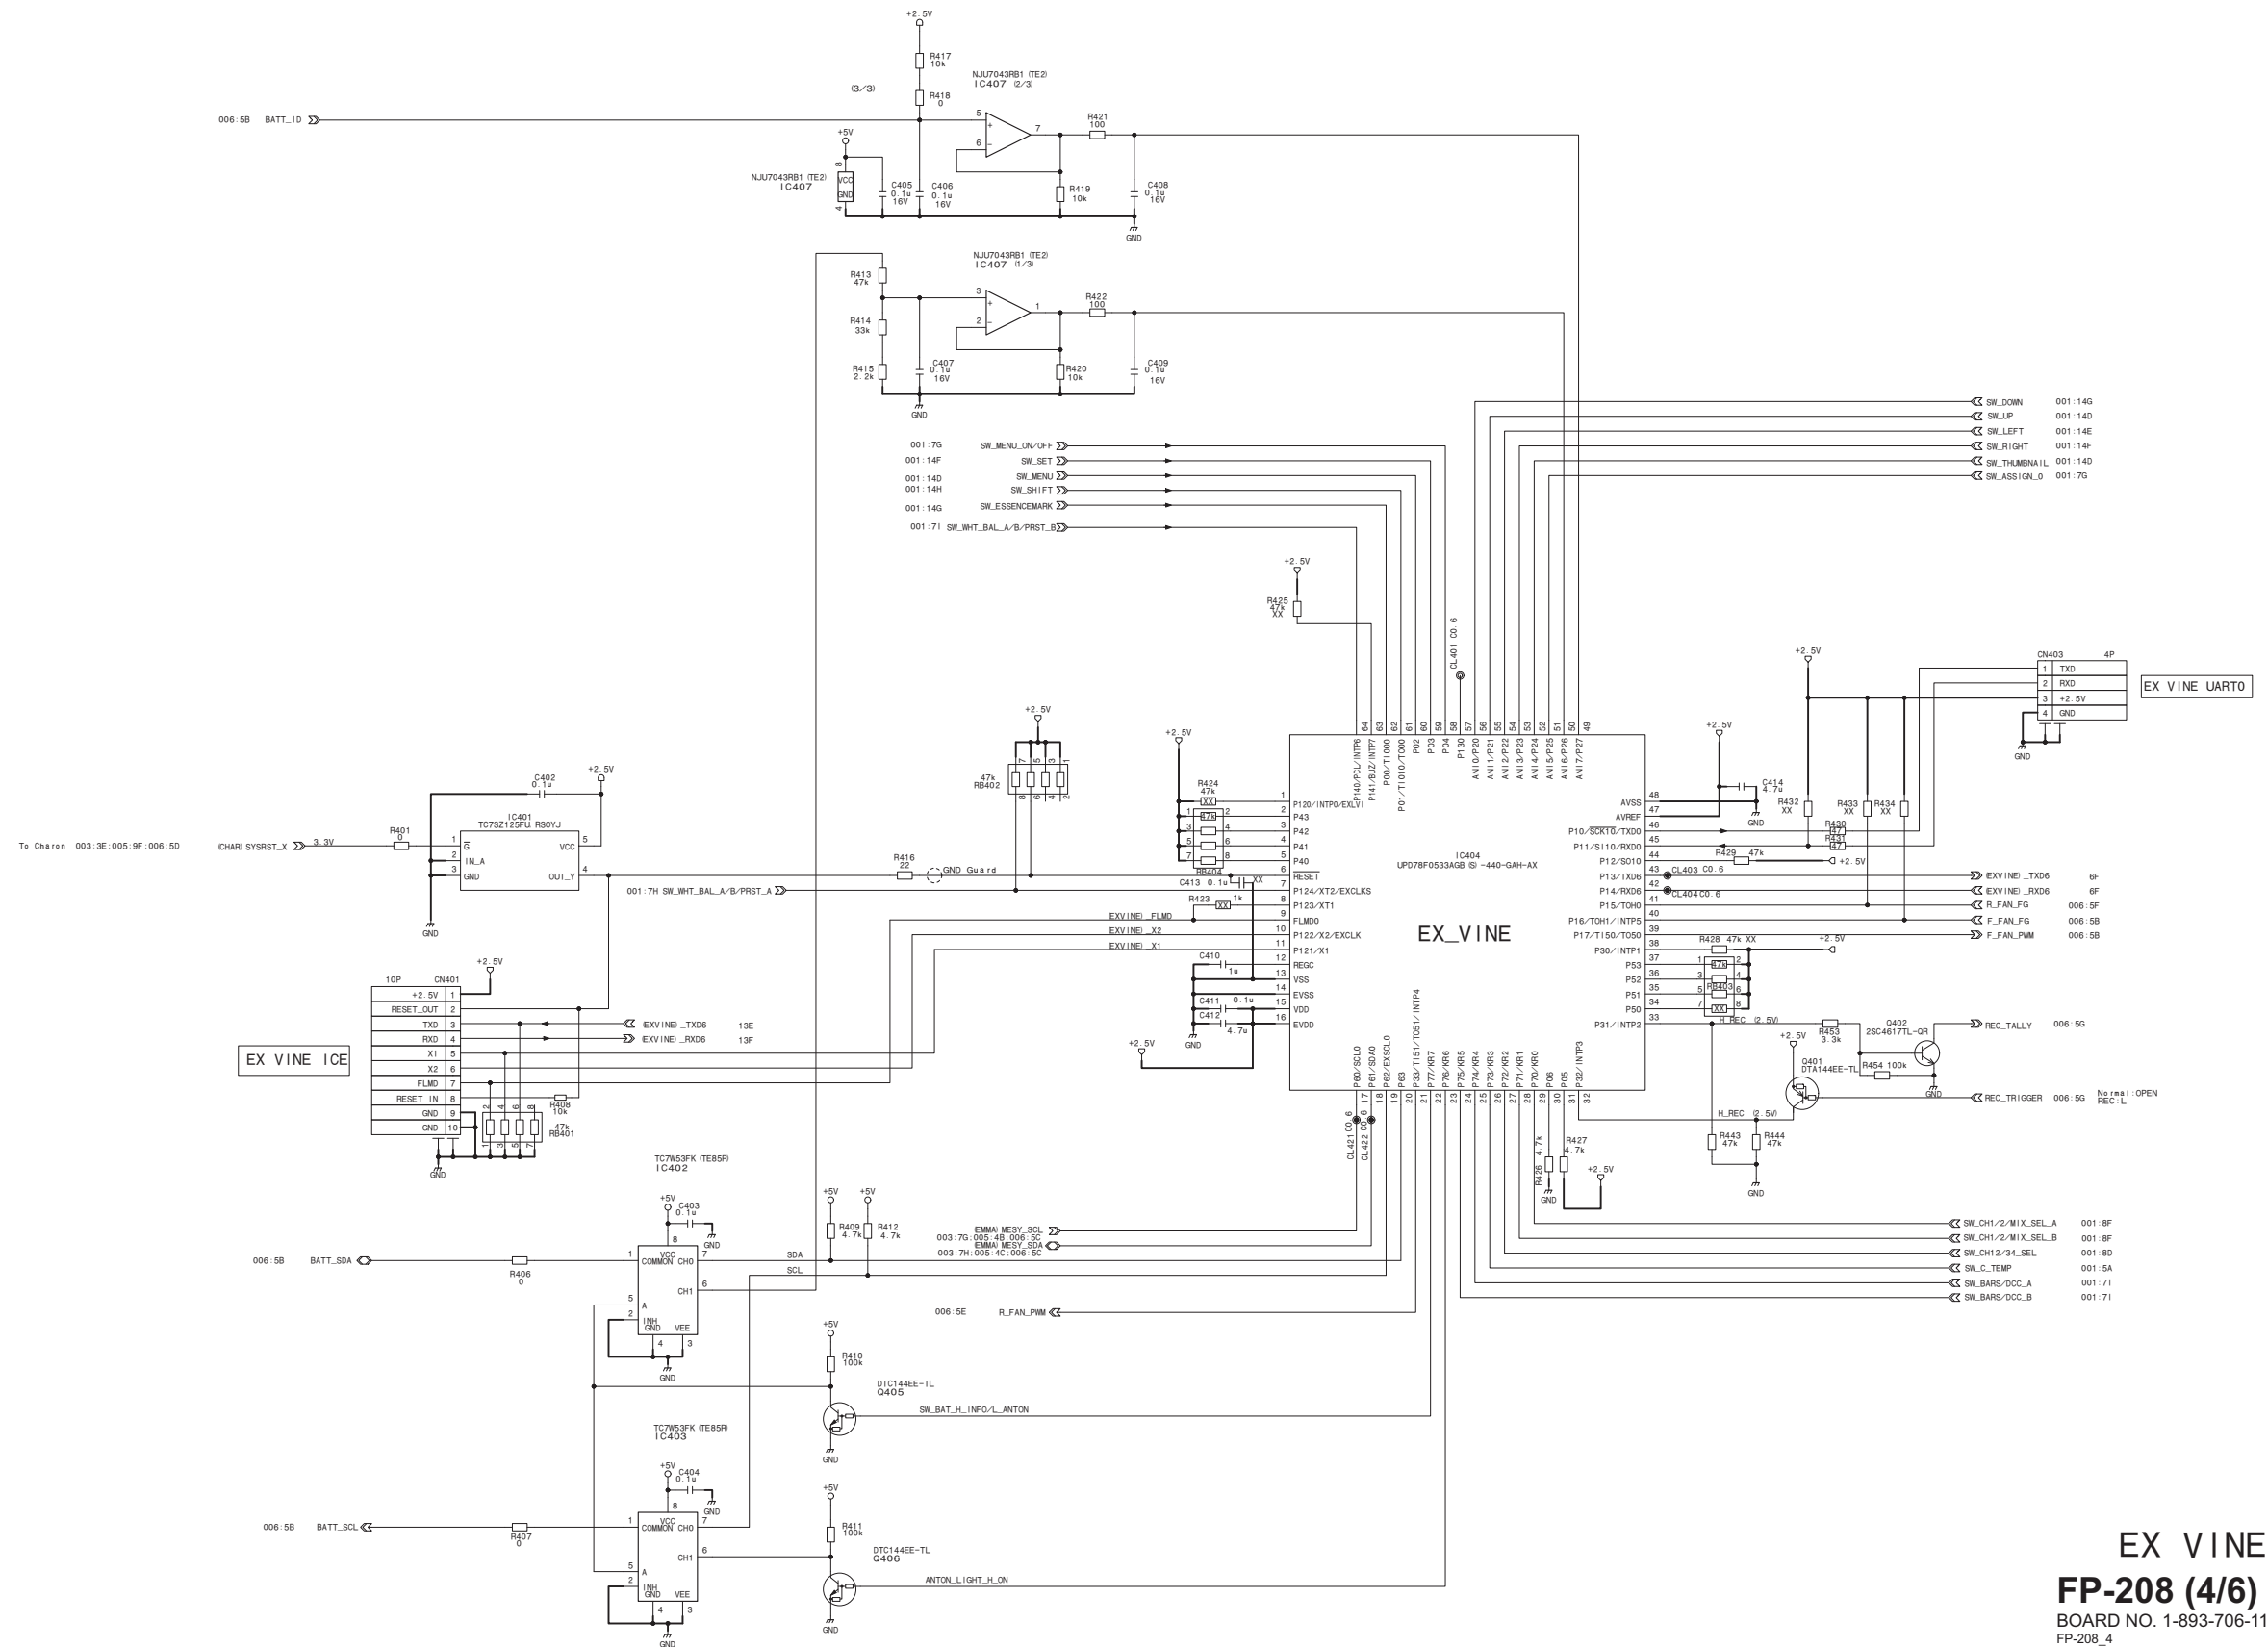FP-208 (4/6)

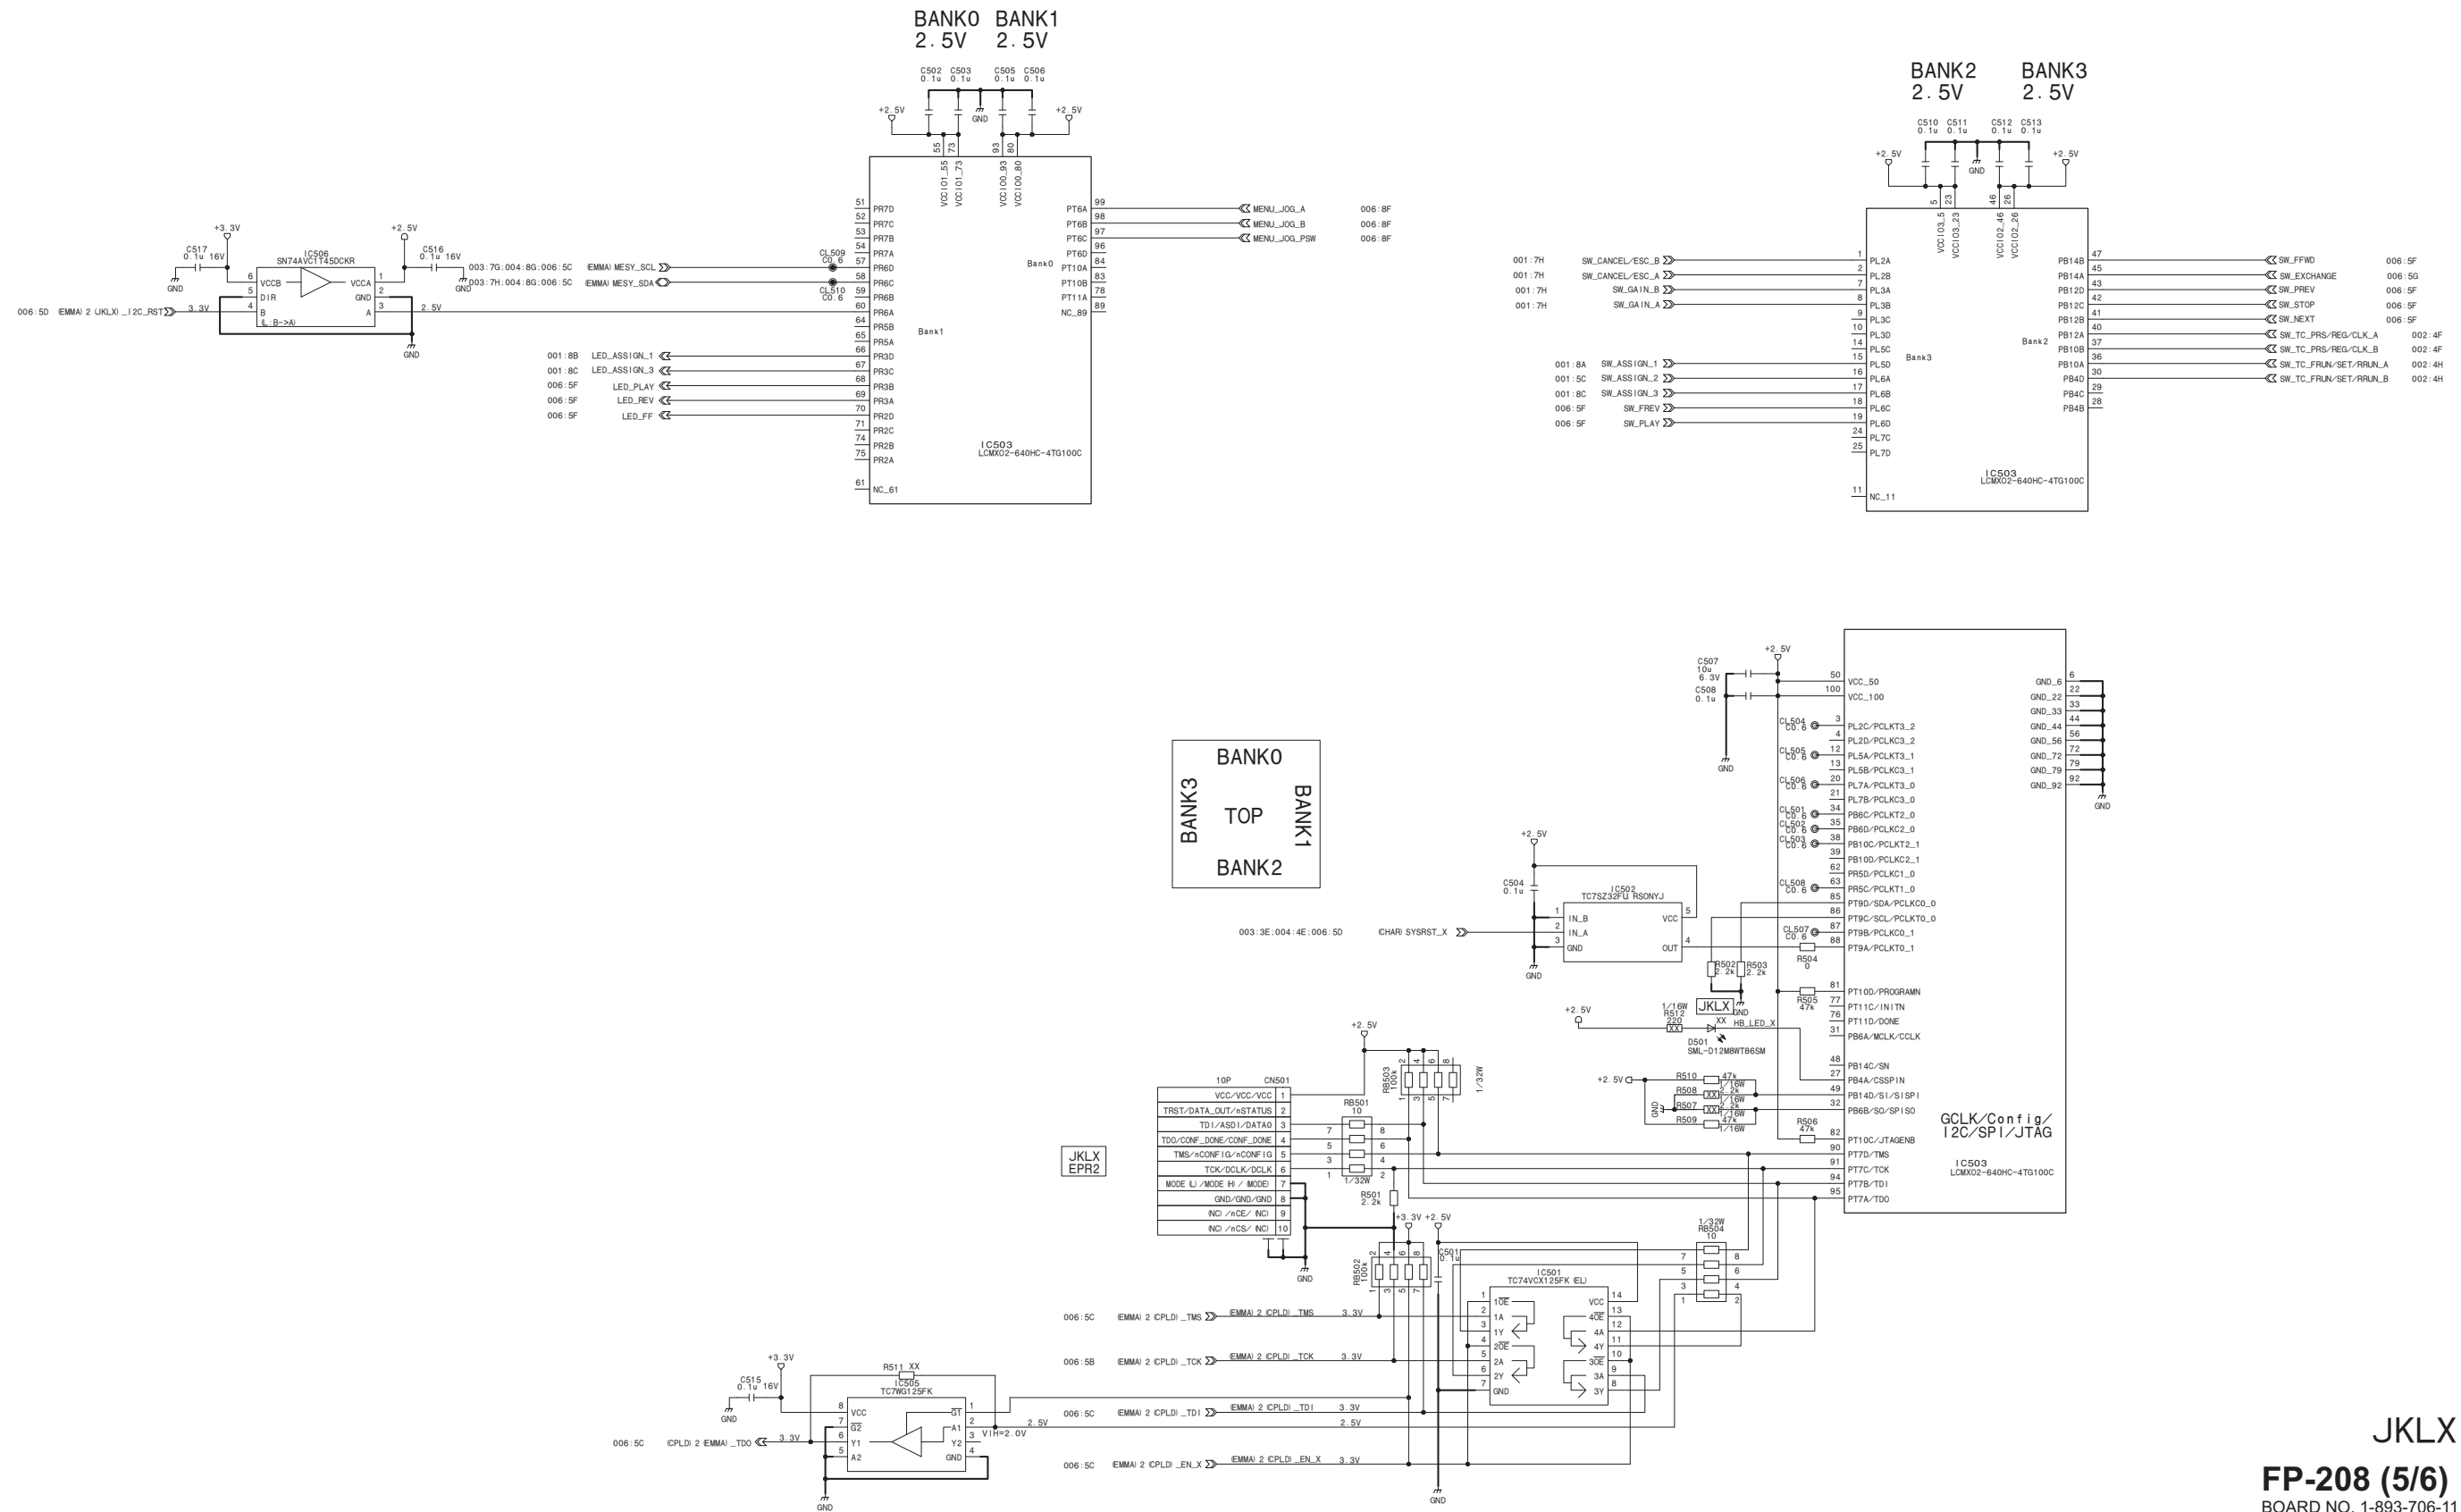FP-208 (5/6)


JKLX

FP-208 (5/6)



BOARD NO. 1-893-706-11
FP-208_5

FP-208 (6/6)




To MB-1210
FP1

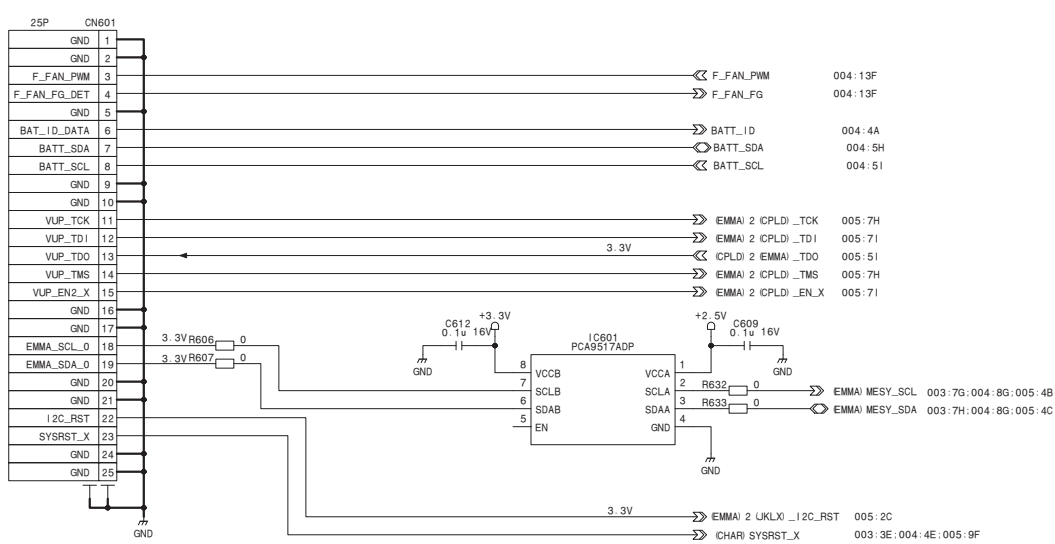

To MB-1210
FP3

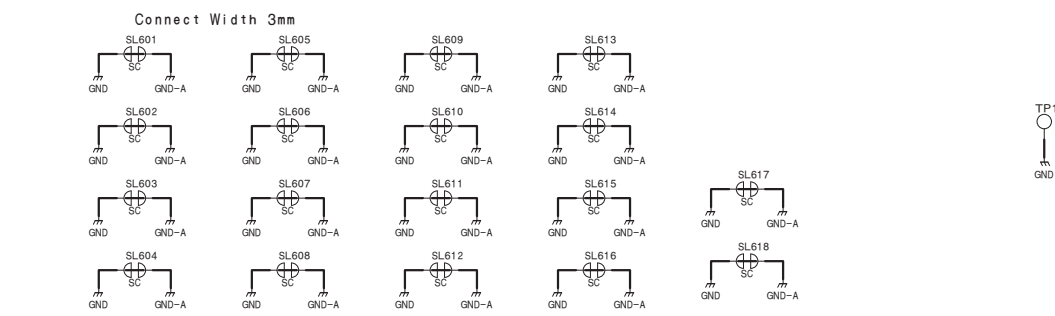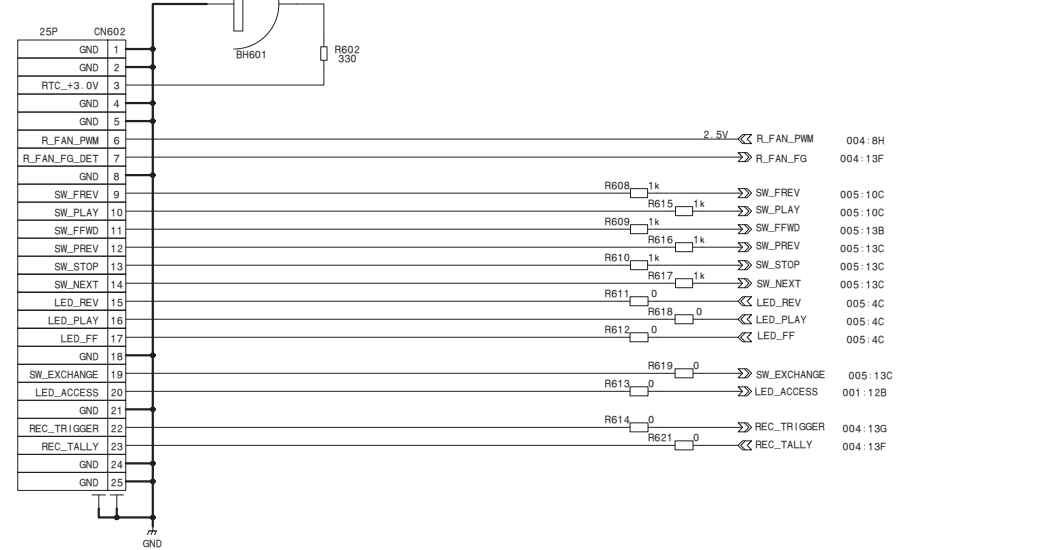

To MB-1210
FP2

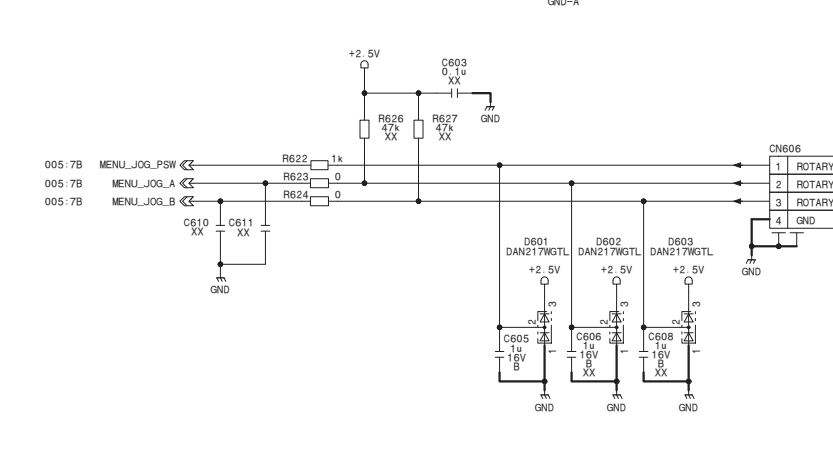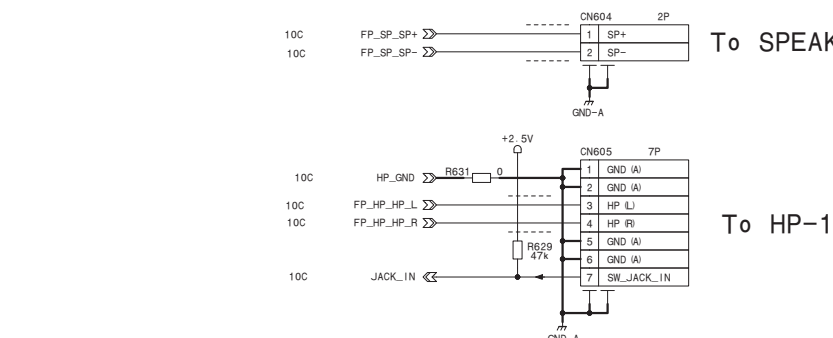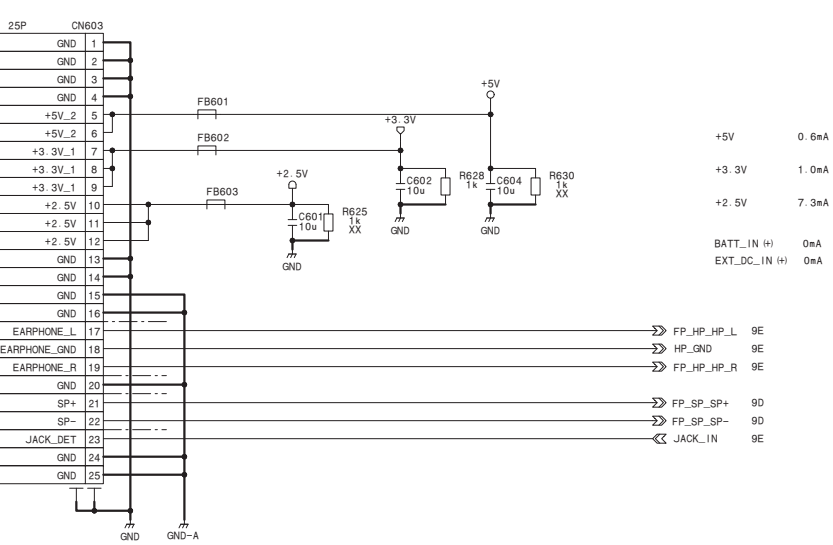


To SPEAKER

To HP-171

To ENC-162


CN

FP-208 (6/6)
BOARD NO. 1-893-706-11
FP-208_6

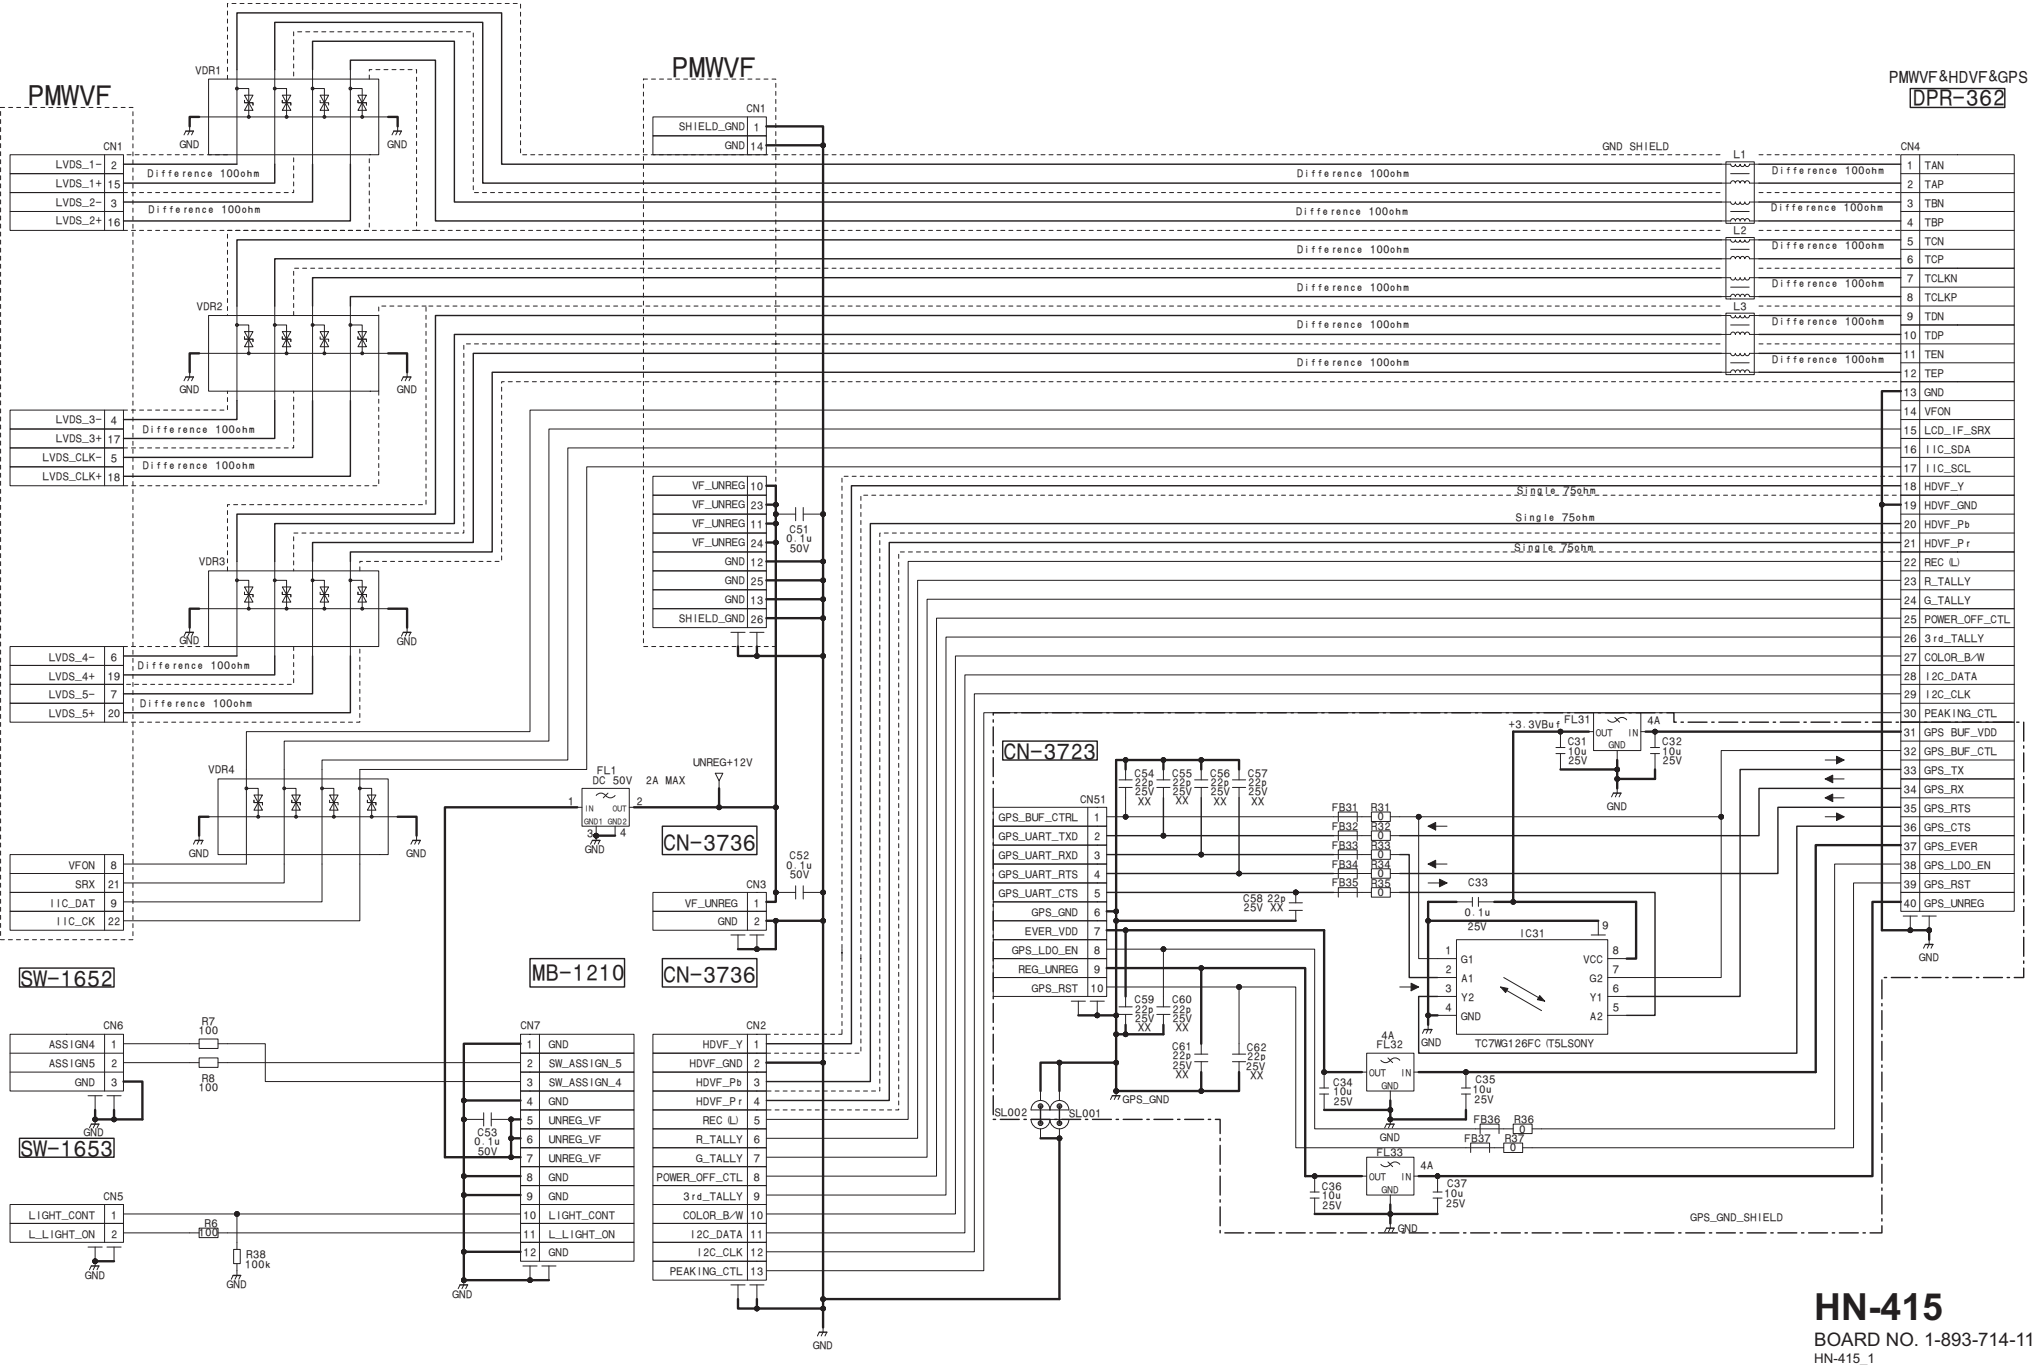

HN-415
BOARD NO. 1-893-714-11
HN-415_1


HP-171

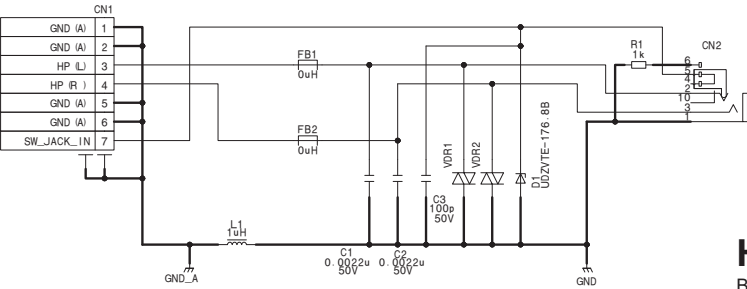


HP-171
BOARD NO. 1-893-721-11
HP-171_1

HPR-53
HPR-53 (1/15)


To Rosetta CN

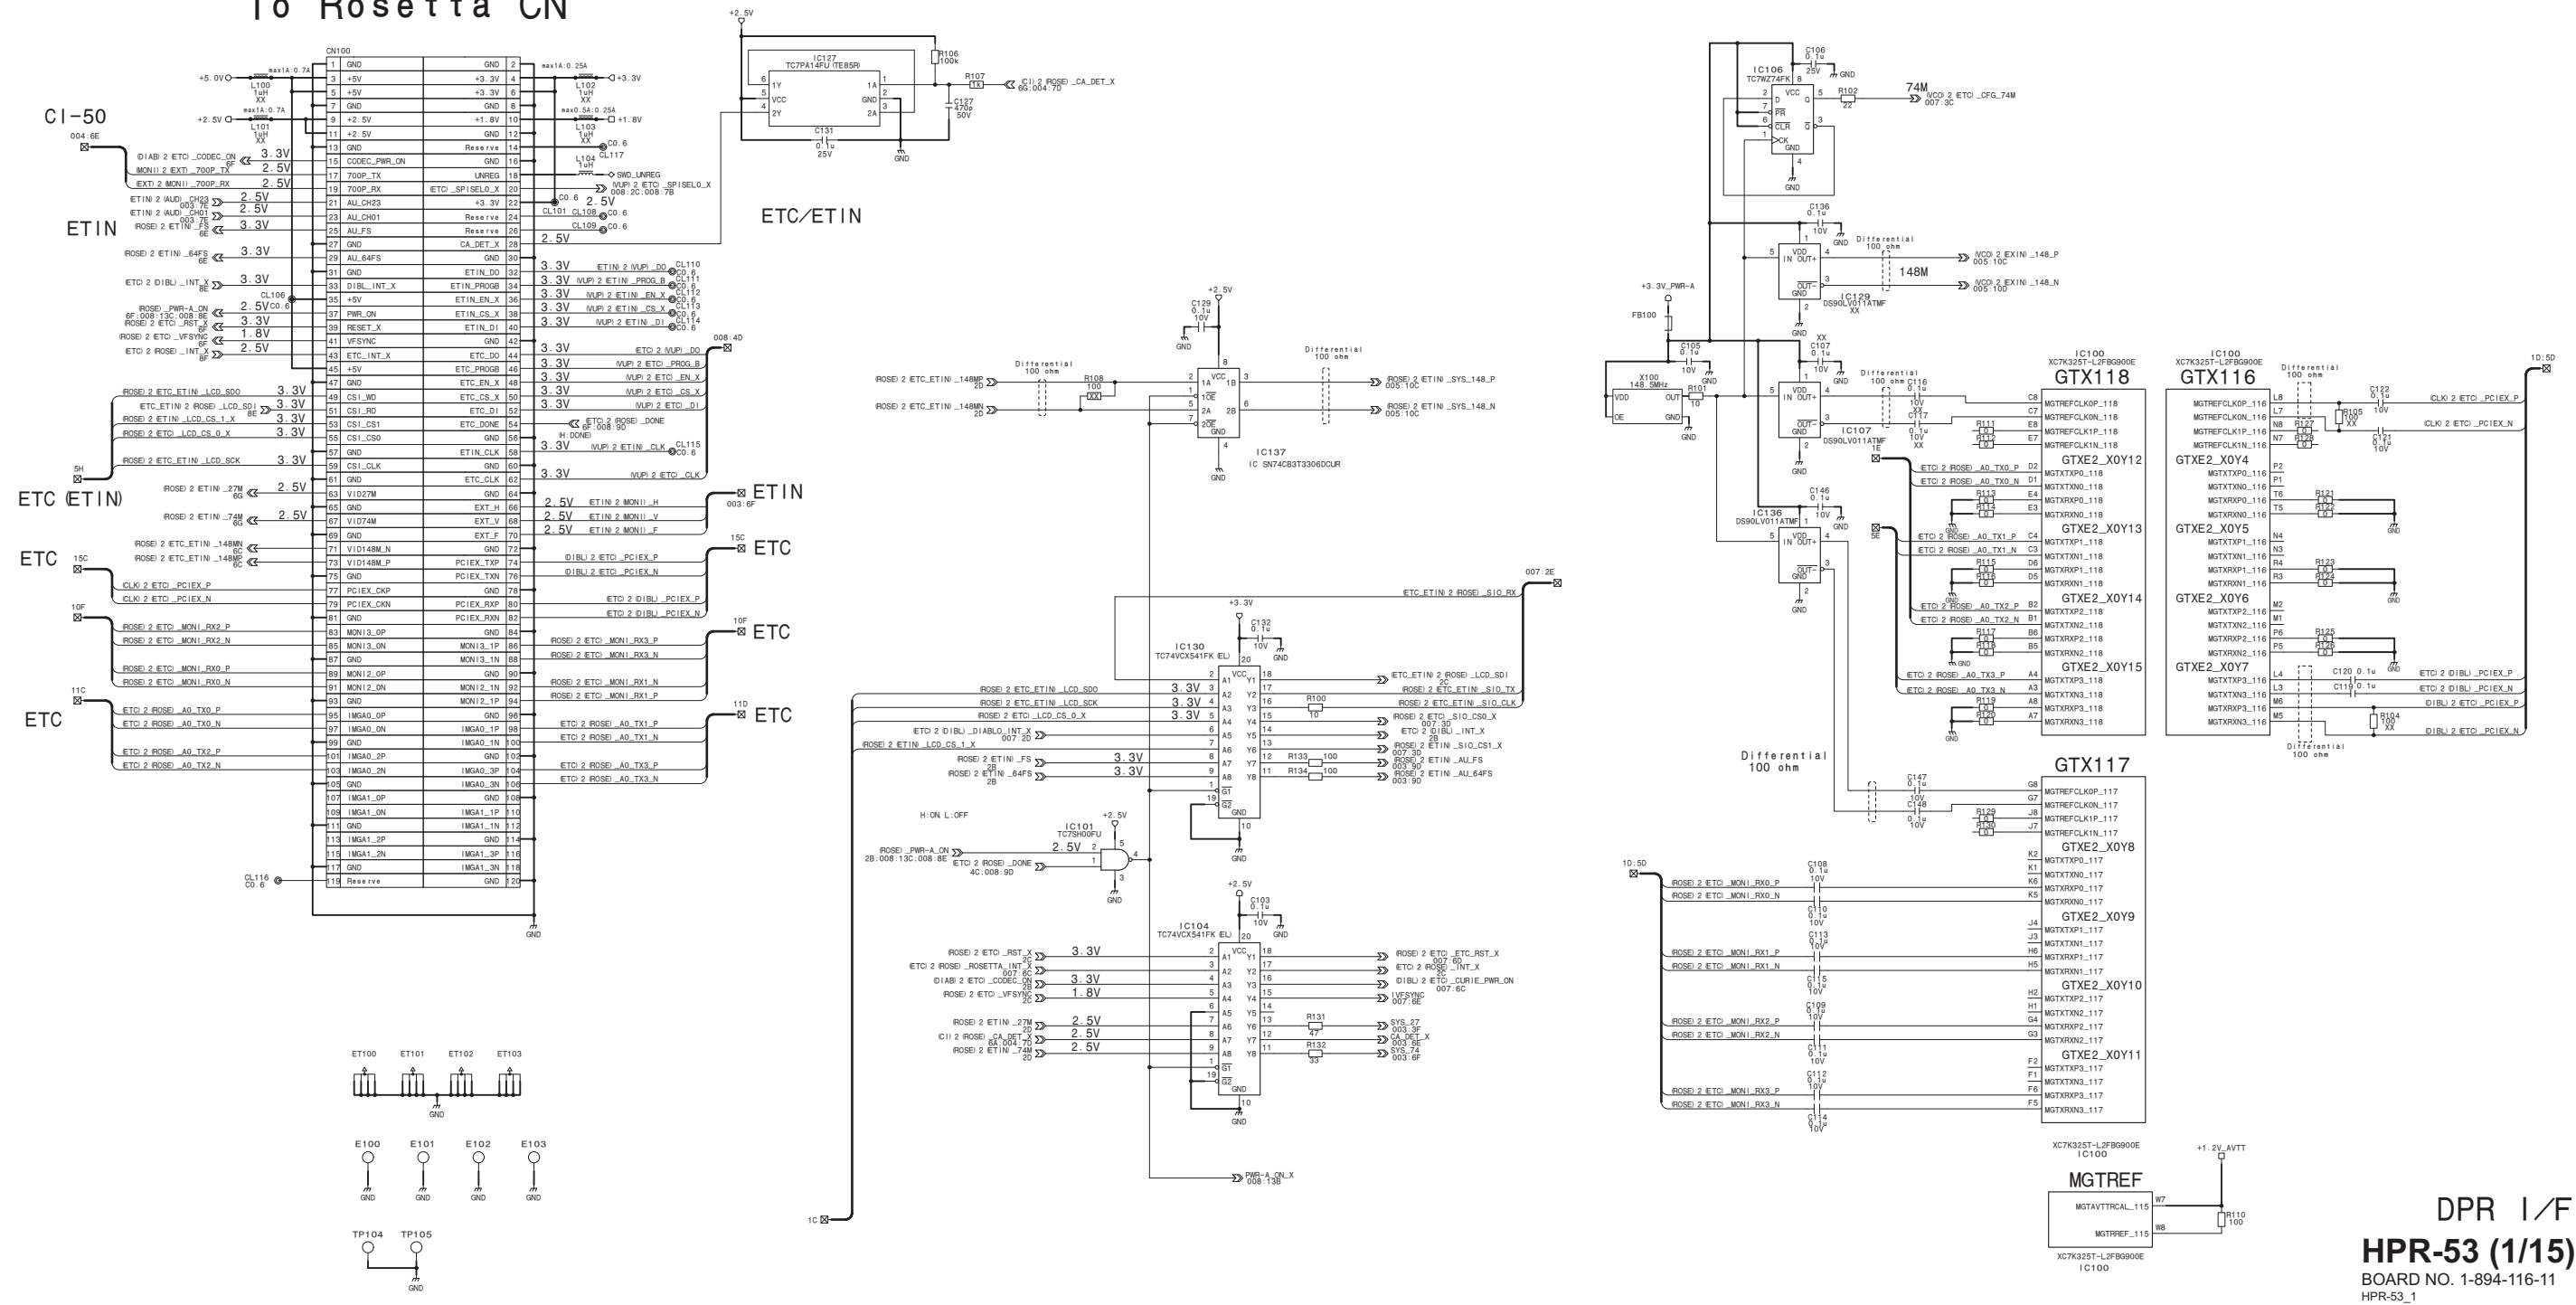


HPR-53 (2/15)

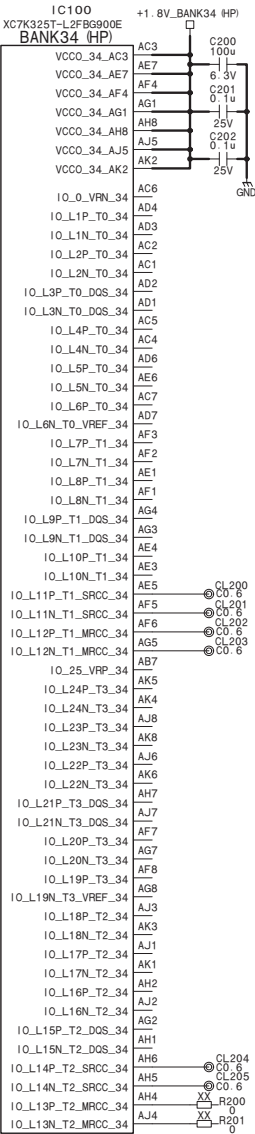

ETC 1/F
HPR-53 (2/15)
 BOARD NO. 1-894-116-11
 HPR-53_2





To CI-50

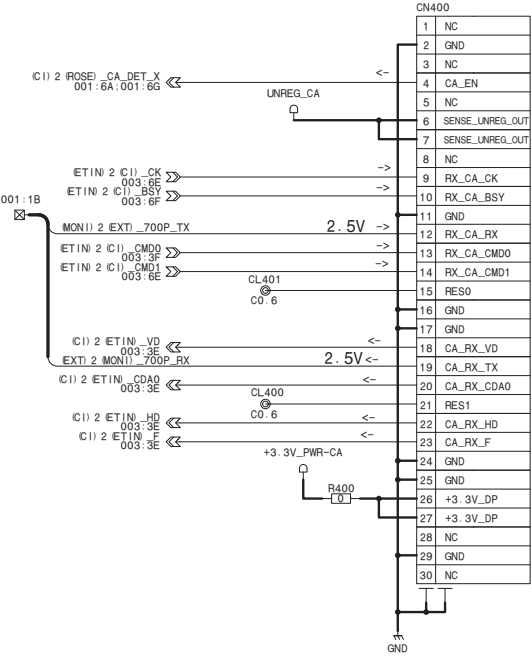


ETIN MISC
 (Config/Power)

HPR-53 (4/15)
 BOARD NO. 1-894-116-11
 HPR-53_4

HPR-53 (5/15)

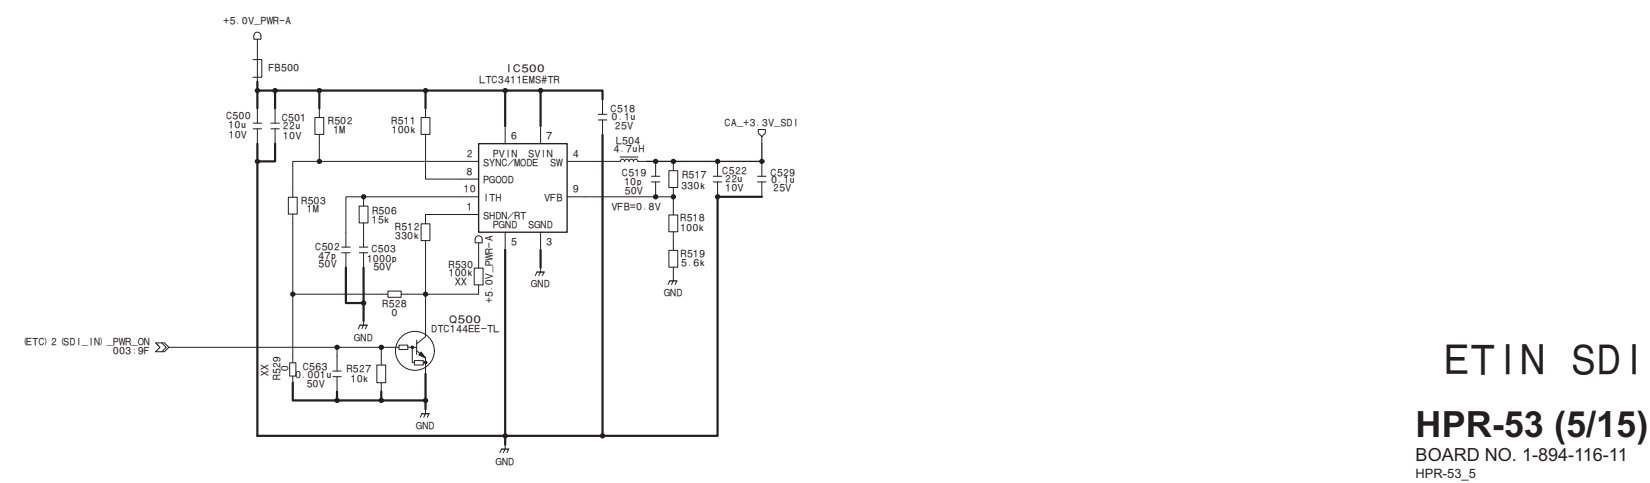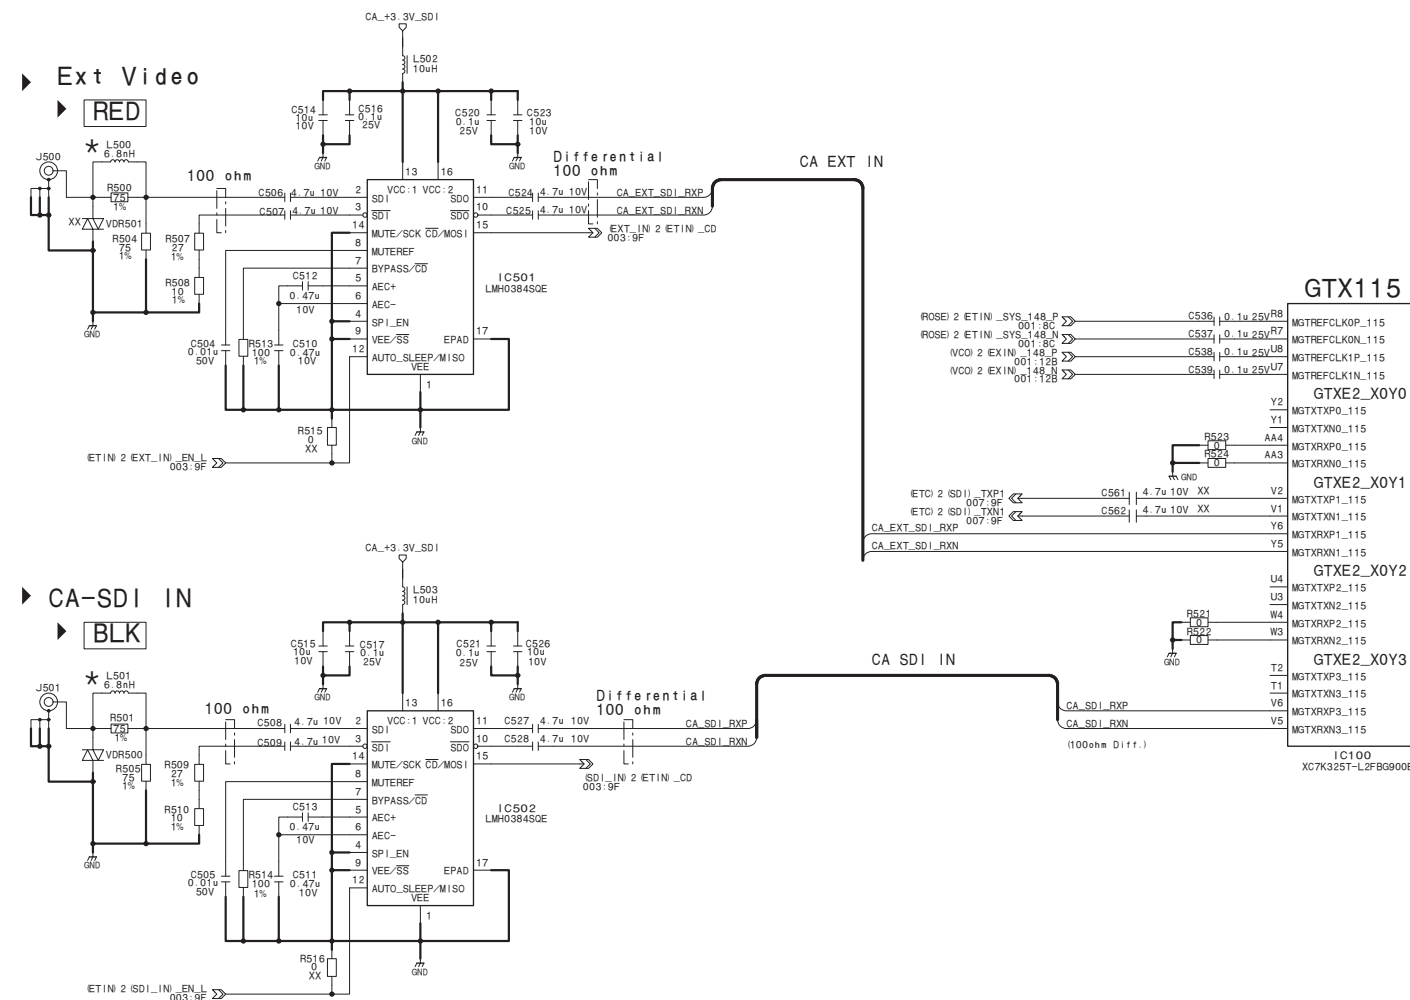

HPR-53 (6/15)


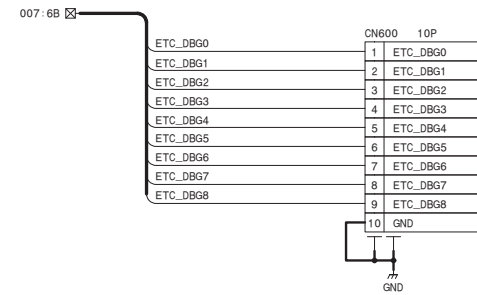


Debug CN

HPR-53 (6/15)

BOARD NO. 1-894-116-11
HPR-53_6


HPR-53 (7/15)

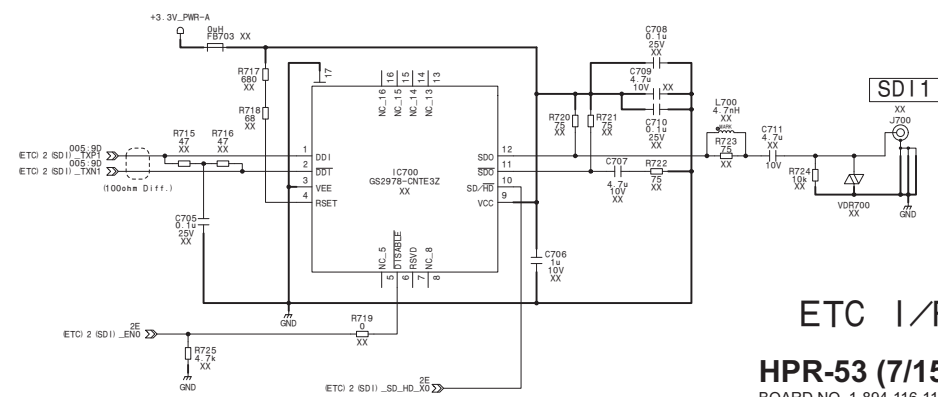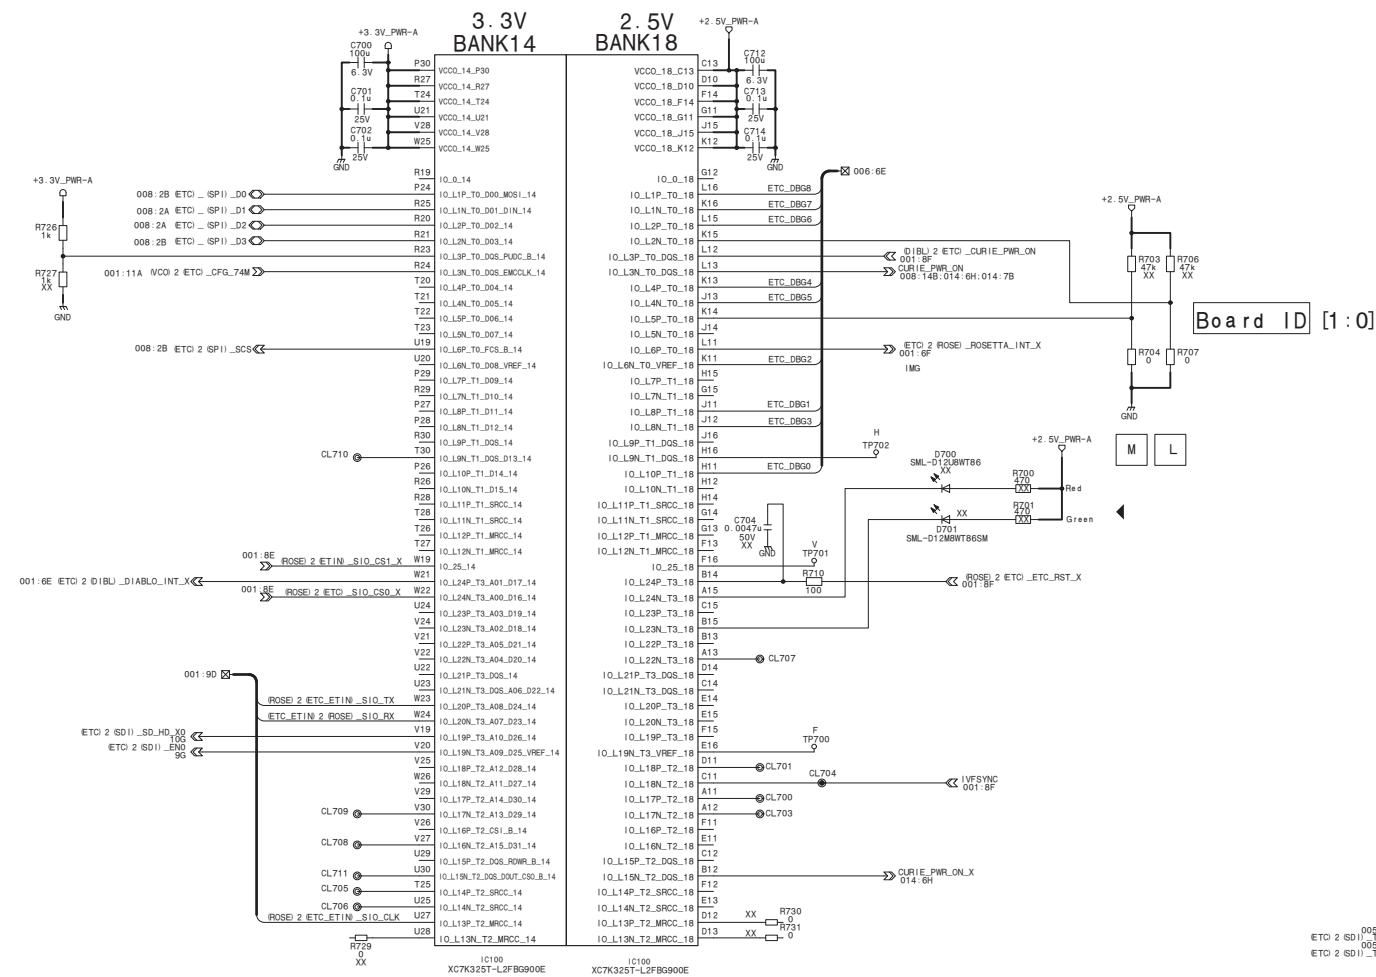


ETC I/F

HPR-53 (7/15)


BOARD NO. 1-894-116-11
HPR-53_7

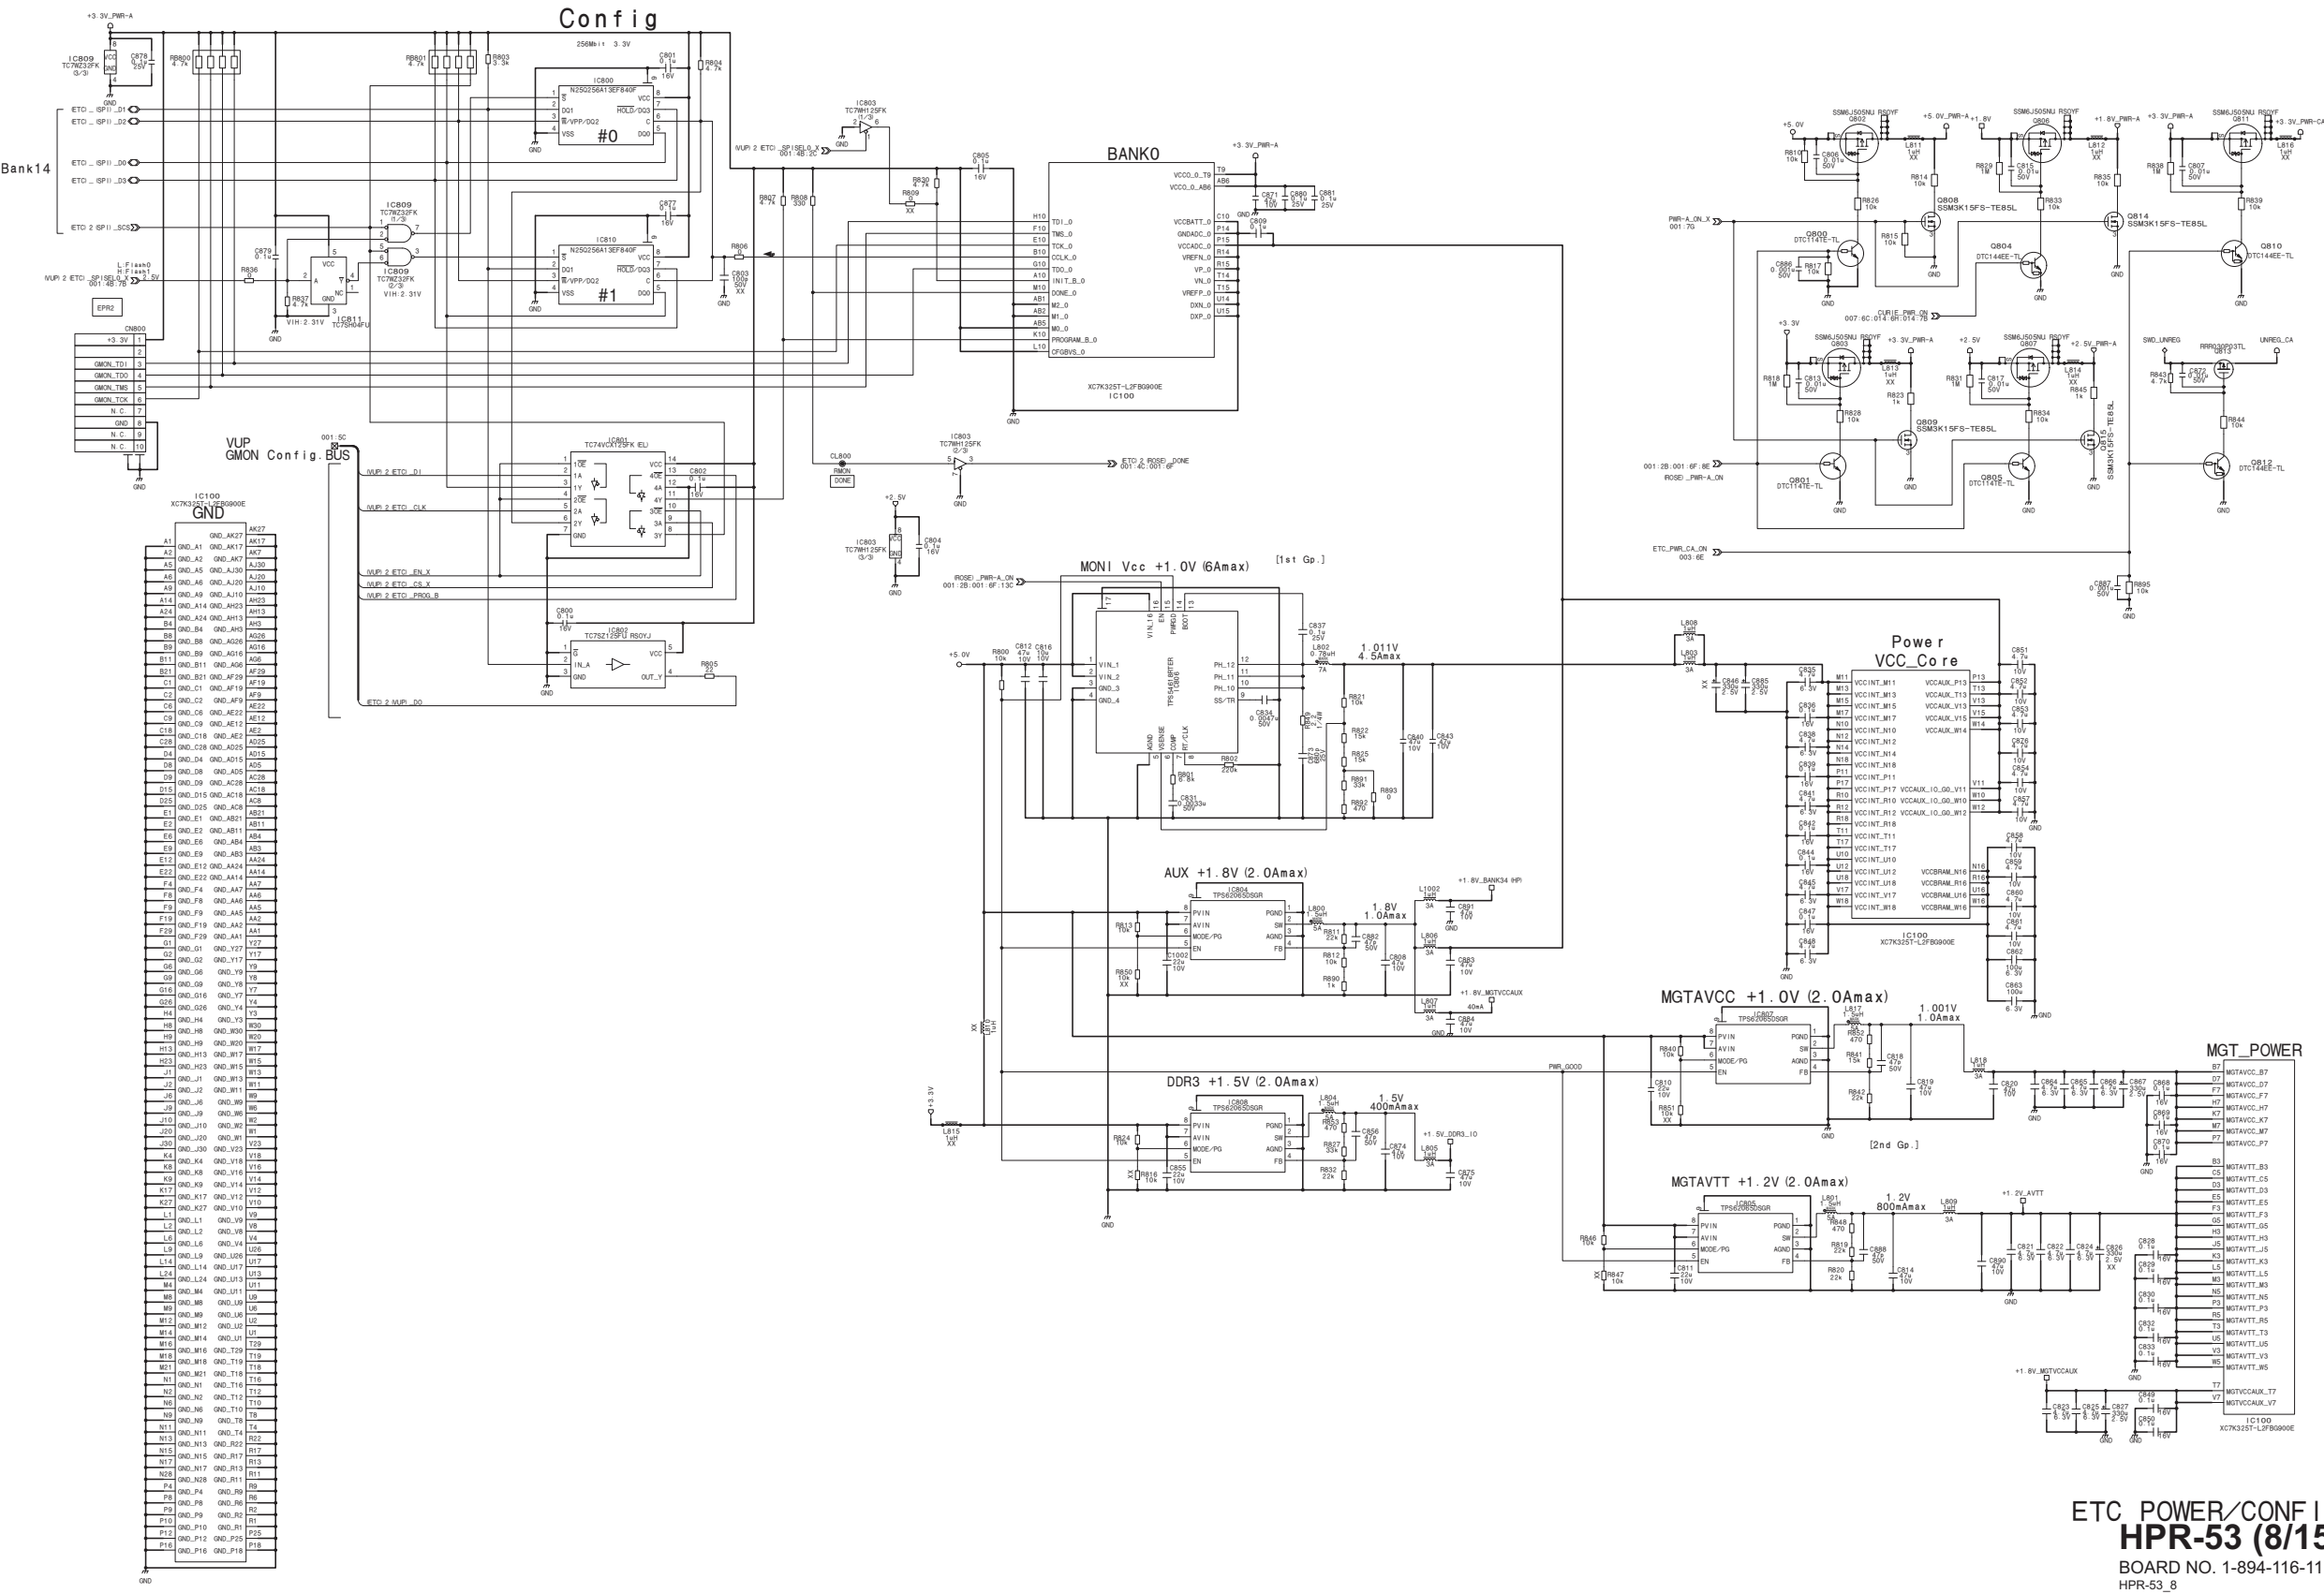

ETC POWER/CONFIG
HPR-53 (8/15)
 BOARD NO. 1-894-116-11
 HPR-53_8

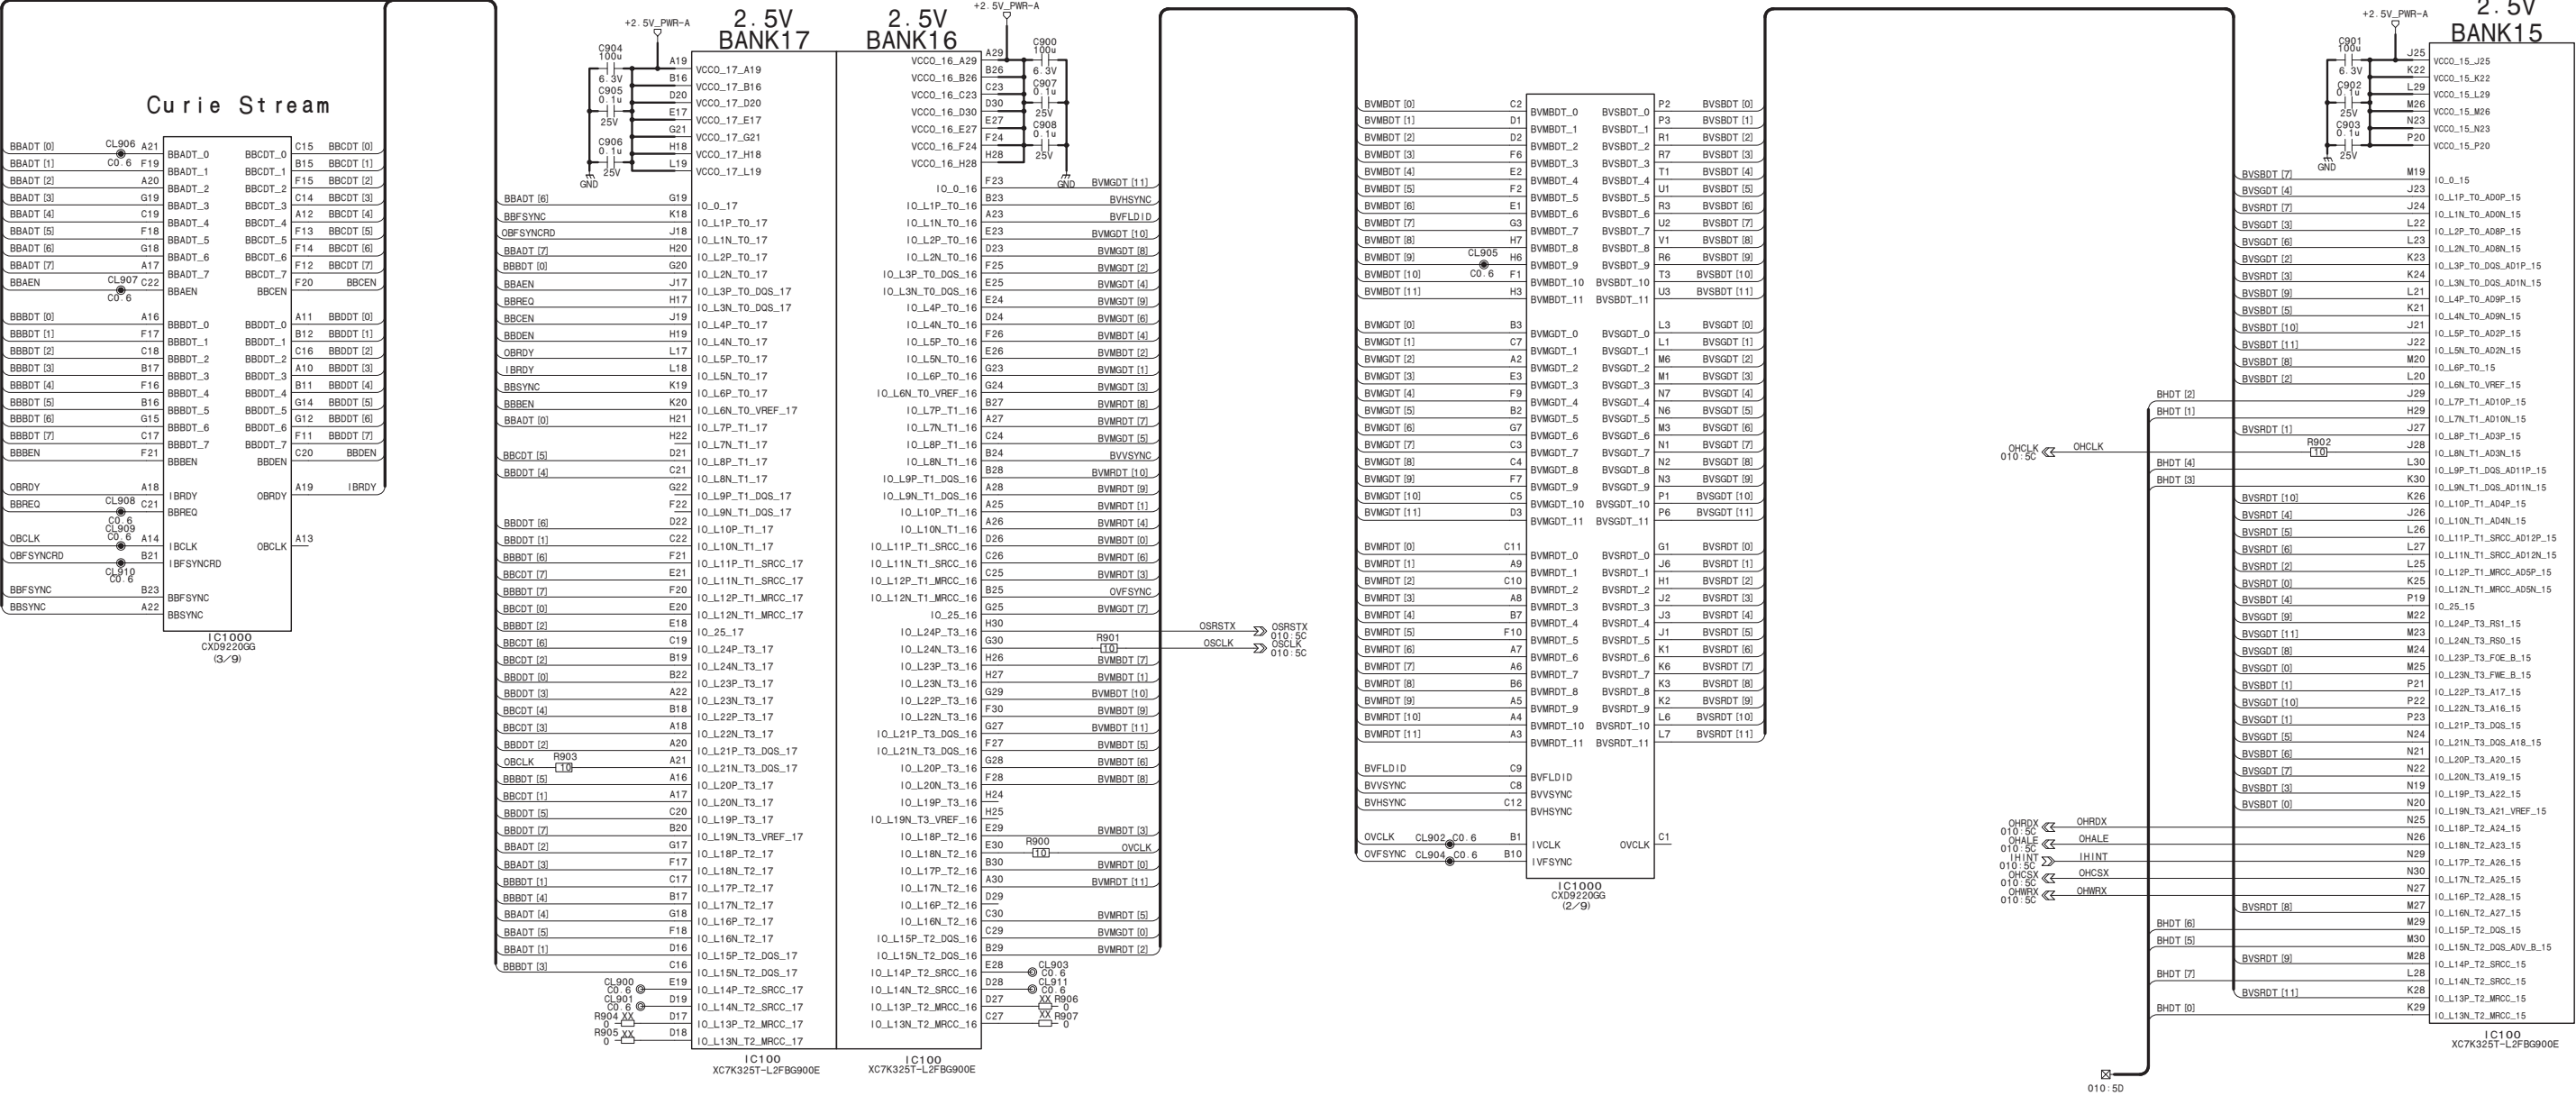



ETC Curie BS/Video
 (CURIE STREAM/VIDEO)

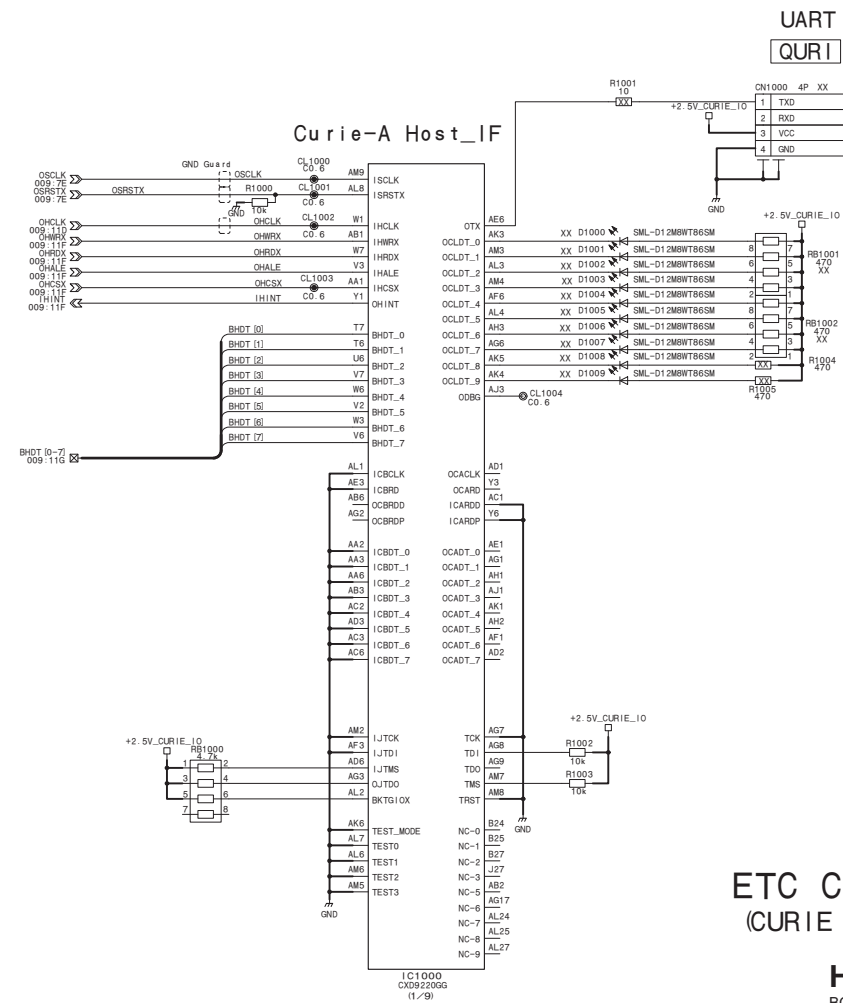HPR-53 (10/15)

ETC Curie Host
(CURIE HOST I/F)

HPR-53 (10/15)
BOARD NO. 1-894-116-11
HPR-53_10

HPR-53 (11/15)

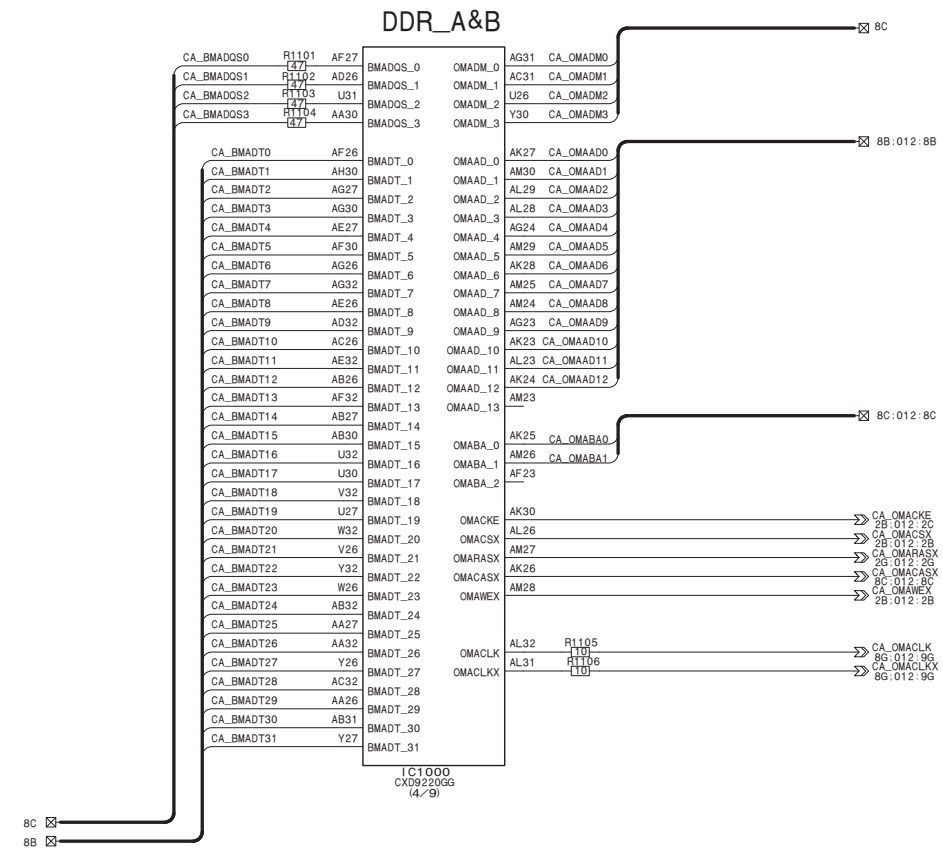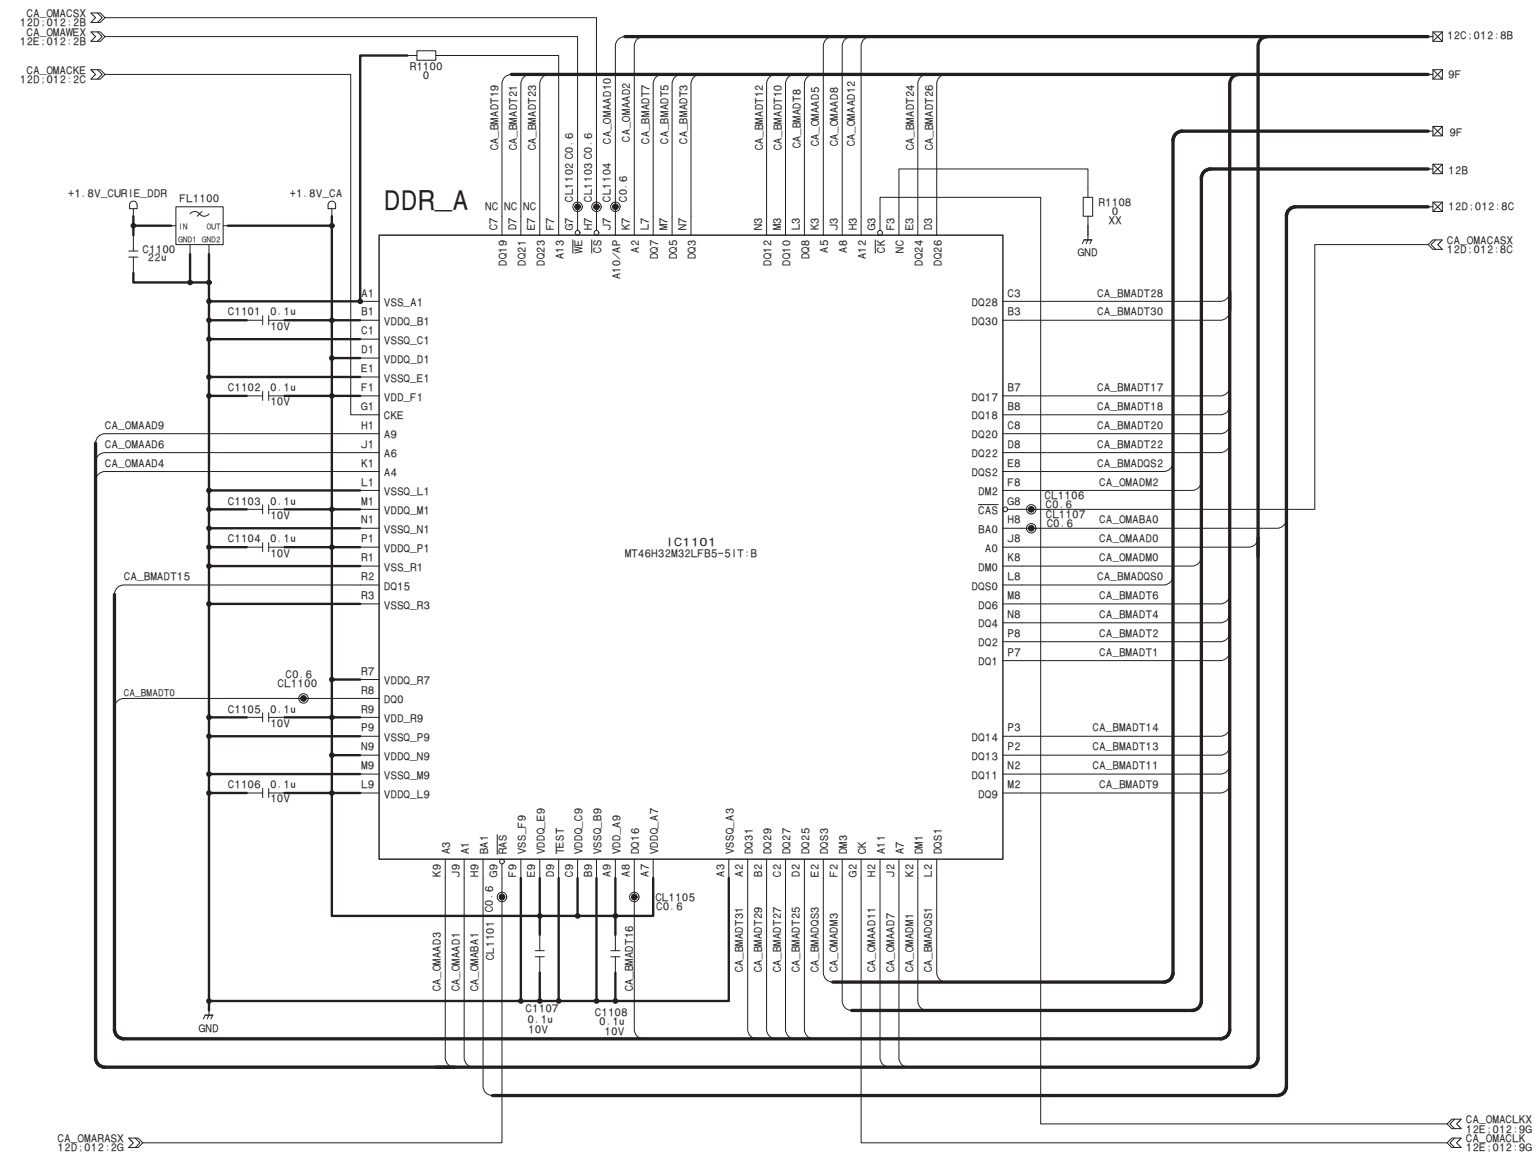


Curie DDR-A

HPR-53 (11/15)

BOARD NO. 1-894-116-11
HPR-53_11

HPR-53 (12/15)


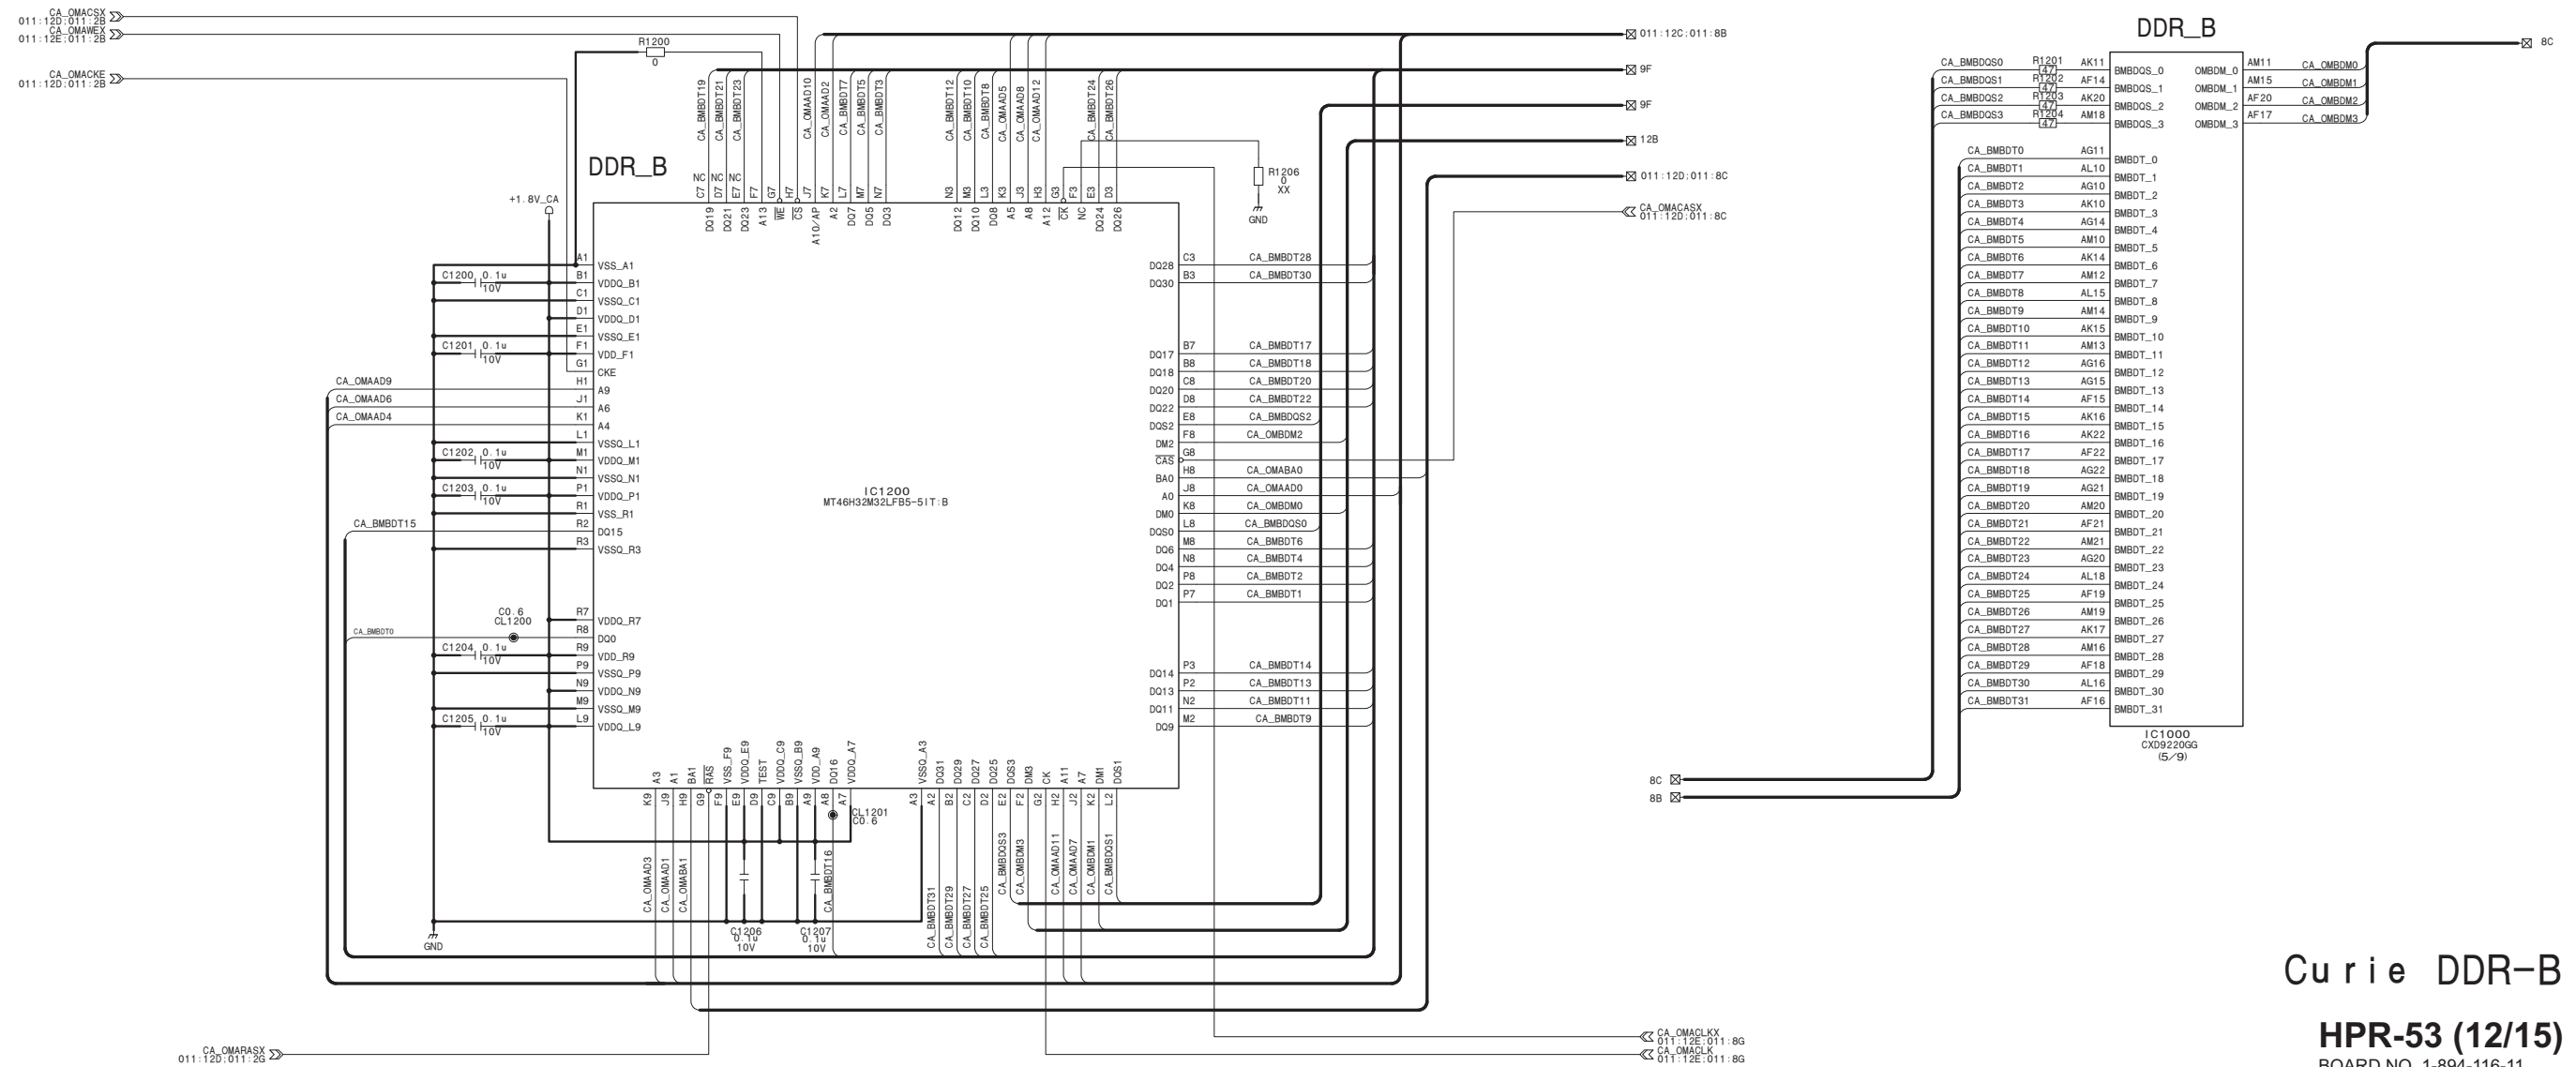


Curie DDR-B

HPR-53 (12/15)

BOARD NO. 1-894-116-11
HPR-53_12



HPR-53 (13/15)

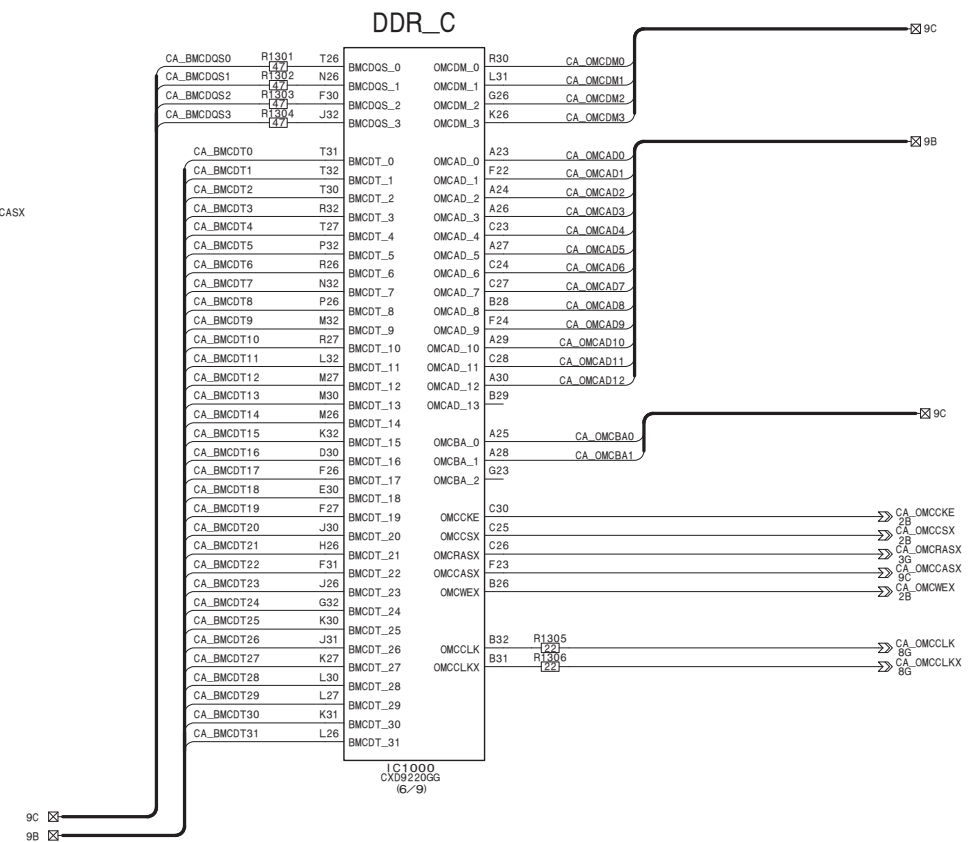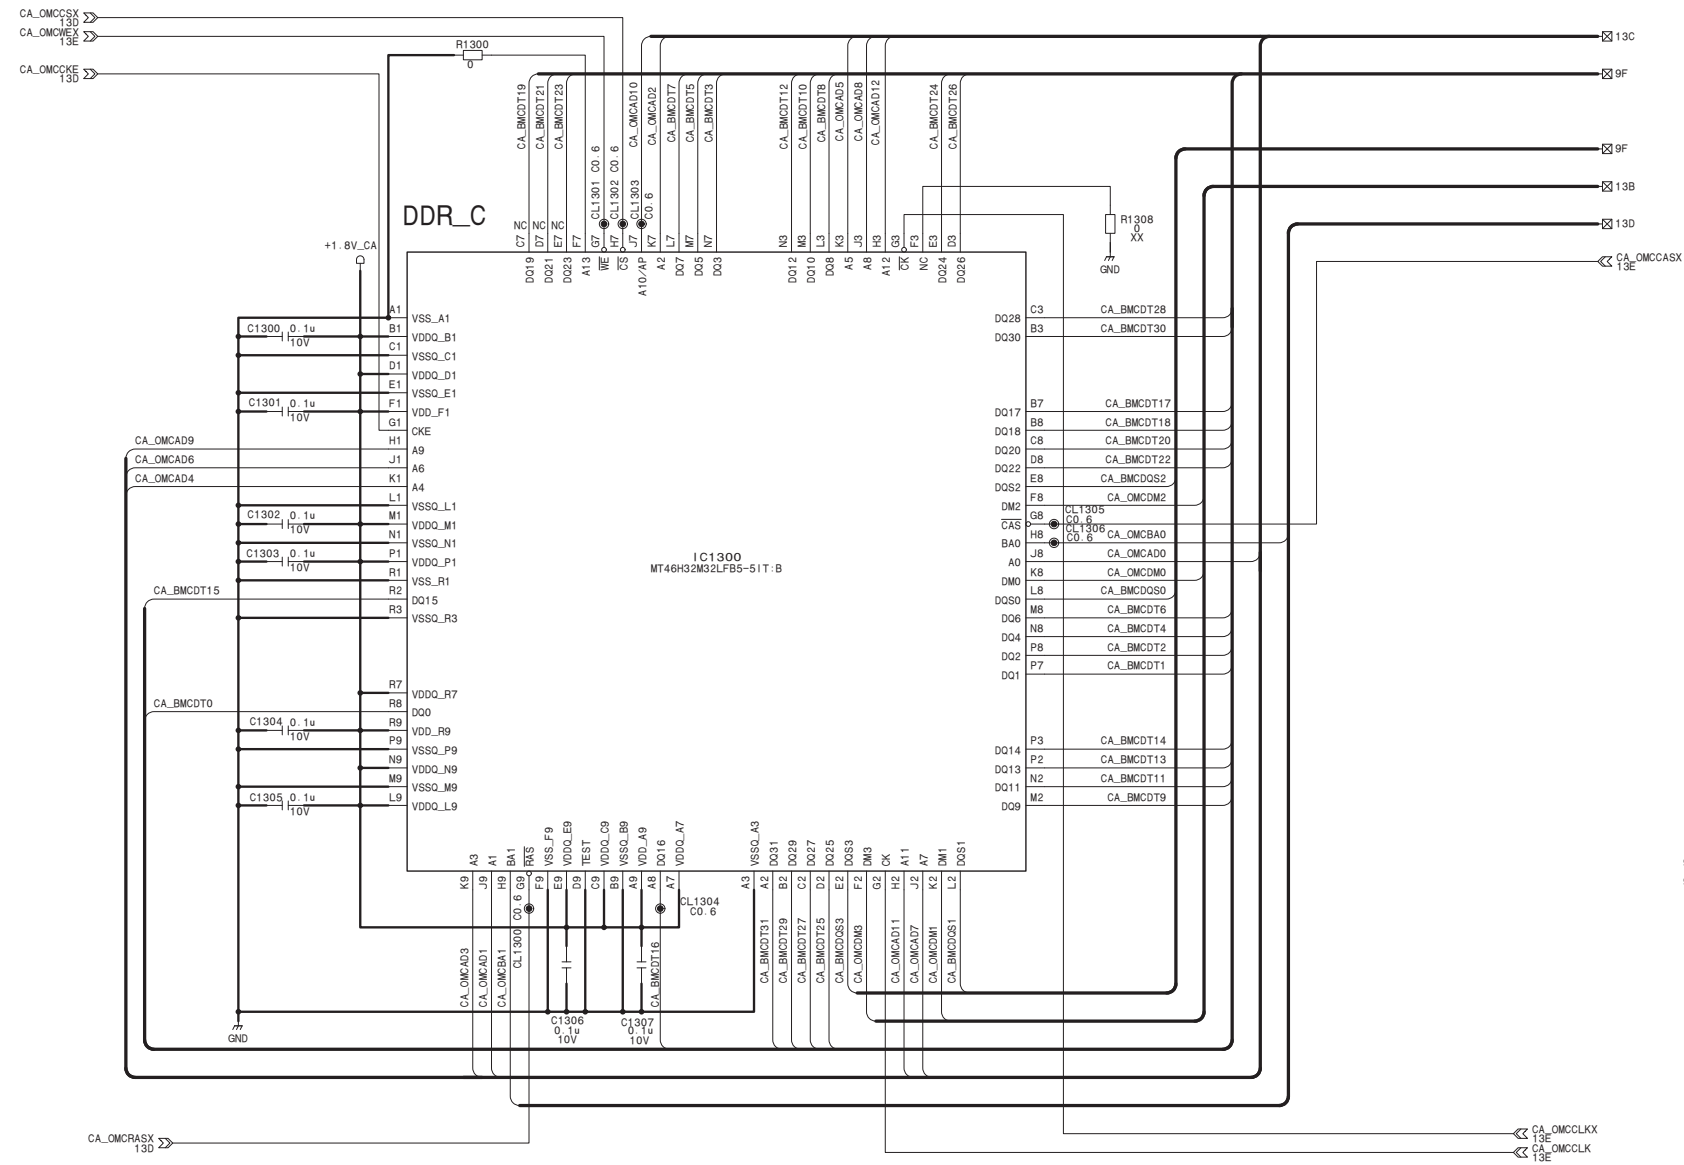


Curie DDR-C

HPR-53 (13/15)

BOARD NO. 1-894-116-11
HPR-53_13

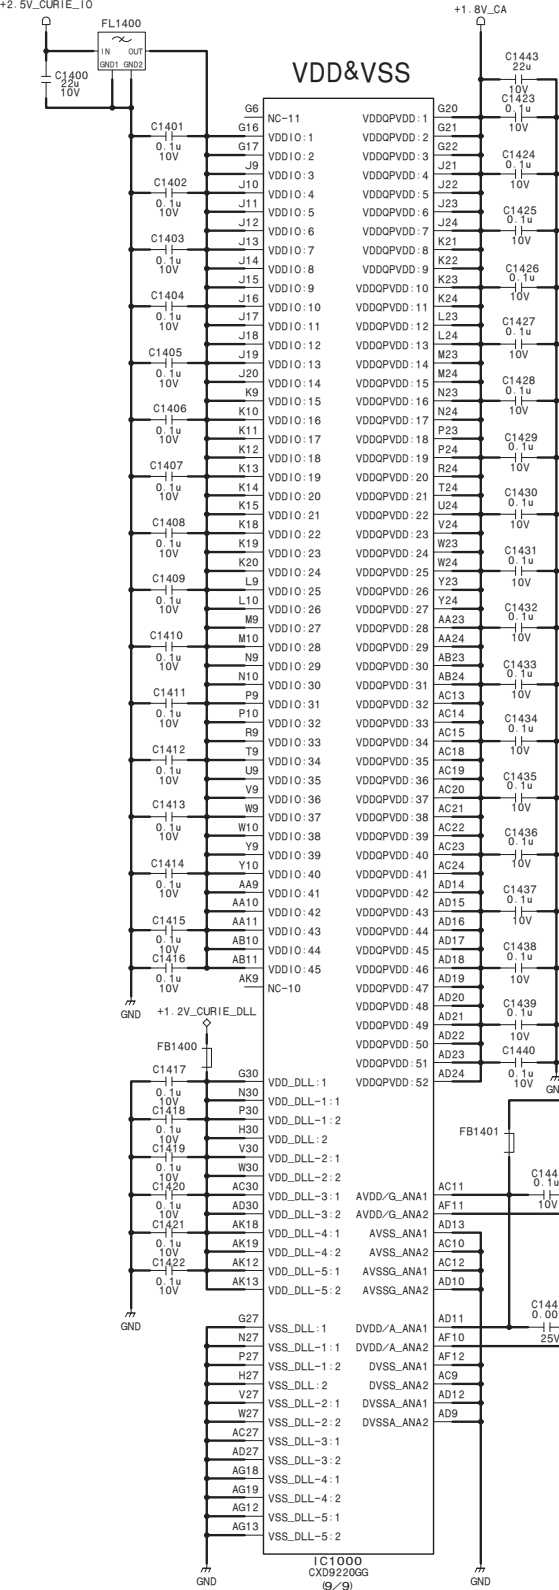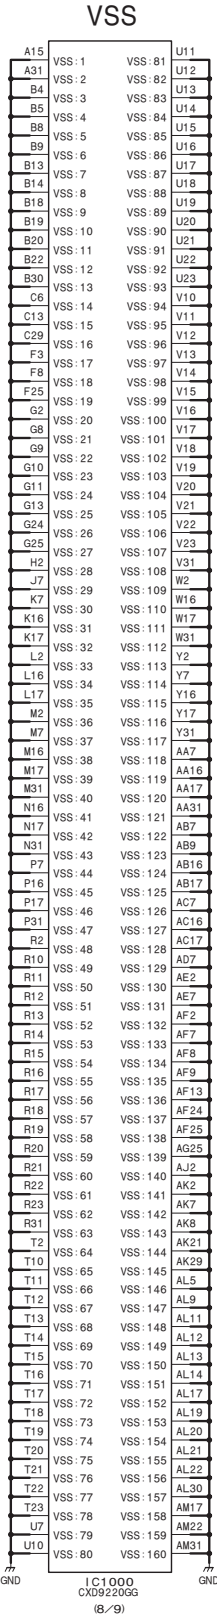


HPR-53 (15/15)

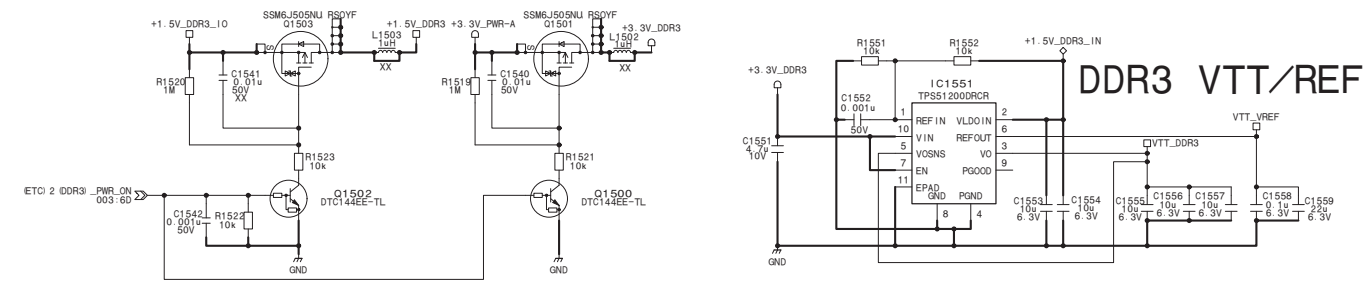

ETC
DDR3 I/F 1.5V

DDR3-1

DDR3-2

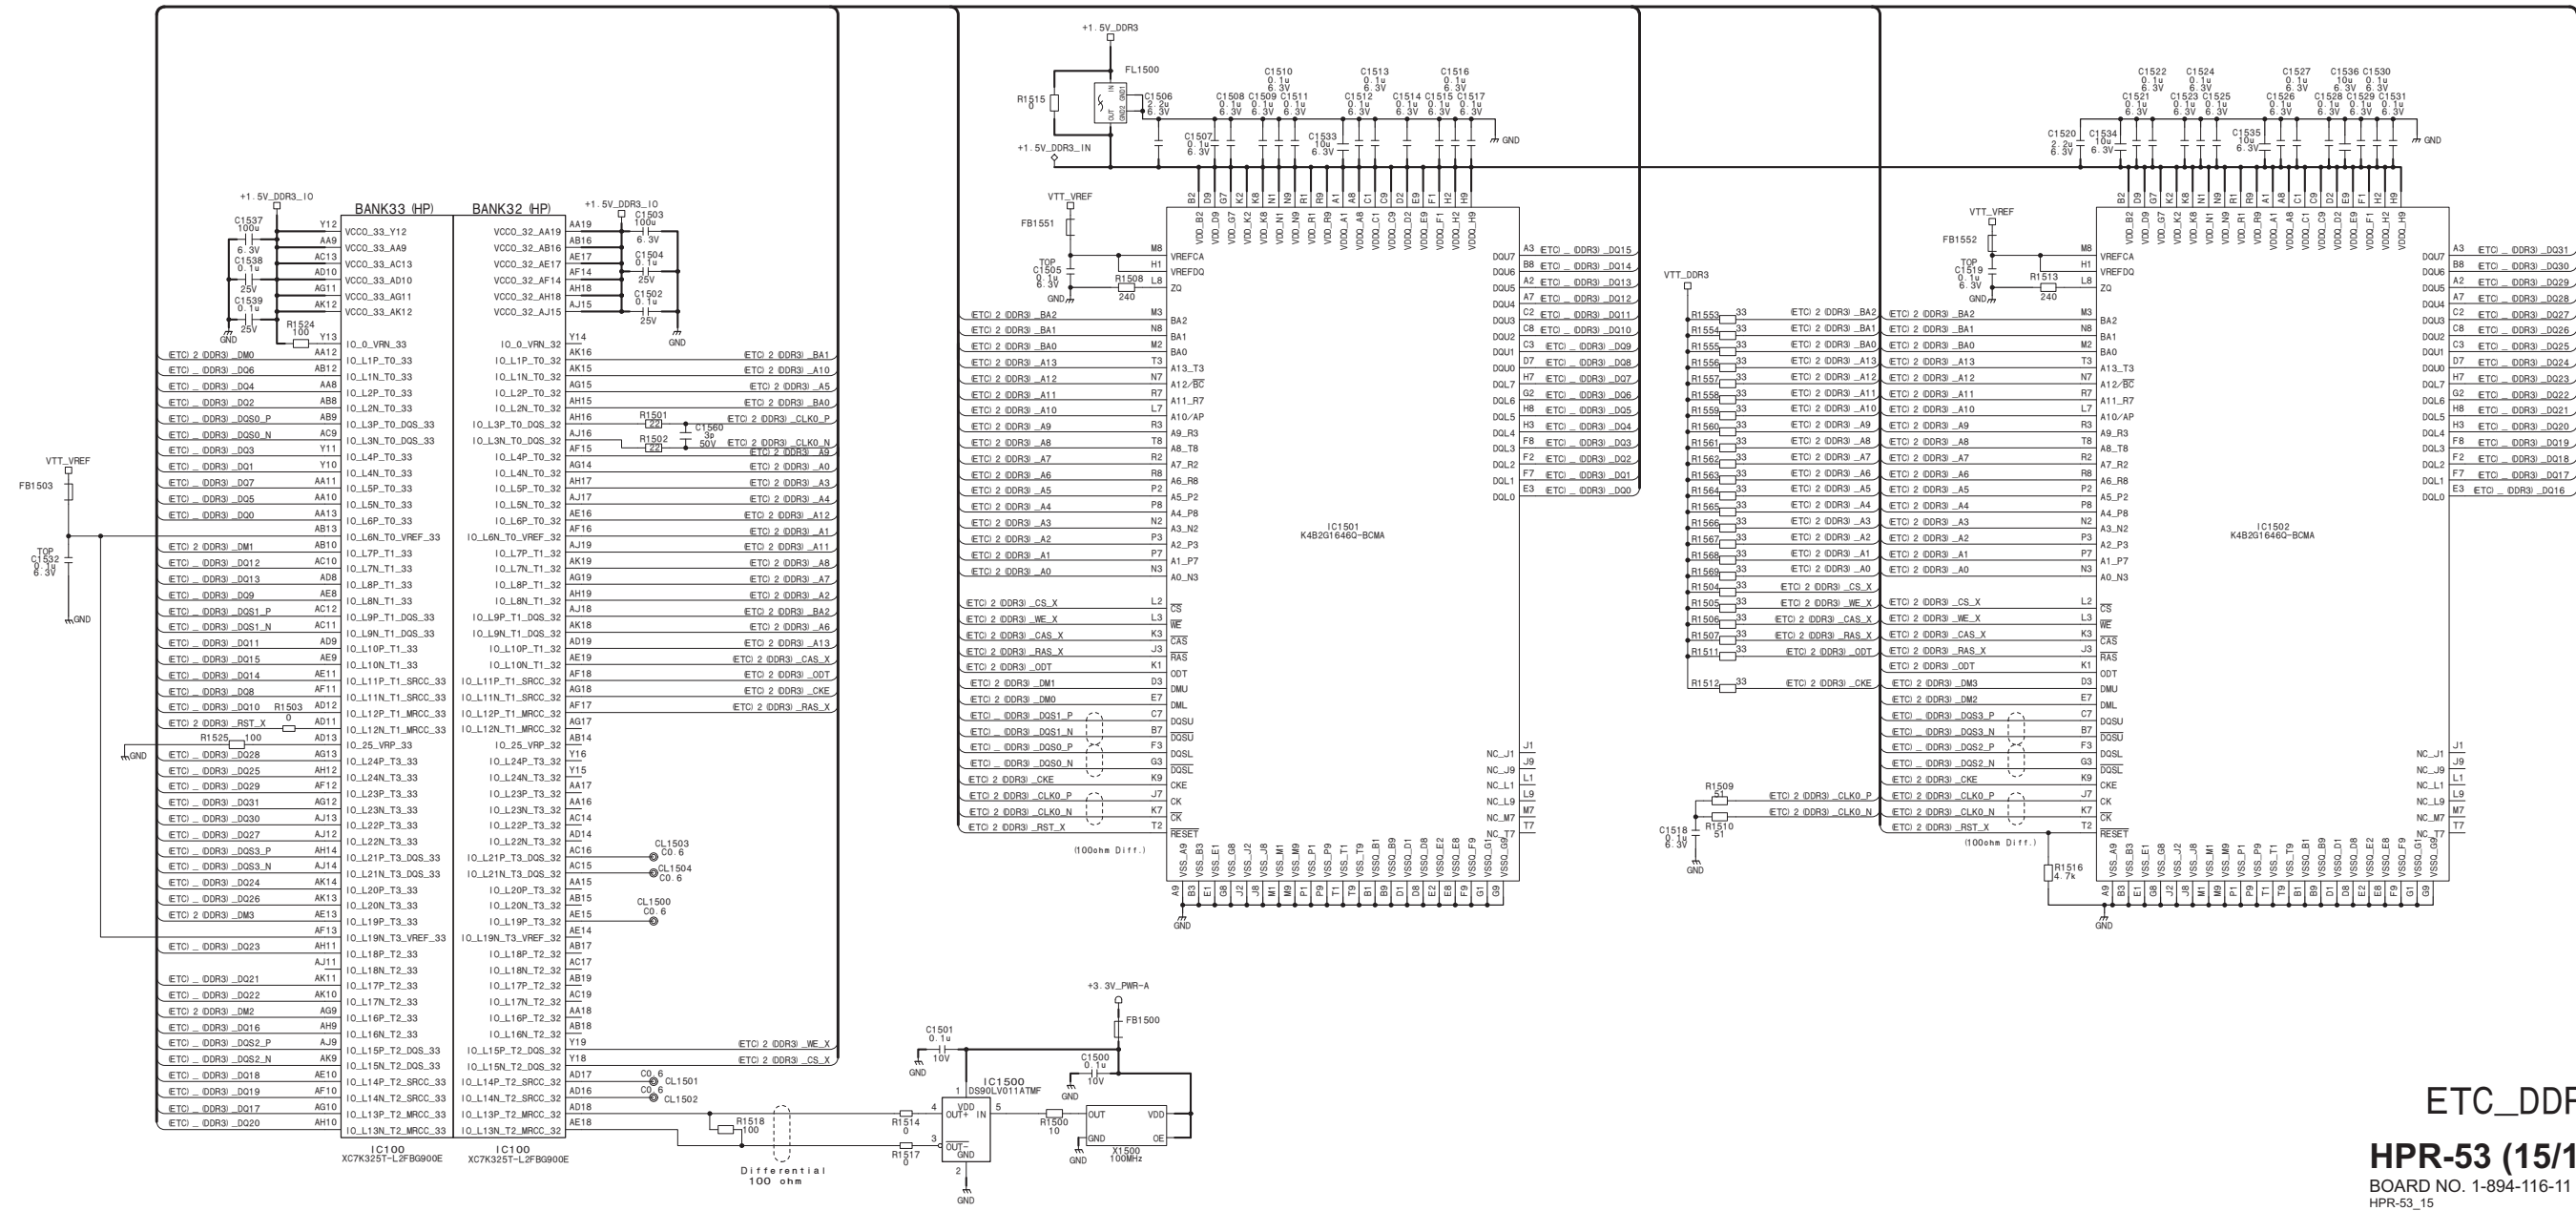





ETC_DDR3

HPR-53 (15/15)


BOARD NO. 1-894-116-11
HPR-53_15

IF-1209
IF-1209 (1/2)

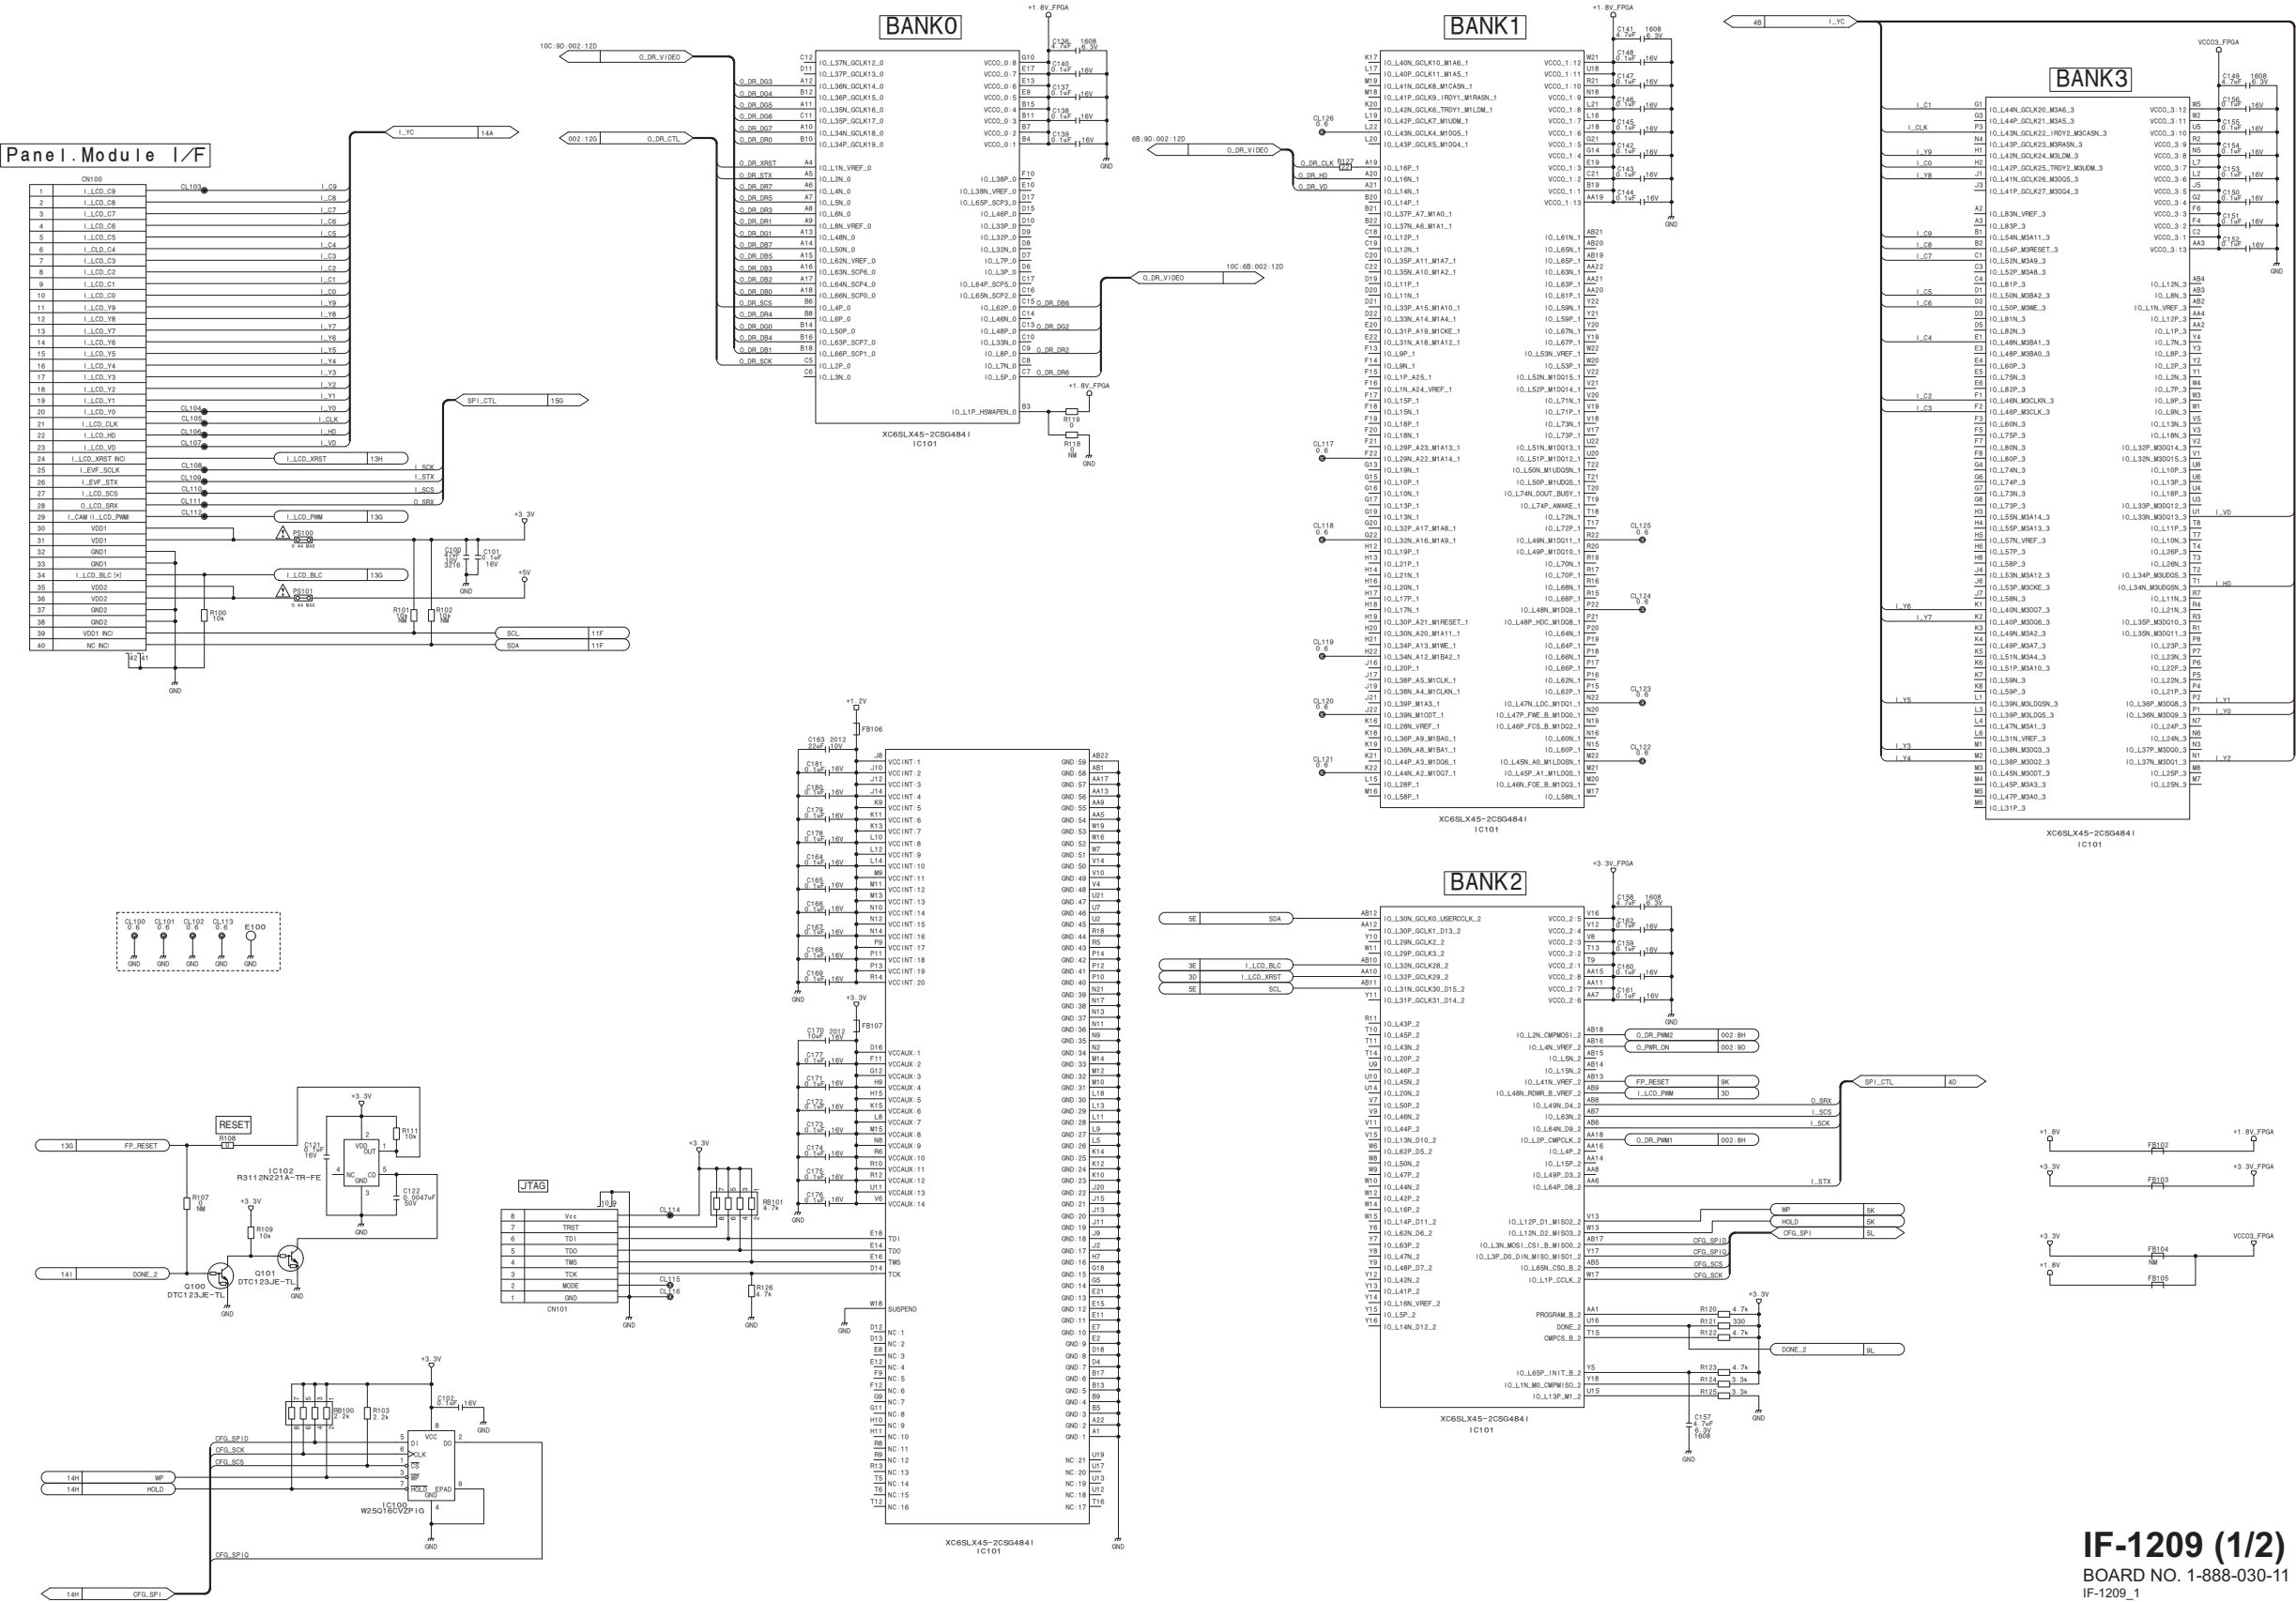

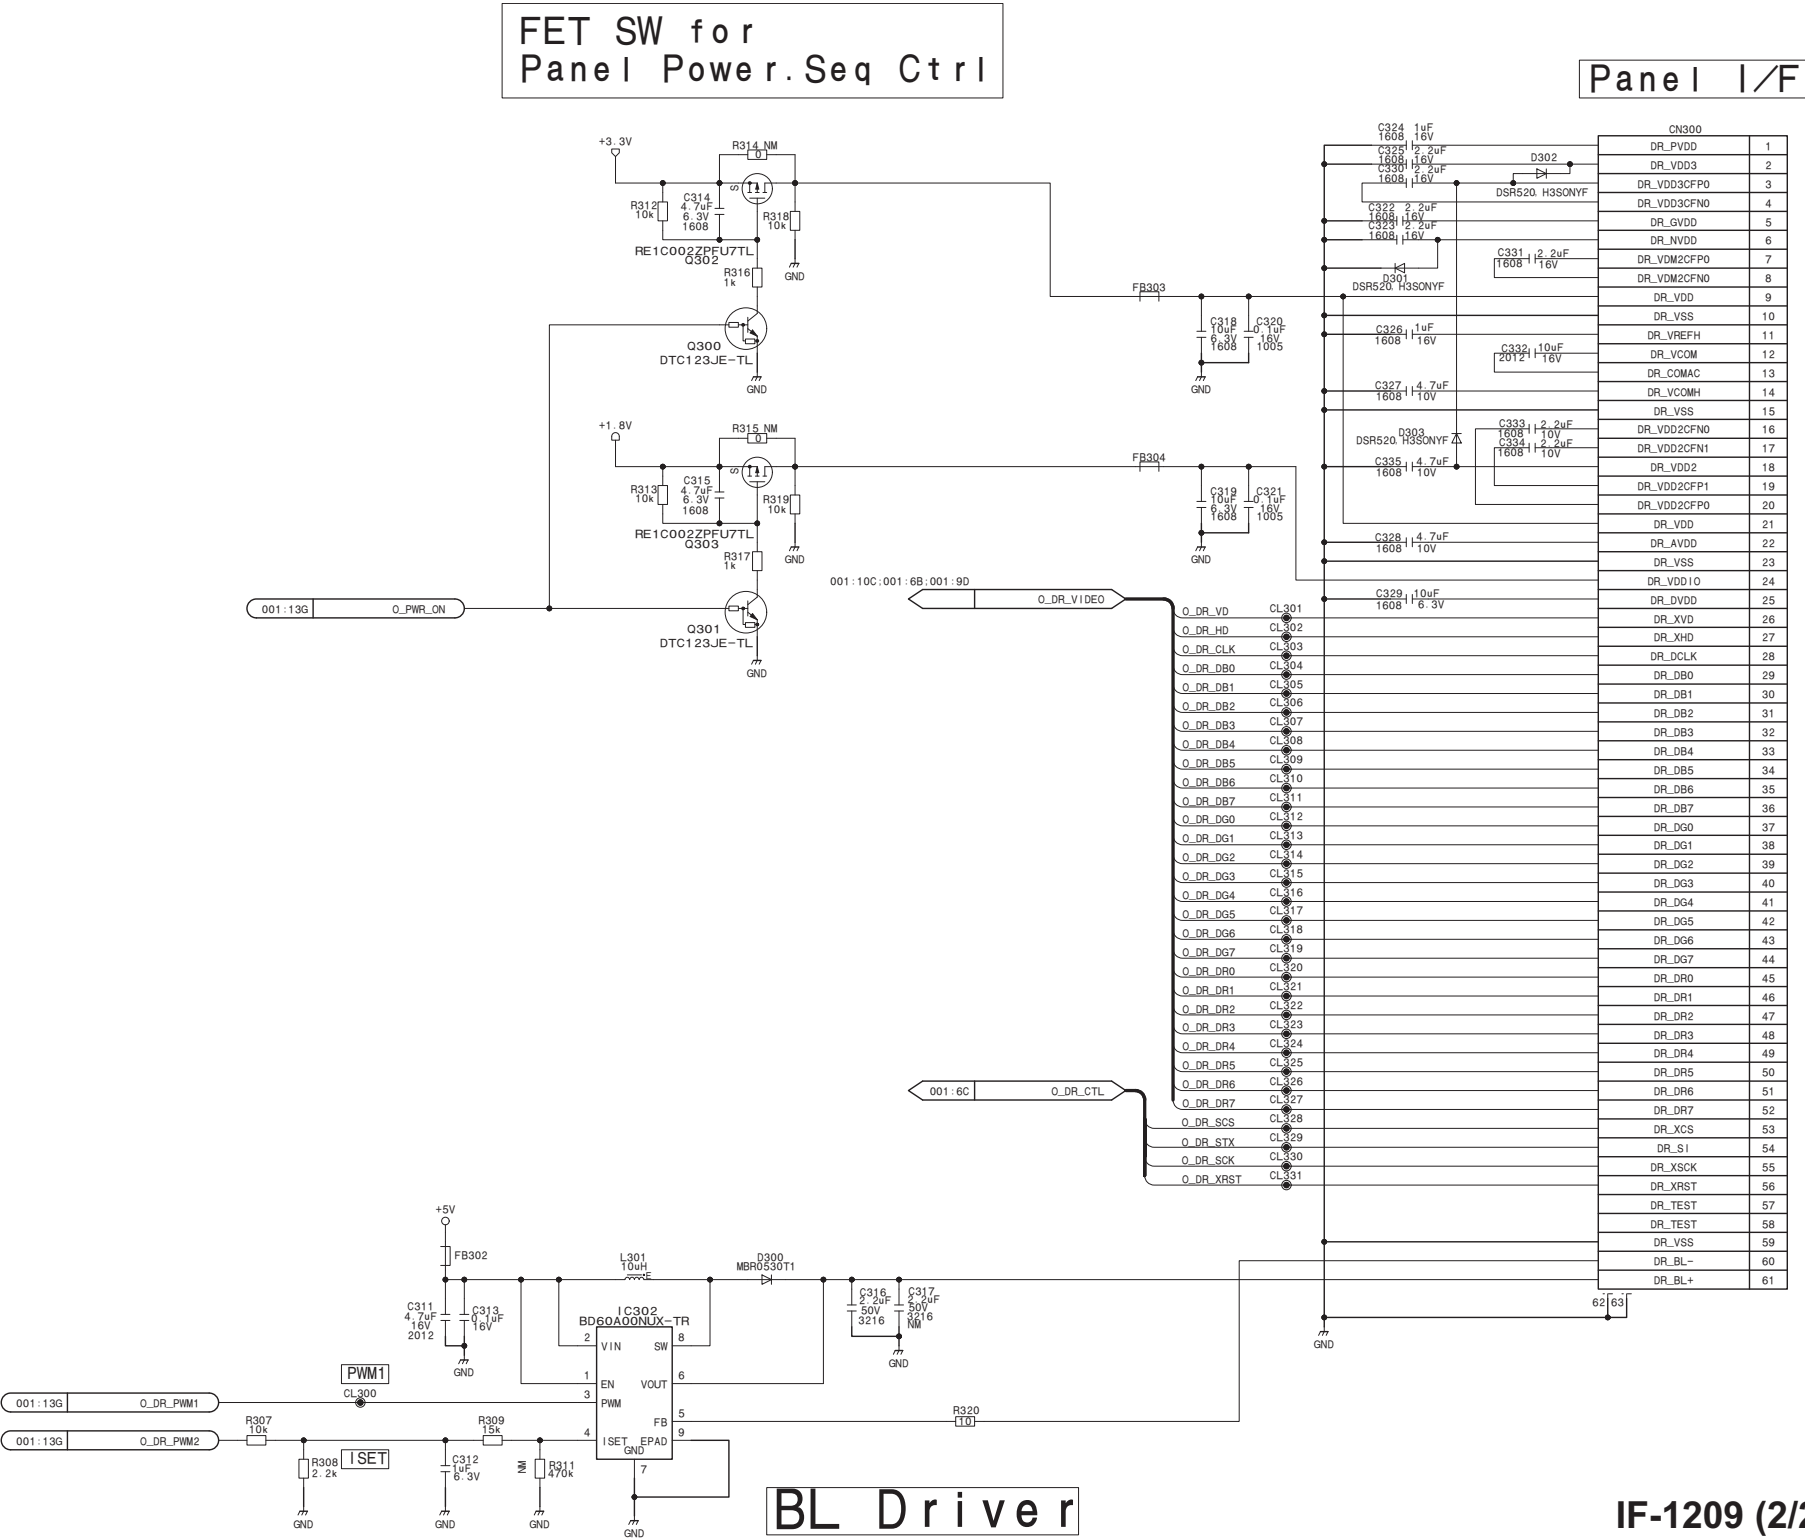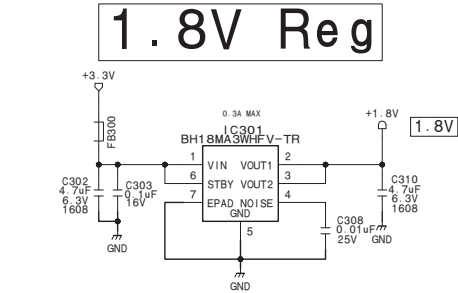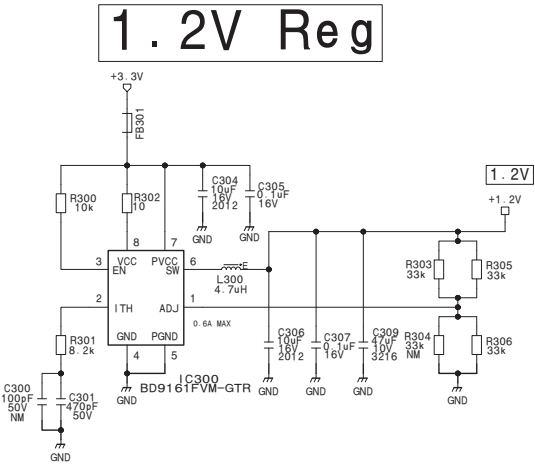


IO-275

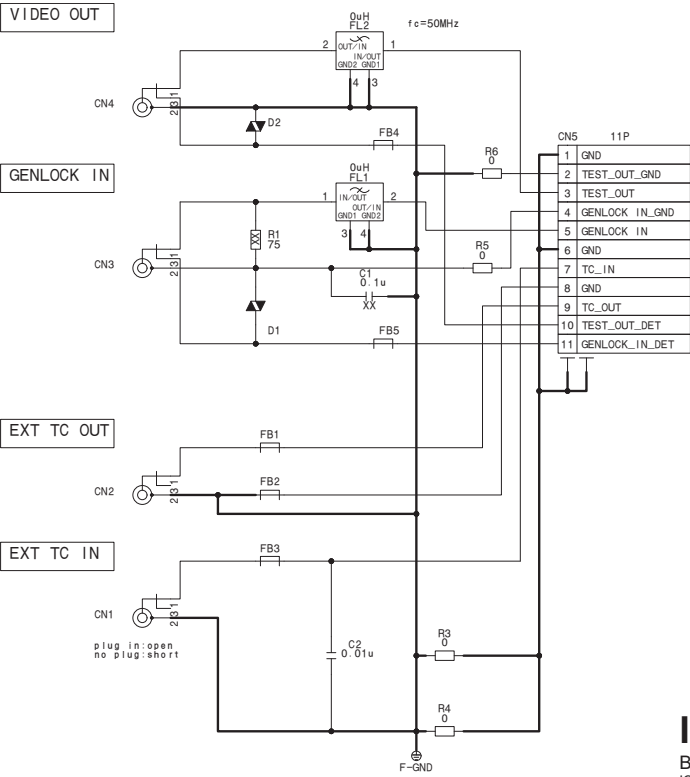


IO-275
BOARD NO. 1-893-712-11
IO-275_1

KY-736

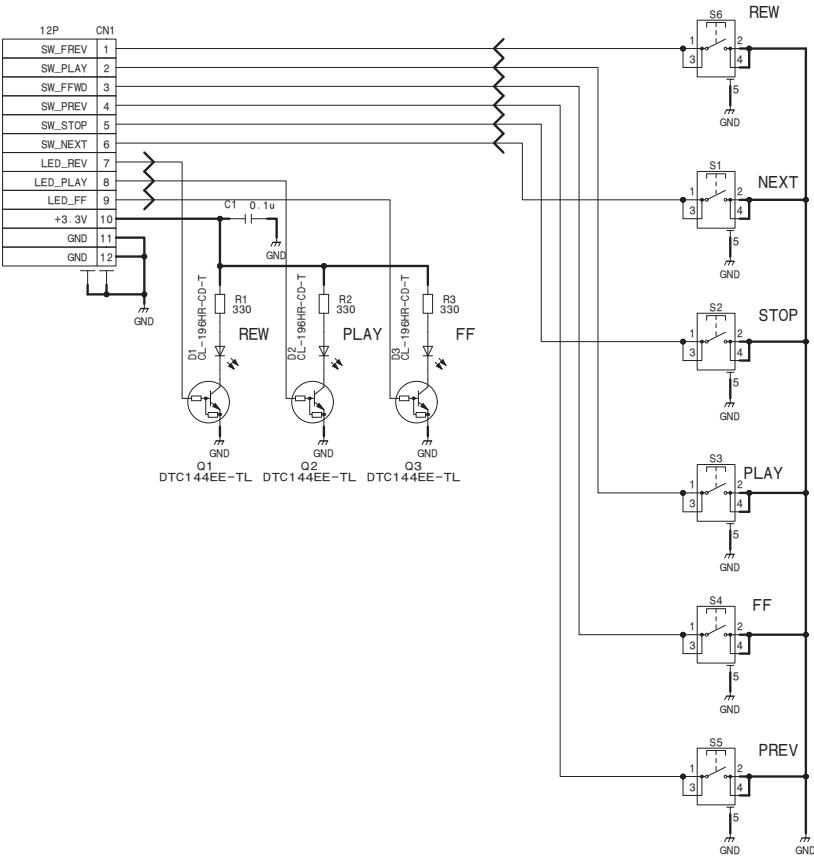




KY-736
BOARD NO. 1-893-713-11
KY-736_1

LED-529

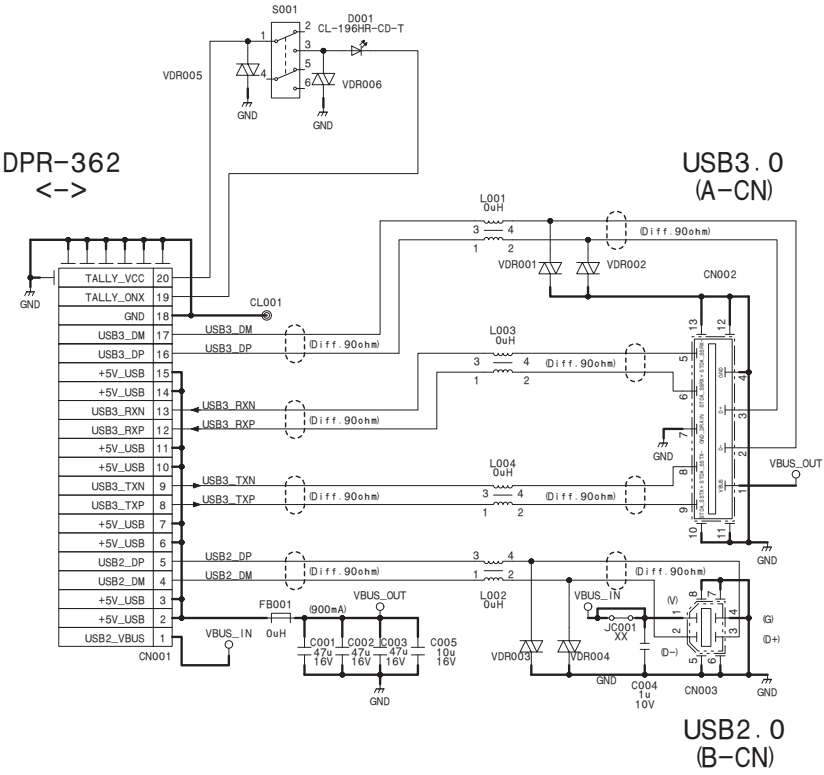

LED-529
BOARD NO. 1-893-716-12
LED-529_1

MB-1210
MB-1210 (1/2)

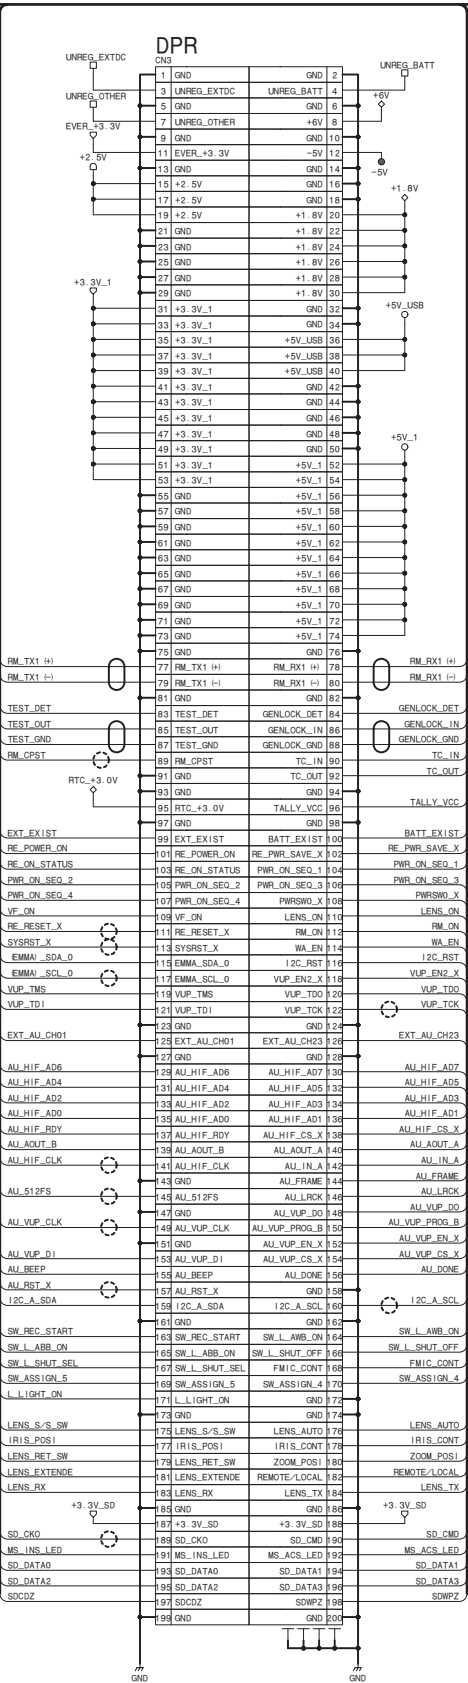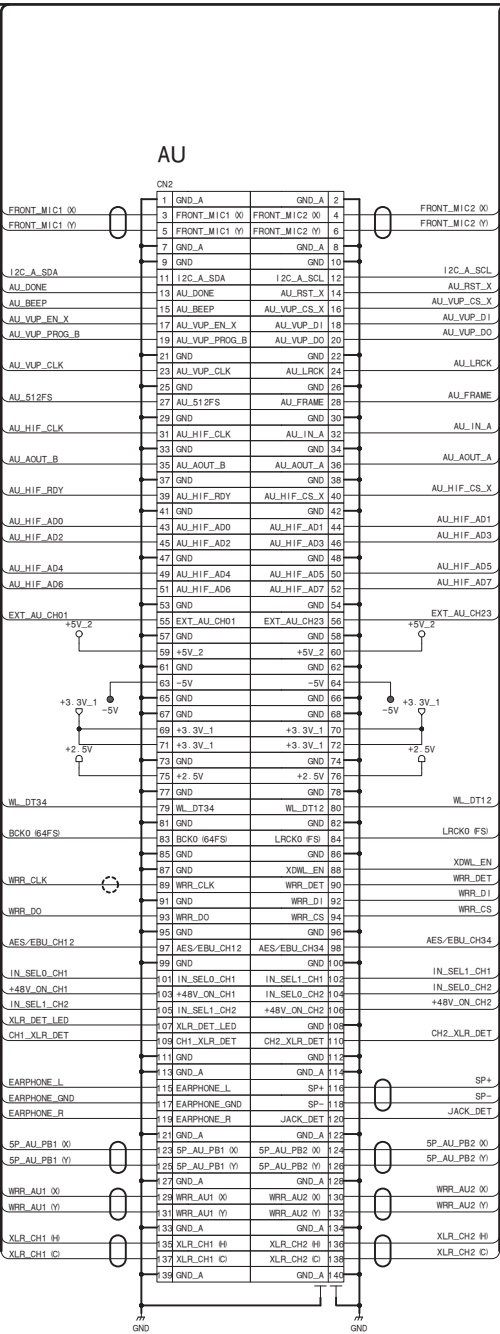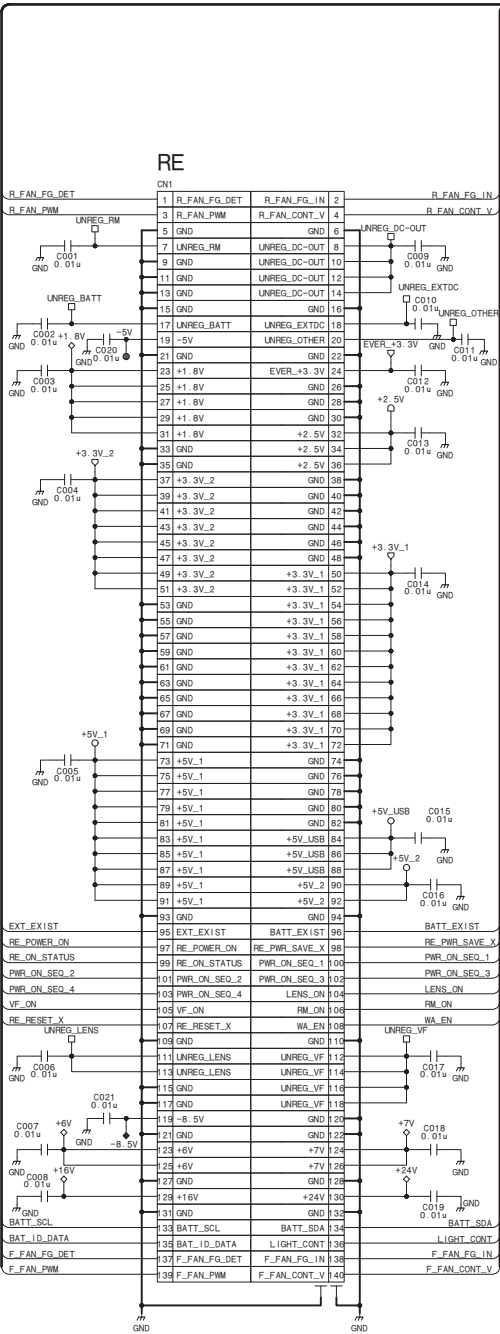


MB_BUS 002-B2

○ GND GUARD
○ PAIR GND GUARD


MB-1210 (1/2)
BOARD NO. 1-893-857-11
MB-1210_1

MB-1210 (2/2)

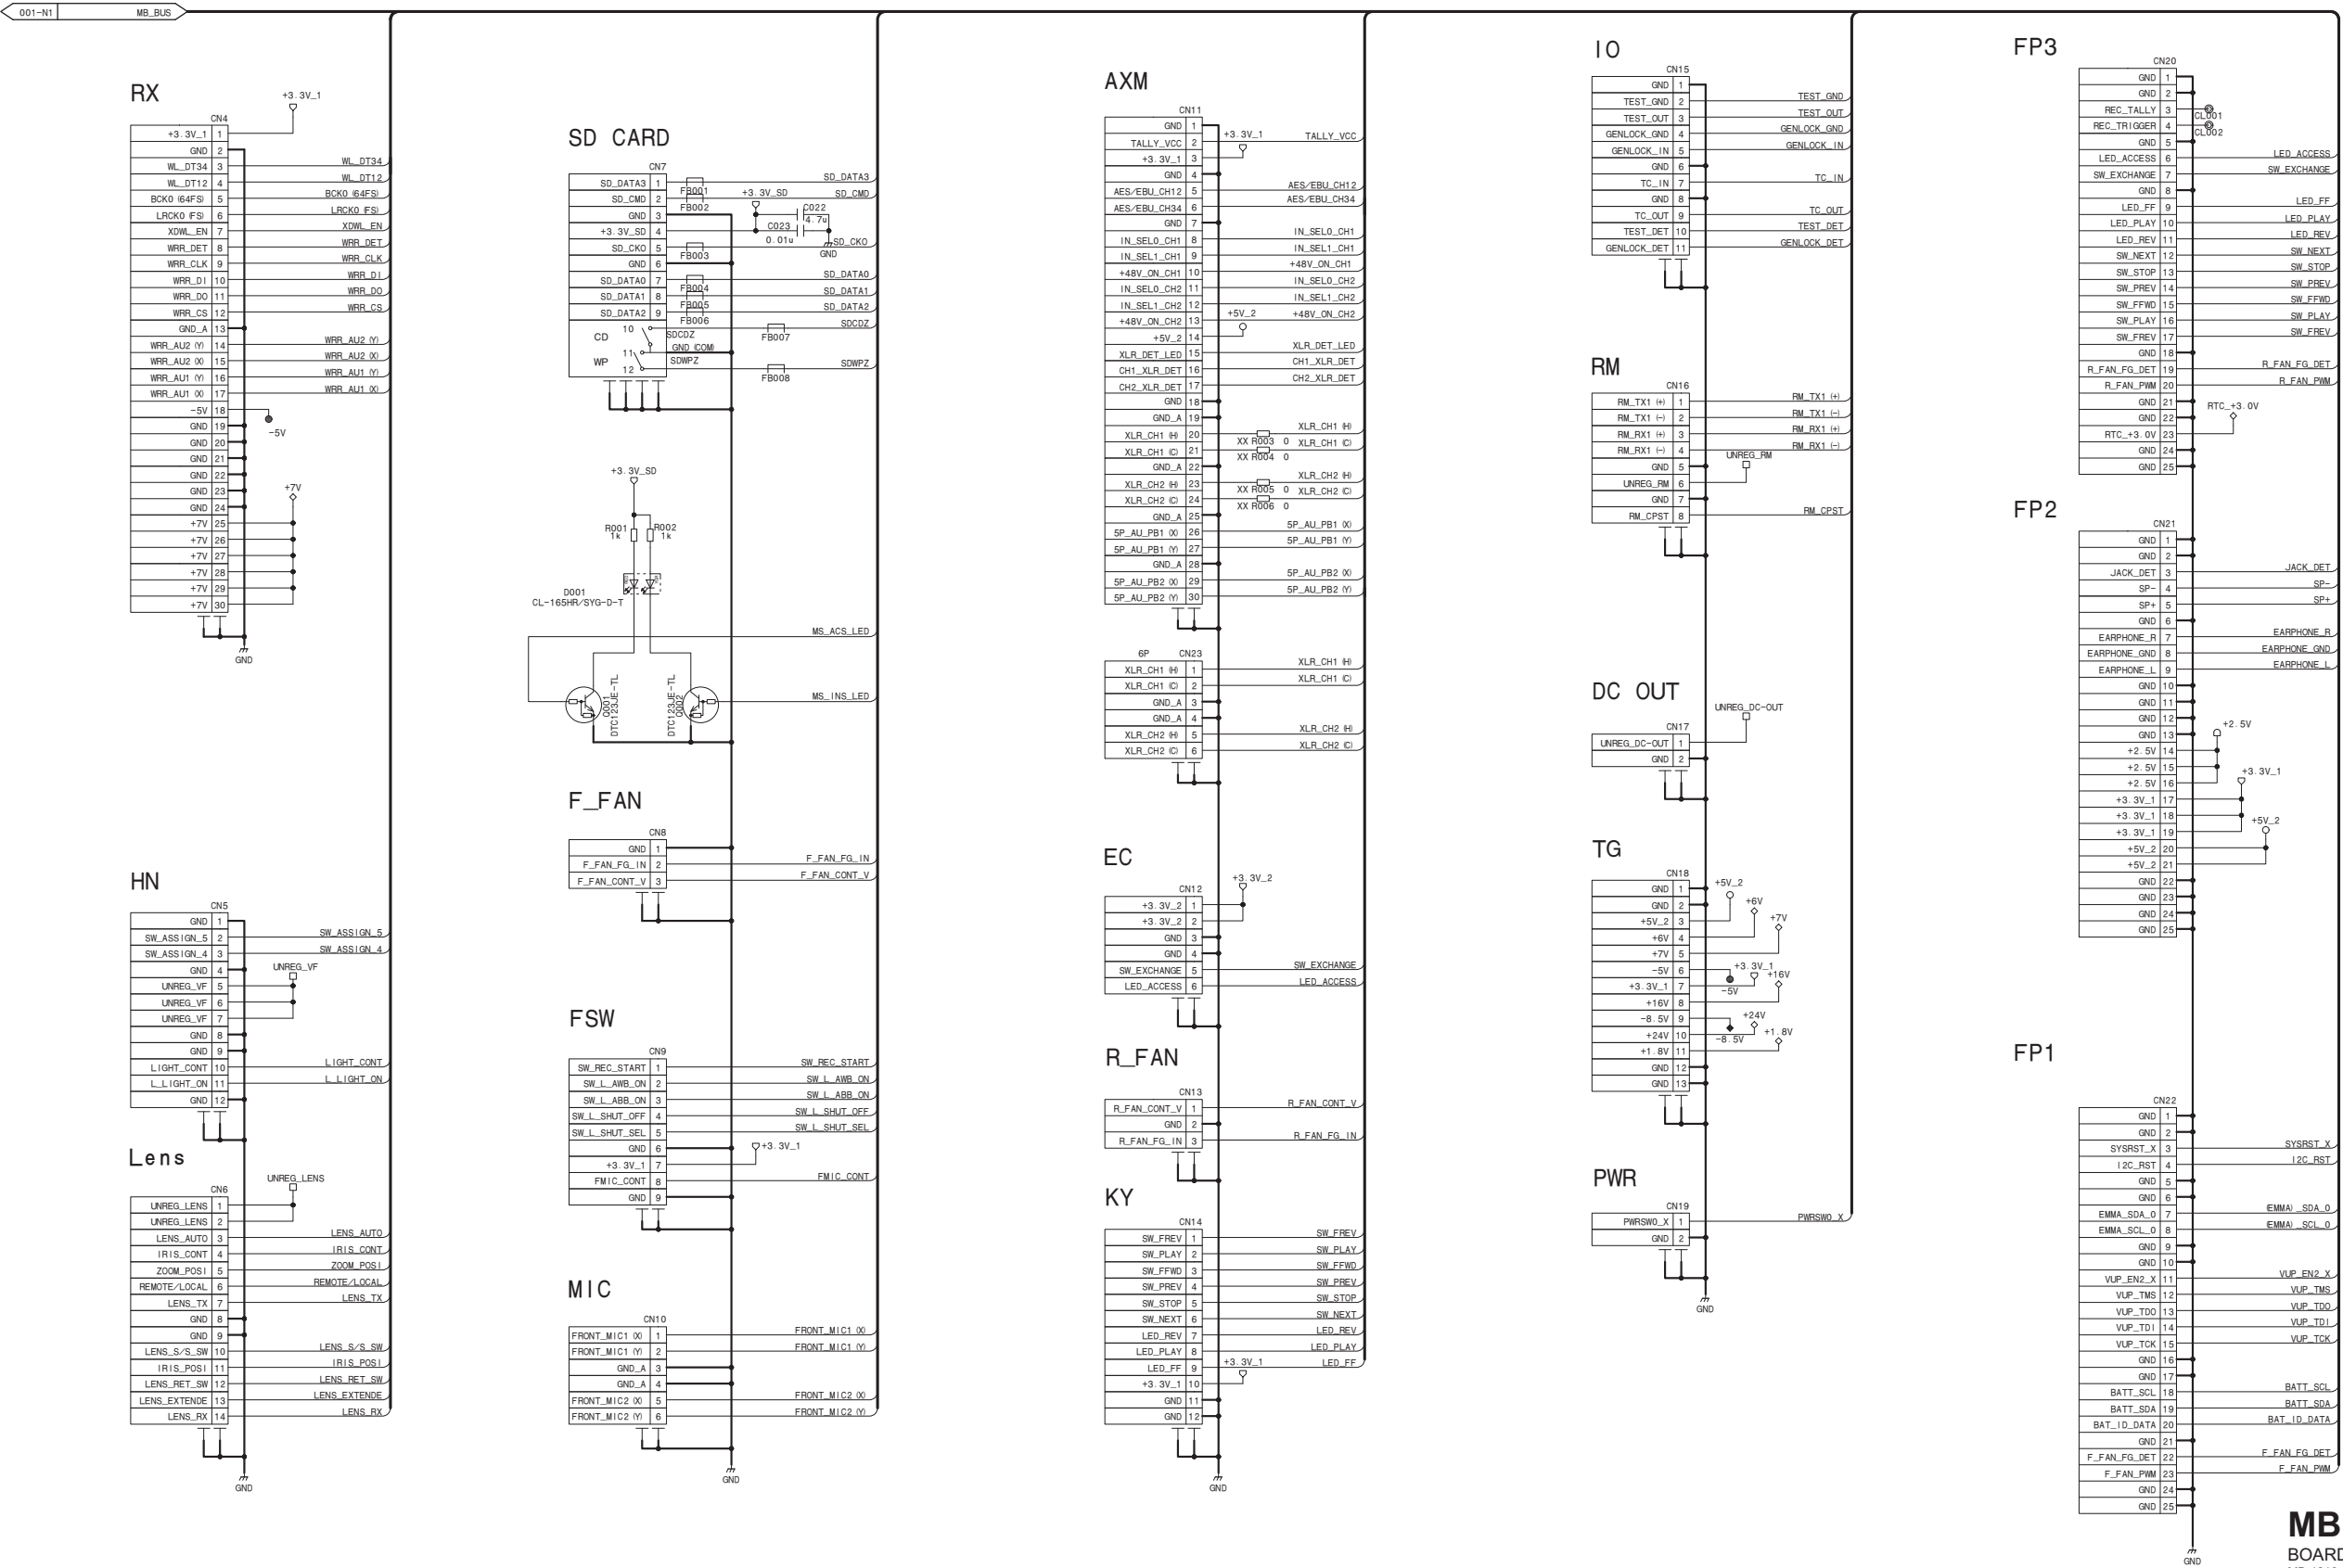

MB-1210 (2/2)
BOARD NO. 1-893-857-11
MB-1210_2


PA-422

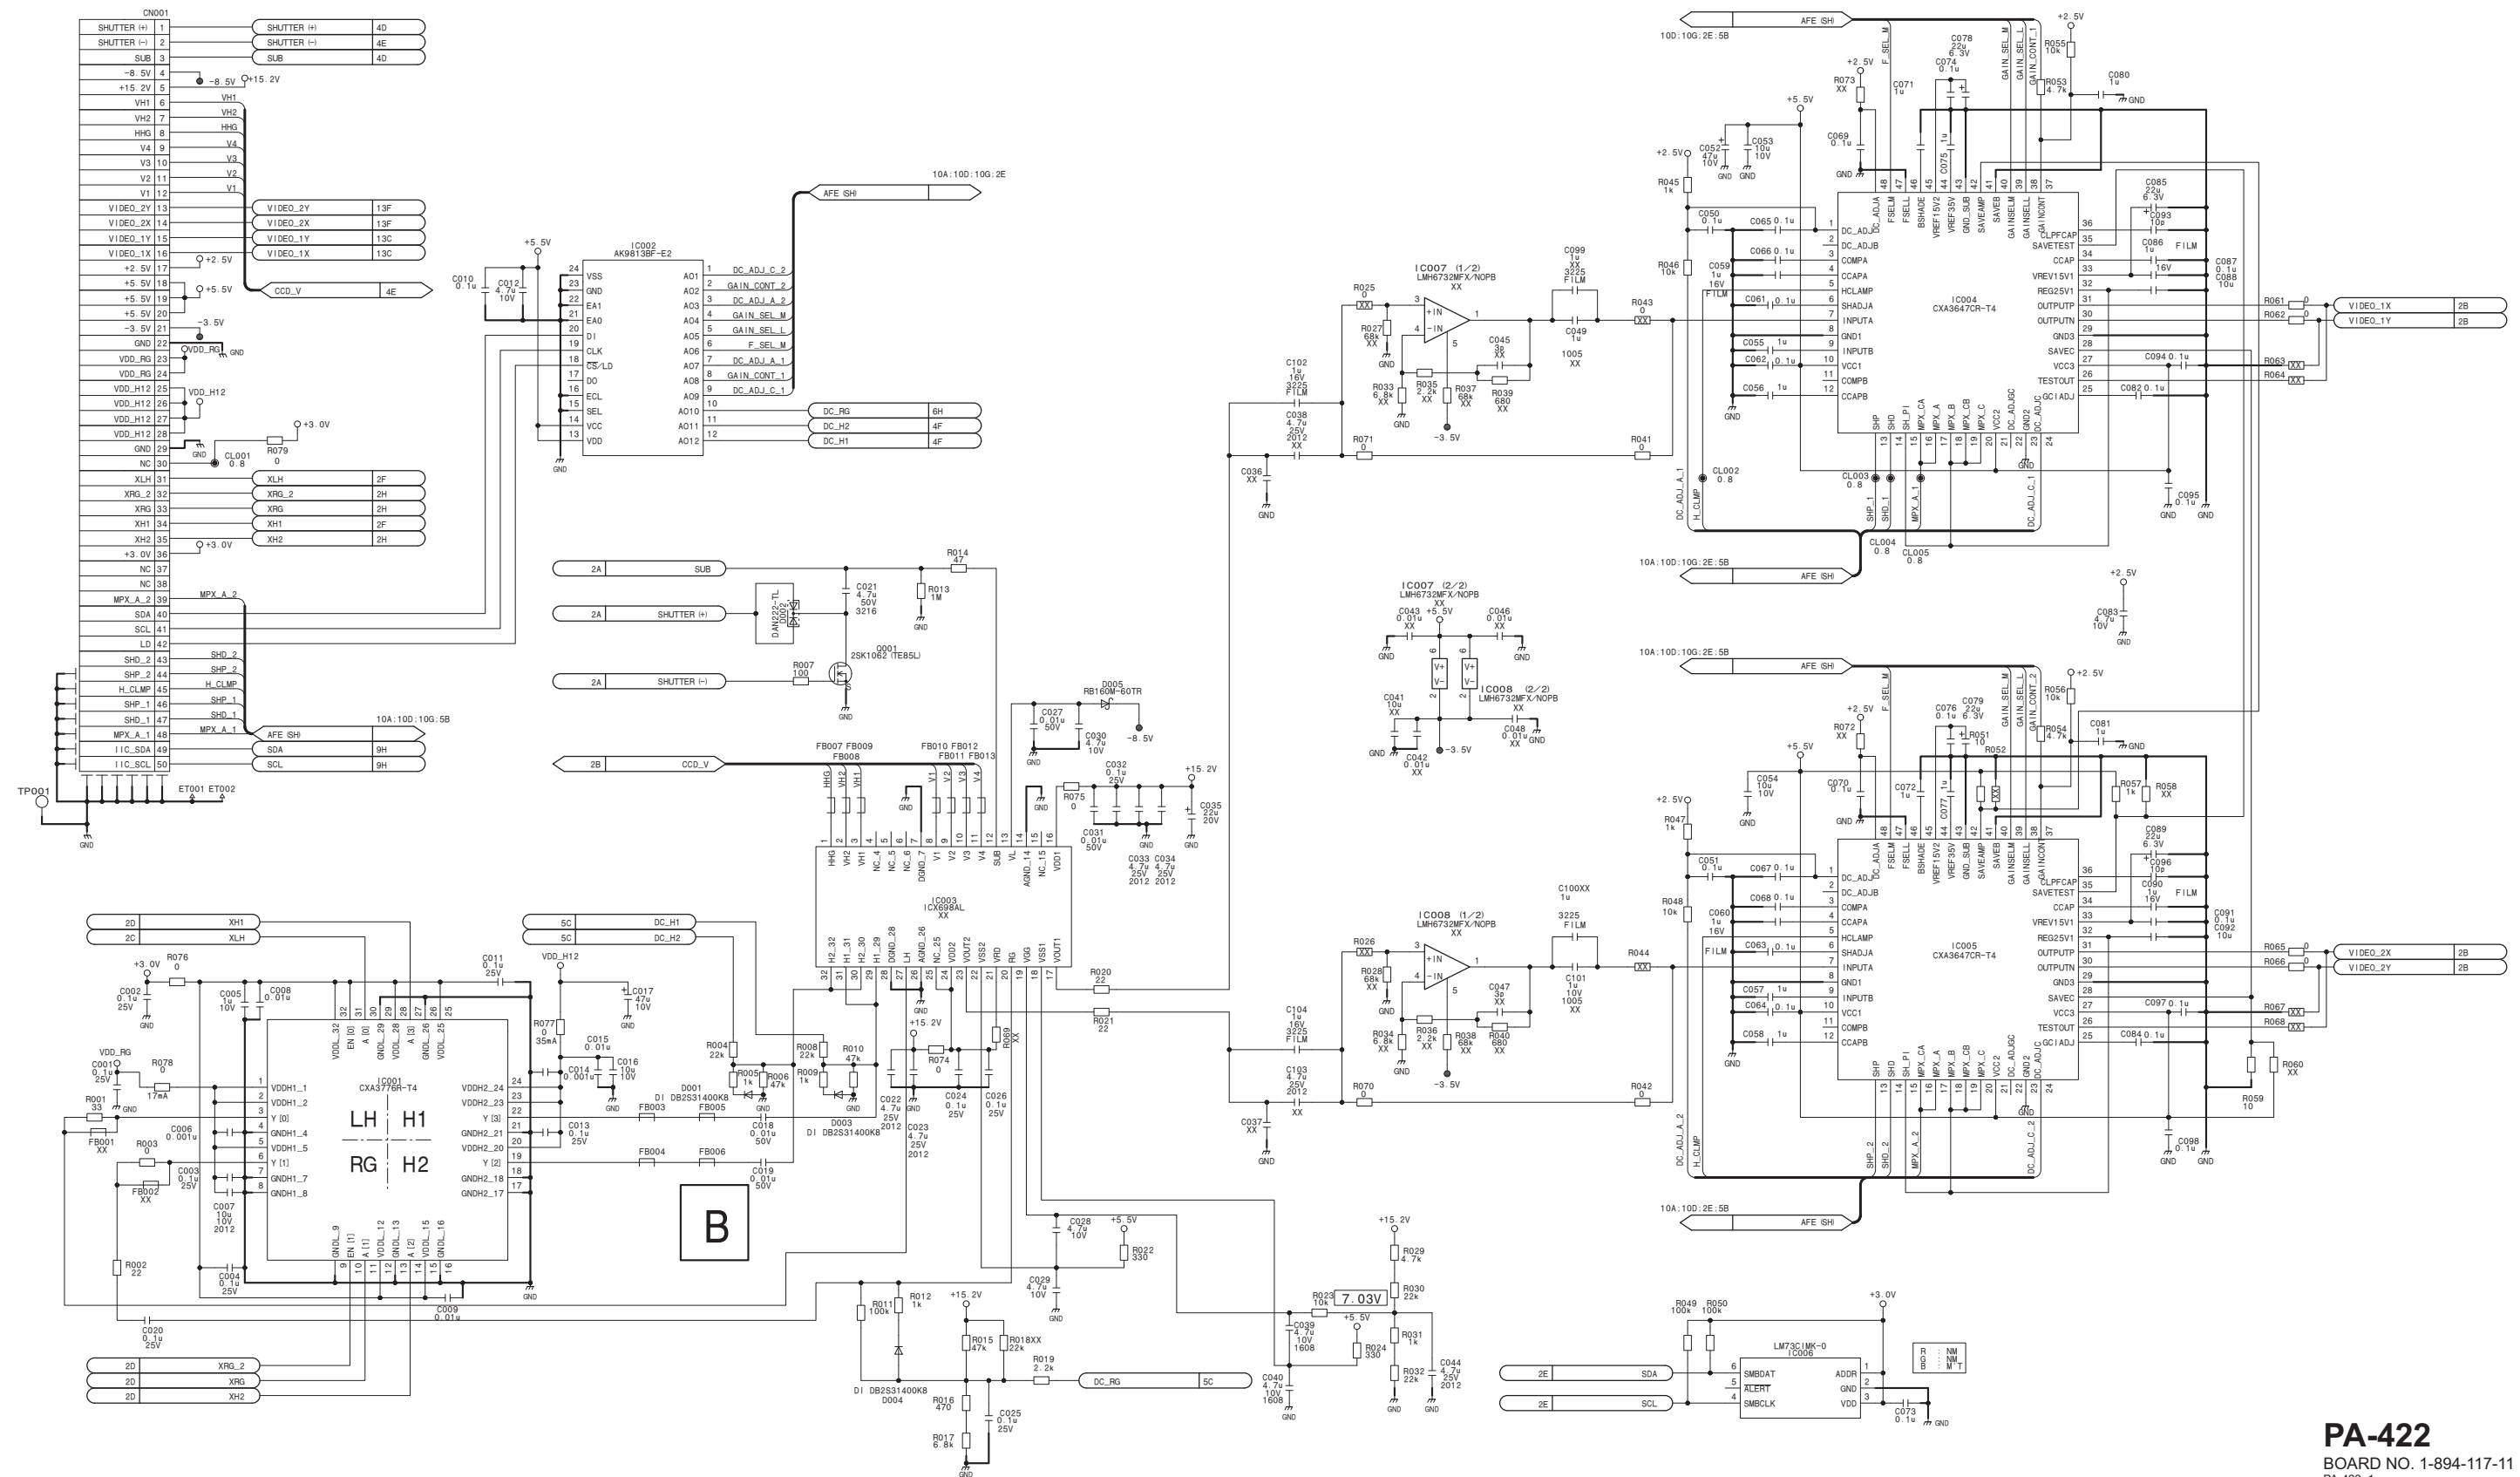

PA-422

BOARD NO. 1-894-117-11
PA-422_1


PA-423

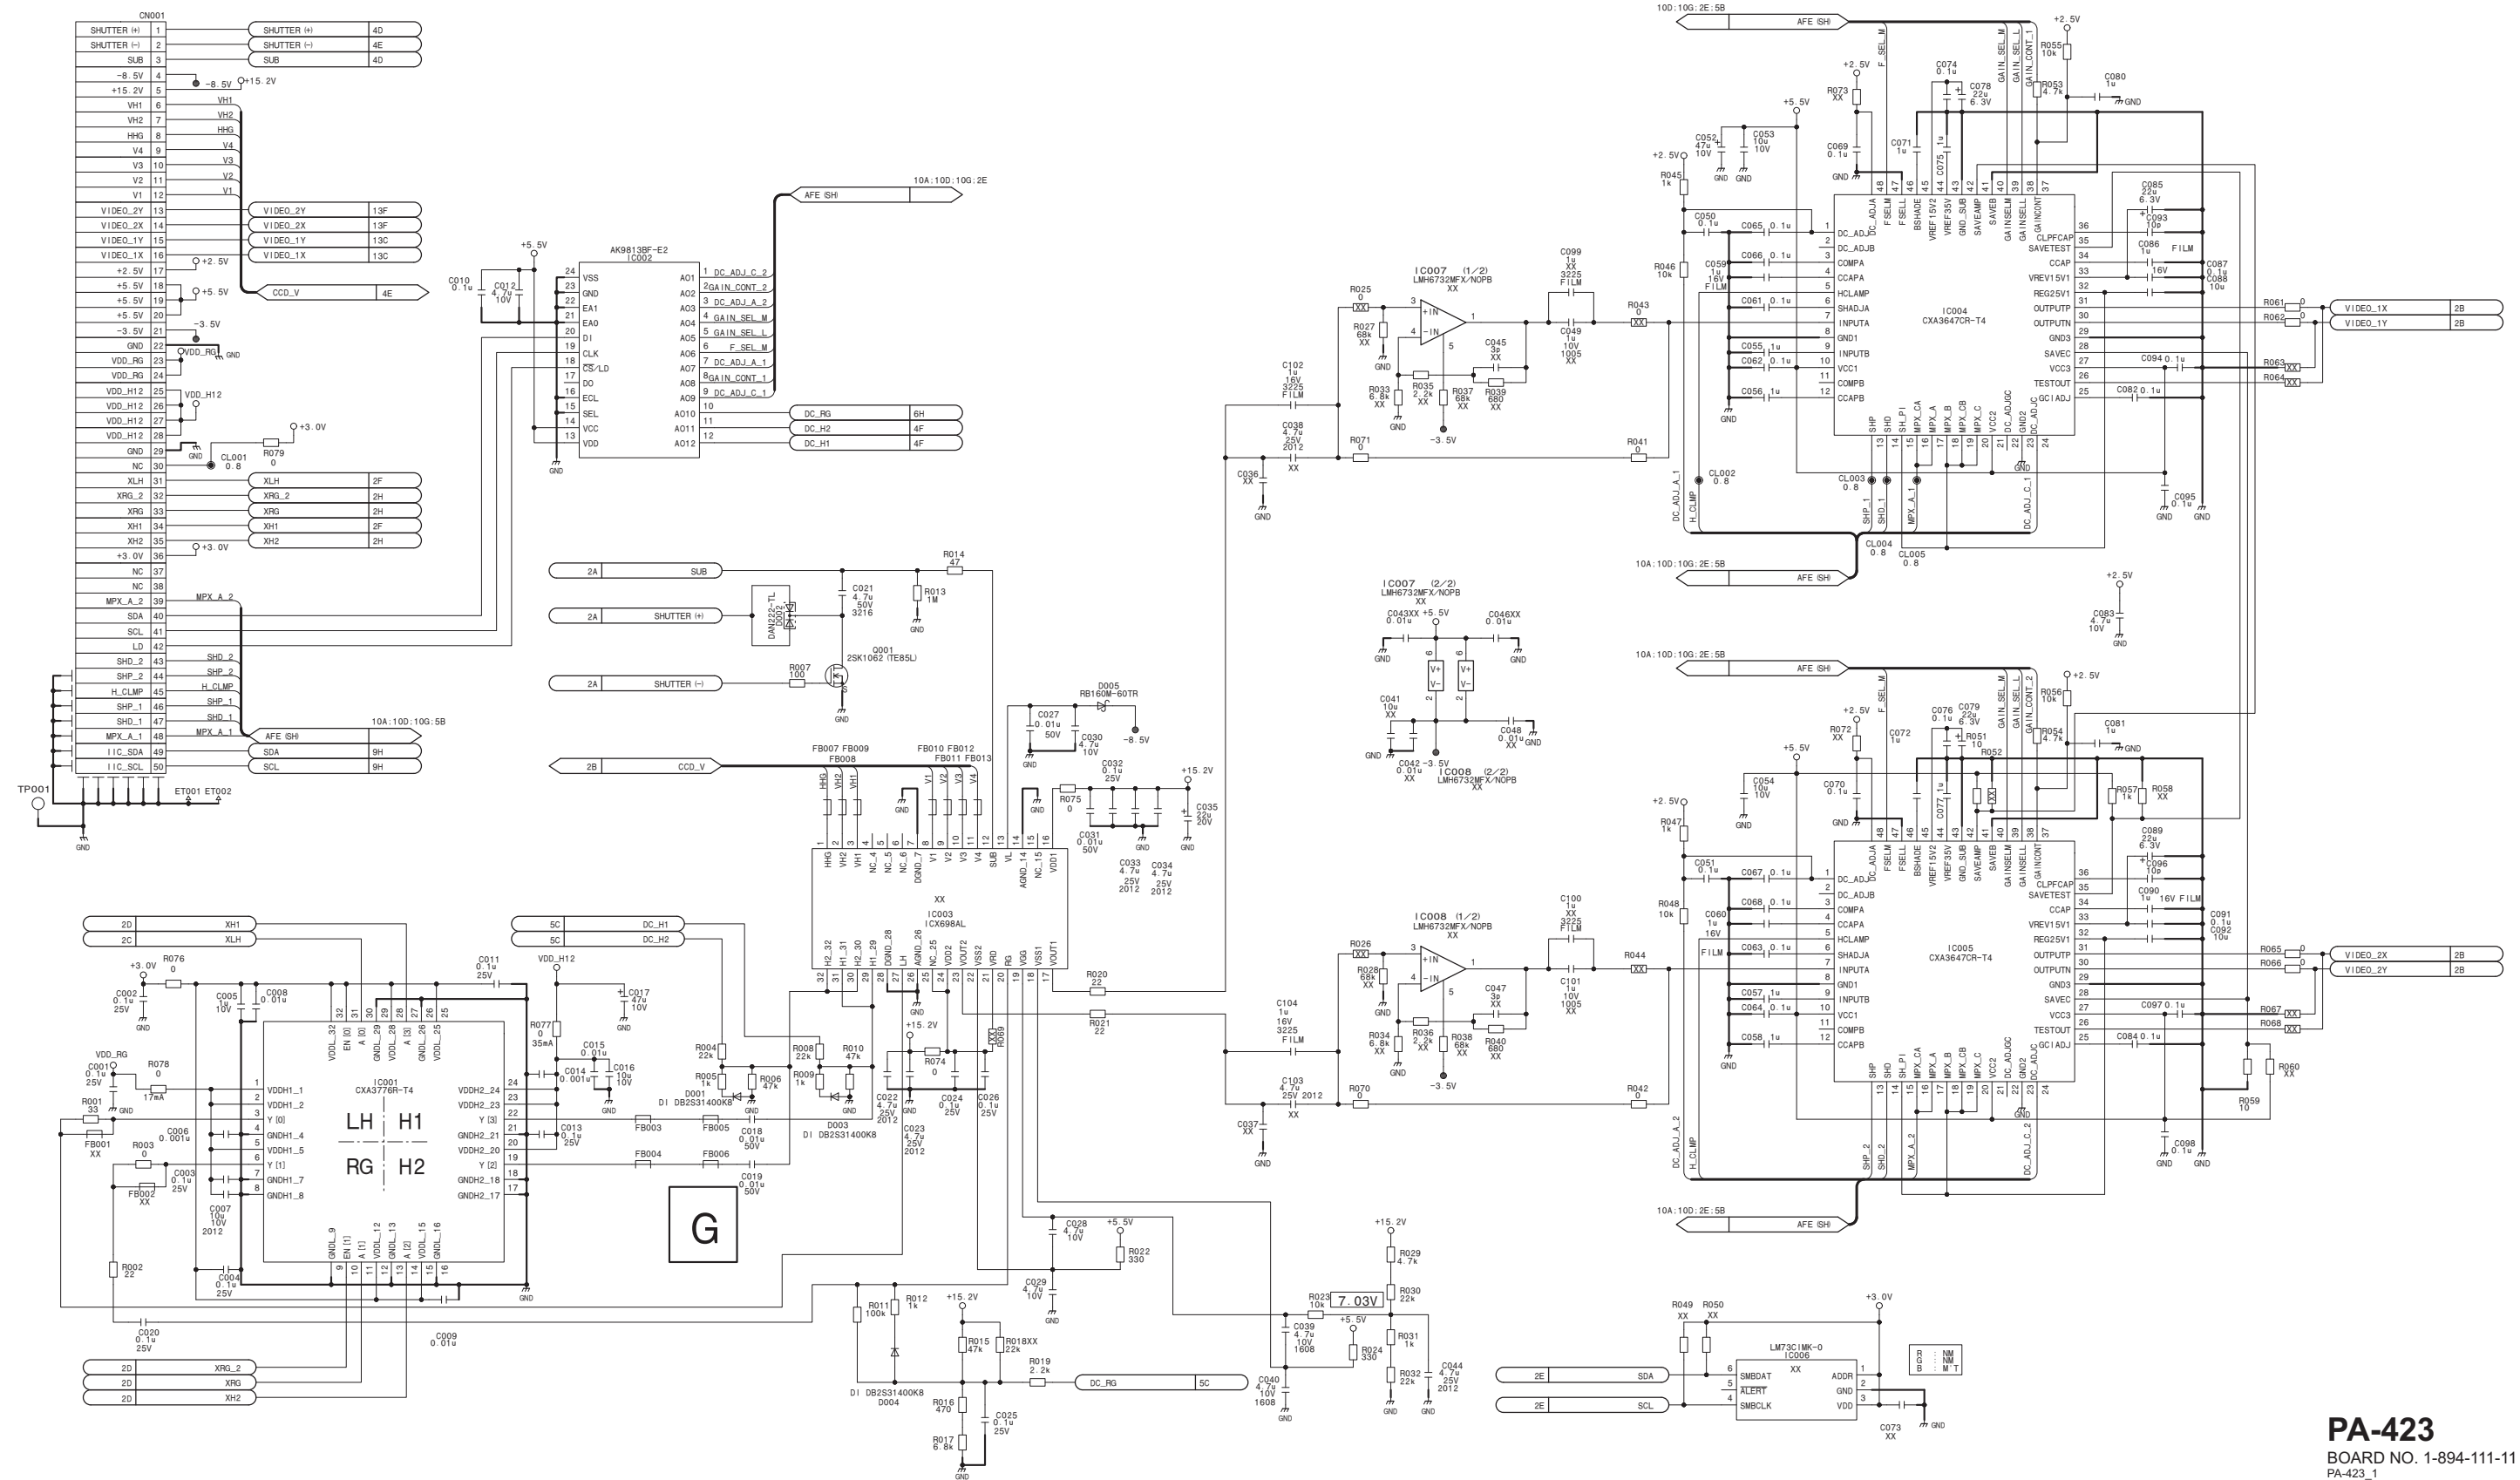

PA-423


BOARD NO. 1-894-111-11
PA-423_1

PA-424

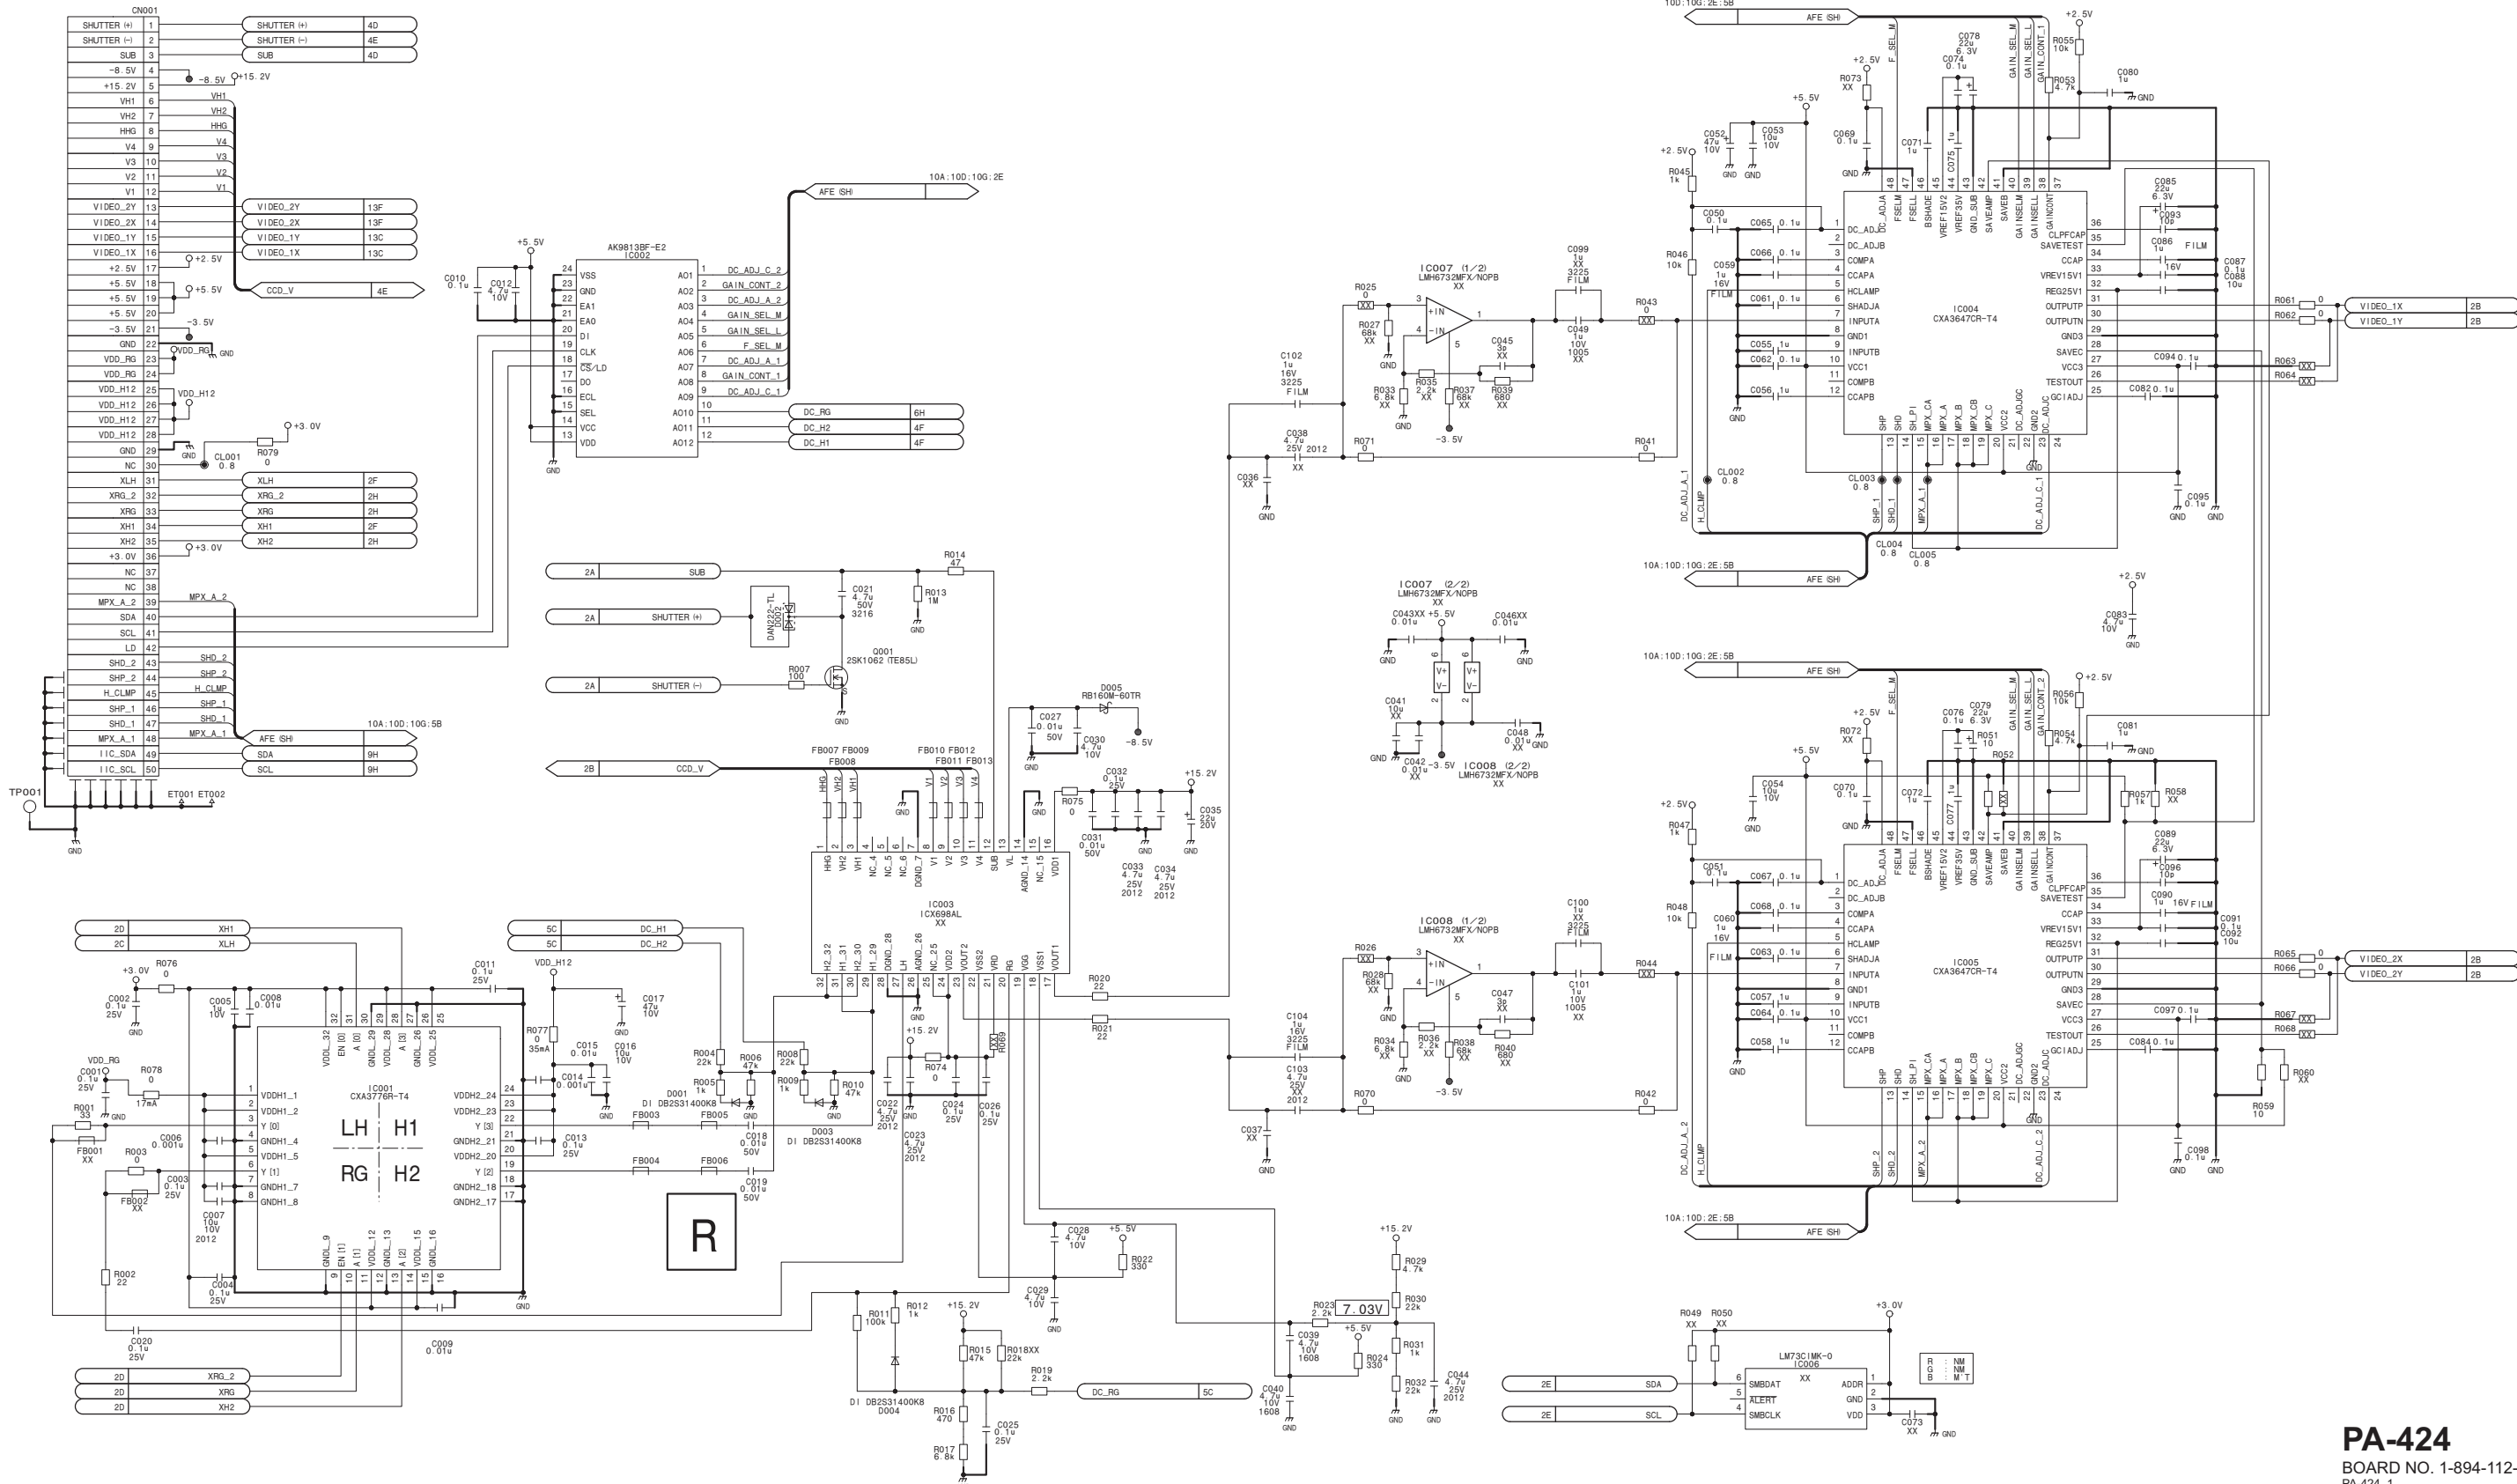

BOARD NO. 1-894-112-11
PA-424 1


RE-326
RE-326 (1/9)

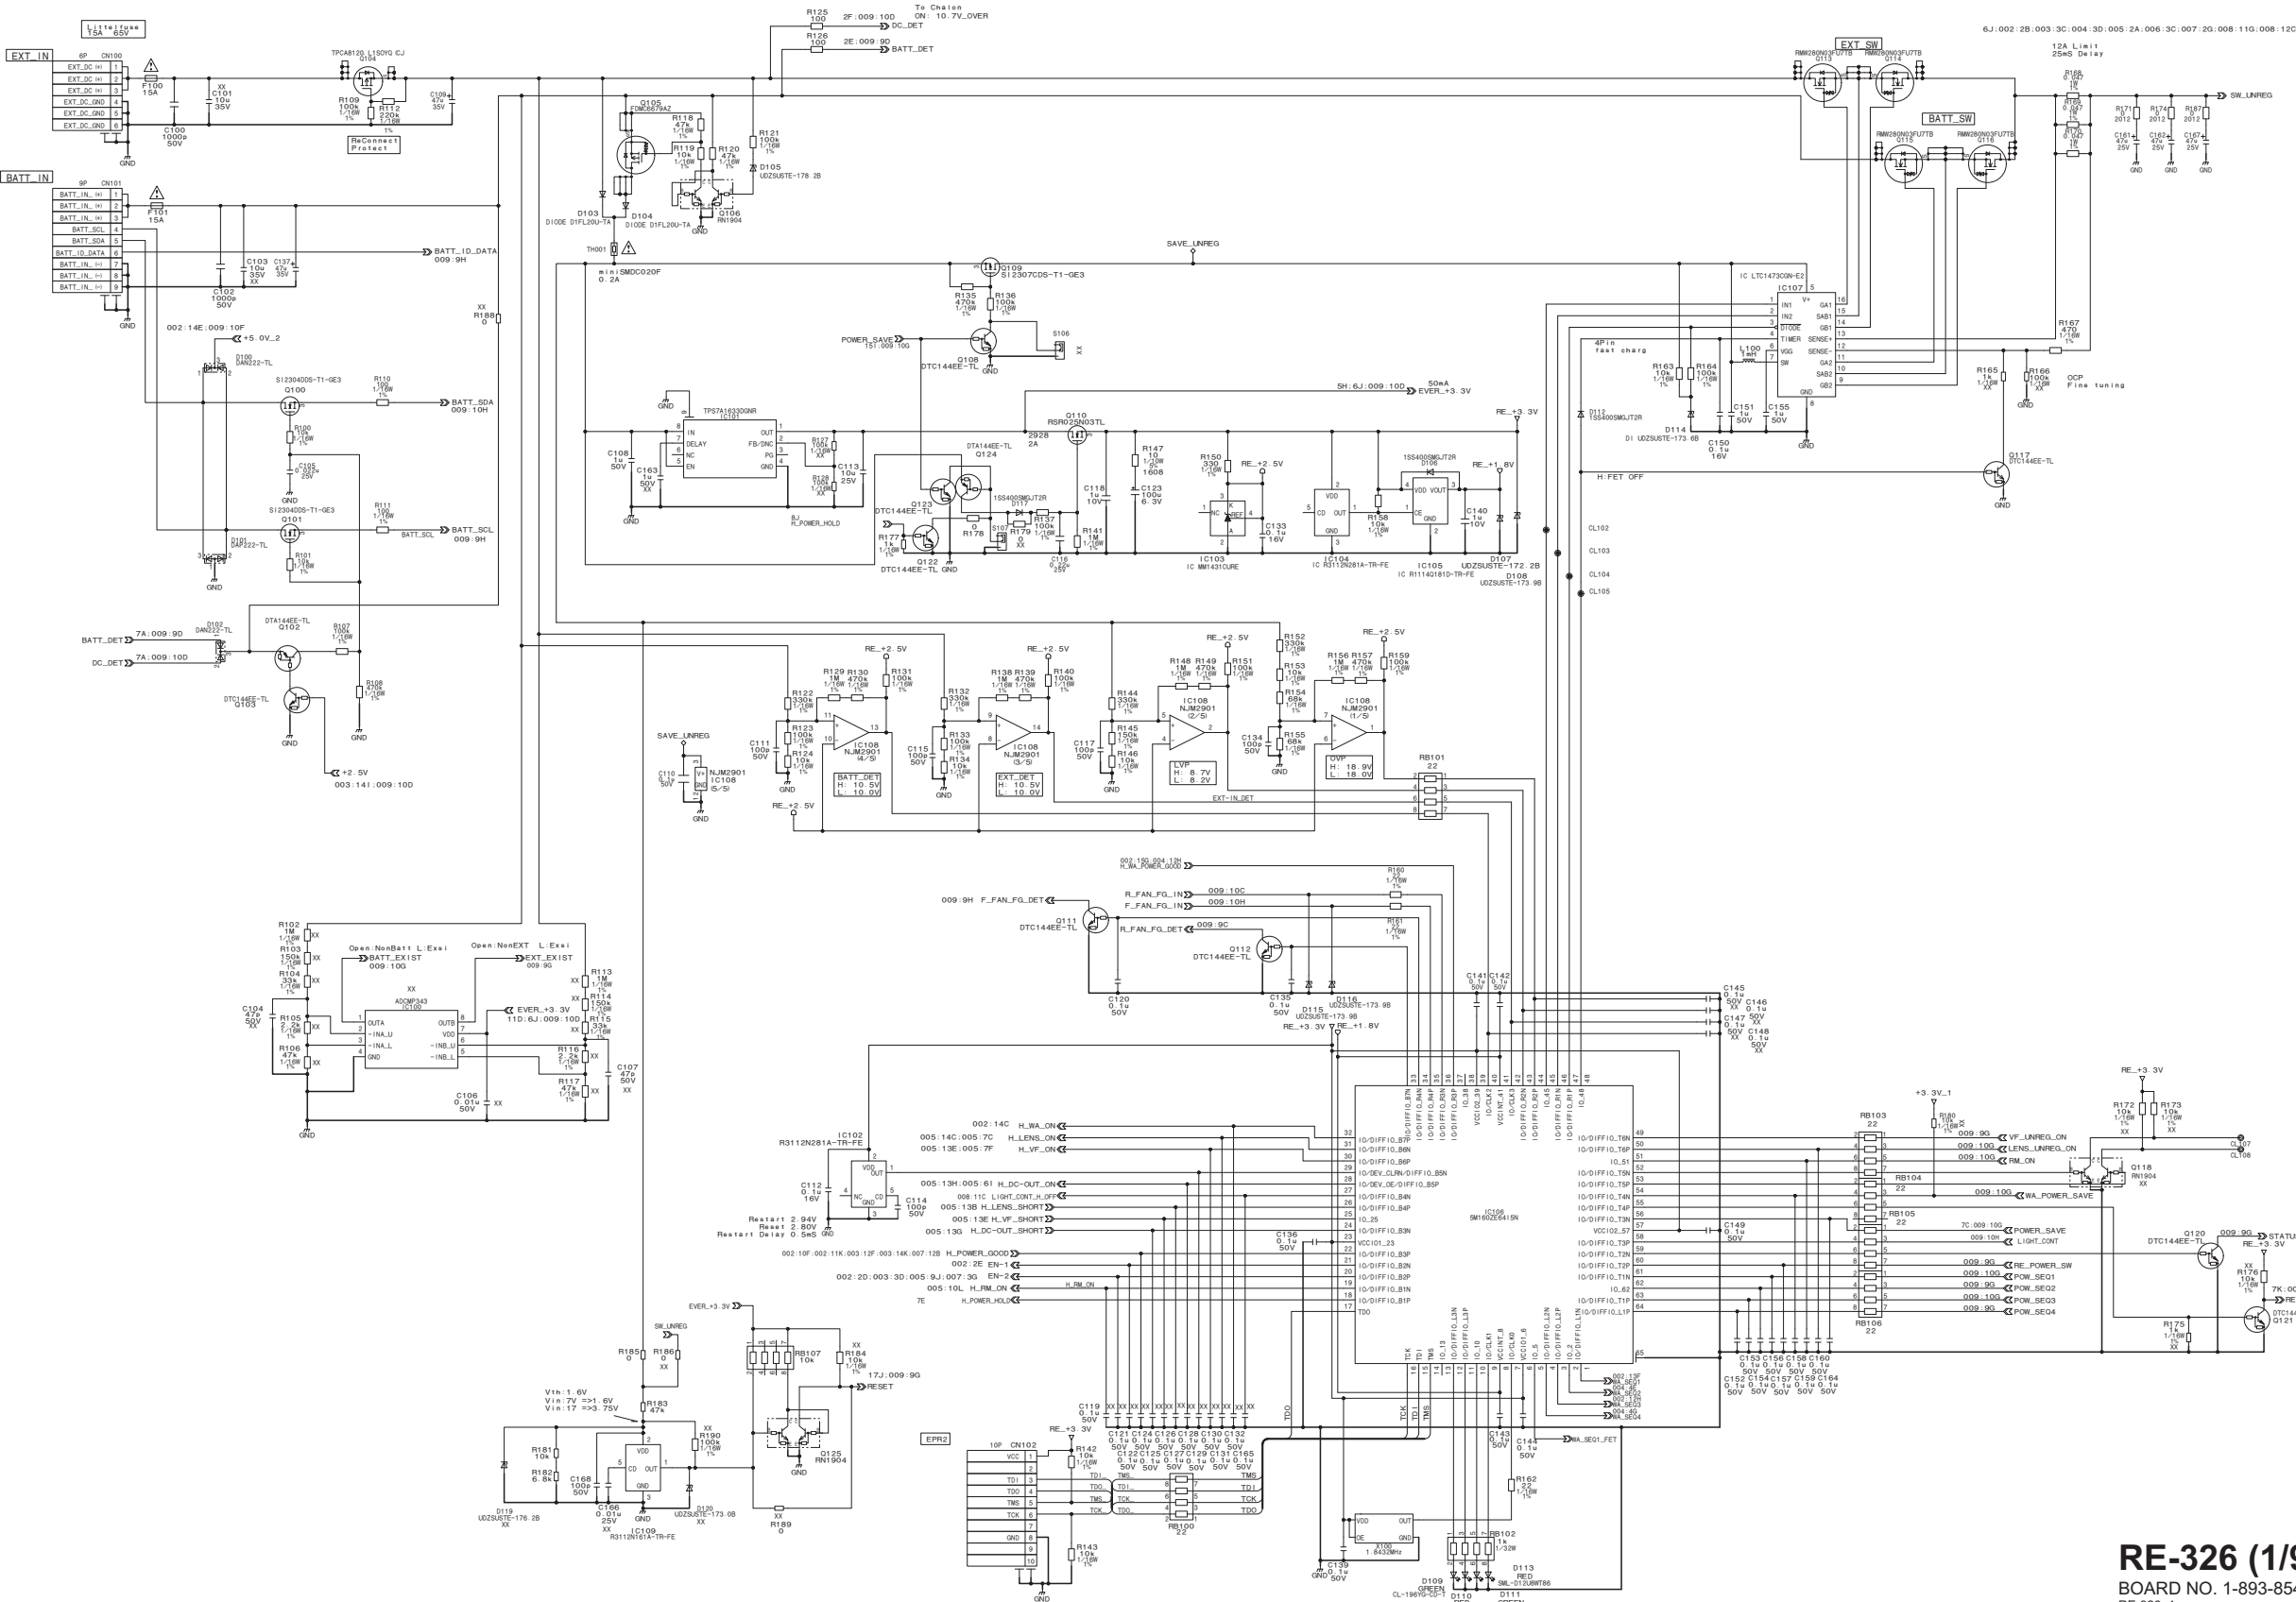

RE-326 (1/9)
BOARD NO. 1-893-854-12
RE-326_1



RE-326 (2/9)

001:16B;001:6J;003:3C;004:3D;005:2A;006:3C;007:2G;008:11G;008:12C

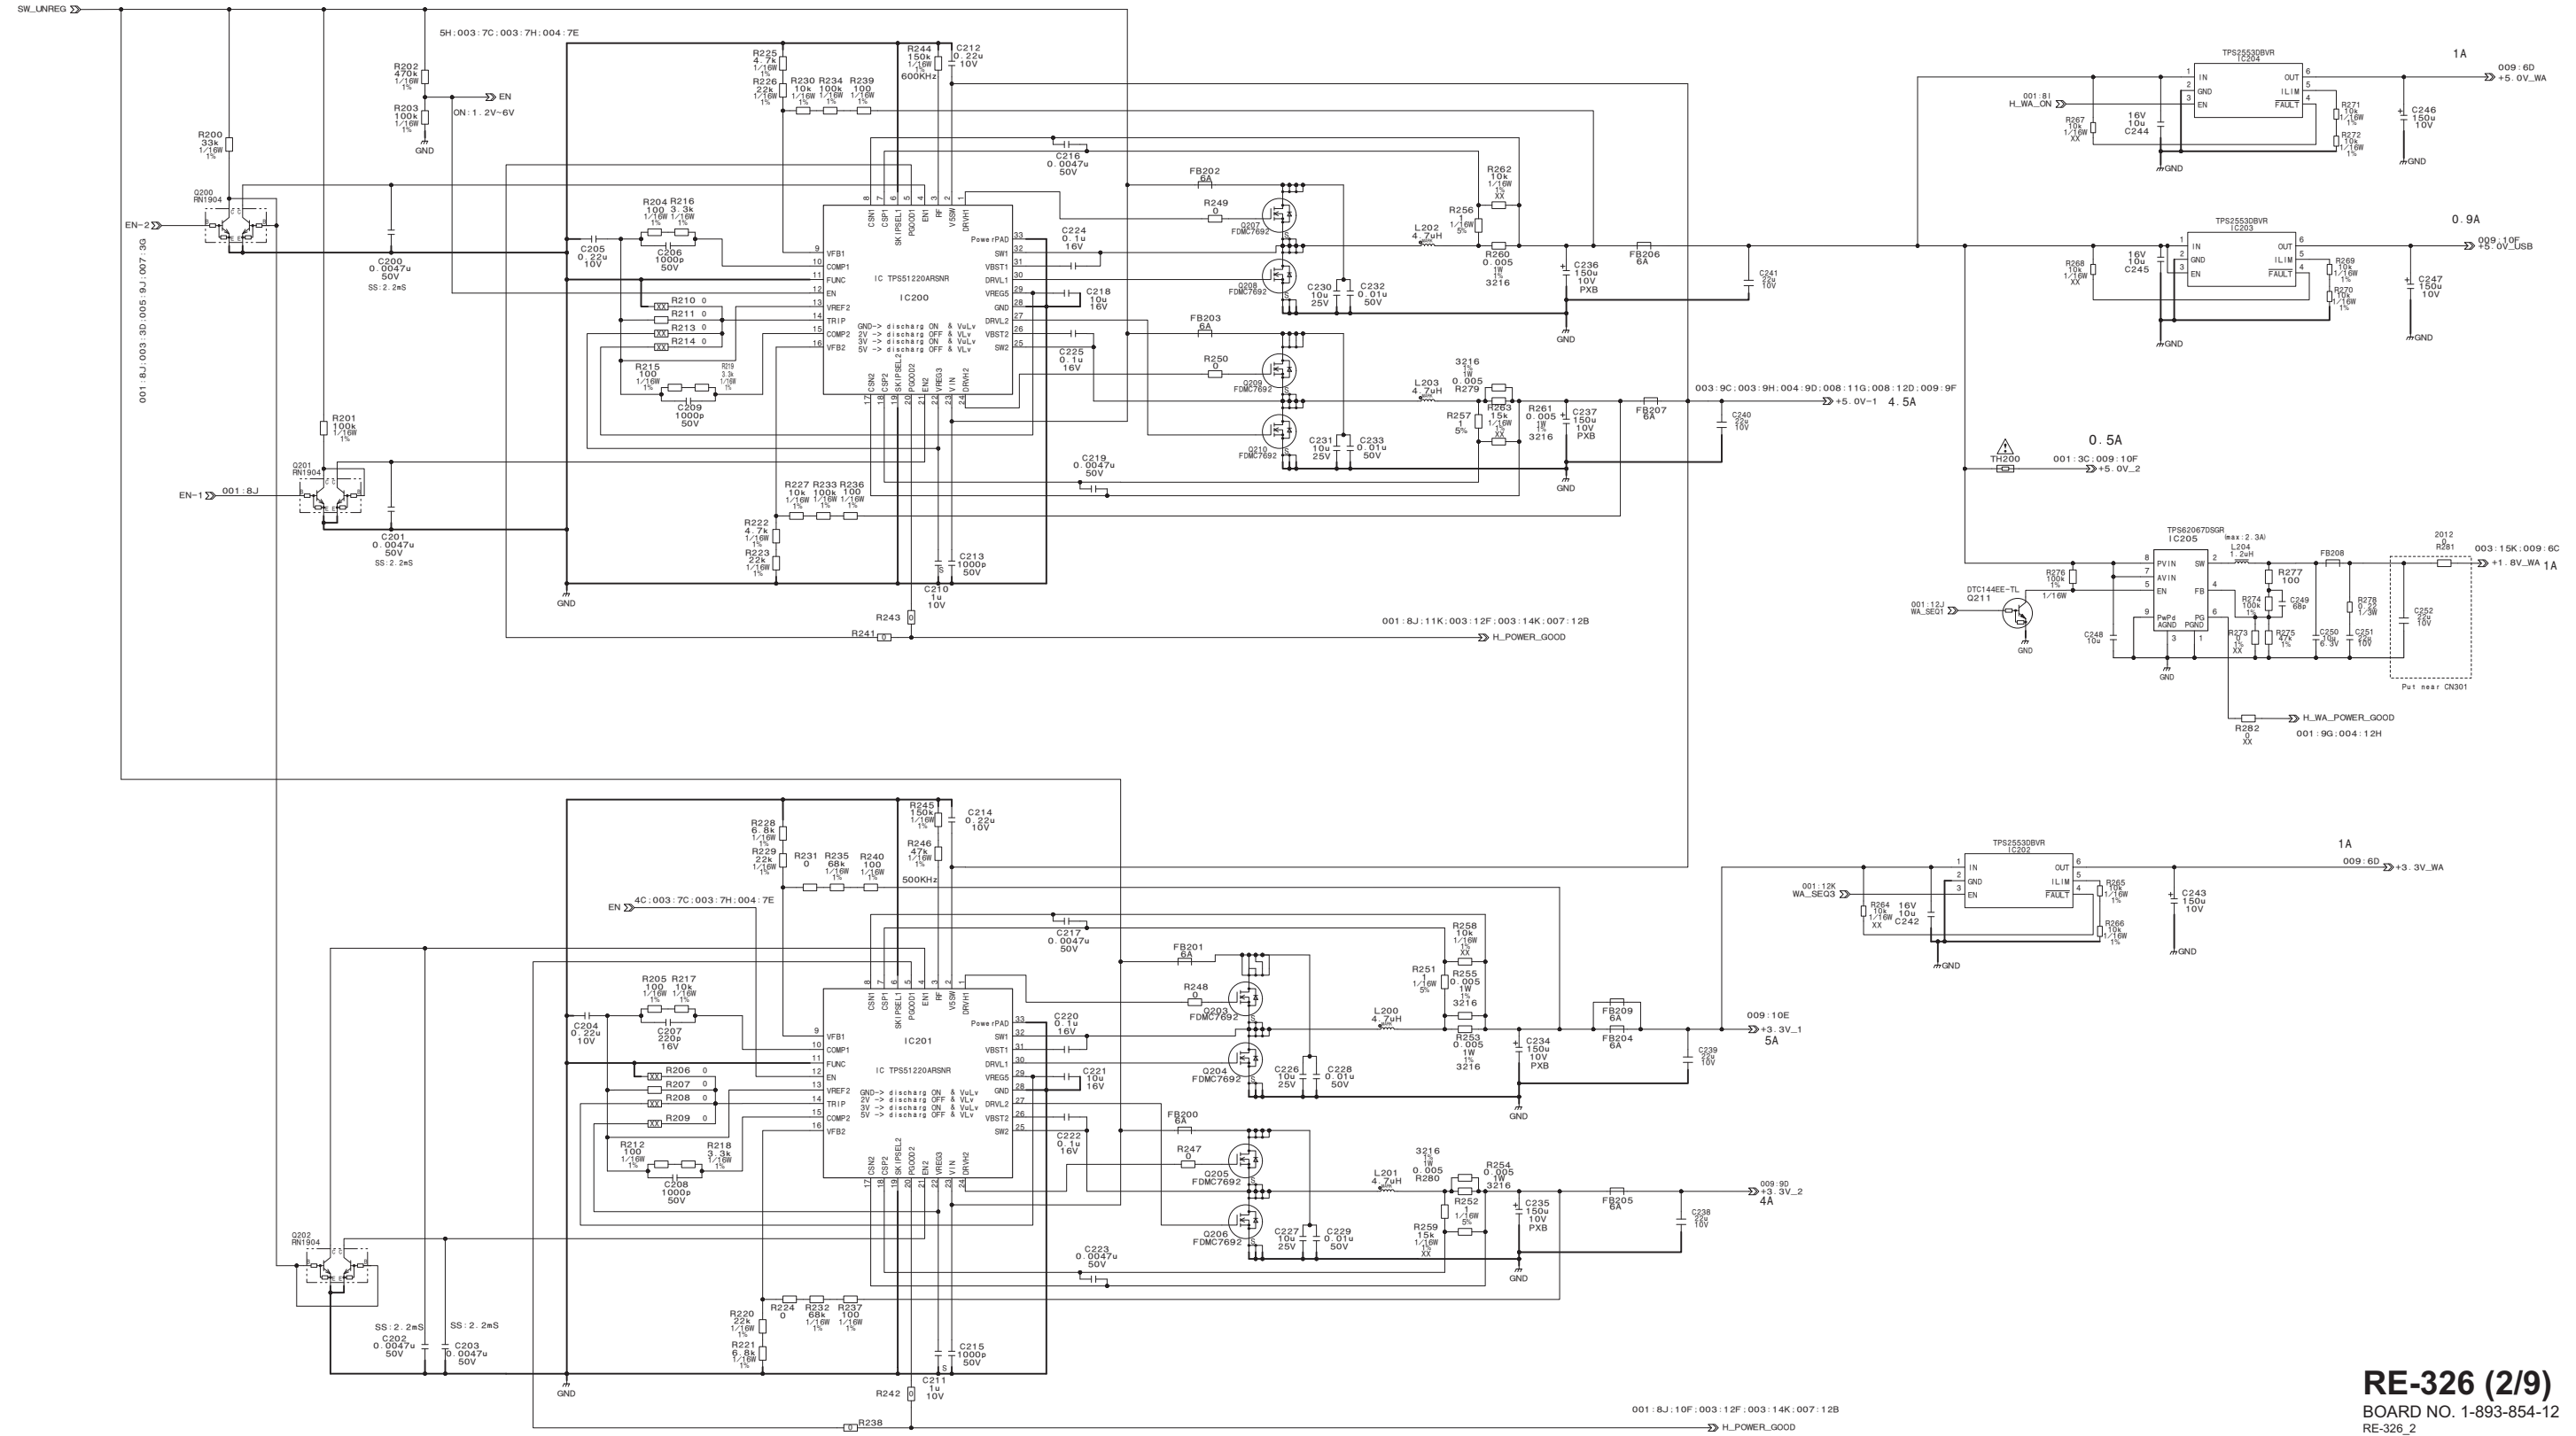


RE-326 (2/9)
BOARD NO. 1-893-854-12
RE-326_2


RE-326 (3/9)

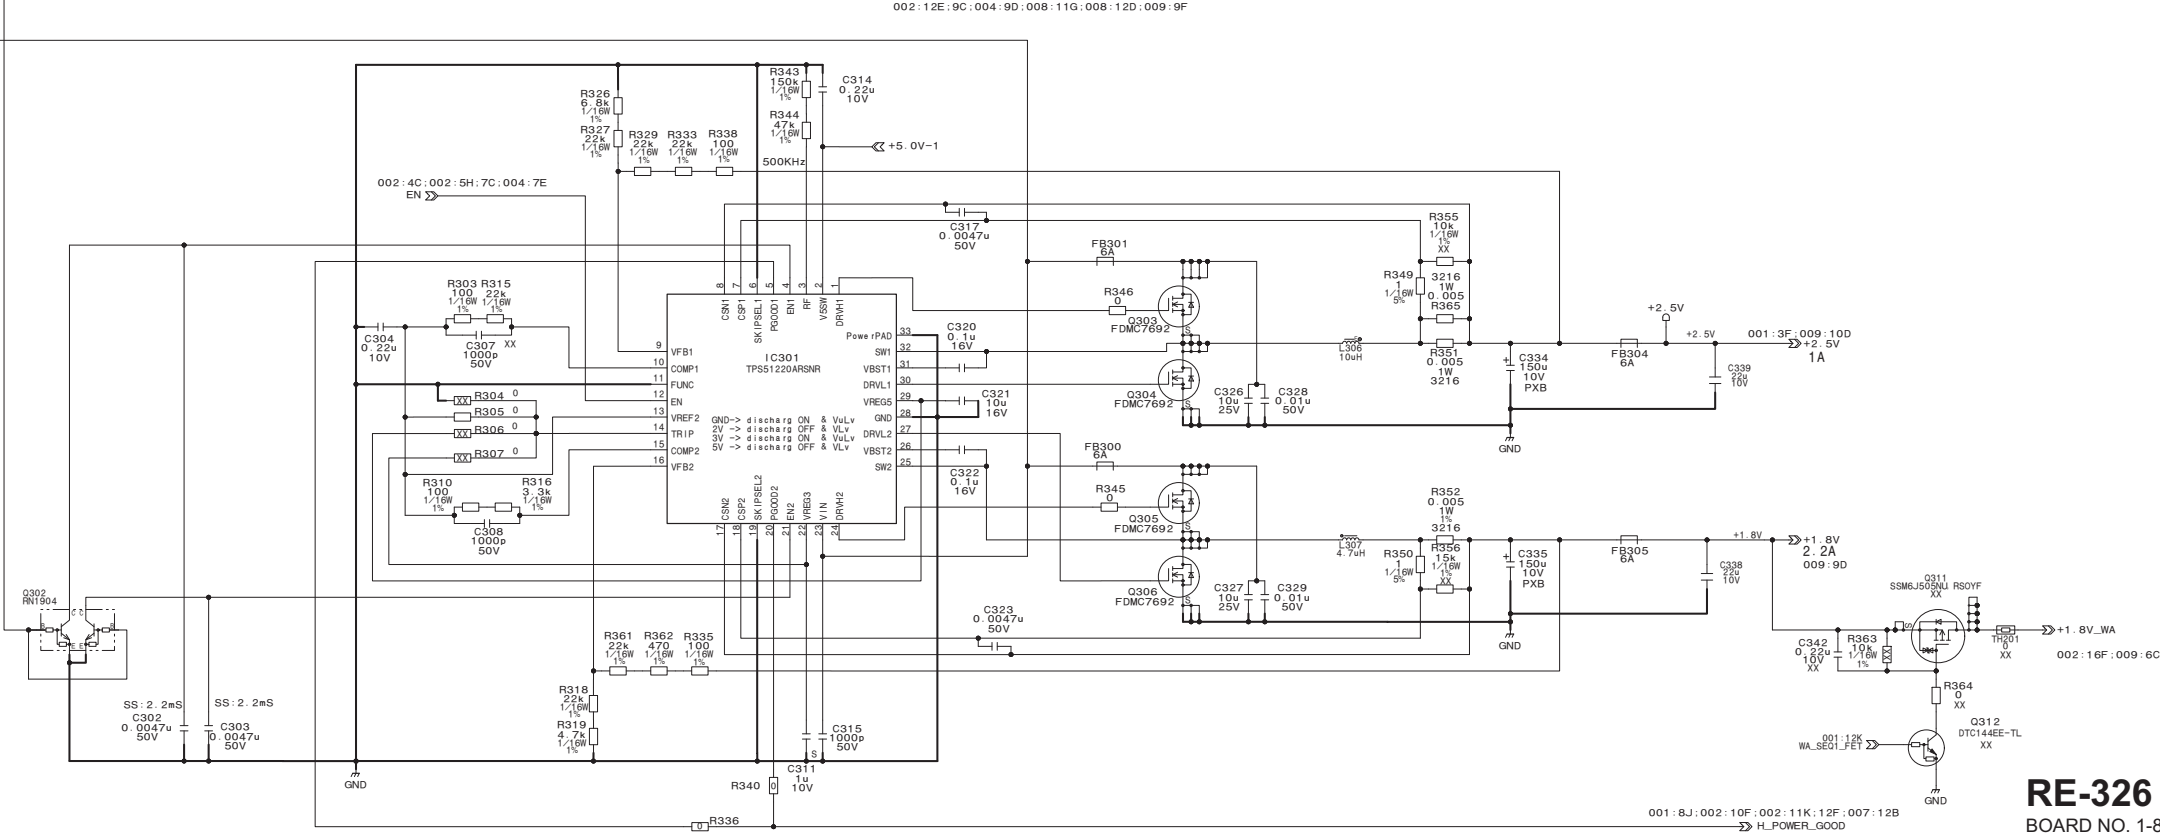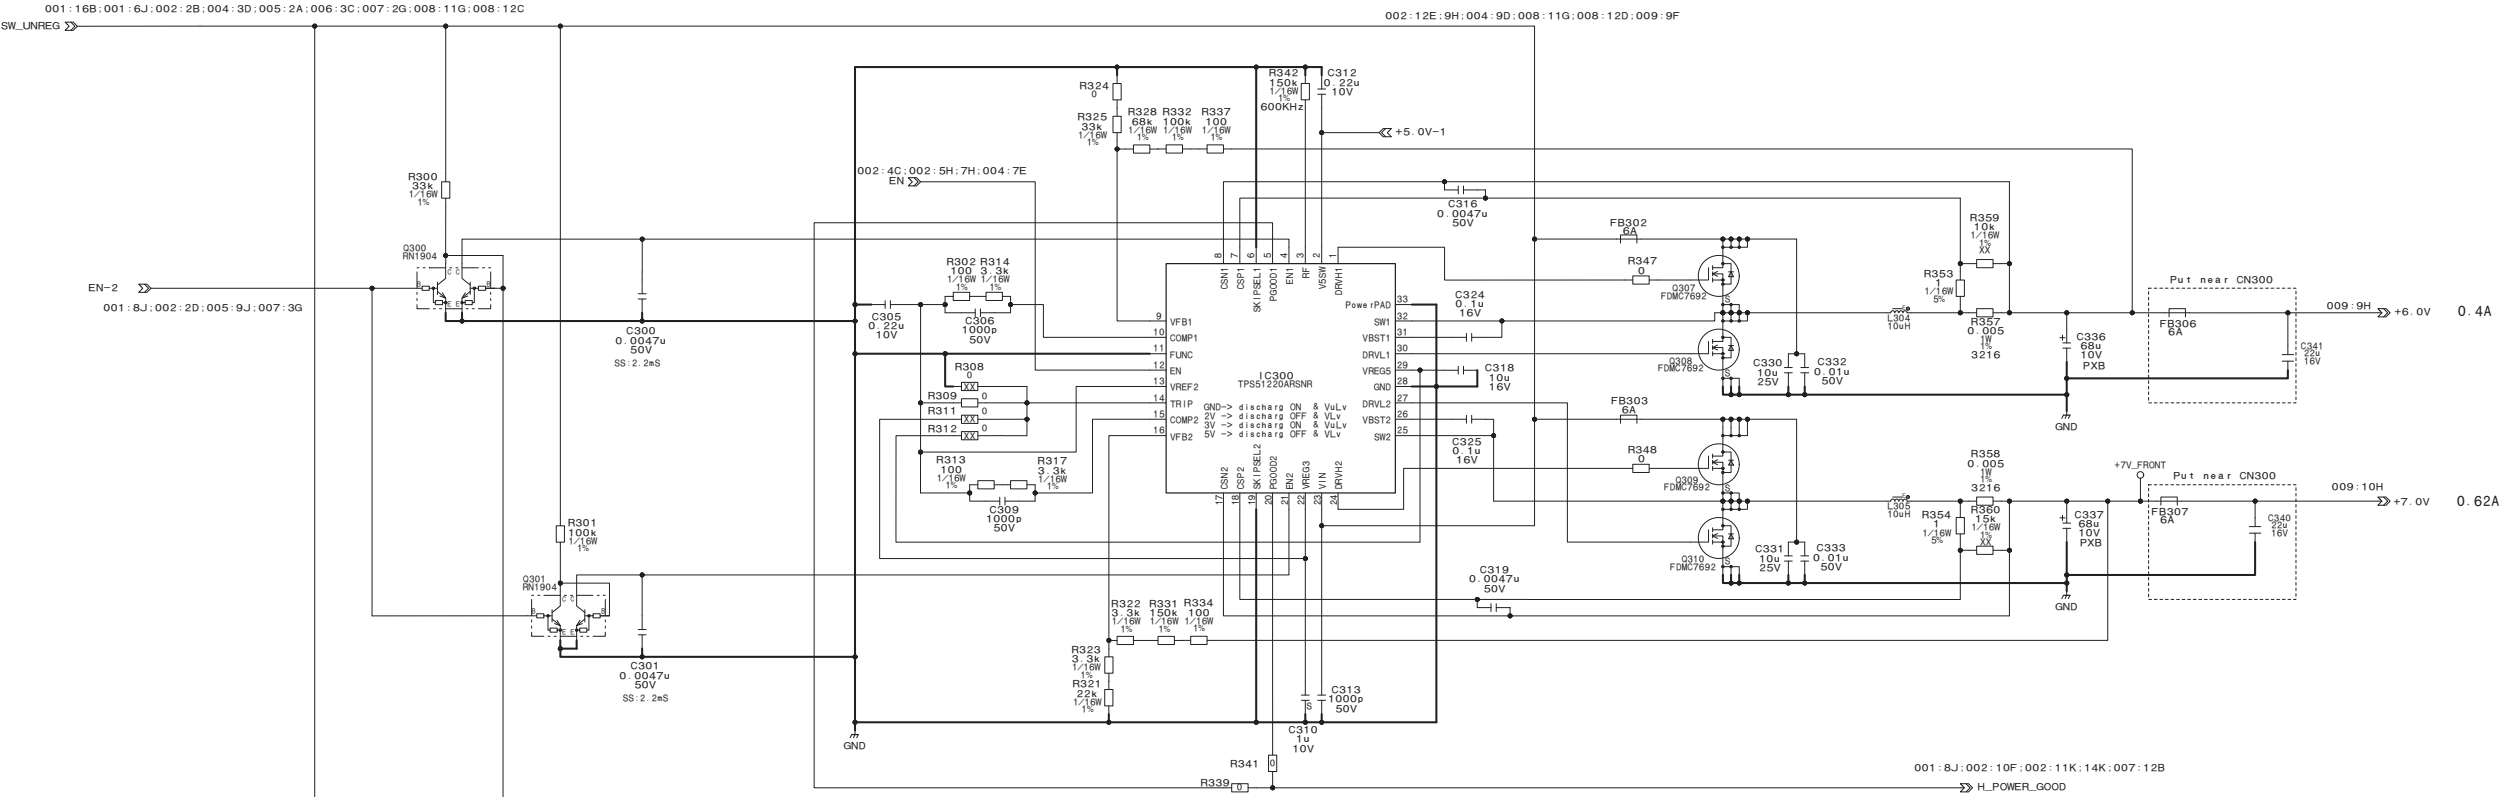

RE-326 (3/9)
BOARD NO. 1-893-854-12
RE-326_3

RE-326 (4/9)




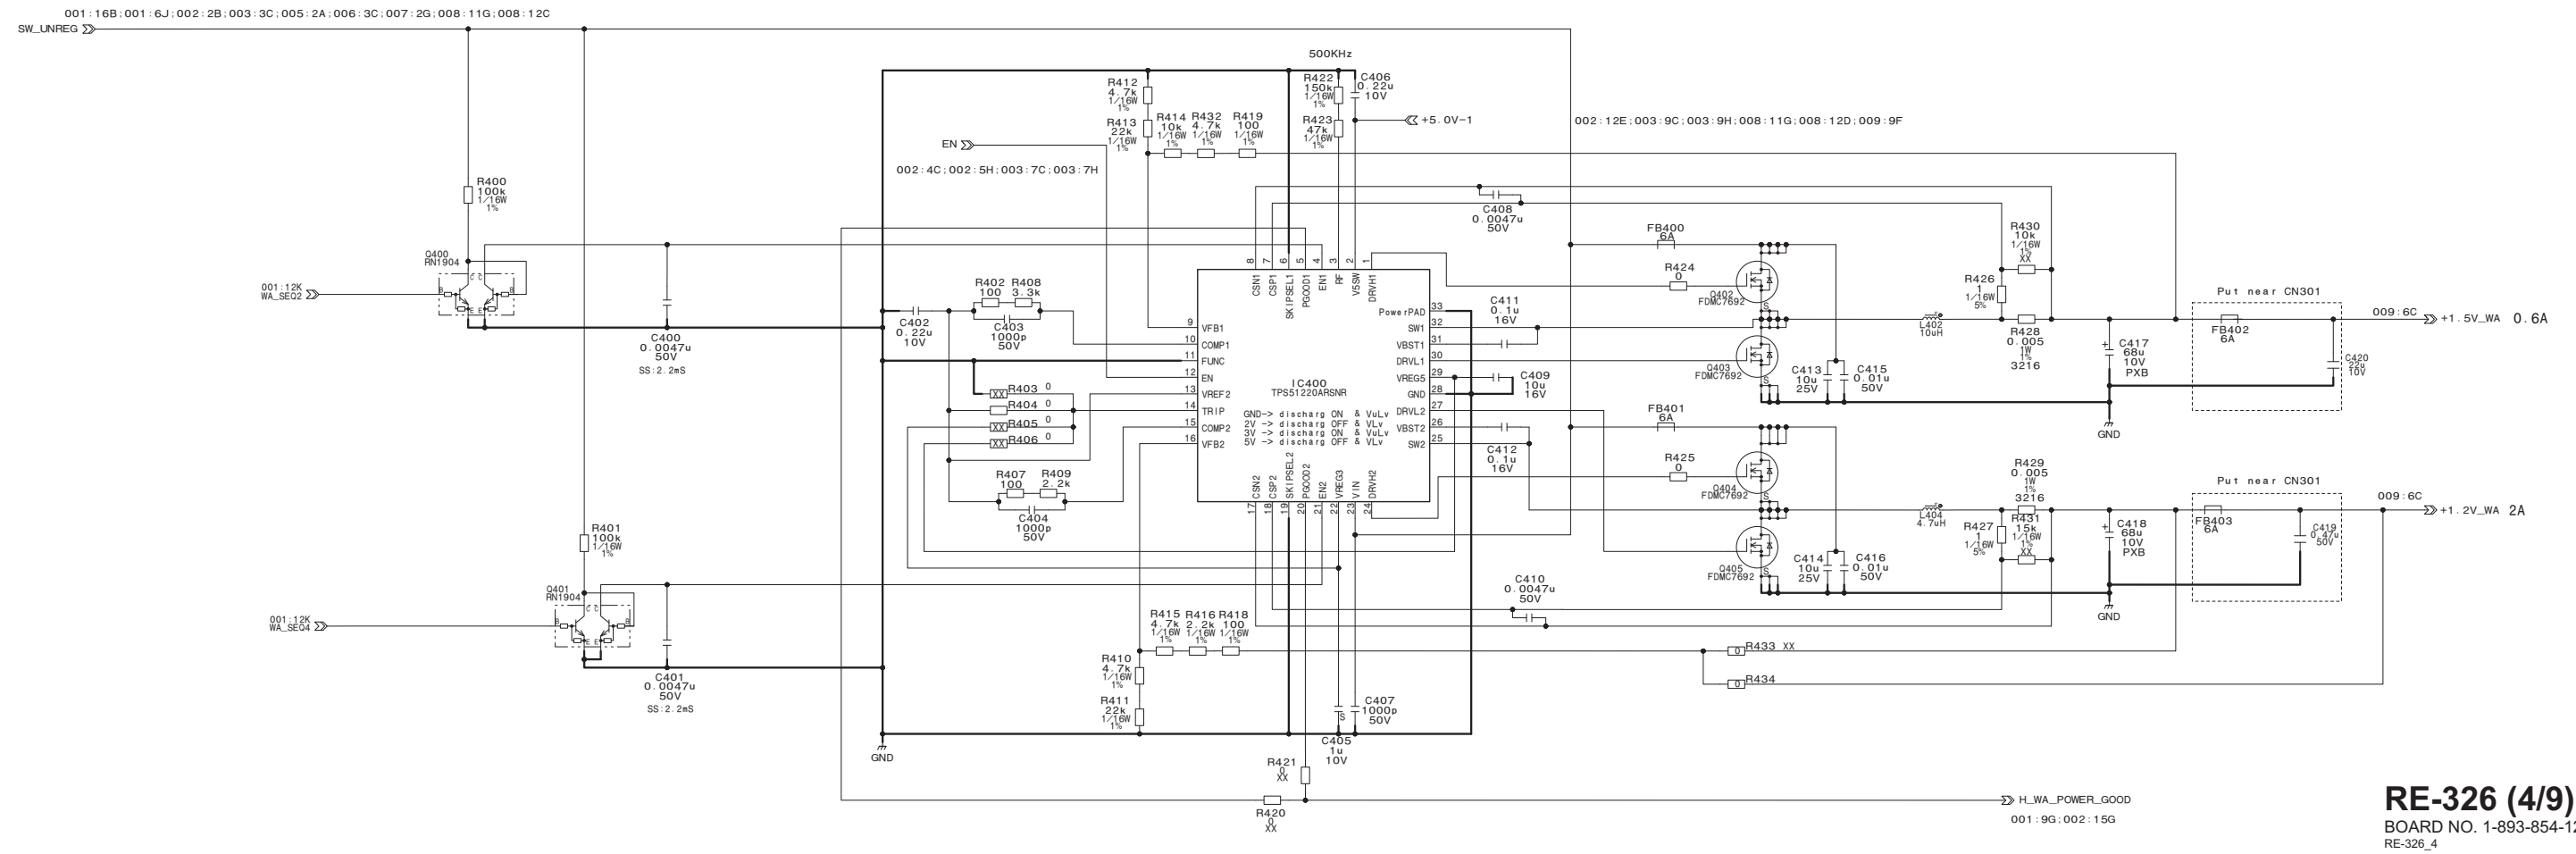


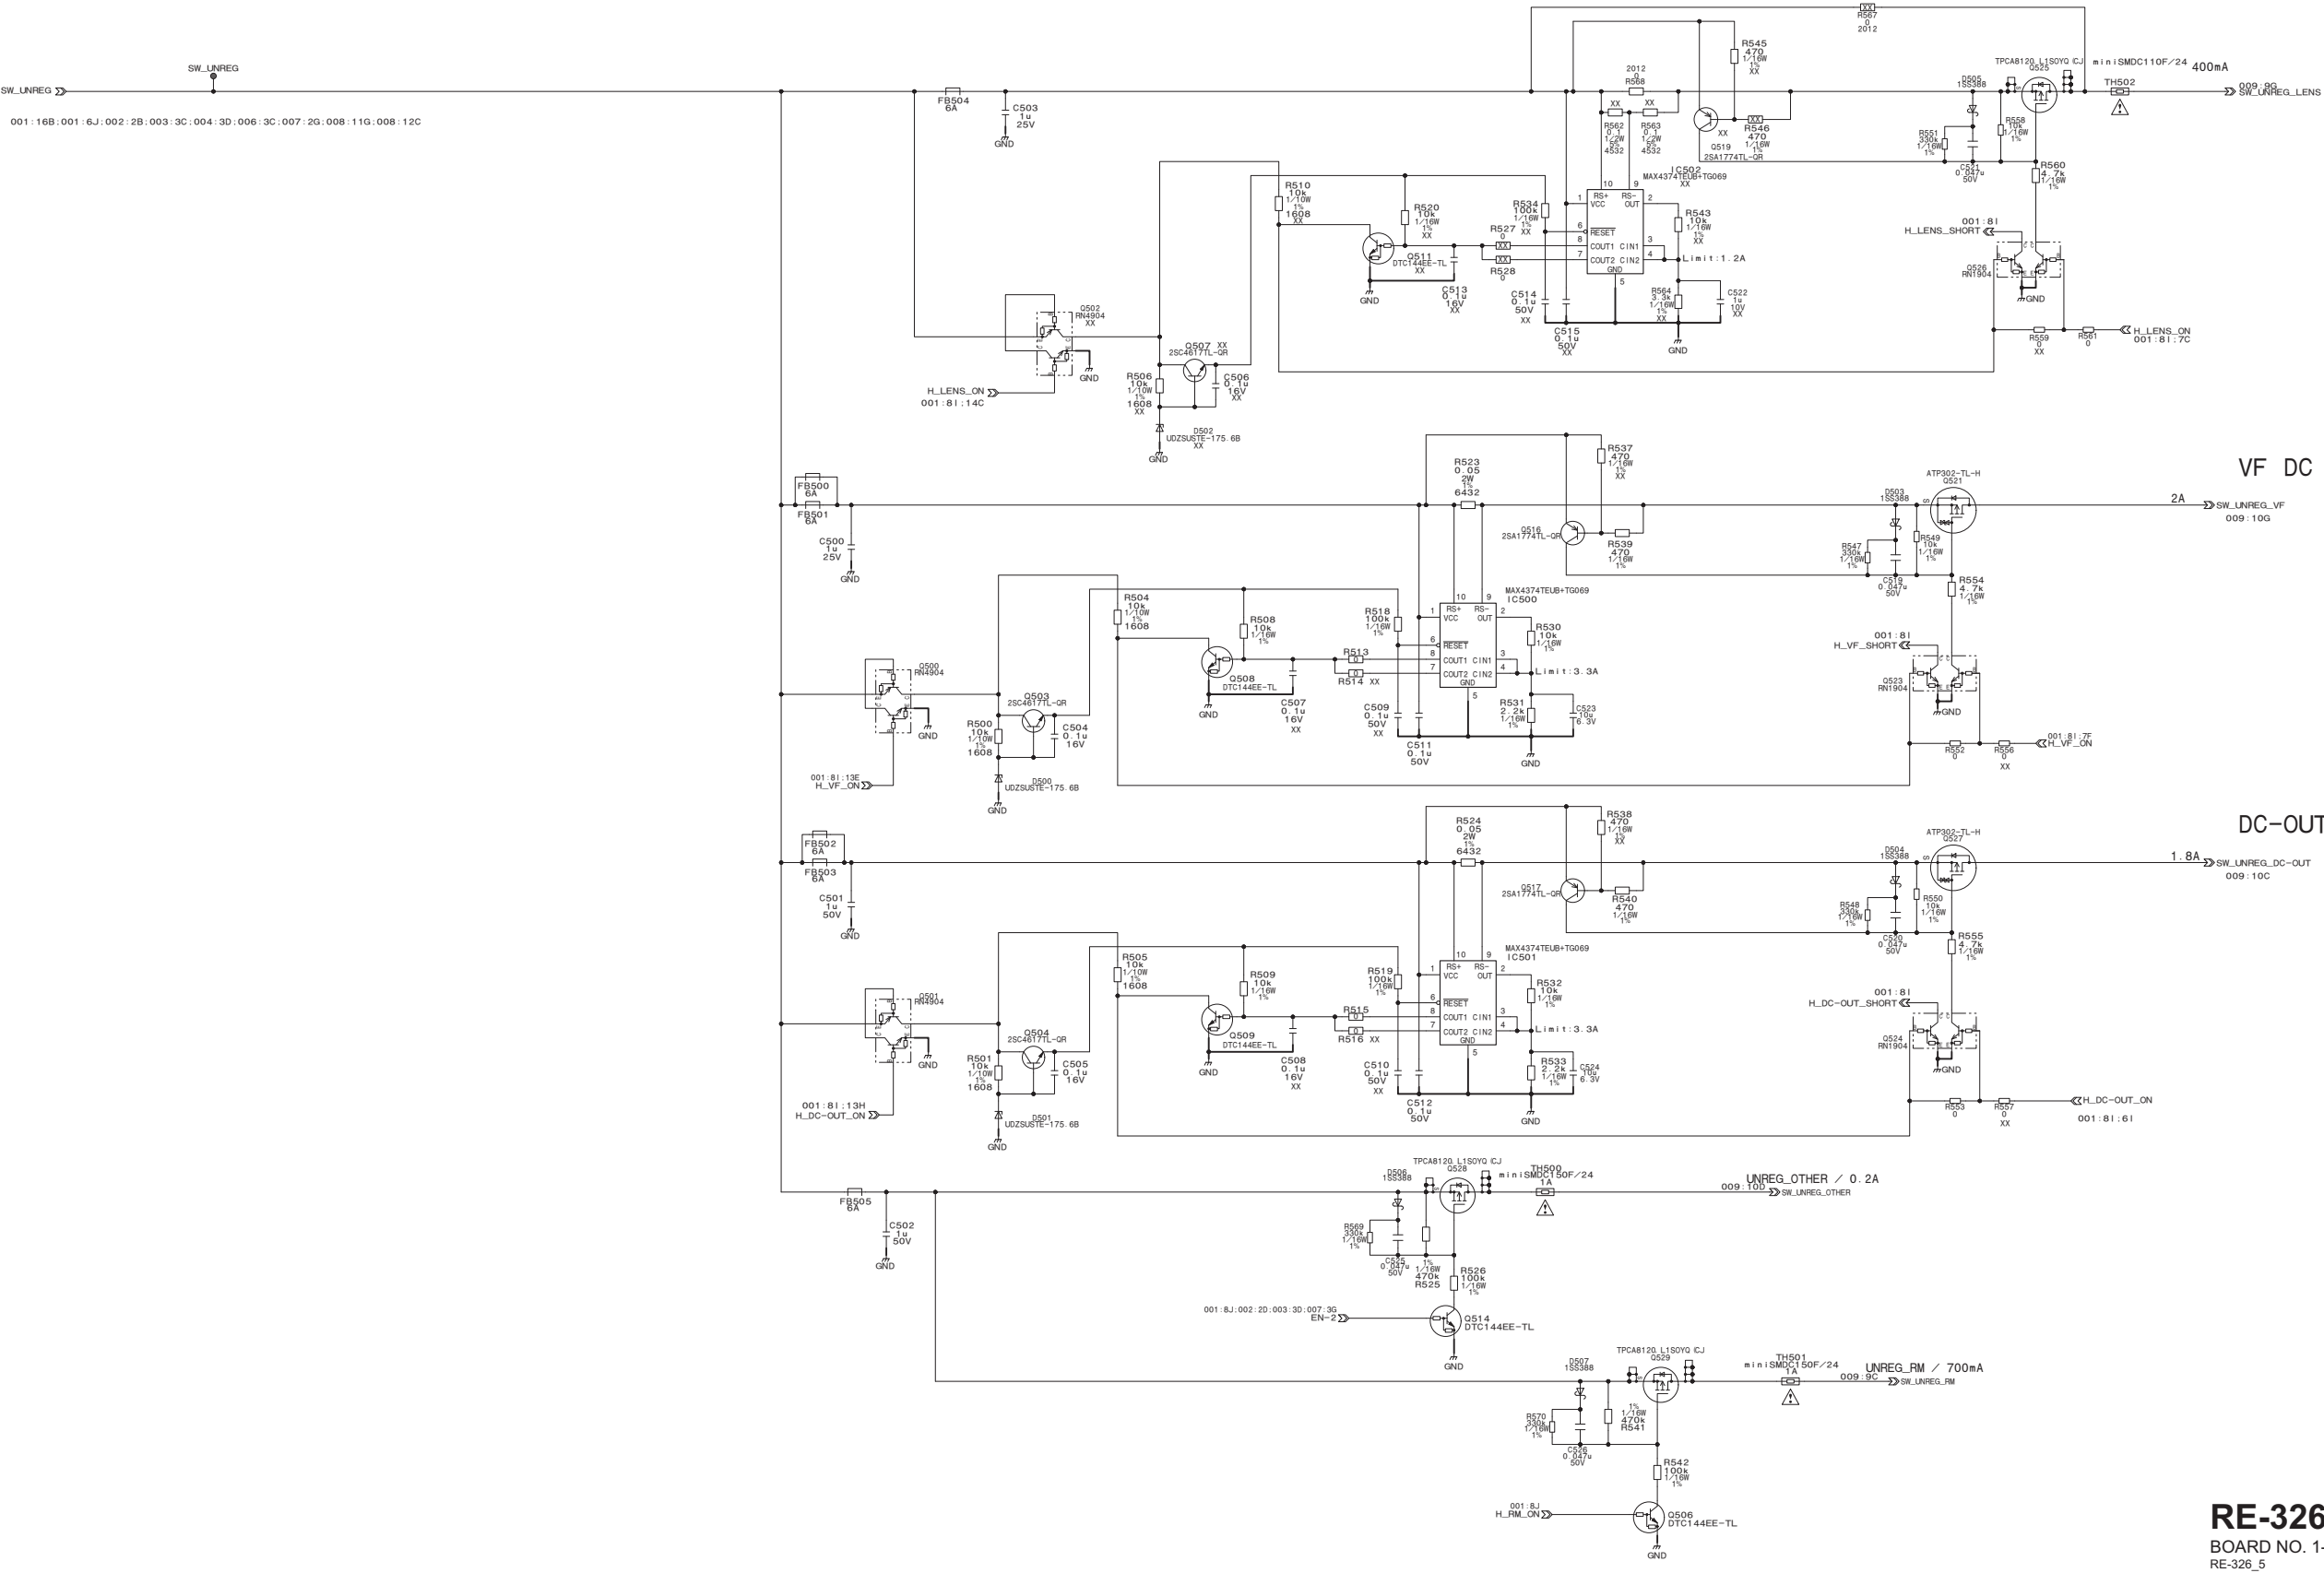

RE-326 (5/9)
BOARD NO. 1-893-854-12
RE-326_5


RE-326 (6/9)

001:16B;001:6J;002:2B;003:3C;004:3D;005:2A;007:2G;008:11G;008:12C

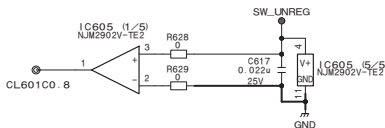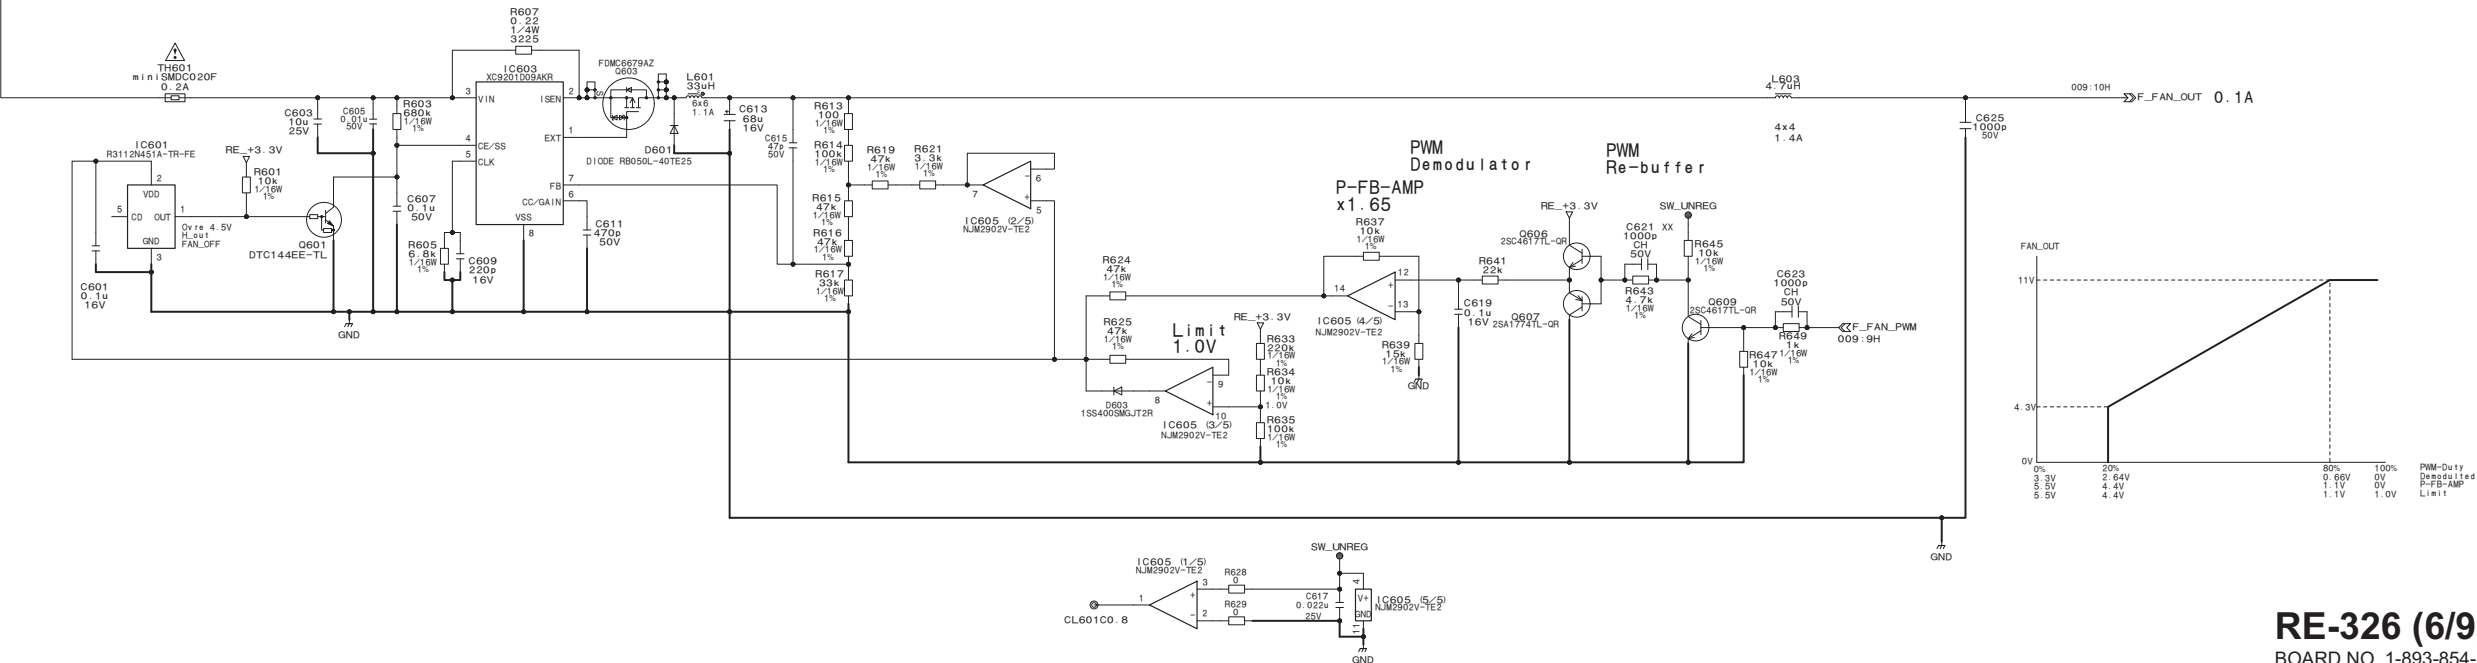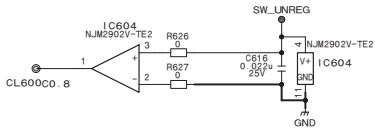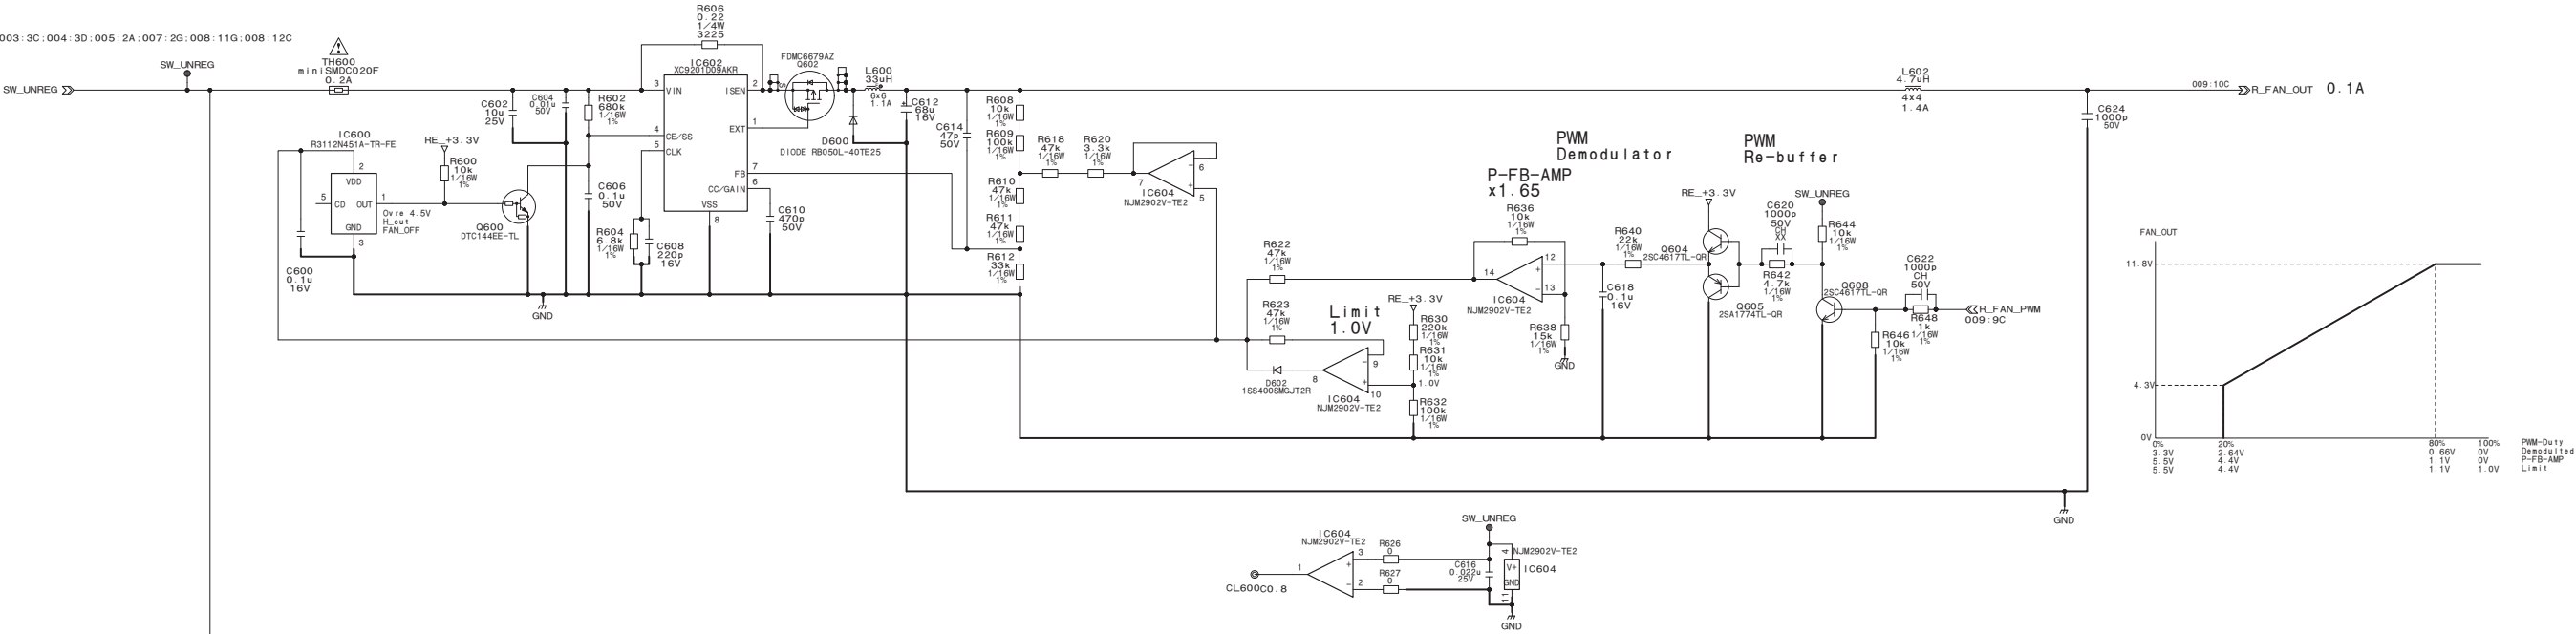


RE-326 (6/9)
BOARD NO. 1-893-854-12
RE-326_6

RE-326 (7/9)



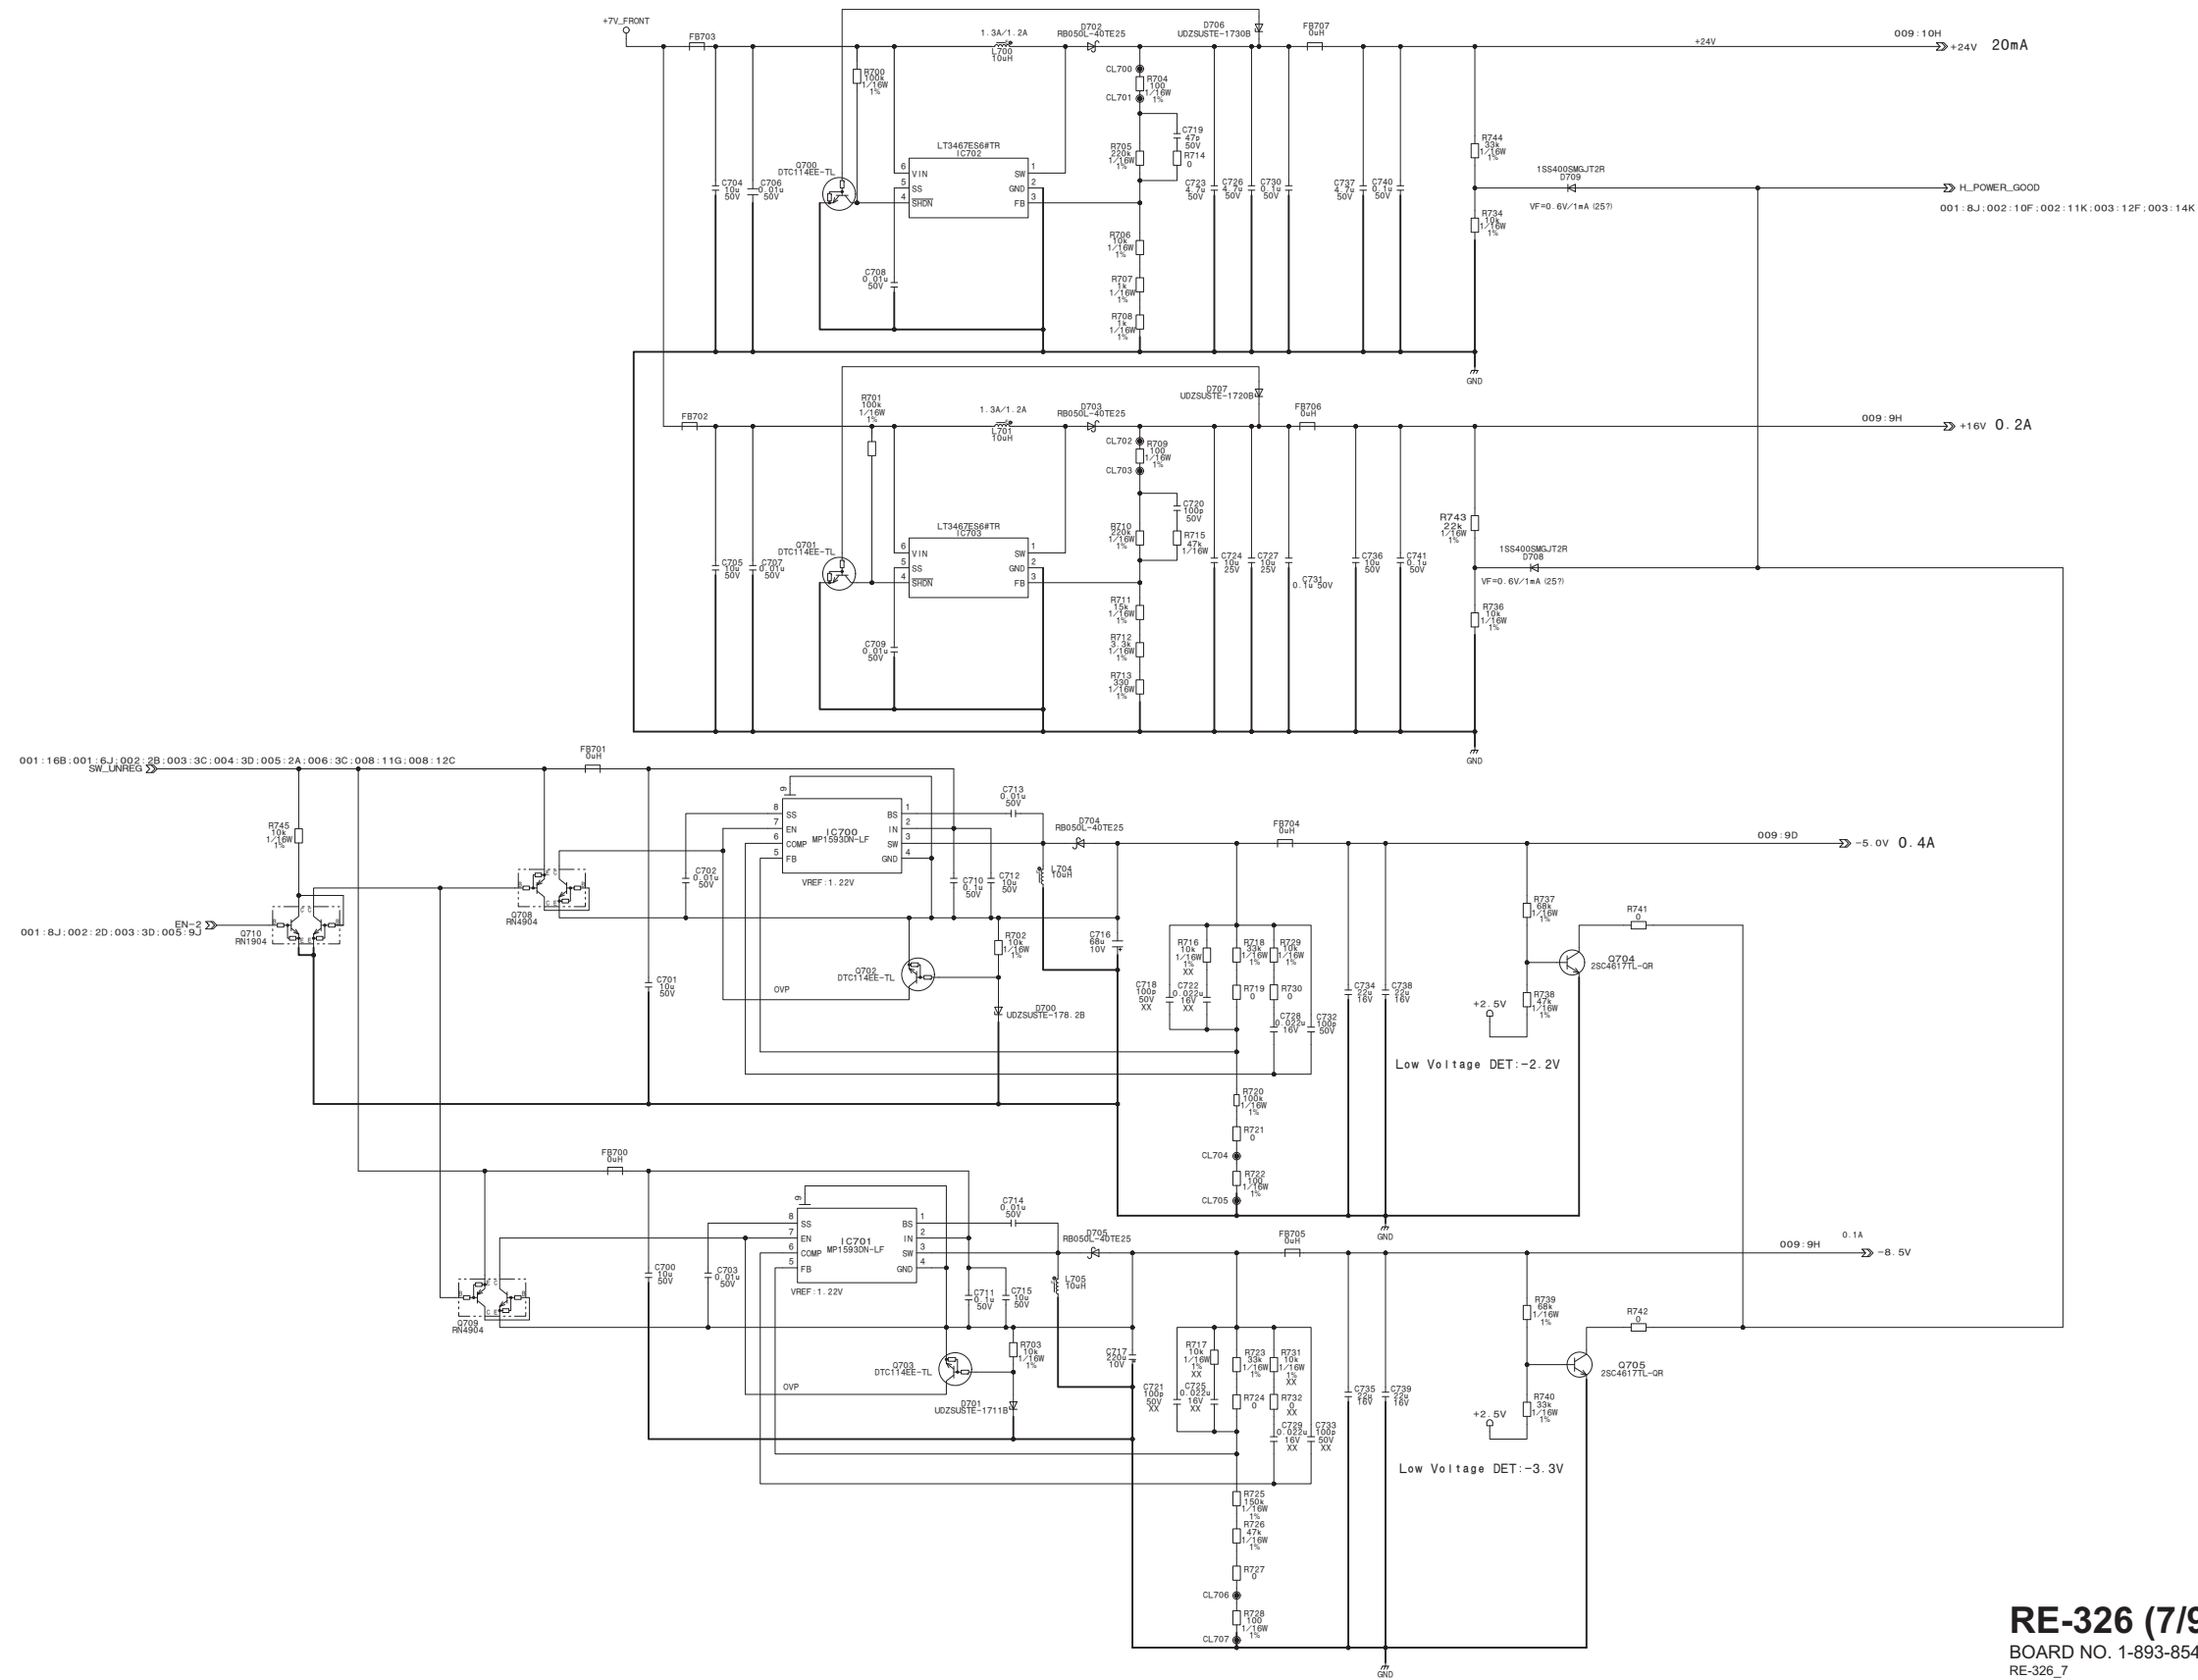


RE-326 (7/9)
BOARD NO. 1-893-854-12
RE-326_7

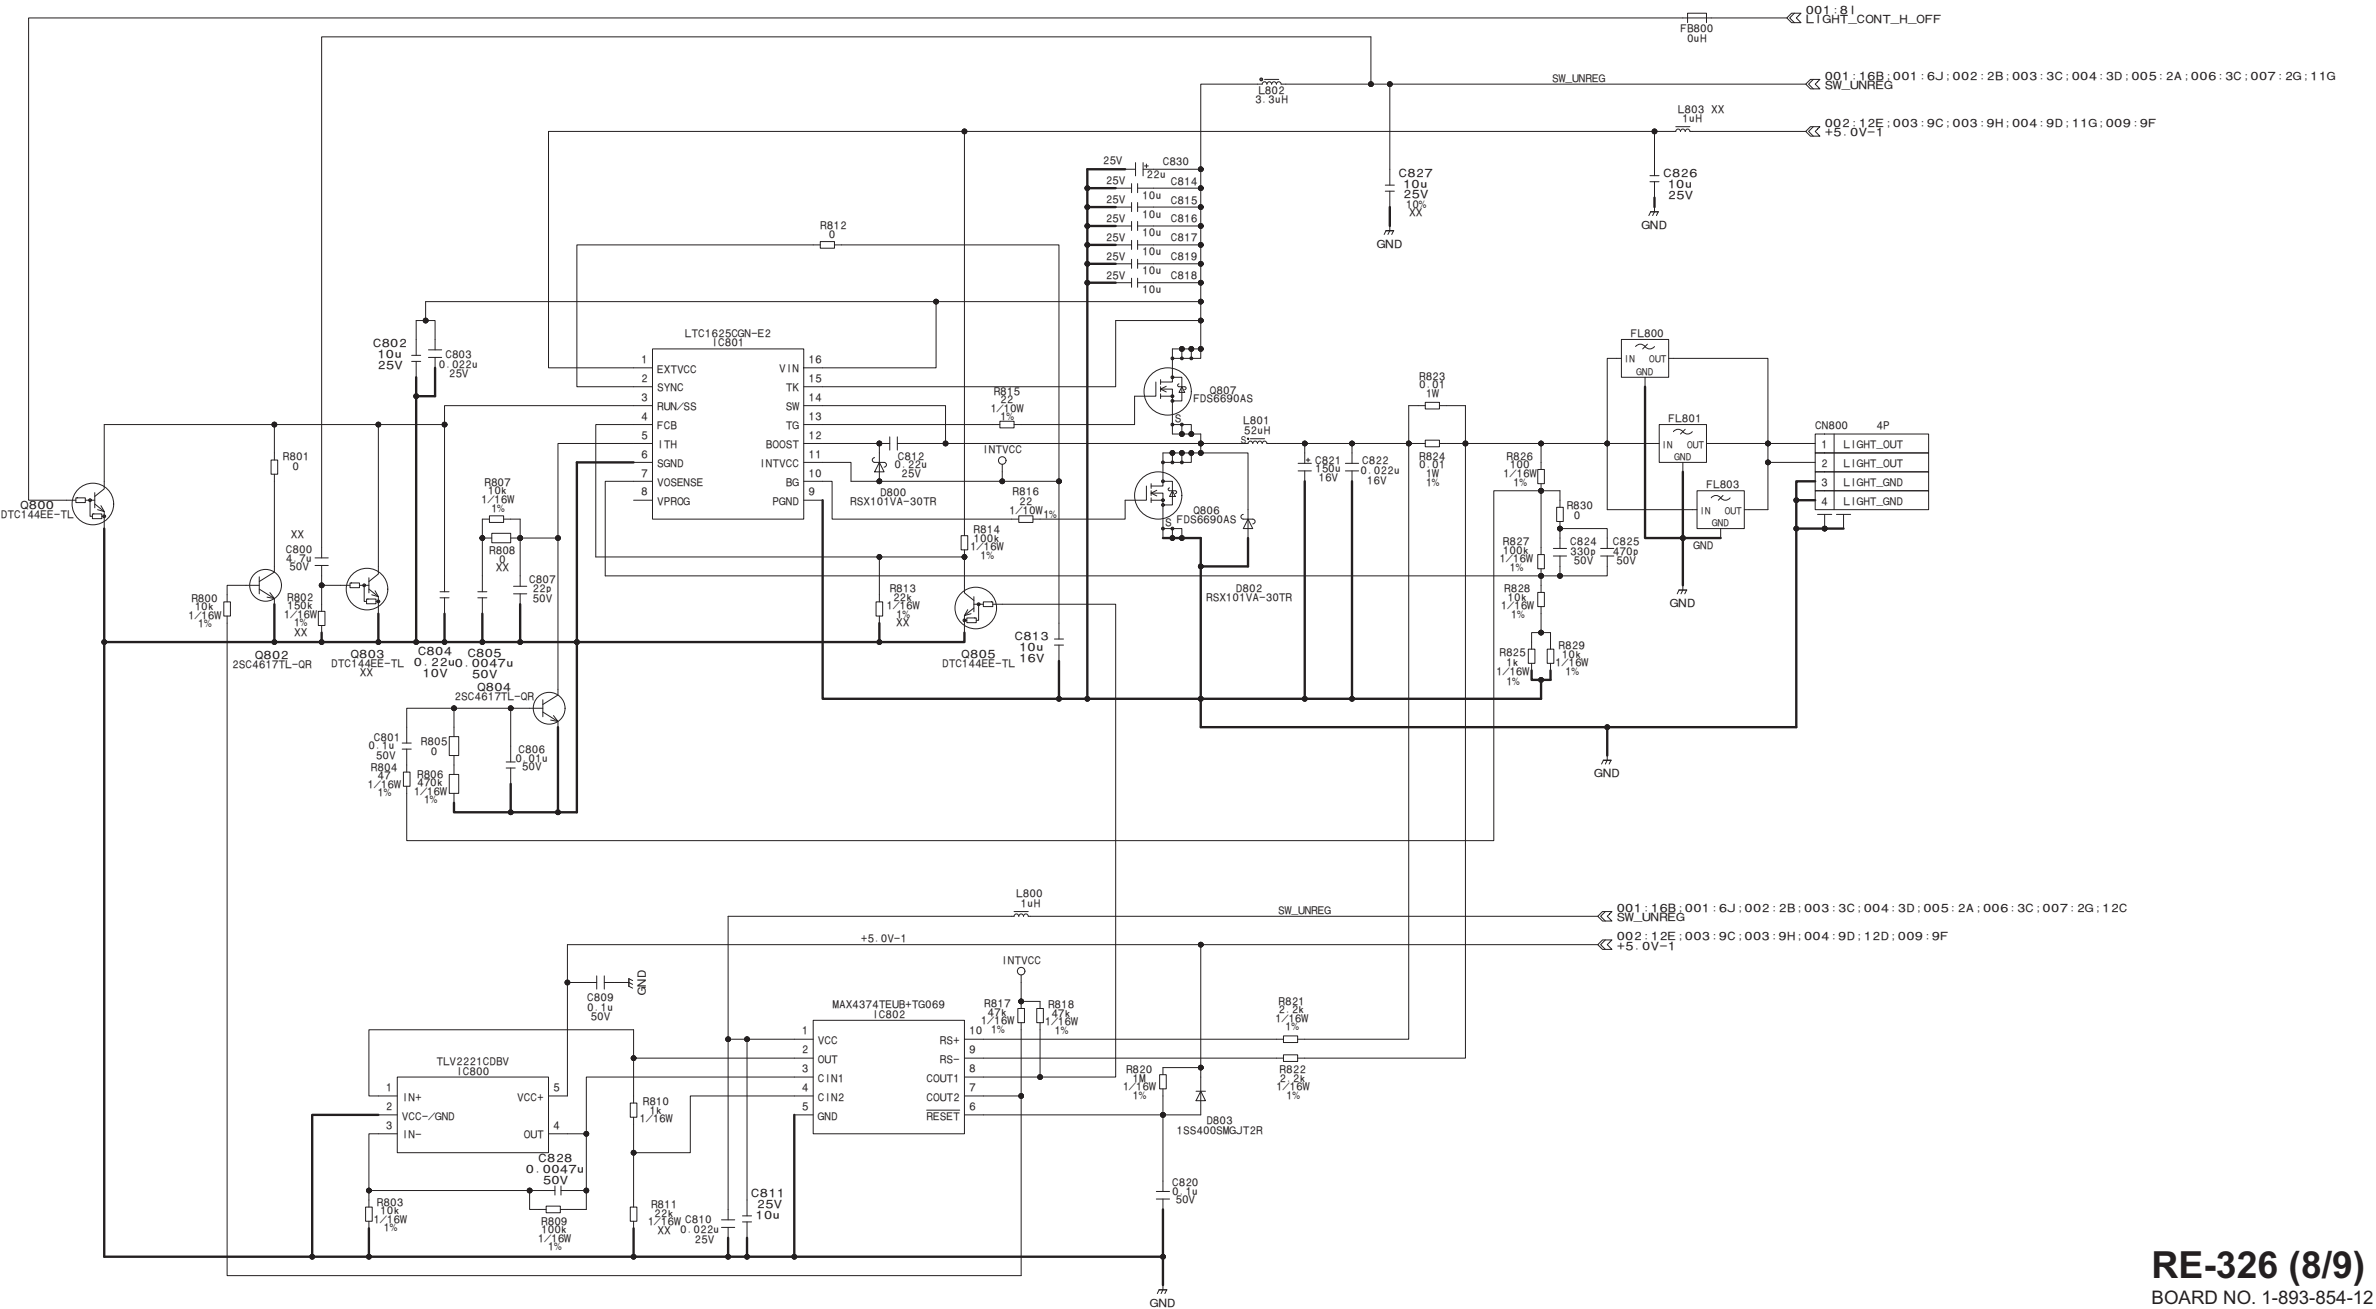

RE-326 (8/9)
BOARD NO. 1-893-854-12
RE-326_8


RE-326 (9/9)

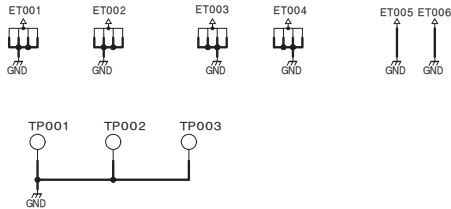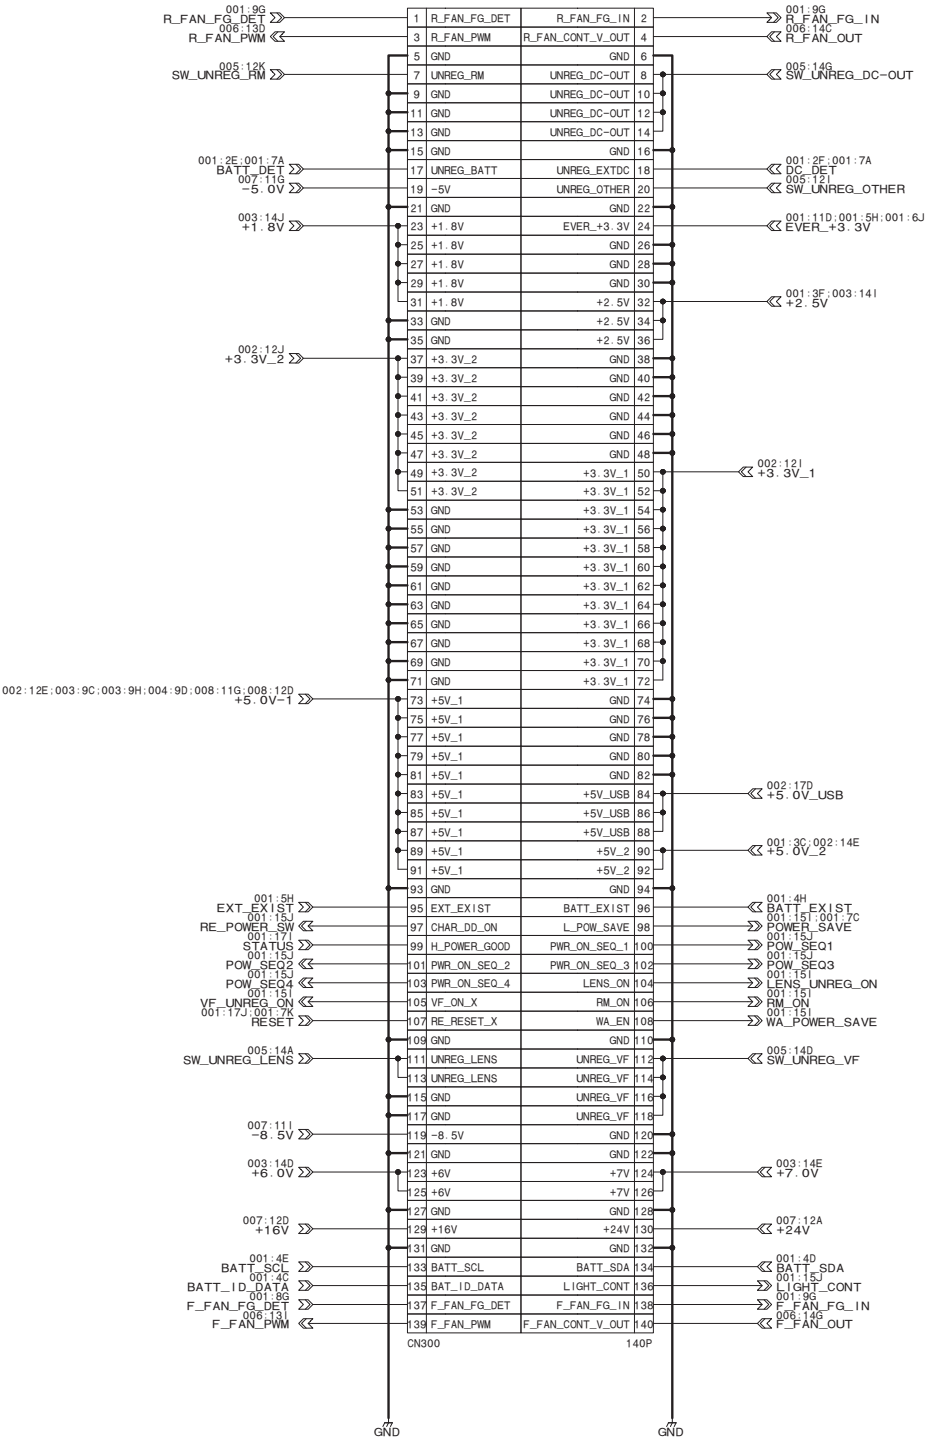


RE-326 (9/9)
BOARD NO. 1-893-854-12
RE-326_9

RM-246

To MB

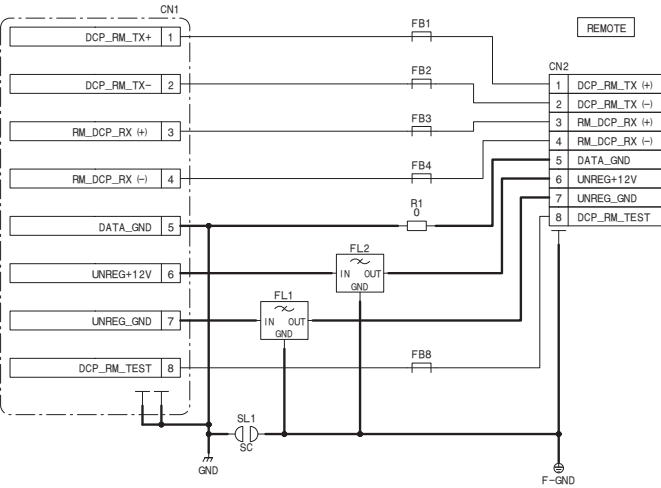


RM-246
BOARD NO. 1-893-856-11
RM-246_1

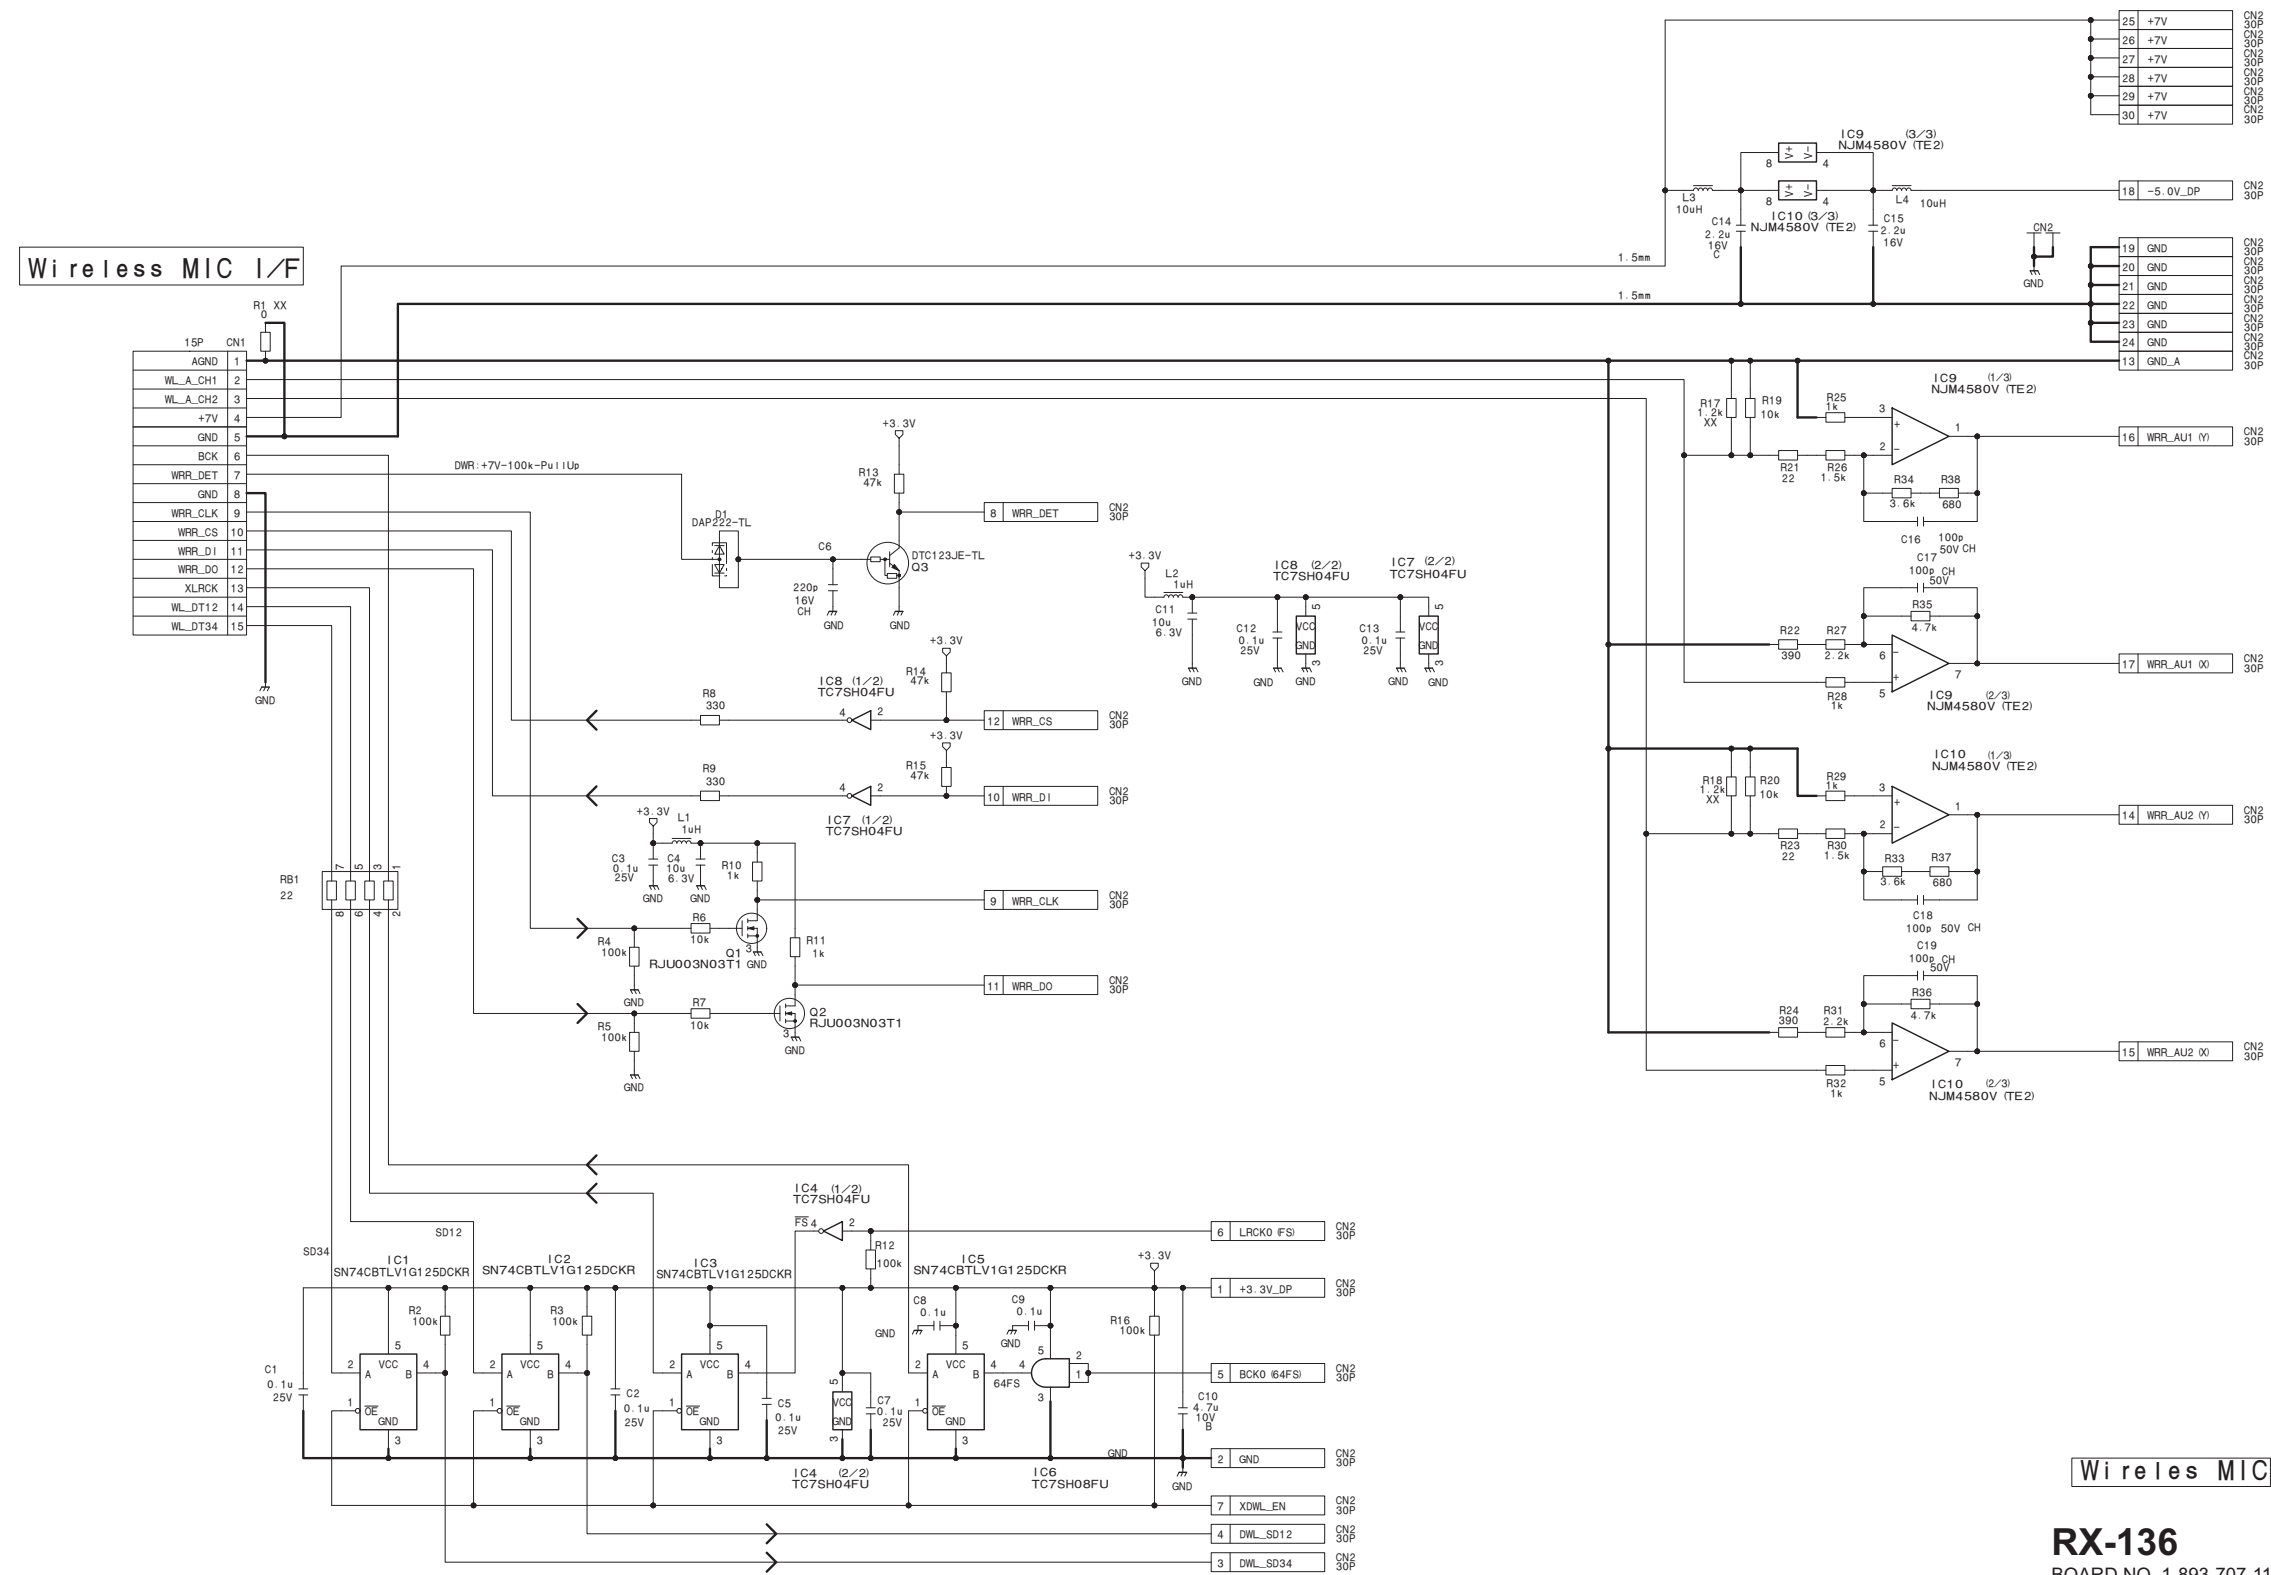

Wireless MIC


RX-136
BOARD NO. 1-893-707-11
RX-136_1

SD-58

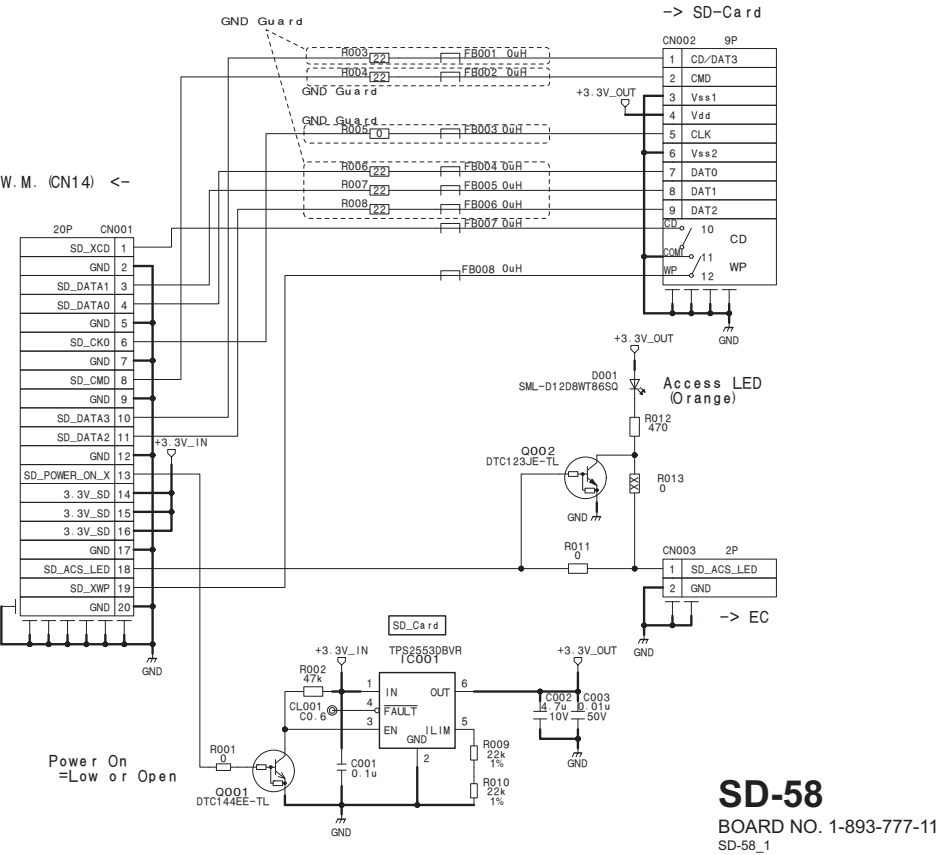


SD-58
BOARD NO. 1-893-777-11
SD-58_1

SE-1155

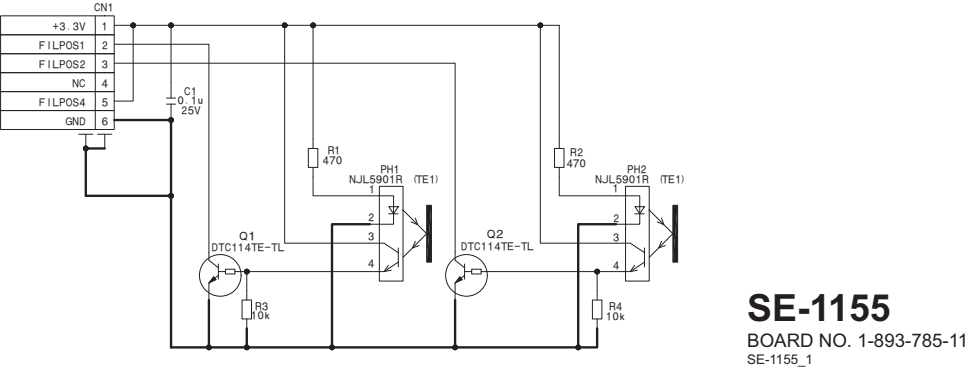


SE-1155
BOARD NO. 1-893-785-11
SE-1155_1

SW-1632

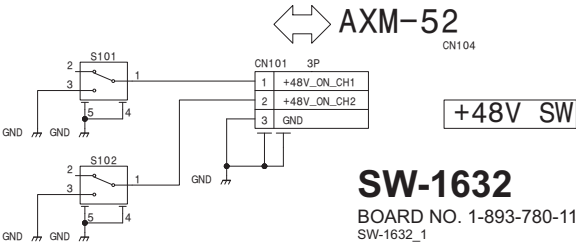


SW-1632
BOARD NO. 1-893-780-11
SW-1632_1

SW-1650

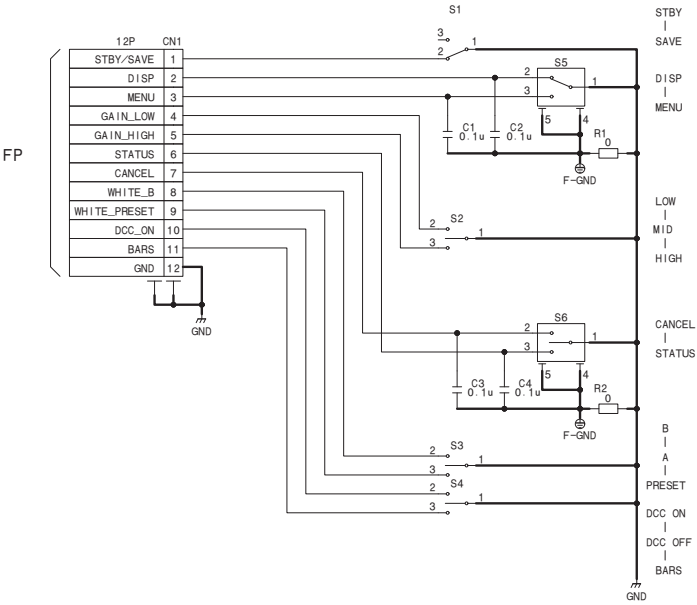


SW-1650
BOARD NO. 1-893-719-11
SW-1650_1


SW-1651

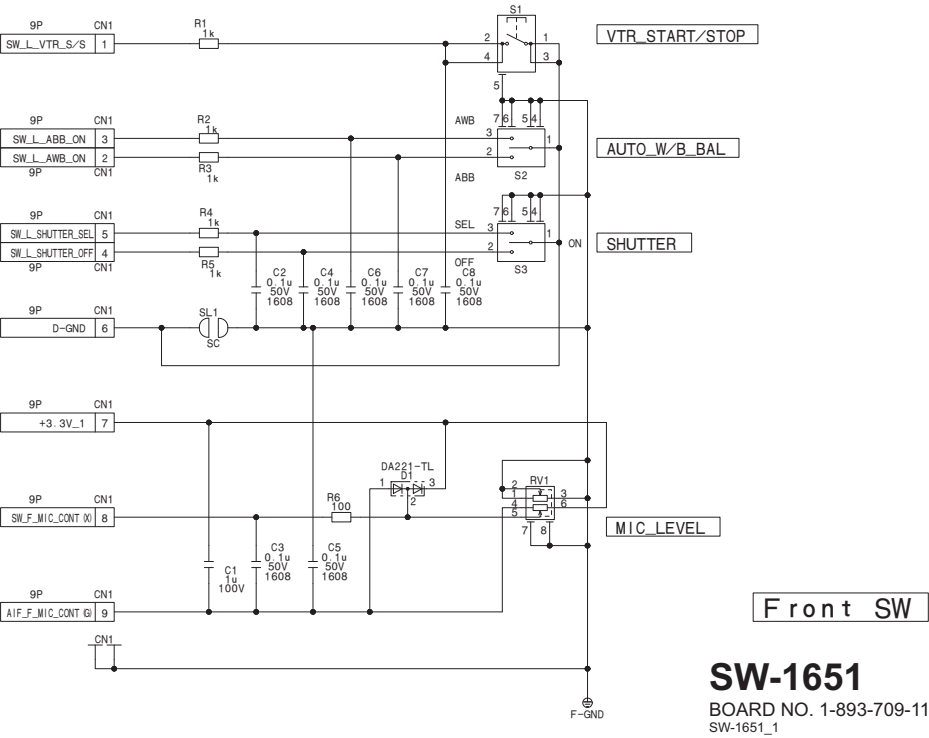

SW-1652

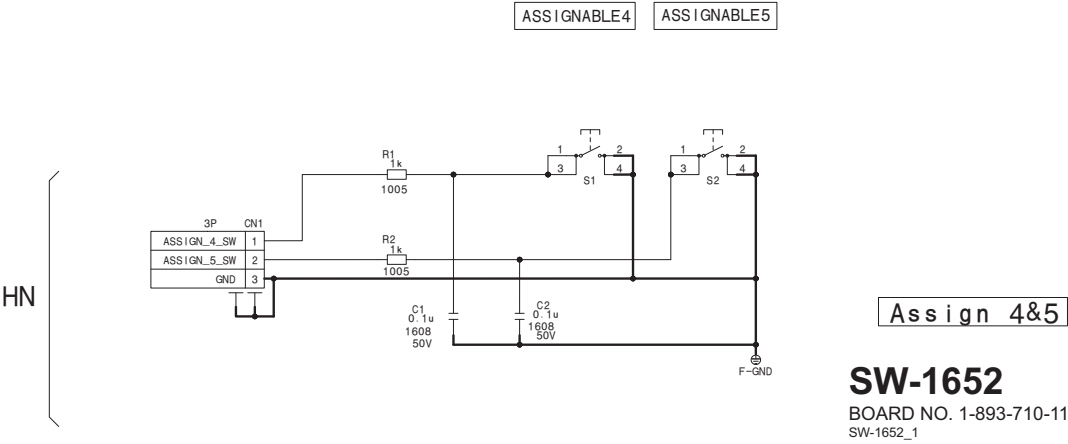


SW-1653

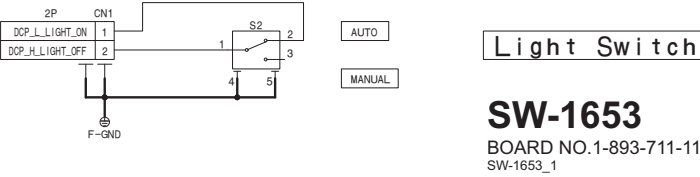



TG-287
TG-287 (1/3)

DCP I/F

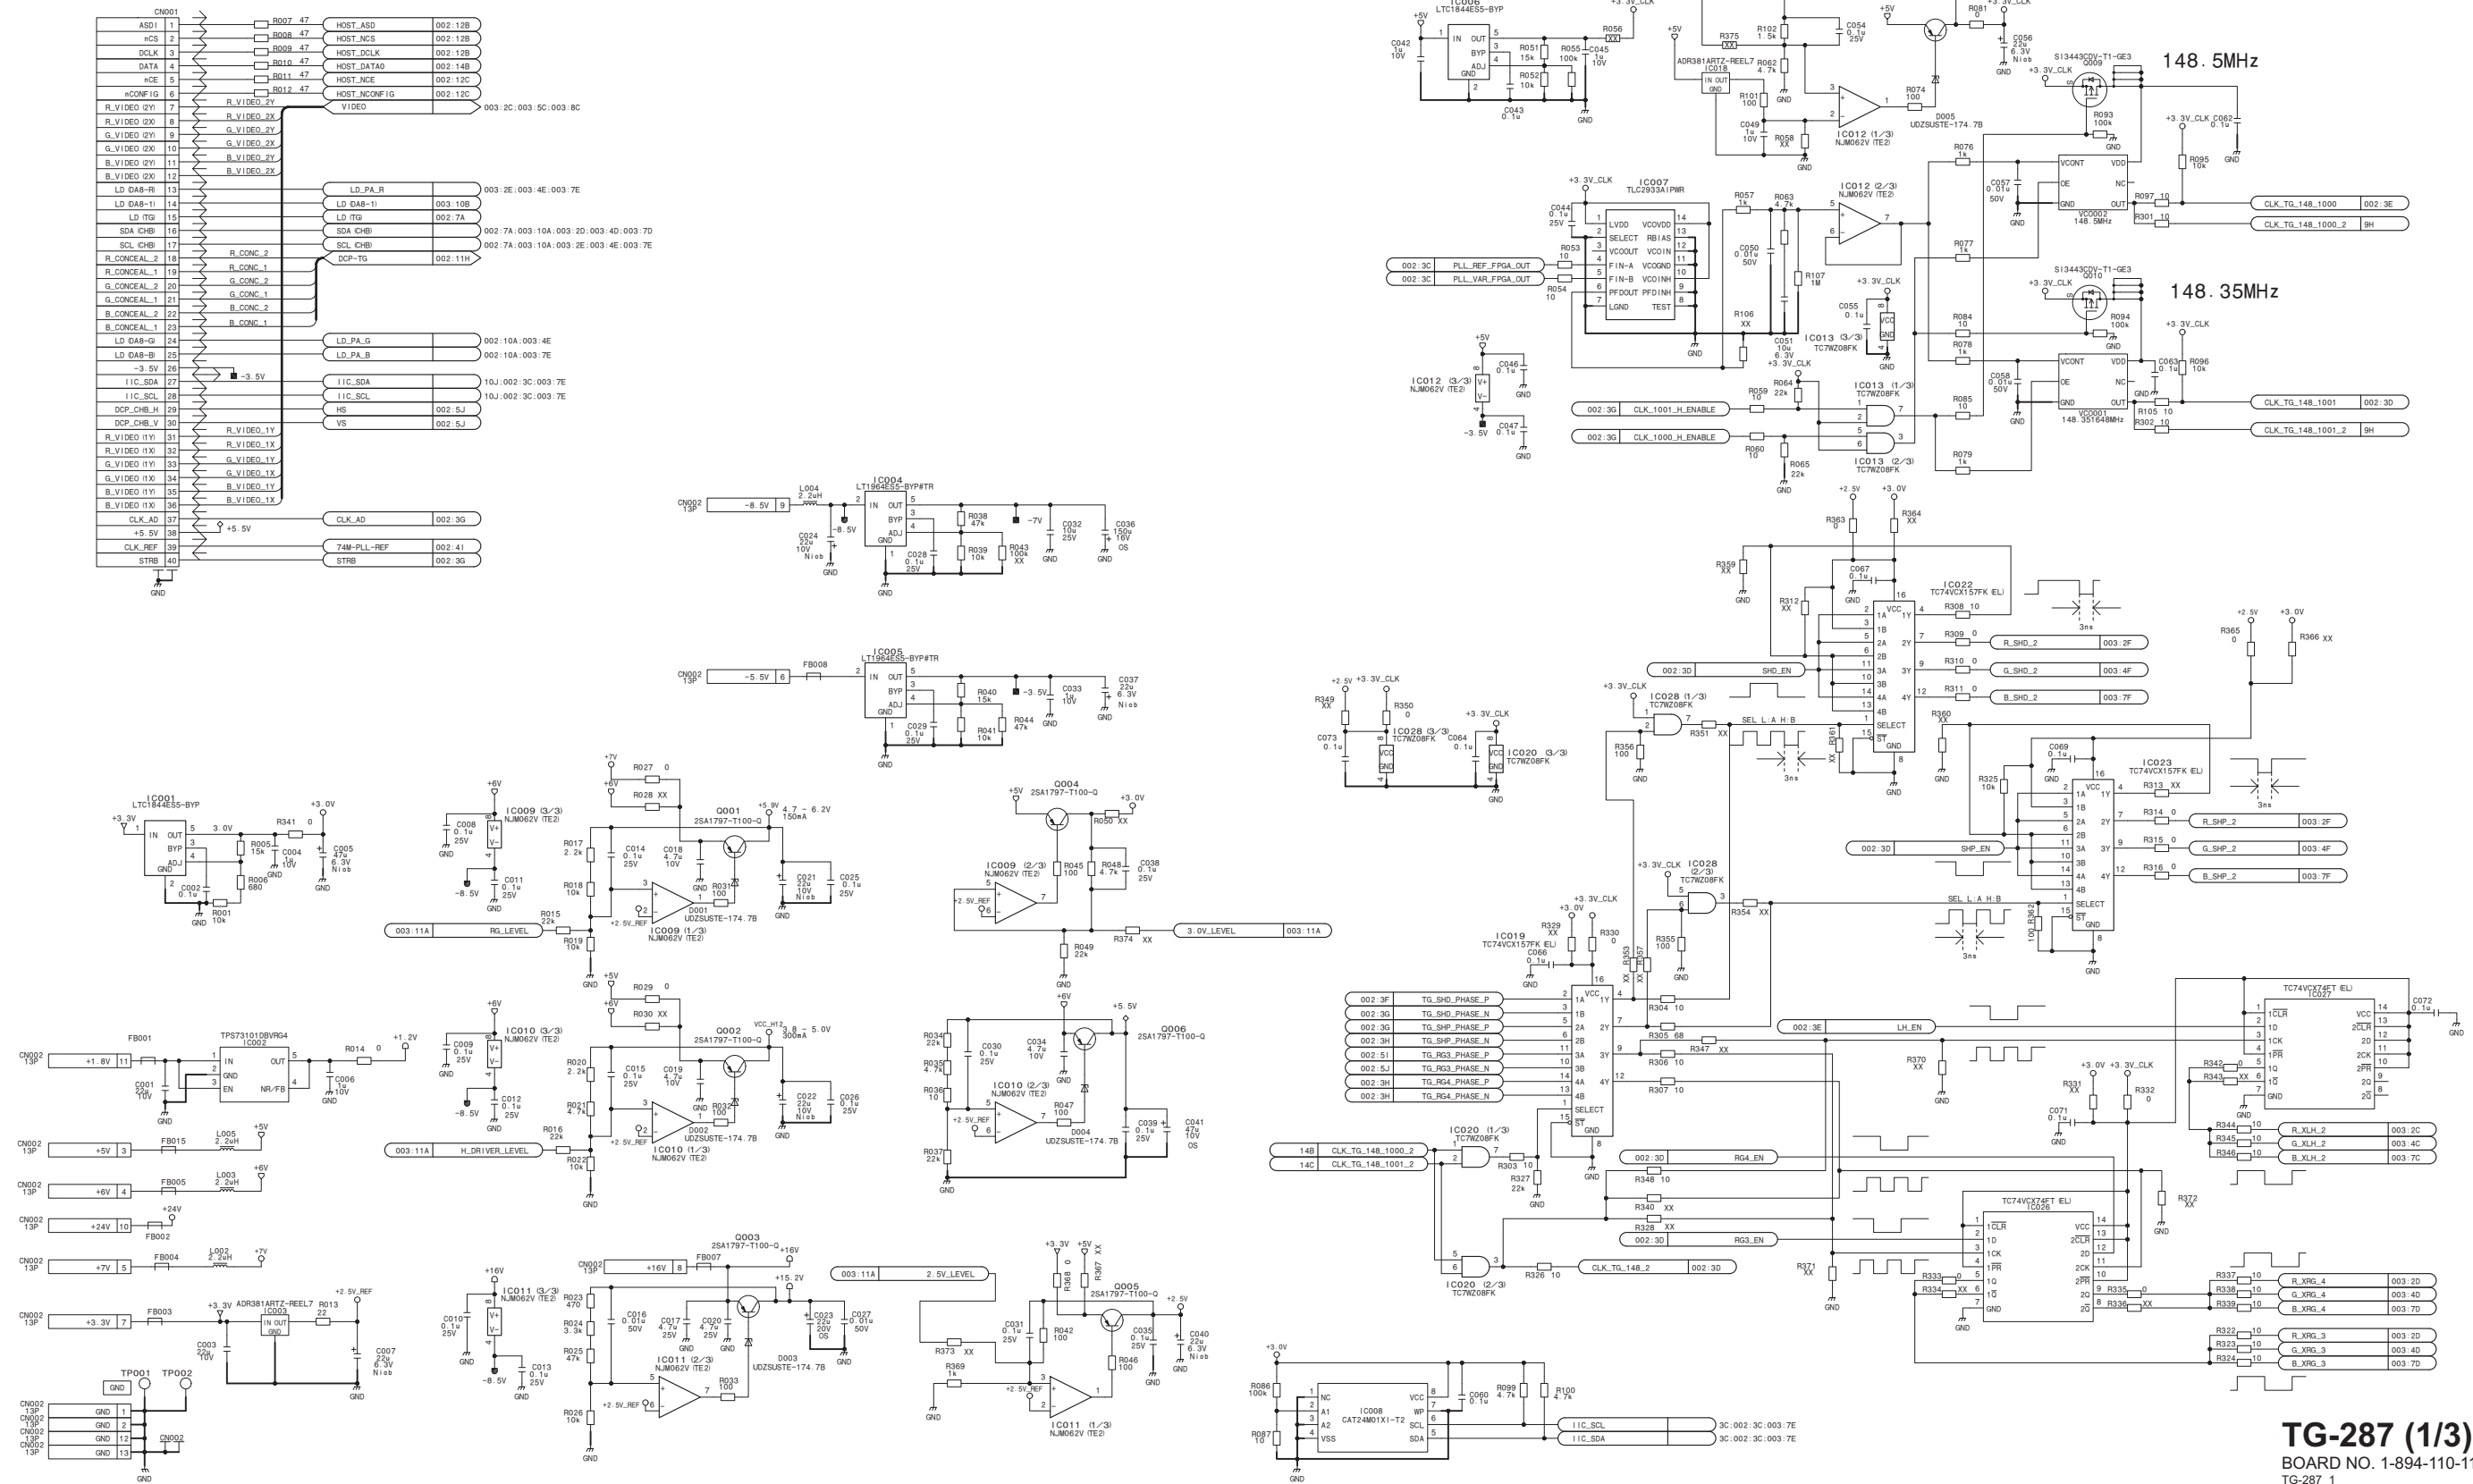

TG-287 (1/3)
BOARD NO. 1-894-110-11
TG-287_1

TG-287 (2/3)

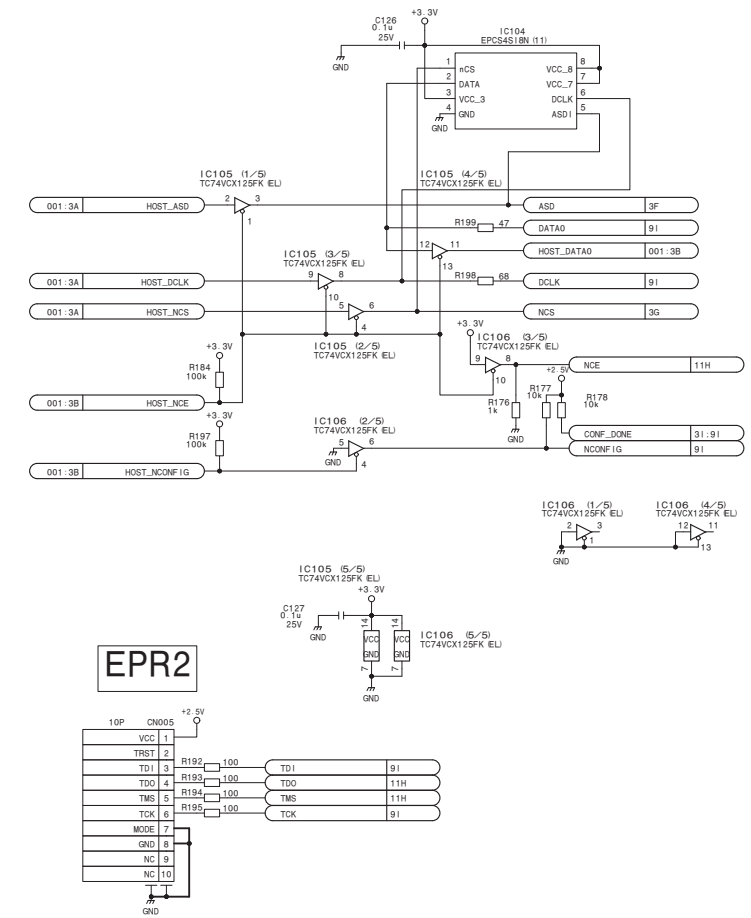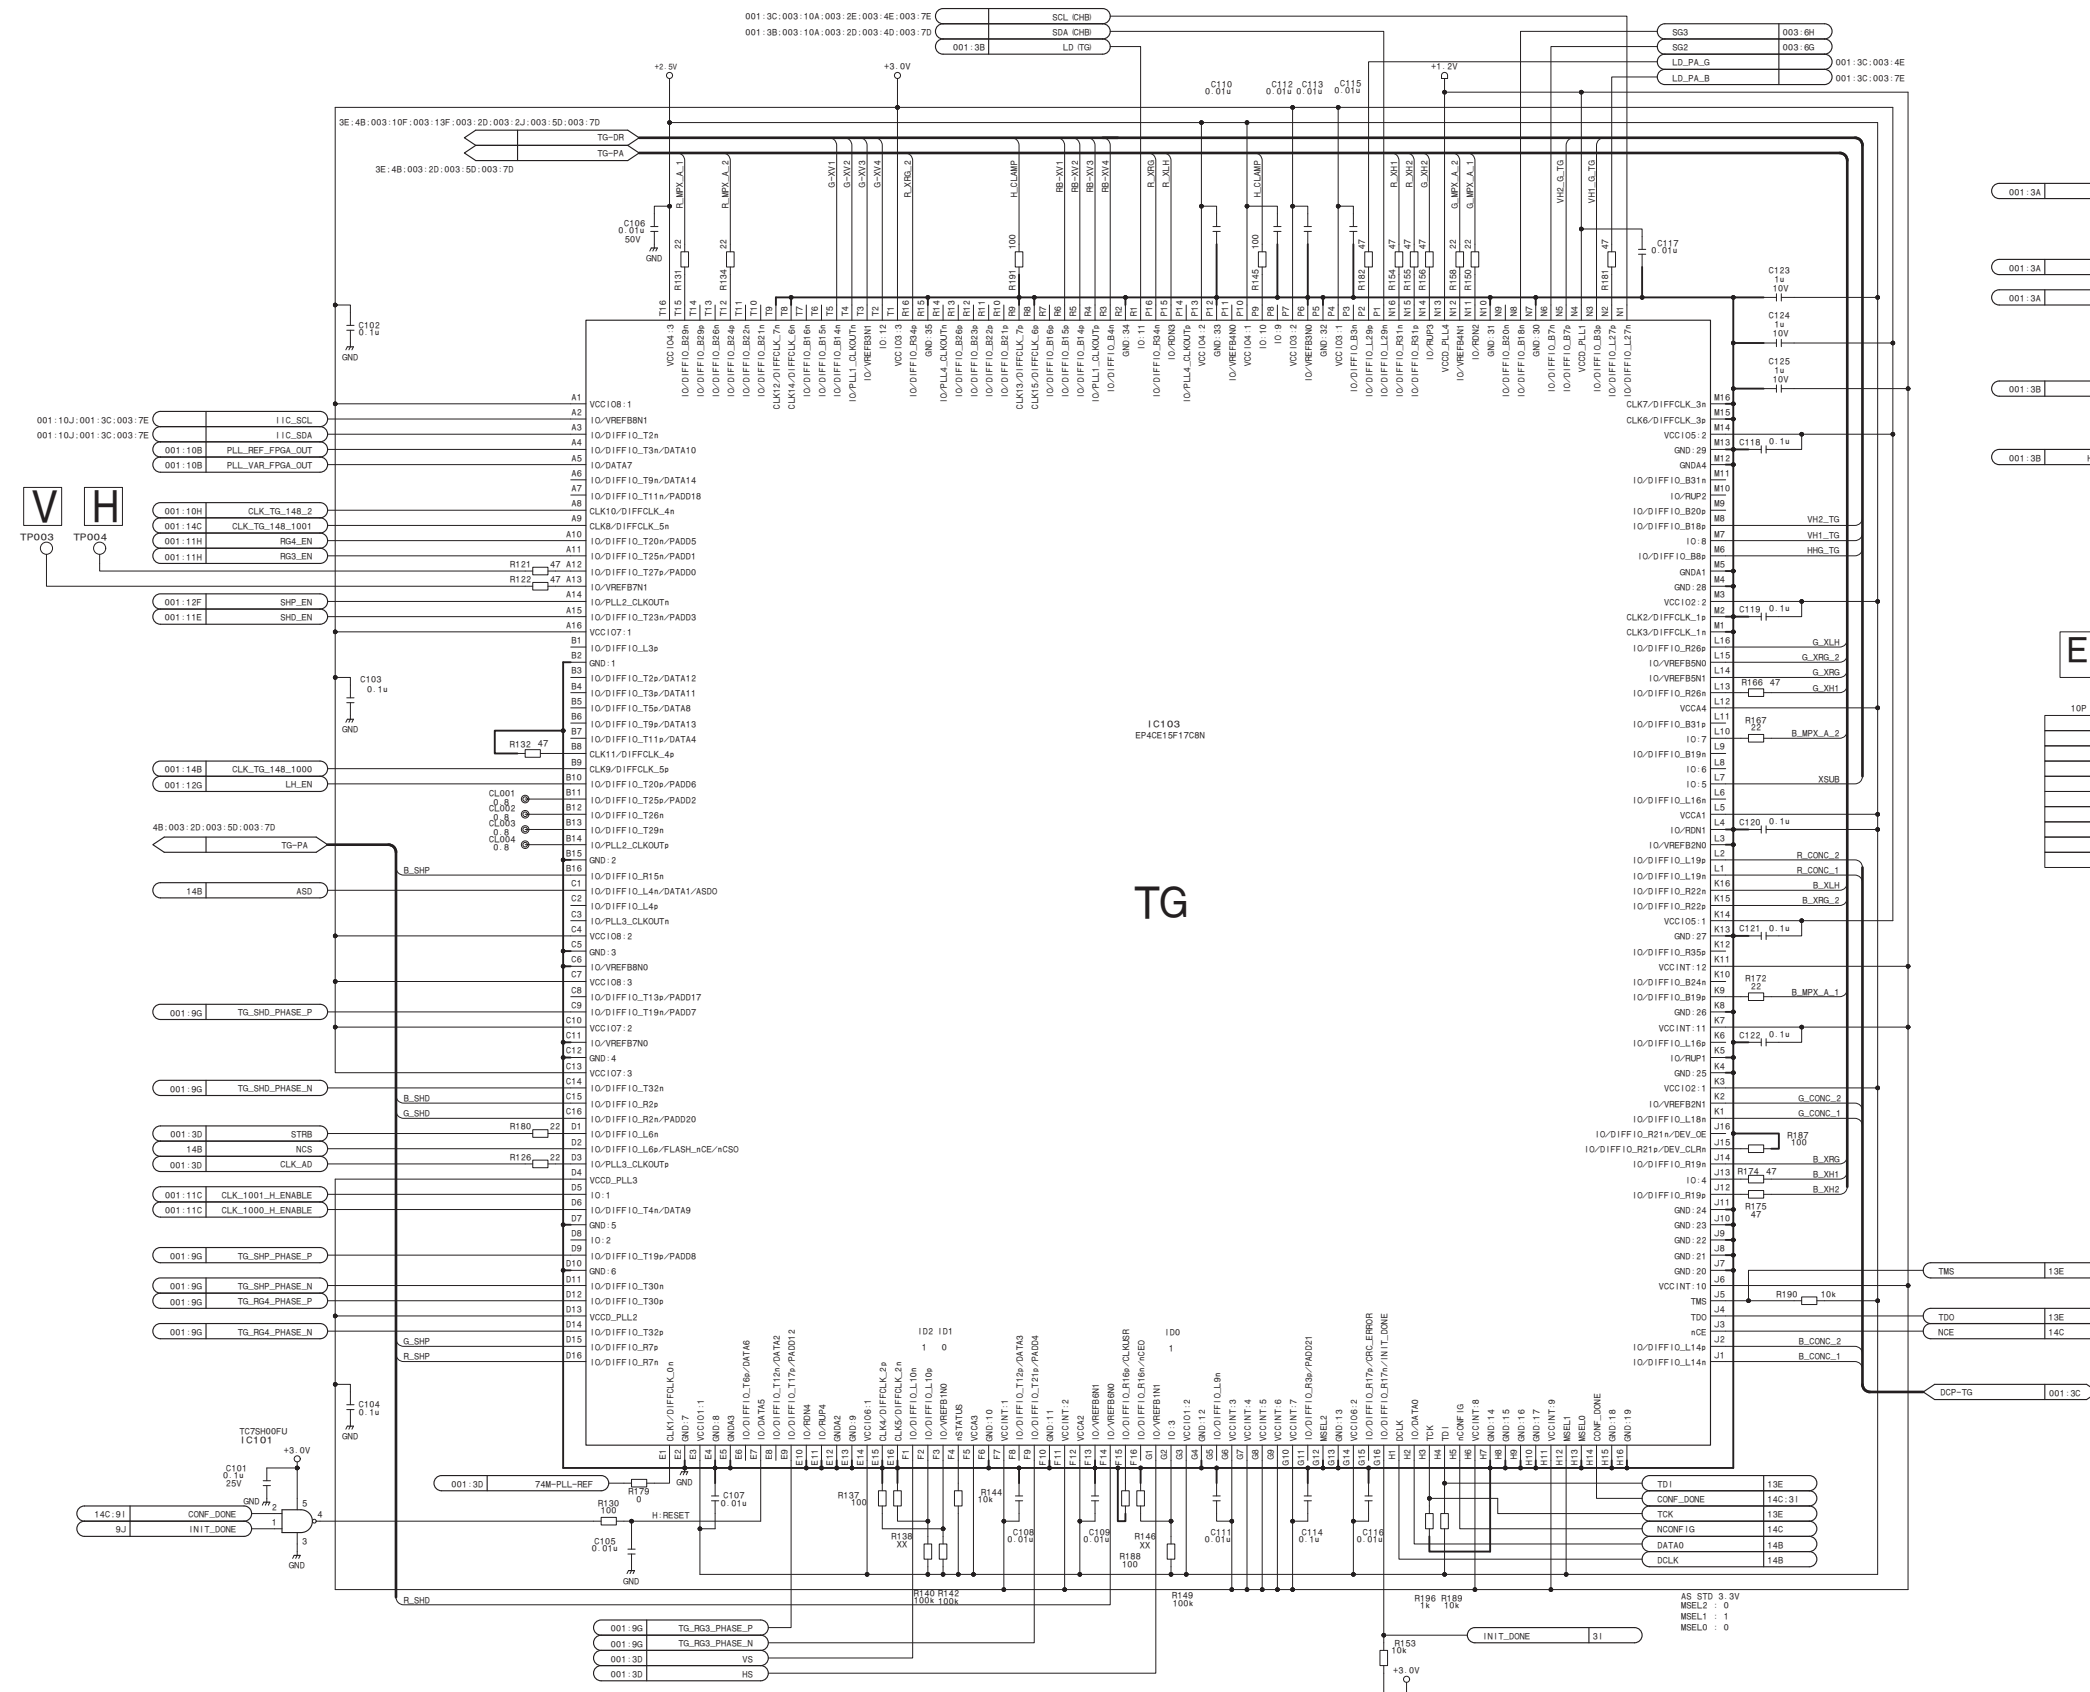


TG-287 (2/3)
BOARD NO. 1-894-110-11
TG-287_2




Section 3
Board Layouts

AU-360

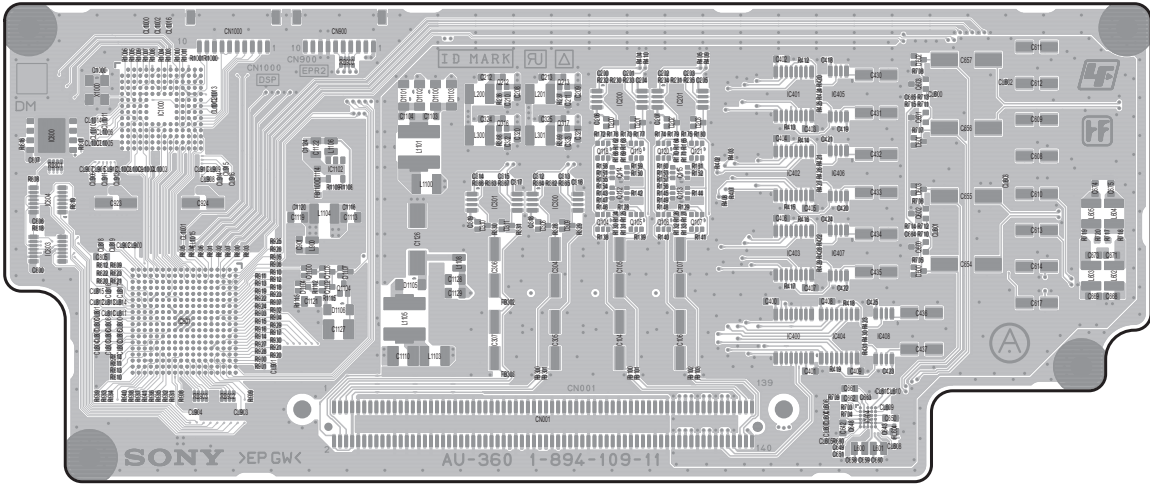


AU-360 -A SIDE-
SUFFIX: -11

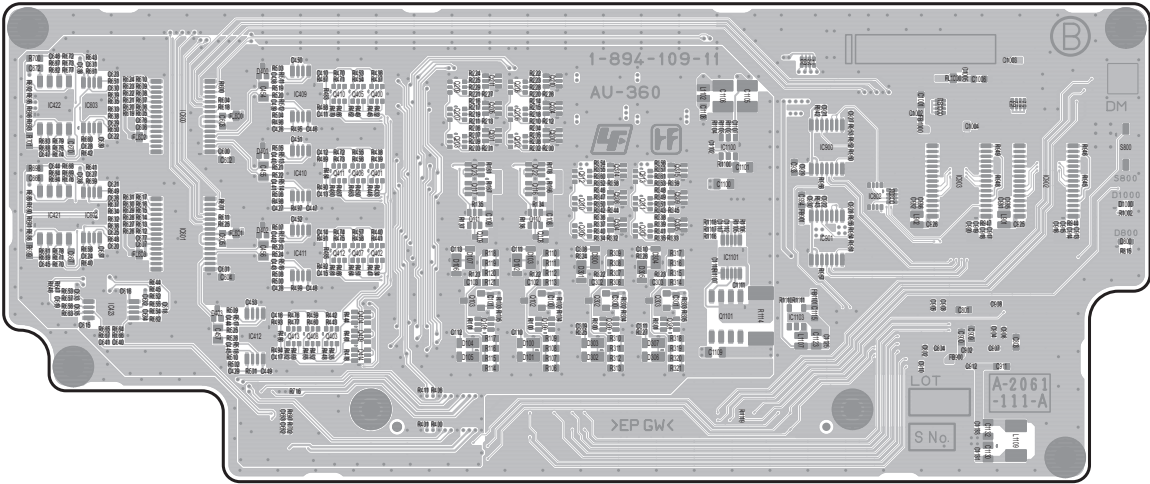


AU-360 -B SIDE-
SUFFIX: -11

AXM-52

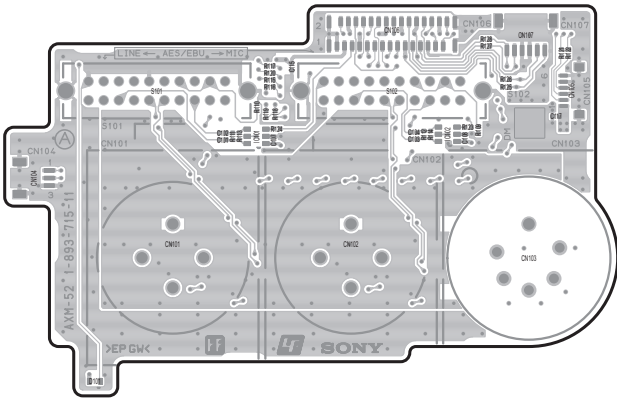


AXM-52 -A SIDE-
SUFFIX: -11

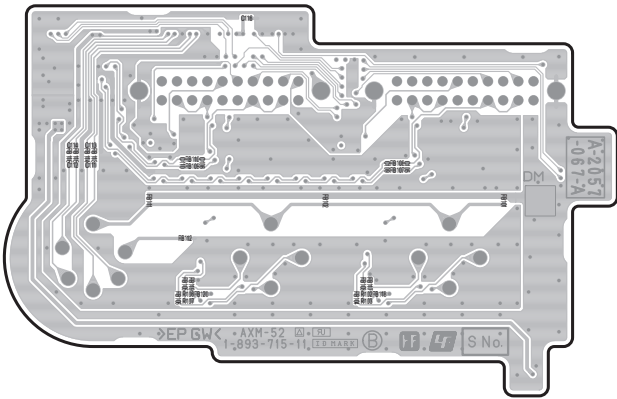


AXM-52 -A SIDE-
SUFFIX: -11

CI-50


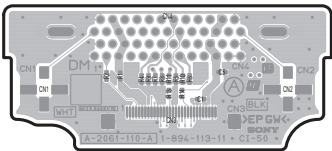


CI-50 -A SIDE-
SUFFIX: -11

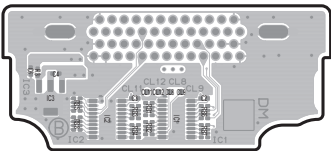


CI-50 -B SIDE-
SUFFIX: -11


CN-3722




CN-3723



CN-3738

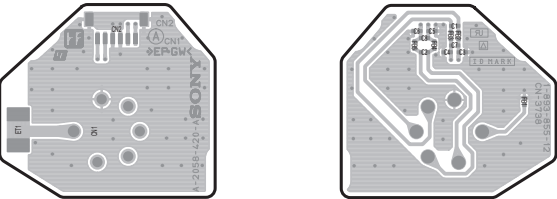


CN-3736

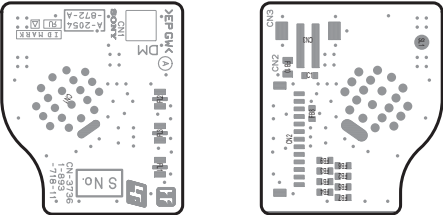


CN-3738 -A SIDE-
SUFFIX: -12

CN-3738 -B SIDE-
SUFFIX: -12


CN-3737

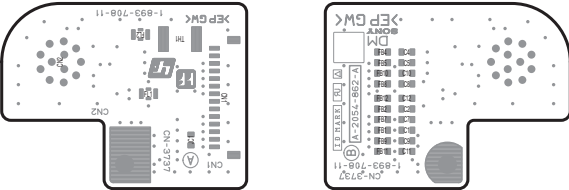

DCP-67 [SUFFIX: -11]

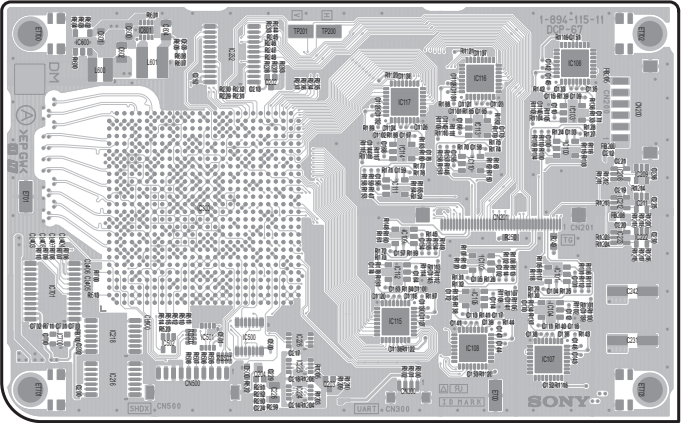


DCP-67 -A SIDE-
SUFFIX: -11

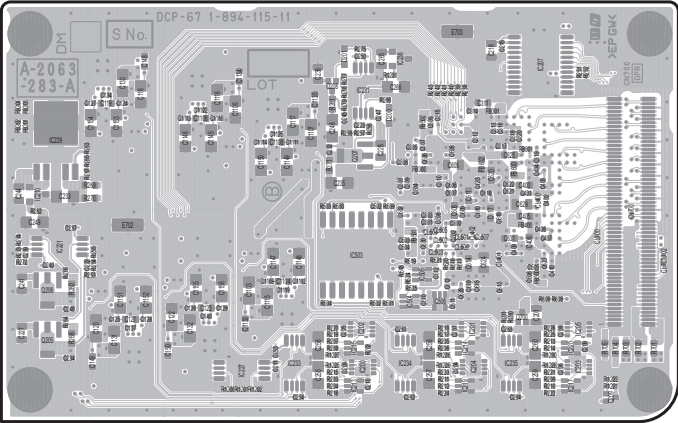


DCP-67 -B SIDE-
SUFFIX: -11

DCP-67 [SUFFIX:-12]

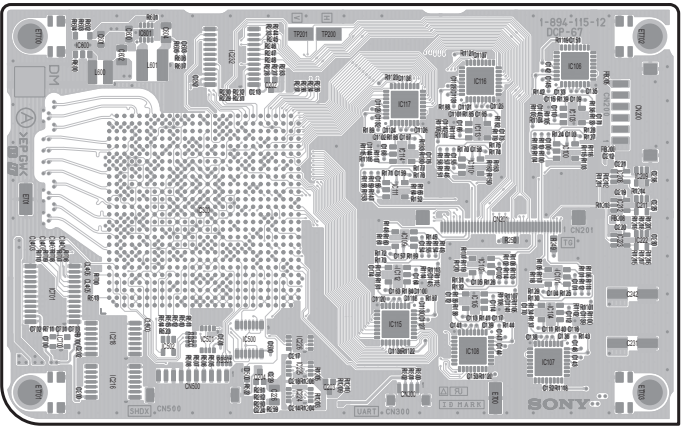

DCP-67 -A SIDE-
SUFFIX: -12

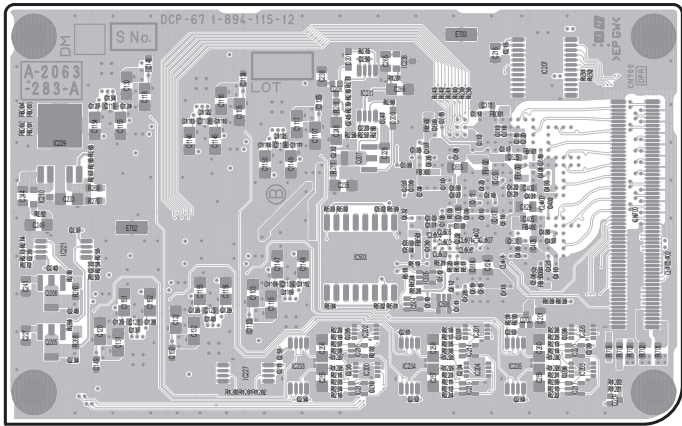

DCP-67 -B SIDE-
SUFFIX: -12

DET-50




DET-50 -A SIDE-
SUFFIX: -11




DET-50 -B SIDE-
SUFFIX: -11

DET-60




DET-60 -A SIDE-
SUFFIX: -11




DET-60 -B SIDE-
SUFFIX: -11

DIF-232


The location is described at the end in this section.

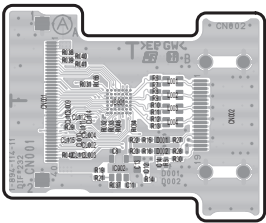


DIF-232 -A SIDE-
SUFFIX: -11

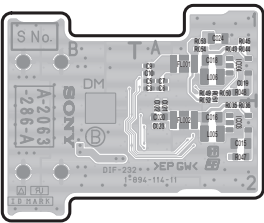

DIF-232 -B SIDE-
SUFFIX: -11

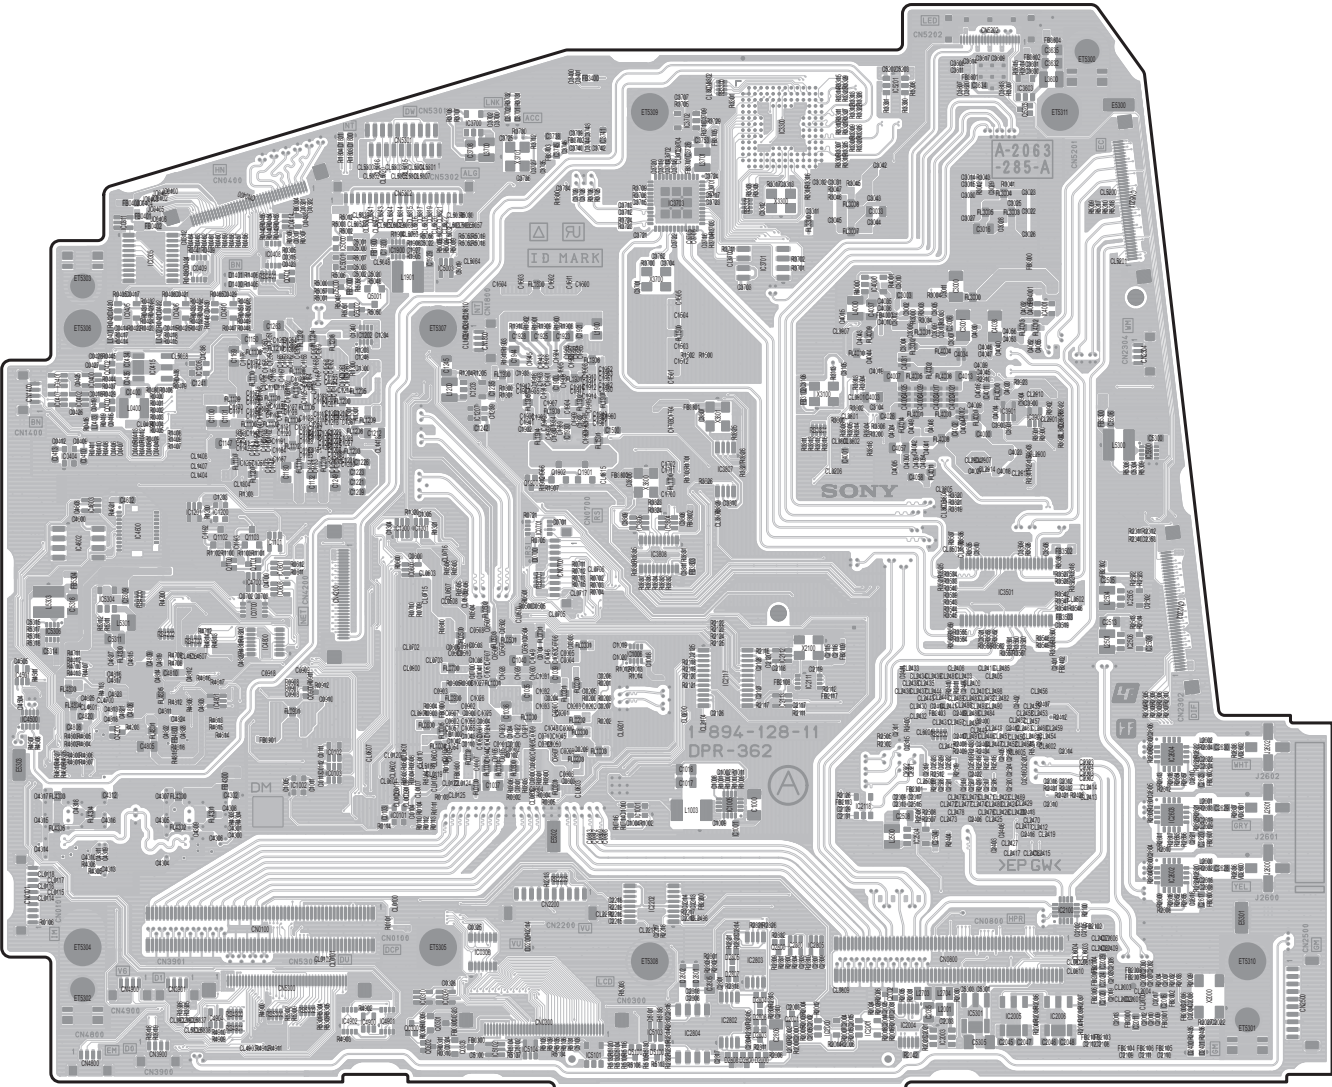


DPR-362 -A SIDE-
SUFFIX: -12

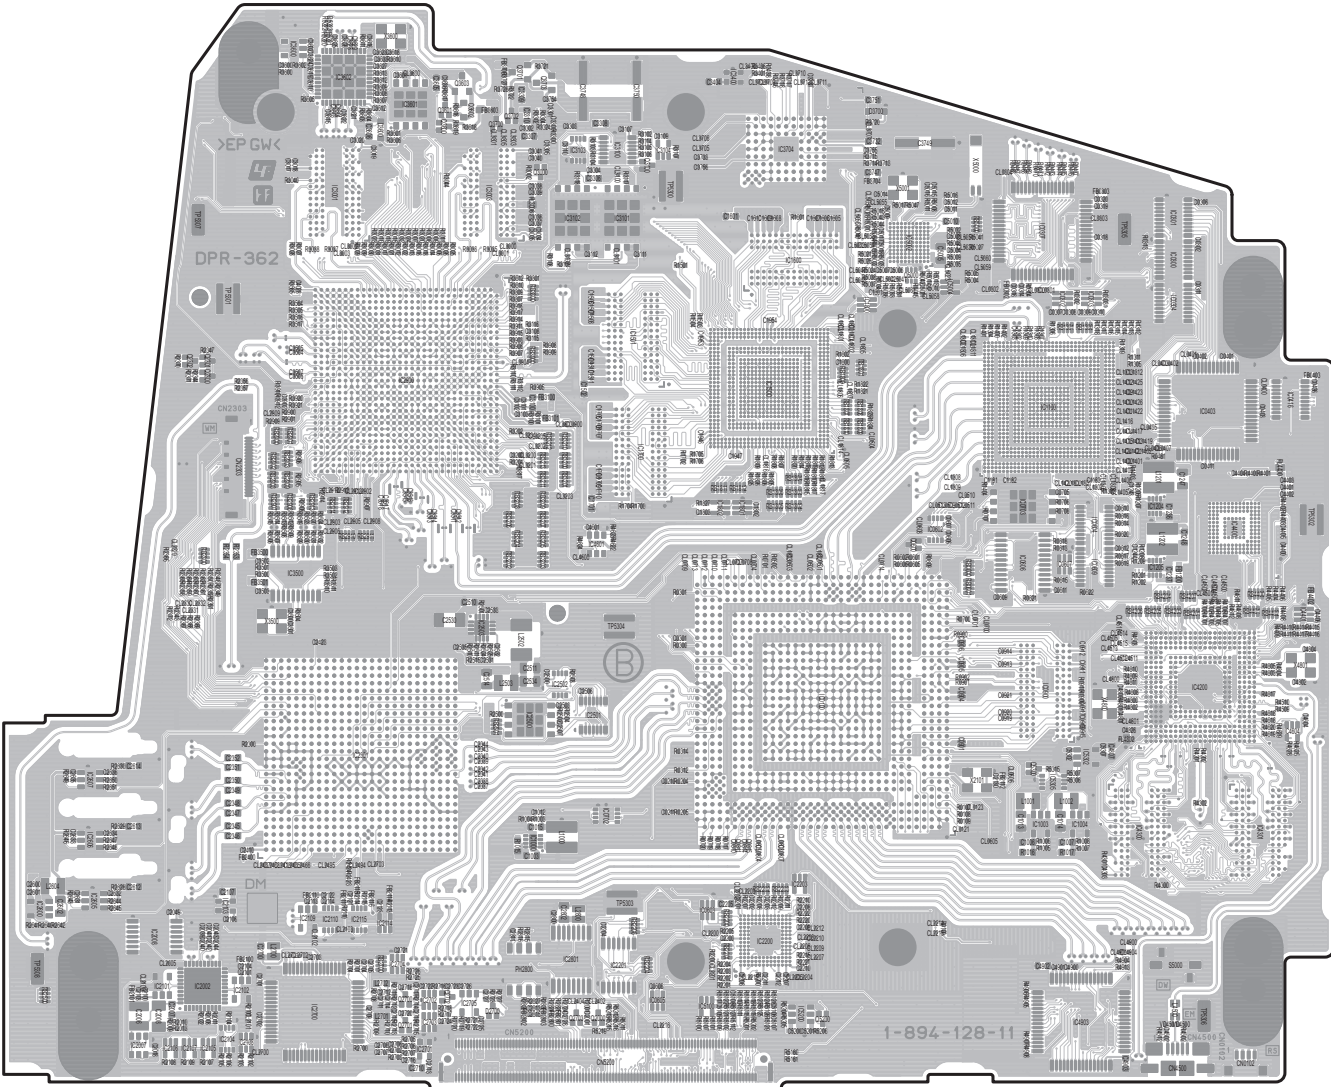


DPR-362 -B SIDE-
SUFFIX: -11

DPR-362 [SUFFIX:-12]


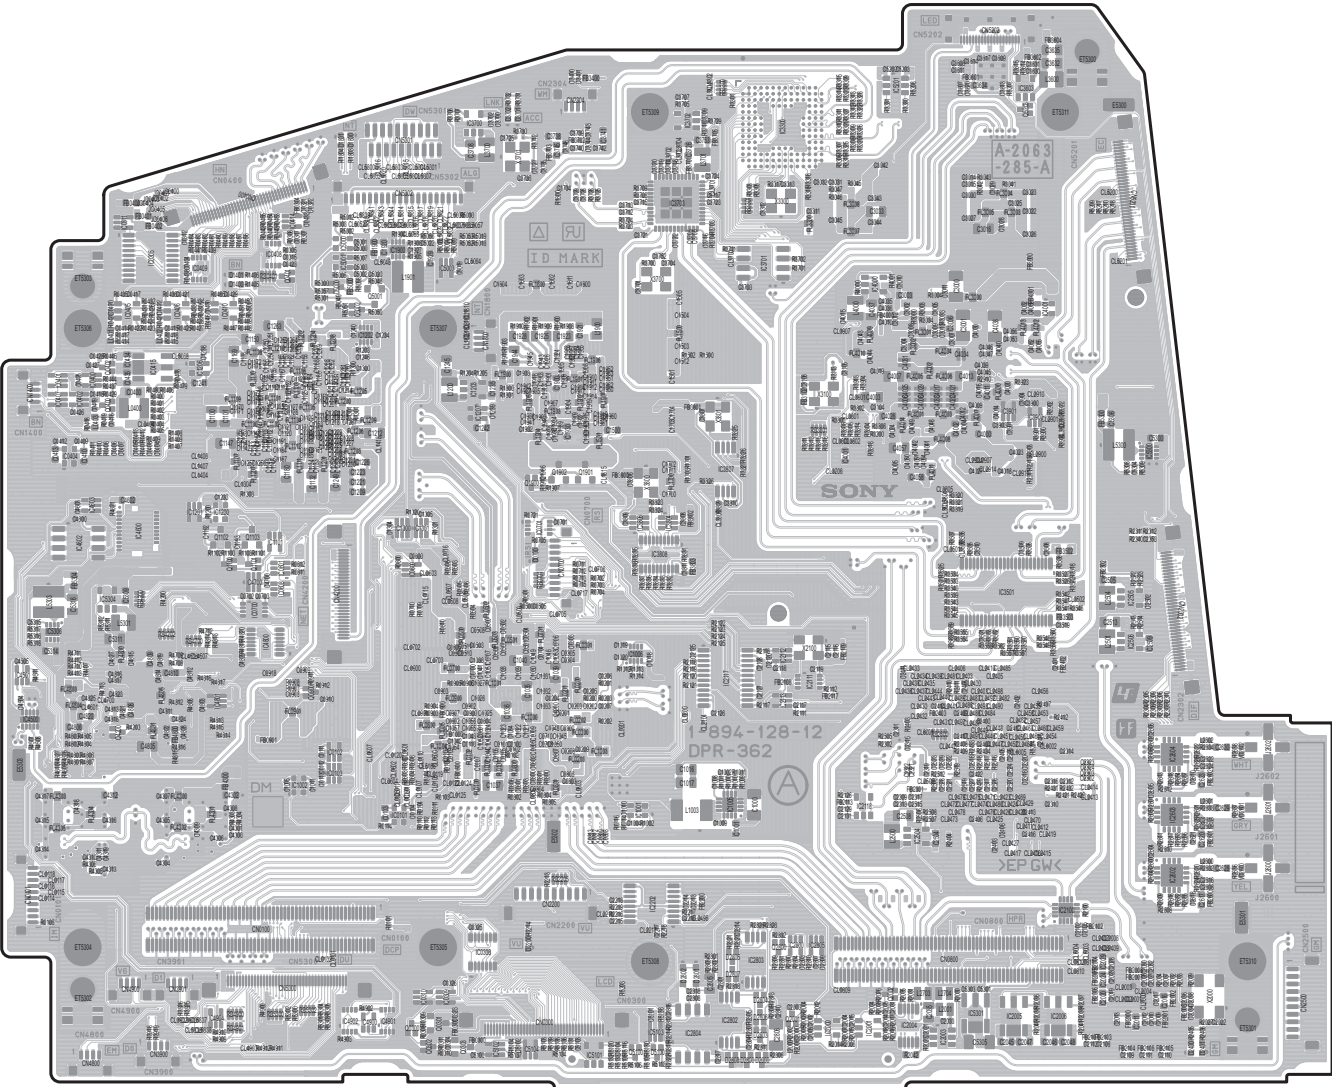


DPR-362 -A SIDE-
SUFFIX: -12

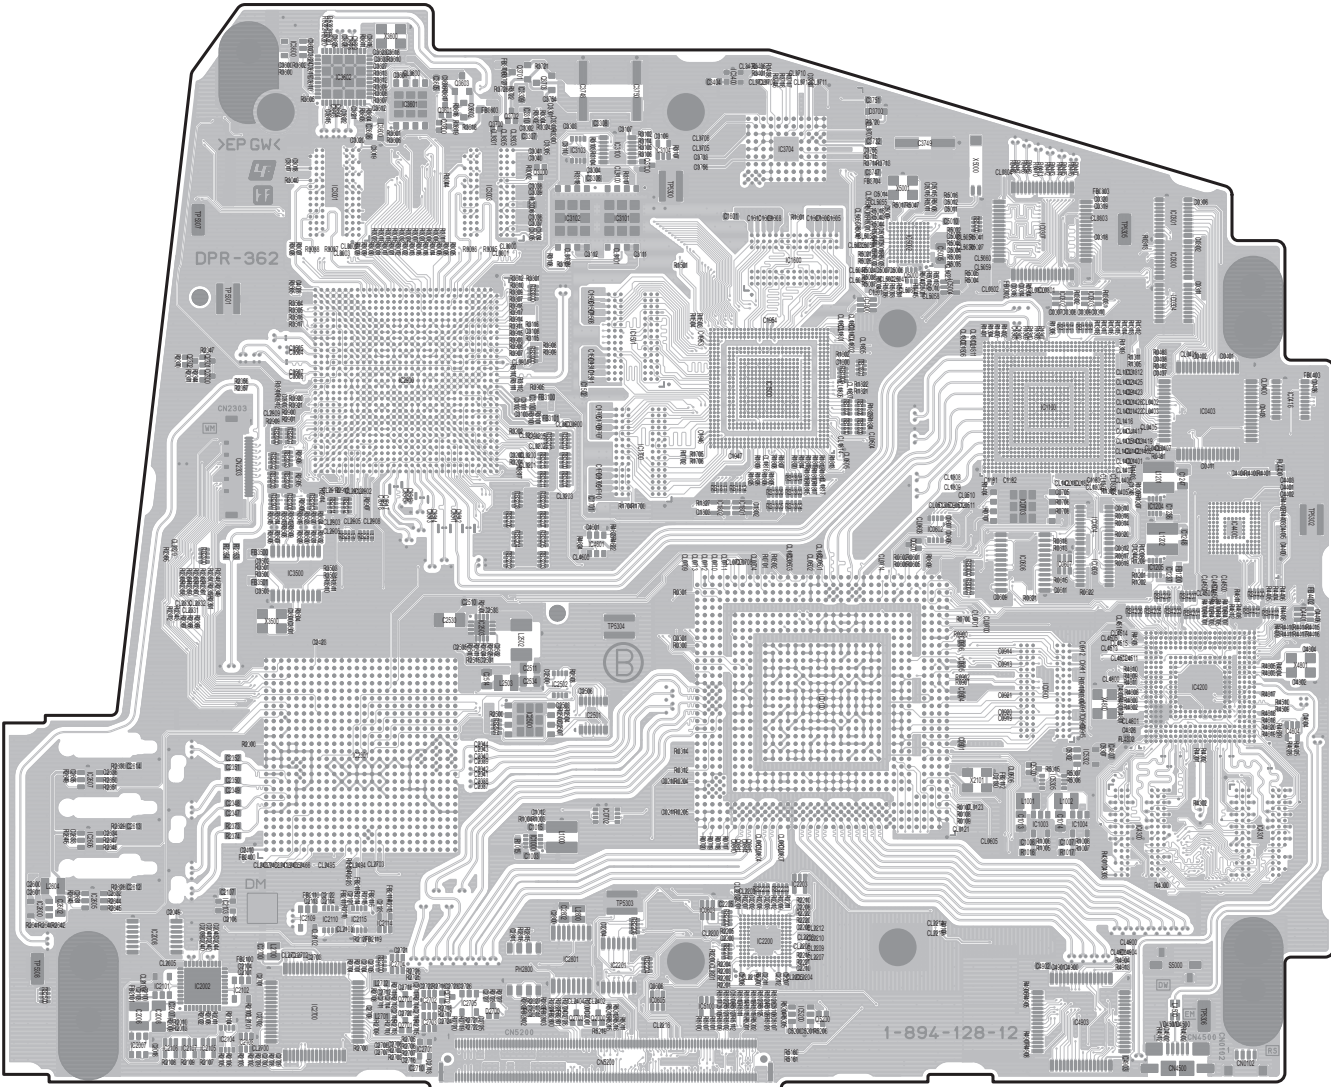

DPR-362 -B SIDE-
SUFFIX: -12


EC-82

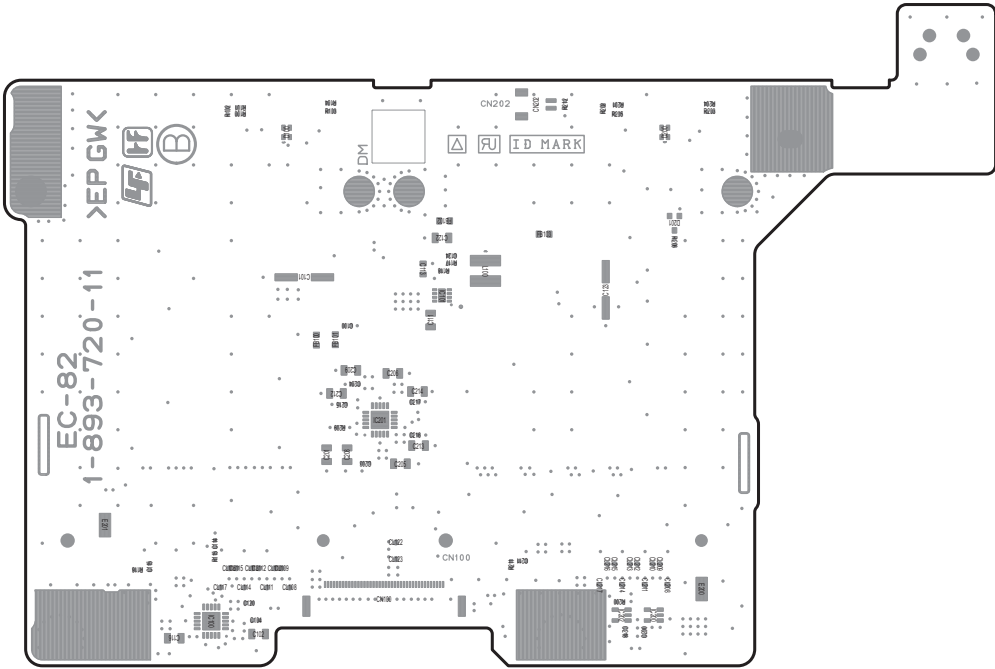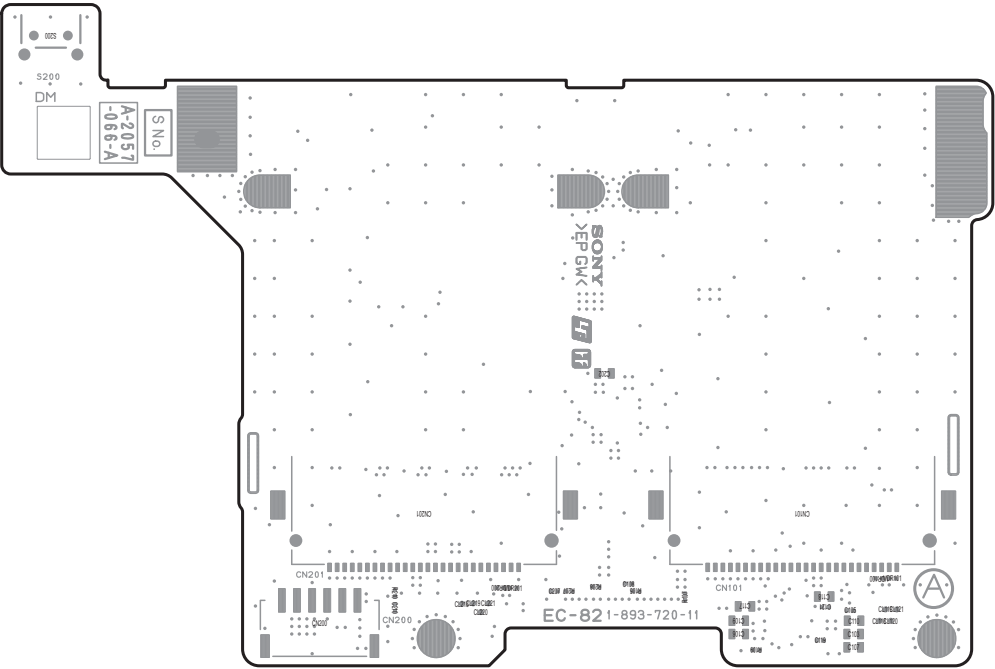


ENC-162




ENC-162 -A SIDE-
SUFFIX: -11



ENC-162 -B SIDE-
SUFFIX: -11

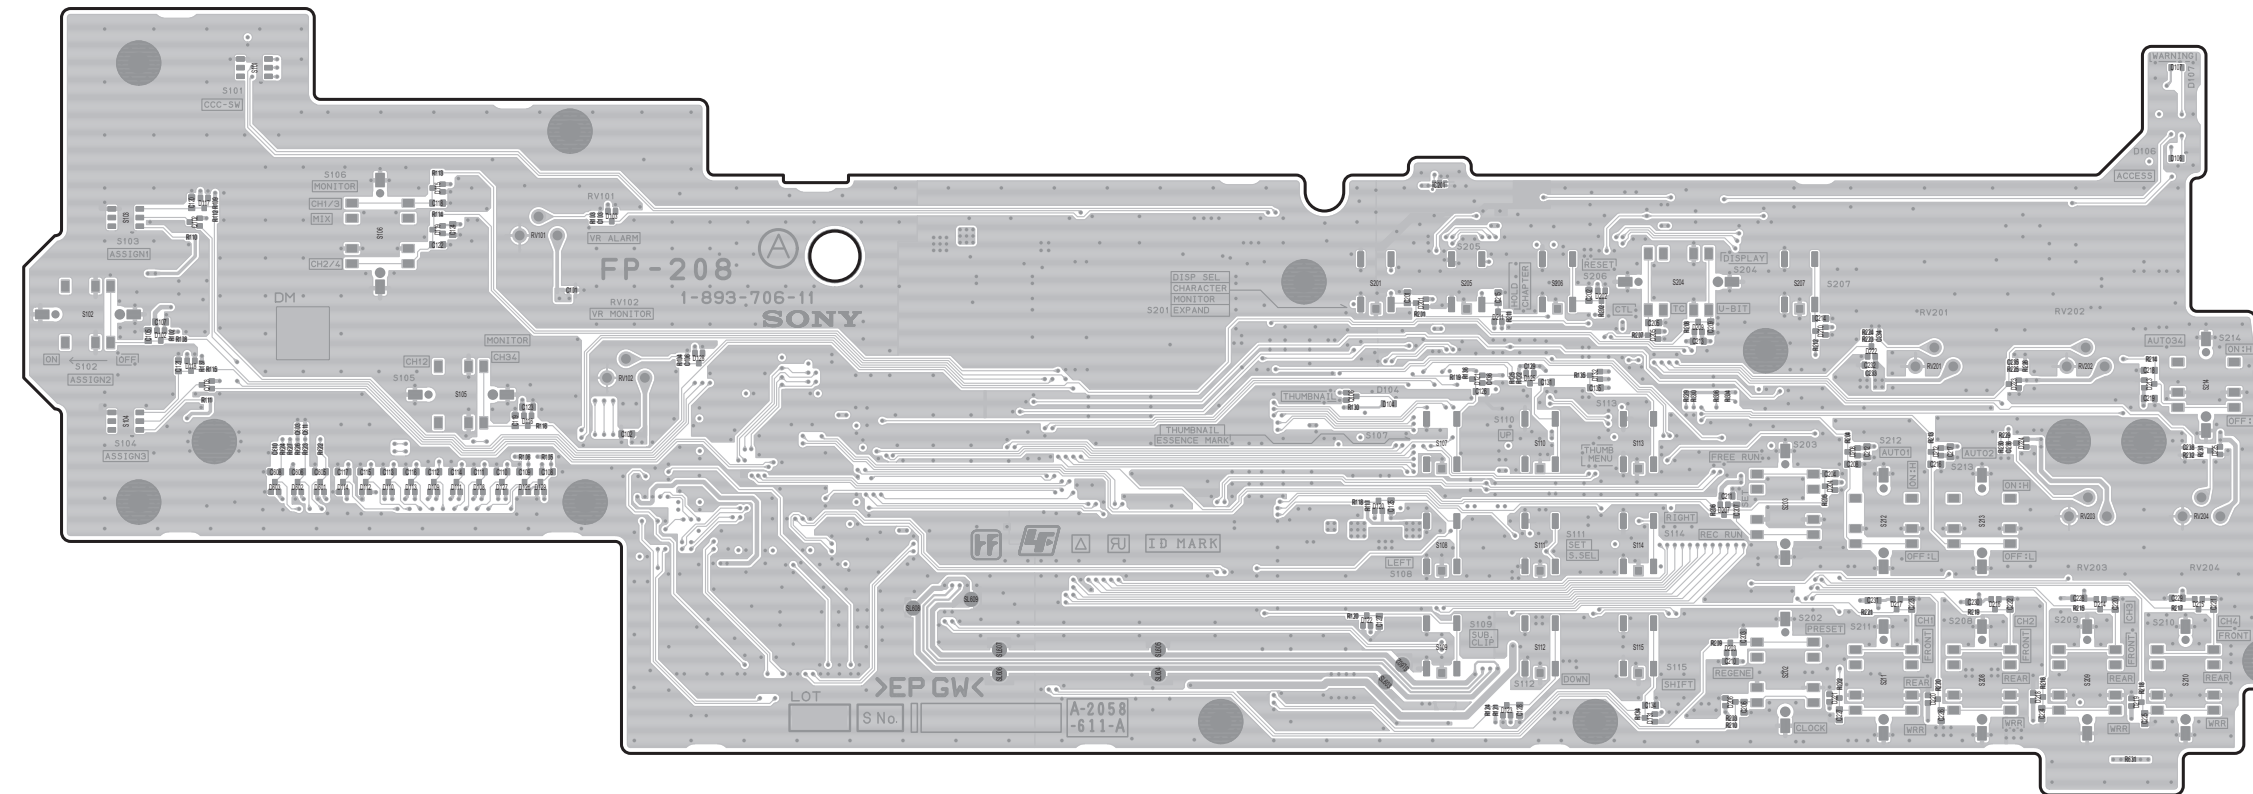
FP-208

FP-208 -B SIDE-SUFFIX: -11

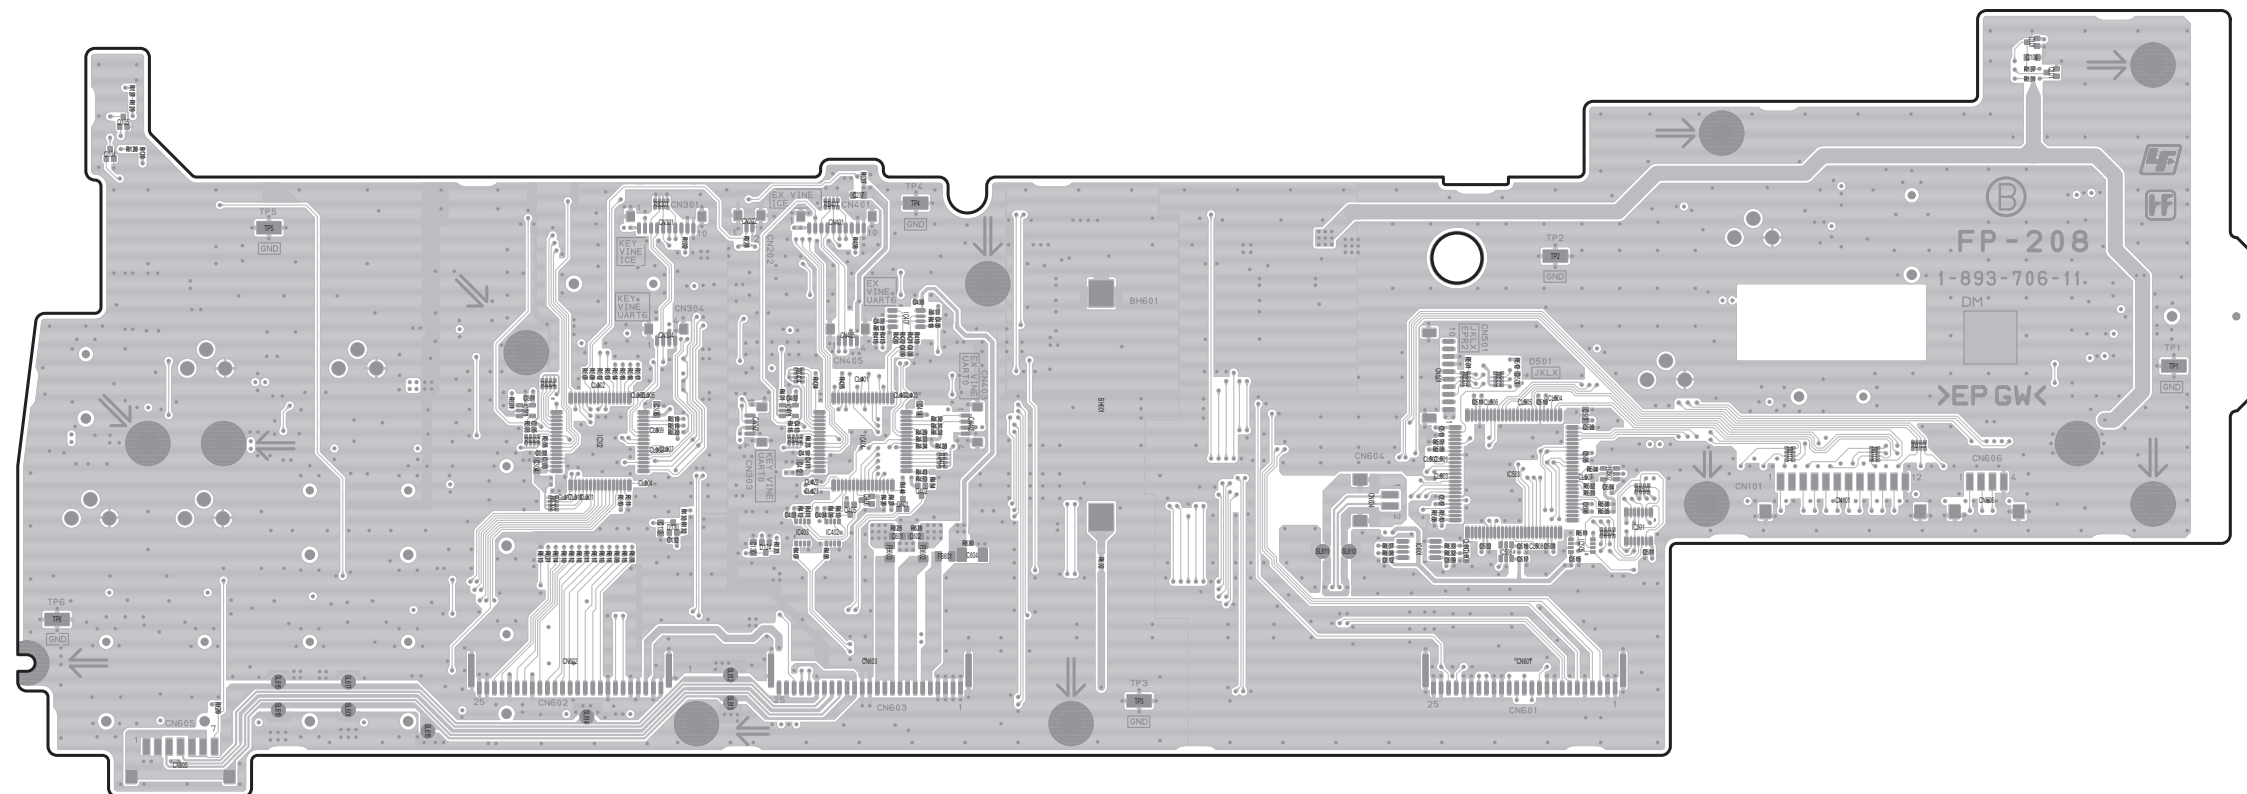

FP-208 -A SIDE-
SUFFIX: -11


HN-415

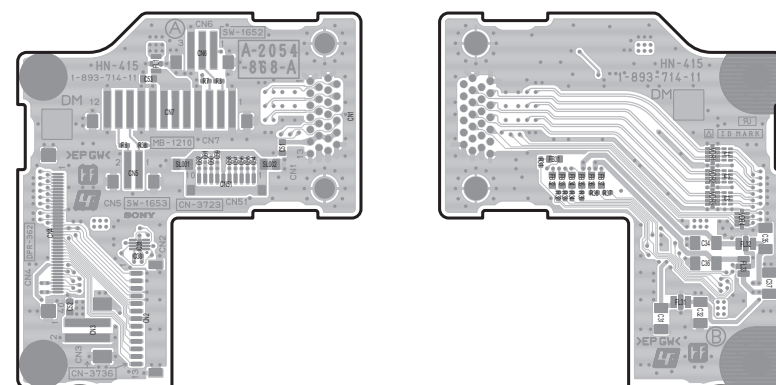


HN-415 -A SIDE-
SUFFIX: -11

HN-415 -B SIDE-
SUFFIX: -11


HP-171

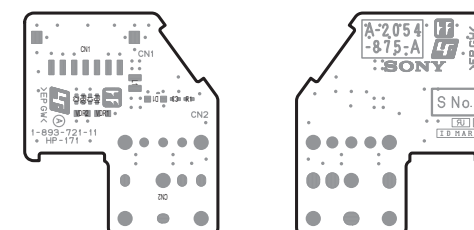

HPR-53

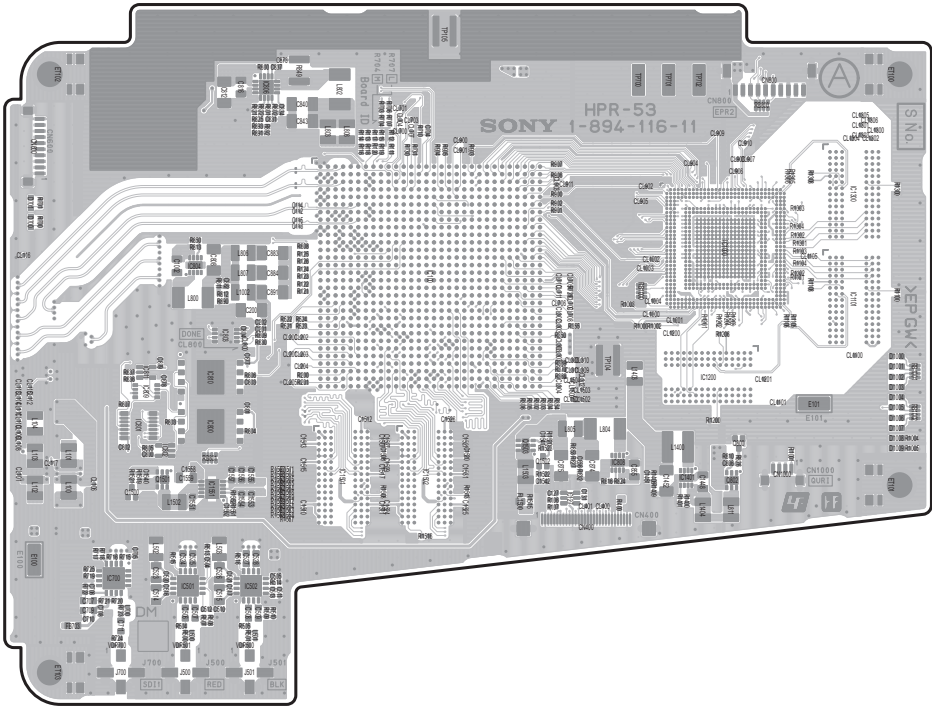


HPR-53 -A SIDE-
SUFFIX: -11

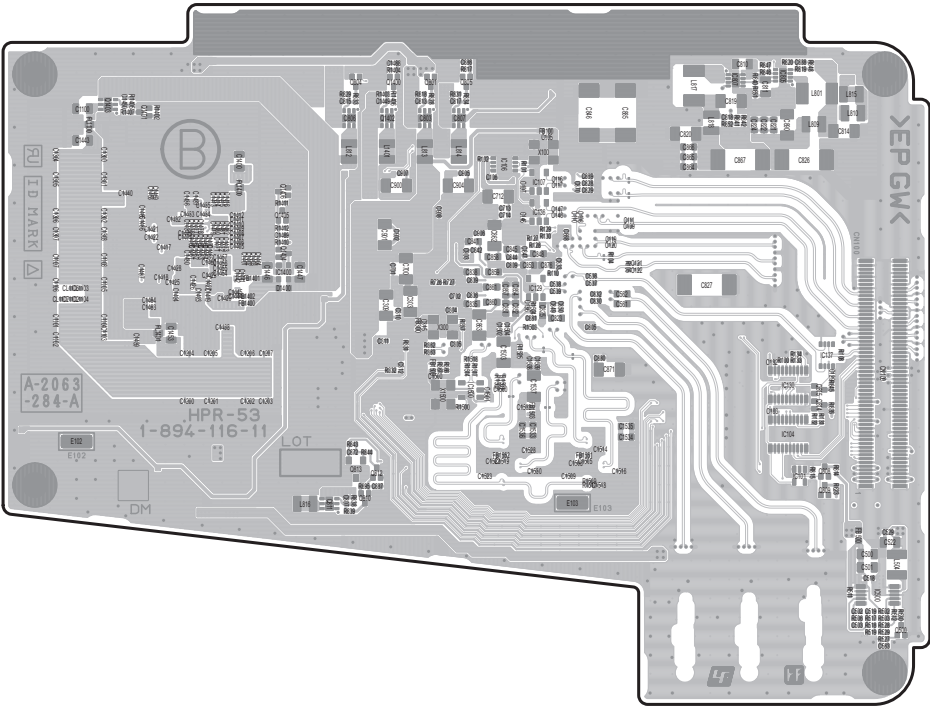


HPR-53 -B SIDE-
SUFFIX: -11

IF-1209

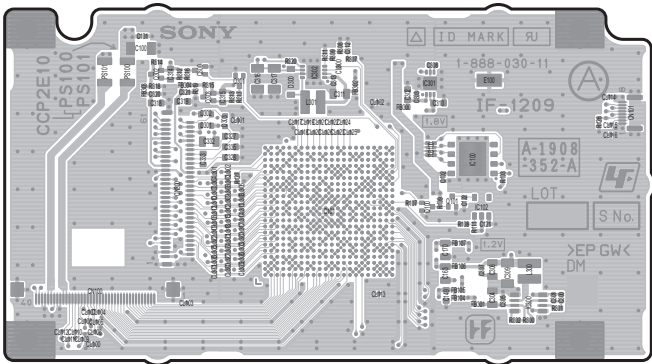


IF-1209 -A SIDE-
SUFFIX: -11

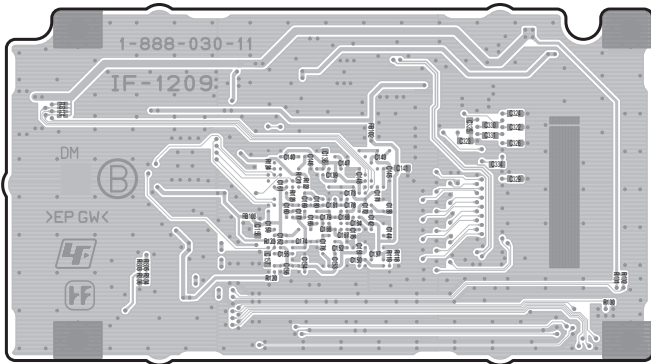


IF-1209 -B SIDE-
SUFFIX: -11

IO-275


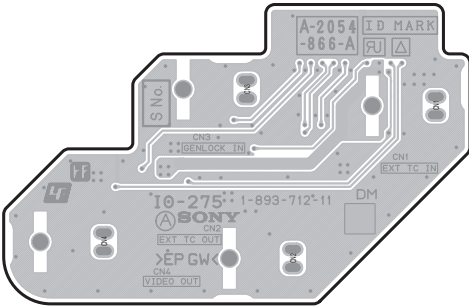


IO-275 -A SIDE-
SUFFIX: -11


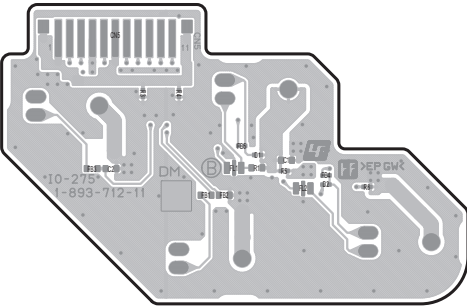




IO-275 -B SIDE-
SUFFIX: -11

KY-736

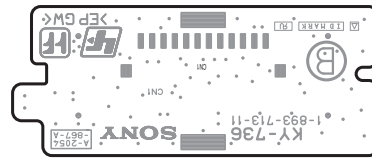
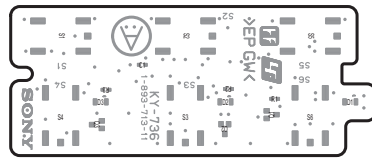


LED-529

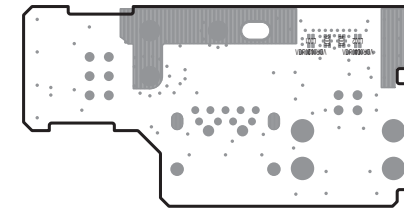
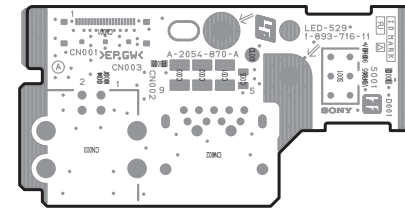


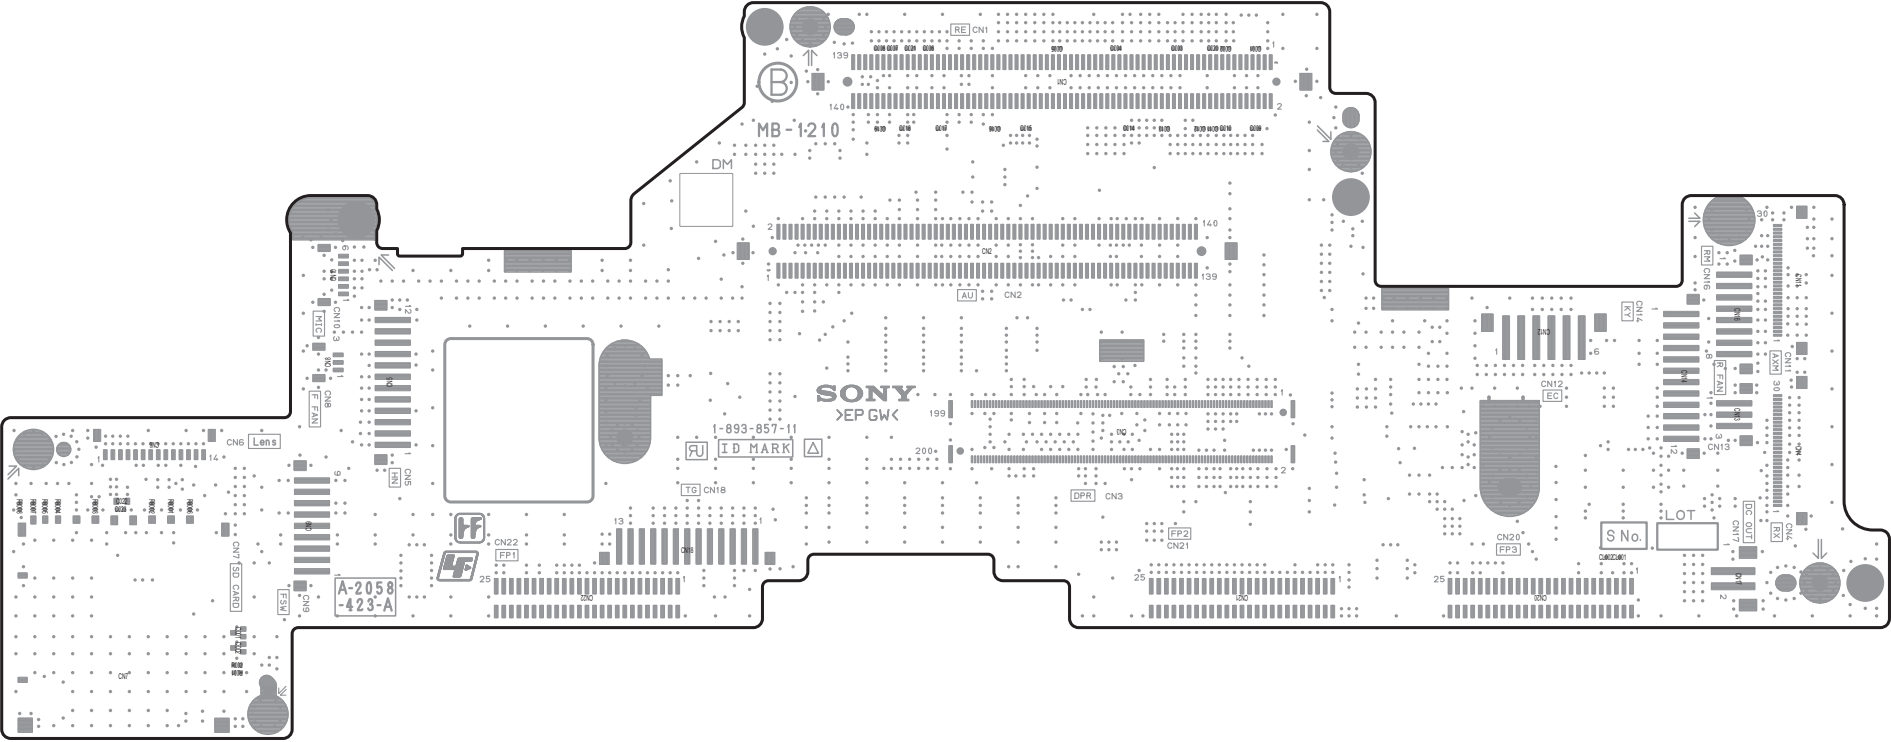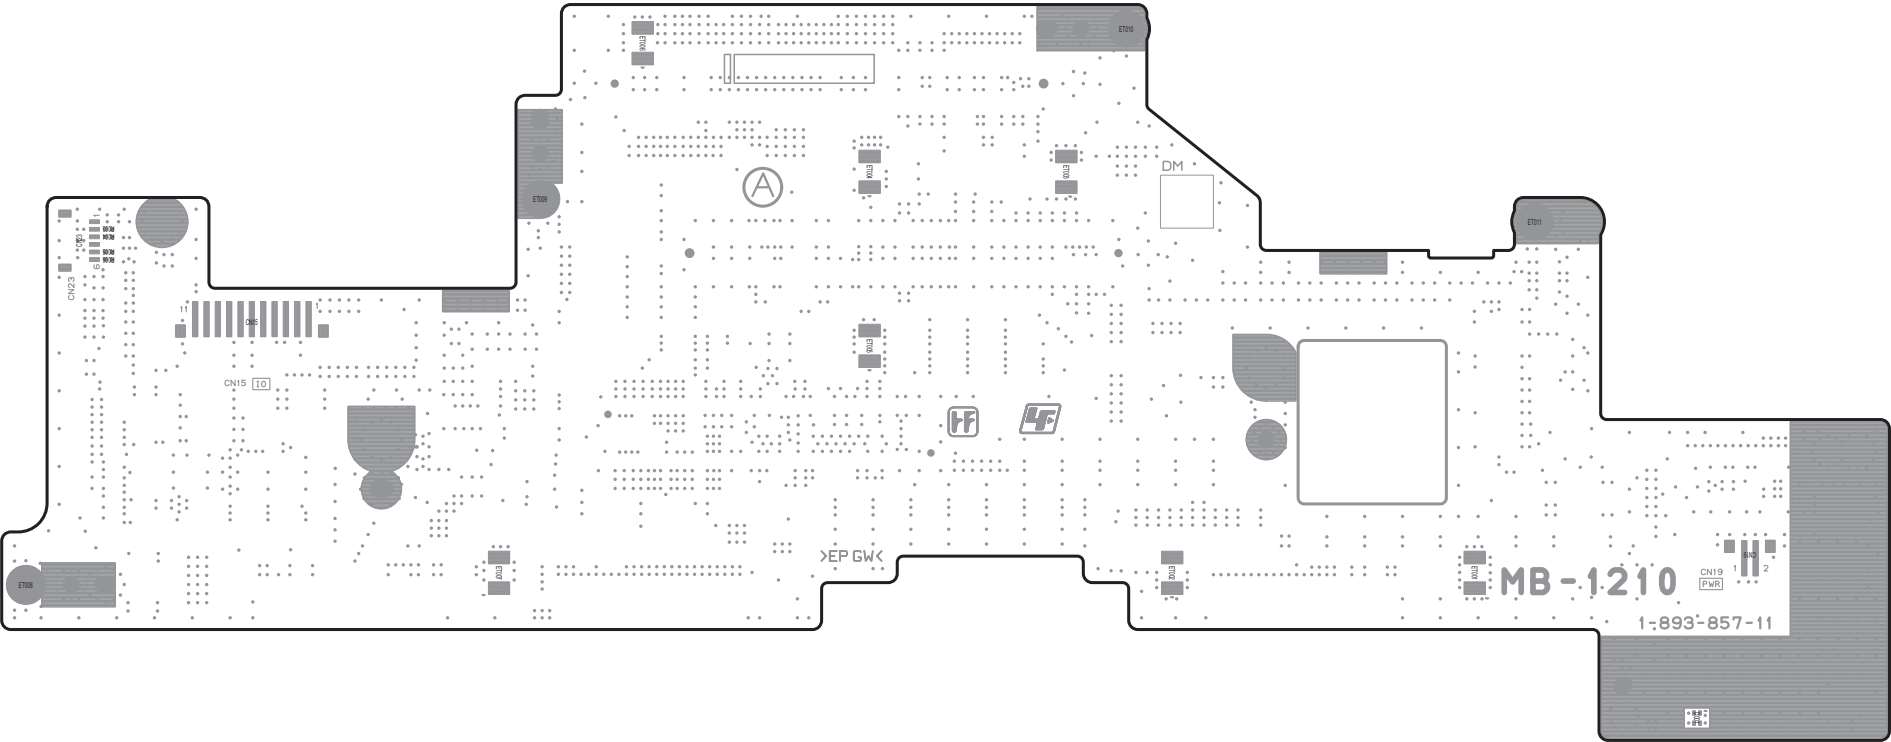

The location is described at the end in this section.



The location is described at the end in this section.




The location is described at the end in this section.




RE-326

The location is described at the end in this section.

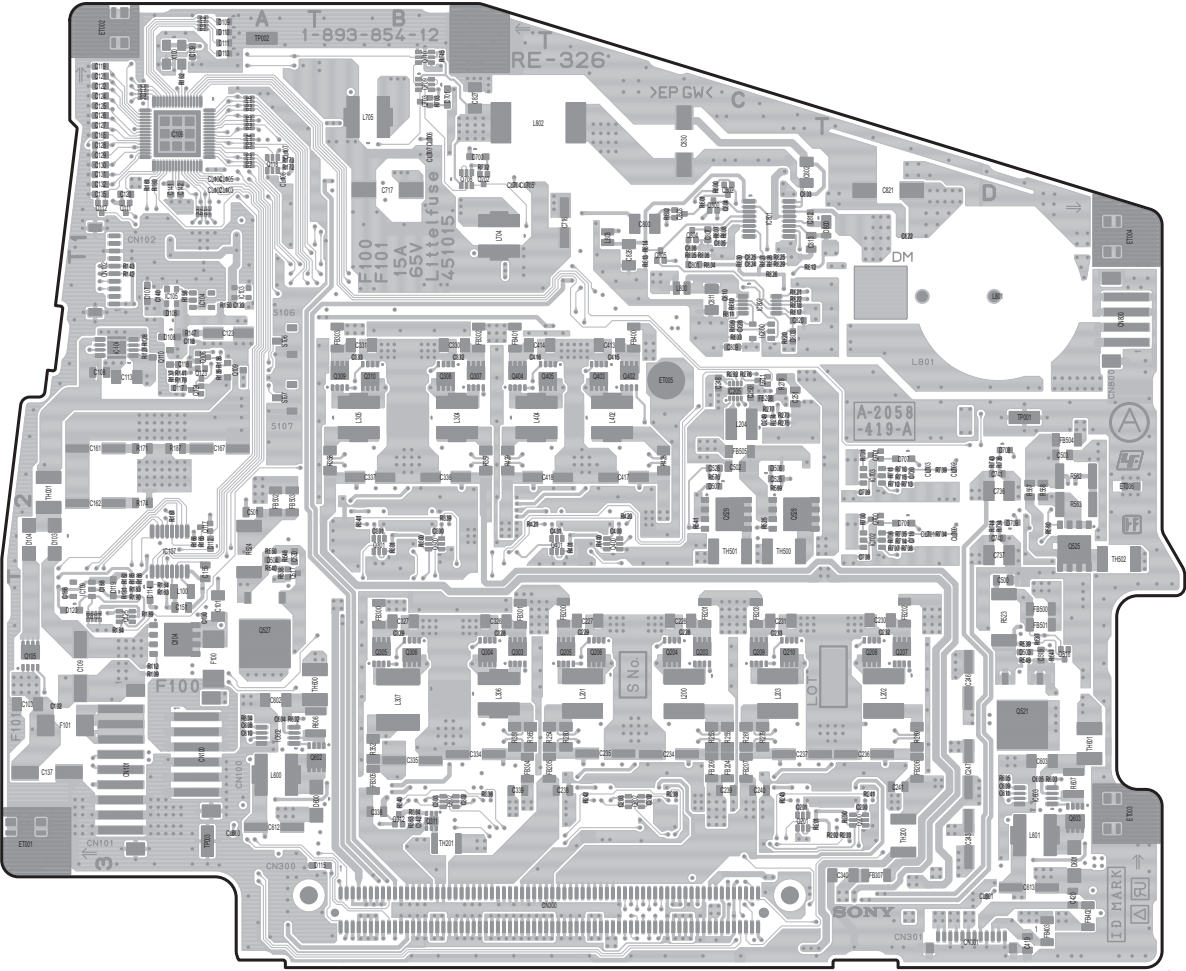


RE-326 -A SIDE-
SUFFIX: -12

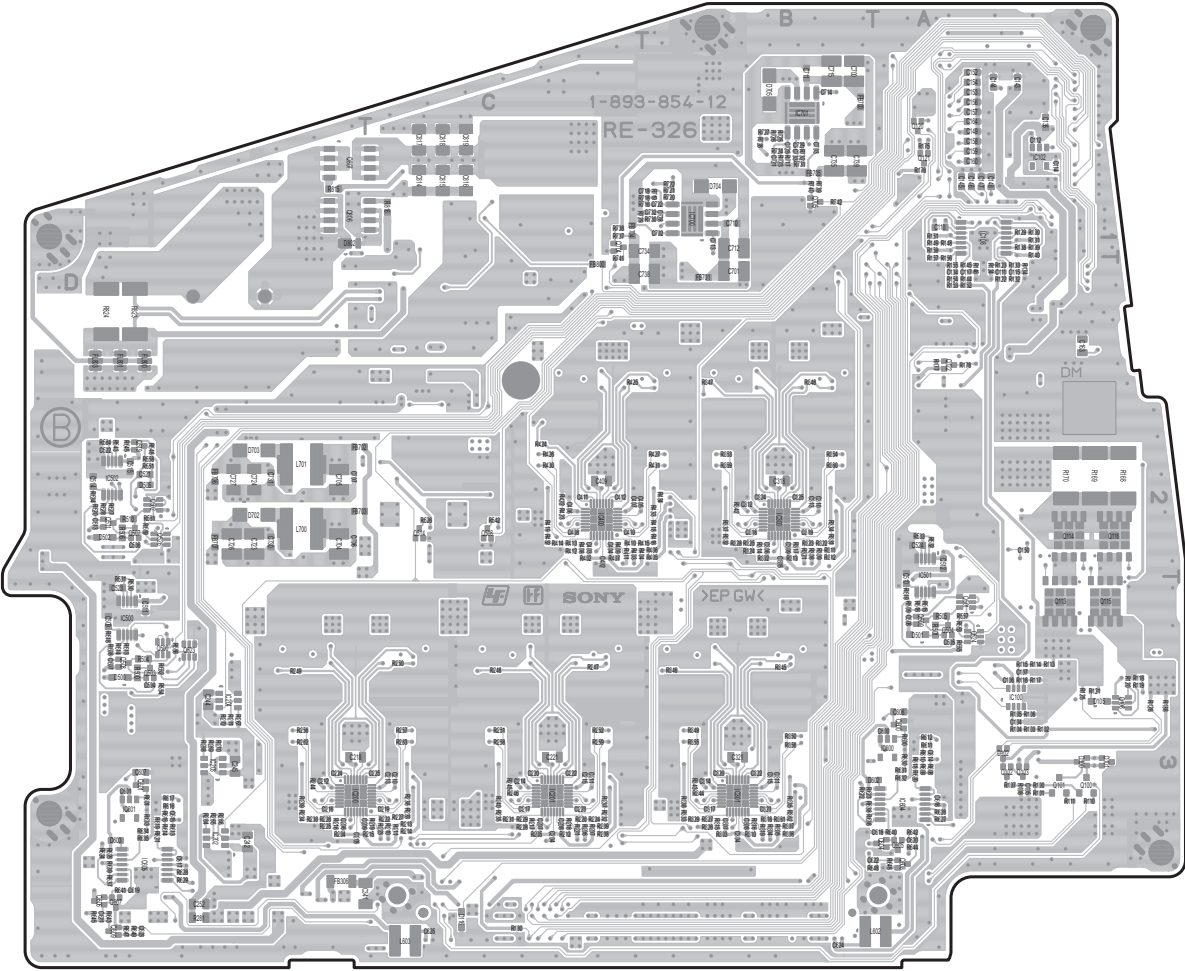


RE-326 -B SIDE-
SUFFIX: -12

RM-246





RM-246 -A SIDE-
SUFFIX: -11




RM-246 -B SIDE-
SUFFIX: -11

RX-136

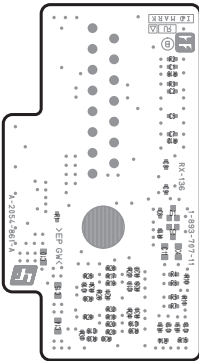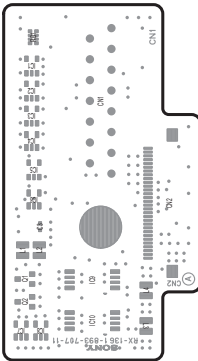

SD-58

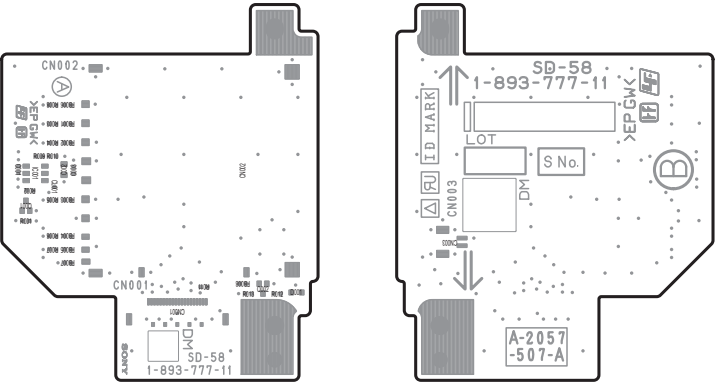

SE-1155




SE-1155 -A SIDE-
SUFFIX: -11

SE-1155 -B SIDE-
SUFFIX: -11

SW-1632

The location is described at the end in this section.

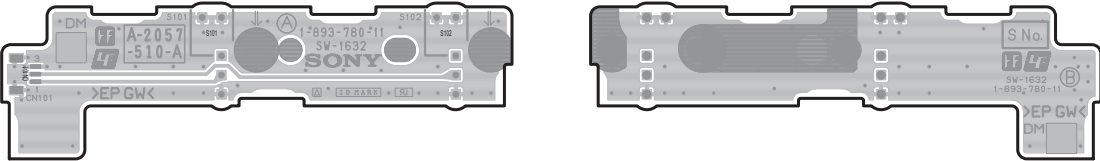


SW-1632 -A SIDE-
SUFFIX: -11

SW-1632 -B SIDE-
SUFFIX: -11

SW-1650

The location is described at the end in this section.

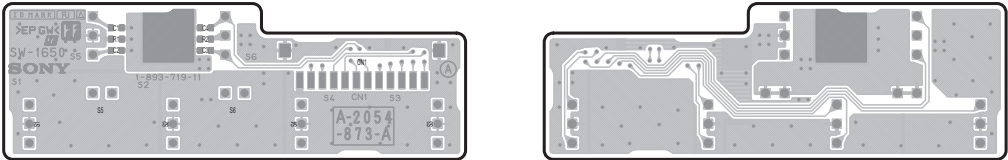


SW-1650 -A SIDE-
SUFFIX: -11

SW-1650 -B SIDE-
SUFFIX: -11

SW-1651


The location is described at the end in this section.

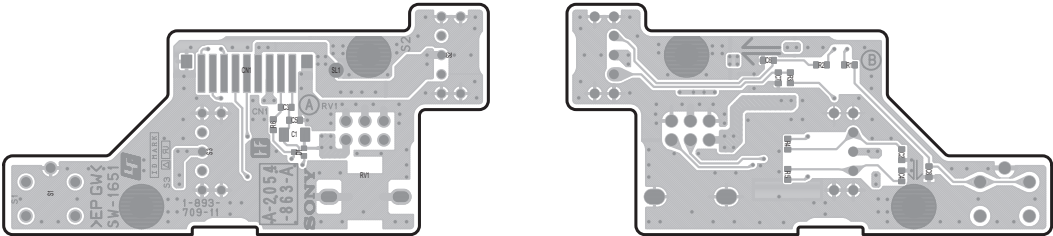

SW-1651 -A SIDE-
SUFFIX: -11

SW-1651 -B SIDE-
SUFFIX: -11

SW-1652

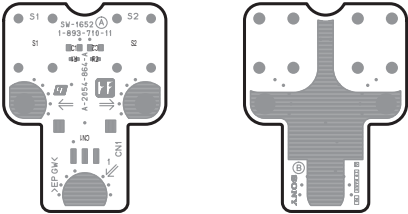

SW-1653

The location is described at the end in this section.




SW-1653 -A SIDE-
SUFFIX: -11

SW-1653 -B SIDE-
SUFFIX: -11

TG-287

The location is described at the end in this section.

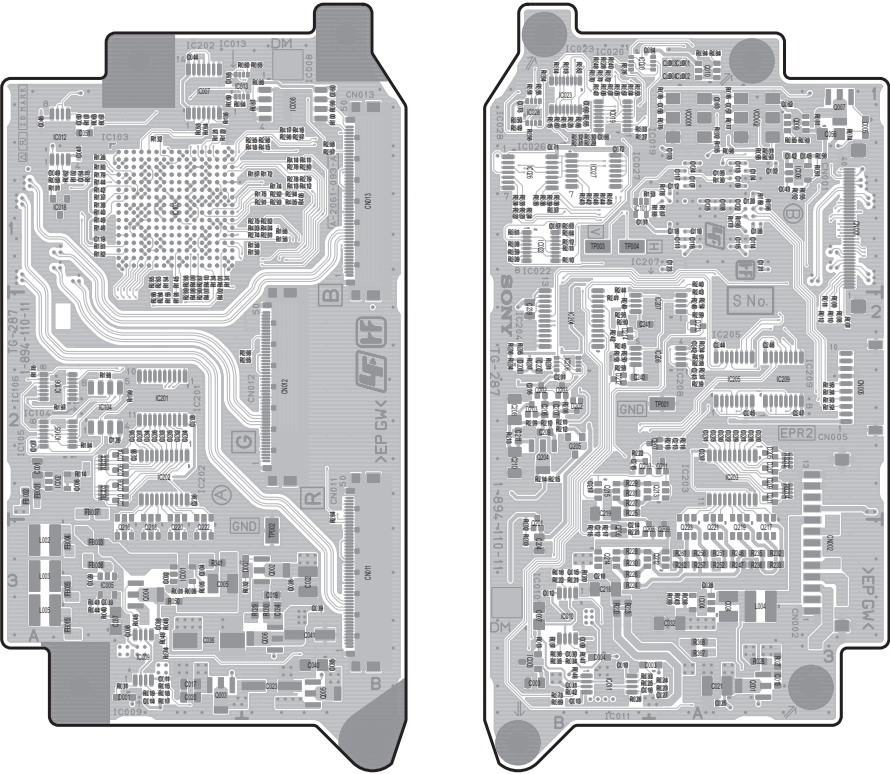

TG-287 -A SIDE-
SUFFIX: -11

TG-287 -B SIDE-
SUFFIX: -11

Board Parts Location

DIF-232 1-894-114-11 *: B SIDE	R031	A1	PA-422 1-894-117-11 *: B SIDE	C071	B1	R009	A2	PA-423 1-894-111-11 *: B SIDE	C071	B2	R009	* A2	PA-424 1-894-112-11 *: B SIDE	C071	B2	R009	* A2	RE-326 1-893-854-12 *: B SIDE	C208	* C3	C335	B3	C701	* B2	CL702	D2	FB300	B3		
	R032	A2		C072	B1	R010	A2		C072	B1	R010	* A2		C072	B1	R010	* A2		C209	* D3	C336	B2	C702	* B1	CL703	D2	FB301	B3		
	R033	A2		C073	* A2	R011	B2		C073	* A2	R011	* B2		C073	* A2	R011	* B2		C210	* C3	C337	B2	C703	* B1	CL704	B1	FB302	B2		
	R034	B2		C074	B1	R012	B2		C074	B2	R012	* B2		C074	B2	R012	* B2		C211	* C3	C338	B3	C704	* D2	CL705	B1	FB303	B2		
	C3	* A1		C100	B1	R013	B1		C075	B2	R013	B1		C075	B2	R013	B1		C212	* D3	C339	B3	C705	* D2	CL706	B1	FB304	B3		
	C5	* A1		R036	* A2	C101	B1		C076	B1	R014	B1		C101	B2	C076	B1		R014	B1	C213	* C3	C340	D3	C706	* D2	CL707	B1	FB305	B3
	C6	* A1		R037	A2	C102	B2		C077	B1	R015	* B2		C102	B2	C077	B1		R015	* B2	C214	* C3	C341	* C3	C707	* D2			FB306	* D3
	C7	* A1		R038	A1	C103	B1		C078	* B1	R016	B2		C103	A2	C078	* B2		R016	* B2	C215	* C3	C342	B3	C708	D2	CN100	A3	FB307	D3
	C8	A2		R039	A1	C104	B1		C079	* B1	R017	B2		C104	A1	C079	* B1		R017	* B2	C216	* D3	C400	C2	C709	D2	CN101	A3	FB400	C2
	C9	* A1		R040	A1				C080	B1	R018	B2				C080	B2		R018	* B2	C217	* C3	C401	C2	C710	* B1	CN102	A2	FB401	B2
	C10	* A1		R041	A1	C001	A1		C081	B1	R019	B2		C001	A1	C081	B1		R019	B2	C218	* D3	C402	* C2	C711	* B1	CN300	C3	FB402	D3
C11	A2	R042	A2	C002	A2	C082	B2	R020	B2	C002	A2	C082	B2	R020	A2	C219	* C3	C403	* C2	C712	* B1	CN301	D3	FB403	D3					
C12	B2	R043	* A1	C003	A1	C083	B1	R021	B1	C003	A1	C083	B2	R021	A2	C220	* C3	C404	* C2	C713	* B1	CN800	D2	FB500	D3					
C13	B2	R044	* A1	C004	A1	C084	B1	R022	B2	C004	A2	C084	B1	R022	B2	C221	* C3	C405	* C2	C714	* B1			FB501	D3					
C14	B2	R045	* A1	C005	A1	C085	* B2	R023	B2	C005	A2	C085	* B2	R023	* B2	C222	* C3	C406	* C2	C715	* B1	D100	* A3	FB502	A2					
		R046	A2	C006	A1	C086	* B1	R024	B2	C006	A2	C086	* B2	R024	B2	C223	* C3	C407	* C2	C716	C1	D101	* A3	FB503	A2					
C015	* A2	R047	* A2	C007	A1	C087	* B2	R025	B2	C007	A1	C087	* B2	R025	B2	C224	* D3	C408	* C2	C717	B1	D102	* A3	FB504	D2					
C016	* A2	R048	* A1	C008	A1	C088	B2	R026	B1	C008	A2	C088	B2	R026	B1	C225	* C3	C409	* C2	C718	* B1	D103	A2	FB505	C2					
C018	* A1	R049	* A1	C009	A2	C089	* B1	R027	B2	C009	A2	C089	* B1	R027	B2	C226	C3	C410	* C2	C719	D2	D104	A2	FB700	* B1					
C019	* A1	R050	* A1	C010	* A2	C090	* B1	R028	B1	C010	* A2	C090	* B1	R028	B2	C227	C3	C411	* C2	C720	D2	D105	* A3	FB701	* B2					
C020	* A2	R051	* A1	C011	A1	C091	* B1	R029	B2	C011	A2	C091	* B1	R029	* B2	C228	C3	C412	* C2	C721	* B1	D106	A2	FB702	* D2					
C021	* A2	R052	* A1	C012	* A2	C092	B1	R030	B2	C012	* A2	C092	B1	R030	* B2	C229	C3	C413	C2	C722	* B1	D107	A2	FB703	* D2					
C022	* A2	R053	* A1	C013	A2	C093	B2	R031	B2	C013	A2	C093	B2	R031	* B2	C230	D3	C414	B2	C723	* D2	D108	A2	FB704	* C1					
C023	* A2	R054	* A1	C014	A2	C094	* B2	R032	B2	C014	A2	C094	* B2	R032	* B2	C231	C3	C415	C2	C724	* D2	D109	A1	FB705	* B1					
C024	* A1	R055	A1	C015	A2	C095	* B2	R033	B2	C015	A2	C095	* B2	R033	B2	C232	D3	C416	B2	C725	* B1	D110	A1	FB706	* D2					
				C016	A2	C096	B1	R034	B1	C016	A2	C096	B1	R034	B2	C233	C3	C417	C2	C726	* D2	D111	A1	FB707	* D2					
CL002	A2			C017	A2	C097	* B1	R035	B2	C017	A1	C097	* B1	R035	B2	C234	C3	C418	C2	C727	* D2	D112	A2	FB800	* C2					
CL003	A2			C018	A2	C098	* B1	R036	B1	C018	A2	C098	* B1	R036	B2	C235	C3	C419	D3	C728	* B1	D113	A1							
CL004	A2			C019	A2	C099	B2	R037	B1	C019	A2	C099	B2	R037	B2	C236	D3	C420	D3	C729	* B1	D114	A3	FL800	* D2					
CL009	A2			C020	A1			R038	B1	C020	A1			R038	B1	C237	C3	C500	D3	C730	* D2	D115	B3	FL801	* D2					
CL010	A2			C021	* B1	CL001	A1	R039	B2	C021	* B1	CL001	A2	R039	B2	C238	C3	C501	A2	C731	* D2	D116	* C3	FL803	* D2					
CL111	A2			C022	B2	CL002	B1	R040	B1	C022	* A2	CL002	B2	R040	B2	C239	C3	C502	C2	C732	* B1	D117	A2							
CL112	A2			C023	B2	CL003	B2	R041	B2	C023	* A2	CL003	B2	R041	B2	C240	C3	C503	D2	C733	* B1	D119	A3	IC100	* A3					
CL113	A2			C024	B2	CL004	B2	R042	B1	C024	A2	CL004	B2	R042	B2	C241	D3	C504	* D3	C734	* B1	D120	A3	IC101	A2					
CL114	A2			C025	B2	CL005	B2	R043	B2	C025	* B2	CL005	B2	R043	B2	C242	* D3	C505	* A3	C735	* B1	D500	* D3	IC102	* A1					
CL115	A2			C026	B2			R044	B1	C026	A2			R044	B2	C243	D3	C506	* D2	C736	D2	D501	* A3	IC103	A2					
CL116	A2			C027	* B1	CN001	A1	R045	B1	C027	* B1	CN001	A2	R045	B2	C244	* D3	C507	* D3	C737	D2	D502	* D2	IC104	A2					
				C028	* B2			R046	B1	C028	* B2			R046	B2	C245	* D3	C508	* A3	C738	* B2	D503	D3	IC105	A2					
CN001	A2			C029	* B2	D001	A2	R047	B1	C029	* B2	D001	* A2	R047	B1	C246	D3	C509	* D3	C739	* B1	D504	A2	IC106	A1					
CN002	B2			C030	* B1	D002	B1	R048	B1	C030	* B1	D002	B1	R048	B1	C247	D3	C510	* A3	C740	D2	D505	* D2	IC107	A2					
				C031	* B1	D003	A2	R049	* A2	C031	* B1	D003	* A2	R049	* A2	C248	C2	C511	* D3	C741	D2	D506	C2	IC108	* A1					
D001	B2			C032	* B1	D004	B2	R050	* A2	C032	* B1	D004	* B2	R050																

L601	D3	Q524	* A3	R150	A2	R242	C3	R344	* B3	R538	A2	R703	B1	S107	A2	TG-287 1-894-110-11 *: B SIDE	C006	A2	D211	* A2	Q222	A3	R218	* A2	R310	* B1	R008	* A2	VCO001 * A1 VCO002 * A1		
L602	* A3	Q525	D2	R151	* A1	R243	C3	R345	* B3	R539	D3	R704	D2				TH001	A2	C007	* B3	D212	* B2	Q223	* A3	R219	* A2	R311	* B1		R009	* A2
L603	* C3	Q526	* D2	R152	* A2	R244	* D3	R346	* B3	R540	A2	R705	D2				TH200	D3	C008	A3	D213	* A2	Q001	* A3	R221	* B3	R313	* B1		R011	* A2
L700	* D2	Q527	A3	R153	* A2	R245	* C3	R347	* B2	R541	C2	R706	D2				TH201	B3	C009	* B3	D214	* B2	Q002	B3	R222	* B2	R314	* B1		R012	* A2
L701	* D2	Q528	C2	R154	* A2	R246	* C3	R348	* B2	R542	* C2	R707	D2				TH500	C2	C010	* B3			Q003	A3	R223	* B3	R315	* B1		R013	* B3
L704	B1	Q529	C2	R155	* A2	R247	* C3	R349	* B3	R543	* D2	R708	D2				TH501	C2	C011	A3	D001	A3	Q004	A3	R224	* B3	R316	* B1		R014	A2
L705	B1	Q600	* A3	R156	* A2	R248	* C3	R350	* B3	R545	* D2	R709	D2				TH502	D2	C012	* B3	D002	B3	Q005	B3	R225	* B2	R322	* B1		R015	A3
L800	C2	Q601	* D3	R157	* A2	R249	* D3	R351	B3	R546	* D2	R710	D2				TH600	B3	C013	* B3	D003	* A3	Q006	B3	R226	* B3	R323	* B1		R016	* B3
L801	D2	Q602	B3	R158	A2	R250	* C3	R352	B3	R547	D3	R711	D2				TH601	D3	C014	A3	D004	* B3	Q007	* A1	R227	* B2	R324	* B1		R017	A3
L802	B1	Q603	D3	R159	* A1	R251	* C3	R353	* B2	R548	A2	R712	D2						C015	* B3	D005	* A1	Q009	* A1	R228	* B3	R325	* B1		R018	A3
L803	C1	Q604	* A3	R160	A1	R252	* C3	R354	* B2	R549	D3	R713	D2	TP001	D2	C016	* B3			Q010	* A1	R229	* B2	R326	* B1	R019	A3				
		Q605	* A3	R161	A1	R253	C3	R355	* B3	R550	A2	R714	D2	TP002	A1	C017	A3	FB001	A2			R230	* B3	R327	* B1	R020	* B3				
Q100	* A3	Q606	* D3	R162	A1	R254	C3	R356	* B3	R551	* D2	R715	D2	TP003	A3	C018	* A3	FB002	A2	R100	B1	R231	* B2	R328	* B1	R021	* B3				
Q101	* A3	Q607	* D3	R163	A3	R255	C3	R357	B2	R552	* D3	R716	* B1	X100	A1	C019	B3	FB003	A3	R101	A1	R232	* A3	R329	* B1	R022	* B3				
Q102	* A3	Q608	* A3	R164	A3	R256	* D3	R358	B2	R553	* A3	R717	* B1			C020	A3	FB004	A3	R102	A1	R233	* A3	R330	* B1	R023	* A3				
Q103	* A3	Q609	* D3	R165	A2	R257	* C3	R359	* B2	R554	* D3	R718	* B1			C021	* A3	FB005	A3	R105	* A1	R234	* A2	R331	* B1	R024	* A3				
Q104	A3	Q700	D2	R166	A2	R258	* C3	R360	* B2	R555	* A3	R719	* B1			C022	B3	FB007	A2	R106	A1	R235	* A3	R332	* B1	R025	* B3				
Q105	A3	Q701	D2	R167	A2	R259	* C3	R361	* B3	R556	* D3	R720	* B1			C023	B3	FB008	A3	R107	A1	R236	* A3	R333	* B1	R026	* B3				
Q106	* A3	Q702	B1	R168	* A2	R260	D3	R362	* B3	R557	* A3	R721	* B1			C024	* A3	FB015	A3	R121	A1	R237	* A2	R334	* B1	R027	* A3				
Q108	A2	Q703	B1	R169	* A2	R261	C3	R363	B3	R558	* D2	R722	* B1			C025	* A3			R122	A1	R238	* A2	R335	* B1	R028	* A3				
Q109	A2	Q704	* C1	R170	* A2	R262	* D3	R364	B3	R559	* D2	R723	* B1			C026	B3	IC001	A3	R126	A1	R239	* A2	R336	* B1	R029	B3				
Q110	A2	Q705	* B1	R171	A2	R263	* C3	R365	B3	R560	D2	R724	* B1			C027	* A3	IC002	A2	R130	* A1	R240	* A1	R337	* B1	R030	B3				
Q111	A1	Q708	B1	R172	A1	R264	* D3	R400	C2	R561	* D2	R725	* B1			C028	* A3	IC003	* B3	R131	A1	R241	* B2	R338	* B1	R031	A3				
Q112	A1	Q709	B1	R173	A1	R265	* D3	R401	C2	R562	D2	R726	* B1	C029	A3	IC004	* A3	R132	A1	R242	* B2	R339	* B1	R032	B3						
Q113	* A3	Q710	B1	R174	A2	R266	* D3	R402	* C2	R563	D2	R727	* B1	C030	* B3	IC005	A3	R134	A1	R243	* A2	R340	* B1	R033	* B3						
Q114	* A2	Q800	C1	R175	* A1	R267	* D3	R403	* C2	R564	* D2	R728	* B1	C031	* B3	IC006	* A1	R137	A1	R244	* B1	R341	A3	R034	* B3						
Q115	* A3	Q802	C1	R176	* A1	R268	* D3	R404	* C2	R567	D2	R729	* C1	C032	* A3	IC007	A1	R138	A1	R245	* B2	R342	* B1	R035	* B3						
Q116	* A2	Q803	C1	R177	* A2	R269	* D3	R405	* B2	R568	D2	R730	* B1	C033	A3	IC008	B1	R140	A1	R246	* A3	R343	* B1	R036	* B3						
Q117	A2	Q804	C1	R178	* A2	R270	* D3	R406	* B2	R569	C2	R731	* B1	C034	B3	IC009	A3	R142	A1	R247	* A3	R344	* B1	R037	* B3						
Q118	A1	Q805	C1	R179	A2	R271	* D3	R407	* C2	R570	C2	R732	* B1	C035	B3	IC010	* B3	R144	A1	R248	* A2	R345	* B1	R038	* A3						
Q120	* A1	Q806	* D1	R180	* C3	R272	* D3	R408	* C2	R600	* A3	R734	D2	C036	A3	IC011	* B3	R145	A1	R249	* B2	R346	* B1	R039	* A3						
Q121	* A1	Q807	* D1	R181	A3	R273	C2	R409	* C2	R601	* D3	R736	D2	C037	A3	IC012	A1	R146	A1	R250	* B2	R347	* B1	R040	A3						
Q122	* A2			R182	A3	R274	C2	R410	* C2	R602	A3	R737	* C1	C038	A3	IC013	A1	R149	A1	R251	* A3	R348	* B1	R041	A3						
Q123	A2	R100	* A3	R183	A3	R275	C2	R411	* C2	R603	D3	R738	* C1	C039	B3	IC018	A1	R150	B1	R252	* A3	R349	* B1	R042	* B3						
Q124	A2	R101	* A3	R184	A3	R276	C2	R412	* C2	R604	A3	R739	* B1	C040	B3	IC019	* B1	R153	* A1	R253	* B2	R350	* B1	R043	* A3						
Q125	A3	R102	* A3	R185	A3	R277	C2	R413	* C2	R605	D3	R740	* B1	C041	B3	IC020	* B1	R154	A1	R254	* A2	R351	* B1	R044	A3						
Q200	D3	R103	* A3	R186	A3	R278	C2	R414	* C2	R606	B3	R741	* C2	C042	* A1	IC022	* B1	R155	A2	R255	* B2	R353	* B1	R045	A3						
Q201	C3	R104	* A3	R187	A2	R279	C3	R415	* B2	R607	D3	R742	* B1	C043	* A1	IC023	* B1	R156	B1	R256	* A3	R354	* B1	R046	* B3						
Q202	C3	R105	* A3	R188	* A3	R280	C3	R416	* B2	R608	* A3	R743	D2	C044	A1	IC026	* B1	R158	B1	R257	* A3	R355	* B1	R047	* B3						
Q203	C3	R106	* A3	R189	A3	R281	* D3	R418	* B2	R609	* A3	R744	D2	C045	* A1	IC027	* B1	R166	B1	R258	* B2	R356	* B1	R048	A3						
Q204	C3	R107	* A3	R190	A3	R282	C2	R419	* C2	R610	* A3	R745	B1	C046	A1	IC028	* B1	R167	B1	R259	* A2	R357	* B1	R049	A3						

