
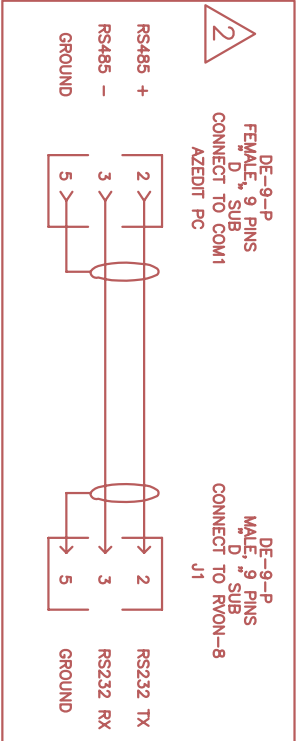
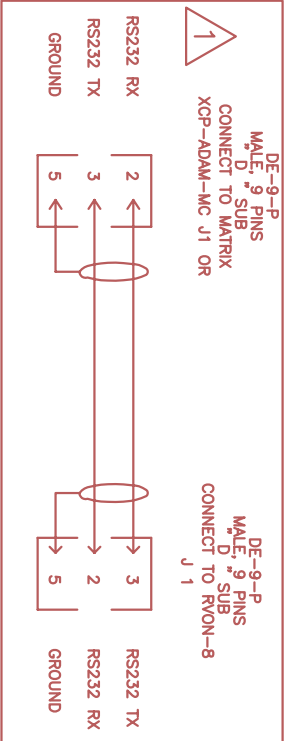


ZONE REV		REVISIONS		DATE	APPROVED
			DESCRIPTION		

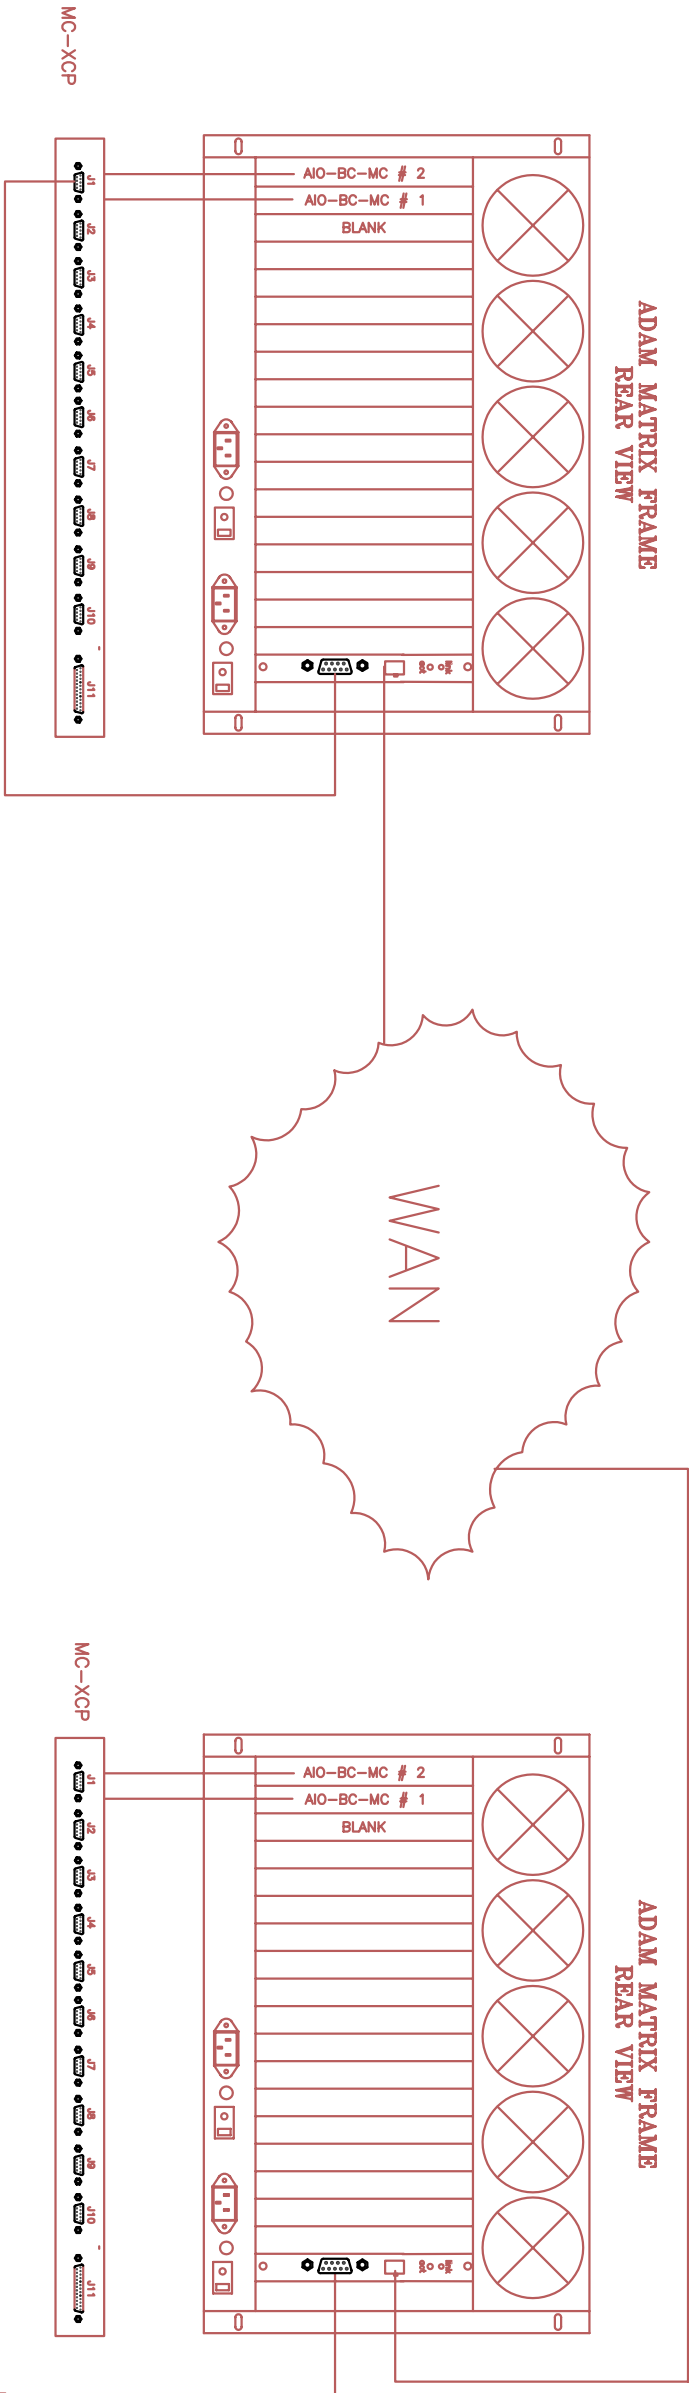

REAR CONNECTOR
CARD OPTION

NOTE:1 RYON JUMPER J10,J11,AND J12
SHOULD BE SET TO PINS 2 AND 3
FOR RS-232 DATA

NOTE:2 SET SW1-6 TO OFF FOR SERIAL
DATA PASS THROUGH

		UNLESS OTHERWISE SPECIFIED REMOVE ALL BURS & BREAK SHARP EDGES HOLE TOLERANCES PER ASME Y14.5-2009 DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS P1/16 .0005 .0010 .0015 .0020 .0030 .0040 .0050 .0060 .0070 .0080 .0090 .0100 .0125 .0150 .0175 .0200 .0250 .0300 .0375 .0450 .0550 .0675 .0800 .1000 .1250 .1500 .1875 .2500 .3125 .3750 .5000 .6250 .7500 .8750 1.0000 1.2500 1.5000 1.7500 2.0000 2.5000 3.0000 3.5000 4.0000 4.5000 5.0000 5.5000 6.0000 6.5000 7.0000 7.5000 8.0000 8.5000 9.0000 9.5000 10.0000		CONTRACT NO.		RTS SYSTEMS BURBANK, CALIFORNIA, USA					
		APPROVALS		DATE		ADAM INTERCOM SYSTEM					
		DRAWN		8 Dec 03		RYON RS232 AZEDIT DATA					
		CHECKED		8 Dec 03		WIRING DETAIL					
		ISSUED				SIZE FROM NO.		DWG NO.		REV	
NEXT ASSY	USED ON	ADAM301C				D				B	
APPLICATION						SCALE NO				SHEET	