SONY

HD CAMERA CONTROL UNIT

HDCU1000
HDCU1080
HDCU1500

SD ENCODER UNIT
HKCU1001

MULTI INTERFACE UNIT
HKCU1003

SDI OUTPUT EXPANSION UNIT
HKCU1005

Digital HDVS

MAINTENANCE MANUAL
1st Edition (Revised 5)
Serial No. 10001 and Higher : HDCU1000 (UC)
Serial No. 30001 and Higher : HDCU1000 (J)
Serial No. 40001 and Higher : HDCU1000 (CE)
Serial No. 50001 and Higher : HDCU1000 (E3)
Serial No. 60001 and Higher : HDCU1000 (E2)
Serial No. 50001 and Higher : HDCU1080 (CN)
Serial No. 10001 and Higher : HDCU1500 (SY)
Serial No. 30001 and Higher : HDCU1500 (J)

⚠警告

このマニュアルは，サービス専用です。
お客様が，このマニュアルに記載された設置や保守，点検，修理などを行うと感電や火災，人身事故につながることがあります。
危険をさけるため，サービストレーニングを受けた技術者のみご使用ください。

⚠ WARNING

This manual is intended for qualified service personnel only.
To reduce the risk of electric shock, fire or injury, do not perform any servicing other than that contained in the operating instructions unless you are qualified to do so. Refer all servicing to qualified service personnel.

⚠ WARNUNG

Die Anleitung ist nur für qualifiziertes Fachpersonal bestimmt.
Alle Wartungsarbeiten dürfen nur von qualifiziertem Fachpersonal ausgeführt werden. Um die Gefahr eines elektrischen Schlages, Feuergefahr und Verletzungen zu vermeiden, sind bei Wartungsarbeiten strikt die Angaben in der Anleitung zu befolgen. Andere als die angegeben Wartungsarbeiten dürfen nur von Personen ausgeführt werden, die eine spezielle Befähigung dazu besitzen.

⚠ AVERTISSEMENT

Ce manual est destiné uniquement aux personnes compétentes en charge de l'entretien. Afin de réduire les risques de décharge électrique, d'incendie ou de blessure n'effectuer que les réparations indiquées dans le mode d'emploi à moins d'être qualifié pour en effectuer d'autres. Pour toute réparation faire appel à une personne compétente uniquement.

Laser Diode Properties
Wavelength : 1310 ±40 nm
Emission duration : Pulse Modulation
Laser output power : 141^{+37}_{-29} µW

CAUTION

Use of controls or adjustments or performance of procedures other than those specified herein may result in hazardous radiation exposure.

CAUTION

The use of optical instruments with this product will increase eye hazard.

CLASS 1 LASER PRODUCT
LASER KLASSE 1 PRODUKT
LUOKAN 1 LASERLAITE
KLASS 1 LASER APPARAT

This camera control unit is classified as a CLASS 1 LASER PRODUCT.

安全のために，周辺機器を接続する際は，過大電圧を持つ可能性があるコネクターを以下のポートに接続しないでください。
：NETWORKコネクター
上記のポートについては本書の指示に従ってください。

For safety, do not connect the connector for peripheral device wiring that might have excessive voltage to the following port(s).
: Ethernet connector
Follow the instructions for the above port(s).

Attention-when the product is installed in Rack:

1. **Prevention against overloading of branch circuit**
   When this product is installed in a rack and is supplied power from an outlet on the rack, please make sure that the rack does not overload the supply circuit.

2. **Providing protective earth**
   When this product is installed in a rack and is supplied power from an outlet on the rack, please confirm that the outlet is provided with a suitable protective earth connection.

3. **Internal air ambient temperature of the rack**
   When this product is installed in a rack, please make sure that the internal air ambient temperature of the rack is within the specified limit of this product.

4. **Prevention against achieving hazardous condition due to uneven mechanical loading**
   When this product is installed in a rack, please make sure that the rack does not achieve hazardous condition due to uneven mechanical loading.

5. **Install the equipment while taking the operating temperature of the equipment into consideration**
   For the operating temperature of the equipment, refer to the specifications of the Operation Manual.

Voor de klanten in Nederland

Gooi de batterij niet weg maar lever deze in als klein chemisch afval (KCA).

Für Kunden in Deutschland

Entsorgungshinweis: Bitte werfen Sie nur entladene Batterien in die Sammelboxen beim Handel oder den Kommunen. Entladen sind Batterien in der Regel dann, wenn das Gerät abschaltet und signalisiert “Batterie leer” oder nach längerer Gebrauchsdauer der Batterien “nicht mehr einwandfrei funktioniert”. Um sicherzugehen, kleben Sie die Batteriepole z.B. mit einem Klebestreifen ab oder geben Sie die Batterien einzeln in einen Plastikbeutel.

For the customers in Taiwan only

廢電池請回收

注意

指定以外の電池に交換すると，破裂する危険があります。
使用済の電池は，説明書に従って処理してください。

CAUTION

Danger of explosion if battery is incorrectly replaced.

Replace only with the same or equivalent type recommended by the manufacturer.
Dispose of used batteries according to the manufacturer's instructions.

Vorsicht!

Explosionsgefahr bei unsachgemäßem Austausch der Batterie.

Ersatz nur durch denselben oder einen vom Hersteller empfohlenen ähnlichen Typ. Entsorgung gebrauchter Batterien nach Angaben des Herstellers.

ATTENTION

Il y a danger d'explosion s'il y a remplacement incorrect de la batterie.

Remplacer uniquement avec une batterie du même type ou d'un type équivalent recommandé par le constructeur.
Mettre au rebut les batteries usagées conformément aux instructions du fabricant.

ADVARSEL!

Lithiumbatteri-Eksplosionsfare ved fejlagtig håndtering.
Udskiftning må kun ske med batteri af samme fabrikat og type.
Levér det brugte batteri tilbage til leverandøren.

ADVARSEL

Lithiumbatteri - Eksplosjonsfare.
Ved utskifting benyttes kun batteri som anbefalt av apparatfabrikanten.
Brukt batteri returneres apparatleverandøren.

VARNING

Explosionsfara vid felaktigt batteribyte.
Använd samma batterityp eller en likvärdig typ som rekommenderas av apparattillverkaren.
Kassera använt batteri enligt gällande föreskrifter.

VAROITUS

Paristo voi räjähtää jos se on virheellisesti asennettu.
Vaihda paristo ainoastaan laitevalmistajan suosittelemaan tyyppiin.
Hävitä käytetty paristo valmistajan ohjeiden mukaisesti.

Table of Contents

Manual Structure

Purpose of this manual ..... 5 (E)
Related manuals ..... 5 (E)

1. Service Overview

1-1. Service Information ..... 1-1 (E)
1-1-1. Tools ..... 1-1 (E)
1-1-2. Cautions when Replacing the Lithium Battery ..... 1-1 (E)
1-2. Notes for Replacing Parts ..... 1-2 (E)
1-2-1. Notes for Replacing the Flexible Card Wire ..... 1-2 (E)
1-2-2. Notes for Replacing the Board ..... 1-3 (E)
1-2-3. Notes for Replacing the Connector on the Board ..... 1-3 (E)
1-2-4. Notes for HDCU1080 ..... 1-3 (E)
1-2-5. Notes for HDCU1000 (E3/E2) ..... 1-3 (E)
1-3. Connecting/Disconnecting the Flexible Card Wire ..... 1-4 (E)
1-4. Writing and Rewriting the PLD Internal Data ..... 1-5 (E)
1-5. Circuit Protection Parts ..... 1-6 (E)
1-6. Circuit Description ..... 1-7 (E)
1-6-1. HDCU1000/1080/1500 Common ..... 1-7 (E)
1-6-2. HDCU1000/1080 ..... 1-8 (E)
1-6-3. HDCU1500 ..... 1-8 (E)
1-6-4. HKCU1001 ..... 1-8 (E)
1-6-5. HKCU1003 ..... 1-9 (E)
1-6-6. HKCU1005 ..... 1-9 (E)
1-7. Notes on Repair Parts ..... 1-10 (E)
1-8. Unleaded Solder ..... 1-10 (E)

2. Replacement of Main Parts

2-1. Replacing the Main Parts (HDCU1000/1080) ..... 2-1 (E)
2-1-1. Replacing the Power Supply Unit (HDCU1000/1080) ..... 2-1 (E)
2-1-2. Replacing the Fuse (HDCU1000/1080) ..... 2-4 (E)
2-1-3. Replacing the DC Fan (HDCU1000/1080) ..... 2-6 (E)
2-1-4. Removing the Rear Panel (HDCU1000/1080) ..... 2-8 (E)
2-1-5. Replacing the SDP-12 Board (HDCU1000/1080) ..... 2-8 (E)
2-1-6. Replacing the MB-1071/1071A Board (HDCU1000/1080) ..... 2-9 (E)
2-1-7. Replacing the CNB-21 Board (HDCU1000/1080) ..... 2-10 (E)
2-2. Replacing the Main Parts (HDCU1500) ..... 2-11 (E)
2-2-1. Replacing the Power Supply Unit (HDCU1500) ..... 2-11 (E)
2-2-2. Replacing the DC Fan (HDCU1500) ..... 2-12 (E)
2-2-3. Replacing the Front Panel (HDCU1500) ..... 2-15 (E)
2-2-4. Removing the Rear Panel (HDCU1500) ..... 2-15 (E)
2-2-5. Replacing the MB-1072 Board (HDCU1500) ..... 2-16 (E)
2-2-6. Replacing the CNB-22 Board (HDCU1500) ..... 2-17 (E)
2-2-7. Replacing the SDP-12 Board (HDCU1500) ..... 2-17 (E)

3. Electrical Alignment

3-1. Preparation ..... 3-1 (E)
3-1-1. Required Equipment ..... 3-1 (E)
3-1-2. Notes on Adjustments ..... 3-1 (E)
3-1-3. Connection of Equipment ..... 3-2 (E)
3-1-4. Initialization Settings ..... 3-3 (E)
3-2. Audio System Adjustment ..... 3-4 (E)
3-2-1. Microphone Level Adjustment ..... 3-4 (E)
3-2-2. RTS Intercom Adjustment ..... 3-5 (E)
3-3. Video and Reference Signal System Adjustment ..... 3-6 (E)
3-3-1. 27 MHz VCO Free-run Adjustment ..... 3-6 (E)
3-3-2. Clock (74 MHz) Duty Adjustment ..... 3-6 (E)
3-3-3. Prompter 1/2 Level Adjustment ..... 3-7 (E)
3-4. Video Signal System Adjustment (Front board) ..... 3-7 (E)
3-4-1. SD-SDI Input VCO Free-run Adjustment ..... 3-7 (E)
3-4-2. STAIR CASE Adjustment ..... 3-8 (E)
3-5. SD Signal System Adjustment ..... 3-8 (E)
3-5-1. VBS Output Level Adjustment ..... 3-8 (E)
3-5-2. PIX Output Level Adjustment ..... 3-9 (E)
3-5-3. WF Output Level Adjustment ..... 3-9 (E)
3-5-4. GRB Output Level Adjustment ..... 3-10 (E)
3-5-5. Y/R-Y/B-Y Output Level Adjustment ..... 3-11 (E)

4. Spare Parts

4-1. Notes on Repair Parts 4-1
4-2. Exploded Views 4-2
4-3. Electrical Parts List 4-19
4-4. Packing Materials & Supplied Accessories 4-206
4-5. Optional Fixtures List 4-206

5. Semiconductor Pin Assignments

6. Block Diagrams

Overall (HDCU1000) 6-2
Overall (HDCU1080) 6-4
Overall (HDCU1500) 6-6
AT-167 6-8
AU-302 6-10
AU-303 6-10
AVP-6 6-11
DRX-5 6-12
DTX-5 6-13
EN-159A 6-14
EN-159B 6-14
HIF-25 6-15
HIF-26 6-15
HIF-27 6-15
SDI-85 6-15
CN-2674 6-16
SDI-86 6-16
CN-2675 6-17
SDI-87 6-17
SDP-12 6-18
VDA-64A 6-19
VDA-64B 6-19
VDA-64C 6-19
VIF-34 6-20
VIF-34B 6-20
CN-3275 6-21
PS-780 6-21
PS-781 6-21
RE-276 6-21
PS-778 6-22
RE-274 6-22

7. Schematic Diagrams

ADO-10 7-2
AT-167 7-3
AU-302 7-13
AU-303G 7-16
AU-303 7-18
AVP-6 7-19
CN-2672 7-27
CN-2673 7-28
CN-2674 7-28
CN-2675 7-29
CN-2676 7-30
CN-2677 7-30
CN-2718 7-30
CN-2805 7-30
CN-2678 7-31
CN-2700 7-31
CN-3275 7-32
CNB-21 7-34
CNB-22 7-36
DRX-5 7-37
DTX-5 7-48
DU-390 7-55
DU-565 7-56
EN-159A 7-57
EN-159B 7-65
HIF-25 7-73
HIF-26 7-74
HIF-27 7-75
MB-1071 7-76
MB-1071A 7-76
MB-1072 7-80
PS-778 7-84
PS-780 7-87
PS-781 7-89
RE-274 7-90
RE-276 7-93
SDI-85 7-96
SDI-86 7-97
SDI-87 7-98

SDI-87G 7-98
SDP-12 7-99
VDA-64A 7-110
VDA-64B 7-111
VDA-64C 7-112
VIF-34B 7-113
VIF-34 7-117
Frame Wiring (HDCU1000) 7-120
Frame Wiring (HDCU1080) 7-122
Frame Wiring (HDCU1500) 7-124

8. Board Layouts

AT-167 8-2
AU-302 8-5
AU-303 8-6
AU-303G 8-7
AVP-6 8-8
CN-2672 8-10
CN-2673 8-10
CN-2674 8-10
CN-2675 8-10
CN-2676 8-10
CN-2677 8-10
CN-2678 8-11
CN-2700 8-11
CN-2718 8-11
CN-2805 8-11
CNB-21 8-11
DRX-5 8-12
DTX-5 8-14
EN-159A 8-16
EN-159B 8-16
CNB-22 8-18
HIF-25 8-18
HIF-26 8-19
HIF-27 8-19
MB-1071 8-20
MB-1071A 8-20
MB-1072 8-21
SDI-85 8-21
SDI-86 8-22
SDI-87 8-23
SDI-87G ..... 8-23 (a)
SDP-12 8-24
VDA-64A 8-26
VDA-64B 8-26
VDA-64C 8-26
VIF-34 8-27
VIF-34B 8-27
ADO-10 8-28
DU-390 8-28
CN-3275 8-29
DU-565 8-29
PS-778 8-30
PS-780 8-32
PS-781 8-35
RE-274 8-36
RE-276 8-38

Manual Structure

Purpose of this manual

This manual is the maintenance manual of the following models :

HD Camera Control Unit	HDCU1000/HDCU1080/HDCU1500
SD Encoder Unit	HKCU1001
Multi Interface Unit	HKCU1003
SDI Output Expansion Unit	HKCU1005

This manual intended for use by trained system and service engineers describes (service overview and the circuit overview, the main part replacements, electrical alignment, parts list, semiconductor pin assignments, block diagrams, schematic diagrams, board layouts.) required for parts-level service.

Related manuals

Beside this Installation Manual, the following manuals are available for the unit.

- **Operation Manual (Supplied with HDCU1000/1500)**
  This manual describes how to operate the HDCU1000/1500.

- **Operation Manual (Supplied with HDCU1080)**
  This manual describes how to operate the HDCU1080.

- **Installation Manual (Available on request)**
  This manual is intended for use by trained system and service engineers, and describes the information regarding the installation of the unit and the information that premises the service based on components replacement.
  For obtaining, contact your local Sony Sales Office/Service Center.
  Part number : 9-968-207-0X

- **“Semiconductor Pin Assignments” CD-ROM (Available on request)**
  This “Semiconductor Pin Assignments” CD-ROM allows you to search for semiconductors used in Broadcast and Professional equipment.
  This manual contains a complete list of semiconductors and their ID Nos., and thus should be used together with the CD-ROM.
  Part number: 9-968-546-0X

Section 1
Service Overview

1-1. Service Information

1-1-1. Tools

Sony P/N	Name
A-1153-700-A	Extension board EX-982*1
A-1153-701-A	Extension board EX-983*2
A-1153-715-A	Extension board EX-984*3
J-6480-010-A	Alignment sleeve*4
	Remover HC-001
J-7120-140-A	PLD download tool*5
–	Cotton swab*6

*1 : Extension board for front plug-in board
*2 : Extension board for rear plug-in board
*3 : Extension board for SDP-12 board
*4 : For female optical connector
*5 : PLD data download cable
*6 : Commercially available
For cleaning optical contact block (4 mm or less in diameter)

1-1-2. Cautions when Replacing the Lithium Battery

The lithium battery is installed on the AT-167 board. This lithium battery is used to back up the real-time clock (RTC). RTC stops operating when the battery life expires. Replace the battery and reset DATE/TIME on the C12 DATE page in the configuration menu. (refer to Installation Manual Section 3 “Menu Settings”.)

AT-167 board/CR2032: Sony part number (1-528-174-11)

CAUTION

Ensure that the battery is installed with + and – poles connected to the correct terminals. An incorrect connection may cause an explosion or leakage of fluid.

1-2. Notes for Replacing Parts

There are two kinds of types (gold and silver) in the parts below used in this unit.
- Flexible card wires
- Boards
- Connectors on the board (for flexible card wires)

When replacing the parts above, be sure to follow the instructions described in "1-2-1. Notes for Replacing the Flexible Card Wire", "1-2-2. Notes for Replacing the Board", and "1-2-3. Notes for Replacing the Connector on the Board".
Be sure to use the specified parts. Using un-specified parts causes the change in the characteristics of this unit and the unit does not work properly.
Spare parts are listed in the spare parts list of "Spare Parts" Section. In the spare parts list, (GOLD) or (SILVER) is put after each part name to distinguish two kinds of types (gold and silver).

1-2-1. Notes for Replacing the Flexible Card Wire

When replacing the flexible card wires listed below, confirm the conductive (terminal) part color of the flexible card wires and follow the procedure below.

1. Replace the flexible card wire with a flexible card wire whose conductive part is gold when the conductive part of a flexible card wire is gold.
   Note
   For the board on which a connector whose contact surface is gold is used, "G" is put after the board name by silk-screen printing or a "G" seal is attached to the empty space on the board. Example: AU-303G

2. Replace the flexible card wire with a flexible card wire whose conductive part is silver when the conductive part of a flexible card wire is silver. In this case, silk "G" or a "G" seal is not put on the board name.

When the conductive part is gold
HDCU1000 (UC/J/CE)

Board	Flexible card wire		Board
	Pin	Gold : Parts No.	
CNB-21G	50	1-831-087-11	ADO-10G
CNB-21G	50	1-831-087-11	VIF-34G
CNB-21G	50	1-831-087-11	VIF-34G
CNB-21G	50	1-831-664-11	CN-2672G
CN-2805G	15	1-831-666-11	CN-2672G
SDI-86G	15	1-831-666-11	CN-2674G

When the conductive part is silver
HDCU1000 (UC/J/CE)

Board	Flexible card wire		Board
	Pin	Silver : Parts No.	
CNB-21	50	1-830-799-11	ADO-10
CNB-21	50	1-830-799-11	VIF-34
CNB-21	50	1-830-799-11	VIF-34
CNB-21	50	1-830-798-11	CN-2672
CN-2805	15	1-830-801-11	CN-2672
SDI-86	15	1-830-801-11	CN-2674

When the conductive part is gold
HDCU1500 (SY/J)

Board	Flexible card wire		Board
	Pin	Gold : Parts No.	
AU-303G	45	1-831-665-11	MB-1072G
CNB-22G	50	1-831-087-11	ADO-10G
CNB-22G	50	1-831-087-11	VIF-34BG
CNB-22G	50	1-831-664-11	CN-2675G
CN-2677G	15	1-831-666-11	CN-2675G
SDI-87G	15	1-831-666-11	CN-2675G

When the conductive part is silver
HDCU1500 (SY/J)

Board	Flexible card wire		Board
	Pin	Silver : Parts No.	
AU-303	45	1-830-800-11	MB-1072
CNB-22	50	1-830-799-11	ADO-10
CNB-22	50	1-830-799-11	VIF-34B
CNB-22	50	1-830-798-11	CN-2675
CN-2677	15	1-830-801-11	CN-2675
SDI-87	15	1-830-801-11	CN-2675

1-2-2. Notes for Replacing the Board

Replace the board with a board of the same number as the spare part number of the board to be removed when replacing a board.
Example: A spare part number is put on the board.

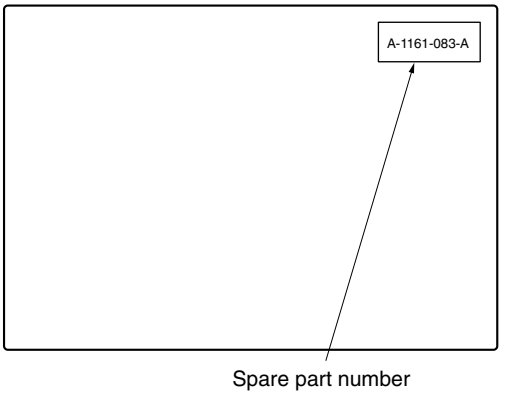

A spare part number is put on side A or B of the board by silk-screen printing or a spare part code label (spare part number) is attached on side A or B.

1-2-3. Notes for Replacing the Connector on the Board

There are two types of connectors for the flexible card wire mounted on the board used in this unit. Distinguish them in the procedure below when replacing these connectors.

1. The contact surface of the connector used for a board is gold when the conductive part of a flexible card wire is gold.
   In a spare parts list, (GOLD) is put after the part name.
2. The contact surface of the connector used for a board is silver when the conductive part of a flexible card wire is silver.
   In a spare parts list, (SILVER) is put after the part name.

1-2-4. Notes for HDCU1080

The conductive part of the flexible card wires used in the HDCU1080 is gold only.
If the flexible card wires need to be replaced, use the parts listed below.
Also, for the board on which a connector whose contact surface is gold is used, “G” is put after the board name by silk-screen printing or a “G” seal is attached to the empty space on the board. Example: SDI-86G

When the conductive part is gold HDCU1080 (CN)

Board	Flexible card wire		Board
	Pin	Gold : Parts No.	
CNB-21G	50	1-831-087-11	ADO-10G
CNB-21G	50	1-831-087-11	VIF-34G
CNB-21G	50	1-831-087-11	VIF-34G
CNB-21G	50	1-831-664-11	CN-2672G
CN-2805G	15	1-831-666-11	CN-2672G
SDI-86G	15	1-831-666-11	CN-2674G

1-2-5. Notes for HDCU1000 (E3/E2)

The conductive part of the flexible card wires used in the HDCU1000 (E3/E2) is gold only.
If the flexible card wires need to be replaced, use the parts listed below.
Also, for the board on which a connector whose contact surface is gold is used, “G” is put after the board name by silk-screen printing or a “G” seal is attached to the empty space on the board. Example: SDI-86G

When the conductive part is gold HDCU1000 (E3/E2)

Board	Flexible card wire		Board
	Pin	Gold : Parts No.	
CNB-21G	50	1-831-087-11	ADO-10G
CNB-21G	50	1-831-087-11	VIF-34G
CNB-21G	50	1-831-087-11	VIF-34G
CNB-21G	50	1-831-664-11	CN-2672G
CN-2805G	15	1-831-666-11	CN-2672G
SDI-86G	15	1-831-666-11	CN-2674G

1-3. Connecting/Disconnecting the Flexible Card Wire

The flexible card wires are used to connect between the following boards. Life of flexible card wire will be significantly shortened if it is bent. Be very careful not to bend the flexible card wire.
Three types of different-shaped connectors are used in HDCU1000/1080/1500. (Type A to type C)
Because the direction of the flexible card wire is different depending on the shape of the connector, be careful when connecting the flexible card wire.

Disconnecting

1. Turn off the power.
2. Slide or raise the portion A in the direction of the arrow to unlock and pull out the flexible card wire.

Connecting

Notes

- Do not insert the flexible card wire sideways.
- Confirm that there is no stain or dust on the contact surface of the flexible card wire.

1. Slide or raise the portion A in the direction of the arrow and securely insert the flexible card wire into the deep end of the connector.
2. Return the portion A to its original position and lock the connector.

Note

When connecting the flexible card wire, check the connector shape, and great care should be taken for the direction of the contact surface or isolation surface (blue).
(Refer to illustration of the type A to type C.)

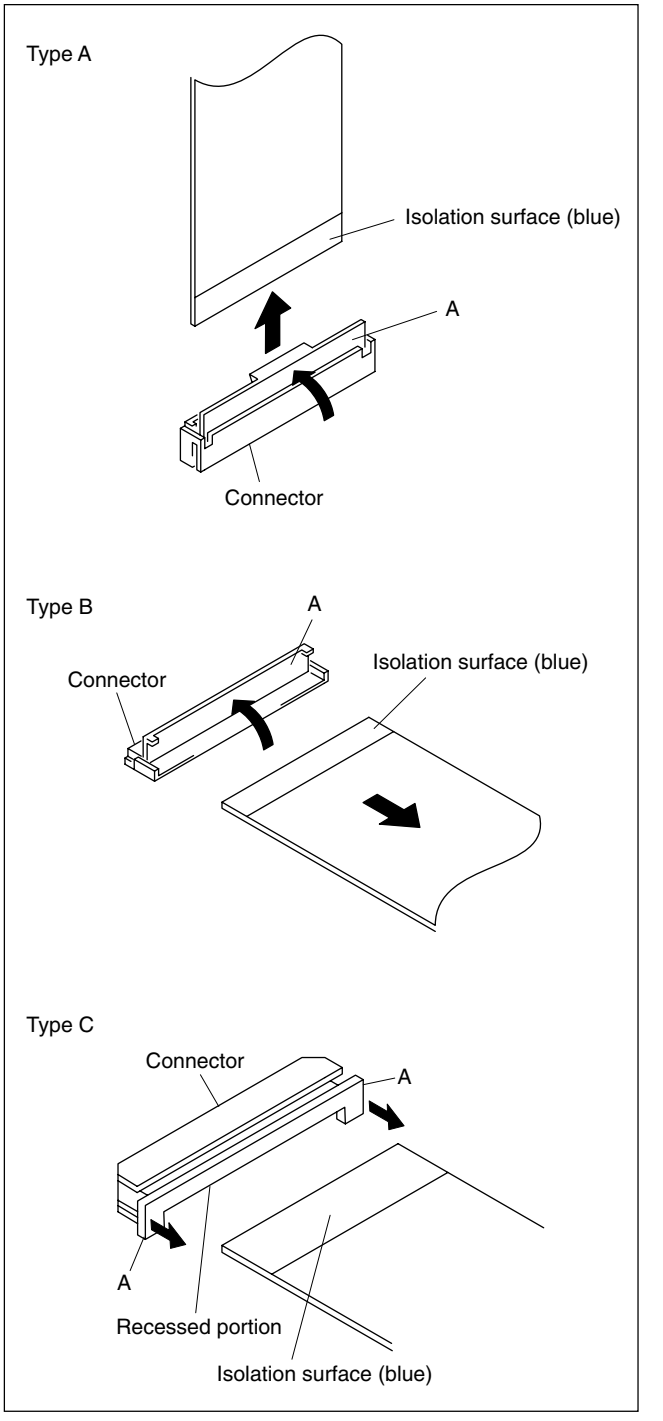

1-4. Writing and Rewriting the PLD Internal Data

HDCU1000/1080/1500 uses the PLD (Programmable Logic Device) that supports the e-Production (EPR) system to write and rewrite the internal data.
If the parts listed below needs to be replaced or if PLD needs to be upgraded, contact your local Sony Sales Office/Service Center.

Note

The part number of PLD (or ROM for PLD) in which data is not written yet, is shown in " Spare Parts".
Therefore, if part replacement is required, write the data by the following procedure.
In the case of the PLD type that runs on the program stored in external ROM, the PLD has only to be replaced and data needs not to be written only if the specific PLD is defective.

e-Production system has the advantages shown below.

- To write/rewrite the PLD internal data:
  1. The standard fixture (cable) can be used.
  2. The standard software (PLD Download Tool) can be used.
- The PLD internal data is controlled in the Sony Database Server under the name Project file (E_xxx_xxx_xx_xx).
- The printed circuit board is equipped with the standard connector (EPR connector) to write the PLD internal data. The indication "EPR" is shown on the printed circuit board.

Corresponding PLDs

Board name PLD/ROM	EPR connector	Project file No.
AT-167 IC601*1, IC603	CN601	E_000_001_93_xx
AVP-6 IC302, IC310*2	CN3	E_000_001_94_xx
DTX-5 IC401, IC505*3, IC506*3	CN501	E_000_001_95_xx
DRX-5 IC211, IC213*4, IC214*4, IC215*4	CN3	E_000_001_96_xx
SDP-12*7 IC208, IC409, IC416*5	CN402	E_000_001_97_xx
EN-159A/159B (HKCU1001/1003) IC210, IC501, IC502*6, IC504*6	CN501	E_000_001_98_xx

*1 : IC601/AT-167 is a ROM for IC603/AT-167.
*2 : IC310/AVP-6 is a ROM for IC302/AVP-6.
*3 : IC505, IC506/DTX-5 is a ROM for IC401/DTX-5.
*4 : IC213, IC214, IC215/DRX-5 is a ROM for IC211/DRX-5.
*5 : IC416/SDP-12 is a ROM for IC208, IC409/SDP-12.
*6 : IC502, IC504/EN-159A/159B is a ROM for IC210, IC501/EN-159A/159B.
*7 : The data in the PLD of the SDP-12 board can also be written or rewritten via the AVP-6 board. Turn on switch S4-8 on the AVP-6 board.

Note

After having written or rewritten the data in the PLD of the SDP-12 board via the AVP-6 board, turn off switch S4-8 on the AVP-6 board.

Equipment required

- PLD download tool (Sony part number : J-7120-140-A)
  The cable to connect PC to HDCU1000/1080/1500.
- PC
  A PC having parallel port.
  A PC in which the PLD Download Tool software is already installed.
  For the applicable OS and the operating environment, refer to "Download Tool Operating Instruction for Device Programming".

Data writing procedure

Data writing procedure in the PLD (or ROM for PLD) is outlined below.
For details of data writing procedure, refer to "Download Tool Operating Instruction for Device Programming", which is available in the same site where the PLD Download Tool software is available.

Step 1 Prepare the Project file.

Note

Download the Project file from the Sony Database Server.

Step 2 Turn off the power of HDCU1000/1080/1500. Connect the PC parallel port to the EPR connector of the target board using the PLD download tool (cable).

Step 3 Turn on the power of HDCU1000/1080/1500. Start the PLD Download Tool software and read the Project file.

Step 4 Program the PLD (or ROM for PLD) with the PLD Download Tool software.

Step 5 Upon completion of programming, check that error message is not displayed. Turn off the power of HDCU1000/1080/1500 and back on.

1-5. Circuit Protection Parts

Thermistors

HDCU1000/1080/1500 is provided with positive thermistors for power circuit. If an overcurrent flows in a positive thermistor or it heats up to a certain degree with the increase of the ambient temperature, its internal resistance increases sharply to limit the current flowing in the circuit. When a thermistor is activated, turn off the power and check the circuit of the unit. After the cause of the problem is removed and the device cools down, turn on the power again. The unit will work normally. It takes about one minute for the device to cool down.

Board name	Ref. No.	Address	Sony P/N
AT-167	THP1	H1 (A side)	⚠ 1-533-817-21
	THP2	H1 (A side)	⚠ 1-533-817-21
	THP3	C1 (A side)	⚠ 1-804-458-21
	THP4	C2 (A side)	⚠ 1-804-458-21
	THP101	C3 (A side)	⚠ 1-803-353-21
AVP-6	THP100	H4 (A side)	⚠ 1-803-615-21
	THP101	H4 (A side)	⚠ 1-803-615-21
	THP102	H2 (A side)	⚠ 1-804-616-21
	THP103	H2 (A side)	⚠ 1-804-458-21
	THP104	H3 (A side)	⚠ 1-804-616-21
	THP105	H3 (A side)	⚠ 1-804-616-21
	THP106	H2 (A side)	⚠ 1-804-616-21
DRX-5	THP1	G1 (A side)	⚠ 1-533-817-21
	THP2	G1 (A side)	⚠ 1-533-817-21
	THP3	H1 (A side)	⚠ 1-533-817-21
	THP4	H1 (A side)	⚠ 1-533-817-21
	THP5	D4 (A side)	⚠ 1-533-817-21
	THP6	D1 (A side)	⚠ 1-533-817-21
	THP7	B4 (A side)	⚠ 1-533-817-21
DTX-5	THP101	B1 (A side)	⚠ 1-533-817-21
	THP102	E1 (A side)	⚠ 1-533-817-21
	THP103	E1 (A side)	⚠ 1-533-817-21
	THP104	D1 (A side)	⚠ 1-533-817-21
	THP105	D1 (A side)	⚠ 1-533-817-21
	THP106	C1 (A side)	⚠ 1-533-817-21
VIF-34/34B	THP1	A2 (B side)	⚠ 1-804-458-21
	THP2	A2 (B side)	⚠ 1-804-458-21
	THP3	C1 (B side)	⚠ 1-803-615-21
	THP4	A2 (B side)	⚠ 1-803-615-21
	THP5	A2 (B side)	⚠ 1-803-615-21
	THP6	A1 (A side)	⚠ 1-804-458-21
EN-159A/ 159B	THP101	B4 (A side)	⚠ 1-533-817-21
	THP102	C4 (A side)	⚠ 1-533-817-21
	THP103	H4 (A side)	⚠ 1-533-817-21
	THP104	J1 (A side)	⚠ 1-533-817-21
	THP105	H5 (A side)	⚠ 1-533-817-21
	THP106	H4 (A side)	⚠ 1-803-615-11
	THP107	H4 (A side)	⚠ 1-803-615-11

1-6. Circuit Description

1-6-1. HDCU1000/1080/1500 Common

Front Boards

AT-167 board

The AT-167 board has the built-in microprocessor (SH2-DSP). It controls various circuit boards inside the HDCU1000/1080/1500 and the power supply. It also performs the system setup including a camera.
The board performs command communication with a camera, and with RCP, MSU, or CNU.
Also, it enables Ethernet connection by the Ethernet controller with the built-in microprocessor.
In addition, when the optional remote control unit (RM-B750) is installed in the front panel of the HDCU1500, it performs the command communication with the RM-B750.
It has the built-in signal generator circuit generating HD and SD. This signal generator circuit establishes gen-lock with external (main) reference and also gen-lock between HD and SD. It controls phase of all video signal outputs.
It has the sync output of one channel enabling to switch between the HD ternary value sync signal and the SD sync signal.

AVP-6 board

The AVP-6 board processes the audio signal, tally, and trunk line. It has the following functions.

- D/A-converts and outputs the MIC signals supplied from the camera in digital format.
- A/D converts the intercom signals (ENG/PROD/PGM/Front-Intercom) input to the HDCU1000/1080/1500.
- Inputs the intercom signals sent from the camera in digital format and the A/D-converted audio signals of the HDCU1000/1080/1500 to the digital mix IC, and performs line selection, mixing, and volume control.
- D/A converts the signals processed at the digital mix IC, and outputs it to external circuits.
- R/G tally signal I/F
- Trunk line (RS-232C/422A) I/F

DTX-5 board

The DTX-5 board processes the return signals and the prompter signals.
This board can handle the HD-SDI/SD-SDI/VBS signals as return signals, and convert them to the specified signals and send them back to the camera.

- Phase adjustment is performed on the HD-SDI signal.
- The SD-SDI signal is up-converted to the pseudo-HD signal and its signal phase is adjusted.
- The VBS signal is converted to the digital signal equivalent to the SD-Digital-Component signal, and processed in the same way as the SD-SDI signal. The signal also has the Frame conversion function and performs reverse conversion (from 60 i to 24 PsF) according to the main-line system.

The signal input as a prompter is A/D-converted, embedded to the return signal and then sent to the camera.

DRX-5 board

The DRX-5 board processes the main-line signals from the camera.

- Phase adjustment and re-clocking using line memory
- Frame conversion (2-3 Pull Down) function as necessary
- Down-conversion function as necessary
- Has the built-in HD/SD signal color bar generator and supports multiple formats
- Matches the MIC signal from the camera to the delay of the video signal, and then multiplexes it to the SDI signal.
- Analog character output

Rear boards

SDP-12 board

The SDP-12 board processes the main-line signals sent from the camera and the return signals to the camera. The board converts the main-line light serial signal sent from the camera from light to electricity and from the serial to parallel signal.
Then, it separates the digital audio signal and the commands multiplexed to the main line, and sends the main-line video signal to the DRX-5 board, the digital audio signal to the AVP-6 board, and commands to the AT-167 board.
Also, the return video signal is sent from the DTX-5 board, the digital audio signal from the AVP-6 board, and commands from the AT-167 board. The board then multiplexes the digital audio signal and the commands to the return video signal. The return signal is then converted from the parallel to serial signal, and electricity to light, and sent to the camera as the light serial signal.

VIF-34 board

I/F board that connects each connector on the rear panel

- I/F of MIC REMOTE, WFM REMOTE, and I/O PORT of the D-Sub 15 pin connector
- SYNC output, CHARACTER output
- Retains serial numbers in EEPROM.

ADO-10 board

Relay board between the AVP-6 board and the rear panel connector

- INCOM/MIC/PGM
- TRUNK LINE
- AES/EBU

1-6-2. HDCU1000/1080

Front Board

AU-302 board

The AU-302 board is an interface to the front INCOM connector, and has the intercom control switch and indicators.

Rear boards

HIF-25 board/HIF-26 board

The HIF-25 board and the HIF-26 board have the co-axial connector for outputting the HD/SD-SDI signals to external devices.
The board outputs two systems of the main-line system HD/SD-SDI signal sent from the DRX-5 board, and outputs two systems of the monitor-system HD/SD-SDI signal.

SDI-85 board

The SDI-85 board inputs the return signals of HD-SDI from external devices.
The board has four systems of the return input of the HD-SDI signal, which are selected and then sent to the DTX-5 board.

SDI-86 board

The SDI-86 board mainly inputs the return signals of SD-SDI from external devices and the composite analog return signals.
The board has four systems of the return input of the SD-SDI signal, which are selected and then sent to the DTX-5 board. Apart from that, it has four systems of the return input of the composite analog signal from the CN-2674 board, which are selected and then sent to the DTX-5 board. It also has two systems of the amplifier for the prompter signal from the CN-2674 board that is amplified and then sent to the DTX-5 board.

1-6-3. HDCU1500

Front board

AU-303 board

The AU-303 board is an interface to the front INCOM connector, and has the intercom control switch, indicators, and power supply switch.
Also, when using the optional remote control unit (RM-B750) by connecting it to the front panel of the HDCU1500, the AU-303 board functions as the interface with the RM-B750.

Rear boards

HIF-27 board

The HIF-27 board has the co-axial connector for outputting the HD/SD-SDI signals to external devices.
It outputs two systems of the main-line system HD/SD-SDI signals sent from the DRX-5 board, and outputs one system of the monitor-system HD/SD-SDI signals.

SDI-87 board

The SDI-87 board mainly inputs the return signals from external devices.
The board has the three systems of return input that can connect the HD-SDI signal, the SD-SDI signal, and the composite analog signal, specifies format for each system, selects the system and then sends it to the DTX-5 board. Also, it has two systems of amplifier for the prompter signal from the CN-2675 board that amplifies the signal and the signal is sent to the DTX-5 board.

1-6-4. HKCU1001

The HKCU1001 only supports the basic functions of VBS_OUT, PIX_OUT, and WFM_OUT.

Front board

EN-159A board

The EN-159A board receives 8:4:4 component digital signal from the front side (DRX-5 board), and outputs the main-line system SD analog composite signals (VBS, PIX, and WFM signals). The board is equipped with the external synchronous circuit of the reference SC (sub carrier) of SD, and the composite signal whose external SC is locked can be output. There also is a through-path of the 8:4:4 component digital signal to the rear part (EN-159B board).

Rear board

VDA-64A board
The VDA-64A board outputs the SD analog signals (VBS, PIX, and WFM signals) to external devices.

1-6-5. HKCU1003

In addition to the functions of the HKCU1001, the HKCU1003 supports full functions including COMPONENT_OUT, and SUB_REF.

Front board

EN-159B board

In addition to the functions of the EN-159A board, the EN-159B board receives the 8:4:4 component digital signal from the front side (DRX-5 board or EN-159A board), and outputs the SD analog component signal. Also, it outputs the panel display signals (analog R, G, B signals and V, H timing signals) when the RM-B750 is installed to the front side of the HDCU1500.
Other than that, the board is equipped with the synchronous circuit of the sub reference signal, and the output of the staircase signal for the WFM sequential display.

Rear boards

VDA-64A board

Same as the HKCU1001.
Insert this board to the rear side of the slot that has the EN-159B board inserted in its front side. The VDA-64A and 64B boards cannot be inserted simultaneously.

VDA-64B board

The VDA-64B board is used to output the SD analog signals (PIX, WFM signals), and to input or output Frame_Reference to external devices.
Insert this board to the rear side of the slot that has the EN-159B board inserted in its front side. The VDA-64A and 64B boards cannot be inserted simultaneously.

VDA-64C board

The VDA-64C board outputs the SD analog signals (VBS, component signals) to external devices.
Insert this board into the slot next (signal downstream) to the one whose front side has the EN-159B board. The front side of the slot should not have any board inserted.

1-6-6. HKCU1005

Front boards

DRX-5 board

Same as the DRX-5 board common to HDCU1000/1080/1500.

HIF-26 board

The HIF-26 board has the co-axial connector for outputting the HD/SD-SDI signals to external devices.
It outputs two systems of the main-line system HD/SD-SDI signals sent from the DRX-5 board in the optional slot, and outputs two systems of the monitor-system HD/SD-SDI signals.

1-7. Notes on Repair Parts

1. Safety Related Components Warning

WARNING

Components marked ⚠ are critical to safe operation. Therefore, specified parts should be used in the case of replacement.

2. Standardization of Parts

Some repair parts supplied by Sony differ from those used for the unit. These are because of parts commonality and improvement.
Parts list has the present standardized repair parts.

3. Stock of Parts

Parts marked with "o" at SP (Supply Code) column of the spare parts list may not be stocked. Therefore, the delivery date will be delayed.

4. Harness

Harnesses with no part number are not registered as spare parts.

1-8. Unleaded Solder

Boards requiring use of unleaded solder are printed with a lead free mark (LF) indicating the solder contains no lead. (Caution: Some printed circuit boards may not come printed with the lead free mark due to their particular size.)

: LEAD FREE MARK

Notes

- Be sure to use the unleaded solder for the printed circuit board printed with the lead free mark.
- The unleaded solder melts at a temperature about 40 °C higher than the ordinary solder, therefore, it is recommended to use the soldering iron having a temperature regulator.
- The ordinary soldering iron can be used but the iron tip has to be applied to the solder joint for a slightly longer time. The printed pattern (copper foil) may peel away if the heated tip is applied for too long, so be careful.

Section 2
Replacement of Main Parts

2-1. Replacing the Main Parts (HDCU1000/1080)

Be sure to perform the following operation when replacing or removing the main parts.

- Turn off the main power and disconnect the plug from the outlet.

Note

Wait for at least three minutes before starting replacement, because even after turning off the power, a high voltage remains in the machine that could cause electric shock.

2-1-1. Replacing the Power Supply Unit (HDCU1000/1080)

WARNING

The components marked ⚠ are critical to safe operation. If you replace with parts other than the specified ones, a fire or electric shock may result from that.

CAUTION

When repairing or replacing the power supply block, set the voltage. If the voltage is set incorrectly, a fire or electric shock may result from that.

- When repairing or replacing the power supply block, set to the same power supply voltage as that of repair work bench.
- When delivering to the user, adjust the power supply voltage to suit the user.

Two types of power supply units are installed in this unit, and parts replacement and voltage selector setting are different for each type.
This section describes replacement method for the following items.

- Switching regulator (1-468-945-11)
- Power block assembly (A10) (A-1768-444-A)
- When the switching regulator has been replaced with a power block assembly (A10)

Gently remove or attach the power supply unit holding it by hand.
Otherwise, the power supply unit may fall, causing an injury.

Switching Regulator (1-468-945-11)

Replacement Part

Part : Switching regulator
Part No. : ⚠1-468-945-11

1. Remove the front panel.
2. Remove the four screws and remove the flexible card wire from the connector J8.
3. Remove the PS panel assembly.

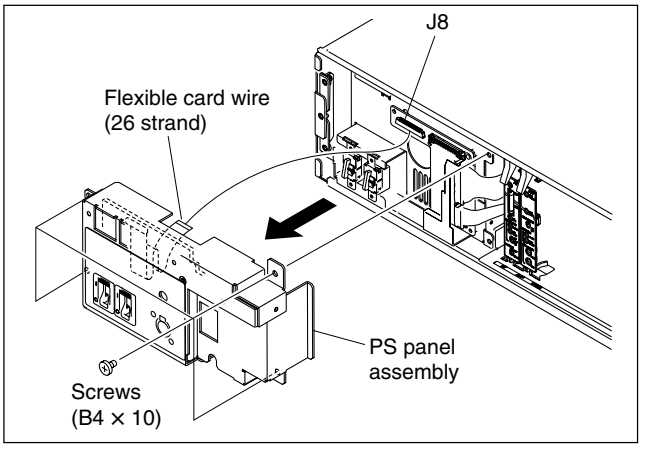

4. Disconnect the harnesses from the switching regulator board connectors J5, J6, and J7.
5. Remove the switching regulator from HDCU1000/1080 in the direction of the arrow.

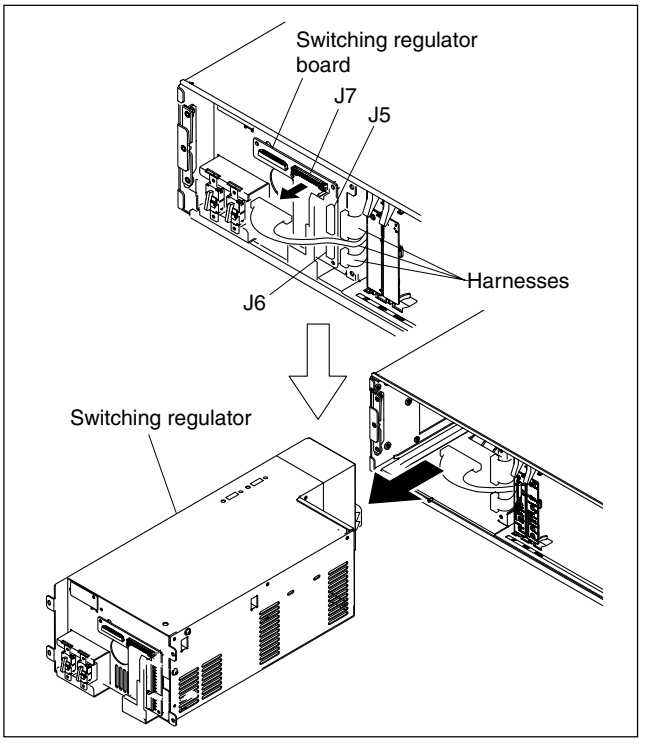

6. Set the two voltage selectors on the new switching regulator to the settings shown in the diagram.

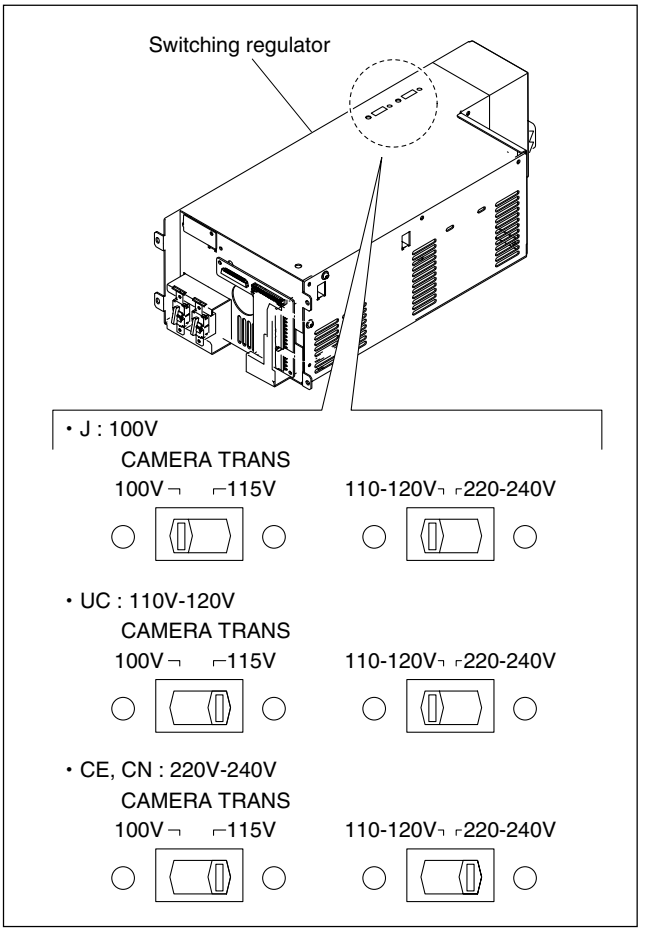

7. Confirm if the CAMERA fuse of the replacement power supply unit adapts to the working power supply voltage. If not, replace it with the one adapting to the working power supply voltage.
(Refer to Section 2-1-2.)

Note

If the rating of the fuse doesn't adapt to the working power supply voltage, the safety can not be ensured. So, the CAMERA fuse needs to be replaced with the one adapting to the working power supply voltage.

8. Install the power supply unit by reversing the steps of removal.

Power Block Assembly (A10) (A-1768-444-A)

Replacement Part

Part: Power block assembly (A10)
Part No. : ⚠A-1768-444-A

Replacement Procedure

1. Remove the front panel.
2. Remove the four screws and remove the flexible card wire from the CN9003 on the CN-3275 board.
3. Remove the PS panel assembly.

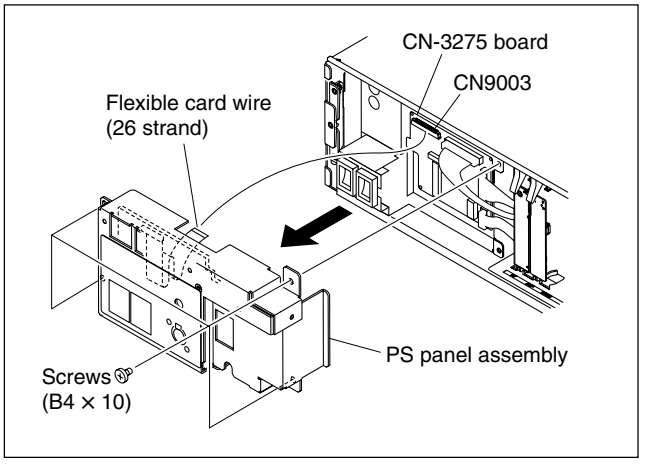

4. Remove the harnesses from the CN9002, CN9006 and CN9007 on the CN-3275 board.
5. Remove the power block assembly (A10) from HDCU1000/1080 in the direction of the arrow.

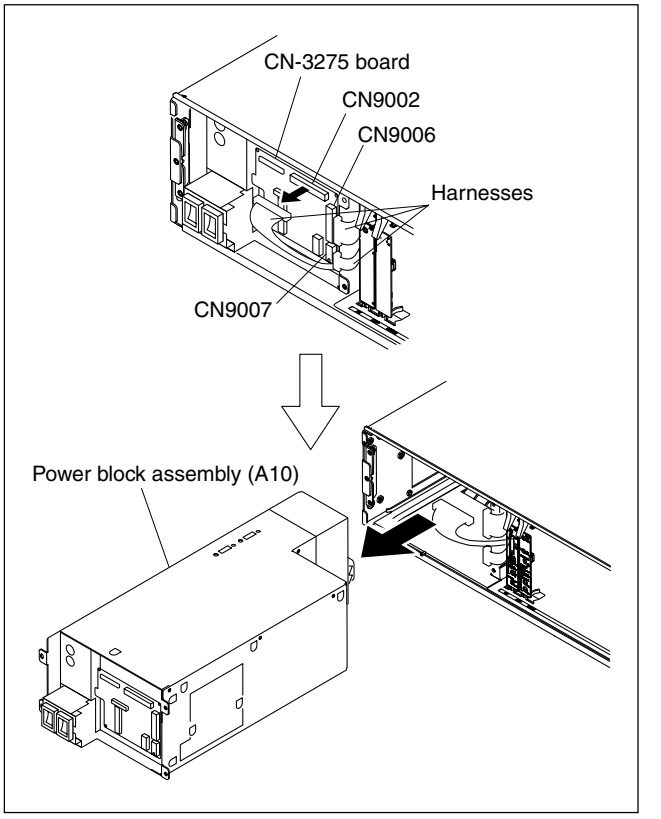

6. Set the two voltage selectors on the new power block assembly (A10) to the setting show in the diagram.

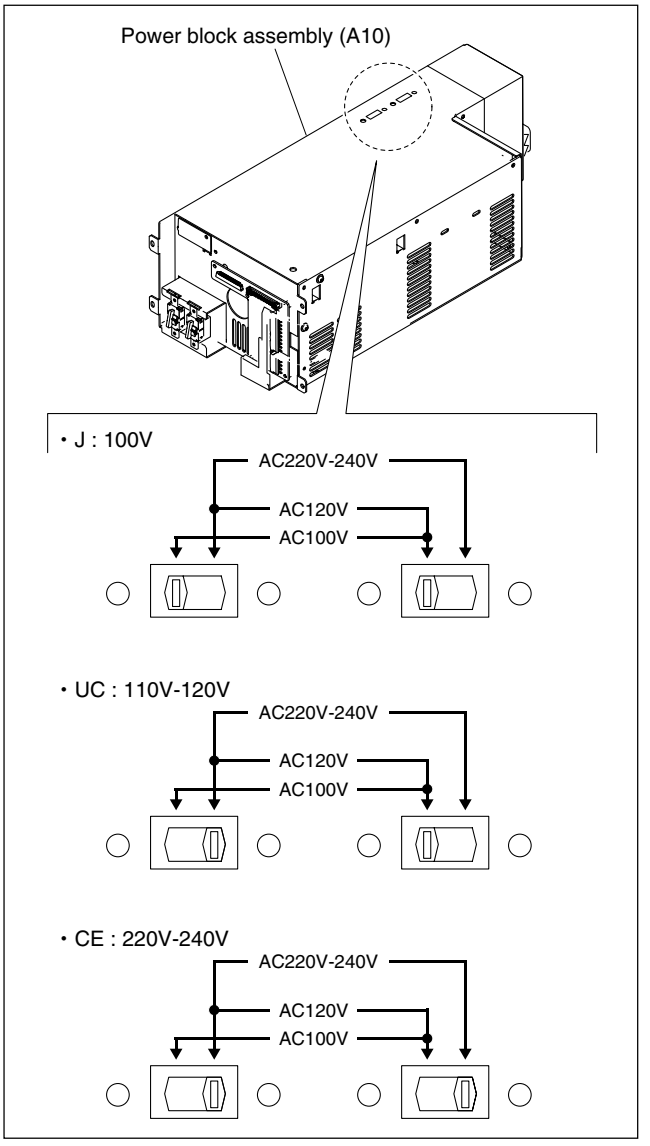

7. Confirm if the CAMERA fuse of the replacement power adapts to the working power supply voltage. If not, replace it with the one adapting to the working power supply voltage. (Refer to Section 2-1-2.)

Note

If the rating of the fuse doesn't adapt to the working power supply voltage.

8. Install the power supply unit by reversing the steps of removal.

When the switching regulator has been replaced with a power block assembly (A10)

When the switching regulator (1-468-945-11) has been replaced with a power block assembly (A10) (A-1768-444-A), replace the PS panel assembly and the protection sheet (AU-302) with those for the power block assembly (A10), and then replace the power supply unit referring to "Switching Regulator (1-468-945-11)" and "Power Block Assembly (A10) (A-1768-444-A)."

Replacement Parts

Part: PS panel assembly (for power block assembly (A10))
Part No.: X-2548-735-1
Part: Protection sheet (AU-302) (for power block assembly (A10)
Part No.: 3-986-514-02

Replacement Procedure

1. Disconnect the harness from the connector CN2 on the CN-2700 board of the PS panel assembly.
2. Remove the four screws (B3 × 5) and remove the AU-302 board from the PS panel assembly.
3. Remove the two screws (P2.6 × 5) and remove the CN-2700 board from the PS panel assembly.
4. Remove the two rivets to detach the protection sheet (AU-302) from the AU-302 board.

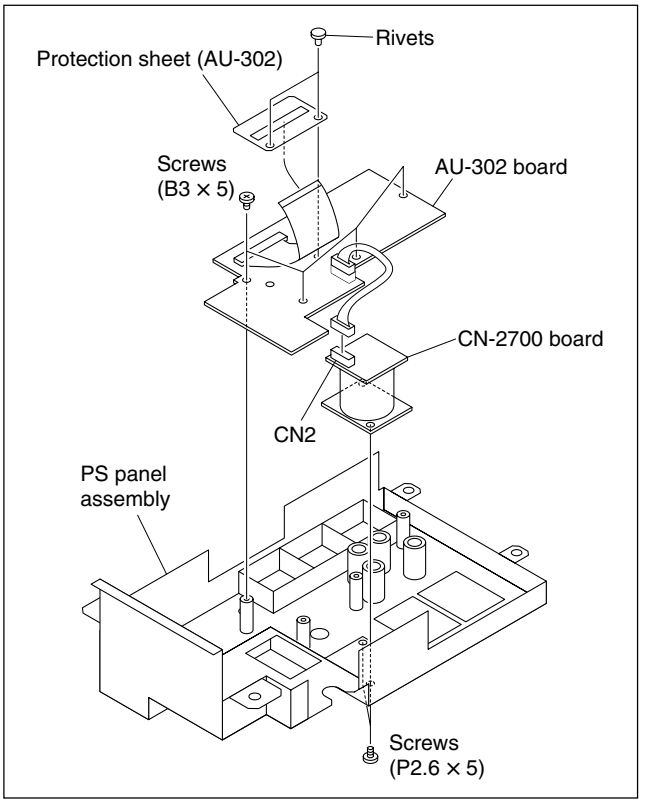

5. Install the CN-2700 board and the AU-302 board to the PS panel assembly (X-2548-735-1) by reversing steps 1 to 3.
6. Pass the protection sheet (AU-302) (3-986-514-02) through the flexible card wire as shown in the figure and secure it with the two rivets removed in step 4.

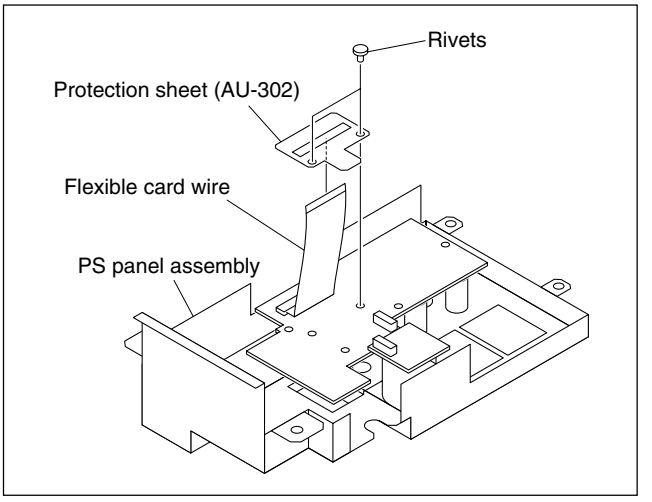

7. Push the ferrite core of the harness against the protection sheet (AU-302) (3-986-514-02) as shown in the figure.

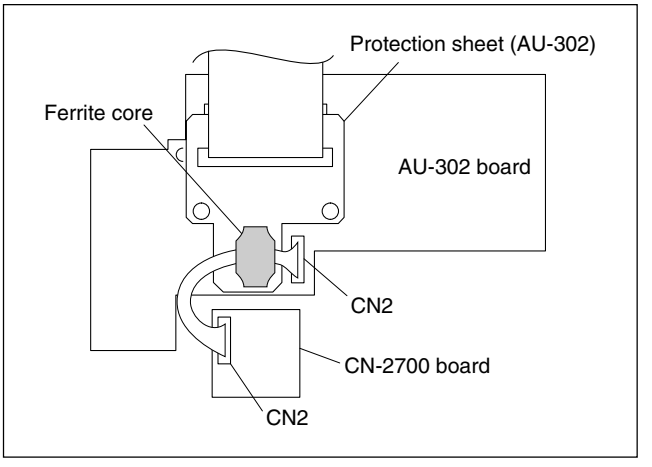

8. Install the PS panel assembly to the unit.

2-1-2. Replacing the Fuse (HDCU1000/1080)

WARNING

The components marked ⚠ are critical to safe operation. If you replace with parts other than the specified ones, a fire or electric shock may result from that.

Replacement Part

MAIN fuse

Part : Fuse (3.15 A, 250 V)
Part No. : ⚠ 1-576-230-51

CAMERA fuse

Note

Different types of camera fuses are used in the switching regulator and the power block assembly (A10) as a power supply unit.
Use the following specified fuses.

- Switching regulator (1-468-945-11)
  For 100 to 120 V setting
  Part: Fuse (6.3 A, 250 V)
  Part No: ⚠ 1-576-233-51
  For 220 to 240 V setting
  Part: Fuse (4 A, 250 V)
  Part No: ⚠ 1-576-231-51

- Power block assembly (A-1768-444-A)
  For 100 to 120 V setting
  Part: Fuse (8 A, 250 V)
  Part No: ⚠ 1-576-300-51
  For 220 to 240 V setting
  Part: Fuse (6.3 A, 250 V)
  Part No: ⚠ 1-576-233-51

Replacement Procedure

1. Remove the PS panel assembly.
   (Refer to Section 2-1-1.)
2. Insert a flat-blade screwdriver into the groove of the fuse holder, and rotate it in the direction of arrow A (by about 90˚) to unlock. (Fig. 1)
3. Remove the fuse with the fuse holder. (Fig. 2)
4. Remove the fuse from the fuse holder. (Fig. 3)

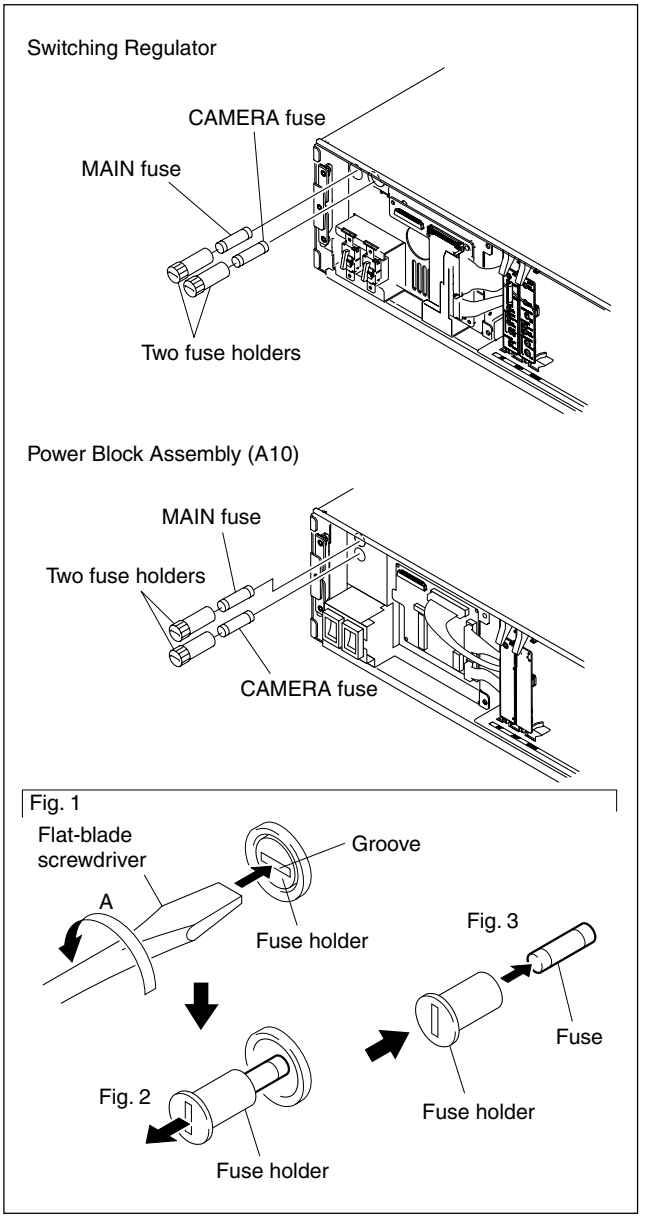

5. Attach the fuse in the reverse order.

Note

A spring is already attached in the fuse holder. When attaching a new fuse, rotate the flat-blade screwdriver in the direction of arrow C (by about 90˚) while pressing it in the direction of arrow B to lock the fuse holder.

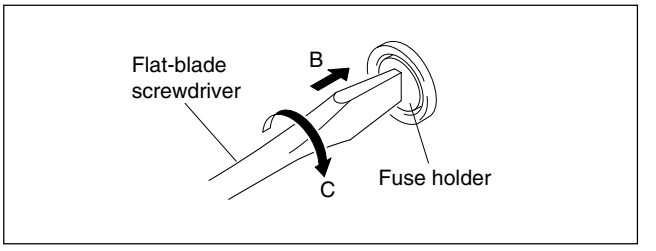

2-1-3. Replacing the DC Fan (HDCU1000/1080)

CAUTION

If the fan is defective, the temperature inside HDCU1000/1080 will rise. Touching the inside of the unit in this state may cause a burn.
Replace the parts after turning off the power and cooling the inside.

The fans that are used in the rear panel of HDCU1000/1080 are recommended replacement parts.
The lifespan of these fans is about 30,000 hours, which means that the fans can be used for about three and a half years if the power is on all the time, so as a guideline the fans should be replaced every three and a half years.

Two types of power supply units are installed in this unit, and the DC fan to be replaced and replacement method are different for each type.
This section describes replacement method for the following items.

- Replacing the DC fan of switching regulator (1-468-945-11)
- Replacing the DC fan of power block assembly (A10) (A-1768-444-A)

Replacing the DC Fan of Switching Regulator (1-468-945-11)

When replacing, be sure to use the specified part.
DC fan: 9-885-092-89

1. Turn off the main power and disconnect the plug from the outlet.
2. Remove the switching regulator.
   (Refer to Section 2-1-1.)
3. Remove the six screws and remove the cover.
4. Remove the harness from the wire clamp.
5. Disconnect the harness from the connector J19.
6. Remove the four screws and remove the fan portion.

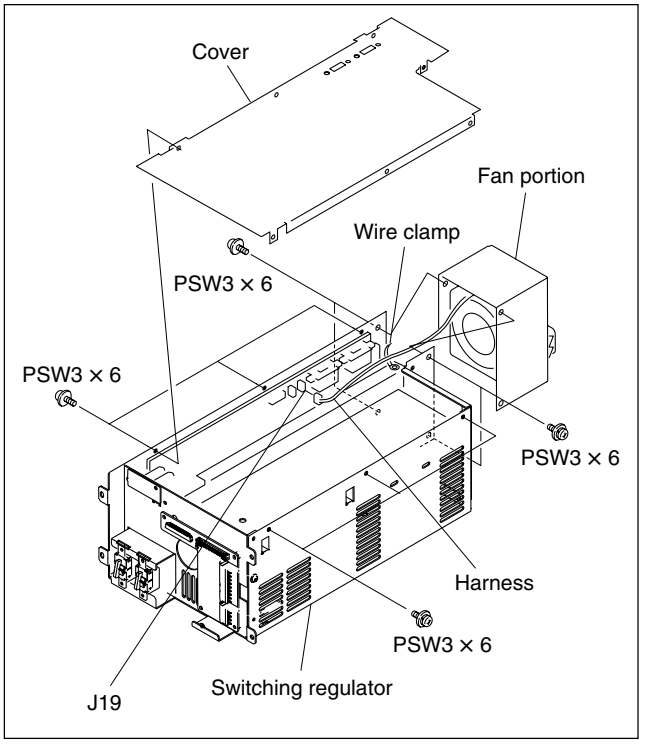

7. Remove the three screws and remove the fan bracket.
8. Remove the DC fan and mesh from the fan cover.

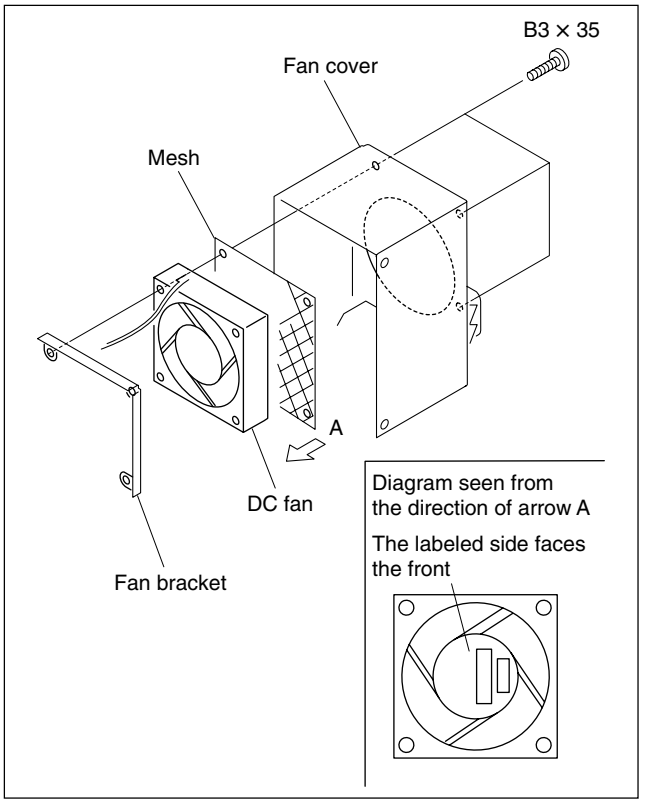

9. Install the DC fan in the reverse order.

   Note

   Install the DC fan in the direction shown in the diagram above.

Replacing the DC Fan of Power Block Assembly (A10) (A-1768-444-A)

Use the following specified fan for replacement.
DC fan: 1-787-419-12

1. Turn off the power and disconnect the power cable from the electrical outlet.
2. Remove the power block assembly (A10). (Refer to Section 2-1-1.)
3. Remove the 10 screws to detach the cover.
4. Disconnect the harness from the connector CN8006 on the RE-276 board.
5. Remove the two screws to detach the DC fan.

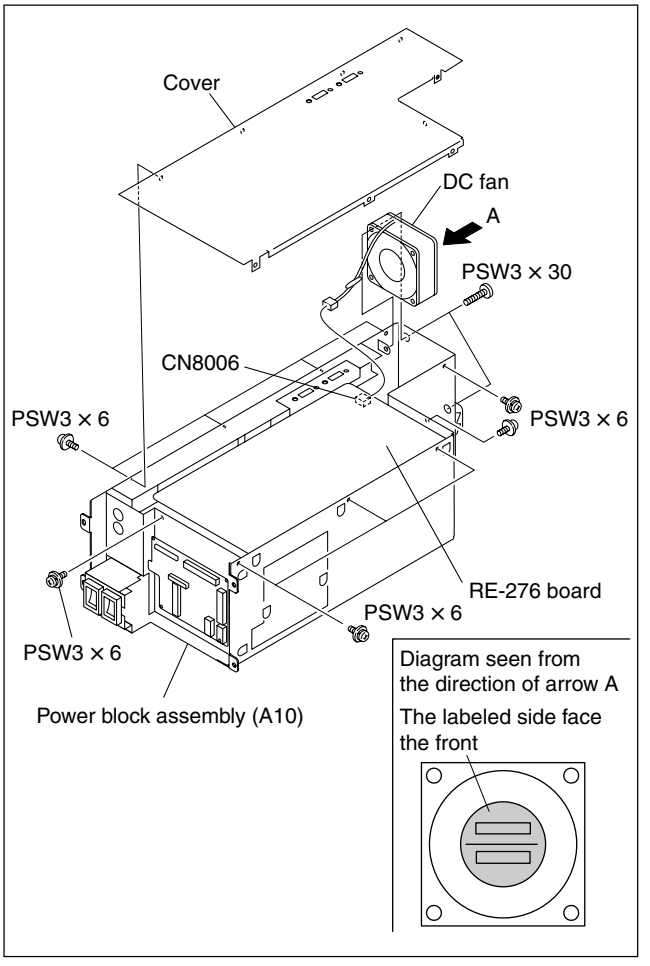

6. Install the DC fan by reversing steps 4 to 5.

Note

Install the DC fan in the orientation shown in the figure above.

7. Take in the slack of the DC fan harness at the harness clamp as shown in the figure.

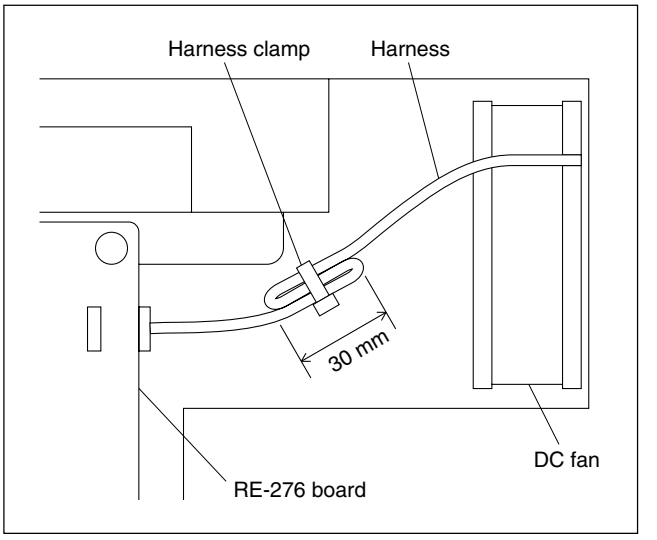

8. Install the power block assembly (A10) by reversing steps 1 to 3.

2-1-4. Removing the Rear Panel (HDCU1000/1080)

1. Remove the upper cover.
2. Remove the board inserted into the slot. (Skip this step if no board is inserted into the slot.)
3. Disconnect the harness from the connector CN104 on the SDP-12 board.
4. Remove the eleven screws.

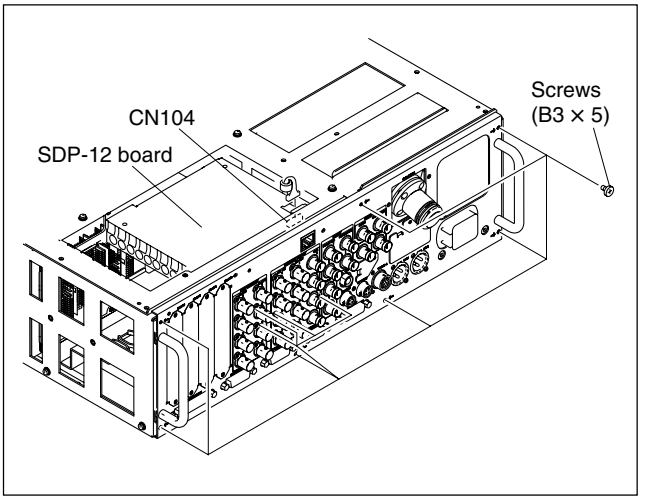

5. Disconnect the harness from connector CN1 on the CN-2718 board.
6. Remove the rear panel in the direction of the arrow.
7. Disconnect the harness B from connector CN15 on the CN-2672 board.
8. Disconnect the flexible card wire from the connector CN6 on the CBN-21 board.

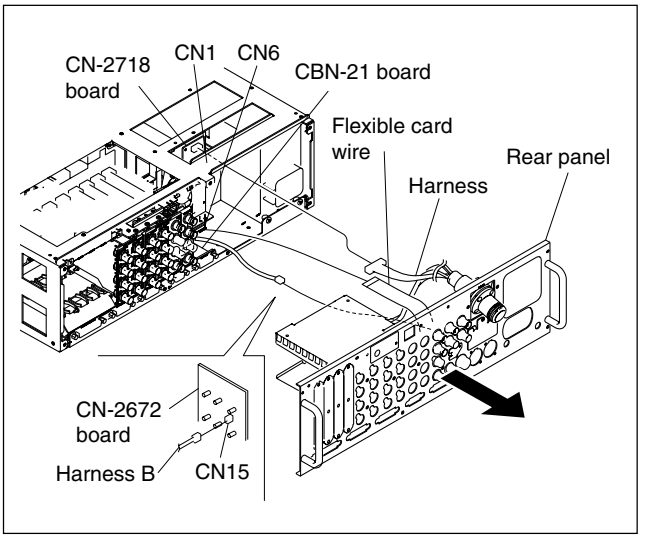

9. Install the rear panel in the reverse order.

2-1-5. Replacing the SDP-12 Board (HDCU1000/1080)

1. Remove the rear panel. (Refer to Section 2-1-4.)
2. Remove the five screws, and remove the cover and the harness guide.
3. Remove the two hexagonal bolts.

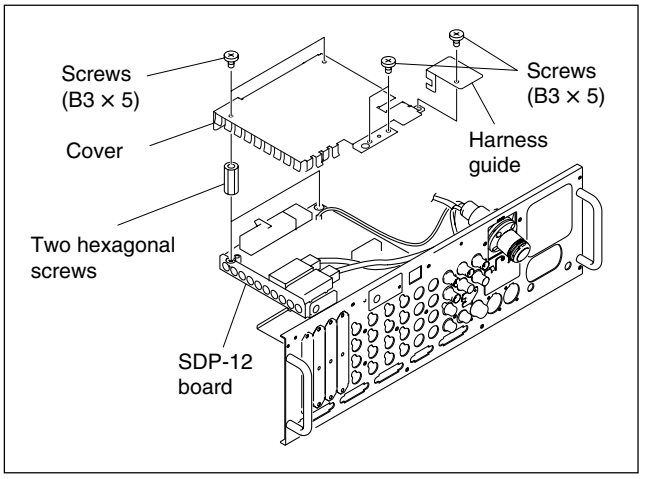

4. Disconnect the harness from the connector CN103 on the SDP-12 board.
5. Disconnect the optical cables from the connectors CP201 and CP401 on the SDP-12 board.

Note

When disconnecting the optical cables, disconnect the cables holding the blue portion of the plug.

6. Remove the two screws and remove the SDP-12 board.

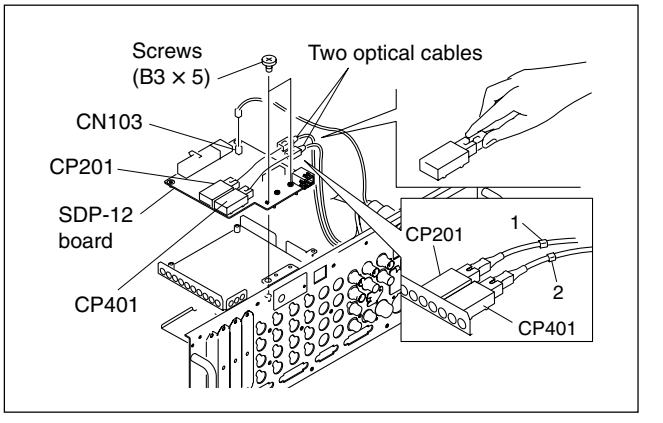

7. Reinstall the SDP-12 board by reversing the steps of removal.

Notes

- When connecting the optical cables, push them in the connectors until a click sound is heard.
- Connect optical cable 1 to the connector CP201, and optical cable 2 to the connector CP401. If they are connected to incorrect positions, the signal will not be output.

2-1-6. Replacing the MB-1071/1071A Board (HDCU1000/1080)

Either the MB-1071 board or the MB-1071A board is used depending on the serial No. of the unit.

1. Remove the rear panel. (Refer to Section 2-1-4.)
2. HDCU1000:
   Pull out the HIF-25* board, the SDI-85 board, the SDI-86 board, and the CN-2674 board in the direction of the arrow.

   ∗: The number of the boards to be used differs depending on the serial No. of the HDCU1000.

   HDCU1080:
   Pull out the HIF-25*1 board, the SDI-85 board, the SDI-86 board, and the CN-2674 board in the direction of the arrow.

   ∗1: The board may not be used depending on the serial No. of the HDCU1080.

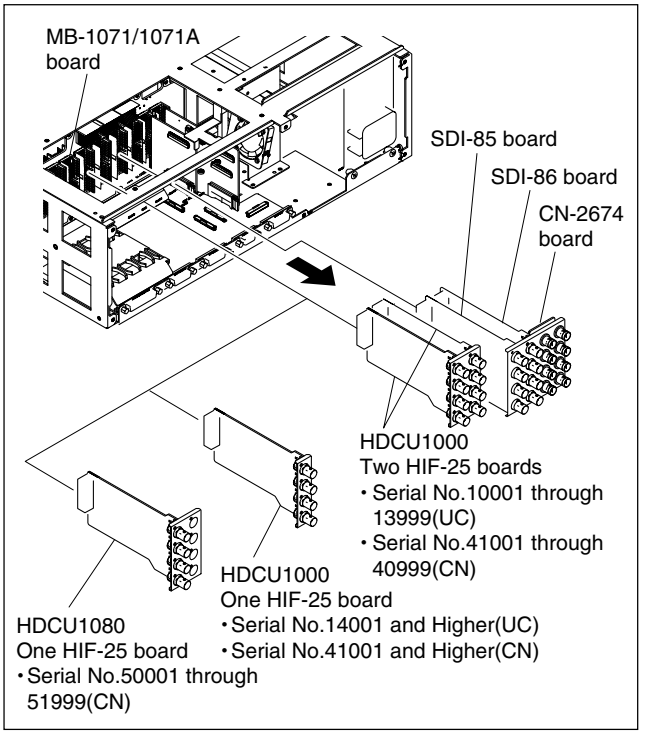

3. Remove the screw securing the VIF stopper.
4. Disconnect the two flexible card wires from connectors CN8 and CN9 on the CNB-21 board, and pull out the VIF-34 board in the direction of the arrow.
5. Disconnect the flexible card wire from the connector CN7 on the CNB-21 board, and pull out the ADO-10 board in the direction of the arrow.

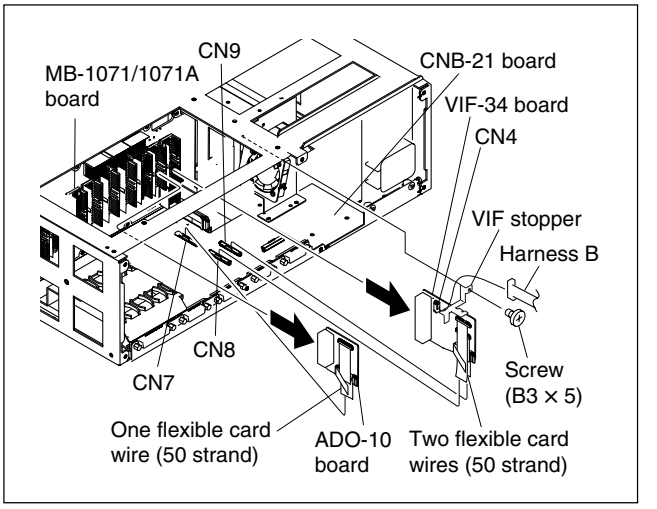

6. Pull the lever in the direction of the arrow and remove all the plug-in boards.

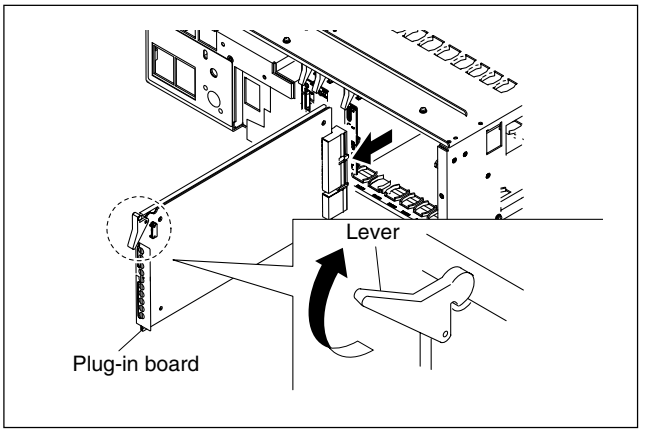

7. Remove the three screws and remove the rear board fixing plate.

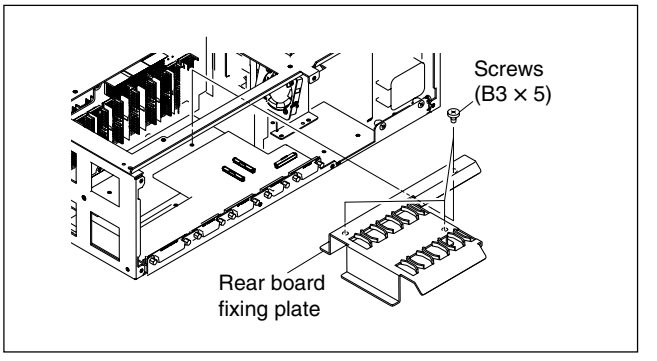

8. Remove the switching regulator.
   (Refer to Section 2-1-1.)

9. Remove the four nylon rivets, and remove the harness guide in the direction of the arrow.
10. Disconnect the harnesses from the connectors CN31 and CN32 on the MB-1071/1071A* board.

    ∗: The connector CN31 of MB-1071A board is on an opposite side.

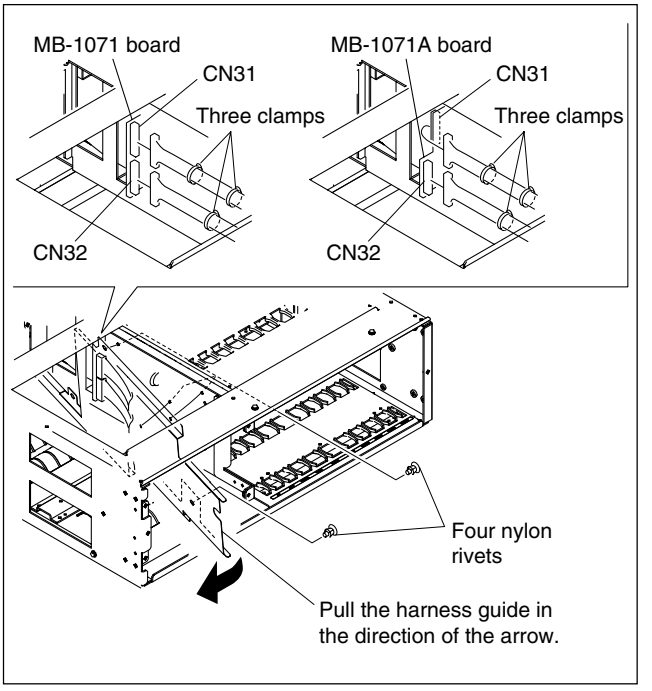

11. Remove the eight screws and remove the MB-1071/1071A board.

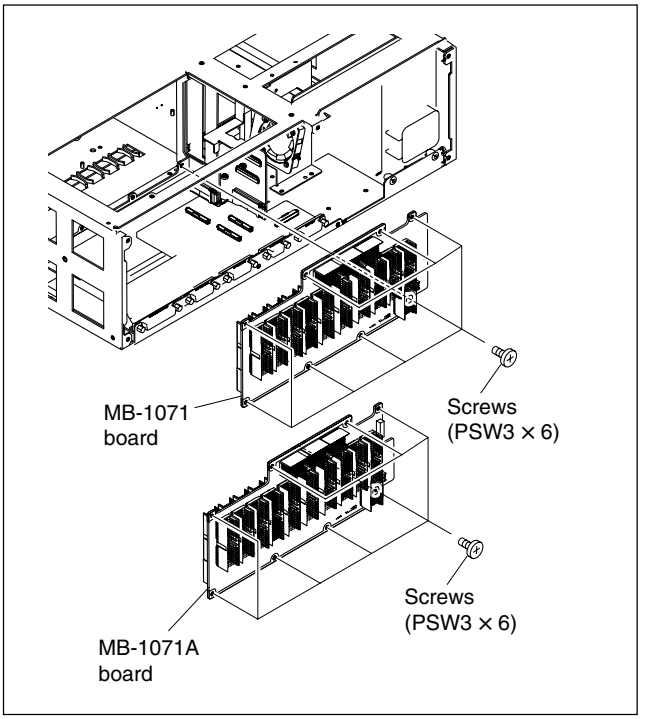

12. Install the MB-1071 board in the reverse order.

2-1-7. Replacing the CNB-21 Board (HDCU1000/1080)

1. Remove the VIF-34 board and ADO-10 board. (Refer to Section 2-1-6.)
2. Remove the three screws and remove the rear board fixing plate.
3. Remove the ten hexagonal screws and remove the CNB-21 board.

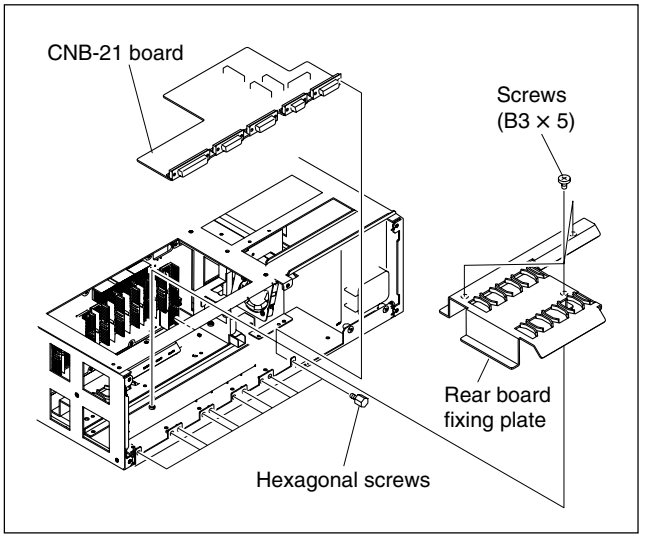

4. Install the CNB-21 board in the reverse order.

2-2. Replacing the Main Parts (HDCU1500)

Be sure to perform the following operation when replacing or removing the main parts.

- Turn off the main power and disconnect the plug from the outlet.

Note

Wait for at least three minutes before starting replacement, because even after turning off the power, a high voltage remains in the machine that could cause electric shock.

2-2-1. Replacing the Power Supply Unit (HDCU1500)

WARNING

The components marked ⚠ are critical to safe operation. If you replace with parts other than the specified ones, a fire or electric shock may result from that.

CAUTION

When repairing or replacing the power supply, set the voltage. If the voltage is set incorrectly, a fire or electric shock may result from that.

- When repairing or replacing the power supply, set to the same power supply voltage as that of repair work bench.
- When delivering to the user, adjust the power supply voltage to suit the user.

Gently remove or attach the power supply unit holding it by hand.
Otherwise, the power supply unit may fall, causing an injury.

Replacement Part

Part : Power supply unit
Part No. : ⚠ 1-468-935-11

Part : Power block assembly (D00)
Part No. : ⚠ A-1768-442-A

1. Remove the nine screws and remove the cover.

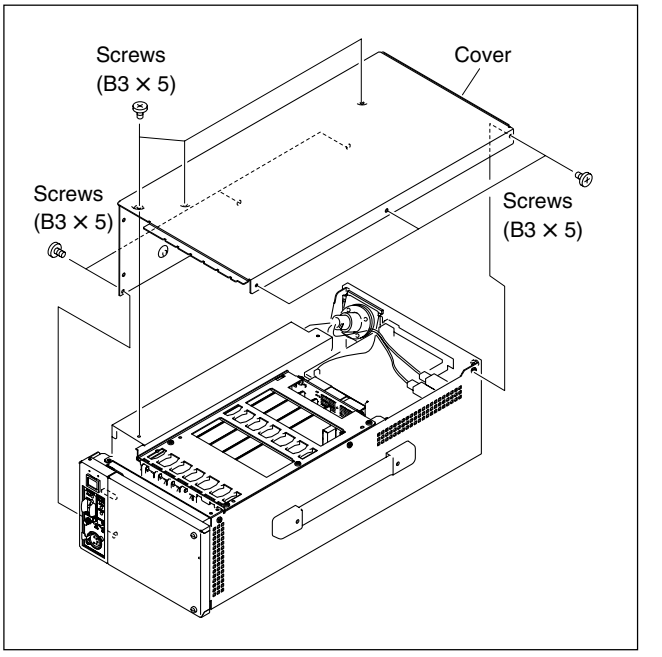

2. Remove the two screws and remove the harness from the two connectors on the power supply unit.
3. Remove the power supply unit in the direction of the arrow.

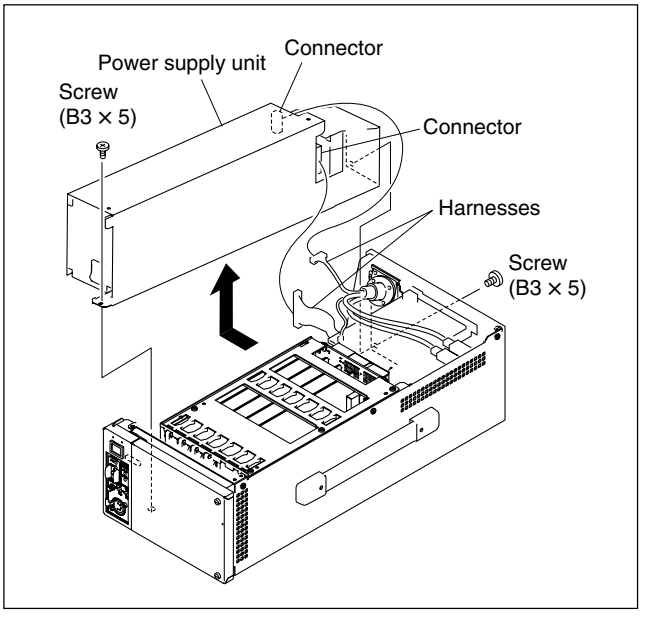

4. Install the power supply unit in the reverse order.

2-2-2. Replacing the DC Fan (HDCU1500)

CAUTION

If the fan is defective, the temperature inside HDCU1500 will rise. Touching the inside of the unit in this state may cause a burn.
Replace the parts after turning off the power and cooling the inside.

The fans that are used in the rear panel of the unit are recommended replacement parts.
The lifespan of these fans is about 30,000 hours, which means that the fans can be used for about three and a half years if the power is on all the time, so as a guideline the fans should be replaced every three and a half years.

Two types of power supply units are installed in this unit, and the DC fan to be replaced and replacement method are different for each type.
This section describes replacement method for the following items.

- Replacing the DC fan of power supply unit (1-468-935-11)
- Replacing the DC fan of power block assembly (D00) (A-1768-442-A)

Replacing the DC Fan of Power Supply Unit (1-468-935-11)

When replacing, be sure to use the specified part.
DC fan : 9-885-098-47

1. Turn off the main power and disconnect the plug from the outlet.
2. Remove the power supply unit. (Refer to Section 2-2-1.)
3. Remove the three screws and remove the fan from the power supply unit.
4. Disconnect the harness for the fan from the connector J4.

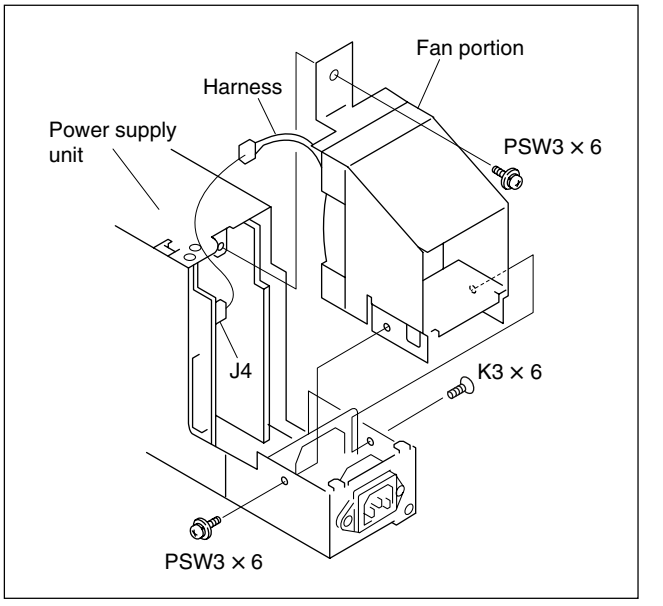

5. Remove the three screws and remove cover 2.
6. Remove the DC fan from cover 2.

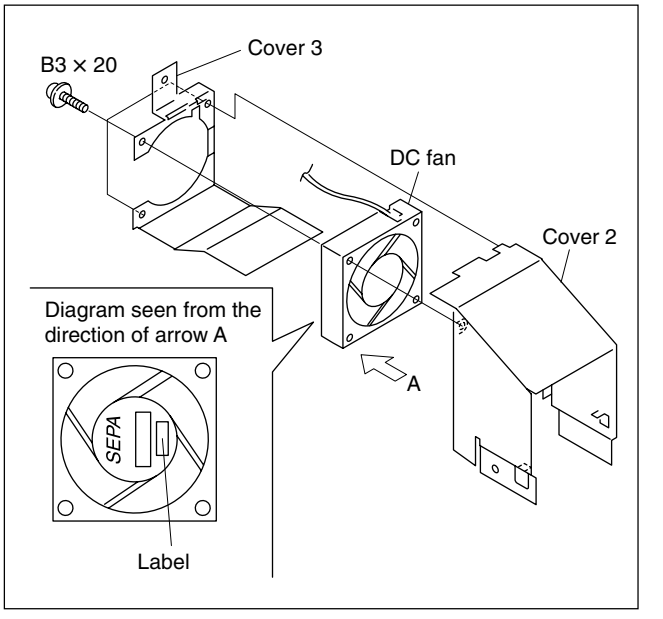

7. Install the DC fan in the reverse order.

Note

Install the new DC fan in the direction shown in the diagram above.

Replacing the DC Fan of Power Block Assembly (D00) (A-1768-442-A)

Use the following specified fan for replacement.
DC fan: 1-787-419-12

1. Turn off the power and disconnect the power cable from the electrical outlet.
2. Remove the power block assembly (D00). (Refer to Section 2-1-1.)
3. Disconnect the harness from the connector CN8003 on the RE-274 board.
4. Release the harness from the harness clamp.

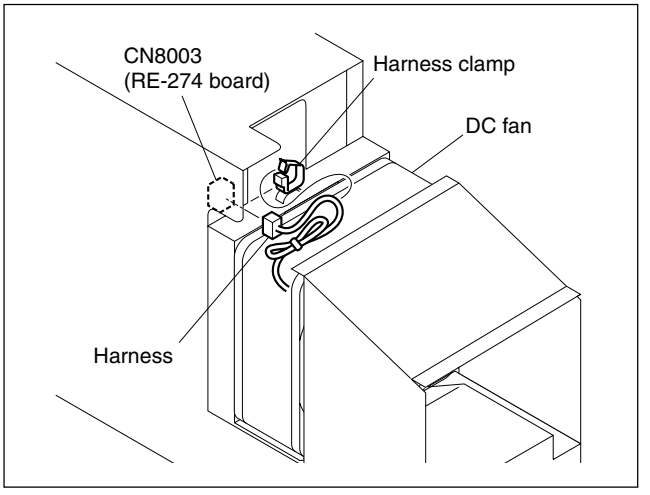

5. Remove the two screws to detach the fan cover plate.
6. Remove the two screws to detach the DC fan.

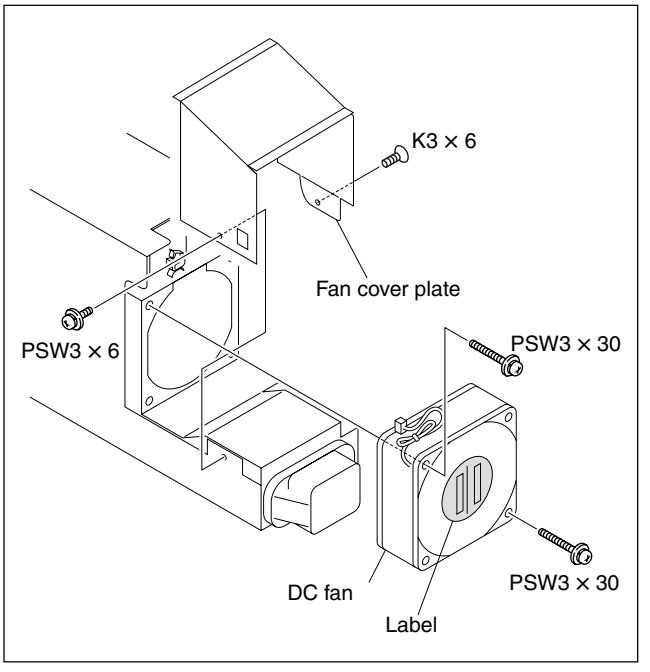

7. Install the DC fan by reversing steps 3 to 6.
   Note
   Install the DC fan in the orientation shown in the figure above.

8. Take in the slack of the DC fan harness at the harness clamp.
9. Draw the slack of the harness in the arrow direction and clamp it with a tie band as shown in the figure below.
   Note
   After the harness has been clamped, cut the redundant part of the tie band.

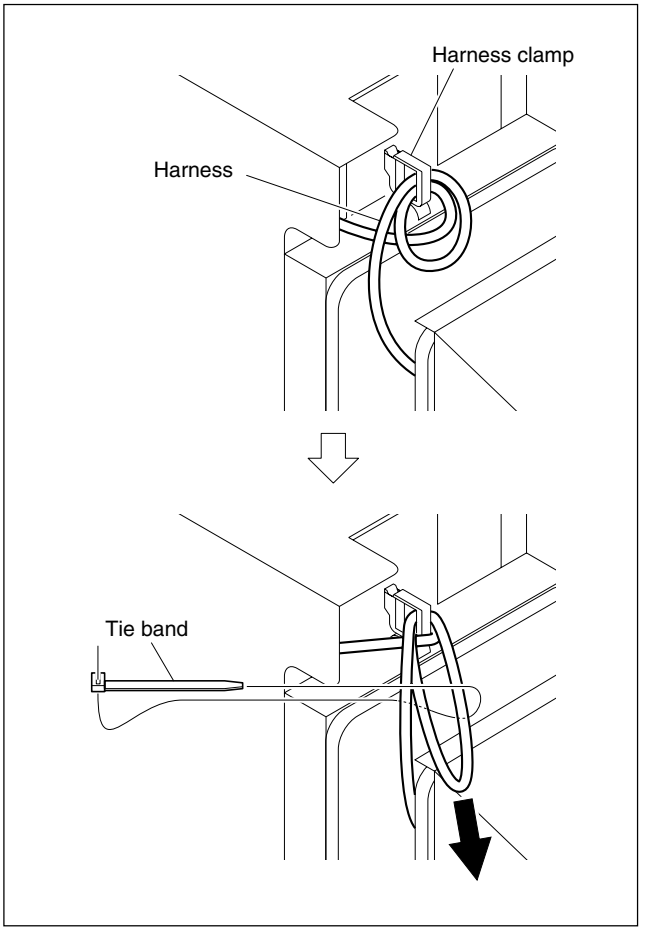

10. Install the power block assembly (D00) by reversing steps 1 to 2.

Notes on Disassembling the Power Block Assembly (D00)

After the power block assembly (D00) was disassembled and parts have been replaced or repaired, extend the harnesses and clamp them with harness clamps referring to the following figures.

Thermostat Harness and Harness (BOARD3)

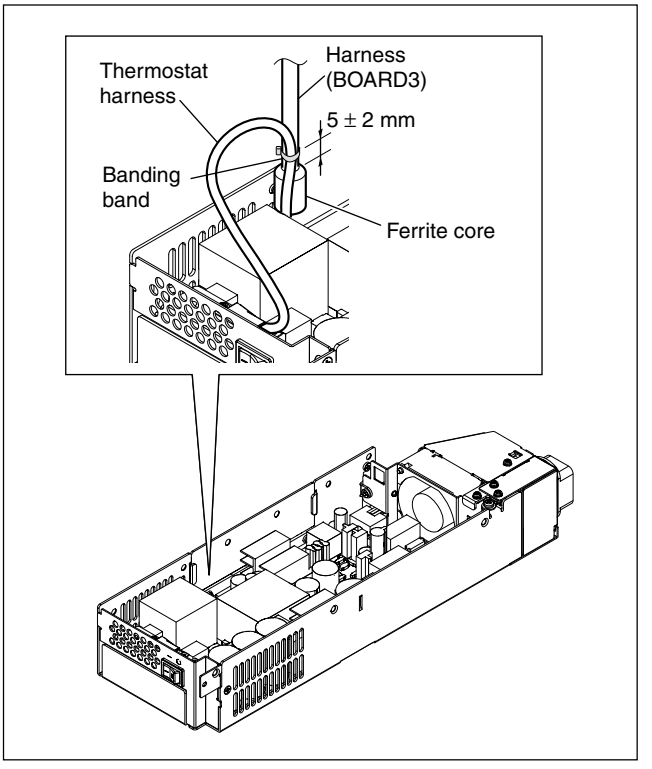

Harness (BOARD1) and Harness (BOARD2) (Bottom Side)

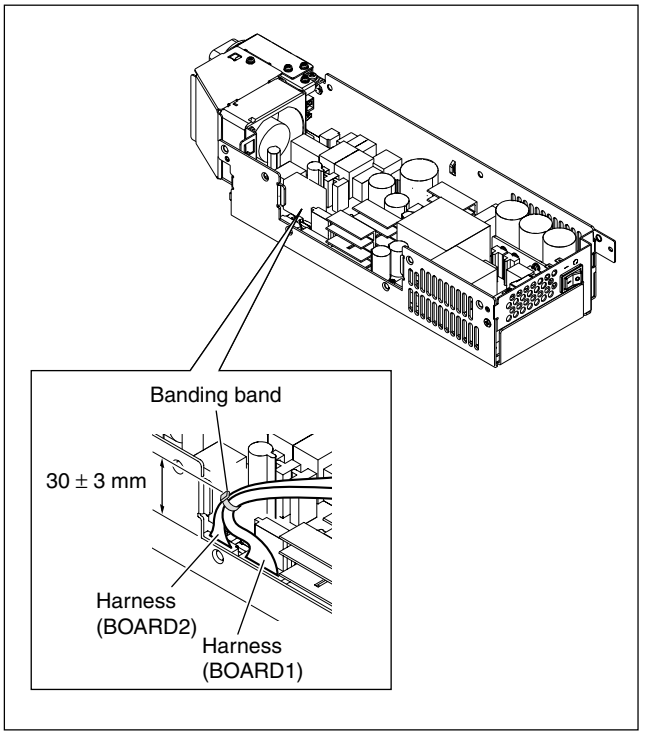

Harness (BOARD1) and Harness (BOARD2) (Upper Side)

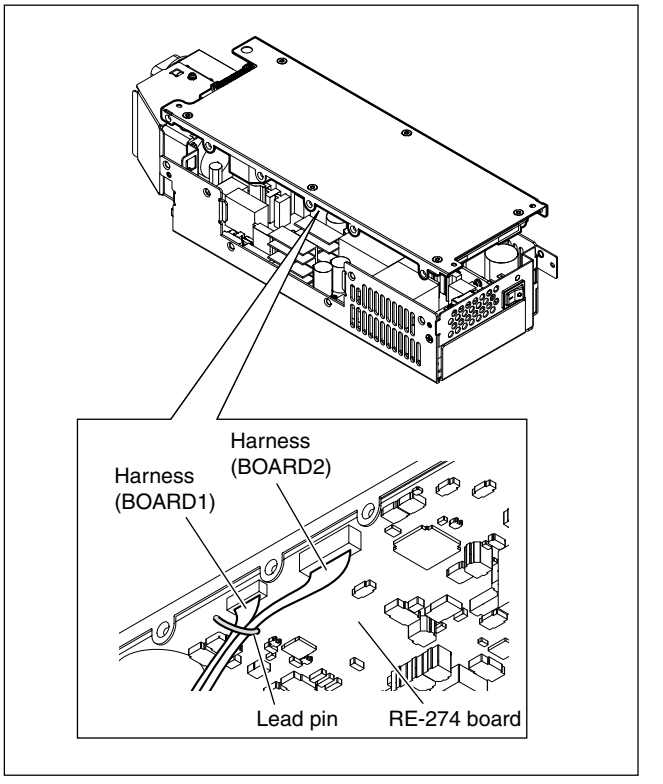

2-2-3. Replacing the Front Panel (HDCU1500)

1. Remove the cover. (Refer to Section 2-2-1.)
2. Loosen the two coin screws.
3. Remove the step shaft and remove the front panel, nylon washer from the income panel as shown in the figure below.

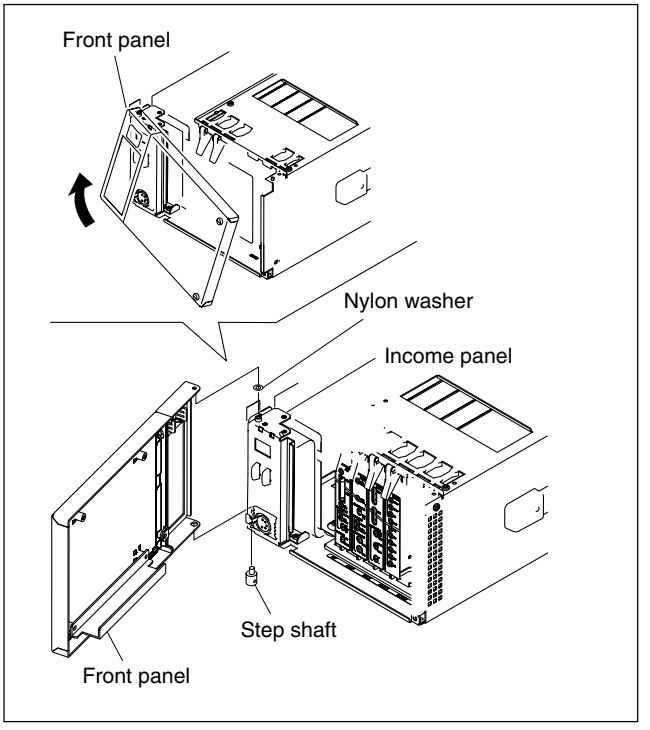

4. Install the front panel in the reverse order.

2-2-4. Removing the Rear Panel (HDCU1500)

1. Remove the cover. (Refer to Section 2-2-1.)
2. Disconnect the harness from the connector CN104 on the SDP-12 board.
3. Disconnect the harness from the power supply unit.
4. Remove the eight screws and the rear panel.

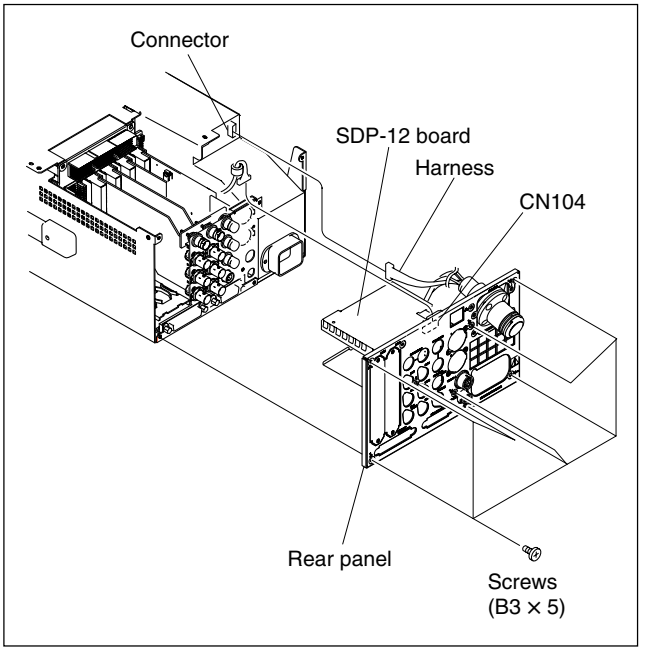

2-2-5. Replacing the MB-1072 Board (HDCU1500)

1. Remove the rear panel. (Refer to Section 2-2-4.)
2. Pull the lever in the direction of the arrow. Remove the plug-in board.

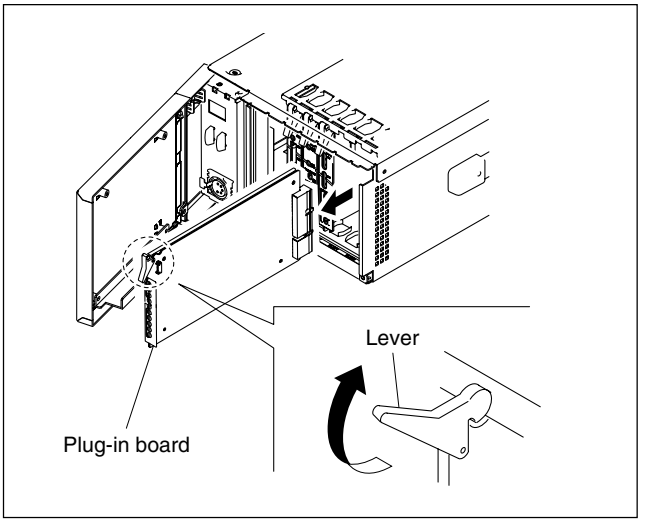

3. Remove the two screws of the VIF stopper securing the rear board block.
4. Disconnect the harness B from the connector CN15 on the CN-2672 board.
5. Disconnect the flexible card wire from connector CN3 on the CNB-22 board, and pull out the HIF-27 board, the SDI-87 board, and the CN-2676 board in the direction of the arrow.

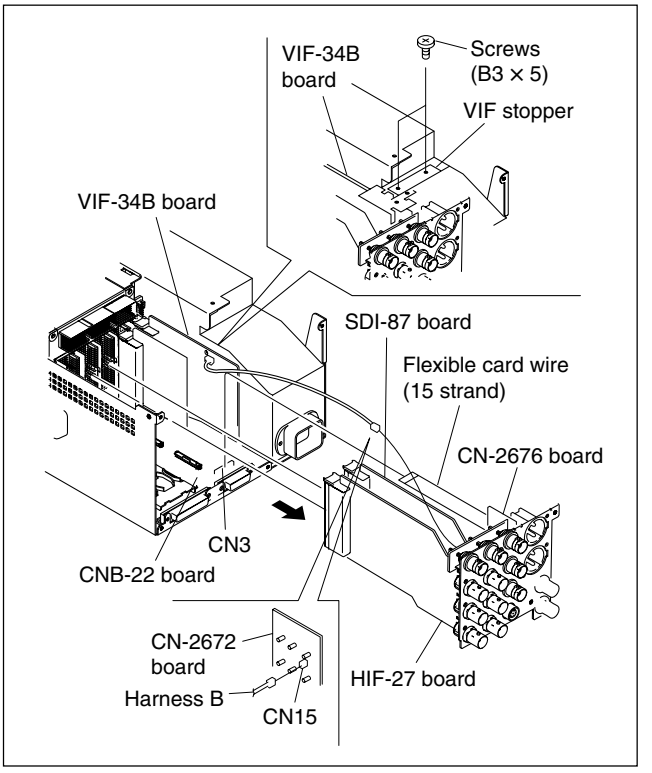

6. Disconnect the harness from the connectors CN4 and CN101 on the VIF-34B board.
7. Disconnect the flexible card wire from the connector CN5 on the CNB-22 board, and pull out the VIF-34B board in the direction of the arrow.
8. Disconnect the flexible card wire from the connector CN4 on the CNB-22 board, and pull out the ADO-10 board in the direction of the arrow.

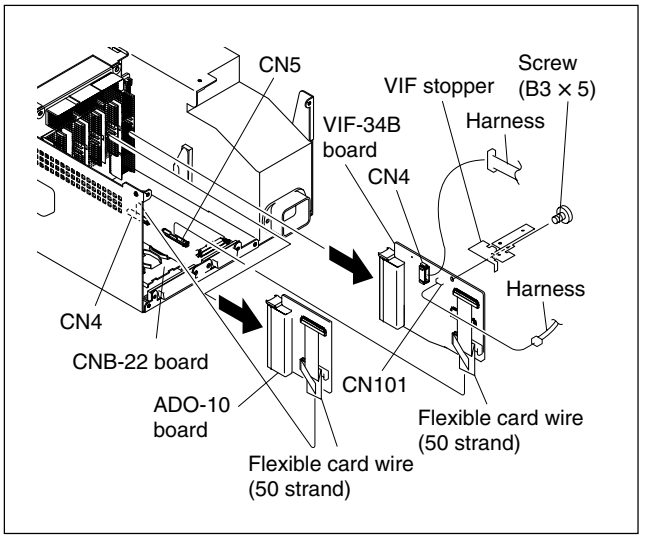

9. Disconnect the harness from the connector CN1 on the MB-1072 board.
10. Remove the four screws and remove the MB-1072 board.

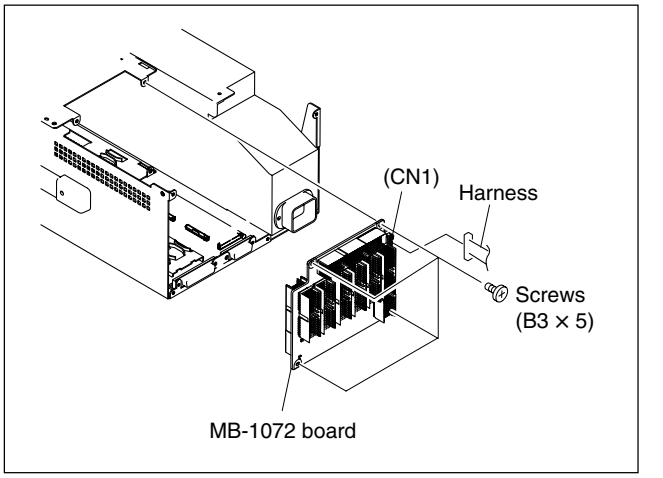

11. Install the MB-1072 board in the reverse order.

2-2-6. Replacing the CNB-22 Board (HDCU1500)

1. Replace the CNB-22 board after removing the VIF-34B board and the ADO-10 board.
   (Refer to Section 2-2-5.)
2. Remove the two screws and remove the rear board fixing plate.

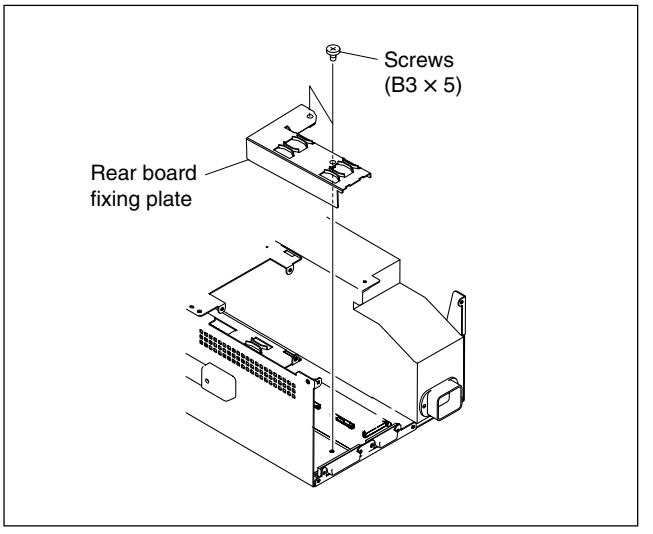

3. Remove the four hexagonal screws and remove the CNB-22 board in the direction of the arrow.

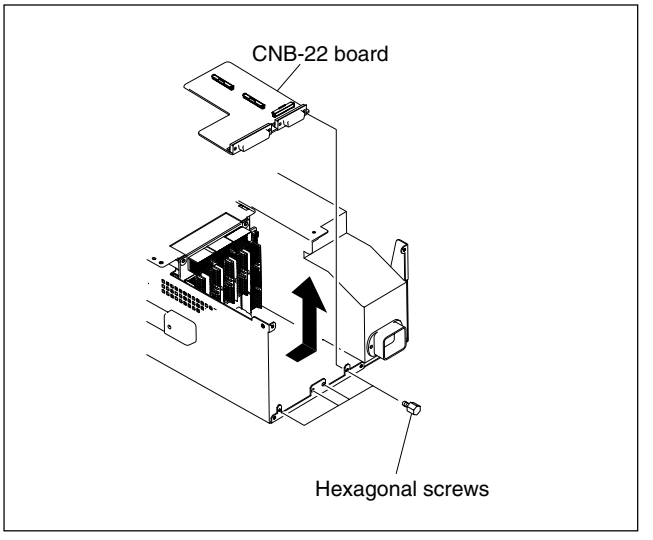

2-2-7. Replacing the SDP-12 Board (HDCU1500)

1. Remove the rear panel (Refer to Section 2-2-4).
2. Remove the five screws, and remove the cover and the harness guide.
3. Remove the two hexagonal bolts.

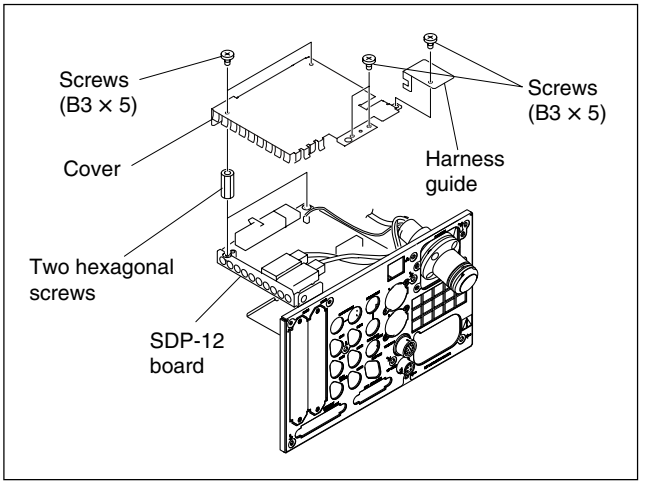

4. Disconnect the harness from the connector CN103 on the SDP-12 board.
5. Disconnect the optical cables from the connectors CP201 and CP401 on the SDP-12 board.

   Note

   When disconnecting the optical cables, disconnect the cables holding the blue portion of the plug.

6. Remove the two screws and remove the SDP-12 board.

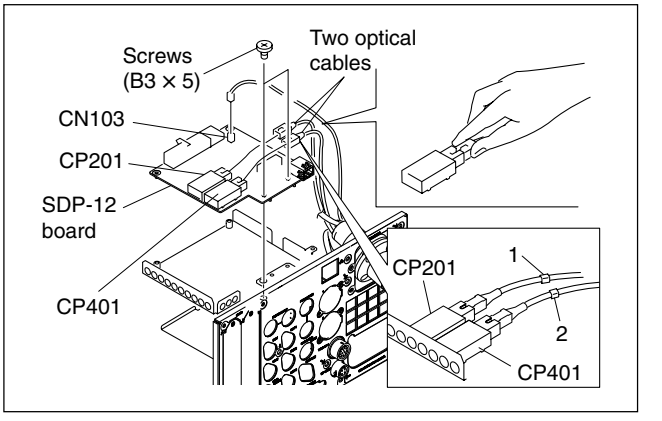

7. Reinstall the SDP-12 board by reversing the steps of removal.

   Notes

   - When connecting the optical cables, push them in the connectors until a click sound is heard.
   - Connect optical cable 1 to the connector CP201, and optical cable 2 to the connector CP401. If they are connected to incorrect positions, the signal will not be output.

Section 3
Electrical Alignment

3-1. Preparation

3-1-1. Required Equipment

Measures

- Digital oscilloscope (300 MHz or higher)
  Tektronix TDS460A or equivalent
- SD waveform/Vector monitor
  Tektronix 1780R or equivalent (for NTSC)
  Tektronix 1781R or equivalent (for PAL)
- SD signal generator
  Tektronix TSG170A or equivalent (for NTSC)
  Tektronix TSG271 or equivalent (for PAL)
- Audio oscillator
  Tektronix SG-5010 or equivalent
- Frequency counter
  Advantest TR5821AK or equivalent

Related equipment

- HDVS color video camera
  HDC1000/1080/1500/1580
- Master setup unit
  MSU-900/950

Tools

- Front extension board EX-982
  (Sony P/N : A-1153-700-A)
- Rear extension board EX-983
  (Sony P/N : A-1153-701-A)
- Extension board EX-984
  (for SDP-12 board extension)
  (Sony P/N : A-1153-715-A)

3-1-2. Notes on Adjustments

- Make sure all the measures have already been calibrated.
- Make sure “3-1-4. Initialization Settings” have already been finished.
- Make sure the adjustment of the HDC1500/1580 has already been finished.
- Types of the color bars to be output from the built-in SG:

Signal format	Y	C
HD-SDI	100 %	100 %
SD-SDI (D1)	100 %	75 %
SD-Component-analog (HKCU1001)	100 %	75 %
SD-Composite-analog (HKCU1001)	75 %	75 % (SMPTE)
SD-Composite-analog (HKCU1001)	100 %	75 % (EBU)

- To adjust HDCU1000/1080/1500, extend each plug-in board. Before pulling out the boards, be sure to turn off the main power.
- Before starting adjustment, warm up for about 10 minutes.
- Before using the MSU-900/950, check the version of the ROM. For details, refer to Section 1-1, “Checking the ROM and Software Version” of the separate Installation Manual for HDCU1000/1080/1500.

3-1-3. Connection of Equipment

Adjusting the HDCU1000/1080/1500

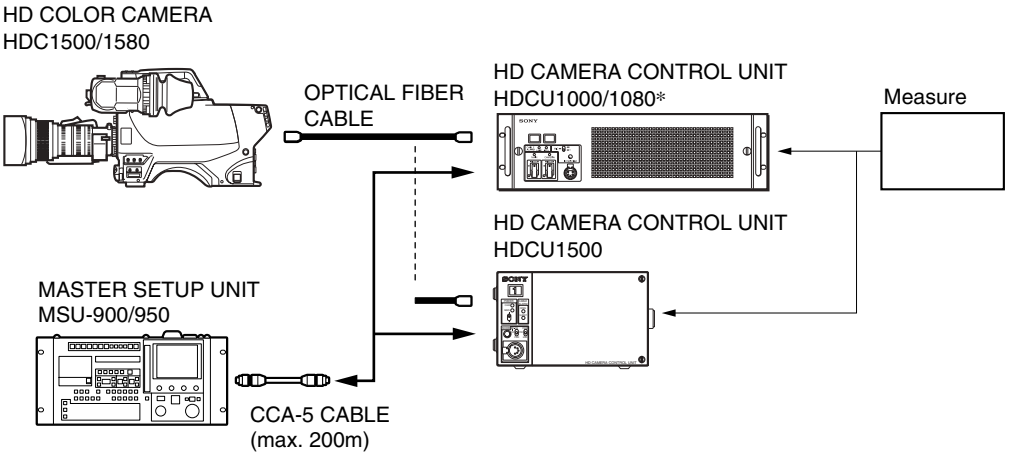

Adjusting the HKCU1001/1003

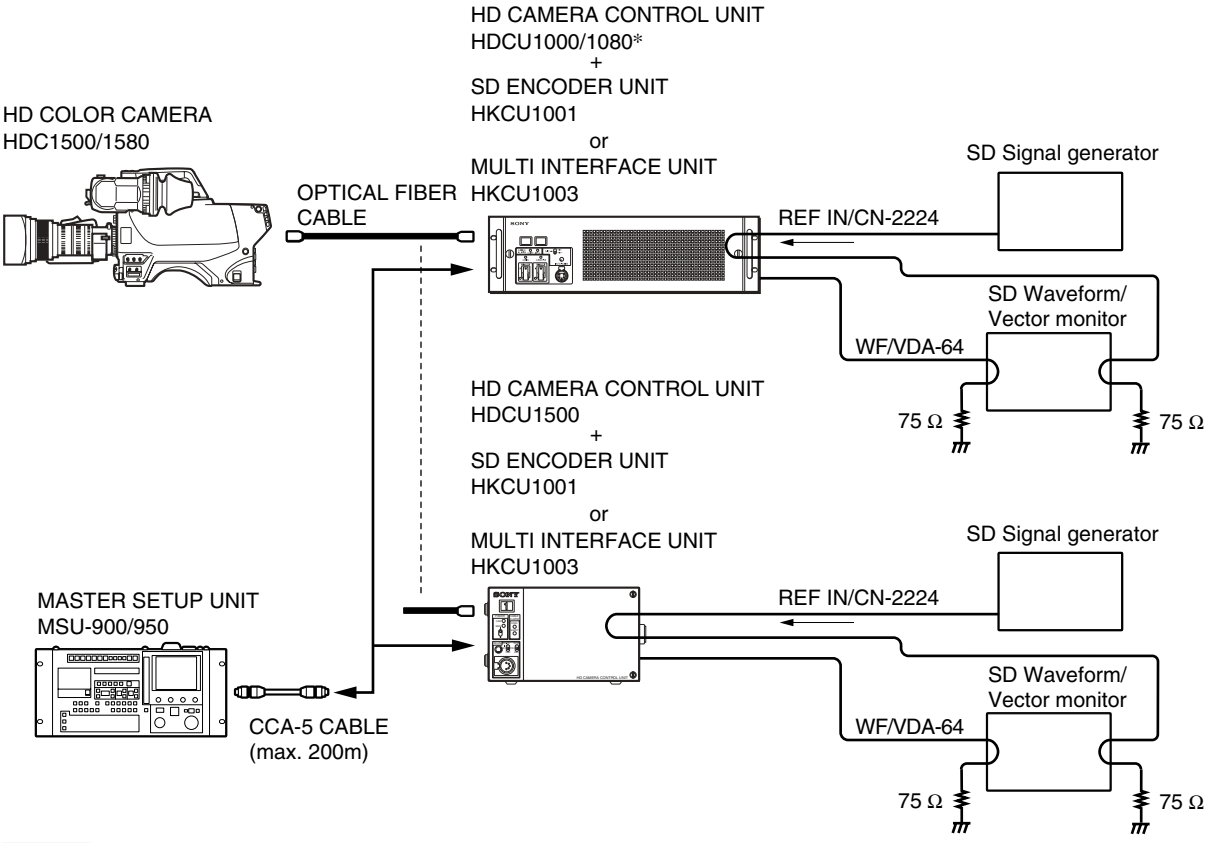

Note

*: Adjust the HDCU1080 in combination with the HDCU1080 and the HDC1580.

3-1-4. Initialization Settings

HDCU1000/1080/1500

Note

When changing the switch settings from the customer's setting positions, it is recommended to write down the customer's setting positions in the following table. After completing the adjustment, be sure to return the switches to the customer's setting positions.

Board	Switch	Setting during adjustment	Customer setting
AU-302	S2	PROD	
	S4	CARBON	
AU-303	S3	PROD	
	S5	CARBON	
AVP-6	S500	0 dB	
	S501	0 dB	
	S600	RTS	
	S601	RTS	
	S602	RTS	
	S603	RTS	

Set the switches other than the above to the state when shipped from the factory.
For details of the switch settings, refer to Section 1-7, "On-board Indicator/ Switch/Volume Functions" of the separate Installation Manual.

When using the MSU-900:

- Power supply and signal selector block
  - ALL button → OFF (Dark)
  - CAM PW button → ON (Lit)
  - TEST1 button → OFF (Dark)
  - TEST2 button → OFF (Dark)
  - BARS button → OFF (Dark)
  - CLOSE button → ON (Lit)

- Camera/CCU circuit ON/OFF block
  - DETAIL OFF button → OFF (Lit)
  - KNEE OFF button → ON (Dark)
  - AUTO KNEE button → OFF (Dark)
  - MATRIX OFF button → OFF (Lit)

- AUTO SETUP block
  - LEVEL button → OFF (Dark)
  - WHITE button → OFF (Dark)
  - BLACK button → OFF (Dark)

- Others
  - GAMMA OFF button → OFF (Dark)
  - MASTER GAIN selector button → 0

When using the MSU-950:

- Power supply and signal selector block
  - ALL button → OFF (Dark)
  - CAM PW button → ON (Lit)
  - TEST button → OFF (Dark)
  - BARS button → OFF (Dark)
  - CLOSE button → ON (Lit)

- AUTO SETUP block
  - LEVEL button → OFF (Dark)
  - WHITE button → OFF (Dark)
  - BLACK button → OFF (Dark)

- Others
  - GAMMA OFF* → ON (Not highlighted)
  - MASTER GAIN* → 0 (0 dB)

* : Press the function button and select it on the function menu display.

3-2. Audio System Adjustment

3-2-1. Microphone Level Adjustment

Measures : Oscilloscope, Audio oscillator

Note

This adjustment is described on the premise that the output impedance of the audio oscillator is 600 Ω.

Preparation

- To be extended : AVP-6 board (front side)
- To be extended : AU-298 board (camera side)
- Set CHU MIC GAIN CH1 on page "C05" of the configuration menu to 20 dB.
- Set CHU MIC GAIN CH2 on page "C05" of the configuration menu to 20 dB.
- S500 (F-3)/AVP-6 board → 0 dBu
- S501 (F-3)/AVP-6 board → 0 dBu
- Set the rear microphone on the camera side to MIC for both audio 1 and 2.

Adjustment Procedure

1. MIC1 level adjustment
   Input a sine wave of 1 kHz, 220 mV p-p (−20 dBu) from the audio oscillator to 185-pin (X), 183-pin (Y) and 181-pin (G) of the extension board (camera side).

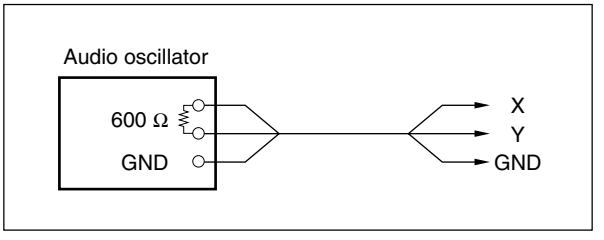

2. Measuring point : TP502 (G-3)/AVP-6 board
   Adjusting point : ⊘RV500 (F-3)/AVP-6 board
   Specifications : A = 1100 ±50 mV p-p

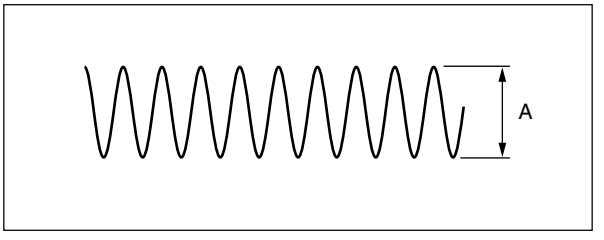

3. Remove the cable that is connected in step 1.

4. MIC2 level adjustment
   Input a sine wave of 1 kHz, 220 mV p-p (−20 dBu) from the audio oscillator to 155-pin (X), 153-pin (Y) and 151-pin (G) of the extension board (camera side).

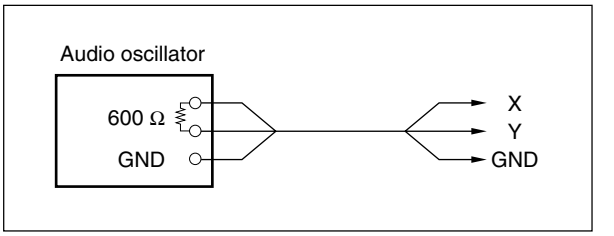

5. Measuring point : TP503 (G-3)/AVP-6 board
   Adjusting point : ⊘RV501 (F-3)/AVP-6 board
   Specifications : B = 1100 ±50 mV p-p

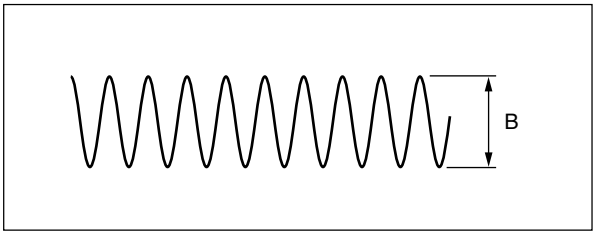

Setting after Adjustment

S500 (F-3), S501 (F-3)/AVP-6 board → Return to the original setting.

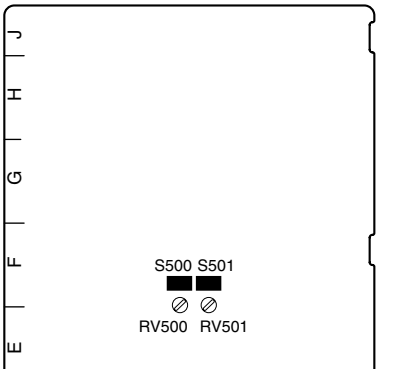

AVP-6 board (A side)

3-2-2. RTS Intercom Adjustment

Measures : Oscilloscope, Audio oscillator

Note

- This adjustment is described on the premise that the output impedance of the audio oscillator is 600 Ω.
- When the intercom system is the RTS system, perform this adjustment.

Preparation

- To be extended : AVP-6 board (front side)
- S4/AU-302 board → CARBON
- S5/AU-303 board → CARBON
- S602 (C-3)/AVP-6 board → RTS
- S600 (E-4)/AVP-6 board → RTS
- S603 (C-4)/AVP-6 board → RTS
- S601 (E-4)/AVP-6 board → RTS

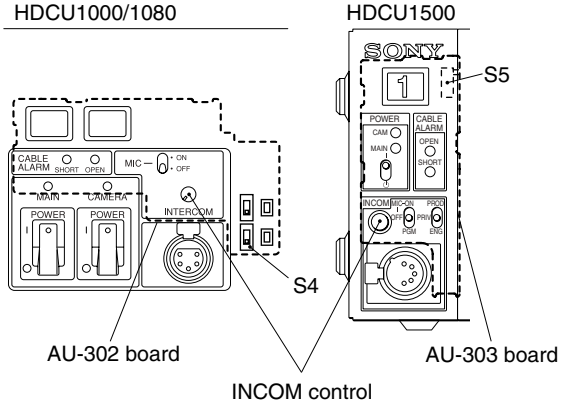

Adjustment Procedure (PROD CANCEL)

1. • S2 (INCOM SELECT)/AU-302 board (HDCU1000/1080) panel side → PROD
   • S3 (INCOM SELECT)/AU-303 board (HDCU1500) panel side → PROD
2. Connect a resistance of 200 Ω between a8-pin (CN-1 side) and C8-pin of the extension board.
3. Input a sine wave of 1 kHz, 220 mV p-p (−20 dBu) from the audio oscillator to 2-pin (X), 1-pin (Y) and 3-pin (G) of the INCOM connector on the HDCU front panel.

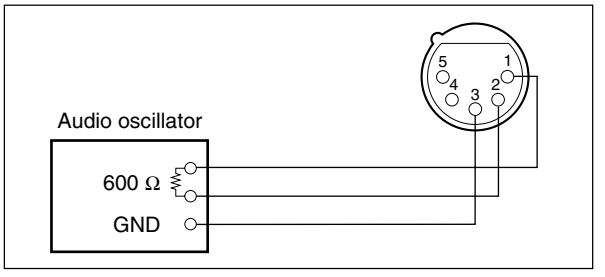

4. PROD CANCEL adjustment
   Measuring point : TP600 (B-4)/AVP-6 board
   Adjusting point : ⊘RV600 (PROD 2WIRE CANCEL)/AVP-6 board panel side
   Specifications : A = Minimize

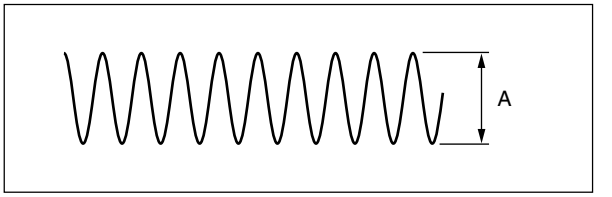

Adjustment Procedure (ENG CANCEL)

1. • S2 (INCOM SELECT)/AU-302 board (HDCU1000/1080) panel side → ENG
   • S3 (INCOM SELECT)/AU-303 board (HDCU1500) panel side → ENG
2. Connect a resistance of 200 Ω between a7-pin (CN-4 side) and C7-pin of the extension board.
3. Input a sine wave of 1 kHz, 220 mV p-p (−20 dBu) from the audio oscillator to 2-pin (X), 1-pin (Y) and 3-pin (G) of the INCOM connector on the HDCU front panel.

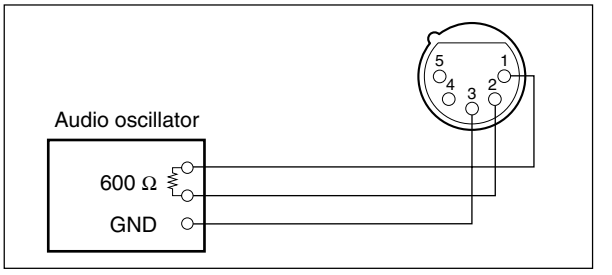

4. Measuring point : TP601 (B-4)/AVP-6 board
   Adjusting point : ⊘RV601 (ENG 2WIRE CANCEL)/AVP-6 board panel side
   Specifications : B = Minimize

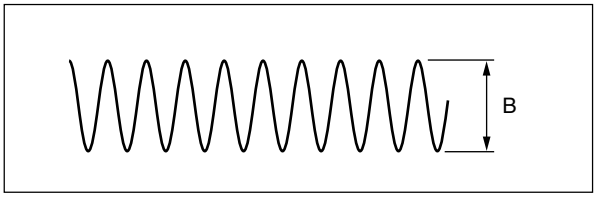

Setting after Adjustment

After adjustment is completed, return the switches to the original setting.

3-3. Video and Reference Signal System Adjustment

3-3-1. 27 MHz VCO Free-run Adjustment

Measure : Frequency counter, Oscilloscope

Preparation

- To be extended : AT-167 board (front side)
- Remove the cable connected to the REFERENCE IN connector on the HDCU rear panel.
- S401 (REFERENCE)/AT-167 board panel side → SD
- Connect the measure as shown in the following figure.
- After turning on the power, wait for 10 minutes at least and start adjustment.

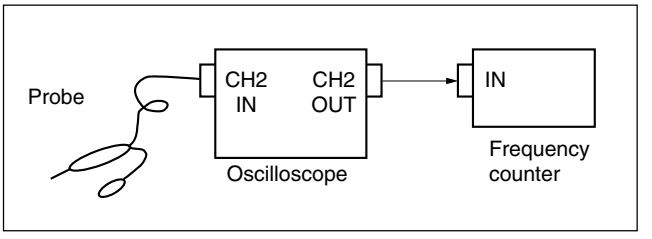

Adjustment Procedure

Measuring point : TP704 (F-4)/AT-167 board
Adjusting point : ⊘RV701 (F-2)/AT-167 board
Specifications : 27,000,000 ±10 Hz

Setting after Adjustment

After finishing the adjustment, return the switches to the original configuration. Reconnect the disconnected cables.

3-3-2. Clock (74 MHz) Duty Adjustment

Measure : Oscilloscope (20 MHz BWLimit: ON)

Adjustment Procedure

Measuring point : TP714 (H-1)/AT-167 board
Adjusting point : ⊘RV702 (G-1)/AT-167 board
Specifications : C = 1.60 ±0.04 Vdc

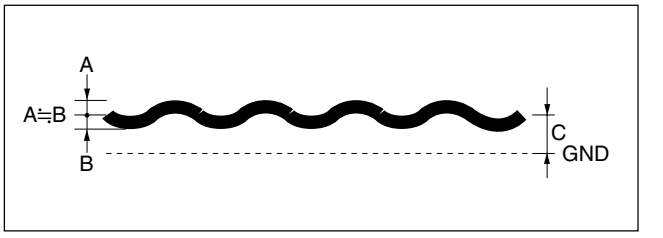

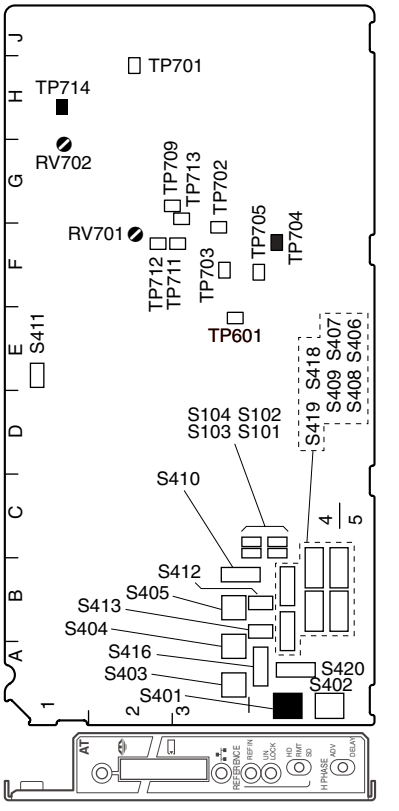

AT-167 board (A side and panel side)

3-3-3. Prompter 1/2 Level Adjustment

Measures : SD waveform monitor (NTSC or PAL)
SD signal generator (NTSC or PAL)

Preparation

Connect the SD signal generator (for NTSC : SMPTE color bar/for PAL : EBU color bar) to the PROMPTER IN connector on the HDCU rear panel.

Adjustment Procedure

1. PROMPTER 1 level adjustment
   Measuring point : PROMPTER 1 connector/CAMERA side
   Adjusting point : ◓RV301 (G-1)/DTX-5 board
   Specifications : A = 140 ±1 IRE
   (terminated at 75 Ω) (for NTSC)
   A = 1000 ±7 mV p-p
   (terminated at 75 Ω) (for PAL)

2. PROMPTER 2 level adjustment
   Measuring point : PROMPTER 2 connector/CAMERA side
   Adjusting point : ◓RV701 (G-2)/DTX-5 board
   Specifications : A = 140 ±1 IRE
   (terminated at 75 Ω) (for NTSC)
   A = 1000 ±7 mV p-p
   (terminated at 75 Ω) (for PAL)

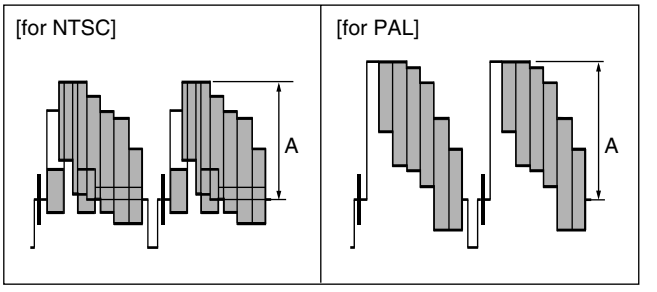

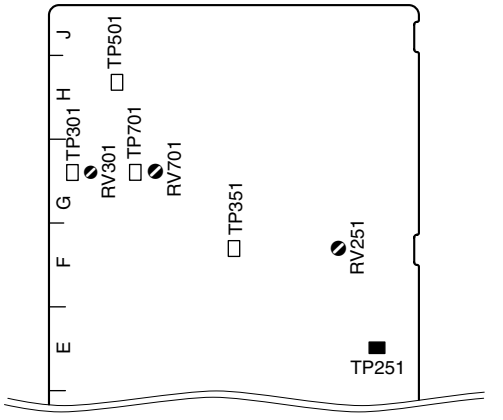

DTX-5 board (A side)

3-4. Video Signal System Adjustment (Front board)

3-4-1. SD-SDI Input VCO Free-run Adjustment

Measure : Frequency counter, Oscilloscope

Note

After replacing IC251 on the DTX-5 board only, perform this adjustment.

Preparation

- To be extended : DTX-5 board (front side)
- For the HDCU1000, disconnect the cables connected to the HD SDI1 connector on the HDCU rear panel, and the SD SDI1 connector on the HDCU rear panel
- For the HDCU1500, disconnect the cable connected to the RET1 connector on the HDCU rear panel.
- Connect the measure as shown in the following figure.
- After turning on the power, wait for 10 minutes at least and start adjustment.

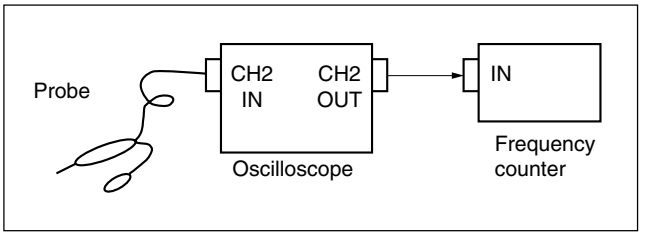

Adjustment Procedure

1. Measuring point : TP251 (E-4)/DTX-5 board
   Adjusting point : ◓RV251 (F-4)/DTX-5 board
   Specifications : 27.0 ±0.2 MHz

Note

After finishing the adjustment and waiting for 10 minutes at least, confirm that each specification is met.
If the specifications are not met, perform the adjustment again.

Setting after Adjustment

After finishing the adjustment, reconnect the disconnected cables.

3-4-2. STAIR CASE Adjustment

Measure : Oscilloscope

Note

Perform temporarily this adjustment after repairing. When the system is set up, perform the adjustment again according to the characteristic of the waveform monitor.

Preparation

To be extended : EN-159A/159B board (front side)

Adjustment Procedure

Measuring point : TP305 (E-3)/EN-159A/159B board
Adjusting point : ⊘RV302 (E-4)/EN-159A/159B board
⊘RV301 (E-4)/EN-159A/159B board
Specifications : A = 3.0 ±0.5 V p-p (⊘RV302)
B = 0 ±0.5 V dc (⊘RV301)

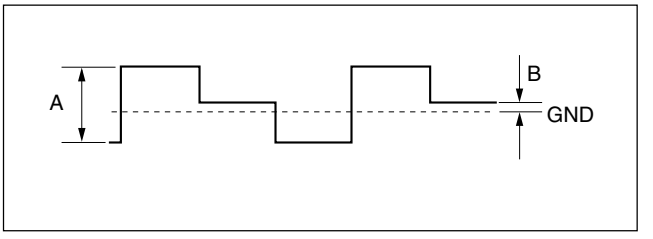

Settings after Adjustment

After finishing the adjustment, return the switches to the original setting.

3-5. SD Signal System Adjustment

3-5-1. VBS Output Level Adjustment

Measures : SD waveform monitor (NTSC or PAL)

Note

The adjustment can be performed using VBS on page "C09" of the configuration menu (Fine-adjustment can be performed when used as a system.)

Preparation

To be extended : EN-159A/159B board (front side)

Adjustment Procedure

1. Video level adjustment
   Measuring point : VBS OUT connector/VDA-64A board
   Adjusting point : ⊘RV303 (F-3)/EN-159A/159B board
   Specifications : A = 100 ±1 IRE
   (terminated at 75 Ω) (for NTSC)
   A = 700 ±7 mV
   (terminated at 75 Ω) (for PAL)

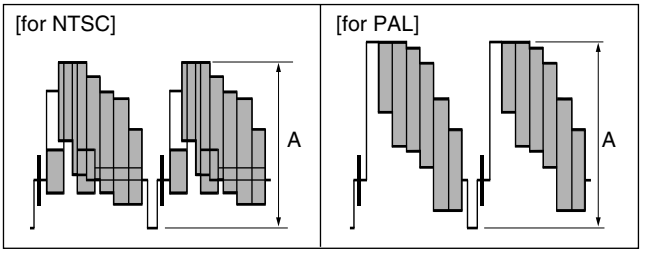

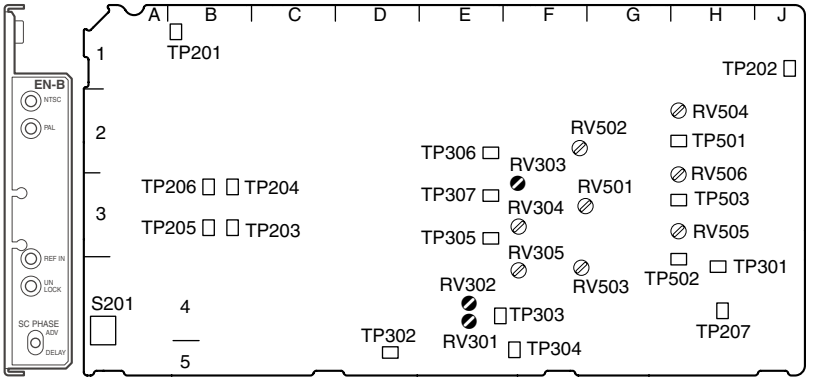

EN-159A/159B board (A side and panel side)

3-5-2. PIX Output Level Adjustment

Measures : SD waveform monitor (NTSC or PAL)

Note

The adjustment can be performed using PIX on page "C09" of the configuration menu. (Fine-adjustment can be performed when used as a system.)

Preparation

To be extended : EN-159A/159B board (front side)

Adjustment Procedure

1. Video level adjustment
   Measuring point : PIX OUT connector/VDA-64A board
   Adjusting point : ⊘RV304 (F-3)/EN-159A/159B board
   Specifications : A = 100 ±1 IRE
   (terminated at 75 Ω) (for NTSC)
   A = 700 ±7 mV
   (terminated at 75 Ω) (for PAL)

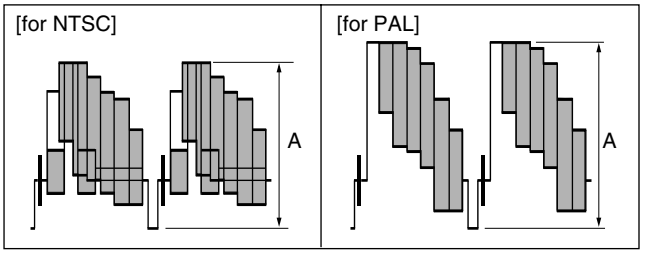

3-5-3. WF Output Level Adjustment

Measures : SD waveform monitor (NTSC or PAL)

Note

The adjustment can be performed using WFM on page "C09" of the configuration menu. (Fine-adjustment can be performed when used as a system.)

Preparation

To be extended : EN-159A/159B board (front side)

Adjustment Procedure

1. Video level adjustment
   Measuring point : WF OUT connector/VDA-64A board
   Adjusting point : ⊘RV305 (F-4)/EN-159A/159B board
   Specifications : A = 100 ±1 IRE
   (terminated at 75 Ω) (for NTSC)
   A = 700 ±7 mV
   (terminated at 75 Ω) (for PAL)

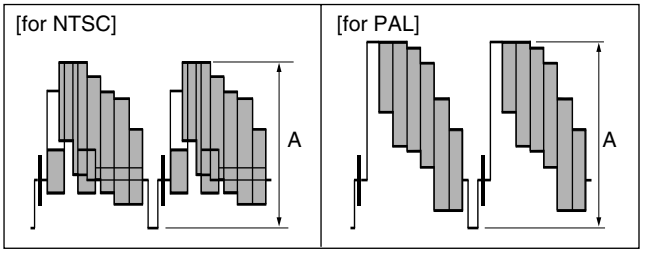

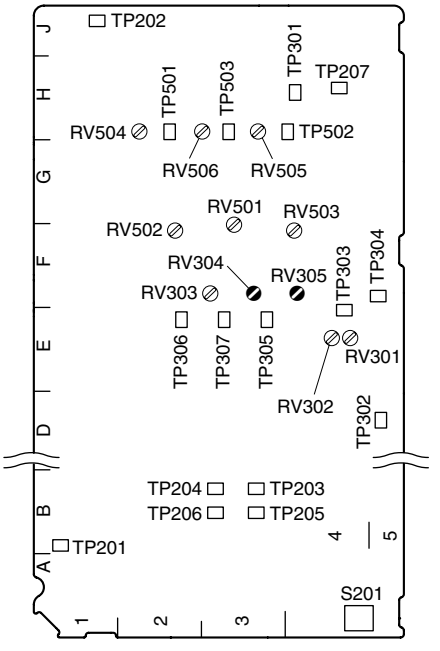

EN-159A/159B board (A side)

3-5-4. GRB Output Level Adjustment

Measure : SD waveform monitor (NTSC or PAL)

Note

The adjustment can be performed using G/Y LEVEL, B/B-Y LEVEL, or R/R-Y LEVEL on page “C09” of the configuration menu. (Fine-adjustment can be performed when used as a system.)

Preparation

- To be extended : EN-159B board (front side)
- Select RGB in the OUTPUT FORMAT on page “S03” of the system operation menu.

  Note

  This menu appears when the EN-159B board and the VDA-64C board are inserted.

Adjustment Procedure

1. G signal level adjustment
   Measuring point : G/Y connector/VDA-64C board
   Adjusting point : ◓RV506 (COMPONENT G/Y LEVEL)/EN-159B board
   Specifications : A = 700 ±5 mV p-p (terminated at 75 Ω) (100% color bar)

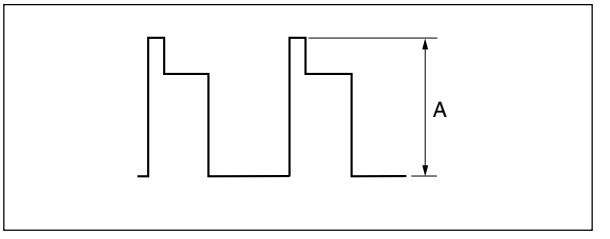

2. R signal level adjustment
   Measuring point : R/R-Y connector/VDA-64C board
   Adjusting point : ◓RV504 (COMPONENT R/R-Y LEVEL)/EN-159B board
   Specifications : B = 700 ±5 mV p-p (terminated at 75 Ω) (100% color bar)

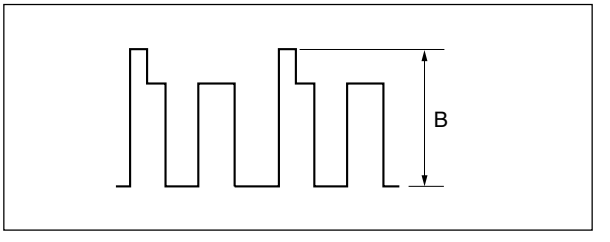

3. B signal level adjustment
   Measuring point : B/B-Y connector/VDA-64C board
   Adjusting point : ◓RV505 (COMPONENT B/B-Y LEVEL)/EN-159B board
   Specifications : C = 700 ±5 mV p-p (terminated at 75 Ω) (100% color bar)

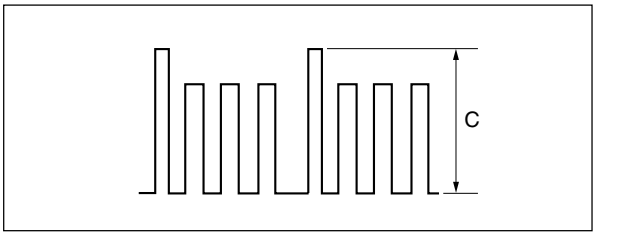

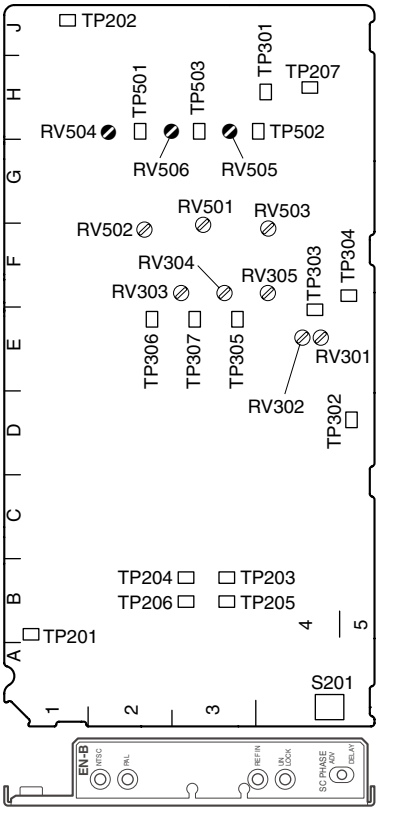

EN-159B board (A side and panel side)

3-5-5. Y/R-Y/B-Y Output Level Adjustment

Measure : SD waveform monitor (NTSC)

Note

The GRB output level adjustment (section 3-5-4) should be completed.

Preparation

- To be extended : EN-159B board (front side)
- Select ON/OFF using SETUP on page “C08” of the configuration menu.
- Select YCD in the OUTPUT FORMAT on page “S03” of the system operation menu.

Adjustment Procedure

1. Y signal level adjustment

   Note

   Perform this adjustment only when SETUP on page “C08” of the configuration menu is set to ON.
   Measuring point : G/Y connector/VDA-64C board
   Adjusting point : ⊘RV501 (F-3)/EN-159B board
   Specifications : A =714 mV ±5 mV (terminated at 75 Ω) (100% (Y) color bar)

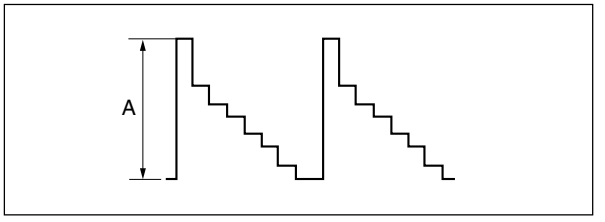

2. R-Y signal level adjustment
   Measuring point : R/R-Y connector/VDA-64C board
   Adjusting point : ⊘RV502 (F-2)/EN-159B board
   Specifications : B = 756 ±5 mV (SET UP : OFF) (terminated at 75 Ω)
   B = 700 ±5 mV (SET UP : ON) (terminated at 75 Ω)

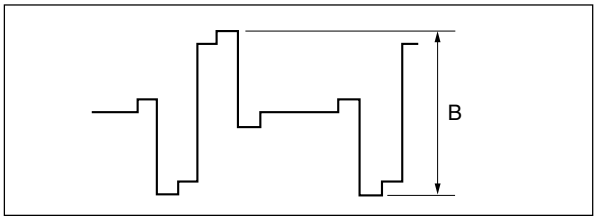

3. B-Y signal level adjustment
   Measuring point : B/B-Y connector/VDA-64C board
   Adjusting point : ⊘RV503 (F-4)/EN-159B board
   Specifications : C = 756 ±5 mV (SET UP : OFF) (terminated at 75 Ω)
   C = 700 ±5 mV (SET UP : ON) (terminated at 75 Ω)

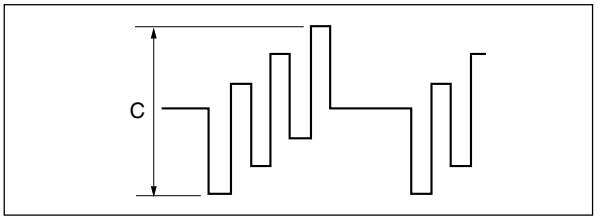

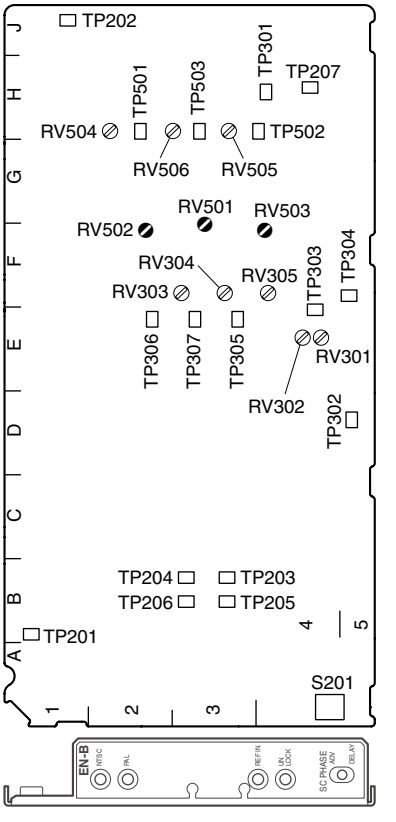

EN-159B board (A side and panel side)

Section 4
Spare Parts

4-1. Notes on Repair Parts

1. Safety Related Components Warning

WARNING

Components marked ⚠ are critical to safe operation. Therefore, specified parts should be used in the case of replacement.

2. Standardization of Parts

Some repair parts supplied by Sony differ from those used for the unit. These are because of parts commonality and improvement.
Parts list has the present standardized repair parts.

3. Stock of Parts

Parts marked with “o” at SP (Supply Code) column of the spare parts list may not be stocked. Therefore, the delivery date will be delayed.

4. Harness

Harnesses with no part number are not registered as spare parts.

4-1. 補修部品注意事項

1. 安全重要部品

⚠警告

⚠印のついた部品は安全性を維持するために重要な部品です。したがって，交換する時は必ず指定の部品を使ってください。

2. 部品の共通化

ソニーから供給する補修用部品は，セットに使われているものと異なることがあります。
これは部品の共通化，改良等によるものです。
部品表には現時点での共通化された補修用部品が記載されています。

3. 部品の在庫

部品表のSP (Supply code) 欄に“o”で示される部品は在庫していないことがあり，納期が長くなることがあります。

4. ハーネス

部品番号が記載されていないハーネスは，サービス部品として登録されていません。

4-2. Exploded Views

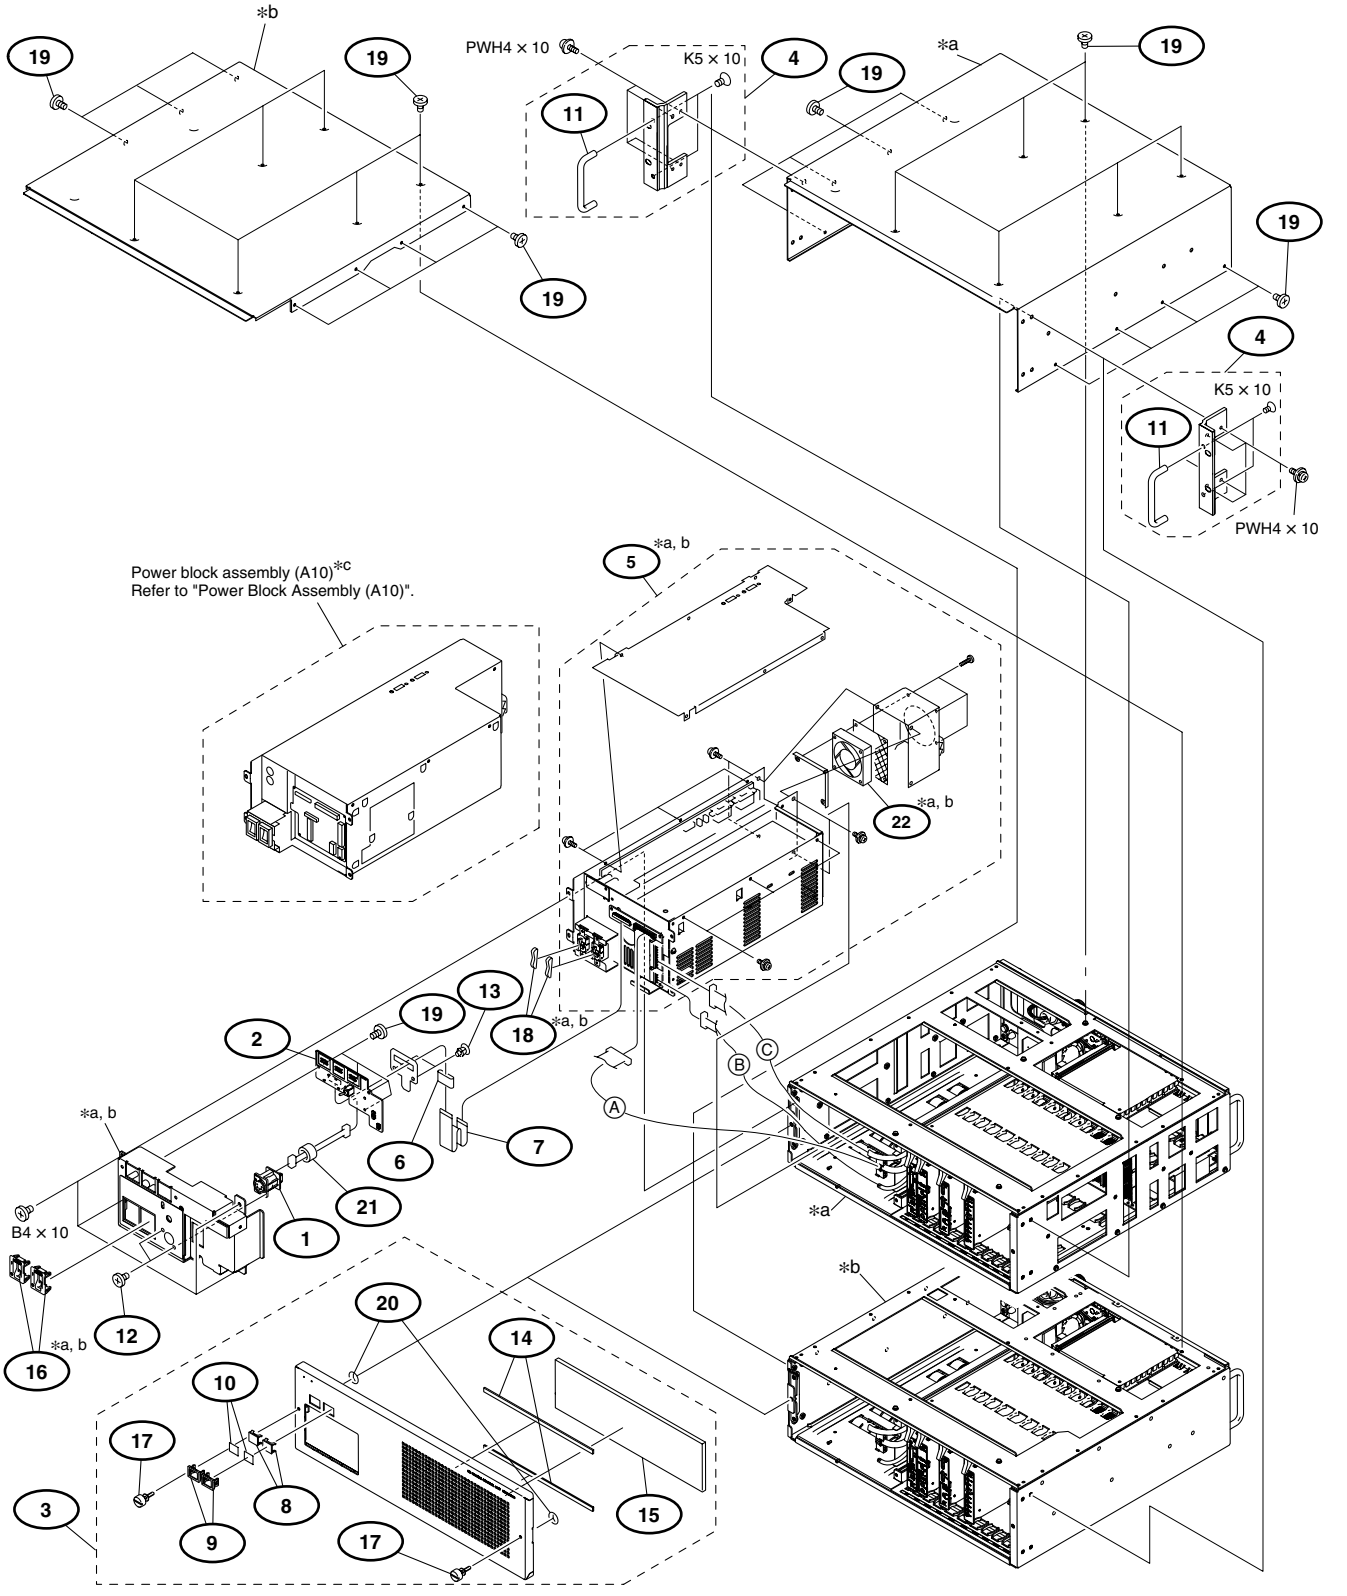

*a: Serial No.10001 through 13999 (HDCU1000: UC)
30001 through 33999 (HDCU1000: J)
40001 through 40999 (HDCU1000: CE)
50001 through 51999 (HDCU1080: CN)

*b: Serial No.14001 through 15999 (HDCU1000: UC)
34001 through 35999 (HDCU1000: J)
41001 through 429999 (HDCU1000: CE)
50001 through 51999 (HDCU1000: E3)
60001 through 61999 (HDCU1000: E2)
52001 through 53999 (HDCU1080: CN)

*c: Serial No.16001 and Higher (HDCU1000: UC)
36001 and Higher (HDCU1000: J)
430001 and Higher (HDCU1000: CE)
52001 and Higher (HDCU1000: E3)
62001 and Higher (HDCU1000: E2)
54001 and Higher (HDCU1080: CN)

No.	Part No.	SP	Description
1	A-1129-236-A	s	MOUNTED CIRCUIT BOARD, CN-2700
2	A-1129-307-A	s	MOUNTED CIRCUIT BOARD, AU-302
3	A-1129-464-A	s	FRONT PANEL ASSY (for HDCU1000)
	A-1194-778-A	s	FRONT PANEL ASSY (CN) (for HDCU1080)
4	X-2127-218-4	o	ANGLE (3U) ASSY, RACK
5 *a,b ⚠	1-468-945-11	s	REGULATOR, SWITCHING
6	1-500-418-11	s	CORE
7	1-831-657-11	s	CABLE, FLEXIBLE FLAT (26 CORE)
8	2-139-192-01	s	FRAME, INDICATOR WINDOW
9	2-139-193-02	s	WINDOW INDICATOR
10	2-249-353-00	s	COVER, LAMP
11	2-378-801-01	s	HANDLE
12	3-165-162-01	s	SCREW (+P 2.6X5) (TYPE 1) (ST)
13	3-531-576-21	s	RIVET, NYLON
14	3-602-574-01	o	TAPE2, ADHENSIVE
15	3-628-958-01	o	FILTER
16	3-681-054-01	o	POWER SW GUARD
17	3-687-887-01	s	SCREW (M 4X20) (COPPER)
18 *a,b	3-688-814-01	s	CAP, SWITCH
19	3-725-295-21	s	SCREW, (+) (B3)
20	3-650-537-00	o	WASHER (PLA)
21	1-543-751-11	o	CORE (TROIDAL)
22 *a,b ⚠	9-885-092-89	s	DC FAN
	7-682-275-09	s	SCREW +K 5X10
	7-682-562-04	s	SCREW +B 4X10
	7-682-904-21	s	SCREW +PWH 4X10

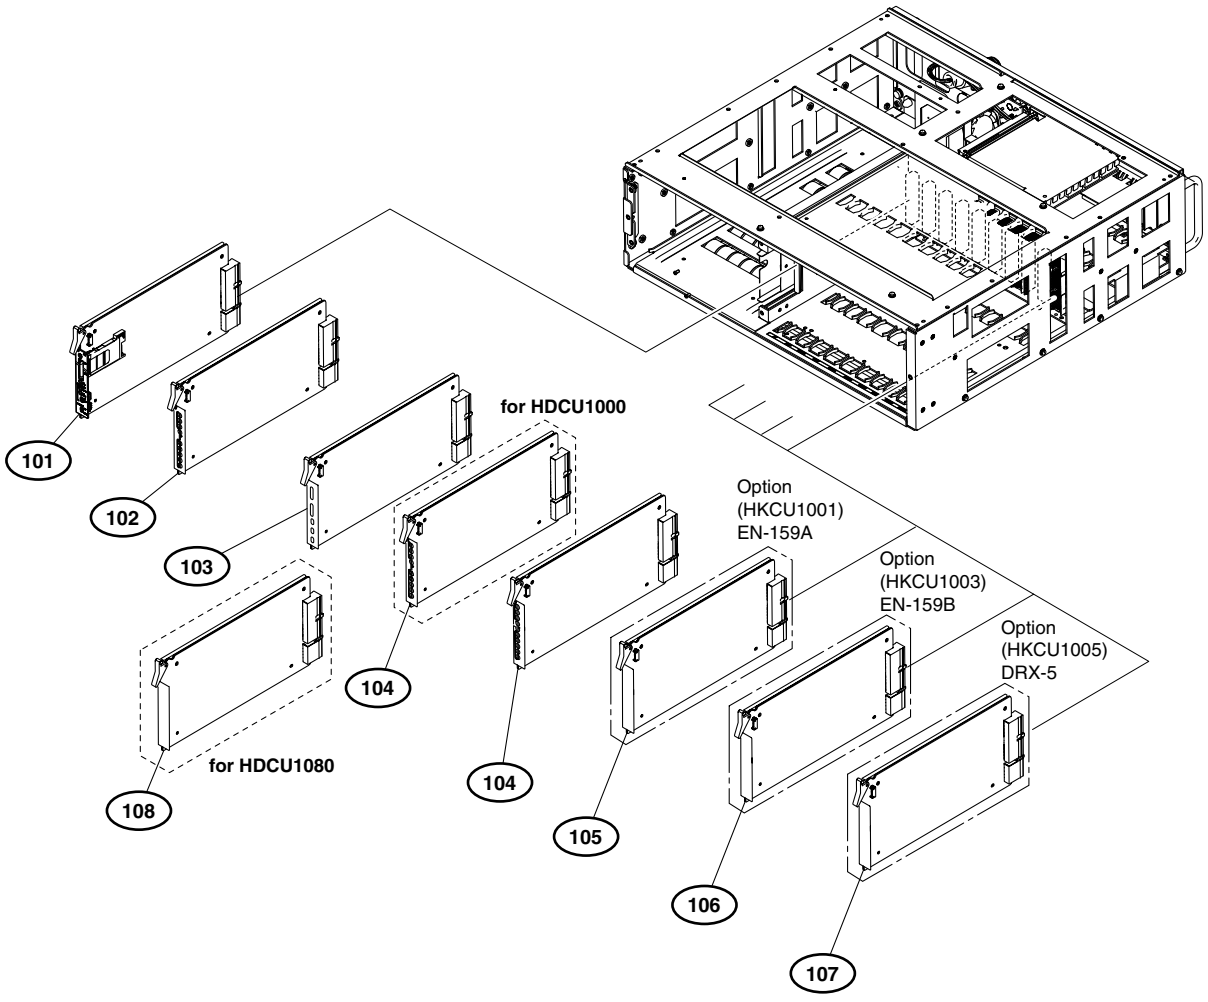

No.	Part No.	SP	Description
101	A-1129-299-A	s	MOUNTED CIRCUIT BOARD, AT-167
102	A-1129-300-A	s	MOUNTED CIRCUIT BOARD, AVP-6
103	A-1129-301-A	s	MOUNTED CIRCUIT BOARD, DTX-5
104	A-1129-302-A	s	MOUNTED CIRCUIT BOARD, DRX-5
105	A-1132-789-A	s	MOUNTED CIRCUIT BOARD, EN-159A (HKCU1001) (OPTION)
106	A-1132-790-A	s	MOUNTED CIRCUIT BOARD, EN-159B (HKCU1003) (OPTION)
107	A-1129-302-A	s	MOUNTED CIRCUIT BOARD, DRX-5 (HKCU1005) (OPTION)
108	A-1179-817-A	s	MOUNTED CIRCUIT BOARD, DU-390 (for HDCU1080)

Rear Panel (HDCU1000/1080)

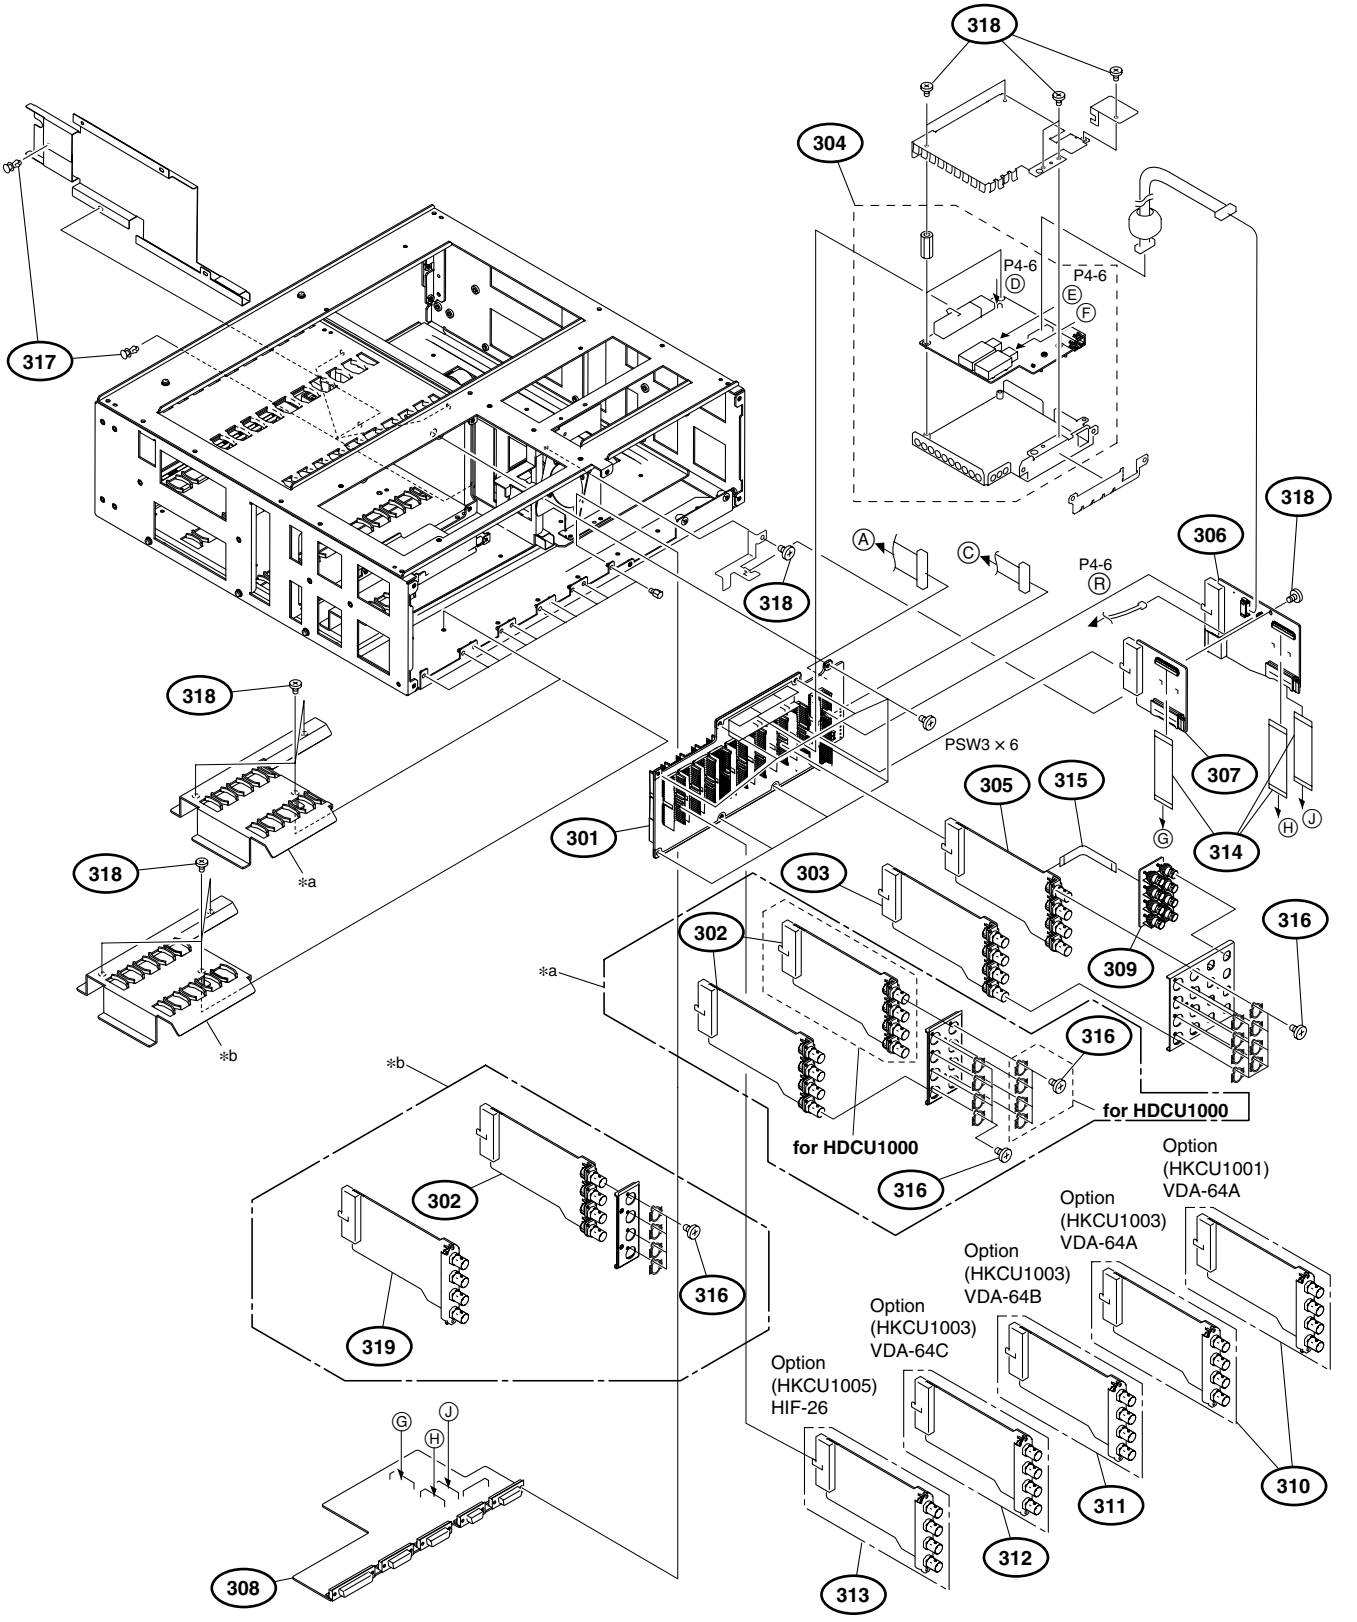

*a: Serial No.10001 through 13999 (HDCU1000: UC)
30001 through 33999 (HDCU1000: J)
40001 through 40999 (HDCU1000: CE)
50001 through 51999 (HDCU1080: CN)
*b: Serial No.14001 and Higher (HDCU1000: UC)
34001 and Higher (HDCU1000: J)
41001 and Higher (HDCU1000: CE)
50001 and Higher (HDCU1000: E3)
60001 and Higher (HDCU1000: E2)
52001 and Higher (HDCU1080: CN)

```
*a: Serial No.10001 through 13999 (HDCU1000: UC)
              30001 through 33999 (HDCU1000: J)
              40001 through 40999 (HDCU1000: CE)
              50001 through 51999 (HDCU1080: CN)
*b: Serial No.14001 and Higher (HDCU1000: UC)
              34001 and Higher (HDCU1000: J)
              41001 and Higher (HDCU1000: CE)
              50001 and Higher (HDCU1000: E3)
              60001 and Higher (HDCU1000: E2)
              52001 and Higher (HDCU1080: CN)

No.    Part No.    SP Description

301 *a A-1129-220-A s  MOUNTED CIRCUIT BOARD, MB-1071
    *b A-1358-339-A s  MOUNTED CIRCUIT BOARD, MB-1071A
302    A-1129-304-A s  MOUNTED CIRCUIT BOARD, HIF-25
303    A-1129-305-A s  MOUNTED CIRCUIT BOARD, SDI-85
304    A-1129-303-B s  MOUNTED CIRCUIT BOARD, SDP-12 (for HDCU1000)
       A-1184-046-A s  MOUNTED CIRCUIT BOARD, SDP-12C (for HDCU1080)
305  * A-1161-074-A s  MOUNTED CIRCUIT BOARD, SDI-86G (GOLD)
     * A-1129-306-A s  MOUNTED CIRCUIT BOARD, SDI-86 (SILVER)

306  * A-1161-076-A s  MOUNTED CIRCUIT BOARD, VIF-34G (GOLD)
     * A-1129-229-A s  MOUNTED CIRCUIT BOARD, VIF-34 (SILVER)
307  * A-1161-078-A s  MOUNTED CIRCUIT BOARD, ADO-10G (GOLD)
     * A-1129-230-A s  MOUNTED CIRCUIT BOARD, ADO-10 (SILVER)
308  * A-1161-080-A s  MOUNTED CIRCUIT BOARD, CNB-21G (GOLD)
     * A-1129-235-A s  MOUNTED CIRCUIT BOARD, CNB-21 (SILVER)
309  * A-1161-082-A s  MOUNTED CIRCUIT BOARD, CN-2674G (GOLD)
     * A-1129-233-A s  MOUNTED CIRCUIT BOARD, CN-2674 (SILVER)
310    A-1132-791-A s  MOUNTED CIRCUIT BOARD, VDA-64A (HKCU1001/HKCU1003) (OPTION)

311    A-1132-792-A s  MOUNTED CIRCUIT BOARD, VDA-64B (HKCU1003) (OPTION)
312    A-1132-793-A s  MOUNTED CIRCUIT BOARD, VDA-64C (HKCU1003) (OPTION)
313    A-1132-794-A s  MOUNTED CIRCUIT BOARD, HIF-26 (HKCU1005) (OPTION)
314  * 1-831-087-11 s  CABLE, FLEXIBLE FLAT (50 CORE) (GOLD)
     * 1-830-799-11 s  CABLE, FLEXIBLE FLAT (50 CORE) (SILVER)
315  * 1-831-666-11 s  CABLE, FLEXIBLE FLAT (15 CORE) (GOLD)
     * 1-830-801-11 s  CABLE, FLEXIBLE FLAT (15 CORE) (SILVER)

316    3-364-941-01 s  SCREW (+B) (2.6X5), NYLOK
317    3-531-576-21 s  RIVET, NYLON
318    3-725-295-21 s  SCREW, (+) (B3)
319 *b A-1132-794-A s  MOUNTED CIRCUIT BOARD, HIF-26


       7-682-947-01 s  SCREW +PSW 3X6
```

*:「1-2. 部品交換時の注意事項」を参照してください。
* : Refer to Section 1-2, "Note for Replacing Parts".

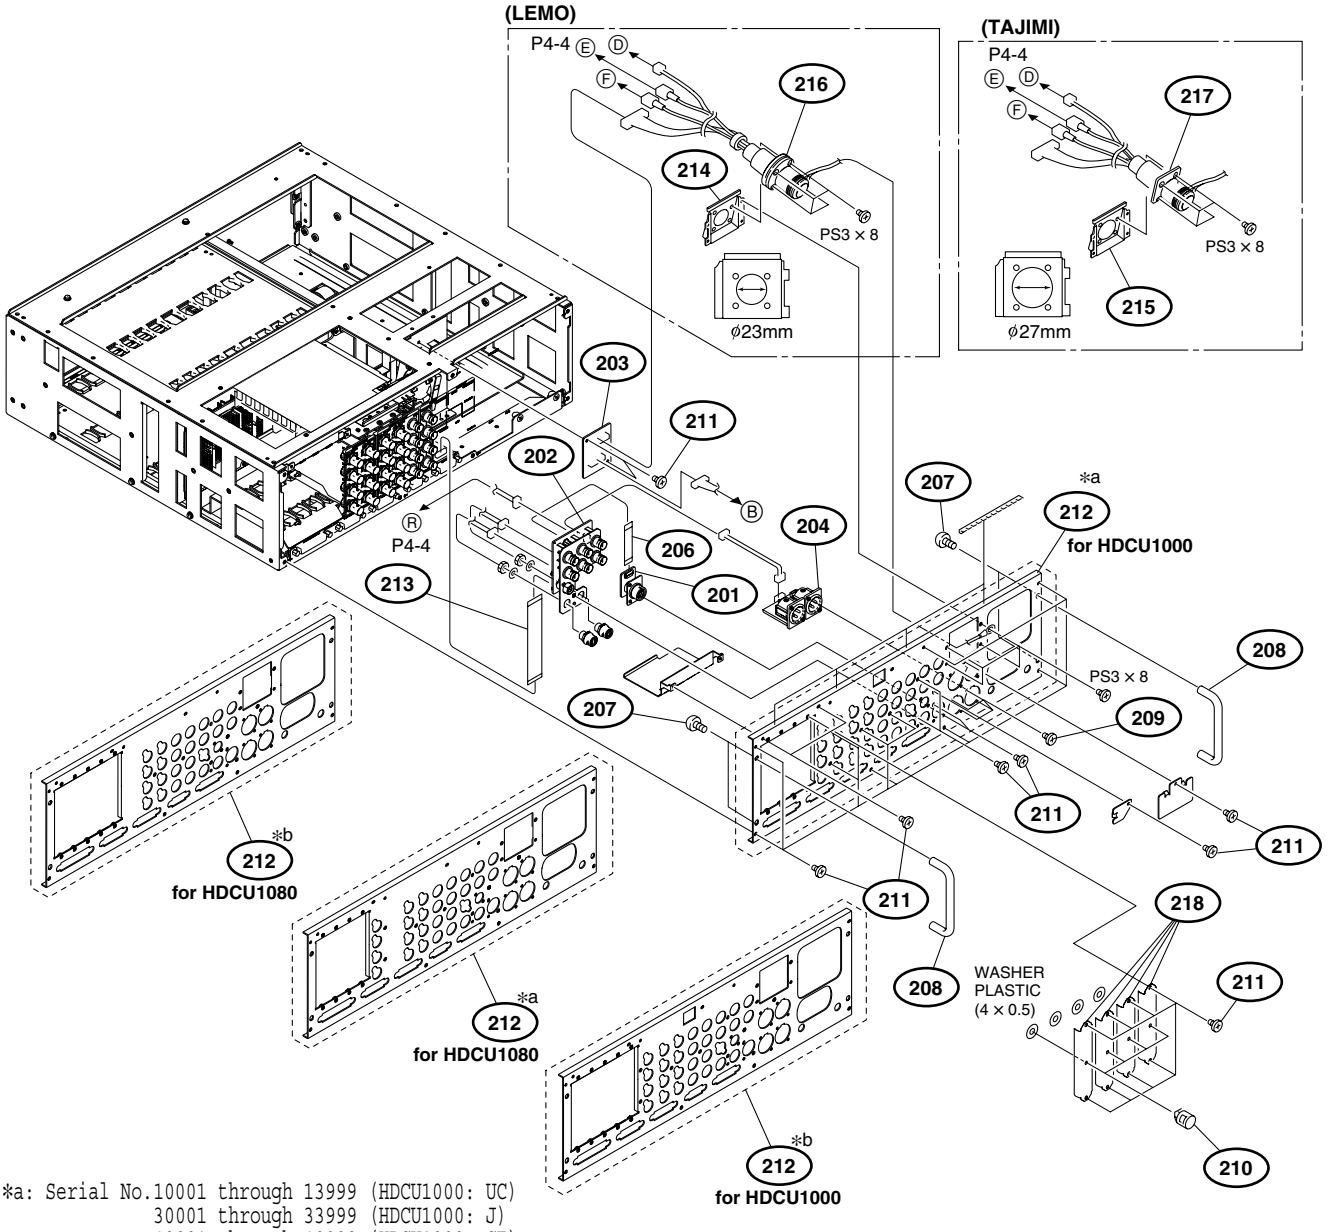

*a: Serial No.10001 through 13999 (HDCU1000: UC)
30001 through 33999 (HDCU1000: J)
40001 through 40999 (HDCU1000: CE)
50001 through 51999 (HDCU1080: CN)
*b: Serial No.14001 and Higher (HDCU1000: UC)
34001 and Higher (HDCU1000: J)
41001 and Higher (HDCU1000: CE)
50001 and Higher (HDCU1000: E3)
60001 and Higher (HDCU1000: E2)
52001 and Higher (HDCU1080: CN)

No.	Part No.	SP	Description
201	＊A-1161-079-A	s	MOUNTED CIRCUIT BOARD, CN-2805G (GOLD)
	＊A-1129-238-A	s	MOUNTED CIRCUIT BOARD, CN-2805 (SILVER)
202	＊A-1161-081-A	s	MOUNTED CIRCUIT BOARD, CN-2672G (GOLD)
	＊A-1129-231-A	s	MOUNTED CIRCUIT BOARD, CN-2672 (SILVER)
203	A-1129-237-A	s	MOUNTED CIRCUIT BOARD, CN-2718
204	A-1129-232-A	s	MOUNTED CIRCUIT BOARD, CN-2673
206	＊1-831-666-11	s	CABLE, FLEXIBLE FLAT (15 CORE) (GOLD)
	＊1-830-801-11	s	CABLE, FLEXIBLE FLAT (15 CORE) (SILVER)
207	2-148-622-01	s	SCREW (+P 5X8)
208	2-378-801-01	s	HANDLE
209	3-165-162-01	s	SCREW (+P 2.6X5) (TYPE 1) (ST)
210	3-682-057-11	s	SPACER (SMALL)
211	3-725-295-21	s	SCREW, (+) (B3)

No.	Part No.	SP	Description
212	＊a 3-872-832-02	s	REAR PANEL (for HDCU1000)
	＊a 3-872-832-21	s	REAR PANEL (for HDCU1080)
	＊b 3-872-832-03	s	REAR PANEL (for HDCU1000)
	＊b 3-872-832-22	s	REAR PANEL (for HDCU1080)
213	＊1-831-664-11	s	CABLE, FLEXIBLE FLAT (50 CORE) (GOLD)
	＊1-830-798-11	s	CABLE, FLEXIBLE FLAT (50 CORE) (SILVER)
214	3-872-863-02	s	FIBER CN HOLDER (ø23) (LEMO)
215	3-986-571-01	s	FIBER CN HOLDER (ø27) (TAJIMI)
216	⚠ 1-830-747-11	s	CABLE ASSEMBLY, ENCAPSULAT (F) (LEMO)
217	⚠ 1-830-749-11	s	OPTICAL MULTI CABLE ASSEMBLY (TAJIMI)
218	3-620-243-02	s	BLANK PANEL
	7-623-925-11	s	WASHER PLASTIC (4X0.5)
	7-682-648-09	s	SCREW +PS 3X8

＊:「1-2. 部品交換時の注意事項」を参照してください。
＊ : Refer to Section 1-2, "Note for Replacing Parts".

Cover (HDCU1500)

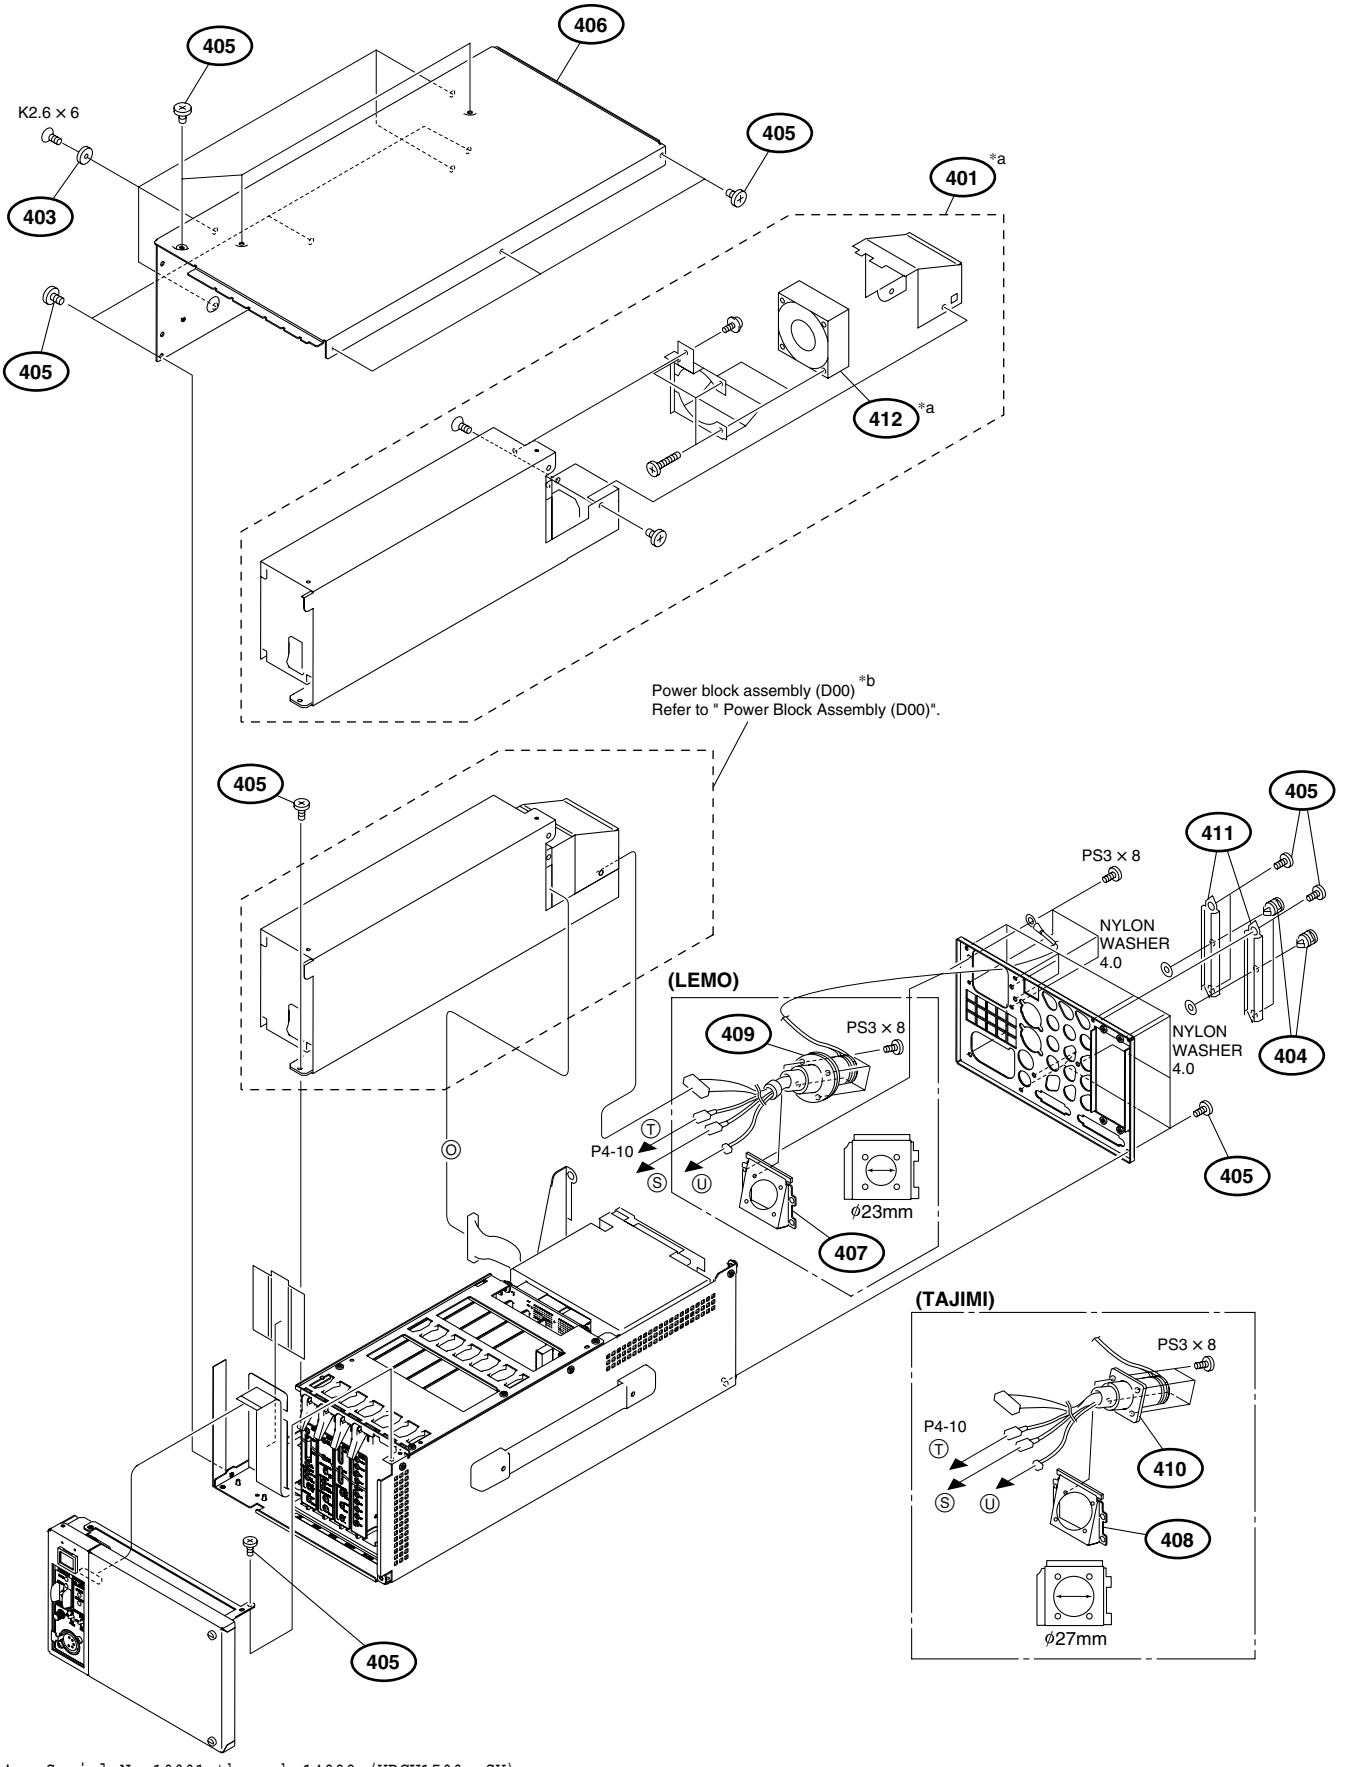

*a: Serial No.10001 through 14999 (HDCU1500: SY)
30001 through 34999 (HDCU1500: J)
*b: Serial No.15001 and Higher (HDCU1500: SY)
35001 and Higher (HDCU1500: J)

No.		Part No.	SP	Description
401	*a ⚠	1-468-935-11	s	POWER UNIT
403		2-382-110-00	o	LEG (PLA)
404		3-682-057-11	s	SPACER (SMALL)
405		3-725-295-21	s	SCREW, (+) (B3)
406		3-872-856-02	s	COVER
407		3-872-863-02	s	FIBER CN HOLDER (ø23) (LEMO)
408		3-986-571-01	s	FIBER CN HOLDER (ø27) (TAJIMI)
409	⚠	1-830-747-11	s	CABLE ASSEMBLY, ENCAPSULAT (F) (LEMO)
410	⚠	1-830-749-11	s	OPTICAL MULTI CABLE ASSEMBLY (TAJIMI)
411		3-620-243-02	s	BLANK PANEL
412	*a	9-885-098-47	s	DC FAN
		7-621-592-00	s	SCREW +K 2.6X6
		7-623-925-11	s	WASHER PLASTIC (4X0.5)
		7-682-648-09	s	SCREW +PS 3X8

Front Panel (HDCU1500)

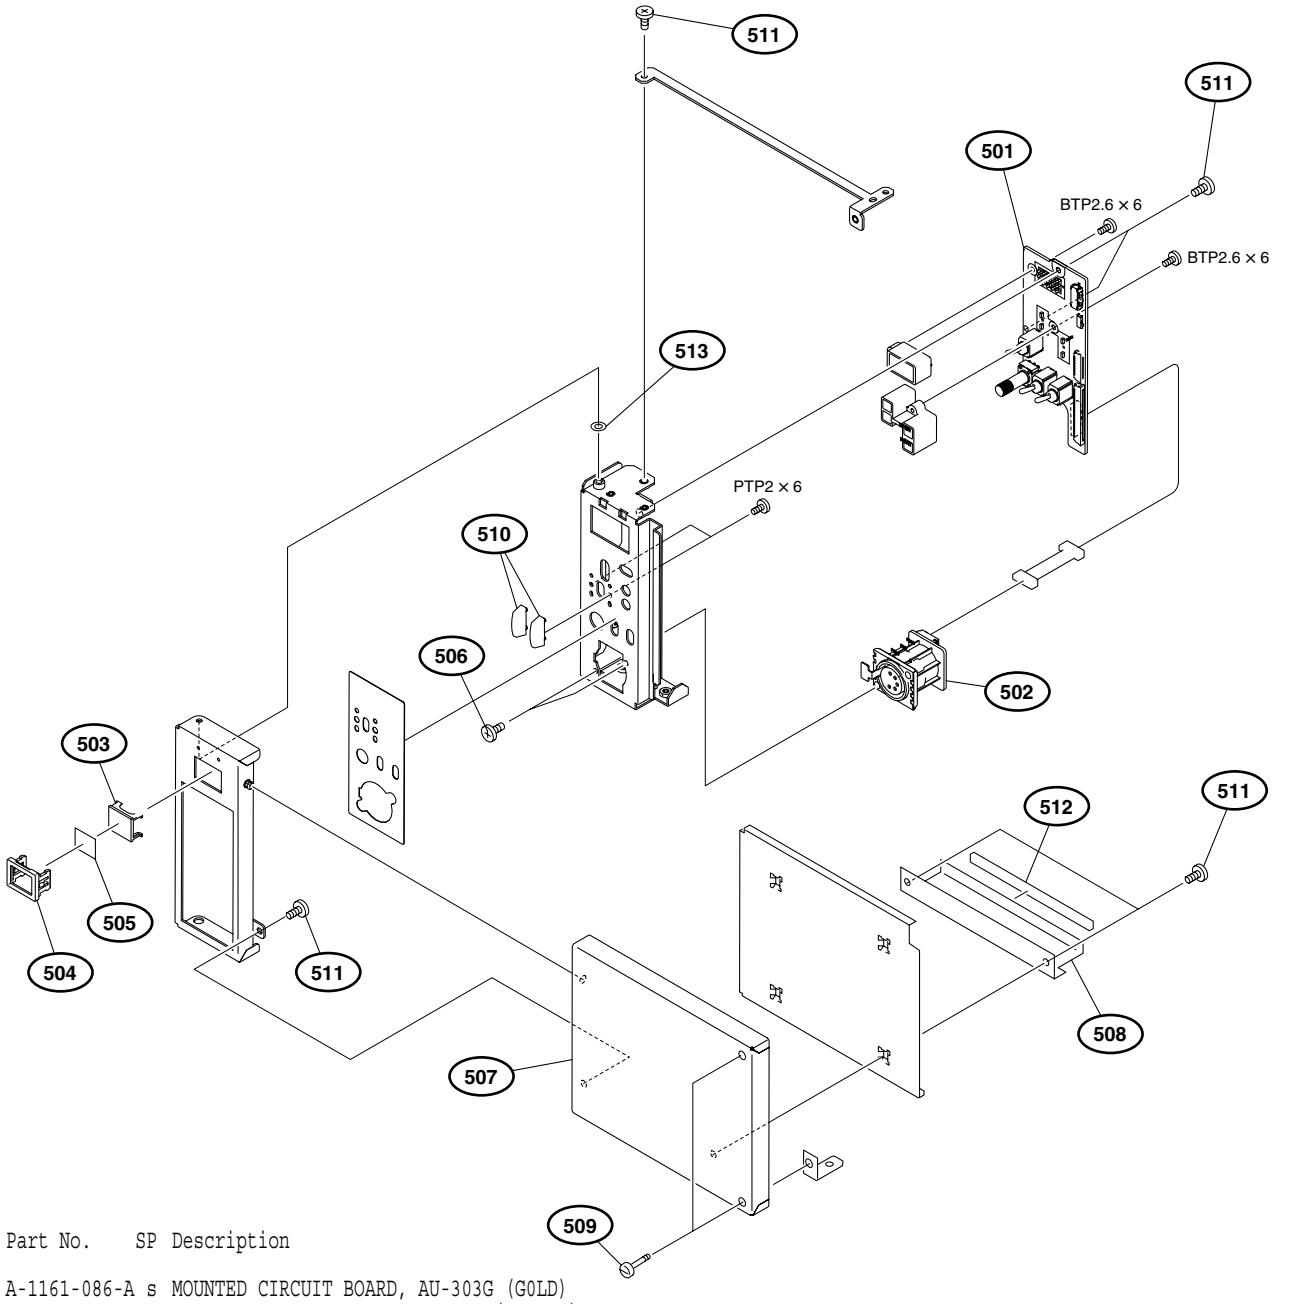

No.	Part No.	SP	Description
501	＊A-1161-086-A	s	MOUNTED CIRCUIT BOARD, AU-303G (G0LD)
	＊A-1129-310-A	s	MOUNTED CIRCUIT BOARD, AU-303 (SILVER)
502	A-1129-286-A	s	MOUNTED CIRCUIT BOARD, CN-2678
503	2-139-192-01	s	FRAME, INDICATOR WINDOW
504	2-139-193-02	s	WINDOW INDICATOR
505	2-249-353-00	s	COVER,LAMP
506	3-165-162-01	s	SCREW(+P 2.6X5)(TYPE 1) (ST)
507	3-677-461-11	s	FRONT PANEL
508	3-677-488-01	s	PWB STOPPER
509	3-697-760-01	o	SCREW,COIN
510	3-717-380-01	o	GUARD, REC
511	3-725-295-21	s	SCREW, (+) (B3)
512	9-911-844-99	o	SHEET, SPONGE
513	3-701-439-21	s	WASHER PLASTIC (3.1X0.5)
	7-685-104-19	s	SCREW +PTP 2X6
	7-685-533-14	s	SCREW +BTP 2.6X6

＊:「1-2. 部品交換時の注意事項」を参照してください。
＊ : Refer to Section 1-2, "Note for Replacing Parts".

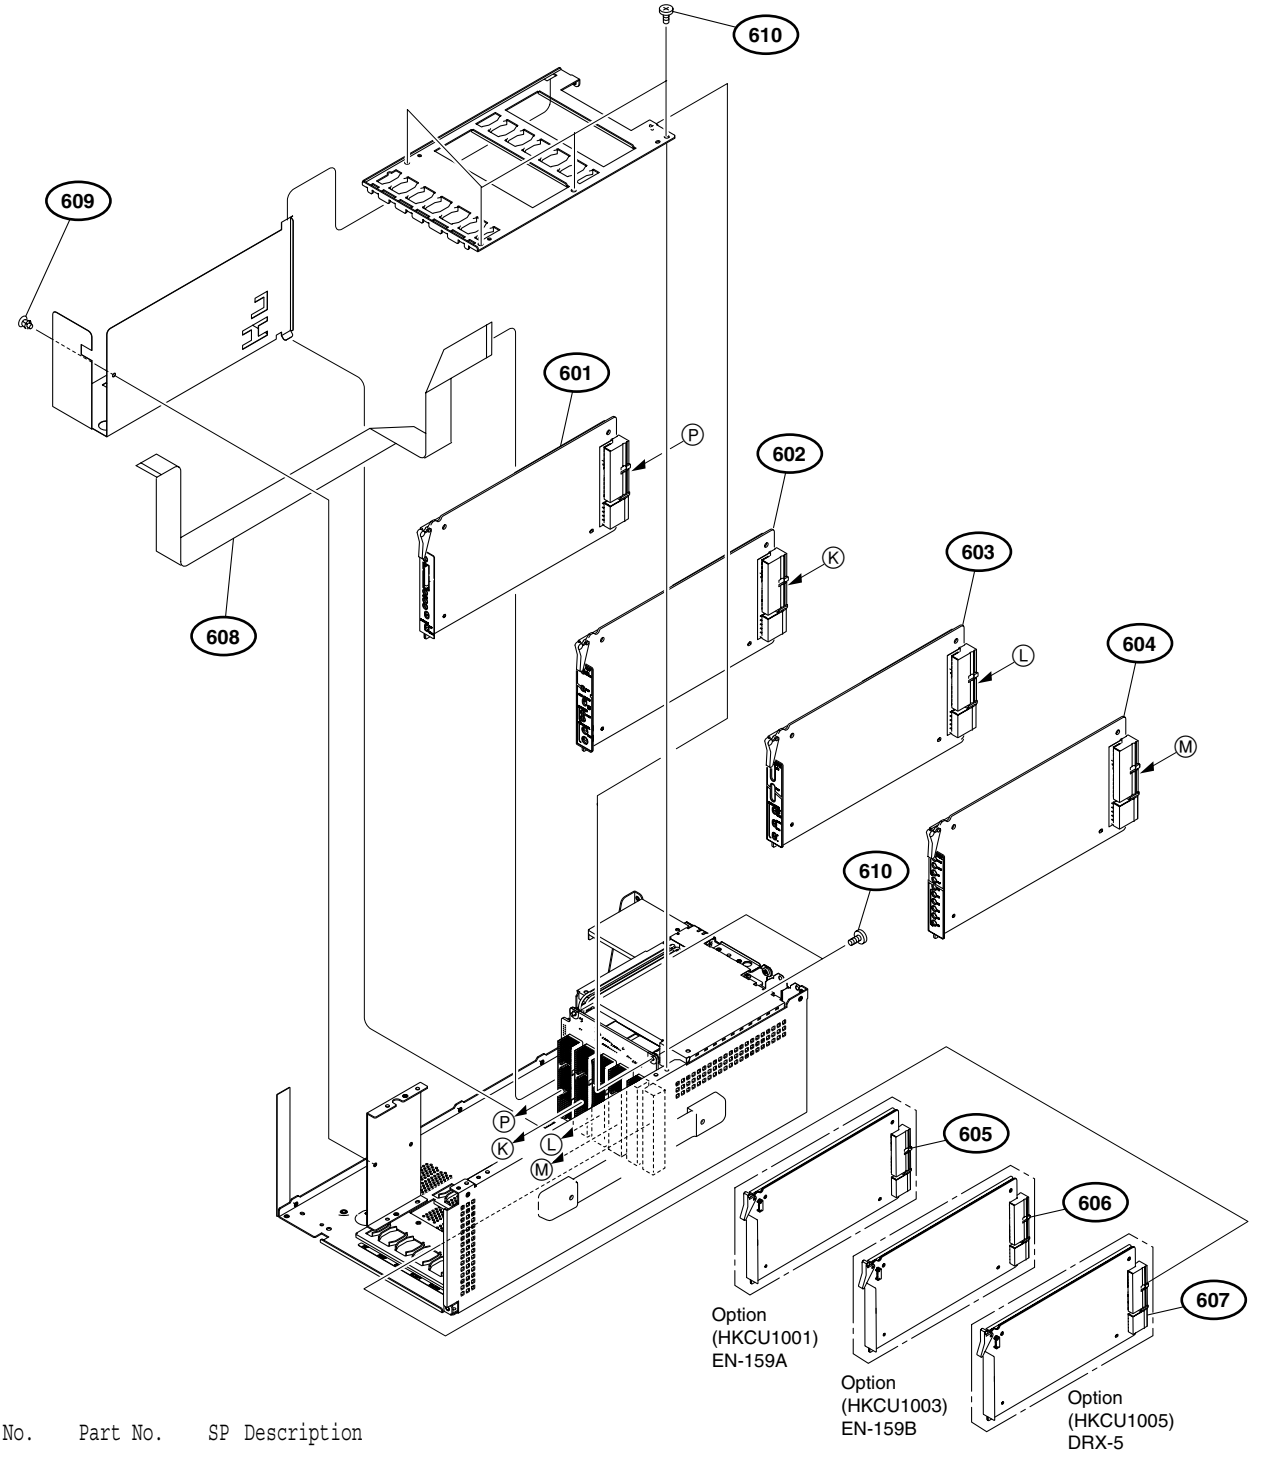

No.	Part No.	SP	Description
601	A-1129-299-A	s	MOUNTED CIRCUIT BOARD, AT-167
602	A-1129-300-A	s	MOUNTED CIRCUIT BOARD, AVP-6
603	A-1129-301-A	s	MOUNTED CIRCUIT BOARD, DTX-5
604	A-1129-302-A	s	MOUNTED CIRCUIT BOARD, DRX-5
605	A-1132-789-A	s	MOUNTED CIRCUIT BOARD, EN-159A (HKCU1001) (OPTION)
606	A-1132-790-A	s	MOUNTED CIRCUIT BOARD, EN-159B (HKCU1003) (OPTION)
607	A-1129-302-A	s	MOUNTED CIRCUIT BOARD, DRX-5 (HKCU1005) (OPTION)
608	＊1-831-665-11	s	CABLE, FLEXIBLE FLAT (45 CORE) (GOLD)
	＊1-830-800-11	s	CABLE, FLEXIBLE FLAT (45 CORE) (SIVER)
609	3-531-576-01	s	RIVET, NYLON
610	3-725-295-21	s	SCREW, (+) (B3)

＊:「1-2. 部品交換時の注意事項」を参照してください。
＊ : Refer to Section 1-2, "Note for Replacing Parts".

Rear Panel (HDCU1500)

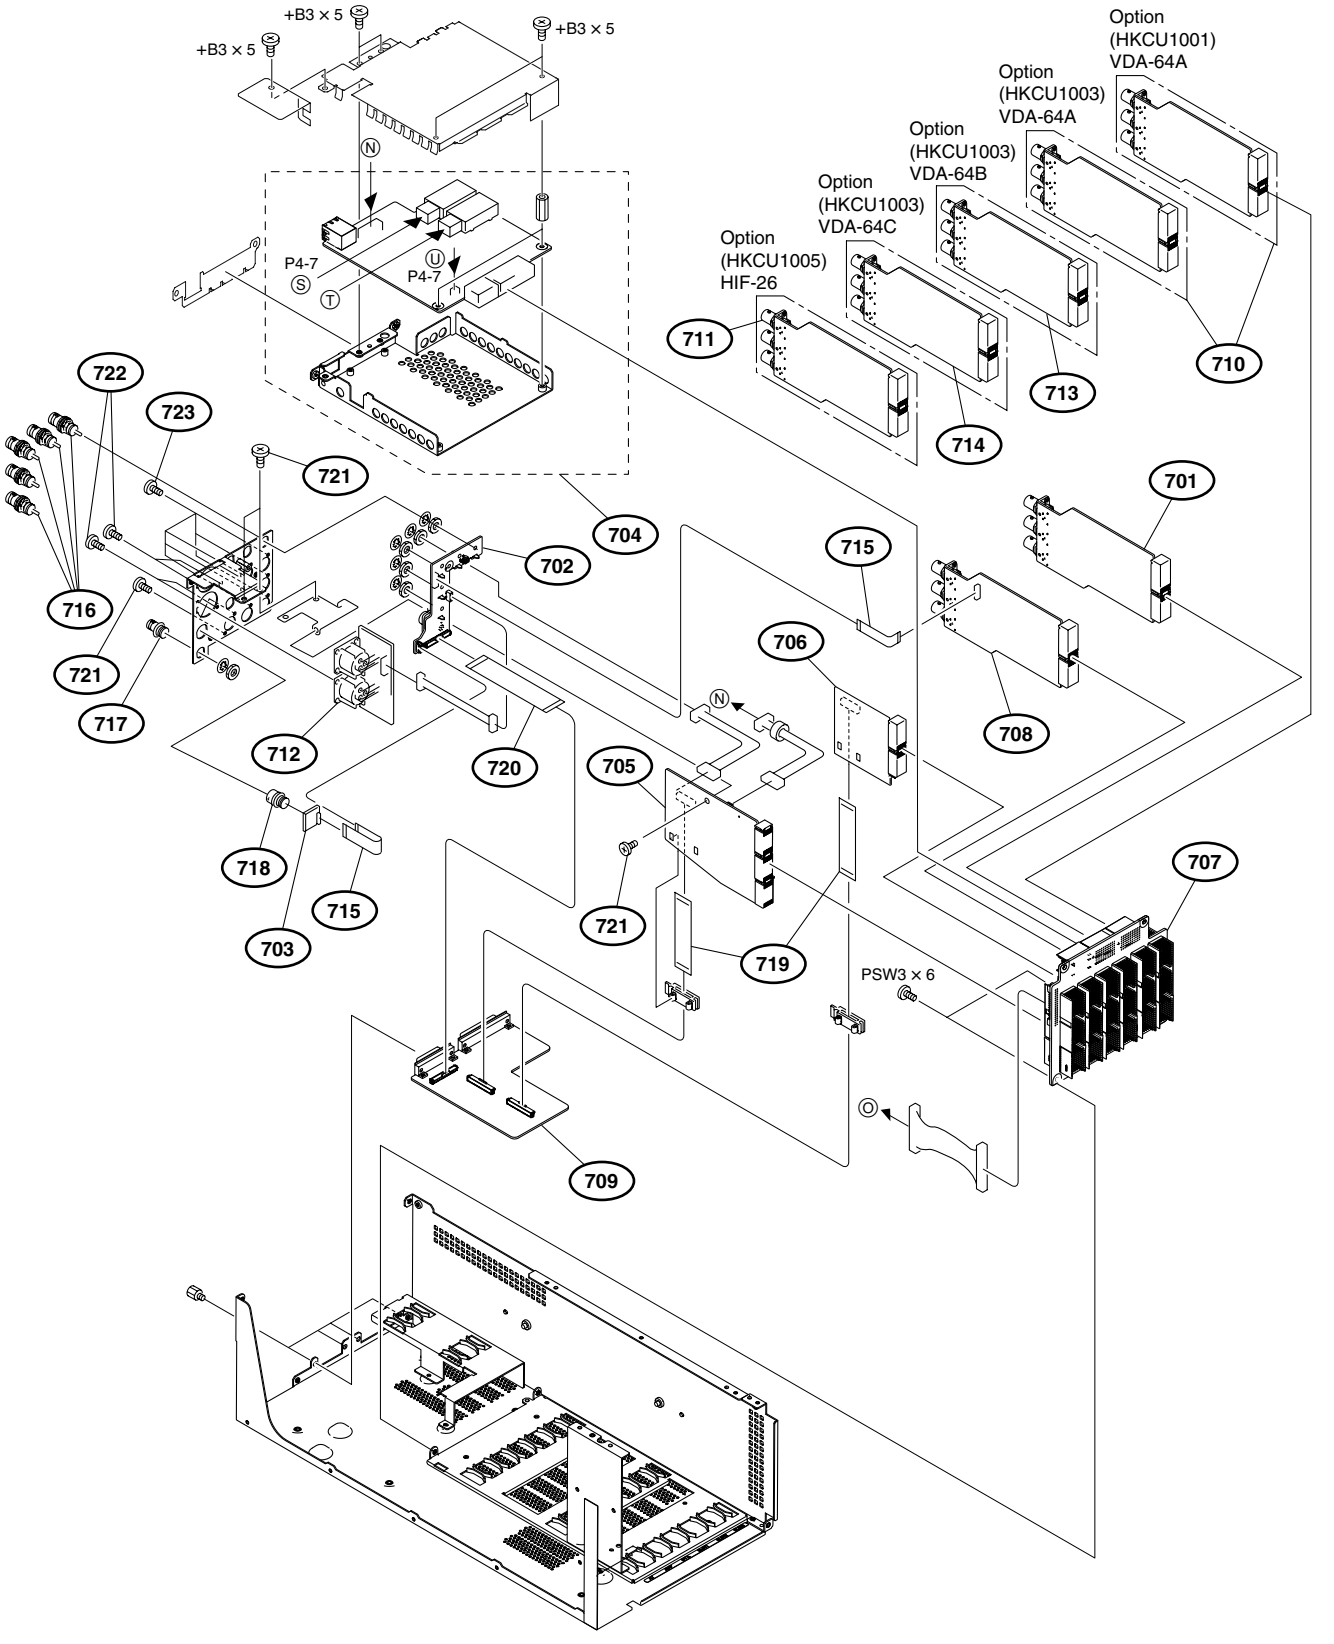

No.	Part No.	SP	Description
701	A-1129-308-A	s	MOUNTED CIRCUIT BOARD, HIF-27
702	※ A-1161-089-A	s	MOUNTED CIRCUIT BOARD, CN-2675G (GOLD)
	※ A-1129-283-A	s	MOUNTED CIRCUIT BOARD, CN-2675 (SILVER)
703	※ A-1161-090-A	s	MOUNTED CIRCUIT BOARD, CN-2677G (GOLD)
	※ A-1129-285-A	s	MOUNTED CIRCUIT BOARD, CN-2677 (SILVER)
704	A-1129-303-B	s	MOUNTED CIRCUIT BOARD, SDP-12
705	※ A-1161-077-A	s	MOUNTED CIRCUIT BOARD, VIF-34BG (GOLD)
	※ A-1151-870-A	s	MOUNTED CIRCUIT BOARD, VIF-34B (SILVER)
706	※ A-1161-078-A	s	MOUNTED CIRCUIT BOARD, ADO-10G (GOLD)
	※ A-1129-230-A	s	MOUNTED CIRCUIT BOARD, ADO-10 (SILVER)
707	※ A-1161-083-A	s	MOUNTED CIRCUIT BOARD, MB-1072G (GOLD)
	※ A-1129-279-A	s	MOUNTED CIRCUIT BOARD, MB-1072 (SILVER)
708	※ A-1161-084-A	s	MOUNTED CIRCUIT BOARD, SDI-87G (GOLD)
	※ A-1129-309-A	s	MOUNTED CIRCUIT BOARD, SDI-87 (SILVER)
709	※ A-1161-088-A	s	MOUNTED CIRCUIT BOARD, CNB-22G (GOLD)
	※ A-1129-287-A	s	MOUNTED CIRCUIT BOARD, CNB-22 (SILVER)
710	A-1132-791-A	s	MOUNTED CIRCUIT BOARD, VDA-64A (HKCU1001/HKCU1003) (OPTION)
711	A-1132-794-A	s	MOUNTED CIRCUIT BOARD, HIF-26(HKCU1005) (OPTION)
712	A-1129-284-A	s	MOUNTED CIRCUIT BOARD, CN-2676
713	A-1132-792-A	s	MOUNTED CIRCUIT BOARD, VDA-64B (HKCU1003) (OPTION)
714	A-1132-793-A	s	MOUNTED CIRCUIT BOARD, VDA-64C (HKCU1003) (OPTION)
715	※ 1-831-666-11	s	CABLE, FLEXIBLE FLAT (15 CORE) (GOLD)
	※ 1-830-801-11	s	CABLE, FLEXIBLE FLAT (15 CORE) (SILVER)
716	1-561-336-00	s	CONNECTOR,COAXIAL
717	1-766-696-11	o	CONNECTOR, ROUND TYPE 8P
718	1-819-262-11	s	CONNECTOR, ROUND TYPE 12P
719	※ 1-831-087-11	s	CABLE, FLEXIBLE FLAT (50 CORE) (GOLD)
	※ 1-830-799-11	s	CABLE, FLEXIBLE FLAT (50 CORE) (SILVER)
720	※ 1-831-664-11	s	CABLE, FLEXIBLE FLAT (50 CORE) (GOLD)
	※ 1-830-798-11	s	CABLE, FLEXIBLE FLAT (50 CORE) (SILVER)
721	3-725-295-21	s	SCREW, (+) (B3)
722	3-165-162-01	s	SCREW (+P 2.6X5) (TYPE 1) (ST)
723	3-364-941-01	s	SCREW (+B) (2.6X5), NYLOK
	7-682-947-01	s	SCREW +PSW 3X6

※:「1−2. 部品交換時の注意事項」を参照してください。
※ : Refer to Section 1-2, "Note for Replacing Parts".

Power Block Assemby (A10)

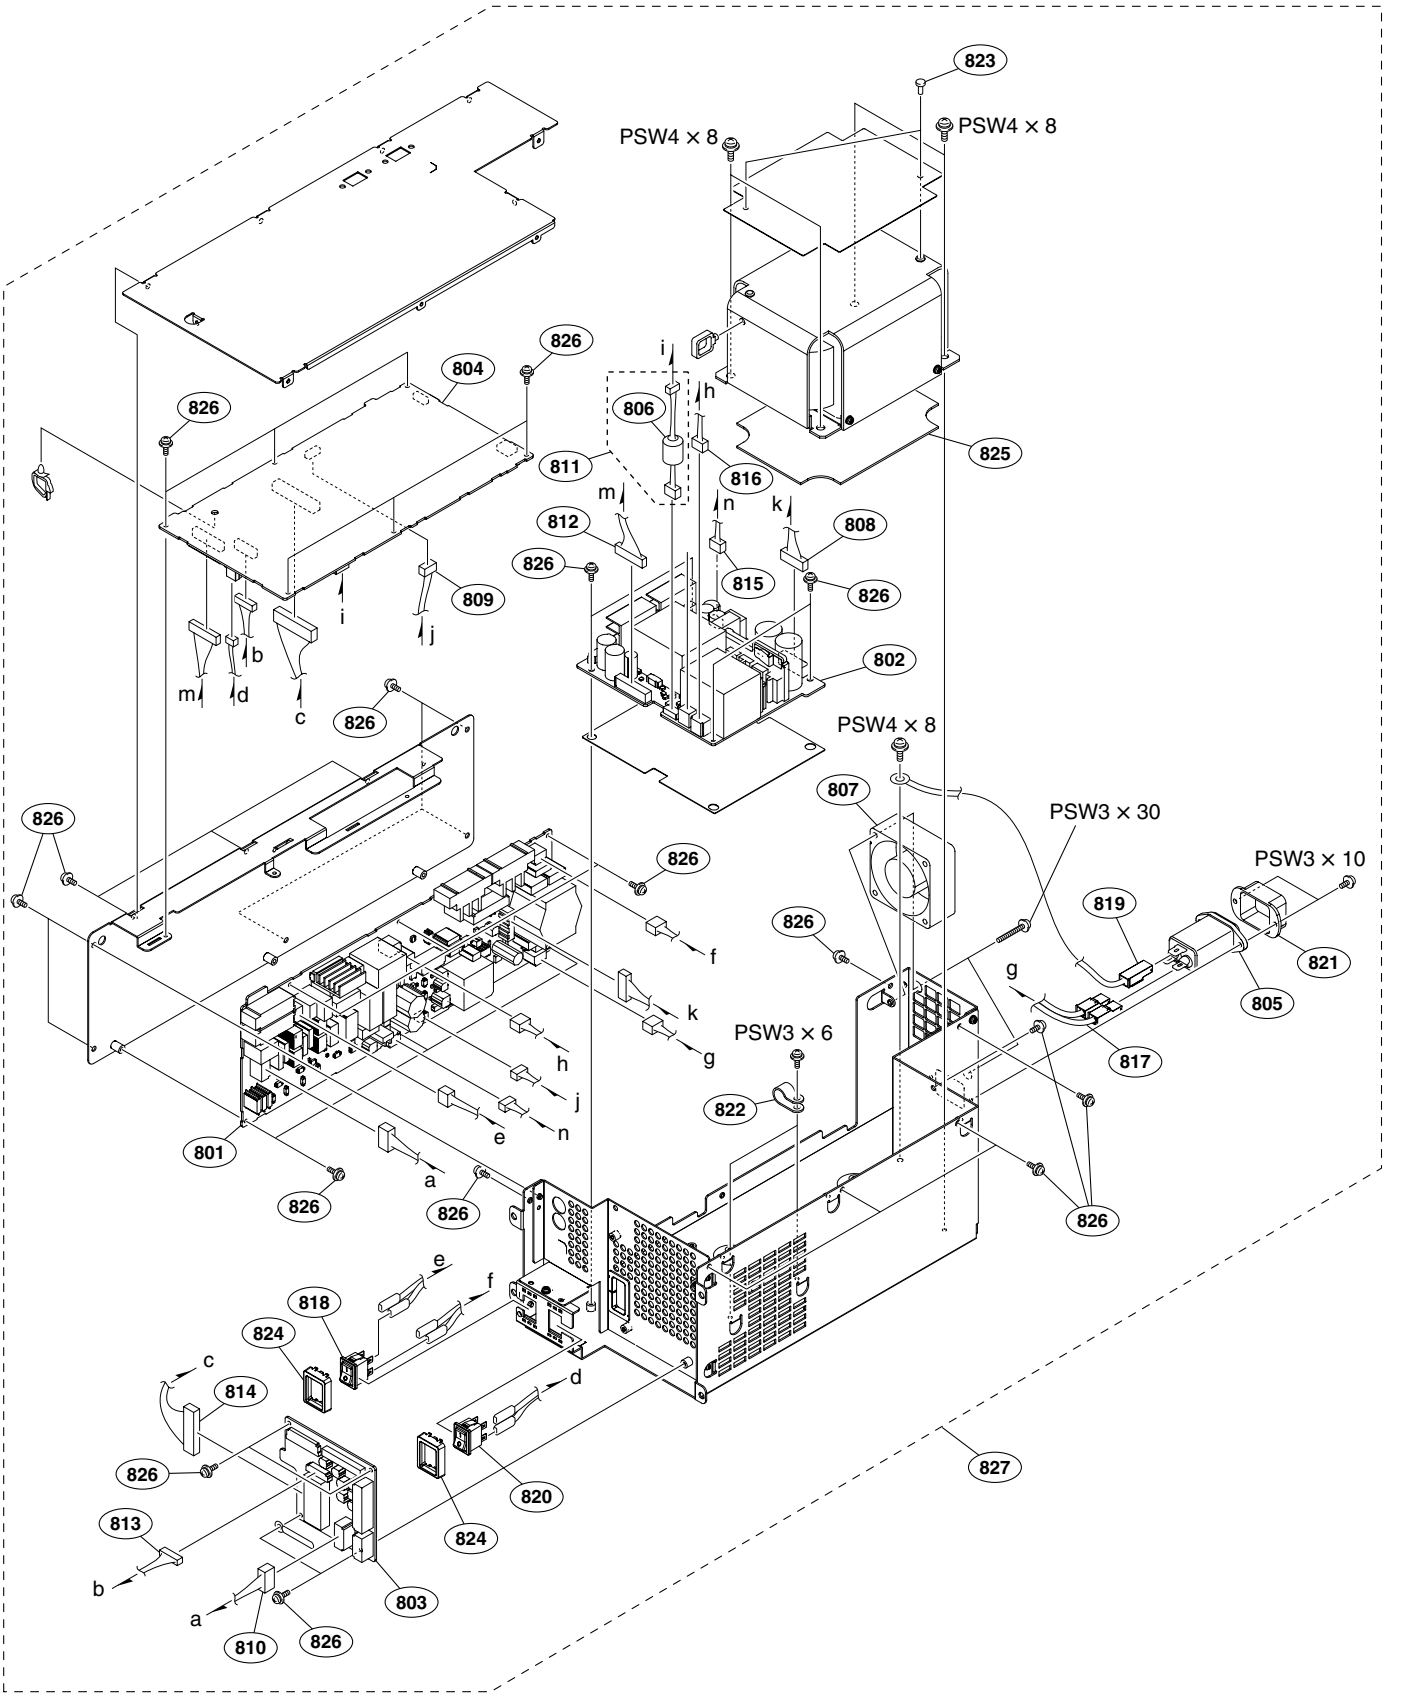

No.	Part No.	SP	Description
801	⚠ A-1769-658-A	s	MOUNTED CIRCUIT BOARD, PS-780
802	⚠ A-1769-659-A	s	MOUNTED CIRCUIT BOARD, PS-781
803	A-1769-662-A	s	MOUNTED CIRCUIT BOARD, CN-3275
804	⚠ A-1771-135-A	s	MOUNTED CIRCUIT BOARD, RE-276
805	⚠ 1-251-385-12	s	INLET (WITH NOISE FILTER)
806	1-500-249-11	s	BEAD, FERRITE (CASE)
807	⚠ 1-787-419-12	s	FAN, DC (60 SQUARE)
808	1-967-201-11	s	HARNESS, SUB (BOAD1)
809	1-967-202-11	s	HARNESS, SUB (BOAD2)
810	1-967-204-11	s	HARNESS, SUB (CAM POWER)
811	1-967-205-11	s	HARNESS, SUB (BOAD4)
812	1-967-206-11	s	HARNESS, SUB (BOAD5)
813	1-967-207-11	s	HARNESS, SUB (SIGNAL)
814	1-967-208-11	s	HARNESS, SUB (CCU POWER)
815	1-967-209-11	s	HARNESS, SUB (BOAD6)
816	1-967-210-11	s	HARNESS, SUB (BOAD7)
817	1-967-211-11	s	HARNESS, SUB (FROM AC)
818	1-967-213-11	s	HARNESS, SUB (FROM SW1)
819	1-967-214-11	s	HARNESS, SUB (EARTH)
820	1-967-215-11	s	HARNESS, SUB (FROM SW2)
821	2-990-241-02	s	HOLDER (A), PLUG
822	3-001-707-05	s	HOLDER, WIRE
823	3-531-576-01	s	RIVET
824	4-171-340-01	s	GUARD, SWITCH AC
825	4-191-694-01	s	SHEET RADIATION,COIL(A10-T1.5)
826	4-382-854-51	s	SCREW (M3X6), P, SW (+)
827	⚠ A-1804-005-A	s	POWER UNIT (RP)
	7-682-947-01	s	SCREW +PSW 3X6
	7-682-949-01	s	SCREW +PSW 3X10
	7-682-955-09	s	SCREW +PSW 3X30
	7-682-961-01	s	SCREW +PSW 4X8

Power Block Assy (D00)

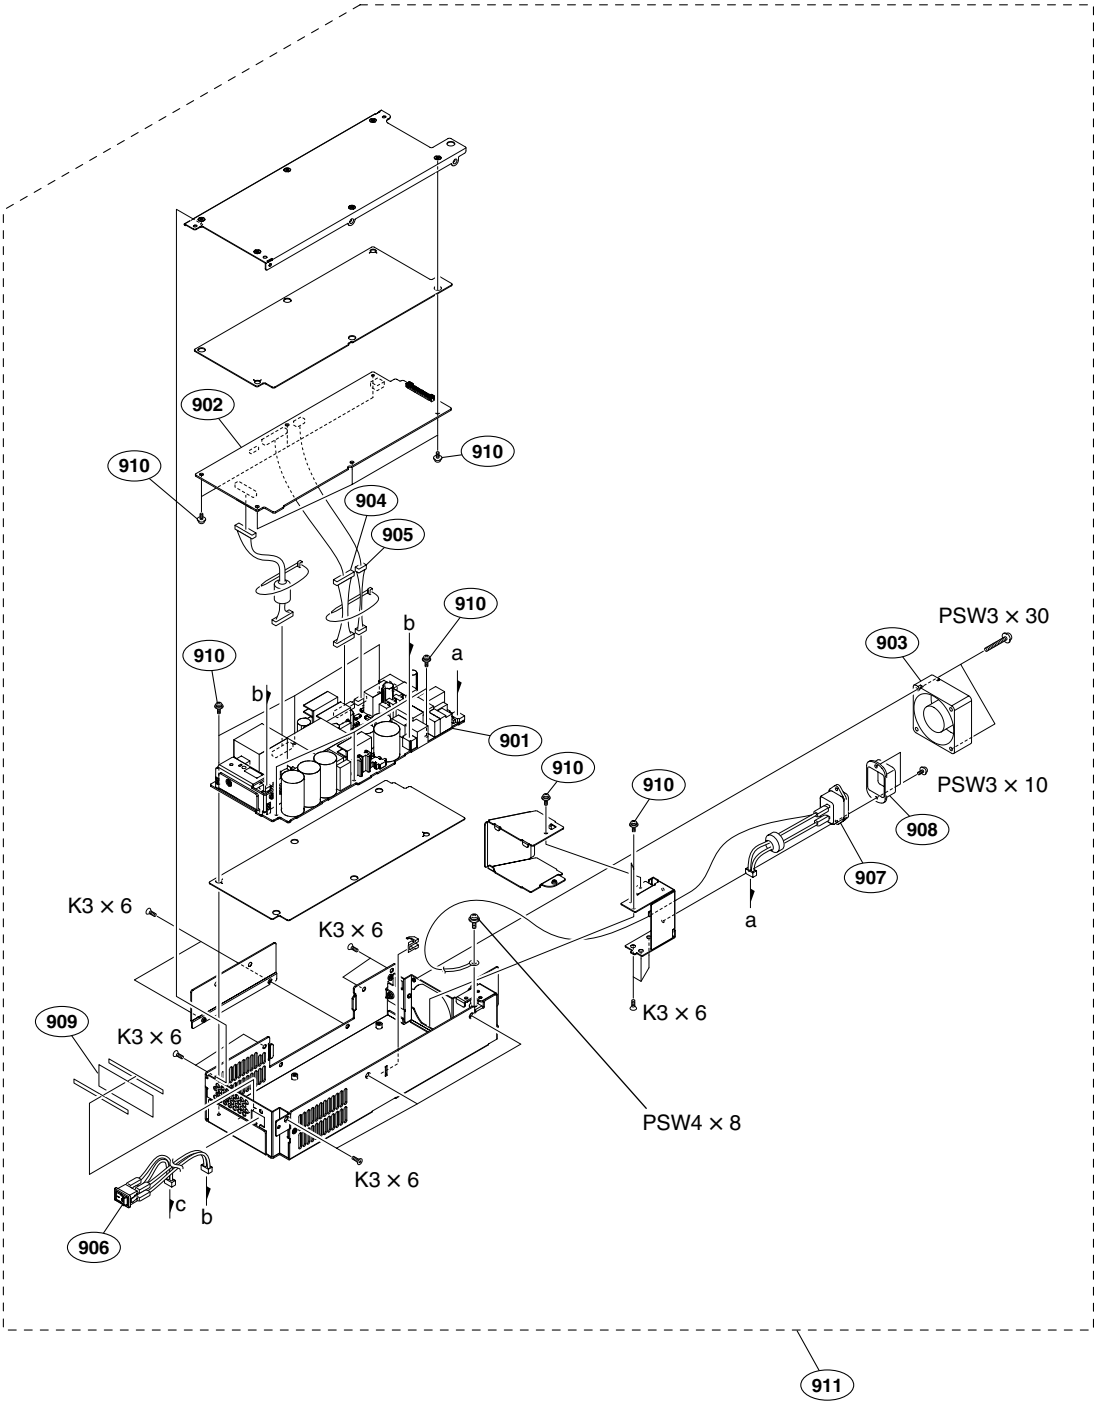

No.	Part No.	SP	Description
901	⚠ A-1769-657-A	s	MOUNTED CIRCUIT BOARD, PS-778
902	⚠ A-1771-369-A	s	MOUNTED CIRCUIT BOARD, RE-274
903	⚠ 1-787-419-12	s	FAN, DC (60 SQUARE)
904	1-967-196-11	s	HARNESS, SUB (BOAD1)
905	1-967-197-11	s	HARNESS, SUB (BOAD2)
906	1-967-199-11	s	HARNESS, SUB (TO SW)
907	1-967-200-11	s	HARNESS, SUB (FROM AC)
908	2-990-241-02	s	HOLDER (A), PLUG
909	4-191-661-01	s	SHEET RADIATION (EK)-3(D00-T1)
910	4-382-854-51	s	SCREW (M3X6), P, SW (+)
911	⚠ A-1768-442-A	s	POWER BLOCK ASSY (D00)
	7-682-247-04	s	SCREW +K 3X6
	7-682-949-01	s	SCREW +PSW 3X10
	7-682-955-09	s	SCREW +PSW 3X30
	7-682-961-01	s	SCREW +PSW 4X8

4-3. Electrical Parts List

ADO-10/10G BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1161-078-A	s	MOUNTED CIRCUIT BOARD, ADO-10G (GOLD)
1pc	A-1129-230-A	s	MOUNTED CIRCUIT BOARD, ADO-10 (SILVER)
CN2	1-778-451-31	s	CONNECTOR, FFC/FPC(ZIF) AN 50P (GOLD)
	1-778-451-21	o	CONNECTOR, FPC (50P) (SILVER)

AT-167 BOARD (suffix 13, 14, 31)

*1: Board No. suffix 13, 31
*2: Board No. suffix 14

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1129-299-A	s	MOUNTED CIRCUIT BOARD, AT-167
1pc	1-528-174-11	s	BATTERY, LITHIUM (CR2032 TYPE)
4pcs	7-682-947-01	s	SCREW +PSW 3X6
BT101	1-756-076-21	s	HOLDER, LITHIUM BATTERY
C1	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C5	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C6	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C7	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C8	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C9	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C10	1-127-573-91	s	CAP, CHIP CERAMIC 1MF B (2012)
C11	1-127-573-91	s	CAP, CHIP CERAMIC 1MF B (2012)
C12	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C13	1-126-391-21	s	CAP, CHIP ELECT 47MF (5X5.7)
C14	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C15	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C16	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C18	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C19	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C20	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C21	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C22	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C23	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C24	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C25	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C26	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C28	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C29	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C30	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C31	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C33	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C34	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C35	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C37	1-126-391-21	s	CAP, CHIP ELECT 47MF (5X5.7)
C38	1-126-391-21	s	CAP, CHIP ELECT 47MF (5X5.7)
C39	1-126-391-21	s	CAP, CHIP ELECT 47MF (5X5.7)
C41	1-126-391-21	s	CAP, CHIP ELECT 47MF (5X5.7)
C101	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C102	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C103	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C104	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C105	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C107	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C108	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C109	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C110	1-104-905-11	s	CAP, DOUBLE LAYERS 0.22F
C111	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C112	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C113	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C115	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C117	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C118	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(AT-167 BOARD suffix 13, 14, 31)

Ref. No. or Q'ty	Part No.	SP	Description
C119	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C120	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C121	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C122	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C123	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C124	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C125	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C126	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C127	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C128	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C129	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C130	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C131	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C132	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C133	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C134	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C135	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C136	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C137	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C138	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C139	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C140	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C141	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C142	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C143	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C144	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C145	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C146	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C147	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C148	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C149	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C150	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C151	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C152	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C153	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C154	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C155	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C156	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C157	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C158	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C159	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C160	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C161	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C162	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C163	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C164	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C165	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C166	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C167	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C168	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C169	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C170	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C171	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C172	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C173	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C174	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C175	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C176	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C177	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(AT-167 BOARD suffix 13, 14, 31)

Ref. No. or Q'ty	Part No.	SP	Description
C178	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C179	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C180	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C181	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C182	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C183	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C184	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C185	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C186	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C187	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C188	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C189	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C190	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C191	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C192	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C193	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C194	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C195	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C301	1-164-862-81	s	CAP, CHIP CERAMIC 33PF CH 1005
C302	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C303	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C304	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C305	1-164-862-81	s	CAP, CHIP CERAMIC 33PF CH 1005
C306	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C307	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C308	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C309	1-126-391-21	s	CAP, CHIP ELECT 47MF (5X5.7)
C310	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C311	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C312	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C313	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C314	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C315	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C316	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C317	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C318	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C319	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C320	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C321	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C323	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C324	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C325	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C326	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C327	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C328	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C329	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C330	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C331	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C332	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C333	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C334	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C335	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C336	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C337	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C338	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C339	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C340	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C341	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C342	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216

(AT-167 BOARD suffix 13, 14, 31)

Ref. No. or Q'ty	Part No.	SP	Description
C343	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C344	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C350	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C351	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C352	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C353	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C354	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C355	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C356	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C401	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C402	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C403	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C404	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C407	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C408	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C409	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C410	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C413	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C414	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C415	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C416	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C417	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C418	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C419	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C601	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C602	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C605	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C606	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C607	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C608	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C609	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C610	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C611	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C612	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C613	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C614	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C615	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C616	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C617	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C618	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C619	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C620	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C621	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C622	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C623	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C624	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C625	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C626	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C627	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C628	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C629	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C630	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C631	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C632	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C701	1-126-391-21	s	CAP, CHIP ELECT 47MF (5X5.7)
C702	1-126-391-21	s	CAP, CHIP ELECT 47MF (5X5.7)
C703	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C704	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C705	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216

(AT-167 BOARD suffix 13, 14, 31)

Ref. No. or Q'ty	Part No.	SP	Description
C706	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C708	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C709	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C710	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C711	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C712	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C713	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C716	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C717	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C718	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C719	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C720	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C721	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C722	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C723	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C724	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C725	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C726	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C727	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C728	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C729	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C730	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C731	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C732	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C733	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C734	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C735	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C736	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C738	1-126-391-21	s	CAP, CHIP ELECT 47MF (5X5.7)
C739	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C740	1-126-391-21	s	CAP, CHIP ELECT 47MF (5X5.7)
C741	1-164-882-81	s	CAP,CHIP CERAMIC 220PF CH 1005
C742	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C743	1-164-882-81	s	CAP,CHIP CERAMIC 220PF CH 1005
C744	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C745	1-125-891-91	s	CAP, CHIP CERAMIC0.47MF B 1608
C746	1-126-391-21	s	CAP, CHIP ELECT 47MF (5X5.7)
C747	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C748	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C749	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C750	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C751	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C752	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C753	1-126-391-21	s	CAP, CHIP ELECT 47MF (5X5.7)
C754	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C755	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C756	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C757	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C758	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C759	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C760	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C761	1-164-878-81	s	CAP,CHIP CERAMIC 150PF CH 1005
C762	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C763	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C764	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C765	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C766	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C767	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C768	1-127-956-21	s	CAP, CHIP FILM 0.1MF (3225)

(AT-167 BOARD suffix 13, 14, 31)

Ref. No. or Q'ty	Part No.	SP	Description
C769	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C770	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C771	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C772	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C773	1-127-956-21	s	CAP, CHIP FILM 0.1MF (3225)
C774	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C775	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C776	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C777	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C778	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C779	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C780	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C781	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C782	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C783	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C784	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C785	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C786	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C787	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C789	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C790	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C791	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C792	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C793	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C796	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C798	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C799	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C801	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C802	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C803	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C804	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C805	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C806	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C807	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C808	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C809	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C810	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C811	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C812	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C813	1-125-891-91	s	CAP, CHIP CERAMIC0.47MF B 1608
C814	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C815	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C816	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C817	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C818	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C819	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C820	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C821	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C822	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C823	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C827	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C829	1-164-878-81	s	CAP,CHIP CERAMIC 150PF CH 1005
C830	1-126-391-21	s	CAP, CHIP ELECT 47MF (5X5.7)
C831	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C833	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C834	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C835	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C836	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C837	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(AT-167 BOARD suffix 13, 14, 31)

Ref. No. or Q'ty	Part No.	SP	Description
C840	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C841	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C842	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C843	1-127-956-21	s	CAP, CHIP FILM 0.1MF (3225)
C844	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C845	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C846	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C847	1-127-956-21	s	CAP, CHIP FILM 0.1MF (3225)
C848	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C849	1-127-956-21	s	CAP, CHIP FILM 0.1MF (3225)
C850	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C851	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C852	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C853	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C854	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C855	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C856	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C857	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C858	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C859	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C860	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C861	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C862	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C863	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C864	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C865	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C866	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C867	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C868	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C870	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C871	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C873	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C874	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C875	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C876	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
CN103	1-794-917-11	s	CONNECTOR, MEMORY STICK
CN104	1-793-093-91	o	CONNECTOR, BOARD TO BOARD 60P
CN301	1-573-290-21	s	PIN, CONNECTOR (1.5MM) (SMD)4P
CN601	1-764-093-21	o	PIN, CONNECTOR (PC BOARD) 8P
D1	8-719-017-03	s	DIODE 02DZ4.7-TPH3
D2	8-719-017-03	s	DIODE 02DZ4.7-TPH3
D4	8-719-074-31	s	DIODE CL-196YG-CD-T
D101	8-719-820-42	s	DIODE 1SS302-TE85L
D102	8-719-070-20	s	DIODE RB706F-40
D103	8-719-820-42	s	DIODE 1SS302-TE85L
D104	8-719-820-42	s	DIODE 1SS302-TE85L
D105	8-719-820-42	s	DIODE 1SS302-TE85L
D106	8-719-820-42	s	DIODE 1SS302-TE85L
D107	8-719-820-42	s	DIODE 1SS302-TE85L
D401	8-719-024-81	s	DIODE 1SS300-TE85L
D402	8-719-024-81	s	DIODE 1SS300-TE85L
D403	8-719-024-81	s	DIODE 1SS300-TE85L
D404	8-719-024-81	s	DIODE 1SS300-TE85L
D405	8-719-024-81	s	DIODE 1SS300-TE85L
D406	8-719-024-81	s	DIODE 1SS300-TE85L
D407	8-719-024-81	s	DIODE 1SS300-TE85L
D408	8-719-024-81	s	DIODE 1SS300-TE85L
D409	8-719-074-31	s	DIODE CL-196YG-CD-T
D410	8-719-077-09	s	DIODE CL-196HR-CD-T

(AT-167 BOARD suffix 13, 14, 31)

Ref. No. or Q'ty	Part No.	SP	Description
D411	8-719-027-83	s	DIODE CL-155UR/G-DT
D412	8-719-027-83	s	DIODE CL-155UR/G-DT
D416	8-719-024-81	s	DIODE 1SS300-TE85L
D417	8-719-024-81	s	DIODE 1SS300-TE85L
D418	8-719-024-81	s	DIODE 1SS300-TE85L
D419	8-719-024-81	s	DIODE 1SS300-TE85L
D420	8-719-024-81	s	DIODE 1SS300-TE85L
D421	8-719-024-81	s	DIODE 1SS300-TE85L
D422	8-719-024-81	s	DIODE 1SS300-TE85L
D423	8-719-024-81	s	DIODE 1SS300-TE85L
D425	8-719-024-81	s	DIODE 1SS300-TE85L
D427	8-719-024-81	s	DIODE 1SS300-TE85L
D428	8-719-024-81	s	DIODE 1SS300-TE85L
D429	8-719-024-81	s	DIODE 1SS300-TE85L
D701	8-719-820-42	s	DIODE 1SS302-TE85L
D702	8-719-024-81	s	DIODE 1SS300-TE85L
D703	8-719-820-42	s	DIODE 1SS302-TE85L
D704	8-719-820-42	s	DIODE 1SS302-TE85L
D705	8-719-820-42	s	DIODE 1SS302-TE85L
D706	8-719-820-42	s	DIODE 1SS302-TE85L
D707	8-719-820-42	s	DIODE 1SS302-TE85L
D708	8-719-820-42	s	DIODE 1SS302-TE85L
D709	8-719-070-20	s	DIODE RB706F-40
E1	1-535-877-22	s	CHIP, CHECKER
E2	1-535-877-22	s	CHIP, CHECKER
E4	1-535-877-22	s	CHIP, CHECKER
FB701	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB702	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB703	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB704	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
IC1	6-704-976-01	s	IC ADR381ARTZ-REEL7
IC2	6-700-655-01	s	IC LT1963ES8#TR
IC3	8-759-327-01	s	IC NJM062V(TE2)
IC4	8-759-327-01	s	IC NJM062V(TE2)
IC6	8-759-338-95	s	IC NJM2903V(TE2)
IC101	6-710-018-01	s	IC CAT24C02WI-GT3
IC102	8-759-523-01	s	IC TC74HC4052AFT(EL)
IC103	8-759-363-26	s	IC RN5VD28AA-TL-FA
IC104	8-759-669-71	s	IC PCF8591T/2
IC105	8-759-648-04	s	IC RTC-4574JE
IC106	8-759-669-44	s	IC SN74LVC74APWR-12
IC107	6-703-461-11	s	IC CY2309ZXC-1HT
IC108	6-706-488-01	s	IC TC7SH14FU(T5RSOYJF)
IC110	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC111	8-759-669-42	s	IC SN74LVC138APWR-12
IC112	8-759-669-42	s	IC SN74LVC138APWR-12
IC113	8-759-669-42	s	IC SN74LVC138APWR-12
IC114	8-759-669-68	s	IC SN74CBT3253PWR-12
IC116	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC118	8-759-557-85	s	IC NC7SZ32P5X
IC119	6-705-721-01	s	IC MT48LC8M16A2P-75-Y15WTR
IC120	6-705-721-01	s	IC MT48LC8M16A2P-75-Y15WTR
IC121	8-759-669-42	s	IC SN74LVC138APWR-12
IC122 *1	6-707-947-01	s	IC MB85R256PFTN-G-BNDE1
*2	6-707-947-01	s	IC MB85R256PFTN-G-BNDE1
IC123 *1	6-707-947-01	s	IC MB85R256PFTN-G-BNDE1
*2	6-707-947-01	s	IC MB85R256PFTN-G-BNDE1
IC124	8-759-543-64	s	IC NC7SZ08P5X

(AT-167 BOARD suffix 13, 14, 31)

Ref. No. or Q'ty	Part No.	SP	Description
IC125 *1	8-759-679-55	s	IC SN74LVC08APWR
*2	8-759-679-55	s	IC SN74LVC08APWR
IC126	8-759-557-84	s	IC NC7SZ04P5X
IC127	8-759-557-84	s	IC NC7SZ04P5X
IC128	8-759-543-64	s	IC NC7SZ08P5X
IC129	8-759-584-32	s	IC MB86189PFV-G-BND-ER-E1
IC130	6-706-484-01	s	IC TC7SH04FU(T5RSOYJF)
IC131	8-759-327-01	s	IC NJM062V(TE2)
IC132	6-706-484-01	s	IC TC7SH04FU(T5RSOYJF)
IC133	6-706-488-01	s	IC TC7SH14FU(T5RSOYJF)
IC134	6-706-488-01	s	IC TC7SH14FU(T5RSOYJF)
IC135	6-706-483-01	s	IC TC7SH02FU(T5RSOYJF)
IC136	6-706-488-01	s	IC TC7SH14FU(T5RSOYJF)
IC137	8-759-472-43	s	IC 74VHC245MTCX
IC138	8-759-472-43	s	IC 74VHC245MTCX
IC139	8-759-472-43	s	IC 74VHC245MTCX
IC140	8-759-472-43	s	IC 74VHC245MTCX
IC141	8-759-679-55	s	IC SN74LVC08APWR
IC142	8-759-679-55	s	IC SN74LVC08APWR
IC143	8-759-679-55	s	IC SN74LVC08APWR
IC144	8-759-327-01	s	IC NJM062V(TE2)
IC145	8-759-669-66	s	IC TLC272CPWR-12
IC146	8-759-543-64	s	IC NC7SZ08P5X
IC147	8-759-543-64	s	IC NC7SZ08P5X
IC148	8-759-543-64	s	IC NC7SZ08P5X
IC149	8-759-679-55	s	IC SN74LVC08APWR
IC150	8-759-543-64	s	IC NC7SZ08P5X
IC151	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC301	8-759-594-17	o	IC CXD9093R
IC302	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC303	6-706-484-01	s	IC TC7SH04FU(T5RSOYJF)
IC304	8-759-594-17	o	IC CXD9093R
IC305	6-702-691-01	s	IC BCM5221A4KPT
IC306	8-759-531-92	s	IC TC7WH04FU(TE12R)
IC307	8-759-471-91	s	IC 74VHC04MTCX
IC308	8-759-092-83	s	IC SN75158PSR
IC309	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC401	8-752-392-03	s	IC CXD1095BR
IC402	6-706-357-01	s	IC LTC1664IGN#TR
IC403	8-759-662-38	s	IC 74VHCT08AMTCX
IC406	8-759-531-92	s	IC TC7WH04FU(TE12R)
IC407	8-752-392-03	s	IC CXD1095BR
IC408	8-759-472-43	s	IC 74VHC245MTCX
IC409	8-759-531-92	s	IC TC7WH04FU(TE12R)
IC410	8-759-471-96	s	IC 74VHC08MTCX
IC411	8-759-471-96	s	IC 74VHC08MTCX
IC602	8-759-363-26	s	IC RN5VD28AA-TL-FA
IC607	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC701	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC702	8-759-327-14	s	IC TL712CPSR
IC703	8-759-327-14	s	IC TL712CPSR
IC704	8-759-327-14	s	IC TL712CPSR
IC705	8-759-344-12	s	IC GS4981CTAE3
IC706	8-759-669-41	s	IC SN74LVC125APWR-12
IC707	8-759-662-38	s	IC 74VHCT08AMTCX
IC708	8-759-485-24	s	IC MC74HC4046ADTR2
IC709	8-759-184-65	s	IC TC4W66FU(TE12R)
IC710	8-759-564-49	s	IC TC7W53FU(TE12R)
IC711	8-759-564-49	s	IC TC7W53FU(TE12R)

(AT-167 BOARD suffix 13, 14, 31)

Ref. No. or Q'ty	Part No.	SP	Description
IC712	8-759-675-47	s	IC SN74LVC04APWR
IC713	8-759-675-47	s	IC SN74LVC04APWR
IC715	8-759-675-47	s	IC SN74LVC04APWR
IC717	6-700-804-01	s	IC SN74LVC574APWR
IC718	8-759-564-49	s	IC TC7W53FU(TE12R)
IC719	8-759-344-12	s	IC GS4981CTAE3
IC720	8-759-327-14	s	IC TL712CPSR
IC722	8-759-485-24	s	IC MC74HC4046ADTR2
IC723	8-759-564-49	s	IC TC7W53FU(TE12R)
IC724	8-759-564-49	s	IC TC7W53FU(TE12R)
IC726	6-700-804-01	s	IC SN74LVC574APWR
IC727	8-759-471-91	s	IC 74VHC04MTCX
IC728	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC729	8-759-669-41	s	IC SN74LVC125APWR-12
IC730	8-759-675-47	s	IC SN74LVC04APWR
IC732	8-759-669-66	s	IC TLC272CPWR-12
IC733	8-759-669-66	s	IC TLC272CPWR-12
IC734	8-759-669-66	s	IC TLC272CPWR-12
IC735	8-759-669-66	s	IC TLC272CPWR-12
IC736	8-759-669-66	s	IC TLC272CPWR-12
IC737	8-759-669-66	s	IC TLC272CPWR-12
IC738	8-759-669-66	s	IC TLC272CPWR-12
IC739	6-706-484-01	s	IC TC7SH04FU(T5RSOYJF)
IC740	8-759-669-41	s	IC SN74LVC125APWR-12
IC741	8-759-663-35	s	IC 74VHC4053MTCX
IC742	8-759-663-35	s	IC 74VHC4053MTCX
IC743	8-759-523-04	s	IC TC74HC4538AFT(EL)
IC744	6-706-476-01	s	IC TC7SET04FU(T5RSOJF)
IC745	6-706-476-01	s	IC TC7SET04FU(T5RSOJF)
IC746	6-706-489-01	s	IC TC7SH32FU(T5RSOYJF)
IC747	6-706-478-01	s	IC TC7SET08FU(T5RSOJF)
IC748	6-706-478-01	s	IC TC7SET08FU(T5RSOJF)
IC749	8-759-523-04	s	IC TC74HC4538AFT(EL)
IC750	8-759-669-41	s	IC SN74LVC125APWR-12
IC751	6-706-484-01	s	IC TC7SH04FU(T5RSOYJF)
IC752	6-706-489-01	s	IC TC7SH32FU(T5RSOYJF)
IC753	6-706-484-01	s	IC TC7SH04FU(T5RSOYJF)
IC755	6-706-484-01	s	IC TC7SH04FU(T5RSOYJF)
IC756	8-759-531-92	s	IC TC7WH04FU(TE12R)
IC757	6-706-478-01	s	IC TC7SET08FU(T5RSOJF)
IC758	6-706-478-01	s	IC TC7SET08FU(T5RSOJF)
IC759	8-759-592-42	s	IC TC7SZ00FU(TE85R)
IC760	8-759-592-42	s	IC TC7SZ00FU(TE85R)
IC761	8-759-592-42	s	IC TC7SZ00FU(TE85R)
IC762	8-759-592-42	s	IC TC7SZ00FU(TE85R)
L1	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L101	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L102	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L103	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L104	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L105	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L106	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L107	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L108	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L109	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L110	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L111	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L113	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L114	1-414-398-41	s	INDUCTOR (SMD) 10.0UH

(AT-167 BOARD suffix 13, 14, 31)

Ref. No. or Q'ty	Part No.	SP	Description
L301	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L302	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L303	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L304	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L305	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L401	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L601	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L602	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L701	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L702	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L703	1-414-396-41	s	INDUCTOR (SMD) 4.7UH
L704	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L705	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L706	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L707	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L708	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L709	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L710	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L711	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L712	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L713	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L714	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L715	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L716	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L717	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L718	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L719	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L720	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L724	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L725	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L726	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L727	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L728	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L729	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L730	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L733	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L734	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L735	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L736	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L737	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L738	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L739	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L740	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L741	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L742	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L743	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
PH1	8-749-011-37	s	PHOTO COUPLER TLP181(BL-TPR)
PH301	8-749-014-35	s	IC HCPL-0630-500
PH302	8-749-014-35	s	IC HCPL-0630-500
Q1	8-729-035-99	s	TRANSISTOR 2SA1615-Z-E2
Q2	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q3	8-729-209-73	s	TRANSISTOR 2SA1213Y-TE12L
Q4	8-729-209-77	s	TRANSISTOR 2SC2873Y-TE12L
Q5	6-551-380-01	s	TRANSISTOR SI4425BDY-T1
Q6	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q101	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q102	8-729-209-73	s	TRANSISTOR 2SA1213Y-TE12L
Q301	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR

(AT-167 BOARD suffix 13, 14, 31)

Ref. No. or Q'ty	Part No.	SP	Description
Q401	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q402	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q403	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q404	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q405	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q406	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q407	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q408	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q409	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q410	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q411	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q412	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q413	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q414	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q415	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q416	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q417	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q418	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q419	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q701	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q702	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q703	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q704	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q705	8-729-142-11	s	TRANSISTOR 2SA1226-T1E3E4
Q706	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q707	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q708	8-729-142-11	s	TRANSISTOR 2SA1226-T1E3E4
Q709	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q710	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
R1	1-208-863-81	s	RES, CHIP 100 (1005)
R2	1-208-875-81	s	RES, CHIP 330 (1005)
R3	1-208-863-81	s	RES, CHIP 100 (1005)
R4	1-208-919-81	s	RES, CHIP 22K (1005)
R5	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R6	1-208-871-81	s	RES, CHIP 220 (1005)
R7	1-208-871-81	s	RES, CHIP 220 (1005)
R8	1-208-871-81	s	RES, CHIP 220 (1005)
R9	1-208-911-81	s	RES, CHIP 10K (1005)
R10	1-208-911-81	s	RES, CHIP 10K (1005)
R11	1-208-923-81	s	RES, CHIP 33K (1005)
R12	1-208-923-81	s	RES, CHIP 33K (1005)
R13	1-208-923-81	s	RES, CHIP 33K (1005)
R14	1-208-923-81	s	RES, CHIP 33K (1005)
R15	1-208-927-81	s	RES, CHIP 47K (1005)
R16	1-208-911-81	s	RES, CHIP 10K (1005)
R17	1-208-911-81	s	RES, CHIP 10K (1005)
R18	1-208-919-81	s	RES, CHIP 22K (1005)
R19	1-208-907-81	s	RES, CHIP 6.8K (1005)
R20	1-208-923-81	s	RES, CHIP 33K (1005)
R22	1-208-931-81	s	RES, CHIP 68K (1005)
R23	1-208-931-81	s	RES, CHIP 68K (1005)
R33	1-208-927-81	s	RES, CHIP 47K (1005)
R34	1-208-915-81	s	RES, CHIP 15K (1005)
R35	1-208-915-81	s	RES, CHIP 15K (1005)
R36	1-208-919-81	s	RES, CHIP 22K (1005)
R41	1-208-887-81	s	RES, CHIP 1.0K (1005)
R43	1-208-927-81	s	RES, CHIP 47K (1005)
R44	1-208-935-81	s	RES, CHIP 100K (1005)
R48	1-208-895-81	s	RES, CHIP 2.2K (1005)

(AT-167 BOARD suffix 13, 14, 31)

Ref. No. or Q'ty	Part No.	SP	Description
R49	1-208-911-81	s	RES, CHIP 10K (1005)
R50	1-208-919-81	s	RES, CHIP 22K (1005)
R51	1-208-911-81	s	RES, CHIP 10K (1005)
R101	1-220-870-81	s	RES, CHIP 10 (1005)
R102	1-208-911-81	s	RES, CHIP 10K (1005)
R103	1-208-911-81	s	RES, CHIP 10K (1005)
R104	1-208-887-81	s	RES, CHIP 1.0K (1005)
R105	1-208-915-81	s	RES, CHIP 15K (1005)
R106	1-208-863-81	s	RES, CHIP 100 (1005)
R107	1-208-863-81	s	RES, CHIP 100 (1005)
R108	1-208-887-81	s	RES, CHIP 1.0K (1005)
R109	1-208-863-81	s	RES, CHIP 100 (1005)
R110	1-208-935-81	s	RES, CHIP 100K (1005)
R111	1-208-911-81	s	RES, CHIP 10K (1005)
R112	1-208-911-81	s	RES, CHIP 10K (1005)
R113	1-208-855-81	s	RES, CHIP 47 (1005)
R115	1-220-870-81	s	RES, CHIP 10 (1005)
R116	1-220-870-81	s	RES, CHIP 10 (1005)
R117	1-220-870-81	s	RES, CHIP 10 (1005)
R118	1-220-870-81	s	RES, CHIP 10 (1005)
R119	1-208-855-81	s	RES, CHIP 47 (1005)
R120	1-208-855-81	s	RES, CHIP 47 (1005)
R121	1-208-911-81	s	RES, CHIP 10K (1005)
R122	1-208-887-81	s	RES, CHIP 1.0K (1005)
R123	1-208-895-81	s	RES, CHIP 2.2K (1005)
R124	1-208-895-81	s	RES, CHIP 2.2K (1005)
R125	1-208-895-81	s	RES, CHIP 2.2K (1005)
R128	1-208-863-81	s	RES, CHIP 100 (1005)
R129	1-208-863-81	s	RES, CHIP 100 (1005)
R130	1-208-887-81	s	RES, CHIP 1.0K (1005)
R131	1-208-935-81	s	RES, CHIP 100K (1005)
R132	1-208-935-81	s	RES, CHIP 100K (1005)
R133	1-208-935-81	s	RES, CHIP 100K (1005)
R134	1-208-935-81	s	RES, CHIP 100K (1005)
R135	1-208-911-81	s	RES, CHIP 10K (1005)
R136	1-208-911-81	s	RES, CHIP 10K (1005)
R137	1-208-863-81	s	RES, CHIP 100 (1005)
R139	1-208-887-81	s	RES, CHIP 1.0K (1005)
R140	1-208-911-81	s	RES, CHIP 10K (1005)
R142	1-208-935-81	s	RES, CHIP 100K (1005)
R144	1-208-887-81	s	RES, CHIP 1.0K (1005)
R147	1-208-863-81	s	RES, CHIP 100 (1005)
R148	1-208-911-81	s	RES, CHIP 10K (1005)
R150	1-208-911-81	s	RES, CHIP 10K (1005)
*1 R151	1-208-855-81	s	RES, CHIP 47 (1005)
R152	1-208-855-81	s	RES, CHIP 47 (1005)
R153	1-208-855-81	s	RES, CHIP 47 (1005)
R154	1-208-855-81	s	RES, CHIP 47 (1005)
R155	1-208-855-81	s	RES, CHIP 47 (1005)
R156	1-208-855-81	s	RES, CHIP 47 (1005)
R157	1-208-855-81	s	RES, CHIP 47 (1005)
R158	1-208-911-81	s	RES, CHIP 10K (1005)
R159	1-208-911-81	s	RES, CHIP 10K (1005)
R160	1-208-911-81	s	RES, CHIP 10K (1005)
R161	1-208-863-81	s	RES, CHIP 100 (1005)
R162	1-208-863-81	s	RES, CHIP 100 (1005)
R163	1-208-863-81	s	RES, CHIP 100 (1005)
R164	1-208-863-81	s	RES, CHIP 100 (1005)
R165	1-208-863-81	s	RES, CHIP 100 (1005)

(AT-167 BOARD suffix 13, 14, 31)

Ref. No. or Q'ty	Part No.	SP	Description
R166	1-208-863-81	s	RES, CHIP 100 (1005)
R167	1-208-935-81	s	RES, CHIP 100K (1005)
R168	1-208-911-81	s	RES, CHIP 10K (1005)
R169	1-208-911-81	s	RES, CHIP 10K (1005)
R170	1-208-911-81	s	RES, CHIP 10K (1005)
R171	1-208-911-81	s	RES, CHIP 10K (1005)
R172	1-208-911-81	s	RES, CHIP 10K (1005)
R173	1-220-878-81	s	RES, CHIP 22 (1005)
R174	1-208-911-81	s	RES, CHIP 10K (1005)
R175	1-208-911-81	s	RES, CHIP 10K (1005)
R176	1-208-911-81	s	RES, CHIP 10K (1005)
R177	1-208-911-81	s	RES, CHIP 10K (1005)
R178	1-208-911-81	s	RES, CHIP 10K (1005)
R179	1-220-878-81	s	RES, CHIP 22 (1005)
R180	1-220-878-81	s	RES, CHIP 22 (1005)
R181	1-208-855-81	s	RES, CHIP 47 (1005)
R182	1-208-855-81	s	RES, CHIP 47 (1005)
R183	1-208-855-81	s	RES, CHIP 47 (1005)
R184	1-208-855-81	s	RES, CHIP 47 (1005)
R185	1-208-855-81	s	RES, CHIP 47 (1005)
R186	1-208-863-81	s	RES, CHIP 100 (1005)
R187	1-208-911-81	s	RES, CHIP 10K (1005)
R188	1-208-935-81	s	RES, CHIP 100K (1005)
R189	1-208-863-81	s	RES, CHIP 100 (1005)
R190	1-208-935-81	s	RES, CHIP 100K (1005)
R191	1-208-935-81	s	RES, CHIP 100K (1005)
R192	1-208-855-81	s	RES, CHIP 47 (1005)
R193	1-208-855-81	s	RES, CHIP 47 (1005)
R194	1-220-870-81	s	RES, CHIP 10 (1005)
R195	1-208-935-81	s	RES, CHIP 100K (1005)
R196	1-208-911-81	s	RES, CHIP 10K (1005)
R197	1-208-911-81	s	RES, CHIP 10K (1005)
R198	1-208-911-81	s	RES, CHIP 10K (1005)
R199	1-208-911-81	s	RES, CHIP 10K (1005)
R200	1-208-911-81	s	RES, CHIP 10K (1005)
R201	1-208-935-81	s	RES, CHIP 100K (1005)
R202	1-208-911-81	s	RES, CHIP 10K (1005)
R203	1-208-911-81	s	RES, CHIP 10K (1005)
R204	1-208-911-81	s	RES, CHIP 10K (1005)
R205	1-208-935-81	s	RES, CHIP 100K (1005)
R206	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R207	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R209	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R210	1-208-911-81	s	RES, CHIP 10K (1005)
R211	1-208-911-81	s	RES, CHIP 10K (1005)
R212	1-220-870-81	s	RES, CHIP 10 (1005)
R213	1-208-935-81	s	RES, CHIP 100K (1005)
R214	1-208-911-81	s	RES, CHIP 10K (1005)
R215	1-208-887-81	s	RES, CHIP 1.0K (1005)
R216	1-220-878-81	s	RES, CHIP 22 (1005)
R217	1-220-878-81	s	RES, CHIP 22 (1005)
R218	1-220-878-81	s	RES, CHIP 22 (1005)
R219	1-220-878-81	s	RES, CHIP 22 (1005)
R220	1-220-878-81	s	RES, CHIP 22 (1005)
R221	1-220-878-81	s	RES, CHIP 22 (1005)
R222	1-208-935-81	s	RES, CHIP 100K (1005)
R223	1-208-935-81	s	RES, CHIP 100K (1005)
R224	1-208-935-81	s	RES, CHIP 100K (1005)
R225	1-208-935-81	s	RES, CHIP 100K (1005)

(AT-167 BOARD suffix 13, 14, 31)

Ref. No. or Q'ty	Part No.	SP	Description
R227	1-208-927-81	s	RES, CHIP 47K (1005)
R228	1-208-927-81	s	RES, CHIP 47K (1005)
R229	1-208-919-81	s	RES, CHIP 22K (1005)
R230	1-208-911-81	s	RES, CHIP 10K (1005)
R231	1-208-899-81	s	RES, CHIP 3.3K (1005)
R232	1-208-863-81	s	RES, CHIP 100 (1005)
R233	1-208-855-81	s	RES, CHIP 47 (1005)
R234	1-208-863-81	s	RES, CHIP 100 (1005)
R235	1-208-935-81	s	RES, CHIP 100K (1005)
R236	1-208-935-81	s	RES, CHIP 100K (1005)
R237	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R240	1-220-870-81	s	RES, CHIP 10 (1005)
R241	1-220-870-81	s	RES, CHIP 10 (1005)
R242	1-208-855-81	s	RES, CHIP 47 (1005)
R243	1-208-855-81	s	RES, CHIP 47 (1005)
R245	1-220-870-81	s	RES, CHIP 10 (1005)
R246	1-208-863-81	s	RES, CHIP 100 (1005)
R247	1-208-887-81	s	RES, CHIP 1.0K (1005)
R248 *2	1-220-870-81	s	RES, CHIP 10 (1005)
R301	1-208-863-81	s	RES, CHIP 100 (1005)
R302	1-208-863-81	s	RES, CHIP 100 (1005)
R303	1-208-871-81	s	RES, CHIP 220 (1005)
R304	1-208-907-81	s	RES, CHIP 6.8K (1005)
R305	1-208-911-81	s	RES, CHIP 10K (1005)
R306	1-208-907-81	s	RES, CHIP 6.8K (1005)
R307	1-208-863-81	s	RES, CHIP 100 (1005)
R308	1-220-870-81	s	RES, CHIP 10 (1005)
R309	1-220-870-81	s	RES, CHIP 10 (1005)
R310	1-220-882-81	s	RES, CHIP 33 (1005)
R311	1-208-911-81	s	RES, CHIP 10K (1005)
R312	1-208-907-81	s	RES, CHIP 6.8K (1005)
R313	1-208-907-81	s	RES, CHIP 6.8K (1005)
R314	1-220-870-81	s	RES, CHIP 10 (1005)
R315	1-208-895-81	s	RES, CHIP 2.2K (1005)
R316	1-208-911-81	s	RES, CHIP 10K (1005)
R317	1-208-911-81	s	RES, CHIP 10K (1005)
R318	1-208-911-81	s	RES, CHIP 10K (1005)
R319	1-208-911-81	s	RES, CHIP 10K (1005)
R320	1-208-911-81	s	RES, CHIP 10K (1005)
R321	1-208-887-81	s	RES, CHIP 1.0K (1005)
R322	1-208-887-81	s	RES, CHIP 1.0K (1005)
R323	1-208-887-81	s	RES, CHIP 1.0K (1005)
R324	1-208-887-81	s	RES, CHIP 1.0K (1005)
R325	1-208-911-81	s	RES, CHIP 10K (1005)
R326	1-208-911-81	s	RES, CHIP 10K (1005)
R327	1-208-911-81	s	RES, CHIP 10K (1005)
R328	1-208-871-81	s	RES, CHIP 220 (1005)
R329	1-208-911-81	s	RES, CHIP 10K (1005)
R330	1-208-911-81	s	RES, CHIP 10K (1005)
R331	1-208-927-81	s	RES, CHIP 47K (1005)
R332	1-208-895-81	s	RES, CHIP 2.2K (1005)
R333	1-208-887-81	s	RES, CHIP 1.0K (1005)
R334	1-208-927-81	s	RES, CHIP 47K (1005)
R335	1-208-871-81	s	RES, CHIP 220 (1005)
R337	1-208-911-81	s	RES, CHIP 10K (1005)
R338	1-208-911-81	s	RES, CHIP 10K (1005)
R339	1-208-911-81	s	RES, CHIP 10K (1005)
R340	1-208-911-81	s	RES, CHIP 10K (1005)
R341	1-208-887-81	s	RES, CHIP 1.0K (1005)

(AT-167 BOARD suffix 13, 14, 31)

Ref. No. or Q'ty	Part No.	SP	Description
R342	1-208-887-81	s	RES, CHIP 1.0K (1005)
R343	1-208-887-81	s	RES, CHIP 1.0K (1005)
R344	1-208-911-81	s	RES, CHIP 10K (1005)
R345	1-208-911-81	s	RES, CHIP 10K (1005)
R346	1-208-911-81	s	RES, CHIP 10K (1005)
R347	1-220-878-81	s	RES, CHIP 22 (1005)
R348	1-208-903-81	s	RES, CHIP 4.7K (1005)
R349	1-208-887-81	s	RES, CHIP 1.0K (1005)
R350	1-208-871-81	s	RES, CHIP 220 (1005)
R351	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R352	1-220-882-81	s	RES, CHIP 33 (1005)
R353	1-220-882-81	s	RES, CHIP 33 (1005)
R354	1-208-863-81	s	RES, CHIP 100 (1005)
R355	1-208-863-81	s	RES, CHIP 100 (1005)
R356	1-208-863-81	s	RES, CHIP 100 (1005)
R357	1-208-863-81	s	RES, CHIP 100 (1005)
R358	1-208-863-81	s	RES, CHIP 100 (1005)
R359	1-208-863-81	s	RES, CHIP 100 (1005)
R360	1-208-863-81	s	RES, CHIP 100 (1005)
R361	1-208-863-81	s	RES, CHIP 100 (1005)
R362	1-208-891-81	s	RES, CHIP 1.5K (1005)
R363	1-208-903-81	s	RES, CHIP 4.7K (1005)
R364	1-220-870-81	s	RES, CHIP 10 (1005)
R401	1-208-935-81	s	RES, CHIP 100K (1005)
R402	1-208-935-81	s	RES, CHIP 100K (1005)
R403	1-208-935-81	s	RES, CHIP 100K (1005)
R404	1-208-935-81	s	RES, CHIP 100K (1005)
R405	1-220-870-81	s	RES, CHIP 10 (1005)
R406	1-208-927-81	s	RES, CHIP 47K (1005)
R407	1-208-927-81	s	RES, CHIP 47K (1005)
R408	1-208-927-81	s	RES, CHIP 47K (1005)
R409	1-208-927-81	s	RES, CHIP 47K (1005)
R410	1-208-919-81	s	RES, CHIP 22K (1005)
R411	1-208-919-81	s	RES, CHIP 22K (1005)
R412	1-208-919-81	s	RES, CHIP 22K (1005)
R413	1-208-919-81	s	RES, CHIP 22K (1005)
R414	1-208-887-81	s	RES, CHIP 1.0K (1005)
R415	1-208-911-81	s	RES, CHIP 10K (1005)
R416	1-208-895-81	s	RES, CHIP 2.2K (1005)
R417	1-208-895-81	s	RES, CHIP 2.2K (1005)
R418	1-208-895-81	s	RES, CHIP 2.2K (1005)
R419	1-208-895-81	s	RES, CHIP 2.2K (1005)
R420	1-208-919-81	s	RES, CHIP 22K (1005)
R421	1-208-919-81	s	RES, CHIP 22K (1005)
R422	1-208-927-81	s	RES, CHIP 47K (1005)
R423	1-208-927-81	s	RES, CHIP 47K (1005)
R424	1-208-863-81	s	RES, CHIP 100 (1005)
R425	1-208-863-81	s	RES, CHIP 100 (1005)
R426	1-208-863-81	s	RES, CHIP 100 (1005)
R427	1-208-863-81	s	RES, CHIP 100 (1005)
R430	1-208-863-81	s	RES, CHIP 100 (1005)
R431	1-208-863-81	s	RES, CHIP 100 (1005)
R432	1-208-887-81	s	RES, CHIP 1.0K (1005)
R433	1-208-863-81	s	RES, CHIP 100 (1005)
R434	1-208-863-81	s	RES, CHIP 100 (1005)
R435	1-208-863-81	s	RES, CHIP 100 (1005)
R436	1-208-863-81	s	RES, CHIP 100 (1005)
R437	1-208-863-81	s	RES, CHIP 100 (1005)
R438	1-208-863-81	s	RES, CHIP 100 (1005)

(AT-167 BOARD suffix 13, 14, 31)

Ref. No. or Q'ty	Part No.	SP	Description
R440	1-208-927-81	s	RES, CHIP 47K (1005)
R441	1-208-927-81	s	RES, CHIP 47K (1005)
R442	1-208-927-81	s	RES, CHIP 47K (1005)
R445	1-208-863-81	s	RES, CHIP 100 (1005)
R446	1-208-863-81	s	RES, CHIP 100 (1005)
R447	1-208-863-81	s	RES, CHIP 100 (1005)
R448	1-220-870-81	s	RES, CHIP 10 (1005)
R449	1-220-870-81	s	RES, CHIP 10 (1005)
R450	1-208-919-81	s	RES, CHIP 22K (1005)
R451	1-208-911-81	s	RES, CHIP 10K (1005)
R452	1-220-870-81	s	RES, CHIP 10 (1005)
R453	1-208-887-81	s	RES, CHIP 1.0K (1005)
R454	1-208-927-81	s	RES, CHIP 47K (1005)
R455	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R456	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R457	1-208-927-81	s	RES, CHIP 47K (1005)
R458	1-208-927-81	s	RES, CHIP 47K (1005)
R459	1-208-911-81	s	RES, CHIP 10K (1005)
R460	1-208-911-81	s	RES, CHIP 10K (1005)
R461	1-208-911-81	s	RES, CHIP 10K (1005)
R462	1-208-911-81	s	RES, CHIP 10K (1005)
R463	1-208-927-81	s	RES, CHIP 47K (1005)
R464	1-208-935-81	s	RES, CHIP 100K (1005)
R467	1-208-863-81	s	RES, CHIP 100 (1005)
R468	1-208-863-81	s	RES, CHIP 100 (1005)
R469	1-208-863-81	s	RES, CHIP 100 (1005)
R470	1-208-863-81	s	RES, CHIP 100 (1005)
R471	1-208-903-81	s	RES, CHIP 4.7K (1005)
R472	1-208-923-81	s	RES, CHIP 33K (1005)
R473	1-208-903-81	s	RES, CHIP 4.7K (1005)
R474	1-208-935-81	s	RES, CHIP 100K (1005)
R476	1-208-903-81	s	RES, CHIP 4.7K (1005)
R477	1-208-903-81	s	RES, CHIP 4.7K (1005)
R478	1-208-911-81	s	RES, CHIP 10K (1005)
R479	1-208-911-81	s	RES, CHIP 10K (1005)
R480	1-208-927-81	s	RES, CHIP 47K (1005)
R481	1-208-935-81	s	RES, CHIP 100K (1005)
R482	1-208-871-81	s	RES, CHIP 220 (1005)
R483	1-208-875-81	s	RES, CHIP 330 (1005)
R484	1-208-875-81	s	RES, CHIP 330 (1005)
R485	1-208-863-81	s	RES, CHIP 100 (1005)
R486	1-208-871-81	s	RES, CHIP 220 (1005)
R488	1-208-863-81	s	RES, CHIP 100 (1005)
R489	1-208-863-81	s	RES, CHIP 100 (1005)
R490	1-208-863-81	s	RES, CHIP 100 (1005)
R492	1-208-887-81	s	RES, CHIP 1.0K (1005)
R493	1-208-887-81	s	RES, CHIP 1.0K (1005)
R494	1-208-887-81	s	RES, CHIP 1.0K (1005)
R495	1-208-887-81	s	RES, CHIP 1.0K (1005)
R496	1-208-887-81	s	RES, CHIP 1.0K (1005)
R497	1-208-935-81	s	RES, CHIP 100K (1005)
R498	1-208-935-81	s	RES, CHIP 100K (1005)
R499	1-208-935-81	s	RES, CHIP 100K (1005)
R500	1-208-935-81	s	RES, CHIP 100K (1005)
R501	1-208-935-81	s	RES, CHIP 100K (1005)
R502	1-208-935-81	s	RES, CHIP 100K (1005)
R503	1-208-887-81	s	RES, CHIP 1.0K (1005)
R504	1-208-887-81	s	RES, CHIP 1.0K (1005)
R505	1-208-887-81	s	RES, CHIP 1.0K (1005)

(AT-167 BOARD suffix 13, 14, 31)

Ref. No. or Q'ty	Part No.	SP	Description
R506	1-208-911-81	s	RES, CHIP 10K (1005)
R507	1-208-911-81	s	RES, CHIP 10K (1005)
R508	1-208-911-81	s	RES, CHIP 10K (1005)
R509	1-208-863-81	s	RES, CHIP 100 (1005)
R510	1-208-927-81	s	RES, CHIP 47K (1005)
R511	1-208-927-81	s	RES, CHIP 47K (1005)
R512	1-208-863-81	s	RES, CHIP 100 (1005)
R513	1-208-927-81	s	RES, CHIP 47K (1005)
R514	1-208-935-81	s	RES, CHIP 100K (1005)
R515	1-208-927-81	s	RES, CHIP 47K (1005)
R516	1-208-919-81	s	RES, CHIP 22K (1005)
R517	1-208-923-81	s	RES, CHIP 33K (1005)
R518	1-208-911-81	s	RES, CHIP 10K (1005)
R519	1-208-919-81	s	RES, CHIP 22K (1005)
R520	1-208-911-81	s	RES, CHIP 10K (1005)
R521	1-208-927-81	s	RES, CHIP 47K (1005)
R522	1-208-919-81	s	RES, CHIP 22K (1005)
R523	※2 1-218-990-81	s	CONDUCTOR, CHIP (1005)
R601	1-208-911-81	s	RES, CHIP 10K (1005)
R602	1-208-911-81	s	RES, CHIP 10K (1005)
R603	1-208-887-81	s	RES, CHIP 1.0K (1005)
R604	1-208-863-81	s	RES, CHIP 100 (1005)
R605	1-208-863-81	s	RES, CHIP 100 (1005)
R606	1-208-911-81	s	RES, CHIP 10K (1005)
R607	1-208-911-81	s	RES, CHIP 10K (1005)
R608	1-208-927-81	s	RES, CHIP 47K (1005)
R609	1-208-911-81	s	RES, CHIP 10K (1005)
R610	1-208-855-81	s	RES, CHIP 47 (1005)
R611	1-208-855-81	s	RES, CHIP 47 (1005)
R614	1-220-870-81	s	RES, CHIP 10 (1005)
R615	1-208-911-81	s	RES, CHIP 10K (1005)
R617	1-208-911-81	s	RES, CHIP 10K (1005)
R618	1-208-863-81	s	RES, CHIP 100 (1005)
R619	1-208-863-81	s	RES, CHIP 100 (1005)
R620	1-208-863-81	s	RES, CHIP 100 (1005)
R621	1-208-863-81	s	RES, CHIP 100 (1005)
R622	1-208-863-81	s	RES, CHIP 100 (1005)
R623	1-208-863-81	s	RES, CHIP 100 (1005)
R624	1-208-863-81	s	RES, CHIP 100 (1005)
R625	1-208-863-81	s	RES, CHIP 100 (1005)
R626	1-208-863-81	s	RES, CHIP 100 (1005)
R627	1-208-863-81	s	RES, CHIP 100 (1005)
R628	1-208-863-81	s	RES, CHIP 100 (1005)
R629	1-208-863-81	s	RES, CHIP 100 (1005)
R630	1-220-870-81	s	RES, CHIP 10 (1005)
R631	1-208-895-81	s	RES, CHIP 2.2K (1005)
R633	1-208-863-81	s	RES, CHIP 100 (1005)
R700	1-208-883-81	s	RES, CHIP 680 (1005)
R701	1-208-875-81	s	RES, CHIP 330 (1005)
R702	1-208-887-81	s	RES, CHIP 1.0K (1005)
R703	1-208-879-81	s	RES, CHIP 470 (1005)
R704	1-208-863-81	s	RES, CHIP 100 (1005)
R705	1-208-863-81	s	RES, CHIP 100 (1005)
R706	1-208-863-81	s	RES, CHIP 100 (1005)
R707	1-208-891-81	s	RES, CHIP 1.5K (1005)
R709	1-208-903-81	s	RES, CHIP 4.7K (1005)
R710	1-208-927-81	s	RES, CHIP 47K (1005)
R711	1-208-863-81	s	RES, CHIP 100 (1005)
R712	1-208-863-81	s	RES, CHIP 100 (1005)

(AT-167 BOARD suffix 13, 14, 31)

Ref. No. or Q'ty	Part No.	SP	Description
R713	1-208-863-81	s	RES, CHIP 100 (1005)
R714	1-208-895-81	s	RES, CHIP 2.2K (1005)
R715	1-208-887-81	s	RES, CHIP 1.0K (1005)
R716	1-208-919-81	s	RES, CHIP 22K (1005)
R717	1-208-855-81	s	RES, CHIP 47 (1005)
R718	1-208-855-81	s	RES, CHIP 47 (1005)
R719	1-208-871-81	s	RES, CHIP 220 (1005)
R720	1-208-863-81	s	RES, CHIP 100 (1005)
R721	1-208-863-81	s	RES, CHIP 100 (1005)
R722	1-208-895-81	s	RES, CHIP 2.2K (1005)
R723	1-208-895-81	s	RES, CHIP 2.2K (1005)
R724	1-208-915-81	s	RES, CHIP 15K (1005)
R725	1-208-887-81	s	RES, CHIP 1.0K (1005)
R726	1-220-870-81	s	RES, CHIP 10 (1005)
R727	1-208-855-81	s	RES, CHIP 47 (1005)
R729	1-208-863-81	s	RES, CHIP 100 (1005)
R730	1-208-879-81	s	RES, CHIP 470 (1005)
R731	1-220-870-81	s	RES, CHIP 10 (1005)
R732	1-220-870-81	s	RES, CHIP 10 (1005)
R733	1-208-895-81	s	RES, CHIP 2.2K (1005)
R734	1-220-870-81	s	RES, CHIP 10 (1005)
R735	1-220-870-81	s	RES, CHIP 10 (1005)
R736	1-208-863-81	s	RES, CHIP 100 (1005)
R737	1-208-875-81	s	RES, CHIP 330 (1005)
R738	1-208-871-81	s	RES, CHIP 220 (1005)
R739	1-208-915-81	s	RES, CHIP 15K (1005)
R740	1-220-870-81	s	RES, CHIP 10 (1005)
R741	1-208-903-81	s	RES, CHIP 4.7K (1005)
R742	1-220-870-81	s	RES, CHIP 10 (1005)
R743	1-208-903-81	s	RES, CHIP 4.7K (1005)
R744	1-208-863-81	s	RES, CHIP 100 (1005)
R745	1-208-899-81	s	RES, CHIP 3.3K (1005)
R746	1-208-911-81	s	RES, CHIP 10K (1005)
R747	1-208-879-81	s	RES, CHIP 470 (1005)
R748	1-208-911-81	s	RES, CHIP 10K (1005)
R749	1-208-863-81	s	RES, CHIP 100 (1005)
R750	1-208-879-81	s	RES, CHIP 470 (1005)
R751	1-208-903-81	s	RES, CHIP 4.7K (1005)
R752	1-208-911-81	s	RES, CHIP 10K (1005)
R753	1-208-919-81	s	RES, CHIP 22K (1005)
R754	1-208-903-81	s	RES, CHIP 4.7K (1005)
R755	1-208-855-81	s	RES, CHIP 47 (1005)
R756	1-208-895-81	s	RES, CHIP 2.2K (1005)
R757	1-208-911-81	s	RES, CHIP 10K (1005)
R758	1-208-919-81	s	RES, CHIP 22K (1005)
R759	1-208-915-81	s	RES, CHIP 15K (1005)
R760	1-208-879-81	s	RES, CHIP 470 (1005)
R761	1-208-879-81	s	RES, CHIP 470 (1005)
R762	1-208-919-81	s	RES, CHIP 22K (1005)
R763	1-208-947-81	s	RES, CHIP 330K (1005)
R764	1-208-955-81	s	RES, CHIP 680K (1005)
R765	1-208-899-81	s	RES, CHIP 3.3K (1005)
R766	1-208-911-81	s	RES, CHIP 10K (1005)
R767	1-208-863-81	s	RES, CHIP 100 (1005)
R768	1-208-863-81	s	RES, CHIP 100 (1005)
R769	1-208-911-81	s	RES, CHIP 10K (1005)
R770	1-208-863-81	s	RES, CHIP 100 (1005)
R771	1-208-903-81	s	RES, CHIP 4.7K (1005)
R772	1-208-863-81	s	RES, CHIP 100 (1005)

(AT-167 BOARD suffix 13, 14, 31)

Ref. No. or Q'ty	Part No.	SP	Description
R773	1-208-863-81	s	RES, CHIP 100 (1005)
R774	1-208-903-81	s	RES, CHIP 4.7K (1005)
R775	1-208-863-81	s	RES, CHIP 100 (1005)
R776	1-208-863-81	s	RES, CHIP 100 (1005)
R777	1-208-895-81	s	RES, CHIP 2.2K (1005)
R778	1-208-863-81	s	RES, CHIP 100 (1005)
R779	1-208-855-81	s	RES, CHIP 47 (1005)
R780	1-208-935-81	s	RES, CHIP 100K (1005)
R781	1-208-863-81	s	RES, CHIP 100 (1005)
R782	1-208-863-81	s	RES, CHIP 100 (1005)
R783	1-208-855-81	s	RES, CHIP 47 (1005)
R784	1-208-863-81	s	RES, CHIP 100 (1005)
R785	1-208-863-81	s	RES, CHIP 100 (1005)
R786	1-208-863-81	s	RES, CHIP 100 (1005)
R787	1-208-863-81	s	RES, CHIP 100 (1005)
R788	1-208-903-81	s	RES, CHIP 4.7K (1005)
R789	1-208-903-81	s	RES, CHIP 4.7K (1005)
R790	1-208-863-81	s	RES, CHIP 100 (1005)
R791	1-208-863-81	s	RES, CHIP 100 (1005)
R792	1-208-863-81	s	RES, CHIP 100 (1005)
R793	1-208-955-81	s	RES, CHIP 680K (1005)
R794	1-208-863-81	s	RES, CHIP 100 (1005)
R795	1-208-919-81	s	RES, CHIP 22K (1005)
R796	1-208-911-81	s	RES, CHIP 10K (1005)
R797	1-208-895-81	s	RES, CHIP 2.2K (1005)
R798	1-208-903-81	s	RES, CHIP 4.7K (1005)
R799	1-208-919-81	s	RES, CHIP 22K (1005)
R800	1-208-895-81	s	RES, CHIP 2.2K (1005)
R801	1-208-863-81	s	RES, CHIP 100 (1005)
R802	1-208-863-81	s	RES, CHIP 100 (1005)
R803	1-208-927-81	s	RES, CHIP 47K (1005)
R804	1-208-927-81	s	RES, CHIP 47K (1005)
R805	1-208-855-81	s	RES, CHIP 47 (1005)
R806	1-208-887-81	s	RES, CHIP 1.0K (1005)
R807	1-208-903-81	s	RES, CHIP 4.7K (1005)
R808	1-208-911-81	s	RES, CHIP 10K (1005)
R809	1-208-911-81	s	RES, CHIP 10K (1005)
R810	1-208-895-81	s	RES, CHIP 2.2K (1005)
R811	1-244-161-81	s	RES, CHIP 2.2 (1005)
R812	1-244-161-81	s	RES, CHIP 2.2 (1005)
R813	1-244-161-81	s	RES, CHIP 2.2 (1005)
R814	1-244-161-81	s	RES, CHIP 2.2 (1005)
R815	1-208-919-81	s	RES, CHIP 22K (1005)
R816	1-220-870-81	s	RES, CHIP 10 (1005)
R817	1-208-907-81	s	RES, CHIP 6.8K (1005)
R818	1-244-161-81	s	RES, CHIP 2.2 (1005)
R819	1-208-863-81	s	RES, CHIP 100 (1005)
R820	1-220-870-81	s	RES, CHIP 10 (1005)
R821	1-220-870-81	s	RES, CHIP 10 (1005)
R822	1-208-955-81	s	RES, CHIP 680K (1005)
R823	1-208-939-81	s	RES, CHIP 150K (1005)
R824	1-208-951-81	s	RES, CHIP 470K (1005)
R825	1-220-870-81	s	RES, CHIP 10 (1005)
R826	1-208-935-81	s	RES, CHIP 100K (1005)
R827	1-208-895-81	s	RES, CHIP 2.2K (1005)
R828	1-208-863-81	s	RES, CHIP 100 (1005)
R829	1-208-895-81	s	RES, CHIP 2.2K (1005)
R830	1-208-895-81	s	RES, CHIP 2.2K (1005)
R831	1-220-870-81	s	RES, CHIP 10 (1005)

(AT-167 BOARD suffix 13, 14, 31)

Ref. No. or Q'ty	Part No.	SP	Description
R832	1-220-870-81	s	RES, CHIP 10 (1005)
R833	1-208-887-81	s	RES, CHIP 1.0K (1005)
R834	1-208-895-81	s	RES, CHIP 2.2K (1005)
R835	1-244-161-81	s	RES, CHIP 2.2 (1005)
R836	1-244-161-81	s	RES, CHIP 2.2 (1005)
R837	1-244-161-81	s	RES, CHIP 2.2 (1005)
R839	1-208-855-81	s	RES, CHIP 47 (1005)
R840	1-208-863-81	s	RES, CHIP 100 (1005)
R841	1-208-903-81	s	RES, CHIP 4.7K (1005)
R842	1-208-855-81	s	RES, CHIP 47 (1005)
R843	1-208-855-81	s	RES, CHIP 47 (1005)
R844	1-208-899-81	s	RES, CHIP 3.3K (1005)
R845	1-208-919-81	s	RES, CHIP 22K (1005)
R846	1-208-863-81	s	RES, CHIP 100 (1005)
R847	1-208-895-81	s	RES, CHIP 2.2K (1005)
R848	1-208-911-81	s	RES, CHIP 10K (1005)
R851	1-208-919-81	s	RES, CHIP 22K (1005)
R852	1-208-915-81	s	RES, CHIP 15K (1005)
R853	1-208-911-81	s	RES, CHIP 10K (1005)
R854	1-208-863-81	s	RES, CHIP 100 (1005)
R855	1-208-919-81	s	RES, CHIP 22K (1005)
R856	1-208-947-81	s	RES, CHIP 330K (1005)
R857	1-208-855-81	s	RES, CHIP 47 (1005)
R858	1-208-903-81	s	RES, CHIP 4.7K (1005)
R859	1-208-855-81	s	RES, CHIP 47 (1005)
R861	1-208-863-81	s	RES, CHIP 100 (1005)
R862	1-208-863-81	s	RES, CHIP 100 (1005)
R863	1-208-899-81	s	RES, CHIP 3.3K (1005)
R864	1-208-911-81	s	RES, CHIP 10K (1005)
R865	1-208-863-81	s	RES, CHIP 100 (1005)
R866	1-208-911-81	s	RES, CHIP 10K (1005)
R867	1-208-863-81	s	RES, CHIP 100 (1005)
R868	1-208-911-81	s	RES, CHIP 10K (1005)
R869	1-208-863-81	s	RES, CHIP 100 (1005)
R870	1-208-903-81	s	RES, CHIP 4.7K (1005)
R871	1-208-907-81	s	RES, CHIP 6.8K (1005)
R872	1-208-887-81	s	RES, CHIP 1.0K (1005)
R879	1-208-903-81	s	RES, CHIP 4.7K (1005)
R880	1-208-863-81	s	RES, CHIP 100 (1005)
R883	1-208-863-81	s	RES, CHIP 100 (1005)
R885	1-208-863-81	s	RES, CHIP 100 (1005)
R887	1-208-863-81	s	RES, CHIP 100 (1005)
R888	1-208-863-81	s	RES, CHIP 100 (1005)
R889	1-208-863-81	s	RES, CHIP 100 (1005)
R890	1-208-863-81	s	RES, CHIP 100 (1005)
R891	1-208-863-81	s	RES, CHIP 100 (1005)
R893	1-208-863-81	s	RES, CHIP 100 (1005)
R894	1-208-863-81	s	RES, CHIP 100 (1005)
R897	1-208-863-81	s	RES, CHIP 100 (1005)
R900	1-208-903-81	s	RES, CHIP 4.7K (1005)
R902	1-208-903-81	s	RES, CHIP 4.7K (1005)
R903	1-208-911-81	s	RES, CHIP 10K (1005)
R904	1-208-911-81	s	RES, CHIP 10K (1005)
R905	1-208-911-81	s	RES, CHIP 10K (1005)
R906	1-208-895-81	s	RES, CHIP 2.2K (1005)
R907	1-208-895-81	s	RES, CHIP 2.2K (1005)
R908	1-208-923-81	s	RES, CHIP 33K (1005)
R909	1-208-895-81	s	RES, CHIP 2.2K (1005)
R910	1-220-870-81	s	RES, CHIP 10 (1005)

(AT-167 BOARD suffix 13, 14, 31)

Ref. No. or Q'ty	Part No.	SP	Description
R911	1-208-895-81	s	RES, CHIP 2.2K (1005)
R912	1-208-927-81	s	RES, CHIP 47K (1005)
R913	1-208-927-81	s	RES, CHIP 47K (1005)
R914	1-208-887-81	s	RES, CHIP 1.0K (1005)
R915	1-220-870-81	s	RES, CHIP 10 (1005)
R916	1-220-870-81	s	RES, CHIP 10 (1005)
R917	1-220-870-81	s	RES, CHIP 10 (1005)
R918	1-208-903-81	s	RES, CHIP 4.7K (1005)
R919	1-208-911-81	s	RES, CHIP 10K (1005)
R920	1-208-911-81	s	RES, CHIP 10K (1005)
R921	1-208-903-81	s	RES, CHIP 4.7K (1005)
R922	1-208-935-81	s	RES, CHIP 100K (1005)
R923	1-244-161-81	s	RES, CHIP 2.2 (1005)
R924	1-208-891-81	s	RES, CHIP 1.5K (1005)
R925	1-208-891-81	s	RES, CHIP 1.5K (1005)
R926	1-208-891-81	s	RES, CHIP 1.5K (1005)
R927	1-208-911-81	s	RES, CHIP 10K (1005)
R928	1-208-903-81	s	RES, CHIP 4.7K (1005)
R929	1-244-161-81	s	RES, CHIP 2.2 (1005)
R930	1-244-161-81	s	RES, CHIP 2.2 (1005)
R931	1-244-161-81	s	RES, CHIP 2.2 (1005)
R932	1-208-935-81	s	RES, CHIP 100K (1005)
R933	1-244-161-81	s	RES, CHIP 2.2 (1005)
R934	1-208-871-81	s	RES, CHIP 220 (1005)
R935	1-208-871-81	s	RES, CHIP 220 (1005)
R936	1-208-863-81	s	RES, CHIP 100 (1005)
R937	1-208-863-81	s	RES, CHIP 100 (1005)
R938	1-208-911-81	s	RES, CHIP 10K (1005)
R939	1-208-915-81	s	RES, CHIP 15K (1005)
R940	1-208-887-81	s	RES, CHIP 1.0K (1005)
R941	1-208-899-81	s	RES, CHIP 3.3K (1005)
R942	1-208-919-81	s	RES, CHIP 22K (1005)
R943	1-208-887-81	s	RES, CHIP 1.0K (1005)
R944	1-208-899-81	s	RES, CHIP 3.3K (1005)
R945	1-208-919-81	s	RES, CHIP 22K (1005)
R946	1-208-871-81	s	RES, CHIP 220 (1005)
R947	1-208-863-81	s	RES, CHIP 100 (1005)
R948	1-208-895-81	s	RES, CHIP 2.2K (1005)
R950	1-208-875-81	s	RES, CHIP 330 (1005)
R954	1-208-863-81	s	RES, CHIP 100 (1005)
R958	1-208-867-81	s	RES, CHIP 150 (1005)
R959	1-208-887-81	s	RES, CHIP 1.0K (1005)
R960	1-208-867-81	s	RES, CHIP 150 (1005)
R961	1-208-887-81	s	RES, CHIP 1.0K (1005)
R962	1-220-870-81	s	RES, CHIP 10 (1005)
R963	1-220-870-81	s	RES, CHIP 10 (1005)
R964	1-220-870-81	s	RES, CHIP 10 (1005)
R965	1-220-870-81	s	RES, CHIP 10 (1005)
R966	1-220-870-81	s	RES, CHIP 10 (1005)
R967	1-220-870-81	s	RES, CHIP 10 (1005)
R969	1-208-863-81	s	RES, CHIP 100 (1005)
R970	1-208-863-81	s	RES, CHIP 100 (1005)
R972	1-208-855-81	s	RES, CHIP 47 (1005)
R973	1-208-855-81	s	RES, CHIP 47 (1005)
RB101	1-233-810-21	s	RES, NETWORK 100K (3216)
RB102	1-233-810-21	s	RES, NETWORK 100K (3216)
RB103	1-233-810-21	s	RES, NETWORK 100K (3216)
RB104	1-233-810-21	s	RES, NETWORK 100K (3216)
RB105	1-233-810-21	s	RES, NETWORK 100K (3216)

(AT-167 BOARD suffix 13, 14, 31)

Ref. No. or Q'ty	Part No.	SP	Description
RB106	1-233-810-21	s	RES, NETWORK 100K (3216)
RB107	1-233-810-21	s	RES, NETWORK 100K (3216)
RB108	1-233-810-21	s	RES, NETWORK 100K (3216)
RB109	1-233-810-21	s	RES, NETWORK 100K (3216)
RB110	1-233-810-21	s	RES, NETWORK 100K (3216)
RB111	1-233-810-21	s	RES, NETWORK 100K (3216)
RB112	1-233-810-21	s	RES, NETWORK 100K (3216)
RB113	1-233-810-21	s	RES, NETWORK 100K (3216)
RB114	1-233-810-21	s	RES, NETWORK 100K (3216)
RB115	1-233-810-21	s	RES, NETWORK 100K (3216)
RB116	1-233-810-21	s	RES, NETWORK 100K (3216)
RB117	1-233-810-21	s	RES, NETWORK 100K (3216)
RB118	1-233-810-21	s	RES, NETWORK 100K (3216)
RB119	1-233-423-21	s	RES, CHIP NETWORK 47 (3216)
RB120	1-233-423-21	s	RES, CHIP NETWORK 47 (3216)
RB121	1-233-423-21	s	RES, CHIP NETWORK 47 (3216)
RB123	1-233-423-21	s	RES, CHIP NETWORK 47 (3216)
RB124	1-233-423-21	s	RES, CHIP NETWORK 47 (3216)
RB125	1-233-423-21	s	RES, CHIP NETWORK 47 (3216)
RB126	1-233-423-21	s	RES, CHIP NETWORK 47 (3216)
RB401	1-233-810-21	s	RES, NETWORK 100K (3216)
RB402	1-233-810-21	s	RES, NETWORK 100K (3216)
RB403	1-233-810-21	s	RES, NETWORK 100K (3216)
RB404	1-233-810-21	s	RES, NETWORK 100K (3216)
RB405	1-233-810-21	s	RES, NETWORK 100K (3216)
RB406	1-233-810-21	s	RES, NETWORK 100K (3216)
RB407	1-233-810-21	s	RES, NETWORK 100K (3216)
RB420	1-233-412-21	s	RES, CHIP NETWORK 1.0K (3216)
RB421	1-233-412-21	s	RES, CHIP NETWORK 1.0K (3216)
RB422	1-233-412-21	s	RES, CHIP NETWORK 1.0K (3216)
RB423	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB424	1-233-412-21	s	RES, CHIP NETWORK 1.0K (3216)
RB425	1-233-412-21	s	RES, CHIP NETWORK 1.0K (3216)
RB426	1-233-412-21	s	RES, CHIP NETWORK 1.0K (3216)
RB427	1-233-412-21	s	RES, CHIP NETWORK 1.0K (3216)
RB428	1-233-412-21	s	RES, CHIP NETWORK 1.0K (3216)
RB429	1-233-412-21	s	RES, CHIP NETWORK 1.0K (3216)
RB430	1-233-412-21	s	RES, CHIP NETWORK 1.0K (3216)
RB431	1-233-412-21	s	RES, CHIP NETWORK 1.0K (3216)
RB701	1-233-576-21	s	RES, CHIP NETWORK 100 (3216)
RB703	1-233-576-21	s	RES, CHIP NETWORK 100 (3216)
RB709	1-233-574-21	s	RES, CHIP NETWORK 10 (3216)
RB710	1-233-423-21	s	RES, CHIP NETWORK 47 (3216)
RB714	1-233-574-21	s	RES, CHIP NETWORK 10 (3216)
RB715	1-233-574-21	s	RES, CHIP NETWORK 10 (3216)
RB716	1-233-423-21	s	RES, CHIP NETWORK 47 (3216)
RB717	1-233-423-21	s	RES, CHIP NETWORK 47 (3216)
RV701	1-225-791-21	s	RES, ADJ, CERMET 5K
RV702	1-225-793-21	s	RES, ADJ, CERMET 20K
S101	1-771-709-41	s	SWITCH, SLIDE
S102	1-771-709-41	s	SWITCH, SLIDE
S103	1-771-709-41	s	SWITCH, SLIDE
S104	1-771-709-41	s	SWITCH, SLIDE
S401	1-762-118-21	s	SWITCH, TOGGLE
S402	1-762-120-21	s	SWITCH, TOGGLE
S403	1-572-658-21	s	SWITCH, ROTARY
S404	1-572-658-21	s	SWITCH, ROTARY
S405	1-572-658-21	s	SWITCH, ROTARY

(AT-167 BOARD suffix 13, 14, 31)

Ref. No. or Q'ty	Part No.	SP	Description
S406	1-692-271-41	s	SWITCH, SLIDE
S407	1-692-271-41	s	SWITCH, SLIDE
S408	1-692-271-41	s	SWITCH, SLIDE
S409	1-692-271-41	s	SWITCH, SLIDE
S410	1-762-217-31	s	SWITCH, SLIDE
S411	1-570-711-33	s	SWITCH, SLIDE
S412	1-570-711-33	s	SWITCH, SLIDE
S413	1-570-711-33	s	SWITCH, SLIDE
S416	1-762-217-31	s	SWITCH, SLIDE
S418	1-762-217-31	s	SWITCH, SLIDE
S419	1-762-217-31	s	SWITCH, SLIDE
S420	1-762-217-31	s	SWITCH, SLIDE
THP1	1-533-817-21	s	THERMISTOR
THP2	1-533-817-21	s	THERMISTOR
THP3	1-804-458-21	s	THERMISTOR, POSITIVE
THP4	1-804-458-21	s	THERMISTOR, POSITIVE
THP101	1-803-353-21	s	THERMISTOR, POSITIVE
TP601	1-535-877-22	s	CHIP, CHECKER
TP701	1-535-877-22	s	CHIP, CHECKER
TP702	1-535-877-22	s	CHIP, CHECKER
TP703	1-535-877-22	s	CHIP, CHECKER
TP704	1-535-877-22	s	CHIP, CHECKER
TP705	1-535-877-22	s	CHIP, CHECKER
TP709	1-535-877-22	s	CHIP, CHECKER
TP711	1-535-877-22	s	CHIP, CHECKER
TP712	1-535-877-22	s	CHIP, CHECKER
TP713	1-535-877-22	s	CHIP, CHECKER
TP714	1-535-877-22	s	CHIP, CHECKER
X301	1-813-007-21	s	OSCILLATOR, CRYSTAL (SMD)
X302	1-795-177-21	s	OSCILLATOR, CRYSTAL
X701	1-813-212-11	s	OSCILLATOR, CRYSTAL
X702	1-795-671-12	s	OSCILLATOR, CRYSTAL (VCXO)3.3V
X703	1-795-670-12	s	OSCILLATOR, CRYSTAL (VCXO)3.3V

AT-167 BOARD (suffix 12)

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1129-299-A	s	MOUNTED CIRCUIT BOARD, AT-167
1pc	1-528-174-11	s	BATTERY, LITHIUM (CR2032 TYPE)
4pcs	7-682-947-01	s	SCREW +PSW 3X6
BT101	1-756-076-21	s	HOLDER, LITHIUM BATTERY
C1	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C5	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C6	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C7	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C8	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C9	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C10	1-127-573-91	s	CAP, CHIP CERAMIC 1MF B (2012)
C11	1-127-573-91	s	CAP, CHIP CERAMIC 1MF B (2012)
C12	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C13	1-126-391-21	s	CAP, CHIP ELECT 47MF (5X5.7)
C14	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C15	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C16	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C18	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C19	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C20	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C21	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C22	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C23	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C24	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C25	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C26	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C28	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C29	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C30	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C31	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C33	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C34	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C35	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C37	1-126-391-21	s	CAP, CHIP ELECT 47MF (5X5.7)
C38	1-126-391-21	s	CAP, CHIP ELECT 47MF (5X5.7)
C39	1-126-391-21	s	CAP, CHIP ELECT 47MF (5X5.7)
C41	1-126-391-21	s	CAP, CHIP ELECT 47MF (5X5.7)
C101	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C102	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C103	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C104	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C105	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C107	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C108	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C109	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C110	1-104-905-11	s	CAP, DOUBLE LAYERS 0.22F
C111	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C112	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C113	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C115	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C117	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C118	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C119	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C120	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C121	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(AT-167 BOARD suffix 12)

Ref. No. or Q'ty	Part No.	SP	Description
C122	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C123	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C124	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C125	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C126	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C127	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C128	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C129	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C130	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C131	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C132	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C133	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C134	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C135	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C136	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C137	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C138	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C139	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C140	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C141	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C142	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C143	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C144	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C145	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C146	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C147	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C148	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C149	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C150	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C151	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C152	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C153	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C154	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C155	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C156	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C157	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C158	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C159	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C160	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C161	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C162	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C163	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C164	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C165	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C166	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C167	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C168	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C169	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C170	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C171	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C172	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C173	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C174	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C175	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C176	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C177	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C178	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C179	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C180	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216

(AT-167 BOARD suffix 12)

Ref. No. or Q'ty	Part No.	SP	Description
C181	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C182	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C183	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C184	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C185	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C186	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C187	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C188	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C189	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C190	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C191	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C192	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C193	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C194	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C195	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C301	1-164-862-81	s	CAP, CHIP CERAMIC 33PF CH 1005
C302	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C303	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C304	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C305	1-164-862-81	s	CAP, CHIP CERAMIC 33PF CH 1005
C306	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C307	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C308	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C309	1-126-391-21	s	CAP, CHIP ELECT 47MF (5X5.7)
C310	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C311	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C312	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C313	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C314	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C315	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C316	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C317	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C318	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C319	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C320	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C321	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C323	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C324	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C325	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C326	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C327	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C328	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C329	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C330	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C331	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C332	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C333	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C334	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C335	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C336	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C337	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C338	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C339	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C340	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C341	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C342	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C343	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C344	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C401	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(AT-167 BOARD suffix 12)

Ref. No. or Q'ty	Part No.	SP	Description
C402	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C403	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C404	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C407	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C408	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C409	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C410	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C413	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C414	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C415	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C416	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C417	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C418	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C419	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C601	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C602	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C605	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C606	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C607	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C608	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C609	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C610	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C611	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C612	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C613	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C614	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C615	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C616	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C617	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C618	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C619	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C620	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C621	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C622	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C623	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C624	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C625	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C626	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C627	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C628	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C629	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C630	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C631	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C632	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C701	1-126-391-21	s	CAP, CHIP ELECT 47MF (5X5.7)
C702	1-126-391-21	s	CAP, CHIP ELECT 47MF (5X5.7)
C703	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C704	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C705	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C706	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C708	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C709	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C710	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C711	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C712	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C713	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C716	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C717	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C718	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216

(AT-167 BOARD suffix 12)

Ref. No. or Q'ty	Part No.	SP	Description
C719	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C720	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C721	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C722	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C723	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C724	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C725	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C726	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C727	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C728	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C729	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C730	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C731	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C732	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C733	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C734	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C735	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C736	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C738	1-126-391-21	s	CAP, CHIP ELECT 47MF (5X5.7)
C739	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C740	1-126-391-21	s	CAP, CHIP ELECT 47MF (5X5.7)
C741	1-164-882-81	s	CAP,CHIP CERAMIC 220PF CH 1005
C742	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C743	1-164-882-81	s	CAP,CHIP CERAMIC 220PF CH 1005
C744	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C745	1-125-891-91	s	CAP, CHIP CERAMIC0.47MF B 1608
C746	1-126-391-21	s	CAP, CHIP ELECT 47MF (5X5.7)
C747	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C748	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C749	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C750	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C751	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C752	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C753	1-126-391-21	s	CAP, CHIP ELECT 47MF (5X5.7)
C754	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C755	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C756	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C757	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C758	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C759	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C760	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C761	1-164-878-81	s	CAP,CHIP CERAMIC 150PF CH 1005
C762	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C763	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C764	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C765	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C766	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C767	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C768	1-127-956-21	s	CAP, CHIP FILM 0.1MF (3225)
C769	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C770	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C771	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C772	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C773	1-127-956-21	s	CAP, CHIP FILM 0.1MF (3225)
C774	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C775	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C776	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C777	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C778	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216

(AT-167 BOARD suffix 12)

Ref. No. or Q'ty	Part No.	SP	Description
C779	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C780	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C781	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C782	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C783	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C784	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C785	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C786	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C787	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C789	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C790	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C791	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C792	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C793	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C796	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C798	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C799	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C801	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C802	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C803	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C804	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C805	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C806	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C807	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C808	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C809	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C810	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C811	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C812	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C813	1-125-891-91	s	CAP, CHIP CERAMIC0.47MF B 1608
C814	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C815	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C816	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C817	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C818	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C819	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C820	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C821	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C822	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C823	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C827	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C829	1-164-878-81	s	CAP,CHIP CERAMIC 150PF CH 1005
C830	1-126-391-21	s	CAP, CHIP ELECT 47MF (5X5.7)
C831	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C833	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C834	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C835	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C836	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C837	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C840	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C841	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C842	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C843	1-127-956-21	s	CAP, CHIP FILM 0.1MF (3225)
C844	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C845	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C846	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C847	1-127-956-21	s	CAP, CHIP FILM 0.1MF (3225)
C848	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C849	1-127-956-21	s	CAP, CHIP FILM 0.1MF (3225)

(AT-167 BOARD suffix 12)

Ref. No. or Q'ty	Part No.	SP	Description
C850	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C851	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C852	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C853	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C854	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C855	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C856	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C857	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C858	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C859	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C860	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C861	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C862	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C863	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C864	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C865	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C866	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C867	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C868	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C870	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C871	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C873	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C874	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C875	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C876	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
CN103	1-794-917-11	s	CONNECTOR, MEMORY STICK
CN104	1-793-093-91	o	CONNECTOR, BOARD TO BOARD 60P
CN301	1-580-057-21	s	PIN, CONNECTOR (SMD) 4P
CN601	1-764-093-21	o	PIN, CONNECTOR (PC BOARD) 8P
D1	8-719-017-03	s	DIODE 02DZ4.7-TPH3
D2	8-719-017-03	s	DIODE 02DZ4.7-TPH3
D4	8-719-074-31	s	DIODE CL-196YG-CD-T
D101	8-719-820-42	s	DIODE 1SS302-TE85L
D102	8-719-070-20	s	DIODE RB706F-40
D103	8-719-820-42	s	DIODE 1SS302-TE85L
D104	8-719-820-42	s	DIODE 1SS302-TE85L
D105	8-719-820-42	s	DIODE 1SS302-TE85L
D106	8-719-820-42	s	DIODE 1SS302-TE85L
D107	8-719-820-42	s	DIODE 1SS302-TE85L
D401	8-719-024-81	s	DIODE 1SS300-TE85L
D402	8-719-024-81	s	DIODE 1SS300-TE85L
D403	8-719-024-81	s	DIODE 1SS300-TE85L
D404	8-719-024-81	s	DIODE 1SS300-TE85L
D405	8-719-024-81	s	DIODE 1SS300-TE85L
D406	8-719-024-81	s	DIODE 1SS300-TE85L
D407	8-719-024-81	s	DIODE 1SS300-TE85L
D408	8-719-024-81	s	DIODE 1SS300-TE85L
D409	8-719-074-31	s	DIODE CL-196YG-CD-T
D410	8-719-077-09	s	DIODE CL-196HR-CD-T
D411	8-719-027-83	s	DIODE CL-155UR/G-DT
D412	8-719-027-83	s	DIODE CL-155UR/G-DT
D416	8-719-024-81	s	DIODE 1SS300-TE85L
D417	8-719-024-81	s	DIODE 1SS300-TE85L
D418	8-719-024-81	s	DIODE 1SS300-TE85L
D419	8-719-024-81	s	DIODE 1SS300-TE85L
D420	8-719-024-81	s	DIODE 1SS300-TE85L
D421	8-719-024-81	s	DIODE 1SS300-TE85L
D422	8-719-024-81	s	DIODE 1SS300-TE85L
D423	8-719-024-81	s	DIODE 1SS300-TE85L

(AT-167 BOARD suffix 12)

Ref. No. or Q'ty	Part No.	SP	Description
D425	8-719-024-81	s	DIODE 1SS300-TE85L
D427	8-719-024-81	s	DIODE 1SS300-TE85L
D428	8-719-024-81	s	DIODE 1SS300-TE85L
D429	8-719-024-81	s	DIODE 1SS300-TE85L
D701	8-719-820-42	s	DIODE 1SS302-TE85L
D702	8-719-024-81	s	DIODE 1SS300-TE85L
D703	8-719-820-42	s	DIODE 1SS302-TE85L
D704	8-719-820-42	s	DIODE 1SS302-TE85L
D705	8-719-820-42	s	DIODE 1SS302-TE85L
D706	8-719-820-42	s	DIODE 1SS302-TE85L
D707	8-719-820-42	s	DIODE 1SS302-TE85L
D708	8-719-820-42	s	DIODE 1SS302-TE85L
D709	8-719-070-20	s	DIODE RB706F-40
E1	1-535-877-22	s	CHIP, CHECKER
E2	1-535-877-22	s	CHIP, CHECKER
E4	1-535-877-22	s	CHIP, CHECKER
FB701	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB702	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB703	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB704	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
IC1	6-704-976-01	s	IC ADR381ARTZ-REEL7
IC2	6-700-655-01	s	IC LT1963ES8#TR
IC3	8-759-327-01	s	IC NJM062V(TE2)
IC4	8-759-327-01	s	IC NJM062V(TE2)
IC6	8-759-338-95	s	IC NJM2903V(TE2)
IC101	8-759-678-06	s	IC CAT24WC02WI-TE13
IC102	8-759-523-01	s	IC TC74HC4052AFT(EL)
IC103	8-759-363-26	s	IC RN5VD28AA-TL-FA
IC104	8-759-669-71	s	IC PCF8591T/2
IC105	8-759-648-04	s	IC RTC-4574JE
IC106	8-759-669-44	s	IC SN74LVC74APWR-12
IC107	6-703-461-11	s	IC CY2309ZXC-1HT
IC108	6-706-488-01	s	IC TC7SH14FU(T5RSOYJF)
IC110	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC111	8-759-669-42	s	IC SN74LVC138APWR-12
IC112	8-759-669-42	s	IC SN74LVC138APWR-12
IC113	8-759-669-42	s	IC SN74LVC138APWR-12
IC114	8-759-669-68	s	IC SN74CBT3253PWR-12
IC116	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC118	8-759-557-85	s	IC NC7SZ32P5X
IC119	6-705-721-01	s	IC MT48LC8M16A2P-75-Y15WTR
IC120	6-705-721-01	s	IC MT48LC8M16A2P-75-Y15WTR
IC121	8-759-669-42	s	IC SN74LVC138APWR-12
IC122	6-704-988-01	s	IC FM18L08-70-STR
IC123	6-704-988-01	s	IC FM18L08-70-STR
IC124	8-759-543-64	s	IC NC7SZ08P5X
IC125	8-759-669-44	s	IC SN74LVC74APWR-12
IC126	8-759-557-84	s	IC NC7SZ04P5X
IC127	8-759-557-84	s	IC NC7SZ04P5X
IC128	8-759-543-64	s	IC NC7SZ08P5X
IC129	8-759-584-32	s	IC MB86189PFV-G-BND-ER-E1
IC130	6-706-484-01	s	IC TC7SH04FU(T5RSOYJF)
IC131	8-759-327-01	s	IC NJM062V(TE2)
IC132	6-706-484-01	s	IC TC7SH04FU(T5RSOYJF)
IC133	6-706-488-01	s	IC TC7SH14FU(T5RSOYJF)
IC134	6-706-488-01	s	IC TC7SH14FU(T5RSOYJF)
IC135	6-706-483-01	s	IC TC7SH02FU(T5RSOYJF)
IC136	6-706-488-01	s	IC TC7SH14FU(T5RSOYJF)

(AT-167 BOARD suffix 12)

Ref. No. or Q'ty	Part No.	SP	Description
IC137	8-759-472-43	s	IC 74VHC245MTCX
IC138	8-759-472-43	s	IC 74VHC245MTCX
IC139	8-759-472-43	s	IC 74VHC245MTCX
IC140	8-759-472-43	s	IC 74VHC245MTCX
IC141	8-759-679-55	s	IC SN74LVC08APWR
IC142	8-759-679-55	s	IC SN74LVC08APWR
IC143	8-759-679-55	s	IC SN74LVC08APWR
IC144	8-759-327-01	s	IC NJM062V(TE2)
IC145	8-759-669-66	s	IC TLC272CPWR-12
IC146	8-759-543-64	s	IC NC7SZ08P5X
IC147	8-759-543-64	s	IC NC7SZ08P5X
IC148	8-759-543-64	s	IC NC7SZ08P5X
IC149	8-759-679-55	s	IC SN74LVC08APWR
IC150	8-759-543-64	s	IC NC7SZ08P5X
IC151	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC301	8-759-594-17	o	IC CXD9093R
IC302	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC303	6-706-484-01	s	IC TC7SH04FU(T5RSOYJF)
IC304	8-759-594-17	o	IC CXD9093R
IC305	6-702-691-01	s	IC BCM5221A4KPT
IC306	8-759-531-92	s	IC TC7WH04FU(TE12R)
IC307	8-759-471-91	s	IC 74VHC04MTCX
IC308	8-759-092-83	s	IC SN75158PSR
IC309	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC401	8-752-392-03	s	IC CXD1095BR
IC402	6-706-357-01	s	IC LTC1664IGN#TR
IC403	8-759-662-38	s	IC 74VHCT08AMTCX
IC406	8-759-531-92	s	IC TC7WH04FU(TE12R)
IC407	8-752-392-03	s	IC CXD1095BR
IC408	8-759-472-43	s	IC 74VHC245MTCX
IC409	8-759-531-92	s	IC TC7WH04FU(TE12R)
IC410	8-759-471-96	s	IC 74VHC08MTCX
IC411	8-759-471-96	s	IC 74VHC08MTCX
IC602	8-759-363-26	s	IC RN5VD28AA-TL-FA
IC607	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC701	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC702	8-759-327-14	s	IC TL712CPSR
IC703	8-759-327-14	s	IC TL712CPSR
IC704	8-759-327-14	s	IC TL712CPSR
IC705	8-759-344-12	s	IC GS4981CTAE3
IC706	8-759-669-41	s	IC SN74LVC125APWR-12
IC707	8-759-662-38	s	IC 74VHCT08AMTCX
IC708	8-759-485-24	s	IC MC74HC4046ADTR2
IC709	8-759-184-65	s	IC TC4W66FU(TE12R)
IC710	8-759-564-49	s	IC TC7W53FU(TE12R)
IC711	8-759-564-49	s	IC TC7W53FU(TE12R)
IC712	8-759-675-47	s	IC SN74LVC04APWR
IC713	8-759-675-47	s	IC SN74LVC04APWR
IC715	8-759-675-47	s	IC SN74LVC04APWR
IC717	6-700-804-01	s	IC SN74LVC574APWR
IC718	8-759-564-49	s	IC TC7W53FU(TE12R)
IC719	8-759-344-12	s	IC GS4981CTAE3
IC720	8-759-327-14	s	IC TL712CPSR
IC722	8-759-485-24	s	IC MC74HC4046ADTR2
IC723	8-759-564-49	s	IC TC7W53FU(TE12R)
IC724	8-759-564-49	s	IC TC7W53FU(TE12R)
IC726	6-700-804-01	s	IC SN74LVC574APWR
IC727	8-759-471-91	s	IC 74VHC04MTCX
IC728	8-759-561-46	s	IC AD8014ARTZ-REEL7

(AT-167 BOARD suffix 12)

Ref. No. or Q'ty	Part No.	SP	Description
IC729	8-759-669-41	s	IC SN74LVC125APWR-12
IC730	8-759-675-47	s	IC SN74LVC04APWR
IC732	8-759-669-66	s	IC TLC272CPWR-12
IC733	8-759-669-66	s	IC TLC272CPWR-12
IC734	8-759-669-66	s	IC TLC272CPWR-12
IC735	8-759-669-66	s	IC TLC272CPWR-12
IC736	8-759-669-66	s	IC TLC272CPWR-12
IC737	8-759-669-66	s	IC TLC272CPWR-12
IC738	8-759-669-66	s	IC TLC272CPWR-12
IC739	6-706-484-01	s	IC TC7SH04FU(T5RSOYJF)
IC740	8-759-669-41	s	IC SN74LVC125APWR-12
IC741	8-759-663-35	s	IC 74VHC4053MTCX
IC742	8-759-663-35	s	IC 74VHC4053MTCX
IC743	8-759-523-04	s	IC TC74HC4538AFT(EL)
IC744	6-706-476-01	s	IC TC7SET04FU(T5RSOJF)
IC745	6-706-476-01	s	IC TC7SET04FU(T5RSOJF)
IC746	6-706-489-01	s	IC TC7SH32FU(T5RSOYJF)
IC747	6-706-478-01	s	IC TC7SET08FU(T5RSOJF)
IC748	6-706-478-01	s	IC TC7SET08FU(T5RSOJF)
IC749	8-759-523-04	s	IC TC74HC4538AFT(EL)
IC750	8-759-669-41	s	IC SN74LVC125APWR-12
IC751	6-706-484-01	s	IC TC7SH04FU(T5RSOYJF)
IC752	6-706-489-01	s	IC TC7SH32FU(T5RSOYJF)
IC753	6-706-484-01	s	IC TC7SH04FU(T5RSOYJF)
IC755	6-706-484-01	s	IC TC7SH04FU(T5RSOYJF)
IC756	8-759-531-92	s	IC TC7WH04FU(TE12R)
IC757	6-706-478-01	s	IC TC7SET08FU(T5RSOJF)
IC758	6-706-478-01	s	IC TC7SET08FU(T5RSOJF)
IC759	8-759-592-42	s	IC TC7SZ00FU(TE85R)
IC760	8-759-592-42	s	IC TC7SZ00FU(TE85R)
IC761	8-759-592-42	s	IC TC7SZ00FU(TE85R)
IC762	8-759-592-42	s	IC TC7SZ00FU(TE85R)
L1	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L101	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L102	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L103	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L104	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L105	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L106	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L107	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L108	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L109	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L110	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L111	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L113	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L114	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L301	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L302	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L303	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L304	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L305	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L401	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L601	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L602	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L701	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L702	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L703	1-414-396-41	s	INDUCTOR (SMD) 4.7UH
L704	1-414-398-41	s	INDUCTOR (SMD) 10.0UH

(AT-167 BOARD suffix 12)

Ref. No. or Q'ty	Part No.	SP	Description
L705	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L706	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L707	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L708	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L709	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L710	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L711	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L712	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L713	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L714	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L715	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L716	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L717	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L718	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L719	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L720	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L724	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L725	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L726	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L727	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L728	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L729	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L730	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L733	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L734	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L735	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L736	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L737	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L738	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L739	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L740	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L741	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L742	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L743	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
PH1	8-749-011-37	s	PHOTO COUPLER TLP181(BL-TPR)
PH301	8-749-014-35	s	IC HCPL-0630-500
PH302	8-749-014-35	s	IC HCPL-0630-500
Q1	8-729-035-99	s	TRANSISTOR 2SA1615-Z-E2
Q2	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q3	8-729-209-73	s	TRANSISTOR 2SA1213Y-TE12L
Q4	8-729-209-77	s	TRANSISTOR 2SC2873Y-TE12L
Q5	8-729-047-32	s	TRANSISTOR SI4425DY-T1
Q6	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q101	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q102	8-729-209-73	s	TRANSISTOR 2SA1213Y-TE12L
Q301	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q401	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q402	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q403	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q404	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q405	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q406	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q407	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q408	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q409	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q410	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q411	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q412	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR

(AT-167 BOARD suffix 12)

Ref. No. or Q'ty	Part No.	SP	Description
Q413	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q414	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q415	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q416	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q417	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q418	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q419	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q701	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q702	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q703	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q704	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q705	8-729-142-11	s	TRANSISTOR 2SA1226-T1E3E4
Q706	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q707	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q708	8-729-142-11	s	TRANSISTOR 2SA1226-T1E3E4
Q709	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q710	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
R1	1-208-863-81	s	RES, CHIP 100 (1005)
R2	1-208-875-81	s	RES, CHIP 330 (1005)
R3	1-208-863-81	s	RES, CHIP 100 (1005)
R4	1-208-919-81	s	RES, CHIP 22K (1005)
R5	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R6	1-208-871-81	s	RES, CHIP 220 (1005)
R7	1-208-871-81	s	RES, CHIP 220 (1005)
R8	1-208-871-81	s	RES, CHIP 220 (1005)
R9	1-208-911-81	s	RES, CHIP 10K (1005)
R10	1-208-911-81	s	RES, CHIP 10K (1005)
R11	1-208-923-81	s	RES, CHIP 33K (1005)
R12	1-208-923-81	s	RES, CHIP 33K (1005)
R13	1-208-923-81	s	RES, CHIP 33K (1005)
R14	1-208-923-81	s	RES, CHIP 33K (1005)
R15	1-208-927-81	s	RES, CHIP 47K (1005)
R16	1-208-911-81	s	RES, CHIP 10K (1005)
R17	1-208-911-81	s	RES, CHIP 10K (1005)
R18	1-208-919-81	s	RES, CHIP 22K (1005)
R19	1-208-907-81	s	RES, CHIP 6.8K (1005)
R20	1-208-923-81	s	RES, CHIP 33K (1005)
R22	1-208-931-81	s	RES, CHIP 68K (1005)
R23	1-208-931-81	s	RES, CHIP 68K (1005)
R33	1-208-927-81	s	RES, CHIP 47K (1005)
R34	1-208-915-81	s	RES, CHIP 15K (1005)
R35	1-208-915-81	s	RES, CHIP 15K (1005)
R36	1-208-919-81	s	RES, CHIP 22K (1005)
R41	1-208-887-81	s	RES, CHIP 1.0K (1005)
R43	1-208-927-81	s	RES, CHIP 47K (1005)
R44	1-208-935-81	s	RES, CHIP 100K (1005)
R48	1-208-895-81	s	RES, CHIP 2.2K (1005)
R49	1-208-911-81	s	RES, CHIP 10K (1005)
R50	1-208-919-81	s	RES, CHIP 22K (1005)
R51	1-208-911-81	s	RES, CHIP 10K (1005)
R101	1-220-870-81	s	RES, CHIP 10 (1005)
R102	1-208-911-81	s	RES, CHIP 10K (1005)
R103	1-208-911-81	s	RES, CHIP 10K (1005)
R104	1-208-887-81	s	RES, CHIP 1.0K (1005)
R105	1-208-915-81	s	RES, CHIP 15K (1005)
R106	1-208-863-81	s	RES, CHIP 100 (1005)
R107	1-208-863-81	s	RES, CHIP 100 (1005)
R108	1-208-887-81	s	RES, CHIP 1.0K (1005)

(AT-167 BOARD suffix 12)

Ref. No. or Q'ty	Part No.	SP	Description
R109	1-208-863-81	s	RES, CHIP 100 (1005)
R110	1-208-935-81	s	RES, CHIP 100K (1005)
R111	1-208-911-81	s	RES, CHIP 10K (1005)
R112	1-208-911-81	s	RES, CHIP 10K (1005)
R113	1-208-855-81	s	RES, CHIP 47 (1005)
R115	1-220-870-81	s	RES, CHIP 10 (1005)
R116	1-220-870-81	s	RES, CHIP 10 (1005)
R117	1-220-870-81	s	RES, CHIP 10 (1005)
R118	1-220-870-81	s	RES, CHIP 10 (1005)
R119	1-208-855-81	s	RES, CHIP 47 (1005)
R120	1-208-855-81	s	RES, CHIP 47 (1005)
R121	1-208-911-81	s	RES, CHIP 10K (1005)
R122	1-208-887-81	s	RES, CHIP 1.0K (1005)
R123	1-208-895-81	s	RES, CHIP 2.2K (1005)
R124	1-208-895-81	s	RES, CHIP 2.2K (1005)
R125	1-208-895-81	s	RES, CHIP 2.2K (1005)
R128	1-208-863-81	s	RES, CHIP 100 (1005)
R129	1-208-863-81	s	RES, CHIP 100 (1005)
R130	1-208-887-81	s	RES, CHIP 1.0K (1005)
R131	1-208-935-81	s	RES, CHIP 100K (1005)
R132	1-208-935-81	s	RES, CHIP 100K (1005)
R133	1-208-935-81	s	RES, CHIP 100K (1005)
R134	1-208-935-81	s	RES, CHIP 100K (1005)
R135	1-208-911-81	s	RES, CHIP 10K (1005)
R136	1-208-911-81	s	RES, CHIP 10K (1005)
R137	1-208-863-81	s	RES, CHIP 100 (1005)
R139	1-208-887-81	s	RES, CHIP 1.0K (1005)
R140	1-208-911-81	s	RES, CHIP 10K (1005)
R142	1-208-935-81	s	RES, CHIP 100K (1005)
R144	1-208-887-81	s	RES, CHIP 1.0K (1005)
R147	1-208-863-81	s	RES, CHIP 100 (1005)
R148	1-208-911-81	s	RES, CHIP 10K (1005)
R150	1-208-911-81	s	RES, CHIP 10K (1005)
R151	1-208-855-81	s	RES, CHIP 47 (1005)
R152	1-208-855-81	s	RES, CHIP 47 (1005)
R153	1-208-855-81	s	RES, CHIP 47 (1005)
R154	1-208-855-81	s	RES, CHIP 47 (1005)
R155	1-208-855-81	s	RES, CHIP 47 (1005)
R156	1-208-855-81	s	RES, CHIP 47 (1005)
R157	1-208-855-81	s	RES, CHIP 47 (1005)
R158	1-208-911-81	s	RES, CHIP 10K (1005)
R159	1-208-911-81	s	RES, CHIP 10K (1005)
R160	1-208-911-81	s	RES, CHIP 10K (1005)
R161	1-208-863-81	s	RES, CHIP 100 (1005)
R162	1-208-863-81	s	RES, CHIP 100 (1005)
R163	1-208-863-81	s	RES, CHIP 100 (1005)
R164	1-208-863-81	s	RES, CHIP 100 (1005)
R165	1-208-863-81	s	RES, CHIP 100 (1005)
R166	1-208-863-81	s	RES, CHIP 100 (1005)
R167	1-208-935-81	s	RES, CHIP 100K (1005)
R168	1-208-911-81	s	RES, CHIP 10K (1005)
R169	1-208-911-81	s	RES, CHIP 10K (1005)
R170	1-208-911-81	s	RES, CHIP 10K (1005)
R171	1-208-911-81	s	RES, CHIP 10K (1005)
R172	1-208-911-81	s	RES, CHIP 10K (1005)
R173	1-220-878-81	s	RES, CHIP 22 (1005)
R174	1-208-911-81	s	RES, CHIP 10K (1005)
R175	1-208-911-81	s	RES, CHIP 10K (1005)
R176	1-208-911-81	s	RES, CHIP 10K (1005)

(AT-167 BOARD suffix 12)

Ref. No. or Q'ty	Part No.	SP	Description
R177	1-208-911-81	s	RES, CHIP 10K (1005)
R178	1-208-911-81	s	RES, CHIP 10K (1005)
R179	1-220-878-81	s	RES, CHIP 22 (1005)
R180	1-220-878-81	s	RES, CHIP 22 (1005)
R181	1-208-855-81	s	RES, CHIP 47 (1005)
R182	1-208-855-81	s	RES, CHIP 47 (1005)
R183	1-208-855-81	s	RES, CHIP 47 (1005)
R184	1-208-855-81	s	RES, CHIP 47 (1005)
R185	1-208-855-81	s	RES, CHIP 47 (1005)
R186	1-208-863-81	s	RES, CHIP 100 (1005)
R187	1-208-911-81	s	RES, CHIP 10K (1005)
R188	1-208-935-81	s	RES, CHIP 100K (1005)
R189	1-208-863-81	s	RES, CHIP 100 (1005)
R190	1-208-935-81	s	RES, CHIP 100K (1005)
R191	1-208-935-81	s	RES, CHIP 100K (1005)
R192	1-208-855-81	s	RES, CHIP 47 (1005)
R193	1-208-855-81	s	RES, CHIP 47 (1005)
R194	1-220-870-81	s	RES, CHIP 10 (1005)
R195	1-208-935-81	s	RES, CHIP 100K (1005)
R196	1-208-911-81	s	RES, CHIP 10K (1005)
R197	1-208-911-81	s	RES, CHIP 10K (1005)
R198	1-208-911-81	s	RES, CHIP 10K (1005)
R199	1-208-911-81	s	RES, CHIP 10K (1005)
R200	1-208-911-81	s	RES, CHIP 10K (1005)
R201	1-208-935-81	s	RES, CHIP 100K (1005)
R202	1-208-911-81	s	RES, CHIP 10K (1005)
R203	1-208-911-81	s	RES, CHIP 10K (1005)
R204	1-208-911-81	s	RES, CHIP 10K (1005)
R205	1-208-935-81	s	RES, CHIP 100K (1005)
R206	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R207	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R209	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R210	1-208-911-81	s	RES, CHIP 10K (1005)
R211	1-208-911-81	s	RES, CHIP 10K (1005)
R212	1-220-870-81	s	RES, CHIP 10 (1005)
R213	1-208-935-81	s	RES, CHIP 100K (1005)
R214	1-208-911-81	s	RES, CHIP 10K (1005)
R215	1-208-887-81	s	RES, CHIP 1.0K (1005)
R216	1-220-878-81	s	RES, CHIP 22 (1005)
R217	1-220-878-81	s	RES, CHIP 22 (1005)
R218	1-220-878-81	s	RES, CHIP 22 (1005)
R219	1-220-878-81	s	RES, CHIP 22 (1005)
R220	1-220-878-81	s	RES, CHIP 22 (1005)
R221	1-220-878-81	s	RES, CHIP 22 (1005)
R222	1-208-935-81	s	RES, CHIP 100K (1005)
R223	1-208-935-81	s	RES, CHIP 100K (1005)
R224	1-208-935-81	s	RES, CHIP 100K (1005)
R225	1-208-935-81	s	RES, CHIP 100K (1005)
R227	1-208-927-81	s	RES, CHIP 47K (1005)
R228	1-208-927-81	s	RES, CHIP 47K (1005)
R229	1-208-919-81	s	RES, CHIP 22K (1005)
R230	1-208-911-81	s	RES, CHIP 10K (1005)
R231	1-208-899-81	s	RES, CHIP 3.3K (1005)
R232	1-208-863-81	s	RES, CHIP 100 (1005)
R233	1-208-855-81	s	RES, CHIP 47 (1005)
R234	1-208-863-81	s	RES, CHIP 100 (1005)
R235	1-208-935-81	s	RES, CHIP 100K (1005)
R236	1-208-935-81	s	RES, CHIP 100K (1005)
R237	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(AT-167 BOARD suffix 12)

Ref. No. or Q'ty	Part No.	SP	Description
R240	1-220-870-81	s	RES, CHIP 10 (1005)
R241	1-220-870-81	s	RES, CHIP 10 (1005)
R242	1-208-855-81	s	RES, CHIP 47 (1005)
R243	1-208-855-81	s	RES, CHIP 47 (1005)
R245	1-220-870-81	s	RES, CHIP 10 (1005)
R246	1-208-863-81	s	RES, CHIP 100 (1005)
R247	1-208-887-81	s	RES, CHIP 1.0K (1005)
R301	1-208-863-81	s	RES, CHIP 100 (1005)
R302	1-208-863-81	s	RES, CHIP 100 (1005)
R303	1-208-871-81	s	RES, CHIP 220 (1005)
R304	1-208-907-81	s	RES, CHIP 6.8K (1005)
R305	1-208-911-81	s	RES, CHIP 10K (1005)
R306	1-208-907-81	s	RES, CHIP 6.8K (1005)
R307	1-208-863-81	s	RES, CHIP 100 (1005)
R308	1-220-870-81	s	RES, CHIP 10 (1005)
R309	1-220-870-81	s	RES, CHIP 10 (1005)
R310	1-220-882-81	s	RES, CHIP 33 (1005)
R311	1-208-911-81	s	RES, CHIP 10K (1005)
R312	1-208-907-81	s	RES, CHIP 6.8K (1005)
R313	1-208-907-81	s	RES, CHIP 6.8K (1005)
R314	1-220-870-81	s	RES, CHIP 10 (1005)
R315	1-208-895-81	s	RES, CHIP 2.2K (1005)
R316	1-208-911-81	s	RES, CHIP 10K (1005)
R317	1-208-911-81	s	RES, CHIP 10K (1005)
R318	1-208-911-81	s	RES, CHIP 10K (1005)
R319	1-208-911-81	s	RES, CHIP 10K (1005)
R320	1-208-911-81	s	RES, CHIP 10K (1005)
R321	1-208-887-81	s	RES, CHIP 1.0K (1005)
R322	1-208-887-81	s	RES, CHIP 1.0K (1005)
R323	1-208-887-81	s	RES, CHIP 1.0K (1005)
R324	1-208-887-81	s	RES, CHIP 1.0K (1005)
R325	1-208-911-81	s	RES, CHIP 10K (1005)
R326	1-208-911-81	s	RES, CHIP 10K (1005)
R327	1-208-911-81	s	RES, CHIP 10K (1005)
R328	1-208-871-81	s	RES, CHIP 220 (1005)
R329	1-208-911-81	s	RES, CHIP 10K (1005)
R330	1-208-911-81	s	RES, CHIP 10K (1005)
R331	1-208-927-81	s	RES, CHIP 47K (1005)
R332	1-208-895-81	s	RES, CHIP 2.2K (1005)
R333	1-208-887-81	s	RES, CHIP 1.0K (1005)
R334	1-208-927-81	s	RES, CHIP 47K (1005)
R335	1-208-871-81	s	RES, CHIP 220 (1005)
R337	1-208-911-81	s	RES, CHIP 10K (1005)
R338	1-208-911-81	s	RES, CHIP 10K (1005)
R339	1-208-911-81	s	RES, CHIP 10K (1005)
R340	1-208-911-81	s	RES, CHIP 10K (1005)
R341	1-208-887-81	s	RES, CHIP 1.0K (1005)
R342	1-208-887-81	s	RES, CHIP 1.0K (1005)
R343	1-208-887-81	s	RES, CHIP 1.0K (1005)
R344	1-208-911-81	s	RES, CHIP 10K (1005)
R345	1-208-911-81	s	RES, CHIP 10K (1005)
R346	1-208-911-81	s	RES, CHIP 10K (1005)
R347	1-220-878-81	s	RES, CHIP 22 (1005)
R348	1-208-903-81	s	RES, CHIP 4.7K (1005)
R349	1-208-887-81	s	RES, CHIP 1.0K (1005)
R350	1-208-871-81	s	RES, CHIP 220 (1005)
R351	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R352	1-220-882-81	s	RES, CHIP 33 (1005)
R353	1-220-882-81	s	RES, CHIP 33 (1005)

(AT-167 BOARD suffix 12)

Ref. No. or Q'ty	Part No.	SP	Description
R354	1-208-863-81	s	RES, CHIP 100 (1005)
R355	1-208-863-81	s	RES, CHIP 100 (1005)
R356	1-208-863-81	s	RES, CHIP 100 (1005)
R357	1-208-863-81	s	RES, CHIP 100 (1005)
R358	1-208-863-81	s	RES, CHIP 100 (1005)
R359	1-208-863-81	s	RES, CHIP 100 (1005)
R360	1-208-863-81	s	RES, CHIP 100 (1005)
R361	1-208-863-81	s	RES, CHIP 100 (1005)
R362	1-208-891-81	s	RES, CHIP 1.5K (1005)
R363	1-208-903-81	s	RES, CHIP 4.7K (1005)
R364	1-220-870-81	s	RES, CHIP 10 (1005)
R401	1-208-935-81	s	RES, CHIP 100K (1005)
R402	1-208-935-81	s	RES, CHIP 100K (1005)
R403	1-208-935-81	s	RES, CHIP 100K (1005)
R404	1-208-935-81	s	RES, CHIP 100K (1005)
R405	1-220-870-81	s	RES, CHIP 10 (1005)
R406	1-208-927-81	s	RES, CHIP 47K (1005)
R407	1-208-927-81	s	RES, CHIP 47K (1005)
R408	1-208-927-81	s	RES, CHIP 47K (1005)
R409	1-208-927-81	s	RES, CHIP 47K (1005)
R410	1-208-919-81	s	RES, CHIP 22K (1005)
R411	1-208-919-81	s	RES, CHIP 22K (1005)
R412	1-208-919-81	s	RES, CHIP 22K (1005)
R413	1-208-919-81	s	RES, CHIP 22K (1005)
R414	1-208-887-81	s	RES, CHIP 1.0K (1005)
R415	1-208-911-81	s	RES, CHIP 10K (1005)
R416	1-208-895-81	s	RES, CHIP 2.2K (1005)
R417	1-208-895-81	s	RES, CHIP 2.2K (1005)
R418	1-208-895-81	s	RES, CHIP 2.2K (1005)
R419	1-208-895-81	s	RES, CHIP 2.2K (1005)
R420	1-208-919-81	s	RES, CHIP 22K (1005)
R421	1-208-919-81	s	RES, CHIP 22K (1005)
R422	1-208-927-81	s	RES, CHIP 47K (1005)
R423	1-208-927-81	s	RES, CHIP 47K (1005)
R424	1-208-863-81	s	RES, CHIP 100 (1005)
R425	1-208-863-81	s	RES, CHIP 100 (1005)
R426	1-208-863-81	s	RES, CHIP 100 (1005)
R427	1-208-863-81	s	RES, CHIP 100 (1005)
R430	1-208-863-81	s	RES, CHIP 100 (1005)
R431	1-208-863-81	s	RES, CHIP 100 (1005)
R432	1-208-887-81	s	RES, CHIP 1.0K (1005)
R433	1-208-863-81	s	RES, CHIP 100 (1005)
R434	1-208-863-81	s	RES, CHIP 100 (1005)
R435	1-208-863-81	s	RES, CHIP 100 (1005)
R436	1-208-863-81	s	RES, CHIP 100 (1005)
R437	1-208-863-81	s	RES, CHIP 100 (1005)
R438	1-208-863-81	s	RES, CHIP 100 (1005)
R440	1-208-927-81	s	RES, CHIP 47K (1005)
R441	1-208-927-81	s	RES, CHIP 47K (1005)
R442	1-208-927-81	s	RES, CHIP 47K (1005)
R445	1-208-863-81	s	RES, CHIP 100 (1005)
R446	1-208-863-81	s	RES, CHIP 100 (1005)
R447	1-208-863-81	s	RES, CHIP 100 (1005)
R448	1-220-870-81	s	RES, CHIP 10 (1005)
R449	1-220-870-81	s	RES, CHIP 10 (1005)
R450	1-208-919-81	s	RES, CHIP 22K (1005)
R451	1-208-911-81	s	RES, CHIP 10K (1005)
R452	1-220-870-81	s	RES, CHIP 10 (1005)
R453	1-208-887-81	s	RES, CHIP 1.0K (1005)

(AT-167 BOARD suffix 12)

Ref. No. or Q'ty	Part No.	SP	Description
R454	1-208-927-81	s	RES, CHIP 47K (1005)
R455	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R456	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R457	1-208-927-81	s	RES, CHIP 47K (1005)
R458	1-208-927-81	s	RES, CHIP 47K (1005)
R459	1-208-911-81	s	RES, CHIP 10K (1005)
R460	1-208-911-81	s	RES, CHIP 10K (1005)
R461	1-208-911-81	s	RES, CHIP 10K (1005)
R462	1-208-911-81	s	RES, CHIP 10K (1005)
R463	1-208-927-81	s	RES, CHIP 47K (1005)
R464	1-208-935-81	s	RES, CHIP 100K (1005)
R467	1-208-863-81	s	RES, CHIP 100 (1005)
R468	1-208-863-81	s	RES, CHIP 100 (1005)
R469	1-208-863-81	s	RES, CHIP 100 (1005)
R470	1-208-863-81	s	RES, CHIP 100 (1005)
R471	1-208-903-81	s	RES, CHIP 4.7K (1005)
R472	1-208-923-81	s	RES, CHIP 33K (1005)
R473	1-208-903-81	s	RES, CHIP 4.7K (1005)
R474	1-208-935-81	s	RES, CHIP 100K (1005)
R476	1-208-903-81	s	RES, CHIP 4.7K (1005)
R477	1-208-903-81	s	RES, CHIP 4.7K (1005)
R478	1-208-911-81	s	RES, CHIP 10K (1005)
R479	1-208-911-81	s	RES, CHIP 10K (1005)
R480	1-208-927-81	s	RES, CHIP 47K (1005)
R481	1-208-935-81	s	RES, CHIP 100K (1005)
R482	1-208-871-81	s	RES, CHIP 220 (1005)
R483	1-208-875-81	s	RES, CHIP 330 (1005)
R484	1-208-875-81	s	RES, CHIP 330 (1005)
R485	1-208-863-81	s	RES, CHIP 100 (1005)
R486	1-208-871-81	s	RES, CHIP 220 (1005)
R487	1-208-935-81	s	RES, CHIP 100K (1005)
R488	1-208-863-81	s	RES, CHIP 100 (1005)
R489	1-208-863-81	s	RES, CHIP 100 (1005)
R490	1-208-863-81	s	RES, CHIP 100 (1005)
R492	1-208-887-81	s	RES, CHIP 1.0K (1005)
R493	1-208-887-81	s	RES, CHIP 1.0K (1005)
R494	1-208-887-81	s	RES, CHIP 1.0K (1005)
R495	1-208-887-81	s	RES, CHIP 1.0K (1005)
R496	1-208-887-81	s	RES, CHIP 1.0K (1005)
R497	1-208-935-81	s	RES, CHIP 100K (1005)
R498	1-208-935-81	s	RES, CHIP 100K (1005)
R499	1-208-935-81	s	RES, CHIP 100K (1005)
R500	1-208-935-81	s	RES, CHIP 100K (1005)
R501	1-208-935-81	s	RES, CHIP 100K (1005)
R502	1-208-935-81	s	RES, CHIP 100K (1005)
R503	1-208-887-81	s	RES, CHIP 1.0K (1005)
R504	1-208-887-81	s	RES, CHIP 1.0K (1005)
R505	1-208-887-81	s	RES, CHIP 1.0K (1005)
R506	1-208-935-81	s	RES, CHIP 100K (1005)
R507	1-208-935-81	s	RES, CHIP 100K (1005)
R508	1-208-935-81	s	RES, CHIP 100K (1005)
R509	1-208-863-81	s	RES, CHIP 100 (1005)
R510	1-208-927-81	s	RES, CHIP 47K (1005)
R511	1-208-927-81	s	RES, CHIP 47K (1005)
R512	1-208-863-81	s	RES, CHIP 100 (1005)
R513	1-208-927-81	s	RES, CHIP 47K (1005)
R514	1-208-935-81	s	RES, CHIP 100K (1005)
R515	1-208-927-81	s	RES, CHIP 47K (1005)
R516	1-208-919-81	s	RES, CHIP 22K (1005)

(AT-167 BOARD suffix 12)

Ref. No. or Q'ty	Part No.	SP	Description
R517	1-208-923-81	s	RES, CHIP 33K (1005)
R518	1-208-911-81	s	RES, CHIP 10K (1005)
R519	1-208-919-81	s	RES, CHIP 22K (1005)
R520	1-208-911-81	s	RES, CHIP 10K (1005)
R521	1-208-927-81	s	RES, CHIP 47K (1005)
R522	1-208-919-81	s	RES, CHIP 22K (1005)
R601	1-208-911-81	s	RES, CHIP 10K (1005)
R602	1-208-911-81	s	RES, CHIP 10K (1005)
R603	1-208-887-81	s	RES, CHIP 1.0K (1005)
R604	1-208-863-81	s	RES, CHIP 100 (1005)
R605	1-208-863-81	s	RES, CHIP 100 (1005)
R606	1-208-911-81	s	RES, CHIP 10K (1005)
R607	1-208-911-81	s	RES, CHIP 10K (1005)
R608	1-208-927-81	s	RES, CHIP 47K (1005)
R609	1-208-911-81	s	RES, CHIP 10K (1005)
R610	1-208-855-81	s	RES, CHIP 47 (1005)
R611	1-208-855-81	s	RES, CHIP 47 (1005)
R614	1-220-870-81	s	RES, CHIP 10 (1005)
R615	1-208-911-81	s	RES, CHIP 10K (1005)
R617	1-208-911-81	s	RES, CHIP 10K (1005)
R618	1-208-863-81	s	RES, CHIP 100 (1005)
R619	1-208-863-81	s	RES, CHIP 100 (1005)
R620	1-208-863-81	s	RES, CHIP 100 (1005)
R621	1-208-863-81	s	RES, CHIP 100 (1005)
R622	1-208-863-81	s	RES, CHIP 100 (1005)
R623	1-208-863-81	s	RES, CHIP 100 (1005)
R624	1-208-863-81	s	RES, CHIP 100 (1005)
R625	1-208-863-81	s	RES, CHIP 100 (1005)
R626	1-208-863-81	s	RES, CHIP 100 (1005)
R627	1-208-863-81	s	RES, CHIP 100 (1005)
R628	1-208-863-81	s	RES, CHIP 100 (1005)
R629	1-208-863-81	s	RES, CHIP 100 (1005)
R630	1-220-870-81	s	RES, CHIP 10 (1005)
R631	1-208-895-81	s	RES, CHIP 2.2K (1005)
R633	1-208-863-81	s	RES, CHIP 100 (1005)
R700	1-208-883-81	s	RES, CHIP 680 (1005)
R701	1-208-875-81	s	RES, CHIP 330 (1005)
R702	1-208-887-81	s	RES, CHIP 1.0K (1005)
R703	1-208-879-81	s	RES, CHIP 470 (1005)
R704	1-208-863-81	s	RES, CHIP 100 (1005)
R705	1-208-863-81	s	RES, CHIP 100 (1005)
R706	1-208-863-81	s	RES, CHIP 100 (1005)
R707	1-208-891-81	s	RES, CHIP 1.5K (1005)
R709	1-208-903-81	s	RES, CHIP 4.7K (1005)
R710	1-208-927-81	s	RES, CHIP 47K (1005)
R711	1-208-863-81	s	RES, CHIP 100 (1005)
R712	1-208-863-81	s	RES, CHIP 100 (1005)
R713	1-208-863-81	s	RES, CHIP 100 (1005)
R714	1-208-895-81	s	RES, CHIP 2.2K (1005)
R715	1-208-887-81	s	RES, CHIP 1.0K (1005)
R716	1-208-919-81	s	RES, CHIP 22K (1005)
R717	1-208-855-81	s	RES, CHIP 47 (1005)
R718	1-208-855-81	s	RES, CHIP 47 (1005)
R719	1-208-871-81	s	RES, CHIP 220 (1005)
R720	1-208-863-81	s	RES, CHIP 100 (1005)
R721	1-208-863-81	s	RES, CHIP 100 (1005)
R722	1-208-895-81	s	RES, CHIP 2.2K (1005)
R723	1-208-895-81	s	RES, CHIP 2.2K (1005)
R724	1-208-915-81	s	RES, CHIP 15K (1005)

(AT-167 BOARD suffix 12)

Ref. No. or Q'ty	Part No.	SP	Description
R725	1-208-887-81	s	RES, CHIP 1.0K (1005)
R726	1-220-870-81	s	RES, CHIP 10 (1005)
R727	1-208-855-81	s	RES, CHIP 47 (1005)
R729	1-208-863-81	s	RES, CHIP 100 (1005)
R730	1-208-879-81	s	RES, CHIP 470 (1005)
R731	1-220-870-81	s	RES, CHIP 10 (1005)
R732	1-220-870-81	s	RES, CHIP 10 (1005)
R733	1-208-895-81	s	RES, CHIP 2.2K (1005)
R734	1-220-870-81	s	RES, CHIP 10 (1005)
R735	1-220-870-81	s	RES, CHIP 10 (1005)
R736	1-208-863-81	s	RES, CHIP 100 (1005)
R737	1-208-875-81	s	RES, CHIP 330 (1005)
R738	1-208-871-81	s	RES, CHIP 220 (1005)
R739	1-208-915-81	s	RES, CHIP 15K (1005)
R740	1-220-870-81	s	RES, CHIP 10 (1005)
R741	1-208-903-81	s	RES, CHIP 4.7K (1005)
R742	1-220-870-81	s	RES, CHIP 10 (1005)
R743	1-208-903-81	s	RES, CHIP 4.7K (1005)
R744	1-208-863-81	s	RES, CHIP 100 (1005)
R745	1-208-899-81	s	RES, CHIP 3.3K (1005)
R746	1-208-911-81	s	RES, CHIP 10K (1005)
R747	1-208-879-81	s	RES, CHIP 470 (1005)
R748	1-208-911-81	s	RES, CHIP 10K (1005)
R749	1-208-863-81	s	RES, CHIP 100 (1005)
R750	1-208-879-81	s	RES, CHIP 470 (1005)
R751	1-208-903-81	s	RES, CHIP 4.7K (1005)
R752	1-208-911-81	s	RES, CHIP 10K (1005)
R753	1-208-919-81	s	RES, CHIP 22K (1005)
R754	1-208-903-81	s	RES, CHIP 4.7K (1005)
R755	1-208-855-81	s	RES, CHIP 47 (1005)
R756	1-208-895-81	s	RES, CHIP 2.2K (1005)
R757	1-208-911-81	s	RES, CHIP 10K (1005)
R758	1-208-919-81	s	RES, CHIP 22K (1005)
R759	1-208-915-81	s	RES, CHIP 15K (1005)
R760	1-208-879-81	s	RES, CHIP 470 (1005)
R761	1-208-879-81	s	RES, CHIP 470 (1005)
R762	1-208-919-81	s	RES, CHIP 22K (1005)
R763	1-208-947-81	s	RES, CHIP 330K (1005)
R764	1-208-955-81	s	RES, CHIP 680K (1005)
R765	1-208-899-81	s	RES, CHIP 3.3K (1005)
R766	1-208-911-81	s	RES, CHIP 10K (1005)
R767	1-208-863-81	s	RES, CHIP 100 (1005)
R768	1-208-863-81	s	RES, CHIP 100 (1005)
R769	1-208-911-81	s	RES, CHIP 10K (1005)
R770	1-208-863-81	s	RES, CHIP 100 (1005)
R771	1-208-903-81	s	RES, CHIP 4.7K (1005)
R772	1-208-863-81	s	RES, CHIP 100 (1005)
R773	1-208-863-81	s	RES, CHIP 100 (1005)
R774	1-208-903-81	s	RES, CHIP 4.7K (1005)
R775	1-208-863-81	s	RES, CHIP 100 (1005)
R776	1-208-863-81	s	RES, CHIP 100 (1005)
R777	1-208-895-81	s	RES, CHIP 2.2K (1005)
R778	1-208-863-81	s	RES, CHIP 100 (1005)
R779	1-208-855-81	s	RES, CHIP 47 (1005)
R780	1-208-935-81	s	RES, CHIP 100K (1005)
R781	1-208-863-81	s	RES, CHIP 100 (1005)
R782	1-208-863-81	s	RES, CHIP 100 (1005)
R783	1-208-855-81	s	RES, CHIP 47 (1005)
R784	1-208-863-81	s	RES, CHIP 100 (1005)

(AT-167 BOARD suffix 12)

Ref. No. or Q'ty	Part No.	SP	Description
R785	1-208-863-81	s	RES, CHIP 100 (1005)
R786	1-208-863-81	s	RES, CHIP 100 (1005)
R787	1-208-863-81	s	RES, CHIP 100 (1005)
R788	1-208-903-81	s	RES, CHIP 4.7K (1005)
R789	1-208-903-81	s	RES, CHIP 4.7K (1005)
R790	1-208-863-81	s	RES, CHIP 100 (1005)
R791	1-208-863-81	s	RES, CHIP 100 (1005)
R792	1-208-863-81	s	RES, CHIP 100 (1005)
R793	1-208-955-81	s	RES, CHIP 680K (1005)
R794	1-208-863-81	s	RES, CHIP 100 (1005)
R795	1-208-919-81	s	RES, CHIP 22K (1005)
R796	1-208-911-81	s	RES, CHIP 10K (1005)
R797	1-208-895-81	s	RES, CHIP 2.2K (1005)
R798	1-208-903-81	s	RES, CHIP 4.7K (1005)
R799	1-208-919-81	s	RES, CHIP 22K (1005)
R800	1-208-895-81	s	RES, CHIP 2.2K (1005)
R801	1-208-863-81	s	RES, CHIP 100 (1005)
R802	1-208-863-81	s	RES, CHIP 100 (1005)
R803	1-208-927-81	s	RES, CHIP 47K (1005)
R804	1-208-927-81	s	RES, CHIP 47K (1005)
R805	1-208-855-81	s	RES, CHIP 47 (1005)
R806	1-208-887-81	s	RES, CHIP 1.0K (1005)
R807	1-208-903-81	s	RES, CHIP 4.7K (1005)
R808	1-208-911-81	s	RES, CHIP 10K (1005)
R809	1-208-911-81	s	RES, CHIP 10K (1005)
R810	1-208-895-81	s	RES, CHIP 2.2K (1005)
R811	1-244-161-81	s	RES, CHIP 2.2 (1005)
R812	1-244-161-81	s	RES, CHIP 2.2 (1005)
R813	1-244-161-81	s	RES, CHIP 2.2 (1005)
R814	1-244-161-81	s	RES, CHIP 2.2 (1005)
R815	1-208-919-81	s	RES, CHIP 22K (1005)
R816	1-220-870-81	s	RES, CHIP 10 (1005)
R817	1-208-907-81	s	RES, CHIP 6.8K (1005)
R818	1-244-161-81	s	RES, CHIP 2.2 (1005)
R819	1-208-863-81	s	RES, CHIP 100 (1005)
R820	1-220-870-81	s	RES, CHIP 10 (1005)
R821	1-220-870-81	s	RES, CHIP 10 (1005)
R822	1-208-955-81	s	RES, CHIP 680K (1005)
R823	1-208-939-81	s	RES, CHIP 150K (1005)
R824	1-208-951-81	s	RES, CHIP 470K (1005)
R825	1-220-870-81	s	RES, CHIP 10 (1005)
R826	1-208-935-81	s	RES, CHIP 100K (1005)
R827	1-208-895-81	s	RES, CHIP 2.2K (1005)
R828	1-208-863-81	s	RES, CHIP 100 (1005)
R829	1-208-895-81	s	RES, CHIP 2.2K (1005)
R830	1-208-895-81	s	RES, CHIP 2.2K (1005)
R831	1-220-870-81	s	RES, CHIP 10 (1005)
R832	1-220-870-81	s	RES, CHIP 10 (1005)
R833	1-208-887-81	s	RES, CHIP 1.0K (1005)
R834	1-208-895-81	s	RES, CHIP 2.2K (1005)
R835	1-244-161-81	s	RES, CHIP 2.2 (1005)
R836	1-244-161-81	s	RES, CHIP 2.2 (1005)
R837	1-244-161-81	s	RES, CHIP 2.2 (1005)
R839	1-208-855-81	s	RES, CHIP 47 (1005)
R840	1-208-863-81	s	RES, CHIP 100 (1005)
R841	1-208-903-81	s	RES, CHIP 4.7K (1005)
R842	1-208-855-81	s	RES, CHIP 47 (1005)
R843	1-208-855-81	s	RES, CHIP 47 (1005)
R844	1-208-899-81	s	RES, CHIP 3.3K (1005)

(AT-167 BOARD suffix 12)

Ref. No. or Q'ty	Part No.	SP	Description
R845	1-208-919-81	s	RES, CHIP 22K (1005)
R846	1-208-863-81	s	RES, CHIP 100 (1005)
R847	1-208-895-81	s	RES, CHIP 2.2K (1005)
R848	1-208-911-81	s	RES, CHIP 10K (1005)
R851	1-208-919-81	s	RES, CHIP 22K (1005)
R852	1-208-915-81	s	RES, CHIP 15K (1005)
R853	1-208-911-81	s	RES, CHIP 10K (1005)
R854	1-208-863-81	s	RES, CHIP 100 (1005)
R855	1-208-919-81	s	RES, CHIP 22K (1005)
R856	1-208-947-81	s	RES, CHIP 330K (1005)
R857	1-208-855-81	s	RES, CHIP 47 (1005)
R858	1-208-903-81	s	RES, CHIP 4.7K (1005)
R859	1-208-855-81	s	RES, CHIP 47 (1005)
R861	1-208-863-81	s	RES, CHIP 100 (1005)
R862	1-208-863-81	s	RES, CHIP 100 (1005)
R863	1-208-899-81	s	RES, CHIP 3.3K (1005)
R864	1-208-911-81	s	RES, CHIP 10K (1005)
R865	1-208-863-81	s	RES, CHIP 100 (1005)
R866	1-208-911-81	s	RES, CHIP 10K (1005)
R867	1-208-863-81	s	RES, CHIP 100 (1005)
R868	1-208-911-81	s	RES, CHIP 10K (1005)
R869	1-208-863-81	s	RES, CHIP 100 (1005)
R870	1-208-903-81	s	RES, CHIP 4.7K (1005)
R871	1-208-907-81	s	RES, CHIP 6.8K (1005)
R872	1-208-887-81	s	RES, CHIP 1.0K (1005)
R879	1-208-903-81	s	RES, CHIP 4.7K (1005)
R880	1-208-863-81	s	RES, CHIP 100 (1005)
R883	1-208-863-81	s	RES, CHIP 100 (1005)
R885	1-208-863-81	s	RES, CHIP 100 (1005)
R887	1-208-863-81	s	RES, CHIP 100 (1005)
R888	1-208-863-81	s	RES, CHIP 100 (1005)
R889	1-208-863-81	s	RES, CHIP 100 (1005)
R890	1-208-863-81	s	RES, CHIP 100 (1005)
R891	1-208-863-81	s	RES, CHIP 100 (1005)
R893	1-208-863-81	s	RES, CHIP 100 (1005)
R894	1-208-863-81	s	RES, CHIP 100 (1005)
R897	1-208-863-81	s	RES, CHIP 100 (1005)
R900	1-208-903-81	s	RES, CHIP 4.7K (1005)
R902	1-208-903-81	s	RES, CHIP 4.7K (1005)
R903	1-208-911-81	s	RES, CHIP 10K (1005)
R904	1-208-911-81	s	RES, CHIP 10K (1005)
R905	1-208-911-81	s	RES, CHIP 10K (1005)
R906	1-208-895-81	s	RES, CHIP 2.2K (1005)
R907	1-208-895-81	s	RES, CHIP 2.2K (1005)
R908	1-208-923-81	s	RES, CHIP 33K (1005)
R909	1-208-895-81	s	RES, CHIP 2.2K (1005)
R910	1-220-870-81	s	RES, CHIP 10 (1005)
R911	1-208-895-81	s	RES, CHIP 2.2K (1005)
R912	1-208-927-81	s	RES, CHIP 47K (1005)
R913	1-208-927-81	s	RES, CHIP 47K (1005)
R914	1-208-887-81	s	RES, CHIP 1.0K (1005)
R915	1-220-870-81	s	RES, CHIP 10 (1005)
R916	1-220-870-81	s	RES, CHIP 10 (1005)
R917	1-220-870-81	s	RES, CHIP 10 (1005)
R918	1-208-903-81	s	RES, CHIP 4.7K (1005)
R919	1-208-911-81	s	RES, CHIP 10K (1005)
R920	1-208-911-81	s	RES, CHIP 10K (1005)
R921	1-208-903-81	s	RES, CHIP 4.7K (1005)
R922	1-208-935-81	s	RES, CHIP 100K (1005)

(AT-167 BOARD suffix 12)

Ref. No. or Q'ty	Part No.	SP	Description
R923	1-244-161-81	s	RES, CHIP 2.2 (1005)
R924	1-208-891-81	s	RES, CHIP 1.5K (1005)
R925	1-208-891-81	s	RES, CHIP 1.5K (1005)
R926	1-208-891-81	s	RES, CHIP 1.5K (1005)
R927	1-208-911-81	s	RES, CHIP 10K (1005)
R928	1-208-903-81	s	RES, CHIP 4.7K (1005)
R929	1-244-161-81	s	RES, CHIP 2.2 (1005)
R930	1-244-161-81	s	RES, CHIP 2.2 (1005)
R931	1-244-161-81	s	RES, CHIP 2.2 (1005)
R932	1-208-935-81	s	RES, CHIP 100K (1005)
R933	1-244-161-81	s	RES, CHIP 2.2 (1005)
R934	1-208-871-81	s	RES, CHIP 220 (1005)
R935	1-208-871-81	s	RES, CHIP 220 (1005)
R936	1-208-863-81	s	RES, CHIP 100 (1005)
R937	1-208-863-81	s	RES, CHIP 100 (1005)
R938	1-208-911-81	s	RES, CHIP 10K (1005)
R939	1-208-915-81	s	RES, CHIP 15K (1005)
R940	1-208-887-81	s	RES, CHIP 1.0K (1005)
R941	1-208-899-81	s	RES, CHIP 3.3K (1005)
R942	1-208-919-81	s	RES, CHIP 22K (1005)
R943	1-208-887-81	s	RES, CHIP 1.0K (1005)
R944	1-208-899-81	s	RES, CHIP 3.3K (1005)
R945	1-208-919-81	s	RES, CHIP 22K (1005)
R946	1-208-871-81	s	RES, CHIP 220 (1005)
R947	1-208-863-81	s	RES, CHIP 100 (1005)
R948	1-208-895-81	s	RES, CHIP 2.2K (1005)
R950	1-208-875-81	s	RES, CHIP 330 (1005)
R954	1-208-863-81	s	RES, CHIP 100 (1005)
R958	1-208-867-81	s	RES, CHIP 150 (1005)
R959	1-208-887-81	s	RES, CHIP 1.0K (1005)
R960	1-208-867-81	s	RES, CHIP 150 (1005)
R961	1-208-887-81	s	RES, CHIP 1.0K (1005)
R962	1-220-870-81	s	RES, CHIP 10 (1005)
R963	1-220-870-81	s	RES, CHIP 10 (1005)
R964	1-220-870-81	s	RES, CHIP 10 (1005)
R965	1-220-870-81	s	RES, CHIP 10 (1005)
R966	1-220-870-81	s	RES, CHIP 10 (1005)
R967	1-220-870-81	s	RES, CHIP 10 (1005)
R969	1-208-863-81	s	RES, CHIP 100 (1005)
R970	1-208-863-81	s	RES, CHIP 100 (1005)
R972	1-208-855-81	s	RES, CHIP 47 (1005)
R973	1-208-855-81	s	RES, CHIP 47 (1005)
RB101	1-233-810-21	s	RES, NETWORK 100K (3216)
RB102	1-233-810-21	s	RES, NETWORK 100K (3216)
RB103	1-233-810-21	s	RES, NETWORK 100K (3216)
RB104	1-233-810-21	s	RES, NETWORK 100K (3216)
RB105	1-233-810-21	s	RES, NETWORK 100K (3216)
RB106	1-233-810-21	s	RES, NETWORK 100K (3216)
RB107	1-233-810-21	s	RES, NETWORK 100K (3216)
RB108	1-233-810-21	s	RES, NETWORK 100K (3216)
RB109	1-233-810-21	s	RES, NETWORK 100K (3216)
RB110	1-233-810-21	s	RES, NETWORK 100K (3216)
RB111	1-233-810-21	s	RES, NETWORK 100K (3216)
RB112	1-233-810-21	s	RES, NETWORK 100K (3216)
RB113	1-233-810-21	s	RES, NETWORK 100K (3216)
RB114	1-233-810-21	s	RES, NETWORK 100K (3216)
RB115	1-233-810-21	s	RES, NETWORK 100K (3216)
RB116	1-233-810-21	s	RES, NETWORK 100K (3216)

(AT-167 BOARD suffix 12)

Ref. No. or Q'ty	Part No.	SP	Description
RB117	1-233-810-21	s	RES, NETWORK 100K (3216)
RB118	1-233-810-21	s	RES, NETWORK 100K (3216)
RB119	1-233-423-21	s	RES, CHIP NETWORK 47 (3216)
RB120	1-233-423-21	s	RES, CHIP NETWORK 47 (3216)
RB121	1-233-423-21	s	RES, CHIP NETWORK 47 (3216)
RB123	1-233-423-21	s	RES, CHIP NETWORK 47 (3216)
RB124	1-233-423-21	s	RES, CHIP NETWORK 47 (3216)
RB125	1-233-423-21	s	RES, CHIP NETWORK 47 (3216)
RB126	1-233-423-21	s	RES, CHIP NETWORK 47 (3216)
RB401	1-233-810-21	s	RES, NETWORK 100K (3216)
RB402	1-233-810-21	s	RES, NETWORK 100K (3216)
RB403	1-233-810-21	s	RES, NETWORK 100K (3216)
RB404	1-233-810-21	s	RES, NETWORK 100K (3216)
RB405	1-233-810-21	s	RES, NETWORK 100K (3216)
RB406	1-233-810-21	s	RES, NETWORK 100K (3216)
RB407	1-233-810-21	s	RES, NETWORK 100K (3216)
RB420	1-233-412-21	s	RES, CHIP NETWORK 1.0K (3216)
RB421	1-233-412-21	s	RES, CHIP NETWORK 1.0K (3216)
RB422	1-233-412-21	s	RES, CHIP NETWORK 1.0K (3216)
RB423	1-233-810-21	s	RES, NETWORK 100K (3216)
RB424	1-233-412-21	s	RES, CHIP NETWORK 1.0K (3216)
RB425	1-233-412-21	s	RES, CHIP NETWORK 1.0K (3216)
RB426	1-233-412-21	s	RES, CHIP NETWORK 1.0K (3216)
RB427	1-233-412-21	s	RES, CHIP NETWORK 1.0K (3216)
RB428	1-233-412-21	s	RES, CHIP NETWORK 1.0K (3216)
RB429	1-233-412-21	s	RES, CHIP NETWORK 1.0K (3216)
RB430	1-233-412-21	s	RES, CHIP NETWORK 1.0K (3216)
RB431	1-233-412-21	s	RES, CHIP NETWORK 1.0K (3216)
RB701	1-233-576-21	s	RES, CHIP NETWORK 100 (3216)
RB703	1-233-576-21	s	RES, CHIP NETWORK 100 (3216)
RB709	1-233-574-21	s	RES, CHIP NETWORK 10 (3216)
RB710	1-233-423-21	s	RES, CHIP NETWORK 47 (3216)
RB714	1-233-574-21	s	RES, CHIP NETWORK 10 (3216)
RB715	1-233-574-21	s	RES, CHIP NETWORK 10 (3216)
RB716	1-233-423-21	s	RES, CHIP NETWORK 47 (3216)
RB717	1-233-423-21	s	RES, CHIP NETWORK 47 (3216)
RV701	1-225-791-21	s	RES, ADJ, CERMET 5K
RV702	1-225-793-21	s	RES, ADJ, CERMET 20K
S101	1-771-709-41	s	SWITCH, SLIDE
S102	1-771-709-41	s	SWITCH, SLIDE
S103	1-771-709-41	s	SWITCH, SLIDE
S104	1-771-709-41	s	SWITCH, SLIDE
S401	1-762-118-21	s	SWITCH, TOGGLE
S402	1-762-120-21	s	SWITCH, TOGGLE
S403	1-572-658-21	s	SWITCH, ROTARY
S404	1-572-658-21	s	SWITCH, ROTARY
S405	1-572-658-21	s	SWITCH, ROTARY
S406	1-692-271-41	s	SWITCH, SLIDE
S407	1-692-271-41	s	SWITCH, SLIDE
S408	1-692-271-41	s	SWITCH, SLIDE
S409	1-692-271-41	s	SWITCH, SLIDE
S410	1-762-217-31	s	SWITCH, SLIDE
S411	1-570-711-33	s	SWITCH, SLIDE
S412	1-570-711-33	s	SWITCH, SLIDE
S413	1-570-711-33	s	SWITCH, SLIDE
S416	1-762-217-31	s	SWITCH, SLIDE
S418	1-762-217-31	s	SWITCH, SLIDE
S419	1-762-217-31	s	SWITCH, SLIDE

(AT-167 BOARD suffix 12)

Ref. No. or Q'ty	Part No.	SP	Description
S420	1-762-217-31	s	SWITCH, SLIDE
THP1	⚠ 1-533-817-21	s	THERMISTOR
THP2	⚠ 1-533-817-21	s	THERMISTOR
THP3	⚠ 1-804-458-21	s	THERMISTOR, POSITIVE
THP4	⚠ 1-804-458-21	s	THERMISTOR, POSITIVE
THP101	⚠ 1-803-353-21	s	THERMISTOR, POSITIVE
TP601	1-535-877-22	s	CHIP, CHECKER
TP701	1-535-877-22	s	CHIP, CHECKER
TP702	1-535-877-22	s	CHIP, CHECKER
TP703	1-535-877-22	s	CHIP, CHECKER
TP704	1-535-877-22	s	CHIP, CHECKER
TP705	1-535-877-22	s	CHIP, CHECKER
TP709	1-535-877-22	s	CHIP, CHECKER
TP711	1-535-877-22	s	CHIP, CHECKER
TP712	1-535-877-22	s	CHIP, CHECKER
TP713	1-535-877-22	s	CHIP, CHECKER
TP714	1-535-877-22	s	CHIP, CHECKER
X301	1-813-007-21	s	OSCILLATOR, CRYSTAL (SMD)
X302	1-795-177-21	s	OSCILLATOR, CRYSTAL
X701	1-813-212-11	s	OSCILLATOR, CRYSTAL
X702	1-795-671-12	s	OSCILLATOR, CRYSTAL (VCXO)3.3V
X703	1-795-670-12	s	OSCILLATOR, CRYSTAL (VCXO)3.3V

AT-167 BOARD (suffix 11)

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1129-299-A	s	MOUNTED CIRCUIT BOARD, AT-167
4pcs	7-682-947-01	s	SCREW +PSW 3X6
BT101	1-756-076-21	s	HOLDER, LITHIUM BATTERY
C1	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C2	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C3	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C4	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C5	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C6	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C7	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C8	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C9	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C10	1-127-573-11	s	CAPACITOR,CERAMIC 1MFB(2012)
C11	1-127-573-11	s	CAPACITOR,CERAMIC 1MFB(2012)
C12	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C13	1-126-391-11	s	CAPACITOR ELECT 47MF/6.3V(105)
C14	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C15	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C16	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C18	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C19	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C20	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C21	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C22	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C23	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C24	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C25	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C26	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C28	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C29	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C30	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C31	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C33	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C34	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C35	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C37	1-126-391-11	s	CAPACITOR ELECT 47MF/6.3V(105)
C38	1-126-391-11	s	CAPACITOR ELECT 47MF/6.3V(105)
C39	1-126-391-11	s	CAPACITOR ELECT 47MF/6.3V(105)
C41	1-126-391-11	s	CAPACITOR ELECT 47MF/6.3V(105)
C101	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C102	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C103	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C104	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C105	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C106	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C107	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C108	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C109	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C110	1-104-905-11	s	CAPACITOR DOUBLE LAYERS 0.22F
C111	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C112	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C113	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C115	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C117	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C118	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C119	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C120	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C121	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V

(AT-167 BOARD suffix 11)

Ref. No. or Q'ty	Part No.	SP	Description
C122	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C123	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C124	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C125	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C126	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C127	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C128	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C129	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C130	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C131	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C132	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C133	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C134	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C135	1-164-935-11	s	CAPACITOR,CHIP CERAMIC 470PF
C136	1-164-935-11	s	CAPACITOR,CHIP CERAMIC 470PF
C137	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C138	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C139	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C140	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C141	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C142	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C143	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C144	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C145	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C146	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C147	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C148	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C149	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C150	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C151	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C152	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C153	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C154	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C155	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C156	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C157	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C158	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C159	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C160	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C161	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C162	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C163	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C164	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C165	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C166	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C167	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C168	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C169	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C170	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C171	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C172	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C173	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C174	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C175	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C176	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C177	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C178	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C179	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C180	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216

(AT-167 BOARD suffix 11)

Ref. No. or Q'ty	Part No.	SP	Description
C181	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C182	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C183	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C184	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C185	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C186	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C187	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C188	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C189	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C190	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C191	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C192	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C193	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C194	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C195	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C301	1-164-862-11	s	CAPACITOR,CHIP CERAMIC 33PF/50
C302	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C303	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C304	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C305	1-164-862-11	s	CAPACITOR,CHIP CERAMIC 33PF/50
C306	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C307	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C308	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C309	1-126-391-11	s	CAPACITOR ELECT 47MF/6.3V(105)
C310	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C311	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C312	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C313	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C314	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C315	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C316	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C317	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C318	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C319	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C320	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C321	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C323	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C324	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C325	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C326	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C327	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C328	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C329	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C330	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C331	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C332	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C333	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C334	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C335	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C336	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C337	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C338	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C339	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C340	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C341	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C342	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C343	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C344	1-164-850-11	s	CAPACITOR,CHIP CERAMIC 10PF/50
C401	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V

(AT-167 BOARD suffix 11)

Ref. No. or Q'ty	Part No.	SP	Description
C402	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C403	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C404	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C407	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C408	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C409	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C410	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C413	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C414	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C415	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C416	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C417	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C418	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C419	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C601	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C602	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C605	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C606	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C607	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C608	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C609	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C610	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C611	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C612	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C613	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C614	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C615	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C616	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C617	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C618	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C619	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C620	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C621	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C622	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C623	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C624	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C625	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C626	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C627	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C628	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C629	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C630	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C631	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C632	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C701	1-126-391-11	s	CAPACITOR ELECT 47MF/6.3V(105)
C702	1-126-391-11	s	CAPACITOR ELECT 47MF/6.3V(105)
C703	1-164-866-11	s	CAPACITOR,CHIP CERAMIC 47PF/50
C704	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C705	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C706	1-164-850-11	s	CAPACITOR,CHIP CERAMIC 10PF/50
C708	1-164-858-11	s	CAPACITOR,CERAMIC 22PF/50V
C709	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C710	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C711	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C712	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C713	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C716	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C717	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C718	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216

(AT-167 BOARD suffix 11)

Ref. No. or Q'ty	Part No.	SP	Description
C719	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C720	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C721	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C722	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C723	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C724	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C725	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C726	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C727	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C728	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C729	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C730	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C731	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C732	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C733	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C734	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C735	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C736	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C738	1-126-391-11	s	CAPACITOR ELECT 47MF/6.3V(105)
C739	1-164-850-11	s	CAPACITOR,CHIP CERAMIC 10PF/50
C740	1-126-391-11	s	CAPACITOR ELECT 47MF/6.3V(105)
C741	1-164-882-11	s	CAPACITOR,CERAMIC 220PF/16V CH
C742	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C743	1-164-882-11	s	CAPACITOR,CERAMIC 220PF/16V CH
C744	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C745	1-125-891-11	s	CAPACITOR CERAMIC 0.47MF/10V
C746	1-126-391-11	s	CAPACITOR ELECT 47MF/6.3V(105)
C747	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C748	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C749	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C750	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C751	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C752	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C753	1-126-391-11	s	CAPACITOR ELECT 47MF/6.3V(105)
C754	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C755	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C756	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C757	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C758	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C759	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C760	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C761	1-164-878-11	s	CAPACITOR, CHIP CERAMIC 150PF
C762	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C763	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C764	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C765	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C766	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C767	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C768	1-127-956-11	s	CAPACITOR,CHIP FILM 0.1MF
C769	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C770	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C771	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C772	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C773	1-127-956-11	s	CAPACITOR,CHIP FILM 0.1MF
C774	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C775	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C776	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C777	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C778	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216

(AT-167 BOARD suffix 11)

Ref. No. or Q'ty	Part No.	SP	Description
C779	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C780	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C781	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C782	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C783	1-164-850-11	s	CAPACITOR,CHIP CERAMIC 10PF/50
C784	1-164-850-11	s	CAPACITOR,CHIP CERAMIC 10PF/50
C785	1-164-850-11	s	CAPACITOR,CHIP CERAMIC 10PF/50
C786	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C787	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C789	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C790	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C791	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C792	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C793	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C796	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C798	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C799	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C801	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C802	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C803	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C804	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C805	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C806	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C807	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C808	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C809	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C810	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C811	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C812	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C813	1-125-891-11	s	CAPACITOR CERAMIC 0.47MF/10V
C814	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C815	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C816	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C817	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C818	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C819	1-164-858-11	s	CAPACITOR,CERAMIC 22PF/50V
C820	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C821	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C822	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C823	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C827	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C829	1-164-878-11	s	CAPACITOR, CHIP CERAMIC 150PF
C830	1-126-391-11	s	CAPACITOR ELECT 47MF/6.3V(105)
C831	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C833	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C834	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C835	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C836	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C837	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C840	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C841	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C842	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C843	1-127-956-11	s	CAPACITOR,CHIP FILM 0.1MF
C844	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C845	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C846	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C847	1-127-956-11	s	CAPACITOR,CHIP FILM 0.1MF
C848	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C849	1-127-956-11	s	CAPACITOR,CHIP FILM 0.1MF

(AT-167 BOARD suffix 11)

Ref. No. or Q'ty	Part No.	SP	Description
C850	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C851	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C852	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C853	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C854	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C855	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C856	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C857	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C858	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C859	1-164-850-11	s	CAPACITOR,CHIP CERAMIC 10PF/50
C860	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C861	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C862	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C863	1-164-850-11	s	CAPACITOR,CHIP CERAMIC 10PF/50
C864	1-164-850-11	s	CAPACITOR,CHIP CERAMIC 10PF/50
C865	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C866	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C867	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C868	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C870	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C871	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C873	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C874	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C875	1-164-845-11	s	CAPACITOR,CERAMIC 5PF/16V(1005
C876	1-164-845-11	s	CAPACITOR,CERAMIC 5PF/16V(1005
CN101	1-785-553-11	o	CONNECTOR, BOARD TO BOARD 120P
CN102	1-764-094-21	o	PIN, CONNECTOR (PC BOARD) 9P
CN103	1-794-917-11	s	CONNECTOR, MEMORY STICK
CN104	1-793-093-11	o	CONNECTOR, BOARD TO BOARD 60P
CN301	1-580-057-11	s	PIN,CONNECTOR 4P
CN601	1-764-093-21	o	PIN, CONNECTOR (PC BOARD) 8P
D1	8-719-017-03	s	DIODE 02DZ4.7-TPH3
D2	8-719-017-03	s	DIODE 02DZ4.7-TPH3
D4	8-719-063-83	s	LED SML-510MWT86
D101	8-719-820-41	s	DIODE 1SS302
D102	8-719-070-20	s	DIODE RB706F-40
D103	8-719-820-41	s	DIODE 1SS302
D104	8-719-820-41	s	DIODE 1SS302
D105	8-719-820-41	s	DIODE 1SS302
D106	8-719-820-41	s	DIODE 1SS302
D107	8-719-820-41	s	DIODE 1SS302
D401	8-719-024-81	s	DIODE 1SS300-TE85L
D402	8-719-024-81	s	DIODE 1SS300-TE85L
D403	8-719-024-81	s	DIODE 1SS300-TE85L
D404	8-719-024-81	s	DIODE 1SS300-TE85L
D405	8-719-024-81	s	DIODE 1SS300-TE85L
D406	8-719-024-81	s	DIODE 1SS300-TE85L
D407	8-719-024-81	s	DIODE 1SS300-TE85L
D408	8-719-024-81	s	DIODE 1SS300-TE85L
D409	8-719-063-83	s	LED SML-510MWT86
D410	8-719-077-09	s	DIODE CL-196HR-CD-T
D411	8-719-027-84	s	LED CL-155UR/G-D
D412	8-719-027-84	s	LED CL-155UR/G-D
D416	8-719-024-81	s	DIODE 1SS300-TE85L
D417	8-719-024-81	s	DIODE 1SS300-TE85L
D418	8-719-024-81	s	DIODE 1SS300-TE85L
D419	8-719-024-81	s	DIODE 1SS300-TE85L
D420	8-719-024-81	s	DIODE 1SS300-TE85L

(AT-167 BOARD suffix 11)

Ref. No. or Q'ty	Part No.	SP	Description
D421	8-719-024-81	s	DIODE 1SS300-TE85L
D422	8-719-024-81	s	DIODE 1SS300-TE85L
D423	8-719-024-81	s	DIODE 1SS300-TE85L
D425	8-719-024-81	s	DIODE 1SS300-TE85L
D427	8-719-024-81	s	DIODE 1SS300-TE85L
D428	8-719-024-81	s	DIODE 1SS300-TE85L
D429	8-719-024-81	s	DIODE 1SS300-TE85L
D701	8-719-820-41	s	DIODE 1SS302
D702	8-719-024-81	s	DIODE 1SS300-TE85L
D703	8-719-820-41	s	DIODE 1SS302
D704	8-719-820-41	s	DIODE 1SS302
D705	8-719-820-41	s	DIODE 1SS302
D706	8-719-820-41	s	DIODE 1SS302
D707	8-719-820-41	s	DIODE 1SS302
D708	8-719-820-41	s	DIODE 1SS302
D709	8-719-070-20	s	DIODE RB706F-40
E1	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
E2	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
E4	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
FB701	1-469-094-21	s	FERRITE, EMI (SMD)
FB702	1-469-094-21	s	FERRITE, EMI (SMD)
FB703	1-469-094-21	s	FERRITE, EMI (SMD)
FB704	1-469-094-21	s	FERRITE, EMI (SMD)
IC1	6-704-976-01	s	IC ADR381ART-REEL7
IC2	6-700-655-01	s	IC LT1963ES8#TR
IC3	8-759-327-01	s	IC NJM062V-TE2
IC4	8-759-327-01	s	IC NJM062V-TE2
IC6	8-759-338-95	s	IC NJM2903V (TE2)
IC101	8-759-678-06	s	IC CAT24WC02WI-TE13
IC102	8-759-833-99	s	IC MC74HC4052ADTR2
IC103	8-759-363-26	s	IC RN5VD28AA-TL
IC104	8-759-669-71	s	IC PCF8591T/2
IC105	8-759-648-04	s	IC RTC4574JE-TP
IC106	8-759-669-44	s	IC SN74LVC74APWR-12
IC107	6-703-461-11	s	IC CY2309ZC-1HT
IC108	6-706-488-01	s	IC TC7SH14FU(T5RSOYJF)
IC110	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC111	8-759-669-42	s	IC SN74LVC138APWR-12
IC112	8-759-669-42	s	IC SN74LVC138APWR-12
IC113	8-759-669-42	s	IC SN74LVC138APWR-12
IC114	8-759-669-68	s	IC SN74CBT3253PWR-12
IC116	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC118	8-759-557-85	s	IC NC7SZ32P5X
IC119	6-705-721-01	s	IC MT48LC8M16A2P-75-Y15WTR
IC120	6-705-721-01	s	IC MT48LC8M16A2P-75-Y15WTR
IC121	8-759-669-42	s	IC SN74LVC138APWR-12
IC122	6-704-988-01	s	IC FM18L08-70-STR
IC123	6-704-988-01	s	IC FM18L08-70-STR
IC124	8-759-599-93	s	IC NC7SZ08P5
IC125	8-759-669-44	s	IC SN74LVC74APWR-12
IC126	8-759-557-84	s	IC NC7SZ04P5X
IC127	8-759-557-84	s	IC NC7SZ04P5X
IC128	8-759-599-93	s	IC NC7SZ08P5
IC129	8-759-584-32	s	IC MB86189PFV-G-BND-ER
IC130	6-706-484-01	s	IC TC7SH04FU(T5RSOYJF)
IC131	8-759-327-01	s	IC NJM062V-TE2
IC132	6-706-484-01	s	IC TC7SH04FU(T5RSOYJF)
IC133	6-706-488-01	s	IC TC7SH14FU(T5RSOYJF)

(AT-167 BOARD suffix 11)

Ref. No. or Q'ty	Part No.	SP	Description
IC134	6-706-488-01	s	IC TC7SH14FU(T5RSOYJF)
IC135	6-706-483-01	s	IC TC7SH02FU(T5RSOYJF)
IC136	6-706-488-01	s	IC TC7SH14FU(T5RSOYJF)
IC137	8-759-472-43	s	IC 74VHC245MTCX
IC138	8-759-472-43	s	IC 74VHC245MTCX
IC139	8-759-472-43	s	IC 74VHC245MTCX
IC140	8-759-472-43	s	IC 74VHC245MTCX
IC141	8-759-679-55	s	IC SN74LVC08APWR
IC142	8-759-679-55	s	IC SN74LVC08APWR
IC143	8-759-679-55	s	IC SN74LVC08APWR
IC144	8-759-327-01	s	IC NJM062V-TE2
IC145	8-759-669-66	s	IC TLC272CPWR
IC146	8-759-599-93	s	IC NC7SZ08P5
IC147	8-759-599-93	s	IC NC7SZ08P5
IC148	8-759-599-93	s	IC NC7SZ08P5
IC149	8-759-679-55	s	IC SN74LVC08APWR
IC150	8-759-599-93	s	IC NC7SZ08P5
IC151	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC301	8-759-594-17	o	IC CXD9093R
IC302	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC303	6-706-484-01	s	IC TC7SH04FU(T5RSOYJF)
IC304	8-759-594-17	o	IC CXD9093R
IC305	6-702-691-01	s	IC BCM5221A4KPT
IC306	8-759-531-92	s	IC TC7WH04FU(TE12R)
IC307	8-759-471-91	s	IC 74VHC04MTCX
IC308	8-759-092-81	s	IC SN75158PS
IC401	8-752-392-03	s	IC CXD1095BR
IC402	6-706-357-01	s	IC LTC1664IGN#TR
IC403	8-759-662-38	s	IC 74VHCT08AMTCX
IC406	8-759-531-92	s	IC TC7WH04FU(TE12R)
IC407	8-752-392-03	s	IC CXD1095BR
IC408	8-759-472-43	s	IC 74VHC245MTCX
IC409	8-759-531-92	s	IC TC7WH04FU(TE12R)
IC410	8-759-471-96	s	IC 74VHC08MTCX
IC411	8-759-471-96	s	IC 74VHC08MTCX
IC602	8-759-363-26	s	IC RN5VD28AA-TL
IC607	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC701	8-759-561-46	s	IC AD8014ART-REEL7
IC702	8-759-980-44	s	IC TL712CPS
IC703	8-759-980-44	s	IC TL712CPS
IC704	8-759-980-44	s	IC TL712CPS
IC705	8-759-344-12	s	IC GS4981CTAE3
IC706	8-759-669-41	s	IC SN74LVC125APWR-12
IC707	8-759-662-38	s	IC 74VHCT08AMTCX
IC708	8-759-485-24	s	IC MC74HC4046ADT (R2)
IC709	8-759-184-64	s	IC TC4W66FU
IC710	8-759-564-49	s	IC TC7W53FU-TE12R
IC711	8-759-564-49	s	IC TC7W53FU-TE12R
IC712	8-759-675-47	s	IC SN74LVC04APWR
IC713	8-759-675-47	s	IC SN74LVC04APWR
IC715	8-759-675-47	s	IC SN74LVC04APWR
IC717	6-700-804-01	s	IC SN74LVC574APWR
IC718	8-759-564-49	s	IC TC7W53FU-TE12R
IC719	8-759-344-12	s	IC GS4981CTAE3
IC720	8-759-980-44	s	IC TL712CPS
IC722	8-759-485-24	s	IC MC74HC4046ADT (R2)
IC723	8-759-564-49	s	IC TC7W53FU-TE12R
IC724	8-759-564-49	s	IC TC7W53FU-TE12R
IC726	6-700-804-01	s	IC SN74LVC574APWR

(AT-167 BOARD suffix 11)

Ref. No. or Q'ty	Part No.	SP	Description
IC727	8-759-471-91	s	IC 74VHC04MTCX
IC728	8-759-561-46	s	IC AD8014ART-REEL7
IC729	8-759-669-41	s	IC SN74LVC125APWR-12
IC730	8-759-675-47	s	IC SN74LVC04APWR
IC732	8-759-669-66	s	IC TLC272CPWR
IC733	8-759-669-66	s	IC TLC272CPWR
IC734	8-759-669-66	s	IC TLC272CPWR
IC735	8-759-669-66	s	IC TLC272CPWR
IC736	8-759-669-66	s	IC TLC272CPWR
IC737	8-759-669-66	s	IC TLC272CPWR
IC738	8-759-669-66	s	IC TLC272CPWR
IC739	6-706-484-01	s	IC TC7SH04FU(T5RSOYJF)
IC740	8-759-669-41	s	IC SN74LVC125APWR-12
IC741	8-759-663-35	s	IC 74VHC4053MTCX
IC742	8-759-663-35	s	IC 74VHC4053MTCX
IC743	8-759-523-04	s	IC TC74HC4538AFT
IC744	6-706-476-01	s	IC TC7SET04FU(T5RSOJF)
IC745	6-706-476-01	s	IC TC7SET04FU(T5RSOJF)
IC746	6-706-489-01	s	IC TC7SH32FU(T5RSOYJF)
IC747	6-706-478-01	s	IC TC7SET08FU(T5RSOJF)
IC748	6-706-478-01	s	IC TC7SET08FU(T5RSOJF)
IC749	8-759-523-04	s	IC TC74HC4538AFT
IC750	8-759-669-41	s	IC SN74LVC125APWR-12
IC751	6-706-484-01	s	IC TC7SH04FU(T5RSOYJF)
IC752	6-706-489-01	s	IC TC7SH32FU(T5RSOYJF)
IC753	6-706-484-01	s	IC TC7SH04FU(T5RSOYJF)
IC755	6-706-484-01	s	IC TC7SH04FU(T5RSOYJF)
IC756	8-759-531-92	s	IC TC7WH04FU(TE12R)
IC757	6-706-478-01	s	IC TC7SET08FU(T5RSOJF)
IC758	6-706-478-01	s	IC TC7SET08FU(T5RSOJF)
IC759	8-759-592-42	s	IC TC7SZ00FU(TE85R)
IC760	8-759-592-42	s	IC TC7SZ00FU(TE85R)
IC761	8-759-592-42	s	IC TC7SZ00FU(TE85R)
IC762	8-759-592-42	s	IC TC7SZ00FU(TE85R)
L1	1-414-398-11	s	INDUCTOR (SMD) 10UH
L101	1-414-398-11	s	INDUCTOR (SMD) 10UH
L102	1-414-398-11	s	INDUCTOR (SMD) 10UH
L103	1-414-398-11	s	INDUCTOR (SMD) 10UH
L104	1-414-398-11	s	INDUCTOR (SMD) 10UH
L105	1-414-398-11	s	INDUCTOR (SMD) 10UH
L106	1-414-398-11	s	INDUCTOR (SMD) 10UH
L107	1-414-398-11	s	INDUCTOR (SMD) 10UH
L108	1-414-398-11	s	INDUCTOR (SMD) 10UH
L109	1-414-398-11	s	INDUCTOR (SMD) 10UH
L110	1-414-398-11	s	INDUCTOR (SMD) 10UH
L111	1-414-398-11	s	INDUCTOR (SMD) 10UH
L113	1-414-398-11	s	INDUCTOR (SMD) 10UH
L114	1-414-398-11	s	INDUCTOR (SMD) 10UH
L301	1-414-398-11	s	INDUCTOR (SMD) 10UH
L302	1-414-398-11	s	INDUCTOR (SMD) 10UH
L303	1-414-398-11	s	INDUCTOR (SMD) 10UH
L304	1-414-398-11	s	INDUCTOR (SMD) 10UH
L305	1-414-398-11	s	INDUCTOR (SMD) 10UH
L401	1-414-398-11	s	INDUCTOR (SMD) 10UH
L601	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L602	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L701	1-414-398-11	s	INDUCTOR (SMD) 10UH
L702	1-414-398-11	s	INDUCTOR (SMD) 10UH
L703	1-412-056-11	s	INDUCTOR 4.7UH (3225)

(AT-167 BOARD suffix 11)

Ref. No. or Q'ty	Part No.	SP	Description
L704	1-414-398-11	s	INDUCTOR (SMD) 10UH
L705	1-414-398-11	s	INDUCTOR (SMD) 10UH
L706	1-414-398-11	s	INDUCTOR (SMD) 10UH
L707	1-414-398-11	s	INDUCTOR (SMD) 10UH
L708	1-414-398-11	s	INDUCTOR (SMD) 10UH
L709	1-414-398-11	s	INDUCTOR (SMD) 10UH
L710	1-414-398-11	s	INDUCTOR (SMD) 10UH
L711	1-414-398-11	s	INDUCTOR (SMD) 10UH
L712	1-414-398-11	s	INDUCTOR (SMD) 10UH
L713	1-414-398-11	s	INDUCTOR (SMD) 10UH
L714	1-414-398-11	s	INDUCTOR (SMD) 10UH
L715	1-414-398-11	s	INDUCTOR (SMD) 10UH
L716	1-414-398-11	s	INDUCTOR (SMD) 10UH
L717	1-414-398-11	s	INDUCTOR (SMD) 10UH
L718	1-414-398-11	s	INDUCTOR (SMD) 10UH
L719	1-414-398-11	s	INDUCTOR (SMD) 10UH
L720	1-414-398-11	s	INDUCTOR (SMD) 10UH
L724	1-414-398-11	s	INDUCTOR (SMD) 10UH
L725	1-414-398-11	s	INDUCTOR (SMD) 10UH
L726	1-414-398-11	s	INDUCTOR (SMD) 10UH
L727	1-414-398-11	s	INDUCTOR (SMD) 10UH
L728	1-414-398-11	s	INDUCTOR (SMD) 10UH
L729	1-414-398-11	s	INDUCTOR (SMD) 10UH
L730	1-414-398-11	s	INDUCTOR (SMD) 10UH
L733	1-414-398-11	s	INDUCTOR (SMD) 10UH
L734	1-414-398-11	s	INDUCTOR (SMD) 10UH
L735	1-414-398-11	s	INDUCTOR (SMD) 10UH
L736	1-414-398-11	s	INDUCTOR (SMD) 10UH
L737	1-414-398-11	s	INDUCTOR (SMD) 10UH
L738	1-414-398-11	s	INDUCTOR (SMD) 10UH
L739	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L740	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L741	1-414-398-11	s	INDUCTOR (SMD) 10UH
L742	1-414-398-11	s	INDUCTOR (SMD) 10UH
L743	1-414-398-11	s	INDUCTOR (SMD) 10UH
PH1	8-749-011-37	s	PHOTO COUPLER TLP181 (BC-TPR)
PH301	8-749-014-35	s	IC HCPL-0630-500
PH302	8-749-014-35	s	IC HCPL-0630-500
Q1	8-729-032-74	s	TRANSISTOR 2SA1615-Z-K
Q2	8-729-927-99	s	TRANSISTOR 2SC4617R
Q3	8-729-230-27	s	TRANSISTOR 2SA1213Y-TE12L
Q4	8-729-807-51	s	TRANSISTOR 2SD1623-S
Q5	8-729-047-32	s	TRANSISTOR SI4425DY-T1
Q6	8-729-927-99	s	TRANSISTOR 2SC4617R
Q101	8-729-927-99	s	TRANSISTOR 2SC4617R
Q102	8-729-230-27	s	TRANSISTOR 2SA1213Y-TE12L
Q301	8-729-927-99	s	TRANSISTOR 2SC4617R
Q401	8-729-927-99	s	TRANSISTOR 2SC4617R
Q402	8-729-927-99	s	TRANSISTOR 2SC4617R
Q403	8-729-927-99	s	TRANSISTOR 2SC4617R
Q404	8-729-927-99	s	TRANSISTOR 2SC4617R
Q405	8-729-927-99	s	TRANSISTOR 2SC4617R
Q406	8-729-927-99	s	TRANSISTOR 2SC4617R
Q407	8-729-927-99	s	TRANSISTOR 2SC4617R
Q408	8-729-928-19	s	TRANSISTOR 2SA1774R
Q409	8-729-928-19	s	TRANSISTOR 2SA1774R
Q410	8-729-928-19	s	TRANSISTOR 2SA1774R
Q411	8-729-928-19	s	TRANSISTOR 2SA1774R

(AT-167 BOARD suffix 11)

Ref. No. or Q'ty	Part No.	SP	Description
Q412	8-729-927-99	s	TRANSISTOR 2SC4617R
Q413	8-729-927-99	s	TRANSISTOR 2SC4617R
Q414	8-729-928-19	s	TRANSISTOR 2SA1774R
Q415	8-729-927-99	s	TRANSISTOR 2SC4617R
Q416	8-729-928-19	s	TRANSISTOR 2SA1774R
Q417	8-729-928-19	s	TRANSISTOR 2SA1774R
Q418	8-729-927-99	s	TRANSISTOR 2SC4617R
Q419	8-729-928-19	s	TRANSISTOR 2SA1774R
Q701	8-729-927-99	s	TRANSISTOR 2SC4617R
Q702	8-729-927-99	s	TRANSISTOR 2SC4617R
Q703	8-729-928-19	s	TRANSISTOR 2SA1774R
Q704	8-729-927-99	s	TRANSISTOR 2SC4617R
Q705	8-729-122-63	s	TRANSISTOR 2SA1226-E4
Q706	8-729-928-19	s	TRANSISTOR 2SA1774R
Q707	8-729-927-99	s	TRANSISTOR 2SC4617R
Q708	8-729-122-63	s	TRANSISTOR 2SA1226-E4
Q709	8-729-928-19	s	TRANSISTOR 2SA1774R
Q710	8-729-928-19	s	TRANSISTOR 2SA1774R
R1	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R2	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R3	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R4	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R5	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R6	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R7	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R8	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R9	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R10	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R11	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R12	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R13	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R14	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R15	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R16	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R17	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R18	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R19	1-208-703-11	s	RESISTOR,CHIP 6.8K 1/16W(1005)
R20	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R22	1-208-931-11	s	RESISTOR, CHIP 68K (1005)
R23	1-208-931-11	s	RESISTOR, CHIP 68K (1005)
R33	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R34	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R35	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R36	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R41	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R43	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R44	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R48	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R49	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R50	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R51	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R101	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R102	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R103	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R104	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R105	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R106	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R107	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)

(AT-167 BOARD suffix 11)

Ref. No. or Q'ty	Part No.	SP	Description
R108	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R109	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R110	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R111	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R112	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R113	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R115	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R116	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R117	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R118	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R119	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R120	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R121	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R122	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R123	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R124	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R125	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R128	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R129	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R130	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R131	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R132	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R133	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R134	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R135	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R136	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R137	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R139	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R140	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R142	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R144	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R147	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R148	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R150	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R151	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R152	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R153	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R154	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R155	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R156	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R157	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R158	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R159	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R160	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R161	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R162	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R163	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R164	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R165	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R166	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R167	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R168	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R169	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R170	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R171	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R172	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R173	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R174	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R175	1-208-911-11	s	RESISTOR, CHIP 10K (1005)

(AT-167 BOARD suffix 11)

Ref. No. or Q'ty	Part No.	SP	Description
R176	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R177	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R178	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R179	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R180	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R181	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R182	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R183	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R184	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R185	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R186	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R187	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R188	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R189	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R190	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R191	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R192	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R193	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R194	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R195	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R196	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R197	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R198	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R199	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R200	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R201	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R202	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R203	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R204	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R205	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R206	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R207	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R209	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R210	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R211	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R212	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R213	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R214	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R215	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R216	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R217	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R218	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R219	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R220	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R221	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R222	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R223	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R224	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R225	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R227	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R228	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R229	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R230	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R231	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R232	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R233	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R234	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R235	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R236	1-208-935-11	s	RESISTOR, CHIP 100K (1005)

(AT-167 BOARD suffix 11)

Ref. No. or Q'ty	Part No.	SP	Description
R237	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R240	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R241	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R242	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R243	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R245	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R246	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R247	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R301	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R302	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R303	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R304	1-208-703-11	s	RESISTOR,CHIP 6.8K 1/16W(1005)
R305	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R306	1-208-703-11	s	RESISTOR,CHIP 6.8K 1/16W(1005)
R307	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R308	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R309	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R310	1-208-647-11	s	RESISTOR CHIP 33 1/16W (1005)
R311	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R312	1-208-703-11	s	RESISTOR,CHIP 6.8K 1/16W(1005)
R313	1-208-703-11	s	RESISTOR,CHIP 6.8K 1/16W(1005)
R314	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R315	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R316	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R317	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R318	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R319	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R320	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R321	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R322	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R323	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R324	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R325	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R326	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R327	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R328	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R329	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R330	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R331	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R332	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R333	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R334	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R335	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R336	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R337	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R338	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R339	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R340	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R341	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R342	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R343	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R344	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R345	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R346	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R347	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R348	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R349	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R350	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R351	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)

(AT-167 BOARD suffix 11)

Ref. No. or Q'ty	Part No.	SP	Description
R352	1-208-647-11	s	RESISTOR CHIP 33 1/16W (1005)
R353	1-208-647-11	s	RESISTOR CHIP 33 1/16W (1005)
R354	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R355	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R356	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R357	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R358	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R359	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R360	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R361	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R362	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005
R363	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R364	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R401	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R402	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R403	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R404	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R405	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R406	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R407	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R408	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R409	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R410	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R411	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R412	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R413	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R414	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R415	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R416	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R417	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R418	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R419	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R420	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R421	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R422	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R423	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R424	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R425	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R426	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R427	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R430	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R431	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R432	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R433	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R434	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R435	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R436	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R437	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R438	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R439	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R440	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R441	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R442	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R445	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R446	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R447	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R448	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R449	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R450	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)

(AT-167 BOARD suffix 11)

Ref. No. or Q'ty	Part No.	SP	Description
R451	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R452	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R453	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R454	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R455	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R456	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R457	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R458	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R459	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R460	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R461	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R462	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R463	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R465	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R467	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R468	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R469	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R470	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R471	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R472	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R473	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R474	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R476	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R477	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R478	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R479	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R480	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R481	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R482	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R483	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R484	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R485	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R486	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R487	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R488	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R489	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R490	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R492	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R493	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R494	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R495	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R496	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R497	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R498	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R499	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R500	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R501	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R502	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R503	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R504	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R505	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R506	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R507	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R508	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R509	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R510	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R511	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R512	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R513	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)

(AT-167 BOARD suffix 11)

Ref. No. or Q'ty	Part No.	SP	Description
R514	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R515	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R516	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R517	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R518	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R519	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R520	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R521	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R522	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R601	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R602	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R603	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R604	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R605	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R606	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R607	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R608	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R609	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R610	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R611	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R614	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R615	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R617	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R618	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R619	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R620	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R621	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R622	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R623	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R624	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R625	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R626	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R627	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R628	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R629	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R630	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R631	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R633	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R700	1-208-679-11	s	RESISTOR CHIP 680 1/16W (1005)
R701	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R702	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R703	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R704	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R705	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R706	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R707	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005
R709	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R710	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R711	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R712	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R713	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R714	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R715	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R716	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R717	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R718	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R719	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R720	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R721	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)

(AT-167 BOARD suffix 11)

Ref. No. or Q'ty	Part No.	SP	Description
R722	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R723	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R724	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R725	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R726	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R727	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R728	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R729	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R730	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R731	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R732	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R733	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R734	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R735	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R736	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R737	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R738	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R739	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R740	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R741	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R742	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R743	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R744	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R745	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R746	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R747	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R748	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R749	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R750	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R751	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R752	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R753	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R754	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R755	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R756	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R757	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R758	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R759	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R760	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R761	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R762	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R763	1-208-947-11	s	RESISTOR CHIP 330K 1/16W(1005)
R764	1-208-955-11	s	RESISTOR CHIP 680K
R765	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R766	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R767	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R768	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R769	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R770	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R771	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R772	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R773	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R774	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R775	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R776	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R777	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R778	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R779	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R780	1-208-935-11	s	RESISTOR, CHIP 100K (1005)

(AT-167 BOARD suffix 11)

Ref. No. or Q'ty	Part No.	SP	Description
R781	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R782	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R783	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R784	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R785	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R786	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R787	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R788	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R789	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R790	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R791	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R792	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R793	1-208-955-11	s	RESISTOR CHIP 680K
R794	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R795	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R796	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R797	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R798	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R799	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R800	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R801	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R802	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R803	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R804	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R805	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R806	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R807	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R808	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R809	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R810	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R811	1-244-161-11	s	RESISTOR, CHIP 2.2(1005)
R812	1-244-161-11	s	RESISTOR, CHIP 2.2(1005)
R813	1-244-161-11	s	RESISTOR, CHIP 2.2(1005)
R814	1-244-161-11	s	RESISTOR, CHIP 2.2(1005)
R815	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R816	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R817	1-208-703-11	s	RESISTOR,CHIP 6.8K 1/16W(1005)
R818	1-244-161-11	s	RESISTOR, CHIP 2.2(1005)
R819	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R820	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R821	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R822	1-208-955-11	s	RESISTOR CHIP 680K
R823	1-208-939-11	s	RESISTOR, CHIP 150K (1005)
R824	1-218-985-11	s	RESISTOR CHIP 470K 1/16W(1005)
R825	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R826	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R827	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R828	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R829	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R830	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R831	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R832	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R833	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R834	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R835	1-244-161-11	s	RESISTOR, CHIP 2.2(1005)
R836	1-244-161-11	s	RESISTOR, CHIP 2.2(1005)
R837	1-244-161-11	s	RESISTOR, CHIP 2.2(1005)
R839	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R840	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)

(AT-167 BOARD suffix 11)

Ref. No. or Q'ty	Part No.	SP	Description
R841	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R842	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R843	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R844	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R845	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R846	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R847	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R848	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R851	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R852	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R853	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R854	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R855	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R856	1-208-947-11	s	RESISTOR CHIP 330K 1/16W(1005)
R857	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R858	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R859	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R861	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R862	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R863	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R864	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R865	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R866	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R867	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R868	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R869	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R870	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R871	1-208-703-11	s	RESISTOR,CHIP 6.8K 1/16W(1005)
R872	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R879	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R880	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R883	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R885	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R887	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R888	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R889	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R890	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R891	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R893	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R894	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R897	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R900	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R902	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R903	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R904	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R905	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R906	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R907	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R908	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R909	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R910	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R911	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R912	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R913	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R914	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R915	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R916	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R917	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R918	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)

(AT-167 BOARD suffix 11)

Ref. No. or Q'ty	Part No.	SP	Description
R919	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R920	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R921	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R922	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R923	1-244-161-11	s	RESISTOR, CHIP 2.2(1005)
R924	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005
R925	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005
R926	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005
R927	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R928	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R929	1-244-161-11	s	RESISTOR, CHIP 2.2(1005)
R930	1-244-161-11	s	RESISTOR, CHIP 2.2(1005)
R931	1-244-161-11	s	RESISTOR, CHIP 2.2(1005)
R932	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R933	1-244-161-11	s	RESISTOR, CHIP 2.2(1005)
R934	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R935	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R936	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R937	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R938	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R939	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R940	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R941	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R942	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R943	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R944	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R945	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R946	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R947	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R948	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R950	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R954	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R958	1-208-663-11	s	RESISTOR CHIP 150 1/16W (1005)
R959	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R960	1-208-663-11	s	RESISTOR CHIP 150 1/16W (1005)
R961	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R962	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R963	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R964	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R965	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R966	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R967	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R969	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R970	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R972	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R973	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
RB101	1-233-810-21	s	RES, NETWORK 100K (3216)
RB102	1-233-810-21	s	RES, NETWORK 100K (3216)
RB103	1-233-810-21	s	RES, NETWORK 100K (3216)
RB104	1-233-810-21	s	RES, NETWORK 100K (3216)
RB105	1-233-810-21	s	RES, NETWORK 100K (3216)
RB106	1-233-810-21	s	RES, NETWORK 100K (3216)
RB107	1-233-810-21	s	RES, NETWORK 100K (3216)
RB108	1-233-810-21	s	RES, NETWORK 100K (3216)
RB109	1-233-810-21	s	RES, NETWORK 100K (3216)
RB110	1-233-810-21	s	RES, NETWORK 100K (3216)
RB111	1-233-810-21	s	RES, NETWORK 100K (3216)
RB112	1-233-810-21	s	RES, NETWORK 100K (3216)

(AT-167 BOARD suffix 11)

Ref. No. or Q'ty	Part No.	SP	Description
RB113	1-233-810-21	s	RES, NETWORK 100K (3216)
RB114	1-233-810-21	s	RES, NETWORK 100K (3216)
RB115	1-233-810-21	s	RES, NETWORK 100K (3216)
RB116	1-233-810-21	s	RES, NETWORK 100K (3216)
RB117	1-233-810-21	s	RES, NETWORK 100K (3216)
RB118	1-233-810-21	s	RES, NETWORK 100K (3216)
RB119	1-239-409-11	s	RESISTOR NETWORK 47 (3216)
RB120	1-239-409-11	s	RESISTOR NETWORK 47 (3216)
RB121	1-239-409-11	s	RESISTOR NETWORK 47 (3216)
RB123	1-239-409-11	s	RESISTOR NETWORK 47 (3216)
RB124	1-239-409-11	s	RESISTOR NETWORK 47 (3216)
RB125	1-239-409-11	s	RESISTOR NETWORK 47 (3216)
RB126	1-239-409-11	s	RESISTOR NETWORK 47 (3216)
RB401	1-233-810-21	s	RES, NETWORK 100K (3216)
RB402	1-233-810-21	s	RES, NETWORK 100K (3216)
RB403	1-233-810-21	s	RES, NETWORK 100K (3216)
RB404	1-233-810-21	s	RES, NETWORK 100K (3216)
RB405	1-233-810-21	s	RES, NETWORK 100K (3216)
RB406	1-233-810-21	s	RES, NETWORK 100K (3216)
RB407	1-233-810-21	s	RES, NETWORK 100K (3216)
RB420	1-233-412-11	s	RESISTOR,CHIP NETWORK 1K
RB421	1-233-412-11	s	RESISTOR,CHIP NETWORK 1K
RB422	1-233-412-11	s	RESISTOR,CHIP NETWORK 1K
RB423	1-233-810-21	s	RES, NETWORK 100K (3216)
RB424	1-233-412-11	s	RESISTOR,CHIP NETWORK 1K
RB425	1-233-412-11	s	RESISTOR,CHIP NETWORK 1K
RB426	1-233-412-11	s	RESISTOR,CHIP NETWORK 1K
RB427	1-233-412-11	s	RESISTOR,CHIP NETWORK 1K
RB428	1-233-412-11	s	RESISTOR,CHIP NETWORK 1K
RB429	1-233-412-11	s	RESISTOR,CHIP NETWORK 1K
RB430	1-233-412-11	s	RESISTOR,CHIP NETWORK 1K
RB431	1-233-412-11	s	RESISTOR,CHIP NETWORK 1K
RB701	1-233-576-11	s	RESISTOR,CHIP NETWORK 100
RB703	1-233-576-11	s	RESISTOR,CHIP NETWORK 100
RB709	1-233-574-11	s	RESISTOR,CHIP NETWORK 10
RB710	1-239-409-11	s	RESISTOR NETWORK 47 (3216)
RB714	1-233-574-11	s	RESISTOR,CHIP NETWORK 10
RB715	1-233-574-11	s	RESISTOR,CHIP NETWORK 10
RB716	1-239-409-11	s	RESISTOR NETWORK 47 (3216)
RB717	1-239-409-11	s	RESISTOR NETWORK 47 (3216)
RV701	1-225-791-21	s	RES, ADJ, CERMET 5K
RV702	1-225-793-11	s	RES, ADJ, CERMET 20K
S101	1-771-709-31	s	SWITCH, SLIDE
S102	1-771-709-31	s	SWITCH, SLIDE
S103	1-771-709-31	s	SWITCH, SLIDE
S104	1-771-709-31	s	SWITCH, SLIDE
S401	1-762-118-21	s	SWITCH, TOGGLE
S402	1-762-120-11	s	SWITCH, TOGGLE
S403	1-572-658-21	s	SWITCH,ROTARY
S404	1-572-658-21	s	SWITCH,ROTARY
S405	1-572-658-21	s	SWITCH,ROTARY
S406	1-692-271-31	s	SWITCH, SLIDE
S407	1-692-271-31	s	SWITCH, SLIDE
S408	1-692-271-31	s	SWITCH, SLIDE
S409	1-692-271-31	s	SWITCH, SLIDE
S410	1-762-217-31	s	SWITCH, SLIDE
S411	1-570-711-11	s	SWITCH,SLIDE
S412	1-570-711-11	s	SWITCH,SLIDE

(AT-167 BOARD suffix 11)

Ref. No. or Q'ty	Part No.	SP	Description
S413	1-570-711-11	s	SWITCH,SLIDE
S416	1-762-217-31	s	SWITCH, SLIDE
S418	1-762-217-31	s	SWITCH, SLIDE
S419	1-762-217-31	s	SWITCH, SLIDE
S420	1-762-217-31	s	SWITCH, SLIDE
THP1	⚠ 1-533-817-21	s	THERMISTOR
THP2	⚠ 1-533-817-21	s	THERMISTOR
THP3	⚠ 1-804-458-21	s	THERMISTOR, POSITIVE
THP4	⚠ 1-804-458-21	s	THERMISTOR, POSITIVE
THP101	⚠ 1-803-353-21	s	THERMISTOR, POSITIVE
TP601	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
TP701	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
TP702	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
TP703	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
TP704	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
TP705	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
TP709	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
TP711	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
TP712	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
TP713	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
TP714	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
X301	1-813-007-21	s	OSCILLATOR, CRYSTAL (SMD)
X302	1-795-177-21	s	OSCILLATOR, CRYSTAL
X701	1-813-212-11	s	OSCILLATOR, CRYSTAL
X702	1-795-671-12	s	OSCILLATOR, CRYSTAL
X703	1-795-670-12	s	OSCILLATOR, CRYSTAL

AU-302 BOARD (suffix 14, 31)

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1129-307-A	s	MOUNTED CIRCUIT BOARD, AU-302
C1	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3	1-128-416-21	s	CAP, CHIP ELECT 100MF
C4	1-112-298-91	s	CAP, CERAMIC 1MF B (1608)
C5	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C6	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C7	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C8	1-115-153-21	s	CAP, ELECT 4.7MF
C9	1-115-153-21	s	CAP, ELECT 4.7MF
C10	1-162-968-91	s	CAP,CHIP CERAMIC 4700PF B 1608
C11	1-165-176-91	s	CAP,CERAMIC 47000PF B 1608
C12	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C13	1-112-298-91	s	CAP, CERAMIC 1MF B (1608)
C14	1-112-298-91	s	CAP, CERAMIC 1MF B (1608)
C15	1-100-505-91	s	CAP, CERAMIC 0.1MF C (1005)
C16	1-100-505-91	s	CAP, CERAMIC 0.1MF C (1005)
C17	1-100-505-91	s	CAP, CERAMIC 0.1MF C (1005)
C18	1-100-505-91	s	CAP, CERAMIC 0.1MF C (1005)
C20	1-164-939-81	s	CAP, CHIPCERAMIC 2200PF B 1005
C21	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C22	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C23	1-112-298-91	s	CAP, CERAMIC 1MF B (1608)
C24	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C25	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C32	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
CN1	1-766-198-51	s	CONNECTOR, FPC 26P
CN2	1-764-080-21	o	PIN, CONNECTOR (PC BOARD) 8P
D1	6-501-358-01	s	DIODE CL-197HG5-CD-T
D2	6-501-358-01	s	DIODE CL-197HG5-CD-T
D3	8-719-077-09	s	DIODE CL-196HR-CD-T
D4	8-719-077-09	s	DIODE CL-196HR-CD-T
D5	8-719-077-09	s	DIODE CL-196HR-CD-T
D6	8-719-077-09	s	DIODE CL-196HR-CD-T
D9	8-719-077-09	s	DIODE CL-196HR-CD-T
D10	8-719-077-09	s	DIODE CL-196HR-CD-T
D11	6-501-358-01	s	DIODE CL-197HG5-CD-T
D12	6-501-358-01	s	DIODE CL-197HG5-CD-T
D15	6-501-358-01	s	DIODE CL-197HG5-CD-T
D16	6-501-358-01	s	DIODE CL-197HG5-CD-T
D17	6-500-008-01	s	DIODE CL-196TLY-CD-T
D18	6-500-008-01	s	DIODE CL-196TLY-CD-T
D21	6-500-008-01	s	DIODE CL-196TLY-CD-T
D22	6-500-008-01	s	DIODE CL-196TLY-CD-T
D23	8-719-989-01	s	DIODE DA221-TL
D24	8-719-989-01	s	DIODE DA221-TL
FB1	1-414-445-21	s	FERRITE, EMI (SMD) (1608)
IC1	8-759-422-21	s	IC NJM4580V(TE2)
JC1	1-218-990-81	s	CONDUCTOR, CHIP (1005)
L1	1-414-404-41	s	INDUCTOR (SMD) 100.0UH
L2	1-414-404-41	s	INDUCTOR (SMD) 100.0UH
L3	1-414-404-41	s	INDUCTOR (SMD) 100.0UH
L4	1-414-404-41	s	INDUCTOR (SMD) 100.0UH
L5	1-414-404-41	s	INDUCTOR (SMD) 100.0UH
L6	1-414-404-41	s	INDUCTOR (SMD) 100.0UH

(AU-302 BOARD suffix 14, 31)

Ref. No. or Q'ty	Part No.	SP	Description
L7	1-414-404-41	s	INDUCTOR (SMD) 100.0UH
Q1	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
R1	1-208-863-81	s	RES, CHIP 100 (1005)
R2	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4	1-208-863-81	s	RES, CHIP 100 (1005)
R5	1-208-887-81	s	RES, CHIP 1.0K (1005)
R6	1-208-863-81	s	RES, CHIP 100 (1005)
R7	1-208-887-81	s	RES, CHIP 1.0K (1005)
R8	1-208-887-81	s	RES, CHIP 1.0K (1005)
R10	1-208-863-81	s	RES, CHIP 100 (1005)
R11	1-208-911-81	s	RES, CHIP 10K (1005)
R12	1-208-919-81	s	RES, CHIP 22K (1005)
R13	1-208-867-81	s	RES, CHIP 150 (1005)
R15	1-208-919-81	s	RES, CHIP 22K (1005)
R16	1-208-867-81	s	RES, CHIP 150 (1005)
R17	1-208-903-81	s	RES, CHIP 4.7K (1005)
R18	1-208-935-81	s	RES, CHIP 100K (1005)
R19	1-208-935-81	s	RES, CHIP 100K (1005)
R20	1-218-851-91	s	RES, CHIP 1.5K (1608)
R21	1-218-851-91	s	RES, CHIP 1.5K (1608)
R22	1-208-911-81	s	RES, CHIP 10K (1005)
R25	1-208-895-81	s	RES, CHIP 2.2K (1005)
R26	1-208-943-81	s	RES, CHIP 220K (1005)
R27	1-208-919-81	s	RES, CHIP 22K (1005)
R28	1-208-895-81	s	RES, CHIP 2.2K (1005)
R29	1-208-943-81	s	RES, CHIP 220K (1005)
R30	1-208-943-81	s	RES, CHIP 220K (1005)
R31	1-208-863-81	s	RES, CHIP 100 (1005)
R32	1-208-935-81	s	RES, CHIP 100K (1005)
R33	1-208-943-81	s	RES, CHIP 220K (1005)
R34	1-208-943-81	s	RES, CHIP 220K (1005)
R42	1-208-863-81	s	RES, CHIP 100 (1005)
R43	1-208-863-81	s	RES, CHIP 100 (1005)
R44	1-208-863-81	s	RES, CHIP 100 (1005)
RV1	1-238-255-21	s	RES, VAR, CARBON 10K
S1	1-762-122-11	s	SWITCH, TOGGLE
S2	1-762-217-31	s	SWITCH, SLIDE
S3	1-570-711-33	s	SWITCH, SLIDE
S4	1-762-217-31	s	SWITCH, SLIDE
S5	1-570-711-33	s	SWITCH, SLIDE

AU-302 BOARD (suffix 13)

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1129-307-A	s	MOUNTED CIRCUIT BOARD, AU-302
C1	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C2	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C5	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C6	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C7	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C8	1-115-153-21	s	CAP, ELECT 4.7MF
C9	1-115-153-21	s	CAP, ELECT 4.7MF
C10	1-162-968-91	s	CAP,CHIP CERAMIC 4700PF B 1608
C11	1-165-176-91	s	CAP,CERAMIC 47000PF B 1608
C12	1-164-260-91	s	CAP,CHIP CERAMIC 47PF RH(1608)
C13	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C14	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C15	1-100-505-91	s	CAP, CERAMIC 0.1MF C (1005)
C16	1-100-505-91	s	CAP, CERAMIC 0.1MF C (1005)
C17	1-100-505-91	s	CAP, CERAMIC 0.1MF C (1005)
C18	1-100-505-91	s	CAP, CERAMIC 0.1MF C (1005)
C21	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C22	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C23	1-107-823-91	s	CAP, CERAMIC 470000PF B (2012)
C24	1-107-826-91	s	CAP, CHIP CERAMIC 100000PF B
C25	1-128-416-21	s	CAP, CHIP ELECT 100MF
C26	1-107-823-91	s	CAP, CERAMIC 470000PF B (2012)
CN1	1-766-198-51	s	CONNECTOR, FPC 26P
CN2	1-764-080-21	o	PIN, CONNECTOR (PC BOARD) 8P
D1	6-501-358-01	s	DIODE CL-197HG5-CD-T
D2	6-501-358-01	s	DIODE CL-197HG5-CD-T
D3	8-719-077-09	s	DIODE CL-196HR-CD-T
D4	8-719-077-09	s	DIODE CL-196HR-CD-T
D5	8-719-077-09	s	DIODE CL-196HR-CD-T
D6	8-719-077-09	s	DIODE CL-196HR-CD-T
D9	8-719-077-09	s	DIODE CL-196HR-CD-T
D10	8-719-077-09	s	DIODE CL-196HR-CD-T
D11	6-501-358-01	s	DIODE CL-197HG5-CD-T
D12	6-501-358-01	s	DIODE CL-197HG5-CD-T
D15	6-501-358-01	s	DIODE CL-197HG5-CD-T
D16	6-501-358-01	s	DIODE CL-197HG5-CD-T
D17	8-719-064-41	s	DIODE CL-191Y-CD-T
D18	8-719-064-41	s	DIODE CL-191Y-CD-T
D19	8-719-064-41	s	DIODE CL-191Y-CD-T
D20	8-719-064-41	s	DIODE CL-191Y-CD-T
D21	8-719-064-41	s	DIODE CL-191Y-CD-T
D22	8-719-064-41	s	DIODE CL-191Y-CD-T
D23	8-719-989-01	s	DIODE DA221-TL
D24	8-719-989-01	s	DIODE DA221-TL
FB1	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
IC1	8-759-278-58	s	IC NJM4558V-TE2
IC2	8-759-168-19	s	IC TA78L09F-TE12L
JC1	1-218-990-81	s	CONDUCTOR, CHIP (1005)
L1	1-414-404-41	s	INDUCTOR (SMD) 100.0UH
L2	1-414-404-41	s	INDUCTOR (SMD) 100.0UH
L3	1-414-404-41	s	INDUCTOR (SMD) 100.0UH
L4	1-414-404-41	s	INDUCTOR (SMD) 100.0UH
L5	1-414-404-41	s	INDUCTOR (SMD) 100.0UH
L6	1-414-404-41	s	INDUCTOR (SMD) 100.0UH

(AU-302 BOARD suffix 13)

Ref. No. or Q'ty	Part No.	SP	Description
L7	1-414-404-41	s	INDUCTOR (SMD) 100.0UH
R1	1-208-863-81	s	RES, CHIP 100 (1005)
R2	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4	1-208-863-81	s	RES, CHIP 100 (1005)
R5	1-208-887-81	s	RES, CHIP 1.0K (1005)
R6	1-208-863-81	s	RES, CHIP 100 (1005)
R7	1-208-887-81	s	RES, CHIP 1.0K (1005)
R8	1-208-887-81	s	RES, CHIP 1.0K (1005)
R10	1-208-863-81	s	RES, CHIP 100 (1005)
R11	1-208-911-81	s	RES, CHIP 10K (1005)
R12	1-208-919-81	s	RES, CHIP 22K (1005)
R13	1-208-855-81	s	RES, CHIP 47 (1005)
R14	1-208-855-81	s	RES, CHIP 47 (1005)
R15	1-208-919-81	s	RES, CHIP 22K (1005)
R16	1-208-855-81	s	RES, CHIP 47 (1005)
R18	1-208-935-81	s	RES, CHIP 100K (1005)
R19	1-208-935-81	s	RES, CHIP 100K (1005)
R20	1-208-887-81	s	RES, CHIP 1.0K (1005)
R21	1-208-887-81	s	RES, CHIP 1.0K (1005)
R22	1-208-911-81	s	RES, CHIP 10K (1005)
R23	1-208-887-81	s	RES, CHIP 1.0K (1005)
R24	1-208-887-81	s	RES, CHIP 1.0K (1005)
R25	1-220-878-81	s	RES, CHIP 22 (1005)
R26	1-208-943-81	s	RES, CHIP 220K (1005)
R27	1-208-919-81	s	RES, CHIP 22K (1005)
R28	1-208-895-81	s	RES, CHIP 2.2K (1005)
R29	1-208-895-81	s	RES, CHIP 2.2K (1005)
R30	1-208-943-81	s	RES, CHIP 220K (1005)
R31	1-208-863-81	s	RES, CHIP 100 (1005)
R32	1-208-935-81	s	RES, CHIP 100K (1005)
R33	1-208-943-81	s	RES, CHIP 220K (1005)
R34	1-208-943-81	s	RES, CHIP 220K (1005)
RV1	1-238-255-21	s	RES, VAR, CARBON 10K
S1	1-762-122-11	s	SWITCH, TOGGLE
S2	1-762-217-31	s	SWITCH, SLIDE
S3	1-570-711-33	s	SWITCH, SLIDE
S4	1-762-217-31	s	SWITCH, SLIDE
S5	1-570-711-33	s	SWITCH, SLIDE

AU-302 BOARD (suffix 12)

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1129-307-A	s	MOUNTED CIRCUIT BOARD, AU-302
C1	1-100-505-91	s	CAP, CERAMIC 0.1MF C (1005)
C2	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C3	1-128-416-21	s	CAP, CHIP ELECT 100MF
C4	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C5	1-100-505-91	s	CAP, CERAMIC 0.1MF C (1005)
C6	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C7	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C8	1-115-153-21	s	CAP, ELECT 4.7MF
C9	1-115-153-21	s	CAP, ELECT 4.7MF
C10	1-164-227-91	s	CAP,CERAMIC 22000PF B 1608
C11	1-127-715-91	s	CAP,CHIP CERAMIC 0.22MF B 1608
C12	1-164-260-91	s	CAP,CHIP CERAMIC 47PF RH(1608)
C13	1-107-823-91	s	CAP, CERAMIC 470000PF B (2012)
C14	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C15	1-100-505-91	s	CAP, CERAMIC 0.1MF C (1005)
C16	1-100-505-91	s	CAP, CERAMIC 0.1MF C (1005)
C17	1-100-505-91	s	CAP, CERAMIC 0.1MF C (1005)
C18	1-100-505-91	s	CAP, CERAMIC 0.1MF C (1005)
C21	1-100-505-91	s	CAP, CERAMIC 0.1MF C (1005)
CN1	1-766-198-51	s	CONNECTOR, FPC 26P
CN2	1-764-080-21	o	PIN, CONNECTOR (PC BOARD) 8P
D1	6-501-358-01	s	DIODE CL-197HG5-CD-T
D2	6-501-358-01	s	DIODE CL-197HG5-CD-T
D3	8-719-077-09	s	DIODE CL-196HR-CD-T
D4	8-719-077-09	s	DIODE CL-196HR-CD-T
D5	8-719-077-09	s	DIODE CL-196HR-CD-T
D6	8-719-077-09	s	DIODE CL-196HR-CD-T
D9	8-719-077-09	s	DIODE CL-196HR-CD-T
D10	8-719-077-09	s	DIODE CL-196HR-CD-T
D11	6-501-358-01	s	DIODE CL-197HG5-CD-T
D12	6-501-358-01	s	DIODE CL-197HG5-CD-T
D15	6-501-358-01	s	DIODE CL-197HG5-CD-T
D16	6-501-358-01	s	DIODE CL-197HG5-CD-T
D17	8-719-064-41	s	DIODE CL-191Y-CD-T
D18	8-719-064-41	s	DIODE CL-191Y-CD-T
D19	8-719-064-41	s	DIODE CL-191Y-CD-T
D20	8-719-064-41	s	DIODE CL-191Y-CD-T
D21	8-719-064-41	s	DIODE CL-191Y-CD-T
D22	8-719-064-41	s	DIODE CL-191Y-CD-T
D23	8-719-024-81	s	DIODE 1SS300-TE85L
IC1	8-759-278-58	s	IC NJM4558V-TE2
JC1	1-218-990-81	s	CONDUCTOR, CHIP (1005)
L1	1-414-404-41	s	INDUCTOR (SMD) 100.0UH
L2	1-414-404-41	s	INDUCTOR (SMD) 100.0UH
L3	1-414-404-41	s	INDUCTOR (SMD) 100.0UH
L4	1-414-404-41	s	INDUCTOR (SMD) 100.0UH
L5	1-414-404-41	s	INDUCTOR (SMD) 100.0UH
L6	1-414-404-41	s	INDUCTOR (SMD) 100.0UH
L7	1-414-404-41	s	INDUCTOR (SMD) 100.0UH
R1	1-208-863-81	s	RES, CHIP 100 (1005)
R2	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4	1-208-863-81	s	RES, CHIP 100 (1005)
R5	1-208-887-81	s	RES, CHIP 1.0K (1005)
R6	1-208-863-81	s	RES, CHIP 100 (1005)

(AU-302 BOARD suffix 12)

Ref. No. or Q'ty	Part No.	SP	Description
R7	1-208-887-81	s	RES, CHIP 1.0K (1005)
R8	1-208-887-81	s	RES, CHIP 1.0K (1005)
R10	1-208-863-81	s	RES, CHIP 100 (1005)
R11	1-208-911-81	s	RES, CHIP 10K (1005)
R12	1-208-919-81	s	RES, CHIP 22K (1005)
R13	1-208-855-81	s	RES, CHIP 47 (1005)
R14	1-208-855-81	s	RES, CHIP 47 (1005)
R15	1-208-919-81	s	RES, CHIP 22K (1005)
R16	1-208-855-81	s	RES, CHIP 47 (1005)
R17	1-208-855-81	s	RES, CHIP 47 (1005)
R18	1-208-935-81	s	RES, CHIP 100K (1005)
R19	1-208-935-81	s	RES, CHIP 100K (1005)
R20	1-208-895-81	s	RES, CHIP 2.2K (1005)
R21	1-208-891-81	s	RES, CHIP 1.5K (1005)
R22	1-208-911-81	s	RES, CHIP 10K (1005)
R23	1-208-895-81	s	RES, CHIP 2.2K (1005)
R24	1-208-891-81	s	RES, CHIP 1.5K (1005)
R25	1-220-878-81	s	RES, CHIP 22 (1005)
R26	1-208-943-81	s	RES, CHIP 220K (1005)
R27	1-208-919-81	s	RES, CHIP 22K (1005)
R28	1-208-895-81	s	RES, CHIP 2.2K (1005)
R29	1-208-895-81	s	RES, CHIP 2.2K (1005)
R30	1-208-943-81	s	RES, CHIP 220K (1005)
R31	1-208-863-81	s	RES, CHIP 100 (1005)
R32	1-208-935-81	s	RES, CHIP 100K (1005)
R33	1-208-943-81	s	RES, CHIP 220K (1005)
R34	1-208-943-81	s	RES, CHIP 220K (1005)
RV1	1-238-255-21	s	RES, VAR, CARBON 10K
S1	1-762-122-11	s	SWITCH, TOGGLE
S2	1-762-217-31	s	SWITCH, SLIDE
S3	1-570-711-33	s	SWITCH, SLIDE
S4	1-762-217-31	s	SWITCH, SLIDE
S5	1-570-711-33	s	SWITCH, SLIDE

AU-302 BOARD (suffix 11)

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1129-307-A	s	MOUNTED CIRCUIT BOARD, AU-302
C1	1-100-505-11	s	CAPACITOR,CERAMIC 0.1MF B 1005
C2	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C3	1-128-416-11	s	CAPACITOR ELECT 100MF/16V(105C
C4	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C5	1-100-505-11	s	CAPACITOR,CERAMIC 0.1MF B 1005
C6	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C7	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C8	1-115-153-11	s	CAPACITOR,ELECT 4.7MF/16V(BP)
C9	1-115-153-11	s	CAPACITOR,ELECT 4.7MF/16V(BP)
C10	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C11	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C12	1-164-315-11	s	CAPACITOR,CERAMIC 470PF/50V CH
C13	1-107-823-11	s	CAPACITOR,CERAMIC 0.47MF/16V
C14	1-100-505-11	s	CAPACITOR,CERAMIC 0.1MF B 1005
C15	1-100-505-11	s	CAPACITOR,CERAMIC 0.1MF B 1005
C16	1-100-505-11	s	CAPACITOR,CERAMIC 0.1MF B 1005
C17	1-100-505-11	s	CAPACITOR,CERAMIC 0.1MF B 1005
C18	1-100-505-11	s	CAPACITOR,CERAMIC 0.1MF B 1005
C21	1-100-505-11	s	CAPACITOR,CERAMIC 0.1MF B 1005
CN1	1-766-198-51	s	CONNECTOR, FPC 26P
CN2	1-764-080-21	o	PIN, CONNECTOR (PC BOARD) 8P
D1	6-500-276-01	s	DIODE CL-191G1-C-T
D2	6-500-276-01	s	DIODE CL-191G1-C-T
D3	8-719-077-09	s	DIODE CL-196HR-CD-T
D4	8-719-077-09	s	DIODE CL-196HR-CD-T
D5	8-719-077-09	s	DIODE CL-196HR-CD-T
D6	8-719-077-09	s	DIODE CL-196HR-CD-T
D9	8-719-077-09	s	DIODE CL-196HR-CD-T
D10	8-719-077-09	s	DIODE CL-196HR-CD-T
D11	6-500-276-01	s	DIODE CL-191G1-C-T
D12	6-500-276-01	s	DIODE CL-191G1-C-T
D15	6-500-276-01	s	DIODE CL-191G1-C-T
D16	6-500-276-01	s	DIODE CL-191G1-C-T
D17	8-719-064-41	s	DIODE CL-191Y-CD-T
D18	8-719-064-41	s	DIODE CL-191Y-CD-T
D19	8-719-064-41	s	DIODE CL-191Y-CD-T
D20	8-719-064-41	s	DIODE CL-191Y-CD-T
D21	8-719-064-41	s	DIODE CL-191Y-CD-T
D22	8-719-064-41	s	DIODE CL-191Y-CD-T
D23	8-719-024-81	s	DIODE 1SS300-TE85L
IC1	8-759-278-58	s	IC NJM4558V (TE2)
JC1	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
L1	1-414-404-11	s	INDUCTOR (SMD) 100UH
L2	1-414-404-11	s	INDUCTOR (SMD) 100UH
L3	1-414-404-11	s	INDUCTOR (SMD) 100UH
L4	1-414-404-11	s	INDUCTOR (SMD) 100UH
L5	1-414-404-11	s	INDUCTOR (SMD) 100UH
L6	1-414-404-11	s	INDUCTOR (SMD) 100UH
L7	1-414-404-11	s	INDUCTOR (SMD) 100UH
R1	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R2	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R4	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R5	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R6	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)

(AU-302 BOARD suffix 11)

Ref. No. or Q'ty	Part No.	SP	Description
R7	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R8	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R10	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R11	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R12	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R13	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R14	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R15	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R16	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R17	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R18	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R19	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R20	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R21	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005
R22	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R23	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R24	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005
R25	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R26	1-208-943-11	s	RESISTOR CHIP 220K
R27	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R28	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R29	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R30	1-208-943-11	s	RESISTOR CHIP 220K
R31	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R32	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R33	1-208-943-11	s	RESISTOR CHIP 220K
R34	1-208-943-11	s	RESISTOR CHIP 220K
RV1	1-238-255-21	s	RESISTOR,VAR,CARBON 10K
S1	1-762-122-11	s	SWITCH, TOGGLE
S2	1-762-217-31	s	SWITCH, SLIDE
S3	1-570-711-11	s	SWITCH,SLIDE
S4	1-762-217-31	s	SWITCH, SLIDE
S5	1-570-711-11	s	SWITCH,SLIDE

AU-303G BOARD (suffix 22, 31)

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1161-086-A	s	MOUNTED CIRCUIT BOARD, AU-303G
C3	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C5	1-128-416-21	s	CAP, CHIP ELECT 100MF
C6	1-112-298-91	s	CAP, CERAMIC 1MF B (1608)
C7	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C8	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C9	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C10	1-115-153-21	s	CAP, ELECT 4.7MF
C11	1-115-153-21	s	CAP, ELECT 4.7MF
C12	1-162-968-91	s	CAP,CHIP CERAMIC 4700PF B 1608
C13	1-165-176-91	s	CAP,CERAMIC 47000PF B 1608
C14	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C15	1-112-298-91	s	CAP, CERAMIC 1MF B (1608)
C16	1-112-298-91	s	CAP, CERAMIC 1MF B (1608)
C17	1-164-939-81	s	CAP, CHIPCERAMIC 2200PF B 1005
C19	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C20	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C21	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C22	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C23	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C24	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C25	1-100-505-91	s	CAP, CERAMIC 0.1MF C (1005)
C26	1-100-505-91	s	CAP, CERAMIC 0.1MF C (1005)
C27	1-100-505-91	s	CAP, CERAMIC 0.1MF C (1005)
C28	1-100-505-91	s	CAP, CERAMIC 0.1MF C (1005)
C29	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C30	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C31	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C32	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C33	1-112-298-91	s	CAP, CERAMIC 1MF B (1608)
C34	1-100-505-91	s	CAP, CERAMIC 0.1MF C (1005)
C35	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
CN1	1-778-534-31	s	CONNECTOR, FFC/FPC(ZIF) ST 45P
CN2	1-764-080-21	o	PIN, CONNECTOR (PC BOARD) 8P
CN3	1-766-767-51	s	CONNECTOR, FPC 12P
CN4	1-764-441-51	s	CONNECTOR, FPC 30P
D2	6-501-358-01	s	DIODE CL-197HG5-CD-T
D3	8-719-077-09	s	DIODE CL-196HR-CD-T
D4	6-501-358-01	s	DIODE CL-197HG5-CD-T
D5	6-501-358-01	s	DIODE CL-197HG5-CD-T
D6	8-719-077-09	s	DIODE CL-196HR-CD-T
D7	8-719-077-09	s	DIODE CL-196HR-CD-T
D8	6-500-008-01	s	DIODE CL-196TLY-CD-T
D9	6-500-008-01	s	DIODE CL-196TLY-CD-T
D10	6-501-358-01	s	DIODE CL-197HG5-CD-T
D11	6-501-358-01	s	DIODE CL-197HG5-CD-T
D12	8-719-077-09	s	DIODE CL-196HR-CD-T
D13	8-719-077-09	s	DIODE CL-196HR-CD-T
D14	6-500-008-01	s	DIODE CL-196TLY-CD-T
D15	6-500-008-01	s	DIODE CL-196TLY-CD-T
D17	6-501-358-01	s	DIODE CL-197HG5-CD-T
D18	6-501-358-01	s	DIODE CL-197HG5-CD-T
D19	8-719-077-09	s	DIODE CL-196HR-CD-T
D20	8-719-077-09	s	DIODE CL-196HR-CD-T
D21	8-719-989-01	s	DIODE DA221-TL
D22	8-719-989-01	s	DIODE DA221-TL

(AU-303G BOARD suffix 22, 31)

Ref. No. or Q'ty	Part No.	SP	Description
FB1	1-414-445-21	s	FERRITE, EMI (SMD) (1608)
IC1	8-759-422-21	s	IC NJM4580V(TE2)
JC3	1-218-990-81	s	CONDUCTOR, CHIP (1005)
JC4	1-218-990-81	s	CONDUCTOR, CHIP (1005)
JC6	1-218-990-81	s	CONDUCTOR, CHIP (1005)
JC7	1-218-990-81	s	CONDUCTOR, CHIP (1005)
L1	1-414-404-41	s	INDUCTOR (SMD) 100.0UH
L2	1-414-404-41	s	INDUCTOR (SMD) 100.0UH
L3	1-414-404-41	s	INDUCTOR (SMD) 100.0UH
L4	1-414-404-41	s	INDUCTOR (SMD) 100.0UH
L5	1-414-404-41	s	INDUCTOR (SMD) 100.0UH
L6	1-414-404-41	s	INDUCTOR (SMD) 100.0UH
L7	1-414-404-41	s	INDUCTOR (SMD) 100.0UH
Q1	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
R1	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4	1-208-887-81	s	RES, CHIP 1.0K (1005)
R6	1-208-871-81	s	RES, CHIP 220 (1005)
R7	1-208-911-81	s	RES, CHIP 10K (1005)
R8	1-208-919-81	s	RES, CHIP 22K (1005)
R9	1-208-875-81	s	RES, CHIP 330 (1005)
R10	1-208-919-81	s	RES, CHIP 22K (1005)
R11	1-208-867-81	s	RES, CHIP 150 (1005)
R12	1-208-855-81	s	RES, CHIP 47 (1005)
R13	1-208-863-81	s	RES, CHIP 100 (1005)
R14	1-208-867-81	s	RES, CHIP 150 (1005)
R15	1-208-863-81	s	RES, CHIP 100 (1005)
R16	1-208-855-81	s	RES, CHIP 47 (1005)
R17	1-208-935-81	s	RES, CHIP 100K (1005)
R18	1-208-935-81	s	RES, CHIP 100K (1005)
R19	1-218-851-91	s	RES, CHIP 1.5K (1608)
R20	1-218-851-91	s	RES, CHIP 1.5K (1608)
R21	1-208-911-81	s	RES, CHIP 10K (1005)
R22	1-208-863-81	s	RES, CHIP 100 (1005)
R23	1-208-903-81	s	RES, CHIP 4.7K (1005)
R24	1-208-895-81	s	RES, CHIP 2.2K (1005)
R25	1-208-895-81	s	RES, CHIP 2.2K (1005)
R26	1-208-943-81	s	RES, CHIP 220K (1005)
R27	1-208-919-81	s	RES, CHIP 22K (1005)
R28	1-208-943-81	s	RES, CHIP 220K (1005)
R29	1-208-943-81	s	RES, CHIP 220K (1005)
R30	1-208-863-81	s	RES, CHIP 100 (1005)
R31	1-208-935-81	s	RES, CHIP 100K (1005)
R32	1-208-943-81	s	RES, CHIP 220K (1005)
R33	1-208-943-81	s	RES, CHIP 220K (1005)
R34	1-208-863-81	s	RES, CHIP 100 (1005)
R35	1-208-863-81	s	RES, CHIP 100 (1005)
R36	1-208-863-81	s	RES, CHIP 100 (1005)
RV1	1-238-255-21	s	RES, VAR, CARBON 10K
S2	1-762-122-11	s	SWITCH, TOGGLE
S3	1-762-123-11	s	SWITCH, TOGGLE
S4	1-762-123-11	s	SWITCH, TOGGLE
S5	1-786-333-21	s	SWITCH, SLIDE (SMD)
S6	1-571-275-41	s	SWITCH, SLIDE

AU-303G BOARD (suffix 21)

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1161-086-A	s	MOUNTED CIRCUIT BOARD, AU-303G
C3	1-100-505-91	s	CAP, CERAMIC 0.1MF C (1005)
C4	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C5	1-128-416-21	s	CAP, CHIP ELECT 100MF
C6	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C7	1-100-505-91	s	CAP, CERAMIC 0.1MF C (1005)
C8	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C9	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C10	1-115-153-21	s	CAP, ELECT 4.7MF
C11	1-115-153-21	s	CAP, ELECT 4.7MF
C12	1-164-227-91	s	CAP,CERAMIC 22000PF B 1608
C13	1-127-715-91	s	CAP,CHIP CERAMIC 0.22MF B 1608
C14	1-164-260-91	s	CAP,CHIP CERAMIC 47PF RH(1608)
C15	1-107-823-91	s	CAP, CERAMIC 470000PF B (2012)
C16	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C21	1-100-505-91	s	CAP, CERAMIC 0.1MF C (1005)
C22	1-100-505-91	s	CAP, CERAMIC 0.1MF C (1005)
C23	1-100-505-91	s	CAP, CERAMIC 0.1MF C (1005)
C24	1-100-505-91	s	CAP, CERAMIC 0.1MF C (1005)
C25	1-100-505-91	s	CAP, CERAMIC 0.1MF C (1005)
C26	1-100-505-91	s	CAP, CERAMIC 0.1MF C (1005)
C27	1-100-505-91	s	CAP, CERAMIC 0.1MF C (1005)
C28	1-100-505-91	s	CAP, CERAMIC 0.1MF C (1005)
C29	1-100-505-91	s	CAP, CERAMIC 0.1MF C (1005)
C30	1-100-505-91	s	CAP, CERAMIC 0.1MF C (1005)
CN1	1-778-534-31	s	CONNECTOR, FFC/FPC(ZIF) ST 45P
CN2	1-764-080-21	o	PIN, CONNECTOR (PC BOARD) 8P
CN3	1-766-767-51	s	CONNECTOR, FPC 12P
CN4	1-764-441-51	s	CONNECTOR, FPC 30P
D1	8-719-064-41	s	DIODE CL-191Y-CD-T
D2	6-501-358-01	s	DIODE CL-197HG5-CD-T
D3	8-719-077-09	s	DIODE CL-196HR-CD-T
D4	6-501-358-01	s	DIODE CL-197HG5-CD-T
D5	6-501-358-01	s	DIODE CL-197HG5-CD-T
D6	8-719-077-09	s	DIODE CL-196HR-CD-T
D7	8-719-077-09	s	DIODE CL-196HR-CD-T
D8	8-719-064-41	s	DIODE CL-191Y-CD-T
D9	8-719-064-41	s	DIODE CL-191Y-CD-T
D10	6-501-358-01	s	DIODE CL-197HG5-CD-T
D11	6-501-358-01	s	DIODE CL-197HG5-CD-T
D12	8-719-077-09	s	DIODE CL-196HR-CD-T
D13	8-719-077-09	s	DIODE CL-196HR-CD-T
D14	8-719-064-41	s	DIODE CL-191Y-CD-T
D15	8-719-064-41	s	DIODE CL-191Y-CD-T
D16	8-719-024-81	s	DIODE 1SS300-TE85L
D17	6-501-358-01	s	DIODE CL-197HG5-CD-T
D18	6-501-358-01	s	DIODE CL-197HG5-CD-T
D19	8-719-077-09	s	DIODE CL-196HR-CD-T
D20	8-719-077-09	s	DIODE CL-196HR-CD-T
IC1	8-759-278-58	s	IC NJM4558V-TE2
JC3	1-218-990-81	s	CONDUCTOR, CHIP (1005)
JC4	1-218-990-81	s	CONDUCTOR, CHIP (1005)
L1	1-414-404-41	s	INDUCTOR (SMD) 100.0UH
L2	1-414-404-41	s	INDUCTOR (SMD) 100.0UH
L3	1-414-404-41	s	INDUCTOR (SMD) 100.0UH
L4	1-414-404-41	s	INDUCTOR (SMD) 100.0UH
L5	1-414-404-41	s	INDUCTOR (SMD) 100.0UH

(AU-303G BOARD suffix 21)

Ref. No. or Q'ty	Part No.	SP	Description
L6	1-414-404-41	s	INDUCTOR (SMD) 100.0UH
L7	1-414-404-41	s	INDUCTOR (SMD) 100.0UH
R1	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4	1-208-887-81	s	RES, CHIP 1.0K (1005)
R5	1-208-875-81	s	RES, CHIP 330 (1005)
R6	1-208-875-81	s	RES, CHIP 330 (1005)
R7	1-208-911-81	s	RES, CHIP 10K (1005)
R8	1-208-919-81	s	RES, CHIP 22K (1005)
R9	1-208-875-81	s	RES, CHIP 330 (1005)
R10	1-208-919-81	s	RES, CHIP 22K (1005)
R11	1-208-863-81	s	RES, CHIP 100 (1005)
R12	1-208-863-81	s	RES, CHIP 100 (1005)
R13	1-208-863-81	s	RES, CHIP 100 (1005)
R14	1-208-863-81	s	RES, CHIP 100 (1005)
R15	1-208-855-81	s	RES, CHIP 47 (1005)
R16	1-208-863-81	s	RES, CHIP 100 (1005)
R17	1-208-935-81	s	RES, CHIP 100K (1005)
R18	1-208-935-81	s	RES, CHIP 100K (1005)
R19	1-208-895-81	s	RES, CHIP 2.2K (1005)
R20	1-208-891-81	s	RES, CHIP 1.5K (1005)
R21	1-208-911-81	s	RES, CHIP 10K (1005)
R22	1-208-895-81	s	RES, CHIP 2.2K (1005)
R23	1-208-891-81	s	RES, CHIP 1.5K (1005)
R24	1-208-895-81	s	RES, CHIP 2.2K (1005)
R25	1-220-878-81	s	RES, CHIP 22 (1005)
R26	1-208-943-81	s	RES, CHIP 220K (1005)
R27	1-208-919-81	s	RES, CHIP 22K (1005)
R28	1-208-895-81	s	RES, CHIP 2.2K (1005)
R29	1-208-943-81	s	RES, CHIP 220K (1005)
R30	1-208-863-81	s	RES, CHIP 100 (1005)
R31	1-208-935-81	s	RES, CHIP 100K (1005)
R32	1-208-943-81	s	RES, CHIP 220K (1005)
R33	1-208-943-81	s	RES, CHIP 220K (1005)
R34	1-208-863-81	s	RES, CHIP 100 (1005)
RV1	1-238-255-21	s	RES, VAR, CARBON 10K
S2	1-762-122-11	s	SWITCH, TOGGLE
S3	1-762-123-11	s	SWITCH, TOGGLE
S4	1-762-123-11	s	SWITCH, TOGGLE
S5	1-786-333-21	s	SWITCH, SLIDE (SMD)
S6	1-571-275-41	s	SWITCH, SLIDE

AU-303/303G BOARD (suffix 11)

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1161-086-A	s	MOUNTED CIRCUIT BOARD, AU-303G (GOLD)
1pc	A-1129-310-A	s	MOUNTED CIRCUIT BOARD, AU-303 (SILVER)
C3	1-100-505-11	s	CAPACITOR,CERAMIC 0.1MF B 1005
C4	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C5	1-128-416-11	s	CAPACITOR ELECT 100MF/16V(105C
C6	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C7	1-100-505-11	s	CAPACITOR,CERAMIC 0.1MF B 1005
C8	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C9	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C10	1-115-153-11	s	CAPACITOR,ELECT 4.7MF/16V(BP)
C11	1-115-153-11	s	CAPACITOR,ELECT 4.7MF/16V(BP)
C12	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C13	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C14	1-164-315-11	s	CAPACITOR,CERAMIC 470PF/50V CH
C15	1-107-823-11	s	CAPACITOR,CERAMIC 0.47MF/16V
C16	1-100-505-11	s	CAPACITOR,CERAMIC 0.1MF B 1005
C21	1-100-505-11	s	CAPACITOR,CERAMIC 0.1MF B 1005
C22	1-100-505-11	s	CAPACITOR,CERAMIC 0.1MF B 1005
C23	1-100-505-11	s	CAPACITOR,CERAMIC 0.1MF B 1005
C24	1-100-505-11	s	CAPACITOR,CERAMIC 0.1MF B 1005
C25	1-100-505-11	s	CAPACITOR,CERAMIC 0.1MF B 1005
C26	1-100-505-11	s	CAPACITOR,CERAMIC 0.1MF B 1005
C27	1-100-505-11	s	CAPACITOR,CERAMIC 0.1MF B 1005
C28	1-100-505-11	s	CAPACITOR,CERAMIC 0.1MF B 1005
C29	1-100-505-11	s	CAPACITOR,CERAMIC 0.1MF B 1005
C30	1-100-505-11	s	CAPACITOR,CERAMIC 0.1MF B 1005
CN1	1-778-534-31	s	CONNECTOR, FFC/FPC(ZIF) ST 45P (GOLD)
	1-778-534-21	o	CONNECTOR, FFC (ZIF) 45P (SILVER)
CN2	1-764-080-21	o	PIN, CONNECTOR (PC BOARD) 8P
CN3	1-766-767-51	s	CONNECTOR, FPC 12P
CN4	1-764-441-51	s	CONNECTOR, FPC 30P
D1	8-719-064-41	s	DIODE CL-191Y-CD-T
D2	6-500-276-01	s	DIODE CL-191G1-C-T
D3	8-719-077-09	s	DIODE CL-196HR-CD-T
D4	6-500-276-01	s	DIODE CL-191G1-C-T
D5	6-500-276-01	s	DIODE CL-191G1-C-T
D6	8-719-077-09	s	DIODE CL-196HR-CD-T
D7	8-719-077-09	s	DIODE CL-196HR-CD-T
D8	8-719-064-41	s	DIODE CL-191Y-CD-T
D9	8-719-064-41	s	DIODE CL-191Y-CD-T
D10	6-500-276-01	s	DIODE CL-191G1-C-T
D11	6-500-276-01	s	DIODE CL-191G1-C-T
D12	8-719-077-09	s	DIODE CL-196HR-CD-T
D13	8-719-077-09	s	DIODE CL-196HR-CD-T
D14	8-719-064-41	s	DIODE CL-191Y-CD-T
D15	8-719-064-41	s	DIODE CL-191Y-CD-T
D16	8-719-024-81	s	DIODE 1SS300-TE85L
D17	6-500-276-01	s	DIODE CL-191G1-C-T
D18	6-500-276-01	s	DIODE CL-191G1-C-T
D19	8-719-077-09	s	DIODE CL-196HR-CD-T
D20	8-719-077-09	s	DIODE CL-196HR-CD-T
IC1	8-759-278-58	s	IC NJM4558V (TE2)
JC3	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
JC4	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)

(AU-303/303G BOARD suffix 11)

Ref. No. or Q'ty	Part No.	SP	Description
L1	1-414-404-11	s	INDUCTOR (SMD) 100UH
L2	1-414-404-11	s	INDUCTOR (SMD) 100UH
L3	1-414-404-11	s	INDUCTOR (SMD) 100UH
L4	1-414-404-11	s	INDUCTOR (SMD) 100UH
L5	1-414-404-11	s	INDUCTOR (SMD) 100UH
L6	1-414-404-11	s	INDUCTOR (SMD) 100UH
L7	1-414-404-11	s	INDUCTOR (SMD) 100UH
R1	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R2	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R3	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R4	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R5	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R6	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R7	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R8	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R9	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R10	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R11	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R12	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R13	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R14	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R15	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R16	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R17	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R18	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R19	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R20	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005
R21	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R22	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R23	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005
R24	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R25	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R26	1-208-943-11	s	RESISTOR CHIP 220K
R27	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R28	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R29	1-208-943-11	s	RESISTOR CHIP 220K
R30	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R31	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R32	1-208-943-11	s	RESISTOR CHIP 220K
R33	1-208-943-11	s	RESISTOR CHIP 220K
R34	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
RV1	1-238-255-21	s	RESISTOR,VAR,CARBON 10K
S2	1-762-122-11	s	SWITCH, TOGGLE
S3	1-762-123-11	s	SWITCH, TOGGLE
S4	1-762-123-11	s	SWITCH, TOGGLE
S5	1-786-333-21	s	SWITCH, SLIDE (SMD)
S6	1-571-275-31	s	SWITCH,SLIDE (1-1-2)

AVP-6 BOARD (suffix 12, 31)

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1129-300-A	s	MOUNTED CIRCUIT BOARD, AVP-6
4pcs	7-682-947-01	s	SCREW +PSW 3X6
C100	1-100-505-91	s	CAP, CERAMIC 0.1MF C (1005)
C101	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3225
C102	1-127-573-91	s	CAP, CHIP CERAMIC 1MF B (2012)
C103	1-127-573-91	s	CAP, CHIP CERAMIC 1MF B (2012)
C104	1-127-573-91	s	CAP, CHIP CERAMIC 1MF B (2012)
C105	1-127-573-91	s	CAP, CHIP CERAMIC 1MF B (2012)
C106	1-127-573-91	s	CAP, CHIP CERAMIC 1MF B (2012)
C107	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C108	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C109	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C110	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C111	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C112	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3225
C113	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C114	1-100-505-91	s	CAP, CERAMIC 0.1MF C (1005)
C115	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C116	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C117	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C118	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C119	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C120	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C121	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3225
C123	1-127-573-91	s	CAP, CHIP CERAMIC 1MF B (2012)
C124	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C125	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C126	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C127	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C129	1-127-573-91	s	CAP, CHIP CERAMIC 1MF B (2012)
C130	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C131	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C132	1-127-573-91	s	CAP, CHIP CERAMIC 1MF B (2012)
C133	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C134	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C135	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C136	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C137	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C138	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C139	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C140	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C141	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C143	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C144	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C145	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C146	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C147	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C148	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C149	1-164-936-81	s	CAP, CHIP CERAMIC 680PF B 1005
C150	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C151	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C152	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C153	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C154	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C155	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C156	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3225
C157	1-107-826-91	s	CAP, CHIP CERAMIC 100000PF B
C158	1-107-826-91	s	CAP, CHIP CERAMIC 100000PF B

(AVP-6 BOARD suffix 12, 31)

Ref. No. or Q'ty	Part No.	SP	Description
C159	1-107-826-91	s	CAP, CHIP CERAMIC 100000PF B
C160	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C161	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C162	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C163	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C164	1-107-826-91	s	CAP, CHIP CERAMIC 100000PF B
C165	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C166	1-107-826-91	s	CAP, CHIP CERAMIC 100000PF B
C167	1-107-826-91	s	CAP, CHIP CERAMIC 100000PF B
C168	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C169	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C170	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C171	1-107-826-91	s	CAP, CHIP CERAMIC 100000PF B
C172	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C173	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C174	1-107-826-91	s	CAP, CHIP CERAMIC 100000PF B
C175	1-107-826-91	s	CAP, CHIP CERAMIC 100000PF B
C176	1-107-826-91	s	CAP, CHIP CERAMIC 100000PF B
C177	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C178	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C179	1-107-826-91	s	CAP, CHIP CERAMIC 100000PF B
C200	1-100-505-91	s	CAP, CERAMIC 0.1MF C (1005)
C201	1-100-505-91	s	CAP, CERAMIC 0.1MF C (1005)
C202	1-100-505-91	s	CAP, CERAMIC 0.1MF C (1005)
C203	1-100-505-91	s	CAP, CERAMIC 0.1MF C (1005)
C204	1-100-505-91	s	CAP, CERAMIC 0.1MF C (1005)
C205	1-100-505-91	s	CAP, CERAMIC 0.1MF C (1005)
C206	1-100-505-91	s	CAP, CERAMIC 0.1MF C (1005)
C207	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C208	1-100-505-91	s	CAP, CERAMIC 0.1MF C (1005)
C300	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C301	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C302	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C303	1-100-505-91	s	CAP, CERAMIC 0.1MF C (1005)
C304	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C305	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C306	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C307	1-100-505-91	s	CAP, CERAMIC 0.1MF C (1005)
C308	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C309	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C310	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C311	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C312	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C313	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C314	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C315	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C316	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C317	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C318	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C319	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C320	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C321	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C322	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C323	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C324	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C325	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C326	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C327	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C328	1-165-989-91	s	CAP, CERAMIC 10MF (2012)

(AVP-6 BOARD suffix 12, 31)

Ref. No. or Q'ty	Part No.	SP	Description
C329	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C330	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C331	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C332	1-100-505-91	s	CAP, CERAMIC 0.1MF C (1005)
C333	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C334	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C335	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C336	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C337	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C338	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C339	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C340	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C341	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C342	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C343	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C344	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C345	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C346	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C347	1-100-505-91	s	CAP, CERAMIC 0.1MF C (1005)
C348	1-127-573-91	s	CAP, CHIP CERAMIC 1MF B (2012)
C349	1-164-854-81	s	CAP, CHIP CERAMIC 15PF CH 1005
C350	1-100-505-91	s	CAP, CERAMIC 0.1MF C (1005)
C351	1-100-505-91	s	CAP, CERAMIC 0.1MF C (1005)
C352	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C353	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C354	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C355	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C356	1-100-505-91	s	CAP, CERAMIC 0.1MF C (1005)
C357	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C358	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C359	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C360	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C361	1-100-505-91	s	CAP, CERAMIC 0.1MF C (1005)
C362	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C363	1-100-505-91	s	CAP, CERAMIC 0.1MF C (1005)
C364	1-127-573-91	s	CAP, CHIP CERAMIC 1MF B (2012)
C365	1-164-854-81	s	CAP, CHIP CERAMIC 15PF CH 1005
C366	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C367	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C368	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C369	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C400	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C402	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C403	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C404	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C405	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C406	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C407	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C408	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C409	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C410	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C411	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C412	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C413	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C414	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C415	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C416	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C417	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C418	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005

(AVP-6 BOARD suffix 12, 31)

Ref. No. or Q'ty	Part No.	SP	Description
C419	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C420	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C421	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C422	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C425	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C426	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C428	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C429	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C430	1-126-395-21	s	CAP, CHIP ELECT 22MF (5X5.7)
C431	1-126-395-21	s	CAP, CHIP ELECT 22MF (5X5.7)
C432	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C433	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C434	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3225
C435	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3225
C436	1-164-315-91	s	CAP, CERAMIC 470PF CH (1608)
C438	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C439	1-162-964-91	s	CAP,CHIP CERAMIC 1000PF B 1608
C440	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C441	1-107-781-21	s	CAP, ELECT 47MF
C443	1-107-781-21	s	CAP, ELECT 47MF
C445	1-100-505-91	s	CAP, CERAMIC 0.1MF C (1005)
C446	1-100-505-91	s	CAP, CERAMIC 0.1MF C (1005)
C447	1-117-142-21	s	CAP, ELECT 0.22MF
C448	1-107-781-21	s	CAP, ELECT 47MF
C450	1-117-142-21	s	CAP, ELECT 0.22MF
C451	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C453	1-164-939-81	s	CAP, CHIPCERAMIC 2200PF B 1005
C454	1-164-939-81	s	CAP, CHIPCERAMIC 2200PF B 1005
C455	1-164-939-81	s	CAP, CHIPCERAMIC 2200PF B 1005
C456	1-164-939-81	s	CAP, CHIPCERAMIC 2200PF B 1005
C502	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C503	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C504	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C505	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C506	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C507	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C508	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C509	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C510	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C511	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C512	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C513	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3225
C514	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C515	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C516	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C517	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C518	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C519	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C520	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C521	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C522	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C523	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C524	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C525	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C526	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C527	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C528	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C529	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C530	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(AVP-6 BOARD suffix 12, 31)

Ref. No. or Q'ty	Part No.	SP	Description
C531	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C532	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C533	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C534	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C535	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C536	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C538	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C539	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C541	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C542	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C543	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C546	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C547	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C552	1-164-939-81	s	CAP, CHIPCERAMIC 2200PF B 1005
C553	1-164-939-81	s	CAP, CHIPCERAMIC 2200PF B 1005
C554	1-164-939-81	s	CAP, CHIPCERAMIC 2200PF B 1005
C555	1-164-939-81	s	CAP, CHIPCERAMIC 2200PF B 1005
C600	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C601	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C602	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C603	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C604	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C605	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C606	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C607	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C608	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C609	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C610	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C611	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C612	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C613	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C614	1-126-395-21	s	CAP, CHIP ELECT 22MF (5X5.7)
C615	1-126-395-21	s	CAP, CHIP ELECT 22MF (5X5.7)
C616	1-100-505-91	s	CAP, CERAMIC 0.1MF C (1005)
C617	1-100-505-91	s	CAP, CERAMIC 0.1MF C (1005)
C618	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C619	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C620	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C621	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C622	1-126-395-21	s	CAP, CHIP ELECT 22MF (5X5.7)
C623	1-126-395-21	s	CAP, CHIP ELECT 22MF (5X5.7)
C624	1-100-505-91	s	CAP, CERAMIC 0.1MF C (1005)
C625	1-100-505-91	s	CAP, CERAMIC 0.1MF C (1005)
C626	1-127-573-91	s	CAP, CHIP CERAMIC 1MF B (2012)
C627	1-127-573-91	s	CAP, CHIP CERAMIC 1MF B (2012)
C628	1-126-395-21	s	CAP, CHIP ELECT 22MF (5X5.7)
C629	1-126-395-21	s	CAP, CHIP ELECT 22MF (5X5.7)
C630	1-126-395-21	s	CAP, CHIP ELECT 22MF (5X5.7)
C631	1-126-395-21	s	CAP, CHIP ELECT 22MF (5X5.7)
C632	1-107-781-21	s	CAP, ELECT 47MF
C633	1-107-781-21	s	CAP, ELECT 47MF
C634	1-107-781-21	s	CAP, ELECT 47MF
C635	1-107-781-21	s	CAP, ELECT 47MF
C636	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3225
C637	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3225
C640	1-126-395-21	s	CAP, CHIP ELECT 22MF (5X5.7)
C641	1-126-395-21	s	CAP, CHIP ELECT 22MF (5X5.7)
C642	1-126-395-21	s	CAP, CHIP ELECT 22MF (5X5.7)
C643	1-126-395-21	s	CAP, CHIP ELECT 22MF (5X5.7)

(AVP-6 BOARD suffix 12, 31)

Ref. No. or Q'ty	Part No.	SP	Description
C644	1-128-407-21	s	CAP, ELECT 47MF 8X10
C645	1-128-407-21	s	CAP, ELECT 47MF 8X10
C646	1-128-407-21	s	CAP, ELECT 47MF 8X10
C647	1-128-407-21	s	CAP, ELECT 47MF 8X10
C648	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C649	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C650	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C651	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C652	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C653	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C654	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C655	1-164-939-81	s	CAP, CHIPCERAMIC 2200PF B 1005
C656	1-164-939-81	s	CAP, CHIPCERAMIC 2200PF B 1005
C700	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C701	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C702	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C703	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C704	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C705	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C706	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C707	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C708	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C709	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C710	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C711	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C712	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C713	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C714	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C715	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C716	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C717	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C718	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C719	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C720	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C721	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C722	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C723	1-164-940-81	s	CAP,CHIP CERAMIC 3300PF B 1005
C724	1-164-940-81	s	CAP,CHIP CERAMIC 3300PF B 1005
C725	1-164-940-81	s	CAP,CHIP CERAMIC 3300PF B 1005
C726	1-164-940-81	s	CAP,CHIP CERAMIC 3300PF B 1005
C727	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C728	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
CN3	1-764-093-21	o	PIN, CONNECTOR (PC BOARD) 8P
D100	8-719-017-03	s	DIODE 02DZ4.7-TPH3
D101	8-719-017-03	s	DIODE 02DZ4.7-TPH3
D102	8-719-017-03	s	DIODE 02DZ4.7-TPH3
D103	8-719-017-03	s	DIODE 02DZ4.7-TPH3
D104	8-719-074-31	s	DIODE CL-196YG-CD-T
D105	8-719-074-31	s	DIODE CL-196YG-CD-T
D106	8-719-074-31	s	DIODE CL-196YG-CD-T
D107	8-719-064-41	s	DIODE CL-191Y-CD-T
D400	8-719-421-28	s	DIODE MA728-TX
D401	8-719-421-28	s	DIODE MA728-TX
D402	8-719-421-28	s	DIODE MA728-TX
D403	8-719-421-28	s	DIODE MA728-TX
D404	8-719-016-84	s	DIODE 02DZ2.0-TPH3
D405	8-719-016-84	s	DIODE 02DZ2.0-TPH3
D406	8-719-421-28	s	DIODE MA728-TX

(AVP-6 BOARD suffix 12, 31)

Ref. No. or Q'ty	Part No.	SP	Description
D407	8-719-421-28	s	DIODE MA728-TX
D408	8-719-016-84	s	DIODE 02DZ2.0-TPH3
D409	8-719-016-84	s	DIODE 02DZ2.0-TPH3
D410	8-719-016-84	s	DIODE 02DZ2.0-TPH3
D411	8-719-016-84	s	DIODE 02DZ2.0-TPH3
D500	8-719-421-28	s	DIODE MA728-TX
D501	8-719-421-28	s	DIODE MA728-TX
D502	8-719-421-28	s	DIODE MA728-TX
D503	8-719-421-28	s	DIODE MA728-TX
D504	8-719-016-84	s	DIODE 02DZ2.0-TPH3
D505	8-719-016-84	s	DIODE 02DZ2.0-TPH3
D506	8-719-016-84	s	DIODE 02DZ2.0-TPH3
D507	8-719-016-84	s	DIODE 02DZ2.0-TPH3
D600	8-719-421-28	s	DIODE MA728-TX
D601	8-719-421-28	s	DIODE MA728-TX
D602	8-719-421-28	s	DIODE MA728-TX
D603	8-719-421-28	s	DIODE MA728-TX
D604	8-719-016-84	s	DIODE 02DZ2.0-TPH3
D605	8-719-016-84	s	DIODE 02DZ2.0-TPH3
D606	8-719-016-84	s	DIODE 02DZ2.0-TPH3
D607	8-719-016-84	s	DIODE 02DZ2.0-TPH3
D700	8-719-024-81	s	DIODE 1SS300-TE85L
D701	8-719-024-81	s	DIODE 1SS300-TE85L
D702	8-719-024-81	s	DIODE 1SS300-TE85L
D703	8-719-024-83	s	DIODE 1SS301-TE85L
D704	8-719-024-83	s	DIODE 1SS301-TE85L
D705	8-719-024-83	s	DIODE 1SS301-TE85L
D706	8-719-017-05	s	DIODE 02DZ5.1-TPH3
D707	8-719-017-05	s	DIODE 02DZ5.1-TPH3
D708	8-719-017-05	s	DIODE 02DZ5.1-TPH3
D709	8-719-024-83	s	DIODE 1SS301-TE85L
D710	8-719-024-83	s	DIODE 1SS301-TE85L
D711	8-719-024-83	s	DIODE 1SS301-TE85L
D712	8-719-024-81	s	DIODE 1SS300-TE85L
D713	8-719-024-81	s	DIODE 1SS300-TE85L
D714	8-719-024-81	s	DIODE 1SS300-TE85L
D715	8-719-016-84	s	DIODE 02DZ2.0-TPH3
D716	8-719-024-81	s	DIODE 1SS300-TE85L
D717	8-719-024-81	s	DIODE 1SS300-TE85L
D718	8-719-024-83	s	DIODE 1SS301-TE85L
D719	8-719-024-83	s	DIODE 1SS301-TE85L
D720	8-719-016-84	s	DIODE 02DZ2.0-TPH3
E1	1-535-877-22	s	CHIP, CHECKER
E2	1-535-877-22	s	CHIP, CHECKER
E3	1-535-877-22	s	CHIP, CHECKER
E4	1-535-877-22	s	CHIP, CHECKER
FB100	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB101	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
IC100	8-759-327-01	s	IC NJM062V(TE2)
IC101	8-759-327-01	s	IC NJM062V(TE2)
IC102	8-759-338-95	s	IC NJM2903V(TE2)
IC103	8-759-338-95	s	IC NJM2903V(TE2)
IC104	6-701-572-01	s	IC TPS54610PWPR
IC105	8-759-327-01	s	IC NJM062V(TE2)
IC106	6-704-976-01	s	IC ADR381ARTZ-REEL7
IC107	8-759-471-96	s	IC 74VHC08MTCX
IC108	8-759-648-61	s	IC LTC1387CG
IC109	8-759-648-61	s	IC LTC1387CG

(AVP-6 BOARD suffix 12, 31)

Ref. No. or Q'ty	Part No.	SP	Description
IC200	8-759-392-77	s	IC SN74LVC245APWR
IC201	8-759-392-77	s	IC SN74LVC245APWR
IC202	8-759-392-77	s	IC SN74LVC245APWR
IC203	8-759-472-18	s	IC 74VHC138MTCX
IC204	8-759-363-26	s	IC RN5VD28AA-TL-FA
IC205	6-706-489-01	s	IC TC7SH32FU(T5RSOYJF)
IC206	8-752-392-03	s	IC CXD1095BR
IC207	8-759-471-96	s	IC 74VHC08MTCX
IC300	6-704-463-01	s	IC CY7C1021CV33-15ZXCT
IC301	8-759-485-24	s	IC MC74HC4046ADTR2
IC303	8-759-669-66	s	IC TLC272CPWR-12
IC304	8-759-592-44	s	IC TC7SZ04FU(TE85R)
IC305	8-759-471-96	s	IC 74VHC08MTCX
IC308	8-759-392-77	s	IC SN74LVC245APWR
IC309	8-759-392-77	s	IC SN74LVC245APWR
IC311	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC312	8-759-392-77	s	IC SN74LVC245APWR
IC313	8-759-392-77	s	IC SN74LVC245APWR
IC314	8-759-392-77	s	IC SN74LVC245APWR
IC315	8-759-392-77	s	IC SN74LVC245APWR
IC316	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC317	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC318	8-759-524-27	s	IC TC74VHC244FT(EL)
IC319	8-759-441-31	s	IC MC14053BDTR2
IC320	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC321	8-759-592-44	s	IC TC7SZ04FU(TE85R)
IC401	6-700-563-01	s	IC AK4552VT-E2
IC402	6-700-563-01	s	IC AK4552VT-E2
IC403	8-759-278-58	s	IC NJM4558V-TE2
IC404	8-759-441-31	s	IC MC14053BDTR2
IC405	8-759-278-58	s	IC NJM4558V-TE2
IC406	8-759-422-21	s	IC NJM4580V(TE2)
IC407	8-759-422-21	s	IC NJM4580V(TE2)
IC409	8-759-278-58	s	IC NJM4558V-TE2
IC410	8-759-278-58	s	IC NJM4558V-TE2
IC500	6-700-563-01	s	IC AK4552VT-E2
IC501	6-700-563-01	s	IC AK4552VT-E2
IC502	8-759-278-58	s	IC NJM4558V-TE2
IC503	8-759-278-58	s	IC NJM4558V-TE2
IC504	8-759-278-58	s	IC NJM4558V-TE2
IC505	8-759-422-21	s	IC NJM4580V(TE2)
IC506	8-759-422-21	s	IC NJM4580V(TE2)
IC507	8-759-278-58	s	IC NJM4558V-TE2
IC508	8-759-278-58	s	IC NJM4558V-TE2
IC600	6-700-563-01	s	IC AK4552VT-E2
IC601	8-759-278-58	s	IC NJM4558V-TE2
IC602	8-759-278-58	s	IC NJM4558V-TE2
IC603	8-759-278-58	s	IC NJM4558V-TE2
IC604	8-759-278-58	s	IC NJM4558V-TE2
IC605	8-759-441-31	s	IC MC14053BDTR2
IC606	8-759-441-31	s	IC MC14053BDTR2
IC607	8-759-422-21	s	IC NJM4580V(TE2)
IC608	8-759-422-21	s	IC NJM4580V(TE2)
IC609	8-759-278-58	s	IC NJM4558V-TE2
IC610	8-759-278-58	s	IC NJM4558V-TE2
IC611	8-759-422-21	s	IC NJM4580V(TE2)
IC612	8-759-422-21	s	IC NJM4580V(TE2)
IC613	8-759-278-58	s	IC NJM4558V-TE2
IC614	8-759-278-58	s	IC NJM4558V-TE2

(AVP-6 BOARD suffix 12, 31)

Ref. No. or Q'ty	Part No.	SP	Description
IC701	8-759-653-03	s	IC NJM78M05DL1A-TE1
IC702	8-759-653-03	s	IC NJM78M05DL1A-TE1
IC703	8-759-653-03	s	IC NJM78M05DL1A-TE1
JC100	1-218-990-81	s	CONDUCTOR, CHIP (1005)
JC201	1-218-990-81	s	CONDUCTOR, CHIP (1005)
JC500	1-216-864-91	s	CONDUCTOR, CHIP (1608)
JC503	1-216-864-91	s	CONDUCTOR, CHIP (1608)
JC504	1-216-864-91	s	CONDUCTOR, CHIP (1608)
JC507	1-216-864-91	s	CONDUCTOR, CHIP (1608)
JC700	1-218-990-81	s	CONDUCTOR, CHIP (1005)
JC701	1-218-990-81	s	CONDUCTOR, CHIP (1005)
JC702	1-218-990-81	s	CONDUCTOR, CHIP (1005)
JC703	1-218-990-81	s	CONDUCTOR, CHIP (1005)
JC704	1-218-990-81	s	CONDUCTOR, CHIP (1005)
L100	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L101	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L102	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L103	1-416-344-21	s	COIL, CHOKE 10UH
L104	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L105	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L106	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L300	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L301	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L302	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L303	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L304	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L305	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L306	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L307	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L400	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L401	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L402	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L403	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L500	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L501	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L604	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L605	1-414-400-41	s	INDUCTOR (SMD) 22.0UH
L606	1-414-400-41	s	INDUCTOR (SMD) 22.0UH
L607	1-414-400-41	s	INDUCTOR (SMD) 22.0UH
L608	1-414-400-41	s	INDUCTOR (SMD) 22.0UH
L700	1-414-400-41	s	INDUCTOR (SMD) 22.0UH
L701	1-414-400-41	s	INDUCTOR (SMD) 22.0UH
L702	1-414-400-41	s	INDUCTOR (SMD) 22.0UH
PH700	8-749-014-35	s	IC HCPL-0630-500
PH701	8-749-014-35	s	IC HCPL-0630-500
Q1	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q100	8-729-209-73	s	TRANSISTOR 2SA1213Y-TE12L
Q101	8-729-209-77	s	TRANSISTOR 2SC2873Y-TE12L
Q102	8-729-209-73	s	TRANSISTOR 2SA1213Y-TE12L
Q103	8-729-209-73	s	TRANSISTOR 2SA1213Y-TE12L
Q104	8-729-209-77	s	TRANSISTOR 2SC2873Y-TE12L
Q105	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q106	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q107	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q108	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q109	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q110	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR

(AVP-6 BOARD suffix 12, 31)

Ref. No. or Q'ty	Part No.	SP	Description
Q600	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q601	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q602	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q603	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q604	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q605	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q606	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q607	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q608	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q609	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q610	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q611	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q700	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q701	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q702	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q703	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q704	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q705	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q706	8-729-141-76	s	TRANSISTOR 2SD596T1-DV345
Q707	8-729-141-76	s	TRANSISTOR 2SD596T1-DV345
Q710	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q711	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q712	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q713	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q714	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q715	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q716	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
R100	1-208-879-81	s	RES, CHIP 470 (1005)
R101	1-208-879-81	s	RES, CHIP 470 (1005)
R102	1-208-871-81	s	RES, CHIP 220 (1005)
R103	1-208-871-81	s	RES, CHIP 220 (1005)
R104	1-208-931-81	s	RES, CHIP 68K (1005)
R105	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R106	1-208-927-81	s	RES, CHIP 47K (1005)
R107	1-208-923-81	s	RES, CHIP 33K (1005)
R108	1-208-923-81	s	RES, CHIP 33K (1005)
R109	1-208-931-81	s	RES, CHIP 68K (1005)
R110	1-208-935-81	s	RES, CHIP 100K (1005)
R111	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R113	1-208-927-81	s	RES, CHIP 47K (1005)
R114	1-208-915-81	s	RES, CHIP 15K (1005)
R115	1-208-935-81	s	RES, CHIP 100K (1005)
R116	1-208-935-81	s	RES, CHIP 100K (1005)
R117	1-208-863-81	s	RES, CHIP 100 (1005)
R118	1-208-879-81	s	RES, CHIP 470 (1005)
R119	1-208-931-81	s	RES, CHIP 68K (1005)
R120	1-208-931-81	s	RES, CHIP 68K (1005)
R121	1-208-871-81	s	RES, CHIP 220 (1005)
R122	1-208-923-81	s	RES, CHIP 33K (1005)
R123	1-208-923-81	s	RES, CHIP 33K (1005)
R124	1-208-891-81	s	RES, CHIP 1.5K (1005)
R125	1-208-919-81	s	RES, CHIP 22K (1005)
R126	1-208-907-81	s	RES, CHIP 6.8K (1005)
R127	1-208-923-81	s	RES, CHIP 33K (1005)
R128	1-208-863-81	s	RES, CHIP 100 (1005)
R129	1-208-911-81	s	RES, CHIP 10K (1005)
R130	1-208-911-81	s	RES, CHIP 10K (1005)
R131	1-208-903-81	s	RES, CHIP 4.7K (1005)

(AVP-6 BOARD suffix 12, 31)

Ref. No. or Q'ty	Part No.	SP	Description
R132	1-208-927-81	s	RES, CHIP 47K (1005)
R133	1-208-915-81	s	RES, CHIP 15K (1005)
R134	1-208-915-81	s	RES, CHIP 15K (1005)
R135	1-220-870-81	s	RES, CHIP 10 (1005)
R136	1-220-870-81	s	RES, CHIP 10 (1005)
R137	1-220-870-81	s	RES, CHIP 10 (1005)
R138	1-220-870-81	s	RES, CHIP 10 (1005)
R139	1-208-919-81	s	RES, CHIP 22K (1005)
R141	1-208-927-81	s	RES, CHIP 47K (1005)
R144	1-208-887-81	s	RES, CHIP 1.0K (1005)
R146	1-208-927-81	s	RES, CHIP 47K (1005)
R147	1-208-927-81	s	RES, CHIP 47K (1005)
R148	1-208-911-81	s	RES, CHIP 10K (1005)
R149	1-208-911-81	s	RES, CHIP 10K (1005)
R150	1-208-887-81	s	RES, CHIP 1.0K (1005)
R151	1-208-927-81	s	RES, CHIP 47K (1005)
R152	1-208-887-81	s	RES, CHIP 1.0K (1005)
R154	1-208-911-81	s	RES, CHIP 10K (1005)
R155	1-208-919-81	s	RES, CHIP 22K (1005)
R156	1-208-935-81	s	RES, CHIP 100K (1005)
R157	1-208-927-81	s	RES, CHIP 47K (1005)
R159	1-208-887-81	s	RES, CHIP 1.0K (1005)
R160	1-220-870-81	s	RES, CHIP 10 (1005)
R161	1-220-870-81	s	RES, CHIP 10 (1005)
R162	1-220-870-81	s	RES, CHIP 10 (1005)
R163	1-220-870-81	s	RES, CHIP 10 (1005)
R164	1-208-895-81	s	RES, CHIP 2.2K (1005)
R165	1-208-911-81	s	RES, CHIP 10K (1005)
R166	1-208-911-81	s	RES, CHIP 10K (1005)
R167	1-208-911-81	s	RES, CHIP 10K (1005)
R200	1-208-863-81	s	RES, CHIP 100 (1005)
R201	1-208-863-81	s	RES, CHIP 100 (1005)
R202	1-208-935-81	s	RES, CHIP 100K (1005)
R203	1-208-935-81	s	RES, CHIP 100K (1005)
R204	1-208-863-81	s	RES, CHIP 100 (1005)
R205	1-208-935-81	s	RES, CHIP 100K (1005)
R206	1-208-935-81	s	RES, CHIP 100K (1005)
R207	1-208-863-81	s	RES, CHIP 100 (1005)
R209	1-208-935-81	s	RES, CHIP 100K (1005)
R210	1-208-935-81	s	RES, CHIP 100K (1005)
R211	1-208-935-81	s	RES, CHIP 100K (1005)
R212	1-208-935-81	s	RES, CHIP 100K (1005)
R217	1-208-863-81	s	RES, CHIP 100 (1005)
R219	1-208-927-81	s	RES, CHIP 47K (1005)
R220	1-208-935-81	s	RES, CHIP 100K (1005)
R222	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R223	1-208-935-81	s	RES, CHIP 100K (1005)
R224	1-208-935-81	s	RES, CHIP 100K (1005)
R300	1-208-935-81	s	RES, CHIP 100K (1005)
R301	1-208-903-81	s	RES, CHIP 4.7K (1005)
R302	1-208-903-81	s	RES, CHIP 4.7K (1005)
R303	1-208-887-81	s	RES, CHIP 1.0K (1005)
R304	1-208-923-81	s	RES, CHIP 33K (1005)
R305	1-208-919-81	s	RES, CHIP 22K (1005)
R306	1-208-919-81	s	RES, CHIP 22K (1005)
R307	1-220-870-81	s	RES, CHIP 10 (1005)
R308	1-220-870-81	s	RES, CHIP 10 (1005)
R309	1-208-927-81	s	RES, CHIP 47K (1005)
R310	1-208-863-81	s	RES, CHIP 100 (1005)

(AVP-6 BOARD suffix 12, 31)

Ref. No. or Q'ty	Part No.	SP	Description
R311	1-208-959-81	s	RES, CHIP 1M (1005)
R312	1-220-870-81	s	RES, CHIP 10 (1005)
R313	1-208-863-81	s	RES, CHIP 100 (1005)
R314	1-208-863-81	s	RES, CHIP 100 (1005)
R315	1-208-863-81	s	RES, CHIP 100 (1005)
R316	1-208-863-81	s	RES, CHIP 100 (1005)
R317	1-208-935-81	s	RES, CHIP 100K (1005)
R318	1-208-935-81	s	RES, CHIP 100K (1005)
R319	1-208-863-81	s	RES, CHIP 100 (1005)
R320	1-208-863-81	s	RES, CHIP 100 (1005)
R321	1-208-911-81	s	RES, CHIP 10K (1005)
R322	1-208-911-81	s	RES, CHIP 10K (1005)
R323	1-208-887-81	s	RES, CHIP 1.0K (1005)
R324	1-208-863-81	s	RES, CHIP 100 (1005)
R325	1-208-863-81	s	RES, CHIP 100 (1005)
R326	1-208-863-81	s	RES, CHIP 100 (1005)
R327	1-208-895-81	s	RES, CHIP 2.2K (1005)
R328	1-208-887-81	s	RES, CHIP 1.0K (1005)
R329	1-208-863-81	s	RES, CHIP 100 (1005)
R330	1-208-911-81	s	RES, CHIP 10K (1005)
R331	1-208-911-81	s	RES, CHIP 10K (1005)
R332	1-208-887-81	s	RES, CHIP 1.0K (1005)
R333	1-208-887-81	s	RES, CHIP 1.0K (1005)
R334	1-208-887-81	s	RES, CHIP 1.0K (1005)
R335	1-208-860-81	s	RES, CHIP 75 (1005)
R336	1-208-911-81	s	RES, CHIP 10K (1005)
R337	1-208-911-81	s	RES, CHIP 10K (1005)
R338	1-208-887-81	s	RES, CHIP 1.0K (1005)
R339	1-208-911-81	s	RES, CHIP 10K (1005)
R340	1-208-911-81	s	RES, CHIP 10K (1005)
R341	1-208-863-81	s	RES, CHIP 100 (1005)
R342	1-208-863-81	s	RES, CHIP 100 (1005)
R343	1-208-863-81	s	RES, CHIP 100 (1005)
R344	1-208-863-81	s	RES, CHIP 100 (1005)
R345	1-220-870-81	s	RES, CHIP 10 (1005)
R346	1-208-895-81	s	RES, CHIP 2.2K (1005)
R347	1-208-863-81	s	RES, CHIP 100 (1005)
R348	1-208-863-81	s	RES, CHIP 100 (1005)
R349	1-208-863-81	s	RES, CHIP 100 (1005)
R350	1-208-863-81	s	RES, CHIP 100 (1005)
R351	1-220-870-81	s	RES, CHIP 10 (1005)
R352	1-208-863-81	s	RES, CHIP 100 (1005)
R353	1-208-863-81	s	RES, CHIP 100 (1005)
R354	1-208-863-81	s	RES, CHIP 100 (1005)
R355	1-208-863-81	s	RES, CHIP 100 (1005)
R356	1-208-863-81	s	RES, CHIP 100 (1005)
R357	1-208-863-81	s	RES, CHIP 100 (1005)
R358	1-208-863-81	s	RES, CHIP 100 (1005)
R359	1-208-863-81	s	RES, CHIP 100 (1005)
R360	1-208-911-81	s	RES, CHIP 10K (1005)
R361	1-208-887-81	s	RES, CHIP 1.0K (1005)
R362	1-208-895-81	s	RES, CHIP 2.2K (1005)
R363	1-208-887-81	s	RES, CHIP 1.0K (1005)
R364	1-208-863-81	s	RES, CHIP 100 (1005)
R365	1-208-887-81	s	RES, CHIP 1.0K (1005)
R366	1-208-887-81	s	RES, CHIP 1.0K (1005)
R367	1-208-860-81	s	RES, CHIP 75 (1005)
R401	1-208-863-81	s	RES, CHIP 100 (1005)
R402	1-208-863-81	s	RES, CHIP 100 (1005)

(AVP-6 BOARD suffix 12, 31)

Ref. No. or Q'ty	Part No.	SP	Description
R403	1-220-870-81	s	RES, CHIP 10 (1005)
R404	1-208-863-81	s	RES, CHIP 100 (1005)
R405	1-208-863-81	s	RES, CHIP 100 (1005)
R406	1-208-919-81	s	RES, CHIP 22K (1005)
R407	1-220-870-81	s	RES, CHIP 10 (1005)
R408	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R409	1-208-915-81	s	RES, CHIP 15K (1005)
R410	1-208-863-81	s	RES, CHIP 100 (1005)
R411	1-208-863-81	s	RES, CHIP 100 (1005)
R412	1-208-915-81	s	RES, CHIP 15K (1005)
R413	1-208-919-81	s	RES, CHIP 22K (1005)
R414	1-208-919-81	s	RES, CHIP 22K (1005)
R415	1-208-915-81	s	RES, CHIP 15K (1005)
R416	1-208-863-81	s	RES, CHIP 100 (1005)
R417	1-208-919-81	s	RES, CHIP 22K (1005)
R418	1-208-911-81	s	RES, CHIP 10K (1005)
R419	1-208-911-81	s	RES, CHIP 10K (1005)
R420	1-208-863-81	s	RES, CHIP 100 (1005)
R421	1-208-863-81	s	RES, CHIP 100 (1005)
R422	1-208-863-81	s	RES, CHIP 100 (1005)
R423	1-208-947-81	s	RES, CHIP 330K (1005)
R424	1-208-947-81	s	RES, CHIP 330K (1005)
R425	1-208-887-81	s	RES, CHIP 1.0K (1005)
R426	1-208-903-81	s	RES, CHIP 4.7K (1005)
R429	1-208-911-81	s	RES, CHIP 10K (1005)
R430	1-220-870-81	s	RES, CHIP 10 (1005)
R431	1-220-870-81	s	RES, CHIP 10 (1005)
R434	1-208-919-81	s	RES, CHIP 22K (1005)
R435	1-208-935-81	s	RES, CHIP 100K (1005)
R436	1-216-801-91	s	RES, CHIP 22 (1608)
R438	1-216-801-91	s	RES, CHIP 22 (1608)
R440	1-208-919-81	s	RES, CHIP 22K (1005)
R441	1-208-915-81	s	RES, CHIP 15K (1005)
R442	1-208-935-81	s	RES, CHIP 100K (1005)
R443	1-208-915-81	s	RES, CHIP 15K (1005)
R444	1-208-891-81	s	RES, CHIP 1.5K (1005)
R445	1-208-905-81	s	RES, CHIP 5.6K (1005)
R446	1-208-919-81	s	RES, CHIP 22K (1005)
R447	1-208-935-81	s	RES, CHIP 100K (1005)
R448	1-208-935-81	s	RES, CHIP 100K (1005)
R449	1-208-935-81	s	RES, CHIP 100K (1005)
R450	1-208-935-81	s	RES, CHIP 100K (1005)
R451	1-208-863-81	s	RES, CHIP 100 (1005)
R452	1-208-919-81	s	RES, CHIP 22K (1005)
R453	1-208-919-81	s	RES, CHIP 22K (1005)
R454	1-208-919-81	s	RES, CHIP 22K (1005)
R455	1-208-915-81	s	RES, CHIP 15K (1005)
R456	1-208-915-81	s	RES, CHIP 15K (1005)
R457	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R458	1-208-915-81	s	RES, CHIP 15K (1005)
R459	1-208-863-81	s	RES, CHIP 100 (1005)
R460	1-208-895-81	s	RES, CHIP 2.2K (1005)
R462	1-208-863-81	s	RES, CHIP 100 (1005)
R463	1-208-887-81	s	RES, CHIP 1.0K (1005)
R464	1-208-887-81	s	RES, CHIP 1.0K (1005)
R465	1-208-887-81	s	RES, CHIP 1.0K (1005)
R466	1-208-935-81	s	RES, CHIP 100K (1005)
R467	1-208-935-81	s	RES, CHIP 100K (1005)
R468	1-208-903-81	s	RES, CHIP 4.7K (1005)

(AVP-6 BOARD suffix 12, 31)

Ref. No. or Q'ty	Part No.	SP	Description
R469	1-208-911-81	s	RES, CHIP 10K (1005)
R470	1-216-801-91	s	RES, CHIP 22 (1608)
R472	1-216-801-91	s	RES, CHIP 22 (1608)
R500	1-208-863-81	s	RES, CHIP 100 (1005)
R501	1-208-863-81	s	RES, CHIP 100 (1005)
R502	1-208-863-81	s	RES, CHIP 100 (1005)
R503	1-220-870-81	s	RES, CHIP 10 (1005)
R504	1-208-863-81	s	RES, CHIP 100 (1005)
R505	1-220-870-81	s	RES, CHIP 10 (1005)
R506	1-208-911-81	s	RES, CHIP 10K (1005)
R507	1-208-911-81	s	RES, CHIP 10K (1005)
R508	1-208-911-81	s	RES, CHIP 10K (1005)
R509	1-208-911-81	s	RES, CHIP 10K (1005)
R510	1-208-911-81	s	RES, CHIP 10K (1005)
R511	1-208-911-81	s	RES, CHIP 10K (1005)
R512	1-208-911-81	s	RES, CHIP 10K (1005)
R513	1-208-935-81	s	RES, CHIP 100K (1005)
R514	1-208-919-81	s	RES, CHIP 22K (1005)
R515	1-208-919-81	s	RES, CHIP 22K (1005)
R516	1-208-911-81	s	RES, CHIP 10K (1005)
R517	1-208-935-81	s	RES, CHIP 100K (1005)
R518	1-208-899-81	s	RES, CHIP 3.3K (1005)
R519	1-208-919-81	s	RES, CHIP 22K (1005)
R520	1-208-863-81	s	RES, CHIP 100 (1005)
R521	1-208-863-81	s	RES, CHIP 100 (1005)
R522	1-208-899-81	s	RES, CHIP 3.3K (1005)
R523	1-208-919-81	s	RES, CHIP 22K (1005)
R524	1-220-870-81	s	RES, CHIP 10 (1005)
R525	1-220-870-81	s	RES, CHIP 10 (1005)
R526	1-220-870-81	s	RES, CHIP 10 (1005)
R527	1-220-870-81	s	RES, CHIP 10 (1005)
R528	1-208-919-81	s	RES, CHIP 22K (1005)
R529	1-208-919-81	s	RES, CHIP 22K (1005)
R530	1-208-919-81	s	RES, CHIP 22K (1005)
R531	1-208-919-81	s	RES, CHIP 22K (1005)
R532	1-208-911-81	s	RES, CHIP 10K (1005)
R533	1-208-935-81	s	RES, CHIP 100K (1005)
R534	1-208-911-81	s	RES, CHIP 10K (1005)
R535	1-208-935-81	s	RES, CHIP 100K (1005)
R536	1-208-919-81	s	RES, CHIP 22K (1005)
R537	1-208-919-81	s	RES, CHIP 22K (1005)
R538	1-208-935-81	s	RES, CHIP 100K (1005)
R539	1-208-935-81	s	RES, CHIP 100K (1005)
R540	1-208-911-81	s	RES, CHIP 10K (1005)
R541	1-208-911-81	s	RES, CHIP 10K (1005)
R542	1-208-935-81	s	RES, CHIP 100K (1005)
R543	1-208-911-81	s	RES, CHIP 10K (1005)
R544	1-208-935-81	s	RES, CHIP 100K (1005)
R545	1-208-911-81	s	RES, CHIP 10K (1005)
R546	1-208-911-81	s	RES, CHIP 10K (1005)
R547	1-208-935-81	s	RES, CHIP 100K (1005)
R548	1-208-911-81	s	RES, CHIP 10K (1005)
R549	1-208-935-81	s	RES, CHIP 100K (1005)
R550	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R551	1-208-887-81	s	RES, CHIP 1.0K (1005)
R552	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R553	1-208-887-81	s	RES, CHIP 1.0K (1005)
R554	1-216-813-91	s	RES, CHIP 220 (1608)
R556	1-216-813-91	s	RES, CHIP 220 (1608)

(AVP-6 BOARD suffix 12, 31)

Ref. No. or Q'ty	Part No.	SP	Description
R558	1-208-887-81	s	RES, CHIP 1.0K (1005)
R559	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R560	1-208-887-81	s	RES, CHIP 1.0K (1005)
R561	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R562	1-216-813-91	s	RES, CHIP 220 (1608)
R564	1-216-813-91	s	RES, CHIP 220 (1608)
R566	1-208-935-81	s	RES, CHIP 100K (1005)
R567	1-208-935-81	s	RES, CHIP 100K (1005)
R568	1-208-911-81	s	RES, CHIP 10K (1005)
R569	1-208-911-81	s	RES, CHIP 10K (1005)
R570	1-208-935-81	s	RES, CHIP 100K (1005)
R571	1-208-911-81	s	RES, CHIP 10K (1005)
R572	1-208-911-81	s	RES, CHIP 10K (1005)
R573	1-208-935-81	s	RES, CHIP 100K (1005)
R580	1-208-919-81	s	RES, CHIP 22K (1005)
R581	1-208-919-81	s	RES, CHIP 22K (1005)
R582	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R583	1-208-911-81	s	RES, CHIP 10K (1005)
R584	1-208-911-81	s	RES, CHIP 10K (1005)
R585	1-208-863-81	s	RES, CHIP 100 (1005)
R586	1-208-919-81	s	RES, CHIP 22K (1005)
R587	1-208-919-81	s	RES, CHIP 22K (1005)
R588	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R589	1-208-911-81	s	RES, CHIP 10K (1005)
R590	1-208-911-81	s	RES, CHIP 10K (1005)
R591	1-208-863-81	s	RES, CHIP 100 (1005)
R594	1-216-813-91	s	RES, CHIP 220 (1608)
R596	1-216-813-91	s	RES, CHIP 220 (1608)
R598	1-216-813-91	s	RES, CHIP 220 (1608)
R599	1-216-813-91	s	RES, CHIP 220 (1608)
R600	1-208-863-81	s	RES, CHIP 100 (1005)
R601	1-208-863-81	s	RES, CHIP 100 (1005)
R602	1-220-870-81	s	RES, CHIP 10 (1005)
R603	1-208-915-81	s	RES, CHIP 15K (1005)
R604	1-208-915-81	s	RES, CHIP 15K (1005)
R605	1-208-915-81	s	RES, CHIP 15K (1005)
R606	1-208-915-81	s	RES, CHIP 15K (1005)
R607	1-208-919-81	s	RES, CHIP 22K (1005)
R608	1-208-919-81	s	RES, CHIP 22K (1005)
R609	1-208-863-81	s	RES, CHIP 100 (1005)
R610	1-208-919-81	s	RES, CHIP 22K (1005)
R611	1-208-919-81	s	RES, CHIP 22K (1005)
R612	1-208-863-81	s	RES, CHIP 100 (1005)
R613	1-208-919-81	s	RES, CHIP 22K (1005)
R614	1-208-919-81	s	RES, CHIP 22K (1005)
R615	1-208-863-81	s	RES, CHIP 100 (1005)
R616	1-208-863-81	s	RES, CHIP 100 (1005)
R617	1-208-919-81	s	RES, CHIP 22K (1005)
R618	1-208-919-81	s	RES, CHIP 22K (1005)
R619	1-208-919-81	s	RES, CHIP 22K (1005)
R620	1-208-919-81	s	RES, CHIP 22K (1005)
R621	1-208-927-81	s	RES, CHIP 47K (1005)
R622	1-208-927-81	s	RES, CHIP 47K (1005)
R623	1-208-919-81	s	RES, CHIP 22K (1005)
R624	1-208-919-81	s	RES, CHIP 22K (1005)
R625	1-208-911-81	s	RES, CHIP 10K (1005)
R626	1-208-911-81	s	RES, CHIP 10K (1005)
R627	1-208-911-81	s	RES, CHIP 10K (1005)
R628	1-208-911-81	s	RES, CHIP 10K (1005)

(AVP-6 BOARD suffix 12, 31)

Ref. No. or Q'ty	Part No.	SP	Description
R629	1-208-903-81	s	RES, CHIP 4.7K (1005)
R630	1-208-903-81	s	RES, CHIP 4.7K (1005)
R631	1-208-903-81	s	RES, CHIP 4.7K (1005)
R632	1-208-903-81	s	RES, CHIP 4.7K (1005)
R633	1-208-911-81	s	RES, CHIP 10K (1005)
R634	1-208-911-81	s	RES, CHIP 10K (1005)
R635	1-208-923-81	s	RES, CHIP 33K (1005)
R636	1-208-923-81	s	RES, CHIP 33K (1005)
R637	1-208-919-81	s	RES, CHIP 22K (1005)
R638	1-208-863-81	s	RES, CHIP 100 (1005)
R639	1-208-919-81	s	RES, CHIP 22K (1005)
R640	1-208-863-81	s	RES, CHIP 100 (1005)
R641	1-208-923-81	s	RES, CHIP 33K (1005)
R642	1-208-923-81	s	RES, CHIP 33K (1005)
R643	1-208-919-81	s	RES, CHIP 22K (1005)
R644	1-208-919-81	s	RES, CHIP 22K (1005)
R645	1-208-911-81	s	RES, CHIP 10K (1005)
R646	1-208-919-81	s	RES, CHIP 22K (1005)
R647	1-208-919-81	s	RES, CHIP 22K (1005)
R648	1-208-911-81	s	RES, CHIP 10K (1005)
R649	1-208-919-81	s	RES, CHIP 22K (1005)
R650	1-208-919-81	s	RES, CHIP 22K (1005)
R651	1-208-863-81	s	RES, CHIP 100 (1005)
R652	1-208-911-81	s	RES, CHIP 10K (1005)
R653	1-208-863-81	s	RES, CHIP 100 (1005)
R654	1-208-935-81	s	RES, CHIP 100K (1005)
R655	1-208-935-81	s	RES, CHIP 100K (1005)
R656	1-208-911-81	s	RES, CHIP 10K (1005)
R657	1-208-911-81	s	RES, CHIP 10K (1005)
R658	1-208-935-81	s	RES, CHIP 100K (1005)
R659	1-208-935-81	s	RES, CHIP 100K (1005)
R660	1-208-919-81	s	RES, CHIP 22K (1005)
R661	1-208-911-81	s	RES, CHIP 10K (1005)
R662	1-208-911-81	s	RES, CHIP 10K (1005)
R663	1-208-911-81	s	RES, CHIP 10K (1005)
R664	1-208-919-81	s	RES, CHIP 22K (1005)
R665	1-208-863-81	s	RES, CHIP 100 (1005)
R666	1-208-911-81	s	RES, CHIP 10K (1005)
R667	1-208-911-81	s	RES, CHIP 10K (1005)
R668	1-208-863-81	s	RES, CHIP 100 (1005)
R669	1-208-911-81	s	RES, CHIP 10K (1005)
R670	1-208-911-81	s	RES, CHIP 10K (1005)
R671	1-208-927-81	s	RES, CHIP 47K (1005)
R672	1-208-911-81	s	RES, CHIP 10K (1005)
R673	1-208-911-81	s	RES, CHIP 10K (1005)
R674	1-208-927-81	s	RES, CHIP 47K (1005)
R675	1-208-911-81	s	RES, CHIP 10K (1005)
R676	1-208-911-81	s	RES, CHIP 10K (1005)
R677	1-208-911-81	s	RES, CHIP 10K (1005)
R678	1-208-911-81	s	RES, CHIP 10K (1005)
R679	1-208-927-81	s	RES, CHIP 47K (1005)
R680	1-208-927-81	s	RES, CHIP 47K (1005)
R681	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R682	1-216-813-91	s	RES, CHIP 220 (1608)
R683	1-216-813-91	s	RES, CHIP 220 (1608)
R684	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R685	1-216-813-91	s	RES, CHIP 220 (1608)
R686	1-216-813-91	s	RES, CHIP 220 (1608)
R687	1-208-933-81	s	RES, CHIP 82K (1005)

(AVP-6 BOARD suffix 12, 31)

Ref. No. or Q'ty	Part No.	SP	Description
R688	1-208-933-81	s	RES, CHIP 82K (1005)
R689	1-208-891-81	s	RES, CHIP 1.5K (1005)
R690	1-208-891-81	s	RES, CHIP 1.5K (1005)
R691	1-208-911-81	s	RES, CHIP 10K (1005)
R692	1-208-903-81	s	RES, CHIP 4.7K (1005)
R693	1-208-911-81	s	RES, CHIP 10K (1005)
R694	1-208-903-81	s	RES, CHIP 4.7K (1005)
R695	1-208-919-81	s	RES, CHIP 22K (1005)
R696	1-208-919-81	s	RES, CHIP 22K (1005)
R697	1-208-919-81	s	RES, CHIP 22K (1005)
R698	1-208-919-81	s	RES, CHIP 22K (1005)
R699	1-208-911-81	s	RES, CHIP 10K (1005)
R700	1-208-911-81	s	RES, CHIP 10K (1005)
R701	1-208-911-81	s	RES, CHIP 10K (1005)
R702	1-208-911-81	s	RES, CHIP 10K (1005)
R703	1-208-895-81	s	RES, CHIP 2.2K (1005)
R704	1-208-895-81	s	RES, CHIP 2.2K (1005)
R705	1-208-895-81	s	RES, CHIP 2.2K (1005)
R706	1-208-895-81	s	RES, CHIP 2.2K (1005)
R707	1-208-927-81	s	RES, CHIP 47K (1005)
R708	1-208-927-81	s	RES, CHIP 47K (1005)
R709	1-208-919-81	s	RES, CHIP 22K (1005)
R710	1-208-919-81	s	RES, CHIP 22K (1005)
R711	1-208-911-81	s	RES, CHIP 10K (1005)
R712	1-208-911-81	s	RES, CHIP 10K (1005)
R713	1-208-911-81	s	RES, CHIP 10K (1005)
R714	1-208-911-81	s	RES, CHIP 10K (1005)
R715	1-208-903-81	s	RES, CHIP 4.7K (1005)
R716	1-208-903-81	s	RES, CHIP 4.7K (1005)
R717	1-208-903-81	s	RES, CHIP 4.7K (1005)
R718	1-208-903-81	s	RES, CHIP 4.7K (1005)
R719	1-208-919-81	s	RES, CHIP 22K (1005)
R720	1-208-919-81	s	RES, CHIP 22K (1005)
R721	1-208-919-81	s	RES, CHIP 22K (1005)
R722	1-208-919-81	s	RES, CHIP 22K (1005)
R723	1-208-919-81	s	RES, CHIP 22K (1005)
R724	1-208-919-81	s	RES, CHIP 22K (1005)
R725	1-208-861-81	s	RES, CHIP 82 (1005)
R726	1-208-919-81	s	RES, CHIP 22K (1005)
R727	1-208-861-81	s	RES, CHIP 82 (1005)
R728	1-208-919-81	s	RES, CHIP 22K (1005)
R729	1-220-870-81	s	RES, CHIP 10 (1005)
R730	1-220-870-81	s	RES, CHIP 10 (1005)
R731	1-220-870-81	s	RES, CHIP 10 (1005)
R732	1-220-870-81	s	RES, CHIP 10 (1005)
R733	1-208-935-81	s	RES, CHIP 100K (1005)
R734	1-208-935-81	s	RES, CHIP 100K (1005)
R735	1-208-935-81	s	RES, CHIP 100K (1005)
R736	1-208-935-81	s	RES, CHIP 100K (1005)
R737	1-208-919-81	s	RES, CHIP 22K (1005)
R738	1-208-919-81	s	RES, CHIP 22K (1005)
R739	1-208-887-81	s	RES, CHIP 1.0K (1005)
R740	1-208-915-81	s	RES, CHIP 15K (1005)
R741	1-208-915-81	s	RES, CHIP 15K (1005)
R742	1-208-863-81	s	RES, CHIP 100 (1005)
R743	1-208-919-81	s	RES, CHIP 22K (1005)
R744	1-208-919-81	s	RES, CHIP 22K (1005)
R745	1-208-887-81	s	RES, CHIP 1.0K (1005)
R746	1-208-915-81	s	RES, CHIP 15K (1005)

(AVP-6 BOARD suffix 12, 31)

Ref. No. or Q'ty	Part No.	SP	Description
R747	1-208-915-81	s	RES, CHIP 15K (1005)
R748	1-208-863-81	s	RES, CHIP 100 (1005)
R749	1-208-923-81	s	RES, CHIP 33K (1005)
R750	1-208-923-81	s	RES, CHIP 33K (1005)
R751	1-208-887-81	s	RES, CHIP 1.0K (1005)
R752	1-208-887-81	s	RES, CHIP 1.0K (1005)
R753	1-208-887-81	s	RES, CHIP 1.0K (1005)
R754	1-208-899-81	s	RES, CHIP 3.3K (1005)
R755	1-208-899-81	s	RES, CHIP 3.3K (1005)
R756	1-208-899-81	s	RES, CHIP 3.3K (1005)
R757	1-208-915-81	s	RES, CHIP 15K (1005)
R758	1-208-915-81	s	RES, CHIP 15K (1005)
R759	1-208-915-81	s	RES, CHIP 15K (1005)
R760	1-208-887-81	s	RES, CHIP 1.0K (1005)
R761	1-208-895-81	s	RES, CHIP 2.2K (1005)
R762	1-208-927-81	s	RES, CHIP 47K (1005)
R763	1-208-887-81	s	RES, CHIP 1.0K (1005)
R764	1-208-895-81	s	RES, CHIP 2.2K (1005)
R765	1-208-927-81	s	RES, CHIP 47K (1005)
R766	1-208-887-81	s	RES, CHIP 1.0K (1005)
R767	1-208-895-81	s	RES, CHIP 2.2K (1005)
R768	1-208-927-81	s	RES, CHIP 47K (1005)
R769	1-208-915-81	s	RES, CHIP 15K (1005)
R770	1-208-915-81	s	RES, CHIP 15K (1005)
R771	1-208-915-81	s	RES, CHIP 15K (1005)
R772	1-208-887-81	s	RES, CHIP 1.0K (1005)
R773	1-208-887-81	s	RES, CHIP 1.0K (1005)
R774	1-208-887-81	s	RES, CHIP 1.0K (1005)
R775	1-208-927-81	s	RES, CHIP 47K (1005)
R776	1-208-927-81	s	RES, CHIP 47K (1005)
R777	1-208-927-81	s	RES, CHIP 47K (1005)
R778	1-208-903-81	s	RES, CHIP 4.7K (1005)
R779	1-208-911-81	s	RES, CHIP 10K (1005)
R780	1-208-911-81	s	RES, CHIP 10K (1005)
R781	1-208-903-81	s	RES, CHIP 4.7K (1005)
R782	1-208-911-81	s	RES, CHIP 10K (1005)
R783	1-208-911-81	s	RES, CHIP 10K (1005)
R784	1-208-903-81	s	RES, CHIP 4.7K (1005)
R785	1-208-911-81	s	RES, CHIP 10K (1005)
R786	1-208-855-81	s	RES, CHIP 47 (1005)
R787	1-208-855-81	s	RES, CHIP 47 (1005)
R788	1-208-903-81	s	RES, CHIP 4.7K (1005)
R789	1-208-903-81	s	RES, CHIP 4.7K (1005)
R790	1-208-903-81	s	RES, CHIP 4.7K (1005)
R791	1-208-911-81	s	RES, CHIP 10K (1005)
R792	1-208-911-81	s	RES, CHIP 10K (1005)
R793	1-208-911-81	s	RES, CHIP 10K (1005)
R794	1-208-911-81	s	RES, CHIP 10K (1005)
R795	1-208-923-81	s	RES, CHIP 33K (1005)
R796	1-208-923-81	s	RES, CHIP 33K (1005)
R797	1-208-887-81	s	RES, CHIP 1.0K (1005)
R798	1-208-887-81	s	RES, CHIP 1.0K (1005)
R799	1-208-887-81	s	RES, CHIP 1.0K (1005)
R800	1-208-887-81	s	RES, CHIP 1.0K (1005)
R801	1-208-887-81	s	RES, CHIP 1.0K (1005)
R802	1-208-923-81	s	RES, CHIP 33K (1005)
R803	1-208-923-81	s	RES, CHIP 33K (1005)
R804	1-208-887-81	s	RES, CHIP 1.0K (1005)
R805	1-208-887-81	s	RES, CHIP 1.0K (1005)

(AVP-6 BOARD suffix 12, 31)

Ref. No. or Q'ty	Part No.	SP	Description
R806	1-208-903-81	s	RES, CHIP 4.7K (1005)
R807	1-208-911-81	s	RES, CHIP 10K (1005)
R808	1-244-161-81	s	RES, CHIP 2.2 (1005)
R809	1-244-161-81	s	RES, CHIP 2.2 (1005)
R810	1-244-161-81	s	RES, CHIP 2.2 (1005)
R999	1-208-863-81	s	RES, CHIP 100 (1005)
R1003	1-216-813-91	s	RES, CHIP 220 (1608)
R1004	1-216-813-91	s	RES, CHIP 220 (1608)
R1005	1-216-813-91	s	RES, CHIP 220 (1608)
R1006	1-216-813-91	s	RES, CHIP 220 (1608)
RB102	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB103	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB104	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB105	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB200	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB201	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB202	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB203	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB204	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB205	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB206	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB207	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB208	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB209	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB210	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB211	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB212	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB213	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB214	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB215	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB216	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB217	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB218	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB219	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB300	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB301	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB302	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB303	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB304	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB305	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB306	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB307	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB308	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB309	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB310	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB311	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB312	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB313	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB314	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB315	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB316	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB400	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB501	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB502	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB601	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RV500	1-225-793-21	s	RES, ADJ, CERMET 20K
RV501	1-225-793-21	s	RES, ADJ, CERMET 20K
RV600	1-241-264-41	s	RES, ADJ, CERMET 10K
RV601	1-241-264-41	s	RES, ADJ, CERMET 10K

(AVP-6 BOARD suffix 12, 31)

Ref. No. or Q'ty	Part No.	SP	Description
S1	1-762-775-21	s	SWITCH, TOGGLE
S4	1-692-271-41	s	SWITCH, SLIDE
S11	1-570-711-33	s	SWITCH, SLIDE
S12	1-570-711-33	s	SWITCH, SLIDE
S21	1-570-711-33	s	SWITCH, SLIDE
S22	1-570-711-33	s	SWITCH, SLIDE
S31	1-570-711-33	s	SWITCH, SLIDE
S32	1-570-711-33	s	SWITCH, SLIDE
S500	1-570-711-33	s	SWITCH, SLIDE
S501	1-570-711-33	s	SWITCH, SLIDE
S502	1-570-711-33	s	SWITCH, SLIDE
S503	1-570-711-33	s	SWITCH, SLIDE
S600	1-570-711-33	s	SWITCH, SLIDE
S601	1-570-711-33	s	SWITCH, SLIDE
S602	1-570-711-33	s	SWITCH, SLIDE
S603	1-570-711-33	s	SWITCH, SLIDE
T700	1-443-158-11	s	TRANSFORMER, DC-DC CONVERTER
T701	1-443-158-11	s	TRANSFORMER, DC-DC CONVERTER
THP100 ⚠	1-803-615-21	s	THERMISTOR, POSITIVE
THP101 ⚠	1-803-615-21	s	THERMISTOR, POSITIVE
THP102 ⚠	1-804-616-21	s	THERMISTOR, POSITIVE
THP103 ⚠	1-804-458-21	s	THERMISTOR, POSITIVE
THP104 ⚠	1-804-616-21	s	THERMISTOR, POSITIVE
THP105 ⚠	1-804-616-21	s	THERMISTOR, POSITIVE
THP106 ⚠	1-804-616-21	s	THERMISTOR, POSITIVE
TP300	1-535-877-22	s	CHIP, CHECKER
TP301	1-535-877-22	s	CHIP, CHECKER
TP302	1-535-877-22	s	CHIP, CHECKER
TP400	1-535-877-22	s	CHIP, CHECKER
TP401	1-535-877-22	s	CHIP, CHECKER
TP402	1-535-877-22	s	CHIP, CHECKER
TP403	1-535-877-22	s	CHIP, CHECKER
TP404	1-535-877-22	s	CHIP, CHECKER
TP405	1-535-877-22	s	CHIP, CHECKER
TP500	1-535-877-22	s	CHIP, CHECKER
TP501	1-535-877-22	s	CHIP, CHECKER
TP502	1-535-877-22	s	CHIP, CHECKER
TP503	1-535-877-22	s	CHIP, CHECKER
TP504	1-535-877-22	s	CHIP, CHECKER
TP505	1-535-877-22	s	CHIP, CHECKER
TP600	1-535-877-22	s	CHIP, CHECKER
TP601	1-535-877-22	s	CHIP, CHECKER
X300	1-813-253-12	s	OSCILLATOR, CRYSTAL (VCXO) 5V

AVP-6 BOARD (suffix 11)

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1129-300-A	s	MOUNTED CIRCUIT BOARD, AVP-6
4pcs	7-682-947-01	s	SCREW +PSW 3X6
C100	1-100-505-11	s	CAPACITOR,CERAMIC 0.1MF B 1005
C101	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3216
C102	1-127-573-11	s	CAPACITOR,CERAMIC 1MFB(2012)
C103	1-127-573-11	s	CAPACITOR,CERAMIC 1MFB(2012)
C104	1-127-573-11	s	CAPACITOR,CERAMIC 1MFB(2012)
C105	1-127-573-11	s	CAPACITOR,CERAMIC 1MFB(2012)
C106	1-127-573-11	s	CAPACITOR,CERAMIC 1MFB(2012)
C107	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C108	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C109	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C110	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C111	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C112	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3216
C113	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C114	1-100-505-11	s	CAPACITOR,CERAMIC 0.1MF B 1005
C115	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C116	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C117	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C118	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C119	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C120	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C121	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3216
C123	1-127-573-11	s	CAPACITOR,CERAMIC 1MFB(2012)
C124	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C125	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C126	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C127	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C129	1-127-573-11	s	CAPACITOR,CERAMIC 1MFB(2012)
C130	1-119-923-11	s	CAPACITOR,CHIP CERAMIC 0.047MF
C131	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C132	1-127-573-11	s	CAPACITOR,CERAMIC 1MFB(2012)
C133	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C134	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C135	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C136	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C137	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C138	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C139	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C140	1-119-923-11	s	CAPACITOR,CHIP CERAMIC 0.047MF
C141	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C143	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C144	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C145	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C146	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C147	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C148	1-107-819-11	s	CAP,CERAMIC 22000PF/16V(1005)
C149	1-164-936-11	s	CAPACITOR,CHIP CERAMIC 680PF
C150	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C151	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C152	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C153	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C154	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C155	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C156	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3216
C157	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C158	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF

(AVP-6 BOARD suffix 11)

Ref. No. or Q'ty	Part No.	SP	Description
C159	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C160	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C161	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C162	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C163	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C164	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C165	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C166	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C167	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C168	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C169	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C170	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C171	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C172	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C173	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C174	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C175	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C176	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C177	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C178	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C179	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C200	1-100-505-11	s	CAPACITOR,CERAMIC 0.1MF B 1005
C201	1-100-505-11	s	CAPACITOR,CERAMIC 0.1MF B 1005
C202	1-100-505-11	s	CAPACITOR,CERAMIC 0.1MF B 1005
C203	1-100-505-11	s	CAPACITOR,CERAMIC 0.1MF B 1005
C204	1-100-505-11	s	CAPACITOR,CERAMIC 0.1MF B 1005
C205	1-100-505-11	s	CAPACITOR,CERAMIC 0.1MF B 1005
C206	1-100-505-11	s	CAPACITOR,CERAMIC 0.1MF B 1005
C207	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C208	1-100-505-11	s	CAPACITOR,CERAMIC 0.1MF B 1005
C300	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C301	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C302	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C303	1-100-505-11	s	CAPACITOR,CERAMIC 0.1MF B 1005
C304	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C305	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C306	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C307	1-100-505-11	s	CAPACITOR,CERAMIC 0.1MF B 1005
C308	1-164-858-11	s	CAPACITOR,CERAMIC 22PF/50V
C309	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C310	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C311	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C312	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C313	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C314	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C315	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C316	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C317	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C318	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C319	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C320	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C321	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C322	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C323	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C324	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C325	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C326	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C327	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C328	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)

(AVP-6 BOARD suffix 11)

Ref. No. or Q'ty	Part No.	SP	Description
C329	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C330	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C331	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C332	1-100-505-11	s	CAPACITOR,CERAMIC 0.1MF B 1005
C333	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C334	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C335	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C336	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C337	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C338	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C339	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C340	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C341	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C342	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C343	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C344	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C345	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C346	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C347	1-100-505-11	s	CAPACITOR,CERAMIC 0.1MF B 1005
C348	1-127-573-11	s	CAPACITOR,CERAMIC 1MFB(2012)
C349	1-164-854-11	s	CAPACITOR,CHIP CERAMIC 15PF/50
C350	1-100-505-11	s	CAPACITOR,CERAMIC 0.1MF B 1005
C351	1-100-505-11	s	CAPACITOR,CERAMIC 0.1MF B 1005
C352	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C353	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C354	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C355	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C356	1-100-505-11	s	CAPACITOR,CERAMIC 0.1MF B 1005
C357	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C358	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C359	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C360	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C361	1-100-505-11	s	CAPACITOR,CERAMIC 0.1MF B 1005
C362	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C363	1-100-505-11	s	CAPACITOR,CERAMIC 0.1MF B 1005
C364	1-127-573-11	s	CAPACITOR,CERAMIC 1MFB(2012)
C365	1-164-854-11	s	CAPACITOR,CHIP CERAMIC 15PF/50
C366	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C367	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C368	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C369	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C400	1-164-850-11	s	CAPACITOR,CHIP CERAMIC 10PF/50
C402	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C403	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C404	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C405	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C406	1-165-884-91	s	CAPACITOR, CERAMIC 2.2MF(1608)
C407	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C408	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C409	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C410	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C411	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C412	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C413	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C414	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C415	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C416	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C417	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C418	1-164-935-11	s	CAPACITOR,CHIP CERAMIC 470PF

(AVP-6 BOARD suffix 11)

Ref. No. or Q'ty	Part No.	SP	Description
C419	1-165-884-91	s	CAPACITOR, CERAMIC 2.2MF(1608)
C420	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C421	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C422	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C425	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C426	1-164-935-11	s	CAPACITOR,CHIP CERAMIC 470PF
C428	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C429	1-164-935-11	s	CAPACITOR,CHIP CERAMIC 470PF
C430	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C431	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C432	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C433	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C434	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3216
C435	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3216
C436	1-164-315-11	s	CAPACITOR,CERAMIC 470PF/50V CH
C438	1-164-935-11	s	CAPACITOR,CHIP CERAMIC 470PF
C439	1-162-966-11	s	CAPACITOR,CERAMIC 2200PF/50V B
C440	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C441	1-107-781-11	s	CAPACITOR,ELECT 47MF/16V(BP)
C443	1-107-781-11	s	CAPACITOR,ELECT 47MF/16V(BP)
C445	1-100-505-11	s	CAPACITOR,CERAMIC 0.1MF B 1005
C446	1-100-505-11	s	CAPACITOR,CERAMIC 0.1MF B 1005
C447	1-117-142-21	s	CAPACITOR, ELECT 0.22MF
C448	1-107-781-11	s	CAPACITOR,ELECT 47MF/16V(BP)
C450	1-117-142-21	s	CAPACITOR, ELECT 0.22MF
C451	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C453	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C454	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C455	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C456	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C502	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C503	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C504	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C505	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C506	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C507	1-165-884-91	s	CAPACITOR, CERAMIC 2.2MF(1608)
C508	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C509	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C510	1-165-884-91	s	CAPACITOR, CERAMIC 2.2MF(1608)
C511	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C512	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C513	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3216
C514	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C515	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C516	1-164-935-11	s	CAPACITOR,CHIP CERAMIC 470PF
C517	1-164-935-11	s	CAPACITOR,CHIP CERAMIC 470PF
C518	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C519	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C520	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C521	1-164-858-11	s	CAPACITOR,CERAMIC 22PF/50V
C522	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C523	1-164-858-11	s	CAPACITOR,CERAMIC 22PF/50V
C524	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C525	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C526	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C527	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C528	1-100-581-81	s	CHIP CERAMIC0.0047MF B1005
C529	1-100-581-81	s	CHIP CERAMIC0.0047MF B1005
C530	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V

(AVP-6 BOARD suffix 11)

Ref. No. or Q'ty	Part No.	SP	Description
C531	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C532	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C533	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C534	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C535	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C536	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C538	1-164-935-11	s	CAPACITOR,CHIP CERAMIC 470PF
C539	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C541	1-164-935-11	s	CAPACITOR,CHIP CERAMIC 470PF
C542	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C543	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C546	1-164-850-11	s	CAPACITOR,CHIP CERAMIC 10PF/50
C547	1-164-850-11	s	CAPACITOR,CHIP CERAMIC 10PF/50
C552	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C553	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C554	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C555	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C600	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C601	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C602	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C603	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C604	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C605	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C606	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C607	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C608	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C609	1-165-884-91	s	CAPACITOR, CERAMIC 2.2MF(1608)
C610	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C611	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C612	1-164-935-11	s	CAPACITOR,CHIP CERAMIC 470PF
C613	1-164-935-11	s	CAPACITOR,CHIP CERAMIC 470PF
C614	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C615	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C616	1-100-505-11	s	CAPACITOR,CERAMIC 0.1MF B 1005
C617	1-100-505-11	s	CAPACITOR,CERAMIC 0.1MF B 1005
C618	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C619	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C620	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C621	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C622	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C623	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C624	1-100-505-11	s	CAPACITOR,CERAMIC 0.1MF B 1005
C625	1-100-505-11	s	CAPACITOR,CERAMIC 0.1MF B 1005
C626	1-127-573-11	s	CAPACITOR,CERAMIC 1MFB(2012)
C627	1-127-573-11	s	CAPACITOR,CERAMIC 1MFB(2012)
C628	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C629	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C630	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C631	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C632	1-107-781-11	s	CAPACITOR,ELECT 47MF/16V(BP)
C633	1-107-781-11	s	CAPACITOR,ELECT 47MF/16V(BP)
C634	1-107-781-11	s	CAPACITOR,ELECT 47MF/16V(BP)
C635	1-107-781-11	s	CAPACITOR,ELECT 47MF/16V(BP)
C636	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3216
C637	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3216
C640	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C641	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C642	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C643	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)

(AVP-6 BOARD suffix 11)

Ref. No. or Q'ty	Part No.	SP	Description
C644	1-165-467-21	s	CAPACITOR ELECT 47MF 63V
C645	1-165-467-21	s	CAPACITOR ELECT 47MF 63V
C646	1-165-467-21	s	CAPACITOR ELECT 47MF 63V
C647	1-165-467-21	s	CAPACITOR ELECT 47MF 63V
C648	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C649	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C650	1-164-935-11	s	CAPACITOR,CHIP CERAMIC 470PF
C651	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C652	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C653	1-164-935-11	s	CAPACITOR,CHIP CERAMIC 470PF
C654	1-164-850-11	s	CAPACITOR,CHIP CERAMIC 10PF/50
C655	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C656	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C700	1-107-819-11	s	CAP,CERAMIC 22000PF/16V(1005)
C701	1-107-819-11	s	CAP,CERAMIC 22000PF/16V(1005)
C702	1-107-819-11	s	CAP,CERAMIC 22000PF/16V(1005)
C703	1-107-819-11	s	CAP,CERAMIC 22000PF/16V(1005)
C704	1-107-819-11	s	CAP,CERAMIC 22000PF/16V(1005)
C705	1-107-819-11	s	CAP,CERAMIC 22000PF/16V(1005)
C706	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C707	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C708	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C709	1-100-581-81	s	CHIP CERAMIC0.0047MF B1005
C710	1-100-581-81	s	CHIP CERAMIC0.0047MF B1005
C711	1-100-581-81	s	CHIP CERAMIC0.0047MF B1005
C712	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C713	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C714	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C715	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C716	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C717	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C718	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C719	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C720	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C721	1-100-581-81	s	CHIP CERAMIC0.0047MF B1005
C722	1-100-581-81	s	CHIP CERAMIC0.0047MF B1005
C723	1-164-940-11	s	CAPACITOR,CHIP CERAMIC 3300/16
C724	1-164-940-11	s	CAPACITOR,CHIP CERAMIC 3300/16
C725	1-164-940-11	s	CAPACITOR,CHIP CERAMIC 3300/16
C726	1-164-940-11	s	CAPACITOR,CHIP CERAMIC 3300/16
C727	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
CN3	1-764-093-21	o	PIN, CONNECTOR (PC BOARD) 8P
D100	8-719-017-03	s	DIODE 02DZ4.7-TPH3
D101	8-719-017-03	s	DIODE 02DZ4.7-TPH3
D102	8-719-017-03	s	DIODE 02DZ4.7-TPH3
D103	8-719-017-03	s	DIODE 02DZ4.7-TPH3
D104	8-719-063-83	s	LED SML-510MWT86
D105	8-719-063-83	s	LED SML-510MWT86
D106	8-719-063-83	s	LED SML-510MWT86
D107	8-719-064-41	s	DIODE CL-191Y-CD-T
D400	8-719-421-27	s	DIODE MA728
D401	8-719-421-27	s	DIODE MA728
D402	8-719-421-27	s	DIODE MA728
D403	8-719-421-27	s	DIODE MA728
D404	8-719-016-84	s	DIODE 02DZ2.0-TPH3
D405	8-719-016-84	s	DIODE 02DZ2.0-TPH3
D406	8-719-421-27	s	DIODE MA728

(AVP-6 BOARD suffix 11)

Ref. No. or Q'ty	Part No.	SP	Description
D407	8-719-421-27	s	DIODE MA728
D408	8-719-016-84	s	DIODE 02DZ2.0-TPH3
D409	8-719-016-84	s	DIODE 02DZ2.0-TPH3
D410	8-719-016-84	s	DIODE 02DZ2.0-TPH3
D411	8-719-016-84	s	DIODE 02DZ2.0-TPH3
D500	8-719-421-27	s	DIODE MA728
D501	8-719-421-27	s	DIODE MA728
D502	8-719-421-27	s	DIODE MA728
D503	8-719-421-27	s	DIODE MA728
D504	8-719-016-84	s	DIODE 02DZ2.0-TPH3
D505	8-719-016-84	s	DIODE 02DZ2.0-TPH3
D506	8-719-016-84	s	DIODE 02DZ2.0-TPH3
D507	8-719-016-84	s	DIODE 02DZ2.0-TPH3
D600	8-719-421-27	s	DIODE MA728
D601	8-719-421-27	s	DIODE MA728
D602	8-719-421-27	s	DIODE MA728
D603	8-719-421-27	s	DIODE MA728
D604	8-719-016-84	s	DIODE 02DZ2.0-TPH3
D605	8-719-016-84	s	DIODE 02DZ2.0-TPH3
D606	8-719-016-84	s	DIODE 02DZ2.0-TPH3
D607	8-719-016-84	s	DIODE 02DZ2.0-TPH3
D700	8-719-024-81	s	DIODE 1SS300-TE85L
D701	8-719-024-81	s	DIODE 1SS300-TE85L
D702	8-719-024-81	s	DIODE 1SS300-TE85L
D703	8-719-801-78	s	DIODE 1SS184
D704	8-719-801-78	s	DIODE 1SS184
D705	8-719-801-78	s	DIODE 1SS184
D706	8-719-420-90	s	DIODE MA8051-M
D707	8-719-420-90	s	DIODE MA8051-M
D708	8-719-420-90	s	DIODE MA8051-M
D709	8-719-801-78	s	DIODE 1SS184
D710	8-719-801-78	s	DIODE 1SS184
D711	8-719-801-78	s	DIODE 1SS184
D712	8-719-024-81	s	DIODE 1SS300-TE85L
D713	8-719-024-81	s	DIODE 1SS300-TE85L
D714	8-719-024-81	s	DIODE 1SS300-TE85L
D715	8-719-016-84	s	DIODE 02DZ2.0-TPH3
D716	8-719-024-81	s	DIODE 1SS300-TE85L
D717	8-719-024-81	s	DIODE 1SS300-TE85L
D718	8-719-801-78	s	DIODE 1SS184
D719	8-719-801-78	s	DIODE 1SS184
E1	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
E2	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
E3	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
E4	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
FB100	1-469-094-21	s	FERRITE, EMI (SMD)
FB101	1-469-094-21	s	FERRITE, EMI (SMD)
IC100	8-759-327-01	s	IC NJM062V-TE2
IC101	8-759-327-01	s	IC NJM062V-TE2
IC102	8-759-338-95	s	IC NJM2903V (TE2)
IC103	8-759-338-95	s	IC NJM2903V (TE2)
IC104	6-701-572-01	s	IC TPS54610PWPR
IC105	8-759-327-01	s	IC NJM062V-TE2
IC106	6-704-976-01	s	IC ADR381ART-REEL7
IC107	8-759-471-96	s	IC 74VHC08MTCX
IC108	8-759-648-61	s	IC LTC1387CG
IC109	8-759-648-61	s	IC LTC1387CG

(AVP-6 BOARD suffix 11)

Ref. No. or Q'ty	Part No.	SP	Description
IC200	8-759-392-77	s	IC SN74LVC245APW (E20)
IC201	8-759-392-77	s	IC SN74LVC245APW (E20)
IC202	8-759-392-77	s	IC SN74LVC245APW (E20)
IC203	8-759-472-18	s	IC 74VHC138MTCX
IC204	8-759-363-26	s	IC RN5VD28AA-TL
IC205	6-706-489-01	s	IC TC7SH32FU(T5RSOYJF)
IC206	8-752-392-03	s	IC CXD1095BR
IC207	8-759-471-96	s	IC 74VHC08MTCX
IC300	6-704-463-01	s	IC CY7C1021CV33-15ZXCT
IC301	8-759-485-24	s	IC MC74HC4046ADT (R2)
IC303	8-759-669-66	s	IC TLC272CPWR
IC304	8-759-592-44	s	IC TC7SZ04FU(TE85R)
IC305	8-759-471-96	s	IC 74VHC08MTCX
IC308	8-759-392-77	s	IC SN74LVC245APW (E20)
IC309	8-759-392-77	s	IC SN74LVC245APW (E20)
IC311	8-759-561-46	s	IC AD8014ART-REEL7
IC312	8-759-392-77	s	IC SN74LVC245APW (E20)
IC313	8-759-392-77	s	IC SN74LVC245APW (E20)
IC314	8-759-392-77	s	IC SN74LVC245APW (E20)
IC315	8-759-392-77	s	IC SN74LVC245APW (E20)
IC316	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC317	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC318	8-759-524-27	s	IC TC74VHC244FT(EL)
IC319	8-759-441-31	s	IC MC14053BDTR2
IC320	8-759-561-46	s	IC AD8014ART-REEL7
IC321	8-759-592-44	s	IC TC7SZ04FU(TE85R)
IC401	6-700-563-01	s	IC AK4552VT-E2
IC402	6-700-563-01	s	IC AK4552VT-E2
IC403	8-759-278-58	s	IC NJM4558V (TE2)
IC404	8-759-441-31	s	IC MC14053BDTR2
IC405	8-759-278-58	s	IC NJM4558V (TE2)
IC406	8-759-422-21	s	IC NJM4580VTE2
IC407	8-759-422-21	s	IC NJM4580VTE2
IC409	8-759-278-58	s	IC NJM4558V (TE2)
IC410	8-759-278-58	s	IC NJM4558V (TE2)
IC500	6-700-563-01	s	IC AK4552VT-E2
IC501	6-700-563-01	s	IC AK4552VT-E2
IC502	8-759-278-58	s	IC NJM4558V (TE2)
IC503	8-759-278-58	s	IC NJM4558V (TE2)
IC504	8-759-278-58	s	IC NJM4558V (TE2)
IC505	8-759-422-21	s	IC NJM4580VTE2
IC506	8-759-422-21	s	IC NJM4580VTE2
IC507	8-759-278-58	s	IC NJM4558V (TE2)
IC508	8-759-278-58	s	IC NJM4558V (TE2)
IC600	6-700-563-01	s	IC AK4552VT-E2
IC601	8-759-278-58	s	IC NJM4558V (TE2)
IC602	8-759-278-58	s	IC NJM4558V (TE2)
IC603	8-759-278-58	s	IC NJM4558V (TE2)
IC604	8-759-278-58	s	IC NJM4558V (TE2)
IC605	8-759-441-31	s	IC MC14053BDTR2
IC606	8-759-441-31	s	IC MC14053BDTR2
IC607	8-759-422-21	s	IC NJM4580VTE2
IC608	8-759-422-21	s	IC NJM4580VTE2
IC609	8-759-278-58	s	IC NJM4558V (TE2)
IC610	8-759-278-58	s	IC NJM4558V (TE2)
IC611	8-759-422-21	s	IC NJM4580VTE2
IC612	8-759-422-21	s	IC NJM4580VTE2
IC613	8-759-278-58	s	IC NJM4558V (TE2)
IC614	8-759-278-58	s	IC NJM4558V (TE2)

(AVP-6 BOARD suffix 11)

Ref. No. or Q'ty	Part No.	SP	Description
IC701	8-759-052-52	s	IC L78M05T-FA
IC702	8-759-052-52	s	IC L78M05T-FA
IC703	8-759-052-52	s	IC L78M05T-FA
JC100	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
JC201	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
JC500	1-216-864-11	s	CONDUCTOR, CHIP (1608)
JC503	1-216-864-11	s	CONDUCTOR, CHIP (1608)
JC504	1-216-864-11	s	CONDUCTOR, CHIP (1608)
JC507	1-216-864-11	s	CONDUCTOR, CHIP (1608)
JC700	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
JC701	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
JC702	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
JC703	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
JC704	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
L100	1-414-398-11	s	INDUCTOR (SMD) 10UH
L101	1-414-398-11	s	INDUCTOR (SMD) 10UH
L102	1-414-398-11	s	INDUCTOR (SMD) 10UH
L103	1-416-344-11	s	COIL, CHOKE 10UH
L104	1-414-398-11	s	INDUCTOR (SMD) 10UH
L105	1-414-398-11	s	INDUCTOR (SMD) 10UH
L106	1-414-398-11	s	INDUCTOR (SMD) 10UH
L300	1-414-398-11	s	INDUCTOR (SMD) 10UH
L301	1-414-398-11	s	INDUCTOR (SMD) 10UH
L302	1-414-398-11	s	INDUCTOR (SMD) 10UH
L303	1-414-398-11	s	INDUCTOR (SMD) 10UH
L304	1-414-398-11	s	INDUCTOR (SMD) 10UH
L305	1-414-398-11	s	INDUCTOR (SMD) 10UH
L306	1-414-398-11	s	INDUCTOR (SMD) 10UH
L307	1-414-398-11	s	INDUCTOR (SMD) 10UH
L400	1-414-398-11	s	INDUCTOR (SMD) 10UH
L401	1-414-398-11	s	INDUCTOR (SMD) 10UH
L402	1-414-398-11	s	INDUCTOR (SMD) 10UH
L403	1-414-398-11	s	INDUCTOR (SMD) 10UH
L500	1-414-398-11	s	INDUCTOR (SMD) 10UH
L501	1-414-398-11	s	INDUCTOR (SMD) 10UH
L604	1-414-398-11	s	INDUCTOR (SMD) 10UH
L605	1-414-400-11	s	INDUCTOR, 22UH
L606	1-414-400-11	s	INDUCTOR, 22UH
L607	1-414-400-11	s	INDUCTOR, 22UH
L608	1-414-400-11	s	INDUCTOR, 22UH
L700	1-414-400-11	s	INDUCTOR, 22UH
L701	1-414-400-11	s	INDUCTOR, 22UH
PH700	8-749-014-35	s	IC HCPL-0630-500
PH701	8-749-014-35	s	IC HCPL-0630-500
Q1	8-729-927-99	s	TRANSISTOR 2SC4617R
Q100	8-729-230-27	s	TRANSISTOR 2SA1213Y-TE12L
Q101	8-729-807-51	s	TRANSISTOR 2SD1623-S
Q102	8-729-230-27	s	TRANSISTOR 2SA1213Y-TE12L
Q103	8-729-230-27	s	TRANSISTOR 2SA1213Y-TE12L
Q104	8-729-807-51	s	TRANSISTOR 2SD1623-S
Q105	8-729-927-99	s	TRANSISTOR 2SC4617R
Q106	8-729-927-99	s	TRANSISTOR 2SC4617R
Q107	8-729-927-99	s	TRANSISTOR 2SC4617R
Q108	8-729-927-99	s	TRANSISTOR 2SC4617R
Q109	8-729-927-99	s	TRANSISTOR 2SC4617R
Q110	8-729-927-99	s	TRANSISTOR 2SC4617R
Q600	8-729-927-99	s	TRANSISTOR 2SC4617R

(AVP-6 BOARD suffix 11)

Ref. No. or Q'ty	Part No.	SP	Description
Q601	8-729-927-99	s	TRANSISTOR 2SC4617R
Q602	8-729-928-19	s	TRANSISTOR 2SA1774R
Q603	8-729-927-99	s	TRANSISTOR 2SC4617R
Q604	8-729-928-19	s	TRANSISTOR 2SA1774R
Q605	8-729-927-99	s	TRANSISTOR 2SC4617R
Q606	8-729-927-99	s	TRANSISTOR 2SC4617R
Q607	8-729-927-99	s	TRANSISTOR 2SC4617R
Q608	8-729-928-19	s	TRANSISTOR 2SA1774R
Q609	8-729-927-99	s	TRANSISTOR 2SC4617R
Q610	8-729-928-19	s	TRANSISTOR 2SA1774R
Q611	8-729-927-99	s	TRANSISTOR 2SC4617R
Q700	8-729-927-99	s	TRANSISTOR 2SC4617R
Q701	8-729-927-99	s	TRANSISTOR 2SC4617R
Q702	8-729-927-99	s	TRANSISTOR 2SC4617R
Q703	8-729-927-99	s	TRANSISTOR 2SC4617R
Q704	8-729-927-99	s	TRANSISTOR 2SC4617R
Q705	8-729-927-99	s	TRANSISTOR 2SC4617R
Q706	8-729-141-75	s	TRANSISTOR 2SD596DV345
Q707	8-729-141-75	s	TRANSISTOR 2SD596DV345
Q710	8-729-927-99	s	TRANSISTOR 2SC4617R
Q711	8-729-927-99	s	TRANSISTOR 2SC4617R
Q712	8-729-927-99	s	TRANSISTOR 2SC4617R
Q713	8-729-928-19	s	TRANSISTOR 2SA1774R
Q714	8-729-928-19	s	TRANSISTOR 2SA1774R
Q715	8-729-928-19	s	TRANSISTOR 2SA1774R
Q716	8-729-927-99	s	TRANSISTOR 2SC4617R
R100	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R101	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R102	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R103	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R104	1-208-931-11	s	RESISTOR, CHIP 68K (1005)
R105	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R106	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R107	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R108	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R109	1-208-931-11	s	RESISTOR, CHIP 68K (1005)
R110	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R111	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R113	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R114	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R115	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R116	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R117	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R118	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R119	1-208-931-11	s	RESISTOR, CHIP 68K (1005)
R120	1-208-931-11	s	RESISTOR, CHIP 68K (1005)
R121	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R122	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R123	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R124	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005
R125	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R126	1-208-703-11	s	RESISTOR,CHIP 6.8K 1/16W(1005)
R127	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R128	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R129	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R130	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R131	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R132	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)

(AVP-6 BOARD suffix 11)

Ref. No. or Q'ty	Part No.	SP	Description
R133	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R134	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R135	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R136	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R137	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R138	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R139	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R141	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R144	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R146	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R147	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R148	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R149	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R150	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R151	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R152	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R154	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R155	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R156	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R157	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R159	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R160	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R161	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R162	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R163	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R164	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R165	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R166	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R167	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R200	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R201	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R202	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R203	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R204	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R205	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R206	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R207	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R209	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R210	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R211	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R212	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R217	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R219	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R220	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R222	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R223	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R224	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R300	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R301	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R302	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R303	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R304	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R305	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R306	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R307	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R308	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R309	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R310	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R311	1-218-989-11	s	RESISTOR,CHIP 1M 1/16W (1005)

(AVP-6 BOARD suffix 11)

Ref. No. or Q'ty	Part No.	SP	Description
R312	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R313	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R314	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R315	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R316	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R317	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R318	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R319	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R320	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R321	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R322	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R323	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R324	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R325	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R326	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R327	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R328	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R329	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R330	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R331	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R332	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R333	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R334	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R335	1-208-860-11	s	RESISTOR CHIP 75 1/16W (1005)
R336	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R337	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R338	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R339	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R340	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R341	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R342	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R343	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R344	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R345	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R346	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R347	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R348	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R349	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R350	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R351	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R352	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R353	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R354	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R355	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R356	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R357	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R358	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R359	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R360	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R361	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R362	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R363	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R364	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R365	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R366	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R367	1-208-860-11	s	RESISTOR CHIP 75 1/16W (1005)
R401	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R402	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R403	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)

(AVP-6 BOARD suffix 11)

Ref. No. or Q'ty	Part No.	SP	Description
R404	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R405	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R406	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R407	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R408	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R409	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R410	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R411	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R412	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R413	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R414	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R415	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R416	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R417	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R418	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R419	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R420	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R421	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R422	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R423	1-208-947-11	s	RESISTOR CHIP 330K 1/16W(1005)
R424	1-208-947-11	s	RESISTOR CHIP 330K 1/16W(1005)
R425	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R426	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R429	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R430	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R431	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R434	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R435	1-208-943-11	s	RESISTOR CHIP 220K
R436	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R438	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R440	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R441	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R442	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R443	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R444	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R445	1-208-905-11	s	RESISTOR, CHIP 5.6K (1005)
R446	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R447	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R448	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R449	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R450	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R451	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R452	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R453	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R454	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R455	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R456	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R457	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R458	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R459	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R460	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R462	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R463	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R464	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R465	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R466	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R467	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R468	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R469	1-208-911-11	s	RESISTOR, CHIP 10K (1005)

(AVP-6 BOARD suffix 11)

Ref. No. or Q'ty	Part No.	SP	Description
R500	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R501	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R502	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R503	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R504	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R505	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R506	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R507	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R508	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R509	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R510	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R511	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R512	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R513	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R514	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R515	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R516	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R517	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R518	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R519	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R520	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R521	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R522	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R523	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R524	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R525	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R526	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R527	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R528	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R529	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R530	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R531	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R532	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R533	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R534	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R535	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R536	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R537	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R538	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R539	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R540	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R541	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R542	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R543	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R544	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R545	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R546	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R547	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R548	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R549	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R550	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R551	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R552	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R553	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R554	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R556	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R558	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R559	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R560	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)

(AVP-6 BOARD suffix 11)

Ref. No. or Q'ty	Part No.	SP	Description
R561	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R562	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R564	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R566	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R567	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R568	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R569	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R570	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R571	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R572	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R573	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R580	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R581	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R582	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R583	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R584	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R585	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R586	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R587	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R588	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R589	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R590	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R591	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R600	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R601	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R602	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R603	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R604	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R605	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R606	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R607	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R608	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R609	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R610	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R611	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R612	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R613	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R614	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R615	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R616	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R617	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R618	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R619	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R620	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R621	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R622	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R623	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R624	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R625	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R626	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R627	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R628	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R629	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R630	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R631	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R632	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R633	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R634	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R635	1-208-923-11	s	RESISTOR, CHIP 33K (1005)

(AVP-6 BOARD suffix 11)

Ref. No. or Q'ty	Part No.	SP	Description
R636	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R637	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R638	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R639	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R640	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R641	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R642	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R643	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R644	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R645	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R646	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R647	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R648	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R649	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R650	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R651	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R652	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R653	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R654	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R655	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R656	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R657	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R658	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R659	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R660	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R661	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R662	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R663	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R664	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R665	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R666	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R667	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R668	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R669	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R670	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R671	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R672	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R673	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R674	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R675	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R676	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R677	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R678	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R679	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R680	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R681	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R682	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R683	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R684	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R685	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R686	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R687	1-208-933-11	s	RESISTOR CHIP 82K
R688	1-208-933-11	s	RESISTOR CHIP 82K
R689	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005
R690	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005
R691	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R692	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R693	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R694	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)

(AVP-6 BOARD suffix 11)

Ref. No. or Q'ty	Part No.	SP	Description
R695	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R696	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R697	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R698	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R699	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R700	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R701	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R702	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R703	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R704	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R705	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R706	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R707	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R708	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R709	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R710	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R711	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R712	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R713	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R714	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R715	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R716	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R717	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R718	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R719	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R720	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R721	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R722	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R723	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R724	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R725	1-208-861-81	s	RESISTOR,CHIP 82 (1005)
R726	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R727	1-208-861-81	s	RESISTOR,CHIP 82 (1005)
R728	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R729	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R730	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R731	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R732	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R733	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R734	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R735	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R736	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R737	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R738	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R739	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R740	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R741	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R742	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R743	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R744	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R745	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R746	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R747	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R748	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R749	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R750	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R751	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R752	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R753	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)

(AVP-6 BOARD suffix 11)

Ref. No. or Q'ty	Part No.	SP	Description
R754	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R755	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R756	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R757	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R758	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R759	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R760	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R761	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R762	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R763	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R764	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R765	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R766	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R767	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R768	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R769	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R770	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R771	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R772	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R773	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R774	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R775	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R776	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R777	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R778	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R779	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R780	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R781	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R782	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R783	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R784	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R785	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R786	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R787	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R788	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R789	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R790	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R791	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R792	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R793	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R794	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R795	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R796	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R797	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R798	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R799	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R800	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R801	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R802	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R803	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R804	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R805	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R806	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R807	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R808	1-244-161-11	s	RESISTOR, CHIP 2.2(1005)
R809	1-244-161-11	s	RESISTOR, CHIP 2.2(1005)
R810	1-244-161-11	s	RESISTOR, CHIP 2.2(1005)
R999	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)

(AVP-6 BOARD suffix 11)

Ref. No. or Q'ty	Part No.	SP	Description
RB102	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB103	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB104	1-234-375-21	s	RES, NETWORK 1KX4 (1005)
RB105	1-234-375-21	s	RES, NETWORK 1KX4 (1005)
RB200	1-234-381-21	s	RES, NETWORK 100KX4 (1005)
RB201	1-234-381-21	s	RES, NETWORK 100KX4 (1005)
RB202	1-234-381-21	s	RES, NETWORK 100KX4 (1005)
RB203	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB204	1-234-381-21	s	RES, NETWORK 100KX4 (1005)
RB205	1-234-381-21	s	RES, NETWORK 100KX4 (1005)
RB206	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB207	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB208	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB209	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB210	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB211	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB212	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB213	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB214	1-234-375-21	s	RES, NETWORK 1KX4 (1005)
RB215	1-234-375-21	s	RES, NETWORK 1KX4 (1005)
RB216	1-234-375-21	s	RES, NETWORK 1KX4 (1005)
RB217	1-234-375-21	s	RES, NETWORK 1KX4 (1005)
RB218	1-234-375-21	s	RES, NETWORK 1KX4 (1005)
RB219	1-234-381-21	s	RES, NETWORK 100KX4 (1005)
RB300	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB301	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB302	1-234-381-21	s	RES, NETWORK 100KX4 (1005)
RB303	1-234-381-21	s	RES, NETWORK 100KX4 (1005)
RB304	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB305	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB306	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB307	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB308	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB309	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB310	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB311	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB312	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB313	1-234-381-21	s	RES, NETWORK 100KX4 (1005)
RB314	1-234-381-21	s	RES, NETWORK 100KX4 (1005)
RB315	1-234-375-21	s	RES, NETWORK 1KX4 (1005)
RB316	1-234-375-21	s	RES, NETWORK 1KX4 (1005)
RB400	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB501	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB502	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB601	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RV500	1-225-793-11	s	RES, ADJ, CERMET 20K
RV501	1-225-793-11	s	RES, ADJ, CERMET 20K
RV600	1-241-264-11	s	RESISTOR ADJ 10K (CERMET)
RV601	1-241-264-11	s	RESISTOR ADJ 10K (CERMET)
S1	1-762-775-11	s	SWITCH, TOGGLE
S4	1-692-271-31	s	SWITCH, SLIDE
S11	1-570-711-11	s	SWITCH,SLIDE
S12	1-570-711-11	s	SWITCH,SLIDE
S21	1-570-711-11	s	SWITCH,SLIDE
S22	1-570-711-11	s	SWITCH,SLIDE
S31	1-570-711-11	s	SWITCH,SLIDE
S32	1-570-711-11	s	SWITCH,SLIDE
S500	1-570-711-11	s	SWITCH,SLIDE
S501	1-570-711-11	s	SWITCH,SLIDE

(AVP-6 BOARD suffix 11)

Ref. No. or Q'ty	Part No.	SP	Description
S502	1-570-711-11	s	SWITCH,SLIDE
S503	1-570-711-11	s	SWITCH,SLIDE
S600	1-570-711-11	s	SWITCH,SLIDE
S601	1-570-711-11	s	SWITCH,SLIDE
S602	1-570-711-11	s	SWITCH,SLIDE
S603	1-570-711-11	s	SWITCH,SLIDE
T700	1-443-158-11	s	TRANSFORMER, DC-DC CONVERTER
T701	1-443-158-11	s	TRANSFORMER, DC-DC CONVERTER
THP100 ⚠	1-803-615-11	s	THERMISTOR, POSITIVE
THP101 ⚠	1-803-615-11	s	THERMISTOR, POSITIVE
THP102 ⚠	1-804-616-11	s	THERMISTOR, POSITIVE
THP103 ⚠	1-804-458-21	s	THERMISTOR, POSITIVE
THP104 ⚠	1-804-616-11	s	THERMISTOR, POSITIVE
THP105 ⚠	1-804-616-11	s	THERMISTOR, POSITIVE
THP106 ⚠	1-804-616-11	s	THERMISTOR, POSITIVE
TP300	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
TP301	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
TP302	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
TP400	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
TP401	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
TP402	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
TP403	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
TP404	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
TP405	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
TP500	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
TP501	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
TP502	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
TP503	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
TP504	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
TP505	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
TP600	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
TP601	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
X300	1-813-253-12	s	OSCILLATOR, CRYSTAL

CN-2672/2672G BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1161-081-A	s	MOUNTED CIRCUIT BOARD, CN-2672G (GOLD)
1pc	A-1129-231-A	s	MOUNTED CIRCUIT BOARD, CN-2672 (SILVER)
2pcs	3-165-162-01	s	SCREW(+P2.6X5)(TYPE 1) (ST)
1pc	3-725-295-21	s	SCREW, (+) (B3)
C1	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C2	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C3	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C4	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
CN1	1-561-336-00	s	CONNECTOR,COAXIAL
CN2	1-561-336-00	s	CONNECTOR,COAXIAL
CN3	1-561-336-00	s	CONNECTOR,COAXIAL
CN4	1-561-336-00	s	CONNECTOR,COAXIAL
CN5	1-561-336-00	s	CONNECTOR,COAXIAL
CN6	1-561-336-00	s	CONNECTOR,COAXIAL
CN7	1-766-696-11	o	CONNECTOR, ROUND TYPE 8P
CN9	1-778-647-31	s	CONNECTOR, FFC/FPC(ZIF) ST 15P (GOLD)
	1-778-647-21	o	CONNECTOR, FFC (ZIF) 15P (SILVER)
CN10	1-764-079-21	s	PIN, CONNECTOR (PC BOARD) 4P
CN11	1-764-079-21	s	PIN, CONNECTOR (PC BOARD) 4P
CN12	1-785-125-11	o	CONNECTOR 6P
CN13	1-785-125-11	o	CONNECTOR 6P
CN14	1-778-652-31	s	CONNECTOR, FFC (ZIF) 50P(GOLD)
	1-778-652-21	s	CONNECTOR, FFC (ZIF) 50P (SILVER)
CN15	1-695-480-21	o	PIN, CONNECTOR (PC BOARD) 2P
FL1	1-239-897-12	s	FILTER, EMI (SMD)
FL2	1-239-897-12	s	FILTER, EMI (SMD)
FL3	1-239-897-12	s	FILTER, EMI (SMD)
FL4	1-239-897-12	s	FILTER, EMI (SMD)
FL5	1-239-897-12	s	FILTER, EMI (SMD)
FL6	1-239-897-12	s	FILTER, EMI (SMD)
FL7	1-239-897-12	s	FILTER, EMI (SMD)
FL8	1-239-897-12	s	FILTER, EMI (SMD)
FL9	1-239-897-12	s	FILTER, EMI (SMD)
FL10	1-239-897-12	s	FILTER, EMI (SMD)
FL11	1-239-897-12	s	FILTER, EMI (SMD)
FL12	1-239-897-12	s	FILTER, EMI (SMD)
JC1	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R2	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)

CN-2673 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1129-232-A	s	MOUNTED CIRCUIT BOARD, CN-2673
CN1	1-568-005-11	s	CONNECTOR,XLR TYPE 3P
CN2	1-568-005-11	s	CONNECTOR,XLR TYPE 3P
CN3	1-785-125-11	o	CONNECTOR 6P
FL1	1-239-897-12	s	FILTER, EMI (SMD)
FL2	1-239-897-12	s	FILTER, EMI (SMD)
FL3	1-239-897-12	s	FILTER, EMI (SMD)
FL4	1-239-897-12	s	FILTER, EMI (SMD)
FL5	1-239-897-12	s	FILTER, EMI (SMD)
FL6	1-239-897-12	s	FILTER, EMI (SMD)
JC2	1-216-864-11	s	CONDUCTOR, CHIP (1608)
JC3	1-216-864-11	s	CONDUCTOR, CHIP (1608)
JC5	1-216-864-11	s	CONDUCTOR, CHIP (1608)
JC7	1-216-864-11	s	CONDUCTOR, CHIP (1608)
JC8	1-216-864-11	s	CONDUCTOR, CHIP (1608)
JC10	1-216-864-11	s	CONDUCTOR, CHIP (1608)

CN-2674/2674G BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1161-082-A	s	MOUNTED CIRCUIT BOARD, CN-2674G (GOLD)
1pc	A-1129-233-A	s	MOUNTED CIRCUIT BOARD, CN-2674 (SILVER)
1pc	3-725-295-21	s	SCREW, (+) (B3)
CN1	1-561-336-00	s	CONNECTOR,COAXIAL
CN2	1-561-336-00	s	CONNECTOR,COAXIAL
CN3	1-561-336-00	s	CONNECTOR,COAXIAL
CN4	1-561-336-00	s	CONNECTOR,COAXIAL
CN5	1-561-336-00	s	CONNECTOR,COAXIAL
CN6	1-561-336-00	s	CONNECTOR,COAXIAL
CN7	1-561-336-00	s	CONNECTOR,COAXIAL
CN8	1-561-336-00	s	CONNECTOR,COAXIAL
CN9	1-778-647-31	s	CONNECTOR, FFC/FPC(ZIF) ST 15P (GOLD)
	1-778-647-21	o	CONNECTOR, FFC (ZIF) 15P (SILVER)
R1	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R2	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)

CN-2675/2675G BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1161-089-A	s	MOUNTED CIRCUIT BOARD, CN-2675G (GOLD)
1pc	A-1129-283-A	s	MOUNTED CIRCUIT BOARD, CN-2675 (SILVER)
C1	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C2	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
CN7	1-778-647-31	s	CONNECTOR, FFC/FPC(ZIF) ST 15P (GOLD)
	1-778-647-21	o	CONNECTOR, FFC (ZIF) 15P (SILVER)
CN8	1-764-079-21	s	PIN, CONNECTOR (PC BOARD) 4P
CN9	1-785-125-11	o	CONNECTOR 6P
CN10	1-778-647-31	s	CONNECTOR, FFC/FPC(ZIF) ST 15P (GOLD)
	1-778-647-21	o	CONNECTOR, FFC (ZIF) 15P (SILVER)
CN11	1-778-652-31	s	CONNECTOR, FFC (ZIF) 50P (GOLD)
	1-778-652-21	s	CONNECTOR, FFC (ZIF) 50P (SILVER)
CN12	1-695-480-21	o	PIN, CONNECTOR (PC BOARD) 2P
FL1	1-239-897-12	s	FILTER, EMI (SMD)
FL2	1-239-897-12	s	FILTER, EMI (SMD)
FL3	1-239-897-12	s	FILTER, EMI (SMD)
FL4	1-239-897-12	s	FILTER, EMI (SMD)
FL5	1-239-897-12	s	FILTER, EMI (SMD)
FL6	1-239-897-12	s	FILTER, EMI (SMD)
JC1	1-216-864-11	s	CONDUCTOR, CHIP (1608)
JC3	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R2	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)

CN-2676 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1129-284-A	s	MOUNTED CIRCUIT BOARD, CN-2676
CN1	1-568-005-11	s	CONNECTOR,XLR TYPE 3P
CN2	1-568-005-11	s	CONNECTOR,XLR TYPE 3P
CN3	1-770-623-21	s	PIN, CONNECTOR 6P
FL1	1-239-897-12	s	FILTER, EMI (SMD)
FL2	1-239-897-12	s	FILTER, EMI (SMD)
FL3	1-239-897-12	s	FILTER, EMI (SMD)
FL4	1-239-897-12	s	FILTER, EMI (SMD)
FL5	1-239-897-12	s	FILTER, EMI (SMD)
FL6	1-239-897-12	s	FILTER, EMI (SMD)
JC2	1-216-864-11	s	CONDUCTOR, CHIP (1608)
JC3	1-216-864-11	s	CONDUCTOR, CHIP (1608)
JC5	1-216-864-11	s	CONDUCTOR, CHIP (1608)
JC7	1-216-864-11	s	CONDUCTOR, CHIP (1608)
JC8	1-216-864-11	s	CONDUCTOR, CHIP (1608)
JC10	1-216-864-11	s	CONDUCTOR, CHIP (1608)

CN-2677/2677G BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1161-090-A	s	MOUNTED CIRCUIT BOARD, CN-2677G (GOLD)
1pc	A-1129-285-A	s	MOUNTED CIRCUIT BOARD, CN-2677 (SILVER)
C1	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C2	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C3	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
CN2	1-778-647-31	s	CONNECTOR, FFC/FPC(ZIF) ST 15P (GOLD)
	1-778-647-21	o	CONNECTOR, FFC (ZIF) 15P (SILVER)
FL1	1-239-897-12	s	FILTER, EMI (SMD)
FL2	1-239-897-12	s	FILTER, EMI (SMD)
FL3	1-239-897-12	s	FILTER, EMI (SMD)
FL4	1-239-897-12	s	FILTER, EMI (SMD)
FL5	1-239-897-12	s	FILTER, EMI (SMD)
FL6	1-239-897-12	s	FILTER, EMI (SMD)
FL7	1-239-897-12	s	FILTER, EMI (SMD)
FL8	1-239-897-12	s	FILTER, EMI (SMD)

CN-2678 BOARD (suffix 12, 31)

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1129-286-A	s	MOUNTED CIRCUIT BOARD, CN-2678
C1	1-114-214-81	s	CAP,CHIP CERAMIC470PF CH1005
C11	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C13	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C15	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
CN1	1-784-602-11	s	CONNECTOR, XLR (RECEPTACLE) 5P
CN2	1-764-080-21	o	PIN, CONNECTOR (PC BOARD) 8P
FB11	1-414-445-21	s	FERRITE, EMI (SMD) (1608)
FB12	1-414-445-21	s	FERRITE, EMI (SMD) (1608)
FB13	1-414-445-21	s	FERRITE, EMI (SMD) (1608)
FB14	1-414-445-21	s	FERRITE, EMI (SMD) (1608)
FB15	1-414-445-21	s	FERRITE, EMI (SMD) (1608)
FB16	1-414-445-21	s	FERRITE, EMI (SMD) (1608)
L1	1-457-217-21	o	COMMON MODE CHOKE COIL

CN-2678 BOARD (suffix 11)

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1129-286-A	s	MOUNTED CIRCUIT BOARD, CN-2678
CN1	1-784-602-11	s	CONNECTOR, XLR (RECEPTACLE) 5P
CN2	1-764-080-21	o	PIN, CONNECTOR (PC BOARD) 8P
FL1	1-239-897-12	s	FILTER, EMI (SMD)
FL2	1-239-897-12	s	FILTER, EMI (SMD)
FL3	1-239-897-12	s	FILTER, EMI (SMD)
FL4	1-239-897-12	s	FILTER, EMI (SMD)
FL5	1-239-897-12	s	FILTER, EMI (SMD)

CN-2700 BOARD (suffix 12, 31)

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1129-236-A	s	MOUNTED CIRCUIT BOARD, CN-2700
C1	1-114-214-81	s	CAP,CHIP CERAMIC470PF CH1005
C11	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C13	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C15	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
CN1	1-784-602-11	s	CONNECTOR, XLR (RECEPTACLE) 5P
CN2	1-764-080-21	o	PIN, CONNECTOR (PC BOARD) 8P
FB11	1-414-445-21	s	FERRITE, EMI (SMD) (1608)
FB12	1-414-445-21	s	FERRITE, EMI (SMD) (1608)
FB13	1-414-445-21	s	FERRITE, EMI (SMD) (1608)
FB14	1-414-445-21	s	FERRITE, EMI (SMD) (1608)
FB15	1-414-445-21	s	FERRITE, EMI (SMD) (1608)
FB16	1-414-445-21	s	FERRITE, EMI (SMD) (1608)
L1	1-457-217-21	o	COMMON MODE CHOKE COIL

CN-2700 BOARD (suffix 11)

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1129-236-A	s	MOUNTED CIRCUIT BOARD, CN-2700
CN1	1-784-602-11	s	CONNECTOR, XLR (RECEPTACLE) 5P
CN2	1-764-080-21	o	PIN, CONNECTOR (PC BOARD) 8P
FL1	1-239-897-12	s	FILTER, EMI (SMD)
FL2	1-239-897-12	s	FILTER, EMI (SMD)
FL3	1-239-897-12	s	FILTER, EMI (SMD)
FL4	1-239-897-12	s	FILTER, EMI (SMD)
FL5	1-239-897-12	s	FILTER, EMI (SMD)

CN-2718 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1129-237-A	s	MOUNTED CIRCUIT BOARD, CN-2718
CN1	1-691-291-11	o	PIN,CONNECTOR(PC BOARD)5P
CN2	1-691-291-11	o	PIN,CONNECTOR(PC BOARD)5P

CN-2805/2805G BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1161-079-A	s	MOUNTED CIRCUIT BOARD, CN-2805G (GOLD)
1pc	A-1129-238-A	s	MOUNTED CIRCUIT BOARD, CN-2805 (SILVER)
C1	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C2	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C3	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
CN1	1-819-262-11	s	CONNECTOR, ROUND TYPE 12P
CN2	1-785-840-31	s	CONNECTOR, FFC/FPC(ZIF) AN 15P (GOLD)
	1-785-840-21	s	CONNECTOR, FFC (ZIF) 15P (SILVER)
FL1	1-239-897-12	s	FILTER, EMI (SMD)
FL2	1-239-897-12	s	FILTER, EMI (SMD)
FL3	1-239-897-12	s	FILTER, EMI (SMD)
FL4	1-239-897-12	s	FILTER, EMI (SMD)
FL5	1-239-897-12	s	FILTER, EMI (SMD)
FL6	1-239-897-12	s	FILTER, EMI (SMD)
FL7	1-239-897-12	s	FILTER, EMI (SMD)
FL8	1-239-897-12	s	FILTER, EMI (SMD)

CN-3275 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1769-662-A	s	MOUNTED CIRCUIT BOARD, CN-3275
C9001	1-116-117-11	s	CAP, ELECT 22MF 105
C9017	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
CN9001	1-819-442-11	s	HEADER ASSEMBLY FOR PWB 14P
CN9002	1-580-547-11	o	PIN, CONNECTOR (PC BOARD) 36P
CN9003	1-766-198-51	s	CONNECTOR, FPC 26P
CN9004	1-691-291-11	o	PIN, CONNECTOR (PC BOARD) 5P
CN9005	1-779-094-11	s	PIN, CONNECTOR (PC BOARD) 10P
CN9006	1-779-092-11	s	PIN, CONNECTOR (PC BOARD) 10P
CN9007	1-691-291-11	o	PIN, CONNECTOR (PC BOARD) 5P
TP9001	1-780-318-11	s	TERMINAL, LUG
TP9002	1-780-627-11	s	TERMINAL, LUG

CNB-21/21G BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1161-080-A	s	MOUNTED CIRCUIT BOARD, CNB-21G (GOLD)
1pc	A-1129-235-A	s	MOUNTED CIRCUIT BOARD, CNB-21 (SILVER)
10pcs	7-682-545-09	s	SCREW +B3X4
C101	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C102	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C103	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C104	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C105	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C106	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C107	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C108	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C109	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C110	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C111	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C112	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C113	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C114	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C115	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C116	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C117	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C118	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C119	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C120	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C121	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C122	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C123	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C124	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C125	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C126	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C127	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C128	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C129	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C130	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C131	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C132	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C133	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C134	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C135	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C136	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C201	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C202	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C203	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C204	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C205	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C206	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C207	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C208	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C209	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C210	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C211	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C212	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C213	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C214	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C215	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C216	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C217	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C218	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C219	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF

(CNB-21/21G BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C220	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C221	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C222	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C223	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C224	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C225	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C226	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C227	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C228	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
CN1	1-794-400-11	s	CONNECTOR, D SUB (SMD) 25P
CN2	1-794-399-11	s	CONNECTOR, D SUB (SMD) 15P
CN3	1-794-399-11	s	CONNECTOR, D SUB (SMD) 15P
CN4	1-794-398-11	s	CONNECTOR, D SUB (SMD) 9P
CN5	1-794-399-11	s	CONNECTOR, D SUB (SMD) 15P
CN6	1-778-652-31	s	CONNECTOR, FFC (ZIF) 50P (GOLD)
	1-778-652-21	s	CONNECTOR, FFC (ZIF) 50P (SILVER)
CN7	1-778-652-31	s	CONNECTOR, FFC (ZIF) 50P (GOLD)
	1-778-652-21	s	CONNECTOR, FFC (ZIF) 50P (SILVER)
CN8	1-778-652-31	s	CONNECTOR, FFC (ZIF) 50P (GOLD)
	1-778-652-21	s	CONNECTOR, FFC (ZIF) 50P (SILVER)
CN9	1-778-652-31	s	CONNECTOR, FFC (ZIF) 50P (GOLD)
	1-778-652-21	s	CONNECTOR, FFC (ZIF) 50P (SILVER)
FL101	1-239-896-12	s	FILTER, EMI (SMD)
FL102	1-239-896-12	s	FILTER, EMI (SMD)
FL103	1-239-896-12	s	FILTER, EMI (SMD)
FL104	1-239-896-12	s	FILTER, EMI (SMD)
FL105	1-239-896-12	s	FILTER, EMI (SMD)
FL106	1-239-896-12	s	FILTER, EMI (SMD)
FL107	1-239-896-12	s	FILTER, EMI (SMD)
FL108	1-239-896-12	s	FILTER, EMI (SMD)
FL109	1-239-896-12	s	FILTER, EMI (SMD)
FL110	1-239-896-12	s	FILTER, EMI (SMD)
JC1	1-216-864-11	s	CONDUCTOR, CHIP (1608)
JC3	1-216-864-11	s	CONDUCTOR, CHIP (1608)
JC5	1-216-864-11	s	CONDUCTOR, CHIP (1608)
JC6	1-216-864-11	s	CONDUCTOR, CHIP (1608)

CNB-22/22G BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1161-088-A	s	MOUNTED CIRCUIT BOARD, CNB-22G (GOLD)
1pc	A-1129-287-A	s	MOUNTED CIRCUIT BOARD, CNB-22 (SILVER)
4pcs	7-682-545-09	s	SCREW +B3X4
C1	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C2	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C3	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C4	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C5	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C6	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C7	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C8	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C9	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C10	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C11	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C12	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C13	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C14	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C15	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C16	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C17	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C18	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C19	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C20	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C21	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C22	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C23	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C24	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C25	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C26	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C27	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C28	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C29	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C30	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C31	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C32	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C33	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C34	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C35	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C36	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
CN1	1-794-400-11	s	CONNECTOR, D SUB (SMD) 25P
CN2	1-794-399-11	s	CONNECTOR, D SUB (SMD) 15P
CN3	1-778-652-31	s	CONNECTOR, FFC (ZIF) 50P (GOLD)
	1-778-652-21	s	CONNECTOR, FFC (ZIF) 50P (SILVER)
CN4	1-778-652-31	s	CONNECTOR, FFC (ZIF) 50P (GOLD)
	1-778-652-21	s	CONNECTOR, FFC (ZIF) 50P (SILVER)
CN5	1-778-652-31	s	CONNECTOR, FFC (ZIF) 50P (GOLD)
	1-778-652-21	s	CONNECTOR, FFC (ZIF) 50P (SILVER)
FL1	1-239-896-12	s	FILTER, EMI (SMD)
FL2	1-239-896-12	s	FILTER, EMI (SMD)
JC1	1-216-864-11	s	CONDUCTOR, CHIP (1608)
JC3	1-216-864-11	s	CONDUCTOR, CHIP (1608)
JC5	1-216-864-11	s	CONDUCTOR, CHIP (1608)
JC6	1-216-864-11	s	CONDUCTOR, CHIP (1608)

DRX-5 BOARD (suffix 14)

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1129-302-A	s	MOUNTED CIRCUIT BOARD, DRX-5
4pcs	7-682-947-01	s	SCREW +PSW 3X6
C1	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C2	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C3	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C4	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C5	1-128-589-21	s	CAP, CHIP ELECT 47MF
C6	1-128-589-21	s	CAP, CHIP ELECT 47MF
C13	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C14	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C17	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C18	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C19	1-100-352-91	s	CAP, CERAMIC 1MF C (1608)
C20	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C21	1-100-352-91	s	CAP, CERAMIC 1MF C (1608)
C22	1-100-352-91	s	CAP, CERAMIC 1MF C (1608)
C23	1-100-352-91	s	CAP, CERAMIC 1MF C (1608)
C24	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C25	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C26	1-100-352-91	s	CAP, CERAMIC 1MF C (1608)
C27	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C28	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C29	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C30	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C31	1-128-589-21	s	CAP, CHIP ELECT 47MF
C32	1-128-589-21	s	CAP, CHIP ELECT 47MF
C33	1-128-589-21	s	CAP, CHIP ELECT 47MF
C34	1-128-589-21	s	CAP, CHIP ELECT 47MF
C35	1-128-589-21	s	CAP, CHIP ELECT 47MF
C36	1-128-589-21	s	CAP, CHIP ELECT 47MF
C37	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3225
C38	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3225
C39	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3225
C40	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C41	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C42	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C43	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C44	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C45	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C46	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C47	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C48	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C49	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C50	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C51	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C52	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C53	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C54	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C55	1-112-015-91	s	CAP, CHIP CERAMIC 47MF B 3225
C56	1-112-015-91	s	CAP, CHIP CERAMIC 47MF B 3225
C57	1-112-015-91	s	CAP, CHIP CERAMIC 47MF B 3225
C58	1-112-015-91	s	CAP, CHIP CERAMIC 47MF B 3225
C59	1-112-015-91	s	CAP, CHIP CERAMIC 47MF B 3225
C60	1-112-015-91	s	CAP, CHIP CERAMIC 47MF B 3225
C61	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C62	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C63	1-112-015-91	s	CAP, CHIP CERAMIC 47MF B 3225
C64	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(DRX-5 BOARD suffix 14)

Ref. No. or Q'ty	Part No.	SP	Description
C65	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C66	1-164-936-81	s	CAP, CHIP CERAMIC 680PF B 1005
C67	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C68	1-164-936-81	s	CAP, CHIP CERAMIC 680PF B 1005
C69	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C70	1-164-936-81	s	CAP, CHIP CERAMIC 680PF B 1005
C71	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C72	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C73	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C80	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C81	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C82	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C83	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C84	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C85	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C86	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C87	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C88	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C89	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C90	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C91	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C92	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C93	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C94	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C103	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C105	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C106	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C107	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C108	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C109	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C110	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C111	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C112	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C113	1-100-507-91	s	CAP, CERAMIC 4.7MF C (1608)
C114	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C116	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C117	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C118	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C119	1-100-507-91	s	CAP, CERAMIC 4.7MF C (1608)
C120	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C121	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C122	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C123	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C124	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C125	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C126	1-100-507-91	s	CAP, CERAMIC 4.7MF C (1608)
C127	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C128	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C129	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C130	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C133	1-100-507-91	s	CAP, CERAMIC 4.7MF C (1608)
C134	1-100-507-91	s	CAP, CERAMIC 4.7MF C (1608)
C153	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C155	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C156	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C157	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C158	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C159	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C160	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(DRX-5 BOARD suffix 14)

Ref. No. or Q'ty	Part No.	SP	Description
C161	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C162	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C163	1-100-507-91	s	CAP, CERAMIC 4.7MF C (1608)
C164	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C166	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C167	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C168	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C169	1-100-507-91	s	CAP, CERAMIC 4.7MF C (1608)
C170	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C171	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C172	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C173	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C174	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C175	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C176	1-100-507-91	s	CAP, CERAMIC 4.7MF C (1608)
C177	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C178	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C179	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C180	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C183	1-100-507-91	s	CAP, CERAMIC 4.7MF C (1608)
C184	1-100-507-91	s	CAP, CERAMIC 4.7MF C (1608)
C201	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C202	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C203	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C204	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C205	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C206	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C207	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C208	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C209	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C210	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C211	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C212	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C213	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C214	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C215	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C216	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C217	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C218	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C219	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C251	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C310	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C401	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C402	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C403	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C404	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C405	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C406	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C407	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C408	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C409	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C410	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C411	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C412	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C413	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C414	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C415	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C416	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C417	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)

(DRX-5 BOARD suffix 14)

Ref. No. or Q'ty	Part No.	SP	Description
C418	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C419	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C420	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C421	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C422	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C423	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C424	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C425	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C426	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C427	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C428	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C429	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C430	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C450	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C451	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C452	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C453	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C454	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C455	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C456	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C457	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C458	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C459	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C460	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C461	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C462	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C463	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C464	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C465	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C466	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C467	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C468	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C469	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C470	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C471	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C472	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C473	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C478	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C479	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C501	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C504	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C505	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C507	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C508	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C509	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C510	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C511	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C512	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C513	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C514	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C515	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C517	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C518	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C519	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C520	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C521	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C522	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C523	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C601	1-165-989-91	s	CAP, CERAMIC 10MF (2012)

(DRX-5 BOARD suffix 14)

Ref. No. or Q'ty	Part No.	SP	Description
C602	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C603	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C604	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C605	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C606	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C607	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C608	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C609	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C610	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C611	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C612	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C613	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C614	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C615	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C616	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C617	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C618	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C619	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C620	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C621	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C622	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C623	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C624	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C625	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C626	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C627	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C628	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C629	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C630	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C631	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C632	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C701	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C702	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C703	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C704	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C705	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C706	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C707	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C708	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C709	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C710	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C711	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C712	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C713	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C714	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C715	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C716	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C717	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C718	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C719	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C720	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C721	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C722	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C723	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C724	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C725	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C726	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C727	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C728	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)

(DRX-5 BOARD suffix 14)

Ref. No. or Q'ty	Part No.	SP	Description
C729	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C730	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C731	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C732	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C733	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C734	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C735	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C736	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C737	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C738	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C739	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C740	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C741	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C742	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C743	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C744	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C745	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C746	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C747	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C748	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C749	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C750	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C751	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C752	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C753	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C754	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C755	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C756	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C757	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C758	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C759	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C802	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C803	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C804	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C805	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C806	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C821	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C822	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C823	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C824	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C825	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C826	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C901	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C911	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C912	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C913	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C914	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C915	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C916	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C917	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C918	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C919	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C920	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C921	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C922	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C923	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C924	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C925	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C926	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(DRX-5 BOARD suffix 14)

Ref. No. or Q'ty	Part No.	SP	Description
C927	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C928	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C929	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C930	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C931	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
CN3	1-764-093-21	o	PIN, CONNECTOR (PC BOARD) 8P
D1	8-719-017-03	s	DIODE 02DZ4.7-TPH3
D2	8-719-017-03	s	DIODE 02DZ4.7-TPH3
D3	8-719-074-31	s	DIODE CL-196YG-CD-T
D201	8-719-074-31	s	DIODE CL-196YG-CD-T
D202	8-719-074-31	s	DIODE CL-196YG-CD-T
D203	8-719-074-31	s	DIODE CL-196YG-CD-T
D204	6-500-008-01	s	DIODE CL-196TLY-CD-T
D205	6-500-008-01	s	DIODE CL-196TLY-CD-T
D206	8-719-074-31	s	DIODE CL-196YG-CD-T
D207	8-719-074-31	s	DIODE CL-196YG-CD-T
D208	8-719-074-31	s	DIODE CL-196YG-CD-T
D209	8-719-074-31	s	DIODE CL-196YG-CD-T
D210	8-719-074-31	s	DIODE CL-196YG-CD-T
E1	1-535-877-22	s	CHIP, CHECKER
E2	1-535-877-22	s	CHIP, CHECKER
E3	1-535-877-22	s	CHIP, CHECKER
E4	1-535-877-22	s	CHIP, CHECKER
FB1	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB2	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB3	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB4	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB5	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB6	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB101	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB102	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB103	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB104	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB105	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB106	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB107	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB108	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB109	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB151	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB152	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB153	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB154	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB155	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB156	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB157	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB158	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB159	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB501	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB502	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB801	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB802	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FL501	1-233-891-21	s	FILTER, LOW PASS
IC1	8-759-327-01	s	IC NJM062V(TE2)
IC2	6-704-976-01	s	IC ADR381ARTZ-REEL7
IC3	8-759-327-01	s	IC NJM062V(TE2)
IC4	6-701-572-01	s	IC TPS54610PWPR
IC5	6-701-572-01	s	IC TPS54610PWPR

(DRX-5 BOARD suffix 14)

Ref. No. or Q'ty	Part No.	SP	Description
IC6	6-701-572-01	s	IC TPS54610PWPR
IC7	8-759-338-95	s	IC NJM2903V(TE2)
IC80	6-700-655-01	s	IC LT1963ES8#TR
IC81	8-759-592-42	s	IC TC7SZ00FU(TE85R)
IC101	6-708-741-01	s	IC GS1531-CBE2
IC151	6-708-741-01	s	IC GS1531-CBE2
IC201	8-759-472-43	s	IC 74VHC245MTCX
IC202	8-759-472-43	s	IC 74VHC245MTCX
IC203	8-759-472-43	s	IC 74VHC245MTCX
IC205	8-752-392-03	s	IC CXD1095BR
IC206	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC207	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC208	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC210	8-759-363-26	s	IC RN5VD28AA-TL-FA
IC216	8-759-472-39	s	IC 74VHC244MTCX
IC217	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC218	8-759-679-55	s	IC SN74LVC08APWR
IC219	8-759-523-96	s	IC TC74VHC86FT(EL)
IC402	8-759-592-42	s	IC TC7SZ00FU(TE85R)
IC403	8-759-592-42	s	IC TC7SZ00FU(TE85R)
IC404	6-700-804-01	s	IC SN74LVC574APWR
IC405	6-700-804-01	s	IC SN74LVC574APWR
IC406	6-700-804-01	s	IC SN74LVC574APWR
IC407	6-700-804-01	s	IC SN74LVC574APWR
IC408	6-700-804-01	s	IC SN74LVC574APWR
IC409	6-700-804-01	s	IC SN74LVC574APWR
IC411	8-759-592-42	s	IC TC7SZ00FU(TE85R)
IC452	6-701-874-01	s	IC IDT71V016SA15PHG-TL
IC453	8-759-592-42	s	IC TC7SZ00FU(TE85R)
IC454	8-759-592-42	s	IC TC7SZ00FU(TE85R)
IC455	8-759-592-42	s	IC TC7SZ00FU(TE85R)
IC502	6-706-471-01	s	IC THS5661AIPWR
IC504	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC505	6-700-804-01	s	IC SN74LVC574APWR
IC506	6-700-804-01	s	IC SN74LVC574APWR
IC507	6-700-804-01	s	IC SN74LVC574APWR
IC510	8-759-675-47	s	IC SN74LVC04APWR
IC513	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC514	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC515	6-706-484-01	s	IC TC7SH04FU(T5RSOYJF)
IC601	6-709-435-01	s	IC IS42S32200C1-6TL-TR
IC602	6-709-435-01	s	IC IS42S32200C1-6TL-TR
IC603	6-709-435-01	s	IC IS42S32200C1-6TL-TR
IC604	6-709-435-01	s	IC IS42S32200C1-6TL-TR
IC701	6-702-787-01	s	IC UPD6467GR-525-E2
IC702	6-702-787-01	s	IC UPD6467GR-525-E2
IC703	6-702-787-01	s	IC UPD6467GR-525-E2
IC803	6-708-538-01	s	IC CDCVF2510APWR
IC809	6-706-484-01	s	IC TC7SH04FU(T5RSOYJF)
IC810	6-706-484-01	s	IC TC7SH04FU(T5RSOYJF)
IC811	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC812	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC813	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC814	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC901	8-759-472-43	s	IC 74VHC245MTCX
JC1	1-218-990-81	s	CONDUCTOR, CHIP (1005)
L1	1-416-344-21	s	COIL, CHOKE 10UH
L2	1-416-344-21	s	COIL, CHOKE 10UH

(DRX-5 BOARD suffix 14)

Ref. No. or Q'ty	Part No.	SP	Description
L3	1-416-344-21	s	COIL, CHOKE 10UH
L4	1-416-344-21	s	COIL, CHOKE 10UH
L5	1-416-344-21	s	COIL, CHOKE 10UH
L6	1-416-344-21	s	COIL, CHOKE 10UH
L80	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L201	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L202	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L203	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L401	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L402	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L403	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L450	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L451	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L452	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L501	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L502	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L503	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L504	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L505	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L601	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L602	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L603	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L604	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L701	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L702	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L703	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L704	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L705	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L911	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L912	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L913	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
Q1	8-729-209-73	s	TRANSISTOR 2SA1213Y-TE12L
Q2	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q3	8-729-209-73	s	TRANSISTOR 2SA1213Y-TE12L
Q4	8-729-209-73	s	TRANSISTOR 2SA1213Y-TE12L
Q5	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q6	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q7	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q202	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q203	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q204	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q205	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q206	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q207	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q208	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q209	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q210	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q211	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
R1	1-208-871-81	s	RES, CHIP 220 (1005)
R2	1-208-871-81	s	RES, CHIP 220 (1005)
R3	1-208-863-81	s	RES, CHIP 100 (1005)
R4	1-208-863-81	s	RES, CHIP 100 (1005)
R5	1-208-863-81	s	RES, CHIP 100 (1005)
R6	1-208-863-81	s	RES, CHIP 100 (1005)
R7	1-208-871-81	s	RES, CHIP 220 (1005)
R8	1-208-871-81	s	RES, CHIP 220 (1005)
R9	1-208-923-81	s	RES, CHIP 33K (1005)
R10	1-208-923-81	s	RES, CHIP 33K (1005)

(DRX-5 BOARD suffix 14)

Ref. No. or Q'ty	Part No.	SP	Description
R11	1-208-923-81	s	RES, CHIP 33K (1005)
R12	1-208-923-81	s	RES, CHIP 33K (1005)
R13	1-208-923-81	s	RES, CHIP 33K (1005)
R14	1-208-923-81	s	RES, CHIP 33K (1005)
R15	1-208-919-81	s	RES, CHIP 22K (1005)
R16	1-208-907-81	s	RES, CHIP 6.8K (1005)
R17	1-208-923-81	s	RES, CHIP 33K (1005)
R18	1-208-919-81	s	RES, CHIP 22K (1005)
R19	1-208-907-81	s	RES, CHIP 6.8K (1005)
R20	1-208-923-81	s	RES, CHIP 33K (1005)
R21	1-208-931-81	s	RES, CHIP 68K (1005)
R22	1-208-931-81	s	RES, CHIP 68K (1005)
R23	1-208-927-81	s	RES, CHIP 47K (1005)
R24	1-208-923-81	s	RES, CHIP 33K (1005)
R25	1-208-895-81	s	RES, CHIP 2.2K (1005)
R26	1-208-915-81	s	RES, CHIP 15K (1005)
R27	1-208-915-81	s	RES, CHIP 15K (1005)
R28	1-208-919-81	s	RES, CHIP 22K (1005)
R29	1-208-895-81	s	RES, CHIP 2.2K (1005)
R30	1-208-931-81	s	RES, CHIP 68K (1005)
R31	1-208-931-81	s	RES, CHIP 68K (1005)
R32	1-208-931-81	s	RES, CHIP 68K (1005)
R33	1-208-911-81	s	RES, CHIP 10K (1005)
R34	1-208-895-81	s	RES, CHIP 2.2K (1005)
R35	1-208-915-81	s	RES, CHIP 15K (1005)
R36	1-208-923-81	s	RES, CHIP 33K (1005)
R37	1-208-915-81	s	RES, CHIP 15K (1005)
R38	1-208-923-81	s	RES, CHIP 33K (1005)
R40	1-208-891-81	s	RES, CHIP 1.5K (1005)
R41	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R42	1-208-863-81	s	RES, CHIP 100 (1005)
R43	1-208-891-81	s	RES, CHIP 1.5K (1005)
R44	1-208-911-81	s	RES, CHIP 10K (1005)
R45	1-208-863-81	s	RES, CHIP 100 (1005)
R46	1-208-891-81	s	RES, CHIP 1.5K (1005)
R47	1-208-911-81	s	RES, CHIP 10K (1005)
R48	1-208-863-81	s	RES, CHIP 100 (1005)
R49	1-208-911-81	s	RES, CHIP 10K (1005)
R50	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R51	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R52	1-208-899-81	s	RES, CHIP 3.3K (1005)
R53	1-208-919-81	s	RES, CHIP 22K (1005)
R54	1-208-911-81	s	RES, CHIP 10K (1005)
R55	1-208-895-81	s	RES, CHIP 2.2K (1005)
R56	1-208-911-81	s	RES, CHIP 10K (1005)
R57	1-208-895-81	s	RES, CHIP 2.2K (1005)
R58	1-208-907-81	s	RES, CHIP 6.8K (1005)
R59	1-208-903-81	s	RES, CHIP 4.7K (1005)
R60	1-208-919-81	s	RES, CHIP 22K (1005)
R61	1-208-911-81	s	RES, CHIP 10K (1005)
R62	1-208-887-81	s	RES, CHIP 1.0K (1005)
R63	1-208-887-81	s	RES, CHIP 1.0K (1005)
R64	1-208-887-81	s	RES, CHIP 1.0K (1005)
R65	1-208-863-81	s	RES, CHIP 100 (1005)
R66	1-208-887-81	s	RES, CHIP 1.0K (1005)
R67	1-208-887-81	s	RES, CHIP 1.0K (1005)
R68	1-208-871-81	s	RES, CHIP 220 (1005)
R69	1-208-871-81	s	RES, CHIP 220 (1005)
R80	1-208-919-81	s	RES, CHIP 22K (1005)

(DRX-5 BOARD suffix 14)

Ref. No. or Q'ty	Part No.	SP	Description
R81	1-208-895-81	s	RES, CHIP 2.2K (1005)
R82	1-208-895-81	s	RES, CHIP 2.2K (1005)
R83	1-208-927-81	s	RES, CHIP 47K (1005)
R84	1-208-895-81	s	RES, CHIP 2.2K (1005)
R111	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R112	1-220-882-81	s	RES, CHIP 33 (1005)
R113	1-208-915-81	s	RES, CHIP 15K (1005)
R116	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R118	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R119	1-208-871-81	s	RES, CHIP 220 (1005)
R120	1-208-855-81	s	RES, CHIP 47 (1005)
R121	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R122	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R123	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R124	1-208-887-81	s	RES, CHIP 1.0K (1005)
R125	1-208-887-81	s	RES, CHIP 1.0K (1005)
R127	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R129	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R130	1-208-887-81	s	RES, CHIP 1.0K (1005)
R131	1-208-887-81	s	RES, CHIP 1.0K (1005)
R132	1-208-887-81	s	RES, CHIP 1.0K (1005)
R133	1-208-863-81	s	RES, CHIP 100 (1005)
R135	1-208-856-81	s	RES, CHIP 51 (1005)
R136	1-208-856-81	s	RES, CHIP 51 (1005)
R137	1-220-870-81	s	RES, CHIP 10 (1005)
R138	1-220-870-81	s	RES, CHIP 10 (1005)
R161	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R162	1-220-882-81	s	RES, CHIP 33 (1005)
R163	1-208-915-81	s	RES, CHIP 15K (1005)
R166	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R168	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R169	1-208-871-81	s	RES, CHIP 220 (1005)
R170	1-208-855-81	s	RES, CHIP 47 (1005)
R171	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R172	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R173	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R174	1-208-887-81	s	RES, CHIP 1.0K (1005)
R175	1-208-887-81	s	RES, CHIP 1.0K (1005)
R177	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R179	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R180	1-208-887-81	s	RES, CHIP 1.0K (1005)
R181	1-208-887-81	s	RES, CHIP 1.0K (1005)
R182	1-208-887-81	s	RES, CHIP 1.0K (1005)
R183	1-208-863-81	s	RES, CHIP 100 (1005)
R185	1-208-856-81	s	RES, CHIP 51 (1005)
R186	1-208-856-81	s	RES, CHIP 51 (1005)
R187	1-220-870-81	s	RES, CHIP 10 (1005)
R188	1-220-870-81	s	RES, CHIP 10 (1005)
R191	1-208-863-81	s	RES, CHIP 100 (1005)
R192	1-208-863-81	s	RES, CHIP 100 (1005)
R202	1-208-863-81	s	RES, CHIP 100 (1005)
R203	1-208-871-81	s	RES, CHIP 220 (1005)
R204	1-208-871-81	s	RES, CHIP 220 (1005)
R205	1-220-870-81	s	RES, CHIP 10 (1005)
R206	1-208-895-81	s	RES, CHIP 2.2K (1005)
R207	1-208-927-81	s	RES, CHIP 47K (1005)
R208	1-208-927-81	s	RES, CHIP 47K (1005)
R209	1-208-887-81	s	RES, CHIP 1.0K (1005)
R210	1-208-927-81	s	RES, CHIP 47K (1005)

(DRX-5 BOARD suffix 14)

Ref. No. or Q'ty	Part No.	SP	Description
R211	1-208-887-81	s	RES, CHIP 1.0K (1005)
R212	1-208-927-81	s	RES, CHIP 47K (1005)
R213	1-208-887-81	s	RES, CHIP 1.0K (1005)
R214	1-208-927-81	s	RES, CHIP 47K (1005)
R215	1-208-903-81	s	RES, CHIP 4.7K (1005)
R216	1-208-927-81	s	RES, CHIP 47K (1005)
R217	1-208-903-81	s	RES, CHIP 4.7K (1005)
R218	1-208-927-81	s	RES, CHIP 47K (1005)
R219	1-208-887-81	s	RES, CHIP 1.0K (1005)
R221	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R222	1-208-927-81	s	RES, CHIP 47K (1005)
R223	1-208-935-81	s	RES, CHIP 100K (1005)
R225	1-208-935-81	s	RES, CHIP 100K (1005)
R227	1-208-887-81	s	RES, CHIP 1.0K (1005)
R228	1-208-935-81	s	RES, CHIP 100K (1005)
R231	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R232	1-208-927-81	s	RES, CHIP 47K (1005)
R233	1-208-887-81	s	RES, CHIP 1.0K (1005)
R234	1-208-927-81	s	RES, CHIP 47K (1005)
R235	1-208-887-81	s	RES, CHIP 1.0K (1005)
R236	1-208-927-81	s	RES, CHIP 47K (1005)
R237	1-208-887-81	s	RES, CHIP 1.0K (1005)
R239	1-208-863-81	s	RES, CHIP 100 (1005)
R250	1-220-870-81	s	RES, CHIP 10 (1005)
R251	1-208-927-81	s	RES, CHIP 47K (1005)
R252	1-208-863-81	s	RES, CHIP 100 (1005)
R253	1-208-863-81	s	RES, CHIP 100 (1005)
R254	1-208-863-81	s	RES, CHIP 100 (1005)
R301	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R305	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R306	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R307	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R310	1-208-911-81	s	RES, CHIP 10K (1005)
R311	1-208-911-81	s	RES, CHIP 10K (1005)
R312	1-208-911-81	s	RES, CHIP 10K (1005)
R313	1-208-911-81	s	RES, CHIP 10K (1005)
R314	1-208-911-81	s	RES, CHIP 10K (1005)
R315	1-208-887-81	s	RES, CHIP 1.0K (1005)
R316	1-208-887-81	s	RES, CHIP 1.0K (1005)
R401	1-220-870-81	s	RES, CHIP 10 (1005)
R402	1-208-935-81	s	RES, CHIP 100K (1005)
R403	1-208-895-81	s	RES, CHIP 2.2K (1005)
R404	1-208-935-81	s	RES, CHIP 100K (1005)
R405	1-220-870-81	s	RES, CHIP 10 (1005)
R406	1-220-870-81	s	RES, CHIP 10 (1005)
R407	1-220-870-81	s	RES, CHIP 10 (1005)
R408	1-220-870-81	s	RES, CHIP 10 (1005)
R411	1-220-870-81	s	RES, CHIP 10 (1005)
R412	1-220-870-81	s	RES, CHIP 10 (1005)
R413	1-220-870-81	s	RES, CHIP 10 (1005)
R417	1-208-911-81	s	RES, CHIP 10K (1005)
R418	1-208-887-81	s	RES, CHIP 1.0K (1005)
R419	1-208-863-81	s	RES, CHIP 100 (1005)
R420	1-220-870-81	s	RES, CHIP 10 (1005)
R450	1-220-870-81	s	RES, CHIP 10 (1005)
R451	1-220-878-81	s	RES, CHIP 22 (1005)
R454	1-220-870-81	s	RES, CHIP 10 (1005)
R455	1-220-870-81	s	RES, CHIP 10 (1005)
R456	1-220-870-81	s	RES, CHIP 10 (1005)

(DRX-5 BOARD suffix 14)

Ref. No. or Q'ty	Part No.	SP	Description
R457	1-208-911-81	s	RES, CHIP 10K (1005)
R458	1-208-887-81	s	RES, CHIP 1.0K (1005)
R460	1-220-870-81	s	RES, CHIP 10 (1005)
R463	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R470	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R501	1-208-863-81	s	RES, CHIP 100 (1005)
R502	1-208-911-81	s	RES, CHIP 10K (1005)
R504	1-208-911-81	s	RES, CHIP 10K (1005)
R505	1-208-863-81	s	RES, CHIP 100 (1005)
R506	1-220-870-81	s	RES, CHIP 10 (1005)
R507	1-208-863-81	s	RES, CHIP 100 (1005)
R508	1-208-863-81	s	RES, CHIP 100 (1005)
R509	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R512	1-208-955-81	s	RES, CHIP 680K (1005)
R514	1-208-935-81	s	RES, CHIP 100K (1005)
R515	1-208-855-81	s	RES, CHIP 47 (1005)
R516	1-208-899-81	s	RES, CHIP 3.3K (1005)
R517	1-208-899-81	s	RES, CHIP 3.3K (1005)
R518	1-208-899-81	s	RES, CHIP 3.3K (1005)
R519	1-208-875-81	s	RES, CHIP 330 (1005)
R520	1-208-883-81	s	RES, CHIP 680 (1005)
R521	1-208-911-81	s	RES, CHIP 10K (1005)
R522	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R524	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R525	1-208-875-81	s	RES, CHIP 330 (1005)
R526	1-208-879-81	s	RES, CHIP 470 (1005)
R527	1-208-887-81	s	RES, CHIP 1.0K (1005)
R528	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R529	1-208-911-81	s	RES, CHIP 10K (1005)
R530	1-208-883-81	s	RES, CHIP 680 (1005)
R532	1-208-883-81	s	RES, CHIP 680 (1005)
R533	1-220-870-81	s	RES, CHIP 10 (1005)
R534	1-220-870-81	s	RES, CHIP 10 (1005)
R536	1-208-875-81	s	RES, CHIP 330 (1005)
R537	1-208-927-81	s	RES, CHIP 47K (1005)
R541	1-220-870-81	s	RES, CHIP 10 (1005)
R701	1-220-870-81	s	RES, CHIP 10 (1005)
R703	1-220-870-81	s	RES, CHIP 10 (1005)
R705	1-208-863-81	s	RES, CHIP 100 (1005)
R706	1-208-863-81	s	RES, CHIP 100 (1005)
R707	1-208-863-81	s	RES, CHIP 100 (1005)
R708	1-208-863-81	s	RES, CHIP 100 (1005)
R709	1-208-863-81	s	RES, CHIP 100 (1005)
R710	1-208-863-81	s	RES, CHIP 100 (1005)
R711	1-208-863-81	s	RES, CHIP 100 (1005)
R712	1-208-863-81	s	RES, CHIP 100 (1005)
R713	1-208-863-81	s	RES, CHIP 100 (1005)
R714	1-220-870-81	s	RES, CHIP 10 (1005)
R715	1-220-870-81	s	RES, CHIP 10 (1005)
R716	1-220-870-81	s	RES, CHIP 10 (1005)
R718	1-208-863-81	s	RES, CHIP 100 (1005)
R719	1-208-863-81	s	RES, CHIP 100 (1005)
R721	1-208-863-81	s	RES, CHIP 100 (1005)
R722	1-208-863-81	s	RES, CHIP 100 (1005)
R723	1-208-863-81	s	RES, CHIP 100 (1005)
R724	1-208-863-81	s	RES, CHIP 100 (1005)
R725	1-208-863-81	s	RES, CHIP 100 (1005)
R726	1-208-863-81	s	RES, CHIP 100 (1005)
R727	1-208-863-81	s	RES, CHIP 100 (1005)

(DRX-5 BOARD suffix 14)

Ref. No. or Q'ty	Part No.	SP	Description
R728	1-208-863-81	s	RES, CHIP 100 (1005)
R729	1-208-863-81	s	RES, CHIP 100 (1005)
R730	1-208-863-81	s	RES, CHIP 100 (1005)
R731	1-208-863-81	s	RES, CHIP 100 (1005)
R732	1-208-863-81	s	RES, CHIP 100 (1005)
R733	1-208-863-81	s	RES, CHIP 100 (1005)
R734	1-208-863-81	s	RES, CHIP 100 (1005)
R735	1-208-863-81	s	RES, CHIP 100 (1005)
R736	1-208-863-81	s	RES, CHIP 100 (1005)
R737	1-208-863-81	s	RES, CHIP 100 (1005)
R738	1-208-863-81	s	RES, CHIP 100 (1005)
R740	1-220-870-81	s	RES, CHIP 10 (1005)
R741	1-220-870-81	s	RES, CHIP 10 (1005)
R742	1-220-870-81	s	RES, CHIP 10 (1005)
R743	1-208-863-81	s	RES, CHIP 100 (1005)
R744	1-208-863-81	s	RES, CHIP 100 (1005)
R751	1-208-863-81	s	RES, CHIP 100 (1005)
R752	1-208-863-81	s	RES, CHIP 100 (1005)
R753	1-208-863-81	s	RES, CHIP 100 (1005)
R755	1-208-863-81	s	RES, CHIP 100 (1005)
R756	1-208-863-81	s	RES, CHIP 100 (1005)
R801	1-220-870-81	s	RES, CHIP 10 (1005)
R802	1-208-895-81	s	RES, CHIP 2.2K (1005)
R804	1-208-879-81	s	RES, CHIP 470 (1005)
R807	1-220-870-81	s	RES, CHIP 10 (1005)
R808	1-220-870-81	s	RES, CHIP 10 (1005)
R809	1-220-870-81	s	RES, CHIP 10 (1005)
R812	1-220-870-81	s	RES, CHIP 10 (1005)
R813	1-220-870-81	s	RES, CHIP 10 (1005)
R814	1-220-870-81	s	RES, CHIP 10 (1005)
R832	1-220-870-81	s	RES, CHIP 10 (1005)
R855	1-220-870-81	s	RES, CHIP 10 (1005)
R856	1-220-870-81	s	RES, CHIP 10 (1005)
R859	1-220-870-81	s	RES, CHIP 10 (1005)
R860	1-220-870-81	s	RES, CHIP 10 (1005)
R861	1-220-870-81	s	RES, CHIP 10 (1005)
R901	1-208-911-81	s	RES, CHIP 10K (1005)
R902	1-208-887-81	s	RES, CHIP 1.0K (1005)
R903	1-220-870-81	s	RES, CHIP 10 (1005)
R904	1-220-870-81	s	RES, CHIP 10 (1005)
R905	1-220-870-81	s	RES, CHIP 10 (1005)
R911	1-220-870-81	s	RES, CHIP 10 (1005)
R912	1-220-870-81	s	RES, CHIP 10 (1005)
R913	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R914	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R915	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R916	1-220-870-81	s	RES, CHIP 10 (1005)
RB105	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB106	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB107	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB108	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB109	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB110	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB155	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB156	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB157	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB158	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB159	1-234-372-21	s	RES, NETWORK 100 (1005X4)

(DRX-5 BOARD suffix 14)

Ref. No. or Q'ty	Part No.	SP	Description
RB160	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB201	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB202	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB203	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB204	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB205	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB206	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB207	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB208	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB209	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB210	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB211	1-234-369-21	s	RES, NETWORK 10 (1005X4)
RB212	1-234-369-21	s	RES, NETWORK 10 (1005X4)
RB213	1-234-369-21	s	RES, NETWORK 10 (1005X4)
RB214	1-234-369-21	s	RES, NETWORK 10 (1005X4)
RB215	1-234-369-21	s	RES, NETWORK 10 (1005X4)
RB216	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB217	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB218	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB219	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB220	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB221	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB222	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB223	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB225	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB226	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB227	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB229	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB230	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB231	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB232	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB233	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB234	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB235	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB236	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB301	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB302	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB401	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB402	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB403	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB404	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB405	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB406	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB407	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB408	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB409	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB410	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB411	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB412	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB413	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB414	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB415	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB416	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB417	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB418	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB419	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB420	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB421	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB422	1-234-372-21	s	RES, NETWORK 100 (1005X4)

(DRX-5 BOARD suffix 14)

Ref. No. or Q'ty	Part No.	SP	Description
RB423	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB424	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB425	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB426	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB427	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB428	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB456	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB457	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB458	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB459	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB460	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB461	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB462	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB463	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB464	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB465	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB466	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB467	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB468	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB469	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB470	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB471	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB472	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB473	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB474	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB475	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB476	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB477	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB478	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB479	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB480	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB481	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB482	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB483	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB484	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB485	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB486	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB487	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB488	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB489	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB490	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB491	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB492	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB511	1-234-369-21	s	RES, NETWORK 10 (1005X4)
RB513	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB514	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB515	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB522	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB523	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB524	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB525	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB526	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB527	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB528	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB529	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB530	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB531	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB532	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB533	1-234-371-21	s	RES, NETWORK 47 (1005X4)

(DRX-5 BOARD suffix 14)

Ref. No. or Q'ty	Part No.	SP	Description
RB601	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB602	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB603	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB604	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB605	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB606	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB607	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB608	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB609	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB610	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB611	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB612	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB613	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB614	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB615	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB616	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB617	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB618	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB619	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB620	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB621	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB622	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB623	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB624	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB625	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB626	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB627	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB628	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB629	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB630	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB631	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB632	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB633	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB634	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB635	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB636	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB637	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB638	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB639	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB640	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB641	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB642	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB643	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB644	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB645	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB646	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB647	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB648	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB649	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB650	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB651	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB652	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB701	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB705	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB706	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB707	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB708	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB901	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB902	1-234-371-21	s	RES, NETWORK 47 (1005X4)

(DRX-5 BOARD suffix 14)

Ref. No. or Q'ty	Part No.	SP	Description
RB903	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB904	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB911	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB912	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB913	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB914	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB915	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RV1	1-225-791-21	s	RES, ADJ, CERMET 5K
S1	1-572-658-21	s	SWITCH, ROTARY
S2	1-692-271-41	s	SWITCH, SLIDE
S4	1-570-711-33	s	SWITCH, SLIDE
THP1	1-533-817-21	s	THERMISTOR
THP2	1-533-817-21	s	THERMISTOR
THP3	1-533-817-21	s	THERMISTOR
THP4	1-533-817-21	s	THERMISTOR
THP5	1-533-817-21	s	THERMISTOR
THP6	1-533-817-21	s	THERMISTOR
THP7	1-533-817-21	s	THERMISTOR
TP1	1-535-877-22	s	CHIP, CHECKER
TP2	1-535-877-22	s	CHIP, CHECKER
TP501	1-535-877-22	s	CHIP, CHECKER
TP801	1-535-877-22	s	CHIP, CHECKER
X101	1-814-162-11	s	OSCILLATOR (VCO)
X151	1-814-162-11	s	OSCILLATOR (VCO)

DRX-5 BOARD (suffix 12, 13, 31)

---

*1: Board No. suffix 12
*2: Board No. suffix 13, 31

Ref. No. or Q'ty	Part No.	SP	Description
2pcs	A-1129-302-A	s	MOUNTED CIRCUIT BOARD, DRX-5
4pcs	7-682-947-01	s	SCREW +PSW 3X6
C1	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C2	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C3	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C4	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C5	1-128-589-21	s	CAP, CHIP ELECT 47MF
C6	1-128-589-21	s	CAP, CHIP ELECT 47MF
C13	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C14	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C17	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C18	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C19	1-100-352-91	s	CAP, CERAMIC 1MF C (1608)
C20	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C21	1-100-352-91	s	CAP, CERAMIC 1MF C (1608)
C22	1-100-352-91	s	CAP, CERAMIC 1MF C (1608)
C23	1-100-352-91	s	CAP, CERAMIC 1MF C (1608)
C24	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C25	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C26	1-100-352-91	s	CAP, CERAMIC 1MF C (1608)
C27	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C28	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C29	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C30	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C31	1-128-589-21	s	CAP, CHIP ELECT 47MF
C32	1-128-589-21	s	CAP, CHIP ELECT 47MF
C33	1-128-589-21	s	CAP, CHIP ELECT 47MF
C34	1-128-589-21	s	CAP, CHIP ELECT 47MF
C35	1-128-589-21	s	CAP, CHIP ELECT 47MF
C36	1-128-589-21	s	CAP, CHIP ELECT 47MF
C37	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3225
C38	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3225
C39	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3225
C40	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C41	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C42	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C43	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C44	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C45	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C46	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C47	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C48	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C49	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C50	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C51	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C52	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C53	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C54	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C55	1-112-015-91	s	CAP, CHIP CERAMIC 47MF B 3225
C56	1-112-015-91	s	CAP, CHIP CERAMIC 47MF B 3225
C57	1-112-015-91	s	CAP, CHIP CERAMIC 47MF B 3225
C58	1-112-015-91	s	CAP, CHIP CERAMIC 47MF B 3225
C59	1-112-015-91	s	CAP, CHIP CERAMIC 47MF B 3225
C60	1-112-015-91	s	CAP, CHIP CERAMIC 47MF B 3225
C61	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C62	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(DRX-5 BOARD suffix 12, 13, 31)

Ref. No. or Q'ty	Part No.	SP	Description
C63	1-112-015-91	s	CAP, CHIP CERAMIC 47MF B 3225
C64	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C65	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C66	1-164-936-81	s	CAP, CHIP CERAMIC 680PF B 1005
C67	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C68	1-164-936-81	s	CAP, CHIP CERAMIC 680PF B 1005
C69	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C70	1-164-936-81	s	CAP, CHIP CERAMIC 680PF B 1005
C71	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C72	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C73	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C80	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C81	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C82	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C83	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C84	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C85	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C86	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C87	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C88	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C89	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C90	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C91	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C92	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C93	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C94	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C101	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C103	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C105	1-164-939-81	s	CAP, CHIPCERAMIC 2200PF B 1005
C106	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C107	1-127-573-91	s	CAP, CHIP CERAMIC 1MF B (2012)
C108	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C109	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C110	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C111	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C112	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C113	1-100-507-91	s	CAP, CERAMIC 4.7MF C (1608)
C114	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C116	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C117	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C118	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C119	1-100-507-91	s	CAP, CERAMIC 4.7MF C (1608)
C120	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C121	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C122	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C123	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C124	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C125	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C126	1-100-507-91	s	CAP, CERAMIC 4.7MF C (1608)
C127	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C128	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C129	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C130	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C133	1-100-507-91	s	CAP, CERAMIC 4.7MF C (1608)
C134	1-100-507-91	s	CAP, CERAMIC 4.7MF C (1608)
C151	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C153	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C155	1-164-939-81	s	CAP, CHIPCERAMIC 2200PF B 1005
C156	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(DRX-5 BOARD suffix 12, 13, 31)

Ref. No. or Q'ty	Part No.	SP	Description
C157	1-127-573-91	s	CAP, CHIP CERAMIC 1MF B (2012)
C158	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C159	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C160	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C161	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C162	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C163	1-100-507-91	s	CAP, CERAMIC 4.7MF C (1608)
C164	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C166	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C167	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C168	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C169	1-100-507-91	s	CAP, CERAMIC 4.7MF C (1608)
C170	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C171	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C172	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C173	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C174	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C175	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C176	1-100-507-91	s	CAP, CERAMIC 4.7MF C (1608)
C177	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C178	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C179	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C180	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C183	1-100-507-91	s	CAP, CERAMIC 4.7MF C (1608)
C184	1-100-507-91	s	CAP, CERAMIC 4.7MF C (1608)
C201	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C202	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C203	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C204	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C205	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C206	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C207	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C208	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C209	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C210	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C211	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C212	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C213	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C214	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C215	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C216	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C217	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C218	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C219	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C251	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C310	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C401	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C402	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C403	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C404	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C405	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C406	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C407	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C408	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C409	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C410	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C411	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C412	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C413	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)

(DRX-5 BOARD suffix 12, 13, 31)

Ref. No. or Q'ty	Part No.	SP	Description
C414	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C415	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C416	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C417	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C418	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C419	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C420	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C421	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C422	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C423	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C424	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C425	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C426	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C427	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C428	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C429	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C430	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C450	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C451	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C452	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C453	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C454	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C455	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C456	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C457	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C458	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C459	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C460	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C461	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C462	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C463	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C464	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C465	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C466	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C467	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C468	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C469	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C470	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C471	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C472	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C473	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C478	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C479	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C501	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C504	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C505	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C507	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C508	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C509	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C510	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C511	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C512	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C513	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C514	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C515	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C517	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C518	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C519	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C520	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(DRX-5 BOARD suffix 12, 13, 31)

Ref. No. or Q'ty	Part No.	SP	Description
C521	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C522	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C523	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C601	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C602	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C603	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C604	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C605	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C606	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C607	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C608	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C609	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C610	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C611	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C612	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C613	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C614	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C615	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C616	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C617	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C618	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C619	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C620	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C621	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C622	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C623	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C624	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C625	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C626	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C627	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C628	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C629	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C630	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C631	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C632	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C701	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C702	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C703	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C704	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C705	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C706	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C707	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C708	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C709	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C710	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C711	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C712	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C713	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C714	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C715	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C716	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C717	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C718	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C719	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C720	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C721	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C722	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C723	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C724	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)

(DRX-5 BOARD suffix 12, 13, 31)

Ref. No. or Q'ty	Part No.	SP	Description
C725	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C726	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C727	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C728	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C729	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C730	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C731	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C732	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C733	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C734	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C735	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C736	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C737	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C738	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C739	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C740	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C741	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C742	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C743	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C744	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C745	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C746	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C747	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C748	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C749	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C750	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C751	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C752	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C753	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C754	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C755	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C756	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C757	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C758	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C759	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C802	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C803	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C804	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C805	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C806	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C821	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C822	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C823	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C824	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C825	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C826	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C901	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C911	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C912	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C913	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C914	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C915	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C916	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C917	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C918	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C919	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C920	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C921	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C922	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)

(DRX-5 BOARD suffix 12, 13, 31)

Ref. No. or Q'ty	Part No.	SP	Description
C923	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C924	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C925	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C926	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C927	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C928	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C929	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C930	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C931	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
CN3	1-764-093-21	o	PIN, CONNECTOR (PC BOARD) 8P
D1	8-719-017-03	s	DIODE 02DZ4.7-TPH3
D2	8-719-017-03	s	DIODE 02DZ4.7-TPH3
D3	8-719-074-31	s	DIODE CL-196YG-CD-T
D201	8-719-074-31	s	DIODE CL-196YG-CD-T
D202	8-719-074-31	s	DIODE CL-196YG-CD-T
D203	8-719-074-31	s	DIODE CL-196YG-CD-T
D204	※2 6-500-008-01	s	DIODE CL-196TLY-CD-T
	※1 8-719-064-41	s	DIODE CL-191Y-CD-T
D205	※2 6-500-008-01	s	DIODE CL-196TLY-CD-T
	※1 8-719-064-41	s	DIODE CL-191Y-CD-T
D206	8-719-074-31	s	DIODE CL-196YG-CD-T
D207	8-719-074-31	s	DIODE CL-196YG-CD-T
D208	8-719-074-31	s	DIODE CL-196YG-CD-T
D209	8-719-074-31	s	DIODE CL-196YG-CD-T
D210	8-719-074-31	s	DIODE CL-196YG-CD-T
E1	1-535-877-22	s	CHIP, CHECKER
E2	1-535-877-22	s	CHIP, CHECKER
E3	1-535-877-22	s	CHIP, CHECKER
E4	1-535-877-22	s	CHIP, CHECKER
FB1	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB2	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB3	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB4	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB5	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB6	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB101	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB102	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB103	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB104	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB105	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB106	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB107	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB108	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB109	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB151	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB152	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB153	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB154	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB155	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB156	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB157	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB158	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB159	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB501	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB502	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB801	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB802	1-469-094-21	s	FERRITE, EMI (SMD) (1608)

(DRX-5 BOARD suffix 12, 13, 31)

Ref. No. or Q'ty	Part No.	SP	Description
FL501	1-233-891-21	s	FILTER, LOW PASS
IC1	8-759-327-01	s	IC NJM062V(TE2)
IC2	6-704-976-01	s	IC ADR381ARTZ-REEL7
IC3	8-759-327-01	s	IC NJM062V(TE2)
IC4	6-701-572-01	s	IC TPS54610PWPR
IC5	6-701-572-01	s	IC TPS54610PWPR
IC6	6-701-572-01	s	IC TPS54610PWPR
IC7	8-759-338-95	s	IC NJM2903V(TE2)
IC80	6-700-655-01	s	IC LT1963ES8#TR
IC81	8-759-592-42	s	IC TC7SZ00FU(TE85R)
IC101	6-703-693-01	s	IC GS1532-CFE3
IC151	6-703-693-01	s	IC GS1532-CFE3
IC201	8-759-472-43	s	IC 74VHC245MTCX
IC202	8-759-472-43	s	IC 74VHC245MTCX
IC203	8-759-472-43	s	IC 74VHC245MTCX
IC205	8-752-392-03	s	IC CXD1095BR
IC206	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC207	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC208	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC210	8-759-363-26	s	IC RN5VD28AA-TL-FA
IC216	8-759-472-39	s	IC 74VHC244MTCX
IC217	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC218	8-759-679-55	s	IC SN74LVC08APWR
IC219	8-759-523-96	s	IC TC74VHC86FT(EL)
IC402	8-759-592-42	s	IC TC7SZ00FU(TE85R)
IC403	8-759-592-42	s	IC TC7SZ00FU(TE85R)
IC404	6-700-804-01	s	IC SN74LVC574APWR
IC405	6-700-804-01	s	IC SN74LVC574APWR
IC406	6-700-804-01	s	IC SN74LVC574APWR
IC407	6-700-804-01	s	IC SN74LVC574APWR
IC408	6-700-804-01	s	IC SN74LVC574APWR
IC409	6-700-804-01	s	IC SN74LVC574APWR
IC411	8-759-592-42	s	IC TC7SZ00FU(TE85R)
IC452	6-704-463-01	s	IC CY7C1021CV33-15ZXCT
IC453	8-759-592-42	s	IC TC7SZ00FU(TE85R)
IC454	8-759-592-42	s	IC TC7SZ00FU(TE85R)
IC455	8-759-592-42	s	IC TC7SZ00FU(TE85R)
IC502	6-706-471-01	s	IC THS5661AIPWR
IC504	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC505	6-700-804-01	s	IC SN74LVC574APWR
IC506	6-700-804-01	s	IC SN74LVC574APWR
IC507	6-700-804-01	s	IC SN74LVC574APWR
IC510	8-759-675-47	s	IC SN74LVC04APWR
IC513	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC514	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC515	6-706-484-01	s	IC TC7SH04FU(T5RSOYJF)
IC601	6-709-435-01	s	IC IS42S32200C1-6TL-TR
IC602	6-709-435-01	s	IC IS42S32200C1-6TL-TR
IC603	6-709-435-01	s	IC IS42S32200C1-6TL-TR
IC604	6-709-435-01	s	IC IS42S32200C1-6TL-TR
IC701	6-702-787-01	s	IC UPD6467GR-525-E2
IC702	6-702-787-01	s	IC UPD6467GR-525-E2
IC703	6-702-787-01	s	IC UPD6467GR-525-E2
IC803	6-708-538-01	s	IC CDCVF2510APWR
IC809	6-706-484-01	s	IC TC7SH04FU(T5RSOYJF)
IC810	6-706-484-01	s	IC TC7SH04FU(T5RSOYJF)
IC811	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC812	8-759-592-49	s	IC TC7SZ125FU(TE85R)

(DRX-5 BOARD suffix 12, 13, 31)

Ref. No. or Q'ty	Part No.	SP	Description
IC813	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC814	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC901	8-759-472-43	s	IC 74VHC245MTCX
JC1	1-218-990-81	s	CONDUCTOR, CHIP (1005)
L1	1-416-344-21	s	COIL, CHOKE 10UH
L2	1-416-344-21	s	COIL, CHOKE 10UH
L3	1-416-344-21	s	COIL, CHOKE 10UH
L4	1-416-344-21	s	COIL, CHOKE 10UH
L5	1-416-344-21	s	COIL, CHOKE 10UH
L6	1-416-344-21	s	COIL, CHOKE 10UH
L80	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L201	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L202	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L203	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L401	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L402	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L403	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L450	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L451	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L452	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L501	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L502	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L503	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L504	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L505	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L601	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L602	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L603	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L604	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L701	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L702	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L703	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L704	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L705	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L911	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L912	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L913	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
Q1	8-729-209-73	s	TRANSISTOR 2SA1213Y-TE12L
Q2	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q3	8-729-209-73	s	TRANSISTOR 2SA1213Y-TE12L
Q4	8-729-209-73	s	TRANSISTOR 2SA1213Y-TE12L
Q5	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q6	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q7	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q202	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q203	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q204	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q205	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q206	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q207	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q208	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q209	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q210	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q211	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
R1	1-208-871-81	s	RES, CHIP 220 (1005)
R2	1-208-871-81	s	RES, CHIP 220 (1005)
R3	1-208-863-81	s	RES, CHIP 100 (1005)

(DRX-5 BOARD suffix 12, 13, 31)

Ref. No. or Q'ty	Part No.	SP	Description
R4	1-208-863-81	s	RES, CHIP 100 (1005)
R5	1-208-863-81	s	RES, CHIP 100 (1005)
R6	1-208-863-81	s	RES, CHIP 100 (1005)
R7	1-208-871-81	s	RES, CHIP 220 (1005)
R8	1-208-871-81	s	RES, CHIP 220 (1005)
R9	1-208-923-81	s	RES, CHIP 33K (1005)
R10	1-208-923-81	s	RES, CHIP 33K (1005)
R11	1-208-923-81	s	RES, CHIP 33K (1005)
R12	1-208-923-81	s	RES, CHIP 33K (1005)
R13	1-208-923-81	s	RES, CHIP 33K (1005)
R14	1-208-923-81	s	RES, CHIP 33K (1005)
R15	1-208-919-81	s	RES, CHIP 22K (1005)
R16	1-208-907-81	s	RES, CHIP 6.8K (1005)
R17	1-208-923-81	s	RES, CHIP 33K (1005)
R18	1-208-919-81	s	RES, CHIP 22K (1005)
R19	1-208-907-81	s	RES, CHIP 6.8K (1005)
R20	1-208-923-81	s	RES, CHIP 33K (1005)
R21	1-208-931-81	s	RES, CHIP 68K (1005)
R22	1-208-931-81	s	RES, CHIP 68K (1005)
R23	1-208-927-81	s	RES, CHIP 47K (1005)
R24	1-208-923-81	s	RES, CHIP 33K (1005)
R25	1-208-895-81	s	RES, CHIP 2.2K (1005)
R26	1-208-915-81	s	RES, CHIP 15K (1005)
R27	1-208-915-81	s	RES, CHIP 15K (1005)
R28	1-208-919-81	s	RES, CHIP 22K (1005)
R29	1-208-895-81	s	RES, CHIP 2.2K (1005)
R30	1-208-931-81	s	RES, CHIP 68K (1005)
R31	1-208-931-81	s	RES, CHIP 68K (1005)
R32	1-208-931-81	s	RES, CHIP 68K (1005)
R33	1-208-911-81	s	RES, CHIP 10K (1005)
R34	1-208-895-81	s	RES, CHIP 2.2K (1005)
R35	1-208-915-81	s	RES, CHIP 15K (1005)
R36	1-208-923-81	s	RES, CHIP 33K (1005)
R37	1-208-915-81	s	RES, CHIP 15K (1005)
R38	1-208-923-81	s	RES, CHIP 33K (1005)
R40	1-208-891-81	s	RES, CHIP 1.5K (1005)
R41	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R42	1-208-863-81	s	RES, CHIP 100 (1005)
R43	1-208-891-81	s	RES, CHIP 1.5K (1005)
R44	1-208-911-81	s	RES, CHIP 10K (1005)
R45	1-208-863-81	s	RES, CHIP 100 (1005)
R46	1-208-891-81	s	RES, CHIP 1.5K (1005)
R47	1-208-911-81	s	RES, CHIP 10K (1005)
R48	1-208-863-81	s	RES, CHIP 100 (1005)
R49	1-208-911-81	s	RES, CHIP 10K (1005)
R50	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R51	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R52	1-208-899-81	s	RES, CHIP 3.3K (1005)
R53	1-208-919-81	s	RES, CHIP 22K (1005)
R54	1-208-911-81	s	RES, CHIP 10K (1005)
R55	1-208-895-81	s	RES, CHIP 2.2K (1005)
R56	1-208-911-81	s	RES, CHIP 10K (1005)
R57	1-208-895-81	s	RES, CHIP 2.2K (1005)
R58	1-208-907-81	s	RES, CHIP 6.8K (1005)
R59	1-208-903-81	s	RES, CHIP 4.7K (1005)
R60	1-208-919-81	s	RES, CHIP 22K (1005)
R61	1-208-911-81	s	RES, CHIP 10K (1005)
R62	1-208-887-81	s	RES, CHIP 1.0K (1005)
R63	1-208-887-81	s	RES, CHIP 1.0K (1005)

(DRX-5 BOARD suffix 12, 13, 31)

Ref. No. or Q'ty	Part No.	SP	Description
R64	1-208-887-81	s	RES, CHIP 1.0K (1005)
R65	1-208-863-81	s	RES, CHIP 100 (1005)
R66	1-218-953-81	s	RES, CHIP 1.0K
R67	1-218-953-81	s	RES, CHIP 1.0K
R68	1-208-871-81	s	RES, CHIP 220 (1005)
R69	1-208-871-81	s	RES, CHIP 220 (1005)
R80	1-208-919-81	s	RES, CHIP 22K (1005)
R81	1-208-895-81	s	RES, CHIP 2.2K (1005)
R82	1-208-895-81	s	RES, CHIP 2.2K (1005)
R83	1-208-927-81	s	RES, CHIP 47K (1005)
R84	1-208-895-81	s	RES, CHIP 2.2K (1005)
R110	1-208-855-81	s	RES, CHIP 47 (1005)
R111	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R113	1-208-915-81	s	RES, CHIP 15K (1005)
R116	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R118	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R119	1-208-871-81	s	RES, CHIP 220 (1005)
R120	1-208-859-81	s	RES, CHIP 68 (1005)
R121	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R122	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R123	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R124	1-208-887-81	s	RES, CHIP 1.0K (1005)
R125	1-208-887-81	s	RES, CHIP 1.0K (1005)
R127	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R129	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R130	1-208-887-81	s	RES, CHIP 1.0K (1005)
R131	1-208-887-81	s	RES, CHIP 1.0K (1005)
R132	1-208-887-81	s	RES, CHIP 1.0K (1005)
R133	1-208-863-81	s	RES, CHIP 100 (1005)
R135	1-208-856-81	s	RES, CHIP 51 (1005)
R136	1-208-856-81	s	RES, CHIP 51 (1005)
R137	1-220-870-81	s	RES, CHIP 10 (1005)
R138	1-220-870-81	s	RES, CHIP 10 (1005)
R160	1-208-855-81	s	RES, CHIP 47 (1005)
R161	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R163	1-208-915-81	s	RES, CHIP 15K (1005)
R166	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R168	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R169	1-208-871-81	s	RES, CHIP 220 (1005)
R170	1-208-859-81	s	RES, CHIP 68 (1005)
R171	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R172	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R173	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R174	1-208-887-81	s	RES, CHIP 1.0K (1005)
R175	1-208-887-81	s	RES, CHIP 1.0K (1005)
R177	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R179	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R180	1-208-887-81	s	RES, CHIP 1.0K (1005)
R181	1-208-887-81	s	RES, CHIP 1.0K (1005)
R182	1-208-887-81	s	RES, CHIP 1.0K (1005)
R183	1-208-863-81	s	RES, CHIP 100 (1005)
R185	1-208-856-81	s	RES, CHIP 51 (1005)
R186	1-208-856-81	s	RES, CHIP 51 (1005)
R187	1-220-870-81	s	RES, CHIP 10 (1005)
R188	1-220-870-81	s	RES, CHIP 10 (1005)
R191	1-208-863-81	s	RES, CHIP 100 (1005)
R192	1-208-863-81	s	RES, CHIP 100 (1005)
R202	1-208-863-81	s	RES, CHIP 100 (1005)
R203	1-208-871-81	s	RES, CHIP 220 (1005)

(DRX-5 BOARD suffix 12, 13, 31)

Ref. No. or Q'ty	Part No.	SP	Description
R204	1-208-871-81	s	RES, CHIP 220 (1005)
R205	1-220-870-81	s	RES, CHIP 10 (1005)
R206	1-208-895-81	s	RES, CHIP 2.2K (1005)
R207	1-208-927-81	s	RES, CHIP 47K (1005)
R208	1-208-927-81	s	RES, CHIP 47K (1005)
R209	1-208-887-81	s	RES, CHIP 1.0K (1005)
R210	1-208-927-81	s	RES, CHIP 47K (1005)
R211	1-208-887-81	s	RES, CHIP 1.0K (1005)
R212	1-208-927-81	s	RES, CHIP 47K (1005)
R213	1-208-887-81	s	RES, CHIP 1.0K (1005)
R214	1-208-927-81	s	RES, CHIP 47K (1005)
R215 *2	1-208-903-81	s	RES, CHIP 4.7K (1005)
*1	1-208-887-81	s	RES, CHIP 1.0K (1005)
R216	1-208-927-81	s	RES, CHIP 47K (1005)
R217 *2	1-208-903-81	s	RES, CHIP 4.7K (1005)
*1	1-208-887-81	s	RES, CHIP 1.0K (1005)
R218	1-208-927-81	s	RES, CHIP 47K (1005)
R219	1-208-887-81	s	RES, CHIP 1.0K (1005)
R221	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R222	1-208-927-81	s	RES, CHIP 47K (1005)
R223	1-208-935-81	s	RES, CHIP 100K (1005)
R225	1-208-935-81	s	RES, CHIP 100K (1005)
R227	1-208-887-81	s	RES, CHIP 1.0K (1005)
R228	1-208-935-81	s	RES, CHIP 100K (1005)
R231	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R232	1-208-927-81	s	RES, CHIP 47K (1005)
R233	1-208-887-81	s	RES, CHIP 1.0K (1005)
R234	1-208-927-81	s	RES, CHIP 47K (1005)
R235	1-208-887-81	s	RES, CHIP 1.0K (1005)
R236	1-208-927-81	s	RES, CHIP 47K (1005)
R237	1-208-887-81	s	RES, CHIP 1.0K (1005)
R239	1-208-863-81	s	RES, CHIP 100 (1005)
R250	1-220-870-81	s	RES, CHIP 10 (1005)
R251	1-208-927-81	s	RES, CHIP 47K (1005)
R252	1-208-863-81	s	RES, CHIP 100 (1005)
R253	1-208-863-81	s	RES, CHIP 100 (1005)
R254	1-208-863-81	s	RES, CHIP 100 (1005)
R301	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R305	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R306	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R307	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R310	1-208-911-81	s	RES, CHIP 10K (1005)
R311	1-208-911-81	s	RES, CHIP 10K (1005)
R312	1-208-911-81	s	RES, CHIP 10K (1005)
R313	1-208-911-81	s	RES, CHIP 10K (1005)
R314	1-208-911-81	s	RES, CHIP 10K (1005)
R315	1-208-887-81	s	RES, CHIP 1.0K (1005)
R316	1-208-887-81	s	RES, CHIP 1.0K (1005)
R401	1-220-870-81	s	RES, CHIP 10 (1005)
R402	1-208-935-81	s	RES, CHIP 100K (1005)
R403	1-208-895-81	s	RES, CHIP 2.2K (1005)
R404	1-208-935-81	s	RES, CHIP 100K (1005)
R405	1-220-870-81	s	RES, CHIP 10 (1005)
R406	1-220-870-81	s	RES, CHIP 10 (1005)
R407	1-220-870-81	s	RES, CHIP 10 (1005)
R408	1-220-870-81	s	RES, CHIP 10 (1005)
R411	1-220-870-81	s	RES, CHIP 10 (1005)
R412	1-220-870-81	s	RES, CHIP 10 (1005)
R413	1-220-870-81	s	RES, CHIP 10 (1005)

(DRX-5 BOARD suffix 12, 13, 31)

Ref. No. or Q'ty	Part No.	SP	Description
R417	1-208-911-81	s	RES, CHIP 10K (1005)
R418	1-208-887-81	s	RES, CHIP 1.0K (1005)
R419	1-208-863-81	s	RES, CHIP 100 (1005)
R420	1-220-870-81	s	RES, CHIP 10 (1005)
R450	1-220-870-81	s	RES, CHIP 10 (1005)
R451	1-220-878-81	s	RES, CHIP 22 (1005)
R454	1-220-870-81	s	RES, CHIP 10 (1005)
R455	1-220-870-81	s	RES, CHIP 10 (1005)
R456	1-220-870-81	s	RES, CHIP 10 (1005)
R457	1-208-911-81	s	RES, CHIP 10K (1005)
R458	1-208-887-81	s	RES, CHIP 1.0K (1005)
R460	1-220-870-81	s	RES, CHIP 10 (1005)
R463	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R470	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R501	1-208-863-81	s	RES, CHIP 100 (1005)
R502	1-208-911-81	s	RES, CHIP 10K (1005)
R504	1-208-911-81	s	RES, CHIP 10K (1005)
R505	1-208-863-81	s	RES, CHIP 100 (1005)
R506	1-220-870-81	s	RES, CHIP 10 (1005)
R507	1-208-863-81	s	RES, CHIP 100 (1005)
R508	1-208-863-81	s	RES, CHIP 100 (1005)
R509	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R512	1-208-955-81	s	RES, CHIP 680K (1005)
R514	1-208-935-81	s	RES, CHIP 100K (1005)
R515	1-208-855-81	s	RES, CHIP 47 (1005)
R516	1-208-899-81	s	RES, CHIP 3.3K (1005)
R517	1-208-899-81	s	RES, CHIP 3.3K (1005)
R518	1-208-899-81	s	RES, CHIP 3.3K (1005)
R519	1-208-875-81	s	RES, CHIP 330 (1005)
R520	1-208-883-81	s	RES, CHIP 680 (1005)
R521	1-208-911-81	s	RES, CHIP 10K (1005)
R522	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R524	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R525	1-208-875-81	s	RES, CHIP 330 (1005)
R526	1-208-879-81	s	RES, CHIP 470 (1005)
R527	1-208-887-81	s	RES, CHIP 1.0K (1005)
R528	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R529	1-208-911-81	s	RES, CHIP 10K (1005)
R530	1-208-883-81	s	RES, CHIP 680 (1005)
R532	1-208-883-81	s	RES, CHIP 680 (1005)
R533	1-220-870-81	s	RES, CHIP 10 (1005)
R534	1-220-870-81	s	RES, CHIP 10 (1005)
R536	1-208-875-81	s	RES, CHIP 330 (1005)
R537	1-208-927-81	s	RES, CHIP 47K (1005)
R541	1-220-870-81	s	RES, CHIP 10 (1005)
R701	1-220-870-81	s	RES, CHIP 10 (1005)
R703	1-220-870-81	s	RES, CHIP 10 (1005)
R705	1-208-863-81	s	RES, CHIP 100 (1005)
R706	1-208-863-81	s	RES, CHIP 100 (1005)
R707	1-208-863-81	s	RES, CHIP 100 (1005)
R708	1-208-863-81	s	RES, CHIP 100 (1005)
R709	1-208-863-81	s	RES, CHIP 100 (1005)
R710	1-208-863-81	s	RES, CHIP 100 (1005)
R711	1-208-863-81	s	RES, CHIP 100 (1005)
R712	1-208-863-81	s	RES, CHIP 100 (1005)
R713	1-208-863-81	s	RES, CHIP 100 (1005)
R714	1-220-870-81	s	RES, CHIP 10 (1005)
R715	1-220-870-81	s	RES, CHIP 10 (1005)
R716	1-220-870-81	s	RES, CHIP 10 (1005)

(DRX-5 BOARD suffix 12, 13, 31)

Ref. No. or Q'ty	Part No.	SP	Description
R718	1-208-863-81	s	RES, CHIP 100 (1005)
R719	1-208-863-81	s	RES, CHIP 100 (1005)
R721	1-208-863-81	s	RES, CHIP 100 (1005)
R722	1-208-863-81	s	RES, CHIP 100 (1005)
R723	1-208-863-81	s	RES, CHIP 100 (1005)
R724	1-208-863-81	s	RES, CHIP 100 (1005)
R725	1-208-863-81	s	RES, CHIP 100 (1005)
R726	1-208-863-81	s	RES, CHIP 100 (1005)
R727	1-208-863-81	s	RES, CHIP 100 (1005)
R728	1-208-863-81	s	RES, CHIP 100 (1005)
R729	1-208-863-81	s	RES, CHIP 100 (1005)
R730	1-208-863-81	s	RES, CHIP 100 (1005)
R731	1-208-863-81	s	RES, CHIP 100 (1005)
R732	1-208-863-81	s	RES, CHIP 100 (1005)
R733	1-208-863-81	s	RES, CHIP 100 (1005)
R734	1-208-863-81	s	RES, CHIP 100 (1005)
R735	1-208-863-81	s	RES, CHIP 100 (1005)
R736	1-208-863-81	s	RES, CHIP 100 (1005)
R737	1-208-863-81	s	RES, CHIP 100 (1005)
R738	1-208-863-81	s	RES, CHIP 100 (1005)
R740	1-220-870-81	s	RES, CHIP 10 (1005)
R741	1-220-870-81	s	RES, CHIP 10 (1005)
R742	1-220-870-81	s	RES, CHIP 10 (1005)
R743	1-208-863-81	s	RES, CHIP 100 (1005)
R744	1-208-863-81	s	RES, CHIP 100 (1005)
R751	1-208-863-81	s	RES, CHIP 100 (1005)
R752	1-208-863-81	s	RES, CHIP 100 (1005)
R753	1-208-863-81	s	RES, CHIP 100 (1005)
R755	1-208-863-81	s	RES, CHIP 100 (1005)
R756	1-208-863-81	s	RES, CHIP 100 (1005)
R801	1-220-870-81	s	RES, CHIP 10 (1005)
R802	1-208-895-81	s	RES, CHIP 2.2K (1005)
R804	1-208-879-81	s	RES, CHIP 470 (1005)
R807	1-220-870-81	s	RES, CHIP 10 (1005)
R808	1-220-870-81	s	RES, CHIP 10 (1005)
R809	1-220-870-81	s	RES, CHIP 10 (1005)
R812	1-220-870-81	s	RES, CHIP 10 (1005)
R813	1-220-870-81	s	RES, CHIP 10 (1005)
R814	1-220-870-81	s	RES, CHIP 10 (1005)
R832	1-220-870-81	s	RES, CHIP 10 (1005)
R855	1-220-870-81	s	RES, CHIP 10 (1005)
R856	1-220-870-81	s	RES, CHIP 10 (1005)
R859	1-220-870-81	s	RES, CHIP 10 (1005)
R860	1-220-870-81	s	RES, CHIP 10 (1005)
R861	1-220-870-81	s	RES, CHIP 10 (1005)
R901	1-208-911-81	s	RES, CHIP 10K (1005)
R902	1-208-887-81	s	RES, CHIP 1.0K (1005)
R903	1-220-870-81	s	RES, CHIP 10 (1005)
R904	1-220-870-81	s	RES, CHIP 10 (1005)
R905	1-220-870-81	s	RES, CHIP 10 (1005)
R911	1-220-870-81	s	RES, CHIP 10 (1005)
R912	1-220-870-81	s	RES, CHIP 10 (1005)
R913	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R914	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R915	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R916	1-220-870-81	s	RES, CHIP 10 (1005)
RB105	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB106	1-234-372-21	s	RES, NETWORK 100 (1005X4)

(DRX-5 BOARD suffix 12, 13, 31)

Ref. No. or Q'ty	Part No.	SP	Description
RB107	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB108	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB109	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB110	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB155	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB156	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB157	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB158	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB159	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB160	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB201	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB202	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB203	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB204	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB205	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB206	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB207	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB208	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB209	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB210	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB211	1-234-369-21	s	RES, NETWORK 10 (1005X4)
RB212	1-234-369-21	s	RES, NETWORK 10 (1005X4)
RB213	1-234-369-21	s	RES, NETWORK 10 (1005X4)
RB214	1-234-369-21	s	RES, NETWORK 10 (1005X4)
RB215	1-234-369-21	s	RES, NETWORK 10 (1005X4)
RB216	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB217	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB218	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB219	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB220	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB221	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB222	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB223	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB225	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB226	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB227	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB229	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB230	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB231	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB232	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB233	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB234	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB235	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB236	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB301	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB302	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB401	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB402	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB403	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB404	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB405	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB406	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB407	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB408	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB409	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB410	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB411	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB412	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB413	1-234-372-21	s	RES, NETWORK 100 (1005X4)

(DRX-5 BOARD suffix 12, 13, 31)

Ref. No. or Q'ty	Part No.	SP	Description
RB414	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB415	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB416	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB417	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB418	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB419	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB420	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB421	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB422	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB423	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB424	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB425	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB426	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB427	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB428	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB456	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB457	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB458	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB459	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB460	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB461	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB462	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB463	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB464	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB465	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB466	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB467	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB468	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB469	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB470	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB471	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB472	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB473	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB474	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB475	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB476	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB477	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB478	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB479	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB480	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB481	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB482	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB483	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB484	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB485	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB486	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB487	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB488	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB489	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB490	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB491	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB492	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB511	1-234-369-21	s	RES, NETWORK 10 (1005X4)
RB513	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB514	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB515	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB522	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB523	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB524	1-234-371-21	s	RES, NETWORK 47 (1005X4)

(DRX-5 BOARD suffix 12, 13, 31)

Ref. No. or Q'ty	Part No.	SP	Description
RB525	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB526	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB527	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB528	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB529	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB530	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB531	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB532	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB533	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB601	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB602	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB603	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB604	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB605	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB606	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB607	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB608	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB609	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB610	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB611	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB612	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB613	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB614	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB615	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB616	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB617	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB618	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB619	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB620	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB621	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB622	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB623	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB624	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB625	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB626	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB627	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB628	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB629	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB630	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB631	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB632	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB633	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB634	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB635	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB636	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB637	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB638	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB639	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB640	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB641	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB642	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB643	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB644	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB645	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB646	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB647	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB648	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB649	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB650	1-234-372-21	s	RES, NETWORK 100 (1005X4)

(DRX-5 BOARD suffix 12, 13, 31)

Ref. No. or Q'ty	Part No.	SP	Description
RB651	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB652	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB701	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB705	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB706	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB707	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB708	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB901	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB902	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB903	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB904	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB911	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB912	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB913	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB914	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB915	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RV1	1-225-791-21	s	RES, ADJ, CERMET 5K
S1	1-572-658-21	s	SWITCH, ROTARY
S2	1-692-271-41	s	SWITCH, SLIDE
S4	1-570-711-33	s	SWITCH, SLIDE
THP1	⚠ 1-533-817-21	s	THERMISTOR
THP2	⚠ 1-533-817-21	s	THERMISTOR
THP3	⚠ 1-533-817-21	s	THERMISTOR
THP4	⚠ 1-533-817-21	s	THERMISTOR
THP5	⚠ 1-533-817-21	s	THERMISTOR
THP6	1-533-817-21	s	THERMISTOR
THP7	1-533-817-21	s	THERMISTOR
TP1	1-535-877-22	s	CHIP, CHECKER
TP2	1-535-877-22	s	CHIP, CHECKER
TP501	1-535-877-22	s	CHIP, CHECKER
TP801	1-535-877-22	s	CHIP, CHECKER
X101	1-795-872-11	s	OSCILLATOR
X151	1-795-872-11	s	OSCILLATOR

DRX-5 BOARD (suffix 11)

Ref. No. or Q'ty	Part No.	SP	Description
2pcs	A-1129-302-A	s	MOUNTED CIRCUIT BOARD, DRX-5
4pcs	7-682-947-01	s	SCREW +PSW 3X6
C1	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C2	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C3	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C4	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C5	1-128-589-11	s	CAPACITOR ELECT 47MF/6.3V(105C
C6	1-128-589-11	s	CAPACITOR ELECT 47MF/6.3V(105C
C13	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C14	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C17	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C18	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C19	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C20	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C21	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C22	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C23	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C24	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C25	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C26	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C27	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C28	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C29	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C30	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C31	1-128-589-11	s	CAPACITOR ELECT 47MF/6.3V(105C
C32	1-128-589-11	s	CAPACITOR ELECT 47MF/6.3V(105C
C33	1-128-589-11	s	CAPACITOR ELECT 47MF/6.3V(105C
C34	1-128-589-11	s	CAPACITOR ELECT 47MF/6.3V(105C
C35	1-128-589-11	s	CAPACITOR ELECT 47MF/6.3V(105C
C36	1-128-589-11	s	CAPACITOR ELECT 47MF/6.3V(105C
C37	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3216
C38	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3216
C39	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3216
C40	1-119-923-11	s	CAPACITOR,CHIP CERAMIC 0.047MF
C41	1-119-923-11	s	CAPACITOR,CHIP CERAMIC 0.047MF
C42	1-119-923-11	s	CAPACITOR,CHIP CERAMIC 0.047MF
C43	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C44	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C45	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C46	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C47	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C48	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C49	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C50	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C51	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C52	1-119-923-11	s	CAPACITOR,CHIP CERAMIC 0.047MF
C53	1-119-923-11	s	CAPACITOR,CHIP CERAMIC 0.047MF
C54	1-119-923-11	s	CAPACITOR,CHIP CERAMIC 0.047MF
C55	1-100-620-91	s	CAPACITOR, CHIP 47MF(3225)
C56	1-100-620-91	s	CAPACITOR, CHIP 47MF(3225)
C57	1-100-620-91	s	CAPACITOR, CHIP 47MF(3225)
C58	1-100-620-91	s	CAPACITOR, CHIP 47MF(3225)
C59	1-100-620-91	s	CAPACITOR, CHIP 47MF(3225)
C60	1-100-620-91	s	CAPACITOR, CHIP 47MF(3225)
C61	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C62	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C63	1-100-620-91	s	CAPACITOR, CHIP 47MF(3225)
C64	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(DRX-5 BOARD suffix 11)

Ref. No. or Q'ty	Part No.	SP	Description
C65	1-107-819-11	s	CAP,CERAMIC 22000PF/16V(1005)
C66	1-164-936-11	s	CAPACITOR,CHIP CERAMIC 680PF
C67	1-107-819-11	s	CAP,CERAMIC 22000PF/16V(1005)
C68	1-164-936-11	s	CAPACITOR,CHIP CERAMIC 680PF
C69	1-107-819-11	s	CAP,CERAMIC 22000PF/16V(1005)
C70	1-164-936-11	s	CAPACITOR,CHIP CERAMIC 680PF
C71	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C72	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C73	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C80	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C81	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C82	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C83	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C84	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C85	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C86	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C87	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C88	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C89	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C90	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C91	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C92	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C93	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C94	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C101	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C103	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C105	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C106	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C107	1-127-573-11	s	CAPACITOR,CERAMIC 1MFB(2012)
C108	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C109	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C110	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C111	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C112	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C113	1-100-507-91	s	CAPACITOR,CERAMIC4.7MF C(1608)
C114	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C116	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C117	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C118	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C119	1-100-507-91	s	CAPACITOR,CERAMIC4.7MF C(1608)
C120	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C121	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C122	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C123	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C124	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C125	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C126	1-100-507-91	s	CAPACITOR,CERAMIC4.7MF C(1608)
C127	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C128	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C129	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C130	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C133	1-100-507-91	s	CAPACITOR,CERAMIC4.7MF C(1608)
C134	1-100-507-91	s	CAPACITOR,CERAMIC4.7MF C(1608)
C151	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C153	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C155	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C156	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C157	1-127-573-11	s	CAPACITOR,CERAMIC 1MFB(2012)
C158	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005

(DRX-5 BOARD suffix 11)

Ref. No. or Q'ty	Part No.	SP	Description
C159	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C160	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C161	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C162	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C163	1-100-507-91	s	CAPACITOR,CERAMIC4.7MF C(1608)
C164	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C166	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C167	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C168	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C169	1-100-507-91	s	CAPACITOR,CERAMIC4.7MF C(1608)
C170	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C171	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C172	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C173	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C174	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C175	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C176	1-100-507-91	s	CAPACITOR,CERAMIC4.7MF C(1608)
C177	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C178	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C179	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C180	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C183	1-100-507-91	s	CAPACITOR,CERAMIC4.7MF C(1608)
C184	1-100-507-91	s	CAPACITOR,CERAMIC4.7MF C(1608)
C201	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C202	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C203	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C204	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C205	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C206	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C207	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C208	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C209	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C210	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C212	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C213	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C214	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C215	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C216	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C217	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C218	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C251	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C310	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C401	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C402	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C403	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C404	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C405	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C406	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C407	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C408	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C409	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C410	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C411	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C412	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C413	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C414	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C415	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C416	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C417	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005

(DRX-5 BOARD suffix 11)

Ref. No. or Q'ty	Part No.	SP	Description
C418	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C419	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C420	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C421	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C422	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C423	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C424	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C425	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C426	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C427	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C428	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C429	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C430	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C450	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C451	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C452	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C453	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C454	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C455	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C456	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C457	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C458	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C459	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C460	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C461	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C462	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C463	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C464	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C465	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C466	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C467	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C468	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C469	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C470	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C471	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C472	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C473	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C478	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C479	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C501	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C504	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C505	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C507	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C508	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C509	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C510	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C511	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C512	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C513	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C514	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C515	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C517	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C518	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C519	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C520	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C521	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C522	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C523	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C601	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)

(DRX-5 BOARD suffix 11)

Ref. No. or Q'ty	Part No.	SP	Description
C602	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C603	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C604	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C605	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C606	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C607	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C608	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C609	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C610	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C611	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C612	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C613	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C614	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C615	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C616	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C617	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C618	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C619	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C620	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C621	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C622	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C623	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C624	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C625	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C626	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C627	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C628	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C629	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C630	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C631	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C632	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C701	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C702	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C703	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C704	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C705	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C706	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C707	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C708	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C709	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C710	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C711	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C712	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C713	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C714	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C715	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C716	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C717	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C718	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C719	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C720	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C721	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C722	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C723	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C724	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C725	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C726	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C727	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C728	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005

(DRX-5 BOARD suffix 11)

Ref. No. or Q'ty	Part No.	SP	Description
C729	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C730	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C731	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C732	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C733	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C734	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C735	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C736	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C737	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C738	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C739	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C740	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C741	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C742	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C743	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C744	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C745	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C746	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C747	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C748	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C749	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C750	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C751	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C752	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C753	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C754	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C755	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C756	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C757	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C758	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C759	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C802	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C803	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C804	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C805	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C806	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C821	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C822	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C823	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C824	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C825	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C826	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C901	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C911	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C912	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C913	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C914	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C915	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C916	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C917	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C918	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C919	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C920	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C921	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C922	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C923	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C924	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C925	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C926	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V

(DRX-5 BOARD suffix 11)

Ref. No. or Q'ty	Part No.	SP	Description
C927	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C928	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C929	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C930	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C931	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
CN3	1-764-093-21	o	PIN, CONNECTOR (PC BOARD) 8P
D1	8-719-017-03	s	DIODE 02DZ4.7-TPH3
D2	8-719-017-03	s	DIODE 02DZ4.7-TPH3
D3	8-719-063-83	s	LED SML-510MWT86
D201	8-719-063-83	s	LED SML-510MWT86
D202	8-719-063-83	s	LED SML-510MWT86
D203	8-719-063-83	s	LED SML-510MWT86
D204	8-719-064-41	s	DIODE CL-191Y-CD-T
D205	8-719-064-41	s	DIODE CL-191Y-CD-T
D206	8-719-063-83	s	LED SML-510MWT86
D207	8-719-063-83	s	LED SML-510MWT86
D208	8-719-063-83	s	LED SML-510MWT86
D209	8-719-063-83	s	LED SML-510MWT86
D210	8-719-063-83	s	LED SML-510MWT86
E1	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
E2	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
E3	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
E4	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
FB1	1-469-094-21	s	FERRITE, EMI (SMD)
FB2	1-469-094-21	s	FERRITE, EMI (SMD)
FB3	1-469-094-21	s	FERRITE, EMI (SMD)
FB4	1-469-094-21	s	FERRITE, EMI (SMD)
FB5	1-469-094-21	s	FERRITE, EMI (SMD)
FB6	1-469-094-21	s	FERRITE, EMI (SMD)
FB101	1-469-094-21	s	FERRITE, EMI (SMD)
FB102	1-469-094-21	s	FERRITE, EMI (SMD)
FB103	1-469-094-21	s	FERRITE, EMI (SMD)
FB104	1-469-094-21	s	FERRITE, EMI (SMD)
FB105	1-469-094-21	s	FERRITE, EMI (SMD)
FB106	1-469-094-21	s	FERRITE, EMI (SMD)
FB107	1-469-094-21	s	FERRITE, EMI (SMD)
FB108	1-469-094-21	s	FERRITE, EMI (SMD)
FB109	1-469-094-21	s	FERRITE, EMI (SMD)
FB151	1-469-094-21	s	FERRITE, EMI (SMD)
FB152	1-469-094-21	s	FERRITE, EMI (SMD)
FB153	1-469-094-21	s	FERRITE, EMI (SMD)
FB154	1-469-094-21	s	FERRITE, EMI (SMD)
FB155	1-469-094-21	s	FERRITE, EMI (SMD)
FB156	1-469-094-21	s	FERRITE, EMI (SMD)
FB157	1-469-094-21	s	FERRITE, EMI (SMD)
FB158	1-469-094-21	s	FERRITE, EMI (SMD)
FB159	1-469-094-21	s	FERRITE, EMI (SMD)
FB501	1-469-094-21	s	FERRITE, EMI (SMD)
FB502	1-469-094-21	s	FERRITE, EMI (SMD)
FB801	1-469-094-21	s	FERRITE, EMI (SMD)
FB802	1-469-094-21	s	FERRITE, EMI (SMD)
FL501	1-233-891-21	s	FILTER, LOW PASS
IC1	8-759-327-01	s	IC NJM062V-TE2
IC2	6-704-976-01	s	IC ADR381ART-REEL7
IC3	8-759-327-01	s	IC NJM062V-TE2
IC4	6-701-572-01	s	IC TPS54610PWPR
IC5	6-701-572-01	s	IC TPS54610PWPR

(DRX-5 BOARD suffix 11)

Ref. No. or Q'ty	Part No.	SP	Description
IC6	6-701-572-01	s	IC TPS54610PWPR
IC7	8-759-338-95	s	IC NJM2903V (TE2)
IC80	6-700-655-01	s	IC LT1963ES8#TR
IC81	8-759-592-42	s	IC TC7SZ00FU(TE85R)
IC101	6-703-693-01	s	IC GS1532-CFE3
IC151	6-703-693-01	s	IC GS1532-CFE3
IC201	8-759-472-43	s	IC 74VHC245MTCX
IC202	8-759-472-43	s	IC 74VHC245MTCX
IC203	8-759-472-43	s	IC 74VHC245MTCX
IC205	8-752-392-03	s	IC CXD1095BR
IC206	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC207	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC208	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC210	8-759-363-26	s	IC RN5VD28AA-TL
IC216	8-759-472-39	s	IC 74VHC244MTCX
IC217	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC402	8-759-592-42	s	IC TC7SZ00FU(TE85R)
IC403	8-759-592-42	s	IC TC7SZ00FU(TE85R)
IC404	6-700-804-01	s	IC SN74LVC574APWR
IC405	6-700-804-01	s	IC SN74LVC574APWR
IC406	6-700-804-01	s	IC SN74LVC574APWR
IC407	6-700-804-01	s	IC SN74LVC574APWR
IC408	6-700-804-01	s	IC SN74LVC574APWR
IC409	6-700-804-01	s	IC SN74LVC574APWR
IC411	8-759-592-42	s	IC TC7SZ00FU(TE85R)
IC452	6-704-463-01	s	IC CY7C1021CV33-15ZXCT
IC453	8-759-592-42	s	IC TC7SZ00FU(TE85R)
IC454	8-759-592-42	s	IC TC7SZ00FU(TE85R)
IC455	8-759-592-42	s	IC TC7SZ00FU(TE85R)
IC502	6-706-471-01	s	IC THS5661AIPWR
IC504	8-759-561-46	s	IC AD8014ART-REEL7
IC505	6-700-804-01	s	IC SN74LVC574APWR
IC506	6-700-804-01	s	IC SN74LVC574APWR
IC507	6-700-804-01	s	IC SN74LVC574APWR
IC510	8-759-675-47	s	IC SN74LVC04APWR
IC513	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC514	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC515	6-706-484-01	s	IC TC7SH04FU(T5RSOYJF)
IC601	6-705-983-01	s	IC IS42S32200B-6TL-TR
IC602	6-705-983-01	s	IC IS42S32200B-6TL-TR
IC603	6-705-983-01	s	IC IS42S32200B-6TL-TR
IC604	6-705-983-01	s	IC IS42S32200B-6TL-TR
IC701	6-702-787-01	s	IC UPD6467GR-525-E2
IC702	6-702-787-01	s	IC UPD6467GR-525-E2
IC703	6-702-787-01	s	IC UPD6467GR-525-E2
IC803	6-708-538-01	s	IC CDCVF2510APWR
IC809	6-706-484-01	s	IC TC7SH04FU(T5RSOYJF)
IC810	6-706-484-01	s	IC TC7SH04FU(T5RSOYJF)
IC811	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC812	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC813	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC814	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC901	8-759-472-43	s	IC 74VHC245MTCX
JC1	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
L1	1-416-344-11	s	COIL, CHOKE 10UH
L2	1-416-344-11	s	COIL, CHOKE 10UH
L3	1-416-344-11	s	COIL, CHOKE 10UH
L4	1-416-344-11	s	COIL, CHOKE 10UH

(DRX-5 BOARD suffix 11)

Ref. No. or Q'ty	Part No.	SP	Description
L5	1-416-344-11	s	COIL, CHOKE 10UH
L6	1-416-344-11	s	COIL, CHOKE 10UH
L80	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L201	1-414-398-11	s	INDUCTOR (SMD) 10UH
L202	1-414-398-11	s	INDUCTOR (SMD) 10UH
L203	1-414-398-11	s	INDUCTOR (SMD) 10UH
L401	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L402	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L403	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L450	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L451	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L452	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L501	1-414-398-11	s	INDUCTOR (SMD) 10UH
L502	1-414-398-11	s	INDUCTOR (SMD) 10UH
L503	1-414-398-11	s	INDUCTOR (SMD) 10UH
L504	1-414-398-11	s	INDUCTOR (SMD) 10UH
L505	1-414-398-11	s	INDUCTOR (SMD) 10UH
L601	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L602	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L603	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L604	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L701	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L702	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L703	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L704	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L705	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L911	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L912	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L913	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
Q1	8-729-230-27	s	TRANSISTOR 2SA1213Y-TE12L
Q2	8-729-927-99	s	TRANSISTOR 2SC4617R
Q3	8-729-230-27	s	TRANSISTOR 2SA1213Y-TE12L
Q4	8-729-230-27	s	TRANSISTOR 2SA1213Y-TE12L
Q5	8-729-927-99	s	TRANSISTOR 2SC4617R
Q6	8-729-927-99	s	TRANSISTOR 2SC4617R
Q7	8-729-927-99	s	TRANSISTOR 2SC4617R
Q202	8-729-927-99	s	TRANSISTOR 2SC4617R
Q203	8-729-927-99	s	TRANSISTOR 2SC4617R
Q204	8-729-927-99	s	TRANSISTOR 2SC4617R
Q205	8-729-927-99	s	TRANSISTOR 2SC4617R
Q206	8-729-927-99	s	TRANSISTOR 2SC4617R
Q207	8-729-927-99	s	TRANSISTOR 2SC4617R
Q208	8-729-927-99	s	TRANSISTOR 2SC4617R
Q209	8-729-927-99	s	TRANSISTOR 2SC4617R
Q210	8-729-927-99	s	TRANSISTOR 2SC4617R
Q211	8-729-927-99	s	TRANSISTOR 2SC4617R
R1	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R2	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R3	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R4	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R5	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R6	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R7	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R8	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R9	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R10	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R11	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R12	1-208-923-11	s	RESISTOR, CHIP 33K (1005)

(DRX-5 BOARD suffix 11)

Ref. No. or Q'ty	Part No.	SP	Description
R13	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R14	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R15	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R16	1-208-703-11	s	RESISTOR,CHIP 6.8K 1/16W(1005)
R17	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R18	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R19	1-208-703-11	s	RESISTOR,CHIP 6.8K 1/16W(1005)
R20	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R21	1-208-931-11	s	RESISTOR, CHIP 68K (1005)
R22	1-208-931-11	s	RESISTOR, CHIP 68K (1005)
R23	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R24	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R25	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R26	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R27	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R28	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R29	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R30	1-208-931-11	s	RESISTOR, CHIP 68K (1005)
R31	1-208-931-11	s	RESISTOR, CHIP 68K (1005)
R32	1-208-931-11	s	RESISTOR, CHIP 68K (1005)
R33	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R34	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R35	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R36	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R37	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R38	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R40	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005
R41	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R42	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R43	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005
R44	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R45	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R46	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005
R47	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R48	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R49	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R50	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R51	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R52	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R53	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R54	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R55	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R56	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R57	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R58	1-208-703-11	s	RESISTOR,CHIP 6.8K 1/16W(1005)
R59	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R60	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R61	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R62	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R63	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R64	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R65	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R66	1-218-953-11	s	RESISTOR, CHIP 1K 1/16W
R67	1-218-953-11	s	RESISTOR, CHIP 1K 1/16W
R68	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R69	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R80	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R81	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R82	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)

(DRX-5 BOARD suffix 11)

Ref. No. or Q'ty	Part No.	SP	Description
R83	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R84	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R110	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R111	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R113	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R116	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R118	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R119	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R120	1-218-939-11	s	RESISTOR, CHIP 68 1/16W (1005)
R121	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R122	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R123	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R124	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R125	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R127	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R129	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R130	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R131	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R132	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R133	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R135	1-208-652-11	s	RESISTOR CHIP 51 1/16W (1005)
R136	1-208-652-11	s	RESISTOR CHIP 51 1/16W (1005)
R137	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R138	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R160	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R161	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R163	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R166	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R168	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R169	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R170	1-218-939-11	s	RESISTOR, CHIP 68 1/16W (1005)
R171	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R172	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R173	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R174	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R175	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R177	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R179	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R180	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R181	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R182	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R183	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R185	1-208-652-11	s	RESISTOR CHIP 51 1/16W (1005)
R186	1-208-652-11	s	RESISTOR CHIP 51 1/16W (1005)
R187	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R188	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R191	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R192	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R202	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R203	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R204	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R205	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R206	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R207	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R208	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R209	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R210	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R211	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R212	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)

(DRX-5 BOARD suffix 11)

Ref. No. or Q'ty	Part No.	SP	Description
R213	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R214	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R215	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R216	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R217	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R218	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R219	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R221	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R222	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R223	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R225	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R227	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R228	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R231	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R232	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R233	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R234	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R235	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R236	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R237	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R239	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R250	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R251	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R252	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R253	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R254	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R301	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R305	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R306	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R307	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R310	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R311	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R312	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R313	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R314	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R315	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R316	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R401	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R402	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R403	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R404	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R405	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R406	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R407	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R408	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R411	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R412	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R413	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R417	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R418	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R419	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R420	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R450	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R451	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R454	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R455	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R456	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R457	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R458	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)

(DRX-5 BOARD suffix 11)

Ref. No. or Q'ty	Part No.	SP	Description
R460	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R463	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R470	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R501	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R502	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R504	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R505	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R506	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R507	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R508	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R509	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R512	1-208-955-11	s	RESISTOR CHIP 680K
R514	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R515	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R516	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R517	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R518	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R519	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R520	1-208-679-11	s	RESISTOR CHIP 680 1/16W (1005)
R521	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R522	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R524	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R525	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R526	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R527	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R528	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R529	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R530	1-208-679-11	s	RESISTOR CHIP 680 1/16W (1005)
R532	1-208-679-11	s	RESISTOR CHIP 680 1/16W (1005)
R533	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R534	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R535	1-208-663-11	s	RESISTOR CHIP 150 1/16W (1005)
R536	1-208-663-11	s	RESISTOR CHIP 150 1/16W (1005)
R537	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R541	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R701	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R703	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R705	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R706	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R707	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R708	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R709	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R710	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R711	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R712	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R713	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R714	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R715	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R716	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R718	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R719	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R721	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R722	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R723	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R724	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R725	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R726	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R727	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R728	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)

(DRX-5 BOARD suffix 11)

Ref. No. or Q'ty	Part No.	SP	Description
R729	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R730	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R731	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R732	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R733	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R734	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R735	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R736	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R737	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R738	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R740	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R741	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R742	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R743	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R744	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R751	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R752	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R753	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R755	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R756	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R801	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R802	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R804	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R807	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R808	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R809	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R812	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R813	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R814	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R832	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R855	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R856	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R859	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R860	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R861	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R901	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R902	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R903	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R904	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R905	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R911	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R912	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R913	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R914	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R915	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R916	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
RB105	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB106	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB107	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB108	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB109	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB110	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB155	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB156	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB157	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB158	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB159	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB160	1-234-372-11	s	RES, NETWORK 100X4 (1005)

(DRX-5 BOARD suffix 11)

Ref. No. or Q'ty	Part No.	SP	Description
RB201	1-234-381-21	s	RES, NETWORK 100KX4 (1005)
RB202	1-234-381-21	s	RES, NETWORK 100KX4 (1005)
RB203	1-234-381-21	s	RES, NETWORK 100KX4 (1005)
RB204	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB205	1-234-381-21	s	RES, NETWORK 100KX4 (1005)
RB206	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB207	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB208	1-234-381-21	s	RES, NETWORK 100KX4 (1005)
RB209	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB210	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB211	1-234-369-21	s	RES, NETWORK 10X4 (1005)
RB212	1-234-369-21	s	RES, NETWORK 10X4 (1005)
RB213	1-234-369-21	s	RES, NETWORK 10X4 (1005)
RB214	1-234-369-21	s	RES, NETWORK 10X4 (1005)
RB215	1-234-369-21	s	RES, NETWORK 10X4 (1005)
RB216	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB217	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB218	1-234-381-21	s	RES, NETWORK 100KX4 (1005)
RB219	1-234-381-21	s	RES, NETWORK 100KX4 (1005)
RB220	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB221	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB222	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB225	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB226	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB227	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB229	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB230	1-234-381-21	s	RES, NETWORK 100KX4 (1005)
RB231	1-234-381-21	s	RES, NETWORK 100KX4 (1005)
RB232	1-234-381-21	s	RES, NETWORK 100KX4 (1005)
RB233	1-234-381-21	s	RES, NETWORK 100KX4 (1005)
RB234	1-234-381-21	s	RES, NETWORK 100KX4 (1005)
RB235	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB236	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB301	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB302	1-234-378-11	s	RES, NETWORK 10KX4 (1005)
RB401	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB402	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB403	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB404	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB405	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB406	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB407	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB408	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB409	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB410	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB411	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB412	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB413	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB414	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB415	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB416	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB417	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB418	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB419	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB420	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB421	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB422	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB423	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB424	1-234-372-11	s	RES, NETWORK 100X4 (1005)

(DRX-5 BOARD suffix 11)

Ref. No. or Q'ty	Part No.	SP	Description
RB425	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB426	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB427	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB428	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB456	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB457	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB458	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB459	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB460	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB461	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB462	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB463	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB464	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB465	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB466	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB467	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB468	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB469	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB470	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB471	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB472	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB473	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB474	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB475	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB476	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB477	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB478	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB479	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB480	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB481	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB482	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB483	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB484	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB485	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB486	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB487	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB488	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB489	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB490	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB491	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB492	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB511	1-234-369-21	s	RES, NETWORK 10X4 (1005)
RB513	1-234-373-21	s	RES, NETWORK 220X4 (1005)
RB514	1-234-373-21	s	RES, NETWORK 220X4 (1005)
RB515	1-234-373-21	s	RES, NETWORK 220X4 (1005)
RB522	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB523	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB524	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB525	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB526	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB527	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB528	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB529	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB530	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB531	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB532	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB533	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB601	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB602	1-234-372-11	s	RES, NETWORK 100X4 (1005)

(DRX-5 BOARD suffix 11)

Ref. No. or Q'ty	Part No.	SP	Description
RB603	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB604	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB605	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB606	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB607	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB608	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB609	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB610	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB611	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB612	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB613	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB614	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB615	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB616	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB617	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB618	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB619	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB620	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB621	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB622	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB623	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB624	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB625	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB626	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB627	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB628	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB629	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB630	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB631	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB632	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB633	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB634	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB635	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB636	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB637	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB638	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB639	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB640	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB641	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB642	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB643	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB644	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB645	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB646	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB647	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB648	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB649	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB650	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB651	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB652	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB701	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB705	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB706	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB707	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB708	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB901	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB902	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB903	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB904	1-234-372-11	s	RES, NETWORK 100X4 (1005)

(DRX-5 BOARD suffix 11)

Ref. No. or Q'ty	Part No.	SP	Description	
RB911	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB912	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB913	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB914	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB915	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RV1	1-225-791-21	s	RES, ADJ, CERMET 5K	
S1	1-572-658-21	s	SWITCH,ROTARY	
S2	1-692-271-31	s	SWITCH, SLIDE	
S4	1-570-711-11	s	SWITCH,SLIDE	
THP1	⚠ 1-533-817-21	s	THERMISTOR	
THP2	⚠ 1-533-817-21	s	THERMISTOR	
THP3	⚠ 1-533-817-21	s	THERMISTOR	
THP4	⚠ 1-533-817-21	s	THERMISTOR	
THP5	⚠ 1-533-817-21	s	THERMISTOR	
THP6	⚠ 1-533-817-21	s	THERMISTOR	
THP7	⚠ 1-533-817-21	s	THERMISTOR	
TP1	1-535-877-22	s	CHIP,CHECKER (TEST POINT)	
TP2	1-535-877-22	s	CHIP,CHECKER (TEST POINT)	
TP501	1-535-877-22	s	CHIP,CHECKER (TEST POINT)	
TP801	1-535-877-22	s	CHIP,CHECKER (TEST POINT)	
X101	1-795-872-11	s	OSCILLATOR	
X151	1-795-872-11	s	OSCILLATOR	

DTX-5 BOARD suffix (11, 12, 31, 32)

---

*1: Board No. suffix 11, 31
*2: Board No. suffix 12, 32

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1129-301-A	s	MOUNTED CIRCUIT BOARD, DTX-5
4pcs	7-682-947-01	s	SCREW +PSW 3X6
C101	1-127-573-91	s	CAP, CHIP CERAMIC 1MF B (2012)
C102	1-127-573-91	s	CAP, CHIP CERAMIC 1MF B (2012)
C103	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C104	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C105	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C106	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C107	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3225
C108	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C109	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3225
C110	1-127-573-91	s	CAP, CHIP CERAMIC 1MF B (2012)
C111	1-127-573-91	s	CAP, CHIP CERAMIC 1MF B (2012)
C112	1-127-573-91	s	CAP, CHIP CERAMIC 1MF B (2012)
C113	1-128-589-21	s	CAP, CHIP ELECT 47MF
C114	1-128-589-21	s	CAP, CHIP ELECT 47MF
C115	1-127-573-91	s	CAP, CHIP CERAMIC 1MF B (2012)
C116	1-128-589-21	s	CAP, CHIP ELECT 47MF
C117	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C118 *1	1-127-738-91	s	CAP, CERAMIC 4700000PF B(3225)
*2	1-127-573-91	s	CAP, CHIP CERAMIC 1MF B (2012)
C119	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C120	1-127-573-91	s	CAP, CHIP CERAMIC 1MF B (2012)
C121	1-128-589-21	s	CAP, CHIP ELECT 47MF
C122	1-127-573-91	s	CAP, CHIP CERAMIC 1MF B (2012)
C123	1-128-589-21	s	CAP, CHIP ELECT 47MF
C124	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C125	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3225
C126	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C127	1-127-573-91	s	CAP, CHIP CERAMIC 1MF B (2012)
C128	1-128-589-21	s	CAP, CHIP ELECT 47MF
C129	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3225
C130	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C131	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C132	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C133	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C134	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C135	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C136	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C137	1-164-936-81	s	CAP, CHIP CERAMIC 680PF B 1005
C138	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C139	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C140	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3225
C141	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3225
C142	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C143	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C144	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C145	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C146	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C147	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C148	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C149	1-164-936-81	s	CAP, CHIP CERAMIC 680PF B 1005
C150	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C151	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C152	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3225
C154	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(DTX-5 BOARD suffix 11, 12, 31, 32)

Ref. No. or Q'ty	Part No.	SP	Description
C155	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C156	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C157	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C158	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C159	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C160	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C161	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C162	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C163	1-128-589-21	s	CAP, CHIP ELECT 47MF
C164	1-128-589-21	s	CAP, CHIP ELECT 47MF
C165	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C201	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C202	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C203	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C204	1-164-939-81	s	CAP, CHIPCERAMIC 2200PF B 1005
C205	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C207 *2	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C208	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C209	1-100-507-91	s	CAP, CERAMIC 4.7MF C (1608)
C210	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C211	1-100-507-91	s	CAP, CERAMIC 4.7MF C (1608)
C212	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C213	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C215	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C216	1-127-573-91	s	CAP, CHIP CERAMIC 1MF B (2012)
C217	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C218 *2	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C219	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C220	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C221 *1	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
*2	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C222	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C223	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C224	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C225	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C226	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C227	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C228	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C251	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C252	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C253	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C254	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C255	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C256	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C257	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C258	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C259	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C260	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C261	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C262	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C263	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C264	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C265	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C266	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C267	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C268	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C269	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C270	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C271	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(DTX-5 BOARD suffix 11, 12, 31, 32)

Ref. No. or Q'ty	Part No.	SP	Description
C272	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C273	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C274	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C275	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C276	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C301	1-128-589-21	s	CAP, CHIP ELECT 47MF
C302	1-128-589-21	s	CAP, CHIP ELECT 47MF
C303	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C304	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C305	1-100-507-91	s	CAP, CERAMIC 4.7MF C (1608)
C306	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C307	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C308	1-128-589-21	s	CAP, CHIP ELECT 47MF
C309	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C310	1-128-589-21	s	CAP, CHIP ELECT 47MF
C311	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C312	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C313	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C315	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C316	1-128-589-21	s	CAP, CHIP ELECT 47MF
C317	1-128-589-21	s	CAP, CHIP ELECT 47MF
C319	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C353	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C354	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C355	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C356	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C357	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C358	1-128-589-21	s	CAP, CHIP ELECT 47MF
C359	1-128-589-21	s	CAP, CHIP ELECT 47MF
C360	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C361	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C362	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C363	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C365	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C367	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C368	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C369	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C370	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C371	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C372	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C374	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C401	1-164-882-81	s	CAP,CHIP CERAMIC 220PF CH 1005
C402	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C403	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C404	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C405	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C406	1-128-589-21	s	CAP, CHIP ELECT 47MF
C407	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C408	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C409	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C410	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C411	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C412	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C413	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C414	1-128-589-21	s	CAP, CHIP ELECT 47MF
C415	1-128-589-21	s	CAP, CHIP ELECT 47MF
C416	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C417	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C418	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(DTX-5 BOARD suffix 11, 12, 31, 32)

Ref. No. or Q'ty	Part No.	SP	Description
C419	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C420	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C421	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C422	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C423	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C424	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C425	1-128-589-21	s	CAP, CHIP ELECT 47MF
C426	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C427	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C428	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C429	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C430	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C431	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C432	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C433	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C434	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C501	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C502	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C503	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C504	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C505	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C506	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C507	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C508	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C509	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C510	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C511	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C512	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C513	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C515	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C516	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C517	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C518	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C519	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C520	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C521	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C522	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C523	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C524	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C525	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C526	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C527	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C528	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C529	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C530	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C531	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C532	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C533	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C534	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C535	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C536	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C537	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C538	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C539	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C540	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C541	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C542	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C601	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C602	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(DTX-5 BOARD suffix 11, 12, 31, 32)

Ref. No. or Q'ty	Part No.	SP	Description
C603	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C604	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C605	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C606	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C607	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C608	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C609	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C610	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C611	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C612	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C701	1-128-589-21	s	CAP, CHIP ELECT 47MF
C702	1-128-589-21	s	CAP, CHIP ELECT 47MF
C703	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C704	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C705	1-100-507-91	s	CAP, CERAMIC 4.7MF C (1608)
C706	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C707	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C708	1-128-589-21	s	CAP, CHIP ELECT 47MF
C709	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C710	1-128-589-21	s	CAP, CHIP ELECT 47MF
C711	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C712	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C713	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C715	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C716	1-128-589-21	s	CAP, CHIP ELECT 47MF
C717	1-128-589-21	s	CAP, CHIP ELECT 47MF
C719	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
CN501	1-764-093-21	o	PIN, CONNECTOR (PC BOARD) 8P
D101	8-719-017-03	s	DIODE 02DZ4.7-TPH3
D102	8-719-017-03	s	DIODE 02DZ4.7-TPH3
D103	8-719-074-31	s	DIODE CL-196YG-CD-T
D301	8-719-820-42	s	DIODE 1SS302-TE85L
D601	8-719-074-31	s	DIODE CL-196YG-CD-T
D602 *1	8-719-064-41	s	DIODE CL-191Y-CD-T
*2	6-500-008-01	s	DIODE CL-196TLY-CD-T
D603	8-719-077-09	s	DIODE CL-196HR-CD-T
D604	8-719-074-31	s	DIODE CL-196YG-CD-T
D605 *1	8-719-064-41	s	DIODE CL-191Y-CD-T
*2	6-500-008-01	s	DIODE CL-196TLY-CD-T
D606	8-719-077-09	s	DIODE CL-196HR-CD-T
D701	8-719-820-42	s	DIODE 1SS302-TE85L
E101	1-535-877-22	s	CHIP, CHECKER
E102	1-535-877-22	s	CHIP, CHECKER
E103	1-535-877-22	s	CHIP, CHECKER
E104	1-535-877-22	s	CHIP, CHECKER
FB101	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB102	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB103	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB104	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB201	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB202	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB203	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB204	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB205	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB206	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB207	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB208 *2	1-469-094-21	s	FERRITE, EMI (SMD) (1608)

(DTX-5 BOARD suffix 11, 12, 31, 32)

Ref. No. or Q'ty	Part No.	SP	Description
FB401	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB402	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB403	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB404	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB503	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB504	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FL301	1-234-076-21	s	FILTER, LOW PASS
FL701	1-234-076-21	s	FILTER, LOW PASS
IC101	8-759-327-01	s	IC NJM062V(TE2)
IC102	6-704-976-01	s	IC ADR381ARTZ-REEL7
IC103	8-759-327-01	s	IC NJM062V(TE2)
IC104	6-701-572-01	s	IC TPS54610PWPR
IC105	6-701-572-01	s	IC TPS54610PWPR
IC106	8-759-338-95	s	IC NJM2903V(TE2)
IC107	8-759-338-95	s	IC NJM2903V(TE2)
IC108	8-759-346-27	s	IC LM45BIM3X
IC109	6-706-482-01	s	IC TC7SH00FU(T5RSOYJF)
IC201 *1	6-709-052-01	s	IC GS1561-CFE3
*2	6-708-295-01	s	IC GS-1559-CBE2
IC251	8-752-078-34	s	IC CXB1342R
IC301	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC302	8-752-349-19	s	IC CXD1176Q-T4
IC351	6-708-506-01	s	IC ML86V7666TBZ03A
IC402	8-759-472-43	s	IC 74VHC245MTCX
IC403	6-700-804-01	s	IC SN74LVC574APWR
IC404	6-700-804-01	s	IC SN74LVC574APWR
IC405	6-700-804-01	s	IC SN74LVC574APWR
IC502	8-759-472-43	s	IC 74VHC245MTCX
IC503	6-700-804-01	s	IC SN74LVC574APWR
IC504	8-759-472-43	s	IC 74VHC245MTCX
IC507	6-702-787-01	s	IC UPD6467GR-525-E2
IC509 *1	6-705-983-01	s	IC IS42S32200B-6TL-TR
*2	6-709-435-01	s	IC IS42S32200C1-6TL-TR
IC510 *1	6-705-983-01	s	IC IS42S32200B-6TL-TR
*2	6-709-435-01	s	IC IS42S32200C1-6TL-TR
IC511	8-759-592-44	s	IC TC7SZ04FU(TE85R)
IC512	8-759-592-44	s	IC TC7SZ04FU(TE85R)
IC513	8-759-592-44	s	IC TC7SZ04FU(TE85R)
IC514	8-759-592-44	s	IC TC7SZ04FU(TE85R)
IC601	8-759-472-43	s	IC 74VHC245MTCX
IC602	8-759-472-43	s	IC 74VHC245MTCX
IC603	8-759-472-43	s	IC 74VHC245MTCX
IC604	8-759-472-18	s	IC 74VHC138MTCX
IC605	8-759-363-26	s	IC RN5VD28AA-TL-FA
IC606	8-752-392-03	s	IC CXD1095BR
IC608	8-759-523-79	s	IC TC74VHC02FT(EL)
IC609	6-706-491-01	s	IC TC7SH86FU(T5RSOYJF)
IC610	8-759-592-44	s	IC TC7SZ04FU(TE85R)
IC611	8-752-392-03	s	IC CXD1095BR
IC701	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC702	8-752-349-19	s	IC CXD1176Q-T4
JC502	1-218-990-81	s	CONDUCTOR, CHIP (1005)
L101	1-416-344-21	s	COIL, CHOKE 10UH
L102	1-416-344-21	s	COIL, CHOKE 10UH
L103	1-416-344-21	s	COIL, CHOKE 10UH
L104	1-416-344-21	s	COIL, CHOKE 10UH
L201	1-414-459-21	s	INDUCTOR, CHIP (S) 4.7NH

(DTX-5 BOARD suffix 11, 12, 31, 32)

Ref. No. or Q'ty	Part No.	SP	Description
L202	1-414-459-21	s	INDUCTOR, CHIP (S) 4.7NH
L251	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L252	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L253	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L254	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L301	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L302	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L303	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L304	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L305	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L306	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L351	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L352	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L353	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L354	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L355	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L356	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L401	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L402	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L501	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L601	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L701	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L702	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L703	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L704	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L705	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L706	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
Q101	8-729-209-73	s	TRANSISTOR 2SA1213Y-TE12L
Q102	8-729-209-77	s	TRANSISTOR 2SC2873Y-TE12L
Q103	8-729-209-73	s	TRANSISTOR 2SA1213Y-TE12L
Q104	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q105	8-729-209-73	s	TRANSISTOR 2SA1213Y-TE12L
Q106	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q107	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q108	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q109	8-729-041-24	s	TRANSISTOR NDS355AN
Q201	8-729-046-30	s	TRANSISTOR 2SC5245-4/5-TL-E
Q202	8-729-046-30	s	TRANSISTOR 2SC5245-4/5-TL-E
Q301	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q302	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q303	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q304	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q351	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q601	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q602	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q603	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q604	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q605	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q606	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q607	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q701	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q702	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q703	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q704	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
R101	1-208-871-81	s	RES, CHIP 220 (1005)
R102	1-208-871-81	s	RES, CHIP 220 (1005)
R103	1-208-923-81	s	RES, CHIP 33K (1005)
R104	1-208-923-81	s	RES, CHIP 33K (1005)

(DTX-5 BOARD suffix 11, 12, 31, 32)

Ref. No. or Q'ty	Part No.	SP	Description
R105	1-208-931-81	s	RES, CHIP 68K (1005)
R106	1-208-931-81	s	RES, CHIP 68K (1005)
R107	1-208-927-81	s	RES, CHIP 47K (1005)
R108	1-208-863-81	s	RES, CHIP 100 (1005)
R109	1-208-863-81	s	RES, CHIP 100 (1005)
R110	1-208-871-81	s	RES, CHIP 220 (1005)
R111	1-208-923-81	s	RES, CHIP 33K (1005)
R112	1-208-923-81	s	RES, CHIP 33K (1005)
R113	1-208-919-81	s	RES, CHIP 22K (1005)
R114 *1	1-208-907-81	s	RES, CHIP 6.8K (1005)
*2	1-208-911-81	s	RES, CHIP 10K (1005)
R115	1-208-923-81	s	RES, CHIP 33K (1005)
R116	1-208-863-81	s	RES, CHIP 100 (1005)
R117	1-208-863-81	s	RES, CHIP 100 (1005)
R118	1-208-871-81	s	RES, CHIP 220 (1005)
R119	1-208-923-81	s	RES, CHIP 33K (1005)
R120	1-208-923-81	s	RES, CHIP 33K (1005)
R121	1-208-931-81	s	RES, CHIP 68K (1005)
R122	1-208-879-81	s	RES, CHIP 470 (1005)
R123	1-208-923-81	s	RES, CHIP 33K (1005)
R124	1-208-931-81	s	RES, CHIP 68K (1005)
R125	1-208-915-81	s	RES, CHIP 15K (1005)
R126	1-208-891-81	s	RES, CHIP 1.5K (1005)
R127	1-208-863-81	s	RES, CHIP 100 (1005)
R128	1-208-911-81	s	RES, CHIP 10K (1005)
R129	1-208-871-81	s	RES, CHIP 220 (1005)
R130	1-208-911-81	s	RES, CHIP 10K (1005)
R131	1-208-887-81	s	RES, CHIP 1.0K (1005)
R132	1-208-931-81	s	RES, CHIP 68K (1005)
R133 *1	1-208-915-81	s	RES, CHIP 15K (1005)
*2	1-208-923-81	s	RES, CHIP 33K (1005)
R134	1-208-891-81	s	RES, CHIP 1.5K (1005)
R135	1-208-863-81	s	RES, CHIP 100 (1005)
R136	1-208-911-81	s	RES, CHIP 10K (1005)
R137	1-208-911-81	s	RES, CHIP 10K (1005)
R138	1-208-903-81	s	RES, CHIP 4.7K (1005)
R139	1-208-887-81	s	RES, CHIP 1.0K (1005)
R140	1-208-923-81	s	RES, CHIP 33K (1005)
R141	1-208-895-81	s	RES, CHIP 2.2K (1005)
R142	1-208-915-81	s	RES, CHIP 15K (1005)
R143	1-208-915-81	s	RES, CHIP 15K (1005)
R144	1-208-919-81	s	RES, CHIP 22K (1005)
R145	1-208-895-81	s	RES, CHIP 2.2K (1005)
R146	1-208-911-81	s	RES, CHIP 10K (1005)
R147	1-208-895-81	s	RES, CHIP 2.2K (1005)
R148	1-208-915-81	s	RES, CHIP 15K (1005)
R149	1-208-919-81	s	RES, CHIP 22K (1005)
R150	1-208-895-81	s	RES, CHIP 2.2K (1005)
R151	1-208-911-81	s	RES, CHIP 10K (1005)
R152	1-208-919-81	s	RES, CHIP 22K (1005)
R153	1-208-911-81	s	RES, CHIP 10K (1005)
R154	1-208-927-81	s	RES, CHIP 47K (1005)
R155	1-208-923-81	s	RES, CHIP 33K (1005)
R156	1-216-817-91	s	RES, CHIP 470 (1608)
R157	1-208-863-81	s	RES, CHIP 100 (1005)
R158 *1	1-218-831-91	s	RES, CHIP 220 (1608)
*2	1-208-871-81	s	RES, CHIP 220 (1005)
R159 *1	1-218-847-91	s	RES, CHIP 1.0K (1608)
*2	1-208-887-81	s	RES, CHIP 1.0K (1005)

(DTX-5 BOARD suffix 11, 12, 31, 32)

Ref. No. or Q'ty	Part No.	SP	Description
R160 *1	1-218-847-91	s	RES, CHIP 1.0K (1608)
*2	1-208-887-81	s	RES, CHIP 1.0K (1005)
R161	1-216-809-91	s	RES, CHIP 100 (1608)
R201	1-208-856-81	s	RES, CHIP 51 (1005)
R202	1-208-856-81	s	RES, CHIP 51 (1005)
R203	1-220-870-81	s	RES, CHIP 10 (1005)
R204	1-208-875-81	s	RES, CHIP 330 (1005)
R205	1-220-870-81	s	RES, CHIP 10 (1005)
R206	1-208-875-81	s	RES, CHIP 330 (1005)
R207	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R208	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R209	1-208-925-81	s	RES, CHIP 39K (1005)
R210	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R212	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R213	1-208-887-81	s	RES, CHIP 1.0K (1005)
R214	1-208-887-81	s	RES, CHIP 1.0K (1005)
R215 *2	1-220-870-81	s	RES, CHIP 10 (1005)
R217	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R218	1-208-871-81	s	RES, CHIP 220 (1005)
R219	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R221	1-208-887-81	s	RES, CHIP 1.0K (1005)
R222	1-208-887-81	s	RES, CHIP 1.0K (1005)
R223	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R224	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R225	1-208-927-81	s	RES, CHIP 47K (1005)
R227 *2	1-208-903-81	s	RES, CHIP 4.7K (1005)
R228 *2	1-208-903-81	s	RES, CHIP 4.7K (1005)
R229 *2	1-208-875-81	s	RES, CHIP 330 (1005)
R230 *2	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R231 *2	1-220-870-81	s	RES, CHIP 10 (1005)
R232 *2	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R251	1-208-856-81	s	RES, CHIP 51 (1005)
R252	1-208-856-81	s	RES, CHIP 51 (1005)
R253	1-208-907-81	s	RES, CHIP 6.8K (1005)
R254	1-208-860-81	s	RES, CHIP 75 (1005)
R255	1-208-860-81	s	RES, CHIP 75 (1005)
R256	1-208-871-81	s	RES, CHIP 220 (1005)
R257	1-208-871-81	s	RES, CHIP 220 (1005)
R258	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R259	1-208-883-81	s	RES, CHIP 680 (1005)
R260	1-208-855-81	s	RES, CHIP 47 (1005)
R261	1-208-895-81	s	RES, CHIP 2.2K (1005)
R262	1-208-895-81	s	RES, CHIP 2.2K (1005)
R263	1-208-895-81	s	RES, CHIP 2.2K (1005)
R264 *1	1-208-887-81	s	RES, CHIP 1.0K (1005)
*2	1-208-891-81	s	RES, CHIP 1.5K (1005)
R265	1-208-927-81	s	RES, CHIP 47K (1005)
R267	1-208-863-81	s	RES, CHIP 100 (1005)
R301	1-208-875-81	s	RES, CHIP 330 (1005)
R302	1-220-882-81	s	RES, CHIP 33 (1005)
R303	1-208-863-81	s	RES, CHIP 100 (1005)
R304	1-208-863-81	s	RES, CHIP 100 (1005)
R305	1-208-891-81	s	RES, CHIP 1.5K (1005)
R306	1-208-891-81	s	RES, CHIP 1.5K (1005)
R307	1-208-935-81	s	RES, CHIP 100K (1005)
R308	1-208-863-81	s	RES, CHIP 100 (1005)
R309	1-208-911-81	s	RES, CHIP 10K (1005)
R310	1-208-887-81	s	RES, CHIP 1.0K (1005)
R311	1-208-871-81	s	RES, CHIP 220 (1005)

(DTX-5 BOARD suffix 11, 12, 31, 32)

Ref. No. or Q'ty	Part No.	SP	Description
R312	1-208-891-81	s	RES, CHIP 1.5K (1005)
R313	1-208-875-81	s	RES, CHIP 330 (1005)
R314	1-208-895-81	s	RES, CHIP 2.2K (1005)
R315	1-208-871-81	s	RES, CHIP 220 (1005)
R316	1-208-863-81	s	RES, CHIP 100 (1005)
R317	1-208-875-81	s	RES, CHIP 330 (1005)
R318	1-208-887-81	s	RES, CHIP 1.0K (1005)
R319	1-208-871-81	s	RES, CHIP 220 (1005)
R320	1-208-879-81	s	RES, CHIP 470 (1005)
R321	1-208-911-81	s	RES, CHIP 10K (1005)
R322	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R323	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R324	1-208-863-81	s	RES, CHIP 100 (1005)
R325	1-220-870-81	s	RES, CHIP 10 (1005)
R351	1-208-875-81	s	RES, CHIP 330 (1005)
R352	1-220-882-81	s	RES, CHIP 33 (1005)
R353	1-208-863-81	s	RES, CHIP 100 (1005)
R354	1-208-891-81	s	RES, CHIP 1.5K (1005)
R355	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R356	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R357	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R358	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R360	1-220-870-81	s	RES, CHIP 10 (1005)
R361	1-220-870-81	s	RES, CHIP 10 (1005)
R363	1-220-870-81	s	RES, CHIP 10 (1005)
R364	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R365	1-208-911-81	s	RES, CHIP 10K (1005)
R366	1-208-911-81	s	RES, CHIP 10K (1005)
R367	1-220-870-81	s	RES, CHIP 10 (1005)
R369	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R371	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R373	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R375	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R377	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R378	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R379	1-208-863-81	s	RES, CHIP 100 (1005)
R381	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R382	1-220-870-81	s	RES, CHIP 10 (1005)
R383	1-220-878-81	s	RES, CHIP 22 (1005)
R385	1-208-863-81	s	RES, CHIP 100 (1005)
R386	1-208-863-81	s	RES, CHIP 100 (1005)
R387	1-208-863-81	s	RES, CHIP 100 (1005)
R388	1-208-927-81	s	RES, CHIP 47K (1005)
R389	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R401	1-208-871-81	s	RES, CHIP 220 (1005)
R402	1-208-871-81	s	RES, CHIP 220 (1005)
R403	1-208-871-81	s	RES, CHIP 220 (1005)
R404	1-208-871-81	s	RES, CHIP 220 (1005)
R405	1-208-871-81	s	RES, CHIP 220 (1005)
R406	1-208-871-81	s	RES, CHIP 220 (1005)
R407	1-208-871-81	s	RES, CHIP 220 (1005)
R408	1-208-871-81	s	RES, CHIP 220 (1005)
R409	1-208-871-81	s	RES, CHIP 220 (1005)
R410	1-208-871-81	s	RES, CHIP 220 (1005)
R411	1-208-871-81	s	RES, CHIP 220 (1005)
R412	1-208-863-81	s	RES, CHIP 100 (1005)
R413	1-208-863-81	s	RES, CHIP 100 (1005)
R414	1-208-863-81	s	RES, CHIP 100 (1005)
R415	1-208-871-81	s	RES, CHIP 220 (1005)

(DTX-5 BOARD suffix 11, 12, 31, 32)

Ref. No. or Q'ty	Part No.	SP	Description
R416	1-208-911-81	s	RES, CHIP 10K (1005)
R417	1-208-895-81	s	RES, CHIP 2.2K (1005)
R418	1-220-870-81	s	RES, CHIP 10 (1005)
R419	1-220-870-81	s	RES, CHIP 10 (1005)
R420	1-220-870-81	s	RES, CHIP 10 (1005)
R422	1-208-871-81	s	RES, CHIP 220 (1005)
R423	1-208-871-81	s	RES, CHIP 220 (1005)
R424	1-208-855-81	s	RES, CHIP 47 (1005)
R425	1-208-855-81	s	RES, CHIP 47 (1005)
R426	1-208-871-81	s	RES, CHIP 220 (1005)
R427	1-208-871-81	s	RES, CHIP 220 (1005)
R428	1-208-871-81	s	RES, CHIP 220 (1005)
R501	1-220-870-81	s	RES, CHIP 10 (1005)
R502	1-208-895-81	s	RES, CHIP 2.2K (1005)
R503	1-220-870-81	s	RES, CHIP 10 (1005)
R505	1-208-895-81	s	RES, CHIP 2.2K (1005)
R507	1-220-870-81	s	RES, CHIP 10 (1005)
R508	1-208-895-81	s	RES, CHIP 2.2K (1005)
R510	1-220-870-81	s	RES, CHIP 10 (1005)
R511	1-220-870-81	s	RES, CHIP 10 (1005)
R512	1-220-870-81	s	RES, CHIP 10 (1005)
R513	1-220-870-81	s	RES, CHIP 10 (1005)
R514	1-208-911-81	s	RES, CHIP 10K (1005)
R515	1-208-911-81	s	RES, CHIP 10K (1005)
R516	1-208-887-81	s	RES, CHIP 1.0K (1005)
R517	1-208-887-81	s	RES, CHIP 1.0K (1005)
R518	1-208-887-81	s	RES, CHIP 1.0K (1005)
R519	1-208-887-81	s	RES, CHIP 1.0K (1005)
R520	1-208-887-81	s	RES, CHIP 1.0K (1005)
R521	1-208-887-81	s	RES, CHIP 1.0K (1005)
R522	1-208-887-81	s	RES, CHIP 1.0K (1005)
R523	1-208-863-81	s	RES, CHIP 100 (1005)
R524	1-208-855-81	s	RES, CHIP 47 (1005)
R525	1-208-871-81	s	RES, CHIP 220 (1005)
R526	1-208-911-81	s	RES, CHIP 10K (1005)
R527	1-208-911-81	s	RES, CHIP 10K (1005)
R528	1-208-871-81	s	RES, CHIP 220 (1005)
R529	1-220-870-81	s	RES, CHIP 10 (1005)
R530	1-220-870-81	s	RES, CHIP 10 (1005)
R531	1-208-871-81	s	RES, CHIP 220 (1005)
R532	1-208-871-81	s	RES, CHIP 220 (1005)
R533	1-208-871-81	s	RES, CHIP 220 (1005)
R536	1-208-871-81	s	RES, CHIP 220 (1005)
R537	1-208-871-81	s	RES, CHIP 220 (1005)
R538	1-220-870-81	s	RES, CHIP 10 (1005)
R539	1-208-895-81	s	RES, CHIP 2.2K (1005)
R540	1-208-863-81	s	RES, CHIP 100 (1005)
R541	1-208-863-81	s	RES, CHIP 100 (1005)
R542	1-208-863-81	s	RES, CHIP 100 (1005)
R545	1-208-863-81	s	RES, CHIP 100 (1005)
R548	1-220-870-81	s	RES, CHIP 10 (1005)
R549	1-208-899-81	s	RES, CHIP 3.3K (1005)
R601	1-208-863-81	s	RES, CHIP 100 (1005)
R602	1-208-863-81	s	RES, CHIP 100 (1005)
R603	1-208-863-81	s	RES, CHIP 100 (1005)
R604	1-208-863-81	s	RES, CHIP 100 (1005)
R606	1-208-927-81	s	RES, CHIP 47K (1005)
R607	1-208-927-81	s	RES, CHIP 47K (1005)
R608	1-208-927-81	s	RES, CHIP 47K (1005)

(DTX-5 BOARD suffix 11, 12, 31, 32)

Ref. No. or Q'ty	Part No.	SP	Description
R609	1-208-927-81	s	RES, CHIP 47K (1005)
R610	1-208-863-81	s	RES, CHIP 100 (1005)
R612	1-208-927-81	s	RES, CHIP 47K (1005)
R613	1-208-927-81	s	RES, CHIP 47K (1005)
R614	1-208-887-81	s	RES, CHIP 1.0K (1005)
R615	1-208-927-81	s	RES, CHIP 47K (1005)
R616 *1	1-208-895-81	s	RES, CHIP 2.2K (1005)
*2	1-208-903-81	s	RES, CHIP 4.7K (1005)
R618	1-208-887-81	s	RES, CHIP 1.0K (1005)
R619	1-208-927-81	s	RES, CHIP 47K (1005)
R621	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R623	1-208-927-81	s	RES, CHIP 47K (1005)
R625	1-208-887-81	s	RES, CHIP 1.0K (1005)
R627	1-208-887-81	s	RES, CHIP 1.0K (1005)
R628	1-208-911-81	s	RES, CHIP 10K (1005)
R629	1-208-927-81	s	RES, CHIP 47K (1005)
R630	1-208-887-81	s	RES, CHIP 1.0K (1005)
R631	1-208-927-81	s	RES, CHIP 47K (1005)
R632 *1	1-208-895-81	s	RES, CHIP 2.2K (1005)
*2	1-208-903-81	s	RES, CHIP 4.7K (1005)
R633	1-208-927-81	s	RES, CHIP 47K (1005)
R634	1-208-911-81	s	RES, CHIP 10K (1005)
R635	1-208-927-81	s	RES, CHIP 47K (1005)
R636	1-208-863-81	s	RES, CHIP 100 (1005)
R637	1-208-863-81	s	RES, CHIP 100 (1005)
R638	1-208-887-81	s	RES, CHIP 1.0K (1005)
R639	1-208-927-81	s	RES, CHIP 47K (1005)
R640	1-208-863-81	s	RES, CHIP 100 (1005)
R701	1-208-875-81	s	RES, CHIP 330 (1005)
R702	1-220-882-81	s	RES, CHIP 33 (1005)
R703	1-208-863-81	s	RES, CHIP 100 (1005)
R704	1-208-863-81	s	RES, CHIP 100 (1005)
R705	1-208-891-81	s	RES, CHIP 1.5K (1005)
R706	1-208-891-81	s	RES, CHIP 1.5K (1005)
R707	1-208-935-81	s	RES, CHIP 100K (1005)
R708	1-208-863-81	s	RES, CHIP 100 (1005)
R709	1-208-911-81	s	RES, CHIP 10K (1005)
R710	1-208-887-81	s	RES, CHIP 1.0K (1005)
R711	1-208-871-81	s	RES, CHIP 220 (1005)
R712	1-208-891-81	s	RES, CHIP 1.5K (1005)
R713	1-208-875-81	s	RES, CHIP 330 (1005)
R714	1-208-895-81	s	RES, CHIP 2.2K (1005)
R715	1-208-871-81	s	RES, CHIP 220 (1005)
R716	1-208-863-81	s	RES, CHIP 100 (1005)
R717	1-208-875-81	s	RES, CHIP 330 (1005)
R718	1-208-887-81	s	RES, CHIP 1.0K (1005)
R719	1-208-871-81	s	RES, CHIP 220 (1005)
R720	1-208-879-81	s	RES, CHIP 470 (1005)
R721	1-208-911-81	s	RES, CHIP 10K (1005)
R722	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R723	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R724	1-208-863-81	s	RES, CHIP 100 (1005)
R725	1-220-870-81	s	RES, CHIP 10 (1005)
RB401	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB402	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB403	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB404	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB405	1-234-373-21	s	RES, NETWORK 220 (1005X4)

(DTX-5 BOARD suffix 11, 12, 31, 32)

Ref. No. or Q'ty	Part No.	SP	Description
RB406	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB407	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB408	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB409	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB410	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB411	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB412	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB413	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB414	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB415	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB416	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB417	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB418	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB419	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB420	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB421	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB422	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB423	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB424	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB501	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB502	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB503	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB504	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB505	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB601	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB602	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB603	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB604	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB605	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB606	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB607	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB608	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB609	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB610	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB611	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB612	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB613	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB614	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB615	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB616	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB617	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB618	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB619	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB620	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB621	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB622	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB623	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB624	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB625	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB626	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB627	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB628	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB629	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB630	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB631	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB632	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB633	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB634	1-234-372-21	s	RES, NETWORK 100 (1005X4)

(DTX-5 BOARD suffix 11, 12, 31, 32)

Ref. No. or Q'ty	Part No.	SP	Description
RV251	1-225-789-21	s	RES, ADJ, CERMET 2K
RV301	1-225-788-21	s	RES, ADJ, CERMET 1K
RV701	1-225-788-21	s	RES, ADJ, CERMET 1K
S601	1-692-271-41	s	SWITCH, SLIDE
S602	1-572-658-21	s	SWITCH, ROTARY
S603	1-762-118-21	s	SWITCH, TOGGLE
S604	1-762-120-21	s	SWITCH, TOGGLE
S605	1-762-120-21	s	SWITCH, TOGGLE
THP101 ⚠	1-533-817-21	s	THERMISTOR
THP102 ⚠	1-533-817-21	s	THERMISTOR
THP103 ⚠	1-533-817-21	s	THERMISTOR
THP104 ⚠	1-533-817-21	s	THERMISTOR
THP105 ⚠	1-533-817-21	s	THERMISTOR
THP106 ⚠	1-533-817-21	s	THERMISTOR
TP201 *2	1-535-877-22	s	CHIP, CHECKER
TP251	1-535-877-22	s	CHIP, CHECKER
TP301	1-535-877-22	s	CHIP, CHECKER
TP351	1-535-877-22	s	CHIP, CHECKER
TP501	1-535-877-22	s	CHIP, CHECKER
TP701	1-535-877-22	s	CHIP, CHECKER
X201 *2	1-795-872-11	s	OSCILLATOR
*1	1-814-162-11	s	OSCILLATOR (VCO)

DU-565 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
C1	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C2	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C3	1-116-174-11	s	CAP, CHIP ELECT 270MF(10X10.5)
C4	1-162-964-91	s	CAP,CHIP CERAMIC 1000PF B 1608
C5	1-162-964-91	s	CAP,CHIP CERAMIC 1000PF B 1608
D1	8-719-069-56	s	DI UDZSUSTE-176.2B
D2	8-719-938-77	s	DIODE SB05-05C-TB-E
L1	1-416-511-21	s	COIL, CHOKE 47.0UH
L2	1-416-511-21	s	COIL, CHOKE 47.0UH
Q1	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q2	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q3	6-552-494-01	s	TR SI2307CDS-T1-GE3
R1	1-208-911-81	s	RES, CHIP 10K (1005)
R2	1-208-935-81	s	RES, CHIP 100K (1005)
R3	1-208-887-81	s	RES, CHIP 1.0K (1005)

EN-159A BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1132-789-A	s	MOUNTED CIRCUIT BOARD, EN-159A
4pcs	7-682-947-01	s	SCREW +PSW 3X6
C101	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3216
C102	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3216
C103	1-165-176-11	s	CAPACITOR,CERAMIC 47000PF/16V
C104	1-165-176-11	s	CAPACITOR,CERAMIC 47000PF/16V
C105	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C106	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C107	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C108	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C109	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C110	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C111	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C112	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C113	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C114	1-128-589-11	s	CAPACITOR ELECT 47MF/6.3V(105C
C115	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C116	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C117	1-165-176-11	s	CAPACITOR,CERAMIC 47000PF/16V
C118	1-165-176-11	s	CAPACITOR,CERAMIC 47000PF/16V
C120	1-100-620-91	s	CAPACITOR, CHIP 47MF(3225)
C121	1-100-620-91	s	CAPACITOR, CHIP 47MF(3225)
C122	1-100-620-91	s	CAPACITOR, CHIP 47MF(3225)
C123	1-100-620-91	s	CAPACITOR, CHIP 47MF(3225)
C124	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C125	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C126	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C127	1-115-412-11	s	CAPACITOR,CERAMIC 680PF/25V CH
C128	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C129	1-115-412-11	s	CAPACITOR,CERAMIC 680PF/25V CH
C130	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3216
C131	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C132	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3216
C133	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3216
C134	1-115-416-11	s	CAPACITOR,CERAMIC 1000PF/25V
C135	1-165-908-11	s	CAP, CERAMIC 1MF B 1608
C136	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C137	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C138	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C139	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C140	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C141	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C142	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C143	1-128-589-11	s	CAPACITOR ELECT 47MF/6.3V(105C
C144	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C145	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C146	1-128-589-11	s	CAPACITOR ELECT 47MF/6.3V(105C
C147	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C148	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C149	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C150	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C151	1-128-589-11	s	CAPACITOR ELECT 47MF/6.3V(105C
C152	1-128-589-11	s	CAPACITOR ELECT 47MF/6.3V(105C
C153	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C155	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C156	1-115-340-11	s	CAPACITOR CERAMIC 0.22MF/25V B
C157	1-115-340-11	s	CAPACITOR CERAMIC 0.22MF/25V B
C158	1-126-399-11	s	CAPACITOR ELECT 10MF/35V(CHIP)

(EN-159A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C159	1-126-399-11	s	CAPACITOR ELECT 10MF/35V(CHIP)
C160	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C161	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C162	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C163	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C164	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C165	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C166	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C167	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C201	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C202	1-165-908-11	s	CAP, CERAMIC 1MF B 1608
C205	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C231	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C232	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C233	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C234	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C235	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C236	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C237	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C238	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C239	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C240	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C241	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C242	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C243	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C244	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C245	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C246	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C247	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C248	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C249	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C301	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C302	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C303	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C304	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C305	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C306	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C307	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C308	1-162-915-11	s	CAPACITOR,CERAMIC 10PF/50V CH
C309	1-162-919-11	s	CAPACITOR,CERAMIC 22PF/50V CH
C310	1-115-416-11	s	CAPACITOR,CERAMIC 1000PF/25V
C311	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C312	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C313	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C314	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C315	1-127-954-11	s	CAPACITOR,CHIP FILM 0.047MF
C316	1-115-416-11	s	CAPACITOR,CERAMIC 1000PF/25V
C317	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C318	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C319	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C320	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C321	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C322	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C323	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C324	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C325	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C326	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C328	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C329	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)

(EN-159A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C330	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C331	1-165-872-21	s	CAPACITOR,SOLID ELECT 47MF
C332	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C333	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C334	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C335	1-127-573-11	s	CAPACITOR,CERAMIC 1MFB(2012)
C336	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C337	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C338	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C339	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C340	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C341	1-127-573-11	s	CAPACITOR,CERAMIC 1MFB(2012)
C342	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C343	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C344	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C345	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C346	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C347	1-162-915-11	s	CAPACITOR,CERAMIC 10PF/50V CH
C348	1-162-919-11	s	CAPACITOR,CERAMIC 22PF/50V CH
C349	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C350	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C351	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C352	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C353	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C354	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C355	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C356	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C357	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C358	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C359	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C360	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C361	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C362	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C363	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C364	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C365	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C366	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C367	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C368	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C369	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C370	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C371	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C372	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C373	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C374	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C375	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C376	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C377	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C378	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C379	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C380	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C381	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C382	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C383	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C384	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C385	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C386	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C387	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C388	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF

(EN-159A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C389	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C390	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C391	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C392	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C393	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C394	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C395	1-162-910-11	s	CAPACITOR,CERAMIC 5PF/50V 1608
C396	1-162-915-11	s	CAPACITOR,CERAMIC 10PF/50V CH
C397	1-162-910-11	s	CAPACITOR,CERAMIC 5PF/50V 1608
C398	1-162-915-11	s	CAPACITOR,CERAMIC 10PF/50V CH
C399	1-162-910-11	s	CAPACITOR,CERAMIC 5PF/50V 1608
C400	1-162-915-11	s	CAPACITOR,CERAMIC 10PF/50V CH
C401	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C402	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C403	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C404	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C405	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C406	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C407	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C408	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C409	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C410	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C411	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C412	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C413	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C414	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C415	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C416	1-162-915-11	s	CAPACITOR,CERAMIC 10PF/50V CH
C417	1-162-913-11	s	CAPACITOR,CHIP CERAMIC 8PF/50V
C418	1-162-915-11	s	CAPACITOR,CERAMIC 10PF/50V CH
C419	1-162-913-11	s	CAPACITOR,CHIP CERAMIC 8PF/50V
C420	1-162-915-11	s	CAPACITOR,CERAMIC 10PF/50V CH
C421	1-162-913-11	s	CAPACITOR,CHIP CERAMIC 8PF/50V
C501	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C502	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C503	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C504	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C505	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C506	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C507	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C508	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C509	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C510	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C511	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C512	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C513	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C514	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C515	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C516	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C517	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C518	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C524	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C618	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C619	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C620	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C621	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
CN501	1-764-093-21	o	PIN, CONNECTOR (PC BOARD) 8P

(EN-159A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
D101	8-719-017-03	s	DIODE 02DZ4.7-TPH3
D102	8-719-017-03	s	DIODE 02DZ4.7-TPH3
D202	8-719-064-52	s	DIODE CL-191YG-CD-T
D203	8-719-064-52	s	DIODE CL-191YG-CD-T
D301	8-719-801-78	s	DIODE 1SS184
D302	8-719-820-41	s	DIODE 1SS302
E101	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
E102	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
E103	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
E104	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
FB101	1-469-094-21	s	FERRITE, EMI (SMD)
FB102	1-469-094-21	s	FERRITE, EMI (SMD)
FB103	1-469-094-21	s	FERRITE, EMI (SMD)
FB104	1-469-094-21	s	FERRITE, EMI (SMD)
FB301	1-469-094-21	s	FERRITE, EMI (SMD)
FB302	1-469-094-21	s	FERRITE, EMI (SMD)
IC101	8-759-327-01	s	IC NJM062V-TE2
IC102	8-759-327-01	s	IC NJM062V-TE2
IC104	6-701-572-01	s	IC TPS54610PWPR
IC105	6-701-572-01	s	IC TPS54610PWPR
IC106	6-704-976-01	s	IC ADR381ART-REEL7
IC107	8-759-472-43	s	IC 74VHC245MTCX
IC108	8-759-472-43	s	IC 74VHC245MTCX
IC109	8-759-472-43	s	IC 74VHC245MTCX
IC110	8-752-392-03	s	IC CXD1095BR
IC111	8-759-662-38	s	IC 74VHCT08AMTCX
IC112	8-759-472-18	s	IC 74VHC138MTCX
IC113	6-706-478-01	s	IC TC7SET08FU(T5RSOJF)
IC114	8-759-685-33	s	IC BU2500FV-E2
IC116	6-706-491-01	s	IC TC7SH86FU(T5RSOYJF)
IC117	6-706-482-01	s	IC TC7SH00FU(T5RSOYJF)
IC118	8-759-338-95	s	IC NJM2903V (TE2)
IC201	8-759-675-47	s	IC SN74LVC04APWR
IC202	8-759-675-47	s	IC SN74LVC04APWR
IC207	8-759-472-65	s	IC 74VHC574MTCX
IC208	8-759-472-65	s	IC 74VHC574MTCX
IC209	8-759-472-65	s	IC 74VHC574MTCX
IC301	8-752-334-64	s	IC CXD1171M
IC302	8-759-533-95	s	IC UPD6466GS-515
IC303	8-759-533-95	s	IC UPD6466GS-515
IC304	6-706-484-01	s	IC TC7SH04FU(T5RSOYJF)
IC305	8-752-335-47	s	IC CXD1216M
IC306	8-759-970-59	s	IC TLC272CPS
IC307	8-752-337-04	s	IC CXD1176Q
IC308	6-706-484-01	s	IC TC7SH04FU(T5RSOYJF)
IC309	8-759-472-65	s	IC 74VHC574MTCX
IC310	8-759-662-38	s	IC 74VHCT08AMTCX
IC311	6-707-556-01	s	IC CXD9184R
IC312	8-759-745-64	s	IC NJM4560M
IC313	8-759-561-46	s	IC AD8014ART-REEL7
IC314	8-752-391-99	s	IC CXD2315Q-T4
IC315	6-706-478-01	s	IC TC7SET08FU(T5RSOJF)
IC316	8-752-391-99	s	IC CXD2315Q-T4
IC317	6-706-478-01	s	IC TC7SET08FU(T5RSOJF)
IC318	8-752-391-99	s	IC CXD2315Q-T4
IC319	8-759-561-46	s	IC AD8014ART-REEL7
IC320	8-759-561-46	s	IC AD8014ART-REEL7

(EN-159A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC321	8-759-561-46	s	IC AD8014ART-REEL7
IC502	6-700-387-01	s	IC EPC2LC20-TP
IC513	8-759-472-65	s	IC 74VHC574MTCX
IC514	8-759-472-65	s	IC 74VHC574MTCX
IC515	8-759-472-65	s	IC 74VHC574MTCX
L101	1-416-344-11	s	COIL, CHOKE 10UH
L102	1-416-344-11	s	COIL, CHOKE 10UH
L103	1-416-344-11	s	COIL, CHOKE 10UH
L104	1-416-344-11	s	COIL, CHOKE 10UH
L105	1-414-398-11	s	INDUCTOR (SMD) 10UH
L106	1-414-398-11	s	INDUCTOR (SMD) 10UH
L206	1-414-398-11	s	INDUCTOR (SMD) 10UH
L207	1-414-398-11	s	INDUCTOR (SMD) 10UH
L301	1-414-398-11	s	INDUCTOR (SMD) 10UH
L302	1-414-398-11	s	INDUCTOR (SMD) 10UH
L303	1-412-947-11	s	INDUCTOR 4.7UH (2520)
L304	1-414-398-11	s	INDUCTOR (SMD) 10UH
L305	1-414-398-11	s	INDUCTOR (SMD) 10UH
L306	1-414-398-11	s	INDUCTOR (SMD) 10UH
L307	1-414-398-11	s	INDUCTOR (SMD) 10UH
L308	1-414-398-11	s	INDUCTOR (SMD) 10UH
L309	1-414-398-11	s	INDUCTOR (SMD) 10UH
L310	1-412-955-11	s	INDUCTOR 22UH (2520)
L311	1-414-398-11	s	INDUCTOR (SMD) 10UH
L312	1-414-398-11	s	INDUCTOR (SMD) 10UH
L313	1-414-398-11	s	INDUCTOR (SMD) 10UH
L314	1-414-398-11	s	INDUCTOR (SMD) 10UH
L315	1-414-398-11	s	INDUCTOR (SMD) 10UH
L316	1-414-398-11	s	INDUCTOR (SMD) 10UH
L317	1-414-398-11	s	INDUCTOR (SMD) 10UH
L318	1-414-398-11	s	INDUCTOR (SMD) 10UH
L319	1-412-947-11	s	INDUCTOR 4.7UH (2520)
L320	1-412-947-11	s	INDUCTOR 4.7UH (2520)
L321	1-412-947-11	s	INDUCTOR 4.7UH (2520)
L322	1-414-398-11	s	INDUCTOR (SMD) 10UH
L323	1-414-398-11	s	INDUCTOR (SMD) 10UH
L324	1-414-398-11	s	INDUCTOR (SMD) 10UH
L325	1-414-398-11	s	INDUCTOR (SMD) 10UH
L326	1-414-398-11	s	INDUCTOR (SMD) 10UH
L327	1-414-398-11	s	INDUCTOR (SMD) 10UH
L501	1-414-398-11	s	INDUCTOR (SMD) 10UH
L502	1-414-398-11	s	INDUCTOR (SMD) 10UH
Q101	8-729-230-27	s	TRANSISTOR 2SA1213Y-TE12L
Q102	8-729-927-99	s	TRANSISTOR 2SC4617R
Q103	8-729-230-27	s	TRANSISTOR 2SA1213Y-TE12L
Q104	8-729-927-99	s	TRANSISTOR 2SC4617R
Q105	8-729-927-99	s	TRANSISTOR 2SC4617R
Q206	8-729-927-99	s	TRANSISTOR 2SC4617R
Q207	8-729-927-99	s	TRANSISTOR 2SC4617R
R101	1-218-883-11	s	RESISTOR,CHIP 33K 1/10W (1608)
R102	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/10W(1608)
R103	1-218-875-11	s	RESISTOR,CHIP 15K 1/10W (1608)
R104	1-218-875-11	s	RESISTOR,CHIP 15K 1/10W (1608)
R105	1-218-879-11	s	RESISTOR,CHIP 22K 1/10W (1608)
R106	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/10W(1608)
R107	1-218-891-11	s	RESISTOR,CHIP 68K 1/10W (1608)
R108	1-218-891-11	s	RESISTOR,CHIP 68K 1/10W (1608)
R109	1-218-875-11	s	RESISTOR,CHIP 15K 1/10W (1608)

(EN-159A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R110	1-218-875-11	s	RESISTOR,CHIP 15K 1/10W (1608)
R111	1-218-831-11	s	RESISTOR, CHIP 220 1/10W(1608)
R112	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R113	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/10W(1608)
R114	1-218-875-11	s	RESISTOR,CHIP 15K 1/10W (1608)
R115	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R116	1-218-831-11	s	RESISTOR, CHIP 220 1/10W(1608)
R117	1-218-831-11	s	RESISTOR, CHIP 220 1/10W(1608)
R118	1-218-831-11	s	RESISTOR, CHIP 220 1/10W(1608)
R119	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)
R120	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)
R121	1-218-831-11	s	RESISTOR, CHIP 220 1/10W(1608)
R122	1-218-851-11	s	RESISTOR,CHIP 1.5K 1/10W(1608)
R123	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R124	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R125	1-218-851-11	s	RESISTOR,CHIP 1.5K 1/10W(1608)
R126	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R127	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R128	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R129	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R130	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/10W(1608)
R131	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R132	1-218-879-11	s	RESISTOR,CHIP 22K 1/10W (1608)
R133	1-218-879-11	s	RESISTOR,CHIP 22K 1/10W (1608)
R134	1-218-859-11	s	RESISTOR,CHIP 3.3K 1/10W(1608)
R135	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R136	1-218-879-11	s	RESISTOR,CHIP 22K 1/10W (1608)
R137	1-218-887-11	s	RESISTOR,CHIP 47K 1/10W (1608)
R138	1-218-879-11	s	RESISTOR,CHIP 22K 1/10W (1608)
R139	1-218-879-11	s	RESISTOR,CHIP 22K 1/10W (1608)
R140	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R141	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/10W(1608)
R142	1-218-863-11	s	RESISTOR,CHIP 4.7K 1/10W(1608)
R143	1-218-887-11	s	RESISTOR,CHIP 47K 1/10W (1608)
R144	1-218-887-11	s	RESISTOR,CHIP 47K 1/10W (1608)
R145	1-218-879-11	s	RESISTOR,CHIP 22K 1/10W (1608)
R146	1-218-867-11	s	RESISTOR,CHIP 6.8K 1/10W(1608)
R147	1-218-883-11	s	RESISTOR,CHIP 33K 1/10W (1608)
R148	1-218-831-11	s	RESISTOR, CHIP 220 1/10W(1608)
R149	1-218-831-11	s	RESISTOR, CHIP 220 1/10W(1608)
R150	1-218-831-11	s	RESISTOR, CHIP 220 1/10W(1608)
R151	1-218-831-11	s	RESISTOR, CHIP 220 1/10W(1608)
R152	1-218-831-11	s	RESISTOR, CHIP 220 1/10W(1608)
R153	1-211-969-11	s	RESISTOR,CHIP 10 1/10W (1608)
R154	1-211-969-11	s	RESISTOR,CHIP 10 1/10W (1608)
R155	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R156	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R157	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R158	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R159	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R160	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R161	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R165	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R166	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R168	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R171	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R174	1-218-895-11	s	RESISTOR,CHIP 100K 1/10W(1608)
R175	1-218-895-11	s	RESISTOR,CHIP 100K 1/10W(1608)
R176	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)

(EN-159A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R177	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)
R204	1-211-985-11	s	RESISTOR,CHIP 47 1/10W (1608)
R206	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/10W(1608)
R210	1-211-985-11	s	RESISTOR,CHIP 47 1/10W (1608)
R211	1-211-985-11	s	RESISTOR,CHIP 47 1/10W (1608)
R213	1-218-863-11	s	RESISTOR,CHIP 4.7K 1/10W(1608)
R214	1-218-863-11	s	RESISTOR,CHIP 4.7K 1/10W(1608)
R221	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R223	1-211-985-11	s	RESISTOR,CHIP 47 1/10W (1608)
R224	1-211-985-11	s	RESISTOR,CHIP 47 1/10W (1608)
R225	1-211-985-11	s	RESISTOR,CHIP 47 1/10W (1608)
R226	1-211-985-11	s	RESISTOR,CHIP 47 1/10W (1608)
R227	1-211-985-11	s	RESISTOR,CHIP 47 1/10W (1608)
R228	1-211-985-11	s	RESISTOR,CHIP 47 1/10W (1608)
R229	1-211-985-11	s	RESISTOR,CHIP 47 1/10W (1608)
R230	1-211-985-11	s	RESISTOR,CHIP 47 1/10W (1608)
R231	1-211-985-11	s	RESISTOR,CHIP 47 1/10W (1608)
R232	1-211-985-11	s	RESISTOR,CHIP 47 1/10W (1608)
R259	1-218-863-11	s	RESISTOR,CHIP 4.7K 1/10W(1608)
R260	1-211-985-11	s	RESISTOR,CHIP 47 1/10W (1608)
R261	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R262	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R263	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R264	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R265	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R266	1-218-887-11	s	RESISTOR,CHIP 47K 1/10W (1608)
R267	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R268	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R269	1-218-887-11	s	RESISTOR,CHIP 47K 1/10W (1608)
R270	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R271	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R272	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R273	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R274	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R275	1-218-887-11	s	RESISTOR,CHIP 47K 1/10W (1608)
R276	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)
R277	1-218-887-11	s	RESISTOR,CHIP 47K 1/10W (1608)
R278	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)
R279	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R298	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R301	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R302	1-218-839-11	s	RESISTOR,CHIP 470 1/10W (1608)
R303	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/10W(1608)
R305	1-218-883-11	s	RESISTOR,CHIP 33K 1/10W (1608)
R306	1-218-879-11	s	RESISTOR,CHIP 22K 1/10W (1608)
R307	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)
R308	1-218-839-11	s	RESISTOR,CHIP 470 1/10W (1608)
R309	1-218-839-11	s	RESISTOR,CHIP 470 1/10W (1608)
R311	1-218-895-11	s	RESISTOR,CHIP 100K 1/10W(1608)
R312	1-218-831-11	s	RESISTOR, CHIP 220 1/10W(1608)
R313	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R314	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R315	1-211-985-11	s	RESISTOR,CHIP 47 1/10W (1608)
R316	1-211-985-11	s	RESISTOR,CHIP 47 1/10W (1608)
R317	1-211-985-11	s	RESISTOR,CHIP 47 1/10W (1608)
R318	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R319	1-211-985-11	s	RESISTOR,CHIP 47 1/10W (1608)
R320	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R321	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)

(EN-159A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R322	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)
R323	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/10W(1608)
R324	1-218-835-11	s	RESISTOR,CHIP 330 1/10W (1608)
R325	1-218-851-11	s	RESISTOR,CHIP 1.5K 1/10W(1608)
R326	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R327	1-211-969-11	s	RESISTOR,CHIP 10 1/10W (1608)
R329	1-218-879-11	s	RESISTOR,CHIP 22K 1/10W (1608)
R331	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R332	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R333	1-211-985-11	s	RESISTOR,CHIP 47 1/10W (1608)
R334	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R341	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R342	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R343	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R344	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R345	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R346	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R347	1-218-863-11	s	RESISTOR,CHIP 4.7K 1/10W(1608)
R348	1-218-863-11	s	RESISTOR,CHIP 4.7K 1/10W(1608)
R349	1-211-969-11	s	RESISTOR,CHIP 10 1/10W (1608)
R350	1-218-831-11	s	RESISTOR, CHIP 220 1/10W(1608)
R351	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R352	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R353	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R354	1-218-863-11	s	RESISTOR,CHIP 4.7K 1/10W(1608)
R355	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)
R356	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)
R357	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R358	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R360	1-218-831-11	s	RESISTOR, CHIP 220 1/10W(1608)
R361	1-218-831-11	s	RESISTOR, CHIP 220 1/10W(1608)
R362	1-218-831-11	s	RESISTOR, CHIP 220 1/10W(1608)
R363	1-218-831-11	s	RESISTOR, CHIP 220 1/10W(1608)
R364	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R365	1-211-985-11	s	RESISTOR,CHIP 47 1/10W (1608)
R366	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/10W(1608)
R367	1-218-831-11	s	RESISTOR, CHIP 220 1/10W(1608)
R368	1-218-831-11	s	RESISTOR, CHIP 220 1/10W(1608)
R369	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R370	1-218-831-11	s	RESISTOR, CHIP 220 1/10W(1608)
R371	1-218-831-11	s	RESISTOR, CHIP 220 1/10W(1608)
R372	1-218-831-11	s	RESISTOR, CHIP 220 1/10W(1608)
R373	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)
R375	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R376	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/10W(1608)
R377	1-218-851-11	s	RESISTOR,CHIP 1.5K 1/10W(1608)
R378	1-211-985-11	s	RESISTOR,CHIP 47 1/10W (1608)
R379	1-218-851-11	s	RESISTOR,CHIP 1.5K 1/10W(1608)
R380	1-218-843-11	s	RESISTOR,CHIP 680 1/10W (1608)
R381	1-218-851-11	s	RESISTOR,CHIP 1.5K 1/10W(1608)
R382	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R383	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R384	1-218-843-11	s	RESISTOR,CHIP 680 1/10W (1608)
R387	1-218-827-11	s	RESISTOR,CHIP 150 1/10W (1608)
R390	1-218-831-11	s	RESISTOR, CHIP 220 1/10W(1608)
R391	1-218-827-11	s	RESISTOR,CHIP 150 1/10W (1608)
R392	1-218-827-11	s	RESISTOR,CHIP 150 1/10W (1608)
R393	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R394	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)

(EN-159A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R396	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R398	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R400	1-218-859-11	s	RESISTOR,CHIP 3.3K 1/10W(1608)
R401	1-218-859-11	s	RESISTOR,CHIP 3.3K 1/10W(1608)
R402	1-218-859-11	s	RESISTOR,CHIP 3.3K 1/10W(1608)
R403	1-218-831-11	s	RESISTOR, CHIP 220 1/10W(1608)
R404	1-218-831-11	s	RESISTOR, CHIP 220 1/10W(1608)
R405	1-218-831-11	s	RESISTOR, CHIP 220 1/10W(1608)
R406	1-218-835-11	s	RESISTOR,CHIP 330 1/10W (1608)
R407	1-218-835-11	s	RESISTOR,CHIP 330 1/10W (1608)
R408	1-218-835-11	s	RESISTOR,CHIP 330 1/10W (1608)
R409	1-218-851-11	s	RESISTOR,CHIP 1.5K 1/10W(1608)
R410	1-218-851-11	s	RESISTOR,CHIP 1.5K 1/10W(1608)
R411	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/10W(1608)
R412	1-218-851-11	s	RESISTOR,CHIP 1.5K 1/10W(1608)
R413	1-218-851-11	s	RESISTOR,CHIP 1.5K 1/10W(1608)
R414	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/10W(1608)
R415	1-218-851-11	s	RESISTOR,CHIP 1.5K 1/10W(1608)
R416	1-218-851-11	s	RESISTOR,CHIP 1.5K 1/10W(1608)
R417	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/10W(1608)
R418	1-218-887-11	s	RESISTOR,CHIP 47K 1/10W (1608)
R419	1-218-903-11	s	RESISTOR,CHIP 220K 1/10W(1608)
R420	1-218-887-11	s	RESISTOR,CHIP 47K 1/10W (1608)
R421	1-218-903-11	s	RESISTOR,CHIP 220K 1/10W(1608)
R422	1-218-887-11	s	RESISTOR,CHIP 47K 1/10W (1608)
R423	1-218-903-11	s	RESISTOR,CHIP 220K 1/10W(1608)
R424	1-218-875-11	s	RESISTOR,CHIP 15K 1/10W (1608)
R425	1-218-875-11	s	RESISTOR,CHIP 15K 1/10W (1608)
R426	1-218-875-11	s	RESISTOR,CHIP 15K 1/10W (1608)
R427	1-218-835-11	s	RESISTOR,CHIP 330 1/10W (1608)
R428	1-218-835-11	s	RESISTOR,CHIP 330 1/10W (1608)
R429	1-218-835-11	s	RESISTOR,CHIP 330 1/10W (1608)
R430	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R431	1-218-851-11	s	RESISTOR,CHIP 1.5K 1/10W(1608)
R432	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R433	1-218-851-11	s	RESISTOR,CHIP 1.5K 1/10W(1608)
R434	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R435	1-218-851-11	s	RESISTOR,CHIP 1.5K 1/10W(1608)
R436	1-218-851-11	s	RESISTOR,CHIP 1.5K 1/10W(1608)
R437	1-218-867-11	s	RESISTOR,CHIP 6.8K 1/10W(1608)
R438	1-218-843-11	s	RESISTOR,CHIP 680 1/10W (1608)
R439	1-218-851-11	s	RESISTOR,CHIP 1.5K 1/10W(1608)
R440	1-218-867-11	s	RESISTOR,CHIP 6.8K 1/10W(1608)
R441	1-218-843-11	s	RESISTOR,CHIP 680 1/10W (1608)
R442	1-218-851-11	s	RESISTOR,CHIP 1.5K 1/10W(1608)
R443	1-218-867-11	s	RESISTOR,CHIP 6.8K 1/10W(1608)
R444	1-218-843-11	s	RESISTOR,CHIP 680 1/10W (1608)
R445	1-211-989-11	s	RESISTOR,CHIP 68 1/10W (1608)
R446	1-211-989-11	s	RESISTOR,CHIP 68 1/10W (1608)
R447	1-211-989-11	s	RESISTOR,CHIP 68 1/10W (1608)
R448	1-218-843-11	s	RESISTOR,CHIP 680 1/10W (1608)
R449	1-218-843-11	s	RESISTOR,CHIP 680 1/10W (1608)
R450	1-218-843-11	s	RESISTOR,CHIP 680 1/10W (1608)
R451	1-218-831-11	s	RESISTOR, CHIP 220 1/10W(1608)
R452	1-218-831-11	s	RESISTOR, CHIP 220 1/10W(1608)
R453	1-218-831-11	s	RESISTOR, CHIP 220 1/10W(1608)
R454	1-218-831-11	s	RESISTOR, CHIP 220 1/10W(1608)
R455	1-218-831-11	s	RESISTOR, CHIP 220 1/10W(1608)
R456	1-218-831-11	s	RESISTOR, CHIP 220 1/10W(1608)

(EN-159A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R457	1-218-831-11	s	RESISTOR, CHIP 220 1/10W(1608)
R458	1-211-969-11	s	RESISTOR,CHIP 10 1/10W (1608)
R459	1-211-969-11	s	RESISTOR,CHIP 10 1/10W (1608)
R501	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R502	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R503	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)
R504	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R505	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R506	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R507	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R508	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R509	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R510	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R511	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R512	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R513	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R514	1-211-985-11	s	RESISTOR,CHIP 47 1/10W (1608)
R515	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R516	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)
R517	1-211-985-11	s	RESISTOR,CHIP 47 1/10W (1608)
R525	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)
R526	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)
R527	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)
R528	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)
R547	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R663	1-218-879-11	s	RESISTOR,CHIP 22K 1/10W (1608)
R667	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R668	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R669	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R670	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R671	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R672	1-218-887-11	s	RESISTOR,CHIP 47K 1/10W (1608)
R901	1-218-895-11	s	RESISTOR,CHIP 100K 1/10W(1608)
R902	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R911	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)
R912	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)
R913	1-218-831-11	s	RESISTOR, CHIP 220 1/10W(1608)
RB101	1-234-381-21	s	RES, NETWORK 100KX4 (1005)
RB102	1-234-381-21	s	RES, NETWORK 100KX4 (1005)
RB103	1-234-381-21	s	RES, NETWORK 100KX4 (1005)
RB104	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB105	1-234-381-21	s	RES, NETWORK 100KX4 (1005)
RB106	1-234-381-21	s	RES, NETWORK 100KX4 (1005)
RB107	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB108	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB109	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB110	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB111	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB112	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB113	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB114	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB115	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB116	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB117	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB118	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB119	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB120	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB121	1-234-372-11	s	RES, NETWORK 100X4 (1005)

(EN-159A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description	
RB122	1-234-372-11	s	RES, NETWORK 100X4	(1005)
RB123	1-234-372-11	s	RES, NETWORK 100X4	(1005)
RB124	1-234-372-11	s	RES, NETWORK 100X4	(1005)
RB125	1-234-372-11	s	RES, NETWORK 100X4	(1005)
RB127	1-234-381-21	s	RES, NETWORK 100KX4	(1005)
RB128	1-234-381-21	s	RES, NETWORK 100KX4	(1005)
RB202	1-234-373-21	s	RES, NETWORK 220X4	(1005)
RB203	1-234-373-21	s	RES, NETWORK 220X4	(1005)
RB204	1-234-373-21	s	RES, NETWORK 220X4	(1005)
RB205	1-234-373-21	s	RES, NETWORK 220X4	(1005)
RB206	1-234-373-21	s	RES, NETWORK 220X4	(1005)
RB207	1-234-373-21	s	RES, NETWORK 220X4	(1005)
RB210	1-234-372-11	s	RES, NETWORK 100X4	(1005)
RB211	1-234-372-11	s	RES, NETWORK 100X4	(1005)
RB212	1-234-372-11	s	RES, NETWORK 100X4	(1005)
RB213	1-234-372-11	s	RES, NETWORK 100X4	(1005)
RB214	1-234-372-11	s	RES, NETWORK 100X4	(1005)
RB215	1-234-373-21	s	RES, NETWORK 220X4	(1005)
RB216	1-234-373-21	s	RES, NETWORK 220X4	(1005)
RB217	1-234-373-21	s	RES, NETWORK 220X4	(1005)
RB218	1-234-373-21	s	RES, NETWORK 220X4	(1005)
RB219	1-234-373-21	s	RES, NETWORK 220X4	(1005)
RB220	1-234-373-21	s	RES, NETWORK 220X4	(1005)
RB221	1-234-373-21	s	RES, NETWORK 220X4	(1005)
RB222	1-234-381-21	s	RES, NETWORK 100KX4	(1005)
RB223	1-234-372-11	s	RES, NETWORK 100X4	(1005)
RB224	1-234-372-11	s	RES, NETWORK 100X4	(1005)
RB225	1-234-372-11	s	RES, NETWORK 100X4	(1005)
RB226	1-234-372-11	s	RES, NETWORK 100X4	(1005)
RB227	1-234-372-11	s	RES, NETWORK 100X4	(1005)
RB228	1-234-372-11	s	RES, NETWORK 100X4	(1005)
RB229	1-234-372-11	s	RES, NETWORK 100X4	(1005)
RB230	1-234-372-11	s	RES, NETWORK 100X4	(1005)
RB231	1-234-372-11	s	RES, NETWORK 100X4	(1005)
RB232	1-234-372-11	s	RES, NETWORK 100X4	(1005)
RB233	1-234-372-11	s	RES, NETWORK 100X4	(1005)
RB234	1-234-373-21	s	RES, NETWORK 220X4	(1005)
RB235	1-234-372-11	s	RES, NETWORK 100X4	(1005)
RB236	1-234-373-21	s	RES, NETWORK 220X4	(1005)
RB237	1-234-381-21	s	RES, NETWORK 100KX4	(1005)
RB238	1-234-372-11	s	RES, NETWORK 100X4	(1005)
RB239	1-234-372-11	s	RES, NETWORK 100X4	(1005)
RB240	1-234-372-11	s	RES, NETWORK 100X4	(1005)
RB241	1-234-372-11	s	RES, NETWORK 100X4	(1005)
RB242	1-234-372-11	s	RES, NETWORK 100X4	(1005)
RB243	1-234-372-11	s	RES, NETWORK 100X4	(1005)
RB254	1-234-372-11	s	RES, NETWORK 100X4	(1005)
RB255	1-234-372-11	s	RES, NETWORK 100X4	(1005)
RB301	1-234-373-21	s	RES, NETWORK 220X4	(1005)
RB302	1-234-373-21	s	RES, NETWORK 220X4	(1005)
RB303	1-234-372-11	s	RES, NETWORK 100X4	(1005)
RB304	1-234-372-11	s	RES, NETWORK 100X4	(1005)
RB305	1-234-379-11	s	RESISTOR,NETWORK 22KX4	(1005)
RB306	1-234-372-11	s	RES, NETWORK 100X4	(1005)
RB307	1-234-372-11	s	RES, NETWORK 100X4	(1005)
RB308	1-234-381-21	s	RES, NETWORK 100KX4	(1005)
RB309	1-234-381-21	s	RES, NETWORK 100KX4	(1005)
RB311	1-234-372-11	s	RES, NETWORK 100X4	(1005)
RB312	1-234-372-11	s	RES, NETWORK 100X4	(1005)

(EN-159A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description	
RB313	1-234-373-21	s	RES, NETWORK 220X4	(1005)
RB314	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB315	1-234-373-21	s	RES, NETWORK 220X4	(1005)
RB316	1-234-373-21	s	RES, NETWORK 220X4	(1005)
RB317	1-234-373-21	s	RES, NETWORK 220X4	(1005)
RB318	1-234-373-21	s	RES, NETWORK 220X4	(1005)
RB319	1-234-373-21	s	RES, NETWORK 220X4	(1005)
RB320	1-234-373-21	s	RES, NETWORK 220X4	(1005)
RB321	1-234-373-21	s	RES, NETWORK 220X4	(1005)
RB322	1-234-373-21	s	RES, NETWORK 220X4	(1005)
RB323	1-234-373-21	s	RES, NETWORK 220X4	(1005)
RB324	1-234-373-21	s	RES, NETWORK 220X4	(1005)
RB325	1-234-373-21	s	RES, NETWORK 220X4	(1005)
RB326	1-234-373-21	s	RES, NETWORK 220X4	(1005)
RB327	1-234-373-21	s	RES, NETWORK 220X4	(1005)
RB328	1-234-373-21	s	RES, NETWORK 220X4	(1005)
RB329	1-234-373-21	s	RES, NETWORK 220X4	(1005)
RB330	1-234-373-21	s	RES, NETWORK 220X4	(1005)
RB331	1-234-373-21	s	RES, NETWORK 220X4	(1005)
RB501	1-234-372-11	s	RES, NETWORK 100X4	(1005)
RB502	1-234-372-11	s	RES, NETWORK 100X4	(1005)
RB503	1-234-372-11	s	RES, NETWORK 100X4	(1005)
RB504	1-234-372-11	s	RES, NETWORK 100X4	(1005)
RB505	1-234-372-11	s	RES, NETWORK 100X4	(1005)
RB506	1-234-372-11	s	RES, NETWORK 100X4	(1005)
RB507	1-234-372-11	s	RES, NETWORK 100X4	(1005)
RB508	1-234-372-11	s	RES, NETWORK 100X4	(1005)
RB529	1-234-373-21	s	RES, NETWORK 220X4	(1005)
RB530	1-234-373-21	s	RES, NETWORK 220X4	(1005)
RB531	1-234-373-21	s	RES, NETWORK 220X4	(1005)
RB532	1-234-373-21	s	RES, NETWORK 220X4	(1005)
RB533	1-234-373-21	s	RES, NETWORK 220X4	(1005)
RB534	1-234-373-21	s	RES, NETWORK 220X4	(1005)
RB539	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB540	1-234-372-11	s	RES, NETWORK 100X4	(1005)
RB541	1-234-372-11	s	RES, NETWORK 100X4	(1005)
RB542	1-234-372-11	s	RES, NETWORK 100X4	(1005)
RB543	1-234-372-11	s	RES, NETWORK 100X4	(1005)
RB544	1-234-372-11	s	RES, NETWORK 100X4	(1005)
RV301	1-225-793-11	s	RES, ADJ, CERMET 20K	
RV302	1-225-792-21	s	RES, ADJ, CERMET 10K	
RV303	1-225-787-21	s	RES, ADJ, CERMET 500	
RV304	1-225-787-21	s	RES, ADJ, CERMET 500	
RV305	1-225-787-21	s	RES, ADJ, CERMET 500	
S201	1-762-120-11	s	SWITCH, TOGGLE	
S301	1-570-711-11	s	SWITCH,SLIDE	
THP101 ⚠	1-533-817-21	s	THERMISTOR	
THP102 ⚠	1-533-817-21	s	THERMISTOR	
THP103 ⚠	1-533-817-21	s	THERMISTOR	
THP104 ⚠	1-533-817-21	s	THERMISTOR	
THP105 ⚠	1-533-817-21	s	THERMISTOR	
THP106 ⚠	1-803-615-11	s	THERMISTOR, POSITIVE	
THP107 ⚠	1-803-615-11	s	THERMISTOR, POSITIVE	
TP202	1-535-877-22	s	CHIP,CHECKER (TEST POINT)	
TP207	1-535-877-22	s	CHIP,CHECKER (TEST POINT)	
TP301	1-535-877-22	s	CHIP,CHECKER (TEST POINT)	
TP302	1-535-877-22	s	CHIP,CHECKER (TEST POINT)	
TP303	1-535-877-22	s	CHIP,CHECKER (TEST POINT)	

(EN-159A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
TP304	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
TP305	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
TP306	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
TP307	1-535-877-22	s	CHIP,CHECKER (TEST POINT)

EN-159B BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1132-790-A	s	MOUNTED CIRCUIT BOARD, EN-159B
4pcs	7-682-947-01	s	SCREW +PSW 3X6
C101	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3216
C102	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3216
C103	1-165-176-11	s	CAPACITOR,CERAMIC 47000PF/16V
C104	1-165-176-11	s	CAPACITOR,CERAMIC 47000PF/16V
C105	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C106	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C107	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C108	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C109	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C110	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C111	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C112	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C113	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C114	1-128-589-11	s	CAPACITOR ELECT 47MF/6.3V(105C
C115	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C116	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C117	1-165-176-11	s	CAPACITOR,CERAMIC 47000PF/16V
C118	1-165-176-11	s	CAPACITOR,CERAMIC 47000PF/16V
C120	1-100-620-91	s	CAPACITOR, CHIP 47MF(3225)
C121	1-100-620-91	s	CAPACITOR, CHIP 47MF(3225)
C122	1-100-620-91	s	CAPACITOR, CHIP 47MF(3225)
C123	1-100-620-91	s	CAPACITOR, CHIP 47MF(3225)
C124	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C125	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C126	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C127	1-115-412-11	s	CAPACITOR,CERAMIC 680PF/25V CH
C128	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C129	1-115-412-11	s	CAPACITOR,CERAMIC 680PF/25V CH
C130	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3216
C131	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C132	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3216
C133	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3216
C134	1-115-416-11	s	CAPACITOR,CERAMIC 1000PF/25V
C135	1-165-908-11	s	CAP, CERAMIC 1MF B 1608
C136	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C137	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C138	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C139	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C140	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C141	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C142	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C143	1-128-589-11	s	CAPACITOR ELECT 47MF/6.3V(105C
C144	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C145	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C146	1-128-589-11	s	CAPACITOR ELECT 47MF/6.3V(105C
C147	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C148	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C149	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C150	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C151	1-128-589-11	s	CAPACITOR ELECT 47MF/6.3V(105C
C152	1-128-589-11	s	CAPACITOR ELECT 47MF/6.3V(105C
C153	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C155	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C156	1-115-340-11	s	CAPACITOR CERAMIC 0.22MF/25V B
C157	1-115-340-11	s	CAPACITOR CERAMIC 0.22MF/25V B
C158	1-126-399-11	s	CAPACITOR ELECT 10MF/35V(CHIP)

(EN-159B BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C159	1-126-399-11	s	CAPACITOR ELECT 10MF/35V(CHIP)
C160	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C161	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C162	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C163	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C164	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C165	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C166	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C167	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C201	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C202	1-165-908-11	s	CAP, CERAMIC 1MF B 1608
C203	1-126-391-11	s	CAPACITOR ELECT 47MF/6.3V(105)
C204	1-126-391-11	s	CAPACITOR ELECT 47MF/6.3V(105)
C205	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C206	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C207	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C208	1-162-915-11	s	CAPACITOR,CERAMIC 10PF/50V CH
C209	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C210	1-162-919-11	s	CAPACITOR,CERAMIC 22PF/50V CH
C211	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C212	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C213	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C214	1-162-910-11	s	CAPACITOR,CERAMIC 5PF/50V 1608
C215	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C216	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C217	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C218	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C219	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C220	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C221	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C222	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C223	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C224	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C225	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C226	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C227	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C228	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C229	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C230	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C231	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C232	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C233	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C234	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C235	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C236	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C237	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C238	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C239	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C240	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C241	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C242	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C243	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C244	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C245	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C246	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C247	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C248	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C249	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C250	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF

(EN-159B BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C251	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C252	1-165-872-21	s	CAPACITOR,SOLID ELECT 47MF
C253	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C254	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C255	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C256	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C257	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C258	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C259	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C260	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C261	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C262	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C263	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C264	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C265	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C266	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C267	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C268	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C301	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C302	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C303	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C304	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C305	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C306	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C307	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C308	1-162-915-11	s	CAPACITOR,CERAMIC 10PF/50V CH
C309	1-162-919-11	s	CAPACITOR,CERAMIC 22PF/50V CH
C310	1-115-416-11	s	CAPACITOR,CERAMIC 1000PF/25V
C311	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C312	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C313	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C314	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C315	1-127-954-11	s	CAPACITOR,CHIP FILM 0.047MF
C316	1-115-416-11	s	CAPACITOR,CERAMIC 1000PF/25V
C317	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C318	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C319	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C320	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C321	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C322	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C323	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C324	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C325	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C326	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C328	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C329	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C330	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C331	1-165-872-21	s	CAPACITOR,SOLID ELECT 47MF
C332	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C333	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C334	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C335	1-127-573-11	s	CAPACITOR,CERAMIC 1MFB(2012)
C336	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C337	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C338	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C339	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C340	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C341	1-127-573-11	s	CAPACITOR,CERAMIC 1MFB(2012)
C342	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF

(EN-159B BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C343	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C344	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C345	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C346	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C347	1-162-915-11	s	CAPACITOR,CERAMIC 10PF/50V CH
C348	1-162-919-11	s	CAPACITOR,CERAMIC 22PF/50V CH
C349	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C350	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C351	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C352	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C353	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C354	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C355	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C356	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C357	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C358	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C359	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C360	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C361	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C362	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C363	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C364	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C365	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C366	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C367	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C368	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C369	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C370	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C371	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C372	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C373	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C374	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C375	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C376	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C377	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C378	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C379	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C380	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C381	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C382	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C383	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C384	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C385	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C386	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C387	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C388	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C389	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C390	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C391	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C392	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C393	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C394	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C395	1-162-910-11	s	CAPACITOR,CERAMIC 5PF/50V 1608
C396	1-162-915-11	s	CAPACITOR,CERAMIC 10PF/50V CH
C397	1-162-910-11	s	CAPACITOR,CERAMIC 5PF/50V 1608
C398	1-162-915-11	s	CAPACITOR,CERAMIC 10PF/50V CH
C399	1-162-910-11	s	CAPACITOR,CERAMIC 5PF/50V 1608
C400	1-162-915-11	s	CAPACITOR,CERAMIC 10PF/50V CH
C401	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH

(EN-159B BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C402	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C403	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C404	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C405	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C406	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C407	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C408	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C409	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C410	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C411	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C412	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C413	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C414	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C415	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C416	1-162-915-11	s	CAPACITOR,CERAMIC 10PF/50V CH
C417	1-162-913-11	s	CAPACITOR,CHIP CERAMIC 8PF/50V
C418	1-162-915-11	s	CAPACITOR,CERAMIC 10PF/50V CH
C419	1-162-913-11	s	CAPACITOR,CHIP CERAMIC 8PF/50V
C420	1-162-915-11	s	CAPACITOR,CERAMIC 10PF/50V CH
C421	1-162-913-11	s	CAPACITOR,CHIP CERAMIC 8PF/50V
C501	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C502	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C503	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C504	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C505	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C506	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C507	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C508	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C509	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C510	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C511	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C512	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C513	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C514	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C515	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C516	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C517	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C518	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C519	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C520	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C521	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C522	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C523	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C524	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C525	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C526	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C527	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C528	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C529	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C530	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C531	1-162-912-11	s	CAPACITOR,CERAMIC 7PF/50V 1608
C532	1-162-919-11	s	CAPACITOR,CERAMIC 22PF/50V CH
C533	1-162-912-11	s	CAPACITOR,CERAMIC 7PF/50V 1608
C534	1-162-919-11	s	CAPACITOR,CERAMIC 22PF/50V CH
C535	1-162-912-11	s	CAPACITOR,CERAMIC 7PF/50V 1608
C536	1-162-919-11	s	CAPACITOR,CERAMIC 22PF/50V CH
C537	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C538	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C539	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH

(EN-159B BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C540	1-162-919-11	s	CAPACITOR,CERAMIC 22PF/50V CH
C541	1-162-919-11	s	CAPACITOR,CERAMIC 22PF/50V CH
C542	1-162-919-11	s	CAPACITOR,CERAMIC 22PF/50V CH
C543	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C544	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C545	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C546	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C547	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C548	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C549	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C550	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C551	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C552	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C553	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C554	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C555	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C556	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C557	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C558	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C559	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C560	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C561	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C562	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C563	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C564	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C565	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C566	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C567	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C568	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C569	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C570	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C571	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C572	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C573	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C574	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C575	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C576	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C577	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C578	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C579	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C580	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C581	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C582	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C583	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C584	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C585	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C586	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C587	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C588	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C589	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C590	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C591	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C592	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C593	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C594	1-162-915-11	s	CAPACITOR,CERAMIC 10PF/50V CH
C595	1-162-919-11	s	CAPACITOR,CERAMIC 22PF/50V CH
C596	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C597	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C598	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF

(EN-159B BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C599	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C600	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C601	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C602	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C603	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C604	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C605	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C606	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C607	1-162-915-11	s	CAPACITOR,CERAMIC 10PF/50V CH
C608	1-162-915-11	s	CAPACITOR,CERAMIC 10PF/50V CH
C609	1-162-915-11	s	CAPACITOR,CERAMIC 10PF/50V CH
C610	1-162-915-11	s	CAPACITOR,CERAMIC 10PF/50V CH
C611	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C612	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C613	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C614	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C615	1-162-915-11	s	CAPACITOR,CERAMIC 10PF/50V CH
C616	1-162-910-11	s	CAPACITOR,CERAMIC 5PF/50V 1608
C617	1-162-915-11	s	CAPACITOR,CERAMIC 10PF/50V CH
C618	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C619	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C620	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
CN501	1-764-093-21	o	PIN, CONNECTOR (PC BOARD) 8P
D101	8-719-017-03	s	DIODE 02DZ4.7-TPH3
D102	8-719-017-03	s	DIODE 02DZ4.7-TPH3
D201	8-719-024-71	s	DIODE 1SS362-TE85L
D202	8-719-064-52	s	DIODE CL-191YG-CD-T
D203	8-719-064-52	s	DIODE CL-191YG-CD-T
D204	8-719-063-83	s	LED SML-510MWT86
D205	8-719-077-09	s	DIODE CL-196HR-CD-T
D301	8-719-801-78	s	DIODE 1SS184
D302	8-719-820-41	s	DIODE 1SS302
D501	8-719-801-78	s	DIODE 1SS184
D502	8-719-820-41	s	DIODE 1SS302
D503	8-719-820-41	s	DIODE 1SS302
D504	8-719-820-41	s	DIODE 1SS302
E101	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
E102	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
E103	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
E104	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
FB101	1-469-094-21	s	FERRITE, EMI (SMD)
FB102	1-469-094-21	s	FERRITE, EMI (SMD)
FB103	1-469-094-21	s	FERRITE, EMI (SMD)
FB104	1-469-094-21	s	FERRITE, EMI (SMD)
FB301	1-469-094-21	s	FERRITE, EMI (SMD)
FB302	1-469-094-21	s	FERRITE, EMI (SMD)
FL501	1-813-437-11	s	FILTER, LOW PASS (10MHZ)
FL502	1-813-437-11	s	FILTER, LOW PASS (10MHZ)
FL503	1-813-437-11	s	FILTER, LOW PASS (10MHZ)
IC101	8-759-327-01	s	IC NJM062V-TE2
IC102	8-759-327-01	s	IC NJM062V-TE2
IC104	6-701-572-01	s	IC TPS54610PWPR
IC105	6-701-572-01	s	IC TPS54610PWPR
IC106	6-704-976-01	s	IC ADR381ART-REEL7
IC107	8-759-472-43	s	IC 74VHC245MTCX
IC108	8-759-472-43	s	IC 74VHC245MTCX

(EN-159B BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC109	8-759-472-43	s	IC 74VHC245MTCX
IC110	8-752-392-03	s	IC CXD1095BR
IC111	8-759-662-38	s	IC 74VHCT08AMTCX
IC112	8-759-472-18	s	IC 74VHC138MTCX
IC113	6-706-478-01	s	IC TC7SET08FU(T5RSOJF)
IC114	8-759-685-33	s	IC BU2500FV-E2
IC116	6-706-491-01	s	IC TC7SH86FU(T5RSOYJF)
IC117	6-706-482-01	s	IC TC7SH00FU(T5RSOYJF)
IC118	8-759-338-95	s	IC NJM2903V (TE2)
IC201	8-759-675-47	s	IC SN74LVC04APWR
IC202	8-759-675-47	s	IC SN74LVC04APWR
IC203	8-759-561-46	s	IC AD8014ART-REEL7
IC204	8-759-184-64	s	IC TC4W66FU
IC205	8-759-344-12	s	IC GS4981CTAE3
IC206	8-759-472-43	s	IC 74VHC245MTCX
IC207	8-759-472-65	s	IC 74VHC574MTCX
IC208	8-759-472-65	s	IC 74VHC574MTCX
IC209	8-759-472-65	s	IC 74VHC574MTCX
IC211	6-707-557-01	s	IC CXD9186R
IC212	8-759-327-01	s	IC NJM062V-TE2
IC213	8-759-472-14	s	IC 74VHC125MTCX
IC301	8-752-334-64	s	IC CXD1171M
IC302	8-759-533-95	s	IC UPD6466GS-515
IC303	8-759-533-95	s	IC UPD6466GS-515
IC304	6-706-484-01	s	IC TC7SH04FU(T5RSOYJF)
IC305	8-752-335-47	s	IC CXD1216M
IC306	8-759-970-59	s	IC TLC272CPS
IC307	8-752-337-04	s	IC CXD1176Q
IC308	6-706-484-01	s	IC TC7SH04FU(T5RSOYJF)
IC309	8-759-472-65	s	IC 74VHC574MTCX
IC310	8-759-662-38	s	IC 74VHCT08AMTCX
IC311	6-707-556-01	s	IC CXD9184R
IC312	8-759-745-64	s	IC NJM4560M
IC313	8-759-561-46	s	IC AD8014ART-REEL7
IC314	8-752-391-99	s	IC CXD2315Q-T4
IC315	6-706-478-01	s	IC TC7SET08FU(T5RSOJF)
IC316	8-752-391-99	s	IC CXD2315Q-T4
IC317	6-706-478-01	s	IC TC7SET08FU(T5RSOJF)
IC318	8-752-391-99	s	IC CXD2315Q-T4
IC319	8-759-561-46	s	IC AD8014ART-REEL7
IC320	8-759-561-46	s	IC AD8014ART-REEL7
IC321	8-759-561-46	s	IC AD8014ART-REEL7
IC502	6-700-387-01	s	IC EPC2LC20-TP
IC503	8-752-414-92	s	IC CXD2309AQ-T6
IC505	8-752-391-99	s	IC CXD2315Q-T4
IC506	8-752-391-99	s	IC CXD2315Q-T4
IC507	8-752-391-99	s	IC CXD2315Q-T4
IC508	6-706-478-01	s	IC TC7SET08FU(T5RSOJF)
IC509	6-706-478-01	s	IC TC7SET08FU(T5RSOJF)
IC510	8-759-561-46	s	IC AD8014ART-REEL7
IC511	8-759-561-46	s	IC AD8014ART-REEL7
IC512	8-759-561-46	s	IC AD8014ART-REEL7
IC516	8-759-523-02	s	IC TC74HC4053AFT(EL)
IC517	8-759-523-02	s	IC TC74HC4053AFT(EL)
IC518	8-759-662-38	s	IC 74VHCT08AMTCX
IC519	8-759-662-37	s	IC 74VHCT00AMTCX
L101	1-416-344-11	s	COIL, CHOKE 10UH
L102	1-416-344-11	s	COIL, CHOKE 10UH

(EN-159B BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
L103	1-416-344-11	s	COIL, CHOKE 10UH
L104	1-416-344-11	s	COIL, CHOKE 10UH
L105	1-414-398-11	s	INDUCTOR (SMD) 10UH
L106	1-414-398-11	s	INDUCTOR (SMD) 10UH
L201	1-414-398-11	s	INDUCTOR (SMD) 10UH
L202	1-414-398-11	s	INDUCTOR (SMD) 10UH
L203	1-412-947-11	s	INDUCTOR 4.7UH (2520)
L204	1-414-400-11	s	INDUCTOR, 22UH
L205	1-414-400-11	s	INDUCTOR, 22UH
L206	1-414-398-11	s	INDUCTOR (SMD) 10UH
L207	1-414-398-11	s	INDUCTOR (SMD) 10UH
L208	1-414-398-11	s	INDUCTOR (SMD) 10UH
L209	1-414-398-11	s	INDUCTOR (SMD) 10UH
L301	1-414-398-11	s	INDUCTOR (SMD) 10UH
L302	1-414-398-11	s	INDUCTOR (SMD) 10UH
L303	1-412-947-11	s	INDUCTOR 4.7UH (2520)
L304	1-414-398-11	s	INDUCTOR (SMD) 10UH
L305	1-414-398-11	s	INDUCTOR (SMD) 10UH
L306	1-414-398-11	s	INDUCTOR (SMD) 10UH
L307	1-414-398-11	s	INDUCTOR (SMD) 10UH
L308	1-414-398-11	s	INDUCTOR (SMD) 10UH
L309	1-414-398-11	s	INDUCTOR (SMD) 10UH
L310	1-412-955-11	s	INDUCTOR 22UH (2520)
L311	1-414-398-11	s	INDUCTOR (SMD) 10UH
L312	1-414-398-11	s	INDUCTOR (SMD) 10UH
L313	1-414-398-11	s	INDUCTOR (SMD) 10UH
L314	1-414-398-11	s	INDUCTOR (SMD) 10UH
L315	1-414-398-11	s	INDUCTOR (SMD) 10UH
L316	1-414-398-11	s	INDUCTOR (SMD) 10UH
L317	1-414-398-11	s	INDUCTOR (SMD) 10UH
L318	1-414-398-11	s	INDUCTOR (SMD) 10UH
L319	1-412-947-11	s	INDUCTOR 4.7UH (2520)
L320	1-412-947-11	s	INDUCTOR 4.7UH (2520)
L321	1-412-947-11	s	INDUCTOR 4.7UH (2520)
L322	1-414-398-11	s	INDUCTOR (SMD) 10UH
L323	1-414-398-11	s	INDUCTOR (SMD) 10UH
L324	1-414-398-11	s	INDUCTOR (SMD) 10UH
L325	1-414-398-11	s	INDUCTOR (SMD) 10UH
L326	1-414-398-11	s	INDUCTOR (SMD) 10UH
L327	1-414-398-11	s	INDUCTOR (SMD) 10UH
L501	1-414-398-11	s	INDUCTOR (SMD) 10UH
L502	1-414-398-11	s	INDUCTOR (SMD) 10UH
L503	1-414-398-11	s	INDUCTOR (SMD) 10UH
L504	1-414-398-11	s	INDUCTOR (SMD) 10UH
L505	1-412-947-11	s	INDUCTOR 4.7UH (2520)
L506	1-412-947-11	s	INDUCTOR 4.7UH (2520)
L507	1-412-947-11	s	INDUCTOR 4.7UH (2520)
L508	1-414-398-11	s	INDUCTOR (SMD) 10UH
L509	1-414-398-11	s	INDUCTOR (SMD) 10UH
L510	1-414-398-11	s	INDUCTOR (SMD) 10UH
L511	1-414-398-11	s	INDUCTOR (SMD) 10UH
L512	1-414-398-11	s	INDUCTOR (SMD) 10UH
L513	1-414-398-11	s	INDUCTOR (SMD) 10UH
L514	1-414-398-11	s	INDUCTOR (SMD) 10UH
L515	1-414-398-11	s	INDUCTOR (SMD) 10UH
L516	1-414-398-11	s	INDUCTOR (SMD) 10UH
L517	1-414-398-11	s	INDUCTOR (SMD) 10UH
L518	1-412-955-11	s	INDUCTOR 22UH (2520)
L519	1-414-398-11	s	INDUCTOR (SMD) 10UH

(EN-159B BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
L520	1-414-398-11	s	INDUCTOR (SMD) 10UH
L521	1-414-398-11	s	INDUCTOR (SMD) 10UH
L522	1-414-398-11	s	INDUCTOR (SMD) 10UH
L523	1-414-398-11	s	INDUCTOR (SMD) 10UH
L524	1-414-398-11	s	INDUCTOR (SMD) 10UH
Q101	8-729-230-27	s	TRANSISTOR 2SA1213Y-TE12L
Q102	8-729-927-99	s	TRANSISTOR 2SC4617R
Q103	8-729-230-27	s	TRANSISTOR 2SA1213Y-TE12L
Q104	8-729-927-99	s	TRANSISTOR 2SC4617R
Q105	8-729-927-99	s	TRANSISTOR 2SC4617R
Q201	8-729-928-19	s	TRANSISTOR 2SA1774R
Q202	8-729-927-99	s	TRANSISTOR 2SC4617R
Q203	8-729-927-99	s	TRANSISTOR 2SC4617R
Q204	8-729-927-99	s	TRANSISTOR 2SC4617R
Q205	8-729-927-99	s	TRANSISTOR 2SC4617R
Q206	8-729-927-99	s	TRANSISTOR 2SC4617R
Q207	8-729-927-99	s	TRANSISTOR 2SC4617R
Q208	8-729-927-99	s	TRANSISTOR 2SC4617R
Q209	8-729-927-99	s	TRANSISTOR 2SC4617R
Q501	8-729-143-13	s	TRANSISTOR 2SC4176-B34
Q502	8-729-143-13	s	TRANSISTOR 2SC4176-B34
Q503	8-729-143-13	s	TRANSISTOR 2SC4176-B34
Q504	8-729-927-99	s	TRANSISTOR 2SC4617R
Q505	8-729-928-19	s	TRANSISTOR 2SA1774R
R101	1-218-883-11	s	RESISTOR,CHIP 33K 1/10W (1608)
R102	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/10W(1608)
R103	1-218-875-11	s	RESISTOR,CHIP 15K 1/10W (1608)
R104	1-218-875-11	s	RESISTOR,CHIP 15K 1/10W (1608)
R105	1-218-879-11	s	RESISTOR,CHIP 22K 1/10W (1608)
R106	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/10W(1608)
R107	1-218-891-11	s	RESISTOR,CHIP 68K 1/10W (1608)
R108	1-218-891-11	s	RESISTOR,CHIP 68K 1/10W (1608)
R109	1-218-875-11	s	RESISTOR,CHIP 15K 1/10W (1608)
R110	1-218-875-11	s	RESISTOR,CHIP 15K 1/10W (1608)
R111	1-218-831-11	s	RESISTOR, CHIP 220 1/10W(1608)
R112	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R113	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/10W(1608)
R114	1-218-875-11	s	RESISTOR,CHIP 15K 1/10W (1608)
R115	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R116	1-218-831-11	s	RESISTOR, CHIP 220 1/10W(1608)
R117	1-218-831-11	s	RESISTOR, CHIP 220 1/10W(1608)
R118	1-218-831-11	s	RESISTOR, CHIP 220 1/10W(1608)
R119	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)
R120	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)
R121	1-218-831-11	s	RESISTOR, CHIP 220 1/10W(1608)
R122	1-218-851-11	s	RESISTOR,CHIP 1.5K 1/10W(1608)
R123	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R124	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R125	1-218-851-11	s	RESISTOR,CHIP 1.5K 1/10W(1608)
R126	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R127	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R128	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R129	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R130	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/10W(1608)
R131	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R132	1-218-879-11	s	RESISTOR,CHIP 22K 1/10W (1608)
R133	1-218-879-11	s	RESISTOR,CHIP 22K 1/10W (1608)
R134	1-218-859-11	s	RESISTOR,CHIP 3.3K 1/10W(1608)
R135	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)

(EN-159B BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R136	1-218-879-11	s	RESISTOR,CHIP 22K 1/10W (1608)
R137	1-218-887-11	s	RESISTOR,CHIP 47K 1/10W (1608)
R138	1-218-879-11	s	RESISTOR,CHIP 22K 1/10W (1608)
R139	1-218-879-11	s	RESISTOR,CHIP 22K 1/10W (1608)
R140	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R141	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/10W(1608)
R142	1-218-863-11	s	RESISTOR,CHIP 4.7K 1/10W(1608)
R143	1-218-887-11	s	RESISTOR,CHIP 47K 1/10W (1608)
R144	1-218-887-11	s	RESISTOR,CHIP 47K 1/10W (1608)
R145	1-218-879-11	s	RESISTOR,CHIP 22K 1/10W (1608)
R146	1-218-867-11	s	RESISTOR,CHIP 6.8K 1/10W(1608)
R147	1-218-883-11	s	RESISTOR,CHIP 33K 1/10W (1608)
R148	1-218-831-11	s	RESISTOR, CHIP 220 1/10W(1608)
R149	1-218-831-11	s	RESISTOR, CHIP 220 1/10W(1608)
R150	1-218-831-11	s	RESISTOR, CHIP 220 1/10W(1608)
R151	1-218-831-11	s	RESISTOR, CHIP 220 1/10W(1608)
R152	1-218-831-11	s	RESISTOR, CHIP 220 1/10W(1608)
R153	1-211-969-11	s	RESISTOR,CHIP 10 1/10W (1608)
R154	1-211-969-11	s	RESISTOR,CHIP 10 1/10W (1608)
R155	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R156	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R157	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R158	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R159	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R160	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R161	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R165	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R166	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R168	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R171	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R174	1-218-895-11	s	RESISTOR,CHIP 100K 1/10W(1608)
R175	1-218-895-11	s	RESISTOR,CHIP 100K 1/10W(1608)
R176	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)
R177	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)
R201	1-218-835-11	s	RESISTOR,CHIP 330 1/10W (1608)
R202	1-218-839-11	s	RESISTOR,CHIP 470 1/10W (1608)
R203	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R204	1-211-985-11	s	RESISTOR,CHIP 47 1/10W (1608)
R205	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/10W(1608)
R206	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/10W(1608)
R207	1-218-859-11	s	RESISTOR,CHIP 3.3K 1/10W(1608)
R208	1-218-859-11	s	RESISTOR,CHIP 3.3K 1/10W(1608)
R209	1-218-887-11	s	RESISTOR,CHIP 47K 1/10W (1608)
R210	1-211-985-11	s	RESISTOR,CHIP 47 1/10W (1608)
R211	1-211-985-11	s	RESISTOR,CHIP 47 1/10W (1608)
R212	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R213	1-218-863-11	s	RESISTOR,CHIP 4.7K 1/10W(1608)
R214	1-218-863-11	s	RESISTOR,CHIP 4.7K 1/10W(1608)
R215	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R216	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R217	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R218	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R219	1-218-863-11	s	RESISTOR,CHIP 4.7K 1/10W(1608)
R220	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)
R221	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R222	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R223	1-211-985-11	s	RESISTOR,CHIP 47 1/10W (1608)
R224	1-211-985-11	s	RESISTOR,CHIP 47 1/10W (1608)
R225	1-211-985-11	s	RESISTOR,CHIP 47 1/10W (1608)

(EN-159B BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R226	1-211-985-11	s	RESISTOR,CHIP 47 1/10W (1608)
R227	1-211-985-11	s	RESISTOR,CHIP 47 1/10W (1608)
R228	1-211-985-11	s	RESISTOR,CHIP 47 1/10W (1608)
R229	1-211-985-11	s	RESISTOR,CHIP 47 1/10W (1608)
R230	1-211-985-11	s	RESISTOR,CHIP 47 1/10W (1608)
R231	1-211-985-11	s	RESISTOR,CHIP 47 1/10W (1608)
R232	1-211-985-11	s	RESISTOR,CHIP 47 1/10W (1608)
R233	1-216-857-11	s	RESISTOR,CHIP 1M 1/10W(1608)
R234	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R235	1-218-907-11	s	RESISTOR,CHIP 330K 1/10W(1608)
R236	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R237	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R238	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R239	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R240	1-218-907-11	s	RESISTOR,CHIP 330K 1/10W(1608)
R241	1-218-879-11	s	RESISTOR,CHIP 22K 1/10W (1608)
R242	1-218-899-11	s	RESISTOR,CHIP 150K 1/10W(1608)
R243	1-218-895-11	s	RESISTOR,CHIP 100K 1/10W(1608)
R244	1-218-879-11	s	RESISTOR,CHIP 22K 1/10W (1608)
R245	1-218-879-11	s	RESISTOR,CHIP 22K 1/10W (1608)
R246	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/10W(1608)
R247	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R248	1-218-879-11	s	RESISTOR,CHIP 22K 1/10W (1608)
R249	1-218-859-11	s	RESISTOR,CHIP 3.3K 1/10W(1608)
R250	1-218-915-11	s	RESISTOR,CHIP 680K 1/10W(1608)
R251	1-218-911-11	s	RESISTOR,CHIP 470K 1/10W(1608)
R252	1-218-915-11	s	RESISTOR,CHIP 680K 1/10W(1608)
R253	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R254	1-218-843-11	s	RESISTOR,CHIP 680 1/10W (1608)
R255	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R256	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R257	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R258	1-218-895-11	s	RESISTOR,CHIP 100K 1/10W(1608)
R259	1-218-863-11	s	RESISTOR,CHIP 4.7K 1/10W(1608)
R260	1-211-985-11	s	RESISTOR,CHIP 47 1/10W (1608)
R261	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R262	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R263	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R264	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R265	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R266	1-218-887-11	s	RESISTOR,CHIP 47K 1/10W (1608)
R267	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R268	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R269	1-218-887-11	s	RESISTOR,CHIP 47K 1/10W (1608)
R271	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R272	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R273	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R274	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R275	1-218-887-11	s	RESISTOR,CHIP 47K 1/10W (1608)
R276	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)
R277	1-218-887-11	s	RESISTOR,CHIP 47K 1/10W (1608)
R278	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)
R279	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R280	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R281	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R282	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R283	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R284	1-218-831-11	s	RESISTOR, CHIP 220 1/10W(1608)
R285	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)

(EN-159B BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R286	1-211-969-11	s	RESISTOR,CHIP 10 1/10W (1608)
R287	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R288	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R289	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R290	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R291	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R292	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R293	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R294	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R295	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R296	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R297	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R298	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R299	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R301	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R302	1-218-839-11	s	RESISTOR,CHIP 470 1/10W (1608)
R303	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/10W(1608)
R305	1-218-883-11	s	RESISTOR,CHIP 33K 1/10W (1608)
R306	1-218-879-11	s	RESISTOR,CHIP 22K 1/10W (1608)
R307	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)
R308	1-218-839-11	s	RESISTOR,CHIP 470 1/10W (1608)
R309	1-218-839-11	s	RESISTOR,CHIP 470 1/10W (1608)
R311	1-218-895-11	s	RESISTOR,CHIP 100K 1/10W(1608)
R312	1-218-831-11	s	RESISTOR, CHIP 220 1/10W(1608)
R313	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R314	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R315	1-211-985-11	s	RESISTOR,CHIP 47 1/10W (1608)
R316	1-211-985-11	s	RESISTOR,CHIP 47 1/10W (1608)
R317	1-211-985-11	s	RESISTOR,CHIP 47 1/10W (1608)
R318	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R319	1-211-985-11	s	RESISTOR,CHIP 47 1/10W (1608)
R320	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R321	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R322	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)
R323	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/10W(1608)
R324	1-218-835-11	s	RESISTOR,CHIP 330 1/10W (1608)
R325	1-218-851-11	s	RESISTOR,CHIP 1.5K 1/10W(1608)
R326	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R327	1-211-969-11	s	RESISTOR,CHIP 10 1/10W (1608)
R329	1-218-879-11	s	RESISTOR,CHIP 22K 1/10W (1608)
R331	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R332	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R333	1-211-985-11	s	RESISTOR,CHIP 47 1/10W (1608)
R334	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R341	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R342	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R343	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R344	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R345	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R346	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R347	1-218-863-11	s	RESISTOR,CHIP 4.7K 1/10W(1608)
R348	1-218-863-11	s	RESISTOR,CHIP 4.7K 1/10W(1608)
R349	1-211-969-11	s	RESISTOR,CHIP 10 1/10W (1608)
R350	1-218-831-11	s	RESISTOR, CHIP 220 1/10W(1608)
R351	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R352	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R353	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R354	1-218-863-11	s	RESISTOR,CHIP 4.7K 1/10W(1608)
R355	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)

(EN-159B BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R356	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)
R357	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R358	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R360	1-218-831-11	s	RESISTOR, CHIP 220 1/10W(1608)
R361	1-218-831-11	s	RESISTOR, CHIP 220 1/10W(1608)
R362	1-218-831-11	s	RESISTOR, CHIP 220 1/10W(1608)
R363	1-218-831-11	s	RESISTOR, CHIP 220 1/10W(1608)
R364	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R365	1-211-985-11	s	RESISTOR,CHIP 47 1/10W (1608)
R366	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/10W(1608)
R367	1-218-831-11	s	RESISTOR, CHIP 220 1/10W(1608)
R368	1-218-831-11	s	RESISTOR, CHIP 220 1/10W(1608)
R369	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R370	1-218-831-11	s	RESISTOR, CHIP 220 1/10W(1608)
R371	1-218-831-11	s	RESISTOR, CHIP 220 1/10W(1608)
R372	1-218-831-11	s	RESISTOR, CHIP 220 1/10W(1608)
R373	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)
R375	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R376	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/10W(1608)
R377	1-218-851-11	s	RESISTOR,CHIP 1.5K 1/10W(1608)
R378	1-211-985-11	s	RESISTOR,CHIP 47 1/10W (1608)
R379	1-218-851-11	s	RESISTOR,CHIP 1.5K 1/10W(1608)
R380	1-218-843-11	s	RESISTOR,CHIP 680 1/10W (1608)
R381	1-218-851-11	s	RESISTOR,CHIP 1.5K 1/10W(1608)
R382	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R383	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R384	1-218-843-11	s	RESISTOR,CHIP 680 1/10W (1608)
R387	1-218-827-11	s	RESISTOR,CHIP 150 1/10W (1608)
R390	1-218-831-11	s	RESISTOR, CHIP 220 1/10W(1608)
R391	1-218-827-11	s	RESISTOR,CHIP 150 1/10W (1608)
R392	1-218-827-11	s	RESISTOR,CHIP 150 1/10W (1608)
R393	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R394	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R396	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R398	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R400	1-218-859-11	s	RESISTOR,CHIP 3.3K 1/10W(1608)
R401	1-218-859-11	s	RESISTOR,CHIP 3.3K 1/10W(1608)
R402	1-218-859-11	s	RESISTOR,CHIP 3.3K 1/10W(1608)
R403	1-218-831-11	s	RESISTOR, CHIP 220 1/10W(1608)
R404	1-218-831-11	s	RESISTOR, CHIP 220 1/10W(1608)
R405	1-218-831-11	s	RESISTOR, CHIP 220 1/10W(1608)
R406	1-218-835-11	s	RESISTOR,CHIP 330 1/10W (1608)
R407	1-218-835-11	s	RESISTOR,CHIP 330 1/10W (1608)
R408	1-218-835-11	s	RESISTOR,CHIP 330 1/10W (1608)
R409	1-218-851-11	s	RESISTOR,CHIP 1.5K 1/10W(1608)
R410	1-218-851-11	s	RESISTOR,CHIP 1.5K 1/10W(1608)
R411	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/10W(1608)
R412	1-218-851-11	s	RESISTOR,CHIP 1.5K 1/10W(1608)
R413	1-218-851-11	s	RESISTOR,CHIP 1.5K 1/10W(1608)
R414	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/10W(1608)
R415	1-218-851-11	s	RESISTOR,CHIP 1.5K 1/10W(1608)
R416	1-218-851-11	s	RESISTOR,CHIP 1.5K 1/10W(1608)
R417	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/10W(1608)
R418	1-218-887-11	s	RESISTOR,CHIP 47K 1/10W (1608)
R419	1-218-903-11	s	RESISTOR,CHIP 220K 1/10W(1608)
R420	1-218-887-11	s	RESISTOR,CHIP 47K 1/10W (1608)
R421	1-218-903-11	s	RESISTOR,CHIP 220K 1/10W(1608)
R422	1-218-887-11	s	RESISTOR,CHIP 47K 1/10W (1608)
R423	1-218-903-11	s	RESISTOR,CHIP 220K 1/10W(1608)

(EN-159B BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R424	1-218-875-11	s	RESISTOR,CHIP 15K 1/10W (1608)
R425	1-218-875-11	s	RESISTOR,CHIP 15K 1/10W (1608)
R426	1-218-875-11	s	RESISTOR,CHIP 15K 1/10W (1608)
R427	1-218-835-11	s	RESISTOR,CHIP 330 1/10W (1608)
R428	1-218-835-11	s	RESISTOR,CHIP 330 1/10W (1608)
R429	1-218-835-11	s	RESISTOR,CHIP 330 1/10W (1608)
R430	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R431	1-218-851-11	s	RESISTOR,CHIP 1.5K 1/10W(1608)
R432	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R433	1-218-851-11	s	RESISTOR,CHIP 1.5K 1/10W(1608)
R434	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R435	1-218-851-11	s	RESISTOR,CHIP 1.5K 1/10W(1608)
R436	1-218-851-11	s	RESISTOR,CHIP 1.5K 1/10W(1608)
R437	1-218-867-11	s	RESISTOR,CHIP 6.8K 1/10W(1608)
R438	1-218-843-11	s	RESISTOR,CHIP 680 1/10W (1608)
R439	1-218-851-11	s	RESISTOR,CHIP 1.5K 1/10W(1608)
R440	1-218-867-11	s	RESISTOR,CHIP 6.8K 1/10W(1608)
R441	1-218-843-11	s	RESISTOR,CHIP 680 1/10W (1608)
R442	1-218-851-11	s	RESISTOR,CHIP 1.5K 1/10W(1608)
R443	1-218-867-11	s	RESISTOR,CHIP 6.8K 1/10W(1608)
R444	1-218-843-11	s	RESISTOR,CHIP 680 1/10W (1608)
R445	1-211-989-11	s	RESISTOR,CHIP 68 1/10W (1608)
R446	1-211-989-11	s	RESISTOR,CHIP 68 1/10W (1608)
R447	1-211-989-11	s	RESISTOR,CHIP 68 1/10W (1608)
R448	1-218-843-11	s	RESISTOR,CHIP 680 1/10W (1608)
R449	1-218-843-11	s	RESISTOR,CHIP 680 1/10W (1608)
R450	1-218-843-11	s	RESISTOR,CHIP 680 1/10W (1608)
R451	1-218-831-11	s	RESISTOR, CHIP 220 1/10W(1608)
R452	1-218-831-11	s	RESISTOR, CHIP 220 1/10W(1608)
R453	1-218-831-11	s	RESISTOR, CHIP 220 1/10W(1608)
R454	1-218-831-11	s	RESISTOR, CHIP 220 1/10W(1608)
R455	1-218-831-11	s	RESISTOR, CHIP 220 1/10W(1608)
R456	1-218-831-11	s	RESISTOR, CHIP 220 1/10W(1608)
R457	1-218-831-11	s	RESISTOR, CHIP 220 1/10W(1608)
R458	1-211-969-11	s	RESISTOR,CHIP 10 1/10W (1608)
R459	1-211-969-11	s	RESISTOR,CHIP 10 1/10W (1608)
R501	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R502	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R503	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)
R504	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R505	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R506	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R507	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R508	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R509	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R510	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R511	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R512	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R513	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R514	1-211-985-11	s	RESISTOR,CHIP 47 1/10W (1608)
R515	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R516	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)
R517	1-211-985-11	s	RESISTOR,CHIP 47 1/10W (1608)
R518	1-218-867-11	s	RESISTOR,CHIP 6.8K 1/10W(1608)
R519	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)
R520	1-218-859-11	s	RESISTOR,CHIP 3.3K 1/10W(1608)
R521	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/10W(1608)
R522	1-218-835-11	s	RESISTOR,CHIP 330 1/10W (1608)
R523	1-218-835-11	s	RESISTOR,CHIP 330 1/10W (1608)

(EN-159B BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R524	1-218-835-11	s	RESISTOR,CHIP 330 1/10W (1608)
R525	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)
R526	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)
R527	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)
R528	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)
R529	1-218-859-11	s	RESISTOR,CHIP 3.3K 1/10W(1608)
R530	1-218-837-11	s	RESISTOR,CHIP 390 1/10W (1608)
R531	1-218-859-11	s	RESISTOR,CHIP 3.3K 1/10W(1608)
R532	1-218-837-11	s	RESISTOR,CHIP 390 1/10W (1608)
R533	1-218-859-11	s	RESISTOR,CHIP 3.3K 1/10W(1608)
R534	1-218-837-11	s	RESISTOR,CHIP 390 1/10W (1608)
R535	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)
R536	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)
R537	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)
R538	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R539	1-218-863-11	s	RESISTOR,CHIP 4.7K 1/10W(1608)
R540	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R541	1-218-863-11	s	RESISTOR,CHIP 4.7K 1/10W(1608)
R542	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R543	1-218-863-11	s	RESISTOR,CHIP 4.7K 1/10W(1608)
R544	1-211-985-11	s	RESISTOR,CHIP 47 1/10W (1608)
R545	1-211-985-11	s	RESISTOR,CHIP 47 1/10W (1608)
R546	1-211-985-11	s	RESISTOR,CHIP 47 1/10W (1608)
R547	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R548	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R549	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R550	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R551	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R552	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R553	1-211-985-11	s	RESISTOR,CHIP 47 1/10W (1608)
R554	1-211-985-11	s	RESISTOR,CHIP 47 1/10W (1608)
R555	1-211-985-11	s	RESISTOR,CHIP 47 1/10W (1608)
R556	1-218-843-11	s	RESISTOR,CHIP 680 1/10W (1608)
R557	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R558	1-218-843-11	s	RESISTOR,CHIP 680 1/10W (1608)
R559	1-218-859-11	s	RESISTOR,CHIP 3.3K 1/10W(1608)
R560	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R561	1-218-843-11	s	RESISTOR,CHIP 680 1/10W (1608)
R562	1-218-859-11	s	RESISTOR,CHIP 3.3K 1/10W(1608)
R563	1-218-859-11	s	RESISTOR,CHIP 3.3K 1/10W(1608)
R564	1-218-831-11	s	RESISTOR, CHIP 220 1/10W(1608)
R565	1-218-831-11	s	RESISTOR, CHIP 220 1/10W(1608)
R566	1-218-831-11	s	RESISTOR, CHIP 220 1/10W(1608)
R567	1-218-831-11	s	RESISTOR, CHIP 220 1/10W(1608)
R568	1-218-899-11	s	RESISTOR,CHIP 150K 1/10W(1608)
R569	1-218-831-11	s	RESISTOR, CHIP 220 1/10W(1608)
R570	1-218-835-11	s	RESISTOR,CHIP 330 1/10W (1608)
R571	1-218-835-11	s	RESISTOR,CHIP 330 1/10W (1608)
R572	1-218-835-11	s	RESISTOR,CHIP 330 1/10W (1608)
R573	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)
R574	1-218-863-11	s	RESISTOR,CHIP 4.7K 1/10W(1608)
R575	1-218-883-11	s	RESISTOR,CHIP 33K 1/10W (1608)
R576	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)
R577	1-218-863-11	s	RESISTOR,CHIP 4.7K 1/10W(1608)
R578	1-218-883-11	s	RESISTOR,CHIP 33K 1/10W (1608)
R579	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)
R580	1-218-859-11	s	RESISTOR,CHIP 3.3K 1/10W(1608)
R581	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/10W(1608)
R582	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)

(EN-159B BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R583	1-218-859-11	s	RESISTOR,CHIP 3.3K 1/10W(1608)
R584	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/10W(1608)
R585	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)
R586	1-218-859-11	s	RESISTOR,CHIP 3.3K 1/10W(1608)
R587	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/10W(1608)
R588	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R589	1-218-875-11	s	RESISTOR,CHIP 15K 1/10W (1608)
R590	1-218-875-11	s	RESISTOR,CHIP 15K 1/10W (1608)
R591	1-218-875-11	s	RESISTOR,CHIP 15K 1/10W (1608)
R592	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/10W(1608)
R593	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R594	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R595	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R596	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R597	1-218-859-11	s	RESISTOR,CHIP 3.3K 1/10W(1608)
R598	1-218-887-11	s	RESISTOR,CHIP 47K 1/10W (1608)
R599	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R600	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R601	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R602	1-218-851-11	s	RESISTOR,CHIP 1.5K 1/10W(1608)
R603	1-218-887-11	s	RESISTOR,CHIP 47K 1/10W (1608)
R604	1-218-831-11	s	RESISTOR, CHIP 220 1/10W(1608)
R605	1-218-831-11	s	RESISTOR, CHIP 220 1/10W(1608)
R606	1-218-859-11	s	RESISTOR,CHIP 3.3K 1/10W(1608)
R607	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R608	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)
R609	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R610	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R611	1-218-827-11	s	RESISTOR,CHIP 150 1/10W (1608)
R612	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R613	1-218-827-11	s	RESISTOR,CHIP 150 1/10W (1608)
R614	1-218-859-11	s	RESISTOR,CHIP 3.3K 1/10W(1608)
R615	1-218-859-11	s	RESISTOR,CHIP 3.3K 1/10W(1608)
R616	1-218-859-11	s	RESISTOR,CHIP 3.3K 1/10W(1608)
R617	1-218-859-11	s	RESISTOR,CHIP 3.3K 1/10W(1608)
R618	1-218-851-11	s	RESISTOR,CHIP 1.5K 1/10W(1608)
R619	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R620	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R621	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R622	1-218-851-11	s	RESISTOR,CHIP 1.5K 1/10W(1608)
R623	1-218-827-11	s	RESISTOR,CHIP 150 1/10W (1608)
R624	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R625	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R626	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R627	1-218-863-11	s	RESISTOR,CHIP 4.7K 1/10W(1608)
R628	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R629	1-218-887-11	s	RESISTOR,CHIP 47K 1/10W (1608)
R630	1-218-843-11	s	RESISTOR,CHIP 680 1/10W (1608)
R631	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R632	1-218-887-11	s	RESISTOR,CHIP 47K 1/10W (1608)
R633	1-218-843-11	s	RESISTOR,CHIP 680 1/10W (1608)
R634	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R635	1-211-977-11	s	RESISTOR,CHIP 22 1/10W (1608)
R636	1-218-851-11	s	RESISTOR,CHIP 1.5K 1/10W(1608)
R637	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R638	1-211-989-11	s	RESISTOR,CHIP 68 1/10W (1608)
R639	1-211-989-11	s	RESISTOR,CHIP 68 1/10W (1608)
R640	1-218-843-11	s	RESISTOR,CHIP 680 1/10W (1608)
R641	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)

(EN-159B BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R642	1-218-831-11	s	RESISTOR, CHIP 220 1/10W(1608)
R643	1-218-843-11	s	RESISTOR,CHIP 680 1/10W (1608)
R644	1-218-859-11	s	RESISTOR,CHIP 3.3K 1/10W(1608)
R645	1-218-851-11	s	RESISTOR,CHIP 1.5K 1/10W(1608)
R646	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R647	1-218-831-11	s	RESISTOR, CHIP 220 1/10W(1608)
R648	1-218-875-11	s	RESISTOR,CHIP 15K 1/10W (1608)
R649	1-218-879-11	s	RESISTOR,CHIP 22K 1/10W (1608)
R650	1-218-839-11	s	RESISTOR,CHIP 470 1/10W (1608)
R651	1-218-851-11	s	RESISTOR,CHIP 1.5K 1/10W(1608)
R652	1-218-835-11	s	RESISTOR,CHIP 330 1/10W (1608)
R653	1-218-831-11	s	RESISTOR, CHIP 220 1/10W(1608)
R654	1-218-827-11	s	RESISTOR,CHIP 150 1/10W (1608)
R655	1-218-827-11	s	RESISTOR,CHIP 150 1/10W (1608)
R656	1-211-989-11	s	RESISTOR,CHIP 68 1/10W (1608)
R657	1-218-827-11	s	RESISTOR,CHIP 150 1/10W (1608)
R658	1-218-827-11	s	RESISTOR,CHIP 150 1/10W (1608)
R659	1-218-843-11	s	RESISTOR,CHIP 680 1/10W (1608)
R660	1-218-831-11	s	RESISTOR, CHIP 220 1/10W(1608)
R661	1-218-827-11	s	RESISTOR,CHIP 150 1/10W (1608)
R662	1-218-827-11	s	RESISTOR,CHIP 150 1/10W (1608)
R664	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R665	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R666	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R671	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R672	1-218-887-11	s	RESISTOR,CHIP 47K 1/10W (1608)
R674	1-218-863-11	s	RESISTOR,CHIP 4.7K 1/10W(1608)
R675	1-218-863-11	s	RESISTOR,CHIP 4.7K 1/10W(1608)
R901	1-218-895-11	s	RESISTOR,CHIP 100K 1/10W(1608)
R902	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R903	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R904	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R905	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R906	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R907	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R908	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R909	1-218-887-11	s	RESISTOR,CHIP 47K 1/10W (1608)
R910	1-218-887-11	s	RESISTOR,CHIP 47K 1/10W (1608)
R911	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)
R912	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)
R913	1-218-831-11	s	RESISTOR, CHIP 220 1/10W(1608)
R914	1-218-843-11	s	RESISTOR,CHIP 680 1/10W (1608)
RB101	1-234-381-21	s	RES, NETWORK 100KX4 (1005)
RB102	1-234-381-21	s	RES, NETWORK 100KX4 (1005)
RB103	1-234-381-21	s	RES, NETWORK 100KX4 (1005)
RB104	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB105	1-234-381-21	s	RES, NETWORK 100KX4 (1005)
RB106	1-234-381-21	s	RES, NETWORK 100KX4 (1005)
RB107	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB108	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB109	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB110	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB111	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB112	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB113	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB114	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB115	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB116	1-234-372-11	s	RES, NETWORK 100X4 (1005)

(EN-159B BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB117	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB118	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB119	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB120	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB121	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB122	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB123	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB124	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB125	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB127	1-234-381-21	s	RES, NETWORK 100KX4 (1005)
RB128	1-234-381-21	s	RES, NETWORK 100KX4 (1005)
RB201	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB202	1-234-373-21	s	RES, NETWORK 220X4 (1005)
RB203	1-234-373-21	s	RES, NETWORK 220X4 (1005)
RB204	1-234-373-21	s	RES, NETWORK 220X4 (1005)
RB205	1-234-373-21	s	RES, NETWORK 220X4 (1005)
RB206	1-234-373-21	s	RES, NETWORK 220X4 (1005)
RB207	1-234-373-21	s	RES, NETWORK 220X4 (1005)
RB208	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB209	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB210	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB211	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB212	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB213	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB214	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB215	1-234-373-21	s	RES, NETWORK 220X4 (1005)
RB216	1-234-373-21	s	RES, NETWORK 220X4 (1005)
RB217	1-234-373-21	s	RES, NETWORK 220X4 (1005)
RB218	1-234-373-21	s	RES, NETWORK 220X4 (1005)
RB219	1-234-373-21	s	RES, NETWORK 220X4 (1005)
RB220	1-234-373-21	s	RES, NETWORK 220X4 (1005)
RB221	1-234-373-21	s	RES, NETWORK 220X4 (1005)
RB222	1-234-381-21	s	RES, NETWORK 100KX4 (1005)
RB223	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB224	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB225	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB226	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB227	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB228	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB229	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB230	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB231	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB232	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB233	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB234	1-234-373-21	s	RES, NETWORK 220X4 (1005)
RB235	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB236	1-234-373-21	s	RES, NETWORK 220X4 (1005)
RB237	1-234-381-21	s	RES, NETWORK 100KX4 (1005)
RB238	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB239	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB240	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB241	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB242	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB243	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB244	1-234-373-21	s	RES, NETWORK 220X4 (1005)
RB245	1-234-373-21	s	RES, NETWORK 220X4 (1005)
RB246	1-234-373-21	s	RES, NETWORK 220X4 (1005)
RB247	1-234-373-21	s	RES, NETWORK 220X4 (1005)
RB248	1-234-373-21	s	RES, NETWORK 220X4 (1005)

(EN-159B BOARD)

Ref. No. or Q'ty	Part No.	SP	Description	
RB249	1-234-372-11	s	RES, NETWORK 100X4	(1005)
RB250	1-234-373-21	s	RES, NETWORK 220X4	(1005)
RB251	1-234-372-11	s	RES, NETWORK 100X4	(1005)
RB252	1-234-372-11	s	RES, NETWORK 100X4	(1005)
RB253	1-234-372-11	s	RES, NETWORK 100X4	(1005)
RB254	1-234-372-11	s	RES, NETWORK 100X4	(1005)
RB255	1-234-372-11	s	RES, NETWORK 100X4	(1005)
RB301	1-234-373-21	s	RES, NETWORK 220X4	(1005)
RB302	1-234-373-21	s	RES, NETWORK 220X4	(1005)
RB303	1-234-372-11	s	RES, NETWORK 100X4	(1005)
RB304	1-234-372-11	s	RES, NETWORK 100X4	(1005)
RB305	1-234-379-11	s	RESISTOR,NETWORK 22KX4	(1005)
RB306	1-234-372-11	s	RES, NETWORK 100X4	(1005)
RB307	1-234-372-11	s	RES, NETWORK 100X4	(1005)
RB308	1-234-381-21	s	RES, NETWORK 100KX4	(1005)
RB309	1-234-381-21	s	RES, NETWORK 100KX4	(1005)
RB311	1-234-372-11	s	RES, NETWORK 100X4	(1005)
RB312	1-234-372-11	s	RES, NETWORK 100X4	(1005)
RB313	1-234-373-21	s	RES, NETWORK 220X4	(1005)
RB314	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB315	1-234-373-21	s	RES, NETWORK 220X4	(1005)
RB316	1-234-373-21	s	RES, NETWORK 220X4	(1005)
RB317	1-234-373-21	s	RES, NETWORK 220X4	(1005)
RB318	1-234-373-21	s	RES, NETWORK 220X4	(1005)
RB319	1-234-373-21	s	RES, NETWORK 220X4	(1005)
RB320	1-234-373-21	s	RES, NETWORK 220X4	(1005)
RB321	1-234-373-21	s	RES, NETWORK 220X4	(1005)
RB322	1-234-373-21	s	RES, NETWORK 220X4	(1005)
RB323	1-234-373-21	s	RES, NETWORK 220X4	(1005)
RB324	1-234-373-21	s	RES, NETWORK 220X4	(1005)
RB325	1-234-373-21	s	RES, NETWORK 220X4	(1005)
RB326	1-234-373-21	s	RES, NETWORK 220X4	(1005)
RB327	1-234-373-21	s	RES, NETWORK 220X4	(1005)
RB328	1-234-373-21	s	RES, NETWORK 220X4	(1005)
RB329	1-234-373-21	s	RES, NETWORK 220X4	(1005)
RB330	1-234-373-21	s	RES, NETWORK 220X4	(1005)
RB331	1-234-373-21	s	RES, NETWORK 220X4	(1005)
RB501	1-234-372-11	s	RES, NETWORK 100X4	(1005)
RB502	1-234-372-11	s	RES, NETWORK 100X4	(1005)
RB503	1-234-372-11	s	RES, NETWORK 100X4	(1005)
RB504	1-234-372-11	s	RES, NETWORK 100X4	(1005)
RB505	1-234-372-11	s	RES, NETWORK 100X4	(1005)
RB506	1-234-372-11	s	RES, NETWORK 100X4	(1005)
RB507	1-234-372-11	s	RES, NETWORK 100X4	(1005)
RB508	1-234-372-11	s	RES, NETWORK 100X4	(1005)
RB509	1-234-373-21	s	RES, NETWORK 220X4	(1005)
RB510	1-234-373-21	s	RES, NETWORK 220X4	(1005)
RB511	1-234-373-21	s	RES, NETWORK 220X4	(1005)
RB512	1-234-373-21	s	RES, NETWORK 220X4	(1005)
RB513	1-234-373-21	s	RES, NETWORK 220X4	(1005)
RB514	1-234-372-11	s	RES, NETWORK 100X4	(1005)
RB515	1-234-373-21	s	RES, NETWORK 220X4	(1005)
RB516	1-234-373-21	s	RES, NETWORK 220X4	(1005)
RB517	1-234-372-11	s	RES, NETWORK 100X4	(1005)
RB518	1-234-373-21	s	RES, NETWORK 220X4	(1005)
RB519	1-234-372-11	s	RES, NETWORK 100X4	(1005)
RB520	1-234-373-21	s	RES, NETWORK 220X4	(1005)
RB521	1-234-373-21	s	RES, NETWORK 220X4	(1005)
RB522	1-234-373-21	s	RES, NETWORK 220X4	(1005)

(EN-159B BOARD)

Ref. No. or Q'ty	Part No.	SP	Description	
RB523	1-234-373-21	s	RES, NETWORK 220X4	(1005)
RB524	1-234-373-21	s	RES, NETWORK 220X4	(1005)
RB525	1-234-373-21	s	RES, NETWORK 220X4	(1005)
RB526	1-234-373-21	s	RES, NETWORK 220X4	(1005)
RB527	1-234-373-21	s	RES, NETWORK 220X4	(1005)
RB528	1-234-373-21	s	RES, NETWORK 220X4	(1005)
RB535	1-234-523-21	s	RESISTOR,CHIP NETWORK	
RB536	1-234-523-21	s	RESISTOR,CHIP NETWORK	
RB537	1-234-523-21	s	RESISTOR,CHIP NETWORK	
RB538	1-234-523-21	s	RESISTOR,CHIP NETWORK	
RB544	1-234-372-11	s	RES, NETWORK 100X4	(1005)
RV301	1-225-793-11	s	RES, ADJ, CERMET 20K	
RV302	1-225-792-21	s	RES, ADJ, CERMET 10K	
RV303	1-225-787-21	s	RES, ADJ, CERMET 500	
RV304	1-225-787-21	s	RES, ADJ, CERMET 500	
RV305	1-225-787-21	s	RES, ADJ, CERMET 500	
RV501	1-225-792-21	s	RES, ADJ, CERMET 10K	
RV502	1-225-791-21	s	RES, ADJ, CERMET 5K	
RV503	1-225-791-21	s	RES, ADJ, CERMET 5K	
RV504	1-225-787-21	s	RES, ADJ, CERMET 500	
RV505	1-225-787-21	s	RES, ADJ, CERMET 500	
RV506	1-225-787-21	s	RES, ADJ, CERMET 500	
S201	1-762-120-11	s	SWITCH, TOGGLE	
S301	1-570-711-11	s	SWITCH,SLIDE	
THP101 ⚠	1-533-817-21	s	THERMISTOR	
THP102 ⚠	1-533-817-21	s	THERMISTOR	
THP103 ⚠	1-533-817-21	s	THERMISTOR	
THP104 ⚠	1-533-817-21	s	THERMISTOR	
THP105 ⚠	1-533-817-21	s	THERMISTOR	
THP106 ⚠	1-803-615-11	s	THERMISTOR, POSITIVE	
THP107 ⚠	1-803-615-11	s	THERMISTOR, POSITIVE	
TP201	1-535-877-22	s	CHIP,CHECKER (TEST POINT)	
TP202	1-535-877-22	s	CHIP,CHECKER (TEST POINT)	
TP203	1-535-877-22	s	CHIP,CHECKER (TEST POINT)	
TP204	1-535-877-22	s	CHIP,CHECKER (TEST POINT)	
TP205	1-535-877-22	s	CHIP,CHECKER (TEST POINT)	
TP206	1-535-877-22	s	CHIP,CHECKER (TEST POINT)	
TP207	1-535-877-22	s	CHIP,CHECKER (TEST POINT)	
TP301	1-535-877-22	s	CHIP,CHECKER (TEST POINT)	
TP302	1-535-877-22	s	CHIP,CHECKER (TEST POINT)	
TP303	1-535-877-22	s	CHIP,CHECKER (TEST POINT)	
TP304	1-535-877-22	s	CHIP,CHECKER (TEST POINT)	
TP305	1-535-877-22	s	CHIP,CHECKER (TEST POINT)	
TP306	1-535-877-22	s	CHIP,CHECKER (TEST POINT)	
TP307	1-535-877-22	s	CHIP,CHECKER (TEST POINT)	
TP501	1-535-877-22	s	CHIP,CHECKER (TEST POINT)	
TP502	1-535-877-22	s	CHIP,CHECKER (TEST POINT)	
TP503	1-535-877-22	s	CHIP,CHECKER (TEST POINT)	

HIF-25 BOARD (suffix 11, 12, 31, 32)

*1: Board No. suffix 11, 31
*2: Board No. suffix 12, 32

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1129-304-A	s	MOUNTED CIRCUIT BOARD, HIF-25
4pcs	3-364-941-01	s	SCREW (+B) (2.6X5), NYLOK
C1	1-128-589-21	s	CAP, CHIP ELECT 47MF
C2	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C3	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C4	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C6	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C7	1-126-394-21	s	CAP, CHIP ELECT 10MF (4X5.7)
C11	1-128-589-21	s	CAP, CHIP ELECT 47MF
C101	1-100-507-91	s	CAP, CERAMIC 4.7MF C (1608)
C102	1-100-507-91	s	CAP, CERAMIC 4.7MF C (1608)
C103	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C104	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C105	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C106	1-100-507-91	s	CAP, CERAMIC 4.7MF C (1608)
C107	1-100-507-91	s	CAP, CERAMIC 4.7MF C (1608)
C201	1-100-507-91	s	CAP, CERAMIC 4.7MF C (1608)
C202	1-100-507-91	s	CAP, CERAMIC 4.7MF C (1608)
C203	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C204	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C205	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C206	1-100-507-91	s	CAP, CERAMIC 4.7MF C (1608)
C207	1-100-507-91	s	CAP, CERAMIC 4.7MF C (1608)
CN102	1-793-324-11	o	CONNECTOR, COAXIAL (BNC TYPE)
CN103	1-793-324-11	o	CONNECTOR, COAXIAL (BNC TYPE)
CN104	1-793-324-11	o	CONNECTOR, COAXIAL (BNC TYPE)
CN105	1-793-324-11	o	CONNECTOR, COAXIAL (BNC TYPE)
E1	1-535-877-22	s	CHIP, CHECKER
FB101	1-414-554-21	s	FERRITE, EMI (SMD) (1608)
FB102	1-414-554-21	s	FERRITE, EMI (SMD) (1608)
FB201	1-414-554-21	s	FERRITE, EMI (SMD) (1608)
FB202	1-414-554-21	s	FERRITE, EMI (SMD) (1608)
IC1	8-759-327-01	s	IC NJM062V(TE2)
IC2	6-704-976-01	s	IC ADR381ARTZ-REEL7
IC101 *1	6-702-621-01	s	IC GS1528-CKAE3
*2	6-709-619-01	s	IC GS1578ACNE3
IC201 *1	6-702-621-01	s	IC GS1528-CKAE3
*2	6-709-619-01	s	IC GS1578ACNE3
L1	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L2	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L101	1-414-457-21	s	INDUCTOR, CHIP (S) 3.3NH
L102	1-414-457-21	s	INDUCTOR, CHIP (S) 3.3NH
L201	1-414-457-21	s	INDUCTOR, CHIP (S) 3.3NH
L202	1-414-457-21	s	INDUCTOR, CHIP (S) 3.3NH
Q1	8-729-209-73	s	TRANSISTOR 2SA1213Y-TE12L
Q2	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q3	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
R1	1-208-871-81	s	RES, CHIP 220 (1005)
R2	1-208-879-81	s	RES, CHIP 470 (1005)
R3	1-208-871-81	s	RES, CHIP 220 (1005)
R4	1-208-907-81	s	RES, CHIP 6.8K (1005)
R5	1-208-871-81	s	RES, CHIP 220 (1005)
R6	1-208-919-81	s	RES, CHIP 22K (1005)

(HIF-25 BOARD suffix 11, 12, 31, 32)

Ref. No. or Q'ty	Part No.	SP	Description
R7	1-208-927-81	s	RES, CHIP 47K (1005)
R8	1-208-927-81	s	RES, CHIP 47K (1005)
R9	1-208-927-81	s	RES, CHIP 47K (1005)
R10	1-208-927-81	s	RES, CHIP 47K (1005)
R11	1-208-863-81	s	RES, CHIP 100 (1005)
R12	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R101	1-208-863-81	s	RES, CHIP 100 (1005)
R102	1-208-856-81	s	RES, CHIP 51 (1005)
R103	1-208-856-81	s	RES, CHIP 51 (1005)
R104	1-208-855-81	s	RES, CHIP 47 (1005)
R105	1-208-935-81	s	RES, CHIP 100K (1005)
R106	1-208-883-81	s	RES, CHIP 680 (1005)
R107	1-208-860-81	s	RES, CHIP 75 (1005)
R108	1-208-860-81	s	RES, CHIP 75 (1005)
R109	1-208-863-81	s	RES, CHIP 100 (1005)
R110	1-208-863-81	s	RES, CHIP 100 (1005)
R113	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R114	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R119	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R120	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R123 *1	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R124 *1	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R201	1-208-856-81	s	RES, CHIP 51 (1005)
R202	1-208-863-81	s	RES, CHIP 100 (1005)
R203	1-208-856-81	s	RES, CHIP 51 (1005)
R204	1-208-855-81	s	RES, CHIP 47 (1005)
R205	1-208-935-81	s	RES, CHIP 100K (1005)
R206	1-208-883-81	s	RES, CHIP 680 (1005)
R207	1-208-860-81	s	RES, CHIP 75 (1005)
R208	1-208-860-81	s	RES, CHIP 75 (1005)
R209	1-208-863-81	s	RES, CHIP 100 (1005)
R210	1-208-863-81	s	RES, CHIP 100 (1005)
R211	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R213	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R217	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R218	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R221 *1	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R222 *1	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R225	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R226	1-218-990-81	s	CONDUCTOR, CHIP (1005)

HIF-26 BOARD (suffix 11, 12)

*1: Board No. suffix 11
*2: Board No. suffix 12

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1132-794-A	s	MOUNTED CIRCUIT BOARD, HIF-26
8pcs	3-364-941-01	s	SCREW (+B) (2.6X5), NYLOK
C1	1-128-589-21	s	CAP, CHIP ELECT 47MF
C2	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C3	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C4	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C6	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C7	1-126-394-21	s	CAP, CHIP ELECT 10MF (4X5.7)
C11	1-128-589-21	s	CAP, CHIP ELECT 47MF
C101	1-100-507-91	s	CAP, CERAMIC 4.7MF C (1608)
C102	1-100-507-91	s	CAP, CERAMIC 4.7MF C (1608)
C103	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C104	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C105	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C106	1-100-507-91	s	CAP, CERAMIC 4.7MF C (1608)
C107	1-100-507-91	s	CAP, CERAMIC 4.7MF C (1608)
C201	1-100-507-91	s	CAP, CERAMIC 4.7MF C (1608)
C202	1-100-507-91	s	CAP, CERAMIC 4.7MF C (1608)
C203	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C204	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C205	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C206	1-100-507-91	s	CAP, CERAMIC 4.7MF C (1608)
C207	1-100-507-91	s	CAP, CERAMIC 4.7MF C (1608)
CN102	1-793-324-11	o	CONNECTOR, COAXIAL (BNC TYPE)
CN103	1-793-324-11	o	CONNECTOR, COAXIAL (BNC TYPE)
CN104	1-793-324-11	o	CONNECTOR, COAXIAL (BNC TYPE)
CN105	1-793-324-11	o	CONNECTOR, COAXIAL (BNC TYPE)
E1	1-535-877-22	s	CHIP, CHECKER
FB101	1-414-554-21	s	FERRITE, EMI (SMD) (1608)
FB102	1-414-554-21	s	FERRITE, EMI (SMD) (1608)
FB201	1-414-554-21	s	FERRITE, EMI (SMD) (1608)
FB202	1-414-554-21	s	FERRITE, EMI (SMD) (1608)
IC1	8-759-327-01	s	IC NJM062V(TE2)
IC2	6-704-976-01	s	IC ADR381ARTZ-REEL7
IC101 *1	6-702-621-01	s	IC GS1528-CKAE3
*2	6-709-619-01	s	IC GS1578ACNE3
IC201 *1	6-702-621-01	s	IC GS1528-CKAE3
*2	6-709-619-01	s	IC GS1578ACNE3
L1	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L2	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L101	1-414-457-21	s	INDUCTOR, CHIP (S) 3.3NH
L102	1-414-457-21	s	INDUCTOR, CHIP (S) 3.3NH
L201	1-414-457-21	s	INDUCTOR, CHIP (S) 3.3NH
L202	1-414-457-21	s	INDUCTOR, CHIP (S) 3.3NH
Q1	8-729-209-73	s	TRANSISTOR 2SA1213Y-TE12L
Q2	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q3	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
R1	1-208-871-81	s	RES, CHIP 220 (1005)
R2	1-208-879-81	s	RES, CHIP 470 (1005)
R3	1-208-871-81	s	RES, CHIP 220 (1005)
R4	1-208-907-81	s	RES, CHIP 6.8K (1005)
R5	1-208-871-81	s	RES, CHIP 220 (1005)
R6	1-208-919-81	s	RES, CHIP 22K (1005)

(HIF-26 BOARD suffix 11, 12)

Ref. No. or Q'ty	Part No.	SP	Description
R7	1-208-927-81	s	RES, CHIP 47K (1005)
R8	1-208-927-81	s	RES, CHIP 47K (1005)
R9	1-208-927-81	s	RES, CHIP 47K (1005)
R10	1-208-927-81	s	RES, CHIP 47K (1005)
R11	1-208-863-81	s	RES, CHIP 100 (1005)
R12	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R101	1-208-863-81	s	RES, CHIP 100 (1005)
R102	1-208-856-81	s	RES, CHIP 51 (1005)
R103	1-208-856-81	s	RES, CHIP 51 (1005)
R104	1-208-855-81	s	RES, CHIP 47 (1005)
R105	1-208-935-81	s	RES, CHIP 100K (1005)
R106	1-208-883-81	s	RES, CHIP 680 (1005)
R107	1-208-860-81	s	RES, CHIP 75 (1005)
R108	1-208-860-81	s	RES, CHIP 75 (1005)
R109	1-208-863-81	s	RES, CHIP 100 (1005)
R110	1-208-863-81	s	RES, CHIP 100 (1005)
R113	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R114	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R119	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R120	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R123 *1	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R124 *1	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R201	1-208-856-81	s	RES, CHIP 51 (1005)
R202	1-208-863-81	s	RES, CHIP 100 (1005)
R203	1-208-856-81	s	RES, CHIP 51 (1005)
R204	1-208-855-81	s	RES, CHIP 47 (1005)
R205	1-208-935-81	s	RES, CHIP 100K (1005)
R206	1-208-883-81	s	RES, CHIP 680 (1005)
R207	1-208-860-81	s	RES, CHIP 75 (1005)
R208	1-208-860-81	s	RES, CHIP 75 (1005)
R209	1-208-863-81	s	RES, CHIP 100 (1005)
R210	1-208-863-81	s	RES, CHIP 100 (1005)
R211	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R213	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R217	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R218	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R221 *1	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R222 *1	1-216-864-91	s	CONDUCTOR, CHIP (1608)

HIF-27 BOARD (suffix 11, 12, 31, 32)

---

*1: Board No. suffix 11, 31
*2: Board No. suffix 12, 32

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1129-308-A	s	MOUNTED CIRCUIT BOARD, HIF-27
3pcs	3-364-941-01	s	SCREW (+B) (2.6X5), NYLOK
C1	1-128-589-21	s	CAP, CHIP ELECT 47MF
C2	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C3	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C4	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C6	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C7	1-126-394-21	s	CAP, CHIP ELECT 10MF (4X5.7)
C11	1-128-589-21	s	CAP, CHIP ELECT 47MF
C101	1-100-507-91	s	CAP, CERAMIC 4.7MF C (1608)
C102	1-100-507-91	s	CAP, CERAMIC 4.7MF C (1608)
C103	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C104	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C105	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C106	1-100-507-91	s	CAP, CERAMIC 4.7MF C (1608)
C107	1-100-507-91	s	CAP, CERAMIC 4.7MF C (1608)
C201	1-100-507-91	s	CAP, CERAMIC 4.7MF C (1608)
C202	1-100-507-91	s	CAP, CERAMIC 4.7MF C (1608)
C203	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C204	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C205	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C206	1-100-507-91	s	CAP, CERAMIC 4.7MF C (1608)
C207	1-100-507-91	s	CAP, CERAMIC 4.7MF C (1608)
CN102	1-793-324-11	o	CONNECTOR, COAXIAL (BNC TYPE)
CN103	1-793-324-11	o	CONNECTOR, COAXIAL (BNC TYPE)
CN104	1-793-324-11	o	CONNECTOR, COAXIAL (BNC TYPE)
E1	1-535-877-22	s	CHIP, CHECKER
FB101	1-414-554-21	s	FERRITE, EMI (SMD) (1608)
FB102	1-414-554-21	s	FERRITE, EMI (SMD) (1608)
FB201	1-414-554-21	s	FERRITE, EMI (SMD) (1608)
FB202	1-414-554-21	s	FERRITE, EMI (SMD) (1608)
IC1	8-759-327-01	s	IC NJM062V(TE2)
IC2	6-704-976-01	s	IC ADR381ARTZ-REEL7
IC101 *1	6-702-621-01	s	IC GS1528-CKAE3
*2	6-709-619-01	s	IC GS1578ACNE3
IC201 *1	6-702-621-01	s	IC GS1528-CKAE3
*2	6-709-619-01	s	IC GS1578ACNE3
L1	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L2	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L101	1-414-457-21	s	INDUCTOR, CHIP (S) 3.3NH
L102	1-414-457-21	s	INDUCTOR, CHIP (S) 3.3NH
L201	1-414-457-21	s	INDUCTOR, CHIP (S) 3.3NH
L202	1-414-457-21	s	INDUCTOR, CHIP (S) 3.3NH
Q1	8-729-209-73	s	TRANSISTOR 2SA1213Y-TE12L
Q2	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q3	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
R1	1-208-871-81	s	RES, CHIP 220 (1005)
R2	1-208-879-81	s	RES, CHIP 470 (1005)
R3	1-208-871-81	s	RES, CHIP 220 (1005)
R4	1-208-907-81	s	RES, CHIP 6.8K (1005)
R5	1-208-871-81	s	RES, CHIP 220 (1005)
R6	1-208-919-81	s	RES, CHIP 22K (1005)
R7	1-208-927-81	s	RES, CHIP 47K (1005)

(HIF-27 BOARD suffix 11, 12, 31, 32)

Ref. No. or Q'ty	Part No.	SP	Description
R8	1-208-927-81	s	RES, CHIP 47K (1005)
R9	1-208-927-81	s	RES, CHIP 47K (1005)
R10	1-208-927-81	s	RES, CHIP 47K (1005)
R11	1-208-863-81	s	RES, CHIP 100 (1005)
R12	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R101	1-208-863-81	s	RES, CHIP 100 (1005)
R102	1-208-856-81	s	RES, CHIP 51 (1005)
R103	1-208-856-81	s	RES, CHIP 51 (1005)
R104	1-208-855-81	s	RES, CHIP 47 (1005)
R105	1-208-935-81	s	RES, CHIP 100K (1005)
R106	1-208-883-81	s	RES, CHIP 680 (1005)
R107	1-208-860-81	s	RES, CHIP 75 (1005)
R108	1-208-860-81	s	RES, CHIP 75 (1005)
R109	1-208-863-81	s	RES, CHIP 100 (1005)
R110	1-208-863-81	s	RES, CHIP 100 (1005)
R113	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R114	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R119	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R120	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R123 *1	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R124 *1	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R201	1-208-856-81	s	RES, CHIP 51 (1005)
R202	1-208-863-81	s	RES, CHIP 100 (1005)
R203	1-208-856-81	s	RES, CHIP 51 (1005)
R204	1-208-855-81	s	RES, CHIP 47 (1005)
R205	1-208-935-81	s	RES, CHIP 100K (1005)
R206	1-208-883-81	s	RES, CHIP 680 (1005)
R207	1-208-860-81	s	RES, CHIP 75 (1005)
R208	1-208-860-81	s	RES, CHIP 75 (1005)
R209	1-208-863-81	s	RES, CHIP 100 (1005)
R210	1-208-863-81	s	RES, CHIP 100 (1005)
R211	1-208-860-81	s	RES, CHIP 75 (1005)
R213	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R217	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R218	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R221 *1	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R222 *1	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R225	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R226	1-218-990-81	s	CONDUCTOR, CHIP (1005)

MB-1071A BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1358-339-A	s	MOUNTED CIRCUIT BOARD, MB-1071A
CN31	1-580-547-11	o	PIN, CONNECTOR (PC BOARD) 36P
CN32	1-779-092-11	s	PIN, CONNECTOR (PC BOARD) 10P

```
-------------
MB-1071 BOARD
-------------
 Ref. No.
 or Q'ty  Part No.    SP Description

 1pc      A-1129-220-A s MOUNTED CIRCUIT BOARD, MB-1071

 CN31     1-580-547-11 o PIN, CONNECTOR (PC BOARD) 36P
 CN32     1-779-092-11 s PIN, CONNECTOR (PC BOARD) 10P
```

```
-------------------
MB-1072/1072G BOARD
-------------------
 Ref. No.
 or Q'ty  Part No.    SP Description

 1pc      A-1161-083-A s MOUNTED CIRCUIT BOARD, MB-1072G
                                                  (GOLD)
 1pc      A-1129-279-A s MOUNTED CIRCUIT BOARD, MB-1072
                                               (SILVER)
 1pc      3-990-798-01 s LABEL,SERVICE PARTS-NO

 CN31     1-580-547-11 o PIN, CONNECTOR (PC BOARD) 36P
 CN32     1-778-534-31 s CONNECTOR, FFC/FPC(ZIF) ST 45P
                                                  (GOLD)
          1-778-534-21 o CONNECTOR, FFC (ZIF) 45P
                                               (SILVER)
```

```
------------
PS-778 BOARD
------------
 Ref. No.
 or Q'ty  Part No.    SP Description

 1pc    ⚠ A-1769-657-A s MOUNTED CIRCUIT BOARD, PS-778
 2pcs     1-481-203-11 s BEAD, FERRITE (HF57BB 2.85)
 12pcs    4-382-854-01 s SCREW (M3X8), P, SW (+)
 8.1pcs   7-600-000-48 s ADHESIVE AGENT(SC608LVZ2)180ML

 C101   ⚠ 1-114-597-11 s CAP, PP FILM (ACROSS) 1.0MF
 C102     1-164-227-91 s CAP,CERAMIC 22000PF B 1608
 C103   ⚠ 1-113-912-51 s CAP, CERAMIC 4700PF E
 C104   ⚠ 1-100-915-11 s CAP,METALIZED PE FILM 0.47MF
 C105   ⚠ 1-113-912-51 s CAP, CERAMIC 4700PF E

 C106   ⚠ 1-114-265-11 s CAP, METALIZED POLYESTER FILM
 C107   ⚠ 1-113-912-51 s CAP, CERAMIC 4700PF E
 C108   ⚠ 1-113-912-51 s CAP, CERAMIC 4700PF E
 C109   ⚠ 1-165-529-11 s CAP, PETP FILM (ACROSS) 0.22MF
 C110     1-137-980-91 s CAP,CHIP CERAMIC 0.47MF B 3216

 C111     1-162-966-91 s CAP, CERAMIC 2200PF B 1608
 C112     1-162-966-91 s CAP, CERAMIC 2200PF B 1608
 C113     1-135-960-91 s CAP, CHIP CERAMIC 10MF B(3225)
 C114     1-162-970-91 s CAP, CERAMIC 0.01MF B 1608
 C115     1-162-966-91 s CAP, CERAMIC 2200PF B 1608

 C116     1-164-227-91 s CAP,CERAMIC 22000PF B 1608
 C117     1-125-891-91 s CAP, CHIP CERAMIC0.47MF B 1608
 C118     1-112-686-11 s CAP, CERAMIC 470PF U2J (3216)
 C119     1-112-298-91 o CAP, CERAMIC 1MF B (1608)
 C120     1-112-686-11 s CAP, CERAMIC 470PF U2J (3216)

 C121   ⚠ 1-112-719-11 s CAP, ELECT 150MF
 C122   ⚠ 1-112-719-11 s CAP, ELECT 150MF
 C123     1-100-597-91 s CAP, CHIP CERAMIC 0.1MF B 1608
 C125   ⚠ 1-112-719-11 s CAP, ELECT 150MF
 C126     1-162-970-91 s CAP, CERAMIC 0.01MF B 1608

 C127     1-114-236-21 s CAP, CERAMIC 22MF B (3225)
 C128     1-115-416-91 s CAP,CHIP CERAMIC1000PF CH 1608
 C129     1-114-983-91 s CAP, CHIP CERAMIC 2.2MF B 1608
 C130     1-115-339-91 s CAP, CERAMIC 0.1MF B (2012)
 C131     1-165-947-91 s CAP, CHIP CERAMIC 2.2MF B 3225

 C132     1-164-315-91 s CAP, CERAMIC 470PF CH (1608)
 C133     1-164-315-91 s CAP, CERAMIC 470PF CH (1608)
 C134     1-162-964-91 s CAP,CHIP CERAMIC 1000PF B 1608
 C135     1-162-964-91 s CAP,CHIP CERAMIC 1000PF B 1608
 C136     1-112-687-11 s CAP, CERAMIC 1000PF U2J (3216)

 C137     1-165-954-11 s CAP, METALIZED PP FILM 56000PF
 C139     1-115-416-91 s CAP,CHIP CERAMIC1000PF CH 1608
 C150     1-162-964-91 s CAP,CHIP CERAMIC 1000PF B 1608
 C161     1-162-964-91 s CAP,CHIP CERAMIC 1000PF B 1608
 C162     1-162-964-91 s CAP,CHIP CERAMIC 1000PF B 1608

 C198     1-115-416-91 s CAP,CHIP CERAMIC1000PF CH 1608
 C1001    1-115-416-91 s CAP,CHIP CERAMIC1000PF CH 1608
 C1002    1-107-960-91 s CAP, ELECT 4.7MF
 C1003    1-128-961-31 s CAP, ELECT 220MF
 C1004    1-112-722-21 s CAP, ELECT 470MF

 C1005    1-128-954-31 s CAP, ELECT 1000MF
 C1006    1-114-236-21 s CAP, CERAMIC 22MF B (3225)
 C1007    1-162-966-91 s CAP, CERAMIC 2200PF B 1608
 C1008    1-128-954-31 s CAP, ELECT 1000MF
 C1009    1-162-966-91 s CAP, CERAMIC 2200PF B 1608

 C1010    1-116-381-11 s CAP, CERAMIC X7R 0.47MF
 C1011    1-100-597-91 s CAP, CHIP CERAMIC 0.1MF B 1608
 C1012    1-165-629-91 s CAP, CERAMIC 1000000PF B(3225)
 C1013    1-162-970-91 s CAP, CERAMIC 0.01MF B 1608
 C1014    1-114-917-11 s CAP, ELECT 150MF
```

(PS-778 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1015	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C1016	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C1017	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C1018	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C1019	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C1020	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C1021	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C1024	1-162-964-91	s	CAP,CHIP CERAMIC 1000PF B 1608
C1025	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C1026	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C1027	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C1028	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C1029	1-100-591-91	s	CAP, CHIP CERAMIC 1MF B 2012
C1030	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C1031	1-100-758-21	s	CAP, CHIP CERAMIC 47000PF 3216
C1032	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C1033	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C1034	1-165-585-21	s	CAP, CHIP ELECT 47MF
C1035	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C1037	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C1038	1-114-236-21	s	CAP, CERAMIC 22MF B (3225)
C1039	1-114-236-21	s	CAP, CERAMIC 22MF B (3225)
C1040	1-114-236-21	s	CAP, CERAMIC 22MF B (3225)
C1041	1-114-236-21	s	CAP, CERAMIC 22MF B (3225)
C1042	1-114-236-21	s	CAP, CERAMIC 22MF B (3225)
C1043	1-114-236-21	s	CAP, CERAMIC 22MF B (3225)
C1044	1-114-236-21	s	CAP, CERAMIC 22MF B (3225)
C1045	1-114-236-21	s	CAP, CERAMIC 22MF B (3225)
C1047	1-116-381-11	s	CAP, CERAMIC X7R 0.47MF
C2001	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C2002	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C2003	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C2004	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C2005	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C2006	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C2007	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C2008	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C2009	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C2010	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C2011	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C2023	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C2026	1-114-920-21	s	CAP, CERAMIC 0.47MF X7R (4532)
C2027	1-100-761-21	s	CAP, CHIP CERAMIC 10000PF 2012
C2028	1-100-761-21	s	CAP, CHIP CERAMIC 10000PF 2012
C2029	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C2030	1-100-758-21	s	CAP, CHIP CERAMIC 47000PF 3216
C2031	1-107-960-91	s	CAP, ELECT 4.7MF
C2032	1-100-758-21	s	CAP, CHIP CERAMIC 47000PF 3216
C2033	1-100-758-21	s	CAP, CHIP CERAMIC 47000PF 3216
C2034	1-100-758-21	s	CAP, CHIP CERAMIC 47000PF 3216
C2035	1-100-758-21	s	CAP, CHIP CERAMIC 47000PF 3216
C2036	1-100-758-21	s	CAP, CHIP CERAMIC 47000PF 3216
C2037	1-100-758-21	s	CAP, CHIP CERAMIC 47000PF 3216
C2038	1-100-761-21	s	CAP, CHIP CERAMIC 10000PF 2012
C2039	1-100-758-21	s	CAP, CHIP CERAMIC 47000PF 3216
C2040	1-100-758-21	s	CAP, CHIP CERAMIC 47000PF 3216
CN101	⚠ 1-691-960-11	o	PIN, CONNECTOR (PC BOARD) 3P
CN102	⚠ 1-691-960-11	o	PIN, CONNECTOR (PC BOARD) 3P

(PS-778 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
CN103	⚠ 1-691-960-11	o	PIN, CONNECTOR (PC BOARD) 3P
CN104	1-822-344-11	s	HEADER ASSEMBLY FOR PWB 3P
CN105	⚠ 1-785-706-11	o	PIN, CONNECTOR (PC BOARD) 10P
CN1001	⚠ 1-794-824-11	s	PIN,CONNECTOR(B14B-PASK-1N)14P
CN1002	⚠ 1-818-714-21	s	HEADER ASSEMBLY 20P
CN2002	⚠ 1-691-292-11	o	PIN, CONNECTOR (PC BOARD) 5P
D101	8-719-081-97	s	DIODE MMDL914T1
D102	⚠ 6-500-406-01	s	DIODE D10XB80
D103	⚠ 6-500-839-01	s	DIODE D1UBA80
D104	8-719-081-97	s	DIODE MMDL914T1
D105	8-719-081-97	s	DIODE MMDL914T1
D108	⚠ 8-719-079-02	s	DIODE SF20L60U
D109	8-719-083-67	s	DI UDZSUSTE-1720B
D110	8-719-069-28	s	DI 1SS400FJTE61
D111	8-719-069-28	s	DI 1SS400FJTE61
D112	8-719-081-97	s	DIODE MMDL914T1
D113	8-719-081-97	s	DIODE MMDL914T1
D1001	6-501-068-01	s	DIODE D4SBN20-7001
D1002	6-501-658-01	s	DIODE D1FK60
D1003	6-503-161-01	s	DI FRF10A40-38A
D1004	6-503-162-01	s	DI FCF10A40-38A
D1005	6-503-152-01	s	DI SBR2045CTFP
D1006	6-500-864-01	s	DIODE RB050LA-40TR
D1007	6-500-864-01	s	DIODE RB050LA-40TR
D1008	6-501-658-01	s	DIODE D1FK60
D1009	6-502-642-01	s	DI RF101L4STE25
D1010	8-719-083-82	s	DI UDZSUSTE-1712B
D1013	8-719-069-28	s	DI 1SS400FJTE61
D1014	8-719-069-28	s	DI 1SS400FJTE61
D1015	6-502-642-01	s	DI RF101L4STE25
D1016	8-719-069-57	s	DI UDZSUSTE-176.8B
D1017	6-503-152-01	s	DI SBR2045CTFP
D2001	8-719-083-82	s	DI UDZSUSTE-1712B
D2005	8-719-069-55	s	DI UDZSUSTE-175.6B
D2006	8-719-083-66	s	DI UDZSUSTE-1718B
D2008	6-501-196-01	s	DIODE M1FL40
D2009	8-719-081-97	s	DIODE MMDL914T1
F101	⚠ 1-523-140-11	s	FUSE (TIME-LAG TYPE) 6.3A (6.3A/250V)
IC101	8-753-311-71	s	IC CXA3790M-T6
IC1001	6-711-947-01	s	IC MM1431CURE
IC1002	6-712-159-11	s	IC AD8642ARZ-REEL7
IC1003	6-715-288-01	s	IC MIP2E3DMY0LT
IC1004	6-711-947-01	s	IC MM1431CURE
IC1005	8-759-337-40	s	IC NJM2904V(TE2)
IC1006	8-759-338-95	s	IC NJM2903V(TE2)
IC1007	8-759-337-40	s	IC NJM2904V(TE2)
IC2001	6-711-947-01	s	IC MM1431CURE
IC2002	8-759-338-95	s	IC NJM2903V(TE2)
IC2003	8-759-338-95	s	IC NJM2903V(TE2)
JC2001	1-216-295-91	s	CONDUCTOR, CHIP (2012)
L101	⚠ 1-445-087-11	s	TRANSFORMER, LINE FILTER
L102	⚠ 1-445-086-11	s	TRANSFORMER, LINE FILTER
L103	⚠ 1-481-174-11	s	COIL, CHOKE 95UH
L1001	1-419-718-21	s	COIL, CHOKE 470UH
L1002	1-481-602-11	s	BEAD, AMORPHOUS AB-SN 4X2X6SM

(PS-778 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
L1003	1-481-602-11	s	BEAD, AMORPHOUS AB-SN 4X2X6SM
L1004	1-481-602-11	s	BEAD, AMORPHOUS AB-SN 4X2X6SM
L2001	1-419-589-21	s	COIL, CHOKE (SHIELD TYPE) 10UH
L2002	1-456-174-11	s	COIL, LINE FILTER
PH11 ⚠	8-749-016-82	s	PHOTO COUPLER PC123GY2J00F
PH1001	6-600-477-01	s	IC TLP281(GB-TP,F)
PH1002	6-600-477-01	s	IC TLP281(GB-TP,F)
PH1003	6-600-477-01	s	IC TLP281(GB-TP,F)
PH1004	6-600-477-01	s	IC TLP281(GB-TP,F)
PH2001	6-600-477-01	s	IC TLP281(GB-TP,F)
PH2002	6-600-477-01	s	IC TLP281(GB-TP,F)
PH2003	6-600-477-01	s	IC TLP281(GB-TP,F)
PH2004	6-600-477-01	s	IC TLP281(GB-TP,F)
PH2009	6-600-477-01	s	IC TLP281(GB-TP,F)
Q101	8-729-807-27	s	TRANSISTOR 2SD1621S-TD-E
Q102	8-729-805-35	s	TRANSISTOR 2SB1121-S-TD
Q103 ⚠	6-552-066-01	s	TR SPA17N80C3
Q104	8-729-230-49	s	TRANSISTOR 2SC2712-YG-TE85L
Q105 ⚠	6-552-066-01	s	TR SPA17N80C3
Q106	8-729-807-27	s	TRANSISTOR 2SD1621S-TD-E
Q107	8-729-230-47	s	TRANSISTOR 2SA1162-YG-TE85L
Q108	8-729-230-47	s	TRANSISTOR 2SA1162-YG-TE85L
Q109	8-729-230-49	s	TRANSISTOR 2SC2712-YG-TE85L
Q110	8-729-230-49	s	TRANSISTOR 2SC2712-YG-TE85L
Q111	8-729-230-49	s	TRANSISTOR 2SC2712-YG-TE85L
Q113	8-729-230-49	s	TRANSISTOR 2SC2712-YG-TE85L
Q114	8-729-805-35	s	TRANSISTOR 2SB1121-S-TD
Q115	8-729-805-35	s	TRANSISTOR 2SB1121-S-TD
Q116 ⚠	6-551-297-01	s	TRANSISTOR 2SK3568(LBS1SONY.Q
Q117 ⚠	6-551-297-01	s	TRANSISTOR 2SK3568(LBS1SONY.Q
Q1001	8-729-230-49	s	TRANSISTOR 2SC2712-YG-TE85L
Q2006	8-729-230-49	s	TRANSISTOR 2SC2712-YG-TE85L
Q2007	6-552-067-01	s	TR 2SA2142(TE16L1,NQ)
Q2008	8-729-054-30	s	TRANSISTOR 2SJ585LS-CB11
Q2009	8-729-054-30	s	TRANSISTOR 2SJ585LS-CB11
Q2011	8-729-807-27	s	TRANSISTOR 2SD1621S-TD-E
R101 ⚠	1-219-759-51	s	RESISTOR (SURGE RESISTANT) 1M
R102 ⚠	1-242-949-11	s	RES, INCOMBUSTIBILITY FUSE 0.1
R104	1-208-838-91	s	RES, CHIP 220K (2012)
R105	1-208-838-91	s	RES, CHIP 220K (2012)
R106	1-208-838-91	s	RES, CHIP 220K (2012)
R107	1-208-838-91	s	RES, CHIP 220K (2012)
R108	1-208-838-91	s	RES, CHIP 220K (2012)
R109	1-208-830-91	s	RES, CHIP 100K (2012)
R110	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R111	1-218-879-91	s	RES, CHIP 22K (1608)
R112	1-211-969-91	s	RES, CHIP 10 (1608)
R113	1-216-791-91	s	RES, CHIP 3.3 (1608)
R114	1-211-969-91	s	RES, CHIP 10 (1608)
R115	1-216-791-91	s	RES, CHIP 3.3 (1608)
R116	1-211-977-91	s	RES, CHIP 22 (1608)
R120	1-218-839-91	s	RES, CHIP 470 (1608)
R121	1-218-839-91	s	RES, CHIP 470 (1608)
R122	1-211-977-91	s	RES, CHIP 22 (1608)
R123	1-218-879-91	s	RES, CHIP 22K (1608)
R124	1-218-233-91	s	RES, SQUARE TYPE CHIP 47(4532)
R125	1-218-871-91	s	RES, CHIP 10K (1608)
R126	1-218-879-91	s	RES, CHIP 22K (1608)

(PS-778 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R127	1-218-875-91	s	RES, CHIP 15K (1608)
R128	1-218-875-91	s	RES, CHIP 15K (1608)
R129	1-243-639-11	s	RES, METAL PLATE 0.1
R130	1-218-871-91	s	RES, CHIP 10K (1608)
R131	1-243-639-11	s	RES, METAL PLATE 0.1
R132	1-215-907-51	s	RES, METAL OXIDE FILM 22
R133	1-218-863-91	s	RES, CHIP 4.7K (1608)
R134	1-218-875-91	s	RES, CHIP 15K (1608)
R135	1-218-871-91	s	RES, CHIP 10K (1608)
R136	1-218-871-91	s	RES, CHIP 10K (1608)
R137	1-211-969-91	s	RES, CHIP 10 (1608)
R139	1-208-838-91	s	RES, CHIP 220K (2012)
R140	1-208-838-91	s	RES, CHIP 220K (2012)
R141	1-208-838-91	s	RES, CHIP 220K (2012)
R142	1-208-838-91	s	RES, CHIP 220K (2012)
R143	1-208-838-91	s	RES, CHIP 220K (2012)
R144	1-208-838-91	s	RES, CHIP 220K (2012)
R145	1-208-834-91	s	RES, CHIP 150K (2012)
R146	1-208-822-91	s	RES, CHIP 47K (2012)
R147	1-218-871-91	s	RES, CHIP 10K (1608)
R148	1-211-977-91	s	RES, CHIP 22 (1608)
R149	1-218-867-91	s	RES, CHIP 6.8K (1608)
R152	1-208-838-91	s	RES, CHIP 220K (2012)
R153	1-208-838-91	s	RES, CHIP 220K (2012)
R154	1-208-838-91	s	RES, CHIP 220K (2012)
R155	1-208-838-91	s	RES, CHIP 220K (2012)
R156	1-208-838-91	s	RES, CHIP 220K (2012)
R157	1-208-838-91	s	RES, CHIP 220K (2012)
R158	1-208-834-91	s	RES, CHIP 150K (2012)
R159	1-208-822-91	s	RES, CHIP 47K (2012)
R160	1-218-871-91	s	RES, CHIP 10K (1608)
R161	1-218-823-91	s	RES, CHIP 100 (1608)
R163	1-218-847-91	s	RES, CHIP 1.0K (1608)
R164	1-218-863-91	s	RES, CHIP 4.7K (1608)
R165	1-218-887-91	s	RES, CHIP 47K (1608)
R166	1-218-871-91	s	RES, CHIP 10K (1608)
R167	1-218-887-91	s	RES, CHIP 47K (1608)
R168	1-218-875-91	s	RES, CHIP 15K (1608)
R169	1-218-855-91	s	RES, CHIP 2.2K (1608)
R170	1-218-871-91	s	RES, CHIP 10K (1608)
R171	1-218-875-91	s	RES, CHIP 15K (1608)
R176	1-218-859-91	s	RES, CHIP 3.3K (1608)
R177	1-218-875-91	s	RES, CHIP 15K (1608)
R178	1-211-985-91	s	RES, CHIP 47 (1608)
R179	1-218-875-91	s	RES, CHIP 15K (1608)
R180	1-218-875-91	s	RES, CHIP 15K (1608)
R181	1-218-871-91	s	RES, CHIP 10K (1608)
R182	1-218-855-91	s	RES, CHIP 2.2K (1608)
R183	1-218-855-91	s	RES, CHIP 2.2K (1608)
R184	1-218-875-91	s	RES, CHIP 15K (1608)
R185	1-216-789-91	s	RES, CHIP 2.2 (1608)
R186	1-216-789-91	s	RES, CHIP 2.2 (1608)
R187	1-218-871-91	s	RES, CHIP 10K (1608)
R188	1-218-871-91	s	RES, CHIP 10K (1608)
R189	1-243-639-11	s	RES, METAL PLATE 0.1
R190 ⚠	1-219-759-51	s	RESISTOR (SURGE RESISTANT) 1M
R191	1-218-871-91	s	RES, CHIP 10K (1608)
R192	1-218-831-91	s	RES, CHIP 220 (1608)
R193	1-218-831-91	s	RES, CHIP 220 (1608)

(PS-778 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R194	1-218-879-91	s	RES, CHIP 22K (1608)
R195	1-218-879-91	s	RES, CHIP 22K (1608)
R196	1-218-879-91	s	RES, CHIP 22K (1608)
R197	1-218-871-91	s	RES, CHIP 10K (1608)
R198	1-218-871-91	s	RES, CHIP 10K (1608)
R1001	1-218-887-91	s	RES, CHIP 47K (1608)
R1002	1-218-867-91	s	RES, CHIP 6.8K (1608)
R1003	1-218-871-91	s	RES, CHIP 10K (1608)
R1004	1-218-911-91	s	RES, CHIP 470K (1608)
R1005	1-218-831-91	s	RES, CHIP 220 (1608)
R1007	1-218-847-91	s	RES, CHIP 1.0K (1608)
R1008	1-218-875-91	s	RES, CHIP 15K (1608)
R1009	1-218-863-91	s	RES, CHIP 4.7K (1608)
R1010	1-218-863-91	s	RES, CHIP 4.7K (1608)
R1011	1-218-871-91	s	RES, CHIP 10K (1608)
R1012	1-219-706-21	s	RES, CHIP (SQUARE TYPE) 0.10
R1013	1-219-706-21	s	RES, CHIP (SQUARE TYPE) 0.10
R1014	1-218-839-91	s	RES, CHIP 470 (1608)
R1015	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R1016	1-218-855-91	s	RES, CHIP 2.2K (1608)
R1017	1-218-863-91	s	RES, CHIP 4.7K (1608)
R1018	1-218-855-91	s	RES, CHIP 2.2K (1608)
R1019	1-218-895-91	s	RES, CHIP 100K (1608)
R1021	1-218-871-91	s	RES, CHIP 10K (1608)
R1022	1-218-883-91	s	RES, CHIP 33K (1608)
R1023	1-218-847-91	s	RES, CHIP 1.0K (1608)
R1024	1-218-863-91	s	RES, CHIP 4.7K (1608)
R1027	1-218-863-91	s	RES, CHIP 4.7K (1608)
R1028	1-218-859-91	s	RES, CHIP 3.3K (1608)
R1029	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R1030	1-218-871-91	s	RES, CHIP 10K (1608)
R1031	1-218-871-91	s	RES, CHIP 10K (1608)
R1032	1-218-871-91	s	RES, CHIP 10K (1608)
R1033	1-218-871-91	s	RES, CHIP 10K (1608)
R1034	1-218-867-91	s	RES, CHIP 6.8K (1608)
R1035	1-218-867-91	s	RES, CHIP 6.8K (1608)
R1036	1-218-871-91	s	RES, CHIP 10K (1608)
R1037	1-218-863-91	s	RES, CHIP 4.7K (1608)
R1038	1-218-859-91	s	RES, CHIP 3.3K (1608)
R1039	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R1041	1-218-871-91	s	RES, CHIP 10K (1608)
R1042	1-218-843-91	s	RES, CHIP 680 (1608)
R1043	1-218-875-91	s	RES, CHIP 15K (1608)
R1044	1-218-871-91	s	RES, CHIP 10K (1608)
R1045	1-218-883-91	s	RES, CHIP 33K (1608)
R1047	1-218-871-91	s	RES, CHIP 10K (1608)
R1048	1-218-879-91	s	RES, CHIP 22K (1608)
R1049	1-218-863-91	s	RES, CHIP 4.7K (1608)
R1050	1-218-863-91	s	RES, CHIP 4.7K (1608)
R1051	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R1052	1-218-879-91	s	RES, CHIP 22K (1608)
R1053	1-218-895-91	s	RES, CHIP 100K (1608)
R1054	1-218-871-91	s	RES, CHIP 10K (1608)
R1055	1-218-895-91	s	RES, CHIP 100K (1608)
R1056	1-218-871-91	s	RES, CHIP 10K (1608)
R1057	1-218-883-91	s	RES, CHIP 33K (1608)
R1058	1-218-871-91	s	RES, CHIP 10K (1608)
R1059	1-218-883-91	s	RES, CHIP 33K (1608)
R1060	1-218-871-91	s	RES, CHIP 10K (1608)

(PS-778 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1061	1-218-859-91	s	RES, CHIP 3.3K (1608)
R1062	1-218-859-91	s	RES, CHIP 3.3K (1608)
R1064	1-218-907-91	s	RES, CHIP 330K (1608)
R1066	1-211-985-91	s	RES, CHIP 47 (1608)
R1067	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R2001	1-218-863-91	s	RES, CHIP 4.7K (1608)
R2006	1-244-380-91	s	RES, METAL FILM (CHIP) 4.7K
R2007	1-244-380-91	s	RES, METAL FILM (CHIP) 4.7K
R2008	1-218-883-91	s	RES, CHIP 33K (1608)
R2009	1-218-883-91	s	RES, CHIP 33K (1608)
R2010	1-218-883-91	s	RES, CHIP 33K (1608)
R2011	1-218-883-91	s	RES, CHIP 33K (1608)
R2012	1-218-883-91	s	RES, CHIP 33K (1608)
R2013	1-218-883-91	s	RES, CHIP 33K (1608)
R2014	1-218-867-91	s	RES, CHIP 6.8K (1608)
R2016	1-218-855-91	s	RES, CHIP 2.2K (1608)
R2017	1-218-875-91	s	RES, CHIP 15K (1608)
R2018	1-218-875-91	s	RES, CHIP 15K (1608)
R2019	1-218-875-91	s	RES, CHIP 15K (1608)
R2020	1-218-875-91	s	RES, CHIP 15K (1608)
R2021	1-218-875-91	s	RES, CHIP 15K (1608)
R2022	1-218-843-91	s	RES, CHIP 680 (1608)
R2023	1-218-859-91	s	RES, CHIP 3.3K (1608)
R2024	1-218-895-91	s	RES, CHIP 100K (1608)
R2025	1-218-895-91	s	RES, CHIP 100K (1608)
R2026	1-218-871-91	s	RES, CHIP 10K (1608)
R2027	1-218-871-91	s	RES, CHIP 10K (1608)
R2031	1-218-883-91	s	RES, CHIP 33K (1608)
R2032	1-218-883-91	s	RES, CHIP 33K (1608)
R2033	1-218-883-91	s	RES, CHIP 33K (1608)
R2034	1-218-883-91	s	RES, CHIP 33K (1608)
R2035	1-218-883-91	s	RES, CHIP 33K (1608)
R2036	1-218-883-91	s	RES, CHIP 33K (1608)
R2037	1-218-863-91	s	RES, CHIP 4.7K (1608)
R2038	1-218-835-91	s	RES, CHIP 330 (1608)
R2039	1-218-875-91	s	RES, CHIP 15K (1608)
R2040	1-218-875-91	s	RES, CHIP 15K (1608)
R2041	1-218-875-91	s	RES, CHIP 15K (1608)
R2042	1-218-875-91	s	RES, CHIP 15K (1608)
R2043	1-218-875-91	s	RES, CHIP 15K (1608)
R2044	1-211-969-91	s	RES, CHIP 10 (1608)
R2045	1-218-867-91	s	RES, CHIP 6.8K (1608)
R2048	1-216-857-11	s	RES, CHIP 1M (1608)
R2050	1-218-907-91	s	RES, CHIP 330K (1608)
R2051	1-218-895-91	s	RES, CHIP 100K (1608)
R2052	1-218-871-91	s	RES, CHIP 10K (1608)
R2054	1-218-895-91	s	RES, CHIP 100K (1608)
R2055	1-218-871-91	s	RES, CHIP 10K (1608)
R2056	1-215-927-51	s	RES, METAL OXIDE FILM 47K
R2058	1-215-924-65	s	RES, METAL OXIDE FILM 15K
R2059	1-215-924-65	s	RES, METAL OXIDE FILM 15K
R2105	1-218-883-91	s	RES, CHIP 33K (1608)
R2107	1-218-879-91	s	RES, CHIP 22K (1608)
R2108	1-218-887-91	s	RES, CHIP 47K (1608)
R2109	1-218-887-91	s	RES, CHIP 47K (1608)
R2110	1-218-879-91	s	RES, CHIP 22K (1608)
R2111	1-219-706-21	s	RES, CHIP (SQUARE TYPE) 0.10
R2112	1-219-706-21	s	RES, CHIP (SQUARE TYPE) 0.10
R2113	1-218-831-91	s	RES, CHIP 220 (1608)

(PS-778 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R2114	1-219-611-21	s	RES, CHIP (SQUARE TYPE) 0.047
R2116	1-218-903-91	s	RES, CHIP 220K (1608)
R2119	1-218-823-91	s	RES, CHIP 100 (1608)
R2120	1-218-823-91	s	RES, CHIP 100 (1608)
R2123	1-215-938-35	s	RES, METAL OXIDE FILM 220
R2124	1-218-859-91	s	RES, CHIP 3.3K (1608)
R2125	1-218-859-91	s	RES, CHIP 3.3K (1608)
R2126	1-220-285-91	s	RES,SQUARE TYPE CHIP 10K(3225)
R2127	1-220-293-91	s	RES,SQUARE TYPE CHIP 47K(3225)
R2128	1-220-293-91	s	RES,SQUARE TYPE CHIP 47K(3225)
R2129	1-220-293-91	s	RES,SQUARE TYPE CHIP 47K(3225)
R2130	1-220-285-91	s	RES,SQUARE TYPE CHIP 10K(3225)
R2131	1-220-293-91	s	RES,SQUARE TYPE CHIP 47K(3225)
R2132	1-220-293-91	s	RES,SQUARE TYPE CHIP 47K(3225)
R2133	1-220-293-91	s	RES,SQUARE TYPE CHIP 47K(3225)
R2138	1-244-380-91	s	RES, METAL FILM (CHIP) 4.7K
RY101	⚠ 1-755-488-11	s	RELAY (LKP1AF-18V)
RY2001	⚠ 1-755-022-11	s	RELAY, POWER
T11	⚠ 1-445-855-11	s	TRANSFORMER, CONVERTER
T103	⚠ 1-457-916-11	s	COIL, PFC CHOKE
T104	⚠ 1-445-848-11	s	TRANSFORMER, DRIVE
TH101	⚠ 1-811-125-31	s	THERMISTOR, POWER (16D2-15LCS)
TP103	1-780-318-11	s	TERMINAL, LUG
TP2001	1-780-318-11	s	TERMINAL, LUG
VDR1	⚠ 1-804-996-21	s	VARISTOR

PS-780 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	⚠ A-1769-658-A	s	MOUNTED CIRCUIT BOARD, PS-780
1pc	⚠ 1-576-230-51	s	FUSE (H.B.C.) (3.15A/250V)
1pc	⚠ 1-576-233-51	s	FUSE (H.B.C.) (6.3A/250V)
1pc	⚠ 1-576-300-51	s	FUSE, H.B.C. (8A/250V)
2pcs	4-382-854-01	s	SCREW (M3X8), P, SW (+)
5.7pcs	7-600-000-48	s	ADHESIVE AGENT(SC608LVZ2)180ML
C11	1-113-900-51	s	CAP, CERAMIC 470PF B
C101	⚠ 1-114-594-21	s	CAP, PP FILM (ACROSS) 0.22MF
C102	⚠ 1-113-907-51	s	CAP, CERAMIC 2200PF E
C103	⚠ 1-113-907-51	s	CAP, CERAMIC 2200PF E
C104	⚠ 1-113-912-51	s	CAP, CERAMIC 4700PF E
C105	⚠ 1-113-912-51	s	CAP, CERAMIC 4700PF E
C106	⚠ 1-114-594-21	s	CAP, PP FILM (ACROSS) 0.22MF
C109	⚠ 1-100-915-11	s	CAP,METALIZED PE FILM 0.47MF
C110	⚠ 1-112-912-11	s	CAP, ELECT 10MF
C111	⚠ 1-114-921-21	s	CAP, CERAMIC 0.22MF X7R (5750)
C113	⚠ 1-114-265-11	s	CAP, METALIZED POLYESTER FILM
C114	1-165-947-91	s	CAP, CHIP CERAMIC 2.2MF B 3225
C115	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C116	1-112-679-21	s	CAP,CERAMIC 2200PF B (3216)
C117	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C119	1-112-800-11	s	CAP, ELECT 100MF
C120	1-112-798-11	s	CAP, ELECT 10MF
C122	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C1001	1-114-499-11	s	CAP, ELECT 47MF
C1002	1-114-499-11	s	CAP, ELECT 47MF
C1003	1-112-801-11	s	CAP, ELECT 220MF
C1004	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C1005	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C1006	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C1007	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C1008	1-162-966-91	s	CAP, CERAMIC 2200PF B 1608
C1009	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C1010	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C1011	1-100-864-11	s	CAP, FILM 1.0MF
C1012	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C1013	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C1014	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C1016	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C1017	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C1018	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C1019	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C1020	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C1021	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C1023	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C1024	1-115-165-11	s	CAP, FILM (ACROSS) 0.1MF
C1025	1-115-164-11	s	CAP, FILM (ACROSS) 0.047MF
C1026	1-115-164-11	s	CAP, FILM (ACROSS) 0.047MF
C1028	1-115-164-11	s	CAP, FILM (ACROSS) 0.047MF
C1029	1-115-164-11	s	CAP, FILM (ACROSS) 0.047MF
C1030	1-100-863-11	s	CAP, FILM 0.47MF
C1031	1-100-915-11	s	CAP,METALIZED PE FILM 0.47MF
C1032	1-165-733-31	s	CAP, ELECT 100MF 105
C1033	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C1034	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C3009	1-116-381-11	s	CAP, CERAMIC X7R 0.47MF
C3010	1-116-381-11	s	CAP, CERAMIC X7R 0.47MF
C3011	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C3012	1-165-629-91	s	CAP, CERAMIC 1000000PF B(3225)
C3013	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608

(PS-780 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C3014	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C3015	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C3016	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C3017	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C3018	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C3019	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C3020	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C3021	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C3022	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C3023	1-100-591-91	s	CAP, CHIP CERAMIC 1MF B 2012
C3024	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C3026	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C3027	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C3031	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C3032	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C3033	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C3034	1-165-585-21	s	CAP, CHIP ELECT 47MF
C3035	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C3037	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C3054	1-114-917-11	s	CAP, ELECT 150MF
C3081	1-100-758-21	s	CAP, CHIP CERAMIC 47000PF 3216
C3089	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C3090	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C5015	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
CN101	⚠ 1-785-705-11	s	PIN, CONNECTOR (PC BOARD) 9P
CN102	⚠ 1-691-960-11	o	PIN, CONNECTOR (PC BOARD) 3P
CN103	⚠ 1-691-960-11	o	PIN, CONNECTOR (PC BOARD) 3P
CN104	⚠ 1-691-960-11	o	PIN, CONNECTOR (PC BOARD) 3P
CN105	⚠ 1-766-177-11	o	PIN, CONNECTOR (PC BOARD) 9P
CN106	⚠ 1-691-960-11	o	PIN, CONNECTOR (PC BOARD) 3P
CN1002	1-766-176-11	o	PIN, CONNECTOR (PC BOARD) 6P
CN1003	1-818-714-21	s	HEADER ASSEMBLY 20P
CN1005	1-691-291-11	o	PIN, CONNECTOR (PC BOARD) 5P
CN3001	1-691-960-11	o	PIN, CONNECTOR (PC BOARD) 3P
D101	⚠ 6-500-839-01	s	DIODE D1UBA80
D102	8-719-081-97	s	DIODE MMDL914T1
D103	⚠ 6-500-406-01	s	DIODE D10XB80
D104	8-719-069-28	s	DI 1SS400FJTE61
D105	8-719-069-55	s	DI UDZSUSTE-175.6B
D106	6-501-658-01	s	DIODE D1FK60
D107	8-719-066-92	s	DIODE D1FL20U-TA
D108	8-719-066-92	s	DIODE D1FL20U-TA
D109	8-719-083-85	s	DI UDZSUSTE-1722B
D1001	8-719-066-92	s	DIODE D1FL20U-TA
D1002	8-719-027-63	s	DIODE D2FL20U-TA
D1003	8-719-066-92	s	DIODE D1FL20U-TA
D1004	6-500-839-01	s	DIODE D1UBA80
D1005	8-719-081-97	s	DIODE MMDL914T1
D1006	8-719-056-48	s	DIODE 1SS388(TPL3)
D1007	8-719-081-97	s	DIODE MMDL914T1
D3001	6-501-658-01	s	DIODE D1FK60
D3007	6-501-196-01	s	DIODE M1FL40
D3008	6-501-196-01	s	DIODE M1FL40
D3009	6-502-642-01	s	DI RF101L4STE25
D3010	8-719-083-82	s	DI UDZSUSTE-1712B
D3013	8-719-069-28	s	DI 1SS400FJTE61
D3014	8-719-069-28	s	DI 1SS400FJTE61
D3015	6-502-642-01	s	DI RF101L4STE25
D3016	8-719-069-57	s	DI UDZSUSTE-176.8B

(PS-780 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
D3017	6-501-196-01	s	DIODE M1FL40
F101	⚠ 1-523-152-11	s	HOLDER, FUSE (10A/250V)
F102	⚠ 1-523-152-11	s	HOLDER, FUSE (10A/250V)
IC101	⚠ 6-713-051-01	s	IC STR-A6153E
IC1001	6-711-947-01	s	IC MM1431CURE
IC1002	8-759-338-95	s	IC NJM2903V(TE2)
IC1003	6-711-947-01	s	IC MM1431CURE
IC1004	6-711-947-01	s	IC MM1431CURE
IC1005	8-759-338-95	s	IC NJM2903V(TE2)
IC3001	6-712-159-11	s	IC AD8642ARZ-REEL7
IC3002	8-759-337-40	s	IC NJM2904V(TE2)
IC3003	6-715-288-01	s	IC MIP2E3DMY0LT
IC3004	6-711-947-01	s	IC MM1431CURE
IC3005	6-711-947-01	s	IC MM1431CURE
IC3006	8-759-338-95	s	IC NJM2903V(TE2)
IC3007	8-759-338-95	s	IC NJM2903V(TE2)
IC3008	8-759-337-40	s	IC NJM2904V(TE2)
L101	⚠ 1-406-749-11	s	COIL, CHOKE 100
L1001	1-409-721-11	s	COIL, CHOKE 42UH
L1002	1-409-721-11	s	COIL, CHOKE 42UH
L1003	1-409-721-11	s	COIL, CHOKE 42UH
L1004	1-409-721-11	s	COIL, CHOKE 42UH
L1005	1-481-603-11	s	BEAD, AMORPHOUS AB-SN 3X2X3SM
L3001	1-419-718-21	s	COIL, CHOKE 470UH
PH11	⚠ 8-749-016-82	s	PHOTO COUPLER PC123GY2J00F
PH12	⚠ 8-749-016-82	s	PHOTO COUPLER PC123GY2J00F
PH1001	6-600-477-01	s	IC TLP281(GB-TP,F)
PH3001	6-600-477-01	s	IC TLP281(GB-TP,F)
PH3002	6-600-477-01	s	IC TLP281(GB-TP,F)
PH3003	6-600-477-01	s	IC TLP281(GB-TP,F)
PH3005	6-600-477-01	s	IC TLP281(GB-TP,F)
PH3012	6-600-477-01	s	IC TLP281(GB-TP,F)
Q101	8-729-807-27	s	TRANSISTOR 2SD1621S-TD-E
Q1001	8-729-807-27	s	TRANSISTOR 2SD1621S-TD-E
Q1002	8-729-807-27	s	TRANSISTOR 2SD1621S-TD-E
Q3001	8-729-230-49	s	TRANSISTOR 2SC2712-YG-TE85L
R101	⚠ 1-219-759-51	s	RESISTOR (SURGE RESISTANT) 1M
R104	1-208-838-91	s	RES, CHIP 220K (2012)
R105	1-208-838-91	s	RES, CHIP 220K (2012)
R106	1-208-838-91	s	RES, CHIP 220K (2012)
R107	1-208-838-91	s	RES, CHIP 220K (2012)
R108	1-208-838-91	s	RES, CHIP 220K (2012)
R109	1-208-830-91	s	RES, CHIP 100K (2012)
R110	1-208-818-91	s	RES, CHIP 33K (2012)
R111	1-218-879-91	s	RES, CHIP 22K (1608)
R112	⚠ 1-246-155-21	s	RES, NONFLAMMABLE FUSE 1.0
R119	1-211-969-91	s	RES, CHIP 10 (1608)
R120	1-220-305-91	o	RES,SQUARE TYPE CHIP 22K(4532)
R121	1-220-305-91	o	RES,SQUARE TYPE CHIP 22K(4532)
R122	1-220-149-91	s	RES,SQUARE TYPE CHIP 2.2(4532)
R123	1-220-149-91	s	RES,SQUARE TYPE CHIP 2.2(4532)
R126	1-211-981-91	s	RES, CHIP 33 (1608)
R127	1-218-871-91	s	RES, CHIP 10K (1608)
R128	1-218-871-91	s	RES, CHIP 10K (1608)
R129	1-220-230-91	s	RES,SQUARE TYPE CHIP 2.2(3225)
R131	1-218-875-91	s	RES, CHIP 15K (1608)

(PS-780 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1001	1-218-895-91	s	RES, CHIP 100K (1608)
R1002	1-218-863-91	s	RES, CHIP 4.7K (1608)
R1003	1-218-883-91	s	RES, CHIP 33K (1608)
R1005	1-218-875-91	s	RES, CHIP 15K (1608)
R1006	1-218-875-91	s	RES, CHIP 15K (1608)
R1007	1-218-875-91	s	RES, CHIP 15K (1608)
R1008	1-218-871-91	s	RES, CHIP 10K (1608)
R1009	1-218-871-91	s	RES, CHIP 10K (1608)
R1010	1-218-867-91	s	RES, CHIP 6.8K (1608)
R1011	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R1012	1-218-883-91	s	RES, CHIP 33K (1608)
R1013	1-218-863-91	s	RES, CHIP 4.7K (1608)
R1015	1-216-365-51	s	RES, METAL OXIDE FILM 0.47
R1016	1-216-365-51	s	RES, METAL OXIDE FILM 0.47
R1017	1-218-863-91	s	RES, CHIP 4.7K (1608)
R1018	1-218-863-91	s	RES, CHIP 4.7K (1608)
R1019	1-220-293-91	s	RES,SQUARE TYPE CHIP 47K(3225)
R1020	1-218-859-91	s	RES, CHIP 3.3K (1608)
R1025	1-220-293-91	s	RES,SQUARE TYPE CHIP 47K(3225)
R1028	1-218-859-91	s	RES, CHIP 3.3K (1608)
R1029	1-220-293-91	s	RES,SQUARE TYPE CHIP 47K(3225)
R1030	1-218-871-91	s	RES, CHIP 10K (1608)
R1031	1-218-871-91	s	RES, CHIP 10K (1608)
R1033	1-215-890-51	s	RES, METAL OXIDE FILM 470
R1035	1-218-851-91	s	RES, CHIP 1.5K (1608)
R1036	1-218-851-91	s	RES, CHIP 1.5K (1608)
R1037	1-218-847-91	s	RES, CHIP 1.0K (1608)
R1039	1-218-847-91	s	RES, CHIP 1.0K (1608)
R1040	1-218-847-91	s	RES, CHIP 1.0K (1608)
R1041	1-218-879-91	s	RES, CHIP 22K (1608)
R1042	1-218-859-91	s	RES, CHIP 3.3K (1608)
R1043	1-218-859-91	s	RES, CHIP 3.3K (1608)
R1044	1-220-221-91	s	RES,SQUARE TYPE CHIP 100(4532)
R1045	1-220-221-91	s	RES,SQUARE TYPE CHIP 100(4532)
R1046	1-220-221-91	s	RES,SQUARE TYPE CHIP 100(4532)
R1047	1-218-871-91	s	RES, CHIP 10K (1608)
R1048	1-218-871-91	s	RES, CHIP 10K (1608)
R1050	1-218-863-91	s	RES, CHIP 4.7K (1608)
R1051	1-218-835-91	s	RES, CHIP 330 (1608)
R1052	1-218-855-91	s	RES, CHIP 2.2K (1608)
R1053	1-218-839-91	s	RES, CHIP 470 (1608)
R1055	1-218-879-91	s	RES, CHIP 22K (1608)
R1056	1-220-285-91	s	RES,SQUARE TYPE CHIP 10K(3225)
R1057	1-220-293-91	s	RES,SQUARE TYPE CHIP 47K(3225)
R1058	1-220-293-91	s	RES,SQUARE TYPE CHIP 47K(3225)
R1059	1-220-293-91	s	RES,SQUARE TYPE CHIP 47K(3225)
R1060	1-220-285-91	s	RES,SQUARE TYPE CHIP 10K(3225)
R1061	1-220-293-91	s	RES,SQUARE TYPE CHIP 47K(3225)
R1062	1-220-293-91	s	RES,SQUARE TYPE CHIP 47K(3225)
R1063	1-220-293-91	s	RES,SQUARE TYPE CHIP 47K(3225)
R1065	1-218-871-91	s	RES, CHIP 10K (1608)
R1066	1-218-895-91	s	RES, CHIP 100K (1608)
R1067	1-218-855-91	s	RES, CHIP 2.2K (1608)
R1068	1-215-890-51	s	RES, METAL OXIDE FILM 470
R1069	1-215-890-51	s	RES, METAL OXIDE FILM 470
R1070	1-216-365-51	s	RES, METAL OXIDE FILM 0.47
R1071	1-220-238-91	s	RES, SQUARE TYPE CHIP 10(3225)
R1072	1-220-238-91	s	RES, SQUARE TYPE CHIP 10(3225)
R1073	1-218-895-91	s	RES, CHIP 100K (1608)

(PS-780 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R3001	1-218-859-91	s	RES, CHIP 3.3K (1608)
R3002	1-218-859-91	s	RES, CHIP 3.3K (1608)
R3009	1-218-883-91	s	RES, CHIP 33K (1608)
R3012	1-219-706-21	s	RES, CHIP (SQUARE TYPE) 0.10
R3013	1-219-706-21	s	RES, CHIP (SQUARE TYPE) 0.10
R3014	1-218-839-91	s	RES, CHIP 470 (1608)
R3015	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R3016	1-218-855-91	s	RES, CHIP 2.2K (1608)
R3017	1-218-863-91	s	RES, CHIP 4.7K (1608)
R3019	1-218-895-91	s	RES, CHIP 100K (1608)
R3021	1-218-871-91	s	RES, CHIP 10K (1608)
R3022	1-218-883-91	s	RES, CHIP 33K (1608)
R3023	1-218-847-91	s	RES, CHIP 1.0K (1608)
R3024	1-218-863-91	s	RES, CHIP 4.7K (1608)
R3026	1-218-859-91	s	RES, CHIP 3.3K (1608)
R3027	1-218-863-91	s	RES, CHIP 4.7K (1608)
R3028	1-218-863-91	s	RES, CHIP 4.7K (1608)
R3029	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R3030	1-218-871-91	s	RES, CHIP 10K (1608)
R3031	1-218-871-91	s	RES, CHIP 10K (1608)
R3032	1-218-875-91	s	RES, CHIP 15K (1608)
R3033	1-218-875-91	s	RES, CHIP 15K (1608)
R3034	1-218-875-91	s	RES, CHIP 15K (1608)
R3035	1-218-875-91	s	RES, CHIP 15K (1608)
R3036	1-218-875-91	s	RES, CHIP 15K (1608)
R3037	1-218-843-91	s	RES, CHIP 680 (1608)
R3038	1-218-859-91	s	RES, CHIP 3.3K (1608)
R3039	1-218-895-91	s	RES, CHIP 100K (1608)
R3040	1-218-871-91	s	RES, CHIP 10K (1608)
R3041	1-218-875-91	s	RES, CHIP 15K (1608)
R3042	1-218-875-91	s	RES, CHIP 15K (1608)
R3043	1-218-875-91	s	RES, CHIP 15K (1608)
R3044	1-218-875-91	s	RES, CHIP 15K (1608)
R3045	1-218-875-91	s	RES, CHIP 15K (1608)
R3046	1-211-969-91	s	RES, CHIP 10 (1608)
R3047	1-218-867-91	s	RES, CHIP 6.8K (1608)
R3048	1-218-907-91	s	RES, CHIP 330K (1608)
R3050	1-218-895-91	s	RES, CHIP 100K (1608)
R3051	1-218-871-91	s	RES, CHIP 10K (1608)
R3055	1-215-899-51	s	RES, METAL OXIDE FILM 15K
R3057	1-215-899-51	s	RES, METAL OXIDE FILM 15K
R3058	1-218-871-91	s	RES, CHIP 10K (1608)
R3059	1-218-871-91	s	RES, CHIP 10K (1608)
R3060	1-218-871-91	s	RES, CHIP 10K (1608)
R3061	1-218-879-91	s	RES, CHIP 22K (1608)
R3062	1-218-863-91	s	RES, CHIP 4.7K (1608)
R3063	1-218-859-91	s	RES, CHIP 3.3K (1608)
R3064	1-218-847-91	s	RES, CHIP 1.0K (1608)
R3065	1-218-879-91	s	RES, CHIP 22K (1608)
R3066	1-211-985-91	s	RES, CHIP 47 (1608)
R3067	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R3072	1-218-871-91	s	RES, CHIP 10K (1608)
R3073	1-218-871-91	s	RES, CHIP 10K (1608)
R3074	1-218-867-91	s	RES, CHIP 6.8K (1608)
R3075	1-218-867-91	s	RES, CHIP 6.8K (1608)
R3076	1-218-895-91	s	RES, CHIP 100K (1608)
R3077	1-218-871-91	s	RES, CHIP 10K (1608)
R3078	1-218-859-91	s	RES, CHIP 3.3K (1608)
R3079	1-216-864-91	s	CONDUCTOR, CHIP (1608)

(PS-780 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R3080	1-218-871-91	s	RES, CHIP 10K (1608)
R3084	1-218-907-91	s	RES, CHIP 330K (1608)
R3085	1-218-883-91	s	RES, CHIP 33K (1608)
R3086	1-218-871-91	s	RES, CHIP 10K (1608)
R3087	1-218-883-91	s	RES, CHIP 33K (1608)
R3088	1-218-855-91	s	RES, CHIP 2.2K (1608)
R3097	1-218-863-91	s	RES, CHIP 4.7K (1608)
RY101	⚠ 1-755-488-11	s	RELAY (LKP1AF-18V)
RY1001	⚠ 1-755-022-11	s	RELAY, POWER
RY1002	⚠ 1-755-022-11	s	RELAY, POWER
S101	⚠ 1-798-301-11	s	SWITCH, VOLTAGE SELECTION
S102	⚠ 1-798-301-11	s	SWITCH, VOLTAGE SELECTION
T11	⚠ 1-445-786-11	s	TRANSFORMER, CONVERTER (STBY)
T101	⚠ 1-456-562-11	s	LINE FILTER COIL
TH101	⚠ 1-811-125-31	s	THERMISTOR, POWER (16D2-15LCS)
TH3001	1-811-125-41	s	THERMISTOR, POWER (16D2-15LD)
TP101	1-780-318-11	s	TERMINAL, LUG
VDR1	⚠ 1-804-996-21	s	VARISTOR

PS-781 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	⚠ A-1769-659-A	s	MOUNTED CIRCUIT BOARD, PS-781
1pc	1-481-203-11	s	BEAD, FERRITE (HF57BB 2.85)
1pc	⚠ 1-523-151-11	s	THERMOSTAT (EP223) (13A/26V)
7pcs	4-382-854-01	s	SCREW (M3X8), P, SW (+)
1pc	4-382-854-51	s	SCREW (M3X6), P, SW (+)
3.25pcs	7-600-000-48	s	ADHESIVE AGENT(SC608LVZ2)180ML
C401	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C402	1-137-980-91	s	CAP,CHIP CERAMIC 0.47MF B 3216
C403	1-162-966-91	s	CAP, CERAMIC 2200PF B 1608
C404	1-162-966-91	s	CAP, CERAMIC 2200PF B 1608
C405	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C406	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C407	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C408	1-164-227-91	s	CAP,CERAMIC 22000PF B 1608
C409	1-125-891-91	s	CAP, CHIP CERAMIC0.47MF B 1608
C410	1-112-686-11	s	CAP, CERAMIC 470PF U2J (3216)
C411	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C412	1-112-686-11	s	CAP, CERAMIC 470PF U2J (3216)
C413	1-162-964-91	s	CAP,CHIP CERAMIC 1000PF B 1608
C414	⚠ 1-116-445-11	s	CAP, ELECT 100MF
C415	⚠ 1-116-445-11	s	CAP, ELECT 100MF
C416	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C418	1-114-236-21	s	CAP, CERAMIC 22MF B (3225)
C419	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C420	1-162-964-91	s	CAP,CHIP CERAMIC 1000PF B 1608
C421	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C422	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C423	1-162-964-91	s	CAP,CHIP CERAMIC 1000PF B 1608
C424	1-164-315-91	s	CAP, CERAMIC 470PF CH (1608)
C425	1-164-315-91	s	CAP, CERAMIC 470PF CH (1608)
C426	1-162-964-91	s	CAP,CHIP CERAMIC 1000PF B 1608
C427	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C428	1-165-947-91	s	CAP, CHIP CERAMIC 2.2MF B 3225
C429	1-162-964-91	s	CAP,CHIP CERAMIC 1000PF B 1608
C430	1-162-964-91	s	CAP,CHIP CERAMIC 1000PF B 1608
C431	1-112-687-11	s	CAP, CERAMIC 1000PF U2J (3216)
C432	1-165-953-91	s	CAP, METALIZED PP FILM 47000PF
C433	1-164-227-91	s	CAP,CERAMIC 22000PF B 1608
C434	1-162-964-91	s	CAP,CHIP CERAMIC 1000PF B 1608
C497	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C4001	1-162-964-91	s	CAP,CHIP CERAMIC 1000PF B 1608
C4002	1-107-960-91	s	CAP, ELECT 4.7MF
C4003	1-128-961-31	s	CAP, ELECT 220MF
C4004	1-112-912-11	s	CAP, ELECT 10MF
C4005	1-112-912-11	s	CAP, ELECT 10MF
C4006	1-128-954-31	s	CAP, ELECT 1000MF
C4007	1-114-236-21	s	CAP, CERAMIC 22MF B (3225)
C4008	1-162-966-91	s	CAP, CERAMIC 2200PF B 1608
C4009	1-128-954-31	s	CAP, ELECT 1000MF
C4010	1-162-966-91	s	CAP, CERAMIC 2200PF B 1608
C4011	1-114-236-21	s	CAP, CERAMIC 22MF B (3225)
C4012	1-114-236-21	s	CAP, CERAMIC 22MF B (3225)
CN401	⚠ 1-785-705-11	s	PIN, CONNECTOR (PC BOARD) 9P
CN402	1-691-960-11	o	PIN, CONNECTOR (PC BOARD) 3P
CN403	1-822-344-11	s	HEADER ASSEMBLY FOR PWB 3P
CN404	⚠ 1-819-475-11	o	HEADER ASSEMBLY FOR PWB 7P
CN4001	1-691-960-11	o	PIN, CONNECTOR (PC BOARD) 3P

(PS-781 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
CN4002 ⚠	1-794-824-11	s	PIN,CONNECTOR(B14B-PASK-1N)14P
D403	8-719-081-97	s	DIODE MMDL914T1
D406 ⚠	8-719-079-02	s	DIODE SF20L60U
D408	8-719-083-67	s	DI UDZSUSTE-1720B
D409	8-719-069-28	s	DI 1SS400FJTE61
D410	8-719-069-28	s	DI 1SS400FJTE61
D411	8-719-081-97	s	DIODE MMDL914T1
D412	8-719-081-97	s	DIODE MMDL914T1
D4001	6-501-068-01	s	DIODE D4SBN20-7001
D4002	6-501-658-01	s	DIODE D1FK60
D4003	6-503-161-01	s	DI FRF10A40-38A
D4004	6-503-162-01	s	DI FCF10A40-38A
D4005	6-503-152-01	s	DI SBR2045CTFP
D4006	6-500-864-01	s	DIODE RB050LA-40TR
D4007	6-500-864-01	s	DIODE RB050LA-40TR
D4008	6-503-152-01	s	DI SBR2045CTFP
IC401	8-753-311-71	s	IC CXA3790M-T6
IC4001	6-711-947-01	s	IC MM1431CURE
L4001	1-481-602-11	s	BEAD, AMORPHOUS AB-SN 4X2X6SM
L4002	1-481-602-11	s	BEAD, AMORPHOUS AB-SN 4X2X6SM
L4003	1-481-602-11	s	BEAD, AMORPHOUS AB-SN 4X2X6SM
PH41 ⚠	8-749-016-82	s	PHOTO COUPLER PC123GY2J00F
Q401	8-729-807-27	s	TRANSISTOR 2SD1621S-TD-E
Q402	8-729-805-35	s	TRANSISTOR 2SB1121-S-TD
Q404 ⚠	6-552-066-01	s	TR SPA17N80C3
Q406	8-729-230-49	s	TRANSISTOR 2SC2712-YG-TE85L
Q407	8-729-230-47	s	TRANSISTOR 2SA1162-YG-TE85L
Q408	8-729-230-49	s	TRANSISTOR 2SC2712-YG-TE85L
Q409	8-729-230-47	s	TRANSISTOR 2SA1162-YG-TE85L
Q410	8-729-230-49	s	TRANSISTOR 2SC2712-YG-TE85L
Q411	8-729-230-49	s	TRANSISTOR 2SC2712-YG-TE85L
Q412	8-729-805-35	s	TRANSISTOR 2SB1121-S-TD
Q413	8-729-805-35	s	TRANSISTOR 2SB1121-S-TD
Q414	8-729-230-49	s	TRANSISTOR 2SC2712-YG-TE85L
Q415	8-729-230-49	s	TRANSISTOR 2SC2712-YG-TE85L
Q416 ⚠	6-551-297-01	s	TRANSISTOR 2SK3568(LBS1SONY.Q
Q417 ⚠	6-551-297-01	s	TRANSISTOR 2SK3568(LBS1SONY.Q
R403	1-211-969-91	s	RES, CHIP 10 (1608)
R404	1-216-791-91	s	RES, CHIP 3.3 (1608)
R405	1-211-977-91	s	RES, CHIP 22 (1608)
R406	1-218-875-91	s	RES, CHIP 15K (1608)
R407 ⚠	1-242-949-11	s	RES, INCOMBUSTIBILITY FUSE 0.1
R408	1-218-875-91	s	RES, CHIP 15K (1608)
R409	1-218-839-91	s	RES, CHIP 470 (1608)
R410	1-218-839-91	s	RES, CHIP 470 (1608)
R411	1-211-977-91	s	RES, CHIP 22 (1608)
R412	1-218-879-91	s	RES, CHIP 22K (1608)
R413	1-218-233-91	s	RES, SQUARE TYPE CHIP 47(4532)
R414	1-218-871-91	s	RES, CHIP 10K (1608)
R415	1-218-879-91	s	RES, CHIP 22K (1608)
R416	1-218-859-91	s	RES, CHIP 3.3K (1608)
R417	1-243-639-11	s	RES, METAL PLATE 0.1
R418	1-218-871-91	s	RES, CHIP 10K (1608)
R419	1-218-871-91	s	RES, CHIP 10K (1608)
R420	1-215-907-51	s	RES, METAL OXIDE FILM 22
R421	1-216-829-91	s	RES, CHIP 4.7K (1608)
R422	1-218-875-91	s	RES, CHIP 15K (1608)

(PS-781 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R423	1-211-969-91	s	RES, CHIP 10 (1608)
R424	1-211-985-91	s	RES, CHIP 47 (1608)
R425	1-218-867-91	s	RES, CHIP 6.8K (1608)
R427	1-218-823-91	s	RES, CHIP 100 (1608)
R429	1-208-838-91	s	RES, CHIP 220K (2012)
R430	1-208-838-91	s	RES, CHIP 220K (2012)
R431	1-208-838-91	s	RES, CHIP 220K (2012)
R432	1-208-838-91	s	RES, CHIP 220K (2012)
R433	1-208-838-91	s	RES, CHIP 220K (2012)
R434	1-208-838-91	s	RES, CHIP 220K (2012)
R435	1-208-834-91	s	RES, CHIP 150K (2012)
R436	1-208-822-91	s	RES, CHIP 47K (2012)
R437	1-218-871-91	s	RES, CHIP 10K (1608)
R438	1-218-875-91	s	RES, CHIP 15K (1608)
R440	1-208-838-91	s	RES, CHIP 220K (2012)
R441	1-208-838-91	s	RES, CHIP 220K (2012)
R442	1-208-838-91	s	RES, CHIP 220K (2012)
R443	1-208-838-91	s	RES, CHIP 220K (2012)
R444	1-208-838-91	s	RES, CHIP 220K (2012)
R445	1-208-838-91	s	RES, CHIP 220K (2012)
R446	1-208-834-91	s	RES, CHIP 150K (2012)
R447	1-208-822-91	s	RES, CHIP 47K (2012)
R448	1-218-871-91	s	RES, CHIP 10K (1608)
R449	1-218-875-91	s	RES, CHIP 15K (1608)
R451	1-218-887-91	s	RES, CHIP 47K (1608)
R452	1-218-871-91	s	RES, CHIP 10K (1608)
R453	1-218-887-91	s	RES, CHIP 47K (1608)
R454	1-218-875-91	s	RES, CHIP 15K (1608)
R456	1-218-847-91	s	RES, CHIP 1.0K (1608)
R457	1-218-871-91	s	RES, CHIP 10K (1608)
R458	1-218-875-91	s	RES, CHIP 15K (1608)
R462	1-218-863-91	s	RES, CHIP 4.7K (1608)
R463	1-211-985-91	s	RES, CHIP 47 (1608)
R464	1-218-855-91	s	RES, CHIP 2.2K (1608)
R465	1-218-875-91	s	RES, CHIP 15K (1608)
R466	1-218-875-91	s	RES, CHIP 15K (1608)
R467	1-218-855-91	s	RES, CHIP 2.2K (1608)
R468	1-218-855-91	s	RES, CHIP 2.2K (1608)
R469	1-218-875-91	s	RES, CHIP 15K (1608)
R470	1-218-871-91	s	RES, CHIP 10K (1608)
R471	1-218-875-91	s	RES, CHIP 15K (1608)
R472	1-216-789-91	s	RES, CHIP 2.2 (1608)
R473	1-216-789-91	s	RES, CHIP 2.2 (1608)
R474	1-218-871-91	s	RES, CHIP 10K (1608)
R475	1-218-871-91	s	RES, CHIP 10K (1608)
R476	1-243-639-11	s	RES, METAL PLATE 0.1
R477	1-218-831-91	s	RES, CHIP 220 (1608)
R478	1-218-831-91	s	RES, CHIP 220 (1608)
R479	1-218-879-91	s	RES, CHIP 22K (1608)
R480	1-218-879-91	s	RES, CHIP 22K (1608)
R481	1-218-879-91	s	RES, CHIP 22K (1608)
R498	1-218-871-91	s	RES, CHIP 10K (1608)
R4001	1-218-887-91	s	RES, CHIP 47K (1608)
R4002	1-218-867-91	s	RES, CHIP 6.8K (1608)
R4003	1-218-871-91	s	RES, CHIP 10K (1608)
R4004	1-218-911-91	s	RES, CHIP 470K (1608)
R4005	1-218-831-91	s	RES, CHIP 220 (1608)
R4006	1-220-277-91	s	RES,SQUARE TYPE CHIP 2.2K 3225
R4007	1-220-277-91	s	RES,SQUARE TYPE CHIP 2.2K 3225

(PS-781 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R4008	1-218-847-91	s	RES, CHIP 1.0K (1608)
R4009	1-218-875-91	s	RES, CHIP 15K (1608)
R4010	1-218-863-91	s	RES, CHIP 4.7K (1608)
R4011	1-218-863-91	s	RES, CHIP 4.7K (1608)
R4012	1-218-871-91	s	RES, CHIP 10K (1608)
T41	⚠ 1-445-855-11	s	TRANSFORMER, CONVERTER
T401	⚠ 1-457-916-11	s	COIL, PFC CHOKE
T402	⚠ 1-445-848-11	s	TRANSFORMER, DRIVE

RE-274 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	⚠ A-1771-369-A	s	MOUNTED CIRCUIT BOARD, RE-274
0.25pcs	7-600-000-48	s	ADHESIVE AGENT(SC608LVZ2)180ML
C61	1-113-900-51	s	CAP, CERAMIC 470PF B
C601	⚠ 1-112-912-21	s	CAP, ELECT 10MF
C602	⚠ 1-114-921-21	s	CAP, CERAMIC 0.22MF X7R (5750)
C604	1-165-947-91	s	CAP, CHIP CERAMIC 2.2MF B 3225
C605	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C606	1-112-679-21	s	CAP,CERAMIC 2200PF B (3216)
C607	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C609	1-112-800-11	s	CAP, ELECT 100MF
C610	1-112-798-11	s	CAP, ELECT 10MF
C612	1-162-964-91	s	CAP,CHIP CERAMIC 1000PF B 1608
C6001	1-114-499-11	s	CAP, ELECT 47MF
C6002	1-114-499-11	s	CAP, ELECT 47MF
C6003	1-112-801-11	s	CAP, ELECT 220MF
C6004	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C6005	1-162-966-91	s	CAP, CERAMIC 2200PF B 1608
C6006	1-115-340-91	s	CAP, CERAMIC 0.22MF B (2012)
C6007	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C6008	1-162-964-91	s	CAP,CHIP CERAMIC 1000PF B 1608
C6009	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C6010	1-125-898-91	s	CAP, CERAMIC 0.22MF B (3216)
C6011	1-162-964-91	s	CAP,CHIP CERAMIC 1000PF B 1608
C6012	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C6013	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C6014	1-127-715-91	s	CAP,CHIP CERAMIC 0.22MF B 1608
C6015	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C6016	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C6017	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C6018	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C6019	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C6022	1-125-898-91	s	CAP, CERAMIC 0.22MF B (3216)
C6024	1-125-898-91	s	CAP, CERAMIC 0.22MF B (3216)
C6026	1-125-898-91	s	CAP, CERAMIC 0.22MF B (3216)
C6028	1-125-898-91	s	CAP, CERAMIC 0.22MF B (3216)
C6110	1-112-801-11	s	CAP, ELECT 220MF
C6111	1-165-947-91	s	CAP, CHIP CERAMIC 2.2MF B 3225
C6121	1-112-801-11	s	CAP, ELECT 220MF
C7001	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C7002	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C7003	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C7004	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C7005	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C7006	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C7008	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C7009	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C7010	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C7011	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C7012	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C7013	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C7014	1-114-965-11	s	CAP, CERAMIC 4.7MF X7R (3225)
C7015	1-114-965-11	s	CAP, CERAMIC 4.7MF X7R (3225)
C7016	1-112-861-11	s	CAP, ELECT 150MF (8X7.7)
C7017	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C7018	1-114-965-11	s	CAP, CERAMIC 4.7MF X7R (3225)
C7019	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C7020	1-114-965-11	s	CAP, CERAMIC 4.7MF X7R (3225)
C7022	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(RE-274 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C7023	1-162-923-91	s	CAP, CERAMIC 47PF CH 1608
C7024	1-162-923-91	s	CAP, CERAMIC 47PF CH 1608
C7025	1-162-923-91	s	CAP, CERAMIC 47PF CH 1608
C7026	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C7027	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C7028	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C7029	1-163-021-91	s	CAP, CERAMIC 10000PF B (2012)
C7031	1-162-964-91	s	CAP,CHIP CERAMIC 1000PF B 1608
C7032	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C7033	1-163-021-91	s	CAP, CERAMIC 10000PF B (2012)
C7035	1-164-230-91	s	CAP,CERAMIC 220PF CH 1608
C7037	1-164-227-91	s	CAP,CERAMIC 22000PF B 1608
C7038	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C7039	1-164-227-91	s	CAP,CERAMIC 22000PF B 1608
C7040	1-162-969-91	s	CAP, CERAMIC 6800PF B 1608
C7041	1-162-964-91	s	CAP,CHIP CERAMIC 1000PF B 1608
C7042	1-162-964-91	s	CAP,CHIP CERAMIC 1000PF B 1608
C7043	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C7044	1-162-969-91	s	CAP, CERAMIC 6800PF B 1608
C7045	1-162-964-91	s	CAP,CHIP CERAMIC 1000PF B 1608
C7046	1-162-964-91	s	CAP,CHIP CERAMIC 1000PF B 1608
C7047	1-137-980-91	s	CAP,CHIP CERAMIC 0.47MF B 3216
C7048	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C7049	1-165-875-91	s	CAP, CHIP CERAMIC 10MF B 3216
C7050	1-165-875-91	s	CAP, CHIP CERAMIC 10MF B 3216
C7051	1-164-230-91	s	CAP,CERAMIC 220PF CH 1608
C7052	1-116-487-11	s	CAP, CHIP ELECT 10MF (6.3X7.7)
C7055	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C7057	1-114-965-11	s	CAP, CERAMIC 4.7MF X7R (3225)
C7058	1-162-964-91	s	CAP,CHIP CERAMIC 1000PF B 1608
C7059	1-162-964-91	s	CAP,CHIP CERAMIC 1000PF B 1608
C7060	1-162-964-91	s	CAP,CHIP CERAMIC 1000PF B 1608
C7061	1-162-964-91	s	CAP,CHIP CERAMIC 1000PF B 1608
C7062	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C7063	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C7064	1-163-021-91	s	CAP, CERAMIC 10000PF B (2012)
C7065	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C7066	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C7067	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C7068	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C7069	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C7070	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C7071	1-162-964-91	s	CAP,CHIP CERAMIC 1000PF B 1608
C7072	1-162-964-91	s	CAP,CHIP CERAMIC 1000PF B 1608
C7073	1-162-964-91	s	CAP,CHIP CERAMIC 1000PF B 1608
C7074	1-115-340-91	s	CAP, CERAMIC 0.22MF B (2012)
C7075	1-115-340-91	s	CAP, CERAMIC 0.22MF B (2012)
C7076	1-114-250-21	s	CAP, ELECT 150MF (8X6.9)
C7077	1-114-250-21	s	CAP, ELECT 150MF (8X6.9)
C7078	1-114-250-21	s	CAP, ELECT 150MF (8X6.9)
C7079	1-114-250-21	s	CAP, ELECT 150MF (8X6.9)
C7080	1-165-947-91	s	CAP, CHIP CERAMIC 2.2MF B 3225
C7084	1-114-965-11	s	CAP, CERAMIC 4.7MF X7R (3225)
C7087	1-162-964-91	s	CAP,CHIP CERAMIC 1000PF B 1608
C7088	1-116-487-11	s	CAP, CHIP ELECT 10MF (6.3X7.7)
C7092	1-116-174-11	s	CAP, CHIP ELECT 270MF(10X10.5)
C7093	1-116-174-11	s	CAP, CHIP ELECT 270MF(10X10.5)
C7094	1-163-021-91	s	CAP, CERAMIC 10000PF B (2012)
C7095	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608

(RE-274 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C7096	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C7097	1-114-236-21	s	CAP, CERAMIC 22MF B (3225)
C7098	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C7099	1-114-236-21	s	CAP, CERAMIC 22MF B (3225)
C7100	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C7101	1-114-236-21	s	CAP, CERAMIC 22MF B (3225)
C7102	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C7103	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C7104	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C8001	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C8003	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C8004	1-114-415-21	s	CAP, ELECT 100MF (5X5.9)
C8005	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C8006	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C8007	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C8008	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C8009	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C8010	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C8011	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C8012	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C8013	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C8014	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C8015	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C8016	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C8017	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C8019	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C8020	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C8021	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C8022	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C8023	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C8024	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C8025	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C8026	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C8027	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C8028	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C8030	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C8031	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C8033	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C8035	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C8039	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C8042	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C8044	1-100-672-91	s	CAP, CERAMIC 10MF C (3216)
CN601 ⚠	1-785-706-11	o	PIN, CONNECTOR (PC BOARD) 10P
CN6001 ⚠	1-794-824-11	s	PIN,CONNECTOR(B14B-PASK-1N)14P
CN6002 ⚠	1-818-714-21	s	HEADER ASSEMBLY 20P
CN7001	1-580-547-11	o	PIN, CONNECTOR (PC BOARD) 36P
CN8001	1-784-254-21	s	CONNECTOR 10P
CN8003	1-560-365-11	s	CONNECTOR POST HEADER,ILG (3P)
D601	8-719-069-28	s	DI 1SS400FJTE61
D602	8-719-069-55	s	DI UDZSUSTE-175.6B
D603	6-501-658-01	s	DIODE D1FK60
D604	8-719-066-92	s	DIODE D1FL20U-TA
D605	8-719-066-92	s	DIODE D1FL20U-TA
D606	8-719-083-85	s	DI UDZSUSTE-1722B
D6001	8-719-066-92	s	DIODE D1FL20U-TA
D6002	8-719-027-63	s	DIODE D2FL20U-TA
D6003	8-719-066-92	s	DIODE D1FL20U-TA
D6006	8-719-069-28	s	DI 1SS400FJTE61

(RE-274 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
D6009	8-719-069-28	s	DI 1SS400FJTE61
D6010	8-719-069-28	s	DI 1SS400FJTE61
D6011	8-719-069-28	s	DI 1SS400FJTE61
D7002	8-719-072-43	s	DIODE RB050L-40TE25
D7003	8-719-027-63	s	DIODE D2FL20U-TA
D7004	8-719-056-48	s	DIODE 1SS388(TPL3)
D7005	8-719-056-48	s	DIODE 1SS388(TPL3)
D7006	6-500-528-01	s	DIODE DE5SC6M-7071
D7007	8-719-938-77	s	DIODE SB05-05C-TB-E
D7008	8-719-938-77	s	DIODE SB05-05C-TB-E
D7009	8-719-056-48	s	DIODE 1SS388(TPL3)
D7010	8-719-056-48	s	DIODE 1SS388(TPL3)
D7012	6-502-254-01	s	DI KDZTR6.8B
D7013	6-502-255-01	s	DI KDZTR7.5B
D7015	8-719-083-83	s	DI UDZSUSTE-1715B
D7016	6-502-526-01	s	DI UDZSUSTE-172.0B
D7017	8-719-069-28	s	DI 1SS400FJTE61
D8001	8-719-069-28	s	DI 1SS400FJTE61
D8002	8-719-069-28	s	DI 1SS400FJTE61
D8008	8-719-083-57	s	DI UDZSUSTE-173.6B
D8013	8-719-051-04	s	DIODE EC10QS04-TE12L5
D8014	8-719-069-56	s	DI UDZSUSTE-176.2B
D8015	8-719-069-56	s	DI UDZSUSTE-176.2B
FB7001	1-414-581-21	s	FERRITE, EMI (SMD) (4516)
FB7002	1-414-581-21	s	FERRITE, EMI (SMD) (4516)
FB7004	1-414-581-21	s	FERRITE, EMI (SMD) (4516)
FB7005	1-414-581-21	s	FERRITE, EMI (SMD) (4516)
FB7006	1-414-581-21	s	FERRITE, EMI (SMD) (4516)
FB7007	1-414-581-21	s	FERRITE, EMI (SMD) (4516)
FB7008	1-414-581-21	s	FERRITE, EMI (SMD) (4516)
FB7009	1-414-581-21	s	FERRITE, EMI (SMD) (4516)
FB7010	1-414-581-21	s	FERRITE, EMI (SMD) (4516)
FB7011	1-414-581-21	s	FERRITE, EMI (SMD) (4516)
FB8001	1-416-976-21	s	FERRITE, EMI (SMD) (3216)
FL7001	1-200-054-11	s	FILTER, NOISE REMOVAL
FL7002	1-200-054-11	s	FILTER, NOISE REMOVAL
IC601 ⚠	6-713-051-01	s	IC STR-A6153E
IC2014	8-759-338-95	s	IC NJM2903V(TE2)
IC2015	8-759-338-95	s	IC NJM2903V(TE2)
IC6001	6-711-947-01	s	IC MM1431CURE
IC6002	6-713-278-01	s	IC MAX4374HEUB+TG069
IC6003	6-711-947-01	s	IC MM1431CURE
IC6021	8-759-338-95	s	IC NJM2903V(TE2)
IC7001	8-759-338-95	s	IC NJM2903V(TE2)
IC7002	6-711-654-01	s	IC TPS5420DRG4
IC7003	8-759-338-95	s	IC NJM2903V(TE2)
IC7004	8-759-338-95	s	IC NJM2903V(TE2)
IC7005	8-759-142-20	s	IC UPC842G2-E2
IC7007	6-711-947-01	s	IC MM1431CURE
IC7008	6-711-947-01	s	IC MM1431CURE
IC7009	6-714-161-01	s	IC LM5576MHX
IC7010	6-702-510-01	s	IC TPS5120DBTRG4
IC7011	6-701-652-01	s	IC MAX4374TEUB+TG069
IC7012	6-715-222-01	s	IC INA206AIDGSR
IC8002	6-709-014-01	s	IC UPC2933BT-E2-AZ
IC8003	6-707-862-01	s	IC TC74VHC05FT(EKJ)
IC8004	6-707-888-01	s	IC TC74VHCT14AFT(EKJ)

(RE-274 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC8005	6-715-320-01	s	IC EPM570T100I5N
IC8006	6-707-888-01	s	IC TC74VHCT14AFT(EKJ)
IC8007	6-702-879-01	s	IC R3112N281A-TR-FA
IC8008	6-707-862-01	s	IC TC74VHC05FT(EKJ)
IC8009	6-707-862-01	s	IC TC74VHC05FT(EKJ)
IC8011	6-707-862-01	s	IC TC74VHC05FT(EKJ)
IC8013	8-759-052-52	s	IC NJM78M05DL1A-TE1
L6001	1-481-603-11	s	BEAD, AMORPHOUS AB-SN 3X2X3SM
L7001	1-400-303-21	s	COIL, CHOKE 68UH
L7002	1-419-524-21	s	COIL, CHOKE
L7003	1-457-907-11	s	COIL, CHOKE 16UH
L7004	1-457-907-11	s	COIL, CHOKE 16UH
L7005	1-456-622-21	s	COIL, CHOKE 1UH
L7006	1-456-046-21	s	COIL, CHOKE (SMD) 10UH(10X10)
L7007	1-456-622-21	s	COIL, CHOKE 1UH
L7008	1-456-046-21	s	COIL, CHOKE (SMD) 10UH(10X10)
L7009	1-456-046-21	s	COIL, CHOKE (SMD) 10UH(10X10)
LP1	4-369-317-01	s	PIN, COATING LEAD
PH61 ⚠	8-749-016-82	s	PHOTO COUPLER PC123GY2J00F
PH62 ⚠	8-749-016-82	s	PHOTO COUPLER PC123GY2J00F
PH63 ⚠	8-749-016-82	s	PHOTO COUPLER PC123GY2J00F
PH64 ⚠	8-749-016-82	s	PHOTO COUPLER PC123GY2J00F
PH65 ⚠	8-749-016-82	s	PHOTO COUPLER PC123GY2J00F
PH66 ⚠	8-749-016-82	s	PHOTO COUPLER PC123GY2J00F
PH7001	6-600-477-01	s	IC TLP281(GB-TP,F)
PH7002	6-600-477-01	s	IC TLP281(GB-TP,F)
PH7004	6-600-477-01	s	IC TLP281(GB-TP,F)
PH7006	6-600-477-01	s	IC TLP281(GB-TP,F)
Q6001	6-552-545-01	s	TR SI4425DDY-T1-GE3
Q6002	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q7001	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q7002	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q7006	6-551-952-01	s	TR NTD4804NT4G
Q7007	6-551-952-01	s	TR NTD4804NT4G
Q7008	6-551-952-01	s	TR NTD4804NT4G
Q7009	6-551-952-01	s	TR NTD4804NT4G
Q7011	8-729-927-99	s	TRANSISTOR 2SC4617TL-QR
Q7015	8-729-230-49	s	TRANSISTOR 2SC2712-YG-TE85L
Q7016	6-552-271-01	s	TR FDS8880
Q7017	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q8002	8-729-927-99	s	TRANSISTOR 2SC4617TL-QR
Q8004	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q8005	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q8006	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q8007	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q8008	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q8009	8-729-928-82	s	TRANSISTOR DTC144EE-TL
R601 ⚠	1-246-155-21	s	RES, NONFLAMMABLE FUSE 1.0
R608	1-211-969-91	s	RES, CHIP 10 (1608)
R609	1-220-305-91	o	RES,SQUARE TYPE CHIP 22K(4532)
R610	1-220-305-91	o	RES,SQUARE TYPE CHIP 22K(4532)
R611	1-220-149-91	s	RES,SQUARE TYPE CHIP 2.2(4532)
R612	1-220-149-91	s	RES,SQUARE TYPE CHIP 2.2(4532)
R615	1-211-981-91	s	RES, CHIP 33 (1608)
R616	1-220-230-91	s	RES,SQUARE TYPE CHIP 2.2(3225)
R617	1-208-911-81	s	RES, CHIP 10K (1005)
R619	1-208-911-81	s	RES, CHIP 10K (1005)

(RE-274 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R620	1-208-935-81	s	RES, CHIP 100K (1005)
R622	1-208-935-81	s	RES, CHIP 100K (1005)
R6001	1-208-935-81	s	RES, CHIP 100K (1005)
R6002	1-208-935-81	s	RES, CHIP 100K (1005)
R6003	1-208-903-81	s	RES, CHIP 4.7K (1005)
R6004	1-208-935-81	s	RES, CHIP 100K (1005)
R6005	1-208-923-81	s	RES, CHIP 33K (1005)
R6006	1-218-875-91	s	RES, CHIP 15K (1608)
R6007	1-218-875-91	s	RES, CHIP 15K (1608)
R6008	1-218-875-91	s	RES, CHIP 15K (1608)
R6013	1-208-911-81	s	RES, CHIP 10K (1005)
R6014	1-208-907-81	s	RES, CHIP 6.8K (1005)
R6016	1-208-923-81	s	RES, CHIP 33K (1005)
R6017	1-208-903-81	s	RES, CHIP 4.7K (1005)
R6018	1-219-684-21	s	RES, CHIP (SQUARE TYPE) 0.01
R6022	1-208-715-11	s	RES, CHIP 22K (1005)
R6026	1-208-911-81	s	RES, CHIP 10K (1005)
R6028	1-208-923-81	s	RES, CHIP 33K (1005)
R6031	1-208-911-81	s	RES, CHIP 10K (1005)
R6032	1-208-899-81	s	RES, CHIP 3.3K (1005)
R6033	1-208-895-81	s	RES, CHIP 2.2K (1005)
R6034	1-208-867-81	s	RES, CHIP 150 (1005)
R6039	1-208-923-81	s	RES, CHIP 33K (1005)
R6042	1-208-923-81	s	RES, CHIP 33K (1005)
R6048	1-208-846-91	s	RES, CHIP 470K (2012)
R6049	1-208-846-91	s	RES, CHIP 470K (2012)
R6050	1-208-830-91	s	RES, CHIP 100K (2012)
R6051	1-208-806-91	s	RES, CHIP 10K (2012)
R6052	1-208-786-91	s	RES, CHIP 1.5K (2012)
R6053	1-208-786-91	s	RES, CHIP 1.5K (2012)
R6054	1-208-782-91	s	RES, CHIP 1.0K (2012)
R6055	1-208-790-91	s	RES, CHIP 2.2K (2012)
R6056	1-208-782-91	s	RES, CHIP 1.0K (2012)
R6057	1-208-798-91	s	RES, CHIP 4.7K (2012)
R6058	1-208-826-91	s	RES, CHIP 68K (2012)
R6059	1-208-854-91	s	RES, CHIP 1M (2012)
R6060	1-208-850-91	s	RES, CHIP 680K (2012)
R6061	1-208-834-91	s	RES, CHIP 150K (2012)
R6062	1-208-838-91	s	RES, CHIP 220K (2012)
R6063	1-208-822-91	s	RES, CHIP 47K (2012)
R6064	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R6066	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R6068	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R6073	1-208-935-81	s	RES, CHIP 100K (1005)
R6075	1-208-899-81	s	RES, CHIP 3.3K (1005)
R6076	1-208-899-81	s	RES, CHIP 3.3K (1005)
R6077	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R6091	1-243-964-91	s	RES, METAL FILM (CHIP) 100K
R6092	1-220-302-91	s	RES,SQUARE TYPE CHIP 10K(4532)
R6093	1-220-302-91	s	RES,SQUARE TYPE CHIP 10K(4532)
R6094	1-218-369-91	s	RES,SQUARE TYPE CHIP 2.2K 4532
R6095	1-218-369-91	s	RES,SQUARE TYPE CHIP 2.2K 4532
R6097	1-218-875-91	s	RES, CHIP 15K (1608)
R6098	1-208-887-81	s	RES, CHIP 1.0K (1005)
R6099	1-208-935-81	s	RES, CHIP 100K (1005)
R7001	1-218-985-11	s	RES, CHIP 470K (1005)
R7002	1-218-985-11	s	RES, CHIP 470K (1005)
R7006	1-208-911-81	s	RES, CHIP 10K (1005)
R7012	1-208-903-81	s	RES, CHIP 4.7K (1005)

(RE-274 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R7017	1-220-882-81	s	RES, CHIP 33 (1005)
R7020	1-208-903-81	s	RES, CHIP 4.7K (1005)
R7021	1-208-879-81	s	RES, CHIP 470 (1005)
R7022	1-208-887-81	s	RES, CHIP 1.0K (1005)
R7023	1-208-879-81	s	RES, CHIP 470 (1005)
R7024	1-208-863-81	s	RES, CHIP 100 (1005)
R7025	1-208-863-81	s	RES, CHIP 100 (1005)
R7026	1-208-923-81	s	RES, CHIP 33K (1005)
R7029	1-208-923-81	s	RES, CHIP 33K (1005)
R7030	1-208-927-81	s	RES, CHIP 47K (1005)
R7031	1-208-863-81	s	RES, CHIP 100 (1005)
R7033	1-208-879-81	s	RES, CHIP 470 (1005)
R7034	1-208-911-81	s	RES, CHIP 10K (1005)
R7035	1-208-939-81	s	RES, CHIP 150K (1005)
R7036	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R7037	1-208-899-81	s	RES, CHIP 3.3K (1005)
R7038	1-208-911-81	s	RES, CHIP 10K (1005)
R7039	1-208-911-81	s	RES, CHIP 10K (1005)
R7040	1-218-989-11	s	RES, CHIP 1M (1005)
R7041	1-208-671-11	s	RES, CHIP 330 (1005)
R7042	1-208-911-81	s	RES, CHIP 10K (1005)
R7043	1-208-923-81	s	RES, CHIP 33K (1005)
R7044	1-208-899-81	s	RES, CHIP 3.3K (1005)
R7045	1-208-715-11	s	RES, CHIP 22K (1005)
R7047	1-208-927-81	s	RES, CHIP 47K (1005)
R7049	1-208-911-81	s	RES, CHIP 10K (1005)
R7050	1-208-895-81	s	RES, CHIP 2.2K (1005)
R7051	1-208-927-81	s	RES, CHIP 47K (1005)
R7053	1-208-899-81	s	RES, CHIP 3.3K (1005)
R7054	1-208-911-81	s	RES, CHIP 10K (1005)
R7055	1-208-911-81	s	RES, CHIP 10K (1005)
R7060	1-208-907-81	s	RES, CHIP 6.8K (1005)
R7061	1-208-715-11	s	RES, CHIP 22K (1005)
R7062	1-208-903-81	s	RES, CHIP 4.7K (1005)
R7063	1-208-715-11	s	RES, CHIP 22K (1005)
R7064	1-208-899-81	s	RES, CHIP 3.3K (1005)
R7065	1-208-939-81	s	RES, CHIP 150K (1005)
R7066	1-218-614-91	s	RES, METAL FILM (CHIP) 10
R7067	1-208-907-81	s	RES, CHIP 6.8K (1005)
R7068	1-208-911-81	s	RES, CHIP 10K (1005)
R7069	1-208-907-81	s	RES, CHIP 6.8K (1005)
R7071	1-208-911-81	s	RES, CHIP 10K (1005)
R7072	1-208-715-11	s	RES, CHIP 22K (1005)
R7074	1-208-939-81	s	RES, CHIP 150K (1005)
R7075	1-208-915-81	s	RES, CHIP 15K (1005)
R7076	1-208-879-81	s	RES, CHIP 470 (1005)
R7077	1-220-222-91	s	RES,SQUARE TYPE CHIP 4.7K 4532
R7078	1-208-715-11	s	RES, CHIP 22K (1005)
R7080	1-208-895-81	s	RES, CHIP 2.2K (1005)
R7081	1-208-911-81	s	RES, CHIP 10K (1005)
R7083	1-220-870-81	s	RES, CHIP 10 (1005)
R7084	1-208-879-81	s	RES, CHIP 470 (1005)
R7085	1-220-870-81	s	RES, CHIP 10 (1005)
R7086	1-208-911-81	s	RES, CHIP 10K (1005)
R7087	1-208-895-81	s	RES, CHIP 2.2K (1005)
R7088	1-208-887-81	s	RES, CHIP 1.0K (1005)
R7089	1-219-706-21	s	RES, CHIP (SQUARE TYPE) 0.10
R7090	1-208-879-81	s	RES, CHIP 470 (1005)
R7092	1-219-706-21	s	RES, CHIP (SQUARE TYPE) 0.10

(RE-274 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R7094	1-220-258-91	s	RES,SQUARE TYPE CHIP 100(3225)
R7095	1-208-871-81	s	RES, CHIP 220 (1005)
R7096	1-208-915-81	s	RES, CHIP 15K (1005)
R7097	1-208-911-81	s	RES, CHIP 10K (1005)
R7098	1-208-867-81	s	RES, CHIP 150 (1005)
R7099	1-208-895-81	s	RES, CHIP 2.2K (1005)
R7100	1-208-903-81	s	RES, CHIP 4.7K (1005)
R7102	1-208-931-81	s	RES, CHIP 68K (1005)
R7103	1-208-903-81	s	RES, CHIP 4.7K (1005)
R7104	1-208-715-11	s	RES, CHIP 22K (1005)
R7105	1-208-911-81	s	RES, CHIP 10K (1005)
R7106	1-208-899-81	s	RES, CHIP 3.3K (1005)
R7107	1-208-715-11	s	RES, CHIP 22K (1005)
R7108	1-208-903-81	s	RES, CHIP 4.7K (1005)
R7109	1-208-899-81	s	RES, CHIP 3.3K (1005)
R7110	1-220-882-81	s	RES, CHIP 33 (1005)
R7111	1-208-895-81	s	RES, CHIP 2.2K (1005)
R7112	1-242-797-21	s	RES, CHIP (SQUARE TYPE) 0.15
R7113	1-242-797-21	s	RES, CHIP (SQUARE TYPE) 0.15
R7114	1-208-955-81	s	RES, CHIP 680K (1005)
R7115	1-208-935-81	s	RES, CHIP 100K (1005)
R7116	1-208-911-81	s	RES, CHIP 10K (1005)
R7121	1-208-931-81	s	RES, CHIP 68K (1005)
R7123	1-208-911-81	s	RES, CHIP 10K (1005)
R7125	1-208-923-81	s	RES, CHIP 33K (1005)
R7126	1-208-935-81	s	RES, CHIP 100K (1005)
R7127	1-208-911-81	s	RES, CHIP 10K (1005)
R7128	1-208-935-81	s	RES, CHIP 100K (1005)
R7130	1-208-911-81	s	RES, CHIP 10K (1005)
R7157	1-220-258-91	s	RES,SQUARE TYPE CHIP 100(3225)
R7158	1-220-258-91	s	RES,SQUARE TYPE CHIP 100(3225)
R7159	1-220-258-91	s	RES,SQUARE TYPE CHIP 100(3225)
R7160	1-220-258-91	s	RES,SQUARE TYPE CHIP 100(3225)
R7161	1-208-903-81	s	RES, CHIP 4.7K (1005)
R7168	1-208-927-81	s	RES, CHIP 47K (1005)
R7169	1-208-911-81	s	RES, CHIP 10K (1005)
R7170	1-208-887-81	s	RES, CHIP 1.0K (1005)
R7171	1-208-935-81	s	RES, CHIP 100K (1005)
R7172	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R7173	1-208-859-81	s	RES, CHIP 68 (1005)
R7175	1-208-935-81	s	RES, CHIP 100K (1005)
R7176	1-208-895-81	s	RES, CHIP 2.2K (1005)
R7177	1-208-895-81	s	RES, CHIP 2.2K (1005)
R7178	1-208-887-81	s	RES, CHIP 1.0K (1005)
R7179	1-208-895-81	s	RES, CHIP 2.2K (1005)
R7180	1-208-715-11	s	RES, CHIP 22K (1005)
R7181	1-208-911-81	s	RES, CHIP 10K (1005)
R7182	1-208-715-11	s	RES, CHIP 22K (1005)
R7183	1-208-883-81	s	RES, CHIP 680 (1005)
R7188	1-208-907-81	s	RES, CHIP 6.8K (1005)
R7189	1-208-923-81	s	RES, CHIP 33K (1005)
R7190	1-208-903-81	s	RES, CHIP 4.7K (1005)
R7191	1-208-903-81	s	RES, CHIP 4.7K (1005)
R7192	1-208-911-81	s	RES, CHIP 10K (1005)
R7193	1-220-222-91	s	RES,SQUARE TYPE CHIP 4.7K 4532
R7194	1-220-222-91	s	RES,SQUARE TYPE CHIP 4.7K 4532
R8004	1-208-863-81	s	RES, CHIP 100 (1005)
R8005	1-208-911-81	s	RES, CHIP 10K (1005)
R8006	1-208-911-81	s	RES, CHIP 10K (1005)

(RE-274 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R8007	1-220-878-81	s	RES, CHIP 22 (1005)
R8011	1-208-887-81	s	RES, CHIP 1.0K (1005)
R8012	1-208-911-81	s	RES, CHIP 10K (1005)
R8015	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R8016	1-208-911-81	s	RES, CHIP 10K (1005)
R8019	1-208-903-81	s	RES, CHIP 4.7K (1005)
R8020	1-208-915-81	s	RES, CHIP 15K (1005)
R8022	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R8026	1-208-887-81	s	RES, CHIP 1.0K (1005)
R8027	1-208-895-81	s	RES, CHIP 2.2K (1005)
R8028	1-208-895-81	s	RES, CHIP 2.2K (1005)
R8029	1-208-911-81	s	RES, CHIP 10K (1005)
R8030	1-208-911-81	s	RES, CHIP 10K (1005)
R8031	1-208-911-81	s	RES, CHIP 10K (1005)
RB8001	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB8003	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB8005	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB8006	1-234-376-21	s	RES, NETWORK 2.2K (1005X4)
RB8007	1-234-376-21	s	RES, NETWORK 2.2K (1005X4)
RB8009	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB8010	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB8011	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB8012	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB8014	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB8015	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB8016	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB8017	1-234-375-21	s	RES, NETWORK 1K (1005X4)
S8001	1-771-709-41	s	SWITCH, SLIDE
T61	⚠ 1-445-786-11	s	TRANSFORMER, CONVERTER (STBY)
TP6001	1-535-877-22	s	CHIP, CHECKER
TP6004	1-535-877-22	s	CHIP, CHECKER
TP6006	1-780-318-11	s	TERMINAL, LUG
TP6007	1-780-318-11	s	TERMINAL, LUG
TP6008	1-780-318-11	s	TERMINAL, LUG
TP6009	1-780-318-11	s	TERMINAL, LUG
TP6010	1-780-318-11	s	TERMINAL, LUG
TP6011	1-780-318-11	s	TERMINAL, LUG
X8001	1-813-329-11	s	OSCILLATOR, CRYSTAL

RE-276 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	⚠ A-1771-135-A	s	MOUNTED CIRCUIT BOARD, RE-276
C601	1-162-964-91	s	CAP,CHIP CERAMIC 1000PF B 1608
C6008	1-115-340-91	s	CAP, CERAMIC 0.22MF B (2012)
C6009	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C6010	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C6011	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C6012	1-162-964-91	s	CAP,CHIP CERAMIC 1000PF B 1608
C6013	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C6014	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C6015	1-162-964-91	s	CAP,CHIP CERAMIC 1000PF B 1608
C6016	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C6017	1-127-715-91	s	CAP,CHIP CERAMIC 0.22MF B 1608
C6018	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C6019	1-115-340-91	s	CAP, CERAMIC 0.22MF B (2012)
C6020	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C6024	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C6025	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C6026	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C6027	1-116-174-11	s	CAP, CHIP ELECT 270MF(10X10.5)
C6028	1-112-800-11	s	CAP, ELECT 100MF
C6029	1-114-499-11	s	CAP, ELECT 47MF
C6030	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C6031	1-100-761-21	s	CAP, CHIP CERAMIC 10000PF 2012
C6032	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C6111	1-165-947-91	s	CAP, CHIP CERAMIC 2.2MF B 3225
C7003	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C7004	1-114-965-11	s	CAP, CERAMIC 4.7MF X7R (3225)
C7005	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C7006	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C7007	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C7008	1-114-965-11	s	CAP, CERAMIC 4.7MF X7R (3225)
C7009	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C7010	1-162-923-91	s	CAP, CERAMIC 47PF CH 1608
C7011	1-162-923-91	s	CAP, CERAMIC 47PF CH 1608
C7012	1-162-923-91	s	CAP, CERAMIC 47PF CH 1608
C7013	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C7014	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C7015	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C7016	1-163-021-91	s	CAP, CERAMIC 10000PF B (2012)
C7017	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C7018	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C7019	1-114-965-11	s	CAP, CERAMIC 4.7MF X7R (3225)
C7020	1-163-021-91	s	CAP, CERAMIC 10000PF B (2012)
C7021	1-114-965-11	s	CAP, CERAMIC 4.7MF X7R (3225)
C7023	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C7024	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C7025	1-164-227-91	s	CAP,CERAMIC 22000PF B 1608
C7026	1-164-227-91	s	CAP,CERAMIC 22000PF B 1608
C7028	1-162-964-91	s	CAP,CHIP CERAMIC 1000PF B 1608
C7029	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C7030	1-164-230-91	s	CAP,CERAMIC 220PF CH 1608
C7031	1-162-969-91	s	CAP, CERAMIC 6800PF B 1608
C7032	1-162-969-91	s	CAP, CERAMIC 6800PF B 1608
C7033	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C7034	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C7035	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C7036	1-165-875-91	s	CAP, CHIP CERAMIC 10MF B 3216
C7037	1-165-875-91	s	CAP, CHIP CERAMIC 10MF B 3216

(RE-276 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C7038	1-112-861-11	s	CAP, ELECT 150MF (8X7.7)
C7039	1-137-980-91	s	CAP,CHIP CERAMIC 0.47MF B 3216
C7040	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C7041	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C7042	1-164-230-91	s	CAP,CERAMIC 220PF CH 1608
C7044	1-116-174-11	s	CAP, CHIP ELECT 270MF(10X10.5)
C7045	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C7046	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C7047	1-162-964-91	s	CAP,CHIP CERAMIC 1000PF B 1608
C7049	1-116-174-11	s	CAP, CHIP ELECT 270MF(10X10.5)
C7050	1-114-965-11	s	CAP, CERAMIC 4.7MF X7R (3225)
C7051	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C7052	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C7053	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C7054	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C7055	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C7056	1-162-964-91	s	CAP,CHIP CERAMIC 1000PF B 1608
C7057	1-162-964-91	s	CAP,CHIP CERAMIC 1000PF B 1608
C7058	1-162-964-91	s	CAP,CHIP CERAMIC 1000PF B 1608
C7059	1-162-964-91	s	CAP,CHIP CERAMIC 1000PF B 1608
C7060	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C7061	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C7062	1-114-250-21	s	CAP, ELECT 150MF (8X6.9)
C7063	1-114-250-21	s	CAP, ELECT 150MF (8X6.9)
C7064	1-114-250-21	s	CAP, ELECT 150MF (8X6.9)
C7065	1-162-964-91	s	CAP,CHIP CERAMIC 1000PF B 1608
C7066	1-162-964-91	s	CAP,CHIP CERAMIC 1000PF B 1608
C7067	1-114-250-21	s	CAP, ELECT 150MF (8X6.9)
C7068	1-162-964-91	s	CAP,CHIP CERAMIC 1000PF B 1608
C7069	1-162-964-91	s	CAP,CHIP CERAMIC 1000PF B 1608
C7071	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C7072	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C7073	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C7075	1-115-340-91	s	CAP, CERAMIC 0.22MF B (2012)
C7076	1-163-021-91	s	CAP, CERAMIC 10000PF B (2012)
C7077	1-162-964-91	s	CAP,CHIP CERAMIC 1000PF B 1608
C7078	1-162-964-91	s	CAP,CHIP CERAMIC 1000PF B 1608
C7079	1-162-964-91	s	CAP,CHIP CERAMIC 1000PF B 1608
C7080	1-165-947-91	s	CAP, CHIP CERAMIC 2.2MF B 3225
C7083	1-116-487-11	s	CAP, CHIP ELECT 10MF (6.3X7.7)
C7084	1-116-487-11	s	CAP, CHIP ELECT 10MF (6.3X7.7)
C7094	1-163-021-91	s	CAP, CERAMIC 10000PF B (2012)
C7101	1-114-236-21	s	CAP, CERAMIC 22MF B (3225)
C7102	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C7103	1-114-236-21	s	CAP, CERAMIC 22MF B (3225)
C7104	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C7105	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C7106	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C7107	1-114-236-21	s	CAP, CERAMIC 22MF B (3225)
C7108	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C7114	1-125-898-91	s	CAP, CERAMIC 0.22MF B (3216)
C7116	1-125-898-91	s	CAP, CERAMIC 0.22MF B (3216)
C7120	1-125-898-91	s	CAP, CERAMIC 0.22MF B (3216)
C7122	1-125-898-91	s	CAP, CERAMIC 0.22MF B (3216)
C8001	1-114-965-11	s	CAP, CERAMIC 4.7MF X7R (3225)
C8002	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C8004	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C8005	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C8006	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608

(RE-276 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C8007	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C8008	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C8009	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C8010	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C8011	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C8012	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C8013	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C8014	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C8015	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C8016	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C8017	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C8019	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C8020	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C8021	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C8022	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C8023	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C8024	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C8025	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C8026	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C8027	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C8028	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C8030	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C8031	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C8033	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C8040	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C8041	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C8043	1-116-174-11	s	CAP, CHIP ELECT 270MF(10X10.5)
C8044	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C8045	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C8046	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C8047	1-114-415-21	s	CAP, ELECT 100MF (5X5.9)
CN601	⚠ 1-819-475-11	o	HEADER ASSEMBLY FOR PWB 7P
CN6001	1-794-824-11	s	PIN,CONNECTOR(B14B-PASK-1N)14P
CN7001	1-779-092-11	s	PIN, CONNECTOR (PC BOARD) 10P
CN8001	1-821-511-11	s	HEADER ASSEMBLY FOR PWB 2P
CN8002	1-818-714-21	s	HEADER ASSEMBLY 20P
CN8005	1-784-254-21	s	CONNECTOR 10P
CN8006	1-560-365-11	s	CONNECTOR POST HEADER,ILG (3P)
CN8009	1-819-442-11	s	HEADER ASSEMBLY FOR PWB 14P
D6004	8-719-069-28	s	DI 1SS400FJTE61
D6005	8-719-069-28	s	DI 1SS400FJTE61
D6008	8-719-027-63	s	DIODE D2FL20U-TA
D7003	8-719-072-43	s	DIODE RB050L-40TE25
D7004	6-500-528-01	s	DIODE DE5SC6M-7071
D7005	8-719-938-77	s	DIODE SB05-05C-TB-E
D7006	8-719-938-77	s	DIODE SB05-05C-TB-E
D7007	8-719-056-48	s	DIODE 1SS388(TPL3)
D7008	8-719-056-48	s	DIODE 1SS388(TPL3)
D7009	8-719-056-48	s	DIODE 1SS388(TPL3)
D7010	8-719-056-48	s	DIODE 1SS388(TPL3)
D7011	6-502-526-01	s	DI UDZSUSTE-172.0B
D7012	6-502-254-01	s	DI KDZTR6.8B
D7014	6-502-255-01	s	DI KDZTR7.5B
D7015	8-719-083-83	s	DI UDZSUSTE-1715B
D8001	8-719-069-28	s	DI 1SS400FJTE61
D8002	8-719-069-28	s	DI 1SS400FJTE61
D8012	8-719-938-77	s	DIODE SB05-05C-TB-E
D8013	8-719-051-04	s	DIODE EC10QS04-TE12L5

(RE-276 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
D8014	8-719-069-56	s	DI UDZSUSTE-176.2B
D8015	8-719-069-56	s	DI UDZSUSTE-176.2B
D8016	8-719-083-57	s	DI UDZSUSTE-173.6B
FB7001	1-414-581-21	s	FERRITE, EMI (SMD) (4516)
FB7002	1-414-581-21	s	FERRITE, EMI (SMD) (4516)
FB7004	1-414-581-21	s	FERRITE, EMI (SMD) (4516)
FB7005	1-414-581-21	s	FERRITE, EMI (SMD) (4516)
FB7006	1-414-581-21	s	FERRITE, EMI (SMD) (4516)
FB7007	1-414-581-21	s	FERRITE, EMI (SMD) (4516)
FB7008	1-414-581-21	s	FERRITE, EMI (SMD) (4516)
FB7009	1-414-581-21	s	FERRITE, EMI (SMD) (4516)
FB7010	1-414-581-21	s	FERRITE, EMI (SMD) (4516)
FB7011	1-414-581-21	s	FERRITE, EMI (SMD) (4516)
FB8001	1-416-976-21	s	FERRITE, EMI (SMD) (3216)
FL7001	1-200-054-11	s	FILTER, NOISE REMOVAL
FL7002	1-200-054-11	s	FILTER, NOISE REMOVAL
IC6004	6-713-278-01	s	IC MAX4374HEUB+TG069
IC6005	8-759-338-95	s	IC NJM2903V(TE2)
IC6006	8-759-338-95	s	IC NJM2903V(TE2)
IC6007	8-759-338-95	s	IC NJM2903V(TE2)
IC6008	6-701-652-01	s	IC MAX4374TEUB+TG069
IC6009	6-711-947-01	s	IC MM1431CURE
IC7002	8-759-338-95	s	IC NJM2903V(TE2)
IC7003	8-759-338-95	s	IC NJM2903V(TE2)
IC7004	6-702-510-01	s	IC TPS5120DBTRG4
IC7005	6-715-696-01	s	IC TPS5430DDAR
IC7006	6-711-947-01	s	IC MM1431CURE
IC7007	6-714-161-01	s	IC LM5576MHX
IC7008	8-759-338-95	s	IC NJM2903V(TE2)
IC7009	8-759-142-20	s	IC UPC842G2-E2
IC7010	6-711-947-01	s	IC MM1431CURE
IC7011	6-715-222-01	s	IC INA206AIDGSR
IC8003	6-707-862-01	s	IC TC74VHC05FT(EKJ)
IC8004	6-707-888-01	s	IC TC74VHCT14AFT(EKJ)
IC8005	6-715-320-01	s	IC EPM570T100I5N
IC8006	6-707-888-01	s	IC TC74VHCT14AFT(EKJ)
IC8007	6-702-879-01	s	IC R3112N281A-TR-FA
IC8008	6-707-862-01	s	IC TC74VHC05FT(EKJ)
IC8009	6-707-862-01	s	IC TC74VHC05FT(EKJ)
IC8011	6-707-862-01	s	IC TC74VHC05FT(EKJ)
IC8013	8-759-052-52	s	IC NJM78M05DL1A-TE1
IC8014	6-709-014-01	s	IC UPC2933BT-E2-AZ
L7001	1-400-303-21	s	COIL, CHOKE 68UH
L7002	1-419-524-21	s	COIL, CHOKE
L7003	1-457-907-11	s	COIL, CHOKE 16UH
L7004	1-457-907-11	s	COIL, CHOKE 16UH
L7005	1-456-046-21	s	COIL, CHOKE (SMD) 10UH(10X10)
L7007	1-456-622-21	s	COIL, CHOKE 1UH
L7008	1-456-046-21	s	COIL, CHOKE (SMD) 10UH(10X10)
L7009	1-456-046-21	s	COIL, CHOKE (SMD) 10UH(10X10)
L8001	1-456-622-21	s	COIL, CHOKE 1UH
L8002	1-416-511-21	s	COIL, CHOKE 47.0UH
L8003	1-416-511-21	s	COIL, CHOKE 47.0UH
PH61	⚠ 8-749-016-82	s	PHOTO COUPLER PC123GY2J00F
PH62	⚠ 8-749-016-82	s	PHOTO COUPLER PC123GY2J00F
PH63	⚠ 8-749-016-82	s	PHOTO COUPLER PC123GY2J00F

(RE-276 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
PH64	⚠ 8-749-016-82	s	PHOTO COUPLER PC123GY2J00F
PH7001	6-600-477-01	s	IC TLP281(GB-TP,F)
PH7002	6-600-477-01	s	IC TLP281(GB-TP,F)
PH7003	6-600-477-01	s	IC TLP281(GB-TP,F)
PH7004	6-600-477-01	s	IC TLP281(GB-TP,F)
Q6001	6-552-545-01	s	TR SI4425DDY-T1-GE3
Q6002	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q7006	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q7007	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q7008	6-551-952-01	s	TR NTD4804NT4G
Q7009	6-551-952-01	s	TR NTD4804NT4G
Q7010	6-551-952-01	s	TR NTD4804NT4G
Q7011	6-551-952-01	s	TR NTD4804NT4G
Q7012	8-729-230-49	s	TRANSISTOR 2SC2712-YG-TE85L
Q7014	8-729-230-49	s	TRANSISTOR 2SC2712-YG-TE85L
Q7016	6-552-271-01	s	TR FDS8880
Q7017	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q8001	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q8002	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q8003	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q8004	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q8005	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q8006	8-729-928-82	s	TRANSISTOR DTC144EE-TL
R601	1-208-911-81	s	RES, CHIP 10K (1005)
R602	1-208-911-81	s	RES, CHIP 10K (1005)
R603	1-208-935-81	s	RES, CHIP 100K (1005)
R604	1-208-935-81	s	RES, CHIP 100K (1005)
R6011	1-208-935-81	s	RES, CHIP 100K (1005)
R6015	1-208-923-81	s	RES, CHIP 33K (1005)
R6018	1-208-935-81	s	RES, CHIP 100K (1005)
R6019	1-219-684-21	s	RES, CHIP (SQUARE TYPE) 0.01
R6027	1-208-887-81	s	RES, CHIP 1.0K (1005)
R6028	1-208-911-81	s	RES, CHIP 10K (1005)
R6031	1-208-911-81	s	RES, CHIP 10K (1005)
R6032	1-208-899-81	s	RES, CHIP 3.3K (1005)
R6033	1-208-895-81	s	RES, CHIP 2.2K (1005)
R6034	1-208-867-81	s	RES, CHIP 150 (1005)
R6035	1-220-302-91	s	RES,SQUARE TYPE CHIP 10K(4532)
R6036	1-208-838-91	s	RES, CHIP 220K (2012)
R6037	1-220-302-91	s	RES,SQUARE TYPE CHIP 10K(4532)
R6038	1-208-923-81	s	RES, CHIP 33K (1005)
R6041	1-208-923-81	s	RES, CHIP 33K (1005)
R6043	1-208-822-91	s	RES, CHIP 47K (2012)
R6044	1-208-838-91	s	RES, CHIP 220K (2012)
R6045	1-208-814-91	s	RES, CHIP 22K (2012)
R6050	1-208-838-91	s	RES, CHIP 220K (2012)
R6051	1-208-814-91	s	RES, CHIP 22K (2012)
R6052	1-211-969-91	s	RES, CHIP 10 (1608)
R6053	1-211-969-91	s	RES, CHIP 10 (1608)
R6054	1-208-818-91	s	RES, CHIP 33K (2012)
R6055	1-208-842-91	s	RES, CHIP 330K (2012)
R6057	1-208-854-91	s	RES, CHIP 1M (2012)
R6059	1-208-854-91	s	RES, CHIP 1M (2012)
R6060	1-208-854-91	s	RES, CHIP 1M (2012)
R6061	1-208-838-91	s	RES, CHIP 220K (2012)
R6062	1-208-850-91	s	RES, CHIP 680K (2012)
R6063	1-211-969-91	s	RES, CHIP 10 (1608)
R6064	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(RE-276 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R6066	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R6068	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R6074	1-208-871-81	s	RES, CHIP 220 (1005)
R6075	1-208-915-81	s	RES, CHIP 15K (1005)
R6076	1-208-911-81	s	RES, CHIP 10K (1005)
R6078	1-242-797-21	s	RES, CHIP (SQUARE TYPE) 0.15
R6079	1-208-935-81	s	RES, CHIP 100K (1005)
R6081	1-208-899-81	s	RES, CHIP 3.3K (1005)
R6082	1-208-899-81	s	RES, CHIP 3.3K (1005)
R6083	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R6098	1-208-887-81	s	RES, CHIP 1.0K (1005)
R6099	1-208-935-81	s	RES, CHIP 100K (1005)
R6100	1-218-369-91	s	RES,SQUARE TYPE CHIP 2.2K 4532
R6101	1-218-369-91	s	RES,SQUARE TYPE CHIP 2.2K 4532
R6102	1-218-369-91	s	RES,SQUARE TYPE CHIP 2.2K 4532
R7005	1-208-911-81	s	RES, CHIP 10K (1005)
R7006	1-208-935-81	s	RES, CHIP 100K (1005)
R7009	1-208-903-81	s	RES, CHIP 4.7K (1005)
R7012	1-220-870-81	s	RES, CHIP 10 (1005)
R7013	1-208-867-81	s	RES, CHIP 150 (1005)
R7014	1-208-863-81	s	RES, CHIP 100 (1005)
R7015	1-208-863-81	s	RES, CHIP 100 (1005)
R7016	1-208-903-81	s	RES, CHIP 4.7K (1005)
R7017	1-218-985-11	s	RES, CHIP 470K (1005)
R7018	1-218-985-11	s	RES, CHIP 470K (1005)
R7019	1-208-863-81	s	RES, CHIP 100 (1005)
R7020	1-208-879-81	s	RES, CHIP 470 (1005)
R7021	1-208-903-81	s	RES, CHIP 4.7K (1005)
R7022	1-208-911-81	s	RES, CHIP 10K (1005)
R7023	1-208-911-81	s	RES, CHIP 10K (1005)
R7024	1-208-923-81	s	RES, CHIP 33K (1005)
R7025	1-208-671-11	s	RES, CHIP 330 (1005)
R7026	1-208-923-81	s	RES, CHIP 33K (1005)
R7027	1-208-927-81	s	RES, CHIP 47K (1005)
R7028	1-208-911-81	s	RES, CHIP 10K (1005)
R7029	1-208-923-81	s	RES, CHIP 33K (1005)
R7030	1-208-903-81	s	RES, CHIP 4.7K (1005)
R7032	1-208-899-81	s	RES, CHIP 3.3K (1005)
R7033	1-208-899-81	s	RES, CHIP 3.3K (1005)
R7034	1-208-911-81	s	RES, CHIP 10K (1005)
R7038	1-208-715-11	s	RES, CHIP 22K (1005)
R7039	1-208-903-81	s	RES, CHIP 4.7K (1005)
R7040	1-218-614-91	s	RES, METAL FILM (CHIP) 10
R7042	1-208-899-81	s	RES, CHIP 3.3K (1005)
R7044	1-208-903-81	s	RES, CHIP 4.7K (1005)
R7045	1-208-863-81	s	RES, CHIP 100 (1005)
R7046	1-208-887-81	s	RES, CHIP 1.0K (1005)
R7047	1-208-871-81	s	RES, CHIP 220 (1005)
R7048	1-208-887-81	s	RES, CHIP 1.0K (1005)
R7049	1-220-870-81	s	RES, CHIP 10 (1005)
R7050	1-208-883-81	s	RES, CHIP 680 (1005)
R7051	1-220-870-81	s	RES, CHIP 10 (1005)
R7052	1-208-903-81	s	RES, CHIP 4.7K (1005)
R7054	1-208-907-81	s	RES, CHIP 6.8K (1005)
R7055	1-208-883-81	s	RES, CHIP 680 (1005)
R7056	1-208-907-81	s	RES, CHIP 6.8K (1005)
R7057	1-208-907-81	s	RES, CHIP 6.8K (1005)
R7058	1-208-939-81	s	RES, CHIP 150K (1005)
R7059	1-208-915-81	s	RES, CHIP 15K (1005)

(RE-276 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R7061	1-208-923-81	s	RES, CHIP 33K (1005)
R7063	1-208-911-81	s	RES, CHIP 10K (1005)
R7064	1-208-895-81	s	RES, CHIP 2.2K (1005)
R7065	1-208-927-81	s	RES, CHIP 47K (1005)
R7069	1-208-911-81	s	RES, CHIP 10K (1005)
R7074	1-208-915-81	s	RES, CHIP 15K (1005)
R7075	1-208-879-81	s	RES, CHIP 470 (1005)
R7076	1-208-939-81	s	RES, CHIP 150K (1005)
R7077	1-208-715-11	s	RES, CHIP 22K (1005)
R7078	1-208-911-81	s	RES, CHIP 10K (1005)
R7079	1-208-715-11	s	RES, CHIP 22K (1005)
R7080	1-208-867-81	s	RES, CHIP 150 (1005)
R7084	1-208-911-81	s	RES, CHIP 10K (1005)
R7085	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R7086	1-208-899-81	s	RES, CHIP 3.3K (1005)
R7087	1-218-989-11	s	RES, CHIP 1M (1005)
R7088	1-208-911-81	s	RES, CHIP 10K (1005)
R7089	1-220-258-91	s	RES,SQUARE TYPE CHIP 100(3225)
R7090	1-220-258-91	s	RES,SQUARE TYPE CHIP 100(3225)
R7091	1-220-258-91	s	RES,SQUARE TYPE CHIP 100(3225)
R7092	1-220-258-91	s	RES,SQUARE TYPE CHIP 100(3225)
R7093	1-208-907-81	s	RES, CHIP 6.8K (1005)
R7094	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R7095	1-220-258-91	s	RES,SQUARE TYPE CHIP 100(3225)
R7096	1-208-867-81	s	RES, CHIP 150 (1005)
R7097	1-208-895-81	s	RES, CHIP 2.2K (1005)
R7098	1-208-903-81	s	RES, CHIP 4.7K (1005)
R7099	1-208-899-81	s	RES, CHIP 3.3K (1005)
R7100	1-208-939-81	s	RES, CHIP 150K (1005)
R7101	1-208-911-81	s	RES, CHIP 10K (1005)
R7109	1-219-706-21	s	RES, CHIP (SQUARE TYPE) 0.10
R7110	1-242-797-21	s	RES, CHIP (SQUARE TYPE) 0.15
R7111	1-219-706-21	s	RES, CHIP (SQUARE TYPE) 0.10
R7113	1-208-931-81	s	RES, CHIP 68K (1005)
R7114	1-208-923-81	s	RES, CHIP 33K (1005)
R7115	1-208-935-81	s	RES, CHIP 100K (1005)
R7116	1-208-911-81	s	RES, CHIP 10K (1005)
R7118	1-208-931-81	s	RES, CHIP 68K (1005)
R7119	1-208-903-81	s	RES, CHIP 4.7K (1005)
R7120	1-208-715-11	s	RES, CHIP 22K (1005)
R7121	1-208-911-81	s	RES, CHIP 10K (1005)
R7122	1-208-899-81	s	RES, CHIP 3.3K (1005)
R7124	1-208-715-11	s	RES, CHIP 22K (1005)
R7125	1-208-903-81	s	RES, CHIP 4.7K (1005)
R7126	1-208-899-81	s	RES, CHIP 3.3K (1005)
R7127	1-208-895-81	s	RES, CHIP 2.2K (1005)
R7128	1-220-882-81	s	RES, CHIP 33 (1005)
R7129	1-208-955-81	s	RES, CHIP 680K (1005)
R7130	1-208-935-81	s	RES, CHIP 100K (1005)
R7131	1-208-911-81	s	RES, CHIP 10K (1005)
R7132	1-208-911-81	s	RES, CHIP 10K (1005)
R7133	1-208-935-81	s	RES, CHIP 100K (1005)
R7134	1-208-895-81	s	RES, CHIP 2.2K (1005)
R7135	1-208-887-81	s	RES, CHIP 1.0K (1005)
R7136	1-208-895-81	s	RES, CHIP 2.2K (1005)
R7137	1-208-859-81	s	RES, CHIP 68 (1005)
R7138	1-208-715-11	s	RES, CHIP 22K (1005)
R7139	1-208-911-81	s	RES, CHIP 10K (1005)
R7140	1-208-715-11	s	RES, CHIP 22K (1005)

(RE-276 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R7148	1-208-911-81	s	RES, CHIP 10K (1005)
R7149	1-208-927-81	s	RES, CHIP 47K (1005)
R7150	1-208-883-81	s	RES, CHIP 680 (1005)
R7151	1-208-887-81	s	RES, CHIP 1.0K (1005)
R7171	1-208-935-81	s	RES, CHIP 100K (1005)
R7172	1-208-895-81	s	RES, CHIP 2.2K (1005)
R7188	1-208-903-81	s	RES, CHIP 4.7K (1005)
R7189	1-208-923-81	s	RES, CHIP 33K (1005)
R7190	1-208-907-81	s	RES, CHIP 6.8K (1005)
R7191	1-208-863-81	s	RES, CHIP 100 (1005)
R7192	1-208-911-81	s	RES, CHIP 10K (1005)
R7193	1-208-911-81	s	RES, CHIP 10K (1005)
R7194	1-218-602-91	s	RES, METAL FILM (CHIP) 1
R7195	1-218-602-91	s	RES, METAL FILM (CHIP) 1
R7196	1-218-602-91	s	RES, METAL FILM (CHIP) 1
R8004	1-208-863-81	s	RES, CHIP 100 (1005)
R8005	1-208-911-81	s	RES, CHIP 10K (1005)
R8006	1-208-911-81	s	RES, CHIP 10K (1005)
R8007	1-220-222-91	s	RES,SQUARE TYPE CHIP 4.7K 4532
R8008	1-220-222-91	s	RES,SQUARE TYPE CHIP 4.7K 4532
R8009	1-220-222-91	s	RES,SQUARE TYPE CHIP 4.7K 4532
R8011	1-208-887-81	s	RES, CHIP 1.0K (1005)
R8012	1-208-911-81	s	RES, CHIP 10K (1005)
R8015	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R8016	1-208-911-81	s	RES, CHIP 10K (1005)
R8018	1-208-887-81	s	RES, CHIP 1.0K (1005)
R8025	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R8081	1-220-878-81	s	RES, CHIP 22 (1005)
R8084	1-208-895-81	s	RES, CHIP 2.2K (1005)
R8085	1-208-895-81	s	RES, CHIP 2.2K (1005)
R8087	1-218-871-91	s	RES, CHIP 10K (1608)
R8088	1-218-871-91	s	RES, CHIP 10K (1608)
RB8001	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB8003	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB8005	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB8006	1-234-376-21	s	RES, NETWORK 2.2K (1005X4)
RB8007	1-234-376-21	s	RES, NETWORK 2.2K (1005X4)
RB8009	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB8010	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB8011	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB8012	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB8013	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB8014	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB8015	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB8016	1-234-372-21	s	RES, NETWORK 100 (1005X4)
TP6001	1-535-877-22	s	CHIP, CHECKER
TP6002	1-535-877-22	s	CHIP, CHECKER
TP7001	1-780-318-11	s	TERMINAL, LUG
TP7002	1-780-318-11	s	TERMINAL, LUG
TP7003	1-780-318-11	s	TERMINAL, LUG
TP7004	1-780-318-11	s	TERMINAL, LUG
TP7005	1-780-318-11	s	TERMINAL, LUG
TP7006	1-780-318-11	s	TERMINAL, LUG
X8001	1-813-329-11	s	OSCILLATOR, CRYSTAL

SDI-85 BOARD (suffix 11, 12, 31, 32)

※1: Board No. suffix 11, 31
※2: Board No. suffix 12, 32

Ref. No. or Q'ty		Part No.	SP	Description
1pc		A-1129-305-A	s	MOUNTED CIRCUIT BOARD, SDI-85
4pcs		3-364-941-01	s	SCREW (+B) (2.6X5), NYLOK
C1		1-128-589-21	s	CAP, CHIP ELECT 47MF
C2		1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C3		1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C4		1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C6		1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C7		1-126-394-21	s	CAP, CHIP ELECT 10MF (4X5.7)
C10		1-128-589-21	s	CAP, CHIP ELECT 47MF
C101		1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C102		1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C103		1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C104		1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C105	※1	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
	※2	1-112-324-91	s	CAP, CERAMIC 0.47MF C (1005)
C106		1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C107		1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C108		1-127-760-91	s	CAP, CHIP CERAMIC 4.7MF B 2012
C109		1-127-760-91	s	CAP, CHIP CERAMIC 4.7MF B 2012
C110		1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C111		1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C112		1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C113		1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C114		1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C115		1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C116	※2	1-112-324-91	s	CAP, CERAMIC 0.47MF C (1005)
C201	※1	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
	※2	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C202		1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C203	※1	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
	※2	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C204		1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C205	※1	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
	※2	1-112-324-91	s	CAP, CERAMIC 0.47MF C (1005)
C206		1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C207		1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C208		1-127-760-91	s	CAP, CHIP CERAMIC 4.7MF B 2012
C209		1-127-760-91	s	CAP, CHIP CERAMIC 4.7MF B 2012
C210		1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C211		1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C212		1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C213		1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C214		1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C216	※2	1-112-324-91	s	CAP, CERAMIC 0.47MF C (1005)
C301		1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C302		1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C303		1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C304		1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C305	※1	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
	※2	1-112-324-91	s	CAP, CERAMIC 0.47MF C (1005)
C306		1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C307		1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C308		1-127-760-91	s	CAP, CHIP CERAMIC 4.7MF B 2012
C309		1-127-760-91	s	CAP, CHIP CERAMIC 4.7MF B 2012
C310		1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C316	※2	1-112-324-91	s	CAP, CERAMIC 0.47MF C (1005)
C401		1-165-989-91	s	CAP, CERAMIC 10MF (2012)

(SDI-85 BOARD suffix 11, 12, 31, 32)

Ref. No. or Q'ty		Part No.	SP	Description
C402		1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C403		1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C404		1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C405	※1	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
	※2	1-112-324-91	s	CAP, CERAMIC 0.47MF C (1005)
C406		1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C407		1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C408		1-127-760-91	s	CAP, CHIP CERAMIC 4.7MF B 2012
C409		1-127-760-91	s	CAP, CHIP CERAMIC 4.7MF B 2012
C410		1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C416	※2	1-112-324-91	s	CAP, CERAMIC 0.47MF C (1005)
CN102		1-793-324-11	o	CONNECTOR, COAXIAL (BNC TYPE)
CN103		1-793-324-11	o	CONNECTOR, COAXIAL (BNC TYPE)
CN104		1-793-324-11	o	CONNECTOR, COAXIAL (BNC TYPE)
CN105		1-793-324-11	o	CONNECTOR, COAXIAL (BNC TYPE)
E1		1-535-877-22	s	CHIP, CHECKER
E2		1-535-877-22	s	CHIP, CHECKER
FB101		1-414-554-21	s	FERRITE, EMI (SMD) (1608)
FB102		1-414-554-21	s	FERRITE, EMI (SMD) (1608)
FB201		1-414-554-21	s	FERRITE, EMI (SMD) (1608)
FB202		1-414-554-21	s	FERRITE, EMI (SMD) (1608)
FB301		1-414-554-21	s	FERRITE, EMI (SMD) (1608)
FB401		1-414-554-21	s	FERRITE, EMI (SMD) (1608)
IC1		8-759-327-01	s	IC NJM062V(TE2)
IC2		6-704-976-01	s	IC ADR381ARTZ-REEL7
IC101	※1	6-702-620-01	s	IC GS1524-CKDE3
	※2	6-709-612-01	s	IC GS1574ACNE3
IC102		6-701-084-01	s	IC MC10EP57DTR2
IC103		8-759-471-91	s	IC 74VHC04MTCX
IC201	※1	6-702-620-01	s	IC GS1524-CKDE3
	※2	6-709-612-01	s	IC GS1574ACNE3
IC202		6-701-084-01	s	IC MC10EP57DTR2
IC301	※1	6-702-620-01	s	IC GS1524-CKDE3
	※2	6-709-612-01	s	IC GS1574ACNE3
IC401	※1	6-702-620-01	s	IC GS1524-CKDE3
	※2	6-709-612-01	s	IC GS1574ACNE3
L1		1-416-344-21	s	COIL, CHOKE 10UH
L2		1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L101		1-414-461-41	s	INDUCTOR, CHIP (K) 6.8NH
L201		1-414-461-41	s	INDUCTOR, CHIP (K) 6.8NH
L301		1-414-461-41	s	INDUCTOR, CHIP (K) 6.8NH
L401		1-414-461-41	s	INDUCTOR, CHIP (K) 6.8NH
Q1		8-729-209-73	s	TRANSISTOR 2SA1213Y-TE12L
Q2		8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q3		8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q101		8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q102		8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q201		8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q202		8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
R1		1-208-871-81	s	RES, CHIP 220 (1005)
R2		1-208-871-81	s	RES, CHIP 220 (1005)
R3		1-208-871-81	s	RES, CHIP 220 (1005)
R4		1-208-907-81	s	RES, CHIP 6.8K (1005)
R5		1-208-871-81	s	RES, CHIP 220 (1005)
R6		1-208-919-81	s	RES, CHIP 22K (1005)
R7		1-208-927-81	s	RES, CHIP 47K (1005)
R8		1-208-927-81	s	RES, CHIP 47K (1005)

(SDI-85 BOARD suffix 11, 12, 31, 32)

Ref. No. or Q'ty	Part No.	SP	Description
R9	1-208-927-81	s	RES, CHIP 47K (1005)
R10	1-208-927-81	s	RES, CHIP 47K (1005)
R11	1-208-863-81	s	RES, CHIP 100 (1005)
R12	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R13	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R101	1-208-860-81	s	RES, CHIP 75 (1005)
R102	1-208-860-81	s	RES, CHIP 75 (1005)
R103	1-208-860-81	s	RES, CHIP 75 (1005)
R104	1-208-860-81	s	RES, CHIP 75 (1005)
R105	1-208-919-81	s	RES, CHIP 22K (1005)
R106	1-208-911-81	s	RES, CHIP 10K (1005)
R107	1-208-919-81	s	RES, CHIP 22K (1005)
R108	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R109	1-208-856-81	s	RES, CHIP 51 (1005)
R110	1-208-856-81	s	RES, CHIP 51 (1005)
R111	1-208-863-81	s	RES, CHIP 100 (1005)
R112	1-208-863-81	s	RES, CHIP 100 (1005)
R113	1-208-863-81	s	RES, CHIP 100 (1005)
R114	1-208-935-81	s	RES, CHIP 100K (1005)
R115	1-208-935-81	s	RES, CHIP 100K (1005)
R116	1-208-927-81	s	RES, CHIP 47K (1005)
R117	1-208-931-81	s	RES, CHIP 68K (1005)
R118	1-208-915-81	s	RES, CHIP 15K (1005)
R119	1-208-911-81	s	RES, CHIP 10K (1005)
R120	1-208-927-81	s	RES, CHIP 47K (1005)
R121	1-208-931-81	s	RES, CHIP 68K (1005)
R122	1-208-915-81	s	RES, CHIP 15K (1005)
R123	1-208-911-81	s	RES, CHIP 10K (1005)
R124	1-208-871-81	s	RES, CHIP 220 (1005)
R125	1-208-871-81	s	RES, CHIP 220 (1005)
R126	1-220-878-81	s	RES, CHIP 22 (1005)
R127	1-220-878-81	s	RES, CHIP 22 (1005)
R133	1-208-886-81	s	RES, CHIP 910 (1005)
R134	1-220-872-81	s	RES, CHIP 12 (1005)
R135	1-208-886-81	s	RES, CHIP 910 (1005)
R136 *2	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R201	1-208-860-81	s	RES, CHIP 75 (1005)
R202	1-208-860-81	s	RES, CHIP 75 (1005)
R203	1-208-860-81	s	RES, CHIP 75 (1005)
R204	1-208-860-81	s	RES, CHIP 75 (1005)
R205	1-208-919-81	s	RES, CHIP 22K (1005)
R206	1-208-911-81	s	RES, CHIP 10K (1005)
R207	1-208-919-81	s	RES, CHIP 22K (1005)
R208	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R209	1-208-856-81	s	RES, CHIP 51 (1005)
R210	1-208-856-81	s	RES, CHIP 51 (1005)
R211	1-208-863-81	s	RES, CHIP 100 (1005)
R212	1-208-863-81	s	RES, CHIP 100 (1005)
R213	1-208-863-81	s	RES, CHIP 100 (1005)
R214	1-208-935-81	s	RES, CHIP 100K (1005)
R215	1-208-935-81	s	RES, CHIP 100K (1005)
R216	1-208-927-81	s	RES, CHIP 47K (1005)
R217	1-208-931-81	s	RES, CHIP 68K (1005)
R218	1-208-915-81	s	RES, CHIP 15K (1005)
R219	1-208-911-81	s	RES, CHIP 10K (1005)
R220	1-208-927-81	s	RES, CHIP 47K (1005)
R221	1-208-931-81	s	RES, CHIP 68K (1005)
R222	1-208-915-81	s	RES, CHIP 15K (1005)
R223	1-208-911-81	s	RES, CHIP 10K (1005)

(SDI-85 BOARD suffix 11, 12, 31, 32)

Ref. No. or Q'ty	Part No.	SP	Description
R224	1-208-871-81	s	RES, CHIP 220 (1005)
R225	1-208-871-81	s	RES, CHIP 220 (1005)
R226	1-220-878-81	s	RES, CHIP 22 (1005)
R227	1-220-878-81	s	RES, CHIP 22 (1005)
R228	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R229	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R233	1-208-886-81	s	RES, CHIP 910 (1005)
R234	1-220-872-81	s	RES, CHIP 12 (1005)
R235	1-208-886-81	s	RES, CHIP 910 (1005)
R236 *2	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R301	1-208-860-81	s	RES, CHIP 75 (1005)
R302	1-208-860-81	s	RES, CHIP 75 (1005)
R303	1-208-860-81	s	RES, CHIP 75 (1005)
R304	1-208-860-81	s	RES, CHIP 75 (1005)
R305	1-208-919-81	s	RES, CHIP 22K (1005)
R306	1-208-911-81	s	RES, CHIP 10K (1005)
R307	1-208-919-81	s	RES, CHIP 22K (1005)
R308	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R309	1-208-856-81	s	RES, CHIP 51 (1005)
R310	1-208-856-81	s	RES, CHIP 51 (1005)
R311	1-208-863-81	s	RES, CHIP 100 (1005)
R333	1-208-886-81	s	RES, CHIP 910 (1005)
R334	1-220-872-81	s	RES, CHIP 12 (1005)
R335	1-208-886-81	s	RES, CHIP 910 (1005)
R336 *2	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R401	1-208-860-81	s	RES, CHIP 75 (1005)
R402	1-208-860-81	s	RES, CHIP 75 (1005)
R403	1-208-860-81	s	RES, CHIP 75 (1005)
R404	1-208-860-81	s	RES, CHIP 75 (1005)
R405	1-208-919-81	s	RES, CHIP 22K (1005)
R406	1-208-911-81	s	RES, CHIP 10K (1005)
R407	1-208-919-81	s	RES, CHIP 22K (1005)
R408	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R409	1-208-856-81	s	RES, CHIP 51 (1005)
R410	1-208-856-81	s	RES, CHIP 51 (1005)
R411	1-208-863-81	s	RES, CHIP 100 (1005)
R433	1-208-886-81	s	RES, CHIP 910 (1005)
R434	1-220-872-81	s	RES, CHIP 12 (1005)
R435	1-208-886-81	s	RES, CHIP 910 (1005)
R436 *2	1-218-990-81	s	CONDUCTOR, CHIP (1005)

SDI-86/86G BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1161-074-A	s	MOUNTED CIRCUIT BOARD, SDI-86G (GOLD)
1pc	A-1129-306-A	s	MOUNTED CIRCUIT BOARD, SDI-86 (SILVER)
4pcs	3-364-941-01	s	SCREW (+B) (2.6X5),NYLOK
C1	1-128-589-11	s	CAPACITOR ELECT 47MF/6.3V(105C
C2	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C4	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C6	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C7	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C8	1-128-589-11	s	CAPACITOR ELECT 47MF/6.3V(105C
C9	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C10	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C11	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C12	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C15	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C17	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C18	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C19	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C20	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C21	1-128-589-11	s	CAPACITOR ELECT 47MF/6.3V(105C
C22	1-128-589-11	s	CAPACITOR ELECT 47MF/6.3V(105C
C23	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C101	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C102	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C103	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C104	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C105	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C106	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C107	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C108	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C109	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C110	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C111	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C112	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C113	1-164-866-11	s	CAPACITOR,CHIP CERAMIC 47PF/50
C114	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C115	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C116	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C117	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C118	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C119	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C120	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C121	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C122	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C123	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C124	1-164-845-11	s	CAPACITOR,CERAMIC 5PF/16V(1005
C125	1-164-845-11	s	CAPACITOR,CERAMIC 5PF/16V(1005
C127	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C128	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C201	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C202	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C203	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C204	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C205	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C206	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C207	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C208	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C209	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V

(SDI-86/86G BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C210	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C211	1-164-866-11	s	CAPACITOR,CHIP CERAMIC 47PF/50
C212	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C214	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C215	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C216	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C217	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C218	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C219	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C220	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C221	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C222	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C223	1-164-845-11	s	CAPACITOR,CERAMIC 5PF/16V(1005
C224	1-164-845-11	s	CAPACITOR,CERAMIC 5PF/16V(1005
C225	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C226	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C301	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C302	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C303	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C401	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C402	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C403	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C501	1-100-620-91	s	CAPACITOR, CHIP 47MF(3225)
C502	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C503	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C505	1-164-845-11	s	CAPACITOR,CERAMIC 5PF/16V(1005
C506	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C507	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C508	1-128-589-11	s	CAPACITOR ELECT 47MF/6.3V(105C
C509	1-128-589-11	s	CAPACITOR ELECT 47MF/6.3V(105C
C510	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C511	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C601	1-100-620-91	s	CAPACITOR, CHIP 47MF(3225)
C602	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C603	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C605	1-164-845-11	s	CAPACITOR,CERAMIC 5PF/16V(1005
C606	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C607	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C608	1-128-589-11	s	CAPACITOR ELECT 47MF/6.3V(105C
C609	1-128-589-11	s	CAPACITOR ELECT 47MF/6.3V(105C
C610	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C611	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C701	1-100-620-91	s	CAPACITOR, CHIP 47MF(3225)
C702	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C703	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C801	1-100-620-91	s	CAPACITOR, CHIP 47MF(3225)
C802	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C803	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C904	1-128-589-11	s	CAPACITOR ELECT 47MF/6.3V(105C
C905	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C906	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C907	1-128-589-11	s	CAPACITOR ELECT 47MF/6.3V(105C
C908	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C909	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
CN102	1-793-324-11	o	CONNECTOR, COAXIAL (BNC TYPE)
CN103	1-793-324-11	o	CONNECTOR, COAXIAL (BNC TYPE)
CN104	1-793-324-11	o	CONNECTOR, COAXIAL (BNC TYPE)
CN105	1-793-324-11	o	CONNECTOR, COAXIAL (BNC TYPE)

(SDI-86/86G BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
CN108	1-778-647-31	s	CONNECTOR, FFC/FPC(ZIF) ST 15P (GOLD)
	1-778-647-21	o	CONNECTOR, FFC (ZIF) 15P (SILVER)
D1	8-719-017-03	s	DIODE 02DZ4.7-TPH3
D2	8-719-017-03	s	DIODE 02DZ4.7-TPH3
D101	9-910-999-30	s	HANDLED BY TOKYO PROD.GP
D102	9-910-999-30	s	HANDLED BY TOKYO PROD.GP
D103	9-910-999-30	s	HANDLED BY TOKYO PROD.GP
D201	9-910-999-30	s	HANDLED BY TOKYO PROD.GP
D202	9-910-999-30	s	HANDLED BY TOKYO PROD.GP
D203	9-910-999-30	s	HANDLED BY TOKYO PROD.GP
D301	9-910-999-30	s	HANDLED BY TOKYO PROD.GP
D302	9-910-999-30	s	HANDLED BY TOKYO PROD.GP
D303	9-910-999-30	s	HANDLED BY TOKYO PROD.GP
D401	9-910-999-30	s	HANDLED BY TOKYO PROD.GP
D402	9-910-999-30	s	HANDLED BY TOKYO PROD.GP
D403	9-910-999-30	s	HANDLED BY TOKYO PROD.GP
E1	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
E2	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
FB101	1-414-554-21	s	FERRITE, EMI(SMD)
FB102	1-414-554-21	s	FERRITE, EMI(SMD)
FB103	1-414-554-21	s	FERRITE, EMI(SMD)
FB201	1-414-554-21	s	FERRITE, EMI(SMD)
FB202	1-414-554-21	s	FERRITE, EMI(SMD)
FB203	1-414-554-21	s	FERRITE, EMI(SMD)
FB301	1-414-554-21	s	FERRITE, EMI(SMD)
FB302	1-414-554-21	s	FERRITE, EMI(SMD)
FB401	1-414-554-21	s	FERRITE, EMI(SMD)
FB402	1-414-554-21	s	FERRITE, EMI(SMD)
IC1	8-759-327-01	s	IC NJM062V-TE2
IC2	8-759-327-01	s	IC NJM062V-TE2
IC3	6-704-976-01	s	IC ADR381ART-REEL7
IC4	8-759-338-95	s	IC NJM2903V (TE2)
IC101	8-752-080-61	s	IC CXB1340N
IC102	8-759-523-02	s	IC TC74HC4053AFT(EL)
IC201	8-752-080-61	s	IC CXB1340N
IC202	8-759-523-02	s	IC TC74HC4053AFT(EL)
IC501	8-759-561-46	s	IC AD8014ART-REEL7
IC502	8-759-523-02	s	IC TC74HC4053AFT(EL)
IC601	8-759-561-46	s	IC AD8014ART-REEL7
IC602	8-759-523-02	s	IC TC74HC4053AFT(EL)
IC902	8-759-561-46	s	IC AD8014ART-REEL7
IC903	8-759-561-46	s	IC AD8014ART-REEL7
L1	1-416-344-11	s	COIL, CHOKE 10UH
L2	1-414-398-11	s	INDUCTOR (SMD) 10UH
L3	1-414-398-11	s	INDUCTOR (SMD) 10UH
L101	1-414-465-31	s	INDUCTOR, CHIP (J) 15NH
L102	1-414-398-11	s	INDUCTOR (SMD) 10UH
L103	1-414-398-11	s	INDUCTOR (SMD) 10UH
L201	1-414-465-31	s	INDUCTOR, CHIP (J) 15NH
L203	1-414-398-11	s	INDUCTOR (SMD) 10UH
L204	1-414-398-11	s	INDUCTOR (SMD) 10UH
L301	1-414-465-31	s	INDUCTOR, CHIP (J) 15NH
L401	1-414-465-31	s	INDUCTOR, CHIP (J) 15NH
L501	1-414-398-11	s	INDUCTOR (SMD) 10UH
L502	1-414-398-11	s	INDUCTOR (SMD) 10UH
L601	1-414-398-11	s	INDUCTOR (SMD) 10UH

(SDI-86/86G BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
L602	1-414-398-11	s	INDUCTOR (SMD) 10UH
L901	1-414-398-11	s	INDUCTOR (SMD) 10UH
L902	1-414-398-11	s	INDUCTOR (SMD) 10UH
Q1	8-729-230-27	s	TRANSISTOR 2SA1213Y-TE12L
Q2	8-729-927-99	s	TRANSISTOR 2SC4617R
Q3	8-729-230-27	s	TRANSISTOR 2SA1213Y-TE12L
Q4	8-729-807-51	s	TRANSISTOR 2SD1623-S
Q5	8-729-927-99	s	TRANSISTOR 2SC4617R
Q101	8-729-105-68	s	TRANSISTOR 2SC3356-K
Q102	8-729-927-99	s	TRANSISTOR 2SC4617R
Q103	8-729-927-99	s	TRANSISTOR 2SC4617R
Q104	8-729-105-68	s	TRANSISTOR 2SC3356-K
Q201	8-729-105-68	s	TRANSISTOR 2SC3356-K
Q202	8-729-927-99	s	TRANSISTOR 2SC4617R
Q203	8-729-927-99	s	TRANSISTOR 2SC4617R
Q204	8-729-105-68	s	TRANSISTOR 2SC3356-K
Q301	8-729-105-68	s	TRANSISTOR 2SC3356-K
Q302	8-729-927-99	s	TRANSISTOR 2SC4617R
Q303	8-729-927-99	s	TRANSISTOR 2SC4617R
Q401	8-729-105-68	s	TRANSISTOR 2SC3356-K
Q402	8-729-927-99	s	TRANSISTOR 2SC4617R
Q403	8-729-927-99	s	TRANSISTOR 2SC4617R
Q501	8-729-927-99	s	TRANSISTOR 2SC4617R
Q502	8-729-927-99	s	TRANSISTOR 2SC4617R
Q503	8-729-928-19	s	TRANSISTOR 2SA1774R
Q504	8-729-928-19	s	TRANSISTOR 2SA1774R
Q505	8-729-928-19	s	TRANSISTOR 2SA1774R
Q506	8-729-928-19	s	TRANSISTOR 2SA1774R
Q507	8-729-928-27	s	TRANSISTOR DTA144EE
Q508	8-729-928-81	s	TRANSISTOR DTC144EE
Q509	8-729-928-27	s	TRANSISTOR DTA144EE
Q510	8-729-928-81	s	TRANSISTOR DTC144EE
Q511	8-729-927-99	s	TRANSISTOR 2SC4617R
Q512	8-729-927-99	s	TRANSISTOR 2SC4617R
Q513	8-729-927-99	s	TRANSISTOR 2SC4617R
Q514	8-729-927-99	s	TRANSISTOR 2SC4617R
Q601	8-729-927-99	s	TRANSISTOR 2SC4617R
Q602	8-729-927-99	s	TRANSISTOR 2SC4617R
Q603	8-729-928-19	s	TRANSISTOR 2SA1774R
Q604	8-729-928-19	s	TRANSISTOR 2SA1774R
Q605	8-729-928-19	s	TRANSISTOR 2SA1774R
Q606	8-729-928-19	s	TRANSISTOR 2SA1774R
Q607	8-729-928-27	s	TRANSISTOR DTA144EE
Q608	8-729-928-81	s	TRANSISTOR DTC144EE
Q609	8-729-928-27	s	TRANSISTOR DTA144EE
Q610	8-729-928-81	s	TRANSISTOR DTC144EE
Q611	8-729-927-99	s	TRANSISTOR 2SC4617R
Q612	8-729-927-99	s	TRANSISTOR 2SC4617R
Q613	8-729-927-99	s	TRANSISTOR 2SC4617R
Q614	8-729-927-99	s	TRANSISTOR 2SC4617R
Q701	8-729-927-99	s	TRANSISTOR 2SC4617R
Q702	8-729-927-99	s	TRANSISTOR 2SC4617R
Q703	8-729-928-19	s	TRANSISTOR 2SA1774R
Q704	8-729-928-19	s	TRANSISTOR 2SA1774R
Q705	8-729-928-19	s	TRANSISTOR 2SA1774R
Q706	8-729-928-19	s	TRANSISTOR 2SA1774R
Q707	8-729-928-27	s	TRANSISTOR DTA144EE
Q708	8-729-928-81	s	TRANSISTOR DTC144EE
Q709	8-729-928-27	s	TRANSISTOR DTA144EE

(SDI-86/86G BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
Q710	8-729-928-81	s	TRANSISTOR DTC144EE
Q801	8-729-927-99	s	TRANSISTOR 2SC4617R
Q802	8-729-927-99	s	TRANSISTOR 2SC4617R
Q803	8-729-928-19	s	TRANSISTOR 2SA1774R
Q804	8-729-928-19	s	TRANSISTOR 2SA1774R
Q805	8-729-928-19	s	TRANSISTOR 2SA1774R
Q806	8-729-928-19	s	TRANSISTOR 2SA1774R
Q807	8-729-928-27	s	TRANSISTOR DTA144EE
Q808	8-729-928-81	s	TRANSISTOR DTC144EE
Q809	8-729-928-27	s	TRANSISTOR DTA144EE
Q810	8-729-928-81	s	TRANSISTOR DTC144EE
R1	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R2	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R3	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R4	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R5	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R6	1-208-931-11	s	RESISTOR, CHIP 68K (1005)
R7	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R8	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R9	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R10	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R11	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R12	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R13	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R14	1-208-931-11	s	RESISTOR, CHIP 68K (1005)
R15	1-208-931-11	s	RESISTOR, CHIP 68K (1005)
R16	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R17	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R18	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R19	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R20	1-208-703-11	s	RESISTOR,CHIP 6.8K 1/16W(1005)
R21	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R22	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R23	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R24	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R25	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R26	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R27	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R28	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R29	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R30	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R101	1-208-860-11	s	RESISTOR CHIP 75 1/16W (1005)
R102	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R103	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R104	1-208-679-11	s	RESISTOR CHIP 680 1/16W (1005)
R105	1-208-679-11	s	RESISTOR CHIP 680 1/16W (1005)
R106	1-208-679-11	s	RESISTOR CHIP 680 1/16W (1005)
R107	1-208-679-11	s	RESISTOR CHIP 680 1/16W (1005)
R108	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R109	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R110	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R111	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R112	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R113	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R114	1-208-679-11	s	RESISTOR CHIP 680 1/16W (1005)
R115	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R116	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)

(SDI-86/86G BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R117	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R118	1-208-647-11	s	RESISTOR CHIP 33 1/16W (1005)
R119	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R120	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R121	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R122	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R123	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R124	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R125	1-208-860-11	s	RESISTOR CHIP 75 1/16W (1005)
R126	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R127	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R128	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R129	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R130	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R131	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R132	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R136	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R137	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R138	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R139	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R201	1-208-860-11	s	RESISTOR CHIP 75 1/16W (1005)
R202	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R203	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R204	1-208-679-11	s	RESISTOR CHIP 680 1/16W (1005)
R205	1-208-679-11	s	RESISTOR CHIP 680 1/16W (1005)
R206	1-208-679-11	s	RESISTOR CHIP 680 1/16W (1005)
R207	1-208-679-11	s	RESISTOR CHIP 680 1/16W (1005)
R208	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R209	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R210	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R211	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R212	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R213	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R214	1-208-679-11	s	RESISTOR CHIP 680 1/16W (1005)
R215	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R216	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R217	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R218	1-208-647-11	s	RESISTOR CHIP 33 1/16W (1005)
R219	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R220	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R221	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R222	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R223	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R224	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R225	1-208-860-11	s	RESISTOR CHIP 75 1/16W (1005)
R226	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R227	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R228	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R229	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R230	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R231	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R232	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R233	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R234	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R301	1-208-860-11	s	RESISTOR CHIP 75 1/16W (1005)
R302	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R303	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R304	1-208-679-11	s	RESISTOR CHIP 680 1/16W (1005)
R305	1-208-679-11	s	RESISTOR CHIP 680 1/16W (1005)

(SDI-86/86G BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R306	1-208-679-11	s	RESISTOR CHIP 680 1/16W (1005)
R307	1-208-679-11	s	RESISTOR CHIP 680 1/16W (1005)
R308	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R309	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R310	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R311	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R312	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R313	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R401	1-208-860-11	s	RESISTOR CHIP 75 1/16W (1005)
R402	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R403	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R404	1-208-679-11	s	RESISTOR CHIP 680 1/16W (1005)
R405	1-208-679-11	s	RESISTOR CHIP 680 1/16W (1005)
R406	1-208-679-11	s	RESISTOR CHIP 680 1/16W (1005)
R407	1-208-679-11	s	RESISTOR CHIP 680 1/16W (1005)
R408	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R409	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R410	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R411	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R412	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R413	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R501	1-208-663-11	s	RESISTOR CHIP 150 1/16W (1005)
R502	1-208-663-11	s	RESISTOR CHIP 150 1/16W (1005)
R503	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R504	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R505	1-208-943-11	s	RESISTOR CHIP 220K
R506	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R507	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R508	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R509	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R510	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R511	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R512	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R513	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R514	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R515	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R516	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R517	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R518	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R519	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R520	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R521	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R522	1-208-679-11	s	RESISTOR CHIP 680 1/16W (1005)
R523	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005
R524	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R525	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R526	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R527	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R528	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R529	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R530	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R601	1-208-663-11	s	RESISTOR CHIP 150 1/16W (1005)
R602	1-208-663-11	s	RESISTOR CHIP 150 1/16W (1005)
R603	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R604	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R605	1-208-943-11	s	RESISTOR CHIP 220K
R606	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R607	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R608	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)

(SDI-86/86G BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R609	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R610	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R611	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R612	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R613	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R614	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R615	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R616	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R617	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R618	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R619	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R620	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R621	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R622	1-208-679-11	s	RESISTOR CHIP 680 1/16W (1005)
R623	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005
R624	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R625	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R626	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R627	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R628	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R629	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R630	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R701	1-208-663-11	s	RESISTOR CHIP 150 1/16W (1005)
R702	1-208-663-11	s	RESISTOR CHIP 150 1/16W (1005)
R703	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R704	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R705	1-208-943-11	s	RESISTOR CHIP 220K
R706	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R707	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R708	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R709	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R710	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R711	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R712	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R713	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R801	1-208-663-11	s	RESISTOR CHIP 150 1/16W (1005)
R802	1-208-663-11	s	RESISTOR CHIP 150 1/16W (1005)
R803	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R804	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R805	1-208-943-11	s	RESISTOR CHIP 220K
R806	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R807	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R808	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R809	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R810	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R811	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R812	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R813	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R913	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R914	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R915	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R916	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R917	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R918	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R919	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R920	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R921	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R922	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)

SDI-87G BOARD (suffix 12, 32)

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1161-084-A	s	MOUNTED CIRCUIT BOARD, SDI-87G
3pcs	3-364-941-01	s	SCREW (+B) (2.6X5), NYLOK
C1	1-128-589-21	s	CAP, CHIP ELECT 47MF
C2	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C4	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C6	1-126-394-21	s	CAP, CHIP ELECT 10MF (4X5.7)
C7	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C8	1-128-589-21	s	CAP, CHIP ELECT 47MF
C9	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C10	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C11	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C12	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C15	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C17	1-126-394-21	s	CAP, CHIP ELECT 10MF (4X5.7)
C18	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C19	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C20	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C21	1-128-589-21	s	CAP, CHIP ELECT 47MF
C22	1-128-589-21	s	CAP, CHIP ELECT 47MF
C23	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C24	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C25	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C101	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C102	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C103	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C104	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C105	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C106	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C107	1-112-324-91	s	CAP, CERAMIC 0.47MF C (1005)
C108	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C109	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C110	1-127-760-91	s	CAP, CHIP CERAMIC 4.7MF B 2012
C111	1-127-760-91	s	CAP, CHIP CERAMIC 4.7MF B 2012
C112	1-100-620-91	s	CAP, CHIP CERAMIC 47MF B(3225)
C113	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C114	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C115	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C116	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C117	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C118	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C119	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C120	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C121	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C122	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C123	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C124	1-112-324-91	s	CAP, CERAMIC 0.47MF C (1005)
C201	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C202	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C203	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C204	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C205	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C206	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C207	1-112-324-91	s	CAP, CERAMIC 0.47MF C (1005)
C208	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C209	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C210	1-127-760-91	s	CAP, CHIP CERAMIC 4.7MF B 2012
C211	1-127-760-91	s	CAP, CHIP CERAMIC 4.7MF B 2012
C212	1-100-620-91	s	CAP, CHIP CERAMIC 47MF B(3225)

(SDI-87G BOARD suffix 12, 32)

Ref. No. or Q'ty	Part No.	SP	Description
C213	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C214	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C215	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C216	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C217	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C218	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C224	1-112-324-91	s	CAP, CERAMIC 0.47MF C (1005)
C303	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C304	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C305	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C306	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C307	1-112-324-91	s	CAP, CERAMIC 0.47MF C (1005)
C308	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C309	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C310	1-127-760-91	s	CAP, CHIP CERAMIC 4.7MF B 2012
C311	1-127-760-91	s	CAP, CHIP CERAMIC 4.7MF B 2012
C312	1-100-620-91	s	CAP, CHIP CERAMIC 47MF B(3225)
C313	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C314	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C315	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C316	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C319	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C320	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C321	1-128-589-21	s	CAP, CHIP ELECT 47MF
C322	1-128-589-21	s	CAP, CHIP ELECT 47MF
C324	1-112-324-91	s	CAP, CERAMIC 0.47MF C (1005)
C401	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C402	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C403	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C404	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C501	1-128-589-21	s	CAP, CHIP ELECT 47MF
C502	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C503	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C504	1-128-589-21	s	CAP, CHIP ELECT 47MF
C505	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C506	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
CN102	1-793-324-11	o	CONNECTOR, COAXIAL (BNC TYPE)
CN103	1-793-324-11	o	CONNECTOR, COAXIAL (BNC TYPE)
CN104	1-793-324-11	o	CONNECTOR, COAXIAL (BNC TYPE)
CN105	1-778-647-31	s	CONNECTOR, FFC/FPC(ZIF) ST 15P
D1	8-719-017-03	s	DIODE 02DZ4.7-TPH3
D2	8-719-017-03	s	DIODE 02DZ4.7-TPH3
D3	8-719-017-03	s	DIODE 02DZ4.7-TPH3
D4	8-719-017-03	s	DIODE 02DZ4.7-TPH3
E1	1-535-877-22	s	CHIP, CHECKER
E2	1-535-877-22	s	CHIP, CHECKER
FB101	1-414-554-21	s	FERRITE, EMI (SMD) (1608)
FB102	1-414-554-21	s	FERRITE, EMI (SMD) (1608)
FB201	1-414-554-21	s	FERRITE, EMI (SMD) (1608)
FB202	1-414-554-21	s	FERRITE, EMI (SMD) (1608)
FB301	1-414-554-21	s	FERRITE, EMI (SMD) (1608)
IC1	8-759-327-01	s	IC NJM062V(TE2)
IC2	8-759-327-01	s	IC NJM062V(TE2)
IC3	6-704-976-01	s	IC ADR381ARTZ-REEL7
IC4	8-759-338-95	s	IC NJM2903V(TE2)
IC5	8-759-338-95	s	IC NJM2903V(TE2)
IC101	6-702-578-01	s	IC MSW-2-20+-TR

(SDI-87G BOARD suffix 12, 32)

Ref. No. or Q'ty	Part No.	SP	Description
IC102	6-709-612-01	s	IC GS1574ACNE3
IC103	6-701-084-01	s	IC MC10EP57DTR2
IC201	6-702-578-01	s	IC MSW-2-20+-TR
IC202	6-709-612-01	s	IC GS1574ACNE3
IC203	6-701-084-01	s	IC MC10EP57DTR2
IC301	6-702-578-01	s	IC MSW-2-20+-TR
IC302	6-709-612-01	s	IC GS1574ACNE3
IC303	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC401	8-759-471-85	s	IC 74VHC00MTCX
IC402	8-759-471-85	s	IC 74VHC00MTCX
IC403	8-759-471-96	s	IC 74VHC08MTCX
IC404	6-706-482-01	s	IC TC7SH00FU(T5RSOYJF)
IC405	6-706-483-01	s	IC TC7SH02FU(T5RSOYJF)
IC406	6-706-489-01	s	IC TC7SH32FU(T5RSOYJF)
IC501	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC502	8-759-561-46	s	IC AD8014ARTZ-REEL7
L1	1-416-344-21	s	COIL, CHOKE 10UH
L2	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L3	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L4	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L101	1-414-461-41	s	INDUCTOR, CHIP (K) 6.8NH
L201	1-414-461-41	s	INDUCTOR, CHIP (K) 6.8NH
L301	1-414-461-41	s	INDUCTOR, CHIP (K) 6.8NH
L303	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L304	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L501	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L502	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
Q1	8-729-209-73	s	TRANSISTOR 2SA1213Y-TE12L
Q2	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q3	8-729-209-73	s	TRANSISTOR 2SA1213Y-TE12L
Q4	8-729-209-77	s	TRANSISTOR 2SC2873Y-TE12L
Q5	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q6	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q103	8-729-046-30	s	TRANSISTOR 2SC5245-4/5-TL-E
Q104	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q105	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q106	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q107	8-729-821-90	s	TRANSISTOR 2SK1332-3-TL-E
Q108	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q109	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q110	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q111	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q112	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q113	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q114	8-729-041-23	s	TRANSISTOR NDS356AP
Q203	8-729-046-30	s	TRANSISTOR 2SC5245-4/5-TL-E
Q204	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q205	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q206	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q207	8-729-821-90	s	TRANSISTOR 2SK1332-3-TL-E
Q208	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q209	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q210	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q211	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q303	8-729-046-30	s	TRANSISTOR 2SC5245-4/5-TL-E
Q304	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q305	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR

(SDI-87G BOARD suffix 12, 32)

Ref. No. or Q'ty	Part No.	SP	Description
Q306	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q307	8-729-821-90	s	TRANSISTOR 2SK1332-3-TL-E
Q308	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q309	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q401	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q402	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q403	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q404	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q405	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q406	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q407	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q408	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q409	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q410	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q411	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q412	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q413	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q414	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q415	8-729-041-23	s	TRANSISTOR NDS356AP
R1	1-208-871-81	s	RES, CHIP 220 (1005)
R2	1-208-871-81	s	RES, CHIP 220 (1005)
R3	1-208-871-81	s	RES, CHIP 220 (1005)
R4	1-208-923-81	s	RES, CHIP 33K (1005)
R5	1-208-923-81	s	RES, CHIP 33K (1005)
R6	1-208-931-81	s	RES, CHIP 68K (1005)
R7	1-208-879-81	s	RES, CHIP 470 (1005)
R8	1-208-923-81	s	RES, CHIP 33K (1005)
R9	1-208-871-81	s	RES, CHIP 220 (1005)
R10	1-208-871-81	s	RES, CHIP 220 (1005)
R11	1-208-923-81	s	RES, CHIP 33K (1005)
R12	1-208-927-81	s	RES, CHIP 47K (1005)
R13	1-208-923-81	s	RES, CHIP 33K (1005)
R14	1-208-931-81	s	RES, CHIP 68K (1005)
R15	1-208-931-81	s	RES, CHIP 68K (1005)
R16	1-208-903-81	s	RES, CHIP 4.7K (1005)
R18	1-208-895-81	s	RES, CHIP 2.2K (1005)
R19	1-208-935-81	s	RES, CHIP 100K (1005)
R20	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R21	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R22	1-208-923-81	s	RES, CHIP 33K (1005)
R23	1-208-895-81	s	RES, CHIP 2.2K (1005)
R24	1-208-915-81	s	RES, CHIP 15K (1005)
R25	1-208-919-81	s	RES, CHIP 22K (1005)
R26	1-208-907-81	s	RES, CHIP 6.8K (1005)
R27	1-208-927-81	s	RES, CHIP 47K (1005)
R28	1-208-911-81	s	RES, CHIP 10K (1005)
R29	1-208-895-81	s	RES, CHIP 2.2K (1005)
R30	1-208-915-81	s	RES, CHIP 15K (1005)
R31	1-208-923-81	s	RES, CHIP 33K (1005)
R32	1-208-931-81	s	RES, CHIP 68K (1005)
R33	1-208-903-81	s	RES, CHIP 4.7K (1005)
R34	1-208-895-81	s	RES, CHIP 2.2K (1005)
R35	1-208-911-81	s	RES, CHIP 10K (1005)
R36	1-208-911-81	s	RES, CHIP 10K (1005)
R37	1-208-863-81	s	RES, CHIP 100 (1005)
R101	1-208-860-81	s	RES, CHIP 75 (1005)
R102	1-208-860-81	s	RES, CHIP 75 (1005)
R104	1-208-860-81	s	RES, CHIP 75 (1005)
R105	1-208-860-81	s	RES, CHIP 75 (1005)

(SDI-87G BOARD suffix 12, 32)

Ref. No. or Q'ty	Part No.	SP	Description
R106	1-208-919-81	s	RES, CHIP 22K (1005)
R107	1-208-911-81	s	RES, CHIP 10K (1005)
R108	1-208-919-81	s	RES, CHIP 22K (1005)
R109	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R111	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R112	1-208-935-81	s	RES, CHIP 100K (1005)
R114	1-208-867-81	s	RES, CHIP 150 (1005)
R115	1-208-867-81	s	RES, CHIP 150 (1005)
R116	1-208-863-81	s	RES, CHIP 100 (1005)
R117	1-208-899-81	s	RES, CHIP 3.3K (1005)
R118	1-208-943-81	s	RES, CHIP 220K (1005)
R119	1-208-899-81	s	RES, CHIP 3.3K (1005)
R120	1-208-911-81	s	RES, CHIP 10K (1005)
R121	1-208-927-81	s	RES, CHIP 47K (1005)
R122	1-208-915-81	s	RES, CHIP 15K (1005)
R123	1-208-911-81	s	RES, CHIP 10K (1005)
R124	1-208-856-81	s	RES, CHIP 51 (1005)
R125	1-208-856-81	s	RES, CHIP 51 (1005)
R126	1-208-863-81	s	RES, CHIP 100 (1005)
R127	1-208-856-81	s	RES, CHIP 51 (1005)
R128	1-208-856-81	s	RES, CHIP 51 (1005)
R129	1-208-863-81	s	RES, CHIP 100 (1005)
R130	1-208-856-81	s	RES, CHIP 51 (1005)
R131	1-208-856-81	s	RES, CHIP 51 (1005)
R132	1-208-863-81	s	RES, CHIP 100 (1005)
R133	1-208-899-81	s	RES, CHIP 3.3K (1005)
R134	1-208-903-81	s	RES, CHIP 4.7K (1005)
R135	1-208-899-81	s	RES, CHIP 3.3K (1005)
R136	1-208-935-81	s	RES, CHIP 100K (1005)
R137	1-208-911-81	s	RES, CHIP 10K (1005)
R138	1-208-871-81	s	RES, CHIP 220 (1005)
R139	1-208-871-81	s	RES, CHIP 220 (1005)
R140	1-220-878-81	s	RES, CHIP 22 (1005)
R141	1-220-878-81	s	RES, CHIP 22 (1005)
R142	1-208-927-81	s	RES, CHIP 47K (1005)
R143	1-208-931-81	s	RES, CHIP 68K (1005)
R144	1-208-915-81	s	RES, CHIP 15K (1005)
R145	1-208-911-81	s	RES, CHIP 10K (1005)
R146	1-208-927-81	s	RES, CHIP 47K (1005)
R147	1-208-931-81	s	RES, CHIP 68K (1005)
R148	1-208-915-81	s	RES, CHIP 15K (1005)
R149	1-208-911-81	s	RES, CHIP 10K (1005)
R150	1-208-891-81	s	RES, CHIP 1.5K (1005)
R151	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R152	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R153	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R201	1-208-860-81	s	RES, CHIP 75 (1005)
R202	1-208-860-81	s	RES, CHIP 75 (1005)
R204	1-208-860-81	s	RES, CHIP 75 (1005)
R205	1-208-860-81	s	RES, CHIP 75 (1005)
R206	1-208-919-81	s	RES, CHIP 22K (1005)
R207	1-208-911-81	s	RES, CHIP 10K (1005)
R208	1-208-919-81	s	RES, CHIP 22K (1005)
R209	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R211	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R212	1-208-935-81	s	RES, CHIP 100K (1005)
R214	1-208-867-81	s	RES, CHIP 150 (1005)
R215	1-208-867-81	s	RES, CHIP 150 (1005)
R216	1-208-863-81	s	RES, CHIP 100 (1005)

(SDI-87G BOARD suffix 12, 32)

Ref. No. or Q'ty	Part No.	SP	Description
R217	1-208-899-81	s	RES, CHIP 3.3K (1005)
R218	1-208-943-81	s	RES, CHIP 220K (1005)
R219	1-208-899-81	s	RES, CHIP 3.3K (1005)
R220	1-208-911-81	s	RES, CHIP 10K (1005)
R221	1-208-927-81	s	RES, CHIP 47K (1005)
R222	1-208-915-81	s	RES, CHIP 15K (1005)
R223	1-208-911-81	s	RES, CHIP 10K (1005)
R224	1-208-875-81	s	RES, CHIP 330 (1005)
R225	1-208-875-81	s	RES, CHIP 330 (1005)
R226	1-220-878-81	s	RES, CHIP 22 (1005)
R227	1-220-878-81	s	RES, CHIP 22 (1005)
R228	1-208-927-81	s	RES, CHIP 47K (1005)
R229	1-208-931-81	s	RES, CHIP 68K (1005)
R230	1-208-915-81	s	RES, CHIP 15K (1005)
R231	1-208-911-81	s	RES, CHIP 10K (1005)
R232	1-208-927-81	s	RES, CHIP 47K (1005)
R233	1-208-931-81	s	RES, CHIP 68K (1005)
R234	1-208-915-81	s	RES, CHIP 15K (1005)
R235	1-208-911-81	s	RES, CHIP 10K (1005)
R250	1-208-891-81	s	RES, CHIP 1.5K (1005)
R301	1-208-860-81	s	RES, CHIP 75 (1005)
R302	1-208-860-81	s	RES, CHIP 75 (1005)
R304	1-208-860-81	s	RES, CHIP 75 (1005)
R305	1-208-860-81	s	RES, CHIP 75 (1005)
R306	1-208-919-81	s	RES, CHIP 22K (1005)
R307	1-208-911-81	s	RES, CHIP 10K (1005)
R308	1-208-919-81	s	RES, CHIP 22K (1005)
R309	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R311	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R312	1-208-935-81	s	RES, CHIP 100K (1005)
R314	1-208-867-81	s	RES, CHIP 150 (1005)
R315	1-208-867-81	s	RES, CHIP 150 (1005)
R316	1-208-863-81	s	RES, CHIP 100 (1005)
R317	1-208-899-81	s	RES, CHIP 3.3K (1005)
R318	1-208-943-81	s	RES, CHIP 220K (1005)
R319	1-208-899-81	s	RES, CHIP 3.3K (1005)
R320	1-208-911-81	s	RES, CHIP 10K (1005)
R321	1-208-927-81	s	RES, CHIP 47K (1005)
R322	1-208-915-81	s	RES, CHIP 15K (1005)
R323	1-208-911-81	s	RES, CHIP 10K (1005)
R325	1-208-863-81	s	RES, CHIP 100 (1005)
R326	1-208-863-81	s	RES, CHIP 100 (1005)
R327	1-208-863-81	s	RES, CHIP 100 (1005)
R328	1-208-907-81	s	RES, CHIP 6.8K (1005)
R329	1-208-887-81	s	RES, CHIP 1.0K (1005)
R330	1-208-911-81	s	RES, CHIP 10K (1005)
R331	1-208-887-81	s	RES, CHIP 1.0K (1005)
R332	1-208-887-81	s	RES, CHIP 1.0K (1005)
R333	1-208-855-81	s	RES, CHIP 47 (1005)
R334	1-208-875-81	s	RES, CHIP 330 (1005)
R350	1-208-891-81	s	RES, CHIP 1.5K (1005)
R401	1-208-927-81	s	RES, CHIP 47K (1005)
R402	1-208-919-81	s	RES, CHIP 22K (1005)
R403	1-208-927-81	s	RES, CHIP 47K (1005)
R404	1-208-919-81	s	RES, CHIP 22K (1005)
R405	1-208-927-81	s	RES, CHIP 47K (1005)
R406	1-208-919-81	s	RES, CHIP 22K (1005)
R407	1-208-863-81	s	RES, CHIP 100 (1005)
R408	1-208-863-81	s	RES, CHIP 100 (1005)

(SDI-87G BOARD suffix 12, 32)

Ref. No. or Q'ty	Part No.	SP	Description
R409	1-208-935-81	s	RES, CHIP 100K (1005)
R410	1-208-935-81	s	RES, CHIP 100K (1005)
R411	1-208-863-81	s	RES, CHIP 100 (1005)
R412	1-208-863-81	s	RES, CHIP 100 (1005)
R413	1-208-863-81	s	RES, CHIP 100 (1005)
R414	1-208-863-81	s	RES, CHIP 100 (1005)
R415	1-208-935-81	s	RES, CHIP 100K (1005)
R416	1-208-935-81	s	RES, CHIP 100K (1005)
R417	1-208-935-81	s	RES, CHIP 100K (1005)
R418	1-208-911-81	s	RES, CHIP 10K (1005)
R501	1-208-863-81	s	RES, CHIP 100 (1005)
R502	1-208-923-81	s	RES, CHIP 33K (1005)
R503	1-208-887-81	s	RES, CHIP 1.0K (1005)
R504	1-208-887-81	s	RES, CHIP 1.0K (1005)
R505	1-208-863-81	s	RES, CHIP 100 (1005)
R506	1-208-923-81	s	RES, CHIP 33K (1005)
R507	1-208-875-81	s	RES, CHIP 330 (1005)
R508	1-208-887-81	s	RES, CHIP 1.0K (1005)
R509	1-208-887-81	s	RES, CHIP 1.0K (1005)
R510	1-208-875-81	s	RES, CHIP 330 (1005)

SDI-87/87G BOARD (suffix 11)

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1161-084-A	s	MOUNTED CIRCUIT BOARD, SDI-87G (GOLD)
1pc	A-1129-309-A	s	MOUNTED CIRCUIT BOARD, SDI-87 (SILVER)
3pcs	3-364-941-01	s	SCREW (+B) (2.6X5),NYLOK
1pc	3-990-798-11	s	LABEL,SERVICE PARTS-NO
C1	1-128-589-11	s	CAPACITOR ELECT 47MF/6.3V(105C
C2	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C4	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C6	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C7	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C8	1-128-589-11	s	CAPACITOR ELECT 47MF/6.3V(105C
C9	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C10	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C11	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C12	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C15	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C17	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C18	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C19	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C20	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C21	1-128-589-11	s	CAPACITOR ELECT 47MF/6.3V(105C
C22	1-128-589-11	s	CAPACITOR ELECT 47MF/6.3V(105C
C23	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C24	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C25	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C101	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C102	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C103	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C104	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C105	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C106	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C107	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C108	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C109	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C110	1-127-760-11	s	CAPACITOR,CERAMIC 4.7MF/6.3V
C111	1-127-760-11	s	CAPACITOR,CERAMIC 4.7MF/6.3V
C112	1-100-620-91	s	CAPACITOR, CHIP 47MF(3225)
C113	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C114	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C115	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C116	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C117	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C118	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C119	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C120	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C121	1-164-845-11	s	CAPACITOR,CERAMIC 5PF/16V(1005
C122	1-164-845-11	s	CAPACITOR,CERAMIC 5PF/16V(1005
C123	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C201	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C202	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C203	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C204	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C205	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C206	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C207	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C208	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C209	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C210	1-127-760-11	s	CAPACITOR,CERAMIC 4.7MF/6.3V

(SDI-87/87G BOARD suffix 11)

Ref. No. or Q'ty	Part No.	SP	Description
C211	1-127-760-11	s	CAPACITOR,CERAMIC 4.7MF/6.3V
C212	1-100-620-91	s	CAPACITOR, CHIP 47MF(3225)
C213	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C214	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C215	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C216	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C217	1-164-845-11	s	CAPACITOR,CERAMIC 5PF/16V(1005
C218	1-164-845-11	s	CAPACITOR,CERAMIC 5PF/16V(1005
C303	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C304	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C305	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C306	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C307	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C308	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C309	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C310	1-127-760-11	s	CAPACITOR,CERAMIC 4.7MF/6.3V
C311	1-127-760-11	s	CAPACITOR,CERAMIC 4.7MF/6.3V
C312	1-100-620-91	s	CAPACITOR, CHIP 47MF(3225)
C313	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C314	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C315	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C316	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C319	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C320	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C321	1-128-589-11	s	CAPACITOR ELECT 47MF/6.3V(105C
C322	1-128-589-11	s	CAPACITOR ELECT 47MF/6.3V(105C
C401	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C402	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C403	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C404	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C501	1-128-589-11	s	CAPACITOR ELECT 47MF/6.3V(105C
C502	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C503	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C504	1-128-589-11	s	CAPACITOR ELECT 47MF/6.3V(105C
C505	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C506	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
CN102	1-793-324-11	o	CONNECTOR, COAXIAL (BNC TYPE)
CN103	1-793-324-11	o	CONNECTOR, COAXIAL (BNC TYPE)
CN104	1-793-324-11	o	CONNECTOR, COAXIAL (BNC TYPE)
CN105	1-778-647-31	s	CONNECTOR, FFC/FPC(ZIF) ST 15P (GOLD)
	1-778-647-21	o	CONNECTOR, FFC (ZIF) 15P (SILVER)
D1	8-719-017-03	s	DIODE 02DZ4.7-TPH3
D2	8-719-017-03	s	DIODE 02DZ4.7-TPH3
D3	8-719-017-03	s	DIODE 02DZ4.7-TPH3
D4	8-719-017-03	s	DIODE 02DZ4.7-TPH3
E1	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
E2	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
FB101	1-414-554-21	s	FERRITE, EMI(SMD)
FB102	1-414-554-21	s	FERRITE, EMI(SMD)
FB201	1-414-554-21	s	FERRITE, EMI(SMD)
FB202	1-414-554-21	s	FERRITE, EMI(SMD)
FB301	1-414-554-21	s	FERRITE, EMI(SMD)
IC1	8-759-327-01	s	IC NJM062V-TE2
IC2	8-759-327-01	s	IC NJM062V-TE2
IC3	6-704-976-01	s	IC ADR381ART-REEL7
IC4	8-759-338-95	s	IC NJM2903V (TE2)

(SDI-87/87G BOARD suffix 11)

Ref. No. or Q'ty	Part No.	SP	Description
IC5	8-759-338-95	s	IC NJM2903V (TE2)
IC101	6-702-578-01	s	IC MSW-2-20+-TR
IC102	6-702-620-01	s	IC GS1524-CKDE3
IC103	6-701-084-01	s	IC MC10EP57DTR2
IC201	6-702-578-01	s	IC MSW-2-20+-TR
IC202	6-702-620-01	s	IC GS1524-CKDE3
IC203	6-701-084-01	s	IC MC10EP57DTR2
IC301	6-702-578-01	s	IC MSW-2-20+-TR
IC302	6-702-620-01	s	IC GS1524-CKDE3
IC303	8-759-561-46	s	IC AD8014ART-REEL7
IC401	8-759-471-85	s	IC 74VHC00MTCX
IC402	8-759-471-85	s	IC 74VHC00MTCX
IC403	8-759-471-96	s	IC 74VHC08MTCX
IC404	8-759-471-85	s	IC 74VHC00MTCX
IC501	8-759-561-46	s	IC AD8014ART-REEL7
IC502	8-759-561-46	s	IC AD8014ART-REEL7
L1	1-416-344-11	s	COIL, CHOKE 10UH
L2	1-414-398-11	s	INDUCTOR (SMD) 10UH
L3	1-414-398-11	s	INDUCTOR (SMD) 10UH
L4	1-414-398-11	s	INDUCTOR (SMD) 10UH
L101	1-414-461-31	s	INDUCTOR, CHIP (K) 6.8NH
L201	1-414-461-31	s	INDUCTOR, CHIP (K) 6.8NH
L301	1-414-461-31	s	INDUCTOR, CHIP (K) 6.8NH
L303	1-414-398-11	s	INDUCTOR (SMD) 10UH
L304	1-414-398-11	s	INDUCTOR (SMD) 10UH
L501	1-414-398-11	s	INDUCTOR (SMD) 10UH
L502	1-414-398-11	s	INDUCTOR (SMD) 10UH
Q1	8-729-230-27	s	TRANSISTOR 2SA1213Y-TE12L
Q2	8-729-927-99	s	TRANSISTOR 2SC4617R
Q3	8-729-230-27	s	TRANSISTOR 2SA1213Y-TE12L
Q4	8-729-807-51	s	TRANSISTOR 2SD1623-S
Q5	8-729-928-19	s	TRANSISTOR 2SA1774R
Q6	8-729-927-99	s	TRANSISTOR 2SC4617R
Q101	8-729-927-99	s	TRANSISTOR 2SC4617R
Q102	8-729-928-19	s	TRANSISTOR 2SA1774R
Q103	8-729-046-30	s	TRANSISTOR 2SC5245-4/5-TL-E
Q104	8-729-927-99	s	TRANSISTOR 2SC4617R
Q105	8-729-928-19	s	TRANSISTOR 2SA1774R
Q106	8-729-928-19	s	TRANSISTOR 2SA1774R
Q107	8-729-821-88	s	TRANSISTOR 2SK1332-3
Q108	8-729-928-27	s	TRANSISTOR DTA144EE
Q109	8-729-928-81	s	TRANSISTOR DTC144EE
Q110	8-729-927-99	s	TRANSISTOR 2SC4617R
Q111	8-729-927-99	s	TRANSISTOR 2SC4617R
Q112	8-729-928-27	s	TRANSISTOR DTA144EE
Q113	8-729-928-81	s	TRANSISTOR DTC144EE
Q114	8-729-041-23	s	TRANSISTOR NDS356AP
Q201	8-729-927-99	s	TRANSISTOR 2SC4617R
Q202	8-729-928-19	s	TRANSISTOR 2SA1774R
Q203	8-729-046-30	s	TRANSISTOR 2SC5245-4/5-TL-E
Q204	8-729-927-99	s	TRANSISTOR 2SC4617R
Q205	8-729-928-19	s	TRANSISTOR 2SA1774R
Q206	8-729-928-19	s	TRANSISTOR 2SA1774R
Q207	8-729-821-88	s	TRANSISTOR 2SK1332-3
Q208	8-729-928-27	s	TRANSISTOR DTA144EE
Q209	8-729-928-81	s	TRANSISTOR DTC144EE
Q210	8-729-927-99	s	TRANSISTOR 2SC4617R

(SDI-87/87G BOARD suffix 11)

Ref. No. or Q'ty	Part No.	SP	Description
Q211	8-729-927-99	s	TRANSISTOR 2SC4617R
Q301	8-729-927-99	s	TRANSISTOR 2SC4617R
Q302	8-729-928-19	s	TRANSISTOR 2SA1774R
Q303	8-729-046-30	s	TRANSISTOR 2SC5245-4/5-TL-E
Q304	8-729-927-99	s	TRANSISTOR 2SC4617R
Q305	8-729-928-19	s	TRANSISTOR 2SA1774R
Q306	8-729-928-19	s	TRANSISTOR 2SA1774R
Q307	8-729-821-88	s	TRANSISTOR 2SK1332-3
Q308	8-729-928-27	s	TRANSISTOR DTA144EE
Q309	8-729-928-81	s	TRANSISTOR DTC144EE
Q401	8-729-928-27	s	TRANSISTOR DTA144EE
Q402	8-729-928-81	s	TRANSISTOR DTC144EE
Q403	8-729-928-27	s	TRANSISTOR DTA144EE
Q404	8-729-928-27	s	TRANSISTOR DTA144EE
Q405	8-729-928-81	s	TRANSISTOR DTC144EE
Q406	8-729-928-27	s	TRANSISTOR DTA144EE
Q407	8-729-928-27	s	TRANSISTOR DTA144EE
Q408	8-729-928-81	s	TRANSISTOR DTC144EE
Q409	8-729-928-27	s	TRANSISTOR DTA144EE
Q410	8-729-928-27	s	TRANSISTOR DTA144EE
Q411	8-729-928-27	s	TRANSISTOR DTA144EE
Q412	8-729-928-27	s	TRANSISTOR DTA144EE
Q413	8-729-928-27	s	TRANSISTOR DTA144EE
Q414	8-729-928-81	s	TRANSISTOR DTC144EE
Q415	8-729-041-23	s	TRANSISTOR NDS356AP
R1	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R2	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R3	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R4	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R5	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R6	1-208-931-11	s	RESISTOR, CHIP 68K (1005)
R7	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R8	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R9	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R10	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R11	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R12	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R13	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R14	1-208-931-11	s	RESISTOR, CHIP 68K (1005)
R15	1-208-931-11	s	RESISTOR, CHIP 68K (1005)
R16	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R18	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R19	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R20	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R21	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R22	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R23	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R24	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R25	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R26	1-208-703-11	s	RESISTOR,CHIP 6.8K 1/16W(1005)
R27	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R28	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R29	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R30	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R31	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R32	1-208-931-11	s	RESISTOR, CHIP 68K (1005)
R33	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R34	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R35	1-208-911-11	s	RESISTOR, CHIP 10K (1005)

(SDI-87/87G BOARD suffix 11)

Ref. No. or Q'ty	Part No.	SP	Description
R36	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R37	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R101	1-208-860-11	s	RESISTOR CHIP 75 1/16W (1005)
R102	1-208-860-11	s	RESISTOR CHIP 75 1/16W (1005)
R104	1-208-860-11	s	RESISTOR CHIP 75 1/16W (1005)
R105	1-208-860-11	s	RESISTOR CHIP 75 1/16W (1005)
R106	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R107	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R108	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R109	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R110	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R111	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R112	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R113	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R114	1-208-663-11	s	RESISTOR CHIP 150 1/16W (1005)
R115	1-208-663-11	s	RESISTOR CHIP 150 1/16W (1005)
R116	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R117	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R118	1-208-943-11	s	RESISTOR CHIP 220K
R119	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R120	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R121	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R122	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R123	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R124	1-208-652-11	s	RESISTOR CHIP 51 1/16W (1005)
R125	1-208-652-11	s	RESISTOR CHIP 51 1/16W (1005)
R126	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R127	1-208-652-11	s	RESISTOR CHIP 51 1/16W (1005)
R128	1-208-652-11	s	RESISTOR CHIP 51 1/16W (1005)
R129	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R130	1-208-652-11	s	RESISTOR CHIP 51 1/16W (1005)
R131	1-208-652-11	s	RESISTOR CHIP 51 1/16W (1005)
R132	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R133	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R134	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R135	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R136	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R137	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R138	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R139	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R140	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R141	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R142	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R143	1-208-931-11	s	RESISTOR, CHIP 68K (1005)
R144	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R145	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R146	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R147	1-208-931-11	s	RESISTOR, CHIP 68K (1005)
R148	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R149	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R150	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005
R201	1-208-860-11	s	RESISTOR CHIP 75 1/16W (1005)
R202	1-208-860-11	s	RESISTOR CHIP 75 1/16W (1005)
R204	1-208-860-11	s	RESISTOR CHIP 75 1/16W (1005)
R205	1-208-860-11	s	RESISTOR CHIP 75 1/16W (1005)
R206	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R207	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R208	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R209	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)

(SDI-87/87G BOARD suffix 11)

Ref. No. or Q'ty	Part No.	SP	Description
R210	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R211	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R212	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R213	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R214	1-208-663-11	s	RESISTOR CHIP 150 1/16W (1005)
R215	1-208-663-11	s	RESISTOR CHIP 150 1/16W (1005)
R216	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R217	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R218	1-208-943-11	s	RESISTOR CHIP 220K
R219	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R220	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R221	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R222	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R223	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R224	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R225	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R226	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R227	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R228	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R229	1-208-931-11	s	RESISTOR, CHIP 68K (1005)
R230	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R231	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R232	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R233	1-208-931-11	s	RESISTOR, CHIP 68K (1005)
R234	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R235	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R250	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005
R301	1-208-860-11	s	RESISTOR CHIP 75 1/16W (1005)
R302	1-208-860-11	s	RESISTOR CHIP 75 1/16W (1005)
R304	1-208-860-11	s	RESISTOR CHIP 75 1/16W (1005)
R305	1-208-860-11	s	RESISTOR CHIP 75 1/16W (1005)
R306	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R307	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R308	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R309	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R310	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R311	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R312	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R313	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R314	1-208-663-11	s	RESISTOR CHIP 150 1/16W (1005)
R315	1-208-663-11	s	RESISTOR CHIP 150 1/16W (1005)
R316	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R317	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R318	1-208-943-11	s	RESISTOR CHIP 220K
R319	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R320	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R321	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R322	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R323	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R325	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R326	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R327	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R328	1-208-703-11	s	RESISTOR,CHIP 6.8K 1/16W(1005)
R329	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R330	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R331	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R332	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R333	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R334	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)

(SDI-87/87G BOARD suffix 11)

Ref. No. or Q'ty	Part No.	SP	Description
R350	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005
R401	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R402	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R403	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R404	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R405	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R406	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R407	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R408	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R409	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R410	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R411	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R412	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R413	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R414	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R415	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R416	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R417	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R418	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R501	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R502	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R503	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R504	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R505	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R506	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R507	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R508	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R509	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R510	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)

SDP-12 BOARD (suffix 14)

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1129-303-C	s	MOUNTED CIRCUIT BOARD, SDP-12
2pcs	3-364-941-01	s	SCREW (+B) (2.6X5), NYLOK
C1	1-100-620-91	s	CAP, CHIP CERAMIC 47MF B(3225)
C4	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C6	1-165-872-21	s	CAP, ELECT 47MF (5.0X6.5)
C9	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C11	1-126-394-21	s	CAP, CHIP ELECT 10MF (4X5.7)
C13	1-165-872-21	s	CAP, ELECT 47MF (5.0X6.5)
C16	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C17	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C20	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C22	1-126-394-21	s	CAP, CHIP ELECT 10MF (4X5.7)
C23	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C24	1-100-620-91	s	CAP, CHIP CERAMIC 47MF B(3225)
C25	1-100-620-91	s	CAP, CHIP CERAMIC 47MF B(3225)
C26	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C27	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C29	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C30	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C31	1-128-416-21	s	CAP, CHIP ELECT 100MF
C32	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C33	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C34	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C35	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C36	1-100-620-91	s	CAP, CHIP CERAMIC 47MF B(3225)
C37	1-100-620-91	s	CAP, CHIP CERAMIC 47MF B(3225)
C38	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C39	1-164-936-81	s	CAP, CHIP CERAMIC 680PF B 1005
C40	1-100-620-91	s	CAP, CHIP CERAMIC 47MF B(3225)
C41	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C42	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C43	1-165-872-21	s	CAP, ELECT 47MF (5.0X6.5)
C44	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C45	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C46	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C47	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C48	1-100-620-91	s	CAP, CHIP CERAMIC 47MF B(3225)
C49	1-100-620-91	s	CAP, CHIP CERAMIC 47MF B(3225)
C50	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C51	1-164-936-81	s	CAP, CHIP CERAMIC 680PF B 1005
C52	1-100-620-91	s	CAP, CHIP CERAMIC 47MF B(3225)
C53	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C55	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C56	1-165-872-21	s	CAP, ELECT 47MF (5.0X6.5)
C57	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C101	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C102	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C103	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C104	1-126-394-21	s	CAP, CHIP ELECT 10MF (4X5.7)
C105	1-126-394-21	s	CAP, CHIP ELECT 10MF (4X5.7)
C106	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C107	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C108	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C109	1-125-891-91	s	CAP, CHIP CERAMIC0.47MF B 1608
C110	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C111	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C112	1-125-891-91	s	CAP, CHIP CERAMIC0.47MF B 1608
C113	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225

(SDP-12 BOARD suffix 14)

Ref. No. or Q'ty	Part No.	SP	Description
C114	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C115	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C116	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C117	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C118	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C119	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C120	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C121	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C122	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C123	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C210	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C218	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C222	1-216-864-91	s	CONDUCTOR, CHIP (1608)
C223	1-216-864-91	s	CONDUCTOR, CHIP (1608)
C225	1-100-507-91	s	CAP, CERAMIC 4.7MF C (1608)
C226	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C227	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C228	1-100-507-91	s	CAP, CERAMIC 4.7MF C (1608)
C229	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C230	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C231	1-164-939-81	s	CAP, CHIPCERAMIC 2200PF B 1005
C232	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C233	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C234	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C235	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C236	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C237	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C238	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C239	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C240	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C241	1-100-507-91	s	CAP, CERAMIC 4.7MF C (1608)
C246	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C248	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C249	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C250	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C251	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C252	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C253	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C254	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C255	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C256	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C257	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C258	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C259	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C260	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C261	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C262	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C263	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C264	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C265	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C266	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C267	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C268	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C269	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C270	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C271	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C274	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C276	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C277	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(SDP-12 BOARD suffix 14)

Ref. No. or Q'ty	Part No.	SP	Description
C279	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C404	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C405	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C406	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C407	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C408	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C409	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C410	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C412	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C413	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C415	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C416	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C417	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C418	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C420	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C421	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C422	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C423	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C424	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C425	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C426	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C427	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C428	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C429	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C430	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C431	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C432	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C433	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C434	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C435	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C436	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C437	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C438	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C439	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C440	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C441	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C442	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C445	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C446	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C447	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C448	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C449	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C450	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C451	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C452	1-100-507-91	s	CAP, CERAMIC 4.7MF C (1608)
C453	1-100-507-91	s	CAP, CERAMIC 4.7MF C (1608)
C454	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C455	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C456	1-100-507-91	s	CAP, CERAMIC 4.7MF C (1608)
C457	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C458	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C459	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C460	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C461	1-216-864-91	s	CONDUCTOR, CHIP (1608)
C462	1-216-864-91	s	CONDUCTOR, CHIP (1608)
C475	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C479	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C482	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C483	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(SDP-12 BOARD suffix 14)

Ref. No. or Q'ty	Part No.	SP	Description
C484	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C943	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C944	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C945	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C949	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
CN103	1-695-480-21	o	PIN, CONNECTOR (PC BOARD) 2P
CN104	1-770-470-21	o	PIN, CONNECTOR (PC BOARD) 6P
CN105	1-815-921-11	s	JACK, MODULAR
CN402	1-764-080-21	o	PIN, CONNECTOR (PC BOARD) 8P
CP201	1-417-612-21	s	CONVERSION MODULE,O/E,OE-301
CP401	1-417-611-12	s	CONVERSION MODULE,E/O,EO-300
D1	8-719-017-03	s	DIODE 02DZ4.7-TPH3
D2	8-719-017-03	s	DIODE 02DZ4.7-TPH3
D5	8-719-024-81	s	DIODE 1SS300-TE85L
D101	8-719-024-81	s	DIODE 1SS300-TE85L
D102	8-719-024-81	s	DIODE 1SS300-TE85L
D103	8-719-024-81	s	DIODE 1SS300-TE85L
E1	1-535-877-22	s	CHIP, CHECKER
E2	1-535-877-22	s	CHIP, CHECKER
FB1	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB2	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB3	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB4	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB5	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB6	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB101	1-414-554-21	s	FERRITE, EMI (SMD) (1608)
FB203	1-414-554-21	s	FERRITE, EMI (SMD) (1608)
FB204	1-414-554-21	s	FERRITE, EMI (SMD) (1608)
FB205	1-414-554-21	s	FERRITE, EMI (SMD) (1608)
FB207	1-414-554-21	s	FERRITE, EMI (SMD) (1608)
FB209	1-414-554-21	s	FERRITE, EMI (SMD) (1608)
FB210	1-414-554-21	s	FERRITE, EMI (SMD) (1608)
FB211	1-414-554-21	s	FERRITE, EMI (SMD) (1608)
FB213	1-414-554-21	s	FERRITE, EMI (SMD) (1608)
FB401	1-414-554-21	s	FERRITE, EMI (SMD) (1608)
FB402	1-414-554-21	s	FERRITE, EMI (SMD) (1608)
FB403	1-414-554-21	s	FERRITE, EMI (SMD) (1608)
FB404	1-414-554-21	s	FERRITE, EMI (SMD) (1608)
FB405	1-414-554-21	s	FERRITE, EMI (SMD) (1608)
FB406	1-414-554-21	s	FERRITE, EMI (SMD) (1608)
FB407	1-414-554-21	s	FERRITE, EMI (SMD) (1608)
FB408	1-414-554-21	s	FERRITE, EMI (SMD) (1608)
FB410	1-414-554-21	s	FERRITE, EMI (SMD) (1608)
IC1	8-759-327-01	s	IC NJM062V(TE2)
IC2	8-759-327-01	s	IC NJM062V(TE2)
IC3	6-704-976-01	s	IC ADR381ARTZ-REEL7
IC4	8-759-327-01	s	IC NJM062V(TE2)
IC5	6-706-482-01	s	IC TC7SH00FU(T5RSOYJF)
IC6	6-701-572-01	s	IC TPS54610PWPR
IC7	6-701-572-01	s	IC TPS54610PWPR
IC9	8-759-338-95	s	IC NJM2903V(TE2)
IC10	8-759-338-95	s	IC NJM2903V(TE2)
IC101	8-759-338-95	s	IC NJM2903V(TE2)
IC102	8-759-338-95	s	IC NJM2903V(TE2)
IC103	8-759-471-85	s	IC 74VHC00MTCX
IC104	8-759-327-01	s	IC NJM062V(TE2)
IC105	8-759-327-01	s	IC NJM062V(TE2)

(SDP-12 BOARD suffix 14)

Ref. No. or Q'ty	Part No.	SP	Description
IC106	8-759-346-27	s	IC LM45BIM3X
IC107	8-759-523-01	s	IC TC74HC4052AFT(EL)
IC202	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC204	6-708-295-01	s	IC GS-1559-CBE2
IC205	8-759-592-44	s	IC TC7SZ04FU(TE85R)
IC207	8-759-472-43	s	IC 74VHC245MTCX
IC209	8-759-592-42	s	IC TC7SZ00FU(TE85R)
IC210	6-700-804-01	s	IC SN74LVC574APWR
IC211	6-700-804-01	s	IC SN74LVC574APWR
IC212	6-700-804-01	s	IC SN74LVC574APWR
IC213	8-759-592-42	s	IC TC7SZ00FU(TE85R)
IC401	6-700-804-01	s	IC SN74LVC574APWR
IC402	6-700-804-01	s	IC SN74LVC574APWR
IC403	6-700-804-01	s	IC SN74LVC574APWR
IC404	8-759-592-44	s	IC TC7SZ04FU(TE85R)
IC405	8-759-472-43	s	IC 74VHC245MTCX
IC407	8-759-363-26	s	IC RN5VD28AA-TL-FA
IC408	8-759-471-96	s	IC 74VHC08MTCX
IC410	6-708-741-01	s	IC GS1531-CBE2
IC413	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC414	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC415	8-759-669-43	s	IC SN74LVC157APWR-12
IC421	8-759-592-44	s	IC TC7SZ04FU(TE85R)
IC422	8-759-592-44	s	IC TC7SZ04FU(TE85R)
IC423	8-759-592-44	s	IC TC7SZ04FU(TE85R)
IC906	6-700-804-01	s	IC SN74LVC574APWR
IC907	6-700-804-01	s	IC SN74LVC574APWR
IC908	6-700-804-01	s	IC SN74LVC574APWR
IC912	8-759-592-42	s	IC TC7SZ00FU(TE85R)
IC913	8-759-592-42	s	IC TC7SZ00FU(TE85R)
JC101	1-218-990-81	s	CONDUCTOR, CHIP (1005)
JC102	1-218-990-81	s	CONDUCTOR, CHIP (1005)
L1	1-457-205-21	s	COIL, CHOKE (SMD) 3.3UH
L2	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L3	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L4	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L5	1-416-344-21	s	COIL, CHOKE 10UH
L6	1-416-344-21	s	COIL, CHOKE 10UH
L7	1-416-344-21	s	COIL, CHOKE 10UH
L202	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L203	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L204	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L205	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L401	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L402	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L403	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
Q1	8-729-035-99	s	TRANSISTOR 2SA1615-Z-E2
Q2	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q3	8-729-035-99	s	TRANSISTOR 2SA1615-Z-E2
Q4	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q5	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q6	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q7	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q8	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q9	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q101	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q102	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q103	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR

(SDP-12 BOARD suffix 14)

Ref. No. or Q'ty	Part No.	SP	Description
Q104	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q105	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q106	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q205	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q206	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q207	8-729-041-23	s	TRANSISTOR NDS356AP
Q407	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q408	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q409	8-729-041-23	s	TRANSISTOR NDS356AP
R1	1-208-863-81	s	RES, CHIP 100 (1005)
R2	1-208-871-81	s	RES, CHIP 220 (1005)
R3	1-208-895-81	s	RES, CHIP 2.2K (1005)
R4	1-208-923-81	s	RES, CHIP 33K (1005)
R5	1-208-923-81	s	RES, CHIP 33K (1005)
R6	1-208-863-81	s	RES, CHIP 100 (1005)
R7	1-208-871-81	s	RES, CHIP 220 (1005)
R8	1-208-895-81	s	RES, CHIP 2.2K (1005)
R9	1-208-923-81	s	RES, CHIP 33K (1005)
R10	1-208-923-81	s	RES, CHIP 33K (1005)
R11	1-208-919-81	s	RES, CHIP 22K (1005)
R12	1-208-923-81	s	RES, CHIP 33K (1005)
R13	1-208-911-81	s	RES, CHIP 10K (1005)
R14	1-208-871-81	s	RES, CHIP 220 (1005)
R15	1-208-871-81	s	RES, CHIP 220 (1005)
R16	1-208-923-81	s	RES, CHIP 33K (1005)
R17	1-208-923-81	s	RES, CHIP 33K (1005)
R18	1-208-931-81	s	RES, CHIP 68K (1005)
R19	1-208-931-81	s	RES, CHIP 68K (1005)
R20	1-208-927-81	s	RES, CHIP 47K (1005)
R21	1-208-903-81	s	RES, CHIP 4.7K (1005)
R22	1-208-939-81	s	RES, CHIP 150K (1005)
R23	1-208-923-81	s	RES, CHIP 33K (1005)
R24	1-208-927-81	s	RES, CHIP 47K (1005)
R25	1-208-927-81	s	RES, CHIP 47K (1005)
R26	1-208-923-81	s	RES, CHIP 33K (1005)
R27	1-208-927-81	s	RES, CHIP 47K (1005)
R28	1-208-887-81	s	RES, CHIP 1.0K (1005)
R29	1-208-887-81	s	RES, CHIP 1.0K (1005)
R30	1-208-887-81	s	RES, CHIP 1.0K (1005)
R31	1-208-911-81	s	RES, CHIP 10K (1005)
R32	1-208-891-81	s	RES, CHIP 1.5K (1005)
R33	1-208-863-81	s	RES, CHIP 100 (1005)
R34	1-208-911-81	s	RES, CHIP 10K (1005)
R35	1-208-907-81	s	RES, CHIP 6.8K (1005)
R36	1-208-907-81	s	RES, CHIP 6.8K (1005)
R37	1-208-887-81	s	RES, CHIP 1.0K (1005)
R38	1-208-935-81	s	RES, CHIP 100K (1005)
R39	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R40	1-208-871-81	s	RES, CHIP 220 (1005)
R41	1-208-863-81	s	RES, CHIP 100 (1005)
R42	1-208-891-81	s	RES, CHIP 1.5K (1005)
R43	1-208-863-81	s	RES, CHIP 100 (1005)
R44	1-208-911-81	s	RES, CHIP 10K (1005)
R45	1-208-907-81	s	RES, CHIP 6.8K (1005)
R46	1-208-891-81	s	RES, CHIP 1.5K (1005)
R47	1-208-891-81	s	RES, CHIP 1.5K (1005)
R48	1-242-967-81	s	RES, CHIP 1.0 (1005)
R49	1-242-967-81	s	RES, CHIP 1.0 (1005)
R51	1-208-923-81	s	RES, CHIP 33K (1005)

(SDP-12 BOARD suffix 14)

Ref. No. or Q'ty	Part No.	SP	Description
R52	1-208-895-81	s	RES, CHIP 2.2K (1005)
R53	1-208-915-81	s	RES, CHIP 15K (1005)
R54	1-208-919-81	s	RES, CHIP 22K (1005)
R55	1-208-911-81	s	RES, CHIP 10K (1005)
R56	1-208-895-81	s	RES, CHIP 2.2K (1005)
R57	1-208-915-81	s	RES, CHIP 15K (1005)
R58	1-208-919-81	s	RES, CHIP 22K (1005)
R59	1-208-907-81	s	RES, CHIP 6.8K (1005)
R60	1-208-927-81	s	RES, CHIP 47K (1005)
R61	1-208-931-81	s	RES, CHIP 68K (1005)
R62	1-208-911-81	s	RES, CHIP 10K (1005)
R63	1-208-907-81	s	RES, CHIP 6.8K (1005)
R64	1-208-915-81	s	RES, CHIP 15K (1005)
R65	1-208-895-81	s	RES, CHIP 2.2K (1005)
R66	1-208-911-81	s	RES, CHIP 10K (1005)
R67	1-208-911-81	s	RES, CHIP 10K (1005)
R68	1-208-911-81	s	RES, CHIP 10K (1005)
R69	1-208-871-81	s	RES, CHIP 220 (1005)
R70	1-208-867-81	s	RES, CHIP 150 (1005)
R71	1-208-887-81	s	RES, CHIP 1.0K (1005)
R72	1-208-871-81	s	RES, CHIP 220 (1005)
R73	1-208-903-81	s	RES, CHIP 4.7K (1005)
R74	1-208-927-81	s	RES, CHIP 47K (1005)
R75	1-208-895-81	s	RES, CHIP 2.2K (1005)
R76	1-208-895-81	s	RES, CHIP 2.2K (1005)
R101	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R102	1-208-887-81	s	RES, CHIP 1.0K (1005)
R103	1-208-911-81	s	RES, CHIP 10K (1005)
R104	1-208-911-81	s	RES, CHIP 10K (1005)
R105	1-208-919-81	s	RES, CHIP 22K (1005)
R106	1-208-879-81	s	RES, CHIP 470 (1005)
R107	1-208-903-81	s	RES, CHIP 4.7K (1005)
R108	1-208-903-81	s	RES, CHIP 4.7K (1005)
R109	1-208-899-81	s	RES, CHIP 3.3K (1005)
R110	1-208-875-81	s	RES, CHIP 330 (1005)
R111	1-208-903-81	s	RES, CHIP 4.7K (1005)
R112	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R113	1-208-907-81	s	RES, CHIP 6.8K (1005)
R114	1-208-891-81	s	RES, CHIP 1.5K (1005)
R115	1-208-911-81	s	RES, CHIP 10K (1005)
R116	1-208-911-81	s	RES, CHIP 10K (1005)
R117	1-208-911-81	s	RES, CHIP 10K (1005)
R118	1-220-264-91	s	RES,SQUARE TYPE CHIP 1.0K 3225
R120	1-208-935-81	s	RES, CHIP 100K (1005)
R121	1-208-907-81	s	RES, CHIP 6.8K (1005)
R122	1-208-911-81	s	RES, CHIP 10K (1005)
R123	1-208-895-81	s	RES, CHIP 2.2K (1005)
R124	1-208-927-81	s	RES, CHIP 47K (1005)
R125	1-208-919-81	s	RES, CHIP 22K (1005)
R126	1-208-919-81	s	RES, CHIP 22K (1005)
R127	1-208-927-81	s	RES, CHIP 47K (1005)
R128	1-208-927-81	s	RES, CHIP 47K (1005)
R129	1-208-927-81	s	RES, CHIP 47K (1005)
R130	1-208-911-81	s	RES, CHIP 10K (1005)
R131	1-208-895-81	s	RES, CHIP 2.2K (1005)
R132	1-208-907-81	s	RES, CHIP 6.8K (1005)
R133	1-208-919-81	s	RES, CHIP 22K (1005)
R134	1-208-919-81	s	RES, CHIP 22K (1005)
R135	1-208-927-81	s	RES, CHIP 47K (1005)

(SDP-12 BOARD suffix 14)

Ref. No. or Q'ty	Part No.	SP	Description
R136	1-208-927-81	s	RES, CHIP 47K (1005)
R139	1-208-927-81	s	RES, CHIP 47K (1005)
R140	1-208-927-81	s	RES, CHIP 47K (1005)
R141	1-208-895-81	s	RES, CHIP 2.2K (1005)
R142	1-208-907-81	s	RES, CHIP 6.8K (1005)
R143	1-208-911-81	s	RES, CHIP 10K (1005)
R144	1-208-911-81	s	RES, CHIP 10K (1005)
R145	1-208-887-81	s	RES, CHIP 1.0K (1005)
R146	1-208-911-81	s	RES, CHIP 10K (1005)
R147	1-208-887-81	s	RES, CHIP 1.0K (1005)
R148	1-208-927-81	s	RES, CHIP 47K (1005)
R149	1-208-863-81	s	RES, CHIP 100 (1005)
R150	1-208-927-81	s	RES, CHIP 47K (1005)
R151	1-208-863-81	s	RES, CHIP 100 (1005)
R152	1-208-863-81	s	RES, CHIP 100 (1005)
R153	1-208-863-81	s	RES, CHIP 100 (1005)
R154	1-208-863-81	s	RES, CHIP 100 (1005)
R155	1-208-863-81	s	RES, CHIP 100 (1005)
R156	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R157	1-208-935-81	s	RES, CHIP 100K (1005)
R158	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R159	1-208-935-81	s	RES, CHIP 100K (1005)
R161	1-208-863-81	s	RES, CHIP 100 (1005)
R212	1-208-935-81	s	RES, CHIP 100K (1005)
R213	1-208-911-81	s	RES, CHIP 10K (1005)
R217	1-208-911-81	s	RES, CHIP 10K (1005)
R238	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R242	1-208-903-81	s	RES, CHIP 4.7K (1005)
R243	1-208-903-81	s	RES, CHIP 4.7K (1005)
R244	1-208-863-81	s	RES, CHIP 100 (1005)
R245	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R246	1-208-927-81	s	RES, CHIP 47K (1005)
R247	1-208-943-81	s	RES, CHIP 220K (1005)
R248	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R249	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R251	1-208-887-81	s	RES, CHIP 1.0K (1005)
R252	1-208-887-81	s	RES, CHIP 1.0K (1005)
R253	1-220-870-81	s	RES, CHIP 10 (1005)
R254	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R255	1-208-875-81	s	RES, CHIP 330 (1005)
R256	1-208-863-81	s	RES, CHIP 100 (1005)
R257	1-208-887-81	s	RES, CHIP 1.0K (1005)
R259	1-220-870-81	s	RES, CHIP 10 (1005)
R260	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R262	1-220-870-81	s	RES, CHIP 10 (1005)
R264	1-208-863-81	s	RES, CHIP 100 (1005)
R265	1-208-863-81	s	RES, CHIP 100 (1005)
R268	1-208-863-81	s	RES, CHIP 100 (1005)
R269	1-208-863-81	s	RES, CHIP 100 (1005)
R271	1-208-855-81	s	RES, CHIP 47 (1005)
R272	1-208-855-81	s	RES, CHIP 47 (1005)
R277	1-208-855-81	s	RES, CHIP 47 (1005)
R278	1-208-895-81	s	RES, CHIP 2.2K (1005)
R280	1-208-863-81	s	RES, CHIP 100 (1005)
R281	1-208-863-81	s	RES, CHIP 100 (1005)
R282	1-208-911-81	s	RES, CHIP 10K (1005)
R283	1-208-887-81	s	RES, CHIP 1.0K (1005)
R284	1-208-863-81	s	RES, CHIP 100 (1005)
R285	1-208-863-81	s	RES, CHIP 100 (1005)

(SDP-12 BOARD suffix 14)

Ref. No. or Q'ty	Part No.	SP	Description
R286	1-208-863-81	s	RES, CHIP 100 (1005)
R287	1-208-863-81	s	RES, CHIP 100 (1005)
R288	1-208-863-81	s	RES, CHIP 100 (1005)
R289	1-208-863-81	s	RES, CHIP 100 (1005)
R290	1-208-863-81	s	RES, CHIP 100 (1005)
R291	1-208-863-81	s	RES, CHIP 100 (1005)
R292	1-208-863-81	s	RES, CHIP 100 (1005)
R293	1-220-870-81	s	RES, CHIP 10 (1005)
R297	1-220-870-81	s	RES, CHIP 10 (1005)
R298	1-208-855-81	s	RES, CHIP 47 (1005)
R300	1-208-855-81	s	RES, CHIP 47 (1005)
R301	1-208-855-81	s	RES, CHIP 47 (1005)
R302	1-208-855-81	s	RES, CHIP 47 (1005)
R303	1-208-911-81	s	RES, CHIP 10K (1005)
R304	1-208-863-81	s	RES, CHIP 100 (1005)
R305	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R306	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R401	1-220-870-81	s	RES, CHIP 10 (1005)
R403	1-208-863-81	s	RES, CHIP 100 (1005)
R404	1-208-863-81	s	RES, CHIP 100 (1005)
R405	1-208-863-81	s	RES, CHIP 100 (1005)
R406	1-220-870-81	s	RES, CHIP 10 (1005)
R407	1-220-870-81	s	RES, CHIP 10 (1005)
R408	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R409	1-220-870-81	s	RES, CHIP 10 (1005)
R410	1-208-903-81	s	RES, CHIP 4.7K (1005)
R412	1-220-870-81	s	RES, CHIP 10 (1005)
R413	1-220-870-81	s	RES, CHIP 10 (1005)
R414	1-220-870-81	s	RES, CHIP 10 (1005)
R416	1-208-863-81	s	RES, CHIP 100 (1005)
R417	1-208-863-81	s	RES, CHIP 100 (1005)
R418	1-208-863-81	s	RES, CHIP 100 (1005)
R419	1-208-863-81	s	RES, CHIP 100 (1005)
R420	1-208-863-81	s	RES, CHIP 100 (1005)
R421	1-208-863-81	s	RES, CHIP 100 (1005)
R422	1-208-863-81	s	RES, CHIP 100 (1005)
R423	1-208-863-81	s	RES, CHIP 100 (1005)
R424	1-208-935-81	s	RES, CHIP 100K (1005)
R425	1-208-863-81	s	RES, CHIP 100 (1005)
R426	1-208-863-81	s	RES, CHIP 100 (1005)
R427	1-208-935-81	s	RES, CHIP 100K (1005)
R428	1-208-863-81	s	RES, CHIP 100 (1005)
R429	1-208-863-81	s	RES, CHIP 100 (1005)
R433	1-208-855-81	s	RES, CHIP 47 (1005)
R435	1-208-863-81	s	RES, CHIP 100 (1005)
R436	1-208-863-81	s	RES, CHIP 100 (1005)
R437	1-208-863-81	s	RES, CHIP 100 (1005)
R438	1-208-863-81	s	RES, CHIP 100 (1005)
R439	1-208-863-81	s	RES, CHIP 100 (1005)
R440	1-208-863-81	s	RES, CHIP 100 (1005)
R441	1-220-870-81	s	RES, CHIP 10 (1005)
R442	1-220-870-81	s	RES, CHIP 10 (1005)
R444	1-208-863-81	s	RES, CHIP 100 (1005)
R445	1-208-863-81	s	RES, CHIP 100 (1005)
R446	1-208-863-81	s	RES, CHIP 100 (1005)
R447	1-208-863-81	s	RES, CHIP 100 (1005)
R448	1-208-863-81	s	RES, CHIP 100 (1005)
R449	1-208-863-81	s	RES, CHIP 100 (1005)
R450	1-208-911-81	s	RES, CHIP 10K (1005)

(SDP-12 BOARD suffix 14)

Ref. No. or Q'ty	Part No.	SP	Description
R451	1-208-863-81	s	RES, CHIP 100 (1005)
R452	1-208-863-81	s	RES, CHIP 100 (1005)
R453	1-208-863-81	s	RES, CHIP 100 (1005)
R454	1-208-863-81	s	RES, CHIP 100 (1005)
R455	1-208-863-81	s	RES, CHIP 100 (1005)
R456	1-208-863-81	s	RES, CHIP 100 (1005)
R457	1-208-863-81	s	RES, CHIP 100 (1005)
R458	1-208-887-81	s	RES, CHIP 1.0K (1005)
R459	1-208-863-81	s	RES, CHIP 100 (1005)
R460	1-208-863-81	s	RES, CHIP 100 (1005)
R461	1-208-863-81	s	RES, CHIP 100 (1005)
R462	1-208-863-81	s	RES, CHIP 100 (1005)
R463	1-208-863-81	s	RES, CHIP 100 (1005)
R464	1-208-863-81	s	RES, CHIP 100 (1005)
R465	1-208-863-81	s	RES, CHIP 100 (1005)
R466	1-208-863-81	s	RES, CHIP 100 (1005)
R467	1-208-863-81	s	RES, CHIP 100 (1005)
R468	1-208-863-81	s	RES, CHIP 100 (1005)
R469	1-208-863-81	s	RES, CHIP 100 (1005)
R470	1-208-863-81	s	RES, CHIP 100 (1005)
R471	1-208-863-81	s	RES, CHIP 100 (1005)
R472	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R474	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R478	1-220-882-81	s	RES, CHIP 33 (1005)
R480	1-208-915-81	s	RES, CHIP 15K (1005)
R482	1-208-855-81	s	RES, CHIP 47 (1005)
R483	1-208-887-81	s	RES, CHIP 1.0K (1005)
R485	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R486	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R487	1-208-867-81	s	RES, CHIP 150 (1005)
R488	1-208-863-81	s	RES, CHIP 100 (1005)
R489	1-208-887-81	s	RES, CHIP 1.0K (1005)
R490	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R491	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R492	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R493	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R495	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R496	1-208-887-81	s	RES, CHIP 1.0K (1005)
R497	1-208-887-81	s	RES, CHIP 1.0K (1005)
R498	1-208-856-81	s	RES, CHIP 51 (1005)
R499	1-208-856-81	s	RES, CHIP 51 (1005)
R505	1-208-935-81	s	RES, CHIP 100K (1005)
R508	1-208-863-81	s	RES, CHIP 100 (1005)
R521	1-208-863-81	s	RES, CHIP 100 (1005)
R522	1-208-935-81	s	RES, CHIP 100K (1005)
R523	1-208-911-81	s	RES, CHIP 10K (1005)
R532	1-208-863-81	s	RES, CHIP 100 (1005)
R533	1-220-870-81	s	RES, CHIP 10 (1005)
R534	1-208-911-81	s	RES, CHIP 10K (1005)
R535	1-208-911-81	s	RES, CHIP 10K (1005)
R536	1-220-870-81	s	RES, CHIP 10 (1005)
R537	1-208-935-81	s	RES, CHIP 100K (1005)
R538	1-208-911-81	s	RES, CHIP 10K (1005)
R539	1-208-911-81	s	RES, CHIP 10K (1005)
R540	1-208-911-81	s	RES, CHIP 10K (1005)
R565	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R566	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R970	1-208-863-81	s	RES, CHIP 100 (1005)
R973	1-220-870-81	s	RES, CHIP 10 (1005)

(SDP-12 BOARD suffix 14)

Ref. No. or Q'ty	Part No.	SP	Description
R975	1-220-870-81	s	RES, CHIP 10 (1005)
R976	1-208-855-81	s	RES, CHIP 47 (1005)
R978	1-208-855-81	s	RES, CHIP 47 (1005)
R979	1-208-855-81	s	RES, CHIP 47 (1005)
R980	1-208-911-81	s	RES, CHIP 10K (1005)
R981	1-208-863-81	s	RES, CHIP 100 (1005)
RB201	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB202	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB203	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB204	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB205	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB206	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB207	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB213	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB214	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB215	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB216	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB217	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB224	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB225	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB401	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB402	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB403	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB404	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB405	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB406	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB407	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB408	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB409	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB410	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB411	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB412	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB413	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB414	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB415	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB416	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB417	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB418	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB424	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB425	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB426	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB427	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB428	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB429	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB905	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB906	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB907	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB908	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB909	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB910	1-234-371-21	s	RES, NETWORK 47 (1005X4)
S401	1-692-271-41	s	SWITCH, SLIDE
S402	1-771-721-21	s	SWITCH, TACTILE
TP201	1-535-877-22	s	CHIP, CHECKER
TP401	1-535-877-22	s	CHIP, CHECKER
X201	1-814-162-11	s	OSCILLATOR (VCO)
X401	1-814-162-11	s	OSCILLATOR (VCO)

SDP-12 BOARD (suffix 13, 31)

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1129-303-C	s	MOUNTED CIRCUIT BOARD, SDP-12
2pcs	3-364-941-01	s	SCREW (+B) (2.6X5), NYLOK
C1	1-100-620-91	s	CAP, CHIP CERAMIC 47MF B(3225)
C4	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C6	1-165-872-21	s	CAP, ELECT 47MF (5.0X6.5)
C9	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C11	1-126-394-21	s	CAP, CHIP ELECT 10MF (4X5.7)
C13	1-165-872-21	s	CAP, ELECT 47MF (5.0X6.5)
C16	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C17	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C20	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C22	1-126-394-21	s	CAP, CHIP ELECT 10MF (4X5.7)
C23	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C24	1-100-620-91	s	CAP, CHIP CERAMIC 47MF B(3225)
C25	1-100-620-91	s	CAP, CHIP CERAMIC 47MF B(3225)
C26	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C27	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C29	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C30	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C31	1-128-416-21	s	CAP, CHIP ELECT 100MF
C32	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C33	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C34	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C35	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C36	1-100-620-91	s	CAP, CHIP CERAMIC 47MF B(3225)
C37	1-100-620-91	s	CAP, CHIP CERAMIC 47MF B(3225)
C38	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C39	1-164-936-81	s	CAP, CHIP CERAMIC 680PF B 1005
C40	1-100-620-91	s	CAP, CHIP CERAMIC 47MF B(3225)
C41	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C42	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C43	1-165-872-21	s	CAP, ELECT 47MF (5.0X6.5)
C44	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C45	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C46	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C47	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C48	1-100-620-91	s	CAP, CHIP CERAMIC 47MF B(3225)
C49	1-100-620-91	s	CAP, CHIP CERAMIC 47MF B(3225)
C50	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C51	1-164-936-81	s	CAP, CHIP CERAMIC 680PF B 1005
C52	1-100-620-91	s	CAP, CHIP CERAMIC 47MF B(3225)
C53	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C55	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C56	1-165-872-21	s	CAP, ELECT 47MF (5.0X6.5)
C57	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C101	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C102	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C103	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C104	1-126-394-21	s	CAP, CHIP ELECT 10MF (4X5.7)
C105	1-126-394-21	s	CAP, CHIP ELECT 10MF (4X5.7)
C106	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C107	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C108	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C109	1-125-891-91	s	CAP, CHIP CERAMIC0.47MF B 1608
C110	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C111	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C112	1-125-891-91	s	CAP, CHIP CERAMIC0.47MF B 1608
C113	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225

(SDP-12 BOARD suffix 13, 31)

Ref. No. or Q'ty	Part No.	SP	Description
C114	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C115	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C116	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C117	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C118	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C119	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C120	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C121	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C122	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C123	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C210	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C218	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C221	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C222	1-216-864-91	s	CONDUCTOR, CHIP (1608)
C223	1-216-864-91	s	CONDUCTOR, CHIP (1608)
C225	1-100-507-91	s	CAP, CERAMIC 4.7MF C (1608)
C226	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C227	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C228	1-100-507-91	s	CAP, CERAMIC 4.7MF C (1608)
C229	1-164-939-81	s	CAP, CHIPCERAMIC 2200PF B 1005
C230	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C231	1-164-939-81	s	CAP, CHIPCERAMIC 2200PF B 1005
C232	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C233	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C234	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C235	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C236	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C237	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C238	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C239	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C246	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C248	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C249	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C250	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C251	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C252	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C253	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C254	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C255	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C256	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C257	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C258	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C259	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C260	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C261	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C262	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C263	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C264	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C265	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C266	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C267	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C268	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C269	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C270	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C271	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C274	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C276	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C277	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C279	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(SDP-12 BOARD suffix 13, 31)

Ref. No. or Q'ty	Part No.	SP	Description
C404	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C405	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C406	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C407	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C408	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C409	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C410	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C412	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C413	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C415	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C416	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C417	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C418	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C420	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C421	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C422	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C423	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C424	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C425	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C426	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C427	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C428	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C429	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C430	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C431	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C432	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C433	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C434	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C435	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C436	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C437	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C438	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C439	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C440	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C441	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C442	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C445	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C446	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C447	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C448	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C449	1-164-939-81	s	CAP, CHIPCERAMIC 2200PF B 1005
C450	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C451	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C452	1-100-507-91	s	CAP, CERAMIC 4.7MF C (1608)
C453	1-100-507-91	s	CAP, CERAMIC 4.7MF C (1608)
C454	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C455	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C456	1-100-507-91	s	CAP, CERAMIC 4.7MF C (1608)
C457	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C458	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C459	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C460	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C461	1-216-864-91	s	CONDUCTOR, CHIP (1608)
C462	1-216-864-91	s	CONDUCTOR, CHIP (1608)
C475	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C479	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C482	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C483	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C484	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(SDP-12 BOARD suffix 13, 31)

Ref. No. or Q'ty	Part No.	SP	Description
C943	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C944	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C945	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C949	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
CN103	1-695-480-21	o	PIN, CONNECTOR (PC BOARD) 2P
CN104	1-770-470-21	o	PIN, CONNECTOR (PC BOARD) 6P
CN105	1-815-921-11	s	JACK, MODULAR
CN402	1-764-080-21	o	PIN, CONNECTOR (PC BOARD) 8P
CP201	1-417-612-21	s	CONVERSION MODULE,O/E,OE-301
CP401	1-417-611-12	s	CONVERSION MODULE,E/O,EO-300
D1	8-719-017-03	s	DIODE 02DZ4.7-TPH3
D2	8-719-017-03	s	DIODE 02DZ4.7-TPH3
D5	8-719-024-81	s	DIODE 1SS300-TE85L
D101	8-719-024-81	s	DIODE 1SS300-TE85L
D102	8-719-024-81	s	DIODE 1SS300-TE85L
D103	8-719-024-81	s	DIODE 1SS300-TE85L
E1	1-535-877-22	s	CHIP, CHECKER
E2	1-535-877-22	s	CHIP, CHECKER
FB1	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB2	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB3	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB4	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB5	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB6	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB101	1-414-554-21	s	FERRITE, EMI (SMD) (1608)
FB203	1-414-554-21	s	FERRITE, EMI (SMD) (1608)
FB204	1-414-554-21	s	FERRITE, EMI (SMD) (1608)
FB205	1-414-554-21	s	FERRITE, EMI (SMD) (1608)
FB206	1-414-554-21	s	FERRITE, EMI (SMD) (1608)
FB207	1-414-554-21	s	FERRITE, EMI (SMD) (1608)
FB208	1-414-554-21	s	FERRITE, EMI (SMD) (1608)
FB209	1-414-554-21	s	FERRITE, EMI (SMD) (1608)
FB210	1-414-554-21	s	FERRITE, EMI (SMD) (1608)
FB211	1-414-554-21	s	FERRITE, EMI (SMD) (1608)
FB401	1-414-554-21	s	FERRITE, EMI (SMD) (1608)
FB402	1-414-554-21	s	FERRITE, EMI (SMD) (1608)
FB403	1-414-554-21	s	FERRITE, EMI (SMD) (1608)
FB404	1-414-554-21	s	FERRITE, EMI (SMD) (1608)
FB405	1-414-554-21	s	FERRITE, EMI (SMD) (1608)
FB406	1-414-554-21	s	FERRITE, EMI (SMD) (1608)
FB407	1-414-554-21	s	FERRITE, EMI (SMD) (1608)
FB408	1-414-554-21	s	FERRITE, EMI (SMD) (1608)
FB409	1-414-554-21	s	FERRITE, EMI (SMD) (1608)
FB410	1-414-554-21	s	FERRITE, EMI (SMD) (1608)
IC1	8-759-327-01	s	IC NJM062V(TE2)
IC2	8-759-327-01	s	IC NJM062V(TE2)
IC3	6-704-976-01	s	IC ADR381ARTZ-REEL7
IC4	8-759-327-01	s	IC NJM062V(TE2)
IC5	6-706-482-01	s	IC TC7SH00FU(T5RSOYJF)
IC6	6-701-572-01	s	IC TPS54610PWPR
IC7	6-701-572-01	s	IC TPS54610PWPR
IC9	8-759-338-95	s	IC NJM2903V(TE2)
IC10	8-759-338-95	s	IC NJM2903V(TE2)
IC101	8-759-338-95	s	IC NJM2903V(TE2)
IC102	8-759-338-95	s	IC NJM2903V(TE2)
IC103	8-759-471-85	s	IC 74VHC00MTCX

(SDP-12 BOARD suffix 13, 31)

Ref. No. or Q'ty	Part No.	SP	Description
IC104	8-759-327-01	s	IC NJM062V(TE2)
IC105	8-759-327-01	s	IC NJM062V(TE2)
IC106	8-759-346-27	s	IC LM45BIM3X
IC107	8-759-523-01	s	IC TC74HC4052AFT(EL)
IC202	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC204	6-709-052-01	s	IC GS1561-CFE3
IC205	8-759-592-44	s	IC TC7SZ04FU(TE85R)
IC207	8-759-472-43	s	IC 74VHC245MTCX
IC209	8-759-592-42	s	IC TC7SZ00FU(TE85R)
IC210	6-700-804-01	s	IC SN74LVC574APWR
IC211	6-700-804-01	s	IC SN74LVC574APWR
IC212	6-700-804-01	s	IC SN74LVC574APWR
IC213	8-759-592-42	s	IC TC7SZ00FU(TE85R)
IC401	6-700-804-01	s	IC SN74LVC574APWR
IC402	6-700-804-01	s	IC SN74LVC574APWR
IC403	6-700-804-01	s	IC SN74LVC574APWR
IC404	8-759-592-44	s	IC TC7SZ04FU(TE85R)
IC405	8-759-472-43	s	IC 74VHC245MTCX
IC407	8-759-363-26	s	IC RN5VD28AA-TL-FA
IC408	8-759-471-96	s	IC 74VHC08MTCX
IC410	6-703-693-01	s	IC GS1532-CFE3
IC413	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC414	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC415	8-759-669-43	s	IC SN74LVC157APWR-12
IC421	8-759-592-44	s	IC TC7SZ04FU(TE85R)
IC422	8-759-592-44	s	IC TC7SZ04FU(TE85R)
IC423	8-759-592-44	s	IC TC7SZ04FU(TE85R)
IC906	6-700-804-01	s	IC SN74LVC574APWR
IC907	6-700-804-01	s	IC SN74LVC574APWR
IC908	6-700-804-01	s	IC SN74LVC574APWR
IC912	8-759-592-42	s	IC TC7SZ00FU(TE85R)
IC913	8-759-592-42	s	IC TC7SZ00FU(TE85R)
JC101	1-218-990-81	s	CONDUCTOR, CHIP (1005)
JC102	1-218-990-81	s	CONDUCTOR, CHIP (1005)
L1	1-457-205-21	s	COIL, CHOKE (SMD) 3.3UH
L2	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L3	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L4	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L5	1-416-344-21	s	COIL, CHOKE 10UH
L6	1-416-344-21	s	COIL, CHOKE 10UH
L7	1-416-344-21	s	COIL, CHOKE 10UH
L202	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L203	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L204	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L205	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L401	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L402	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L403	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
Q1	8-729-035-99	s	TRANSISTOR 2SA1615-Z-E2
Q2	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q3	8-729-035-99	s	TRANSISTOR 2SA1615-Z-E2
Q4	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q5	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q6	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q7	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q8	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q9	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q101	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR

(SDP-12 BOARD suffix 13, 31)

Ref. No. or Q'ty	Part No.	SP	Description
Q102	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q103	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q104	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q105	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q106	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q205	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q206	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q207	8-729-041-23	s	TRANSISTOR NDS356AP
Q407	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q408	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q409	8-729-041-23	s	TRANSISTOR NDS356AP
R1	1-208-863-81	s	RES, CHIP 100 (1005)
R2	1-208-871-81	s	RES, CHIP 220 (1005)
R3	1-208-895-81	s	RES, CHIP 2.2K (1005)
R4	1-208-923-81	s	RES, CHIP 33K (1005)
R5	1-208-923-81	s	RES, CHIP 33K (1005)
R6	1-208-863-81	s	RES, CHIP 100 (1005)
R7	1-208-871-81	s	RES, CHIP 220 (1005)
R8	1-208-895-81	s	RES, CHIP 2.2K (1005)
R9	1-208-923-81	s	RES, CHIP 33K (1005)
R10	1-208-923-81	s	RES, CHIP 33K (1005)
R11	1-208-919-81	s	RES, CHIP 22K (1005)
R12	1-208-923-81	s	RES, CHIP 33K (1005)
R13	1-208-911-81	s	RES, CHIP 10K (1005)
R14	1-208-871-81	s	RES, CHIP 220 (1005)
R15	1-208-871-81	s	RES, CHIP 220 (1005)
R16	1-208-923-81	s	RES, CHIP 33K (1005)
R17	1-208-923-81	s	RES, CHIP 33K (1005)
R18	1-208-931-81	s	RES, CHIP 68K (1005)
R19	1-208-931-81	s	RES, CHIP 68K (1005)
R20	1-208-927-81	s	RES, CHIP 47K (1005)
R21	1-208-903-81	s	RES, CHIP 4.7K (1005)
R22	1-208-939-81	s	RES, CHIP 150K (1005)
R23	1-208-923-81	s	RES, CHIP 33K (1005)
R24	1-208-927-81	s	RES, CHIP 47K (1005)
R25	1-208-927-81	s	RES, CHIP 47K (1005)
R26	1-208-923-81	s	RES, CHIP 33K (1005)
R27	1-208-927-81	s	RES, CHIP 47K (1005)
R28	1-208-887-81	s	RES, CHIP 1.0K (1005)
R29	1-208-887-81	s	RES, CHIP 1.0K (1005)
R30	1-208-887-81	s	RES, CHIP 1.0K (1005)
R31	1-208-911-81	s	RES, CHIP 10K (1005)
R32	1-208-891-81	s	RES, CHIP 1.5K (1005)
R33	1-208-863-81	s	RES, CHIP 100 (1005)
R34	1-208-911-81	s	RES, CHIP 10K (1005)
R35	1-208-907-81	s	RES, CHIP 6.8K (1005)
R36	1-208-907-81	s	RES, CHIP 6.8K (1005)
R37	1-208-887-81	s	RES, CHIP 1.0K (1005)
R38	1-208-935-81	s	RES, CHIP 100K (1005)
R39	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R40	1-208-871-81	s	RES, CHIP 220 (1005)
R41	1-208-863-81	s	RES, CHIP 100 (1005)
R42	1-208-891-81	s	RES, CHIP 1.5K (1005)
R43	1-208-863-81	s	RES, CHIP 100 (1005)
R44	1-208-911-81	s	RES, CHIP 10K (1005)
R45	1-208-907-81	s	RES, CHIP 6.8K (1005)
R46	1-208-891-81	s	RES, CHIP 1.5K (1005)
R47	1-208-891-81	s	RES, CHIP 1.5K (1005)

(SDP-12 BOARD suffix 13, 31)

Ref. No. or Q'ty	Part No.	SP	Description
R48	1-242-967-81	s	RES, CHIP 1.0 (1005)
R49	1-242-967-81	s	RES, CHIP 1.0 (1005)
R51	1-208-923-81	s	RES, CHIP 33K (1005)
R52	1-208-895-81	s	RES, CHIP 2.2K (1005)
R53	1-208-915-81	s	RES, CHIP 15K (1005)
R54	1-208-919-81	s	RES, CHIP 22K (1005)
R55	1-208-911-81	s	RES, CHIP 10K (1005)
R56	1-208-895-81	s	RES, CHIP 2.2K (1005)
R57	1-208-915-81	s	RES, CHIP 15K (1005)
R58	1-208-919-81	s	RES, CHIP 22K (1005)
R59	1-208-907-81	s	RES, CHIP 6.8K (1005)
R60	1-208-927-81	s	RES, CHIP 47K (1005)
R61	1-208-931-81	s	RES, CHIP 68K (1005)
R62	1-208-911-81	s	RES, CHIP 10K (1005)
R63	1-208-907-81	s	RES, CHIP 6.8K (1005)
R64	1-208-915-81	s	RES, CHIP 15K (1005)
R65	1-208-895-81	s	RES, CHIP 2.2K (1005)
R66	1-208-911-81	s	RES, CHIP 10K (1005)
R67	1-208-911-81	s	RES, CHIP 10K (1005)
R68	1-208-911-81	s	RES, CHIP 10K (1005)
R69	1-208-871-81	s	RES, CHIP 220 (1005)
R70	1-208-867-81	s	RES, CHIP 150 (1005)
R71	1-208-887-81	s	RES, CHIP 1.0K (1005)
R72	1-208-871-81	s	RES, CHIP 220 (1005)
R73	1-208-903-81	s	RES, CHIP 4.7K (1005)
R74	1-208-927-81	s	RES, CHIP 47K (1005)
R75	1-208-895-81	s	RES, CHIP 2.2K (1005)
R76	1-208-895-81	s	RES, CHIP 2.2K (1005)
R101	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R102	1-208-887-81	s	RES, CHIP 1.0K (1005)
R103	1-208-911-81	s	RES, CHIP 10K (1005)
R104	1-208-911-81	s	RES, CHIP 10K (1005)
R105	1-208-919-81	s	RES, CHIP 22K (1005)
R106	1-208-879-81	s	RES, CHIP 470 (1005)
R107	1-208-903-81	s	RES, CHIP 4.7K (1005)
R108	1-208-903-81	s	RES, CHIP 4.7K (1005)
R109	1-208-899-81	s	RES, CHIP 3.3K (1005)
R110	1-208-875-81	s	RES, CHIP 330 (1005)
R111	1-208-903-81	s	RES, CHIP 4.7K (1005)
R112	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R113	1-208-907-81	s	RES, CHIP 6.8K (1005)
R114	1-208-891-81	s	RES, CHIP 1.5K (1005)
R115	1-208-911-81	s	RES, CHIP 10K (1005)
R116	1-208-911-81	s	RES, CHIP 10K (1005)
R117	1-208-911-81	s	RES, CHIP 10K (1005)
R118	1-220-264-91	s	RES,SQUARE TYPE CHIP 1.0K 3225
R120	1-208-935-81	s	RES, CHIP 100K (1005)
R121	1-208-907-81	s	RES, CHIP 6.8K (1005)
R122	1-208-911-81	s	RES, CHIP 10K (1005)
R123	1-208-895-81	s	RES, CHIP 2.2K (1005)
R124	1-208-927-81	s	RES, CHIP 47K (1005)
R125	1-208-919-81	s	RES, CHIP 22K (1005)
R126	1-208-919-81	s	RES, CHIP 22K (1005)
R127	1-208-927-81	s	RES, CHIP 47K (1005)
R128	1-208-927-81	s	RES, CHIP 47K (1005)
R129	1-208-927-81	s	RES, CHIP 47K (1005)
R130	1-208-911-81	s	RES, CHIP 10K (1005)
R131	1-208-895-81	s	RES, CHIP 2.2K (1005)
R132	1-208-907-81	s	RES, CHIP 6.8K (1005)

(SDP-12 BOARD suffix 13, 31)

Ref. No. or Q'ty	Part No.	SP	Description
R133	1-208-919-81	s	RES, CHIP 22K (1005)
R134	1-208-919-81	s	RES, CHIP 22K (1005)
R135	1-208-927-81	s	RES, CHIP 47K (1005)
R136	1-208-927-81	s	RES, CHIP 47K (1005)
R139	1-208-927-81	s	RES, CHIP 47K (1005)
R140	1-208-927-81	s	RES, CHIP 47K (1005)
R141	1-208-895-81	s	RES, CHIP 2.2K (1005)
R142	1-208-907-81	s	RES, CHIP 6.8K (1005)
R143	1-208-911-81	s	RES, CHIP 10K (1005)
R144	1-208-911-81	s	RES, CHIP 10K (1005)
R145	1-208-887-81	s	RES, CHIP 1.0K (1005)
R146	1-208-911-81	s	RES, CHIP 10K (1005)
R147	1-208-887-81	s	RES, CHIP 1.0K (1005)
R148	1-208-927-81	s	RES, CHIP 47K (1005)
R149	1-208-863-81	s	RES, CHIP 100 (1005)
R150	1-208-927-81	s	RES, CHIP 47K (1005)
R151	1-208-863-81	s	RES, CHIP 100 (1005)
R152	1-208-863-81	s	RES, CHIP 100 (1005)
R153	1-208-863-81	s	RES, CHIP 100 (1005)
R154	1-208-863-81	s	RES, CHIP 100 (1005)
R155	1-208-863-81	s	RES, CHIP 100 (1005)
R156	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R157	1-208-935-81	s	RES, CHIP 100K (1005)
R158	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R159	1-208-935-81	s	RES, CHIP 100K (1005)
R161	1-208-863-81	s	RES, CHIP 100 (1005)
R212	1-208-935-81	s	RES, CHIP 100K (1005)
R213	1-208-911-81	s	RES, CHIP 10K (1005)
R217	1-208-911-81	s	RES, CHIP 10K (1005)
R238	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R241	1-208-855-81	s	RES, CHIP 47 (1005)
R242	1-208-903-81	s	RES, CHIP 4.7K (1005)
R243	1-208-903-81	s	RES, CHIP 4.7K (1005)
R244	1-208-863-81	s	RES, CHIP 100 (1005)
R245	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R246	1-208-907-81	s	RES, CHIP 6.8K (1005)
R248	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R249	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R251	1-208-887-81	s	RES, CHIP 1.0K (1005)
R252	1-208-887-81	s	RES, CHIP 1.0K (1005)
R253	1-220-870-81	s	RES, CHIP 10 (1005)
R254	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R255	1-208-895-81	s	RES, CHIP 2.2K (1005)
R256	1-208-863-81	s	RES, CHIP 100 (1005)
R257	1-208-887-81	s	RES, CHIP 1.0K (1005)
R259	1-220-870-81	s	RES, CHIP 10 (1005)
R262	1-220-870-81	s	RES, CHIP 10 (1005)
R264	1-208-863-81	s	RES, CHIP 100 (1005)
R265	1-208-863-81	s	RES, CHIP 100 (1005)
R268	1-208-863-81	s	RES, CHIP 100 (1005)
R269	1-208-863-81	s	RES, CHIP 100 (1005)
R271	1-208-855-81	s	RES, CHIP 47 (1005)
R272	1-208-855-81	s	RES, CHIP 47 (1005)
R277	1-208-855-81	s	RES, CHIP 47 (1005)
R278	1-208-895-81	s	RES, CHIP 2.2K (1005)
R280	1-208-863-81	s	RES, CHIP 100 (1005)
R281	1-208-863-81	s	RES, CHIP 100 (1005)
R282	1-208-911-81	s	RES, CHIP 10K (1005)
R283	1-208-887-81	s	RES, CHIP 1.0K (1005)

(SDP-12 BOARD suffix 13, 31)

Ref. No. or Q'ty	Part No.	SP	Description
R284	1-208-863-81	s	RES, CHIP 100 (1005)
R285	1-208-863-81	s	RES, CHIP 100 (1005)
R286	1-208-863-81	s	RES, CHIP 100 (1005)
R287	1-208-863-81	s	RES, CHIP 100 (1005)
R288	1-208-863-81	s	RES, CHIP 100 (1005)
R289	1-208-863-81	s	RES, CHIP 100 (1005)
R290	1-208-863-81	s	RES, CHIP 100 (1005)
R291	1-208-863-81	s	RES, CHIP 100 (1005)
R292	1-208-863-81	s	RES, CHIP 100 (1005)
R293	1-220-870-81	s	RES, CHIP 10 (1005)
R297	1-220-870-81	s	RES, CHIP 10 (1005)
R298	1-208-855-81	s	RES, CHIP 47 (1005)
R300	1-208-855-81	s	RES, CHIP 47 (1005)
R301	1-208-855-81	s	RES, CHIP 47 (1005)
R302	1-208-855-81	s	RES, CHIP 47 (1005)
R303	1-208-911-81	s	RES, CHIP 10K (1005)
R304	1-208-863-81	s	RES, CHIP 100 (1005)
R305	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R306	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R401	1-220-870-81	s	RES, CHIP 10 (1005)
R403	1-208-863-81	s	RES, CHIP 100 (1005)
R404	1-208-863-81	s	RES, CHIP 100 (1005)
R405	1-208-863-81	s	RES, CHIP 100 (1005)
R406	1-220-870-81	s	RES, CHIP 10 (1005)
R407	1-220-870-81	s	RES, CHIP 10 (1005)
R408	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R409	1-220-870-81	s	RES, CHIP 10 (1005)
R410	1-208-903-81	s	RES, CHIP 4.7K (1005)
R412	1-220-870-81	s	RES, CHIP 10 (1005)
R413	1-220-870-81	s	RES, CHIP 10 (1005)
R414	1-220-870-81	s	RES, CHIP 10 (1005)
R416	1-208-863-81	s	RES, CHIP 100 (1005)
R417	1-208-863-81	s	RES, CHIP 100 (1005)
R418	1-208-863-81	s	RES, CHIP 100 (1005)
R419	1-208-863-81	s	RES, CHIP 100 (1005)
R420	1-208-863-81	s	RES, CHIP 100 (1005)
R421	1-208-863-81	s	RES, CHIP 100 (1005)
R422	1-208-863-81	s	RES, CHIP 100 (1005)
R423	1-208-863-81	s	RES, CHIP 100 (1005)
R424	1-208-935-81	s	RES, CHIP 100K (1005)
R425	1-208-863-81	s	RES, CHIP 100 (1005)
R426	1-208-863-81	s	RES, CHIP 100 (1005)
R427	1-208-935-81	s	RES, CHIP 100K (1005)
R428	1-208-863-81	s	RES, CHIP 100 (1005)
R429	1-208-863-81	s	RES, CHIP 100 (1005)
R433	1-208-855-81	s	RES, CHIP 47 (1005)
R435	1-208-863-81	s	RES, CHIP 100 (1005)
R436	1-208-863-81	s	RES, CHIP 100 (1005)
R437	1-208-863-81	s	RES, CHIP 100 (1005)
R438	1-208-863-81	s	RES, CHIP 100 (1005)
R439	1-208-863-81	s	RES, CHIP 100 (1005)
R440	1-208-863-81	s	RES, CHIP 100 (1005)
R441	1-220-870-81	s	RES, CHIP 10 (1005)
R442	1-220-870-81	s	RES, CHIP 10 (1005)
R444	1-208-863-81	s	RES, CHIP 100 (1005)
R445	1-208-863-81	s	RES, CHIP 100 (1005)
R446	1-208-863-81	s	RES, CHIP 100 (1005)
R447	1-208-863-81	s	RES, CHIP 100 (1005)
R448	1-208-863-81	s	RES, CHIP 100 (1005)

(SDP-12 BOARD suffix 13, 31)

Ref. No. or Q'ty	Part No.	SP	Description
R449	1-208-863-81	s	RES, CHIP 100 (1005)
R450	1-208-911-81	s	RES, CHIP 10K (1005)
R451	1-208-863-81	s	RES, CHIP 100 (1005)
R452	1-208-863-81	s	RES, CHIP 100 (1005)
R453	1-208-863-81	s	RES, CHIP 100 (1005)
R454	1-208-863-81	s	RES, CHIP 100 (1005)
R455	1-208-863-81	s	RES, CHIP 100 (1005)
R456	1-208-863-81	s	RES, CHIP 100 (1005)
R457	1-208-863-81	s	RES, CHIP 100 (1005)
R458	1-208-887-81	s	RES, CHIP 1.0K (1005)
R459	1-208-863-81	s	RES, CHIP 100 (1005)
R460	1-208-863-81	s	RES, CHIP 100 (1005)
R461	1-208-863-81	s	RES, CHIP 100 (1005)
R462	1-208-863-81	s	RES, CHIP 100 (1005)
R463	1-208-863-81	s	RES, CHIP 100 (1005)
R464	1-208-863-81	s	RES, CHIP 100 (1005)
R465	1-208-863-81	s	RES, CHIP 100 (1005)
R466	1-208-863-81	s	RES, CHIP 100 (1005)
R467	1-208-863-81	s	RES, CHIP 100 (1005)
R468	1-208-863-81	s	RES, CHIP 100 (1005)
R469	1-208-863-81	s	RES, CHIP 100 (1005)
R470	1-208-863-81	s	RES, CHIP 100 (1005)
R471	1-208-863-81	s	RES, CHIP 100 (1005)
R472	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R474	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R478	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R480	1-208-915-81	s	RES, CHIP 15K (1005)
R482	1-208-855-81	s	RES, CHIP 47 (1005)
R483	1-208-887-81	s	RES, CHIP 1.0K (1005)
R485	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R486	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R487	1-208-871-81	s	RES, CHIP 220 (1005)
R488	1-208-859-81	s	RES, CHIP 68 (1005)
R489	1-208-887-81	s	RES, CHIP 1.0K (1005)
R490	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R491	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R492	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R493	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R495	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R496	1-208-887-81	s	RES, CHIP 1.0K (1005)
R497	1-208-887-81	s	RES, CHIP 1.0K (1005)
R498	1-208-856-81	s	RES, CHIP 51 (1005)
R499	1-208-856-81	s	RES, CHIP 51 (1005)
R505	1-208-935-81	s	RES, CHIP 100K (1005)
R508	1-208-863-81	s	RES, CHIP 100 (1005)
R521	1-208-863-81	s	RES, CHIP 100 (1005)
R522	1-208-935-81	s	RES, CHIP 100K (1005)
R523	1-208-911-81	s	RES, CHIP 10K (1005)
R532	1-208-863-81	s	RES, CHIP 100 (1005)
R533	1-220-870-81	s	RES, CHIP 10 (1005)
R534	1-208-911-81	s	RES, CHIP 10K (1005)
R535	1-208-911-81	s	RES, CHIP 10K (1005)
R536	1-220-870-81	s	RES, CHIP 10 (1005)
R537	1-208-935-81	s	RES, CHIP 100K (1005)
R538	1-208-911-81	s	RES, CHIP 10K (1005)
R539	1-208-911-81	s	RES, CHIP 10K (1005)
R540	1-208-911-81	s	RES, CHIP 10K (1005)
R565	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R566	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(SDP-12 BOARD suffix 13, 31)

Ref. No. or Q'ty	Part No.	SP	Description
R970	1-208-863-81	s	RES, CHIP 100 (1005)
R973	1-220-870-81	s	RES, CHIP 10 (1005)
R975	1-220-870-81	s	RES, CHIP 10 (1005)
R976	1-208-855-81	s	RES, CHIP 47 (1005)
R978	1-208-855-81	s	RES, CHIP 47 (1005)
R979	1-208-855-81	s	RES, CHIP 47 (1005)
R980	1-208-911-81	s	RES, CHIP 10K (1005)
R981	1-208-863-81	s	RES, CHIP 100 (1005)
RB201	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB202	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB203	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB204	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB205	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB206	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB207	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB213	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB214	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB215	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB216	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB217	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB224	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB225	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB401	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB402	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB403	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB404	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB405	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB406	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB407	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB408	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB409	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB410	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB411	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB412	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB413	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB414	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB415	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB416	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB417	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB418	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB424	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB425	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB426	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB427	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB428	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB429	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB905	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB906	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB907	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB908	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB909	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB910	1-234-371-21	s	RES, NETWORK 47 (1005X4)
S401	1-692-271-41	s	SWITCH, SLIDE
S402	1-771-721-21	s	SWITCH, TACTILE
TP201	1-535-877-22	s	CHIP, CHECKER
TP401	1-535-877-22	s	CHIP, CHECKER
X201	1-795-872-11	s	OSCILLATOR
X401	1-795-872-11	s	OSCILLATOR

SDP-12 BOARD (suffix 12)

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1129-303-B	s	MOUNTED CIRCUIT BOARD, SDP-12
2pcs	3-364-941-01	s	SCREW (+B) (2.6X5), NYLOK
C1	1-100-620-91	s	CAP, CHIP CERAMIC 47MF B(3225)
C4	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C6	1-165-872-21	s	CAP, ELECT 47MF (5.0X6.5)
C9	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C11	1-126-394-21	s	CAP, CHIP ELECT 10MF (4X5.7)
C13	1-165-872-21	s	CAP, ELECT 47MF (5.0X6.5)
C16	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C17	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C20	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C22	1-126-394-21	s	CAP, CHIP ELECT 10MF (4X5.7)
C23	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C24	1-100-620-91	s	CAP, CHIP CERAMIC 47MF B(3225)
C25	1-100-620-91	s	CAP, CHIP CERAMIC 47MF B(3225)
C26	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C27	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C29	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C30	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C31	1-128-416-21	s	CAP, CHIP ELECT 100MF
C32	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C33	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C34	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C35	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C36	1-100-620-91	s	CAP, CHIP CERAMIC 47MF B(3225)
C37	1-100-620-91	s	CAP, CHIP CERAMIC 47MF B(3225)
C38	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C39	1-164-936-81	s	CAP, CHIP CERAMIC 680PF B 1005
C40	1-100-620-91	s	CAP, CHIP CERAMIC 47MF B(3225)
C41	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C42	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C43	1-165-872-21	s	CAP, ELECT 47MF (5.0X6.5)
C44	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C45	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C46	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C47	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C48	1-100-620-91	s	CAP, CHIP CERAMIC 47MF B(3225)
C49	1-100-620-91	s	CAP, CHIP CERAMIC 47MF B(3225)
C50	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C51	1-164-936-81	s	CAP, CHIP CERAMIC 680PF B 1005
C52	1-100-620-91	s	CAP, CHIP CERAMIC 47MF B(3225)
C53	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C55	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C56	1-165-872-21	s	CAP, ELECT 47MF (5.0X6.5)
C57	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C101	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C102	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C103	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C104	1-126-394-21	s	CAP, CHIP ELECT 10MF (4X5.7)
C105	1-126-394-21	s	CAP, CHIP ELECT 10MF (4X5.7)
C106	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C107	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C108	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C109	1-125-891-91	s	CAP, CHIP CERAMIC0.47MF B 1608
C110	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C111	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C112	1-125-891-91	s	CAP, CHIP CERAMIC0.47MF B 1608
C113	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225

(SDP-12 BOARD suffix 12)

Ref. No. or Q'ty	Part No.	SP	Description
C114	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C115	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C116	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C117	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C118	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C119	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C120	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C121	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C122	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C123	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C210	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C218	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C221	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C222	1-216-864-91	s	CONDUCTOR, CHIP (1608)
C223	1-216-864-91	s	CONDUCTOR, CHIP (1608)
C225	1-100-507-91	s	CAP, CERAMIC 4.7MF C (1608)
C226	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C227	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C228	1-100-507-91	s	CAP, CERAMIC 4.7MF C (1608)
C229	1-164-939-81	s	CAP, CHIPCERAMIC 2200PF B 1005
C230	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C231	1-164-939-81	s	CAP, CHIPCERAMIC 2200PF B 1005
C232	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C233	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C234	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C235	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C236	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C237	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C238	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C239	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C246	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C248	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C249	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C250	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C251	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C252	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C253	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C254	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C255	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C256	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C257	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C258	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C259	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C260	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C261	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C262	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C263	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C264	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C265	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C266	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C267	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C268	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C269	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C270	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C271	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C274	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C276	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C277	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C279	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(SDP-12 BOARD suffix 12)

Ref. No. or Q'ty	Part No.	SP	Description
C404	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C405	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C406	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C407	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C408	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C409	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C410	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C412	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C413	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C415	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C416	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C417	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C418	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C420	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C421	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C422	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C423	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C424	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C425	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C426	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C427	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C428	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C429	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C430	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C431	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C432	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C433	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C434	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C435	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C436	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C437	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C438	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C439	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C440	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C441	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C442	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C445	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C446	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C447	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C448	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C449	1-164-939-81	s	CAP, CHIPCERAMIC 2200PF B 1005
C450	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C451	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C452	1-100-507-91	s	CAP, CERAMIC 4.7MF C (1608)
C453	1-100-507-91	s	CAP, CERAMIC 4.7MF C (1608)
C454	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C455	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C456	1-100-507-91	s	CAP, CERAMIC 4.7MF C (1608)
C457	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C458	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C459	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C460	1-100-506-91	s	CAP, CERAMIC 1MF C (1005)
C461	1-216-864-91	s	CONDUCTOR, CHIP (1608)
C462	1-216-864-91	s	CONDUCTOR, CHIP (1608)
C475	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C479	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C482	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C483	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C484	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(SDP-12 BOARD suffix 12)

Ref. No. or Q'ty	Part No.	SP	Description
C943	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C944	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C945	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C949	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
CN103	1-695-480-21	o	PIN, CONNECTOR (PC BOARD) 2P
CN104	1-770-470-21	o	PIN, CONNECTOR (PC BOARD) 6P
CN105	1-815-921-11	s	JACK, MODULAR
CN402	1-764-080-21	o	PIN, CONNECTOR (PC BOARD) 8P
CP201	1-417-612-11	s	CONVERSION MODULE,O/E,OE-301
CP401	1-417-611-11	s	CONVERSION MODULE,E/O,EO-300
D1	8-719-017-03	s	DIODE 02DZ4.7-TPH3
D2	8-719-017-03	s	DIODE 02DZ4.7-TPH3
D5	8-719-024-81	s	DIODE 1SS300-TE85L
D101	8-719-024-81	s	DIODE 1SS300-TE85L
D102	8-719-024-81	s	DIODE 1SS300-TE85L
D103	8-719-024-81	s	DIODE 1SS300-TE85L
E1	1-535-877-22	s	CHIP, CHECKER
E2	1-535-877-22	s	CHIP, CHECKER
FB1	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB2	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB3	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB4	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB5	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB6	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB101	1-414-554-21	s	FERRITE, EMI (SMD) (1608)
FB203	1-414-554-21	s	FERRITE, EMI (SMD) (1608)
FB204	1-414-554-21	s	FERRITE, EMI (SMD) (1608)
FB205	1-414-554-21	s	FERRITE, EMI (SMD) (1608)
FB206	1-414-554-21	s	FERRITE, EMI (SMD) (1608)
FB207	1-414-554-21	s	FERRITE, EMI (SMD) (1608)
FB208	1-414-554-21	s	FERRITE, EMI (SMD) (1608)
FB209	1-414-554-21	s	FERRITE, EMI (SMD) (1608)
FB210	1-414-554-21	s	FERRITE, EMI (SMD) (1608)
FB211	1-414-554-21	s	FERRITE, EMI (SMD) (1608)
FB401	1-414-554-21	s	FERRITE, EMI (SMD) (1608)
FB402	1-414-554-21	s	FERRITE, EMI (SMD) (1608)
FB403	1-414-554-21	s	FERRITE, EMI (SMD) (1608)
FB404	1-414-554-21	s	FERRITE, EMI (SMD) (1608)
FB405	1-414-554-21	s	FERRITE, EMI (SMD) (1608)
FB406	1-414-554-21	s	FERRITE, EMI (SMD) (1608)
FB407	1-414-554-21	s	FERRITE, EMI (SMD) (1608)
FB408	1-414-554-21	s	FERRITE, EMI (SMD) (1608)
FB409	1-414-554-21	s	FERRITE, EMI (SMD) (1608)
FB410	1-414-554-21	s	FERRITE, EMI (SMD) (1608)
IC1	8-759-327-01	s	IC NJM062V(TE2)
IC2	8-759-327-01	s	IC NJM062V(TE2)
IC3	6-704-976-01	s	IC ADR381ARTZ-REEL7
IC4	8-759-327-01	s	IC NJM062V(TE2)
IC5	6-706-482-01	s	IC TC7SH00FU(T5RSOYJF)
IC6	6-701-572-01	s	IC TPS54610PWPR
IC7	6-701-572-01	s	IC TPS54610PWPR
IC9	8-759-338-95	s	IC NJM2903V(TE2)
IC10	8-759-338-95	s	IC NJM2903V(TE2)
IC101	8-759-338-95	s	IC NJM2903V(TE2)
IC102	8-759-338-95	s	IC NJM2903V(TE2)
IC103	8-759-471-85	s	IC 74VHC00MTCX

(SDP-12 BOARD suffix 12)

Ref. No. or Q'ty	Part No.	SP	Description
IC104	8-759-327-01	s	IC NJM062V(TE2)
IC105	8-759-327-01	s	IC NJM062V(TE2)
IC106	8-759-346-27	s	IC LM45BIM3X
IC107	8-759-523-01	s	IC TC74HC4052AFT(EL)
IC202	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC204	6-709-052-01	s	IC GS1561-CFE3
IC205	8-759-592-44	s	IC TC7SZ04FU(TE85R)
IC207	8-759-472-43	s	IC 74VHC245MTCX
IC209	8-759-592-42	s	IC TC7SZ00FU(TE85R)
IC210	6-700-804-01	s	IC SN74LVC574APWR
IC211	6-700-804-01	s	IC SN74LVC574APWR
IC212	6-700-804-01	s	IC SN74LVC574APWR
IC213	8-759-592-42	s	IC TC7SZ00FU(TE85R)
IC401	6-700-804-01	s	IC SN74LVC574APWR
IC402	6-700-804-01	s	IC SN74LVC574APWR
IC403	6-700-804-01	s	IC SN74LVC574APWR
IC404	8-759-592-44	s	IC TC7SZ04FU(TE85R)
IC405	8-759-472-43	s	IC 74VHC245MTCX
IC407	8-759-363-26	s	IC RN5VD28AA-TL-FA
IC408	8-759-471-96	s	IC 74VHC08MTCX
IC410	6-703-693-01	s	IC GS1532-CFE3
IC413	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC414	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC415	8-759-669-43	s	IC SN74LVC157APWR-12
IC421	8-759-592-44	s	IC TC7SZ04FU(TE85R)
IC422	8-759-592-44	s	IC TC7SZ04FU(TE85R)
IC423	8-759-592-44	s	IC TC7SZ04FU(TE85R)
IC906	6-700-804-01	s	IC SN74LVC574APWR
IC907	6-700-804-01	s	IC SN74LVC574APWR
IC908	6-700-804-01	s	IC SN74LVC574APWR
IC912	8-759-592-42	s	IC TC7SZ00FU(TE85R)
IC913	8-759-592-42	s	IC TC7SZ00FU(TE85R)
JC101	1-218-990-81	s	CONDUCTOR, CHIP (1005)
JC102	1-218-990-81	s	CONDUCTOR, CHIP (1005)
L1	1-457-205-21	s	COIL, CHOKE (SMD) 3.3UH
L2	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L3	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L4	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L5	1-416-344-21	s	COIL, CHOKE 10UH
L6	1-416-344-21	s	COIL, CHOKE 10UH
L7	1-416-344-21	s	COIL, CHOKE 10UH
L202	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L203	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L204	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L205	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L401	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L402	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L403	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
Q1	8-729-035-99	s	TRANSISTOR 2SA1615-Z-E2
Q2	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q3	8-729-035-99	s	TRANSISTOR 2SA1615-Z-E2
Q4	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q5	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q6	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q7	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q8	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q9	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q101	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR

(SDP-12 BOARD suffix 12)

Ref. No. or Q'ty	Part No.	SP	Description
Q102	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q103	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q104	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q105	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q106	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q205	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q206	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q207	8-729-041-23	s	TRANSISTOR NDS356AP
Q407	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q408	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q409	8-729-041-23	s	TRANSISTOR NDS356AP
R1	1-208-863-81	s	RES, CHIP 100 (1005)
R2	1-208-871-81	s	RES, CHIP 220 (1005)
R3	1-208-895-81	s	RES, CHIP 2.2K (1005)
R4	1-208-923-81	s	RES, CHIP 33K (1005)
R5	1-208-923-81	s	RES, CHIP 33K (1005)
R6	1-208-863-81	s	RES, CHIP 100 (1005)
R7	1-208-871-81	s	RES, CHIP 220 (1005)
R8	1-208-895-81	s	RES, CHIP 2.2K (1005)
R9	1-208-923-81	s	RES, CHIP 33K (1005)
R10	1-208-923-81	s	RES, CHIP 33K (1005)
R11	1-208-919-81	s	RES, CHIP 22K (1005)
R12	1-208-923-81	s	RES, CHIP 33K (1005)
R13	1-208-911-81	s	RES, CHIP 10K (1005)
R14	1-208-871-81	s	RES, CHIP 220 (1005)
R15	1-208-871-81	s	RES, CHIP 220 (1005)
R16	1-208-923-81	s	RES, CHIP 33K (1005)
R17	1-208-923-81	s	RES, CHIP 33K (1005)
R18	1-208-931-81	s	RES, CHIP 68K (1005)
R19	1-208-931-81	s	RES, CHIP 68K (1005)
R20	1-208-927-81	s	RES, CHIP 47K (1005)
R21	1-208-903-81	s	RES, CHIP 4.7K (1005)
R22	1-208-939-81	s	RES, CHIP 150K (1005)
R23	1-208-923-81	s	RES, CHIP 33K (1005)
R24	1-208-927-81	s	RES, CHIP 47K (1005)
R25	1-208-927-81	s	RES, CHIP 47K (1005)
R26	1-208-923-81	s	RES, CHIP 33K (1005)
R27	1-208-927-81	s	RES, CHIP 47K (1005)
R28	1-208-887-81	s	RES, CHIP 1.0K (1005)
R29	1-208-887-81	s	RES, CHIP 1.0K (1005)
R30	1-208-887-81	s	RES, CHIP 1.0K (1005)
R31	1-208-911-81	s	RES, CHIP 10K (1005)
R32	1-208-891-81	s	RES, CHIP 1.5K (1005)
R33	1-208-863-81	s	RES, CHIP 100 (1005)
R34	1-208-911-81	s	RES, CHIP 10K (1005)
R35	1-208-907-81	s	RES, CHIP 6.8K (1005)
R36	1-208-907-81	s	RES, CHIP 6.8K (1005)
R37	1-208-887-81	s	RES, CHIP 1.0K (1005)
R38	1-208-935-81	s	RES, CHIP 100K (1005)
R39	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R40	1-208-871-81	s	RES, CHIP 220 (1005)
R41	1-208-863-81	s	RES, CHIP 100 (1005)
R42	1-208-891-81	s	RES, CHIP 1.5K (1005)
R43	1-208-863-81	s	RES, CHIP 100 (1005)
R44	1-208-911-81	s	RES, CHIP 10K (1005)
R45	1-208-907-81	s	RES, CHIP 6.8K (1005)
R46	1-208-891-81	s	RES, CHIP 1.5K (1005)
R47	1-208-891-81	s	RES, CHIP 1.5K (1005)

(SDP-12 BOARD suffix 12)

Ref. No. or Q'ty	Part No.	SP	Description
R51	1-208-923-81	s	RES, CHIP 33K (1005)
R52	1-208-895-81	s	RES, CHIP 2.2K (1005)
R53	1-208-915-81	s	RES, CHIP 15K (1005)
R54	1-208-919-81	s	RES, CHIP 22K (1005)
R55	1-208-911-81	s	RES, CHIP 10K (1005)
R56	1-208-895-81	s	RES, CHIP 2.2K (1005)
R57	1-208-915-81	s	RES, CHIP 15K (1005)
R58	1-208-919-81	s	RES, CHIP 22K (1005)
R59	1-208-907-81	s	RES, CHIP 6.8K (1005)
R60	1-208-927-81	s	RES, CHIP 47K (1005)
R61	1-208-931-81	s	RES, CHIP 68K (1005)
R62	1-208-911-81	s	RES, CHIP 10K (1005)
R63	1-208-907-81	s	RES, CHIP 6.8K (1005)
R64	1-208-915-81	s	RES, CHIP 15K (1005)
R65	1-208-895-81	s	RES, CHIP 2.2K (1005)
R66	1-208-911-81	s	RES, CHIP 10K (1005)
R67	1-208-911-81	s	RES, CHIP 10K (1005)
R68	1-208-911-81	s	RES, CHIP 10K (1005)
R69	1-208-871-81	s	RES, CHIP 220 (1005)
R70	1-208-867-81	s	RES, CHIP 150 (1005)
R71	1-208-887-81	s	RES, CHIP 1.0K (1005)
R72	1-208-871-81	s	RES, CHIP 220 (1005)
R73	1-208-903-81	s	RES, CHIP 4.7K (1005)
R74	1-208-927-81	s	RES, CHIP 47K (1005)
R75	1-208-895-81	s	RES, CHIP 2.2K (1005)
R76	1-208-895-81	s	RES, CHIP 2.2K (1005)
R101	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R102	1-208-887-81	s	RES, CHIP 1.0K (1005)
R103	1-208-911-81	s	RES, CHIP 10K (1005)
R104	1-208-911-81	s	RES, CHIP 10K (1005)
R105	1-208-919-81	s	RES, CHIP 22K (1005)
R106	1-208-879-81	s	RES, CHIP 470 (1005)
R107	1-208-903-81	s	RES, CHIP 4.7K (1005)
R108	1-208-903-81	s	RES, CHIP 4.7K (1005)
R109	1-208-899-81	s	RES, CHIP 3.3K (1005)
R110	1-208-875-81	s	RES, CHIP 330 (1005)
R111	1-208-903-81	s	RES, CHIP 4.7K (1005)
R112	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R113	1-208-907-81	s	RES, CHIP 6.8K (1005)
R114	1-208-891-81	s	RES, CHIP 1.5K (1005)
R115	1-208-911-81	s	RES, CHIP 10K (1005)
R116	1-208-911-81	s	RES, CHIP 10K (1005)
R117	1-208-911-81	s	RES, CHIP 10K (1005)
R118	1-208-895-81	s	RES, CHIP 2.2K (1005)
R119	1-208-895-81	s	RES, CHIP 2.2K (1005)
R120	1-208-935-81	s	RES, CHIP 100K (1005)
R121	1-208-907-81	s	RES, CHIP 6.8K (1005)
R122	1-208-911-81	s	RES, CHIP 10K (1005)
R123	1-208-895-81	s	RES, CHIP 2.2K (1005)
R124	1-208-927-81	s	RES, CHIP 47K (1005)
R125	1-208-919-81	s	RES, CHIP 22K (1005)
R126	1-208-919-81	s	RES, CHIP 22K (1005)
R127	1-208-927-81	s	RES, CHIP 47K (1005)
R128	1-208-927-81	s	RES, CHIP 47K (1005)
R129	1-208-927-81	s	RES, CHIP 47K (1005)
R130	1-208-911-81	s	RES, CHIP 10K (1005)
R131	1-208-895-81	s	RES, CHIP 2.2K (1005)
R132	1-208-907-81	s	RES, CHIP 6.8K (1005)
R133	1-208-919-81	s	RES, CHIP 22K (1005)

(SDP-12 BOARD suffix 12)

Ref. No. or Q'ty	Part No.	SP	Description
R134	1-208-919-81	s	RES, CHIP 22K (1005)
R135	1-208-927-81	s	RES, CHIP 47K (1005)
R136	1-208-927-81	s	RES, CHIP 47K (1005)
R139	1-208-927-81	s	RES, CHIP 47K (1005)
R140	1-208-927-81	s	RES, CHIP 47K (1005)
R141	1-208-895-81	s	RES, CHIP 2.2K (1005)
R142	1-208-907-81	s	RES, CHIP 6.8K (1005)
R143	1-208-911-81	s	RES, CHIP 10K (1005)
R144	1-208-911-81	s	RES, CHIP 10K (1005)
R145	1-208-887-81	s	RES, CHIP 1.0K (1005)
R146	1-208-911-81	s	RES, CHIP 10K (1005)
R147	1-208-887-81	s	RES, CHIP 1.0K (1005)
R148	1-208-927-81	s	RES, CHIP 47K (1005)
R149	1-208-863-81	s	RES, CHIP 100 (1005)
R150	1-208-927-81	s	RES, CHIP 47K (1005)
R151	1-208-863-81	s	RES, CHIP 100 (1005)
R152	1-208-863-81	s	RES, CHIP 100 (1005)
R153	1-208-863-81	s	RES, CHIP 100 (1005)
R154	1-208-863-81	s	RES, CHIP 100 (1005)
R155	1-208-863-81	s	RES, CHIP 100 (1005)
R156	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R157	1-208-935-81	s	RES, CHIP 100K (1005)
R158	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R159	1-208-935-81	s	RES, CHIP 100K (1005)
R161	1-208-863-81	s	RES, CHIP 100 (1005)
R212	1-208-935-81	s	RES, CHIP 100K (1005)
R213	1-208-911-81	s	RES, CHIP 10K (1005)
R217	1-208-911-81	s	RES, CHIP 10K (1005)
R238	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R241	1-208-855-81	s	RES, CHIP 47 (1005)
R242	1-208-903-81	s	RES, CHIP 4.7K (1005)
R243	1-208-903-81	s	RES, CHIP 4.7K (1005)
R244	1-208-863-81	s	RES, CHIP 100 (1005)
R245	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R246	1-208-907-81	s	RES, CHIP 6.8K (1005)
R248	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R249	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R251	1-208-887-81	s	RES, CHIP 1.0K (1005)
R252	1-208-887-81	s	RES, CHIP 1.0K (1005)
R253	1-220-870-81	s	RES, CHIP 10 (1005)
R254	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R255	1-208-895-81	s	RES, CHIP 2.2K (1005)
R256	1-208-863-81	s	RES, CHIP 100 (1005)
R257	1-208-887-81	s	RES, CHIP 1.0K (1005)
R259	1-220-870-81	s	RES, CHIP 10 (1005)
R262	1-220-870-81	s	RES, CHIP 10 (1005)
R264	1-208-863-81	s	RES, CHIP 100 (1005)
R265	1-208-863-81	s	RES, CHIP 100 (1005)
R268	1-208-863-81	s	RES, CHIP 100 (1005)
R269	1-208-863-81	s	RES, CHIP 100 (1005)
R271	1-208-855-81	s	RES, CHIP 47 (1005)
R272	1-208-855-81	s	RES, CHIP 47 (1005)
R277	1-208-855-81	s	RES, CHIP 47 (1005)
R278	1-208-895-81	s	RES, CHIP 2.2K (1005)
R280	1-208-863-81	s	RES, CHIP 100 (1005)
R281	1-208-863-81	s	RES, CHIP 100 (1005)
R282	1-208-911-81	s	RES, CHIP 10K (1005)
R283	1-208-887-81	s	RES, CHIP 1.0K (1005)
R284	1-208-863-81	s	RES, CHIP 100 (1005)

(SDP-12 BOARD suffix 12)

Ref. No. or Q'ty	Part No.	SP	Description
R285	1-208-863-81	s	RES, CHIP 100 (1005)
R286	1-208-863-81	s	RES, CHIP 100 (1005)
R287	1-208-863-81	s	RES, CHIP 100 (1005)
R288	1-208-863-81	s	RES, CHIP 100 (1005)
R289	1-208-863-81	s	RES, CHIP 100 (1005)
R290	1-208-863-81	s	RES, CHIP 100 (1005)
R291	1-208-863-81	s	RES, CHIP 100 (1005)
R292	1-208-863-81	s	RES, CHIP 100 (1005)
R293	1-220-870-81	s	RES, CHIP 10 (1005)
R297	1-220-870-81	s	RES, CHIP 10 (1005)
R298	1-208-855-81	s	RES, CHIP 47 (1005)
R300	1-208-855-81	s	RES, CHIP 47 (1005)
R301	1-208-855-81	s	RES, CHIP 47 (1005)
R302	1-208-855-81	s	RES, CHIP 47 (1005)
R303	1-208-911-81	s	RES, CHIP 10K (1005)
R304	1-208-863-81	s	RES, CHIP 100 (1005)
R305	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R306	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R401	1-220-870-81	s	RES, CHIP 10 (1005)
R403	1-208-863-81	s	RES, CHIP 100 (1005)
R404	1-208-863-81	s	RES, CHIP 100 (1005)
R405	1-208-863-81	s	RES, CHIP 100 (1005)
R406	1-220-870-81	s	RES, CHIP 10 (1005)
R407	1-220-870-81	s	RES, CHIP 10 (1005)
R408	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R409	1-220-870-81	s	RES, CHIP 10 (1005)
R410	1-208-903-81	s	RES, CHIP 4.7K (1005)
R412	1-220-870-81	s	RES, CHIP 10 (1005)
R413	1-220-870-81	s	RES, CHIP 10 (1005)
R414	1-220-870-81	s	RES, CHIP 10 (1005)
R416	1-208-863-81	s	RES, CHIP 100 (1005)
R417	1-208-863-81	s	RES, CHIP 100 (1005)
R418	1-208-863-81	s	RES, CHIP 100 (1005)
R419	1-208-863-81	s	RES, CHIP 100 (1005)
R420	1-208-863-81	s	RES, CHIP 100 (1005)
R421	1-208-863-81	s	RES, CHIP 100 (1005)
R422	1-208-863-81	s	RES, CHIP 100 (1005)
R423	1-208-863-81	s	RES, CHIP 100 (1005)
R424	1-208-935-81	s	RES, CHIP 100K (1005)
R425	1-208-863-81	s	RES, CHIP 100 (1005)
R426	1-208-863-81	s	RES, CHIP 100 (1005)
R427	1-208-935-81	s	RES, CHIP 100K (1005)
R428	1-208-863-81	s	RES, CHIP 100 (1005)
R429	1-208-863-81	s	RES, CHIP 100 (1005)
R433	1-208-855-81	s	RES, CHIP 47 (1005)
R435	1-208-863-81	s	RES, CHIP 100 (1005)
R436	1-208-863-81	s	RES, CHIP 100 (1005)
R437	1-208-863-81	s	RES, CHIP 100 (1005)
R438	1-208-863-81	s	RES, CHIP 100 (1005)
R439	1-208-863-81	s	RES, CHIP 100 (1005)
R440	1-208-863-81	s	RES, CHIP 100 (1005)
R441	1-220-870-81	s	RES, CHIP 10 (1005)
R442	1-220-870-81	s	RES, CHIP 10 (1005)
R444	1-208-863-81	s	RES, CHIP 100 (1005)
R445	1-208-863-81	s	RES, CHIP 100 (1005)
R446	1-208-863-81	s	RES, CHIP 100 (1005)
R447	1-208-863-81	s	RES, CHIP 100 (1005)
R448	1-208-863-81	s	RES, CHIP 100 (1005)
R449	1-208-863-81	s	RES, CHIP 100 (1005)

(SDP-12 BOARD suffix 12)

Ref. No. or Q'ty	Part No.	SP	Description
R450	1-208-911-81	s	RES, CHIP 10K (1005)
R451	1-208-863-81	s	RES, CHIP 100 (1005)
R452	1-208-863-81	s	RES, CHIP 100 (1005)
R453	1-208-863-81	s	RES, CHIP 100 (1005)
R454	1-208-863-81	s	RES, CHIP 100 (1005)
R455	1-208-863-81	s	RES, CHIP 100 (1005)
R456	1-208-863-81	s	RES, CHIP 100 (1005)
R457	1-208-863-81	s	RES, CHIP 100 (1005)
R458	1-208-887-81	s	RES, CHIP 1.0K (1005)
R459	1-208-863-81	s	RES, CHIP 100 (1005)
R460	1-208-863-81	s	RES, CHIP 100 (1005)
R461	1-208-863-81	s	RES, CHIP 100 (1005)
R462	1-208-863-81	s	RES, CHIP 100 (1005)
R463	1-208-863-81	s	RES, CHIP 100 (1005)
R464	1-208-863-81	s	RES, CHIP 100 (1005)
R465	1-208-863-81	s	RES, CHIP 100 (1005)
R466	1-208-863-81	s	RES, CHIP 100 (1005)
R467	1-208-863-81	s	RES, CHIP 100 (1005)
R468	1-208-863-81	s	RES, CHIP 100 (1005)
R469	1-208-863-81	s	RES, CHIP 100 (1005)
R470	1-208-863-81	s	RES, CHIP 100 (1005)
R471	1-208-863-81	s	RES, CHIP 100 (1005)
R472	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R474	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R478	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R480	1-208-915-81	s	RES, CHIP 15K (1005)
R482	1-208-855-81	s	RES, CHIP 47 (1005)
R483	1-208-887-81	s	RES, CHIP 1.0K (1005)
R485	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R486	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R487	1-208-871-81	s	RES, CHIP 220 (1005)
R488	1-208-859-81	s	RES, CHIP 68 (1005)
R489	1-208-887-81	s	RES, CHIP 1.0K (1005)
R490	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R491	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R492	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R493	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R495	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R496	1-208-887-81	s	RES, CHIP 1.0K (1005)
R497	1-208-887-81	s	RES, CHIP 1.0K (1005)
R498	1-208-856-81	s	RES, CHIP 51 (1005)
R499	1-208-856-81	s	RES, CHIP 51 (1005)
R505	1-208-935-81	s	RES, CHIP 100K (1005)
R508	1-208-863-81	s	RES, CHIP 100 (1005)
R521	1-208-863-81	s	RES, CHIP 100 (1005)
R522	1-208-935-81	s	RES, CHIP 100K (1005)
R523	1-208-911-81	s	RES, CHIP 10K (1005)
R532	1-208-863-81	s	RES, CHIP 100 (1005)
R533	1-220-870-81	s	RES, CHIP 10 (1005)
R534	1-208-911-81	s	RES, CHIP 10K (1005)
R535	1-208-911-81	s	RES, CHIP 10K (1005)
R536	1-220-870-81	s	RES, CHIP 10 (1005)
R537	1-208-935-81	s	RES, CHIP 100K (1005)
R538	1-208-911-81	s	RES, CHIP 10K (1005)
R539	1-208-911-81	s	RES, CHIP 10K (1005)
R540	1-208-911-81	s	RES, CHIP 10K (1005)
R565	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R566	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R970	1-208-863-81	s	RES, CHIP 100 (1005)

(SDP-12 BOARD suffix 12)

Ref. No. or Q'ty	Part No.	SP	Description
R973	1-220-870-81	s	RES, CHIP 10 (1005)
R975	1-220-870-81	s	RES, CHIP 10 (1005)
R976	1-208-855-81	s	RES, CHIP 47 (1005)
R978	1-208-855-81	s	RES, CHIP 47 (1005)
R979	1-208-855-81	s	RES, CHIP 47 (1005)
R980	1-208-911-81	s	RES, CHIP 10K (1005)
R981	1-208-863-81	s	RES, CHIP 100 (1005)
RB201	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB202	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB203	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB204	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB205	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB206	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB207	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB213	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB214	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB215	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB216	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB217	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB224	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB225	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB401	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB402	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB403	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB404	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB405	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB406	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB407	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB408	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB409	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB410	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB411	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB412	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB413	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB414	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB415	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB416	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB417	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB418	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB424	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB425	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB426	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB427	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB428	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB429	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB905	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB906	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB907	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB908	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB909	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB910	1-234-371-21	s	RES, NETWORK 47 (1005X4)
S401	1-692-271-41	s	SWITCH, SLIDE
S402	1-771-721-21	s	SWITCH, TACTILE
TP201	1-535-877-22	s	CHIP, CHECKER
TP401	1-535-877-22	s	CHIP, CHECKER
X201	1-795-872-11	s	OSCILLATOR
X401	1-795-872-11	s	OSCILLATOR

SDP-12 BOARD (suffix 11)

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1129-303-A	s	MOUNTED CIRCUIT BOARD, SDP-12
C1	1-100-620-91	s	CAPACITOR, CHIP 47MF(3225)
C4	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C6	1-165-872-21	s	CAPACITOR,SOLID ELECT 47MF
C9	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C11	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C13	1-165-872-21	s	CAPACITOR,SOLID ELECT 47MF
C16	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C17	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C20	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C22	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C23	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C24	1-100-620-91	s	CAPACITOR, CHIP 47MF(3225)
C25	1-100-620-91	s	CAPACITOR, CHIP 47MF(3225)
C26	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C27	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C29	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C30	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C31	1-128-416-11	s	CAPACITOR ELECT 100MF/16V(105C
C32	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C33	1-119-923-11	s	CAPACITOR,CHIP CERAMIC 0.047MF
C34	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C35	1-119-923-11	s	CAPACITOR,CHIP CERAMIC 0.047MF
C36	1-100-620-91	s	CAPACITOR, CHIP 47MF(3225)
C37	1-100-620-91	s	CAPACITOR, CHIP 47MF(3225)
C38	1-107-819-11	s	CAP,CERAMIC 22000PF/16V(1005)
C39	1-164-936-11	s	CAPACITOR,CHIP CERAMIC 680PF
C40	1-100-620-91	s	CAPACITOR, CHIP 47MF(3225)
C41	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C42	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C43	1-165-872-21	s	CAPACITOR,SOLID ELECT 47MF
C44	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C45	1-119-923-11	s	CAPACITOR,CHIP CERAMIC 0.047MF
C46	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C47	1-119-923-11	s	CAPACITOR,CHIP CERAMIC 0.047MF
C48	1-100-620-91	s	CAPACITOR, CHIP 47MF(3225)
C49	1-100-620-91	s	CAPACITOR, CHIP 47MF(3225)
C50	1-107-819-11	s	CAP,CERAMIC 22000PF/16V(1005)
C51	1-164-936-11	s	CAPACITOR,CHIP CERAMIC 680PF
C52	1-100-620-91	s	CAPACITOR, CHIP 47MF(3225)
C53	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C54	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C55	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C56	1-165-872-21	s	CAPACITOR,SOLID ELECT 47MF
C57	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C101	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C102	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C103	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C104	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C105	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C106	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C107	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C108	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C109	1-125-891-11	s	CAPACITOR CERAMIC 0.47MF/10V
C110	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C111	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C112	1-125-891-11	s	CAPACITOR CERAMIC 0.47MF/10V
C113	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225

(SDP-12 BOARD suffix 11)

Ref. No. or Q'ty	Part No.	SP	Description
C114	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C115	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C116	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C117	1-164-850-11	s	CAPACITOR,CHIP CERAMIC 10PF/50
C118	1-164-850-11	s	CAPACITOR,CHIP CERAMIC 10PF/50
C119	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C120	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C121	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C122	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C123	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C210	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C218	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C221	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C222	1-216-864-11	s	CONDUCTOR, CHIP (1608)
C223	1-216-864-11	s	CONDUCTOR, CHIP (1608)
C225	1-100-507-91	s	CAPACITOR,CERAMIC4.7MF C(1608)
C226	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C227	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C228	1-100-507-91	s	CAPACITOR,CERAMIC4.7MF C(1608)
C229	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C230	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C231	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C232	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C233	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C234	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C235	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C236	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C237	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C238	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C239	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C246	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C248	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C249	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C250	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C251	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C252	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C253	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C254	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C255	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C256	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C257	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C258	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C259	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C260	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C261	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C262	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C263	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C264	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C265	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C266	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C267	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C268	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C269	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C270	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C271	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C274	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C276	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C277	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C279	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V

(SDP-12 BOARD suffix 11)

Ref. No. or Q'ty	Part No.	SP	Description
C404	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C405	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C406	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C407	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C408	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C409	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C410	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C412	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C413	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C415	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C416	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C417	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C418	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C420	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C421	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C422	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C423	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C424	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C425	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C426	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C427	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C428	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C429	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C430	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C431	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C432	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C433	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C434	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C435	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C436	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C437	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C438	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C439	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C440	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C441	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C442	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C445	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C446	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C447	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C448	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C449	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C450	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C451	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C452	1-100-507-91	s	CAPACITOR,CERAMIC4.7MF C(1608)
C453	1-100-507-91	s	CAPACITOR,CERAMIC4.7MF C(1608)
C454	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C455	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C456	1-100-507-91	s	CAPACITOR,CERAMIC4.7MF C(1608)
C457	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C458	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C459	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C460	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C461	1-216-864-11	s	CONDUCTOR, CHIP (1608)
C462	1-216-864-11	s	CONDUCTOR, CHIP (1608)
C475	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C479	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C482	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C483	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C484	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V

(SDP-12 BOARD suffix 11)

Ref. No. or Q'ty	Part No.	SP	Description
CN103	1-695-480-21	o	PIN, CONNECTOR (PC BOARD) 2P
CN104	1-770-470-21	o	PIN, CONNECTOR (PC BOARD) 6P
CN105	1-815-921-11	s	JACK, MODULAR
CN402	1-764-080-21	o	PIN, CONNECTOR (PC BOARD) 8P
CP201	1-417-612-11	s	CONVERSION MODULE,O/E,OE-301
CP401	1-417-611-11	s	CONVERSION MODULE,E/O,EO-300
D1	8-719-017-03	s	DIODE 02DZ4.7-TPH3
D2	8-719-017-03	s	DIODE 02DZ4.7-TPH3
D5	8-719-024-81	s	DIODE 1SS300-TE85L
D101	8-719-024-81	s	DIODE 1SS300-TE85L
D102	8-719-024-81	s	DIODE 1SS300-TE85L
D103	8-719-024-81	s	DIODE 1SS300-TE85L
E1	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
E2	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
FB1	1-469-094-21	s	FERRITE, EMI (SMD)
FB2	1-469-094-21	s	FERRITE, EMI (SMD)
FB3	1-469-094-21	s	FERRITE, EMI (SMD)
FB4	1-469-094-21	s	FERRITE, EMI (SMD)
FB5	1-469-094-21	s	FERRITE, EMI (SMD)
FB6	1-469-094-21	s	FERRITE, EMI (SMD)
FB101	1-414-554-21	s	FERRITE, EMI(SMD)
FB203	1-414-554-21	s	FERRITE, EMI(SMD)
FB204	1-414-554-21	s	FERRITE, EMI(SMD)
FB205	1-414-554-21	s	FERRITE, EMI(SMD)
FB206	1-414-554-21	s	FERRITE, EMI(SMD)
FB207	1-414-554-21	s	FERRITE, EMI(SMD)
FB208	1-414-554-21	s	FERRITE, EMI(SMD)
FB209	1-414-554-21	s	FERRITE, EMI(SMD)
FB210	1-414-554-21	s	FERRITE, EMI(SMD)
FB211	1-414-554-21	s	FERRITE, EMI(SMD)
FB401	1-414-554-21	s	FERRITE, EMI(SMD)
FB402	1-414-554-21	s	FERRITE, EMI(SMD)
FB403	1-414-554-21	s	FERRITE, EMI(SMD)
FB404	1-414-554-21	s	FERRITE, EMI(SMD)
FB405	1-414-554-21	s	FERRITE, EMI(SMD)
FB406	1-414-554-21	s	FERRITE, EMI(SMD)
FB407	1-414-554-21	s	FERRITE, EMI(SMD)
FB408	1-414-554-21	s	FERRITE, EMI(SMD)
FB409	1-414-554-21	s	FERRITE, EMI(SMD)
FB410	1-414-554-21	s	FERRITE, EMI(SMD)
IC1	8-759-327-01	s	IC NJM062V-TE2
IC2	8-759-327-01	s	IC NJM062V-TE2
IC3	6-704-976-01	s	IC ADR381ART-REEL7
IC4	8-759-327-01	s	IC NJM062V-TE2
IC5	6-706-482-01	s	IC TC7SH00FU(T5RSOYJF)
IC6	6-701-572-01	s	IC TPS54610PWPR
IC7	6-701-572-01	s	IC TPS54610PWPR
IC9	8-759-338-95	s	IC NJM2903V (TE2)
IC10	8-759-338-95	s	IC NJM2903V (TE2)
IC101	8-759-338-95	s	IC NJM2903V (TE2)
IC102	8-759-338-95	s	IC NJM2903V (TE2)
IC103	8-759-471-85	s	IC 74VHC00MTCX
IC104	8-759-327-01	s	IC NJM062V-TE2
IC105	8-759-327-01	s	IC NJM062V-TE2
IC106	8-759-346-27	s	IC LM45BIM3X
IC107	8-759-833-99	s	IC MC74HC4052ADTR2

(SDP-12 BOARD suffix 11)

Ref. No. or Q'ty	Part No.	SP	Description
IC202	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC204	6-703-692-01	s	IC GS1561S-CFE3
IC205	8-759-592-44	s	IC TC7SZ04FU(TE85R)
IC207	8-759-472-43	s	IC 74VHC245MTCX
IC209	8-759-592-42	s	IC TC7SZ00FU(TE85R)
IC210	6-700-804-01	s	IC SN74LVC574APWR
IC211	6-700-804-01	s	IC SN74LVC574APWR
IC212	6-700-804-01	s	IC SN74LVC574APWR
IC213	8-759-592-42	s	IC TC7SZ00FU(TE85R)
IC401	6-700-804-01	s	IC SN74LVC574APWR
IC402	6-700-804-01	s	IC SN74LVC574APWR
IC403	6-700-804-01	s	IC SN74LVC574APWR
IC404	8-759-592-44	s	IC TC7SZ04FU(TE85R)
IC405	8-759-472-43	s	IC 74VHC245MTCX
IC407	8-759-363-26	s	IC RN5VD28AA-TL
IC408	8-759-471-96	s	IC 74VHC08MTCX
IC410	6-703-693-01	s	IC GS1532-CFE3
IC413	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC414	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC415	8-759-540-36	s	IC SN74LVC157APWR
IC416	9-910-999-34	s	DELETED FROM RP MASTER
IC421	8-759-592-44	s	IC TC7SZ04FU(TE85R)
IC422	8-759-592-44	s	IC TC7SZ04FU(TE85R)
IC423	8-759-592-44	s	IC TC7SZ04FU(TE85R)
JC1	1-216-864-11	s	CONDUCTOR, CHIP (1608)
JC2	1-216-864-11	s	CONDUCTOR, CHIP (1608)
JC101	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
JC102	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
L1	1-416-948-21	s	COIL, CHOKE (SMD)
L2	1-414-398-11	s	INDUCTOR (SMD) 10UH
L3	1-414-398-11	s	INDUCTOR (SMD) 10UH
L4	1-414-398-11	s	INDUCTOR (SMD) 10UH
L5	1-416-344-11	s	COIL, CHOKE 10UH
L6	1-416-344-11	s	COIL, CHOKE 10UH
L7	1-416-344-11	s	COIL, CHOKE 10UH
L202	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L203	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L204	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L205	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L401	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L402	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L403	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
Q1	8-729-032-74	s	TRANSISTOR 2SA1615-Z-K
Q2	8-729-927-99	s	TRANSISTOR 2SC4617R
Q3	8-729-032-74	s	TRANSISTOR 2SA1615-Z-K
Q4	8-729-927-99	s	TRANSISTOR 2SC4617R
Q5	8-729-928-19	s	TRANSISTOR 2SA1774R
Q6	8-729-927-99	s	TRANSISTOR 2SC4617R
Q7	8-729-928-19	s	TRANSISTOR 2SA1774R
Q8	8-729-927-99	s	TRANSISTOR 2SC4617R
Q9	8-729-927-99	s	TRANSISTOR 2SC4617R
Q101	8-729-928-19	s	TRANSISTOR 2SA1774R
Q102	8-729-928-19	s	TRANSISTOR 2SA1774R
Q103	8-729-927-99	s	TRANSISTOR 2SC4617R
Q104	8-729-927-99	s	TRANSISTOR 2SC4617R
Q105	8-729-928-19	s	TRANSISTOR 2SA1774R
Q106	8-729-928-19	s	TRANSISTOR 2SA1774R
Q205	8-729-928-27	s	TRANSISTOR DTA144EE

(SDP-12 BOARD suffix 11)

Ref. No. or Q'ty	Part No.	SP	Description
Q206	8-729-928-81	s	TRANSISTOR DTC144EE
Q207	8-729-041-23	s	TRANSISTOR NDS356AP
Q407	8-729-928-27	s	TRANSISTOR DTA144EE
Q408	8-729-928-81	s	TRANSISTOR DTC144EE
Q409	8-729-041-23	s	TRANSISTOR NDS356AP
R1	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R2	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R3	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R4	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R5	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R6	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R7	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R8	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R9	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R10	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R11	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R12	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R13	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R14	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R15	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R16	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R17	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R18	1-208-931-11	s	RESISTOR, CHIP 68K (1005)
R19	1-208-931-11	s	RESISTOR, CHIP 68K (1005)
R20	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R21	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R22	1-208-939-11	s	RESISTOR, CHIP 150K (1005)
R23	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R24	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R25	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R26	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R27	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R28	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R29	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R30	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R31	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R32	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005
R33	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R34	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R35	1-208-703-11	s	RESISTOR,CHIP 6.8K 1/16W(1005)
R36	1-208-703-11	s	RESISTOR,CHIP 6.8K 1/16W(1005)
R37	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R38	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R39	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R40	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R41	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R42	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005
R43	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R44	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R45	1-208-703-11	s	RESISTOR,CHIP 6.8K 1/16W(1005)
R46	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005
R47	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005
R48	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R49	1-208-703-11	s	RESISTOR,CHIP 6.8K 1/16W(1005)
R51	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R52	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R53	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R54	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R55	1-208-911-11	s	RESISTOR, CHIP 10K (1005)

(SDP-12 BOARD suffix 11)

Ref. No. or Q'ty	Part No.	SP	Description
R56	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R57	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R58	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R59	1-208-703-11	s	RESISTOR,CHIP 6.8K 1/16W(1005)
R60	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R61	1-208-931-11	s	RESISTOR, CHIP 68K (1005)
R62	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R63	1-208-703-11	s	RESISTOR,CHIP 6.8K 1/16W(1005)
R64	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R65	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R66	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R67	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R68	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R69	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R70	1-208-663-11	s	RESISTOR CHIP 150 1/16W (1005)
R71	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R72	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R73	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R74	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R101	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R102	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R103	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R104	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R105	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R106	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R107	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R108	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R109	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R110	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R111	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R112	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R113	1-208-703-11	s	RESISTOR,CHIP 6.8K 1/16W(1005)
R114	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005
R115	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R116	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R117	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R118	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R119	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R120	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R121	1-208-703-11	s	RESISTOR,CHIP 6.8K 1/16W(1005)
R122	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R123	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R124	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R125	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R126	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R127	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R128	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R129	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R130	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R131	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R132	1-208-703-11	s	RESISTOR,CHIP 6.8K 1/16W(1005)
R133	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R134	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R135	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R136	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R139	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R140	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R141	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R142	1-208-703-11	s	RESISTOR,CHIP 6.8K 1/16W(1005)

(SDP-12 BOARD suffix 11)

Ref. No. or Q'ty	Part No.	SP	Description
R143	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R144	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R145	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R146	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R147	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R148	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R149	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R150	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R151	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R152	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R153	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R154	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R155	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R156	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R157	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R158	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R159	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R161	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R212	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R213	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R217	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R238	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R241	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R242	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R243	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R244	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R245	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R246	1-208-703-11	s	RESISTOR,CHIP 6.8K 1/16W(1005)
R248	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R249	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R251	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R252	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R253	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R254	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R255	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R256	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R257	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R259	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R262	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R264	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R265	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R268	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R269	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R271	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R272	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R277	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R278	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R280	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R281	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R282	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R283	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R284	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R285	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R286	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R287	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R289	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R290	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R291	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R292	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)

(SDP-12 BOARD suffix 11)

Ref. No. or Q'ty	Part No.	SP	Description
R293	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R297	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R298	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R300	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R301	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R302	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R303	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R304	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R305	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R306	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R401	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R403	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R404	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R405	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R406	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R407	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R408	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R409	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R410	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R412	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R413	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R414	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R416	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R417	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R418	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R421	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R422	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R423	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R424	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R425	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R426	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R427	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R428	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R429	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R433	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R435	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R436	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R437	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R438	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R439	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R440	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R441	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R442	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R444	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R445	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R446	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R447	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R448	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R449	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R450	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R451	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R452	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R453	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R454	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R455	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R456	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R457	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R458	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R459	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)

(SDP-12 BOARD suffix 11)

Ref. No. or Q'ty	Part No.	SP	Description
R460	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R461	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R462	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R463	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R464	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R465	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R466	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R467	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R468	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R469	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R470	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R471	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R472	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R474	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R478	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R480	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R482	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R483	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R485	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R486	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R487	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R488	1-218-939-11	s	RESISTOR, CHIP 68 1/16W (1005)
R489	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R490	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R491	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R492	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R493	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R495	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R496	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R497	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R498	1-208-652-11	s	RESISTOR CHIP 51 1/16W (1005)
R499	1-208-652-11	s	RESISTOR CHIP 51 1/16W (1005)
R505	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R508	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R521	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R522	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R523	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R532	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R533	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R534	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R535	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R536	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R537	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R538	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R539	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R540	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R565	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R566	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
RB201	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB202	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB203	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB204	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB205	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB206	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB207	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB213	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB214	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB215	1-234-371-11	s	RES, NETWORK 47X4 (1005)

(SDP-12 BOARD suffix 11)

Ref. No. or Q'ty	Part No.	SP	Description
RB216	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB217	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB224	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB225	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB401	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB402	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB403	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB404	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB405	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB406	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB407	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB408	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB409	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB410	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB411	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB412	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB413	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB414	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB415	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB416	1-234-381-21	s	RES, NETWORK 100KX4 (1005)
RB417	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB418	1-234-381-21	s	RES, NETWORK 100KX4 (1005)
RB424	1-234-381-21	s	RES, NETWORK 100KX4 (1005)
RB425	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB426	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB427	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB428	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB429	1-234-372-11	s	RES, NETWORK 100X4 (1005)
S401	1-692-271-31	s	SWITCH, SLIDE
S402	1-771-721-11	s	SWITCH, TACTILE
TP201	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
TP401	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
X201	1-795-872-11	s	OSCILLATOR
X401	1-795-872-11	s	OSCILLATOR

VDA-64A BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1132-791-A	s	MOUNTED CIRCUIT BOARD, VDA-64A
8pcs	3-364-941-01	s	SCREW (+B) (2.6X5),NYLOK
C1	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C2	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C3	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C4	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C7	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C9	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C10	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C11	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C12	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C13	1-128-589-11	s	CAPACITOR ELECT 47MF/6.3V(105C
C14	1-128-589-11	s	CAPACITOR ELECT 47MF/6.3V(105C
C101	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C102	1-128-589-11	s	CAPACITOR ELECT 47MF/6.3V(105C
C103	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C104	1-128-589-11	s	CAPACITOR ELECT 47MF/6.3V(105C
C105	1-128-589-11	s	CAPACITOR ELECT 47MF/6.3V(105C
C106	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C107	1-128-589-11	s	CAPACITOR ELECT 47MF/6.3V(105C
C108	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C201	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C202	1-128-589-11	s	CAPACITOR ELECT 47MF/6.3V(105C
C203	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C204	1-128-589-11	s	CAPACITOR ELECT 47MF/6.3V(105C
C205	1-128-589-11	s	CAPACITOR ELECT 47MF/6.3V(105C
C206	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C207	1-128-589-11	s	CAPACITOR ELECT 47MF/6.3V(105C
C208	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C211	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
CN1	1-793-324-11	o	CONNECTOR, COAXIAL (BNC TYPE)
CN2	1-793-324-11	o	CONNECTOR, COAXIAL (BNC TYPE)
CN3	1-793-324-11	o	CONNECTOR, COAXIAL (BNC TYPE)
CN4	1-793-324-11	o	CONNECTOR, COAXIAL (BNC TYPE)
D1	8-719-017-03	s	DIODE 02DZ4.7-TPH3
D2	8-719-017-03	s	DIODE 02DZ4.7-TPH3
D201	8-719-801-78	s	DIODE 1SS184
E101	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
E102	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
FL101	1-813-437-11	s	FILTER, LOW PASS (10MHZ)
FL201	1-813-437-11	s	FILTER, LOW PASS (10MHZ)
FL202	1-813-437-11	s	FILTER, LOW PASS (10MHZ)
IC1	6-704-976-01	s	IC ADR381ART-REEL7
IC2	8-759-327-01	s	IC NJM062V-TE2
IC3	8-759-338-95	s	IC NJM2903V (TE2)
IC101	8-759-561-46	s	IC AD8014ART-REEL7
IC102	8-759-561-46	s	IC AD8014ART-REEL7
IC201	8-759-561-46	s	IC AD8014ART-REEL7
IC202	8-759-561-46	s	IC AD8014ART-REEL7
L1	1-414-398-11	s	INDUCTOR (SMD) 10UH
L2	1-414-398-11	s	INDUCTOR (SMD) 10UH
L101	1-414-398-11	s	INDUCTOR (SMD) 10UH
L102	1-414-398-11	s	INDUCTOR (SMD) 10UH
L103	1-414-398-11	s	INDUCTOR (SMD) 10UH
L104	1-414-398-11	s	INDUCTOR (SMD) 10UH
L201	1-414-398-11	s	INDUCTOR (SMD) 10UH

(VDA-64A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
L202	1-414-398-11	s	INDUCTOR (SMD) 10UH
L203	1-414-398-11	s	INDUCTOR (SMD) 10UH
L204	1-414-398-11	s	INDUCTOR (SMD) 10UH
L205	1-414-398-11	s	INDUCTOR (SMD) 10UH
Q1	8-729-230-27	s	TRANSISTOR 2SA1213Y-TE12L
Q2	8-729-807-51	s	TRANSISTOR 2SD1623-S
Q3	8-729-927-99	s	TRANSISTOR 2SC4617R
Q201	8-729-927-99	s	TRANSISTOR 2SC4617R
Q202	8-729-928-19	s	TRANSISTOR 2SA1774R
Q203	8-729-927-99	s	TRANSISTOR 2SC4617R
R2	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R3	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R12	1-218-831-11	s	RESISTOR, CHIP 220 1/10W(1608)
R13	1-218-831-11	s	RESISTOR, CHIP 220 1/10W(1608)
R14	1-218-883-11	s	RESISTOR,CHIP 33K 1/10W (1608)
R15	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/10W(1608)
R16	1-218-875-11	s	RESISTOR,CHIP 15K 1/10W (1608)
R17	1-218-875-11	s	RESISTOR,CHIP 15K 1/10W (1608)
R18	1-218-879-11	s	RESISTOR,CHIP 22K 1/10W (1608)
R19	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/10W(1608)
R20	1-218-883-11	s	RESISTOR,CHIP 33K 1/10W (1608)
R21	1-218-887-11	s	RESISTOR,CHIP 47K 1/10W (1608)
R22	1-218-883-11	s	RESISTOR,CHIP 33K 1/10W (1608)
R23	1-218-891-11	s	RESISTOR,CHIP 68K 1/10W (1608)
R24	1-218-891-11	s	RESISTOR,CHIP 68K 1/10W (1608)
R25	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/10W(1608)
R26	1-218-879-11	s	RESISTOR,CHIP 22K 1/10W (1608)
R27	1-218-879-11	s	RESISTOR,CHIP 22K 1/10W (1608)
R28	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R102	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R107	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)
R109	1-218-831-11	s	RESISTOR, CHIP 220 1/10W(1608)
R111	1-218-839-11	s	RESISTOR,CHIP 470 1/10W (1608)
R114	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R117	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R118	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R119	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)
R120	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)
R121	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R122	1-218-843-11	s	RESISTOR,CHIP 680 1/10W (1608)
R123	1-218-843-11	s	RESISTOR,CHIP 680 1/10W (1608)
R126	1-218-843-11	s	RESISTOR,CHIP 680 1/10W (1608)
R127	1-218-843-11	s	RESISTOR,CHIP 680 1/10W (1608)
R134	1-211-990-11	s	RESISTOR,CHIP 75 1/10W (1608)
R135	1-211-990-11	s	RESISTOR,CHIP 75 1/10W (1608)
R142	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R143	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R202	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R204	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R205	1-218-887-11	s	RESISTOR,CHIP 47K 1/10W (1608)
R207	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)
R208	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)
R209	1-218-831-11	s	RESISTOR, CHIP 220 1/10W(1608)
R210	1-218-831-11	s	RESISTOR, CHIP 220 1/10W(1608)
R212	1-218-839-11	s	RESISTOR,CHIP 470 1/10W (1608)
R214	1-218-839-11	s	RESISTOR,CHIP 470 1/10W (1608)
R215	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R216	1-216-864-11	s	CONDUCTOR, CHIP (1608)

(VDA-64A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R217	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)
R218	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)
R219	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R220	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R221	1-218-843-11	s	RESISTOR,CHIP 680 1/10W (1608)
R222	1-218-843-11	s	RESISTOR,CHIP 680 1/10W (1608)
R225	1-218-843-11	s	RESISTOR,CHIP 680 1/10W (1608)
R226	1-218-843-11	s	RESISTOR,CHIP 680 1/10W (1608)
R227	1-211-990-11	s	RESISTOR,CHIP 75 1/10W (1608)
R228	1-211-990-11	s	RESISTOR,CHIP 75 1/10W (1608)
R229	1-218-887-11	s	RESISTOR,CHIP 47K 1/10W (1608)
R230	1-218-887-11	s	RESISTOR,CHIP 47K 1/10W (1608)
R231	1-218-887-11	s	RESISTOR,CHIP 47K 1/10W (1608)
R232	1-211-977-11	s	RESISTOR,CHIP 22 1/10W (1608)
R235	1-218-859-11	s	RESISTOR,CHIP 3.3K 1/10W(1608)
R236	1-218-887-11	s	RESISTOR,CHIP 47K 1/10W (1608)
R237	1-211-977-11	s	RESISTOR,CHIP 22 1/10W (1608)
RY201	1-755-380-21	s	RELAY

VDA-64B BOARD
---

*1: Board No. suffix 11
*2: Board No. suffix 12

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1132-792-A	s	MOUNTED CIRCUIT BOARD, VDA-64B
8pcs	3-364-941-01	s	SCREW (+B) (2.6X5),NYLOK
C1	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C2	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C3	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C4	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C7	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C9	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C10	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C11	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C12	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C13	1-128-589-11	s	CAPACITOR ELECT 47MF/6.3V(105C
C14	1-128-589-11	s	CAPACITOR ELECT 47MF/6.3V(105C
C103	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C104	1-128-589-11	s	CAPACITOR ELECT 47MF/6.3V(105C
C107	1-128-589-11	s	CAPACITOR ELECT 47MF/6.3V(105C
C108	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C111	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C112	1-128-589-11	s	CAPACITOR ELECT 47MF/6.3V(105C
C116	1-128-589-11	s	CAPACITOR ELECT 47MF/6.3V(105C
C117	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C118	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C201	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C202	1-128-589-11	s	CAPACITOR ELECT 47MF/6.3V(105C
C203	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C204	1-128-589-11	s	CAPACITOR ELECT 47MF/6.3V(105C
C205	1-128-589-11	s	CAPACITOR ELECT 47MF/6.3V(105C
C206	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C207	1-128-589-11	s	CAPACITOR ELECT 47MF/6.3V(105C
C208	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C211	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
CN1	1-793-324-11	o	CONNECTOR, COAXIAL (BNC TYPE)
CN2	1-793-324-11	o	CONNECTOR, COAXIAL (BNC TYPE)
CN3	1-793-324-11	o	CONNECTOR, COAXIAL (BNC TYPE)
CN4	1-793-324-11	o	CONNECTOR, COAXIAL (BNC TYPE)
D1	8-719-017-03	s	DIODE 02DZ4.7-TPH3
D2	8-719-017-03	s	DIODE 02DZ4.7-TPH3
D101	8-719-801-78	s	DIODE 1SS184
D201	8-719-801-78	s	DIODE 1SS184
E101	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
E102	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
FL102	1-813-437-11	s	FILTER, LOW PASS (10MHZ)
FL201	1-813-437-11	s	FILTER, LOW PASS (10MHZ)
FL202	1-813-437-11	s	FILTER, LOW PASS (10MHZ)
IC1	6-704-976-01	s	IC ADR381ART-REEL7
IC2	8-759-327-01	s	IC NJM062V-TE2
IC3	8-759-338-95	s	IC NJM2903V (TE2)
IC102	8-759-561-46	s	IC AD8014ART-REEL7
IC103	8-759-561-46	s	IC AD8014ART-REEL7
IC201	8-759-561-46	s	IC AD8014ART-REEL7
IC202	8-759-561-46	s	IC AD8014ART-REEL7
L1	1-414-398-11	s	INDUCTOR (SMD) 10UH
L2	1-414-398-11	s	INDUCTOR (SMD) 10UH
L102	1-414-398-11	s	INDUCTOR (SMD) 10UH

(VDA-64B BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
L104	1-414-398-11	s	INDUCTOR (SMD) 10UH
L105	1-414-398-11	s	INDUCTOR (SMD) 10UH
L106	1-414-398-11	s	INDUCTOR (SMD) 10UH
L107	1-414-398-11	s	INDUCTOR (SMD) 10UH
L201	1-414-398-11	s	INDUCTOR (SMD) 10UH
L202	1-414-398-11	s	INDUCTOR (SMD) 10UH
L203	1-414-398-11	s	INDUCTOR (SMD) 10UH
L204	1-414-398-11	s	INDUCTOR (SMD) 10UH
L205	1-414-398-11	s	INDUCTOR (SMD) 10UH
Q1	8-729-230-27	s	TRANSISTOR 2SA1213Y-TE12L
Q2	8-729-807-51	s	TRANSISTOR 2SD1623-S
Q3	8-729-927-99	s	TRANSISTOR 2SC4617R
Q101	8-729-927-99	s	TRANSISTOR 2SC4617R
Q102	8-729-928-19	s	TRANSISTOR 2SA1774R
Q103	8-729-927-99	s	TRANSISTOR 2SC4617R
Q201	8-729-927-99	s	TRANSISTOR 2SC4617R
Q202	8-729-928-19	s	TRANSISTOR 2SA1774R
Q203	8-729-927-99	s	TRANSISTOR 2SC4617R
R2	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R12	1-218-831-11	s	RESISTOR, CHIP 220 1/10W(1608)
R13	1-218-831-11	s	RESISTOR, CHIP 220 1/10W(1608)
R14	1-218-883-11	s	RESISTOR,CHIP 33K 1/10W (1608)
R15	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/10W(1608)
R16	1-218-875-11	s	RESISTOR,CHIP 15K 1/10W (1608)
R17	1-218-875-11	s	RESISTOR,CHIP 15K 1/10W (1608)
R18	1-218-879-11	s	RESISTOR,CHIP 22K 1/10W (1608)
R19	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/10W(1608)
R20	1-218-883-11	s	RESISTOR,CHIP 33K 1/10W (1608)
R21	1-218-887-11	s	RESISTOR,CHIP 47K 1/10W (1608)
R22	1-218-883-11	s	RESISTOR,CHIP 33K 1/10W (1608)
R23	1-218-891-11	s	RESISTOR,CHIP 68K 1/10W (1608)
R24	1-218-891-11	s	RESISTOR,CHIP 68K 1/10W (1608)
R25	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/10W(1608)
R26	1-218-879-11	s	RESISTOR,CHIP 22K 1/10W (1608)
R27	1-218-879-11	s	RESISTOR,CHIP 22K 1/10W (1608)
R28	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R104	1-218-859-11	s	RESISTOR,CHIP 3.3K 1/10W(1608)
R105	1-218-887-11	s	RESISTOR,CHIP 47K 1/10W (1608)
R108	1-218-839-11	s	RESISTOR,CHIP 470 1/10W (1608)
R110	1-211-985-11	s	RESISTOR,CHIP 47 1/10W (1608)
R113	1-218-839-11	s	RESISTOR,CHIP 470 1/10W (1608)
R116	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R118	1-211-985-11	s	RESISTOR,CHIP 47 1/10W (1608)
R120	1-218-839-11	s	RESISTOR,CHIP 470 1/10W (1608)
R123	1-218-839-11	s	RESISTOR,CHIP 470 1/10W (1608)
R127	1-218-843-11	s	RESISTOR,CHIP 680 1/10W (1608)
R129	1-218-835-11	s	RESISTOR,CHIP 330 1/10W (1608)
R130	1-218-859-11	s	RESISTOR,CHIP 3.3K 1/10W(1608)
R133	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)
R135	1-211-990-11	s	RESISTOR,CHIP 75 1/10W (1608)
R136 *1	1-218-883-11	s	RESISTOR,CHIP 33K 1/10W (1608)
*2	1-218-871-91	s	RES,CHIP 10K (1608)
R137	1-218-831-11	s	RESISTOR, CHIP 220 1/10W(1608)
R138	1-218-887-11	s	RESISTOR,CHIP 47K 1/10W (1608)
R139	1-218-887-11	s	RESISTOR,CHIP 47K 1/10W (1608)
R140	1-218-887-11	s	RESISTOR,CHIP 47K 1/10W (1608)
R141	1-211-977-11	s	RESISTOR,CHIP 22 1/10W (1608)
R144	1-218-859-11	s	RESISTOR,CHIP 3.3K 1/10W(1608)
R145	1-218-887-11	s	RESISTOR,CHIP 47K 1/10W (1608)

(VDA-64B BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R146	1-211-977-11	s	RESISTOR,CHIP 22 1/10W (1608)
R202	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R204	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R205	1-218-887-11	s	RESISTOR,CHIP 47K 1/10W (1608)
R207	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)
R208	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)
R209	1-218-831-11	s	RESISTOR, CHIP 220 1/10W(1608)
R210	1-218-831-11	s	RESISTOR, CHIP 220 1/10W(1608)
R212	1-218-839-11	s	RESISTOR,CHIP 470 1/10W (1608)
R214	1-218-839-11	s	RESISTOR,CHIP 470 1/10W (1608)
R215	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R216	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R217	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)
R218	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)
R219	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R220	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R221	1-218-843-11	s	RESISTOR,CHIP 680 1/10W (1608)
R222	1-218-843-11	s	RESISTOR,CHIP 680 1/10W (1608)
R225	1-218-843-11	s	RESISTOR,CHIP 680 1/10W (1608)
R226	1-218-843-11	s	RESISTOR,CHIP 680 1/10W (1608)
R227	1-211-990-11	s	RESISTOR,CHIP 75 1/10W (1608)
R228	1-211-990-11	s	RESISTOR,CHIP 75 1/10W (1608)
R229	1-218-887-11	s	RESISTOR,CHIP 47K 1/10W (1608)
R230	1-218-887-11	s	RESISTOR,CHIP 47K 1/10W (1608)
R231	1-218-887-11	s	RESISTOR,CHIP 47K 1/10W (1608)
R232	1-211-977-11	s	RESISTOR,CHIP 22 1/10W (1608)
R235	1-218-859-11	s	RESISTOR,CHIP 3.3K 1/10W(1608)
R236	1-218-887-11	s	RESISTOR,CHIP 47K 1/10W (1608)
R237	1-211-977-11	s	RESISTOR,CHIP 22 1/10W (1608)
R238	1-211-990-11	s	RESISTOR,CHIP 75 1/10W (1608)
RY101	1-755-380-21	s	RELAY
RY201	1-755-380-21	s	RELAY

VDA-64C BOARD
---

*1: Board No. suffix 12

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1132-793-A	s	MOUNTED CIRCUIT BOARD, VDA-64C
8pcs	3-364-941-01	s	SCREW (+B) (2.6X5),NYLOK
C1	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C2	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C3	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C4	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C7	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C9	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C10	1-100-352-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C11	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C12	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C13	1-128-589-11	s	CAPACITOR ELECT 47MF/6.3V(105C
C14	1-128-589-11	s	CAPACITOR ELECT 47MF/6.3V(105C
C101	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C102	1-128-589-11	s	CAPACITOR ELECT 47MF/6.3V(105C
C103	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C104	1-128-589-11	s	CAPACITOR ELECT 47MF/6.3V(105C
C105	1-128-589-11	s	CAPACITOR ELECT 47MF/6.3V(105C
C106	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C107	1-128-589-11	s	CAPACITOR ELECT 47MF/6.3V(105C
C108	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C201	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C202	1-128-589-11	s	CAPACITOR ELECT 47MF/6.3V(105C
C203	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C204	1-128-589-11	s	CAPACITOR ELECT 47MF/6.3V(105C
C205	1-128-589-11	s	CAPACITOR ELECT 47MF/6.3V(105C
C206	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C207	1-128-589-11	s	CAPACITOR ELECT 47MF/6.3V(105C
C208	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
CN1	1-793-324-11	o	CONNECTOR, COAXIAL (BNC TYPE)
CN2	1-793-324-11	o	CONNECTOR, COAXIAL (BNC TYPE)
CN3	1-793-324-11	o	CONNECTOR, COAXIAL (BNC TYPE)
CN4	1-793-324-11	o	CONNECTOR, COAXIAL (BNC TYPE)
D1	8-719-017-03	s	DIODE 02DZ4.7-TPH3
D2	8-719-017-03	s	DIODE 02DZ4.7-TPH3
E101	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
E102	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
FL101	1-813-437-11	s	FILTER, LOW PASS (10MHZ)
IC1	6-704-976-01	s	IC ADR381ART-REEL7
IC2	8-759-327-01	s	IC NJM062V-TE2
IC3	8-759-338-95	s	IC NJM2903V (TE2)
IC101	8-759-561-46	s	IC AD8014ART-REEL7
IC102	8-759-561-46	s	IC AD8014ART-REEL7
IC201	8-759-561-46	s	IC AD8014ART-REEL7
IC202	8-759-561-46	s	IC AD8014ART-REEL7
L1	1-414-398-11	s	INDUCTOR (SMD) 10UH
L2	1-414-398-11	s	INDUCTOR (SMD) 10UH
L101	1-414-398-11	s	INDUCTOR (SMD) 10UH
L102	1-414-398-11	s	INDUCTOR (SMD) 10UH
L103	1-414-398-11	s	INDUCTOR (SMD) 10UH
L104	1-414-398-11	s	INDUCTOR (SMD) 10UH
L201	1-414-398-11	s	INDUCTOR (SMD) 10UH
L202	1-414-398-11	s	INDUCTOR (SMD) 10UH
L203	1-414-398-11	s	INDUCTOR (SMD) 10UH

(VDA-64C BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
L204	1-414-398-11	s	INDUCTOR (SMD) 10UH
Q1	8-729-230-27	s	TRANSISTOR 2SA1213Y-TE12L
Q2	8-729-807-51	s	TRANSISTOR 2SD1623-S
Q3	8-729-927-99	s	TRANSISTOR 2SC4617R
R5	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R6	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R7	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R8	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R9	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R10	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R12	1-218-831-11	s	RESISTOR, CHIP 220 1/10W(1608)
R13	1-218-831-11	s	RESISTOR, CHIP 220 1/10W(1608)
R14	1-218-883-11	s	RESISTOR,CHIP 33K 1/10W (1608)
R15	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/10W(1608)
R16	1-218-875-11	s	RESISTOR,CHIP 15K 1/10W (1608)
R17	1-218-875-11	s	RESISTOR,CHIP 15K 1/10W (1608)
R18	1-218-879-11	s	RESISTOR,CHIP 22K 1/10W (1608)
R19	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/10W(1608)
R20	1-218-883-11	s	RESISTOR,CHIP 33K 1/10W (1608)
R21	1-218-887-11	s	RESISTOR,CHIP 47K 1/10W (1608)
R22	1-218-883-11	s	RESISTOR,CHIP 33K 1/10W (1608)
R23	1-218-891-11	s	RESISTOR,CHIP 68K 1/10W (1608)
R24	1-218-891-11	s	RESISTOR,CHIP 68K 1/10W (1608)
R25	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/10W(1608)
R26	1-218-879-11	s	RESISTOR,CHIP 22K 1/10W (1608)
R27	1-218-879-11	s	RESISTOR,CHIP 22K 1/10W (1608)
R28	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R101	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R103	1-211-973-11	s	RESISTOR,CHIP 15 1/10W (1608)
R107	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)
R109	1-218-831-11	s	RESISTOR, CHIP 220 1/10W(1608)
R111	1-218-839-11	s	RESISTOR,CHIP 470 1/10W (1608)
R112	1-211-989-11	s	RESISTOR,CHIP 68 1/10W (1608)
R115	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R117	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R118	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R119	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)
R120	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)
R121	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R122	1-218-843-11	s	RESISTOR,CHIP 680 1/10W (1608)
R123	1-218-843-11	s	RESISTOR,CHIP 680 1/10W (1608)
R126	1-218-843-11	s	RESISTOR,CHIP 680 1/10W (1608)
R127	1-218-843-11	s	RESISTOR,CHIP 680 1/10W (1608)
R134	1-211-990-11	s	RESISTOR,CHIP 75 1/10W (1608)
R135	1-211-990-11	s	RESISTOR,CHIP 75 1/10W (1608)
R142	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R143	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R201	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R203	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R211	1-211-973-11	s	RESISTOR,CHIP 15 1/10W (1608)
R212	1-211-989-11	s	RESISTOR,CHIP 68 1/10W (1608)
R213	1-211-973-11	s	RESISTOR,CHIP 15 1/10W (1608)
R214	1-211-989-11	s	RESISTOR,CHIP 68 1/10W (1608)
R215	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R216	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R217	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)
R218	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)
R219	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R220	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)

(VDA-64C BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R221	1-218-843-11	s	RESISTOR,CHIP 680 1/10W (1608)
R222	1-218-843-11	s	RESISTOR,CHIP 680 1/10W (1608)
R225	1-218-843-11	s	RESISTOR,CHIP 680 1/10W (1608)
R226	1-218-843-11	s	RESISTOR,CHIP 680 1/10W (1608)
R227	1-211-990-11	s	RESISTOR,CHIP 75 1/10W (1608)
R228	1-211-990-11	s	RESISTOR,CHIP 75 1/10W (1608)
R233	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R234	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R239	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R240	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R241 *1	1-216-864-91	s	CONDUCTOR, CHIP (1608)
RV101	1-225-788-21	s	RES, ADJ, CERMET 1K

VIF-34B/34BG BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1161-077-A	s	MOUNTED CIRCUIT BOARD, VIF-34BG (GOLD)
1pc	A-1151-870-A	s	MOUNTED CIRCUIT BOARD, VIF-34B (SILVER)
C1	1-127-573-11	s	CAPACITOR,CERAMIC 1MFB(2012)
C2	1-127-573-11	s	CAPACITOR,CERAMIC 1MFB(2012)
C3	1-128-589-11	s	CAPACITOR,ELECT 47MF/6.3V(105C)
C4	1-128-589-11	s	CAPACITOR,ELECT 47MF/6.3V(105C)
C5	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C6	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C7	1-100-505-11	s	CAPACITOR,CERAMIC 0.1MF B 1005
C8	1-100-505-11	s	CAPACITOR,CERAMIC 0.1MF B 1005
C9	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C10	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C11	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C12	1-127-573-11	s	CAPACITOR,CERAMIC 1MFB(2012)
C13	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C14	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C15	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C16	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C17	1-127-573-11	s	CAPACITOR,CERAMIC 1MFB(2012)
C18	1-115-340-11	s	CAPACITOR CERAMIC 0.22MF/25V B
C19	1-115-340-11	s	CAPACITOR CERAMIC 0.22MF/25V B
C20	1-128-589-11	s	CAPACITOR ELECT 47MF/6.3V(105C
C21	1-126-399-11	s	CAPACITOR ELECT 10MF/35V(CHIP)
C22	1-126-399-11	s	CAPACITOR ELECT 10MF/35V(CHIP)
C23	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C24	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C25	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C26	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C27	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C28	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C29	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C31	1-100-505-11	s	CAPACITOR,CERAMIC 0.1MF B 1005
C32	1-100-505-11	s	CAPACITOR,CERAMIC 0.1MF B 1005
C33	1-100-505-11	s	CAPACITOR,CERAMIC 0.1MF B 1005
C34	1-100-505-11	s	CAPACITOR,CERAMIC 0.1MF B 1005
C35	1-100-505-11	s	CAPACITOR,CERAMIC 0.1MF B 1005
C36	1-100-505-11	s	CAPACITOR,CERAMIC 0.1MF B 1005
C101	1-100-505-11	s	CAPACITOR,CERAMIC 0.1MF B 1005
C102	1-100-505-11	s	CAPACITOR,CERAMIC 0.1MF B 1005
C103	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C104	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C105	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C106	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C107	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C108	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C109	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C110	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C111	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C112	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C113	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C114	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C115	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C116	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C117	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C120	1-127-573-11	s	CAPACITOR,CERAMIC 1MFB(2012)
C121	1-127-573-11	s	CAPACITOR,CERAMIC 1MFB(2012)
C122	1-100-505-11	s	CAPACITOR,CERAMIC 0.1MF B 1005

(VIF-34B/34BG BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
CN3	1-778-451-31	s	CONNECTOR, FFC/FPC(ZIF) AN 50P (GOLD)
	1-778-451-21	o	CONNECTOR, FPC (50P) (SILVER)
CN4	1-770-161-21	s	PIN, CONNECTOR (SMT) 6P
CN5	1-778-451-31	s	CONNECTOR, FFC/FPC(ZIF) AN 50P (GOLD)
	1-778-451-21	o	CONNECTOR, FPC (50P) (SILVER)
CN101	1-695-480-21	o	PIN, CONNECTOR (PC BOARD) 2P
D1	8-719-017-03	s	DIODE 02DZ4.7-TPH3
D2	8-719-017-03	s	DIODE 02DZ4.7-TPH3
D3	8-719-017-03	s	DIODE 02DZ4.7-TPH3
D4	8-719-046-87	s	DIODE F1J6
D31	8-719-421-27	s	DIODE MA728
D32	8-719-421-27	s	DIODE MA728
D33	8-719-024-81	s	DIODE 1SS300-TE85L
D34	8-719-024-81	s	DIODE 1SS300-TE85L
D35	8-719-024-81	s	DIODE 1SS300-TE85L
D36	8-719-024-81	s	DIODE 1SS300-TE85L
D37	8-719-421-27	s	DIODE MA728
D38	8-719-421-27	s	DIODE MA728
D39	8-719-421-27	s	DIODE MA728
D40	8-719-421-27	s	DIODE MA728
D41	8-719-421-27	s	DIODE MA728
D42	8-719-421-27	s	DIODE MA728
D43	8-719-024-81	s	DIODE 1SS300-TE85L
D44	8-719-024-81	s	DIODE 1SS300-TE85L
D45	8-719-024-81	s	DIODE 1SS300-TE85L
D46	8-719-024-81	s	DIODE 1SS300-TE85L
D47	8-719-024-81	s	DIODE 1SS300-TE85L
D48	8-719-024-81	s	DIODE 1SS300-TE85L
D49	8-719-024-81	s	DIODE 1SS300-TE85L
D50	8-719-024-81	s	DIODE 1SS300-TE85L
D51	8-719-024-81	s	DIODE 1SS300-TE85L
D52	8-719-024-81	s	DIODE 1SS300-TE85L
D53	8-719-024-81	s	DIODE 1SS300-TE85L
D54	8-719-024-81	s	DIODE 1SS300-TE85L
D55	8-719-421-27	s	DIODE MA728
D56	8-719-421-27	s	DIODE MA728
D57	8-719-421-27	s	DIODE MA728
D58	8-719-421-27	s	DIODE MA728
D59	8-719-421-27	s	DIODE MA728
D60	8-719-421-27	s	DIODE MA728
D61	8-719-421-27	s	DIODE MA728
D62	8-719-421-27	s	DIODE MA728
D63	8-719-421-27	s	DIODE MA728
D64	8-719-421-27	s	DIODE MA728
D65	8-719-421-27	s	DIODE MA728
D66	8-719-421-27	s	DIODE MA728
D67	8-719-421-27	s	DIODE MA728
D68	8-719-421-27	s	DIODE MA728
D69	8-719-421-27	s	DIODE MA728
D70	8-719-421-27	s	DIODE MA728
D71	8-719-421-27	s	DIODE MA728
D72	8-719-421-27	s	DIODE MA728
D73	8-719-421-27	s	DIODE MA728
D74	8-719-421-27	s	DIODE MA728
D75	8-719-024-81	s	DIODE 1SS300-TE85L
D76	8-719-024-81	s	DIODE 1SS300-TE85L
D77	8-719-024-81	s	DIODE 1SS300-TE85L

(VIF-34B/34BG BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
D78	8-719-024-81	s	DIODE 1SS300-TE85L
D79	8-719-421-27	s	DIODE MA728
D80	8-719-421-27	s	DIODE MA728
D81	8-719-421-27	s	DIODE MA728
D82	8-719-421-27	s	DIODE MA728
D83	8-719-421-27	s	DIODE MA728
D84	8-719-421-27	s	DIODE MA728
D85	8-719-421-27	s	DIODE MA728
D86	8-719-421-27	s	DIODE MA728
D101	8-719-024-81	s	DIODE 1SS300-TE85L
D102	8-719-421-27	s	DIODE MA728
D103	8-719-421-27	s	DIODE MA728
D104	8-719-421-27	s	DIODE MA728
D105	8-719-421-27	s	DIODE MA728
D106	8-719-024-81	s	DIODE 1SS300-TE85L
D107	8-719-024-81	s	DIODE 1SS300-TE85L
D108	8-719-421-27	s	DIODE MA728
D109	8-719-421-27	s	DIODE MA728
D110	8-719-421-27	s	DIODE MA728
D111	8-719-421-27	s	DIODE MA728
D112	8-719-024-81	s	DIODE 1SS300-TE85L
D113	8-719-024-81	s	DIODE 1SS300-TE85L
D114	8-719-421-27	s	DIODE MA728
D115	8-719-421-27	s	DIODE MA728
D116	8-719-421-27	s	DIODE MA728
D117	8-719-421-27	s	DIODE MA728
D118	8-719-024-81	s	DIODE 1SS300-TE85L
D119	8-719-024-81	s	DIODE 1SS300-TE85L
D120	8-719-421-27	s	DIODE MA728
D121	8-719-421-27	s	DIODE MA728
D122	8-719-421-27	s	DIODE MA728
D123	8-719-421-27	s	DIODE MA728
D124	8-719-421-27	s	DIODE MA728
D125	8-719-421-27	s	DIODE MA728
D126	8-719-421-27	s	DIODE MA728
D127	8-719-421-27	s	DIODE MA728
D128	8-719-024-81	s	DIODE 1SS300-TE85L
D129	8-719-024-81	s	DIODE 1SS300-TE85L
E1	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
IC1	8-759-327-01	s	IC NJM062V-TE2
IC2	6-704-976-01	s	IC ADR381ART-REEL7
IC3	8-759-561-46	s	IC AD8014ART-REEL7
IC4	8-759-327-01	s	IC NJM062V-TE2
IC31	8-759-472-18	s	IC 74VHC138MTCX
IC32	8-752-392-03	s	IC CXD1095BR
IC33	8-759-472-43	s	IC 74VHC245MTCX
IC34	8-759-662-39	s	IC 74VHCT245AMTCX
IC35	8-759-524-04	s	IC TC74VHC125FT (EL)
IC36	8-759-524-04	s	IC TC74VHC125FT (EL)
IC101	8-752-392-03	s	IC CXD1095BR
IC102	8-759-662-39	s	IC 74VHCT245AMTCX
IC103	8-759-564-49	s	IC TC7W53FU-TE12R
IC104	8-759-561-46	s	IC AD8014ART-REEL7
IC105	8-759-561-46	s	IC AD8014ART-REEL7
IC106	8-759-561-46	s	IC AD8014ART-REEL7
IC107	8-759-745-64	s	IC NJM4560M
IC108	8-759-678-06	s	IC CAT24WC02WI-TE13

(VIF-34B/34BG BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
L1	1-414-398-11	s	INDUCTOR (SMD) 10UH
L2	1-414-398-11	s	INDUCTOR (SMD) 10UH
L3	1-414-398-11	s	INDUCTOR (SMD) 10UH
L4	1-414-398-11	s	INDUCTOR (SMD) 10UH
L101	1-414-398-11	s	INDUCTOR (SMD) 10UH
L102	1-414-398-11	s	INDUCTOR (SMD) 10UH
L103	1-414-398-11	s	INDUCTOR (SMD) 10UH
L104	1-414-398-11	s	INDUCTOR (SMD) 10UH
L105	1-414-398-11	s	INDUCTOR (SMD) 10UH
L106	1-414-398-11	s	INDUCTOR (SMD) 10UH
Q1	8-729-230-27	s	TRANSISTOR 2SA1213Y-TE12L
Q2	8-729-807-51	s	TRANSISTOR 2SD1623-S
Q3	8-729-927-99	s	TRANSISTOR 2SC4617R
Q5	8-729-047-32	s	TRANSISTOR SI4425DY-T1
Q6	8-729-230-27	s	TRANSISTOR 2SA1213Y-TE12L
Q31	8-729-927-99	s	TRANSISTOR 2SC4617R
Q33	8-729-927-99	s	TRANSISTOR 2SC4617R
Q35	8-729-927-99	s	TRANSISTOR 2SC4617R
Q37	8-729-927-99	s	TRANSISTOR 2SC4617R
Q39	8-729-927-99	s	TRANSISTOR 2SC4617R
Q41	8-729-927-99	s	TRANSISTOR 2SC4617R
Q43	8-729-927-99	s	TRANSISTOR 2SC4617R
Q45	8-729-927-99	s	TRANSISTOR 2SC4617R
Q101	8-729-927-99	s	TRANSISTOR 2SC4617R
Q102	8-729-927-99	s	TRANSISTOR 2SC4617R
Q103	8-729-927-99	s	TRANSISTOR 2SC4617R
Q104	8-729-927-99	s	TRANSISTOR 2SC4617R
Q105	8-729-927-99	s	TRANSISTOR 2SC4617R
Q106	8-729-927-99	s	TRANSISTOR 2SC4617R
Q107	8-729-927-99	s	TRANSISTOR 2SC4617R
Q108	8-729-927-99	s	TRANSISTOR 2SC4617R
Q109	8-729-928-19	s	TRANSISTOR 2SA1774R
R1	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R2	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R3	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R4	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R5	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R6	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R7	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R8	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R9	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R10	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R11	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R12	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R14	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R15	1-208-931-11	s	RESISTOR, CHIP 68K (1005)
R16	1-208-931-11	s	RESISTOR, CHIP 68K (1005)
R19	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R22	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R23	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R24	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R25	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R26	1-208-703-11	s	RESISTOR,CHIP 6.8K 1/16W(1005)
R27	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R31	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R32	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R33	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R34	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)

(VIF-34B/34BG BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R35	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R36	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R37	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R39	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R41	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R43	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R45	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R47	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R49	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R51	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R53	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R54	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R55	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R56	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R57	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R58	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R59	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R60	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R61	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R62	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R63	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R64	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R65	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R66	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R67	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R101	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R102	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R103	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R104	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R105	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R106	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R107	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R108	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R109	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R110	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R111	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R112	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R113	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R114	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R115	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R116	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R119	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R121	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R122	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R123	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R124	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R126	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R128	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R129	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R130	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R132	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R133	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R134	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R136	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R137	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R138	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R139	1-208-663-11	s	RESISTOR CHIP 150 1/16W (1005)
R140	1-208-663-11	s	RESISTOR CHIP 150 1/16W (1005)
R141	1-208-663-11	s	RESISTOR CHIP 150 1/16W (1005)

(VIF-34B/34BG BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R142	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R143	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R144	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R145	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R146	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R147	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R148	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R149	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R150	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R151	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R152	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R153	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R154	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R155	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R156	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R157	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R158	1-208-663-11	s	RESISTOR CHIP 150 1/16W (1005)
R159	1-208-663-11	s	RESISTOR CHIP 150 1/16W (1005)
R160	1-208-663-11	s	RESISTOR CHIP 150 1/16W (1005)
R161	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R162	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R163	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R164	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R165	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R166	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
RB31	1-234-381-21	s	RES, NETWORK 100KX4 (1005)
RB32	1-234-381-21	s	RES, NETWORK 100KX4 (1005)
RB33	1-234-381-21	s	RES, NETWORK 100KX4 (1005)
RB34	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB35	1-234-381-21	s	RES, NETWORK 100KX4 (1005)
RB36	1-234-381-21	s	RES, NETWORK 100KX4 (1005)
RB37	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB38	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB39	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB40	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB41	1-233-577-11	s	RESISTOR, CHIP NETWORK 470
RB42	1-233-577-11	s	RESISTOR, CHIP NETWORK 470
RB43	1-233-810-21	s	RES, NETWORK 100K (3216)
RB44	1-234-378-11	s	RES, NETWORK 10KX4 (1005)
RB45	1-234-378-11	s	RES, NETWORK 10KX4 (1005)
RB46	1-233-810-21	s	RES, NETWORK 100K (3216)
RB47	1-233-810-21	s	RES, NETWORK 100K (3216)
RB48	1-233-810-21	s	RES, NETWORK 100K (3216)
RB49	1-233-578-11	s	RESISTOR,CHIP NETWORK 47K
RB50	1-233-578-11	s	RESISTOR,CHIP NETWORK 47K
RB51	1-233-577-11	s	RESISTOR, CHIP NETWORK 470
RB52	1-233-578-11	s	RESISTOR,CHIP NETWORK 47K
RB53	1-233-577-11	s	RESISTOR, CHIP NETWORK 470
RB54	1-233-578-11	s	RESISTOR,CHIP NETWORK 47K
RB55	1-234-380-11	s	RESISTOR,NETWORK 47KX4 (1005)
RB56	1-233-578-11	s	RESISTOR,CHIP NETWORK 47K
RB57	1-233-578-11	s	RESISTOR,CHIP NETWORK 47K
RB58	1-234-380-11	s	RESISTOR,NETWORK 47KX4 (1005)
RB62	1-233-577-11	s	RESISTOR, CHIP NETWORK 470
RB63	1-233-577-11	s	RESISTOR, CHIP NETWORK 470
RB101	1-233-810-21	s	RES, NETWORK 100K (3216)
RB102	1-233-810-21	s	RES, NETWORK 100K (3216)
RB103	1-233-810-21	s	RES, NETWORK 100K (3216)
RB104	1-234-378-11	s	RES, NETWORK 10KX4 (1005)

(VIF-34B/34BG BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB105	1-233-577-11	s	RESISTOR, CHIP NETWORK 470
RB106	1-233-578-11	s	RESISTOR,CHIP NETWORK 47K
RB107	1-233-577-11	s	RESISTOR, CHIP NETWORK 470
RB108	1-233-578-11	s	RESISTOR,CHIP NETWORK 47K
THP1	⚠ 1-804-458-21	s	THERMISTOR, POSITIVE
THP2	⚠ 1-804-458-21	s	THERMISTOR, POSITIVE
THP3	⚠ 1-803-615-11	s	THERMISTOR, POSITIVE
THP4	⚠ 1-803-615-11	s	THERMISTOR, POSITIVE
THP5	⚠ 1-803-615-11	s	THERMISTOR, POSITIVE
THP6	⚠ 1-804-458-21	s	THERMISTOR, POSITIVE

VIF-34/34G BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1161-076-A	s	MOUNTED CIRCUIT BOARD, VIF-34G (GOLD)
1pc	A-1129-229-A	s	MOUNTED CIRCUIT BOARD, VIF-34 (SILVER)
C1	1-127-573-11	s	CAPACITOR,CERAMIC 1MFB(2012)
C2	1-127-573-11	s	CAPACITOR,CERAMIC 1MFB(2012)
C3	1-128-589-11	s	CAPACITOR,ELECT 47MF/6.3V(105C)
C4	1-128-589-11	s	CAPACITOR,ELECT 47MF/6.3V(105C)
C5	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C6	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C7	1-100-505-11	s	CAPACITOR,CERAMIC 0.1MF B 1005
C8	1-100-505-11	s	CAPACITOR,CERAMIC 0.1MF B 1005
C9	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C10	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C11	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C12	1-127-573-11	s	CAPACITOR,CERAMIC 1MFB(2012)
C13	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C14	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C15	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C16	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C17	1-127-573-11	s	CAPACITOR,CERAMIC 1MFB(2012)
C18	1-115-340-11	s	CAPACITOR CERAMIC 0.22MF/25V B
C19	1-115-340-11	s	CAPACITOR CERAMIC 0.22MF/25V B
C20	1-128-589-11	s	CAPACITOR ELECT 47MF/6.3V(105C
C21	1-126-399-11	s	CAPACITOR ELECT 10MF/35V(CHIP)
C22	1-126-399-11	s	CAPACITOR ELECT 10MF/35V(CHIP)
C23	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C24	1-165-989-11	s	CAPACITOR, CERAMIC 10MF (2012)
C25	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C26	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C27	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C28	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C29	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C31	1-100-505-11	s	CAPACITOR,CERAMIC 0.1MF B 1005
C32	1-100-505-11	s	CAPACITOR,CERAMIC 0.1MF B 1005
C33	1-100-505-11	s	CAPACITOR,CERAMIC 0.1MF B 1005
C34	1-100-505-11	s	CAPACITOR,CERAMIC 0.1MF B 1005
C35	1-100-505-11	s	CAPACITOR,CERAMIC 0.1MF B 1005
C36	1-100-505-11	s	CAPACITOR,CERAMIC 0.1MF B 1005
C101	1-100-505-11	s	CAPACITOR,CERAMIC 0.1MF B 1005
C102	1-100-505-11	s	CAPACITOR,CERAMIC 0.1MF B 1005
C103	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C104	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C105	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C106	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C107	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C108	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C109	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C110	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C111	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C112	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C113	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C114	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C115	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C116	1-100-506-91	s	CAPACITOR, CERAMIC 1MF B 1005
C117	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C120	1-127-573-11	s	CAPACITOR,CERAMIC 1MFB(2012)
C121	1-127-573-11	s	CAPACITOR,CERAMIC 1MFB(2012)
C122	1-100-505-11	s	CAPACITOR,CERAMIC 0.1MF B 1005

(VIF-34/34G BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
CN3	1-778-451-31	s	CONNECTOR, FFC/FPC(ZIF) AN 50P (GOLD)
	1-778-451-21	o	CONNECTOR, FPC (50P) (SILVER)
CN4	1-770-161-21	s	PIN, CONNECTOR (SMT) 6P
CN5	1-778-451-31	s	CONNECTOR, FFC/FPC(ZIF) AN 50P (GOLD)
	1-778-451-21	o	CONNECTOR, FPC (50P) (SILVER)
CN101	1-695-480-21	o	PIN, CONNECTOR (PC BOARD) 2P
D1	8-719-017-03	s	DIODE 02DZ4.7-TPH3
D2	8-719-017-03	s	DIODE 02DZ4.7-TPH3
D3	8-719-017-03	s	DIODE 02DZ4.7-TPH3
D4	8-719-046-87	s	DIODE F1J6
D31	8-719-421-27	s	DIODE MA728
D32	8-719-421-27	s	DIODE MA728
D33	8-719-024-81	s	DIODE 1SS300-TE85L
D34	8-719-024-81	s	DIODE 1SS300-TE85L
D35	8-719-024-81	s	DIODE 1SS300-TE85L
D36	8-719-024-81	s	DIODE 1SS300-TE85L
D37	8-719-421-27	s	DIODE MA728
D38	8-719-421-27	s	DIODE MA728
D39	8-719-421-27	s	DIODE MA728
D40	8-719-421-27	s	DIODE MA728
D41	8-719-421-27	s	DIODE MA728
D42	8-719-421-27	s	DIODE MA728
D43	8-719-024-81	s	DIODE 1SS300-TE85L
D44	8-719-024-81	s	DIODE 1SS300-TE85L
D45	8-719-024-81	s	DIODE 1SS300-TE85L
D46	8-719-024-81	s	DIODE 1SS300-TE85L
D47	8-719-024-81	s	DIODE 1SS300-TE85L
D48	8-719-024-81	s	DIODE 1SS300-TE85L
D49	8-719-024-81	s	DIODE 1SS300-TE85L
D50	8-719-024-81	s	DIODE 1SS300-TE85L
D51	8-719-024-81	s	DIODE 1SS300-TE85L
D52	8-719-024-81	s	DIODE 1SS300-TE85L
D53	8-719-024-81	s	DIODE 1SS300-TE85L
D54	8-719-024-81	s	DIODE 1SS300-TE85L
D55	8-719-421-27	s	DIODE MA728
D56	8-719-421-27	s	DIODE MA728
D57	8-719-421-27	s	DIODE MA728
D58	8-719-421-27	s	DIODE MA728
D59	8-719-421-27	s	DIODE MA728
D60	8-719-421-27	s	DIODE MA728
D61	8-719-421-27	s	DIODE MA728
D62	8-719-421-27	s	DIODE MA728
D63	8-719-421-27	s	DIODE MA728
D64	8-719-421-27	s	DIODE MA728
D65	8-719-421-27	s	DIODE MA728
D66	8-719-421-27	s	DIODE MA728
D67	8-719-421-27	s	DIODE MA728
D68	8-719-421-27	s	DIODE MA728
D69	8-719-421-27	s	DIODE MA728
D70	8-719-421-27	s	DIODE MA728
D71	8-719-421-27	s	DIODE MA728
D72	8-719-421-27	s	DIODE MA728
D73	8-719-421-27	s	DIODE MA728
D74	8-719-421-27	s	DIODE MA728
D75	8-719-024-81	s	DIODE 1SS300-TE85L
D76	8-719-024-81	s	DIODE 1SS300-TE85L
D77	8-719-024-81	s	DIODE 1SS300-TE85L

(VIF-34/34G BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
D78	8-719-024-81	s	DIODE 1SS300-TE85L
D79	8-719-421-27	s	DIODE MA728
D80	8-719-421-27	s	DIODE MA728
D81	8-719-421-27	s	DIODE MA728
D82	8-719-421-27	s	DIODE MA728
D83	8-719-421-27	s	DIODE MA728
D84	8-719-421-27	s	DIODE MA728
D85	8-719-421-27	s	DIODE MA728
D86	8-719-421-27	s	DIODE MA728
D101	8-719-024-81	s	DIODE 1SS300-TE85L
D102	8-719-421-27	s	DIODE MA728
D103	8-719-421-27	s	DIODE MA728
D104	8-719-421-27	s	DIODE MA728
D105	8-719-421-27	s	DIODE MA728
D106	8-719-024-81	s	DIODE 1SS300-TE85L
D107	8-719-024-81	s	DIODE 1SS300-TE85L
D108	8-719-421-27	s	DIODE MA728
D109	8-719-421-27	s	DIODE MA728
D110	8-719-421-27	s	DIODE MA728
D111	8-719-421-27	s	DIODE MA728
D112	8-719-024-81	s	DIODE 1SS300-TE85L
D113	8-719-024-81	s	DIODE 1SS300-TE85L
D114	8-719-421-27	s	DIODE MA728
D115	8-719-421-27	s	DIODE MA728
D116	8-719-421-27	s	DIODE MA728
D117	8-719-421-27	s	DIODE MA728
D118	8-719-024-81	s	DIODE 1SS300-TE85L
D119	8-719-024-81	s	DIODE 1SS300-TE85L
D120	8-719-421-27	s	DIODE MA728
D121	8-719-421-27	s	DIODE MA728
D122	8-719-421-27	s	DIODE MA728
D123	8-719-421-27	s	DIODE MA728
D124	8-719-421-27	s	DIODE MA728
D125	8-719-421-27	s	DIODE MA728
D126	8-719-421-27	s	DIODE MA728
D127	8-719-421-27	s	DIODE MA728
D128	8-719-024-81	s	DIODE 1SS300-TE85L
D129	8-719-024-81	s	DIODE 1SS300-TE85L
E1	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
IC1	8-759-327-01	s	IC NJM062V-TE2
IC2	6-704-976-01	s	IC ADR381ART-REEL7
IC3	8-759-561-46	s	IC AD8014ART-REEL7
IC4	8-759-327-01	s	IC NJM062V-TE2
IC31	8-759-472-18	s	IC 74VHC138MTCX
IC32	8-752-392-03	s	IC CXD1095BR
IC33	8-759-472-43	s	IC 74VHC245MTCX
IC34	8-759-662-39	s	IC 74VHCT245AMTCX
IC35	8-759-524-04	s	IC TC74VHC125FT (EL)
IC36	8-759-524-04	s	IC TC74VHC125FT (EL)
IC101	8-752-392-03	s	IC CXD1095BR
IC102	8-759-662-39	s	IC 74VHCT245AMTCX
IC103	8-759-564-49	s	IC TC7W53FU-TE12R
IC104	8-759-561-46	s	IC AD8014ART-REEL7
IC105	8-759-561-46	s	IC AD8014ART-REEL7
IC106	8-759-561-46	s	IC AD8014ART-REEL7
IC107	8-759-745-64	s	IC NJM4560M
IC108	8-759-678-06	s	IC CAT24WC02WI-TE13

(VIF-34/34G BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
L1	1-414-398-11	s	INDUCTOR (SMD) 10UH
L2	1-414-398-11	s	INDUCTOR (SMD) 10UH
L3	1-414-398-11	s	INDUCTOR (SMD) 10UH
L4	1-414-398-11	s	INDUCTOR (SMD) 10UH
L101	1-414-398-11	s	INDUCTOR (SMD) 10UH
L102	1-414-398-11	s	INDUCTOR (SMD) 10UH
L103	1-414-398-11	s	INDUCTOR (SMD) 10UH
L104	1-414-398-11	s	INDUCTOR (SMD) 10UH
L105	1-414-398-11	s	INDUCTOR (SMD) 10UH
L106	1-414-398-11	s	INDUCTOR (SMD) 10UH
Q1	8-729-230-27	s	TRANSISTOR 2SA1213Y-TE12L
Q2	8-729-807-51	s	TRANSISTOR 2SD1623-S
Q3	8-729-927-99	s	TRANSISTOR 2SC4617R
Q5	8-729-047-32	s	TRANSISTOR SI4425DY-T1
Q6	8-729-230-27	s	TRANSISTOR 2SA1213Y-TE12L
Q31	8-729-927-99	s	TRANSISTOR 2SC4617R
Q32	8-729-927-99	s	TRANSISTOR 2SC4617R
Q33	8-729-927-99	s	TRANSISTOR 2SC4617R
Q34	8-729-927-99	s	TRANSISTOR 2SC4617R
Q35	8-729-927-99	s	TRANSISTOR 2SC4617R
Q36	8-729-927-99	s	TRANSISTOR 2SC4617R
Q37	8-729-927-99	s	TRANSISTOR 2SC4617R
Q38	8-729-927-99	s	TRANSISTOR 2SC4617R
Q39	8-729-927-99	s	TRANSISTOR 2SC4617R
Q40	8-729-927-99	s	TRANSISTOR 2SC4617R
Q41	8-729-927-99	s	TRANSISTOR 2SC4617R
Q42	8-729-927-99	s	TRANSISTOR 2SC4617R
Q43	8-729-927-99	s	TRANSISTOR 2SC4617R
Q44	8-729-927-99	s	TRANSISTOR 2SC4617R
Q45	8-729-927-99	s	TRANSISTOR 2SC4617R
Q46	8-729-927-99	s	TRANSISTOR 2SC4617R
Q101	8-729-927-99	s	TRANSISTOR 2SC4617R
Q102	8-729-927-99	s	TRANSISTOR 2SC4617R
Q103	8-729-927-99	s	TRANSISTOR 2SC4617R
Q104	8-729-927-99	s	TRANSISTOR 2SC4617R
Q105	8-729-927-99	s	TRANSISTOR 2SC4617R
Q106	8-729-927-99	s	TRANSISTOR 2SC4617R
Q107	8-729-927-99	s	TRANSISTOR 2SC4617R
Q108	8-729-927-99	s	TRANSISTOR 2SC4617R
Q109	8-729-928-19	s	TRANSISTOR 2SA1774R
R1	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R2	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R3	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R4	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R5	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R6	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R7	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R8	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R9	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R10	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R11	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R12	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R14	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R15	1-208-931-11	s	RESISTOR, CHIP 68K (1005)
R16	1-208-931-11	s	RESISTOR, CHIP 68K (1005)
R19	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R22	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R23	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R24	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)

(VIF-34/34G BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R25	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R26	1-208-703-11	s	RESISTOR,CHIP 6.8K 1/16W(1005)
R27	1-208-923-11	s	RESISTOR, CHIP 33K (1005)
R31	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R32	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R33	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R34	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R35	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R36	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R37	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R38	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R39	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R40	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R41	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R42	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R43	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R44	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R45	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R46	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R47	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R48	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R49	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R50	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R51	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R52	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R53	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R54	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R55	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R56	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R57	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R58	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R59	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R60	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R61	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R62	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R63	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R64	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R65	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R66	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R67	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R101	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R102	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R103	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R104	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R105	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R106	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R107	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R108	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R109	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R110	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R111	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R112	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R113	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R114	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R115	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R116	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R119	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R121	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R122	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)

(VIF-34/34G BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R123	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R124	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R126	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R128	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R129	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R130	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R132	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R133	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R134	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R136	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R137	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R138	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R139	1-208-663-11	s	RESISTOR CHIP 150 1/16W (1005)
R140	1-208-663-11	s	RESISTOR CHIP 150 1/16W (1005)
R141	1-208-663-11	s	RESISTOR CHIP 150 1/16W (1005)
R142	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R143	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R144	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R145	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R146	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R147	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R148	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R149	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R150	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R151	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R152	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R153	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R154	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R155	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R156	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R157	1-208-911-11	s	RESISTOR, CHIP 10K (1005)
R158	1-208-663-11	s	RESISTOR CHIP 150 1/16W (1005)
R159	1-208-663-11	s	RESISTOR CHIP 150 1/16W (1005)
R160	1-208-663-11	s	RESISTOR CHIP 150 1/16W (1005)
R161	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R162	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R163	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R164	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R165	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R166	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
RB31	1-234-381-21	s	RES, NETWORK 100KX4 (1005)
RB32	1-234-381-21	s	RES, NETWORK 100KX4 (1005)
RB33	1-234-381-21	s	RES, NETWORK 100KX4 (1005)
RB34	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB35	1-234-381-21	s	RES, NETWORK 100KX4 (1005)
RB36	1-234-381-21	s	RES, NETWORK 100KX4 (1005)
RB37	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB38	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB39	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB40	1-234-372-11	s	RES, NETWORK 100X4 (1005)
RB41	1-233-577-11	s	RESISTOR, CHIP NETWORK 470
RB42	1-233-577-11	s	RESISTOR, CHIP NETWORK 470
RB43	1-233-810-21	s	RES, NETWORK 100K (3216)
RB44	1-234-378-11	s	RES, NETWORK 10KX4 (1005)
RB45	1-234-378-11	s	RES, NETWORK 10KX4 (1005)
RB46	1-233-810-21	s	RES, NETWORK 100K (3216)
RB47	1-233-810-21	s	RES, NETWORK 100K (3216)
RB48	1-233-810-21	s	RES, NETWORK 100K (3216)
RB49	1-233-578-11	s	RESISTOR,CHIP NETWORK 47K

(VIF-34/34G BOARD)

Ref. No. or Q'ty	Part No.	SP	Description	
RB50	1-233-578-11	s	RESISTOR,CHIP NETWORK 47K	
RB51	1-233-577-11	s	RESISTOR, CHIP NETWORK 470	
RB52	1-233-578-11	s	RESISTOR,CHIP NETWORK 47K	
RB53	1-233-577-11	s	RESISTOR, CHIP NETWORK 470	
RB54	1-233-578-11	s	RESISTOR,CHIP NETWORK 47K	
RB55	1-234-380-11	s	RESISTOR,NETWORK 47KX4	(1005)
RB56	1-233-578-11	s	RESISTOR,CHIP NETWORK 47K	
RB57	1-233-578-11	s	RESISTOR,CHIP NETWORK 47K	
RB58	1-234-380-11	s	RESISTOR,NETWORK 47KX4	(1005)
RB62	1-233-577-11	s	RESISTOR, CHIP NETWORK 470	
RB63	1-233-577-11	s	RESISTOR, CHIP NETWORK 470	
RB101	1-233-810-21	s	RES, NETWORK 100K	(3216)
RB102	1-233-810-21	s	RES, NETWORK 100K	(3216)
RB103	1-233-810-21	s	RES, NETWORK 100K	(3216)
RB104	1-234-378-11	s	RES, NETWORK 10KX4	(1005)
RB105	1-233-577-11	s	RESISTOR, CHIP NETWORK 470	
RB106	1-233-578-11	s	RESISTOR,CHIP NETWORK 47K	
RB107	1-233-577-11	s	RESISTOR, CHIP NETWORK 470	
RB108	1-233-578-11	s	RESISTOR,CHIP NETWORK 47K	
THP1	⚠ 1-804-458-21	s	THERMISTOR, POSITIVE	
THP2	⚠ 1-804-458-21	s	THERMISTOR, POSITIVE	
THP3	⚠ 1-803-615-11	s	THERMISTOR, POSITIVE	
THP4	⚠ 1-803-615-11	s	THERMISTOR, POSITIVE	
THP5	⚠ 1-803-615-11	s	THERMISTOR, POSITIVE	
THP6	⚠ 1-804-458-21	s	THERMISTOR, POSITIVE	

4-4. Packing Materials & Supplied Accessories

HDCU1000/1080/1500

*1: Serial No.10001 through 15999 (HDCU1000: UC)
30001 through 35999 (HDCU1000: J)
60001 through 61999 (HDCU1000: E2)
*2: Serial No.40001 through 429999 (HDCU1000: CE)
50001 through 51999 (HDCU1000: E3)
50001 through 53999 (HDCU1080: CN)
*3: Serial No.16001 and Higher (HDCU1000: UC)
36001 and Higher (HDCU1000: J)
62001 and Higher (HDCU1000: E2)
*4: Serial No.430001 and Higher (HDCU1000: CE)
52001 and Higher (HDCU1000: E3)
54001 and Higher (HDCU1080: CN)

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8278-054-A	s	REMOTE INDICATOR ASSY
1pc *2 ⚠	1-576-231-51	s	FUSE (H.B.C.) (for HDCU1000)
1pc *1, 4 ⚠	1-576-233-51	s	FUSE (H.B.C.) (for HDCU1000)
1pc *3 ⚠	1-576-300-51	s	FUSE (H.B.C.) (for HDCU1000)
1pc	3-903-898-01	s	OPERATION MANUAL (for HDCU1000/1500)
1pc	3-992-287-01	s	OPERATION MANUAL (for HDCU1080)

HKCU1001/1003

Ref. No. or Q'ty	Part No.	SP	Description
1pc	1-560-155-00	s	CONNECTOR (PLUG) (for HKCU1001/1003)

4-5. Optional Fixtures List

Optional Fixtures

Part No.	SP	Description
A-1153-700-A	s	MOUNTED CIRCUIT BOARD, EX-982
A-1153-701-A	s	MOUNTED CIRCUIT BOARD, EX-983
A-1153-715-A	s	MOUNTED CIRCUIT BOARD, EX-984
J-6480-010-A	o	ALIGNMENT SLEEVE REMOVER
J-7120-140-A	o	PLD DOWNLOAD JIG

Section 5
Semiconductor Pin Assignments

The following describes the semiconductor types used in this unit.
For semiconductors marked with page numbers in the index, refer to the corresponding pages in this section. However, in some cases incompatible types are also listed, therefore, when a part is to be replaced, also refer to the Spare Parts section.
In addition, for semiconductors with ID Nos., refer to the separate CD-ROM titled “Semiconductor Pin Assignments” (Sony Part No. 9-968-546-xx) that allows searching for parts by semiconductor type or ID No.
The semiconductors in the manual or on the CD-ROM are listed by equivalent types. Thus the external view or the index mark indication may differ from the actual type.
Pin assignments and block diagrams are based on the IC manufacturer’s data book.

本機に使用されている半導体型名の一覧を下記に示します。
索引中，ページが記載されている半導体は，本章の該当ページを参照してください。ただし，互換性のない型名を併記している場合がありますので，部品を交換するときは，Spare Partsの章を参照してください。
また，ID番号が記載されている半導体は，別途発行の “Semiconductor Pin Assignments” CD-ROM版 (ソニー部品番号：9-968-546-xx)を参照してください。
半導体型名またはID番号から検索ができます。
マニュアルまたはCD-ROMに掲載されている半導体は，それぞれの機能を等価的に表わしたものです。
外観やインデックスマークの表示方法が実物と異なる場合があります。
ピン配置およびブロック図はICメーカーのデータブックに従いました。

DIODE — **Page or ID No.**

02DZ2.0-TPH3 ..... DC008-04
02DZ4.7-TPH3 ..... DC008-04
02DZ5.1-TPH3 ..... DC008-04

1SS184 ..... DC001-03
1SS300-TE85L DC001-02
1SS301-TE85L DC001-03
1SS302 ..... DC001-01
1SS302-TE85L DC001-01
1SS362-TE85L DC001-01

MA728 ..... DC008-01
MA728-TX DC008-01
MA8051-M DC008-04

RB706F-40 ..... DC001-01

LED — **Page or ID No.**

CL-155UR/G-D LC009-03
CL-191Y-CD-T LC004-01
CL-191YG-CD-T LC004-01
CL-196HR-CD-T LC001-01
CL-196YG-CD-T LC001-01

F1J6 ..... LC001-01
F1J6TP LC001-01

SML-510MWT86 ..... LC004-01

TRANSISTOR — **Page or ID No.**

2SA1213Y-TE12L TC002-01
2SA1226-E4 ..... TC001-01
2SA1226-T1E3E4 ..... TC001-01
2SA1615-Z-K TC010-02
2SA1774R TC001-01
2SC3356-K TC001-02
2SC3356-T1K TC001-02
2SC4176-B34 ..... TC001-02
2SC4176T1B33B34B35 ..... TC001-02
2SC4617R TC001-02
2SD1623-S TC002-02
2SD596DV345 ..... TC001-02
2SK1332-3 ..... TC001-05

DTA144EE TC001-04
DTA144EE-TL TC001-04
DTC144EE TC001-03
DTC144EE-TL TC001-03

NDS355AN TC001-07
NDS356AP TC001-20

SI4425DY-T1 ..... TC012-04

Index

IC	Page or ID No.
74VHC00MTCX	TC74HC00P
74VHC04MTCX	TC74HC04P
74VHC08MTCX	TC74HC08P
74VHC125MTCX	MC74HC125N
74VHC138MTCX	TC74HC138P
74VHC244MTCX	TC74HC244P
74VHC245MTCX	TC74HC245P
74VHC32MTCX	TC74HC32P
74VHC4053MTCX	MC74HC4053F
74VHC574MTCX	TC74HC574P
74VHCT00AMTCX	TC74HC00P
74VHCT08AMTCX	TC74HC08P
74VHCT245AMTCX	TC74HC245P
AD8014ART-REEL7	AD8055ART-REEL7
ADR381ART-REEL7	MAX6066BEUR-T
AK4552VT-E2	AK4552VT-E2
BCM5221A4KPT	BCM5221A4KPT
BU2500FV-E2	M62352P
CXB1340N	CXB1340N
CXB1342R	CXB1342R
CXD1095BR	CXD1095AR
CXD1171M	CXD1171M
CXD1176Q	CXD1176Q
CXD1176Q-T4	CXD1176Q
CXD1216M	CXD1216M
CXD1216M-TH	CXD1216M
CXD2309AQ-T6	CXD2309Q-T6
CXD2315Q-T4	CXD2306Q
CXD9093R	CXD9093R
CY2309ZC-1HT	CY2309ZC-1HT
EPC2LC20-TP	EPC2LC20
EPC2LC20N-TP	EPC2LC20
FM18L08-70-STR	FM1808-70-STR
HCPL-0630-500	MA009-01
IS42S32200B-6TL-TR	IS42S32200B-6TL-TR
L78M05T-FA	L78M05T-FA
LC4032V-75TN48C	LC4032V-25T48C
LM45BIM3X	LM45BIM3X
MB86189PFV-G-BND-ER	MB86189PFV-G-BND-ER
MBM29LV160B-90PFTN	MBM29LV160B-90PTFN
MC10EP57DTR2	MC10EP57DTR2
MC14053BDTR2	MC74HC4053F
MC74HC4046ADTR2	CD4046BE
MC74HC4052ADTR2	MC74HC4052N
MT48LC8M16A2P-75-Y15WTR	HY57V281620AT-P
NC7SZ04P5X	TC7S04F
NC7SZ08P5	TC7S08F
NC7SZ32P5X	TC7S32F
NJM062V(TE2)	RC4558
NJM062V-TE2	RC4558
NJM2903V(TE2)	UA393DC
NJM4558V-TE2	RC4558
NJM4560M	RC4558
NJM4580V(TE2)	RC4558
NJM4580VTE2	RC4558
NJM78M05DL1A-TE1	NJM78M12DLA_TE1
RN5VD28AA-TL	S-80928ANMP-DDR-T2
RTC4574JE-TP	RTC4574JE-TP
SN74CBT3253PWR-12	SN74CBT3253PW-E20
SN74LVC04APWR	TC74HC04P
SN74LVC08APWR	TC74HC08P
SN74LVC125APWR-12	MC74HC125N
SN74LVC138APWR-12	TC74HC138P
SN74LVC157APWR	TC74HC157P
SN74LVC245APWR	TC74HC245P
SN74LVC574APWR	TC74HC574P
SN74LVC74APWR-12	TC74HC74P
SN75158PS	SN75158P
TC4W66FU(TE12R)	TC4W66F
TC4W66FU	TC4W66F
TC74HC4052AFT(EL)	MC74HC4052N
TC74HC4053AFT(EL)	MC74HC4053F
TC74HC4538AFT(EL)	MC74HC4538N
TC74HC4538AFT	MC74HC4538N
TC74VHC02FT(EL)	TC74HC02P
TC74VHC02FT	TC74HC02P
TC74VHC125FT(EL)	MC74HC125N
TC74VHC244FT(EL)	TC74HC244P
TC7SZ00FU(TE85R)	TC7S00F
TC7SZ04FU(TE85R)	TC7S04F
TC7SZ08FU(TE85R)	TC7S08F
TC7SZ125FU(TE85R)	NC7SZ125P5
TC7W53FU(TE12R)	TC4W53FU
TC7W53FU-TE12R	TC4W53FU
TC7WH04FU(TE12R)	TC7W04F
TL712CPS	TL712CP
TLC272CPS	RC4558
TLC272CPWR	RC4558
TLC272CPWR-12	RC4558
TPS54610PWPR	TPS54610PWPR
UPD6466GS-515	UPD6466GS-502-E2
UPD6467GR-525-E2	UPD6466GS-502-E2

Section 6
Block Diagrams

Index

Board Name	Function	Page
Overall (HDCU1000)	–	6-2, 6-3
Overall (HDCU1080)	–	6-4, 6-5
Overall (HDCU1500)	–	6-6, 6-7
ADO-10	SIGNAL INTERFACE	6-2, 6-3, 6-4, 6-5, 6-6, 6-7
AT-167	SYSTEM CONTROLLER	6-8
AU-302	FRONT INTERCOM INTERFACE	6-10
AU-303	FRONT INTERCOM INTERFACE	6-10
AVP-6	AUDIO, TALLY	6-11
CN-2672	CONNECTOR (RCP/CNU)	6-2, 6-3, 6-4, 6-5
CN-2673	CONNECTOR (MIC)	6-2, 6-3, 6-4, 6-5
CN-2674	CONNECTOR (VBS/PROMPTER)	6-2, 6-3, 6-4, 6-5, 6-16
CN-2675	CONNECTOR (RCP/CNU/TRUNK)	6-6, 6-7, 6-17
CN-2676	CONNECTOR (MIC)	6-6, 6-7
CN-2677	CONNECTOR	6-6, 6-7
CN-2678	CONNECTOR (INTERCOM)	6-6, 6-7
CN-2700	CONNECTOR (INTERCOM)	6-2, 6-3, 6-4, 6-5
CN-2718	CONNECTOR	6-2, 6-3, 6-4, 6-5
CN-2805	CONNECTOR (TRUNK)	6-2, 6-3, 6-4, 6-5
CN-3275	POWER BLOCK ASSEMBLY (A10)	6-21
CNB-21	CONNECTOR INTERFACE	6-2, 6-3, 6-4, 6-5
CNB-22	CONNECTOR INTERFACE	6-6, 6-7
DRX-5	VIDEO PROCESSOR	6-12
DTX-5	HD/SD/VBS RETURN SIGNAL CONVERTER	6-13
DU-390	THROUGH BOARD	6-4, 6-5
EN-159A	SD ENCODER UNIT	6-14
EN-159B	SD ENCODER & COMPONENT VIDEO UNIT	6-14
HIF-25	SDI OUTPUT	6-15
HIF-26	SDI OUTPUT	6-15
HIF-27	SDI OUTPUT	6-15
MB-1071/1071A	MOTHERBOARD	6-2, 6-3, 6-4, 6-5
MB-1072	MOTHERBOARD	6-6, 6-7
PS-778	POWER BLOCK ASSEMBLY (D00)	6-22
PS-780	POWER BLOCK ASSEMBLY (A10)	6-21
PS-781	POWER BLOCK ASSEMBLY (A10)	6-21
RE-274	POWER BLOCK ASSEMBLY (D00)	6-22
RE-276	POWER BLOCK ASSEMBLY (A10)	6-21
SDI-85	RETURN HD INPUT	6-15
SDI-86	RETURN SD INPUT	6-16
SDI-87	RETURN INPUT	6-17
SDP-12	OPTICAL INTERFACE	6-18
VDA-64A	SD ANALOG VIDEO OUTPUT	6-19
VDA-64B	FRAME REFERENCE INPUT & SD ANALOG VIDEO OUTPUT	6-19
VDA-64C	SD ANALOG VIDEO OUTPUT	6-19
VIF-34B	CONNECTOR INTERFACE	6-20
VIF-34	CONNECTOR INTERFACE	6-20

Board List

Board Name	HDCU1000	HDCU1080	HDCU1500	HKCU1001	HKCU1003	HKCU1005
ADO-10/10G*	○	○	○	–	–	–
AT-167	○	○	○	–	–	–
AU-302	○	○	–	–	–	–
AU-303/303G*	–	–	○	–	–	–
AVP-6	○	○	○	–	–	–
CN-2672/2672G*	○	○	–	–	–	–
CN-2673	○	○	–	–	–	–
CN-2674/2674G*	○	○	–	–	–	–
CN-2675/2675G*	–	–	○	–	–	–
CN-2676	–	–	○	–	–	–
CN-2677/2677G*	–	–	○	–	–	–
CN-2678	–	–	○	–	–	–
CN-2700	○	○	–	–	–	–
CN-2718	○	○	–	–	–	–
CN-2805/2805G*	○	○	–	–	–	–
CN-3275	○	○	–	–	–	–
CNB-21/21G*	○	○	–	–	–	–
CNB-22/22G*	–	–	○	–	–	–
DRX-5	○	○	○	–	–	○
DTX-5	○	○	○	–	–	–
DU-390	–	○	–	–	–	–
EN-159A	–	–	–	○	–	–
EN-159B	–	–	–	–	○	–
HIF-25	○	○	–	–	–	–
HIF-26	–	–	–	–	–	○
HIF-27	–	–	○	–	–	–
MB-1071/1071A	○	○	–	–	–	–
MB-1072/1072G*	–	–	○	–	–	–
PS-778	–	–	○	–	–	–
PS-780	○	○	–	–	–	–
PS-781	○	○	–	–	–	–
RE-274	–	–	○	–	–	–
RE-276	○	○	–	–	–	–
SDI-85	○	○	–	–	–	–
SDI-86/86G*	○	○	–	–	–	–
SDI-87/87G*	–	–	○	–	–	–
SDP-12/12C	○	○	○	–	–	–
VDA-64A	–	–	–	○	○	–
VDA-64B	–	–	–	–	○	–
VDA-64C	–	–	–	–	○	–
VIF-34B/34BG*	–	–	○	–	–	–
VIF-34/34G*	○	○	–	–	–	–

注意

＊印の基板は2種類ありますが，マニュアル内の記載では簡素化するため基板名には“G”を付けていません。

Note

The board with an asterisk (*) has two types. However, the board name in the manual does not have “G” at the end for simplification.

Overall (HDCU1000)

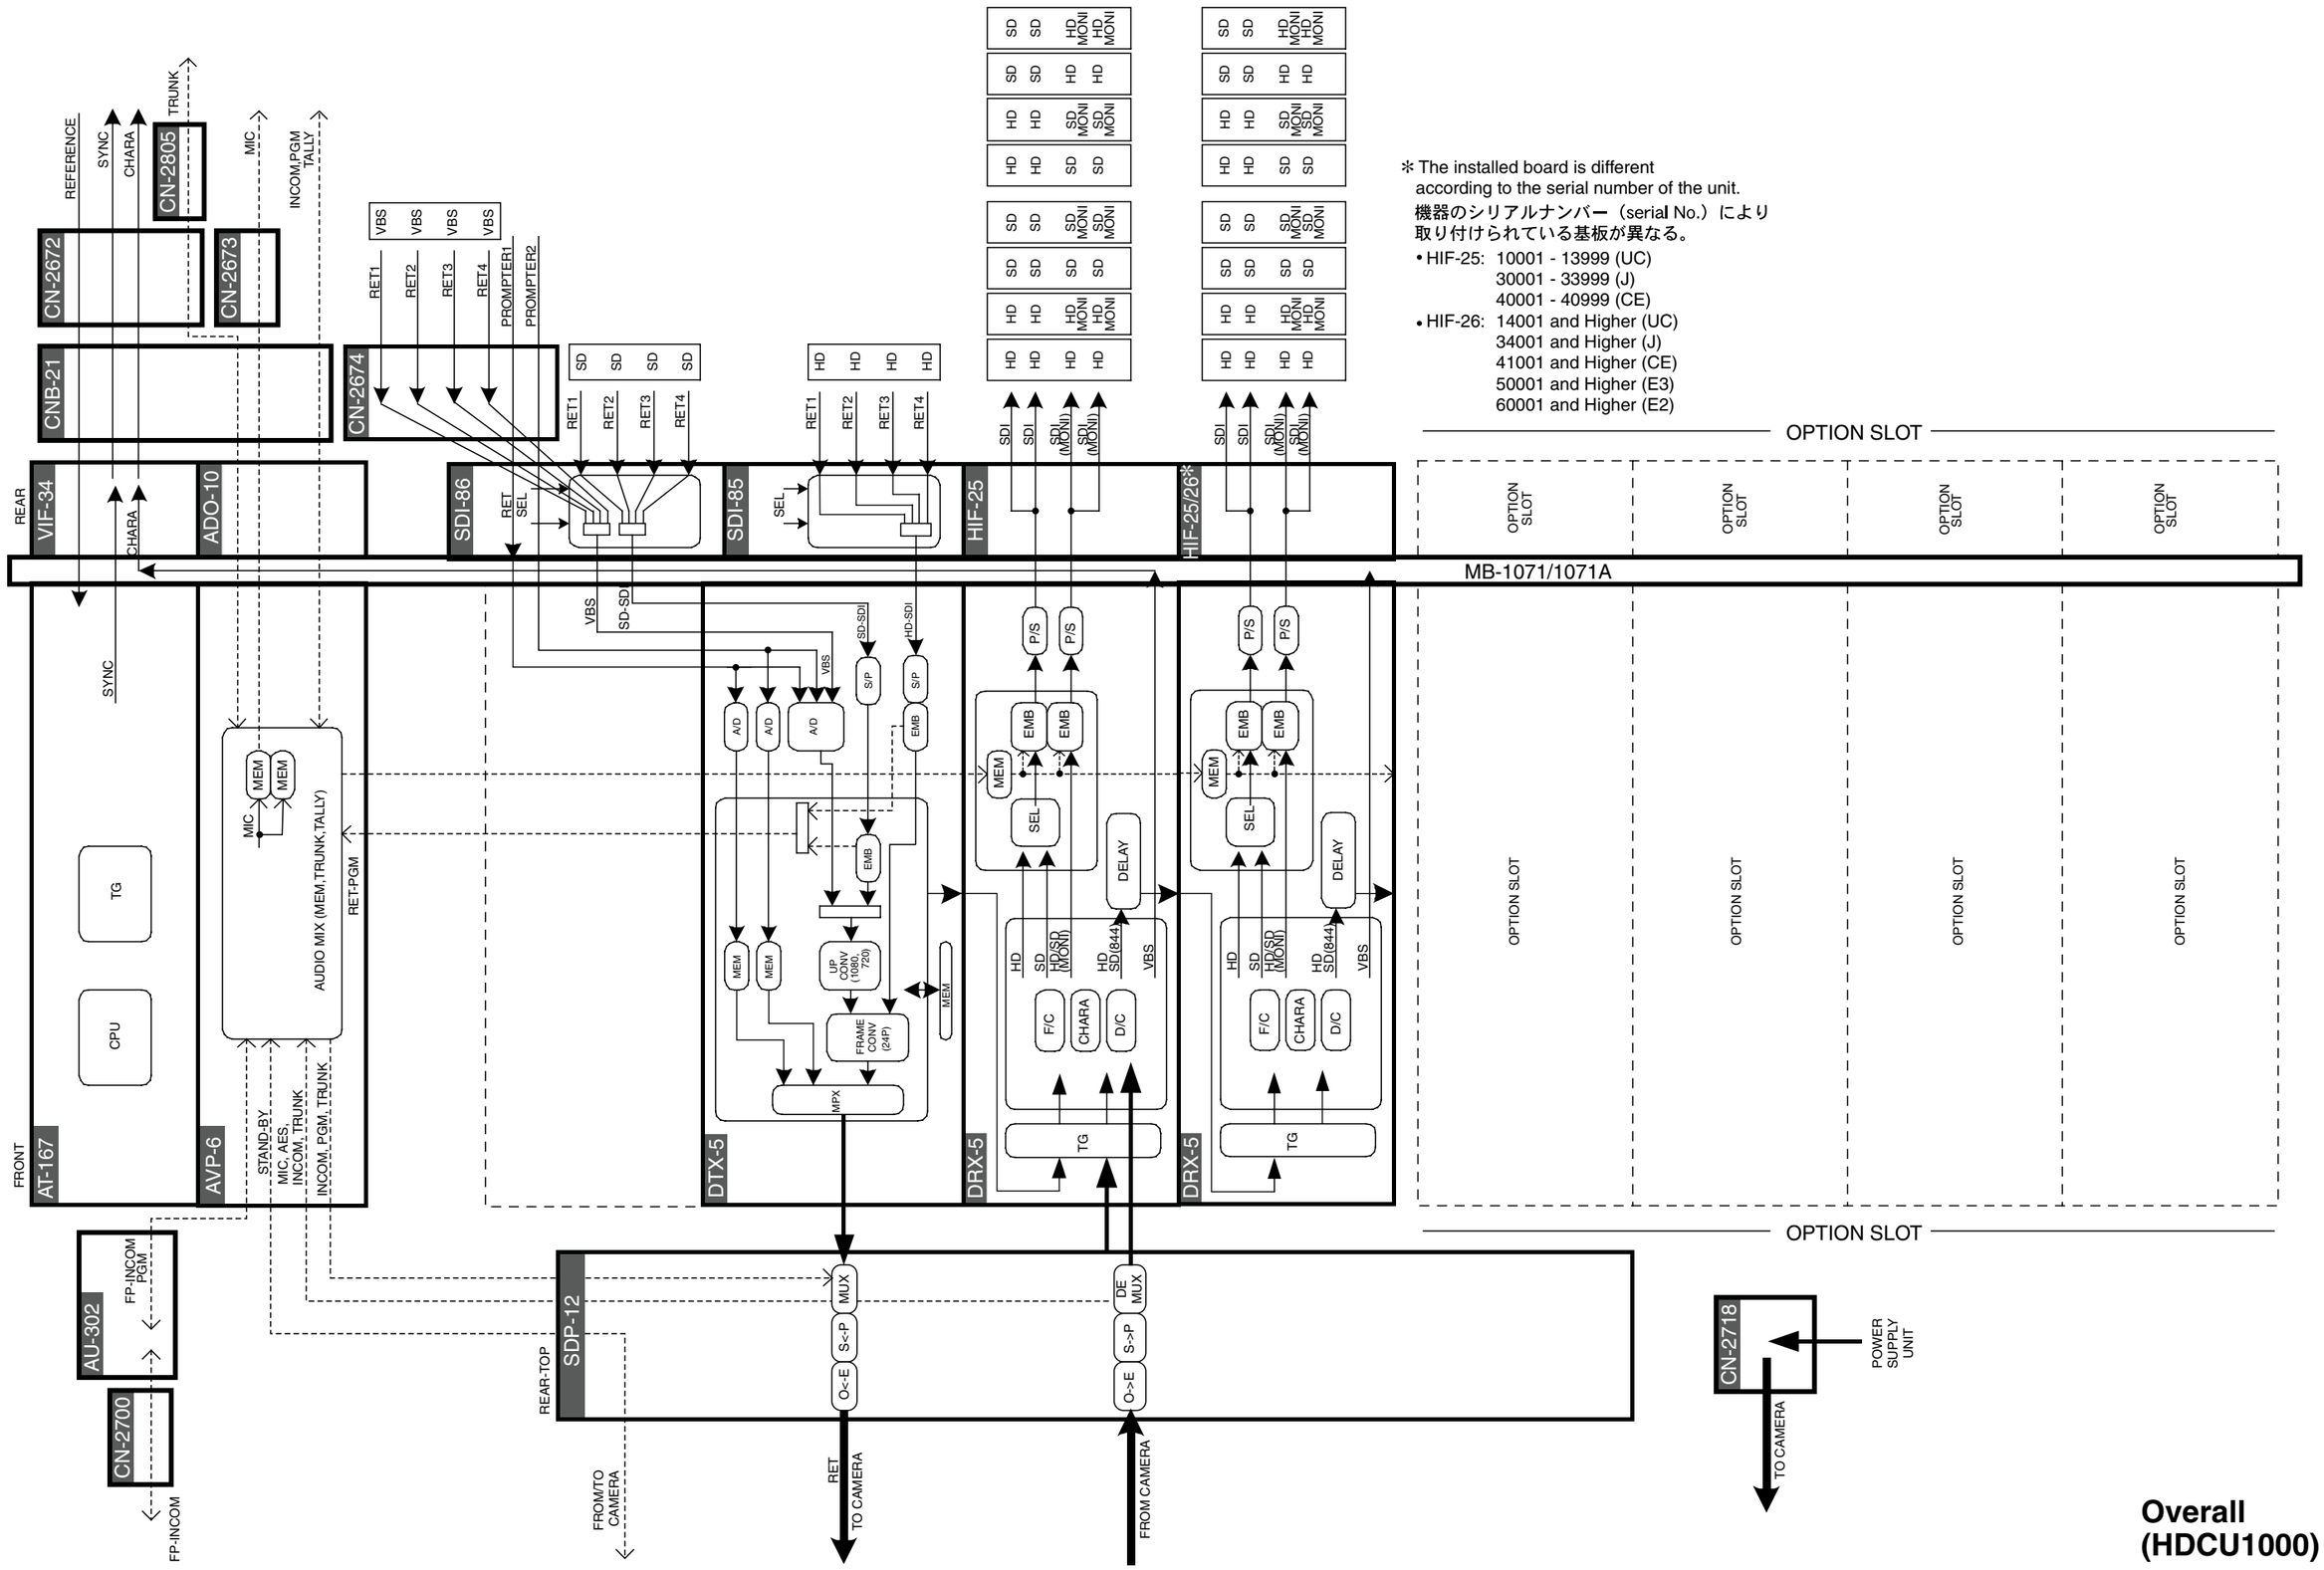

＊The installed board is different according to the serial number of the unit.
機器のシリアルナンバー（serial No.）により取り付けられている基板が異なる。

- HIF-25: 10001 - 13999 (UC)
  30001 - 33999 (J)
  40001 - 40999 (CE)
- HIF-26: 14001 and Higher (UC)
  34001 and Higher (J)
  41001 and Higher (CE)
  50001 and Higher (E3)
  60001 and Higher (E2)

Overall (HDCU1000)

6-2

Overall (Option side) (HDCU1000)

※ The installed board is different according to the serial number of the unit.
機器のシリアルナンバー（serial No.）により取り付けられている基板が異なる。
- HIF-25: 10001 - 13999 (UC)
  30001 - 33999 (J)
  40001 - 40999 (CE)
- HIF-26: 14001 and Higher (UC)
  34001 and Higher (J)
  41001 and Higher (CE)
  50001 and Higher (E3)
  60001 and Higher (E2)

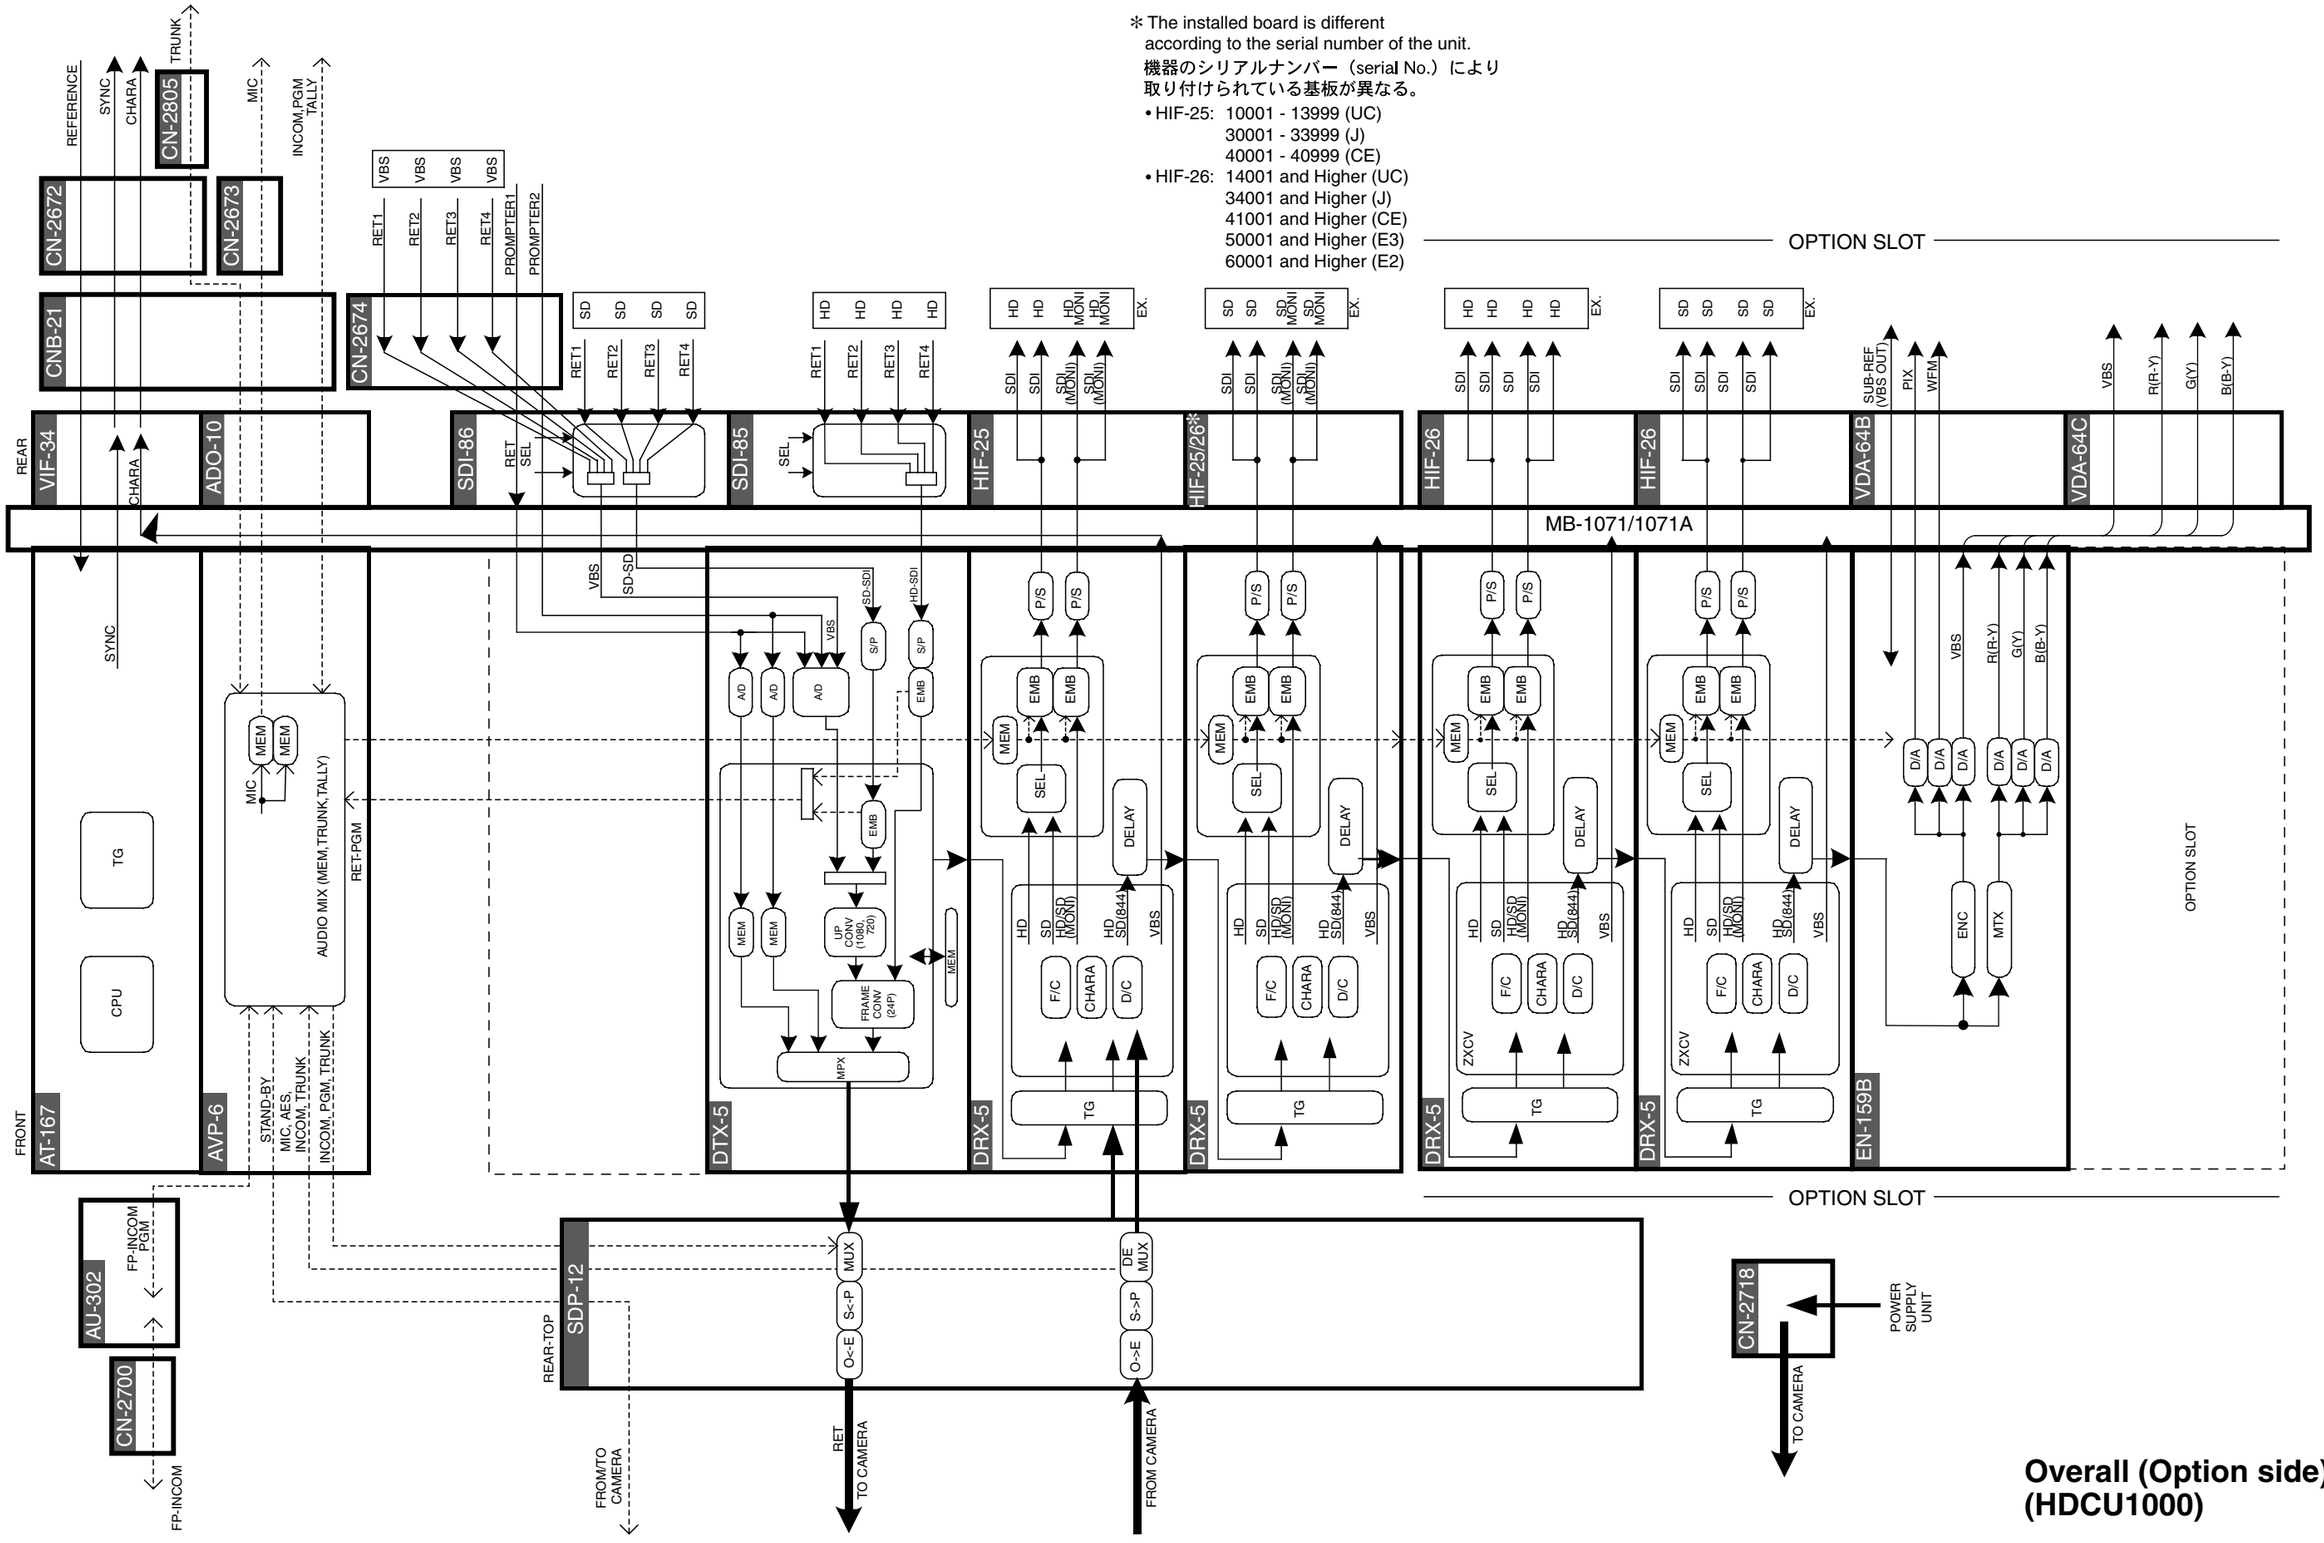

Overall (Option side) (HDCU1000)

6-3

Overall (HDCU1080)

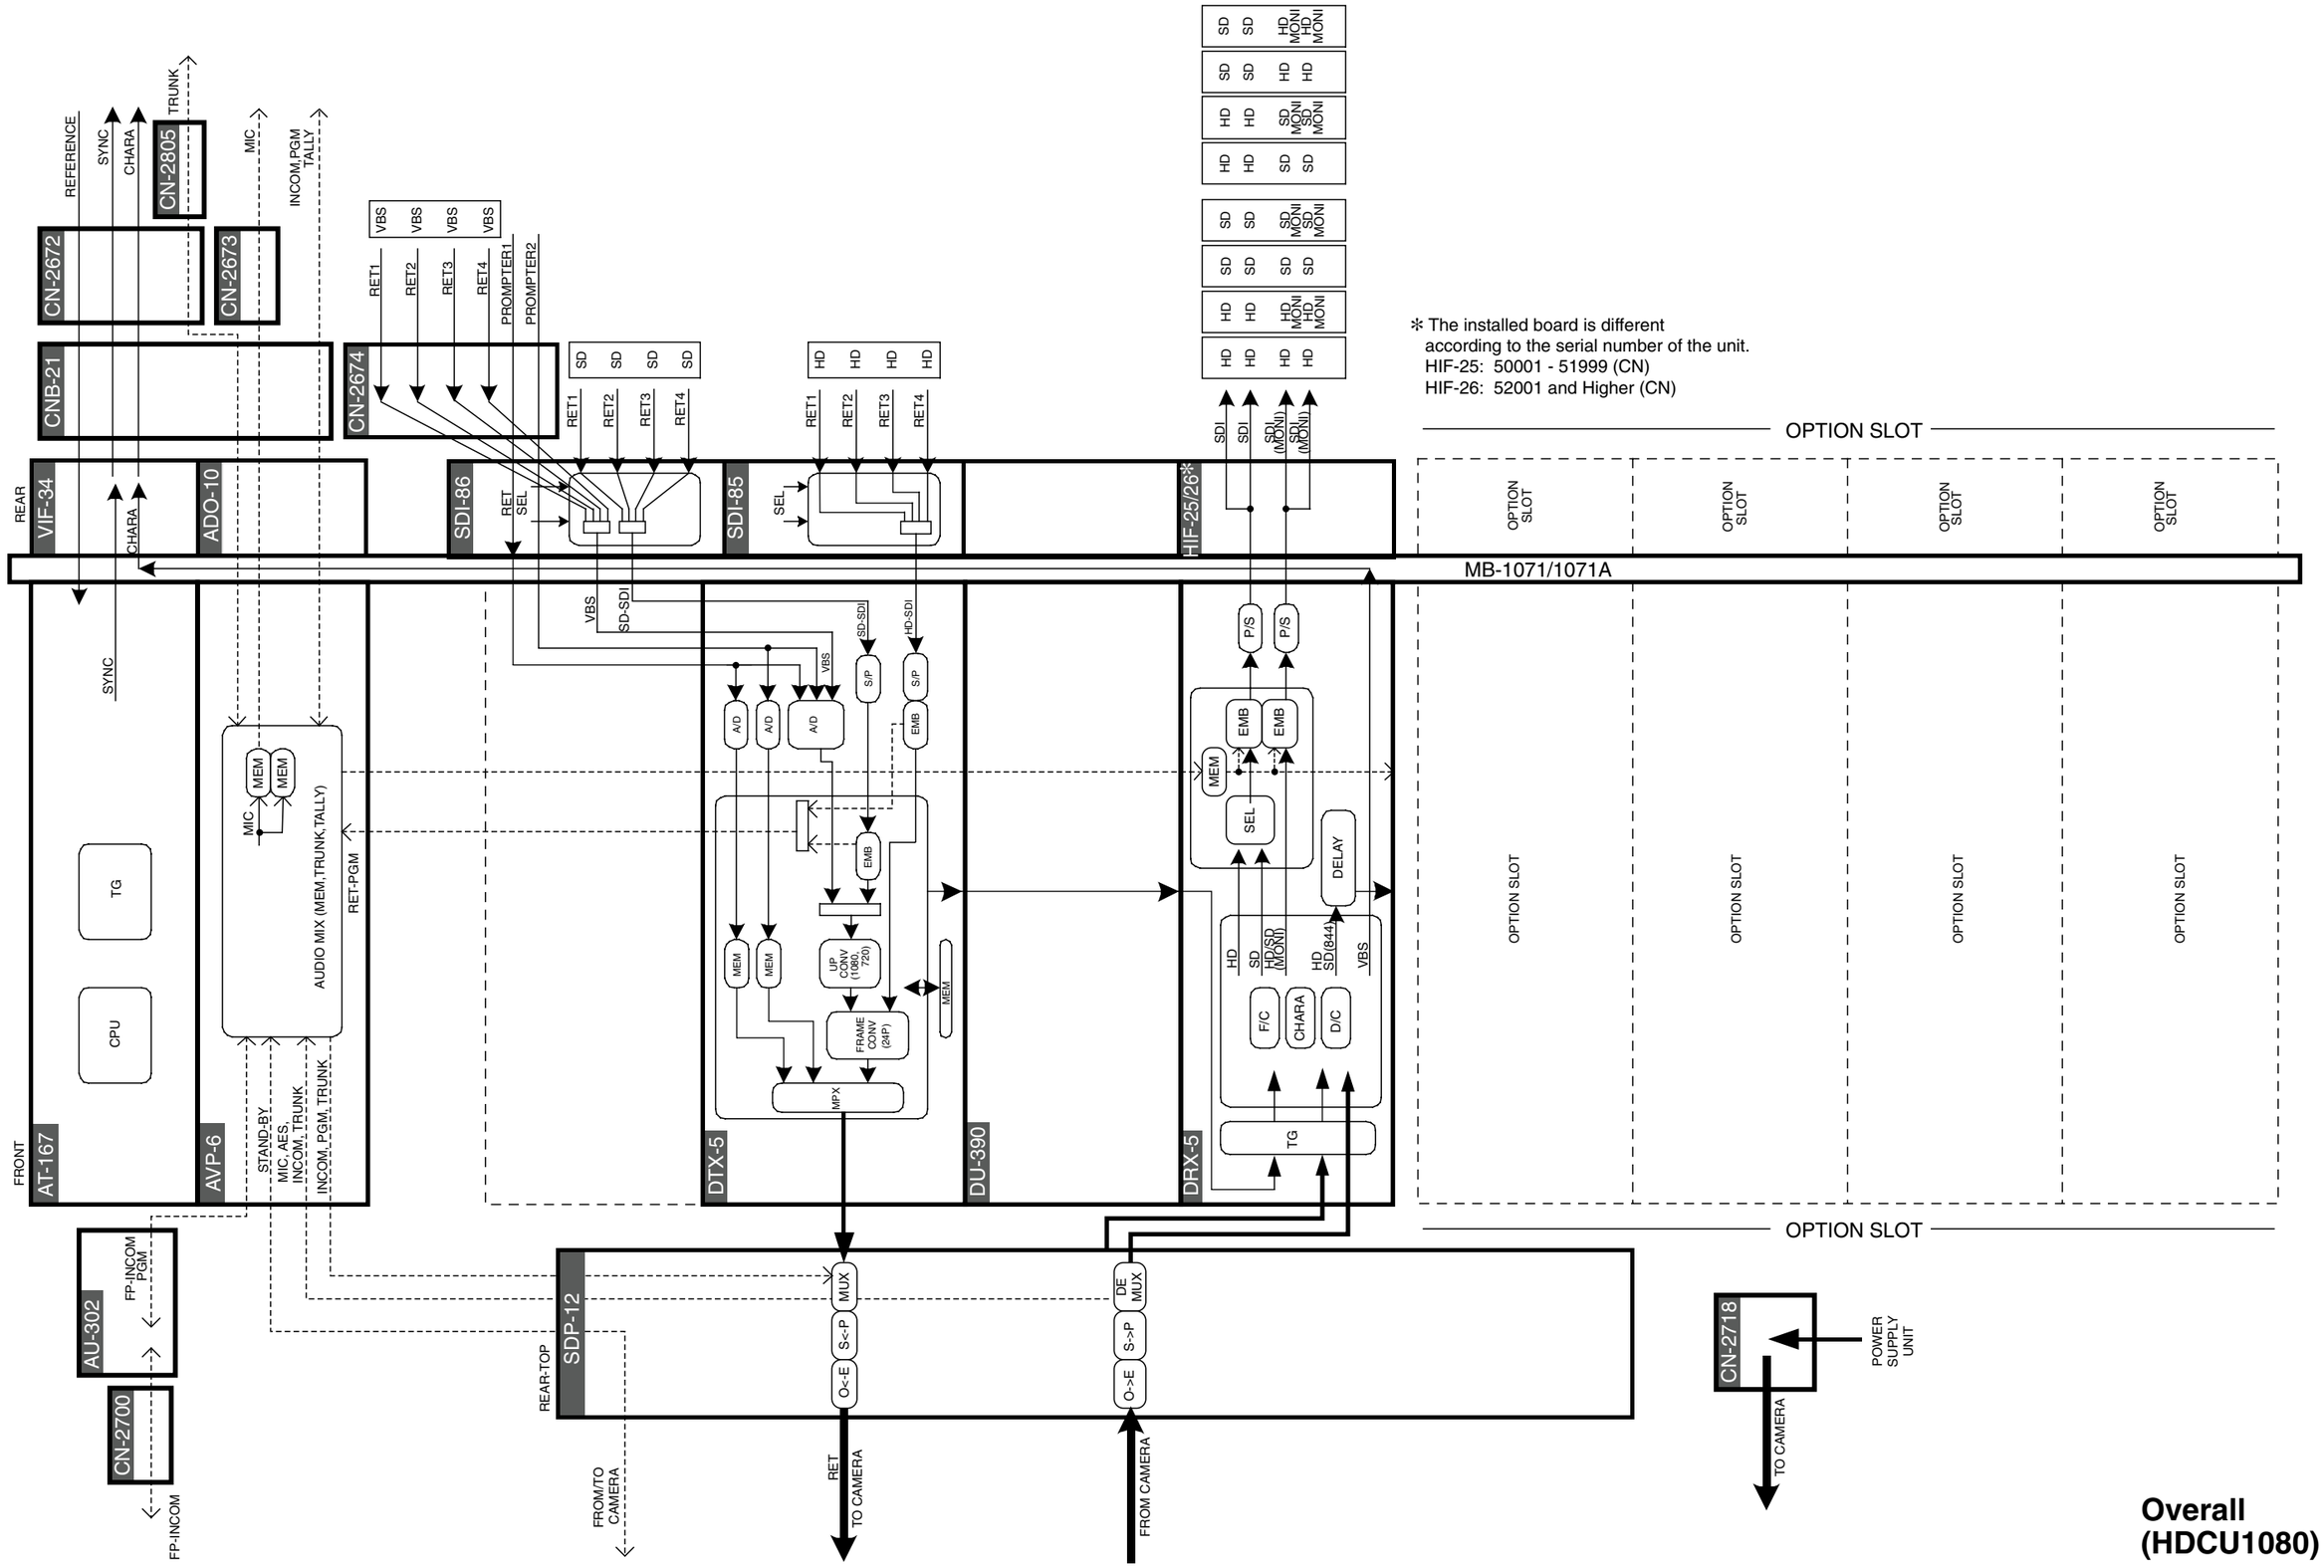

6-4

Overall (HDCU1080)

Overall (Option side) (HDCU1080)

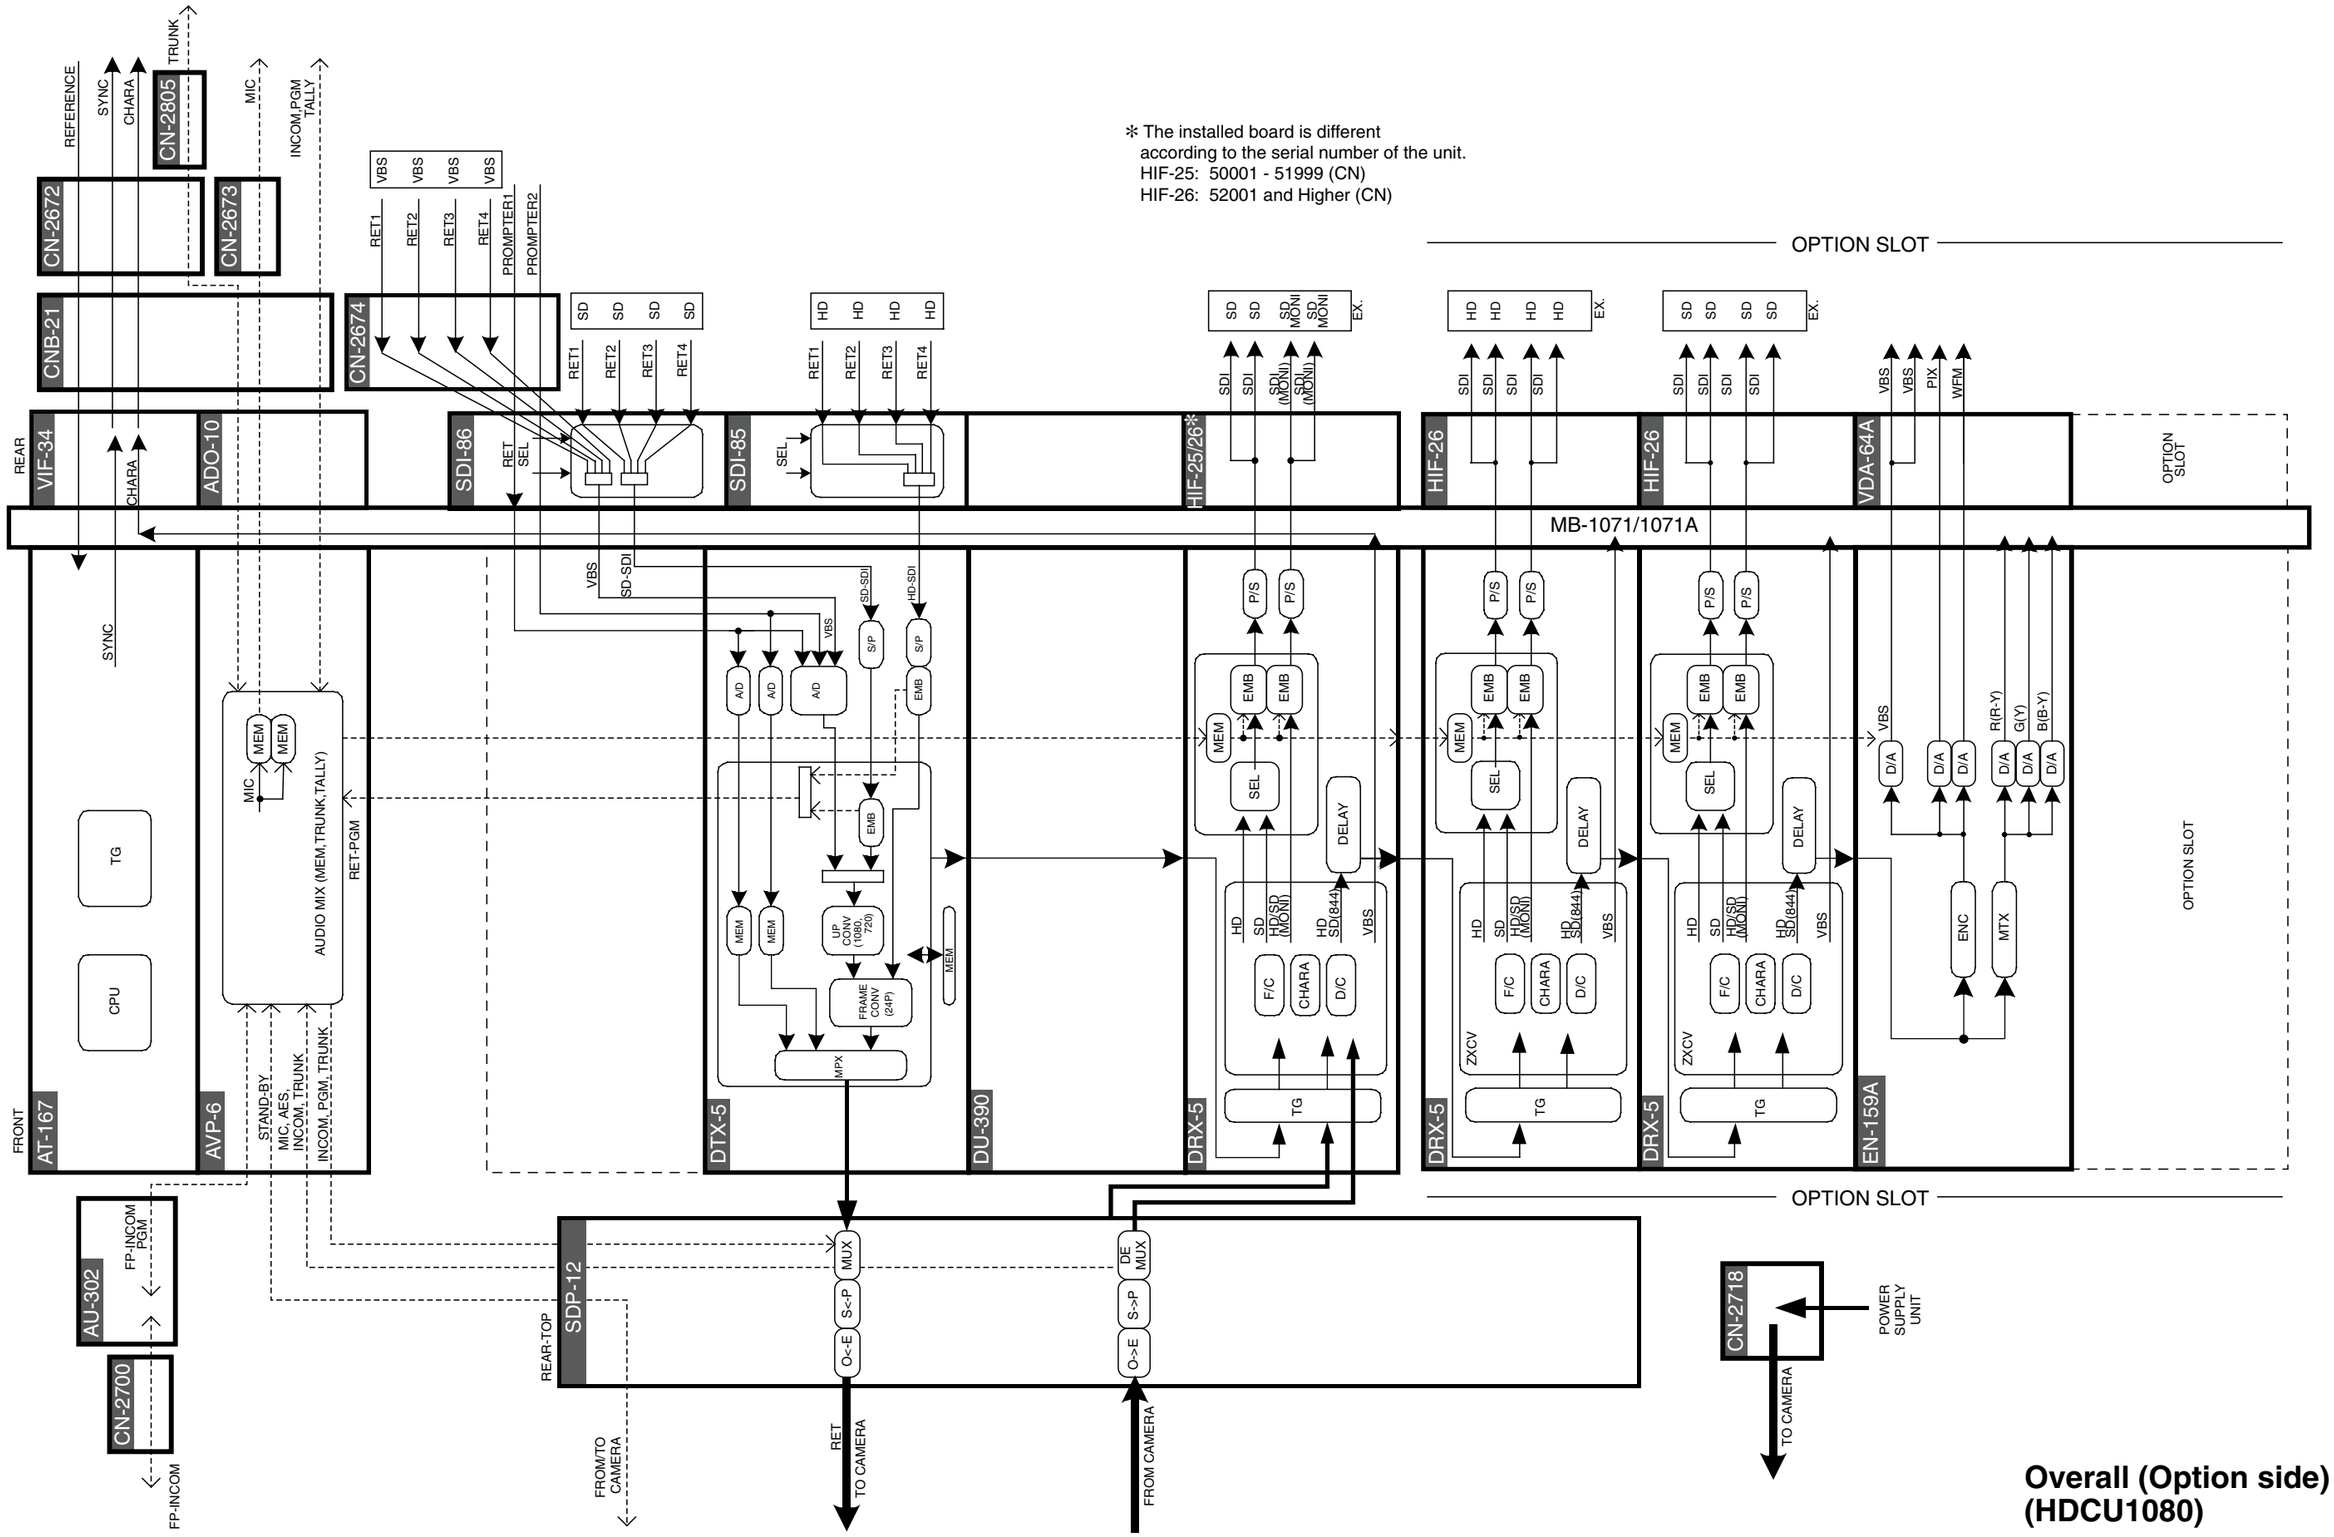

Overall (Option side) (HDCU1080)

6-5

Overall (HDCU1500)

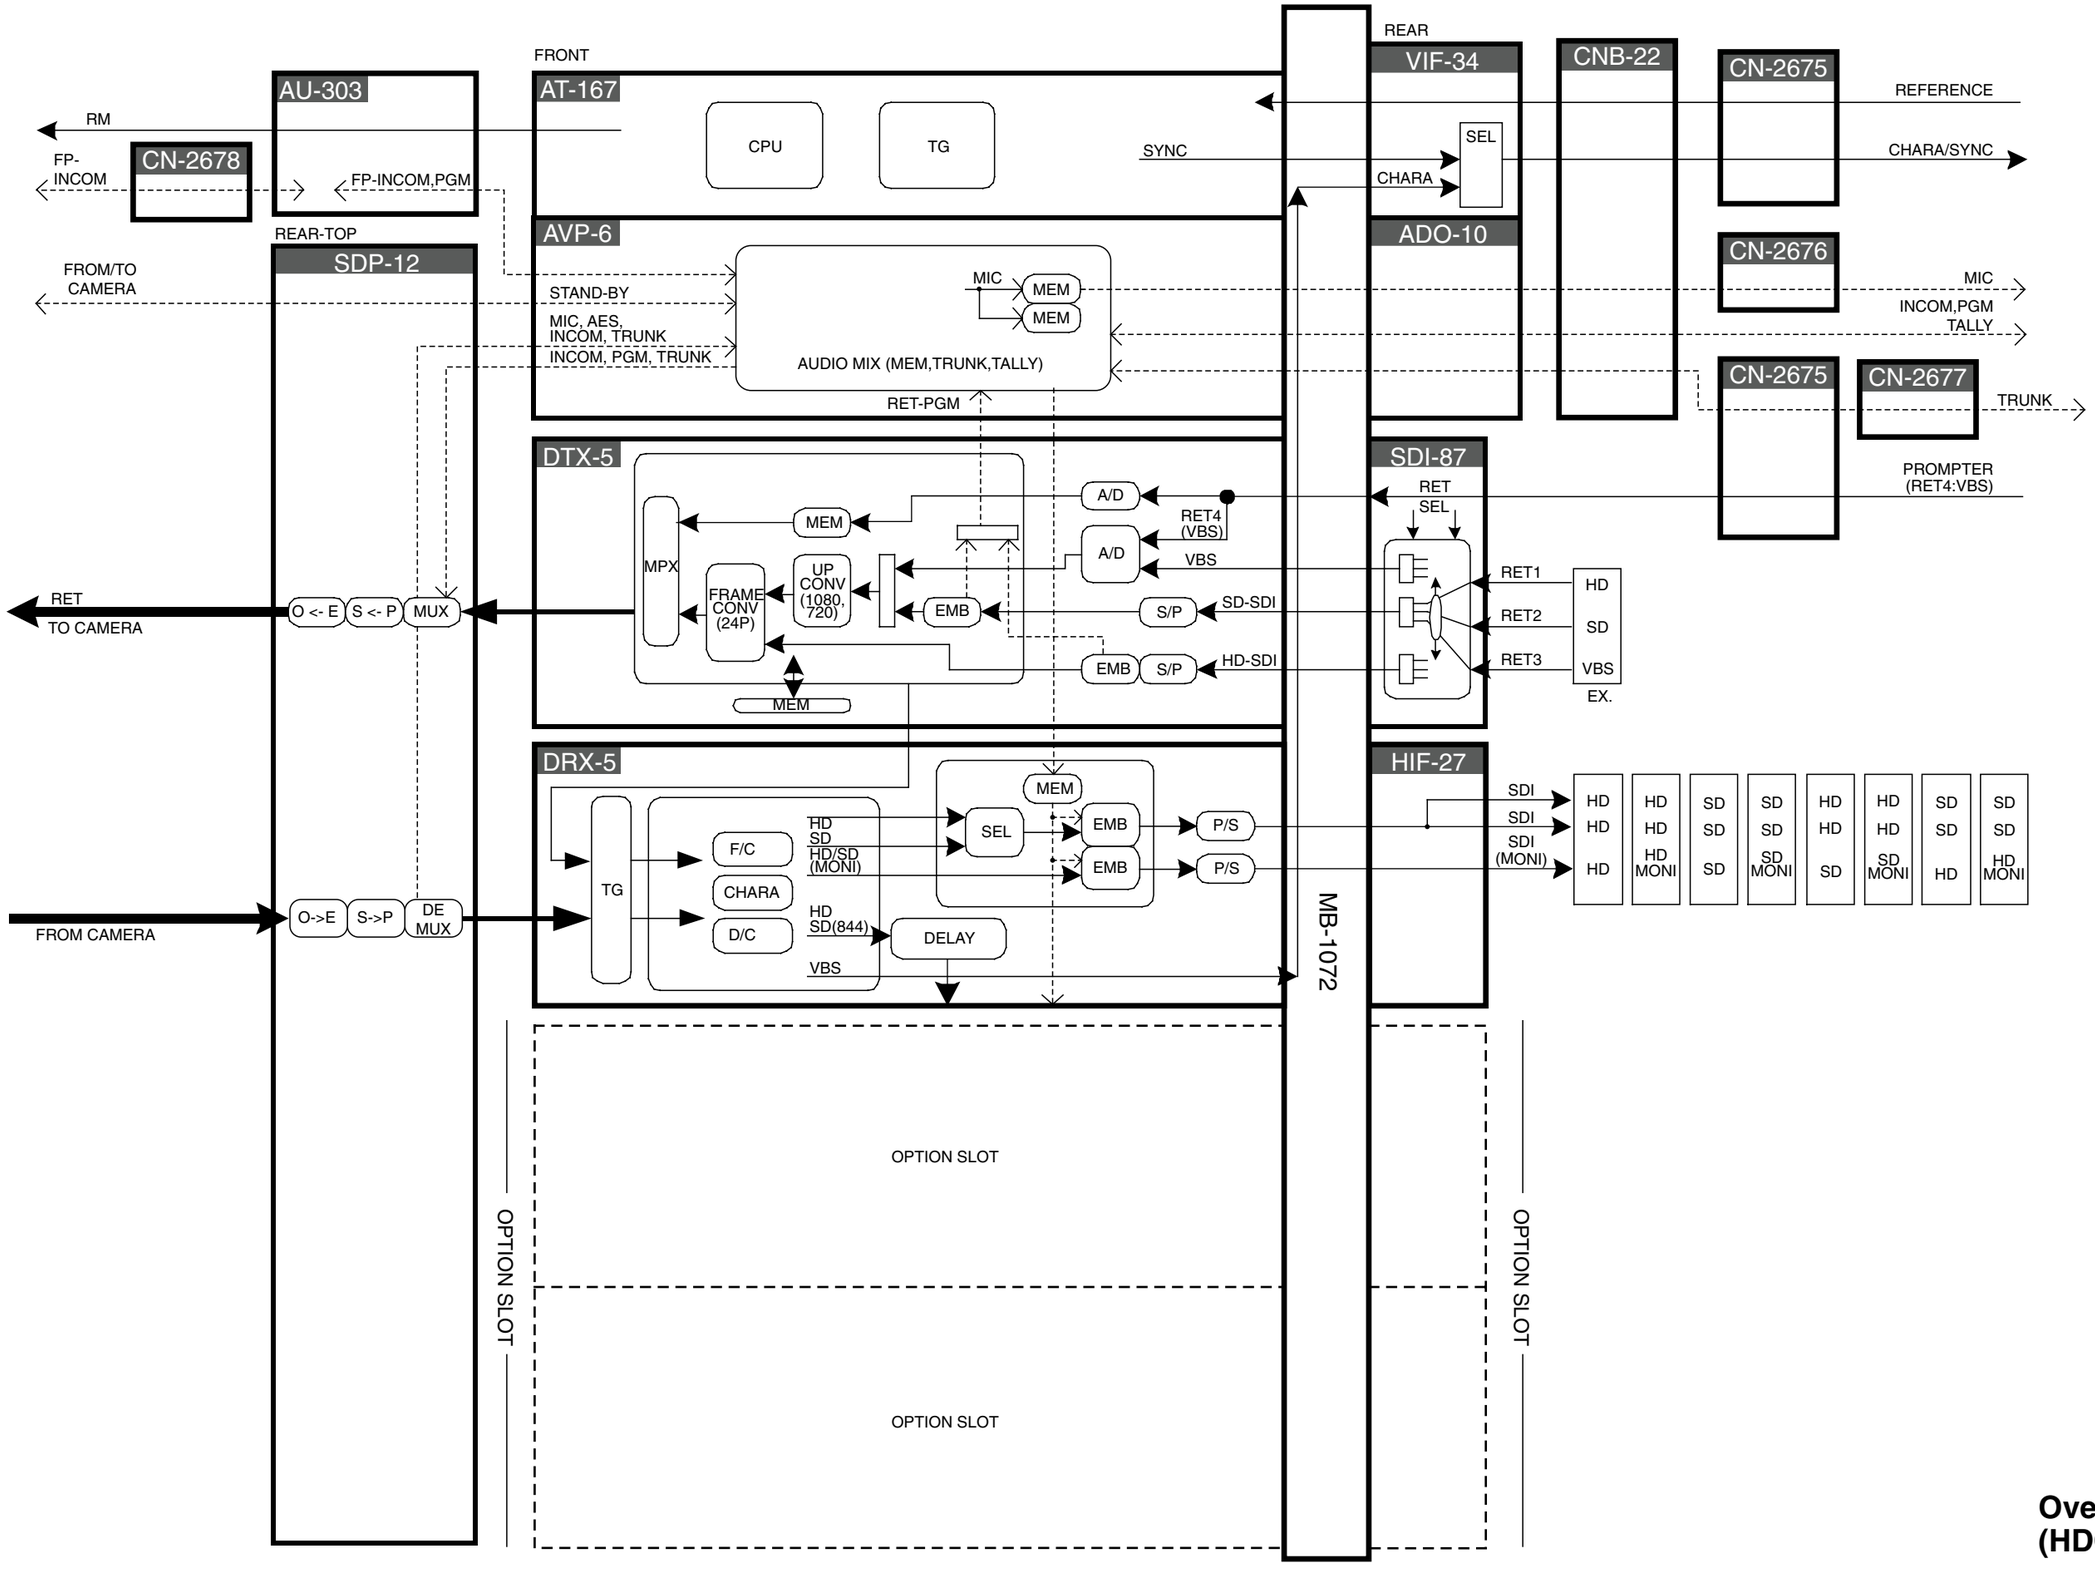

6-6

Overall (HDCU1500)

Overall (Option side) (HDCU1500)

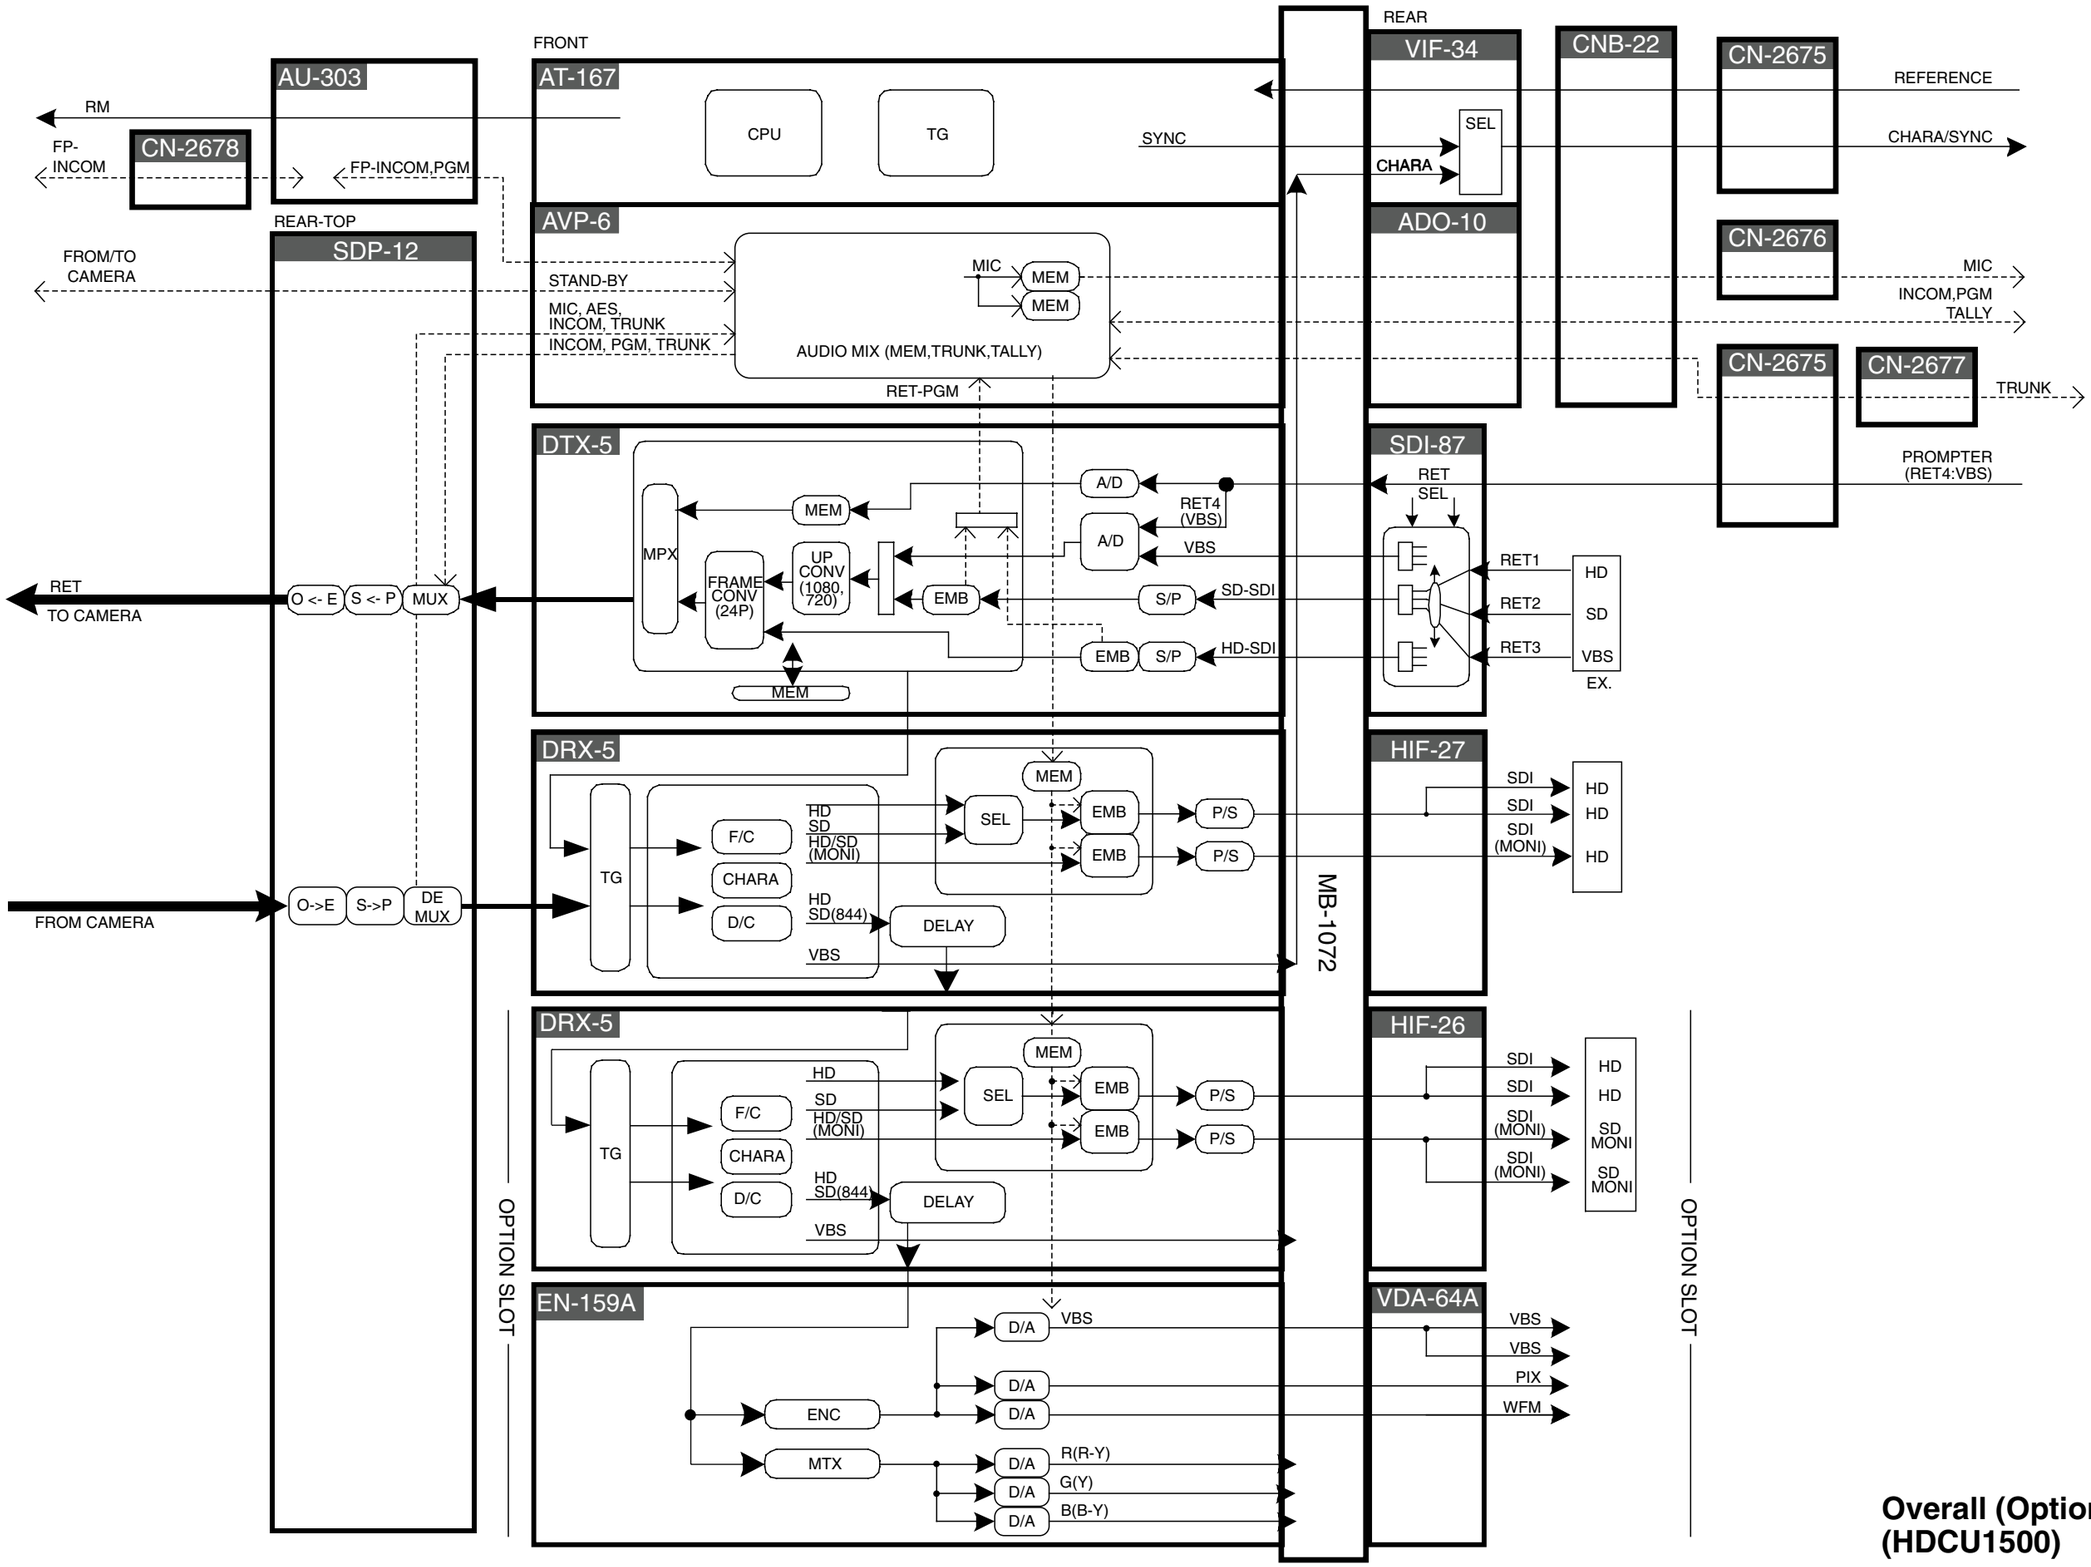

Overall (Option side) (HDCU1500)

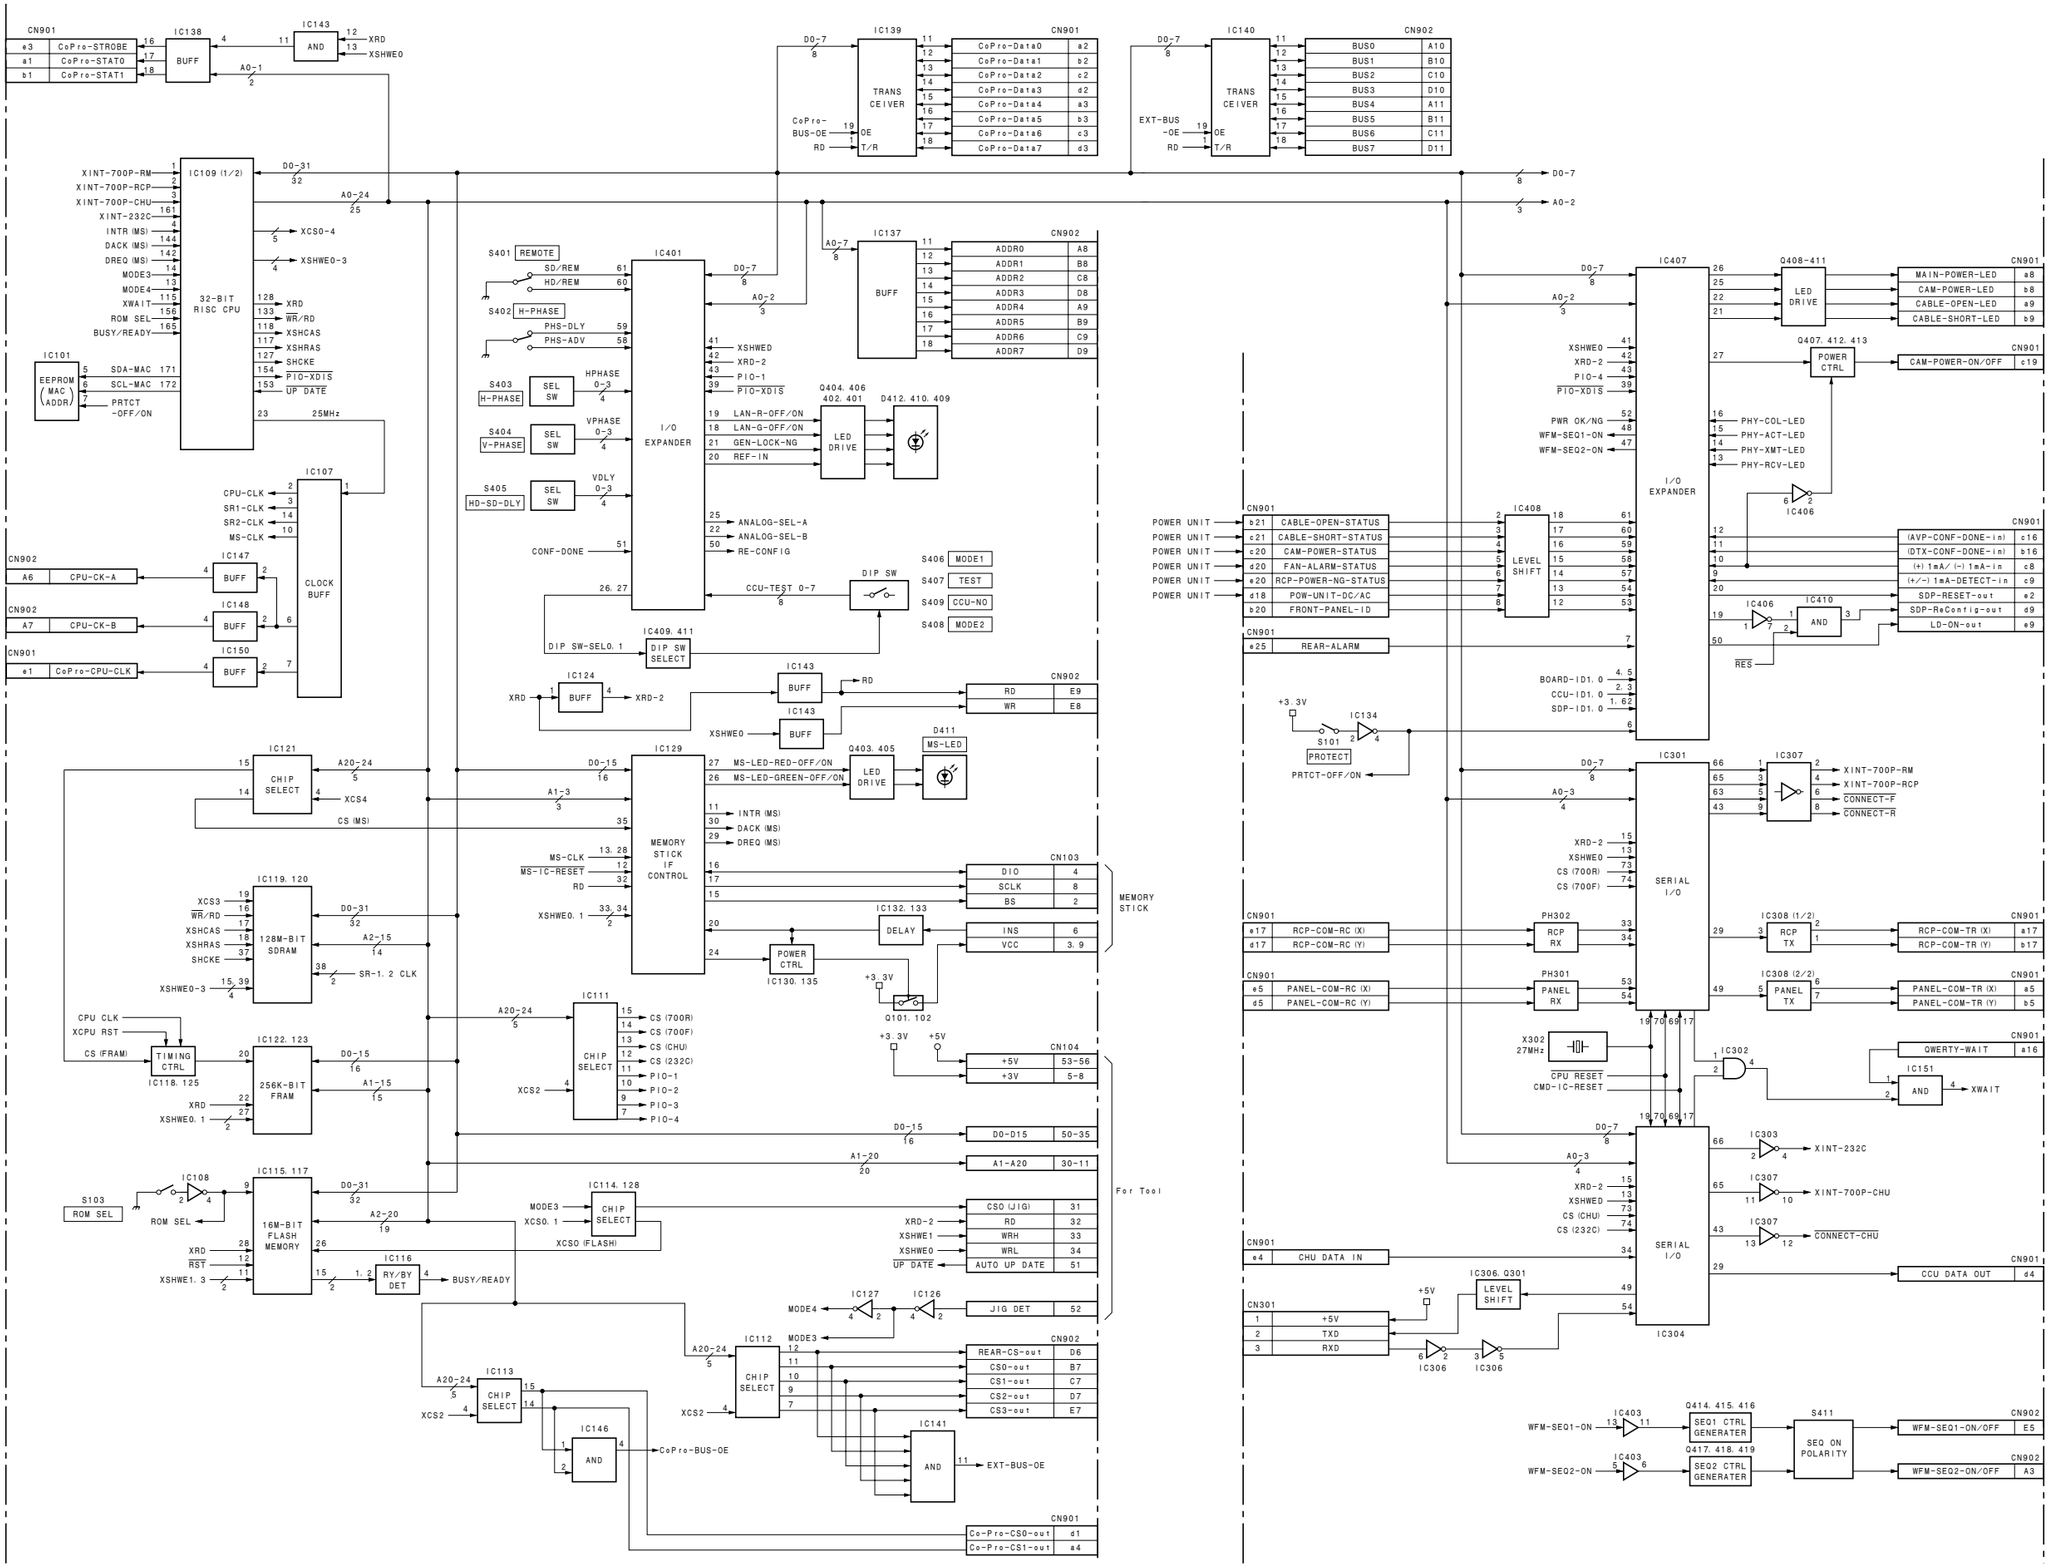

SYSTEM CONTROLLER
AT-167 (1/2)

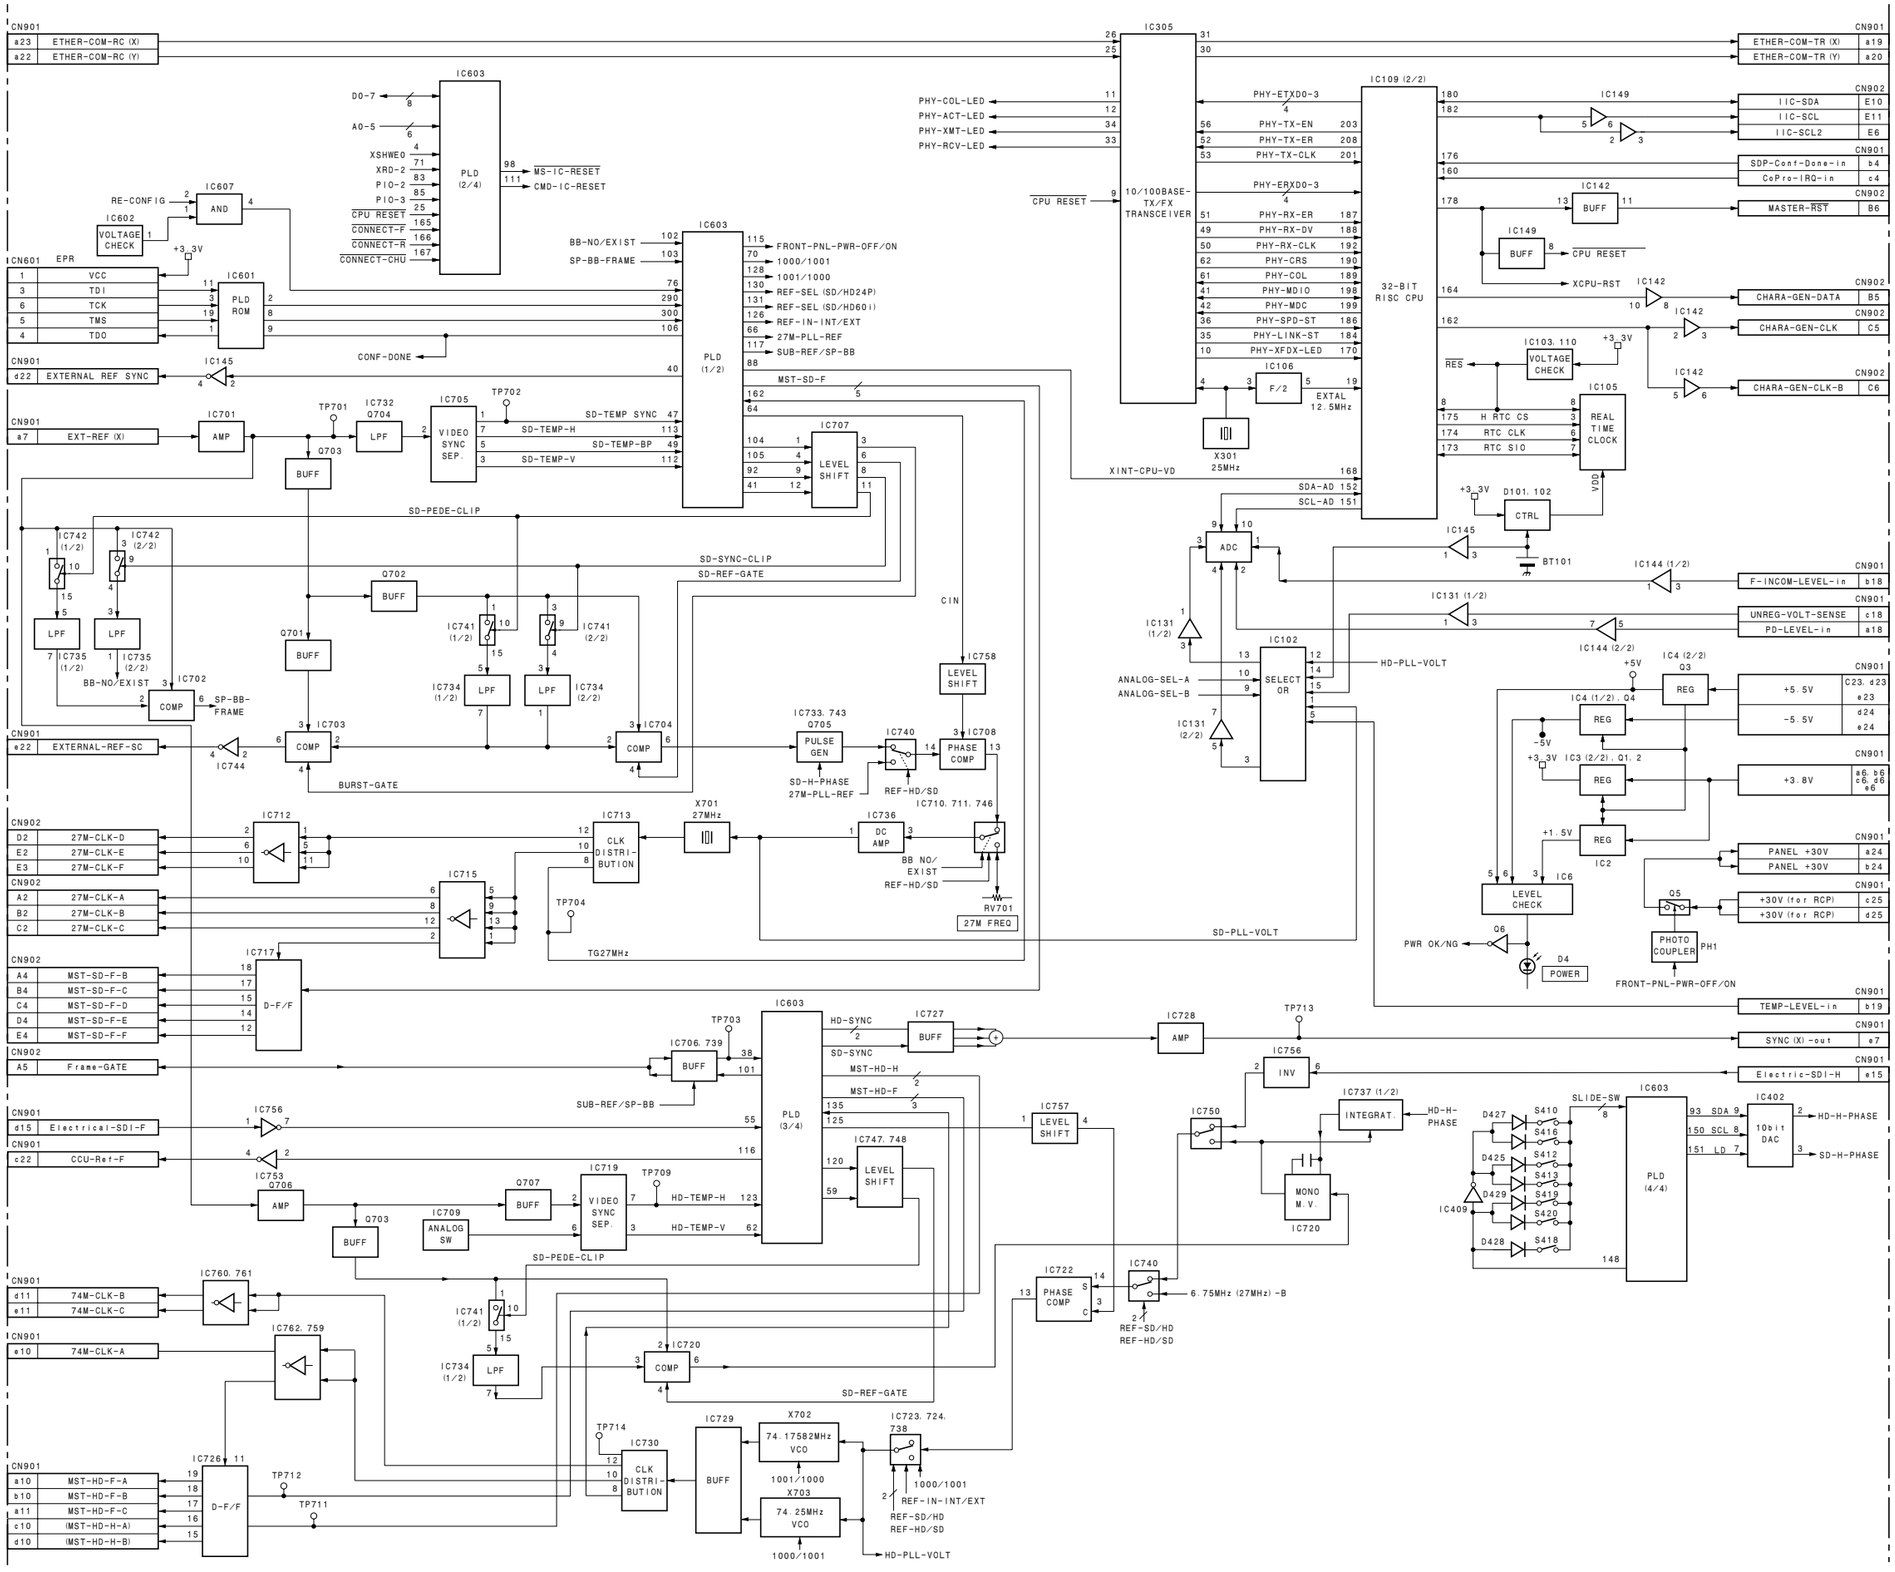

SYSTEM CONTROLLER
AT-167 (2/2)

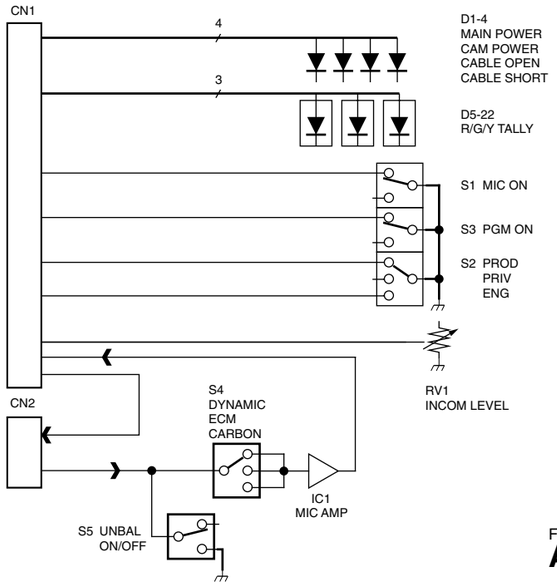

FRONT INTERCOM INTERFACE
AU-302

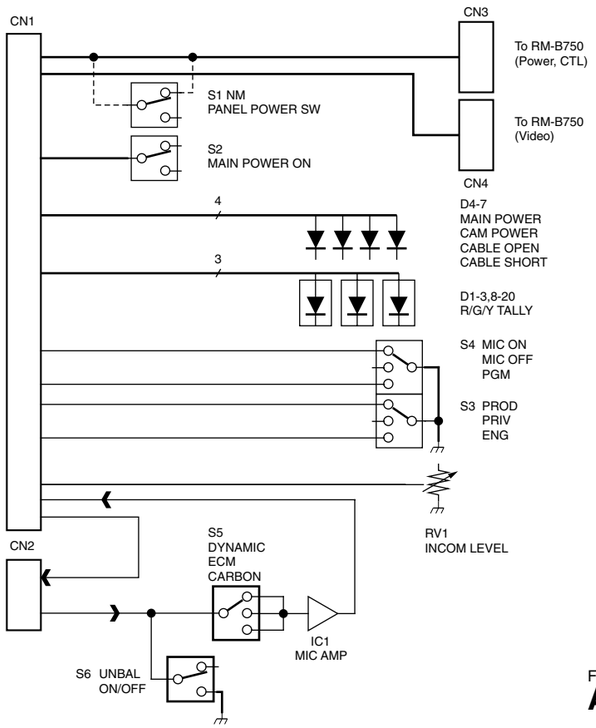

FRONT INTERCOM INTERFACE
AU-303

RED-TALLY-PANEL-OUT
RED-TALLY-REAR-OUT
TALLY-REAR-OUT
GREEN-TALLY-PANEL-OUT
GREEN-TALLY-REAR-OUT
Q715 DRIVER
Q703 DRIVER
Q704 DRIVER
Q714 DRIVER
Q704 DRIVER
CMD-R-TALLY
CMD-G-TALLY

TO SDP BOARD
TDIo/TDO:/TMSo/TDO:
SDP-OE
EPR CN
IC318 SELECTOR
IC310 EPC2-ROM

IC302
AUDIO PROCESSOR
SELECTOR
MIXING
LEVEL CONTROLLER
TRUNK ENC/DEC

TRUNK1-X IN
TRUNK1-Y IN
TRUNK1-X OUT
TRUNK1-Y OUT
IC109,107 232C/422A TX/RX
TRUNK2-X IN
TRUNK2-Y IN
TRUNK2-X OUT
TRUNK2-Y OUT
IC108,107 232C/422A TX/RX

IC301,303,304 X300 PLL 24.576MHz
IC300 AUDIO MEM
LRCK 64FS,256FS
IC309, 312 BUFF

RED-TALLY(X,Y) IN
S11
S12
PH700
R-TALLY
GREEN-TALLY(X,Y) IN
S21
S22
PH700
G-TALLY
Q706,707 DC/DC CONV
T700
IC701 +5REG
IC702 +5REG

+12V
+12.5V
IC100,Q100 +12V REG
-12.5V
IC100,Q101 -12V REG
IC104 +1.5VREG
IC101,Q103 +5VREG
-5.5V
IC101,Q104 -5V REG
+3.8V
IC105,Q102 +3.3VREG

SDI MIC 1/2 OUT
SDI MIC 3/4 OUT
RET-PGM 1/2
RET-PGM 3/4
27M CLK A IN
IC315 BUFF
SDP-RX12-MIC12
SDP-RX34-AES12
SDP-RX56-INC12
SDP-RX78-TRK12
IC314 BUFF
SDP-TX12-PGM12
SDP-TX34-SPA12
SDP-TX56-INC12
SDP-TX78-TRK12
LRCK,64FS
IC313 BUFF
LRCK,64FS
IC308 BUFF

CPU ADRS BUS 8
CPU DATA BUS 8
CPU CONTROL BUS 4
IC200 IC201 IC202
IC203 ADRS DEC
CS
CS
IC206 PIO
D104
S1
AD/DA RST
PANEL-PGM-ON,MIC-CTL-ON,PRIV/ENG,PRIV/PROD 4

AES1/2
IC319 MUTE
IC311 DRIVER
AES/EBU-X_OUT

MIC1/2
IC501 D/A
AD/DA RST
LRCK
64FS,256FS
IC507 LPF
IC508 LPF
RV500 LEVEL
RV501 LEVEL
IC505 0/-20DB AMP
IC506 0/-20DB AMP
S500
S501
MIC1 (X,Y) OUT
MIC2 (X,Y) OUT

PGM1/2
IC500 A/D
AD/DA RST
LRCK
64FS,256FS
IC502 LPF
IC502 LPF
IC503 LIMIT
IC504 LIMIT
S502 0/-20DB
S503 0/-20DB
PGM1 (X,Y) IN
PGM2 (X,Y) IN

IC601 LPF
IC601 LIMIT
IC603 INV
IC605 MUTE
IC603 ATT
PROD (X,Y) IN
S600 RTS/CC
IC609 GAIN CONT
IC605 MUTE
IC609 CANCEL
S602 RTS (CC) / 4W
PROD ENG
IC613 LPF
IC608 AMP
IC607 AMP
(4W)
PROD (X) OUT
PROD (Y) OUT
PROD ENG
IC600 A/D D/A
IC602 LPF
IC602 LIMIT
IC604 INV
IC606 MUTE
IC604 ATT
ENG (X,Y) IN
S601 RTS/CC
IC610 GAIN CONT
IC606 MUTE
IC610 CANCEL
S603 RTS (CC) / 4W
IC614 LPF
IC611 AMP
IC612 AMP
(4W)
ENG (X) OUT
ENG (Y) OUT
AD/DA RST
LRCK
64FS,256FS

FP-INCOM
IC405 LPF
IC405 LIMIT
PANEL INCOM T (X) IN
FP-INCOM ,PGM
IC401 A/D D/A
IC409 LPF
IC410 LPF
IC407 AMP
IC407 AMP
PANEL INCOM R (X) OUT
PANEL PGM (X) OUT
AD/DA RST
LRCK
64FS,256FS
IC404 MUTE CONT
CAM-SHORT-STATUS
CABLE-OPEN-STATUS

STB-INCOM
IC403 LPF
IC403 LIMIT
IC404 MUTE
IC406 LPF
STBY-INOCM RX
STB-INCOM
IC402 A/D D/A
IC404 MUTE
IC406 LIMIT
STBY-INCOM TX
AD/DA RST
LRCK
64FS,256FS

AUDIO, TALLY
AVP-6

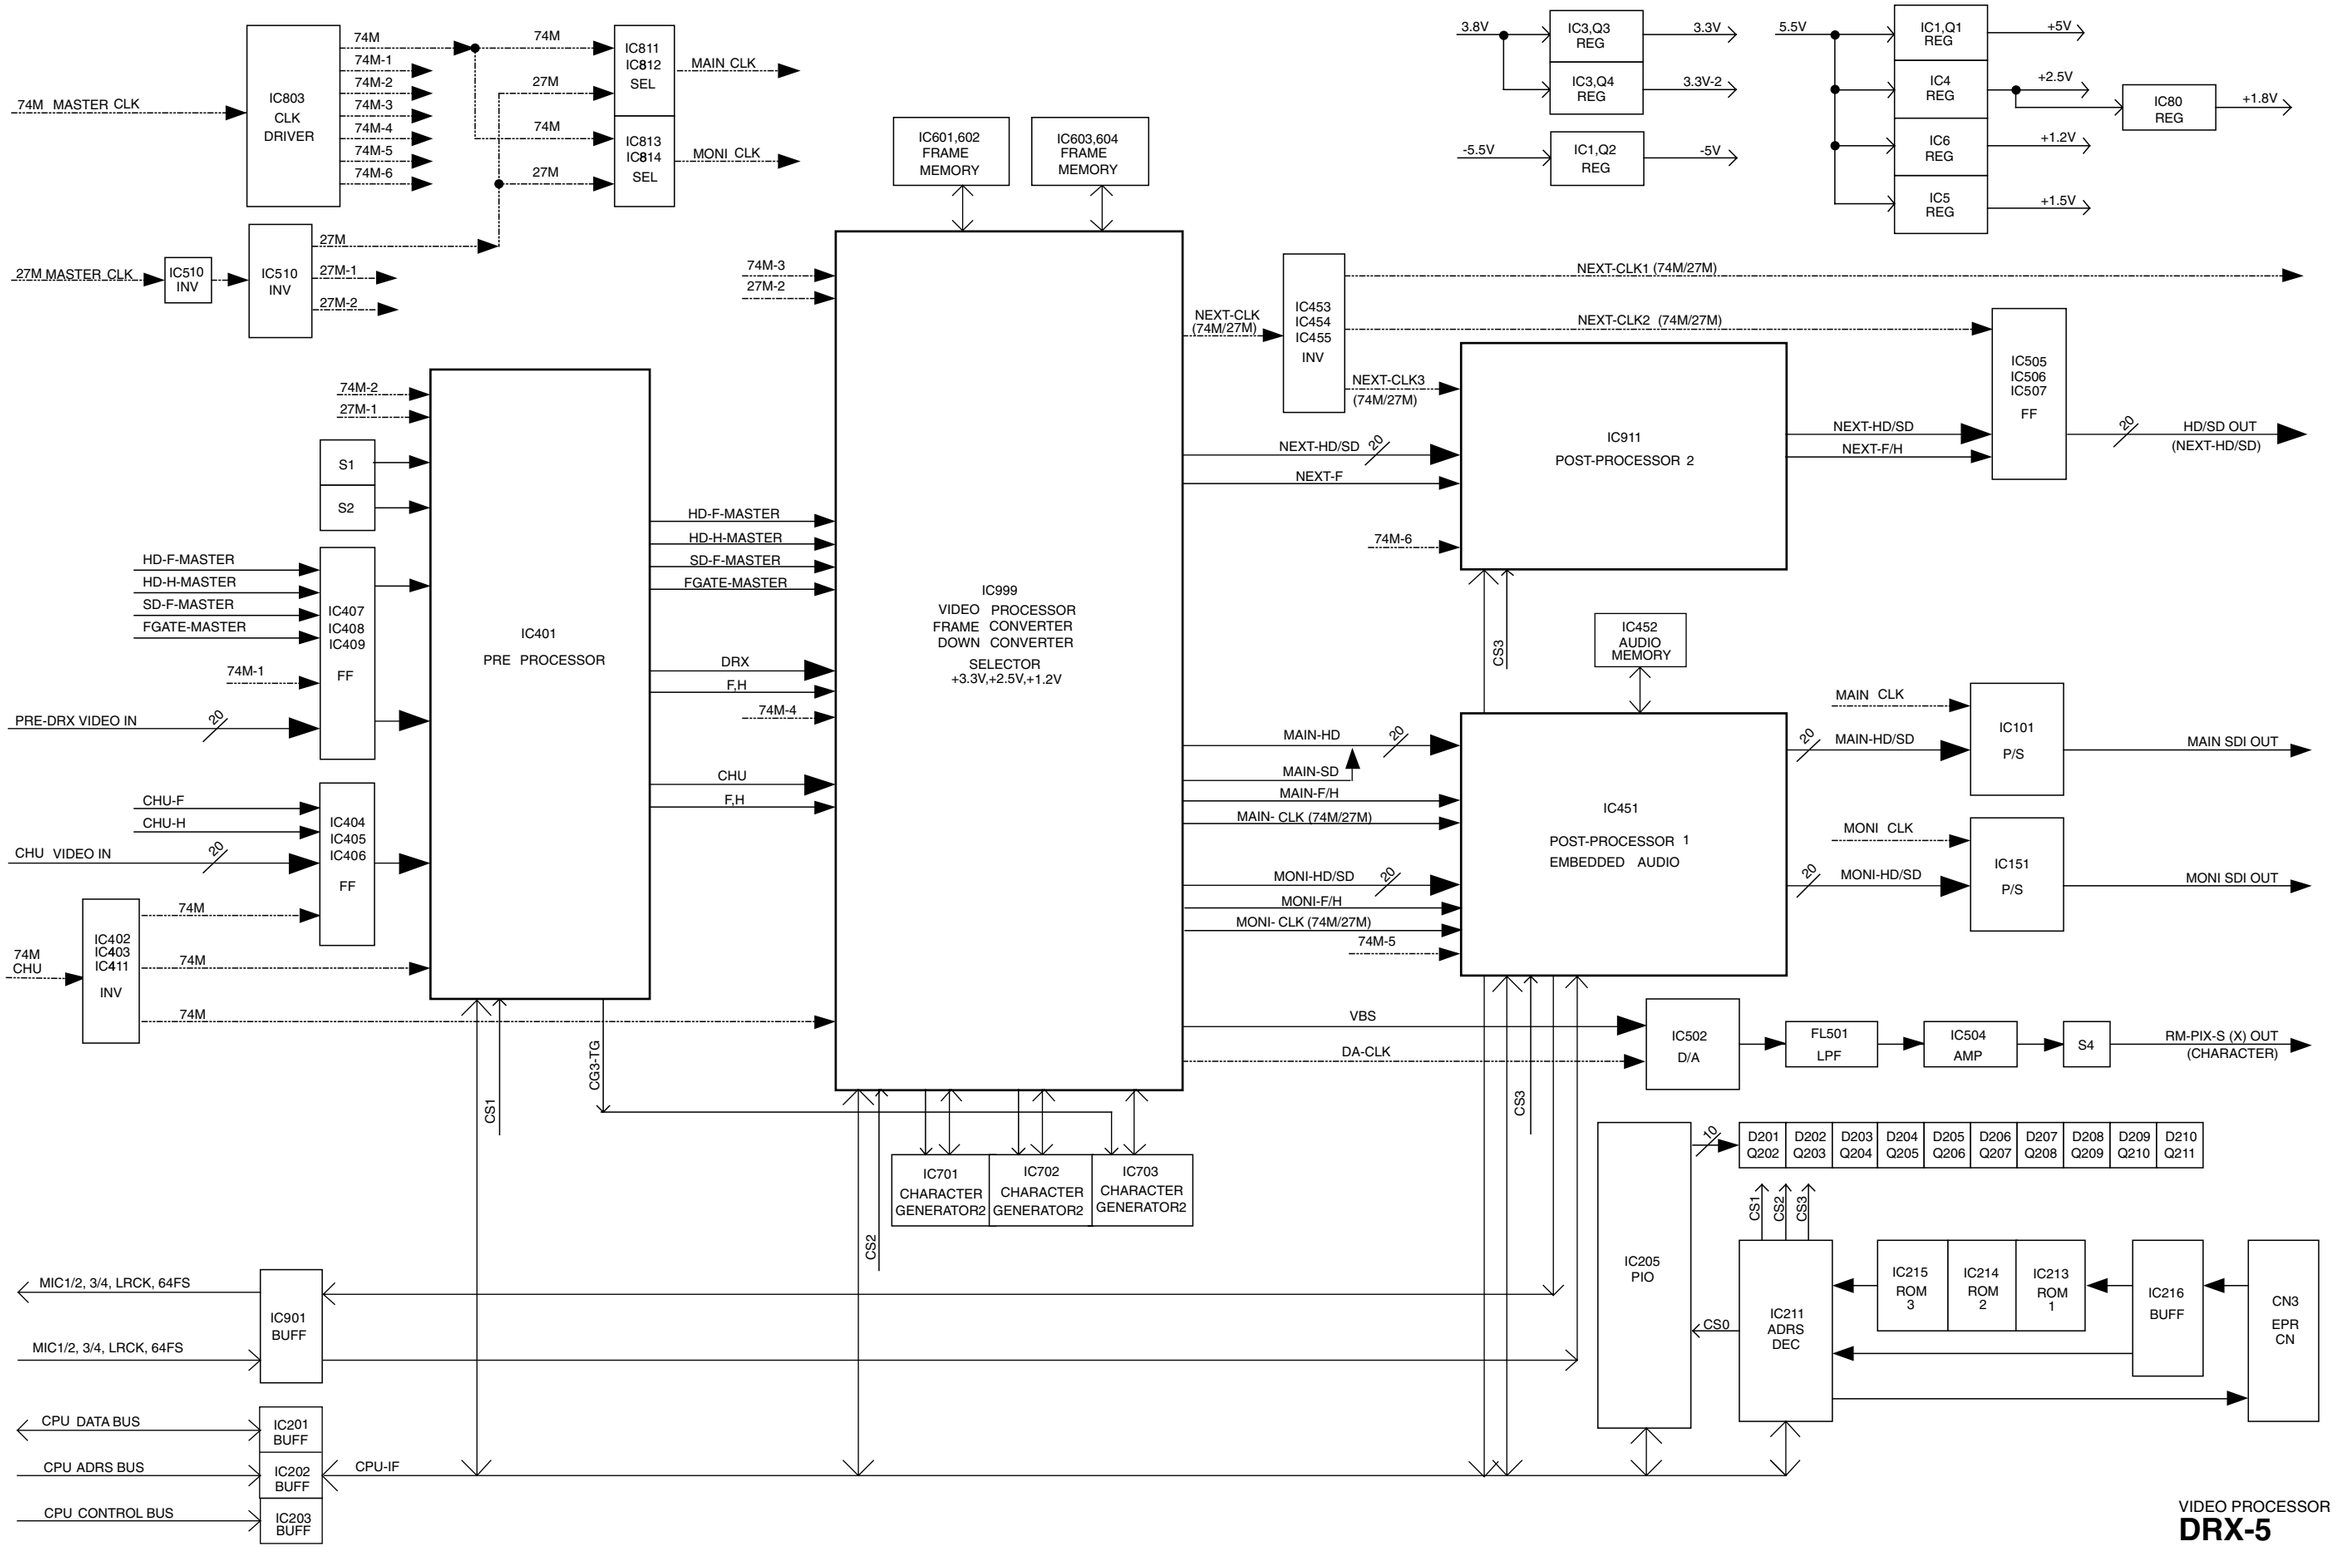

VIDEO PROCESSOR
DRX-5

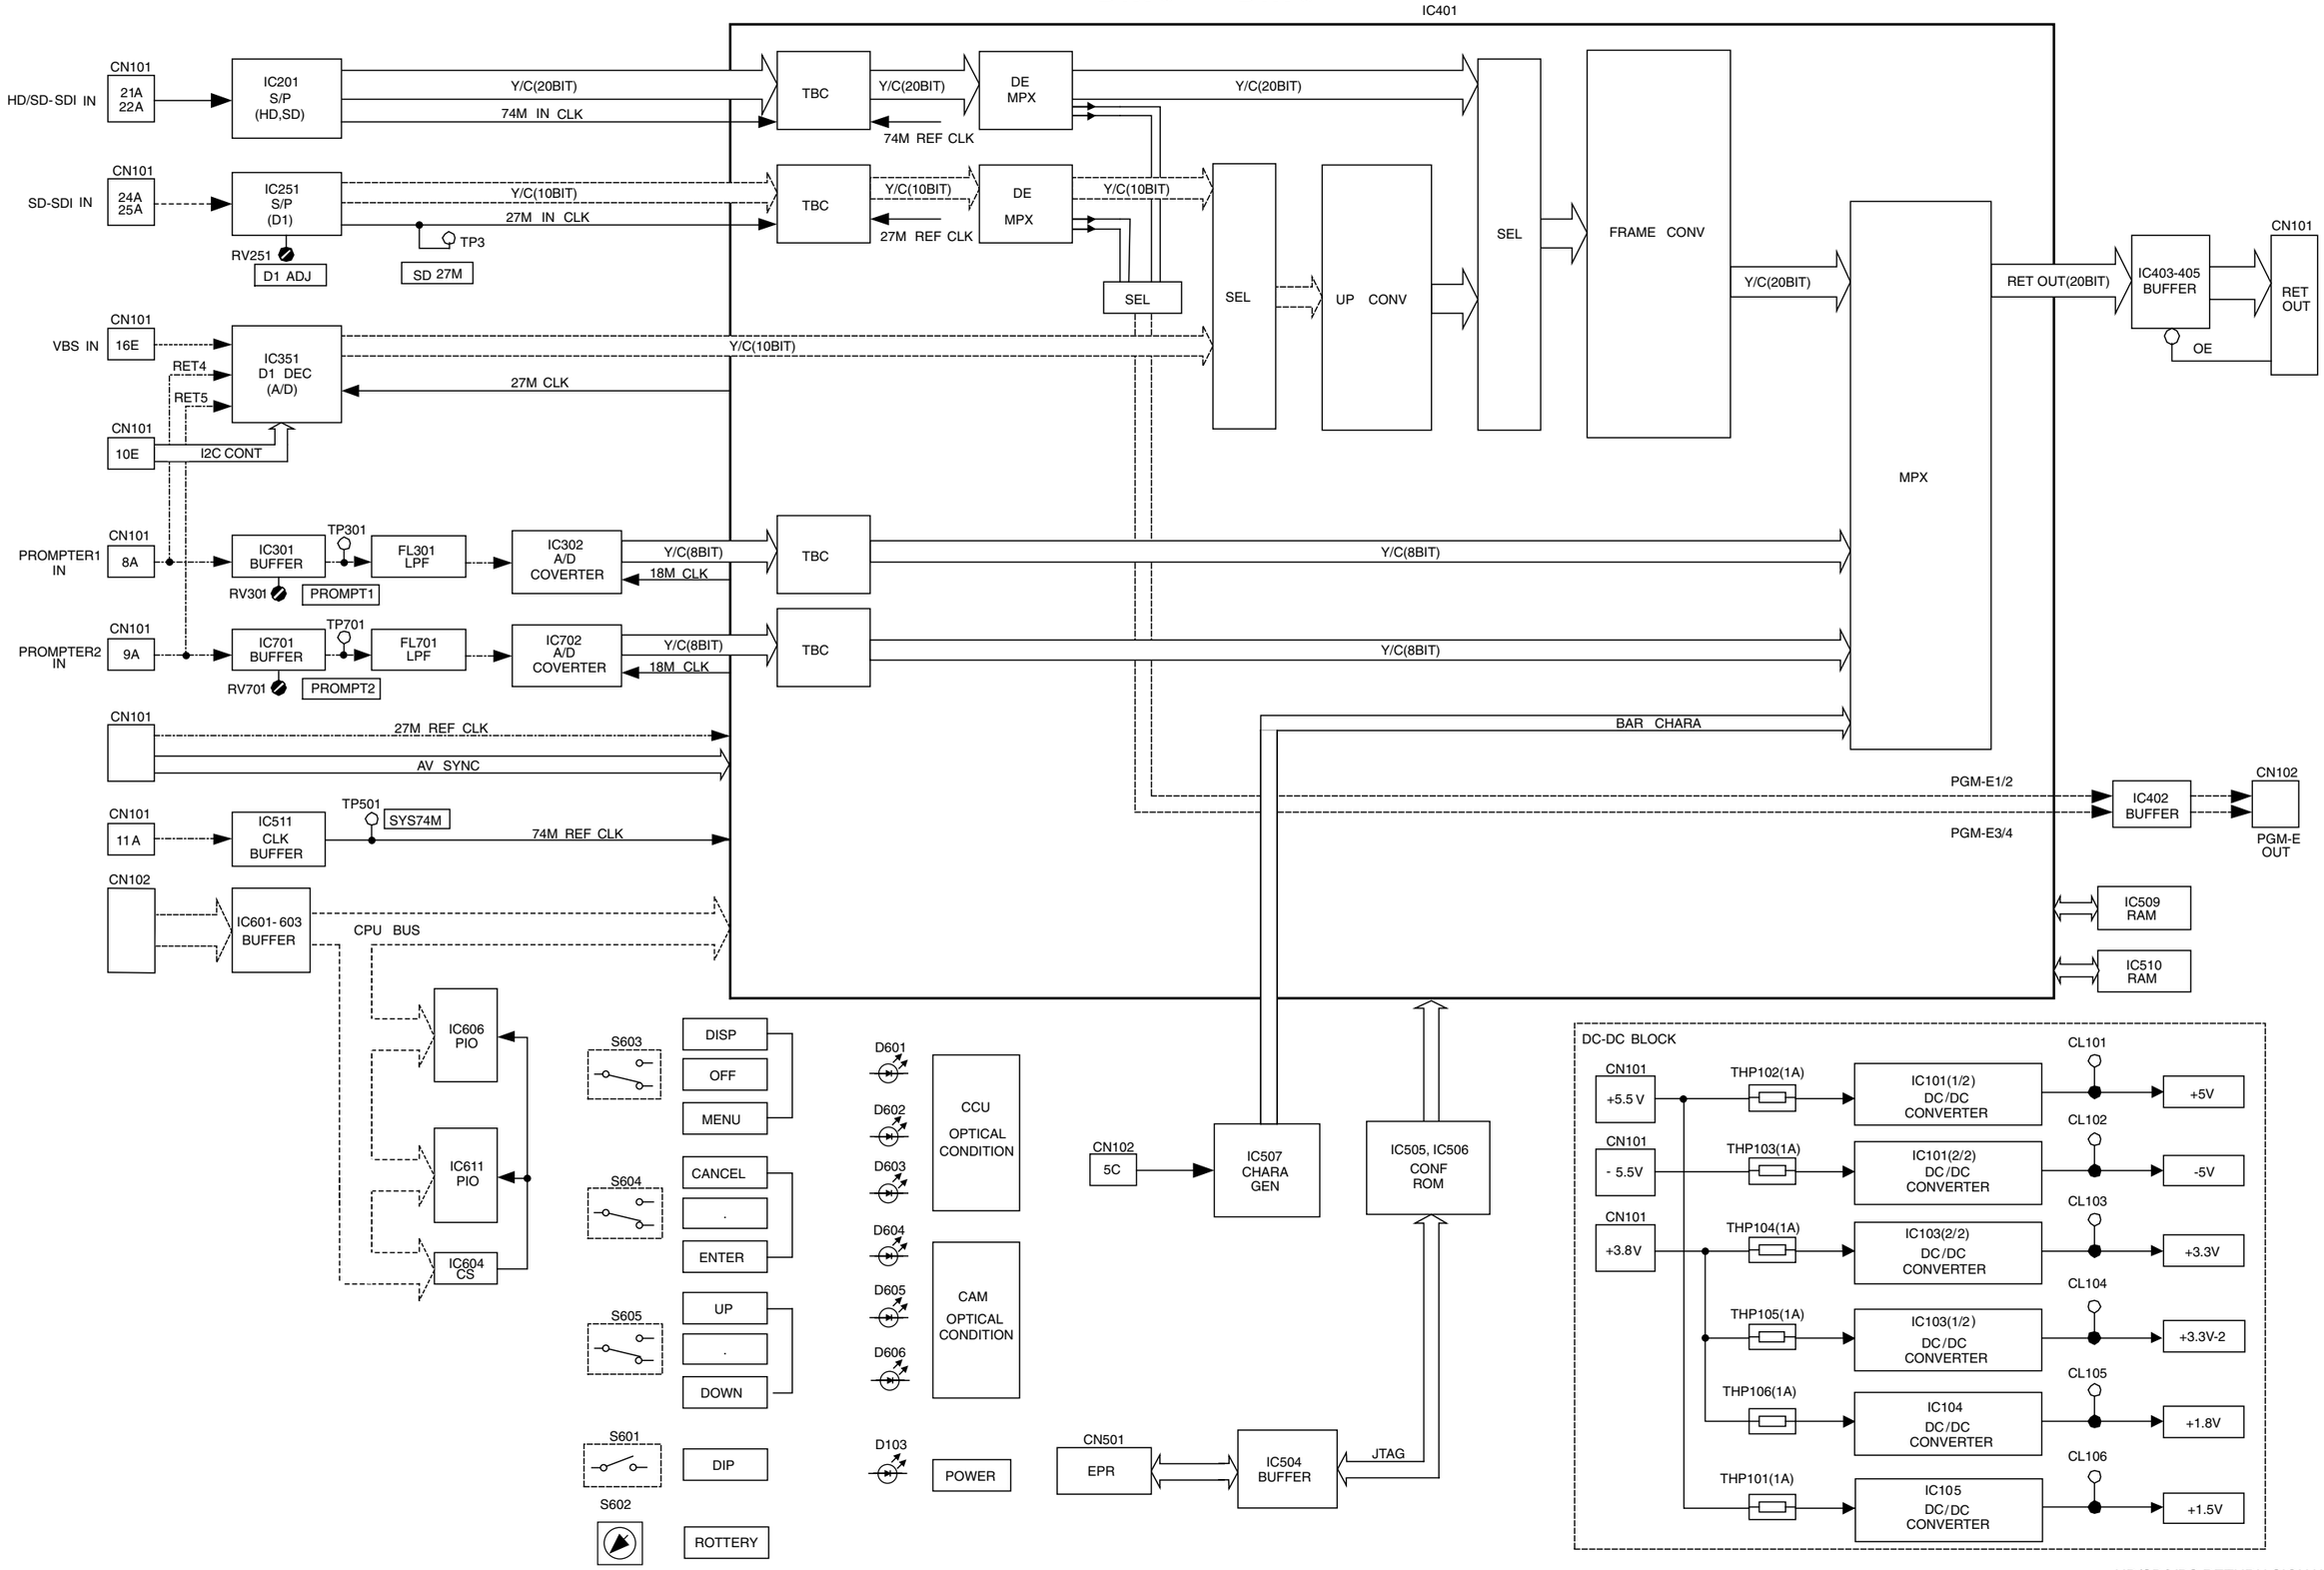

HD/SD/VBS RETURN SIGNAL CONVERTER

DTX-5

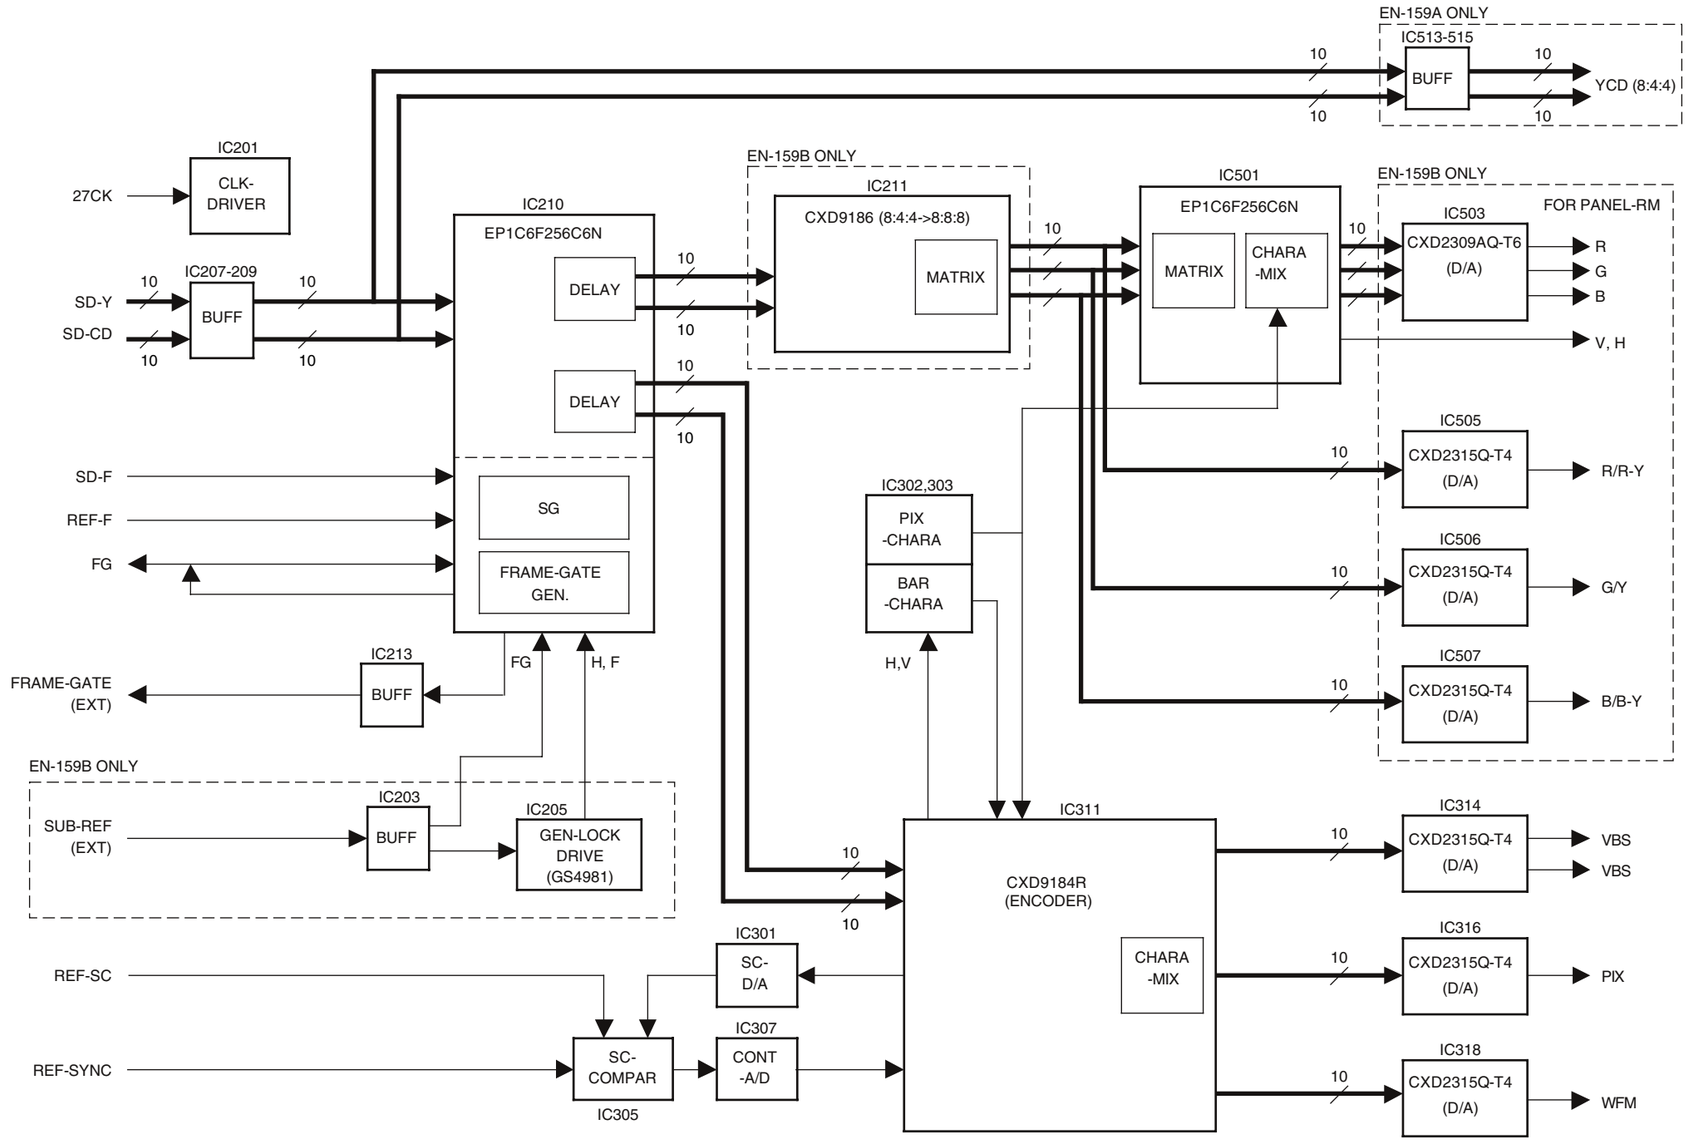

SD ENCODER UNIT
EN-159A

SD ENCODER & COMPONENT VIDEO UNIT
EN-159B

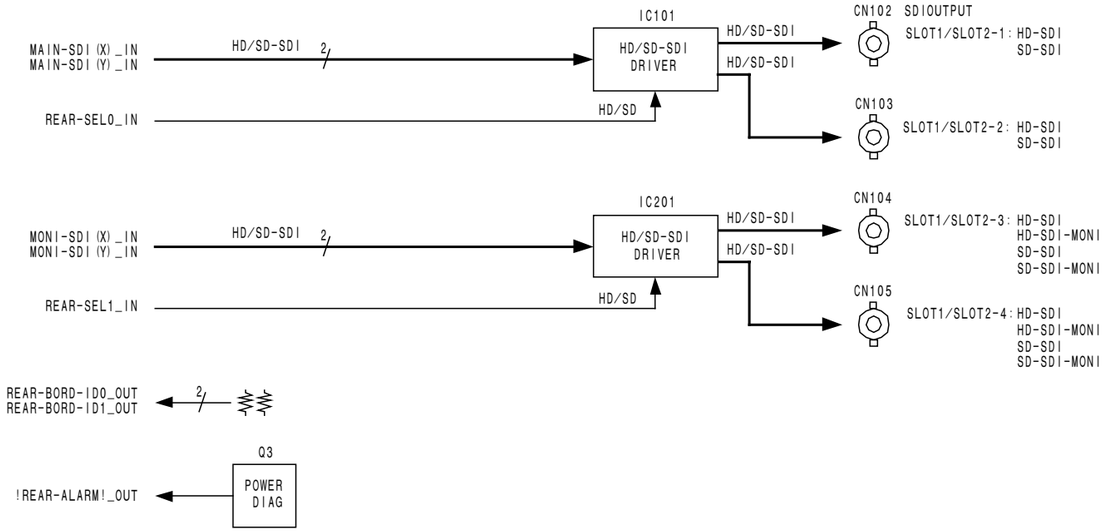

SDI OUTPUT
HIF-25

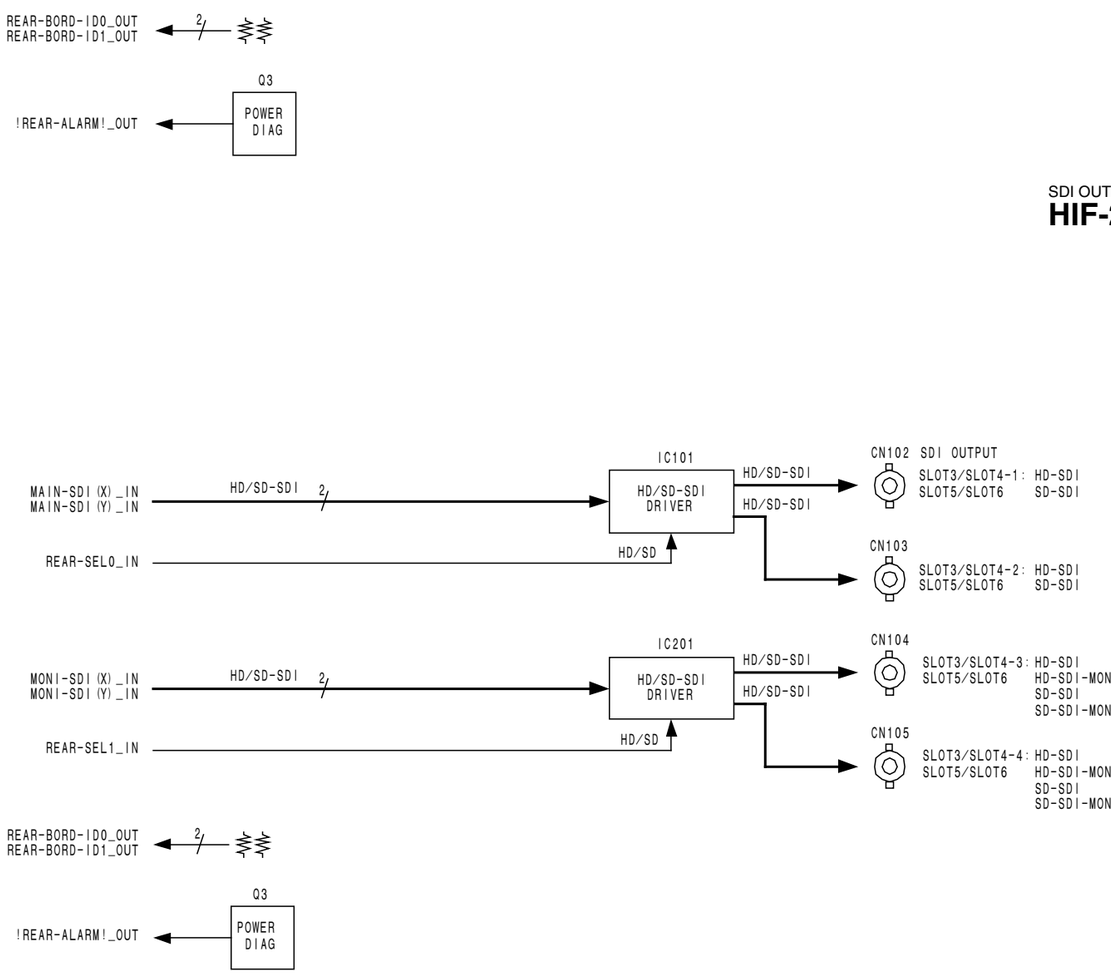

SDI OUTPUT
HIF-26

HIF-25, HIF-26, HIF-27, SDI-85

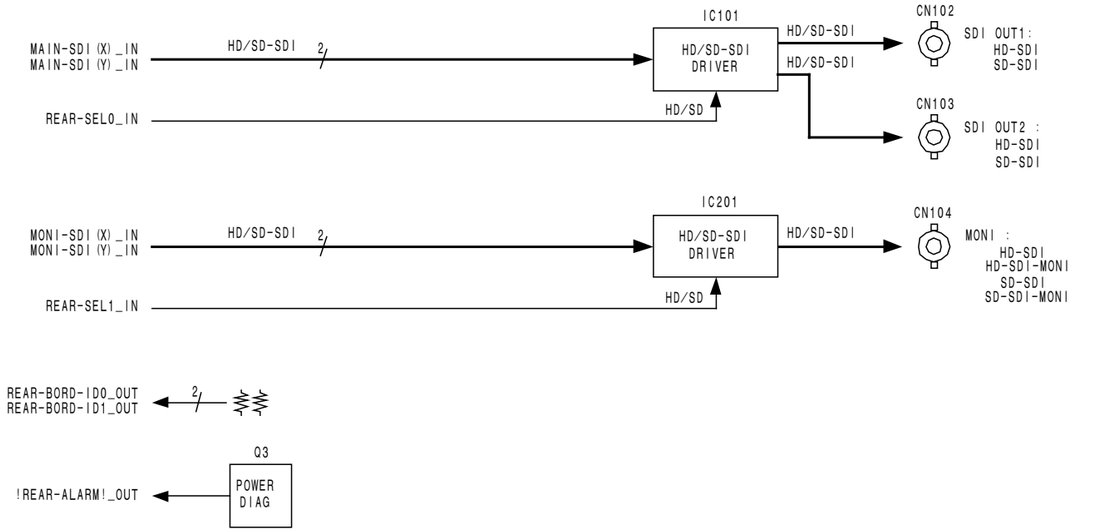

SDI OUTPUT
HIF-27

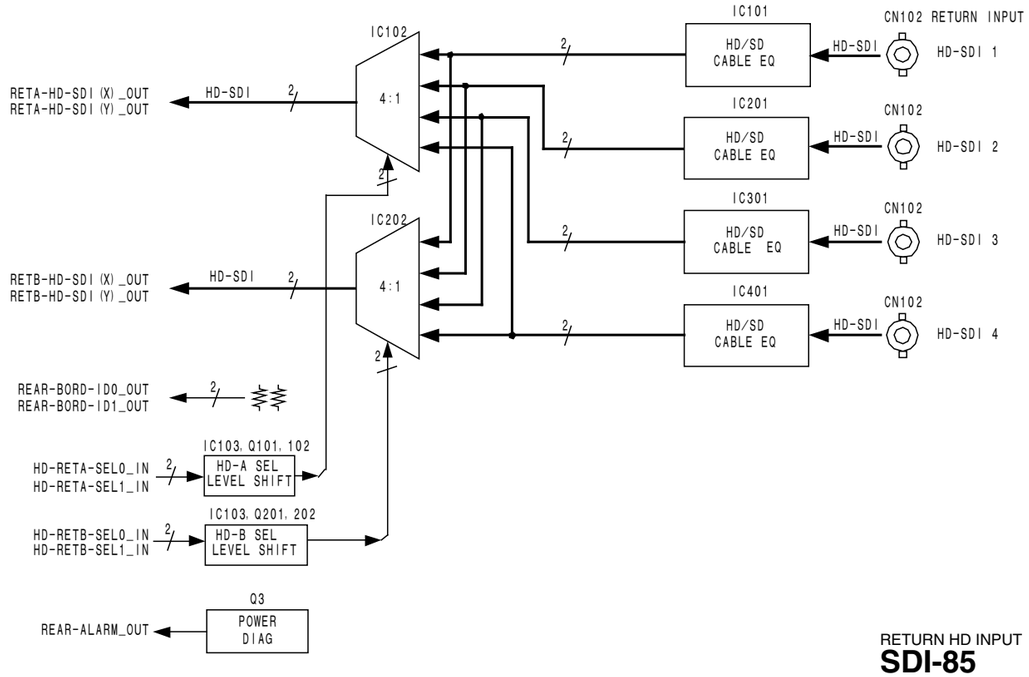

RETURN HD INPUT
SDI-85

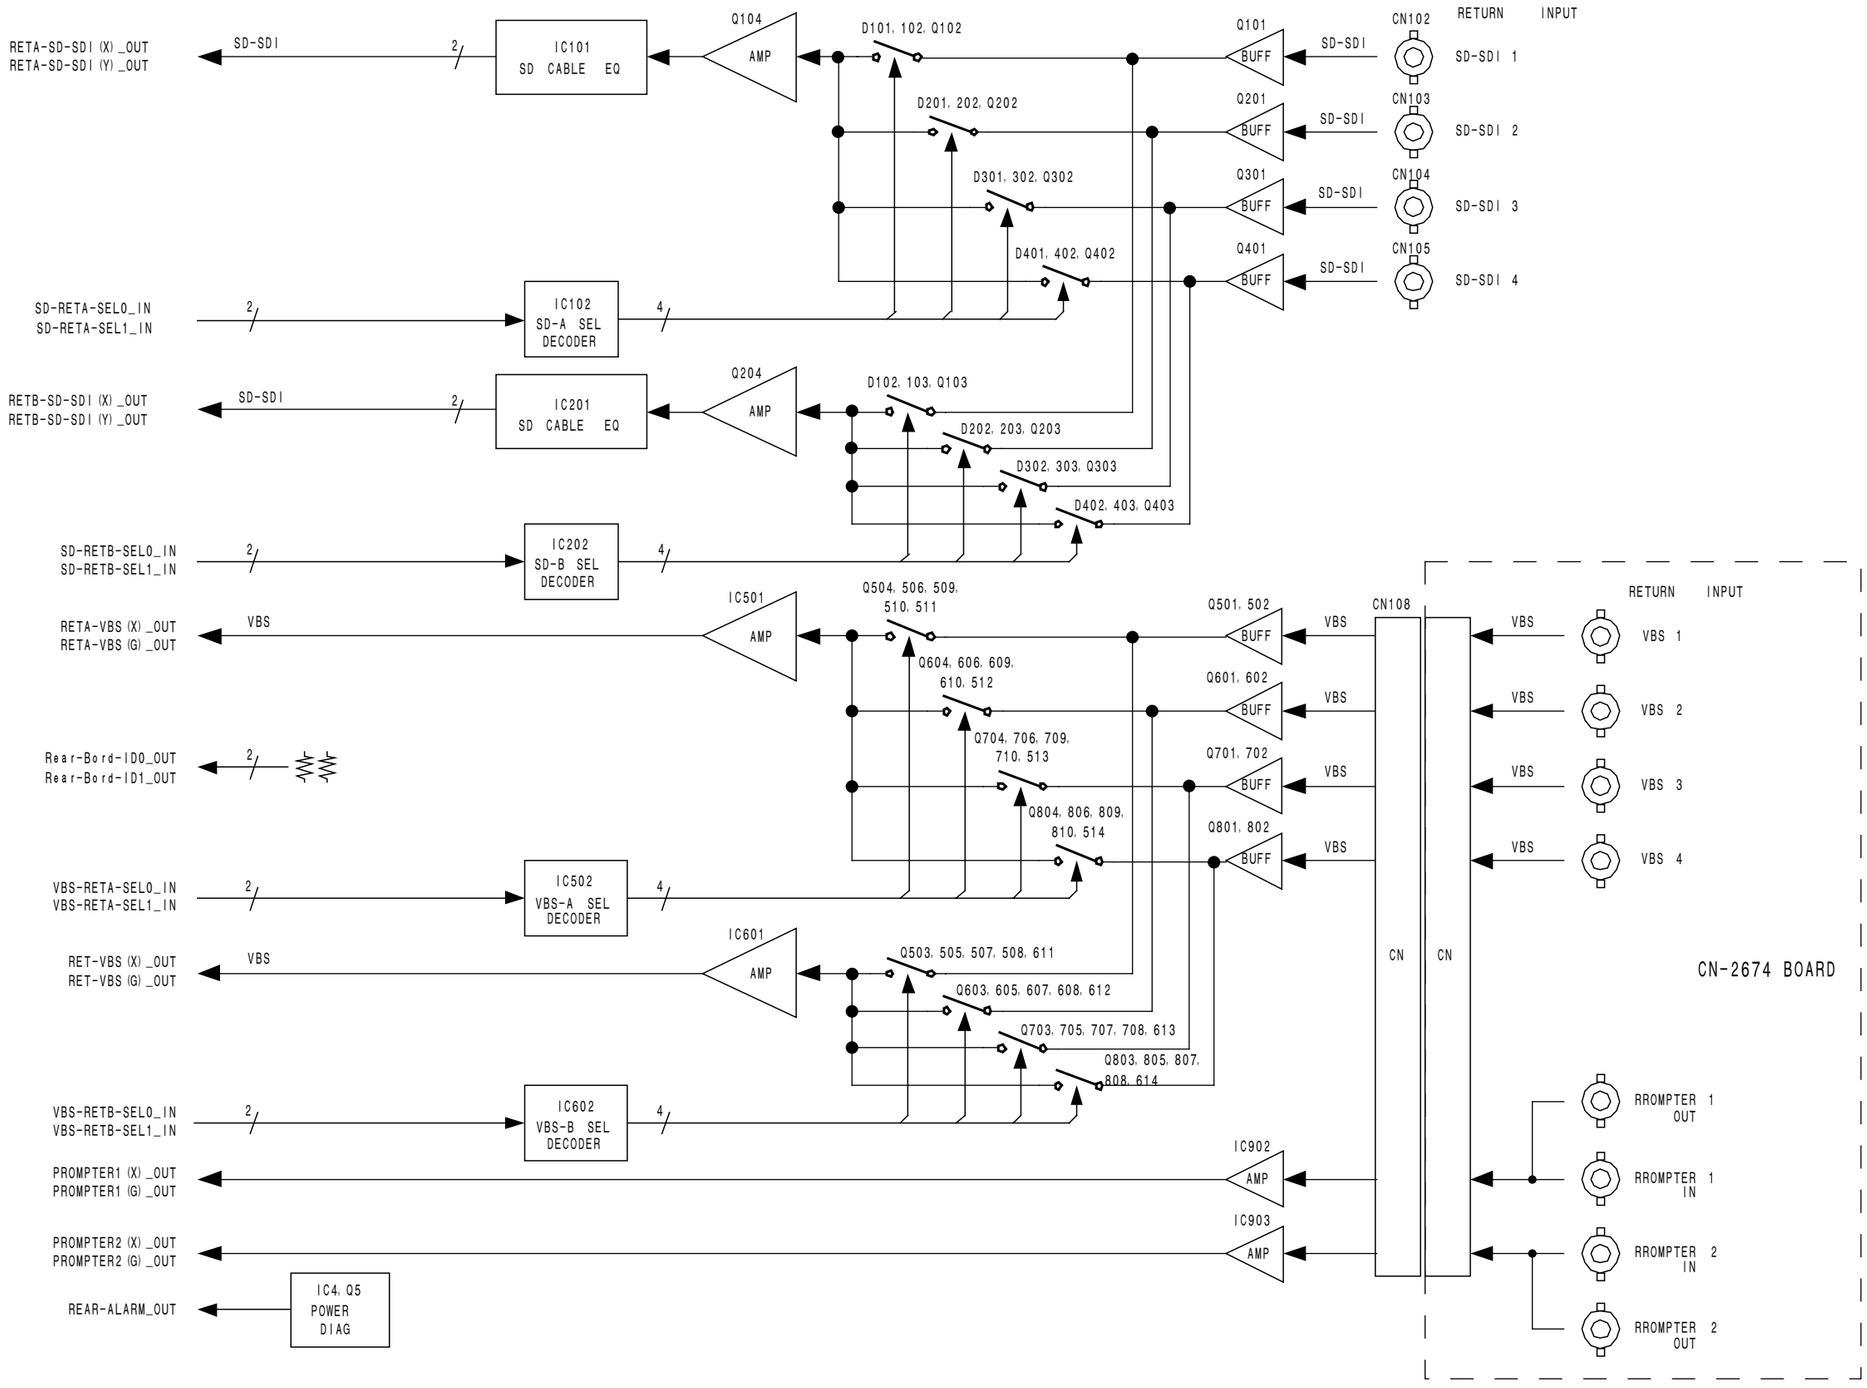

CONNECTOR (VBS PROMPTER)
CN-2674

RETURN SD INPUT
SDI-86

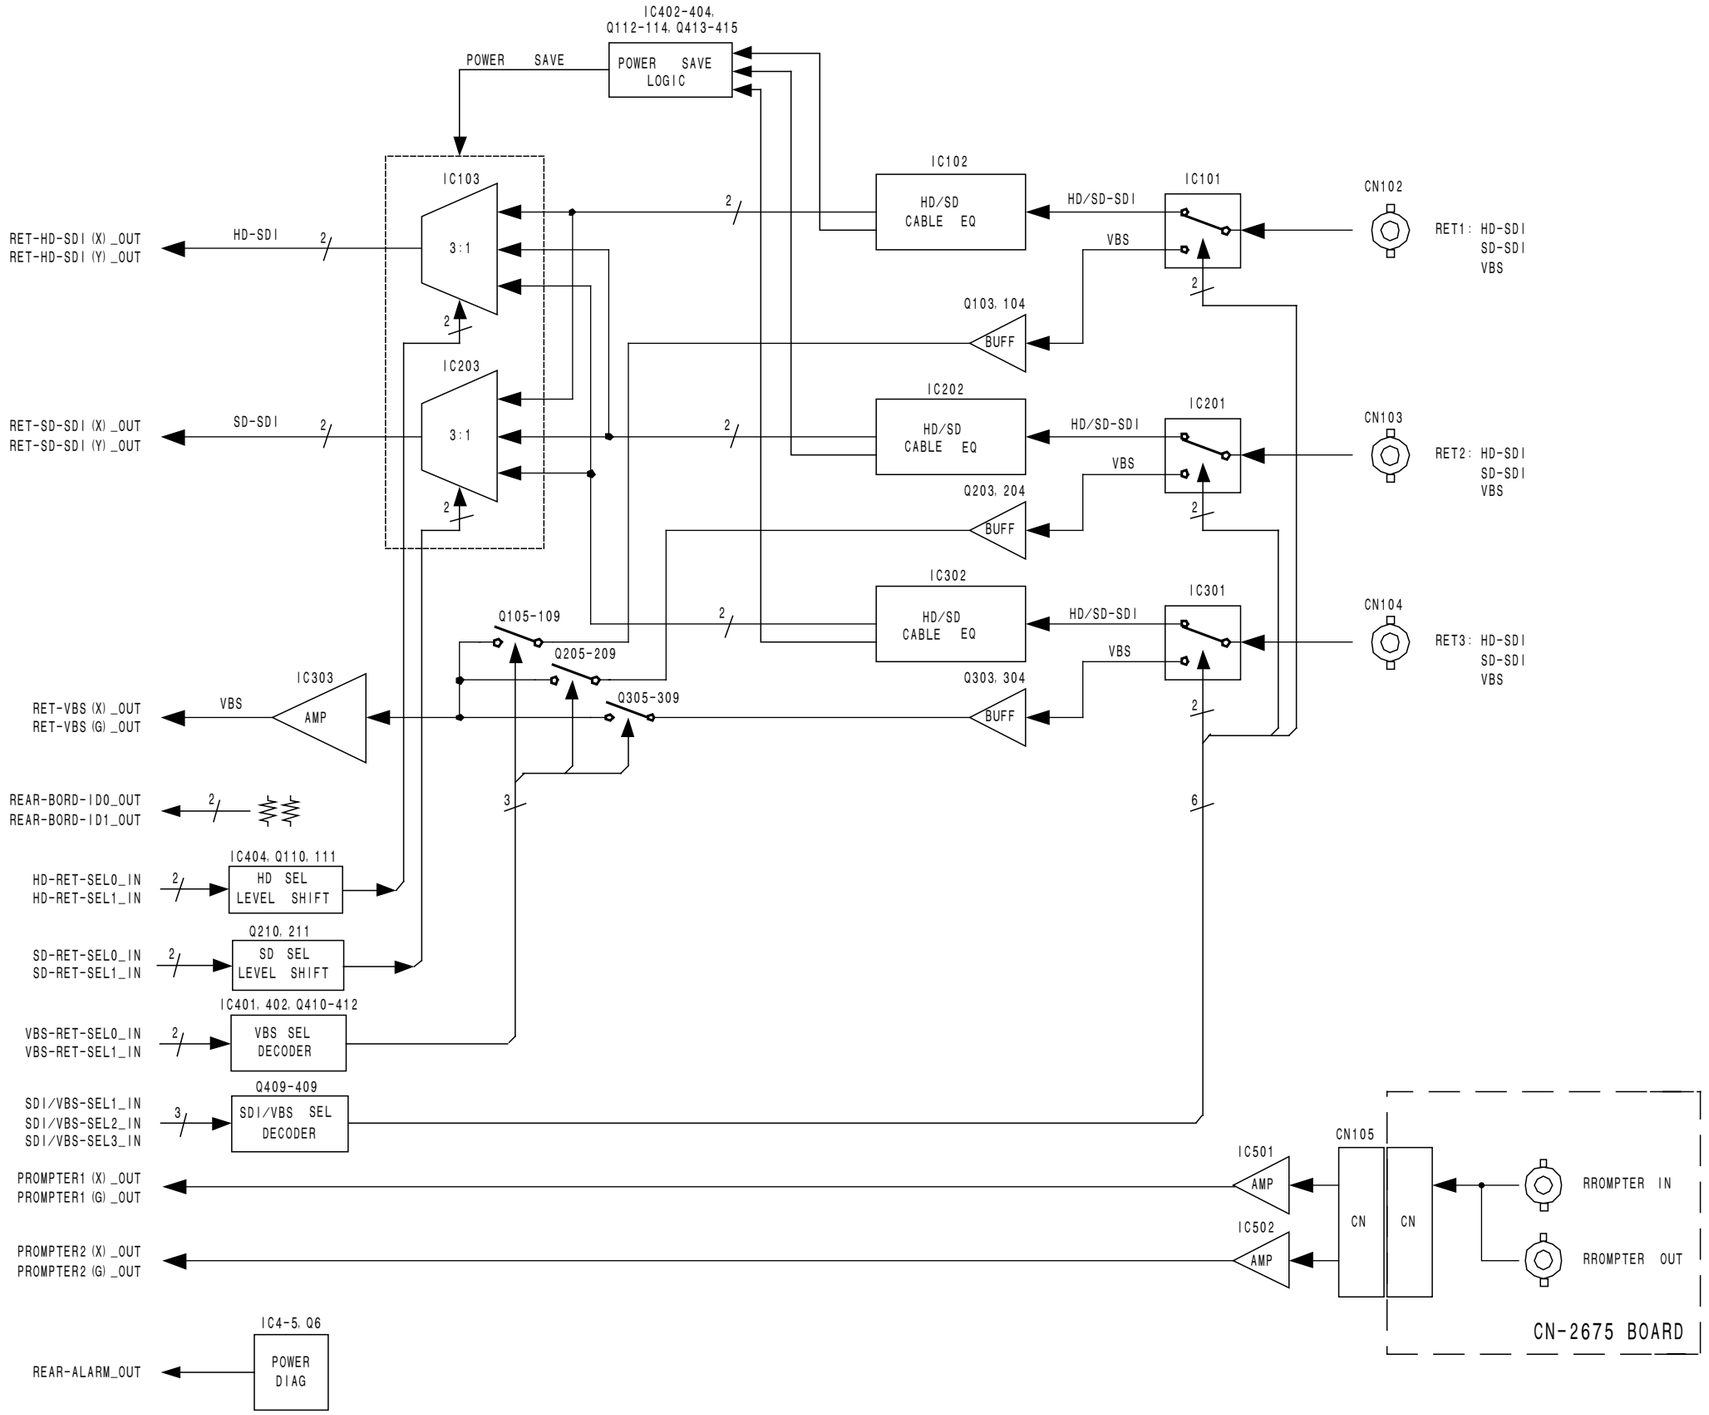

CONNECTOR (RCP/CNU/TRUNK)
CN-2675

RETURN INPUT
SDI-87

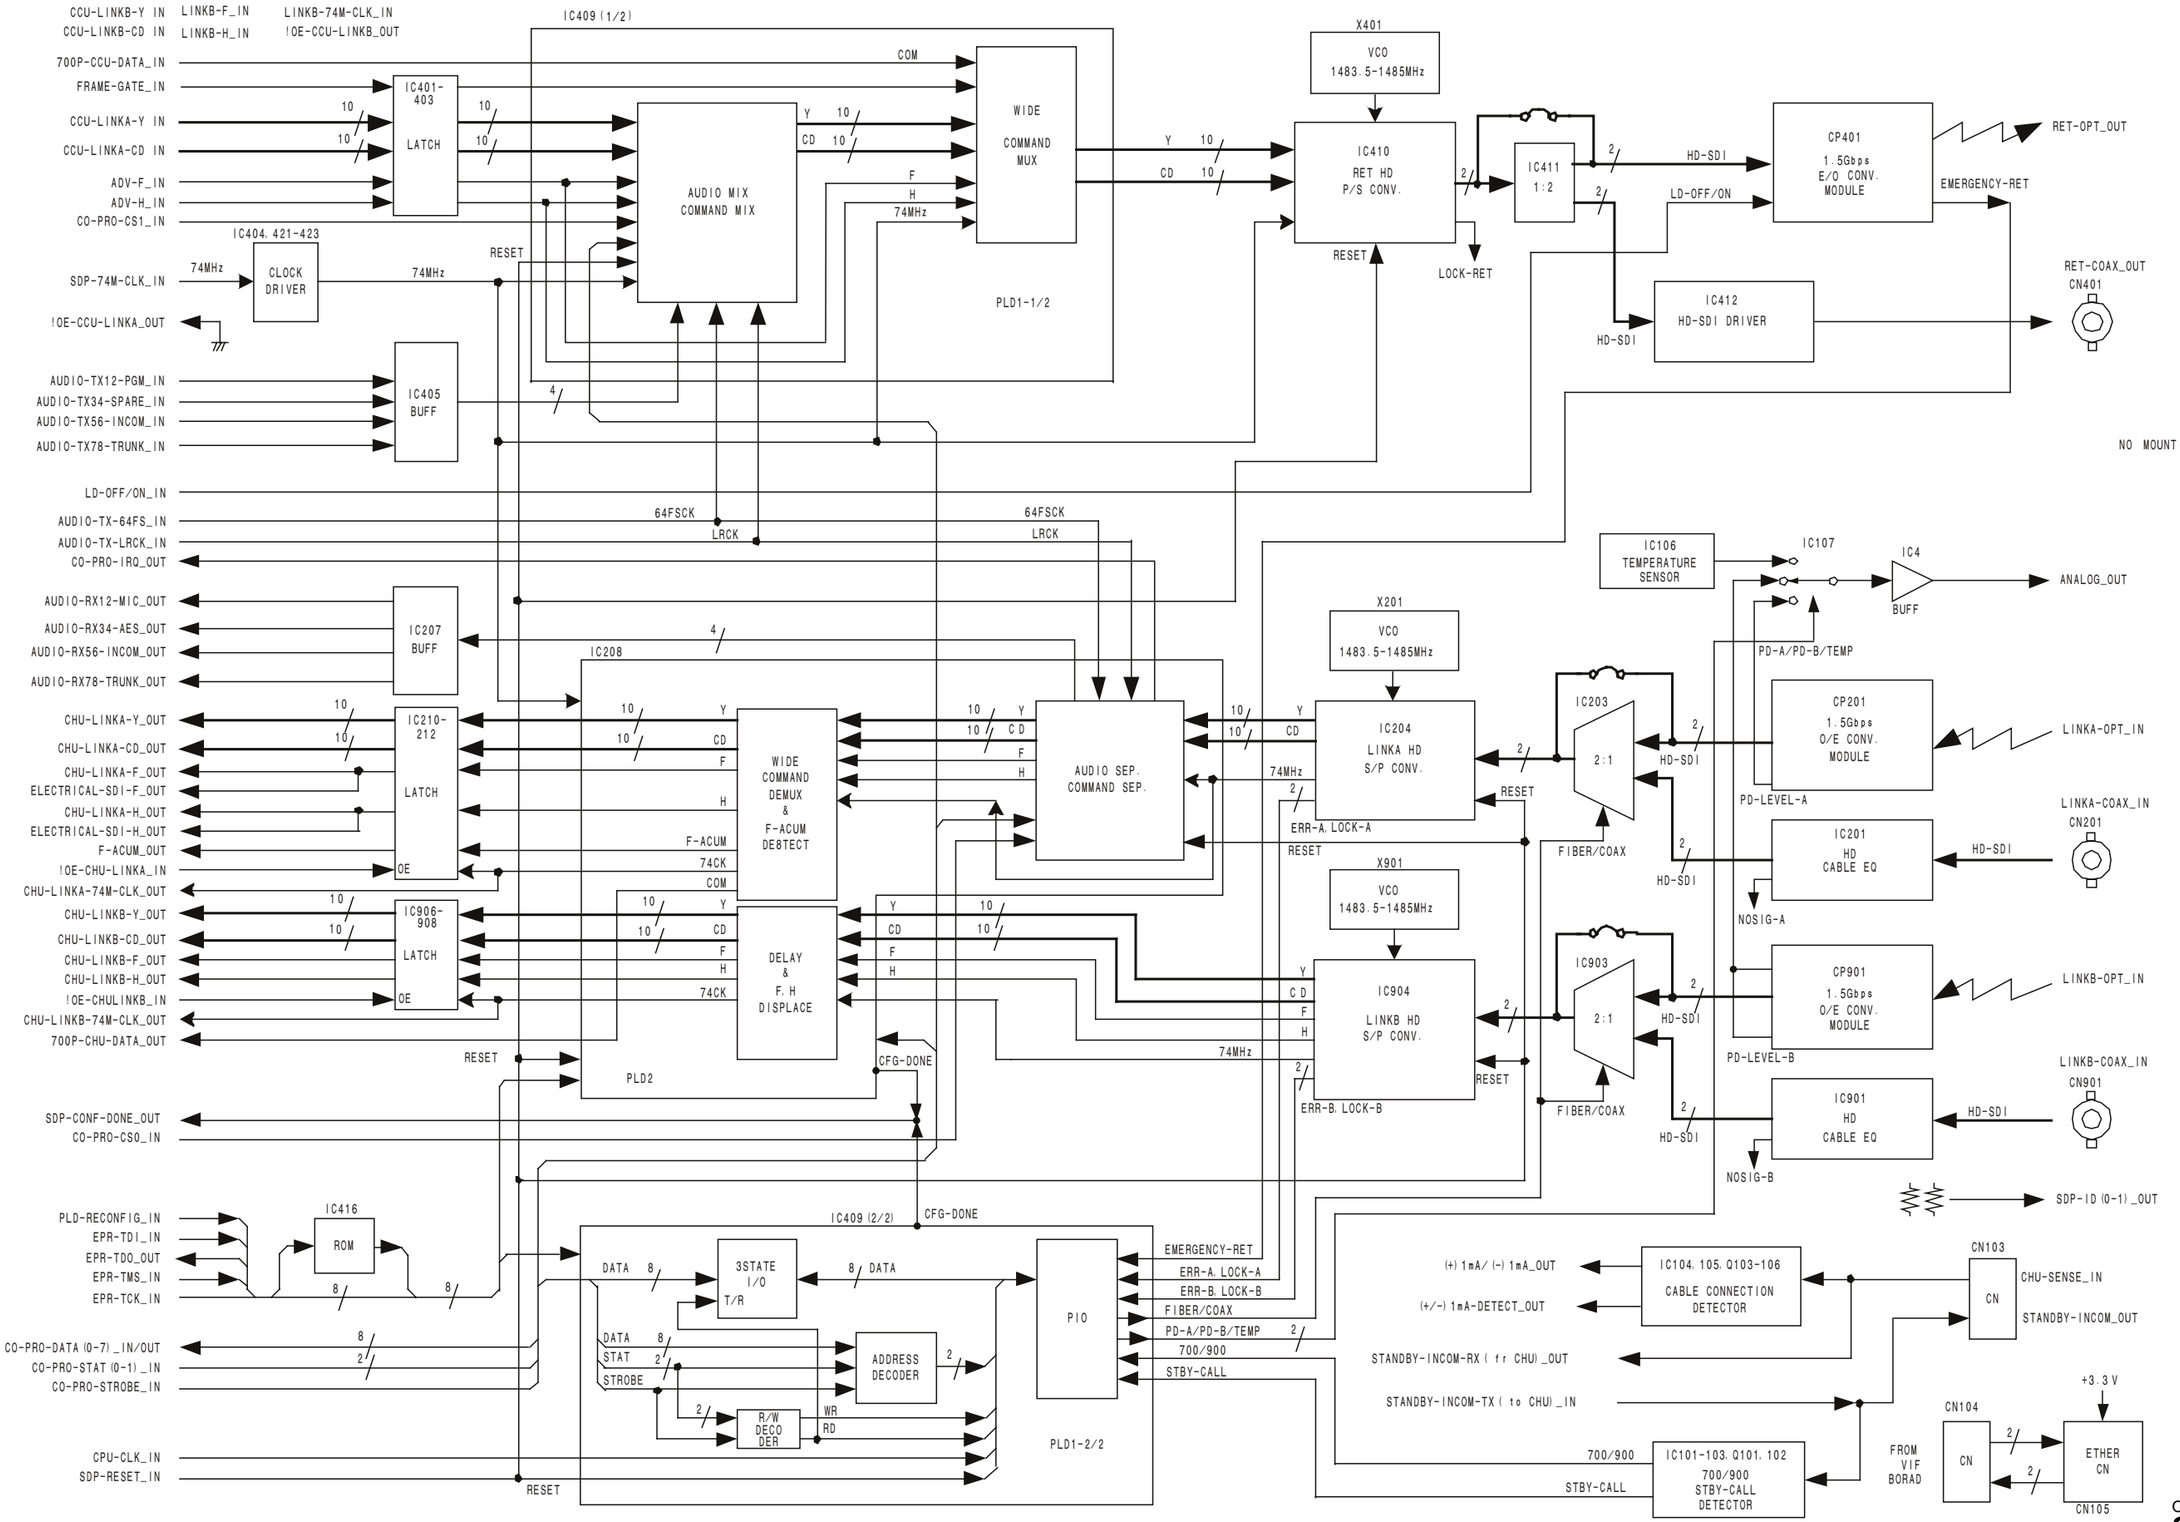

OPTICAL INTERFACE
SDP-12

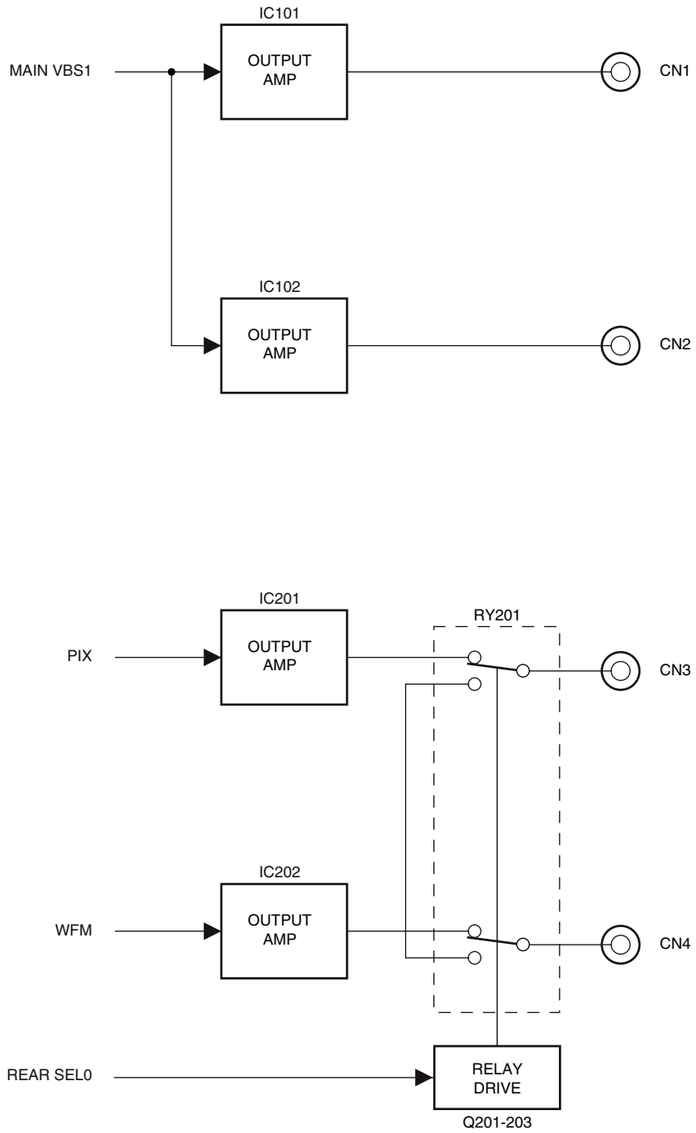

VDA-64A

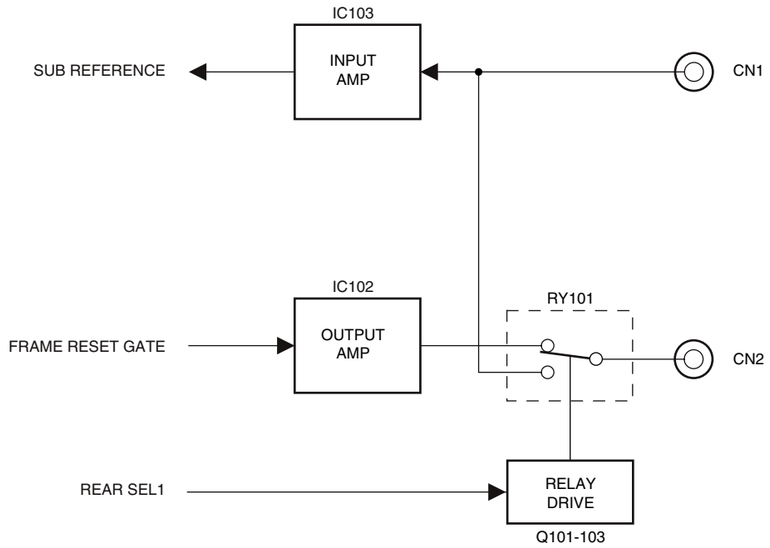

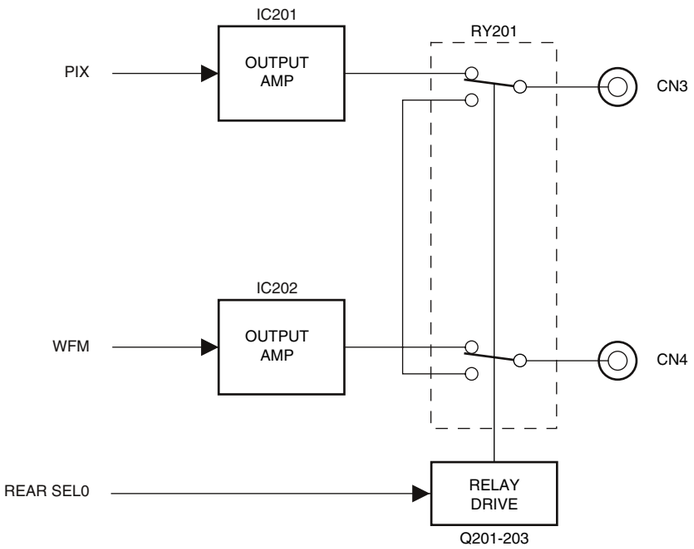

VDA-64B

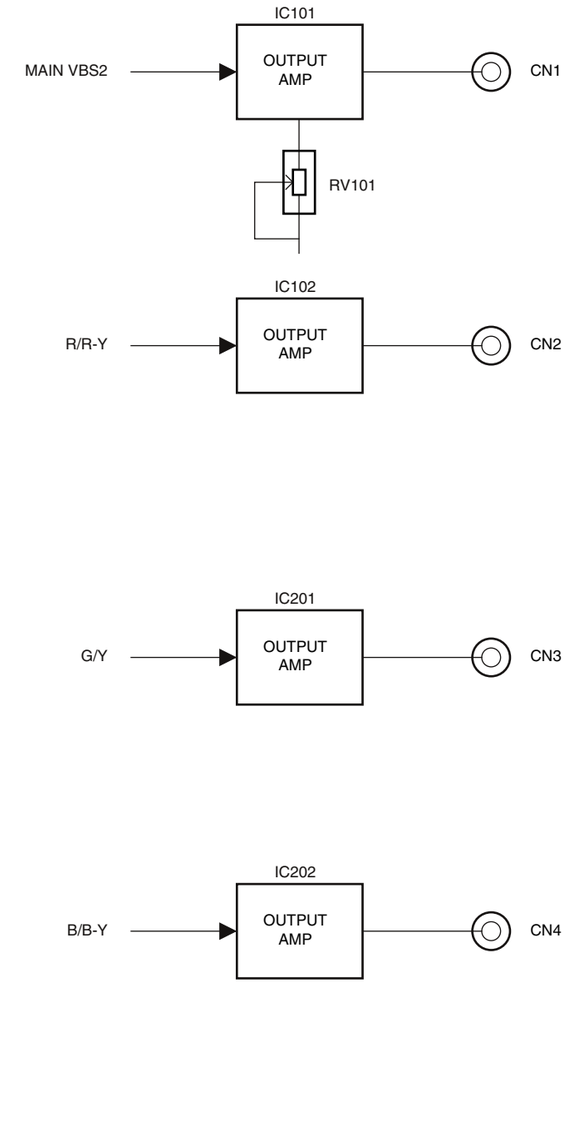

VDA-64C

SD ANALOG VIDEO OUTPUT
VDA-64A

FRAME REFERENCE INPUT &
SD ANALOG VIDEO OUTPUT
VDA-64B

SD ANALOG VIDEO OUTPUT
VDA-64C

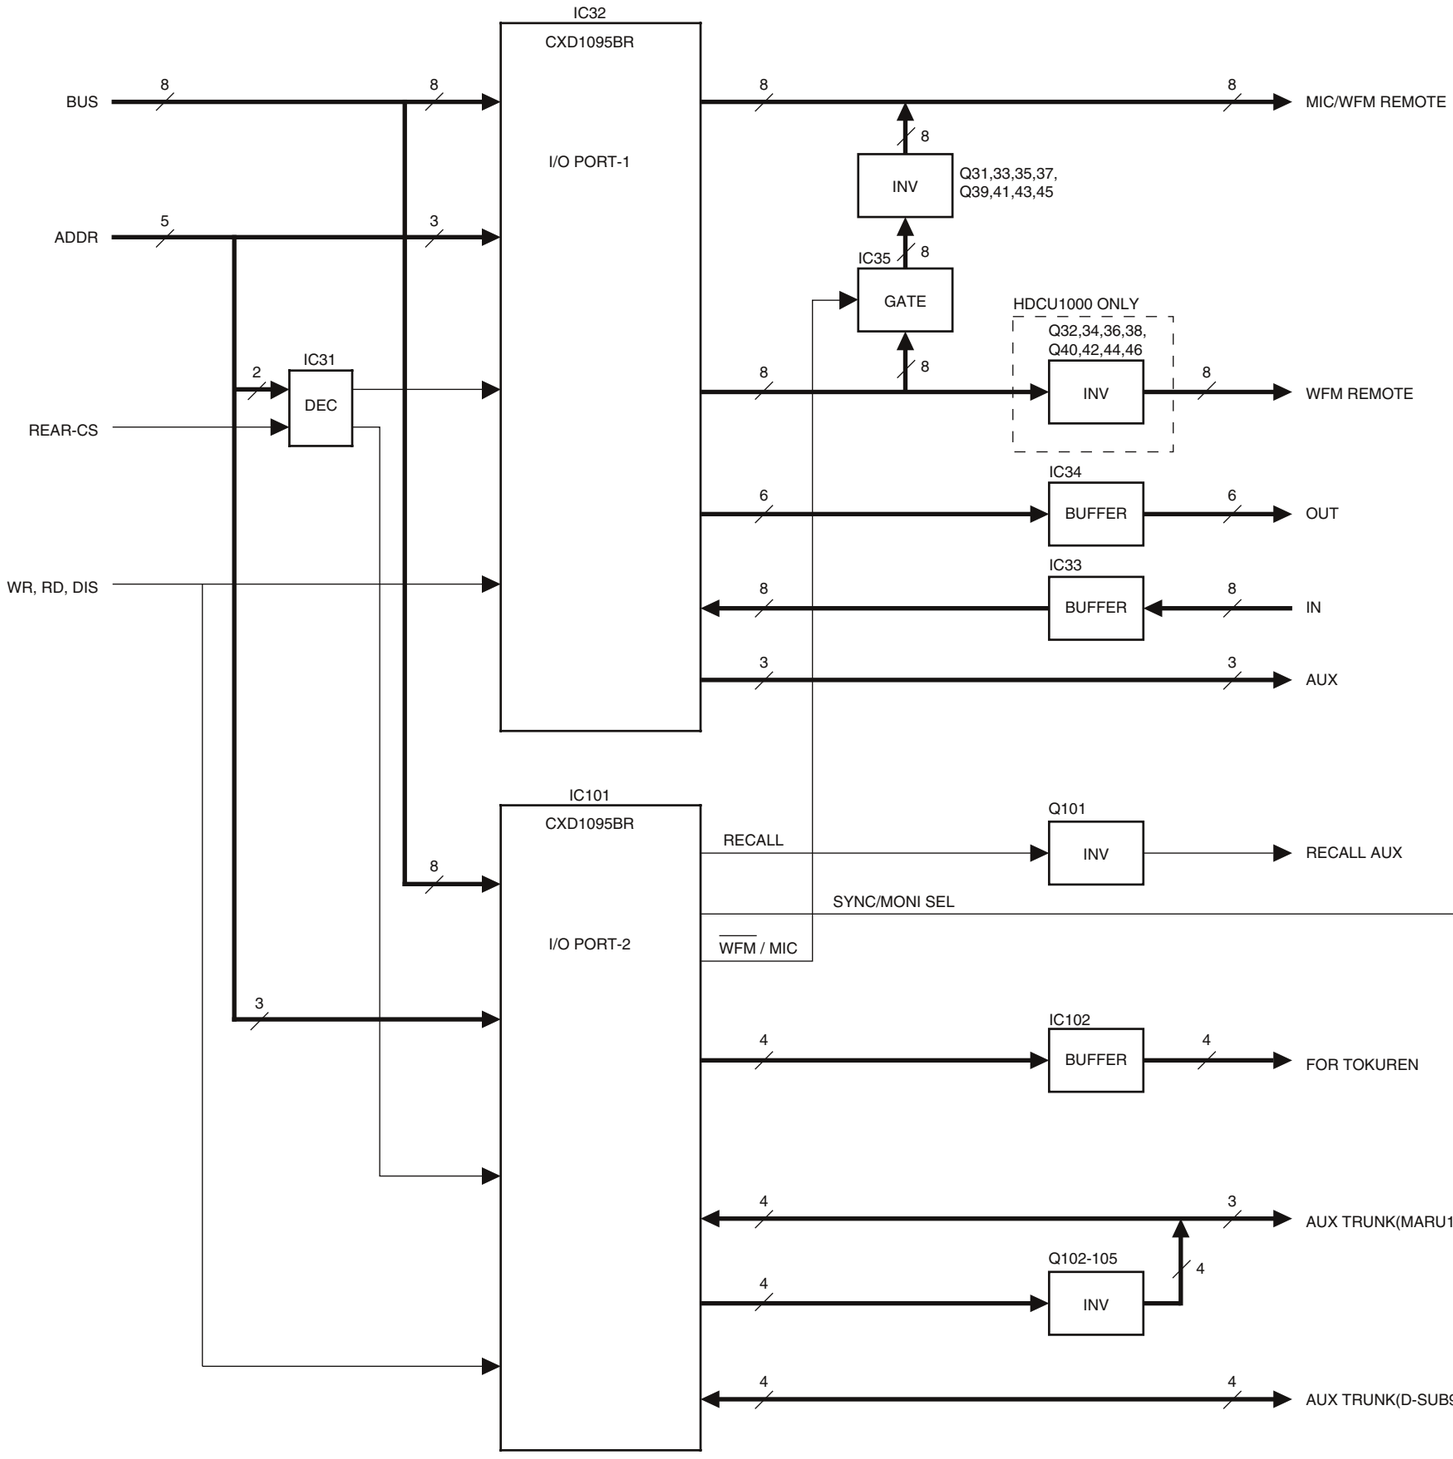

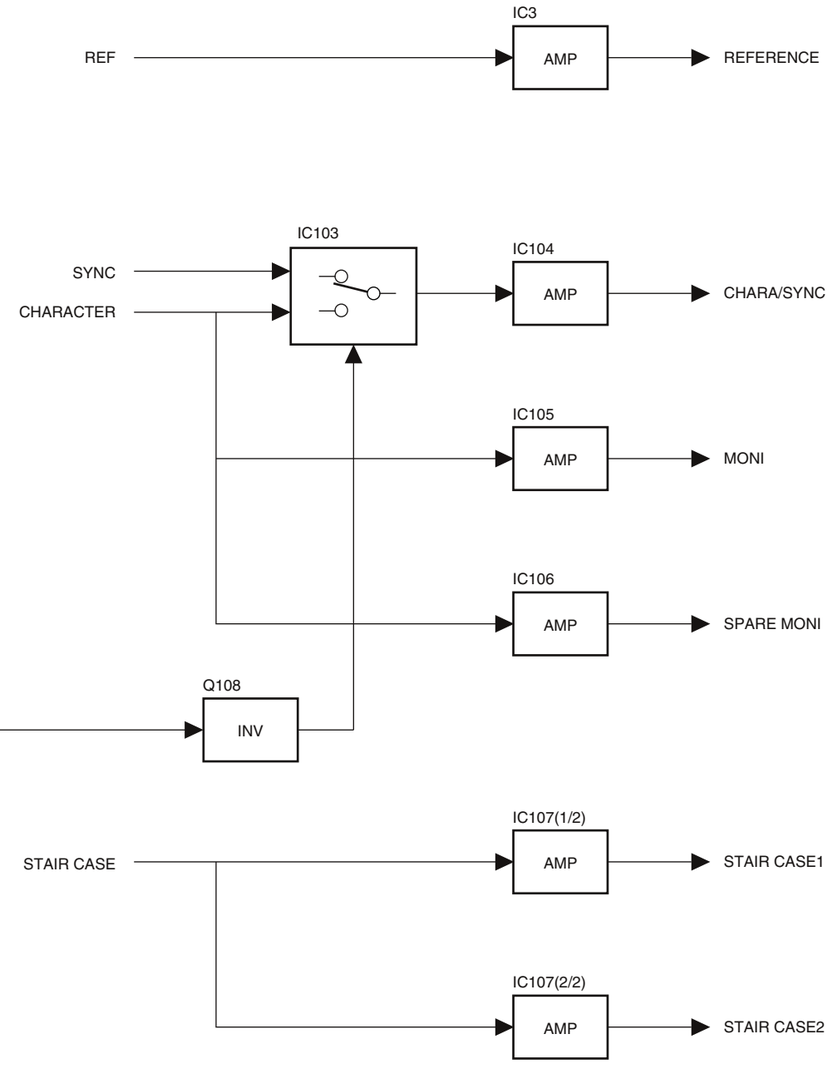

CONNECTOR INTERFACE
VIF-34

CONNECTOR INTERFACE
VIF-34B

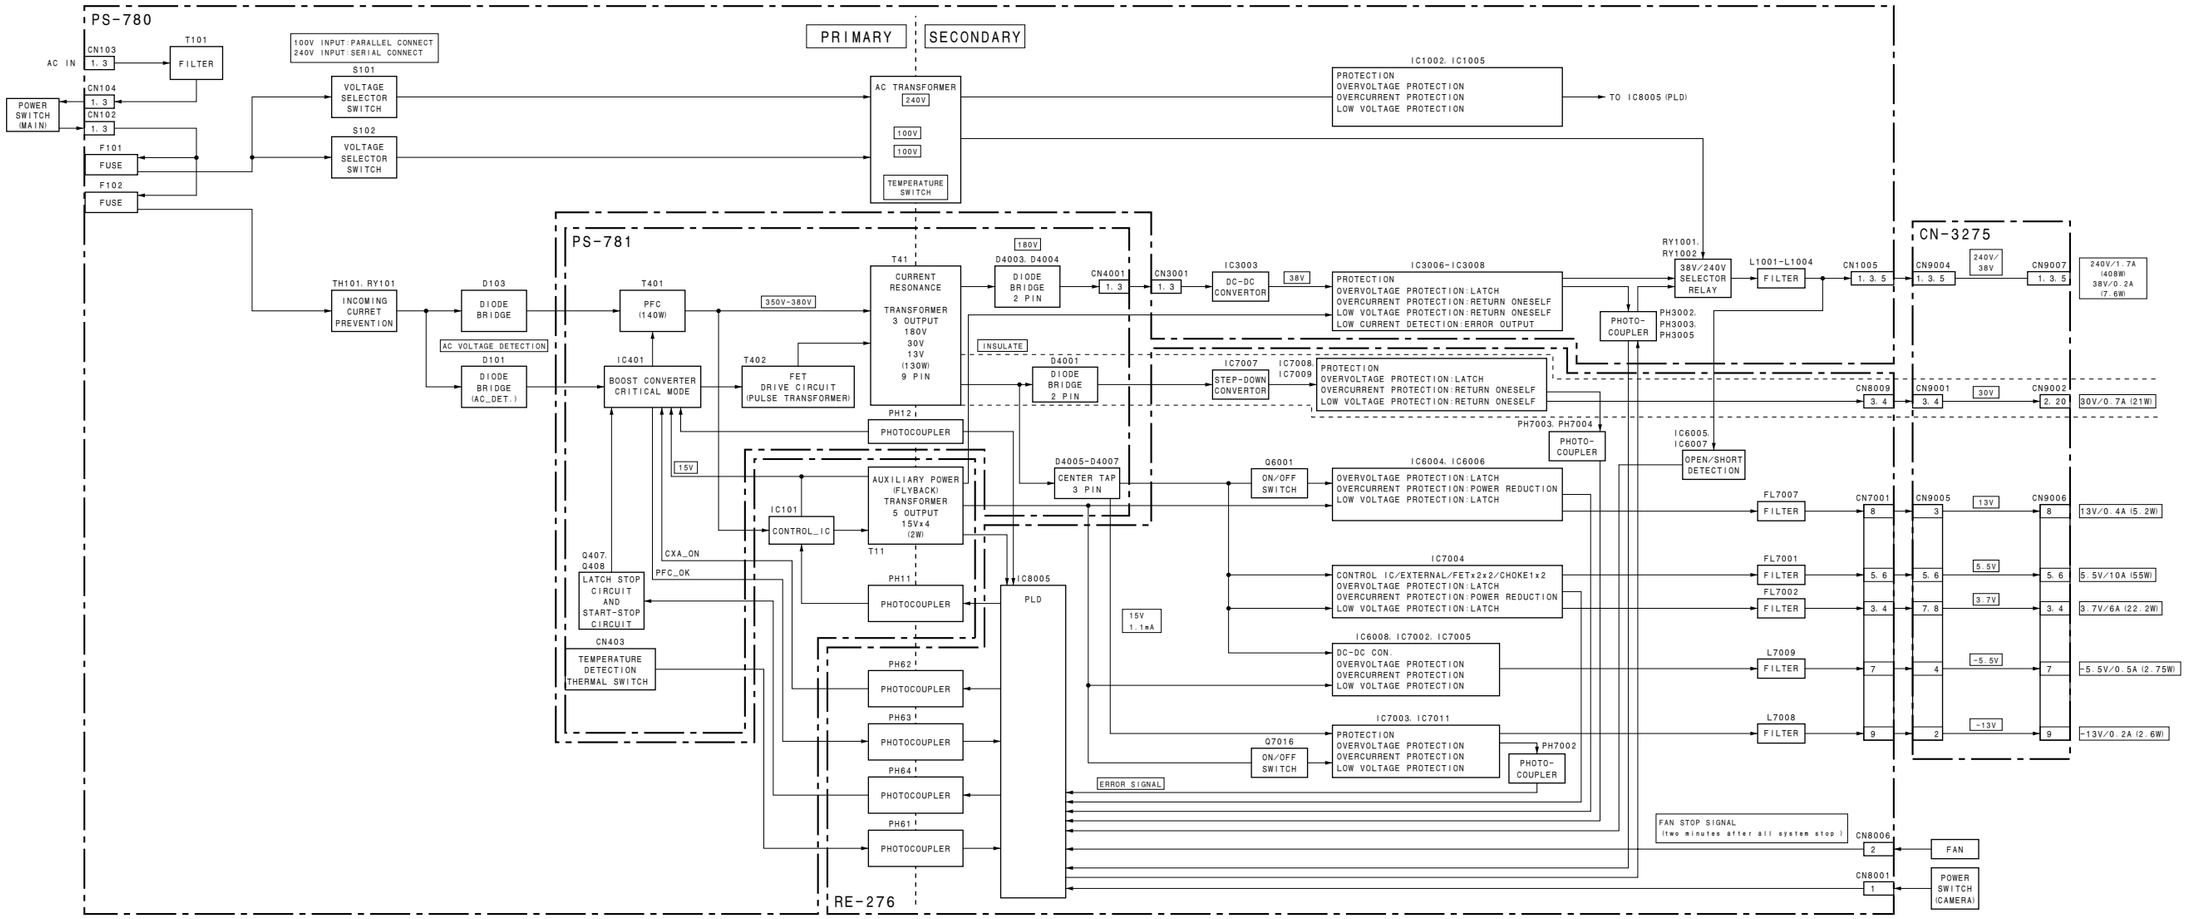

POWER BLOCK ASSEMBLY (A10)

CN-3275
PS-780
PS-781
RE-276

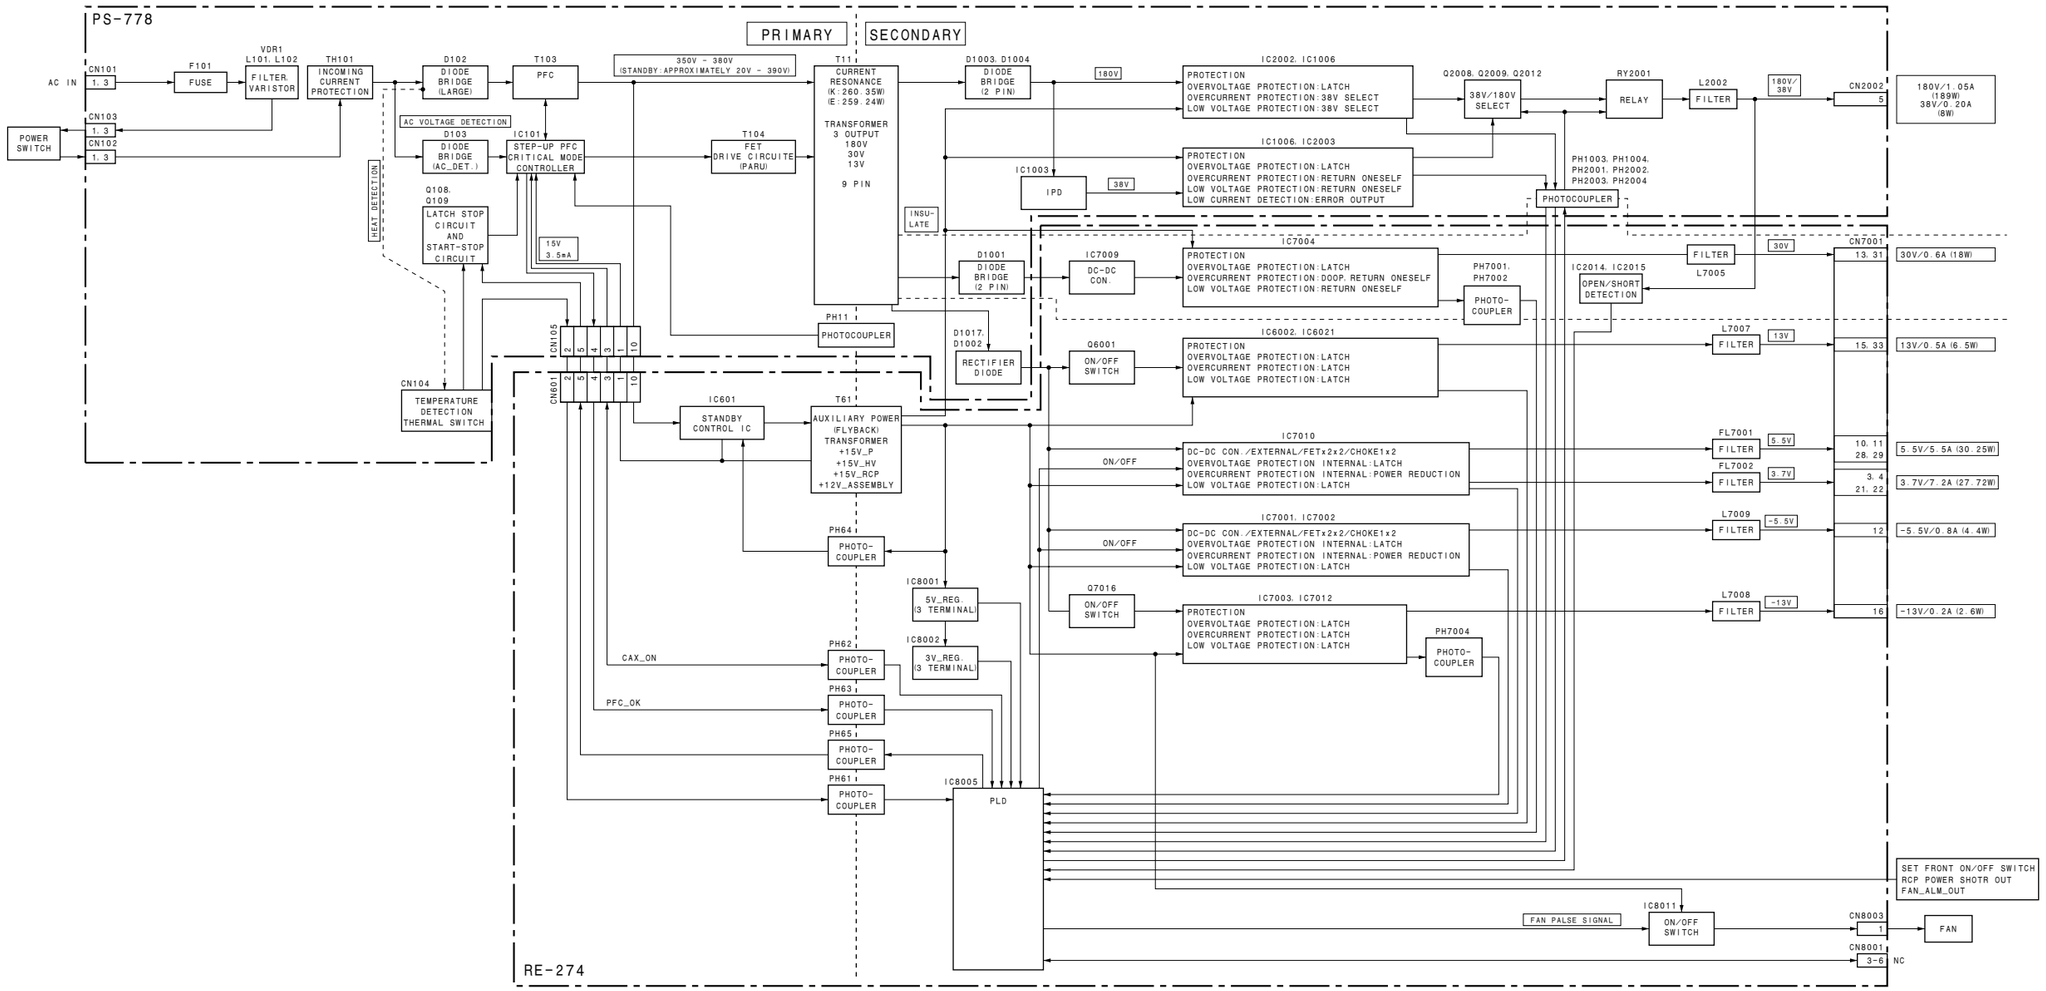

POWER BLOCK ASSEMBLY (D00)

PS-778
RE-274

Section 7
Schematic Diagrams

Index

Board Name	Page
ADO-10	7-2
AT-167	7-3
AU-302	7-13
AU-303/303G	7-16
AVP-6	7-19
CN-2672	7-27
CN-2673	7-28
CN-2674	7-28
CN-2675	7-29
CN-2676	7-30
CN-2677	7-30
CN-2678	7-31
CN-2700	7-31
CN-2718	7-30
CN-2805	7-30
CN-3275	7-32
CNB-21	7-34
CNB-22	7-36
DRX-5	7-37
DTX-5	7-48
DU-390	7-55
DU-565	7-56
EN-159A	7-57
EN-159B	7-65
HIF-25	7-73
HIF-26	7-74
HIF-27	7-75
MB-1071/1071A	7-76
MB-1072	7-80
PS-778	7-84
PS-780	7-87
PS-781	7-89
RE-274	7-90
RE-276	7-93
SDI-85	7-96
SDI-86	7-97
SDI-87/87G	7-98
SDP-12	7-99
VDA-64A	7-110
VDA-64B	7-111
VDA-64C	7-112

Board Name	Page
VIF-34B	7-113
VIF-34	7-117
Frame Wiring	7-120

Board List

Board Name	HDCU1000	HDCU1080	HDCU1500	HKCU1001	HKCU1003	HKCU1005
ADO-10/10G*	○	○	○	–	–	–
AT-167	○	○	○	–	–	–
AU-302	○	○	–	–	–	–
AU-303/303G	–	–	○	–	–	–
AVP-6	○	○	○	–	–	–
CN-2672/2672G*	○	○	–	–	–	–
CN-2673	○	○	–	–	–	–
CN-2674/2674G*	○	○	–	–	–	–
CN-2675/2675G*	–	–	○	–	–	–
CN-2676	–	–	○	–	–	–
CN-2677/2677G*	–	–	○	–	–	–
CN-2678	–	–	○	–	–	–
CN-2700	○	○	–	–	–	–
CN-2718	○	○	–	–	–	–
CN-2805/2805G*	○	○	–	–	–	–
CN-3275	○	○	–	–	–	–
CNB-21/21G*	○	○	–	–	–	–
CNB-22/22G*	–	–	○	–	–	–
DRX-5	○	○	○	–	–	○
DTX-5	○	○	○	–	–	–
DU-390	–	○	–	–	–	–
DU-565	–	–	○	–	–	–
EN-159A	–	–	–	○	–	–
EN-159B	–	–	–	–	○	–
HIF-25	○	○	–	–	–	–
HIF-26	–	–	–	–	–	○
HIF-27	–	–	○	–	–	–
MB-1071/1071A	○	○	–	–	–	–
MB-1072/1072G*	–	–	○	–	–	–
PS-778	–	–	○	–	–	–
PS-780	○	○	–	–	–	–
PS-781	○	○	–	–	–	–
RE-274	–	–	○	–	–	–
RE-276	○	○	–	–	–	–
SDI-85	○	○	–	–	–	–
SDI-86/86G*	○	○	–	–	–	–
SDI-87/87G	–	–	○	–	–	–
SDP-12/12C	○	○	○	–	–	–
VDA-64A	–	–	–	○	○	–
VDA-64B	–	–	–	–	○	–
VDA-64C	–	–	–	–	○	–
VIF-34B/34BG*	–	–	○	–	–	–
VIF-34/34G*	○	○	–	–	–	–

注意

＊印の基板は2種類ありますが，マニュアル内の記載では簡素化するため基板名には“G”を付けていません。

Note

The board with an asterisk (*) has two types. However, the board name in the manual does not have “G” at the end for simplification.

ADO-10 ADO-10

SUFFIX: -11, -31 **SUFFIX: -11, -31**

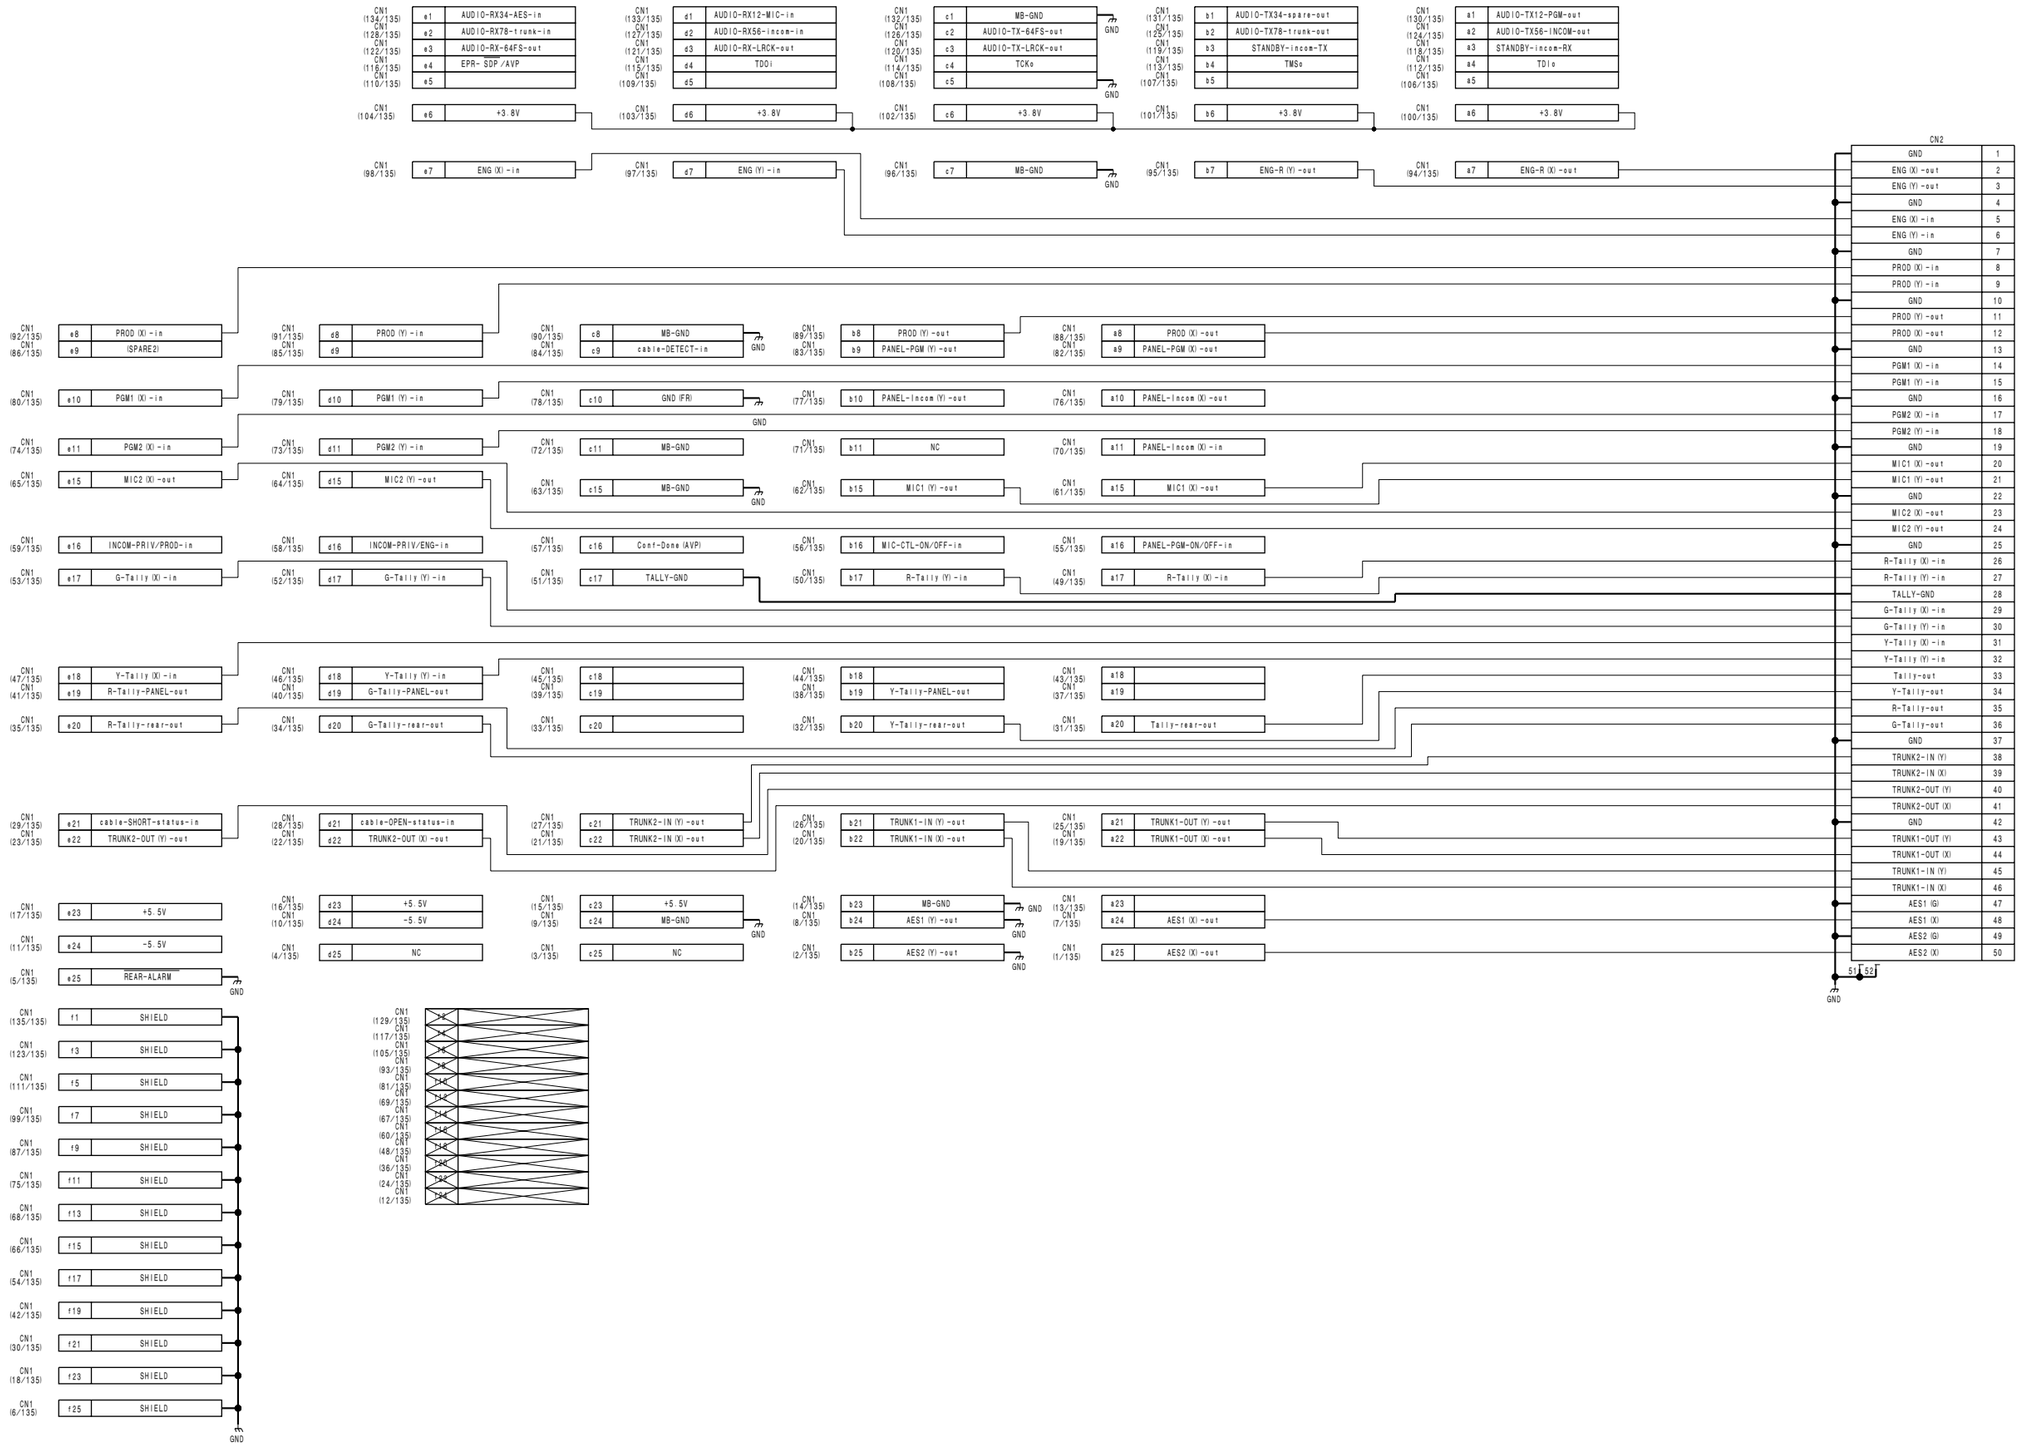

ADO-10

BOARD NO. 1-867-886-11, 31

HDCU1000_ADO-10_011_1

AT-167 (1/6)
SUFFIX: -11, -12, -13, -14, -31

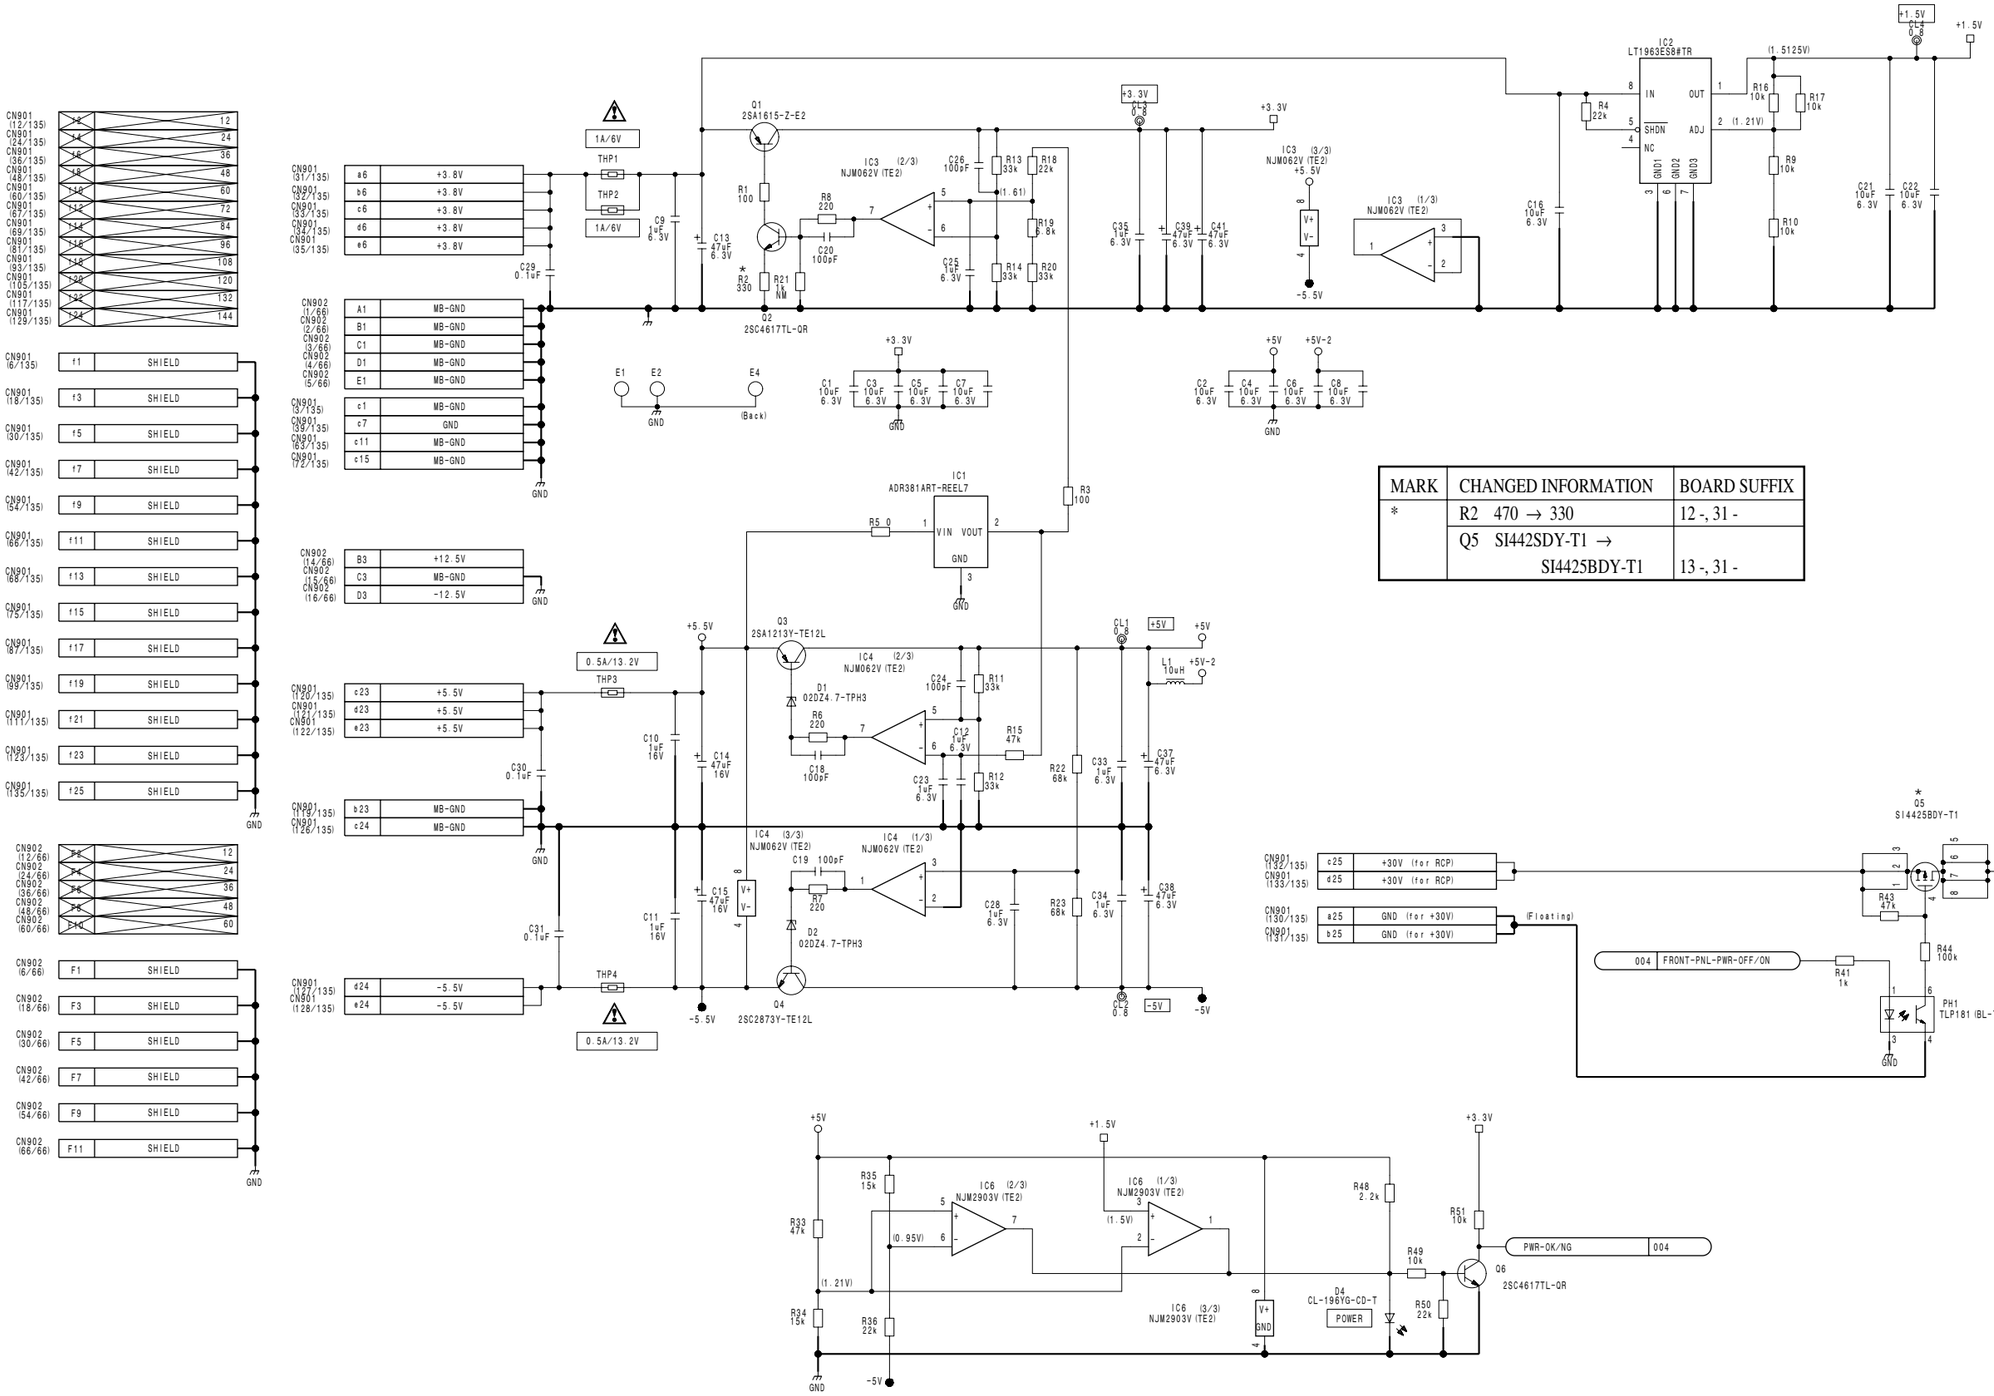

MARK	CHANGED INFORMATION	BOARD SUFFIX
*	R2 470 → 330	12 -, 31 -
	Q5 SI442SDY-T1 → SI4425BDY-T1	13 -, 31 -

CN901 (46/135) CN901 (47/135) CN901 (82/135) CN901 (97/135) CN901 (98/135) CN901 (109/135) CN901 (110/135) CN901 (113/135)	d8	Prompter (G) -Rear-if
	e8	Prompter (X) -Rear-if
	b11	nc
	d19	RM-PIX-S (G) -if
	e19	RM-PIX-S (X) -if
	d21	RM-PIX-M (G) -if
	e21	RM-PIX-M (X) -if
	b22	

CN902 (28/66)	D5	WFM-STAIR-CASE-if

AT-167 (1/6)
BOARD NO. 1-867-877-11, 12, 13, 14, 31
HDCU1000_AT-167_011_1

MARK	CHANGED INFORMATION	BOARD SUFFIX
*	IC101: CAT24WC02JI-TE13 → CAT24C02WI-GT3	13 -, 31 -

AT-167 (2/6)
SUFFIX: -11, -12, -13, -31

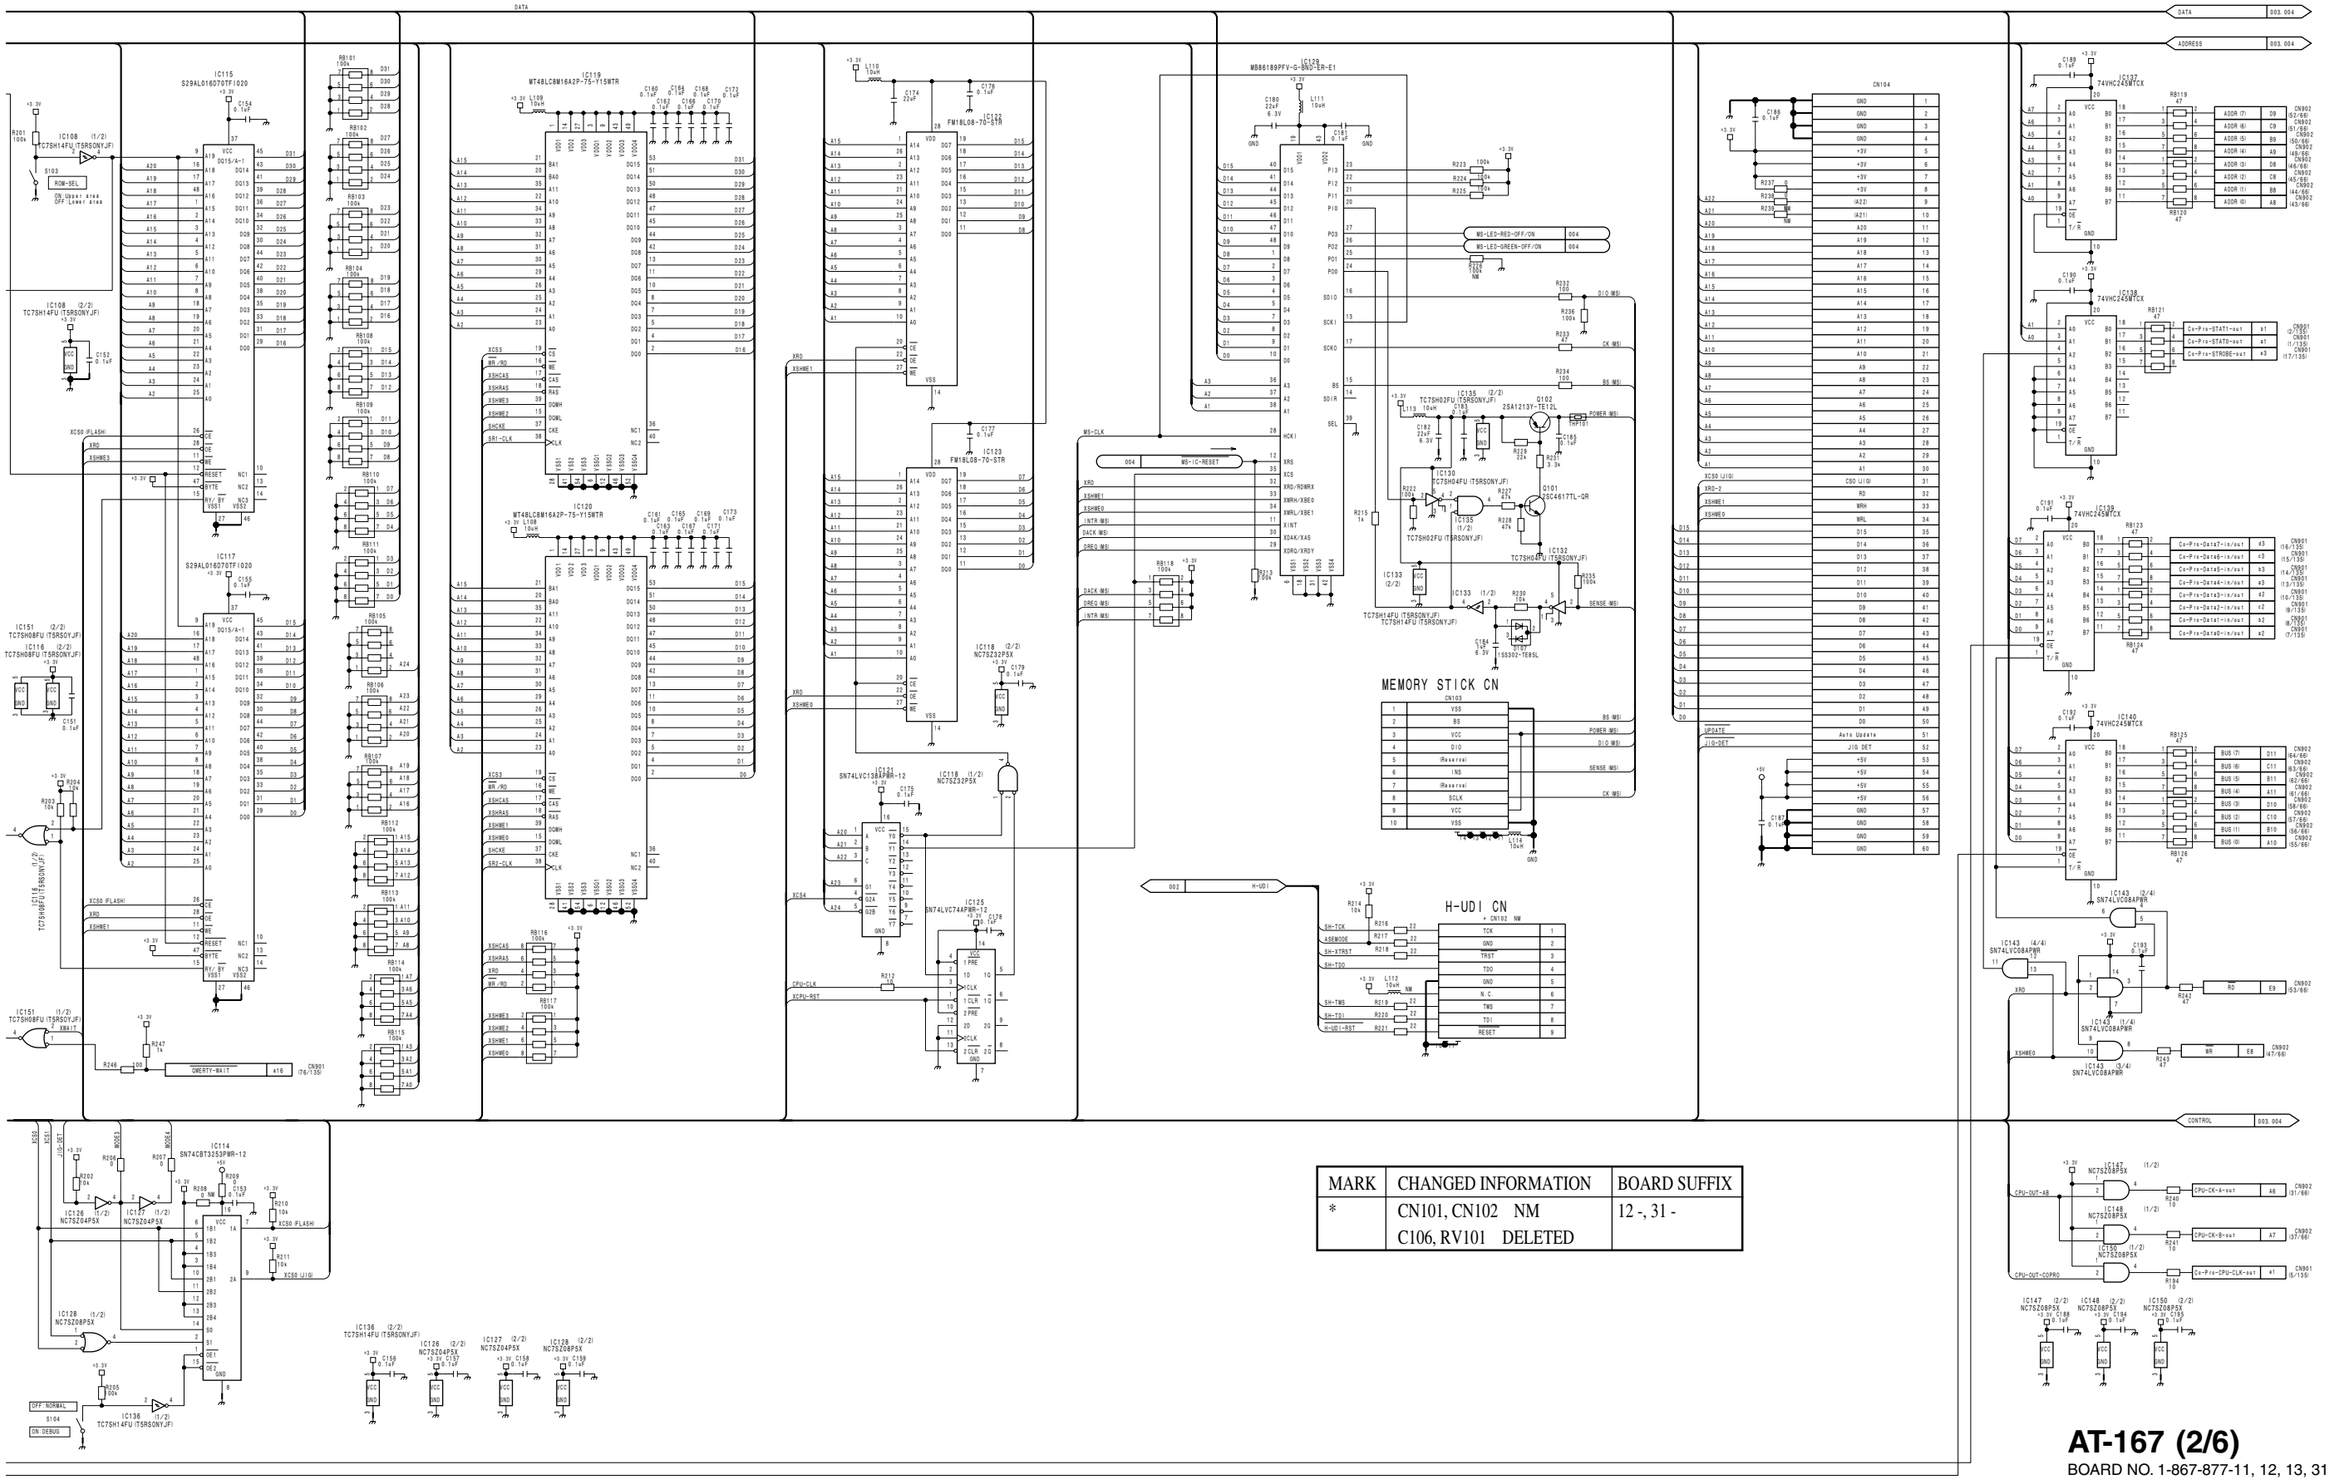

MARK	CHANGED INFORMATION	BOARD SUFFIX
*	CN101, CN102 NM C106, RV101 DELETED	12 -, 31 -

AT-167 (2/6)
BOARD NO. 1-867-877-11, 12, 13, 31
HDCU1000_AT-167_011_2

AT-167 (2/6)
SUFFIX: -14

AT-167 (2/6)
SUFFIX: -14

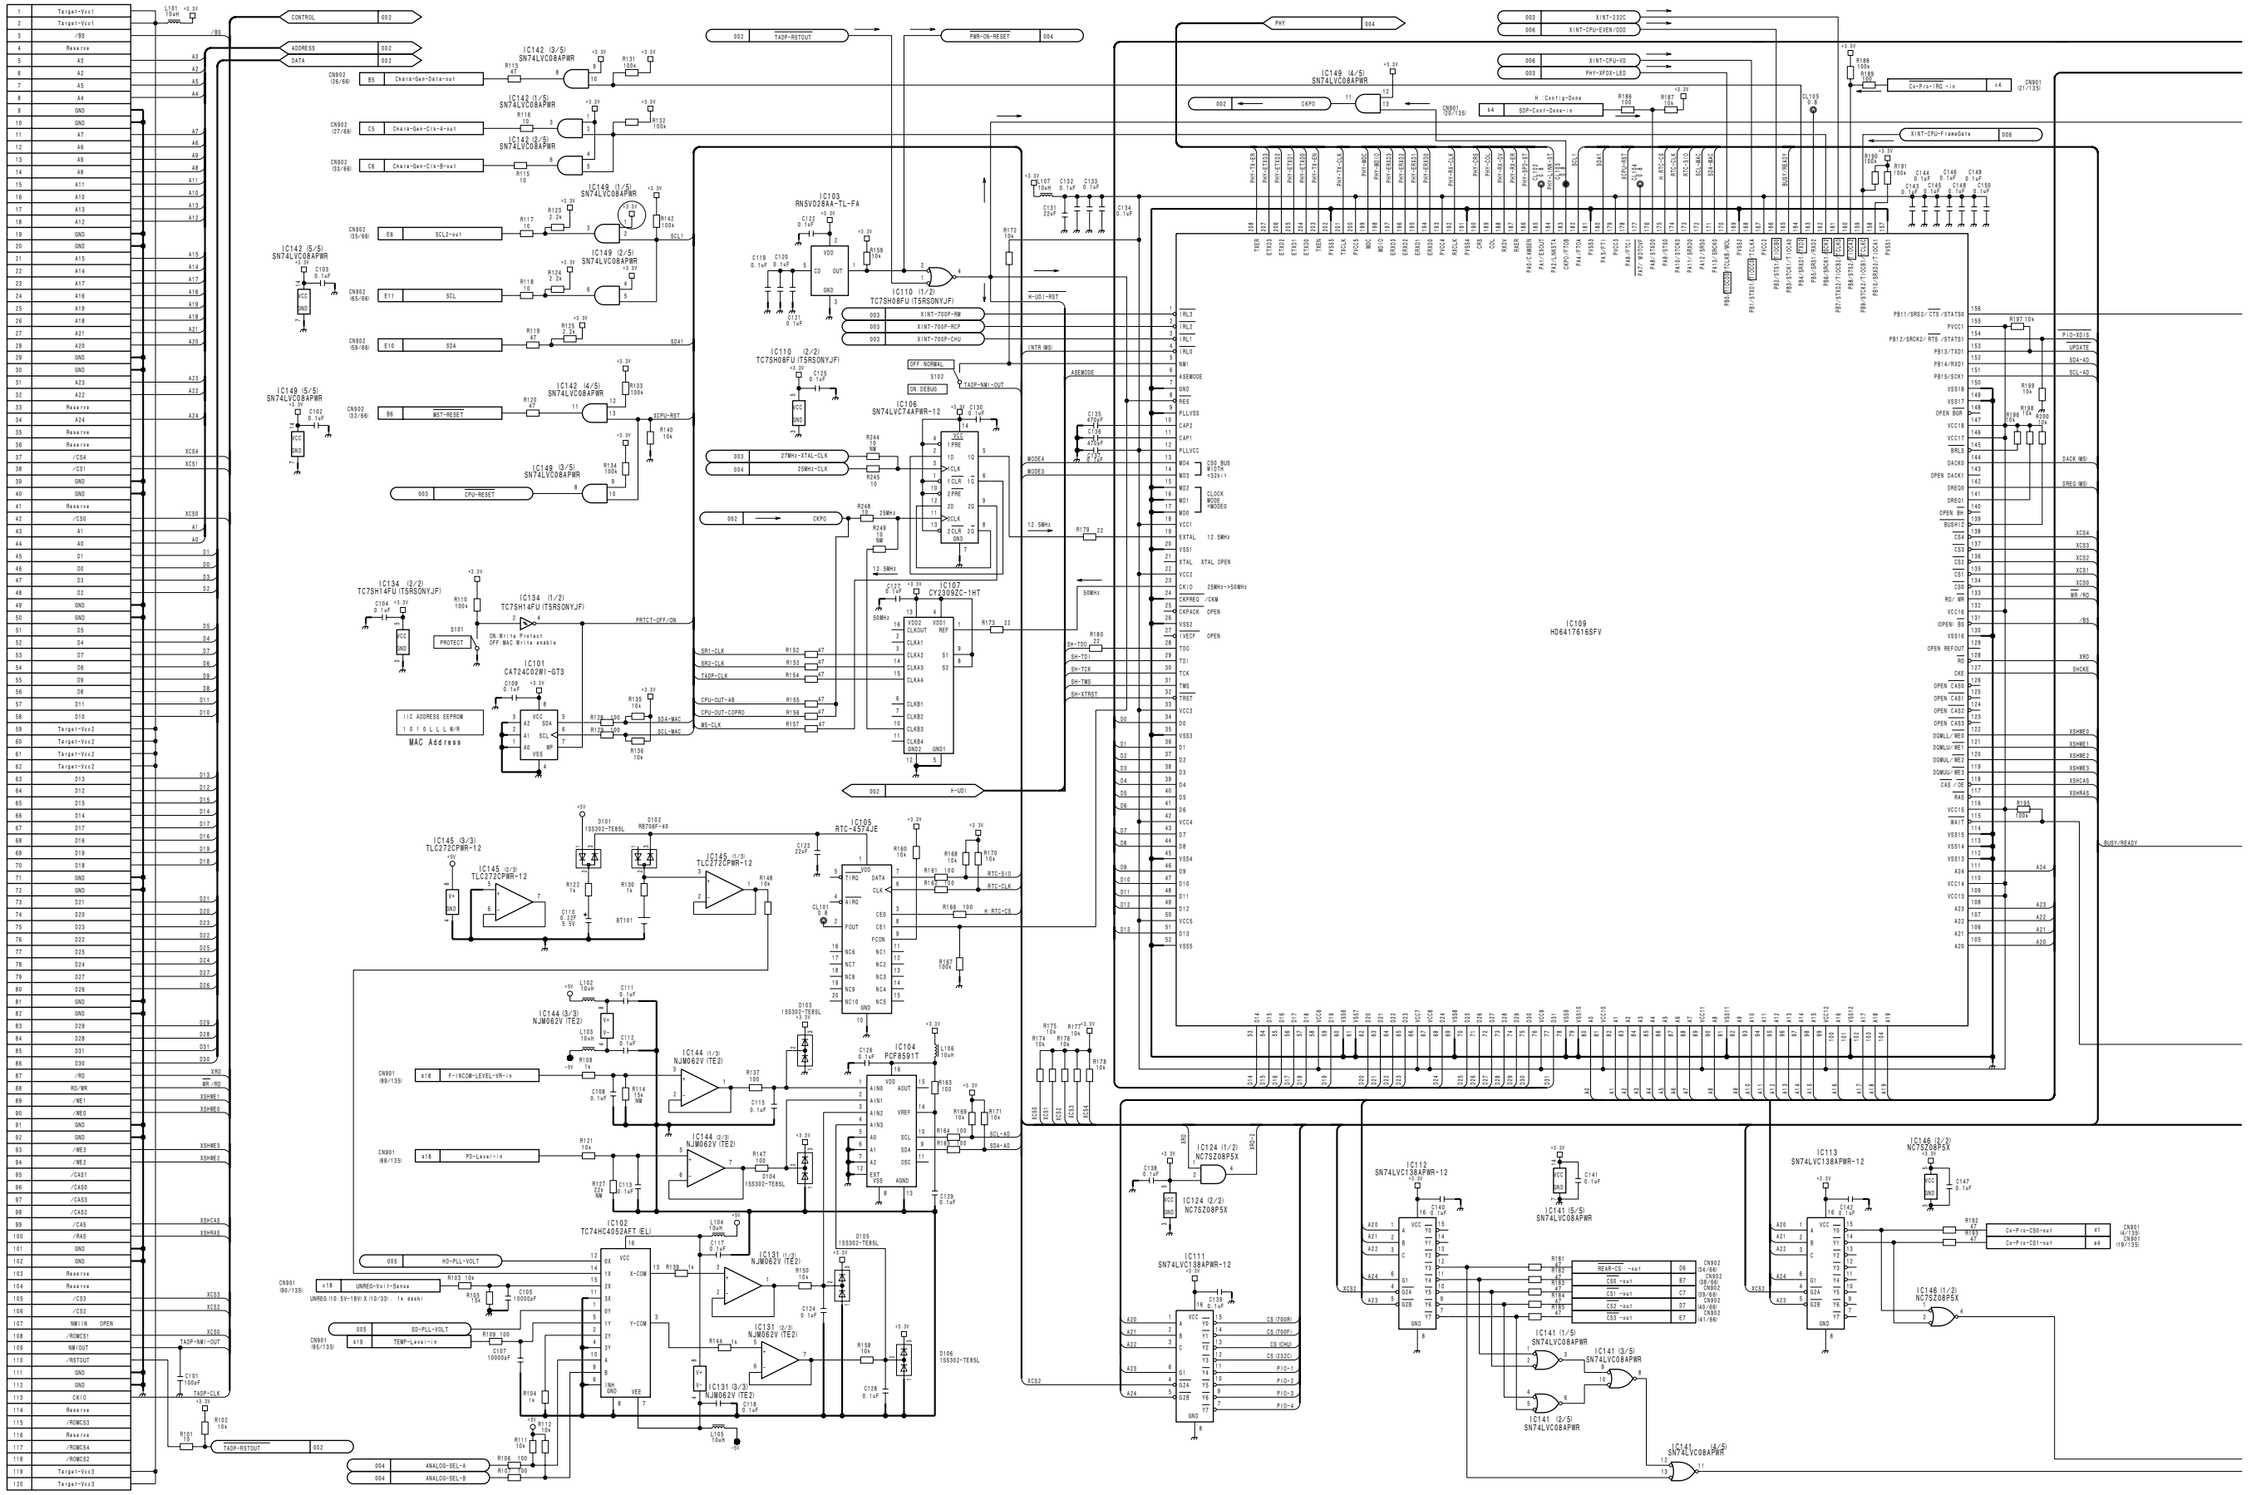

7-4 (a)

AT-167 (2/6)
SUFFIX: -14

AT-167 (2/6)
SUFFIX: -14

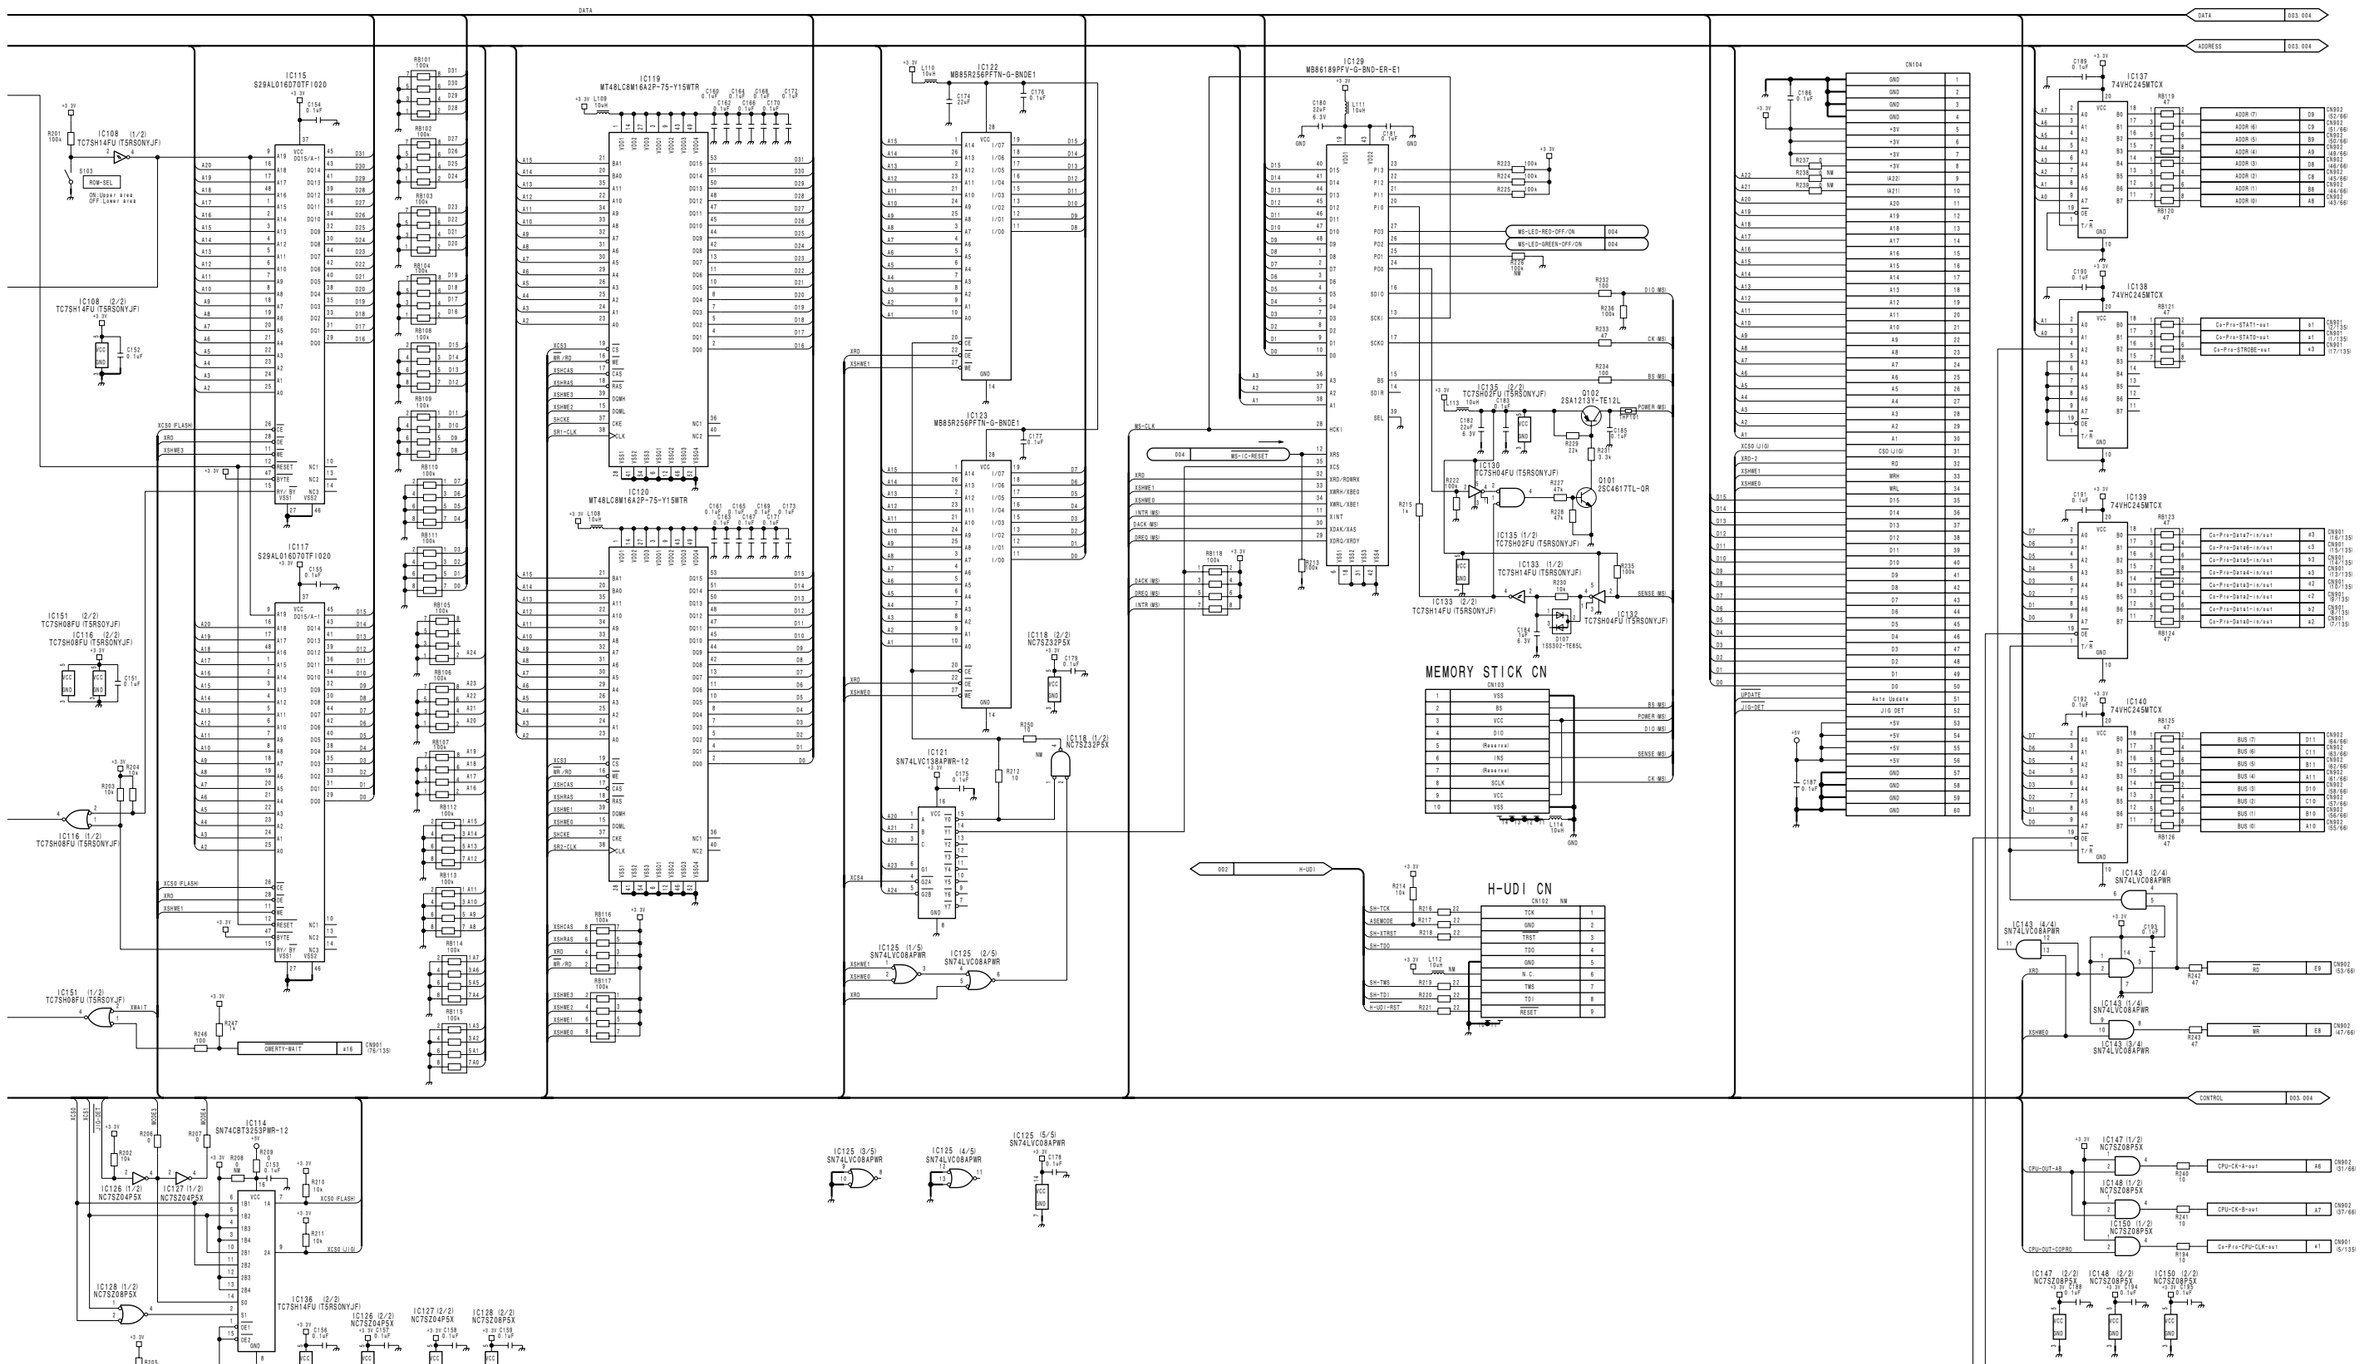

AT-167 (2/6)
BOARD NO. 1-867-877-14
HDCU1000_AT-167_014_2

AT-167 (3/6)
SUFFIX: -11, -12, -13, -14, -31

MARK	CHANGED INFORMATION	BOARD SUFFIX
*	R336 DELETED R340 100 → 10k IC309 ADDED	12 -, 31 -

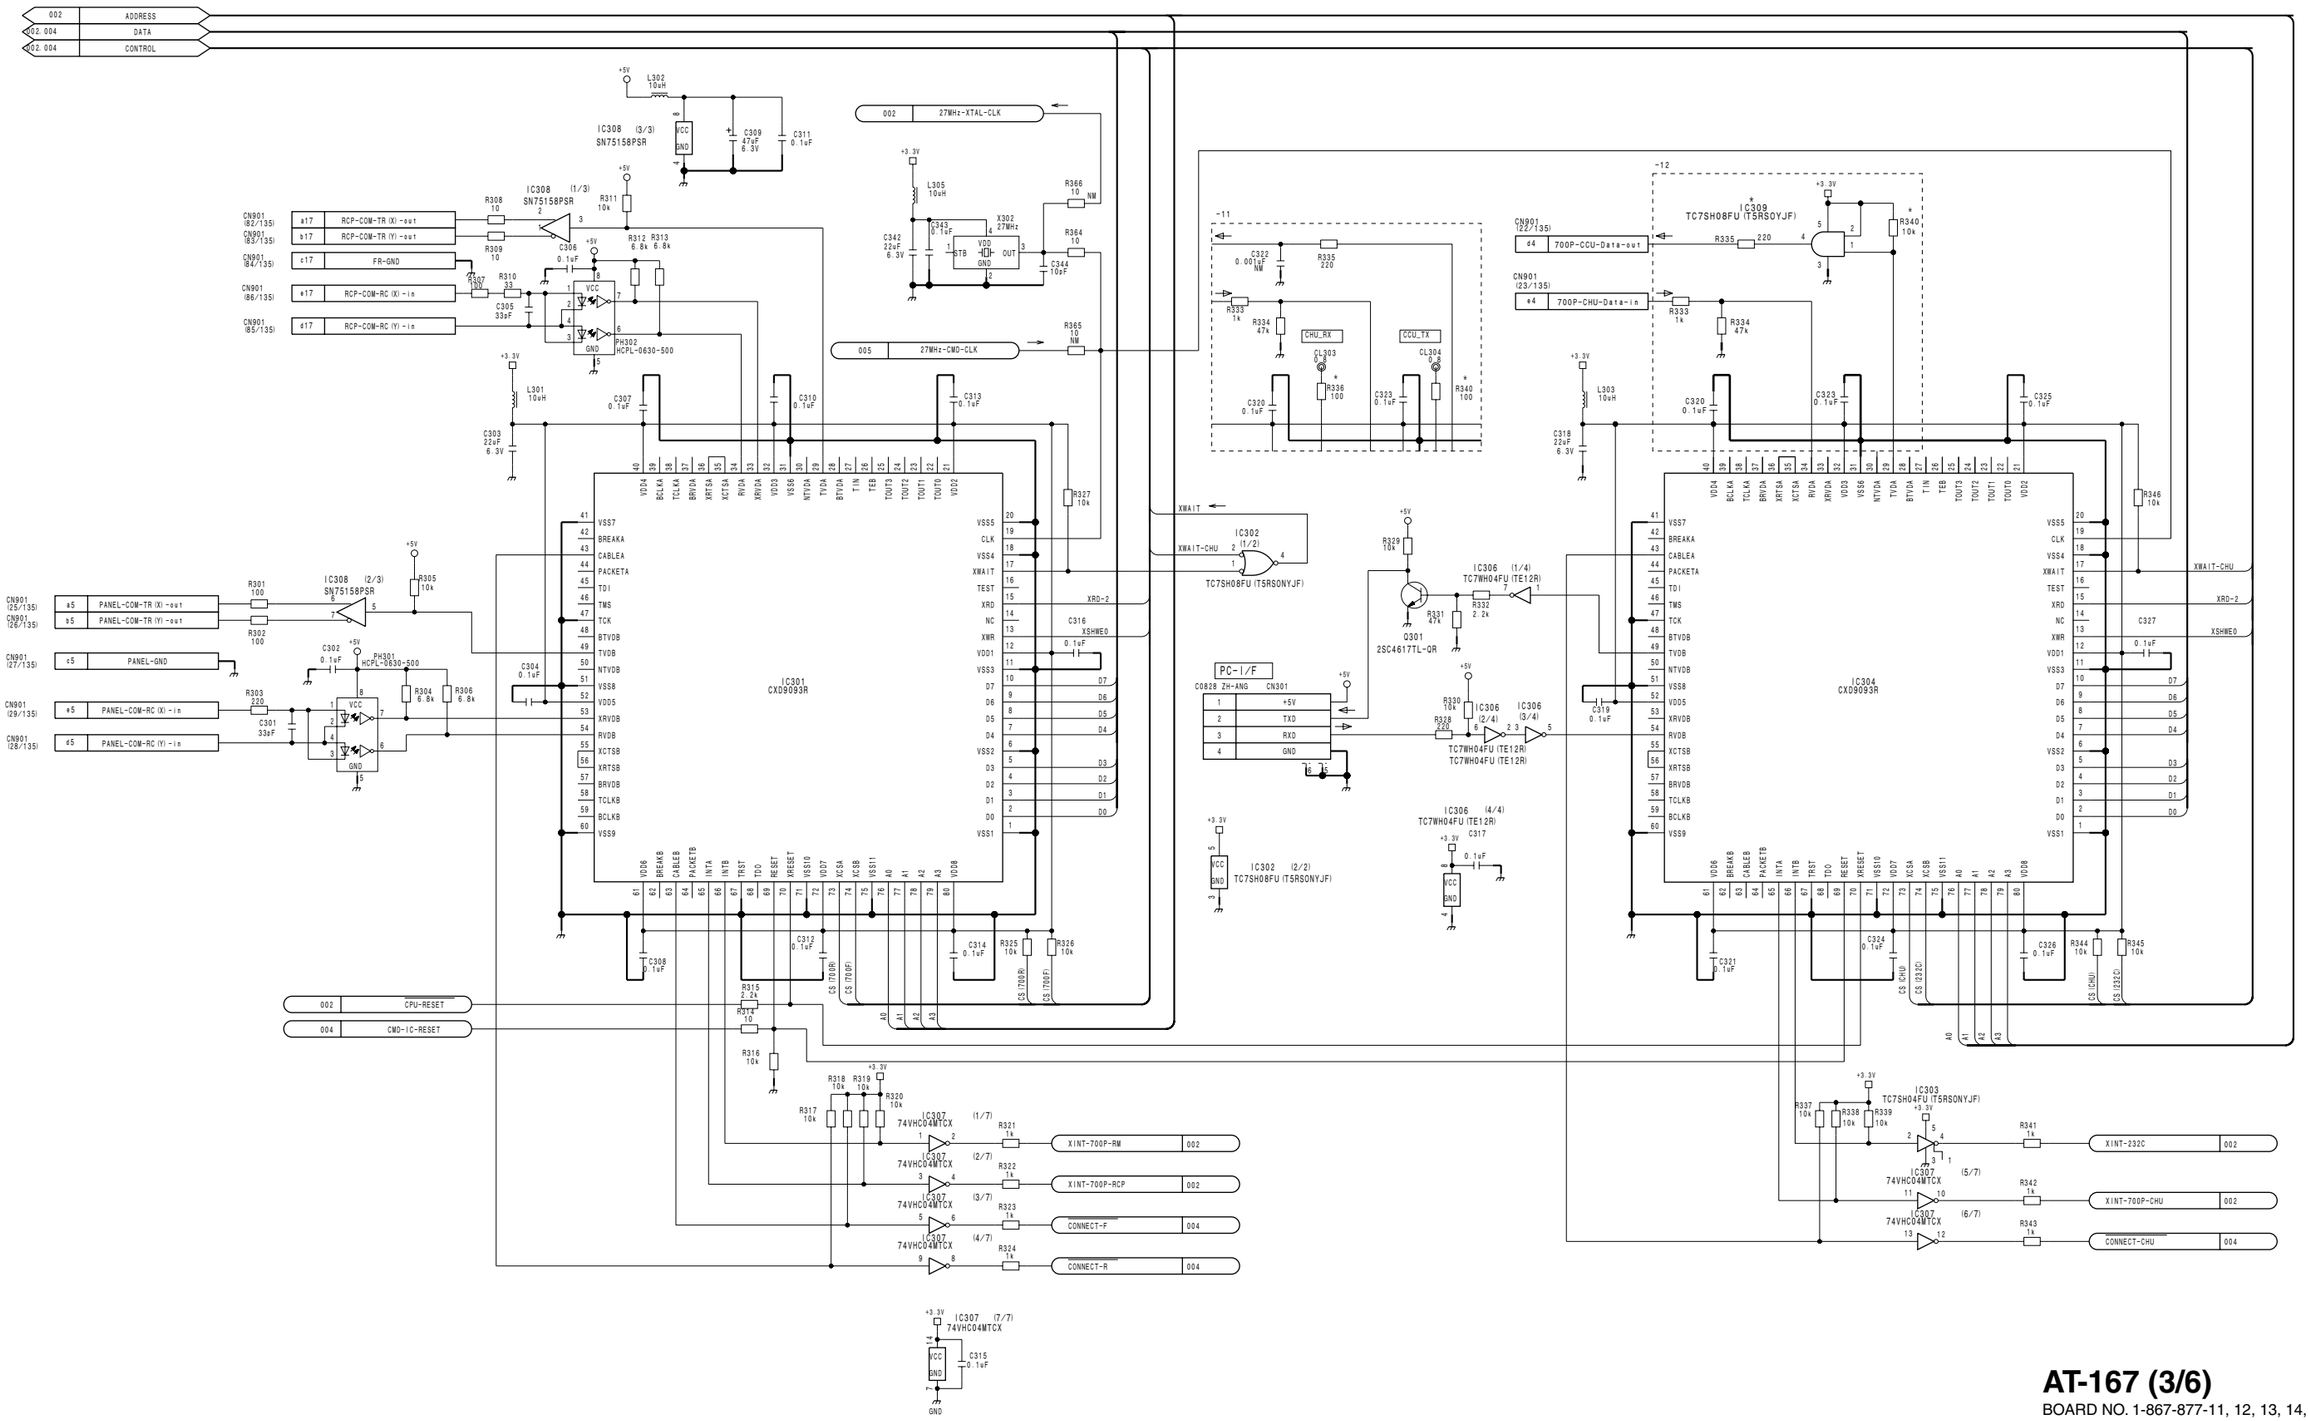

AT-167 (3/6)
BOARD NO. 1-867-877-11, 12, 13, 14, 31
HDCU1000_AT-167_011_3

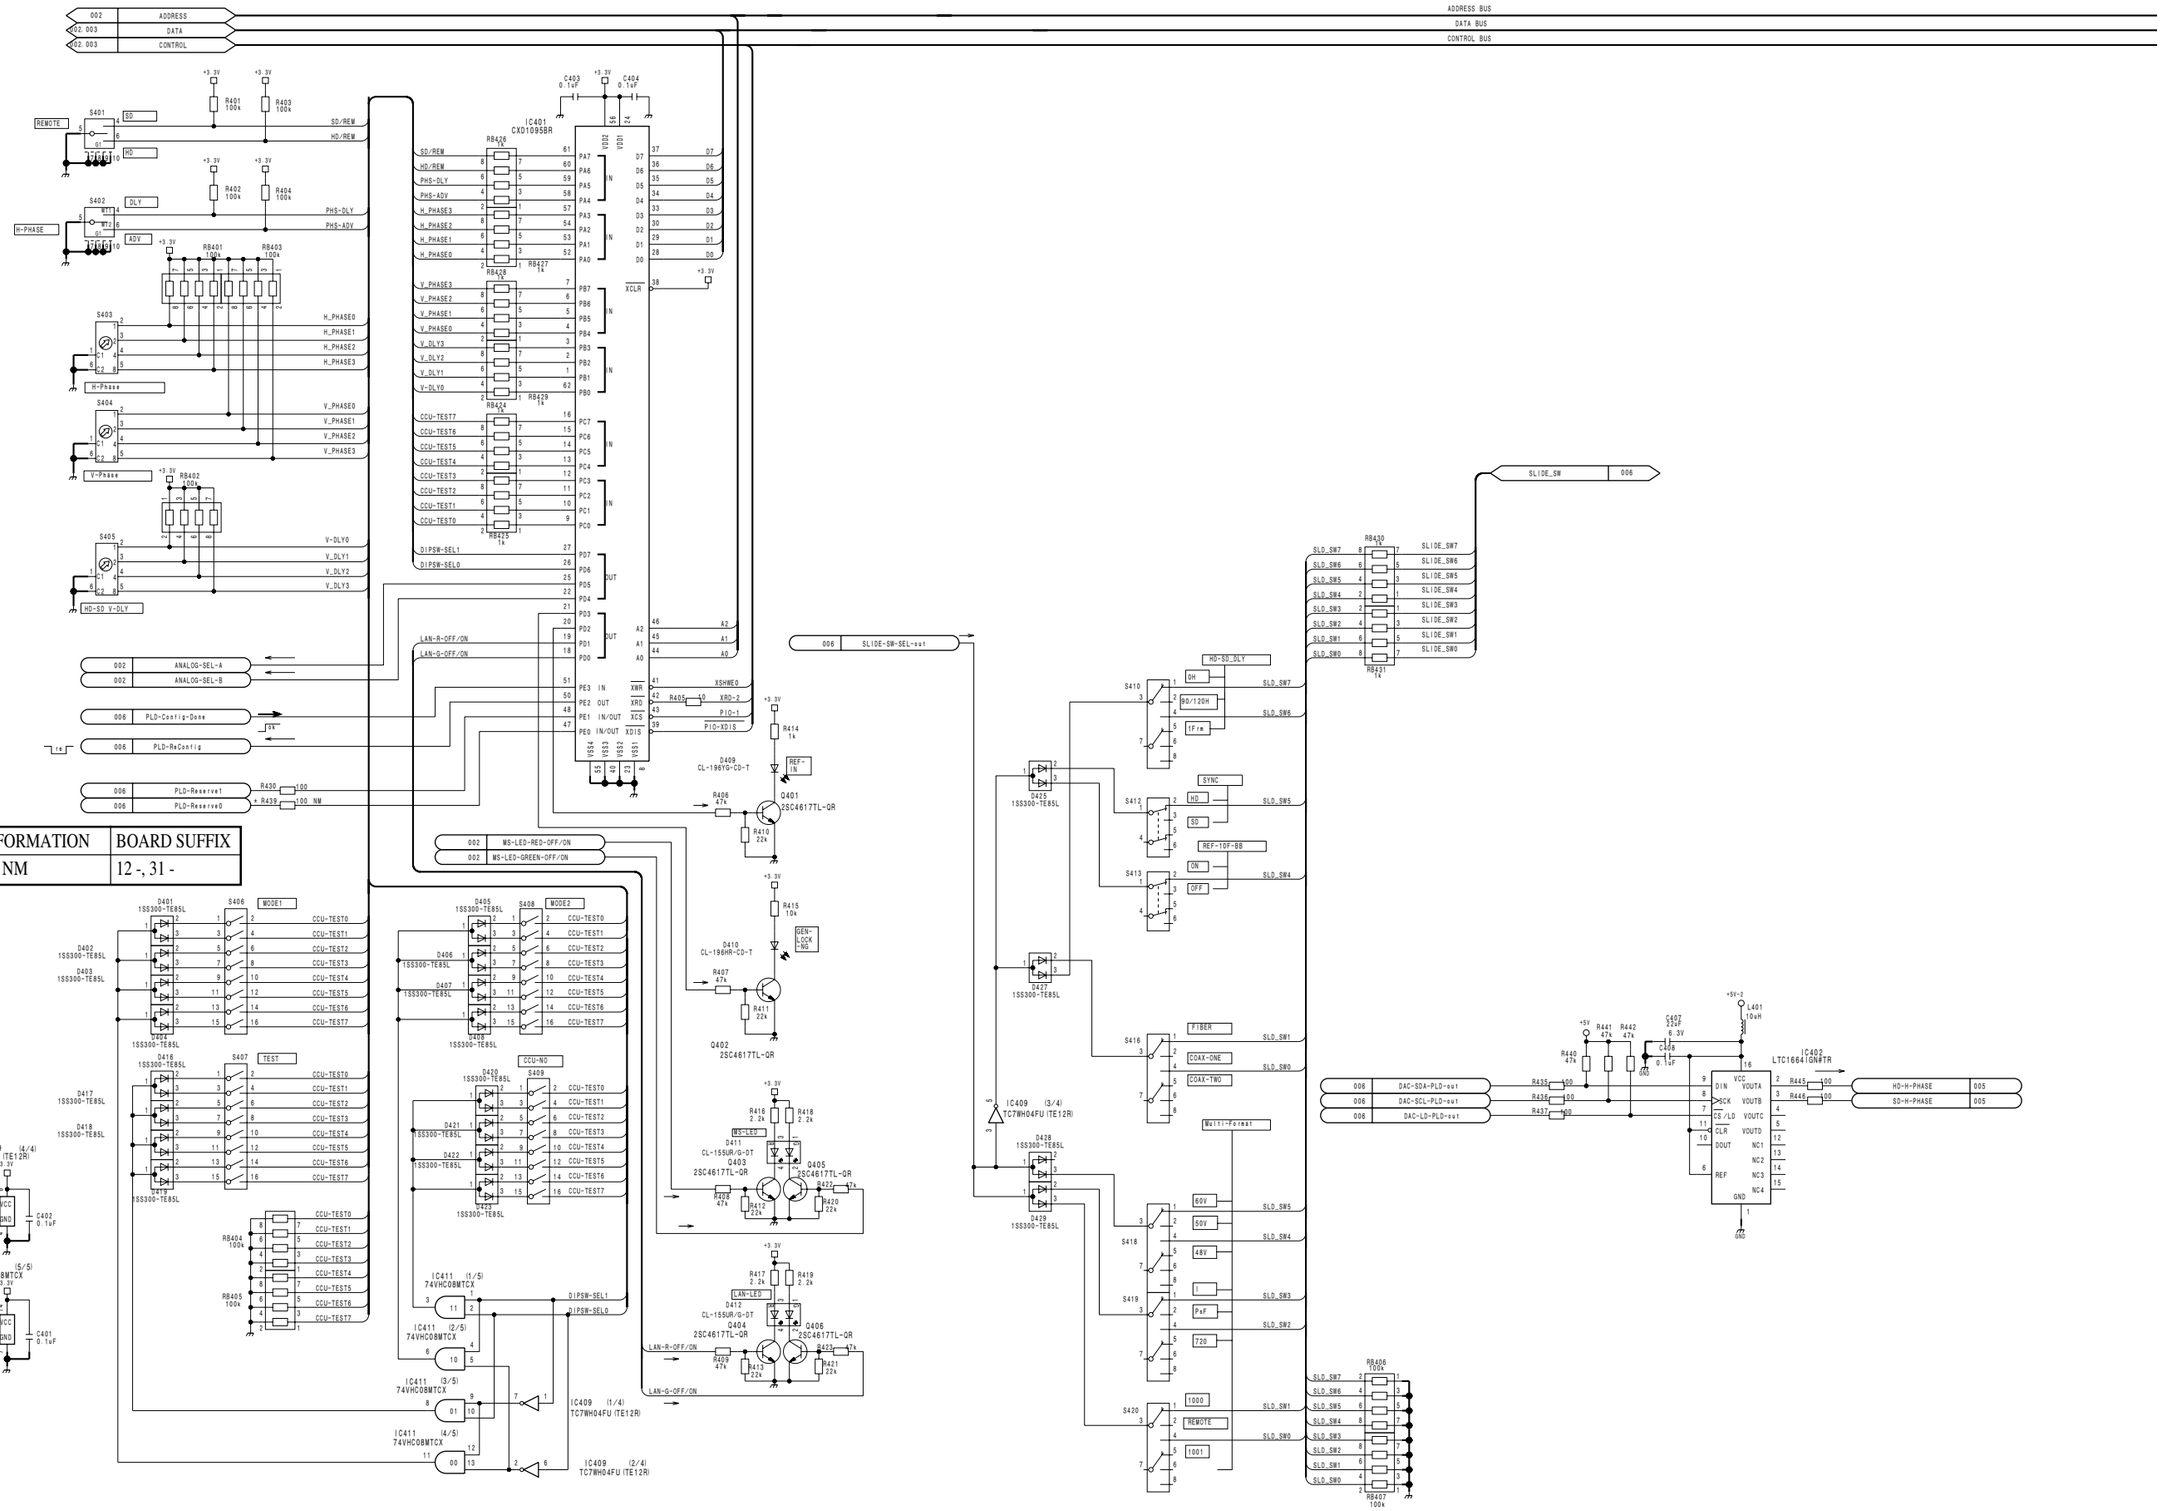

MARK	CHANGED INFORMATION	BOARD SUFFIX
*	R439 100 → NM	12 -, 31 -

AT-167 (4/6)
SUFFIX: -11, -12, -13, -14, -31

MARK	CHANGED INFORMATION	BOARD SUFFIX
*	RB423 100k → 10k	13 -, 31 -
	R506 100k → 10k	
	R507 100k → 10k	
	R508 100k → 10k	
	C350, C351, C352, C353,	
	C354, C355, C356 → ADDED	
	R523 → ADDED	14 -

MARK	CHANGED INFORMATION	BOARD SUFFIX
*	R349 470 → 1k	12 -, 31 -
	R350 470 → 220	
	R464 NM → 100k	
	R465 0 → NM	

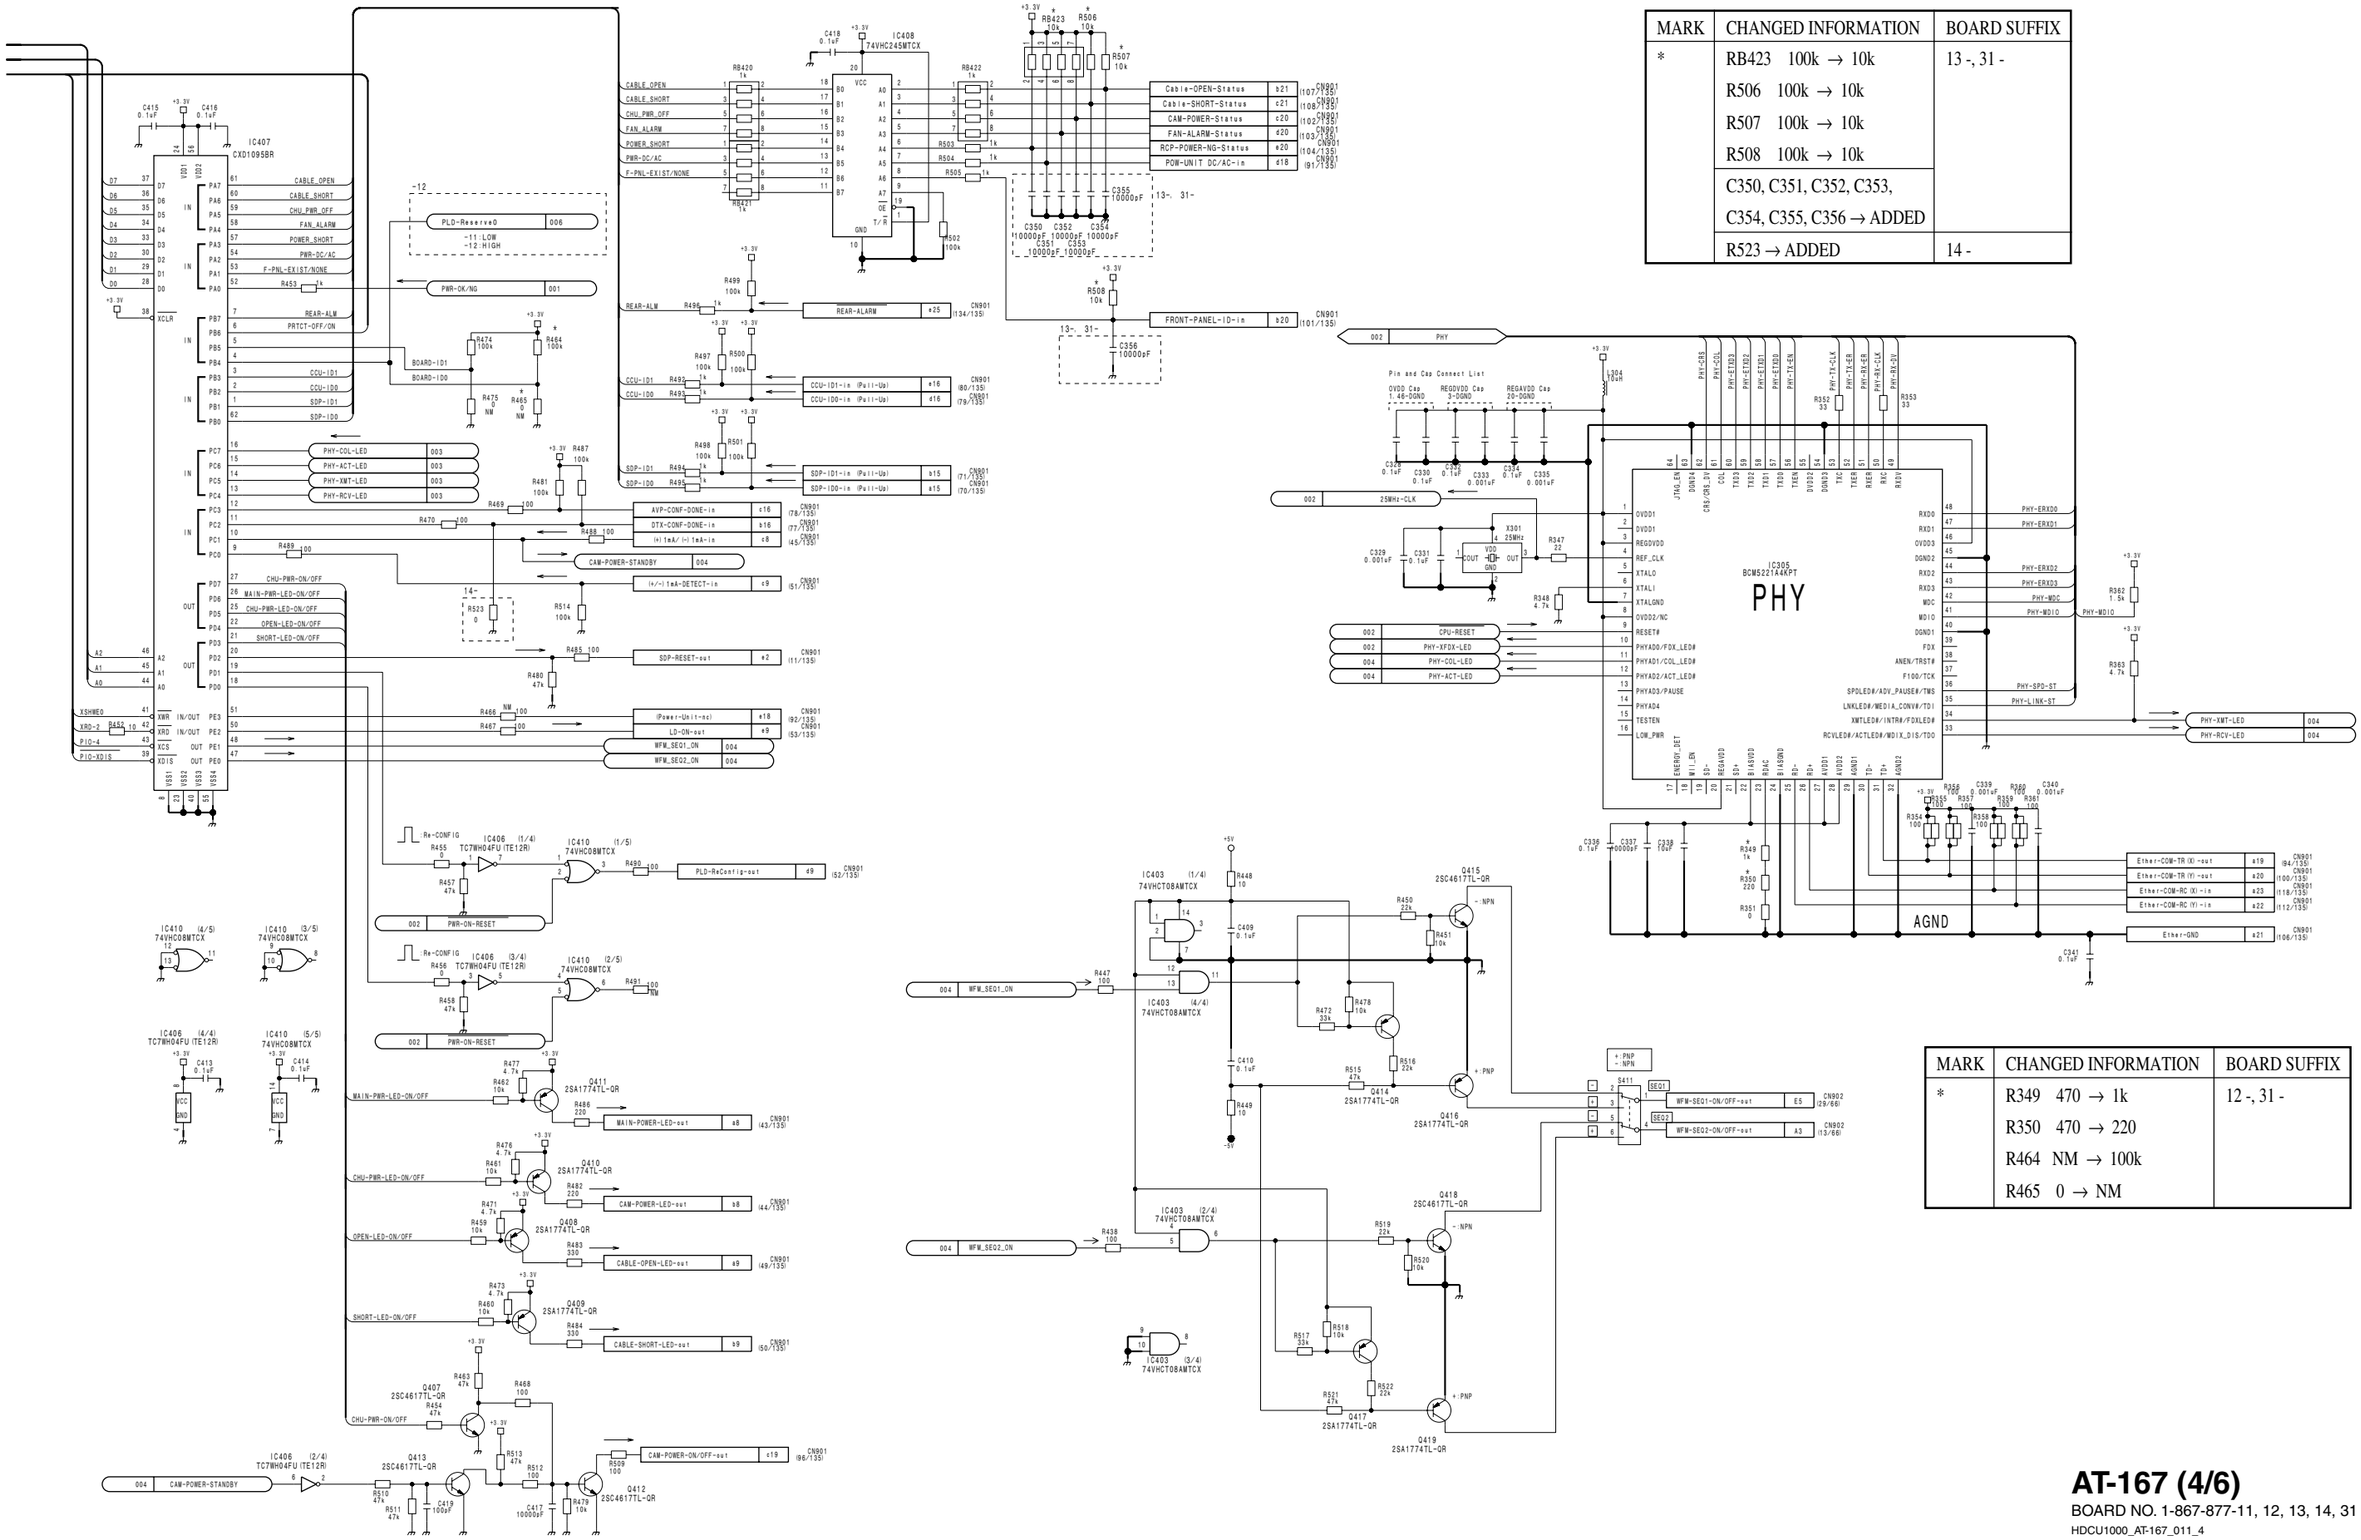

AT-167 (4/6)
BOARD NO. 1-867-877-11, 12, 13, 14, 31
HDCU1000_AT-167_011_4

AT-167 (5/6)
SUFFIX: -11, -12, -13, -14, -31

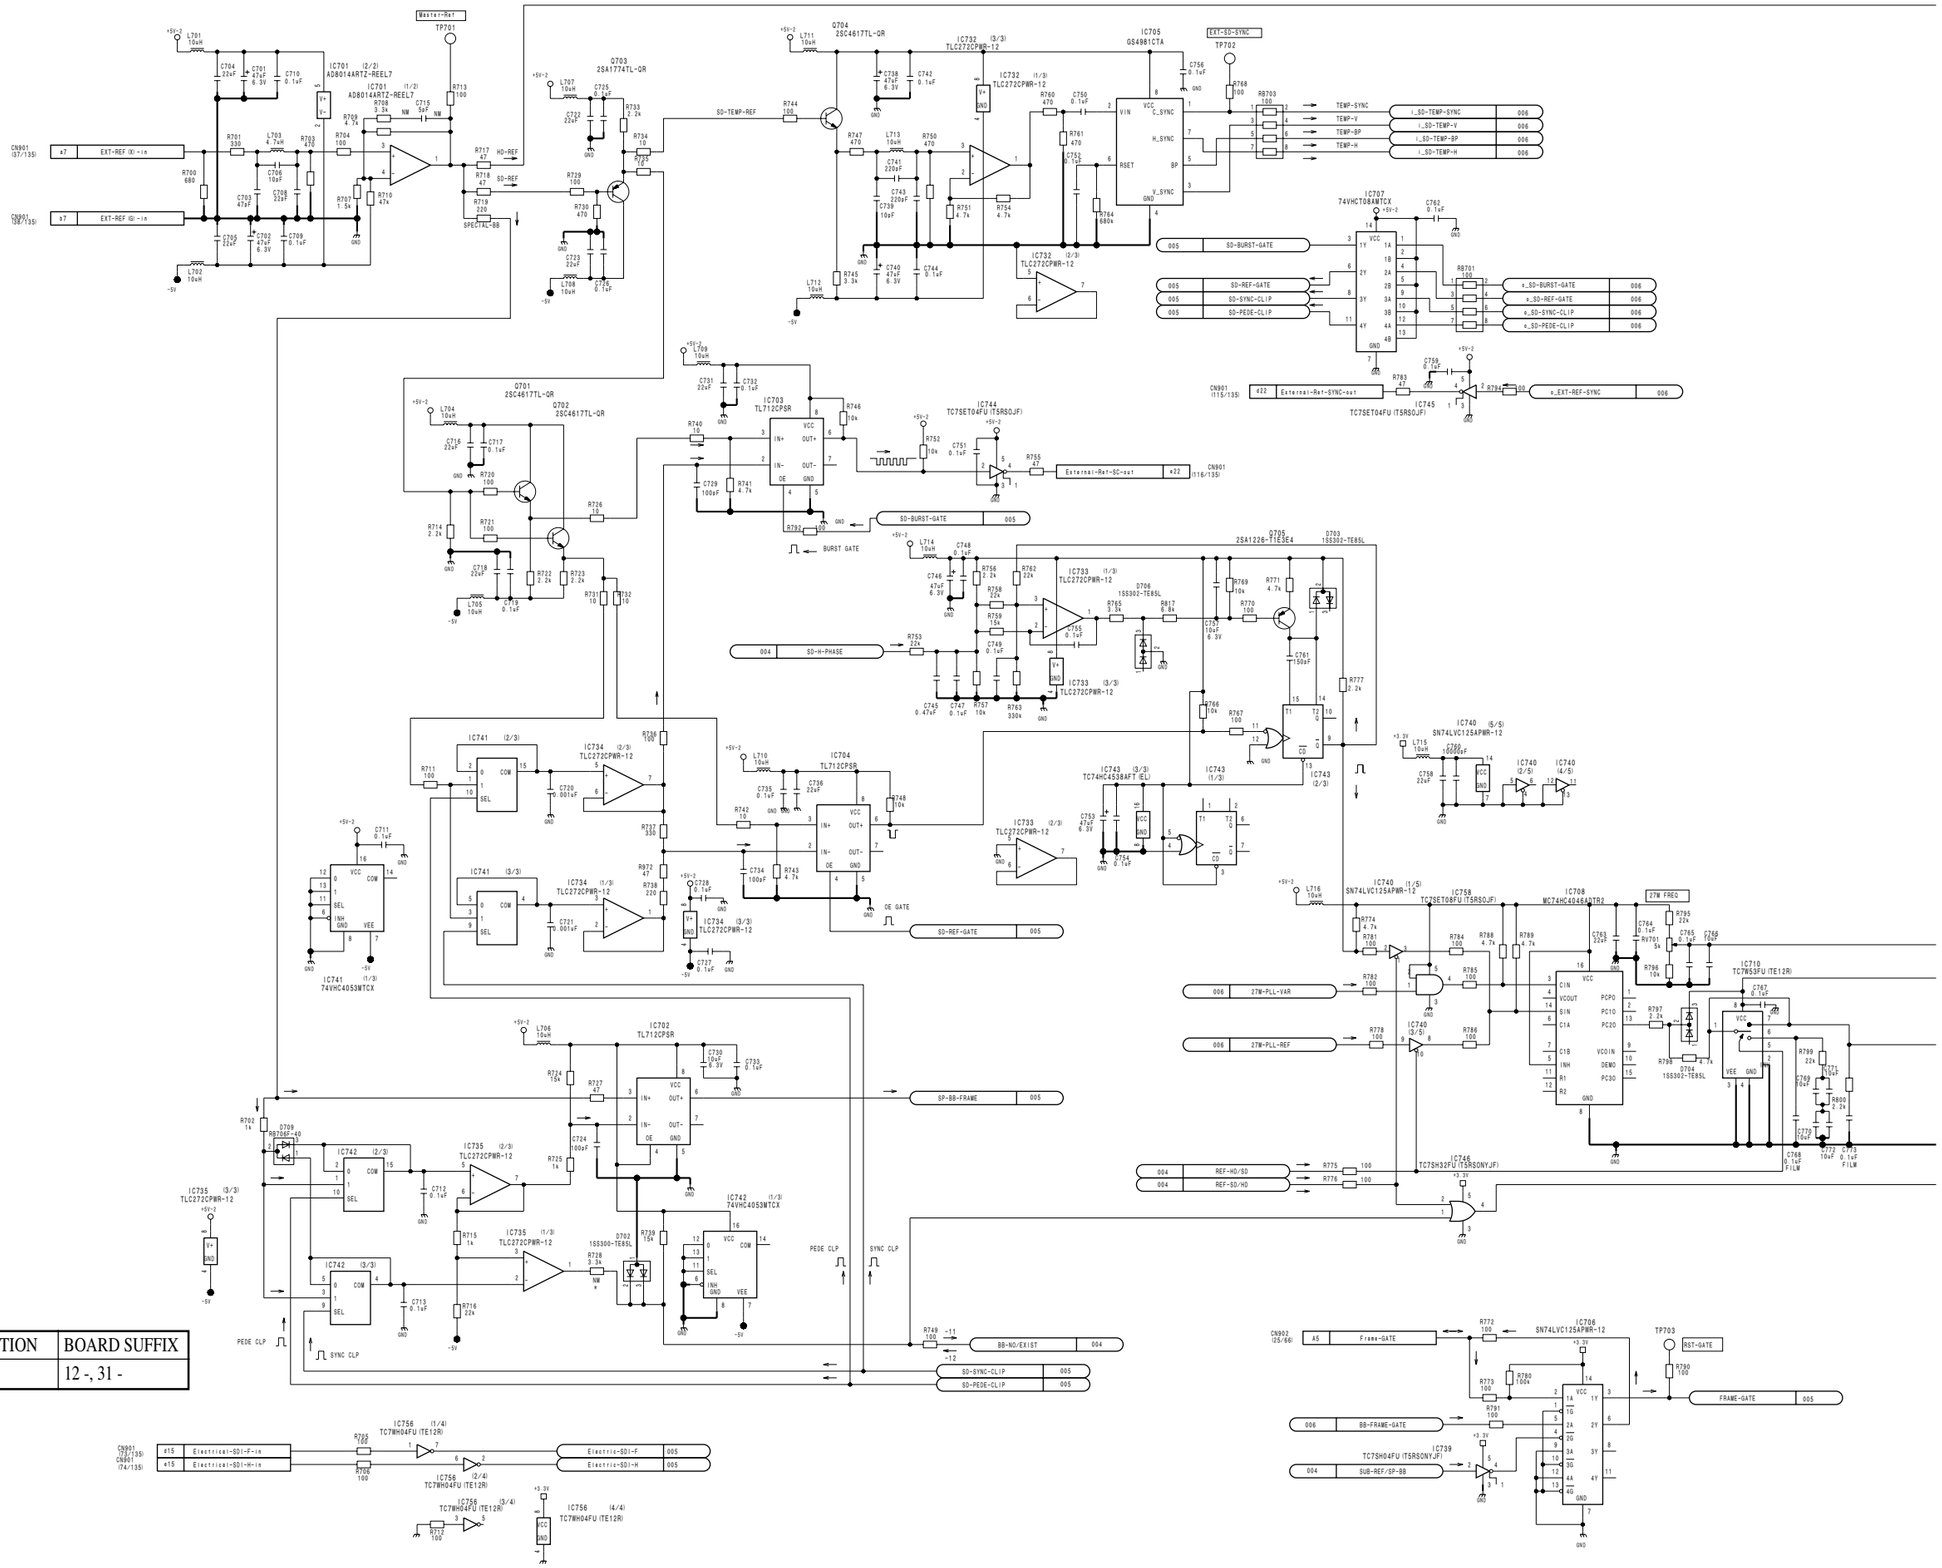

MARK	CHANGED INFORMATION	BOARD SUFFIX
*	R728 3.3k → NM	12 -, 31 -

AT-167 (5/6)

SUFFIX: -11, -12, -13, -14, -31

AT-167 (5/6)

SUFFIX: -11, -12, -13, -14, -31

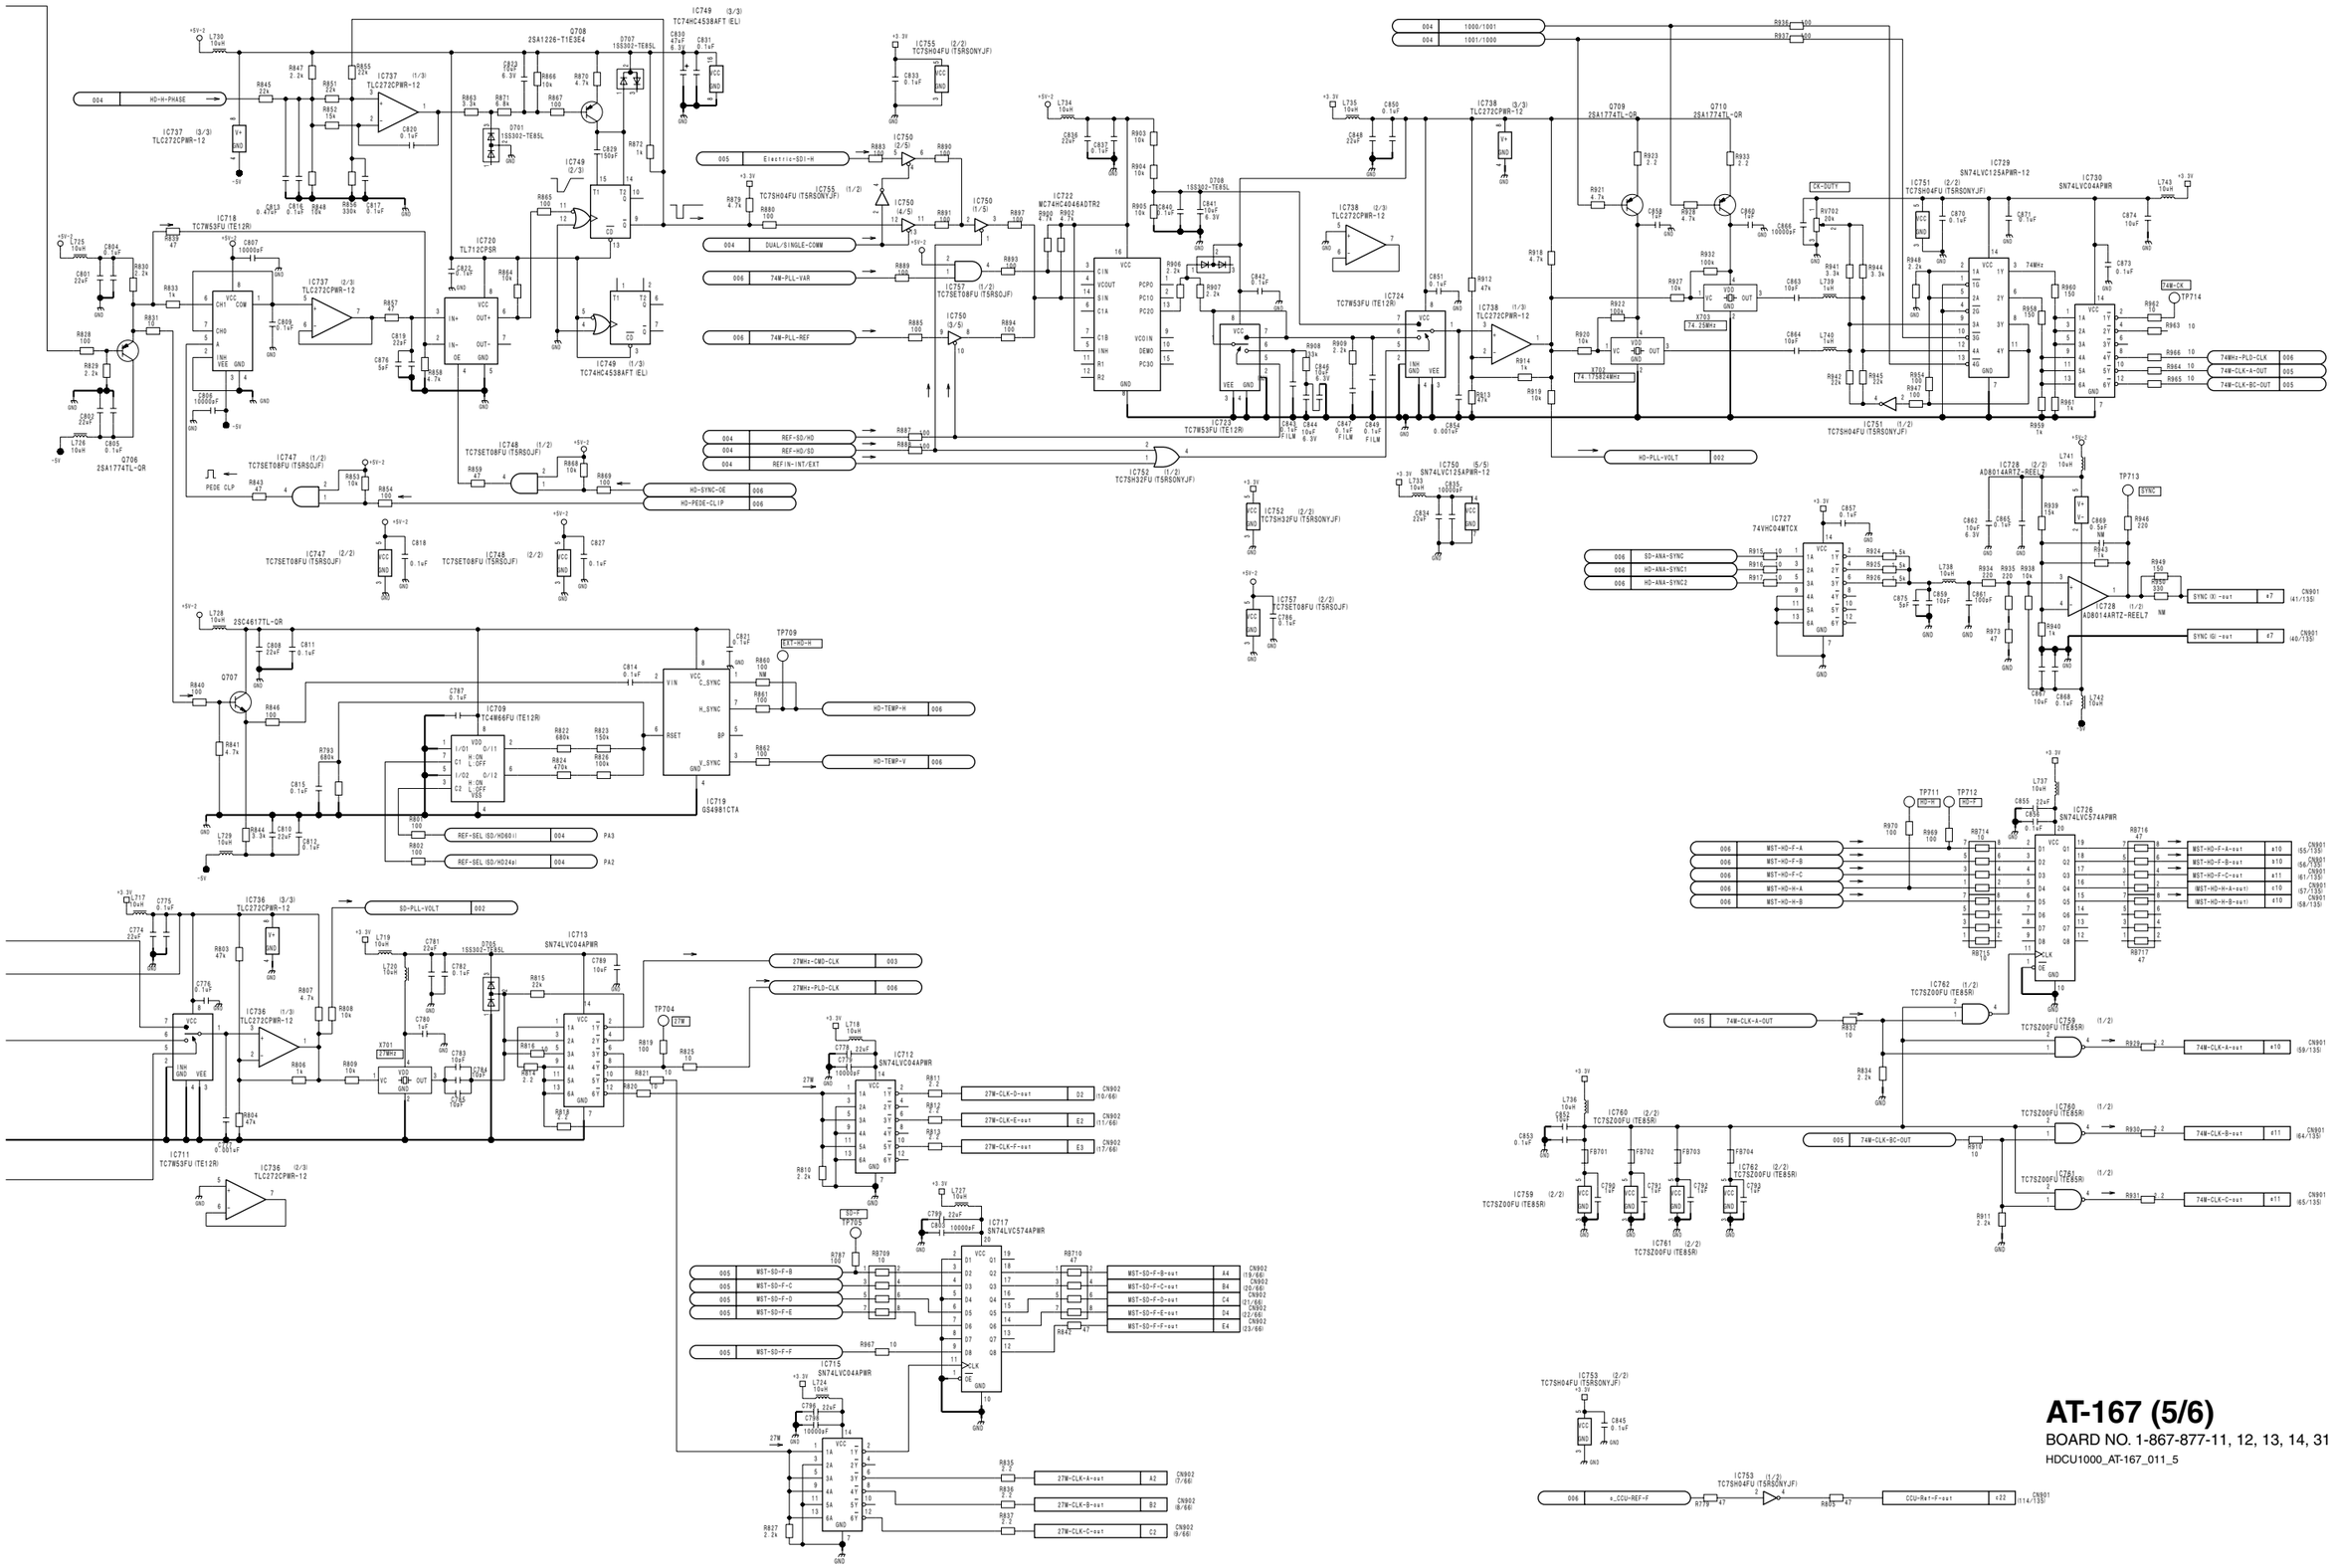

AT-167 (5/6)

BOARD NO. 1-867-877-11, 12, 13, 14, 31

HDCU1000_AT-167_011_5

AT-167 (6/6)
SUFFIX: -11, -12, -13, -14, -31

7-12

AT-167 (6/6)

BOARD NO. 1-867-877-11, 12, 13, 14, 31

HDCU1000_AT-167_011_6

MM/HDCU1000 Series

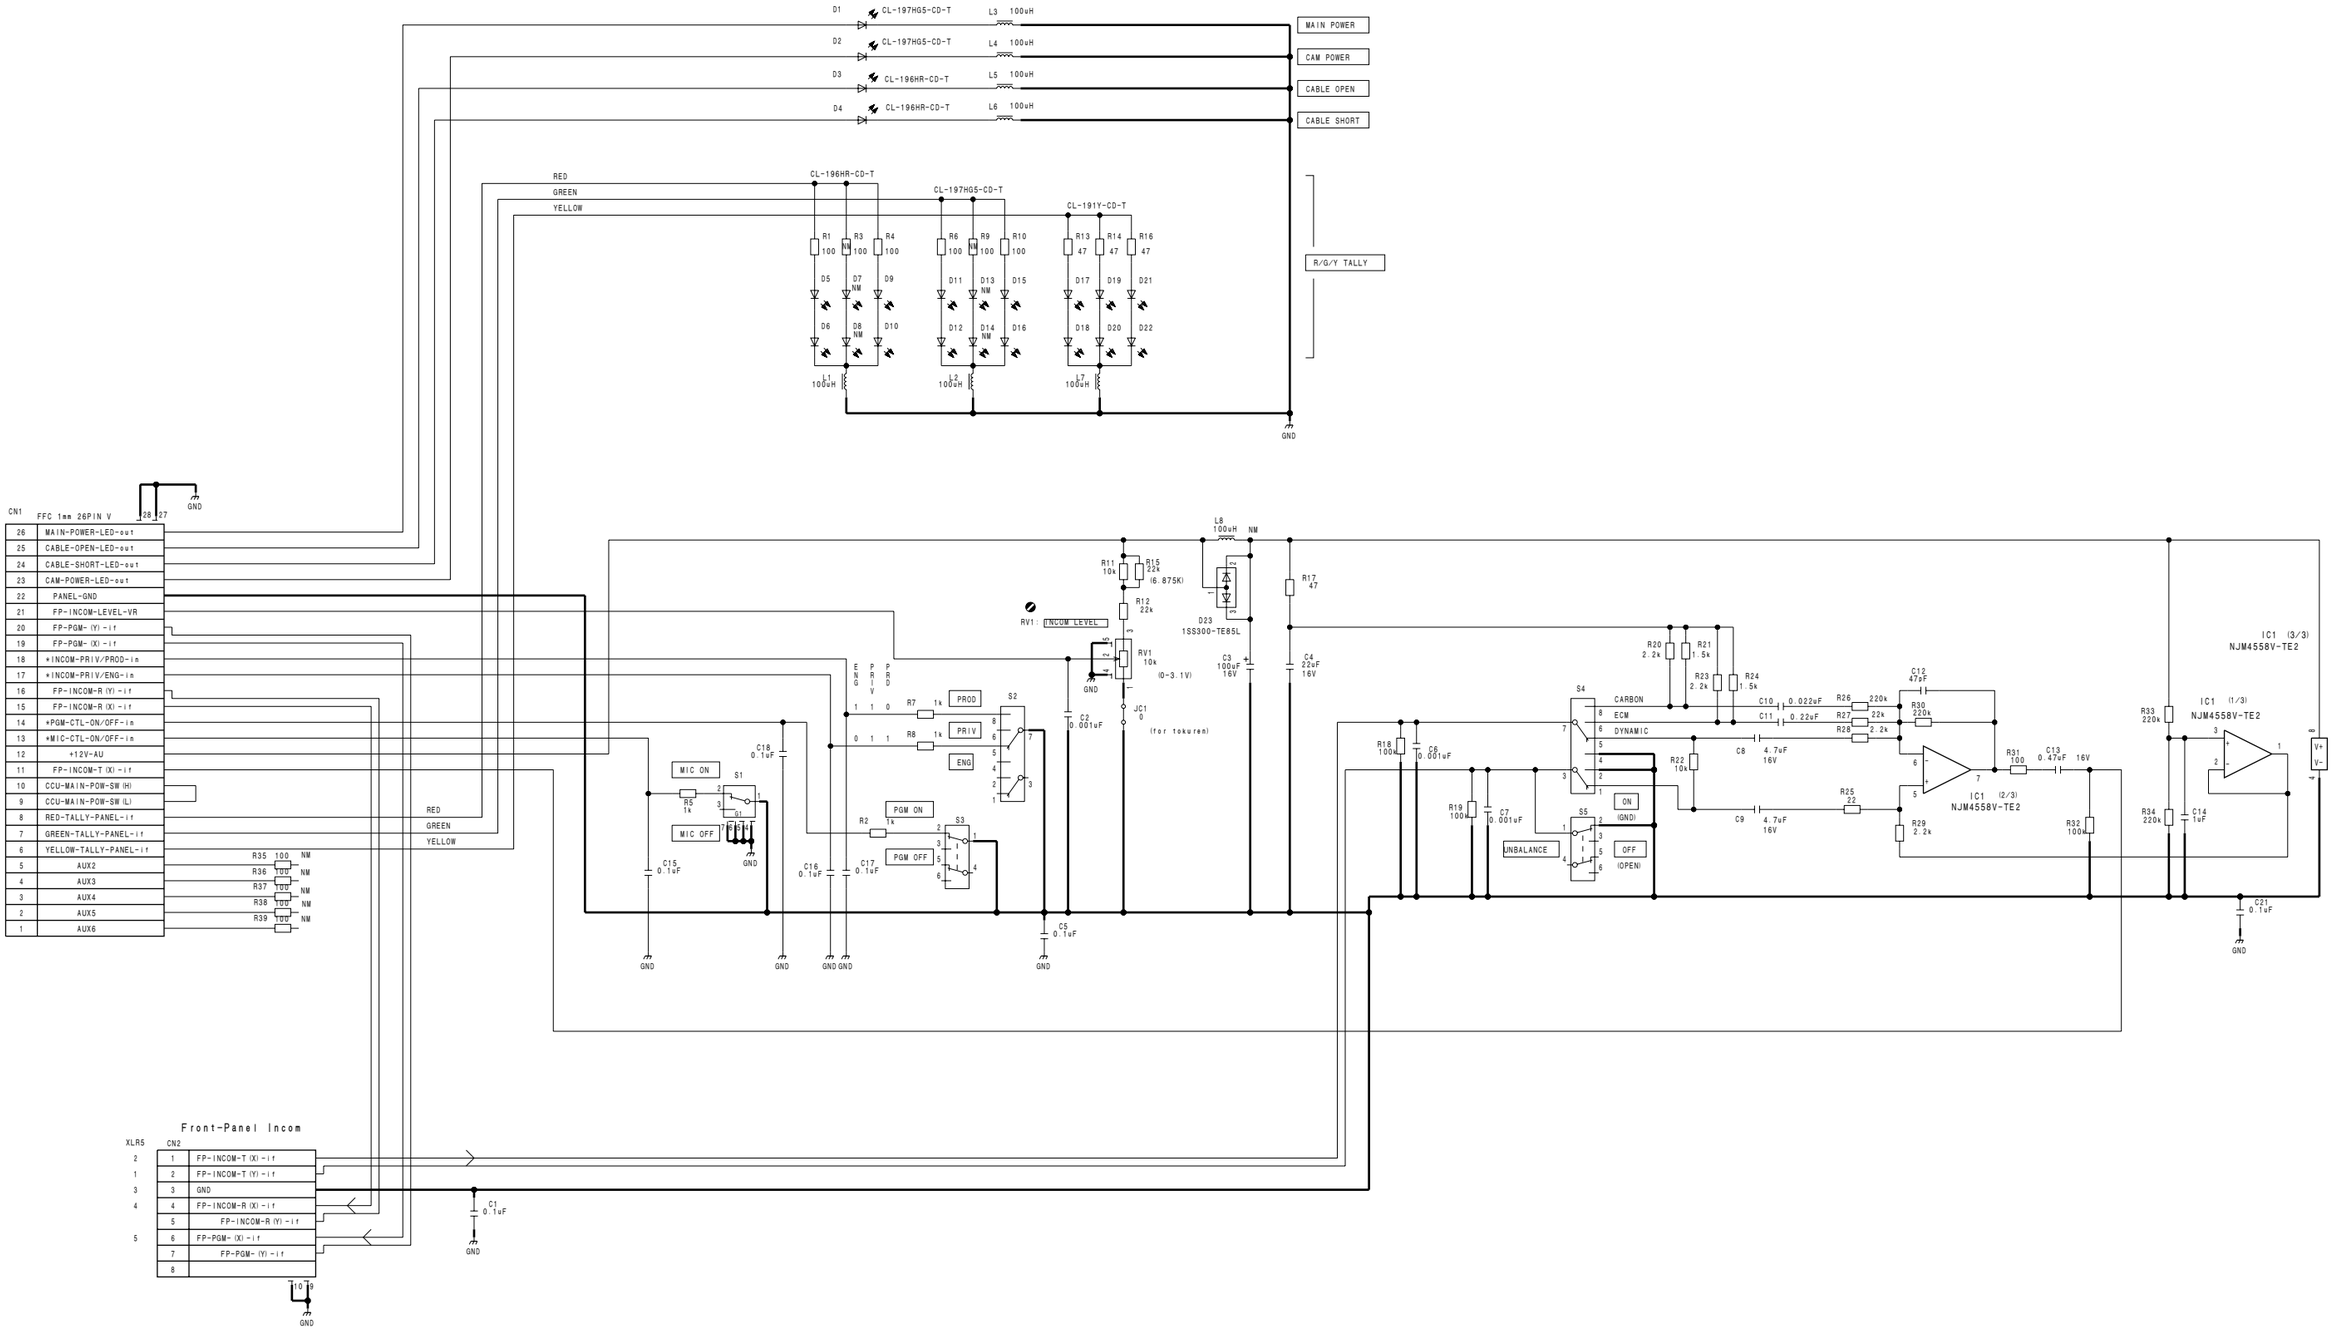

AU-302
BOARD NO. 1-867-884-12
HDCU1000_AU-302_012_1

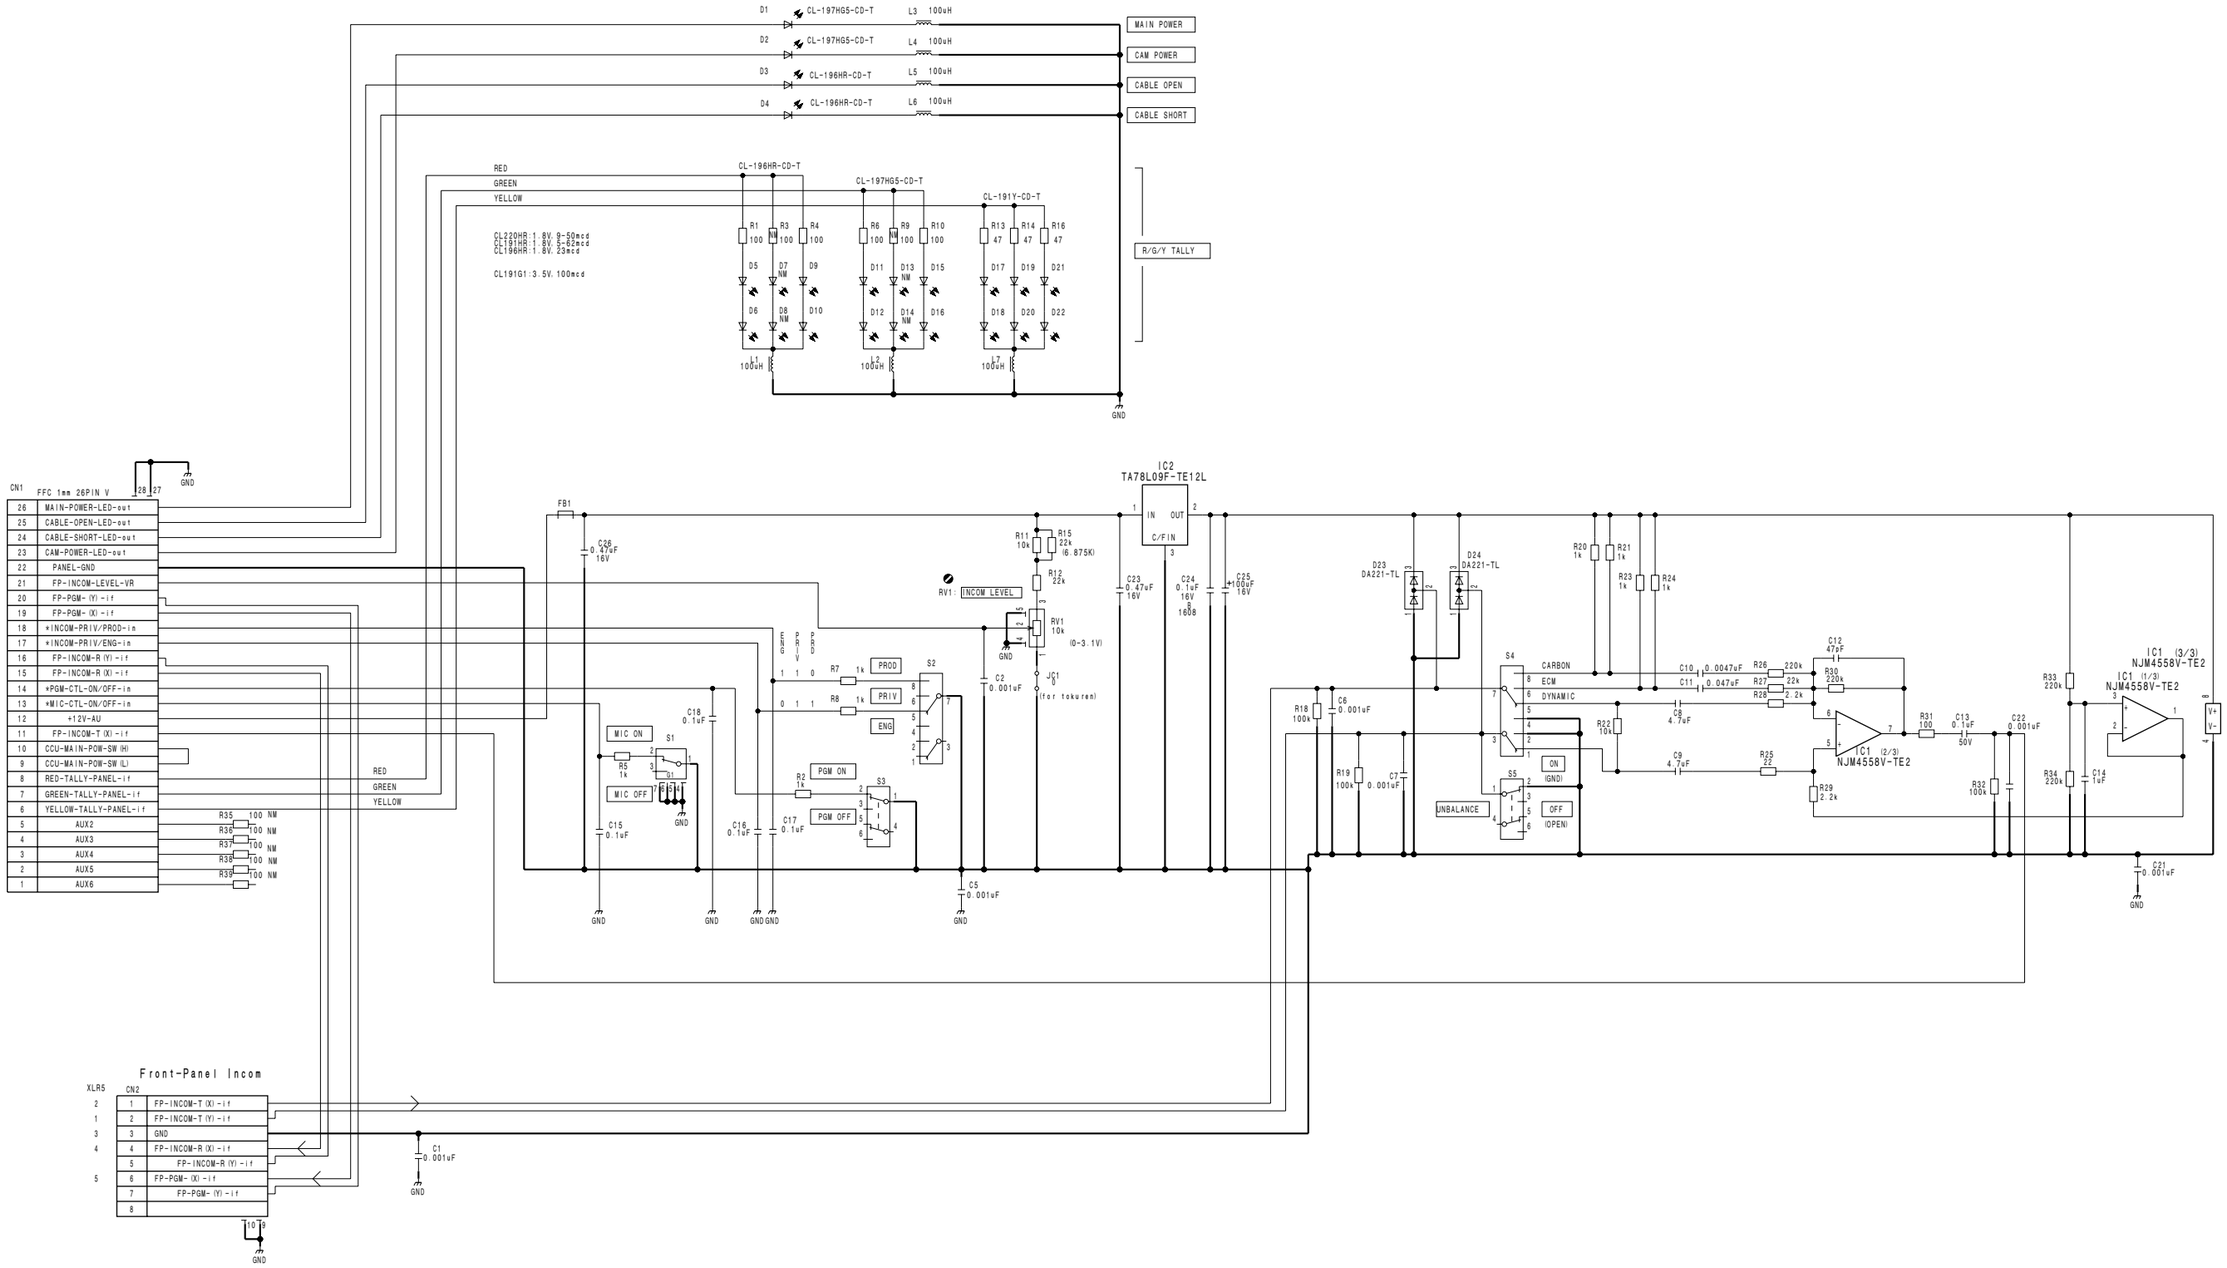

AU-302
BOARD NO. 1-867-884-13
HDCU1000_AU-302_013_1

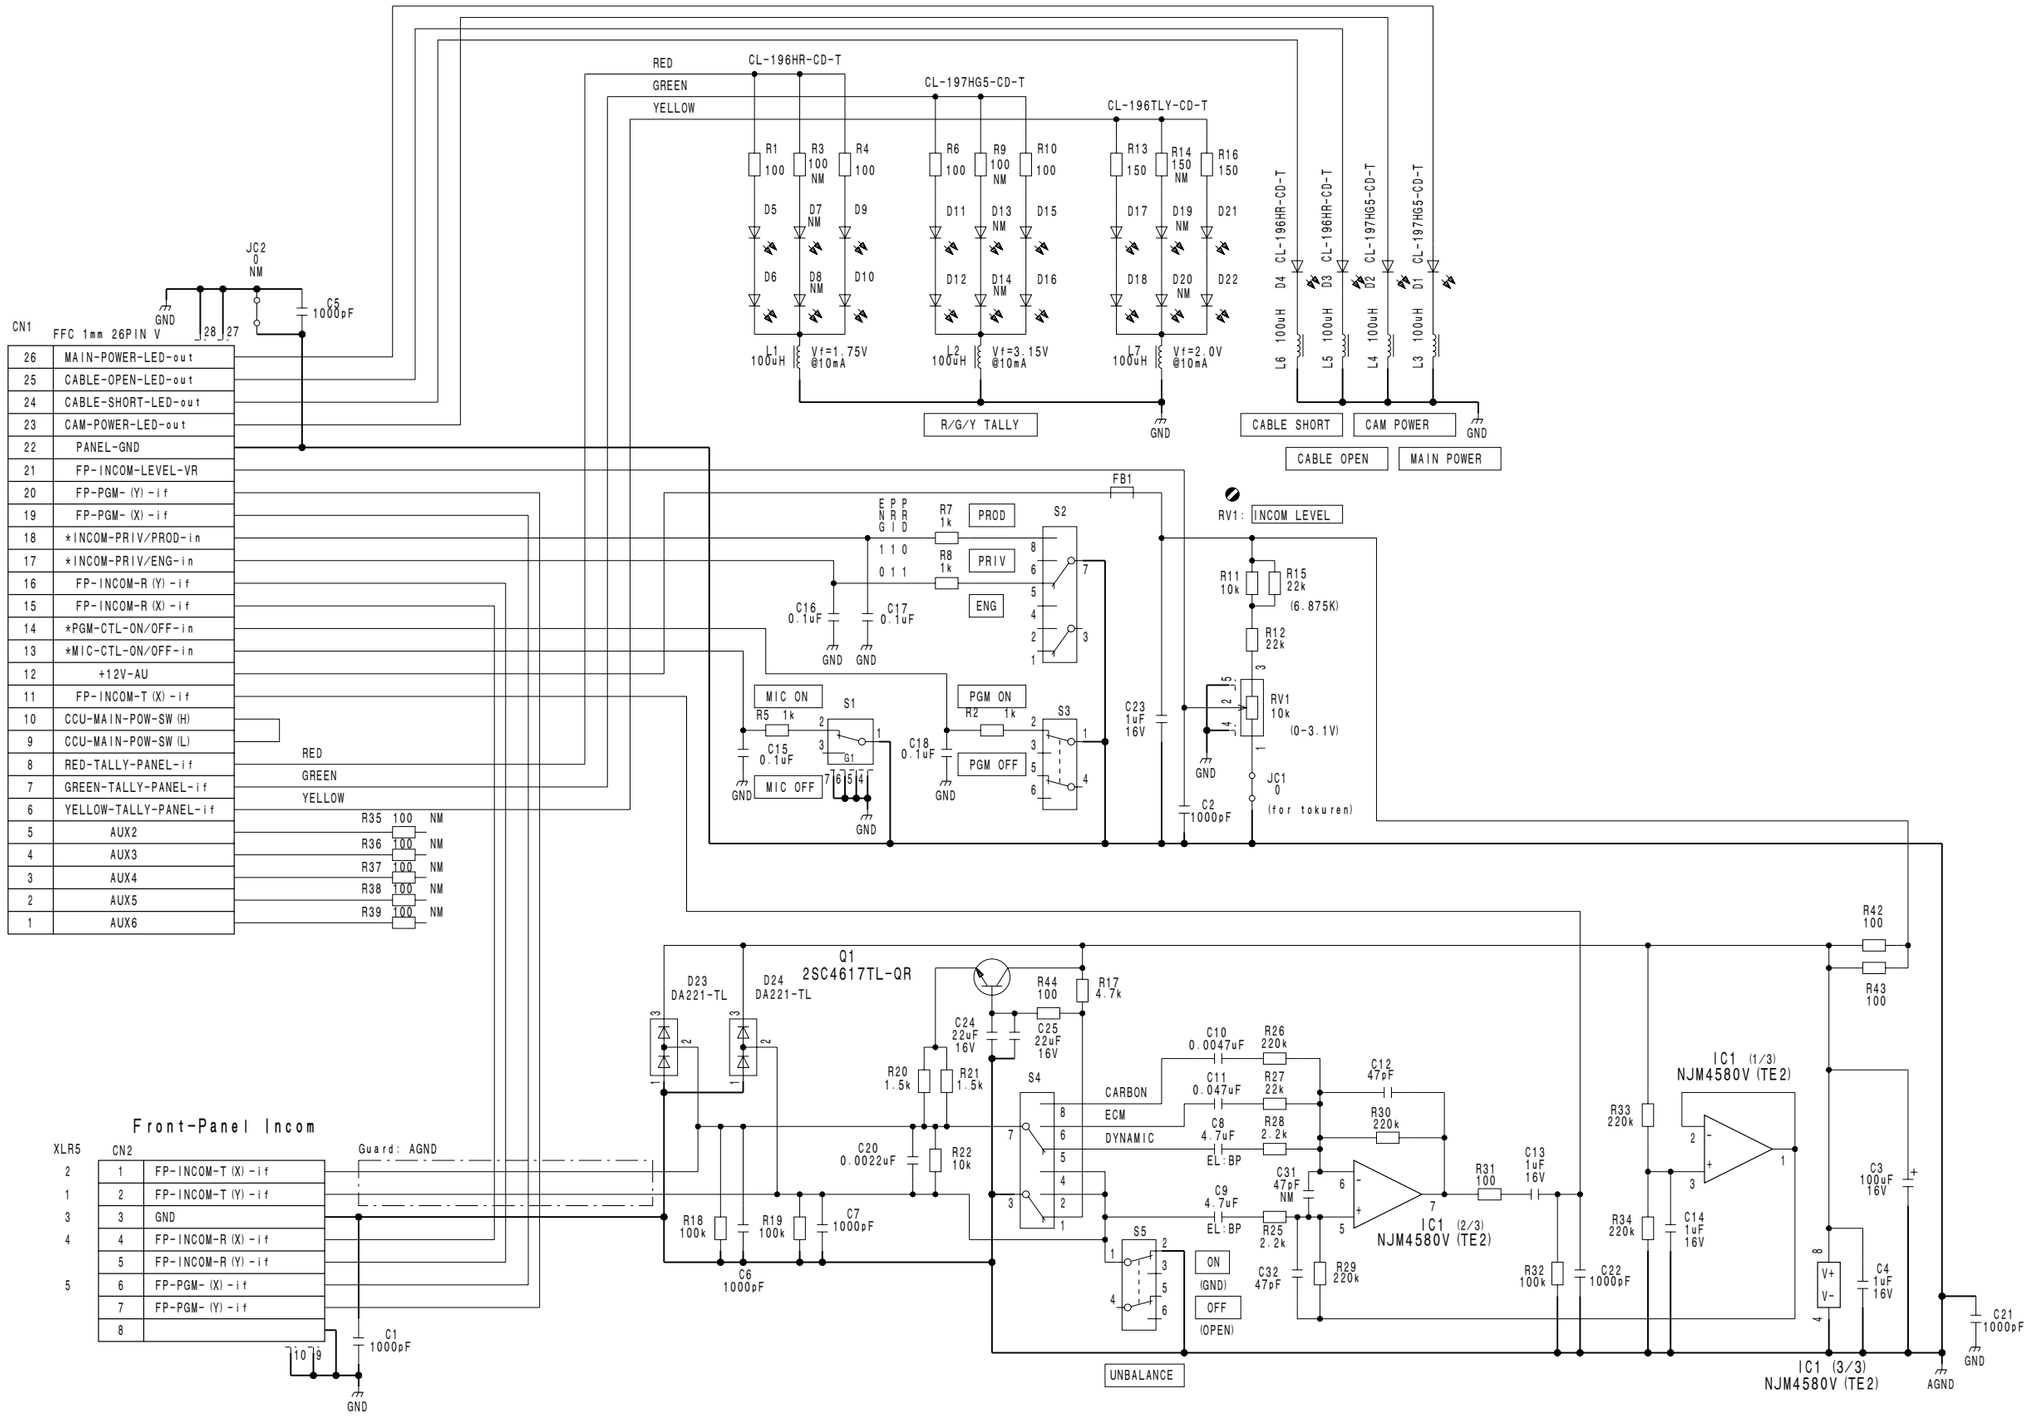

AU-302
BOARD NO. 1-867-884-14, 31
HDCU1000_AU-302_014_1

from/to RM-B750

CN4

1	HD VIDEO IN
2	HD VIDEO GND
3	DA-GND
4	DA-R
5	DA-G
6	DA-B
7	DA-GND
8	BOARD-ID
9	SD-GND
10	SD-R
11	SD-G
12	SD-B
13	SD-GND
14	SD-HSYNC
15	SD-VSYNC
16	SD-GND
17	SD/HD
18	SYNC IN/OUT
19	NTSC/PAL
20	INPOSE-PLUSE
21	CABLE-DATA0
22	CABLE-DATA1
23	+5V
24	+5V
25	+12V
26	+12V
27	-5V
28	GND
29	GND
30	GND

CN3

1	(spare)
2	PANEL-GND
3	RM-PANEL-COM-RC (X) -in
4	RM-PANEL-COM-RC (Y) -in
5	RM-PANEL-COM-TR (X) -out
6	RM-PANEL-COM-TR (Y) -out
7	RM-PANEL-ID
8	RM-PANEL-UNREG_30V
9	RM-PANEL-UNREG_30V
10	RM-PANEL-UNREG-GND
11	RM-PANEL-UNREG-GND
12	(spare)

(ID2904. 12P. AN. Lower)

JC1 0 NM
JC3 0
JC2 0 NM
S1 NM
(Right) ON
(Left) OFF
PANEL POWER SW
MAIN POWER SW
S2
ON
OFF
C1 0.022uF NM
C2 0.022uF NM
C23 0.1uF
C29 0.1uF
C30 0.1uF
LP1

From/To MB

CN1

	45	GND
	44	GND
	43	
	42	RM-PANEL-UNREG_30V
	41	RM-PANEL-UNREG_30V
	40	
	39	CCU-MAIN-POWER-SW (C)
	38	CCU-MAIN-POWER-SW (H)
3.3V	37	MAIN-POWER-LED-out
3.3V	36	CAM-POWER-LED-out
3.3V	35	CABLE-OPEN-LED-out
3.3V	34	CABLE-SHORT-LED-out
	33	RM-PANEL-ID
	32	RM-PANEL-COM-Tx (Y) -out
	31	RM-PANEL-COM-Tx (X) -out
	30	PANEL-GND
	29	RM-PANEL-COM-Rx (Y) -in
	28	RM-PANEL-COM-Rx (X) -in
AT	27	+INCOM-PRIV/PROD-in
AT	26	+INCOM-PRIV/ENG-in
	25	FP-INCOM-LEVEL-VR
AVP	24	+PGM-CTL-ON/OFF-in
AT	23	+MIC-CTL-ON/OFF-in
	22	FP-PGM- (X) -if
	21	FP-PGM- (Y) -if
	20	FP-INCOM-R (X) -if
	19	FP-INCOM-R (Y) -if
	18	GND
	17	FP-INCOM-T (X) -if
	16	
	15	+12V-AU
	14	
	13	RM-R_o
	12	RM-R (G)
	11	RM-G_o
	10	RM-G (G)
	9	RM-B_o
	8	RM-B (G)
	7	
	6	RM-SDH_o
	5	RM-SDV_o
5V	4	RED---TALLY-PANEL-if
5V	3	GREEN-TALLY-PANEL-if
5V	2	YELLOW-TALLY-PANEL-if
	1	GND

(J6491. 45P. ST. Lower)

RED
GREEN
YELLOW

D4 CL-197HG5-CD-T L3 100uH
D5 CL-197HG5-CD-T L4 100uH
D6 CL-196HR-CD-T L5 100uH
D7 CL-196HR-CD-T L6 100uH
MAIN POWER
CAM POWER
CABLE OPEN
CABLE SHORT
R/G/Y TALLY
R5 330 R6 330 R9 330
R11 100 R12 100 R13 100
R14 100 R16 100 R34 100
L1 100uH L2 100uH L7 100uH
C7 0.1uF
L8 100uH NM
D16 1SS300-TE85L
R7 10k R10 22k
R8 22k (6.875K)
RV1: INCOM LEVEL
RV1 10k (0-3.1V)
JC4 0 (for tokuren)
HR:30mA
YG:25mA
Y:25mA
R15 47
C4 0.001uF
C5 100uF 16V
C6 22uF 16V
C21 0.1uF
C22 0.1uF
R1 1k
R2 1k
R3 1k
R4 1k
S3
S4
PROD
PRIV
ENG
MIC ON
MIC OFF
PGM
C25 0.1uF
C26 0.1uF
C27 0.1uF
C28 0.1uF
R17 100k
C8 0.001uF
R18 100k
C9 0.001uF
S5 (1/2)
S5 (2/2)
CARBON
ECM
DYNAMIC
S6
Unbalance
ON
OFF
(OPEN)
(GND)
R19 2.2k
R20 1.5k
R22 2.2k
R23 1.5k
R21 10k
C17 470pF NM
C12 0.022uF
C13 0.22uF
C10 4.7uF 16V
C11 4.7uF 16V
R26 220k
R27 22k
R24 2.2k
C14 47pF
R29 220k
R25 22
R28 2.2k
R35 100k NM
R30 100
C15 0.47uF 16V
R31 100k
IC1 (3/3) NJM4558V-TE2
IC1 (2/3) NJM4558V-TE2
IC1 (1/3) NJM4558V-TE2
R32 220k
R33 220k
C16 1uF
C24 0.1uF

Front-Panel Incom

XLR5 CN2

1	1	FP-INCOM-T (X) -if
2	2	FP-INCOM-T (Y) -if
3	3	GND
4	4	FP-INCOM-R (X) -if
	5	FP-INCOM-R (Y) -if
5	6	FP-PGM- (X) -if
	7	FP-PGM- (Y) -if
	8	

C3 0.1uF

AU-303G
BOARD NO. 1-867-895-21
HDCU1500_AU-303G_021_1

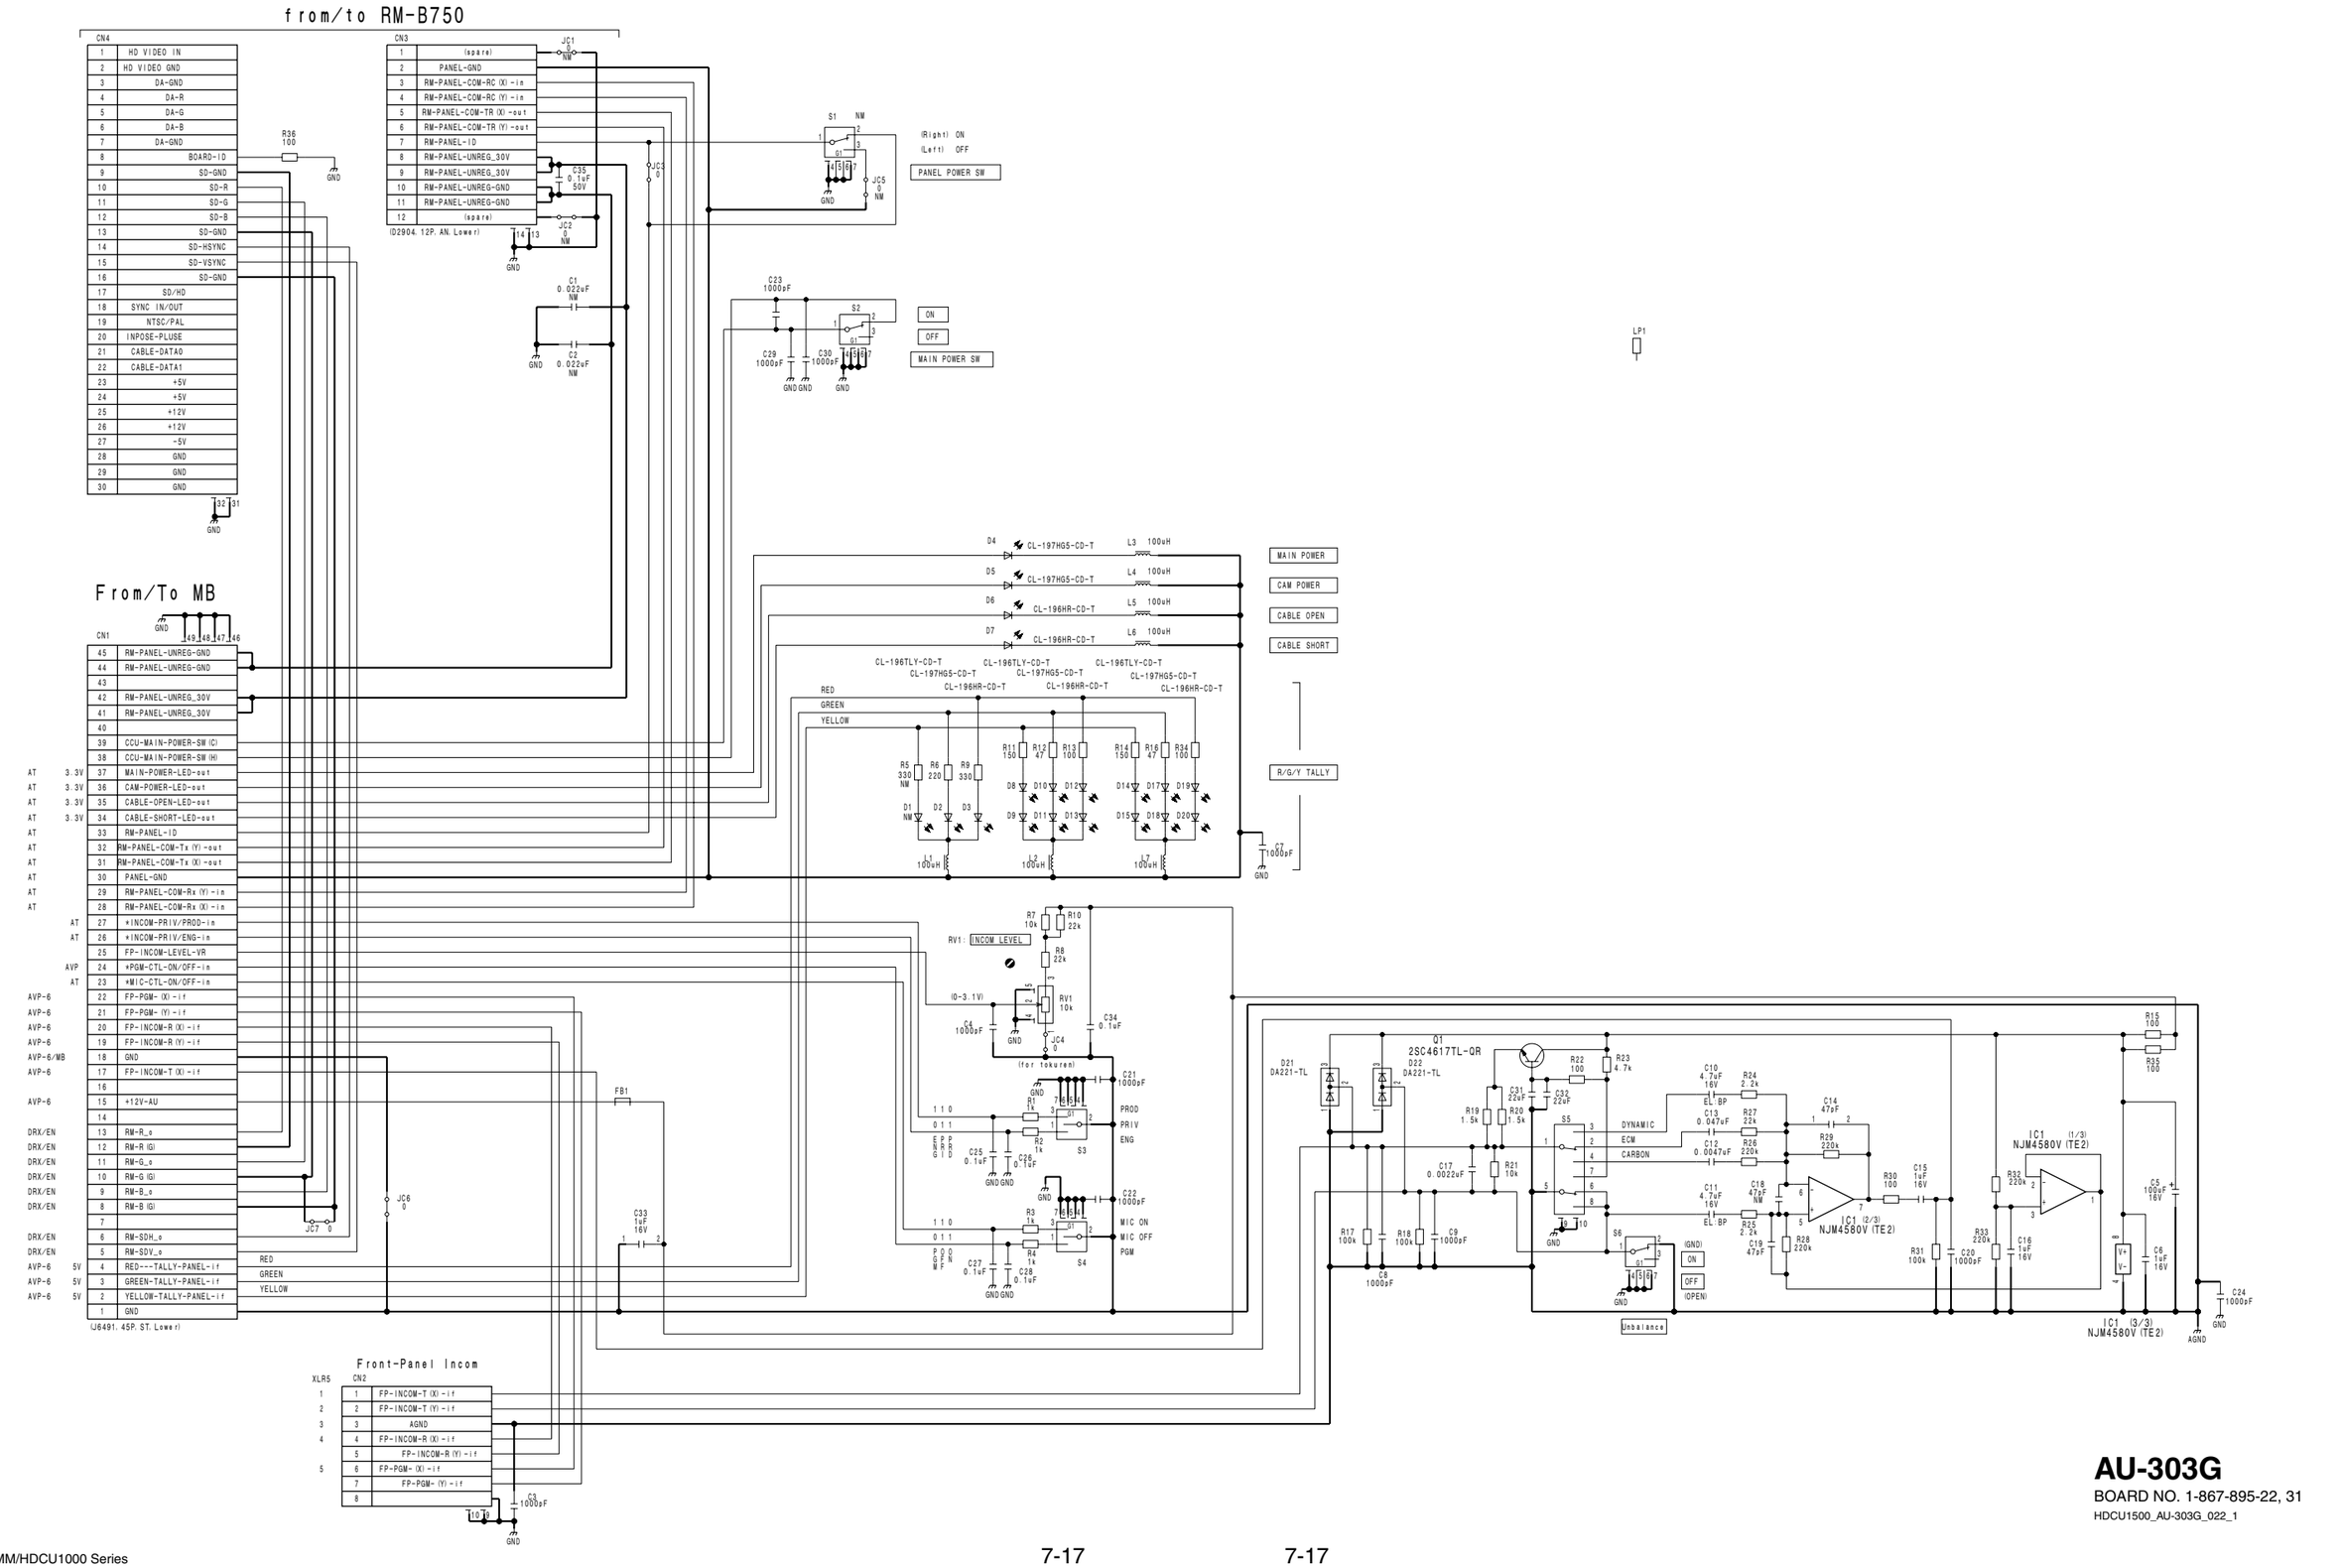

AU-303G
BOARD NO. 1-867-895-22, 31
HDCU1500_AU-303G_022_1

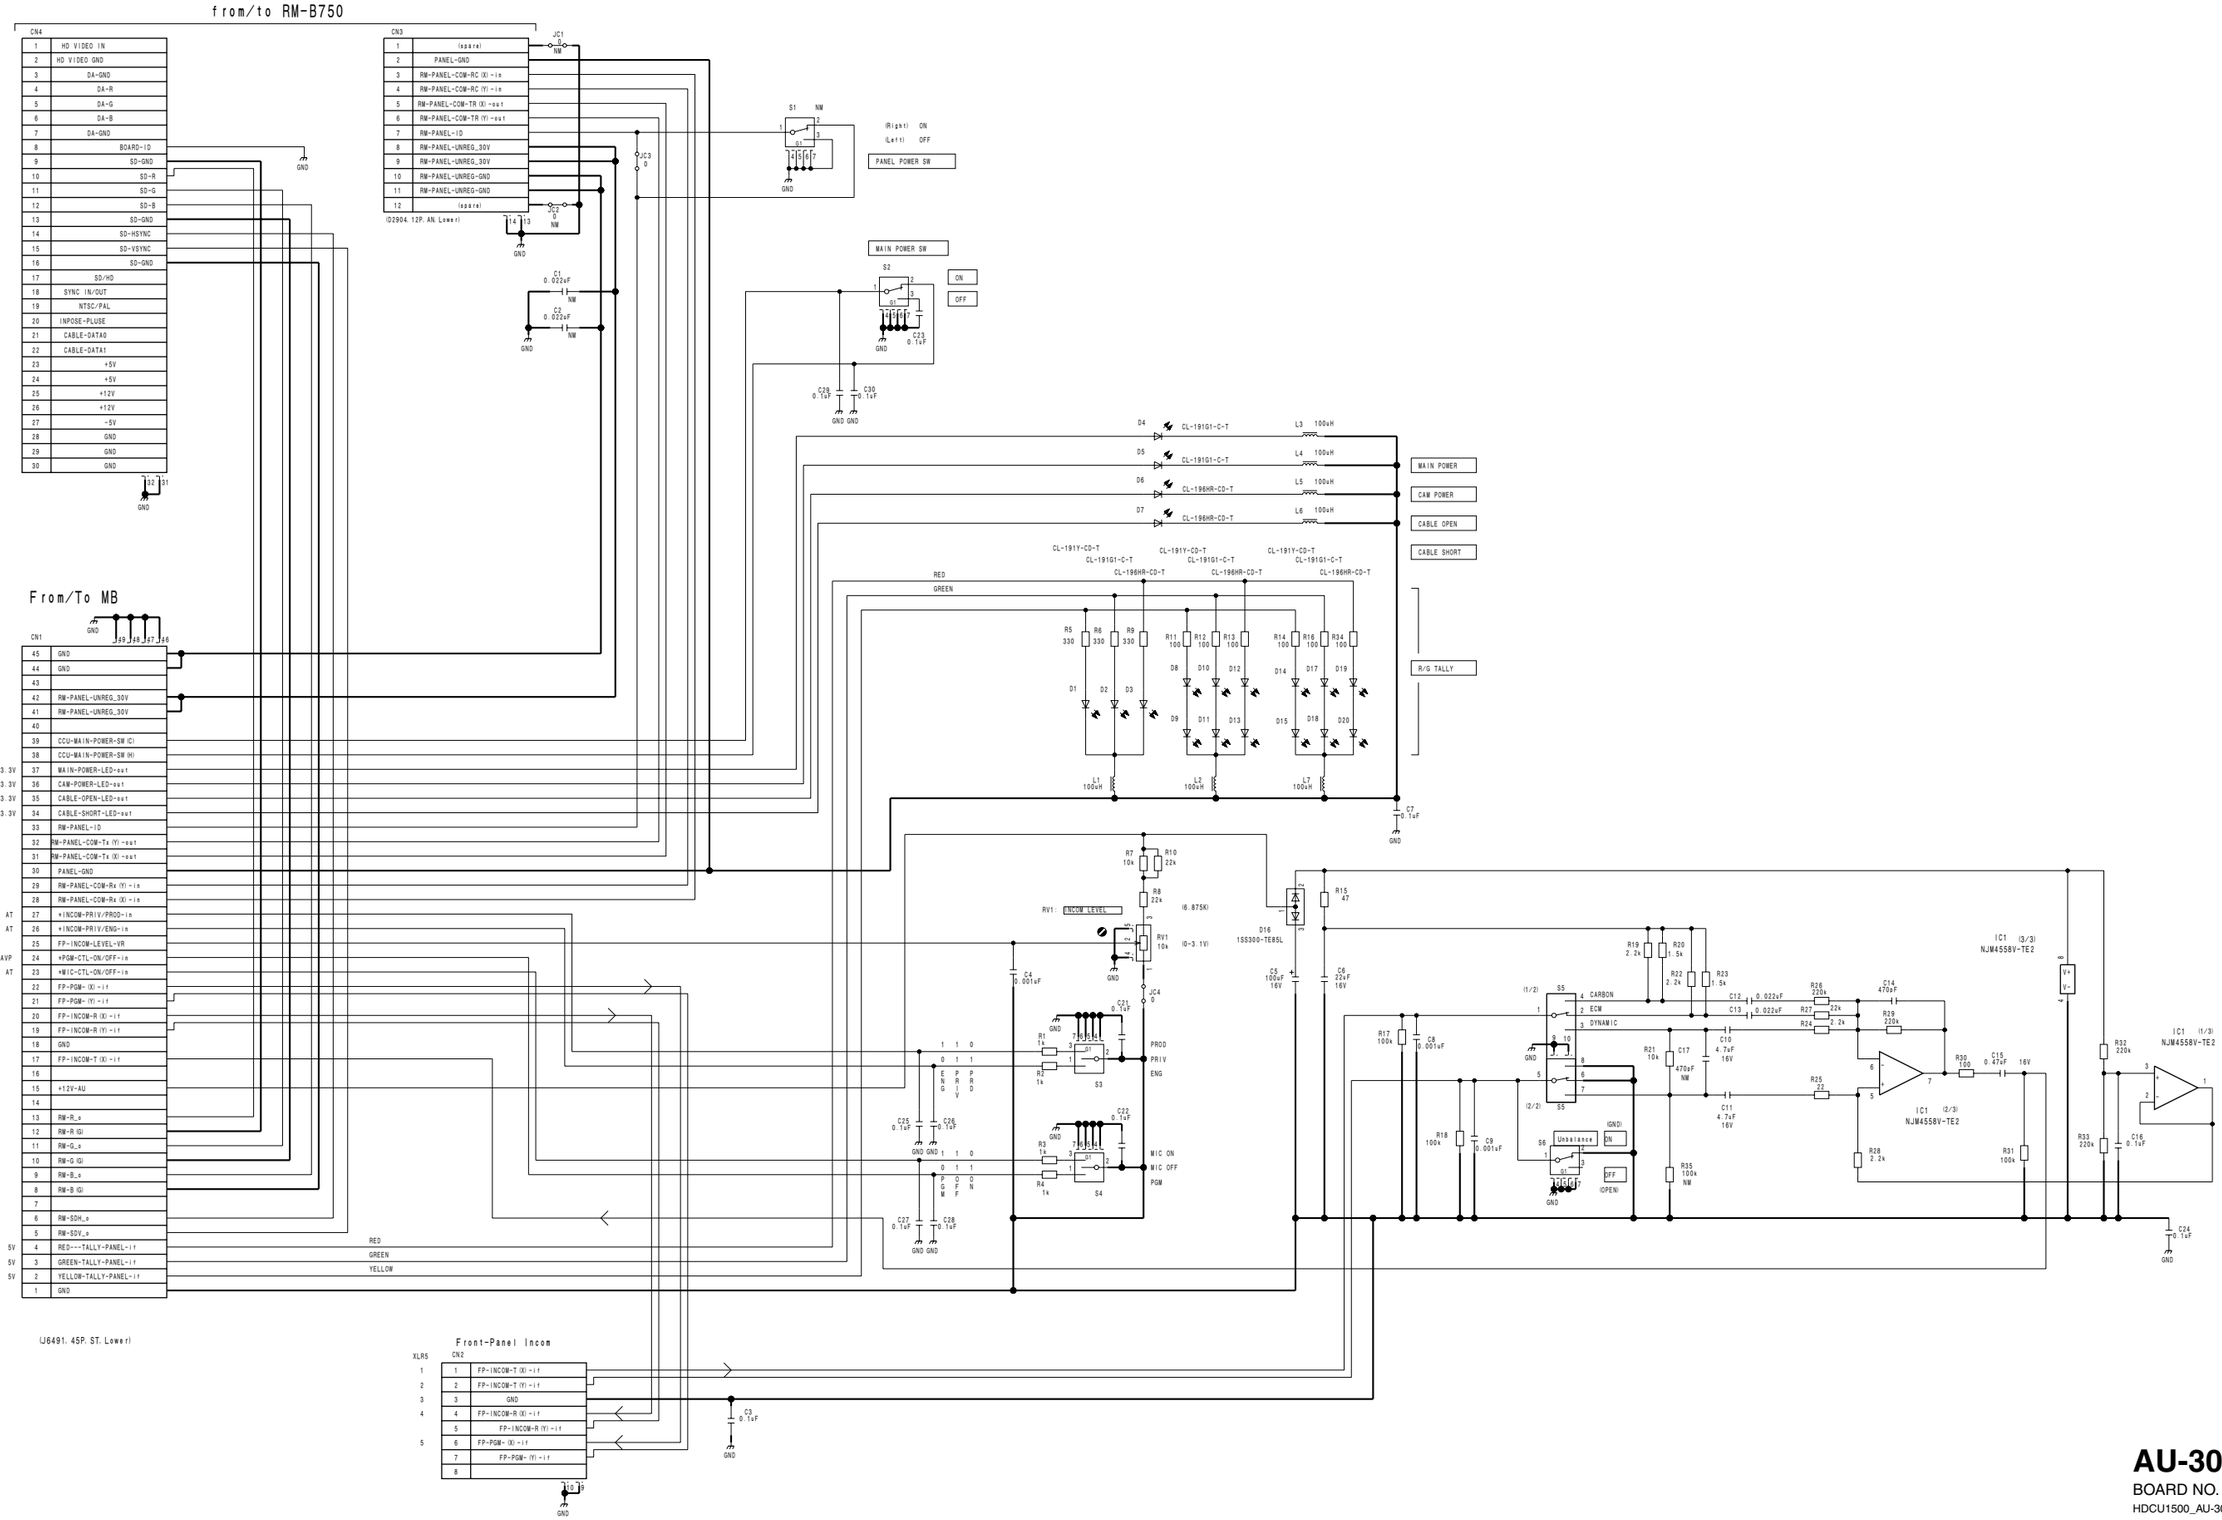

AU-303
BOARD NO. 1-867-895-11
HDCU1500_AU-303_011_1

AVP-6 (1/8)
SUFFIX: -11, -12, -31

AVP-6 (1/8)
SUFFIX: -11, -12, -31

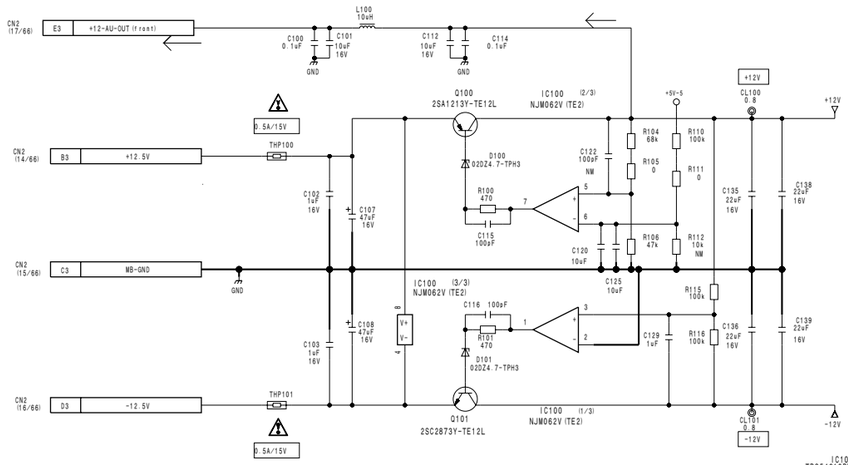

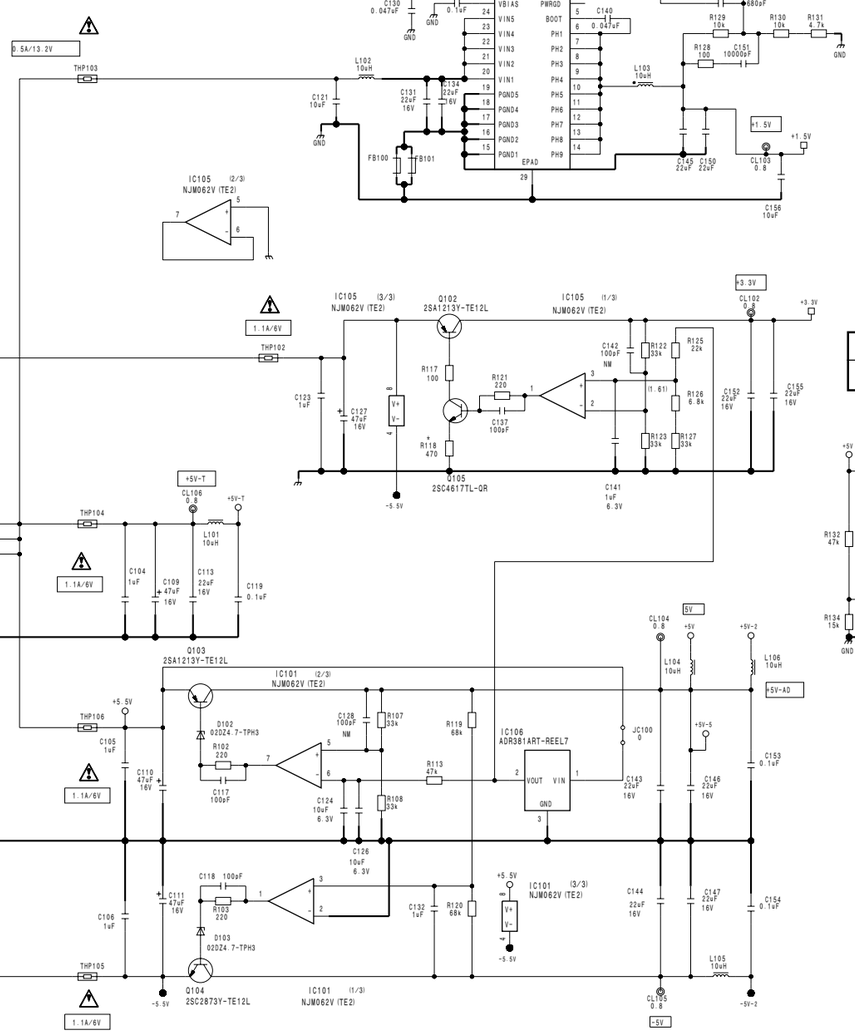

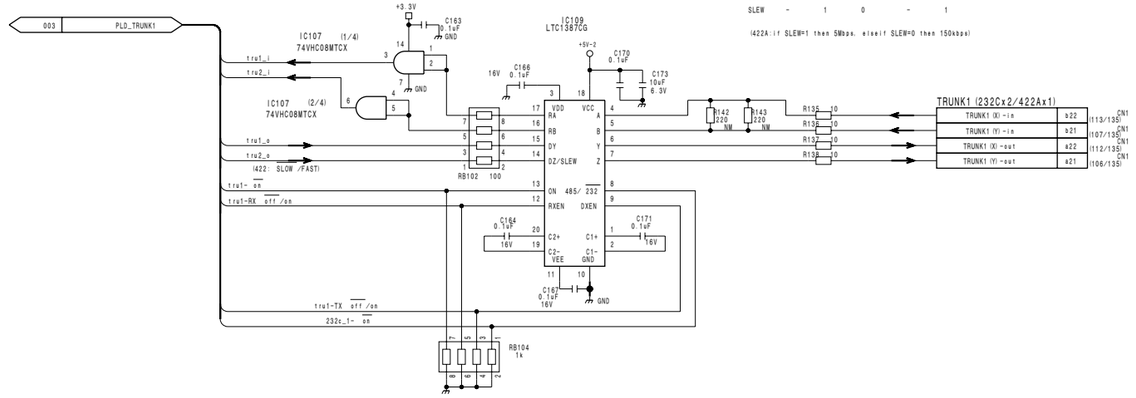

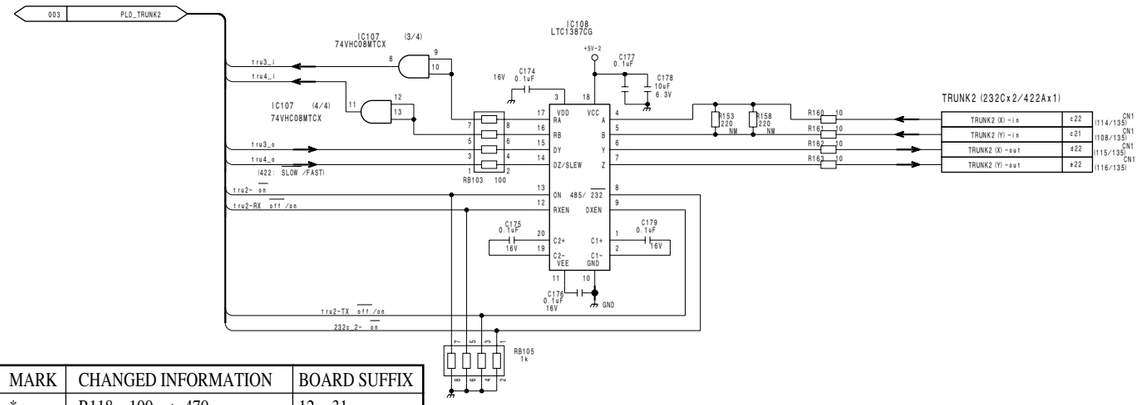

MARK	CHANGED INFORMATION	BOARD SUFFIX
*	R118 100 → 470	12 -, 31 -

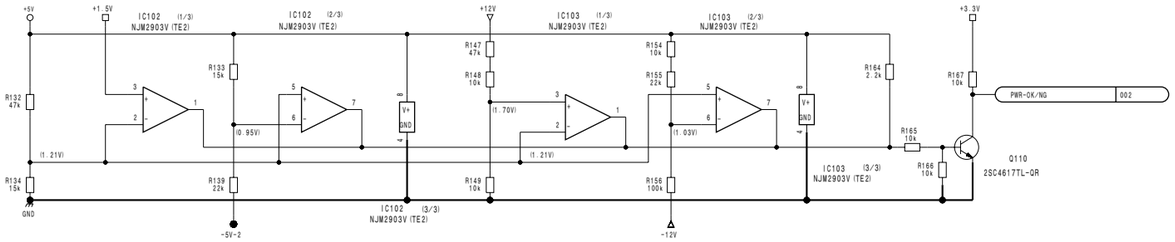

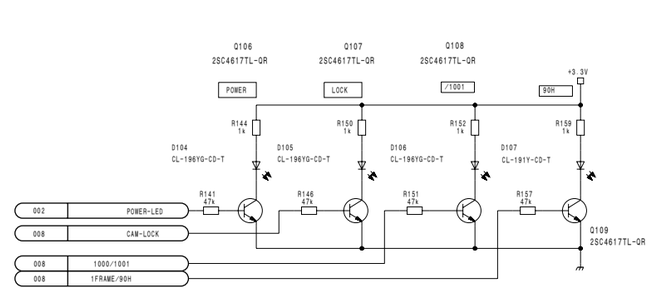



AVP-6 (1/8)
BOARD NO. 1-867-878-11, 12, 31
HDCU1000_AVP-6_011_1

AVP-6 (2/8)
SUFFIX: -11, -12, -31

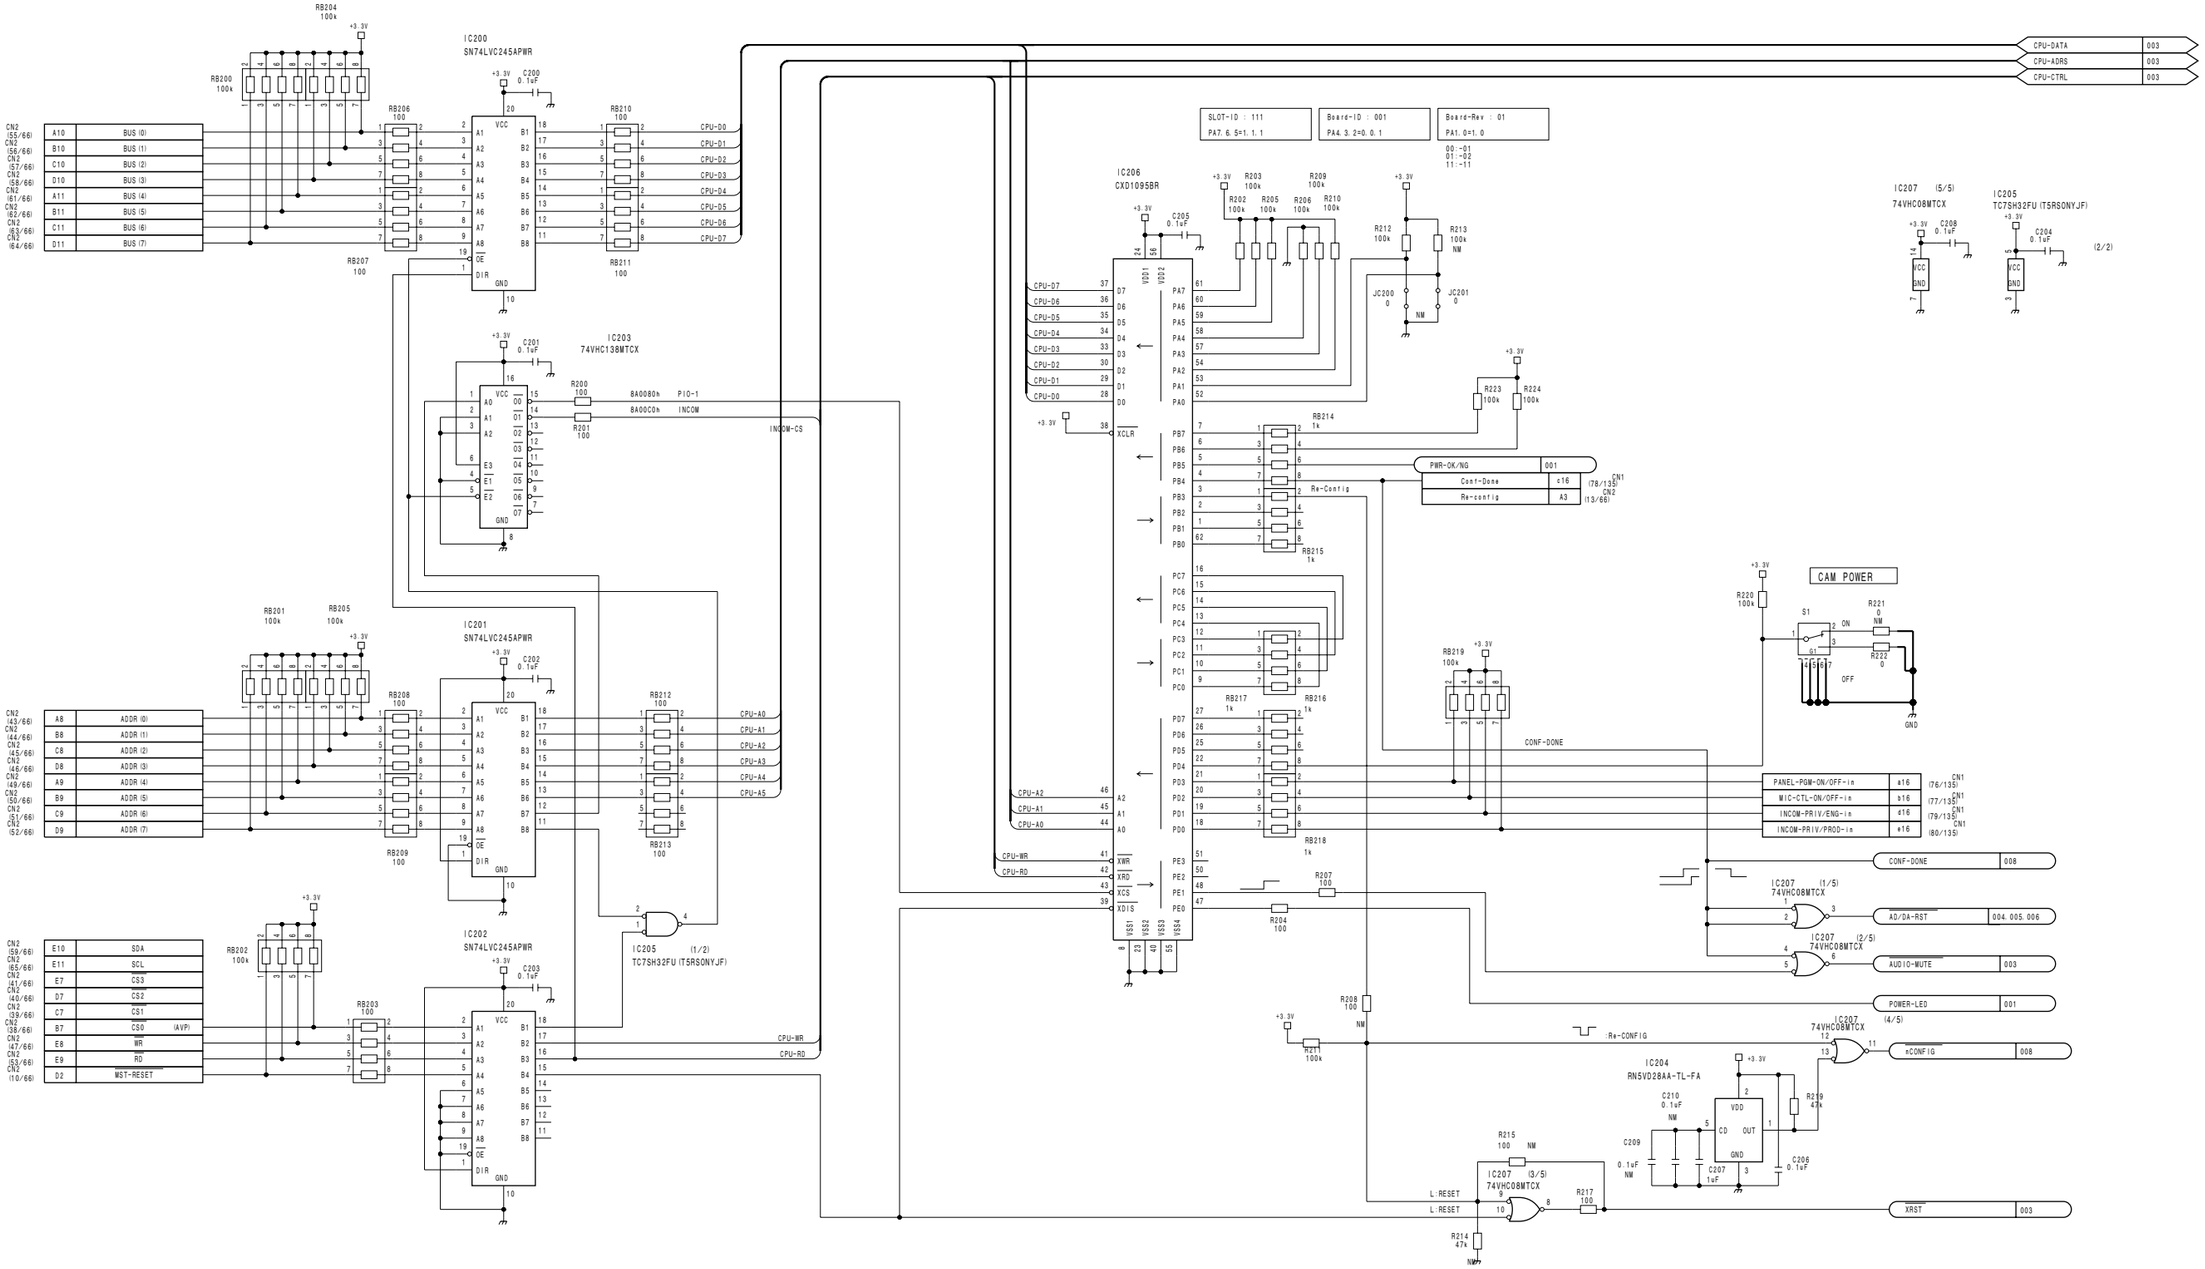

7-20

AVP-6 (2/8)
BOARD NO. 1-867-878-11, 12, 31
HDCU1000_AVP-6_011_2

AVP-6 (3/8)
SUFFIX: -11, -12, -31

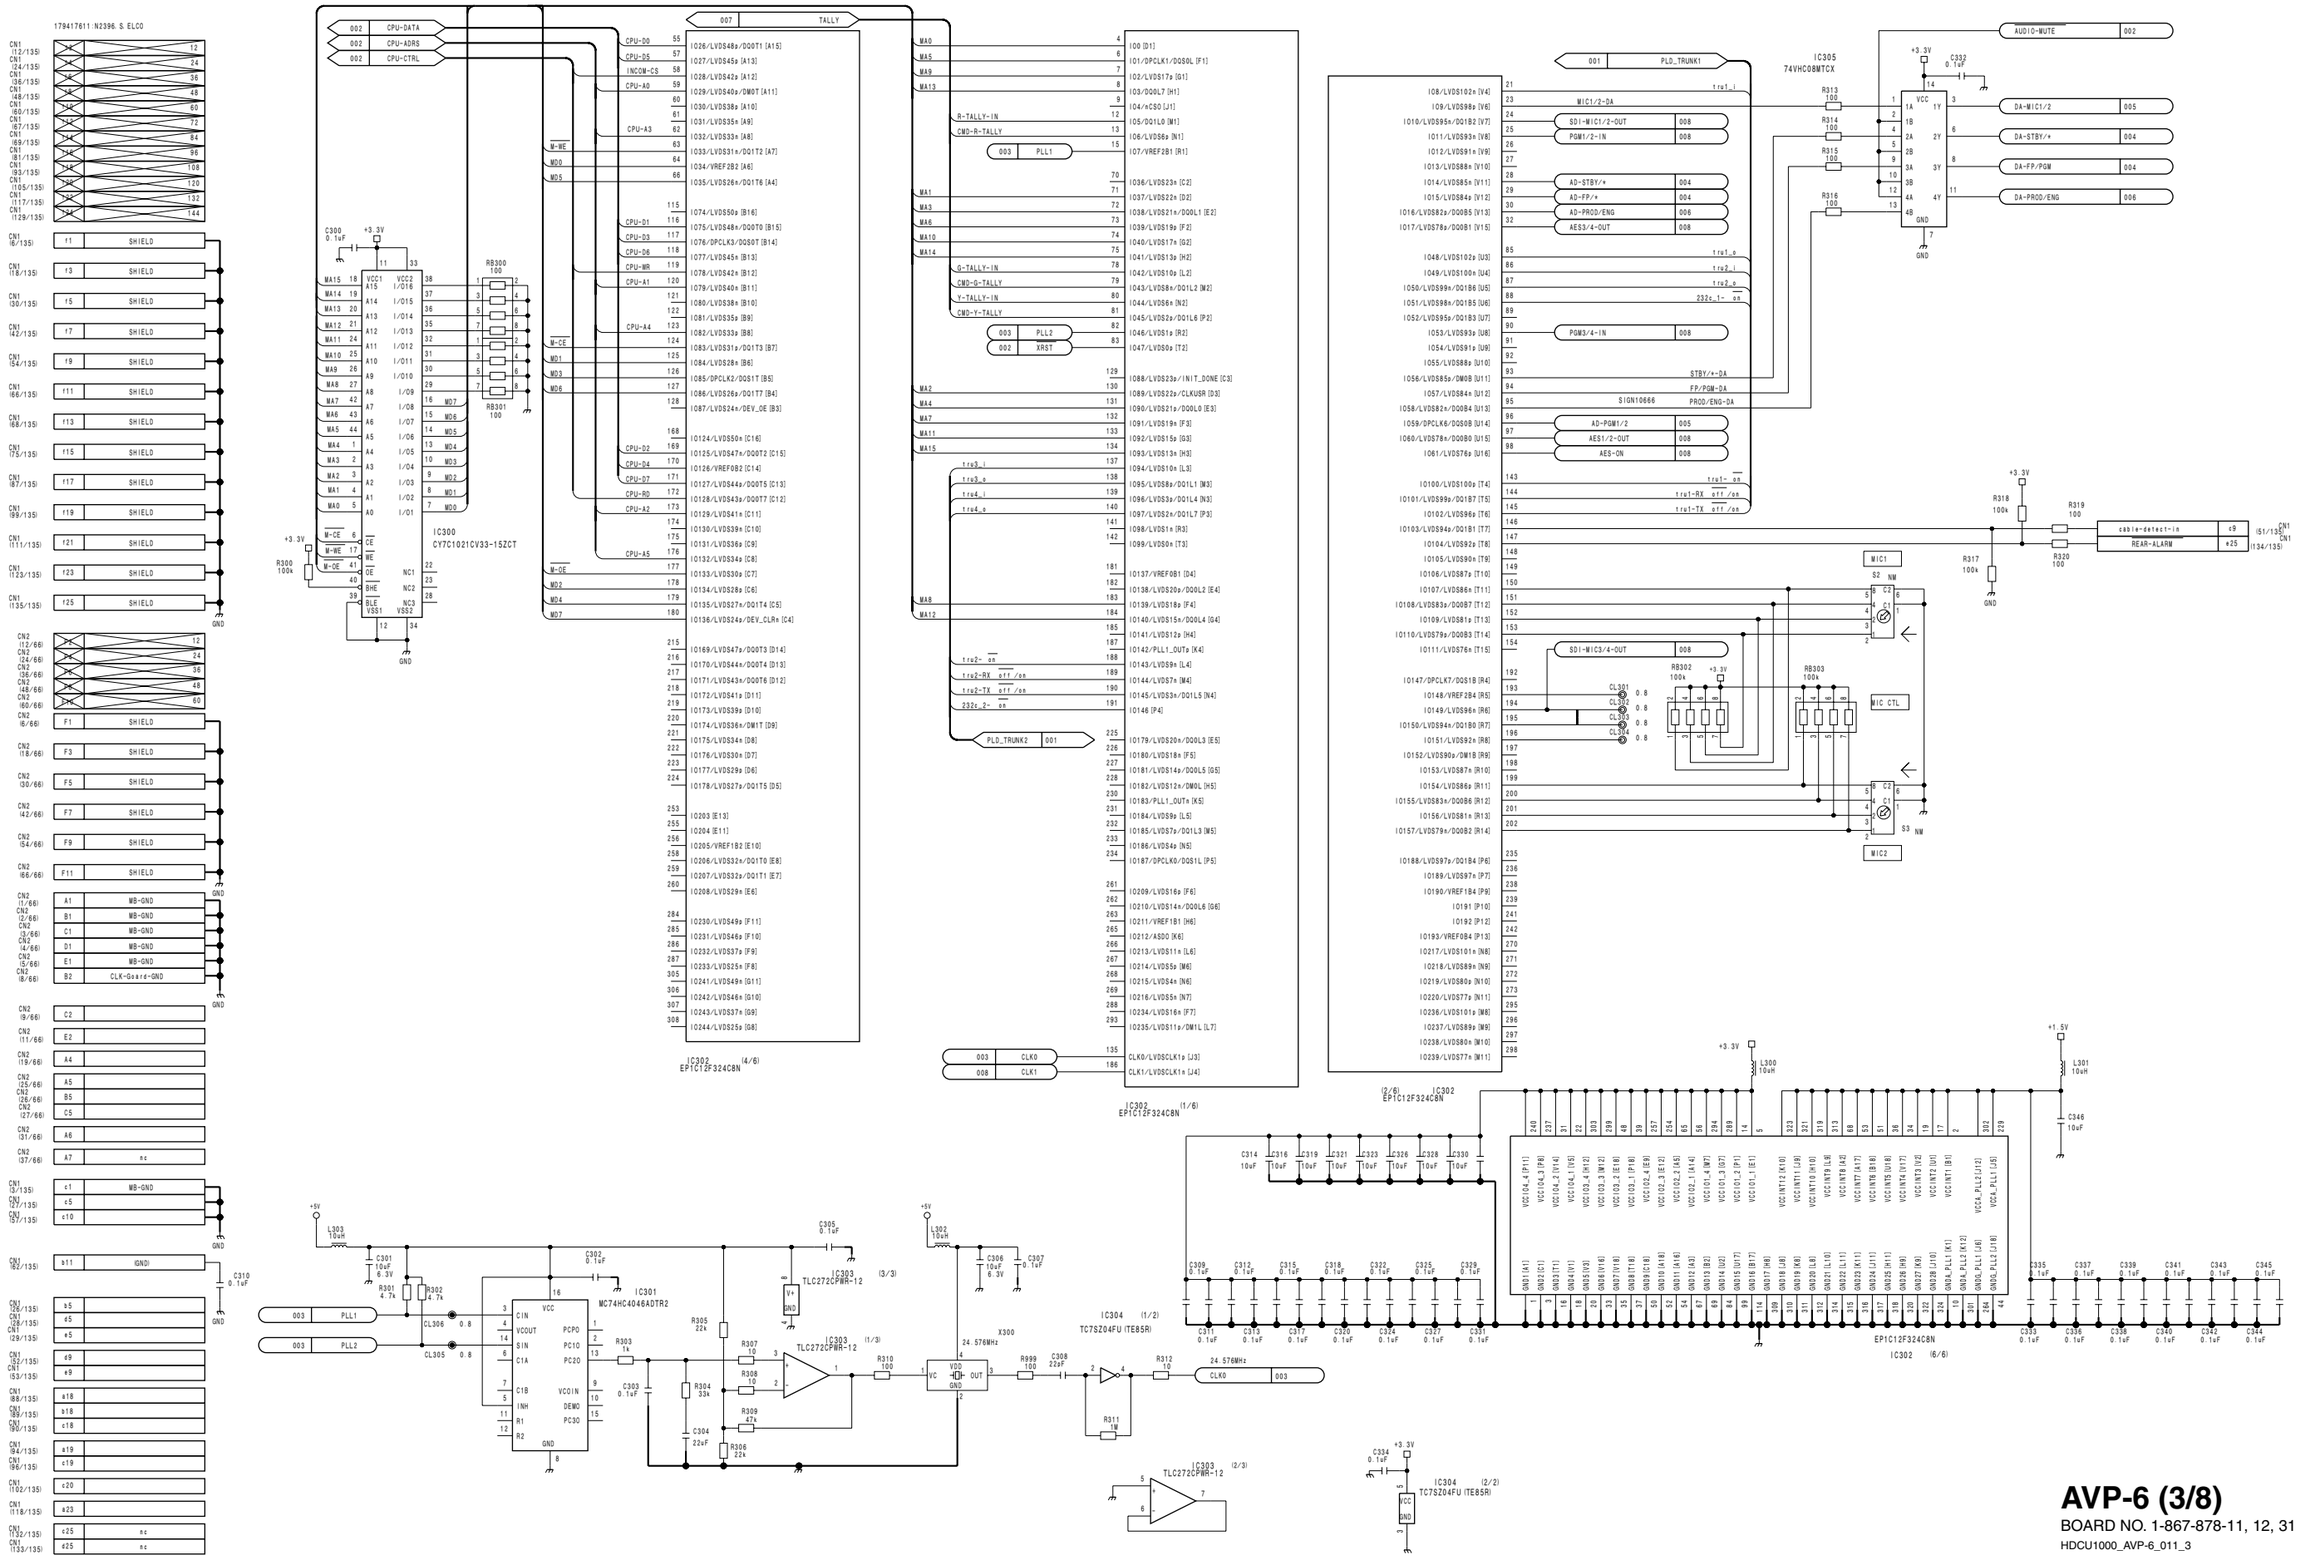

AVP-6 (3/8)

BOARD NO. 1-867-878-11, 12, 31

HDCU1000_AVP-6_011_3

7-21

AVP-6 (4/8)

SUFFIX: -11, -12, -31

AVP-6 (4/8)
SUFFIX: -11, -12, -31

MARK	CHANGED INFORMATION	BOARD SUFFIX
*	R429 22k → 10k	12 -, 31 -
	R435 220k → 100k	
	R444 1k → 1.5k	
	C439 0.0022uF → 0.001uF	

MARK	CHANGED INFORMATION	BOARD SUFFIX
*	R436, R438 10 → 22	12 -, 31 -
	R470, R472 ADDED	

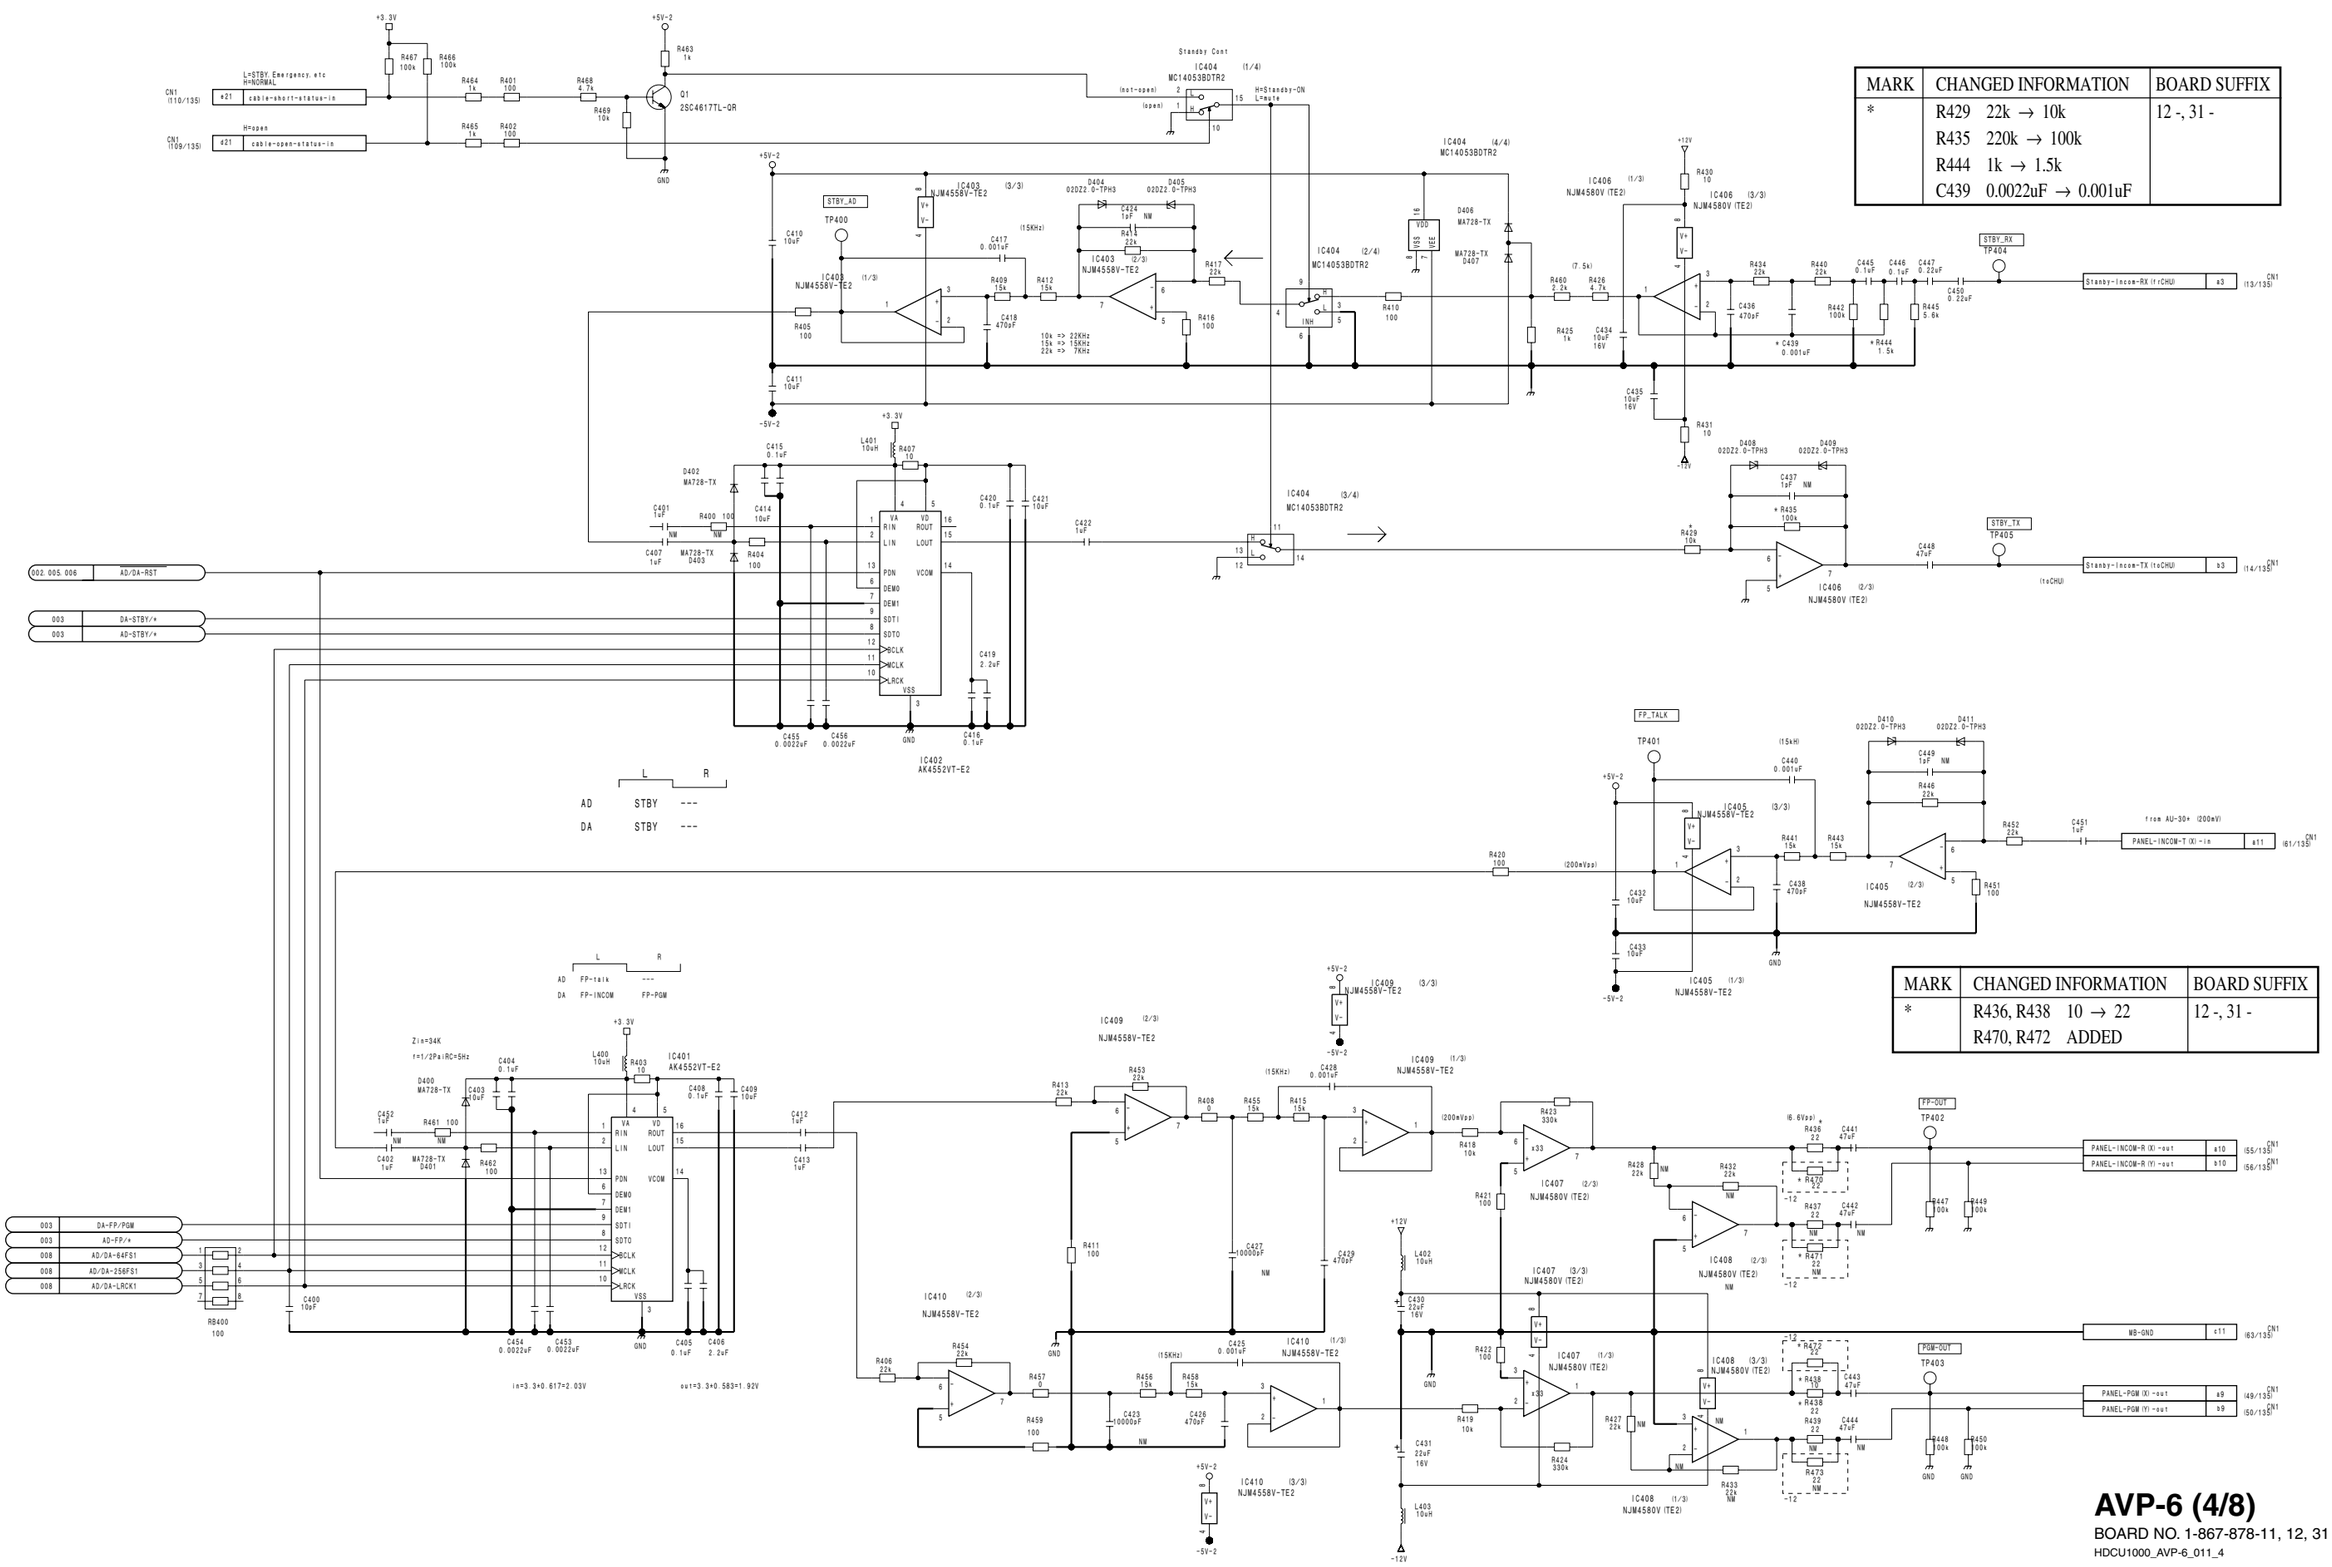

7-22

AVP-6 (4/8)

BOARD NO. 1-867-878-11, 12, 31

HDCU1000_AVP-6_011_4

AVP-6 (5/8)
SUFFIX: -11, -12, -31

AVP-6 (5/8)
SUFFIX: -11, -12, -31

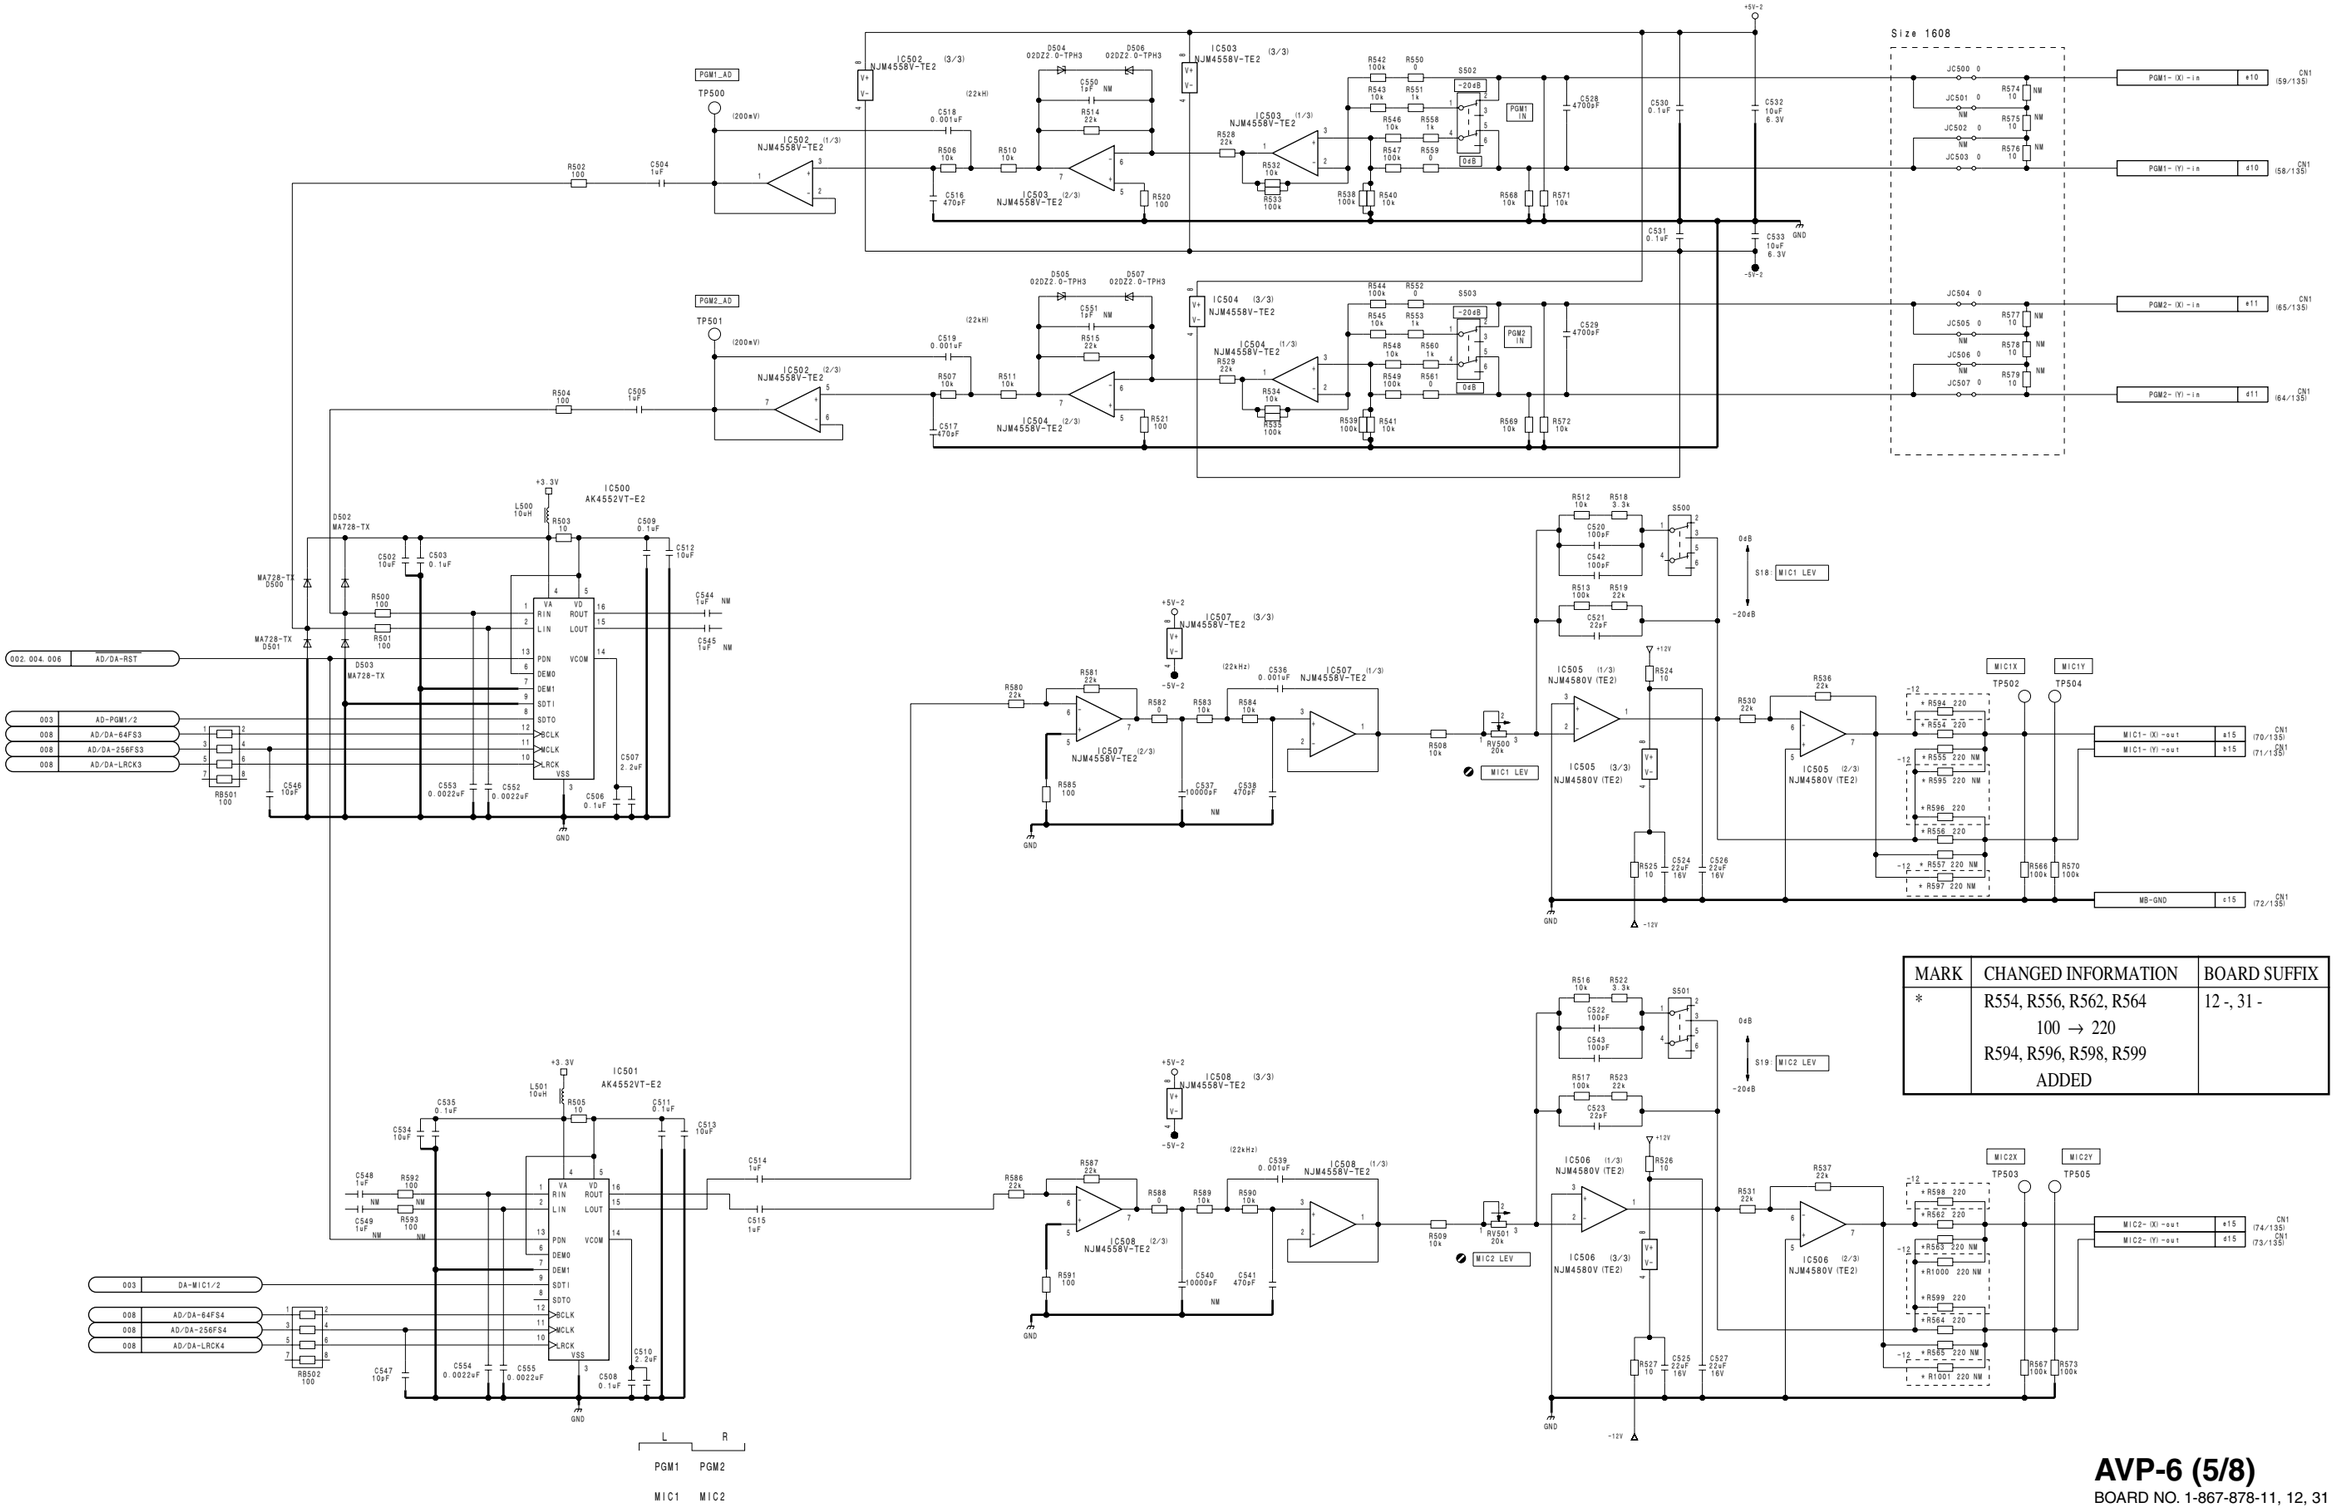

MARK	CHANGED INFORMATION	BOARD SUFFIX
*	R554, R556, R562, R564 100 → 220 R594, R596, R598, R599 ADDED	12 -, 31 -

AVP-6 (5/8)
BOARD NO. 1-867-878-11, 12, 31
HDCU1000_AVP-6_011_5

AVP-6 (6/8)
SUFFIX: -11, -12, -31

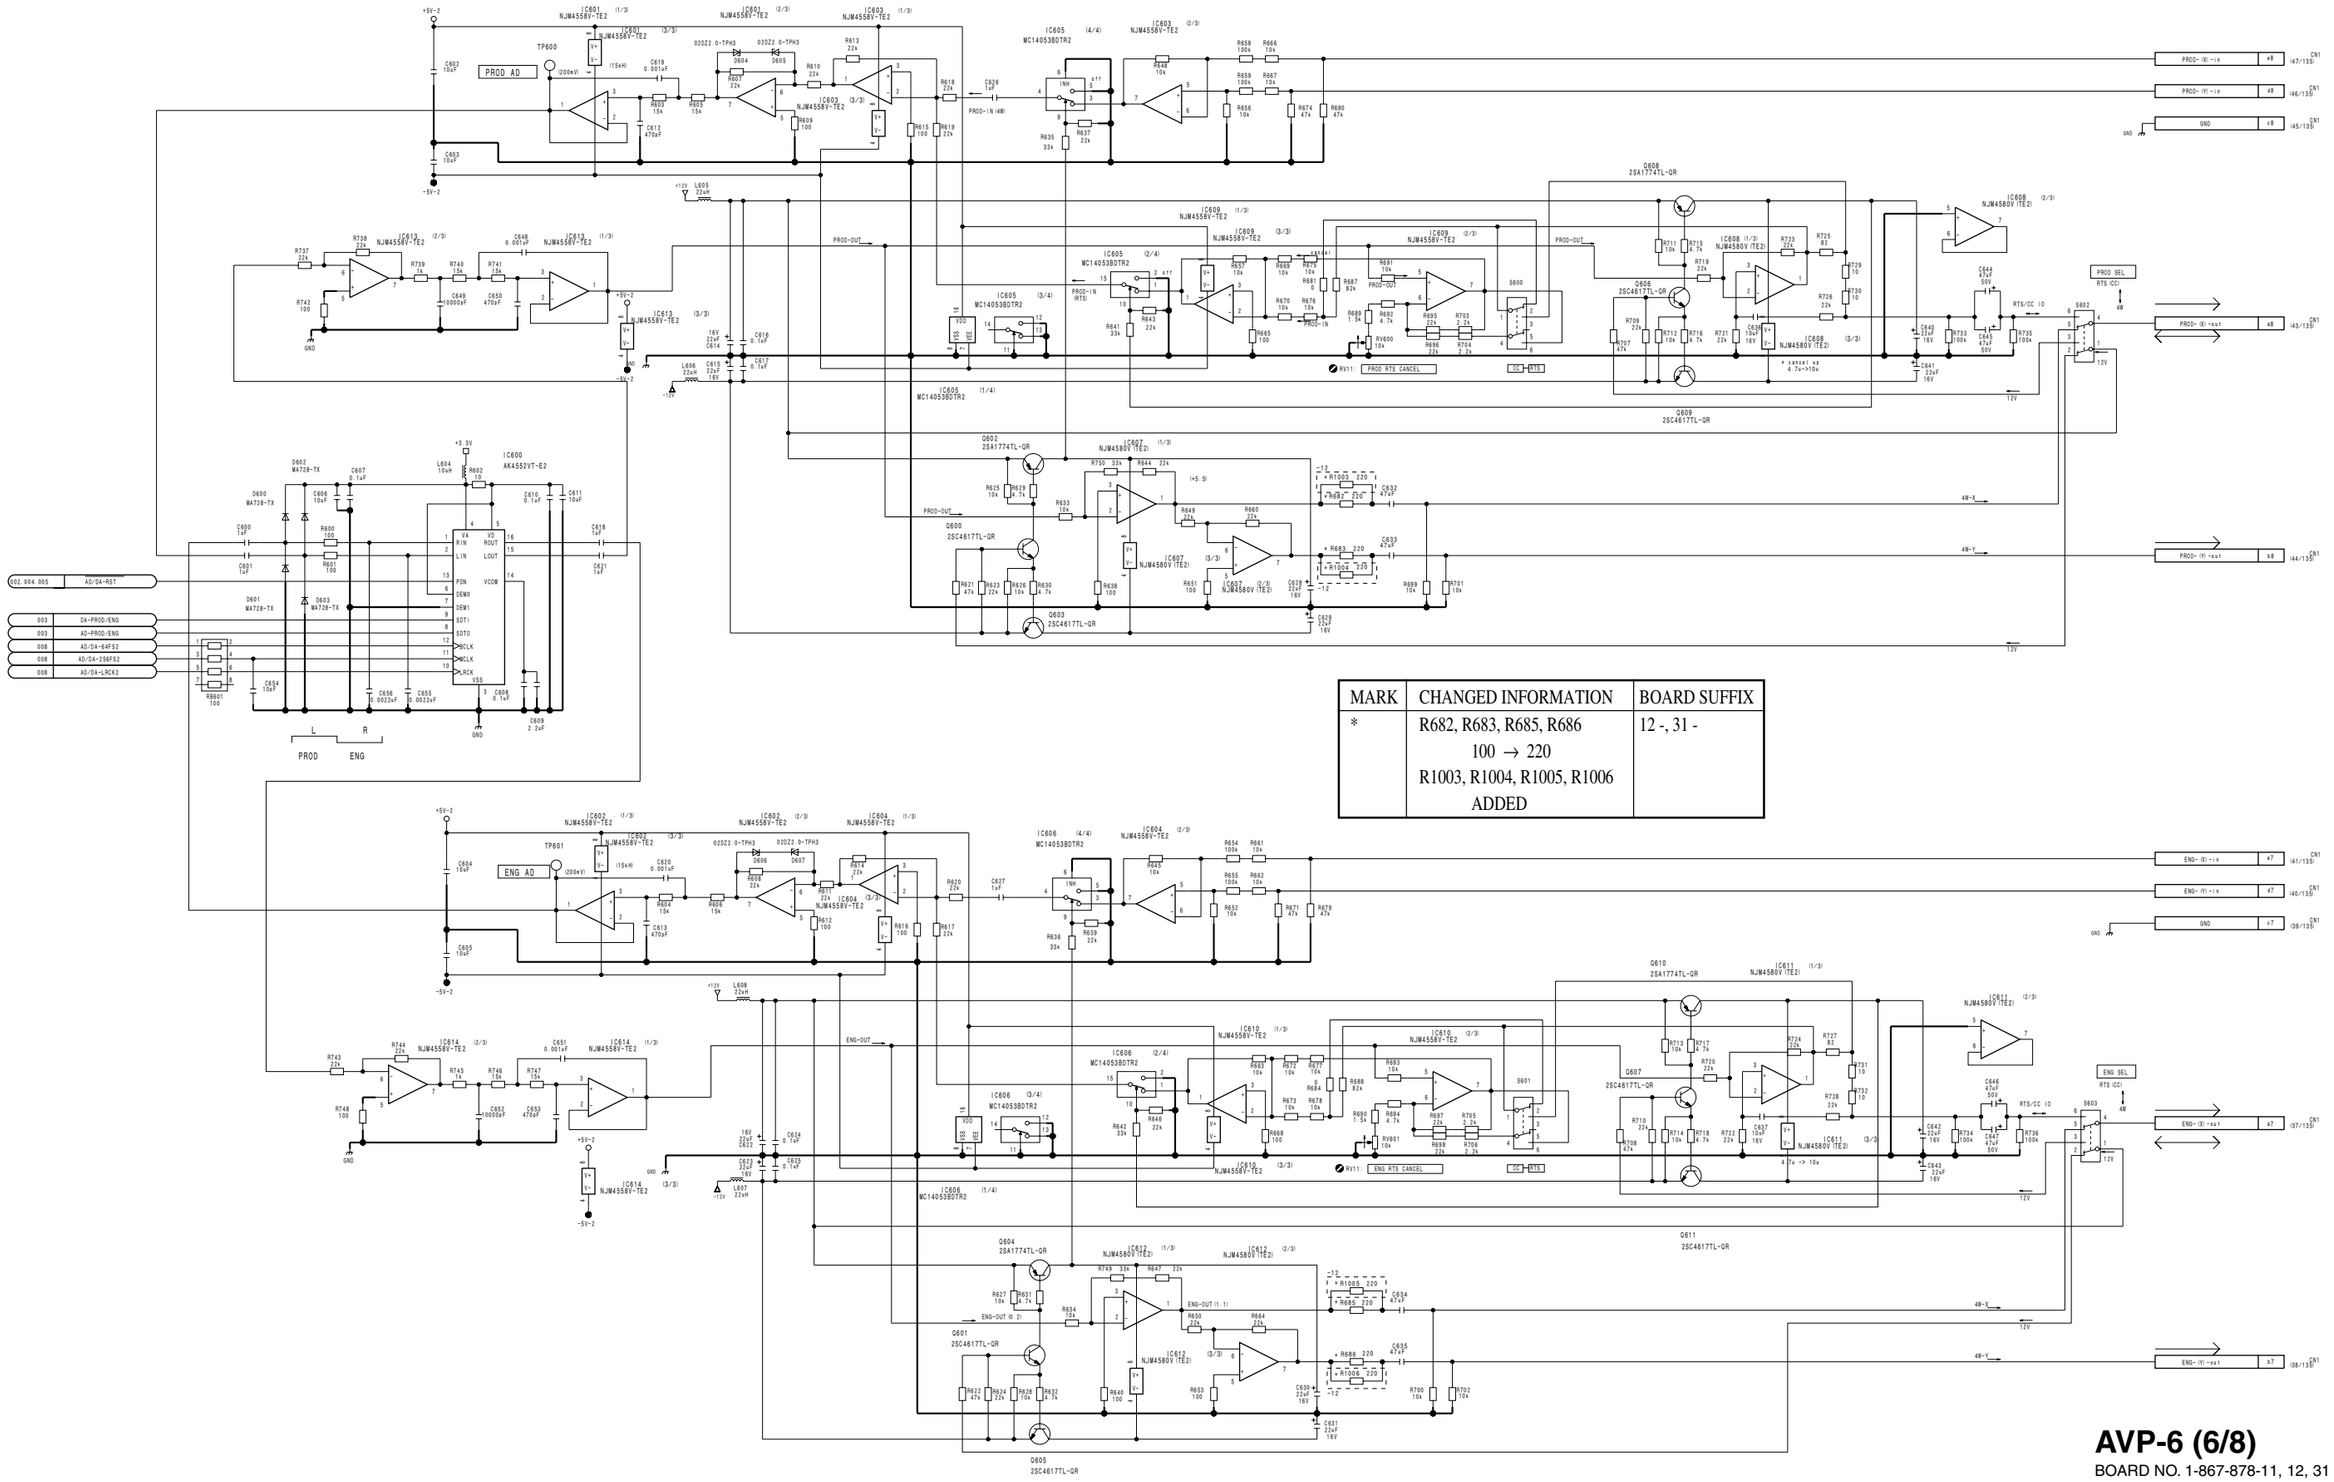

MARK	CHANGED INFORMATION	BOARD SUFFIX
*	R682, R683, R685, R686 100 → 220 R1003, R1004, R1005, R1006 ADDED	12 -, 31 -

7-24

AVP-6 (6/8)
BOARD NO. 1-867-878-11, 12, 31
HDCU1000_AVP-6_011_6

AVP-6 (7/8)
SUFFIX: -11, -12, -31

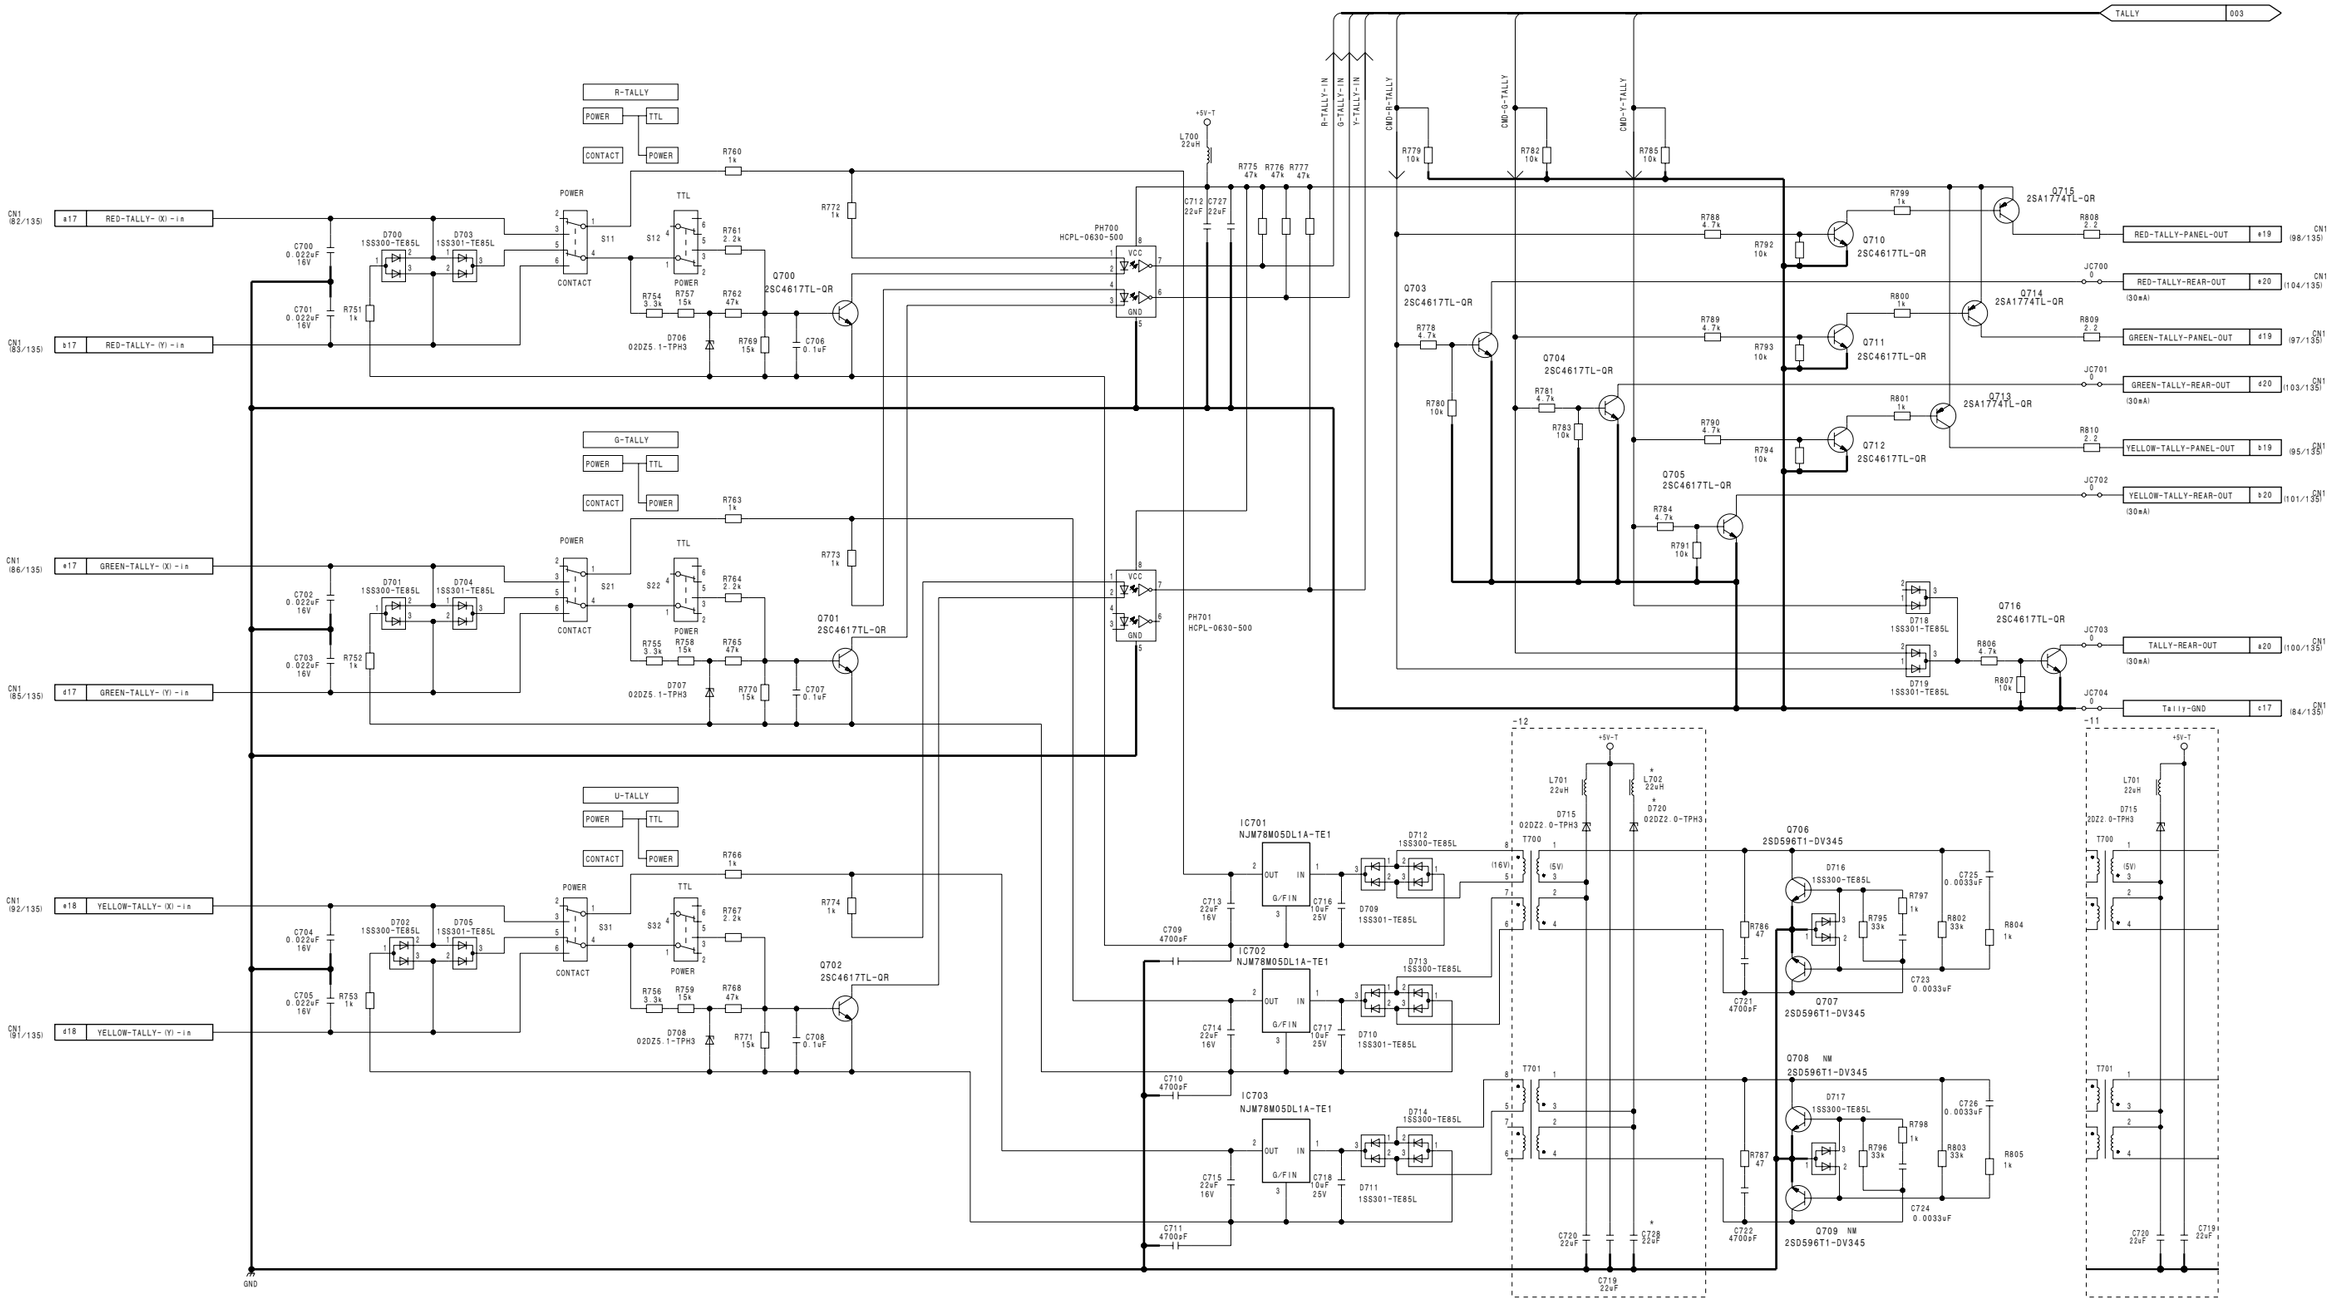

MARK	CHANGED INFORMATION	BOARD SUFFIX
*	C728, D720, L702 ADDED	12 -, 31 -

AVP-6 (7/8)
BOARD NO. 1-867-878-11, 12, 31
HDCU1000_AVP-6_011_7

AVP-6 (8/8)
SUFFIX: -11, -12, -31

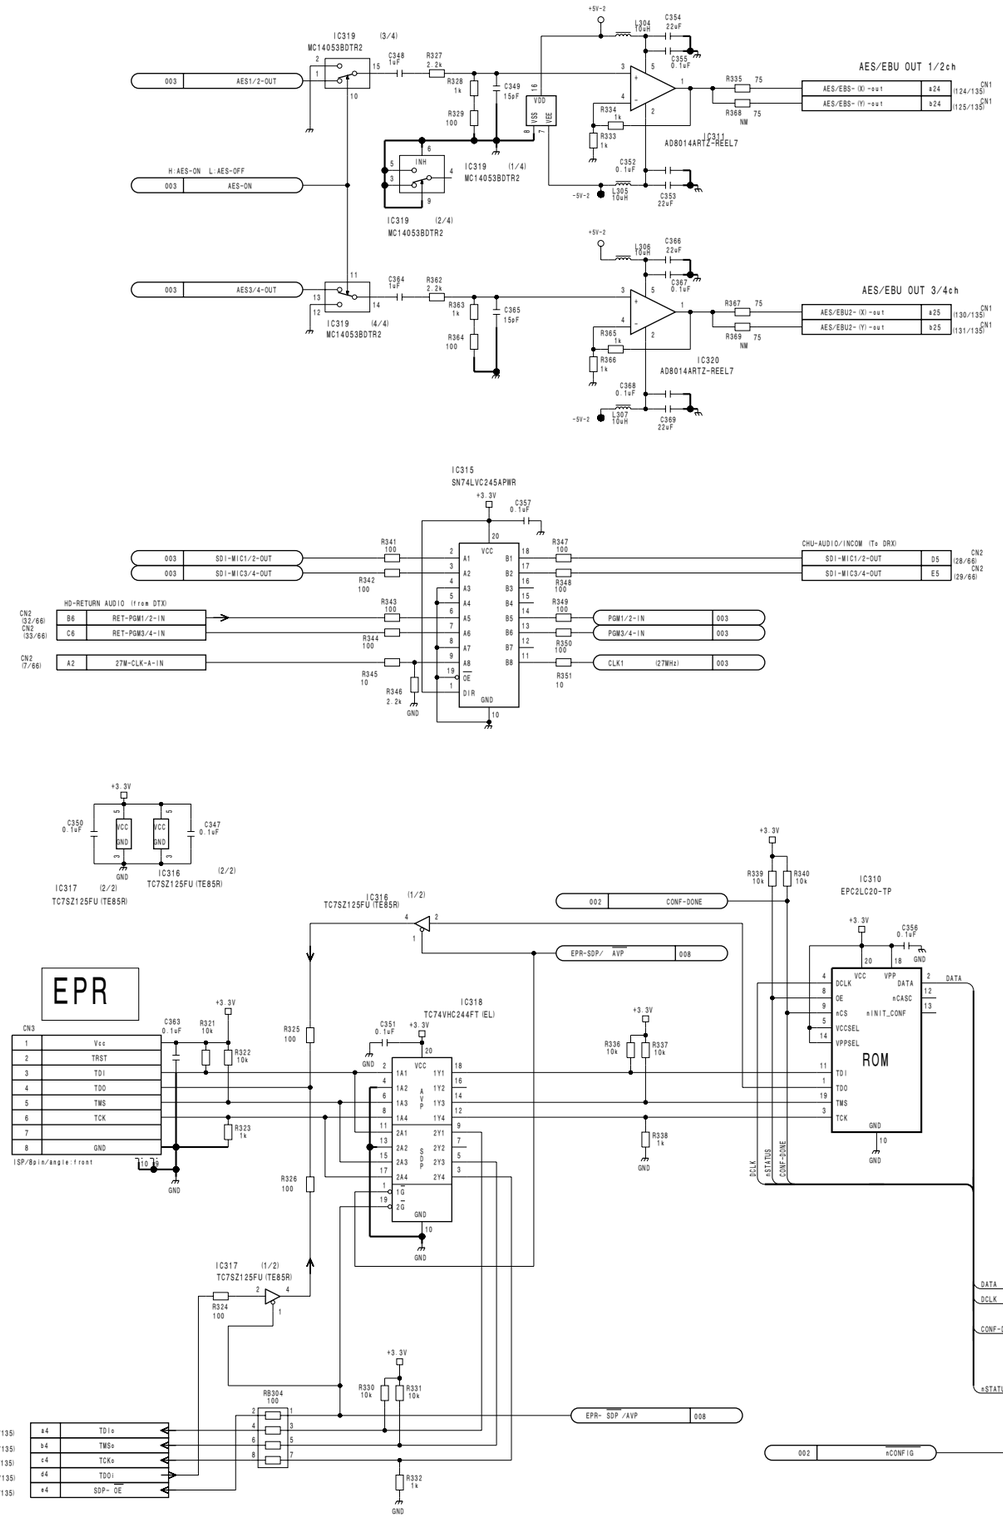

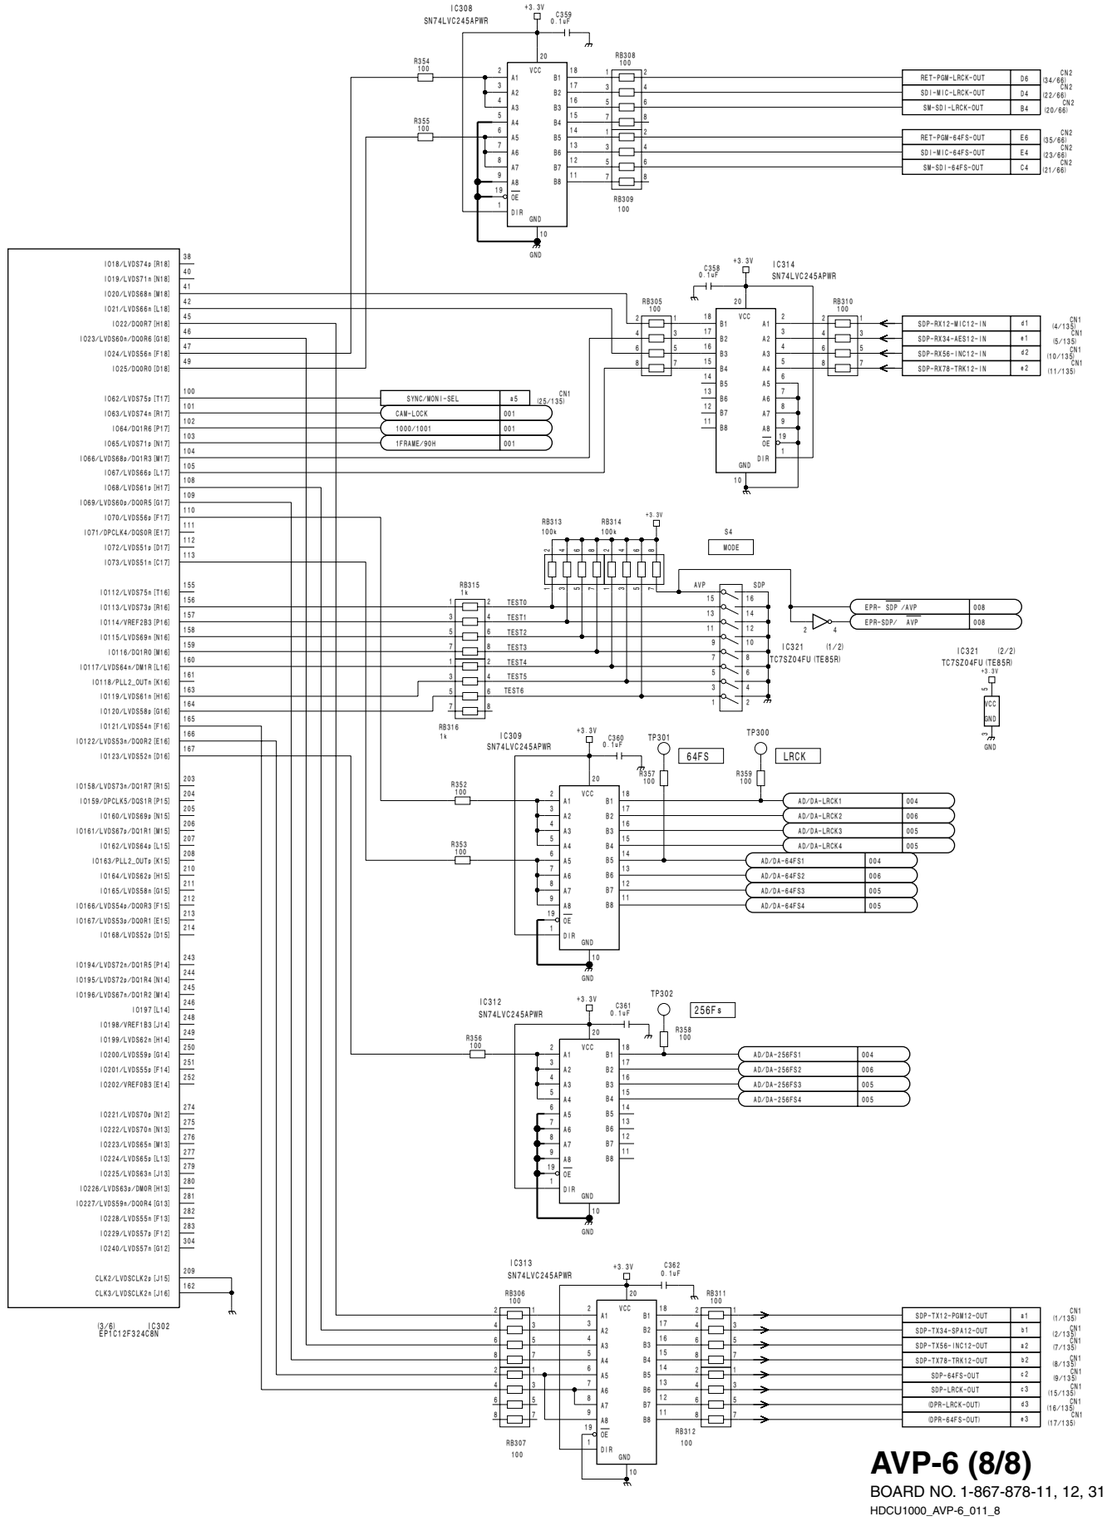

AVP-6 (8/8)
BOARD NO. 1-867-878-11, 12, 31
HDCU1000_AVP-6_011_8

7-26

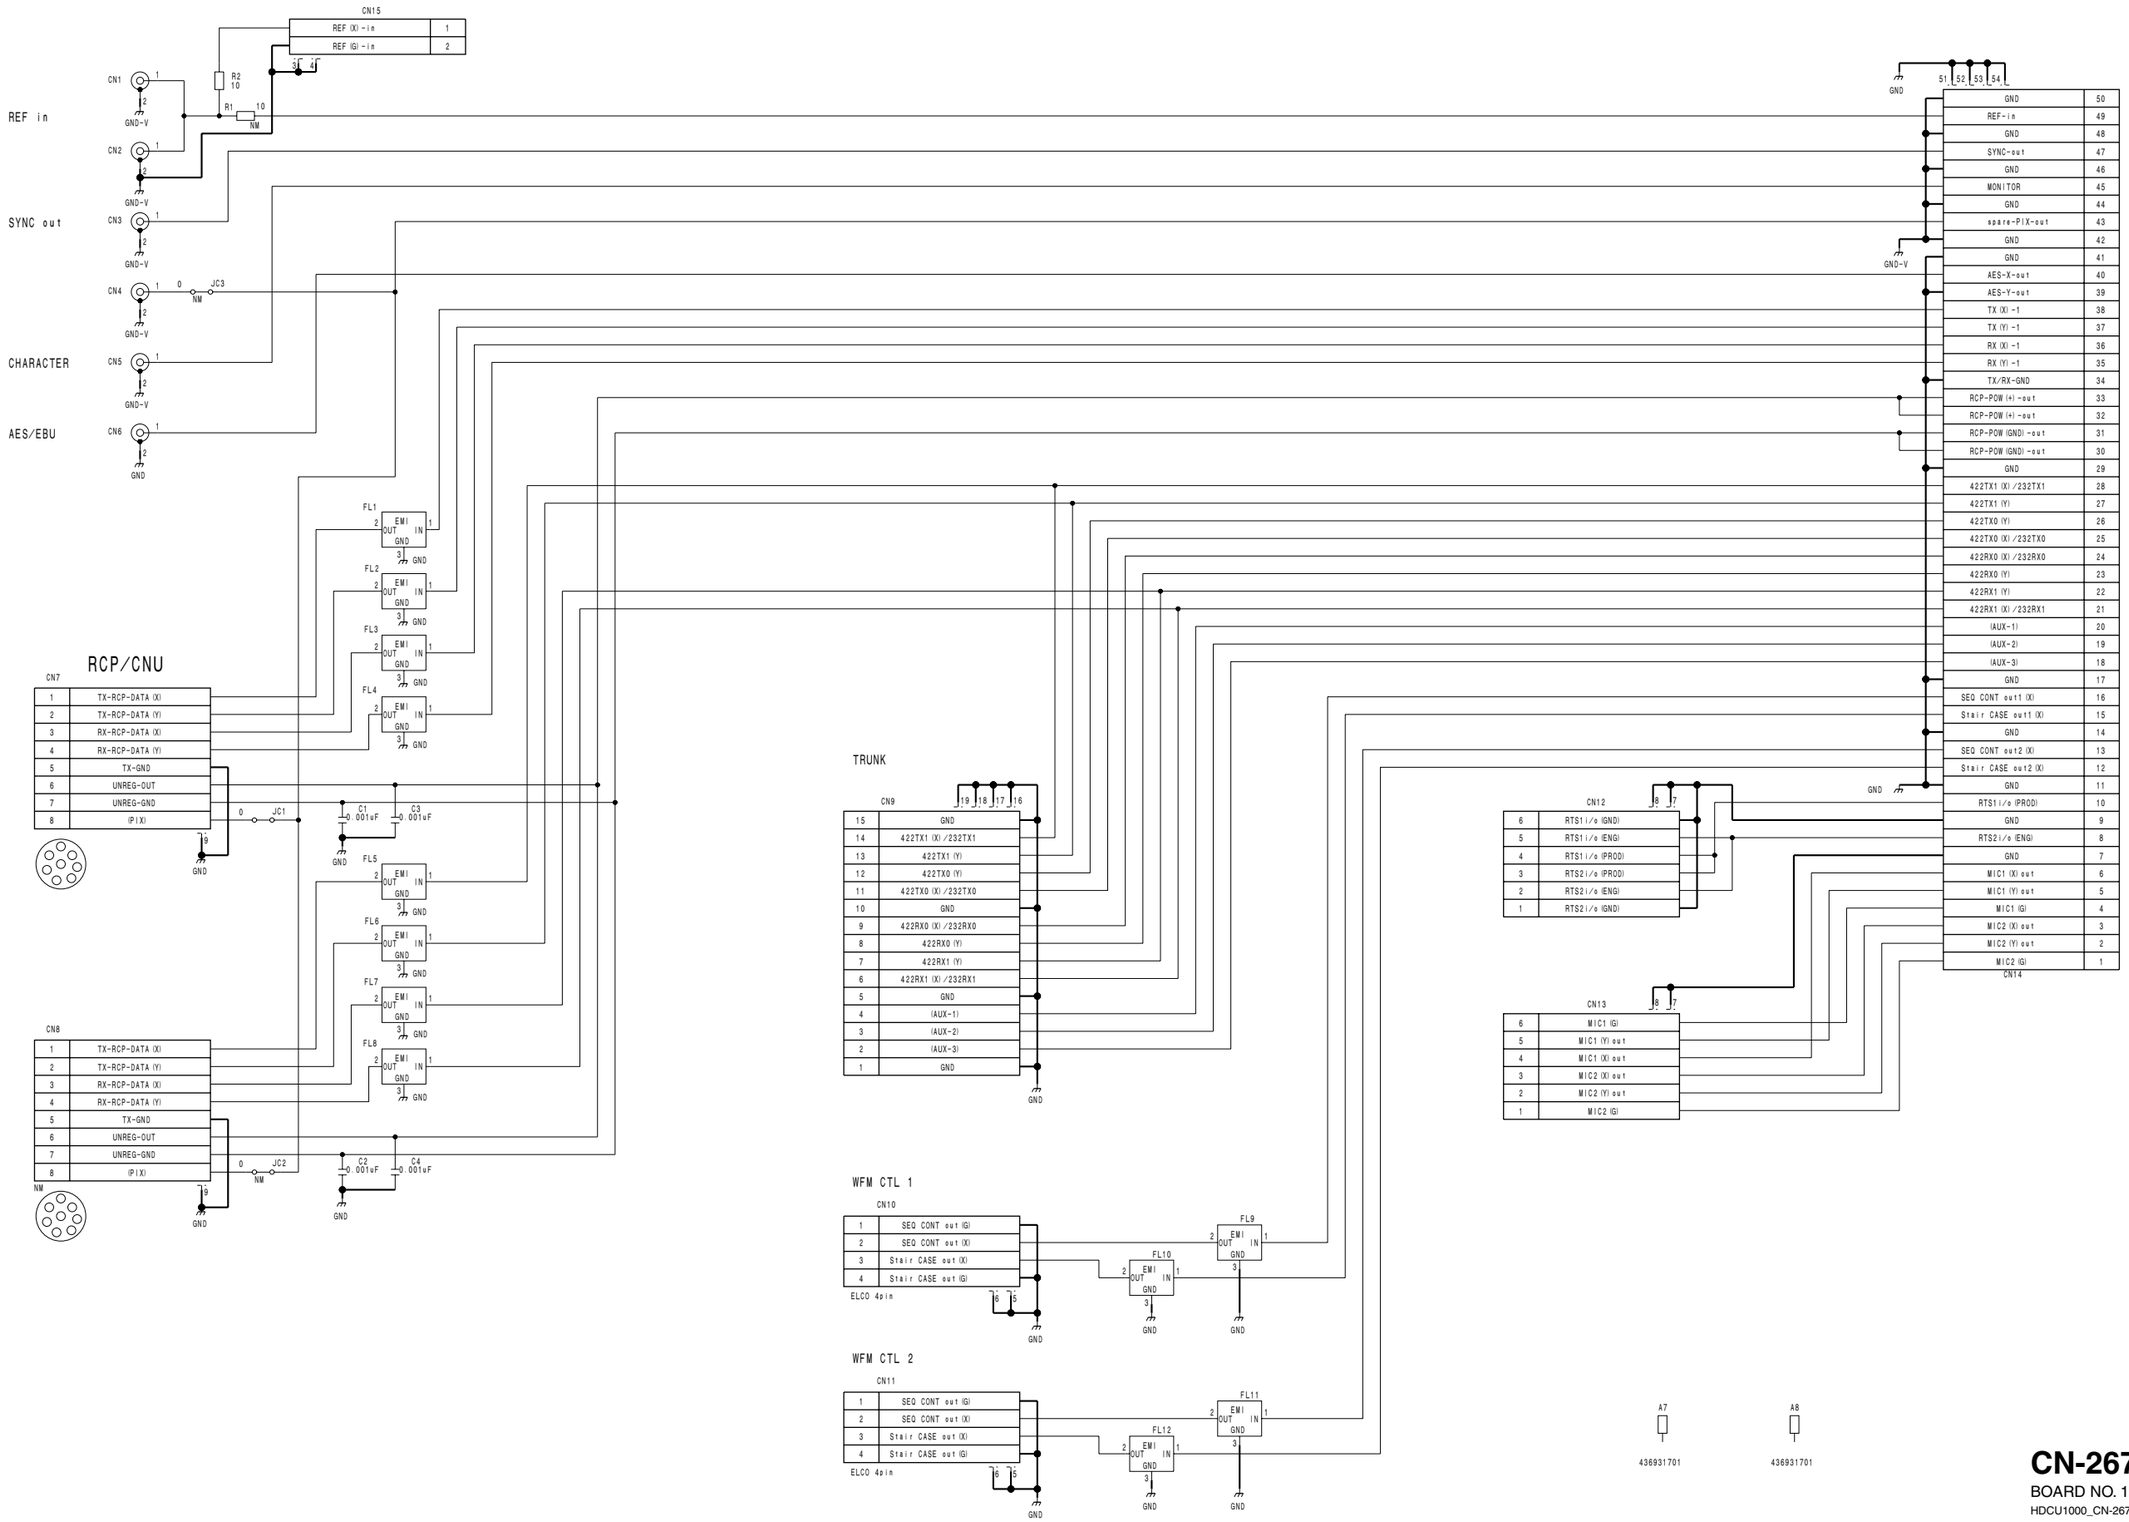

CN-2672

BOARD NO. 1-867-890-11, 31

HDCU1000_CN-2672_011_1

MIC1 (RTS1)

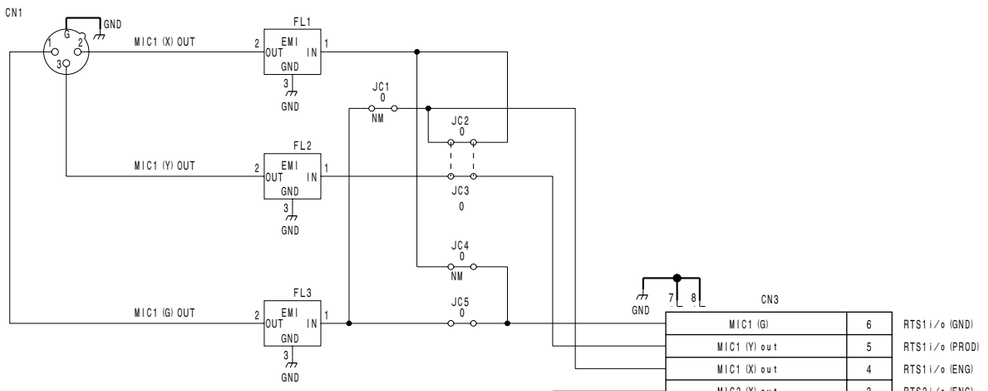

MIC2 (RTS2)

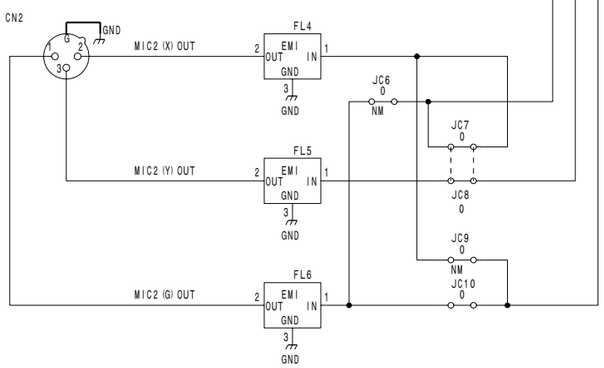

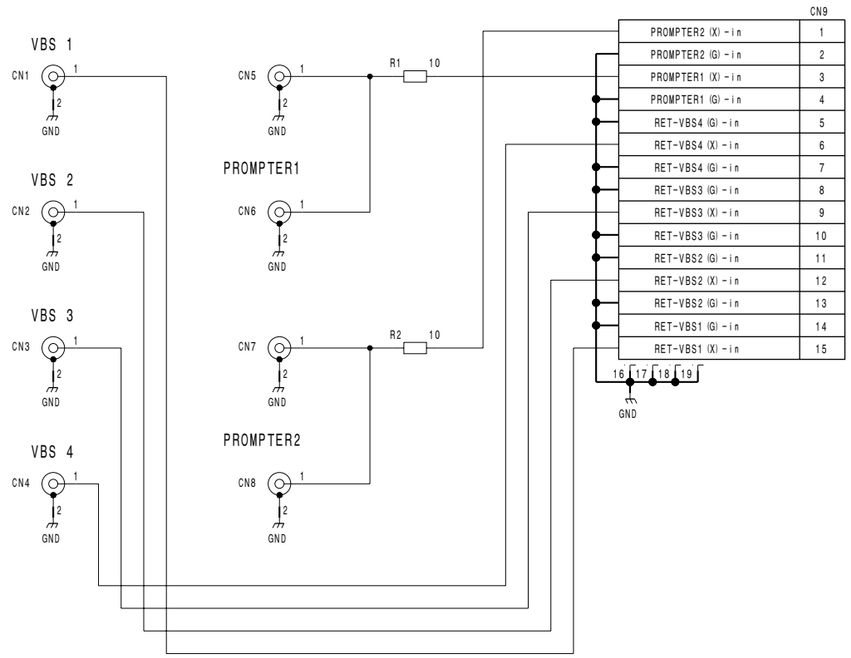

CN-2673
BOARD NO. 1-867-887-11, 31
HDCU1000_CN-2673_011_1

CN-2674
BOARD NO. 1-867-891-11, 31
HDCU1000_CN-2674_011_1

PROMPTER in

REF in

CHARACTER/SYNC out

RCP/CNU

TRUNK

WFM CTL 1

CN1 CN2 CN3 CN4 CN5 CN6 CN7 CN8 CN9 CN10 CN11 CN12

JC1 JC2 JC3 R1 R2 R3 R4 C1 C2 FL1 FL2 FL3 FL4 FL5 FL6

CN6 NM

1	TX-RCP-DATA (X)
2	TX-RCP-DATA (Y)
3	RX-RCP-DATA (X)
4	RX-RCP-DATA (Y)
5	TX-GND
6	UNREG-OUT
7	UNREG-GND
8	(PIX)

CN7

15	GND
14	422TX1 (X) /232TX1
13	422TX1 (Y)
12	422TX0 (Y)
11	422TX0 (X) /232TX0
10	GND
9	422RX0 (X) /232RX0
8	422RX0 (Y)
7	422RX1 (Y)
6	422RX1 (X) /232RX1
5	GND
4	(AUX-1)
3	(AUX-2)
2	(AUX-3)
1	GND

CN8

1	SEQ CONT out (G)
2	SEQ CONT out (X)
3	Stair CASE out (X)
4	Stair CASE out (G)

CN9

1	MIC1 (G)
2	MIC1 (Y) out
3	MIC1 (X) out
4	MIC2 (X) out
5	MIC2 (Y) out
6	MIC2 (G)

CN10

PROMPTER2 (X) -in	1
PROMPTER2 (G) -in	2
PROMPTER1 (X) -in	3
PROMPTER1 (G) -in	4
N.C.	5
N.C.	6
N.C.	7
N.C.	8
N.C.	9
N.C.	10
N.C.	11
N.C.	12
N.C.	13
N.C.	14
N.C.	15

CN11

GND	50
REF-in	49
GND	48
SYNC-out	47
GND	46
SPARE-MONITOR	45
GND	44
GND	43
TX (X) -1	42
TX (Y) -1	41
RX (X) -1	40
RX (Y) -1	39
TX/RX-GND	38
RCP-POW (+) -out	37
RCP-POW (+) -out	36
RCP-POW (GND) -out	35
RCP-POW (GND) -out	34
GND	33
(AUX-3)	32
(AUX-2)	31
(AUX-1)	30
422RX1 (X) /232RX1	29
422RX1 (Y)	28
422RX0 (Y)	27
422RX0 (X) /232RX0	26
422TX0 (X) /232TX0	25
422TX0 (Y)	24
422TX1 (Y)	23
422TX1 (X) /232TX1	22
GND	21
SEQ CONT out1 (X)	20
Stair CASE out1 (X)	19
GND	18
GND	17
GND	16
MIC1 (X) out	15
MIC1 (Y) out	14
MIC1 (G)	13
GND	12
GND	11
GND	10
MIC2 (X) out	9
MIC2 (Y) out	8
MIC2 (G)	7
GND	6
GND	5
GND	4
GND	3
GND	2
GND	1

CN12

REF (X) -in	1
REF (G) -in	2

CN-2675
BOARD NO. 1-867-896-11, 31
HDCU1500_CN-2675_011_1

CN-2676, CN-2677, CN-2718, CN-2805
SUFFIX: -11, -31 SUFFIX: -11, -31 SUFFIX: -11, -31 SUFFIX: -11, -31

MIC1 (RTS1)

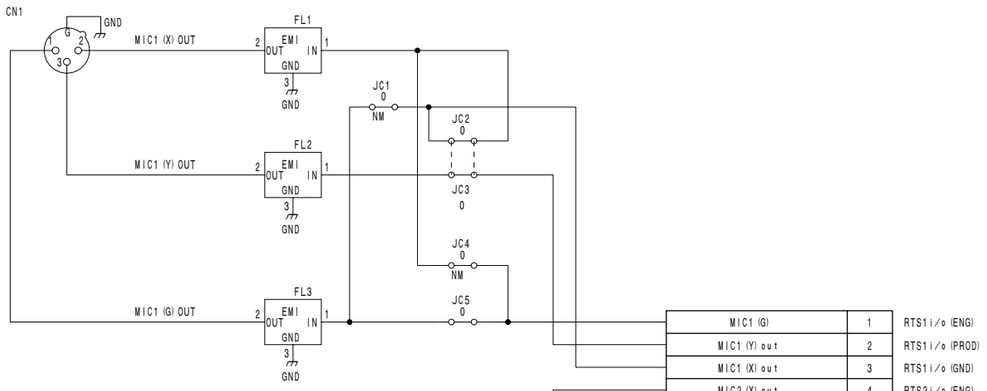

MIC2 (RTS2)

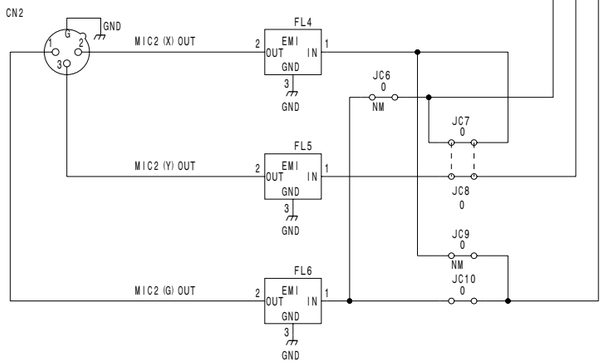

CN-2676

BOARD NO. 1-867-897-11, 31

HDCU1500_CN-2676_011_1

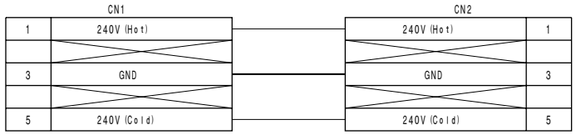

CN-2718

BOARD NO. 1-867-875-11, 31

HDCU1000_CN-2718_011_1

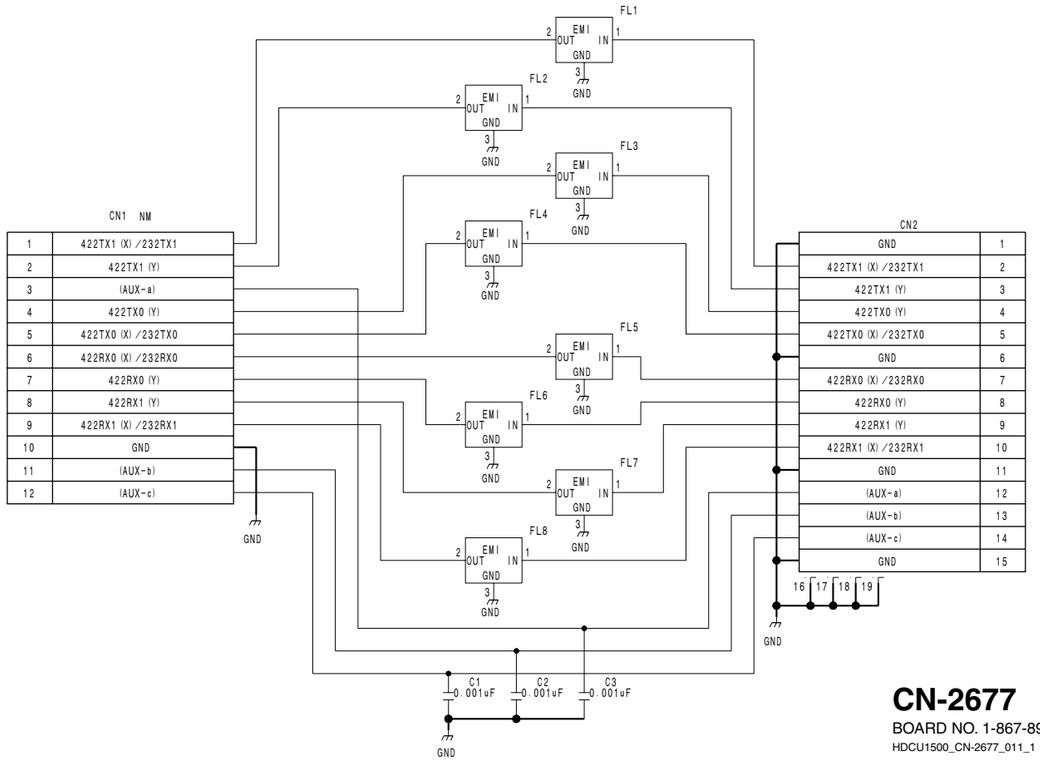

CN-2677

BOARD NO. 1-867-898-11, 31

HDCU1500_CN-2677_011_1

TRUNK

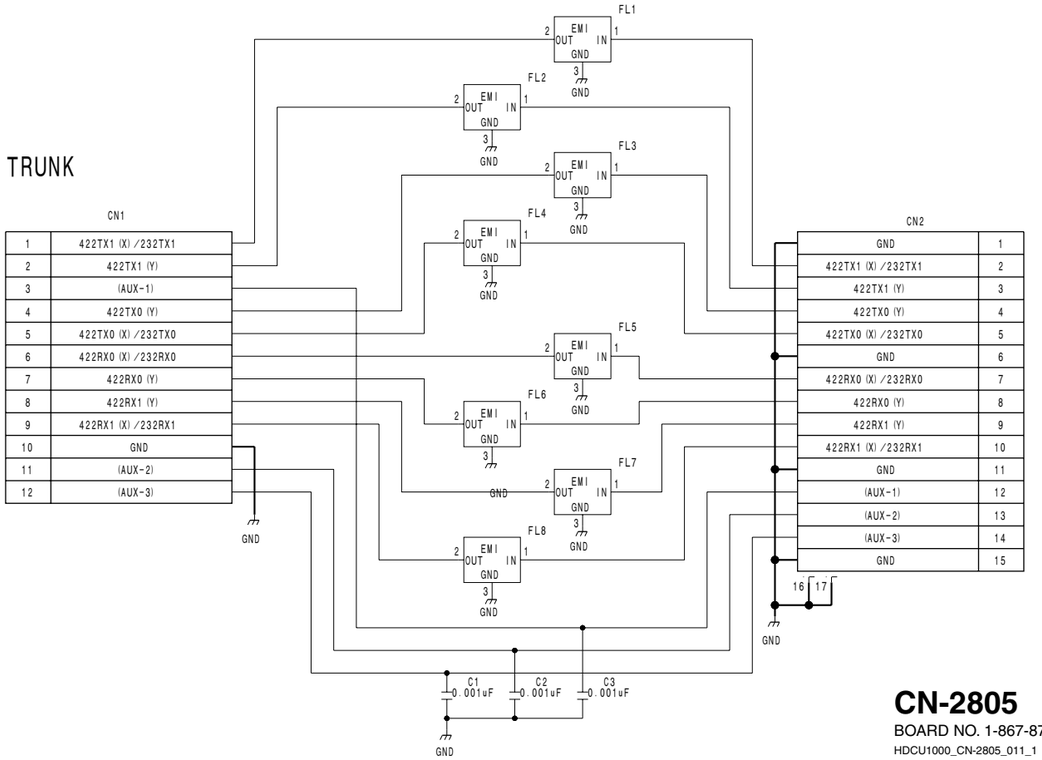

CN-2805

BOARD NO. 1-867-873-11, 31

HDCU1000_CN-2805_011_1

7-30

CN-2678, CN-2700
SUFFIX: -11, -12

1 : Talk-Y
2 : Talk-X
3 : GND
4 : Receive
5 : PGM

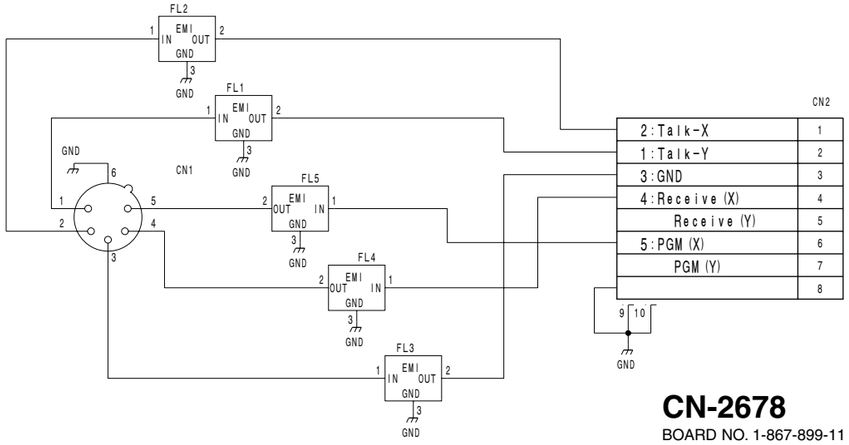

CN-2678

BOARD NO. 1-867-899-11

HDCU1500_CN-2678_011_1

1 : Talk-Y
2 : Talk-X
3 : GND
4 : Receive
5 : PGM

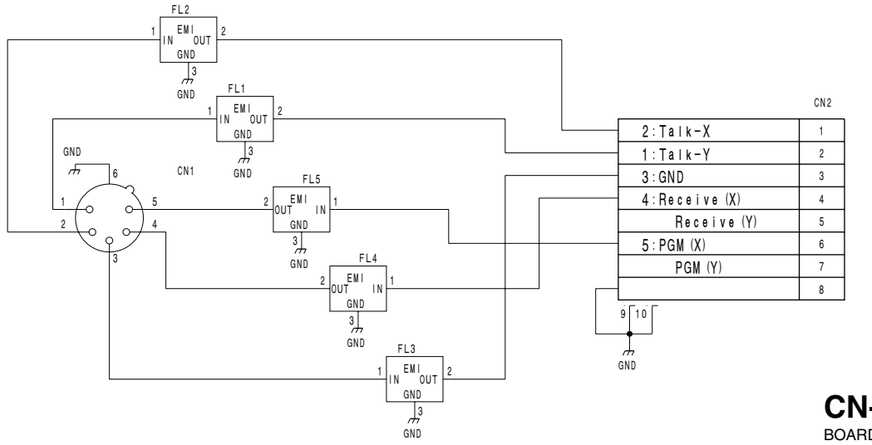

CN-2700

BOARD NO. 1-867-874-11

HDCU1000_CN-2700_011_1

1 : Talk-Y
2 : Talk-X
3 : GND
4 : Receive
5 : PGM

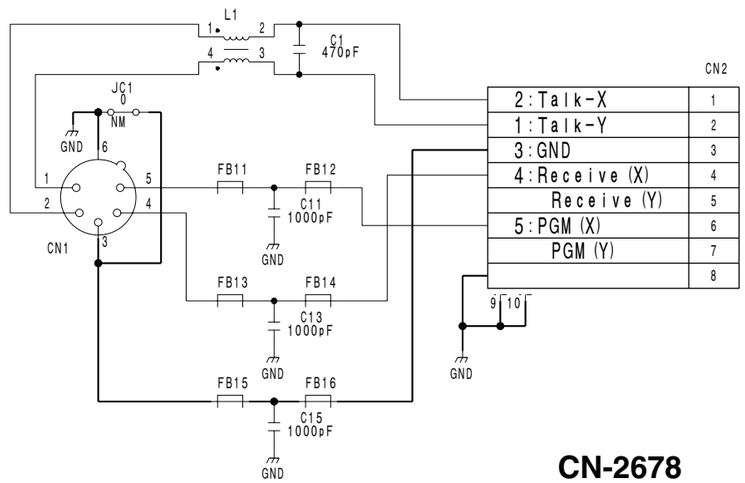

CN-2678

BOARD NO. 1-867-899-12

HDCU1500_CN-2678_012_1

1 : Talk-Y
2 : Talk-X
3 : GND
4 : Receive
5 : PGM

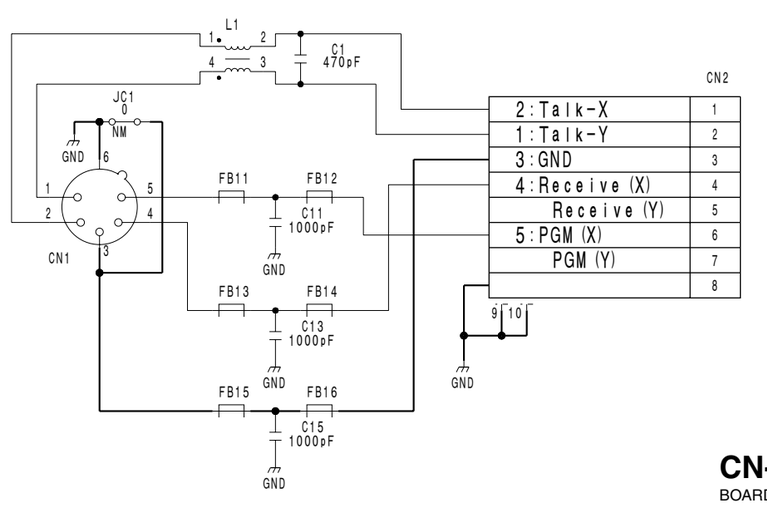

CN-2700

BOARD NO. 1-867-874-12

HDCU1000_CN-2700_012_1

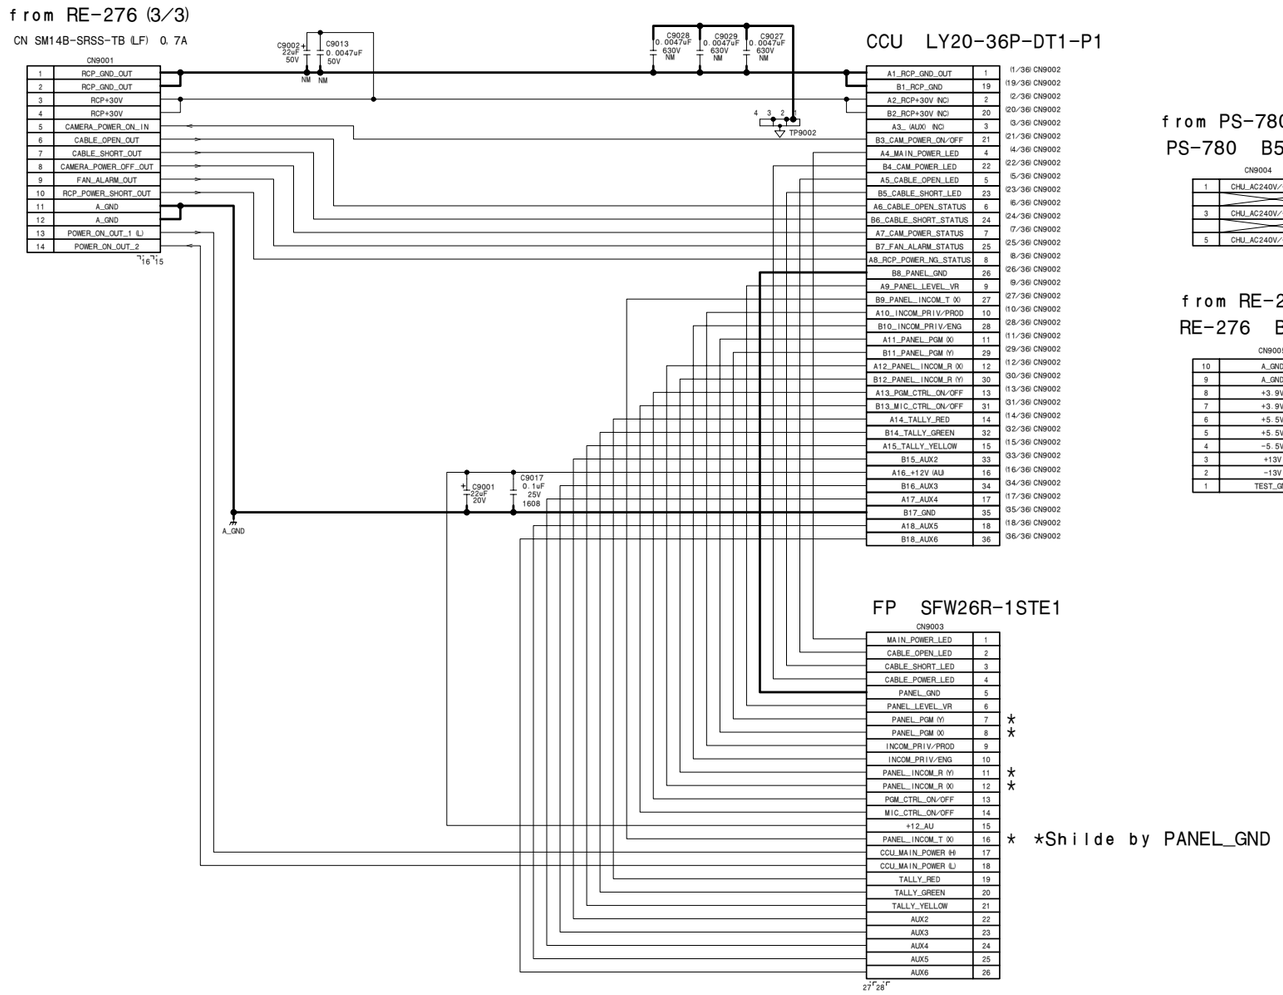

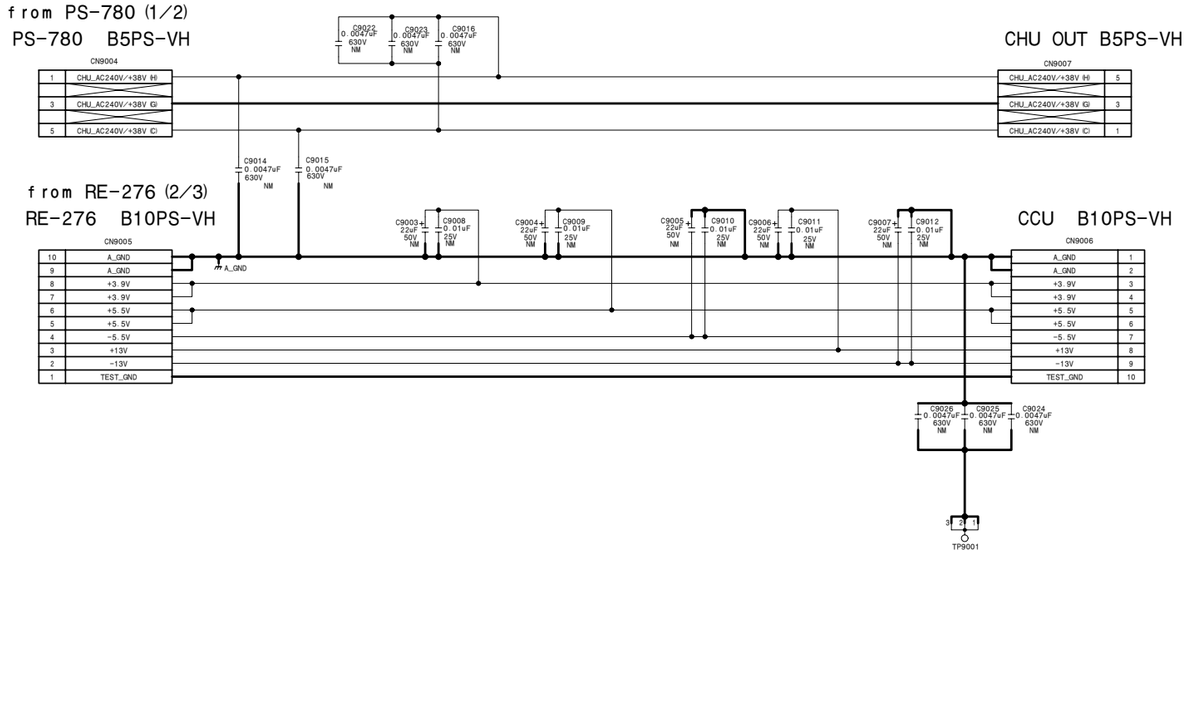

CN-3275
BOARD NO. 1-881-967-11
CAX-183-A10_CN-3275_11S_1

CNB-21 (1/2)
SUFFIX: -11, -31

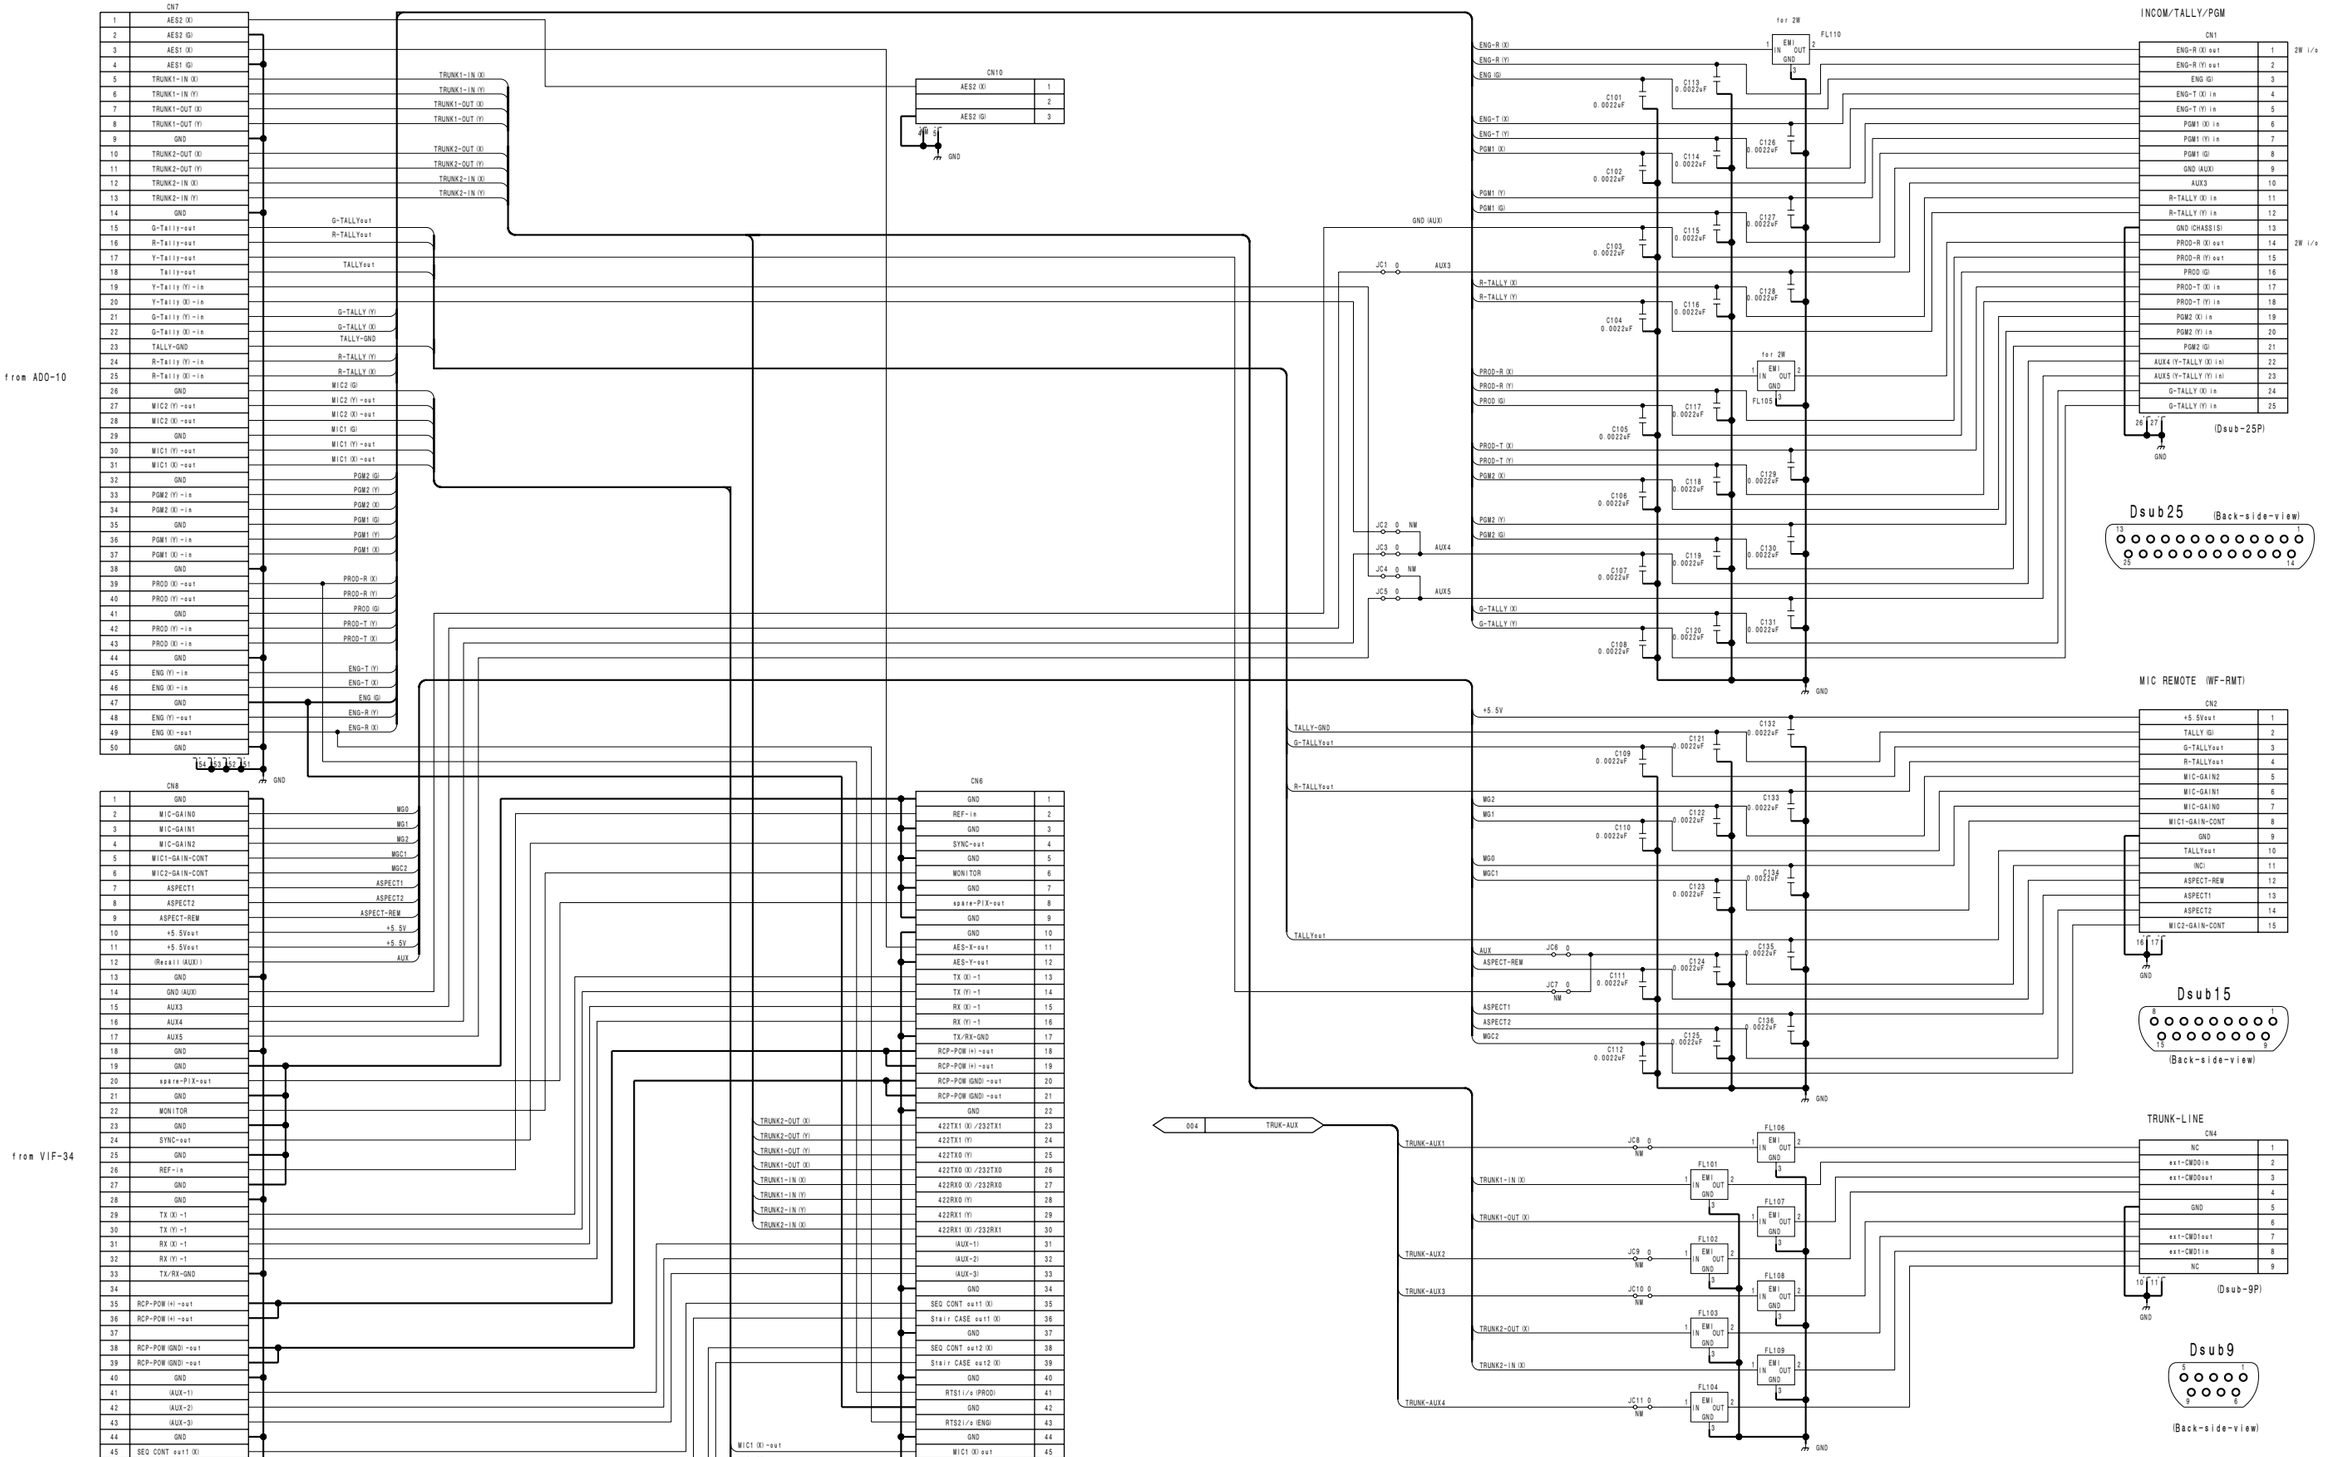

CNB-21 (1/2)
BOARD NO. 1-867-889-11, 31
HDCU1000_CNB-21_011_1

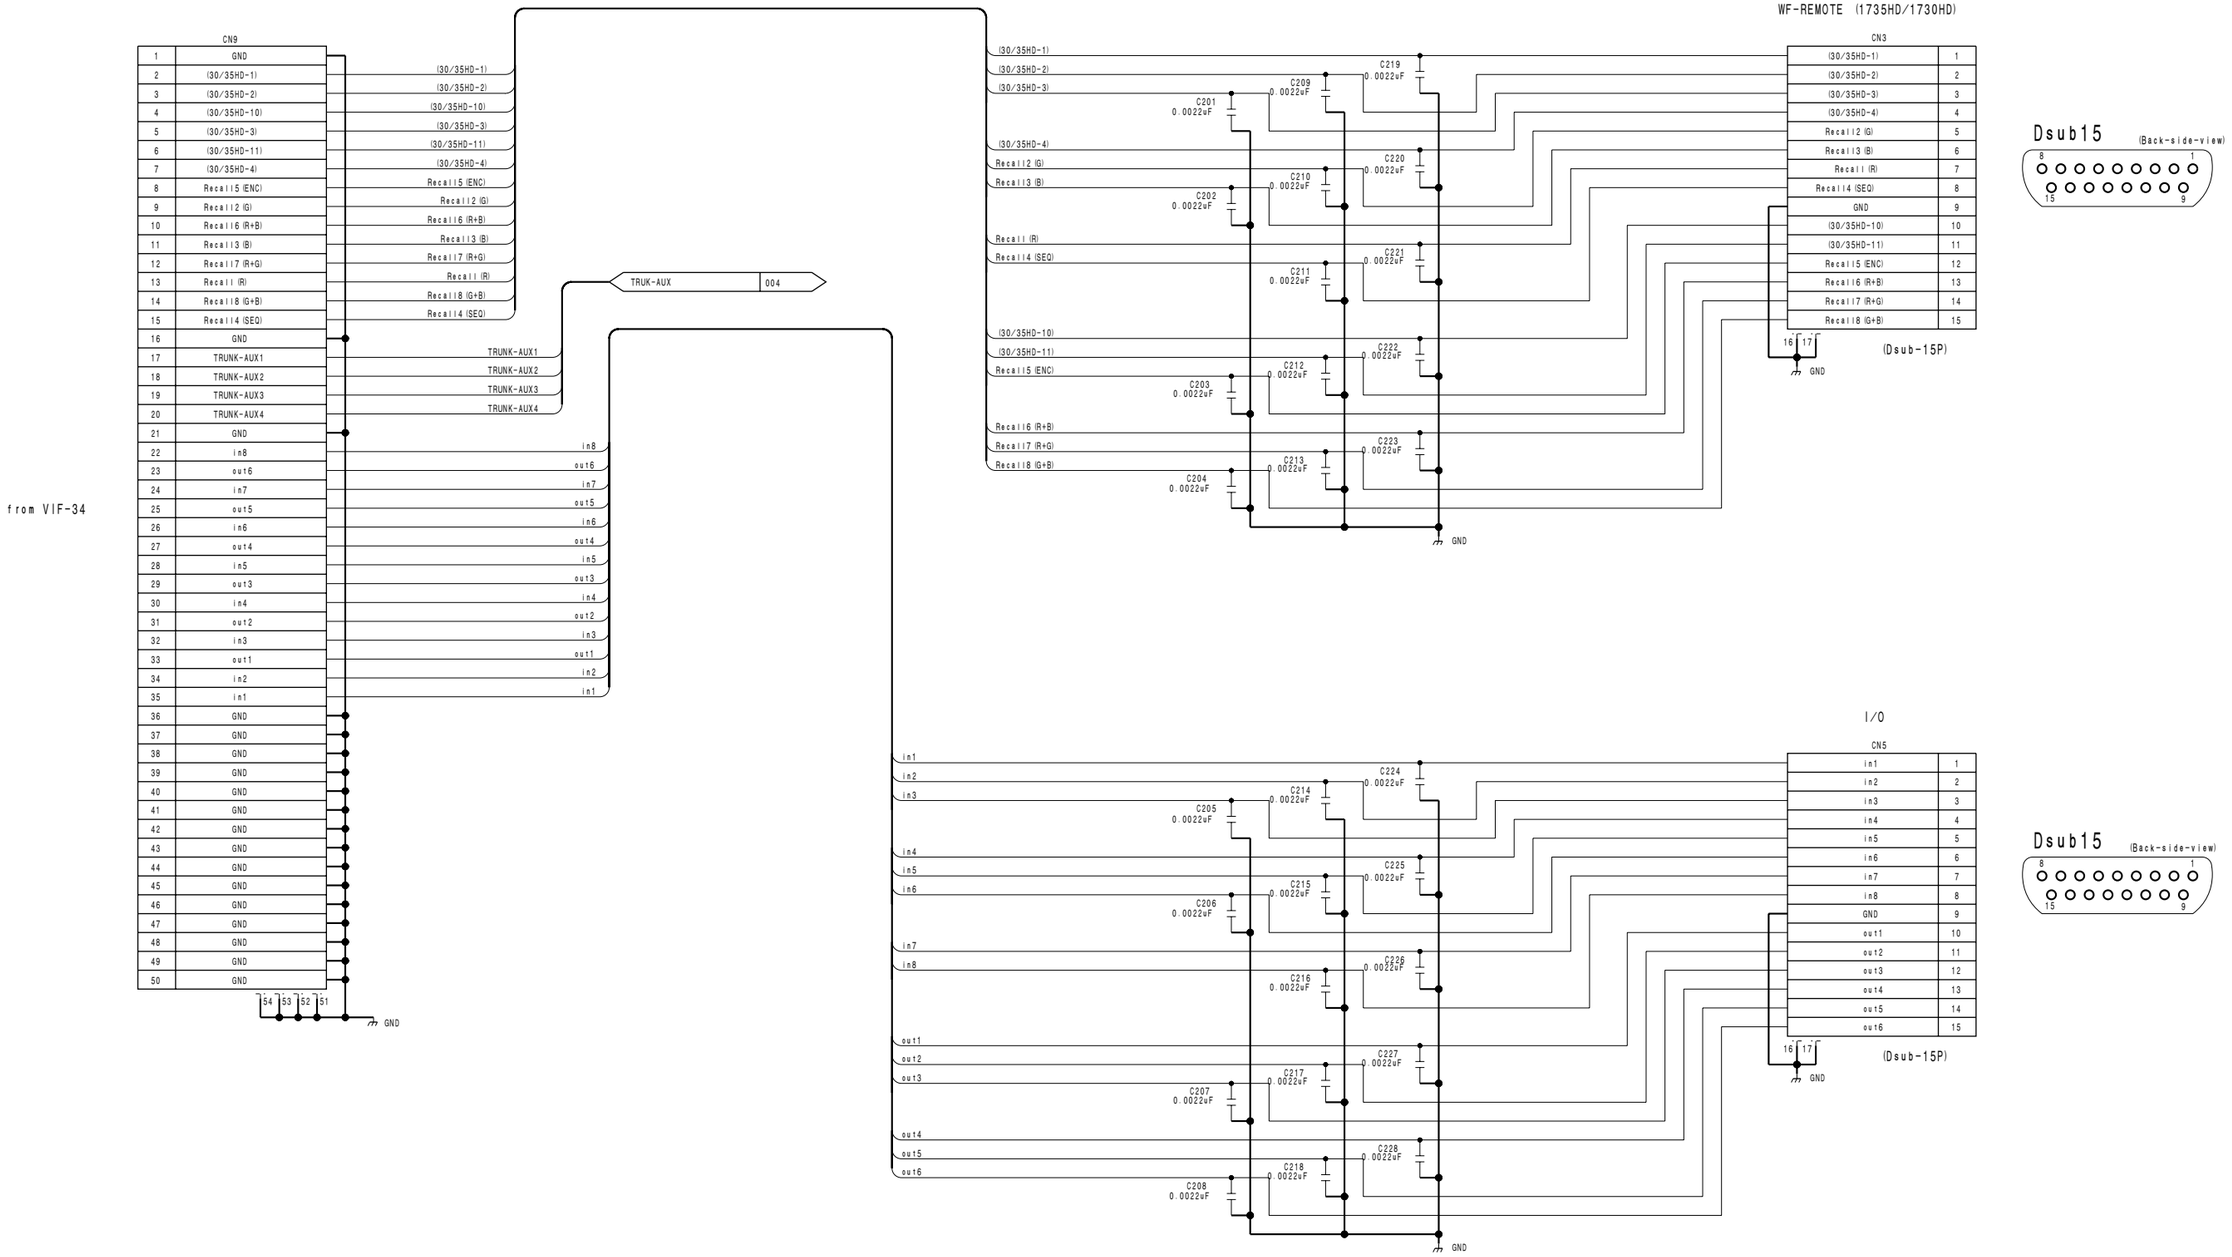

CNB-21 (2/2)

BOARD NO. 1-867-889-11, 31

HDCU1000_CNB-21_011_2

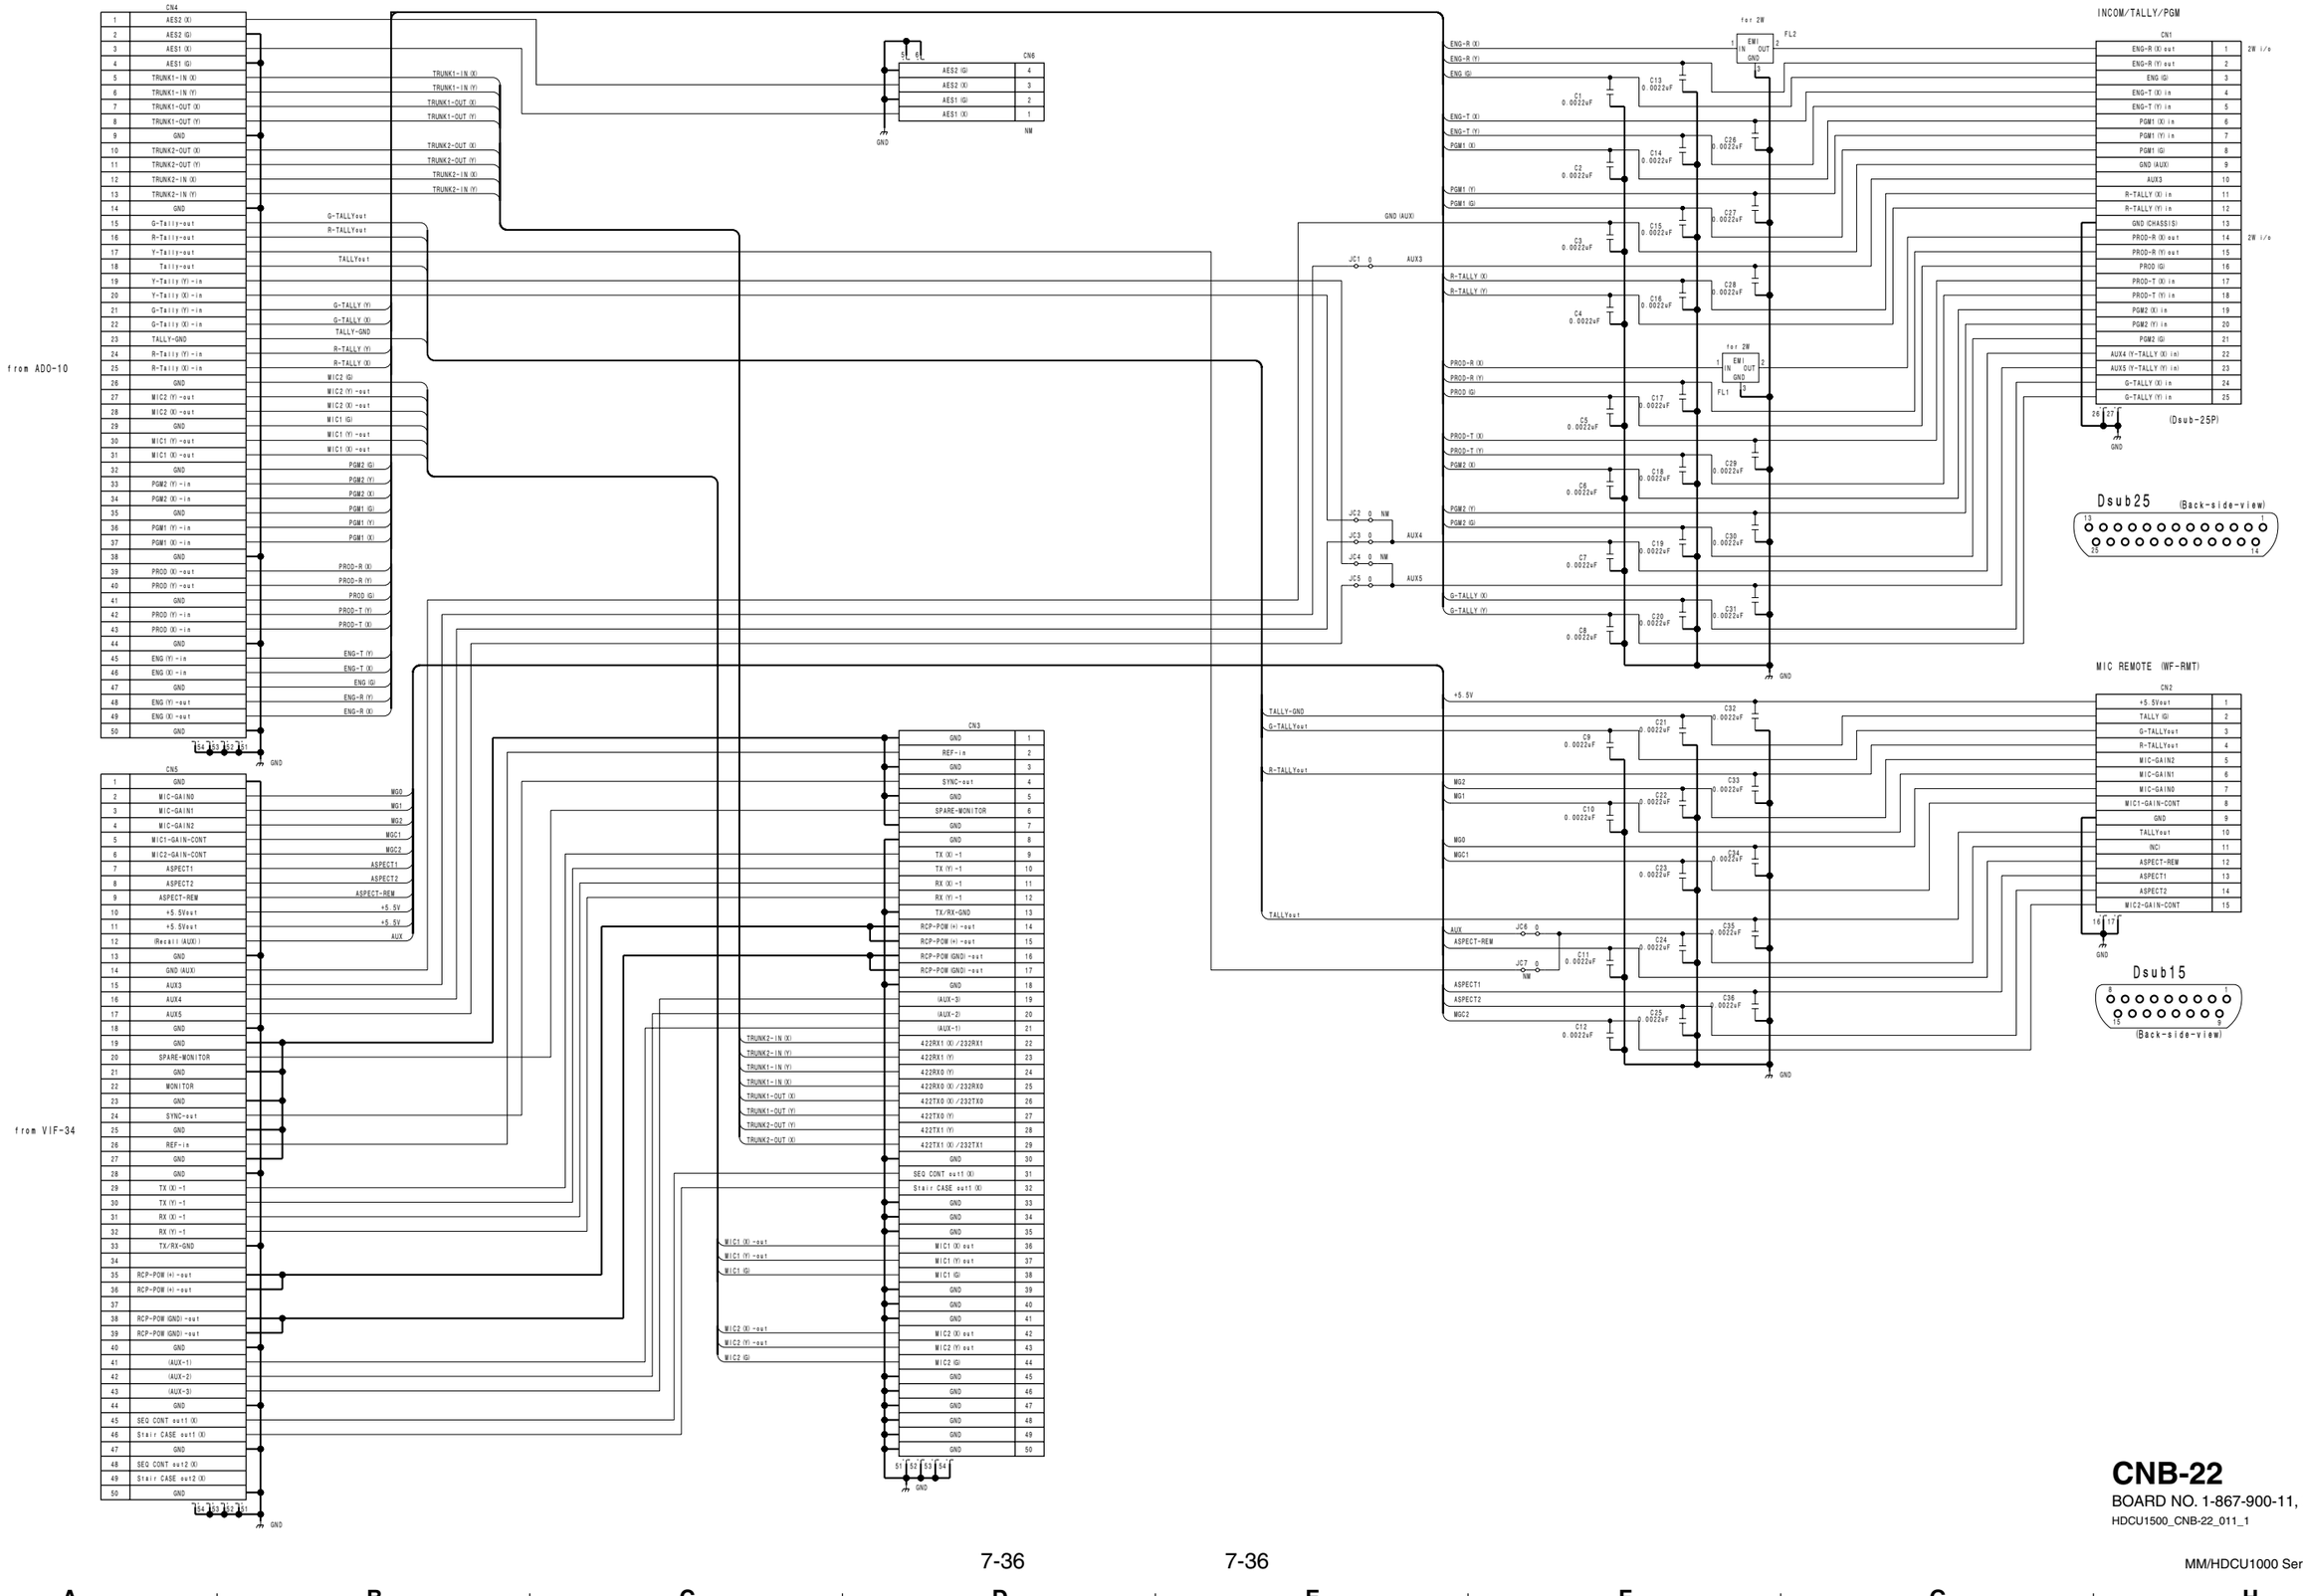

CNB-22
BOARD NO. 1-867-900-11, 31
HDCU1500_CNB-22_011_1

DRX-5 (1/9)
SUFFIX: -11, -12, -13, -14, -31

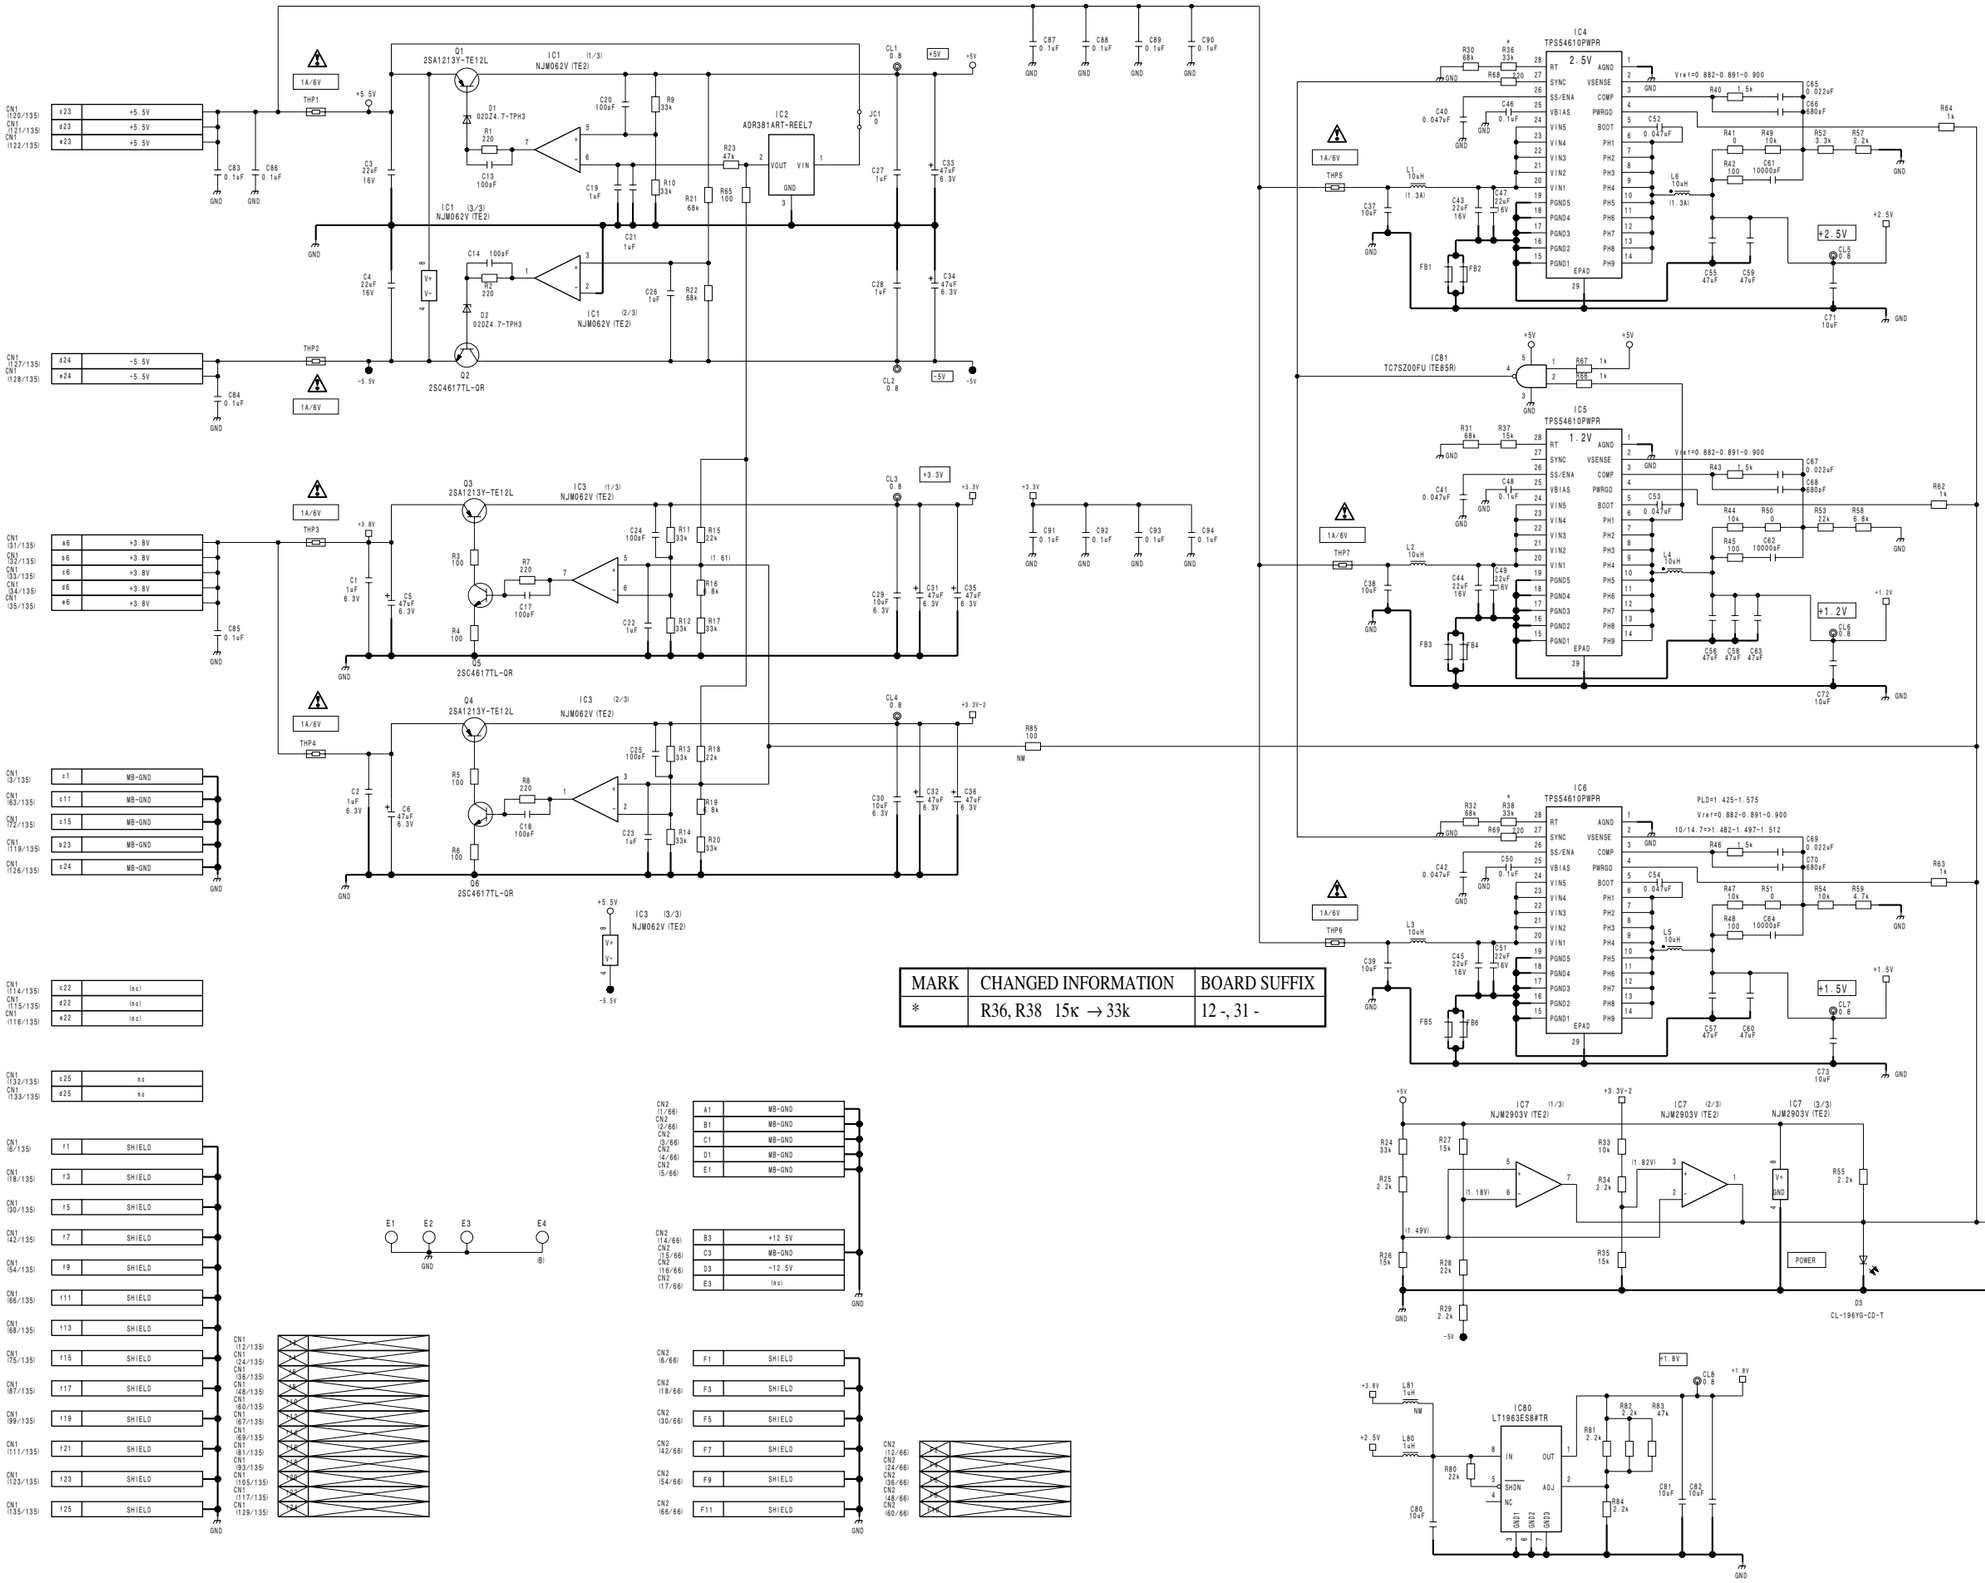

MARK	CHANGED INFORMATION	BOARD SUFFIX
*	R36, R38 15κ → 33k	12 -, 31 -

DRX-5 (1/9)

BOARD NO. 1-867-880-11, 12, 13, 14, 31

HDCU1000_DRX-5_012_1

DRX-5 (2/9)
SUFFIX: -11

7-38

DRX-5 (2/9)
BOARD NO. 1-867-880-11
HDCU1000_DRX-5_012_2

DRX-5 (2/9)
SUFFIX: -12. -13, -14, -31

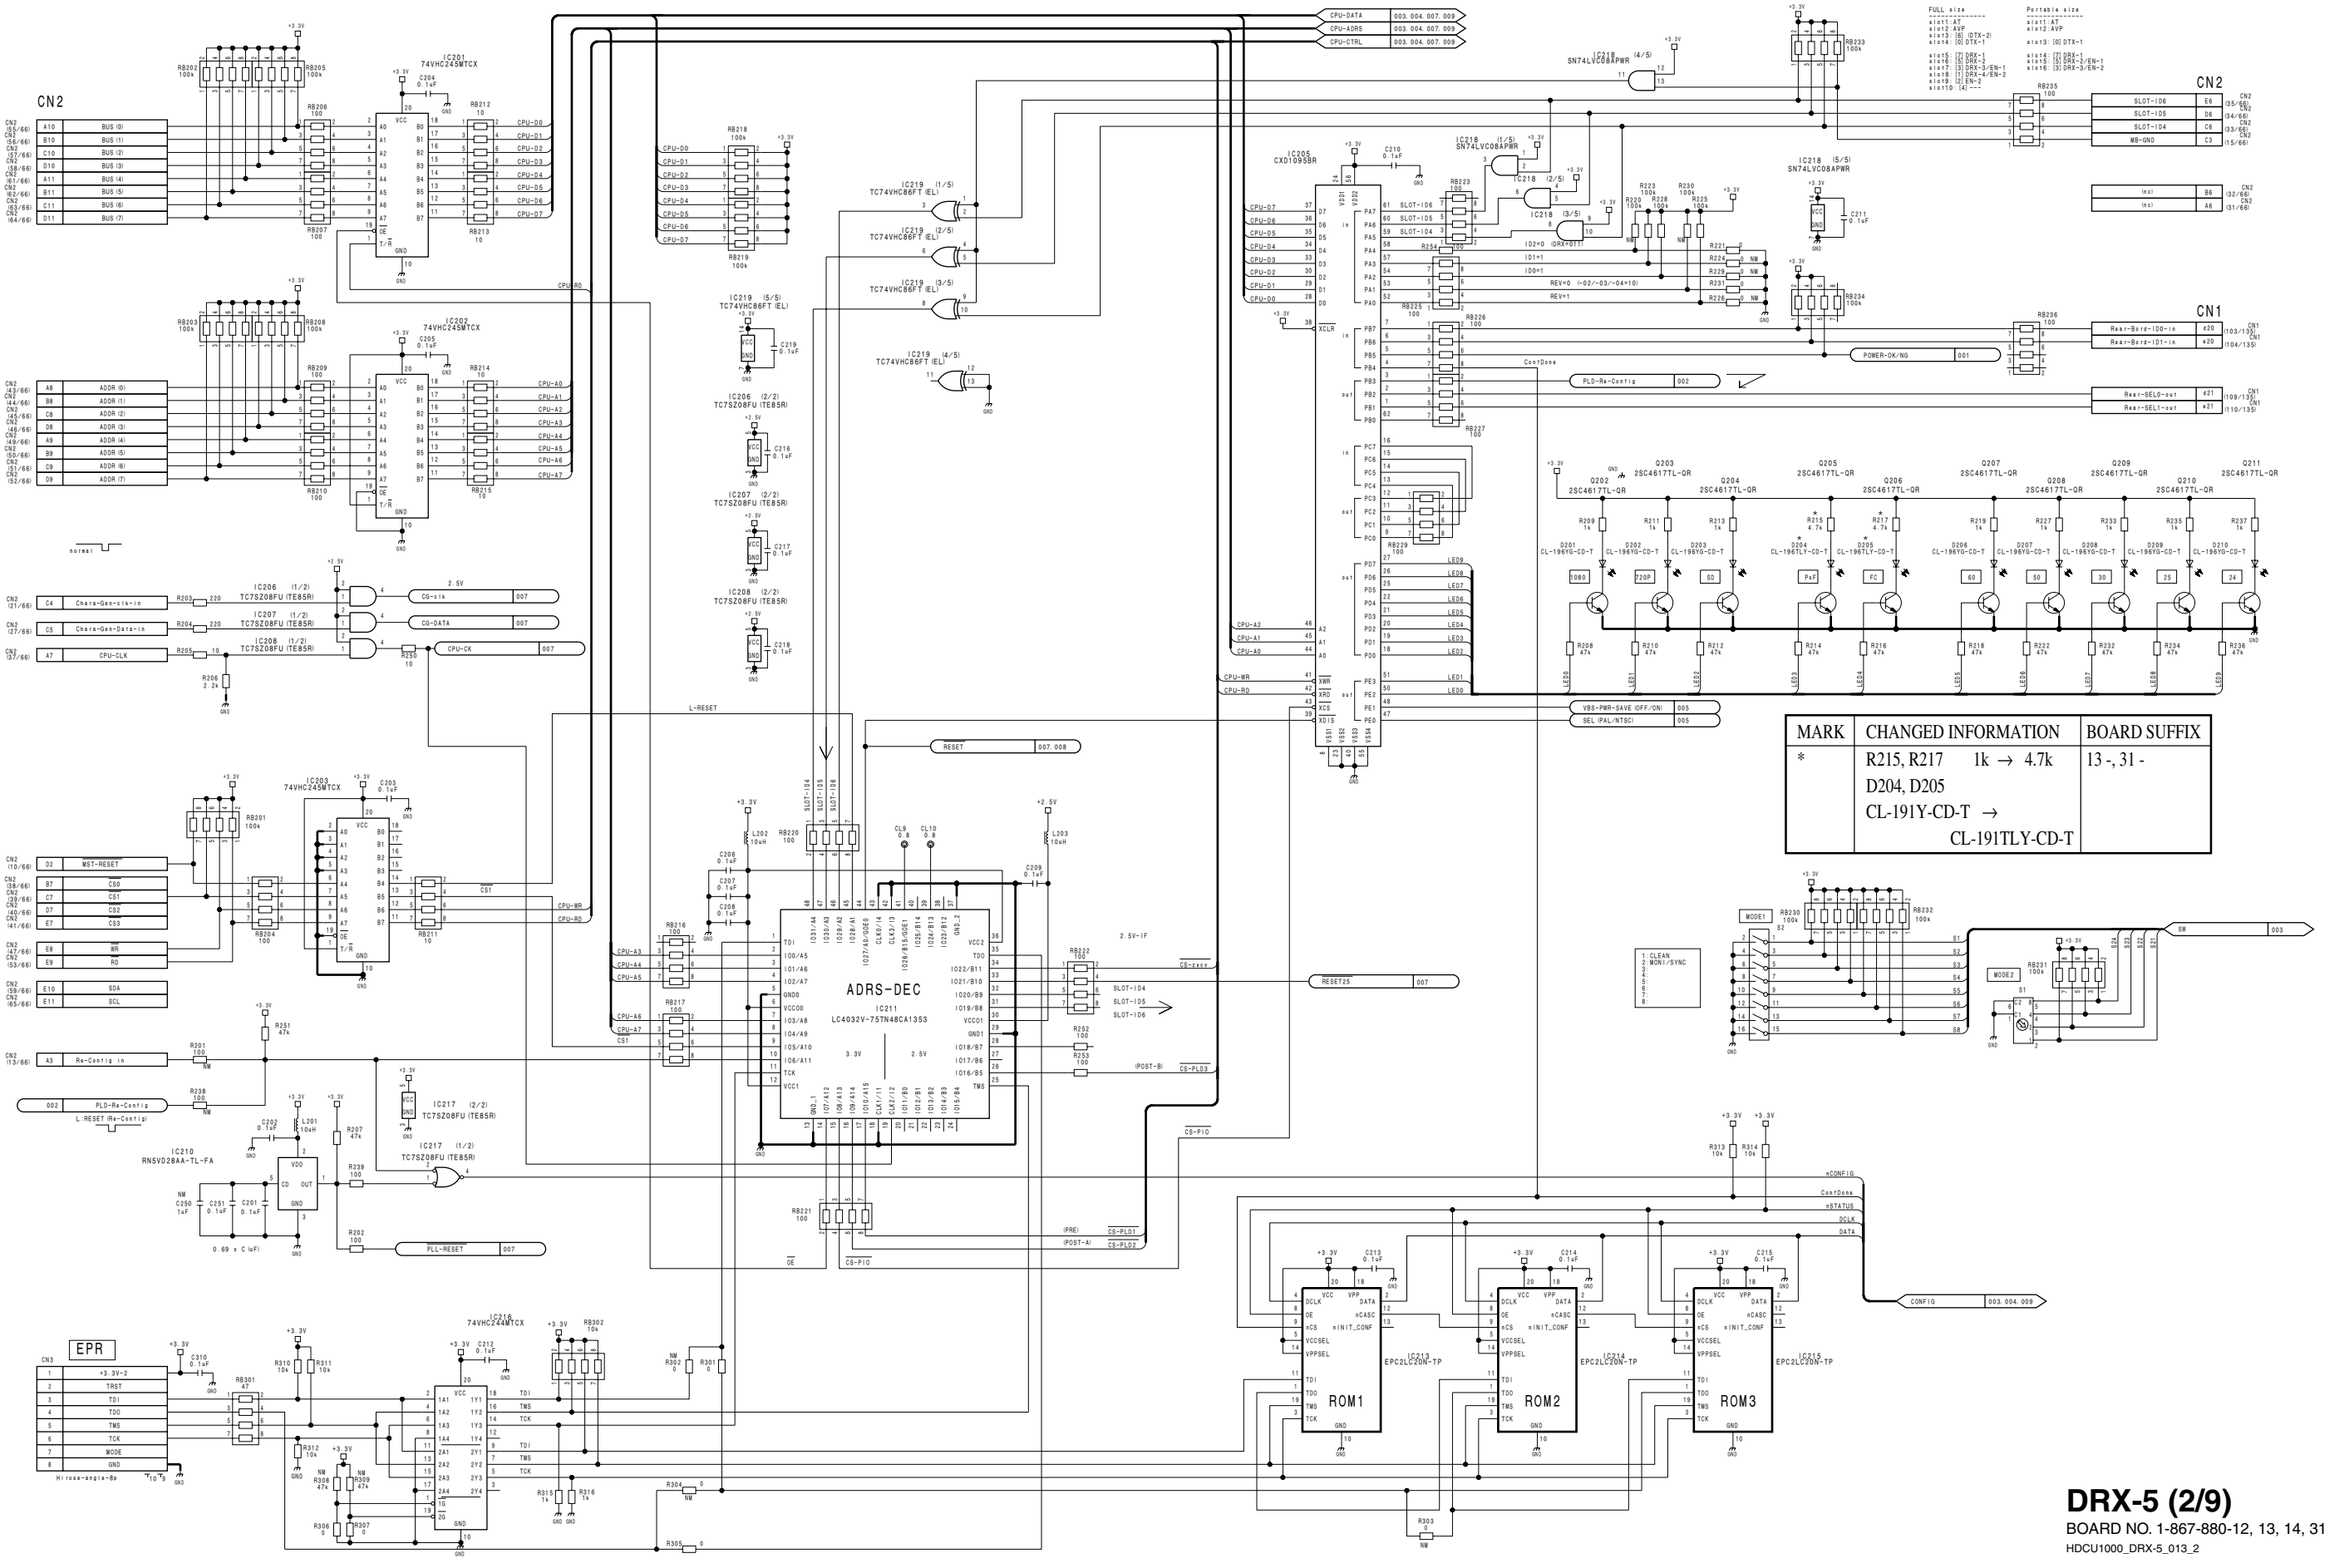

MARK	CHANGED INFORMATION	BOARD SUFFIX
*	R215, R217 1k → 4.7k D204, D205 CL-191Y-CD-T → CL-191TLY-CD-T	13 -, 31 -

DRX-5 (3/9)

SUFFIX: -11, -12, -13, -14, -31

DRX-5 (3/9)
SUFFIX: -11, -12, -13, -14, -31

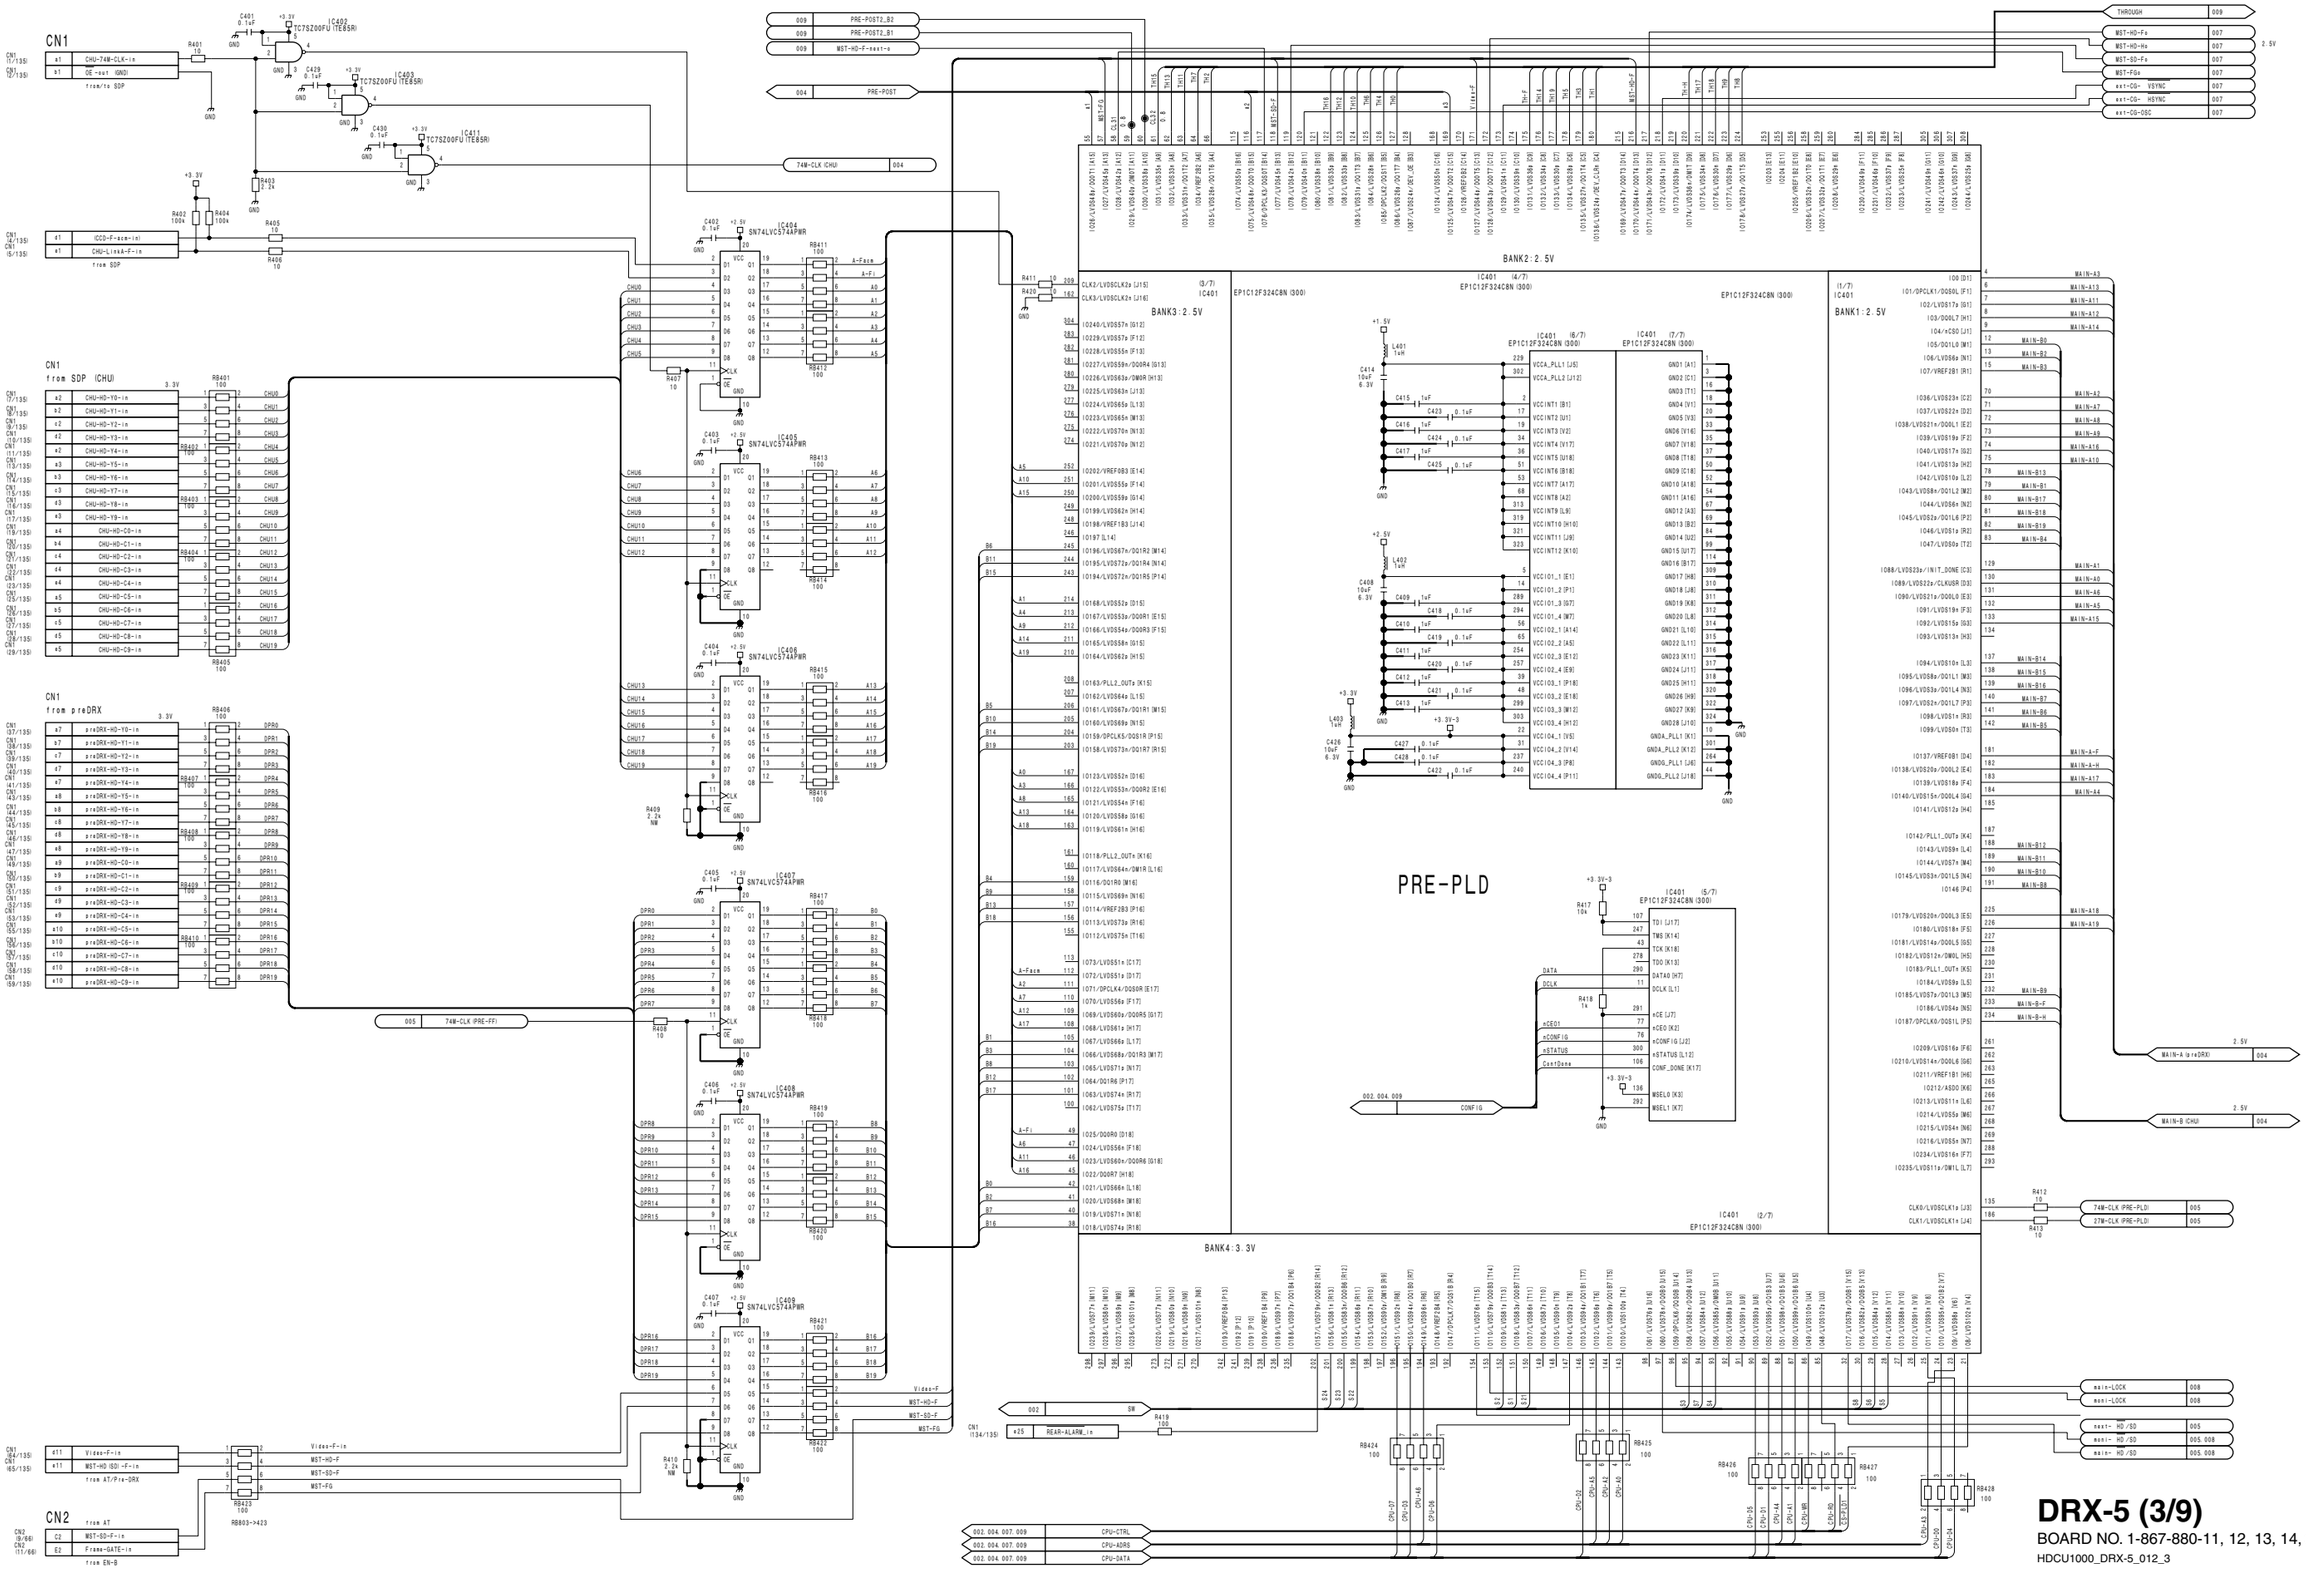

MM/HDCU1000 Series

7-41

DRX-5 (3/9)

BOARD NO. 1-867-880-11, 12, 13, 14, 31

HDCU1000_DRX-5_012_3

DRX-5 (4/9)

SUFFIX: -11, -12, -13, -14, -31

DRX-5 (4/9)

SUFFIX: -11, -12, -13, -14, -31

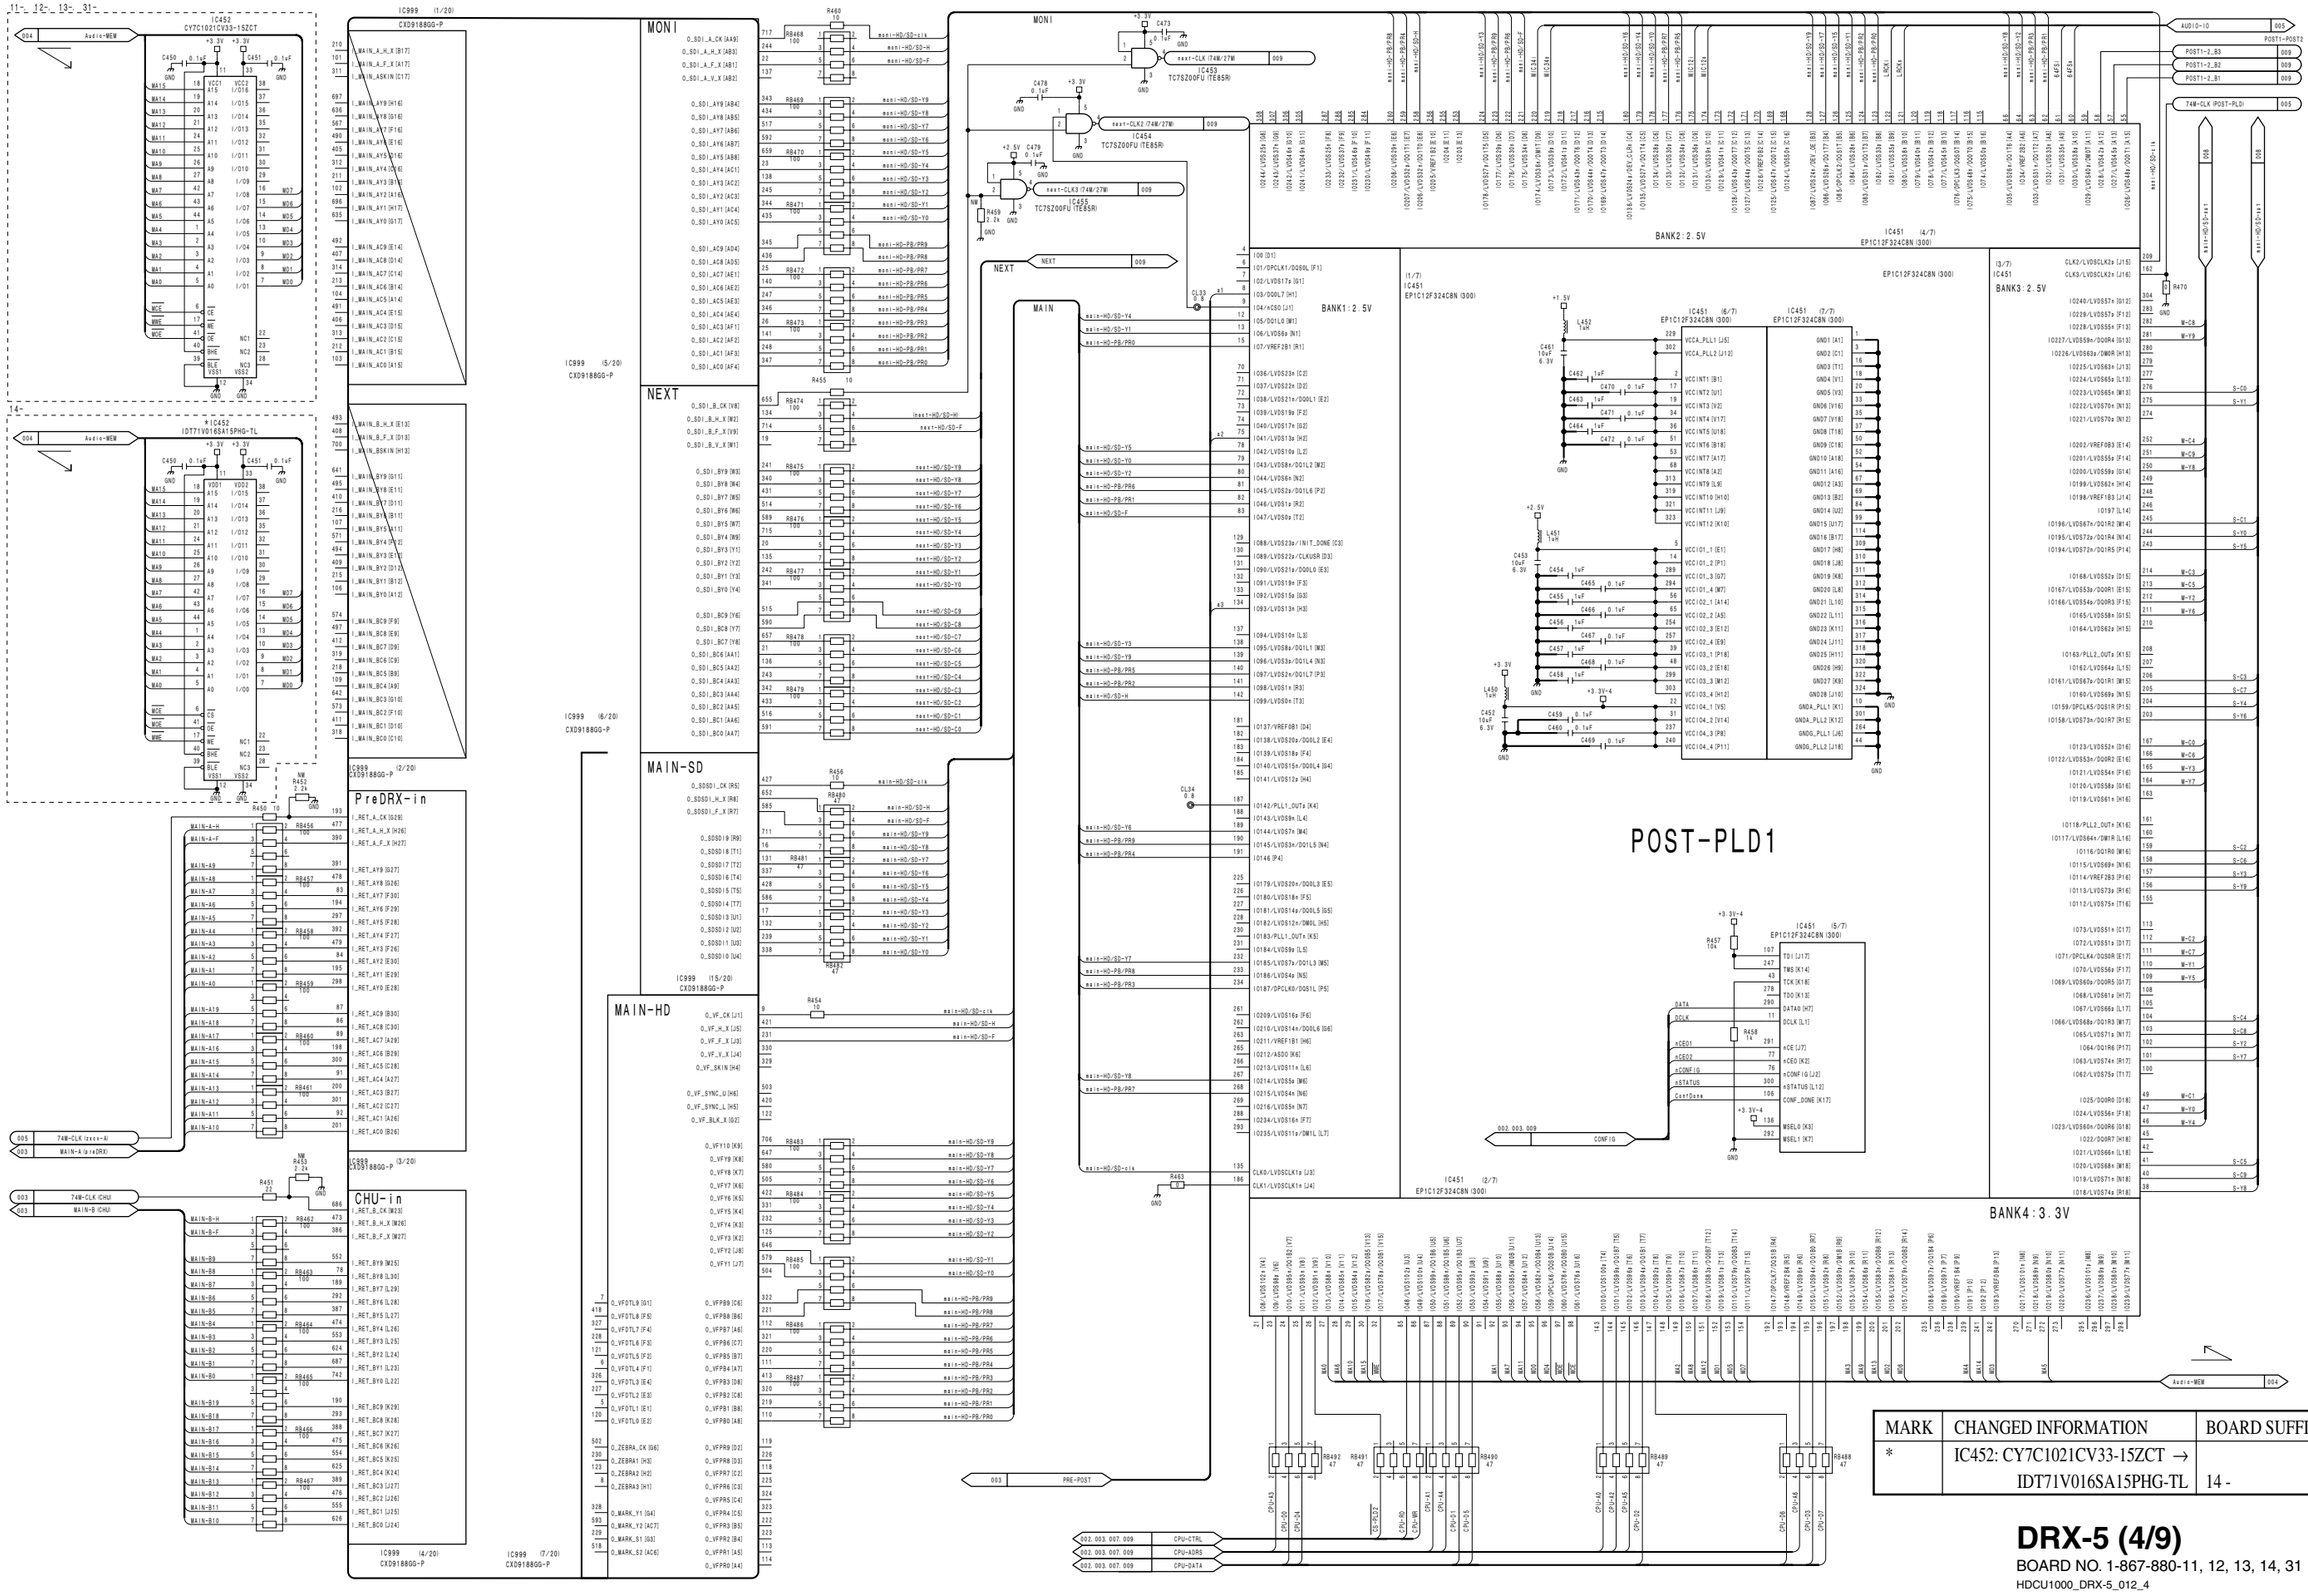

MARK	CHANGED INFORMATION	BOARD SUFFIX
*	IC452: CY7C1021CV33-15ZCT → IDT71V016SA15PHG-TL	14 -

DRX-5 (4/9)

BOARD NO. 1-867-880-11, 12, 13, 14, 31

HDCU1000_DRX-5_012_4

DRX-5 (5/9)
SUFFIX: -11, -12, -13, -14, -31

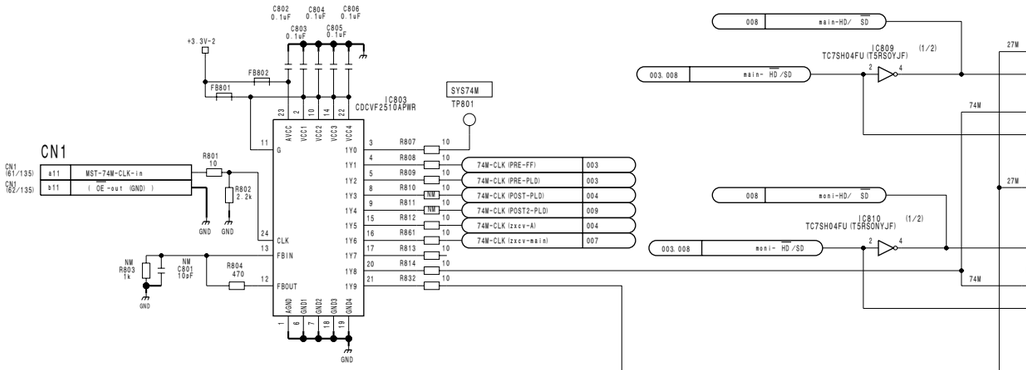

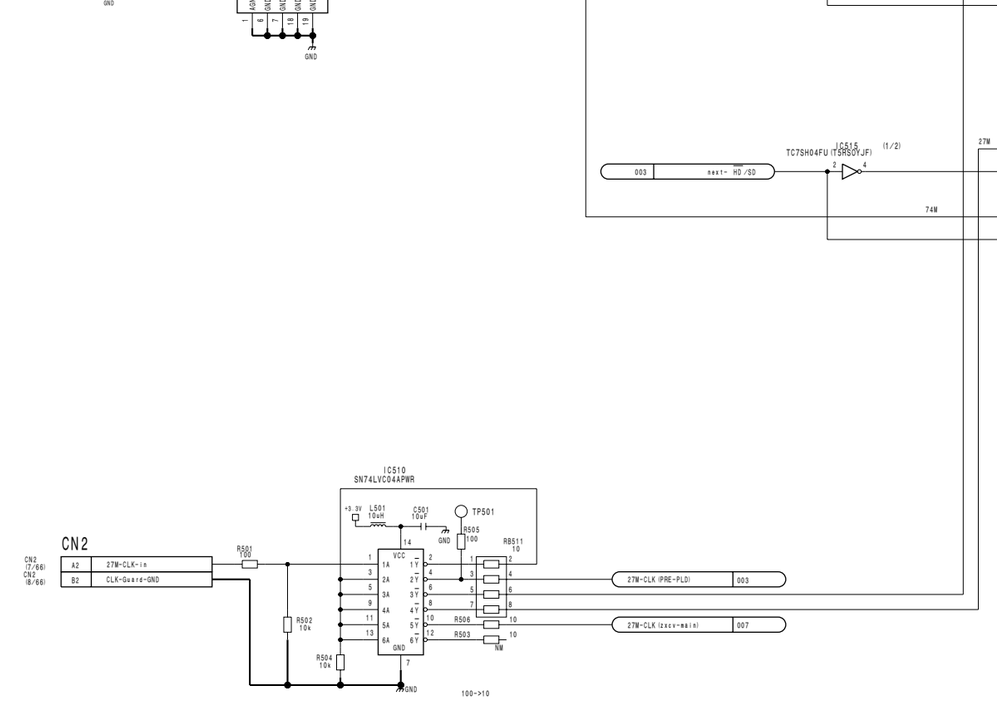

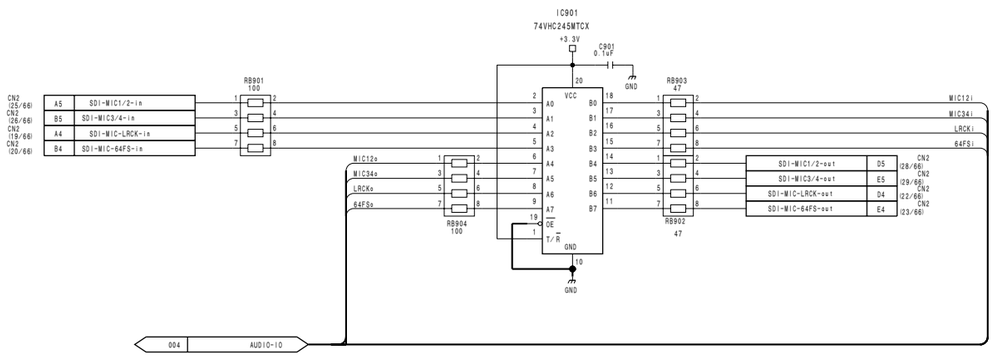

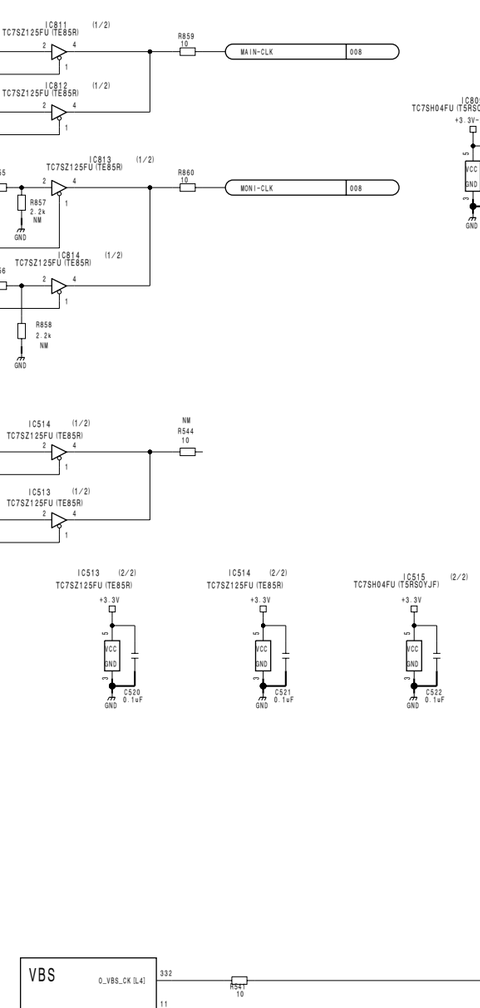

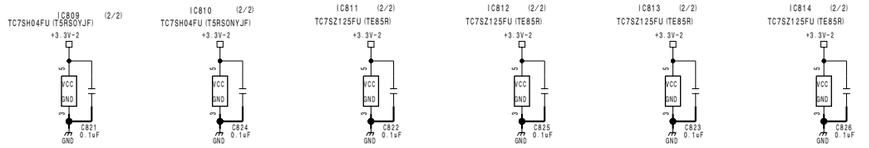

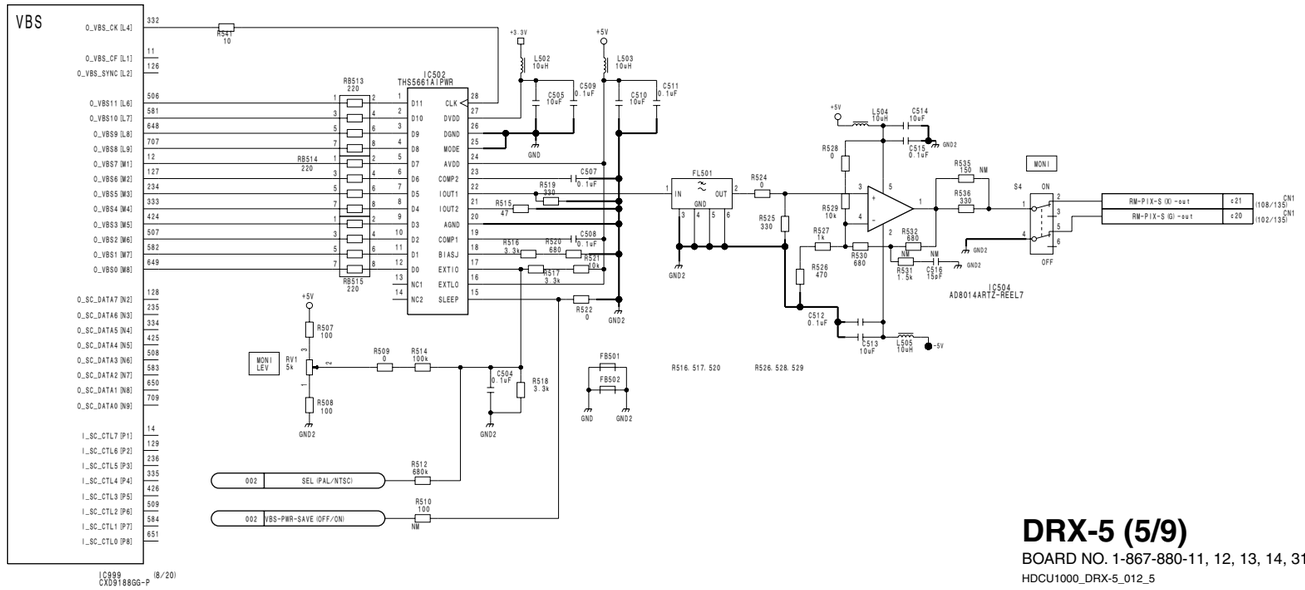

7-43

DRX-5 (5/9)
BOARD NO. 1-867-880-11, 12, 13, 14, 31
HDCU1000_DRX-5_012_5

DRX-5 (6/9)
SUFFIX: -11, -12, -13, -14, -31

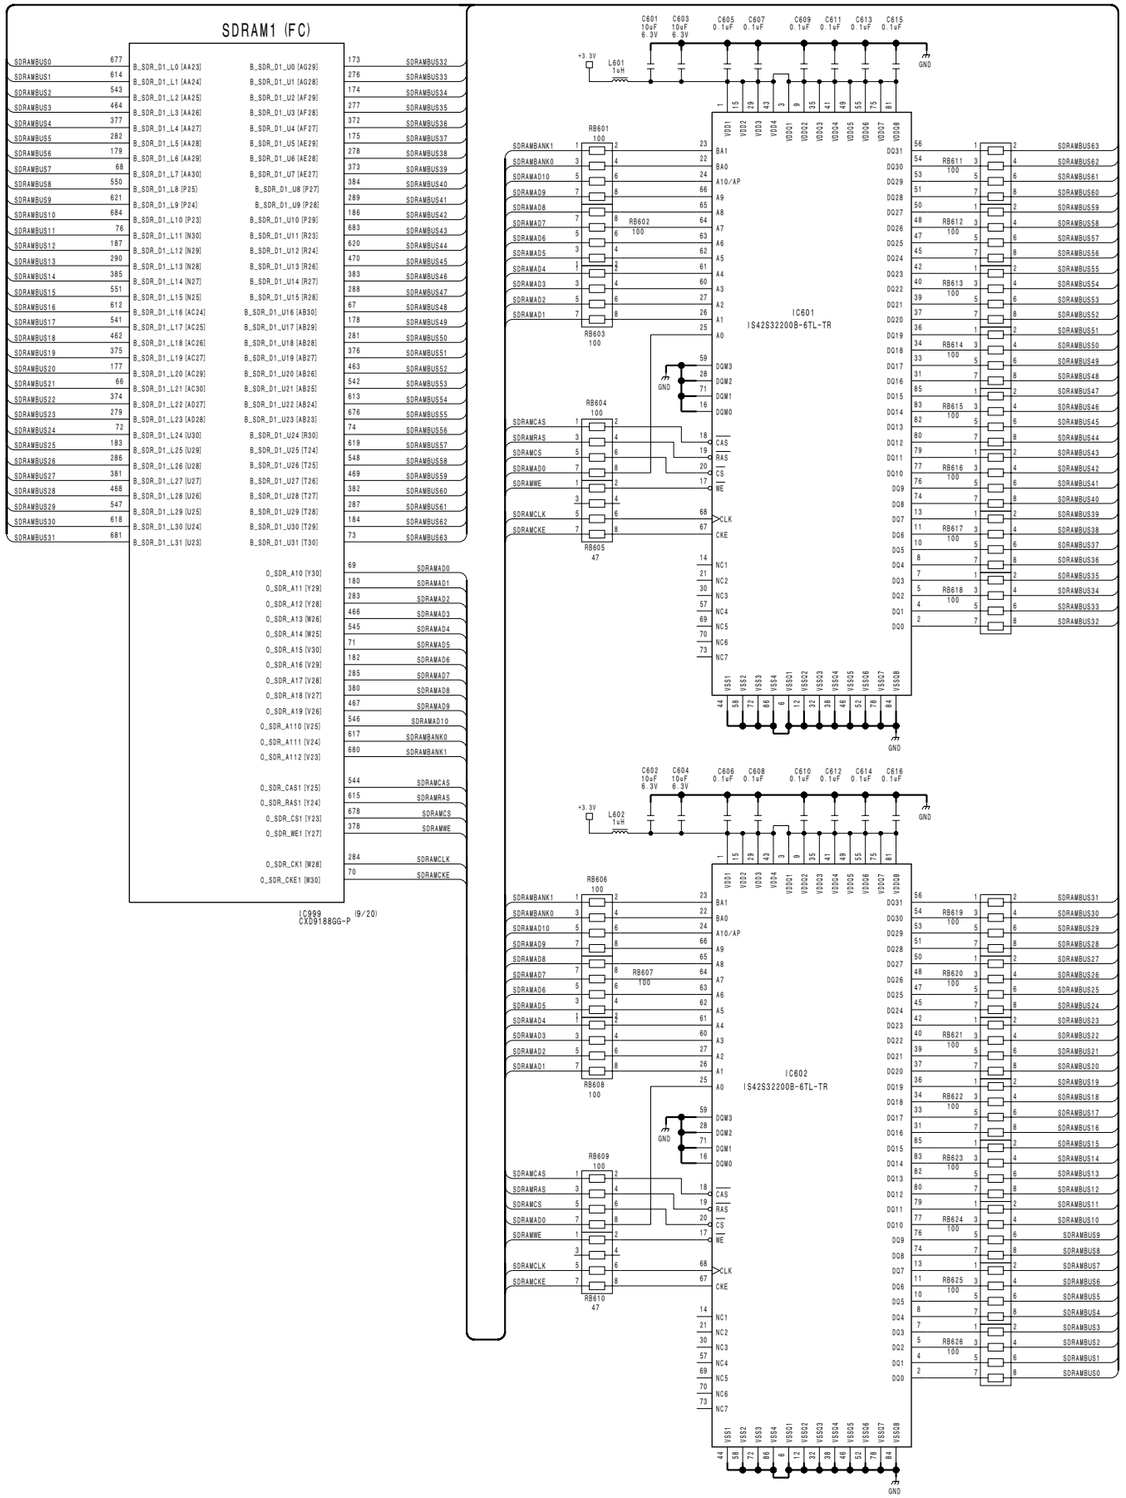

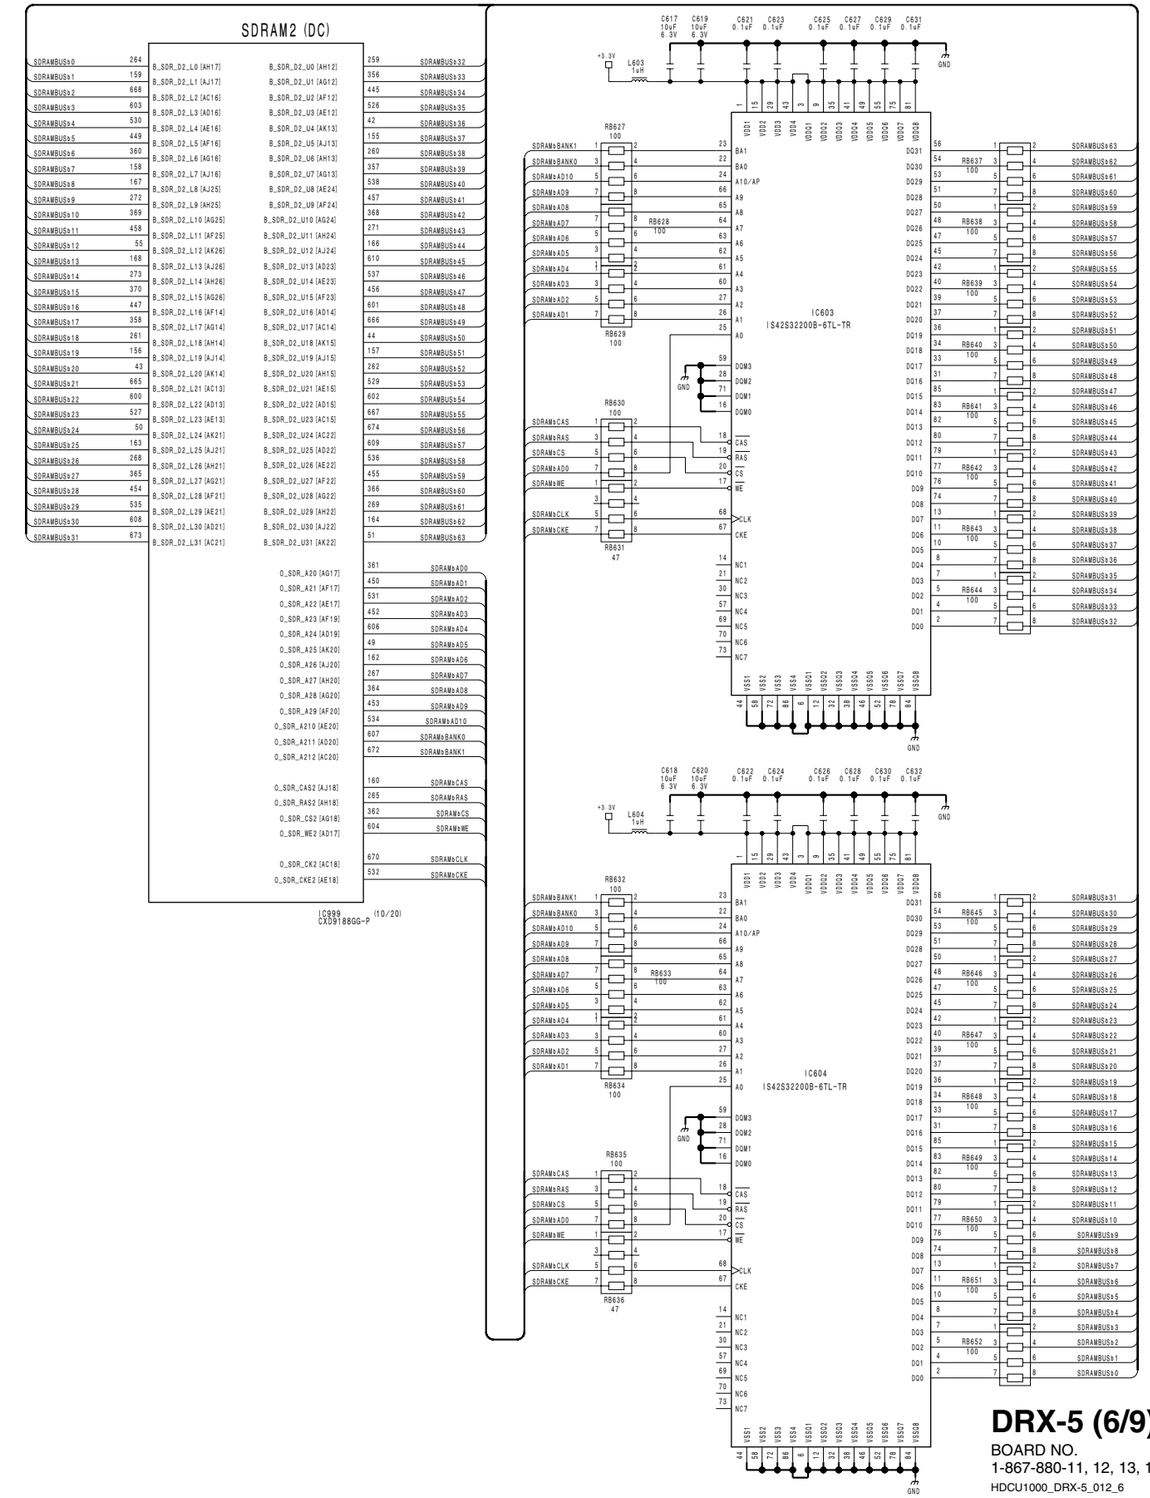

7-44

DRX-5 (6/9)
BOARD NO.
1-867-880-11, 12, 13, 14, 31
HDCU1000_DRX-5_012_6

DRX-5 (7/9)
SUFFIX: -11, -12, -13, -14, -31

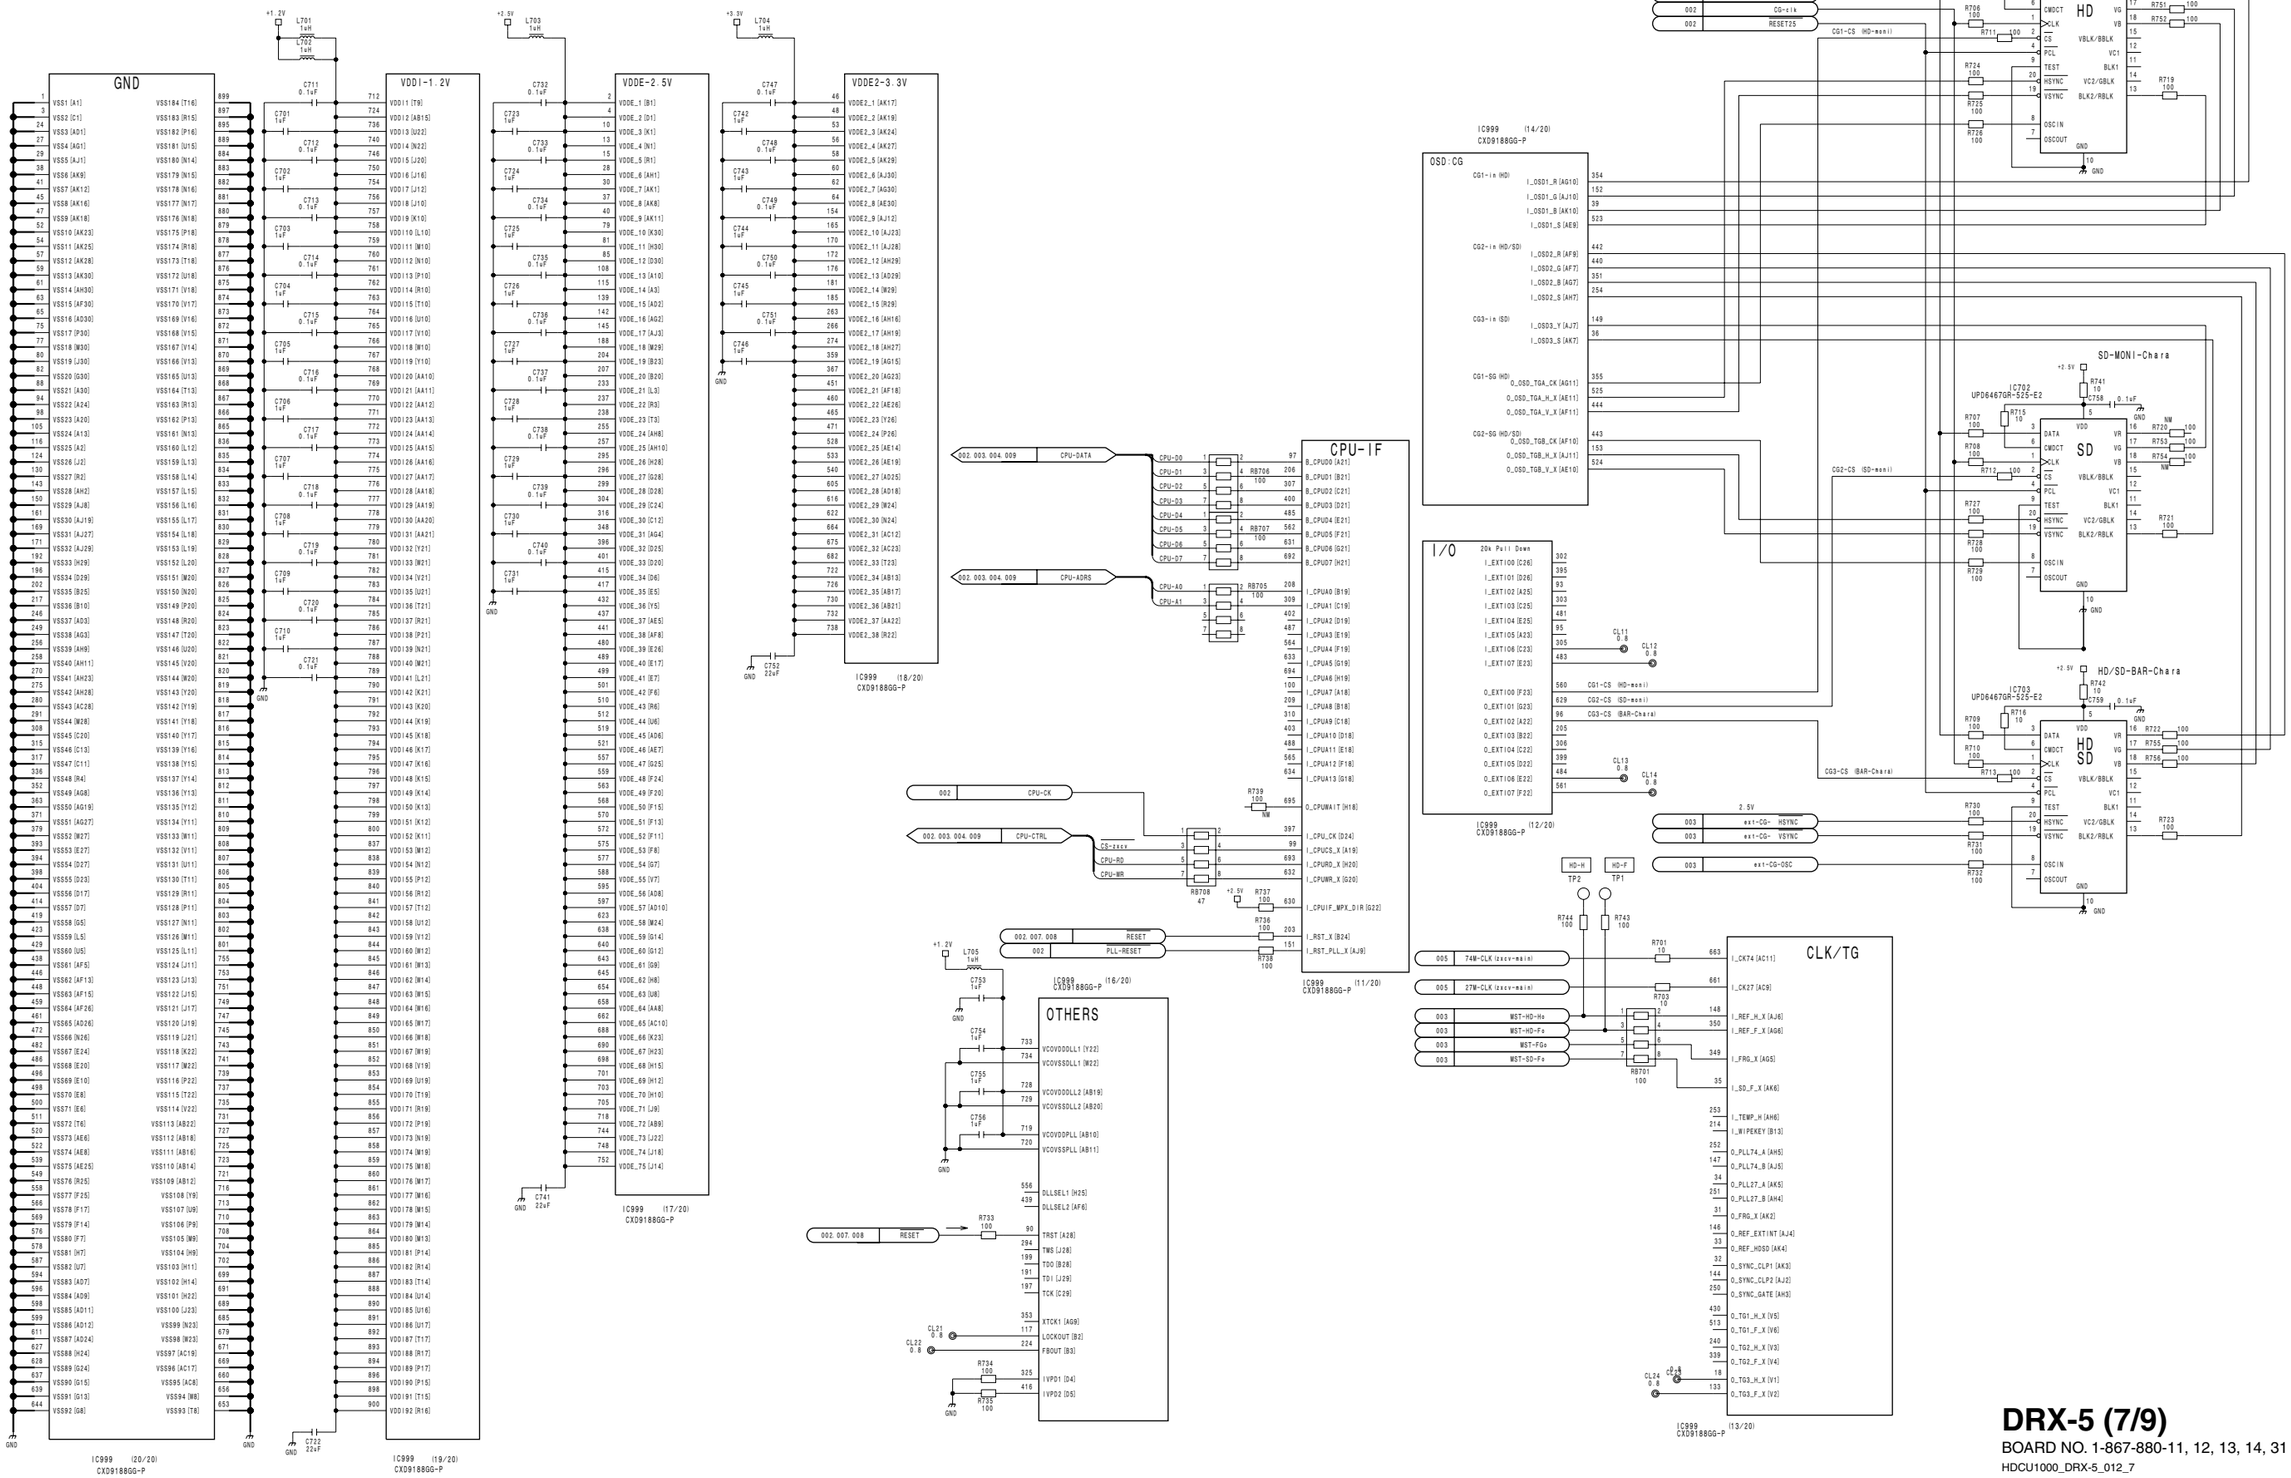

DRX-5 (7/9)
BOARD NO. 1-867-880-11, 12, 13, 14, 31
HDCU1000_DRX-5_012_7

DRX-5 (8/9)
SUFFIX: -11, -12, -13, -31

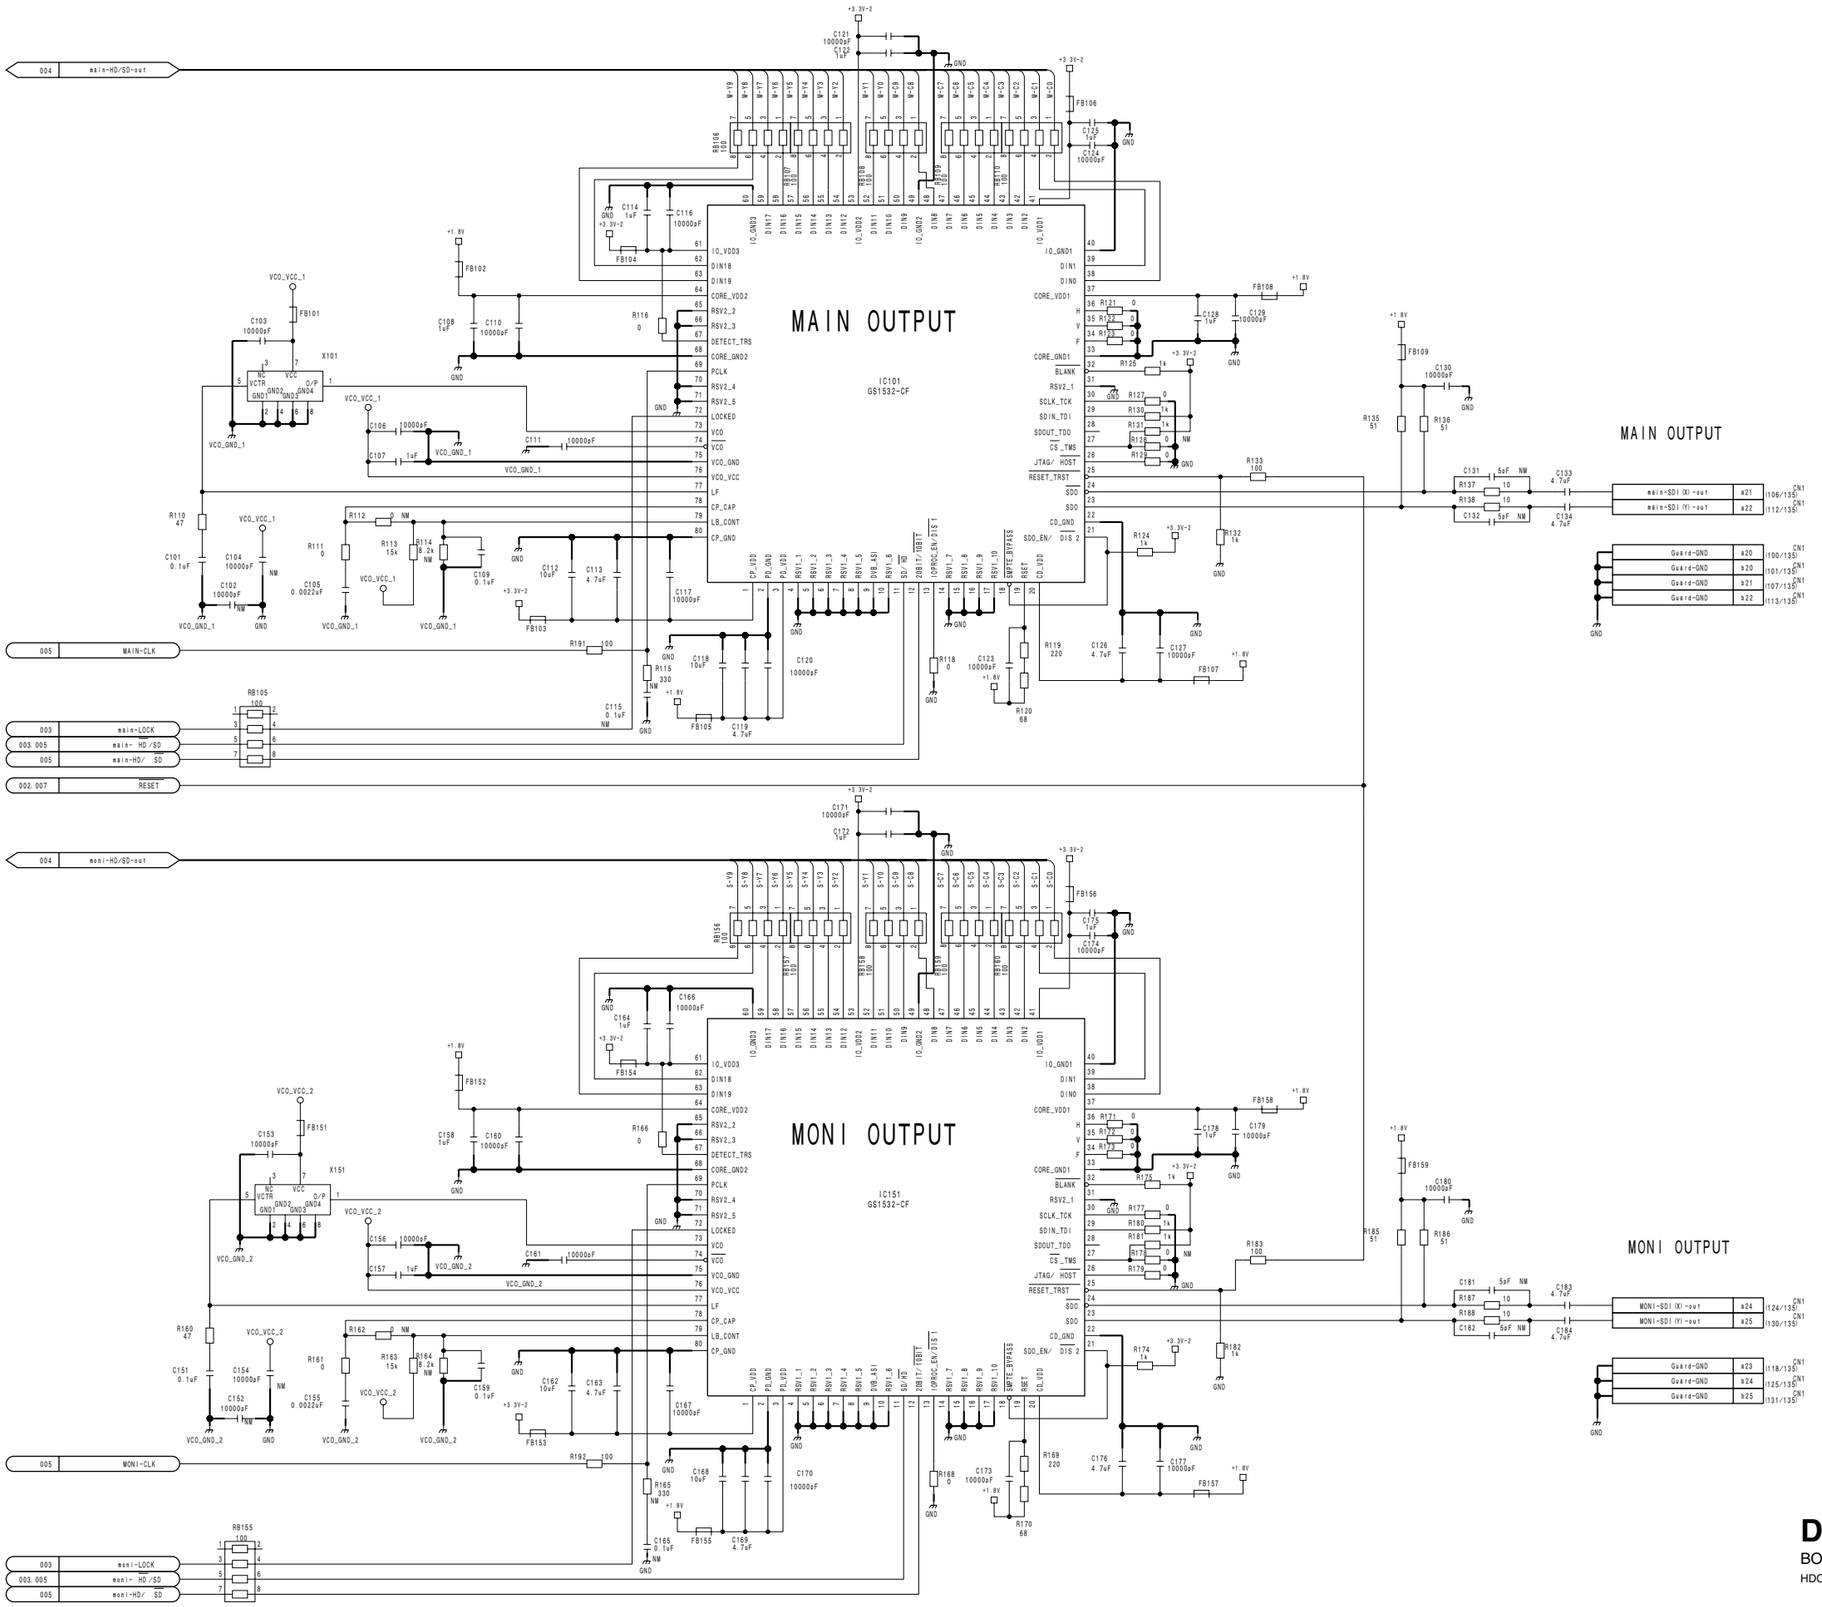

7-46

DRX-5 (8/9)
BOARD NO. 1-867-880-11, 12, 13, 31
HDCU1000_DRX-5_012_8

DRX-5 (8/9)
SUFFIX: -14

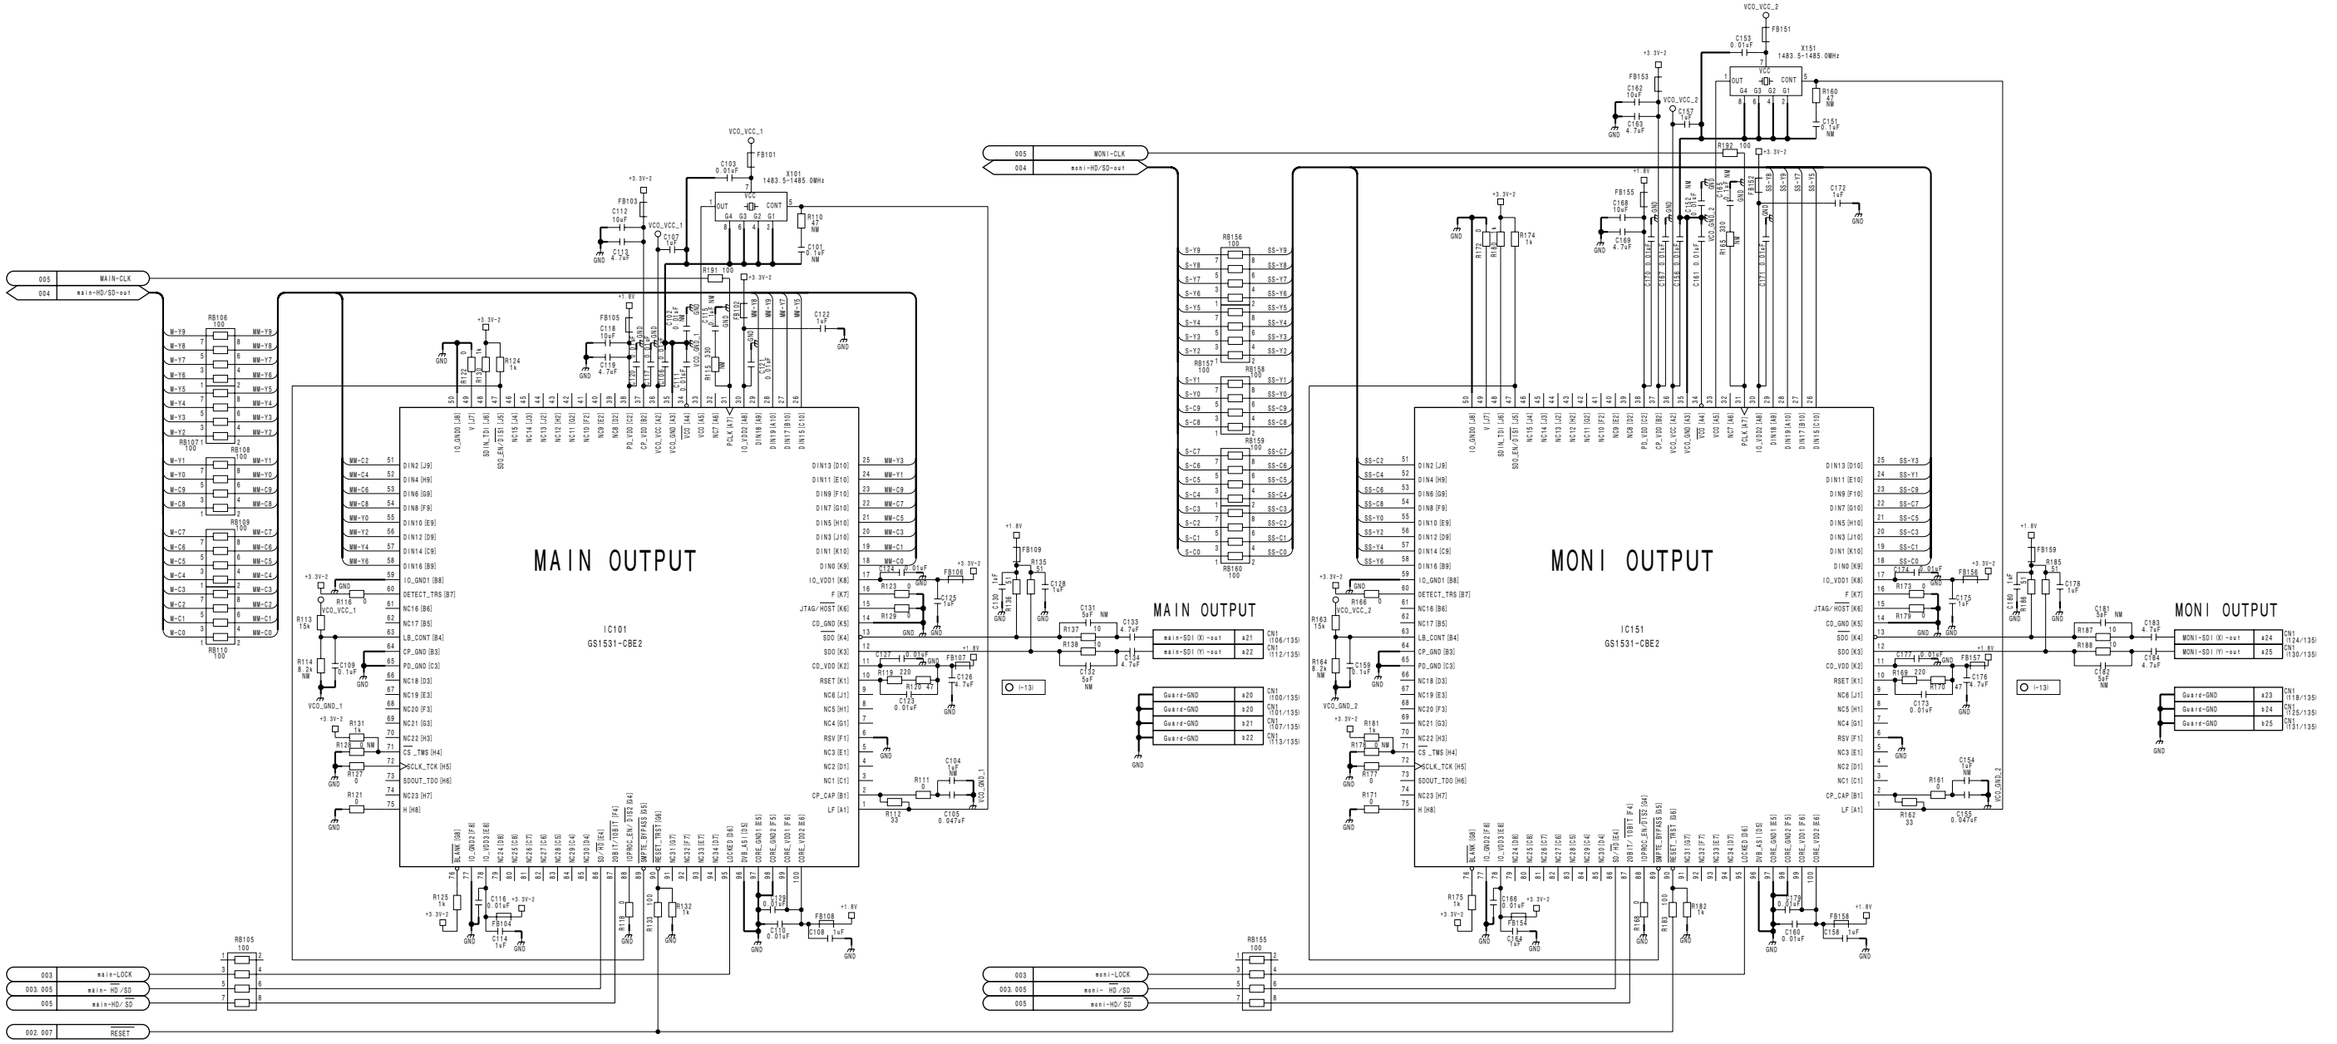

7-46 (a)

DRX-5 (8/9)
BOARD NO. 1-867-880-14
HDCU1000_DRX-5_015_8

MM/HDCU1000 Series

DRX-5 (9/9)

SUFFIX: -11, -12, -13, -14, -31

DRX-5 (9/9)

SUFFIX: -11, -12, -13, -14, -31

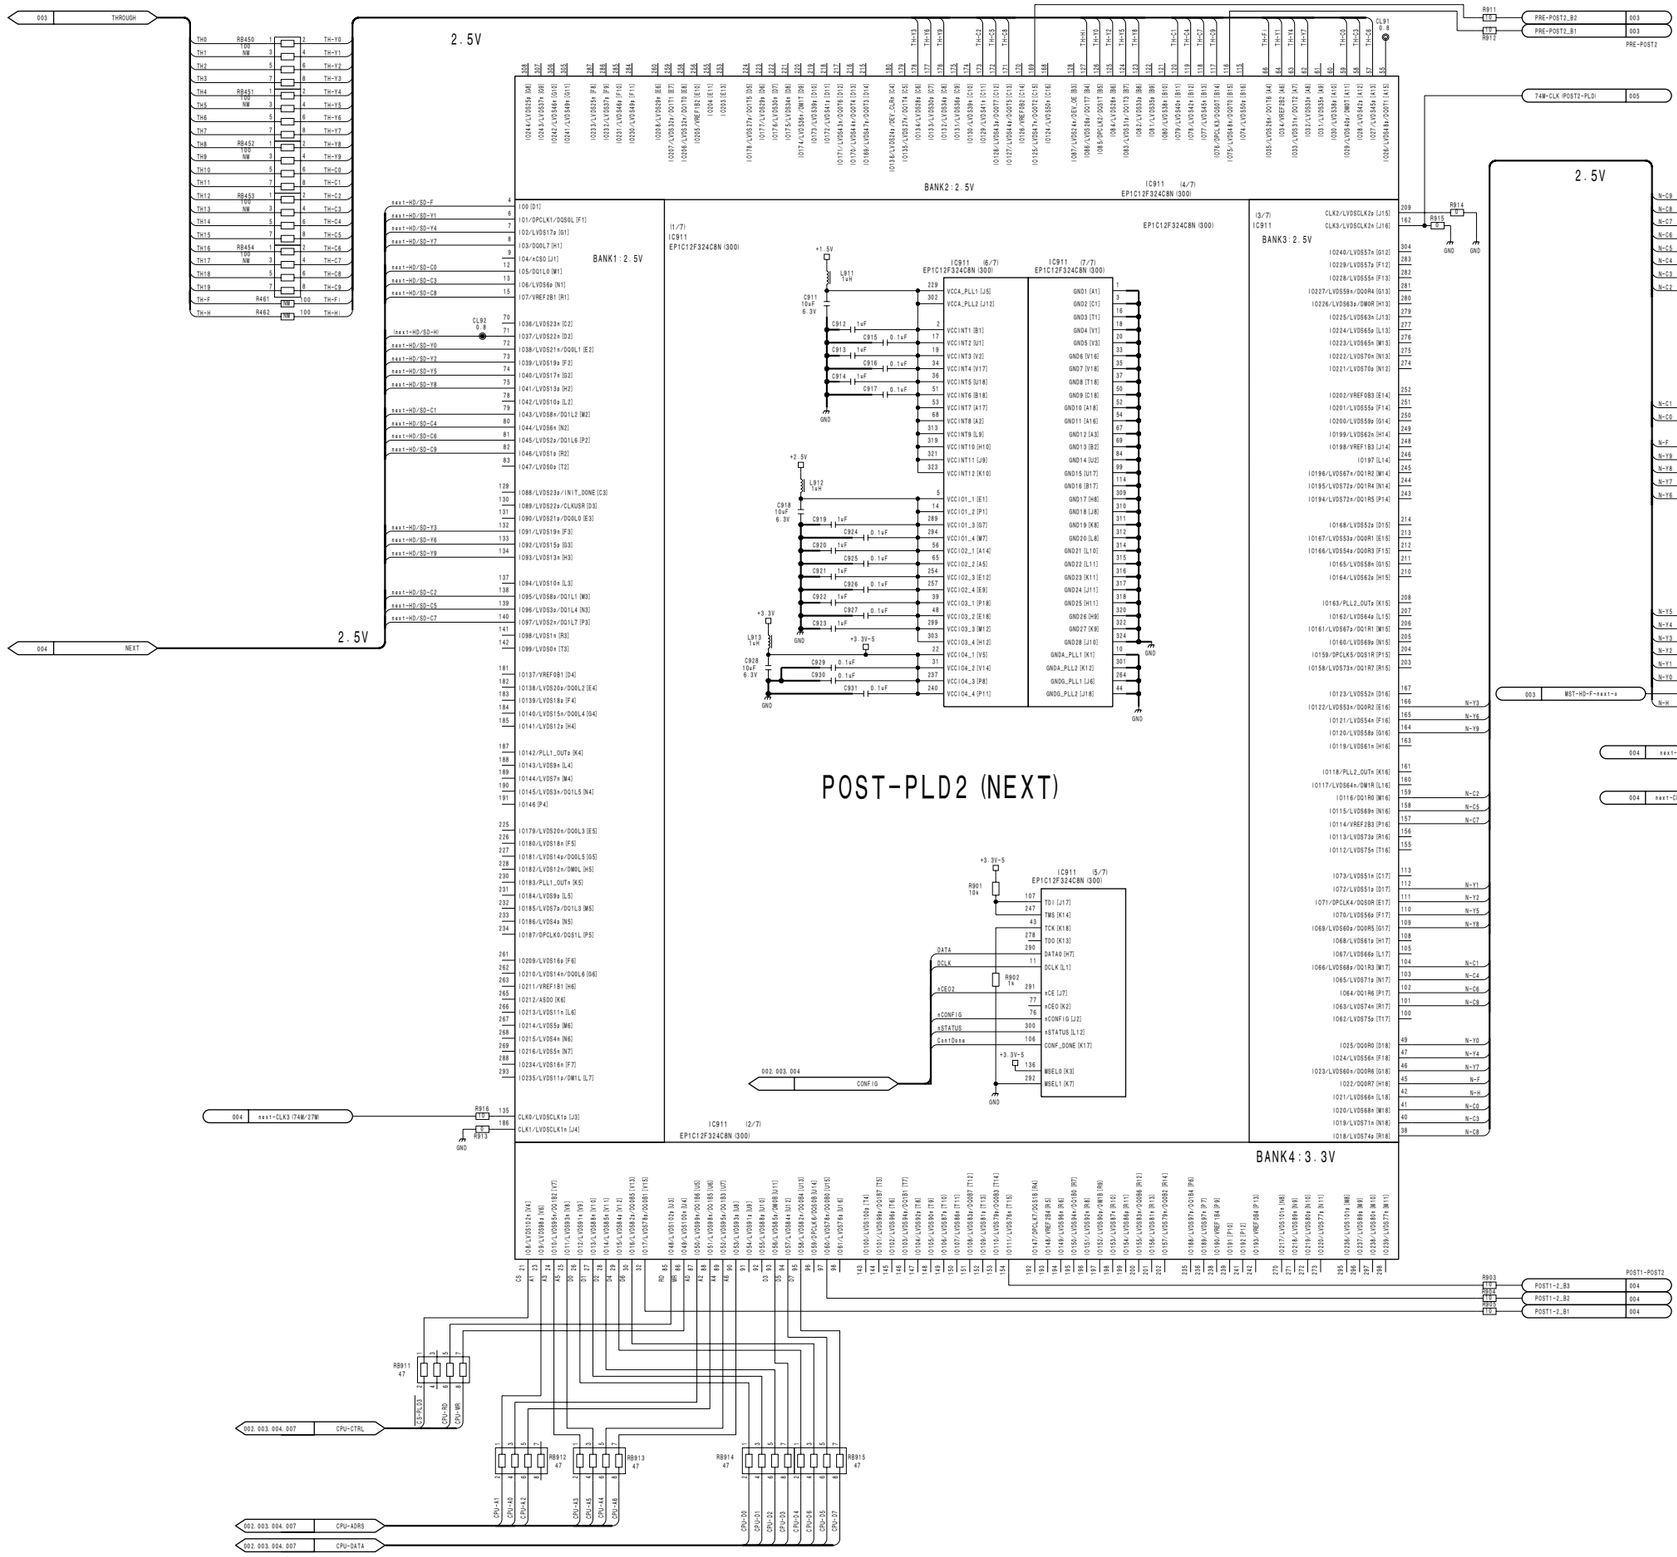

DRX-5 (9/9)

BOARD NO. 1-867-880-11, 12, 13, 14, 31

HDCU1000_DRX-5_012_9

DTX-5 (1/7)
SUFFIX: -11, -12, -31, -32

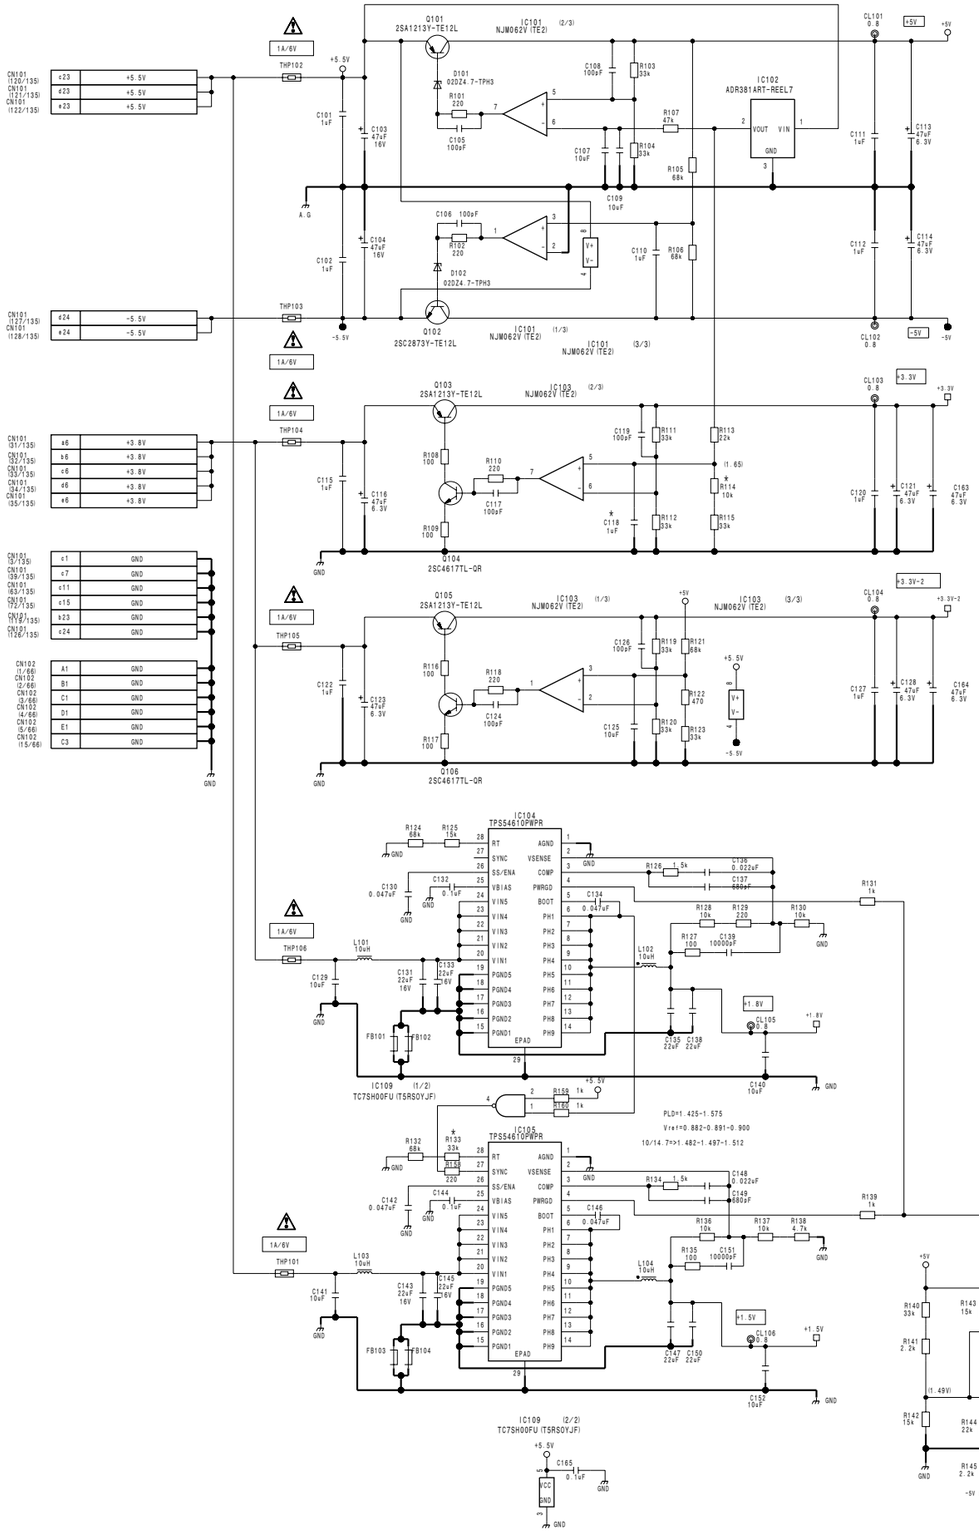

MARK	CHANGED INFORMATION	BOARD SUFFIX
*	C118 4.7uF → 1uF R114 6.8k → 10k R133 15k → 33k	12 -, 32 -

DTX-5 (1/7)
BOARD NO. 1-867-879-11, 12, 31, 32
HDCU1000_DTX-5_011_1

DTX-5 (2/7)
SUFFIX: -11, -31

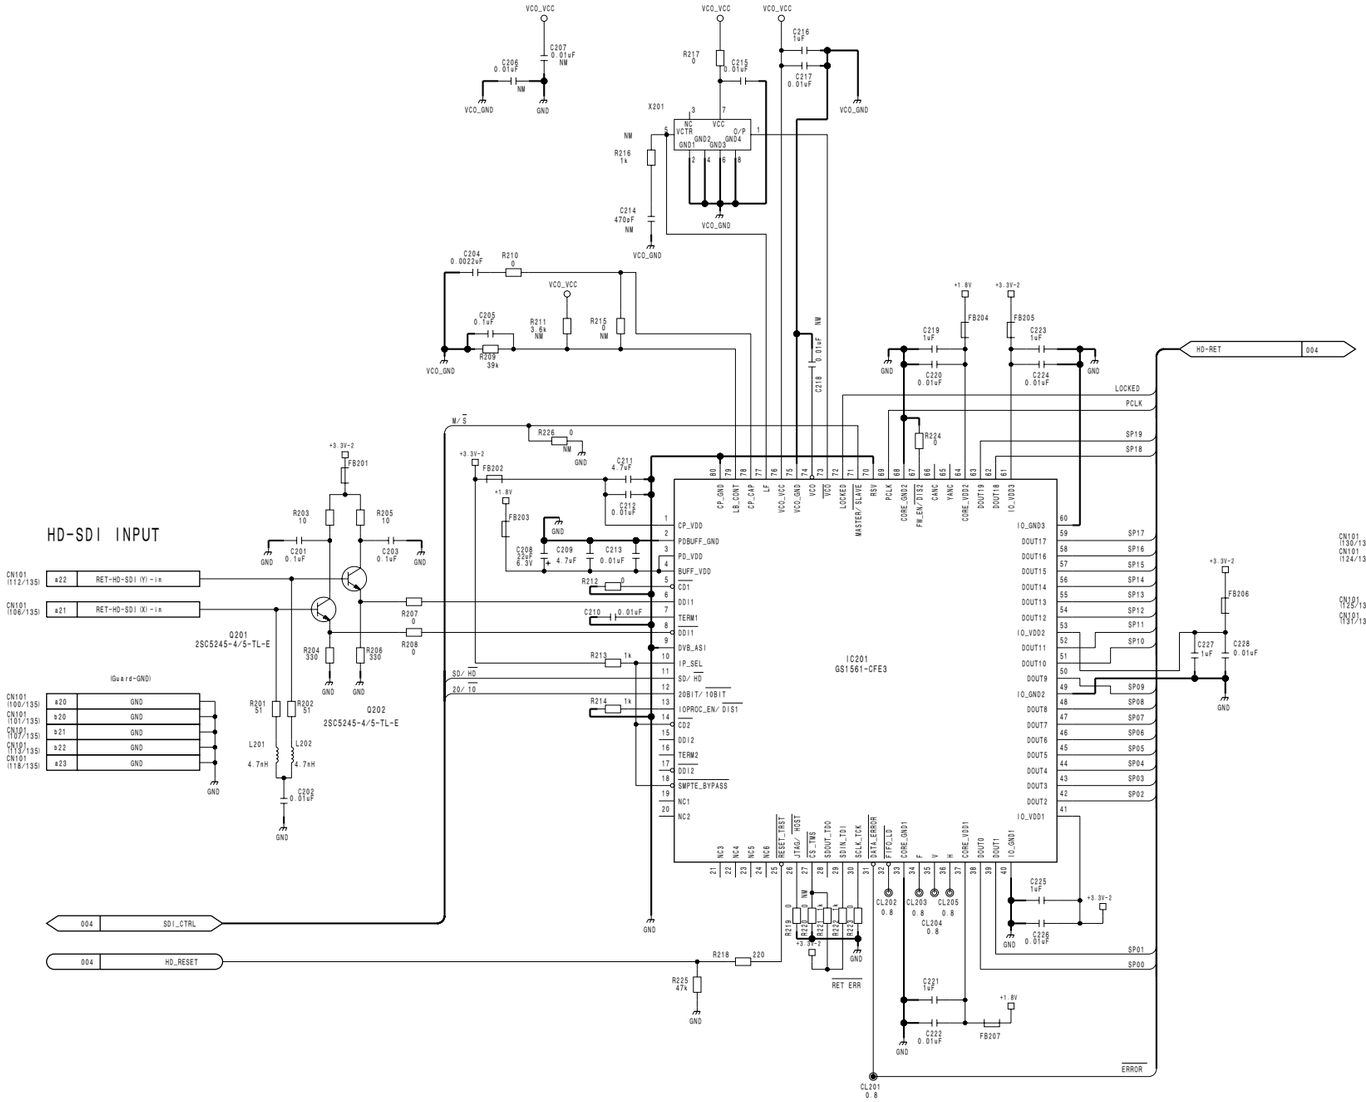

DTX-5 (2/7)
BOARD NO. 1-867-879-11, 31
HDCU1000_DTX-5_011_2

DTX-5 (2/7)
SUFFIX: -12, -32

DTX-5 (2/7)
SUFFIX: -12, -32

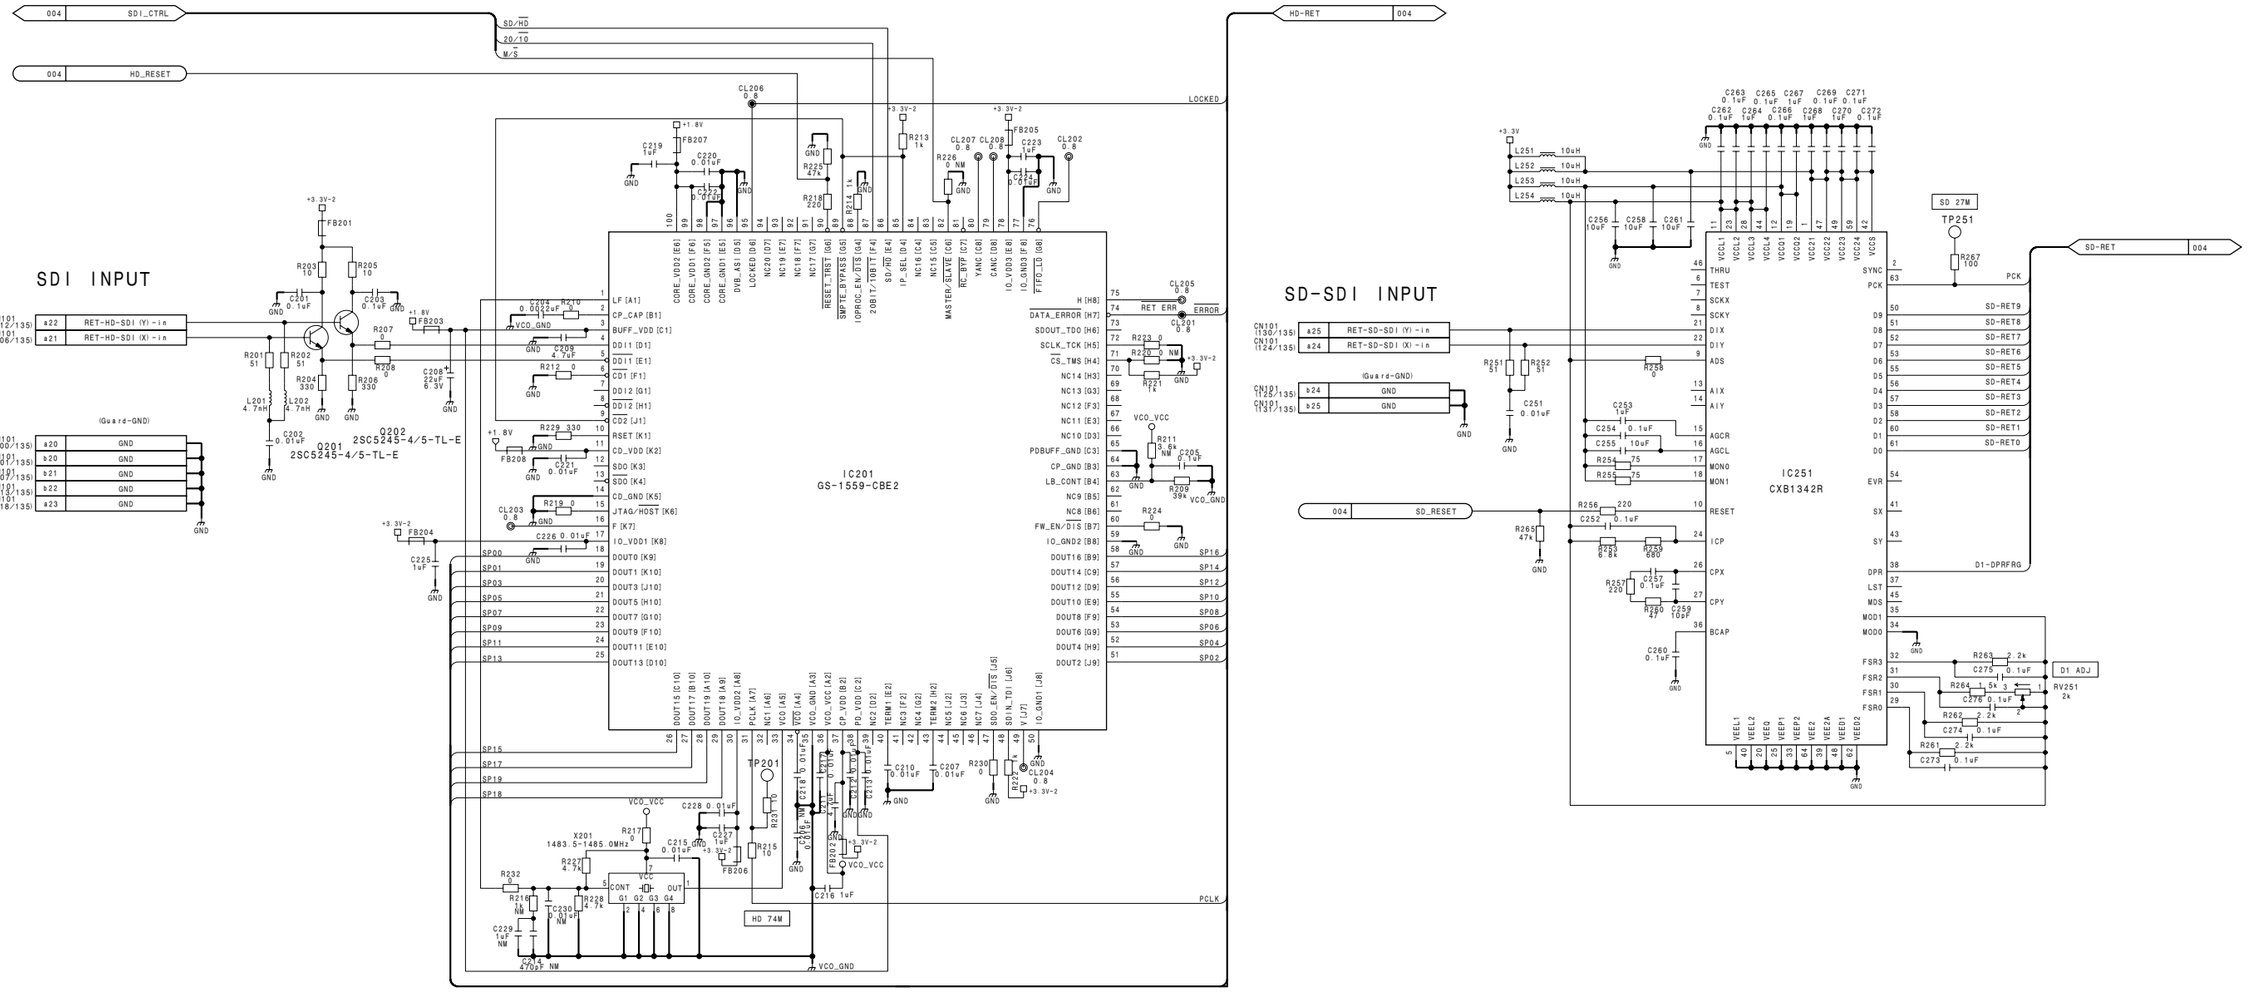

1
2
3
4
5

DTX-5 (2/7)
BOARD NO. 1-867-879-12, 32
HDCU1000_DTX-5_012_2

DTX-5 (3/7)
SUFFIX: -11, -12, -31, -32

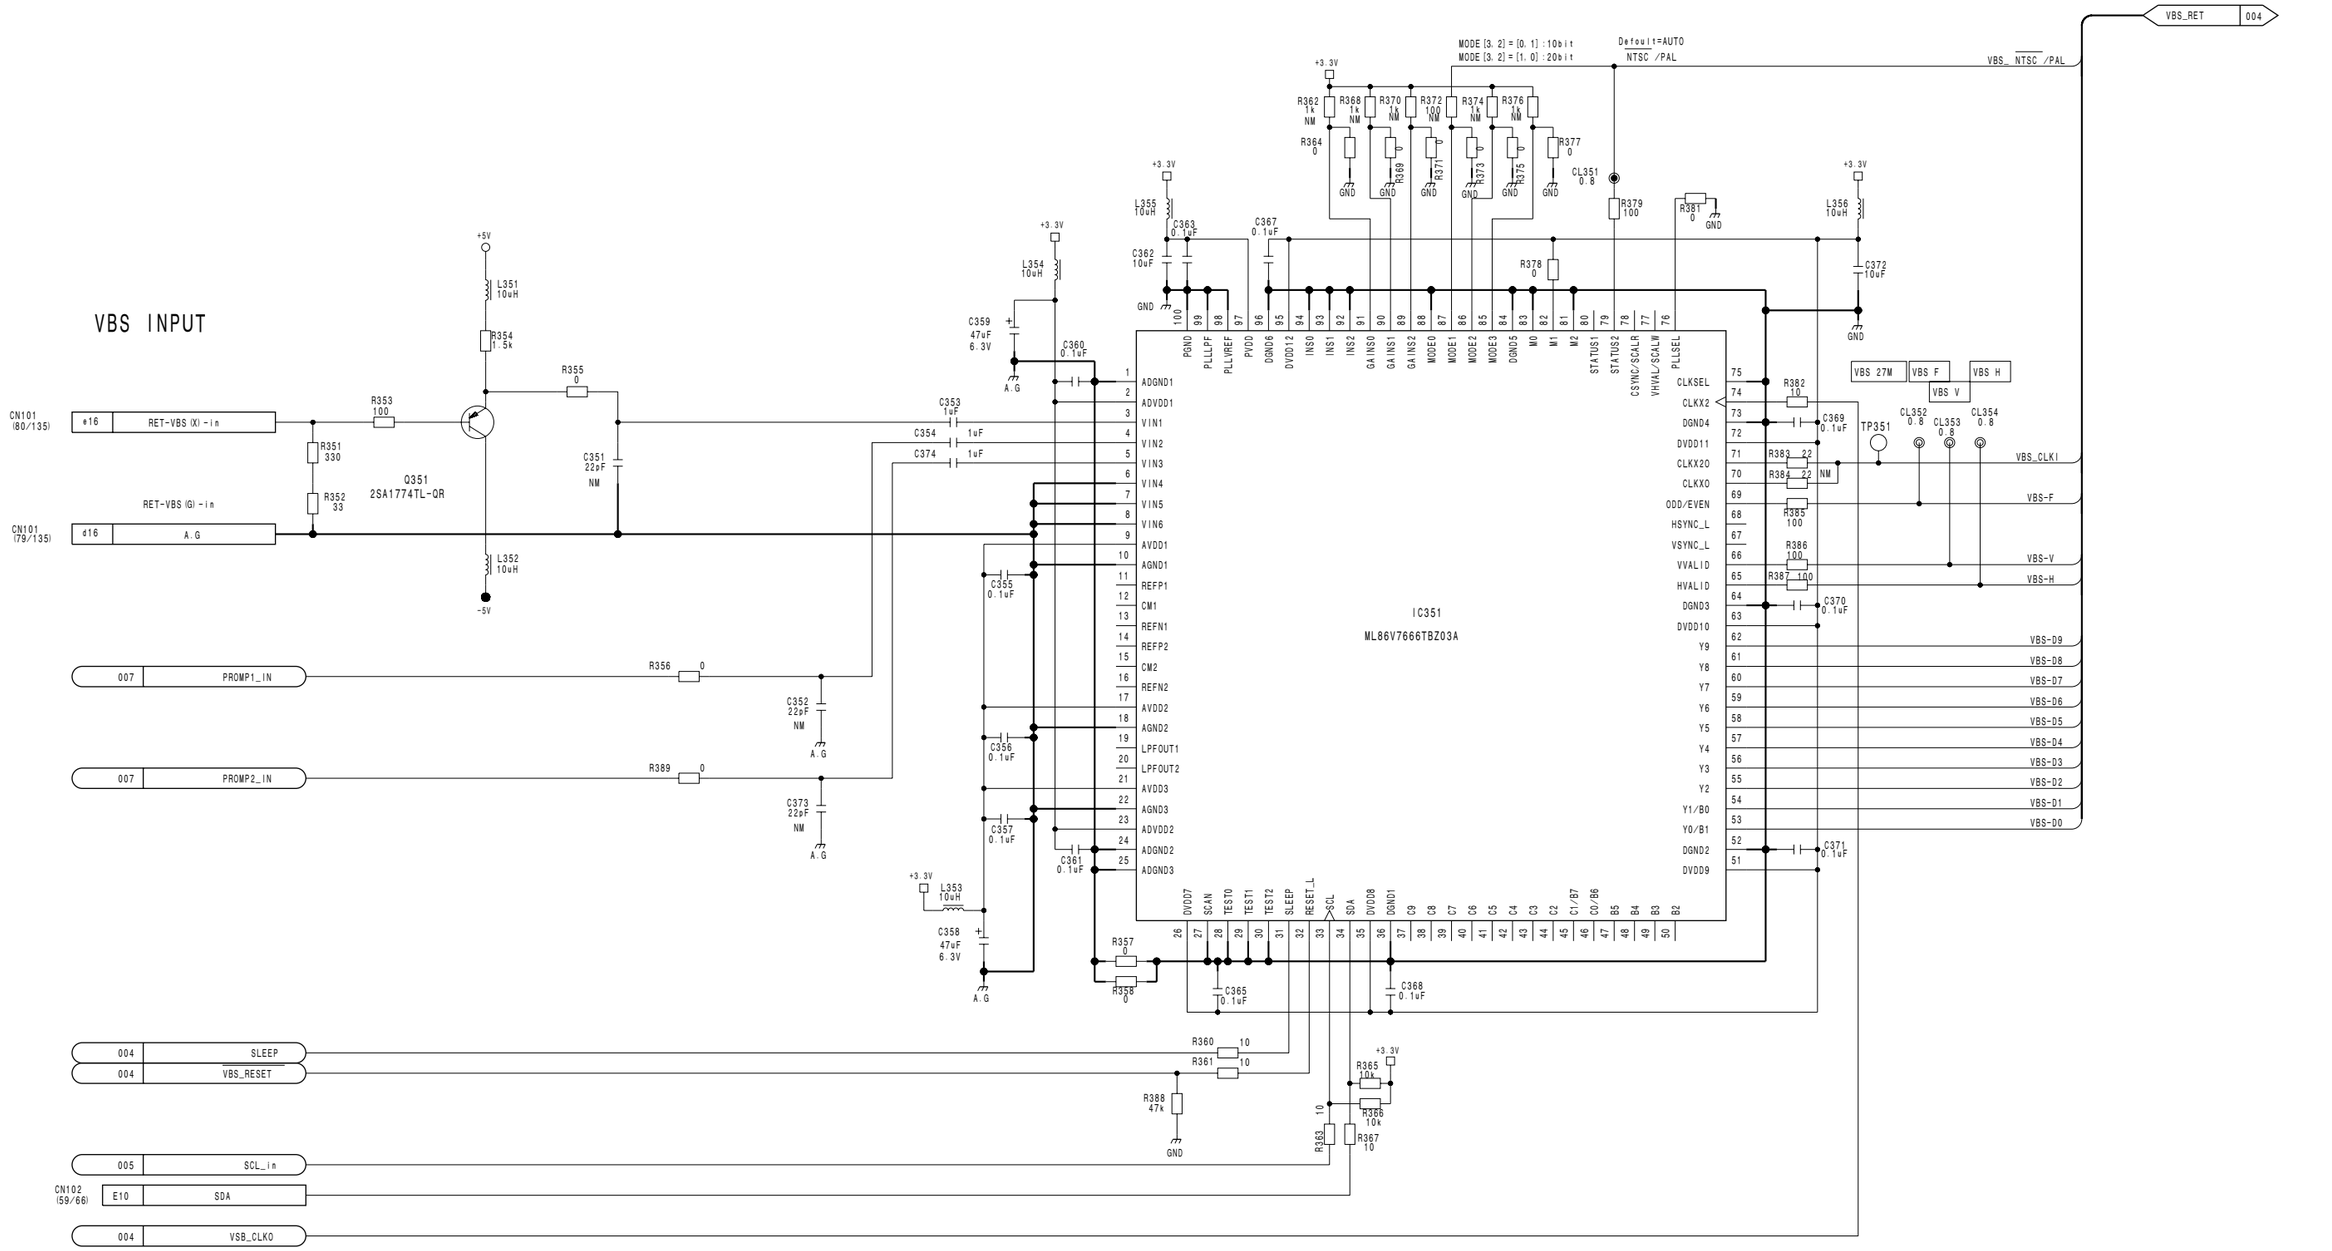

DTX-5 (4/7)

SUFFIX: -11, -12, -31, -32

DTX-5 (4/7)

SUFFIX: -11, -12, -31, -32

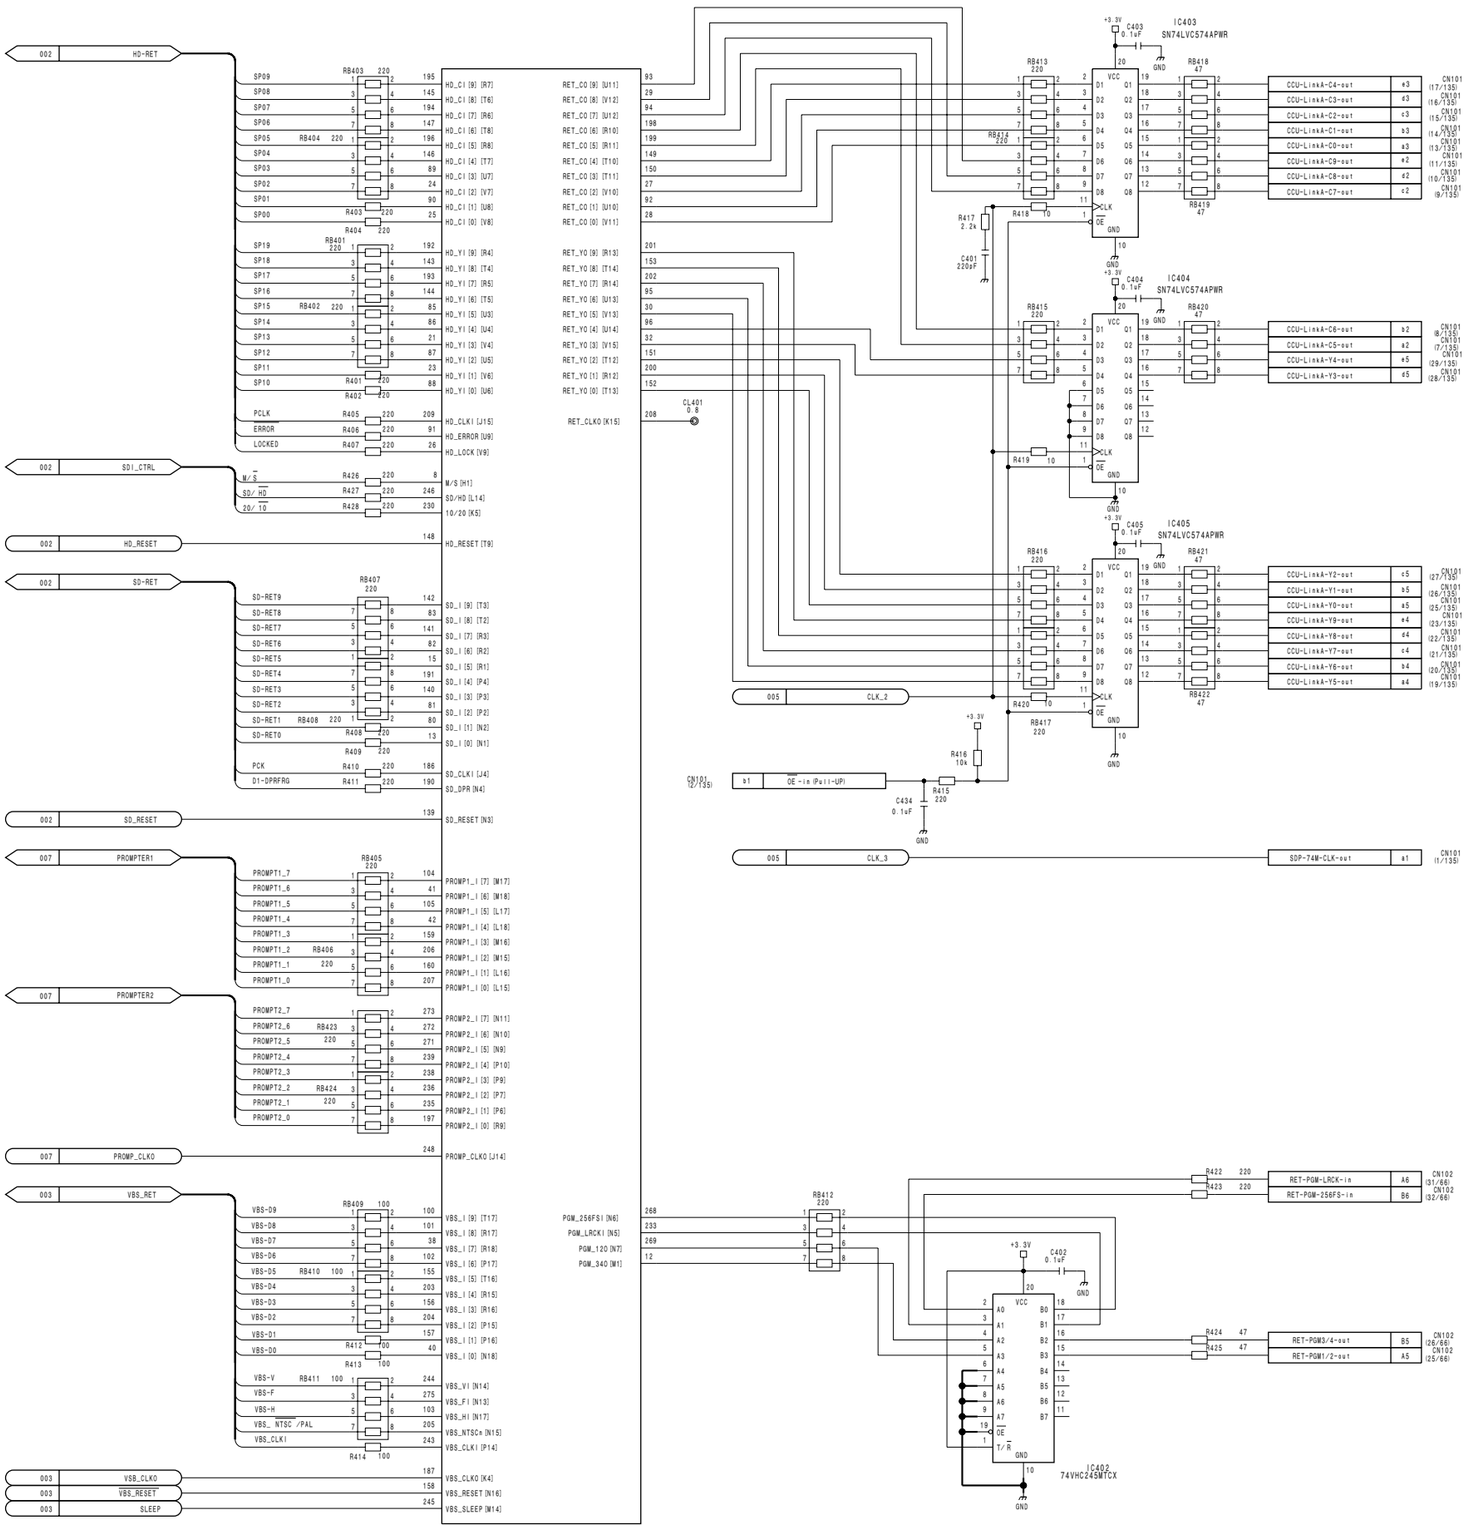

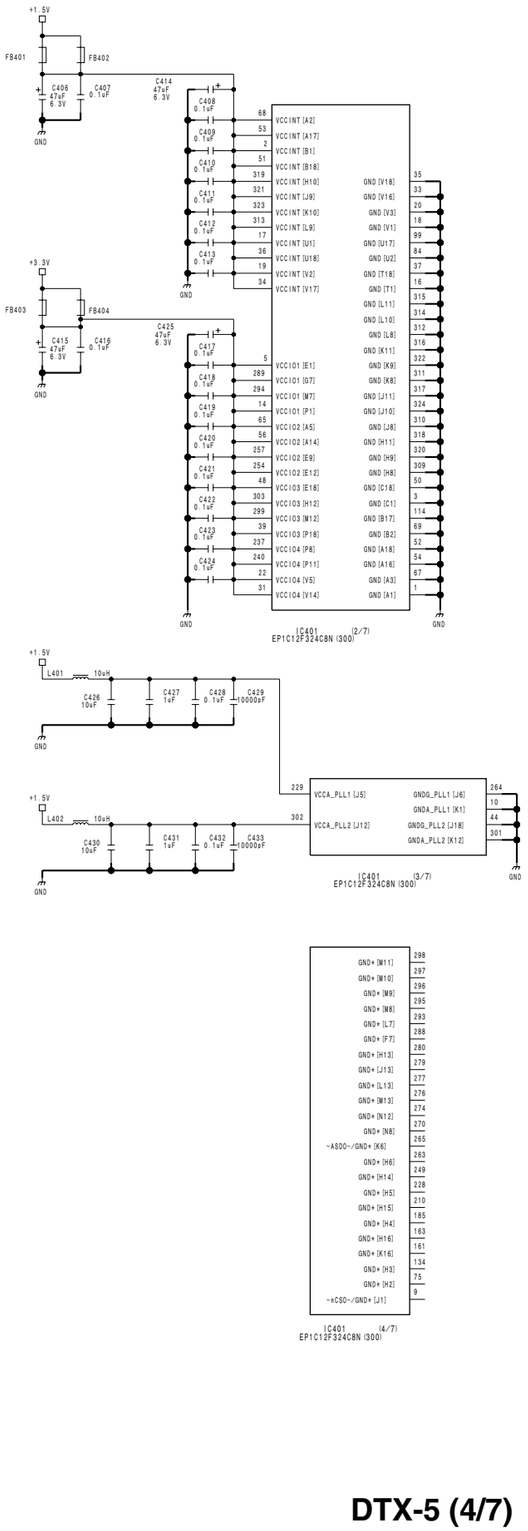

DTX-5 (4/7)

BOARD NO. 1-867-879-11, 12, 31, 32

HDCU1000_DTX-5_011_4

DTX-5 (5/7)

SUFFIX: -11, -12, -31, -32

DTX-5 (5/7)

SUFFIX: -11, -12, -31, -32

MARK	CHANGED INFORMATION	BOARD SUFFIX
*	IC509, IC510 IS42S32200B-6TL-TR → IS42S32200C1-6TL-TR	12 -, 32 -

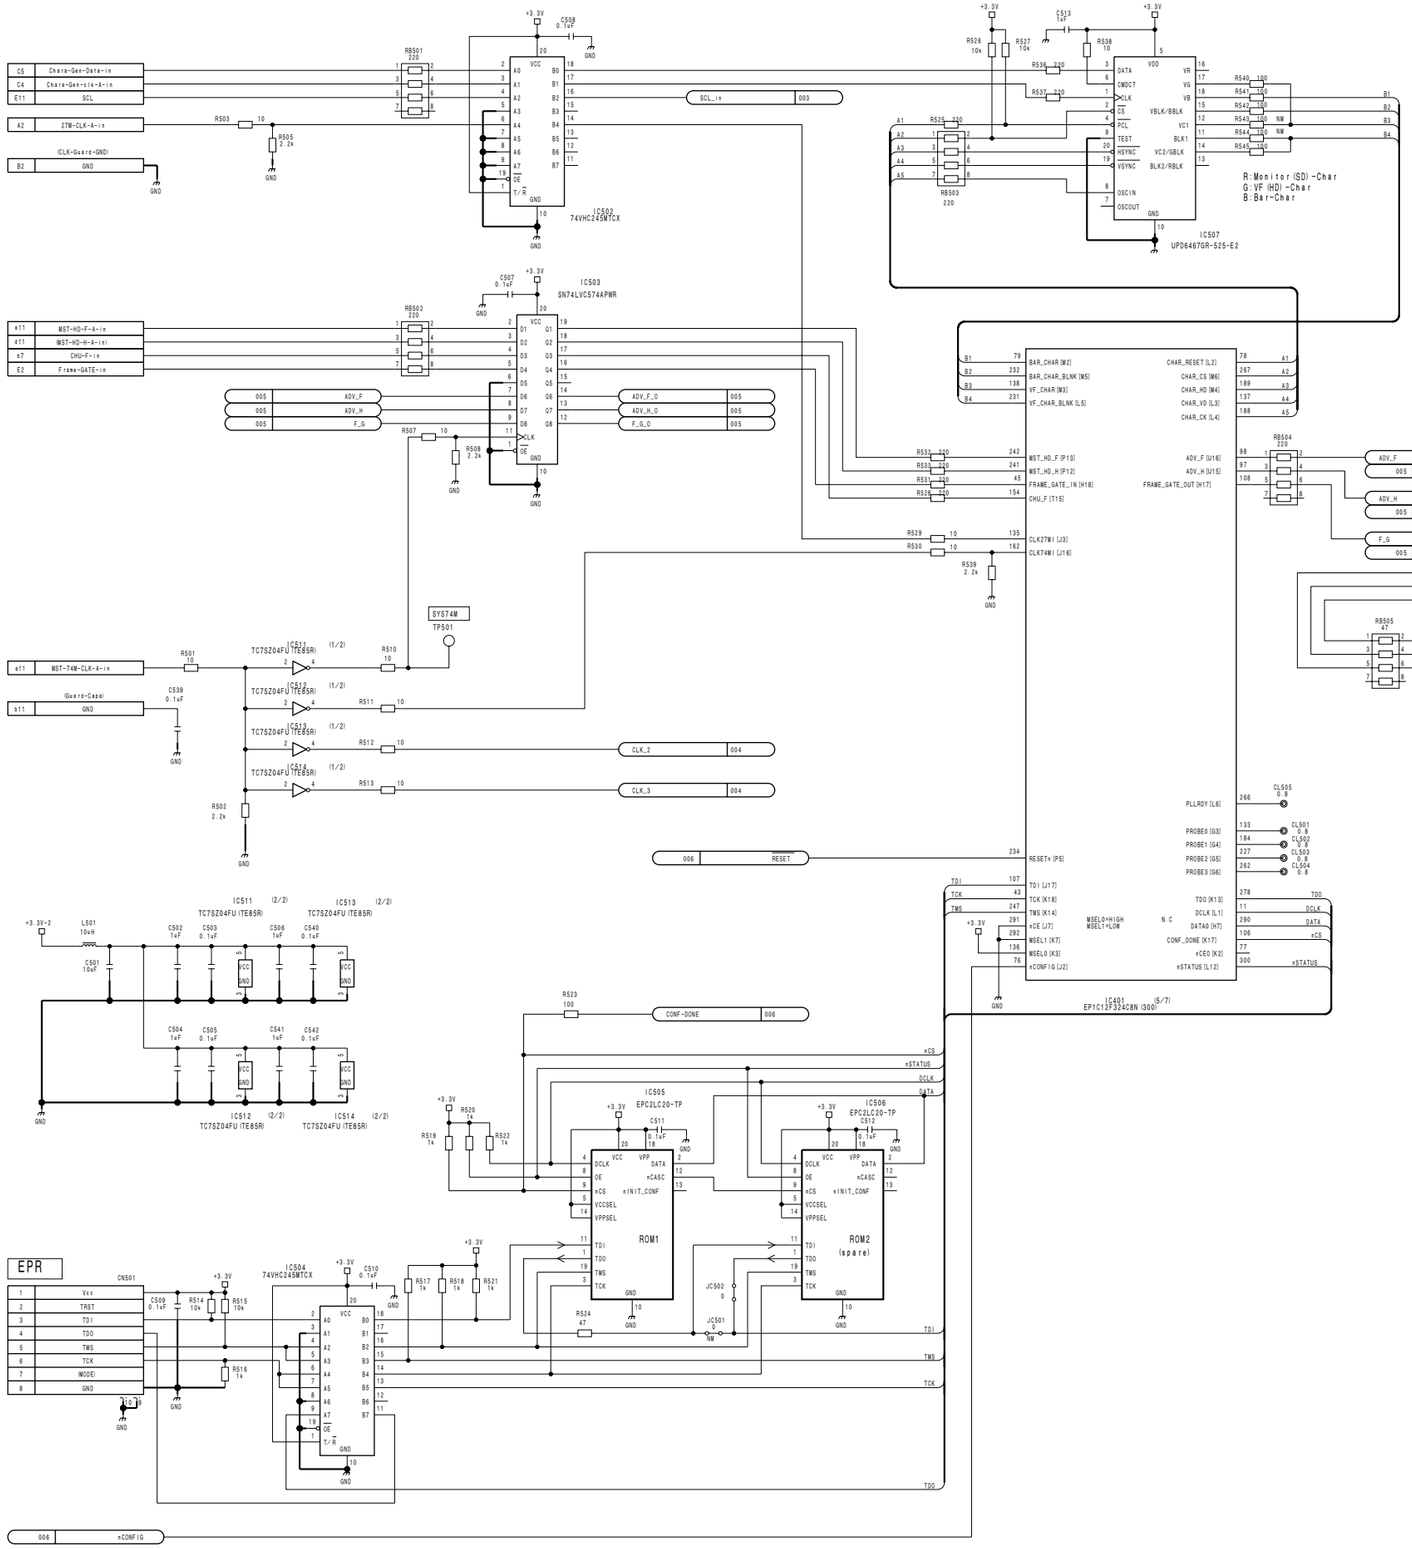

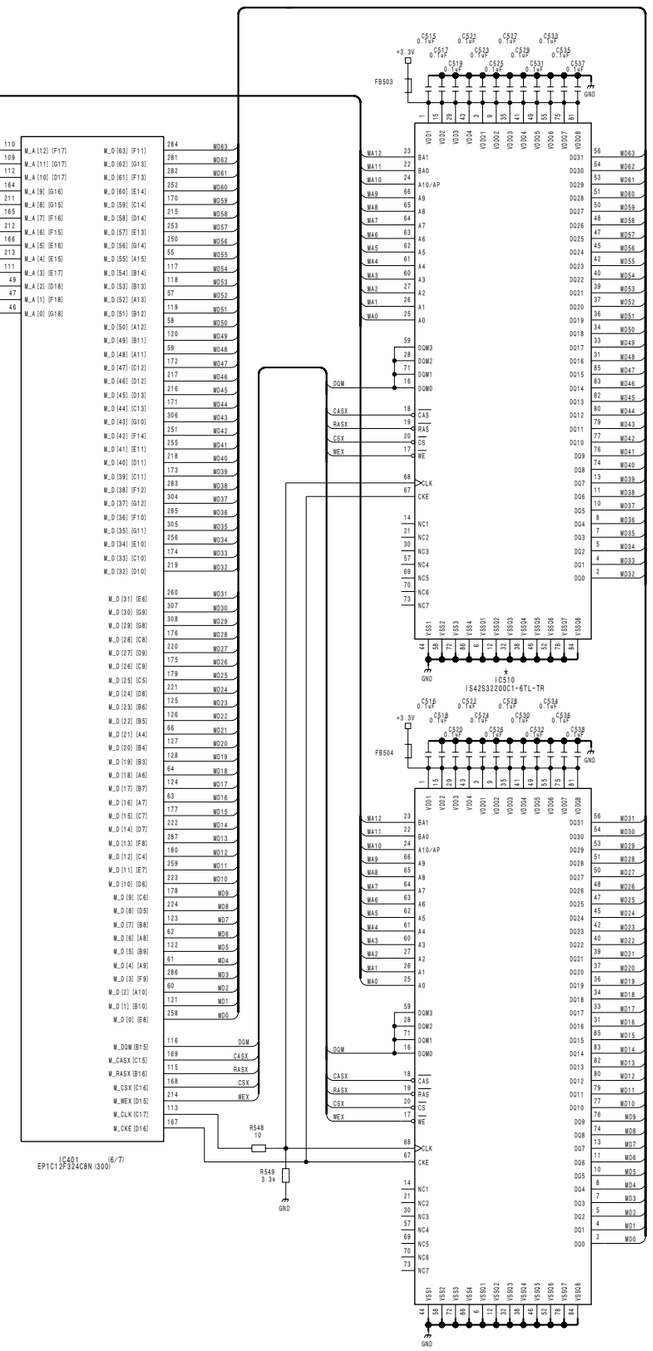

7-52

DTX-5 (5/7)

BOARD NO. 1-867-879-11, 12, 31, 32

HDCU1000_DTX-5_011_5

DTX-5 (6/7)
SUFFIX: -11, -12, -31, -32

MARK	CHANGED INFORMATION	BOARD SUFFIX
*	D602, D605 CL-191Y-CD-T → CL-196TLY-CD-T R616, R632 2.2k → 4.7k	12 -, 32 -

DTX-5 (6/7)
BOARD NO. 1-867-879-11, 12, 31, 32
HDCU1000_DTX-5_011_6

DTX-5 (7/7)
SUFFIX: -11, -12, -31, -32

PROMPTER1 INPUT

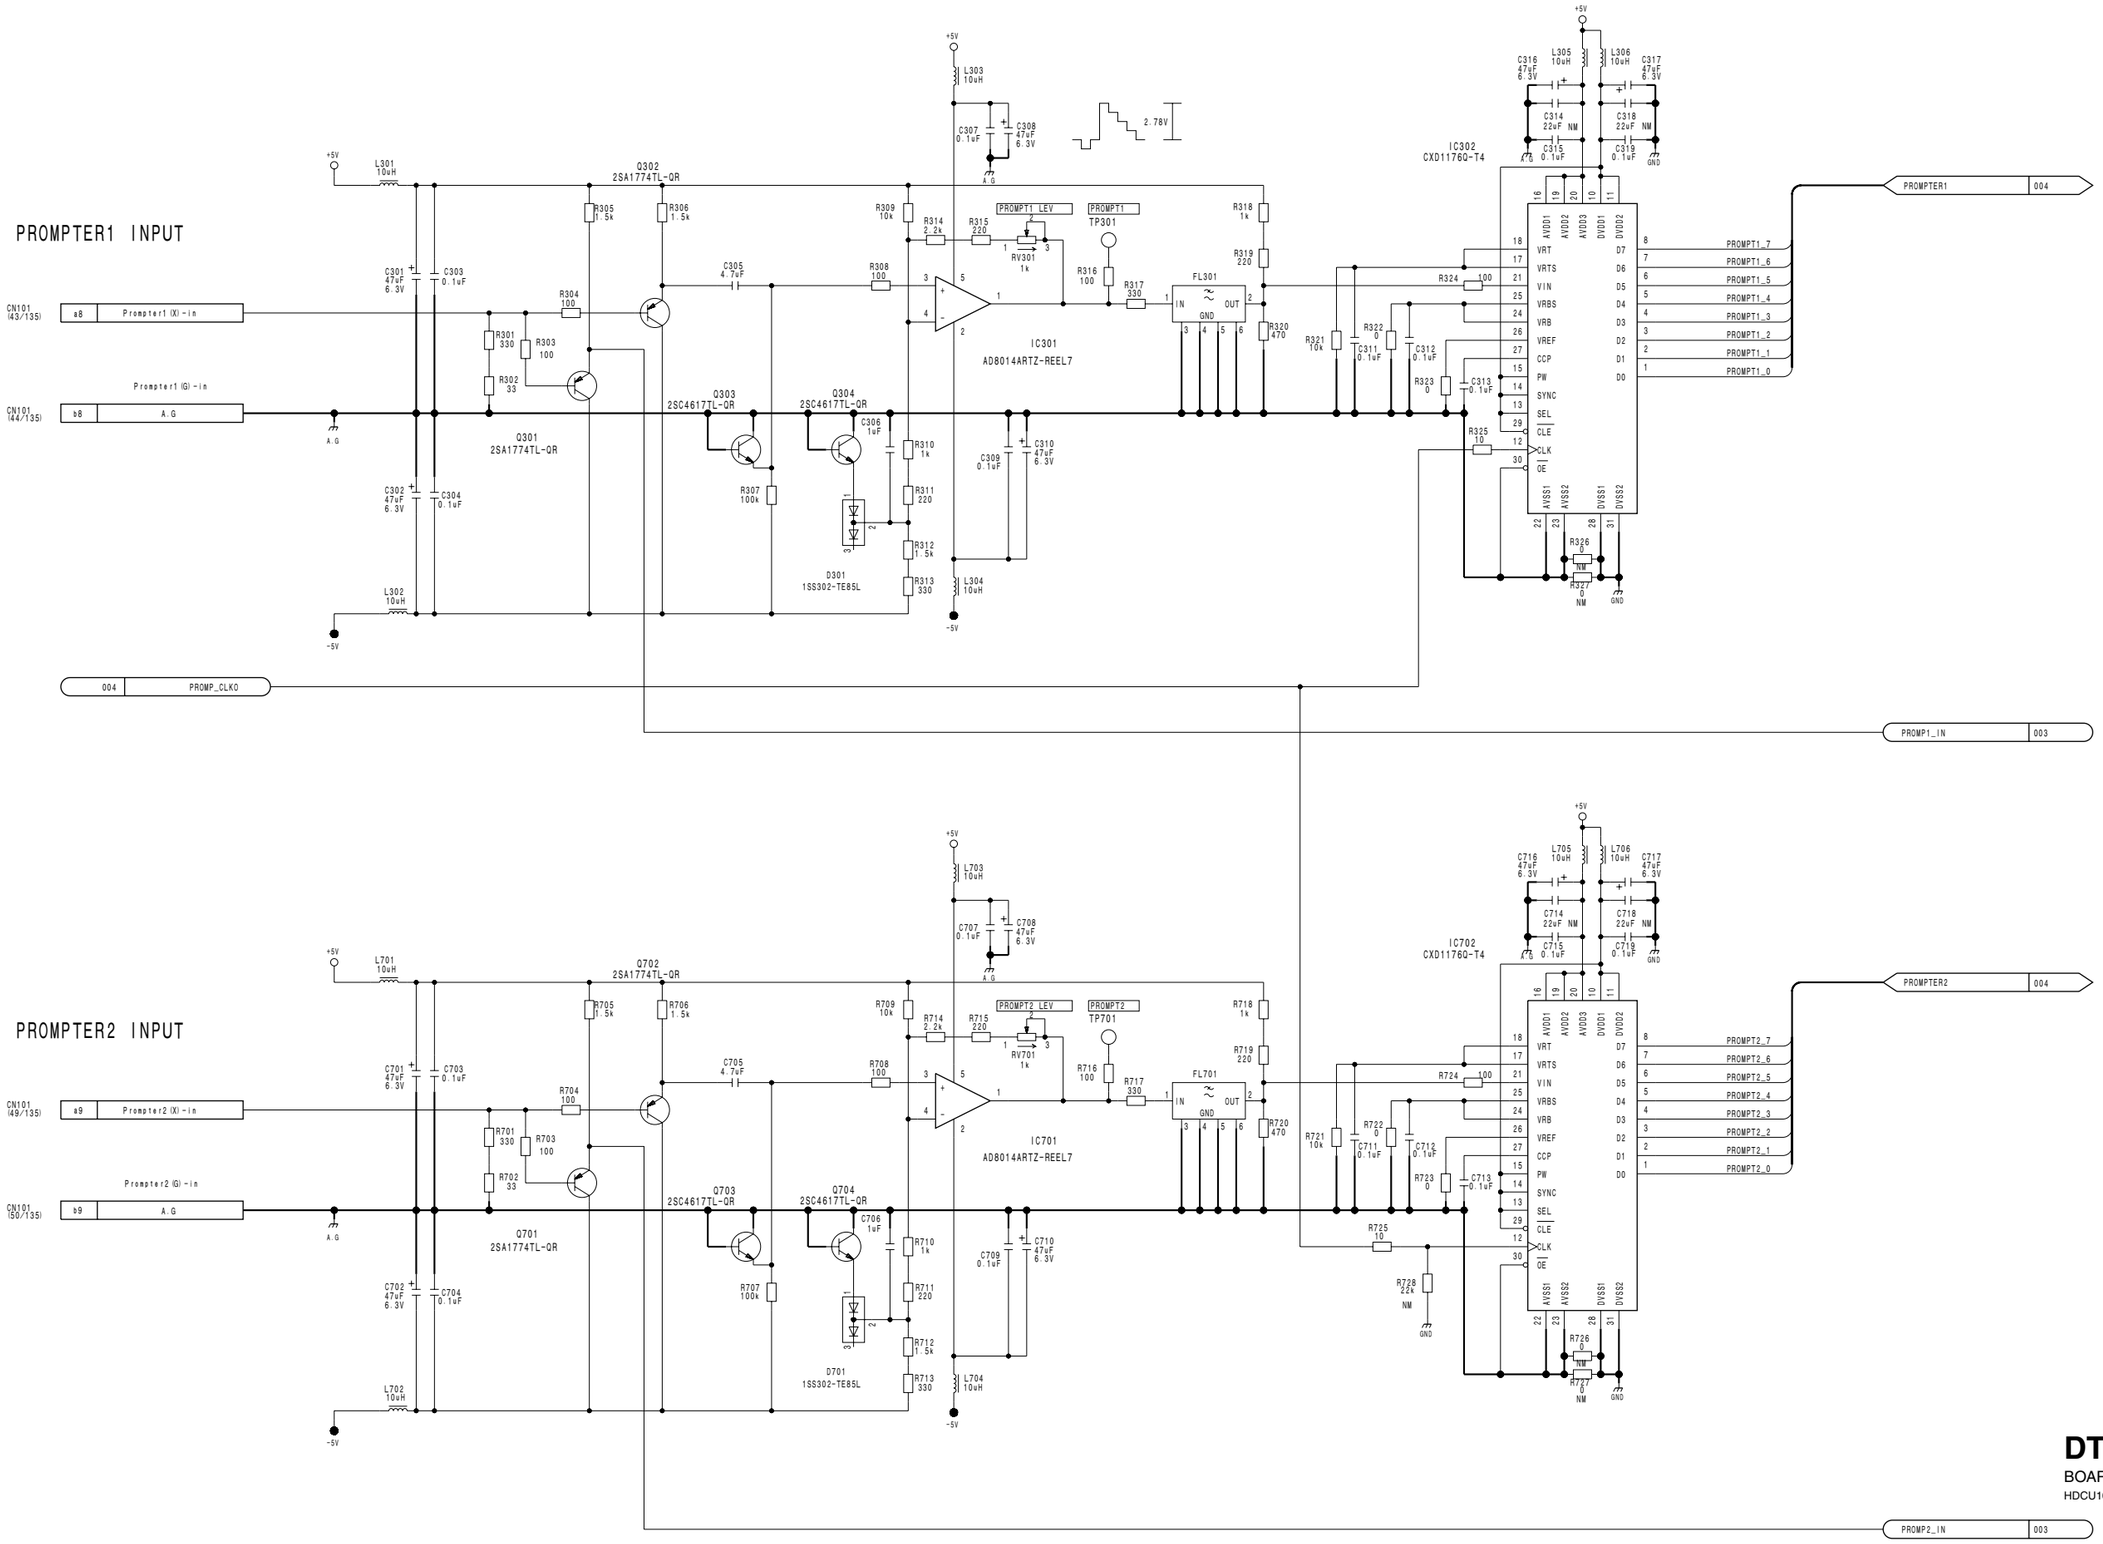

PROMPTER2 INPUT

DTX-5 (7/7)
BOARD NO. 1-867-879-11, 12, 31, 32
HDCU1000_DTX-5_011_7

DU-390
BOARD NO. 1-870-346-11
HDCU1000_DU-390_001_1

DU-565
SUFFIX: -11

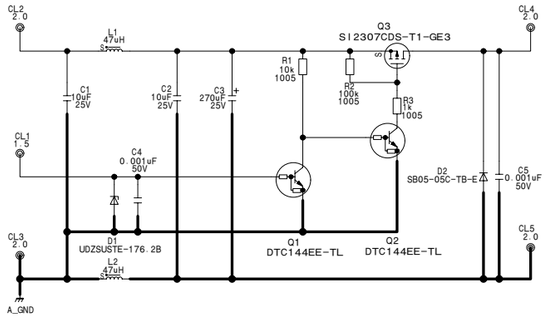

DU-565

BOARD NO. 1-883-177-11

CAX-183-D00_DU-565_11S_1

7-56

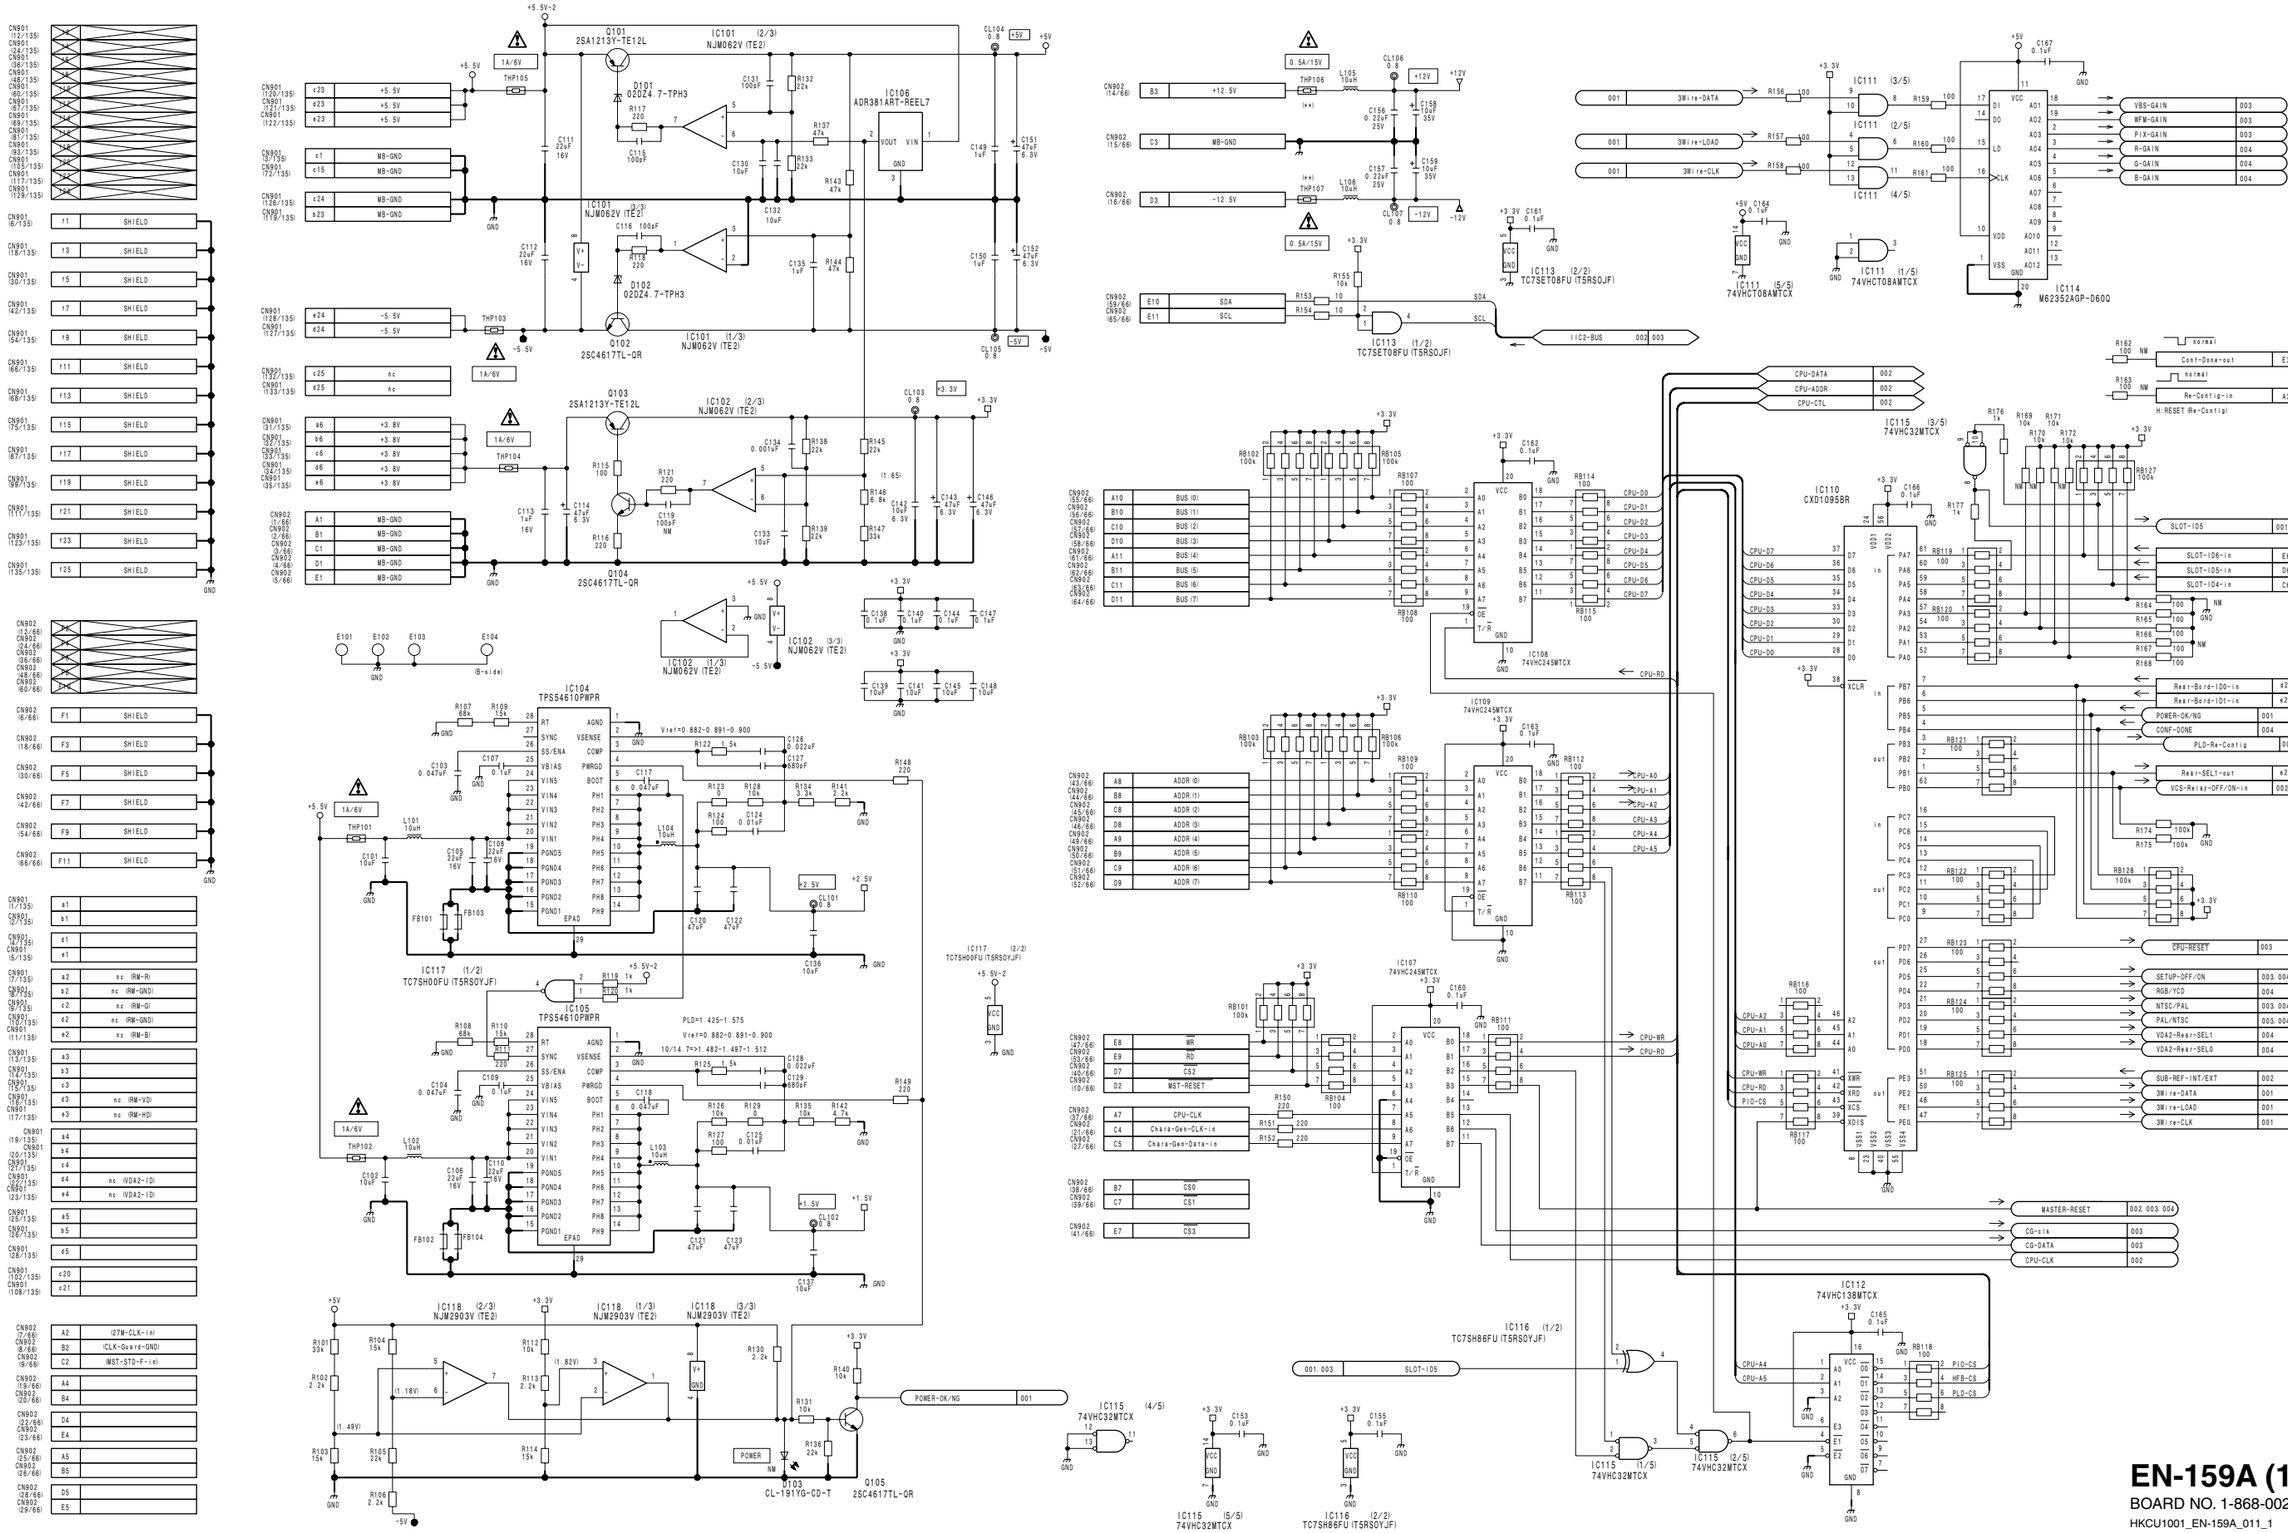
Q101 2SA1213Y-TE12L
Q102 2SC4617TL-QR
Q103 2SA1213Y-TE12L
Q104 2SC4617TL-QR
IC101 (2/3) NJM062V (TE2)
IC101 (3/3) NJM062V (TE2)
IC101 (1/3) NJM062V (TE2)
IC102 (2/3) NJM062V (TE2)
IC102 (1/3) NJM062V (TE2)
IC102 (3/3) NJM062V (TE2)
IC106 ADR381ART-REEL7
IC104 TPS54610PWPR
IC105 TPS54610PWPR
IC117 (1/2) TC7SH00FU (T5RSOYJF)
IC117 (2/2) TC7SH00FU (T5RSOYJF)
IC118 (2/3) NJM2903V (TE2)
IC118 (1/3) NJM2903V (TE2)
IC118 (3/3) NJM2903V (TE2)
IC113 (2/2) TC7SET08FU (T5RSOJF)
IC113 (1/2) TC7SET08FU (T5RSOJF)
IC111 (3/5) 74VHC32MTCX
IC111 (2/5) 74VHC32MTCX
IC111 (4/5) 74VHC32MTCX
IC111 (5/5) 74VHCT08AMTCX
IC111 (1/5) 74VHCT08AMTCX
IC114 M62352AGP-D60Q
IC110 CXD1095BR
IC107 74VHC245MTCX
IC108 74VHC245MTCX
IC109 74VHC245MTCX
IC112 74VHC138MTCX
IC115 (1/5) 74VHC32MTCX
IC115 (2/5) 74VHC32MTCX
IC115 (4/5) 74VHC32MTCX
IC115 (5/5) 74VHC32MTCX
IC116 (1/2) TC7SH86FU (T5RSOYJF)
IC116 (2/2) TC7SH86FU (T5RSOYJF)
CL-191YG-CD-T
Q105 2SC4617TL-QR
IIC2-BUS
H:RESET (Rx-Config)
MM/HDCU1000 Series
7-57
7-57
EN-159A (1/4)
BOARD NO. 1-868-002-11
HKCU1001_EN-159A_011_1

EN-159A (2/4)

7-58

EN-159A (2/4)

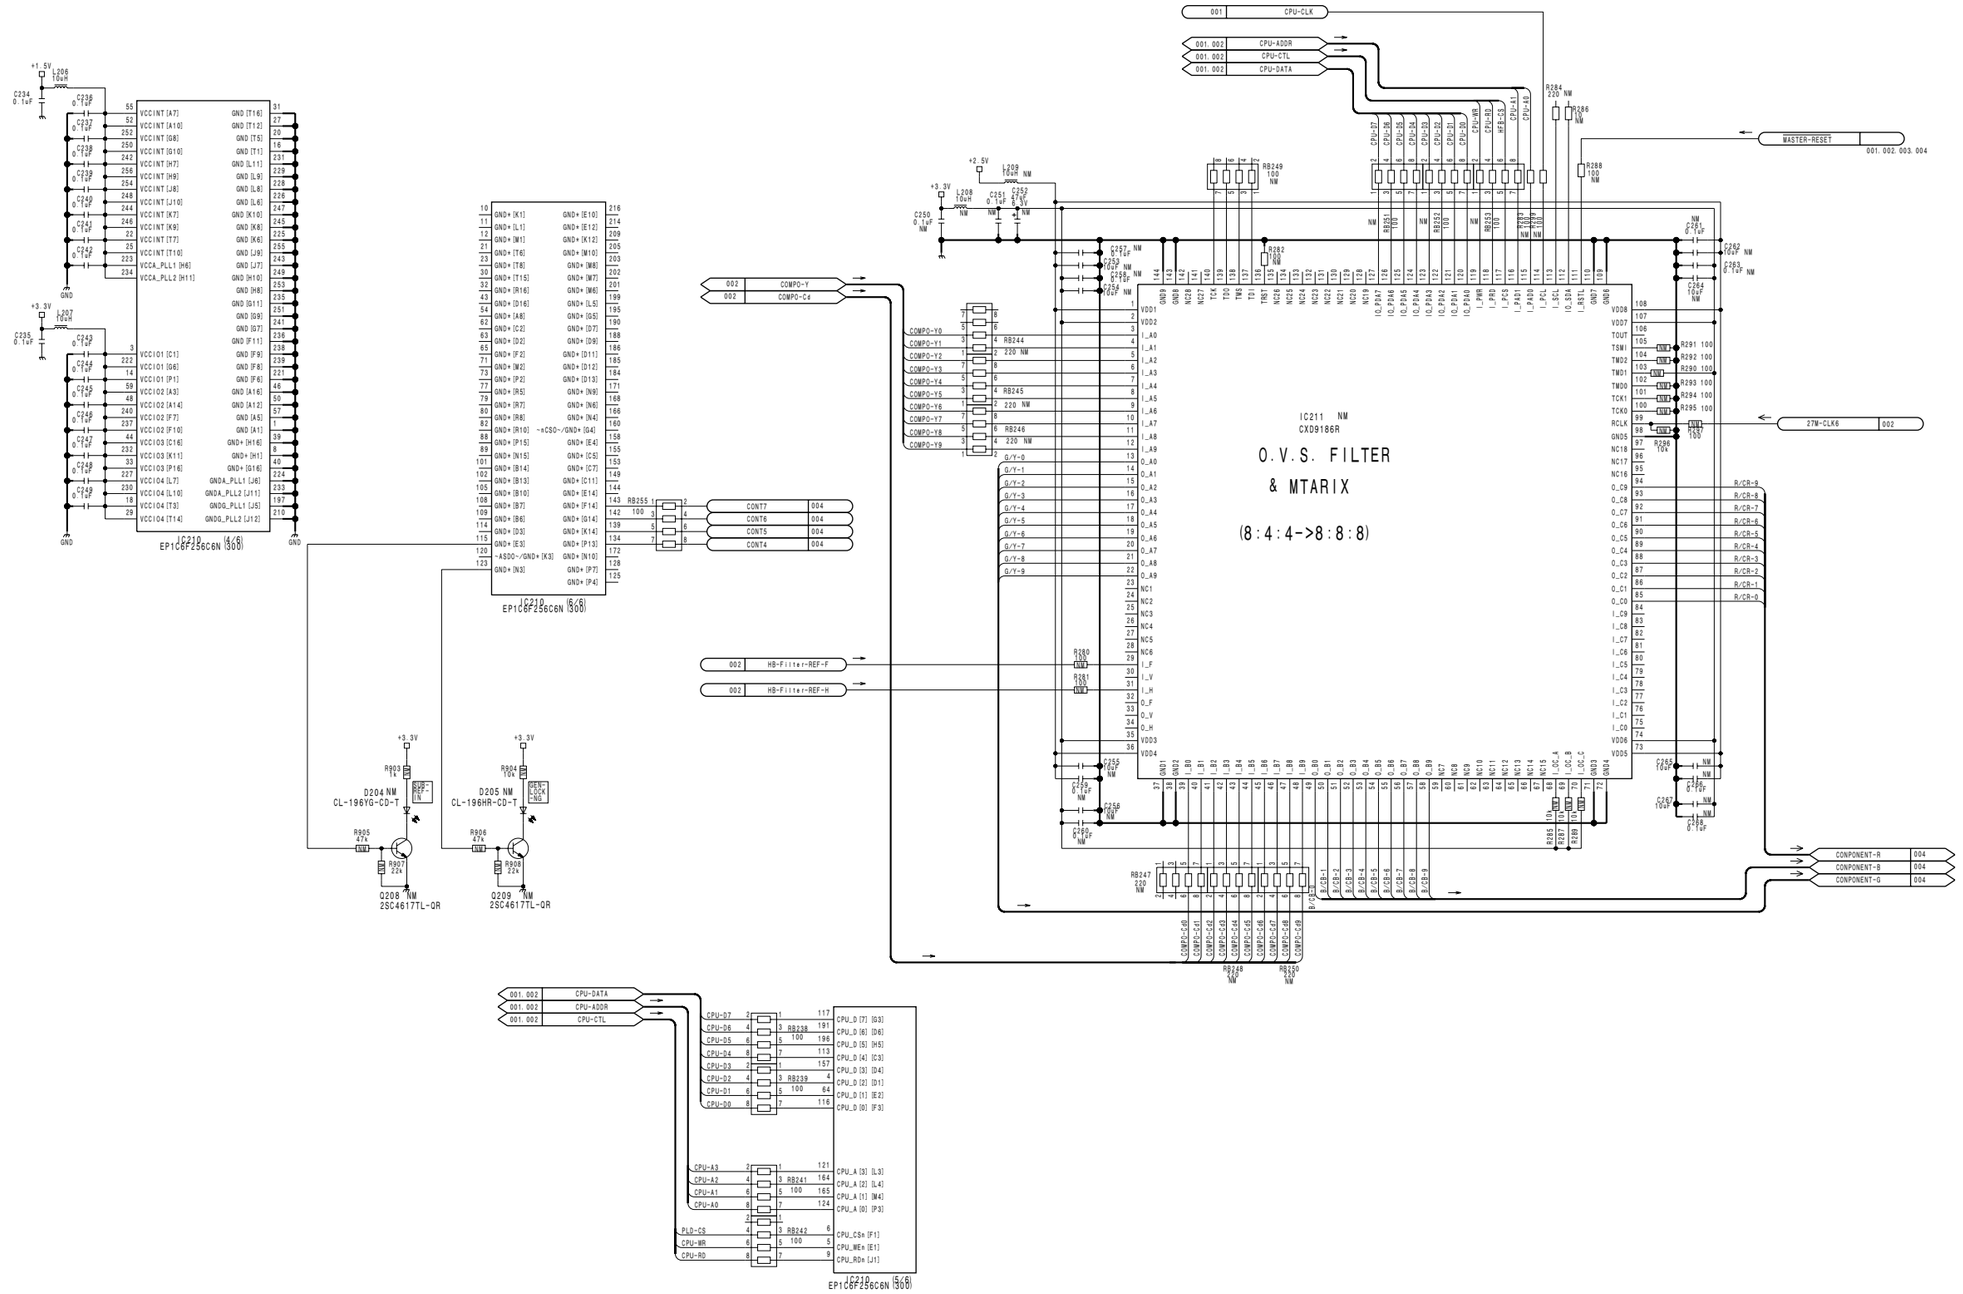

EN-159A (2/4)
BOARD NO. 1-868-002-11
HKCU1001_EN-159A_011_2

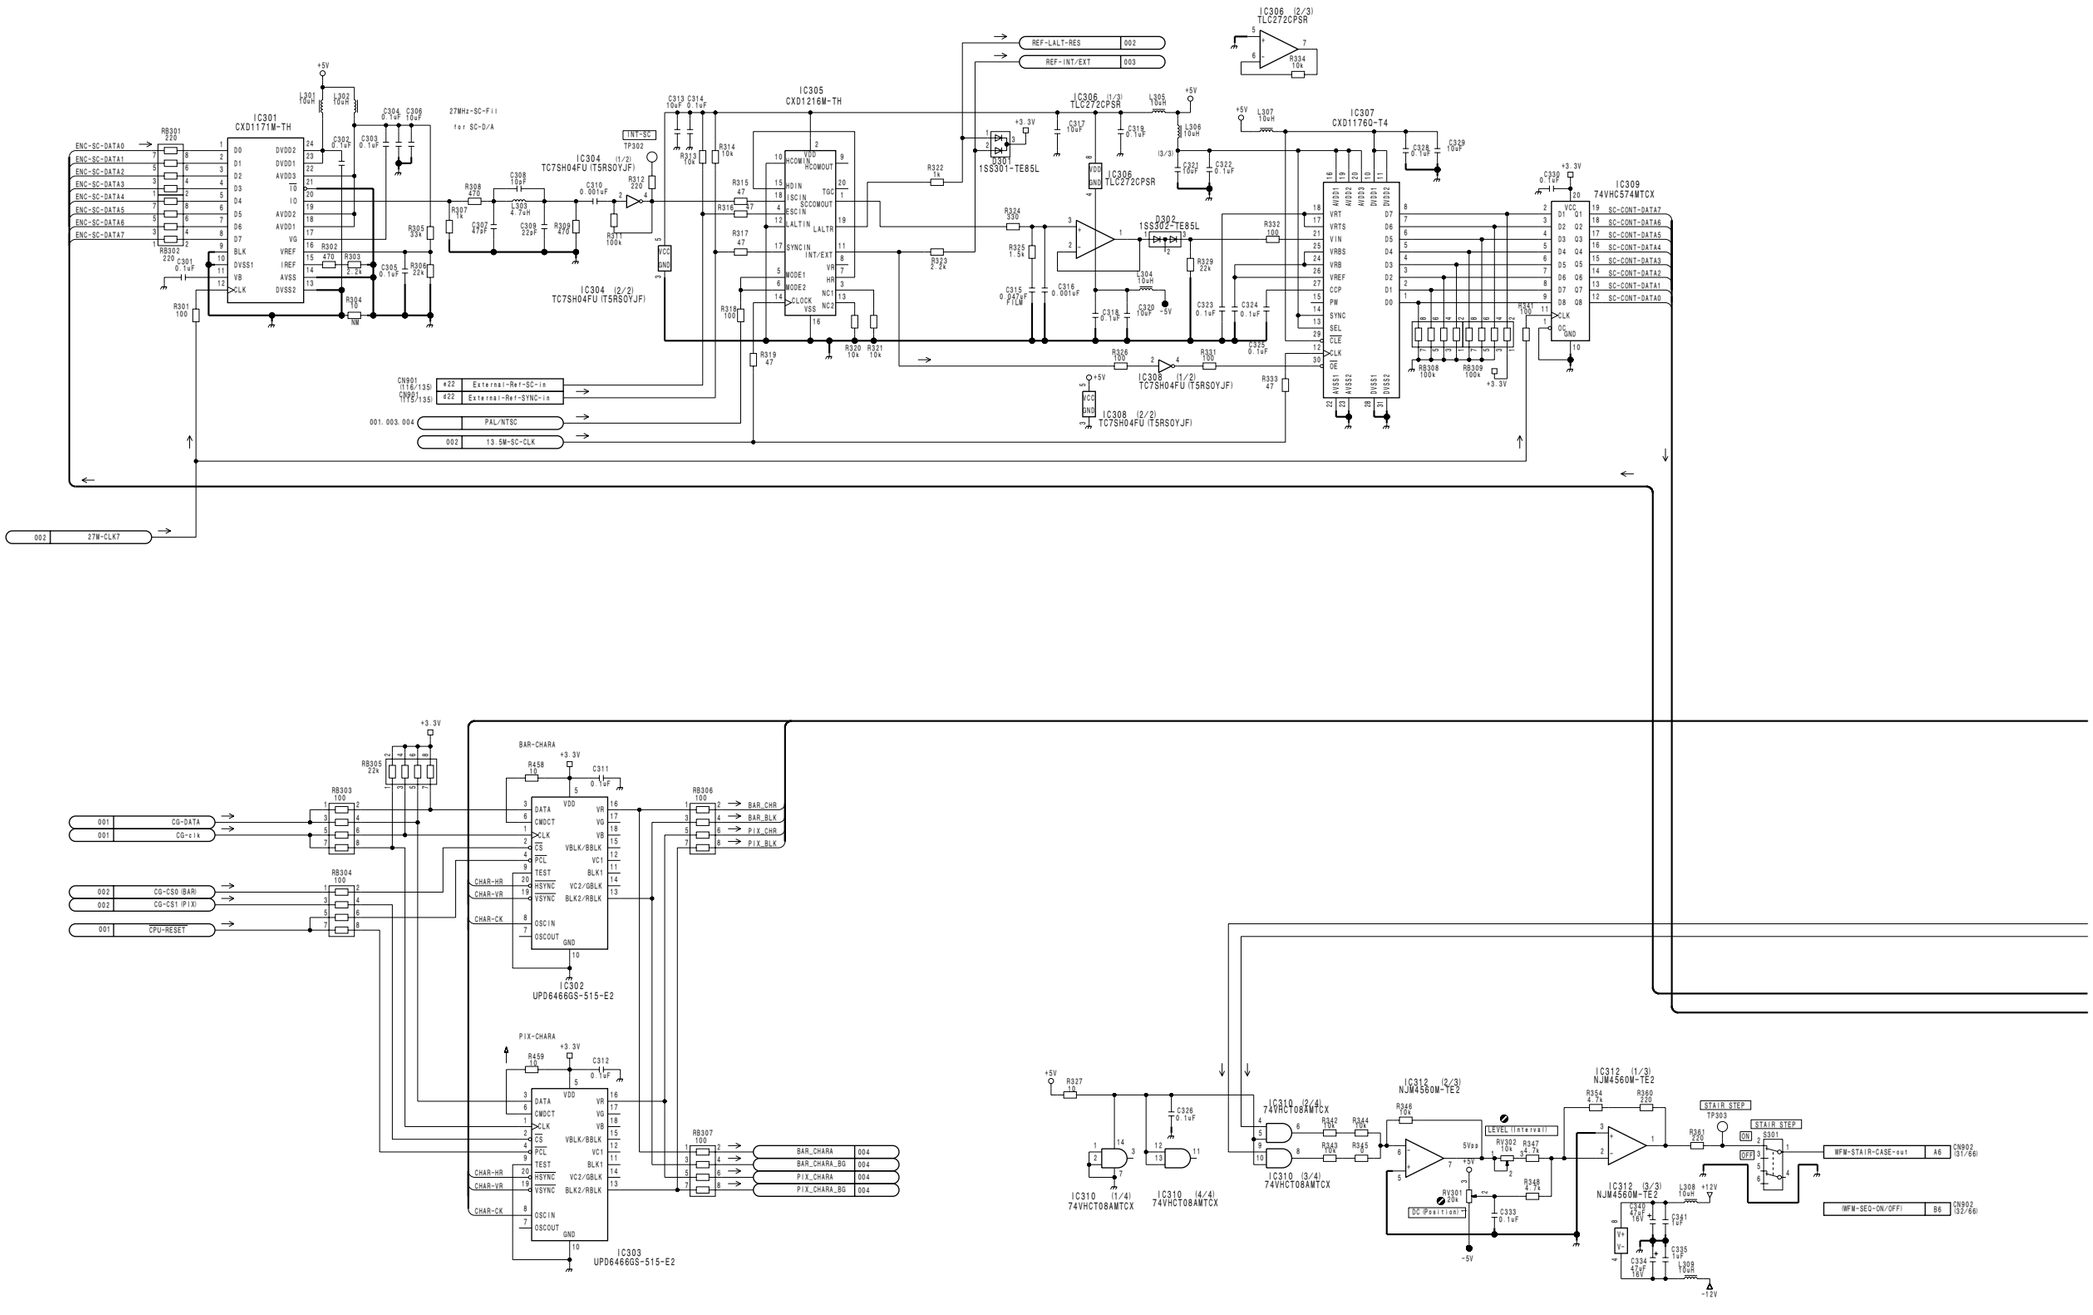
IC301 CXD1171M-TH
IC304 TC7SH04FU (TSRSOYJF)
IC305 CXD1216M-TH
IC306 TLC272CPSR
IC307 CXD1176Q-T4
IC309 74VHC574MTCX
IC308 TC7SH04FU (TSRSOYJF)
IC310 74VHCT08AMTCX
IC312 NJM4560M-TE2
IC302 UPD6466GS-515-E2
IC303 UPD6466GS-515-E2
1SS301-TE85L
1SS322-TE85L
ENC-SC-DATA0
ENC-SC-DATA1
ENC-SC-DATA2
ENC-SC-DATA3
ENC-SC-DATA4
ENC-SC-DATA5
ENC-SC-DATA6
ENC-SC-DATA7
27MHz-SC-Fil for SC-D/A
INT-SC
REF-LALT-RES
REF-INT/EXT
External-Ref-SC-in
External-Ref-SYNC-in
PAL/NMTSC
13.5M-SC-CLK
27M-CLK7
CG-DATA
CG-clk
CG-CS0 (BAR)
CG-CS1 (PIX)
CPU-RESET
BAR-CHARA
PIX-CHARA
BAR_CHR
BAR_BLK
PIX_CHR
PIX_BLK
BAR_CHARA
BAR_CHARA_BG
PIX_CHARA
PIX_CHARA_BG
SC-CONT-DATA7
SC-CONT-DATA6
SC-CONT-DATA5
SC-CONT-DATA4
SC-CONT-DATA3
SC-CONT-DATA2
SC-CONT-DATA1
SC-CONT-DATA0
STAIR STEP
LEVEL (Interval)
SC Position
WFM-STAIR-CASE-out
WFM-SEQ-ON/OFF)

EN-159A (3/4)

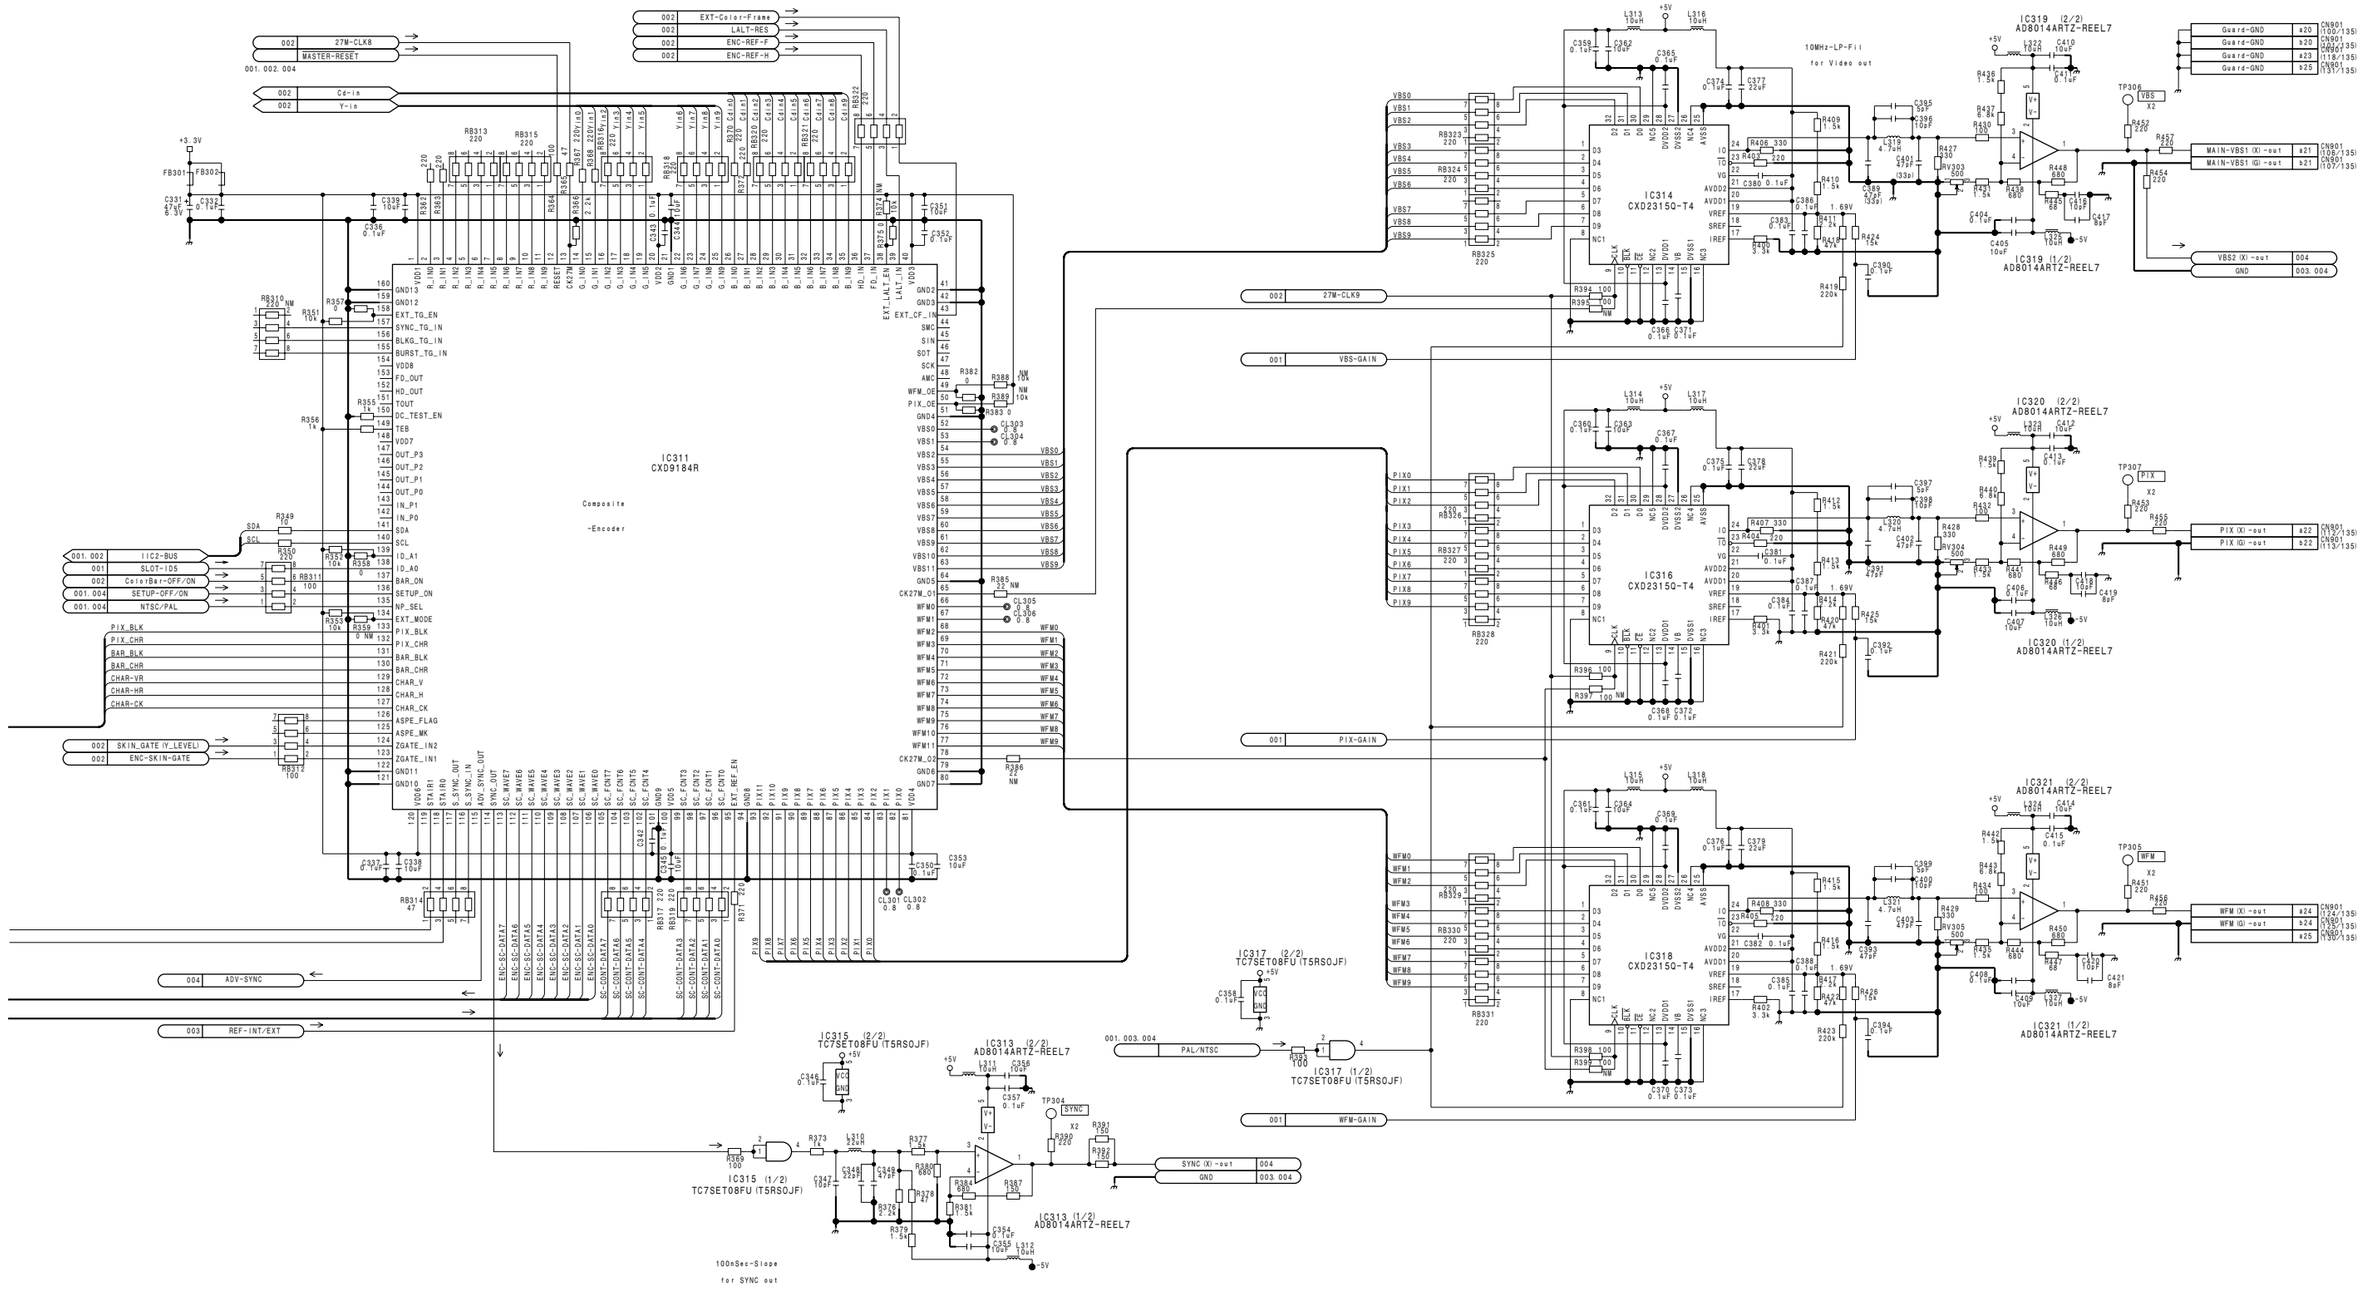

EN-159A (3/4)

BOARD NO. 1-868-002-11

HKCU1001_EN-159A_011_3

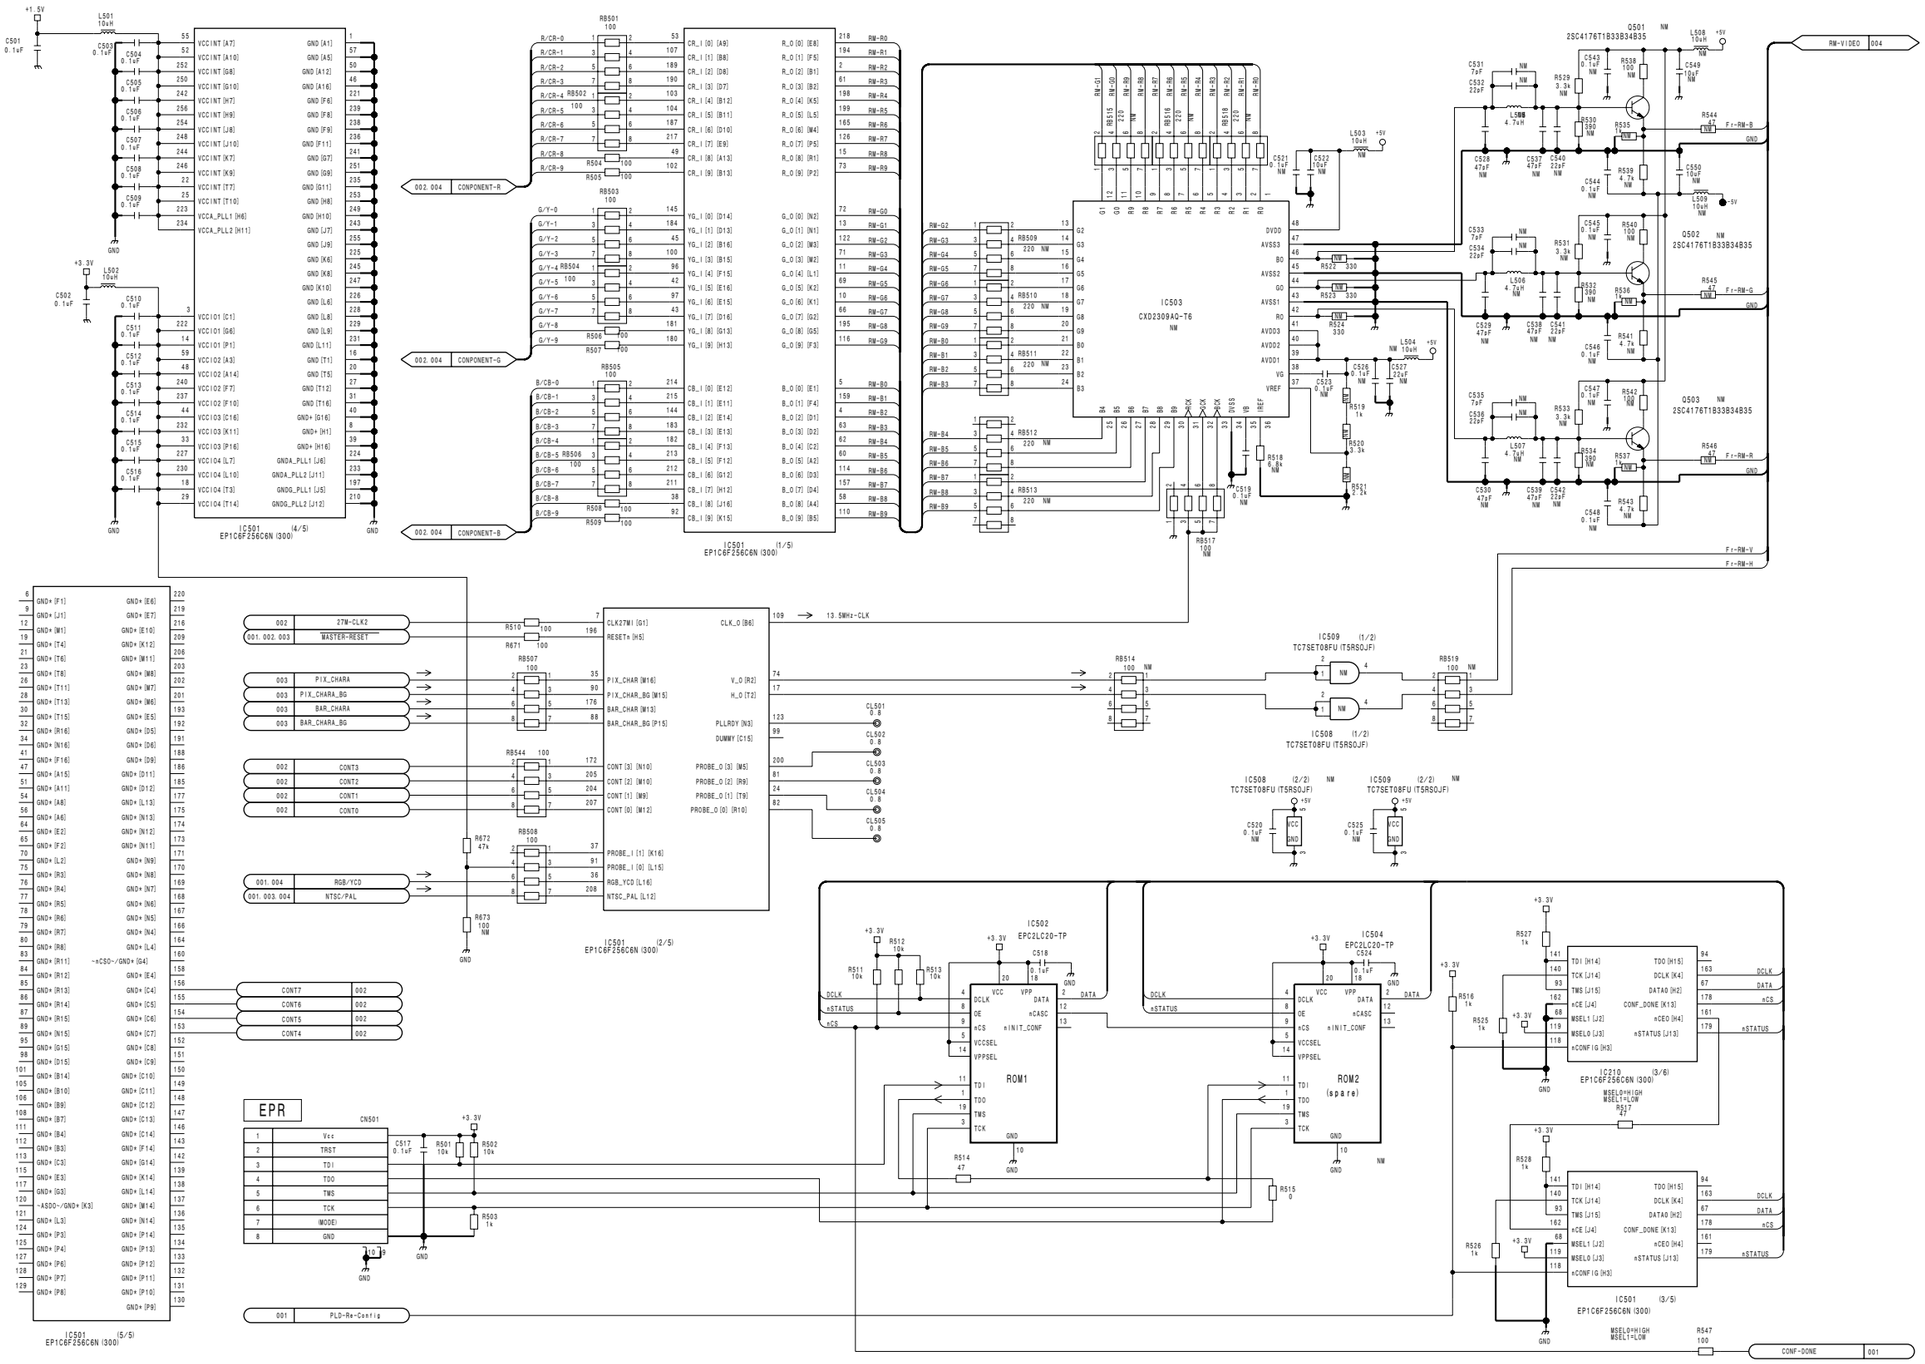
IC501 (4/5) EP1C6F256C6N (300)
IC501 (1/5) EP1C6F256C6N (300)
IC501 (2/5) EP1C6F256C6N (300)
IC501 (5/5) EP1C6F256C6N (300)
IC503 CXD2309AQ-T6
IC502 EPC2LC20-TP
IC504 EPC2LC20-TP
ROM1
ROM2 (spare)
IC509 (1/2) TC7SET08FU (T5RSOJF)
IC508 (1/2) TC7SET08FU (T5RSOJF)
IC508 (2/2) TC7SET08FU (T5RSOJF)
IC509 (2/2) TC7SET08FU (T5RSOJF)
IC210 EP1C6F256C6N (300) (3/6)
IC501 (3/5) EP1C6F256C6N (300)
EPR
CN501
Q501 2SC4176T1B33B34B35
Q502 2SC4176T1B33B34B35
Q503 2SC4176T1B33B34B35
RW-V|DEO
Fr-RW-B
Fr-RW-G
Fr-RW-R
Fr-RW-V
Fr-RW-H
13.5MHz-CLK
27M-CLK2
MASTER-RESET
PIX_CHARA
PIX_CHARA_BG
BAR_CHARA
BAR_CHARA_BG
CONT3
CONT2
CONT1
CONT0
RGB/YCD
NTSC/PAL
CONT7
CONT6
CONT5
CONT4
PLD-Rx-Config
CONF-DONE
CONPONENT-R
CONPONENT-G
CONPONENT-B
MSEL0=HIGH MSEL1=LOW

EN-159A (4/4)

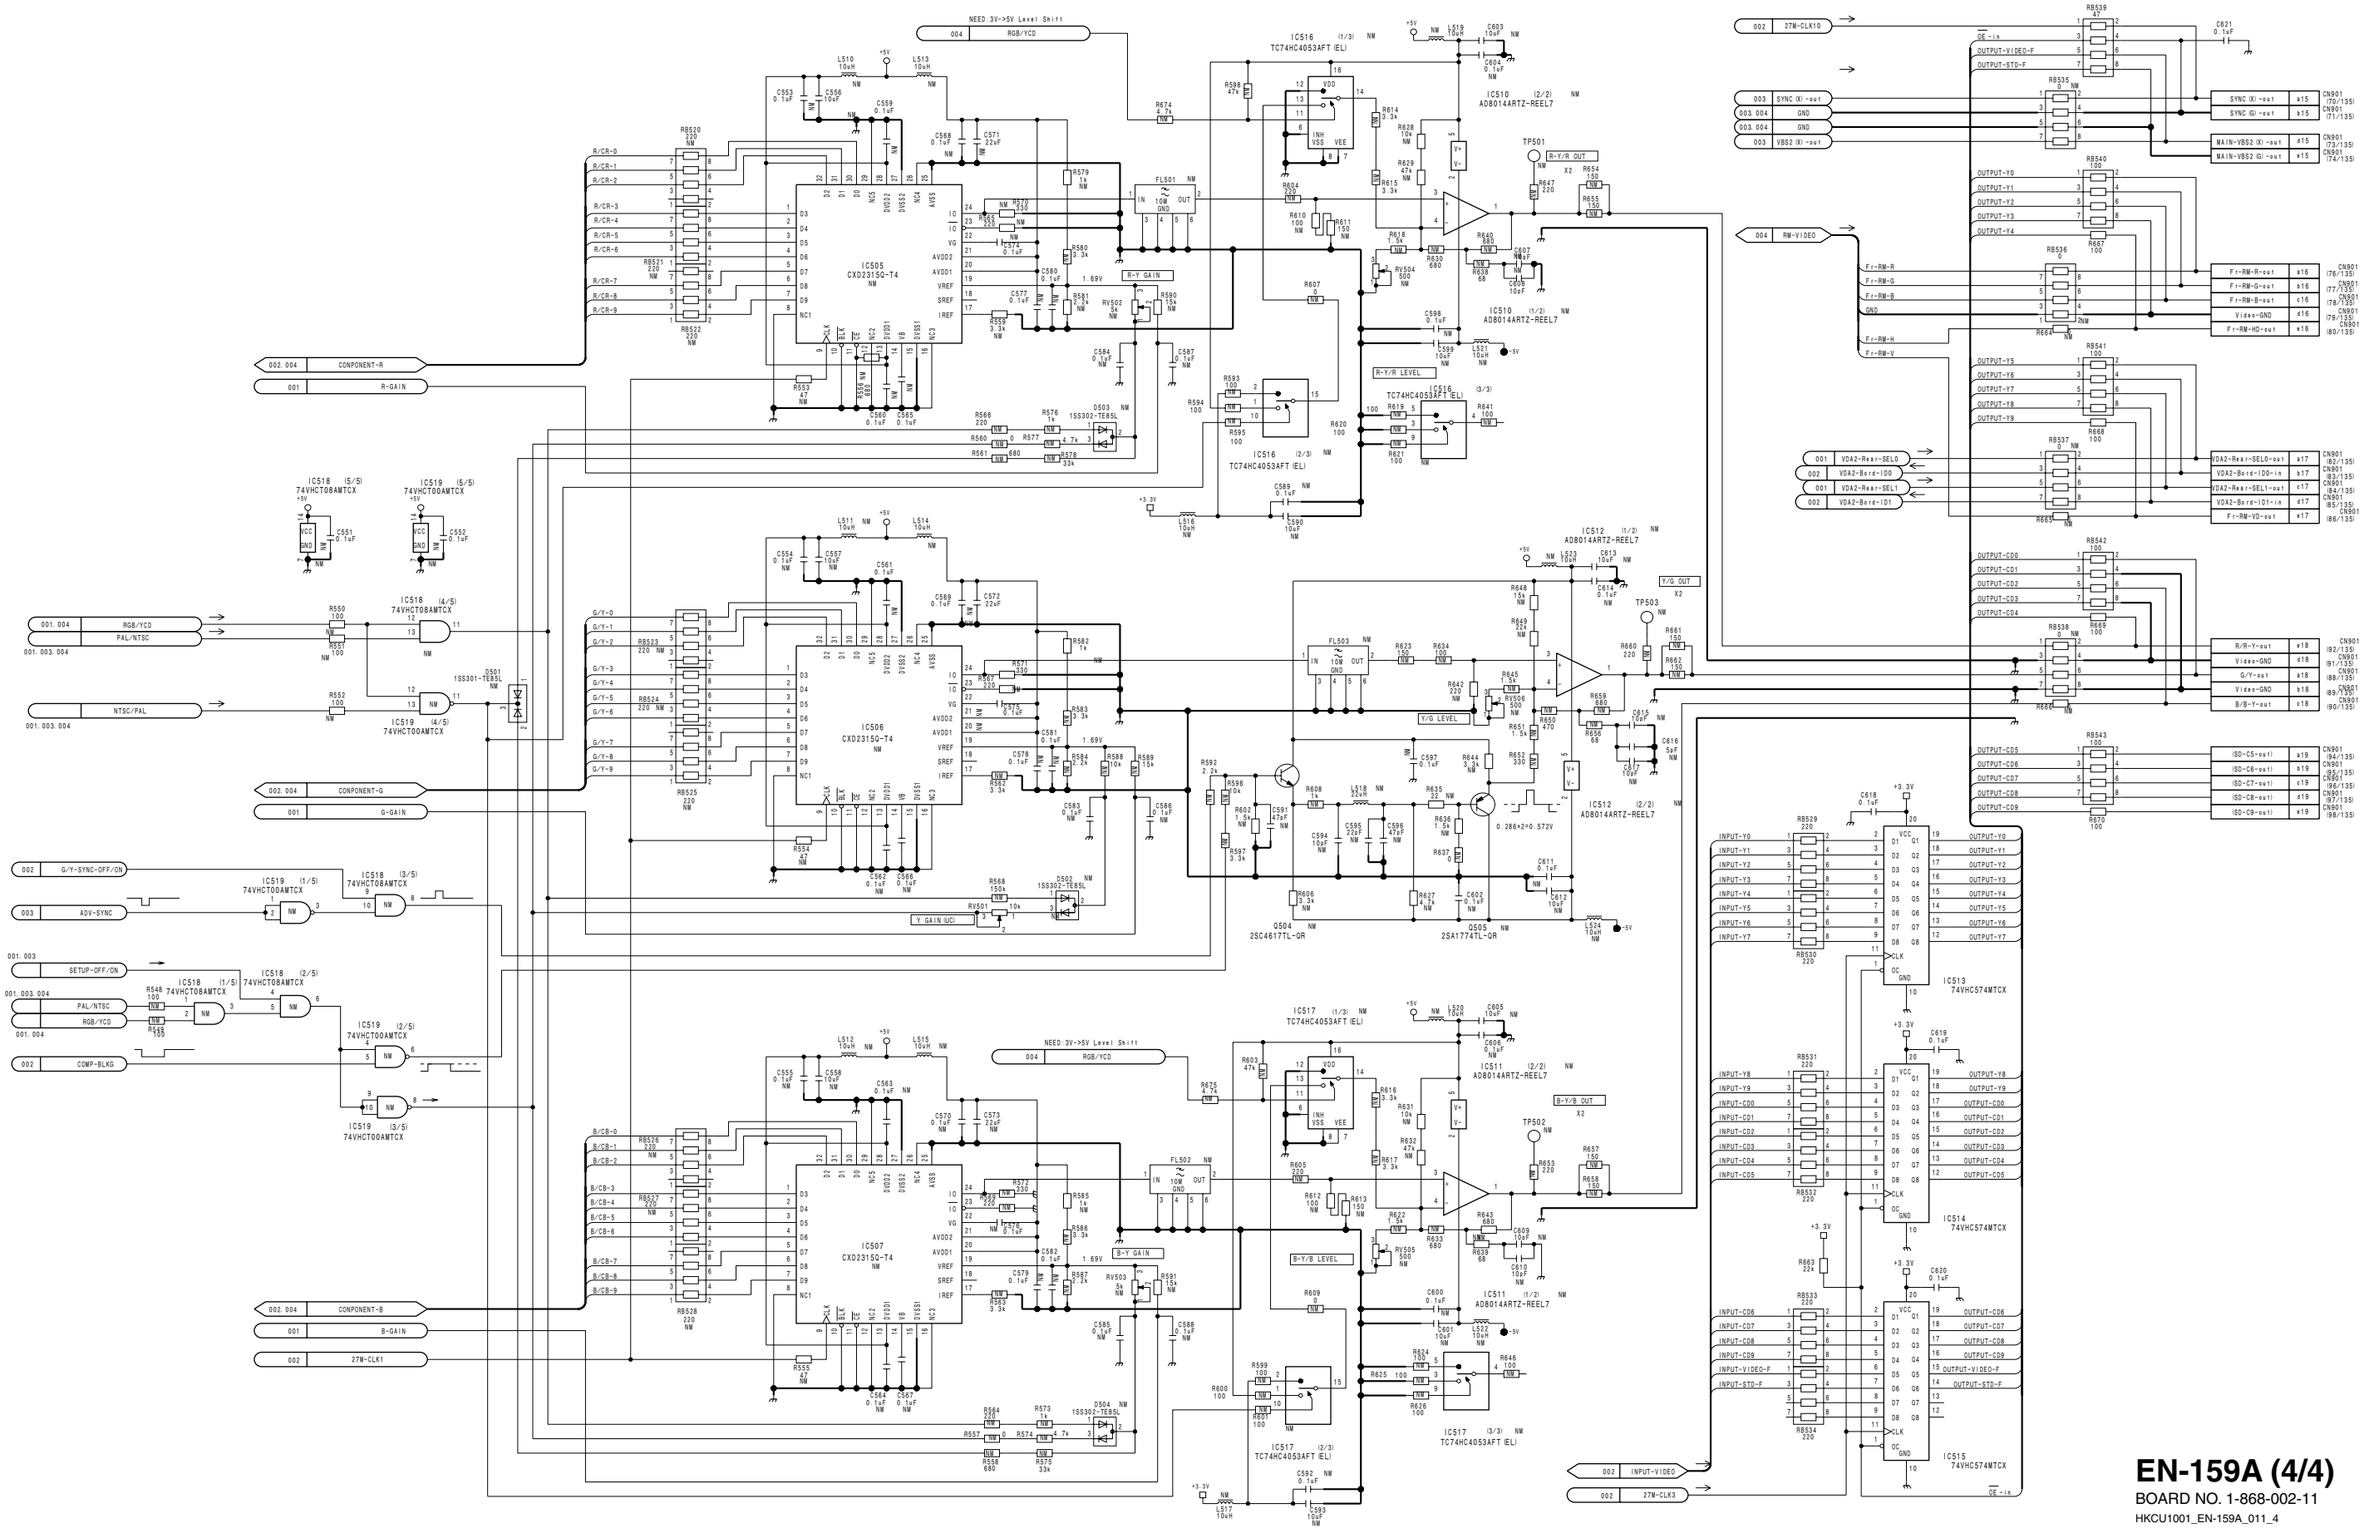

EN-159A (4/4)

BOARD NO. 1-868-002-11

HKCU1001_EN-159A_011_4

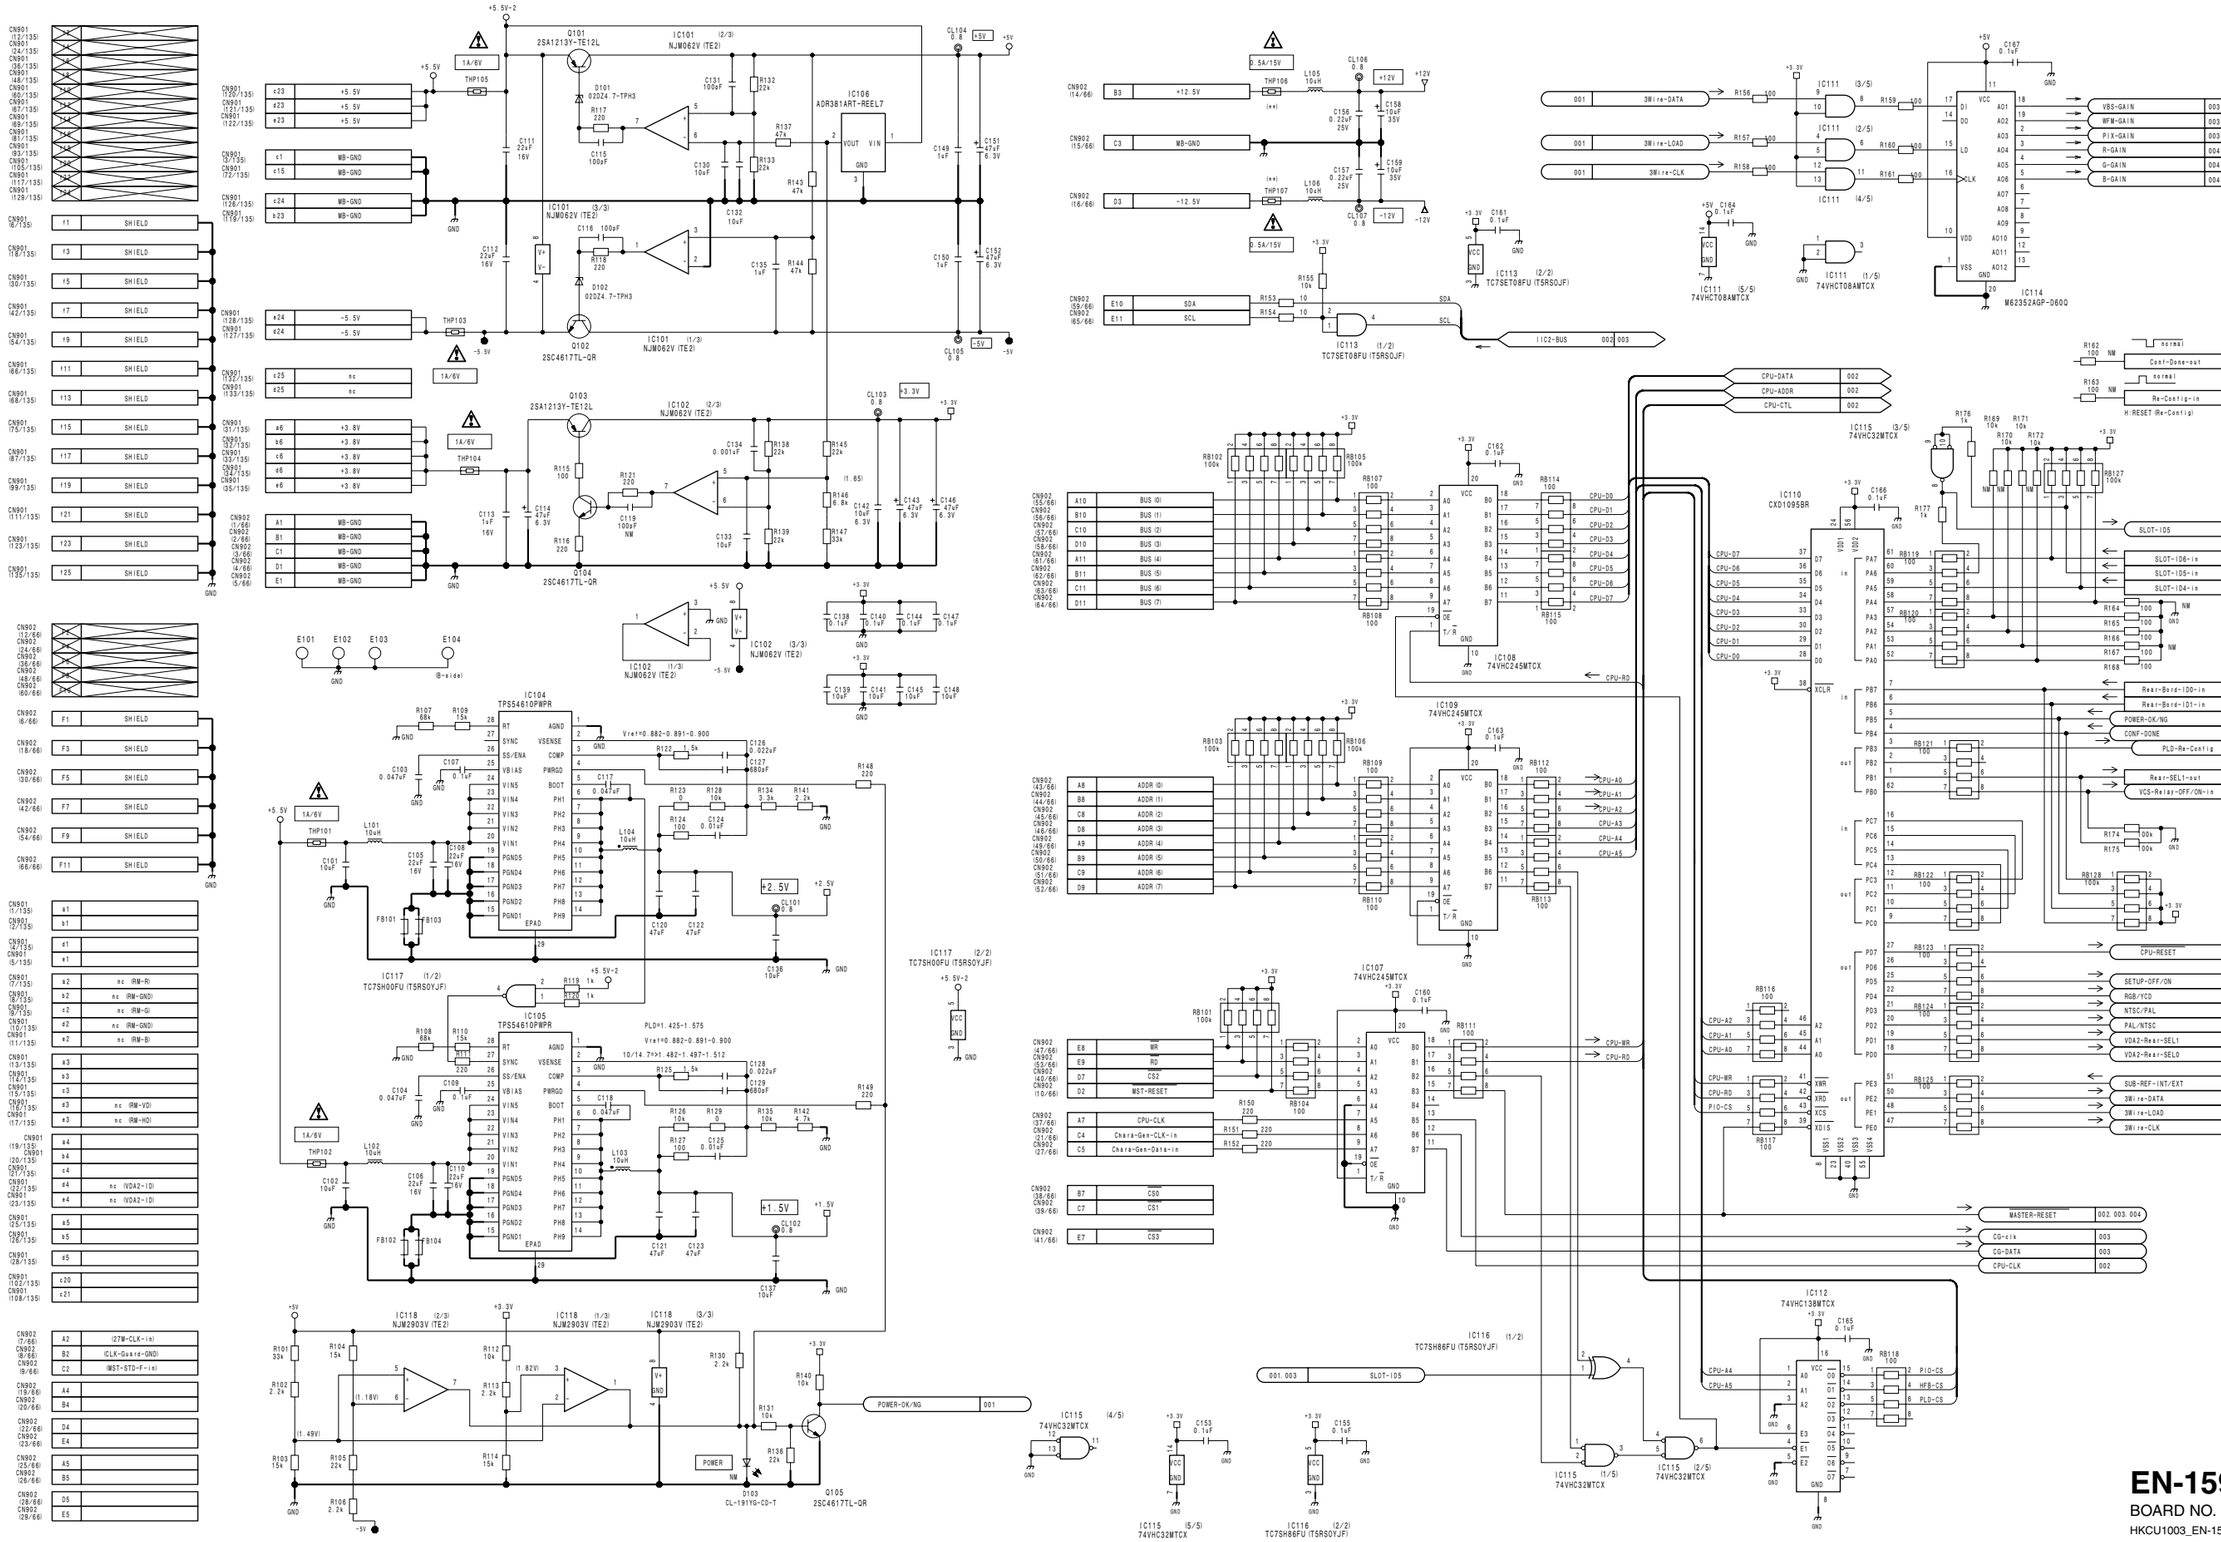

EN-159B (1/4)

BOARD NO. 1-868-002-11

HKCU1003_EN-159B_011_1

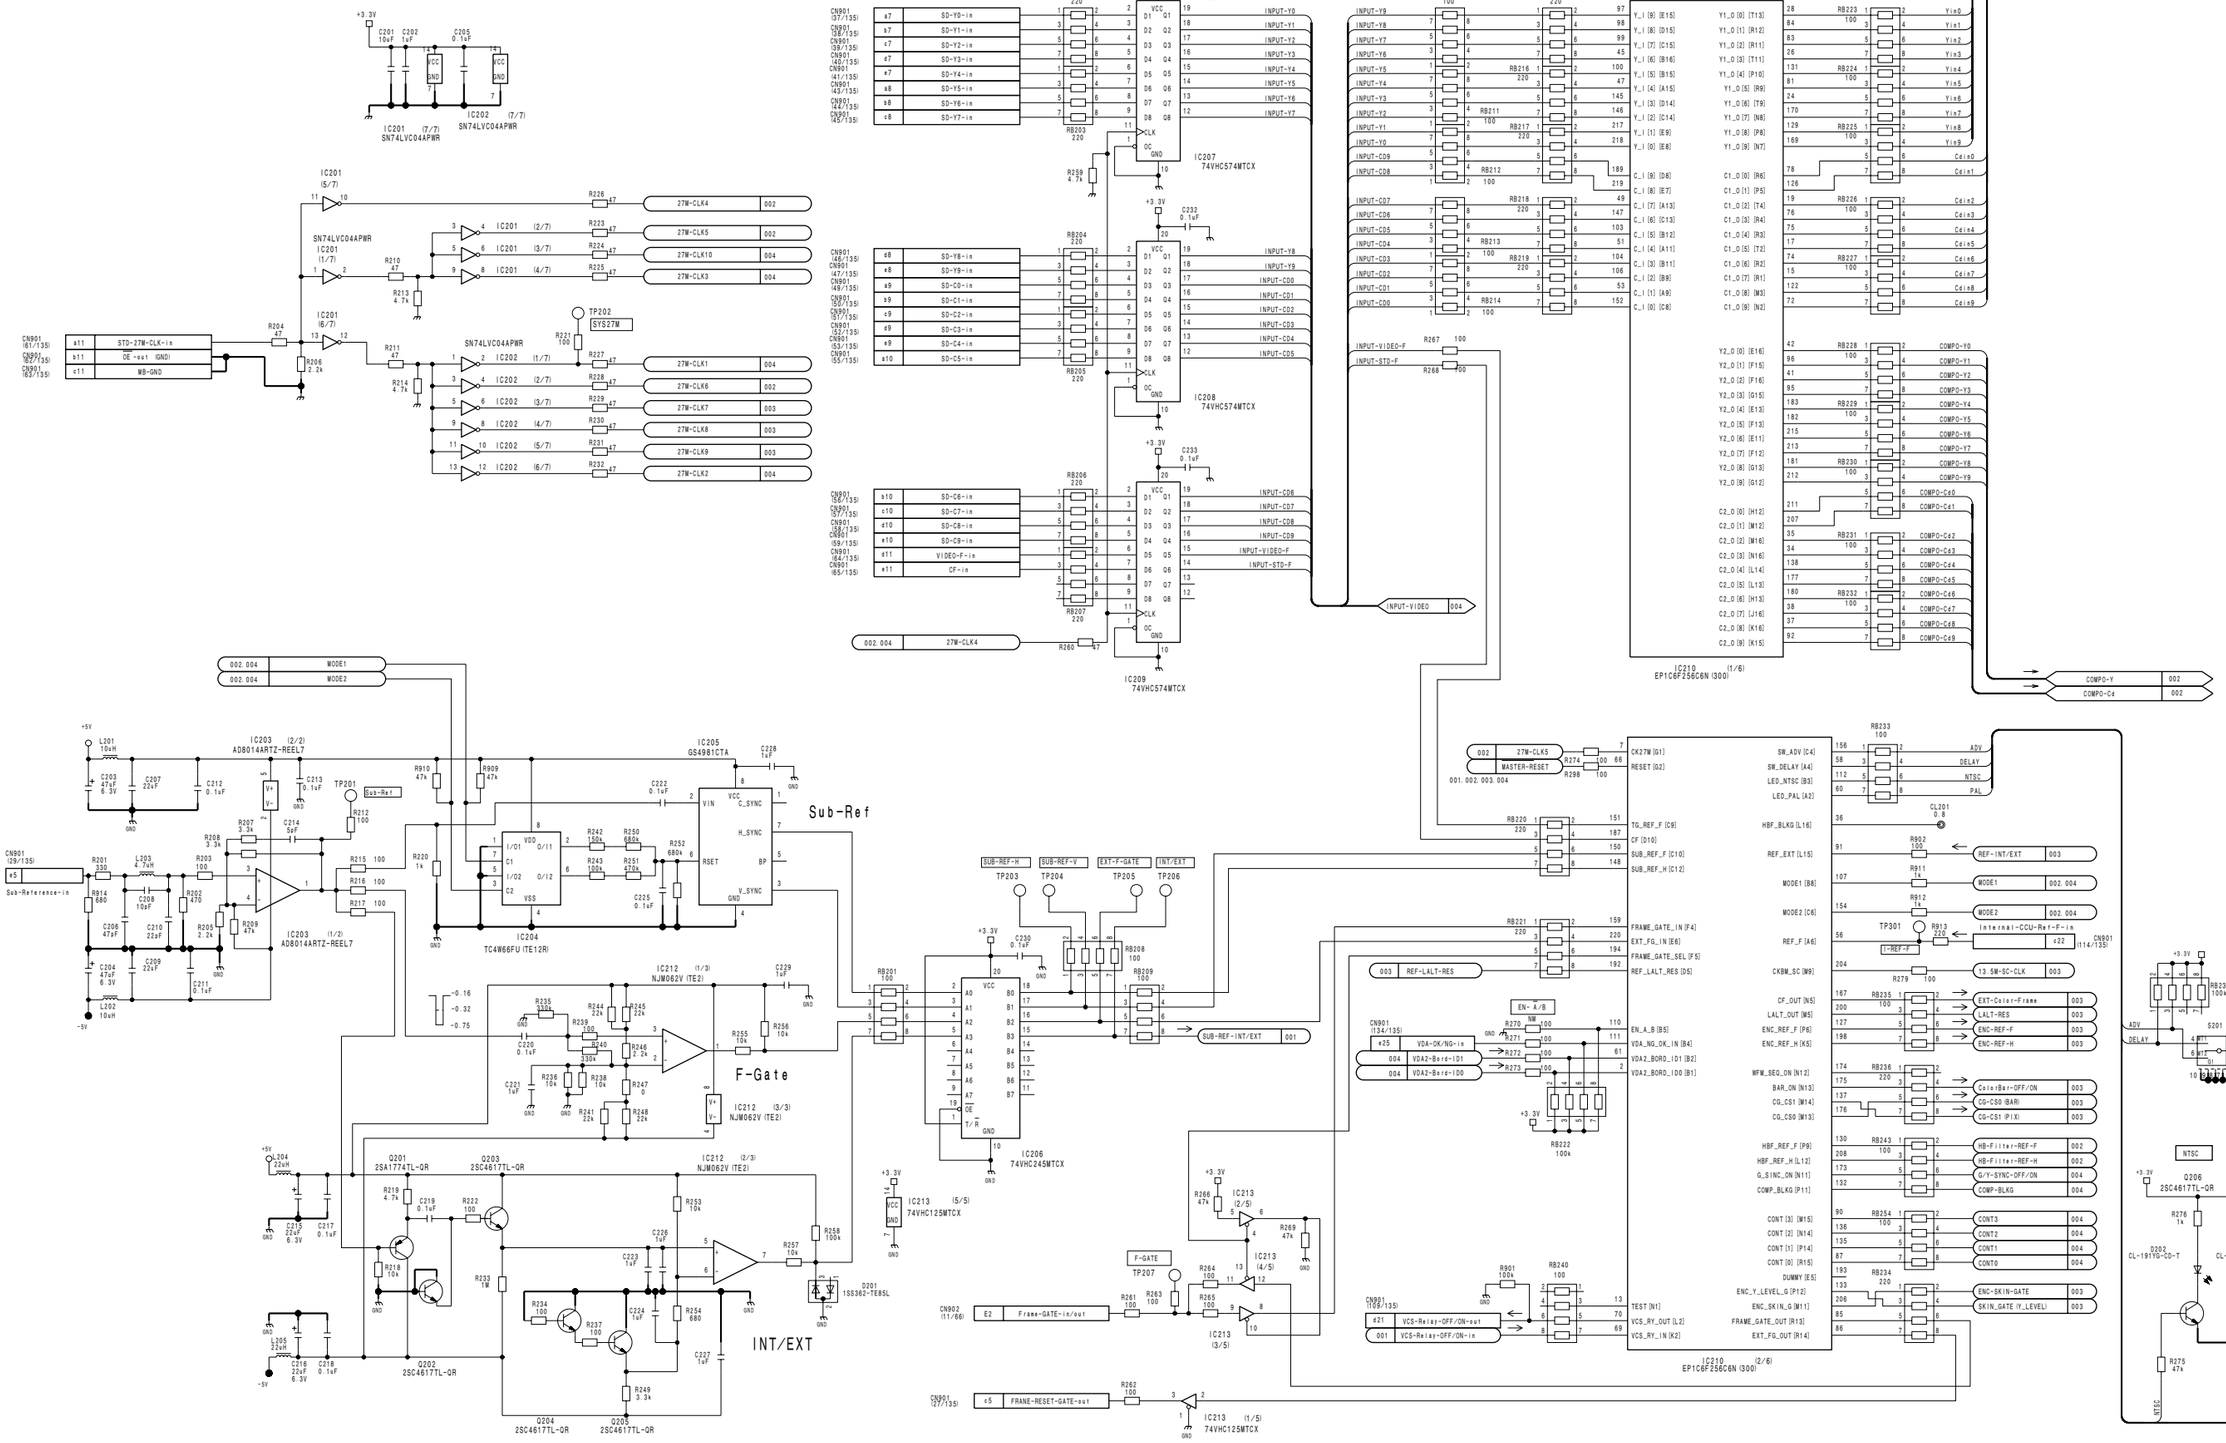
IC201 (7/7) SN74LVC04APWR
IC202 (7/7) SN74LVC04APWR
IC201 (5/7) SN74LVC04APWR
IC201 (1/7)
IC201 (2/7)
IC201 (3/7)
IC201 (4/7)
IC201 (6/7)
IC202 (1/7)
IC202 (2/7)
IC202 (3/7)
IC202 (4/7)
IC202 (5/7)
IC202 (6/7)
27M-CLK4
27M-CLK5
27M-CLK10
27M-CLK3
27M-CLK1
27M-CLK6
27M-CLK7
27M-CLK8
27M-CLK9
27M-CLK2
TP202 SYS27M
IC207 74VHC574MTCX
IC208 74VHC574MTCX
IC209 74VHC574MTCX
IC210 EP1C6F256C6N (300) (1/6)
IC210 EP1C6F256C6N (300) (2/6)
IC203 (2/2) AD8014ARTZ-REEL7
IC203 (1/2) AD8014ARTZ-REEL7
IC204 TC4W66FU (TE12R)
IC205 GS4981CTA
IC206 74VHC245MTCX
IC212 (1/3) NJM062V (TE2)
IC212 (2/3) NJM062V (TE2)
IC212 (3/3) NJM062V (TE2)
IC213 (5/5) 74VHC125MTCX
IC213 (2/5)
IC213 (4/5)
IC213 (3/5)
IC213 (1/5) 74VHC125MTCX
Sub-Ref
F-Gate
INT/EXT
INPUT-VIDEO
Y-in
Cd-in
COMPO-Y
COMPO-C4
SC PHASE
ADV
DELAY
NTSC
PAL
MODE1
MODE2
REF-INT/EXT
REF-LALT-RES
Internal-CCU-Ref-F-in
13.5M-SC-CLK
EXT-Color-Frame
LALT-RES
ENC-REF-F
ENC-REF-H
CxbarBar-OFF/ON
CG-CS0 (BAR)
CG-CS1 (PIX)
HB-Filter-REF-F
HB-Filter-REF-H
G/Y-SYNC-OFF/ON
COMP-BLKG
CONT3
CONT2
CONT1
CONT0
ENC-SKIN-GATE
SKIN_GATE (Y_LEVEL)
VCS-Relay-OFF/ON-out
VCS-Relay-OFF/ON-in
Frame-GATE-in/out
FRANE-RESET-GATE-out
SUB-REF-INT/EXT
SUB-REF-H
SUB-REF-V
EXT-F-GATE
INT/EXT
TP203
TP204
TP205
TP206
TP207
TP301
SD-Y0-in
SD-Y1-in
SD-Y2-in
SD-Y3-in
SD-Y4-in
SD-Y5-in
SD-Y6-in
SD-Y7-in
SD-Y8-in
SD-Y9-in
SD-C0-in
SD-C1-in
SD-C2-in
SD-C3-in
SD-C4-in
SD-C5-in
SD-C6-in
SD-C7-in
SD-C8-in
SD-C9-in
VIDEO-F-in
CF-in
Sub-Reference-in
STD-27M-CLK-in
OE -ext. GND!
MB-GND
VDA-OK/NG-in
VDA2-Bord-ID1
VDA2-Bord-ID0
27M-CLK5
MASTER-RESET
FRAME_GATE_IN [F4]
EXT_FG_IN [E6]
FRAME_GATE_SEL [F5]
REF_LALT_RES [D5]
REF_F [A6]
CKBW_SC [W9]
CF_OUT [N5]
LALT_OUT [N5]
ENC_REF_F [P6]
ENC_REF_H [K5]
BAR_ON [N13]
CG_CS1 [W14]
CG_CS0 [W13]
HBF_REF_F [P9]
HBF_REF_H [L12]
G_SYNC_ON [N11]
COMP_BLKG [P11]
CONT [3] [W15]
CONT [2] [N14]
CONT [1] [P14]
CONT [0] [R15]
DUMMY [E5]
ENC_Y_LEVEL_G [P12]
ENC_SKIN_G [W11]
FRAME_GATE_OUT [R13]
EXT_FG_OUT [R14]
TEST [N1]
VCS_RY_OUT [L2]
VCS_RY_IN [K2]
CK27W [G1]
RESET [G2]
SW_ADV [C4]
SW_DELAY [A4]
LED_NTSC [B3]
LED_PAL [A2]
HBF_BLKG [L16]
REF_EXT [L15]
TG_REF_F [C9]
CF [D10]
SUB_REF_F [C10]
SUB_REF_H [C12]
EN-A/B
VDA_NG_OK_IN [B4]
VDA2_BORD_ID1 [B2]
VDA2_BORD_ID0 [B1]
EN_A_B [B5]

EN-159B (2/4)

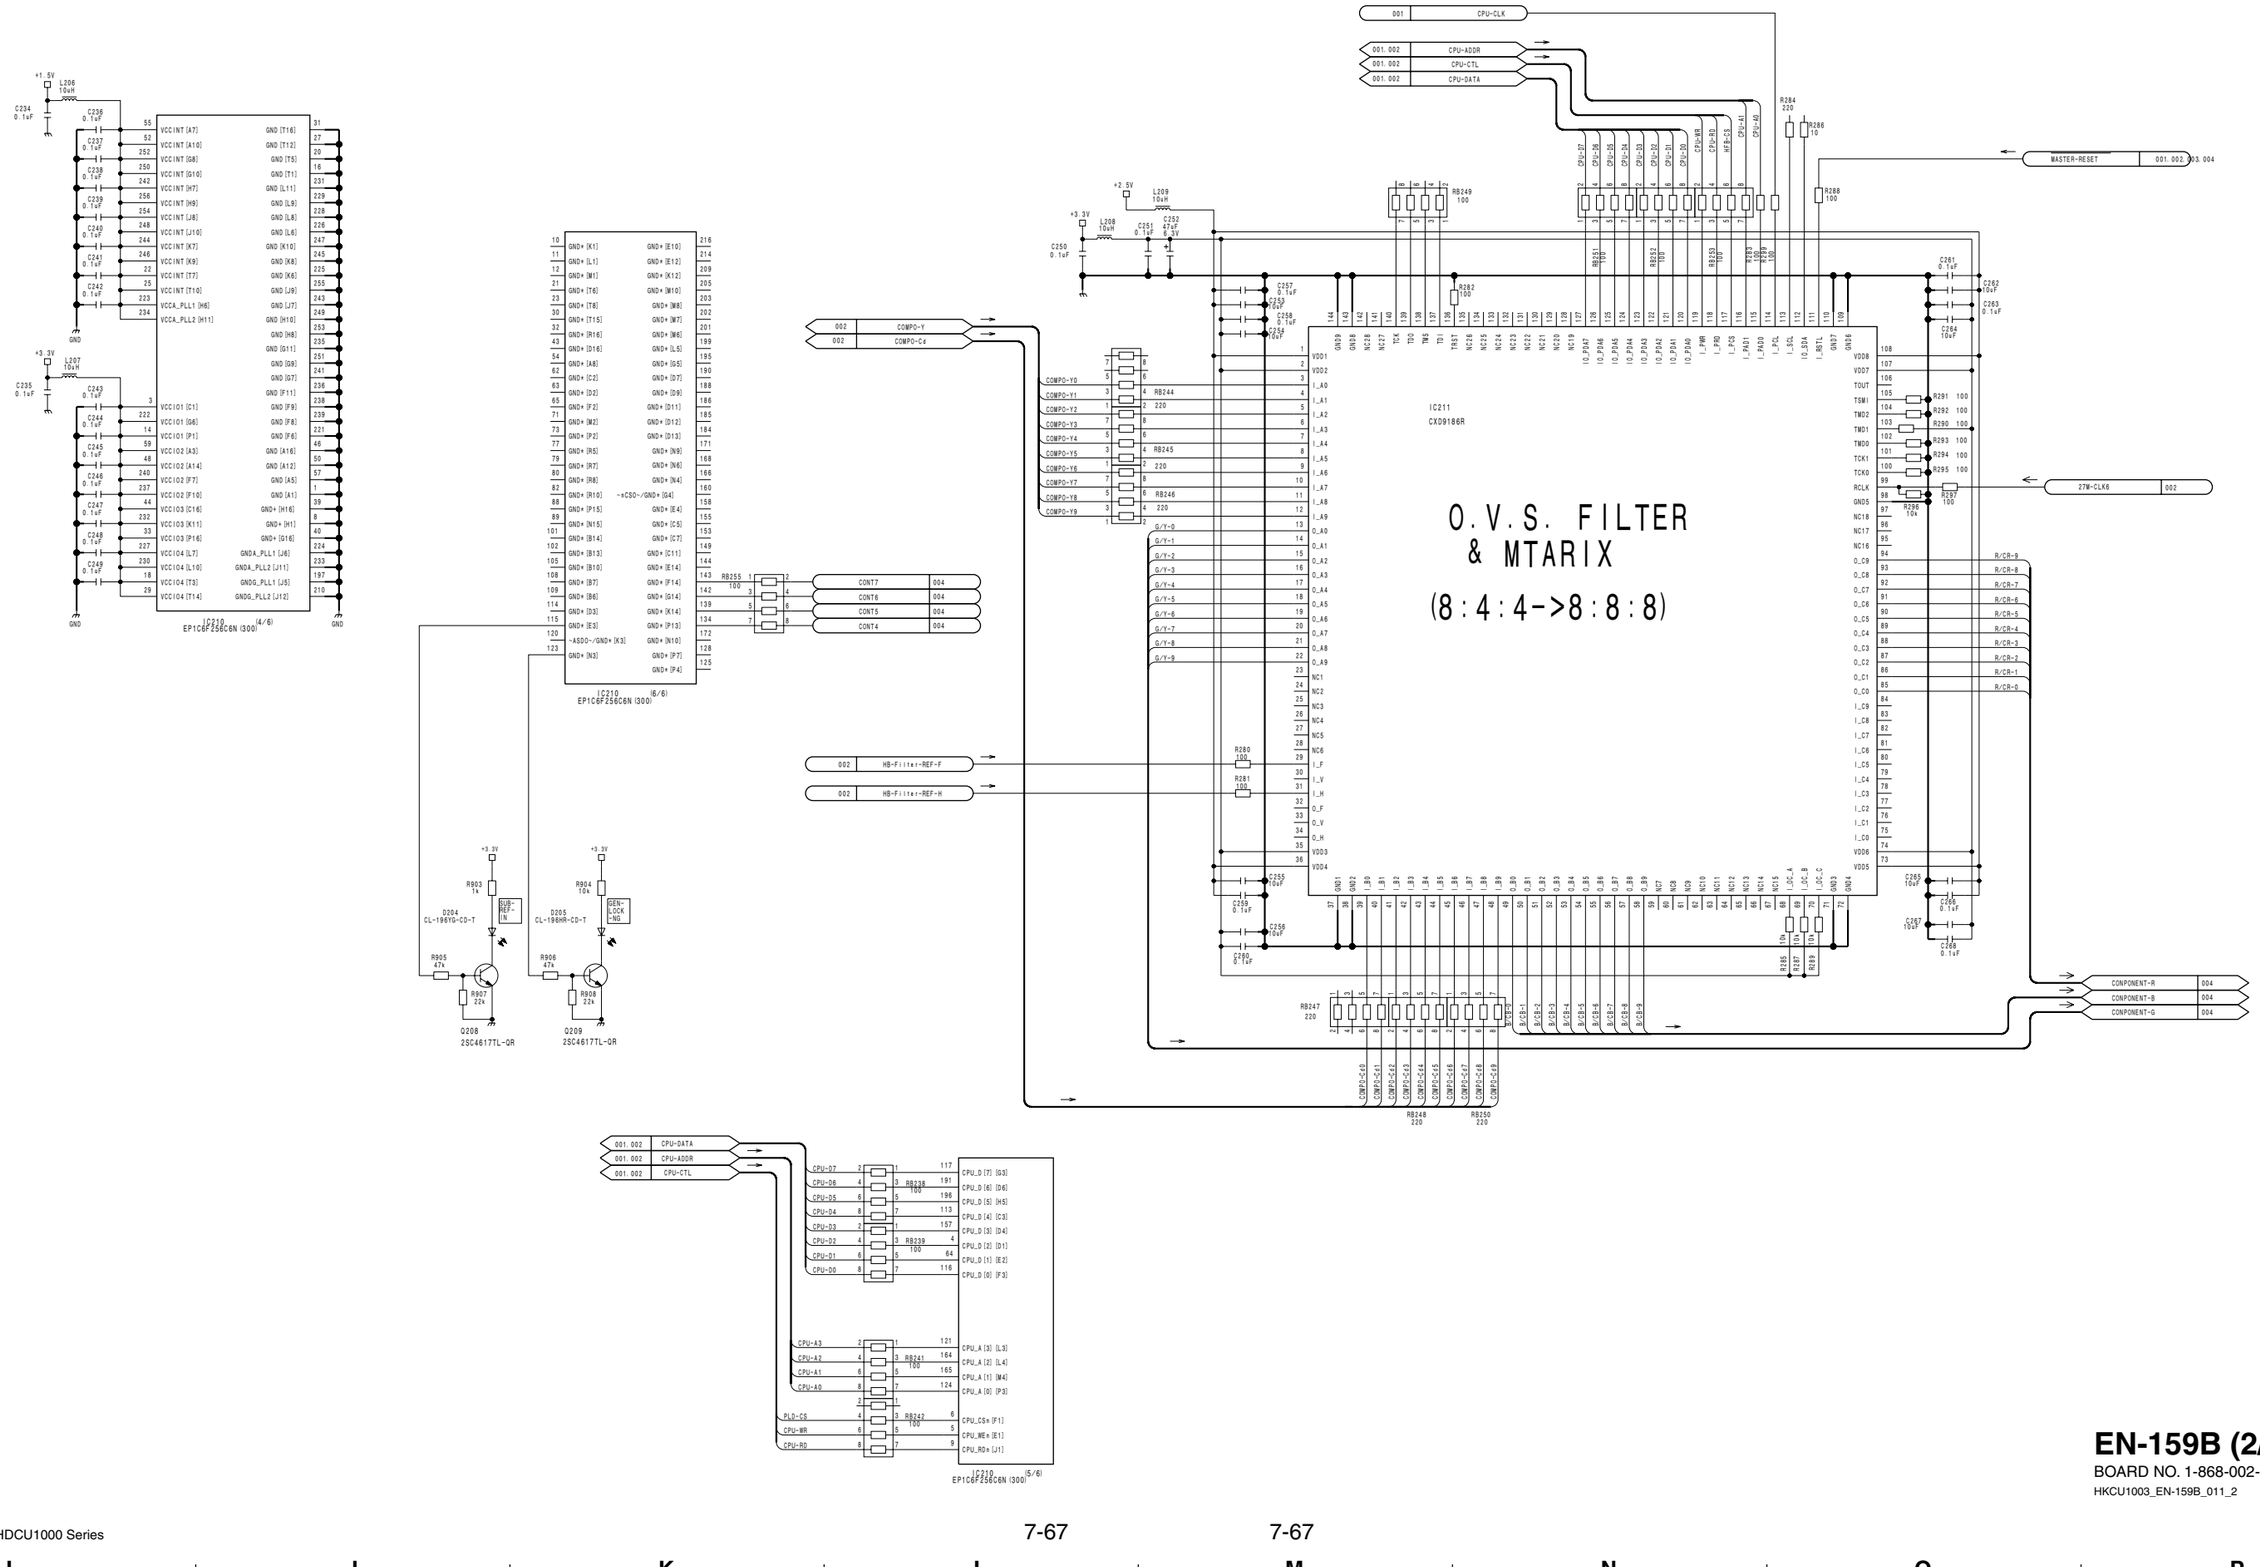

EN-159B (2/4)
BOARD NO. 1-868-002-11
HKCU1003_EN-159B_011_2

EN-159B (3/4)

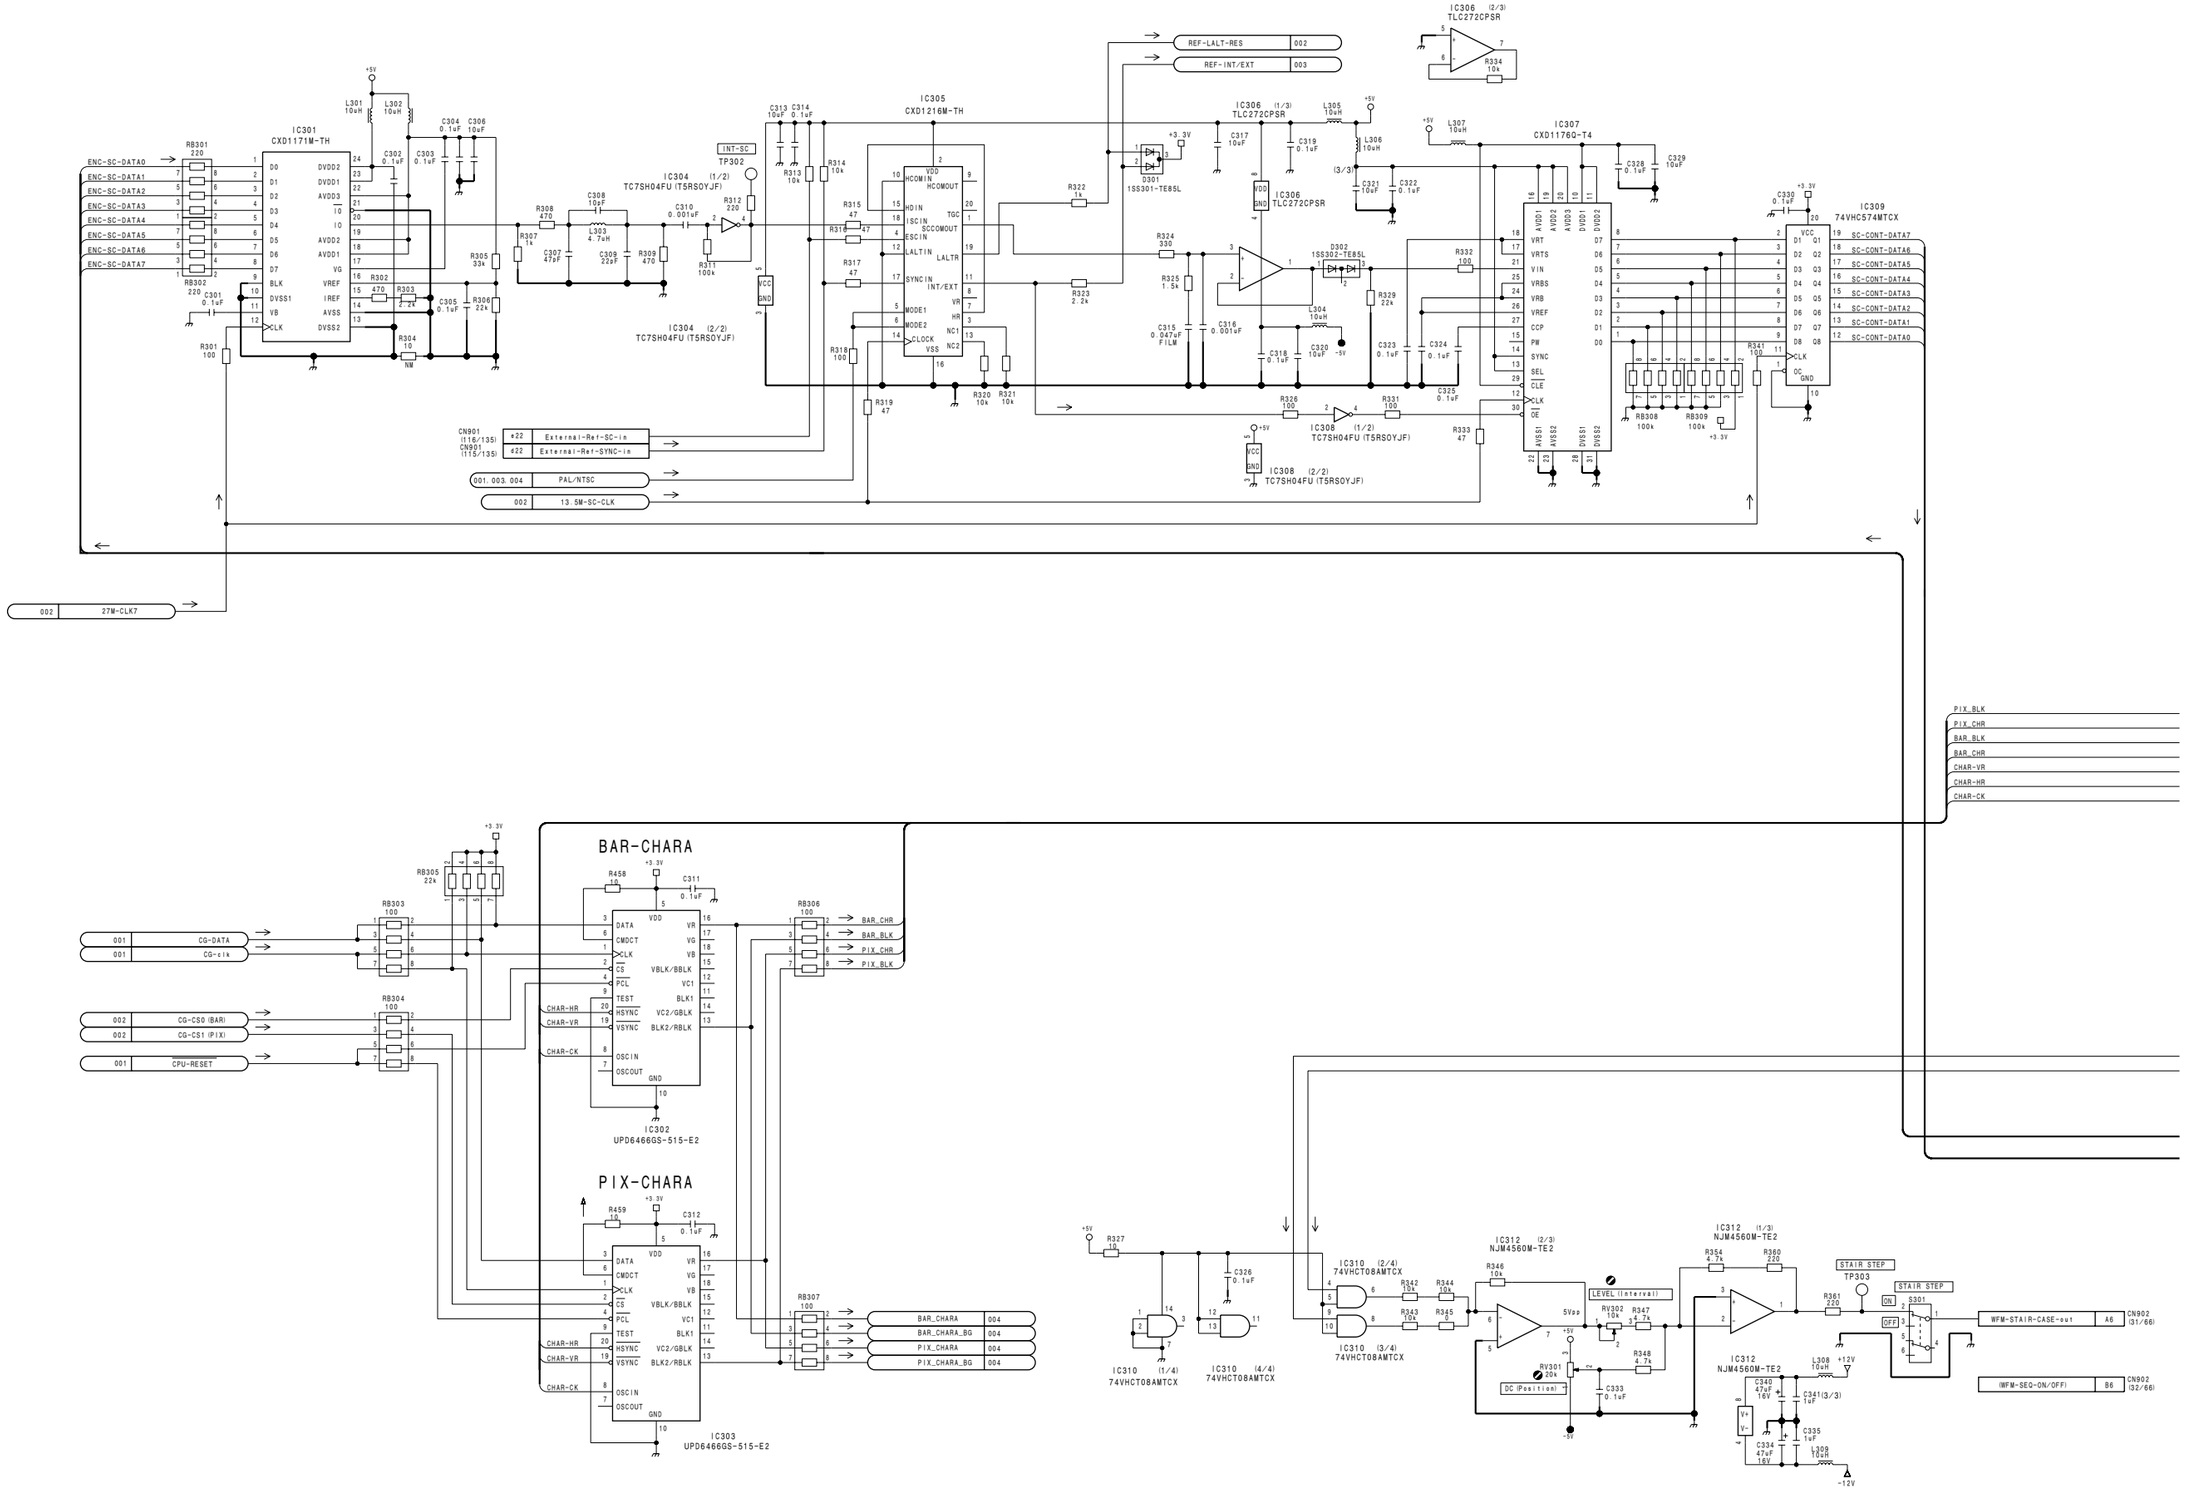

7-68

EN-159B (3/4)

Composite
-Encoder

100nSec-Slope
for SYNC out

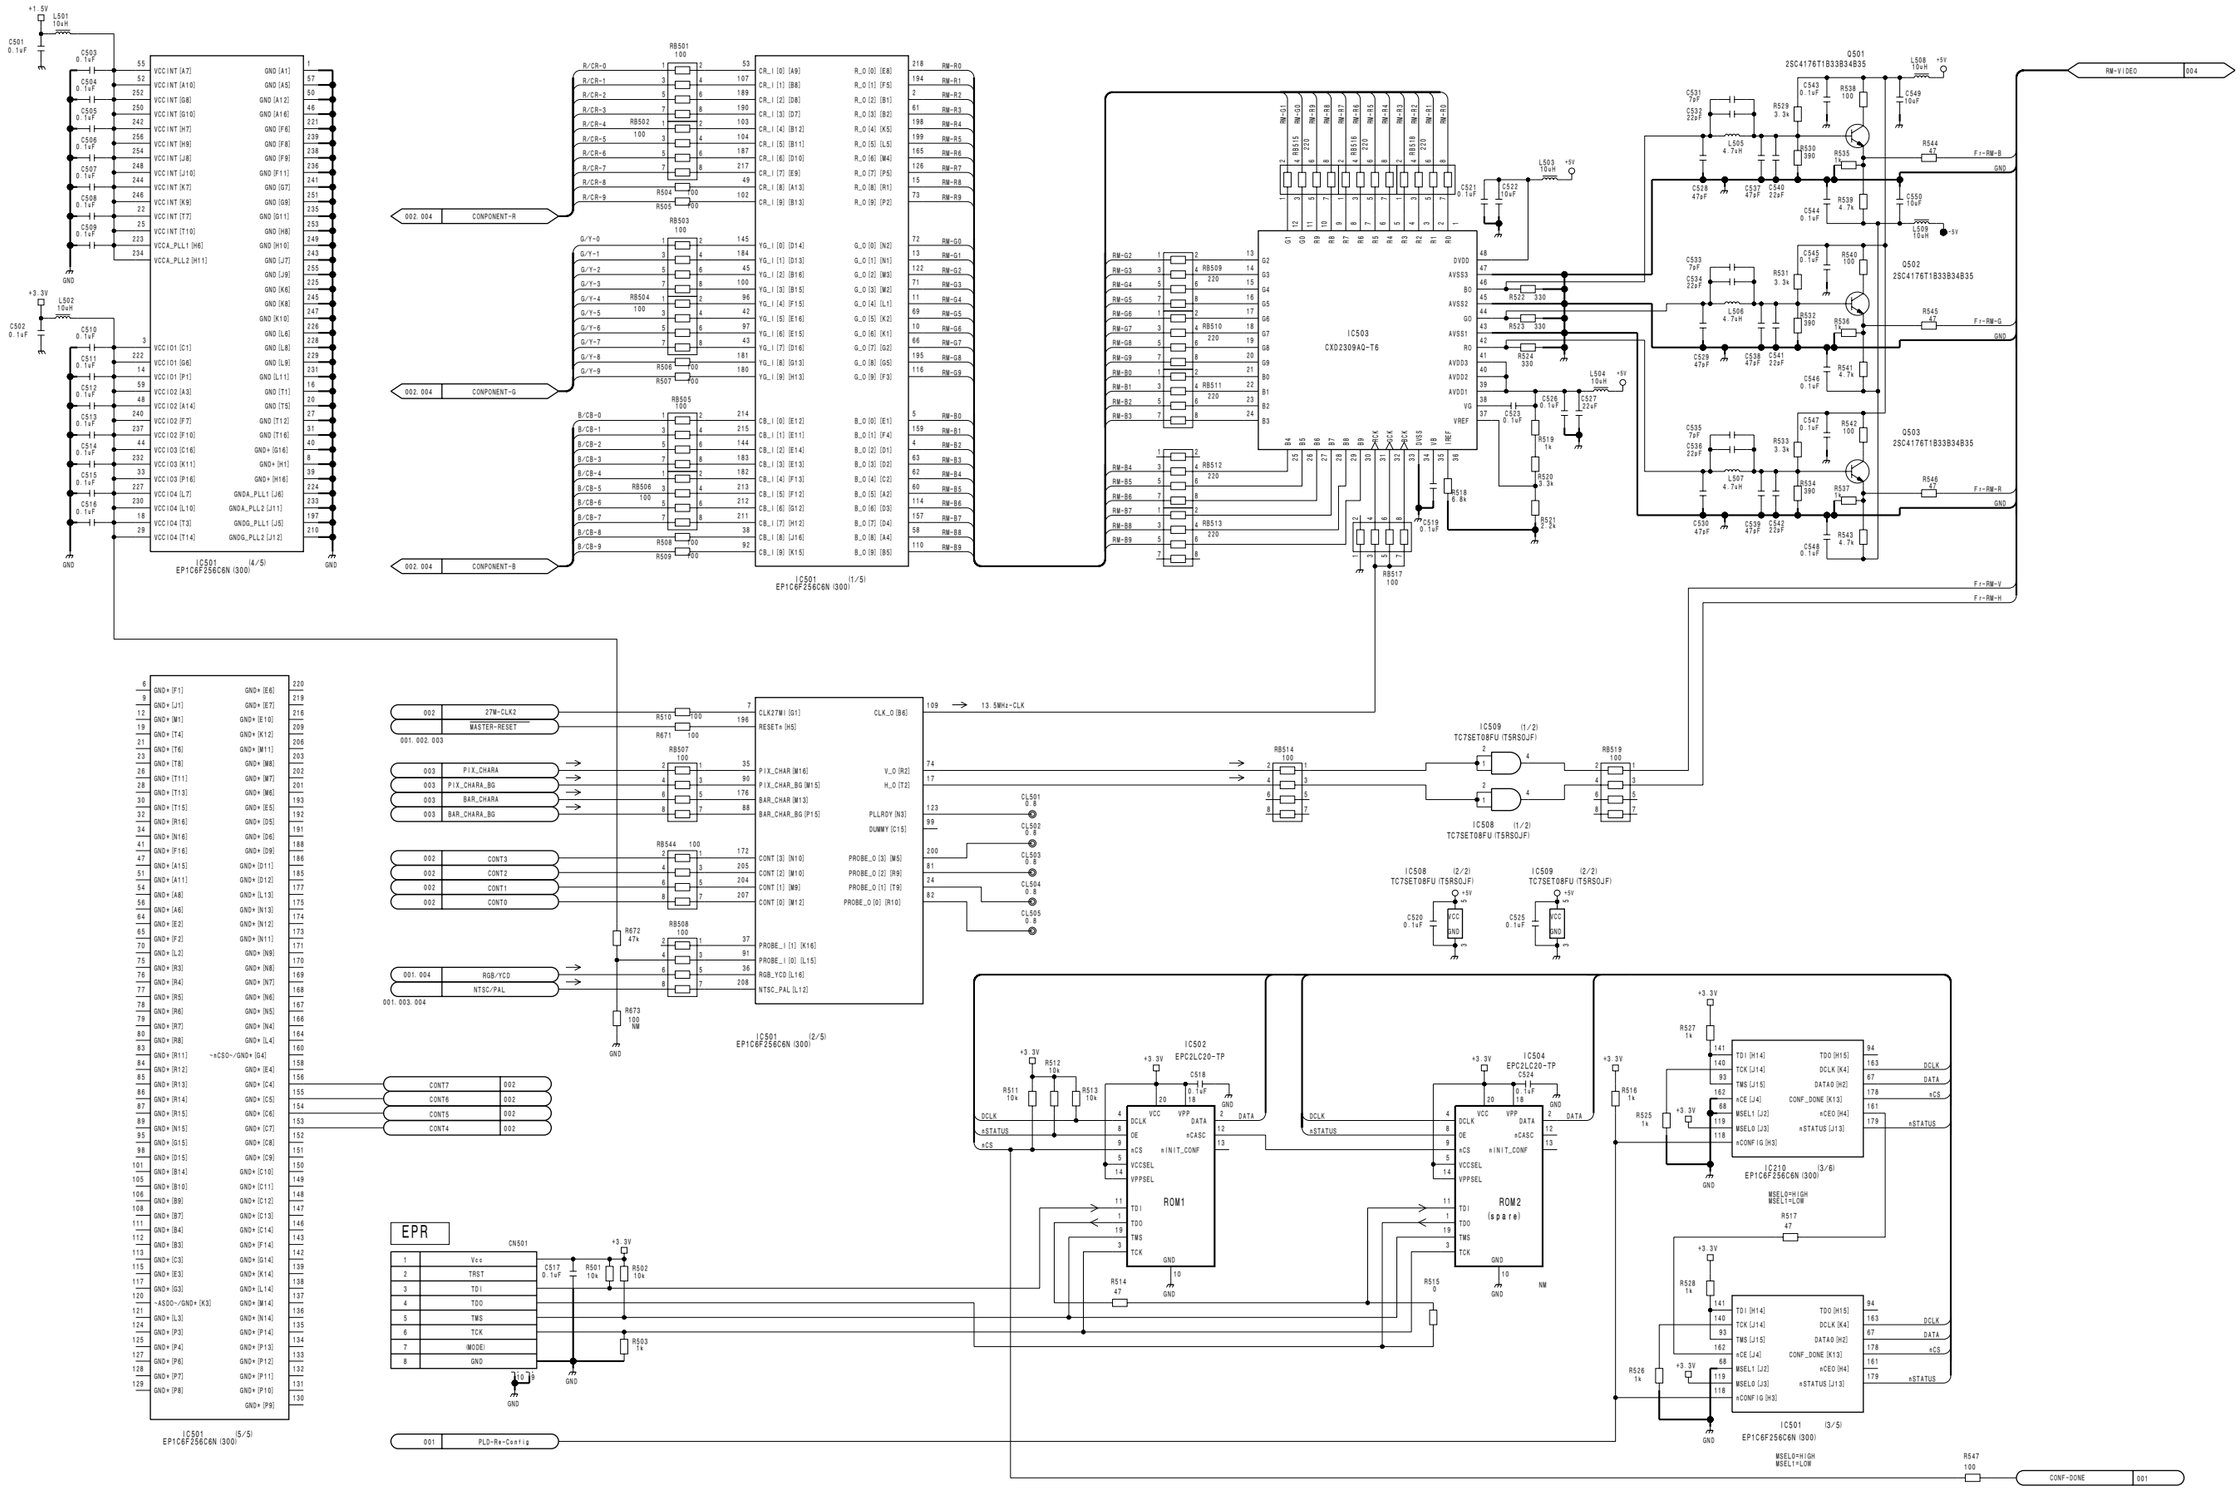
IC501 EP1C6F256C6N (300) (4/5)
IC501 EP1C6F256C6N (300) (1/5)
IC501 EP1C6F256C6N (300) (2/5)
IC501 EP1C6F256C6N (300) (5/5)
IC503 CXD2309AQ-T6
Q501 2SC4176T1B33B34B35
Q502 2SC4176T1B33B34B35
Q503 2SC4176T1B33B34B35
IC509 (1/2) TC7SET08FU (T5RSOJF)
IC508 (1/2) TC7SET08FU (T5RSOJF)
IC508 (2/2) TC7SET08FU (T5RSOJF)
IC509 (2/2) TC7SET08FU (T5RSOJF)
IC502 EPC2LC20-TP
IC504 EPC2LC20-TP
IC210 EP1C6F256C6N (300) (3/6)
IC501 EP1C6F256C6N (300) (3/5)
ROM1
ROM2 (spare)
EPR
CN501
002. 004 CONPONENT-R
002. 004 CONPONENT-G
002. 004 CONPONENT-B
RM-VIDEO 004
001. 002. 003 27M-CLK2 / MASTER-RESET
003 PIX_CHARA
003 PIX_CHARA_BG
003 BAR_CHARA
003 BAR_CHARA_BG
002 CONT3
002 CONT2
002 CONT1
002 CONT0
001. 004 RGB/YCD / NTSC/PAL
001. 003. 004
CONT7 002
CONT6 002
CONT5 002
CONT4 002
001 PLD-Rx-Config
CONF-DONE 001
13.5MHz-CLK
MSEL0=HIGH MSEL1=LOW
MSEL0=HIGH MSEL1=LOW

EN-159B (4/4)

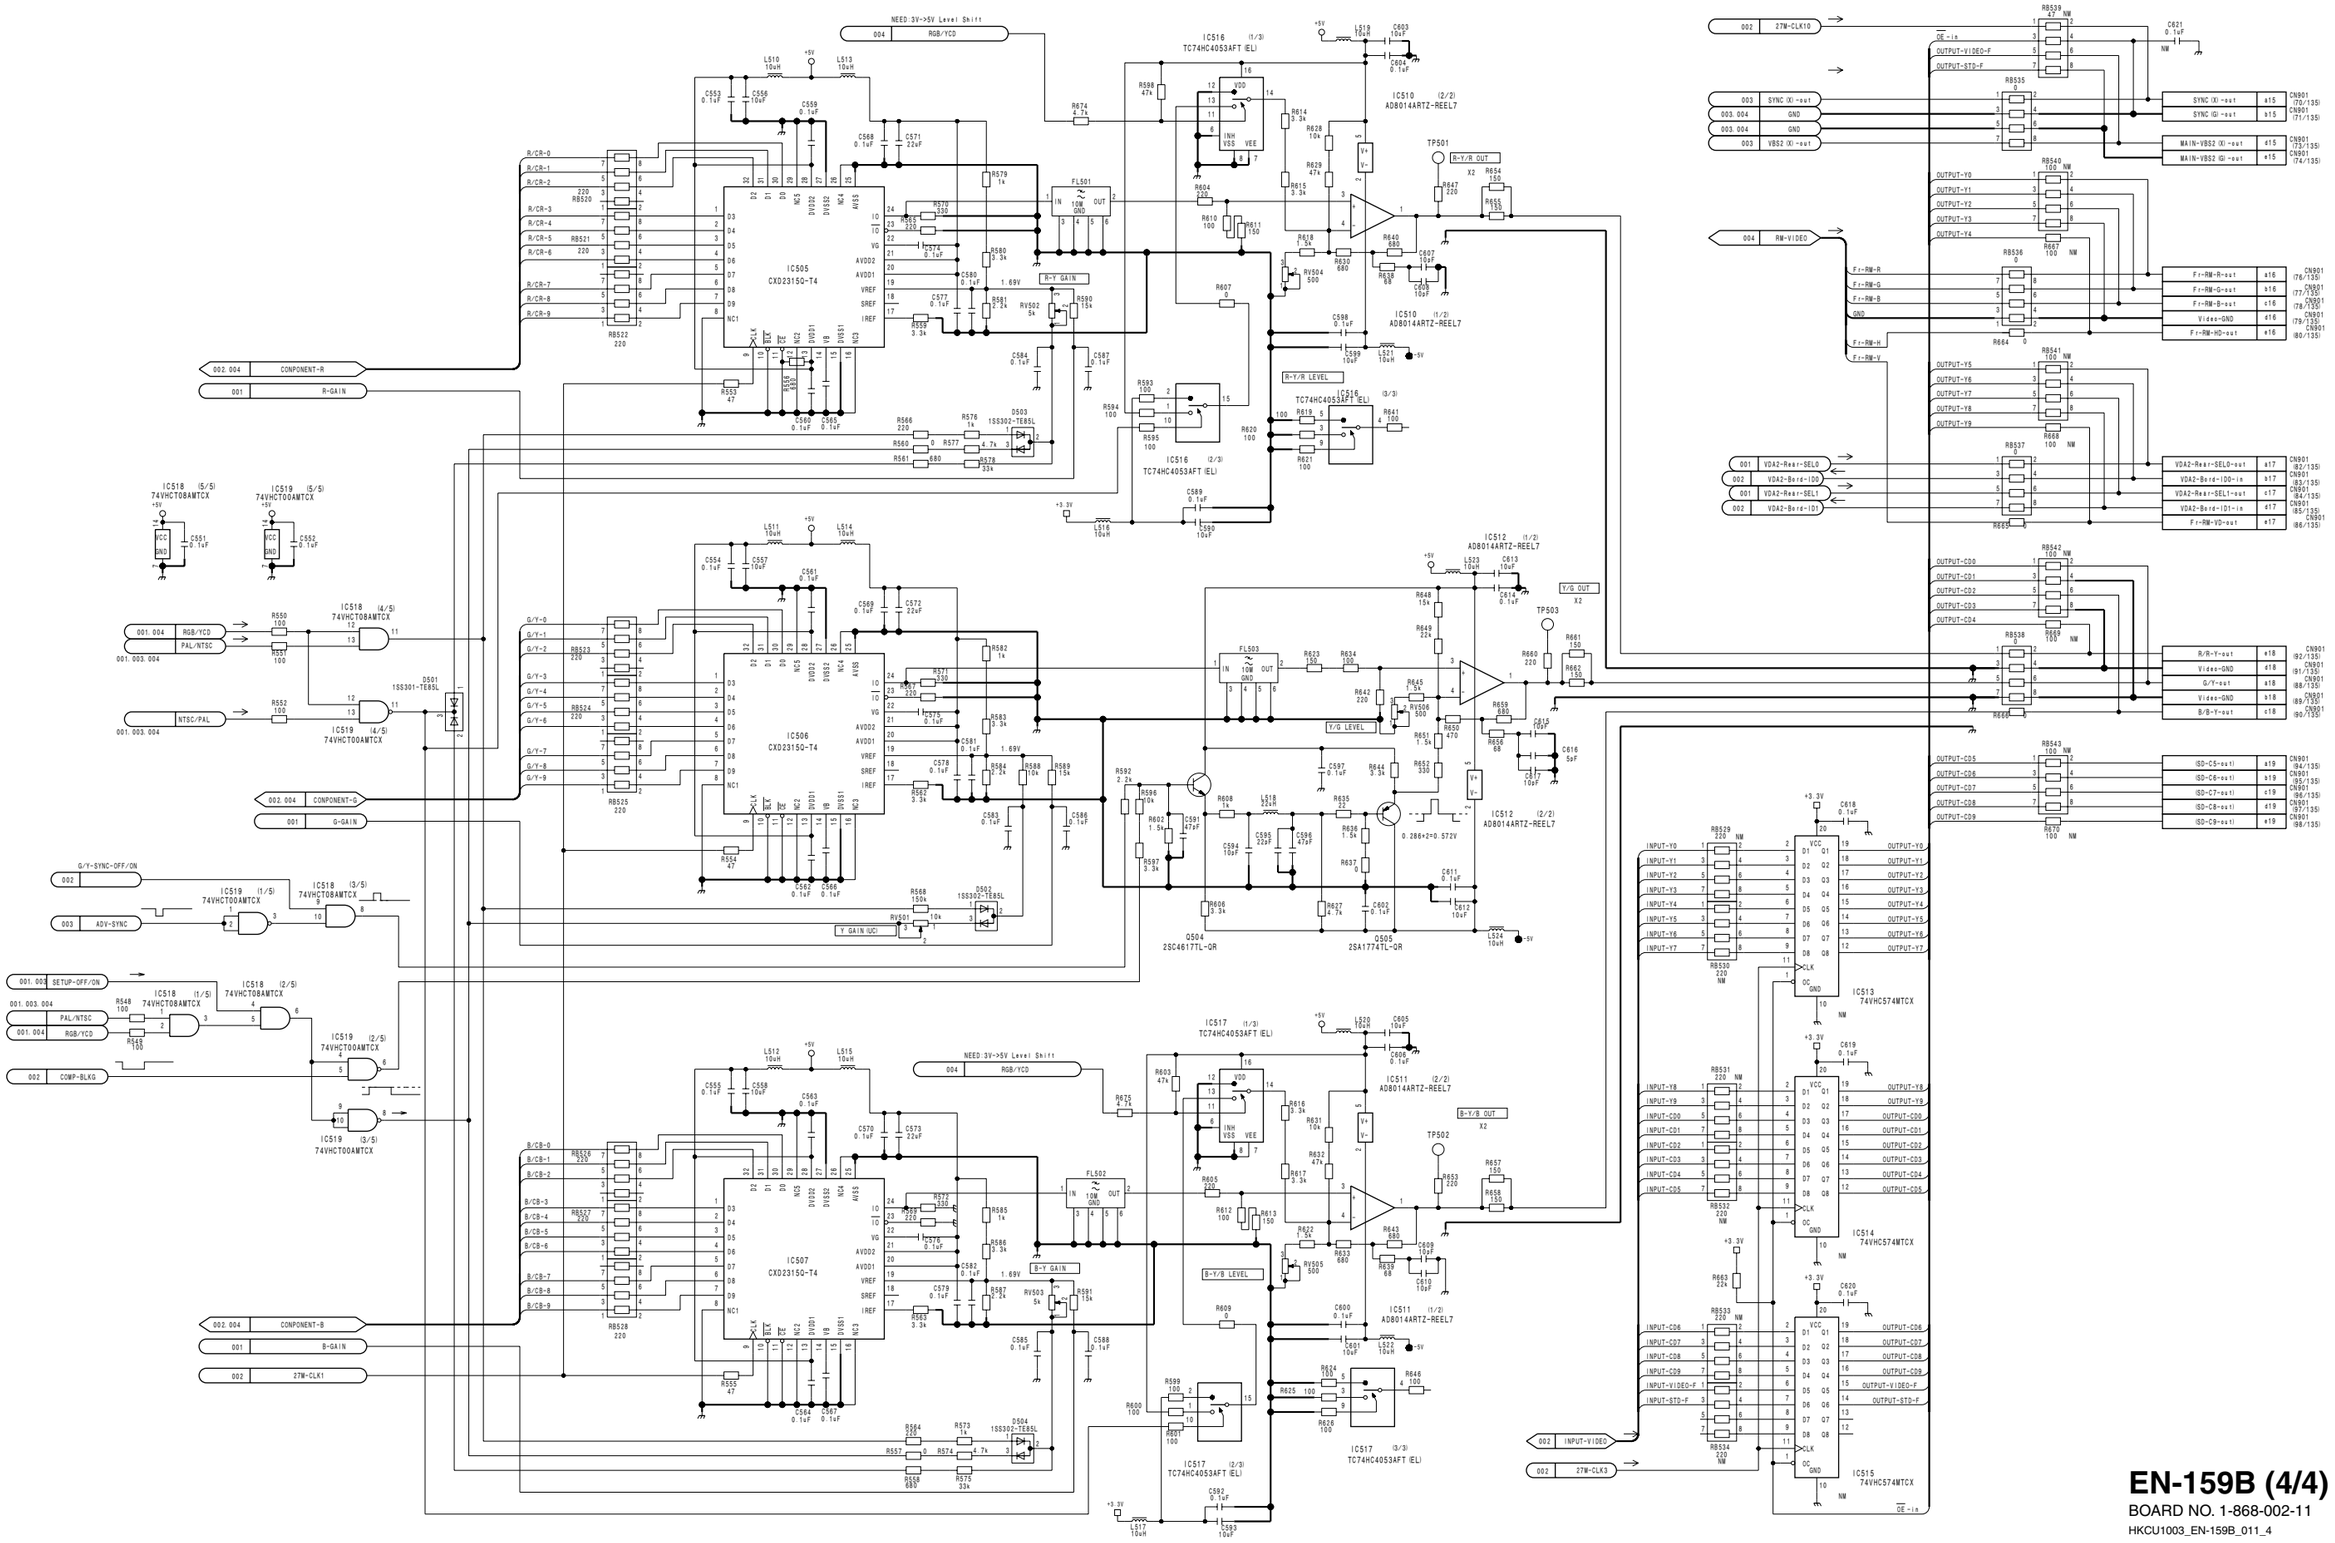

EN-159B (4/4)

BOARD NO. 1-868-002-11

HKCU1003_EN-159B_011_4

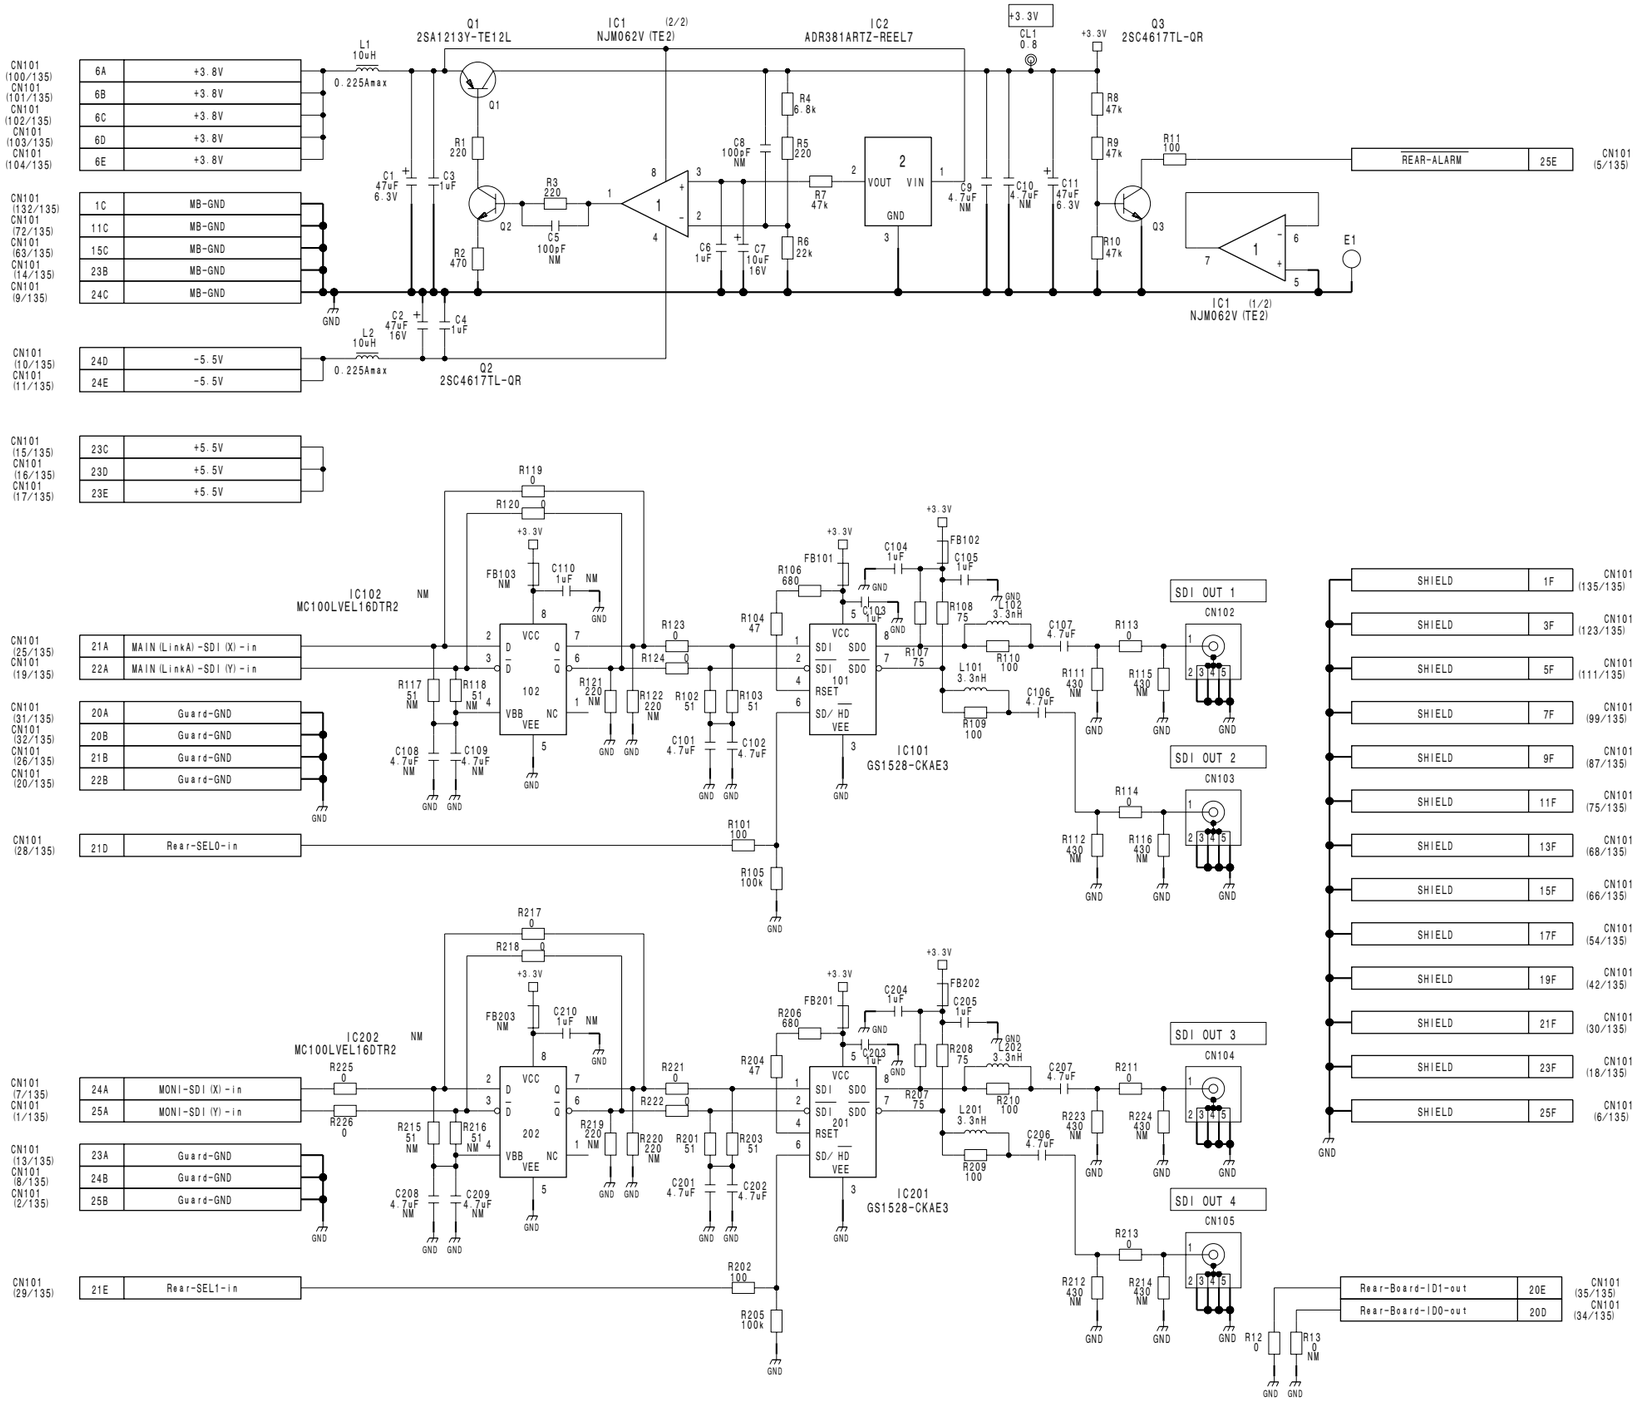

HIF-25
BOARD NO. 1-867-882-11, 31
HDCU1000_HIF-25_011_1

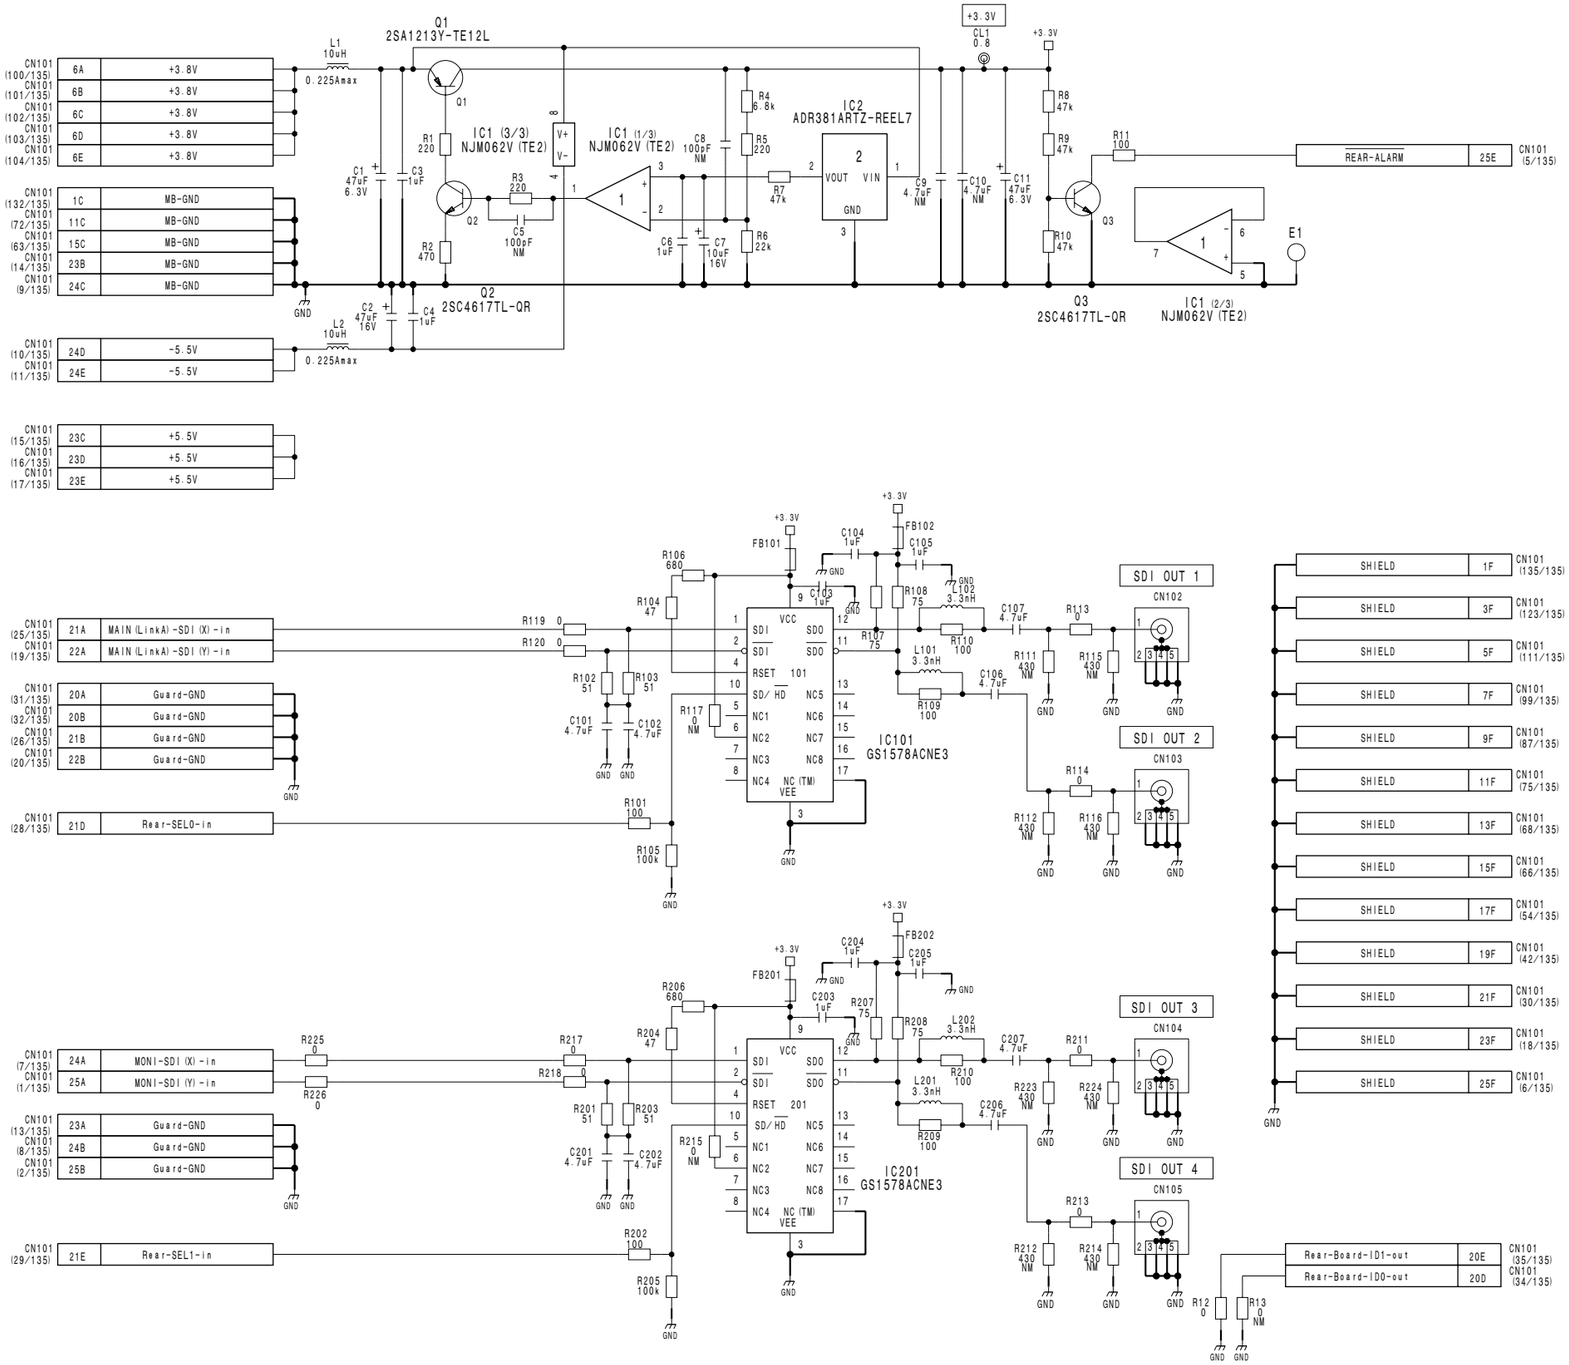

HIF-25
BOARD NO. 1-867-882-12, 32
HDCU1000_HIF-25_012_1

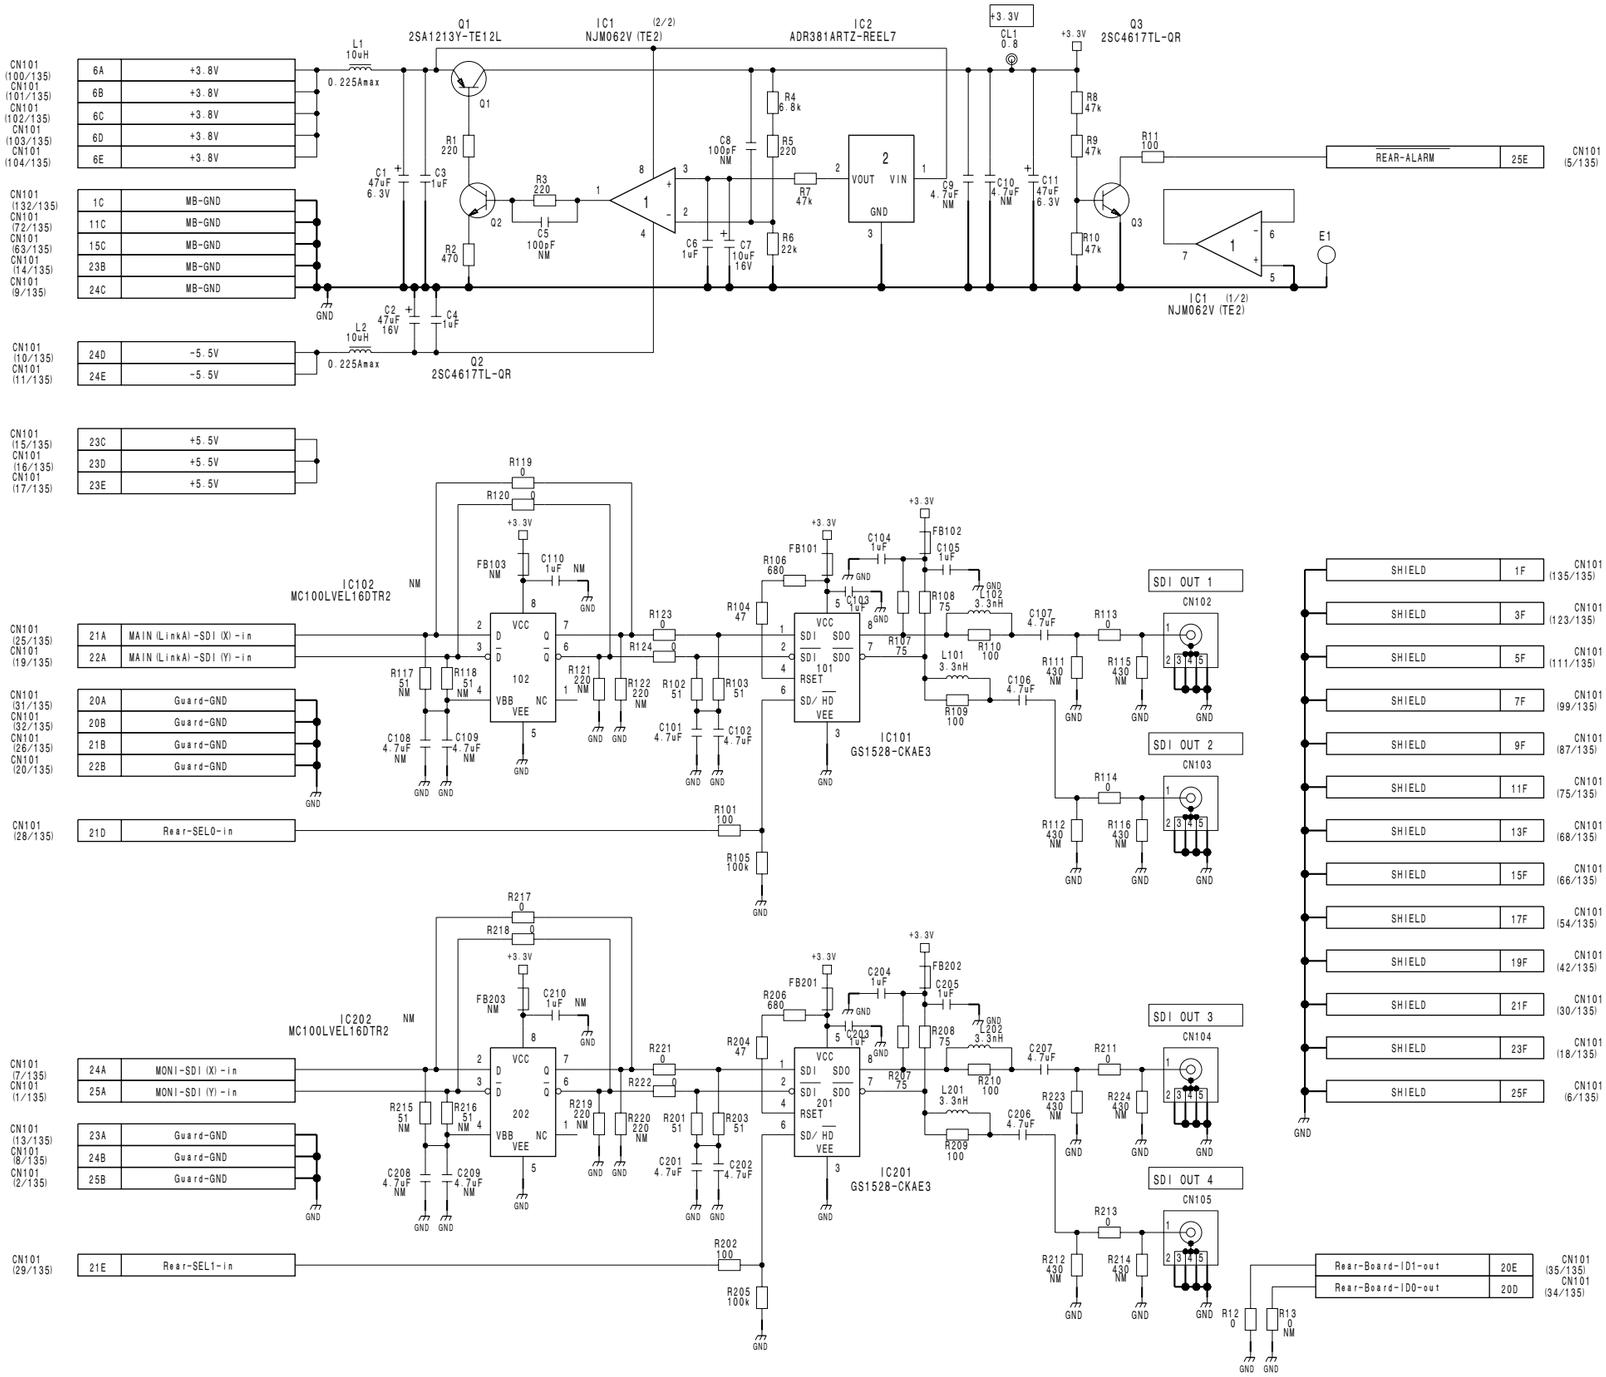

HIF-26
BOARD NO. 1-868-004-11
HKCU1005_HIF-26_011_1

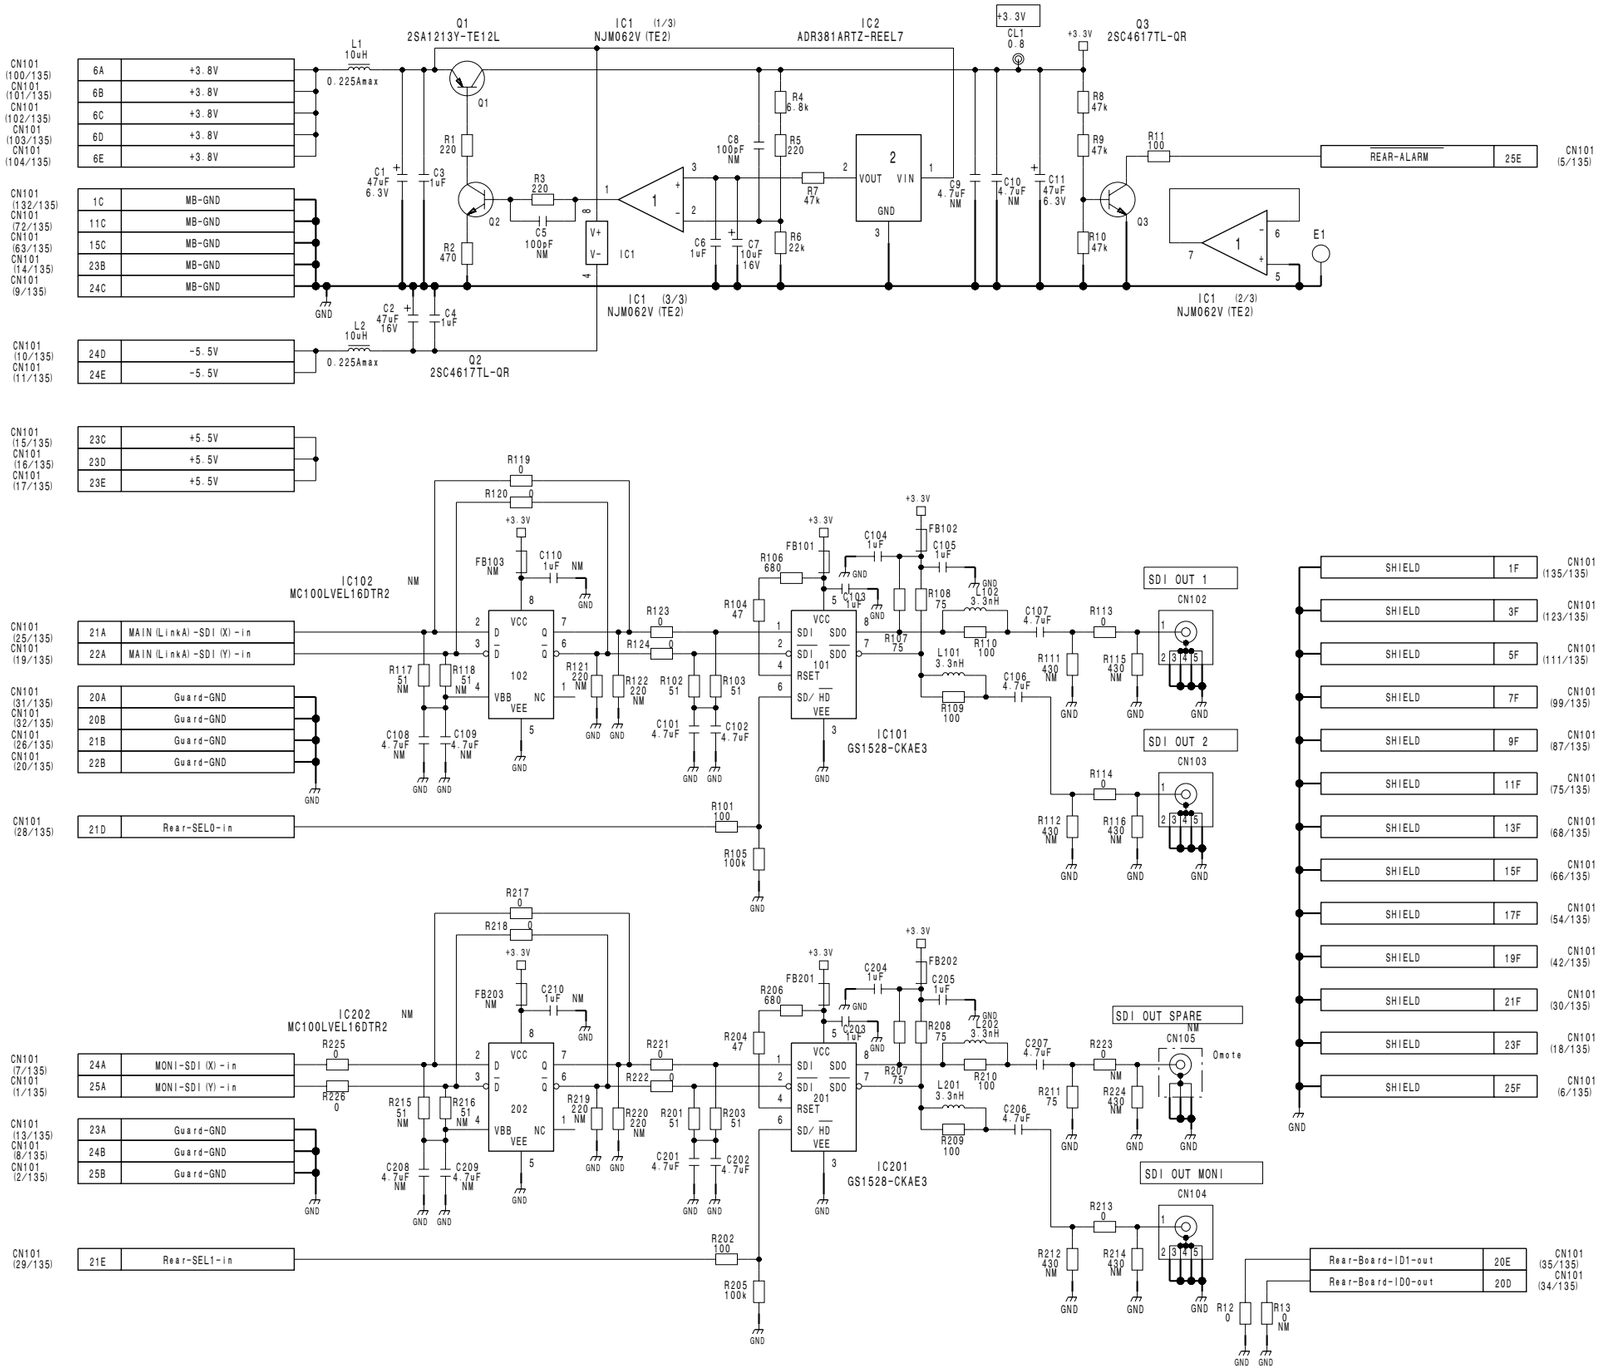
Q1 2SA1213Y-TE12L
IC1 (1/3) NJM062V (TE2)
IC2 ADR381ARTZ-REEL7
+3.3V
CL1 0.6
Q3 2SC4617TL-QR
L1 10uH
0.225Amax
L2 10uH
0.225Amax
Q2 2SC4617TL-QR
IC1 (3/3) NJM062V (TE2)
IC1 (2/3) NJM062V (TE2)
REAR-ALARM
E1
CN101 (100/135) CN101 (101/135) CN101 (102/135) CN101 (103/135) CN101 (104/135)
6A +3.8V
6B +3.8V
6C +3.8V
6D +3.8V
6E +3.8V
CN101 (132/135) CN101 (72/135) CN101 (63/135) CN101 (14/135) CN101 (9/135)
1C MB-GND
11C MB-GND
15C MB-GND
23B MB-GND
24C MB-GND
CN101 (10/135) CN101 (11/135)
24D -5.5V
24E -5.5V
CN101 (15/135) CN101 (16/135) CN101 (17/135)
23C +5.5V
23D +5.5V
23E +5.5V
IC102 MC100LVEL16DTR2
IC101 GS1528-CKAE3
IC202 MC100LVEL16DTR2
IC201 GS1528-CKAE3
SDI OUT 1
SDI OUT 2
SDI OUT SPARE
SDI OUT MONI
CN102
CN103
CN105
CN104
Omote
CN101 (25/135) CN101 (19/135)
21A MAIN (LinkA) -SDI (X) -in
22A MAIN (LinkA) -SDI (Y) -in
CN101 (31/135) CN101 (32/135) CN101 (26/135) CN101 (20/135)
20A Guard-GND
20B Guard-GND
21B Guard-GND
22B Guard-GND
CN101 (28/135)
21D Rear-SEL0-in
CN101 (7/135) CN101 (1/135)
24A MONI-SDI (X) -in
25A MONI-SDI (Y) -in
CN101 (13/135) CN101 (8/135) CN101 (2/135)
23A Guard-GND
24B Guard-GND
25B Guard-GND
CN101 (29/135)
21E Rear-SEL1-in
SHIELD 1F CN101 (135/135)
SHIELD 3F CN101 (123/135)
SHIELD 5F CN101 (111/135)
SHIELD 7F CN101 (99/135)
SHIELD 9F CN101 (87/135)
SHIELD 11F CN101 (75/135)
SHIELD 13F CN101 (68/135)
SHIELD 15F CN101 (66/135)
SHIELD 17F CN101 (54/135)
SHIELD 19F CN101 (42/135)
SHIELD 21F CN101 (30/135)
SHIELD 23F CN101 (18/135)
SHIELD 25F CN101 (6/135)
Rear-Board-ID1-out 20E CN101 (35/135)
Rear-Board-ID0-out 20D CN101 (34/135)
SDT-74M-CLK-out 15A CN101 (61/135)
OE -in 15B CN101 (62/135)
SKIN-Gate-out 15D CN101 (64/135)
SDTD-HD/SD-F-out 15E CN101 (65/135)
HD-LinkA-Y0-out 16A CN101 (55/135)
HD-LinkA-Y1-out 16B CN101 (56/135)
HD-LinkA-Y2-out 16C CN101 (57/135)
HD-LinkA-Y3-out 16D CN101 (58/135)
HD-LinkA-Y4-out 16E CN101 (59/135)
HD-LinkA-Y5-out 17A CN101 (49/135)
HD-LinkA-Y6-out 17B CN101 (50/135)
HD-LinkA-Y7-out 17C CN101 (51/135)
HD-LinkA-Y8-out 17D CN101 (52/135)
HD-LinkA-Y9-out 17E CN101 (53/135)
HD-LinkA-C0-out 18A CN101 (43/135)
HD-LinkA-C1-out 18B CN101 (44/135)
HD-LinkA-C2-out 18C CN101 (45/135)
HD-LinkA-C3-out 18D CN101 (46/135)
HD-LinkA-C4-out 18E CN101 (47/135)
HD-LinkA-C5-out 19A CN101 (37/135)
HD-LinkA-C6-out 19B CN101 (38/135)
HD-LinkA-C7-out 19C CN101 (39/135)
HD-LinkA-C8-out 19D CN101 (40/135)
HD-LinkA-C9-out 19E CN101 (41/135)
RM-PIX-S (G) -out 20C CN101 (33/135)
RM-PIX-S (X) -out 21C CN101 (27/135)
CCU-Ref-F-in 22C CN101 (21/135)
External-Ref-SYNC-in 22D CN101 (22/135)
External-Ref-SC-in 22E CN101 (23/135)
nc 25C CN101 (3/135)
nc 25D CN101 (4/135)
CHU-74M-CLK-in 1A CN101 (130/135)
OE -out 1B CN101 (131/135)
CCD-F-acm-in 1D CN101 (133/135)
CHU-LinkA-F-in 1E CN101 (134/135)
CHU-LinkA-Y0-in 2A CN101 (124/135)
CHU-LinkA-Y1-in 2B CN101 (125/135)
CHU-LinkA-Y2-in 2C CN101 (126/135)
CHU-LinkA-Y3-in 2D CN101 (127/135)
CHU-LinkA-Y4-in 2E CN101 (128/135)
CHU-LinkA-Y5-in 3A CN101 (118/135)
CHU-LinkA-Y6-in 3B CN101 (119/135)
CHU-LinkA-Y7-in 3C CN101 (120/135)
CHU-LinkA-Y8-in 3D CN101 (121/135)
CHU-LinkA-Y9-in 3E CN101 (122/135)
CHU-LinkA-C0-in 4A CN101 (112/135)
CHU-LinkA-C1-in 4B CN101 (113/135)
CHU-LinkA-C2-in 4C CN101 (114/135)
CHU-LinkA-C3-in 4D CN101 (115/135)
CHU-LinkA-C4-in 4E CN101 (116/135)
CHU-LinkA-C5-in 5A CN101 (106/135)
CHU-LinkA-C6-in 5B CN101 (107/135)
CHU-LinkA-C7-in 5C CN101 (108/135)
CHU-LinkA-C8-in 5D CN101 (109/135)
CHU-LinkA-C9-in 5E CN101 (110/135)
7A CN101 (94/135)
7B CN101 (95/135)
7C CN101 (96/135)
7D CN101 (97/135)
7E CN101 (98/135)
8A CN101 (88/135)
8B CN101 (89/135)
8C CN101 (90/135)
8D CN101 (91/135)
8E CN101 (92/135)
9A CN101 (82/135)
9B CN101 (83/135)
9C CN101 (84/135)
9D CN101 (85/135)
9E CN101 (86/135)
10A CN101 (76/135)
10B CN101 (77/135)
10C CN101 (78/135)
10D CN101 (79/135)
10E CN101 (80/135)
MST-74M-CLK-B-in 11A CN101 (70/135)
OE -out 11B CN101 (71/135)
MST-HD-H-B-in 11D CN101 (73/135)
MST-HD-F-B-in 11E CN101 (74/135)
144 1F CN101 (129/135)
132 2F CN101 (117/135)
120 4F CN101 (105/135)
108 5F CN101 (93/135)
96 7F CN101 (81/135)
84 8F CN101 (69/135)
72 10F CN101 (67/135)
60 11F CN101 (60/135)
48 13F CN101 (48/135)
36 14F CN101 (36/135)
24 16F CN101 (24/135)
12 17F CN101 (12/135)

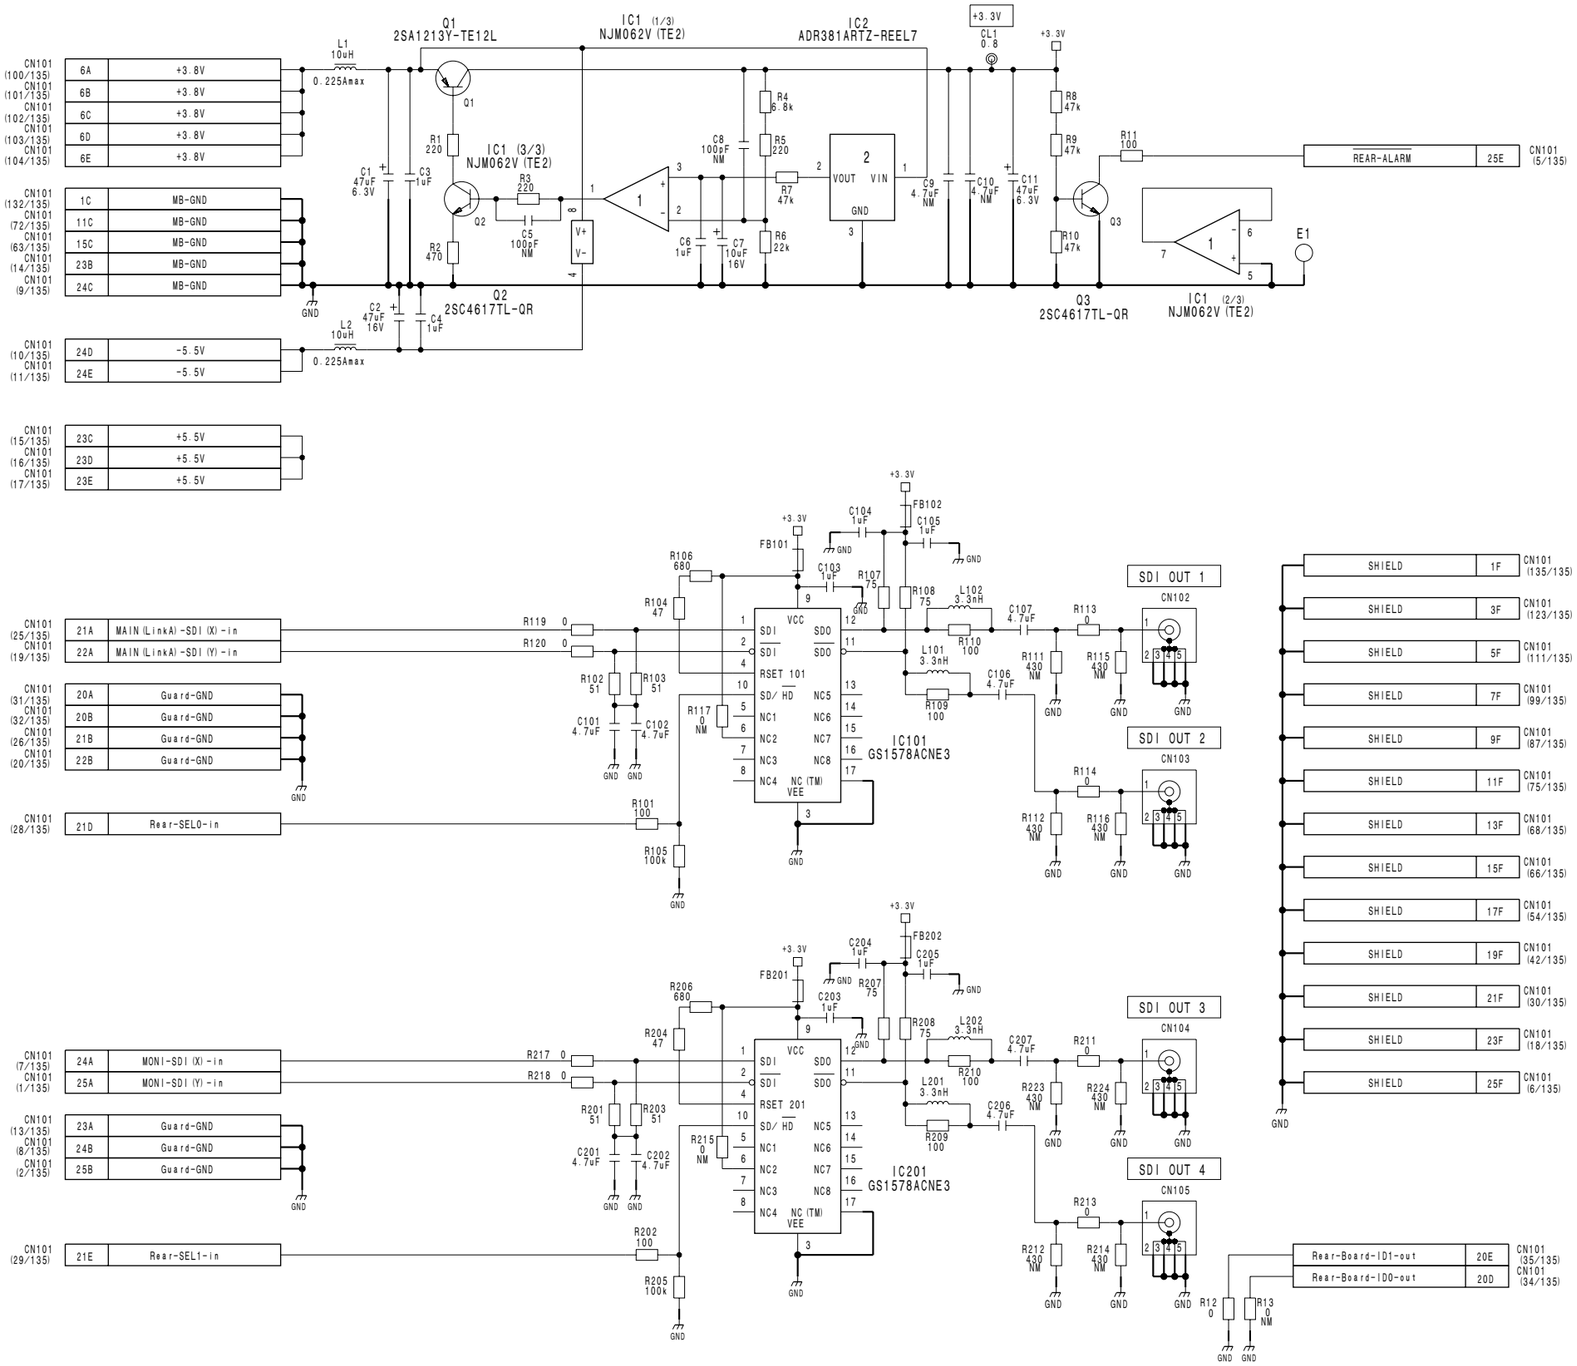

SHIELD	1F	CN101 (135/135)
SHIELD	3F	CN101 (123/135)
SHIELD	5F	CN101 (111/135)
SHIELD	7F	CN101 (99/135)
SHIELD	9F	CN101 (87/135)
SHIELD	11F	CN101 (75/135)
SHIELD	13F	CN101 (68/135)
SHIELD	15F	CN101 (66/135)
SHIELD	17F	CN101 (54/135)
SHIELD	19F	CN101 (42/135)
SHIELD	21F	CN101 (30/135)
SHIELD	23F	CN101 (18/135)
SHIELD	25F	CN101 (6/135)

Rear-Board-ID1-out	20E	CN101 (35/135)
Rear-Board-ID0-out	20D	CN101 (34/135)

SDT-74M-CLK-out	15A	CN101 (61/135)
OE -in	15B	CN101 (62/135)
SKIN-Gate-out	15D	CN101 (64/135)
SDTD-HD/SD-F-out	15E	CN101 (65/135)
HD-LinkA-Y0-out	16A	CN101 (55/135)
HD-LinkA-Y1-out	16B	CN101 (56/135)
HD-LinkA-Y2-out	16C	CN101 (57/135)
HD-LinkA-Y3-out	16D	CN101 (58/135)
HD-LinkA-Y4-out	16E	CN101 (59/135)
HD-LinkA-Y5-out	17A	CN101 (49/135)
HD-LinkA-Y6-out	17B	CN101 (50/135)
HD-LinkA-Y7-out	17C	CN101 (51/135)
HD-LinkA-Y8-out	17D	CN101 (52/135)
HD-LinkA-Y9-out	17E	CN101 (53/135)
HD-LinkA-C0-out	18A	CN101 (43/135)
HD-LinkA-C1-out	18B	CN101 (44/135)
HD-LinkA-C2-out	18C	CN101 (45/135)
HD-LinkA-C3-out	18D	CN101 (46/135)
HD-LinkA-C4-out	18E	CN101 (47/135)
HD-LinkA-C5-out	19A	CN101 (37/135)
HD-LinkA-C6-out	19B	CN101 (38/135)
HD-LinkA-C7-out	19C	CN101 (39/135)
HD-LinkA-C8-out	19D	CN101 (40/135)
HD-LinkA-C9-out	19E	CN101 (41/135)
RM-PIX-S (G) -out	20C	CN101 (33/135)
RM-PIX-S (X) -out	21C	CN101 (27/135)
CCU-Ref-F-in	22C	CN101 (21/135)
External-Ref-SYNC-in	22D	CN101 (22/135)
External-Ref-SC-in	22E	CN101 (23/135)
nc	25C	CN101 (3/135)
nc	25D	CN101 (4/135)

144	2F	CN101 (129/135)
132	4F	CN101 (117/135)
120	6F	CN101 (105/135)
108	8F	CN101 (93/135)
96	10F	CN101 (81/135)
84	12F	CN101 (69/135)
72	14F	CN101 (67/135)
60	16F	CN101 (60/135)
48	18F	CN101 (48/135)
36	20F	CN101 (36/135)
24	22F	CN101 (24/135)
12	24F	CN101 (12/135)

CHU-74M-CLK-in	1A	CN101 (130/135)
OE -out	1B	CN101 (131/135)
CCD-F-acm-in	1D	CN101 (133/135)
CHU-LinkA-F-in	1E	CN101 (134/135)
CHU-LinkA-Y0-in	2A	CN101 (124/135)
CHU-LinkA-Y1-in	2B	CN101 (125/135)
CHU-LinkA-Y2-in	2C	CN101 (126/135)
CHU-LinkA-Y3-in	2D	CN101 (127/135)
CHU-LinkA-Y4-in	2E	CN101 (128/135)
CHU-LinkA-Y5-in	3A	CN101 (118/135)
CHU-LinkA-Y6-in	3B	CN101 (119/135)
CHU-LinkA-Y7-in	3C	CN101 (120/135)
CHU-LinkA-Y8-in	3D	CN101 (121/135)
CHU-LinkA-Y9-in	3E	CN101 (122/135)
CHU-LinkA-C0-in	4A	CN101 (112/135)
CHU-LinkA-C1-in	4B	CN101 (113/135)
CHU-LinkA-C2-in	4C	CN101 (114/135)
CHU-LinkA-C3-in	4D	CN101 (115/135)
CHU-LinkA-C4-in	4E	CN101 (116/135)
CHU-LinkA-C5-in	5A	CN101 (106/135)
CHU-LinkA-C6-in	5B	CN101 (107/135)
CHU-LinkA-C7-in	5C	CN101 (108/135)
CHU-LinkA-C8-in	5D	CN101 (109/135)
CHU-LinkA-C9-in	5E	CN101 (110/135)
	7A	CN101 (94/135)
	7B	CN101 (95/135)
	7C	CN101 (96/135)
	7D	CN101 (97/135)
	7E	CN101 (98/135)
	8A	CN101 (82/135)
	8B	CN101 (83/135)
	8C	CN101 (84/135)
	8D	CN101 (85/135)
	8E	CN101 (86/135)
	9A	CN101 (76/135)
	9B	CN101 (77/135)
	9C	CN101 (78/135)
	9D	CN101 (79/135)
	9E	CN101 (80/135)
MST-74M-CLK-B-in	11A	CN101 (70/135)
OE -out	11B	CN101 (71/135)
MST-HD-H-B-in	11D	CN101 (73/135)
MST-HD-F-B-in	11E	CN101 (74/135)

HIF-26
BOARD NO. 1-868-004-12
HDCU1000_HIF-26_012_1

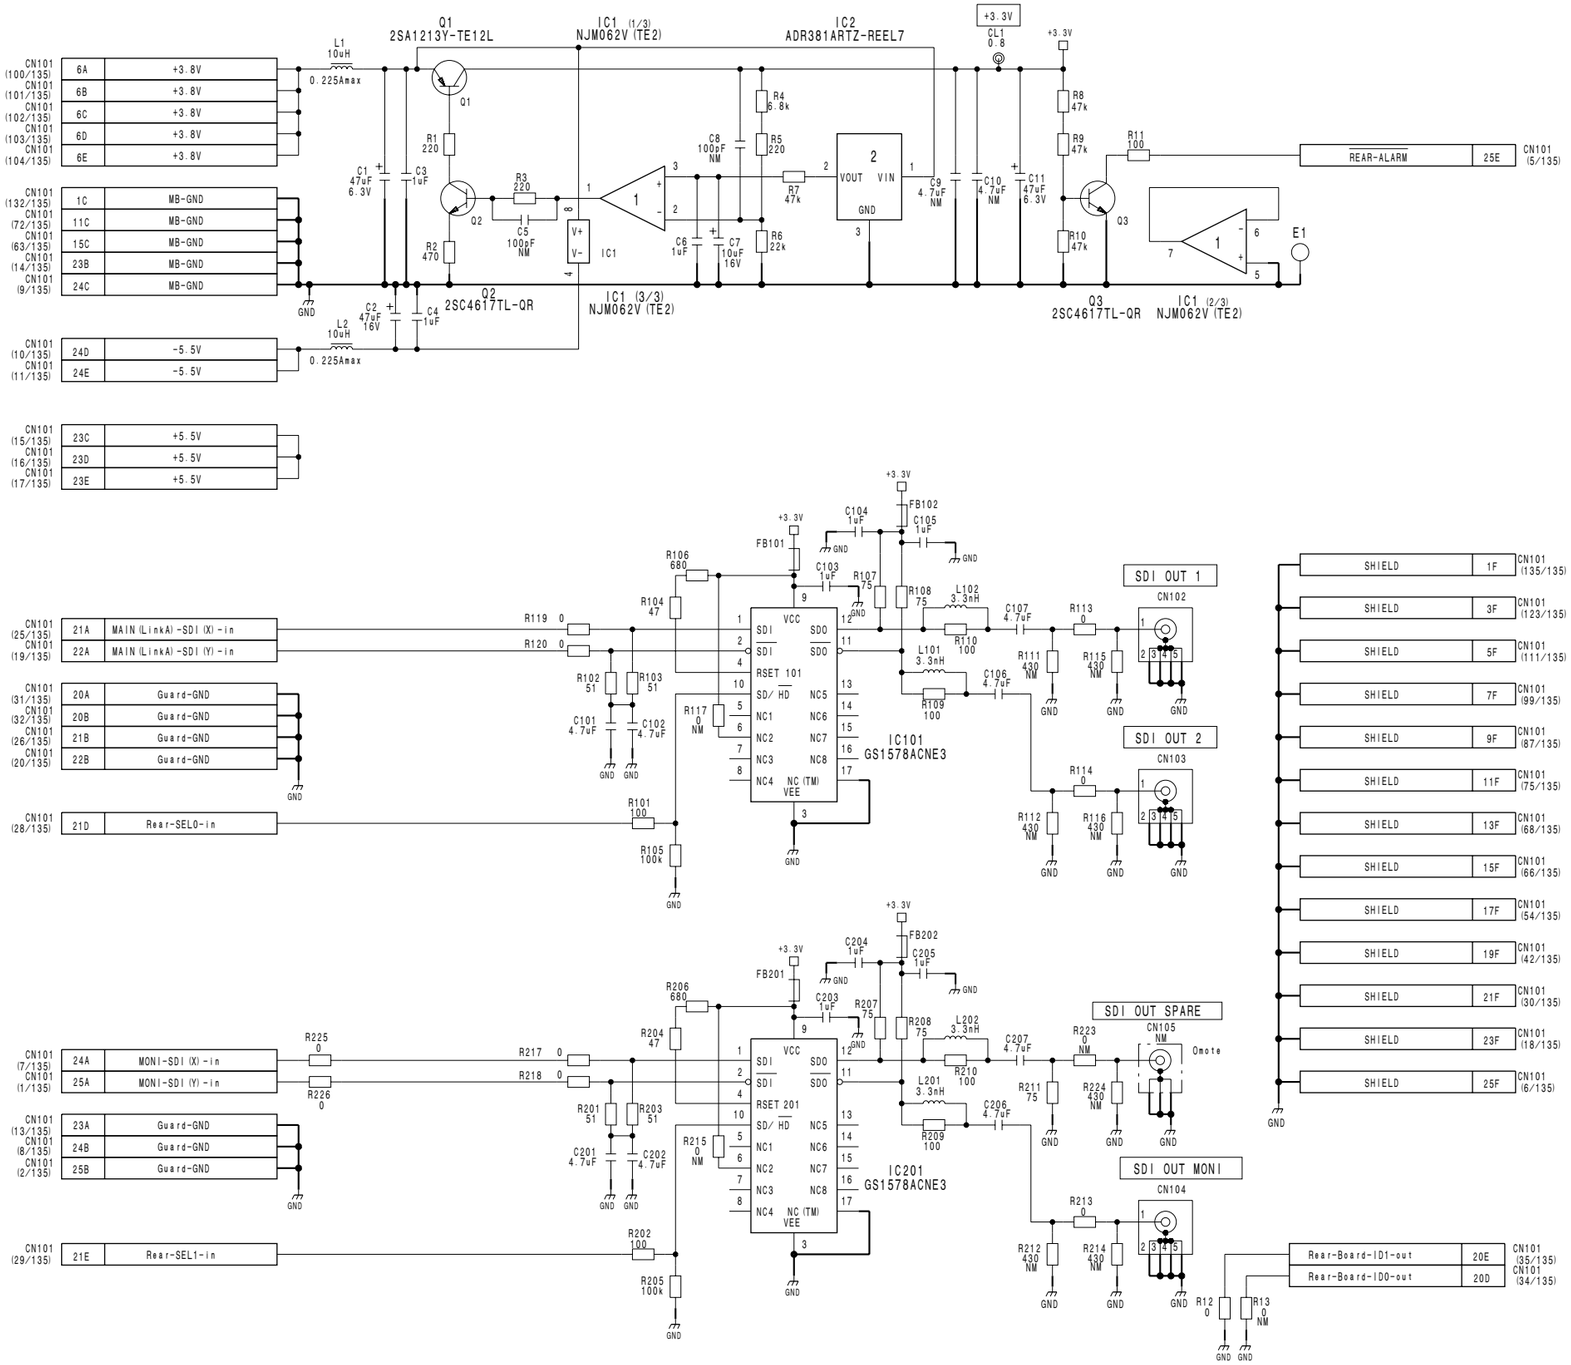

HIF-27
BOARD NO. 1-867-893-12, 32
HDCU1500_HIF-27_012_1

MB-1071 (1/3), MB-1071A (1/3)
SUFFIX: -11, -31 **SUFFIX: -41**

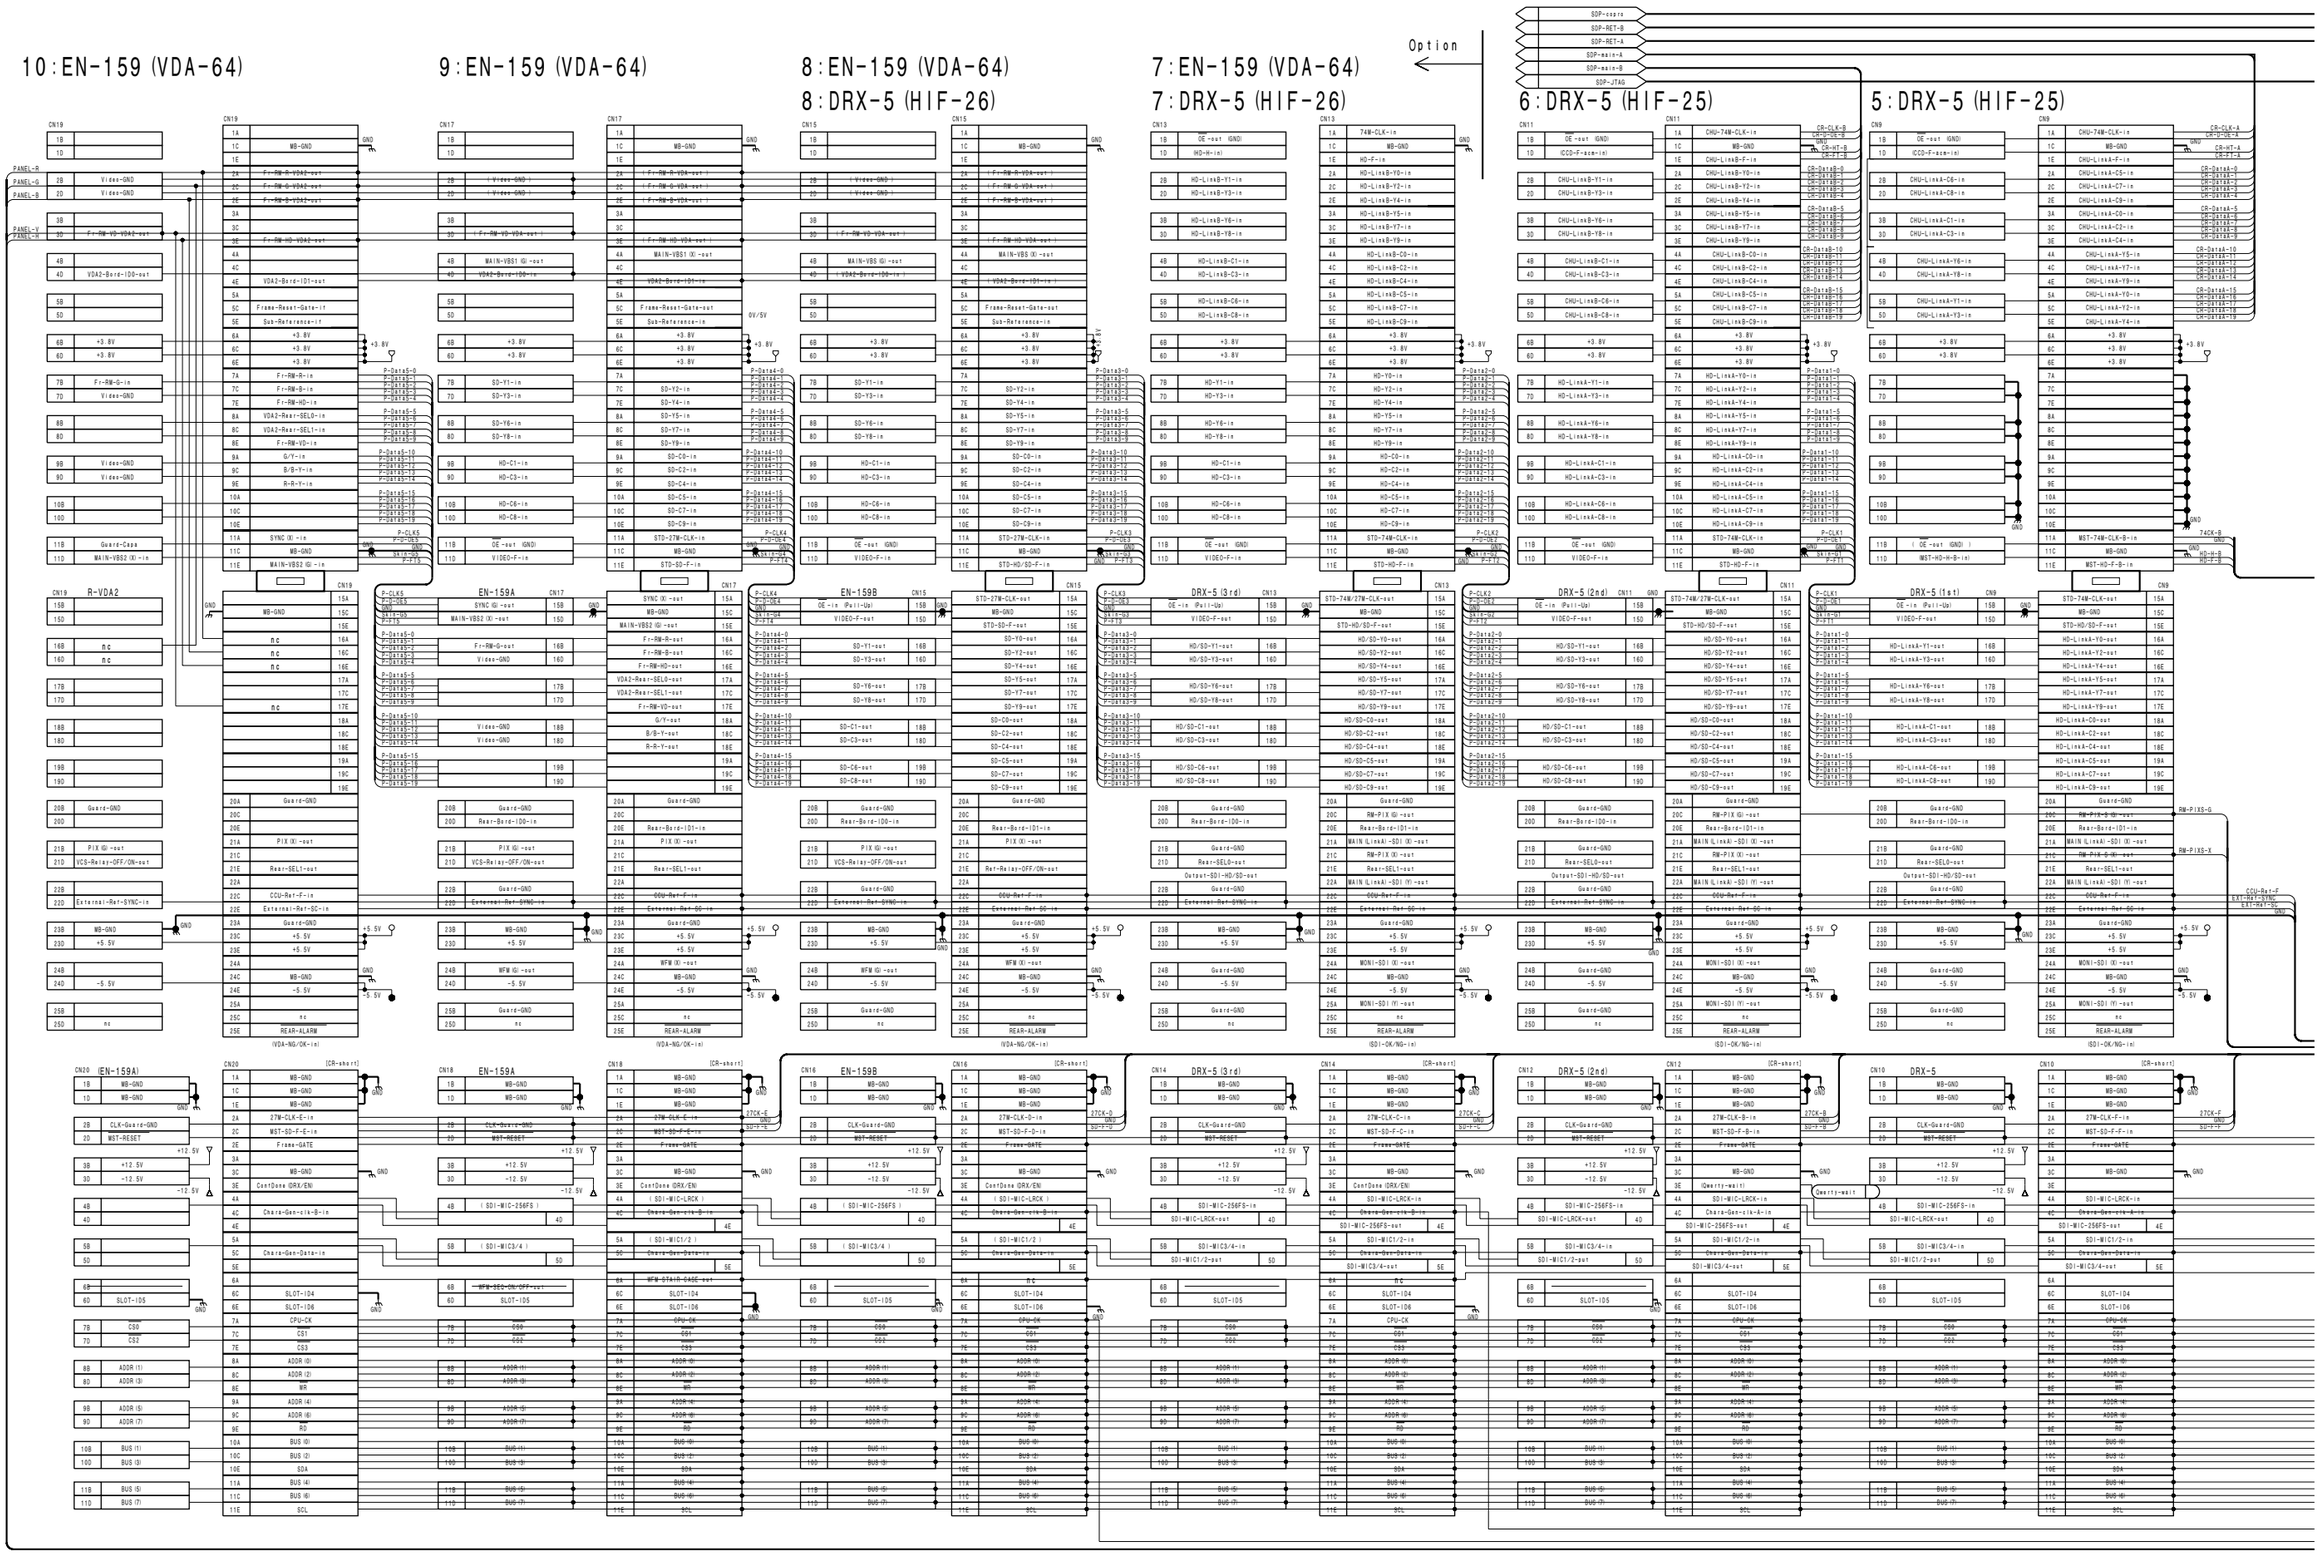

MB-1071 (1/3), MB-1071A (1/3)
SUFFIX: -11, -31 SUFFIX: -41

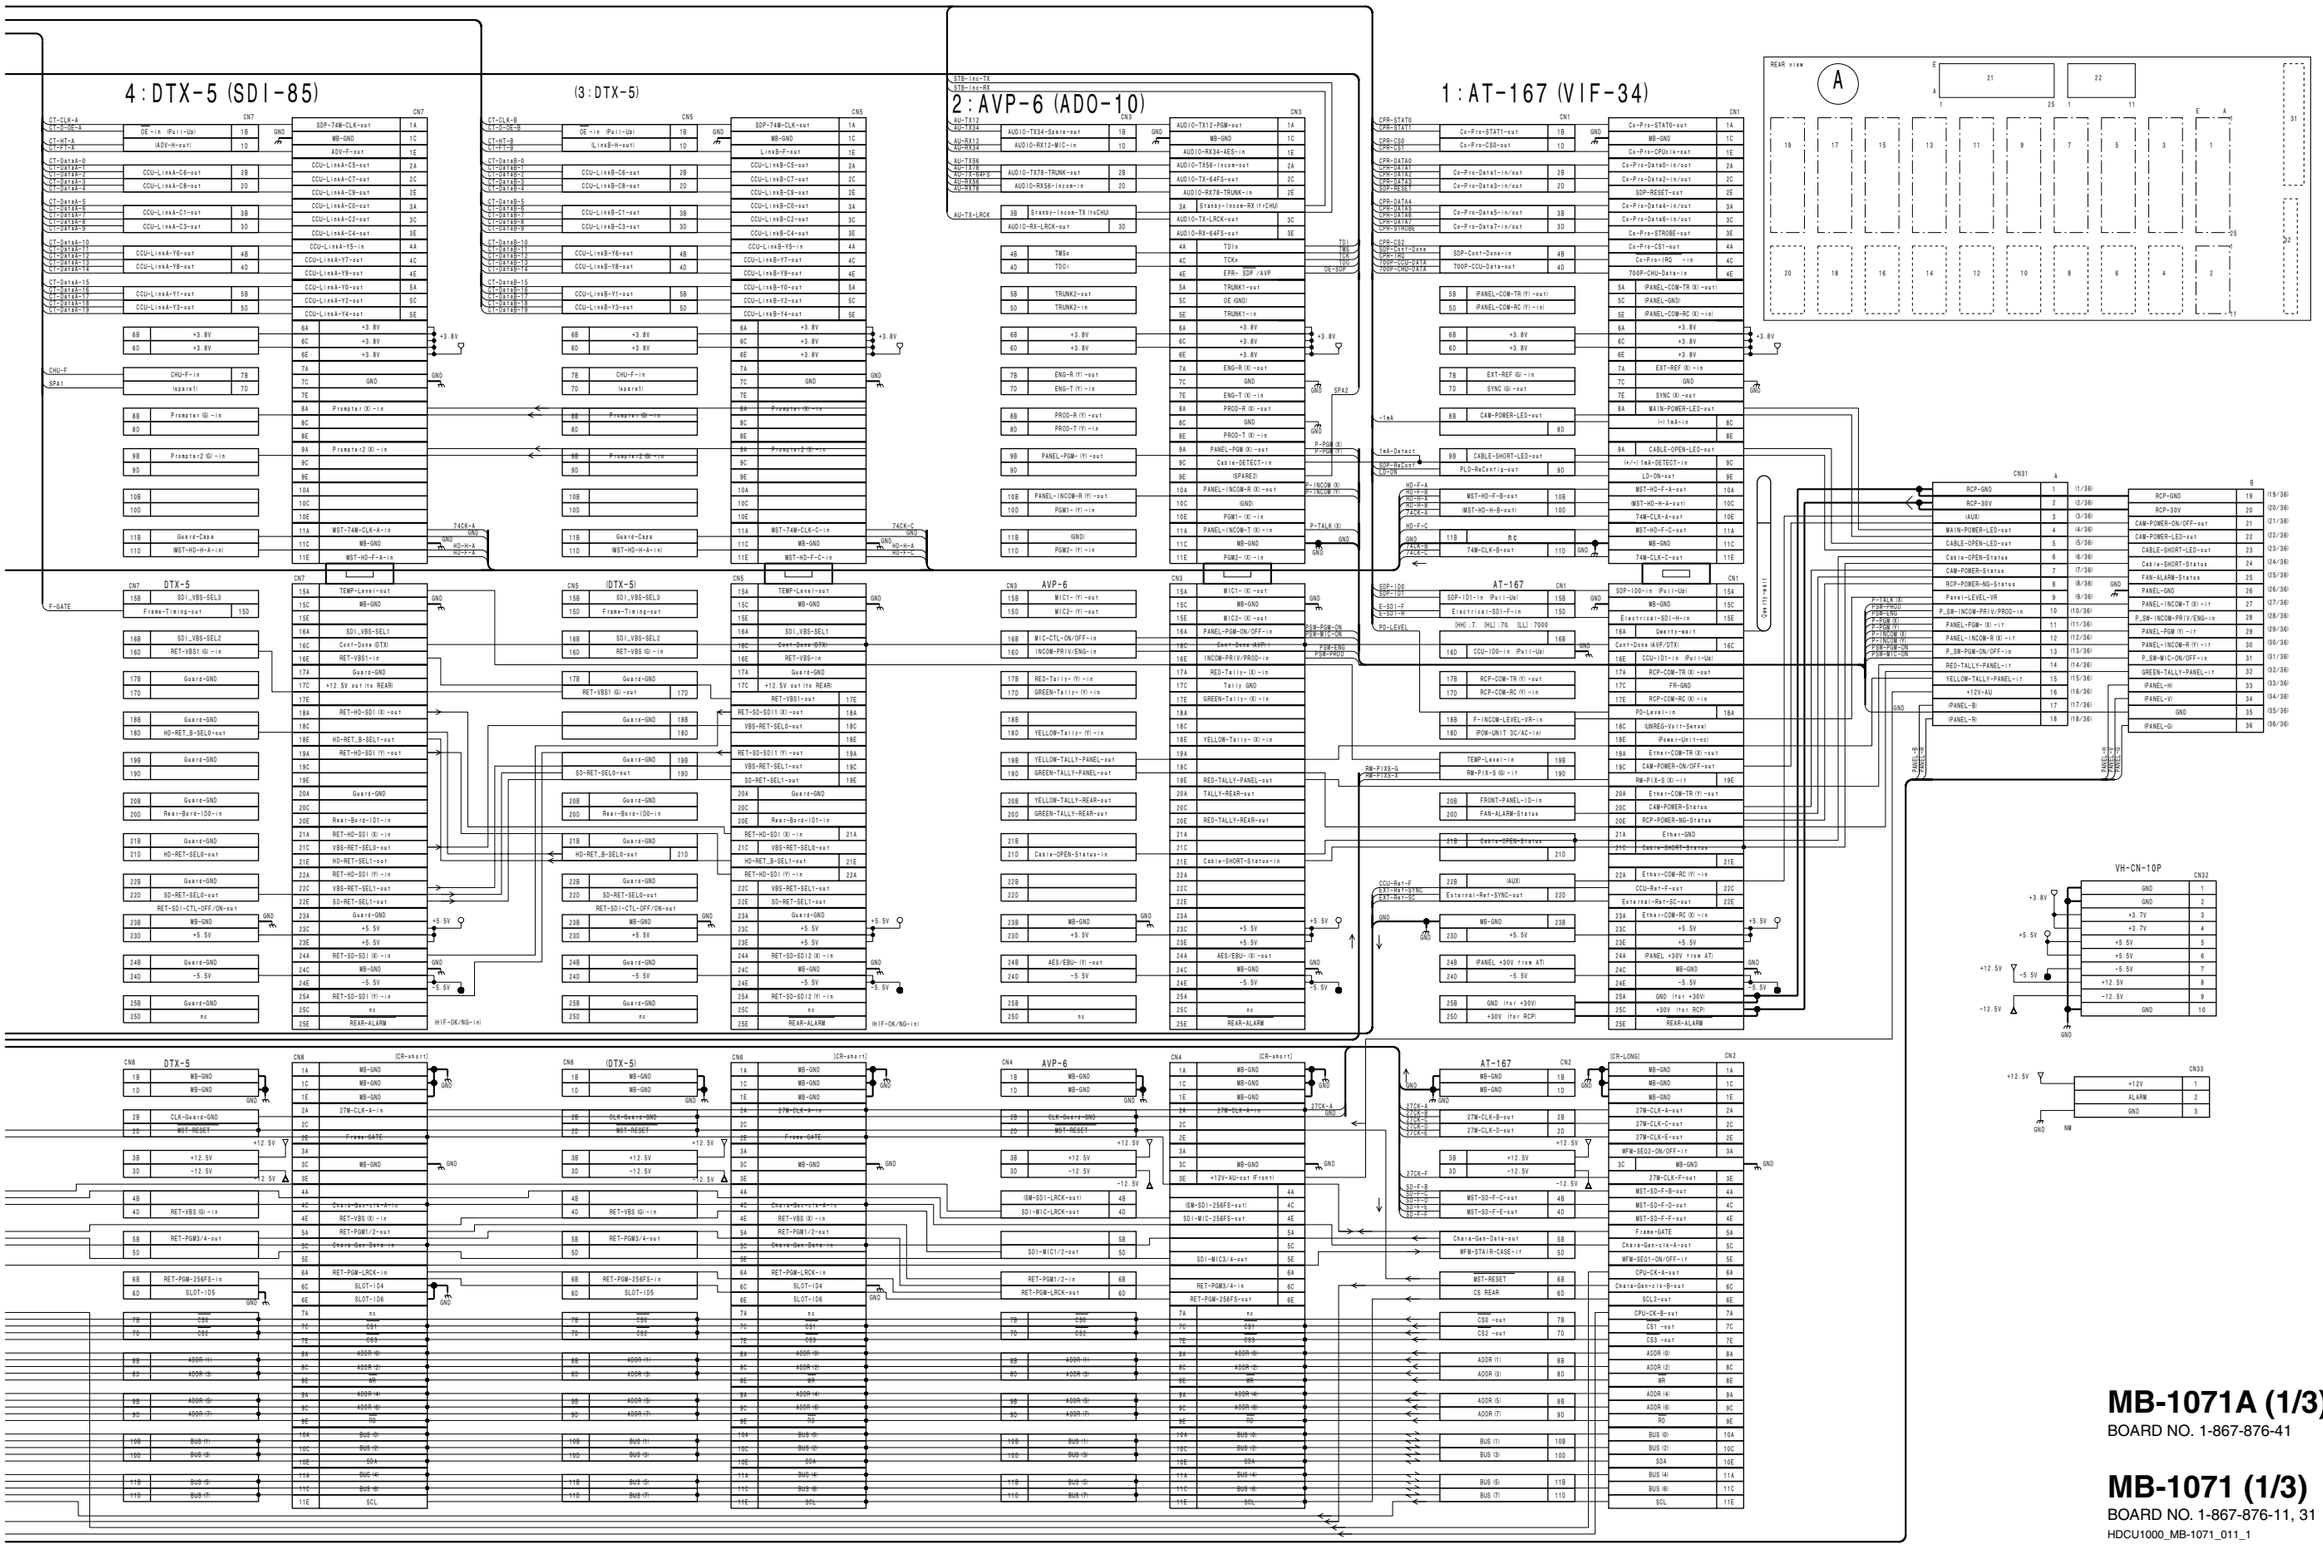

MB-1071 (2/3), MB-1071A (2/3)
SUFFIX: -11, -31 SUFFIX: -41

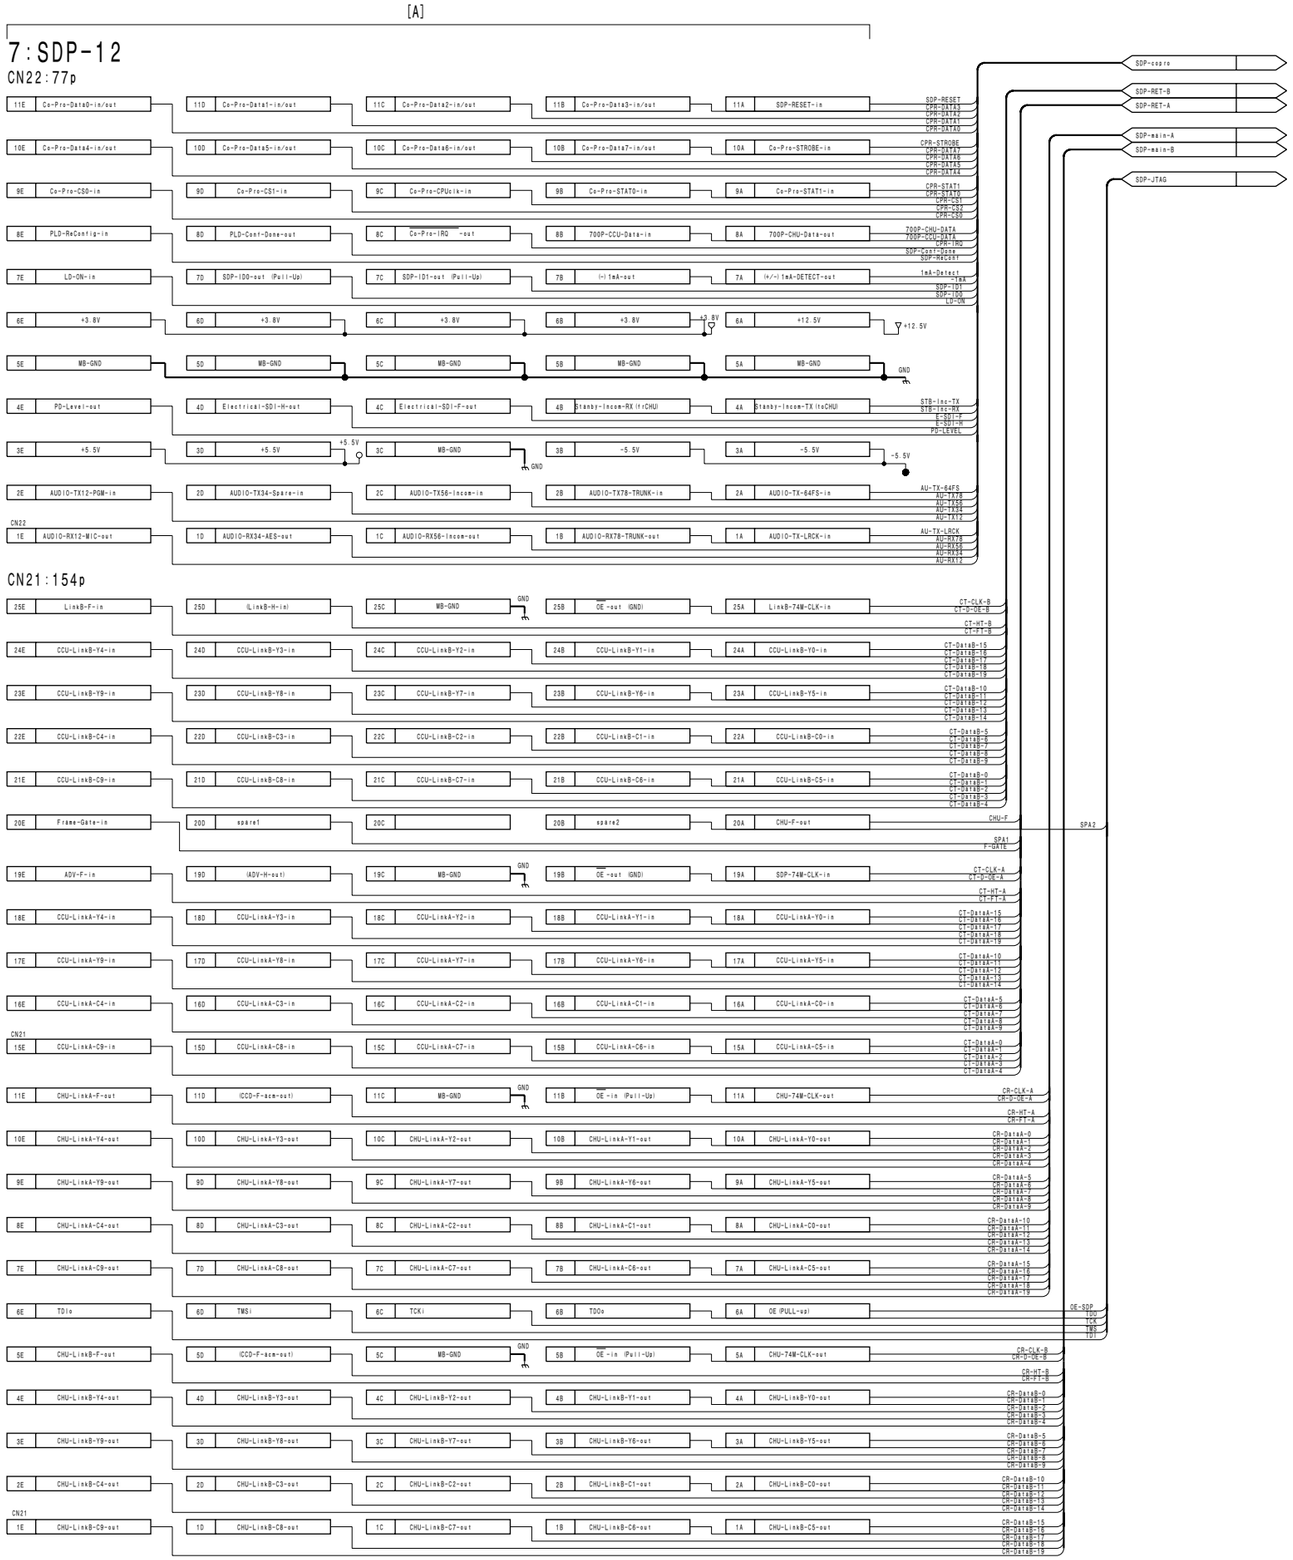

MB-1071A (2/3)
BOARD NO. 1-867-876-41

MB-1071 (2/3)
BOARD NO. 1-867-876-11, 31
HDCU1000_MB-1071_011_2

MB-1071 (3/3), MB-1071A (3/3)
SUFFIX: -11, -31 SUFFIX: -41

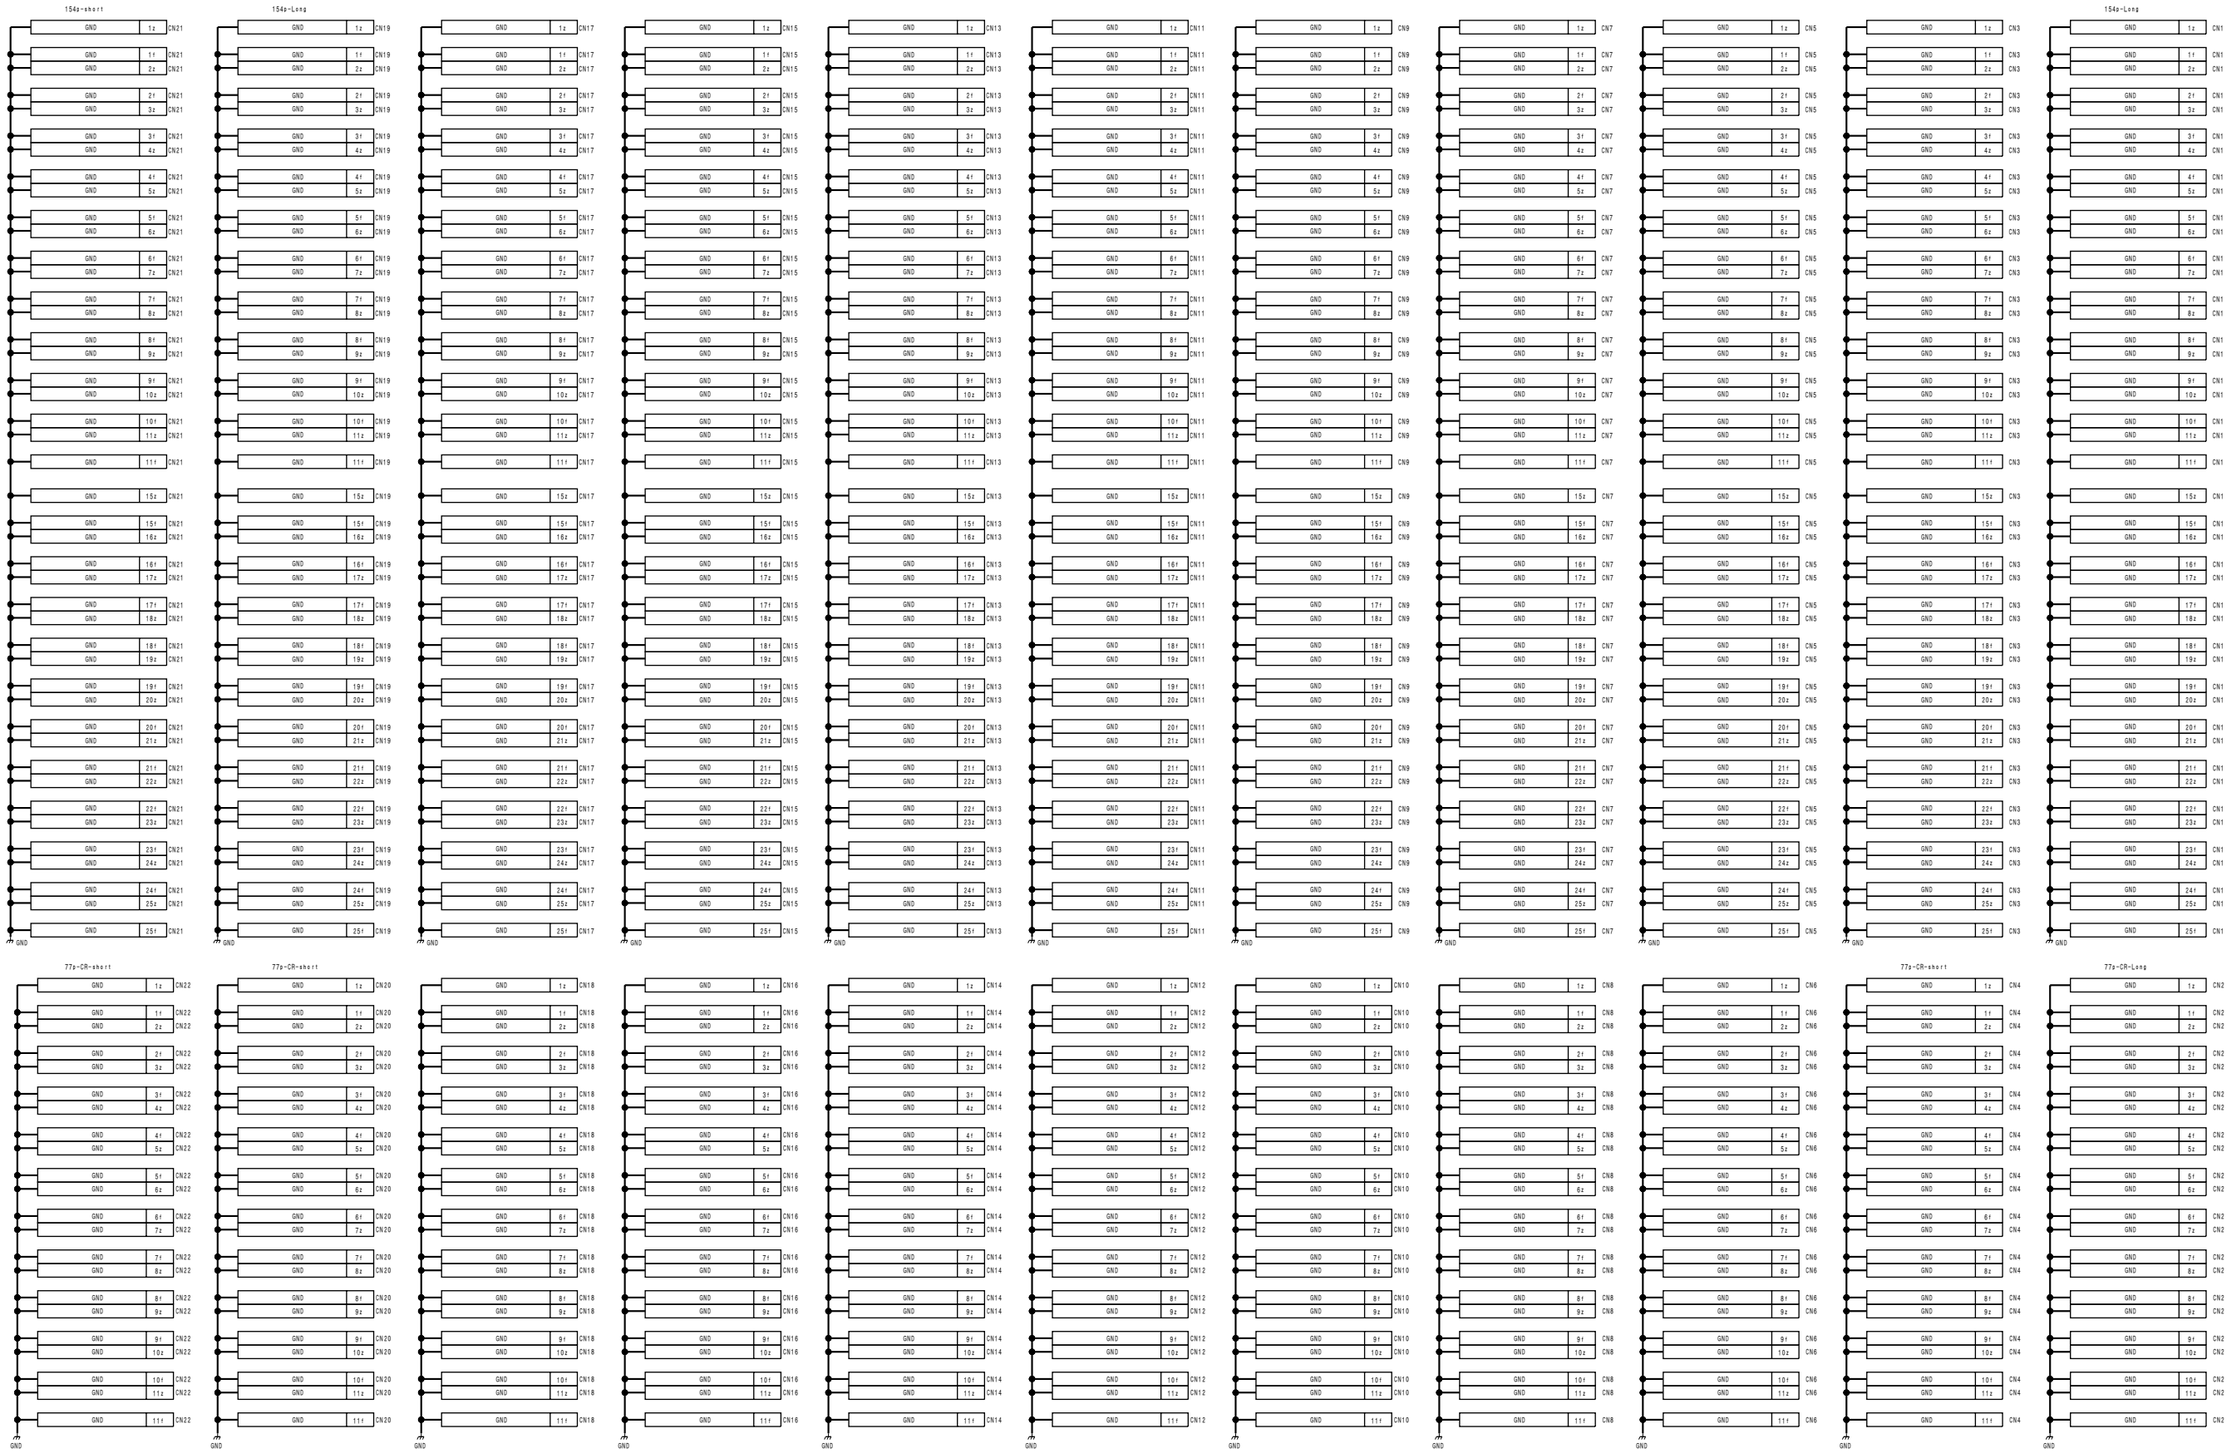

MB-1071A (3/3)
BOARD NO. 1-867-876-41

MB-1071 (3/3)
BOARD NO. 1-867-876-11, 31

HDCU1000_MB-1071_011_3

7-79

[A]

7 : SDP-12

CN22 : 77p

11E	Cx-Prx-Data0-in/out	11D	Cx-Prx-Data1-in/out	11C	Cx-Prx-Data2-in/out	11B	Cx-Prx-Data3-in/out	11A	SDP-RESET-in
10E	Cx-Prx-Data4-in/out	10D	Cx-Prx-Data5-in/out	10C	Cx-Prx-Data6-in/out	10B	Cx-Prx-Data7-in/out	10A	Cx-Prx-STROBE-in
9E	Cx-Prx-CS0-in	9D	Cx-Prx-CS1-in	9C	Cx-Prx-CPUclk-in	9B	Cx-Prx-STAT0-in	9A	Cx-Prx-STAT1-in
8E	PLD-ReConfig-in	8D	PLD-Conf-Done-out	8C	Cx-Prx-IRQ -out	8B	700P-CCU-Data-in	8A	700P-CHU-Data-out
7E	LD-ON-in	7D	SDP-IO0-out (Pull-Up)	7C	SDP-IO1-out (Pull-Up)	7B	(-) 1mA-out	7A	(+/-) 1mA-DETECT-out
6E	+3.8V	6D	+3.8V	6C	+3.8V	6B	+3.8V	6A	+12.5V
5E	WB-GND	5D	WB-GND	5C	WB-GND	5B	WB-GND	5A	WB-GND
4E	PC-Level-out	4D	Electrical-SDI-H-out	4C	Electrical-SDI-F-out	4B	Standy-Iocom-RX if/CHU	4A	Standy-Iocom-TX if/CHU
3E	+5.5V	3D	+5.5V	3C	WB-GND	3B	-5.5V	3A	-5.5V
2E	AUDIO-TX12-PGM-in	2D	AUDIO-TX34-Spare-in	2C	AUDIO-TX56-Iocom-in	2B	AUDIO-TX78-TRUNK-in	2A	AUDIO-TX-64FS-in
1E	AUDIO-RX12-WIC-out	1D	AUDIO-RX34-AES-out	1C	AUDIO-RX56-Iocom-out	1B	AUDIO-RX78-TRUNK-out	1A	AUDIO-TX-LRCK-in

CN22 1815595511

CN21 : 154p

25E	LinkB-F-in	25D	iLinkB-H-in	25C	WB-GND	25B	OE -out (GND)	25A	LinkB-74W-CLK-in
24E	CCU-LinkB-Y4-in	24D	CCU-LinkB-Y3-in	24C	CCU-LinkB-Y2-in	24B	CCU-LinkB-Y1-in	24A	CCU-LinkB-Y0-in
23E	CCU-LinkB-Y9-in	23D	CCU-LinkB-Y8-in	23C	CCU-LinkB-Y7-in	23B	CCU-LinkB-Y6-in	23A	CCU-LinkB-Y5-in
22E	CCU-LinkB-C4-in	22D	CCU-LinkB-C3-in	22C	CCU-LinkB-C2-in	22B	CCU-LinkB-C1-in	22A	CCU-LinkB-C0-in
21E	CCU-LinkB-C9-in	21D	CCU-LinkB-C8-in	21C	CCU-LinkB-C7-in	21B	CCU-LinkB-C6-in	21A	CCU-LinkB-C5-in
20E	Frame-Gate-in	20D	spare1	20C		20B	spare2	20A	CHU-F-out
19E	ADV-F-in	19D	iADV-H-out)	19C	WB-GND	19B	OE -out (GND)	19A	SDP-74W-CLK-in
18E	CCU-LinkA-Y4-in	18D	CCU-LinkA-Y3-in	18C	CCU-LinkA-Y2-in	18B	CCU-LinkA-Y1-in	18A	CCU-LinkA-Y0-in
17E	CCU-LinkA-Y9-in	17D	CCU-LinkA-Y8-in	17C	CCU-LinkA-Y7-in	17B	CCU-LinkA-Y6-in	17A	CCU-LinkA-Y5-in
16E	CCU-LinkA-C4-in	16D	CCU-LinkA-C3-in	16C	CCU-LinkA-C2-in	16B	CCU-LinkA-C1-in	16A	CCU-LinkA-C0-in
15E	CCU-LinkA-C9-in	15D	CCU-LinkA-C8-in	15C	CCU-LinkA-C7-in	15B	CCU-LinkA-C6-in	15A	CCU-LinkA-C5-in

CN21 1794781111

11E	CHU-LinkA-F-out	11D	iCCD-F-aca-out)	11C	WB-GND	11B	OE -in (Pull-Up)	11A	CHU-74W-CLK-out
10E	CHU-LinkA-Y4-out	10D	CHU-LinkA-Y3-out	10C	CHU-LinkA-Y2-out	10B	CHU-LinkA-Y1-out	10A	CHU-LinkA-Y0-out
9E	CHU-LinkA-Y9-out	9D	CHU-LinkA-Y8-out	9C	CHU-LinkA-Y7-out	9B	CHU-LinkA-Y6-out	9A	CHU-LinkA-Y5-out
8E	CHU-LinkA-C4-out	8D	CHU-LinkA-C3-out	8C	CHU-LinkA-C2-out	8B	CHU-LinkA-C1-out	8A	CHU-LinkA-C0-out
7E	CHU-LinkA-C9-out	7D	CHU-LinkA-C8-out	7C	CHU-LinkA-C7-out	7B	CHU-LinkA-C6-out	7A	CHU-LinkA-C5-out
6E	TDIn	6D	TMSI	6C	TCKI	6B	TDOx	6A	OE (PULL-up)
5E	CHU-LinkB-F-out	5D	iCCD-F-aca-out)	5C	WB-GND	5B	OE -in (Pull-Up)	5A	CHU-74W-CLK-out
4E	CHU-LinkB-Y4-out	4D	CHU-LinkB-Y3-out	4C	CHU-LinkB-Y2-out	4B	CHU-LinkB-Y1-out	4A	CHU-LinkB-Y0-out
3E	CHU-LinkB-Y9-out	3D	CHU-LinkB-Y8-out	3C	CHU-LinkB-Y7-out	3B	CHU-LinkB-Y6-out	3A	CHU-LinkB-Y5-out
2E	CHU-LinkB-C4-out	2D	CHU-LinkB-C3-out	2C	CHU-LinkB-C2-out	2B	CHU-LinkB-C1-out	2A	CHU-LinkB-C0-out
1E	CHU-LinkB-C9-out	1D	CHU-LinkB-C8-out	1C	CHU-LinkB-C7-out	1B	CHU-LinkB-C6-out	1A	CHU-LinkB-C5-out

to CHU

from CHU

6 : DRX-5/EN-159

CN11

1B				1A					
1D				1C	WB-GND				
				1E					
RW-R				(Fr-RW-R-V2A-out)		2B			
RW-G	(Video-GND)	2B		(Fr-RW-G-V2A-out)		2C			
RW-B	(Video-GND)	2D		(Fr-RW-B-V2A-out)		2E			
						3A			
		3B				3C			
RW-VD	(Fr-RW-VD-V2A-out)	3D		(Fr-RW-HD-V2A-out)		3E			
4B	MAIN-VBS1 (S) -out			4A	MAIN-VBS1 (S) -out				
4D	VDA2-Bare-IDO-in			4C					
				4E	VDA2-Bare-ID1-in				
5B				5A					
5D				5C	Frame-Reset-Gate-out				
				5E	Sub-Reference-in				
6B	+3.8V			6A	+3.8V				
6D	+3.8V			6C	+3.8V				
				6E	+3.8V				
7B	SD-Y1-in			7A	SD-Y0-in				
7D	SD-Y3-in			7C	SD-Y2-in				
				7E	SD-Y4-in				
8B	SD-Y6-in			8A	SD-Y5-in				
8D	SD-Y8-in			8C	SD-Y7-in				
				8E	SD-Y9-in				
9B	SD-C1-in			9A	SD-C0-in				
9D	SD-C3-in			9C	SD-C2-in				
				9E	SD-C4-in				
10B	SD-C6-in			10A	SD-C5-in				
10D	SD-C8-in			10C	SD-C7-in				
				10E	SD-C9-in				
11B	OE -out (GND)			11A	STD-27W-CLK-in				
11D	VIDEO-F-in			11C	WB-GND				
				11E	MST-HD/SD-F-in (CF)				

EN-159A/B
DRX-5 (3rd)

SYNC (S) -out	15B	SYNC (S) -out	15A
MAIN-VBS2 (S) -out	15D	WB-GND	15C
		MAIN-VBS2 (S) -out	15E
Fr-RW-G-out	16B	Fr-RW-R-out	16A
Video-GND	16D	Fr-RW-G-out	16C
		Fr-RW-B-out	16E
	17B	VDA2-Rate1-SEL0-out	17A
RW-VD	17D	VDA2-Rate1-SEL1-out	17C
		Fr-RW-VD-out	17E
Video-GND	18B	R/R-Y-out	18A
Video-GND	18D	G/Y -out	18C
		B/B-Y-out	18E
	19B		19A
	19D		19C
			19E
20B Guard-GND		20A Guard-GND	
20D Rear-Bare-IDO-in		20C	
		20E Rear-Bare-ID1-in	
21B PIX (G) -out		21A PIX (X) -out	
21D VCS-Rate1-OFF/ON-out		21C	
		Rear-SEL1-out	
22B Guard-GND		22A	
22D Extra1-Rate1-SYNC-in		22C Guard-GND	
		22E Extra1-Rate1-SC-in	
23B WB-GND		23A Guard-GND	
23D +5.5V		23C +5.5V	
		23E +5.5V	
24B MFW (S) -out		24A MFW (X) -out	
24D -5.5V		24C WB-GND	
		24E -5.5V	
25B Guard-GND		25A	
25D nc		25C nc	
		25E REAR-ALARM	
		(VDA-NG/OK-in)	

EN-159A/B
DRX-5 (2nd)

OE -in (Pull-Up)	15B	STD-74W-CLK-out	15A
VIDEO-F-out	15D	WB-GND	15C
		MST-HD/SD-F-out (CF)	15E
HD/SD-Y1-out	16B	HD/SD-Y0-out	16A
HD/SD-Y3-out	16D	HD/SD-Y2-out	16C
		HD/SD-Y4-out	16E
HD/SD-Y6-out	17B	HD/SD-Y5-out	17A
HD/SD-Y8-out	17D	HD/SD-Y7-out	17C
		HD/SD-Y9-out	17E
HD/SD-C1-out	18B	HD/SD-C0-out	18A
HD/SD-C3-out	18D	HD/SD-C2-out	18C
		HD/SD-C4-out	18E
HD/SD-C6-out	19B	HD/SD-C5-out	19A
HD/SD-C8-out	19D	HD/SD-C7-out	19C
		HD/SD-C9-out	19E
20B Guard-GND		20A Guard-GND	
20D Rear-Bare-IDO-in		20C RW-PIX (G) -out	
		20E Rear-Bare-ID1-in	
21B Guard-GND		21A MAIN (Link4) -SDI (X) -out	
21D Rear-SEL0-out		21C RW-PIX (X) -out	
		21E Rear-SEL1-out	
22B Guard-GND		22A MAIN (Link4) -SDI (Y) -out	
22D Output-SDI-HD/SD-out		22C CCU-Ref-F-in	
		22E Extra-Ref-SC-in	
23B WB-GND		23A Guard-GND	
23D +5.5V		23C +5.5V	
		23E +5.5V	
24B Guard-GND		24A MON1-SDI (X) -out	
24D -5.5V		24C WB-GND	
		24E -5.5V	
25B Guard-GND		25A MON1-SDI (Y) -out	
25D nc		25C nc	
		25E REAR-ALARM	
		(HiF-OK/NG-in)	

5 : DRX-5/EN-159

CN9

1B	OE -out (GND)			1A	CHU-74W-CLK-in				
1D	CCD-F-aca-in)			1C	WB-GND				
				1E	CHU-LinkB-F-in				
2B	CHU-LinkB-Y1-in			2A	CHU-LinkB-Y0-in				
2D	CHU-LinkB-Y3-in			2C	CHU-LinkB-Y2-in				
				2E	CHU-LinkB-Y4-in				
3B	CHU-LinkB-Y6-in			3A	CHU-LinkB-Y5-in				
3D	CHU-LinkB-Y8-in			3C	CHU-LinkB-Y7-in				
				3E	CHU-LinkB-Y9-in				
4B	CHU-LinkB-C1-in			4A	CHU-LinkB-C0-in				
4D	CHU-LinkB-C3-in			4C	CHU-LinkB-C2-in				
				4E	CHU-LinkB-C4-in				
5B	CHU-LinkB-C6-in			5A	CHU-LinkB-C5-in				
5D	CHU-LinkB-C8-in			5C	CHU-LinkB-C7-in				
				5E	CHU-LinkB-C9-in				
6B	+3.8V			6A	+3.8V				
6D	+3.8V			6C	+3.8V				
				6E	+3.8V				
7B	HD-LinkA-Y1-in			7A	HD-LinkA-Y0-in				
7D	HD-LinkA-Y3-in			7C	HD-LinkA-Y2-in				
				7E	HD-LinkA-Y4-in				
8B	HD-LinkA-Y6-in			8A	HD-LinkA-Y5-in				
8D	HD-LinkA-Y8-in			8C	HD-LinkA-Y7-in				
				8E	HD-LinkA-Y9-in				
9B	HD-LinkA-C1-in			9A	HD-LinkA-C0-in				
9D	HD-LinkA-C3-in			9C	HD-LinkA-C2-in				
				9E	HD-LinkA-C4-in				
10B	HD-LinkA-C6-in			10A	HD-LinkA-C5-in				
10D	HD-LinkA-C8-in			10C	HD-LinkA-C7-in				
				10E	HD-LinkA-C9-in				
11B	OE -out (GND)			11A	STD-74W-CLK-in				
11D	VIDEO-F-in			11C	WB-GND				
				11E	MST-HD/SD-F-in				

EN-159A/B
DRX-5 (1st)

OE -in (Pull-Up)	15B	STD-74W-CLK-out	15A
VIDEO-F-out	15D	WB-GND	15C
		MST-HD/SD-F-out (CF)	15E
HD/SD-Y0-out	16B	HD/SD-Y1-out	16A
HD/SD-Y2-out	16D	HD/SD-Y3-out	16C
HD/SD-Y4-out	16E		
HD/SD-Y5-out	17B	HD/SD-Y6-out	17A
HD/SD-Y7-out	17D	HD/SD-Y8-out	17C
HD/SD-Y9-out	17E		
HD/SD-C0-out	18B	HD/SD-C1-out	18A
HD/SD-C2-out	18D	HD/SD-C3-out	18C
HD/SD-C4-out	18E		
HD/SD-C5-out	19B	HD/SD-C6-out	19A
HD/SD-C7-out	19D	HD/SD-C8-out	19C
HD/SD-C9-out	19E		
20B Guard-GND		20A Guard-GND	
20D Rear-Bare-IDO-in		20C RW-PIX-G	
		20E Rear-Bare-ID1-in	
21B Guard-GND		21A MAIN (Link4) -SDI (X) -out	
21D Rear-SEL0-out		21C RW-PIX-X	
		21E Rear-SEL1-out	
22B Guard-GND		22A MAIN (Link4) -SDI (Y) -out	
		22C	
		22E	
23B WB-GND		23A Guard-GND	
23D +5.5V		23C +5.5V	
		23E +5.5V	
24B Guard-GND		24A MON1-SDI (X) -out	
24D -5.5V		24C WB-GND	
		24E -5.5V	
25B Guard-GND		25A MON1-SDI (Y) -out	
25D nc		25C nc	
		25E REAR-ALARM	
		(HiF-OK/NG-in)	

4 : DRX-5

CN7

1B	OE -out (GND)			1A	CHU-74W-CLK-in				
1D	CCD-F-aca-in)			1C	WB-GND				
				1E	CHU-LinkA-F-in				
2B	CHU-LinkA-C6-in			2A	CHU-LinkA-C5-in				
2D	CHU-LinkA-C8-in			2C	CHU-LinkA-C7-in				
				2E	CHU-LinkA-C9-in				
3B	CHU-LinkA-C1-in			3A	CHU-LinkA-C0-in				
3D	CHU-LinkA-C3-in			3C	CHU-LinkA-C2-in				
				3E	CHU-LinkA-C4-in				
4B	CHU-LinkA-Y6-in			4A	CHU-LinkA-Y5-in				
4D	CHU-LinkA-Y8-in			4C	CHU-LinkA-Y7-in				
				4E	CHU-LinkA-Y9-in				
5B	CHU-LinkA-Y1-in			5A	CHU-LinkA-Y0-in				
5D	CHU-LinkA-Y3-in			5C	CHU-LinkA-Y2-in				
				5E	CHU-LinkA-Y4-in				
6B	+3.8V			6A	+3.8V				
6D	+3.8V			6C	+3.8V				
				6E	+3.8V				
7B				7A					
7D				7C					
				7E					
8B				8A					
8D				8C					
				8E					
9B				9A					
9D				9C					
				9E					
10B				10A					
10D				10C					
				10E					
11B	OE -out (GND)			11A	WST-74W-CLK-B-in				
11D				11C	WB-GND				
				11E	WST-HD/SD-F-B-in				

DRX-5 (1st)

OE -in (Pull-Up)	15B	STD-74W-CLK-out	15A
VIDEO-F-out	15D	WB-GND	15C
		MST-HD/SD-F-out	15E
HD-LinkA-Y1-out	16B	HD-LinkA-Y0-out	16A
HD-LinkA-Y3-out	16D	HD-LinkA-Y2-out	16C
		HD-LinkA-Y4-out	16E
HD-LinkA-Y6-out	17B	HD-LinkA-Y5-out	17A
HD-LinkA-Y8-out	17D	HD-LinkA-Y7-out	17C
		HD-LinkA-Y9-out	17E
HD-LinkA-C1-out	18B	HD-LinkA-C0-out	18A
HD-LinkA-C3-out	18D	HD-LinkA-C2-out	18C
		HD-LinkA-C4-out	18E
HD-LinkA-C6-out	19B	HD-LinkA-C5-out	19A
HD-LinkA-C8-out	19D	HD-LinkA-C7-out	19C
		HD-LinkA-C9-out	19E
20B Guard-GND		20A Guard-GND	
20D Rear-Bare-IDO-in		20C RW-PIX-G	
		20E Rear-Bare-ID1-in	
21B Guard-GND		21A MAIN (Link4) -SDI (X) -out	
21D Rear-SEL0-out		21C RW-PIX-X	
		21E Rear-SEL1-out	
22B Guard-GND		22A MAIN (Link4) -SDI (Y) -out	
		22C	
		22E	
23B WB-GND		23A Guard-GND	
23D +5.5V		23C +5.5V	
		23E +5.5V	
24B Guard-GND		24A MON1-SDI (X) -out	
24D -5.5V		24C WB-GND	
		24E -5.5V	
25B Guard-GND		25A MON1-SDI (Y) -out	
25D nc		25C nc	
		25E REAR-ALARM	
		(HiF-OK/NG-in)	

EN-159A/B
DRX-5 (3rd)

WB-GND		WB-GND	
WB-GND		WB-GND	
		WB-GND	
CLK-Gate-GND		27W-CLK-D-in	
MST-RESET		MST-SD-F-D-in	
		Frame-GATE	
+12.5V			
-12.5V		WB-GND	
(SDI-MIC-64FS)	4E	(SDI-MIC-LRCK)	
		Chara-Gen-clk-B-in	4E
(SDI-MIC3/4)	5D	(SDI-MIC1/2)	
		Chara-Gen-Data-in	5E
		MFW-STATR-CASE-out	
SLOT-1D5		SLOT-1D4	
		SLOT-1D6	
CS0		CPU-CK	
CS2		CS1	
		CS3	
ADDR (1)		ADDR (0)	
ADDR (3)		ADDR (2)	
		WR	
ADDR (5)		ADDR (4)	
ADDR (7)		ADDR (6)	
		RD	
BUS (1)		BUS (0)	
BUS (3)		BUS (2)	
		SDA	
BUS (5)		BUS (4)	
BUS (7)		BUS (6)	
		SCL	

EN-159A/B
DRX-5 (2nd)

WB-GND		WB-GND	
WB-GND		WB-GND	
		WB-GND	
CLK-Gate-GND		27W-CLK-C-in	
MST-RESET		MST-SD-F-C-in	
		Frame-GATE	
+12.5V			
-12.5V		WB-GND	
SDI-MIC-64FS-in	4E	iQWERTY-WAIT-out)	
		SDI-MIC-LRCK-in	
SDI-MIC-LRCK-out	4D	Chara-Gen-clk-C-in	
		SDI-MIC-64FS-out	4E
SDI-MIC3/4-in	5D	SDI-MIC1/2-in	
SDI-MIC1/2-out	5B	Chara-Gen-Data-in	
		SDI-MIC3/4-out	5E
		MFW-STATR-CASE-out	
SLOT-1D5		SLOT-1D4	
		SLOT-1D6	
CS0		CPU-CK	
CS2		CS1	
		CS3	
ADDR (1)		ADDR (0)	
ADDR (3)		ADDR (2)	
		WR	
ADDR (5)		ADDR (4)	
ADDR (7)		ADDR (6)	
		RD	
BUS (1)		BUS (0)	
BUS (3)		BUS (2)	
		SDA	
BUS (5)		BUS (4)	
BUS (7)		BUS (6)	
		SCL	

DRX-5 (1st)

WB-GND		WB-GND	
WB-GND		WB-GND	
		WB-GND	
CLK-Gate-GND		27W-CLK-B-in	
MST-RESET		MST-SD-F-B-in	
		Frame-GATE	
+12.5V			
-12.5V		WB-GND	
SDI-MIC-64FS-in	4E		
		SDI-MIC-LRCK-in	
SDI-MIC-LRCK-out	4D	Chara-Gen-clk-A-in	
		SDI-MIC-64FS-out	4E
SDI-MIC3/4-in	5D	SDI-MIC1/2-in	
SDI-MIC1/2-out	5B	Chara-Gen-Data-in	
		SDI-MIC3/4-out	5E
SLOT-1D5		SLOT-1D4	
		SLOT-1D6	
CS0		CPU-CK	
CS2		CS1	
		CS3	
ADDR (1)		ADDR (0)	
ADDR (3)		ADDR (2)	
		WR	
ADDR (5)		ADDR (4)	
ADDR (7)		ADDR (6)	
		RD	
BUS (1)		BUS (0)	
BUS (3)		BUS (2)	
		SDA	
BUS (5)		BUS (4)	
BUS (7)		BUS (6)	
		SCL	

OE-SDP
CCK
CDA
WR
RST

SPA2
CHU-F
SPA1
F-GATE

CT-CLK-A
CT-DATA0-19

CR-CLK-A
CR-DATA0-19

CR-CLK-B
CR-DATA0-19

RW-PIXS-G
RW-PIXS-X

74CK-A
74CK-B

27CK-D
SDI-F-D

27CK-C
SDI-F-C

27CK-B
SDI-F-B

MB-1072 (1/2)
SUFFIX: -11, -31

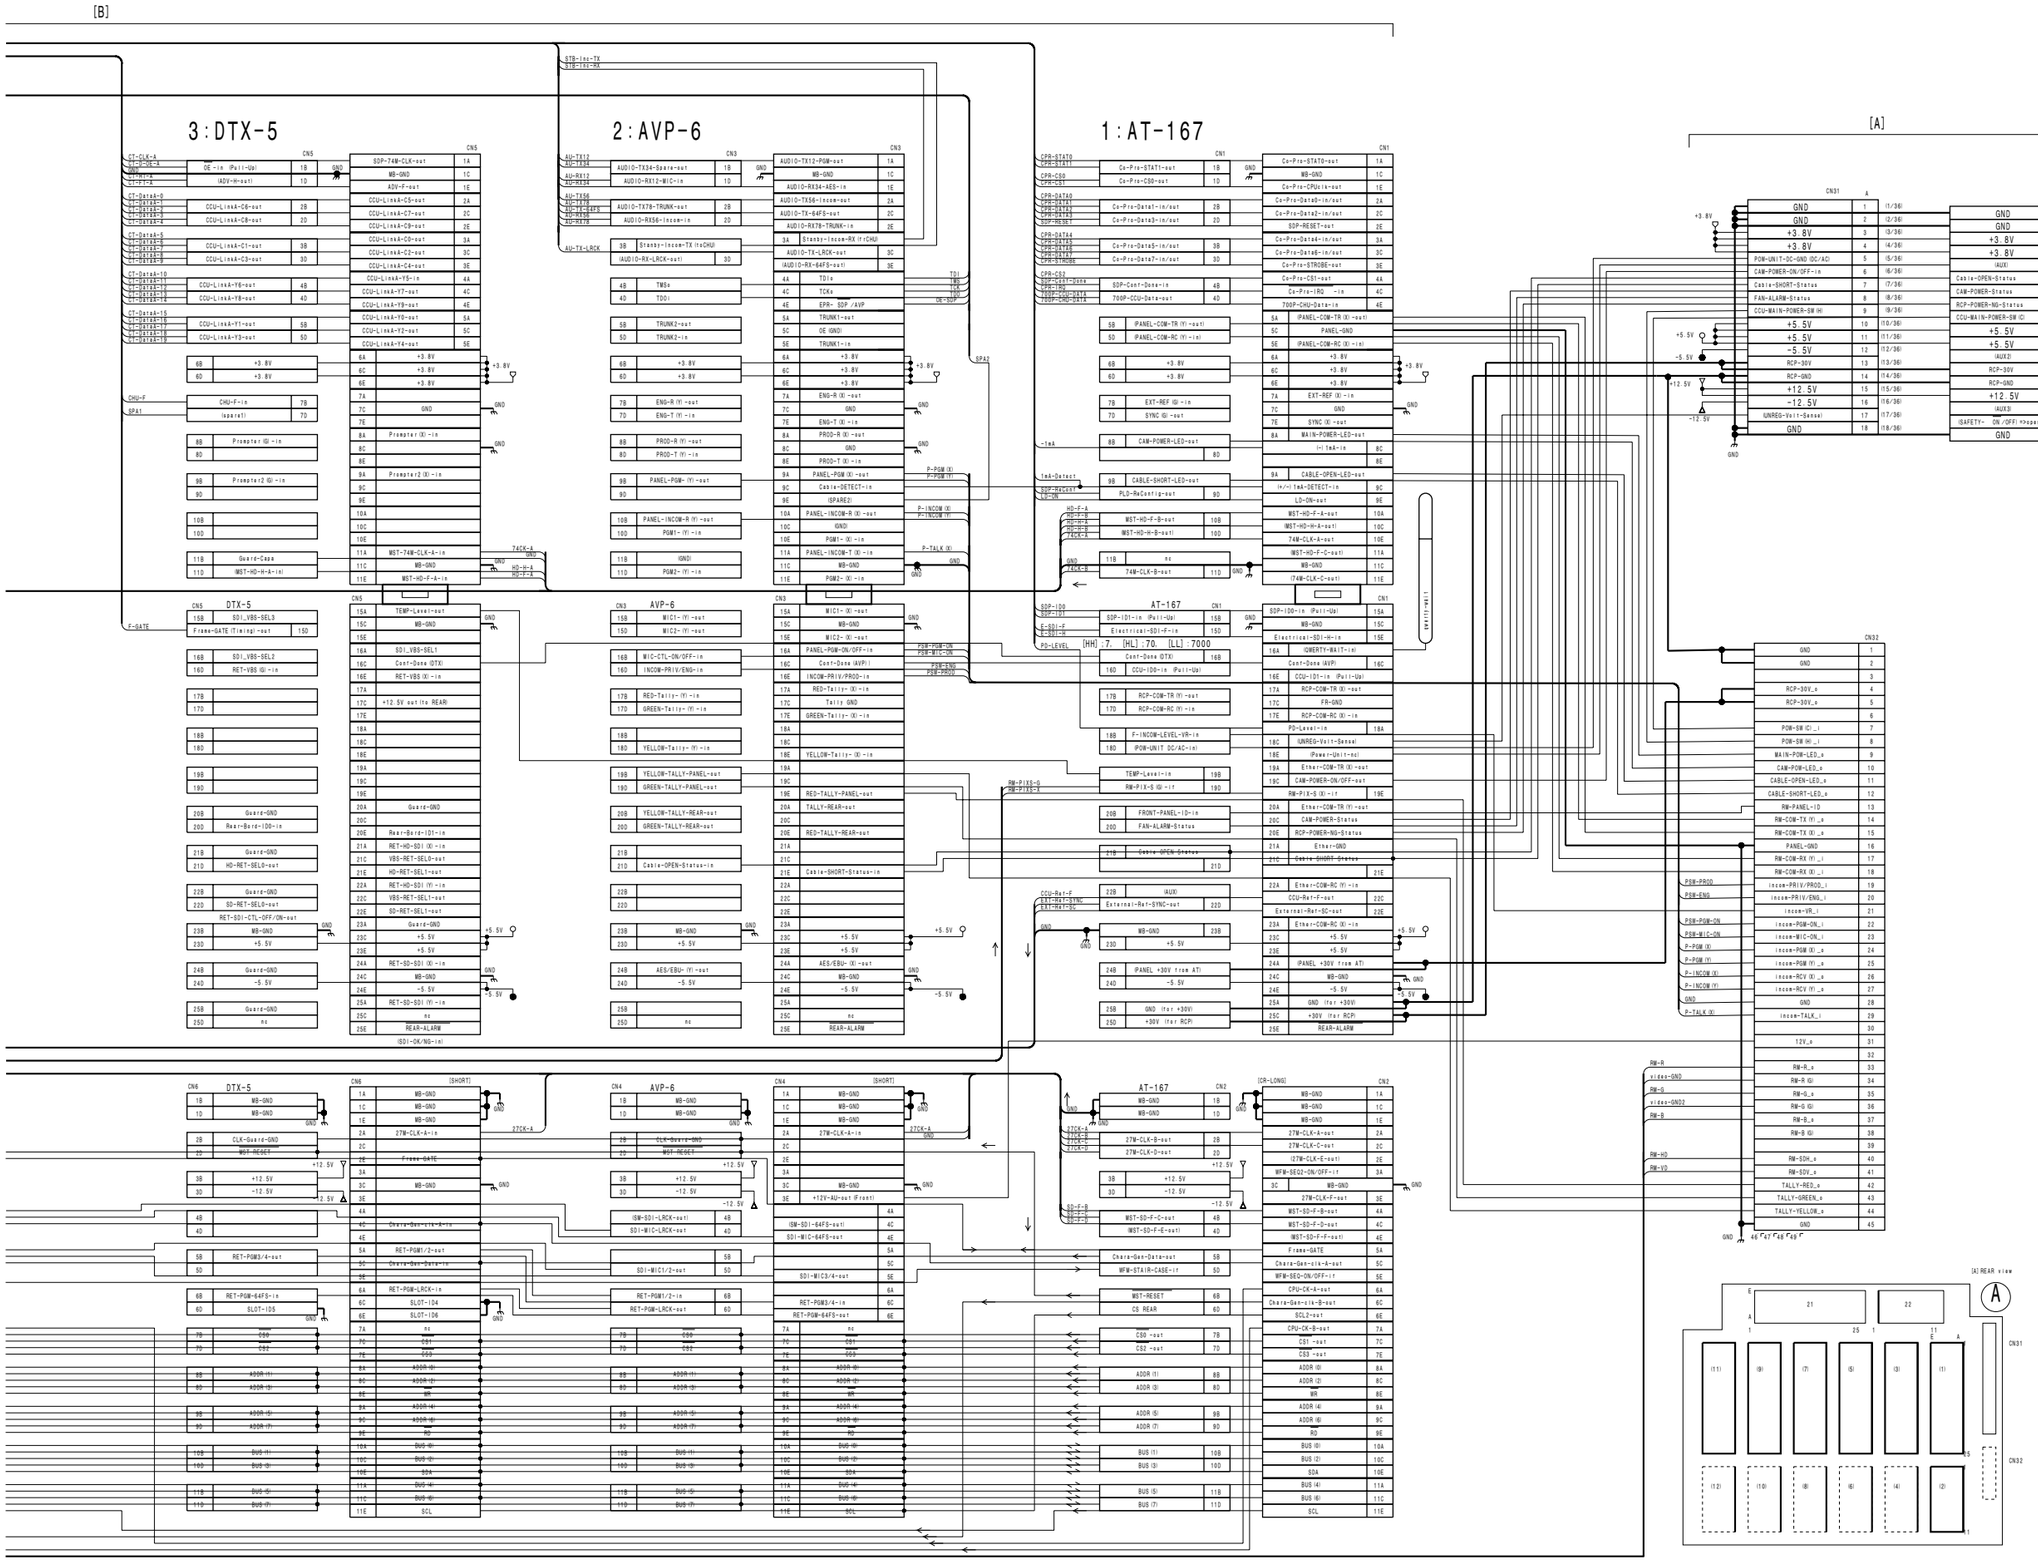

MB-1072 (1/2)

BOARD NO. 1-867-892-11, 31

HDCU1500_MB-1072_011_1

MB-1072 (2/2)

SUFFIX: -11, -31

MB-1072 (2/2)

SUFFIX: -11, -31

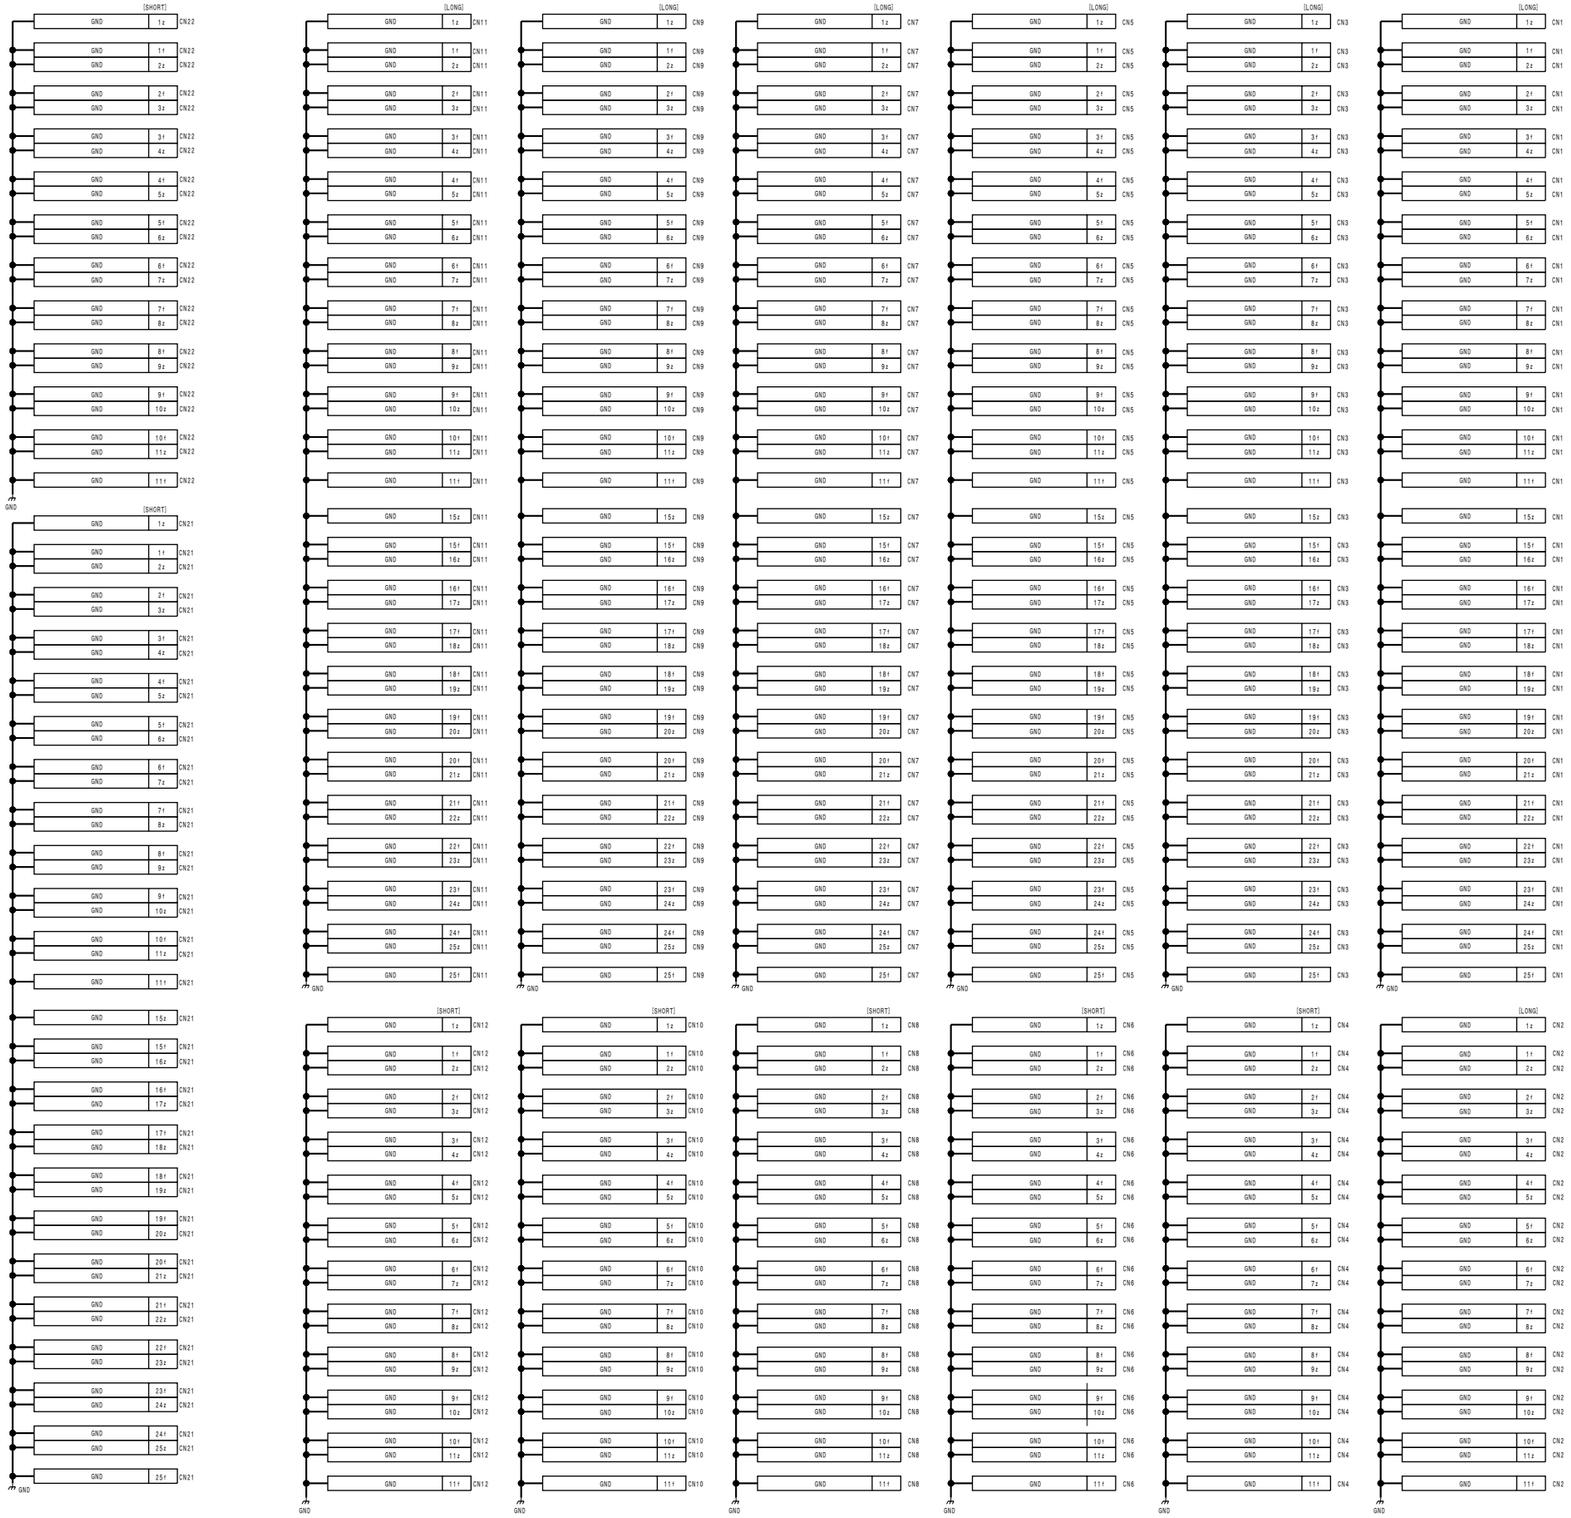

7-82

MB-1072 (2/2)

BOARD NO. 1-867-892-11, 31

HDCU1500_MB-1072_011_2

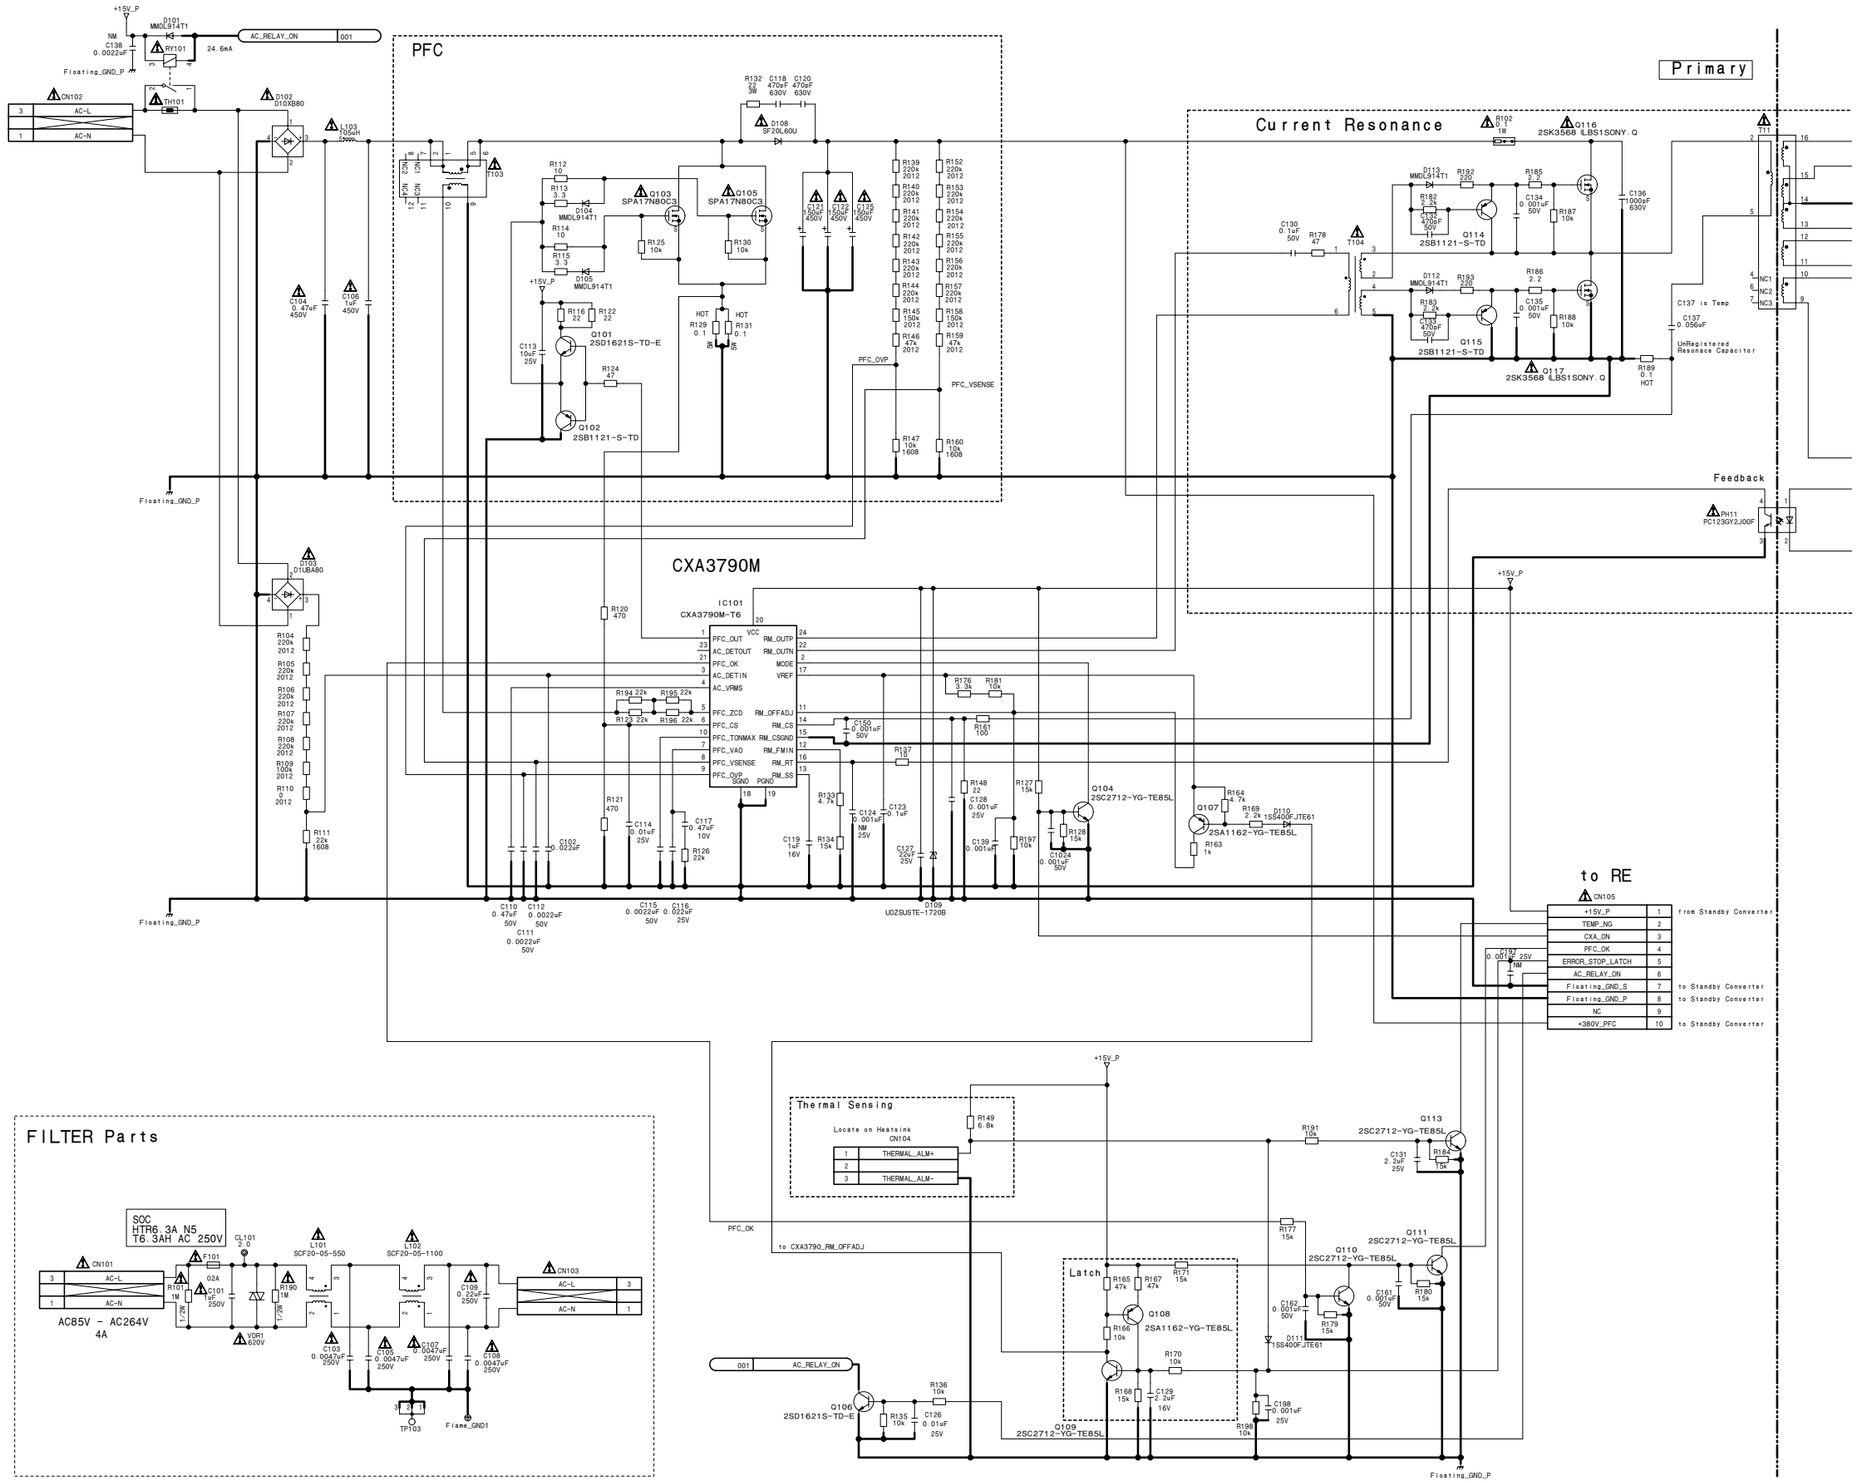
PFC
Primary
Current Resonance
CXA3790M
IC101
CXA3790M-T6
Feedback
to RE
CN105
+15V_P
TEMP_NG
CXA_ON
PFC_OK
ERROR_STOP_LATCH
AC_RELAY_ON
Floating_GND_S
Floating_GND_P
NC
+380V_PFC
from Standby Converter
to Standby Converter
Thermal Sensing
Locate on Heatsink
CN104
THERMAL_ALM+
THERMAL_ALM-
Latch
FILTER Parts
SOC
HTR6.3A N5
T6.3AH AC 250V
AC85V - AC264V
4A
Flame_GND1
TP103
Floating_GND_P
PFC_OVP
PFC_VSENSE
to CXA3790_RM_OFFADJ
UnRegistered
Resonance Capacitor
C137 is Temp

PS-778 (1/2)
SUFFIX: -11

Secondary

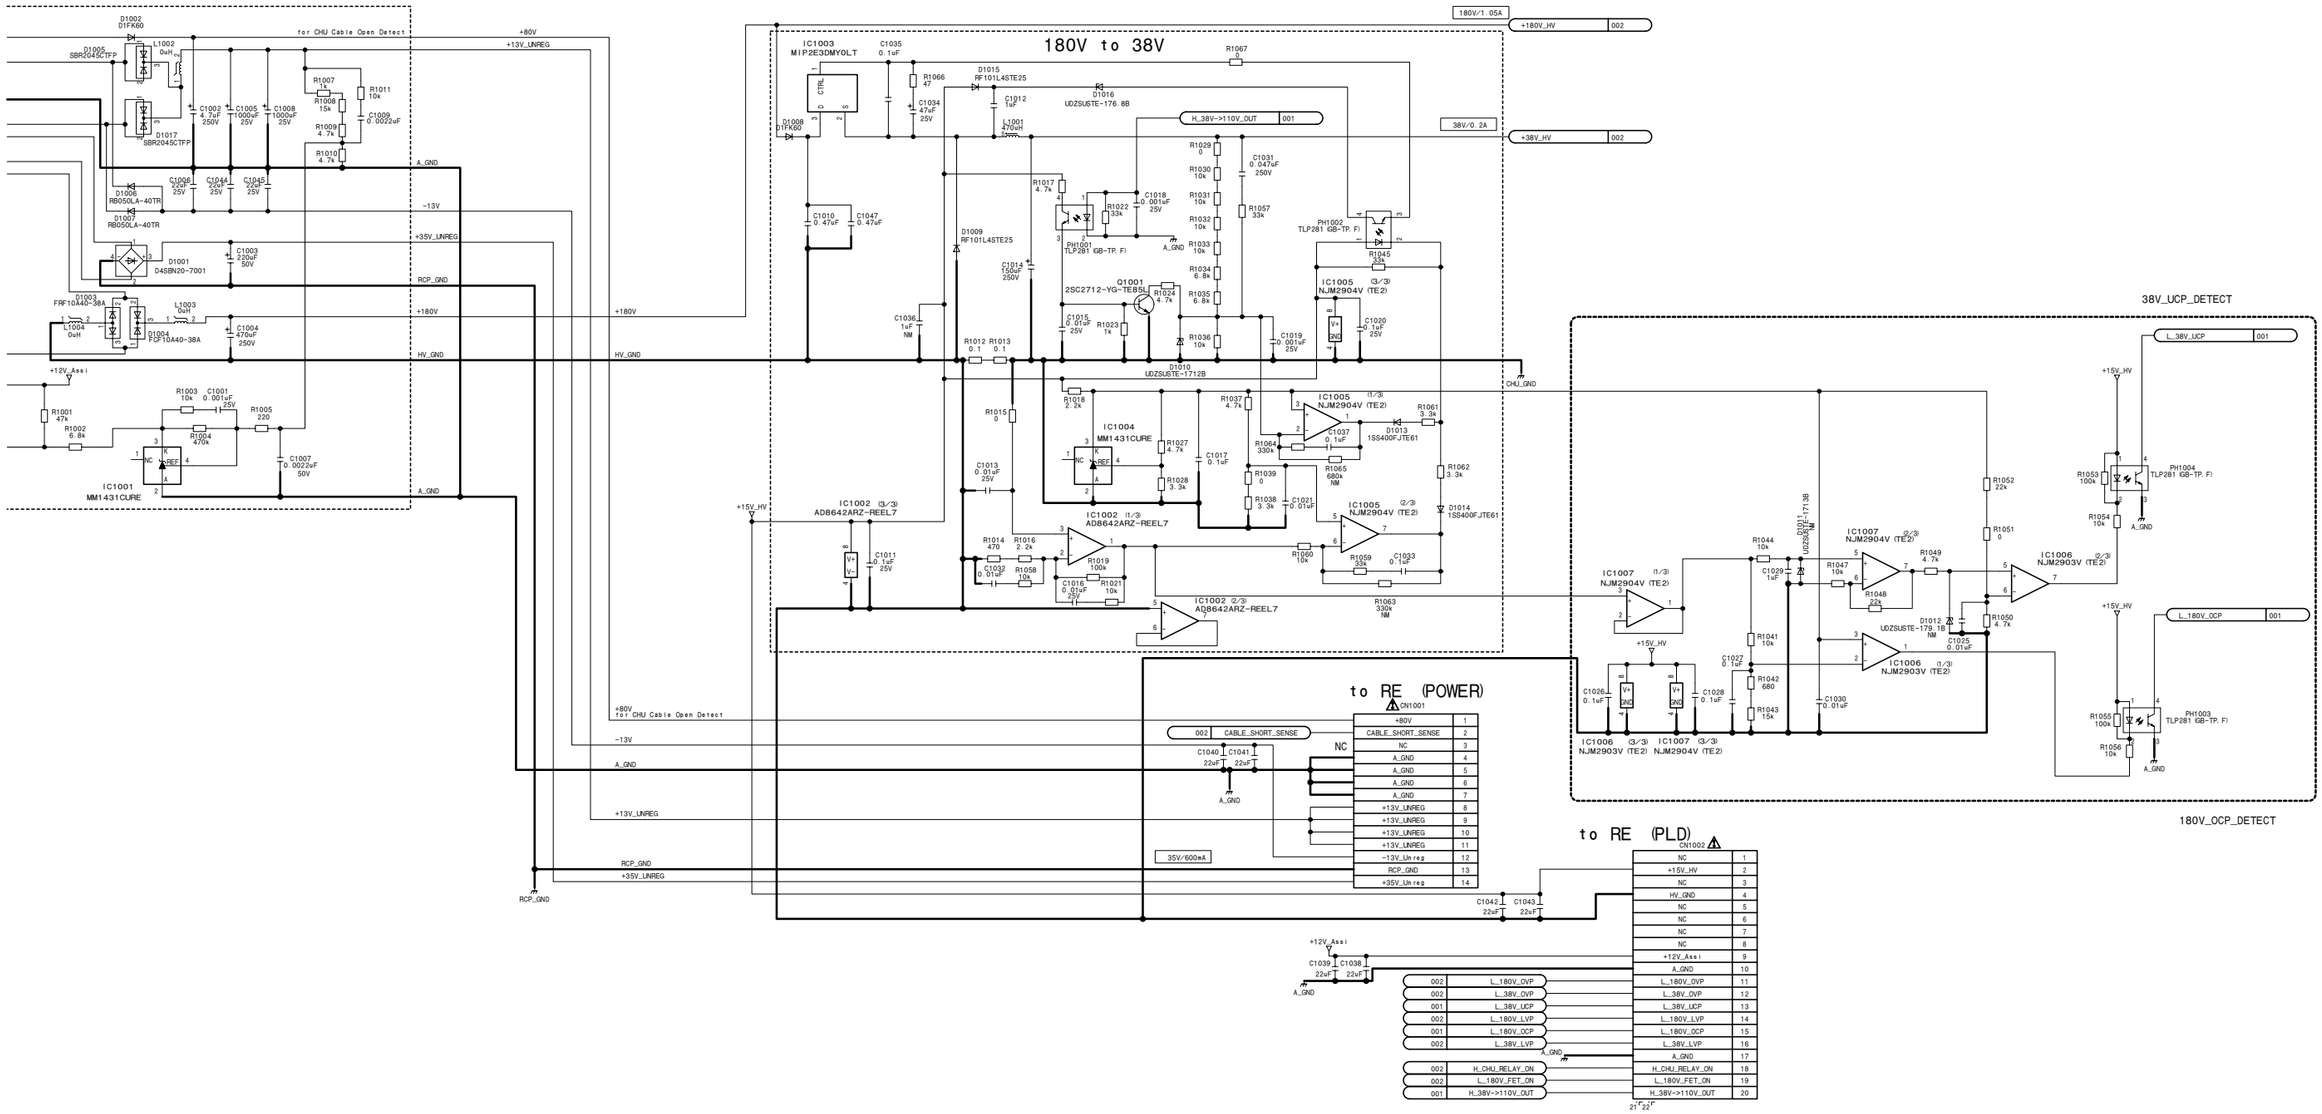

7-85

PS-778 (2/2)
SUFFIX: -11

PS-778 (2/2)
SUFFIX: -11

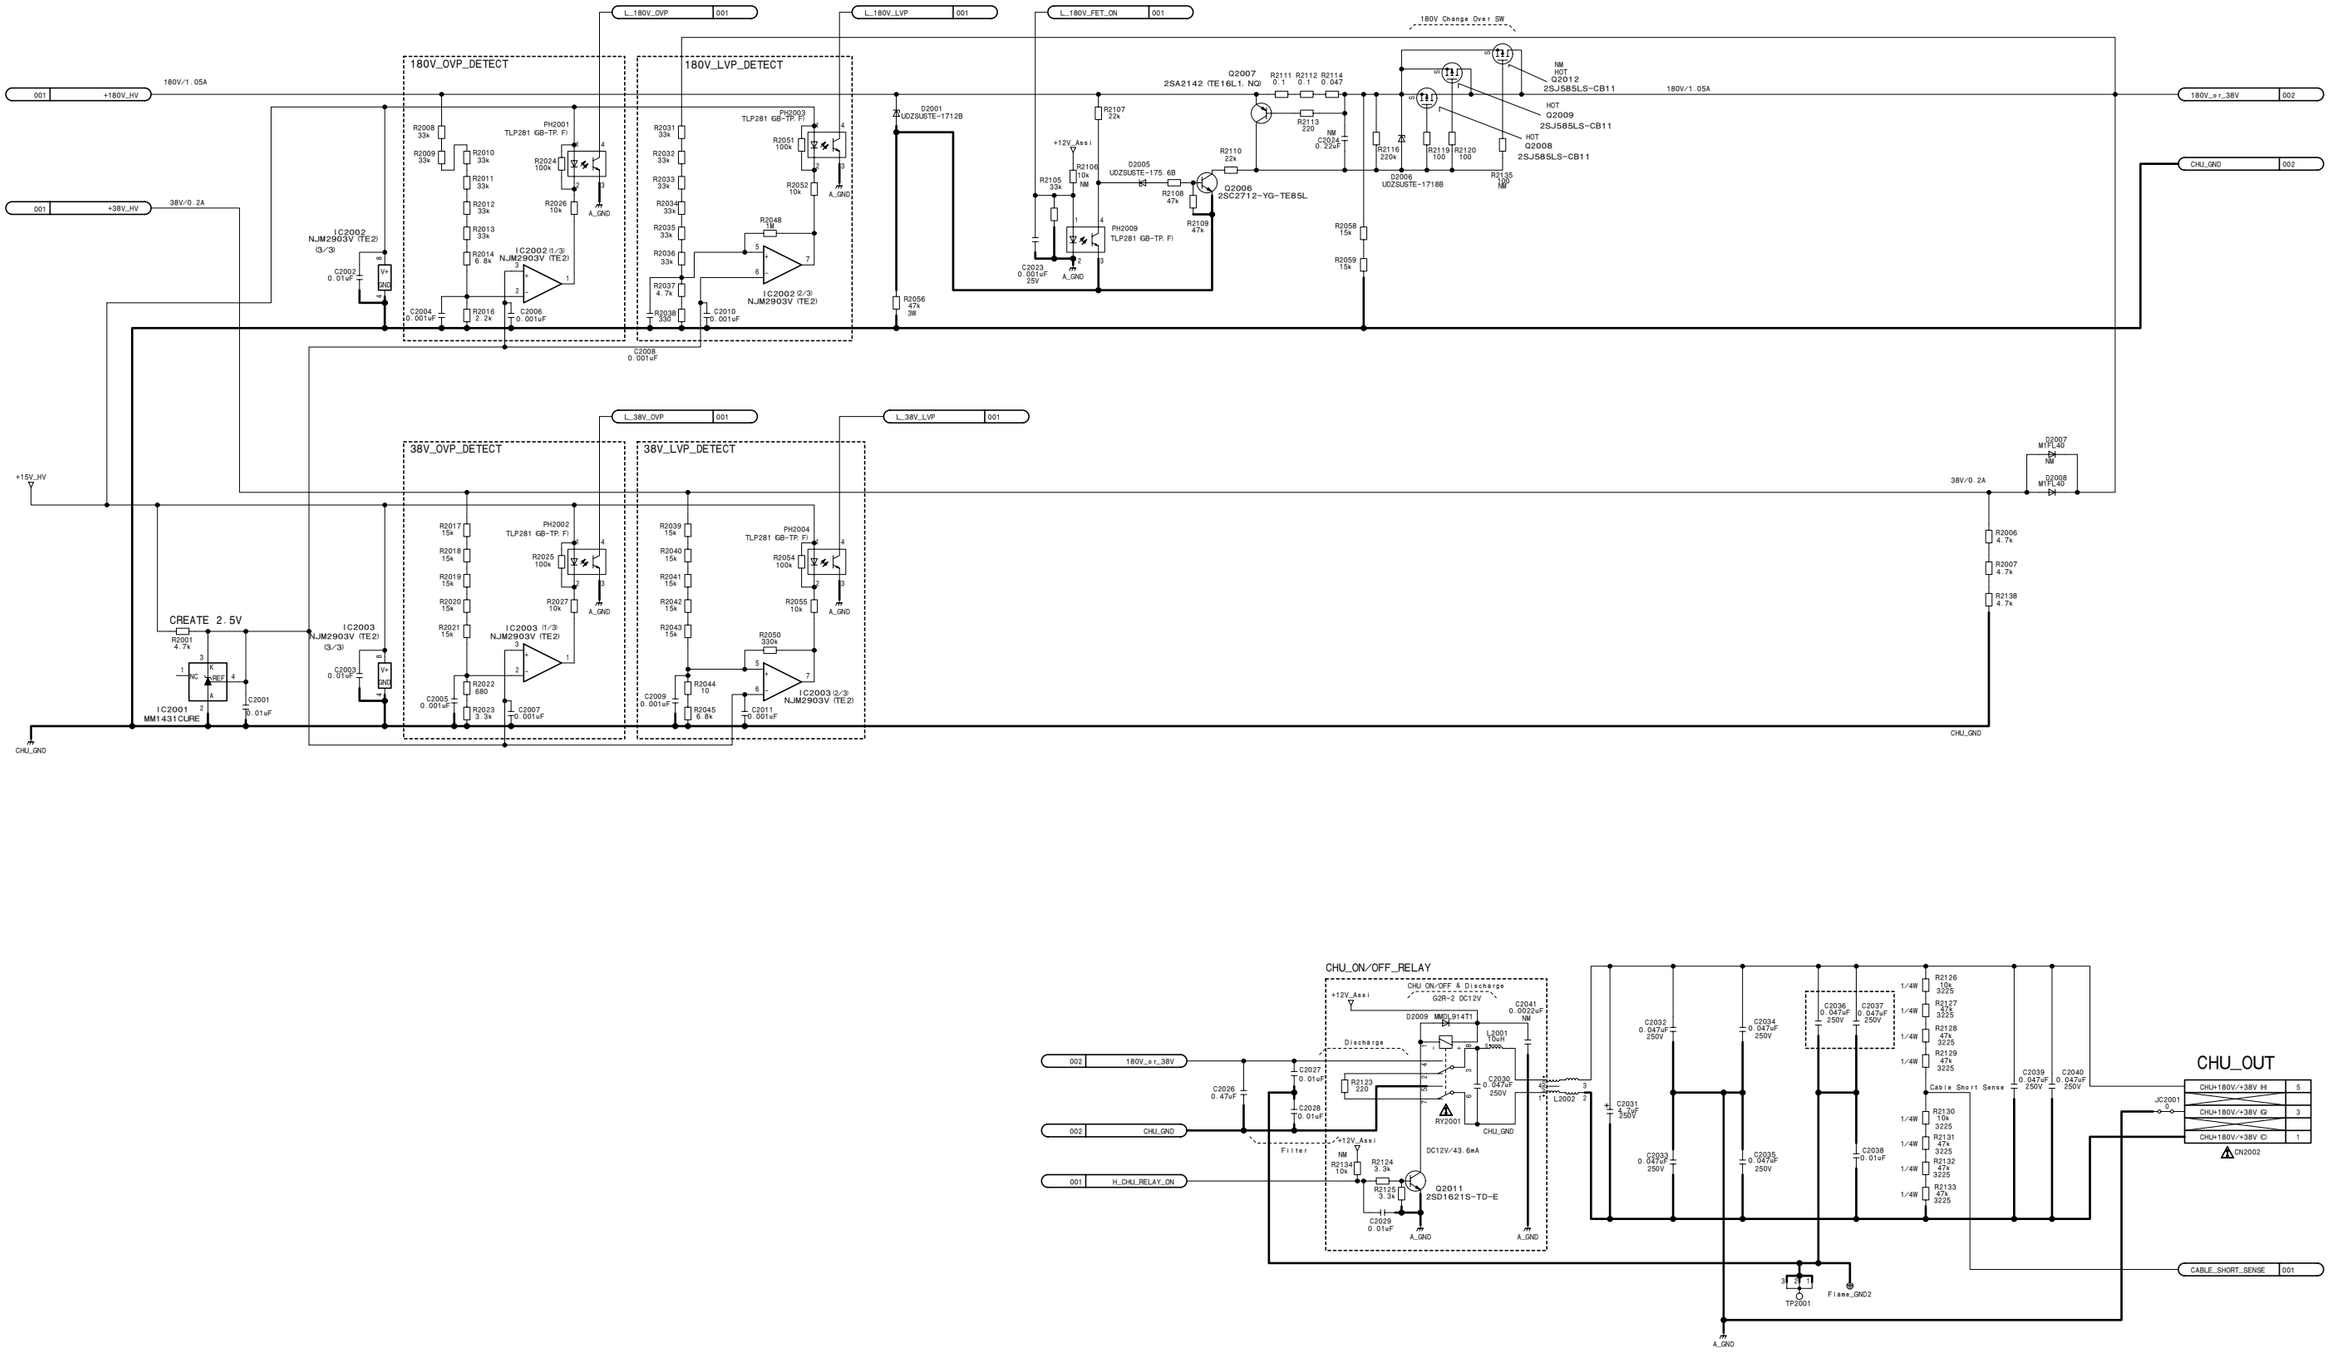

PS-778 (2/2)
BOARD NO. 1-881-962-11
CAX-183-D00_PS-778_11S_2

7-86

PS-780 (1/2)
SUFFIX: -12

PS-780 (1/2)
SUFFIX: -12

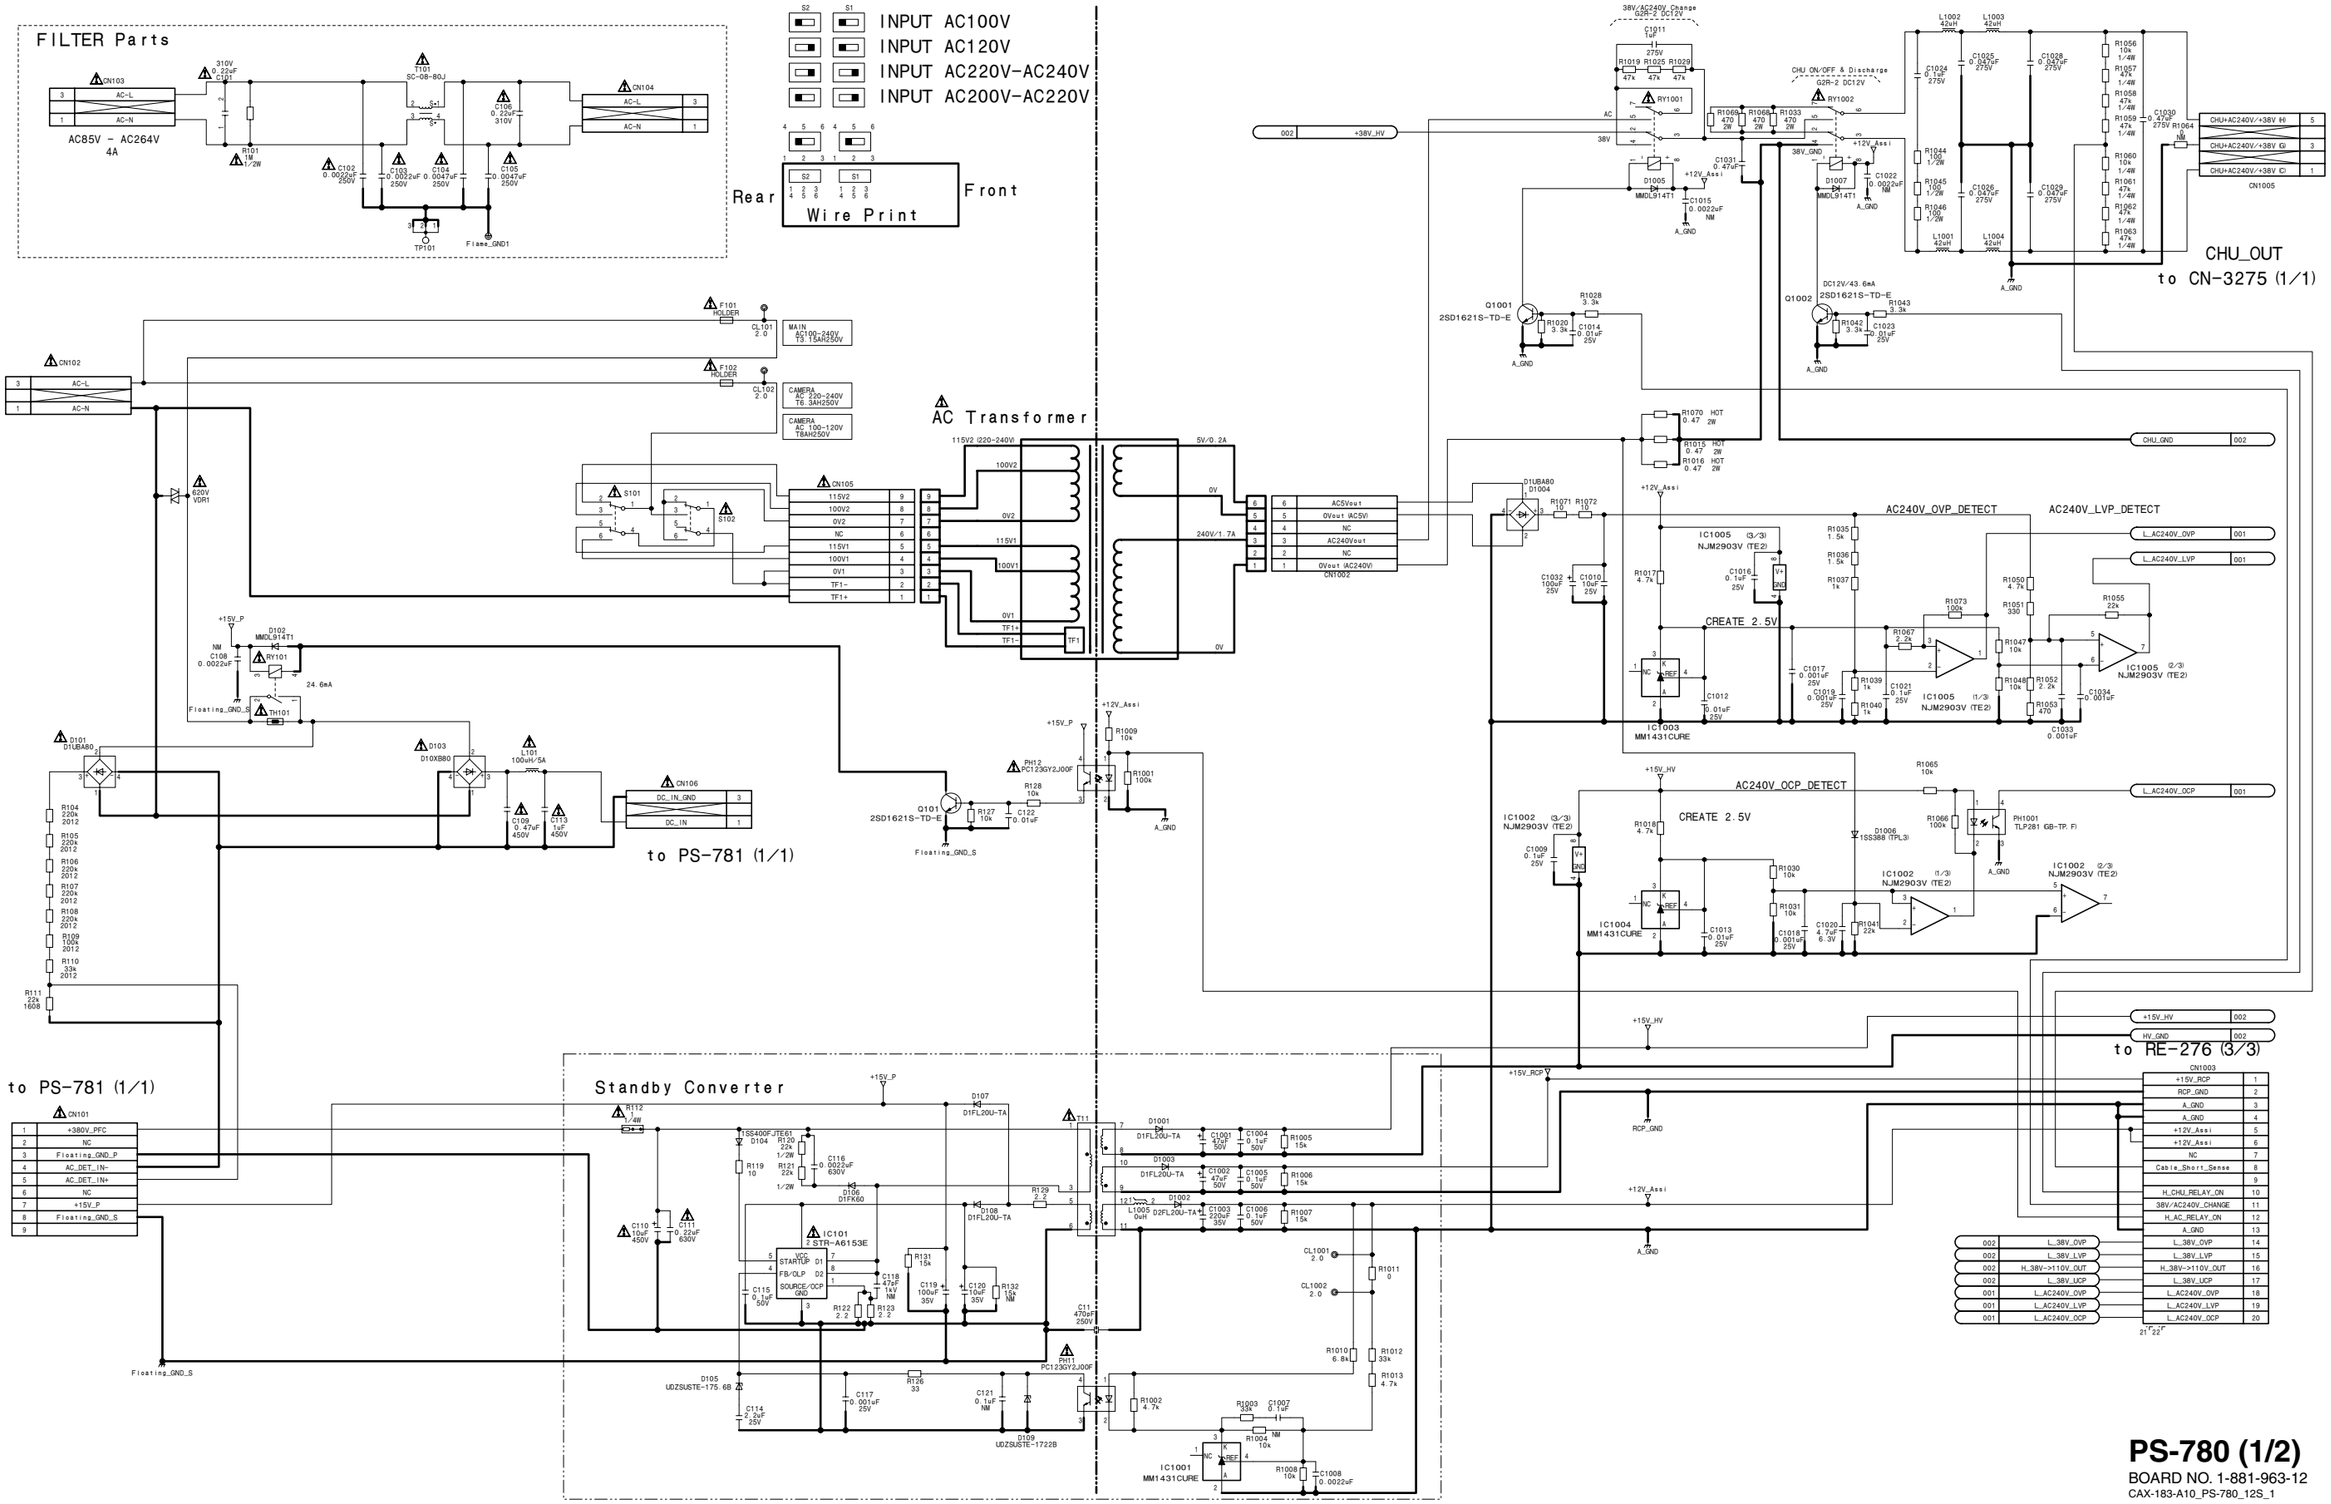

PS-780 (1/2)
BOARD NO. 1-881-963-12
CAX-183-A10_PS-780_12S_1

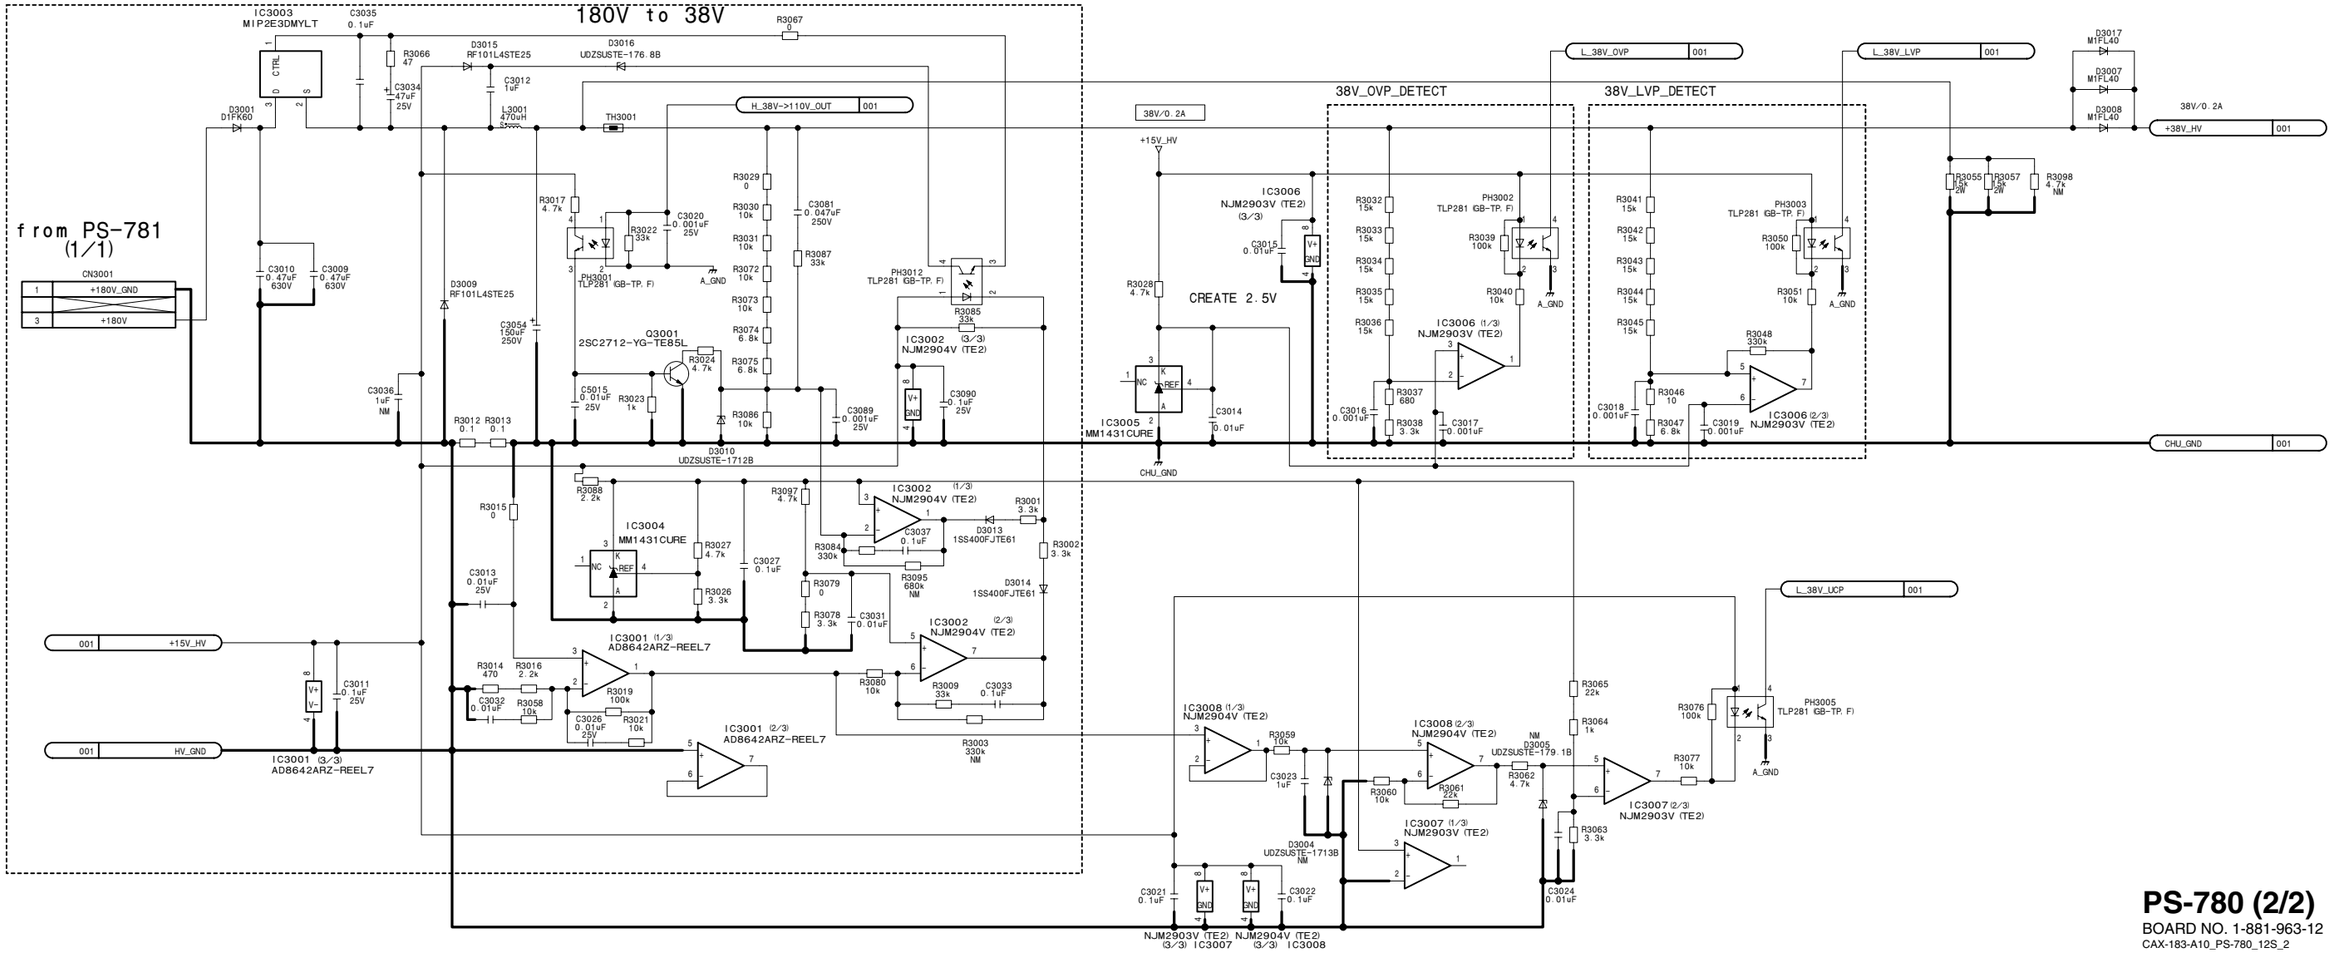

PS-780 (2/2)
BOARD NO. 1-881-963-12
CAX-183-A10_PS-780_12S_2

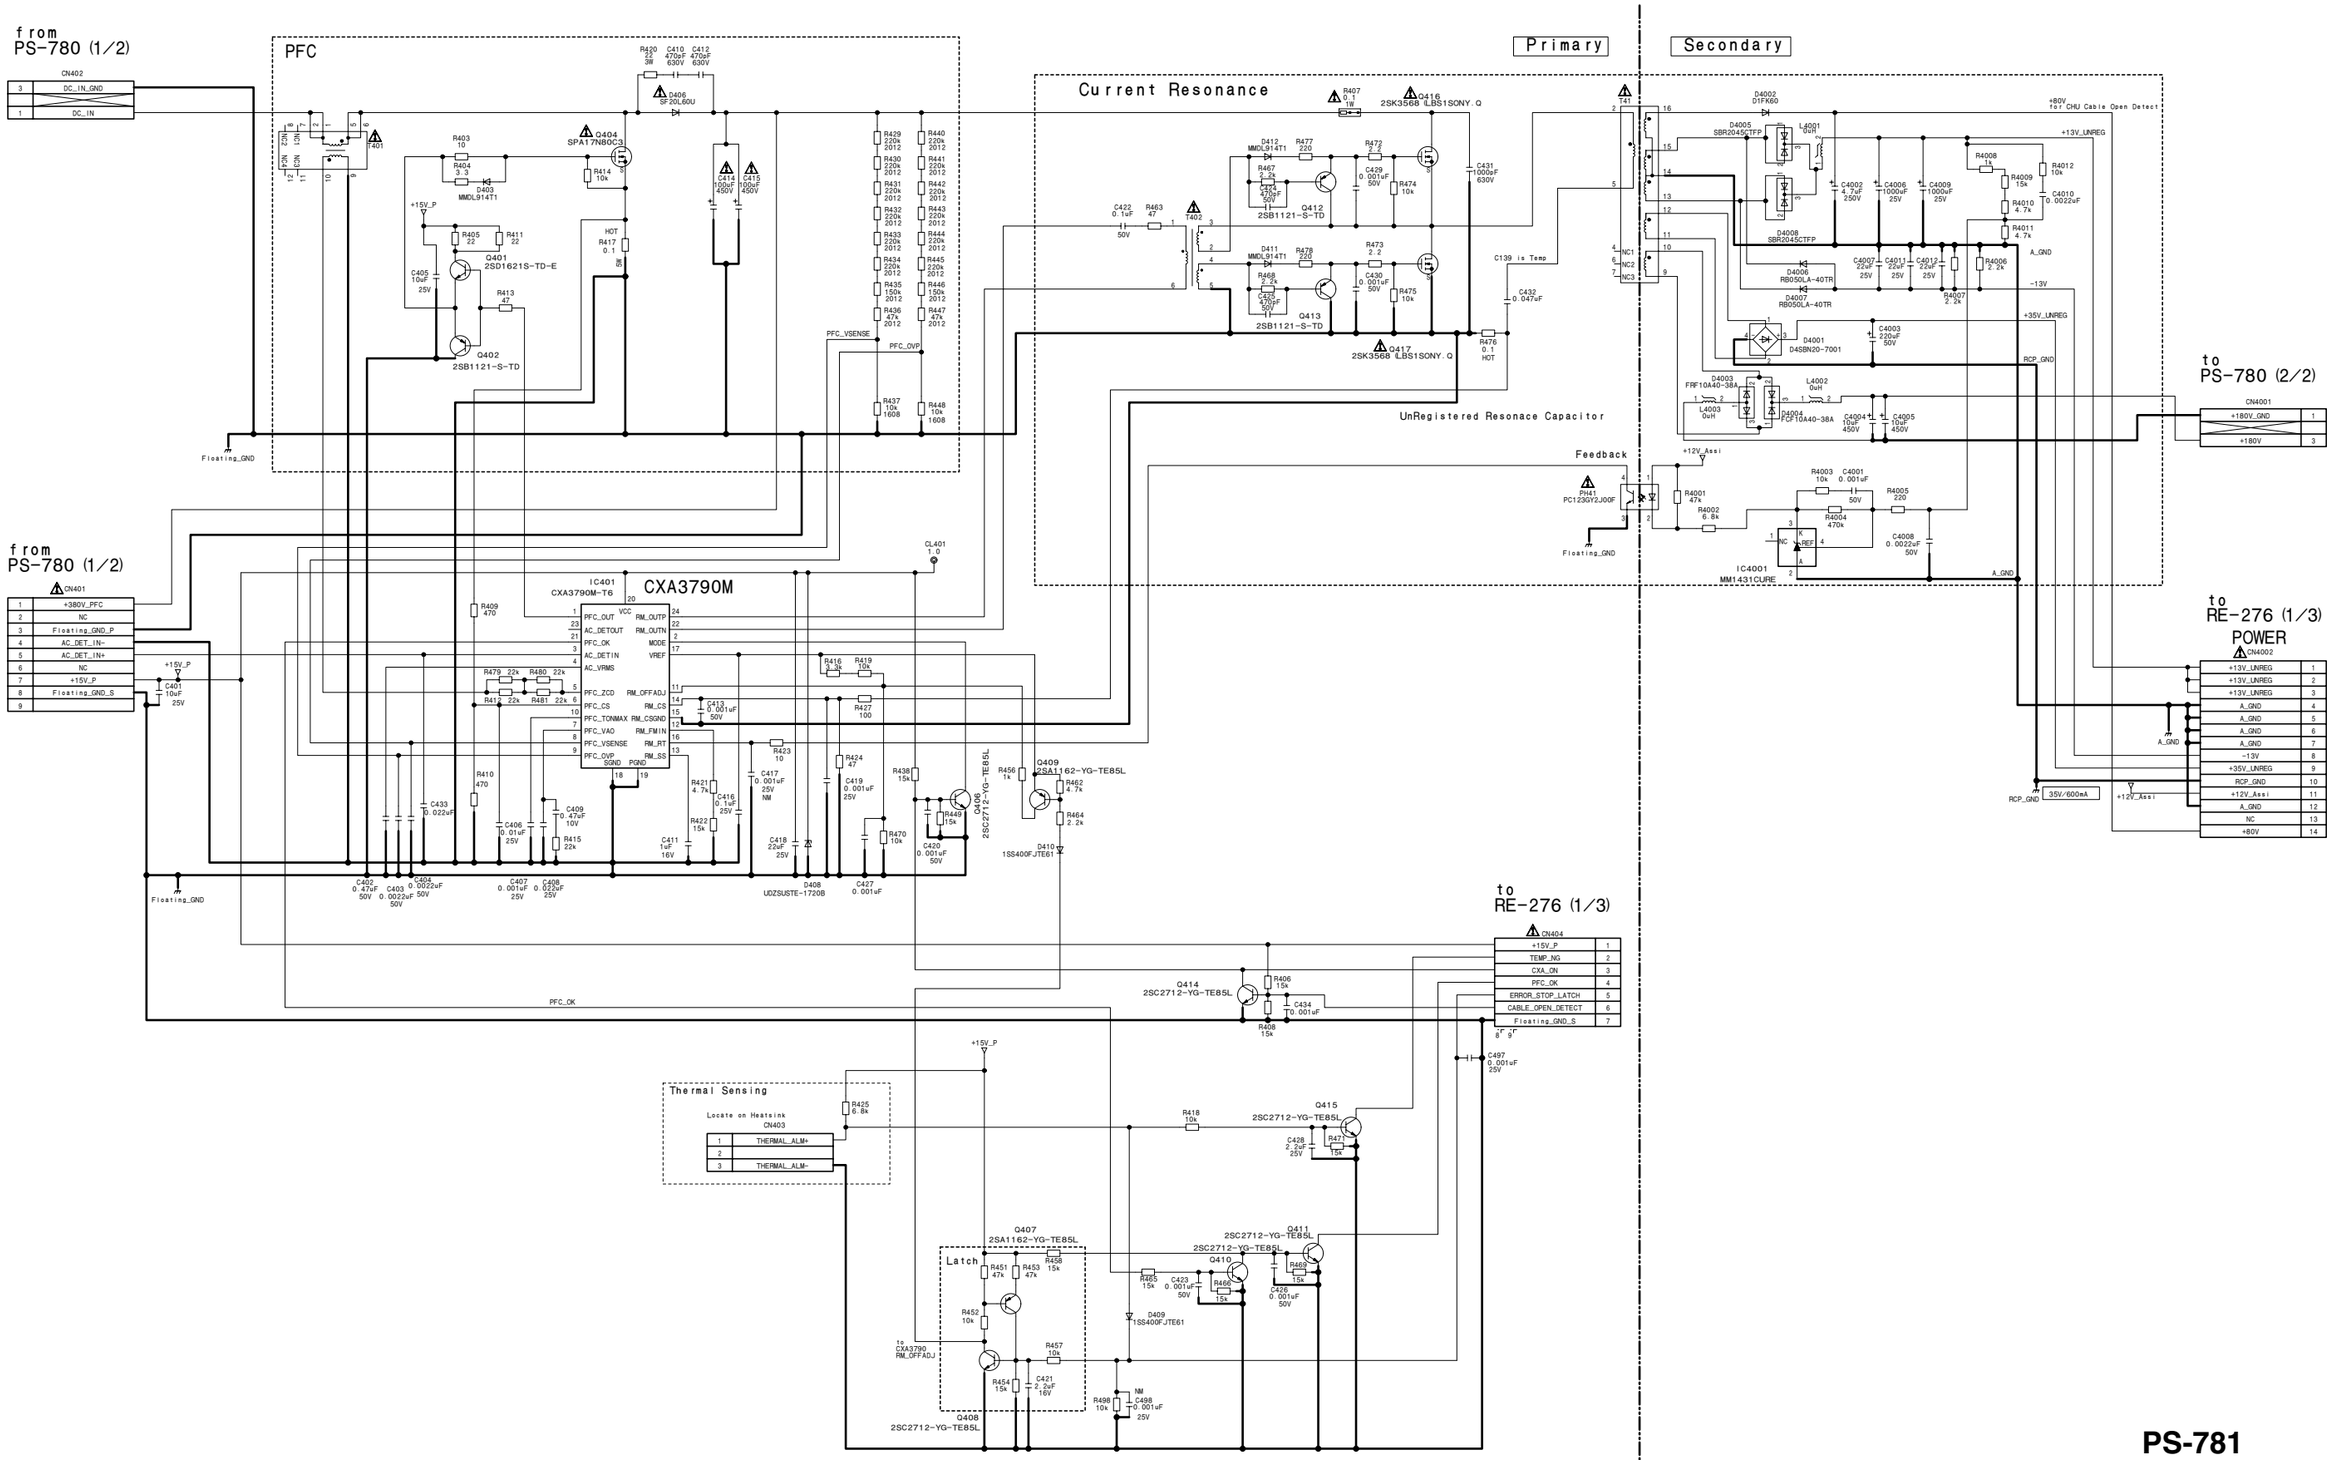

PS-781
BOARD NO. 1-881-964-11
CAX-183-A10_PS-781_11S_1

RE-274 (1/3) **SUFFIX: -11**

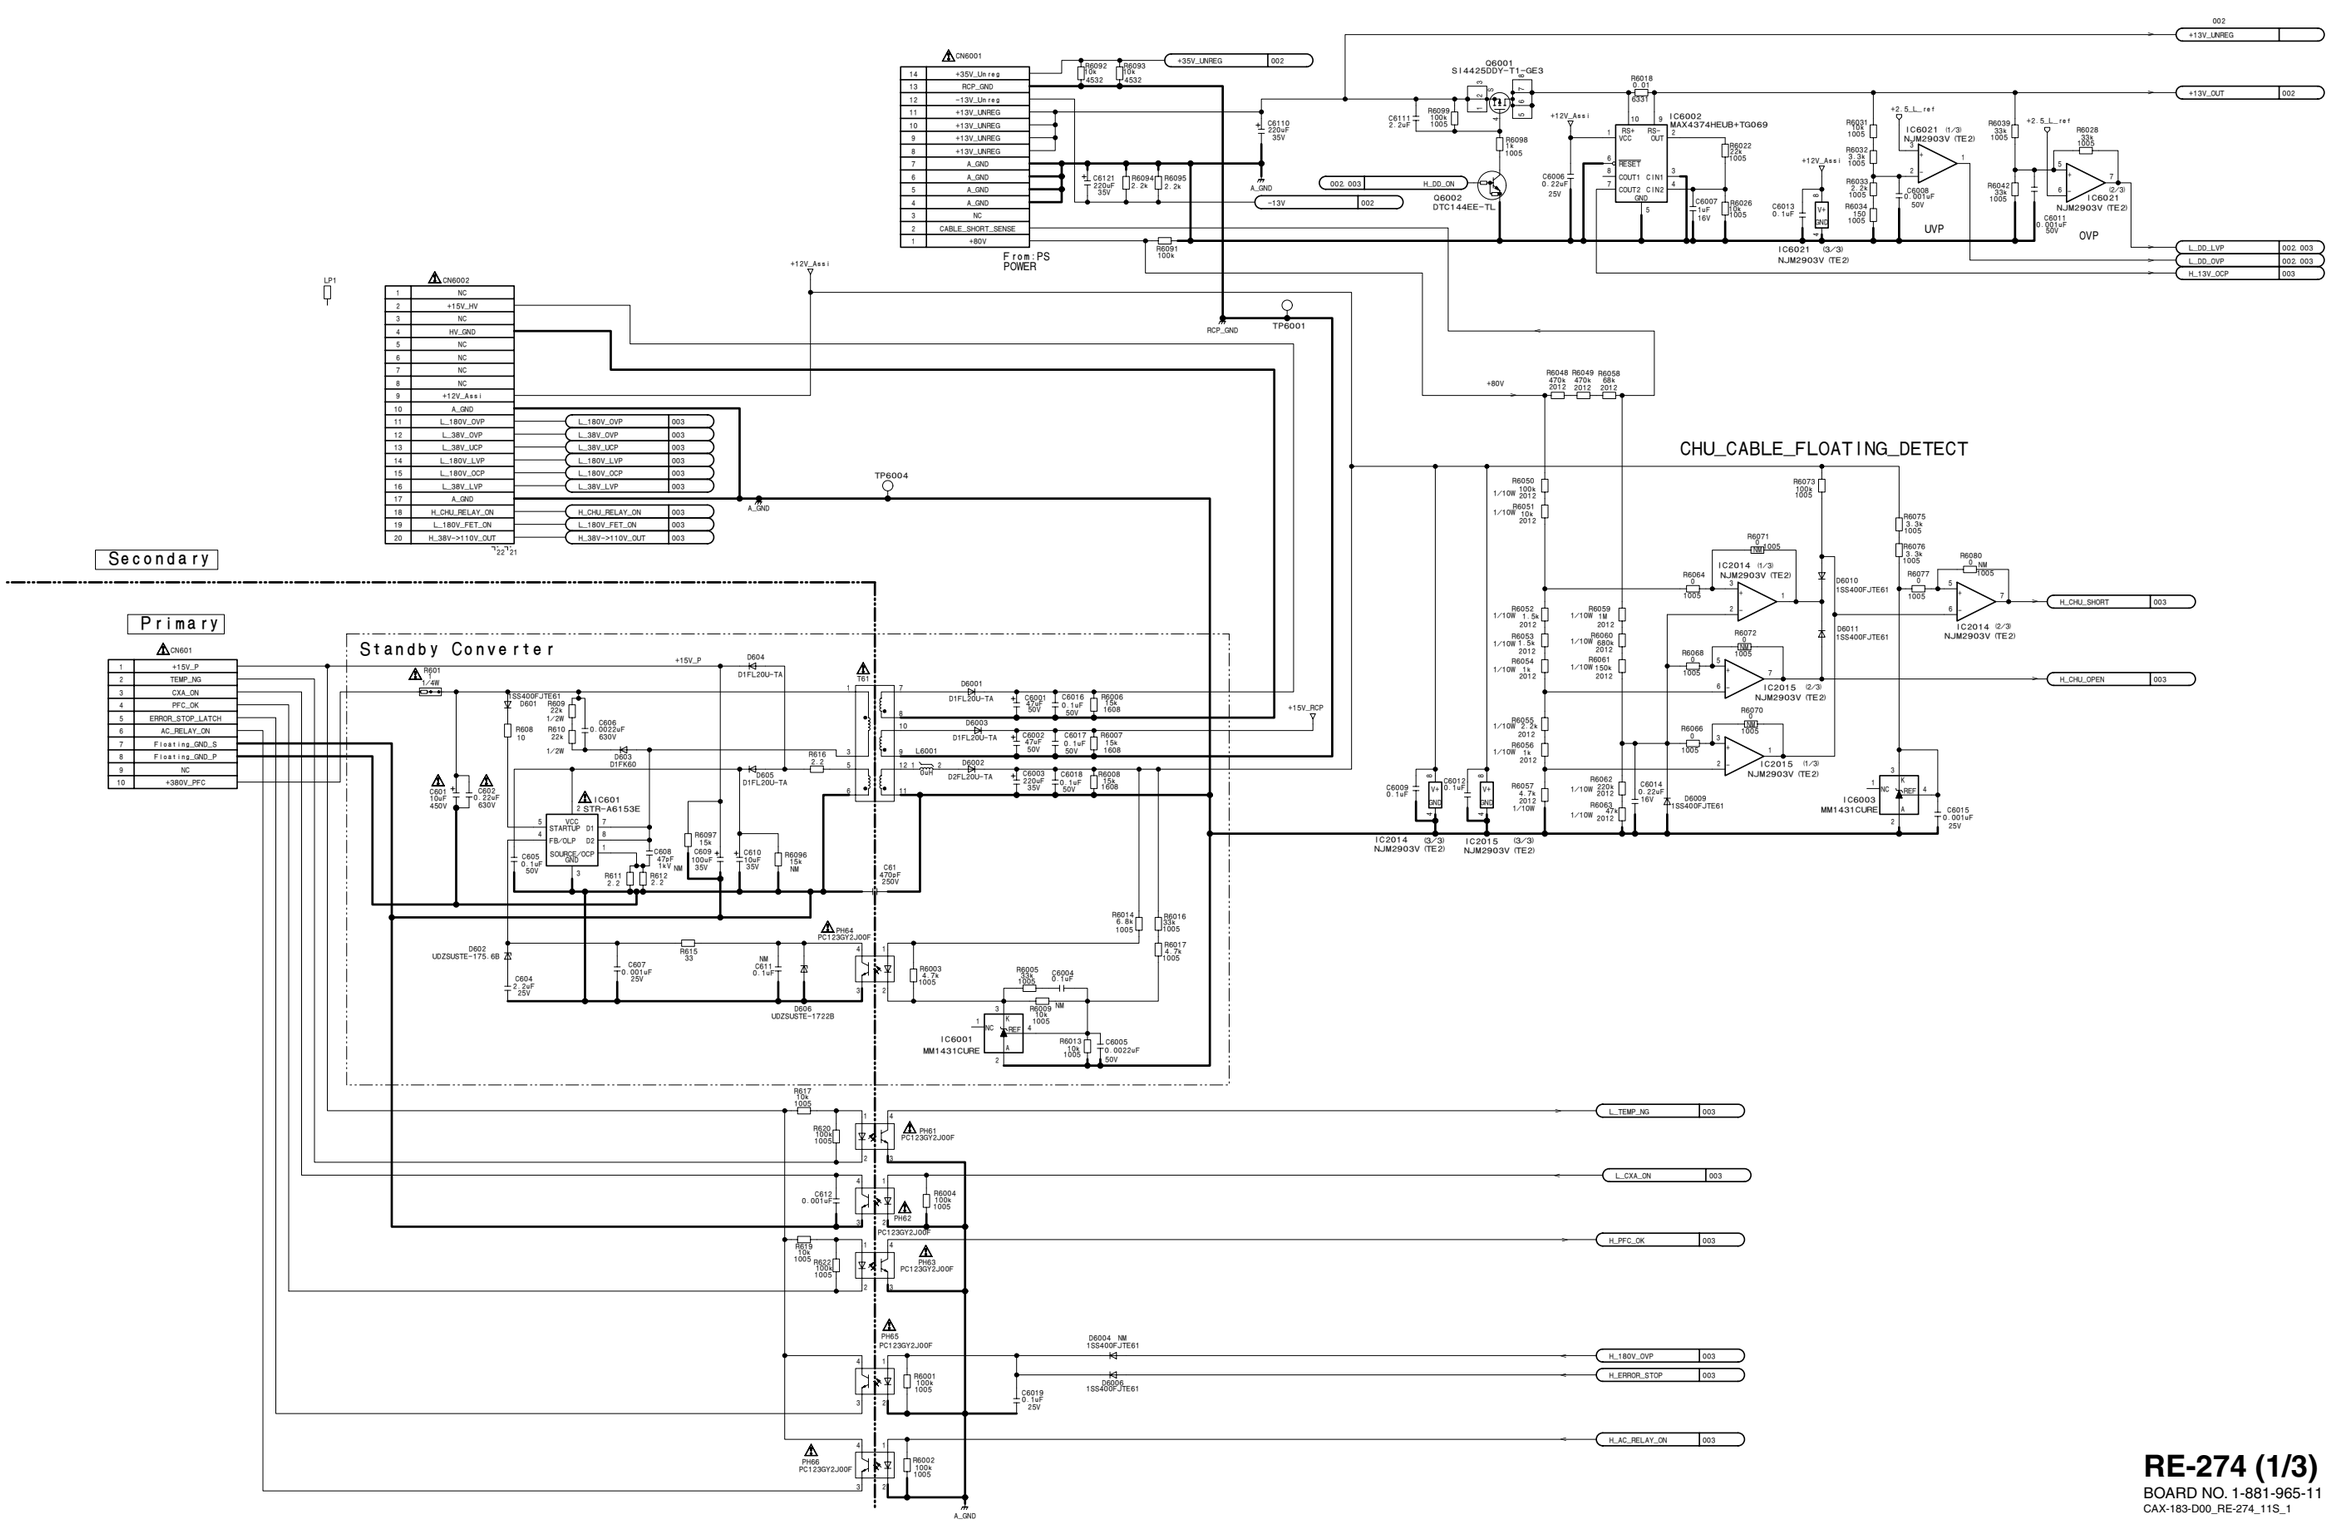

RE-274 (1/3)
BOARD NO. 1-881-965-11
CAX-183-D00_RE-274_11S_1

RE-274 (2/3)
SUFFIX: -11

RE-274 (2/3)
SUFFIX: -11

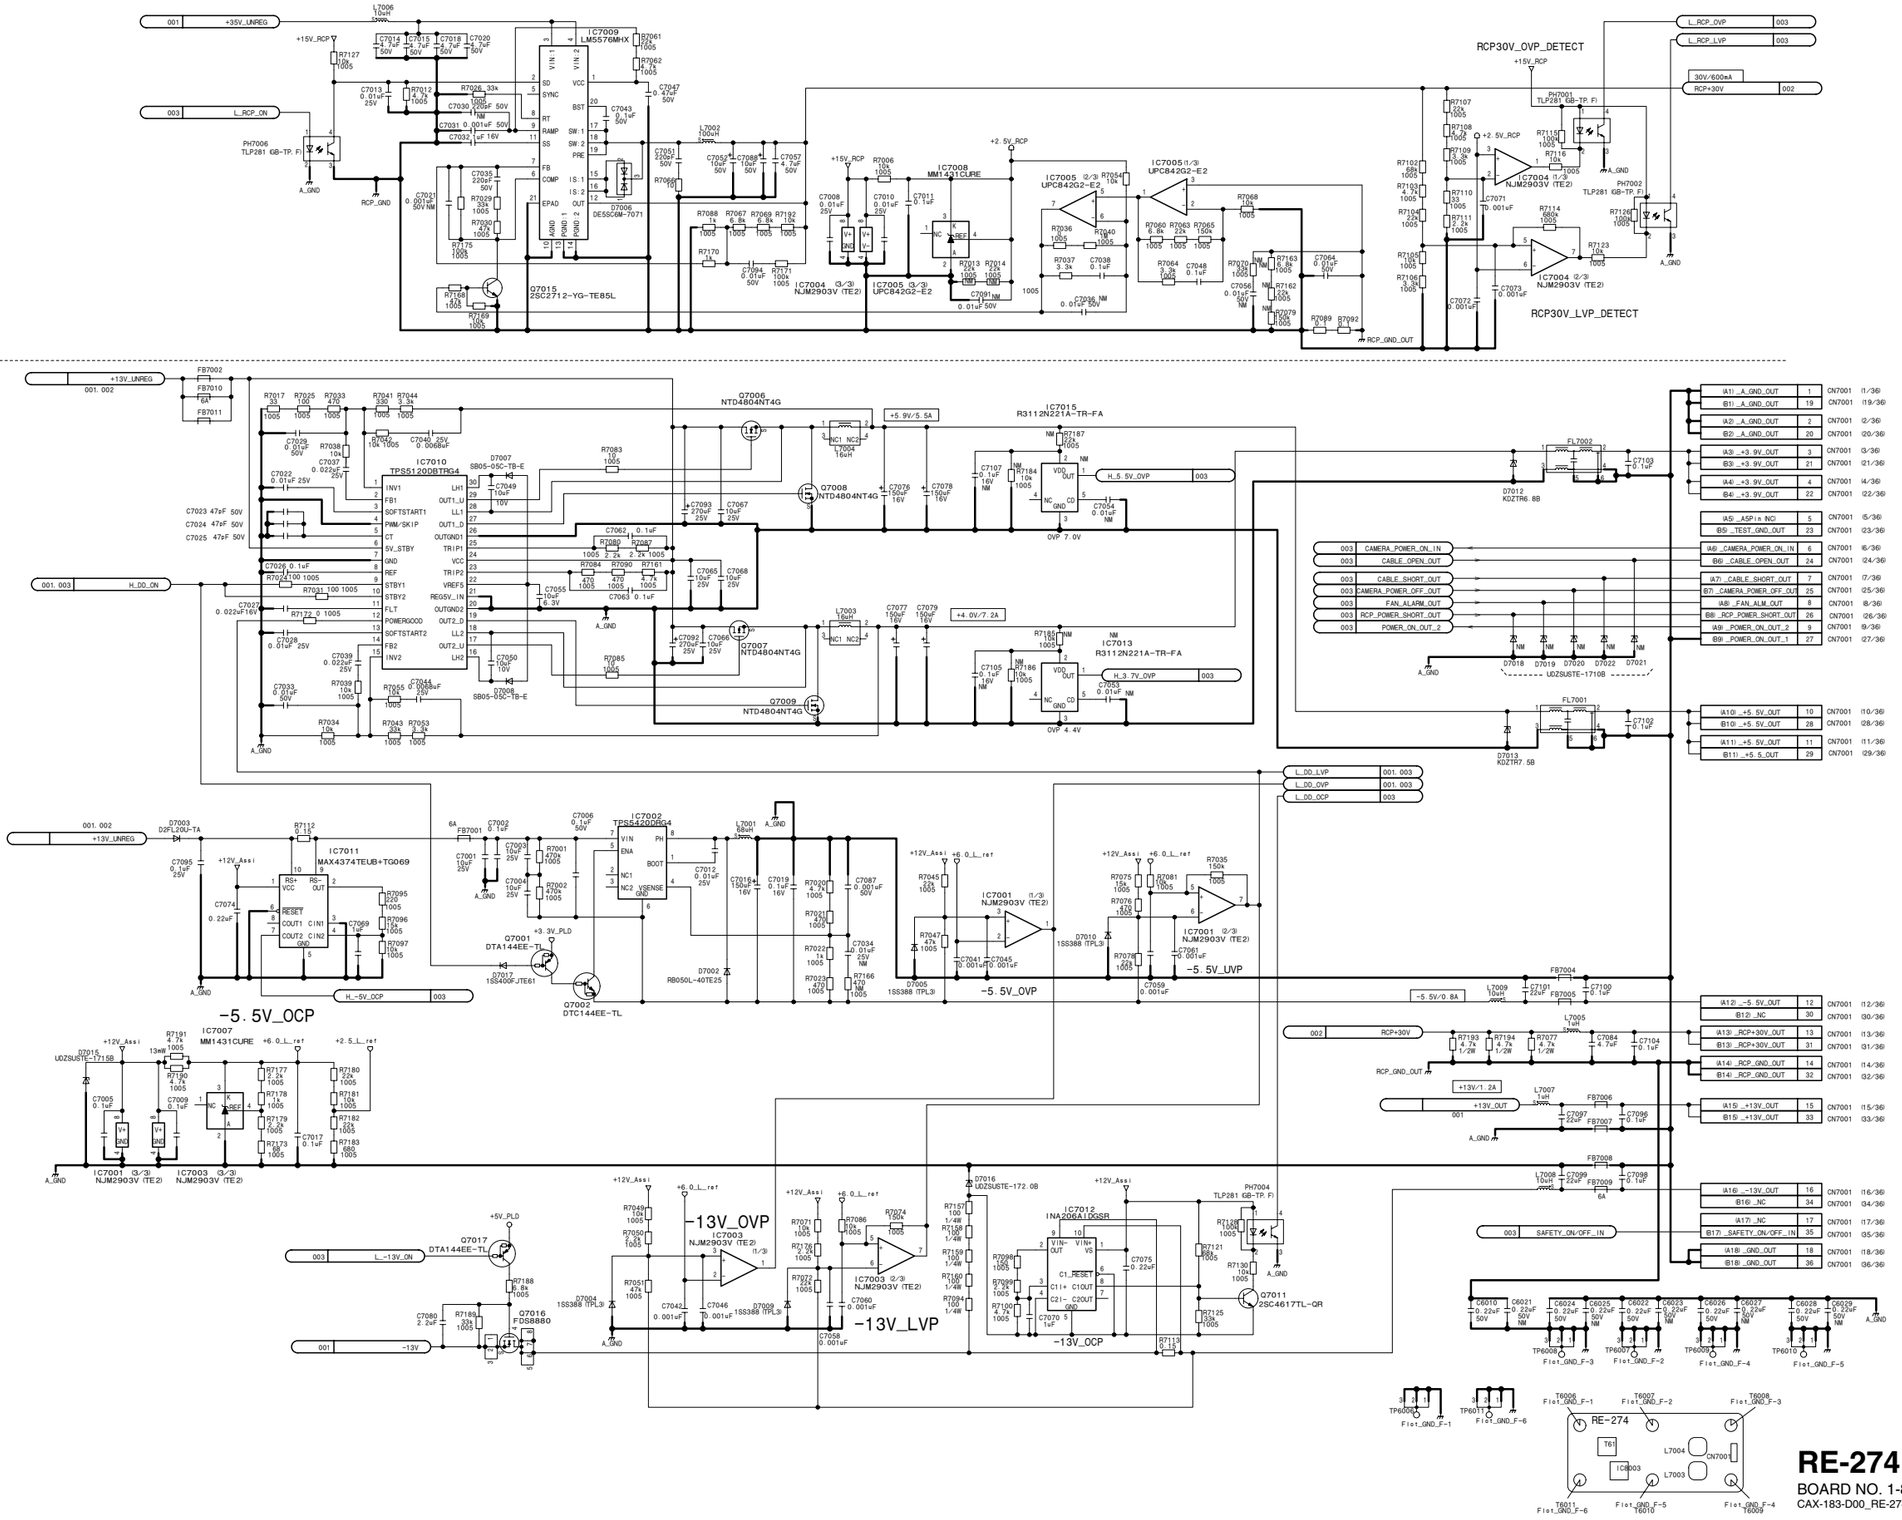

RE-274 (3/3) **SUFFIX: -11**

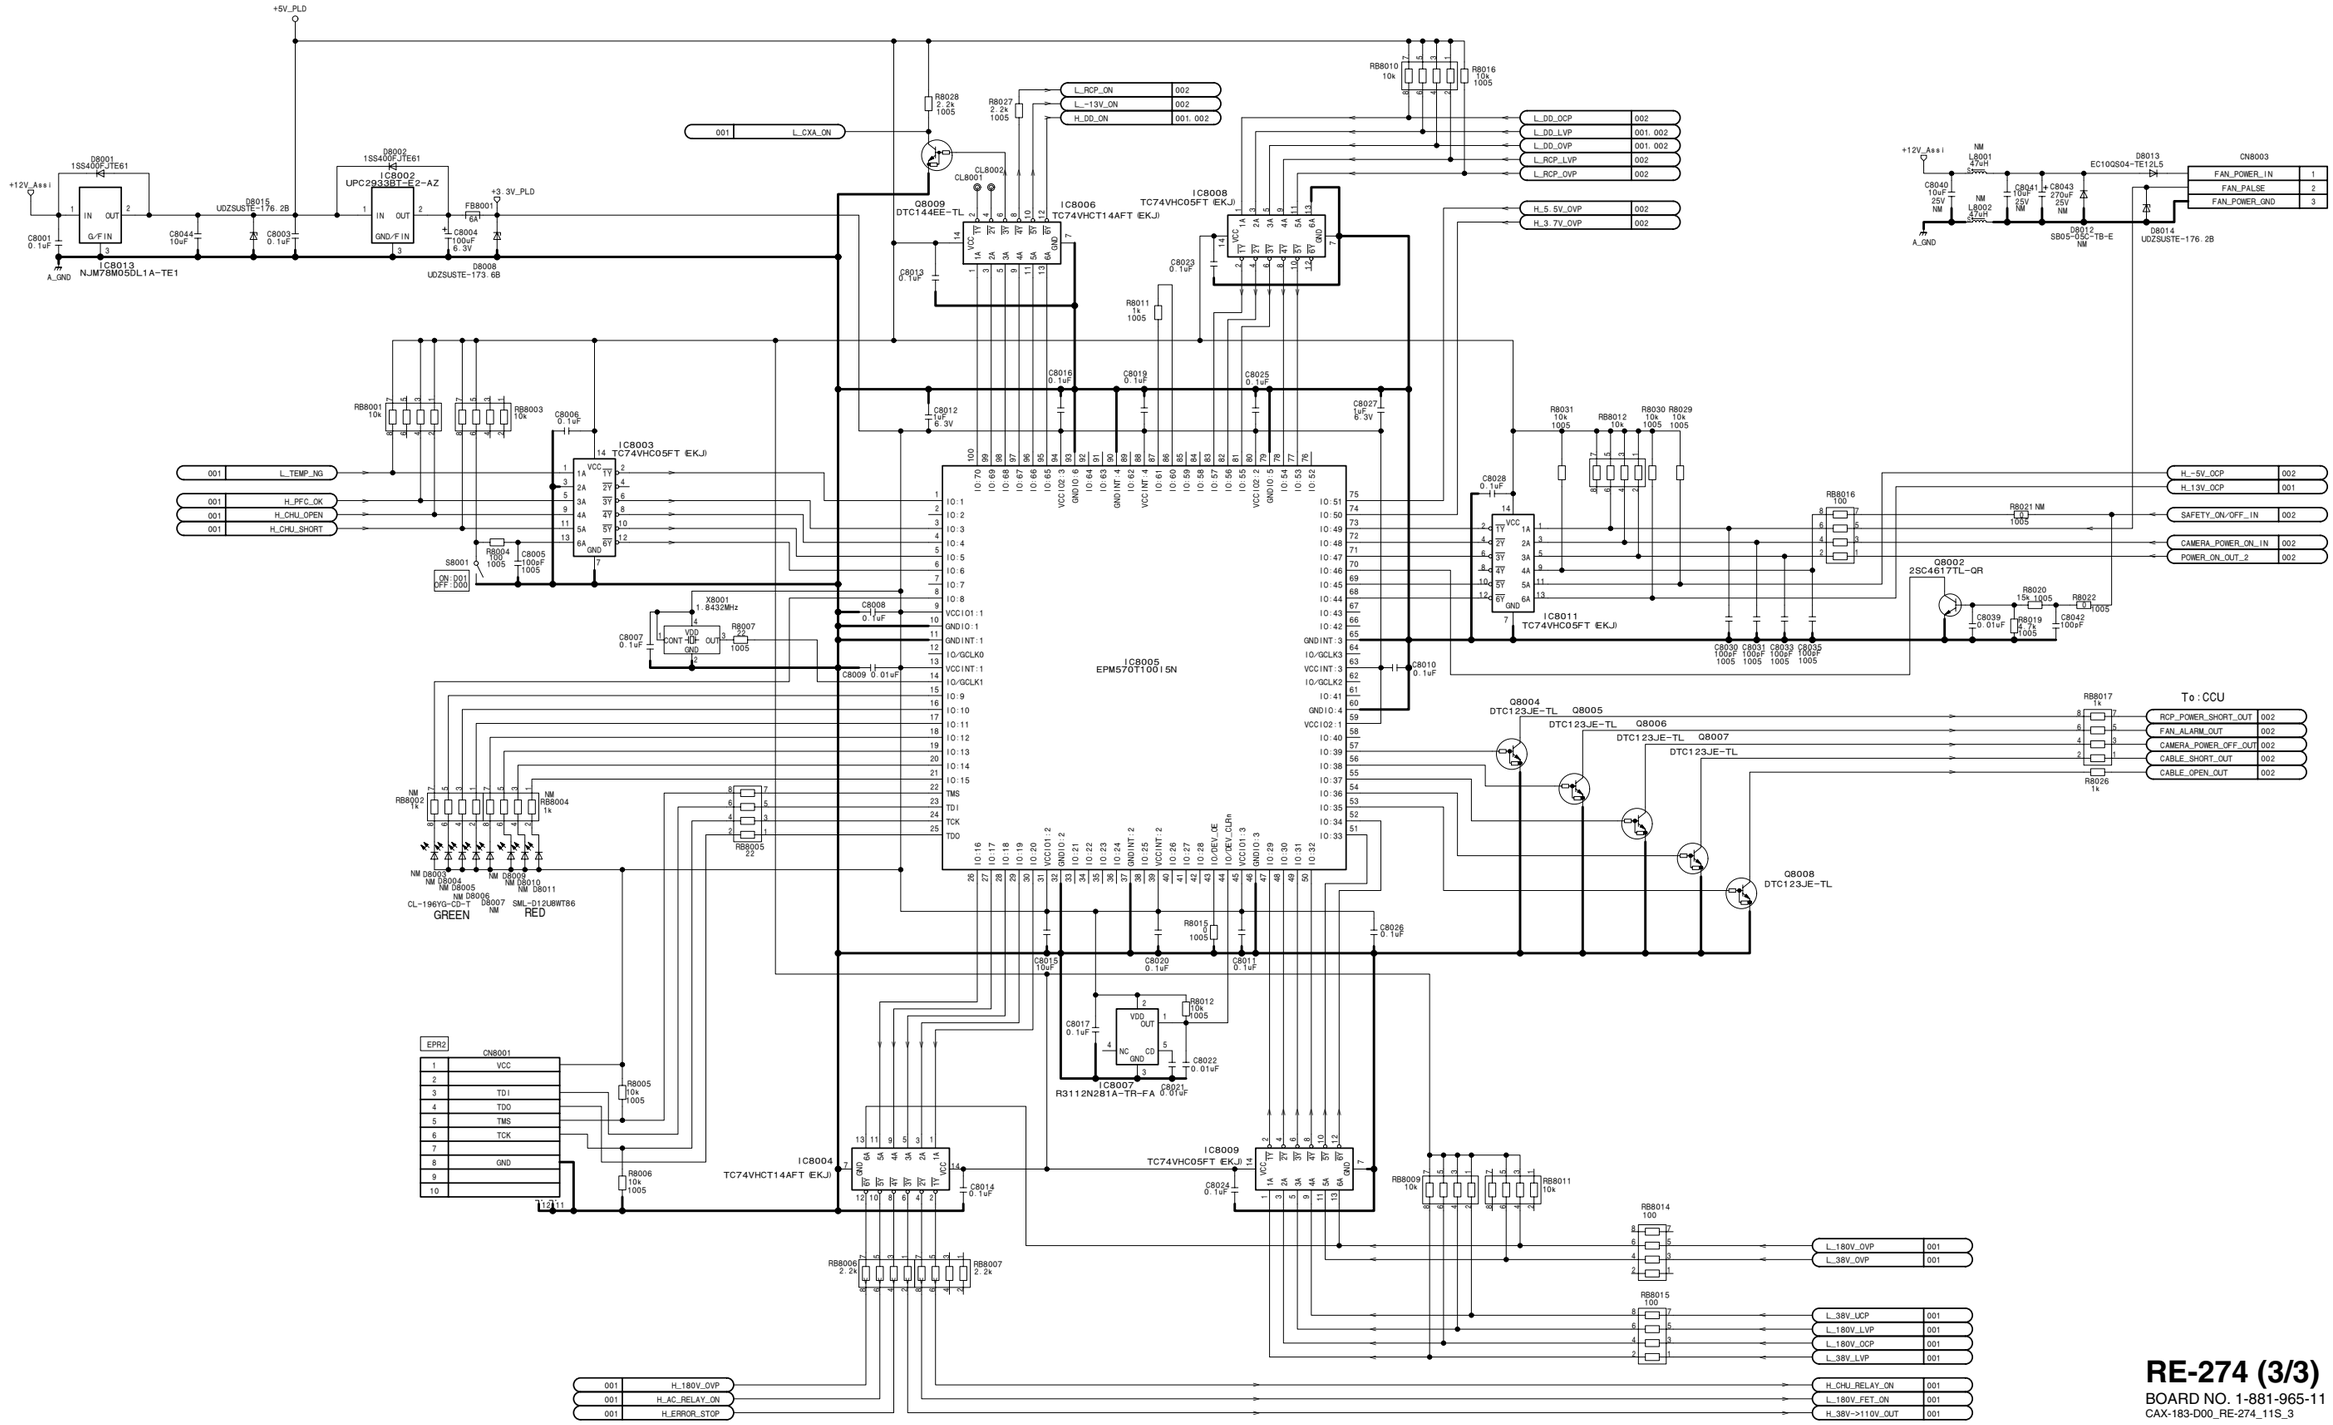

RE-274 (3/3)
BOARD NO. 1-881-965-11
CAX-183-D00_RE-274_11S_3

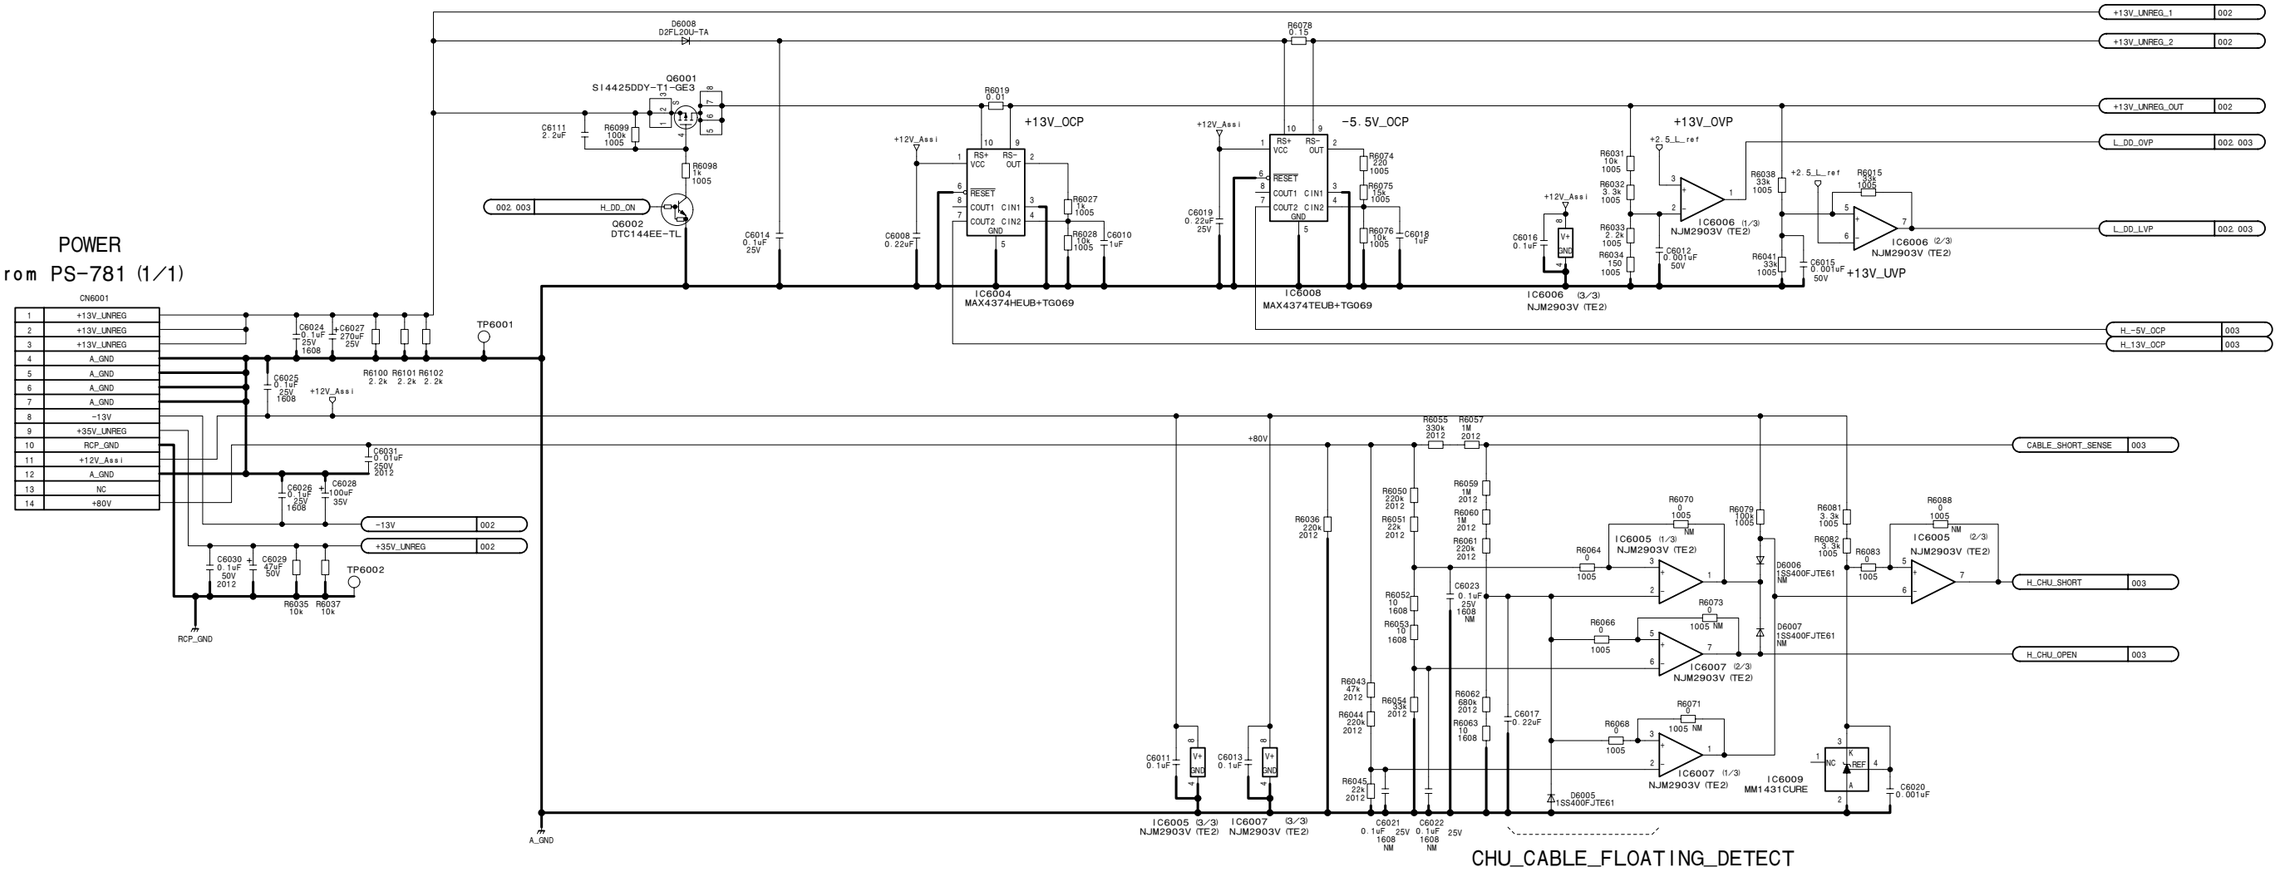

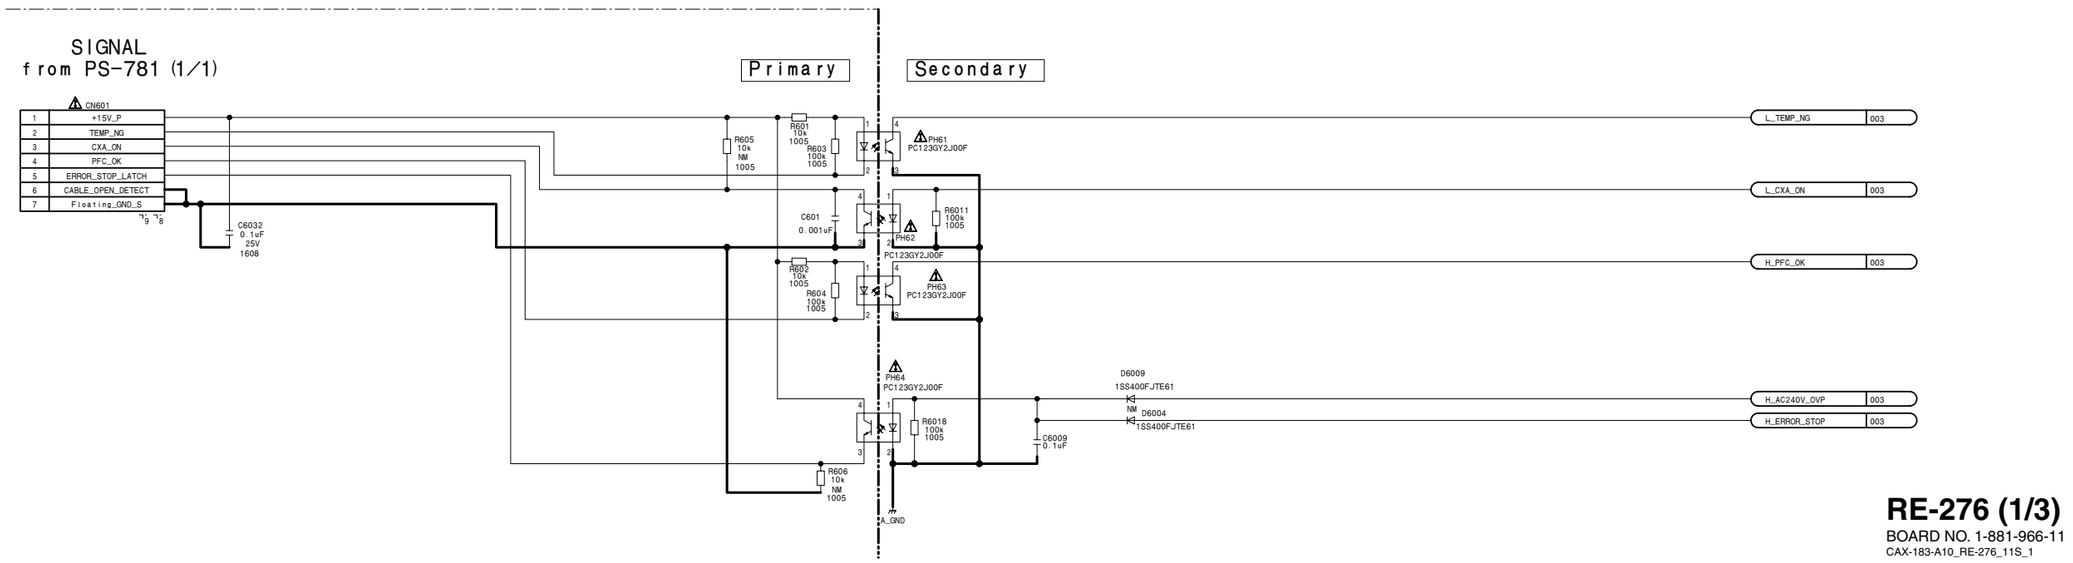

RE-276 (1/3)
BOARD NO. 1-881-966-11
CAX-183-A10_RE-276_11S_1

RE-276 (2/3)
SUFFIX: -11

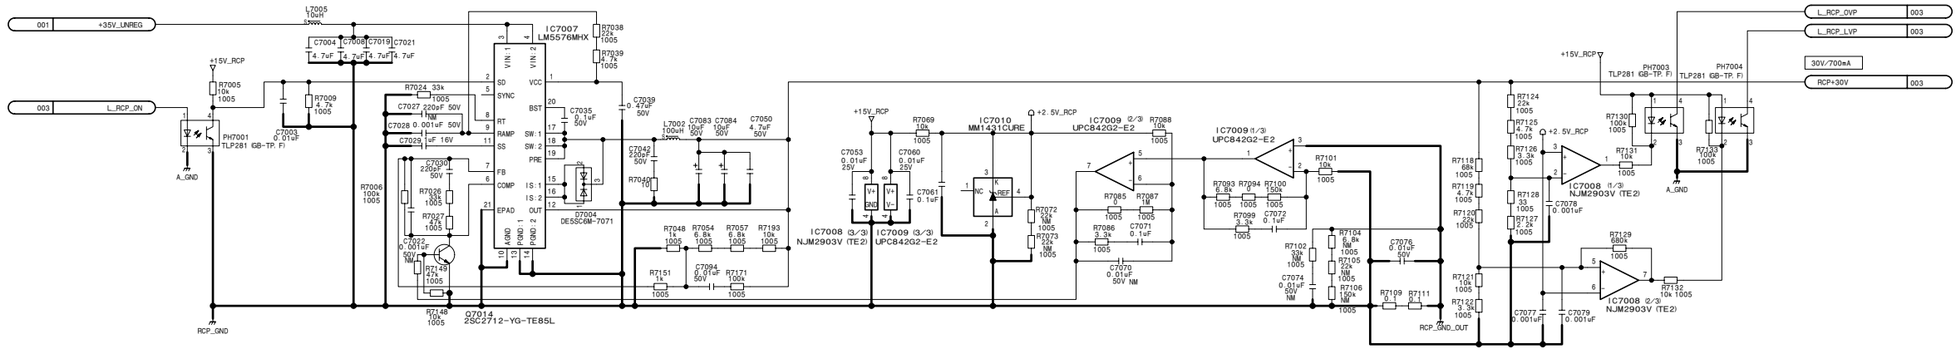

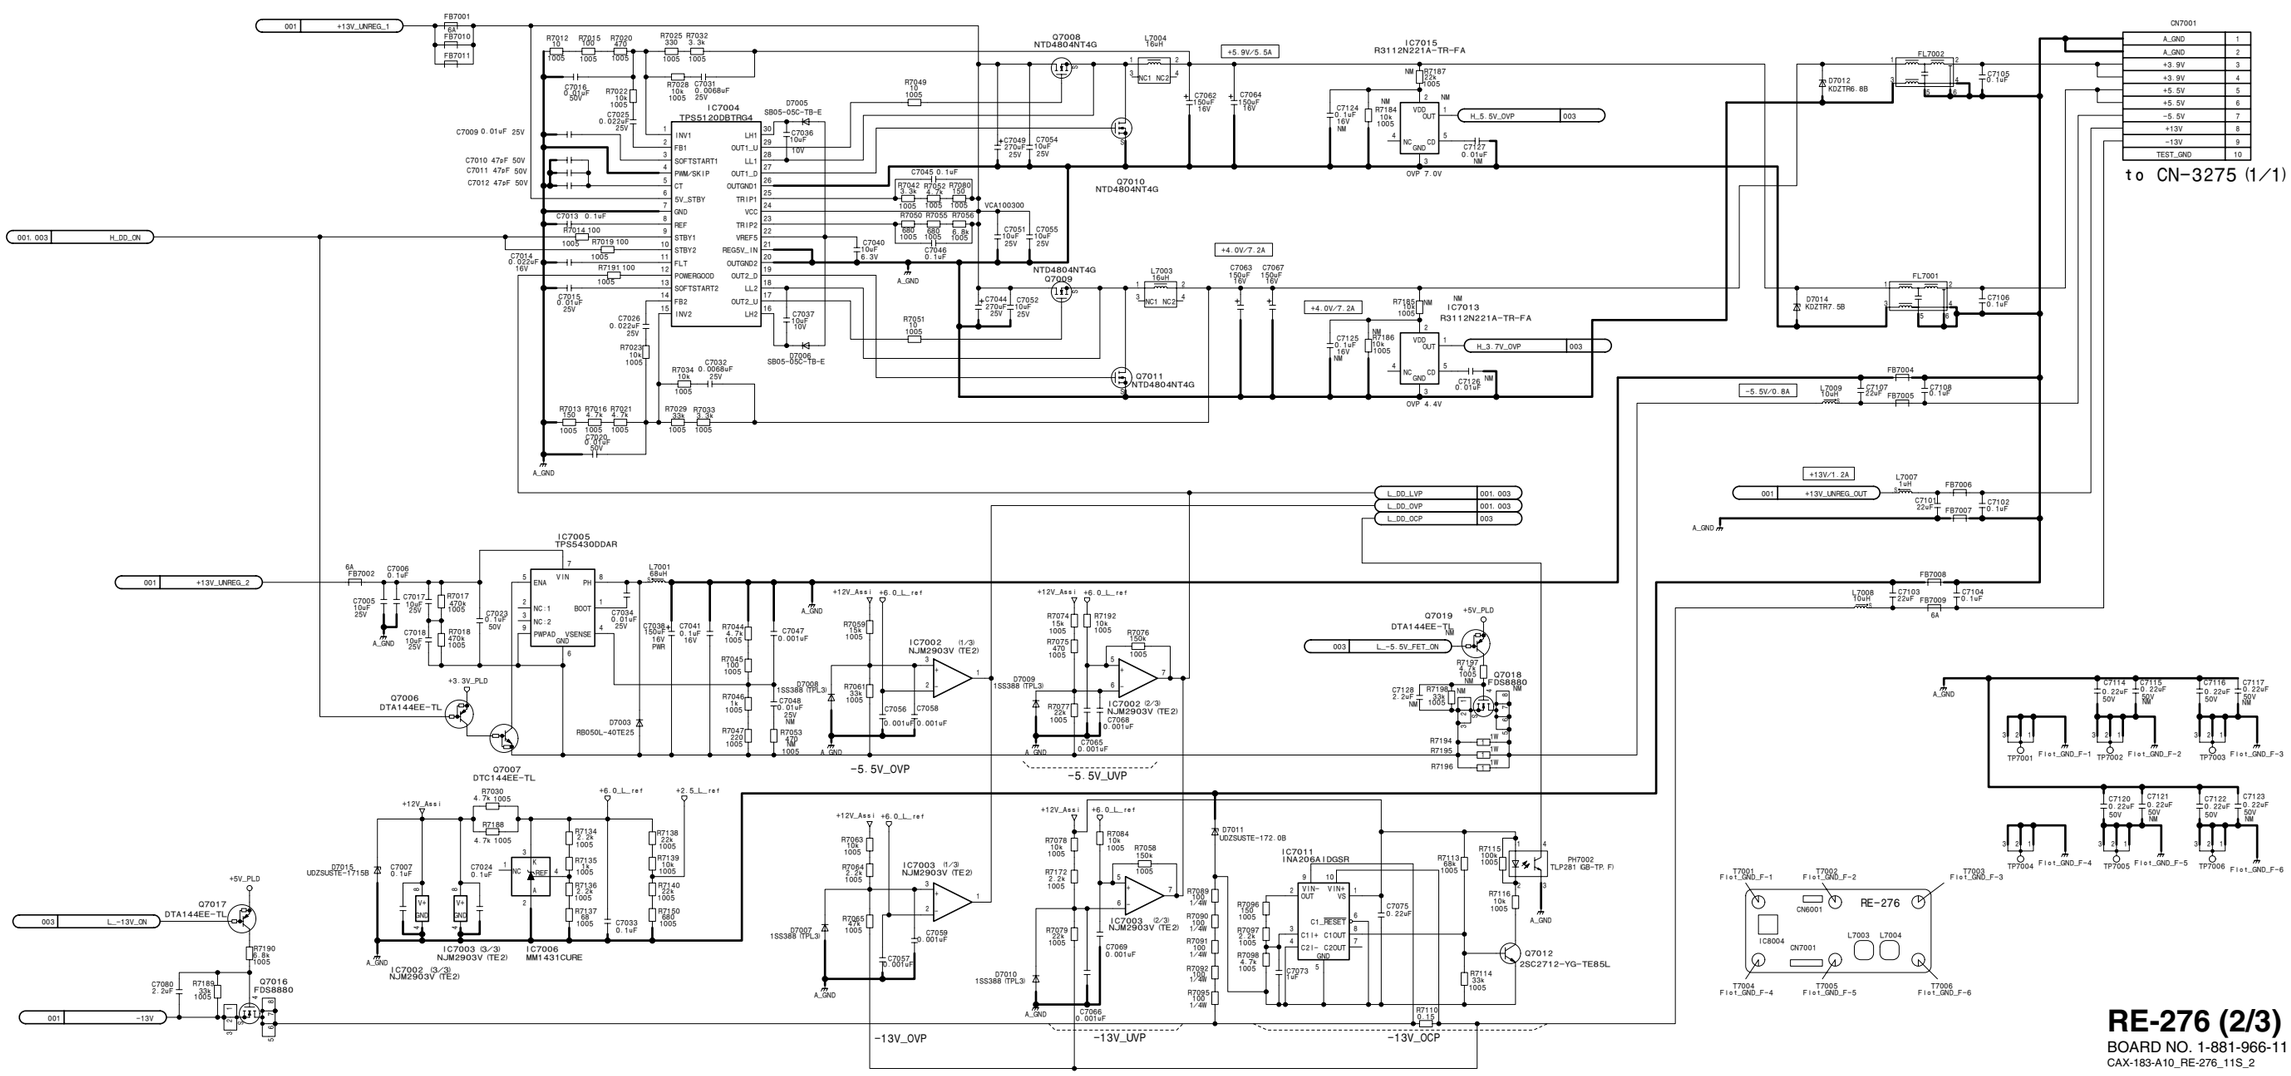

RE-276 (2/3)
BOARD NO. 1-881-966-11
CAX-183-A10_RE-276_11S_2

RE-276 (3/3) **SUFFIX: -11**

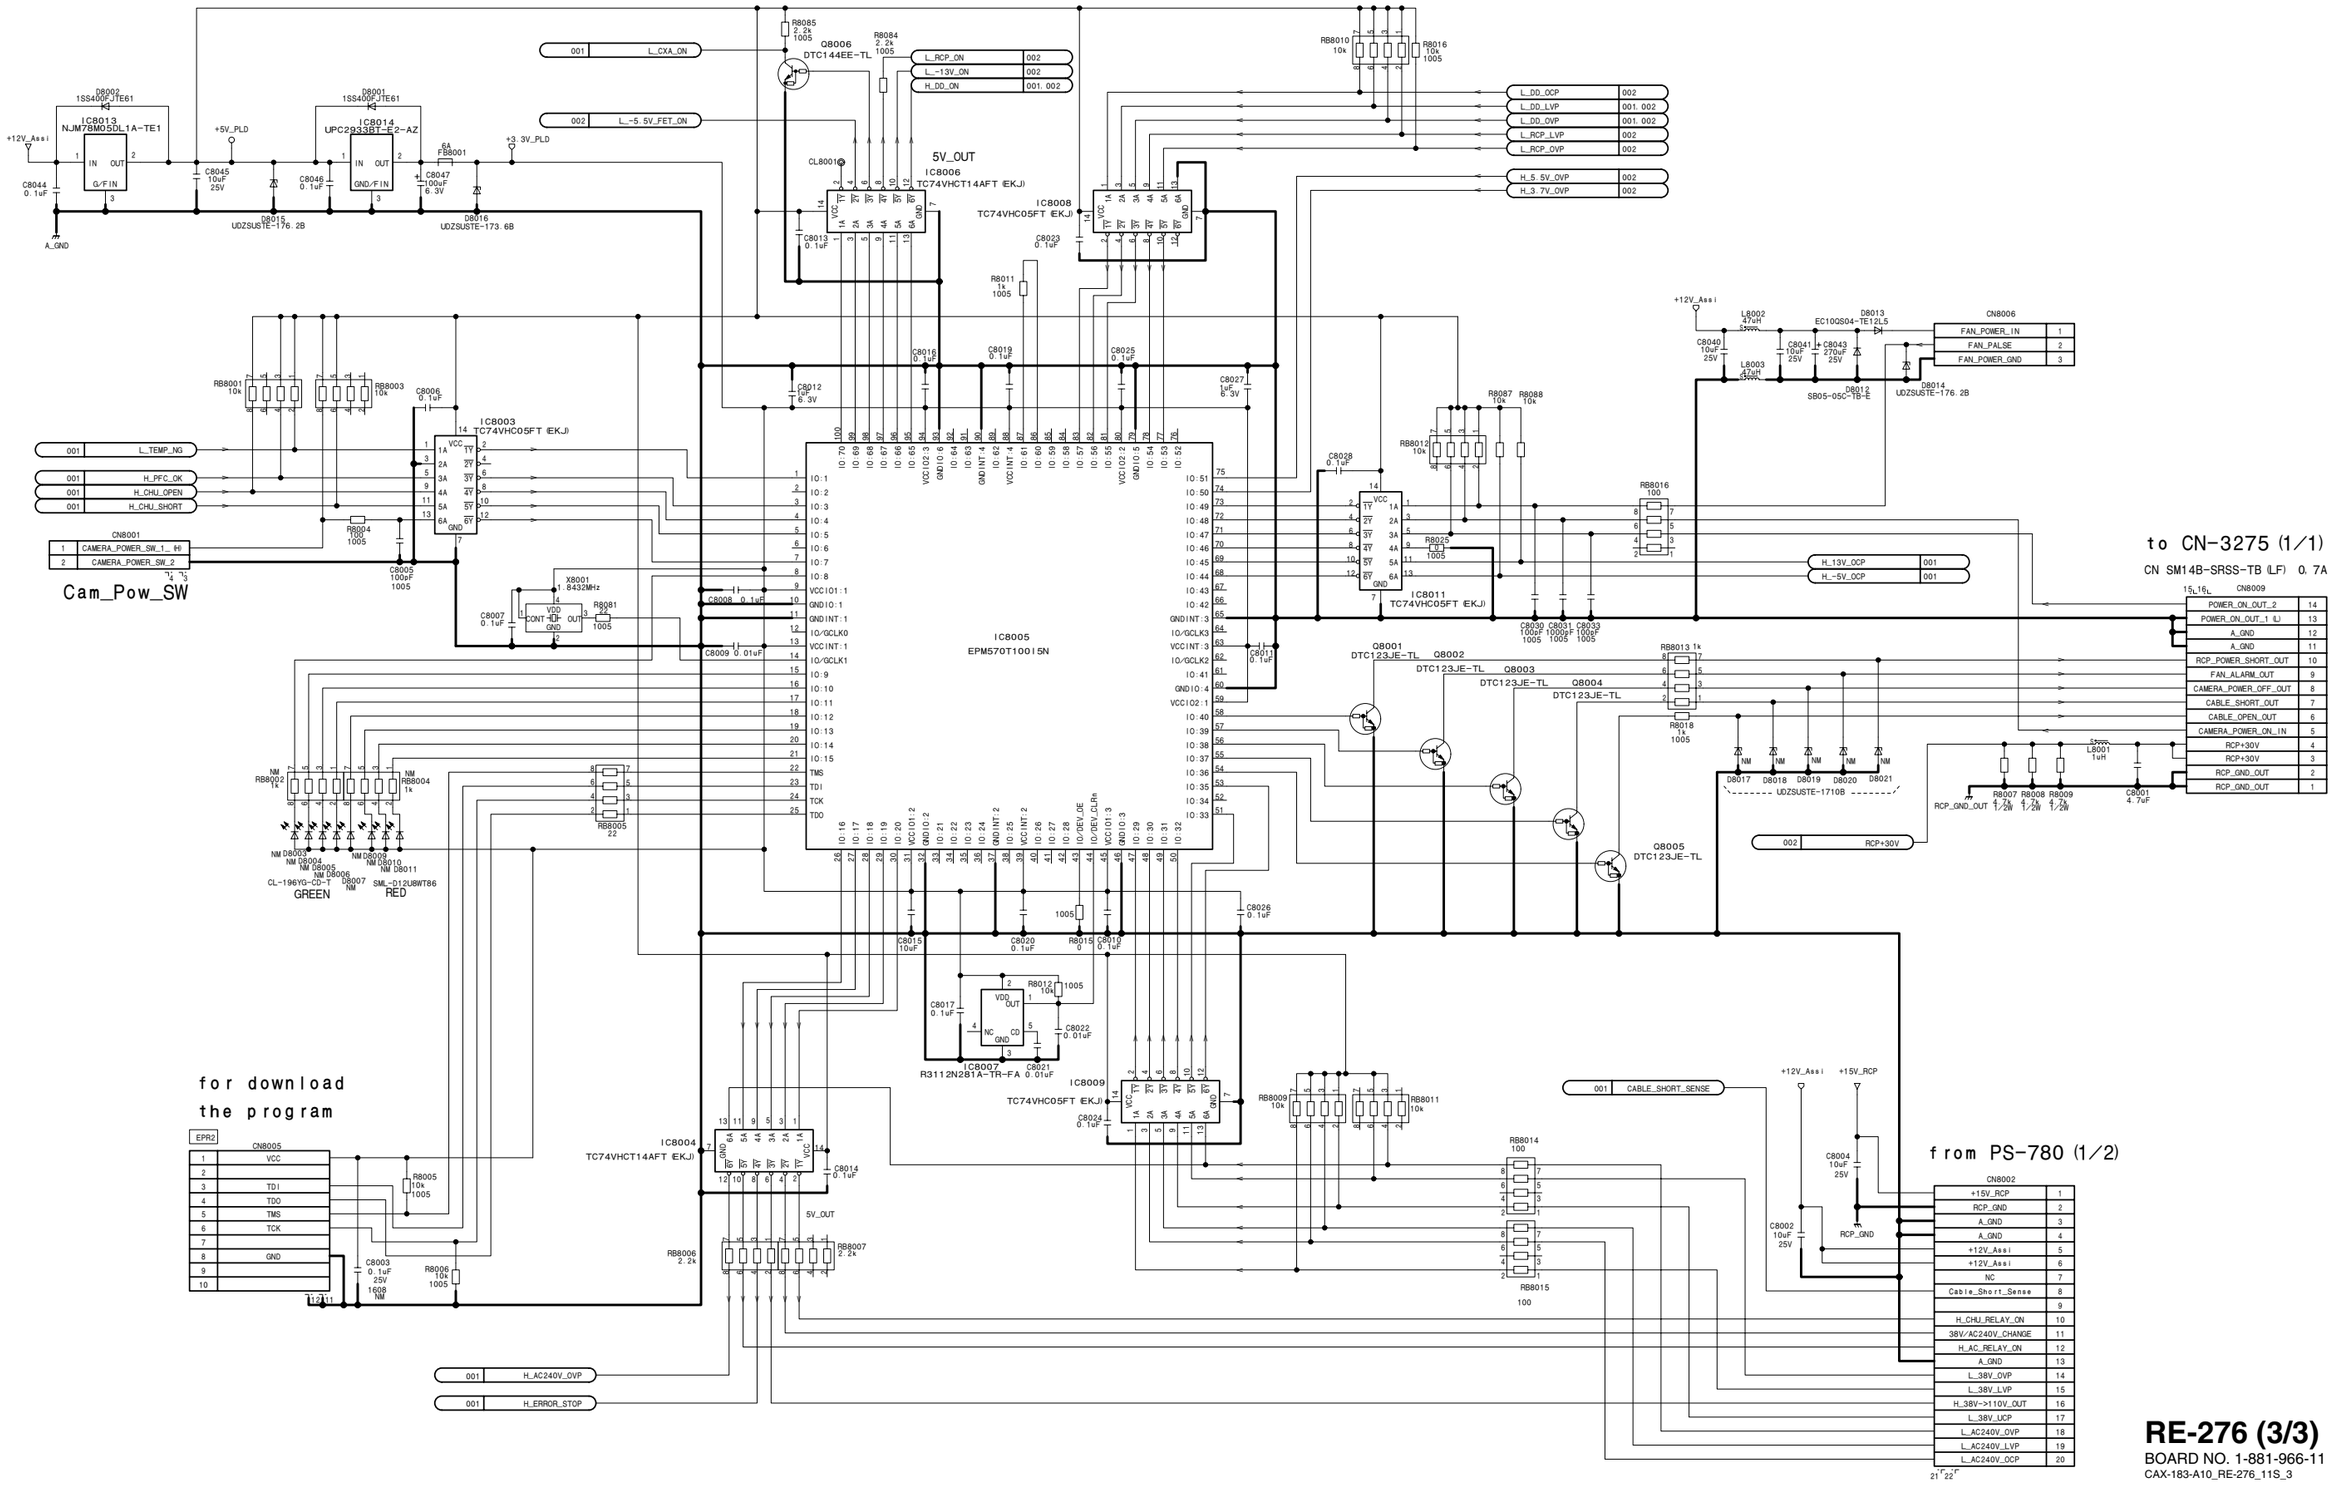

RE-276 (3/3)
BOARD NO. 1-881-966-11
CAX-183-A10_RE-276_11S_3

SDI-85
SUFFIX: -11, -31

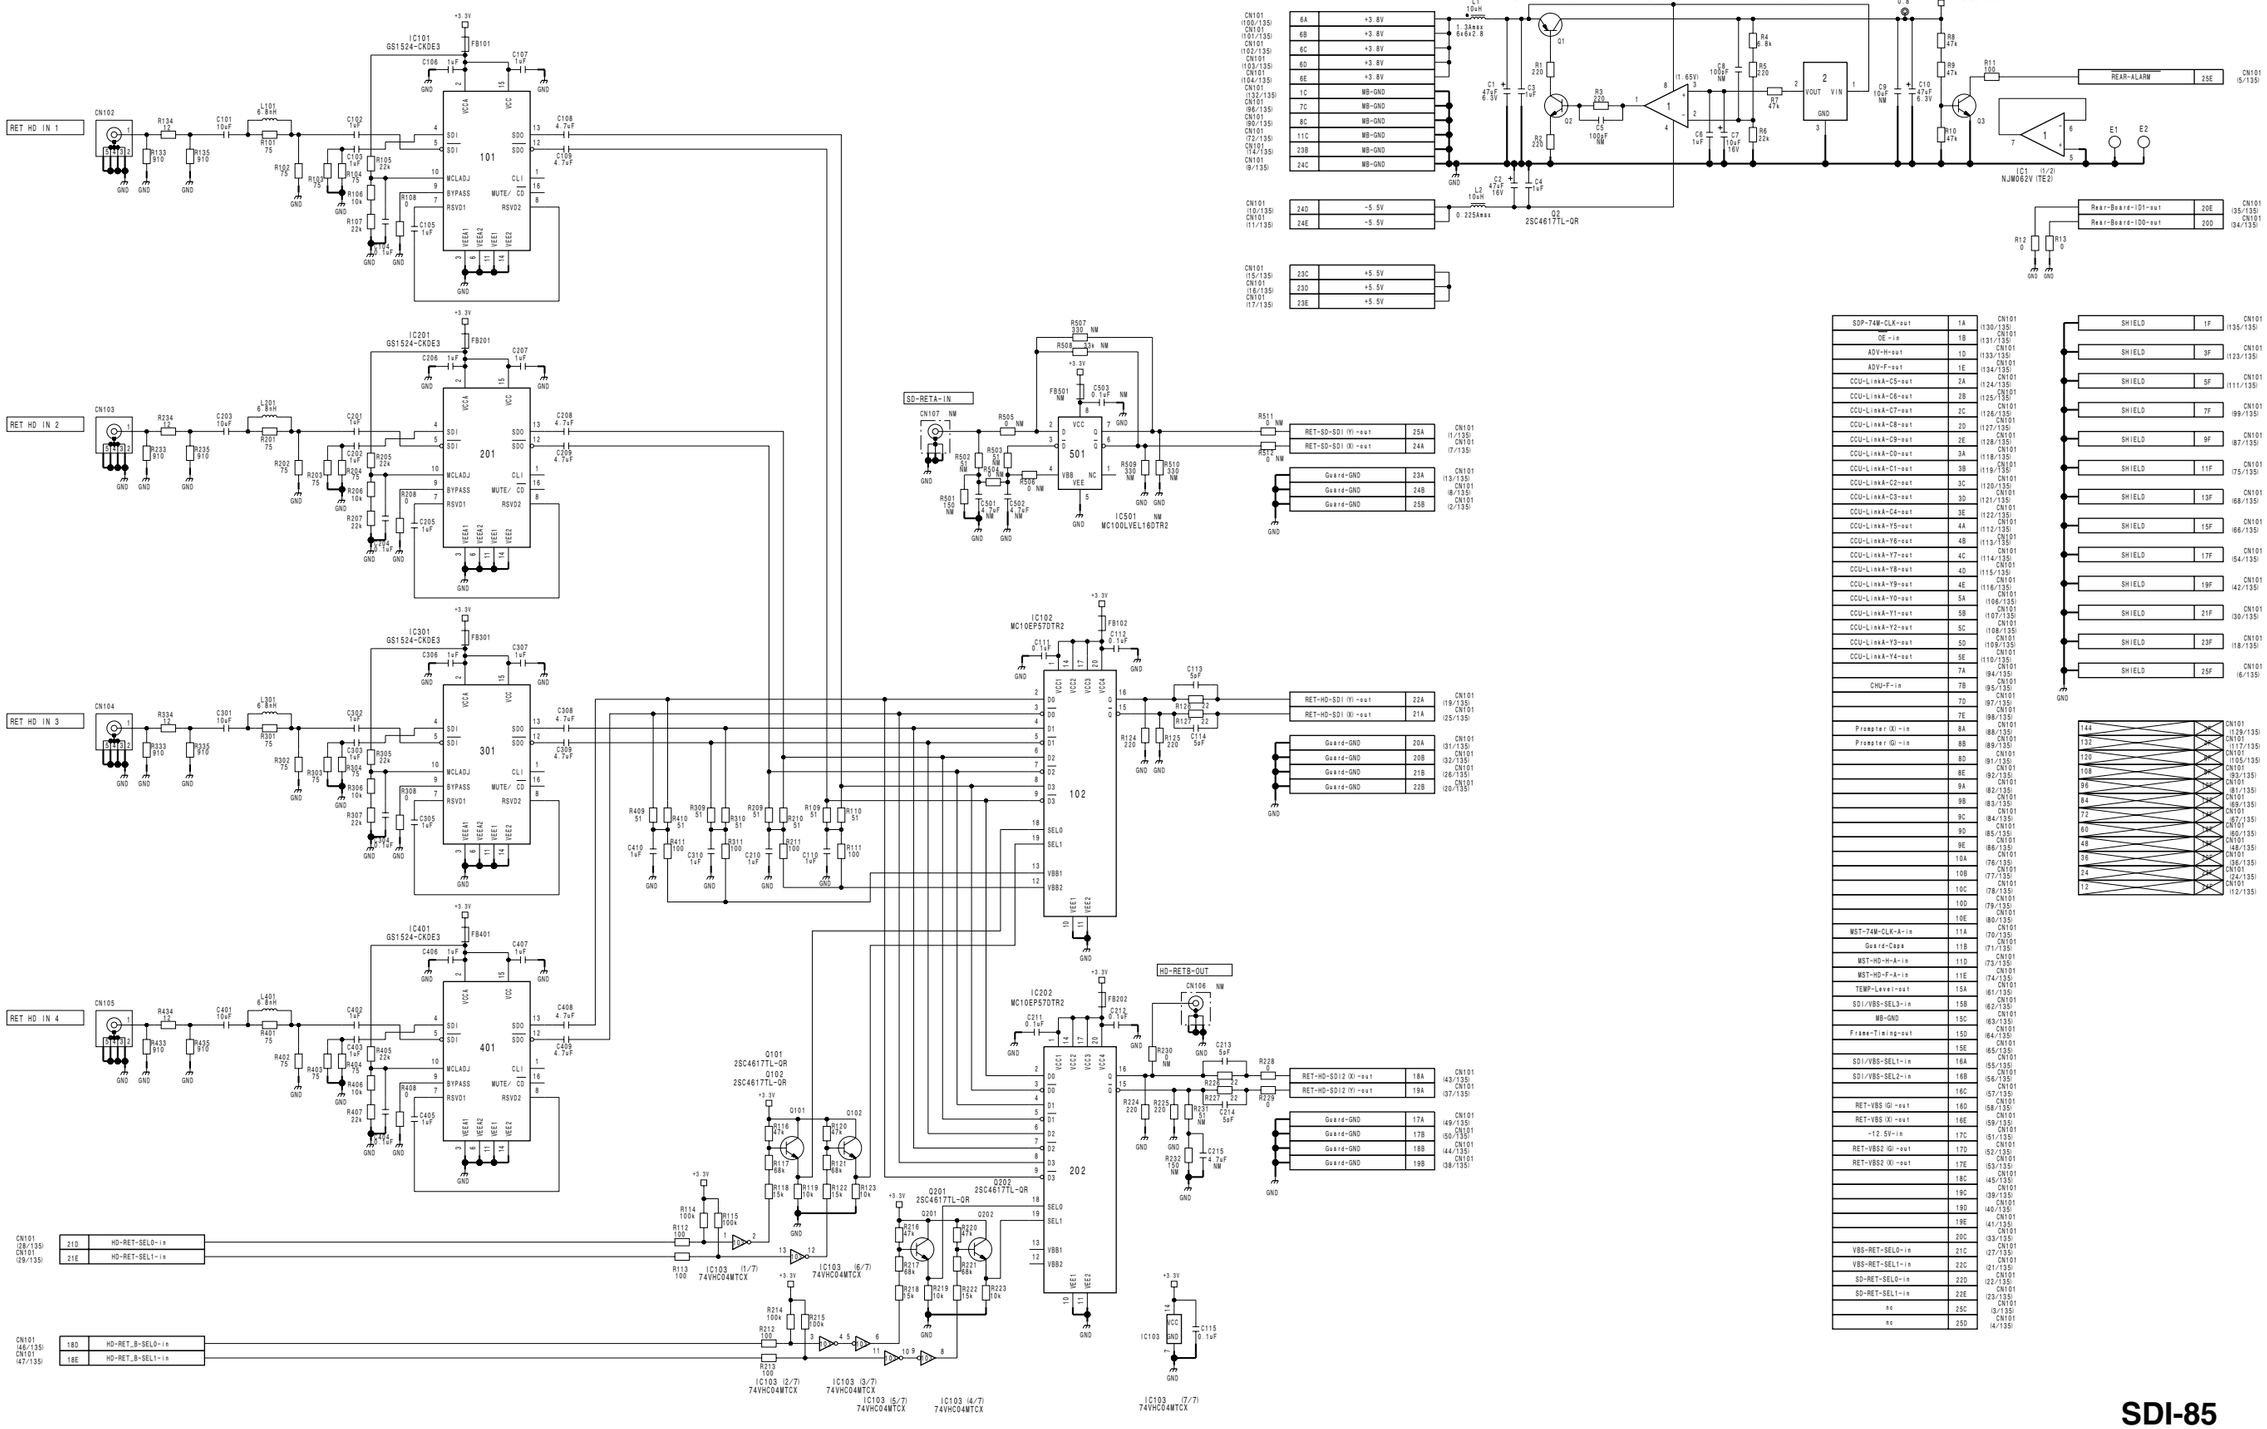

SDP-74M-CLK-out	1A	CN101 (130/135)
OE-in	1B	CN101 (131/135)
ADV-H-out	1D	CN101 (133/135)
ADV-F-out	1E	CN101 (134/135)
CCU-LinkA-C5-out	2A	CN101 (124/135)
CCU-LinkA-C6-out	2B	CN101 (125/135)
CCU-LinkA-C7-out	2C	CN101 (126/135)
CCU-LinkA-C8-out	2D	CN101 (127/135)
CCU-LinkA-C9-out	2E	CN101 (128/135)
CCU-LinkA-C0-out	3A	CN101 (118/135)
CCU-LinkA-C1-out	3B	CN101 (119/135)
CCU-LinkA-C2-out	3C	CN101 (120/135)
CCU-LinkA-C3-out	3D	CN101 (121/135)
CCU-LinkA-C4-out	3E	CN101 (122/135)
CCU-LinkA-Y5-out	4A	CN101 (112/135)
CCU-LinkA-Y6-out	4B	CN101 (113/135)
CCU-LinkA-Y7-out	4C	CN101 (114/135)
CCU-LinkA-Y8-out	4D	CN101 (115/135)
CCU-LinkA-Y9-out	4E	CN101 (116/135)
CCU-LinkA-Y0-out	5A	CN101 (106/135)
CCU-LinkA-Y1-out	5B	CN101 (107/135)
CCU-LinkA-Y2-out	5C	CN101 (108/135)
CCU-LinkA-Y3-out	5D	CN101 (109/135)
CCU-LinkA-Y4-out	5E	CN101 (110/135)
	7A	CN101 (94/135)
CHU-F-in	7B	CN101 (95/135)
	7D	CN101 (97/135)
	7E	CN101 (98/135)
Prompter (X)-in	8A	CN101 (88/135)
Prompter (G)-in	8B	CN101 (89/135)
	8D	CN101 (91/135)
	8E	CN101 (92/135)
	9A	CN101 (82/135)
	9B	CN101 (83/135)
	9C	CN101 (84/135)
	9D	CN101 (85/135)
	9E	CN101 (86/135)
	10A	CN101 (76/135)
	10B	CN101 (77/135)
	10C	CN101 (78/135)
	10D	CN101 (79/135)
	10E	CN101 (80/135)
MST-74M-CLK-A-in	11A	CN101 (70/135)
Guard-Capa	11B	CN101 (71/135)
MST-HD-H-A-in	11D	CN101 (73/135)
MST-HD-F-A-in	11E	CN101 (74/135)
TEMP-Level-out	15A	CN101 (61/135)
SDI/VBS-SEL3-in	15B	CN101 (62/135)
MB-GND	15C	CN101 (63/135)
Frame-Timing-out	15D	CN101 (64/135)
	15E	CN101 (65/135)
SDI/VBS-SEL1-in	16A	CN101 (55/135)
SDI/VBS-SEL2-in	16B	CN101 (56/135)
	16C	CN101 (57/135)
RET-VBS (G)-out	16D	CN101 (58/135)
RET-VBS (X)-out	16E	CN101 (59/135)
-12.5V-in	17C	CN101 (51/135)
RET-VB02 (G)-out	17D	CN101 (52/135)
RET-VB02 (X)-out	17E	CN101 (53/135)
	18C	CN101 (45/135)
	19C	CN101 (39/135)
	19D	CN101 (40/135)
	19E	CN101 (41/135)
	20C	CN101 (33/135)
VBS-RET-SEL0-in	21C	CN101 (27/135)
VBS-RET-SEL1-in	22C	CN101 (21/135)
SD-RET-SEL0-in	22D	CN101 (22/135)
SD-RET-SEL1-in	22E	CN101 (23/135)
nc	25C	CN101 (3/135)
nc	25D	CN101 (4/135)

SHIELD	1F	CN101 (135/135)
SHIELD	3F	CN101 (123/135)
SHIELD	5F	CN101 (111/135)
SHIELD	7F	CN101 (99/135)
SHIELD	9F	CN101 (87/135)
SHIELD	11F	CN101 (75/135)
SHIELD	13F	CN101 (68/135)
SHIELD	15F	CN101 (66/135)
SHIELD	17F	CN101 (54/135)
SHIELD	19F	CN101 (42/135)
SHIELD	21F	CN101 (30/135)
SHIELD	23F	CN101 (18/135)
SHIELD	25F	CN101 (6/135)

144		CN101 (129/135) CN101 (117/135)
132		
120		CN101 (105/135)
108		CN101 (93/135)
96		CN101 (81/135)
84		CN101 (69/135)
72		CN101 (57/135)
60		CN101 (45/135)
48		CN101 (33/135)
36		CN101 (21/135)
24		CN101 (9/135)
12		CN101 (12/135)

SDI-85
BOARD NO. 1-867-883-11, 31
HDCU1000_SDI-85_011_1

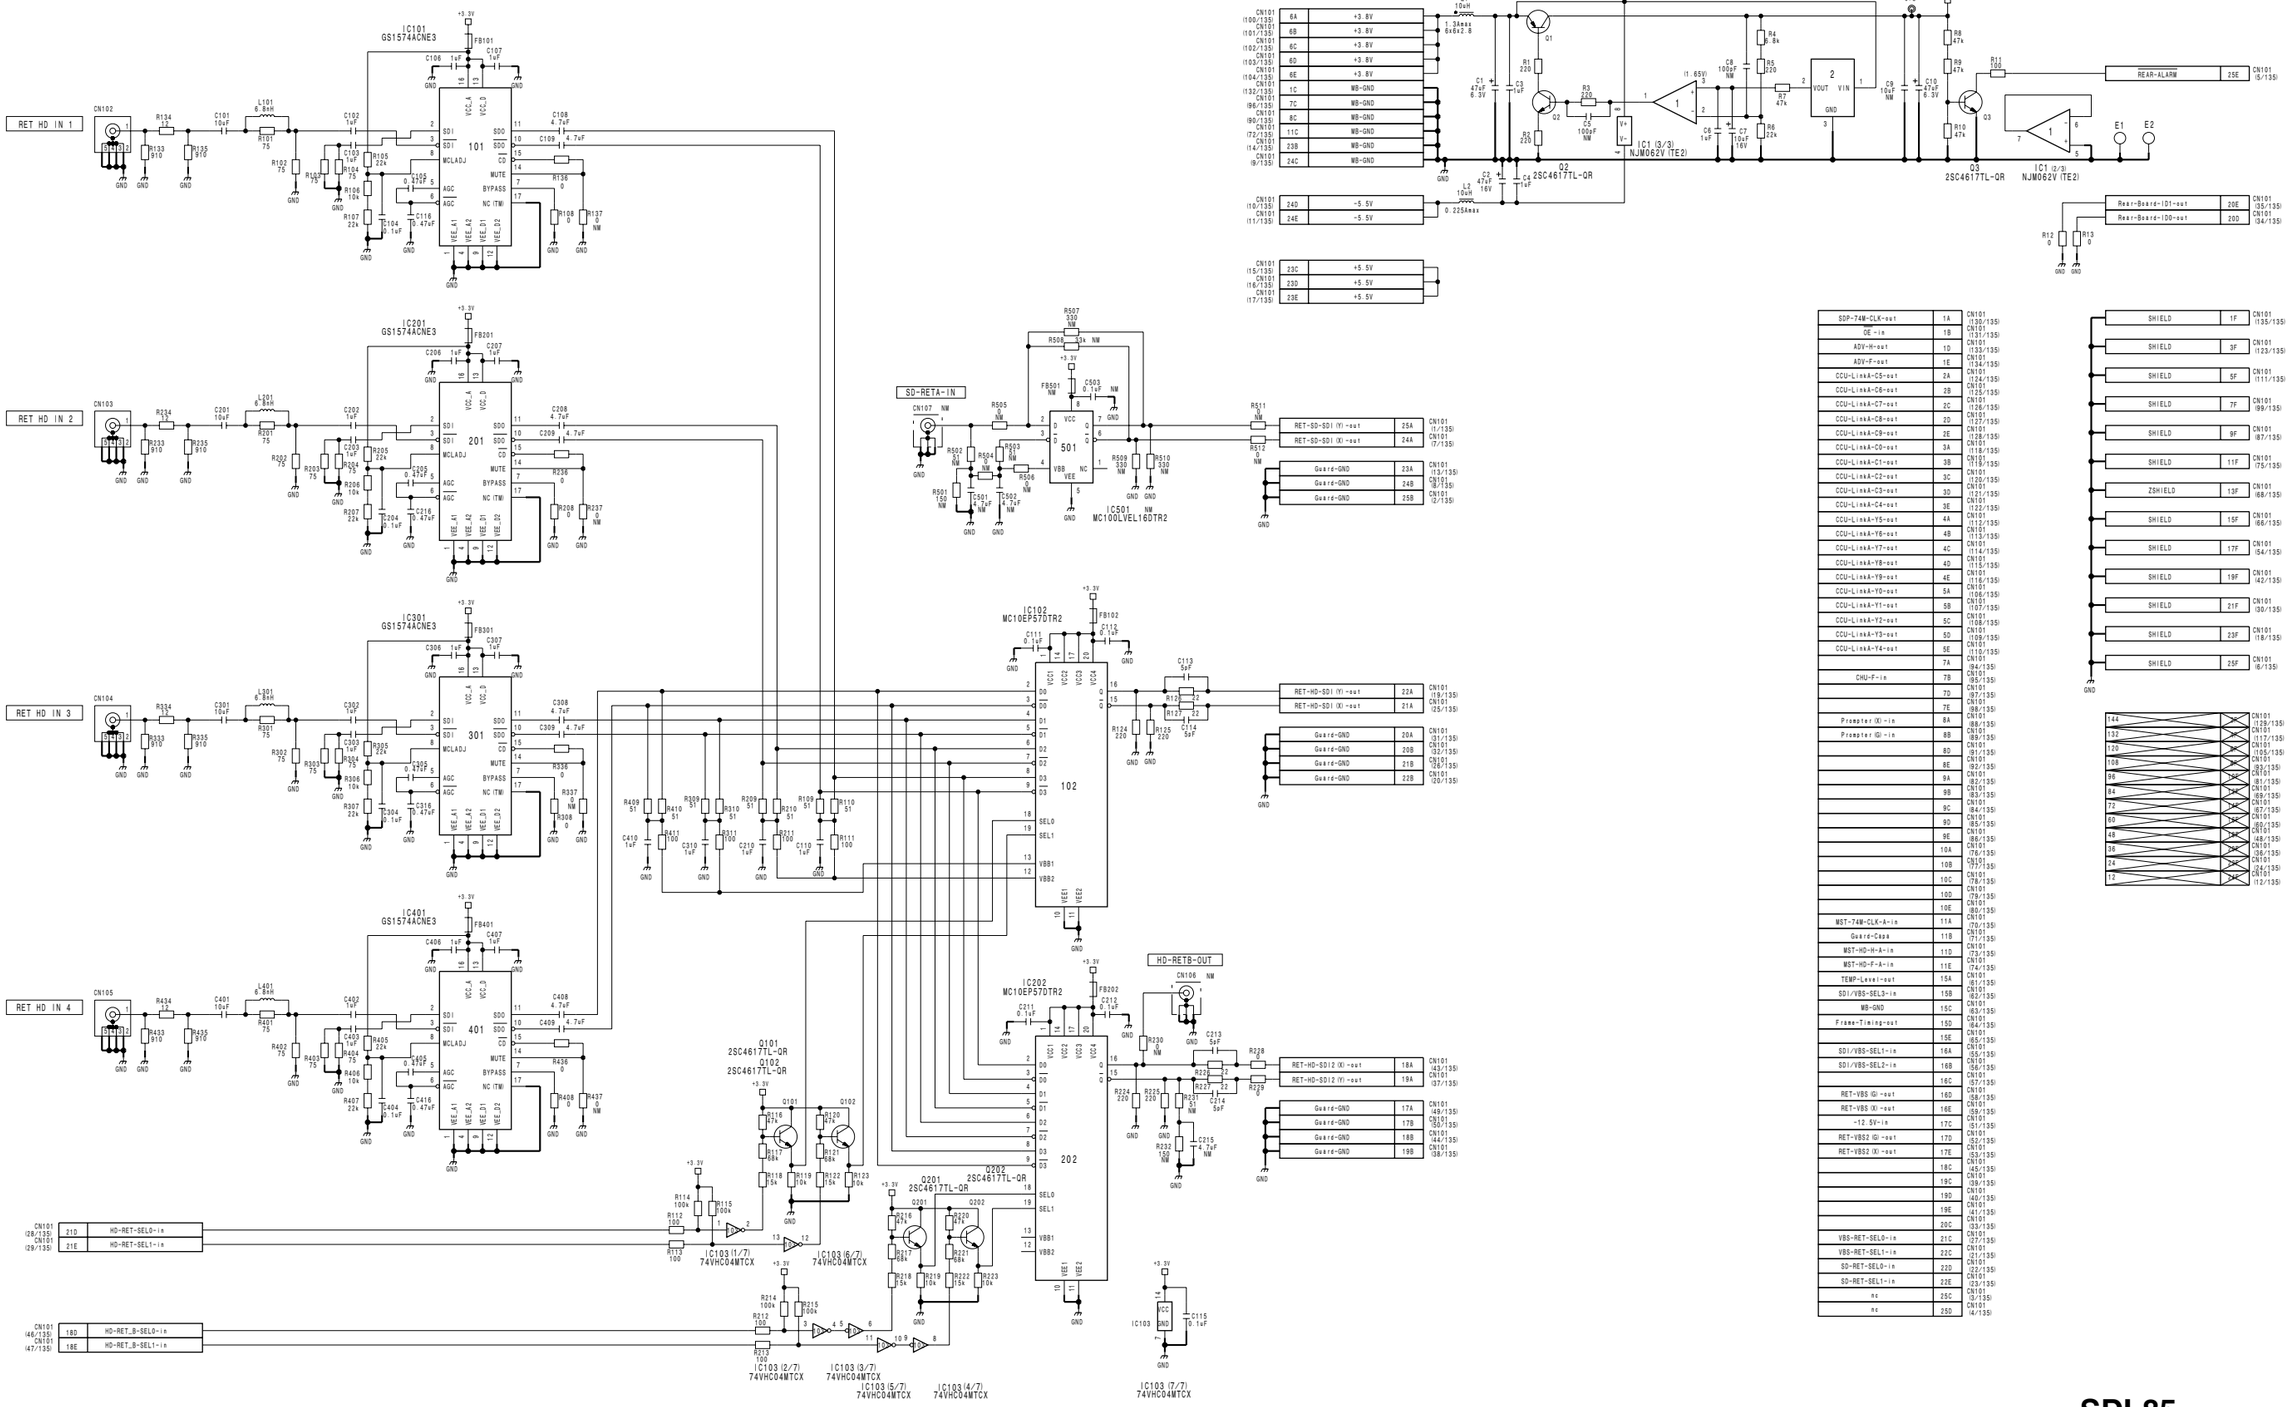

7-96 (a) 7-96 (a)

SDI-85
BOARD NO. 1-867-883-12, 32
HDCU1000_SDI-85_012_1

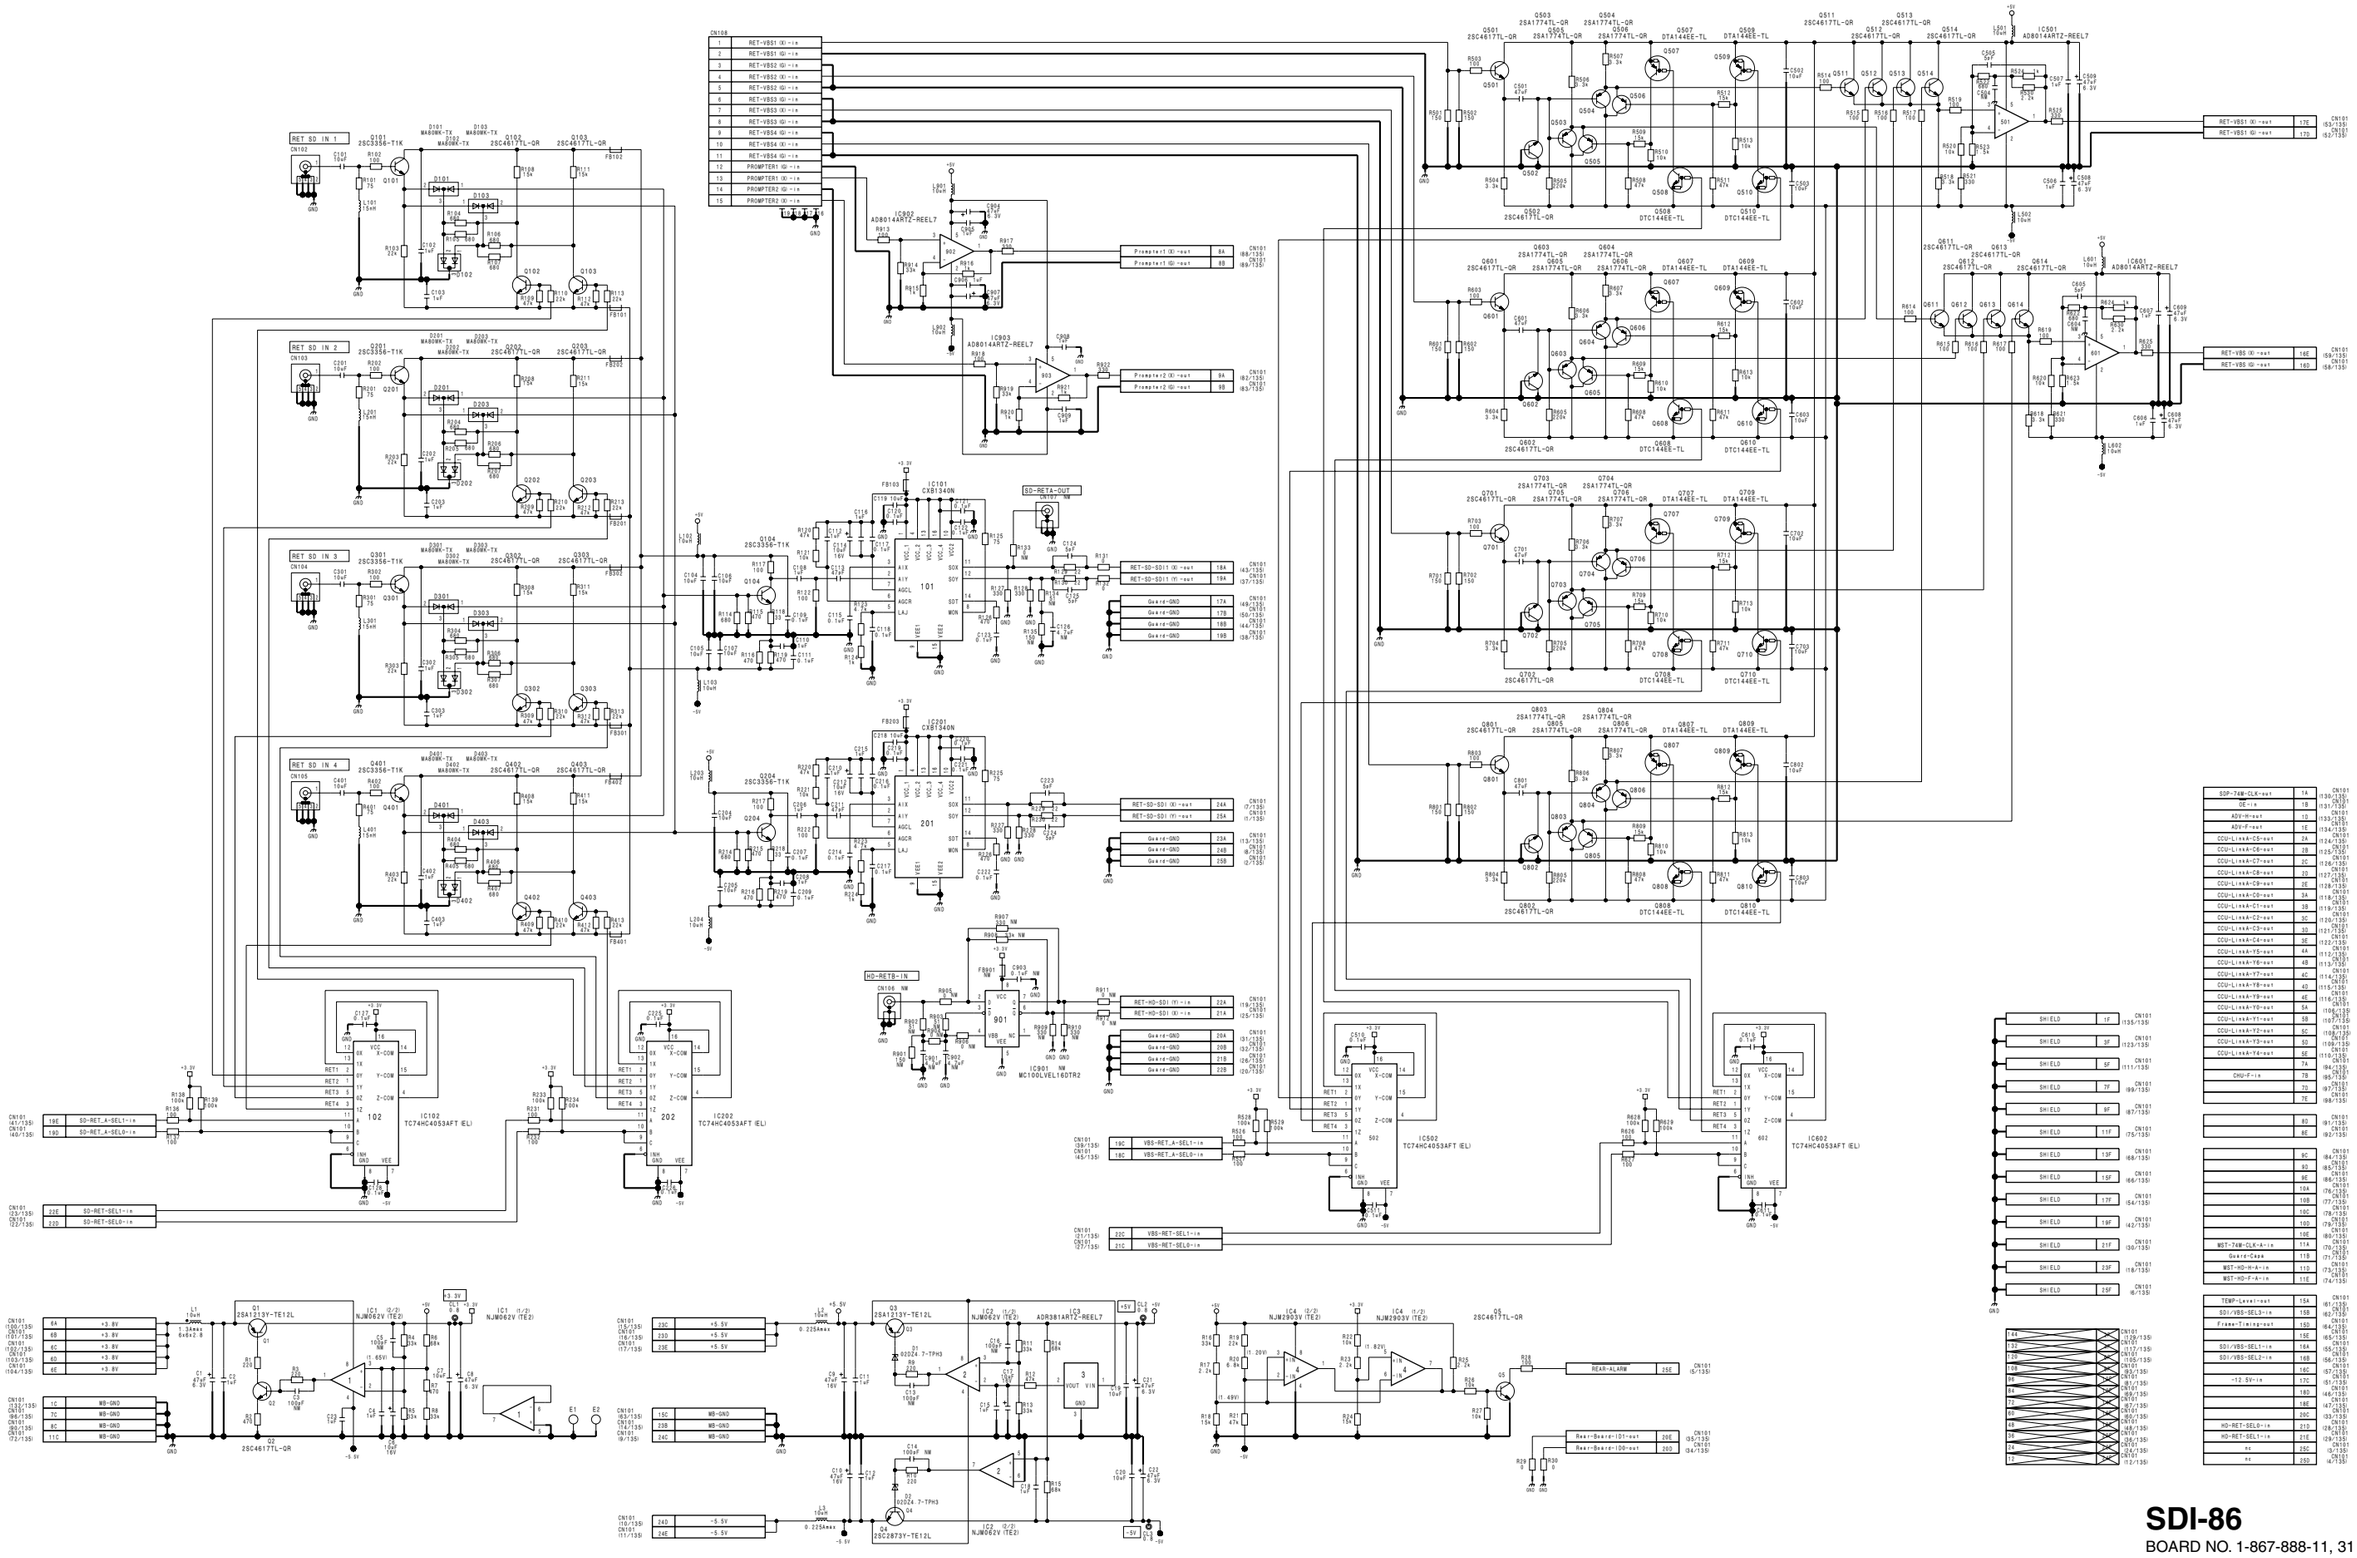

SDI-86
BOARD NO. 1-867-888-11, 31
HDCU1000_SDI-86_011_1

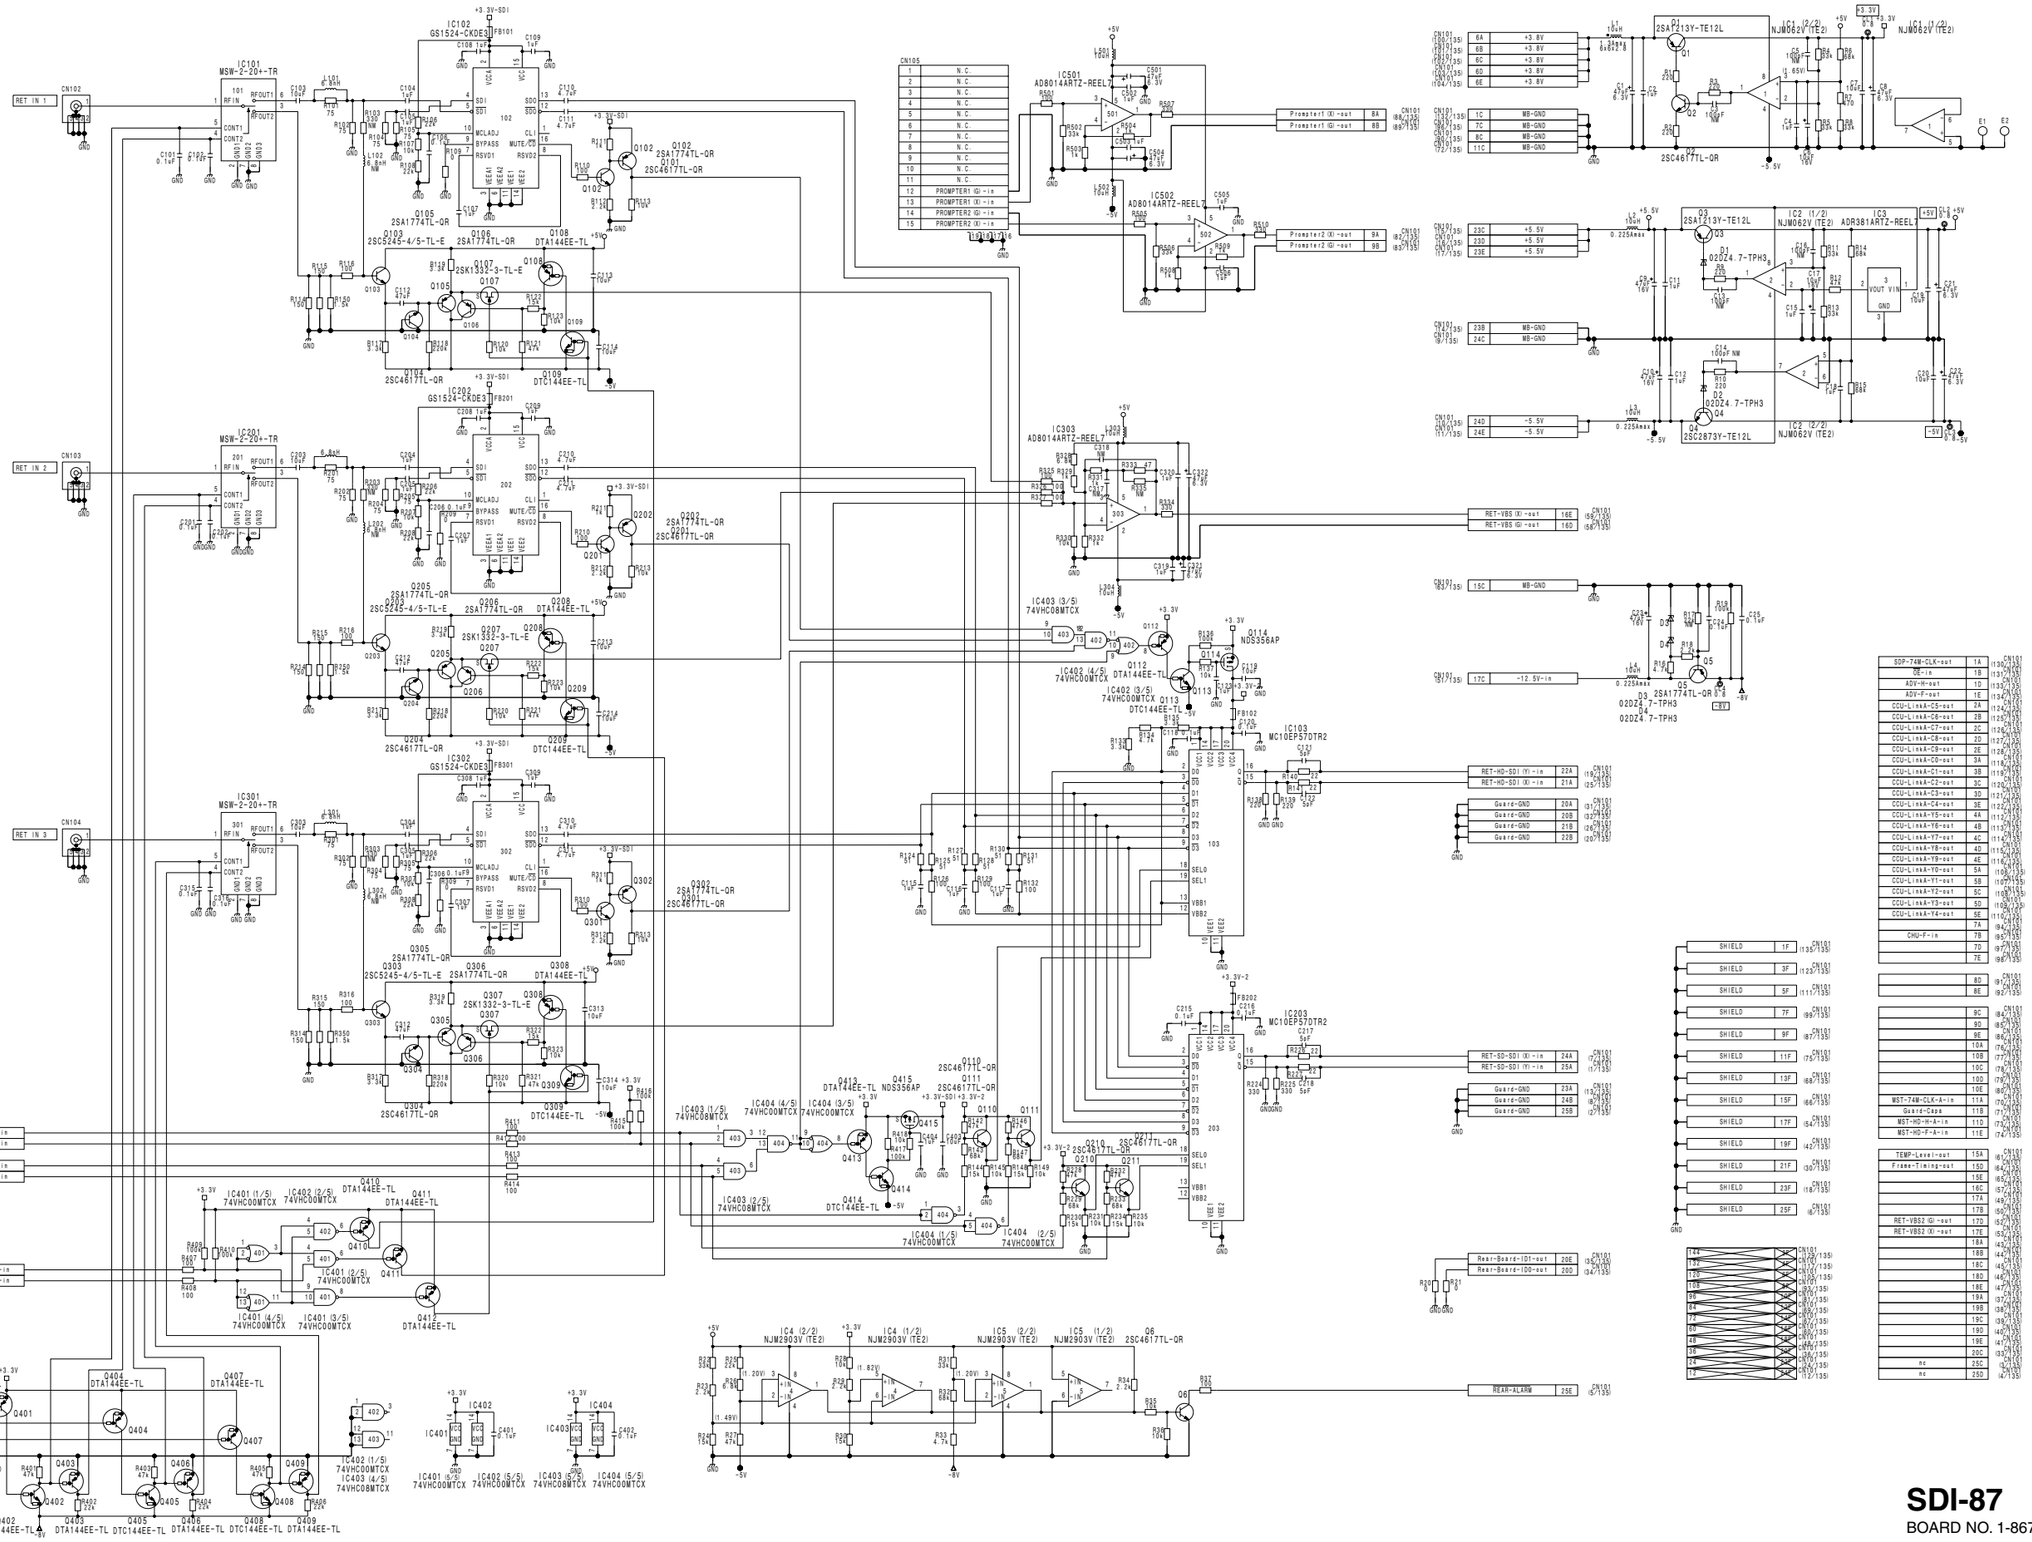

SDI-87
BOARD NO. 1-867-894-11, 31
HDCU1500_SDI-87_011_1

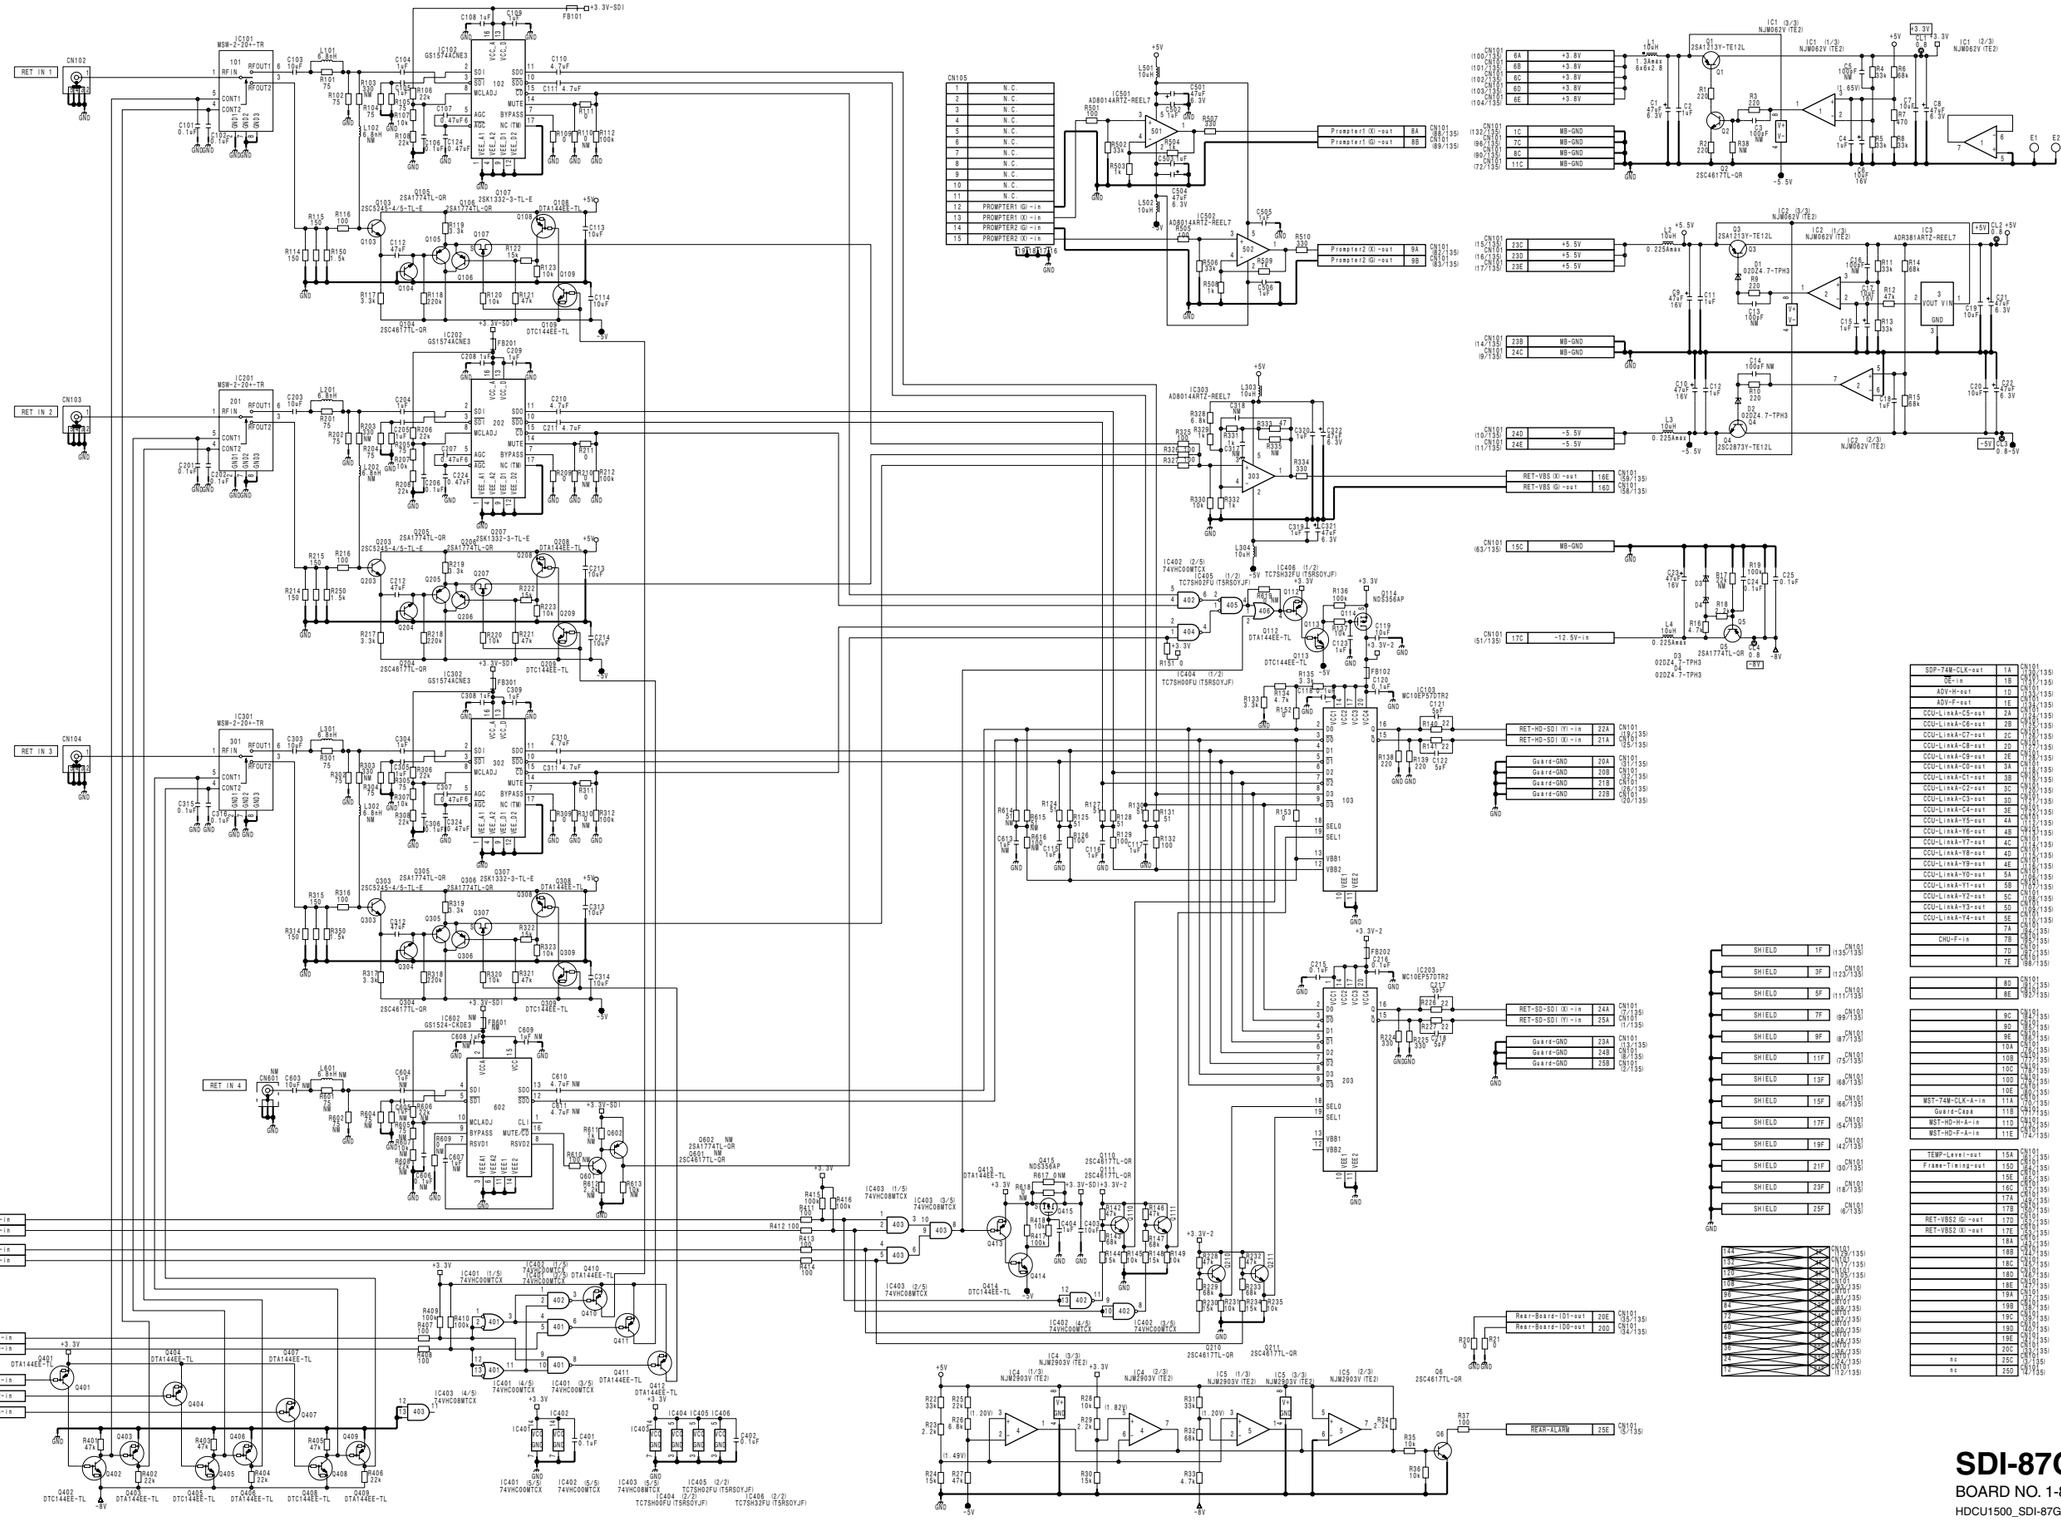
RET IN 1
RET IN 2
RET IN 3
RET IN 4
IC101 MSW-2-204-TR
IC102 GS1574ACNE3
IC201 MSW-2-204-TR
IC202 GS1574ACNE3
IC301 MSW-2-204-TR
IC302 GS1574ACNE3
IC602 GS1524-CKDE3
IC603 GS1524-CKDE3
IC1501 AD8014ARTZ-REEL7
IC1502 AD8014ARTZ-REEL7
IC1 (3/3) NJM062V (TE2)
IC1 (1/3) NJM062V (TE2)
IC1 (2/3) NJM062V (TE2)
IC2 (3/3) NJM062V (TE2)
IC2 (1/3) NJM062V (TE2)
IC2 (2/3) NJM062V (TE2)
IC3 ADR381ARTZ-REEL7
IC302 AD8014ARTZ-REEL7
IC402 (2/5) 74VHC00MTCX
IC403 (1/5) 74VHC00MTCX
IC403 (3/5) 74VHC00MTCX
IC403 (2/5) 74VHC00MTCX
IC403 (4/5) 74VHC00MTCX
IC401 (1/5) 74VHC00MTCX
IC401 (4/5) 74VHC00MTCX
IC401 (3/5) 74VHC00MTCX
IC401 (5/5) 74VHC00MTCX
IC402 (5/5) 74VHC00MTCX
IC403 (5/5) 74VHC00MTCX
IC404 (1/3) TC7SH00FU (TSR50YJF)
IC405 (1/3) TC7SH02FU (TSR50YJF)
IC404 (2/3) TC7SH00FU (TSR50YJF)
IC405 (2/3) TC7SH02FU (TSR50YJF)
IC406 (2/3) TC7SH32FU (TSR50YJF)
IC406 (1/3) TC7SH32FU (TSR50YJF)
IC4 (1/3) NJW2903V (TE2)
IC4 (2/3) NJW2903V (TE2)
IC4 (3/3) NJW2903V (TE2)
IC5 (1/3) NJW2903V (TE2)
IC5 (2/3) NJW2903V (TE2)
IC5 (3/3) NJW2903V (TE2)
IC108 MC10EP570TR2
IC109 MC10EP570TR2
IC501 GS1524-CKDE3
IC502 GS1524-CKDE3
IC503 GS1524-CKDE3
IC504 GS1524-CKDE3
IC505 GS1524-CKDE3
IC506 GS1524-CKDE3
IC507 GS1524-CKDE3
IC508 GS1524-CKDE3
IC509 GS1524-CKDE3
IC510 GS1524-CKDE3
IC511 GS1524-CKDE3
IC512 GS1524-CKDE3
IC513 GS1524-CKDE3
IC514 GS1524-CKDE3
IC515 GS1524-CKDE3
IC516 GS1524-CKDE3
IC517 GS1524-CKDE3
IC518 GS1524-CKDE3
IC519 GS1524-CKDE3
IC520 GS1524-CKDE3

SDP-12 (1/3)
SUFFIX: -11

SDP-12 (1/3)
SUFFIX: -11

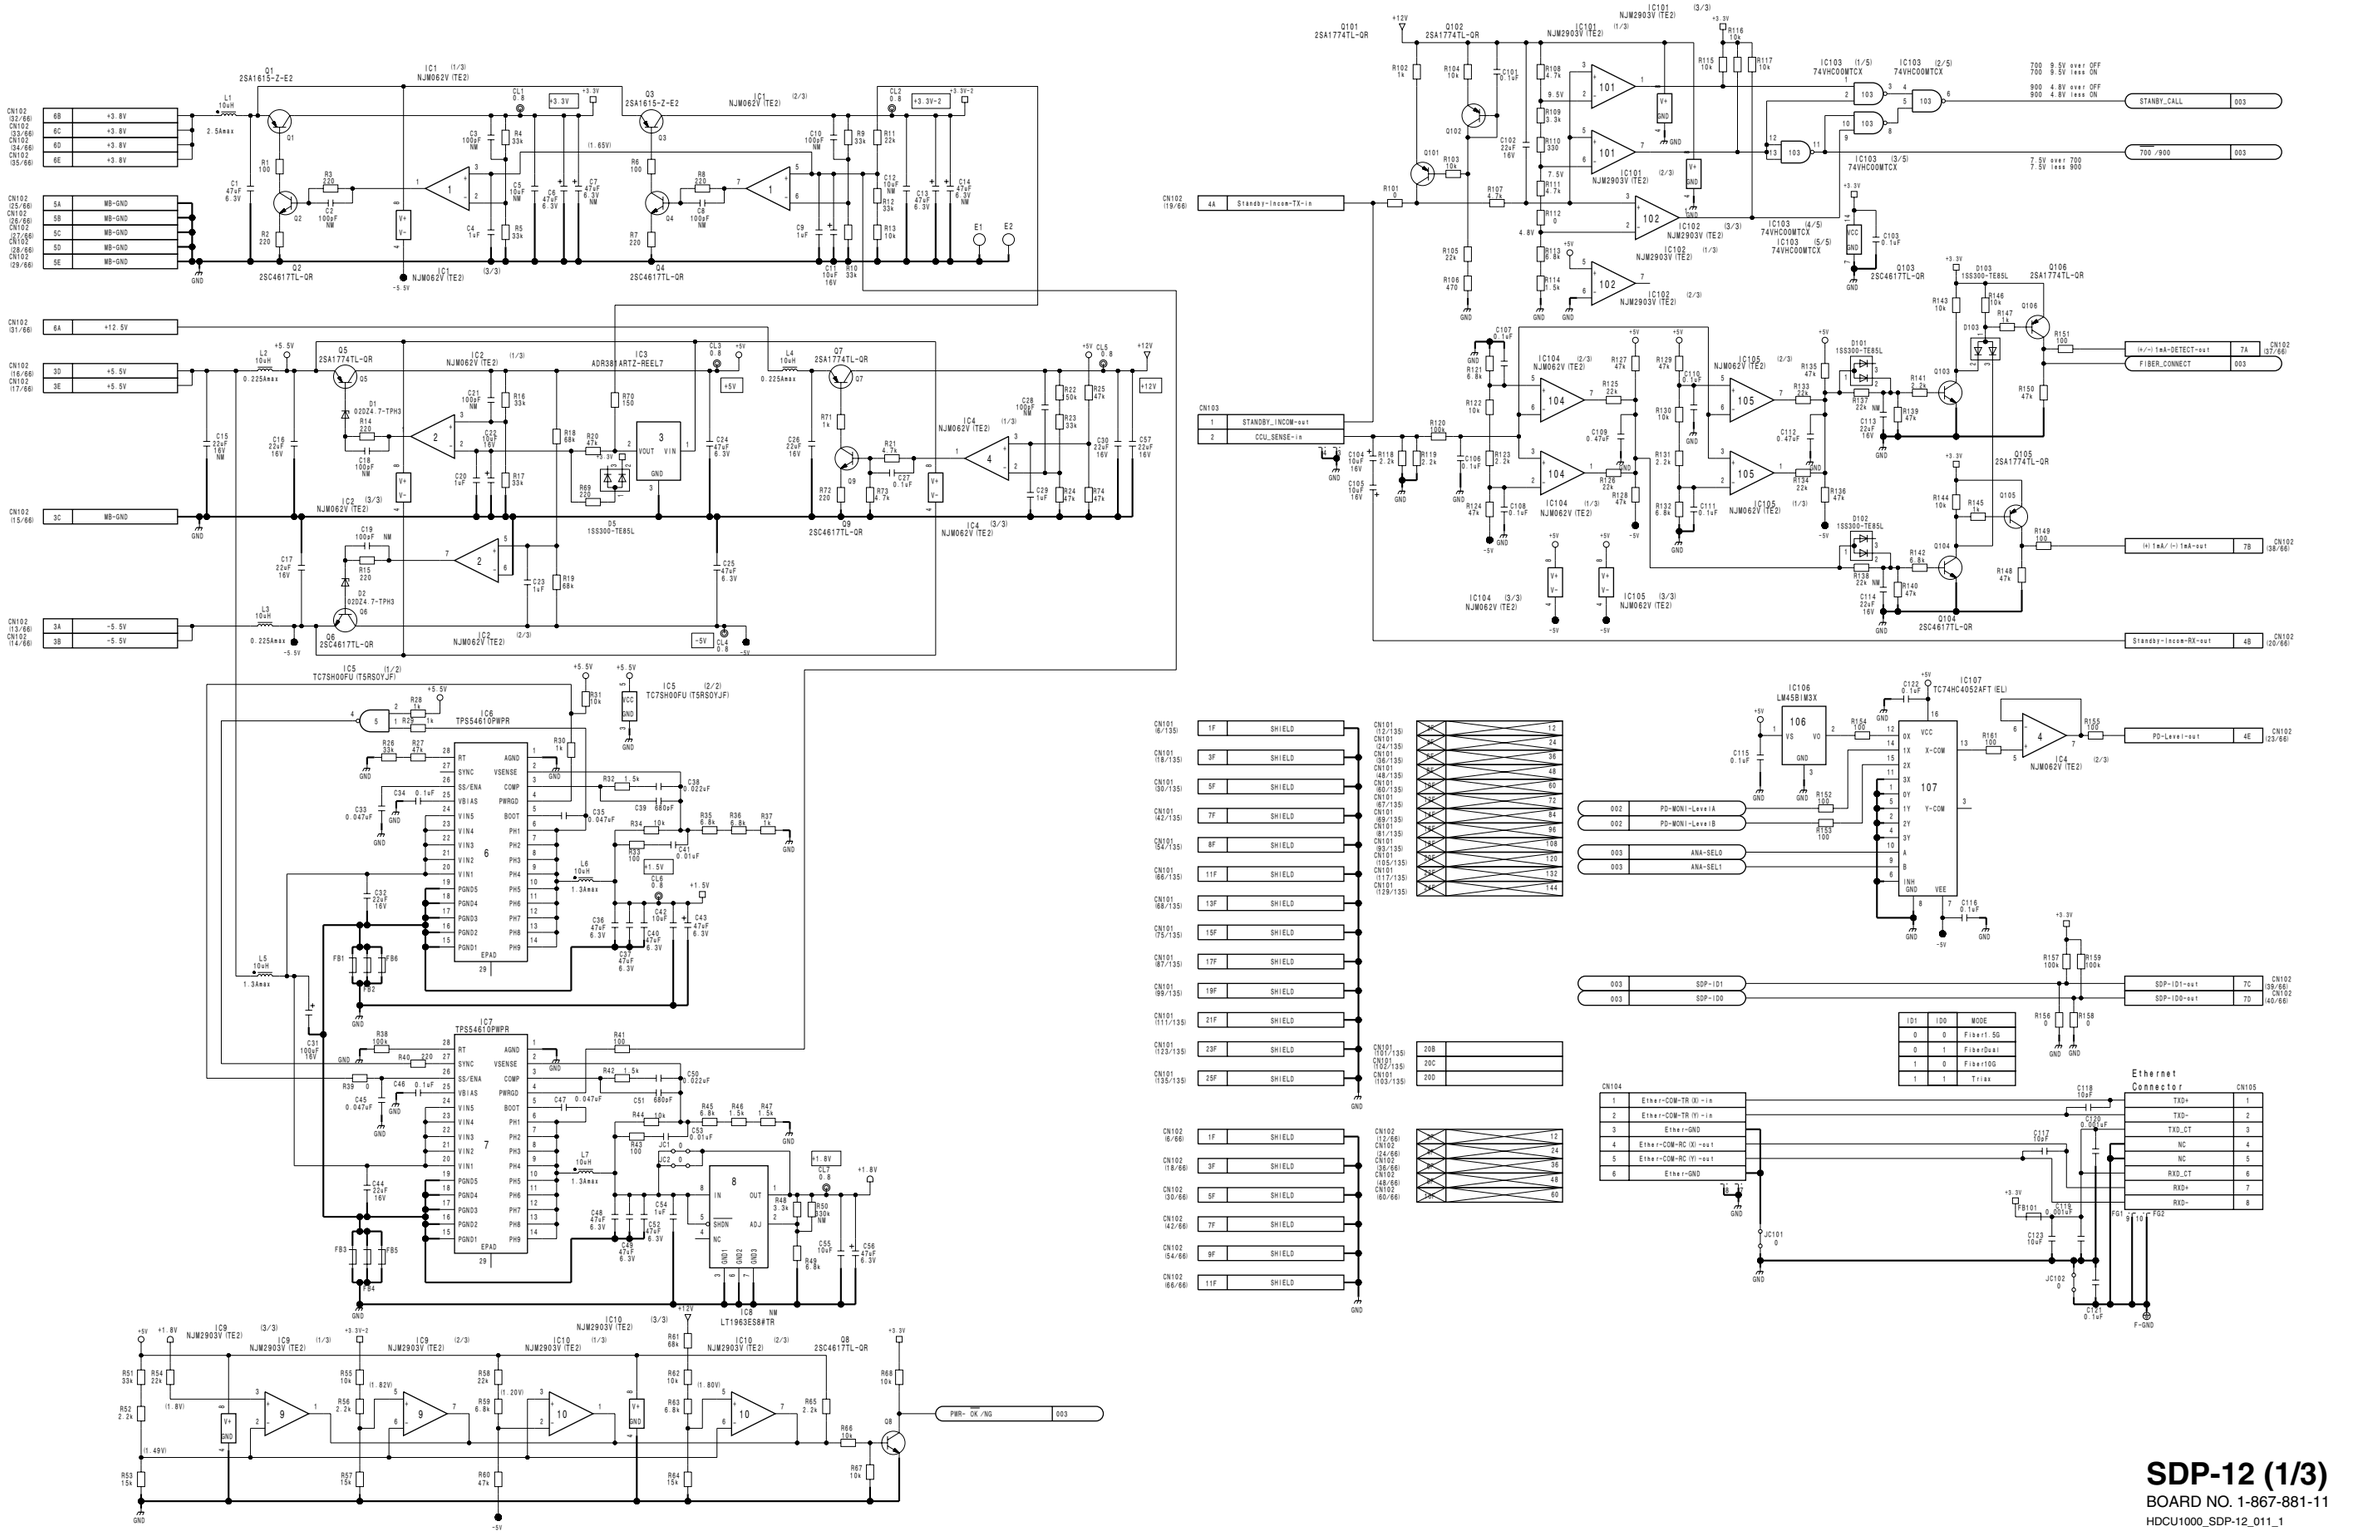

SDP-12 (1/3)
BOARD NO. 1-867-881-11
HDCU1000_SDP-12_011_1

SDP-12 (2/3) **SUFFIX: -11**

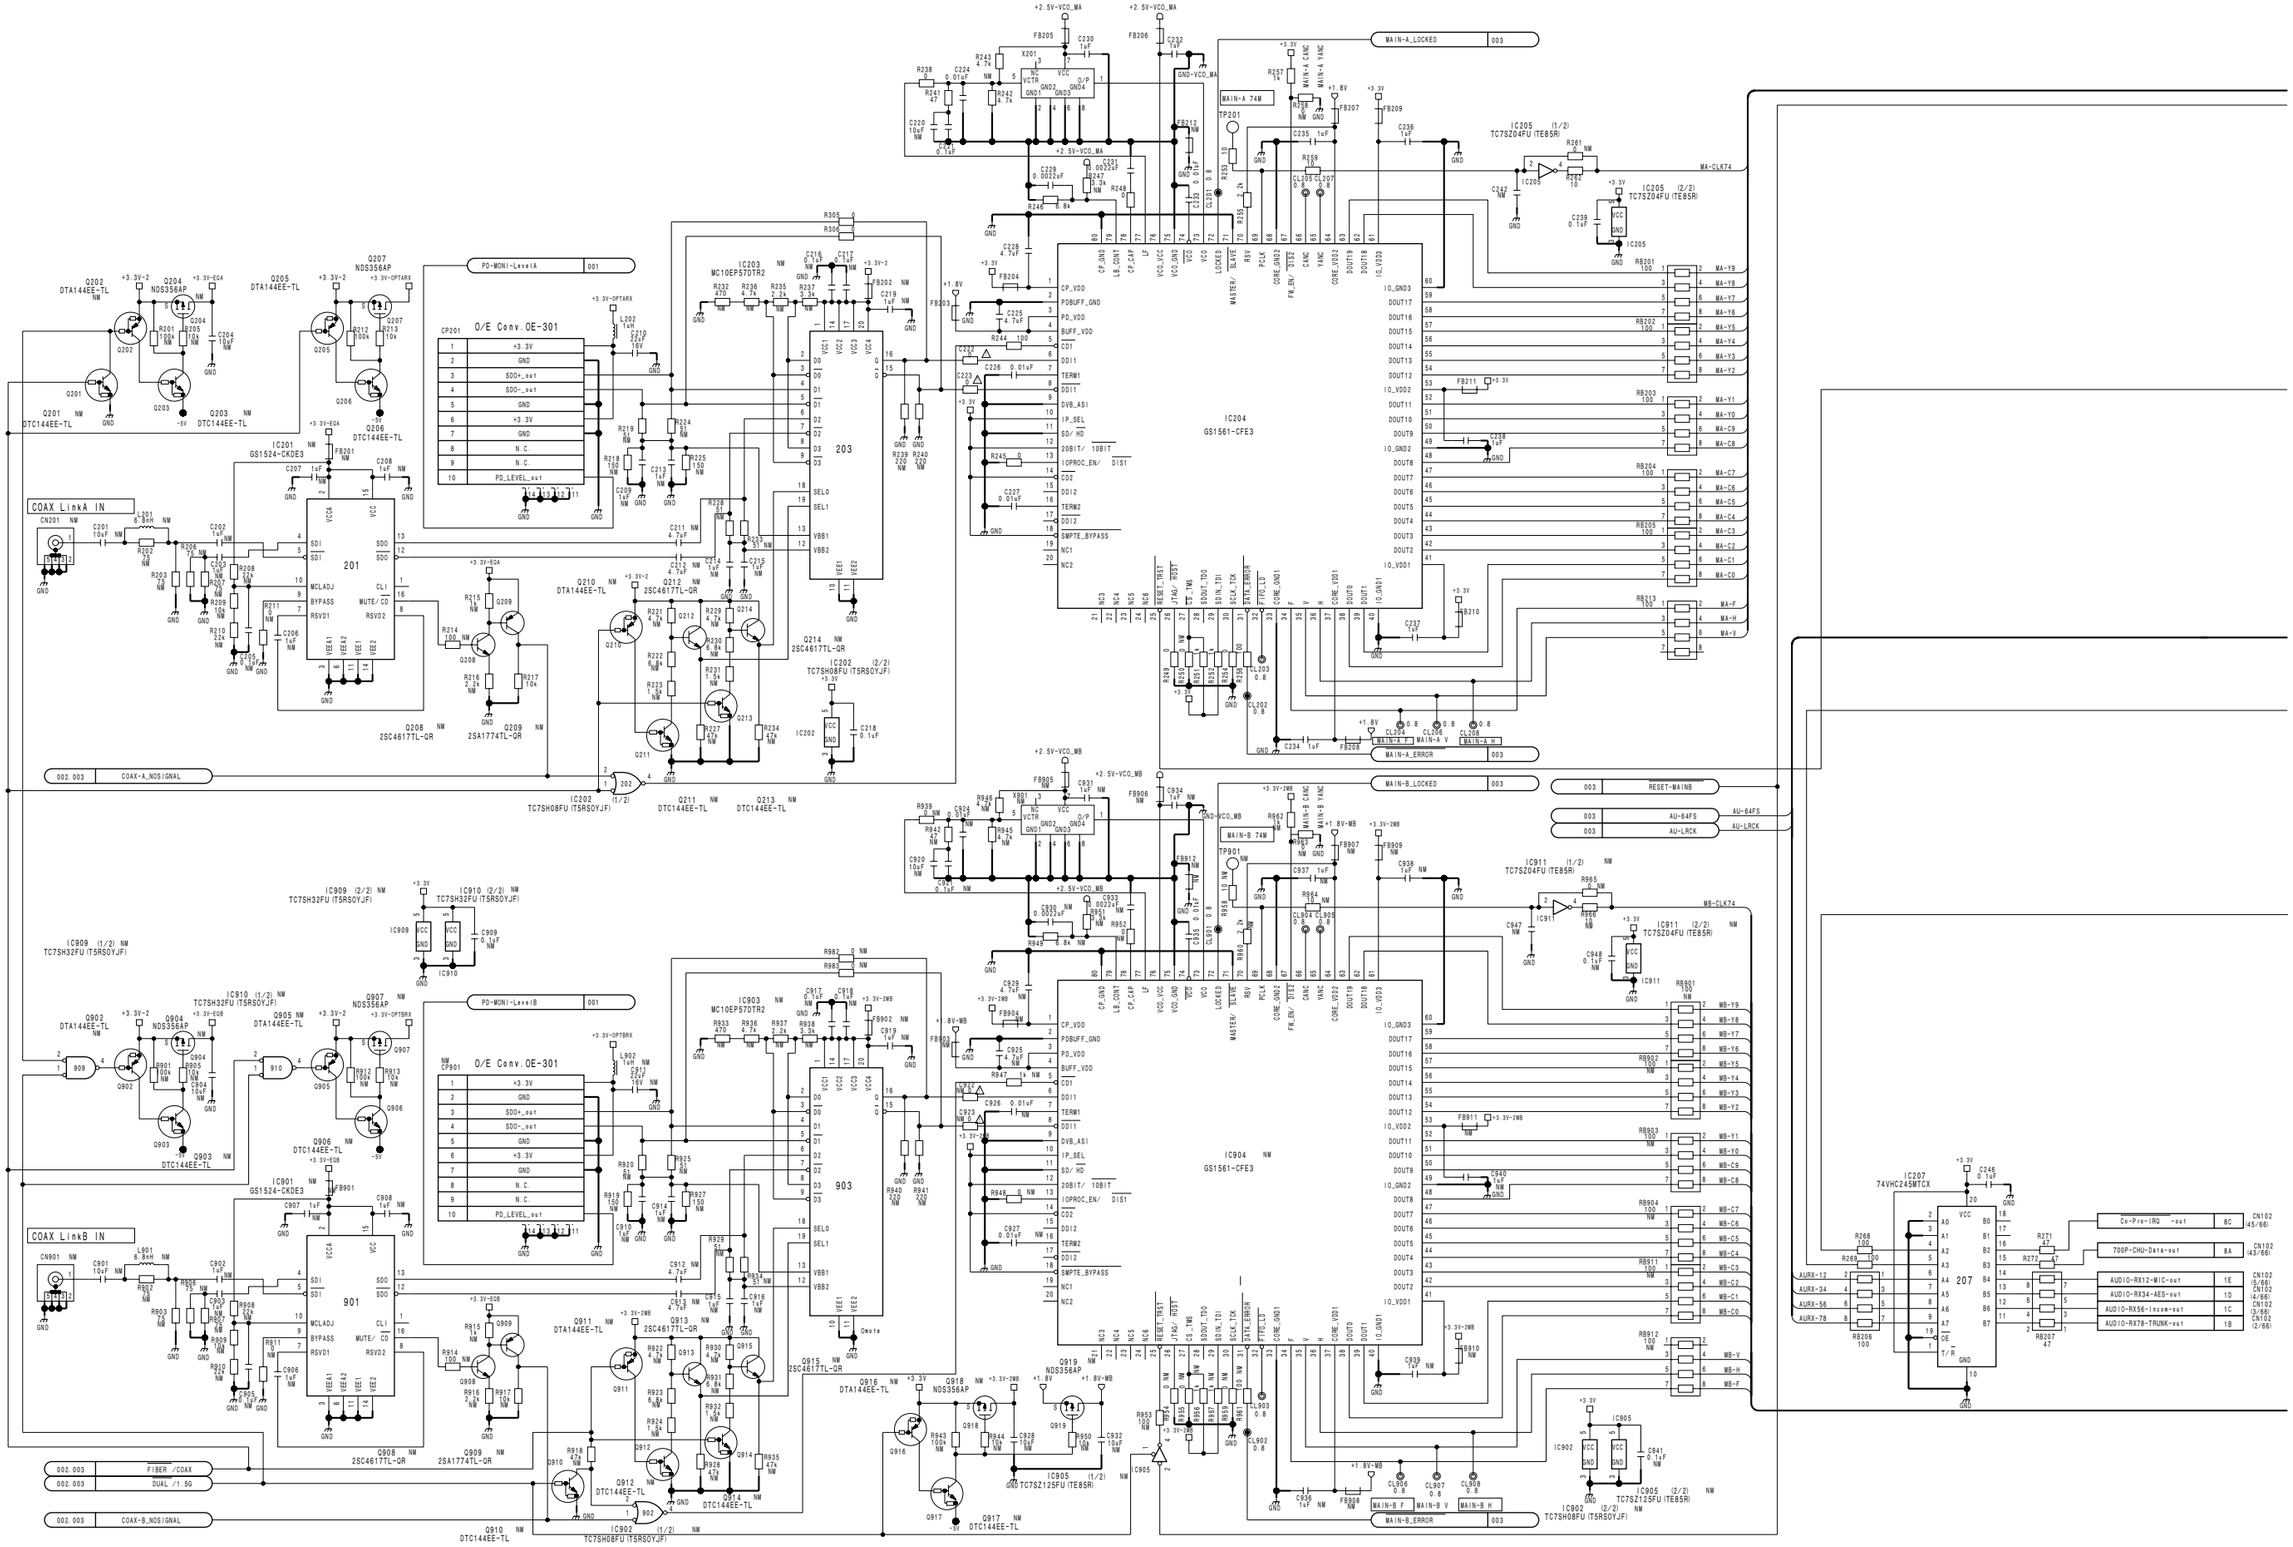

SDP-12 (2/3) SUFFIX: -11

COMMAND DEMUX

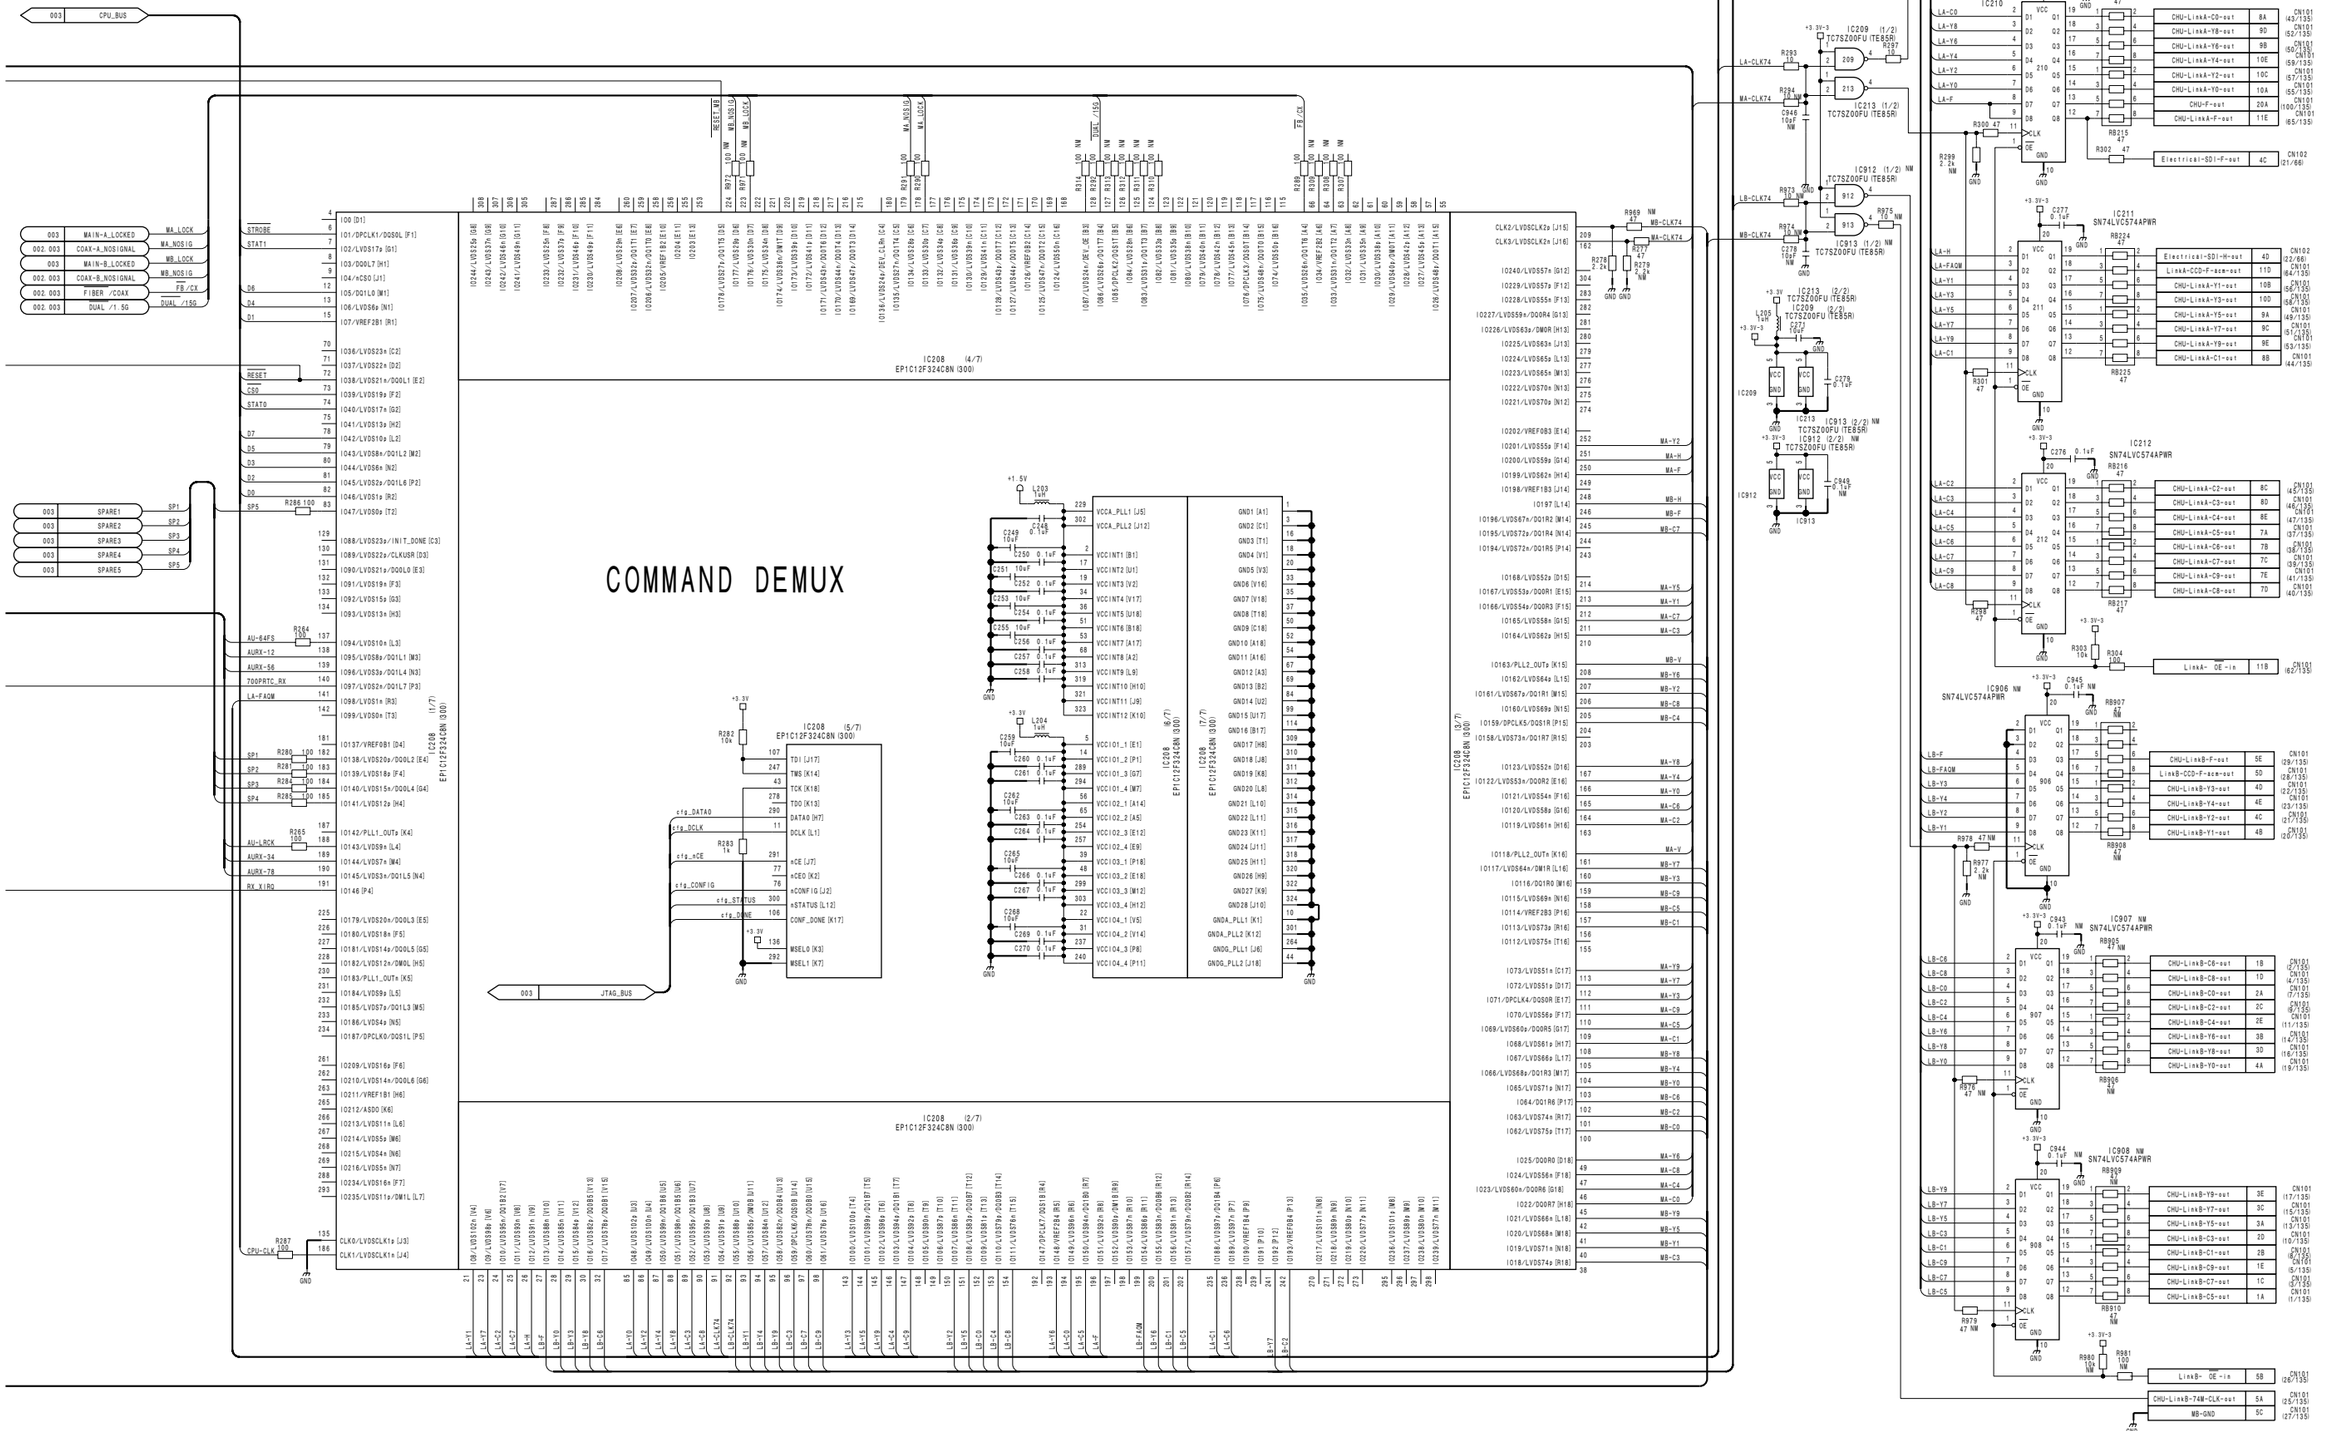

SDP-12 (2/3)
BOARD NO. 1-867-881-11
HDCU1000_SDP-12_011_2

SDP-12 (3/3) **SUFFIX: -11**

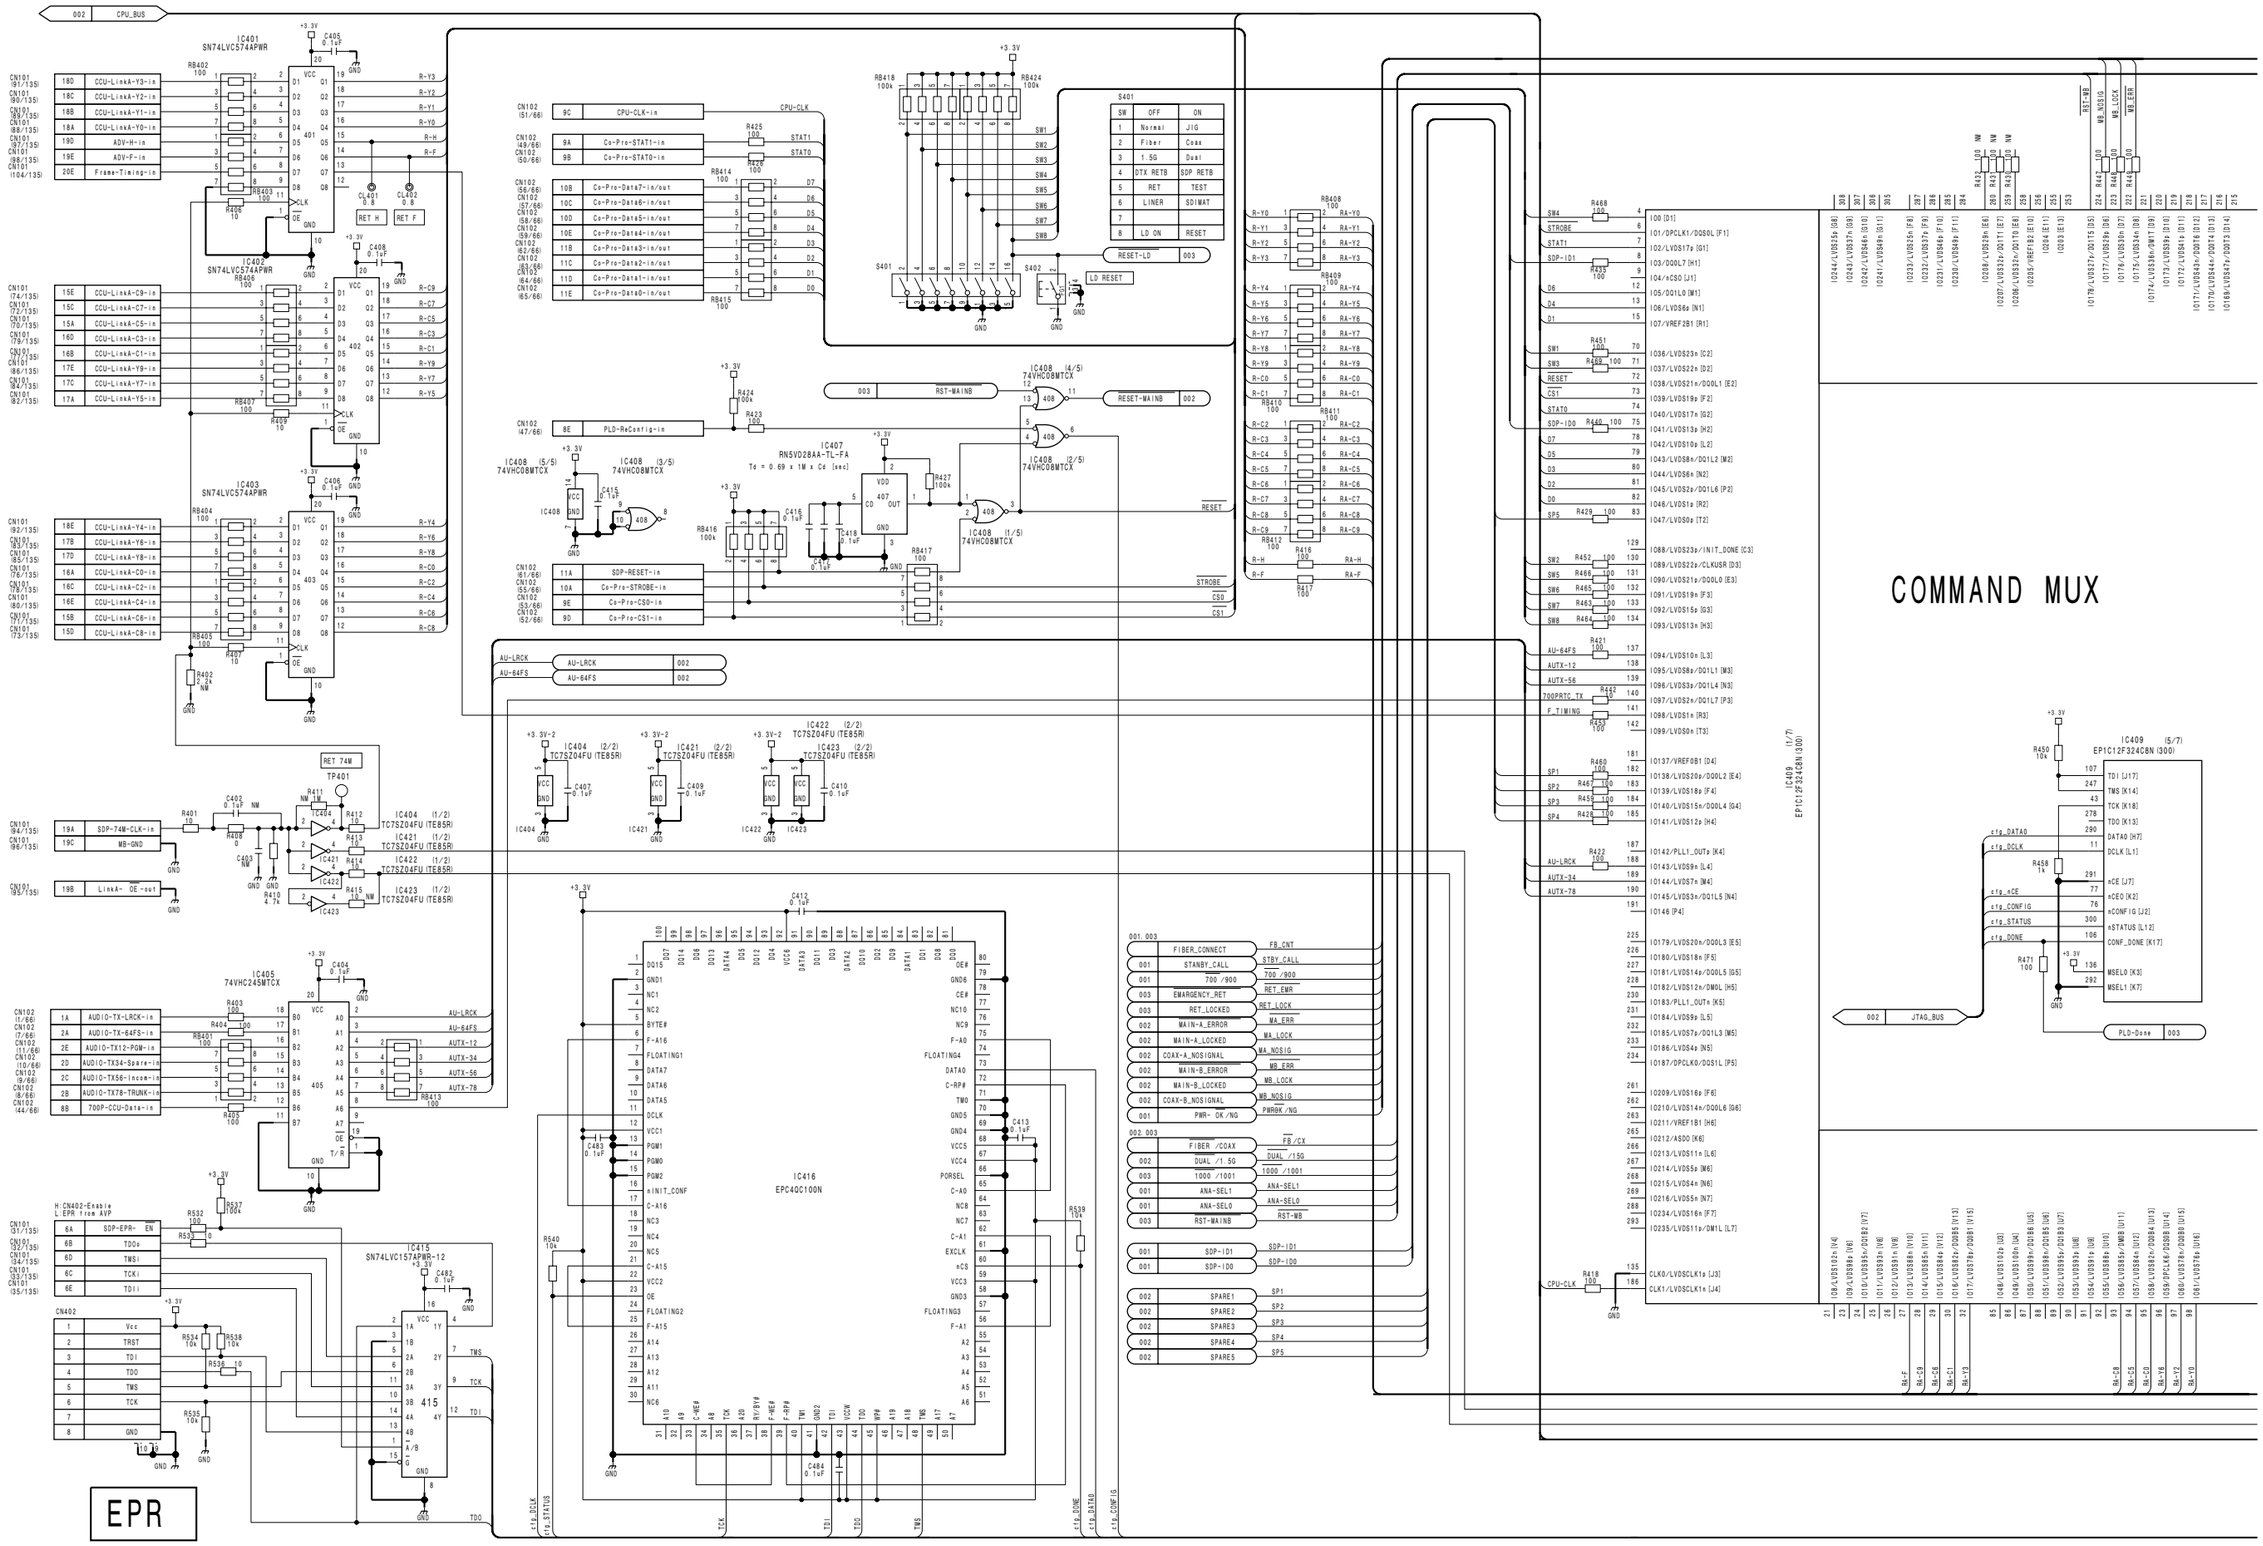

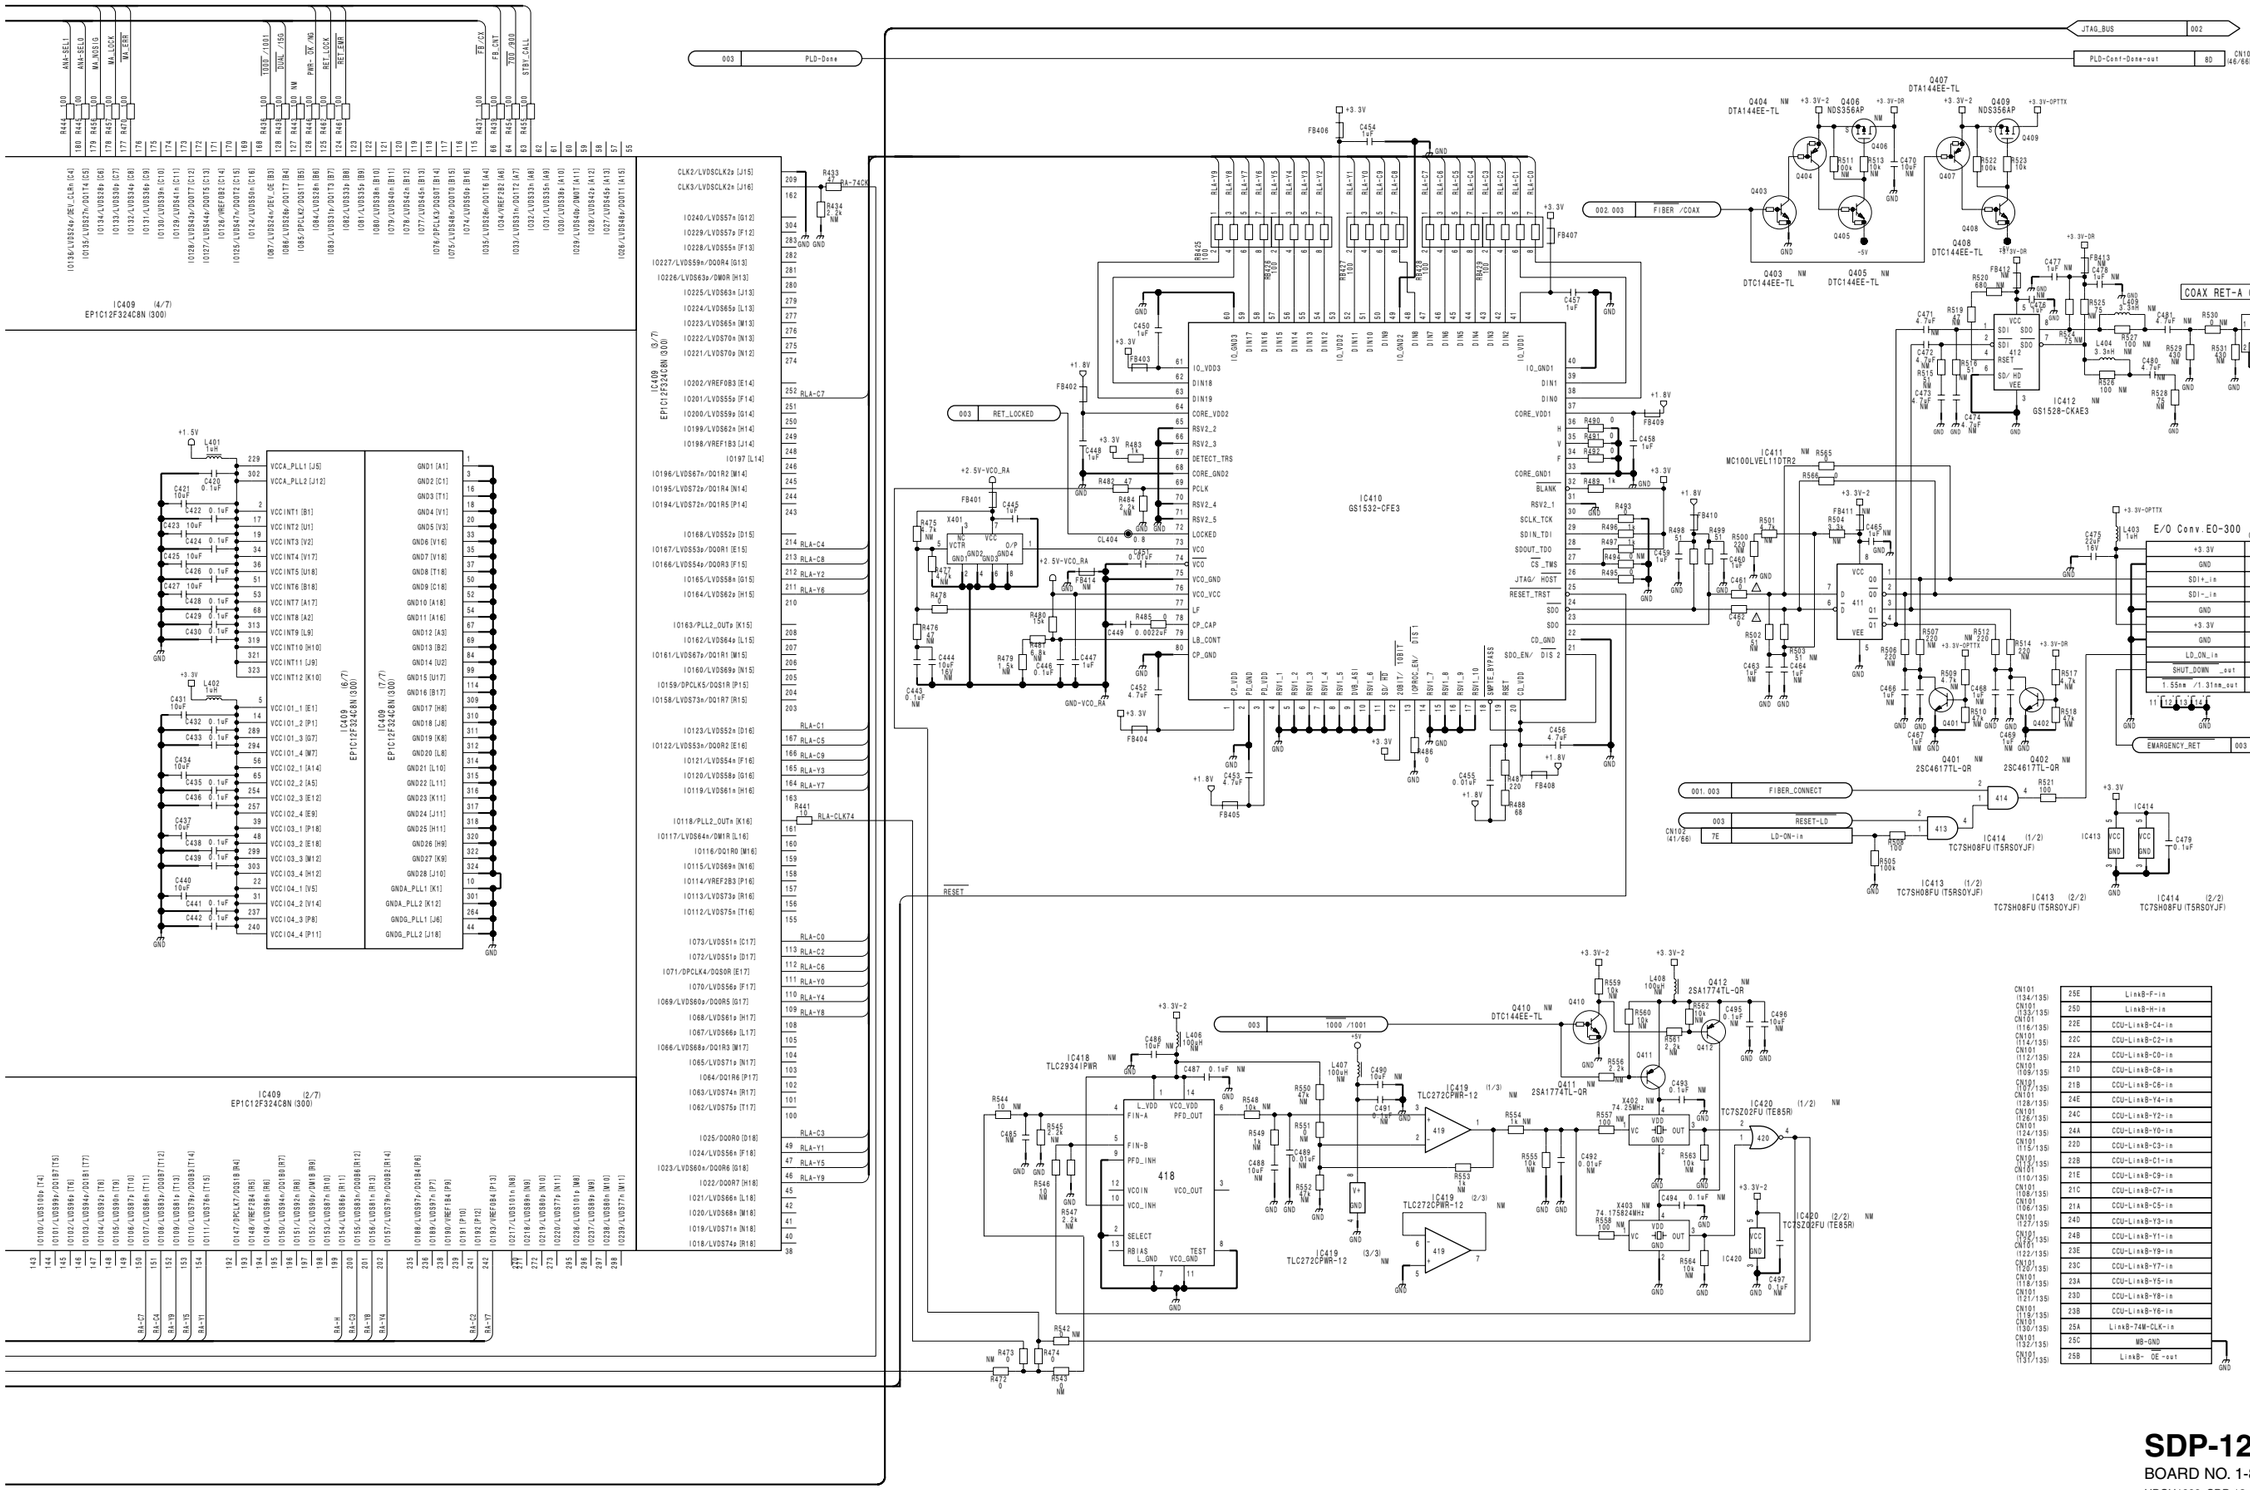

25E	LinxB-F-in
25D	LinxB-H-in
22E	CCU-LinxB-C4-in
22C	CCU-LinxB-C2-in
22A	CCU-LinxB-C0-in
21D	CCU-LinxB-C8-in
21B	CCU-LinxB-C6-in
24E	CCU-LinxB-Y4-in
24C	CCU-LinxB-Y2-in
24A	CCU-LinxB-Y0-in
22D	CCU-LinxB-C3-in
22B	CCU-LinxB-C1-in
21E	CCU-LinxB-C9-in
21C	CCU-LinxB-C7-in
21A	CCU-LinxB-C5-in
24D	CCU-LinxB-Y3-in
24B	CCU-LinxB-Y1-in
23E	CCU-LinxB-Y9-in
23C	CCU-LinxB-Y7-in
23A	CCU-LinxB-Y5-in
23D	CCU-LinxB-Y8-in
23B	CCU-LinxB-Y6-in
25A	LinxB-74W-CLK-in
25C	MB-GND
25B	LinxB- OE-out

SDP-12 (3/3)
BOARD NO. 1-867-881-11
HDCU1000_SDP-12_011_3

SDP-12 (1/3)
SUFFIX: -12, -13, -14, -31

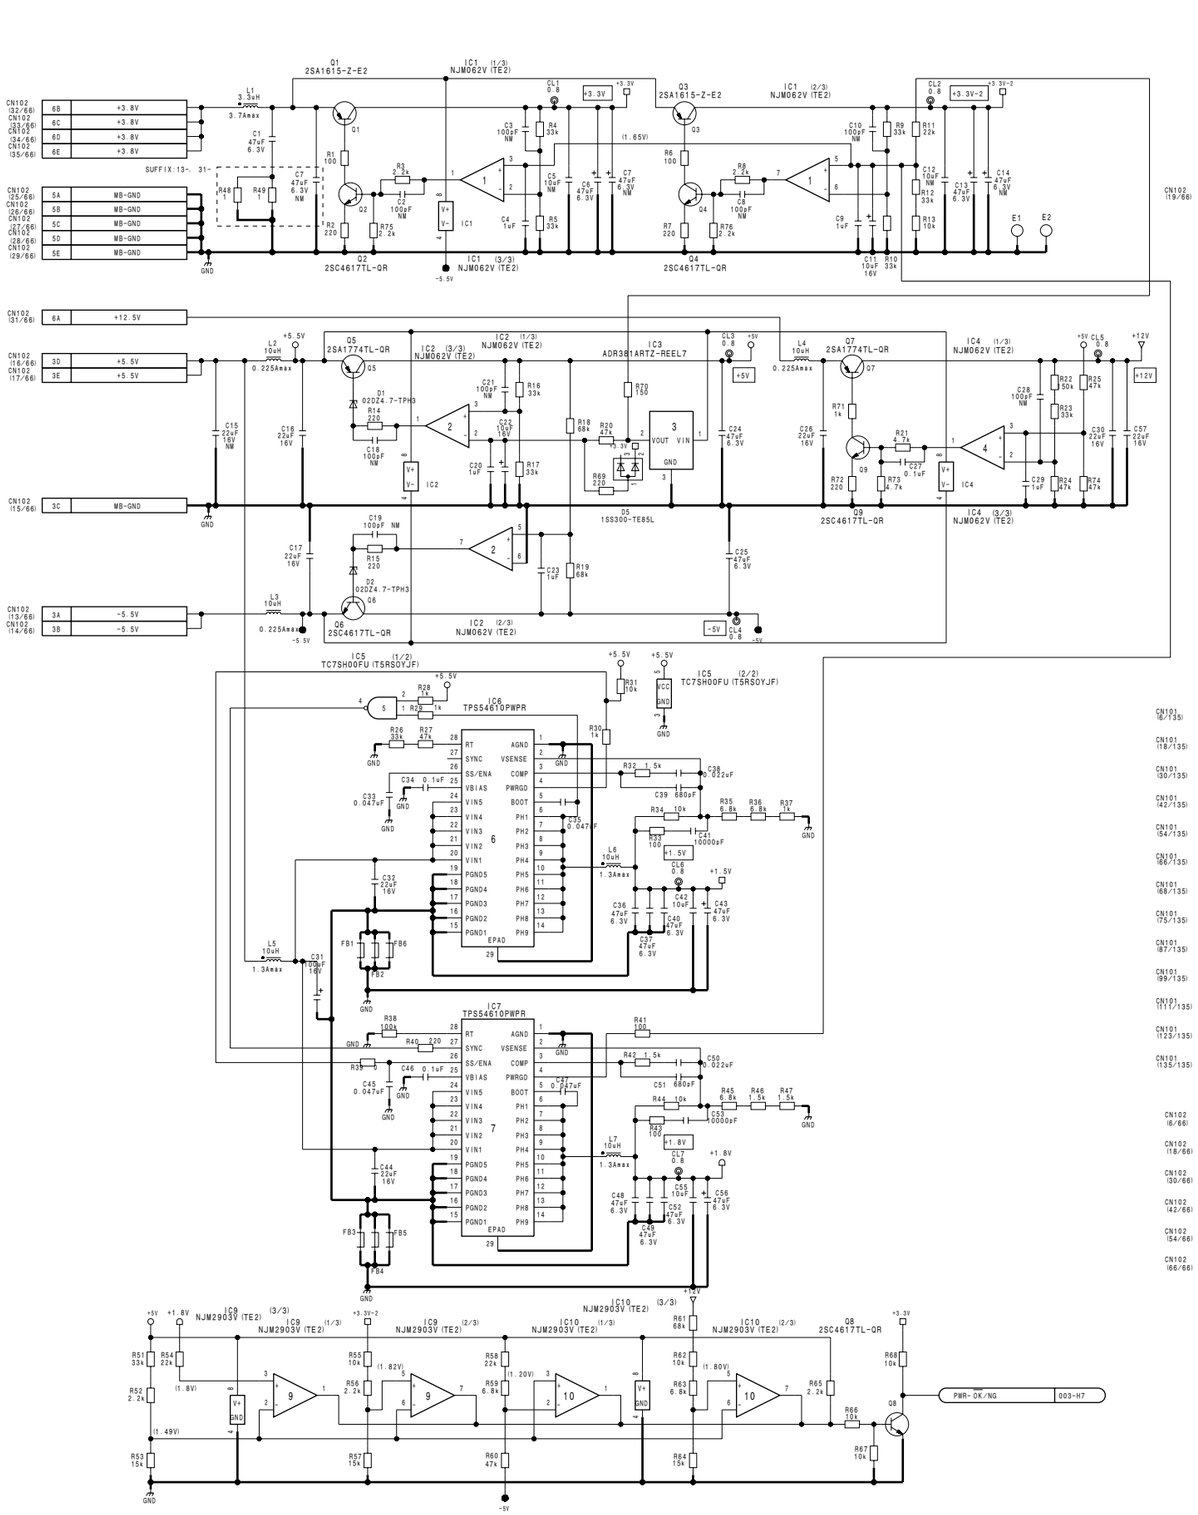

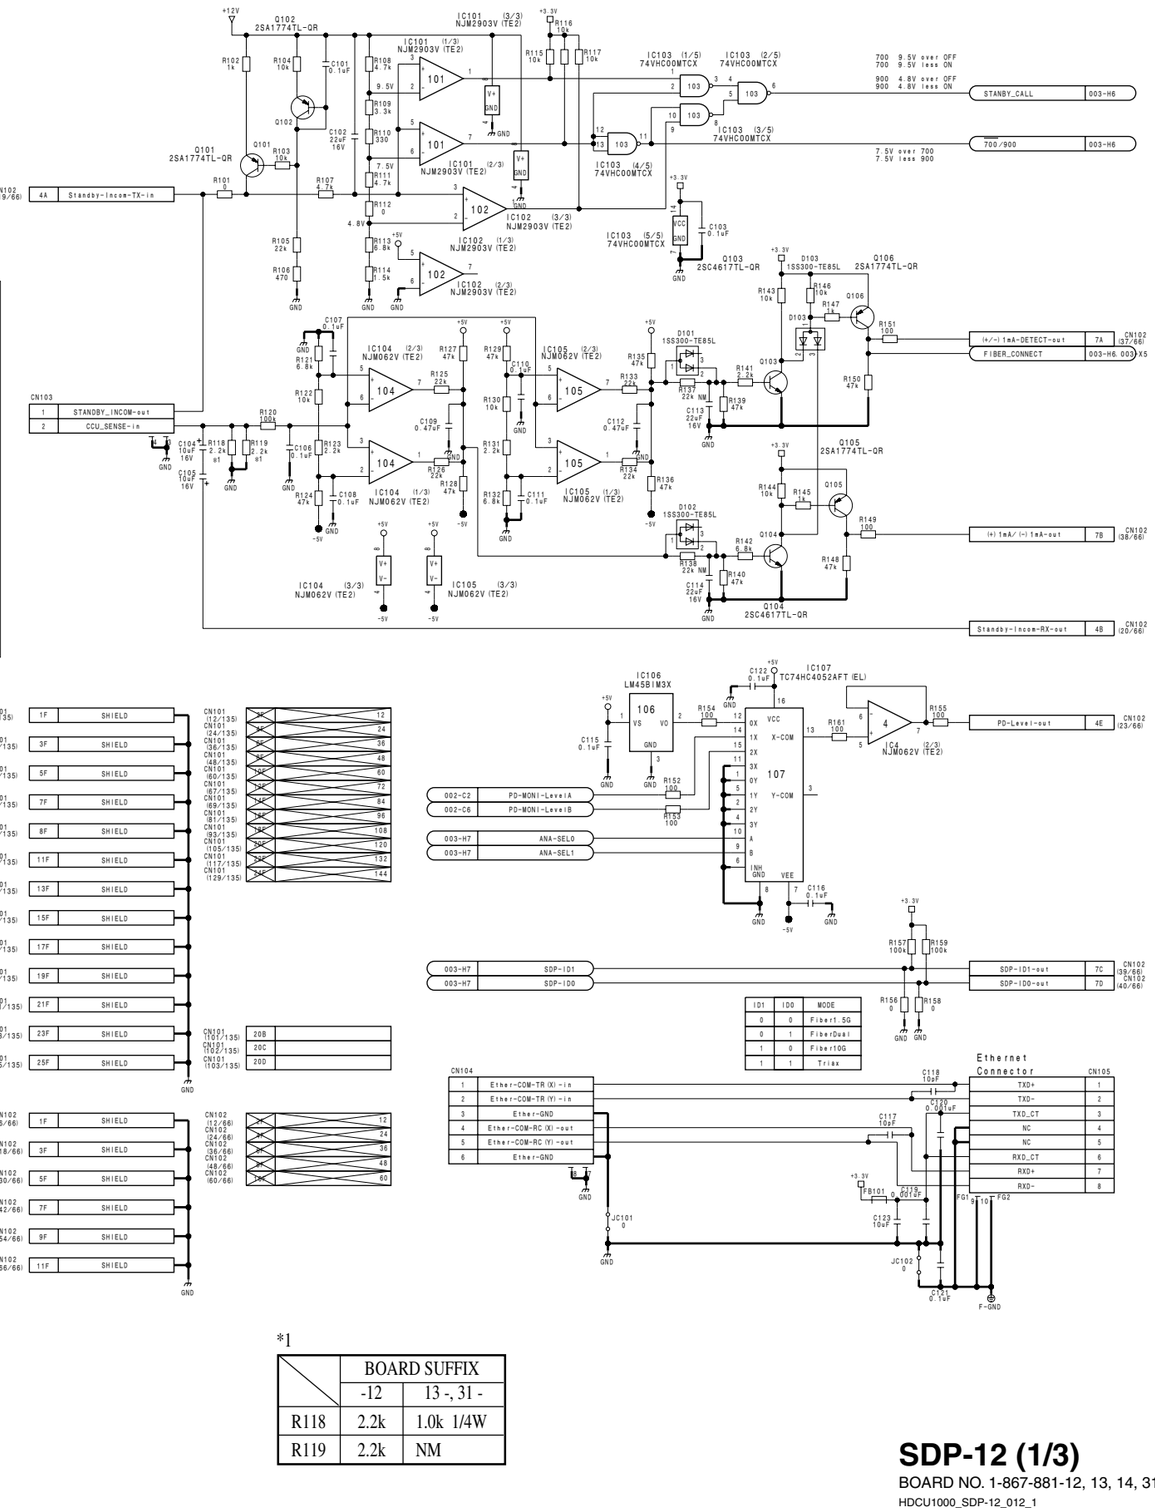

*1

	BOARD SUFFIX	
	-12	13 -, 31 -
R118	2.2k	1.0k 1/4W
R119	2.2k	NM

SDP-12 (1/3)
BOARD NO. 1-867-881-12, 13, 14, 31
HDCU1000_SDP-12_012_1

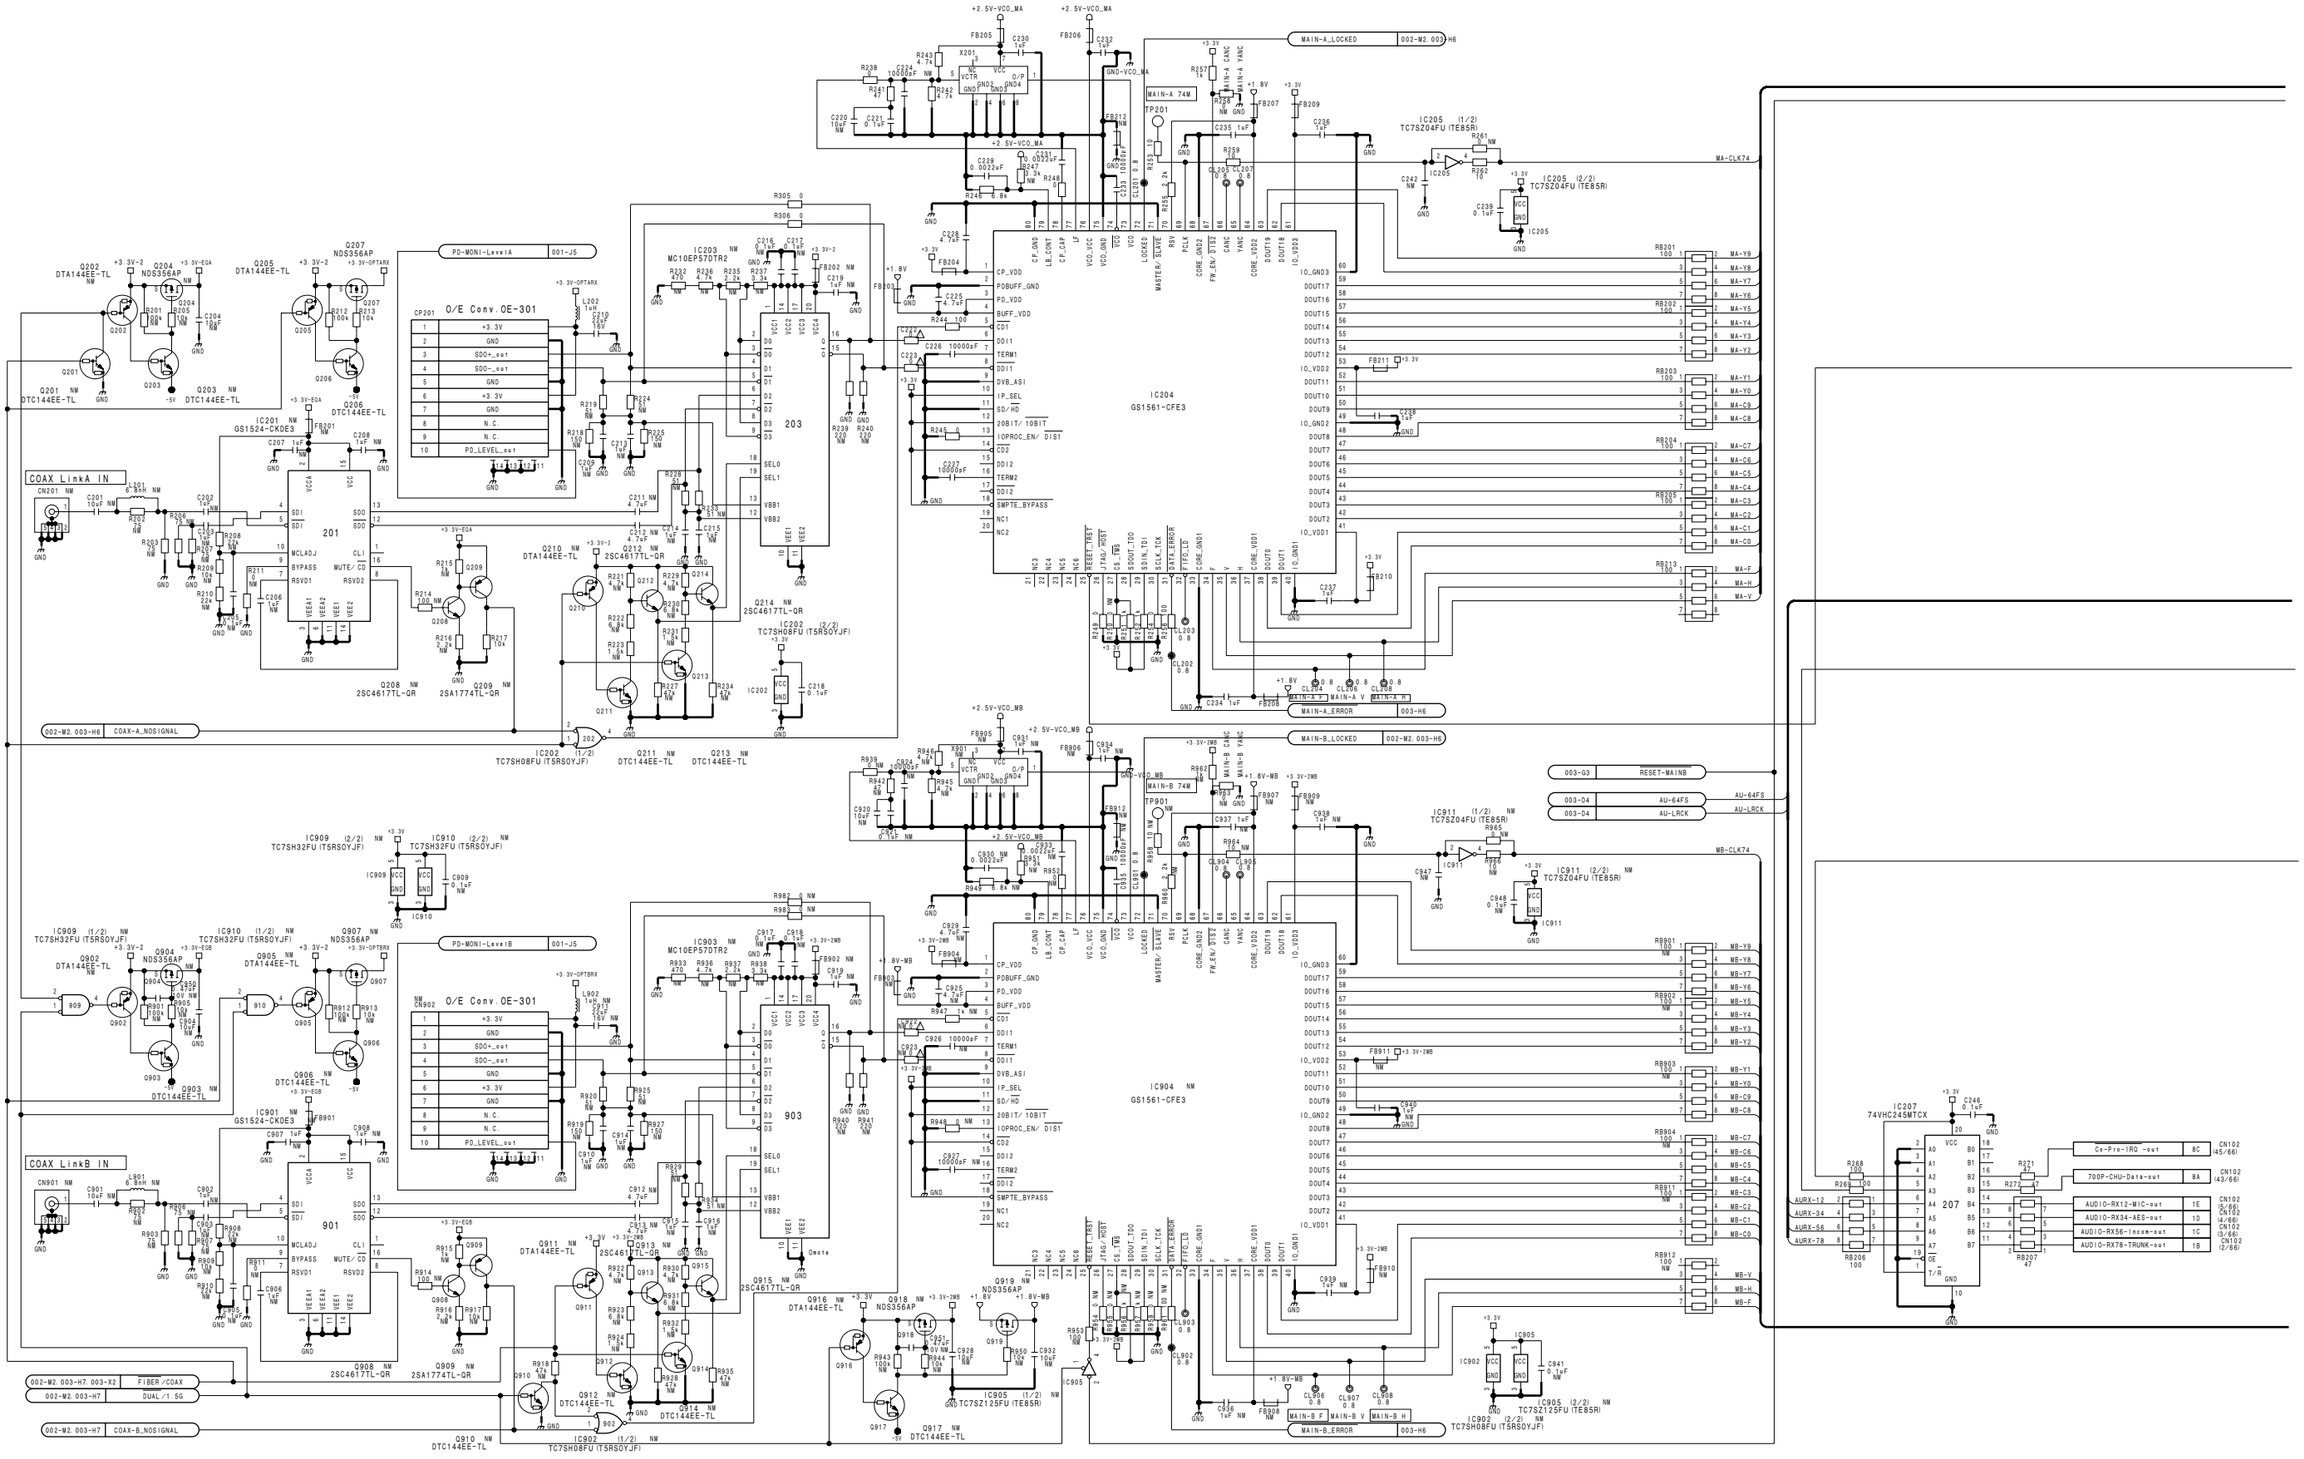
IC204 GS1561-CFE3
IC904 GS1561-CFE3
IC203 MC10EP57DTR2
IC903 MC10EP57DTR2
IC201 GS1524-CKDE3
IC901 GS1524-CKDE3
O/E Conv.OE-301
COAX LinkA IN
COAX LinkB IN
MAIN-A_LOCKED
MAIN-B_LOCKED
MAIN-A_ERROR
MAIN-B_ERROR
RESET-MAINB
AU-64FS
AU-LRCK
MA-CLK74
MB-CLK74
74VHC245MTCX
TC7SZ04FU (TE85R)
TC7SH08FU (T5RS0YJF)
TC7SZ125FU (TE85R)

SDP-12 (2/3)
SUFFIX: -12, -13, -31

COMMAND DEMUX

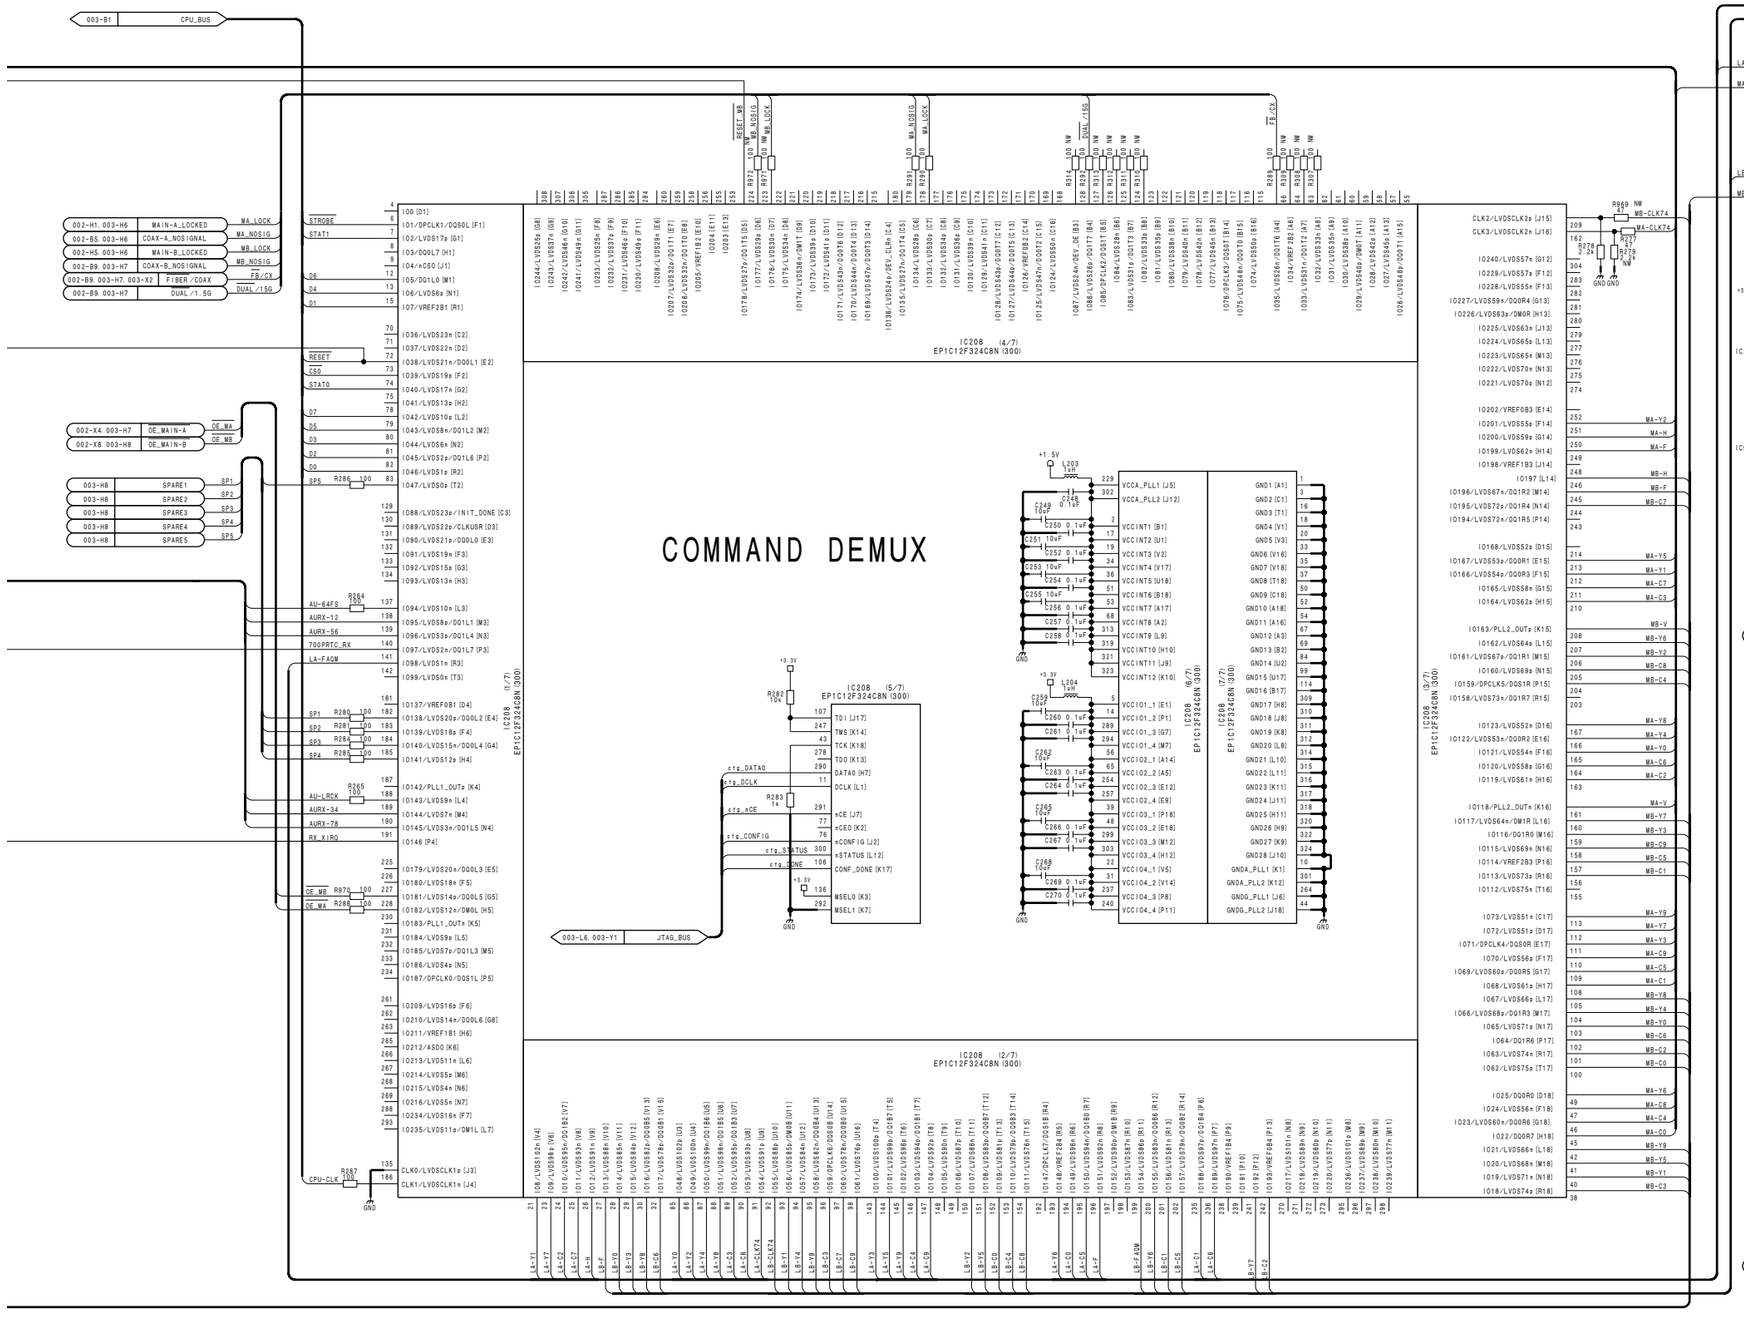

SDP-12 (2/3)

BOARD NO. 1-867-881-12, 13, 31

HDCU1000_SDP-12_012_2

COMMAND MUX

EPR

SDP-12 (3/3)
SUFFIX: -12, -13, -31

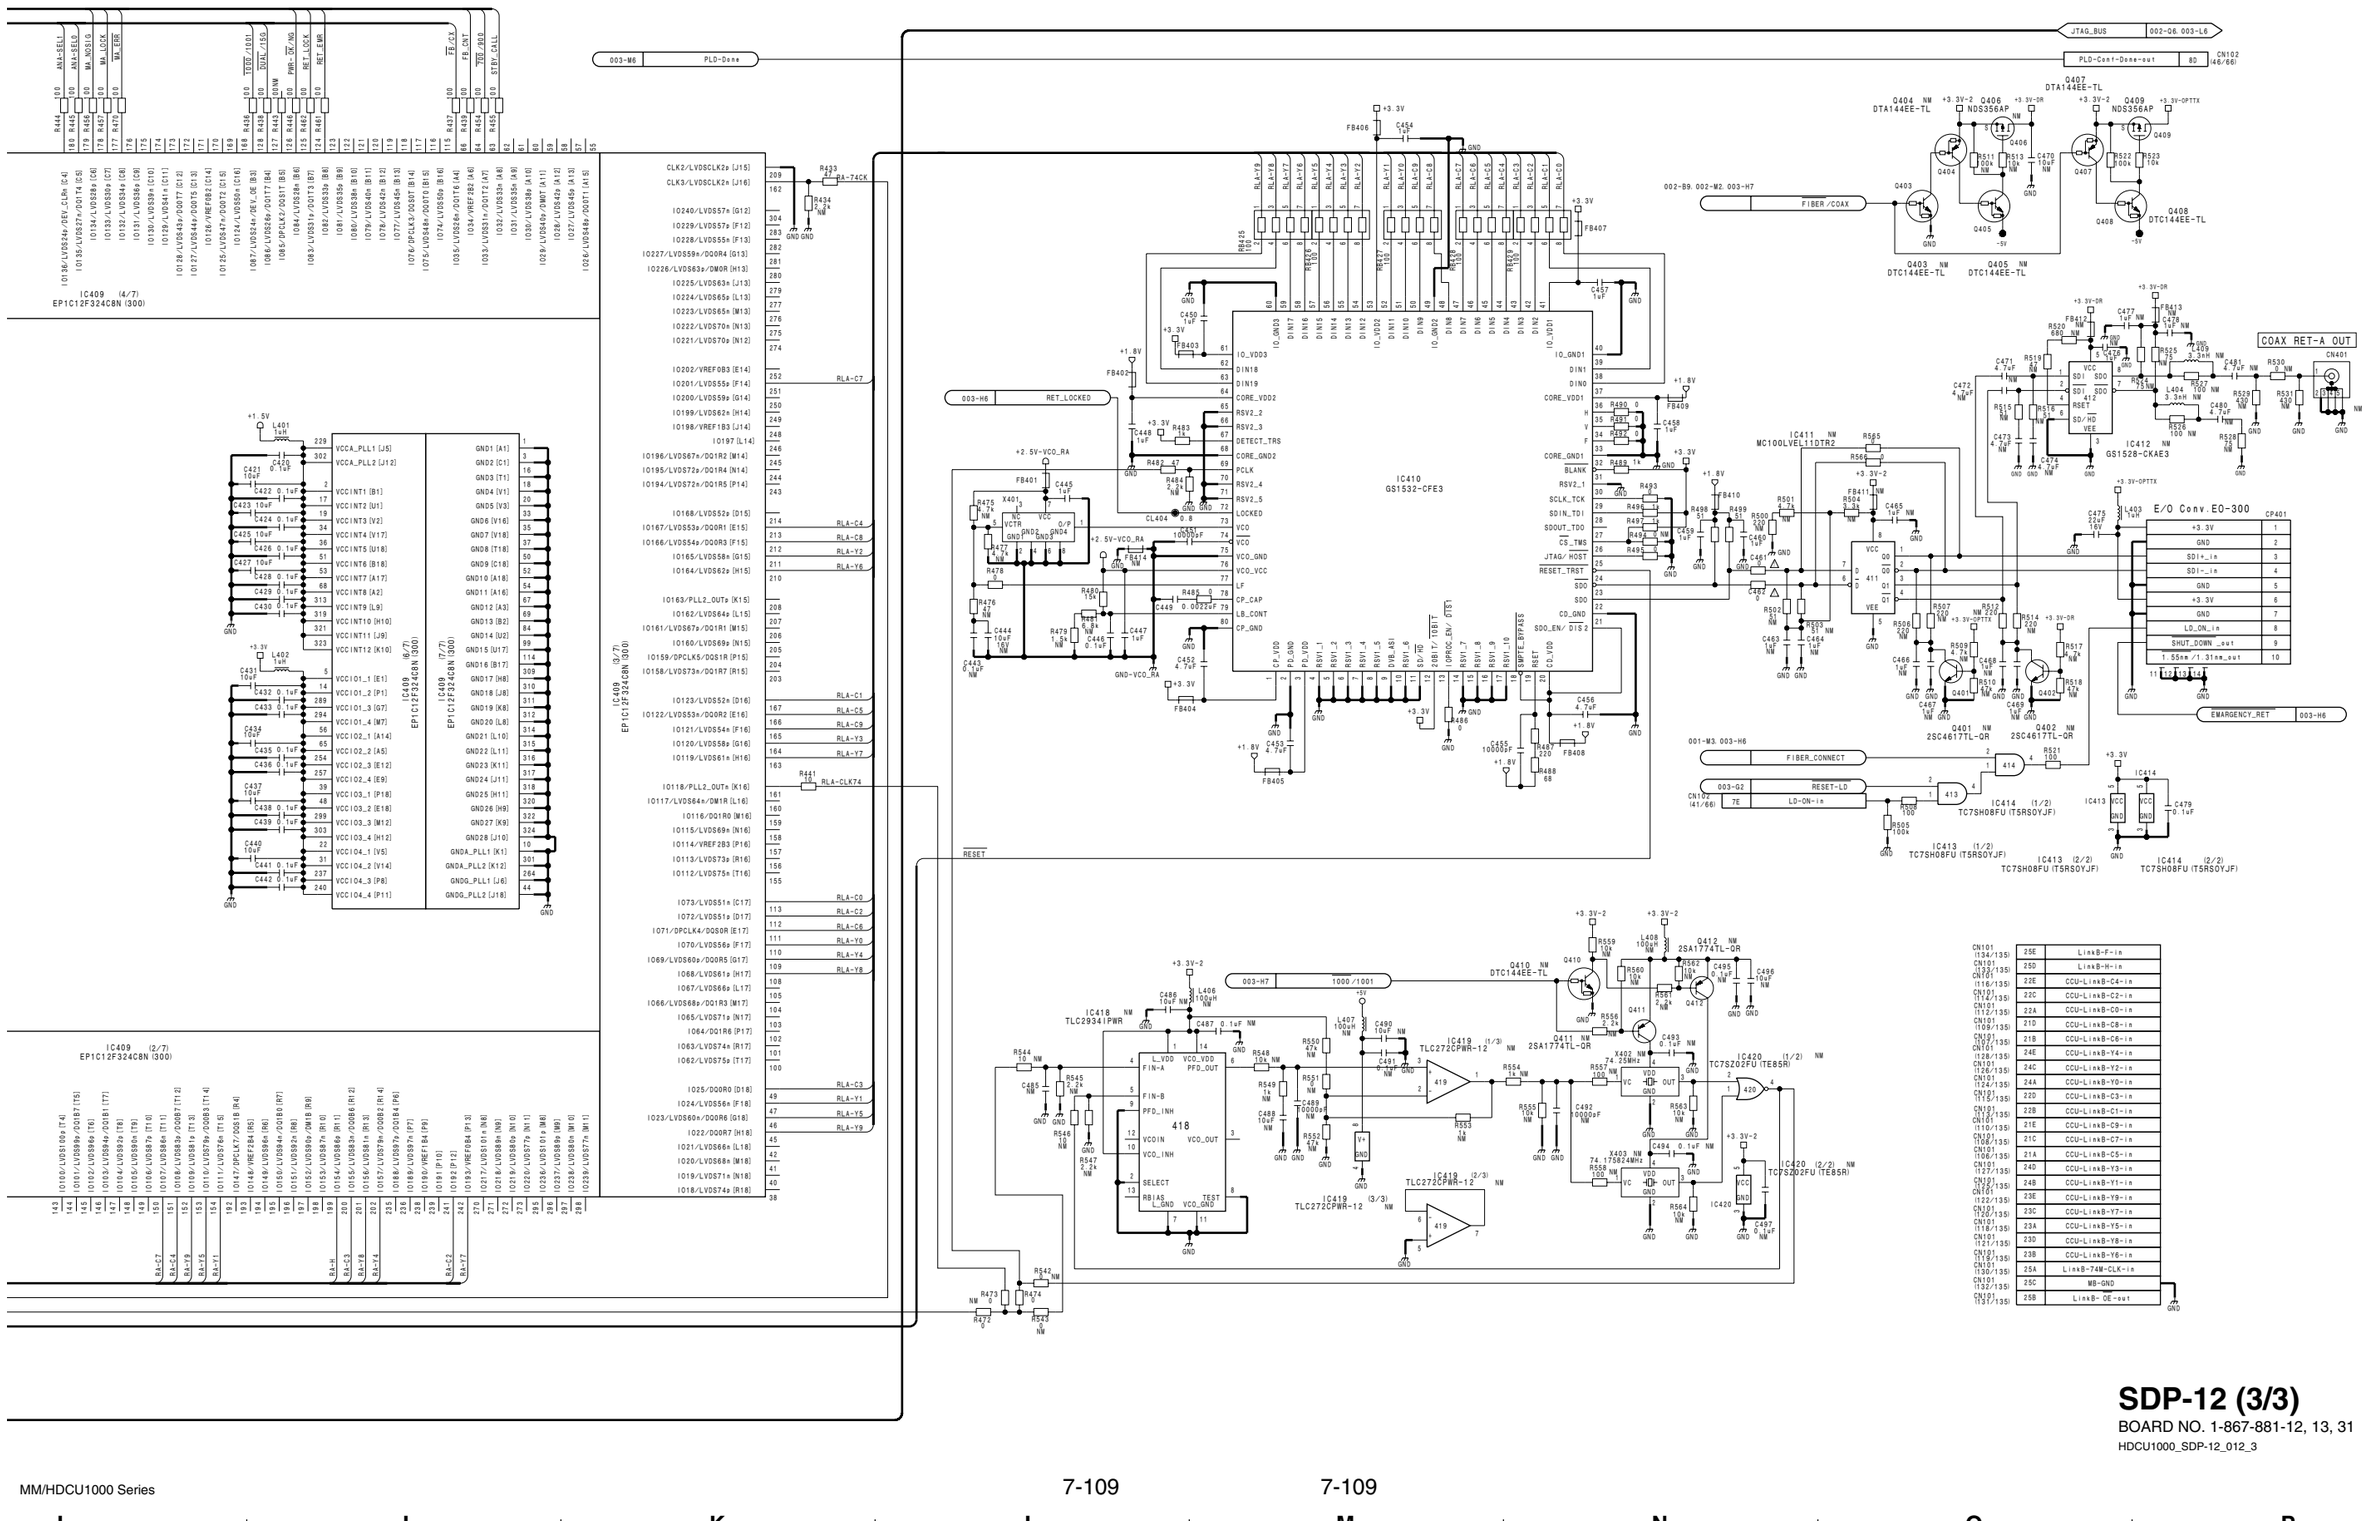

SDP-12 (3/3)
BOARD NO. 1-867-881-12, 13, 31
HDCU1000_SDP-12_012_3

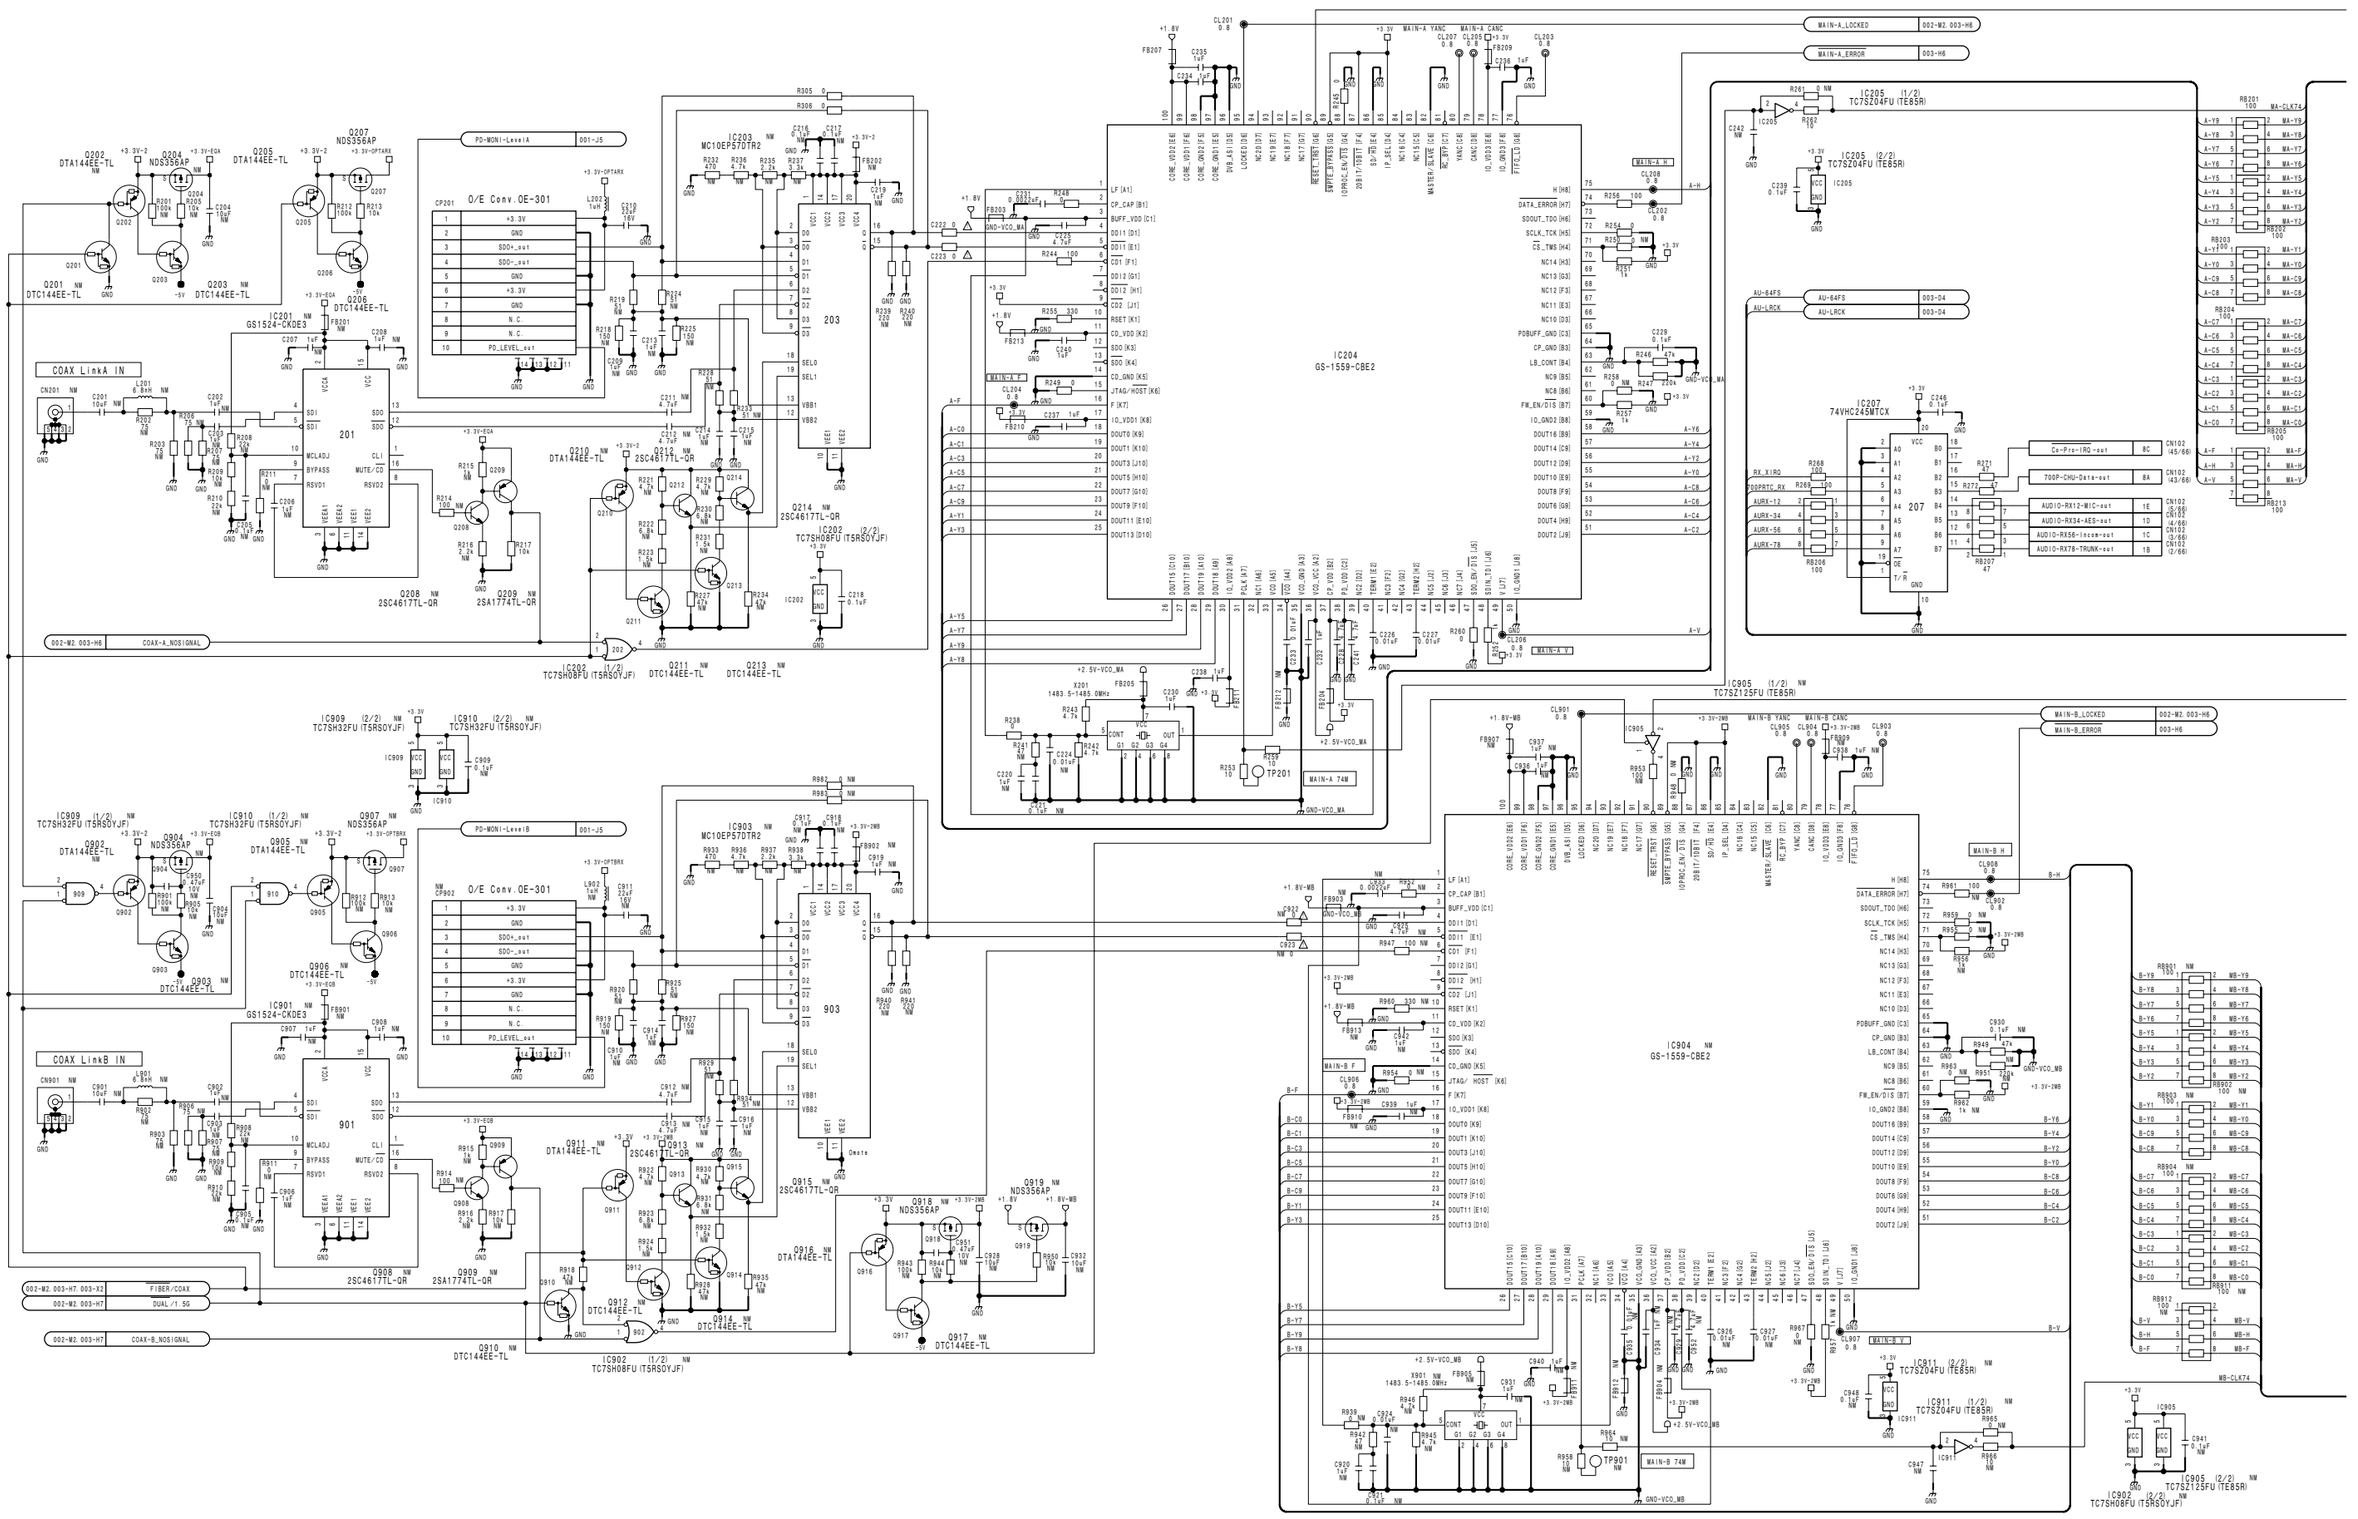
IC201 GS1524-CK0E3
IC203 MC10EP57DTR2
IC204 GS-1559-CBE2
IC205 (1/2) TC7SZ04FU (TE85R)
IC205 (2/2) TC7SZ04FU (TE85R)
IC207 74VHC245MTCX
IC901 GS1524-CK0E3
IC903 MC10EP57DTR2
IC904 GS-1559-CBE2
IC905 (1/2) TC7SZ125FU (TE85R)
IC905 (2/2) TC7SZ125FU (TE85R)
IC911 (1/2) TC7SZ04FU (TE85R)
COAX LinkA IN
COAX LinkB IN
O/E Conv.OE-301
PD-MON1-LevelA
PD-MON1-LevelB
MAIN-A_LOCKED
MAIN-A_ERROR
MAIN-B_LOCKED
MAIN-B_ERROR
AU-64FS
AU-LRCK
COAX-A_NOSIGNAL
COAX-B_NOSIGNAL
FIBER/COAX
DUAL/1.5G
MAIN-A 74M
MAIN-B 74M
TP201
TP901

SDP-12 (2/3)
SUFFIX: -14

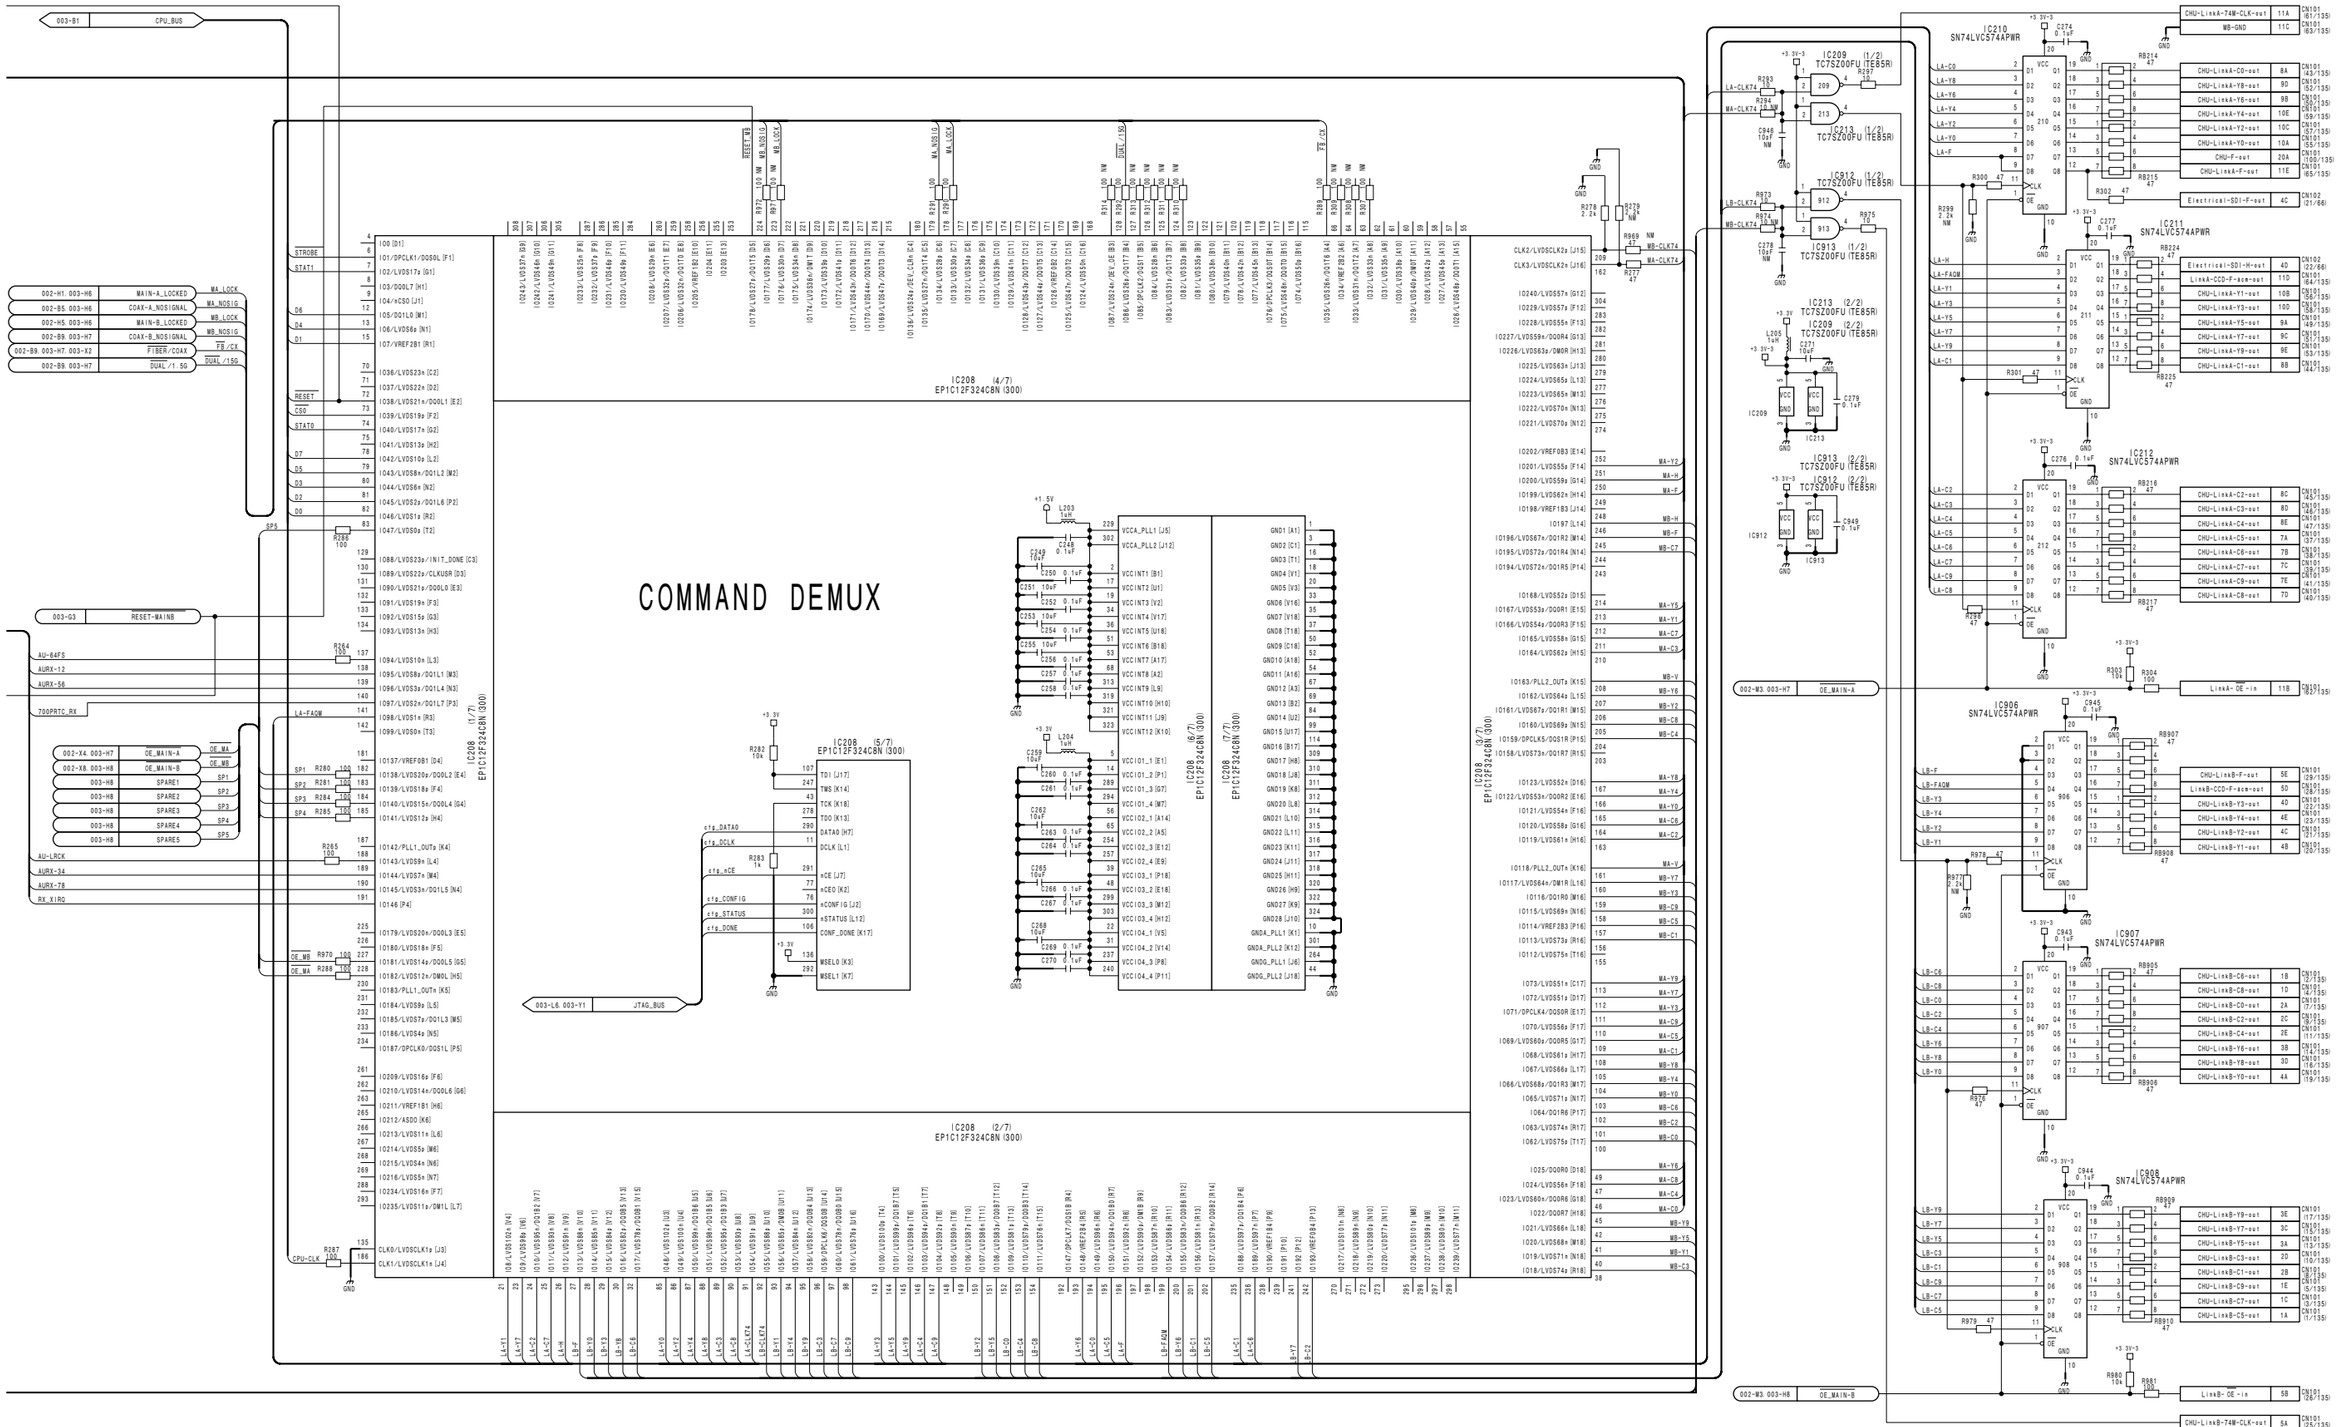

I	J	K	L	M	N	O	P

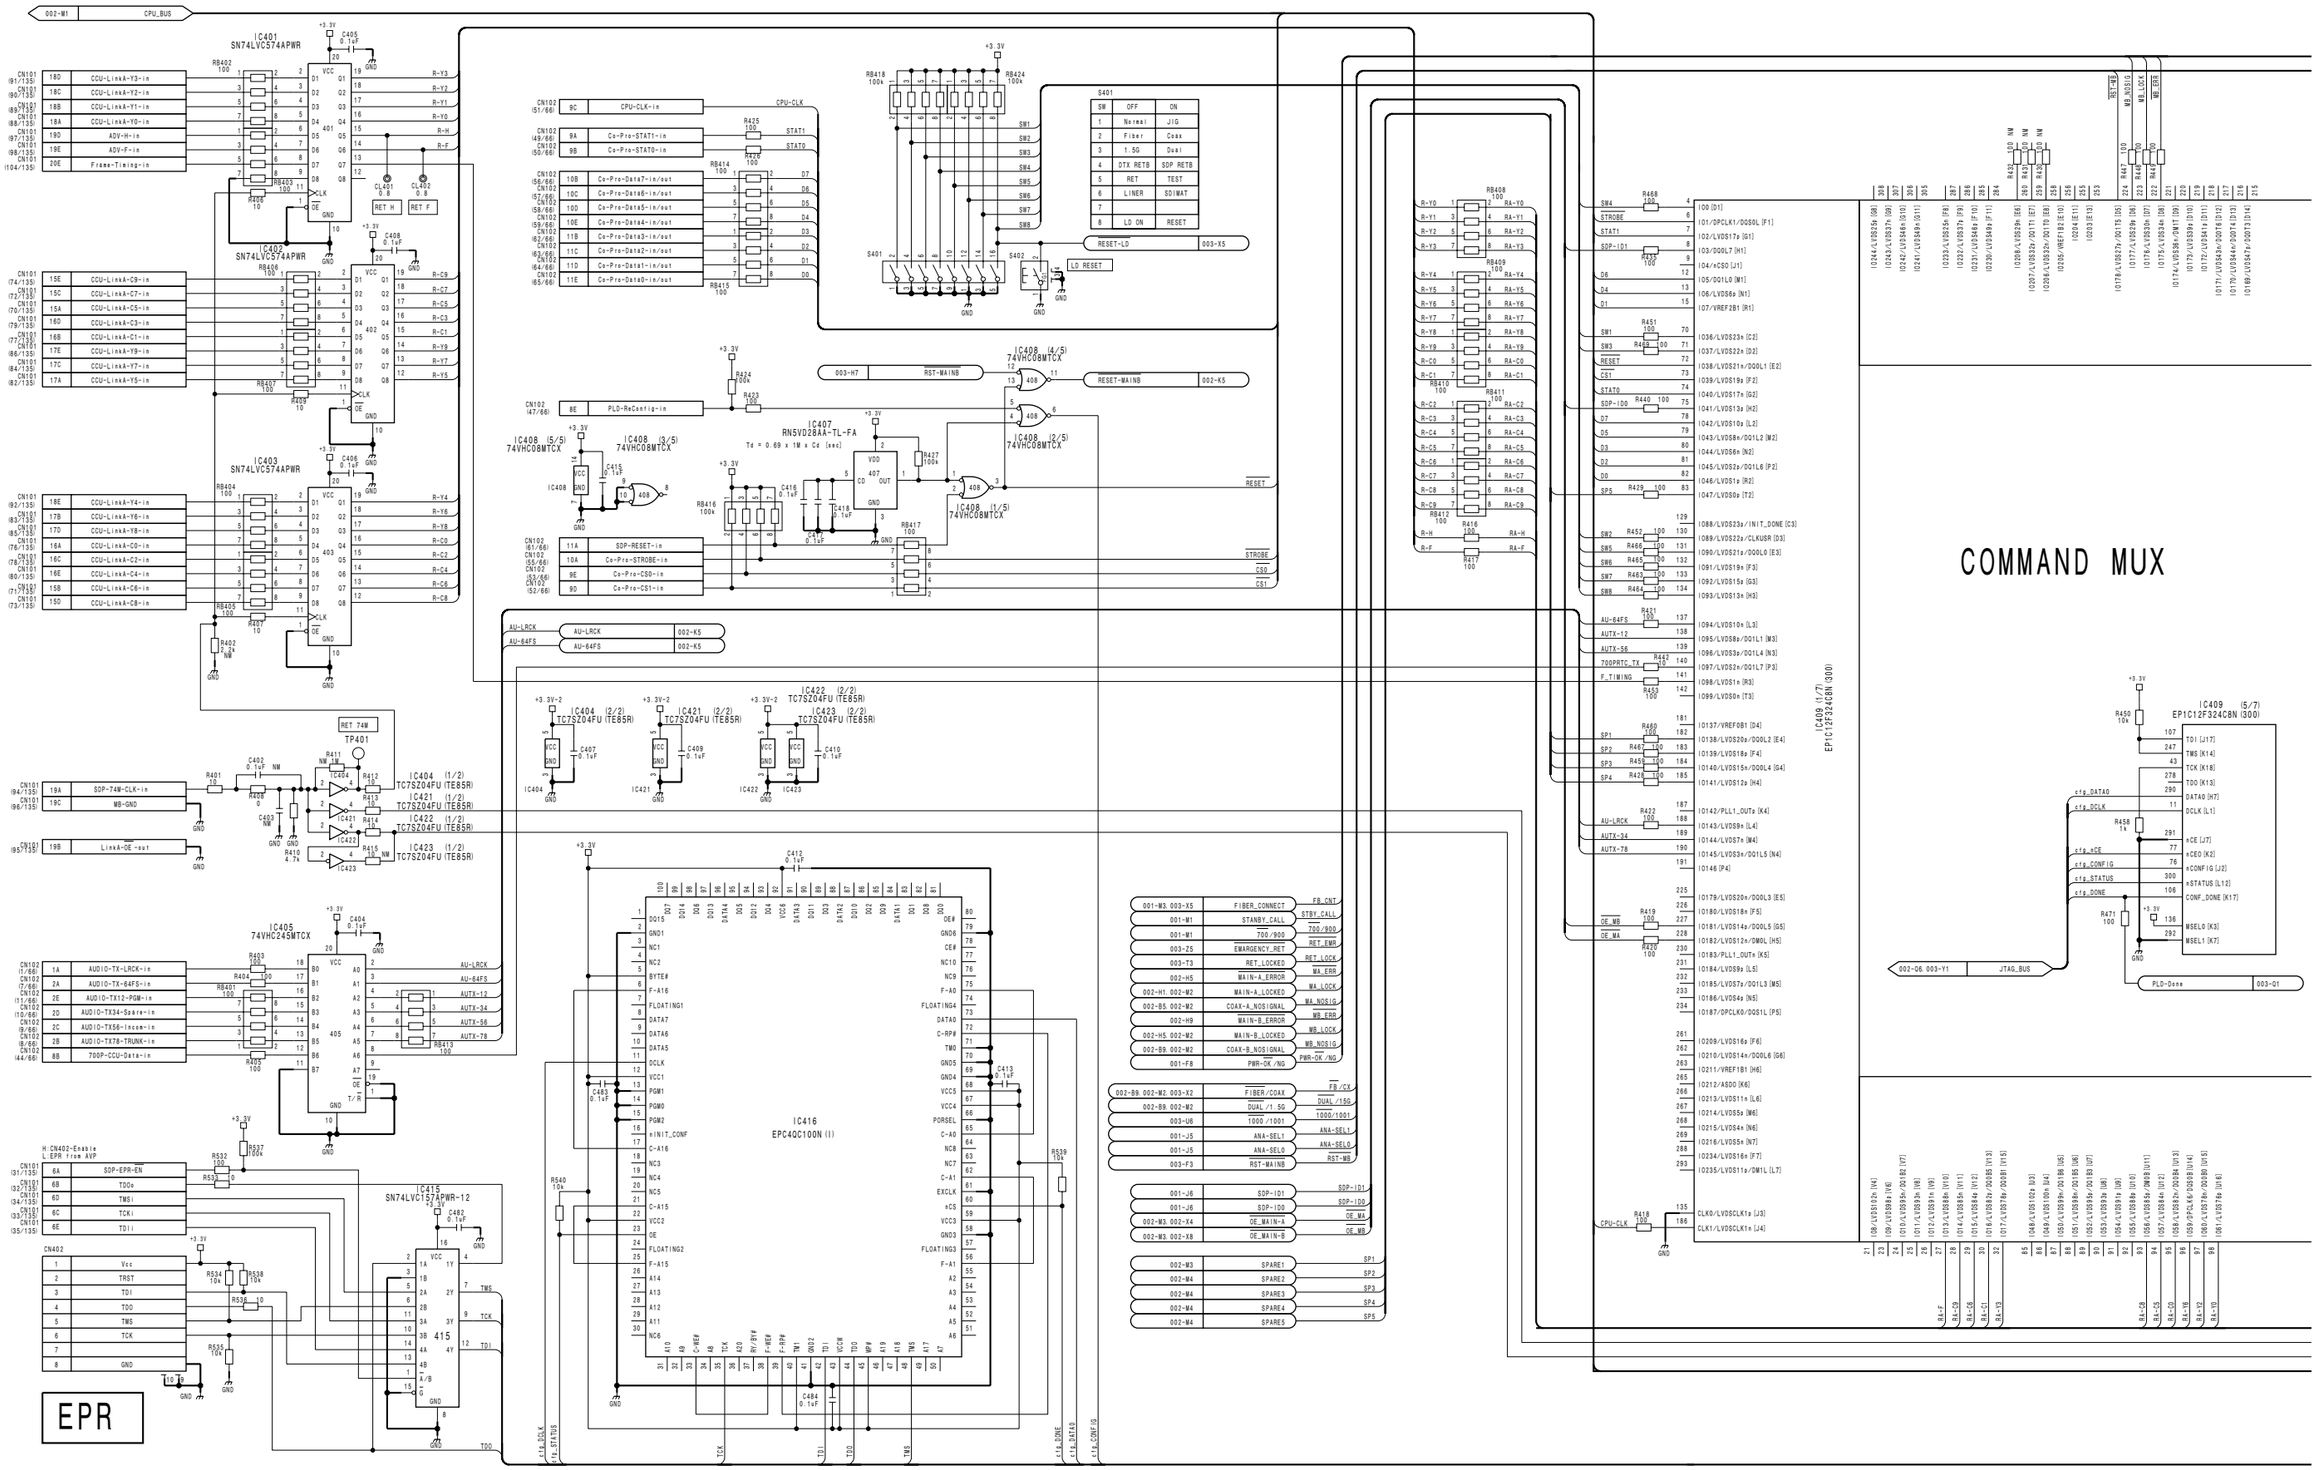
COMMAND MUX
EPR
IC401 SN74LVC574APWR
IC402 SN74LVC574APWR
IC403 SN74LVC574APWR
IC404 (1/2) TC7SZ04FU (TE85R)
IC421 (1/2) TC7SZ04FU (TE85R)
IC422 (1/2) TC7SZ04FU (TE85R)
IC423 (1/2) TC7SZ04FU (TE85R)
IC404 (2/2) TC7SZ04FU (TE85R)
IC421 (2/2) TC7SZ04FU (TE85R)
IC422 (2/2) TC7SZ04FU (TE85R)
IC423 (2/2) TC7SZ04FU (TE85R)
IC405 74VHC245MTCX
IC407 RN5VD28AA-TL-FA
IC408 (4/5) 74VHC08MTCX
IC408 (5/5) 74VHC08MTCX
IC408 (3/5) 74VHC08MTCX
IC408 (2/5) 74VHC08MTCX
IC408 (1/5) 74VHC08MTCX
IC409 (1/7) EP1C12F324C8N (300)
IC409 (5/7) EP1C12F324C8N (300)
IC415 SN74LVC157APWR-12
IC416 EPC4QC100N (I)
IC422 (2/2) TC7SZ04FU (TE85R)
CPU_BUS
RST-MAINB
RESET-MAINB
PLD_RsConfig-in
RESET
STROBE
CS0
CS1
AU-LRCK
AU-64FS
JTAG_BUS
PLD-Done
TMS
TCK
TDI
TDO

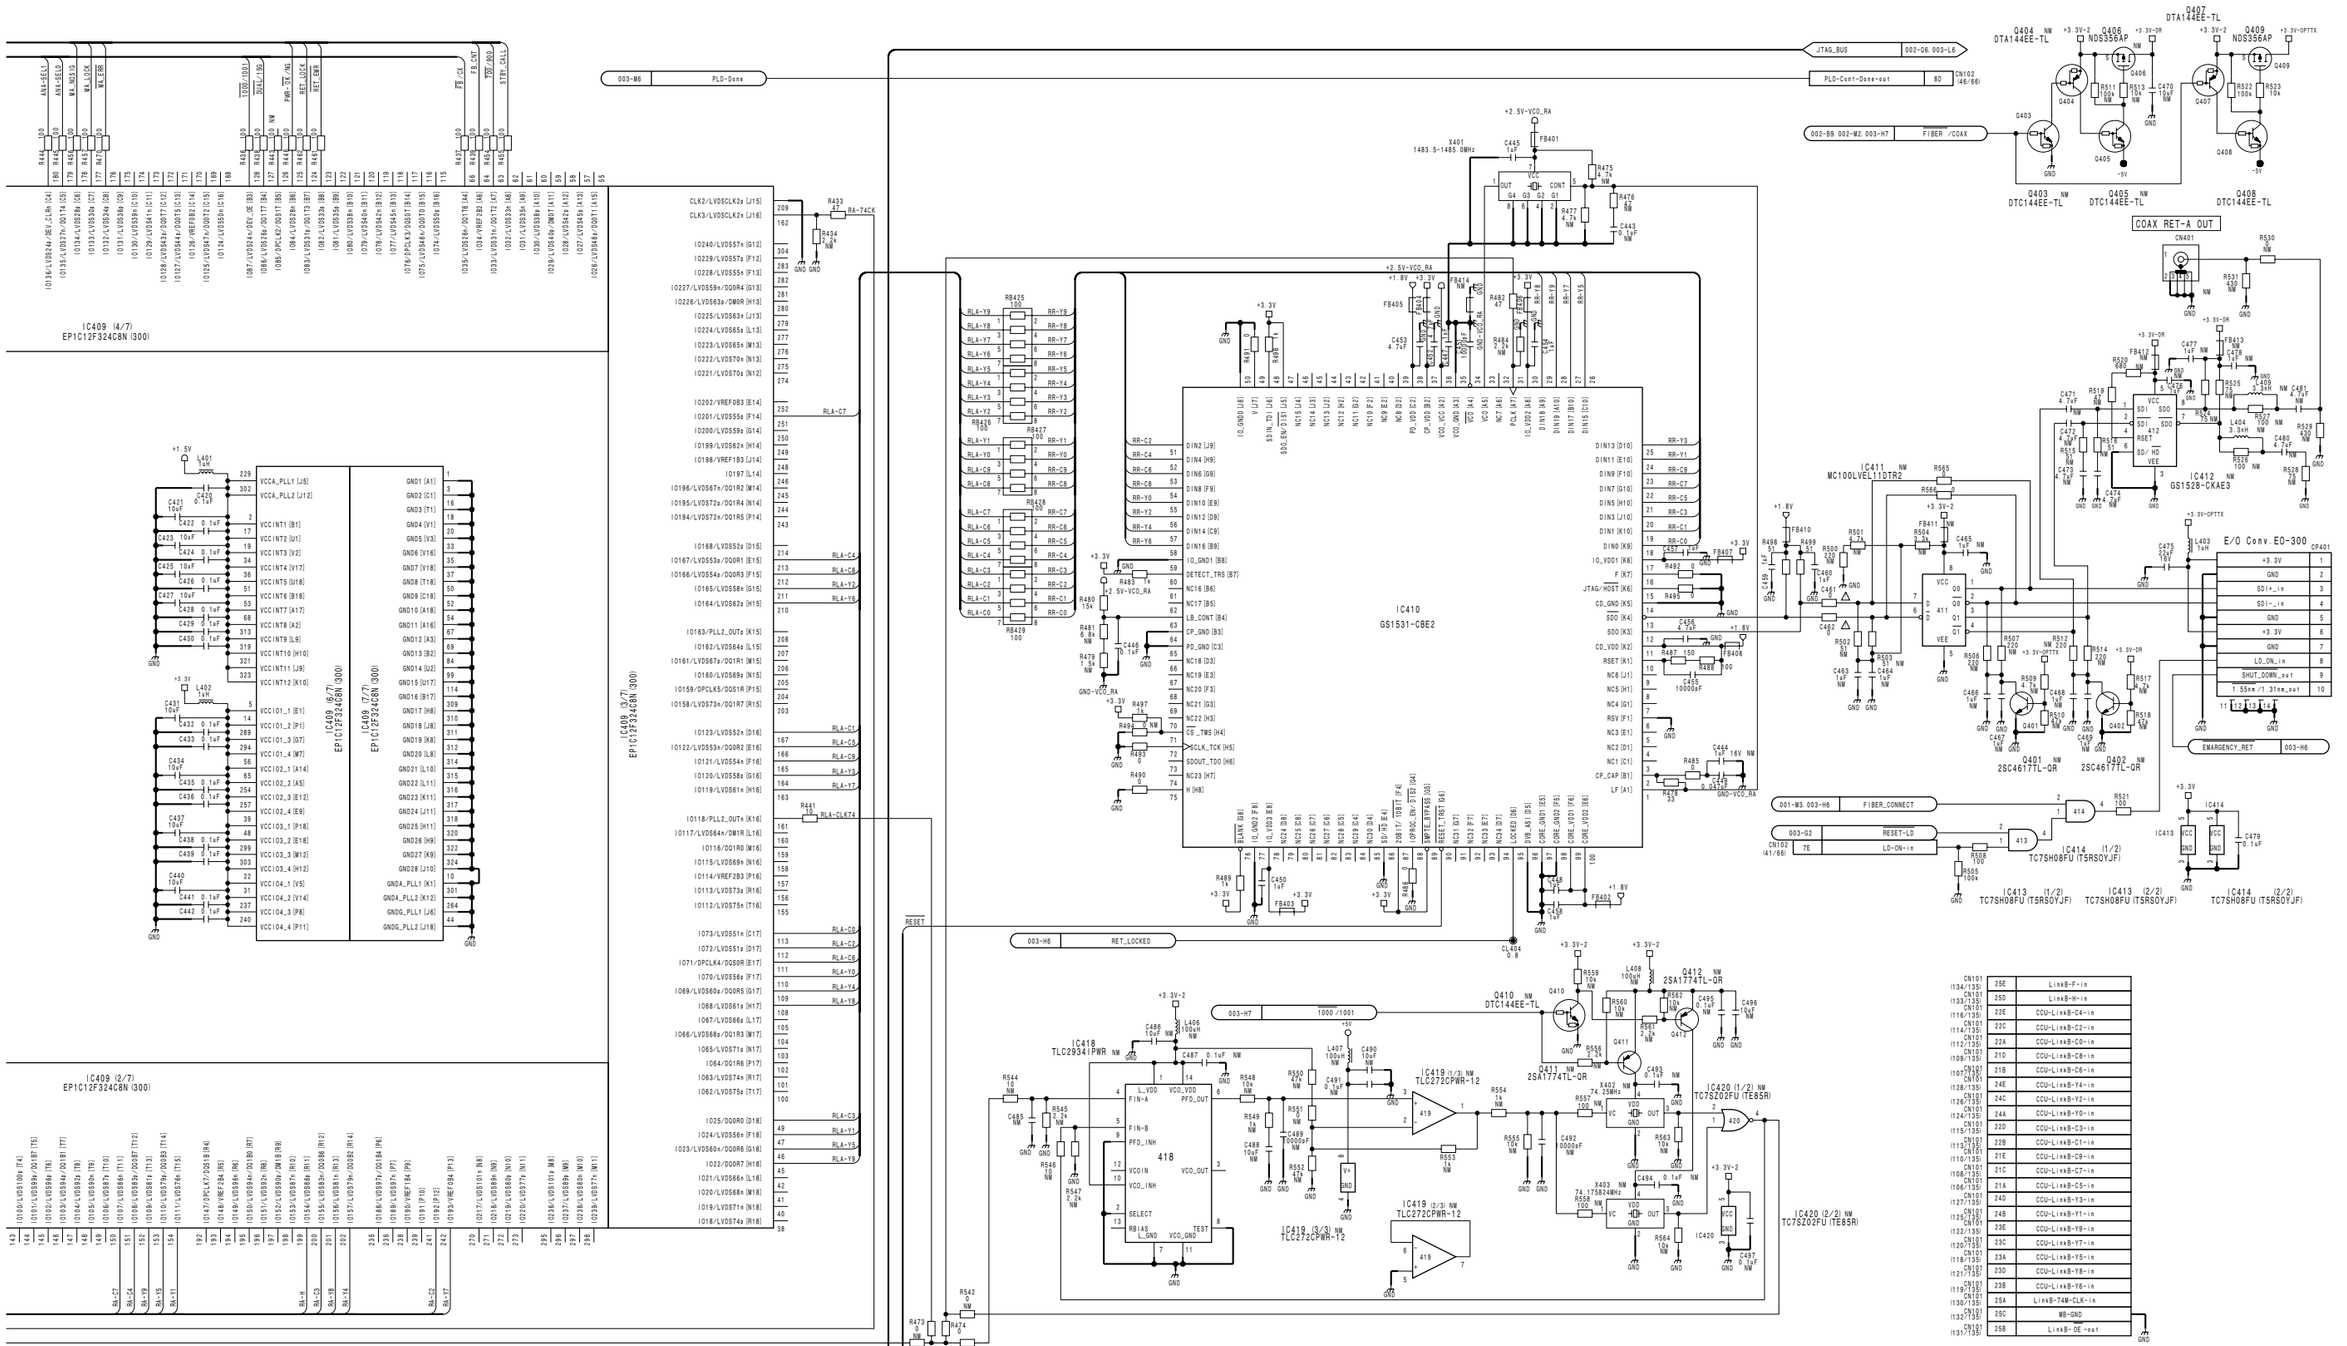

MM/HDCU1000 Series

7-109 (a)

7-109 (a)

SDP-12 (3/3)
BOARD NO. 1-867-881-14
HDCU1000_SDP-12_014_3

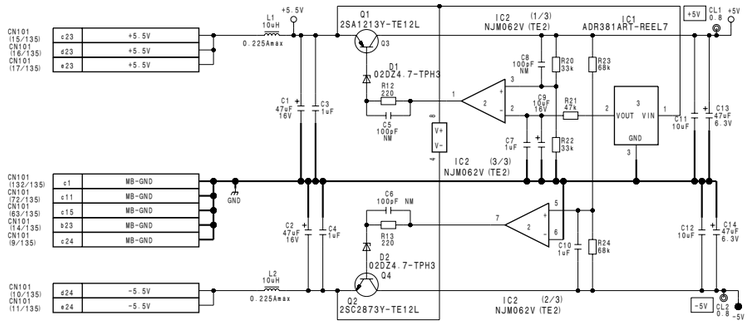



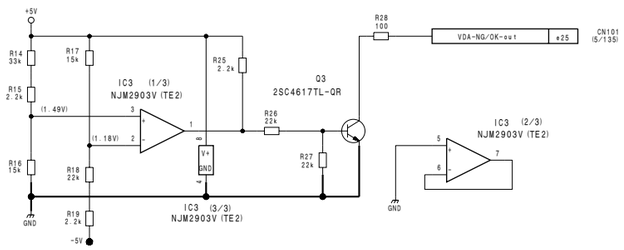

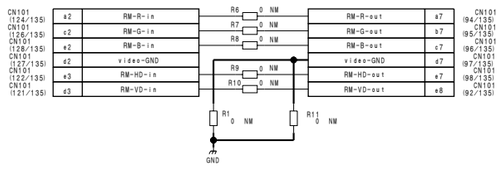

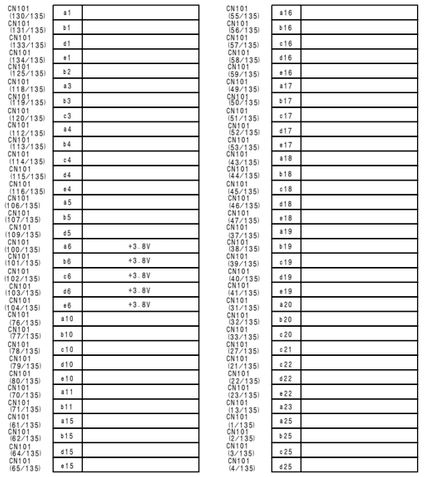

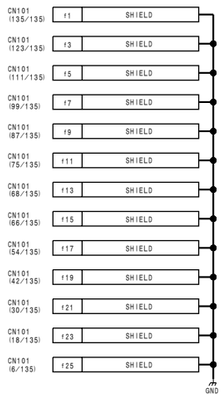



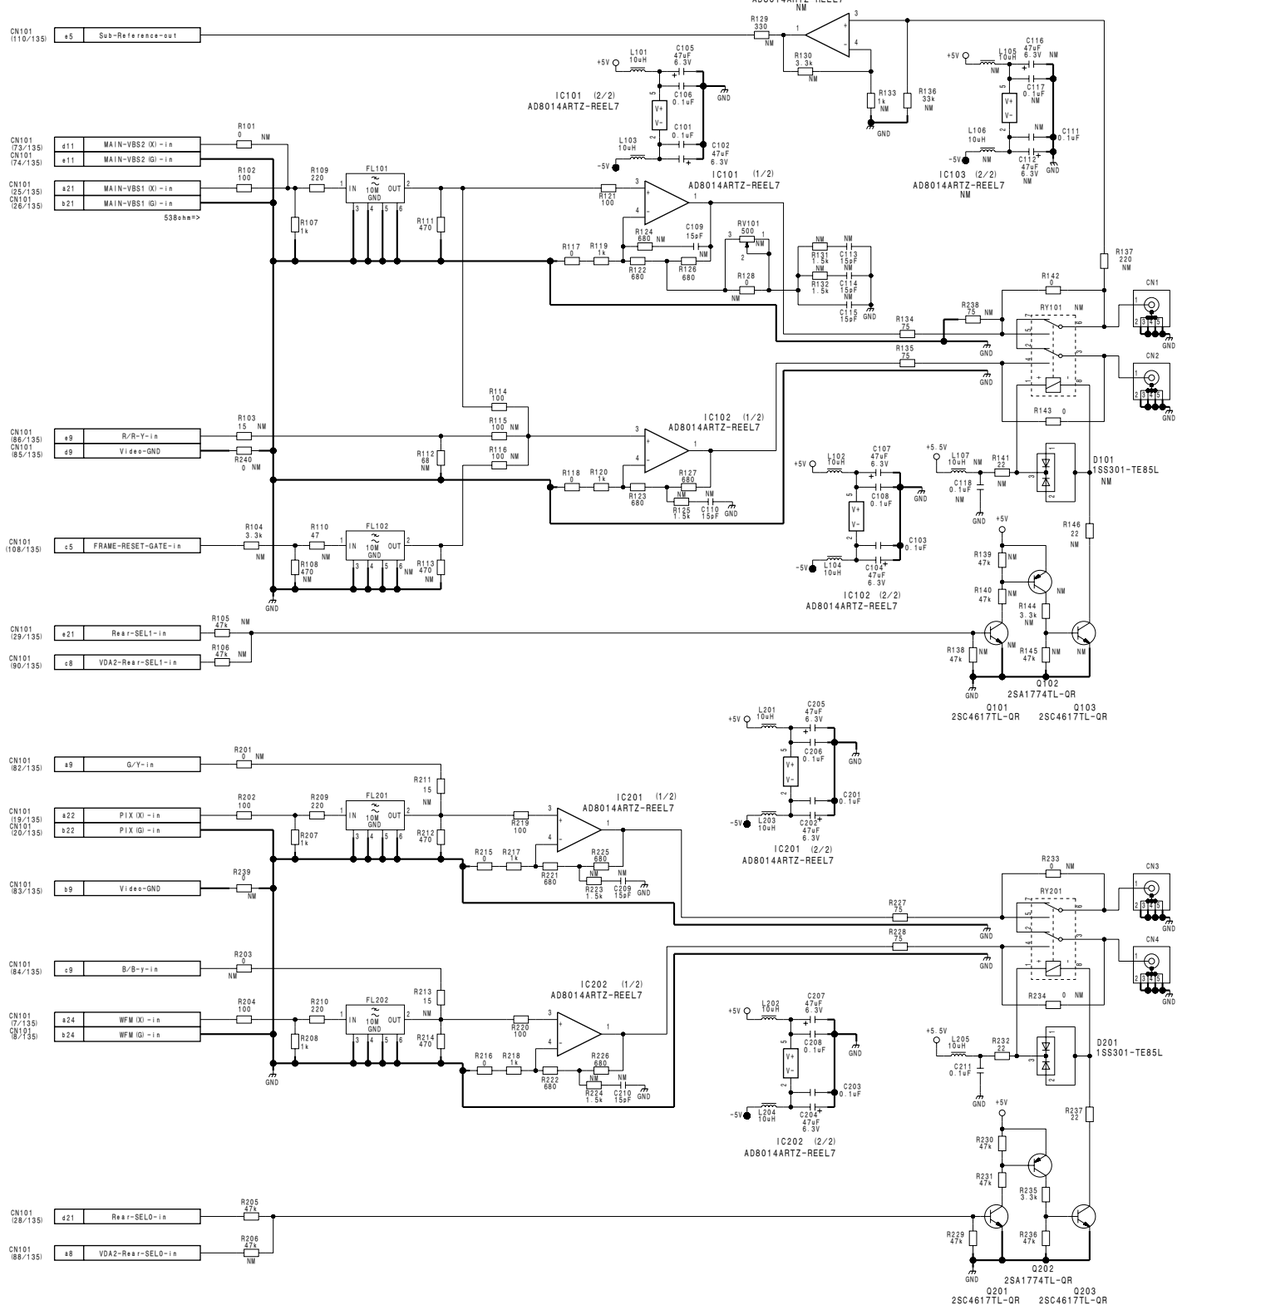

VDA-64A

BOARD NO. 1-868-003-11

HKCU1001_VDA-64A_011_1

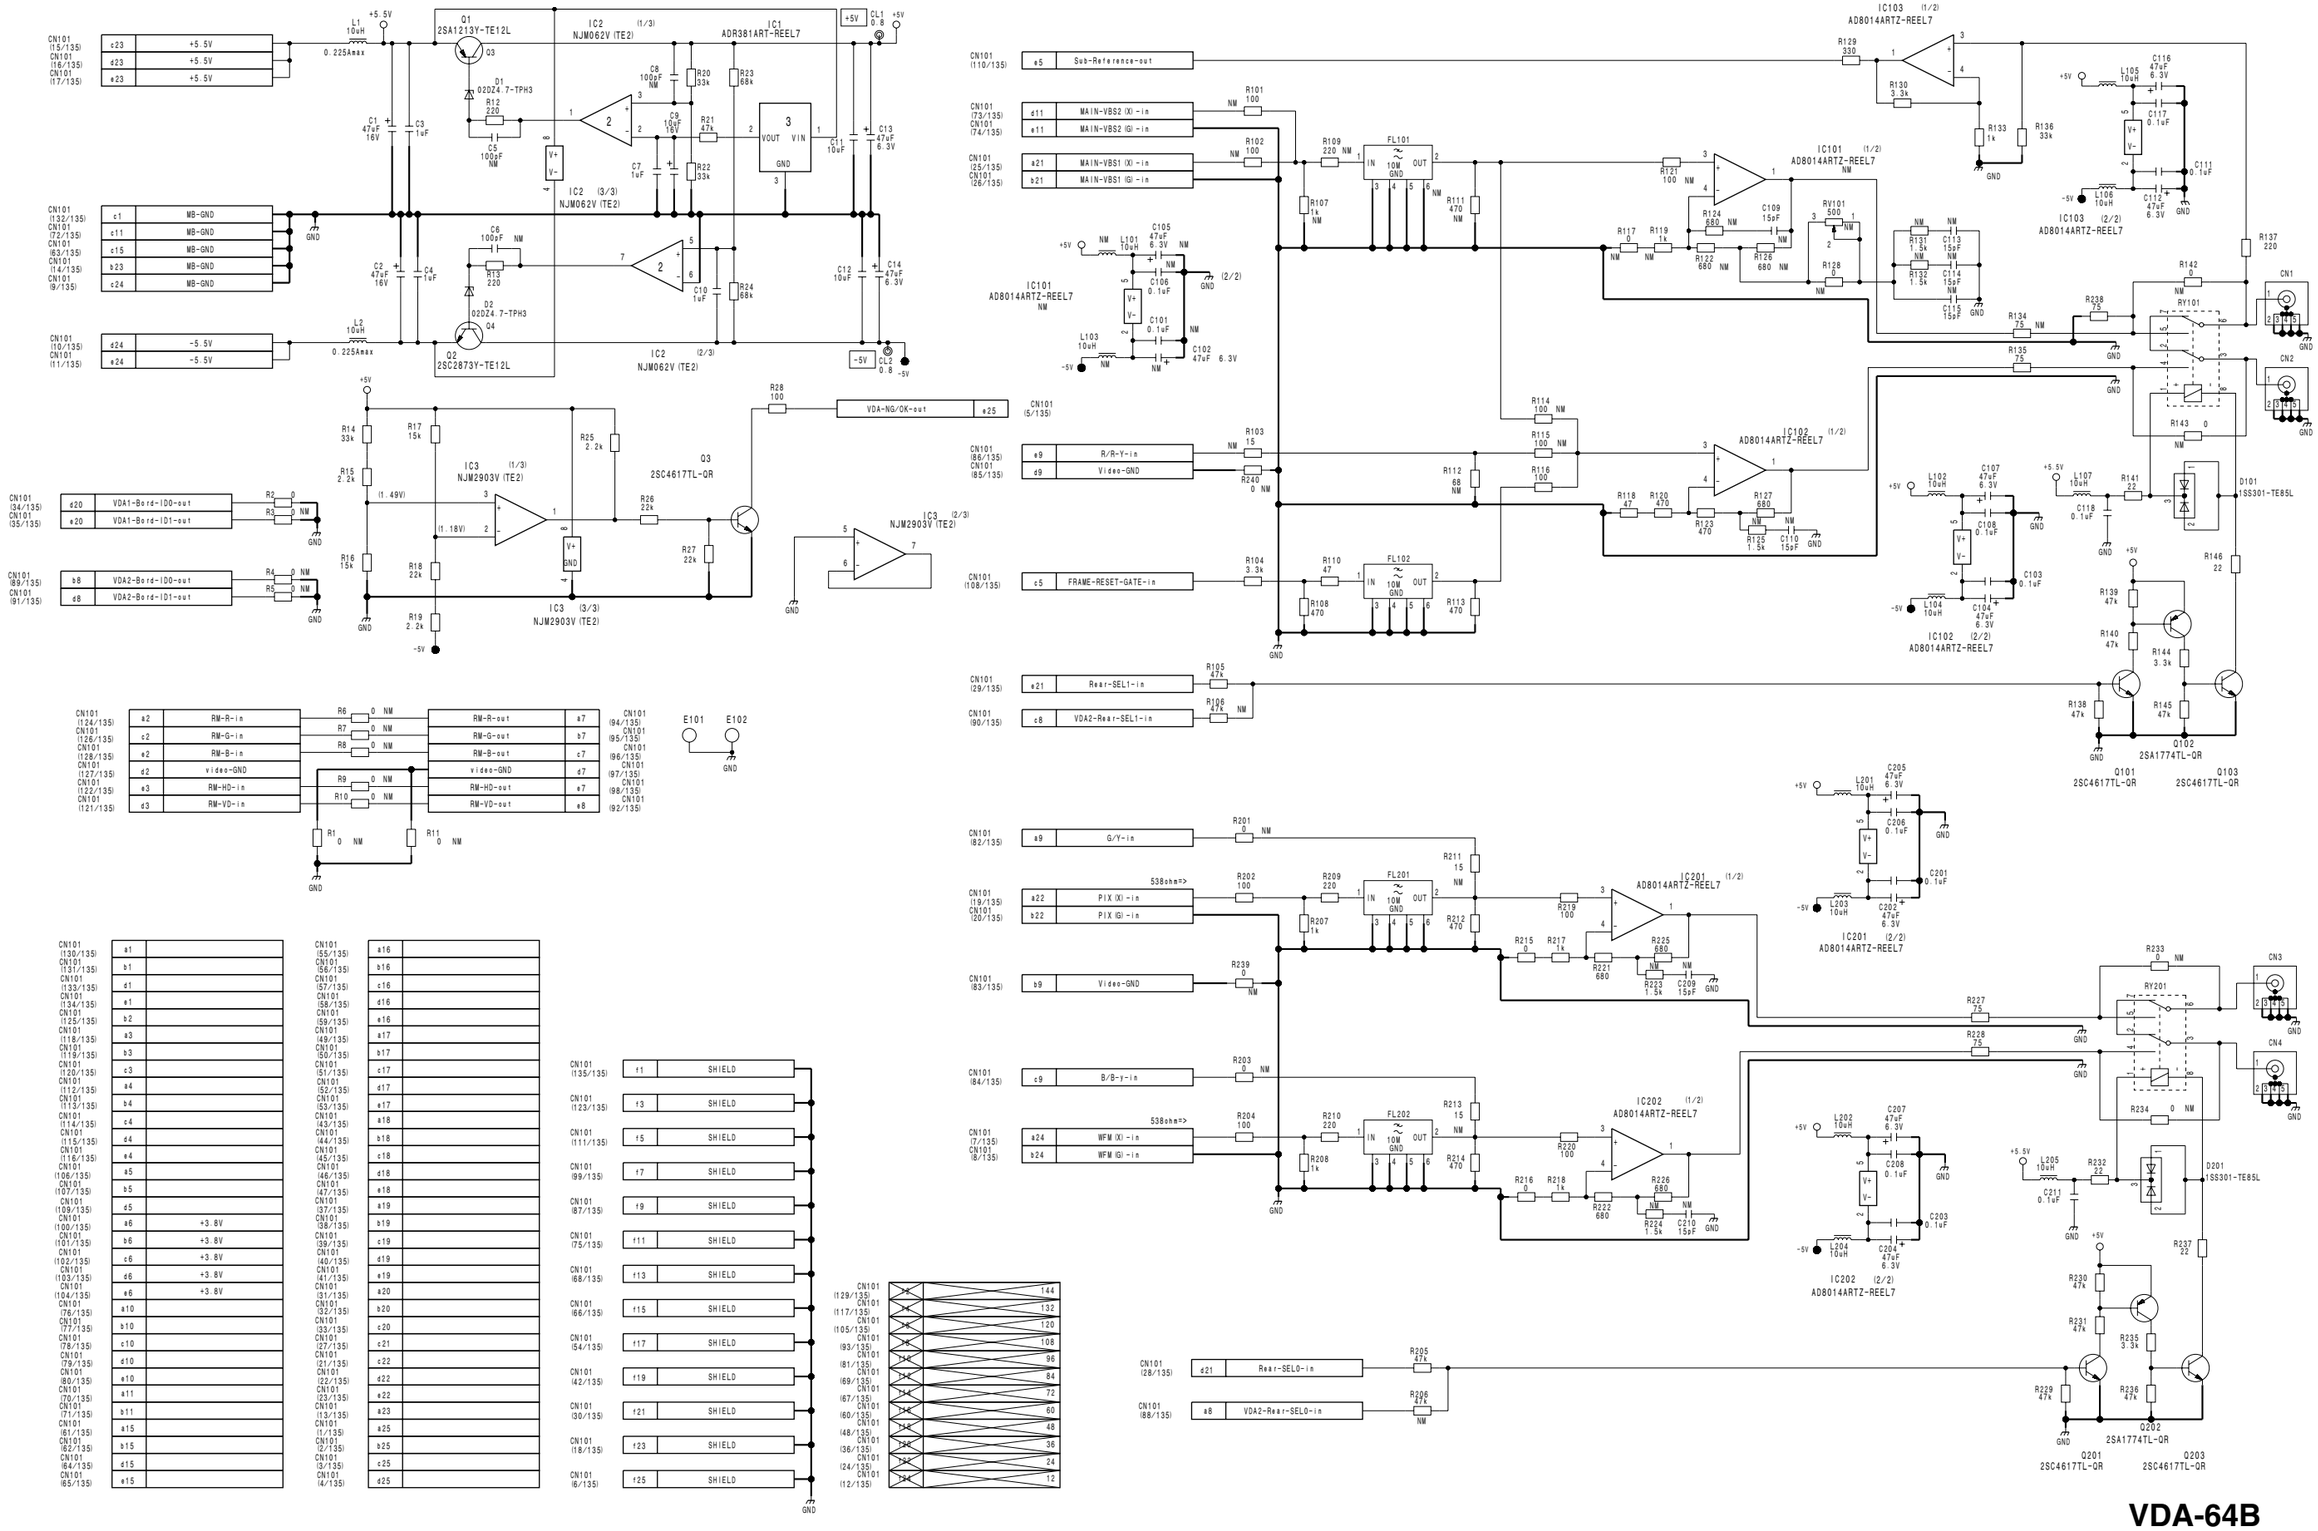

VDA-64B

BOARD NO. 1-868-003-11

HKCU1003_VDA-64B_011_1

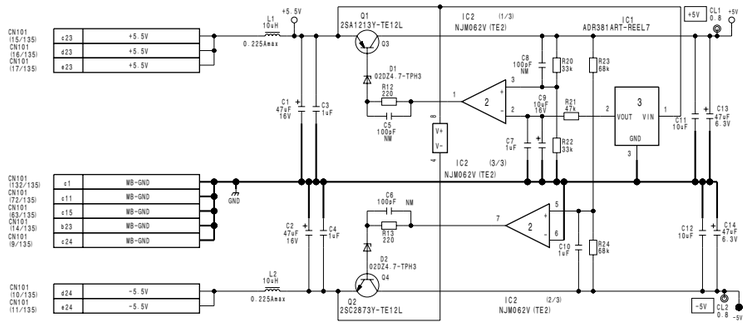

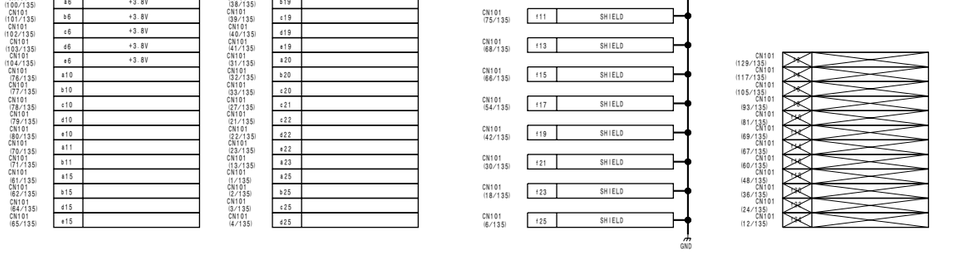

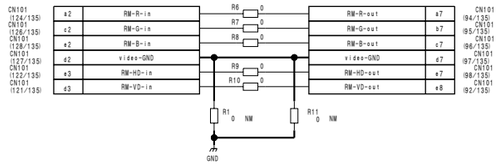

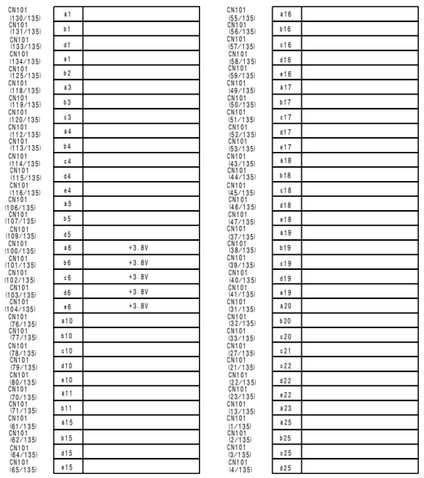

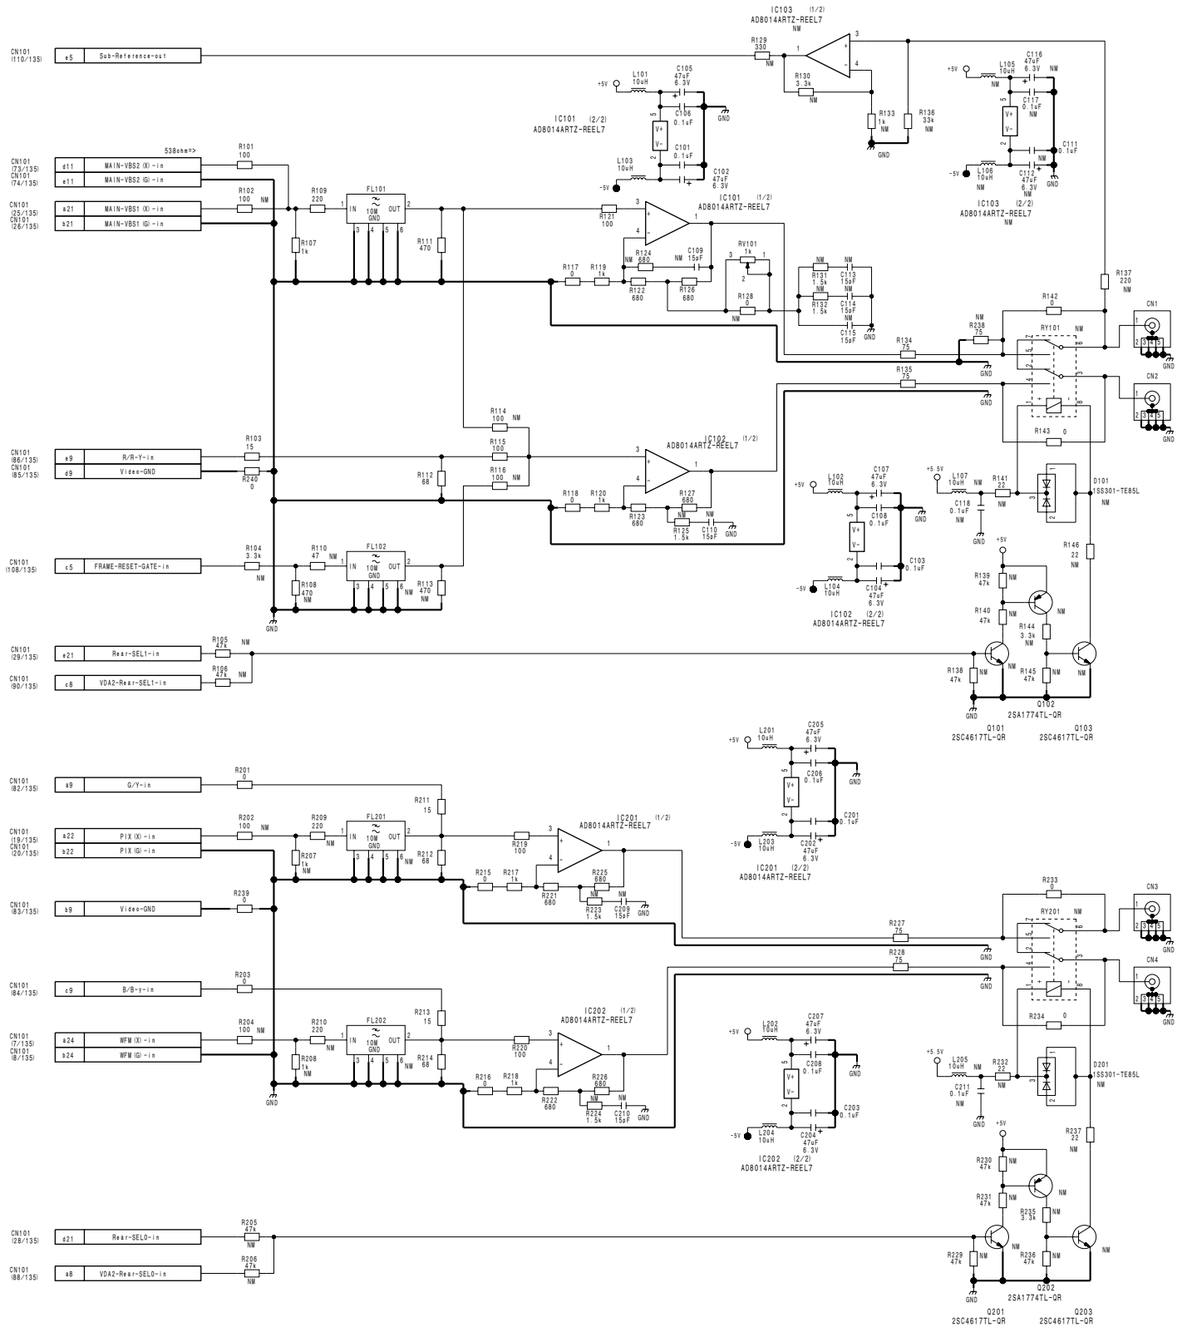

VDA-64C

BOARD NO. 1-868-003-11

HKCU1003_VDA-64C_011_1

VIF-34B (1/3)
SUFFIX: -11, -31

VIF-34B (1/3)
SUFFIX: -11, -31

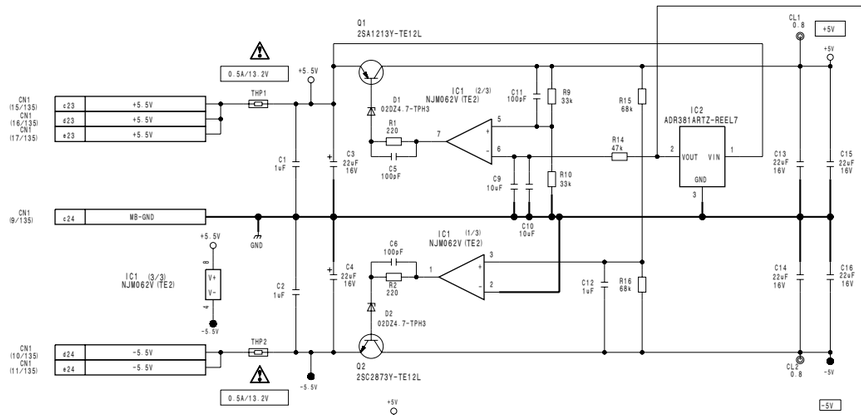

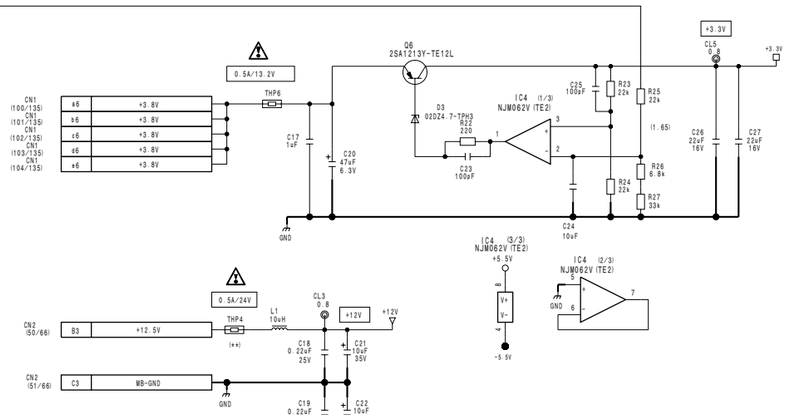

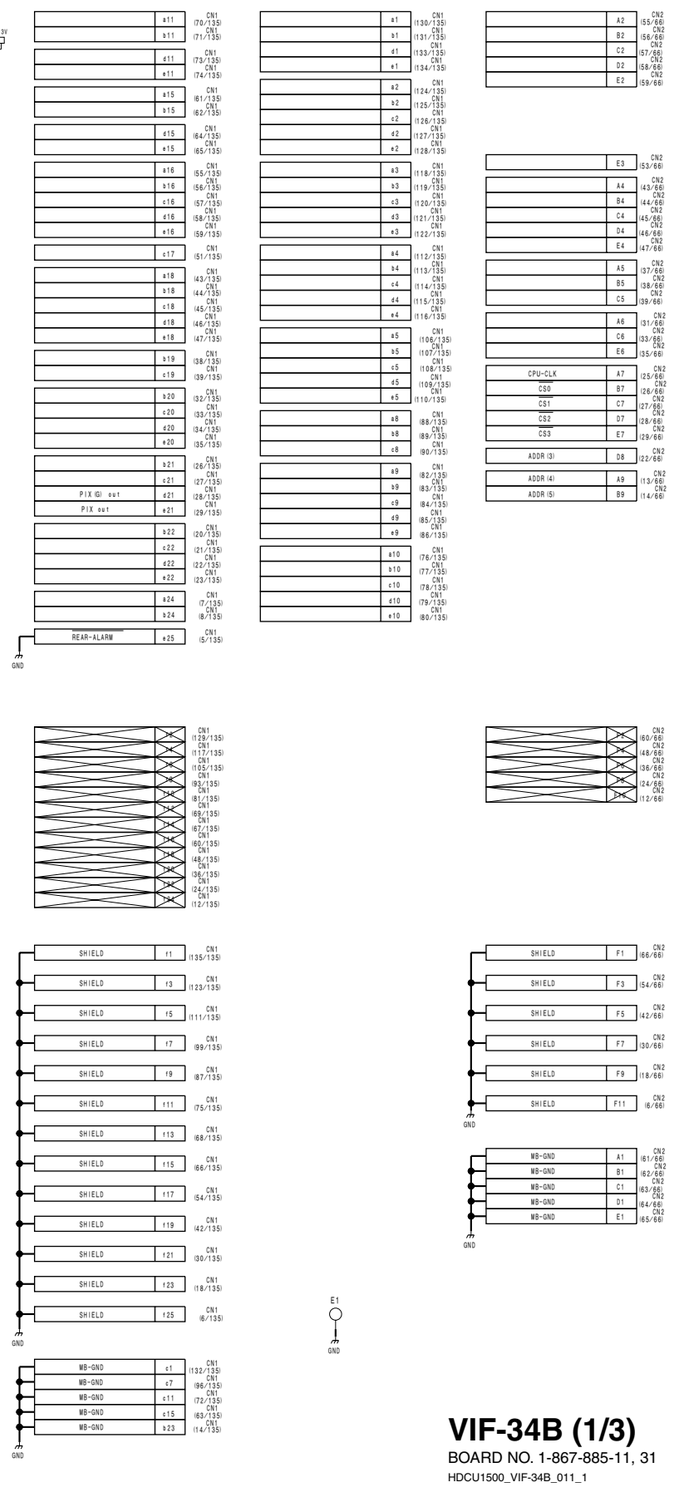

VIF-34B (1/3)
BOARD NO. 1-867-885-11, 31
HDCU1500_VIF-34B_011_1

VIF-34B (2/3)
SUFFIX: -11, -31

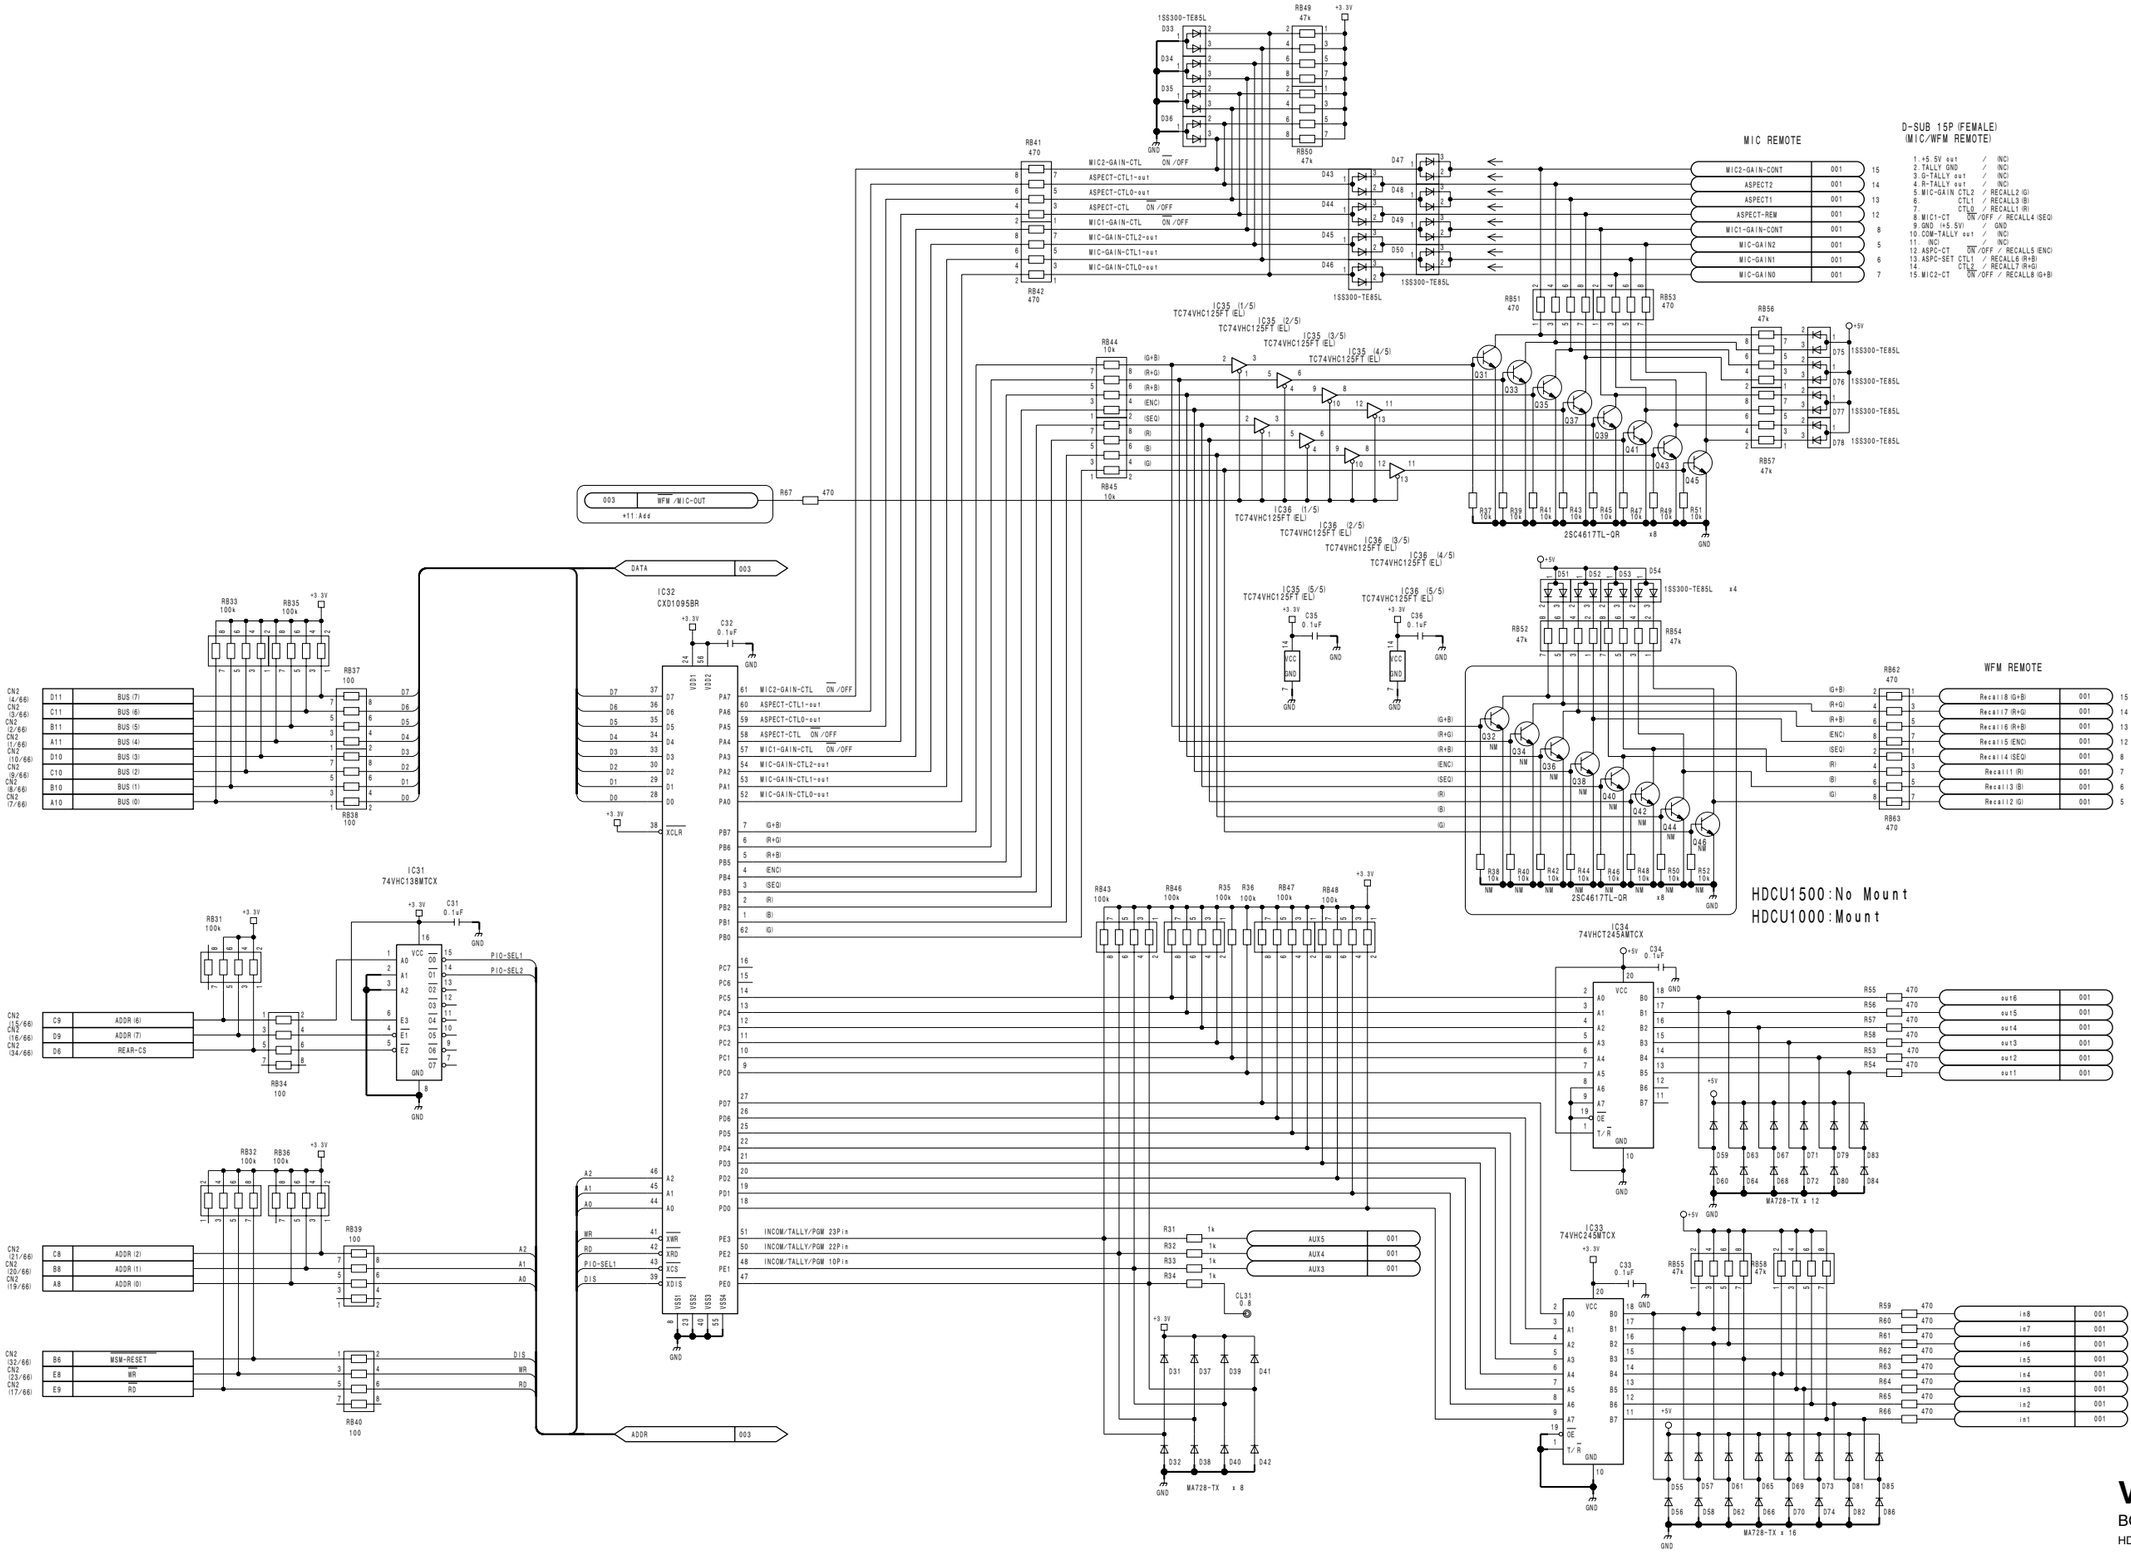

VIF-34B (2/3)

BOARD NO. 1-867-885-11, 31

HDCU1500_VIF-34B_011_2

7-114

VIF-34B (3/3)
SUFFIX: -11, -31

VIF-34B (3/3)
SUFFIX: -11, -31

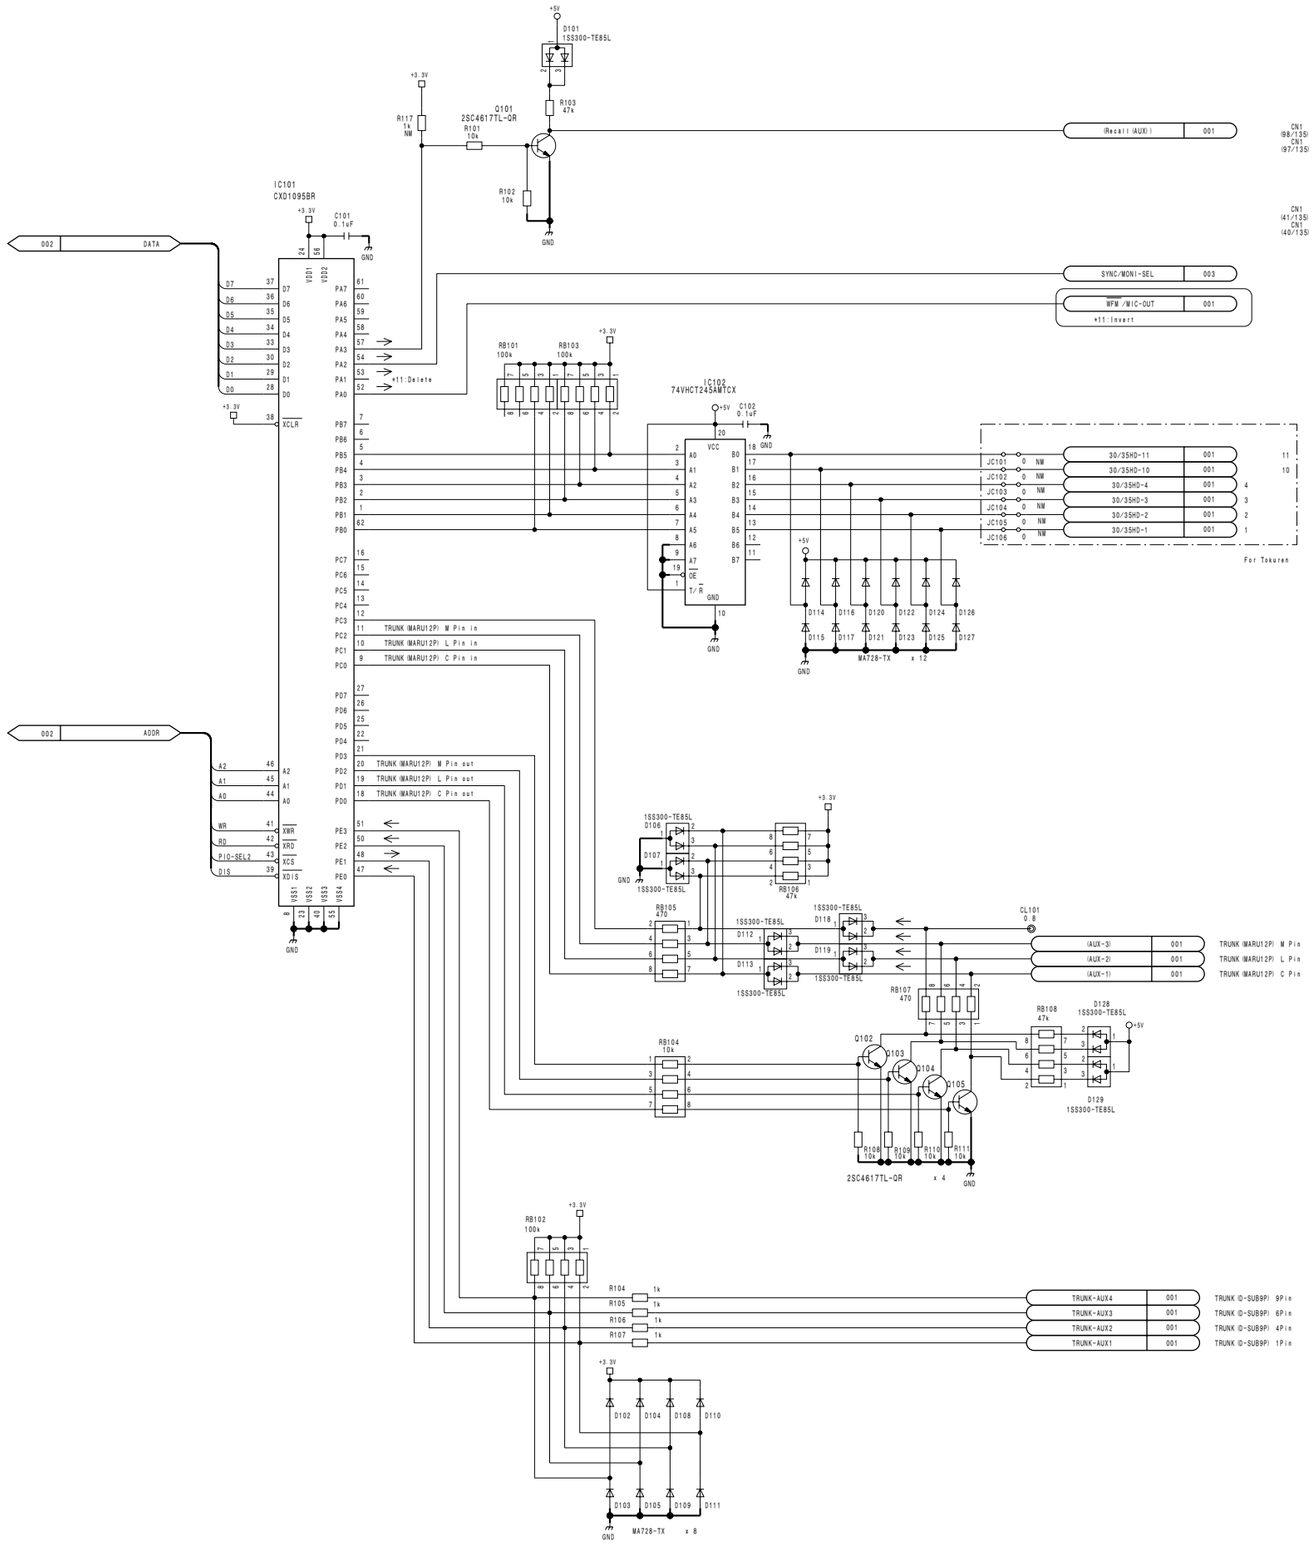

VIF-34B (3/3)
BOARD NO. 1-867-885-11, 31
HDCU1500_VIF-34B_011_3

VIF-34 (1/3)
SUFFIX: -11, -31

VIF-34 (1/3)
SUFFIX: -11, -31

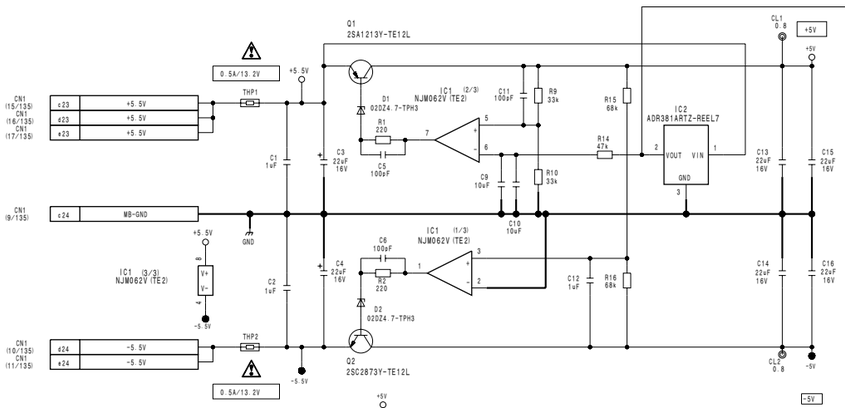

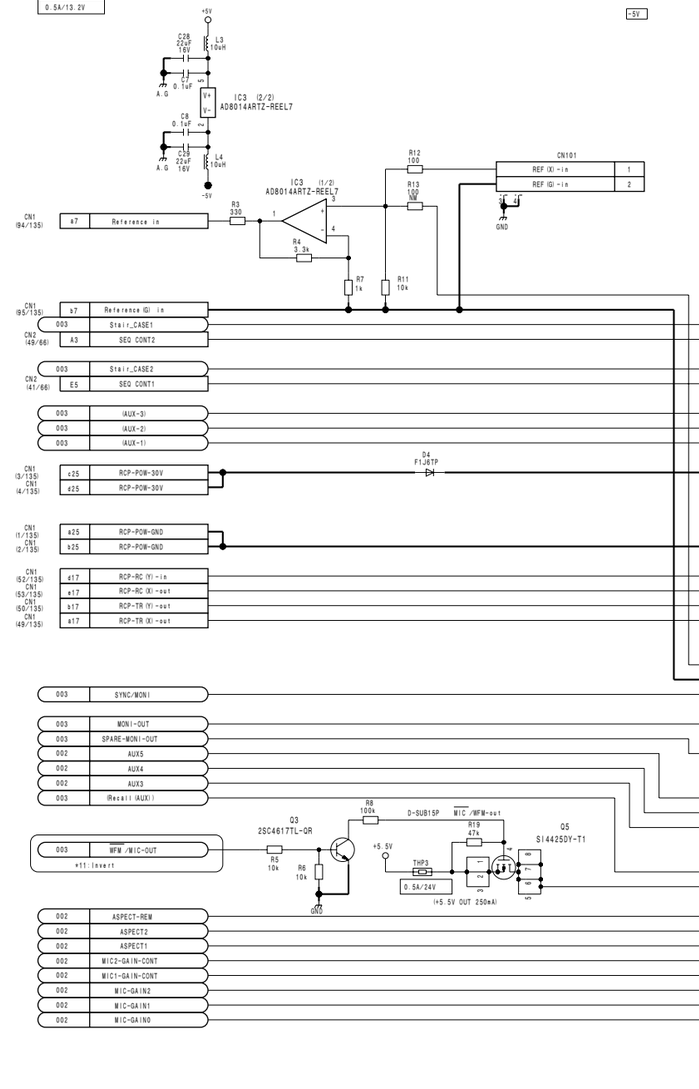

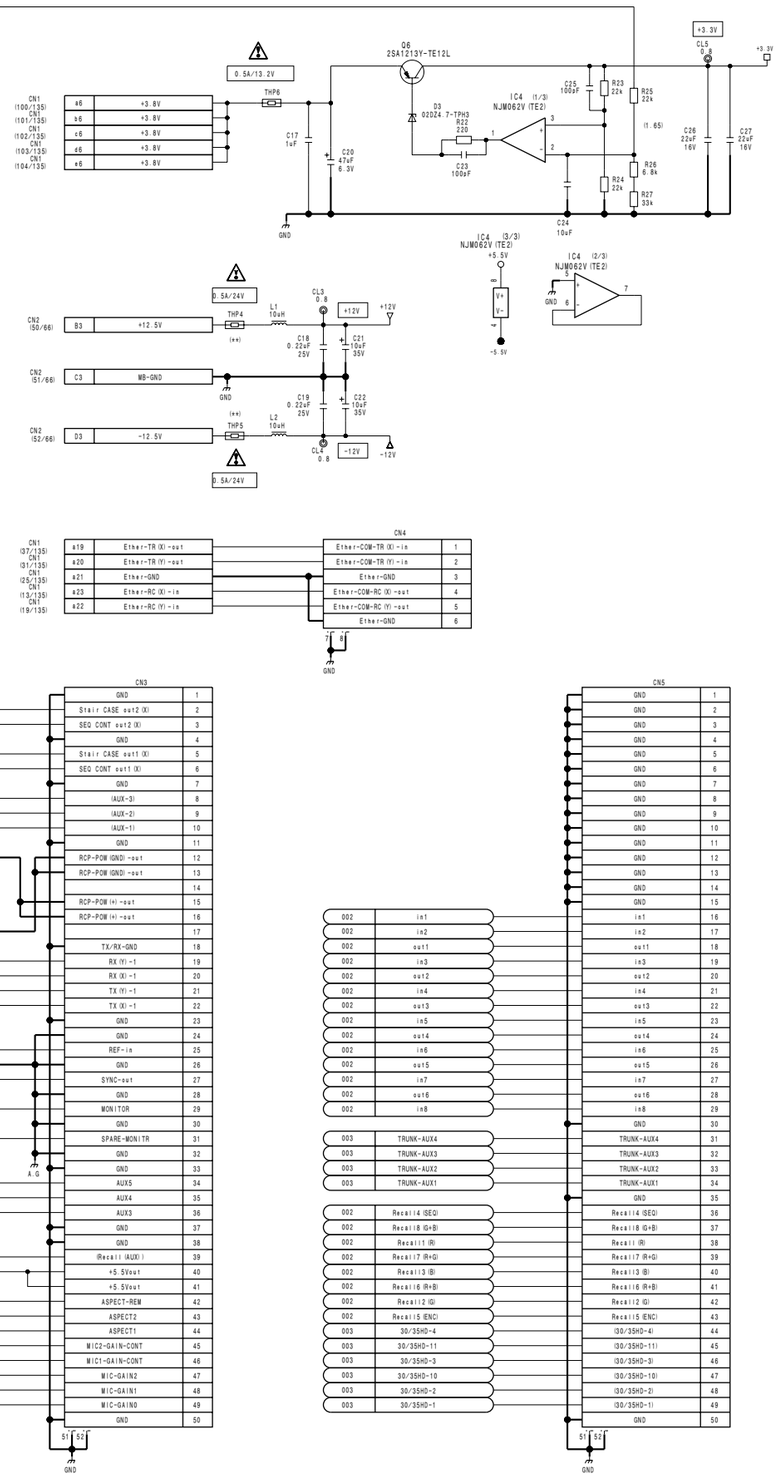

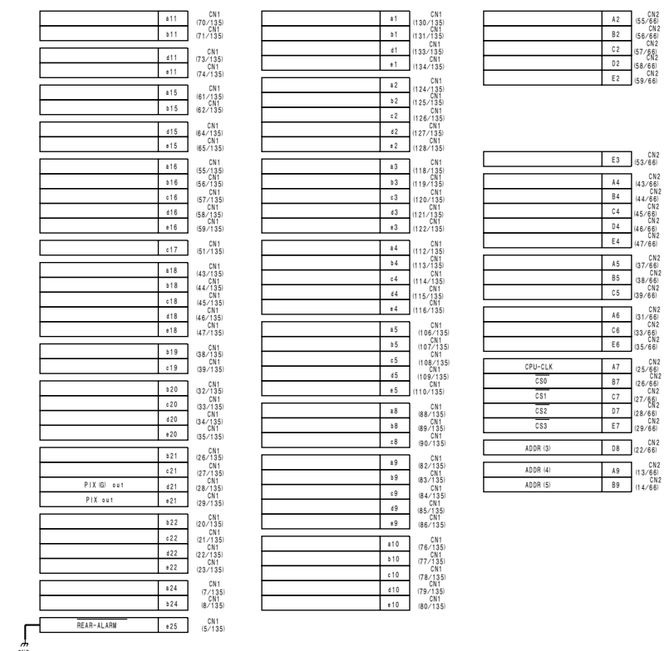

VIF-34 (1/3)
BOARD NO. 1-867-885-11, 31
HDCU1000_VIF-34_011_1

VIF-34 (2/3)
SUFFIX: -11, -31

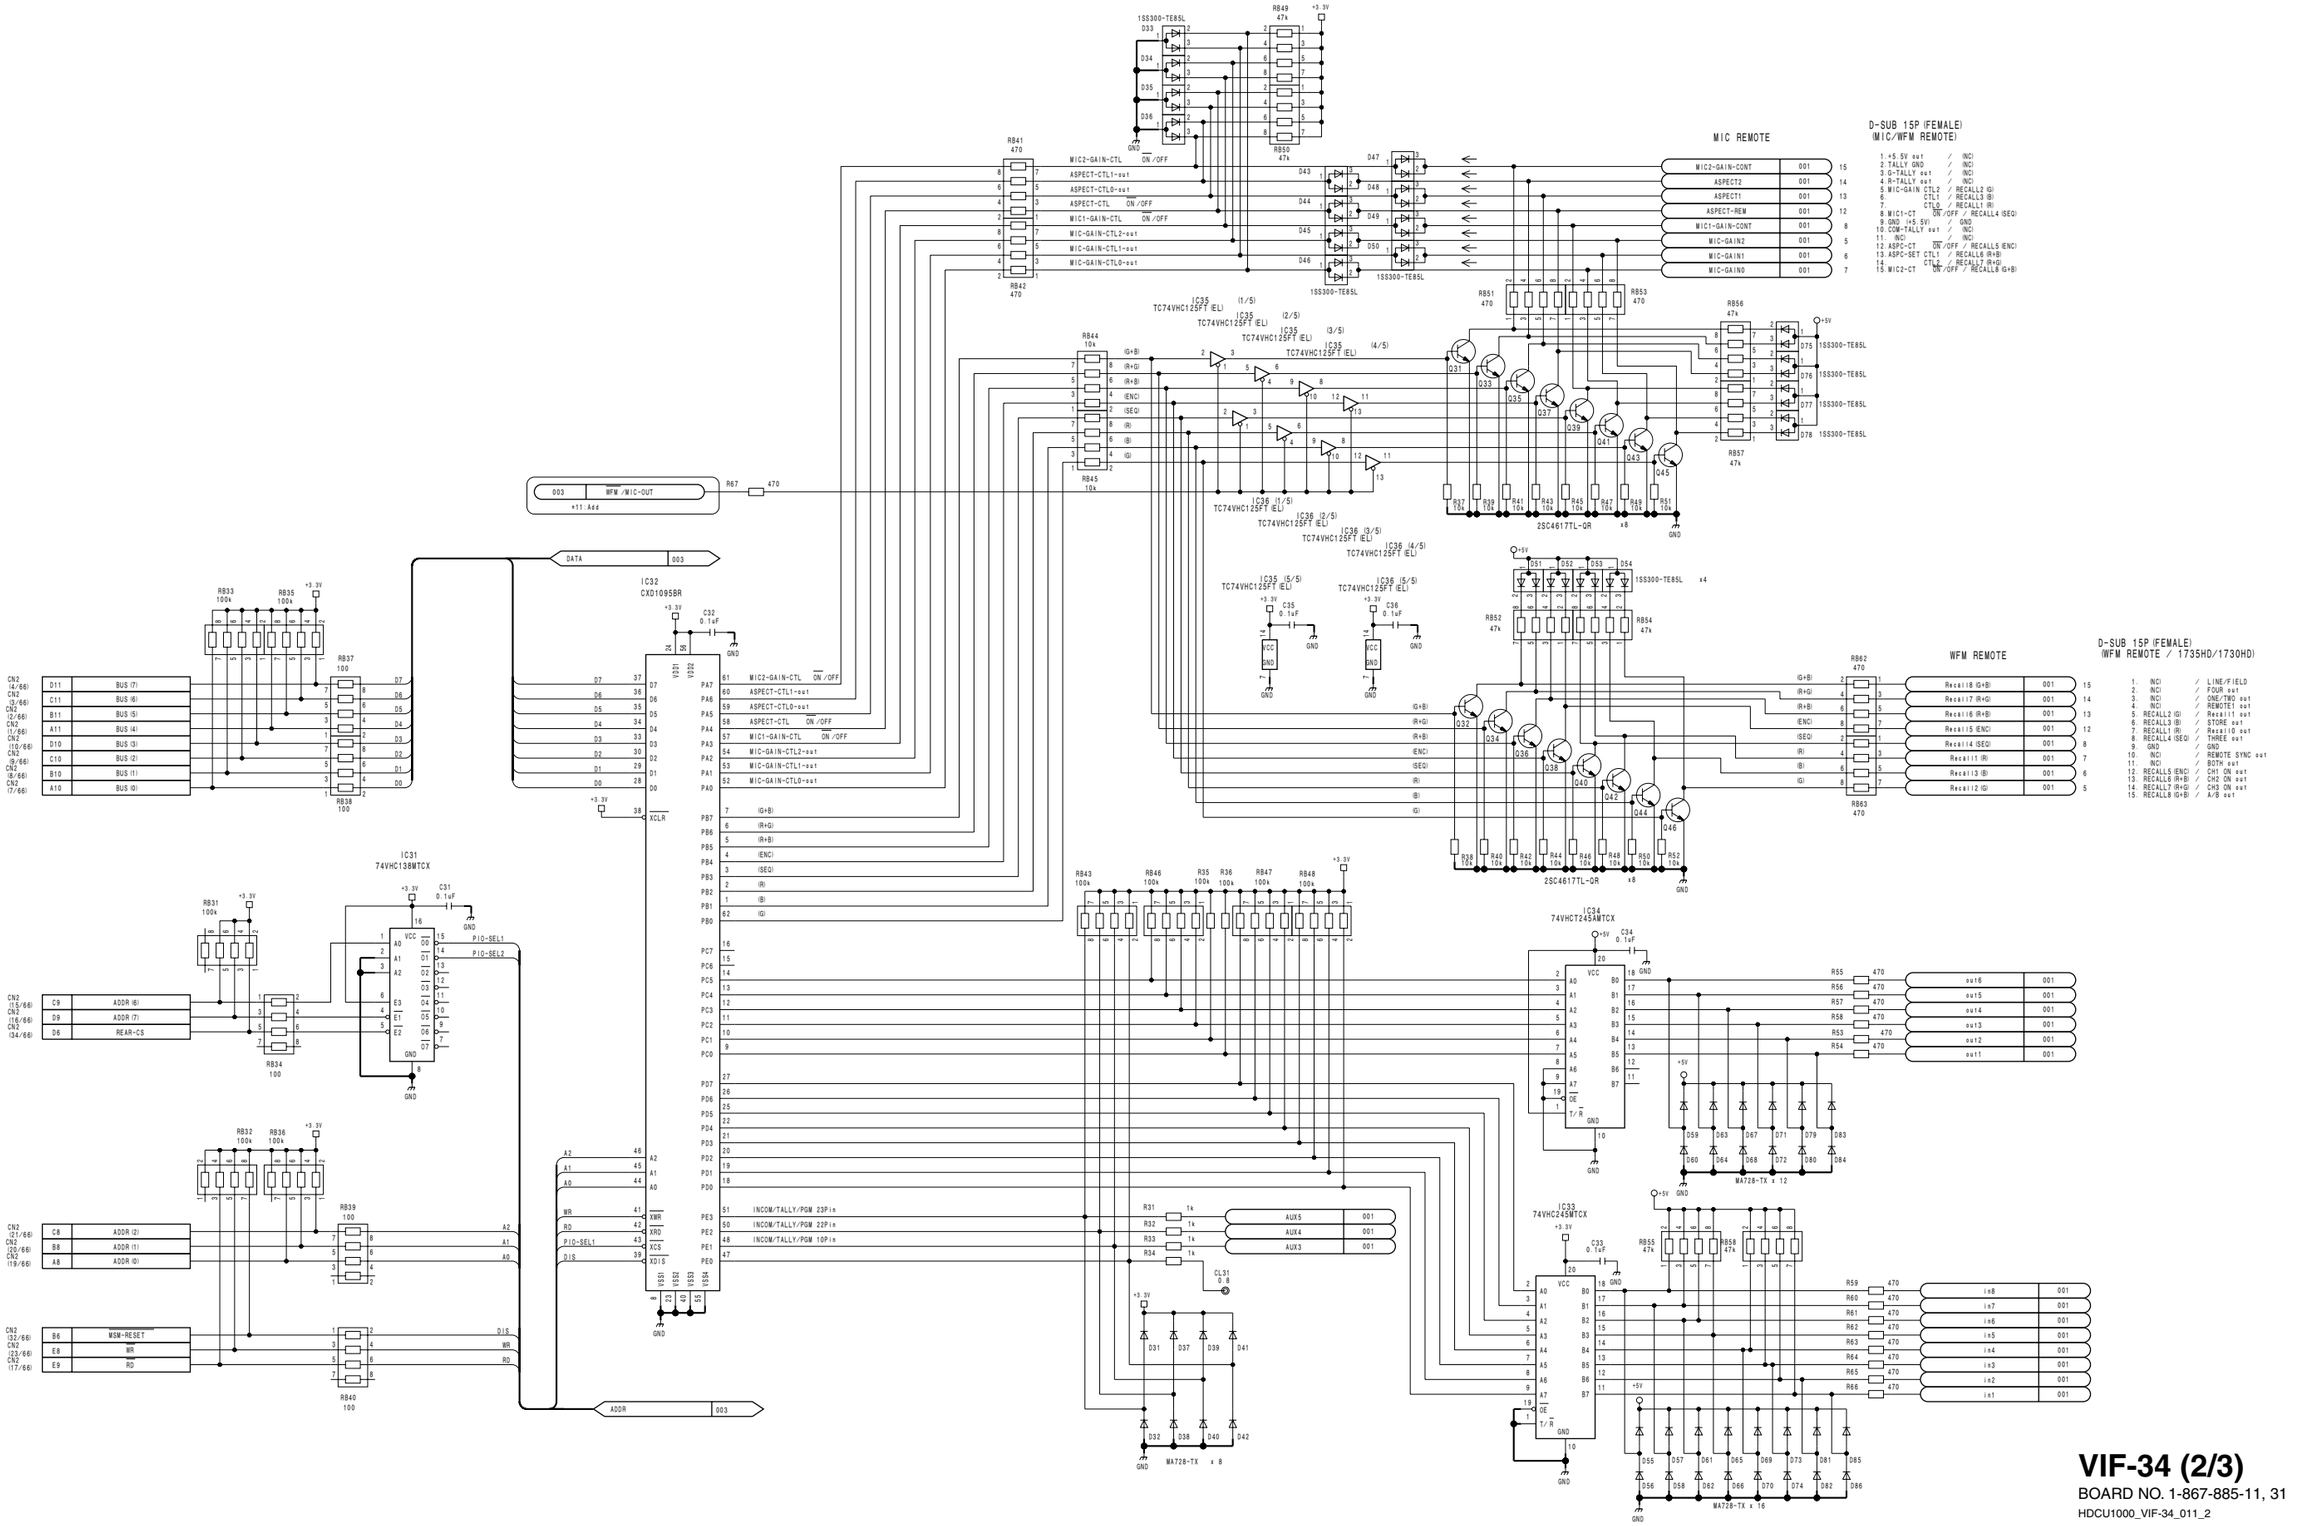

7-118

VIF-34 (2/3)
BOARD NO. 1-867-885-11, 31
HDCU1000_VIF-34_011_2

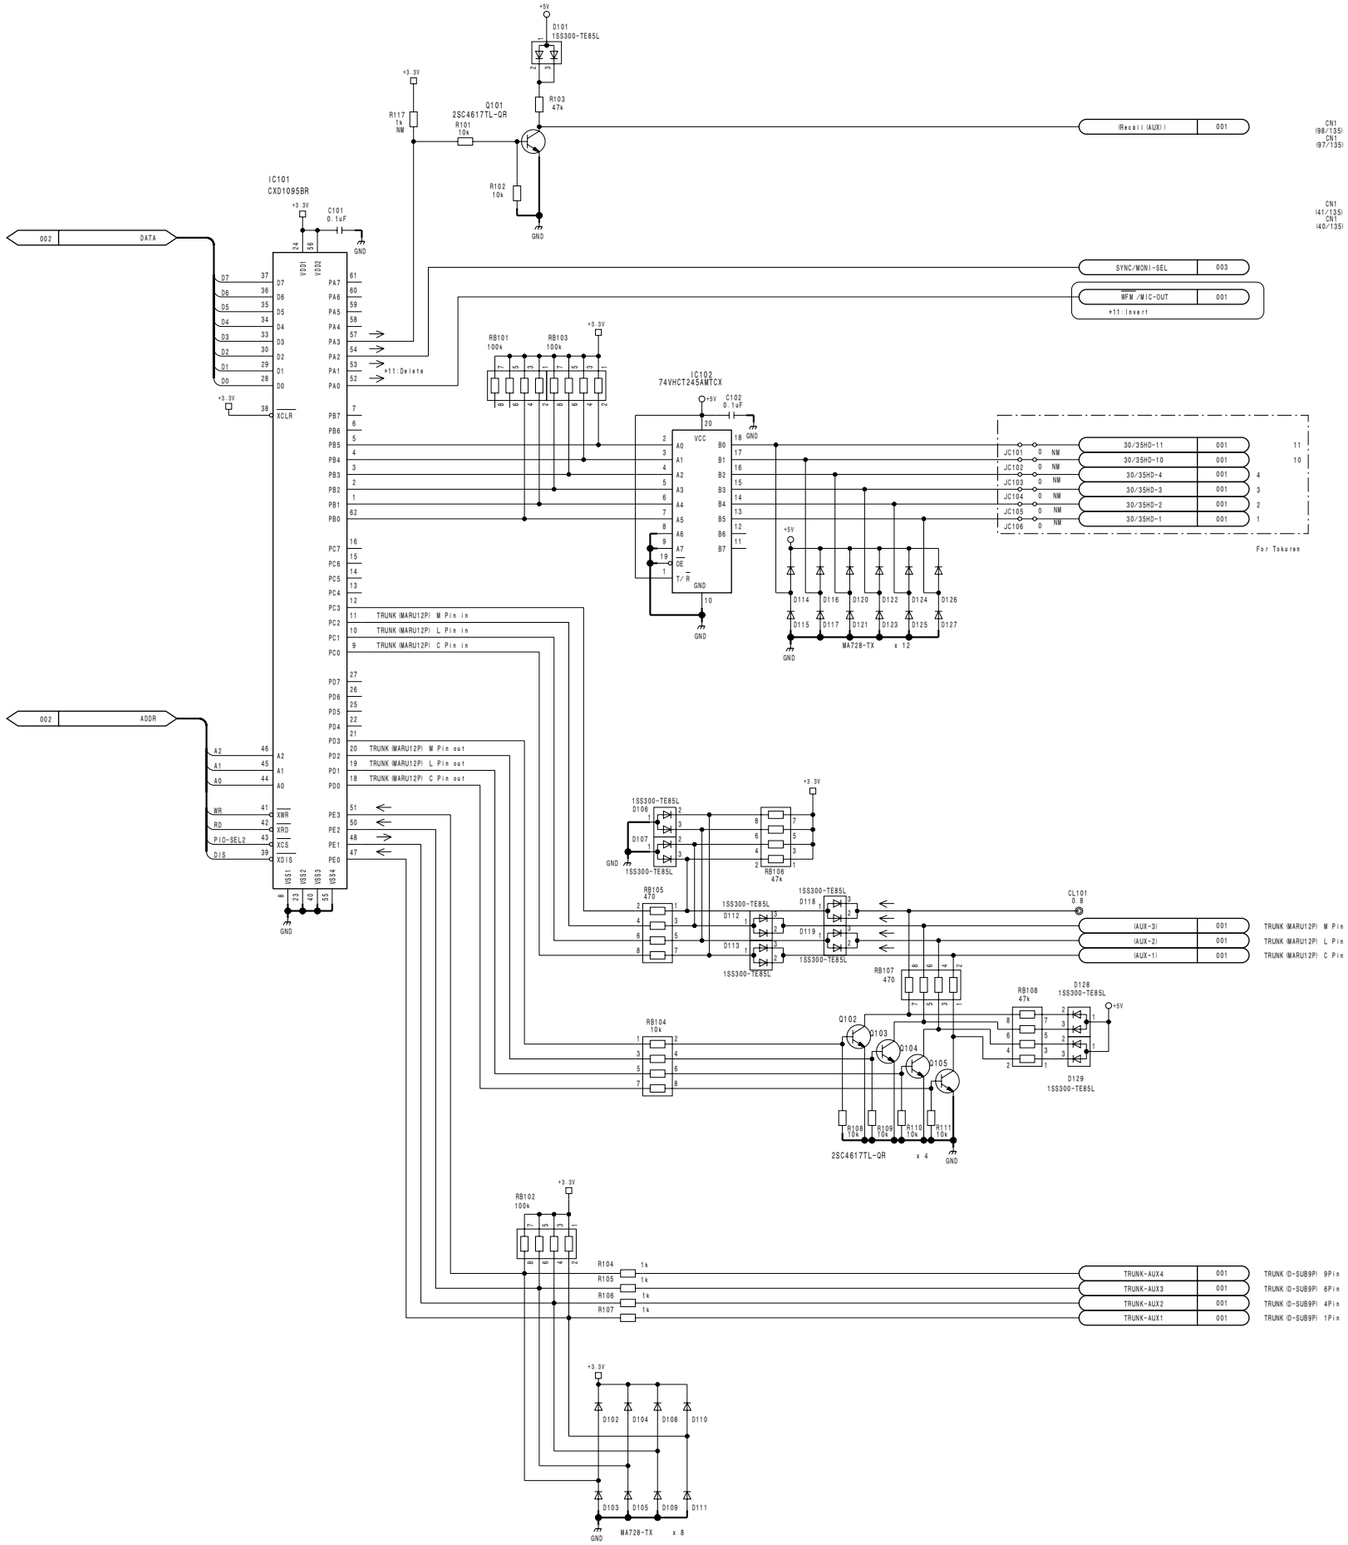

VIF-34 (3/3)
BOARD NO. 1-867-885-11, 31
HDCU1000_VIF-34_011_3

Frame Wiring (HDCU1000)

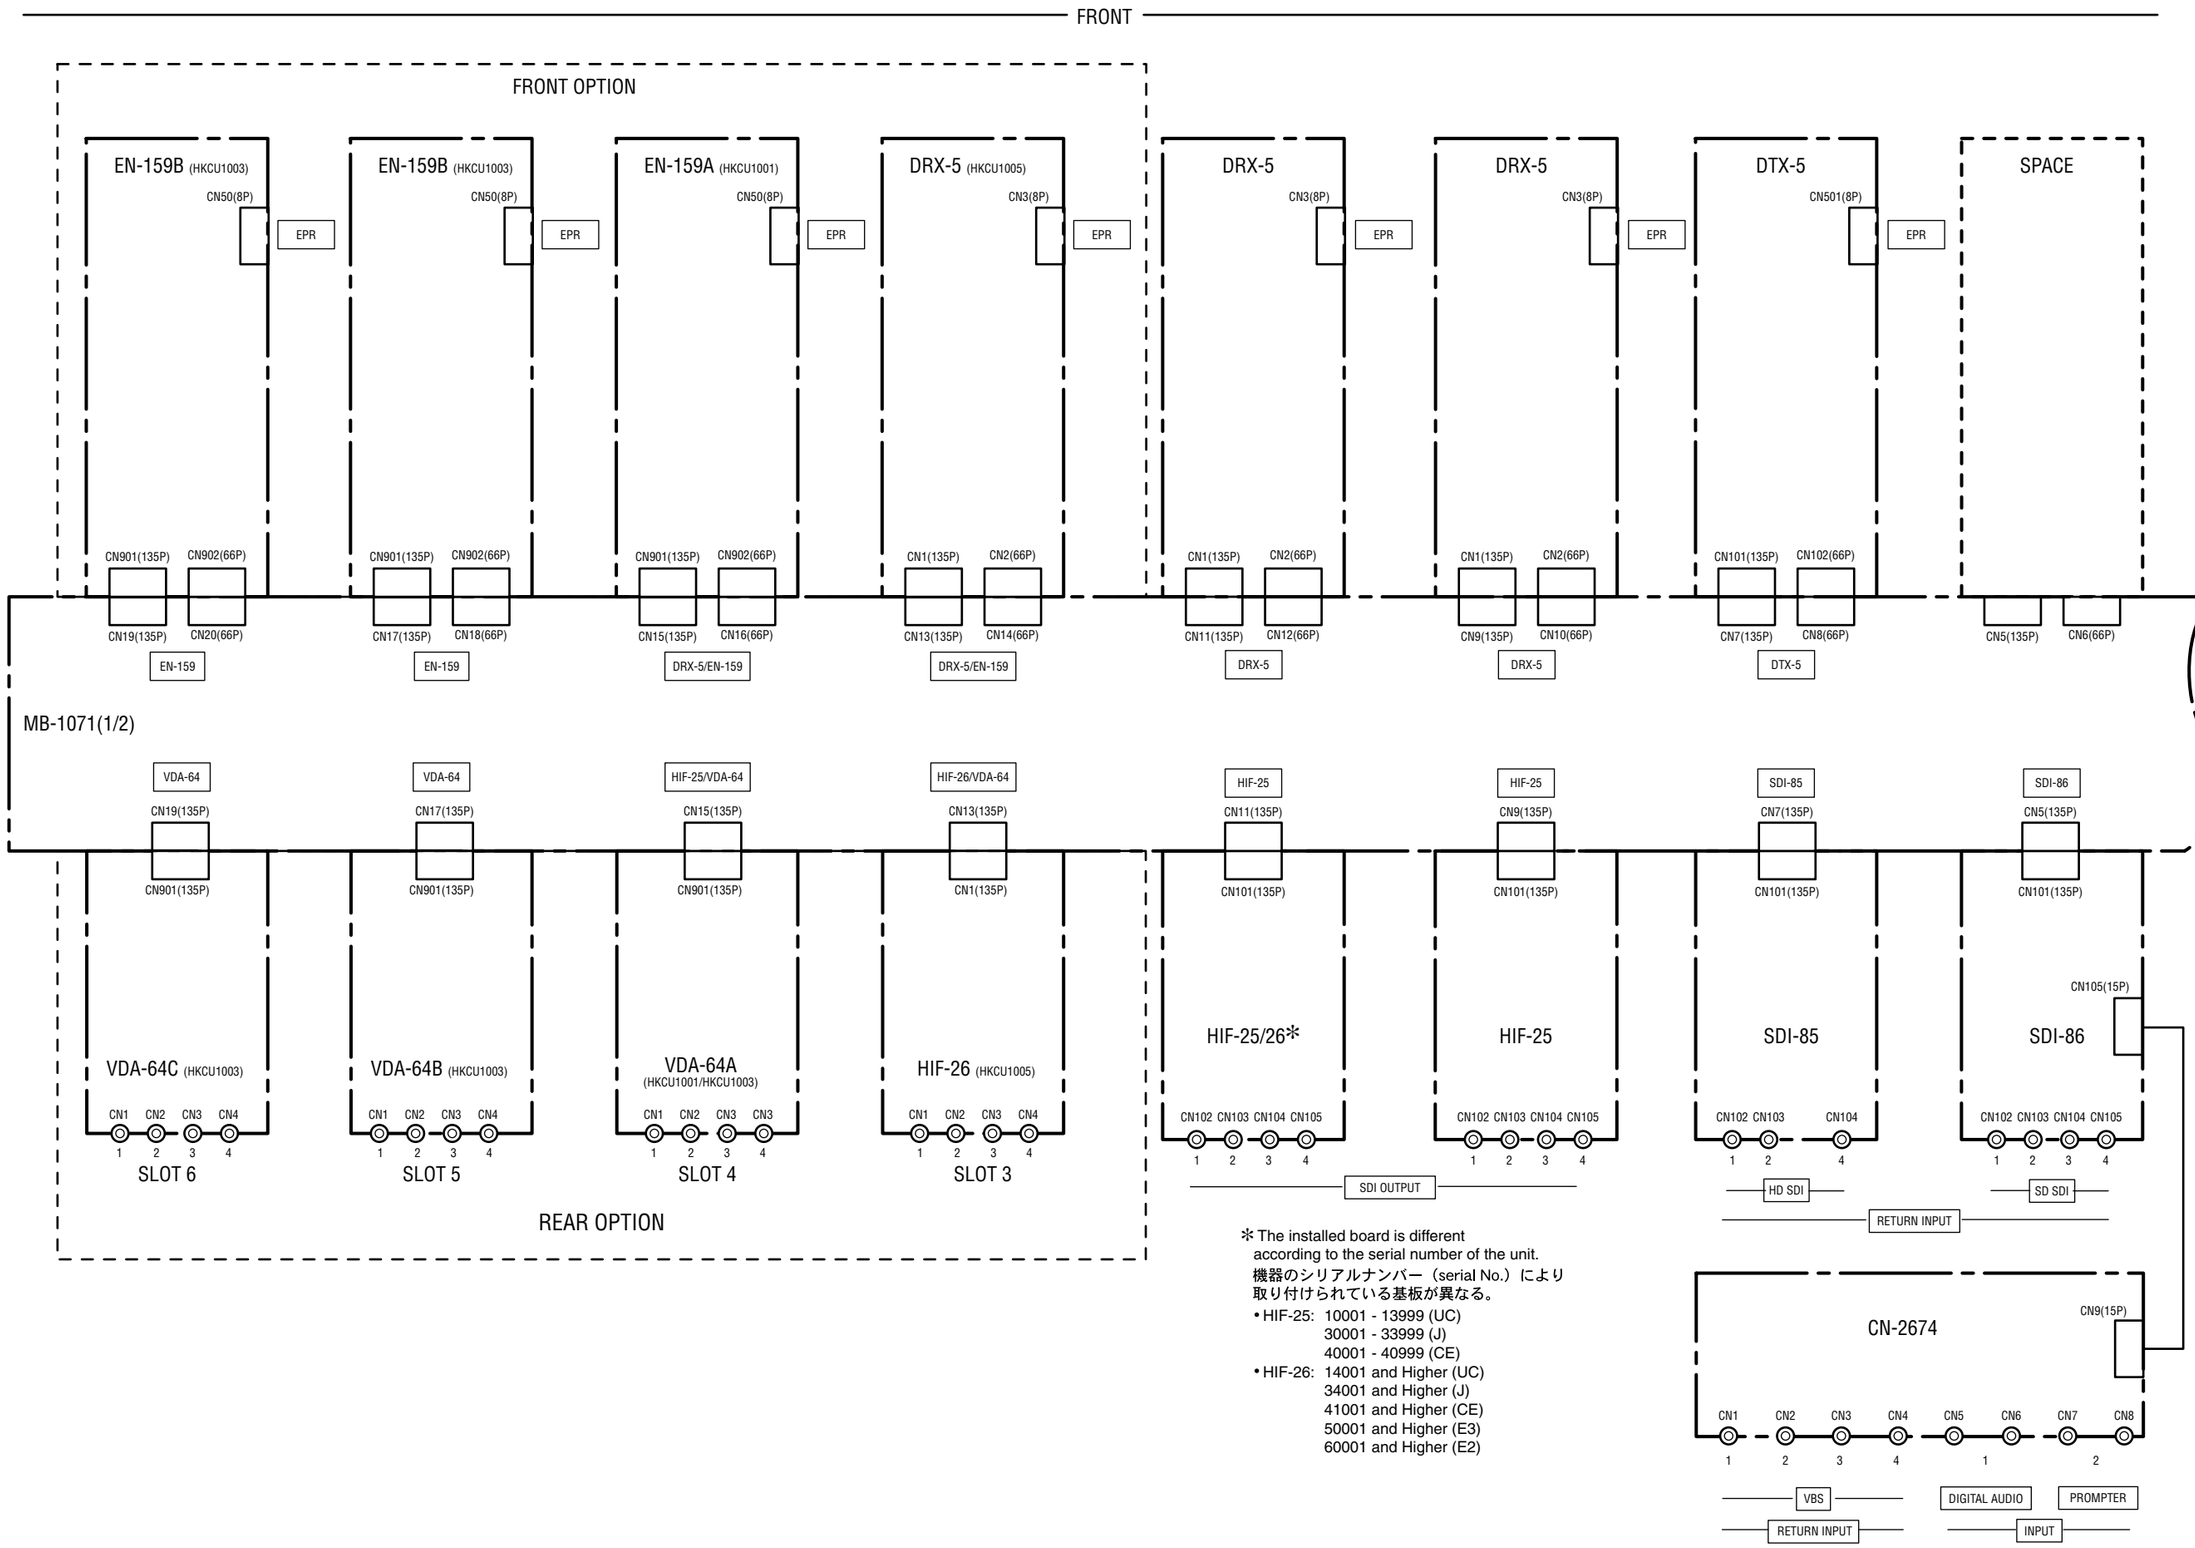

* The installed board is different according to the serial number of the unit.
機器のシリアルナンバー（serial No.）により取り付けられている基板が異なる。
- HIF-25: 10001 - 13999 (UC)
  30001 - 33999 (J)
  40001 - 40999 (CE)
- HIF-26: 14001 and Higher (UC)
  34001 and Higher (J)
  41001 and Higher (CE)
  50001 and Higher (E3)
  60001 and Higher (E2)

7-120

Frame Wiring (HDCU1000)

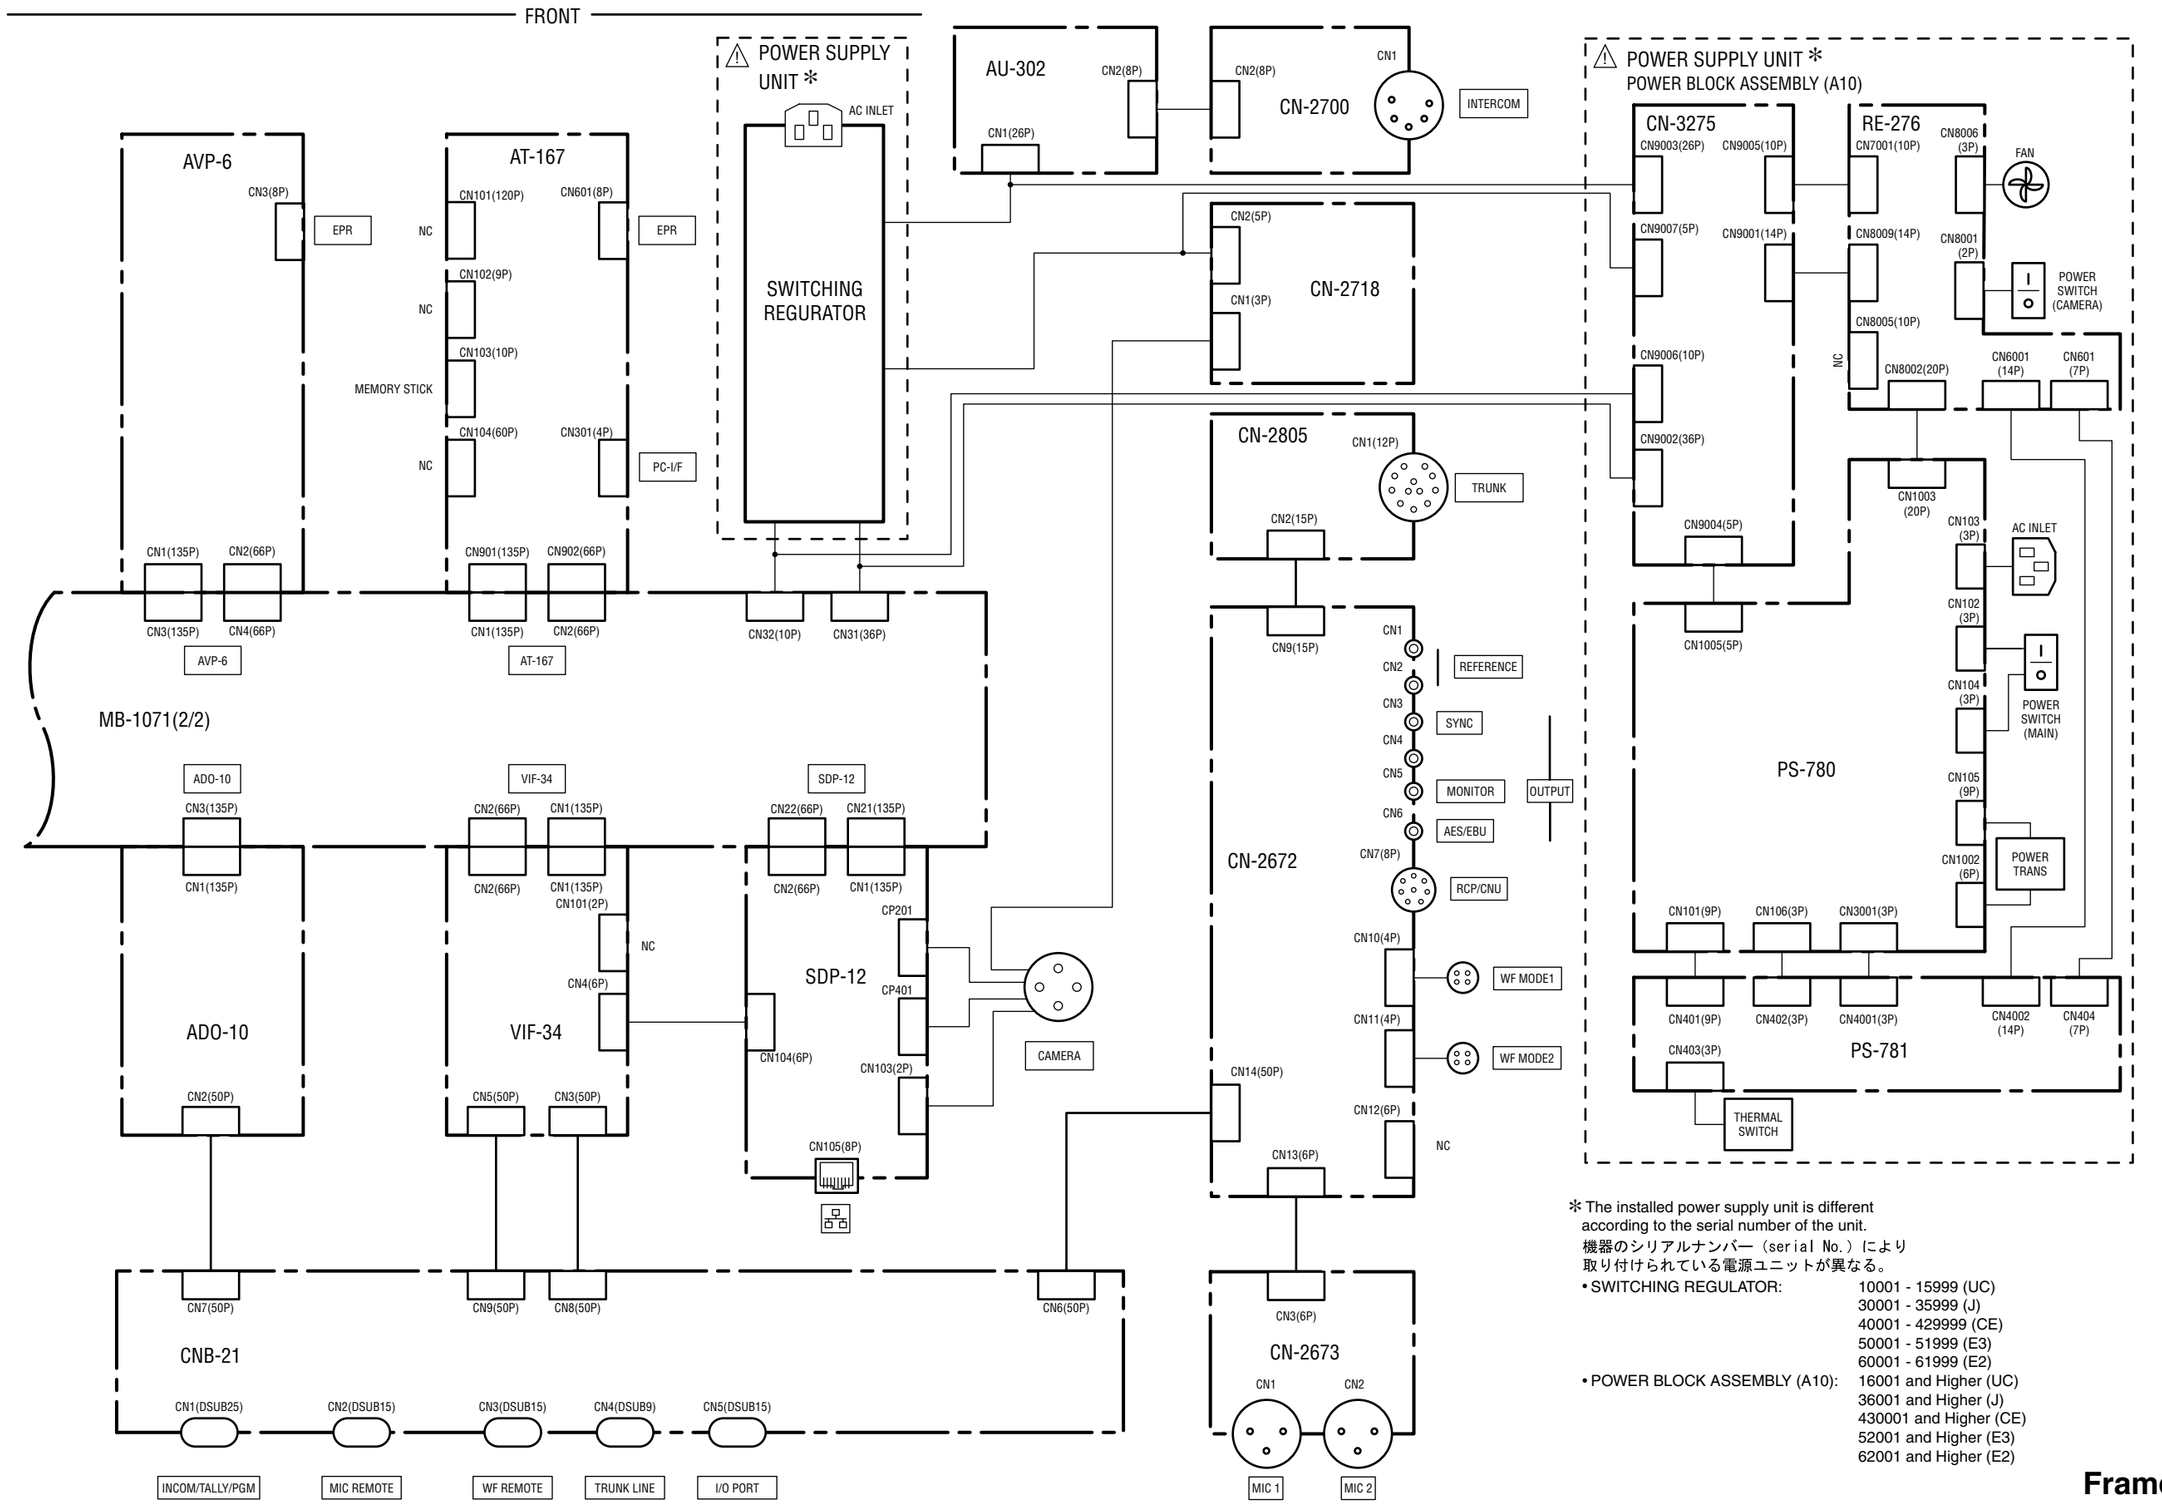

✻ The installed power supply unit is different according to the serial number of the unit.
機器のシリアルナンバー（serial No.）により取り付けられている電源ユニットが異なる。

- SWITCHING REGULATOR: 10001 - 15999 (UC)
  30001 - 35999 (J)
  40001 - 429999 (CE)
  50001 - 51999 (E3)
  60001 - 61999 (E2)
- POWER BLOCK ASSEMBLY (A10): 16001 and Higher (UC)
  36001 and Higher (J)
  430001 and Higher (CE)
  52001 and Higher (E3)
  62001 and Higher (E2)

Frame Wiring (HDCU1000)

Frame Wiring (HDCU1080)

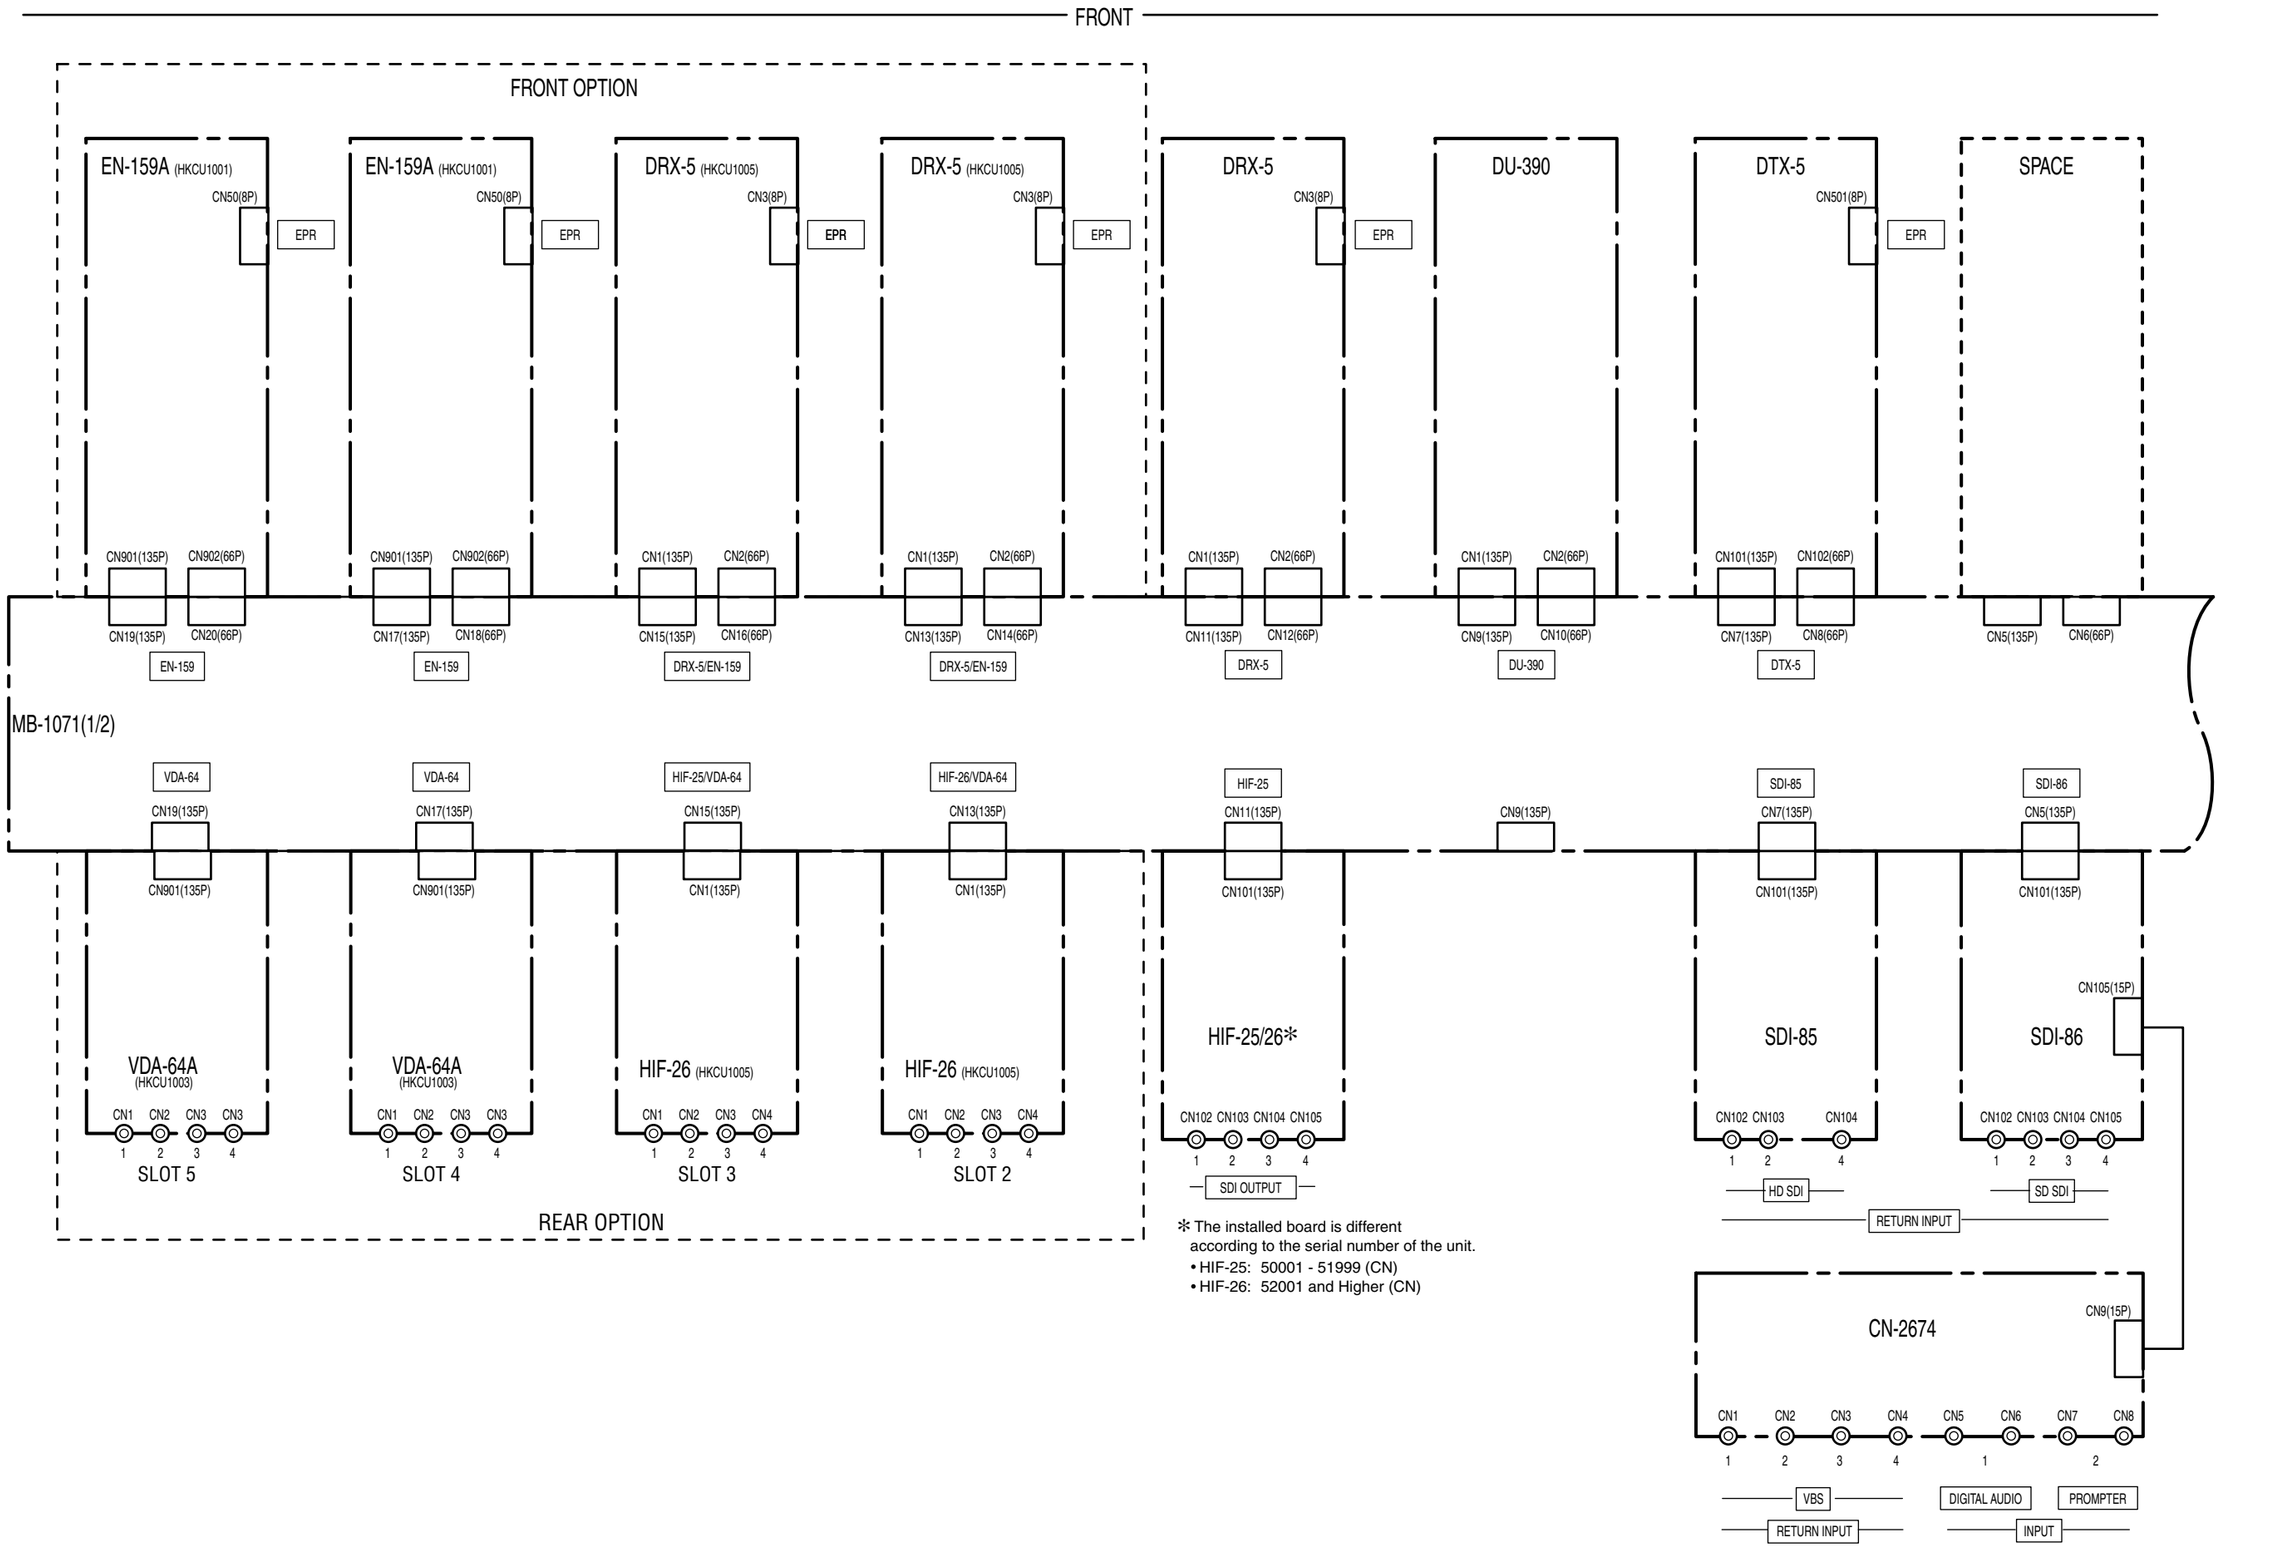

* The installed board is different according to the serial number of the unit.
- HIF-25: 50001 - 51999 (CN)
- HIF-26: 52001 and Higher (CN)

7-122

Frame Wiring (HDCU1080)

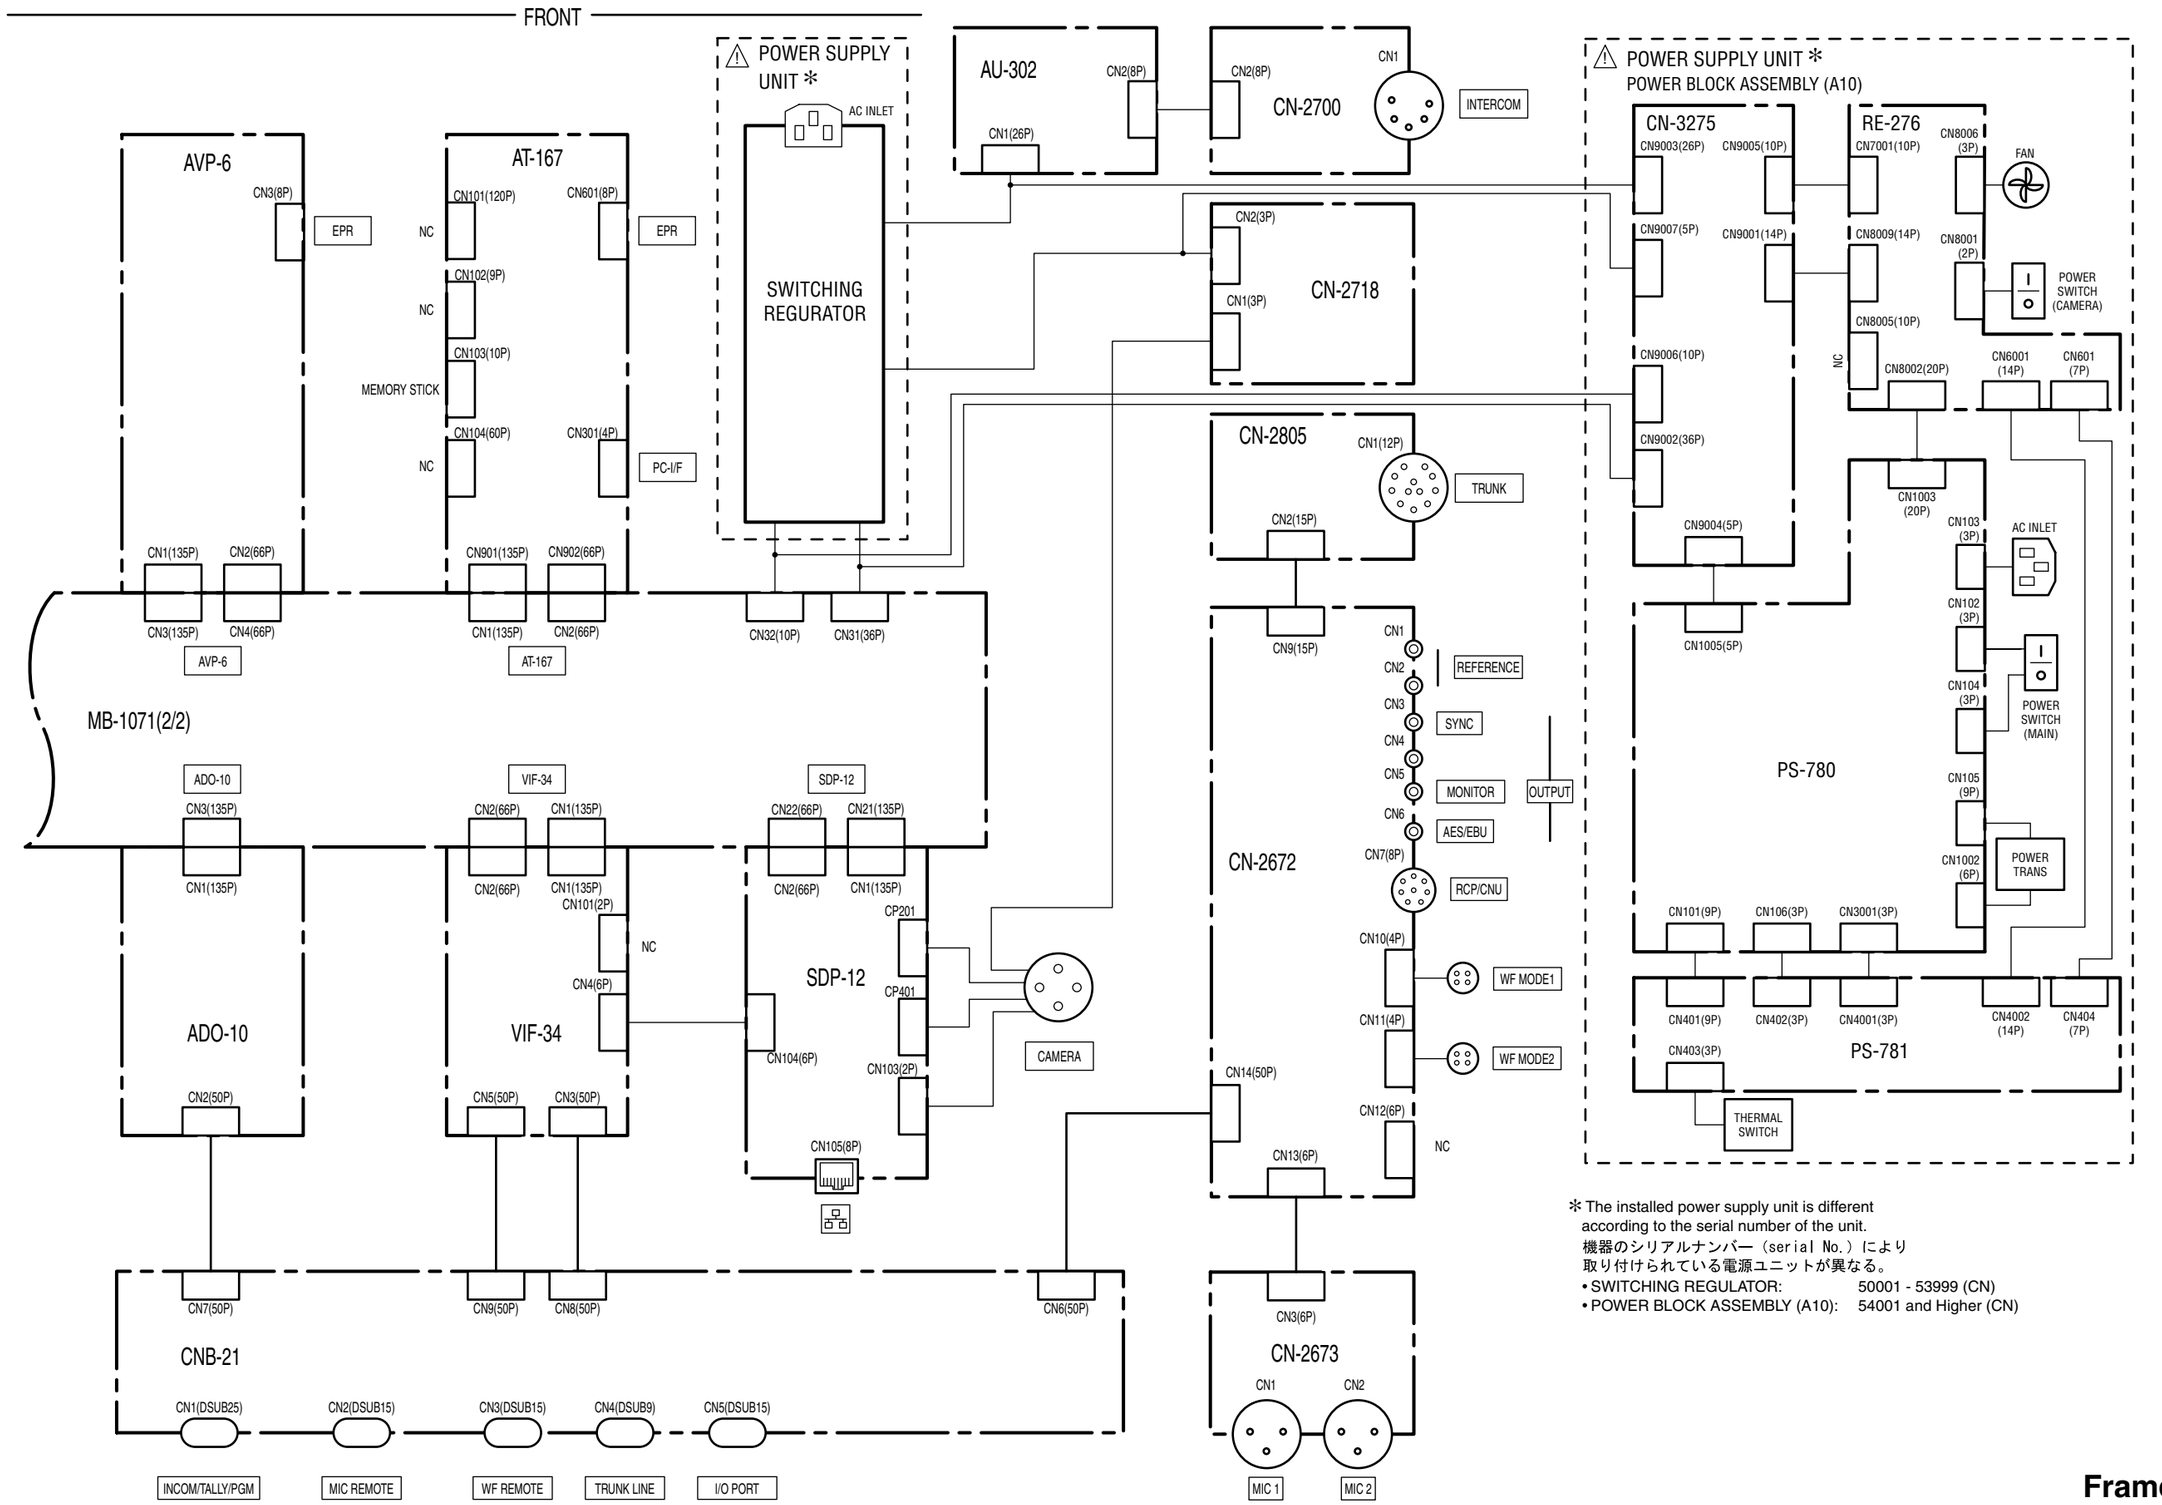

✻ The installed power supply unit is different according to the serial number of the unit.
機器のシリアルナンバー（serial No.）により取り付けられている電源ユニットが異なる。
- SWITCHING REGULATOR: 50001 - 53999 (CN)
- POWER BLOCK ASSEMBLY (A10): 54001 and Higher (CN)

Frame Wiring (HDCU1080)

Frame Wiring (HDCU1500)

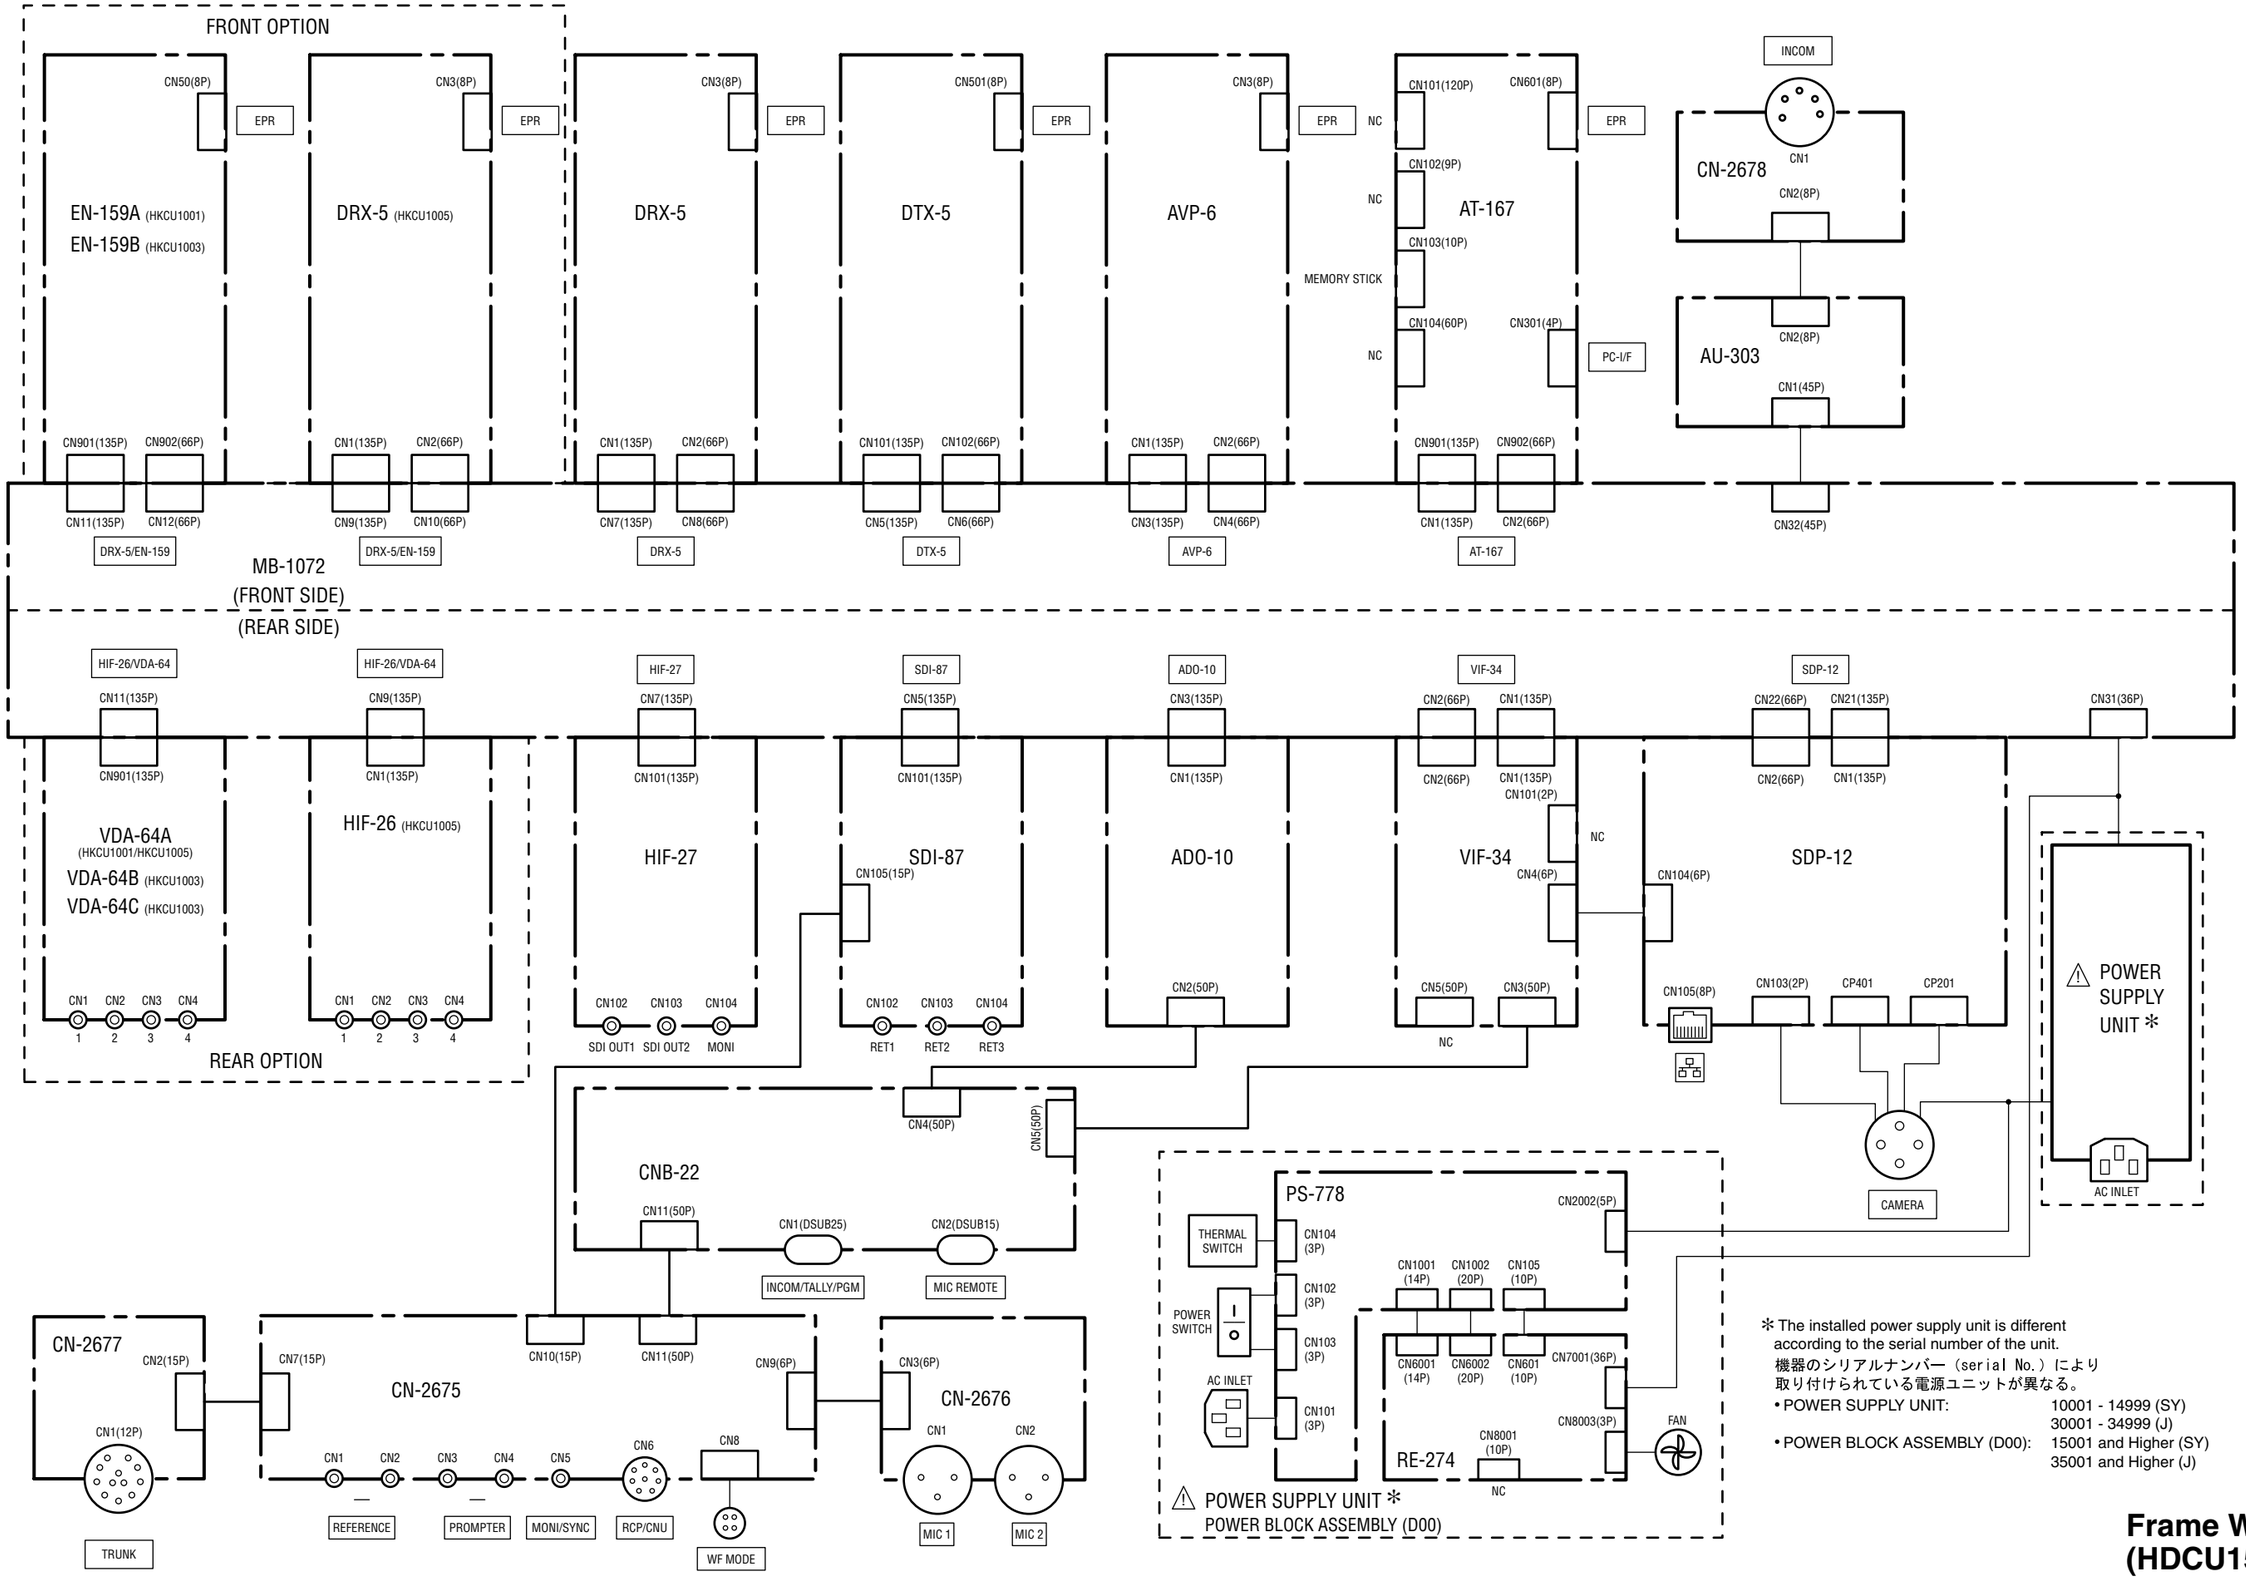

✻ The installed power supply unit is different according to the serial number of the unit.
機器のシリアルナンバー（serial No.）により取り付けられている電源ユニットが異なる。

- POWER SUPPLY UNIT: 10001 - 14999 (SY), 30001 - 34999 (J)
- POWER BLOCK ASSEMBLY (D00): 15001 and Higher (SY), 35001 and Higher (J)

Frame Wiring (HDCU1500)

7-124

Section 8
Board Layouts

Index

Board Name	Page
ADO-10	8-28
AT-167	8-2
AU-302	8-5
AU-303/303G	8-6
AVP-6	8-8
CN-2672	8-10
CN-2673	8-10
CN-2674	8-10
CN-2675	8-10
CN-2676	8-10
CN-2677	8-10
CN-2678	8-11
CN-2700	8-11
CN-2718	8-11
CN-2805	8-11
CN-3275	8-29
CNB-21	8-11
CNB-22	8-18
DRX-5	8-12
DTX-5	8-14
DU-390	8-28
DU-565	8-29
EN-159A	8-16
EN-159B	8-16
HIF-25	8-18
HIF-26	8-19
HIF-27	8-19
MB-1071/1071A	8-20
MB-1072	8-21
PS-778	8-30
PS-780	8-32
PS-781	8-35
RE-274	8-36
RE-276	8-38
SDI-85	8-21
SDI-86	8-22
SDI-87/87G	8-23
SDP-12	8-24
VDA-64A	8-26
VDA-64B	8-26
VDA-64C	8-26
VIF-34B	8-27
VIF-34	8-27

Board List

Board Name	HDCU1000	HDCU1080	HDCU1500	HKCU1001	HKCU1003	HKCU1005
ADO-10/10G*	○	○	○	–	–	–
AT-167	○	○	○	–	–	–
AU-302	○	○	–	–	–	–
AU-303/303G	–	–	○	–	–	–
AVP-6	○	○	○	–	–	–
CN-2672/2672G*	○	○	–	–	–	–
CN-2673	○	○	–	–	–	–
CN-2674/2674G*	○	○	–	–	–	–
CN-2675/2675G*	–	–	○	–	–	–
CN-2676	–	–	○	–	–	–
CN-2677/2677G*	–	–	○	–	–	–
CN-2678	–	–	○	–	–	–
CN-2700	○	○	–	–	–	–
CN-2718	○	○	–	–	–	–
CN-2805/2805G*	○	○	–	–	–	–
CN-3275	○	○	–	–	–	–
CNB-21/21G*	○	○	–	–	–	–
CNB-22/22G*	–	–	○	–	–	–
DRX-5	○	○	○	–	–	○
DTX-5	○	○	○	–	–	–
DU-390	–	○	–	–	–	–
DU-565	–	–	○	–	–	–
EN-159A	–	–	–	○	–	–
EN-159B	–	–	–	–	○	–
HIF-25	○	○	–	–	–	–
HIF-26	–	–	–	–	–	○
HIF-27	–	–	○	–	–	–
MB-1071/1071A	○	○	–	–	–	–
MB-1072/1072G*	–	–	○	–	–	–
PS-778	–	–	○	–	–	–
PS-780	○	○	–	–	–	–
PS-781	○	○	–	–	–	–
RE-274	–	–	○	–	–	–
RE-276	○	○	–	–	–	–
SDI-85	○	○	–	–	–	–
SDI-86/86G*	○	○	–	–	–	–
SDI-87/87G	–	–	○	–	–	–
SDP-12/12C	○	○	○	–	–	–
VDA-64A	–	–	–	○	○	–
VDA-64B	–	–	–	–	○	–
VDA-64C	–	–	–	–	○	–
VIF-34B/34BG*	–	–	○	–	–	–
VIF-34/34G*	○	○	–	–	–	–

注意

＊印の基板は2種類ありますが，マニュアル内の記載では簡素化するため基板名には“G”を付けていません。

Note

The board with an asterisk (*) has two types. However, the board name in the manual does not have “G” at the end for simplification.

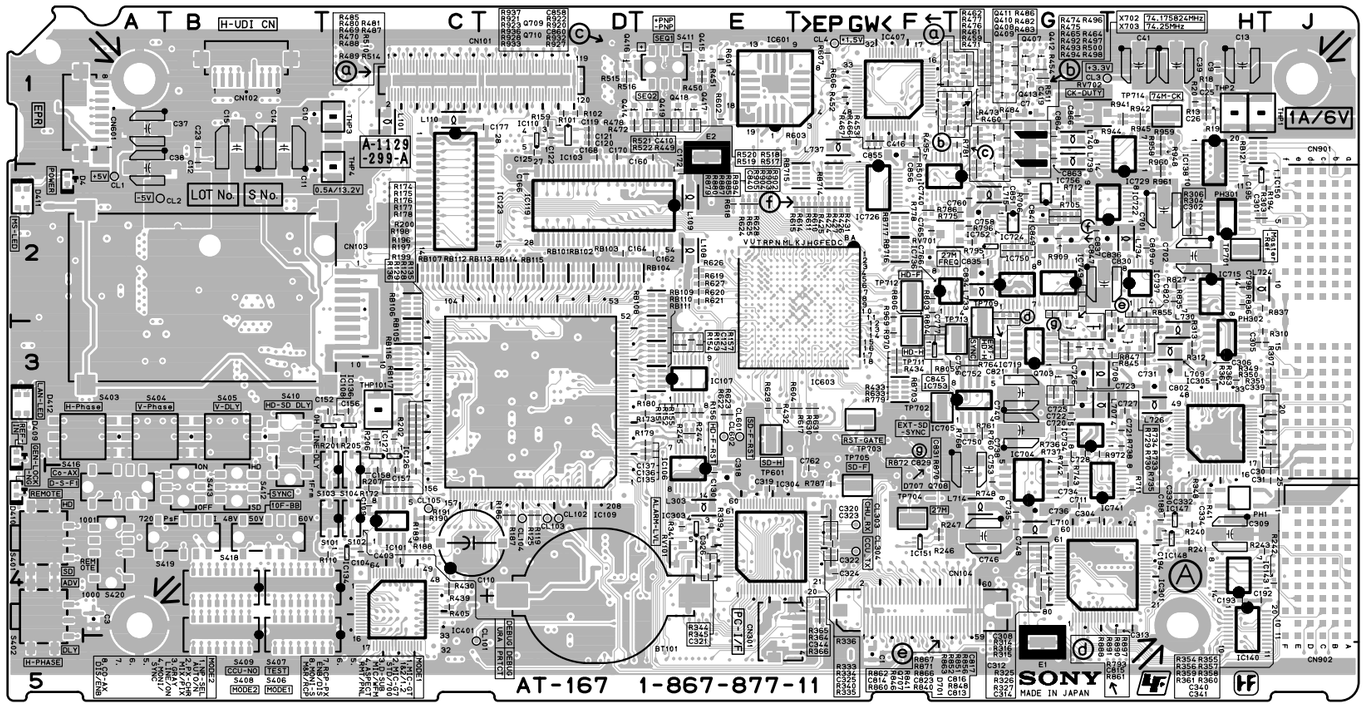

AT-167 -A SIDE-
SUFFIX: -11, 12

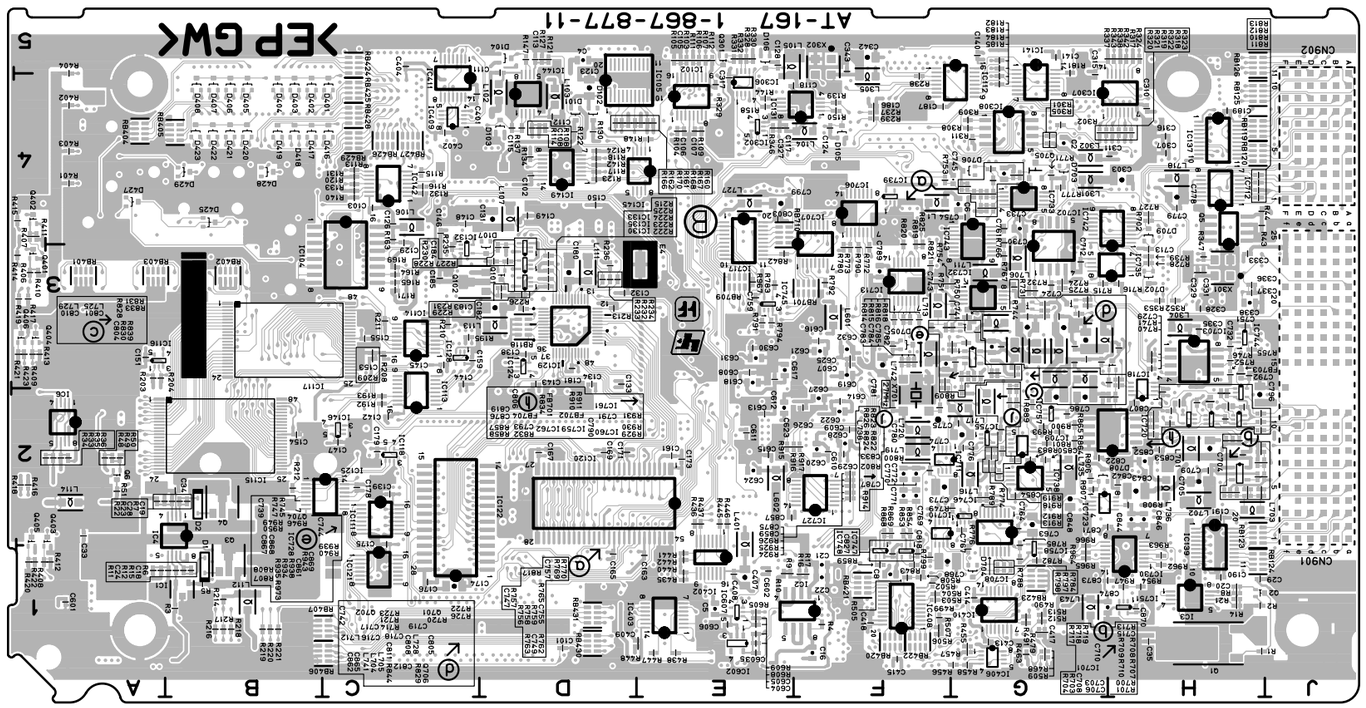

AT-167 -B SIDE-
SUFFIX: -11, 12

AT-167 (1-867-877-11, 12)
---

*:B SIDE

BT101	D4	C153	*C3	C402	*C4	C746	G4	C846	*H2	D701	H3	IC408	*F1	L701	*H2	R7	*B2	R168	*E4	R309	*G4	R433	F3	R601	E1	R759	*G4	R848	H3	R960	H2	S418	B4
		C154	*B2	C403	C4	C747	*G4	C847	G2	D702	*H3	IC409	*C4	L702	*H2	R8	*H1	R169	*C3	R310	H3	R434	F3	R602	E1	R760	G3	R851	H3	R961	H2	S419	B4
C1	F5	C155	*C3	C404	*C5	C748	G4	C848	*G2	D703	*G4	IC410	*G1	L703	*H2	R9	*E1	R170	*D4	R311	*G4	R435	*E1	R603	F1	R761	G3	R852	H3	R962	*H1	S420	A4
C2	*G4	C156	C3	C407	*E1	C749	*G4	C849	G2	D704	*G1	IC411	*C5	L704	*G3	R10	*E1	R171	*C3	R312	H3	R436	*E2	R604	E3	R762	*G4	R853	*F2	R963	*H1		
C3	A4	C157	C4	C408	*E1	C750	G3	C850	*G2	D705	*F3	IC601	E1	L705	*G3	R11	*A1	R172	C4	R313	H3	R437	*E2	R605	*E1	R763	*G4	R854	*F2	R964	*G1	THP1	H1
C4	*D5	C158	C4	C409	*E1	C751	*H3	C851	G2	D706	*G4	IC602	*E1	L706	*G3	R12	*B1	R173	E3	R314	G4	R438	*E1	R606	F1	R764	G3	R855	H2	R965	*G1	THP2	H1
C5	*E1	C159	*C3	C410	E1	C752	G3	C852	*H2	D707	G3	IC603	F2	L707	G3	R13	H1	R174	C3	R315	G4	R439	C4	R607	F1	R765	*G4	R856	H3	R966	*G1	THP3	C1
C6	*G4	C160	E1	C413	*G1	C753	G4	C853	*H2	D708	*G2	IC607	*E1	L708	G3	R14	*H1	R175	C3	R316	G4	R440	*E1	R608	*E1	R766	*G4	R857	*H2	R967	*E3	THP4	C2
C7	G1	C161	*E2	C414	*G1	C754	*G4	C854	*G2	D709	*H4	IC701	*H2	L709	H3	R15	*B1	R176	C3	R317	*H5	R441	*E1	R609	*E1	R767	*G3	R858	*H2	R969	F2	THP101	C3
C8	*F1	C162	E2	C415	*F1	C755	*G4	C855	F1			IC702	*G3	L710	G4	R16	*F1	R177	C3	R318	*H4	R442	*E1	R610	F2	R768	G3	R859	*F1	R970	F3		
C9	H1	C163	*E1	C416	F1	C756	G3	C856	F1	E1	G5	IC703	*H3	L711	*G3	R17	*F1	R178	C3	R319	*H4	R445	*E2	R611	F2	R769	*G4	R860	G3	R972	G3	TP601	E3
C10	B1	C164	D2	C417	*G1	C757	*G4	C857	*E2	E2	E1	IC704	G4	L712	*G3	R18	H1	R179	E3	R320	*G4	R446	*E2	R614	F2	R770	*G4	R861	G3	R973	*G2	TP701	H2
C11	B2	C165	*D1	C418	*F1	C758	G2	C858	G1	E4	*E3	IC705	G3	L713	*F3	R19	H1	R180	E3	R321	*G4	R447	*E1	R615	F2	R771	*G4	R862	G3			TP702	F3
C12	B1	C166	D2	C419	G1	C759	*E3	C859	*F2			IC706	*F4	L714	G4	R20	H1	R181	*G5	R322	*H4	R448	*E1	R617	F3	R772	*F3	R863	H3	RB101	D2	TP703	F3
C13	H1	C167	*D2	C601	*A1	C760	G2	C860	G1	FB701	*H2	IC707	*F3	L715	G2	R21	*H1	R182	*G5	R323	*H4	R449	E1	R618	E2	R773	*F3	R864	*G2	RB102	D2	TP704	F4
C14	B1	C168	D1	C602	*E1	C761	*G4	C861	*G3	FB702	*H2	IC708	*G2	L716	*G2	R22	*A2	R183	*G5	R324	*H5	R450	E1	R619	E2	R774	*G2	R865	*G2	RB103	D2	TP705	F4
C15	B1	C169	*D2	C603	*E1	C762	F4	C862	*G3	FB703	*H3	IC709	*G2	L717	*G2	R23	*A2	R184	*G4	R325	G4	R451	E1	R620	E2	R775	G2	R866	H3	RB104	D2	TP709	G3
C16	*F1	C170	D1	C604	*E1	C763	*G2	C863	G1	FB704	*H2	IC710	*F2	L718	*H4	R33	*A2	R185	*G4	R326	G4	R452	F1	R621	E2	R776	*G2	R867	H2	RB105	C3	TP711	F3
C18	*B1	C171	*D2	C605	*E1	C764	*G2	C864	G1			IC711	*F2	L719	*F2	R34	*A2	R186	D4	R327	G4	R453	F1	R622	E3	R777	*G4	R868	*F2	RB106	C2	TP712	F2
C19	*B2	C172	E2	C606	*E1	C765	F2	C865	*G3	IC1	*B1	IC712	*H4	L720	*F2	R35	*A2	R187	D4	R328	*E5	R454	G1	R623	E3	R778	F2	R869	*F2	RB107	C2	TP713	G3
C20	*H1	C173	*E2	C607	*F3	C766	F2	C866	G1	IC2	*F1	IC713	*F3	L724	H2	R36	*A2	R188	C4	R329	*E4	R455	*G1	R624	E2	R779	F3	R870	G2	RB108	E2	TP714	H1
C21	*F1	C174	*C1	C608	*E3	C767	*G1	C867	*F3	IC3	*H1	IC715	H2	L725	*G3	R41	H4	R189	C4	R330	*E5	R456	*G1	R625	E2	R780	*F3	R871	H2	RB109	E3		
C22	*F1	C175	*C2	C609	*F2	C768	*F1	C868	*G3	IC4	*B2	IC717	*E4	L726	H3	R43	*H4	R190	C4	R331	*E5	R457	*G1	R626	E2	R781	G1	R872	G2	RB110	E3	X301	*H3
C23	B1	C176	*C1	C610	*F2	C769	*F2	C869	*G3	IC6	*A2	IC718	*H2	L727	*E4	R44	*H4	R191	C4	R332	*E5	R458	*G1	R627	E2	R782	*G1	R879	G2	RB111	E3	X302	*F5
C24	*A1	C177	D1	C611	*E2	C770	*F2	C870	*H1	IC101	C4	IC719	G3	L728	*G3	R48	*A2	R192	*C2	R333	F4	R459	G1	R628	E2	R783	*E3	R880	G2	RB112	C2	X701	*F2
C25	H1	C178	*C2	C612	*E3	C771	*F2	C871	*G2	IC102	*E4	IC720	*H2	L729	*G3	R49	*A2	R193	*C2	R334	F4	R460	G1	R629	E3	R784	*G1	R883	*G2	RB113	D2	X702	G1
C26	H1	C179	*C2	C613	*E2	C772	*F2	C873	*G1	IC103	D1	IC722	H2	L730	H3	R50	*A2	R194	J2	R335	F4	R461	G1	R630	F3	R785	*G2	R885	G2	RB114	D2	X703	G1
C28	*B2	C180	*D3	C614	*F2	C773	*F2	C874	*G1	IC104	*B4	IC723	*G2	L733	G2	R51	*A2	R195	*C3	R336	F4	R462	G1	R631	F3	R786	F2	R887	G2	RB115	D2		
C29	*H1	C181	*D3	C615	*E2	C774	*G2	C875	*F2	IC105	*D4	IC724	G2	L734	H2	R101	D1	R196	C3	R337	*G5	R463	*G1	R633	F3	R787	F4	R888	G2	RB116	C3		
C30	J4	C182	*D3	C616	*F3	C775	*G2	C876	*H2	IC106	E3	IC726	F2	L735	*G2	R102	D1	R197	C3	R338	*H5	R464	G1	R700	*H2	R788	*G1	R889	*G2	RB117	C3		
C31	J4	C183	*D3	C617	*E3	C776	*G2			IC107	E3	IC727	*F2	L736	*H2	R103	*E5	R198	C3	R339	E4	R465	F1	R701	*H2	R789	*G2	R890	G2	RB118	*D3		
C33	*A2	C184	*D3	C618	*E3	C777	F3	CL1	A2	IC108	C3	IC728	*G3	L737	F1	R104	*E4	R199	C4	R340	F4	R466	F1	R702	*H4	R790	*F3	R891	G2	RB119	*H4		
C34	*B2	C185	*C3	C619	*F3	C778	*H4	CL2	A2	IC109	D3	IC729	H2	L738	*G2	R105	*E5	R200	C3	R341	E4	R467	F1	R703	*H2	R791	*E3	R893	*G2	RB120	*H4		
C35	*H1	C186	*F4	C620	*F2	C779	*H4	CL3	G1	IC110	D1	IC730	*H1	L739	G1	R106	*E5	R201	C3	R342	*H5	R468	*G1	R704	*H2	R792	*F3	R894	G2	RB121	H1		
C37	A1	C187	*F4	C621	*F3	C780	*F2	CL4	F1	IC111	*C2	IC732	*G3	L740	G1	R107	*E5	R202	C3	R343	*H5	R469	F1	R705	G2	R793	G3	R897	G2	RB123	*H2		
C38	A2	C188	H4	C622	*F2	C781	*F3	CL101	C5	IC112	*F5	IC733	*G4	L741	*G3	R108	*D4	R203	*A3	R344	E4	R470	F1	R706	G2	R794	*E3	R900	*G2	RB124	*H1		
C39	H1	C189	*H4	C623	*E2	C782	*F3	CL102	D4	IC113	*C2	IC734	H3	L742	*F3	R109	*E4	R204	*A3	R345	E4	R471	G1	R707	*H2	R795	G2	R902	G2	RB125	*H4		
C41	H1	C190	*H1	C624	*E2	C783	*F3	CL103	D4	IC114	*C3	IC735	*H3	L743	*G1	R110	C4	R205	C3	R346	*E4	R472	D1	R708	*H2	R796	G2	R903	G2	RB126	*H5		
C101	*D1	C191	*H2	C625	*F3	C784	*F3	CL104	D4	IC115	*B2	IC736	F2			R111	*E5	R206	C3	R347	*H3	R473	G1	R709	*H2	R797	*G1	R904	G2	RB401	*A3		
C102	*D4	C192	H4	C626	*F2	C785	*F3	CL105	C4	IC116	*A3	IC737	H2	PH1	H4	R112	*E5	R207	C4	R348	H4	R474	F1	R710	*H2	R798	*G1	R905	G2	RB402	*B3		
C103	*C4	C193	H4	C627	*F2	C786	*G2	CL303	F4	IC117	*B3	IC738	*G2	PH301	H2	R113	*C4	R208	*C3	R349	J3	R475	F1	R711	H4	R799	*F1	R906	*G2	RB403	*A3		
C104	C4	C194	H4	C628	*F2	C787	*G2	CL304	F4	IC118	*C2	IC739	*F4	PH302	H3	R114	*D4	R209	*C3	R350	J3	R476	G1	R712	G2	R800	*F2	R907	*G2	RB404	*A4		
C105	*E5	C195	H2	C629	*F2	C789	*F3	CL601	E3	IC119	E2	IC740	G1			R115	*C4	R210	*C3	R351	J3	R477	G1	R713	*H2	R801	*G2	R908	*H2	RB405	*B4		
C106	*E4	C301	H2	C630	*E3	C790	*H2	CL602	E3	IC120	*E2	IC741	H4	Q1	*H1	R116	*C4	R211	*C3	R352	*H3	R478	D1	R714	*G3	R802	*G2	R909	G2	RB406	*C1		
C107	*E4	C302	H2	C631	*E3	C791	*H2			IC121	*C1	IC742	*H4	Q2	*H1	R117	*D4	R212	*B2	R353	*H3	R479	*G1	R715	*G3	R803	F2	R910	*H2	RB407	*C1		
C108	*D4	C303	*H4	C632	*F3	C792	*H3	CN101	D1	IC122	*D1	IC743	*G4	Q3	*B1	R118	*D4	R213	*D3	R354	J3	R480	F1	R716	*H3	R804	F3	R911	*H2	RB420	*F1		
C109	C4	C304	G4	C701	H2	C793	*H2	CN102	B1	IC123	C1	IC744	*H3	Q4	*B2	R119	D4	R214	*B1	R355	J3	R481	G1	R717	*H2	R805	F3	R912	*G2	RB421	*F1		
C110	C4	C305	H3	C702	H2	C796	*H2	CN103	B2	IC124	*D3	IC745	*E3	Q5	*H4	R120	*C4	R215	*D3	R356	J3	R482	G1	R718	*H2	R806	F2	R913	*G2	RB422	*F1		
C111	*D5	C306	H3	C703	*H2	C798	H2	CN104	F4	IC125	*B2	IC746	*G2	Q6	*A2	R121	*D5	R216	*B1	R357	J3	R483	G1	R719	*H2	R807	*F3	R914	*G2	RB423	*G1		
C112	*D4	C307	*H4	C704	*H2	C799	*E4	CN301	E4	IC126	C3	IC747	*F1	Q101	*D3	R122	*D4	R217	*B1	R358	J3	R484	G1	R720	*G3	R808	*F3	R915	*E2	RB424	*C5		
C113	*D5	C308	G4	C705	*H2	C801	*G2	CN601	A1	IC127	C3	IC748	*F1	Q102	*C3	R123	*D4	R218	*B1	R359	J3	R485	F1	R721	*G3	R809	*F2	R916	*E2	RB425	*C4		
C115	*D4	C309	H4	C706	*H2	C802	H3	CN901	J3	IC128	*C3	IC749	G2	Q301	*E5	R124	*D4	R219	*B1	R360	J3	R486	G1	R722	*G3	R810	*H4	R917	*F2	RB426	*C4		
C117	*E4	C310	*H4	C708	*H2	C803	*E4	CN902	J5	IC129	*D3	IC750	G2	Q401	*A3	R125	D4	R220	*B1	R361	J3	R487	G1	R723	*G3	R811	*H4	R918	*G2	RB427	*C4		
C118	*E4	C311	*H4	C709	*H2	C804	*G2			IC130	*D3	IC751	*H1	Q402	*A4	R127	*D5	R221	*B1	R362	H3	R488	F1	R724	*G3	R812	*H4	R919	*G2	RB428	*C4		
C119	D1	C312	G4	C710	*H2	C805	*H3	D1	*B1	IC131	*F4	IC752	G2	Q403	*A2	R128	C4	R222	*D3	R363	H3	R489	F1	R725	*G3	R813	*H4	R920	G1	RB429	*C4		
C120	D1	C313	H4	C711	G4	C806	*H2	D2	*B2	IC132	*C3	IC753	F3	Q404	*A3	R129	C4	R223	*D3	R364	F4	R490	*G1	R726	*G3	R814	*F3	R921	G1	RB430	*D1		
C121	D1	C314	G4	C712	*G3	C807	*H2	D4	A2	IC133	*D3	IC755	*G2	Q405	*A2	R130	*D4	R224	*D3	R365	F4	R491	*G1	R727	*H4	R815	*F3	R922	G1	RB431	*D1		
C122	D1	C315	*G4	C713	*H3	C808	*G3	D101	*D4	IC134	C4	IC756	G2	Q406	*A3	R131	*C4	R225	*D3	R366	F4	R492	F1	R728	*H3	R816	*F3	R923	G1	RB701	*F3		
C123	*D4	C316	*H4	C715	*H2	C809	H2	D102	*D4	IC135	*D3	IC757	*G2	Q407	G1	R132	*C4	R226	*D3	R401	*A4	R493	F1	R729	G3	R817	*G4	R924	*F2	RB703	F3		
C124	*F4	C317	*E4	C716	*G3	C810	*G2	D103	*D4	IC136	C3	IC758	*G1	Q408	G1	R133	*C4	R227	*D3	R402	*A4	R494	F1	R730	G3	R818	*F3	R925	*F2	RB709	*E3		
C125	D1	C318	E4	C717	*G3	C811	*G3	D104	*D5	IC137	*H4	IC759	*H2	Q409	G1	R134	*D4	R228	*D3	R403	*A4	R495	F1	R731	*G3	R819	*F4	R926	*F2	RB710	*E4		
C126	*C4	C319	E4	C718	*G3	C812	*G3	D105	*F4	IC138	H1	IC760	*H2	Q410	G1	R135	C4	R229	*D3	R404	*A5	R496	G1	R732	*G3	R820	*F4	R927	G2	RB714	F2		
C127	E3	C320	F4	C719	*G3	C813	H3	D106	*E5	IC139	*H2	IC761	*H2	Q411	G1	R136	C4	R230	*D3	R405	C4	R497	G1	R733	G3	R821	*F3	R928	G2	RB715	F2		
C128	*E5	C321	E4	C720	G3	C814	G3	D107	*D3	IC140	H4	IC762	*H2	Q412	G1	R137	*D4	R231	*D3	R406	*A3	R498	G1	R734	G3	R822	*G2	R929	*H2	RB716	F2		
C129	*C4	C322	F4	C721	H3	C815	G3	D401	*C4	IC141	*G5			Q413	G1	R139	*F4	R232	*D3	R407	*A4	R499	*F1	R735	G3	R823	*G2	R930	*H2	RB717	F2		
C130	E4	C323	F4	C722	G3	C816	H3	D402	*B4	IC142	*C4	L1	*F4	Q414	D1	R140	*C4	R233	*D3	R408	*A1	R500	G1	R736	G3	R824	*G2	R931	*H2				
C131	*D4	C324	F4	C723	G3	C817	H3	D403	*B4	IC143	H4	L101	C1	Q415	E1	R142	*D4	R234	*D3	R409	*A3	R501	F1	R737	G3	R825	*F4	R932	G2	RV101	E4		
C132	*D3	C325	F4	C724	*G3	C818	*F1	D404	*B4	IC144	*D4	L102	*D4	Q416	D1	R144	*E4	R235	*C3	R410	*A3	R502	*F1	R738	H3	R826	*G2	R933	G2	RV701	F2		
C133	*D3	C326	E4	C725	G3	C819	*H2	D405	*B4	IC145	*E4	L103	*D4	Q417	E1	R147	*D5	R236	*D3	R411	*A4	R503	*F1	R739	*H3	R827	H2	R934	*G3	RV702	G1		
C134	*D3	C327	*E4	C726	G3	C820	H2	D406	*B4	IC146	*C2	L104	*F4	Q418	E1	R148	*E4	R237	*F4	R412	*A1	R504	*F1	R740	*H3	R828	*H3	R935	*G3				
C135	E3	C328	*H3	C727	H3	C821	G3	D407	*B4	IC147	H4	L105	*E5	Q419	E1	R150	*F4	R238	*F4	R413	*A3	R505	*F1	R741	*H3	R829	*G3	R936	G1	S101	C4		
C136	E3	C329	*H3	C728	G3	C822	*G2	D408	*B4	IC148	H4	L106	*C4	Q701	*G3	R151	E3	R239	*F4	R414	*A3	R506	*F1	R742	G4	R830	*H2	R937	G1	S102	C4		
C137	E3	C330	H4	C729	*H3	C823	H3	D409	A3	IC149	*D4	L107	*D4	Q702	*G3	R152	E3	R240	H4	R415	*A4	R507	*F1	R743	G4	R831	*H3	R938	*G3	S103	C4		
C138	*D3	C331	*H3	C730	*G4	C827	*F1	D410	A4	IC150	H2	L108	E2	Q703	G3	R153	E3	R241	H4	R416	*A2	R508	*F1	R744	*G3	R832	*H2	R939	*G3	S104	C4		
C139	*C2	C332	H4	C731	H3	C829	G2	D411	A2	IC151	F4	L109	E2	Q704	*G3	R154	E3	R242	J4	R417	*A3	R509	*G1	R745	*G3	R833	*H3	R940	*G3	S401	A4		
C140	*G5	C333	*H3	C732	*H3	C830	G2	D412	A3	IC301	G4	L110	C1	Q705	*G4	R155	E3	R243	H4	R418	*A2	R510	G1	R746	*H3	R834	*H2	R941	H1	S402	A4		
C141	*G5	C334	H4	C733	*G4	C831	G2	D416	*C4	IC302	*E4	L111	*D3	Q706	*H3	R156	E3	R244	E3	R419	*A3	R511	G1	R747	*F3	R835	H2	R942	H1	S403	A3		
C142	*C2	C335	*H3	C734	G4	C833	*G2	D417	*B4	IC303	E4	L112	*B1	Q707	G3	R157	E3	R245	E3	R420	*A1	R512	*G1	R748	G4	R836	H2	R943	*G3	S404	A3		
C143	*D3	C336	*H3	C735	G4	C834	G2	D418	*B4	IC304	E4	L113	*D3	Q708	G3	R158	*E4	R246	F4	R421	*A3	R513	*G1	R749	*G2	R837	H2	R944	H1	S405	B3		
C144	*C3	C337	*H3	C736	G4	C835	G2	D419	*B4	IC305	H3	L114	*A2	Q709	G1	R159	D1	R247	F4	R422	*A1	R514	G1	R750	*G3	R839	*H2	R945	H1	S406	B4		
C145	*C3	C338	*H3	C738	G3	C836	G2	D420	*B4	IC306	*E4	L301	*G4	Q710	G2	R160	*E4	R301	*G4	R423	*A3	R515	D1	R751	*F3	R840	H3	R946	*G3	S407	B4		
C146	*C4	C339	J3	C739	*F3	C837	G2	D421	*B4	IC307	*G4	L302	*G4			R161	*D4	R302	*G4	R424	F2	R516	D1	R752	*H3	R841	G3	R947	*H1	S408	B4		
C147	*C2	C340	J3	C740	G3	C840	G2	D422	*B4	IC308	*G4	L303	E4	R1	*H1	R162	*D4	R303	H2	R425	F2	R517	E1	R753	*F4	R842	*E3	R948	H1	S409	B4		
C148	*C4	C341	J3	C741	*G3	C841	G2	D423	*B4	IC401	C4	L304	*H3	R2	*H1	R163	*C4	R304	H2	R426	F2	R518	E1	R754	*G3	R843	*F1	R949	*G3	S410	B3		
C149	*D4	C342	*F5	C742	*G3	C842	*H2	D425	*B4	IC402	*E2	L305	*F4	R3	*B1	R164	*C3	R305	*G4	R427	F2	R519	E1	R755	*H3	R844	*G3	R950	*G3	S411	E1		
C150	*D4	C343	*F5	C743	*F3	C843	*H2	D427	*A4	IC403	*E1	L401	*E2	R4	*F1	R165	*C3	R306	H2	R430	C4	R520	E1	R756	*G4	R845	H3	R954	*H1	S412	B4		
C151	*A3	C344	F4	C744	*G3	C844	*H2	D428	*B4	IC406	*G1	L601	*F3	R5	*B1	R166	*D4	R307	J3	R431	F2	R521	E1	R757	*G4	R846	G3	R958	H1	S413	B4		
C152	C3	C401	*C4	C745	*G4	C845	F3	D429	*B4	IC407	F1	L602	*E2	R6	*B1	R167	*E4	R308	*G4	R432	E3	R522	E1	R758	*G4	R847	H3	R959	H1	S416	A4		

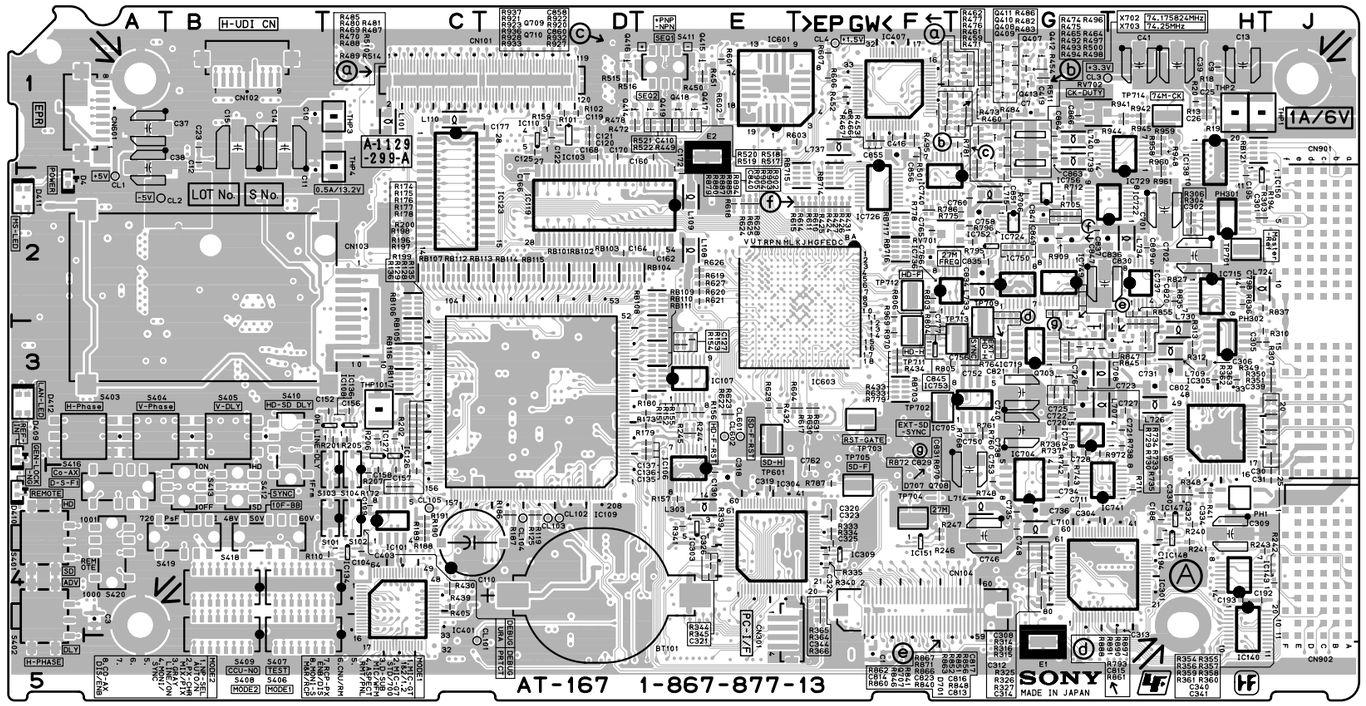

AT-167 -A SIDE-
SUFFIX: -13, 31

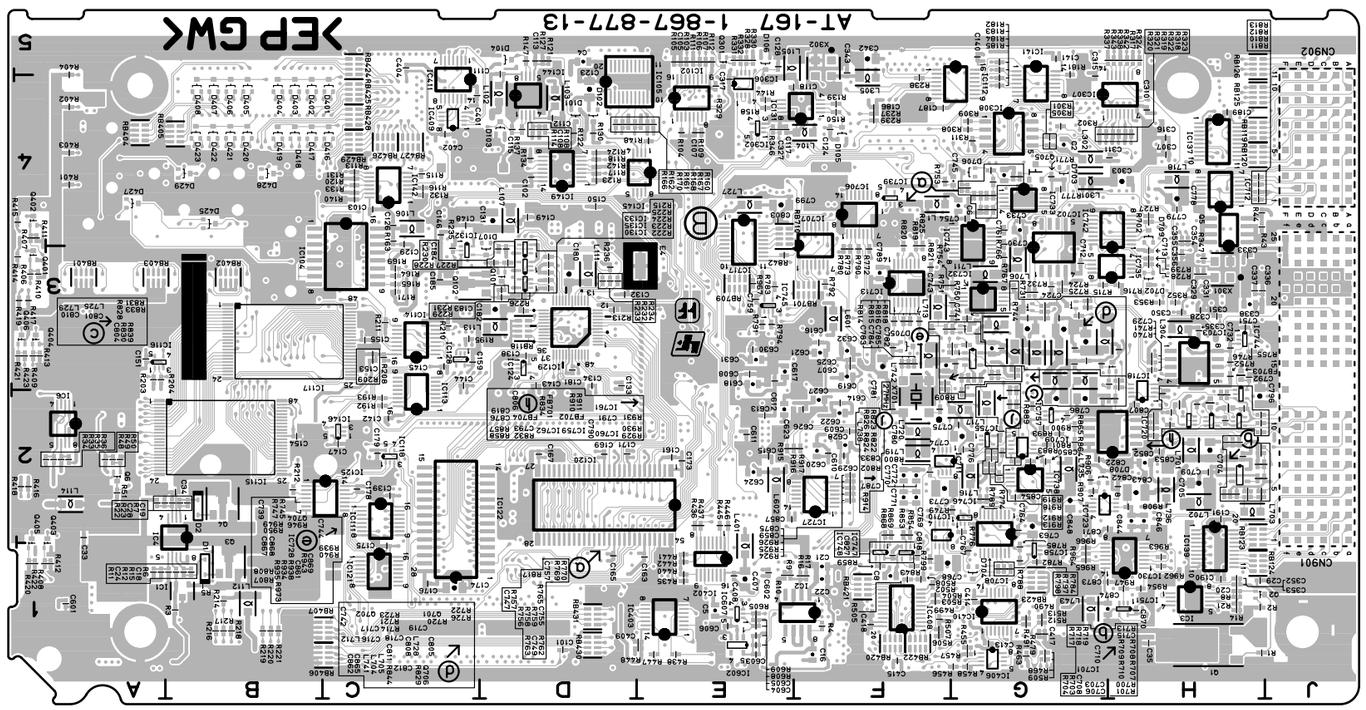

AT-167 -B SIDE-
SUFFIX: -13, 31

AT-167 (1-867-877-13, 31)
---

*:B SIDE

BT101	D4	C154	*B2	C353	*H1	C741	*G3	C841	G2	D427	*A4	IC402	*E2	L305	*F4	R3	*B1	R164	*C3	R305	*G4	R430	C4	R520	E1	R756	*G4	R845	H3	R954	*H1	S413	B4
		C155	*C3	C354	*H4	C742	*G3	C842	*H2	D428	*B4	IC403	*E1	L401	*E1	R4	*F1	R165	*C3	R306	H2	R431	F2	R521	E1	R757	*G4	R846	G3	R958	H1	S416	A4
C1	F5	C156	C3	C355	*H4	C743	*F3	C843	*H2	D429	*B4	IC406	*G1	L601	*F3	R5	*B1	R166	*D4	R307	J3	R432	E3	R522	E1	R758	*G4	R847	H3	R959	H1	S418	B4
C2	*G4	C157	C4	C356	*H3	C744	*G3	C844	*H2	D701	H3	IC407	F1	L602	*E2	R6	*B1	R167	*E4	R308	*G4	R433	F3	R601	E1	R759	*G4	R848	H3	R960	H2	S419	B4
C3	A4	C158	C4	C401	*C4	C745	*G4	C845	F3	D702	*H3	IC408	*F1	L701	*H2	R7	*B2	R168	*E4	R309	*G4	R434	F3	R602	E1	R760	G3	R851	H3	R961	H2	S420	A4
C4	*D5	C159	*C3	C402	*C4	C746	G4	C846	*H2	D703	*G4	IC409	*C4	L702	*H2	R8	*H1	R169	*C3	R310	H3	R435	*E1	R603	F1	R761	G3	R852	H3	R962	*H1		
C5	*E1	C160	E1	C403	C4	C747	*G4	C847	G2	D704	*G1	IC410	*G1	L703	*H2	R9	*E1	R170	*D4	R311	*G4	R436	*E2	R604	E3	R762	*G4	R853	*F2	R963	*H1	THP1	H1
C6	*G4	C161	*E2	C404	*C5	C748	G4	C848	*G2	D705	*F3	IC411	*C5	L704	*G3	R10	*E1	R171	*C3	R312	H3	R437	*E2	R605	*E1	R763	*G4	R854	*F2	R964	*G1	THP2	H1
C7	G1	C162	E2	C407	*E1	C749	*G4	C849	G2	D706	*G4	IC601	E1	L705	*G3	R11	*A1	R172	C4	R313	H3	R438	*E1	R606	F1	R764	G3	R855	H2	R965	*G1	THP3	C1
C8	*F1	C163	*E1	C408	*E1	C750	G3	C850	*G2	D707	G3	IC602	*E1	L706	*G3	R12	*B1	R173	E3	R314	G4	R439	C4	R607	F1	R765	*G4	R856	H3	R966	*G1	THP4	C1
C9	H1	C164	D2	C409	*E1	C751	*H3	C851	G2	D708	*G2	IC603	F2	L707	G3	R13	H1	R174	C3	R315	G4	R440	*E1	R608	*E1	R766	*G4	R857	*H2	R967	*E3	THP101	C3
C10	B1	C165	*D1	C410	E1	C752	G3	C852	*H2	D709	*H4	IC607	*E1	L708	G3	R14	*H1	R175	C3	R316	G4	R441	*E1	R609	*E1	R767	*G3	R858	*H2	R969	F2		
C11	B2	C166	D2	C413	*G1	C753	G4	C853	*H2			IC701	*H2	L709	H3	R15	*B1	R176	C3	R317	*H5	R442	*E1	R610	F2	R768	G3	R859	*F1	R970	F3	TP601	E3
C12	B1	C167	*D2	C414	*G1	C754	*G4	C854	*G2	E1	G5	IC702	*G3	L710	G4	R16	*F1	R177	C3	R318	*H4	R445	*E2	R611	F2	R769	*G4	R860	G3	R972	G3	TP701	H2
C13	H1	C168	D1	C415	*F1	C755	*G4	C855	F1	E2	E1	IC703	*H3	L711	*G3	R17	*F1	R178	C3	R319	*H4	R446	*E2	R614	F2	R770	*G4	R861	G3	R973	*G2	TP702	F3
C14	B1	C169	*D2	C416	F1	C756	G3	C856	F1	E4	*E3	IC704	G4	L712	*G3	R18	H1	R179	E3	R320	*G4	R447	*E1	R615	F2	R771	*G4	R862	G3			TP703	F3
C15	B1	C170	D1	C417	*G1	C757	*G4	C857	*E2			IC705	G3	L713	*F3	R19	H1	R180	E3	R321	*G4	R448	*E1	R617	F3	R772	*F3	R863	H3	RB101	D2	TP704	F4
C16	*F1	C171	*D2	C418	*F1	C758	G2	C858	G1	FB701	*H2	IC706	*F4	L714	G4	R20	H1	R181	*G5	R322	*H4	R449	E1	R618	E2	R773	*F3	R864	*G2	RB102	D2	TP705	F4
C18	*B1	C172	E2	C419	G1	C759	*E3	C859	*F2	FB702	*H2	IC707	*F3	L715	G2	R21	*H1	R182	*G5	R323	*H4	R450	E1	R619	E2	R774	*G2	R865	*G2	RB103	D2	TP709	G3
C19	*B2	C173	*E2	C601	*A1	C760	G2	C860	G1	FB703	*H3	IC708	*G2	L716	*G2	R22	*A2	R183	*G5	R324	*H5	R451	E1	R620	E2	R775	G2	R866	H3	RB104	D2	TP711	F3
C20	*H1	C174	*C1	C602	*E1	C761	*G4	C861	*G3	FB704	*H2	IC709	*G2	L717	*G2	R23	*A2	R184	*G4	R325	G4	R452	F1	R621	E2	R776	*G2	R867	H2	RB105	C3	TP712	F2
C21	*F1	C175	*C1	C603	*E1	C762	F4	C862	*G3			IC710	*F2	L718	*H4	R33	*A2	R185	*G4	R326	G4	R453	F1	R622	E3	R777	*G4	R868	*F2	RB106	C2	TP713	G3
C22	*F1	C176	*C1	C604	*E1	C763	*G2	C863	G1	IC1	*B1	IC711	*F2	L719	*F2	R34	*A2	R186	D4	R327	G4	R454	G1	R623	E3	R778	F2	R869	*F2	RB107	C2	TP714	H1
C23	B1	C177	D1	C605	*E1	C764	*G2	C864	G1	IC2	*F1	IC712	*H4	L720	*F2	R35	*A2	R187	D4	R328	*E5	R455	*G1	R624	E2	R779	F3	R870	G2	RB108	E2		
C24	*A1	C178	*C2	C606	*E1	C765	F2	C865	*G3	IC3	*H1	IC713	*F3	L724	H2	R36	*A2	R188	C4	R329	*E4	R456	*G1	R625	E2	R780	*F3	R871	H2	RB109	E3	X301	*H3
C25	H1	C179	*C2	C607	*F3	C766	F2	C866	G1	IC4	*B2	IC715	H2	L725	*G3	R41	H4	R189	C4	R330	*E5	R457	*G1	R626	E2	R781	G1	R872	G2	RB110	E3	X302	*F5
C26	H1	C180	*D3	C608	*E3	C767	*G1	C867	*F3	IC6	*A2	IC717	*E4	L726	H3	R43	*H4	R190	C4	R331	*E5	R458	*G1	R627	E2	R782	*G1	R879	G2	RB111	E3	X701	*F2
C28	*B2	C181	*D3	C609	*F2	C768	*F1	C868	*G3	IC101	C4	IC718	*H2	L727	*E4	R44	*H4	R191	C4	R332	*E5	R459	G1	R628	E2	R783	*E3	R880	G2	RB112	C2	X702	G1
C29	*H1	C182	*D3	C610	*F2	C769	*F2	C869	*G3	IC102	*E4	IC719	G3	L728	*G3	R48	*A2	R192	*C2	R333	F4	R460	G1	R629	E3	R784	*G1	R883	*G2	RB113	D2	X703	G1
C30	J4	C183	*D3	C611	*E2	C770	*F2	C870	*H1	IC103	D1	IC720	*H2	L729	*G3	R49	*A2	R193	*C2	R334	F4	R461	G1	R630	F3	R785	*G1	R885	G2	RB114	D2		
C31	J4	C184	*D3	C612	*E3	C771	*F2	C871	*G2	IC104	*B4	IC722	H2	L730	H3	R50	*A2	R194	J2	R335	F4	R462	G1	R631	F3	R786	F2	R887	G2	RB115	D2		
C33	*A2	C185	*C3	C613	*E2	C772	*F2	C873	*G1	IC105	*D4	IC723	*G2	L733	G2	R51	*A2	R195	*C3	R337	*G5	R463	*G1	R633	F3	R787	F4	R888	G2	RB116	C3		
C34	*B2	C186	*F4	C614	*F2	C773	*F2	C874	*G1	IC106	E3	IC724	G2	L734	H2	R101	D1	R196	C3	R338	*H5	R464	G1	R700	*H2	R788	*G1	R889	*G2	RB117	C3		
C35	*H1	C187	*F4	C615	*E2	C774	*G2	C875	*F2	IC107	E3	IC726	F2	L735	*G2	R102	D1	R197	C3	R339	E4	R465	F1	R701	*H2	R789	*G2	R890	G2	RB118	*D3		
C37	A1	C188	H4	C616	*F3	C775	*G2	C876	*H2	IC108	C3	IC727	*F2	L736	*H2	R103	*E5	R198	C3	R340	F4	R466	F1	R702	*H4	R790	*F3	R891	G2	RB119	*H4		
C38	A2	C189	*H4	C617	*E3	C776	*G2			IC109	D3	IC728	*G3	L737	F1	R104	*E4	R199	C4	R341	E4	R467	F1	R703	*H2	R791	*E3	R893	*G2	RB120	*H4		
C39	H1	C190	*H1	C618	*E3	C777	F3	CL1	A2	IC110	D1	IC729	H1	L738	*G2	R105	*E5	R200	C3	R342	*H5	R468	*G1	R704	*H2	R792	*F3	R894	G2	RB121	H1		
C41	H1	C191	*H2	C619	*F3	C778	*H4	CL2	A2	IC111	*C2	IC730	*H1	L739	G1	R106	*E5	R201	C3	R343	*H5	R469	F1	R705	G2	R793	G3	R897	G2	RB123	*H2		
C101	*D1	C192	H4	C620	*F2	C779	*H4	CL3	G1	IC112	*F5	IC732	*G3	L740	G1	R107	*E5	R202	C3	R344	E4	R470	F1	R706	G2	R794	*E3	R900	*G2	RB124	*H1		
C102	*D4	C193	H4	C621	*F3	C780	*F2	CL4	F1	IC113	*C2	IC733	*G4	L741	*G3	R108	*D4	R203	*A3	R345	E4	R471	G1	R707	*H2	R795	G2	R902	G2	RB125	*H4		
C103	*C4	C194	H4	C622	*F2	C781	*F3	CL101	C5	IC114	*C3	IC734	H3	L742	*F3	R109	*E4	R204	*A3	R346	*E4	R472	D1	R708	*H2	R796	G2	R903	G2	RB126	*H5		
C104	C4	C195	H2	C623	*E2	C782	*F3	CL102	D4	IC115	*B2	IC735	*H3	L743	*G1	R110	C4	R205	C3	R347	*H3	R473	G1	R709	*H2	R797	*G1	R904	G2	RB401	*A3		
C105	*E5	C301	H2	C624	*E2	C783	*F3	CL103	D4	IC116	*A3	IC736	F2			R111	*E5	R206	C3	R348	H4	R474	F1	R710	*H2	R798	*G1	R905	G2	RB402	*B3		
C107	*E4	C302	H2	C625	*F3	C784	*F3	CL104	D4	IC117	*B3	IC737	H2	PH1	H4	R112	*E5	R207	C4	R349	J3	R475	F1	R711	H4	R799	*F1	R906	*G2	RB403	*A3		
C108	*D4	C303	*H4	C626	*F2	C785	*F3	CL105	C4	IC118	*C2	IC738	*G2	PH301	H2	R113	*C4	R208	*C3	R350	J3	R476	G1	R712	G2	R800	*F2	R907	*G2	RB404	*A4		
C109	C4	C304	G4	C627	*F2	C786	*G2	CL601	E3	IC119	E2	IC739	*F4	PH302	H3	R114	*D4	R209	*C3	R351	J3	R477	G1	R713	*H2	R801	*G2	R908	*H2	RB405	*B4		
C110	C4	C305	H3	C628	*F2	C787	*G2	CL602	E3	IC120	*E2	IC740	G1			R115	*C4	R210	*C3	R352	*H3	R478	D1	R714	*G3	R802	*G2	R909	G2	RB406	*C1		
C111	*D5	C306	H3	C629	*F2	C789	*F3			IC121	*C1	IC741	H4	Q1	*H1	R116	*C4	R211	*C3	R353	*H3	R479	*G1	R715	*G3	R803	F2	R910	*H2	RB407	*C1		
C112	*D4	C307	*H4	C630	*E3	C790	*H2	CN101	D1	IC122	*D1	IC742	*H4	Q2	*H1	R117	*D4	R212	*B2	R354	J3	R480	F1	R716	*H3	R804	F3	R911	*H2	RB420	*F1		
C113	*D5	C308	G4	C631	*E3	C791	*H2	CN102	B1	IC123	C1	IC743	*G4	Q3	*B1	R118	*D4	R213	*D3	R355	J3	R481	G1	R717	*H2	R805	F3	R912	*G2	RB421	*F1		
C115	*D4	C309	H4	C632	*F3	C792	*H3	CN103	B2	IC124	*D3	IC744	*H3	Q4	*B2	R119	D4	R214	*B1	R356	J3	R482	G1	R718	*H2	R806	F2	R913	*G2	RB422	*F1		
C117	*E4	C310	*H4	C701	H2	C793	*H2	CN104	F4	IC125	*B2	IC745	*E3	Q5	*H4	R120	*C4	R215	*D3	R357	J3	R483	G1	R719	*H2	R807	*F3	R914	*G2	RB423	*G1		
C118	*E4	C311	*H4	C702	H2	C796	*H2	CN301	E4	IC126	C3	IC746	*G2	Q6	*A2	R121	*D5	R216	*B1	R358	J3	R484	G1	R720	*G3	R808	*F3	R915	*E2	RB424	*C5		
C119	D1	C312	G4	C703	*H2	C798	H2	CN601	A1	IC127	C3	IC747	*F1	Q101	*D3	R122	*D4	R217	*B1	R359	J3	R485	F1	R721	*G3	R809	*F2	R916	*E2	RB425	*C4		
C120	D1	C313	H4	C704	*H2	C799	*E4	CN901	J3	IC128	*C3	IC748	*F1	Q102	*C3	R123	*D4	R218	*B1	R360	J3	R486	G1	R722	*G3	R810	*H4	R917	*F2	RB426	*C4		
C121	D1	C314	G4	C705	*H2	C801	*G2	CN902	J5	IC129	*D3	IC749	G2	Q301	*E5	R124	*D4	R219	*B1	R361	J3	R487	G1	R723	*G3	R811	*H4	R918	*G2	RB427	*C4		
C122	D1	C315	*G4	C706	*H2	C802	H3			IC130	*D3	IC750	G2	Q401	*A3	R125	D4	R220	*B1	R362	H3	R488	F1	R724	*G3	R812	*H4	R919	*G2	RB428	*C4		
C123	*D4	C316	*H4	C708	*H2	C803	*E4	D1	*B1	IC131	*F4	IC751	*H1	Q402	*A4	R127	*D5	R221	*B1	R363	H3	R489	F1	R725	*G3	R813	*H4	R920	G1	RB429	*C4		
C124	*F4	C317	*E4	C709	*H2	C804	*G2	D2	*B2	IC132	*C3	IC752	G2	Q403	*A1	R128	C4	R222	*D3	R364	F4	R490	*G1	R726	*G3	R814	*F3	R921	G1	RB430	*D1		
C125	D1	C318	E4	C710	*H2	C805	*H3	D4	A2	IC133	*D3	IC753	F3	Q404	*A3	R129	C4	R223	*D3	R365	F4	R491	*G1	R727	*H4	R815	*F3	R922	G1	RB431	*D1		
C126	*C4	C319	E4	C711	G4	C806	*H2	D101	*D4	IC134	C4	IC755	*G2	Q405	*A1	R130	*D4	R224	*D3	R366	F4	R492	F1	R728	*H3	R816	*F3	R923	G1	RB701	*F3		
C127	E3	C320	F4	C712	*G3	C807	*H2	D102	*D4	IC135	*D3	IC756	G2	Q406	*A3	R131	*C4	R225	*D3	R401	*A4	R493	F1	R729	G3	R817	*G4	R924	*F2	RB703	F3		
C128	*E5	C321	E4	C713	*H3	C808	*G3	D103	*D4	IC136	C3	IC757	*G2	Q407	G1	R132	*C4	R226	*D3	R402	*A4	R494	F1	R730	G3	R818	*F3	R925	*F2	RB709	*E3		
C129	*C4	C323	F4	C715	*H2	C809	H2	D104	*D5	IC137	*H4	IC758	*G1	Q408	G1	R133	*C4	R227	*D3	R403	*A4	R495	F1	R731	*G3	R819	*F4	R926	*F2	RB710	*E4		
C130	E4	C324	F4	C716	*G3	C810	*G2	D105	*F4	IC138	H1	IC759	*H2	Q409	G1	R134	*D4	R228	*D3	R404	*A5	R496	G1	R732	*G3	R820	*F4	R927	G2	RB714	F2		
C131	*D4	C325	F4	C717	*G3	C811	*G3	D106	*E5	IC139	*H2	IC760	*H2	Q410	G1	R135	C4	R229	*D3	R405	C4	R497	G1	R733	G3	R821	*F3	R928	G2	RB715	F2		
C132	*D3	C326	E4	C718	*G3	C812	*G3	D107	*D3	IC140	H4	IC761	*H2	Q411	G1	R136	C4	R230	*D3	R406	*A3	R498	G1	R734	G3	R822	*G2	R929	*H2	RB716	F2		
C133	*D3	C327	*E4	C719	*G3	C813	H3	D401	*C4	IC141	*G5	IC762	*H2	Q412	G1	R137	*D4	R231	*D3	R407	*A4	R499	*F1	R735	G3	R823	*G2	R930	*H2	RB717	F2		
C134	*D3	C328	*H3	C720	G3	C814	G3	D402	*B4	IC142	*C4			Q413	G1	R139	*F4	R232	*D3	R408	*A1	R500	G1	R736	G3	R824	*G2	R931	*H2				
C135	E3	C329	*H3	C721	H3	C815	G3	D403	*B4	IC143	H4	L1	*F4	Q414	D1	R140	*C4	R233	*D3	R409	*A3	R501	F1	R737	G3	R825	*F4	R932	G1	RV701	F2		
C136	E3	C330	H4	C722	G3	C816	H3	D404	*B4	IC144	*D4	L101	C1	Q415	E1	R142	*D4	R234	*D3	R410	*A3	R502	*F1	R738	H3	R826	*G2	R933	G2	RV702	G1		
C137	E3	C331	*H3	C723	G3	C817	H3	D405	*B4	IC145	*E4	L102	*D4	Q416	D1	R144	*E4	R235	*C3	R411	*A4	R503	*F1	R739	*H3	R827	H2	R934	*G3				
C138	*D3	C332	H4	C724	*G3	C818	*F1	D406	*B4	IC146	*C2	L103	*D4	Q417	E1	R147	*D5	R236	*D3	R412	*A1	R504	*F1	R740	*H3	R828	*H3	R935	*G3	S101	C4		
C139	*C2	C333	*H3	C725	G3	C819	*H2	D407	*B4	IC147	H4	L104	*F4	Q418	E1	R148	*E4	R237	*F4	R413	*A3	R505	*F1	R741	*H3	R829	*G3	R936	G1	S102	C4		
C140	*G5	C334	H4	C726	G3	C820	H2	D408	*B4	IC148	H4	L105	*E5	Q419	E1	R150	*F4	R238	*F4	R414	*A3	R506	*F1	R742	G4	R830	*H2	R937	G1	S103	C4		
C141	*G5	C335	*H3	C727	H3	C821	G3	D409	A3	IC149	*D4	L106	*C4	Q701	*G3	R151	E3	R239	*F4	R415	*A4	R507	*F1	R743	G4	R831	*H3	R938	*G3	S104	C4		
C142	*C2	C336	*H3	C728	G3	C822	*G2	D410	A4	IC150	H2	L107	*D4	Q702	*G3	R152	E3	R240	H4	R416	*A2	R508	*F1	R744	*G3	R832	*H2	R939	*G3	S401	A4		
C143	*D3	C337	*H3	C729	*H3	C823	H3	D411	A2	IC151	F4	L108	E2	Q703	G3	R153	E3	R241	H4	R417	*A3	R509	*G1	R745	*G3	R833	*H3	R940	*G3	S402	A4		
C144	*C3	C338	*H3	C730	*G4	C827	*F1	D412	A3	IC301	G4	L109	E2	Q704	*G3	R154	E3	R242	J4	R418	*A2	R510	G1	R746	*H3	R834	*H2	R941	H1	S403	A3		
C145	*C3	C339	J3	C731	H3	C829	G2	D416	*C4	IC302	*E4	L110	C1	Q705	*G4	R155	E3	R243	H4	R419	*A3	R511	G1	R747	*F3	R835	H2	R942	H1	S404	A3		
C146	*C4	C340	J3	C732	*H3	C830	G2	D417	*B4	IC303	E4	L111	*D3	Q706	*H3	R156	E3	R244	E3	R420	*A1	R512	*G1	R748	G4	R836	H2	R943	*G3	S405	B3		
C147	*C2	C341	J3	C733	*G4	C831	G2	D418	*B4	IC304	E4	L112	*B1	Q707	G3	R157	E4	R245	E3	R421	*A3	R513	*G1	R749	*G2	R837	H2	R944	H1	S406	B4		
C148	*C4	C342	*F5	C734	G4	C833	*G2	D419	*B4	IC305	H3	L113	*D3	Q708	G3	R158	*E4	R246	F4	R422	*A1	R514	G1	R750	*G3	R839	*H2	R945	H1	S407	B4		
C149	*D4	C343	*F5	C735	G4	C834	G2	D420	*B4	IC306	*E4	L114	*A2	Q709	G1	R159	D1	R247	F4	R423	*A3	R515	D1	R751	*F3	R840	H3	R946	*G3	S408	B4		
C150	*D4	C344	F4	C736	G4	C835	G2	D421	*B4	IC307	*G4	L301	*G4	Q710	G1	R160	*E4	R301	*G4	R424	F2	R516	D1	R752	*H3	R841	G3	R947	*H1	S409	B4		
C151	*A3	C350	*H3	C738	G3	C836	G2	D422	*B4	IC308	*G4	L302	*G4			R161	*D4	R302	*G4	R425	F2	R517	E1	R753	*F4	R842	*E3	R948	H1	S410	B3		
C152	C3	C351	*H3	C739	*F3	C837	G2	D423	*B4	IC309	F4	L303	E4	R1	*H1	R162	*D4	R303	H2	R426	F2	R518	E1	R754	*G3	R843	*F1	R949	*G3	S411	E1		
C153	*C3	C352	*H1	C740	G3	C840	G2	D425	*B4	IC401	C4	L304	*H3	R2	*H1	R163	*C4	R304	H2	R427	F2	R519	E1	R755	*H3	R844	*G3	R950	*G3	S412	B4		

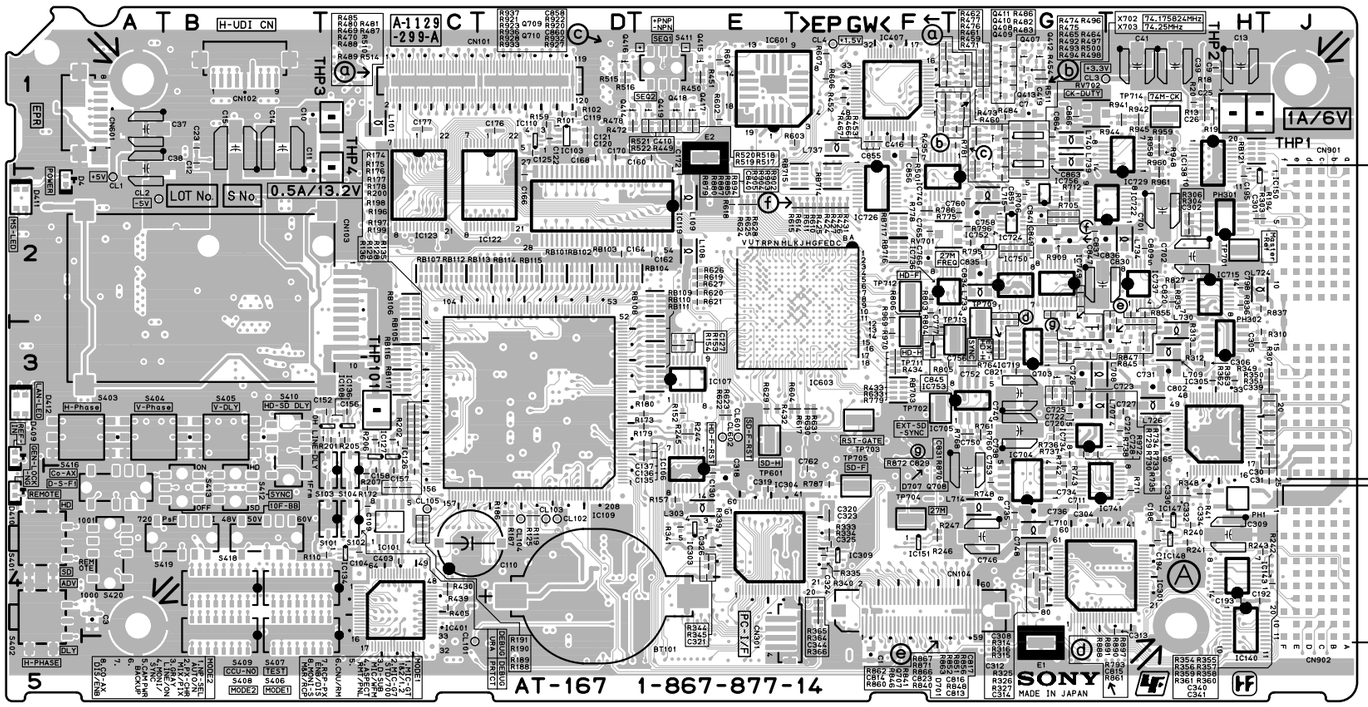

AT-167 -A SIDE-
SUFFIX: -14

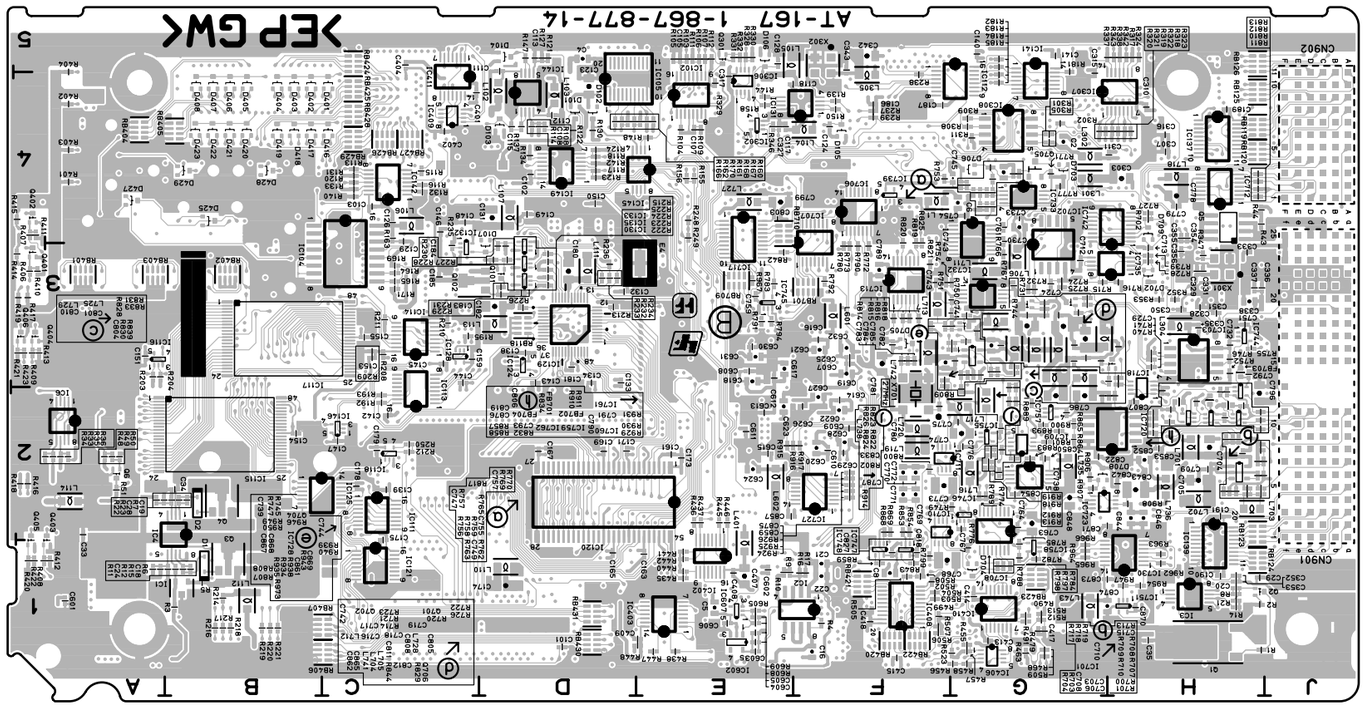

AT-167 -B SIDE-
SUFFIX: -14

AT-167 (1-867-877-14)
---

*:B SIDE

BT101	D4	C154	*B2	C353	*H1	C741	*G3	C841	G2	D427	*A4	IC402	*E2	L305	*F4	R2	*H1	R164	*C3	R302	*G4	R425	F2	R517	E1	R752	*H3	R841	G3	R947	*H1	S409	B4
		C155	*C3	C354	*H4	C742	*G3	C842	*H2	D428	*B4	IC403	*E1	L401	*E1	R3	*B1	R165	*C3	R303	H2	R426	F2	R518	E1	R753	*F4	R842	*E3	R948	H1	S410	B3
C1	F5	C156	C3	C355	*H4	C743	*F3	C843	*H2	D429	*B4	IC406	*G1	L601	*F3	R4	*F1	R166	*D4	R304	H2	R427	F2	R519	E1	R754	*G3	R843	*F1	R949	*G3	S411	E1
C2	*G4	C157	C4	C356	*H3	C744	*G3	C844	*H2	D701	H3	IC407	F1	L602	*E2	R5	*B1	R167	*E4	R305	*G4	R430	C4	R520	E1	R755	*H3	R844	*G3	R950	*G3	S412	B4
C3	A4	C158	C4	C401	*C4	C745	*G4	C845	F3	D702	*H3	IC408	*F1	L701	*H2	R6	*B1	R168	*E4	R306	H2	R431	F2	R521	E1	R756	*G4	R845	H3	R954	*H1	S413	B4
C4	*D5	C159	*C3	C402	*C4	C746	G4	C846	*H2	D703	*G4	IC409	*C4	L702	*H2	R7	*B2	R169	*C3	R307	J3	R432	E3	R522	E1	R757	*G4	R846	G3	R958	H1	S416	A4
C5	*E1	C160	E1	C403	C4	C747	*G4	C847	G2	D704	*G1	IC410	*G1	L703	*H2	R8	*H1	R170	*D4	R308	*G4	R433	F3	R523	*G1	R758	*G4	R847	H3	R959	H1	S418	B4
C6	*G4	C161	*E2	C404	*C5	C748	G4	C848	*G2	D705	*F3	IC411	*C5	L704	*G3	R9	*E1	R171	*C3	R309	*G4	R434	F3	R601	E1	R759	*G4	R848	H3	R960	H2	S419	B4
C7	G1	C162	E2	C407	*E1	C749	*G4	C849	G2	D706	*G4	IC601	E1	L705	*G3	R10	*E1	R172	C4	R310	H3	R435	*E1	R602	E1	R760	G3	R851	H3	R961	H2	S420	A4
C8	*F1	C163	*E1	C408	*E1	C750	G3	C850	*G2	D707	G3	IC602	*E1	L706	*G3	R11	*A1	R173	E3	R311	*G4	R436	*E2	R603	F1	R761	G3	R852	H3	R962	*H1		
C9	H1	C164	D2	C409	*E1	C751	*H3	C851	G2	D708	*G2	IC603	F2	L707	G3	R12	*B1	R174	C3	R312	H3	R437	*E2	R604	E3	R762	*G4	R853	*F2	R963	*H1	THP1	H1
C10	B1	C165	*D1	C410	E1	C752	G3	C852	*H2	D709	*H4	IC607	*E1	L708	G3	R13	H1	R175	C3	R313	H3	R438	*E1	R605	*E1	R763	*G4	R854	*F2	R964	*G1	THP2	H1
C11	B2	C166	D2	C413	*G1	C753	G4	C853	*H2			IC701	*H2	L709	H3	R14	*H1	R176	C3	R314	G4	R439	C4	R606	F1	R764	G3	R855	H2	R965	*G1	THP3	C1
C12	B1	C167	*D2	C414	*G1	C754	*G4	C854	*G2	E1	G5	IC702	*G3	L710	G4	R15	*B1	R177	C3	R315	G4	R440	*E1	R607	F1	R765	*G4	R856	H3	R966	*G1	THP4	C1
C13	H1	C168	D1	C415	*F1	C755	*G4	C855	F1	E2	E1	IC703	*H3	L711	*G3	R16	*F1	R178	C3	R316	G4	R441	*E1	R608	*E1	R766	*G4	R857	*H2	R967	*E3	THP101	C3
C14	B1	C169	*D2	C416	F1	C756	G3	C856	F1	E4	*E3	IC704	G4	L712	*G3	R17	*F1	R179	E3	R317	*H5	R442	*E1	R609	*E1	R767	*G3	R858	*H2	R969	F2		
C15	B1	C170	D1	C417	*G1	C757	*G4	C857	*E2			IC705	G3	L713	*F3	R18	H1	R180	E3	R318	*H4	R445	*E2	R610	F2	R768	G3	R859	*F1	R970	F3	TP601	E3
C16	*F1	C171	*D2	C418	*F1	C758	G2	C858	G1	FB701	*H2	IC706	*F4	L714	G4	R19	H1	R181	*G5	R319	*H4	R446	*E2	R611	F2	R769	*G4	R860	G3	R972	G3	TP701	H2
C18	*B1	C172	E2	C419	G1	C759	*E3	C859	*F2	FB702	*H2	IC707	*F3	L715	G2	R20	H1	R182	*G5	R320	*G4	R447	*E1	R614	F2	R770	*G4	R861	G3	R973	*G2	TP702	F3
C19	*B2	C173	*E2	C601	*A1	C760	G2	C860	G1	FB703	*H3	IC708	*G2	L716	*G2	R21	*H1	R183	*G5	R321	*G4	R448	*E1	R615	F2	R771	*G4	R862	G3			TP703	F3
C20	*H1	C174	*D1	C602	*E1	C761	*G4	C861	*G3	FB704	*H2	IC709	*G2	L717	*G2	R22	*A2	R184	*G4	R322	*H4	R449	E1	R617	F3	R772	*F3	R863	H3	RB101	D2	TP704	F4
C21	*F1	C175	*C2	C603	*E1	C762	F4	C862	*G3			IC710	*F2	L718	*H4	R23	*A2	R185	*G4	R323	*H4	R450	E1	R618	E2	R773	*F3	R864	*G2	RB102	D2	TP705	F4
C22	*F1	C176	D1	C604	*E1	C763	*G2	C863	G1	IC1	*B1	IC711	*F2	L719	*F2	R33	*A2	R186	D4	R324	*H5	R451	E1	R619	E2	R774	*G2	R865	*G2	RB103	D2	TP709	G3
C23	B1	C177	C1	C605	*E1	C764	*G2	C864	G1	IC2	*F1	IC712	*H4	L720	*F2	R34	*A2	R187	D4	R325	G4	R452	F1	R620	E2	R775	G2	R866	H3	RB104	D2	TP711	F3
C24	*A1	C178	*C2	C606	*E1	C765	F2	C865	*G3	IC3	*H1	IC713	*F3	L724	H2	R35	*A2	R188	C4	R326	G4	R453	F1	R621	E2	R776	*G2	R867	H2	RB105	C3	TP712	F2
C25	H1	C179	*C2	C607	*F3	C766	F2	C866	G1	IC4	*B2	IC715	H2	L725	*G3	R36	*A2	R189	C4	R327	G4	R454	G1	R622	E3	R777	*G4	R868	*F2	RB106	C2	TP713	G3
C26	H1	C180	*D3	C608	*E3	C767	*G1	C867	*F3	IC6	*A2	IC717	*E4	L726	H3	R41	H4	R190	C4	R328	*E5	R455	*G1	R623	E3	R778	F2	R869	*F2	RB107	C2	TP714	H1
C28	*B2	C181	*D3	C609	*F2	C768	*F1	C868	*G3	IC101	C4	IC718	*H2	L727	*E4	R43	*H4	R191	C4	R329	*E4	R456	*G1	R624	E2	R779	F3	R870	G2	RB108	E2		
C29	*H1	C182	*D3	C610	*F2	C769	*F2	C869	*G3	IC102	*E4	IC719	G3	L728	*G3	R44	*H4	R192	*C2	R330	*E5	R457	*G1	R625	E2	R780	*F3	R871	H2	RB109	E3	X301	*H3
C30	J4	C183	*D3	C611	*E2	C770	*F2	C870	*H1	IC103	D1	IC720	*H2	L729	*G3	R48	*A2	R193	*C2	R331	*E5	R458	*G1	R626	E2	R781	G1	R872	G2	RB110	E3	X302	*F5
C31	J4	C184	*D3	C612	*E3	C771	*F2	C871	*G2	IC104	*B4	IC722	H2	L730	H3	R49	*A2	R194	J2	R332	*E5	R459	G1	R627	E2	R782	*G1	R879	G2	RB111	E3	X701	*F2
C33	*A2	C185	*C3	C613	*E2	C772	*F2	C873	*G1	IC105	*D4	IC723	*G2	L733	G2	R50	*A2	R195	*C3	R333	F4	R460	G1	R628	E2	R783	*E3	R880	G2	RB112	C2	X702	G1
C34	*B2	C186	*F4	C614	*F2	C773	*F2	C874	*G1	IC106	E3	IC724	G2	L734	H2	R51	*A2	R196	C3	R334	F4	R461	G1	R629	E3	R784	*G1	R883	*G2	RB113	D2	X703	G1
C35	*H1	C187	*F4	C615	*E2	C774	*G2	C875	*F2	IC107	E3	IC726	F2	L735	*G2	R101	D1	R197	C3	R335	F4	R462	G1	R630	F3	R785	*G1	R885	G2	RB114	D2		
C37	A1	C188	H4	C616	*F3	C775	*G2	C876	*H2	IC108	C3	IC727	*F2	L736	*H2	R102	D1	R198	C3	R337	*G5	R463	*G1	R631	F3	R786	F2	R887	G2	RB115	D2		
C38	A2	C189	*H4	C617	*E3	C776	*G2			IC109	D3	IC728	*G3	L737	F1	R103	*E5	R199	C4	R338	*H5	R464	G1	R633	F3	R787	F4	R888	G2	RB116	C3		
C39	H1	C190	*H1	C618	*E3	C777	F3	CL1	A2	IC110	D1	IC729	H1	L738	*G2	R104	*E4	R200	C3	R339	E4	R465	F1	R700	*H2	R788	*G1	R889	*G2	RB117	C3		
C41	H1	C191	*H2	C619	*F3	C778	*H4	CL2	A2	IC111	*C2	IC730	*H1	L739	G1	R105	*E5	R201	C3	R340	F4	R466	F1	R701	*H2	R789	*G2	R890	G2	RB118	*D3		
C101	*D1	C192	H4	C620	*F2	C779	*H4	CL3	G1	IC112	*F5	IC732	*G3	L740	G1	R106	*E5	R202	C3	R341	E4	R467	F1	R702	*H4	R790	*F3	R891	G2	RB119	*H4		
C102	*D4	C193	H4	C621	*F3	C780	*F2	CL4	F1	IC113	*C2	IC733	*G4	L741	*G3	R107	*E5	R203	*A3	R342	*H5	R468	*G1	R703	*H2	R791	*E3	R893	*G2	RB120	*H4		
C103	*C4	C194	H4	C622	*F2	C781	*F3	CL101	C5	IC114	*C3	IC734	H3	L742	*F3	R108	*D4	R204	*A3	R343	*H5	R469	F1	R704	*H2	R792	*F3	R894	G2	RB121	H1		
C104	C4	C195	H2	C623	*E2	C782	*F3	CL102	D4	IC115	*B2	IC735	*H3	L743	*G1	R109	*E4	R205	C3	R344	E4	R470	F1	R705	G2	R793	G3	R897	G2	RB123	*H2		
C105	*E5	C301	H2	C624	*E2	C783	*F3	CL103	D4	IC116	*A3	IC736	F2			R110	C4	R206	C3	R345	E4	R471	G1	R706	G2	R794	*E3	R900	*G2	RB124	*H1		
C107	*E4	C302	H2	C625	*F3	C784	*F3	CL104	D4	IC117	*B3	IC737	H2	PH1	H4	R111	*E5	R207	C4	R346	*E4	R472	D1	R707	*H2	R795	G2	R902	G2	RB125	*H4		
C108	*D4	C303	*H4	C626	*F2	C785	*F3	CL105	C4	IC118	*C2	IC738	*G2			R112	*E5	R208	*C3	R347	*H3	R473	G1	R708	*H2	R796	G2	R903	G2	RB126	*H5		
C109	C4	C304	G4	C627	*F2	C786	*G2	CL601	E3	IC119	E2	IC739	*F4	PH301	H2	R113	*C4	R209	*C3	R348	H4	R474	F1	R709	*H2	R797	*G1	R904	G2	RB401	*A3		
C110	C4	C305	H3	C628	*F2	C787	*G2	CL602	E3	IC120	*E2	IC740	G1	PH302	H3	R114	*D4	R210	*C3	R349	J3	R475	F1	R710	*H2	R798	*G1	R905	G2	RB402	*B3		
C111	*D5	C306	H3	C629	*F2	C789	*F3			IC121	*C1	IC741	H4			R115	*C4	R211	*C3	R350	J3	R476	G1	R711	H4	R799	*F1	R906	*G2	RB403	*A3		
C112	*D4	C307	*H4	C630	*E3	C790	*H2	CN101	D1	IC122	D1	IC742	*H4	Q1	*H1	R116	*C4	R212	*C2	R351	J3	R477	G1	R712	G2	R800	*F2	R907	*G2	RB404	*A4		
C113	*D5	C308	G4	C631	*E3	C791	*H2	CN102	B1	IC123	C1	IC743	*G4	Q2	*H1	R117	*D4	R213	*D3	R352	*H3	R478	D1	R713	*H2	R801	*G2	R908	*H2	RB405	*B4		
C115	*D4	C309	H4	C632	*F3	C792	*H3	CN103	B2	IC124	*D3	IC744	*H3	Q3	*B1	R118	*D4	R214	*B1	R353	*H3	R479	*G1	R714	*G3	R802	*G2	R909	G2	RB406	*C1		
C117	*E4	C310	*H4	C701	H2	C793	*H2	CN104	P4	IC125	*B2	IC745	*E3	Q4	*B2	R119	D4	R215	*D3	R354	J3	R480	F1	R715	*G3	R803	F2	R910	*H2	RB407	*C1		
C118	*E4	C311	*H4	C702	H2	C796	*H2	CN301	E4	IC126	C3	IC746	*G2	Q5	*H4	R120	*C4	R216	*B1	R355	J3	R481	G1	R716	*H3	R804	F3	R911	*H2	RB420	*F1		
C119	D1	C312	G4	C703	*H2	C798	H2	CN601	A1	IC127	C3	IC747	*F1	Q6	*A2	R121	*D5	R217	*B1	R356	J3	R482	G1	R717	*H2	R805	F3	R912	*G2	RB421	*F1		
C120	D1	C313	H4	C704	*H2	C799	*E4	CN901	J3	IC128	*C3	IC748	*F1	Q101	*D3	R122	*D4	R218	*B1	R357	J3	R483	G1	R718	*H2	R806	F2	R913	*G2	RB422	*F1		
C121	D1	C314	G4	C705	*H2	C801	*G2	CN902	J5	IC129	*D3	IC749	G2	Q102	*C3	R123	*D4	R219	*B1	R358	J3	R484	G1	R719	*H2	R807	*F3	R914	*G2	RB423	*G1		
C122	D1	C315	*G4	C706	*H2	C802	H3			IC130	*D3	IC750	G2	Q301	*E5	R124	*D4	R220	*B1	R359	J3	R485	F1	R720	*G3	R808	*F3	R915	*E2	RB424	*C5		
C123	*D4	C316	*H4	C708	*H2	C803	*E4	D1	*B1	IC131	*F4	IC751	*H1	Q401	*A3	R125	D4	R221	*B1	R360	J3	R486	G1	R721	*G3	R809	*F2	R916	*E2	RB425	*C4		
C124	*F4	C317	*E4	C709	*H2	C804	*G2	D2	*B2	IC132	*C3	IC752	G2	Q402	*A4	R127	*D5	R222	*D3	R361	J3	R487	G1	R722	*G3	R810	*H4	R917	*F2	RB426	*C4		
C125	D1	C318	E4	C710	*H2	C805	*H3	D4	A2	IC133	*D3	IC753	F3	Q403	*A1	R128	C4	R223	*D3	R362	H3	R488	F1	R723	*G3	R811	*H4	R918	*G2	RB427	*C4		
C126	*C4	C319	E4	C711	G4	C806	*H2	D101	*D4	IC134	C4	IC755	*G2	Q404	*A3	R129	C4	R224	*D3	R363	H3	R489	F1	R724	*G3	R812	*H4	R919	*G2	RB428	*C4		
C127	E3	C320	F4	C712	*G3	C807	*H2	D102	*D4	IC135	*D3	IC756	G2	Q405	*A1	R130	*D4	R225	*D3	R364	F4	R490	*G1	R725	*G3	R813	*H4	R920	G1	RB429	*C4		
C128	*E5	C321	E4	C713	*H3	C808	*G3	D103	*D4	IC136	C3	IC757	*G2	Q406	*A3	R131	*C4	R226	*D3	R365	F4	R491	*G1	R726	*G3	R814	*F3	R921	G1	RB430	*D1		
C129	*C4	C323	F4	C715	*H2	C809	H2	D104	*D5	IC137	*H4	IC758	*G1	Q407	G1	R132	*C4	R227	*D3	R366	F4	R492	F1	R727	*H4	R815	*F3	R922	G1	RB431	*D1		
C130	E4	C324	F4	C716	*G3	C810	*G2	D105	*F4	IC138	H1	IC759	*H2	Q408	G1	R133	*C4	R228	*D3	R401	*A4	R493	F1	R728	*H3	R816	*F3	R923	G1	RB701	*F3		
C131	*D4	C325	F4	C717	*G3	C811	*G3	D106	*E5	IC139	*H2	IC760	*H2	Q409	G1	R134	*D4	R229	*D3	R402	*A4	R494	F1	R729	G3	R817	*G4	R924	*F2	RB703	F3		
C132	*D3	C326	E4	C718	*G3	C812	*G3	D107	*D3	IC140	H4	IC761	*H2	Q410	G1	R135	C4	R230	*D3	R403	*A4	R495	F1	R730	G3	R818	*F3	R925	*F2	RB709	*E3		
C133	*D3	C327	*E4	C719	*G3	C813	H3	D401	*C4	IC141	*G5	IC762	*H2	Q411	G1	R136	C4	R231	*D3	R404	*A5	R496	G1	R731	*G3	R819	*F4	R926	*F2	RB710	*E4		
C134	*D3	C328	*H3	C720	G3	C814	G3	D402	*B4	IC142	*C4			Q412	G1	R137	*D4	R232	*D3	R405	C4	R497	G1	R732	*G3	R820	*F4	R927	G2	RB714	F2		
C135	E3	C329	*H3	C721	H3	C815	G3	D403	*B4	IC143	H4	L1	*F4	Q413	G1	R139	*F4	R233	*D3	R406	*A3	R498	G1	R733	G3	R821	*F3	R928	G2	RB715	F2		
C136	E3	C330	H4	C722	G3	C816	H3	D404	*B4	IC144	*D4	L101	C1	Q414	D1	R140	*C4	R234	*D3	R407	*A4	R499	*F1	R734	G3	R822	*G2	R929	*H2	RB716	F2		
C137	E3	C331	*H3	C723	G3	C817	H3	D405	*B4	IC145	*E4	L102	*D4	Q415	E1	R142	*D4	R235	*C3	R408	*A1	R500	G1	R735	G3	R823	*G2	R930	*H2	RB717	F2		
C138	*D3	C332	H4	C724	*G3	C818	*F1	D406	*B4	IC146	*C2	L103	*D4	Q416	D1	R144	*E4	R236	*D3	R409	*A3	R501	F1	R736	G3	R824	*G2	R931	*H2				
C139	*C2	C333	*H3	C725	G3	C819	*H2	D407	*B4	IC147	H4	L104	*F4	Q417	E1	R147	*D5	R237	*F4	R410	*A3	R502	*F1	R737	G3	R825	*F4	R932	G1	RV701	F2		
C140	*G5	C334	H4	C726	G3	C820	H2	D408	*B4	IC148	H4	L105	*E5	Q418	E1	R148	*E4	R238	*F4	R411	*A4	R503	*F1	R738	H3	R826	*G2	R933	G2	RV702	G1		
C141	*G5	C335	*H3	C727	H3	C821	G3	D409	A3	IC149	*D4	L106	*C4	Q419	E1	R150	*F4	R239	*F4	R412	*A1	R504	*F1	R739	*H3	R827	H2	R934	*G3				
C142	*C2	C336	*H3	C728	G3	C822	*G2	D410	A4	IC150	H2	L107	*D4	Q701	*G3	R152	E3	R240	H4	R413	*A3	R505	*F1	R740	*H3	R828	*H3	R935	*G3	S101	C4		
C143	*D3	C337	*H3	C729	*H3	C823	H3	D411	A2	IC151	F4	L108	E2	Q702	*G3	R153	E3	R241	H4	R414	*A3	R506	*F1	R741	*H3	R829	*G3	R936	G1	S102	C4		
C144	*C3	C338	*H3	C730	*G4	C827	*F1	D412	A3	IC301	G4	L109	E2	Q703	G3	R154	E3	R242	J4	R415	*A4	R507	*F1	R742	G4	R830	*H2	R937	G1	S103	C4		
C145	*C3	C339	J3	C731	H3	C829	G2	D416	*C4	IC302	*E4	L110	*D1	Q704	*G3	R155	*E4	R243	H4	R416	*A2	R508	*F1	R743	G4	R831	*H3	R938	*G3	S104	C4		
C146	*C4	C340	J3	C732	*H3	C830	G2	D417	*B4	IC303	E4	L111	*D3	Q705	*G4	R156	*E4	R244	E3	R417	*A3	R509	*G1	R744	*G3	R832	*H2	R939	*G3	S401	A4		
C147	*C2	C341	J3	C733	*G4	C831	G2	D418	*B4	IC304	E4	L112	*B1	Q706	*H3	R157	E4	R245	E3	R418	*A2	R510	G1	R745	*G3	R833	*H3	R940	*G3	S402	A4		
C148	*C4	C342	*F5	C734	G4	C833	*G2	D419	*B4	IC305	H3	L113	*D3	Q707	G3	R158	*E4	R246	F4	R419	*A3	R511	G1	R746	*H3	R834	*H2	R941	H1	S403	A3		
C149	*D4	C343	*F5	C735	G4	C834	G2	D420	*B4	IC306	*E4	L114	*A2	Q708	G3	R159	D1	R247	F4	R420	*A1	R512	*G1	R747	*F3	R835	H2	R942	H1	S404	A3		
C150	*D4	C344	F4	C736	G4	C835	G2	D421	*B4	IC307	*G4	L301	*G4	Q709	G1	R160	*E4	R248	*E4	R421	*A3	R513	*G1	R748	G4	R836	H2	R943	*G3	S405	B3		
C151	*A3	C350	*H3	C738	G3	C836	G2	D422	*B4	IC308	*G4	L302	*G4	Q710	G1	R161	*D4	R249	*E4	R422	*A1	R514	G1	R749	*G2	R837	H2	R944	H1	S406	B4		
C152	C3	C351	*H3	C739	*F3	C837	G2	D423	*B4	IC309	F4	L303	E4			R162	*D4	R250	*C2	R423	*A3	R515	D1	R750	*G3	R839	*H2	R945	H1	S407	B4		
C153	*C3	C352	*H1	C740	G3	C840	G2	D425	*B4	IC401	C4	L304	*H3	R1	*H1	R163	*C4	R301	*G4	R424	F2	R516	D1	R751	*F3	R840	H3	R946	*G3	S408	B4		

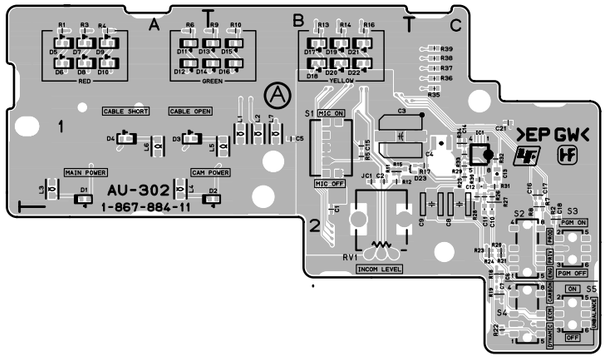

AU-302 -A SIDE-
SUFFIX: -11, 12

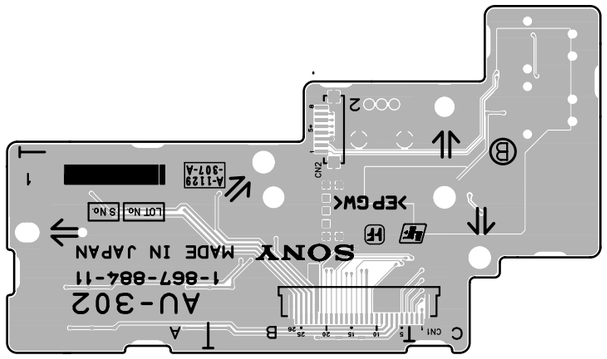

AU-302 -B SIDE-
SUFFIX: -11, 12

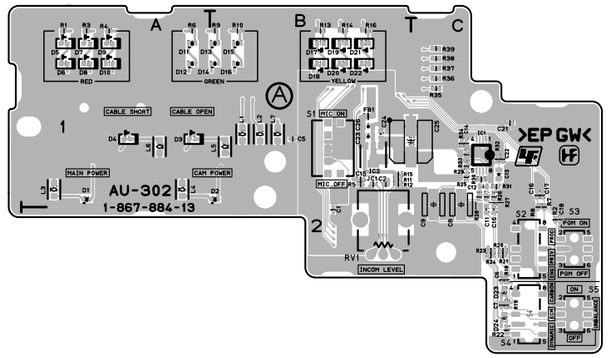

AU-302 -A SIDE-
SUFFIX: -13

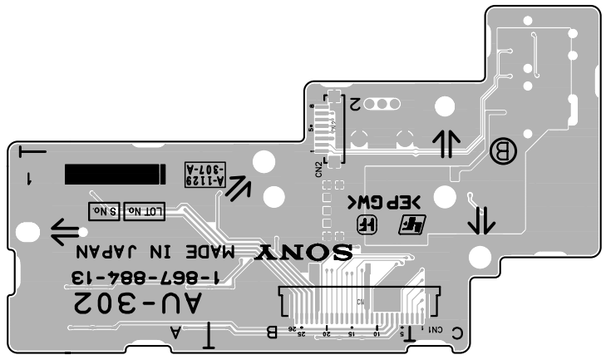

AU-302 -B SIDE-
SUFFIX: -13

AU-302 (1-867-884-11, 12)
---

*:B SIDE

C1	B2	D10	A1	R6	A1	R38	C1
C2	B1	D11	A1	R7	C2	R39	C1
C3	B1	D12	A1	R8	C2		
C4	C1	D13	B1	R9	B1	RV1	B2
C5	B1	D14	B1	R10	B1		
C6	C2	D15	B1	R11	B1	S1	B1
C7	C2	D16	B1	R12	B1	S2	C2
C8	C1	D17	B1	R13	B1	S3	C2
C9	C1	D18	B1	R14	B1	S4	C2
C10	C2	D19	B1	R15	B1	S5	C2
C11	C2	D20	B1	R16	B1		
C12	C1	D21	B1	R17	C1		
C13	C1	D22	B1	R18	C2		
C14	C1	D23	C1	R19	C2		
C15	B1			R20	C2		
C16	C1	IC1	C1	R21	C2		
C17	C1			R22	C2		
C18	C2	JC1	B1	R23	C2		
C21	C1			R24	C2		
		L1	B1	R25	C1		
CN1	*B1	L2	B1	R26	C1		
CN2	*B2	L3	A1	R27	C1		
		L4	A1	R28	C1		
D1	A1	L5	B1	R29	C1		
D2	B1	L6	A1	R30	C1		
D3	A1	L7	B1	R31	C1		
D4	A1			R32	C1		
D5	A1	R1	A1	R33	C1		
D6	A1	R2	C2	R34	C1		
D7	A1	R3	A1	R35	C1		
D8	A1	R4	A1	R36	C1		
D9	A1	R5	B1	R37	C1		

AU-302 (1-867-884-13)
---

*:B SIDE

C1	B2	D7	A1	L7	B1	R32	C1
C2	B1	D8	A1			R33	C1
C5	B1	D9	A1	R1	A1	R34	C1
C6	C2	D10	A1	R2	C2	R35	C1
C7	C2	D11	A1	R3	A1	R36	C1
C8	C1	D12	A1	R4	A1	R37	C1
C9	C1	D13	B1	R5	B1	R38	C1
C10	C2	D14	B1	R6	A1	R39	C1
C11	C2	D15	B1	R7	C2		
C12	C1	D16	B1	R8	C2	RV1	B2
C13	C1	D17	B1	R9	B1		
C14	C1	D18	B1	R10	B1	S1	B1
C15	B1	D19	B1	R11	B1	S2	C2
C16	C1	D20	B1	R12	B1	S3	C2
C17	C1	D21	B1	R13	B1	S4	C2
C18	C2	D22	B1	R14	B1	S5	C2
C21	C1	D23	C2	R15	B1		
C22	C1	D24	C2	R16	B1		
C23	B1			R18	C2		
C24	B1	FB1	B1	R19	C2		
C25	B1			R20	C2		
C26	B1	IC1	C1	R21	C2		
		IC2	B1	R22	C2		
CN1	*B1			R23	C2		
CN2	*B2	JC1	B1	R24	C2		
				R25	C1		
D1	A1	L1	B1	R26	C1		
D2	B1	L2	B1	R27	C1		
D3	A1	L3	A1	R28	C1		
D4	A1	L4	A1	R29	C1		
D5	A1	L5	B1	R30	C1		
D6	A1	L6	A1	R31	C1		

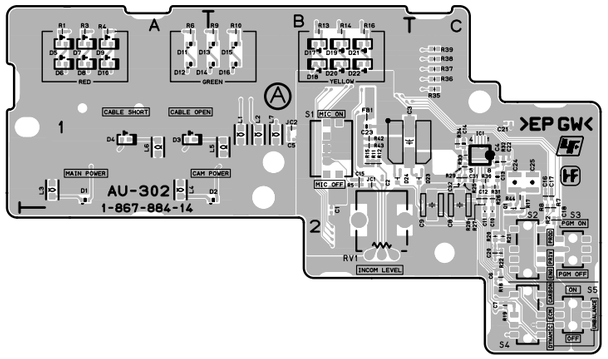

AU-302 -A SIDE-
SUFFIX: -14, 31

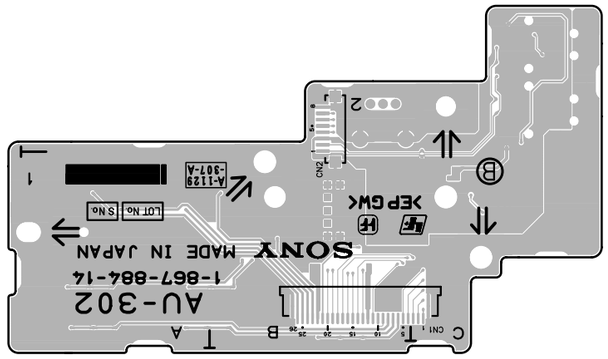

AU-302 -B SIDE-
SUFFIX: -14, 31

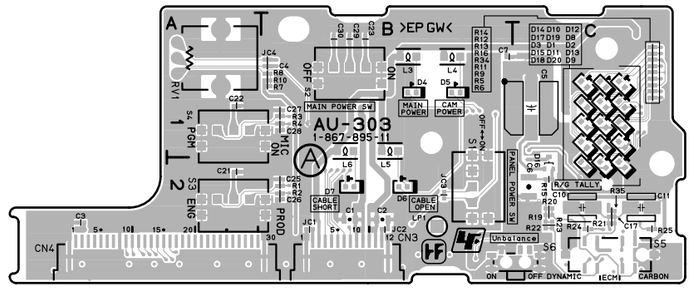

AU-303 -A SIDE-
SUFFIX: -11

AU-303 -B SIDE-
SUFFIX: -11

AU-302 (1-867-884-14, 31)							
*:B SIDE							
C1	B2	D3	A1	L3	A1	R27	C1
C2	B1	D4	A1	L4	A1	R28	C1
C3	B1	D5	A1	L5	B1	R29	C1
C4	C1	D6	A1	L6	A1	R30	C1
C5	B1	D7	A1	L7	B1	R31	C1
C6	C2	D8	A1			R32	C1
C7	C2	D9	A1	Q1	C2	R33	C1
C8	C1	D10	A1			R34	C1
C9	C1	D11	A1	R1	A1	R35	C1
C10	C2	D12	A1	R2	C2	R36	C1
C11	C2	D13	B1	R3	A1	R37	C1
C12	C1	D14	B1	R4	A1	R38	C1
C13	C1	D15	B1	R5	B1	R39	C1
C14	C1	D16	B1	R6	A1	R42	B1
C15	B1	D17	B1	R7	C2	R43	B1
C16	C1	D18	B1	R8	C2	R44	C1
C17	C1	D19	B1	R9	B1		
C18	C2	D20	B1	R10	B1	RV1	B2
C20	C2	D21	B1	R11	B1		
C21	C1	D22	B1	R12	B1	S1	B1
C22	C1	D23	C1	R13	B1	S2	C2
C23	B1	D24	B1	R14	B1	S3	C2
C24	C1			R15	B1	S4	C2
C25	C1	FB1	B1	R16	B1	S5	C2
C31	C1			R17	C2		
C32	C1	IC1	C1	R18	C2		
				R19	C2		
CN1	*B1	JC1	B1	R20	C2		
CN2	*B2	JC2	B1	R21	C2		
				R22	C2		
D1	A1	L1	B1	R25	C1		
D2	B1	L2	B1	R26	C1		

AU-303 (1-867-895-11)							
*:B SIDE							
C1	B2	D1	C1	L5	B1	R27	*C2
C2	B2	D2	C1	L6	B1	R28	*C2
C3	A2	D3	C1	L7	*C1	R29	*C2
C4	B1	D4	B1			R30	*C2
C5	C1	D5	B1	LP1	B2	R31	*C2
C6	C2	D6	B2			R32	*C2
C7	B1	D7	B2	R1	B2	R33	*C2
C8	*C2	D8	C1	R2	B2	R34	C1
C9	*C2	D9	C2	R3	B1	R35	C2
C10	C2	D10	C1	R4	B1		
C11	C2	D11	C1	R5	C1	RV1	A1
C12	*C2	D12	C1	R6	C1		
C13	*C2	D13	C1	R7	B1	S1	B2
C14	*C2	D14	C1	R8	B1	S2	B1
C15	*C2	D15	C1	R9	C1	S3	A2
C16	*C2	D16	C2	R10	B1	S4	A1
C17	C2	D17	C1	R11	C1	S5	C2
C21	A2	D18	C2	R12	C1	S6	C2
C22	A1	D19	C1	R13	C1		
C23	B1	D20	C2	R14	C1		
C24	*C2			R15	C2		
C25	B2	IC1	*C2	R16	C1		
C26	B2			R17	*C2		
C27	B1	JC1	B2	R18	*C2		
C28	B1	JC2	B2	R19	C2		
C29	B1	JC3	B2	R20	C2		
C30	B1	JC4	B1	R21	C2		
				R22	C2		
CN1	*C1	L1	*C1	R23	C2		
CN2	*A2	L2	*C1	R24	C2		
CN3	B2	L3	B1	R25	C2		
CN4	A2	L4	B1	R26	*C2		

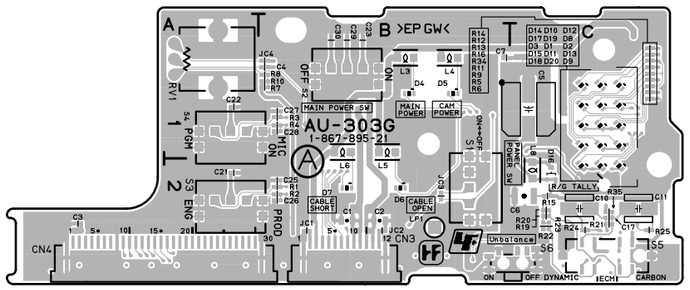

AU-303G -A SIDE-
SUFFIX: -21

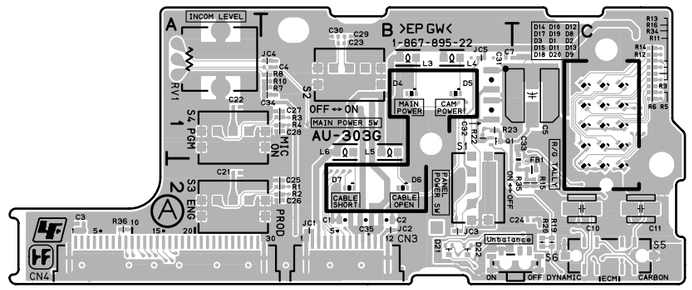

AU-303G -A SIDE-
SUFFIX: -22, 31

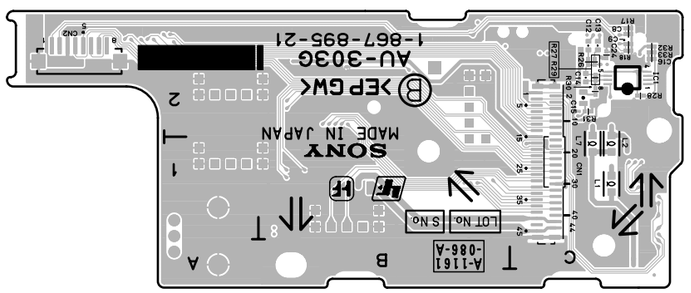

AU-303G -B SIDE-
SUFFIX: -21

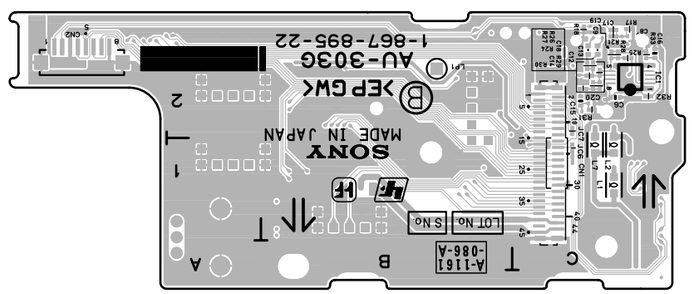

AU-303G -B SIDE-
SUFFIX: -22, 31

```
----------------------
AU-303G (1-867-895-21)
----------------------

*:B SIDE

C1      B2    D1      C1    L5      B1    R26    *C2
C2      B2    D2      C1    L6      B1    R27    *C2
C3      A2    D3      C1    L7    *C1     R28    *C2
C4      B1    D4      B1    L8      C2    R29    *C2
C5      C1    D5      B1                  R30    *C2
C6      C2    D6      B2    LP1     B2    R31    *C2
C7      B1    D7      B2                  R32    *C2
C8    *C2     D8      C1    R1      B2    R33    *C2
C9    *C2     D9      C2    R2      B2    R34     C1
C10     C2    D10     C1    R3      B1    R35     C2
C11     C2    D11     C1    R4      B1
C12   *C2     D12     C1    R5      C1    RV1     A1
C13   *C2     D13     C1    R6      C1
C14   *C2     D14     C1    R7      B1    S1      B2
C15   *C2     D15     C1    R8      B1    S2      B1
C16   *C2     D16     C2    R9      C1    S3      A2
C17     C2    D17     C1    R10     B1    S4      A1
C21     A2    D18     C2    R11     C1    S5      C2
C22     A1    D19     C1    R12     C1    S6      C2
C23     B1    D20     C2    R13     C1
C24   *C2                   R14     C1
C25     B2    IC1   *C2     R15     C2
C26     B2                  R16     C1
C27     B1    JC1     B2    R17   *C2
C28     B1    JC2     B2    R18   *C2
C29     B1    JC3     B2    R19     C2
C30     B1    JC4     B1    R20     C2
                            R21     C2
CN1   *C1     L1    *C1     R22     C2
CN2   *A2     L2    *C1     R23     C2
CN3     B2    L3      B1    R24     C2
CN4     A2    L4      B1    R25     C2
```

```
-------------------------
AU-303G (1-867-895-22, 31)
-------------------------

*:B SIDE

C1      B2    C35     B2    JC2     B2    R16     C1
C2      B2                  JC3     B2    R17   *C2
C3      A2    CN1   *C1     JC4     B1    R18   *C2
C4      B1    CN2   *A2     JC5     B1    R19     C2
C5      C1    CN3     B2    JC6   *C1     R20     C2
C6    *C2     CN4     A2    JC7   *C2     R21   *C2
C7      B1                                R22     B1
C8    *C2     D1      C1    L1    *C1     R23     B1
C9    *C2     D2      C1    L2    *C1     R24   *C2
C10     C2    D3      C1    L3      B1    R25   *C2
C11     C2    D4      B1    L4      B1    R26   *C2
C12   *C2     D5      B1    L5      B1    R27   *C2
C13   *C2     D6      B2    L6      B1    R28   *C2
C14   *C2     D7      B2    L7    *C1     R29   *C2
C15   *C2     D8      C1                  R30   *C2
C16   *C2     D9      C2    LP1   *B2     R31   *C2
C17   *C2     D10     C1                  R32   *C2
C18   *C2     D11     C1    Q1      B1    R33   *C2
C19   *C2     D12     C1                  R34     C1
C20   *C2     D13     C1    R1      B2    R35     C2
C21     A2    D14     C1    R2      B2    R36     A2
C22     A1    D15     C1    R3      B1
C23     B1    D17     C1    R4      B1    RV1     A1
C24     C2    D18     C2    R5      C1
C25     B2    D19     C1    R6      C1    S1      B2
C26     B2    D20     C2    R7      B1    S2      B1
C27     B1    D21     B2    R8      B1    S3      A2
C28     B1    D22     B2    R9      C1    S4      A1
C29     B1                  R10     B1    S5      C2
C30     B1    FB1     C2    R11     C1    S6      C2
C31     B1                  R12     C1
C32     B1    IC1   *C2     R13     C1
C33     C2                  R14     C1
C34     B1    JC1     B2    R15     C2
```

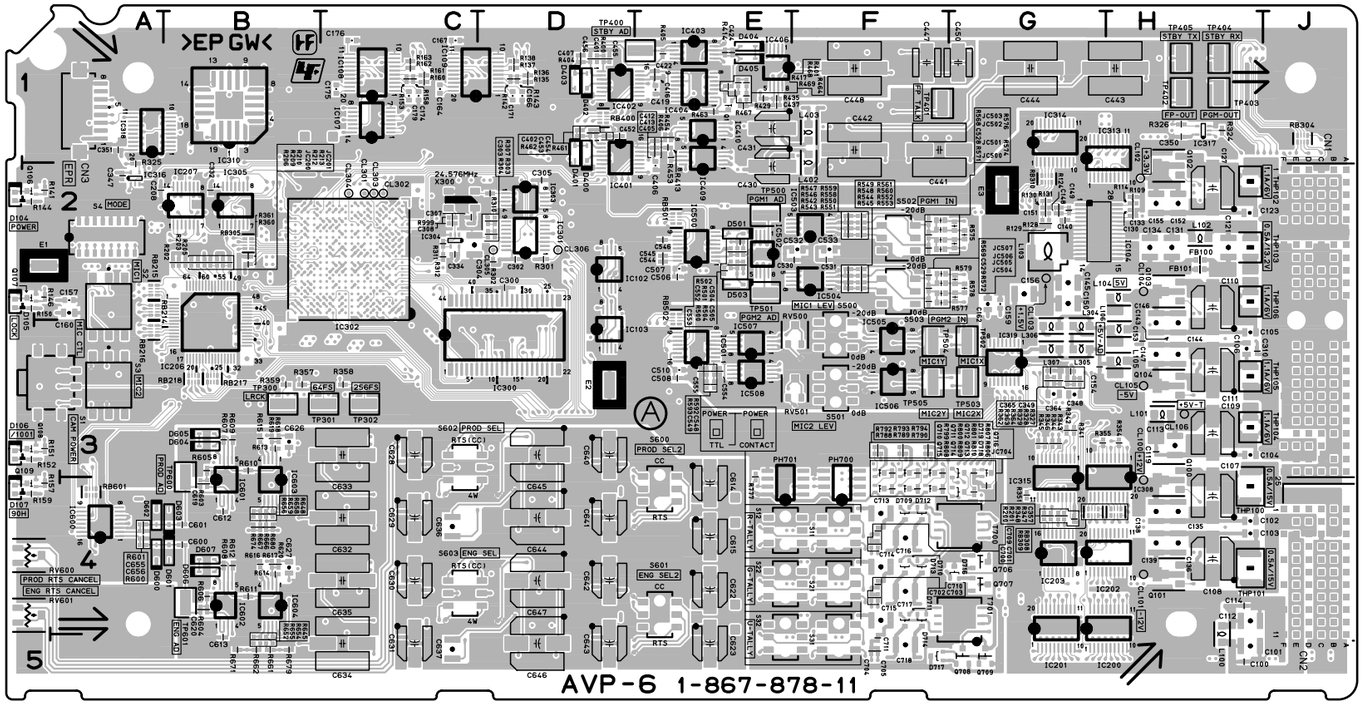

AVP-6 -A SIDE-
SUFFIX: -11, 12, 31

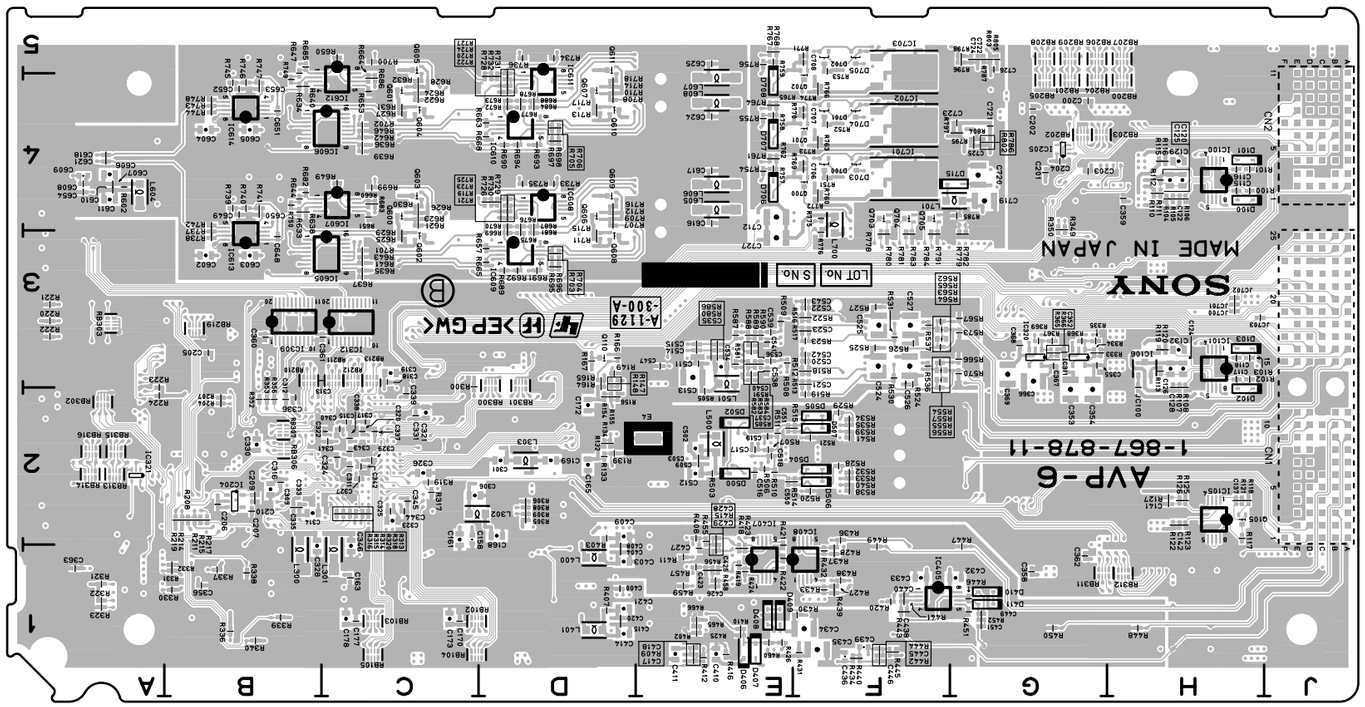

AVP-6 -B SIDE-
SUFFIX: -11, 12, 31

AVP-6 (1-867-878-11, 12, 31)
---

*:B SIDE

C100	H5	C210	*B2	C419	E1	C554	E3	CL104	H2	IC201	G5	L301	*C1	R124	G2	R325	A2	R445	*F1	R565	*F3	R661	B5	R751	*F4	RB304	J1
C101	H5	C300	D2	C420	*D1	C555	E3	CL105	H3	IC202	G4	L302	*C2	R125	*H2	R326	H1	R446	*G1	R566	*G3	R662	B5	R752	*F4	RB305	B2
C102	H4	C301	*D2	C421	*D1	C600	B4	CL106	H3	IC203	G4	L303	*D2	R126	*H2	R327	G3	R447	*G1	R567	*G3	R663	*D4	R753	*F5	RB306	*B2
C103	H4	C302	D2	C422	E1	C601	B4	CL301	C2	IC204	*B2	L304	G3	R127	*H2	R328	G3	R448	*H1	R568	F2	R664	*C4	R754	*E4	RB307	*B2
C104	H3	C303	D2	C423	*E1	C602	*B3	CL302	C2	IC205	*G4	L305	G3	R128	G2	R329	G3	R449	*F1	R569	F2	R665	*D3	R755	*E4	RB308	H4
C105	H3	C304	C2	C424	E1	C603	*B3	CL303	C2	IC206	B3	L306	G3	R129	G2	R330	*B1	R450	*G1	R570	*G3	R666	B4	R756	*E5	RB309	G4
C106	H3	C305	D2	C425	*E1	C604	*B4	CL304	C2	IC207	B2	L307	G3	R130	G2	R331	*B1	R451	*G1	R571	F2	R667	B4	R757	*E4	RB310	G2
C107	H4	C306	*C2	C426	*E1	C605	*B4	CL305	D2	IC300	C3	L400	*D1	R131	G2	R332	*B1	R452	*G1	R572	F2	R668	*D4	R758	*E4	RB311	*G1
C108	H4	C307	C2	C427	*E1	C606	*A4	CL306	D2	IC301	D2	L401	*D1	R132	*D2	R333	*G3	R453	E1	R573	*G3	R669	*D3	R759	*E5	RB312	*H1
C109	H3	C308	C2	C428	*E2	C607	*A4			IC302	C2	L402	F2	R133	*D2	R334	*G3	R454	E1	R574	G2	R670	*D4	R760	*F4	RB313	*A2
C110	H2	C309	*B2	C429	*E1	C608	*A4	CN1	J3	IC303	D2	L403	F1	R134	*D2	R335	*G3	R455	*E2	R575	G2	R671	B5	R761	*E4	RB314	*A2
C111	H3	C310	H3	C430	E2	C609	*A4	CN2	J5	IC304	C2	L500	*E2	R135	D1	R336	*B1	R456	*E1	R576	G2	R672	*D4	R762	*E4	RB315	*A2
C112	H4	C311	*C2	C431	E1	C610	*A4	CN3	A1	IC305	B2	L501	*E3	R136	D1	R337	*B1	R457	*E1	R577	G2	R673	*D4	R763	*F4	RB316	*A2
C113	H3	C312	*B2	C432	*G1	C611	*A4			IC308	H3	L604	*A4	R137	D1	R338	*B1	R458	*E1	R578	G2	R674	B4	R764	*E4	RB400	D1
C114	H4	C313	*B3	C433	*F1	C612	B4	D100	*H4	IC309	*B3	L605	*E4	R138	D1	R339	*B1	R459	*E1	R579	G2	R675	*D3	R765	*E4	RB501	E2
C115	*H4	C314	*B2	C434	*F1	C613	B5	D101	*H4	IC310	B1	L606	*E4	R139	*D2	R340	*B1	R460	*E1	R580	*E3	R676	*D4	R766	*F4	RB502	E2
C116	*H4	C315	*C2	C435	*F1	C614	E4	D102	*H2	IC311	*G3	L607	*E4	R141	A2	R341	G3	R461	D1	R581	*E3	R677	*D4	R767	*E5	RB601	A4
C117	*H3	C316	*B2	C436	*F1	C615	E4	D103	*H3	IC312	*C3	L608	*E4	R142	D1	R342	G3	R462	D1	R582	*E3	R678	*D4	R768	*E5		
C118	*H3	C317	*C2	C437	E1	C616	*E4	D104	A2	IC313	G2	L700	*F4	R143	D1	R343	G3	R463	E1	R583	*E3	R679	B5	R769	*F4	RV500	F3
C119	H3	C318	*C3	C438	*F1	C617	*E4	D105	A2	IC314	G1	L701	*G4	R144	A2	R344	G3	R464	E1	R584	*E3	R680	B4	R770	*F4	RV501	F3
C120	*H4	C319	*C3	C439	*F1	C618	*A4	D106	A3	IC315	G3			R146	A2	R345	G3	R465	*E1	R585	*E3	R681	*D3	R771	*F5	RV600	A4
C121	H2	C320	*C2	C440	*F1	C619	B4	D107	A4	IC316	A2	PH700	F4	R147	*D3	R346	G3	R466	*E1	R586	*E3	R682	*B4	R772	*F4	RV601	A4
C122	*H4	C321	*C2	C441	F1	C620	B4	D400	D1	IC317	H1	PH701	E4	R148	*D3	R347	G4	R467	E1	R587	*E3	R683	*C4	R773	*F4		
C123	H2	C322	*C2	C442	F1	C621	*A4	D401	D1	IC318	B1			R149	*D3	R348	G4	R468	E1	R588	*E3	R684	*D4	R774	*F4	S1	A3
C124	*H3	C323	*C2	C443	H1	C622	E4	D402	D1	IC319	G3	Q1	E1	R150	A2	R349	*G4	R469	E1	R589	*E3	R685	*B5	R775	*F4	S2	A2
C125	*H4	C324	*C2	C444	G1	C623	E5	D403	D1	IC320	*G3	Q100	H4	R151	A3	R350	*G4	R500	E2	R590	*E3	R686	*C4	R776	*F3	S3	A3
C126	*H3	C325	*C2	C445	*F1	C624	*E4	D404	E1	IC321	*A2	Q101	H4	R152	A3	R351	G4	R501	E2	R591	*E3	R687	*D4	R777	E4	S4	A2
C127	H2	C326	*C2	C446	*F1	C625	*E5	D405	E1	IC401	D1	Q102	H2	R153	C1	R352	*B2	R502	E2	R592	E3	R688	*D4	R778	*F3	S11	F4
C128	*H3	C327	*C2	C447	F1	C626	B3	D406	*E1	IC402	D1	Q103	H2	R154	*D2	R353	*B2	R503	*E2	R593	E3	R689	*D3	R779	*G3	S12	E4
C129	*H4	C328	*B1	C448	F1	C627	B4	D407	*E1	IC403	E1	Q104	H3	R155	*D2	R354	H3	R504	E2	R600	A4	R690	*D4	R780	*F3	S21	F4
C130	H2	C329	*C2	C449	*G1	C628	C3	D408	*E1	IC404	E1	Q105	*H2	R156	*D2	R355	G3	R505	*E2	R601	A4	R691	*D3	R781	*F3	S22	E4
C131	H2	C330	*B2	C450	G1	C629	C4	D409	*E1	IC405	*F1	Q106	A2	R157	A4	R356	*B2	R506	*E2	R602	*A4	R692	*D3	R782	*G3	S31	F5
C132	*H3	C331	*C2	C451	*G1	C630	C4	D410	*G1	IC406	E1	Q107	A2	R158	C1	R357	B3	R507	*E2	R603	B4	R693	*D4	R783	*F3	S32	E5
C133	H2	C332	B2	C452	D1	C631	C5	D411	*G1	IC407	*E1	Q108	A3	R159	A4	R358	C3	R508	*E3	R604	B4	R694	*D4	R784	*F3	S500	F3
C134	H2	C333	*B2	C453	D1	C632	C4	D500	*E2	IC408	*F1	Q109	A4	R160	C1	R359	B3	R509	*E3	R605	B3	R695	*D3	R785	*G4	S501	F3
C135	H4	C334	C2	C454	D1	C633	C3	D501	E2	IC409	E2	Q110	*D3	R161	C1	R360	B2	R510	*E2	R606	B4	R696	*D3	R786	*G4	S502	F2
C136	H4	C335	*B2	C455	D1	C634	C5	D502	*E2	IC410	E1	Q600	*C4	R162	C1	R361	B2	R511	*E2	R607	B3	R697	*D4	R787	*G5	S503	F2
C137	*H2	C336	*B2	C456	D1	C635	C4	D503	E2	IC500	E2	Q601	*C4	R163	C1	R362	G3	R512	*F3	R608	B4	R698	*D4	R788	F3	S600	E4
C138	H4	C337	*C2	C502	*E2	C636	C4	D504	*F2	IC501	E3	Q602	*C3	R164	*D3	R363	G3	R513	*F3	R609	B3	R699	*C4	R789	F3	S601	E4
C139	H4	C338	*C2	C503	*E2	C637	C5	D505	*F2	IC502	E2	Q603	*C4	R165	*D3	R364	G3	R514	*F2	R610	B3	R700	*C5	R790	F3	S602	C3
C140	G2	C339	*C2	C504	E2	C640	D3	D506	*F2	IC503	F2	Q604	*C4	R166	*D3	R365	*G3	R515	*F2	R611	B4	R701	*C3	R791	*F3	S603	C4
C141	*H2	C340	*C2	C505	E2	C641	D4	D507	*F2	IC504	F2	Q605	*C5	R167	*D3	R366	*G3	R516	*F3	R612	B4	R702	*C4	R792	F3		
C142	*H2	C341	*C2	C506	E2	C642	D4	D600	A4	IC505	F3	Q606	*D4	R200	G4	R367	*G3	R517	*F3	R613	B3	R703	*D3	R793	F3	T700	G4
C143	H3	C342	*C2	C507	E2	C643	D5	D601	B4	IC506	F3	Q607	*D4	R201	G4	R368	*G3	R518	*F3	R614	B4	R704	*D3	R794	F3	T701	G4
C144	H3	C343	*C2	C508	E3	C644	D4	D602	A4	IC507	E3	Q608	*D3	R202	B2	R369	*G3	R519	*F2	R615	B3	R705	*D4	R795	*G4		
C145	G2	C344	*C2	C509	*E2	C645	D3	D603	B4	IC508	E3	Q609	*D4	R203	B2	R400	D1	R520	*F2	R616	B4	R706	*D4	R796	*G5	THP100	H4
C146	H3	C345	*C2	C510	E3	C646	D5	D604	B3	IC600	A4	Q610	*D4	R204	*B2	R401	E1	R521	*F2	R617	B4	R707	*D4	R797	*G4	THP101	H4
C147	H3	C346	*C1	C511	*E3	C647	D4	D605	B3	IC601	B4	Q611	*D5	R205	B2	R402	*E1	R522	*F3	R618	B3	R708	*D4	R798	*G5	THP102	H2
C148	G2	C347	A2	C512	*E2	C648	*B3	D606	B4	IC602	B4	Q700	*F4	R206	B2	R403	*D2	R523	*F3	R619	B3	R709	*D4	R799	F3	THP103	H2
C149	G2	C348	G3	C513	*E3	C649	*B4	D607	B4	IC603	B3	Q701	*F4	R207	*B2	R404	D1	R524	*F3	R620	B4	R710	*D4	R800	F3	THP104	H3
C150	G2	C349	G3	C514	*E3	C650	*B4	D700	*F4	IC604	B4	Q702	*F4	R208	*B2	R405	E1	R525	*F3	R621	*C4	R711	*D3	R801	F3	THP105	H3
C151	G2	C350	H1	C515	*E3	C651	*B4	D701	*F4	IC605	*B3	Q703	*F4	R209	B2	R406	E1	R526	*F3	R622	*C4	R712	*D4	R802	*G4	THP106	H2
C152	H2	C351	A1	C516	*E2	C652	*B4	D702	*F5	IC606	*B4	Q704	*F4	R210	B2	R407	*D1	R527	*F3	R623	*C4	R713	*D4	R803	*G5		
C153	H3	C352	*G3	C517	*E2	C653	*B4	D703	*F4	IC607	*B4	Q705	*F4	R211	*B2	R408	*E2	R528	*F2	R624	*C4	R714	*D4	R804	*G4	TP300	B3
C154	G3	C353	*G2	C518	*E2	C654	*A4	D704	*F4	IC608	*D4	Q706	G4	R212	B2	R409	*E1	R529	*F2	R625	*C3	R715	*D3	R805	*G5	TP301	C3
C155	H2	C354	*G2	C519	*E2	C655	A4	D705	*F5	IC609	*D3	Q707	G4	R213	B2	R410	*E1	R530	*F3	R626	*C4	R716	*D4	R806	G4	TP302	C3
C156	G2	C355	*G3	C520	*F3	C656	A4	D706	*E4	IC610	*D4	Q708	G5	R214	*B2	R411	*E1	R531	*F3	R627	*C4	R717	*D4	R807	G3	TP400	E1
C157	A2	C356	*B1	C521	*F3	C700	F4	D707	*E4	IC611	*D4	Q709	G5	R215	*B2	R412	*E1	R532	*F2	R628	*C4	R718	*D4	R808	F4	TP401	F1
C158	*C2	C357	G4	C522	*F3	C701	F4	D708	*E4	IC612	*B5	Q710	F3	R217	*B2	R413	E1	R533	*F2	R629	*C3	R719	*D4	R809	F4	TP402	H1
C159	G2	C358	*G1	C523	*F3	C702	F4	D709	F4	IC613	*B3	Q711	F3	R219	*B2	R414	E1	R534	*F2	R630	*C4	R720	*D4	R810	F4	TP403	H1
C160	A2	C359	*H4	C524	*F3	C703	F4	D710	F4	IC614	*B4	Q712	F3	R220	*A3	R415	*E2	R535	*F2	R631	*C4	R721	*D4	R999	C2	TP404	H1
C161	*C2	C360	*B3	C525	*F3	C704	F5	D711	F4	IC701	*F4	Q713	F4	R221	*A3	R416	*E1	R536	*F3	R632	*C4	R722	*D4			TP405	H1
C162	G2	C361	*C3	C526	*F3	C705	F5	D712	F4	IC702	*F4	Q714	F4	R222	*A3	R417	E1	R537	*F3	R633	*B4	R723	*D4	RB102	*C1	TP500	E2
C163	*C1	C362	*G1	C527	*F3	C706	*F4	D713	F4	IC703	*F5	Q715	F4	R223	*A3	R418	*E1	R538	*F2	R634	*B4	R724	*D4	RB103	*C1	TP501	E2
C164	C1	C363	*A1	C528	F2	C707	*F4	D714	F4			Q716	G3	R224	*A2	R419	*E1	R539	*F2	R635	*C3	R725	*D4	RB104	*C1	TP502	G3
C165	*D2	C364	G3	C529	F2	C708	*F5	D715	*G4	JC100	*H3			R300	*C3	R420	*F1	R540	*F2	R636	*C4	R726	*D4	RB105	*C1	TP503	G3
C166	D1	C365	G3	C530	F2	C709	F4	D716	G4	JC200	B2	R100	*H4	R301	D2	R421	*E1	R541	*F2	R637	*C3	R727	*D5	RB200	*H4	TP504	F3
C167	C1	C366	*G3	C531	F2	C710	F4	D717	F5	JC201	B2	R101	*H4	R302	D2	R422	*E1	R542	F2	R638	*B4	R728	*D4	RB201	*G4	TP505	F3
C168	*D2	C367	*G3	C532	F2	C711	F5	D718	G4	JC500	F2	R102	*H3	R303	D2	R423	*E1	R543	F2	R639	*C4	R729	*D4	RB202	*G4	TP600	B4
C169	*D2	C368	*G3	C533	F2	C712	*E4	D719	G3	JC501	F2	R103	*H3	R304	D2	R424	*E1	R544	F2	R640	*B4	R730	*D4	RB203	*G4	TP601	B4
C170	*C1	C369	*G3	C534	*E3	C713	F4			JC502	F2	R104	*H4	R305	*D2	R425	*E1	R545	F2	R641	*C3	R731	*D4	RB204	*G4		
C171	D1	C400	*D1	C535	*E3	C714	F4	E1	A2	JC503	F2	R105	*H4	R306	*D2	R426	*E1	R546	F2	R642	*C4	R732	*D4	RB205	*G4	X300	C2
C172	*D2	C401	D1	C536	*E3	C715	F4	E2	D3	JC504	F2	R106	*H4	R307	D2	R427	*F1	R547	F2	R643	*C3	R733	*D4	RB206	*G5		
C173	*C1	C402	D1	C537	*E3	C716	F4	E3	G2	JC505	F2	R107	*H3	R308	*D2	R428	*F1	R548	F2	R644	*B4	R734	*D5	RB207	*H5		
C174	C1	C403	*D1	C538	*E3	C717	F4	E4	*E2	JC506	F2	R108	*H3	R309	*D2	R429	E1	R549	F2	R645	B5	R735	*D4	RB208	*G5		
C175	C1	C404	*D1	C539	*E3	C718	F5			JC507	F2	R109	H2	R310	D2	R430	*F1	R550	F2	R646	*C4	R736	*D5	RB209	*G5		
C176	C1	C405	E1	C540	*E3	C719	*G4	FB100	H2	JC700	*H3	R110	*H4	R311	C2	R431	*F1	R551	F2	R647	*B5	R737	*B3	RB210	*B3		
C177	*C1	C406	E2	C541	*E3	C720	*G4	FB101	H2	JC701	*H3	R111	*H4	R312	C2	R432	*F1	R552	F2	R648	B4	R738	*B3	RB211	*C3		
C178	*C1	C407	D1	C542	*F3	C721	*G4			JC702	*H3	R112	*H4	R313	*C2	R433	*F1	R553	F2	R649	*C4	R739	*B4	RB212	*C3		
C179	C1	C408	*D1	C543	*F3	C722	*G5	IC100	*H4	JC703	*H3	R113	*H3	R314	*C2	R434	*F1	R554	*F3	R650	*C5	R740	*B4	RB213	*C3		
C200	*G4	C409	*D2	C544	E2	C723	*G4	IC101	*H3	JC704	G4	R114	H2	R315	*C2	R435	E1	R555	*F3	R651	*C4	R741	*B4	RB214	A2		
C201	*G4	C410	*E1	C545	E2	C724	*G5	IC102	D2			R115	*H4	R316	*C2	R436	*F2	R556	*F2	R652	B5	R742	*B4	RB215	A2		
C202	*G4	C411	*E1	C546	E2	C725	*G4	IC103	D3	L100	H5	R116	*H4	R317	*C2	R437	*F1	R557	*F3	R653	*C4	R743	*B4	RB216	A3		
C203	*G4	C412	E1	C547	*E3	C726	*G5	IC104	G2	L101	H3	R117	*H2	R318	*C2	R438	*F1	R558	F2	R654	B5	R744	*B4	RB217	B3		
C204	*G4	C413	E1	C548	E3	C727	*E3	IC105	*H2	L102	H2	R118	*H2	R319	*C2	R439	*F1	R559	F2	R655	B5	R745	*B4	RB218	B3		
C205	*B3	C414	*D1	C549	E3			IC106	*H3	L103	G2	R119	*H3	R320	*C2	R440	*F1	R560	F2	R656	B4	R746	*B4	RB219	*B3		
C206	*B2	C415	*D1	C550	*E2	CL100	H4	IC107	C1	L104	H2	R120	*H3	R321	*A1	R441	*F1	R561	F2	R657	*D3	R747	*B4	RB300	*D3		
C207	*B2	C416	E1	C551	*E2	CL101	H4	IC108	C1	L105	H3	R121	*H2	R322	*A1	R442	*F1	R562	*F3	R658	B4	R748	*B4	RB301	*D3		
C208	A2	C417	*E1	C552	E2	CL102	H2	IC109	D1	L106	H3	R122	*H2	R323	*A1	R443	*F1	R563	*F3	R659	B4	R749	*B4	RB302	*A2		
C209	*B2	C418	*E1	C553	E2	CL103	G2	IC200	G5	L300	*B1	R123	*H2	R324	H1	R444	*F1	R564	*F3	R660	*C4	R750	*B4	RB303	*A3		

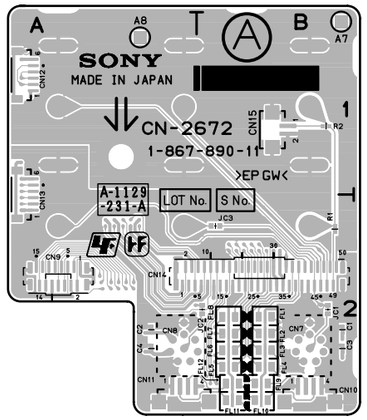

CN-2672 -A SIDE-
SUFFIX: -11, 31

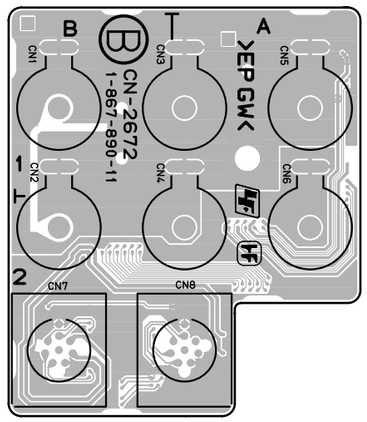

CN-2672 -B SIDE-
SUFFIX: -11, 31

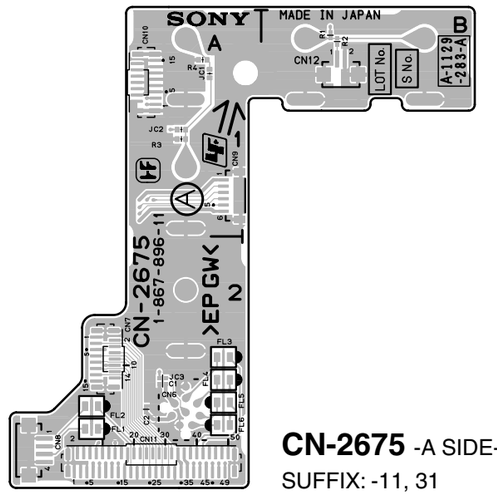

CN-2675 -A SIDE-
SUFFIX: -11, 31

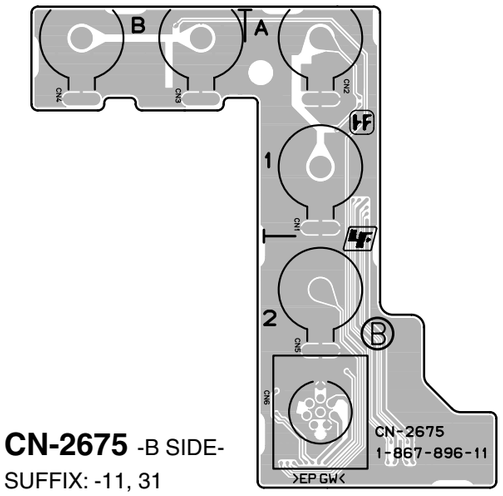

CN-2675 -B SIDE-
SUFFIX: -11, 31



CN-2673 -A SIDE-
SUFFIX: -11, 31



CN-2673 -B SIDE-
SUFFIX: -11, 31



CN-2676 -A SIDE-
SUFFIX: -11, 31



CN-2676 -B SIDE-
SUFFIX: -11, 31

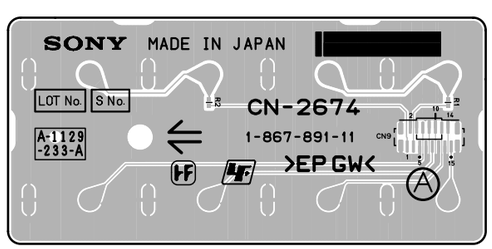

CN-2674 -A SIDE-
SUFFIX: -11, 31

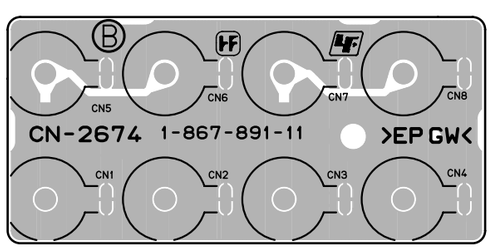

CN-2674 -B SIDE-
SUFFIX: -11, 31



CN-2677 -A SIDE-
SUFFIX: -11, 31

CN-2677 -B SIDE-
SUFFIX: -11, 31

8-10

CN-2678, CN-2700, CN-2718, CN-2805, CNB-21

CN-2678 -A SIDE-
SUFFIX: -11



CN-2678 -B SIDE-
SUFFIX: -11

CN-2678 -A SIDE-
SUFFIX: -12, 31



CN-2678 -B SIDE-
SUFFIX: -12, 31

CN-2700 -A SIDE-
SUFFIX: -11



CN-2700 -B SIDE-
SUFFIX: -11

CN-2700 -A SIDE-
SUFFIX: -12, 31



CN-2700 -B SIDE-
SUFFIX: -12, 31



CN-2805 -A SIDE-
SUFFIX: -11, 31



CN-2805 -B SIDE-
SUFFIX: -11, 31



CN-2718 -A SIDE-
SUFFIX: -11, 31



CN-2718 -B SIDE-
SUFFIX: -11, 31

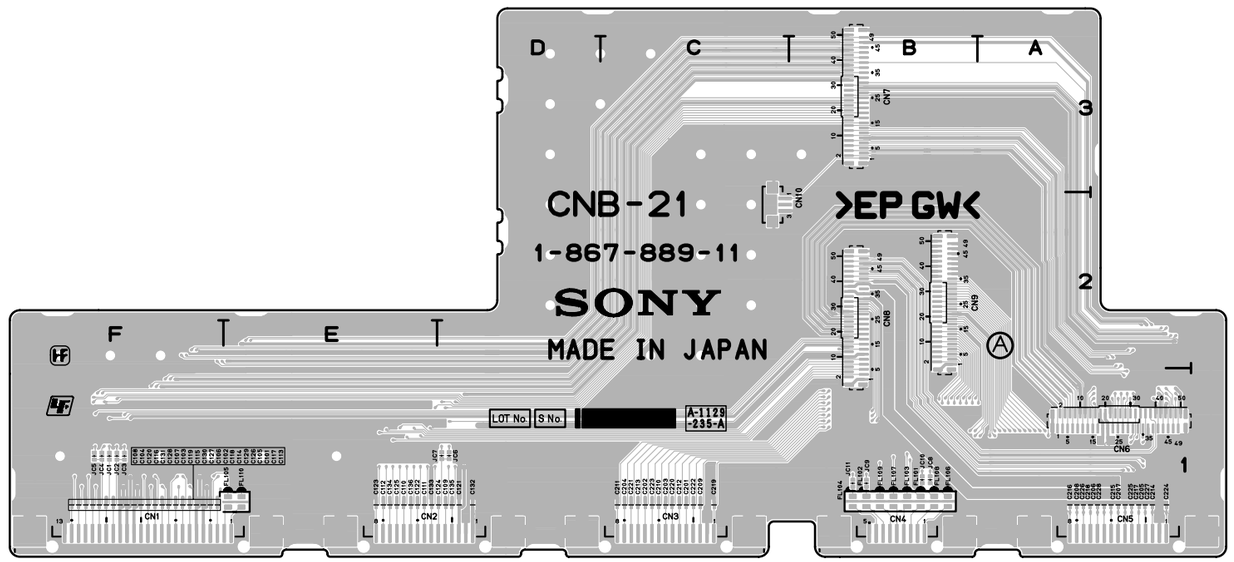

CNB-21 -A SIDE-
SUFFIX: -11, 31

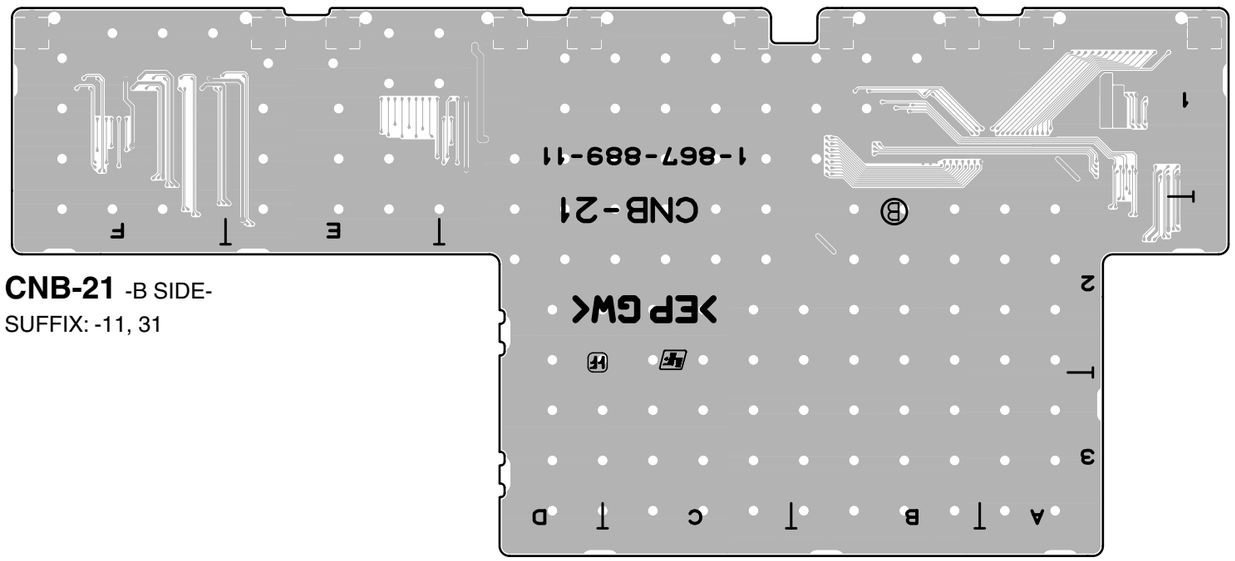

CNB-21 -B SIDE-
SUFFIX: -11, 31

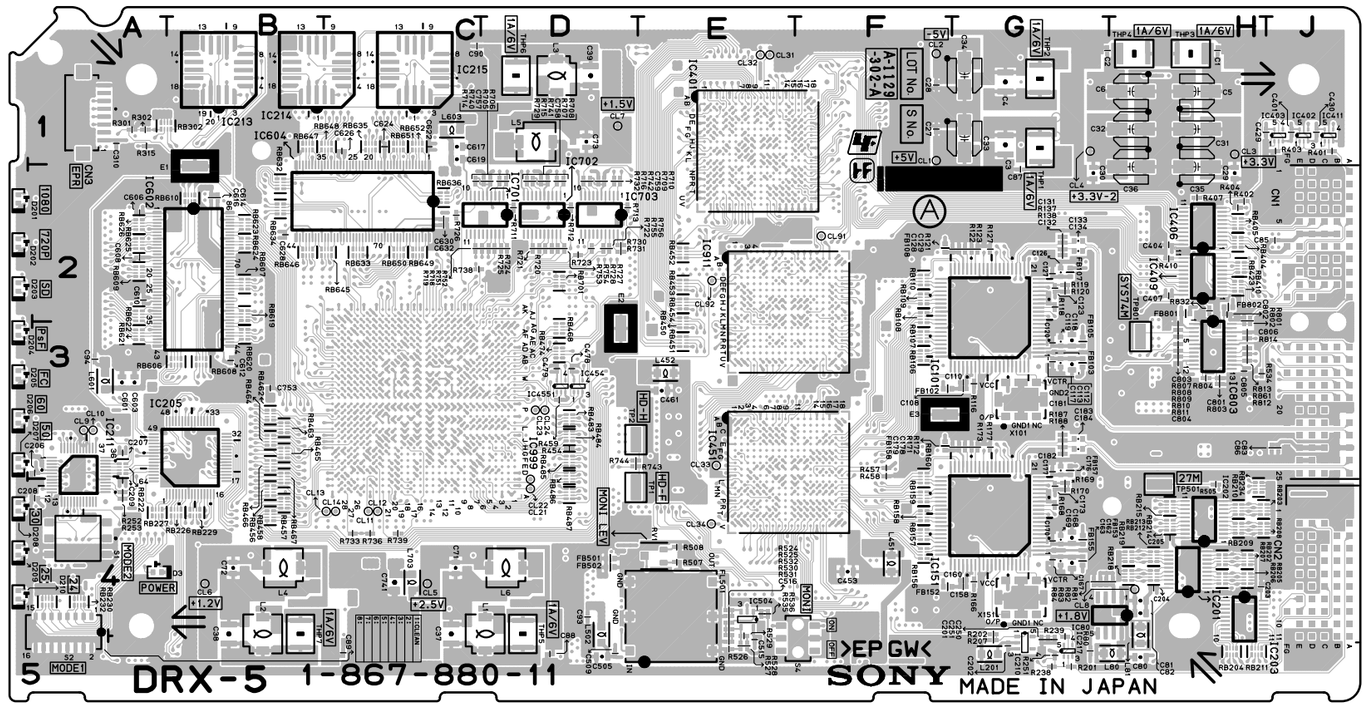

DRX-5 -A SIDE-
SUFFIX: -11, 12, 13, 31

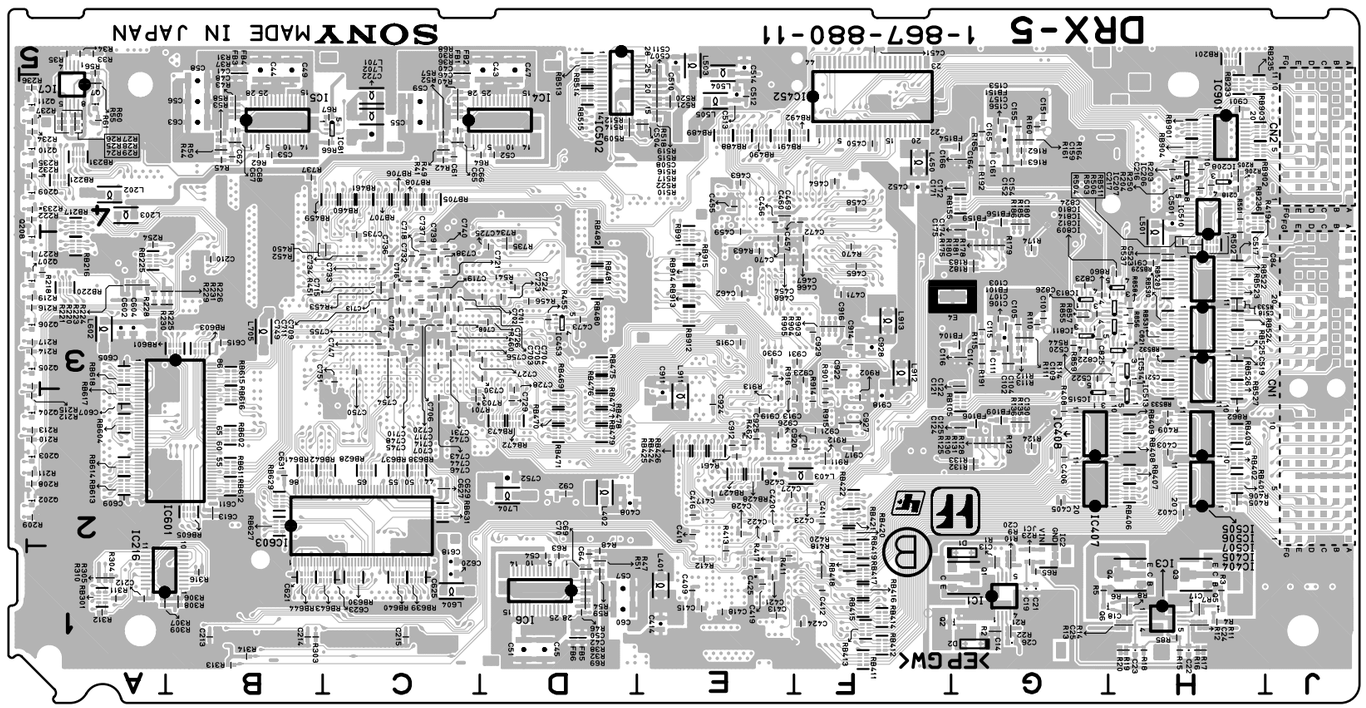

DRX-5 -B SIDE-
SUFFIX: -11, 12, 13, 31

DRX-5 (1-867-880-11, 12, 13, 31)
---

*:B SIDE

C1	H1	C111	*G3	C413	*E1	C627	*C2	C923	*F3	IC2	*G1	L601	A3	R61	*A4	R222	*A4	R522	*E4	R911	*F2	RB459	*C4	RB641	*B2
C2	G1	C112	G3	C414	*E1	C628	B2	C924	*E2	IC3	*H1	L602	*A3	R62	*B4	R223	*A3	R524	E4	R912	*F2	RB460	*C4	RB642	*C2
C3	G1	C113	G3	C415	*E1	C629	*C2	C925	*E2	IC4	*C4	L603	C1	R63	*D1	R224	*A3	R525	E4	R913	*E2	RB461	*C4	RB643	*C1
C4	G1	C114	*G3	C416	*E2	C630	C2	C926	*E2	IC5	*B4	L604	*C1	R64	*D4	R225	*B3	R526	E5	R914	*F2	RB462	B3	RB644	*B1
C5	H1	C115	*G3	C417	*E2	C631	*B2	C927	*F2	IC6	*D1	L701	*C4	R65	*G1	R226	*B3	R527	E5	R915	*F2	RB463	B3	RB645	C2
C6	H1	C116	*G3	C418	*E1	C632	C2	C928	*F3	IC7	*A5	L702	*C4	R66	*C4	R227	*A3	R528	E5	R916	*E3	RB464	B3	RB646	B2
C13	*G1	C117	G3	C419	*E1	C701	*C3	C929	*F3	IC80	H4	L703	C4	R67	*C4	R228	*A3	R529	E5			RB465	B3	RB647	B1
C14	*G1	C118	G3	C420	*E2	C702	*C3	C930	*E3	IC81	*C4	L704	*D2	R68	*C4	R229	*A3	R530	E4	RB105	*G2	RB466	B3	RB648	C1
C17	*H1	C119	G3	C421	*E1	C703	*C3	C931	*F3	IC101	G2	L705	*B3	R69	*D1	R230	*A3	R531	E4	RB106	F3	RB467	B3	RB649	C2
C18	*H1	C120	G3	C422	*E2	C704	*C3			IC151	G4	L911	*E2	R80	G5	R231	*A3	R532	E4	RB107	F3	RB468	D3	RB650	C2
C19	*G1	C121	*G3	C423	*F2	C705	*C3	CL1	F1	IC201	H4	L912	*F3	R81	H4	R232	*A4	R533	*H3	RB108	F2	RB469	*D2	RB651	C1
C20	*G1	C122	*G3	C424	*F1	C706	*C3	CL2	F1	IC202	H4	L913	*F3	R82	G4	R233	*A4	R534	H3	RB109	F2	RB470	*D2	RB652	C1
C21	*G1	C123	G2	C425	*E1	C707	*C3	CL3	H1	IC203	H4			R83	G4	R234	*A4	R535	E4	RB110	F2	RB471	*D2	RB701	D2
C22	*H1	C124	*G2	C426	*E2	C708	*C3	CL4	G1	IC205	B3	Q1	*G1	R84	G4	R235	*A4	R536	E4	RB155	*G4	RB472	*D2	RB705	*C4
C23	*H1	C125	*G2	C427	*E2	C709	*C3	CL5	C4	IC206	*H4	Q2	*G1	R85	*H1	R236	*A4	R537	*H3	RB156	F4	RB473	*D2	RB706	*C4
C24	*H1	C126	G2	C428	*E2	C710	*C3	CL6	B4	IC207	*H4	Q3	*H1	R110	*G3	R237	*A4	R541	*D3	RB157	F4	RB474	D3	RB707	*C4
C25	*H1	C127	G2	C429	H1	C711	*C3	CL7	D1	IC208	*H4	Q4	*H1	R111	*G3	R238	G5	R544	*H3	RB158	F4	RB475	*D3	RB708	*C4
C26	*G1	C128	G2	C430	J1	C712	*C3	CL8	H4	IC210	G5	Q5	*H1	R112	*G3	R239	G5	R701	*C2	RB159	F4	RB476	*D3	RB901	*H4
C27	F1	C129	G2	C450	*F4	C713	*C3	CL9	A3	IC211	A3	Q6	*G1	R113	*G3	R250	*H4	R703	*C2	RB160	F3	RB477	*D2	RB902	*H4
C28	F1	C130	*G2	C451	*F5	C714	*C3	CL10	A3	IC213	B1	Q7	*A4	R114	*G3	R251	G5	R705	D2	RB201	*H5	RB478	*D2	RB903	*H4
C29	H2	C131	G2	C452	*F4	C715	*C3	CL11	C4	IC214	B1	Q202	*A2	R115	*G3	R252	A4	R706	D2	RB202	H4	RB479	*D2	RB904	*H4
C30	G2	C132	G2	C453	F4	C716	*C3	CL12	C4	IC215	C1	Q203	*A2	R116	G3	R253	A4	R707	D2	RB203	H4	RB480	*D3	RB911	*E3
C31	H1	C133	G2	C454	*E3	C717	*C3	CL13	C4	IC216	*B1	Q204	*A2	R118	G2	R254	*A3	R708	D2	RB204	H5	RB481	*D3	RB912	*E3
C32	H1	C134	G2	C455	*E4	C718	*C3	CL14	C4	IC217	G5	Q205	*A3	R119	G2	R301	A1	R709	D2	RB205	H4	RB482	*D3	RB913	*E3
C33	G1	C151	*G4	C456	*E4	C719	*C3	CL21	D4	IC401	E1	Q206	*A3	R120	G2	R302	A1	R710	D2	RB206	H4	RB483	D3	RB914	*E3
C34	G1	C152	*G4	C457	*F4	C720	*C3	CL22	D4	IC402	J1	Q207	*A3	R121	G2	R303	*B1	R711	D2	RB207	H4	RB484	D3	RB915	*E3
C35	H2	C153	*G4	C458	*F4	C721	*C3	CL23	D3	IC403	J1	Q208	*A3	R122	G2	R304	*A1	R712	D2	RB208	H4	RB485	D3		
C36	H2	C154	*G4	C459	*E4	C722	*C4	CL24	D3	IC404	*H2	Q209	*A4	R123	G2	R305	*A1	R713	D2	RB209	H4	RB486	D3	RV1	E4
C37	C4	C155	*G4	C460	*E4	C723	*D3	CL31	E1	IC405	*H2	Q210	*A4	R124	*G2	R306	*B1	R714	C2	RB210	H4	RB487	D4		
C38	B4	C156	*G4	C461	E3	C724	*D3	CL32	E1	IC406	H2	Q211	*A4	R125	*G2	R307	*A1	R715	D2	RB211	H5	RB488	*E4	S1	A4
C39	D1	C157	*G4	C462	*E3	C725	*D3	CL33	E3	IC407	*H2			R127	G2	R308	*B1	R716	D2	RB212	H4	RB489	*E4	S2	A4
C40	*C4	C158	G4	C463	*E4	C726	*D3	CL34	E4	IC408	*H2	R1	*G1	R128	*G2	R309	*A1	R718	D2	RB213	H4	RB490	*E4	S4	F5
C41	*B4	C159	*G4	C464	*F4	C727	*D3	CL91	F2	IC409	H2	R2	*G1	R129	*G2	R310	*A1	R719	C2	RB214	H4	RB491	*E4		
C42	*D1	C160	G4	C465	*F3	C728	*D2	CL92	E2	IC411	J1	R3	*H1	R130	*G2	R311	*A1	R720	D2	RB215	H4	RB492	*F4	THP1	G1
C43	*D5	C161	*G4	C466	*F3	C729	*D2			IC451	E3	R4	*H1	R131	*G2	R312	*A1	R721	D2	RB216	*A3	RB511	*H3	THP2	G1
C44	*B5	C162	G4	C467	*F3	C730	*D3	CN1	J3	IC452	*F4	R5	*G1	R132	*G2	R313	*B1	R722	D2	RB217	*A4	RB513	*D5	THP3	H1
C45	*D1	C163	G4	C468	*E3	C731	*C3	CN2	J5	IC453	*D3	R6	*H1	R133	*G2	R314	*B1	R723	D2	RB218	H4	RB514	*D4	THP4	H1
C46	*C4	C164	*G4	C469	*E4	C732	*C3	CN3	A1	IC454	D3	R7	*H1	R135	*G2	R315	A1	R724	D2	RB219	H4	RB515	*D4	THP5	D4
C47	*D5	C165	*G4	C470	*E3	C733	*C3			IC455	D3	R8	*H1	R136	*G2	R316	*B1	R725	D2	RB220	*A3	RB522	*H3	THP6	D1
C48	*B4	C166	*G4	C471	*F3	C734	*C3	D1	*G1	IC502	*D5	R9	*G1	R137	G2	R401	J1	R726	C2	RB221	*A4	RB523	*H3	THP7	B4
C49	*B5	C167	G4	C472	*F3	C735	*C3	D2	*G1	IC504	E4	R10	*G1	R138	G2	R402	H2	R727	D2	RB222	A3	RB524	*H3		
C50	*D1	C168	G4	C473	*D3	C736	*C3	D3	A4	IC505	*H3	R11	*H1	R160	*G4	R403	J1	R728	D2	RB225	*A3	RB525	*H3	TP1	D4
C51	*D1	C169	G4	C478	D3	C737	*C3	D201	A2	IC506	*H3	R12	*H1	R161	*G4	R404	H2	R729	D2	RB226	B4	RB526	*H3	TP2	D3
C52	*D4	C170	G4	C479	D3	C738	*C3	D202	A2	IC507	*H3	R13	*H1	R162	*G4	R405	*H2	R730	D2	RB227	A4	RB527	*H2	TP501	H4
C53	*B4	C171	*G4	C501	*H4	C739	*C3	D203	A2	IC510	*H4	R14	*H1	R163	*G4	R406	*H2	R731	D2	RB229	B4	RB528	*H3	TP801	H3
C54	*D1	C172	*G4	C504	*E4	C740	*C3	D204	A3	IC513	*H2	R15	*H1	R164	*G4	R407	H2	R732	D2	RB230	A4	RB529	*H3		
C55	*C4	C173	G4	C505	D5	C741	C4	D205	A3	IC514	*H3	R16	*H1	R165	*G4	R408	*G2	R733	C4	RB231	*A4	RB530	*H3	X101	G3
C56	*B4	C174	*G4	C507	*E5	C742	*C3	D206	A3	IC515	*G2	R17	*H1	R166	G4	R409	*H2	R734	*D3	RB232	A4	RB531	*H3	X151	G4
C57	*D1	C175	*G4	C508	*E4	C743	*C3	D207	A3	IC601	*A3	R18	*H1	R168	G4	R410	H2	R735	*D3	RB233	*H4	RB532	*H3		
C58	*B4	C176	G3	C509	D5	C744	*C3	D208	A4	IC602	A2	R19	*H1	R169	G4	R411	*E1	R736	C4	RB234	H4	RB533	*H2		
C59	*C4	C177	G3	C510	*E5	C745	*C3	D209	A4	IC603	*B1	R20	*H1	R170	G4	R412	*E1	R737	*B4	RB235	*H4	RB601	*B3		
C60	*D1	C178	G3	C511	*E5	C746	*C2	D210	A4	IC604	C2	R21	*G1	R171	G3	R413	*E1	R738	C2	RB236	*H4	RB602	*B2		
C61	*C4	C179	G3	C512	*E4	C747	*C3			IC701	D2	R22	*G1	R172	G3	R417	*E1	R739	C4	RB301	*A1	RB603	*B3		
C62	*B4	C180	*G4	C513	*E4	C748	*C3	E1	B2	IC702	D2	R23	*G1	R173	G3	R418	*F1	R740	D2	RB302	A1	RB604	*A2		
C63	*B4	C181	G3	C514	*E5	C749	*C3	E2	D3	IC703	D2	R24	*A4	R174	*G3	R419	*H3	R741	D2	RB401	*H2	RB605	*B2		
C64	*D1	C182	G3	C515	E5	C750	*C3	E3	F3	IC803	H3	R25	*A4	R175	*G3	R420	*F1	R742	D2	RB402	*H2	RB606	B3		
C65	*C4	C183	G3	C516	E5	C751	*C3	E4	*G3	IC809	*H3	R26	*A4	R177	G3	R450	*C3	R743	D3	RB403	*H2	RB607	B2		
C66	*C4	C184	G3	C517	*H3	C752	*D2			IC810	*H3	R27	*A4	R178	*G3	R451	*C3	R744	D3	RB404	H2	RB608	B3		
C67	*B4	C201	G5	C518	*H3	C753	B3	FB1	*C5	IC811	*G3	R28	*A4	R179	*G3	R452	*C3	R751	D2	RB405	H2	RB609	A2		
C68	*B4	C202	G5	C519	*H3	C754	*C3	FB2	*C5	IC812	*H3	R29	*A4	R180	*G3	R453	*C3	R752	D2	RB406	*H2	RB610	B2		
C69	*D1	C203	H4	C520	*H2	C755	*C3	FB3	*B5	IC813	*G3	R30	*C4	R181	*G3	R454	D3	R753	D2	RB407	*H2	RB611	*B2		
C70	*D1	C204	H4	C521	*H3	C756	*C3	FB4	*B5	IC814	*H3	R31	*B4	R182	*G3	R455	*D3	R754	D2	RB408	*H2	RB612	*B2		
C71	C4	C205	H4	C522	*G3	C757	D2	FB5	*D1	IC901	*H4	R32	*D1	R183	*G3	R456	*D3	R755	D2	RB409	*H2	RB613	*A2		
C72	B4	C206	A3	C523	*H3	C758	D2	FB6	*D1	IC911	E2	R33	*A5	R185	*G4	R457	F3	R756	D2	RB410	H2	RB614	*A2		
C73	D1	C207	A3	C601	A3	C759	D2	FB101	*G3	IC999	C3	R34	*A5	R186	*G4	R458	F3	R801	H2	RB411	*F1	RB615	*B3		
C80	H5	C208	A4	C602	*A3	C801	H3	FB102	F3			R35	*A5	R187	G3	R459	D3	R802	H2	RB412	*F1	RB616	*B2		
C81	H4	C209	A4	C603	A3	C802	H2	FB103	G3	JC1	*G1	R36	*C4	R188	G3	R460	*C3	R803	H3	RB413	*F1	RB617	*A2		
C82	H4	C210	*B3	C604	*A3	C803	H3	FB104	*G3			R37	*B4	R191	*G3	R461	*E2	R804	H3	RB414	*F1	RB618	*A3		
C83	J3	C212	*A1	C605	*A3	C804	H3	FB105	G3	L1	D4	R38	*D1	R192	*G4	R462	*E2	R807	H3	RB415	*F1	RB619	B2		
C84	*H3	C213	*B1	C606	A2	C805	H3	FB106	*G2	L2	B4	R40	*C4	R201	G5	R463	*E3	R808	H3	RB416	*F1	RB620	B3		
C85	J2	C214	*B1	C607	*A2	C806	H3	FB107	G2	L3	D1	R41	*C4	R202	G4	R470	*F3	R809	H3	RB417	*F1	RB621	A3		
C86	J3	C215	*C1	C608	A2	C821	*H3	FB108	F2	L4	B4	R42	*C4	R203	*H4	R501	*H4	R810	H3	RB418	*F1	RB622	A2		
C87	G2	C216	*H4	C609	*A2	C822	*G3	FB109	*G2	L5	D1	R43	*B4	R204	*H4	R502	*H3	R811	H3	RB419	*F1	RB623	B2		
C88	D5	C217	*H4	C610	A2	C823	*G3	FB151	*G4	L6	D4	R44	*B4	R205	*H4	R503	*H3	R812	H3	RB420	*F2	RB624	B2		
C89	C5	C218	*H4	C611	*B2	C824	*H3	FB152	F4	L80	H5	R45	*B4	R206	*H4	R504	*H3	R813	H3	RB421	*F2	RB625	A2		
C90	C1	C250	G5	C612	B3	C825	*G3	FB153	G4	L81	H4	R46	*D1	R207	G5	R505	H4	R814	H3	RB422	*F2	RB626	A2		
C91	*H3	C251	G5	C613	*B2	C826	*G3	FB154	*G4	L201	G5	R47	*D1	R208	*A2	R506	*H3	R832	H2	RB423	H2	RB627	*B2		
C92	*D2	C310	A1	C614	B2	C901	*H4	FB155	G4	L202	*A4	R48	*D1	R209	*A2	R507	E4	R855	*G3	RB424	*E2	RB628	*C2		
C93	D4	C401	J1	C615	*B3	C911	*E2	FB156	*G4	L203	*A4	R49	*C4	R210	*A2	R508	E4	R856	*H3	RB425	*E2	RB629	*B2		
C94	A3	C402	*H2	C616	B2	C912	*E2	FB157	G3	L401	*E1	R50	*B4	R211	*A2	R509	*D4	R857	*G3	RB426	*E2	RB630	*C1		
C101	*G3	C403	*H2	C617	C1	C913	*F2	FB158	F3	L402	*D2	R51	*D1	R212	*A2	R510	*E4	R858	*H3	RB427	*E2	RB631	*C2		
C102	*G3	C404	H2	C618	*C1	C914	*F3	FB159	*G4	L403	*F2	R52	*C4	R213	*A2	R512	*D4	R859	*G3	RB428	*E2	RB632	B2		
C103	*G3	C405	*G2	C619	C1	C915	*E3	FB501	D4	L450	*F4	R53	*B4	R214	*A3	R514	*D4	R860	*G3	RB450	E3	RB633	C2		
C104	*G3	C406	*G2	C620	*C1	C916	*F3	FB502	D4	L451	F4	R54	*D1	R215	*A3	R515	*E4	R861	H3	RB451	E3	RB634	B2		
C105	*G3	C407	H2	C621	*B1	C917	*F2	FB801	H2	L452	E3	R55	*A4	R216	*A3	R516	*E4	R862	*H2	RB452	E2	RB635	C1		
C106	*G3	C408	*D2	C622	C1	C918	*F2	FB802	H2	L501	*H3	R56	*A5	R217	*A3	R517	*E4	R901	*F3	RB453	E2	RB636	C2		
C107	*G3	C409	*E1	C623	*C1	C919	*E2			L502	D4	R57	*C4	R218	*A3	R518	*E4	R902	*F2	RB454	E2	RB637	*C2		
C108	G3	C410	*E2	C624	C1	C920	*F2	FL501	E4	L503	*E5	R58	*B4	R219	*A3	R519	*E4	R903	*F3	RB456	B4	RB638	*C2		
C109	*G3	C411	*F2	C625	*C1	C921	*F2			L504	*E5	R59	*D1	R220	*A3	R520	*E4	R904	*F3	RB457	B4	RB639	*C1		
C110	G3	C412	*F1	C626	C1	C922	*F3	IC1	*G1	L505	*E4	R60	*A4	R221	*A3	R521	*E4	R905	*F3	RB458	B4	RB640	*C1		

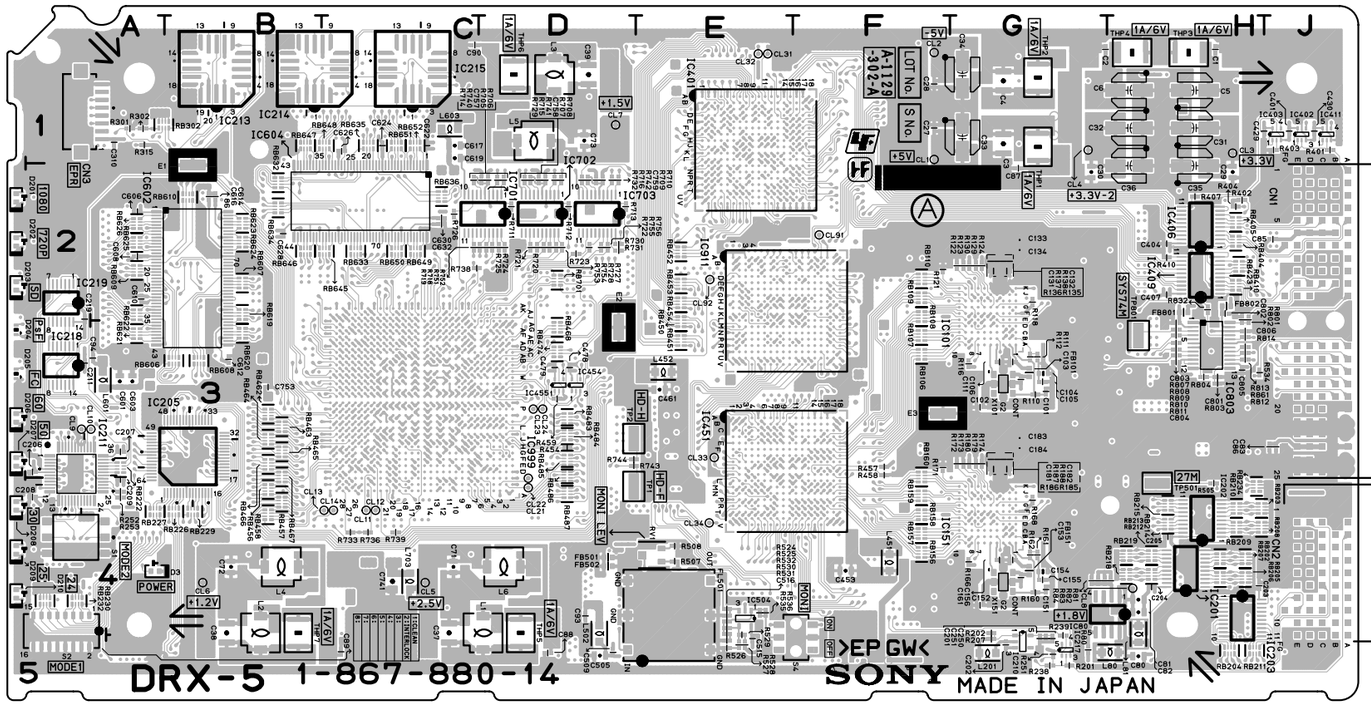

DRX-5 -A SIDE-
SUFFIX: -14

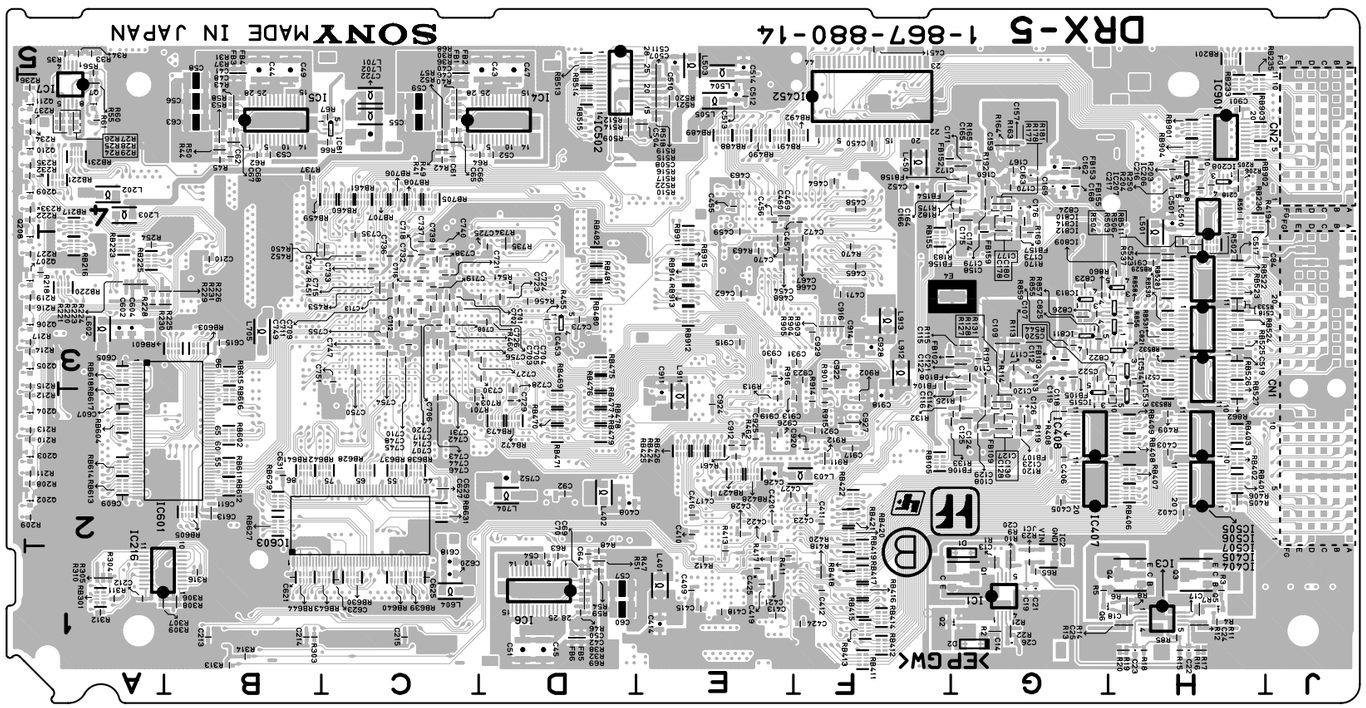

DRX-5 -B SIDE-
SUFFIX: -14

DRX-5 (1-867-880-14)
---

*:B SIDE

C1	H1	C111	G3	C411	*F2	C625	*C1	C921	*F2	IC1	*G1	L503	*E5	R58	*B4	R219	*A3	R519	*E4	R903	*F3	RB454	E2	RB637	*C2
C2	G1	C112	*G3	C412	*F1	C626	C1	C922	*F3	IC2	*G1	L504	*E5	R59	*D1	R220	*A3	R520	*E4	R904	*F3	RB456	B4	RB638	*C2
C3	G1	C113	*G3	C413	*E1	C627	*C2	C923	*F3	IC3	*H1	L505	*E4	R60	*A4	R221	*A3	R521	*E4	R905	*F3	RB457	B4	RB639	*C1
C4	G1	C114	*G2	C414	*E1	C628	B2	C924	*E2	IC4	*C4	L601	A3	R61	*A4	R222	*A4	R522	*E4	R911	*F2	RB458	B4	RB640	*C1
C5	H1	C115	*G3	C415	*E1	C629	*C2	C925	*E2	IC5	*B4	L602	*A3	R62	*B4	R223	*A3	R524	E4	R912	*F2	RB459	*C4	RB641	*B2
C6	H1	C116	*G2	C416	*E2	C630	C2	C926	*E2	IC6	*D1	L603	C1	R63	*D1	R224	*A3	R525	E4	R913	*E2	RB460	*C4	RB642	*C2
C13	*G1	C117	*G3	C417	*E2	C631	*B2	C927	*F2	IC7	*A5	L604	*C1	R64	*D4	R225	*B3	R526	E5	R914	*F2	RB461	*C4	RB643	*C1
C14	*G1	C118	*G3	C418	*E1	C632	C2	C928	*F3	IC80	H4	L701	*C4	R65	*G1	R226	*B3	R527	E5	R915	*F2	RB462	B3	RB644	*B1
C17	*H1	C119	*G3	C419	*E1	C701	*C3	C929	*F3	IC81	*C4	L702	*C4	R66	*C4	R227	*A3	R528	E5	R916	*E3	RB463	B3	RB645	C2
C18	*H1	C120	*G3	C420	*E2	C702	*C3	C930	*E3	IC101	G2	L703	C4	R67	*C4	R228	*A3	R529	E5			RB464	B3	RB646	B2
C19	*G1	C121	*G3	C421	*E1	C703	*C3	C931	*F3	IC151	G4	L704	*D2	R68	*C4	R229	*A3	R530	E4	RB105	*F2	RB465	B3	RB647	B1
C20	*G1	C122	*G3	C422	*E2	C704	*C3			IC201	H4	L705	*B3	R69	*D1	R230	*A3	R531	E4	RB106	F3	RB466	B3	RB648	C1
C21	*G1	C123	*G2	C423	*F2	C705	*C3	CL1	F1	IC202	H4	L911	*E2	R80	G5	R231	*A3	R532	E4	RB107	F3	RB467	B3	RB649	C2
C22	*H1	C124	*G2	C424	*F1	C706	*C3	CL2	F1	IC203	H4	L912	*F3	R81	H4	R232	*A4	R533	*H3	RB108	F2	RB468	D3	RB650	C2
C23	*H1	C125	*G2	C425	*E1	C707	*C3	CL3	H1	IC205	B3	L913	*F3	R82	G4	R233	*A4	R534	H3	RB109	F2	RB469	*D2	RB651	C1
C24	*H1	C126	*G2	C426	*E2	C708	*C3	CL4	G1	IC206	*H4			R83	G4	R234	*A4	R535	E4	RB110	F2	RB470	*D2	RB652	C1
C25	*H1	C127	*G2	C427	*E2	C709	*C3	CL5	C4	IC207	*H4	Q1	*G1	R84	G4	R235	*A4	R536	E4	RB155	*F3	RB471	*D2	RB701	D2
C26	*G1	C128	*G2	C428	*E2	C710	*C3	CL6	B4	IC208	*H4	Q2	*G1	R85	*H1	R236	*A4	R537	*H3	RB156	F4	RB472	*D2	RB705	*C4
C27	F1	C129	*G2	C429	H1	C711	*C3	CL7	D1	IC210	G5	Q3	*H1	R110	G3	R237	*A4	R541	*D3	RB157	F4	RB473	*D2	RB706	*C4
C28	F1	C130	*G2	C430	J1	C712	*C3	CL8	H4	IC211	A3	Q4	*H1	R111	G3	R238	G5	R544	*H3	RB158	F4	RB474	D3	RB707	*C4
C29	H2	C131	G2	C450	*F4	C713	*C3	CL9	A3	IC213	B1	Q5	*H1	R112	G3	R239	G5	R701	*C2	RB159	F4	RB475	*D3	RB708	*C4
C30	G2	C132	G2	C451	*F5	C714	*C3	CL10	A3	IC214	B1	Q6	*G1	R113	*G3	R250	*H4	R703	*C2	RB160	F3	RB476	*D3	RB901	*H4
C31	H1	C133	G2	C452	*F4	C715	*C3	CL11	C4	IC215	C1	Q7	*A4	R114	*G3	R251	G5	R705	D2	RB201	*H5	RB477	*D2	RB902	*H4
C32	H1	C134	G2	C453	F4	C716	*C3	CL12	C4	IC216	*B1	Q202	*A2	R115	*G3	R252	A4	R706	D2	RB202	H4	RB478	*D2	RB903	*H4
C33	G1	C151	G4	C454	*E3	C717	*C3	CL13	C4	IC217	G5	Q203	*A2	R116	G3	R253	A4	R707	D2	RB203	H4	RB479	*D2	RB904	*H4
C34	G1	C152	G4	C455	*E4	C718	*C3	CL14	C4	IC218	A3	Q204	*A2	R118	G2	R254	*A3	R708	D2	RB204	H5	RB480	*D3	RB911	*E3
C35	H2	C153	G4	C456	*E4	C719	*C3	CL21	D4	IC219	A2	Q205	*A3	R119	*G2	R301	A1	R709	D2	RB205	H4	RB481	*D3	RB912	*E3
C36	H2	C154	G4	C457	*F4	C720	*C3	CL22	D4	IC401	E1	Q206	*A3	R120	*G2	R302	A1	R710	D2	RB206	H4	RB482	*D3	RB913	*E3
C37	C4	C155	G4	C458	*F4	C721	*C3	CL23	D3	IC402	J1	Q207	*A3	R121	F2	R303	*B1	R711	D2	RB207	H4	RB483	D3	RB914	*E3
C38	B4	C156	G4	C459	*E4	C722	*C4	CL24	D3	IC403	J1	Q208	*A3	R122	G2	R304	*A1	R712	D2	RB208	H4	RB484	D3	RB915	*E3
C39	D1	C157	*G4	C460	*E4	C723	*D3	CL31	E1	IC404	*H2	Q209	*A4	R123	G2	R305	*A1	R713	D2	RB209	H4	RB485	D3		
C40	*C4	C158	*G4	C461	E3	C724	*D3	CL32	E1	IC405	*H2	Q210	*A4	R124	G2	R306	*B1	R714	C2	RB210	H4	RB486	D3	RV1	E4
C41	*B4	C159	*G4	C462	*E3	C725	*D3	CL33	E3	IC406	H2	Q211	*A4	R125	*G2	R307	*A1	R715	D2	RB211	H5	RB487	D4		
C42	*D1	C160	*G4	C463	*E4	C726	*D3	CL34	E4	IC407	*H2			R127	*G2	R308	*B1	R716	D2	RB212	H4	RB488	*E4	S1	A4
C43	*D5	C161	G4	C464	*F4	C727	*D3	CL91	F2	IC408	*H2	R1	*G1	R128	*G2	R309	*A1	R718	D2	RB213	H4	RB489	*E4	S2	A4
C44	*B5	C162	*G4	C465	*F3	C728	*D2	CL92	E2	IC409	H2	R2	*G1	R129	G2	R310	*A1	R719	C2	RB214	H4	RB490	*E4	S4	F5
C45	*D1	C163	*G4	C466	*F3	C729	*D2			IC411	J1	R3	*H1	R130	G2	R311	*A1	R720	D2	RB215	H4	RB491	*E4		
C46	*C4	C164	*G4	C467	*F3	C730	*D3	CN1	J3	IC451	E3	R4	*H1	R131	*G2	R312	*A1	R721	D2	RB216	*A3	RB492	*F4	THP1	G1
C47	*D5	C165	*G4	C468	*E3	C731	*C3	CN2	J5	IC452	*F4	R5	*G1	R132	*G2	R313	*B1	R722	D2	RB217	*A4	RB511	*H3	THP2	G1
C48	*B4	C166	*G4	C469	*E4	C732	*C3	CN3	A1	IC453	*D3	R6	*H1	R133	*G2	R314	*B1	R723	D2	RB218	H4	RB513	*D5	THP3	H1
C49	*B5	C167	*G4	C470	*E3	C733	*C3			IC454	D3	R7	*H1	R135	G2	R315	A1	R724	D2	RB219	H4	RB514	*D4	THP4	H1
C50	*D1	C168	*G4	C471	*F3	C734	*C3	D1	*G1	IC455	D3	R8	*H1	R136	G2	R316	*B1	R725	D2	RB220	*A3	RB515	*D4	THP5	D4
C51	*D1	C169	*G4	C472	*F3	C735	*C3	D2	*G1	IC502	*D5	R9	*G1	R137	G2	R401	J1	R726	C2	RB221	*A4	RB522	*H3	THP6	D1
C52	*D4	C170	*G4	C473	*D3	C736	*C3	D3	A4	IC504	E4	R10	*G1	R138	G2	R402	H2	R727	D2	RB222	A3	RB523	*H3	THP7	B4
C53	*B4	C171	*G4	C478	D3	C737	*C3	D201	A2	IC505	*H3	R11	*H1	R160	G4	R403	J1	R728	D2	RB223	*A3	RB524	*H3		
C54	*D1	C172	*G4	C479	D3	C738	*C3	D202	A2	IC506	*H3	R12	*H1	R161	G4	R404	H2	R729	D2	RB225	*A3	RB525	*H3	TP1	D4
C55	*C4	C173	*G4	C501	*H4	C739	*C3	D203	A2	IC507	*H3	R13	*H1	R162	G4	R405	*H2	R730	D2	RB226	B4	RB526	*H3	TP2	D3
C56	*B4	C174	*G4	C504	*E4	C740	*C3	D204	A3	IC510	*H4	R14	*H1	R163	*G4	R406	*H2	R731	D2	RB227	A4	RB527	*H2	TP501	H4
C57	*D1	C175	*G4	C505	D5	C741	C4	D205	A3	IC513	*H2	R15	*H1	R164	*G4	R407	H2	R732	D2	RB229	B4	RB528	*H3	TP801	H3
C58	*B4	C176	*G4	C507	*E5	C742	*C3	D206	A3	IC514	*H3	R16	*H1	R165	*G4	R408	*G2	R733	C4	RB230	A4	RB529	*H3		
C59	*C4	C177	*G4	C508	*E4	C743	*C3	D207	A3	IC515	*G2	R17	*H1	R166	G4	R409	*H2	R734	*D3	RB231	*A4	RB530	*H3	X101	G3
C60	*D1	C178	*G4	C509	D5	C744	*C3	D208	A4	IC601	*B2	R18	*H1	R168	G4	R410	H2	R735	*D3	RB232	A4	RB531	*H3	X151	G4
C61	*C4	C179	*G4	C510	*E5	C745	*C3	D209	A4	IC602	B2	R19	*H1	R169	*G3	R411	*E1	R736	C4	RB233	*H4	RB532	*H3		
C62	*B4	C180	*G4	C511	*E5	C746	*C2	D210	A4	IC603	*C2	R20	*H1	R170	*G3	R412	*E1	R737	*B4	RB234	H4	RB533	*H2		
C63	*B4	C181	G3	C512	*E4	C747	*C3			IC604	C2	R21	*G1	R171	F3	R413	*E1	R738	C2	RB235	*H4	RB601	*B3		
C64	*D1	C182	G3	C513	*E4	C748	*C3	E1	B2	IC701	D2	R22	*G1	R172	G3	R417	*E1	R739	C4	RB236	*H4	RB602	*B2		
C65	*C4	C183	G3	C514	*E5	C749	*C3	E2	D3	IC702	D2	R23	*G1	R173	G3	R418	*F1	R740	D2	RB301	*A1	RB603	*B3		
C66	*C4	C184	G3	C515	E5	C750	*C3	E3	F3	IC703	D2	R24	*A4	R174	G3	R419	*H3	R741	D2	RB302	A1	RB604	*A2		
C67	*B4	C201	G5	C516	E5	C751	*C3	E4	*G3	IC803	H3	R25	*A4	R175	*G4	R420	*F1	R742	D2	RB401	*H2	RB605	*B2		
C68	*B4	C202	G5	C517	*H3	C752	*D2			IC809	*H3	R26	*A4	R177	*G4	R450	*C3	R743	D3	RB402	*H2	RB606	B3		
C69	*D1	C203	H4	C518	*H3	C753	B3	FB1	*C5	IC810	*H3	R27	*A4	R178	*G4	R451	*C3	R744	D3	RB403	*H2	RB607	B2		
C70	*D1	C204	H4	C519	*H3	C754	*C3	FB2	*C5	IC811	*G3	R28	*A4	R179	G3	R452	*C3	R751	D2	RB404	H2	RB608	B3		
C71	C4	C205	H4	C520	*H2	C755	*C3	FB3	*B5	IC812	*H3	R29	*A4	R180	G3	R453	*C3	R752	D2	RB405	H2	RB609	A2		
C72	B4	C206	A3	C521	*H3	C756	*C3	FB4	*B5	IC813	*G3	R30	*C4	R181	*G4	R454	D3	R753	D2	RB406	*H2	RB610	B2		
C73	D1	C207	A3	C522	*G3	C757	D2	FB5	*D1	IC814	*H3	R31	*B4	R182	*G4	R455	*D3	R754	D2	RB407	*H2	RB611	*B2		
C80	H5	C208	A4	C523	*H3	C758	D2	FB6	*D1	IC901	*H4	R32	*D1	R183	*G4	R456	*D3	R755	D2	RB408	*H2	RB612	*B2		
C81	H4	C209	A4	C601	A3	C759	D2	FB101	G3	IC911	E2	R33	*A5	R185	G3	R457	F3	R756	D2	RB409	*H2	RB613	*A2		
C82	H4	C210	*B3	C602	*A3	C801	H3	FB102	*F3	IC999	C3	R34	*A5	R186	G3	R458	F3	R801	H2	RB410	H2	RB614	*A2		
C83	J3	C211	A3	C603	A3	C802	H2	FB103	*G3			R35	*A5	R187	G3	R459	D3	R802	H2	RB411	*F1	RB615	*B3		
C84	*H3	C212	*A1	C604	*A3	C803	H3	FB104	*F3	JC1	*G1	R36	*C4	R188	G3	R460	*C3	R803	H3	RB412	*F1	RB616	*B2		
C85	J2	C213	*B1	C605	*A3	C804	H3	FB105	*G3			R37	*B4	R191	*G3	R461	*E2	R804	H3	RB413	*F1	RB617	*A2		
C86	J3	C214	*B1	C606	A2	C805	H3	FB106	*G2	L1	D4	R38	*D1	R192	*G4	R462	*E2	R807	H3	RB414	*F1	RB618	*A3		
C87	G2	C215	*C1	C607	*A2	C806	H3	FB107	*G2	L2	B4	R40	*C4	R201	G5	R463	*E3	R808	H3	RB415	*F1	RB619	B2		
C88	D5	C216	*H4	C608	A2	C821	*H3	FB108	*G3	L3	D1	R41	*C4	R202	G4	R470	*F3	R809	H3	RB416	*F1	RB620	B3		
C89	C5	C217	*H4	C609	*A2	C822	*G3	FB109	*G2	L4	B4	R42	*C4	R203	*H4	R501	*H4	R810	H3	RB417	*F1	RB621	A3		
C90	C1	C218	*H4	C610	A2	C823	*G3	FB151	G4	L5	D1	R43	*B4	R204	*H4	R502	*H3	R811	H3	RB418	*F1	RB622	A2		
C91	*H3	C219	A2	C611	*B2	C824	*H3	FB152	*F4	L6	D4	R44	*B4	R205	*H4	R503	*H3	R812	H3	RB419	*F1	RB623	B2		
C92	*D2	C250	G5	C612	B3	C825	*G3	FB153	*G4	L80	H5	R45	*B4	R206	*H4	R504	*H3	R813	H3	RB420	*F2	RB624	B2		
C93	D4	C251	G5	C613	*B2	C826	*G3	FB154	*F4	L81	H4	R46	*D1	R207	G5	R505	H4	R814	H3	RB421	*F2	RB625	A2		
C94	A3	C310	A1	C614	B2	C901	*H4	FB155	*G4	L201	G5	R47	*D1	R208	*A2	R506	*H3	R832	H2	RB422	*F2	RB626	A2		
C101	G3	C401	J1	C615	*B3	C911	*E2	FB156	*G4	L202	*A4	R48	*D1	R209	*A2	R507	E4	R855	*G3	RB423	H2	RB627	*B2		
C102	G3	C402	*H2	C616	B2	C912	*E2	FB157	*G4	L203	*A4	R49	*C4	R210	*A2	R508	E4	R856	*H3	RB424	*E2	RB628	*C2		
C103	G3	C403	*H2	C617	C1	C913	*F2	FB158	*G4	L401	*E1	R50	*B4	R211	*A2	R509	*D4	R857	*G3	RB425	*E2	RB629	*B2		
C104	G3	C404	H2	C618	*C1	C914	*F3	FB159	*G3	L402	*D2	R51	*D1	R212	*A2	R510	*E4	R858	*H3	RB426	*E2	RB630	*C1		
C105	G3	C405	*G2	C619	C1	C915	*E3	FB501	D4	L403	*F2	R52	*C4	R213	*A2	R512	*D4	R859	*G3	RB427	*E2	RB631	*C2		
C106	G3	C406	*G2	C620	*C1	C916	*F3	FB502	D4	L450	*F4	R53	*B4	R214	*A3	R514	*D4	R860	*G3	RB428	*E2	RB632	B2		
C107	*G3	C407	H2	C621	*B1	C917	*F2	FB801	H2	L451	F4	R54	*D1	R215	*A3	R515	*E4	R861	H3	RB450	E3	RB633	C2		
C108	*G2	C408	*D2	C622	C1	C918	*F2	FB802	H2	L452	E3	R55	*A4	R216	*A3	R516	*E4	R862	*H2	RB451	E3	RB634	B2		
C109	*G3	C409	*E1	C623	*C1	C919	*E2			L501	*H3	R56	*A5	R217	*A3	R517	*E4	R901	*F3	RB452	E2	RB635	C1		
C110	*G3	C410	*E2	C624	C1	C920	*F2	FL501	E4	L502	D4	R57	*C4	R218	*A3	R518	*E4	R902	*F2	RB453	E2	RB636	C2		

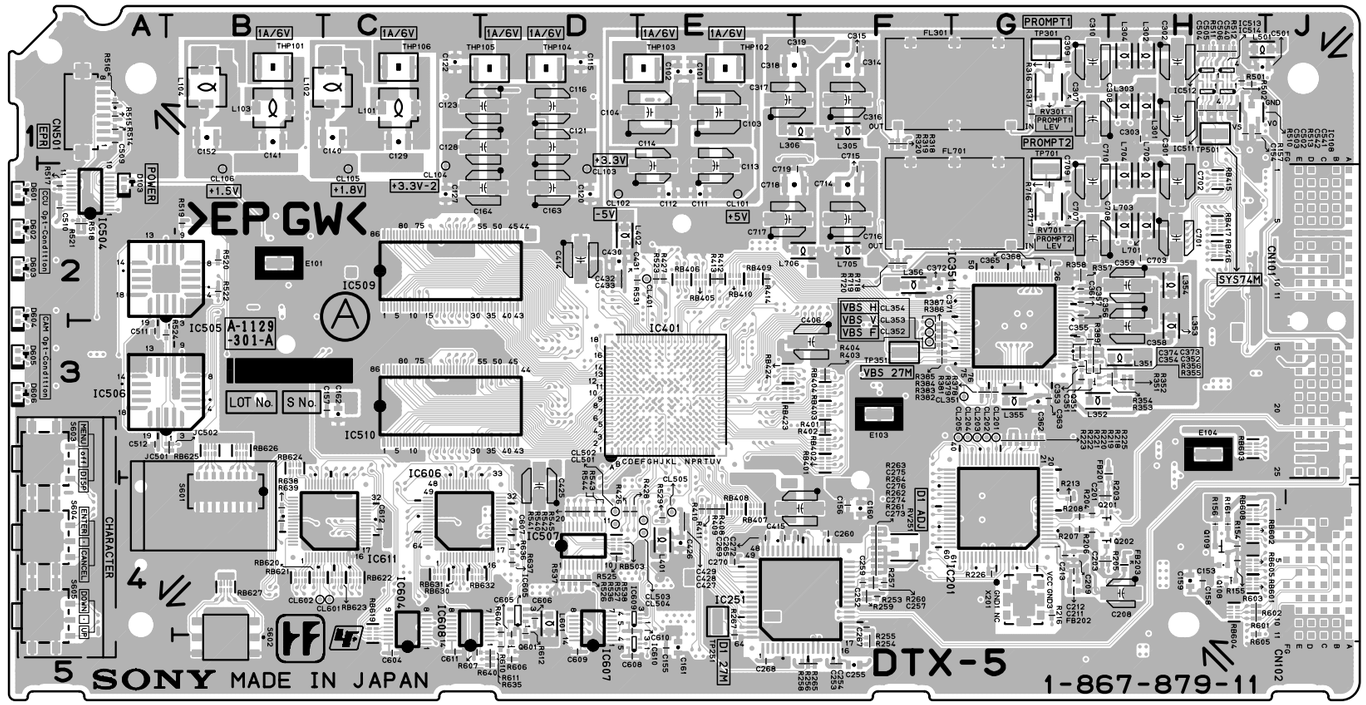

DTX-5 -A SIDE-
SUFFIX: -11, 31

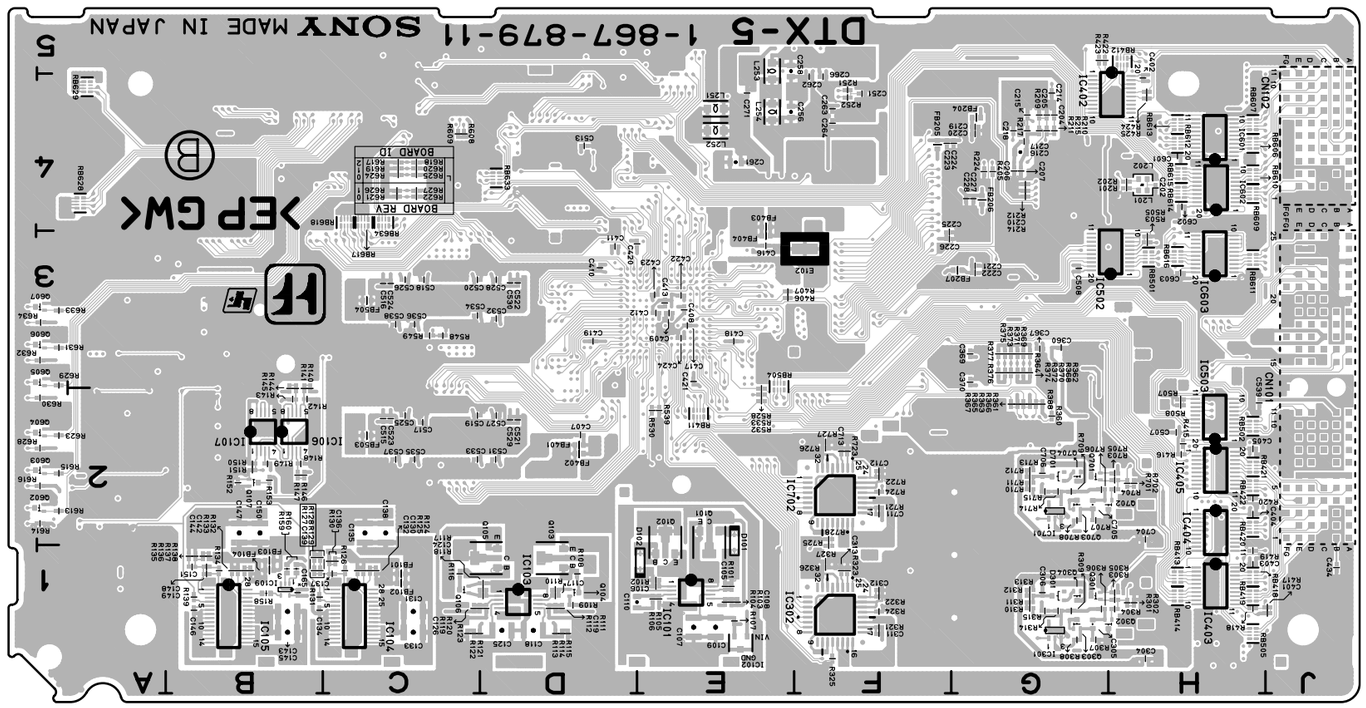

DTX-5 -B SIDE-
SUFFIX: -11, 31

DTX-5 (1-867-879-11, 31)
---

*:B SIDE

C101	E1	C226	*F3	C421	*E3	CL104	C2	IC511	H1	R109	*D1	R262	F4	R423	*G5	R703	*H2	RV251	F4
C102	E1	C227	*G4	C422	*E3	CL105	C2	IC512	H1	R110	*D1	R263	F4	R424	*H4	R704	*H2	RV301	G1
C103	E1	C228	*G4	C423	*E3	CL106	B2	IC513	H1	R111	*D1	R264	F4	R425	*H4	R705	*H2	RV701	G2
C104	E1	C251	*F4	C424	*E3	CL201	G3	IC514	H1	R112	*D1	R265	F5	R426	D4	R706	*G2		
C105	*E1	C252	F4	C425	D4	CL202	G3	IC601	*H4	R113	*D1	R267	E5	R427	E2	R707	*G2	S601	B4
C106	*E1	C253	F5	C426	E4	CL203	G3	IC602	*H4	R114	*D1	R301	*H1	R428	D4	R708	*G2	S602	B5
C107	*E1	C254	F5	C427	E4	CL204	G3	IC603	*H3	R115	*D1	R302	*H1	R501	H1	R709	*G2	S603	A3
C108	*E1	C255	F5	C428	E4	CL205	G3	IC604	C5	R116	*C1	R303	*H1	R502	H1	R710	*G2	S604	A4
C109	*E1	C256	*E4	C429	E4	CL351	G3	IC605	D4	R117	*D1	R304	*H1	R503	*H3	R711	*G2	S605	A4
C110	*D1	C257	F4	C430	D2	CL352	F3	IC606	C4	R118	*D1	R305	*H1	R505	*H3	R712	*G2		
C111	E2	C258	*E5	C431	D2	CL353	F3	IC607	D5	R119	*C1	R306	*G1	R507	*H2	R713	*G2	THP101	B1
C112	E2	C259	F4	C432	D2	CL354	F3	IC608	D5	R120	*D1	R307	*G1	R508	*H2	R714	*G2	THP102	E1
C113	E2	C260	F4	C433	D2	CL401	E2	IC609	D4	R121	*C1	R308	*G1	R510	H1	R715	*G2	THP103	E1
C114	E2	C261	*E4	C434	*J1	CL501	D4	IC610	D5	R122	*C1	R309	*G1	R511	H1	R716	G2	THP104	D1
C115	D1	C262	*F4	C501	H1	CL502	D4	IC611	C4	R123	*C1	R310	*G1	R512	H1	R717	G2	THP105	D1
C116	D1	C263	*F4	C502	H1	CL503	E4	IC701	*G2	R124	*C1	R311	*G1	R513	H1	R718	F2	THP106	C1
C117	*D1	C264	*F4	C503	H1	CL504	E4	IC702	*F2	R125	*C1	R312	*G1	R514	A1	R719	F2		
C118	*D1	C265	E4	C504	H1	CL505	E4			R126	*C1	R313	*G1	R515	A1	R720	F2	TP251	E4
C119	*D1	C266	*F4	C505	H1	CL601	C4	JC501	B3	R127	*B1	R314	*G1	R516	A1	R721	*F2	TP301	G1
C120	D2	C267	F4	C506	H1	CL602	B4	JC502	B3	R128	*B1	R315	*G1	R517	A2	R722	*F2	TP351	F3
C121	D1	C268	E5	C507	*H2					R129	*B1	R316	G1	R518	A2	R723	*F2	TP501	H1
C122	C1	C269	E4	C508	*G3	CN101	J3	L101	C1	R130	*C1	R317	G1	R519	B2	R724	*F2	TP701	G2
C123	D1	C270	E4	C509	A1	CN102	J5	L102	C1	R131	*B1	R318	F1	R520	B2	R725	*F1		
C124	*D1	C271	*E4	C510	A2	CN501	A1	L103	B1	R132	*B1	R319	F1	R521	A2	R726	*F2	X201	G4
C125	*D1	C272	F4	C511	A3			L104	B1	R133	*B1	R320	F1	R522	B2	R727	*F2		
C126	*C1	C273	F4	C512	A3	D101	*E2	L201	*H4	R134	*B1	R321	*F1	R523	E2	R728	*F2		
C127	C2	C274	F4	C513	*D4	D102	*E1	L202	*H4	R135	*B1	R322	*F1	R524	A3				
C128	D1	C275	F4	C515	*C2	D103	A2	L251	*E4	R136	*B1	R323	*F1	R525	D4	RB401	F3		
C129	C1	C276	F4	C516	*C3	D301	*G1	L252	*E4	R137	*B1	R324	*F1	R526	D4	RB402	F3		
C130	*C1	C301	H1	C517	*C2	D601	A2	L253	*E5	R138	*B1	R325	*F1	R527	D4	RB403	F3		
C131	*C1	C302	H1	C518	*C3	D602	A2	L254	*E4	R139	*B1	R326	*F1	R528	*E2	RB404	F3		
C132	*C1	C303	H1	C519	*C2	D603	A2	L301	H1	R140	*B2	R327	*F1	R529	E4	RB405	E2		
C133	*C1	C304	*H1	C520	*C3	D604	A2	L302	H1	R141	*B2	R351	H3	R530	*E2	RB406	E2		
C134	*B1	C305	*G1	C521	*D2	D605	A3	L303	H1	R142	*B2	R352	H3	R531	D2	RB407	E4		
C135	*C2	C306	*G1	C522	*D3	D606	A3	L304	H1	R143	*B2	R353	H3	R532	*E2	RB408	E4		
C136	*C1	C307	G1	C523	*C2	D701	*G2	L305	F1	R144	*B2	R354	H3	R533	*E2	RB409	E2		
C137	*C1	C308	G1	C524	*C3			L306	F1	R145	*B2	R355	G3	R536	D4	RB410	E2		
C138	*C2	C309	G1	C525	*C2	E101	B2	L351	H3	R146	*B2	R356	G3	R537	D4	RB411	*E2		
C139	*B1	C310	G1	C526	*C3	E102	*F3	L352	G3	R147	*B2	R357	G2	R538	D4	RB412	*H5		
C140	C1	C311	*F1	C527	*D2	E103	F3	L353	H3	R148	*B2	R358	G2	R539	*E2	RB413	*H1		
C141	B1	C312	*F1	C528	*D3	E104	H3	L354	H2	R149	*B2	R360	*G2	R540	D4	RB414	*H1		
C142	*B1	C313	*F1	C529	*D2			L355	G3	R150	*B2	R361	*G2	R541	D4	RB415	H2		
C143	*B1	C314	F1	C530	*D3	FB101	*C1	L356	F2	R151	*B2	R362	*G3	R542	D4	RB416	H2		
C144	*B1	C315	F1	C531	*D2	FB102	*C1	L401	E4	R152	*B2	R363	*G2	R543	D4	RB417	H2		
C145	*B1	C316	F1	C532	*D3	FB103	*B1	L402	D2	R153	*B2	R364	*G3	R544	D4	RB418	*H1		
C146	*B1	C317	E1	C533	*C2	FB104	*B1	L501	H1	R154	H4	R365	*G2	R545	D4	RB419	*H1		
C147	*B2	C318	E1	C534	*C3	FB201	G3	L601	D4	R155	H4	R366	*G2	R548	*C3	RB420	*H2		
C148	*B1	C319	F1	C535	*C2	FB202	G4	L701	H2	R156	H4	R367	*G2	R549	*C3	RB421	*H2		
C149	*B1	C351	G3	C536	*C3	FB203	H4	L702	H2	R157	H1	R368	*G3	R601	H4	RB422	*H2		
C150	*B2	C352	G3	C537	*C2	FB204	*G4	L703	H2	R158	*B1	R369	*G3	R602	H4	RB423	E3		
C151	*B1	C353	G3	C538	*C3	FB205	*F4	L704	H2	R159	*B1	R370	*G3	R603	H4	RB424	E3		
C152	B1	C354	G3	C539	*H2	FB206	*G4	L705	F2	R160	*B1	R371	*G3	R604	D4	RB501	*H3		
C153	H4	C355	G3	C540	H1	FB207	*G3	L706	F2	R161	H4	R372	*G3	R605	H4	RB502	*H2		
C154	H1	C356	G2	C541	H1	FB401	*D2			R201	*H4	R373	*G3	R606	D5	RB503	D4		
C155	E5	C357	G2	C542	H1	FB402	*D2	Q101	*E2	R202	*H4	R374	*G3	R607	C5	RB504	*E3		
C156	F4	C358	H3	C601	*H4	FB403	*E4	Q102	*E2	R203	G4	R375	*G3	R608	*C4	RB505	*H1		
C157	C3	C359	H2	C602	*H4	FB404	*E3	Q103	*D1	R204	G4	R376	*G3	R609	*C4	RB601	H4		
C158	H4	C360	*G3	C603	*H3	FB503	*C2	Q104	*D1	R205	G4	R377	*G3	R610	D5	RB602	H4		
C159	H4	C361	G2	C604	C5	FB504	*C3	Q105	*D1	R206	G4	R378	G3	R611	D5	RB603	H3		
C160	F4	C362	G3	C605	D4			Q106	*C1	R207	G4	R379	G3	R612	D4	RB604	H4		
C161	E5	C363	G3	C606	D4	FL301	G1	Q107	*B2	R208	G4	R381	G3	R613	*A2	RB605	H4		
C162	C3	C365	G2	C607	D4	FL701	G2	Q108	H4	R209	*G4	R382	F3	R614	*A2	RB606	*H4		
C163	D2	C367	*G3	C608	D5			Q109	H4	R210	*G4	R383	F3	R615	*A2	RB607	*H4		
C164	D2	C368	G2	C609	D5	IC101	*E1	Q201	G4	R211	*G4	R384	F3	R616	*A2	RB608	H4		
C165	*B1	C369	*G3	C610	D4	IC102	*E1	Q202	G4	R212	*G4	R385	F3	R617	*C4	RB609	*H4		
C201	G4	C370	*G3	C611	C5	IC103	*D1	Q301	*G1	R213	G4	R386	F3	R618	*C4	RB610	*H4		
C202	*H4	C371	F2	C612	C4	IC104	*C1	Q302	*G1	R214	*G4	R387	F3	R619	*C4	RB611	*H3		
C203	G4	C372	F2	C701	H2	IC105	*B1	Q303	*G1	R215	*G4	R388	*G2	R620	*C4	RB612	*H4		
C204	*G4	C373	G3	C702	H2	IC106	*B2	Q304	*G1	R216	G4	R389	G3	R621	*C4	RB613	*H4		
C205	*G4	C374	G3	C703	H2	IC107	*B2	Q351	G3	R217	*G4	R401	F3	R622	*C4	RB614	*H4		
C206	*G4	C401	*J1	C704	*H2	IC108	H1	Q601	D5	R218	G3	R402	F3	R623	*A2	RB615	*H4		
C207	*G4	C402	*H4	C705	*G2	IC109	*B1	Q602	*A2	R219	G3	R403	F3	R624	*C4	RB616	*H3		
C208	H4	C403	*H1	C706	*G2	IC201	G4	Q603	*A2	R220	G3	R404	F3	R625	*C4	RB617	*C4		
C209	G4	C404	*H2	C707	G2	IC251	F4	Q604	*A2	R221	G3	R405	*G4	R626	*C4	RB618	*C4		
C210	*G4	C405	*H2	C708	G2	IC301	*G1	Q605	*A3	R222	G3	R406	*E3	R627	*C4	RB619	C4		
C211	G4	C406	F3	C709	G2	IC302	*F1	Q606	*A3	R223	G3	R407	*E3	R628	*A2	RB620	B4		
C212	G4	C407	*D2	C710	G2	IC351	G3	Q607	*A3	R224	*G4	R408	E4	R629	*A3	RB621	B4		
C213	G4	C408	*E3	C711	*F2	IC401	E3	Q701	*G2	R225	G3	R409	E4	R630	*A2	RB622	C4		
C214	*G4	C409	*E3	C712	*F2	IC402	*G4	Q702	*G2	R226	G4	R410	E4	R631	*A3	RB623	C4		
C215	*G4	C410	*D3	C713	*F2	IC403	*H1	Q703	*G2	R251	*F4	R411	E4	R632	*A3	RB624	B3		
C216	*G4	C411	*D3	C714	F2	IC404	*H2	Q704	*G2	R252	*F4	R412	E2	R633	*A3	RB625	B3		
C217	*G4	C412	*E3	C715	F2	IC405	*H2			R253	F4	R413	E2	R634	*A3	RB626	B3		
C218	*G4	C413	*E3	C716	F2	IC502	*H3	R101	*E1	R254	F5	R414	E2	R635	D5	RB627	B4		
C219	*G4	C414	D2	C717	E2	IC503	*H2	R102	*E1	R255	F5	R415	*H2	R636	D4	RB628	*A4		
C220	*G4	C415	F4	C718	E2	IC504	A2	R103	*E1	R256	F5	R416	*H2	R637	D4	RB629	*A4		
C221	*G3	C416	*E3	C719	F2	IC505	A2	R104	*E1	R257	F4	R417	*J1	R638	B4	RB630	C4		
C222	*G3	C417	*E3			IC506	A3	R105	*E1	R258	F5	R418	*H1	R639	B4	RB631	C4		
C223	*F4	C418	*E3	CL101	E2	IC507	D4	R106	*E1	R259	F4	R419	*H1	R640	D5	RB632	C4		
C224	*G4	C419	*D3	CL102	D2	IC509	C2	R107	*E1	R260	F4	R420	*H2	R701	*H2	RB633	*D4		
C225	*F3	C420	*D3	CL103	D2	IC510	C3	R108	*D1	R261	F4	R422	*G5	R702	*H2	RB634	*C4		

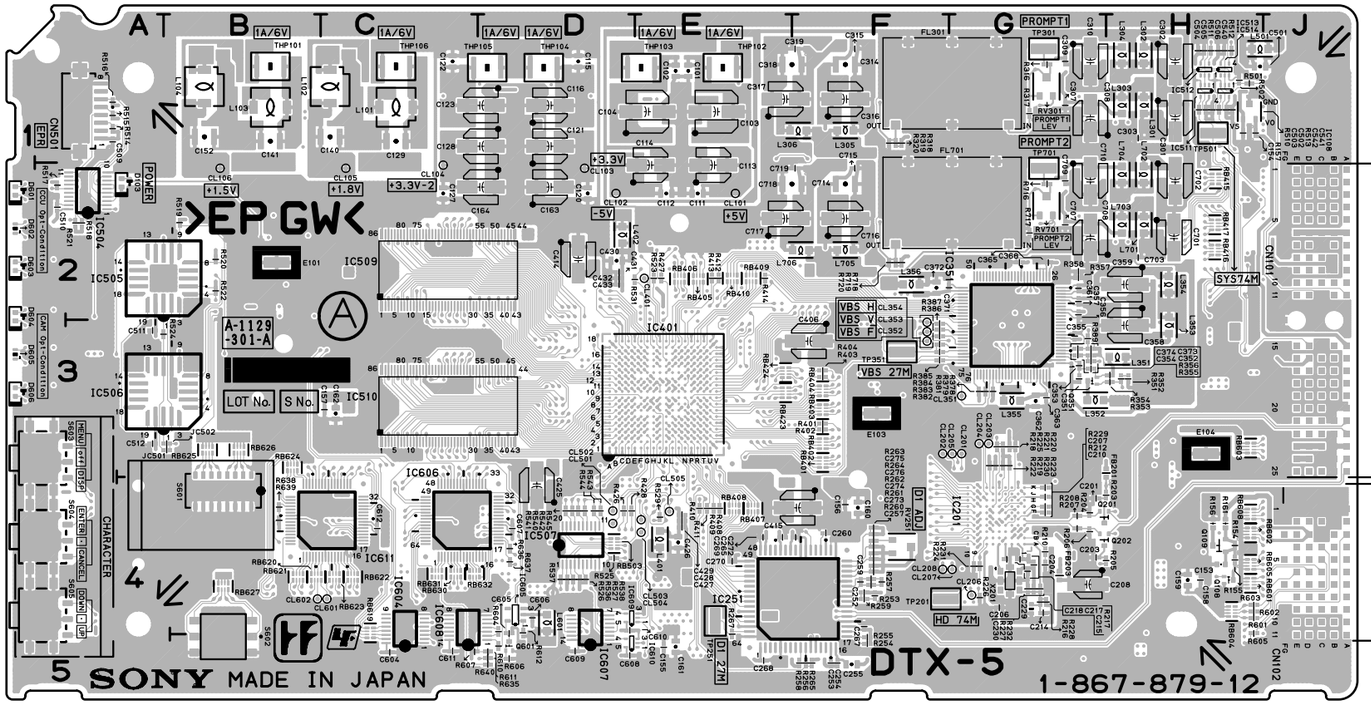

DTX-5 -A SIDE-
SUFFIX: -12, 32

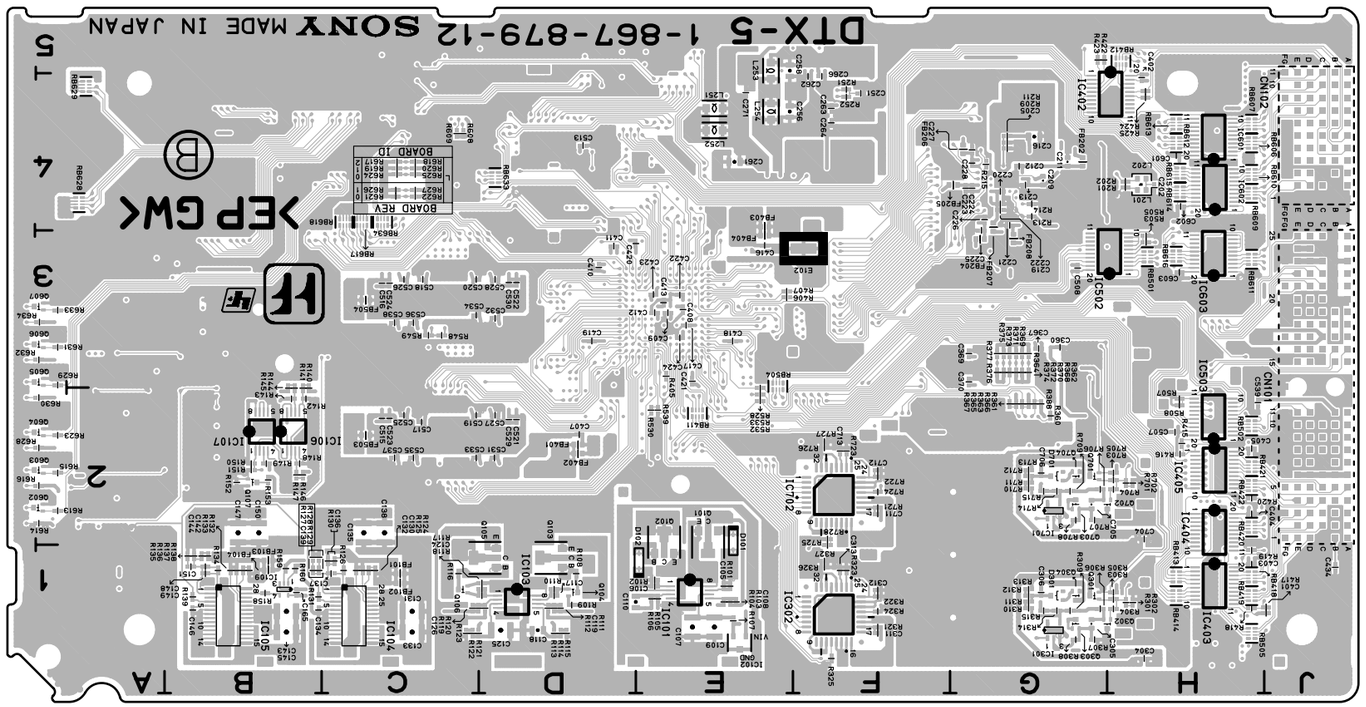

DTX-5 -B SIDE-
SUFFIX: -12, 32

DTX-5 (1-867-879-12, 32)
---
*:B SIDE

C101	E1																		
C102	E1	C227	*G4	C420	*D3	CL103	D2	IC505	A2	R104	*E1	R251	*F4	R411	E4	R632	*A3	RB624	B3
C103	E1	C228	*G4	C421	*E3	CL104	C2	IC506	A3	R105	*E1	R252	*F4	R412	E2	R633	*A3	RB625	B3
C104	E1	C229	G4	C422	*E3	CL105	C2	IC507	D4	R106	*E1	R253	F4	R413	E2	R634	*A3	RB626	B3
C105	*E1	C230	G4	C423	*E3	CL106	B2	IC509	C2	R107	*E1	R254	F5	R414	E2	R635	D5	RB627	B4
C106	*E1	C251	*F4	C424	*E3	CL201	G3	IC510	C3	R108	*D1	R255	F5	R415	*H2	R636	D4	RB628	*A4
C107	*E1	C252	F4	C425	D4	CL202	F3	IC511	H1	R109	*D1	R256	F5	R416	*H2	R637	D4	RB629	*A4
C108	*E1	C253	F5	C426	E4	CL203	G3	IC512	H1	R110	*D1	R257	F4	R417	*J1	R638	B4	RB630	C4
C109	*E1	C254	F5	C427	E4	CL204	G3	IC513	H1	R111	*D1	R258	F5	R418	*H1	R639	B4	RB631	C4
C110	*D1	C255	F5	C428	E4	CL205	G3	IC514	H1	R112	*D1	R259	F4	R419	*H1	R640	D5	RB632	C4
C111	E2	C256	*E4	C429	E4	CL206	G4	IC601	*H4	R113	*D1	R260	F4	R420	*H2	R701	*H2	RB633	*D4
C112	E2	C257	F4	C430	D2	CL207	G4	IC602	*H4	R114	*D1	R261	F4	R422	*G5	R702	*H2	RB634	*C4
C113	E2	C258	*E5	C431	D2	CL208	F4	IC603	*H3	R115	*D1	R262	F4	R423	*G5	R703	*H2		
C114	E2	C259	F4	C432	D2	CL351	G3	IC604	C5	R116	*C1	R263	F4	R424	*H4	R704	*H2	RV251	F4
C115	D1	C260	F4	C433	D2	CL352	F3	IC605	D4	R117	*D1	R264	F4	R425	*H4	R705	*H2	RV301	G1
C116	D1	C261	*E4	C434	*J1	CL353	F3	IC606	C4	R118	*D1	R265	F5	R426	D4	R706	*G2	RV701	G2
C117	*D1	C262	*F4	C501	H1	CL354	F3	IC607	D5	R119	*C1	R267	E5	R427	E2	R707	*G2		
C118	*D1	C263	*F4	C502	H1	CL401	E2	IC608	D5	R120	*D1	R301	*H1	R428	D4	R708	*G2	S601	B4
C119	*D1	C264	*F4	C503	H1	CL501	D4	IC609	D4	R121	*C1	R302	*H1	R501	H1	R709	*G2	S602	B5
C120	D2	C265	E4	C504	H1	CL502	D4	IC610	D5	R122	*C1	R303	*H1	R502	H1	R710	*G2	S603	A3
C121	D1	C266	*F4	C505	H1	CL503	E4	IC611	C4	R123	*C1	R304	*H1	R503	*H3	R711	*G2	S604	A4
C122	C1	C267	F4	C506	H1	CL504	E4	IC701	*G2	R124	*C1	R305	*H1	R505	*H3	R712	*G2	S605	A4
C123	D1	C268	E5	C507	*H2	CL505	E4	IC702	*F2	R125	*C1	R306	*G1	R507	*H2	R713	*G2		
C124	*D1	C269	E4	C508	*G3	CL601	C4			R126	*C1	R307	*G1	R508	*H2	R714	*G2	THP101	B1
C125	*D1	C270	E4	C509	A1	CL602	B4	JC501	B3	R127	*B1	R308	*G1	R510	H1	R715	*G2	THP102	E1
C126	*C1	C271	*E4	C510	A2			JC502	B3	R128	*B1	R309	*G1	R511	H1	R716	G2	THP103	E1
C127	C2	C272	F4	C511	A3	CN101	J3			R129	*B1	R310	*G1	R512	H1	R717	G2	THP104	D1
C128	D1	C273	F4	C512	A3	CN102	J5	L101	C1	R130	*C1	R311	*G1	R513	H1	R718	F2	THP105	D1
C129	C1	C274	F4	C513	*D4	CN501	A1	L102	C1	R131	*B1	R312	*G1	R514	A1	R719	F2	THP106	C1
C130	*C1	C275	F4	C515	*C2			L103	B1	R132	*B1	R313	*G1	R515	A1	R720	F2		
C131	*C1	C276	F4	C516	*C3	D101	*E2	L104	B1	R133	*B1	R314	*G1	R516	A1	R721	*F2	TP201	F4
C132	*C1	C301	H1	C517	*C2	D102	*E1	L201	*H4	R134	*B1	R315	*G1	R517	A2	R722	*F2	TP251	E4
C133	*C1	C302	H1	C518	*C3	D103	A2	L202	*H4	R135	*B1	R316	G1	R518	A2	R723	*F2	TP301	G1
C134	*B1	C303	H1	C519	*C2	D301	*G1	L251	*E4	R136	*B1	R317	G1	R519	B2	R724	*F2	TP351	F3
C135	*C2	C304	*H1	C520	*C3	D601	A2	L252	*E4	R137	*B1	R318	F1	R520	B2	R725	*F1	TP501	H1
C136	*C1	C305	*G1	C521	*D2	D602	A2	L253	*E5	R138	*B1	R319	F1	R521	A2	R726	*F2	TP701	G2
C137	*C1	C306	*G1	C522	*D3	D603	A2	L254	*E4	R139	*B1	R320	F1	R522	B2	R727	*F2		
C138	*C2	C307	G1	C523	*C2	D604	A2	L301	H1	R140	*B2	R321	*F1	R523	E2	R728	*F2	X201	G4
C139	*B1	C308	G1	C524	*C3	D605	A3	L302	H1	R141	*B2	R322	*F1	R524	A3				
C140	C1	C309	G1	C525	*C2	D606	A3	L303	H1	R142	*B2	R323	*F1	R525	D4	RB401	F3		
C141	B1	C310	G1	C526	*C3	D701	*G2	L304	H1	R143	*B2	R324	*F1	R526	D4	RB402	F3		
C142	*B1	C311	*F1	C527	*D2			L305	F1	R144	*B2	R325	*F1	R527	D4	RB403	F3		
C143	*B1	C312	*F1	C528	*D3	E101	B2	L306	F1	R145	*B2	R326	*F1	R528	*E2	RB404	F3		
C144	*B1	C313	*F1	C529	*D2	E102	*F3	L351	H3	R146	*B2	R327	*F1	R529	E4	RB405	E2		
C145	*B1	C314	F1	C530	*D3	E103	F3	L352	G3	R147	*B2	R351	H3	R530	*E2	RB406	E2		
C146	*B1	C315	F1	C531	*D2	E104	H3	L353	H3	R148	*B2	R352	H3	R531	D2	RB407	E4		
C147	*B2	C316	F1	C532	*D3			L354	H2	R149	*B2	R353	H3	R532	*E2	RB408	E4		
C148	*B1	C317	E1	C533	*C2	FB101	*C1	L355	G3	R150	*B2	R354	H3	R533	*E2	RB409	E2		
C149	*B1	C318	E1	C534	*C3	FB102	*C1	L356	F2	R151	*B2	R355	G3	R536	D4	RB410	E2		
C150	*B2	C319	F1	C535	*C2	FB103	*B1	L401	E4	R152	*B2	R356	G3	R537	D4	RB411	*E2		
C151	*B1	C351	G3	C536	*C3	FB104	*B1	L402	D2	R153	*B2	R357	G2	R538	D4	RB412	*H5		
C152	B1	C352	G3	C537	*C2	FB201	G3	L501	H1	R154	H4	R358	G2	R539	*E2	RB413	*H1		
C153	H4	C353	G3	C538	*C3	FB202	*G4	L601	D4	R155	H4	R360	*G2	R540	D4	RB414	*H1		
C154	H1	C354	G3	C539	*H2	FB203	G4	L701	H2	R156	H4	R361	*G2	R541	D4	RB415	H2		
C155	E5	C355	G3	C540	H1	FB204	*G3	L702	H2	R157	H1	R362	*G3	R542	D4	RB416	H2		
C156	F4	C356	G2	C541	H1	FB205	*G4	L703	H2	R158	*B1	R363	*G2	R543	D4	RB417	H2		
C157	C3	C357	G2	C542	H1	FB206	*G4	L704	H2	R159	*B1	R364	*G3	R544	D4	RB418	*H1		
C158	H4	C358	H3	C601	*H4	FB207	*G4	L705	F2	R160	*B1	R365	*G2	R545	D4	RB419	*H1		
C159	H4	C359	H2	C602	*H4	FB208	*G3	L706	F2	R161	H4	R366	*G2	R548	*C3	RB420	*H2		
C160	F4	C360	*G3	C603	*H3	FB401	*D2			R201	*H4	R367	*G2	R549	*C3	RB421	*H2		
C161	E5	C361	G2	C604	C5	FB402	*D2	Q101	*E2	R202	*H4	R368	*G3	R601	H4	RB422	*H2		
C162	C3	C362	G3	C605	D4	FB403	*E4	Q102	*E2	R203	G4	R369	*G3	R602	H4	RB423	E3		
C163	D2	C363	G3	C606	D4	FB404	*E3	Q103	*D1	R204	G4	R370	*G3	R603	H4	RB424	E3		
C164	D2	C365	G2	C607	D4	FB503	*C2	Q104	*D1	R205	G4	R371	*G3	R604	D4	RB501	*H3		
C165	*B1	C367	*G3	C608	D5	FB504	*C3	Q105	*D1	R206	G4	R372	*G3	R605	H4	RB502	*H2		
C201	G4	C368	G2	C609	D5			Q106	*C1	R207	G4	R373	*G3	R606	D5	RB503	D4		
C202	*H4	C369	*G3	C610	D4	FL301	G1	Q107	*B2	R208	G4	R374	*G3	R607	C5	RB504	*E3		
C203	G4	C370	*G3	C611	C5	FL701	G2	Q108	H4	R209	*G4	R375	*G3	R608	*C4	RB505	*H1		
C204	G4	C371	F2	C612	C4			Q109	H4	R210	G4	R376	*G3	R609	*C4	RB601	H4		
C205	*G4	C372	F2	C701	H2	IC101	*E1	Q201	G4	R211	*G4	R377	*G3	R610	D5	RB602	H4		
C206	G4	C373	G3	C702	H2	IC102	*E1	Q202	G4	R212	G4	R378	G3	R611	D5	RB603	H3		
C207	G4	C374	G3	C703	H2	IC103	*D1	Q301	*G1	R213	*G4	R379	G3	R612	D4	RB604	H4		
C208	G4	C401	*J1	C704	*H2	IC104	*C1	Q302	*G1	R214	*G4	R381	G3	R613	*A2	RB605	H4		
C209	*G4	C402	*H4	C705	*G2	IC105	*B1	Q303	*G1	R215	*G4	R382	F3	R614	*A2	RB606	*H4		
C210	G4	C403	*H1	C706	*G2	IC106	*B2	Q304	*G1	R216	G4	R383	F3	R615	*A2	RB607	*H4		
C211	*G4	C404	*H2	C707	G2	IC107	*B2	Q351	G3	R217	G4	R384	F3	R616	*A2	RB608	H4		
C212	*G4	C405	*H2	C708	G2	IC108	H1	Q601	D5	R218	G3	R385	F3	R617	*C4	RB609	*H4		
C213	*G4	C406	F3	C709	G2	IC109	*B1	Q602	*A2	R219	G3	R386	F3	R618	*C4	RB610	*H4		
C214	G4	C407	*D2	C710	G2	IC201	G4	Q603	*A2	R220	G3	R387	F3	R619	*C4	RB611	*H3		
C215	G4	C408	*E3	C711	*F2	IC251	F4	Q604	*A2	R221	G3	R388	*G2	R620	*C4	RB612	*H4		
C216	*G4	C409	*E3	C712	*F2	IC301	*G1	Q605	*A3	R222	G3	R389	G3	R621	*C4	RB613	*H4		
C217	G4	C410	*D3	C713	*F2	IC302	*F1	Q606	*A3	R223	G3	R401	F3	R622	*C4	RB614	*H4		
C218	G4	C411	*D3	C714	F2	IC351	G3	Q607	*A3	R224	G4	R402	F3	R623	*A2	RB615	*H4		
C219	*G4	C412	*E3	C715	F2	IC401	E3	Q701	*G2	R225	G3	R403	F3	R624	*C4	RB616	*H3		
C220	*G4	C413	*E3	C716	F2	IC402	*G4	Q702	*G2	R226	G4	R404	F3	R625	*C4	RB617	*C4		
C221	*G4	C414	D2	C717	E2	IC403	*H1	Q703	*G2	R227	G4	R405	*E3	R626	*C4	RB618	*C4		
C222	*G4	C415	F4	C718	E2	IC404	*H2	Q704	*G2	R228	G4	R406	*E3	R627	*C4	RB619	C4		
C223	*G4	C416	*E3	C719	F2	IC405	*H2			R229	G4	R407	*E3	R628	*A2	RB620	B4		
C224	*G4	C417	*E3			IC502	*H3	R101	*E1	R230	G3	R408	E4	R629	*A3	RB621	B4		
C225	*G4	C418	*E3	CL101	E2	IC503	*H2	R102	*E1	R231	G4	R409	E4	R630	*A2	RB622	C4		
C226	*G4	C419	*D3	CL102	D2	IC504	A2	R103	*E1	R232	G4	R410	E4	R631	*A3	RB623	C4		

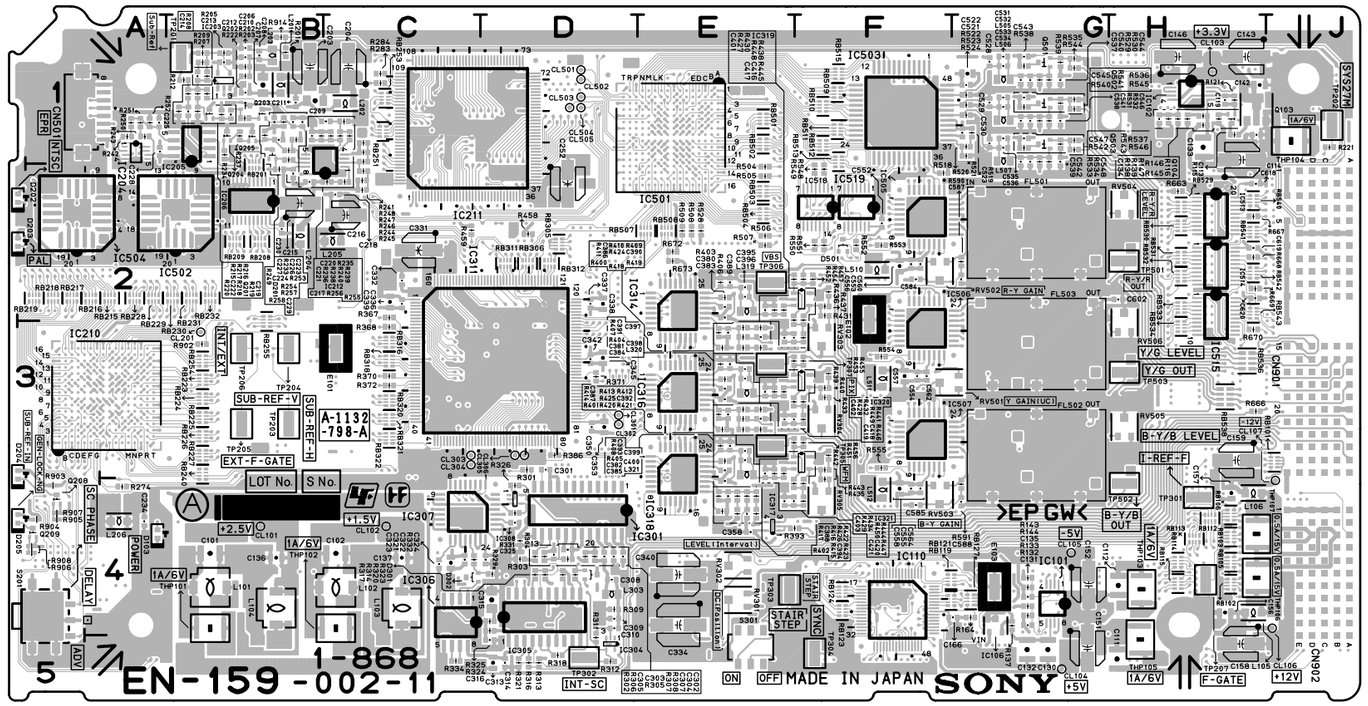

EN-159A
EN-159B -A SIDE-
SUFFIX: -11

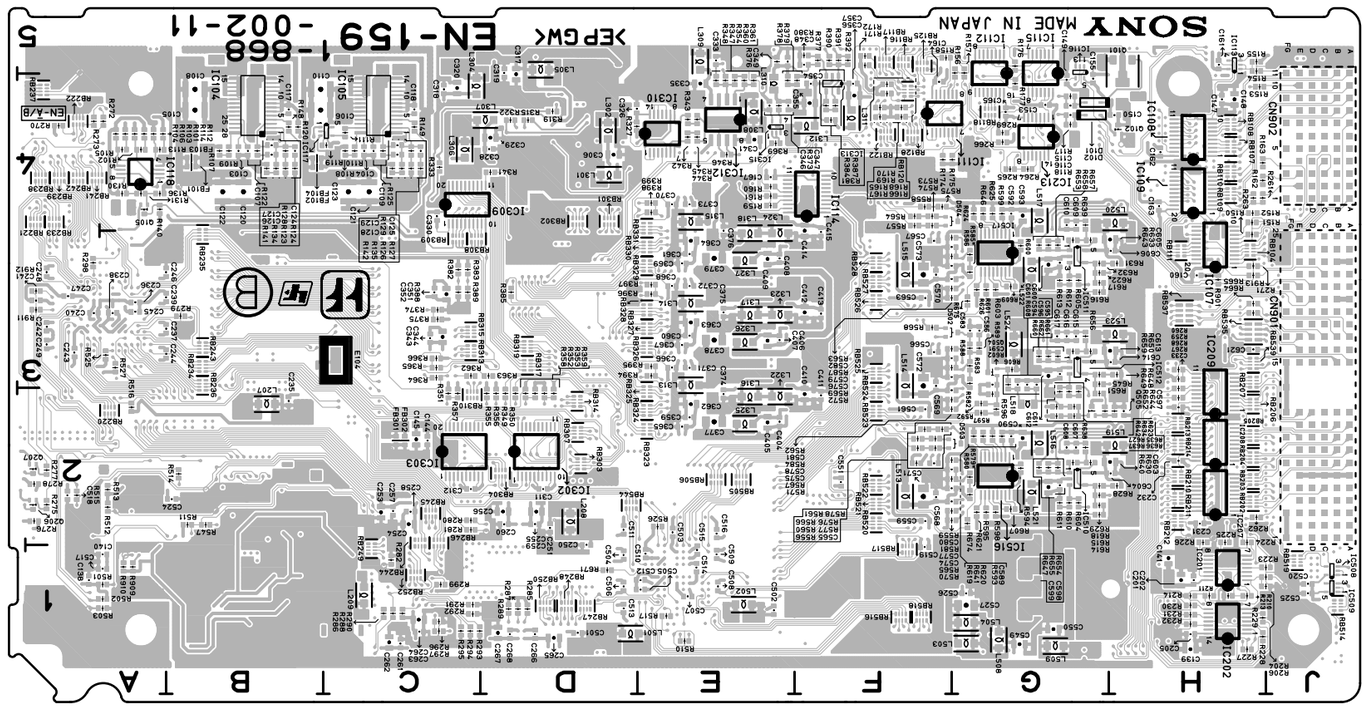

EN-159A
EN-159B -B SIDE-
SUFFIX: -11

EN-159A, EN-159B (1-868-002-11)

---

*:B SIDE

C101	B4	C225	A1	C348	*F5	C517	*A1	C607	*G2	IC203	B1	L324	*E3	R142	*C4	R256	C2	R356	*D2	R446	F3	R577	*F2	R667	H2	RB240	B3	RB544	*D2
C102	C4	C226	B1	C349	*E5	C518	*A2	C608	*G2	IC204	A1	L325	*E2	R143	G4	R257	B1	R357	*C2	R447	F4	R578	*F2	R668	H2	RB241	*A4		
C103	*B4	C227	B1	C350	D3	C519	*F1	C609	*G4	IC205	B1	L326	*E3	R144	G4	R258	B2	R358	*D2	R448	E2	R579	*G2	R669	H2	RB242	*A4	RV301	E4
C104	*C4	C228	A1	C351	*C3	C520	*J1	C610	*G4	IC206	B2	L327	*E3	R145	H1	R259	*H3	R359	*D2	R449	E3	R580	*G2	R670	H3	RB243	*B3	RV302	E4
C105	*B4	C229	B2	C352	*C3	C521	G1	C611	*G3	IC207	*H2	L501	*D1	R146	H1	R260	*H3	R360	*E4	R450	E4	R581	*F2	R671	*D1	RB244	*C2	RV303	F3
C106	*B4	C230	B2	C353	D3	C522	G1	C612	*G3	IC208	*H2	L502	*E1	R147	H1	R261	*H4	R361	*E4	R451	E3	R582	*G3	R672	E2	RB245	*C2	RV304	F3
C107	*B4	C231	*H2	C354	*F4	C523	G1	C613	*H3	IC209	*H2	L503	*G1	R148	*B4	R262	*H2	R362	*C3	R452	E2	R583	*G3	R673	E2	RB246	*C2	RV305	F4
C108	*B4	C232	*H2	C355	*F4	C524	*B2	C614	*H3	IC210	A3	L504	*G1	R149	*C4	R263	*H4	R363	*D3	R453	E3	R584	*F3	R674	*G2	RB247	*D1	RV501	F3
C109	*C4	C233	*H2	C356	*F4	C525	*J1	C615	*G3	IC211	C1	L505	G1	R150	*H3	R264	*G4	R364	*C3	R454	F2	R585	*G3	R675	*G3	RB248	*D1	RV502	F2
C110	*B4	C234	A4	C357	*F4	C526	*G1	C616	*G3	IC212	C2	L506	G1	R151	*H4	R265	*G4	R365	*C3	R455	F3	R586	*G3	R901	*H3	RB249	*C1	RV503	F4
C111	H5	C235	*B2	C358	E4	C527	*G1	C617	*G3	IC213	*G4	L507	G1	R152	*H4	R266	*G4	R366	*C3	R456	F3	R587	*F3	R902	B3	RB250	*D1	RV504	H2
C112	H4	C236	*A3	C359	*E2	C528	G1	C618	H2	IC301	D4	L508	*G1	R153	*H4	R267	*H2	R367	C2	R457	F2	R588	*G3	R903	A4	RB251	C1	RV505	H3
C113	H1	C237	*A3	C360	*E3	C529	G1	C619	H2	IC302	*D2	L509	*G1	R154	*H5	R268	*H2	R368	C3	R458	D2	R589	*G3	R904	A4	RB252	*C1	RV506	H3
C114	H1	C238	*A3	C361	*E3	C530	G1	C620	H2	IC303	*C2	L510	F2	R155	*H5	R269	*G4	R369	*E4	R459	C2	R590	G2	R905	A4	RB253	C1		
C115	*G4	C239	*A3	C362	*E2	C531	G1	C621	*H3	IC304	D5	L511	F3	R156	*G5	R270	*A4	R370	C3	R501	*A1	R591	G4	R906	A4	RB254	B3	S201	A4
C116	*G4	C240	*A3	C363	*E3	C532	G1			IC305	D5	L512	F4	R157	*G5	R271	*H3	R371	D3	R502	*A1	R592	*G2	R907	A4	RB255	B3	S301	E5
C117	*B4	C241	*A3	C364	*E3	C533	G1	CL101	B4	IC306	C4	L513	*F2	R158	*F5	R272	*A4	R372	C3	R503	*A1	R593	*G2	R908	A4	RB301	*D4		
C118	*C4	C242	*A3	C365	*E2	C534	G1	CL102	C4	IC307	C4	L514	*F3	R159	*E4	R273	*A4	R373	*E4	R504	E2	R594	*G2	R909	*A1	RB302	*D4	THP101	B4
C119	H1	C243	*A3	C366	*E3	C535	G1	CL103	H1	IC308	D4	L515	*F3	R160	*E4	R274	A4	R374	*C3	R505	E2	R595	*G2	R910	*A1	RB303	*D2	THP102	C4
C120	*B4	C244	*A3	C367	*E3	C536	G1	CL104	G5	IC309	*C4	L516	*G2	R161	*E4	R275	*A2	R375	*C3	R506	E2	R596	*G2	R911	*A3	RB304	*D2	THP103	H4
C121	*C4	C245	*A3	C368	*E3	C537	G1	CL105	G4	IC310	*E4	L517	*G4	R162	*H4	R276	*A2	R376	*E5	R507	E2	R597	*G2	R912	*A3	RB305	D2	THP104	J1
C122	*B4	C246	*A3	C369	*E3	C538	G1	CL106	J4	IC311	D3	L518	*G2	R163	*H4	R277	*A2	R377	*F5	R508	E2	R598	*G2	R913	*H3	RB306	D2	THP105	H5
C123	*C4	C247	*A3	C370	*E4	C539	G1	CL107	J4	IC312	*E4	L519	*H2	R164	G4	R278	*A2	R378	*E4	R509	E2	R599	*G4	R914	B1	RB307	*D2	THP106	H4
C124	*B4	C248	*A3	C371	*E3	C540	G1	CL201	B3	IC313	*F4	L520	*H4	R165	*F4	R279	*B3	R379	*F4	R510	*E1	R600	*G3			RB308	*C3	THP107	H4
C125	*C4	C249	*A3	C372	*E3	C541	G1	CL301	D3	IC314	E2	L521	*G2	R166	*F4	R280	*C2	R380	*F5	R511	*B2	R601	*G3	RB101	J3	RB309	*C3		
C126	*B4	C250	*D2	C373	*E4	C542	G1	CL302	D3	IC315	*E4	L522	*G3	R167	*F4	R281	*C2	R381	*F4	R512	*A2	R602	*G2	RB102	H4	RB310	*C2	TP201	B1
C127	*B4	C251	*D2	C374	*E2	C543	G1	CL303	C3	IC316	E3	L523	*H3	R168	*F4	R282	*C1	R382	*C3	R513	*A2	R603	*G3	RB103	H4	RB311	D2	TP202	J1
C128	*C4	C252	D2	C375	*E3	C544	G1	CL304	C3	IC317	E4	L524	*G3	R169	*F4	R283	C1	R383	*C3	R514	*B2	R604	*G2	RB104	*H3	RB312	D2	TP203	B3
C129	*C4	C253	*C2	C376	*E4	C545	G1	CL305	D3	IC318	E3			R170	*F4	R284	C1	R384	*F4	R515	*A2	R605	*G3	RB105	H4	RB313	*C3	TP204	B3
C130	G5	C254	*C2	C377	*E2	C546	G1	CL306	D3	IC319	F2	Q101	*H5	R171	*F5	R285	*D1	R385	*D3	R516	*A2	R606	*G3	RB106	H4	RB314	*D2	TP205	B3
C131	G4	C255	*D2	C378	*E3	C547	G1	CL501	D1	IC320	F3	Q102	*H4	R172	*F5	R286	*C1	R386	D3	R517	*E1	R607	*G2	RB107	*H4	RB315	*C3	TP206	B3
C132	G5	C256	*D2	C379	*E3	C548	G1	CL502	D1	IC321	F3	Q103	H1	R174	*F4	R287	*D1	R387	*F4	R518	F2	R608	*G3	RB108	*H4	RB316	C3	TP207	H4
C133	H1	C257	*C2	C380	E2	C549	*G1	CL503	D1	IC501	E1	Q104	H1	R175	*G4	R288	*C1	R388	*C3	R519	G1	R609	*G3	RB109	*H4	RB317	*D3	TP301	H4
C134	H1	C258	*C2	C381	E3	C550	*G1	CL504	D1	IC502	B2	Q105	*A4	R176	*G5	R289	*D1	R389	*C3	R520	G1	R610	*G2	RB110	*H4	RB318	C3	TP302	D5
C135	G4	C259	*D2	C382	E3	C551	*F2	CL505	D1	IC503	F1	Q201	B1	R177	*G4	R290	*C1	R390	*F5	R521	G1	R611	*G2	RB111	*H3	RB319	*D3	TP303	E4
C136	B4	C260	*D2	C383	E2	C552	F2			IC504	A2	Q202	B1	R201	B1	R291	*C1	R391	*F5	R522	G1	R612	*G3	RB112	H4	RB320	C3	TP304	F5
C137	C4	C261	*C1	C384	E3	C553	F2	CN501	A1	IC505	F2	Q203	B1	R202	B1	R292	*C1	R392	*F5	R523	G1	R613	*G3	RB113	H4	RB321	C3	TP305	E3
C138	*A1	C262	*C1	C385	E4	C554	F3	CN901	J3	IC506	F3	Q204	B1	R203	B1	R293	*C1	R393	E4	R524	G1	R614	*G2	RB114	H4	RB322	C3	TP306	E2
C139	*H1	C263	*C1	C386	E3	C555	F4	CN902	J5	IC507	F3	Q205	B1	R204	*H1	R294	*C1	R394	*E3	R525	*A3	R615	*G2	RB115	H4	RB323	*E2	TP307	E3
C140	*A1	C264	*C1	C387	E3	C556	F2			IC508	*J1	Q206	*A2	R205	B1	R295	*C1	R395	*E3	R526	*E2	R616	*G3	RB116	*F5	RB324	*E2	TP501	H2
C141	*H1	C265	*D1	C388	E4	C557	F3	D101	*G4	IC509	*J1	Q207	*A2	R206	*H1	R296	*C1	R396	*E3	R527	*A3	R617	*G3	RB117	*F5	RB325	*E2	TP502	H4
C142	H1	C266	*D1	C389	E2	C558	F4	D102	*G4	IC510	*G2	Q208	A4	R207	B1	R297	*C1	R397	*E3	R528	E2	R618	*G2	RB118	*G4	RB326	*E3	TP503	H3
C143	H1	C267	*D1	C390	E3	C559	*F2	D103	A4	IC511	*G3	Q209	A4	R208	B1	R298	*A3	R398	*E4	R529	G1	R619	*G2	RB119	F4	RB327	*E3		
C144	*C2	C268	*D1	C391	E3	C560	F2	D201	B1	IC512	*G3	Q501	G1	R209	B1	R299	*C1	R399	*E4	R530	G1	R620	*G2	RB120	*F4	RB328	*E3		
C145	*C2	C301	D3	C392	E3	C561	*F2	D202	A2	IC513	H2	Q502	G1	R210	*H1	R301	D3	R400	E3	R531	G1	R621	*G2	RB121	F4	RB329	*E3		
C146	H1	C302	D4	C393	E3	C562	F3	D203	A2	IC514	H2	Q503	G1	R211	*H1	R302	D4	R401	E3	R532	G1	R622	*G3	RB122	*F4	RB330	*E3		
C147	*H4	C303	D4	C394	E4	C563	*F3	D204	A3	IC515	H2	Q504	*G3	R212	B1	R303	D4	R402	E4	R533	G1	R623	*G2	RB123	F4	RB331	*E4		
C148	*H4	C304	D4	C395	E2	C564	F4	D205	A4	IC516	*G2	Q505	*G2	R213	*H1	R304	D4	R403	E2	R534	G1	R624	*G4	RB124	F4	RB501	E1		
C149	*G4	C305	D4	C396	E2	C565	*F2	D301	D4	IC517	*G3			R214	*H1	R305	D4	R404	E3	R535	G1	R625	*G4	RB125	*F5	RB502	E1		
C150	*H4	C306	*D4	C397	E3	C566	*F3	D302	C4	IC518	F2	R101	*A4	R215	B1	R306	D4	R405	E3	R536	G1	R626	*G3	RB127	G4	RB503	E2		
C151	G5	C307	D4	C398	E3	C567	*F3	D501	F2	IC519	F2	R102	*A4	R216	B1	R307	D4	R406	E2	R537	G1	R627	*G2	RB128	*F4	RB504	E2		
C152	G4	C308	D4	C399	E3	C568	*F2	D502	*F3			R103	*A4	R217	B1	R308	D4	R407	E3	R538	G1	R628	*H2	RB201	B2	RB505	*E2		
C153	*G4	C309	D4	C400	E3	C569	*F3	D503	*G2	L101	B4	R104	*A4	R218	B1	R309	D4	R408	E3	R539	G1	R629	*G2	RB202	*H2	RB506	*E2		
C155	*G4	C310	D4	C401	E2	C570	*F3	D504	*F4	L102	C4	R105	*A4	R219	B1	R311	D5	R409	E3	R540	G1	R630	*G2	RB203	*H2	RB507	E2		
C156	H4	C311	*D2	C402	E3	C571	*F2			L103	C4	R106	*A4	R220	B1	R312	D5	R410	E3	R541	G1	R631	*H3	RB204	*H2	RB508	E2		
C157	H4	C312	*C2	C403	E3	C572	*F3	E101	C3	L104	B4	R107	*B4	R221	J1	R313	D5	R411	E3	R542	G1	R632	*G3	RB205	*H2	RB509	F1		
C158	H5	C313	D5	C404	*E2	C573	*F3	E102	F2	L105	H4	R108	*C4	R222	B1	R314	D4	R412	E3	R543	G1	R633	*G3	RB206	*H2	RB510	F1		
C159	H3	C314	D5	C405	*E2	C574	*F2	E103	G4	L106	H4	R109	*B4	R223	*H1	R315	*D4	R413	E3	R544	G1	R634	*G2	RB207	*H3	RB511	F1		
C160	*H3	C315	D4	C406	*E3	C575	*F2	E104	*C3	L201	B1	R110	*C4	R224	*H2	R316	D5	R414	E3	R545	G1	R635	*G2	RB208	B2	RB512	F1		
C161	*H5	C316	D5	C407	*E3	C576	*F3			L202	C1	R111	*C4	R225	*H2	R317	D4	R415	E4	R546	G1	R636	*G2	RB209	B2	RB513	F1		
C162	*H4	C317	*D4	C408	*E3	C577	*F2	FB101	*B4	L203	B1	R112	*A4	R226	*H2	R318	D5	R416	E4	R547	*B2	R637	*G2	RB210	*H2	RB514	*J1		
C163	*H4	C318	*C4	C409	*E3	C578	*F3	FB102	*B4	L204	B2	R113	*A4	R227	*H1	R319	*D4	R417	E4	R548	F2	R638	*G2	RB211	*H2	RB515	F1		
C164	*F4	C319	*D5	C410	*F2	C579	*F3	FB103	*B4	L205	C2	R114	*A4	R228	*H1	R320	D4	R418	E3	R549	F2	R639	*G4	RB212	*H2	RB516	*F1		
C165	*G4	C320	*C4	C411	*F2	C580	*F2	FB104	*B4	L206	A4	R115	H1	R229	*H1	R321	D5	R419	E3	R550	F2	R640	*G2	RB213	*H2	RB517	*F1		
C166	G4	C321	C4	C412	*F3	C581	*F3	FB301	*C2	L207	*B2	R116	H1	R230	*H1	R322	*D4	R420	E3	R551	F2	R641	*G2	RB214	*H2	RB518	*F1		
C167	*E4	C322	C4	C413	*F3	C582	*F3	FB302	*C2	L208	*D2	R117	*G4	R231	*H1	R323	D4	R421	E3	R552	F2	R642	*G2	RB215	A2	RB519	*J1		
C201	*H1	C323	C4	C414	*F4	C583	*G3			L209	*C1	R118	*G4	R232	*H1	R324	D4	R422	E4	R553	F2	R643	*G3	RB216	A2	RB520	*F2		
C202	*H1	C324	D4	C415	*F3	C584	F2	FL501	G2	L301	*D4	R119	*C4	R233	B1	R325	D4	R423	E4	R554	F3	R644	*H2	RB217	A2	RB521	*F2		
C203	B1	C325	D4	C416	E3	C585	F4	FL502	G3	L302	*D4	R120	*B4	R234	B1	R326	D4	R424	E3	R555	F3	R645	*G3	RB218	A2	RB522	*F2		
C204	C1	C326	*D4	C417	E3	C586	*G3	FL503	G3	L303	D4	R121	H1	R235	C1	R327	*D4	R425	E3	R556	*F2	R646	*G4	RB219	A2	RB523	*F2		
C205	*H1	C328	*D4	C418	E3	C587	G2			L304	*C4	R122	*B4	R236	B1	R329	D4	R426	E4	R557	*F4	R647	*G2	RB220	*A2	RB524	*F2		
C206	B1	C329	*D4	C419	E3	C588	G4	IC101	G4	L305	*D5	R123	*B4	R237	B1	R331	D4	R427	E2	R558	*F4	R648	*H3	RB221	*A4	RB525	*F3		
C207	B1	C330	*C4	C420	E4	C589	*G2	IC102	H1	L306	*C4	R124	*B4	R238	C1	R332	C4	R428	E3	R559	*F2	R649	*G3	RB222	*A4	RB526	*F3		
C208	B1	C331	C2	C421	E4	C590	*G2	IC104	*B4	L307	*D4	R125	*C4	R239	C1	R333	*C4	R429	E3	R560	*F2	R650	*G3	RB223	B3	RB527	*F3		
C209	B1	C332	C2	C501	*D1	C591	*G3	IC105	*C4	L308	*E4	R126	*C4	R240	C1	R334	C5	R430	E2	R561	*F2	R651	*G2	RB224	B3	RB528	*F3		
C210	B1	C333	*E5	C502	*E1	C592	*G4	IC106	G4	L309	*E5	R127	*C4	R241	C1	R341	*D4	R431	F2	R562	*F3	R652	*G2	RB225	B3	RB529	H2		
C211	B1	C334	E4	C503	*E2	C593	*G4	IC107	*H3	L310	*E4	R128	*B4	R242	A1	R342	*E4	R432	E3	R563	*F3	R653	*G3	RB226	B3	RB530	H2		
C212	B1	C335	*E4	C504	*D1	C594	*G3	IC108	*H4	L311	*F4	R129	*C4	R243	A1	R343	*E4	R433	F3	R564	*F4	R654	*G2	RB227	B3	RB531	H2		
C213	B1	C336	C2	C505	*E1	C595	*G3	IC109	*H4	L312	*F4	R130	*A4	R244	C2	R344	*E4	R434	E3	R565	*F2	R655	*G2	RB228	A2	RB532	H2		
C214	B1	C337	D2	C506	*D1	C596	*G3	IC110	F4	L313	*E3	R131	*A4	R245	C2	R345	*E4	R435	F4	R566	*F2	R656	*G3	RB229	A2	RB533	H2		
C215	B2	C338	D2	C507	*E1	C597	*H2	IC111	*F4	L314	*E3	R132	G4	R246	C2	R346	*E4	R436	F2	R567	*F2	R657	*G3	RB230	B2	RB534	H3		
C216	C2	C339	C2	C508	*E1	C598	*G2	IC112	*G5	L315	*E4	R133	G4	R247	C1	R347	*E4	R437	F2	R568	*F3	R658	*G3	RB231	B2	RB535	*H3		
C217	B2	C340	E4	C509	*E1	C599	*G2	IC113	*H5	L316	*E2	R134	*B4	R248	C1	R348	*E4	R438	F2	R569	*F3	R659	*G3	RB232	B2	RB536	H3		
C218	C2	C341	*E4	C510	*E1	C600	*G3	IC114	*F4	L317	*E3	R135	*C4	R249	B1	R349	*D2	R439	F3	R570	*F2	R660	*G3	RB233	*A4	RB537	*H3		
C219	B1	C342	D3	C511	*D2	C601	*G3	IC115	*G5	L318	*E3	R136	*A4	R250	A1	R350	*D2	R440	F3	R571	*F2	R661	*G3	RB234	*B3	RB538	H3		
C220	C1	C343	*C3	C512	*E1	C602	H2	IC116	*G5	L319	E2	R137	G4	R251	A1	R351	*C2	R441	F3	R572	*F3	R662	*G3	RB235	*B3	RB539	*H3		
C221	B1	C344	*C3	C513	*D1	C603	*H2	IC117	*C4	L320	E3	R138	H1	R252	A1	R352	*D2	R442	F3	R573	*F4	R663	H2	RB236	*B3	RB540	H2		
C222	B1	C345	D3	C514	*E1	C604	*H2	IC118	*A4	L321	E3	R139	H1	R253	B1	R353	*D2	R443	F3	R574	*F4	R664	*H3	RB237	*A4	RB541	H2		
C223	B1	C346	*E4	C515	*E1	C605	*H3	IC201	*H1	L322	*E2	R140	*A4	R254	B1	R354	*E4	R444	F4	R575	*F4	R665	*H3	RB238	*A4	RB542	H2		
C224	B1	C347	*E4	C516	*E2	C606	*H3	IC202	*H1	L323	*E3	R141	*B4	R255	C2	R355	*D2	R445	F3	R576	*F2	R666	H3	RB239	*A4	RB543	H2		

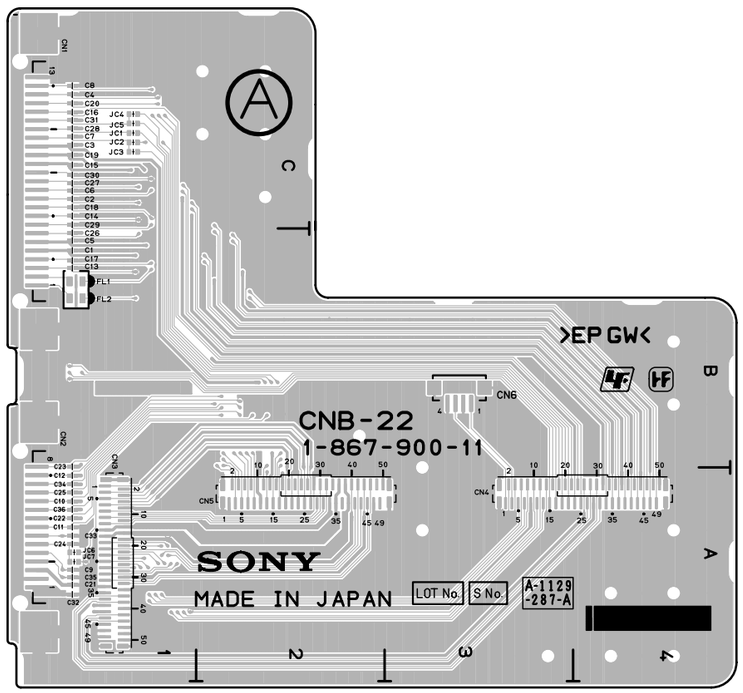

CNB-22 -A SIDE-
SUFFIX: -11, 31

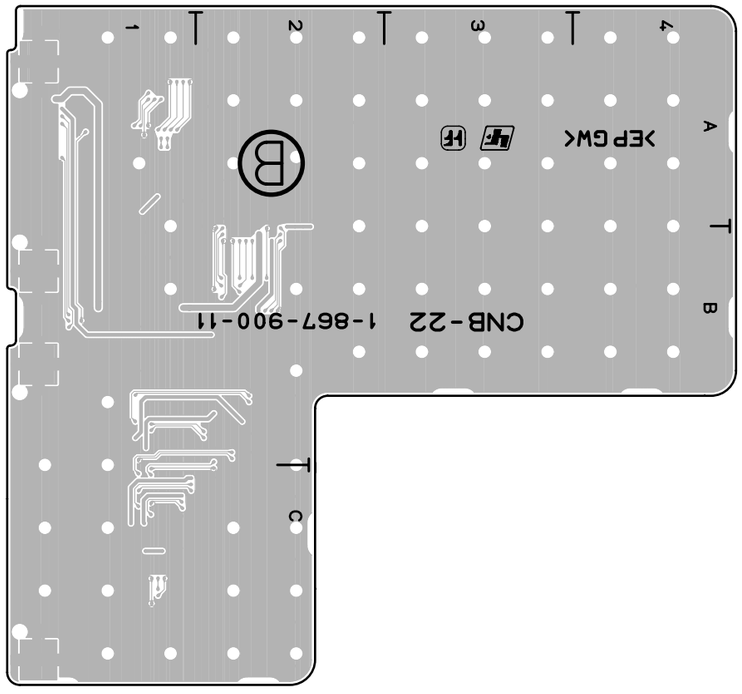

CNB-22 -B SIDE-
SUFFIX: -11, 31

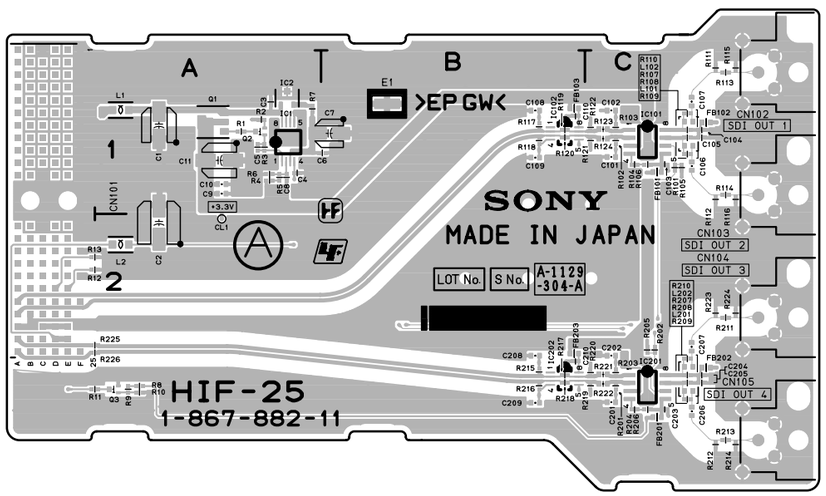

HIF-25 -A SIDE-
SUFFIX: -11, 31

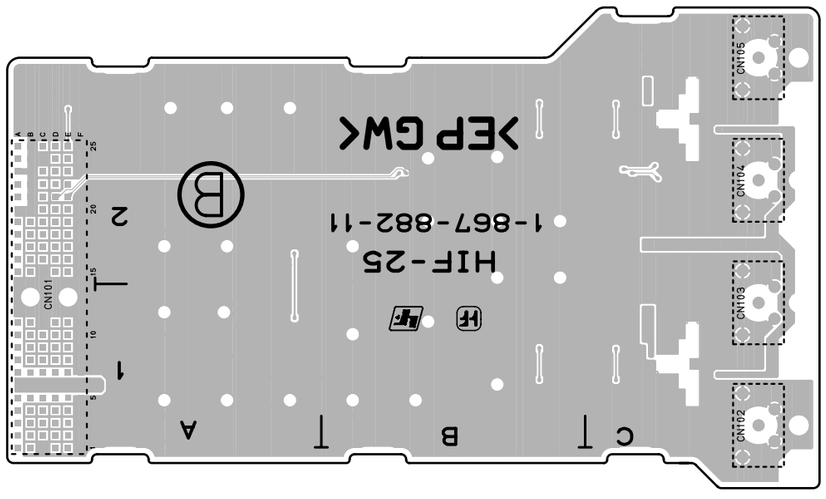

HIF-25 -B SIDE-
SUFFIX: -11, 31

HIF-25 (1-867-882-11, 31)

C1	A1	R13	A2
C2	A2	R101	C1
C3	A1	R102	C1
C4	A1	R103	C1
C5	A1	R104	C1
C6	B1	R105	C1
C7	B1	R106	C1
C8	A1	R107	C1
C9	A1	R108	C1
C10	A1	R109	C1
C11	A1	R110	C1
C101	C1	R111	C1
C102	C1	R112	C1
C103	C1	R113	C1
C104	C1	R114	C1
C105	C1	R115	C1
C106	C1	R116	C1
C107	C1	R117	B1
C108	B1	R118	B1
C109	B1	R119	B1
C110	B1	R120	B1
C201	C2	R121	C1
C202	C2	R122	C1
C203	C2	R123	C1
C204	C2	R124	C1
C205	C2	R201	C2
C206	C2	R202	C2
C207	C2	R203	C2
C208	B2	R204	C2
C209	B2	R205	C2
C210	B2	R206	C2
		R207	C2
CL1	A2	R208	C2
		R209	C2
CN101	A1	R210	C2
CN102	C1	R211	C2
CN103	C1	R212	C2
CN104	C2	R213	C2
CN105	C2	R214	C2
		R215	B2
E1	B1	R216	B2
		R217	B2
FB101	C1	R218	B2
FB102	C1	R219	C2
FB103	B1	R220	C2
FB201	C2	R221	C2
FB202	C2	R222	C2
FB203	B2	R223	C2
		R224	C2
IC1	A1	R225	A2
IC2	A1	R226	A2
IC101	C1		
IC102	B1		
IC201	C2		
IC202	B2		
L1	A1		
L2	A2		
L101	C1		
L102	C1		
L201	C2		
L202	C2		
Q1	A1		
Q2	A1		
Q3	A2		
R1	A1		
R2	A1		
R3	A1		
R4	A1		
R5	A1		
R6	A1		
R7	A1		
R8	A2		
R9	A2		
R10	A2		
R11	A2		
R12	A2		

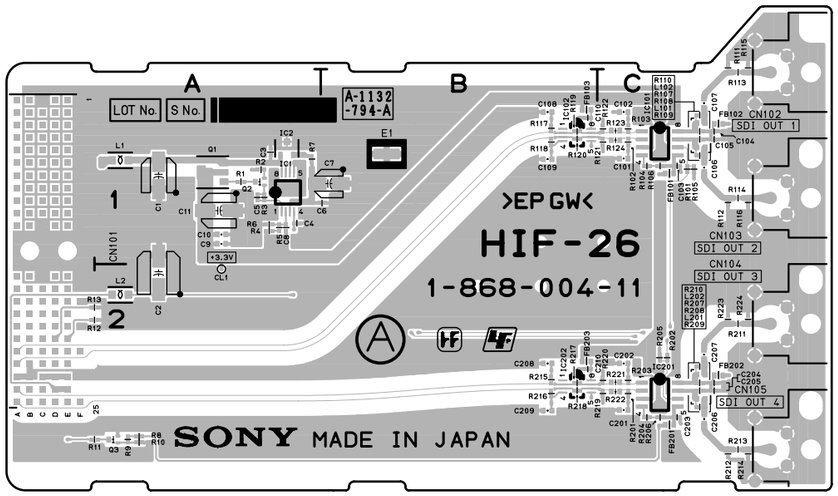

HIF-26 -A SIDE-
SUFFIX: -11

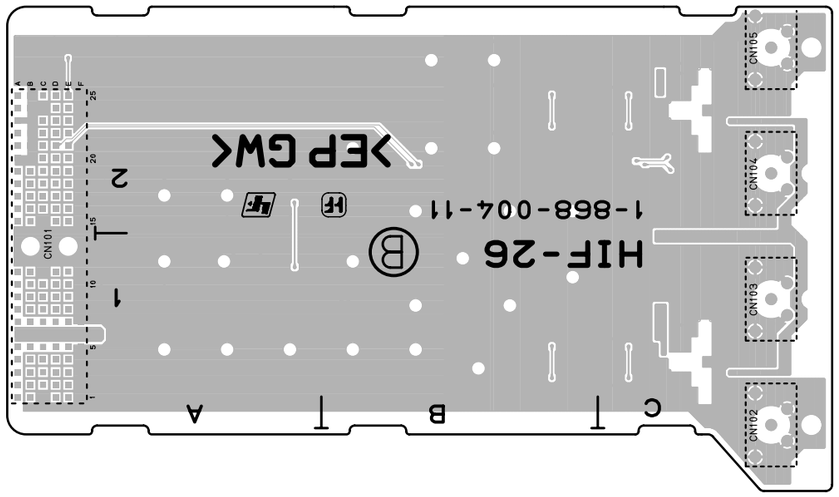

HIF-26 -B SIDE-
SUFFIX: -11

HIF-26 (1-868-004-11)			
C1	A1	R13	A2
C2	A2	R101	C1
C3	A1	R102	C1
C4	A1	R103	C1
C5	A1	R104	C1
C6	B1	R105	C1
C7	B1	R106	C1
C8	A1	R107	C1
C9	A1	R108	C1
C10	A1	R109	C1
C11	A1	R110	C1
C101	C1	R111	C1
C102	C1	R112	C1
C103	C1	R113	C1
C104	C1	R114	C1
C105	C1	R115	C1
C106	C1	R116	C1
C107	C1	R117	B1
C108	B1	R118	B1
C109	B1	R119	B1
C110	B1	R120	B1
C201	C2	R121	C1
C202	C2	R122	C1
C203	C2	R123	C1
C204	C2	R124	C1
C205	C2	R201	C2
C206	C2	R202	C2
C207	C2	R203	C2
C208	B2	R204	C2
C209	B2	R205	C2
C210	B2	R206	C2
		R207	C2
CL1	A2	R208	C2
		R209	C2
CN101	A1	R210	C2
CN102	C1	R211	C2
CN103	C1	R212	C2
CN104	C2	R213	C2
CN105	C2	R214	C2
		R215	B2
E1	B1	R216	B2
		R217	B2
FB101	C1	R218	B2
FB102	C1	R219	C2
FB103	B1	R220	C2
FB201	C2	R221	C2
FB202	C2	R222	C2
FB203	B2	R223	C2
		R224	C2
IC1	A1		
IC2	A1		
IC101	C1		
IC102	B1		
IC201	C2		
IC202	B2		
L1	A1		
L2	A2		
L101	C1		
L102	C1		
L201	C2		
L202	C2		
Q1	A1		
Q2	A1		
Q3	A2		
R1	A1		
R2	A1		
R3	A1		
R4	A1		
R5	A1		
R6	A1		
R7	A1		
R8	A2		
R9	A2		
R10	A2		
R11	A2		
R12	A2		

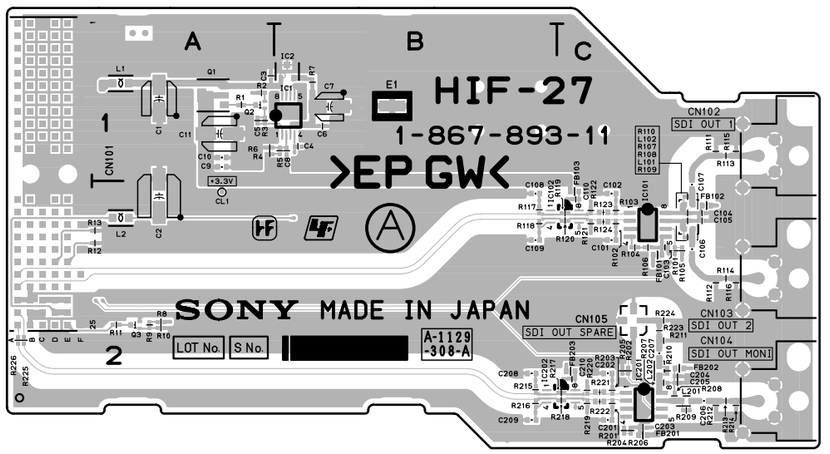

HIF-27 -A SIDE-
SUFFIX: -11, 31

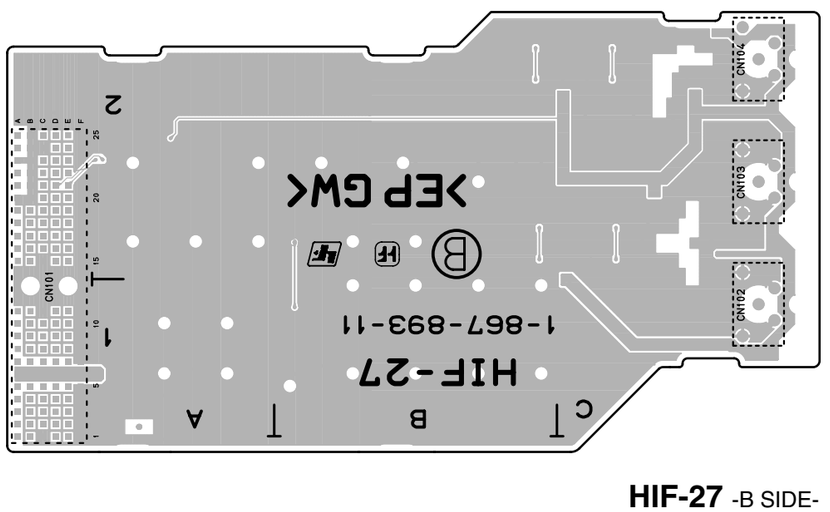

HIF-27 -B SIDE-
SUFFIX: -11, 31

HIF-27 (1-867-893-11, 31)			
C1	A1	R101	C2
C2	A2	R102	C2
C3	A1	R103	C2
C4	B1	R104	C2
C5	A1	R105	C2
C6	B1	R106	C2
C7	B1	R107	C2
C8	B1	R108	C2
C9	A1	R109	C2
C10	A1	R110	C2
C11	A1	R111	C1
C101	C2	R112	C2
C102	C2	R113	C1
C103	C2	R114	C2
C104	C2	R115	C1
C105	C2	R116	C2
C106	C2	R117	B2
C107	C2	R118	B2
C108	B2	R119	C2
C109	B2	R120	C2
C110	C2	R121	C2
C201	C2	R122	C2
C202	C2	R123	C2
C203	C2	R124	C2
C204	C2	R201	C2
C205	C2	R202	C2
C206	C2	R203	C2
C207	C2	R204	C2
C208	B2	R205	C2
C209	B2	R206	C2
C210	C2	R207	C2
		R208	C2
CL1	A2	R209	C2
		R210	C2
CN101	A1	R211	C2
CN102	C1	R212	C2
CN103	C2	R213	C2
CN104	C2	R214	C2
CN105	C2	R215	B2
		R216	B2
E1	B1	R217	C2
		R218	C2
FB101	C2	R219	C2
FB102	C2	R220	C2
FB103	C2	R221	C2
FB201	C2	R222	C2
FB202	C2	R223	C2
FB203	C2	R224	C2
		R225	A2
IC1	B1	R226	A2
IC2	B1		
IC101	C2		
IC102	B2		
IC201	C2		
IC202	B2		
L1	A1		
L2	A2		
L101	C2		
L102	C2		
L201	C2		
L202	C2		
Q1	A1		
Q2	A1		
Q3	A2		
R1	A1		
R2	A1		
R3	A1		
R4	A1		
R5	B1		
R6	A1		
R7	B1		
R8	A2		
R9	A2		
R10	A2		
R11	A2		
R12	A2		
R13	A2		

CNB-22, HIF-25

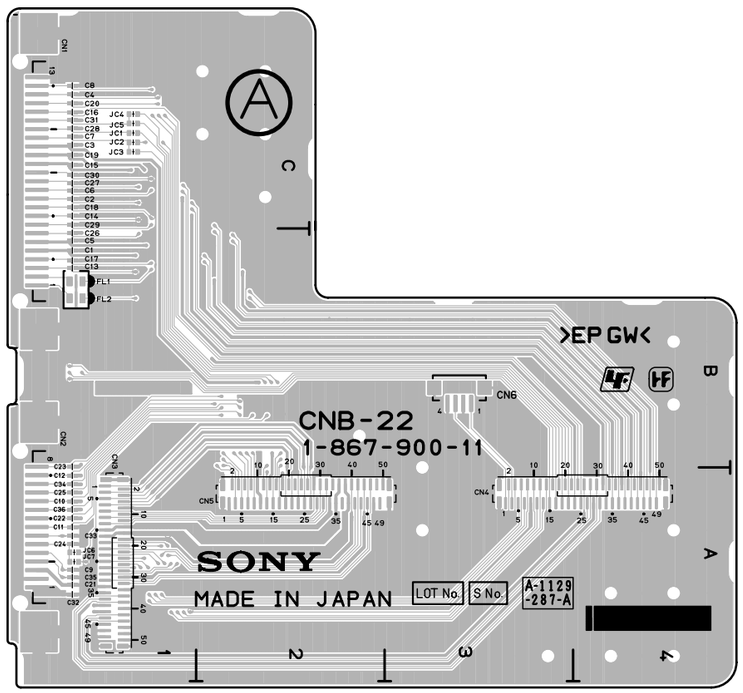

CNB-22 -A SIDE-
SUFFIX: -11, 31

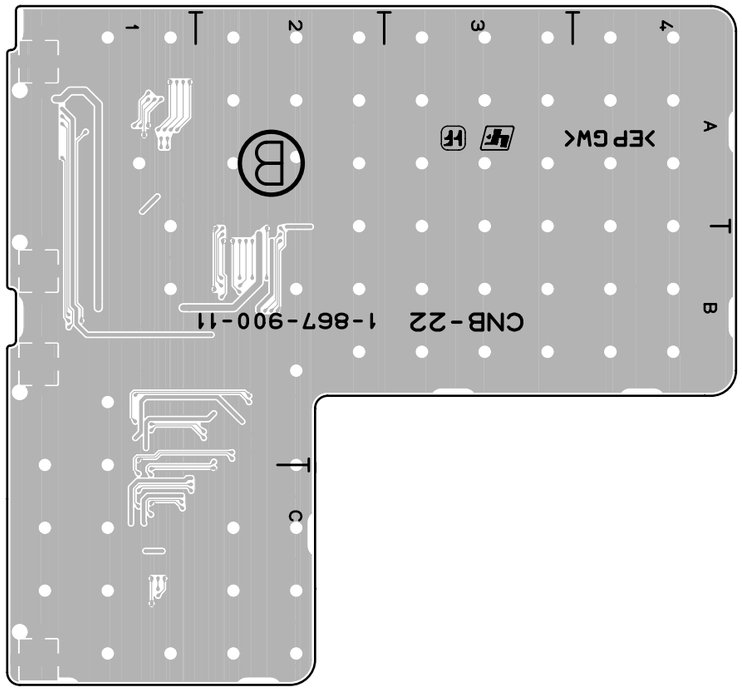

CNB-22 -B SIDE-
SUFFIX: -11, 31

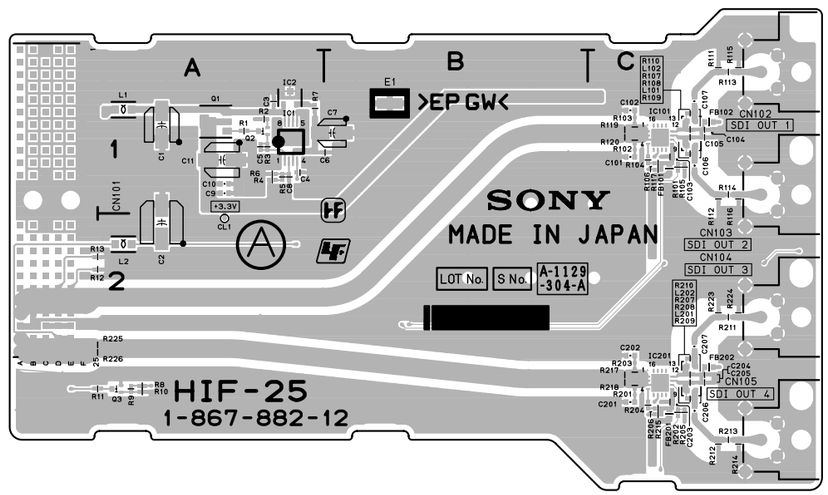

HIF-25 -A SIDE-
SUFFIX: -12, 32

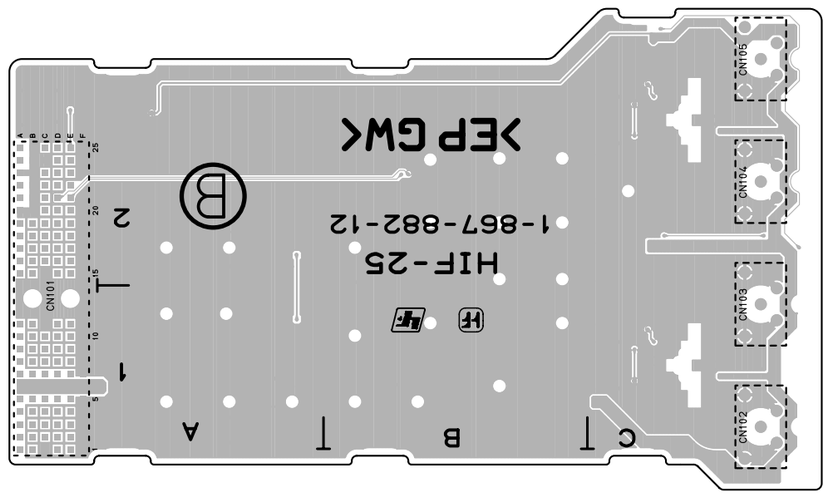

HIF-25 -B SIDE-
SUFFIX: -12, 32

HIF-25 (1-867-882-12, 32)

C1	A1	R110	C1
C2	A2	R111	C1
C3	A1	R112	C1
C4	A1	R113	C1
C5	A1	R114	C1
C6	B1	R115	C1
C7	B1	R116	C1
C8	A1	R117	C1
C9	A1	R119	C1
C10	A1	R120	C1
C11	A1	R201	C2
C101	C1	R202	C2
C102	C1	R203	C2
C103	C1	R204	C2
C104	C1	R205	C2
C105	C1	R206	C2
C106	C1	R207	C2
C107	C1	R208	C2
C201	C2	R209	C2
C202	C2	R210	C2
C203	C2	R211	C2
C204	C2	R212	C2
C205	C2	R213	C2
C206	C2	R214	C2
C207	C2	R215	C2
		R217	C2
CL1	A2	R218	C2
		R223	C2
CN101	A1	R224	C2
CN102	C1	R225	A2
CN103	C1	R226	A2
CN104	C2		
CN105	C2		
E1	B1		
FB101	C1		
FB102	C1		
FB201	C2		
FB202	C2		
IC1	A1		
IC2	A1		
IC101	C1		
IC201	C2		
L1	A1		
L2	A2		
L101	C1		
L102	C1		
L201	C2		
L202	C2		
Q1	A1		
Q2	A1		
Q3	A2		
R1	A1		
R2	A1		
R3	A1		
R4	A1		
R5	A1		
R6	A1		
R7	A1		
R8	A2		
R9	A2		
R10	A2		
R11	A2		
R12	A2		
R13	A2		
R101	C1		
R102	C1		
R103	C1		
R104	C1		
R105	C1		
R106	C1		
R107	C1		
R108	C1		
R109	C1		

8-18 (a)

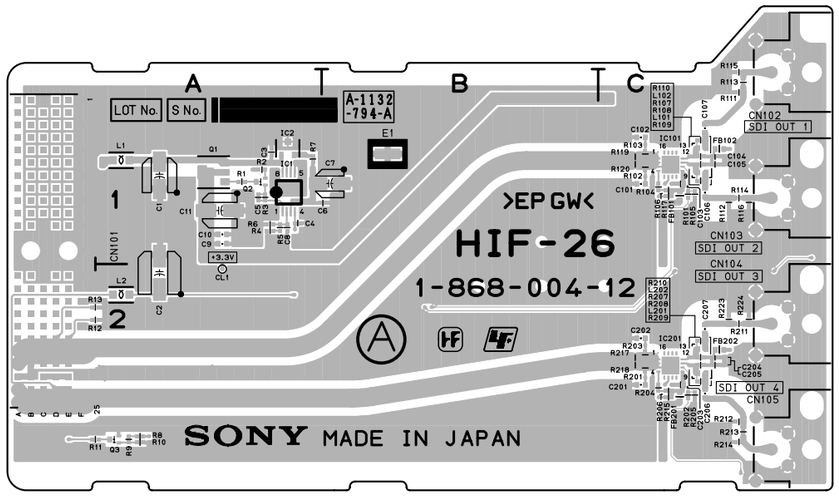

HIF-26 -A SIDE-
SUFFIX: -12

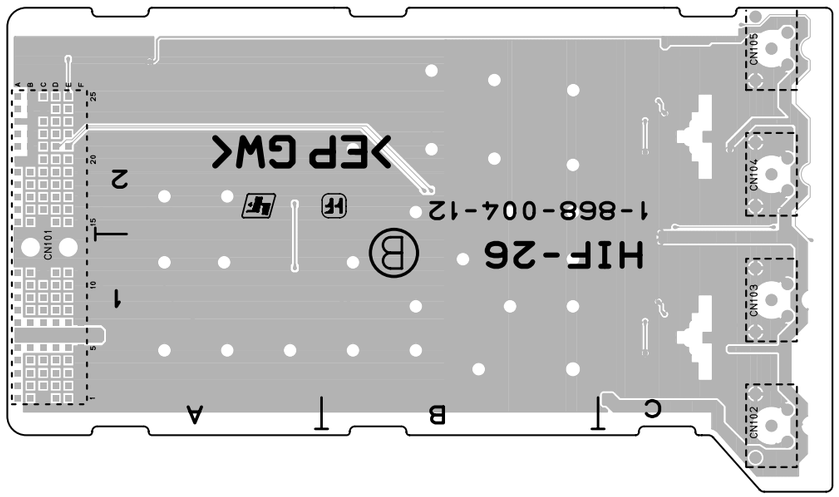

HIF-26 -B SIDE-
SUFFIX: -12

HIF-26 (1-868-004-12)

C1	A1	R110	C1
C2	A2	R111	C1
C3	A1	R112	C1
C4	A1	R113	C1
C5	A1	R114	C1
C6	B1	R115	C1
C7	B1	R116	C1
C8	A1	R117	C1
C9	A1	R119	C1
C10	A1	R120	C1
C11	A1	R201	C2
C101	C1	R202	C2
C102	C1	R203	C2
C103	C1	R204	C2
C104	C1	R205	C2
C105	C1	R206	C2
C106	C1	R207	C2
C107	C1	R208	C2
C201	C2	R209	C2
C202	C2	R210	C2
C203	C2	R211	C2
C204	C2	R212	C2
C205	C2	R213	C2
C206	C2	R214	C2
C207	C2	R215	C2
		R217	C2
CL1	A2	R218	C2
		R223	C2
CN101	A1	R224	C2
CN102	C1		
CN103	C1		
CN104	C2		
CN105	C2		
E1	B1		
FB101	C1		
FB102	C1		
FB201	C2		
FB202	C2		
IC1	A1		
IC2	A1		
IC101	C1		
IC201	C2		
L1	A1		
L2	A2		
L101	C1		
L102	C1		
L201	C2		
L202	C2		
Q1	A1		
Q2	A1		
Q3	A2		
R1	A1		
R2	A1		
R3	A1		
R4	A1		
R5	A1		
R6	A1		
R7	A1		
R8	A2		
R9	A2		
R10	A2		
R11	A2		
R12	A2		
R13	A2		
R101	C1		
R102	C1		
R103	C1		
R104	C1		
R105	C1		
R106	C1		
R107	C1		
R108	C1		
R109	C1		

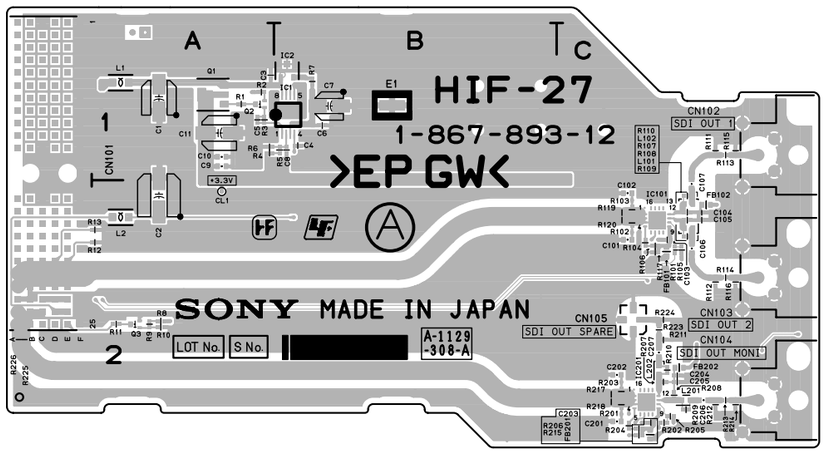

HIF-27 -A SIDE-
SUFFIX: -12, 32

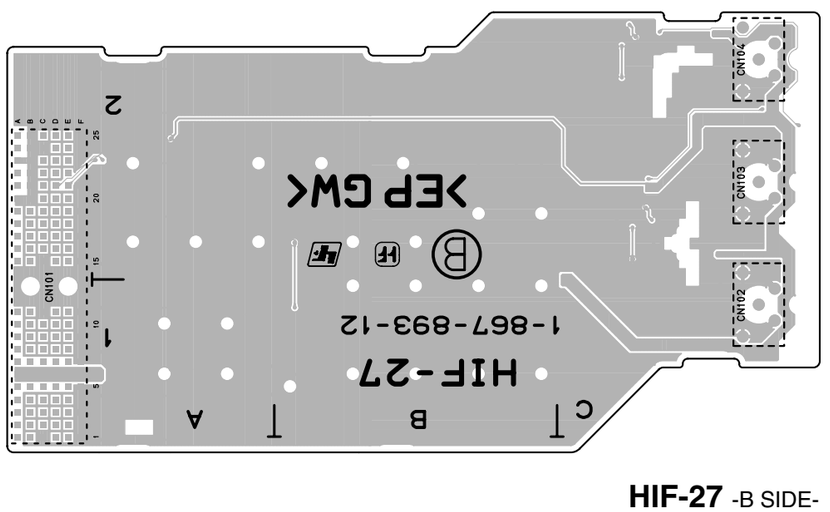

HIF-27 -B SIDE-
SUFFIX: -12, 32

HIF-27 (1-867-893-12, 32)

C1	A1	R111	C1
C2	A2	R112	C2
C3	A1	R113	C1
C4	B1	R114	C2
C5	A1	R115	C1
C6	B1	R116	C2
C7	B1	R117	C2
C8	B1	R119	C2
C9	A1	R120	C2
C10	A1	R201	C2
C11	A1	R202	C2
C101	C2	R203	C2
C102	C2	R204	C2
C103	C2	R205	C2
C104	C2	R206	C2
C105	C2	R207	C2
C106	C2	R208	C2
C107	C2	R209	C2
C201	C2	R210	C2
C202	C2	R211	C2
C203	C2	R212	C2
C204	C2	R213	C2
C205	C2	R214	C2
C206	C2	R215	C2
C207	C2	R217	C2
		R218	C2
CL1	A2	R223	C2
		R224	C2
CN101	A1	R225	A2
CN102	C1	R226	A2
CN103	C2		
CN104	C2		
CN105	C2		
E1	B1		
FB101	C2		
FB102	C2		
FB201	C2		
FB202	C2		
IC1	B1		
IC2	B1		
IC101	C2		
IC201	C2		
L1	A1		
L2	A2		
L101	C2		
L102	C2		
L201	C2		
L202	C2		
Q1	A1		
Q2	A1		
Q3	A2		
R1	A1		
R2	A1		
R3	A1		
R4	A1		
R5	B1		
R6	A1		
R7	B1		
R8	A2		
R9	A2		
R10	A2		
R11	A2		
R12	A2		
R13	A2		
R101	C2		
R102	C2		
R103	C2		
R104	C2		
R105	C2		
R106	C2		
R107	C2		
R108	C2		
R109	C2		
R110	C2		

MB-1071, MB-1071A

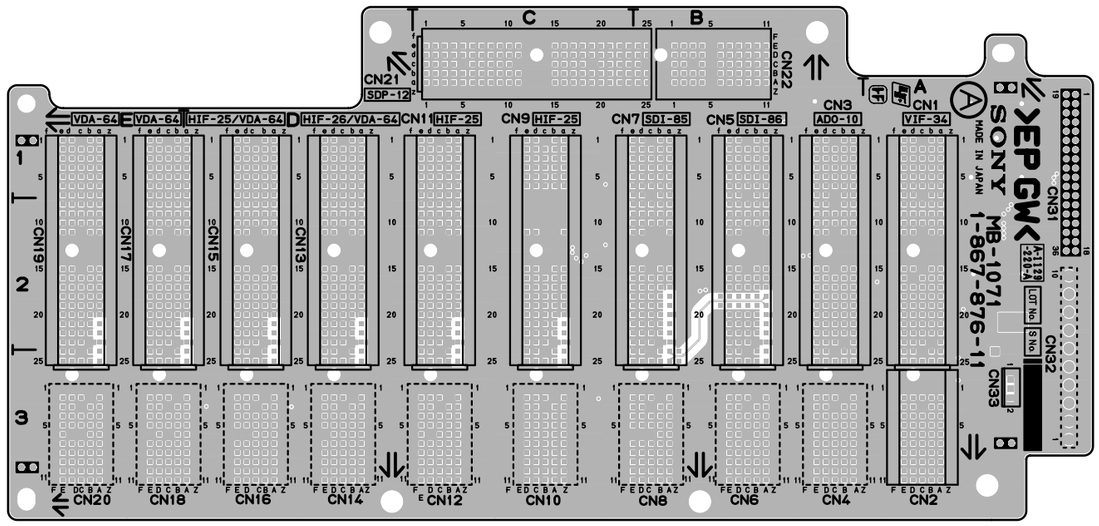

MB-1071 -A SIDE-
SUFFIX: -11, 31

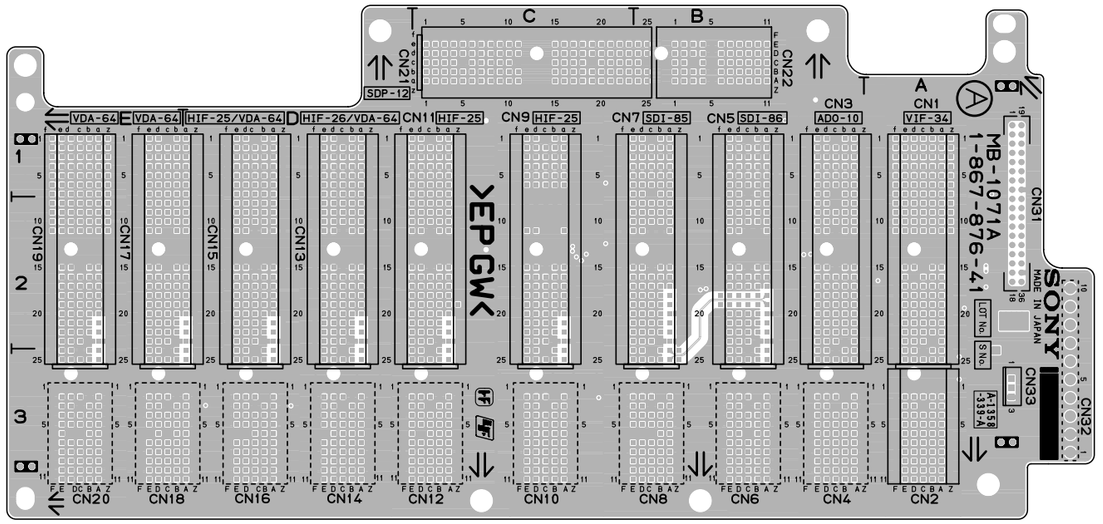

MB-1071A -A SIDE-
SUFFIX: -41

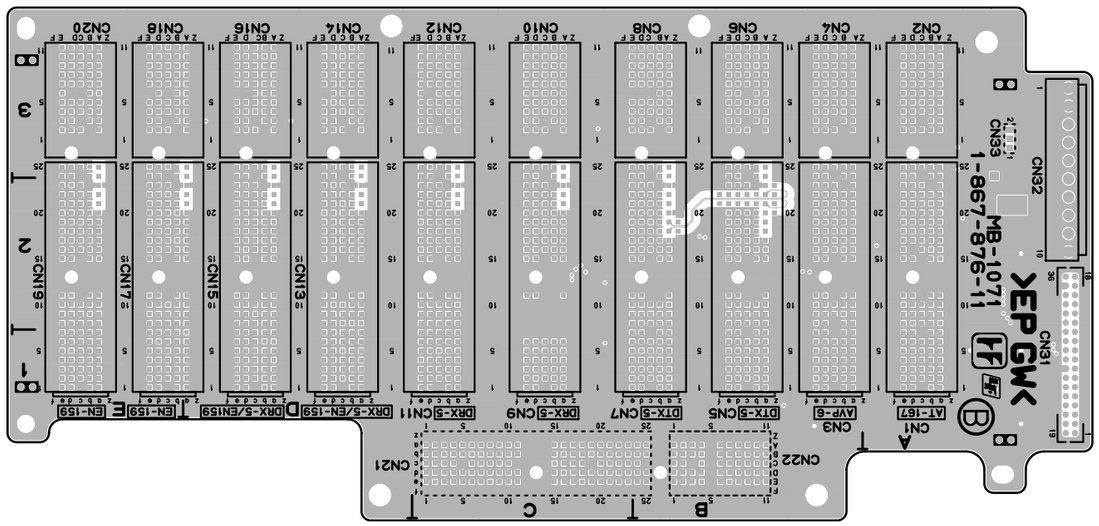

MB-1071 -B SIDE-
SUFFIX: -11, 31

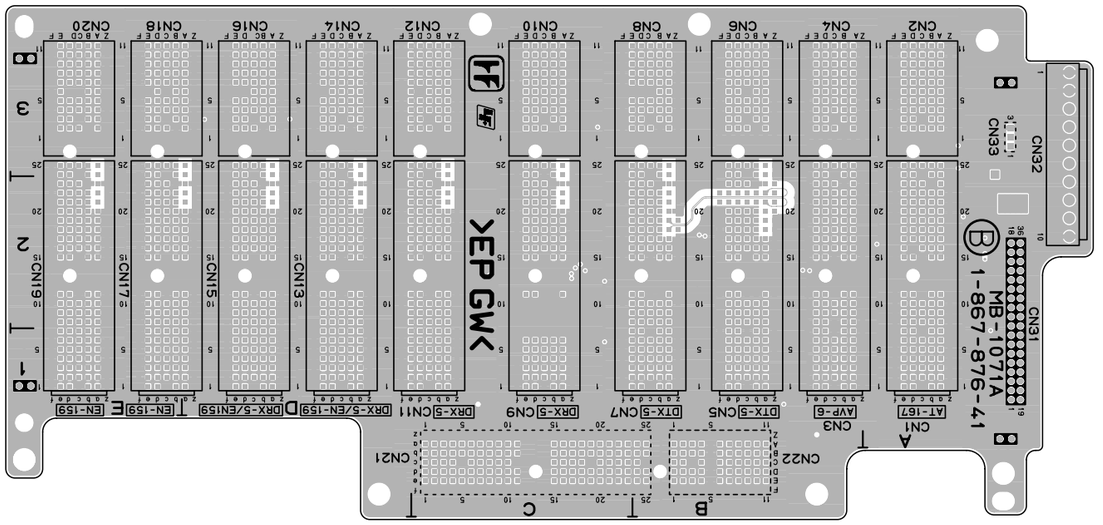

MB-1071A -B SIDE-
SUFFIX: -41

8-20

MB-1072, SDI-85

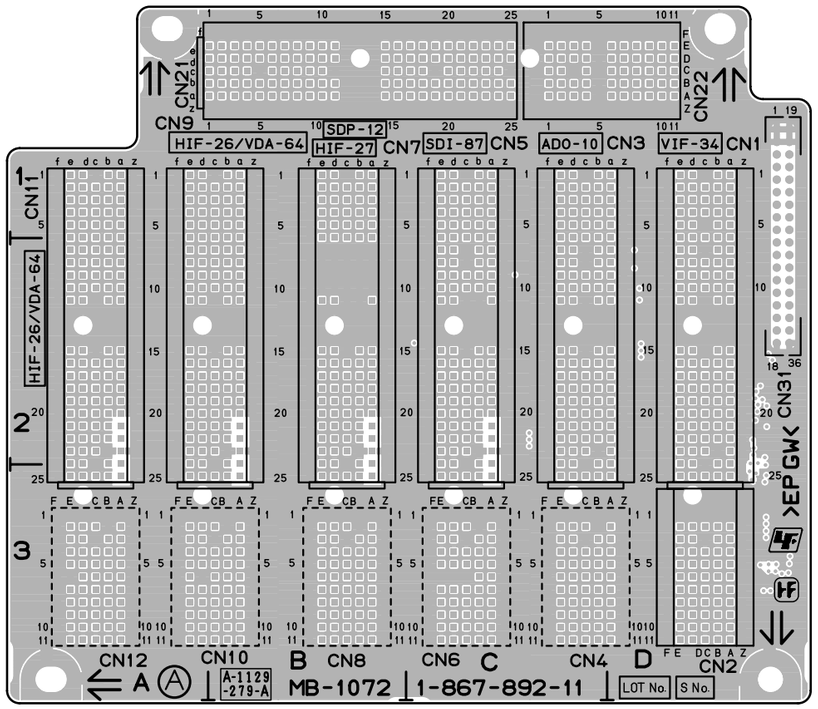

MB-1072
-A SIDE-
SUFFIX: -11, 31

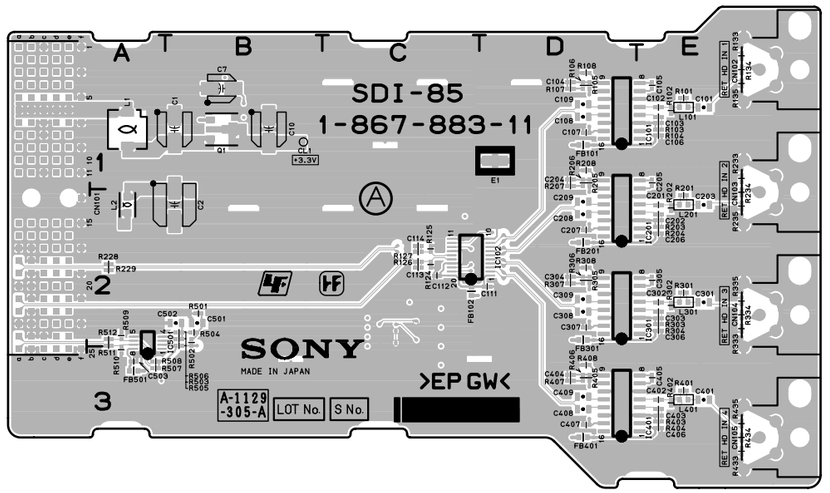

SDI-85 -A SIDE-
SUFFIX: -11, 31

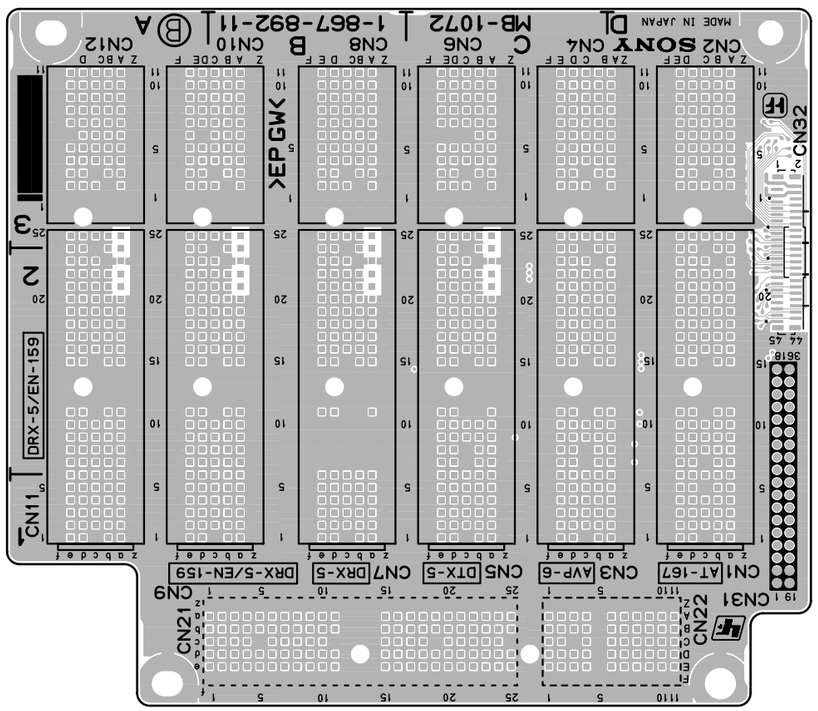

MB-1072
-B SIDE-
SUFFIX: -11, 31

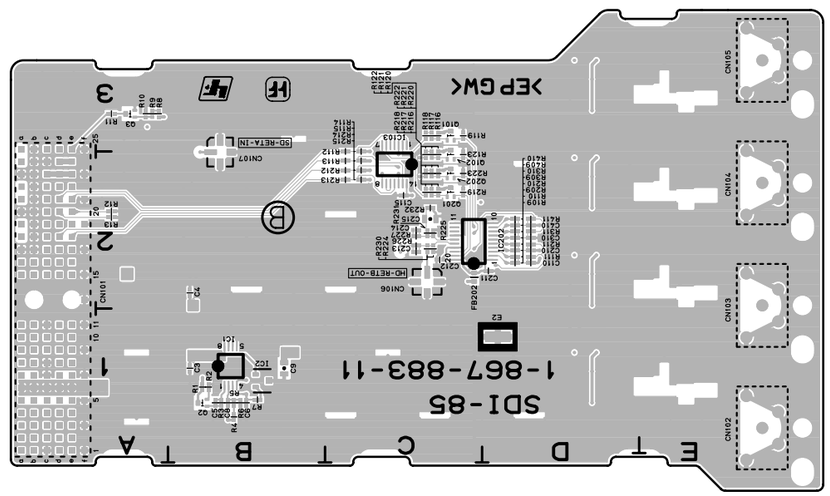

SDI-85 -B SIDE-
SUFFIX: -11, 31

SDI-85 (1-867-883-11, 31)
---

*:B SIDE

C1	B1	FB102	C2	R203	E2
C2	B2	FB201	D2	R204	E2
C3	*B1	FB202	*C2	R205	D1
C4	*B2	FB301	D2	R206	D1
C5	*B1	FB401	D3	R207	D1
C6	*B1	FB501	A3	R208	D1
C7	B1			R209	*D2
C8	*B1	IC1	*B1	R210	*D2
C9	*B1	IC2	*B1	R211	*D2
C10	B1	IC101	E1	R212	*C2
C101	E1	IC102	D2	R213	*C2
C102	E1	IC103	*C3	R214	*C2
C103	E1	IC201	E2	R215	*C2
C104	D1	IC202	*D2	R216	*C2
C105	E1	IC301	E2	R217	*C2
C106	E1	IC401	E3	R218	*C2
C107	D1	IC501	A3	R219	*C2
C108	D1			R220	*C2
C109	D1	L1	A1	R221	*C2
C110	*D2	L2	A2	R222	*C2
C111	D2	L101	E1	R223	*C2
C112	C2	L201	E2	R224	*C2
C113	C2	L301	E2	R225	*C2
C114	C2	L401	E3	R226	*C2
C115	*C2			R227	*C2
C201	E2	Q1	B1	R228	A2
C202	E2	Q2	*B1	R229	A2
C203	E2	Q3	*A3	R230	*C2
C204	D1	Q101	*C3	R231	*C2
C205	E1	Q102	*C2	R232	*C2
C206	E2	Q201	*C2	R233	E1
C207	D2	Q202	*C2	R234	E2
C208	D2			R235	E2
C209	D2	R1	*B1	R301	E2
C210	*D2	R2	*B1	R302	E2
C211	*D2	R3	*B1	R303	E2
C212	*C2	R4	*B1	R304	E2
C213	*C2	R5	*B1	R305	D2
C214	*C2	R6	*B1	R306	D2
C215	*C2	R7	*B1	R307	D2
C301	E2	R8	*A3	R308	D2
C302	E2	R9	*A3	R309	*D2
C303	E2	R10	*A3	R310	*D2
C304	D2	R11	*A3	R311	*D2
C305	E2	R12	*A2	R333	E2
C306	E2	R13	*A2	R334	E2
C307	D2	R101	E1	R335	E2
C308	D2	R102	E1	R401	E3
C309	D2	R103	E1	R402	E3
C310	*D2	R104	E1	R403	E3
C401	E3	R105	D1	R404	E3
C402	E3	R106	D1	R405	D3
C403	E3	R107	D1	R406	D3
C404	D3	R108	D1	R407	D3
C405	E3	R109	*D2	R408	D3
C406	E3	R110	*D2	R409	*D2
C407	D3	R111	*D2	R410	*D2
C408	D3	R112	*C3	R411	*D2
C409	D3	R113	*C2	R433	E3
C410	*D2	R114	*C3	R434	E3
C501	B2	R115	*C2	R435	E3
C502	B2	R116	*C3	R501	B2
C503	A3	R117	*C3	R502	B2
		R118	*C3	R503	B2
CL1	B1	R119	*C3	R504	B2
		R120	*C2	R505	B2
CN101	A2	R121	*C2	R506	B2
CN102	E1	R122	*C2	R507	A3
CN103	E2	R123	*C2	R508	A3
CN104	E2	R124	C2	R509	A2
CN105	E3	R125	C2	R510	A3
CN106	*C2	R126	C2	R511	A2
CN107	*B2	R127	C2	R512	A2
		R133	E1		
E1	D1	R134	E1		
E2	*D1	R135	E1		
		R201	E2		
FB101	D1	R202	E2		

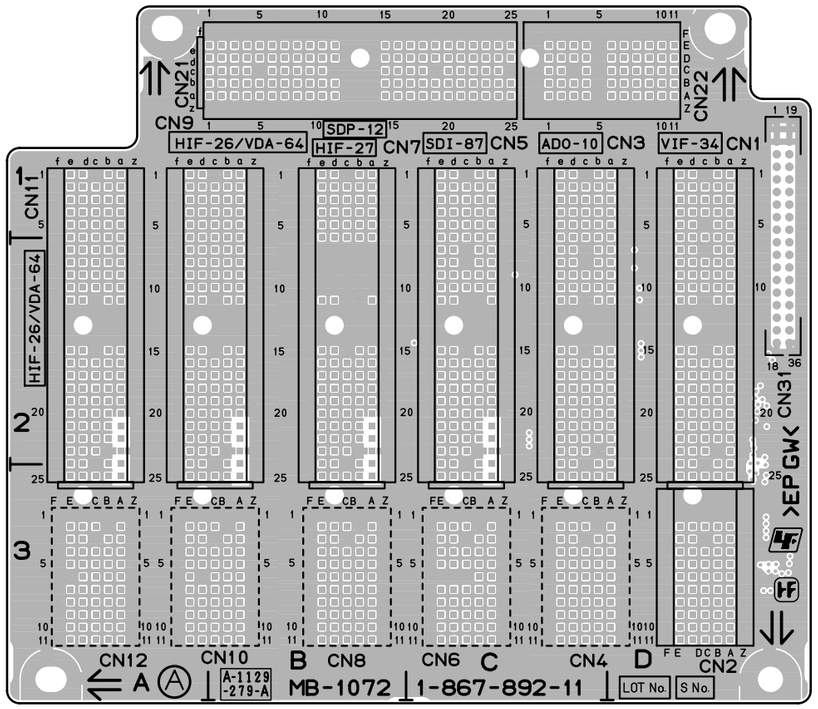

MB-1072
-A SIDE-
SUFFIX: -11, 31

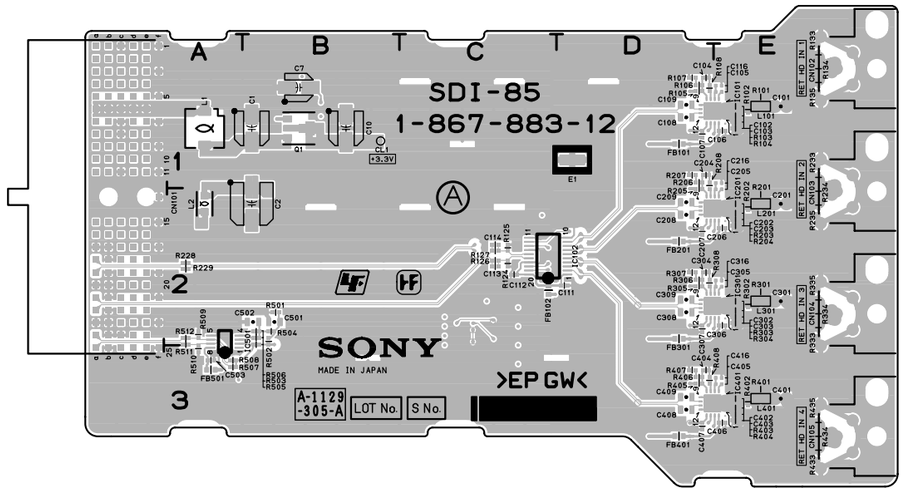

SDI-85 -A SIDE-
SUFFIX: -12, 32

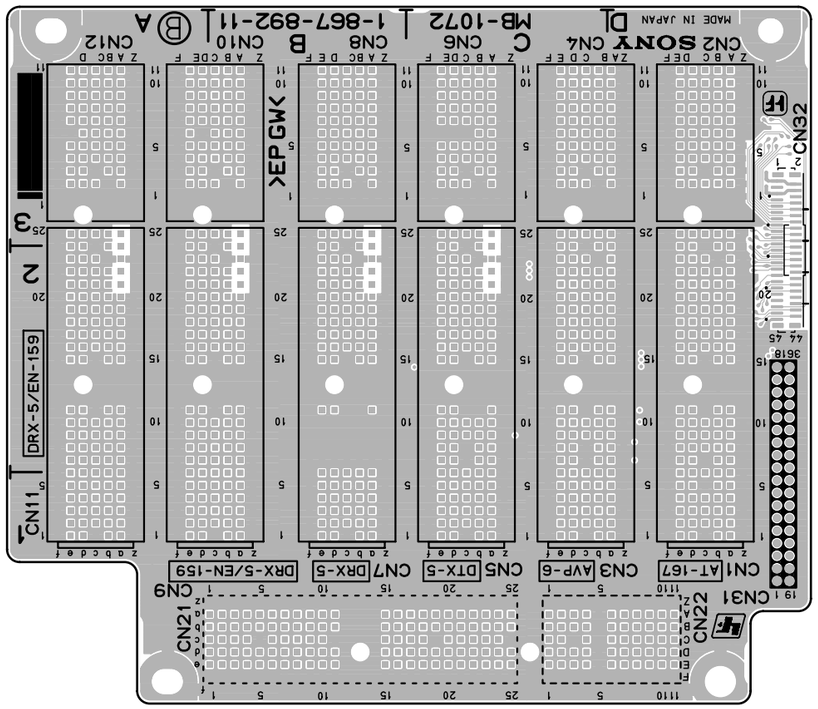

MB-1072
-B SIDE-
SUFFIX: -11, 31

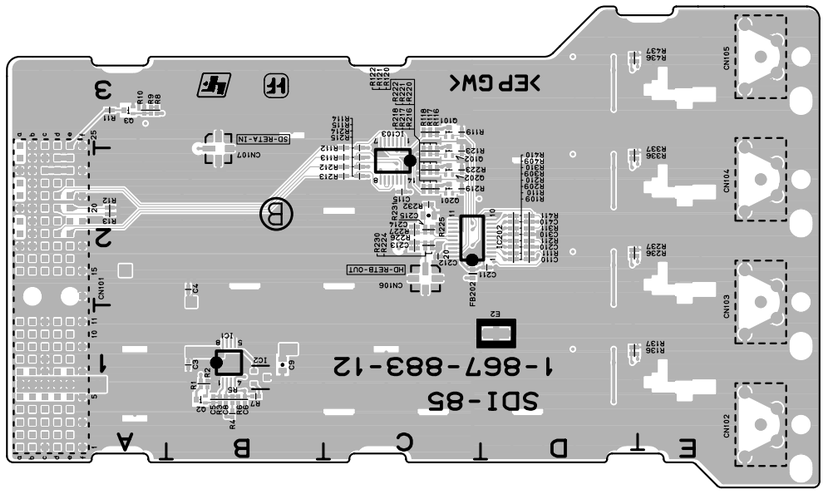

SDI-85 -B SIDE-
SUFFIX: -12, 32

```
-----------------------
SDI-85 (1-867-883-12, 32)
-----------------------

*:B SIDE

C1       B1    FB201    D2    R207     D1
C2       B2    FB202   *C2    R208     D1
C3      *B1    FB301    D2    R209    *D2
C4      *B2    FB401    D3    R210    *D2
C5      *B1    FB501    A3    R211    *D2
C6      *B1                   R212    *C2
C7       B1    IC1     *B1    R213    *C2
C8      *B1    IC2     *B1    R214    *C2
C9      *B1    IC101    D1    R215    *C2
C10      B1    IC102    D2    R216    *C2
C101     E1    IC103   *C3    R217    *C2
C102     E1    IC201    D2    R218    *C2
C103     E1    IC202   *D2    R219    *C2
C104     D1    IC301    D2    R220    *C2
C105     E1    IC401    D3    R221    *C2
C106     E1    IC501    A3    R222    *C2
C107     D1                   R223    *C2
C108     D1    L1       A1    R224    *C2
C109     D1    L2       A2    R225    *C2
C110    *D2    L101     E1    R226    *C2
C111     D2    L201     E2    R227    *C2
C112     C2    L301     E2    R228     A2
C113     C2    L401     E3    R229     A2
C114     C2                   R230    *C2
C115    *C2    Q1       B1    R231    *C2
C116     E1    Q2      *B1    R232    *C2
C201     E2    Q3      *A3    R233     E1
C202     E2    Q101    *C3    R234     E2
C203     E2    Q102    *C2    R235     E2
C204     D1    Q201    *C2    R236    *D2
C205     E2    Q202    *C2    R237    *D2
C206     E2                   R301     E2
C207     D2    R1      *B1    R302     E2
C208     D2    R2      *B1    R303     E2
C209     D2    R3      *B1    R304     E2
C210    *D2    R4      *B1    R305     D2
C211    *D2    R5      *B1    R306     D2
C212    *C2    R6      *B1    R307     D2
C213    *C2    R7      *B1    R308     D2
C214    *C2    R8      *A3    R309    *D2
C215    *C2    R9      *A3    R310    *D2
C216     E1    R10     *A3    R311    *D2
C301     E2    R11     *A3    R333     E2
C302     E2    R12     *A2    R334     E2
C303     E2    R13     *A2    R335     E2
C304     D2    R101     E1    R336    *D2
C305     E2    R102     E1    R337    *D2
C306     E2    R103     E1    R401     E3
C307     D2    R104     E1    R402     E3
C308     D2    R105     D1    R403     E3
C309     D2    R106     D1    R404     E3
C310    *D2    R107     D1    R405     D3
C316     E2    R108     D1    R406     D3
C401     E3    R109    *D2    R407     D3
C402     E3    R110    *D2    R408     D3
C403     E3    R111    *D2    R409    *D2
C404     D3    R112    *C3    R410    *D2
C405     E3    R113    *C2    R411    *D2
C406     E3    R114    *C3    R433     E3
C407     D3    R115    *C2    R434     E3
C408     D3    R116    *C3    R435     E3
C409     D3    R117    *C3    R436    *D3
C410    *D2    R118    *C3    R437    *D3
C416     E3    R119    *C3    R501     B2
C501     B2    R120    *C2    R502     B2
C502     B2    R121    *C2    R503     B2
C503     A3    R122    *C2    R504     B2
                 R123    *C2    R505     B2
CL1      B1    R124     C2    R506     B2
                 R125     C2    R507     A3
CN101    A2    R126     C2    R508     A3
CN102    E1    R127     C2    R509     A2
CN103    E2    R133     E1    R510     A3
CN104    E2    R134     E1    R511     A2
CN105    E3    R135     E1    R512     A2
CN106   *C2    R136    *D1
CN107   *B2    R137    *D1
                 R201     E2
E1       D1    R202     E2
E2      *D1    R203     E2
                 R204     E2
FB101    D1    R205     D2
FB102    C2    R206     D1
```

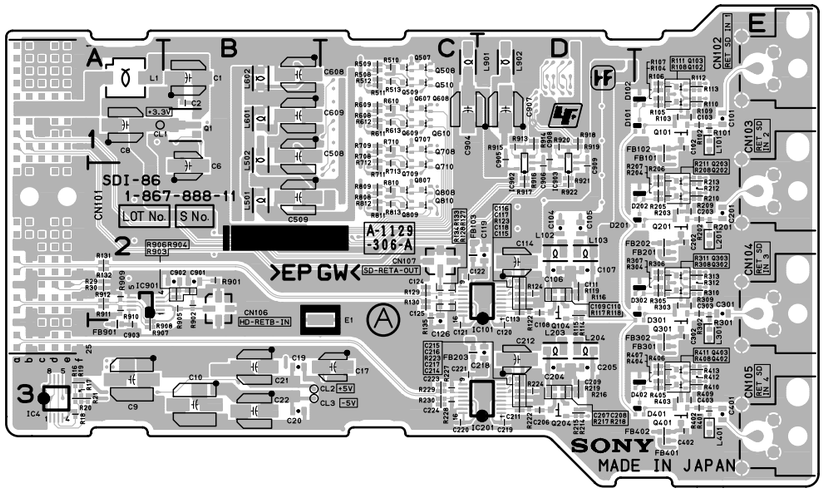

SDI-86 -A SIDE-
SUFFIX: -11, 31

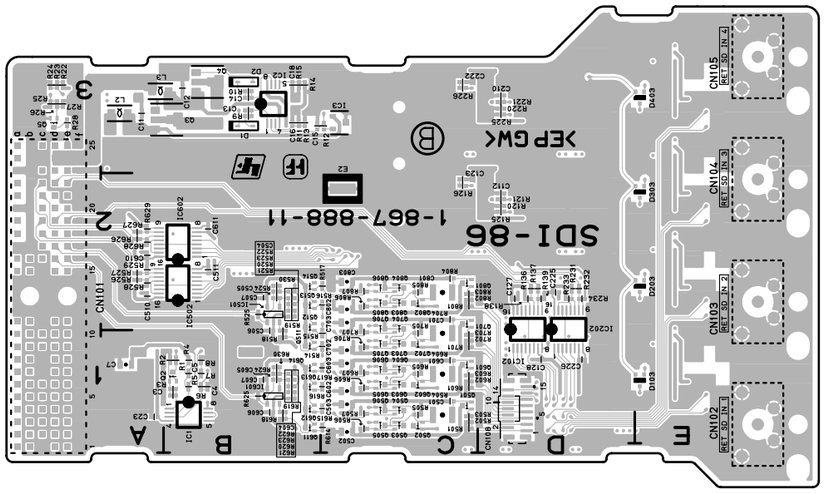

SDI-86 -B SIDE-
SUFFIX: -11, 31

SDI-86 (1-867-888-11, 31)
---

*:B SIDE

C1	B1	C401	E3	FB302	E3	Q608	C1	R122	D2	R502	*C1	R808	C2
C2	B1	C402	E3	FB401	E3	Q609	C1	R123	D2	R503	*C1	R809	C2
C3	*B1	C403	E3	FB402	E3	Q610	C1	R124	D2	R504	*C1	R810	C2
C4	*B1	C501	*C1	FB901	A3	Q611	*B1	R125	*D2	R505	*C1	R811	C2
C5	*B1	C502	*C1			Q612	*B1	R126	*C2	R506	*C1	R812	C2
C6	B2	C503	*C1	IC1	*B1	Q613	*B1	R127	C2	R507	*C1	R813	C2
C7	*A1	C504	*B2	IC2	*B3	Q614	*B1	R128	C2	R508	C1	R901	B2
C8	A1	C505	*B2	IC3	*C3	Q701	*C2	R129	C2	R509	C1	R902	B2
C9	A3	C506	*B1	IC4	A3	Q702	*C1	R130	C2	R510	C1	R903	B2
C10	B3	C507	*B2	IC101	D2	Q703	*C1	R131	A2	R511	C1	R904	B2
C11	*A3	C508	B1	IC102	*D1	Q704	*C2	R132	A2	R512	C1	R905	B2
C12	*B3	C509	B2	IC201	D3	Q705	*C1	R133	C2	R513	C1	R906	B2
C13	*B3	C510	*A2	IC202	*D1	Q706	*C2	R134	C2	R514	*C1	R907	A3
C14	*B3	C511	*B2	IC501	*B2	Q707	C1	R135	C2	R515	*C1	R908	A3
C15	*B3	C601	*C1	IC502	*B2	Q708	C1	R136	*D2	R516	*C2	R909	A2
C16	*B3	C602	*C1	IC601	*B1	Q709	C2	R137	*D2	R517	*C2	R910	A2
C17	C3	C603	*C1	IC602	*B2	Q710	C2	R138	*D2	R518	*B1	R911	A2
C18	*B3	C604	*B1	IC901	A2	Q801	*C2	R139	*D2	R519	*B1	R912	A2
C19	B3	C605	*B1	IC902	D2	Q802	*C2	R201	E2	R520	*B2	R913	D1
C20	B3	C606	*B1	IC903	D2	Q803	*C2	R202	E2	R521	*B2	R914	D1
C21	B3	C607	*B1			Q804	*C2	R203	E2	R522	*B2	R915	D1
C22	B3	C608	B1	L1	A1	Q805	*C2	R204	E2	R523	*B2	R916	D2
C23	*A1	C609	B1	L2	*A3	Q806	*C2	R205	E2	R524	*B2	R917	D2
C101	E1	C610	*A2	L3	*A3	Q807	C2	R206	E2	R525	*B2	R918	D1
C102	E1	C611	*B2	L101	E1	Q808	C2	R207	E2	R526	*A2	R919	D1
C103	E1	C701	*C1	L102	D2	Q809	C2	R208	E2	R527	*A2	R920	D1
C104	D2	C702	*C1	L103	D2	Q810	C2	R209	E2	R528	*A2	R921	D2
C105	D2	C703	*C2	L201	E2			R210	E2	R529	*A2	R922	D2
C106	D2	C801	*C2	L203	D3	R1	*B1	R211	E2	R530	*B2		
C107	D2	C802	*C2	L204	D3	R2	*B1	R212	E2	R601	*C1		
C108	D2	C803	*C2	L301	E3	R3	*B1	R213	E2	R602	*C1		
C109	D2	C901	B2	L401	E3	R4	*B1	R214	D3	R603	*C1		
C110	D2	C902	B2	L501	B2	R5	*B1	R215	D3	R604	*C1		
C111	D2	C903	A3	L502	B1	R6	*B1	R216	D3	R605	*C1		
C112	*D2	C904	C1	L601	B1	R7	*B1	R217	D3	R606	*C1		
C113	D2	C905	D1	L602	B1	R8	*B1	R218	D3	R607	*C1		
C114	D2	C906	D2	L901	C1	R9	*B3	R219	D3	R608	C1		
C115	D2	C907	D1	L902	D1	R10	*B3	R220	*D3	R609	C1		
C116	D2	C908	D1			R11	*B3	R221	*D3	R610	C1		
C117	D2	C909	D2	Q1	B1	R12	*C3	R222	D3	R611	C1		
C118	D2			Q2	*B1	R13	*B3	R223	D3	R612	C1		
C119	D2	CL1	A1	Q3	*B3	R14	*B3	R224	D3	R613	C1		
C120	D3	CL2	B3	Q4	*B3	R15	*B3	R225	*D3	R614	*C1		
C121	C3	CL3	B3	Q5	*A3	R16	A3	R226	*C3	R615	*C1		
C122	C2			Q101	E1	R17	A3	R227	C3	R616	*C1		
C123	*C2	CN101	A2	Q102	E1	R18	A3	R228	C3	R617	*C1		
C124	C2	CN102	E1	Q103	E1	R19	A3	R229	C3	R618	*B1		
C125	C2	CN103	E2	Q104	D2	R20	A3	R230	C3	R619	*B1		
C126	C3	CN104	E2	Q201	E2	R21	A3	R231	*D2	R620	*B1		
C127	*D2	CN105	E3	Q202	E2	R22	*A3	R232	*D2	R621	*B1		
C128	*D1	CN106	B2	Q203	E2	R23	*A3	R233	*D2	R622	*B1		
C201	E2	CN107	C2	Q204	D3	R24	*A3	R234	*D2	R623	*B1		
C202	E2	CN108	*D1	Q301	E3	R25	*A3	R301	E2	R624	*B1		
C203	E2			Q302	E2	R26	*A3	R302	E2	R625	*B1		
C204	D3	D1	*B3	Q303	E2	R27	*A3	R303	E2	R626	*A2		
C205	D3	D2	*B3	Q401	E3	R28	*A3	R304	E2	R627	*A2		
C206	D3	D101	E1	Q402	E3	R29	A2	R305	E2	R628	*A2		
C207	D3	D102	E1	Q403	E3	R30	A2	R306	E2	R629	*A2		
C208	D3	D103	*E1	Q501	*C1	R101	E1	R307	E2	R630	*B1		
C209	D3	D201	E2	Q502	*C1	R102	E1	R308	E2	R701	*C1		
C210	*D3	D202	E2	Q503	*C1	R103	E1	R309	E2	R702	*C1		
C211	D3	D203	*E2	Q504	*C1	R104	E1	R310	E2	R703	*C1		
C212	D3	D301	E2	Q505	*C1	R105	E1	R311	E2	R704	*C2		
C214	D3	D302	E2	Q506	*C1	R106	E1	R312	E2	R705	*C1		
C215	D3	D303	*E2	Q507	C1	R107	E1	R313	E2	R706	*C1		
C216	D3	D401	E3	Q508	C1	R108	E1	R401	E3	R707	*C1		
C217	D3	D402	E3	Q509	C1	R109	E1	R402	E3	R708	C1		
C218	D3	D403	*E3	Q510	C1	R110	E1	R403	E3	R709	C1		
C219	D3			Q511	*B1	R111	E1	R404	E3	R710	C1		
C220	C3	E1	B3	Q512	*B2	R112	E1	R405	E3	R711	C2		
C221	C3	E2	*C2	Q513	*B2	R113	E1	R406	E3	R712	C1		
C222	*C3			Q514	*B2	R114	D2	R407	E3	R713	C2		
C223	C3	FB101	E1	Q601	*C1	R115	D2	R408	E3	R801	*C2		
C224	C3	FB102	E1	Q602	*C1	R116	D2	R409	E3	R802	*C2		
C225	*D2	FB103	C2	Q603	*C1	R117	D2	R410	E3	R803	*C2		
C226	*D1	FB201	E2	Q604	*C1	R118	D2	R411	E3	R804	*C2		
C301	E2	FB202	E2	Q605	*C1	R119	D2	R412	E3	R805	*C2		
C302	E3	FB203	C3	Q606	*C1	R120	*D2	R413	E3	R806	*C2		
C303	E2	FB301	E3	Q607	C1	R121	*D2	R501	*C1	R807	*C2		

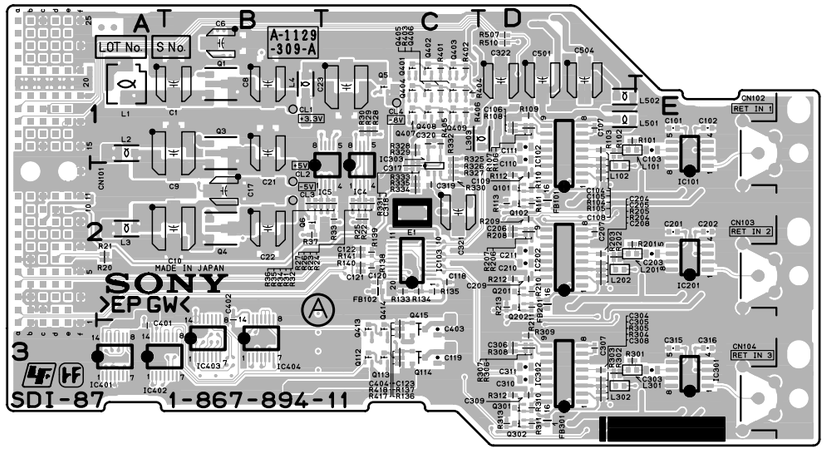

SDI-87 -A SIDE-
SUFFIX: -11, 31

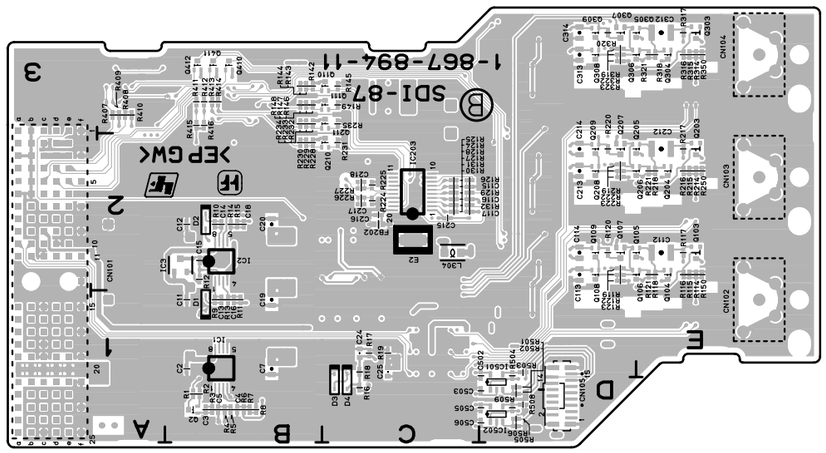

SDI-87 -B SIDE-
SUFFIX: -11, 31

SDI-87 (1-867-894-11, 31)
---

*:B SIDE

C1	B1	C318	C2	Q5	C1	R30	C1	R224	*C2
C2	*B1	C319	C2	Q6	B2	R31	C2	R225	*C2
C3	*B1	C320	C1	Q101	D2	R32	C2	R226	*C2
C4	*B1	C321	C2	Q102	D2	R33	C2	R227	*C2
C5	*B1	C322	D1	Q103	*E2	R34	B2	R228	*B2
C6	B1	C401	A3	Q104	*E2	R35	B2	R229	*B2
C7	*B1	C402	B3	Q105	*D2	R36	B2	R230	*B2
C8	B1	C403	C3	Q106	*D2	R37	B2	R231	*C2
C9	B1	C404	C3	Q107	*D2	R101	D1	R232	*B3
C10	B2	C501	D1	Q108	*D2	R102	D1	R233	*B3
C11	*B1	C502	*D1	Q109	*D2	R103	D1	R234	*B3
C12	*B2	C503	*D1	Q110	*C3	R104	D2	R235	*C3
C13	*B1	C504	D1	Q111	*C3	R105	D2	R250	*E2
C14	*B2	C505	*D1	Q112	C3	R106	D1	R301	D3
C15	*B2	C506	*D1	Q113	C3	R107	D1	R302	D3
C16	*B1			Q114	C3	R108	D1	R303	D3
C17	B2	CL1	B1	Q201	D2	R109	D1	R304	D3
C18	*B2	CL2	B2	Q202	D2	R110	D2	R305	D3
C19	*B1	CL3	B2	Q203	*E2	R111	D2	R306	D3
C20	*B2	CL4	C1	Q204	*E2	R112	D2	R307	D3
C21	B1			Q205	*D2	R113	D2	R308	D3
C22	B2	CN101	A2	Q206	*D2	R114	*E2	R309	D3
C23	C1	CN102	E1	Q207	*D2	R115	*E2	R310	D3
C24	*C1	CN103	E2	Q208	*D2	R116	*E2	R311	D3
C25	*C1	CN104	E3	Q209	*D2	R117	*E2	R312	D3
C101	E1	CN105	*D1	Q210	*C2	R118	*E2	R313	D3
C102	E1			Q211	*C3	R119	*D2	R314	*E3
C103	E1	D1	*B1	Q301	D3	R120	*D2	R315	*E3
C104	D1	D2	*B2	Q302	D3	R121	*E2	R316	*E3
C105	D1	D3	*C1	Q303	*E3	R122	*D2	R317	*E3
C106	D1	D4	*C1	Q304	*E3	R123	*D2	R318	*E3
C107	D1			Q305	*D3	R124	*C2	R319	*D3
C108	D2	E1	C2	Q306	*D3	R125	*C2	R320	*D3
C109	D2	E2	*C2	Q307	*D3	R126	*C2	R321	*E3
C110	D1			Q308	*D3	R127	*C2	R322	*D3
C111	D1	FB101	D2	Q309	*D3	R128	*C2	R323	*D3
C112	*E2	FB102	C2	Q401	C1	R129	*C2	R325	C1
C113	*D2	FB201	D2	Q402	C1	R130	*C2	R326	C2
C114	*D2	FB202	*C2	Q403	C1	R131	*C2	R327	C2
C115	*C2	FB301	D3	Q404	C1	R132	*C2	R328	C1
C116	*C2			Q405	C1	R133	C2	R329	C1
C117	*C2	IC1	*B1	Q406	C1	R134	C2	R330	C2
C118	C2	IC2	*B2	Q407	C1	R135	C2	R331	C2
C119	C3	IC3	*B2	Q408	C1	R136	C3	R332	C1
C120	C2	IC4	C2	Q409	C1	R137	C3	R333	C2
C121	C2	IC5	B2	Q410	*B3	R138	C2	R334	C2
C122	C2	IC101	E2	Q411	*B3	R139	C2	R335	C2
C123	C3	IC102	D2	Q412	*B3	R140	C2	R350	*E3
C201	E2	IC103	C2	Q413	C3	R141	C2	R401	C1
C202	E2	IC201	E2	Q414	C3	R142	*B3	R402	C1
C203	E2	IC202	D2	Q415	C3	R143	*B3	R403	C1
C204	D2	IC203	*C2			R144	*B3	R404	C1
C205	D2	IC301	E3	R1	*B1	R145	*C3	R405	C1
C206	D2	IC302	D3	R2	*B1	R146	*B3	R406	C1
C207	D2	IC303	C2	R3	*B1	R147	*B3	R407	*A3
C208	D2	IC401	A3	R4	*B1	R148	*B3	R408	*A3
C209	D2	IC402	A3	R5	*B1	R149	*C3	R409	*A3
C210	D2	IC403	B3	R6	*B1	R150	*E2	R410	*A3
C211	D2	IC404	B3	R7	*B1	R201	D2	R411	*B3
C212	*E2	IC501	*D1	R8	*B1	R202	D2	R412	*B3
C213	*D2	IC502	*D1	R9	*B1	R203	D2	R413	*B3
C214	*D2			R10	*B2	R204	D2	R414	*B3
C215	*C2	L1	A1	R11	*B1	R205	D2	R415	*B3
C216	*C2	L2	A1	R12	*B2	R206	D2	R416	*B3
C217	*C2	L3	A2	R13	*B1	R207	D2	R417	C3
C218	*C2	L4	B1	R14	*B2	R208	D2	R418	C3
C303	E3	L101	D1	R15	*B2	R209	D2	R501	*D1
C304	D3	L102	D2	R16	*C1	R210	D2	R502	*D1
C305	D3	L201	D2	R17	*C1	R211	D2	R503	*D1
C306	D3	L202	D2	R18	*C1	R212	D2	R504	*D1
C307	D3	L301	D3	R19	*C1	R213	D2	R505	*D1
C308	D3	L302	D3	R20	A2	R214	*E2	R506	*D1
C309	D3	L303	D1	R21	A2	R215	*E2	R507	D1
C310	D3	L304	*C2	R22	C2	R216	*E2	R508	*D1
C311	D3	L501	D1	R23	C2	R217	*E2	R509	*D1
C312	*E3	L502	D1	R24	C2	R218	*E2	R510	D1
C313	*D3			R25	C2	R219	*D2		
C314	*D3	Q1	B1	R26	C2	R220	*D2		
C315	E3	Q2	*B1	R27	C2	R221	*E2		
C316	E3	Q3	B1	R28	C1	R222	*D2		
C317	C2	Q4	B2	R29	C1	R223	*D2		

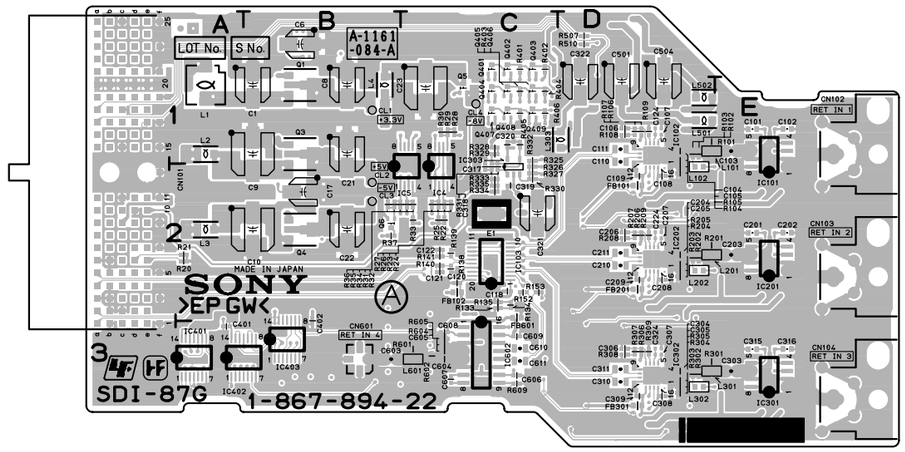

SDI-87G -A SIDE-
SUFFIX: -22, 32

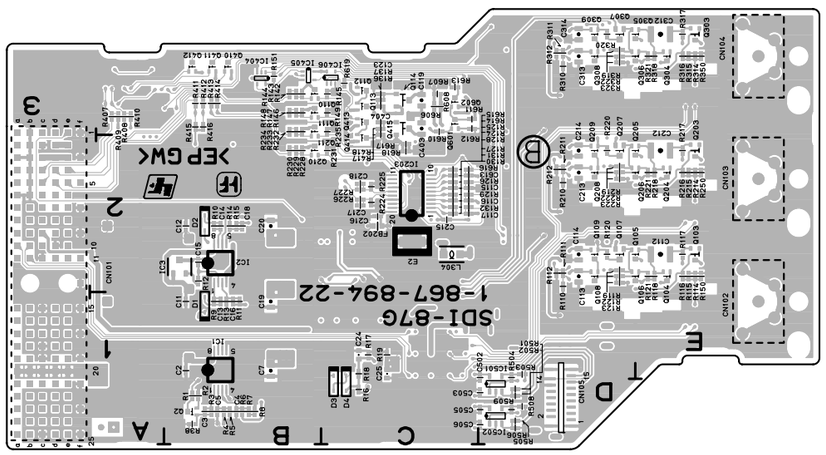

SDI-87G -B SIDE-
SUFFIX: -22, 32

SDI-87G (1-867-894-22, 32)
---

*:B SIDE

C1	B1	C316	E3	L2	A1	R15	*B2	R206	D2	R418	*C3
C2	*B1	C317	C2	L3	A2	R16	*C1	R207	D2	R501	*D1
C3	*B1	C318	C2	L4	B1	R17	*C1	R208	D2	R502	*D1
C4	*B1	C319	C2	L101	D1	R18	*C1	R209	D2	R503	*D1
C5	*B1	C320	C1	L102	D2	R19	*C1	R210	*D2	R504	*D1
C6	B1	C321	C2	L201	D2	R20	A2	R211	*D2	R505	*D1
C7	*B1	C322	D1	L202	D2	R21	A2	R212	*D2	R506	*D1
C8	B1	C324	D3	L301	D3	R22	C2	R214	*E2	R507	D1
C9	B1	C401	A3	L302	D3	R23	C2	R215	*E2	R508	*D1
C10	B2	C402	B3	L303	D1	R24	C2	R216	*E2	R509	*D1
C11	*B1	C403	*C3	L304	*C2	R25	C2	R217	*E2	R510	D1
C12	*B2	C404	*C3	L501	D1	R26	C2	R218	*E2	R601	C3
C13	*B1	C501	D1	L502	D1	R27	C2	R219	*D2	R602	C3
C14	*B2	C502	*D1	L601	C3	R28	C1	R220	*D2	R604	C3
C15	*B2	C503	*D1			R29	C1	R221	*E2	R605	C3
C16	*B1	C504	D1	Q1	B1	R30	C1	R222	*D2	R606	*C3
C17	B2	C505	*D1	Q2	*B1	R31	C2	R223	*D2	R607	*C3
C18	*B2	C506	*D1	Q3	B1	R32	C2	R224	*C2	R608	*C3
C19	*B1	C603	B3	Q4	B2	R33	C2	R225	*C2	R609	C3
C20	*B2	C604	C3	Q5	C1	R34	B2	R226	*C2	R610	*C3
C21	B1	C605	C3	Q6	B2	R35	B2	R227	*C2	R611	*C3
C22	B2	C606	C3	Q103	*E2	R36	B2	R228	*B2	R612	*C3
C23	C1	C607	C3	Q104	*E2	R37	B2	R229	*B2	R613	*C3
C24	*C1	C608	C3	Q105	*D2	R38	*B1	R230	*B2	R614	*C2
C25	*C1	C609	C3	Q106	*D2	R101	D1	R231	*C2	R615	*C2
C101	E1	C610	C3	Q107	*D2	R102	D1	R232	*B3	R616	*C2
C102	E1	C611	C3	Q108	*D2	R103	D1	R233	*B3	R617	*C2
C103	E1	C613	*C2	Q109	*D2	R104	D2	R234	*B3	R618	*C2
C104	D1			Q110	*B3	R105	D2	R235	*C3	R619	*C3
C105	D1	CL1	B1	Q111	*B3	R106	D1	R250	*E2		
C106	D1	CL2	B2	Q112	*C3	R107	D1	R301	D3		
C107	D1	CL3	B2	Q113	*C3	R108	D1	R302	D3		
C108	D2	CL4	C1	Q114	*C3	R109	D1	R303	D3		
C109	D2			Q203	*E2	R110	*D2	R304	D3		
C110	D1	CN101	A2	Q204	*E2	R111	*D2	R305	D3		
C111	D1	CN102	E1	Q205	*D2	R112	*D2	R306	D3		
C112	*E2	CN103	E2	Q206	*D2	R114	*E2	R307	D3		
C113	*D2	CN104	E3	Q207	*D2	R115	*E2	R308	D3		
C114	*D2	CN105	*D1	Q208	*D2	R116	*E2	R309	D3		
C115	*C2	CN601	B3	Q209	*D2	R117	*E2	R310	*D3		
C116	*C2			Q210	*B2	R118	*E2	R311	*D3		
C117	*C2	D1	*B1	Q211	*B3	R119	*D2	R312	*D3		
C118	C2	D2	*B2	Q303	*E3	R120	*D2	R314	*E3		
C119	*C3	D3	*C1	Q304	*E3	R121	*E2	R315	*E3		
C120	C2	D4	*C1	Q305	*D3	R122	*D2	R316	*E3		
C121	C2			Q306	*D3	R123	*D2	R317	*E3		
C122	C2	E1	C2	Q307	*D3	R124	*C2	R318	*E3		
C123	*C3	E2	*C2	Q308	*D3	R125	*C2	R319	*D3		
C124	D1			Q309	*D3	R126	*C2	R320	*D3		
C201	E2	FB101	D2	Q401	C1	R127	*C2	R321	*E3		
C202	E2	FB102	C2	Q402	C1	R128	*C2	R322	*D3		
C203	E2	FB201	D2	Q403	C1	R129	*C2	R323	*D3		
C204	D2	FB202	*C2	Q404	C1	R130	*C2	R325	C1		
C205	D2	FB301	D3	Q405	C1	R131	*C2	R326	C2		
C206	D2	FB601	C2	Q406	C1	R132	*C2	R327	C2		
C207	D2			Q407	C1	R133	C2	R328	C1		
C208	D2	IC1	*B1	Q408	C1	R134	C2	R329	C1		
C209	D2	IC2	*B2	Q409	C1	R135	C2	R330	C2		
C210	D2	IC3	*B2	Q410	*B3	R136	*C3	R331	C2		
C211	D2	IC4	C2	Q411	*B3	R137	*C3	R332	C1		
C212	*E2	IC5	B2	Q412	*B3	R138	C2	R333	C2		
C213	*D2	IC101	E2	Q413	*C3	R139	C2	R334	C2		
C214	*D2	IC102	D1	Q414	*C2	R140	C2	R335	C2		
C215	*C2	IC103	C2	Q415	*C3	R141	C2	R350	*E3		
C216	*C2	IC201	E2	Q601	*C3	R142	*B3	R401	C1		
C217	*C2	IC202	D2	Q602	*C3	R143	*B3	R402	C1		
C218	*C2	IC203	*C2			R144	*B3	R403	C1		
C224	D2	IC301	E3	R1	*B1	R145	*C3	R404	C1		
C303	E3	IC302	D3	R2	*B1	R146	*B3	R405	C1		
C304	D3	IC303	C2	R3	*B1	R147	*B3	R406	C1		
C305	D3	IC401	A3	R4	*B1	R148	*B3	R407	*A3		
C306	D3	IC402	A3	R5	*B1	R149	*C3	R408	*A3		
C307	D3	IC403	B3	R6	*B1	R150	*E2	R409	*A3		
C308	D3	IC404	*B3	R7	*B1	R151	*B3	R410	*A3		
C309	D3	IC405	*B3	R8	*B1	R152	C2	R411	*B3		
C310	D3	IC406	*C3	R9	*B1	R153	C2	R412	*B3		
C311	D3	IC501	*D1	R10	*B2	R201	D2	R413	*B3		
C312	*E3	IC502	*D1	R11	*B1	R202	D2	R414	*B3		
C313	*D3	IC602	C3	R12	*B2	R203	D2	R415	*B3		
C314	*D3			R13	*B1	R204	D2	R416	*B3		
C315	E3	L1	A1	R14	*B2	R205	D2	R417	*C3		

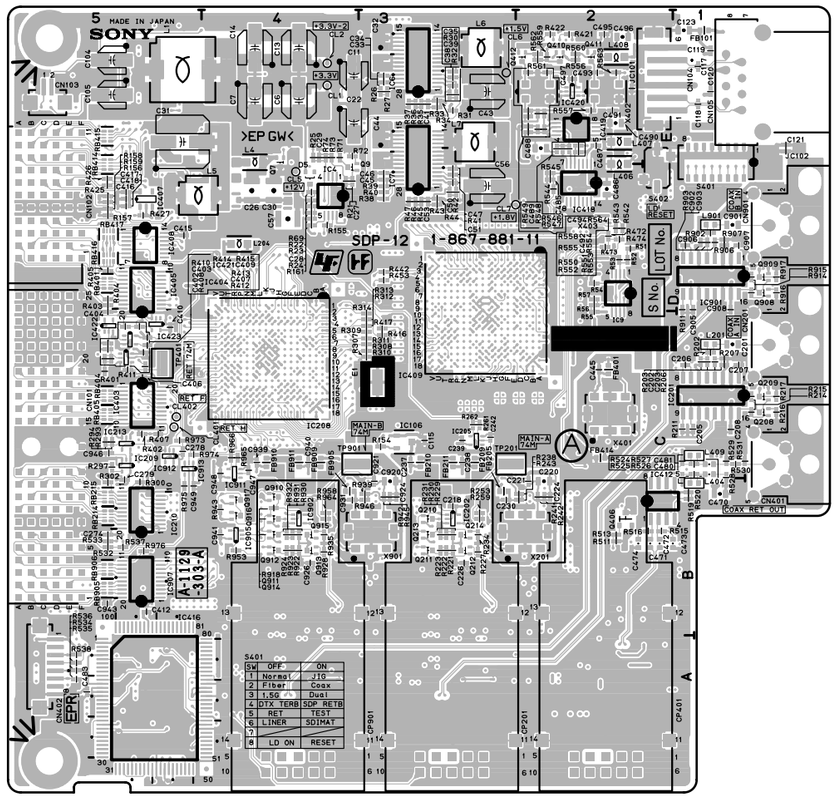

SDP-12 -A SIDE-
SUFFIX: -11, 12

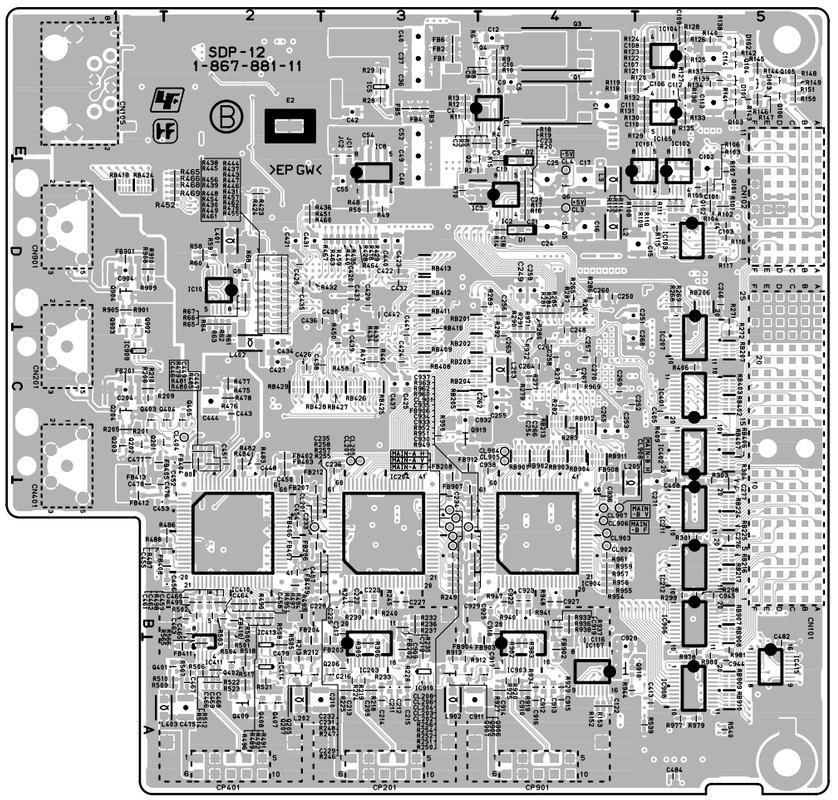

SDP-12 -B SIDE-
SUFFIX: -11, 12

SDP-12 (1-867-881-11, 12)
---

*:B SIDE

C1	*E4	C211	*A3	C435	*D2	C928	*A4	FB211	C3	IC912	C5	R1	*E4	R117	*D5	R250	*B3	R440	*D3	R530	C1	R958	B4
C2	*E3	C212	*A3	C436	*C3	C929	*B3	FB212	*C2	IC913	C5	R2	*D3	R118	*E4	R251	*B3	R441	*C3	R531	C1	R959	*B4
C3	*E4	C213	*A3	C437	*C3	C930	*B3	FB401	C2			R3	*E4	R119	*E4	R252	*B3	R442	D3	R532	B5	R960	*B3
C4	*E3	C214	*A3	C438	*C3	C931	B4	FB402	*C2	JC1	*E3	R4	*E4	R120	*E5	R253	B3	R443	*D2	R533	B5	R961	*B4
C5	*E4	C215	*A3	C439	*C3	C932	*C3	FB403	*C2	JC2	*E3	R5	*E4	R121	*E5	R254	*B3	R444	*D2	R534	A5	R962	*B3
C6	E4	C216	*A3	C440	*D3	C933	*B3	FB404	*C2	JC101	E2	R6	*E3	R122	*E5	R255	*B2	R445	*D2	R535	A5	R963	*B3
C7	E4	C217	*B3	C441	*C3	C934	*B3	FB405	*C1	JC102	E1	R7	*E4	R123	*E5	R256	*B3	R446	*D2	R536	A5	R964	B4
C8	*E4	C218	B3	C442	*C3	C935	*B3	FB406	*B2			R8	*E4	R124	*E5	R257	*B2	R447	*D2	R537	B5	R965	C4
C9	*E4	C219	*B3	C443	*C2	C936	*B4	FB407	*B2	L1	E5	R9	*E4	R125	*E5	R258	*B2	R448	*D2	R538	A5	R966	C4
C10	*E4	C220	B2	C444	*C2	C937	*B3	FB408	*B2	L2	*D4	R10	*E4	R126	*E5	R259	B3	R449	*C2	R539	*A5	R969	*C4
C11	E4	C221	B2	C445	C2	C938	*C4	FB409	*B2	L3	*D4	R11	*E3	R127	*E5	R261	C3	R450	*C3	R540	*A5	R971	*C4
C12	*E4	C222	*B3	C446	*C2	C939	C4	FB410	*B2	L4	E4	R12	*E3	R128	*E5	R262	C3	R451	*D2	R542	D2	R972	*C4
C13	E4	C223	*B3	C447	*C2	C940	C4	FB411	*A2	L5	D5	R13	*E3	R129	*E5	R264	*D4	R452	*D2	R543	D2	R973	C5
C14	E4	C224	B2	C448	*C2	C941	B4	FB412	*B1	L6	E3	R14	*D4	R130	*E5	R265	*D4	R453	D3	R544	D2	R974	C5
C15	*D5	C225	*B3	C449	*C2	C943	B5	FB413	*C1	L7	E3	R15	*E4	R131	*E5	R268	*D5	R454	*D2	R545	D2	R975	B5
C16	*D4	C226	B3	C450	*C2	C944	*A5	FB414	C2	L201	C1	R16	*D4	R132	*E5	R269	*D5	R455	*C2	R546	E2	R976	B5
C17	*D4	C227	*B3	C451	*C2	C945	*B5	FB901	*D1	L202	*A2	R17	*D4	R133	*E5	R271	*C5	R456	*D2	R547	E2	R977	*A5
C18	*D4	C228	*B2	C452	*C2	C946	C5	FB902	*A4	L203	*C4	R18	*D4	R134	*E5	R272	*C5	R457	*D2	R548	E2	R978	*A5
C19	*E4	C229	*B2	C453	*B1	C947	C4	FB903	*A4	L204	D4	R19	*D4	R135	*E5	R277	*C4	R458	*C3	R549	E2	R979	*A5
C20	*D4	C230	B3	C454	*B2	C948	C4	FB904	*A3	L205	*B4	R20	*D4	R136	*E5	R278	*C4	R459	*D3	R550	E2	R980	*A5
C21	*D4	C231	*B2	C455	*B1	C949	B5	FB905	B4	L401	*D2	R21	D4	R137	*E5	R279	*C4	R460	*D2	R551	E2	R981	*A5
C22	E4	C232	*B2	C456	*B2			FB906	*B3	L402	*C2	R22	D4	R138	*E5	R280	*C4	R461	*C2	R552	E2	R982	*A4
C23	*D4	C233	*B2	C457	*B2	CL1	E4	FB907	*B3	L403	*A1	R23	D4	R139	*E5	R281	*C4	R462	*C2	R553	E2	R983	*A4
C24	*D4	C234	*B3	C458	*B2	CL2	E4	FB908	*C4	L404	B1	R24	D4	R140	*E5	R282	*C4	R463	*D3	R554	E2		
C25	*D4	C235	*B2	C459	*B2	CL3	*D4	FB909	C4	L406	E2	R25	E4	R141	*E5	R283	*C4	R464	*D3	R555	E2	RB201	*C3
C26	D4	C236	*C3	C460	*B2	CL4	*D4	FB910	C4	L407	E2	R26	E3	R142	*E5	R284	*C4	R465	*D2	R556	E2	RB202	*C3
C27	D4	C237	C3	C461	*B2	CL5	D4	FB911	C4	L408	E2	R27	E3	R143	*E5	R285	*C4	R466	*D2	R557	E2	RB203	*C3
C28	D4	C238	C3	C462	*B2	CL6	E3	FB912	*C3	L409	C1	R28	*E3	R144	*E5	R286	*D4	R467	*D3	R558	E2	RB204	*C3
C29	E4	C239	C3	C463	*B2	CL7	D2			L901	D1	R29	*E3	R145	*E5	R287	*C4	R468	*D2	R559	E2	RB205	*C3
C30	D4	C242	C3	C464	*B2	CL201	*B2	IC1	*E4	L902	*A3	R30	E3	R146	*E5	R289	*D4	R469	*D2	R560	E2	RB206	*D5
C31	E5	C246	*D5	C465	*B2	CL202	*B3	IC2	*D4			R31	E3	R147	*E5	R290	*C4	R470	*C2	R561	E2	RB207	*C5
C32	E3	C248	*C4	C466	*A2	CL203	*B3	IC3	*D3	Q1	*E4	R32	E3	R148	*E5	R291	*C4	R471	*C3	R562	E2	RB213	*C4
C33	E3	C249	*D4	C467	*A2	CL204	*B3	IC4	D4	Q2	*E4	R33	E3	R149	*E5	R292	*C4	R472	D2	R563	E2	RB214	B5
C34	E3	C250	*D4	C468	*A2	CL205	*C3	IC5	*E3	Q3	*E4	R34	E3	R150	*E5	R293	C5	R473	D2	R564	E2	RB215	B5
C35	E3	C251	*C4	C469	*A2	CL206	*B3	IC6	E3	Q4	*E4	R35	E3	R151	*E5	R294	C5	R474	D2	R565	*A2	RB216	*B5
C36	*E3	C252	*C4	C470	B1	CL207	*C3	IC7	D3	Q5	*D4	R36	E3	R152	*A4	R297	C5	R475	*C2	R566	*A2	RB217	*B5
C37	*E3	C253	*C4	C471	B2	CL208	*B3	IC8	*D3	Q6	*D4	R37	E3	R153	*A4	R298	*B5	R476	*C2	R901	*D1	RB224	*B5
C38	E3	C254	*C4	C472	B2	CL401	C5	IC9	D2	Q7	E4	R38	D3	R154	C3	R299	*B5	R477	*C2	R902	D1	RB225	*B5
C39	E3	C255	*C4	C473	B1	CL402	C5	IC10	*D2	Q8	*D2	R39	D3	R155	D4	R300	B5	R478	*C2	R903	D1	RB401	D5
C40	*E3	C256	*C4	C474	B2	CL404	*C2	IC101	*D5	Q9	D4	R40	D3	R156	D5	R301	*B5	R479	*C2	R905	*D1	RB402	*C5
C41	E3	C257	*C4	C475	*A2	CL901	*B3	IC102	*D5	Q101	*D5	R41	D3	R157	D5	R302	B5	R480	*C2	R906	D1	RB403	*C5
C42	*E3	C258	*C4	C476	*B1	CL902	*B4	IC103	*D5	Q102	*D5	R42	D3	R158	D5	R303	*B5	R481	*C2	R907	D1	RB404	C5
C43	E3	C259	*D4	C477	*C1	CL903	*B4	IC104	*E5	Q103	*E5	R43	D3	R159	D5	R304	*B5	R482	*C2	R908	*D1	RB405	C5
C44	E3	C260	*D4	C478	*B1	CL904	*C4	IC105	*E5	Q104	*E5	R44	D3	R161	D4	R305	*A3	R483	*C2	R909	*D1	RB406	*C5
C45	D3	C261	*C4	C479	*A2	CL905	*C4	IC106	C3	Q105	*E5	R45	D3	R201	*C1	R306	*A3	R484	*C2	R910	*D1	RB407	*C5
C46	D3	C262	*C4	C480	C1	CL906	*B4	IC107	*A4	Q106	*E5	R46	D3	R202	C1	R307	C3	R485	*C2	R911	D1	RB408	*C3
C47	D3	C263	*C4	C481	C1	CL907	*B4	IC201	C1	Q201	*C1	R47	D3	R203	C1	R308	C3	R486	*B2	R912	*A3	RB409	*C3
C48	*D3	C264	*C4	C482	*A5	CL908	*B4	IC202	B3	Q202	*C1	R48	*D3	R205	*C1	R309	C3	R487	*B2	R913	*A3	RB410	*C3
C49	*E3	C265	*C4	C483	A5			IC203	*A3	Q203	*C1	R49	*D3	R206	C1	R310	C3	R488	*B2	R914	D1	RB411	*D3
C50	D3	C266	*C4	C484	*A5	CN101	C5	IC204	*B3	Q204	*C1	R50	*D3	R207	C1	R311	C3	R489	*B2	R915	D1	RB412	*D3
C51	D3	C267	*C4	C485	D2	CN102	E5	IC205	C3	Q205	*A2	R51	D2	R208	*C1	R312	C3	R490	*B2	R916	D1	RB413	*D3
C52	*E3	C268	*C4	C486	D2	CN103	E5	IC207	*C5	Q206	*A3	R52	D2	R209	*C1	R313	C3	R491	*B2	R917	D1	RB414	D5
C53	D3	C269	*C4	C487	E2	CN104	E2	IC208	C4	Q207	*A2	R53	D2	R210	*C1	R314	C3	R492	*B2	R918	B4	RB415	E5
C54	*E3	C270	*C4	C488	E2	CN105	E1	IC209	C5	Q208	C1	R54	D2	R211	C1	R401	C5	R493	*B2	R919	*A4	RB416	D5
C55	*D3	C271	*B5	C489	E2	CN201	C1	IC210	B5	Q209	C1	R55	C2	R212	*A2	R402	C5	R494	*B2	R920	*A4	RB417	D5
C56	D3	C274	B5	C490	E2	CN401	C1	IC211	*B5	Q210	B3	R56	D2	R213	*A2	R403	D5	R495	*B2	R922	B4	RB418	*D1
C57	D4	C276	*B5	C491	E2	CN402	A5	IC212	*B5	Q211	B3	R57	D2	R214	C1	R404	D5	R496	*B2	R923	B4	RB424	*D1
C101	*D5	C277	*B5	C492	E2	CN901	D1	IC213	C5	Q212	B3	R58	*D2	R215	C1	R405	D5	R497	*B2	R924	B4	RB425	*C3
C102	*D5	C278	C5	C493	E2			IC401	*C5	Q213	B3	R59	*D2	R216	C1	R406	*C5	R498	*B2	R925	*A4	RB426	*C3
C103	*D5	C279	B5	C494	E2	CP201	B3	IC402	*C5	Q214	B3	R60	*D2	R217	C1	R407	C5	R499	*B2	R927	*A4	RB427	*C3
C104	E5	C402	C5	C495	E2	CP401	B2	IC403	C5	Q401	*A2	R61	*C2	R218	*A3	R408	C5	R500	*B2	R928	B4	RB428	*C2
C105	E5	C403	C5	C496	E2	CP901	B4	IC404	C5	Q402	*A2	R62	*C2	R219	*A3	R409	*C5	R501	*A2	R929	*A4	RB429	*C2
C106	*E5	C404	C5	C497	E2			IC405	D5	Q403	*C1	R63	*C2	R221	B3	R410	C5	R502	*B2	R930	B4	RB901	*C4
C107	*E5	C405	*C5	C901	D1	D1	*D4	IC407	D5	Q404	*C2	R64	*C2	R222	B3	R411	C5	R503	*B2	R931	B4	RB902	*C4
C108	*E5	C406	C5	C902	D1	D2	*E4	IC408	D5	Q405	*C2	R65	*D2	R223	B3	R412	C5	R504	*A2	R932	B4	RB903	*C4
C109	*E5	C407	C5	C903	D1	D5	D4	IC409	C3	Q406	B2	R66	*D2	R224	*A3	R413	C5	R505	*A2	R933	*B4	RB904	*C4
C110	*E5	C408	*B5	C904	*D1	D101	*E5	IC410	*B2	Q407	*A2	R67	*D2	R225	*A3	R414	C5	R506	*A2	R934	*A4	RB905	B5
C111	*E5	C409	C5	C905	D1	D102	*E5	IC411	*A2	Q408	*A2	R68	*D2	R227	B3	R415	C5	R507	*A2	R935	B4	RB906	B5
C112	*E5	C410	C5	C906	D1	D103	*E5	IC412	B2	Q409	*A2	R69	D4	R228	*A3	R416	C3	R508	*A2	R936	*B4	RB907	*B5
C113	*E5	C412	B5	C907	D1			IC413	*A2	Q410	E2	R70	*D3	R229	B3	R417	C3	R509	*A2	R937	*B4	RB908	*B5
C114	*E5	C413	*A5	C908	D1	E1	C3	IC414	*A2	Q411	E2	R71	E4	R230	B3	R418	*D3	R510	*A2	R938	*B4	RB909	*A5
C115	C3	C415	D5	C909	*A3	E2	*E2	IC415	*A5	Q412	E2	R72	E4	R231	B3	R421	E2	R511	B2	R939	B3	RB910	*A5
C116	*A4	C416	D5	C910	*A4			IC416	A5	Q902	*C1	R73	E4	R232	*B3	R422	E2	R512	*A2	R940	*B4	RB911	*C4
C117	E1	C417	D5	C911	*A3	FB1	*E3	IC418	E2	Q903	*C1	R74	E4	R233	*A3	R423	*D2	R513	B2	R941	*B4	RB912	*C4
C118	E1	C418	D5	C912	*A4	FB2	*E3	IC419	E2	Q904	*D1	R101	*D5	R234	B3	R424	*D2	R514	*A2	R942	B3		
C119	E1	C420	*D3	C913	*A4	FB3	*E3	IC420	E2	Q905	*A3	R102	*D5	R235	*B3	R425	D5	R515	B2	R943	B4	S401	E1
C120	E1	C421	*D2	C914	*A4	FB4	*E3	IC421	C5	Q906	*A4	R103	*D5	R236	*B3	R426	D5	R516	B2	R944	*A4	S402	D2
C121	E1	C422	*D3	C915	*A4	FB5	*E3	IC422	C5	Q907	*A3	R104	*D5	R237	*B3	R427	D5	R517	*A2	R945	B3		
C122	*A4	C423	*D3	C916	*A4	FB6	*E3	IC423	C5	Q908	D1	R105	*D5	R238	B2	R428	*D3	R518	*A2	R946	B3	TP201	C3
C123	E1	C424	*C3	C917	*A4	FB101	E1	IC901	D1	Q909	D1	R106	*D5	R239	*B3	R429	*D3	R519	B1	R947	*B4	TP401	C5
C201	C1	C425	*C3	C918	*B4	FB201	*C1	IC902	B4	Q910	B4	R107	*D5	R240	*B3	R430	*C2	R520	B1	R948	*B4	TP901	C4
C202	C1	C426	*C2	C919	*B4	FB202	*A3	IC903	*A4	Q911	B4	R108	*D4	R241	B2	R431	*D2	R521	*A2	R949	*B3		
C203	C1	C427	*C2	C920	B3	FB203	*A3	IC904	*B4	Q912	B4	R109	*D5	R242	B2	R432	*D2	R522	*A2	R950	*C3	X201	B2
C204	*C1	C428	*D2	C921	B3	FB204	*A2	IC905	B4	Q913	B4	R110	*D5	R243	B2	R433	*C3	R523	*A2	R951	*B3	X401	C2
C205	C1	C429	*D3	C922	*B4	FB205	B3	IC906	*B5	Q914	B4	R111	*D5	R244	*B3	R434	*C3	R524	C1	R952	*B3	X402	E2
C206	C1	C430	*C3	C923	*B4	FB206	*B2	IC907	B5	Q915	B4	R112	*D5	R245	*B3	R435	*D3	R525	C1	R953	B4	X403	E2
C207	C1	C431	*D2	C924	B3	FB207	*B2	IC908	*A5	Q916	B4	R113	*D5	R246	*B2	R436	*D2	R526	C1	R954	*B4	X901	B3
C208	C1	C432	*D3	C925	*B4	FB208	*C3	IC909	*C1	Q917	B4	R114	*D5	R247	*B2	R437	*D2	R527	C1	R955	*B4		
C209	*A3	C433	*D3	C926	B4	FB209	C3	IC910	*A3	Q918	*A4	R115	*D5	R248	*B2	R438	*D2	R528	C1	R956	*B4		
C210	*A2	C434	*C2	C927	*B4	FB210	C3	IC911	C4	Q919	*C3	R116	*D5	R249	*B3	R439	*D2	R529	C1	R957	*B4		

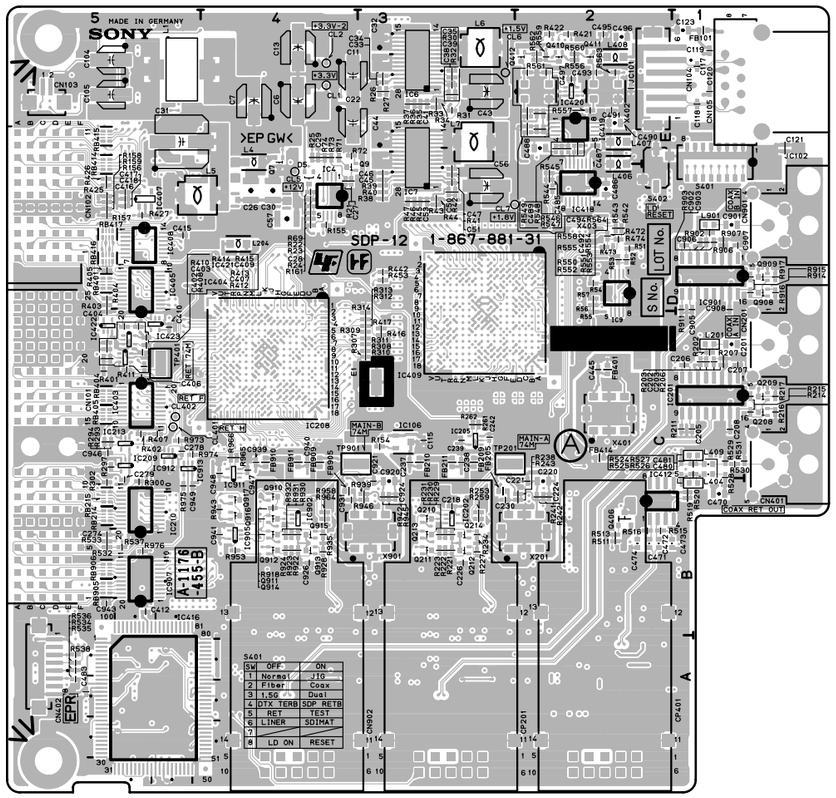

SDP-12 -A SIDE-
SUFFIX: -13, 31

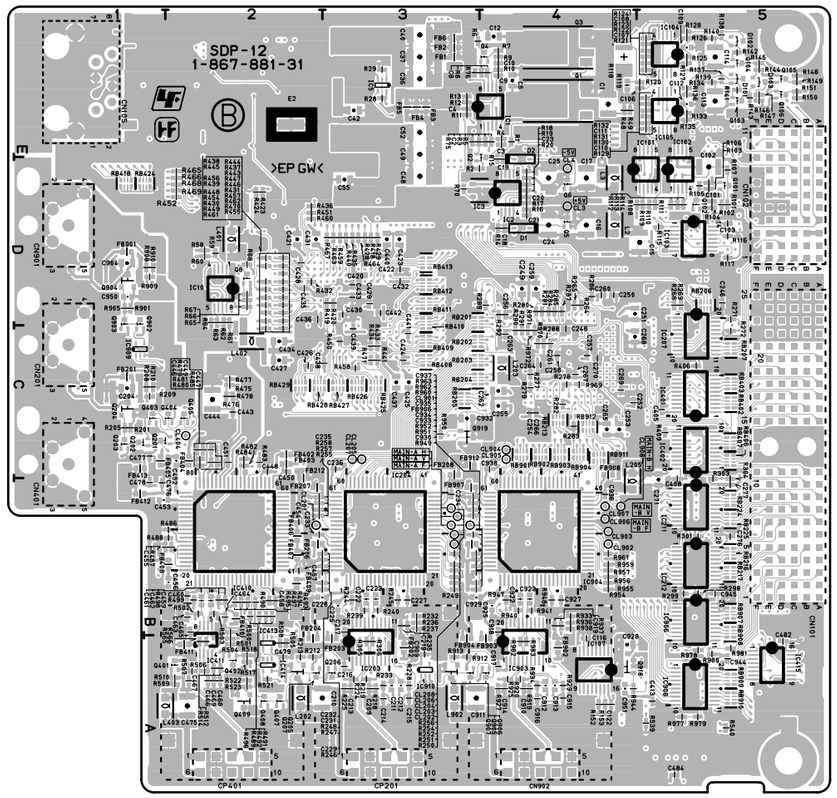

SDP-12 -B SIDE-
SUFFIX: -13, 31

SDP-12 (1-867-881-13, 31)
---

*:B SIDE

C1	*E4	C213	*A3	C437	*C3	C930	*B3	FB211	C3	IC913	C5	R3	*E4	R118	*E4	R251	*B3	R438	*D2	R528	C1	R956	*B4
C2	*E3	C214	*A3	C438	*C3	C931	B4	FB212	*C2			R4	*E4	R119	*E4	R252	*B3	R439	*D2	R529	C1	R957	*B4
C3	*E4	C215	*A3	C439	*C3	C932	*C3	FB401	C2	JC101	E2	R5	*E4	R120	*E5	R253	B3	R440	*D3	R530	C1	R958	B4
C4	*E3	C216	*A3	C440	*D3	C933	*B3	FB402	*C2	JC102	E1	R6	*E3	R121	*E5	R254	*B3	R441	*C3	R531	C1	R959	*B4
C5	*E4	C217	*B3	C441	*C3	C934	*B3	FB403	*C2			R7	*E4	R122	*E5	R255	*B2	R442	D3	R532	B5	R960	*B3
C6	E4	C218	B3	C442	*C3	C935	*B3	FB404	*C2	L1	E5	R8	*E4	R123	*E5	R256	*B3	R443	*D2	R533	B5	R961	*B4
C7	E4	C219	*B3	C443	*C2	C936	*B4	FB405	*C1	L2	*D4	R9	*E4	R124	*E5	R257	*B2	R444	*D2	R534	A5	R962	*B3
C8	*E4	C220	B2	C444	*C2	C937	*B3	FB406	*B2	L3	*D4	R10	*E4	R125	*E5	R258	*B2	R445	*D2	R535	A5	R963	*B3
C9	*E4	C221	B2	C445	C2	C938	*C4	FB407	*B2	L4	E4	R11	*E3	R126	*E5	R259	B3	R446	*D2	R536	A5	R964	B4
C10	*E4	C222	*B3	C446	*C2	C939	C4	FB408	*B2	L5	D5	R12	*E3	R127	*E5	R261	C3	R447	*D2	R537	B5	R965	C4
C11	E4	C223	*B3	C447	*C2	C940	C4	FB409	*B2	L6	E3	R13	*E3	R128	*E5	R262	C3	R448	*D2	R538	A5	R966	C4
C12	*E4	C224	B2	C448	*C2	C941	B4	FB410	*B2	L7	E3	R14	*D4	R129	*E5	R264	*D4	R449	*C2	R539	*A5	R969	*C4
C13	E4	C225	*B3	C449	*C2	C943	B5	FB411	*A2	L201	C1	R15	*E4	R130	*E5	R265	*D4	R450	*C3	R540	*A5	R970	*C4
C15	*D5	C226	B3	C450	*C2	C944	*A5	FB412	*B1	L202	*A2	R16	*D4	R131	*E5	R268	*D5	R451	*D2	R542	D2	R971	*C4
C16	*D4	C227	*B3	C451	*C2	C945	*B5	FB413	*C1	L203	*C4	R17	*D4	R132	*E5	R269	*D5	R452	*D2	R543	D2	R972	*C4
C17	*D4	C228	*B2	C452	*C2	C946	C5	FB414	C2	L204	D4	R18	*D4	R133	*E5	R271	*C5	R453	D3	R544	D2	R973	C5
C18	*D4	C229	*B2	C453	*B1	C947	C4	FB901	*D1	L205	*B4	R19	*D4	R134	*E5	R272	*C5	R454	*D2	R545	D2	R974	C5
C19	*E4	C230	B3	C454	*B2	C948	C4	FB902	*A4	L401	*D2	R20	*D4	R135	*E5	R277	*C4	R455	*C2	R546	E2	R975	B5
C20	*D4	C231	*B2	C455	*B1	C949	B5	FB903	*A4	L402	*C2	R21	D4	R136	*E5	R278	*C4	R456	*D2	R547	E2	R976	B5
C21	*D4	C232	*B2	C456	*B2	C950	*D1	FB904	*A3	L403	*A1	R22	D4	R137	*E5	R279	*C4	R457	*D2	R548	E2	R977	*A5
C22	E4	C233	*B2	C457	*B2	C951	*A4	FB905	B4	L404	B1	R23	D4	R138	*E5	R280	*C4	R458	*C3	R549	E2	R978	*A5
C23	*D4	C234	*B3	C458	*B2			FB906	*B3	L406	E2	R24	D4	R139	*E5	R281	*C4	R459	*D3	R550	E2	R979	*A5
C24	*D4	C235	*B2	C459	*B2	CL1	E4	FB907	*B3	L407	E2	R25	E4	R140	*E5	R282	*C4	R460	*D2	R551	E2	R980	*A5
C25	*D4	C236	*C3	C460	*B2	CL2	E4	FB908	*C4	L408	E2	R26	E3	R141	*E5	R283	*C4	R461	*C2	R552	E2	R981	*A5
C26	D4	C237	C3	C461	*B2	CL3	*D4	FB909	C4	L409	C1	R27	E3	R142	*E5	R284	*C4	R462	*C2	R553	E2	R982	*A4
C27	D4	C238	C3	C462	*B2	CL4	*D4	FB910	C4	L901	D1	R28	*E3	R143	*E5	R285	*C4	R463	*D3	R554	E2	R983	*A4
C28	D4	C239	C3	C463	*B2	CL5	D4	FB911	C4	L902	*A3	R29	*E3	R144	*E5	R286	*D4	R464	*D3	R555	E2		
C29	E4	C242	C3	C464	*B2	CL6	E3	FB912	*C3			R30	E3	R145	*E5	R287	*C4	R465	*D2	R556	E2	RB201	*C3
C30	D4	C246	*D5	C465	*B2	CL7	D2			Q1	*E4	R31	E3	R146	*E5	R288	*C4	R466	*D2	R557	E2	RB202	*C3
C31	E5	C248	*C4	C466	*A2	CL201	*B2	IC1	*E4	Q2	*E4	R32	E3	R147	*E5	R289	*D4	R467	*D3	R558	E2	RB203	*C3
C32	E3	C249	*D4	C467	*A2	CL202	*B3	IC2	*D4	Q3	*E4	R33	E3	R148	*E5	R290	*C4	R468	*D2	R559	E2	RB204	*C3
C33	E3	C250	*D4	C468	*A2	CL203	*B3	IC3	*D3	Q4	*E4	R34	E3	R149	*E5	R291	*C4	R469	*D2	R560	E2	RB205	*C3
C34	E3	C251	*C4	C469	*A2	CL204	*B3	IC4	D4	Q5	*D4	R35	E3	R150	*E5	R292	*C4	R470	*C2	R561	E2	RB206	*D5
C35	E3	C252	*C4	C470	B1	CL205	*C3	IC5	*E3	Q6	*D4	R36	E3	R151	*E5	R293	C5	R471	*C3	R562	E2	RB207	*C5
C36	*E3	C253	*C4	C471	B2	CL206	*B3	IC6	E3	Q7	E4	R37	E3	R152	*A4	R294	C5	R472	D2	R563	E2	RB213	*C4
C37	*E3	C254	*C4	C472	B2	CL207	*C3	IC7	E3	Q8	*D2	R38	D3	R153	*A4	R297	C5	R473	D2	R564	E2	RB214	B5
C38	E3	C255	*C4	C473	B1	CL208	*B3	IC9	D2	Q9	D4	R39	D3	R154	C3	R298	*B5	R474	D2	R565	*A2	RB215	B5
C39	E3	C256	*C4	C474	B2	CL401	C5	IC10	*D2	Q101	*D5	R40	D3	R155	D4	R299	*B5	R475	*C2	R566	*A2	RB216	*B5
C40	*E3	C257	*C4	C475	*A2	CL402	C5	IC101	*D5	Q102	*D5	R41	D3	R156	D5	R300	B5	R476	*C2	R901	*D1	RB217	*B5
C41	E3	C258	*C4	C476	*B1	CL404	*C2	IC102	*D5	Q103	*E5	R42	D3	R157	D5	R301	*B5	R477	*C2	R902	D1	RB224	*B5
C42	*E3	C259	*D4	C477	*C1	CL901	*B3	IC103	*D5	Q104	*E5	R43	D3	R158	D5	R302	B5	R478	*C2	R903	D1	RB225	*B5
C43	E3	C260	*D4	C478	*B1	CL902	*B4	IC104	*E5	Q105	*E5	R44	D3	R159	D5	R303	*B5	R479	*C2	R905	*D1	RB401	D5
C44	E3	C261	*C4	C479	*A2	CL903	*B4	IC105	*E5	Q106	*E5	R45	D3	R161	D4	R304	*B5	R480	*C2	R906	D1	RB402	*C5
C45	D3	C262	*C4	C480	C1	CL904	*C4	IC106	C3	Q201	*C1	R46	D3	R201	*C1	R305	*A3	R481	*C2	R907	D1	RB403	*C5
C46	D3	C263	*C4	C481	C1	CL905	*C4	IC107	*A4	Q202	*C1	R47	D3	R202	C1	R306	*A3	R482	*C2	R908	*D1	RB404	C5
C47	D3	C264	*C4	C482	*A5	CL906	*B4	IC201	C1	Q203	*C1	R48	*E4	R203	C1	R307	C3	R483	*C2	R909	*D1	RB405	C5
C48	*D3	C265	*C4	C483	A5	CL907	*B4	IC202	B3	Q204	*C1	R49	*E4	R205	*C1	R308	C3	R484	*C2	R910	*D1	RB406	*C5
C49	*E3	C266	*C4	C484	*A5	CL908	*B4	IC203	*A3	Q205	*A2	R51	D2	R206	C1	R309	C3	R485	*C2	R911	D1	RB407	*C5
C50	D3	C267	*C4	C485	D2			IC204	*B3	Q206	*A3	R52	D2	R207	C1	R310	C3	R486	*B2	R912	*A3	RB408	*C3
C51	D3	C268	*C4	C486	D2	CN101	C5	IC205	C3	Q207	*A2	R53	D2	R208	*C1	R311	C3	R487	*B2	R913	*A3	RB409	*C3
C52	*E3	C269	*C4	C487	E2	CN102	E5	IC207	*C5	Q208	C1	R54	D2	R209	*C1	R312	C3	R488	*B2	R914	D1	RB410	*C3
C53	D3	C270	*C4	C488	E2	CN103	E5	IC208	C4	Q209	C1	R55	C2	R210	*C1	R313	C3	R489	*B2	R915	D1	RB411	*D3
C55	*D3	C271	*B5	C489	E2	CN104	E2	IC209	C5	Q210	B3	R56	D2	R211	C1	R314	C3	R490	*B2	R916	D1	RB412	*D3
C56	D3	C274	B5	C490	E2	CN105	E1	IC210	B5	Q211	B3	R57	D2	R212	*A2	R401	C5	R491	*B2	R917	D1	RB413	*D3
C57	D4	C276	*B5	C491	E2	CN201	C1	IC211	*B5	Q212	B3	R58	*D2	R213	*A2	R402	C5	R492	*B2	R918	B4	RB414	D5
C101	*D5	C277	*B5	C492	E2	CN401	C1	IC212	*B5	Q213	B3	R59	*D2	R214	C1	R403	D5	R493	*B2	R919	*A4	RB415	E5
C102	*D5	C278	C5	C493	E2	CN402	A5	IC213	C5	Q214	B3	R60	*D2	R215	C1	R404	D5	R494	*B2	R920	*A4	RB416	D5
C103	*D5	C279	B5	C494	E2	CN901	D1	IC401	*C5	Q401	*A2	R61	*C2	R216	C1	R405	D5	R495	*B2	R922	B4	RB417	D5
C104	E5	C402	C5	C495	E2	CN902	B4	IC402	*C5	Q402	*A2	R62	*C2	R217	C1	R406	*C5	R496	*B2	R923	B4	RB418	*D1
C105	E5	C403	C5	C496	E2			IC403	C5	Q403	*C1	R63	*C2	R218	*A3	R407	C5	R497	*B2	R924	B4	RB424	*D1
C106	*E5	C404	C5	C497	E2	CP201	B3	IC404	C5	Q404	*C2	R64	*C2	R219	*A3	R408	C5	R498	*B2	R925	*A4	RB425	*C3
C107	*E5	C405	*C5	C901	D1	CP401	B2	IC405	D5	Q405	*C2	R65	*D2	R221	B3	R409	*C5	R499	*B2	R927	*A4	RB426	*C3
C108	*E5	C406	C5	C902	D1			IC407	D5	Q406	B2	R66	*D2	R222	B3	R410	C5	R500	*B2	R928	B4	RB427	*C3
C109	*E5	C407	C5	C903	D1	D1	*D4	IC408	D5	Q407	*A2	R67	*D2	R223	B3	R411	C5	R501	*A2	R929	*A4	RB428	*C2
C110	*E5	C408	*B5	C904	*D1	D2	*E4	IC409	C3	Q408	*A2	R68	*D2	R224	*A3	R412	C5	R502	*B2	R930	B4	RB429	*C2
C111	*E5	C409	C5	C905	D1	D5	D4	IC410	*B2	Q409	*A2	R69	D4	R225	*A3	R413	C5	R503	*B2	R931	B4	RB901	*C4
C112	*E5	C410	C5	C906	D1	D101	*E5	IC411	*A2	Q410	E2	R70	*D3	R227	B3	R414	C5	R504	*A2	R932	B4	RB902	*C4
C113	*E5	C412	B5	C907	D1	D102	*E5	IC412	B2	Q411	E2	R71	E4	R228	*A3	R415	C5	R505	*A2	R933	*B4	RB903	*C4
C114	*E5	C413	*A5	C908	D1	D103	*E5	IC413	*A2	Q412	E2	R72	E4	R229	B3	R416	C3	R506	*A2	R934	*A4	RB904	*C4
C115	C3	C415	D5	C909	*A3			IC414	*A2	Q902	*C1	R73	E4	R230	B3	R417	C3	R507	*A2	R935	B4	RB905	B5
C116	*A4	C416	D5	C910	*A4	E1	C3	IC415	*A5	Q903	*C1	R74	E4	R231	B3	R418	*D3	R508	*A2	R936	*B4	RB906	B5
C117	E1	C417	D5	C911	*A3	E2	*E2	IC416	A5	Q904	*D1	R75	*E3	R232	*B3	R419	*D3	R509	*A2	R937	*B4	RB907	*B5
C118	E1	C418	D5	C912	*A4			IC418	E2	Q905	*A3	R76	*E3	R233	*A3	R420	*D3	R510	*A2	R938	*B4	RB908	*B5
C119	E1	C420	*D3	C913	*A4	FB1	*E3	IC419	E2	Q906	*A4	R101	*D5	R234	B3	R421	E2	R511	B2	R939	B3	RB909	*A5
C120	E1	C421	*D2	C914	*A4	FB2	*E3	IC420	E2	Q907	*A3	R102	*D5	R235	*B3	R422	E2	R512	*A2	R940	*B4	RB910	*A5
C121	E1	C422	*D3	C915	*A4	FB3	*E3	IC421	C5	Q908	D1	R103	*D5	R236	*B3	R423	*D2	R513	B2	R941	*B4	RB911	*C4
C122	*A4	C423	*D3	C916	*A4	FB4	*E3	IC422	C5	Q909	D1	R104	*D5	R237	*B3	R424	*D2	R514	*A2	R942	B3	RB912	*C4
C123	E1	C424	*C3	C917	*A4	FB5	*E3	IC423	C5	Q910	B4	R105	*D5	R238	B2	R425	D5	R515	B2	R943	B4		
C201	C1	C425	*C3	C918	*B4	FB6	*E3	IC901	D1	Q911	B4	R106	*D5	R239	*B3	R426	D5	R516	B2	R944	*A4	S401	E1
C202	C1	C426	*C2	C919	*B4	FB101	E1	IC902	B4	Q912	B4	R107	*D5	R240	*B3	R427	D5	R517	*A2	R945	B3	S402	D2
C203	C1	C427	*C2	C920	B3	FB201	*C1	IC903	*A4	Q913	B4	R108	*D4	R241	B2	R428	*D3	R518	*A2	R946	B3		
C204	*C1	C428	*D2	C921	B3	FB202	*A3	IC904	*B4	Q914	B4	R109	*D5	R242	B2	R429	*D3	R519	B1	R947	*B4	TP201	C3
C205	C1	C429	*D3	C922	*B4	FB203	*A3	IC905	B4	Q915	B4	R110	*D5	R243	B2	R430	*C2	R520	B1	R948	*B4	TP401	C5
C206	C1	C430	*C3	C923	*B4	FB204	*A2	IC906	*B5	Q916	B4	R111	*D5	R244	*B3	R431	*D2	R521	*A2	R949	*B3	TP901	C4
C207	C1	C431	*D2	C924	B3	FB205	B3	IC907	B5	Q917	B4	R112	*D5	R245	*B3	R432	*D2	R522	*A2	R950	*C3		
C208	C1	C432	*D3	C925	*B4	FB206	*B2	IC908	*A5	Q918	*A4	R113	*D5	R246	*B2	R433	*C3	R523	*A2	R951	*B3	X201	B2
C209	*A3	C433	*D3	C926	B4	FB207	*B2	IC909	*C1	Q919	*C3	R114	*D5	R247	*B2	R434	*C3	R524	C1	R952	*B3	X401	C2
C210	*A2	C434	*C2	C927	*B4	FB208	*C3	IC910	*A3			R115	*D5	R248	*B2	R435	*D3	R525	C1	R953	B4	X402	E2
C211	*A3	C435	*D2	C928	*A4	FB209	C3	IC911	C4	R1	*E4	R116	*D5	R249	*B3	R436	*D2	R526	C1	R954	*B4	X403	E2
C212	*A3	C436	*C2	C929	*B3	FB210	C3	IC912	C5	R2	*D3	R117	*D5	R250	*B3	R437	*D2	R527	C1	R955	*B4	X901	B3

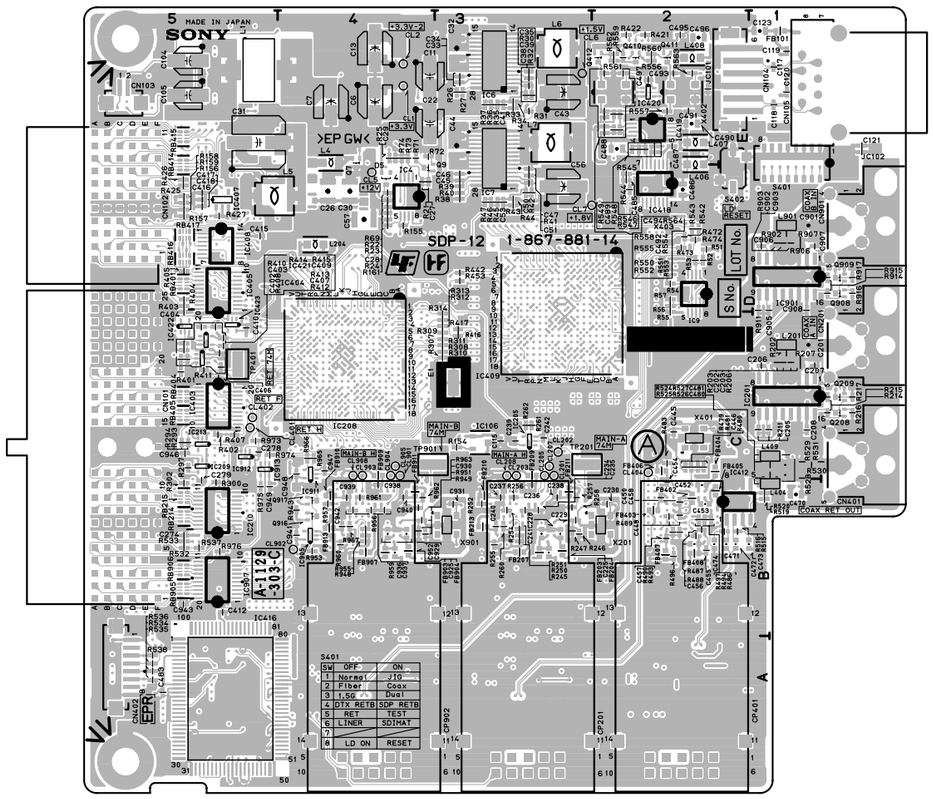

SDP-12 -A SIDE-
SUFFIX: -14

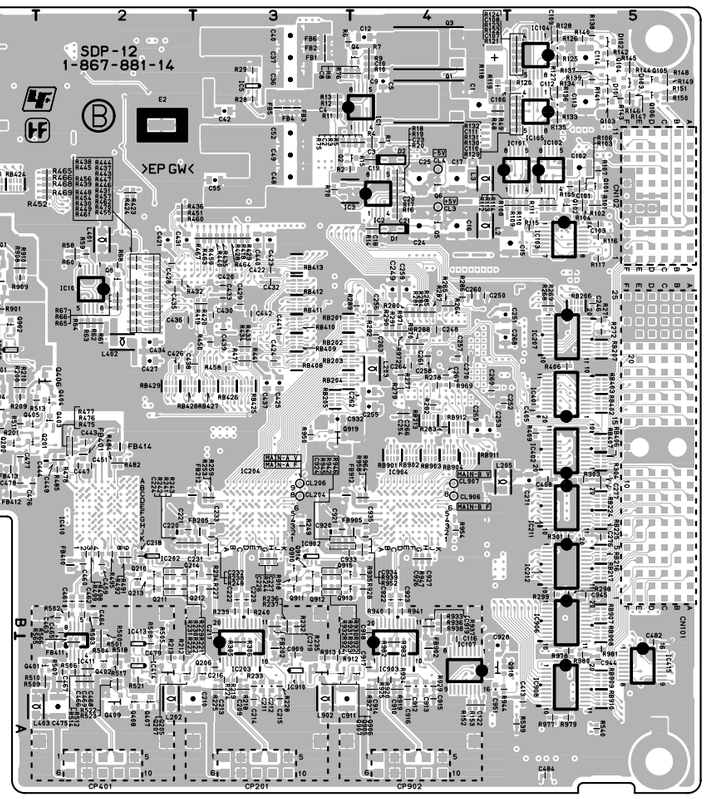

SDP-12 -B SIDE-
SUFFIX: -14

SDP-12 (1-867-881-14)
---

*:B SIDE

C1	*E4	C214	*A3	C437	*C3	C931	B3	FB213	B3	L1	E5	R9	*E4	R125	*E5	R259	*B3	R446	*D2	R537	B5	R966	C4
C2	*E3	C215	*A3	C438	*C3	C932	*C3	FB401	*C2	L2	*D4	R10	*E4	R126	*E5	R260	B3	R447	*D2	R538	A5	R967	B4
C3	*E4	C216	*A3	C439	*C3	C933	*B3	FB402	B2	L3	*D4	R11	*E3	R127	*E5	R261	C3	R448	*D2	R539	*A5	R969	*C4
C4	*E3	C217	*B3	C440	*D3	C934	*B4	FB403	B2	L4	E4	R12	*E3	R128	*E5	R262	C3	R449	*C2	R540	*A5	R970	*C4
C5	*E4	C218	*B2	C441	*C3	C935	*B4	FB404	C2	L5	D5	R13	*E3	R129	*E5	R264	*D4	R450	*C3	R542	D2	R971	*C4
C6	E4	C219	*B3	C442	*C3	C936	B4	FB405	B2	L6	E3	R14	*D4	R130	*E5	R265	*D4	R451	*D2	R543	D2	R972	*C4
C7	E4	C220	*B2	C443	*C2	C937	B4	FB406	C2	L7	E3	R15	*E4	R131	*E5	R268	*D5	R452	*D2	R544	D2	R973	C5
C8	*E4	C221	*B2	C444	*C2	C938	B4	FB407	B2	L201	C1	R16	*D4	R132	*E5	R269	*D5	R453	D3	R545	D2	R974	C5
C9	*E4	C222	*B3	C445	C2	C939	B4	FB408	B2	L202	*A2	R17	*D4	R133	*E5	R271	*C5	R454	*D2	R546	E2	R975	B5
C10	*E4	C223	*B3	C446	C2	C940	B4	FB410	*B2	L203	*C4	R18	*D4	R134	*E5	R272	*C5	R455	*C2	R547	E2	R976	B5
C11	E4	C224	*B2	C447	*C2	C941	B4	FB411	*A2	L204	D4	R19	*D4	R135	*E5	R277	*C4	R456	*D2	R548	E2	R977	*A5
C12	*E4	C225	B3	C448	B2	C942	B4	FB412	*B1	L205	*B4	R20	*D4	R136	*E5	R278	*C4	R457	*D2	R549	E2	R978	*A5
C13	E4	C226	*B3	C449	*C2	C943	B5	FB413	*C1	L401	*D2	R21	D4	R137	*E5	R279	*C4	R458	*C3	R550	E2	R979	*A5
C15	*D5	C227	*B3	C450	B2	C944	*A5	FB414	*C2	L402	*C2	R22	D4	R138	*E5	R280	*C4	R459	*D3	R551	E2	R980	*A5
C16	*D4	C228	B3	C451	*C2	C945	*B5	FB901	*D1	L403	*A1	R23	D4	R139	*E5	R281	*C4	R460	*D2	R552	E2	R981	*A5
C17	*D4	C229	B3	C452	B2	C946	C5	FB902	*A4	L404	B1	R24	D4	R140	*E5	R282	*C4	R461	*C2	R553	E2	R982	*A4
C18	*D4	C230	B2	C453	B2	C947	C4	FB903	B4	L406	E2	R25	E4	R141	*E5	R283	*C4	R462	*C2	R554	E2	R983	*A4
C19	*E4	C231	*B3	C454	B2	C948	C4	FB904	B4	L407	E2	R26	E3	R142	*E5	R284	*C4	R463	*D3	R555	E2		
C20	*D4	C232	*B3	C455	B2	C949	B5	FB905	*B4	L408	E2	R27	E3	R143	*E5	R285	*C4	R464	*D3	R556	E2	RB201	*C3
C21	*D4	C233	*B3	C456	B2	C950	*D1	FB907	B4	L409	C1	R28	*E3	R144	*E5	R286	*D4	R465	*D2	R557	E2	RB202	*C3
C22	E4	C234	B3	C457	B2	C951	*A4	FB909	C4	L901	D1	R29	*E3	R145	*E5	R287	*C4	R466	*D2	R558	E2	RB203	*C3
C23	*D4	C235	B3	C458	B2	C952	B4	FB910	B4	L902	*A3	R30	E3	R146	*E5	R288	*C4	R467	*D3	R559	E2	RB204	*C3
C24	*D4	C236	B3	C459	*B2			FB911	B4			R31	E3	R147	*E5	R289	*D4	R468	*D2	R560	E2	RB205	*C3
C25	*D4	C237	B3	C460	*B2	CL1	E4	FB912	*B3	Q1	*E4	R32	E3	R148	*E5	R290	*C4	R469	*D2	R561	E2	RB206	*D5
C26	D4	C238	B3	C461	*B2	CL2	E4	FB913	B4	Q2	*E4	R33	E3	R149	*E5	R291	*C4	R470	*C2	R562	E2	RB207	*C5
C27	D4	C239	C3	C462	*B2	CL3	*D4			Q3	*E4	R34	E3	R150	*E5	R292	*C4	R471	*C3	R563	E2	RB213	*C4
C28	D4	C240	B3	C463	*B2	CL4	*D4	IC1	*E4	Q4	*E4	R35	E3	R151	*E5	R293	C5	R472	D2	R564	E2	RB214	B5
C29	E4	C241	B3	C464	*B2	CL5	D4	IC2	*D4	Q5	*D4	R36	E3	R152	*A4	R294	C5	R473	D2	R565	*A2	RB215	B5
C30	D4	C242	C3	C465	*B2	CL6	E3	IC3	*D3	Q6	*D4	R37	E3	R153	*A4	R297	C5	R474	D2	R566	*A2	RB216	*B5
C31	E5	C246	*D5	C466	*A2	CL7	D2	IC4	D4	Q7	E4	R38	D3	R154	C3	R298	*B5	R475	*C2	R901	*D1	RB217	*B5
C32	E3	C248	*C4	C467	*A2	CL201	C3	IC5	*E3	Q8	*D2	R39	D3	R155	D4	R299	*B5	R476	*C2	R902	D1	RB224	*B5
C33	E3	C249	*D4	C468	*A2	CL202	C3	IC6	E3	Q9	D4	R40	D3	R156	D5	R300	B5	R477	*C2	R903	D1	RB225	*B5
C34	E3	C250	*D4	C469	*A2	CL203	C3	IC7	E3	Q101	*D5	R41	D3	R157	D5	R301	*B5	R478	*C2	R905	*D1	RB401	D5
C35	E3	C251	*C4	C470	B1	CL204	*B3	IC9	D2	Q102	*D5	R42	D3	R158	D5	R302	B5	R479	C2	R906	D1	RB402	*C5
C36	*E3	C252	*C4	C471	B2	CL205	C3	IC10	*D2	Q103	*E5	R43	D3	R159	D5	R303	*B5	R480	C2	R907	D1	RB403	*C5
C37	*E3	C253	*C4	C472	B2	CL206	*B3	IC101	*D5	Q104	*E5	R44	D3	R161	D4	R304	*B5	R481	C2	R908	*D1	RB404	C5
C38	E3	C254	*C4	C473	B1	CL207	C3	IC102	*D5	Q105	*E5	R45	D3	R201	*C1	R305	*A3	R482	*C2	R909	*D1	RB405	C5
C39	E3	C255	*C4	C474	B2	CL208	C3	IC103	*D5	Q106	*E5	R46	D3	R202	C1	R306	*A3	R483	C2	R910	*D1	RB406	*C5
C40	*E3	C256	*C4	C475	*A2	CL401	C5	IC104	*E5	Q201	*C1	R47	D3	R203	C1	R307	C3	R484	*C2	R911	D1	RB407	*C5
C41	E3	C257	*C4	C476	*B1	CL402	C5	IC105	*E5	Q202	*C1	R48	*E4	R205	*C1	R308	C3	R485	*C2	R912	*A3	RB408	*C3
C42	*E3	C258	*C4	C477	*C1	CL404	C2	IC106	C3	Q203	*C1	R49	*E4	R206	C1	R309	C3	R486	B2	R913	*A3	RB409	*C3
C43	E3	C259	*D4	C478	*B1	CL901	C4	IC107	*A4	Q204	*C1	R51	D2	R207	C1	R310	C3	R487	B2	R914	D1	RB410	*C3
C44	E3	C260	*D4	C479	*A2	CL902	B4	IC201	C1	Q205	*A2	R52	D2	R208	*C1	R311	C3	R488	B2	R915	D1	RB411	*D3
C45	D3	C261	*C4	C480	C1	CL903	C4	IC202	*B2	Q206	*A3	R53	D2	R209	*C1	R312	C3	R489	B2	R916	D1	RB412	*D3
C46	D3	C262	*C4	C481	C1	CL904	C4	IC203	*A3	Q207	*A2	R54	D2	R210	*C1	R313	C3	R490	B2	R917	D1	RB413	*D3
C47	D3	C263	*C4	C482	*A5	CL905	C4	IC204	*B3	Q208	C1	R55	C2	R211	C1	R314	C3	R491	*B2	R918	*B3	RB414	D5
C48	*D3	C264	*C4	C483	A5	CL906	*B4	IC205	C3	Q209	C1	R56	D2	R212	*A2	R401	C5	R492	*B2	R919	*A4	RB415	E5
C49	*E3	C265	*C4	C484	*A5	CL907	*B4	IC207	*C5	Q210	*B2	R57	D2	R213	*A2	R402	C5	R493	B2	R920	*A4	RB416	D5
C50	D3	C266	*C4	C485	D2	CL908	C4	IC208	C4	Q211	*B2	R58	*D2	R214	C1	R403	D5	R494	B2	R922	*B3	RB417	D5
C51	D3	C267	*C4	C486	D2			IC209	C5	Q212	*B3	R59	*D2	R215	C1	R404	D5	R495	*B2	R923	*B3	RB418	*D1
C52	*E3	C268	*C4	C487	E2	CN101	C5	IC210	B5	Q213	*B2	R60	*D2	R216	C1	R405	D5	R496	B2	R924	*B3	RB424	*D1
C53	D3	C269	*C4	C488	E2	CN102	E5	IC211	*B5	Q214	*B3	R61	*C2	R217	C1	R406	*C5	R497	B2	R925	*A4	RB425	*C3
C55	*D3	C270	*C4	C489	E2	CN103	E5	IC212	*B5	Q401	*A2	R62	*C2	R218	*A3	R407	C5	R498	*B2	R927	*A4	RB426	*C3
C56	D3	C271	*B5	C490	E2	CN104	E2	IC213	C5	Q402	*A2	R63	*C2	R219	*A3	R408	C5	R499	*B2	R928	*B4	RB427	*C3
C57	D4	C274	B5	C491	E2	CN105	E1	IC401	*C5	Q403	*C2	R64	*C2	R221	*B2	R409	*C5	R500	*B2	R929	*A4	RB428	*C2
C101	*D5	C276	*B5	C492	E2	CN201	C1	IC402	*C5	Q404	*C2	R65	*D2	R222	*B2	R410	C5	R501	*A2	R930	*B3	RB429	*C2
C102	*D5	C277	*B5	C493	E2	CN401	C1	IC403	C5	Q405	*C1	R66	*D2	R223	*B2	R411	C5	R502	*B2	R931	*B3	RB901	*C4
C103	*D5	C278	C5	C494	E2	CN402	A5	IC404	C5	Q406	*C2	R67	*D2	R224	*A3	R412	C5	R503	*B2	R932	*B3	RB902	*C4
C104	E5	C279	B5	C495	E2	CN901	D1	IC405	D5	Q407	*A2	R68	*D2	R225	*A3	R413	C5	R504	*A2	R933	*B4	RB903	*C4
C105	E5	C402	C5	C496	E2			IC407	D5	Q408	*A2	R69	D4	R227	*B3	R414	C5	R505	*A2	R934	*A4	RB904	*C4
C106	*E5	C403	C5	C497	E2	CP201	B3	IC408	D5	Q409	*A2	R70	*D3	R228	*A3	R415	C5	R506	*A2	R935	*B4	RB905	B5
C107	*E5	C404	C5	C901	D1	CP401	B2	IC409	C3	Q410	E2	R71	E4	R229	*B2	R416	C3	R507	*A2	R936	*B4	RB906	B5
C108	*E5	C405	*C5	C902	D1	CP902	B4	IC410	*B2	Q411	E2	R72	E4	R230	*B2	R417	C3	R508	*A2	R937	*B4	RB907	*B5
C109	*E5	C406	C5	C903	D1			IC411	*A2	Q412	E2	R73	E4	R231	*B2	R418	*D3	R509	*A2	R938	*B4	RB908	*B5
C110	*E5	C407	C5	C904	*D1	D1	*D4	IC412	B2	Q902	*C1	R74	E4	R232	*B3	R419	*D3	R510	*A2	R939	*B4	RB909	*A5
C111	*E5	C408	*B5	C905	D1	D2	*E4	IC413	*A2	Q903	*C1	R75	*E3	R233	*A3	R420	*D3	R511	*C1	R940	*B4	RB910	*A5
C112	*E5	C409	C5	C906	D1	D5	D4	IC414	*A2	Q904	*D1	R76	*E3	R234	*B3	R421	E2	R512	*A2	R941	*B4	RB911	*C4
C113	*E5	C410	C5	C907	D1	D101	*E5	IC415	*A5	Q905	*A3	R101	*D5	R235	*B3	R422	E2	R513	*C2	R942	*B3	RB912	*C4
C114	*E5	C412	B5	C908	D1	D102	*E5	IC416	A5	Q906	*A4	R102	*D5	R236	*B3	R423	*D2	R514	*A2	R943	B4		
C115	C3	C413	*A5	C909	*A3	D103	*E5	IC418	E2	Q907	*A3	R103	*D5	R237	*B3	R424	*D2	R515	B2	R944	*A4	S401	E1
C116	*A4	C415	D5	C910	*A4			IC419	E2	Q908	D1	R104	*D5	R238	*B3	R425	D5	R516	B2	R945	*B3	S402	D2
C117	E1	C416	D5	C911	*A3	E1	C3	IC420	E2	Q909	D1	R105	*D5	R239	*B3	R426	D5	R517	*A2	R946	*B4		
C118	E1	C417	D5	C912	*A4	E2	*E2	IC421	C5	Q910	*B3	R106	*D5	R240	*B3	R427	D5	R518	*A2	R947	*B4	TP201	C3
C119	E1	C418	D5	C913	*A4			IC422	C5	Q911	*B3	R107	*D5	R241	*B2	R428	*D3	R519	B1	R948	B4	TP401	C5
C120	E1	C420	*D3	C914	*A4	FB1	*E3	IC423	C5	Q912	*B3	R108	*D4	R242	*B2	R429	*D3	R520	B1	R949	B4	TP901	C4
C121	E1	C421	*D2	C915	*A4	FB2	*E3	IC901	D1	Q913	*B4	R109	*D5	R243	*B3	R430	*C2	R521	*A2	R950	*C3		
C122	*A4	C422	*D3	C916	*A4	FB3	*E3	IC902	*B3	Q914	*B3	R110	*D5	R244	*B3	R431	*D2	R522	*A2	R951	B4	X201	B2
C123	E1	C423	*D3	C917	*A4	FB4	*E3	IC903	*A4	Q915	*B4	R111	*D5	R245	B3	R432	*D2	R523	*A2	R952	*B4	X401	C2
C201	C1	C424	*C3	C918	*B4	FB5	*E3	IC904	*B4	Q916	B4	R112	*D5	R246	B3	R433	*C3	R524	C1	R953	B4	X402	E2
C202	C1	C425	*C3	C919	*B4	FB6	*E3	IC905	B4	Q917	B4	R113	*D5	R247	B3	R434	*C3	R525	C1	R954	*B4	X403	E2
C203	C1	C426	*C2	C920	*B3	FB101	E1	IC906	*B5	Q918	*A4	R114	*D5	R248	*B3	R435	*D3	R526	C1	R955	B4	X901	B3
C204	*C1	C427	*C2	C921	*B3	FB201	*C1	IC907	B5	Q919	*C3	R115	*D5	R249	*B3	R436	*D2	R527	C1	R956	B4		
C205	C1	C428	*D2	C922	*B4	FB202	*A3	IC908	*A5			R116	*D5	R250	B3	R437	*D2	R528	C1	R957	B4		
C206	C1	C429	*D3	C923	*B4	FB203	B3	IC909	*C1	R1	*E4	R117	*D5	R251	B3	R438	*D2	R529	C1	R958	*B4		
C207	C1	C430	*C3	C924	*B3	FB204	B3	IC910	*A3	R2	*D3	R118	*E4	R252	B3	R439	*D2	R530	C1	R959	B4		
C208	C1	C431	*D2	C925	B4	FB205	*B3	IC911	C4	R3	*E4	R119	*E4	R253	*B3	R440	*D3	R531	C1	R960	B4		
C209	*A3	C432	*D3	C926	*B4	FB207	B3	IC912	C5	R4	*E4	R120	*E5	R254	B3	R441	*C3	R532	B5	R961	B4		
C210	*A2	C433	*D3	C927	*B4	FB209	C3	IC913	C5	R5	*E4	R121	*E5	R255	B3	R442	D3	R533	B5	R962	B4		
C211	*A3	C434	*C2	C928	*A4	FB210	B3			R6	*E3	R122	*E5	R256	B3	R443	*D2	R534	A5	R963	B4		
C212	*A3	C435	*D2	C929	B4	FB211	B3	JC101	E2	R7	*E4	R123	*E5	R257	B3	R444	*D2	R535	A5	R964	*B4		
C213	*A3	C436	*C2	C930	B4	FB212	*B2	JC102	E1	R8	*E4	R124	*E5	R258	B3	R445	*D2	R536	A5	R965	C4		

VDA-64A, VDA-64B, VDA-64C

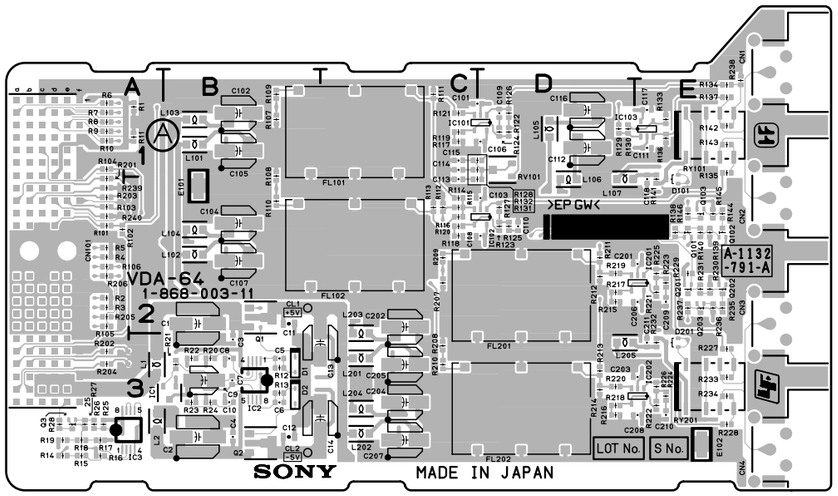

VDA-64A
VDA-64B
VDA-64C -A SIDE-
SUFFIX: -11, 12

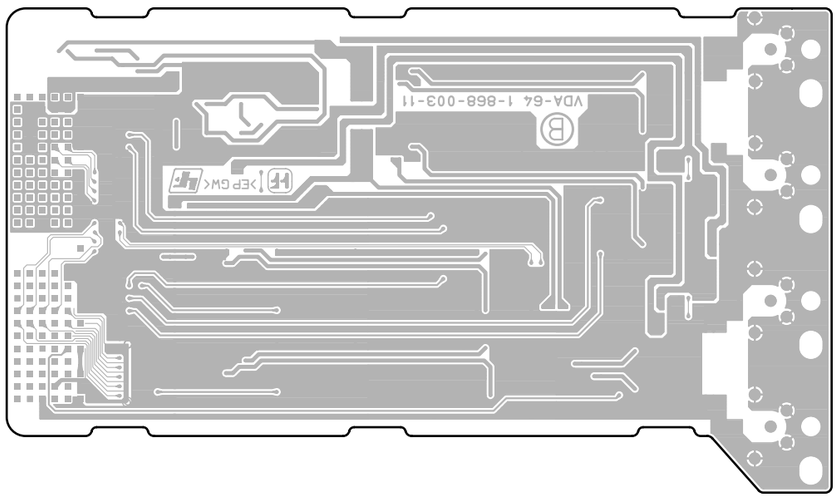

VDA-64A
VDA-64B
VDA-64C -B SIDE-
SUFFIX: -11, 12

VDA-64A
VDA-64B
VDA-64C (1-868-003-11, 12)

C1	B2	L107	D2	R139	E2
C2	B3	L201	C3	R140	E2
C3	B3	L202	C3	R141	E2
C4	B3	L203	C3	R142	E1
C5	B3	L204	C3	R143	E1
C6	B3	L205	D3	R144	E2
C7	B3			R145	E2
C8	B3	Q1	B2	R146	E2
C9	B3	Q2	B3	R201	A2
C10	B3	Q3	A3	R202	A3
C11	B2	Q101	E2	R203	A2
C12	B3	Q102	E2	R204	A3
C13	B3	Q103	E2	R205	A2
C14	B3	Q201	E2	R206	A2
C101	C1	Q202	E2	R207	C2
C102	B1	Q203	E2	R208	C3
C103	D2			R209	C2
C104	B2	R1	A1	R210	C3
C105	B1	R2	A2	R211	D2
C106	D1	R3	A2	R212	D2
C107	B2	R4	A2	R213	D3
C108	D2	R5	A2	R214	D3
C109	D1	R6	A1	R215	D2
C110	D2	R7	A1	R216	D3
C111	E1	R8	A1	R217	D2
C112	D1	R9	A1	R218	D3
C113	C2	R10	A1	R219	D2
C114	C1	R11	A1	R220	D3
C115	C1	R12	B3	R221	E2
C116	D1	R13	B3	R222	E3
C117	E1	R14	A3	R223	E2
C118	E2	R15	A3	R224	E3
C201	E2	R16	A3	R225	E2
C202	C2	R17	A3	R226	E3
C203	E3	R18	A3	R227	E3
C204	C3	R19	A3	R228	E3
C205	C3	R20	B3	R229	E2
C206	E2	R21	B3	R230	E2
C207	C3	R22	B3	R231	E2
C208	E3	R23	B3	R232	E3
C209	E2	R24	B3	R233	E3
C210	E3	R25	A3	R234	E3
C211	E3	R26	A3	R235	E2
		R27	A3	R236	E2
CL1	B2	R28	A3	R237	E2
CL2	B3	R101	A2	R238	E1
		R102	A2	R239	A2
CN1	E1	R103	A2	R240	A2
CN2	E2	R104	A1		
CN3	E2	R105	A2	RV101	D1
CN4	E3	R106	A2		
CN101	A2	R107	B1	RY101	E1
		R108	B1	RY201	E3
D1	B3	R109	B1		
D2	B3	R110	B2		
D101	E2	R111	C1		
D201	E3	R112	C2		
		R113	C2		
E101	B2	R114	C2		
E102	E3	R115	C2		
		R116	C2		
FL101	C1	R117	C1		
FL102	C2	R118	C2		
FL201	D2	R119	C1		
FL202	D3	R120	C2		
		R121	C1		
IC1	B3	R122	D1		
IC2	B3	R123	D2		
IC3	A3	R124	D1		
IC101	D1	R125	D2		
IC102	D2	R126	D1		
IC103	E1	R127	D2		
IC201	E2	R128	C1		
IC202	E3	R129	D1		
		R130	D1		
L1	A3	R131	C2		
L2	A3	R132	C1		
L101	B1	R133	E1		
L102	B2	R134	E1		
L103	B1	R135	E1		
L104	B2	R136	E1		
L105	D1	R137	E1		
L106	D2	R138	E2		

8-26

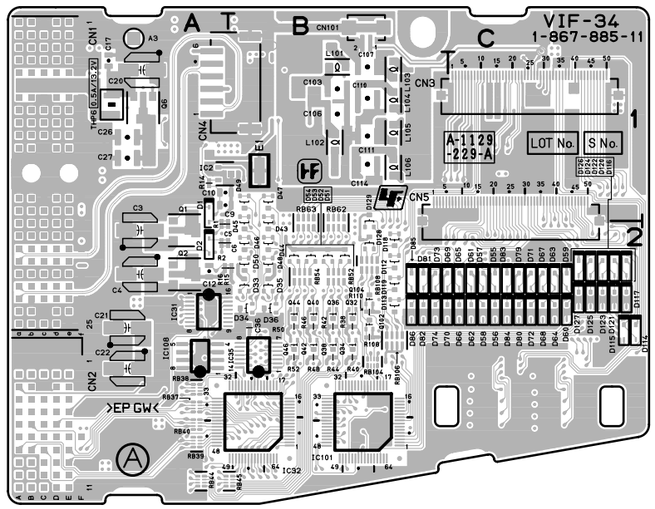

VIF-34
VIF-34B -A SIDE-
SUFFIX: -11, 31

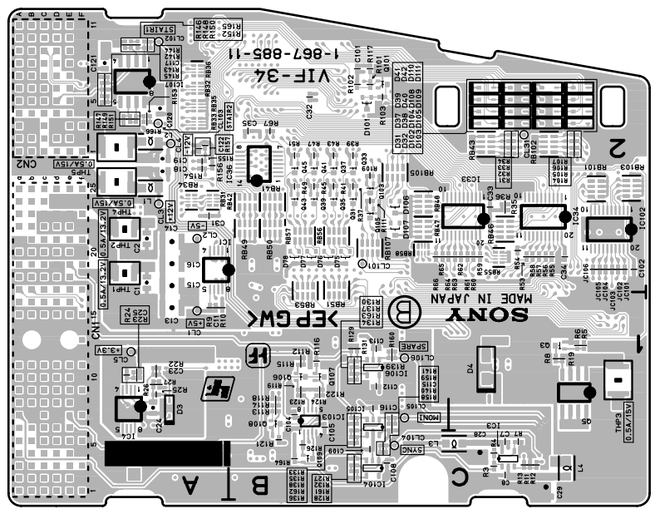

VIF-34
VIF-34B -B SIDE-
SUFFIX: -11, 31

VIF-34
VIF-34B (1-867-885-11, 31)
---

*:B SIDE

C1	* A2	D35	B2	IC1	* A2	R19	* C1	R143	* A2		
C2	* A2	D36	B2	IC2	A1	R22	* A1	R144	* A2		
C3	A2	D37	* C2	IC3	* C1	R23	* A1	R145	* A2		
C4	A2	D38	* C2	IC4	* A1	R24	* A1	R146	* A2		
C5	A2	D39	* C2	IC31	A2	R25	* A1	R147	* A2		
C6	A2	D40	* C2	IC32	B2	R26	* A1	R148	* A2		
C7	* C1	D41	* C2	IC33	* C2	R27	* A1	R149	* A2		
C8	* C1	D42	* C2	IC34	* C2	R31	* C2	R150	* A2		
C9	A1	D43	B2	IC35	B2	R32	* C2	R151	* A2		
C10	A1	D44	B2	IC36	* B2	R33	* C2	R152	* A2		
C11	* A1	D45	B2	IC101	B2	R34	* C2	R153	* A2		
C12	A2	D46	B2	IC102	* C2	R35	* C2	R154	* A2		
C13	* A1	D47	B1	IC103	* B1	R36	* C2	R155	* A2		
C14	* A2	D48	B2	IC104	* B1	R37	* B2	R156	* A2		
C15	* A2	D49	B1	IC105	* B1	R38	B2	R157	* A2		
C16	* A2	D50	B2	IC106	* B1	R39	* B2	R158	* B1		
C17	A1	D51	B2	IC107	* A2	R40	B2	R159	* B1		
C18	* A2	D52	B2	IC108	A2	R41	* B2	R160	* B1		
C19	* A2	D53	B2			R42	B2	R161	* B1		
C20	A1	D54	B2	JC101	* C2	R43	* B2	R162	* B1		
C21	A2	D55	C2	JC102	* C2	R44	B2	R163	* B1		
C22	A2	D56	C2	JC103	* C2	R45	* B2	R164	* B1		
C23	* A1	D57	C2	JC104	* C2	R46	B2	R165	* A2		
C24	* A1	D58	C2	JC105	* C2	R47	* B2	R166	* A2		
C25	* A1	D59	C2	JC106	* C2	R48	B2				
C26	A1	D60	C2			R49	* B2	RB31	* A2		
C27	A1	D61	C2	L1	* A2	R50	B2	RB32	* A2		
C28	* C1	D62	C2	L2	* A2	R51	* B2	RB33	* A2		
C29	* C1	D63	C2	L3	* C1	R52	B2	RB34	* A2		
C31	* A2	D64	C2	L4	* C1	R53	* C2	RB35	* A2		
C32	* B2	D65	C2	L101	B1	R54	* C2	RB36	* A2		
C33	* C2	D66	C2	L102	B1	R55	* C2	RB37	A2		
C34	* C2	D67	C2	L103	B1	R56	* C2	RB38	A2		
C35	* B2	D68	C2	L104	B1	R57	* C2	RB39	A2		
C36	B2	D69	B2	L105	B1	R58	* C2	RB40	A2		
C101	* B2	D70	B2	L106	B1	R59	* C2	RB41	* B2		
C102	* C2	D71	C2			R60	* C2	RB42	* B2		
C103	B1	D72	C2	Q1	A2	R61	* C2	RB43	* C2		
C104	* B1	D73	B2	Q2	A2	R62	* C2	RB44	A2		
C105	* B1	D74	B2	Q3	* C1	R63	* C2	RB45	B2		
C106	B1	D75	* B2	Q5	* C1	R64	* B2	RB46	* C2		
C107	B1	D76	* B2	Q6	A1	R65	* B2	RB47	* B2		
C108	* B1	D77	* B2	Q31	* B2	R66	* B2	RB48	* B2		
C109	* B1	D78	* B2	Q32	B2	R67	* B2	RB49	* B2		
C110	B1	D79	C2	Q33	* B2	R101	* B2	RB50	* B2		
C111	B1	D80	C2	Q34	B2	R102	* B2	RB51	* B2		
C112	* B1	D81	B2	Q35	* B2	R103	* B2	RB52	B2		
C113	* B1	D82	B2	Q36	B2	R104	* C2	RB53	* B2		
C114	B1	D83	C2	Q37	* B2	R105	* C2	RB54	B2		
C115	* B1	D84	C2	Q38	B2	R106	* C2	RB55	* C2		
C116	* B1	D85	B2	Q39	* B2	R107	* C2	RB56	* B2		
C117	* A2	D86	B2	Q40	B2	R108	B2	RB57	* B2		
C120	* A2	D101	* B2	Q41	* B2	R109	* B2	RB58	* B2		
C121	* A2	D102	* C2	Q42	B2	R110	B2	RB62	B2		
C122	* A2	D103	* C2	Q43	* B2	R111	* B2	RB63	B2		
		D104	* C2	Q44	B2	R112	* B1	RB101	* C2		
CL1	* A1	D105	* C2	Q45	* B2	R113	* B1	RB102	* C2		
CL2	* A2	D106	* B2	Q46	B2	R114	* B1	RB103	* C2		
CL3	* A2	D107	* B2	Q101	* B2	R115	* B1	RB104	B2		
CL4	* A2	D108	* C2	Q102	B2	R116	* B1	RB105	* B2		
CL5	* A1	D109	* C2	Q103	* B2	R117	* B2	RB106	B2		
CL31	* C2	D110	* C2	Q104	B2	R118	* B1	RB107	* B2		
CL101	* B2	D111	* C2	Q105	* B2	R119	* B1	RB108	B2		
CL102	* A2	D112	B2	Q106	* B1	R121	* B1				
CL103	* A2	D113	B2	Q107	* B1	R122	* B1	THP1	* A2		
CL104	* B1	D114	C2	Q108	* B1	R123	* B1	THP2	* A2		
CL105	* B1	D115	C2	Q109	* B1	R124	* B1	THP3	* C1		
CL106	* B1	D116	C2			R126	* B1	THP4	* A2		
		D117	C2	R1	A2	R127	* B1	THP5	* A2		
CN1	A1	D118	B2	R2	A2	R128	* B1	THP6	A1		
CN2	A2	D119	B2	R3	* C1	R129	* B1				
CN3	C1	D120	C2	R4	* C1	R130	* B1				
CN4	B1	D121	C2	R5	* C1	R131	* B1				
CN5	C1	D122	C2	R6	* C1	R132	* B1				
CN101	B1	D123	C2	R7	* C1	R133	* B1				
		D124	C2	R8	* C1	R134	* B1				
D1	A1	D125	C2	R9	* A1	R135	* B1				
D2	A2	D126	C2	R10	* A1	R136	* B1				
D3	* A1	D127	C2	R11	* C1	R137	* B1				
D4	* C1	D128	B2	R12	* C1	R138	* B1				
D31	* C2	D129	B2	R13	* C1	R139	* B1				
D32	* C2			R14	A1	R140	* B1				
D33	B2	E1	B1	R15	B2	R141	* B1				
D34	B2			R16	A2	R142	* A2				

ADO-10, DU-390

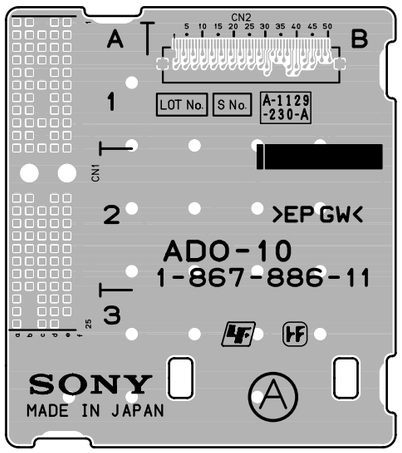

ADO-10 -A SIDE-
SUFFIX: -11, 31

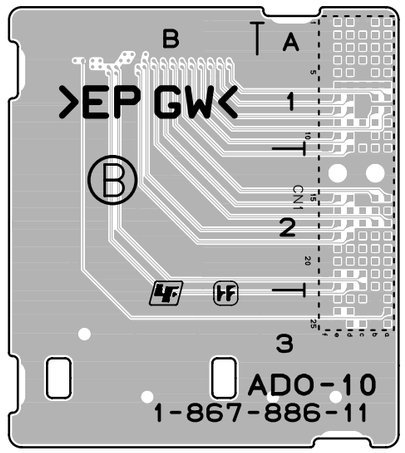

ADO-10 -B SIDE-
SUFFIX: -11, 31

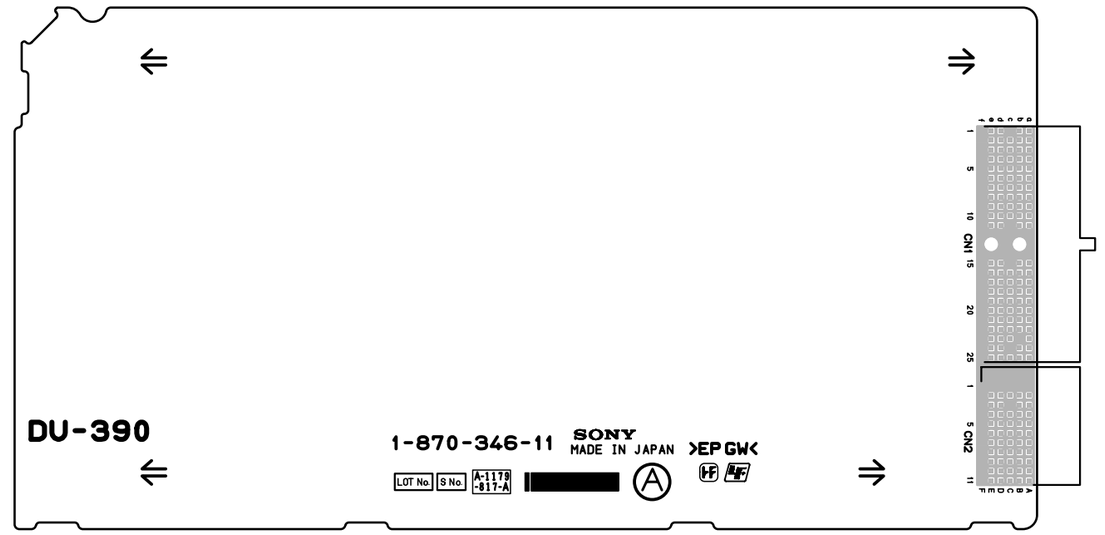

DU-390 -A SIDE-
SUFFIX: -11

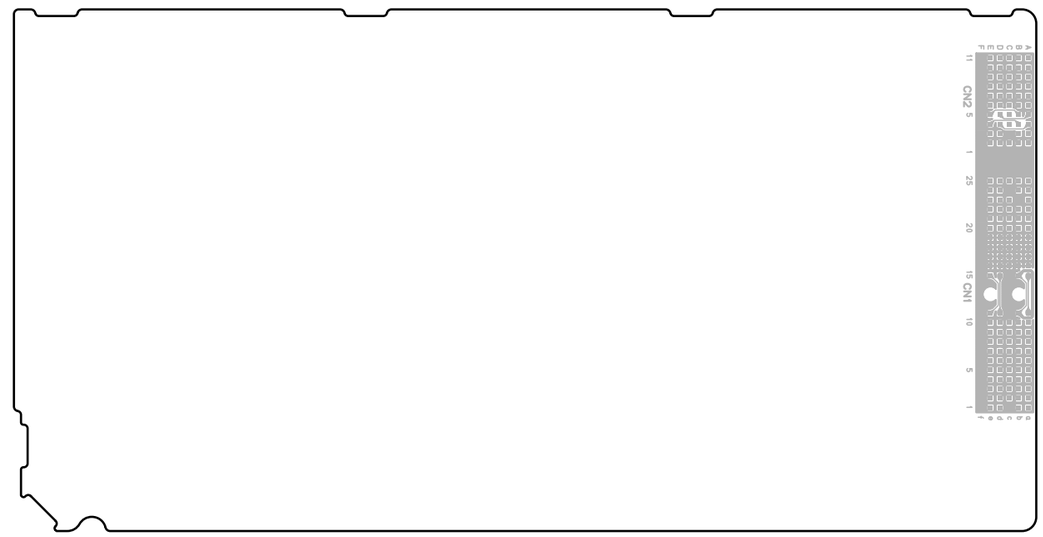

DU-390 -B SIDE-
SUFFIX: -11

8-28

CN-3275, DU-565

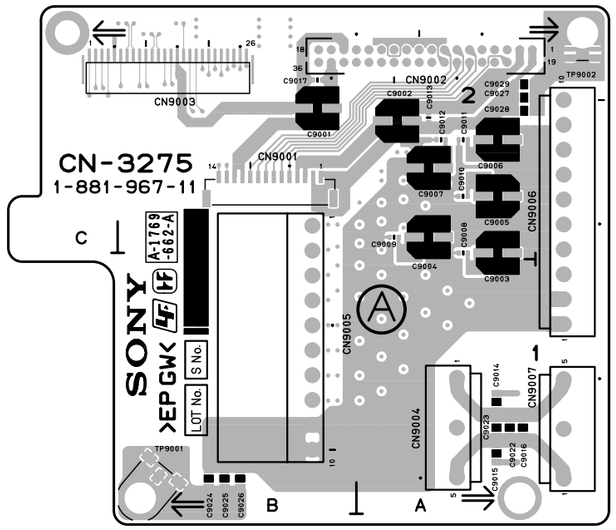

CN-3275 -A SIDE-
SUFFIX: -11

CN-3275 (1-881-967-11)

C9001	B2
C9002	A2
C9003	A2
C9004	A2
C9005	A2
C9006	A2
C9007	A2
C9008	A2
C9009	A2
C9010	A2
C9011	A2
C9012	A2
C9013	A2
C9014	A1
C9015	A1
C9016	A1
C9017	B2
C9022	A1
C9023	A1
C9024	B1
C9025	B1
C9026	B1
C9027	A2
C9028	A2
C9029	A2
CN9001	B2
CN9002	A2
CN9003	B2
CN9004	A1
CN9005	B1
CN9006	A2
CN9007	A1
TP9001	B1
TP9002	A2



DU-565 -A SIDE-
SUFFIX: -11

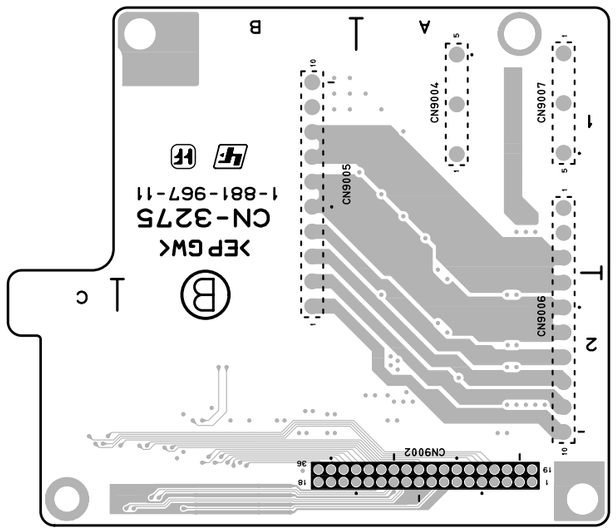

CN-3275 -B SIDE-
SUFFIX: -11

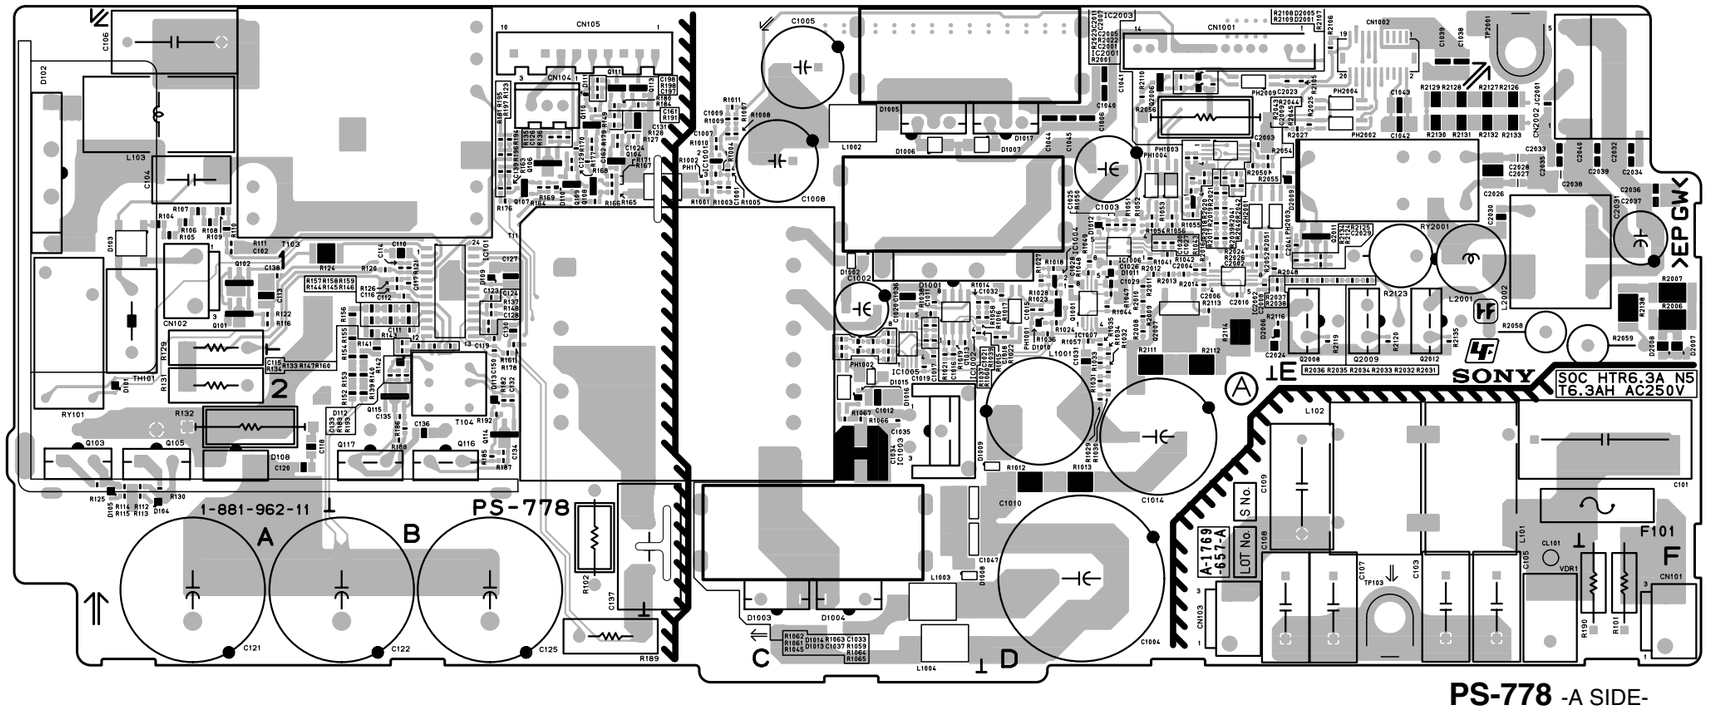

PS-778 -A SIDE-
SUFFIX: -11

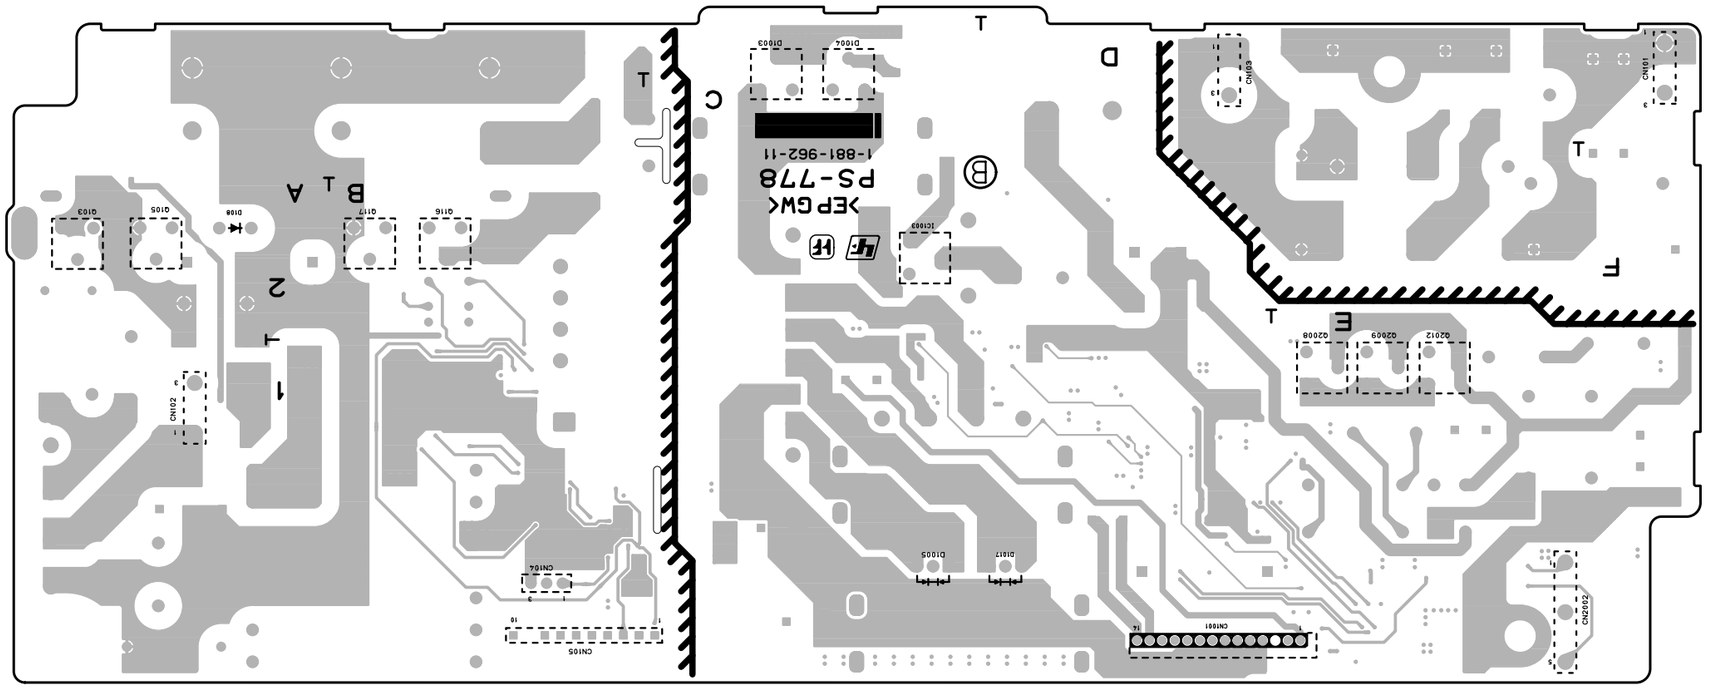

PS-778 -B SIDE-
SUFFIX: -11

PS-778 (1-881-962-11)

C101	F2	C2005	D1	L1002	C1	R159	B1	R1064	C2
C102	A1	C2006	D1	L1003	C2	R160	B1	R1065	C2
C103	E2	C2007	D1	L1004	C2	R161	B2	R1066	C2
C104	A1	C2008	D1	L2001	E1	R163	B1	R1067	C2
C105	E2	C2009	D1	L2002	E1	R164	B1	R2001	D1
C106	A1	C2010	D1			R165	B1	R2006	F1
C107	E2	C2011	D1	PH11	C1	R166	B1	R2007	F1
C108	E2	C2023	E1	PH1001	D1	R167	B1	R2008	D1
C109	E2	C2024	E1	PH1002	C2	R168	B1	R2009	D1
C110	B1	C2026	E1	PH1003	D1	R169	B1	R2010	D1
C111	B1	C2027	E1	PH1004	D1	R170	B1	R2011	D1
C112	B1	C2028	E1	PH2001	D1	R171	B1	R2012	D1
C113	A1	C2029	E1	PH2002	E1	R176	B1	R2013	D1
C114	B1	C2030	E1	PH2003	E1	R177	B1	R2014	D1
C115	B1	C2031	F1	PH2004	E1	R178	B1	R2016	D1
C116	B1	C2032	F1	PH2009	D1	R179	B1	R2017	D1
C117	B1	C2033	E1			R180	B1	R2018	D1
C118	A2	C2034	F1	Q101	A1	R181	B1	R2019	D1
C119	B1	C2035	E1	Q102	A1	R182	B2	R2020	D1
C120	A2	C2036	F1	Q103	A2	R183	B2	R2021	D1
C121	A2	C2037	F1	Q104	B1	R184	B1	R2022	D1
C122	B2	C2038	E1	Q105	A2	R185	B2	R2023	D1
C123	B1	C2039	F1	Q106	B1	R186	B2	R2024	D1
C124	B1	C2040	F1	Q107	B1	R187	B2	R2025	E1
C125	B2	C2041	E1	Q108	B1	R188	B2	R2026	D1
C126	B1			Q109	B1	R189	B2	R2027	E1
C127	B1	CL101	E2	Q110	B1	R190	F2	R2031	E1
C128	B1			Q111	B1	R191	B1	R2032	E1
C129	B1	CN101	F2	Q113	B1	R192	B2	R2033	E1
C130	B1	CN102	A1	Q114	B2	R193	B2	R2034	E1
C131	B1	CN103	D2	Q115	B2	R194	B1	R2035	E1
C132	B2	CN104	B1	Q116	B2	R195	B1	R2036	E1
C133	B2	CN105	C1	Q117	B2	R196	B1	R2037	E1
C134	B2	CN1001	D1	Q1001	D1	R197	B1	R2038	E1
C135	B2	CN1002	E1	Q2006	D1	R198	B1	R2039	D1
C136	B2	CN2002	E1	Q2007	D1	R1001	C1	R2040	D1
C137	C2			Q2008	E1	R1002	C1	R2041	D1
C138	A1	D101	A2	Q2009	E1	R1003	C1	R2042	D1
C139	B1	D102	A1	Q2011	E1	R1004	C1	R2043	D1
C150	B2	D103	A1	Q2012	E1	R1005	C1	R2044	D1
C161	B1	D104	A2			R1007	C1	R2045	D1
C162	B1	D105	A2	R101	F2	R1008	C1	R2048	E1
C197	B1	D108	A2	R102	B2	R1009	C1	R2050	D1
C198	B1	D109	B1	R104	A1	R1010	C1	R2051	E1
C1001	C1	D110	B1	R105	A1	R1011	C1	R2052	E1
C1002	C1	D111	B1	R106	A1	R1012	D2	R2054	D1
C1003	D1	D112	B2	R107	A1	R1013	D2	R2055	D1
C1004	D2	D113	B2	R108	A1	R1014	C1	R2056	D1
C1005	C1	D1001	C1	R109	A1	R1015	C1	R2058	E1
C1006	D1	D1002	C1	R110	A1	R1016	C1	R2059	F1
C1007	C1	D1003	C2	R111	A1	R1017	D1	R2105	E1
C1008	C1	D1004	C2	R112	A2	R1018	D1	R2106	E1
C1009	C1	D1005	C1	R113	A2	R1019	C1	R2107	D1
C1010	C2	D1006	C1	R114	A2	R1021	C2	R2108	D1
C1011	C1	D1007	D1	R115	A2	R1022	D1	R2109	D1
C1012	C2	D1008	C2	R116	A1	R1023	D1	R2110	D1
C1013	C1	D1009	D2	R120	B1	R1024	D1	R2111	D2
C1014	D2	D1010	D1	R121	B1	R1027	D1	R2112	D2
C1015	D1	D1011	D1	R122	A1	R1028	D1	R2113	D1
C1016	C2	D1012	D1	R123	B1	R1029	D2	R2114	D1
C1017	C2	D1013	C2	R124	A1	R1030	D2	R2116	E1
C1018	D1	D1014	C1	R125	A2	R1031	D2	R2119	E1
C1019	C2	D1015	C2	R126	B1	R1032	D2	R2120	E1
C1020	C1	D1016	C2	R127	B1	R1033	D2	R2123	E1
C1021	C1	D1017	D1	R128	B1	R1034	D2	R2124	E1
C1024	B1	D2001	D1	R129	A1	R1035	D1	R2125	E1
C1025	D1	D2005	D1	R130	A2	R1036	D1	R2126	E1
C1026	D1	D2006	E1	R131	A2	R1037	C1	R2127	E1
C1027	D1	D2007	F1	R132	A2	R1038	C1	R2128	E1
C1028	D1	D2008	F1	R133	B1	R1039	C1	R2129	E1
C1029	D1	D2009	E1	R134	B2	R1041	D1	R2130	E1
C1030	D1			R135	B1	R1042	D1	R2131	E1
C1031	D2	F101	F2	R136	B1	R1043	D1	R2132	E1
C1032	D1			R137	B1	R1044	D1	R2133	E1
C1033	C1	IC101	B1	R139	B2	R1045	C2	R2134	E1
C1034	C2	IC1001	C1	R140	B2	R1047	D1	R2135	E1
C1035	C2	IC1002	C1	R141	B2	R1048	D1	R2138	F1
C1036	C1	IC1003	C2	R142	B1	R1049	D1		
C1037	C2	IC1004	D1	R143	B1	R1050	D1	RY101	A2
C1038	E1	IC1005	C1	R144	B1	R1051	D1	RY2001	E1
C1039	E1	IC1006	D1	R145	B1	R1052	D1		
C1040	D1	IC1007	D1	R146	B1	R1053	D1	T11	C1
C1041	D1	IC2001	D1	R147	B1	R1054	D1	T103	A1
C1042	E1	IC2002	D1	R148	B1	R1055	D1	T104	B2
C1043	E1	IC2003	D1	R149	B1	R1056	D1		
C1044	D1			R152	B2	R1057	D1	TH101	A2
C1045	D1	JC2001	E1	R153	B2	R1058	D1		
C1047	C2			R154	B2	R1059	C1	TP103	E2
C2001	D1	L101	E2	R155	B1	R1060	C1	TP2001	E1
C2002	D1	L102	E2	R156	B1	R1061	C1		
C2003	D1	L103	A1	R157	B1	R1062	C1	VDR1	E2
C2004	D1	L1001	D2	R158	B1	R1063	C1		

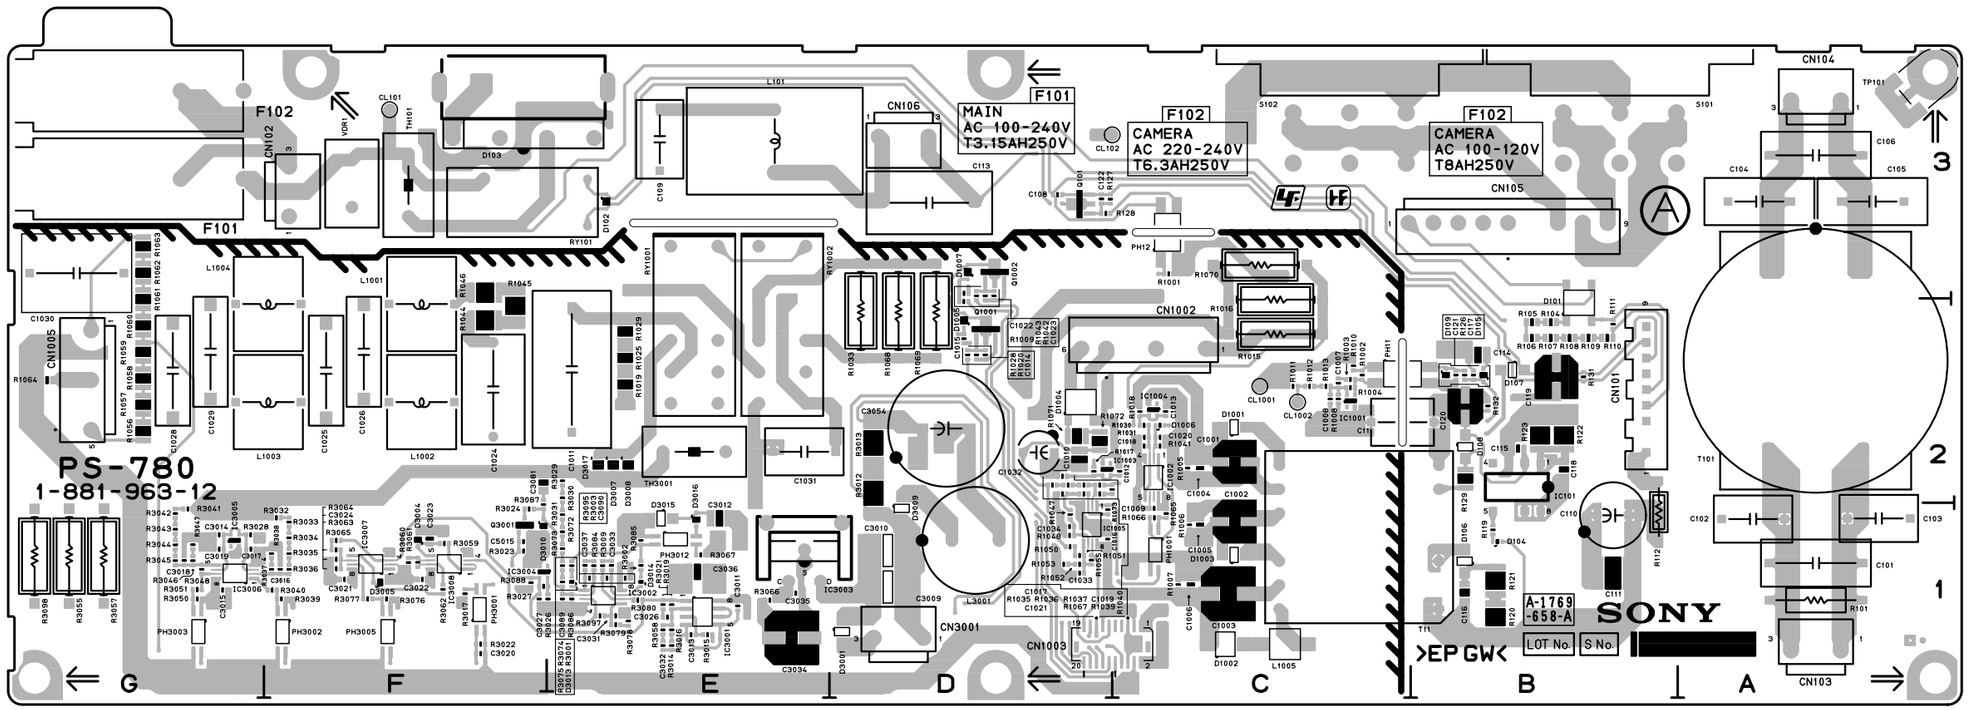

PS-780 -A SIDE-
SUFFIX: -12

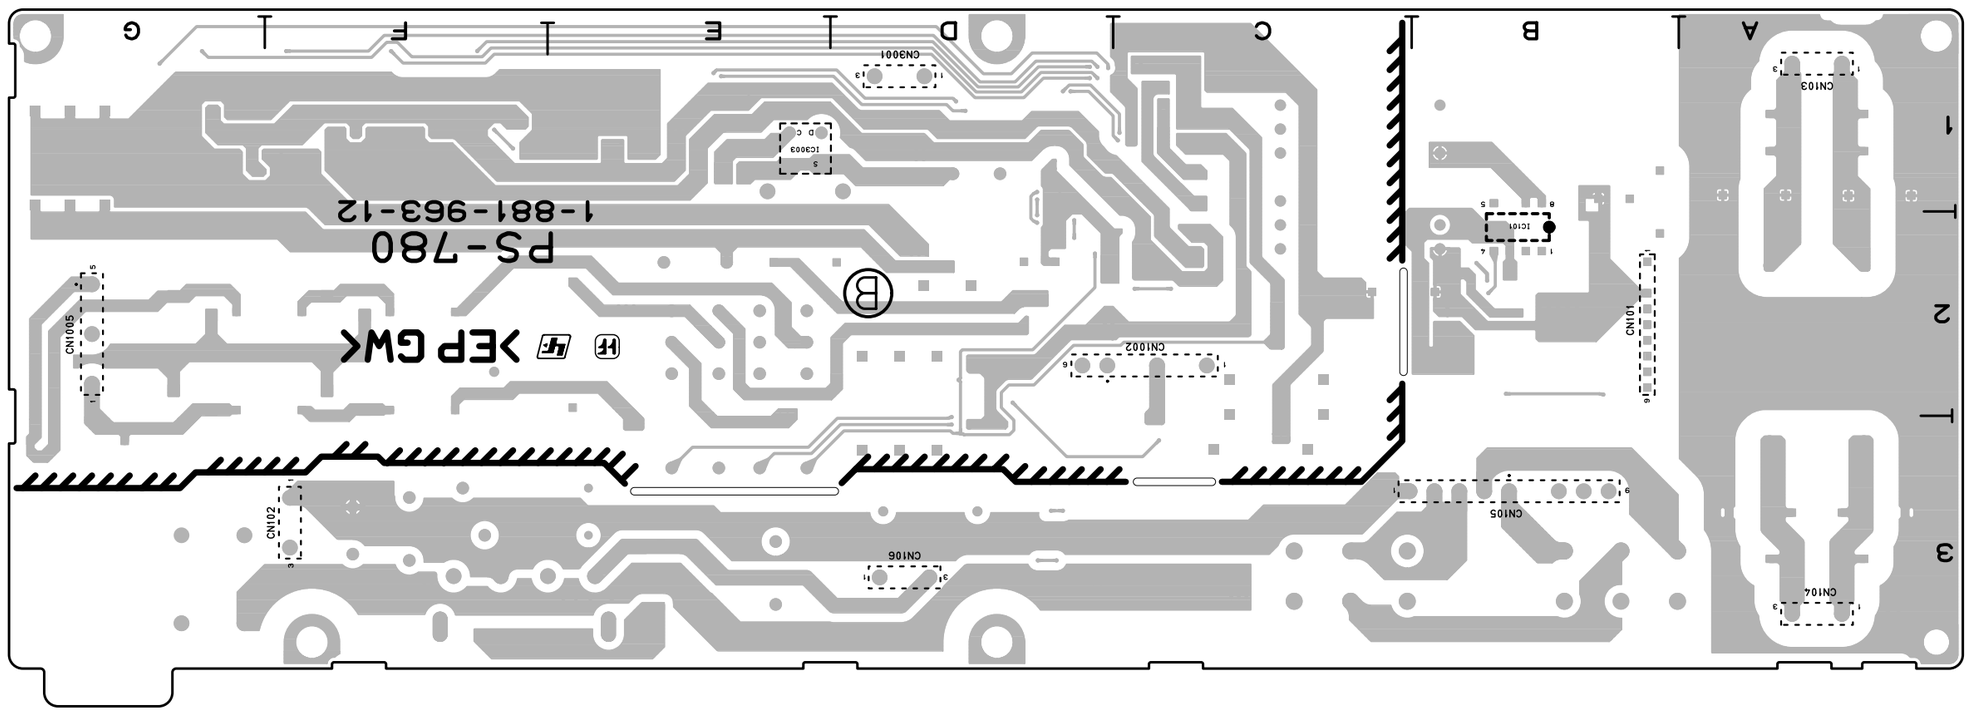

PS-780 -B SIDE-
SUFFIX: -12

PS-780 (1-881-963-12)

C11	C2	CN103	A1	R123	B2	R3035	F1
C101	A1	CN104	A3	R126	B2	R3036	F1
C102	A1	CN105	B3	R127	D3	R3037	F1
C103	A1	CN106	D3	R128	D3	R3038	F1
C104	A3	CN1002	C2	R129	B2	R3039	F1
C105	A3	CN1003	C1	R131	B2	R3040	F1
C106	A3	CN1005	G2	R132	B2	R3041	G1
C108	D3	CN3001	D1	R1001	C3	R3042	G1
C109	E3			R1002	C2	R3043	G1
C110	B1	D101	B2	R1003	C2	R3044	G1
C111	B1	D102	E3	R1004	C2	R3045	G1
C113	D3	D103	F3	R1005	C2	R3046	G1
C114	B2	D104	B1	R1006	C1	R3047	G1
C115	B2	D105	B2	R1007	C1	R3048	G1
C116	B1	D106	B1	R1008	C2	R3050	G1
C117	B2	D107	B2	R1009	D2	R3051	G1
C118	B2	D108	B2	R1010	C2	R3055	G1
C119	B2	D109	B2	R1011	C2	R3057	G1
C120	B2	D1001	C2	R1012	C2	R3058	E1
C121	B2	D1002	C1	R1013	C2	R3059	F1
C122	D3	D1003	C1	R1015	C2	R3060	F1
C1001	C2	D1004	D2	R1016	C2	R3061	F1
C1002	C1	D1005	D2	R1017	D2	R3062	F1
C1003	C1	D1006	C2	R1018	C2	R3063	F1
C1004	C2	D1007	D3	R1019	E2	R3064	F1
C1005	C1	D3001	D1	R1020	D2	R3065	F1
C1006	C1	D3004	F1	R1025	E2	R3066	E1
C1007	C2	D3005	F1	R1028	D2	R3067	E1
C1008	C2	D3007	E2	R1029	E2	R3072	E1
C1009	C1	D3008	E2	R1030	C2	R3073	E1
C1010	D2	D3009	D1	R1031	C2	R3074	E1
C1011	E2	D3010	F1	R1033	D2	R3075	E1
C1012	C2	D3013	E1	R1035	D2	R3076	F1
C1013	C2	D3014	E1	R1036	D2	R3077	F1
C1014	D2	D3015	E1	R1037	D2	R3078	E1
C1015	D2	D3016	E1	R1039	D2	R3079	E1
C1016	D1	D3017	E2	R1040	C2	R3080	E1
C1017	D2			R1041	C2	R3084	E1
C1018	C2	F101	G3	R1042	D3	R3085	E1
C1019	D2	F102	G3	R1043	D3	R3086	E1
C1020	C2			R1044	F2	R3087	F1
C1021	D2	IC101	B2	R1045	F2	R3088	F1
C1022	D3	IC1001	C2	R1046	F3	R3095	E1
C1023	D3	IC1002	C2	R1047	D1	R3097	E1
C1024	F2	IC1003	D2	R1048	D1	R3098	G1
C1025	F2	IC1004	C2	R1050	D1		
C1026	F2	IC1005	D1	R1051	D1	RY101	E3
C1028	G2	IC3001	E1	R1052	D1	RY1001	E2
C1029	G2	IC3002	E1	R1053	D1	RY1002	E2
C1030	G3	IC3003	E1	R1055	D1		
C1031	E2	IC3004	F1	R1056	G2	S101	B3
C1032	D2	IC3005	G1	R1057	G2	S102	C3
C1033	D1	IC3006	G1	R1058	G2		
C1034	D1	IC3007	F1	R1059	G2	T11	B1
C3009	D1	IC3008	F1	R1060	G2	T101	A3
C3010	D1			R1061	G2		
C3011	E1	L101	E3	R1062	G3	TH101	F3
C3012	E1	L1001	F2	R1063	G3	TH3001	E2
C3013	E1	L1002	F2	R1064	G2		
C3014	G1	L1003	F2	R1065	C1	TP101	A3
C3015	G1	L1004	F2	R1066	C1		
C3016	F1	L1005	C1	R1067	D2	VDR1	F3
C3017	G1	L3001	D1	R1068	D2		
C3018	G1			R1069	D2		
C3019	G1	PH11	C2	R1070	C3		
C3020	F1	PH12	C3	R1071	D2		
C3021	F1	PH1001	C1	R1072	D2		
C3022	F1	PH3001	F1	R1073	D1		
C3023	F1	PH3002	F1	R3001	E1		
C3024	F1	PH3003	G1	R3002	E1		
C3026	E1	PH3005	F1	R3003	E1		
C3027	F1	PH3012	E1	R3009	E1		
C3031	E1			R3012	D2		
C3032	E1	Q101	D3	R3013	D2		
C3033	E1	Q1001	D2	R3014	E1		
C3034	E1	Q1002	D3	R3015	E1		
C3035	E1	Q3001	F1	R3016	E1		
C3036	E1			R3017	F1		
C3037	E1	R101	A1	R3019	E1		
C3054	D2	R104	B2	R3021	E1		
C3081	F2	R105	B2	R3022	F1		
C3089	E1	R106	B2	R3023	F1		
C3090	E1	R107	B2	R3024	F1		
C5015	F1	R108	B2	R3026	E1		
		R109	B2	R3027	F1		
CL101	F3	R110	B2	R3028	G1		
CL102	C3	R111	B2	R3029	E2		
CL1001	C2	R112	B2	R3030	E2		
CL1002	C2	R119	B1	R3031	E1		
		R120	B1	R3032	F1		
CN101	B2	R121	B1	R3033	F1		
CN102	F3	R122	B2	R3034	F1		

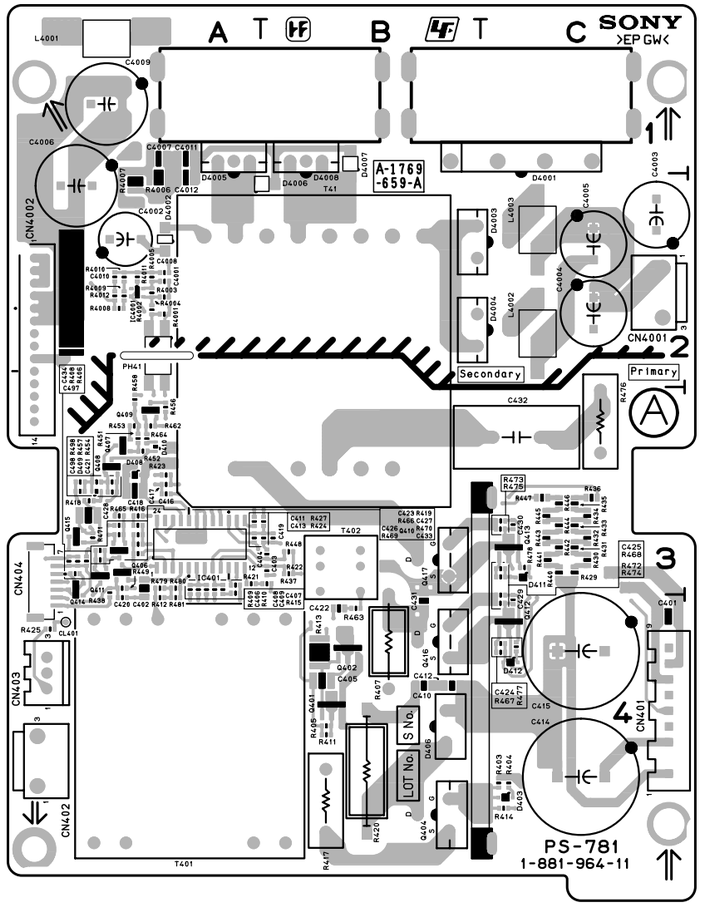

PS-781 -A SIDE-
SUFFIX: -11

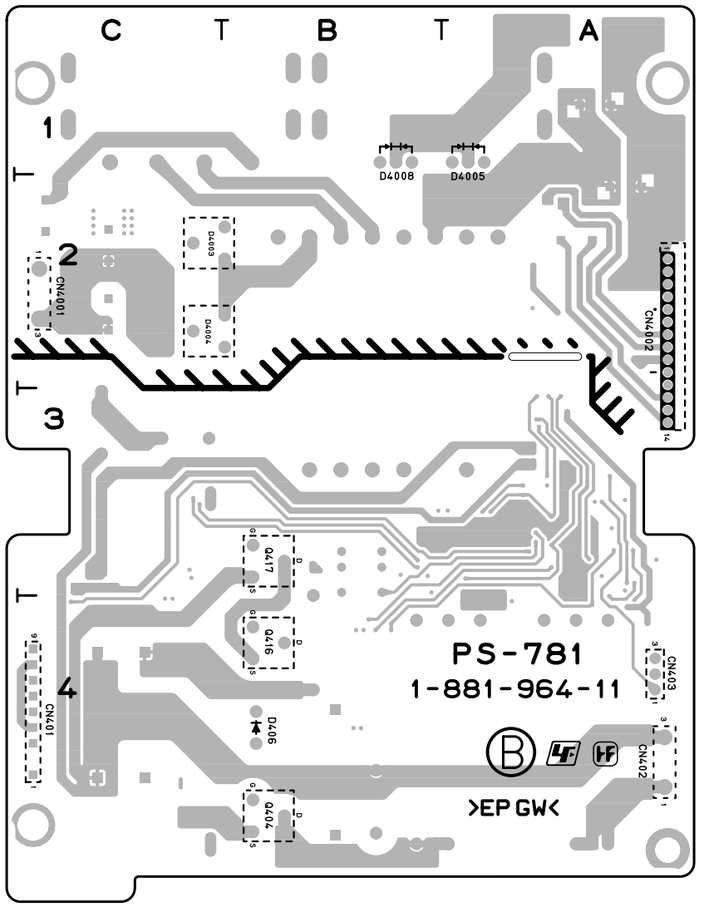

PS-781 -B SIDE-
SUFFIX: -11

PS-781 (1-881-964-11)

C401	C4	C423	A3	C4009	A1	D4002	A2	Q408	A3	R414	C4	R438	A3	R466	A3
C402	A3	C424	C4	C4010	A2	D4003	B2	Q409	A3	R415	A3	R440	C3	R467	C4
C403	B3	C425	C3	C4011	A1	D4004	B2	Q410	A3	R416	A3	R441	C3	R468	C3
C404	B3	C426	A3	C4012	A2	D4005	A1	Q411	A3	R417	B4	R442	C3	R469	A3
C405	B4	C427	A3			D4006	B2	Q412	C4	R418	A3	R443	C3	R470	A3
C406	A3	C428	A3	CL401	A4	D4007	B1	Q413	C3	R419	A3	R444	C3	R471	A3
C407	A3	C429	C4			D4008	B1	Q414	A3	R420	B4	R445	C3	R472	C4
C408	A3	C430	C3	CN401	C4			Q415	A3	R421	A3	R446	C3	R473	C3
C409	A3	C431	B4	CN402	A4	IC401	A3	Q416	B4	R422	B3	R447	C3	R474	C4
C410	B4	C432	C3	CN403	A4	IC4001	A2	Q417	B3	R423	A3	R448	B3	R475	C3
C411	A3	C433	A3	CN404	A3					R424	B3	R449	A3	R476	C3
C412	B4	C434	A3	CN4001	C2	L4001	A1	R403	C4	R425	A4	R451	A3	R477	C4
C413	A3	C497	A3	CN4002	A3	L4002	C2	R404	C4	R427	B3	R452	A3	R478	C3
C414	C4	C498	A3			L4003	C2	R405	B4	R429	C3	R453	A3	R479	A3
C415	C4	C4001	A2	D403	C4			R406	A3	R430	C3	R454	A3	R480	A3
C416	A3	C4002	A2	D406	B4	PH41	A2	R407	B4	R431	C3	R456	A3	R481	A4
C417	A3	C4003	C2	D408	A3			R408	A3	R432	C3	R457	A3	R498	A3
C418	A3	C4004	C2	D409	A3	Q401	B4	R409	A3	R433	C3	R458	A3	R4001	A2
C419	B3	C4005	C2	D410	A3	Q402	B4	R410	A3	R434	C3	R462	A3	R4002	A2
C420	A4	C4006	A2	D411	C3	Q404	B4	R411	B4	R435	C3	R463	B4	R4003	A2
C421	A3	C4007	A1	D412	C4	Q406	A3	R412	A4	R436	C3	R464	A3	R4004	A2
C422	B4	C4008	A2	D4001	C1	Q407	A3	R413	B4	R437	B3	R465	A3	R4005	A2

R4006	A2
R4007	A2
R4008	A2
R4009	A2
R4010	A2
R4011	A2
R4012	A2
T41	A2
T401	A4
T402	B3

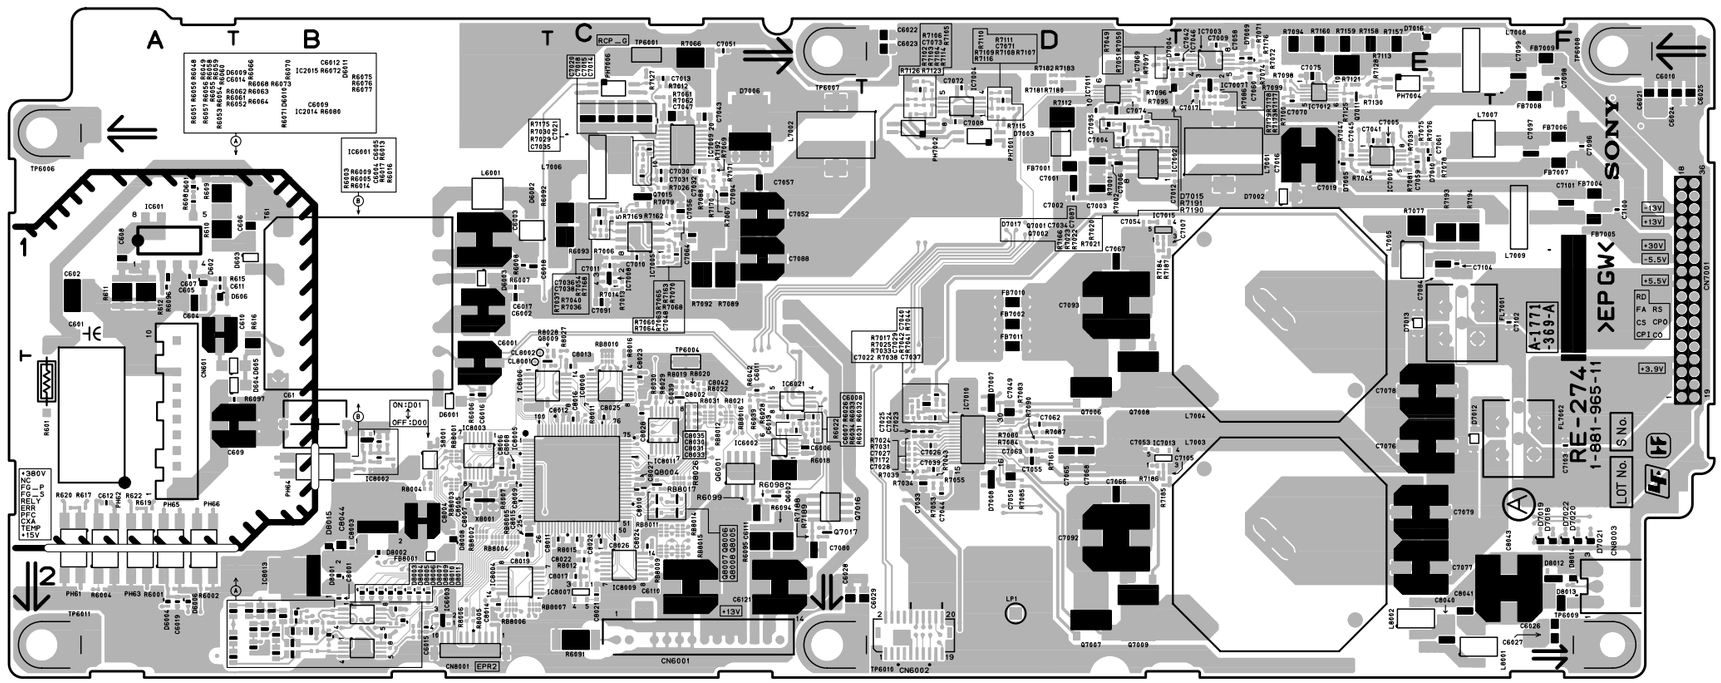
SONY
RE-274
1-981-965-11
A-1771-369-A
LOT No.
S No.
CN6001
CN6003
IC601
CN601
CN8001
EPR2
TP6001
TP6002
TP6003
TP6004
TP6005
TP6006
TP6007
TP6008
TP6009
TP6010
TP6011
TP6012
TP6013
TP6014
TP6015
TP6016
TP6017
TP6018
TP6019
TP6020
TP6021
TP6022
TP6023
TP6024
TP6025
TP6026
TP6027
TP6028
TP6029
TP6030
TP6031
TP6032
TP6033
TP6034
TP6035
TP6036
TP6037
TP6038
TP6039
TP6040

RE-274 (1-881-965-11)
---

*:B SIDE

C61	B2	C7049	D2	CN601	A2	IC7015	D1	R6034	C2	R7075	E1	R8022	C2
C601	A1	C7050	D2	CN6001	C2	IC8002	B2	R6039	C2	R7076	E1	R8026	C2
C602	A1	C7051	C1	CN6002	D2	IC8003	B2	R6042	C2	R7077	E1	R8027	C1
C604	A1	C7052	C1	CN7001*	F2	IC8004	B2	R6048	A2	R7078	E1	R8028	C1
C605	A1	C7053	D2	CN8001	B2	IC8005	C2	R6049	B2	R7079	C1	R8029	C2
C606	B1	C7054	D1	CN8003	F2	IC8006	B2	R6050	A2	R7080	D2	R8030	C2
C607	A1	C7055	D2			IC8007	C2	R6051	A2	R7081	E1	R8031	C2
C608	A1	C7056	C1	D601	A1	IC8008	C2	R6052	B2	R7083	D2		
C609	B2	C7057	C1	D602	A1	IC8009	C2	R6053	B2	R7084	D2	RB8001	B2
C610	A1	C7058	E1	D603	B1	IC8011	C2	R6054	B2	R7085	D2	RB8002	B2
C611	A1	C7059	E1	D604	B2	IC8013	B2	R6055	B2	R7086	E1	RB8003	B2
C612	A2	C7060	E1	D605	B2			R6056	B2	R7087	D2	RB8004	B2
C6001	B2	C7061	E1	D606	A1	L6001	B1	R6057	B2	R7088	C1	RB8005	B2
C6002	B1	C7062	D2	D6001	B2	L7001	E1	R6058	B2	R7089	C1	RB8006	B2
C6003	B1	C7063	D2	D6002	B1	L7002	C1	R6059	B2	R7090	D2	RB8007	B2
C6004	B2	C7064	C1	D6003	B1	L7003	E2	R6060	B2	R7092	C1	RB8009	C2
C6005	B2	C7065	D2	D6004	A2	L7004	E1	R6061	B2	R7094	E1	RB8010	C2
C6006	C2	C7066	D2	D6006	A2	L7005	E1	R6062	B2	R7095	D1	RB8011	C2
C6007	C2	C7067	D1	D6009	B2	L7006	C1	R6063	B2	R7096	D1	RB8012	C2
C6008	C2	C7068	D2	D6010	B2	L7007	E1	R6064	B2	R7097	D1	RB8014	C2
C6009	B2	C7069	D1	D6011	B2	L7008	E1	R6066	B2	R7098	E1	RB8015	C2
C6010	F1	C7070	E1	D7002	E1	L7009	F1	R6068	B2	R7099	E1	RB8016	C2
C6011	C2	C7071	D1	D7003	D1	L8001	E2	R6070	B2	R7100	E1	RB8017	C2
C6012	B2	C7072	D1	D7004	D1	L8002	E2	R6071	B2	R7102	D1		
C6013	C2	C7073	D1	D7005	E1			R6072	B2	R7103	D1	S8001	B2
C6014	B2	C7074	D1	D7006	C1	LP1	D2	R6073	B2	R7104	D1		
C6015	B2	C7075	E1	D7007	D2			R6075	B2	R7105	D1	T61	B1
C6016	B2	C7076	E2	D7008	D2	PH61	A2	R6076	B2	R7106	D1		
C6017	B1	C7077	E2	D7009	E1	PH62	A2	R6077	B2	R7107	D1	TP6001	C1
C6018	B1	C7078	E2	D7010	E1	PH63	A2	R6080	B2	R7108	D1	TP6004	C2
C6019	A2	C7079	E2	D7012	E2	PH64	B2	R6091	C2	R7109	D1	TP6006	A1
C6021	F1	C7080	C2	D7013	E1	PH65	A2	R6092	C1	R7110	D1	TP6007	C1
C6022	D1	C7084	E1	D7015	D1	PH66	A2	R6093	C1	R7111	D1	TP6008	F1
C6023	D1	C7087	D1	D7016	E1	PH7001	D1	R6094	C2	R7112	D1	TP6009	F2
C6024	F1	C7088	C1	D7017	D1	PH7002	D1	R6095	C2	R7113	E1	TP6010	C2
C6025	F1	C7091	C1	D7018	F2	PH7004	E1	R6096	A1	R7114	D1	TP6011	A2
C6026	F2	C7092	D2	D7019	F2	PH7006	C1	R6097	B2	R7115	D1		
C6027	F2	C7093	D1	D7020	F2			R6098	C2	R7116	D1	X8001	B2
C6028	C2	C7094	C1	D7021	F2	Q6001	C2	R6099	C2	R7121	E1		
C6029	D2	C7095	D1	D7022	F2	Q6002	C2	R7001	D1	R7123	D1		
C6110	C2	C7096	F1	D8001	B2	Q7001	D1	R7002	D1	R7125	E1		
C6111	C2	C7097	F1	D8002	B2	Q7002	D1	R7006	C1	R7126	D1		
C6121	C2	C7098	F1	D8003	B2	Q7006	D2	R7012	C1	R7127	C1		
C7001	D1	C7099	F1	D8004	B2	Q7007	D2	R7013	C1	R7128	E1		
C7002	D1	C7100	F1	D8005	B2	Q7008	D2	R7014	C1	R7130	E1		
C7003	D1	C7101	F1	D8006	B2	Q7009	D2	R7017	D2	R7157	E1		
C7004	D1	C7102	F1	D8007	B2	Q7011	E1	R7020	D1	R7158	E1		
C7005	E1	C7103	F2	D8008	B2	Q7015	C1	R7021	D1	R7159	E1		
C7006	D1	C7104	E1	D8009	B2	Q7016	C2	R7022	D1	R7160	E1		
C7008	D1	C7105	D2	D8010	B2	Q7017	C2	R7023	D1	R7161	D2		
C7009	E1	C7107	D1	D8011	B2	Q8002	C2	R7024	D2	R7162	C1		
C7010	C1	C8001	B2	D8012	F2	Q8004	C2	R7025	D2	R7163	C1		
C7011	C1	C8003	B2	D8013	F2	Q8005	C2	R7026	C1	R7166	D1		
C7012	D1	C8004	B2	D8014	F2	Q8006	C2	R7029	C1	R7168	C1		
C7013	C1	C8005	B2	D8015	B2	Q8007	C2	R7030	C1	R7169	C1		
C7014	C1	C8006	B2			Q8008	C2	R7031	D2	R7170	C1		
C7015	C1	C8007	B2	FB7001	D1	Q8009	B2	R7033	D2	R7171	C1		
C7016	E1	C8008	B2	FB7002	D1			R7034	D2	R7172	D2		
C7017	E1	C8009	B2	FB7004	F1	R601	A2	R7035	E1	R7173	E1		
C7018	C1	C8010	C2	FB7005	F1	R608	A1	R7036	C1	R7175	C1		
C7019	E1	C8011	C2	FB7006	F1	R609	A1	R7037	C1	R7176	E1		
C7020	C1	C8012	C2	FB7007	F1	R610	A1	R7038	D2	R7177	E1		
C7021	C1	C8013	C2	FB7008	F1	R611	A1	R7039	D2	R7178	E1		
C7022	D2	C8014	B2	FB7009	F1	R612	A1	R7040	C1	R7179	E1		
C7023	D2	C8015	B2	FB7010	D1	R615	A1	R7041	D2	R7180	D1		
C7024	D2	C8016	C2	FB7011	D1	R616	B1	R7042	D2	R7181	D1		
C7025	D2	C8017	C2	FB8001	B2	R617	A2	R7043	D2	R7182	D1		
C7026	D2	C8019	B2			R619	A2	R7044	D2	R7183	D1		
C7027	D2	C8020	C2	FL7001	E1	R620	A2	R7045	E1	R7184	D1		
C7028	D2	C8021	C2	FL7002	F2	R622	A2	R7047	E1	R7185	D2		
C7029	D2	C8022	C2			R6001	A2	R7049	D1	R7186	D2		
C7030	C1	C8023	C2	IC601	A1	R6002	A2	R7050	D1	R7187	D1		
C7031	C1	C8024	C2	IC2014	B2	R6003	B2	R7051	D1	R7188	C2		
C7032	C1	C8025	C2	IC2015	B2	R6004	A2	R7053	D2	R7189	C2		
C7033	D2	C8026	C2	IC6001	B2	R6005	B2	R7054	C1	R7190	D1		
C7034	D1	C8027	C2	IC6002	C2	R6006	B2	R7055	D2	R7191	D1		
C7035	C1	C8028	C2	IC6003	B2	R6007	B1	R7060	C1	R7192	C1		
C7036	C1	C8030	C2	IC6021	C2	R6008	B1	R7061	C1	R7193	E1		
C7037	D2	C8031	C2	IC7001	E1	R6009	B2	R7062	C1	R7194	E1		
C7038	C1	C8033	C2	IC7002	D1	R6013	B2	R7063	C1	R8004	B2		
C7039	D2	C8035	C2	IC7003	E1	R6014	B2	R7064	C1	R8005	B2		
C7040	D2	C8039	C2	IC7004	D1	R6016	B2	R7065	C1	R8006	B2		
C7041	E1	C8040	E2	IC7005	C1	R6017	B2	R7066	C1	R8007	B2		
C7042	E1	C8041	E2	IC7007	E1	R6018	C2	R7067	C1	R8011	C2		
C7043	C1	C8042	C2	IC7008	C1	R6022	C2	R7068	C1	R8012	C2		
C7044	D2	C8043	F2	IC7009	C1	R6026	C2	R7069	C1	R8015	C2		
C7045	E1	C8044	B2	IC7010	D2	R6028	C2	R7070	C1	R8016	C2		
C7046	E1			IC7011	D1	R6031	C2	R7071	E1	R8019	C2		
C7047	C1	CL8001	B2	IC7012	E1	R6032	C2	R7072	E1	R8020	C2		
C7048	C1	CL8002	B1	IC7013	D2	R6033	C2	R7074	E1	R8021	C2		

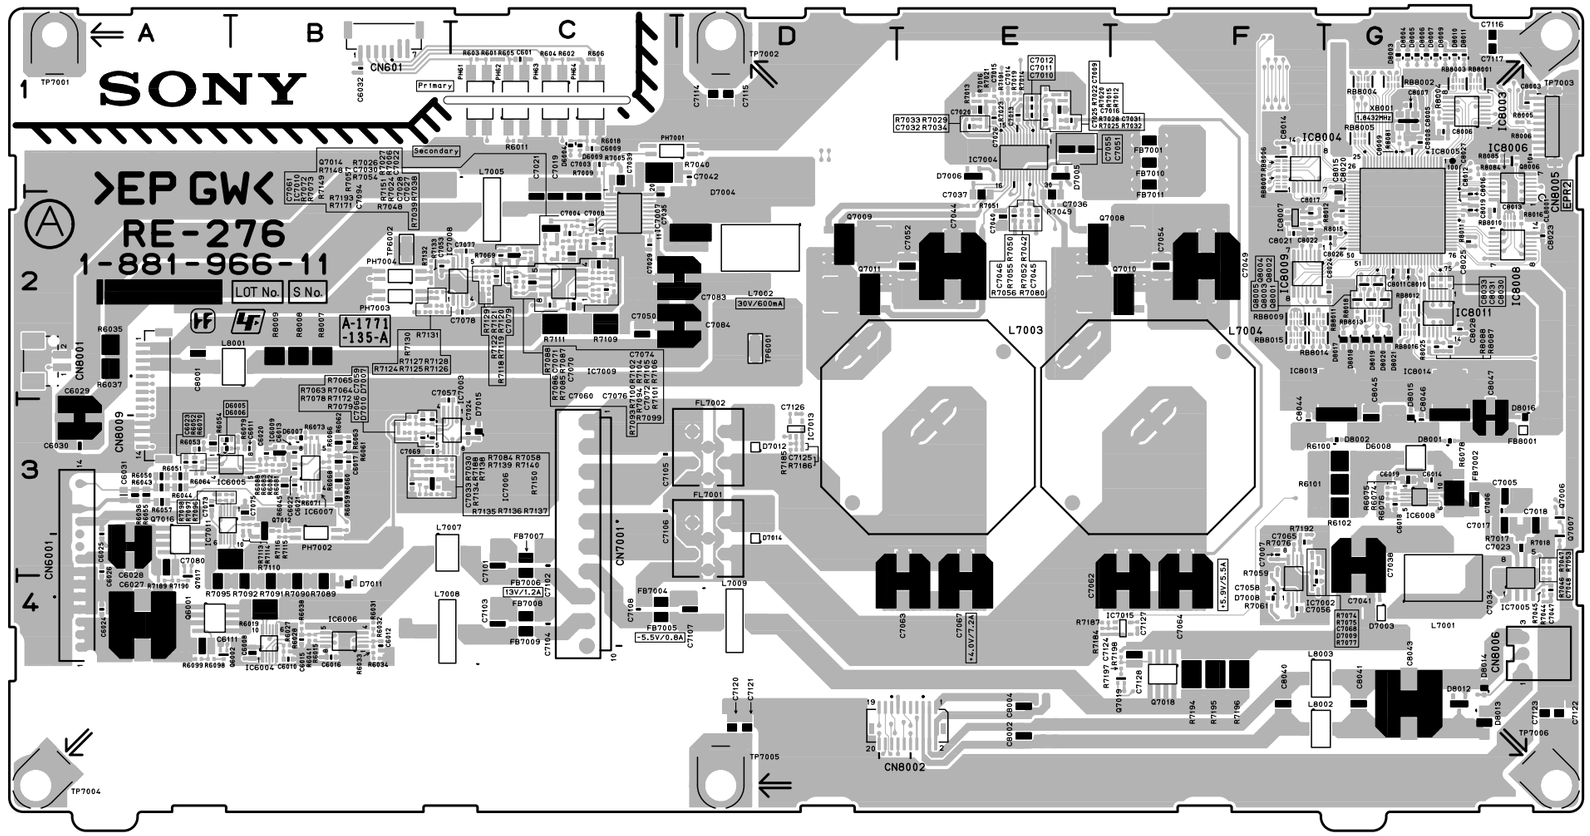

RE-276 -A SIDE-
SUFFIX: -11

RE-276 (1-881-966-11)

C601	C1	C7003	C1	C7030	C2	C7058	F4	C7102	C3	C8008	G1	C8045	G3	D7009	F4
C6008	B4	C7004	C2	C7031	E1	C7059	B3	C7103	C4	C8009	G1	C8046	G3	D7010	B3
C6009	C1	C7005	G3	C7032	E1	C7060	C2	C7104	C4	C8010	G2	C8047	G3	D7011	B4
C6010	B4	C7006	G3	C7033	B3	C7061	C2	C7105	C3	C8011	G2			D7012	D3
C6011	B3	C7007	F3	C7034	G4	C7062	F4	C7106	C3	C8012	G2	CL8001	G2	D7014	D3
C6012	B4	C7008	C2	C7035	C2	C7063	E4	C7107	D4	C8013	G2			D7015	C3
C6013	B3	C7009	E1	C7036	E2	C7064	F4	C7108	C4	C8014	F1	CN601	B1	D8001	G3
C6014	G3	C7010	E1	C7037	E2	C7065	F3	C7114	D1	C8015	G2	CN6001	A3	D8002	G3
C6015	B4	C7011	E1	C7038	G3	C7066	B3	C7115	D1	C8016	G2	CN7001	C3	D8003	G1
C6016	B4	C7012	E1	C7039	C1	C7067	E4	C7116	G1	C8017	F2	CN8001	A2	D8004	G1
C6017	B3	C7013	E1	C7040	E2	C7068	F3	C7117	G1	C8019	G2	CN8002	E4	D8005	G1
C6018	G3	C7014	E1	C7041	G4	C7069	B3	C7120	D4	C8020	G2	CN8005	G1	D8006	G1
C6019	G3	C7015	E1	C7042	D1	C7070	C2	C7121	D4	C8021	F2	CN8006	G4	D8007	G1
C6020	B3	C7016	E1	C7044	E2	C7071	C2	C7122	G4	C8022	F2	CN8009	A2	D8009	G1
C6021	B3	C7017	G3	C7045	E2	C7072	C2	C7123	G4	C8023	G2			D8010	G1
C6022	B3	C7018	G3	C7046	E2	C7073	A3	C7124	E4	C8024	G2	D6004	C1	D8011	G1
C6023	A3	C7019	C2	C7047	G4	C7074	C2	C7125	D3	C8025	G2	D6005	A3	D8012	G4
C6024	A4	C7020	E1	C7048	G4	C7075	B3	C7126	D3	C8026	G2	D6006	A3	D8013	G4
C6025	A3	C7021	C2	C7049	F2	C7076	C2	C7127	F4	C8027	G2	D6007	B3	D8014	G4
C6026	A3	C7022	C2	C7050	C2	C7077	C2	C7128	F4	C8028	G2	D6008	G3	D8015	G3
C6027	A4	C7023	G3	C7051	E1	C7078	C2	C8001	A2	C8030	G2	D6009	C1	D8016	G3
C6028	A3	C7024	C3	C7052	E2	C7079	C2	C8002	E4	C8031	G2	D7003	G4	D8017	G2
C6029	A3	C7025	E1	C7053	B2	C7080	A3	C8003	G1	C8033	G2	D7004	D2	D8018	G2
C6030	A3	C7026	E1	C7054	F2	C7083	D2	C8004	E4	C8040	F4	D7005	E1	D8019	G2
C6031	A3	C7027	C2	C7055	E1	C7084	D2	C8005	G1	C8041	G4	D7006	E1	D8020	G2
C6032	B1	C7028	C2	C7056	F4	C7094	C2	C8006	G1	C8043	G4	D7007	B3	D8021	G2
C6111	A4	C7029	C2	C7057	B3	C7101	C3	C8007	G1	C8044	F3	D7008	F4		

FB7001	F1	IC7008	C2	L8003	F4	Q8003	G2	R6044	A3	R6083	B3	R7028	E1	R7061	F4
FB7002	G3	IC7009	C2			Q8004	G2	R6045	B3	R6088	B3	R7029	E1	R7063	B3
FB7004	C4	IC7010	C2	PH61	C1	Q8005	G2	R6050	A3	R6098	A4	R7030	B3	R7064	B3
FB7005	C4	IC7011	A3	PH62	C1	Q8006	G1	R6051	A3	R6099	A4	R7032	E1	R7065	B3
FB7006	C3	IC7013	D3	PH63	C1			R6052	A3	R6100	G3	R7033	E1	R7069	C2
FB7007	C3	IC7015	F4	PH64	C1	R601	C1	R6053	A3	R6101	G3	R7034	E1	R7072	C2
FB7008	C4	IC8003	G1	PH7001	C1	R602	C1	R6054	A3	R6102	G3	R7038	C2	R7073	C2
FB7009	C4	IC8004	F1	PH7002	B3	R603	C1	R6055	A3	R7005	C1	R7039	C2	R7074	F3
FB7010	F1	IC8005	G2	PH7003	B2	R604	C1	R6057	A3	R7006	C2	R7040	C1	R7075	F3
FB7011	F1	IC8006	G1	PH7004	B2	R605	C1	R6059	B3	R7009	C1	R7042	E2	R7076	F3
FB8001	G3	IC8007	F2			R606	C1	R6060	B3	R7012	E1	R7044	G4	R7077	F4
		IC8008	G2	Q6001	A4	R6011	C1	R6061	B3	R7013	E1	R7045	G4	R7078	B3
FL7001	D3	IC8009	F2	Q6002	A4	R6015	B4	R6062	B3	R7014	E1	R7046	G4	R7079	B3
FL7002	D3	IC8011	G2	Q7006	G3	R6018	C1	R6063	B3	R7015	E1	R7047	G3	R7080	E2
		IC8013	G3	Q7007	G3	R6019	B4	R6064	A3	R7016	E1	R7048	C2	R7084	B3
IC6004	B4	IC8014	G3	Q7008	F2	R6027	B4	R6066	B3	R7017	G3	R7049	E2	R7085	C2
IC6005	B3			Q7009	D2	R6028	B4	R6068	B3	R7018	G3	R7050	E2	R7086	C2
IC6006	B4	L7001	G4	Q7010	F2	R6031	B4	R6070	A3	R7019	E1	R7051	E2	R7087	C2
IC6007	B3	L7002	D2	Q7011	D2	R6032	B4	R6071	B3	R7020	E1	R7052	E2	R7088	C2
IC6008	G3	L7003	E2	Q7012	B3	R6033	B4	R6073	B3	R7021	E1	R7053	G3	R7089	B4
IC6009	B3	L7004	F2	Q7014	C2	R6034	B4	R6074	G3	R7022	E1	R7054	C2	R7090	B4
IC7002	F4	L7005	C2	Q7016	A3	R6035	A2	R6075	G3	R7023	E1	R7055	E2	R7091	B4
IC7003	B3	L7007	B3	Q7017	A4	R6036	A3	R6076	G3	R7024	C2	R7056	E2	R7092	B4
IC7004	E1	L7008	B4	Q7018	F4	R6037	A2	R6078	G3	R7025	E1	R7057	C2	R7093	C2
IC7005	G4	L7009	D4	Q7019	F4	R6038	B4	R6079	B3	R7026	C2	R7058	B3	R7094	C2
IC7006	B3	L8001	B2	Q8001	G2	R6041	B4	R6081	B3	R7027	C2	R7059	F3	R7095	A4
IC7007	C2	L8002	F4	Q8002	G2	R6043	A3	R6082	B3					R7096	B3

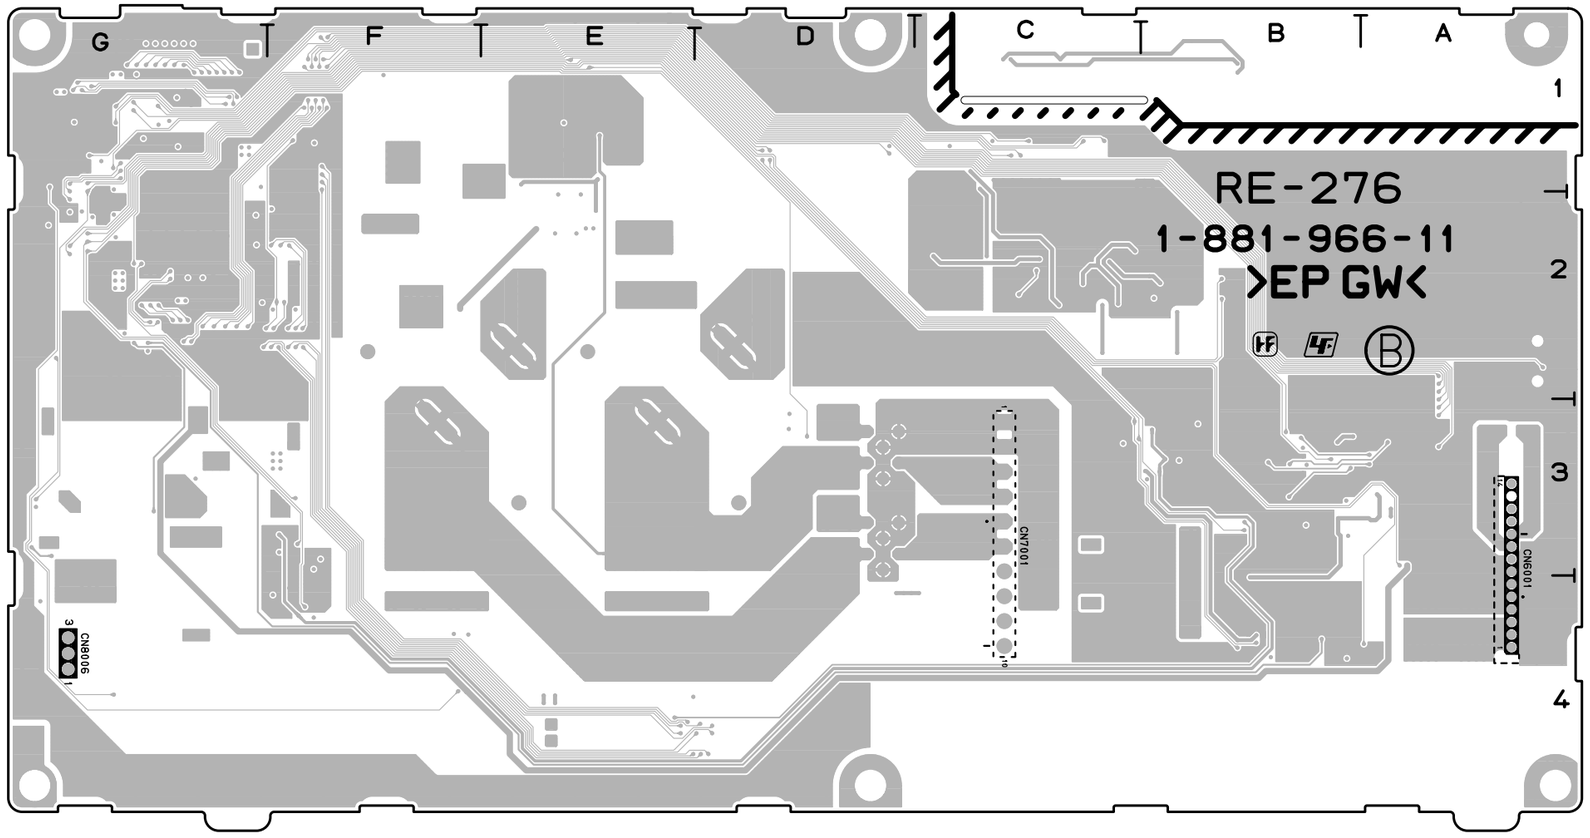

RE-276 -B SIDE-
SUFFIX: -11

R7097	A3	R7130	B2	R7194	F4	RB8005	G1
R7098	A3	R7131	B2	R7195	F4	RB8006	F1
R7099	C2	R7132	B2	R7196	F4	RB8007	F1
R7100	C2	R7133	B2	R7197	F4	RB8009	F2
R7101	C2	R7134	B3	R7198	F4	RB8010	G2
R7102	C2	R7135	B3	R8004	G1	RB8011	F2
R7104	C2	R7136	B3	R8005	G1	RB8012	G2
R7105	C2	R7137	B3	R8006	G1	RB8013	G2
R7106	C2	R7138	B3	R8007	B2	RB8014	F2
R7109	C2	R7139	B3	R8008	B2	RB8015	F2
R7110	A3	R7140	B3	R8009	B2	RB8016	G2
R7111	C2	R7148	C2	R8011	G2		
R7113	B3	R7149	C2	R8012	F2	TP6001	D2
R7114	B3	R7150	C3	R8015	G2	TP6002	B2
R7115	B3	R7151	C2	R8016	G2	TP7001	A1
R7116	B3	R7171	C2	R8018	G2	TP7002	D1
R7118	C2	R7172	B3	R8025	G2	TP7003	G1
R7119	C2	R7184	E4	R8081	G1	TP7004	A4
R7120	C2	R7185	D3	R8084	G1	TP7005	D4
R7121	C2	R7186	D3	R8085	G1	TP7006	G4
R7122	C2	R7187	E4	R8087	G2		
R7124	B2	R7188	B3	R8088	G2	X8001	G1
R7125	B2	R7189	A4				
R7126	B2	R7190	A4	RB8001	G1		
R7127	B2	R7191	E1	RB8002	G1		
R7128	B2	R7192	F3	RB8003	G1		
R7129	C2	R7193	C2	RB8004	G1		

SAFETY CHECK-OUT

After correcting the original service problem, perform the following safety checks before releasing the set to the customer :

Check the metal trim, “metallized” knobs, screws, and all other exposed metal parts for AC leakage. Check leakage as described below.

LEAKAGE TEST

The AC leakage from any exposed metal part to earth ground and from all exposed metal parts to any exposed metal part having a return to chassis, must not exceed 3.5 mA. Leakage current can be measured by any one of three methods.

1. A commercial leakage tester, such as the Simpson 229 or RCA WT-540A. Follow the manufacturers’ instructions to use these instruments.
2. A battery-operated AC milliammeter. The Data Precision 245 digital multimeter is suitable for this job.
3. Measuring the voltage drop across a resistor by means of a VOM or battery-operated AC voltmeter. The “limit” indication is 5.25 V, so analog meters must have an accurate low-voltage scale. The Simpson 250 and Sanwa SH-63Trd are examples of a passive VOM that is suitable. Nearly all battery operated digital multimeters that have a 20 V AC range are suitable. (See Fig. A)

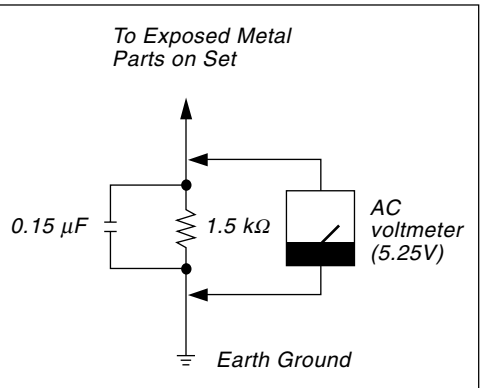

Fig A. Using an AC voltmeter to check AC leakage.

HDCU1000 (UC)
HDCU1000 (J)
HDCU1000 (CE)
HDCU1000 (E3)
HDCU1000 (E2)
HDCU1080 (CN)
HDCU1500 (SY)
HDCU1500 (J)
HKCU1001 (SY)
HKCU1003 (SY)
HKCU1005 (SY) J, E
9-968-208-06

Sony Corporation

Printed in Japan
2010. 11 08
©2005